ETSI TS 138 533 V18.6.1 (2025-05)

5G;
NR;
User Equipment (UE) conformance specification;
Radio Resource Management (RRM)
(3GPP TS 38.533 version 18.6.1 Release 18)

Reference
RTS/TSGR-0538533vi61

Keywords
5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
ETSI Search & Browse Standards application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on ETSI deliver repository.

Users should be aware that the present document may be revised or have its status changed,
this information is available in the Milestones listing.

If you find errors in the present document, please send your comments to
the relevant service listed under Committee Support Staff.

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure (CVD) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.
No recommendation as to products and services or vendors is made or should be implied.
No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.
In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.
The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI IPR online database.

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM**® and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at 3GPP to ETSI numbering cross-referencing.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the ETSI Drafting Rules (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights 2
Legal Notice 2
Modal verbs terminology 2
Foreword 65
1 Scope 66
2 References 66
3 Definitions, symbols and abbreviations 67
3.1 Definitions 67
3.2 Symbols 68
3.3 Abbreviations 69
3A Requirements for the support of RRM 71
3A.1 General 71
3A.1.0 Overview of RRM requirements 71
3A.1.1 Test coverage across 5G NR connectivity options 72
3A.2 Requirements Classification for Statistical Testing 72
3A.3 Antenna Configuration 73
3A.4 NR band groups 73
3A.4.0 General 73
3A.4.1 NR operating bands in FR1 73
3A.4.1A NR operating bands for satellite access in FR1 74
3A.4.2 NR operating bands in FR2 75
3A.5 NR operating band configuration 76
3A.6 UE with Multiband Capability 76
4 EN-DC with all NR cells in FR1 77
4.0 General 77
4.1 Void 77
4.2 Void 77
4.3 RRC_CONNECTED state mobility 77
4.3.1 Void 77
4.3.2 RRC connection mobility control 77
4.3.2.1 Void 77
4.3.2.2 Random access 77
4.3.2.2.1 EN-DC FR1 contention based random access 77
4.3.2.2.2 EN-DC FR1 non-contention based random access 83
4.3.2.2.3 EN-DC FR1 2-step contention based random access 90
4.3.2.2.4 EN-DC FR1 2-step non-contention based random access 96
4.3.2.3 Void 102
4.4 Timing 102
4.4.1 UE transmit timing 102
4.4.1.0 Minimum conformance requirements 102
4.4.1.0.1 Minimum conformance requirements for UE transmit timing accuracy 102
4.4.1.1 EN-DC FR1 UE transmit timing accuracy 104
4.4.2 UE timer accuracy 109
4.4.3 Timing advance 109
4.4.3.0 Minimum conformance requirements 109
4.4.3.0.1 Minimum conformance requirements for timing advance adjustment accuracy 109
4.4.3.0.2 Minimum conformance requirements for timing advance adjustment delay 110
4.4.3.1 EN-DC FR1 timing advance adjustment accuracy 110
4.5 Signaling characteristics 115
4.5.1 Radio link monitoring 115
4.5.1.00 General 115
4.5.1.0 Minimum conformance requirements 115
4.5.1.0.1 Minimum conformance requirements for out-of-sync SSB-based RLM 115

4.5.1.0.2 Void 116
4.5.1.0.3 Minimum conformance requirements for out-of-sync CSI-RS based RLM 116
4.5.1.0.4 Minimum conformance requirements for in-sync CSI-RS based RLM 117
4.5.1.0.5 Requirements for UE configured with Relaxed Measurement Criteria 119
4.5.1.1 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode 120
4.5.1.2 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode 125
4.5.1.3 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode 130
4.5.1.4 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode 135
4.5.1.5 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode 140
4.5.1.6 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode 145
4.5.1.7 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode 150
4.5.1.8 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode 155
4.5.1.9 EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion 160
4.5.2 Interruption 165
4.5.2.0 Minimum conformance requirements 165
4.5.2.0.1 Minimum conformance requirements for interruptions at transitions between active and non-active during DRX. 166
4.5.2.0.2 Minimum conformance requirements for interruptions during measurements on deactivated NR SCC 166
4.5.2.0.3 Minimum conformance requirements for interruptions during measurements on deactivated E-UTRAN SCC 167
4.5.2.0.4 Minimum conformance requirements for interruptions at NR SRS carrier based switching 167
4.5.2.0.5 Minimum conformance requirements for interruptions at E-UTRA SRS carrier based switching 169
4.5.2.0.6 Minimum conformance requirements for interruptions due to RRM and RLM/BFD measurements on deactivated NR SCG 170
4.5.2.1 EN-DC FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC 170
4.5.2.2 EN-DC FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC 174
4.5.2.3 EN-DC FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC 178
4.5.2.4 EN-DC FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC 184
4.5.2.5 EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC 190
4.5.2.6 EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC 196
4.5.2.7 200
4.5.2.8 E-UTRAN - NR FR1 interruptions at NR SRS carrier based switching in asynchronous EN-DC 200
4.5.2.9 E-UTRAN - NR FR1 interruptions at E-UTRA SRS carrier based switching 206
4.5.2.10 EN-DC FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell 210
4.5.3 SCell activation and deactivation delay 214
4.5.3.0 Minimum conformance requirements 214
4.5.3.0.1 SCell activation and deactivation delay 214
4.5.3.1 EN-DC FR1 SCell activation and deactivation of known SCell in non-DRX for 160ms SCell measurement cycle 218
4.5.3.2 EN-DC FR1 SCell activation and deactivation of known SCell in non-DRX for 640ms SCell measurement cycle 229
4.5.3.3 EN-DC FR1 SCell activation and deactivation of unknown SCell in non-DRX 230
4.5.3.4 SCell activation and deactivation of multiple unknown SCells in FR1 with single activation/deactivation command 232
4.5.3.5 EN-DC FR1 direct SCell activation at SCell addition of known SCell 238

4.5.3.6 EN-DC FR1 fast SCell Activation of known SCell in non-DRX for 160ms SCell measurement cycle 248
4.5.3.7 EN-DC FR1 fast SCell Activation of known SCell in non-DRX for 640ms SCell measurement cycle 256
4.5.3.8 to 4.5.3.10 259
4.5.3.11 EN-DC FR1 TRS-based SCell Activation of SSB-less SCell in FR1 collocated inter-band in non-DRX 259
4.5.3.12 EN-DC FR1 Inter-band SSB-less SCell activation using A-TRS 268
4.5.4 UE UL carrier RRC reconfiguration delay 275
4.5.4.1 EN-DC FR1 UE UL carrier RRC reconfiguration delay 275
4.5.5 Link recovery procedures 282
4.5.5.0 Minimum conformance requirements 282
4.5.5.0.3 Scheduling availability of UE during beam failure detection and candidate beam detection 284
4.5.5.0.4 Requirements for Beam Failure Recovery in SCell 285
4.5.5.0.5 TRP specific Minimum conformance requirements 285
4.5.5.1 EN-DC FR1 SSB-based beam failure detection and link recovery in non-DRX 287
4.5.5.2 EN-DC FR1 SSB-based beam failure detection and link recovery in DRX 294
4.5.5.3 EN-DC FR1 CSI-RS-based beam failure detection and link recovery in non-DRX 301
4.5.5.4 EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX 307
4.5.5.5 EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX 314
4.5.5.6 EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in DRX 320
4.5.5.7 EN-DC FR1 PSCell TRP specific SSB-based beam failure detection and link recovery in non-DRX 326
4.5.5.8 EN-DC FR1 SCell TRP specific CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX 333
4.5.6 Active BWP switch delay 339
4.5.6.1 DCI-based and time-based active BWP switch 339
4.5.6.1.0 Minimum conformance requirements 339
4.5.6.1.1 EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC 342
4.5.6.1.2 EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC 349
4.5.6.2 RRC-based active BWP switch 359
4.5.6.2.0 Minimum conformance requirements 359
4.5.6.2.1 EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC 359
4.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs 365
4.5.6.3.0 Minimum conformance requirements 365
4.5.6.3.1 Simultaneous E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in EN-DC on multiple CCs 367
4.5.6.4 Simultaneous RRC-based active BWP switch on multiple CCs 376
4.5.6.4.0 Minimum conformance requirements 376
4.5.6.4.0.1 Minimum conformance requirements for simultaneous RRC-based BWP switch delay on multiple CCs 376
4.5.6.4.0.2 Minimum conformance requirements for DCI and timer-based BWP switch delay on a single CC 377
4.5.6.4.0.3 Minimum conformance requirements for interruption for NR victim cell 378
4.5.6.4.0.3.1 Interruptions due to SCell dormancy switch 379
4.5.6.4.0.3.2 Interruptions due to CQI measurements during SCell dormancy 379
4.5.6.4.0.3.3 Interruptions due to RRM measurements during SCell dormancy 379
4.5.6.4.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC on multiple CCs 380
4.5.6.5 SCell dormancy switch 387
4.5.7 PSCell addition and release delay 387
4.5.7.0 Minimum conformance requirements 388
4.5.7.0.1 NR PSCell Addition Delay Requirement 388
4.5.7.0.2 NR PSCell Release Delay Requirement 388
4.5.7.1 EN-DC FR1 addition and release delay of known PSCell 389
4.5.8 UL switching 394
4.5.8.0 Minimum conformance requirements 394
4.5.8.1 EN-DC FR1 interruptions at switching between two uplink carriers 394
4.5.9 UE specific CBW change 400
4.5.9.0 Minimum conformance requirements 400

4.5.9.0.1 Minimum conformance requirements for UE specific CBW change delay....400
4.5.9.1 UE specific CBW change on FR1 NR PSCell with non-DRX in synchronous EN-DC....400
4.5.10 PSCell activation and deactivation delay....404
4.5.10.0 Minimum conformance requirements....404
4.5.10.1 EN-DC FR1 PSCell activation and deactivation delay....405
4.5.11 PSCell addition and release delay....410
4.5.11.0 Minimum conformance requirements....410
4.5.11.0.1 Measurement time....411
4.5.11.1 EN-DC FR1 Addition and Release Delay of PSCell....411
4.6 Measurement procedures....416
4.6.1 Intra-frequency measurements....416
4.6.1.0 Minimum conformance requirements....416
4.6.1.0.1 Minimum conformance requirements for event-triggered reporting without gap....416
4.6.1.0.2 Minimum conformance requirements for event-triggered measurements with gap....421
4.6.1.1 EN-DC FR1 event-triggered reporting without gap in non-DRX....423
4.6.1.2 EN-DC FR1 event-triggered reporting without gap in DRX....427
4.6.1.3 EN-DC FR1 event-triggered reporting with gap in non-DRX....431
4.6.1.4 EN-DC FR1 event-triggered reporting with gap in DRX....436
4.6.1.5 EN-DC FR1 event-triggered reporting without gap in non-DRX with SSB time index detection....441
4.6.1.6 EN-DC FR1 event-triggered reporting with gap in non-DRX with SSB time index detection....445
4.6.1.7 EN-DC FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16....449
4.6.1.8 EN-DC FR1 event triggered reporting cell without SSB time index detection in DRX for UE configured with highSpeedMeasCA-Scell-r17....454
4.6.2 Inter-frequency measurements....459
4.6.2.0 Minimum conformance requirements for Inter-frequency measurements....459
4.6.2.1 EN-DC FR1-FR1 event-triggered reporting in non-DRX....462
4.6.2.2 EN-DC FR1-FR1 event-triggered reporting in DRX....467
4.6.2.3 Void....472
4.6.2.4 Void....472
4.6.2.5 EN-DC FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection....472
4.6.2.6 EN-DC FR1-FR1 event-triggered reporting in DRX with SSB time index detection....476
4.6.2.7 Void....481
4.6.2.8 Void....481
4.6.2.9 EN-DC FR1-FR1 event triggered reporting without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17....481
4.6.3 Void....486
4.6.4 L1-RSRP measurement for beam reporting....486
4.6.4.0 Minimum conformance requirements....486
4.6.4.0.1 Minimum conformance requirements for SSB-based L1-RSRP measurement for beam reporting....486
4.6.4.1 EN-DC FR1 SSB-based L1-RSRP measurement in non-DRX....490
4.6.4.1.5 Test requirement....493
4.6.4.2 EN-DC FR1 SSB-based L1-RSRP measurement in DRX....494
4.6.4.2.3 Minimum conformance requirements....494
4.6.4.3 EN-DC FR1 CSI-RS-based L1-RSRP measurement in non-DRX....497
4.6.4.4 EN-DC FR1 CSI-RS-based L1-RSRP measurement in DRX....502
4.6.4.5 EN-DC FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16....505
4.6.5 CLI measurements....509
4.6.5.0 Minimum conformance requirements....509
4.6.5.0.2 Minimum conformance requirements for CLI-RSSI measurement with non-DRX....510
4.6.5.1 EN-DC FR1 SRS-RSRP measurement with non-DRX....511
4.6.5.2 EN-DC FR1 CLI-RSSI measurement in non-DRX....516
4.6.6 Measurements with autonomous gaps....519
4.6.6.0 Minimum conformance requirements....519
4.6.6.0.1 Minimum conformance requirements for measurements with autonomous gaps....519
4.6.6.0.1.1 Minimum conformance requirements for E-UTRA FDD - NR measurements with autonomous gaps....519
4.6.6.0.1.2 Minimum conformance requirements for E-UTRA TDD - NR measurements with autonomous gaps....520

4.6.6.1 EN-DC intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC 520
4.6.7 L1-SINR measurement for beam reporting 524
4.6.7.0 Minimum conformance requirements 524
4.6.7.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in non-DRX 529
4.6.7.2 EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR measurement in DRX 534
4.6.7.3 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX 538
4.6.8 CSI-RS based intra-frequency measurement 543
4.6.8.0 Minimum conformance requirements 543
4.6.8.0.1 Minimum conformance requirements for EN-DC event triggered reporting tests without gap under DRX 543
4.6.9 CSI-RS based inter-frequency measurement 545
4.6.9.0 Minimum conformance requirements 545
4.6.9.0.1 Minimum conformance requirements for EN-DC event triggered reporting tests for FR1 cell when non-DRX is used 545
4.7 Measurement performance requirements 546
4.7.1 SS-RSRP 546
4.7.1.0 Minimum conformance requirements 546
4.7.1.1 Intra-frequency measurements 550
4.7.1.1.1 EN-DC FR1 SS-RSRP absolute measurement accuracy 551
4.7.1.1.2 EN-DC FR1 SS-RSRP relative measurement accuracy 556
4.7.1.2 Inter-frequency measurements 558
4.7.1.2.1 EN-DC FR1-FR1 SS-RSRP absolute measurement accuracy 558
4.7.1.2.2 EN-DC FR1-FR1 SS-RSRP relative measurement accuracy 564
4.7.2 SS-RSRQ 565
4.7.2.0 Minimum conformance requirements 565
4.7.2.1 EN-DC FR1 SS-RSRQ measurement accuracy 568
4.7.2.2 Inter-Frequency SS-RSRQ measurement accuracy 572
4.7.2.2.1 EN-DC FR1-FR1 SS-RSRQ absolute measurement accuracy 572
4.7.2.2.2 EN-DC FR1-FR1 SS-RSRQ relative measurement accuracy 576
4.7.3 SS-SINR 578
4.7.3.0 Minimum conformance requirements 578
4.7.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements 578
4.7.3.0.2 Inter-frequency absolute SS-SINR measurement accuracy requirements 579
4.7.3.0.3 Inter-frequency relative SS-SINR measurement accuracy requirements 579
4.7.3.1 EN-DC FR1 SS-SINR measurement accuracy 580
4.7.3.2 Inter-Frequency SS-SINR measurement accuracy 584
4.7.3.2.1 EN-DC FR1-FR1 SS-SINR absolute measurement accuracy 584
4.7.3.2.2 EN-DC FR1-FR1 SS-SINR relative measurement accuracy 588
4.7.4 L1-RSRP 590
4.7.4.0 Minimum conformance requirements 590
4.7.4.0.1 SSB based absolute L1-RSRP measurement accuracy requirements 590
4.7.4.0.3 CSI-RS based absolute L1-RSRP measurement accuracy requirements 593
4.7.4.0.4 CSI-RS based relative L1-RSRP measurement accuracy requirements 594
4.7.4.1 SSB based L1-RSRP measurements 594
4.7.4.1.1 EN-DC FR1 SSB-based L1-RSRP absolute measurement accuracy 594
4.7.4.1.2 EN-DC FR1 SSB-based L1-RSRP relative measurement accuracy 600
4.7.4.2 CSI-RS based L1-RSRP measurements 602
4.7.4.2.1 EN-DC FR1 CSI-RS-based L1-RSRP absolute measurement accuracy 602
4.7.4.2.2 EN-DC FR1 CSI-RS-based L1-RSRP relative measurement accuracy 605
4.7.5 SFTD 607
4.7.5.0 Minimum conformance requirements 607
4.7.5.0.1 SFTD Accuracy Requirement 607
4.7.5.1 EN-DC FR1 SFTD measurement accuracy 608
4.7.6 CLI measurements 612
4.7.6.0 Minimum conformance requirements 612
4.7.6.0.1 Minimum conformance requirements for SRS-RSRP accuracy 612
4.7.6.0.1.1 SRS-RSRP report mapping 613
4.7.6.0.2 Minimum conformance requirements for CLI-RSSI measurement accuracy with FR1 serving cell 614
4.7.6.1 EN-DC SRS-RSRP measurement accuracy with FR1 serving cell 615
4.7.6.2 EN-DC CLI-RSSI measurement accuracy with FR1 serving cell 622

4.7.7 L1-SINR measurement for beam reporting 625
4.7.7.0 Minimum conformance requirements 625
4.7.7.0.1 Minimum conformance requirements for CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off 625
4.7.7.0.2 Minimum conformance requirements for SSB based CMR and dedicated IMR 628
4.7.7.0.3 Minimum conformance requirements for CSI-RS based CMR and dedicated IMR 630
4.7.7.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement 633
4.7.7.1.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR absolute measurement accuracy 633
4.7.7.1.2 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR relative measurement accuracy 638
4.7.7.2 EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy 640
4.7.7.3 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement 645
4.7.7.3.1 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR absolute measurement accuracy 645
4.7.7.3.2 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR relative measurement accuracy 650
4.7.8 CSI-RSRP 652
4.7.8.0 Minimum conformance requirements 652
4.7.8.0.1 Intra-frequency absolute CSI-RSRP measurement accuracy 652
4.7.8.0.2 Intra-frequency relative CSI-RSRP measurement accuracy requirements 654
4.7.8.0.3 Inter-frequency absolute CSI-RSRP measurement accuracy requirements 656
4.7.8.0.4 Inter-frequency relative CSI-RSRP measurement accuracy requirements 657
4.7.8.1 Intra-frequency CSI-RSRP measurement accuracy 658
4.7.8.1.1 EN-DC FR1 CSI-RSRP absolute measurement accuracy 658
4.7.8.1.2 EN-DC FR1 CSI-RSRP relative measurement accuracy 664
4.7.8.2 Inter-frequency measurement accuracy 666
4.7.8.2.1 EN-DC FR1 CSI-RSRP absolute measurement accuracy 666
4.7.8.2.2 EN-DC FR1 CSI-RSRP relative measurement accuracy 672
4.7.9 CSI-RSRQ 673
4.7.9.0 Minimum conformance requirements 673
4.7.9.0.1 Intra-frequency CSI-RSRQ accuracy requirements 673
4.7.9.0.2 Inter-frequency CSI-RSRQ accuracy requirements 675
4.7.9.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 677
4.7.9.1.1 Test purpose 677
4.7.9.1.2 Test applicability 677
4.7.9.1.3 Minimum conformance requirements 677
4.7.9.1.4 Test description 677
4.7.9.1.5 Test Requirements 679
4.7.9.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 682
4.7.9.2.1 Test purpose 682
4.7.9.2.2 Test applicability 682
4.7.9.2.3 Minimum conformance requirements 682
4.7.9.2.4 Test description 682
4.7.9.2.5 Test Requirements 684
4.7.10 CSI-SINR 688
4.7.10.0 Minimum conformance requirements 688
4.7.10.0.1 Intra-frequency CSI-SINR accuracy requirements in FR1 688
4.7.10.0.1.1 Absolute CSI-SINR accuracy in FR1 688
4.7.10.0.2 Inter-frequency CSI-SINR accuracy requirements in FR1 689
4.7.10.0.2.1 Absolute accuracy of CSI-SINR in FR1 689
4.7.10.0.2.2 Relative accuracy of CSI-SINR in FR1 690
4.7.10.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 691
4.7.10.1.1 Test purpose 691
4.7.10.1.2 Test applicability 691
4.7.10.1.3 Minimum conformance requirements 691
4.7.10.1.4 Test description 692
4.7.10.1.5 Test Requirements 693
4.7.10.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 696
4.7.10.2.1 Test purpose 696
4.7.10.2.2 Test applicability 696

4.7.10.2.3 Minimum conformance requirements 696
4.7.10.2.4 Test description 696
4.7.10.2.5 Test Requirements 698
4.7.11 TDCP amplitude measurement accuracy 701
4.7.11.0 Minimum conformance requirements 701
4.7.11.0.1 TDCP amplitude measurement accuracy requirements in FR1 701
4.7.11.1 TDCP amplitude measurement accuracy in EN-DC 702
4.7.11.1.1 Test purpose 702
4.7.11.1.2 Test applicability 702
4.7.11.1.3 Minimum conformance requirements 702
4.7.11.1.4 Test description 702
4.7.11.1.5 Test Requirements 704

4A NE-DC with all NR cells in FR1 705
4A.0 General 705
4A.1 Signalling characteristics 705
4A.1.1 E-UTRAN PSCell addition 705
4A.1.1.0 Minimum conformance requirements 705
4A.1.1.0.1 E-UTRA PSCell Addition Delay Requirement 705
4A.1.1.0.2 E-UTRA PSCell Release Delay Requirement 706
4A.1.1.1 NE-DC FR1 addition and release delay of known PSCell 706
4A.1.2 Active BWP switch delay 711
4A.1.2.0 Minimum conformance requirements 711
4A.1.2.1 NE-DC FR1 DCI-based and timer-based DL active BWP switch in non-DRX in synchronous NE-DC 711
4A.2 Measurement performance requirements 715
4A.2.1 SFTD accuracy 715
4A.2.1.0 Minimum conformance requirements 715
4A.1.1.0.1 NE-DC SFTD accuracy Requirement 715
4A.2.1.1 NE-DC FR1 SFTD accuracy 717

5 EN-DC with at least one NR cell in FR2 722
5.0 General 722
5.1 Void 722
5.2 Void 722
5.3 RRC_CONNECTED state mobility 722
5.3.1 Void 722
5.3.2 RRC connection mobility control 722
5.3.2.1 Void 722
5.3.2.2 Random access 722
5.3.2.2.1 EN-DC FR2 contention based random access 722
5.3.2.2.2 EN-DC FR2 non-contention based random access 730
5.3.2.2.3 EN-DC FR2 2-step contention based random access 738
5.3.2.2.4 EN-DC FR2 2-step non-contention based random access 741
5.3.2.3 Void 744
5.4 Timing 744
5.4.1 UE transmit timing 744
5.4.1.0 Minimum Conformance Requirements 744
5.4.1.0.1 Minimum conformance requirements for UE transmit timing accuracy 744
5.4.1.1 EN-DC FR2 UE transmit timing accuracy 745
5.4.1.2 NR UE Transmit Timing Test with 2-TA for FR2 UE supporting multiDCI-IntraCellMultiTRP-TwoTA-r18 751
5.4.2 UE timer accuracy 758
5.4.3 Timing advance 758
5.4.3.0 Minimum conformance requirements 758
5.4.3.0.1 Minimum conformance requirements for timing advance adjustment accuracy 758
5.4.3.1 EN-DC FR2 timing advance adjustment accuracy 758
5.5 Signaling characteristics 763
5.5.1 Radio link monitoring 763
5.5.1.0 Minimum conformance requirements 764
5.5.1.0.1 Minimum conformance requirements for out-of-sync SSB-based RLM 764
5.5.1.0.2 Minimum conformance requirements for in-sync SSB-based RLM 764

5.5.1.0.3 Minimum conformance requirements for out-of-sync CSI-RS based RLM 766
5.5.1.0.4 Minimum conformance requirements for in-sync CSI-RS based RLM 768
5.5.1.0.5 Minimum conformance requirements for UE scheduling restrictions during radio link monitoring 771
5.5.1.0.6 Requirements for UE configured with Relaxed Measurement Criteria 772
5.5.1.1 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode 772
5.5.1.2 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode 778
5.5.1.3 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode 783
5.5.1.4 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode 788
5.5.1.5 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode 793
5.5.1.6 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode 798
5.5.1.7 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode 803
5.5.1.8 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode 809
5.5.1.9 EN-DC FR2 radio link monitoring UE scheduling restrictions 816
5.5.1.10 EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion 820
5.5.1.11 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx 825
5.5.2 Interruption 831
5.5.2.0 Minimum conformance requirements 831
5.5.2.0.1 Minimum conformance requirements for interruptions at transitions between active and non-active during DRX 831
5.5.2.0.2 Minimum conformance requirements for interruptions during measurements on deactivated NR SCC 831
5.5.2.0.3 Minimum conformance requirements for interruptions during measurements on deactivated E-UTRAN SCC 832
5.5.2.0.4 Minimum conformance requirements for interruptions at NR SRS carrier based switching 833
5.5.2.0.5 Minimum conformance requirements for interruptions at E-UTRA SRS carrier based switching 834
5.5.2.1 EN-DC FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC 835
5.5.2.2 EN-DC FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC 839
5.5.2.3 EN-DC FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC 843
5.5.2.4 EN-DC FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC 848
5.5.2.5 EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC 852
5.5.2.6 EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC 856
5.5.2.7 E-UTRAN - NR FR2 interruptions at E-UTRA SRS carrier based switching 860
5.5.2.8 E-UTRAN - NR FR2 interruptions at NR SRS carrier based switching 865
5.5.3 SCell activation and deactivation delay 870
5.5.3.1 EN-DC FR2 SCell activation and deactivation intra-band in non-DRX 881
5.5.3.2 to 5.5.3.5 889
5.5.3.6 Multiple SCell Activation and deactivation of one unknown SCell and one known SCell in FR2 889
5.5.3.7 EN-DC FR2 direct SCell activation at SCell addition of known SCell 896
5.5.3.8 EN-DC FR2 fast SCell Activation of SCell in FR2 intra-band 899
5.5.4 UE UL carrier RRC reconfiguration delay 907
5.5.5 Link recovery procedures 907
5.5.5.0 Minimum conformance requirements 907
5.5.5.0.1 Minimum conformance requirements for SSB-based BFD and link recovery procedures 907
5.5.5.0.2 Minimum conformance requirements for CSI-RS-based BFD and link recovery procedures 911
5.5.5.0.3 Scheduling availability of UE during beam failure detection and candidate beam detection 916

5.5.5.0.4 Requirements for Beam Failure Recovery in SCell....917
5.5.5.0.5 Requirements for SSB based beam failure detection for UE fulfilling relaxed measurement criteria....917
5.5.5.0.6 TRP specific Minimum conformance requirements....918
5.5.5.0.6.1 Requirements for TRP specific CSI-RS based beam failure detection....918
5.5.5.0.6.2 Requirements for CSI-RS based candidate beam detection....919
5.5.5.0.6.3 Requirements for TRP specific Beam Failure Recovery....920
5.5.5.0.6.4 Scheduling availability of UE during TRP specific beam failure detection....920
5.5.5.0.6.5 Scheduling availability of UE during TRP specific candidate beam detection....920
5.5.5.1 EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX....921
5.5.5.2 EN-DC FR2 SSB-based beam failure detection and link recovery in DRX....928
5.5.5.3 EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX....935
5.5.5.4 EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX....941
5.5.5.5 EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX....948
5.5.5.6 EN-DC FR2 CSI-RS-based BFD and LR for SCell in non-DRX....954
5.5.5.7 EN-DC FR2 SCell CSI-RS-based beam failure detection and link recovery in DRX....960
5.5.5.8 EN-DC FR2 CSI-RS-based PSCell TRP specific Beam Failure Detection and Link Recovery in DRX mode....966
5.5.5.9 EN-DC FR2 SSB-based beam failure detection and link recovery in DRX mode for UE fulfilling relaxed measurement criterion....972
5.5.6 Active BWP switch delay....978
5.5.6.1 DCI-based and time-based active BWP switch....978
5.5.6.1.0 Minimum conformance requirements....978
5.5.6.1.1 EN-DC FR2 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC....978
5.5.6.1.2 EN-DC FR2 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC....979
5.5.6.2 RRC-based active BWP switch....980
5.5.6.2.0 Minimum conformance requirements....980
5.5.6.2.1 EN-DC FR2 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC....980
5.5.6.3 Simultaneous DCI-based and timer-based active BWP switch on multiple CCs....987
5.5.6.3.0 Minimum conformance requirements....987
5.5.6.3.0.1 Minimum conformance requirements for simultaneous DCI-based and timer-based active BWP switch on multiple CCs....987
5.5.6.3.0.1.1 Minimum conformance requirements for simultaneous DCI-based active BWP switch on multiple CCs....987
5.5.6.3.0.1.2 Minimum conformance requirements for simultaneous timer-based active BWP switch on multiple CCs....988
5.5.6.3.1 E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs in synchronous EN-DC....989
5.5.6.4 SCell dormancy switch....992
5.5.6.4.0 Minimum conformance requirements....992
5.5.6.4.0.1 Minimum conformance requirements for interruptions due to SCell dormancy switch....992
5.5.6.4.0.2 Minimum conformance requirements for interruptions due to CQI measurements during SCell dormancy....993
5.5.6.4.0.3 Minimum conformance requirements for interruptions due to RRM measurements during SCell dormancy....993
5.5.6.4.0.4 Minimum conformance requirements for DCI and timer-based BWP switch delay on a single CC....993
5.5.6.4.0.5 Minimum conformance requirements for simultaneous DCI based BWP switch delay on multiple CCs....995
5.5.6.4.0.6 Minimum conformance requirements for interruptions due to NR SCell dormancy switch....996
5.5.6.4.0.7 Minimum conformance requirements for interruptions due to CSI and RRM measurements during SCell dormancy....996
5.5.6.4.1 E-UTRAN – NR FR2 PSCell SCell dormancy switch of single FR2 Scell inside active time....997
5.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs....1000
5.5.6.5.0 Minimum conformance requirements....1000
5.5.6.5.0.1 Minimum conformance requirements for E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs with non-DRX in synchronous EN-DC....1000
5.5.6.5.1 E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs with non-DRX in synchronous EN-DC....1001
5.5.7 PSCell addition and release delay....1008

5.5.7.0 Minimum conformance requirements 1008
5.5.7.1 Addition and Release Delay of NR PSCell 1008
5.5.8 Active TCI state switch delay 1012
5.5.8.0 Minimum conformance requirements 1012
5.5.8.0.1 Minimum conformance requirements for MAC-CE based active TCI state switch 1012
5.5.8.0.2 Minimum conformance requirements for RRC based active TCI state switch 1013
5.5.8.1 EN-DC FR2 MAC-CE based active TCI state switch 1014
5.5.8.2 EN-DC FR2 RRC based active TCI state switch 1018
5.5.9 Uplink spatial relation switch delay 1022
5.5.9.0 Minimum conformance requirements 1022
5.5.9.0.1 Minimum conformance requirements for MAC-CE based uplink spatial relation switch delay 1022
5.5.9.0.2 Minimum conformance requirements for RRC based uplink spatial relation switch delay 1023
5.5.9.1 MAC-CE based uplink spatial relation switch 1023
5.5.9.1.1 E-UTRAN - NR PSCell FR2 uplink spatial relation switch for a known spatial relation 1023
5.5.9.2 RRC based uplink spatial relation switch 1027
5.5.9.2.1 E-UTRAN - NR PSCell FR2 spatial relation switch associated with a known DL-RS 1027
5.5.10 UE specific CBW change 1030
5.5.10.0 Minimum conformance requirements 1030
5.5.10.0.1 Minimum conformance requirements for UE specific CBW change 1030
5.5.10.1 UE specific CBW change on FR2 NR PSCell 1030
5.5.11 Unified TCI state switch delay 1034
5.5.11.0 Minimum conformance requirements 1034
5.5.11.0.1 Minimum conformance requirements for MAC-CE based downlink TCI state switch delay for unified TCI 1034
5.5.11.0.2 Minimum conformance requirements for MAC-CE based uplink TCI state switch delay for unified TCI 1036
5.5.11.1 EN-DC FR2 MAC-CE based active joint TCI state switch 1038
5.5.11.2 EN-DC FR2 MAC-CE based active uplink TCI state switch 1044
5.5.11.3 EN-DC FR2 MAC-CE based active downlink TCI state switch 1049
5.5.12 PSCell activation and deactivation delay 1055
5.5.12.0 Minimum conformance requirements 1055
5.5.12.1 EN-DC FR2 PSCell activation and deactivation delay 1056
5.5.13 Conditional PSCell addition and release delay 1060
5.5.13.1 EN-DC FR2 Addition and Release Delay of NR PSCell 1060
5.6 Measurement procedures 1065
5.6.1 Intra-frequency measurements 1065
5.6.1.0 Minimum conformance requirements 1065
5.6.1.0.1 Minimum conformance requirements for event-triggered measurement without gap 1065
5.6.1.0.2 Minimum conformance requirements for event-triggered measurement with gap 1068
5.6.1.1 EN-DC FR2 event-triggered reporting without gap in non-DRX 1069
5.6.1.2 EN-DC FR2 event-triggered reporting without gap in DRX 1075
5.6.1.3 EN-DC FR2 event-triggered reporting with gap in non-DRX 1079
5.6.1.4 EN-DC FR2 event-triggered reporting with gap in DRX 1084
5.6.2 Inter-frequency measurements 1089
5.6.2.0 Minimum conformance requirements for Inter-frequency measurements 1089
5.6.2.1 EN-DC FR2-FR2 event-triggered reporting in non-DRX 1091
5.6.2.2 EN-DC FR2-FR2 event-triggered reporting in DRX 1096
5.6.2.3 EN-DC FR2-FR2 event-triggered reporting in non-DRX with SSB time index detection 1101
5.6.2.4 EN-DC FR2-FR2 event-triggered reporting in DRX with SSB time index detection 1105
5.6.2.5 EN-DC FR1-FR2 event-triggered reporting in non-DRX 1111
5.6.2.6 EN-DC FR1-FR2 event-triggered reporting in DRX 1116
5.6.2.7 EN-DC FR1-FR2 event-triggered reporting in non-DRX with SSB time index detection 1121
5.6.2.8 EN-DC FR1-FR2 event-triggered reporting in DRX with SSB time index detection 1127
5.6.3 L1-RSRP measurement for beam reporting 1132
5.6.3.0 Minimum conformance requirements 1132
5.6.3.0.1 Minimum conformance requirements for SSB-based L1-RSRP measurement for beam reporting 1132
5.6.3.0.2 Minimum conformance requirements for CSI-RS-based L1-RSRP measurement for beam reporting 1134
5.6.3.1 EN-DC FR2 SSB-based L1-RSRP measurement in non-DRX 1136
5.6.3.2 EN-DC FR2 SSB-based L1-RSRP measurement in DRX 1141
5.6.3.3 EN-DC FR2 CSI-RS-based L1-RSRP measurement in non-DRX 1144

5.6.3.4 EN-DC FR2 CSI-RS-based L1-RSRP measurement in DRX 1149
5.6.4 CLI measurements 1152
5.6.4.0 Minimum conformance requirements 1152
5.6.4.0.1 Minimum conformance requirements for SRS-RSRP measurement period 1152
5.6.4.1 EN-DC FR2 SRS-RSRP measurement in non-DRX 1153
5.6.4.2 EN-DC FR2 CLI-RSSI measurement in non-DRX 1157
5.6.5 Measurements with autonomous gaps 1160
5.6.5.0 Minimum conformance requirements 1160
5.6.5.0.1 Minimum conformance requirements for EN-DC inter-frequency CGI identification of NR neighbour cell in FR2 1160
5.6.5.0.1.1 Introduction 1160
5.6.5.0.1.2 CGI identification of an NR cell with autonomous gaps 1160
5.6.5.0.1.3 CGI reporting delay 1161
5.6.5.1 EN-DC inter-frequency CGI identification of NR neighbour cell in FR2 1161
5.6.6 L1-SINR measurement for beam reporting 1165
5.6.6.0 Minimum conformance requirements 1165
5.6.6.0.1 L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured 1165
5.6.6.0.2 L1-SINR reporting with SSB based CMR and dedicated IMR configured 1168
5.6.6.0.3 L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured 1170
5.6.6.1 EN-DC FR2 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX 1173
5.6.6.2 EN-DC FR2 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX 1177
5.6.6.3 EN-DC FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX 1182
5.6.7 CSI-RS based Intra-frequency Measurements 1186
5.6.7.0 Minimum conformance requirements 1186
5.6.7.0.1 Minimum conformance requirements for event-triggered measurement without gap 1186
5.6.7.1 EN-DC event triggered reporting test without gap under non-DRX 1189
5.6.8 CSI-RS based Inter-frequency Measurements 1194
5.6.8.0 Minimum conformance requirements for Inter-frequency measurements 1194
5.6.8.1 EN-DC event triggered reporting tests for NR FR2 cell when DRX is used 1196
5.7 Measurement performance requirements 1201
5.7.1 SS-RSRP 1201
5.7.1.0 Minimum conformance requirements 1201
5.7.1.0.1 Intra-frequency SS-RSRP measurement accuracy requirements 1201
5.7.1.0.2 Inter-frequency SS-RSRP measurement accuracy requirements 1202
5.7.1.1 EN-DC FR2 SS-RSRP measurement accuracy 1203
5.7.1.2 EN-DC FR2-FR2 SS-RSRP measurement accuracy 1212
5.7.1.3 EN-DC FR1-FR2 SS-RSRP measurement accuracy 1219
5.7.2 SS-RSRQ 1224
5.7.2.0 Minimum conformance requirements 1224
5.7.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements 1224
5.7.2.0.2 Inter-frequency SS-RSRQ measurement accuracy requirements 1224
5.7.2.1 EN-DC FR2 SS-RSRQ measurement accuracy 1226
5.7.2.2 EN-DC FR2-FR2 SS-RSRQ measurement accuracy 1229
5.7.3 SS-SINR 1234
5.7.3.0 Minimum conformance requirements 1234
5.7.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements 1234
5.7.3.0.2 Inter-frequency SS-SINR measurement accuracy requirements 1235
5.7.3.1 EN-DC FR2 SS-SINR measurement accuracy 1236
5.7.3.2 EN-DC FR2-FR2 SS-SINR measurement accuracy 1240
5.7.4 L1-RSRP 1246
5.7.4.0 Minimum conformance requirements 1246
5.7.4.0.1 SSB-based L1-RSRP absolute measurement accuracy requirements 1246
5.7.4.0.2 SSB-based L1-RSRP relative measurement accuracy requirements 1247
5.7.4.0.3 CSI-RS-based L1-RSRP absolute measurement accuracy requirements 1248
5.7.4.0.4 CSI-RS-based L1-RSRP relative measurement accuracy requirements 1248
5.7.4.1 EN-DC FR2 SSB based L1-RSRP measurement accuracy 1249
5.7.4.2 EN-DC FR2 CSI-RS based L1-RSRP measurement accuracy 1255
5.7.5 SRS-RSRP 1260
5.7.5.0 Minimum conformance requirements 1260
5.7.5.0.1 Minimum conformance requirements for SRS-RSRP measurement accuracy 1260
5.7.5.1 EN-DC FR2 SRS-RSRP measurement accuracy 1262
5.7.5.2 EN-DC FR2 CLI-RSSI measurement accuracy 1266

5.7.5.2.1 Test purpose 1266
5.7.5.2.2 Test applicability 1266
5.7.5.2.3 Minimum conformance requirements....1266
5.7.5.2.4 Test description 1266
5.7.5.2.5 Test requirement....1267
5.7.6 L1-SINR measurement for beam reporting 1270
5.7.6.0 Minimum conformance requirements 1270
5.7.6.0.1 L1-SINR accuracy requirements with CSI-RS based CMR and no dedicated IMR configured .1270
5.7.6.0.2 L1-SINR accuracy requirements with SSB based CMR and dedicated IMR configured....1271
5.7.6.0.3 L1-SINR accuracy requirements with CSI-RS based CMR and dedicated IMR configured 1273
5.7.6.1 EN-DC FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy....1276
5.7.6.2 EN-DC FR2 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy 1280
5.7.6.3 EN-DC FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy 1285
5.7.7 CSI-RSRP 1289
5.7.7.0 Minimum conformance requirements 1289
5.7.7.0.1 Intra-frequency CSI-RSRP measurement accuracy requirements 1289
5.7.7.0.2 Inter-frequency CSI-RSRP measurement accuracy requirements 1291
5.7.7.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 1293
5.7.7.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 1300
5.7.8 CSI-RSRQ 1307
5.7.8.0 Minimum conformance requirements 1307
5.7.8.0.1 Intra-frequency CSI-RSRQ accuracy requirements....1307
5.7.8.0.2 Inter-frequency CSI-RSRQ accuracy requirements....1308
5.7.8.1 EN-DC intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell 1310
5.7.8.1.1 Test purpose 1310
5.7.8.1.2 Test applicability 1310
5.7.8.1.3 Minimum conformance requirements....1311
5.7.8.1.4 Test description 1311
5.7.8.1.5 Test Requirements 1312
5.7.8.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell....1314
5.7.8.2.1 Test purpose 1314
5.7.8.2.2 Test applicability 1314
5.7.8.2.3 Minimum conformance requirements....1314
5.7.8.2.4 Test description 1314
5.7.8.2.5 Test Requirements 1316
5.7.9 CSI-SINR....1318
5.7.9.0 Minimum conformance requirements 1318
5.7.9.0.1 Intra-frequency CSI-SINR accuracy requirements....1318
5.7.9.0.1.1 Absolute CSI-SINR accuracy 1318
5.7.9.0.2 Inter-frequency CSI-SINR accuracy requirements....1319
5.7.9.0.2.1 Absolute CSI-SINR accuracy 1319
5.7.9.0.2.2 Relative CSI-SINR accuracy 1321
5.7.9.1 EN-DC intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell....1321
5.7.9.1.1 Test purpose 1322
5.7.9.1.2 Test applicability 1322
5.7.9.1.3 Minimum conformance requirements....1322
5.7.9.1.4 Test description 1322
5.7.9.1.5 Test Requirements 1323
5.7.9.2 EN-DC inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell....1325
5.7.9.2.1 Test purpose 1325
5.7.9.2.2 Test applicability 1325
5.7.9.2.3 Minimum conformance requirements....1325
5.7.9.2.4 Test description 1326
5.7.9.2.5 Test Requirements 1327

6 NR standalone in FR1 1330
6.0 General 1330
6.1 RRC_IDLE state mobility 1330
6.1.1 NR cell re-selection 1330
6.1.1.0 Minimum conformance requirements 1330
6.1.1.0.1 Minimum conformance requirements for intra-frequency cell re-selection 1330

6.1.1.0.2 Minimum conformance requirements for inter-frequency cell re-selection 1330
6.1.1.0.3 Minimum conformance requirements for intra-frequency cell re-selection for UE configured with highSpeedMeasFlag-r16 1333
6.1.1.0.4 Minimum conformance requirements for intra-frequency cell re-selection when UE configured with relaxed measurement criterion 1333
6.1.1.0.5 Minimum conformance requirements for inter-frequency cell re-selection when UE configured with relaxed measurement criterion 1335
6.1.1.1 NR SA FR1 cell re-selection 1337
6.1.1.1.5 Test requirement 1341
6.1.1.2 NR SA FR1-FR1 cell re-selection 1342
6.1.1.3 NR SA FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion 1347
6.1.1.4 NR SA FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion 1352
6.1.1.5 NR SA FR1-FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion 1357
6.1.1.6 NR SA FR1-FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion 1364
6.1.1.7 NR SA FR1 cell re-selection for UE configured with highSpeedMeasFlag-r16 1370
6.1.1.8 NR SA FR1-FR1 Cell reselection for UE configured with highSpeedMeasInterFreq-r17 1375
6.1.1.9 NR SA FR1 cell re-selection for UE operating on a cell with less than 5MHz BW 1379
6.1.2 NR – E-UTRA cell re-selection 1382
6.1.2.0 Minimum conformance requirements 1382
6.1.2.0.1 Minimum conformance requirements for NR – E-UTRA cell re-selection 1382
6.1.2.0.2 Minimum conformance requirement for inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion 1383
6.1.2.1 NR SA FR1 – E-UTRA cell re-selection to higher priority E-UTRA 1385
6.1.2.2 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA 1390
6.1.2.3 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRAN for UE fulfilling low mobility relaxed measurement criterion 1395
6.1.2.4 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRAN for UE fulfilling not-at-cell edge relaxed measurement criterion 1400
6.1.2.5 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA for UE configured with highSpeedMeasFlag-r16 1406
6.2 RRC_INACTIVE state mobility 1411
6.2.0 General 1411
6.2.0.1 Minimum conformance requirements for TA validation using CG-SDT 1412
6.2.1 NR SA FR1 TA Validation for CG-SDT 1412
6.3 RRC_CONNECTED state mobility 1418
6.3.1 Handover 1418
6.3.1.0 Minimum conformance requirements 1418
6.3.1.0.1 Minimum conformance requirements for NR – E-UTRAN handover 1418
6.3.1.0.2 Minimum conformance requirements for NR FR1 – NR FR1 handover 1419
6.3.1.0.3 Minimum conformance requirements for NR – UTRAN handover 1420
6.3.1.0.4 Minimum conformance requirements for NR FR1- NR FR1 DAPS handover 1420
6.3.1.1 NR SA FR1 handover with known target cell 1423
6.3.1.2 NR SA FR1 handover with unknown target cell 1426
6.3.1.3 NR SA FR1-FR1 handover with unknown target cell 1430
6.3.1.4 NR SA FR1 – E-UTRA handover with known target cell 1433
6.3.1.5 NR SA FR1 – E-UTRA handover with unknown target cell 1439
6.3.1.6 NR SA FR1 – UTRAN FDD handover with known target cell 1443
6.3.1.7 NR SA FR1 synchronous DAPS handover 1449
6.3.1.8 NR SA FR1 asynchronous DAPS handover 1455
6.3.1.9 NR SA FR1 Intra-band inter-frequency synchronous DAPS handover 1458
6.3.1.10 NR SA FR1 Intra-band inter-frequency asynchronous DAPS handover 1465
6.3.1.11 NR SA FR1 Inter-band inter-frequency synchronous DAPS handover 1471
6.3.1.12 NR SA FR1 Inter-band inter-frequency asynchronous DAPS handover 1479
6.3.1.13 to 6.3.1.17 1487
6.3.1.18 NR SA FR1 handover with unknown target cell operating with 12 PRB SSB bandwidth 1487
6.3.2 RRC connection mobility control 1489
6.3.2.1 RRC re-establishment 1489
6.3.2.1.0 Minimum conformance requirements 1489
6.3.2.1.1 NR SA FR1 RRC re-establishment 1491
6.3.2.1.2 NR SA FR1 - FR1 RRC re-establishment 1495
6.3.2.1.3 NR SA FR1 RRC re-establishment without serving cell timing 1499

6.3.2.2 Random access 1503
6.3.2.2.0 Minimum conformance requirements 1503
6.3.2.2.1 NR SA FR1 contention based random access 1505
6.3.2.2.2 NR SA FR1 non-contention based random access 1511
6.3.2.2.3 NR SA FR1 2-step contention based random access 1517
6.3.2.2.4 NR SA FR1 2-step non-contention based random access 1521
6.3.2.3 RRC connection release with redirection 1526
6.3.2.3.0 Minimum conformance requirements 1526
6.3.2.3.1 NR SA FR1 RRC connection release with redirection 1527
6.3.2.3.2 NR SA FR1 – E-UTRA RRC connection release with redirection 1531
6.3.2.4 LTM PDCCH-order Random Access 1535
6.3.2.4.0 Minimum conformance requirements 1535
6.3.2.4.1 NR SA FR1 PDCCH-order RACH on neighbour cell when RACH BW is within active UL BWP 1536
6.3.2.4.2 NR SA FR1 PDCCH-ordered RACH to an inter-frequency candidate cell for LTM 1542
6.3.2.4.3 NR SA FR1 PDCCH-order RACH on neighbour cell without L1-RSRP measurement when RACH BW is within active UL BWP 1548
6.3.3 Conditional handover 1554
6.3.3.0 Minimum conformance requirements 1554
6.3.3.0.1 Minimum conformance requirements for NR FR1 intra-frequency conditional handover 1554
6.3.3.0.2 Minimum conformance requirements for NR FR1 inter-frequency conditional handover 1557
6.3.3.0.3 Minimum conformance requirements for SA NR-DC FR1 Conditional handover including target MCG and target SCG 1560
6.3.3.0.4 Minimum conformance requirements for NR-DC SA FR1 Conditional handover including target MCG and candidate SCG 1562
6.3.3.1 NR SA FR1 conditional handover 1564
6.3.3.2 NR SA FR1-FR1 conditional handover 1570
6.3.3.3 NR SA FR1 conditional handover including target MCG and target SCG 1576
6.3.3.4 NR SA FR1 conditional handover including target MCG and candidate SCG 1582
6.3.3.5 1588
6.3.3.6 NR SA FR1 Intra-frequency NES triggering conditional handover 1588
6.3.3.7 NR SA FR1-FR1 Inter-frequency NES-based conditional handover 1594
6.3.4 LTM PCell Switch 1602
6.3.4.0 Minimum conformance requirements 1602
6.3.4.0.1 Minimum conformance requirements for LTM PCell Switch 1602
6.3.4.1 NR SA FR1 RACH-based Intra-frequency PCell switch from FR1 to FR1 1604
6.3.4.2 NR SA FR1 RACH-based Inter-frequency LTM PCell switch from FR1 to FR1 1610
6.3.4.3 NR SA FR1 RACH-less Intra-frequency PCell switch from FR1 to FR1 1617
6.3.4.4 NR SA FR1 RACH-less Intra-frequency PCell switch from FR1 to FR1 without L1-RSRP measurement 1624
6.3.5 LTM PSCell Switch 1631
6.3.5.0 Minimum conformance requirements 1631
6.3.5.0.1 Minimum conformance requirements for LTM PCell Switch 1631
6.3.5.1 NR SA FR1 RACH-based intra-frequency LTM PSCell switch 1631
6.4 Timing 1637
6.4.1 UE transmit timing 1637
6.4.1.0 Minimum conformance requirements 1637
6.4.1.1 NR SA FR1 UE transmit timing accuracy 1638
6.4.2 UE timer accuracy 1644
6.4.3 Timing advance 1644
6.4.3.0 Minimum conformance requirement 1644
6.4.3.0.1 Minimum conformance requirement for timing advance adjustment 1644
6.4.3.1 NR SA FR1 timing advance adjustment accuracy 1644
6.5 Signaling characteristics 1649
6.5.1 Radio link monitoring 1649
6.5.1.00 General 1649
6.5.1.0 Minimum conformance requirements 1650
6.5.1.0.1 Minimum conformance requirements for out-of-sync SSB-based RLM 1650
6.5.1.0.2 Minimum conformance requirements for in-sync SSB-based RLM 1652
6.5.1.0.3 Minimum conformance requirements for out-of-sync and in-sync CSI-RS based RLM 1653
6.5.1.0.4 Minimum requirement of SSB based radio link monitoring for UE fulfilling relaxed measurement criteria 1654

6.5.1.0.5 Minimum requirement of CSI-RS based radio link monitoring for UE fulfilling relaxed measurement criteria 1655
6.5.1.1 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode 1656
6.5.1.2 NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode 1661
6.5.1.3 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode 1666
6.5.1.4 NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in DRX mode 1671
6.5.1.5 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode 1676
6.5.1.6 NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode 1681
6.5.1.7 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode 1686
6.5.1.8 NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode 1690
6.5.1.9 SA FR1 radio link monitoring out-of-sync Test for PCell configured with CSI-RS-based RLM for UE fulfilling relaxed measurement criterion 1695
6.5.1.9.1 Test purpose 1695
6.5.1.9.2 Test applicability 1695
6.5.1.9.3 Minimum conformance requirements 1695
6.5.1.9.4 Test description 1695
6.5.1.9.5 Test requirement 1699
6.5.1.10 to 6.5.1.12 1700
6.5.1.13 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode for UE operating on a cell with less than 5MHz BW 1700
6.5.1.14 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE operating on a cell with less than 5MHz BW 1703
6.5.1.16 NR SA FR1 Radio Link Monitoring In-sync Test for PCell with 3MHz Channel Bandwidth configured with SSB-based RLM RS in DRX mode 1706
6.5.2 Interruption 1709
6.5.2.0 Minimum conformance requirements 1709
6.5.2.0.1 Minimum conformance requirements for interruptions during measurements on deactivated NR SCC 1709
6.5.2.0.2 Interruptions at NR SRS carrier based switching 1710
6.5.2.1 NR SA FR1 interruptions during measurements on deactivated NR SCC 1711
6.5.2.2 SA interruptions at NR SRS carrier based switching 1717
6.5.3 SCell activation and deactivation delay 1722
6.5.3.0 Minimum conformance requirements 1722
6.5.3.0.1 Minimum conformance requirements for SCell activation and deactivation delay 1722
6.5.3.0.2 Minimum conformance requirements for TRS based SCell activation 1722
6.5.3.1 NR SA FR1 SCell activation and deactivation of known SCell in non-DRX for 160ms SCell measurement cycle 1723
6.5.3.2 NR SA FR1 SCell activation and deactivation of known SCell in non-DRX for 640ms SCell measurement cycle 1733
6.5.3.3 NR SA FR1 SCell activation and deactivation of unknown SCell in non-DRX 1734
6.5.3.4 NR SA FR1 direct SCell activation at SCell addition of known SCell 1736
6.5.3.5 NR SA FR1 direct SCell activation at handover with known SCell 1744
6.5.3.6 to 6.5.3.9 1753
6.5.3.10 NR SA FR1 fast SCell Activation of known SCell in non-DRX for 160ms SCell measurement cycle 1753
6.5.3.11 NR SA FR1 fast SCell Activation of known SCell in non-DRX for 640ms SCell measurement cycle 1760
6.5.3.12 to 6.5.3.14 1763
6.5.3.15 NR SA FR1 TRS based SCell Activation of SSB-less SCell in inter-band CA in non-DRX 1763
6.5.3.16 NR SA FR1 Inter-band SSB-less SCell Activation based on A-TRS in non-DRX 1771
6.5.4 UE UL carrier RRC reconfiguration delay 1778
6.5.4.0 Minimum conformance requirements 1778
6.5.4.0.1 Minimum conformance requirements for UL carrier RRC reconfiguration delay 1778
6.5.4.1 NR SA FR1 UE UL carrier RRC reconfiguration delay 1778

6.5.5 Link recovery procedures 1785
6.5.5.0 Minimum conformance requirements 1785
6.5.5.0.1 Minimum conformance requirements for SSB-based BFD and link recovery procedures....1785
6.5.5.0.2 Minimum conformance requirements for CSI-RS-based BFD and link recovery procedures 1785
6.5.5.0.3 Scheduling availability of UE during beam failure detection and candidate beam detection....1787
6.5.5.0.4 Requirements for Beam Failure Recovery in SCell....1787
6.5.5.0.5 TRP specific Minimum conformance requirements....1787
6.5.5.0.5.1 Requirements for CSI-RS based beam failure detection....1787
6.5.5.0.5.2 Requirements for CSI-RS based candidate beam detection....1788
6.5.5.0.5.3 Requirements for TRP specific Beam Failure Recovery 1789
6.5.5.0.5.4 Scheduling availability of UE during TRP specific beam failure detection....1789
6.5.5.0.5.5 Scheduling availability of FR1 UE during TRP specific candidate beam detection....1789
6.5.5.1 NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX....1789
6.5.5.2 NR SA FR1 SSB-based beam failure detection and link recovery in DRX....1795
6.5.5.3 NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX 1802
6.5.5.4 NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX....1808
6.5.5.5 NR SA FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX 1814
6.5.5.6 NR SA FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in DRX 1821
6.5.5.7 NR SA FR1 PCell TRP Specific CSI-RS-based Beam Failure Detection and Link Recovery in DRX 1827
6.5.6 Active BWP switch delay 1834
6.5.6.1 DCI-based and time-based active BWP switch....1834
6.5.6.1.0 Minimum conformance requirements....1834
6.5.6.1.1 NR SA FR1-FR1 DCI-based DL active BWP switch in non-DRX....1836
6.5.6.1.2 NR SA FR1 DCI-based DL active BWP switch in non-DRX....1844
6.5.6.2 RRC-based active BWP switch....1851
6.5.6.2.0 Minimum conformance requirements....1851
6.5.6.2.1 NR SA FR1 RRC-based DL active BWP switch in non-DRX....1851
6.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs....1857
6.5.6.3.0 Minimum conformance requirements....1857
6.5.6.3.1 NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA 1857
6.5.6.4 1867
6.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs 1867
6.5.6.5.0 Minimum conformance requirements....1867
6.5.6.5.1 NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA 1867
6.5.7 DL interruptions at switching between two uplink carriers 1874
6.5.7.0 Minimum conformance requirements 1874
6.5.7.1 NR SA FR1 DL Interruptions at switching between two uplink carriers in FDD-TDD CA 1875
6.5.7.2 NR SA FR1 DL Interruptions at switching between two uplink carriers in TDD-TDD CA....1879
6.5.7A NR SA FR1 DL interruptions at switching between two uplink carriers with two transmit antenna connectors....1883
6.5.7A.0 Minimum conformance requirements 1883
6.5.7A.1 NR SA FR1 DL interruptions at switching between two uplink carriers in FDD-TDD CA....1884
6.5.7A.2 NR SA FR1 DL interruptions at switching between two uplink carriers in TDD-TDD CA....1888
6.5.7B DL interruptions at switching between one uplink band with one transmit antenna connector and one uplink band with two transmit antenna connectors....1893
6.5.7B.0 Minimum conformance requirements 1893
6.5.7B.1 NR SA FR1 DL Interruptions at switching between two uplink bands in FDD-TDD CA 1893
6.5.7B.2 NR SA FR1 DL Interruptions at switching between two uplink bands in TDD-TDD CA 1898
6.5.7C DL interruptions at switching between two uplink bands with two transmit antenna connectors 1902
6.5.7C.0 Minimum conformance requirements 1902
6.5.7C.1 NR SA FR1 DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA 1903
6.5.7C.1.1 Test purpose 1903
6.5.7C.1.2 Test applicability 1903
6.5.7C.1.3 Minimum conformance requirements....1903
6.5.7C.1.4 Test description 1903
6.5.7C.1.4.1 Initial conditions....1903
6.5.7C.1.5 Test requirements 1906
6.5.7C.2 NR SA FR1 DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA 1908

6.5.7C.2.1 Test purpose 1908
6.5.7C.2.2 Test applicability 1908
6.5.7C.2.3 Minimum conformance requirements....1908
6.5.7C.2.4 Test description 1908
6.5.7C.2.4.1 Initial conditions....1908
6.5.7D DL interruptions at UE switching across three or four uplink bands....1913
6.5.7D.0 Minimum conformance requirements 1913
6.5.7D.1 NR SA FR1 DL interruptions at switching across three uplink bands in TDD-TDD CA for single TAG 1914
6.5.7D.2 NR SA FR1 DL interruptions at switching across four uplink bands in FDD-TDD CA for single TAG 1918
6.5.7D.3 NR SA FR1 DL interruptions at switching across three uplink bands in FDD-TDD CA for two TAGs....1925
6.5.7D.4 NR SA FR1 DL interruptions at switching across four uplink bands in TDD-TDD CA for two TAGs....1929
The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.6.5.8.. UE specific CBW change 1934
6.5.8.0 Minimum conformance requirements 1934
6.5.8.0.1 Minimum conformance requirements for UE specific CBW change 1934
6.5.8.1 UE specific CBW change on PCell in FR1 in non-DRX 1934
6.6 Measurement procedures....1940
6.6.1 Intra-frequency measurements....1940
6.6.1.0 Minimum conformance requirements 1940
6.6.1.0.1 Minimum conformance requirements for event-triggered measurement without gap....1940
6.6.1.0.2 Minimum conformance requirements for event-triggered measurement with gap....1940
6.6.1.0.3 Void....1941
6.6.1.0.4 Minimum conformance requirements for event-triggered measurement with gap with SSB index reading 1941
6.6.1.0.5 Void....1943
6.6.1.0.6 Minimum conformance requirements for event-triggered measurement with MUSIM gap configured....1943
6.6.1.1 NR SA FR1 event-triggered reporting without gap in non-DRX....1945
6.6.1.2 NR SA FR1 event-triggered reporting without gap in DRX....1949
6.6.1.3 NR SA FR1 event-triggered reporting with gap in non-DRX....1953
6.6.1.4 NR SA FR1 event-triggered reporting with gap in DRX 1958
6.6.1.5 NR SA FR1 event-triggered reporting without gap in non-DRX with SSB index reading....1963
6.6.1.6 NR SA FR1 event-triggered reporting with gap in non-DRX with SSB index reading....1966
6.6.1.7 NR SA FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16 1971
6.6.1.8 NR SA FR1 event triggered reporting without gap in DRX for UE configured with highSpeedMeasCA-Scell-r17....1975
6.6.1.9 NR SA FR1 event triggered reporting with MUSIM gap configured 1979
6.6.1.10 to 6.6.1.12....1984
6.6.1.12 NR SA FR1 event triggered reporting with SSB index detection without measurement gap in non-DRX mode for UE operating with 12 PRB SSB bandwidth....1984
6.6.1.13 NR SA FR1 event-triggered reporting tests without gap under Cell DTX....1986
6.6.2 Inter-frequency measurements....1991
6.6.2.0 Minimum conformance requirements for Inter-frequency measurements 1991
6.6.2.1 NR SA FR1-FR1 event-triggered reporting in non-DRX 1994
6.6.2.2 NR SA FR1-FR1 event-triggered reporting in DRX....1999
6.6.2.3 Void....2003
6.6.2.4 Void....2003
6.6.2.5 NR SA FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection....2003
6.6.2.6 NR SA FR1-FR1 event-triggered reporting in DRX with SSB time index detection 2008
6.6.2.7 Void....2012
6.6.2.8 Void....2012
6.6.2.9 SA event triggered reporting tests with additional mandatory gap pattern 2012
6.6.2.10 SA event triggered reporting tests for FR1 when DRX is used....2016
6.6.2.11 SA event triggered reporting tests for FR1 without gap when DRX is not used....2021
6.6.2.12 NR SA FR1-FR1 event triggered reporting tests without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17 2025
6.6.2.13 NR SA FR1-FR1 event triggered reporting using MUSIM gap with lower and higher priority....2030

6.6.2.14 NR SA FR1-FR1 event triggered reporting using MUSIM gap with shorter MGRP 2036
6.6.2.15 NR SA FR1 event triggered reporting without SSB index detection in DRX mode for UE operating on a cell with less than 5MHz BW....2042
6.6.3 2044
6.6.3.0 Minimum conformance requirements 2044
6.6.3.0.1 Minimum conformance requirements for inter-RAT event triggered reporting to E-UTRAN FDD....2044
6.6.3.0.2 Minimum conformance requirements for inter-RAT event triggered reporting to E-UTRAN TDD....2046
6.6.3.1 NR SA FR1 – E-UTRAN event-triggered reporting in non-DRX 2049
6.6.3.2 NR SA FR1 – E-UTRAN event-triggered reporting in DRX 2054
6.6.3.3 NR SA FR1 – E-UTRAN event-triggered reporting in DRX for UE configured with highSpeedMeasFlag-r16 2060
6.6.4 L1-RSRP measurement for beam reporting....2065
6.6.4.0 Minimum conformance requirements 2065
6.6.4.0.1 Minimum conformance requirements for SSB-based L1-RSRP measurement for beam reporting 2065
6.6.4.0.2 Minimum conformance requirements for CSI-RS-based L1-RSRP measurement for beam reporting 2065
6.6.4.0.3 Inter-cell SSB based L1-RSRP Reporting....2065
6.6.4.1 NR SA FR1 SSB-based L1-RSRP measurement in non-DRX 2066
6.6.4.2 NR SA FR1 SSB-based L1-RSRP measurement in DRX....2070
6.6.4.3 NR SA FR1 CSI-RS-based L1-RSRP measurement in non-DRX 2073
6.6.4.4 NR SA FR1 CSI-RS-based L1-RSRP measurement in DRX 2078
6.6.4.5 NR SA FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16 2081
6.6.4.6 NR SA FR1 Inter-cell SSB based L1-RSRP measurements on PCell in DRX 2085
6.6.5 UTRAN inter-RAT measurement....2089
6.6.5.1 NR SA FR1 – UTRAN event-triggered reporting in non-DRX....2089
6.6.6 CLI Measurements....2095
6.6.6.0 Minimum conformance requirements 2095
6.6.6.0.1 Minimum conformance requirements for SRS-RSRP measurement....2095
6.6.6.0.2 Minimum conformance requirements for CLI-RSSI measurement with non-DRX 2095
6.6.6.1 NR SA FR1 SRS-RSRP measurement in non-DRX 2095
6.6.7 NR measurements with autonomous gaps 2100
6.6.7.0 Minimum conformance requirements 2100
6.6.7.0.1 Minimum conformance requirements for SA intra-frequency CGI identification of NR neighbour cell in FR1 2100
6.6.7.0.1.1 Introduction....2100
6.6.7.0.1.2 CGI identification of an NR cell with autonomous gaps 2100
6.6.7.0.1.3 CGI reporting delay 2101
6.6.7.0.2 Minimum conformance requirements for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA 2102
6.6.7.0.2.1 CGI identification of an E-UTRA cell with autonomous gaps 2102
6.6.7.0.2.2 CGI reporting delay 2102
6.6.7.1 SA intra-frequency CGI identification of NR neighbour cell in FR1....2102
6.6.7.2 Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA....2106
6.6.8 L1-SINR measurement for beam reporting 2110
6.6.8.0 Minimum conformance requirements 2110
6.6.8.0.1 L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured....2110
6.6.8.0.2 L1-SINR reporting with SSB based CMR and dedicated IMR configured 2110
6.6.8.0.3 L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured....2110
6.6.8.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX 2110
6.6.8.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX 2115
6.6.8.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX....2120
6.6.9 Idle Mode CA/DC Measurements 2124
6.6.9.0 Minimum conformance requirements 2124
6.6.9.1 NR SA FR1 Idle mode CA/DC measurement for FR1 2126
6.6.10 to 6.6.14....2133
6.6.15 Idle Mode inter-RAT CA/DC Measurements....2133
6.6.15.0 Minimum conformance requirements 2133
6.6.15.1 NR SA FR1 Idle Mode measurements of inter-RAT CA candidate cells for early reporting 2134

6.6.16 2143
6.6.17 NR SA FR1 event triggered reporting tests with Pre-MG 2143
6.6.17.1 NR SA FR1 event triggered reporting tests with autonomous activation/deactivation Pre-MG 2145
6.6.17.2 NR SA FR1 event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation 2150
6.6.18 SA event triggered reporting tests with concurrent gaps 2156
6.6.18.0 Minimum conformance requirements 2156
6.6.18.0.1 Minimum conformance requirements for Intra-frequency measurement 2156
6.6.18.0.2 Minimum conformance requirements for Inter-frequency measurement 2157
6.6.18.0.3 Minimum conformance requirements for Inter-RAT measurement 2157
6.6.18.0.4 Minimum conformance requirements for PRS measurement 2158
6.6.18.1 NR SA FR1 event-triggered reporting for concurrent gaps non-overlap with SSB-based measurements in both inter-frequency layers 2158
6.6.18.2 NR SA FR1 event-triggered reporting for concurrent gaps partially-overlap with SSB-based measurements in both inter-frequency layers 2164
6.6.18.3 NR SA FR1 NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1 2170
6.6.18.4 NR SA FR1 event triggered reporting tests for PRS and SSB measurement in FR1 without SSB time index detection when DRX is not used 2178
6.6.19 SA event triggered reporting tests with NCSG 2184
6.6.19.0 Minimum conformance requirements 2184
6.6.19.0.1 Minimum conformance requirements for intra-frequency measurement 2184
6.6.19.0.2 Minimum conformance requirements for inter-frequency measurement 2186
6.6.19.0.3 Minimum conformance requirements for inter-RAT measurement 2187
6.6.19.0.4 Minimum conformance requirements for interruptions 2188
6.6.19.1 NR SA FR1 event-triggered reporting tests with NCSG under non-DRX in FR1 2188
6.6.19.2 NR SA FR1 event-triggered reporting tests for FR1 with NCSG for inter-frequency measurement 2193
6.6.19.3 NR SA FR1 NR - E-UTRAN event-triggered reporting in non-DRX in FR1 with NCSG 2198
6.6.19.4 NR SA FR1 Event triggered reporting on SCC with deactivated SCell test with per-UE NCSG under non-DRX 2204
6.6.20 UE Rx-Tx time difference measurement for propagation delay compensation 2209
6.6.20.0 Minimum conformance requirements 2209
6.6.20.1 NR SA FR1 UE Rx-Tx time difference measurement with PRS for RTT-based PDC 2212
6.6.21 UE Rx-Tx time difference measurement for propagation delay compensation with TRS 2216
6.6.21.0 Minimum conformance requirements 2216
6.6.21.1 NR SA FR1 UE Rx-Tx time difference measurement with TRS for RTT-based PDC 2218
6.6.22 2222
6.6.23 2222
6.6.24 SA event triggered reporting tests with NeedForGap 2222
6.6.24.0 Minimum conformance requirements 2222
6.6.24.0.1 Minimum conformance requirements for intra-frequency event-triggered measurement without gap 2222
6.6.24.0.2 Minimum conformance requirements for inter-frequency event-triggered measurement without gap 2225
6.6.24.0.3 Minimum conformance requirements for measurements without gap carried out by UE supporting NeedForInterruptionInfoNR 2227
6.6.24.1 NR SA FR1 event-triggered reporting without gap with interruptions 2228
6.6.24.2 NR SA FR1-FR1 event-triggered reporting without gap with interruption with SSB index 2234
6.6.24.3 NR SA FR1-FR1 event-triggered reporting without gap with interruption 2240
6.6.24.4 NR SA FR1-FR1 event-triggered reporting without gap without interruption 2246
6.6.24.5 NR SA FR1 event-triggered reporting without gap without interruption 2252
6.6.25 SA NR - E-UTRAN event-triggered without measurement gaps 2258
6.6.25.0 Minimum conformance requirements 2258
6.6.25.0.1 Minimum conformance requirements for NR – E-UTRAN FDD measurements when no DRX is used 2258
6.6.25.0.2 Minimum conformance requirements for NR – E-UTRAN TDD measurements when no DRX is used 2259
6.6.25.1 NR SA FR1 - E-UTRAN event-triggered reporting without gap without interruption 2260
6.6.26 LTM Intra-frequency L1-RSRP measurement 2265
6.6.26.0 Minimum conformance requirements 2265
6.6.26.0.1 Minimum conformance requirements for SSB-based intra-frequency L1-RSRP measurement 2265
6.6.26.1 NR SA FR1 Intra-frequency SSB based L1-RSRP measurement 2266
6.6.27 LTM Inter-frequency L1-RSRP measurement with measurement gap 2272
6.6.27.0 Minimum conformance requirements 2272

6.6.27.0.1 Minimum conformance requirements for SSB-based inter-frequency L1-RSRP measurement with gap 2272
6.6.27.1 NR SA FR1 Inter-frequency SSB based L1-RSRP measurement with measurement gap 2272
6.6.28 LTM Inter-frequency L1-RSRP measurement without measurement gap 2278
6.6.28.0 Minimum conformance requirements 2278
6.6.28.0.1 Minimum conformance requirements for SSB-based inter-frequency L1-RSRP measurement without gap 2278
6.6.28.1 NR SA FR1 Inter-frequency SSB based L1-RSRP measurement without measurement gap 2279
6.7 Measurement performance requirements 2285
6.7.1 SS-RSRP 2285
6.7.1.0 Minimum conformance requirements 2285
6.7.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements 2285
6.7.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements 2285
6.7.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements 2285
6.7.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements 2285
6.7.1.1 Intra-frequency measurements 2285
6.7.1.1.1 NR SA FR1 SS-RSRP absolute measurement accuracy 2285
6.7.1.1.2 NR SA FR1 SS-RSRP relative measurement accuracy 2291
6.7.1.2 Inter-frequency measurements 2293
6.7.1.2.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy 2293
6.7.1.2.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy 2298
6.7.2 SS-RSRQ 2299
6.7.2.0 Minimum conformance requirements 2299
6.7.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements 2299
6.7.2.0.2 Inter-frequency SS-RSRQ absolute measurement accuracy requirements 2299
6.7.2.0.3 Inter-frequency SS-RSRQ relative measurement accuracy requirements 2300
6.7.2.1 NR SA FR1 SS-RSRQ measurement accuracy 2300
6.7.2.2 Inter-Frequency SS-RSRQ measurement accuracy 2304
6.7.2.2.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy 2304
6.7.2.2.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy 2308
6.7.3 SS-SINR 2309
6.7.3.0 Minimum conformance requirements 2309
6.7.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements 2309
6.7.3.0.2 Inter-frequency absolute SS-SINR measurement accuracy requirements 2309
6.7.3.0.3 Inter-frequency relative SS-SINR measurement accuracy requirements 2309
6.7.3.1 NR SA FR1 SS-SINR measurement accuracy 2310
6.7.3.2 Inter-Frequency SS-SINR measurement accuracy 2313
6.7.3.2.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy 2313
6.7.3.2.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy 2317
6.7.4 L1-RSRP 2319
6.7.4.0 Minimum conformance requirements 2319
6.7.4.0.1 SSB based absolute L1-RSRP measurement accuracy requirements 2319
6.7.4.0.2 SSB based relative L1-RSRP measurement accuracy requirements 2319
6.7.4.0.3 CSI-RS based absolute L1-RSRP measurement accuracy requirements 2319
6.7.4.0.4 CSI-RS based relative L1-RSRP measurement accuracy requirements 2319
6.7.4.1 SSB based L1-RSRP measurements 2319
6.7.4.1.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy 2319
6.7.4.1.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy 2324
6.7.4.2 CSI-RS based L1-RSRP measurements 2326
6.7.4.2.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy 2326
6.7.4.2.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy 2329
6.7.5 E-UTRAN RSRP 2331
6.7.5.0 Minimum conformance requirements 2331
6.7.5.0.1 E-UTRAN RSRP absolute accuracy 2331
6.7.5.1 NR SA FR1 – E-UTRAN RSRP absolute measurement accuracy 2332
6.7.6 E-UTRAN RSRQ 2338
6.7.6.0 Minimum conformance requirements 2338
6.7.6.0.1 E-UTRAN RSRQ absolute accuracy 2338
6.7.6.1 NR SA FR1 – E-UTRAN RSRQ absolute measurement accuracy 2339
6.7.7 E-UTRAN RS-SINR 2344
6.7.7.0 Minimum conformance requirements 2344
6.7.7.0.1 E-UTRAN RS-SINR absolute accuracy 2344

6.7.7.1 NR SA FR1 – E-UTRAN RS-SINR absolute measurement accuracy 2345
6.7.8 CLI Measurements 2350
6.7.8.0 Minimum conformance requirements 2350
6.7.8.0.1 Minimum conformance requirements for SRS-RSRP accuracy 2350
6.7.8.0.2 Minimum conformance requirements for CLI-RSSI measurement accuracy with FR1 serving cell 2351
6.7.8.1 NR SA FR1 SRS-RSRP measurement accuracy 2351
6.7.8.1.1 Test purpose 2351
6.7.8.1.2 Test applicability 2351
6.7.8.1.3 Minimum conformance requirements 2351
6.7.8.1.4 Test description 2351
6.7.8.1.5 Test requirement 2353
6.7.9 L1-SINR measurement for beam reporting 2357
6.7.9.0 Minimum conformance requirements 2357
6.7.9.0.1 Minimum conformance requirements for CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off 2357
6.7.9.0.2 Minimum conformance requirements for SSB based CMR and dedicated IMR 2360
6.7.9.0.3 Minimum conformance requirements for CSI-RS based CMR and dedicated IMR 2362
6.7.9.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement 2365
6.7.9.1.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR absolute measurement accuracy 2365
6.7.9.1.2 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR relative measurement accuracy 2369
6.7.9.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy 2370
6.7.9.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy 2374
6.7.9.3.1 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR absolute measurement accuracy 2374
6.7.9.3.2 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR relative measurement accuracy 2378
6.7.10 CSI-RSRP 2379
6.7.10.0 Minimum conformance requirements 2379
6.7.10.1 Intra-frequency measurements 2379
6.7.10.1.1 NR SA FR1 CSI-RSRP absolute measurement accuracy 2379
6.7.10.1.2 NR SA FR1 CSI-RSRP relative measurement accuracy 2384
6.7.10.2 Inter-frequency measurements 2388
6.7.10.2.1 NR SA FR1-FR1 CSI-RSRP absolute measurement accuracy 2388
6.7.10.2.2 NR SA FR1-FR1 CSI-RSRP relative measurement accuracy 2393
6.7.11 CSI-RSRQ 2397
6.7.11.0 Minimum conformance requirements 2397
6.7.11.0.1 Intra-frequency CSI-RSRQ accuracy requirements 2397
6.7.11.0.1.1 Absolute CSI-RSRQ accuracy 2397
6.7.11.0.2 Inter-frequency CSI-RSRQ accuracy requirements 2399
6.7.11.0.2.1 Absolute CSI-RSRQ accuracy 2399
6.7.11.0.2.2 Relative CSI-RSRQ accuracy 2400
6.7.11.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 2401
6.7.11.2 SA inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 2406
6.7.12 CSI-SINR 2412
6.7.12.0 Minimum conformance requirements 2412
6.7.12.0.1 Intra-frequency CSI-SINR accuracy requirements 2412
6.7.12.0.1.1 Absolute CSI-SINR accuracy 2412
6.7.12.0.2 Inter-frequency CSI-SINR accuracy requirements 2413
6.7.12.0.2.1 Absolute CSI-SINR accuracy 2413
6.7.12.0.2.2 Relative CSI-SINR accuracy 2415
6.7.12.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell 2416
6.7.12.2 SA inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell 2420
6.7.13 to 6.7.16 2426
6.7.17 LTM L1-RSRP measurement 2426
6.7.17.0 Minimum conformance requirements 2426
6.7.17.0.1 SSB based absolute L1-RSRP measurement accuracy requirements 2426
6.7.17.0.2 SSB based relative L1-RSRP measurement accuracy requirements 2427
6.7.17.1 Inter-frequency L1-RSRP accuracy requirements for neighbour cell in FR1 2428

6.7.17.1.1 NR SA FR1 Inter-frequency L1-RSRP absolute accuracy requirements for neighbour cell 2428
6.7.17.1.2 Void 2436
6.7.18 TDCP amplitude measurement accuracy 2436
6.7.18.0 Minimum conformance requirements 2436
6.7.18.0.1 TDCP amplitude measurement accuracy requirements in FR1 2436
6.7.18.1 TDCP amplitude measurement accuracy in EN-DC 2437
6.7.18.1.1 Test purpose 2437
6.7.18.1.2 Test applicability 2437
6.7.18.1.3 Minimum conformance requirements 2437
6.7.18.1.4 Test description 2437
6.7.18.1.5 Test Requirements 2439

7 NR standalone with at least one NR cell in FR2 2441
7.0 General 2441
7.1 RRC_IDLE state mobility 2441
7.1.1 NR cell re-selection 2441
7.1.1.0 Minimum conformance requirements 2441
7.1.1.0.1 Minimum conformance requirements for intra-frequency cell re-selection 2441
7.1.1.0.2 Minimum conformance requirements for inter-frequency cell re-selection 2444
7.1.1.0.3 Minimum conformance requirements for intra-frequency cell re-selection for UE configured with relaxed measurement criterion 2447
7.1.1.0.4 Minimum conformance requirements for inter-frequency cell re-selection for UE configured with relaxed measurement criterion 2448
7.1.1.1 NR SA FR2 cell re-selection 2449
7.1.1.2 NR SA FR2-FR2 cell re-selection 2454
7.1.1.3 NR SA FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion 2460
7.1.1.4 NR SA FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion 2465
7.1.1.5 NR SA FR2-FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion 2469
7.1.1.6 NR SA FR2-FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion 2475
7.2 RRC_INACTIVE state mobility 2492
7.2.1 Small Data Transmission 2492
7.2.1.0 Minimum conformance requirements 2492
7.2.1.0.1 Minimum conformance requirements for CG-SDT TA validation 2492
7.2.1.1 TA Validation for CG-SDT in FR2 2493
7.3 RRC_CONNECTED state mobility 2501
7.3.1 Handover 2501
7.3.1.0 Minimum conformance requirements 2501
7.3.1.0.1 Minimum conformance requirements for NR FR2 – NR FR2 handover 2501
7.3.1.0.2 Minimum conformance requirements for NR FR1 – NR FR2 handover 2502
7.3.1.0.3 Minimum conformance requirements for NR FR1 – NR FR2 DAPS handover 2503
7.3.1.1 NR SA FR1-FR2 Inter-frequency handover; unknown target cell 2504
7.3.1.2 NR SA FR2 Intra-frequency handover; unknown target cell 2507
7.3.1.3 NR SA FR2-FR2 Inter-frequency handover; unknown target cell 2511
7.3.1.4 NR SA FR1-FR2 synchronous DAPS handover 2514
7.3.1.5 NR SA FR1-FR2 asynchronous DAPS handover 2522
7.3.2 RRC connection mobility control 2526
7.3.2.1 RRC re-establishment 2526
7.3.2.1.0 Minimum conformance requirements 2526
7.3.2.1.1 NR SA FR2 RRC re-establishment 2527
7.3.2.1.2 NR SA FR2 - FR2 RRC re-establishment 2531
7.3.2.1.3 NR SA FR2 RRC re-establishment without serving cell timing 2534
7.3.2.2 Random access 2538
7.3.2.2.0 Minimum conformance requirements 2538
7.3.2.2.2 NR SA FR2 non-contention based random access 2547
7.3.2.2.3 NR SA FR2 2-step contention based random access 2554
7.3.2.2.4 NR SA FR2 2-step non-contention based random access 2559
7.3.2.3 RRC connection release with redirection 2566
7.3.2.3.0 Minimum conformance requirements 2566
7.3.2.3.1 NR SA FR2-FR2 RRC connection release with redirection 2567
7.3.3 Conditional handover 2570
7.3.3.0 Minimum conformance requirements 2570

7.3.3.0.1 Minimum conformance requirements for NR FR2 intra-frequency conditional handover....2570
7.3.3.0.2 Minimum conformance requirements for NR FR2 inter-frequency conditional handover....2572
7.3.3.0.3 Minimum conformance requirements for NR FR2 – NR FR1 inter-frequency conditional handover....2572
7.3.3.1 NR SA FR2 conditional handover....2574
7.3.3.2 NR SA FR2-FR2 conditional handover....2580
7.3.3.3 NR SA FR2 intra-frequency NES triggering conditional handover....2586
7.3.3.4 NR SA FR2-FR1 inter-frequency NES triggering conditional handover....2589
7.3.3.5 NR SA FR2 NR conditional handover including target MCG and target SCG from FR1-FR2 NR-DC to FR1-FR2 NR-DC....2595
7.3.4 LTM PCell Switch....2600
7.3.4.0 Minimum conformance requirements....2600
7.3.4.0.1 Minimum conformance requirements for NR FR2 LTM PCell Switch....2600
7.3.4.1 NR SA FR2 RACH based Intra-frequency PCell switch from FR2 to FR2....2600
7.3.4.2 NR SA FR2 RACH-less Intra-frequency PCell switch from FR2 to FR2....2606
7.3.4.3 NR SA FR2 RACH-based Inter-frequency LTM PCell switch from FR2 to FR2....2613
7.3.5 LTM PSCell Switch....2619
7.3.5.0 Minimum conformance requirements....2619
7.3.5.1 NR SA FR2 RACH-based Intra-frequency LTM PSCell switch....2619
7.4 Timing....2624
7.4.1 UE transmit timing....2624
7.4.1.0 Minimum Conformance Requirements....2624
7.4.1.0.1 Minimum conformance requirements for UE transmit timing accuracy....2624
7.4.1.1 NR SA FR2 UE transmit timing accuracy....2626
7.4.1.2 2631
7.4.1.3 NR SA FR2 UE Transmit Timing Test with 2-TA for FR2 UE supporting multiDCI-IntraCellMultiTRP-TwoTA-r18....2631
7.4.2 UE timer accuracy....2639
7.4.3 Timing advance....2639
7.4.3.0 Minimum conformance requirements....2639
7.4.3.0.1 Minimum conformance requirements for timing advance adjustment accuracy....2639
7.4.3.1 NR SA FR2 timing advance adjustment accuracy....2639
7.5 Signalling characteristics....2644
7.5.1 Radio link monitoring....2644
7.5.1.0 Minimum conformance requirements....2644
7.5.1.0.1 Minimum conformance requirements for out-of-sync SSB-based RLM....2644
7.5.1.0.2 Minimum conformance requirements for in-sync SSB-based RLM....2644
7.5.1.0.3 Minimum conformance requirements for out-of-sync CSI-RS based RLM....2644
7.5.1.0.4 Minimum conformance requirements for in-sync CSI-RS based RLM....2645
7.5.1.0.5 Minimum conformance requirements for UE scheduling restrictions during radio link monitoring....2645
7.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode....2645
7.5.1.1.1 Test purpose....2645
7.5.1.1.2 Test applicability....2645
7.5.1.1.3 Minimum conformance requirement....2646
7.5.1.1.4 Test description....2646
7.5.1.1.5 Test Requirement....2650
7.5.1.2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode....2651
7.5.1.2.1 Test purpose....2651
7.5.1.2.2 Test applicability....2651
7.5.1.2.3 Minimum conformance requirement....2651
7.5.1.2.4 Test description....2651
7.5.1.2.5 Test Requirement....2655
7.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode....2656
7.5.1.3.1 Test purpose....2656
7.5.1.3.2 Test applicability....2657
7.5.1.3.3 Minimum conformance requirement....2657
7.5.1.3.4 Test description....2657
7.5.1.3.5 Test Requirement....2660

7.5.1.4 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode....2661
7.5.1.4.1 Test purpose....2661
7.5.1.4.2 Test applicability....2661
7.5.1.4.3 Minimum conformance requirement....2661
7.5.1.4.4 Test description....2661
7.5.1.4.5 Test Requirement....2665
7.5.1.5 NR SA FR2 Radio Link Monitoring Out-of-sync Test for PCell configured with CSI-RS-based RLM RS in non-DRX mode....2665
7.5.1.5.1 Test purpose....2666
7.5.1.5.2 Test applicability....2666
7.5.1.5.3 Minimum conformance requirement....2666
7.5.1.5.4 Test description....2666
7.5.1.5.5 Test Requirement....2669
7.5.1.6 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode....2670
7.5.1.6.1 Test purpose....2670
7.5.1.6.2 Test applicability....2670
7.5.1.6.3 Minimum conformance requirement....2671
7.5.1.6.4 Test description....2671
7.5.1.6.5 Test Requirement....2674
7.5.1.7 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM RS in DRX mode....2675
7.5.1.7.1 Test purpose....2675
7.5.1.7.2 Test applicability....2675
7.5.1.7.3 Minimum conformance requirement....2675
7.5.1.7.4 Test description....2675
7.5.1.7.5 Test Requirement....2679
7.5.1.8 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode....2680
7.5.1.8.1 Test purpose....2680
7.5.1.8.2 Test applicability....2680
7.5.1.8.3 Minimum conformance requirement....2680
7.5.1.8.4 Test description....2680
7.5.1.8.5 Test Requirement....2683
7.5.1.9 NR SA FR2 radio link monitoring UE scheduling restrictions....2684
7.5.1.9.1 Test purpose....2685
7.5.1.9.2 Test applicability....2685
7.5.1.9.3 Minimum conformance requirement....2685
7.5.1.9.4 Test description....2685
7.5.1.9.5 Test Requirement....2687
7.5.1.10 NR SA FR2 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx....2688
7.5.2 Interruption....2694
7.5.2.0 Minimum conformance requirements....2694
7.5.2.0.1 Minimum conformance requirements for interruptions during measurements on deactivated NR SCC....2694
7.5.2.0.2 Minimum conformance requirements for SA interruptions at NR SRS carrier-based switching 2695
7.5.2.1 NR SA FR2 interruptions during measurements on deactivated NR SCC....2696
7.5.2.1.1 Test purpose....2697
7.5.2.1.2 Test applicability....2697
7.5.2.1.3 Minimum conformance requirements....2697
7.5.2.1.4 Test description....2697
7.5.2.1.5 Test requirement....2699
7.5.2.2 SA interruptions at NR SRS carrier-based switching....2701
7.5.2.2.1 Test purpose....2701
7.5.2.2.2 Test applicability....2701
7.5.2.2.3 Minimum conformance requirements....2701
7.5.2.2.4 Test description....2701
7.5.2.2.5 Test requirement....2702
7.5.3 SCell activation and deactivation delay....2704
7.5.3.0 Minimum conformance requirements....2704

7.5.3.0.1 Minimum conformance requirements for SCell activation delay for deactivated SCell 2704
7.5.3.0.2 Minimum conformance requirements for SCell deactivation delay for activated SCell 2707
7.5.3.1 NR SA FR2-FR2 intra-band SCell activation and deactivation delay 2707
7.5.3.1.1 Test purpose 2707
7.5.3.1.2 Test applicability 2707
7.5.3.1.3 Minimum conformance requirements 2707
7.5.3.1.4 Test description 2708
7.5.3.1.5 Test requirement 2709
7.5.3.2 NR SA FR1-FR2 inter-band SCell activation and deactivation delay 2709
7.5.3.2.1 Test purpose 2709
7.5.3.2.2 Test applicability 2709
7.5.3.2.3 Minimum conformance requirements 2710
7.5.3.2.4 Test description 2710
7.5.3.2.5 Test requirement 2711
7.5.3.3 SCell Activation and deactivation for SCell in FR2 inter-band in non-DRX 2711
7.5.3.3.1 Test purpose 2711
7.5.3.3.2 Test applicability 2711
7.5.3.3.3 Minimum conformance requirements 2712
7.5.3.3.4 Test description 2712
7.5.3.3.5 Test requirement 2717
7.5.3.4 NR SA FR2 direct SCell activation at SCell addition of known SCell 2718
7.5.3.4.1 Test Purpose 2718
7.5.3.4.2 Test applicability 2718
7.5.3.4.3 Minimum conformance requirements 2718
7.5.3.4.4 Test description 2718
7.5.3.4.5 Test requirement 2723
7.5.3.5 NR SA FR2 direct SCell activation at handover with known SCell 2725
7.5.3.5.1 Test Purpose 2725
7.5.3.5.2 Test applicability 2725
7.5.3.5.3 Minimum conformance requirements 2725
7.5.3.5.4 Test description 2725
7.5.3.5.5 Test requirement 2729
7.5.3.6 to 7.5.3.12 2732
7.5.3.13 NR SA FR2 SCell Activation for SCell in FR2 intra-band in non-DRX 2732
7.5.3.13.1 Test Purpose 2732
7.5.3.13.2 Test applicability 2732
7.5.3.13.3 Minimum conformance requirements 2732
7.5.3.13.4 Test description 2732
7.5.3.13.5 Test requirement 2737
7.5.3.14 NR SA FR2 SCell Activation for known SCell in FR2 inter-band 2739
7.5.3.14.1 Test purpose 2739
7.5.3.14.2 Test applicability 2739
7.5.3.14.3 Minimum conformance requirements 2739
7.5.3.14.4 Test description 2739
7.5.3.14.5 Test requirement 2744
7.5.4 Void 2745
7.5.5 Link recovery procedures 2745
7.5.5.0 Minimum conformance requirements 2745
7.5.5.0.1 Minimum conformance requirements for SSB-based BFD and link recovery procedures 2745
7.5.5.0.2 Minimum conformance requirements for CSI-RS-based BFD and link recovery procedures 2745
7.5.5.0.3 Scheduling availability of UE during beam failure detection and candidate beam detection 2745
7.5.5.0.4 Requirements for Beam Failure Recovery in SCell 2745
7.5.5.0.5 TRP specific Minimum conformance requirements 2746
7.5.5.1 NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX 2747
7.5.5.1.1 Test purpose 2747
7.5.5.1.2 Test applicability 2747
7.5.5.1.3 Minimum conformance requirements 2748
7.5.5.1.4 Test description 2748
7.5.5.1.5 Test requirement 2751
7.5.5.2 NR SA FR2 SSB-based beam failure detection and link recovery in DRX 2752
7.5.5.2.1 Test purpose 2753
7.5.5.2.2 Test applicability 2753

7.5.5.2.3 Minimum conformance requirements....2753
7.5.5.2.4 Test description....2753
7.5.5.2.5 Test requirement....2756
7.5.5.3 NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX....2757
7.5.5.3.1 Test purpose....2758
7.5.5.3.2 Test applicability....2758
7.5.5.3.3 Minimum conformance requirements....2758
7.5.5.3.4 Test description....2758
7.5.5.3.5 Test requirement....2761
7.5.5.4 NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX....2762
7.5.5.4.1 Test purpose....2762
7.5.5.4.2 Test applicability....2762
7.5.5.4.3 Minimum conformance requirements....2762
7.5.5.4.4 Test description....2763
7.5.5.4.5 Test requirement....2766
7.5.5.5 NR SA FR2 scheduling availability restriction during SSB-based beam failure detection and link recovery in non-DRX....2767
7.5.5.5.1 Test purpose....2767
7.5.5.5.2 Test applicability....2767
7.5.5.5.3 Minimum conformance requirements....2767
7.5.5.5.4 Test description....2768
7.5.5.5.5 Test requirement....2771
7.5.5.6 NR SA FR2 Scell CSI-RS-based beam failure detection and link recovery in non-DRX....2772
7.5.5.6.1 Test purpose....2772
7.5.5.6.2 Test applicability....2772
7.5.5.6.3 Minimum conformance requirements....2772
7.5.5.6.4 Test description....2773
7.5.5.6.5 Test requirement....2776
7.5.5.7 NR SA FR2 Scell CSI-RS-based beam failure detection and link recovery in DRX....2778
7.5.5.7.1 Test purpose....2778
7.5.5.7.2 Test applicability....2778
7.5.5.7.3 Minimum conformance requirements....2778
7.5.5.7.4 Test description....2778
7.5.5.7.5 Test requirement....2782
7.5.5.8 FFS....2783
7.5.5.9 NR SA FR2 SCell TRP specific CSI-RS-based Beam Failure Detection and Link Recovery in DRX....2783
7.5.5.9.1 Test purpose....2784
7.5.5.9.2 Test applicability....2784
7.5.5.9.3 Minimum conformance requirements....2784
7.5.5.9.4 Test description....2784
7.5.5.9.5 Test requirements....2789
7.5.5.10 NR SA FR2 PCell TRP specific SSB-based Beam Failure Detection and Link Recovery in non-DRX....2790
7.5.5.10.1 Test purpose....2790
7.5.5.10.2 Test applicability....2790
7.5.5.10.3 Minimum conformance requirements....2790
7.5.5.10.4 Test description....2790
7.5.5.10.5 Test requirement....2794
7.5.6 Active BWP switch delay....2795
7.5.6.1 DCI-based and time-based active BWP switch....2795
7.5.6.1.0 Minimum conformance requirements....2795
7.5.6.1.1 NR SA FR2 DCI-based DL active BWP switch in non-DRX....2796
7.5.6.1.2 NR SA FR1-FR2 DCI-based DL active BWP switch in non-DRX....2797
7.5.6.1.3 NR SA FR2 DCI-based DL active BWP switch in non-DRX....2798
7.5.6.2 RRC-based active BWP switch....2799
7.5.6.2.0 Minimum conformance requirements....2799
7.5.6.2.1 NR SA FR2 RRC-based DL active BWP switch in non-DRX....2799
7.5.6.3 Simultaneous DCI-based and timer-based active BWP switch on multiple CCs....2801
7.5.6.3.0 Minimum conformance requirements....2801
7.5.6.3.1 Active BWP switch on multiple SCells with non-DRX in SA....2805
7.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs....2809

7.5.6.5.0 Minimum conformance requirements 2809
7.5.6.5.0.1 Minimum conformance requirements for active BWP switch on multiple SCells with non-DRX in SA 2809
7.5.6.5.1 Active BWP switch on multiple SCells with non-DRX in SA 2809
7.5.7 PSCell addition and release delay 2815
7.5.7.0 Minimum conformance requirements 2815
7.5.7.0.1 Minimum conformance requirements for PSCell addition delay 2815
7.5.7.0.2 Minimum conformance requirements for PSCell release delay 2816
7.5.7.1 NR SA FR2 addition and release delay of known PSCell 2816
7.5.7.1.1 Test purpose 2816
7.5.7.1.2 Test applicability 2816
7.5.7.1.3 Minimum conformance requirements 2816
7.5.7.1.4 Test description 2817
7.5.7.1.5 Test requirement 2818
7.5.7.2 NR SA FR2 addition and release delay of unknown PSCell 2818
7.5.7.2.1 Test purpose 2818
7.5.7.2.2 Test applicability 2818
7.5.7.2.3 Minimum conformance requirements 2818
7.5.7.2.4 Test description 2819
7.5.7.2.5 Test requirement 2820
7.5.8 Active TCI state switch delay 2820
7.5.8.0 Minimum conformance requirements 2820
7.5.8.0.0 Known conditions for TCI state 2820
7.5.8.0.1 Minimum conformance requirements for MAC-CE based active TCI state switch 2820
7.5.8.0.2 Minimum conformance requirements for RRC based active TCI state switch 2821
7.5.8.0.3 Minimum conformance requirements for MAC-CE based active TCI state switch in HST FR2 2822
7.5.8.0.5 DCI based dual DL TCI state switching delay for mDCI for UE operating in FR2-1 and configured with groupBasedBeamReporting-r17 2823
7.5.8.0.6 DCI based dual DL TCI state switching delay for sDCI for UE operating in FR2-1 and configured with groupBasedBeamReporting-r17 2823
7.5.8.1 NR SA FR2 MAC-CE based active TCI state switch 2823
7.5.8.1.1 NR SA PCell FR2 MAC-CE based active TCI state switch for a known TCI state 2824
7.5.8.2 NR SA FR2 RRC based active TCI state switch 2830
7.5.8.2.1 NR SA Pcell FR2 RRC based active TCI state switch for a known TCI state 2830
7.5.8.3 MAC-CE based active TCI state switch for HST FR2 scenario 2836
7.5.8.3.1 NR SA FR2 HST active TCI state switch for a known TCI state 2836
7.5.8.3.2 NR SA FR2 HST active TCI state switch for PC6 UE supporting *tci-StateSwitchInd-r18* a known TCI state 2841
7.5.8.4 NR SA FR2 DCI based active TCI state switch with m-DCI for simultaneous reception 2846
7.5.8.5 NR SA FR2 Single-DCI based active TCI state switch with known target TCI states for simultaneous reception 2852
7.5.9 Uplink spatial relation switch delay 2857
7.5.9.0 Minimum conformance requirements 2857
7.5.9.0.1 Minimum conformance requirements for MAC-CE based uplink spatial relation switch delay 2857
7.5.9.0.2 Minimum conformance requirements for RRC based uplink spatial relation switch delay 2858
7.5.9.1 MAC-CE based uplink spatial relation switch 2859
7.5.9.1.1 NR PCell FR2 spatial relation associated with known DL-RS 2859
7.5.9.2 RRC based uplink spatial relation switch 2862
7.5.9.2.1 NR PCell FR2 spatial relation switch associated with a known DL-RS 2862
7.5.10 UE specific CBW change 2865
7.5.10.0 Minimum conformance requirements 2865
7.5.10.0.1 Minimum conformance requirements for NR FR2 UE specific CBW change of PCell with non-DRX in SA 2865
7.5.10.1 NR FR2 UE specific CBW change of PCell with non-DRX in SA 2866
7.5.10.1.1 Test purpose 2866
7.5.10.1.2 Test applicability 2866
7.5.10.1.3 Minimum conformance requirements 2866
7.5.10.1.4 Test description 2866
7.5.10.1.5 Test requirement 2867
7.5.11 UE UL carrier RRC reconfiguration delay 2869
7.5.11.1 UE UL carrier RRC reconfiguration delay 2869

7.5.11.1.1 Test purpose 2869
7.5.11.1.2 Test applicability 2870
7.5.11.1.3 Minimum conformance requirements....2870
7.5.11.1.4 Test description 2870
7.5.11.1.5 Test requirement....2872
7.5.12 Conditional PSCell addition and release delay (FR2 SA)....2873
7.5.12.1 NR SA FR2 Addition and Release Delay of PSCell 2873
7.5.13 Unified TCI state switch delay 2878
7.5.13.0 Minimum conformance requirements 2878
7.5.13.0.1 Minimum conformance requirements for MAC-CE based downlink TCI state switch delay for unified TCI....2878
7.5.13.0.2 Minimum conformance requirements for MAC-CE based uplink TCI state switch delay for unified TCI 2878
7.5.13.0.3 Minimum conformance requirements for MAC-CE based uplink TCI state switch delay for unified TCI for 2 known TCI states....2879
7.5.13.1 NR SA FR2 MAC-CE based active joint TCI state switch....2880
7.5.13.1.1 Test purpose 2880
7.5.13.1.2 Test applicability 2880
7.5.13.1.3 Minimum conformance requirements....2880
7.5.13.1.4 Test description 2881
7.5.13.1.5 Test requirement....2885
7.5.13.2 NR SA FR2 MAC-CE based active uplink TCI state switch 2886
7.5.13.2.1 Test purpose 2886
7.5.13.2.2 Test applicability 2886
7.5.13.2.3 Minimum conformance requirements....2886
7.5.13.2.4 Test description 2886
7.5.13.2.5 Test requirement....2890
7.5.13.3 NR SA FR2 MAC-CE based active downlink TCI state switch 2891
7.5.13.3.1 Test purpose 2891
7.5.13.3.2 Test applicability 2891
7.5.13.3.3 Minimum conformance requirements....2891
7.5.13.3.4 Test description 2892
7.5.13.3.5 Test requirement....2895
7.5.13.4 to 7.5.13.5....2897
7.5.13.6 MAC-CE based active uplink TCI state switch for single-DCI mTRP....2897
7.5.13.6.1 NR SA FR2 MAC-CE based active uplink TCI state switch for 2 known TCI states....2897
7.5.14 PSCell activation and deactivation delay....2902
7.5.14.0 Minimum conformance requirements 2902
7.5.14.0.1 SCG Activation Delay Requirement 2902
7.5.14.0.2 SCG Deactivation Delay Requirement....2903
7.5.14.1 NR SA FR2 PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2....2904
7.5.14.1.1 Test purpose 2904
7.5.14.1.2 Test applicability 2904
7.5.14.1.3 Minimum conformance requirements....2904
7.6 Measurement procedures....2908
7.6.1 Intra-frequency measurements....2908
7.6.1.0 Minimum conformance requirements 2908
7.6.1.0.1 Minimum conformance requirements for event-triggered measurement without gap....2908
7.6.1.0.2 Minimum conformance requirements for event-triggered measurement with gap....2910
7.6.1.1 NR SA FR2 event-triggered reporting without gap in non-DRX....2911
7.6.1.2 NR SA FR2 event-triggered reporting without gap in DRX....2916
7.6.1.3 NR SA FR2 event-triggered reporting with gap in non-DRX....2921
7.6.1.4 NR SA FR2 event-triggered reporting with gap in DRX 2927
7.6.1.5 NR SA FR2 event triggered reporting test without gap in non-DRX for UE configured with *highSpeedMeasFlagFR2-r17* 2932
7.6.2 Inter-frequency measurements....2936
7.6.2.0 Minimum conformance requirements for Inter-frequency measurements 2936
7.6.2.0.1 Minimum conformance requirements for Inter-frequency measurement with measurement gaps....2936
7.6.2.0.2 Minimum conformance requirements for Inter-frequency measurement without measurement gaps....2937

7.6.2.1 NR SA FR2-FR2 event-triggered reporting in non-DRX 2939
7.6.2.2 NR SA FR2-FR2 event-triggered reporting in DRX....2943
7.6.2.3 NR SA FR2-FR2 event-triggered reporting in non-DRX with SSB time index detection....2948
7.6.2.4 NR SA FR2-FR2 event-triggered reporting in DRX with SSB time index detection....2952
7.6.2.5 NR SA FR1-FR2 event-triggered reporting in non-DRX 2956
7.6.2.6 NR SA FR1-FR2 event-triggered reporting in DRX....2961
7.6.2.7 NR SA FR1-FR2 event-triggered reporting in non-DRX with SSB time index detection....2967
7.6.2.8 NR SA FR1-FR2 event-triggered reporting in DRX with SSB time index detection....2972
7.6.2.9 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2) (rel16 additional mandatory gap pattern 17) 2977
7.6.2.10 SA event triggered reporting test without gap under non-DRX....2981
7.6.2.11 SA event triggered reporting test without gap under DRX 2984
7.6.2.12 to 7.6.2.19....2988
7.6.2.20 NR SA FR2-FR2 event triggered reporting using MUSIM gap with higher priority....2988
7.6.2.21 NR SA FR2-FR2 event triggered reporting using MUSIM gap with shorter MGRP 2994
7.6.3 L1-RSRP measurement for beam reporting....3000
7.6.3.0 Minimum conformance requirements for L1-RSRP measurement for beam reporting 3000
7.6.3.0.1 Minimum conformance requirements for SSB-based L1-RSRP measurement for beam reporting 3000
7.6.3.0.2 Minimum conformance requirements for CSI-RS-based L1-RSRP measurement for beam reporting 3000
7.6.3.0.3 Minimum conformance requirements for Inter-cell SSB based L1-RSRP Reporting....3000
7.6.3.1 NR SA FR2 SSB-based L1-RSRP measurement in non-DRX 3002
7.6.3.2 NR SA FR2 SSB-based L1-RSRP measurement in DRX....3006
7.6.3.3 NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX....3010
7.6.3.4 NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX 3014
7.6.3.5 NR SA FR2 SSB based L1-RSRP measurement test when DRX is used for power class 6 UE configured with *highSpeedMeasFlagFR2-r17* 3017
7.6.3.6 NR SA FR2 Inter-cell SSB based L1-RSRP measurements on FR2 SCell when DRX is not used....3022
7.6.4 CLI measurements....3028
7.6.4.0 Minimum conformance requirements 3028
7.6.4.0.1 Minimum conformance requirements for SRS-RSRP measurement period....3028
7.6.4.1 NR SA FR2 SRS-RSRP measurement in non-DRX 3029
7.6.4.2 NR SA FR2 CLI-RSSI measurement in non-DRX 3032
7.6.4.2.1 Test purpose 3033
7.6.4.2.2 Test applicability 3033
7.6.4.2.3 Minimum conformance requirements....3033
7.6.4.2.4 Test description 3033
7.6.4.2.5 Test requirement....3034
7.6.5 NR measurements with autonomous gaps 3036
7.6.5.0 Minimum conformance requirements 3036
7.6.5.0.1 Minimum conformance requirements for SA inter-frequency CGI reporting in autonomous gaps test (PCell in FR2)....3036
7.6.5.0.1.1 Minimum conformance requirements for interruptions when identifying CGI of an NR cell with autonomous gaps 3036
7.6.5.0.1.2 Minimum conformance requirements for NR measurements with autonomous gaps....3036
7.6.5.0.1.2.1 Introduction....3036
7.6.5.0.1.2.2 CGI identification of an NR cell with autonomous gaps 3037
7.6.5.0.1.2.3 CGI reporting delay 3037
7.6.5.1 SA inter-frequency CGI reporting in autonomous gaps test (PCell in FR2) 3038
7.6.6 L1-SINR measurement for beam reporting 3042
7.6.6.0 Minimum conformance requirements 3042
7.6.6.0.1 L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured....3042
7.6.6.0.2 L1-SINR reporting with SSB based CMR and dedicated IMR configured 3042
7.6.6.0.3 L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured....3042
7.6.6.1 NR SA FR2 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in non-DRX....3042
7.6.6.2 NR SA FR2 SSB based CMR and dedicated IMR L1-SINR measurement in DRX 3046
7.6.6.3 NR SA FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX 3050
7.6.7 to 7.6.12....3055
7.6.13 UE Rx-Tx time difference measurements for PDC 3055
7.6.13.0 Minimum conformance requirements 3055
7.6.13.0.1 PRS based UE Rx-Tx time difference for propagation delay compensation....3055

7.6.13.0.2 TRS based UE Rx-Tx time difference for propagation delay compensation....3057
7.6.13.1 NR SA FR2 UE Rx-Tx time difference measurement for propagation delay compensation using PRS....3059
7.6.13.2 NR SA FR2 UE Rx-Tx time difference measurement for propagation delay compensation using TRS....3063
7.6.14 SA event triggered reporting tests with Pre-MG....3067
7.6.14.0 Minimum conformance requirements....3067
7.6.14.1 NR SA FR2 event triggered reporting tests with pre-configured measurement gaps and autonomous activation/deactivation....3069
7.6.14.2 NR SA FR2 event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation....3075
7.6.15 SA event triggered reporting tests with concurrent gaps....3081
7.6.15.0 Minimum conformance requirements....3081
7.6.15.0.1 Minimum conformance requirements for Intra-frequency measurement....3081
7.6.15.0.2 Minimum conformance requirements for Inter-frequency measurement....3081
7.6.15.0.3 Minimum conformance requirements for PRS measurement....3082
7.6.15.1 NR SA FR2 event triggered reporting tests with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements....3082
7.6.15.2 NR SA FR2 event triggered reporting tests with concurrent measurement gaps without SSB time index detection when DRX is not used (PCell in FR2)....3087
7.6.15.3 NR SA FR2 event triggered reporting tests with concurrent measurement gaps with partially partial overlapping scenario for SSB-based measurements and PRS-based measurement....3094
7.6.16 SA event triggered reporting tests with NCSG....3099
7.6.16.0 Minimum conformance requirements....3099
7.6.16.0.1 Minimum conformance requirements for intra-frequency measurement....3099
7.6.16.0.2 Minimum conformance requirements for inter-frequency measurement....3101
7.6.16.0.3 Minimum conformance requirements for interruptions....3102
7.6.16.1 NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX....3103
7.6.16.2 NR SA FR2 event triggered reporting tests on inter-frequency measurement with NCSG when DRX is not used (PCell in FR2)....3108
7.6.16.3 NR SA FR2 event triggered reporting tests on deactivated SCell measurement via NCSG in non-DRX....3113
7.6.17 SA event triggered reporting tests for concurrent measurement gaps with Pre-MG in FR2....3118
7.6.17.0 Minimum conformance requirements....3118
7.6.17.0.1 Minimum conformance requirements for SA event triggered reporting with one pre-configured gap and one measurement gap....3118
7.6.17.1 NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX....3118
7.6.17.2 NR SA FR2-FR2 event-triggered reporting with two concurrent Pre-MGs....3122
7.6.18 SA event triggered reporting tests with concurrent gaps and NCSG....3125
7.6.18.0 Minimum conformance requirements....3125
7.6.18.0.1 Minimum conformance requirements for concurrent measurement gaps with NCSG....3125
7.6.18.1 NR SA FR2 event-triggered reporting with concurrent Type-2 measurement gap and NCSG....3126
NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.7.6.19 SA event triggered reporting tests with NeedForGap in FR2....3130
7.6.19.0 Minimum conformance requirements....3130
7.6.19.0.1 Minimum conformance requirements for Intra-frequency measurements with measurement gaps....3130
7.6.19.0.2 Minimum conformance requirements for Intra-frequency measurements without measurement gaps....3132
7.6.19.0.3 Minimum conformance requirements for Inter-frequency measurements without measurement gaps....3137
7.6.19.1 NR SA FR2 event-triggered reporting without interruption outside gap....3142
7.6.19.2 NR SA FR2 SA event triggered reporting test without gap without interruption....3145
7.6.19.3 NR SA FR2 event triggered reporting test without gap without interruption under non-DRX....3149
7.6.20 LTM Intra-frequency L1-RSRP measurement....3152
7.6.20.0 Minimum conformance requirements....3152
7.6.20.0.1 Minimum conformance requirements for SSB-based intra-frequency L1-RSRP measurement....3152
7.6.20.1 NR SA FR2 Intra-frequency SSB based L1-RSRP measurement....3154
7.6.21 LTM Inter-frequency L1-RSRP measurement with measurement gap....3159
7.6.21.0 Minimum conformance requirements....3159

7.6.21.0.1 Minimum conformance requirements for SSB-based inter-frequency L1-RSRP measurement with gap 3159
7.6.21.1 NR SA FR2 Inter-frequency SSB-based L1-RSRP measurement with measurement gap for LTM 3159
7.6.22 LTM Inter-frequency L1-RSRP measurement without measurement gap 3165
7.6.22.0 Minimum conformance requirements 3165
7.6.22.1 NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX 3165
7.7 Measurement performance requirements 3169
7.7.1 SS-RSRP 3169
7.7.1.0 Minimum conformance requirements 3169
7.7.1.0.1 Intra-frequency SS-RSRP measurement accuracy requirements 3169
7.7.1.0.2 Inter-frequency SS-RSRP measurement accuracy requirements 3169
7.7.1.1 NR SA FR2 SS-RSRP measurement accuracy 3169
7.7.1.2 NR SA FR2-FR2 SS-RSRP measurement accuracy 3177
7.7.1.3 Inter-frequency measurements between FR1 and FR2 3184
7.7.1.3.1 NR SA FR1-FR2 SS-RSRP measurement accuracy 3184
7.7.1.3.2 Void 3189
7.7.2 SS-RSRQ 3189
7.7.2.0 Minimum conformance requirements 3189
7.7.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements 3189
7.7.2.0.2 Inter-frequency SS-RSRQ measurement accuracy requirements 3189
7.7.2.1 NR SA FR2 SS-RSRQ measurement accuracy 3189
7.7.2.2 NR SA FR2-FR2 SS-RSRQ measurement accuracy 3193
7.7.3 SS-SINR 3199
7.7.3.0 Minimum conformance requirements 3199
7.7.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements 3199
7.7.3.0.2 Inter-frequency SS-SINR measurement accuracy requirements 3199
7.7.3.1 NR SA FR2 SS-SINR measurement accuracy 3199
7.7.3.2 NR SA FR2-FR2 SS-SINR measurement accuracy 3203
7.7.4 L1-RSRP 3209
7.7.4.0 Minimum conformance requirements 3209
7.7.4.0.1 SSB-based L1-RSRP absolute measurement accuracy requirements 3209
7.7.4.0.2 SSB-based L1-RSRP relative measurement accuracy requirements 3209
7.7.4.0.3 CSI-RS-based L1-RSRP absolute measurement accuracy requirements 3209
7.7.4.0.4 CSI-RS-based L1-RSRP relative measurement accuracy requirements 3209
7.7.4.1 NR SA FR2 SSB based L1-RSRP measurement accuracy 3209
7.7.4.2 NR SA FR2 CSI-RS based L1-RSRP measurement accuracy 3214
7.7.5 SRS-RSRP 3219
7.7.5.0 Minimum conformance requirements 3219
7.7.5.0.1 Minimum conformance requirements for SRS-RSRP measurement accuracy 3219
7.7.5.1 NR SA FR2 SRS-RSRP measurement accuracy 3221
7.7.5.2 NR SA FR2 CLI-RSSI measurement accuracy 3225
7.7.5.2.1 Test purpose 3225
7.7.5.2.2 Test applicability 3225
7.7.5.2.3 Minimum conformance requirements 3225
7.7.5.2.4 Test description 3225
7.7.5.2.4 Test description 3226
7.7.5.2.5 Test requirement 3226
7.7.6 L1-SINR 3228
7.7.6.0 Minimum conformance requirements 3228
7.7.6.0.1 Minimum conformance requirements for CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off 3228
7.7.6.0.2 Minimum conformance requirements for SSB based CMR and dedicated IMR L1-SINR measurement accuracy 3230
7.7.6.0.3 Minimum conformance requirements for CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy 3232
7.7.6.1 NR SA FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy 3235
7.7.6.2 NR SA FR2 SSB based CMR and dedicated IMR L1-SINR measurement accuracy 3239
7.7.6.3 NR SA FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy 3243
7.7.7 CSI-RSRP 3248
7.7.7.0 Minimum conformance requirements 3248
7.7.7.1 Intra-frequency measurements 3248

7.7.7.1.1 NR SA FR2 CSI-RSRP measurement accuracy 3248
7.7.7.2 Inter-frequency measurements 3251
7.7.7.2.1 NR SA FR2-FR2 CSI-RSRP measurement accuracy 3251
7.7.8 CSI-RSRQ 3254
7.7.8.0 Minimum conformance requirements 3254
7.7.8.0.1 Intra-frequency CSI-RSRQ accuracy requirements 3254
7.7.8.0.1.1 Absolute CSI-RSRQ accuracy 3254
7.7.8.0.2 Inter-frequency CSI-RSRQ accuracy requirements 3255
7.7.8.0.2.1 Absolute CSI-RSRQ accuracy 3255
7.7.8.0.2.2 Relative CSI-RSRQ accuracy 3257
7.7.8.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell 3257
7.7.8.1.1 Test purpose 3257
7.7.8.1.2 Test applicability 3258
7.7.8.1.3 Minimum conformance requirements 3258
7.7.8.1.4 Test description 3258
7.7.8.1.5 Test Requirements 3259
7.7.8.2 SA inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 3261
7.7.8.2.1 Test purpose 3261
7.7.8.2.2 Test applicability 3261
7.7.8.2.3 Minimum conformance requirements 3261
7.7.8.2.4 Test description 3261
7.7.8.2.5 Test Requirements 3263
7.7.9 CSI-SINR 3264
7.7.9.0 Minimum conformance requirements 3264
7.7.9.0.1 Intra-frequency CSI-SINR accuracy requirements 3264
7.7.9.0.1.1 Absolute CSI-SINR accuracy 3265
7.7.9.0.2 Inter-frequency CSI-SINR accuracy requirements 3266
7.7.9.0.2.1 Absolute CSI-SINR accuracy 3266
7.7.9.0.2.2 Relative CSI-SINR accuracy 3267
7.7.9.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell 3268
7.7.9.1.1 Test purpose 3268
7.7.9.1.2 Test applicability 3268
7.7.9.1.3 Minimum conformance requirements 3268
7.7.9.1.4 Test description 3268
7.7.9.1.5 Test Requirements 3270
7.7.9.2 SA inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell 3272
7.7.9.2.1 Test purpose 3272
7.7.9.2.2 Test applicability 3272
7.7.9.2.3 Minimum conformance requirements 3272
7.7.9.2.4 Test description 3272
7.7.9.2.5 Test Requirements 3274
7.7.10 to 7.7.13 3276
7.7.14 L1-RSRP measurement for group-based beam reporting 3276
7.7.14.1 NR SA FR2 SSB based L1-RSRP measurement for group-based beam reporting 3276
7.7.14.2 NR SA FR2 CSI-RS based L1-RSRP measurement on resource set with repetition off 3278
7.7.15 LTM L1-RSRP measurement 3280
7.7.15.0 Minimum conformance requirements 3280
7.7.15.0.1 SSB based absolute L1-RSRP measurement accuracy requirements 3280
7.7.15.0.2 SSB based relative L1-RSRP measurement accuracy requirements 3281
7.7.15.1 NR SA FR2 SSB based inter-frequency L1-RSRP measurement 3281
8.0 General 3288
8.1 Void 3288
8.2.1.0 Minimum conformance requirements 3288
8.2.1.0.1 Minimum conformance requirements for E-UTRA-NR FR1 inter-RAT cell reselection 3288
8.2.1.1 E-UTRA - NR FR1 cell re-selection to higher priority NR target cell 3290
8.2.1.2 E-UTRA - NR FR1 Cell reselection to lower priority NR target Cell in FR1 for UE configured with highSpeedInterRAT-NR-r16 3296
8.2.2.0 Minimum conformance requirements 3302
8.2.2.1 E-UTRA – NR FR1 Early Measurement Reporting 3304
8.2.2.2 E-UTRA – NR FR2 Early Measurement Reporting 3310
8.3.1.0 Minimum conformance requirements 3314
8.3.1.0.1 Minimum conformance requirements for E-UTRA - NR FR1 handover 3314

8.3.1.1 E-UTRA - NR FR1 handover with known target cell 3315
8.4.1.0 Minimum conformance requirements 3320
8.4.1.0.1 Minimum conformance requirements for E-UTRA - NR FR1 SFTD measurement delay 3320
8.4.1.1 E-UTRA - NR FR1 SFTD measurement delay in non-DRX 3321
8.4.1.2 E-UTRA - NR FR1 SFTD measurement delay in DRX 3326
8.4.2.0 Minimum conformance requirements 3331
8.4.2.0.1 Minimum conformance requirements for E-UTRA - NR event-triggered measurement 3331
8.4.2.0.2 Void 3335
8.4.2.1 E-UTRA event-triggered reporting of a NR FR1 neighbour cell without SSB time index detection in non-DRX 3335
8.4.2.2 E-UTRA event-triggered reporting of a NR FR1 neighbour cell without SSB time index detection in DRX 3340
8.4.2.3 E-UTRA event-triggered reporting of a NR FR1 neighbour cell with SSB time index detection in non-DRX 3345
8.4.2.4 E-UTRA event-triggered reporting of a NR FR1 neighbour cell with SSB time index detection in DRX 3350
8.4.2.5 E-UTRA event-triggered reporting of a NR FR2 neighbour cell without SSB time index detection in non-DRX 3355
8.4.2.6 E-UTRA event-triggered reporting of a NR FR2 neighbour cell without SSB time index detection in DRX 3360
8.4.2.7 E-UTRA event-triggered reporting of a NR FR2 neighbour cell with SSB time index detection in non-DRX 3364
8.4.2.8 E-UTRA event-triggered reporting of a NR FR2 neighbour cell with SSB time index detection in DRX 3369
8.4.2.9 E-UTRA event triggered reporting of a NR FR1 neighbour cell with SSB time index detection in DRX for UE configured with highSpeedInterRAT-NR-r16 3374
8.4.3 Inter-RAT measurements without gaps 3379
8.4.3.0 Minimum conformance requirements 3379
8.4.3.0.1 Minimum conformance requirements for inter-RAT event-triggered reporting without gap 3379
8.4.3.1 E-UTRAN - NR SA FR2 event-triggered reporting without gap with interruption 3379
8.5.1 SFTD measurement accuracy 3382
8.5.1.0 Minimum conformance requirements 3382
8.5.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements 3382
8.5.1.1 E-UTRA - NR FR1 SFTD measurement accuracy 3383
8.5.2 Inter-RAT measurement accuracy 3389
8.5.2.1 SS-RSRP 3389
8.5.2.1.0 Minimum conformance requirements 3389
8.5.2.1.1 SS-RSRP with NR FR1 target cell 3389
8.5.2.1.2 E-UTRA SS-RSRP absolute measurement accuracy of a NR FR2 neighbour cell 3394
8.5.2.2 SS-RSRQ 3398
8.5.2.2.0 Minimum conformance requirements 3398
8.5.2.2.1 E-UTRA SS-RSRQ absolute measurement accuracy of a NR FR1 neighbour cell 3398
8.5.2.2.2 E-UTRA SS-RSRQ absolute measurement accuracy of a NR FR2 neighbour cell 3401
8.5.2.3 SS-SINR 3405
8.5.2.3.0 Minimum conformance requirements 3405
8.5.2.3.1 E-UTRA SS-SINR absolute measurement accuracy of a NR FR1 neighbour cell 3405
8.5.2.3.2 E-UTRA SS-SINR absolute measurement accuracy of a NR FR2 neighbour cell 3408

9 NR sidelink 3412
9.1 NR sidelink in FR1 3412
9.1.1 UE transmit timing 3412
9.1.1.0 Minimum conformance requirements 3412
9.1.1.0.1 Minimum conformance requirements for GNSS as synchronization reference source 3412
9.1.1.0.2 Minimum conformance requirements for SyncRef UE as synchronization reference source 3413
9.1.1.0.3 Minimum conformance requirements for FR1 NR Cell as synchronization reference source 3413
9.1.1.1 NR SA FR1 UE transmit timing accuracy for GNSS as synchronization reference source 3414
9.1.1.2 NR SA FR1 UE transmit timing accuracy for SyncRef UE as synchronization reference source 3416
9.1.1.3 NR SA FR1 UE transmit timing accuracy for FR1 NR cell as synchronization reference source 3418
9.1.2 Initiation/Cease of S-SSB transmission 3423
9.1.2.0 Minimum conformance requirements 3423
9.1.2.0.1 Minimum conformance requirements for FR1 NR cell as synchronization reference source 3423
9.1.1.0.2 Minimum conformance requirements for SyncRef UE as synchronization reference source 3424

9.1.2.1 NR SA FR1 initiation/cease of S-SSB transmission for FR1 NR cell as synchronization reference source 3426
9.1.2.2 NR SA FR1 initiation/cease of S-SSB transmission for SyncRef UE as synchronization reference source 3430
9.1.3 Synchronization reference selection/reselection 3433
9.1.3.0 Minimum conformance requirements 3433
9.1.3.0.1 Minimum conformance requirements for GNSS configured as the highest priority synchronization reference source 3433
9.1.3.0.2 Minimum conformance requirements for eNB/gNB configured as the highest priority synchronization reference source 3435
9.1.3.1 NR SA FR1 synchronization reference selection/reselection for GNSS configured as the highest priority synchronization reference source 3437
9.1.3.2 NR SA FR1 synchronization reference selection/reselection for FR1 NR Cell configured as the highest priority synchronization reference source 3442
9.1.4 L1 SL-RSRP measurements 3447
9.1.4.0 Minimum conformance requirements 3447
9.1.4.0.1 Minimum conformance requirements for resource selection/reselection, re-evaluation and pre-emption 3447
9.1.4.1 NR SA FR1 L1 SL-RSRP measurement for autonomous resource selection/reselection 3448
9.1.4.2 NR SA FR1 L1 SL-RSRP measurement for resource pre-emption 3453
9.1.4.3 NR SA FR1 L1 SL-RSRP measurement for resource re-evaluation 3458
9.1.5 Congestion control measurement 3465
9.1.5.0 Minimum conformance requirements 3465
9.1.5.0.1 Minimum conformance requirements for congestion control measurements 3465
9.1.5.1 NR SA FR1 congestion control measurement for concurrent operation 3466
9.1.5.2 NR SA FR1 congestion control measurement for PC5-only operation 3473
9.1.6 Congestion control measurement 3479
9.1.6.0 Minimum conformance requirements 3479
9.1.6.0.1 Minimum conformance requirements for interruption to WAN due to NR sidelink communication 3479
9.1.6.1 NR SA FR1 interruption to WAN due to NR sidelink communication 3479

10 EN-DC Tests with NR PSCell under CCA and Other NR Cells in FR1 3483
10.0 General 3483
10.0.1 Principle of testing for UE capable of EN-DC with only NR bands with shared spectrum access 3483
10.1 RRC_CONNECTED state mobility 3484
10.1.1 Random Access 3484
10.1.1.0 Minimum conformance requirements 3484
10.1.1.0.1 Minimum conformance requirements for 4-step RA type 3484
10.1.1.0.1.1 Contention based random access 3484
10.1.1.0.1.1.1 Correct behaviour when transmitting Random Access Preamble 3484
10.1.1.0.1.1.2 Correct behaviour when receiving Random Access Response 3485
10.1.1.0.1.1.3 Correct behaviour when not receiving Random Access Response 3485
10.1.1.0.1.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission 3485
10.1.1.0.1.1.6 Correct behaviour when contention Resolution timer expires 3485
10.1.1.0.1.2 Non-Contention based random access 3485
10.1.1.0.1.2.1 Correct behaviour when transmitting Random Access Preamble 3485
10.1.1.0.1.2.2 Correct behaviour when receiving Random Access Response 3486
10.1.1.0.1.2.3 Correct behaviour when not receiving Random Access Response 3486
10.1.1.0.2 Minimum conformance requirements for 2-step RA type 3486
10.1.1.0.2.1 Contention based random access 3487
10.1.1.0.2.1.1 Correct behaviour when transmitting MsgA 3487
10.1.1.0.2.1.2 Correct behaviour when receiving MsgB 3487
10.1.1.0.2.1.3 Correct behaviour when not receiving MsgB 3487
10.1.1.0.2.2 Non-Contention based random access 3488
10.1.1.0.2.2.1 Correct behaviour when transmitting MsgA 3488
10.1.1.0.2.2.2 Correct behaviour when receiving MsgB 3488
10.1.1.0.2.2.3 Correct behaviour when not receiving MsgB 3488
10.1.1.1.1 EN-DC FR1 4-step RA type contention based random access test for NR PSCell with CCA 3489
10.1.1.1.2 EN-DC FR1 4-step RA type non-contention based random access for NR PSCell with CCA 3495
10.1.1.1.3 EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA 3501
10.1.1.1.4 EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA 3507

10.1.2 EN-DCFR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA.....3514
10.2 Timing.....3521
10.2.1 UE transmit timing.....3521
10.2.1.0 Minimum conformance requirements.....3521
10.2.1.0.1 Minimum conformance requirements for UE transmit timing accuracy.....3521
10.2.1.1 EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA.....3522
10.2.2 UE timing advance.....3527
10.2.2.0 Minimum conformance requirements.....3527
10.2.2.0.1 Minimum conformance requirements for timing advance adjustment delay.....3527
10.2.2.0.2 Minimum conformance requirements for timing advance adjustment accuracy.....3528
10.2.2.1 EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA.....3528
10.3 Signalling characteristics.....3533
10.3.1 Radio link monitoring.....3533
10.3.1.0 General.....3533
10.3.1.0.1 Minimum conformance requirements for SSB based Radio Link Monitoring under CCA.....3534
10.3.1.1 Requirements for determining UE in-sync or out-of-sync status.....3536
10.3.1.2 EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA.....3537
10.3.1.3 EN-DC FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA.....3542
10.3.1.4 Void.....3548
10.3.1.5 Void.....3548
10.3.2 Void.....3548
10.3.3 SCell activation and deactivation delay.....3548
10.3.3.0 Minimum Conformance Requirements.....3548
10.3.3.0.1 SCell Activation Delay Requirement for Deactivated SCell under CCA.....3548
10.3.3.0.2 SCell Deactivation Delay Requirement for Activated SCell under CCA.....3552
10.3.3.1 EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle.....3553
10.3.3.2 EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle.....3560
10.3.3.3 EN-DC FR1 SCell Activation and Deactivation of unknown NR SCell with NR PSCell and NR SCell under CCA.....3563
10.3.4 Beam failure detection and link recovery procedures.....3566
10.3.4.0 General.....3566
10.3.4.0.1 Minimum conformance requirements for SSB based Beam Failure Detection under CCA.....3567
10.3.4.0.3 Scheduling availability of UE during beam failure detection under CCA.....3569
10.3.4.0.4 Scheduling availability of UE during candidate beam detection under CCA.....3569
10.3.4.1 EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode.....3569
10.3.4.2 EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode.....3576
10.3.5 Active BWP switching.....3583
10.3.5.1 EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA.....3583
10.3.5.2 DCI-based and Timer-based Active BWP Switch.....3590
10.3.5.2.0 Minimum conformance requirements.....3590
10.3.5.2.1 EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA.....3593
10.3.5.2.2 EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA.....3601
10.3.5.3 RRC-based Active BWP Switch.....3608
10.3.5.3.0 Minimum conformance requirements.....3608
10.3.5.3.1 EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA.....3608
10.3.6 PSCell addition and release delay.....3614
10.3.6.0 Minimum conformance requirements.....3614
10.3.6.0.1 NR PSCell Addition Delay Requirement.....3614
10.3.6.0.2 NR PSCell Release Delay Requirement.....3615
10.3.6.1 EN-DC FR1 Addition and Release Delay of known NR PSCell on the carrier under CCA.....3616
10.4 Measurement procedures.....3621
10.4.1 Intra-frequency measurements.....3621

10.4.1.0 Minimum conformance requirements 3621
10.4.1.1 EN-DC FR1 Event-triggered reporting tests on PSCC without gaps under non-DRX and CCA 3634
10.4.1.2 Void....3638
10.4.1.3 Void....3638
10.4.1.4 EN-DC FR1 Event-triggered reporting tests on PSCC with per-UE gaps under DRX and CCA 3638
10.4.2 Inter-frequency measurements....3643
10.4.2.0 Minimum conformance requirements 3643
10.4.2.1 Void....3648
10.4.2.2 Void....3648
10.4.2.3 EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is not used 3648
10.4.2.4 EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used 3653
10.4.2.5 EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is not used 3658
10.4.2.6 EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is used 3663
10.4.2.7 EN-DC FR1-FR1 Event-triggered reporting for FR1 cell without SSB time index detection when DRX is not used 3668
10.4.2.8 EN-DC FR1-FR1 Event triggered reporting for FR1 cell without SSB time index detection when DRX is used 3674
10.4.2.9 EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with SSB time index detection when DRX is not used 3680
10.4.2.10 EN-DC FR1-FR1 Event triggered reporting for FR1 cell with SSB time index detection when DRX is used 3685
10.4.3 L1-RSRP measurement for beam reporting under CCA....3691
10.4.3.0 Minimum conformance requirements 3691
10.4.3.1 EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is not used 3693
10.4.3.2 EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is used 3698
10.4.3.3 EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used 3701
10.4.3.4 EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used 3706
10.4.4 E-UTRAN-NR inter-RAT measurements on NR carrier frequency under CCA....3710
10.4.4.0 Minimum conformance requirements 3710
10.4.4.1 EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used 3713
10.4.4.2 EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used 3719
10.4.4.3 EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used 3725
10.4.4.4 EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used 3731
10.5 Measurement Performance....3736
10.5.1 SS-RSRP....3736
10.5.1.0 Minimum Conformance Requirements....3736
10.5.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements under CCA 3737
10.5.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements under CCA....3737
10.5.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements under CCA 3738
10.5.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements under CCA....3738
10.5.1.1 EN-DC FR1 intra-frequency SS-RSRP measurement accuracy on a CCA serving cell 3739
10.5.1.2 EN-DC FR1-FR1 inter-frequency SS-RSRP measurement accuracy with CCA serving cell and CCA target cell....3743
10.5.2 SS-RSRQ....3748
10.5.2.0 Minimum Conformance Requirements....3748
10.5.2.0.1 Intra-frequency absolute SS-RSRQ measurement accuracy requirements under CCA....3748
10.5.2.0.2 Void....3749
10.5.2.0.3 Inter-frequency absolute SS-RSRQ measurement accuracy requirements under CCA....3749
10.5.2.0.4 Inter-frequency relative SS-RSRQ measurement accuracy requirements under CCA 3749
10.5.2.1 EN-DC FR1 intra-frequency SS-RSRQ measurement accuracy with serving cell and target cell under CCA 3750
10.5.2.2 EN-DC FR1-FR1 inter-frequency SS-RSRQ measurement accuracy with serving cell and target cell under CCA....3754
10.5.3 SS-SINR 3758

10.5.3.0 Minimum Conformance Requirements 3758
10.5.3.0.1 Intra-frequency absolute SS-SINR measurement accuracy requirements under CCA 3758
10.5.3.0.2 Void 3759
10.5.3.0.3 Inter-frequency absolute SS-SINR measurement accuracy requirements under CCA 3759
10.5.3.0.4 Inter-frequency relative SS-SINR measurement accuracy requirements under CCA 3759
10.5.3.1 EN-DC FR1 intra-frequency SS-SINR measurement accuracy on PSCC under CCA 3760
10.5.3.2 EN-DC FR1-FR1 inter-frequency SS-SINR measurement accuracy on PSCC under CCA 3764
10.5.3.3 EN-DC FR1 intra-frequency SS-SINR measurement accuracy on SCC under CCA 3769
10.5.4 L1-RSRP measurement accuracy for beam reporting with CCA serving cell 3773
10.5.4.0 Minimum conformance requirements 3773
10.5.4.1 EN-DC FR1 SSB based L1-RSRP measurement accuracy with CCA 3774
10.5.5 RSSI 3779
10.5.5.0 Minimum Conformance Requirements 3779
10.5.5.0.1 Intra-frequency absolute RSSI measurement accuracy requirements in FR1 3779
10.5.5.0.2 Inter-frequency absolute RSSI measurement accuracy requirements in FR1 3779
10.5.5.1 EN-DC FR1 RSSI measurement accuracy on PSCC with CCA 3780
10.5.5.2 EN-DC FR1 RSSI measurement accuracy on SCC with CCA 3783
10.5.5.3 EN-DC FR1-FR1 RSSI measurement accuracy on a carrier with CCA 3788
10.5.6 Channel occupancy 3792
10.5.6.0 Minimum Conformance Requirements 3792
10.5.6.0.1 Intra-frequency channel occupancy measurement accuracy requirements in FR1 3792
10.5.6.0.2 Inter-frequency channel occupancy measurement accuracy requirements in FR1 3793
10.5.6.1 EN-DC FR1 Channel occupancy measurement accuracy on PSCC with CCA 3793
10.5.6.2 EN-DC FR1 Channel occupancy measurement accuracy on SCC with CCA 3797
10.5.6.3 EN-DC FR1-FR1 Channel occupancy measurement accuracy on a carrier with CCA 3801

11 NR Standalone Tests with NR PCell under CCA and Other NR Cells in FR1 3805
11.0 General 3805
11.0.1 Principle of testing for UE capable of EN-DC with only NR bands with shared spectrum access 3805
11.1 RRC_IDLE state mobility 3806
11.1.1 Cell re-selection with both source and target NR carrier frequencies under CCA 3806
11.1.1.0 Minimum conformance requirements 3806
11.1.1.0.1 Minimum conformance requirements for intra-frequency cell re-selection with both source and target NR carrier frequencies under CCA 3806
11.1.1.0.2 Minimum conformance requirements for for inter-frequency cell re-selection with target NR carrier frequency under CCA 3807
11.1.1.1 NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell 3809
11.1.1.2 NR SA FR1 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell 3814
11.1.2 Cell re-selection to NR with source NR carrier frequency under CCA 3819
11.1.2.0 Minimum conformance requirements 3819
11.1.2.1 NR SA FR1 Cell re-selection to NR with source NR carrier frequency under CCA 3819
11.1.3 Cell re-selection from NR carrier with target NR carrier frequency under CCA 3824
11.1.3.0 Minimum conformance requirements 3824
11.1.3.1 NR SA FR1 Cell re-selection from NR carrier with target NR carrier frequency under CCA 3825
11.1.4 Inter-RAT cell re-selection to E-UTRAN with source NR carrier frequency under CCA 3830
11.1.4.0 Minimum conformance requirements 3830
11.1.4.0.1 Minimum conformance requirements for Inter-RAT cell re-selection to E-UTRAN with source NR carrier frequency under CCA 3830
11.1.4.1 NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA 3830
11.1.4.2 NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA 3836
11.2 RRC_CONNECTED state mobility 3841
11.2.1 Handover 3841
11.2.1.0 Minimum conformance requirements 3841
11.2.1.0.1 Minimum conformance requirements for NR FR1 - NR FR1 Handover 3841
11.2.1.1 NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell 3842
11.2.1.2 NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell 3847
11.2.1.3 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell 3851

11.2.1.4 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell 3855
11.2.1.5 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell .3859
11.2.1.6 NR SA FR1 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell .3863
11.2.1.7 NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell 3867
11.2.1.8 NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell.....3874
11.2.2 RRC connection mobility control 3879
11.2.2.1 RRC re-establishment 3879
11.2.2.1.0 Minimum conformance requirements.....3879
11.2.2.1.1 NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1 3881
11.2.2.1.2 NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1 3885
11.2.2.1.3 NR SA FR1 Intra-frequency RRC Re-establishment with CCA without serving cell timing 3890
11.2.2.1.4 NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA 3895
11.2.2.2 Random Access.....3899
11.2.2.2.0 Minimum conformance requirements.....3899
11.2.2.2.1 NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA 3904
11.2.2.2.2 NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA 3911
11.2.2.2.3 NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA 3918
11.2.2.2.4 NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA 3923
11.2.2.3 RRC connection release with redirection.....3930
11.2.2.3.0 Minimum conformance requirements.....3930
11.2.2.3.1 NR SA FR1 Redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA 3931
11.2.2.3.2 NR SA FR1 Redirection from NR FR1 carrier without CCA to NR FR1 carrier under CCA 3935
11.3 Timing 3939
11.3.1 UE transmit timing 3939
11.3.1.0 Minimum conformance requirements 3939
11.3.1.0.1 Minimum conformance requirements for UE transmit timing accuracy 3939
11.3.1.1 NR SA FR1 UE Transmit Timing Test with PCell under DL CCA.....3940
11.3.2 UE timing advance.....3945
11.3.2.0 Minimum conformance requirements 3945
11.3.2.0.1 Minimum conformance requirements for timing advance adjustment delay.....3945
11.3.2.0.2 Minimum conformance requirements for timing advance adjustment accuracy 3946
11.3.2.1 NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA 3946
11.4 Signalling characteristics.....3951
11.4.1 Radio link monitoring.....3951
11.4.1.0 General.....3951
11.4.1.0.1 Minimum conformance requirements for SSB based radio link monitoring under CCA.....3951
11.4.1.1 Requirements for determining UE in-sync or out-of-sync status 3951
11.4.1.2 NR SA FR1 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA 3951
11.4.1.3 NR SA FR1 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA 3956
11.4.2 Void 3962
11.4.3 SCell activation and deactivation delay 3962
11.4.3.0 Minimum conformance requirements 3962
11.4.3.0.1 Minimum conformance requirements for SCell activation and deactivation delay.....3962
11.4.3.1 NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle 3962
11.4.3.2 NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 640 ms SCell measurement cycle 3969
11.4.3.3 NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA 3972
11.4.4 Beam failure detection and link recovery procedures.....3975
11.4.4.0 General.....3975
11.4.4.0.1 Minimum conformance requirements for SSB based Beam Failure Detection under CCA.....3975
11.4.4.0.2 Void.....3976
11.4.4.0.3 Scheduling availability of UE during beam failure detection under CCA.....3976
11.4.4.0.4 Scheduling availability of UE during candidate beam detection under CCA.....3976
11.4.4.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA.....3976
11.4.4.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA 3983

11.4.5 Active BWP switching....3989
11.4.5.1 NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA....3989
11.4.5.2 DCI-based and Timer-based Active BWP Switch....3996
11.4.5.2.0 Minimum conformance requirements....3996
11.4.5.2.1 NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA....3998
11.4.5.2.2 NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA....4005
11.4.5.3 RRC-based Active BWP Switch....4012
11.4.5.3.0 Minimum conformance requirements....4013
11.4.5.3.1 NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA....4013
11.5 Measurement procedure....4018
11.5.1 Intra-frequency measurements....4018
11.5.1.0 Minimum Conformance Requirements....4018
11.5.1.1 SA FR1 Event-triggered reporting tests on PCC without gaps under non-DRX....4019
11.5.1.2 SA FR1 Event-triggered reporting tests on PCC without gaps under DRX....4023
11.5.2 Inter-frequency measurements....4027
11.5.2.0 Minimum Conformance Requirements....4027
11.5.2.3 NR SA FR1-FR1 Event triggered reporting tests with CCA without SSB time index detection when DRX is not used....4028
11.5.2.4 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used....4033
11.5.2.5 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used....4038
11.5.2.6 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used....4043
11.5.2.7 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used....4048
11.5.2.8 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used....4053
11.5.2.9 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used....4059
11.5.2.10 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used....4064
11.5.3 Inter-RAT E-UTRAN measurements....4069
11.5.3.0 Minimum conformance requirements....4069
11.5.3.1 NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX....4069
11.5.3.2 NR SA FR1 - E-UTRAN event-triggered reporting in DRX....4074
11.5.4 L1-RSRP measurements for beam reporting....4078
11.5.4.0 Minimum conformance requirements....4078
11.5.4.1 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used....4078
11.5.4.2 NR SA FR1 SSB based L1-RSRP measurement when DRX is used....4083
11.5.4.3 NR SA FR1 SSB based L1-RSRP measurement on SCC when DRX is not used....4086
11.5.4.4 NR SA FR1 SSB based L1-RSRP measurement on SCC when DRX is used....4090
11.6 Measurement Performance....4093
11.6.1 SS-RSRP....4093
11.6.1.0 Minimum Conformance Requirements....4093
11.6.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements under CCA....4093
11.6.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements under CCA....4093
11.6.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements under CCA....4093
11.6.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements under CCA....4093
11.6.1.1 NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA....4093
11.6.1.2 NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA....4098
11.6.2 SS-RSRQ....4102
11.6.2.0 Minimum Conformance Requirements....4102
11.6.2.0.1 Intra-frequency absolute SS-RSRQ measurement accuracy requirements under CCA....4102
11.6.2.0.2 Void....4102
11.6.2.0.3 Inter-frequency absolute SS-RSRQ measurement accuracy requirements under CCA....4102
11.6.2.0.4 Inter-frequency relative SS-RSRQ measurement accuracy requirements under CCA....4102
11.6.2.1 NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA....4102
11.6.2.2 NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA....4106
11.6.2.3 NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on SCC on a carrier frequency with CCA....4110

11.6.2.4 NR SA FR1 Inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA from carrier without CCA 4114
11.6.3 SS-SINR 4120
11.6.3.0 Minimum Conformance Requirements 4120
11.6.3.0.1 Intra-frequency absolute SS-SINR measurement accuracy requirements under CCA 4120
11.6.3.0.2 Void 4121
11.6.3.0.3 Inter-frequency absolute SS-SINR measurement accuracy requirements under CCA 4121
11.6.3.0.4 Inter-frequency relative SS-SINR measurement accuracy requirements under CCA 4121
11.6.3.1 NR SA FR1 Intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA 4121
11.6.3.2 NR SA FR1 Inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA 4125
11.6.3.3 NR SA FR1 Intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA 4129
11.6.3.4 NR SA FR1 Inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA 4133
11.6.4 L1-RSRP measurement accuracy for beam reporting with CCA serving cell 4139
11.6.4.0 Minimum conformance requirements 4139
11.6.4.0.1 Minimum conformance requitements for SSB-based L1-RSRP measurement accuracy for beam reporting under CCA 4139
11.6.4.1 NR SA FR1 SSB based L1-RSRP measurement accuracy with CCA 4139
11.6.5 RSSI 4143
11.6.5.0 Minimum Conformance Requirements 4143
11.6.5.0.1 Intra-frequency absolute RSSI measurement accuracy requirements in FR1 4143
11.6.5.0.2 Inter-frequency absolute RSSI measurement accuracy requirements in FR1 4144
11.6.5.1 NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA 4144
11.6.5.2 NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA 4147
11.6.5.3 NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA 4151
11.6.6 Channel occupancy 4155
11.6.6.0 Minimum Conformance Requirements 4155
11.6.6.0.1 Intra-frequency channel occupancy measurement accuracy requirements in FR1 4155
11.6.6.0.2 Inter-frequency channel occupancy measurement accuracy requirements in FR1 4155
11.6.6.1 NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA 4155
11.6.6.2 NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA 4159
11.6.6.3 NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA 4163

12 E-UTRA Standalone Tests with at Least One NR Cell under CCA 4167
12.1 RRC_IDLE State Mobility 4167
12.1.1 Inter-RAT cell re-selection to NR on a carrier frequency with CCA 4167
12.1.1.0 Minimum Conformance Requirements 4167
12.1.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA 4168
12.2 RRC_CONNECTED State Mobility 4174
12.2.1 Handover 4174
12.2.1.0 Minimum Conformance Requirements 4174
12.2.1.1 E-UTRAN - NR with CCA handover with known target cell 4176
12.3 Void 4181
12.4 Measurement Procedure 4181
12.4.1 E-UTRAN-NR inter-RAT SFTD measurements 4181
12.4.1.0 Minimum Conformance Requirements 4181
12.4.1.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX 4182
12.4.2 E-UTRAN-NR inter-RAT measurements on NR carrier frequency under CCA 4187
12.4.2.0 Minimum Conformance Requirements 4187
12.4.2.0.1 E-UTRAN – NR measurements 4188
12.4.2.1 E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA 4191
12.4.2.2 E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA 4195
12.4.2.3 E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA 4200
12.4.2.4 E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA 4205
12.5 Measurement Performance 4211
12.5.1 E-UTRAN-NR SFTD 4211

12.5.1.0 Minimum conformance requirements 4211
12.5.1.1 E-UTRA - NR FR1 SFTD measurement accuracy under CCA 4212

13 NR Standalone Tests with NR SCell under CCA and All Other NR Cells in FR1 4216
13.1 Void 4216
13.2 Signalling Characteristics 4216
13.2.2 SCell activation and deactivation delay 4216
13.2.2.0 Minimum conformance requirements 4216
13.2.2.0.1 Minimum conformance requirements for SCell activation and deactivation delay 4216
13.2.2.1 NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle 4217
13.2.2.2 NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle 4224
13.2.2.3 NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA 4227
13.3 Measurement Procedure 4231
13.3.1 Intra-frequency measurements 4231
13.3.1.0 Minimum Conformance Requirements 4231
13.3.1.1 NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under non-DRX 4232
13.3.1.2 NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under DRX 4237
13.3.1.3 NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX 4242
13.3.1.4 NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX 4248
13.3.2 Inter-frequency measurements 4254
13.3.2.0 Minimum Conformance Requirements 4254
13.3.2.1 Void 4254
13.3.2.2 Void 4254
13.3.2.3 NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is not used 4254
13.3.2.4 NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used 4260
13.3.2.5 NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is not used 4266
13.3.2.6 NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used 4271
13.3.3 L1-RSRP measurement for beam reporting for SCell under CCA 4277
13.3.3.0 Minimum Conformance Requirements 4277
13.3.3.1 NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used 4277
13.3.3.2 NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used 4282
13.4 Measurement Peformance 4288
13.4.1 SS-RSRP 4288
13.4.1.0 Minimum Conformance Requirements 4288
13.4.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements under CCA 4288
13.4.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements under CCA 4288
13.4.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements under CCA 4288
13.4.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements under CCA 4288
13.4.1.1 NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA 4288
13.4.2 SS-RSRQ 4292
13.4.2.0 Minimum Conformance Requirements 4292
13.4.2.0.1 Intra-frequency absolute SS-RSRQ measurement accuracy requirements under CCA 4292
13.4.2.0.2 Void 4293
13.4.2.0.3 Inter-frequency absolute SS-RSRQ measurement accuracy requirements under CCA 4293
13.4.2.0.4 Inter-frequency relative SS-RSRQ measurement accuracy requirements under CCA 4293
13.4.2.1 NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA 4293
13.4.3 SS-SINR 4300
13.4.3.0 Minimum Conformance Requirements 4300
13.4.3.0.1 Intra-frequency absolute SS-SINR measurement accuracy requirements under CCA 4300
13.4.3.0.2 Intra-frequency relative SS-SINR measurement accuracy requirements under CCA 4300
13.4.3.0.3 Inter-frequency absolute SS-SINR measurement accuracy requirements under CCA 4300
13.4.3.0.4 Inter-frequency relative SS-SINR measurement accuracy requirements under CCA 4300
13.4.3.1 NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA 4300
13.4.4 L1-RSRP measurement for beam reporting with CCA serving cell 4307
13.4.4.0 Minimum Conformance Requirements 4307

13.4.4.0.1 SSB-based L1-RSRP measurement absolute accuracy under CCA 4307
13.4.4.0.2 SSB-based L1-RSRP measurement relative accuracy under CCA....4307
13.4.4.1 NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA 4307
13.4.5 RSSI....4313
13.4.5.0 Minimum Conformance Requirements....4313
13.4.5.0.1 Intra-frequency absolute RSSI measurement accuracy requirements in FR1....4313
13.4.5.0.2 Inter-frequency absolute RSSI measurement accuracy requirements in FR1....4313
13.4.5.0.3 RSSI measurement report mapping....4313
13.4.5.1 NR SA FR1 RSSI measurement accuracy on a carrier with CCA 4314
13.4.5.2 NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA 4318
13.4.6 Channel Occupancy....4322
13.4.6.0 Minimum Conformance Requirements....4322
13.4.6.0.1 Intra-frequency channel occupancy measurement accuracy requirements in FR1 4322
13.4.6.0.2 Inter-frequency channel occupancy measurement accuracy requirements in FR1 4322
13.4.6.1 NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA 4322
13.4.6.2 NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA 4326

14 NR standalone tests for Satellite access 4330
14.0 General 4330
14.0.1 Principle of testing GSO and NGSO scenarios....4330
14.0.2 Principle of testing different RRM requirements....4331
14.0.3 Principle of testing different ephemeris formats....4331
14.0.4 General setup for SIB19 4333
14.0.5 Initial test environment conditions for RRM NTN tests....4333
14.1 RRC_IDLE state mobility....4333
14.1.0 Minimum conformance requirements....4333
14.1.0.1 Measurements of intra-frequency NR cells....4333
14.1.0.2 Measurements of inter-frequency NR cells....4336
14.1.1 NR SA FR1 Cell Reselection for Satellite Access....4339
14.1.2 NR SA FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access....4343
14.1.3 NR SA FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access....4348
14.1.4 NR SA FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access 4352
14.1.5 NR SA FR1-FR1 Cell Reselection for Satellite Access....4355
14.1.6 NR SA FR1-FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access....4360
14.1.7 NR SA FR1-FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access....4363
14.1.8 NR SA FR1-FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access 4367
14.1.9 NR SA FR1-FR1 Cell reselection for UE fulfilling low mobility relaxed measurement criterion for Satellite Access....4371
14.1.10 NR SA FR1-FR1 Cell reselection for UE fulfilling not-at-cell edge relaxed measurement criterion for Satellite Access 4377
14.2 RRC_CONNECTED state mobility....4383
14.2.1 Handover for SAN....4383
14.2.1.0 Minimum conformance requirements 4383
14.2.1.0.1 Minimum conformance requirements for handover 4383
14.2.1.0.2 Minimum conformance requirements for conditional handover 4384
14.2.1.1 NR SA FR1 Handover for Satellite Access....4386
14.2.1.2 NR SA FR1-FR1 Handover for Satellite Access 4389
14.2.1.3 NR SA FR1 Time-based Conditional Handover for Satellite Access 4393
14.2.1.4 NR SA FR1-FR1 Time-based Conditional Handover for NR Satellite Access 4399
14.2.1.5 NR SA FR1 Distance-based Conditional Handover for Satellite Access....4406
14.2.1.6 NR SA FR1-FR1 Distance-based Conditional Handover for Satellite Access 4410
14.2.2 RRC Connection Mobility Control for SAN 4413
14.2.2.1 RRC Re-establishment for SAN 4413
14.2.2.1.0 Minimum conformance requirements for RRC Re-establishment for Satellite Access....4414
14.2.2.1.1 NR SA FR1 RRC Re-establishment for Satellite Access 4415
14.2.2.1.2 NR SA FR1-FR1 RRC Re-establishment for Satellite Access 4419
14.2.2.4 NR SA FR1 RACH-based Hard Satellite switching with re-synchronization for Satellite Access...4423
14.2.2.5 NR SA FR1 RACH-less Soft Satellite switching with re-synchronization for Satellite Access 4427
14.3 Timing for Satellite Access 4432
14.3.1 UE transmit timing for Satellite Access....4432

14.3.1.0 Minimum conformance requirements 4432
14.3.1.1 NR SA FR1 UE transmit timing accuracy for Satellite Access 4434
14.3.2 Timing Advance for Satellite Access....4439
14.3.2.0 Minimum conformance requirements 4439
14.3.2.1 NR SA FR1 Timing Advance adjustment accuracy for Satellite Access....4440
14.4 Signalling characteristics....4445
14.4.1 Radio link monitoring for Satellite Access 4445
14.4.1.0 General....4445
14.4.1.0.1 Minimum conformance requirements for SSB based Radio Link Monitoring for Satellite Access....4446
14.4.1.0.2 Minimum conformance requirements for CSI-RS based Radio Link Monitoring for Satellite Access....4447
14.4.1.1 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access 4450
14.4.1.2 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access 4455
14.4.1.3 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access 4460
14.4.1.4 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access 4465
14.4.1.5 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access 4470
14.4.1.6 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access 4475
14.4.1.7 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access....4480
14.4.1.8 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access 4484
14.4.2 Beam Failure Detection and Link recovery procedures for satellite access....4489
14.4.2.00 General....4489
14.4.2.0 Minimum conformance requirements 4490
14.4.2.0.1 Minimum conformance requitements for SSB based beam failure detection....4490
14.4.2.0.2 Measurement restriction for SSB based beam failure detection 4491
14.4.2.0.3 Minimum conformance requitements for CSI-RS based beam failure detection 4491
14.4.2.0.4 Measurement restriction for CSI-RS based beam failure detection....4493
14.4.2.0.5 Minimum requirement for L1 indication 4493
14.4.2.0.6 Minimum conformance requitements for SSB based candidate beam detection....4494
14.4.2.0.7 Measurement restriction for SSB based candidate beam detection 4495
14.4.2.0.8 Minimum conformance requitements for CSI-RS based candidate beam detection 4495
14.4.2.0.9 Measurement restriction for CSI-RS based candidate beam detection....4496
14.4.2.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in non-DRX mode for Satellite Access....4497
14.4.2.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in DRX mode for Satellite Access....4504
14.4.2.3 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with CSI-RS-based BFD and LR in non-DRX mode for Satellite Access....4510
14.4.2.4 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with CSI-RS-based BFD and LR in DRX mode for Satellite Access....4516
14.4.3 Active BWP Switch for SAN 4523
14.4.3.1 DCI-based and Timer-based Active BWP Switch 4523
14.4.3.1.0 Minimum conformance requirements....4523
14.4.3.1.1 NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access 4524
14.4.3.2 RRC-based Active BWP Switch....4531
14.4.3.2.0 Minimum conformance requirements....4531
14.4.3.2.1 NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access....4532
14.4.4 UE specific CBW change for SAN....4538
14.4.4.0 Minimum conformance requirements 4538
14.4.4.1 NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access....4538
14.5 Measurement procedure 4543
14.5.1 Intra-frequency Measurements for SAN....4543
14.5.1.0 Minimum conformance requirements 4543

14.5.1.0.1 Minimum conformance requitements for intra-frequency measurements without measurement gaps 4543
14.5.1.0.2 Minimum conformance requitements for intra-frequency measurements with measurement gaps....4546
14.5.1.1 NR SA FR1 Event-triggered reporting tests without gap under non-DRX for NR satellite access ..4548
14.5.1.2 NR SA FR1 Event triggered reporting tests without gap under DRX for NR satellite access 4551
14.5.1.3 NR SA FR1 event triggered reporting tests without gap under non-DRX with FDD PCell with SSB index reading for NR satellite access 4555
14.5.1.4 NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access 4559
14.5.1.5 NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is used with two concurrent fully non-overlapped (FNO) gaps for satellite access 4562
14.5.1.6 NR SA FR1 Event-triggered reporting with SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access 4567
14.5.2 Inter-frequency Measurements for SAN....4571
14.5.2.0 Minimum conformance requirements 4571
14.5.2.1 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access....4574
14.5.2.2 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access 4578
14.5.2.3 NR SA FR1-FR1 Event-triggered reporting with SSB time index detection when DRX is not used with single gap for satellite access....4583
14.5.2.4 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access....4587
14.5.2.5 Void....4591
14.5.2.6 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access....4591
14.5.2.7 NR SA FR1-FR1 Event triggered reporting without gap under non-DRX for Satellite Access 4595
14.5.2.8 NR SA FR1-FR1 Event triggered reporting without gap under DRX for Satellite Access....4599
14.5.3 L1-RSRP measurement for beam reporting for SAN 4603
14.5.3.0 Minimum conformance requirements 4603
14.5.3.0.1 Minimum conformance requirements for SSB based L1-RSRP measurement for beam reporting 4603
14.5.3.0.2 Minimum conformance requirements for CSI-RS based L1-RSRP measurement for beam reporting 4604
14.5.3.1 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for Satellite Access....4606
14.5.3.2 NR SA FR1 SSB based L1-RSRP measurement when DRX is used for Satellite Access....4609
14.5.3.3 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for Satellite Access 4612
14.5.3.4 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for Satellite Access 4615
14.6 Measurement Performance Requirements....4618
14.6.1 SS-RSRP for SAN....4618
14.6.1.0 Minimum conformance requirements 4618
14.6.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements for FR1 SAN 4618
14.6.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements for FR1 SAN....4619
14.6.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements for FR1 SAN 4619
14.6.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements for FR1 SAN....4620
14.6.1.1 NR SA FR1 SS-RSRP measurement accuracy for Satellite Access....4620
14.6.1.2 NR SA FR1-FR1 SS-RSRP measurement accuracy for Satellite Access 4624
14.6.2 SS-RSRQ for SAN 4628
14.6.2.0 Minimum conformance requirements 4628
14.6.2.0.1 Intra-frequency absolute SS-RSRQ measurement accuracy requirements for FR1 SAN....4628
14.6.2.0.2 Inter-frequency absolute SS-RSRQ measurement accuracy requirements for FR1 SAN....4629
14.6.2.0.3 Inter-frequency relative SS-RSRQ measurement accuracy requirements for FR1 SAN....4629
14.6.2.1 NR SA FR1 SS-RSRQ measurement accuracy for Satellite Access....4630
14.6.2.2 NR SA FR1-FR1 SS-RSRQ measurement accuracy for Satellite Access....4633
14.6.3 SS-SINR Requirements for SAN....4637
14.6.3.0 Minimum conformance requirements 4637
14.6.3.0.1 Intra-Frequency SS-SINR accuracy requirements in FR1....4637
14.6.3.0.2 Inter-Frequency SS-SINR accuracy requirements in FR1....4638
14.6.3.1 NR SA FR1 SS-SINR Measurement Accuracy for Satellite Access....4639
14.6.3.2 NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access....4644
14.6.4 L1-RSRP Beam Reporting Measurement Requirements for SAN 4648

14.6.4.0 Minimum conformance requirements 4648
14.6.4.0.1 Minimum conformance requirements for SSB based L1-RSRP Reporting....4649
14.6.4.0.2 Minimum conformance requirements for CSI-RS based L1-RSRP Reporting 4650
14.6.4.1 NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access....4652
14.6.4.2 NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access....4656

15 FFS 4660

16 NR standalone tests in FR1 for RedCap....4661
16.0 General 4661
16.1 RRC_IDLE state mobility 4661
16.1.1 NR cell re-selection for RedCap 4661
16.1.1.0 Minimum conformance requirements 4661
16.1.1.0.1 Minimum conformance requirements for intra-frequency cell re-selection for RedCap 4661
16.1.1.0.2 Minimum conformance requirements for inter-frequency cell re-selection for RedCap 4663
16.1.1.0.3 Minimum conformance requirements for intra-frequency cell re-selection for RedCap UE configured with stationary relaxed measurement criterion 4666
16.1.1.0.4 Minimum conformance requirements for inter-frequency cell re-selection for RedCap UE configured with stationary relaxed measurement criterion 4669
16.1.1.1 NR SA FR1 Cell reselection for 1 Rx UE 4672
16.1.1.2 NR SA FR1 Cell reselection for 2 Rx UE 4677
16.1.1.3 NR SA FR1-FR1 Cell reselection for 1 Rx UE 4682
16.1.1.4 NR SA FR1-FR1 Cell reselection for 2 Rx UE 4686
16.1.1.5 NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE 4689
16.1.1.6 NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE 4695
16.1.1.7 NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE 4699
16.1.1.8 NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE 4707
16.1.2 NR – E-UTRA cell re-selection for RedCap 4714
16.1.2.0 Minimum conformance requirements 4714
16.1.2.0.1 Minimum conformance requirements for NR SA FR1 - E-UTRA cell re-selection for 1 Rx 4714
16.1.2.0.2 Minimum conformance requirements for NR SA FR1 - E-UTRA cell re-selection for 2 Rx 4716
16.1.2.0.3 Minimum conformance requirements for NR SA FR1 - E-UTRA cell re-selection 4716
16.1.2.1 NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 1 Rx UE 4718
16.1.2.2 NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 2 Rx UE 4723
16.1.2.3 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 1 Rx UE 4727
16.1.2.4 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 2 Rx UE 4732
16.1.2.5 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE 4736
16.1.2.6 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE 4742
16.2 RRC_INACTIVE state mobility for RedCap 4746
16.2.1 Configured Grant based Small Data Transmissions for RedCap 4746
16.2.1.0 Minimum conformance requirements 4746
16.2.1.0.1 Minimum conformance requirements for TA validation using CG-SDT 4746
16.2.1.1 NR SA FR1 CG-SDT for 1 Rx UE 4747
16.2.1.2 NR SA FR1 CG-SDT for 2 Rx UE 4750
16.3 RRC_CONNECTED state mobility for RedCap 4753
16.3.1 Handover for RedCap 4753
16.3.1.0 Minimum conformance requirements 4753
16.3.1.0.1 Minimum conformance requirements for NR – E-UTRAN handover 4753
16.3.1.0.2 Minimum conformance requirements for NR FR1 – NR FR1 handover 4753
16.3.1.1 NR SA FR1 handover with known target cell for 1 Rx UE 4754
16.3.1.2 NR SA FR1 handover with known target cell for 2 Rx UE 4757
16.3.1.3 NR SA FR1 handover with unknown target cell for 1 Rx UE 4759
16.3.1.4 NR SA FR1 handover with unknown target cell for 2 Rx UE 4765
16.3.1.5 NR SA FR1-FR1 handover with unknown target cell for 1 Rx UE 4770
16.3.1.6 NR SA FR1-FR1 handover with unknown target cell for 2 Rx UE 4775
16.3.1.7 NR SA FR1 - E-UTRA handover with known target cell for 1 Rx UE 4781

16.3.1.8 NR SA FR1 - E-UTRA handover with known target cell for 2 Rx UE 4785
16.3.1.9 NR SA FR1 - E-UTRA handover with unknown target cell for 1 Rx UE 4789
16.3.1.10 NR SA FR1 - E-UTRA handover with unknown target cell for 2 Rx UE 4792
16.3.2 RRC connection mobility control for RedCap....4796
16.3.2.1 RRC re-establishment for RedCap....4796
16.3.2.1.0 Minimum conformance requirements....4796
16.3.2.1.1 NR SA FR1 RRC Re-establishment for 1 Rx UE 4796
16.3.2.1.2 NR SA FR1 RRC Re-establishment for 2 Rx UE 4799
16.3.2.1.3 NR SA FR1-FR1 RRC Re-establishment for 1 Rx UE 4802
16.3.2.1.4 NR SA FR1-FR1 RRC Re-establishment for 2 Rx UE 4804
16.3.2.1.5 NR SA FR1 RRC Re-establishment for 1 Rx UE without serving cell timing....4807
16.3.2.1.6 NR SA FR1 RRC Re-establishment for 2 Rx UE without serving cell timing....4809
16.3.2.2 Random access for RedCap....4812
16.3.2.2.0 Minimum conformance requirements....4812
16.3.2.2.1 NR SA FR1 4-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE 4812
16.3.2.2.2 NR SA FR1 4-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE 4815
16.3.2.2.3 NR SA FR1 4-step RA type non-contention based random access test in FR1 for NR standalone for 1 Rx UE 4818
16.3.2.2.4 NR SA FR1 4-step RA type non-contention based random access test in FR1 for NR standalone for 2 Rx UE 4820
16.3.2.2.5 NR SA FR1 2-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE 4823
16.3.2.2.6 NR SA FR1 2-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE 4826
16.3.2.2.7 NR SA FR1 2-step RA type non-contention based test in FR1 for NR standalone for 1 RX UE....4829
16.3.2.2.8 NR SA FR1 2-step RA type non-contention based test in FR1 for NR standalone for 2 RX UE....4831
16.3.2.3 RRC connection release with redirection for RedCap 4833
16.3.2.3.0 Minimum conformance requirements....4833
16.3.2.3.1 NR SA FR1-FR1 RRC connection release with redirection for 1 Rx UE 4834
16.3.2.3.2 NR SA FR1-FR1 RRC connection release with redirection for 2 Rx UE 4837
16.3.2.3.3 NR SA FR1 - E-UTRA RRC connection release with redirection for 1 Rx UE....4840
16.3.2.3.4 NR SA FR1 - E-UTRA RRC connection release with redirection for 2 Rx UE....4843
16.4 Timing for RedCap....4847
16.4.1 UE transmit timing for RedCap 4847
16.4.1.0 Minimum conformance requirements 4847
16.4.1.1 NR SA FR1 NR UE Transmit Timing accuracy for 1 Rx UE....4848
16.4.1.2 NR SA FR1 NR UE Transmit Timing accuracy for 2 Rx UE....4851
16.4.2 4853
16.4.3 Timing advance for RedCap 4853
16.4.3.0 Minimum conformance requirement....4853
16.4.3.1 NR SA FR1 timing advance adjustment accuracy for 1 Rx UE....4854
16.4.3.2 NR SA FR1 timing advance adjustment accuracy for 2 Rx UE....4857
16.5 Signalling characteristics for RedCap 4860
16.5.1 Radio link monitoring for RedCap 4860
16.5.1.0 Minimum requirements....4860
16.5.1.0.1 General 4860
16.5.1.0.2 Minimum conformance requirements for SSB-based RLM....4863
16.5.1.0.3 Minimum conformance requirements for CSI-RS based RLM....4864
16.5.1.1 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE....4865
16.5.1.2 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE....4868
16.5.1.3 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE....4871
16.5.1.4 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE....4874
16.5.1.5 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE 4877

16.5.1.6 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE 4880
16.5.1.7 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE 4884
16.5.1.8 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE 4887
16.5.1.9 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE 4890
16.5.1.10 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE 4893
16.5.1.11 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE 4895
16.5.1.12 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE 4898
16.5.1.13 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE 4901
16.5.1.14 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE 4904
16.5.1.15 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE 4906
16.5.1.16 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE 4909
16.5.2 Beam Failure Detection and Link recovery procedures for RedCap 4912
16.5.2.0 Minimum requirements 4912
16.5.2.0.1 General 4912
16.5.2.0.2 Minimum conformance requirements for SSB-based BFD and CBD 4914
16.5.2.0.3 Minimum conformance requirements for CSI-RS based RLM 4916
16.5.2.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 1 Rx UE 4918
16.5.2.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE 4922
16.5.2.3 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 1 Rx UE 4925
16.5.2.4 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE 4929
16.5.2.5 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 1 Rx UE 4933
16.5.2.6 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE 4937
16.5.2.7 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 1 Rx UE 4940
16.5.2.8 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE 4943
16.5.3 Active BWP switch delay for RedCap 4946
16.5.3.1 DCI-based and timer-based active BWP switch for RedCap 4946
16.5.3.1.0 Minimum conformance requirements 4946
16.5.3.1.1 NR SA FR1 DCI-based DL active BWP switch in non-DRX for 1 Rx UE 4948
16.5.3.1.2 NR SA FR1 DCI-based DL active BWP switch in non-DRX for 2 Rx UE 4952
16.5.3.2 RRC-based active BWP switch for RedCap 4955
16.5.3.2.0 Minimum conformance requirements 4955
16.5.3.2.1 NR SA FR1 RRC-based DL active BWP switch in non-DRX for 1 Rx UE 4956
16.5.3.2.2 NR SA FR1 RRC-based DL active BWP switch in non-DRX for 2 Rx UE 4959
16.5.4 UE specific CBW change for RedCap 4963
16.5.4.0 Minimum conformance requirements 4963
16.5.4.0.1 Minimum conformance requirements for UE specific CBW change 4963
16.5.4.1 NR SA FR1 UE specific CBW change on PCell in non-DRX for 1 Rx UE 4963
16.5.4.2 NR SA FR1 UE specific CBW change on PCell in non-DRX for 2 Rx UE 4966
16.6 Measurement procedures for RedCap 4968
16.6.1 Intra-frequency measurements for RedCap 4968
16.6.1.0 Minimum conformance requirements 4968
16.6.1.0.1 General 4968
16.6.1.0.2 Minimum conformance requirements for event-triggered measurement without gap 4970

16.6.1.0.3 Minimum conformance requirements for event-triggered measurement with gap 4972
16.6.1.1 NR SA FR1 Event triggered reporting tests without gap under non-DRX for 1 Rx UE 4973
16.6.1.2 NR SA FR1 Event triggered reporting tests without gap under non-DRX for 2 Rx UE 4978
16.6.1.3 NR SA FR1 Event triggered reporting tests without gap under DRX for 1 Rx UE 4983
16.6.1.4 NR SA FR1 Event triggered reporting tests without gap under DRX for 2 Rx UE 4986
16.6.1.5 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX for 1 Rx UE 4988
16.6.1.6 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX for 2 Rx UE 4991
16.6.1.7 NR SA FR1 Event triggered reporting tests with per-UE gaps under DRX for 1 Rx UE 4994
16.6.1.8 NR SA FR1 Event triggered reporting tests with per-UE gaps under DRX for 2 Rx UE 4996
16.6.1.9 NR SA FR1 Event triggered reporting tests without gap under non-DRX with SSB index reading for 1 Rx UE 4999
16.6.1.10 NR SA FR1 Event triggered reporting tests without gap under non-DRX with SSB index reading for 2 Rx UE 5004
16.6.1.11 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 1 Rx UE 5009
16.6.1.12 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 2 Rx UE 5012
16.6.2 Inter-frequency measurements for RedCap 5014
16.6.2.0 Minimum conformance requirements 5014
16.6.2.0.1 Minimum conformance requirements for inter-frequency event-triggered measurement with measurement gaps 5014
16.6.2.0.2 Minimum conformance requirements for inter-frequency event-triggered measurements without measurement gaps 5016
16.6.2.1 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE 5019
16.6.2.2 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE 5023
16.6.2.3 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used for 1 Rx UE 5027
16.6.2.4 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used for 2 Rx UE 5031
16.6.2.5 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 1 Rx UE 5034
16.6.2.6 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 2 Rx UE 5038
16.6.2.7 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 1 Rx UE 5041
16.6.2.8 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 2 Rx UE 5044
16.6.2.9 NR SA FR1-FR1 Event triggered reporting tests with additional mandatory gap pattern for 1 Rx UE 5048
16.6.2.10 NR SA FR1-FR1 Event triggered reporting tests with additional mandatory gap pattern for 2 Rx UE 5052
16.6.2.11 NR SA FR1-FR1 Event triggered reporting tests for FR1 when DRX is used for 1 Rx UE 5056
16.6.2.12 NR SA FR1-FR1 Event triggered reporting tests for FR1 when DRX is used for 2 Rx UE 5059
16.6.3 Inter-RAT measurements for RedCap 5063
16.6.3.0 Minimum conformance requirements 5063
16.6.3.0.1 Minimum conformance requirements for inter-RAT event triggered reporting to E-UTRAN FDD 5063
16.6.3.0.2 Minimum conformance requirements for inter-RAT event triggered reporting to E-UTRAN TDD 5066
16.6.3.1 NR - E-UTRA event-triggered reporting in non-DRX for 1 Rx UE 5069
16.6.3.2 NR - E-UTRA event-triggered reporting in non-DRX for 2 Rx UE 5074
16.6.3.3 NR - E-UTRA event-triggered reporting in DRX for 1 Rx UE 5078
16.6.3.4 NR - E-UTRA event-triggered reporting in DRX for 2 Rx UE 5083
16.6.4 L1-RSRP measurement for beam reporting for RedCap 5088
16.6.4.0 Minimum conformance requirements 5088
16.6.4.0.1 General 5088
16.6.4.1 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for 1 Rx UE 5093
16.6.4.2 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for 2 Rx UE 5096
16.6.4.3 NR SA FR1 SSB based L1-RSRP measurement when DRX is used for 1 Rx UE 5098
16.6.4.4 NR SA FR1 SSB based L1-RSRP measurement when DRX is used for 2 Rx UE 5101

16.6.4.5 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for 1 Rx UE 5104
16.6.4.6 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for 2 Rx UE 5107
16.6.4.7 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for 1 Rx UE 5109
16.6.4.8 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for 2 Rx UE 5112
16.6.5 NR measurements with autonomous gaps for RedCap 5114
16.6.5.0 Minimum conformance requirements 5114
16.6.5.0.1 Minimum conformance requirements for NR SA FR1 intra-frequency CGI identification of NR neighbour cell in FR1 for 1 Rx UE 5114
16.6.5.0.2 Minimum conformance requirements for NR SA FR1 intra-frequency CGI identification of NR neighbour cell in FR1 for 2 Rx UE 5116
16.6.5.0.3 Minimum conformance requirements for CGI identification of an E-UTRA cell with autonomous gaps 5116
16.6.5.1 NR SA FR1 CGI identification of NR neighbour cell for 1 Rx UE 5117
16.6.5.2 NR SA FR1 CGI identification of NR neighbour cell for 2 Rx UE 5121
16.6.5.3 NR SA FR1 - E-UTRA CGI Identification of E-UTRA cell for 1 Rx UE 5123
16.6.5.4 NR SA FR1 - E-UTRA CGI Identification of E-UTRA cell for 2 Rx UE 5130
16.7 Measurement performance requirements for RedCap 5134
16.7.1 SS-RSRP for RedCap 5134
16.7.1.0 Minimum conformance requirements 5134
16.7.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements 5134
16.7.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements 5135
16.7.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements 5136
16.7.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements 5137
16.7.1.1 Intra-frequency measurements for RedCap for 1 Rx UE 5138
16.7.1.1.1 NR SA FR1 SS-RSRP absolute measurement accuracy for 1 Rx UE 5138
16.7.1.1.2 NR SA FR1 SS-RSRP relative measurement accuracy for 1 Rx UE 5142
16.7.1.2 Intra-frequency measurements for RedCap for 2 Rx UE 5144
16.7.1.2.1 NR SA FR1 SS-RSRP absolute measurement accuracy for 2 Rx UE 5144
16.7.1.2.2 NR SA FR1 SS-RSRP relative measurement accuracy for 2 Rx UE 5149
16.7.1.3 Inter-frequency measurements for RedCap for 1 Rx UE 5151
16.7.1.3.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for 1 Rx UE 5151
16.7.1.3.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy for 1 Rx UE 5156
16.7.1.4 Inter-frequency measurements for RedCap for 2 Rx UE 5157
16.7.1.4.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for 2 Rx UE 5157
16.7.1.4.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy for 2 Rx UE 5161
16.7.2 SS-RSRQ for RedCap 5163
16.7.2.0 Minimum conformance requirements 5163
16.7.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements 5163
16.7.2.0.2 Inter-frequency SS-RSRQ absolute measurement accuracy requirements 5164
16.7.2.0.3 Inter-frequency SS-RSRQ relative measurement accuracy requirements 5164
16.7.2.1 NR SA FR1 SS-RSRQ absolute measurement accuracy for 1 Rx UE 5165
16.7.2.2 NR SA FR1 SS-RSRQ absolute measurement accuracy for 2 Rx UE 5168
16.7.2.3 Inter-frequency measurement accuracy for 1 Rx UE 5171
16.7.2.3.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for 1 Rx UE 5171
16.7.2.3.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for 1 Rx UE 5174
16.7.2.4 Inter-frequency measurement accuracy for 2 Rx UE 5176
16.7.2.4.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for 2 Rx UE 5176
16.7.2.4.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for 2 Rx UE 5178
16.7.3 SS-SINR for RedCap 5180
16.7.3.0 Minimum conformance requirements 5180
16.7.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements 5180
16.7.3.0.2 Inter-frequency SS-SINR absolute measurement accuracy requirements 5181
16.7.3.0.3 Inter-frequency SS-SINR relative measurement accuracy requirements 5181
16.7.3.1 NR SA FR1 SS-SINR absolute measurement accuracy for 1 Rx UE 5182
16.7.3.2 NR SA FR1 SS-SINR absolute measurement accuracy for 2 Rx UE 5185
16.7.3.3 Inter-frequency measurement accuracy for 1 Rx UE 5188
16.7.3.3.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy for 1 Rx UE 5188
16.7.3.3.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy for 1 Rx UE 5190
16.7.3.4 Inter-frequency measurement accuracy for 2 Rx UE 5192
16.7.3.4.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy for 2 Rx UE 5192
16.7.3.4.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy for 2 Rx UE 5195
16.7.4 L1-RSRP measurement for beam reporting for RedCap 5196

16.7.4.0 Minimum conformance requirements 5196
16.7.4.0.1 SSB based absolute L1-RSRP measurement accuracy requirements 5196
16.7.4.0.2 SSB based relative L1-RSRP measurement accuracy requirements 5197
16.7.4.0.3 CSI-RS based absolute L1-RSRP measurement accuracy requirements 5198
16.7.4.1 SSB based L1-RSRP measurements for 1 Rx UE 5199
16.7.4.1.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for 1 Rx UE 5199
16.7.4.1.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy for 1 Rx UE 5203
16.7.4.2 SSB based L1-RSRP measurements for 2 Rx UE 5205
16.7.4.2.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for 2 Rx UE 5205
16.7.4.2.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy for 2 Rx UE 5209
16.7.4.3 CSI-RS based L1-RSRP measurements for 1 Rx UE 5210
16.7.4.3.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for 1 Rx UE 5210
16.7.4.3.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for 1 Rx UE 5214
16.7.4.4 CSI-RS based L1-RSRP measurements for 2 Rx UE 5216
16.7.4.4.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for 2 Rx UE 5216
16.7.4.4.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for 2 Rx UE 5220
16.7.5 E-UTRAN RSRP for RedCap 5222
16.7.5.0 Minimum conformance requirements 5222
16.7.5.0.1 E-UTRAN RSRP absolute accuracy 5222
16.7.5.1 NR SA FR1 - E-UTRA RSRP absolute measurement accuracy for 1 Rx UE 5222
16.7.5.2 NR SA FR1 - E-UTRA RSRP absolute measurement accuracy for 2 Rx UE 5226
16.7.6 E-UTRAN RSRQ for RedCap 5230
16.7.6.0 Minimum conformance requirements 5230
16.7.6.0.1 E-UTRAN RSRQ absolute accuracy 5230
16.7.6.1 NR SA FR1 - E-UTRA RSRQ absolute measurement accuracy for 1 Rx UE 5231
16.7.6.2 NR SA FR1 - E-UTRA RSRQ absolute measurement accuracy for 2 Rx UE 5234

17 NR standalone tests in FR2 for RedCap 5238
17.1 RRC_IDLE state mobility for RedCap 5238
17.1.1 NR cell re-selection for RedCap 5238
17.1.1.0 Minimum conformance requirements 5238
17.1.1.0.1 Minimum conformance requirements for intra-frequency cell re-selection for RedCap 5238
17.1.1.0.2 Minimum conformance requirements for inter-frequency cell re-selection for RedCap 5240
17.1.1.0.3 Minimum conformance requirements for intra-frequency cell re-selection for RedCap UE configured with stationary relaxed measurement criterion 5242
17.1.1.0.4 Minimum conformance requirements for inter-frequency cell re-selection for RedCap UE configured with stationary relaxed measurement criterion 5244
17.1.1.1 NR SA FR2 Cell reselection for 2 Rx UE 5245
17.1.1.2 NR SA FR2-FR2 Cell reselection for 2 Rx UE 5250
17.1.1.3 NR SA FR2 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE 5255
17.1.1.4 NR SA FR2-FR2 Cell reselection for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE 5260
17.2 RRC_INACTIVE state mobility for RedCap 5266
17.2.1 Configured Grant based Small Data Transmissions for RedCap 5266
17.2.1.0 Minimum conformance requirements 5266
17.2.1.0.1 Minimum conformance requirements for TA validation using CG-SDT 5266
17.2.1.1 NR SA FR2 TA validation for CG-SDT for 2 Rx UE 5267
17.3 RRC_CONNECTED state mobility for RedCap 5270
17.3.1 Handover for RedCap 5270
17.3.1.0 Minimum conformance requirements 5270
17.3.1.0.1 Minimum conformance requirements for NR FR2 – NR FR2 handover 5270
17.3.1.1 NR SA FR2 handover with unknown target cell for 2 Rx UE 5271
17.3.1.2 NR SA FR2-FR2 handover with unknown target cell for 2 Rx UE 5274
17.3.2 RRC connection mobility control for RedCap 5279
17.3.2.1 RRC re-establishment for RedCap 5279
17.3.2.1.0 Minimum conformance requirements 5279
17.3.2.1.1 NR SA FR2 Intra-frequency RRC Re-establishment in FR2 5279
17.3.2.1.2 NR SA FR2-FR2 Inter-frequency RRC Re-establishment in FR2 5281
17.3.2.1.3 NR SA FR2 RRC re-establishment without serving cell timing 5284
17.3.2.2 Random access for RedCap 5286
17.3.2.2.0 Minimum conformance requirements 5286

17.3.2.2.0.1 Minimum conformance requirements for Contention based random access 5286
17.3.2.2.0.2 Minimum conformance requirements for Non-Contention based random access 5286
17.3.2.2.1 NR SA FR2 4-step RA type contention based random access for 2 Rx UE....5286
17.3.2.2.2 NR SA FR2 4-step RA type non-contention based random access for 2 Rx UE....5289
17.3.2.2.3 NR SA FR2 2-step RA type contention based random access for 2 Rx UE....5291
17.3.2.2.4 NR SA FR2 2-step RA type non-contention based random access for 2 Rx UE....5294
17.3.2.3 RRC Connection Release with Redirection for RedCap....5296
17.3.2.3.0 Minimum conformance requirements....5296
17.3.2.3.0.1 Minimum conformance requirements for FR2-FR2 RRC connection release with redirection....5296
17.3.2.3.1 NR SA FR2-FR2 RRC connection release with redirection for 2 Rx UE....5296
17.4 Timing for RedCap....5299
17.4.1 UE transmit timing for RedCap....5299
17.4.1.0 Minimum Conformance Requirements....5299
17.4.1.0.1 Minimum conformance requirements for UE transmit timing accuracy....5299
17.4.1.1 NR SA FR2 NR UE Transmit Timing accuracy for 2 Rx UE....5300
17.4.2 UE timer accuracy for RedCap....5303
17.4.3 Timing advance for RedCap....5303
17.4.3.0 Minimum conformance requirements....5303
17.4.3.0.1 Minimum conformance requirements for timing advance adjustment accuracy....5303
17.4.3.1 NR SA FR2 timing advance adjustment accuracy for 2 Rx UE....5303
17.5 Signalling characteristics for RedCap....5306
17.5.1 Radio link monitoring for RedCap....5306
17.5.1.0 Minimum requirements....5306
17.5.1.0.1 General....5306
17.5.1.0.2 Minimum conformance requirements for SSB-based RLM....5310
17.5.1.0.3 Minimum conformance requirements for CSI-RS based RLM....5311
17.5.1.1 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE....5313
17.5.1.2 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE....5316
17.5.1.3 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE....5319
17.5.1.4 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE....5322
17.5.1.5 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE....5325
17.5.1.6 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE....5328
17.5.1.7 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE....5331
17.5.1.8 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE....5334
17.5.1.9 NR SA FR2 radio link monitoring UE scheduling restrictions for 2 Rx UE....5337
17.5.2 Beam Failure Detection and Link recovery procedures for RedCap....5339
17.5.2.0 Minimum conformance requirements....5339
17.5.2.0.1 Minimum conformance requirements for SSB-based BFD and link recovery procedures....5339
17.5.2.0.2 Minimum conformance requirements for CSI-RS-based BFD and link recovery procedures....5339
17.5.2.0.3 Scheduling availability of UE during beam failure detection and candidate beam detection....5339
17.5.2.1 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE....5339
17.5.2.2 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE....5343
17.5.2.3 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE....5346
17.5.2.4 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE....5349
17.5.2.5 NR SA FR2 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE....5352
17.5.3 Active BWP switch delay for RedCap....5355
17.5.3.1 DCI-based and time-based active BWP switch for RedCap....5355

17.5.3.1.0 Minimum conformance requirements for DCI-based and time-based active BWP switch 5355
17.5.3.1.1 NR SA FR2 DCI-based and Timer-based DL active BWP switch for 2 Rx UE 5356
17.5.3.2 RRC-based active BWP switch for RedCap 5362
17.5.3.2.0 Minimum conformance requirements for RRC-based active BWP switch 5362
17.5.3.2.1 NR SA FR2 RRC-based DL active BWP switch for 2 Rx UE 5363
17.5.4 Active TCI state switch delay for RedCap 5368
17.5.4.0 Minimum conformance requirements 5368
17.5.4.0.1 Known conditions for TCI state 5368
17.5.4.0.2 Minimum conformance requirements for MAC-CE based active TCI state switch 5368
17.5.4.0.3 Minimum conformance requirements for RRC based active TCI state switch.....5369
17.5.4.1 MAC-CE based active TCI state switch for RedCap 5369
17.5.4.2 RRC based active TCI state switch for RedCap.....5371
17.5.4.2.1 NR SA FR2 RRC-CE based active TCI state switch for a known TCI state for 2 Rx UE 5371
17.5.5 Uplink spatial relation switch delay for RedCap 5374
17.5.5.1 MAC-CE based Spatial Relation switch for RedCap.....5374
17.5.5.1.0 Minimum conformance requirements MAC-CE based uplink spatial relation switch delay.....5374
17.5.5.1.1 NR SA FR2 MAC-CE based spatial relation switch associated with known DL-RS for 2 Rx UE.....5375
17.5.5.2 RRC based spatial relation switch for RedCap 5377
17.5.5.2.0 Minimum conformance requirements RRC based uplink spatial relation switch delay 5377
17.5.5.2.1 NR SA FR2 RRC-based spatial relation switch associated with a known DL-RS for 2 Rx UE .5378
17.5.6 UE specific CBW change for RedCap.....5381
17.5.6.0 Minimum conformance requirements 5381
17.5.6.0.1 Minimum conformance requirements for UE specific CBW change 5381
17.5.6.1 NR SA FR2 UE specific CBW change on PCell for 2 Rx UE 5381
17.6 Measurement procedures for RedCap 5386
17.6.1 Intra-frequency measurements for RedCap 5386
17.6.1.0 Minimum conformance requirements 5386
17.6.1.0.1 General 5386
17.6.1.0.2 Minimum conformance requirements for event-triggered measurement without gap.....5387
17.6.1.0.3 Minimum conformance requirements for event-triggered measurement with gap.....5389
17.6.1.1 NR SA FR2 event triggered reporting without gap in non-DRX for 2 Rx UE.....5390
17.6.1.2 NR SA FR2 event triggered reporting without gap in DRX for 2 Rx UE.....5393
17.6.1.3 NR SA FR2 event triggered reporting with gap in non-DRX for 2 Rx UE.....5395
17.6.1.4 NR SA FR2 event triggered reporting with gap in DRX for 2 Rx UE.....5401
17.6.2 Inter-frequency measurements for RedCap 5404
17.6.2.0 Minimum conformance requirements 5404
17.6.2.1 NR SA FR2-FR2 event triggered reporting in non-DRX for 2 Rx UE 5406
17.6.2.2 NR SA FR2-FR2 event triggered reporting in DRX for 2 Rx UE.....5409
17.6.2.3 NR SA FR2-FR2 event triggered reporting with SSB time index detection in non-DRX for 2 Rx UE 5412
17.6.2.4 NR SA FR2-FR2 event triggered reporting with SSB time index detection in DRX for 2 Rx UE ...5415
17.6.3 L1-RSRP measurement for beam reporting for RedCap 5418
17.6.3.0 Minimum conformance requirements for L1-RSRP measurement for beam reporting 5418
17.6.3.0.1 Minimum conformance requirements for SSB-based L1-RSRP measurement for beam reporting 5418
17.6.3.0.2 Minimum conformance requirements for CSI-RS-based L1-RSRP measurement for beam reporting 5419
17.6.3.1 NR SA FR2 SSB based L1-RSRP measurement in non-DRX for 2 Rx UE 5419
17.6.3.2 NR SA FR2 SSB based L1-RSRP measurement in DRX for 2 Rx UE 5420
17.6.3.3 NR SA FR2 CSI-RS based L1-RSRP measurement in non-DRX for 2 Rx UE.....5422
17.6.3.4 NR SA FR2 CSI-RS based L1-RSRP measurement in DRX for 2 Rx UE 5425
17.6.4 NR Measurements with autonomous gaps for RedCap 5427
17.6.4.0 Minimum conformance requirements 5427
17.6.4.0.1 Minimum conformance requirements for CGI identification of an NR cell with autonomous gaps.....5427
17.6.4.1 NR SA FR2-FR2 CGI identification of NR neighbour cell for 2 Rx UE.....5428
17.7 Measurement performance requirements for RedCap 5434
17.7.1 SS-RSRP for RedCap 5434
17.7.1.0 Minimum conformance requirements 5434
17.7.1.0.1 Intra-frequency SS-RSRP measurement accuracy requirements.....5434
17.7.1.0.2 Inter-frequency SS-RSRP measurement accuracy requirements.....5434

17.7.1.1 NR SA FR2 SS-RSRP measurement accuracy for 2 Rx UE 5434
17.7.1.2 NR SA FR2-FR2 SS-RSRP measurement accuracy for 2 Rx UE 5438
17.7.2 SS-RSRQ for RedCap 5443
17.7.2.0 Minimum conformance requirements 5443
17.7.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements 5443
17.7.2.0.2 Inter-frequency SS-RSRQ measurement accuracy requirements 5443
17.7.2.1 NR SA FR2 SS-RSRQ measurement accuracy for 2 Rx UE 5443
17.7.2.2 NR SA FR2-FR2 SS-RSRQ measurement accuracy for 2 Rx UE 5446
17.7.3 L1-RSRP measurement for beam reporting for RedCap 5449
17.7.3.0 Minimum conformance requirements 5449
17.7.3.0.1 SSB-based L1-RSRP absolute measurement accuracy requirements 5449
17.7.3.0.2 SSB-based L1-RSRP relative measurement accuracy requirements 5449
17.7.3.0.3 CSI-RS-based L1-RSRP absolute measurement accuracy requirements 5449
17.7.3.0.4 CSI-RS-based L1-RSRP relative measurement accuracy requirements 5449
17.7.3.1 NR SA FR2 SSB based L1-RSRP measurement accuracy for 2 Rx UE 5449
17.7.3.2 NR SA FR2 CSI-RS based L1-RSRP measurement accuracy for 2 Rx UE 5454
17.7.4 SS-SINR for RedCap 5457
17.7.4.0 Minimum conformance requirements 5457
17.7.4.0.1 Intra-frequency SS-SINR measurement accuracy requirements 5457
17.7.4.0.2 Inter-frequency SS-SINR measurement accuracy requirements 5458
17.7.4.1 NR SA FR2 SS-SINR measurement accuracy for 2 Rx UE 5458
17.7.4.2 NR SA FR2-FR2 SS-SINR measurement accuracy for 2 Rx UE 5461

18 E-UTRA - NR inter-RAT with E-UTRA serving cell for RedCap 5464
18.1 RRC_IDLE state mobility for RedCap 5464
18.1.1 Inter-RAT cell re-selection for RedCap 5464
18.1.1.0 Minimum conformance requirements 5464
18.1.1.1 E-UTRA - NR SA FR1 E-UTRA cell re-selection to higher priority NR target Cell for 2 Rx UE 5464
18.2 RRC_CONNECTED state mobility for RedCap 5468
18.2.1 Handover for RedCap 5468
18.2.1.0 Minimum conformance requirements 5468
18.2.1.1 E-UTRA - NR SA FR1 handover for 2 Rx UE 5468
18.2.2.0 Minimum conformance requirements 5472
18.2.2.0.1 Redirection from E-UTRA to FR1 RedCap UE 5472
18.2.2.1 E-UTRA - NR SA FR1 RRC connection release with redirection for 2 Rx UE 5473
18.3 Measurement procedure for RedCap 5478
18.3.1 E-UTRA - NR Measurements for RedCap 5478
18.3.1.0 Minimum conformance requirements 5478
18.3.1.0.1 Minimum conformance requirements for E-UTRA - NR event-triggered measurement 5478
18.3.1.1 E-UTRA - NR SA FR1 event triggered reporting without SSB time index detection in non-DRX 5481
18.3.1.2 E-UTRA - NR SA FR1 event triggered reporting without SSB time index detection in DRX 5485
18.3.1.3 E-UTRA - NR SA FR1 event triggered reporting with SSB time index detection in non-DRX 5488
18.3.1.4 E-UTRA - NR SA FR1 event triggered reporting with SSB time index detection in DRX 5492
18.3.1.5 E-UTRA - NR SA FR2 event triggered reporting without SSB time index detection in non-DRX 5496
18.3.1.6 E-UTRA - NR SA FR2 event triggered reporting without SSB time index detection in DRX 5498
18.3.1.7 E-UTRA - NR SA FR2 event triggered reporting with SSB time index detection in non-DRX 5500
18.3.1.8 E-UTRA - NR SA FR2 event triggered reporting with SSB time index detection in DRX 5503

19 NR standalone tests for ATG 5505
19.2 RRC_CONNECTED state mobility 5505
19.2.1 Handover for ATG 5505
19.2.1.0 Minimum conformance requirements 5505
19.2.1.0.1 Minimum conformance requirements for NR FR1 – NR FR1 handover 5505
19.2.1.1 Intra-frequency handover from FR1 to FR1; known target cell 5506
19.2.1.2 Inter-frequency handover from FR1 to FR1; unknown target cell 5510
19.2.2 Conditional Handover for ATG 5514
19.2.2.0 Minimum conformance requirements 5514
19.2.2.0.1 Minimum conformance requirements for NR FR1 – NR FR1 conditional handover 5514
19.2.2.1 Intra-frequency distance-based conditional Handover from FR1 to FR1 5516
19.2.2.2 Inter-frequency distance-based conditional Handover from FR1 to FR1 5520
19.4 Signalling characteristics for ATG 5525
19.4.1 Radio link monitoring for ATG 5525

19.4.1.0 Minimum conformance requirements 5525
19.4.1.0.1 Minimum conformance requirements for SSB based RLM 5525
19.4.1.0.2 Minimum conformance requirements for CSI-RS based RLM 5526
19.4.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode 5527
19.4.1.2 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode 5531
19.4.1.3 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode 5535
The rate of correct events observed during repeated tests shall be at least 90 % with the confidence level of 95%.19.4.1.4 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode 5539
19.6 Measurement Performance requirements for ATG 5543
19.6.1 SS-RSRP for ATG 5543
19.6.1.0 Minimum conformance requirements 5543
19.6.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements 5543
19.6.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements 5543
19.6.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements 5543
19.6.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements 5543
19.6.1.1 Intra-frequency measurements for ATG 5543
19.6.1.1.1 NR SA FR1 SS-RSRP absolute measurement accuracy for ATG 5543
19.6.1.1.2 NR SA FR1 SS-RSRP relative measurement accuracy for ATG 5545
19.6.1.2 Inter-frequency measurements for ATG 5546
19.6.1.2.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for ATG 5546
19.6.1.2.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy for ATG 5548
19.6.2 SS-RSRQ for ATG 5549
19.6.2.0 Minimum conformance requirements 5549
19.6.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements 5549
19.6.2.0.2 Inter-frequency SS-RSRQ absolute measurement accuracy requirements 5550
19.6.2.0.3 Inter-frequency SS-RSRQ relative measurement accuracy requirements 5550
19.6.2.1 NR SA FR1 SS-RSRQ absolute measurement accuracy for ATG 5550
19.6.2.2 Inter-frequency SS-RSRQ measurements for ATG 5551
19.6.2.2.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for ATG 5551
19.6.2.2.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for ATG 5553
19.6.3 SS-SINR for ATG 5554
19.6.3.0 Minimum conformance requirements 5554
19.6.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements 5554
19.6.3.0.2 Inter-frequency SS-SINR absolute measurement accuracy requirements 5554
19.6.3.0.3 Inter-frequency SS-SINR relative measurement accuracy requirements 5554
19.6.3.1 NR SA FR1 SS-SINR absolute measurement accuracy for ATG 5554
19.6.3.2 Inter-frequency SS-SINR measurements for ATG 5556
19.6.3.2.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy for ATG 5556
19.6.3.2.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy for ATG 5557
19.6.4 L1-RSRP measurement for beam reporting for ATG 5559
19.6.4.0 Minimum conformance requirements 5559
19.6.4.0.1 SSB based absolute L1-RSRP measurement accuracy requirements 5559
19.6.4.0.2 SSB based relative L1-RSRP measurement accuracy requirements 5559
19.6.4.0.3 CSI-RS based absolute L1-RSRP measurement accuracy requirements 5559
19.6.4.0.4 CSI-RS based relative L1-RSRP measurement accuracy requirements 5559
19.6.4.1 SSB based L1-RSRP measurements for ATG 5559
19.6.4.1.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for ATG 5559
19.6.4.1.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy for ATG 5560
19.6.4.2 CSI-RS based L1-RSRP measurements for ATG 5562
19.6.4.2.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for ATG 5562
19.6.4.2.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for ATG 5563
- Table 6.7.4.2.2.5-1 is replaced by Table 19.6.4.2.1.5-1.19.6.5 L1-SINR measurement for beam reporting for ATG 5565
19.6.5.0 Minimum conformance requirements 5565

19.6.5.0.1 Minimum conformance requirements for CSI-RS based CMR and no dedicated IMR configured....5565
19.6.5.0.2 Minimum conformance requirements for SSB based CMR and dedicated IMR....5565
19.6.5.0.3 Minimum conformance requirements for CSI-RS based CMR and dedicated IMR....5565
19.6.5.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR for ATG....5565
19.6.5.1.1 NR SA FR1 L1-SINR absolute measurement accuracy with CSI-RS based CMR and no dedicated IMR for ATG....5565
19.6.5.1.2 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured L1-SINR relative measurement accuracy for ATG....5566
[Editor's note: duplication!]....5568
19.6.5.1.2 NR SA FR1 L1-SINR relative measurement accuracy with CSI-RS based CMR and no dedicated IMR for ATG....5568
19.6.5.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy for ATG....5569
[Editor's note: duplication!]....5570
19.6.5.2 NR SA FR1 L1-SINR absolute measurement accuracy with SSB based CMR and dedicated IMR for ATG....5570
19.6.5.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy for ATG....5572
19.6.5.3.1 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR absolute measurement accuracy for ATG....5572
[Editor's note: duplication!]....5573
19.6.5.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR for ATG....5573
19.6.5.3.1 NR SA FR1 L1-SINR absolute measurement accuracy with CSI-RS based CMR and dedicated IMR for ATG....5573
19.6.5.3.2 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR relative measurement accuracy for ATG....5574
- Table 6.7.9.3.1.5-1 is replaced by Table 19.6.5.3.1.5-1.[Editor's note: duplication!]....5576
19.6.5.3.2 NR SA FR1 L1-SINR relative measurement accuracy with CSI-RS based CMR and dedicated IMR for ATG....5576

Annex A (normative): RRM test configurations....5578

A.1 Reference measurement channels....5578
A.1.0 General....5578
A.1.1 PDSCH....5578
A.1.1.1 FDD....5578
A.1.1.2 TDD....5579
A.1.2 CORESET for RMSI scheduling....5581
A.1.2.1 FDD....5581
A.1.2.2 TDD....5581
A.1.3 CORESET for RMC scheduling....5583
A.1.3.1 FDD....5583
A.1.3.2 TDD....5584
A.1.4 CSI-RS....5587
A.1.4.1 FDD....5587
A.1.4.2 TDD....5589
A.1.4A CSI-RS for tracking....5594
A.1.4A.1 FR1....5594
A.1.4A.1.1 FDD....5594
A.1.4A.1.2 TDD....5594
A.1.4A.2 FR2....5595
A.1.4A.2.1 TDD....5595
A.1.4B CSI-IM configurations....5596
A.1.4B.1 FDD....5596
A.1.4B.2 TDD....5597
A.1.5 TDD UL/DL configuration....5598
A.1.6 PUSCH....5599

A.1A Reference measurement channels under CCA....5599
A.1A.0 General....5599
A.1A.1 PDSCH....5600
A.1A.1.1 FDD....5600
A.1A.2 CORESET for RMSI scheduling....5600

A.1A.2.1 TDD 5600
A.1A.3 CORESET for RMC scheduling 5601
A.1A.3.1 TDD 5601
A.1A.4 TDD UL/DL configuration 5602
A.1A.4.1 TDD 5602
A.1A.5 RMC burst transmission model 5602
A.2 Reference OCNG configuration 5602
A.2.1 Generic OFDMA channel noise generator (OCNG) 5602
A.3 Reference SSB configuration 5604
A.3.1 SSB configuration for FR1 5604
A.3.2 SSB configuration for FR2 5605
A.3A Reference SSB configuration under CCA 5606
A.3A.1 SSB configuration under CCA for FR1 5606
A.3A.1.1 SSB pattern 1 under CCA for semi-static channel access: SSB allocation for SSB SCS=30kHz in 40MHz 5606
A.3A.1.2 SSB pattern 2 under CCA for dynamic channel access: SSB allocation for SSB SCS=30kHz in 40MHz 5606
A.3A.1.3 SSB pattern 3 under CCA for semi-static channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz 5606
A.3A.1.4 SSB pattern 4 under CCA for dynamic channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz 5607
A.3B Reference SSB configuration for RedCap 5607
A.3B.1 SSB configuration for FR1 5607
A.3B.2 SSB configuration for FR2 5608
A.4 Reference SMTC configuration 5608
A.4A Reference SMTC configuration for RedCap 5609
A.5 Reference DRX configurations 5609
A.6 EN-DC test setup 5609
A.6.1 E-UTRA serving cell parameters 5609
A.6.1.1 E-UTRA serving cell parameters for EN-DC tests with NR FR1 5610
A.6.1.2 E-UTRA serving cell parameters for EN-DC tests with NR FR2 5611
A.6A NR FR1-FR2 test setup 5613
A.6B EN-DC test setup with unlicensed bands 5613
A.6B.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) under CCA in FR1 5613
A.7 Reference PRACH configurations 5614
A.7.1 PRACH configurations for FR1 5614
A.7.1A PRACH configurations for FR1 under CCA 5616
A.7.1A.1 FR1 PRACH configuration 1 under CCA 5616
A.7.1A.2 FR1 PRACH configuration 2 under CCA 5616
A.7.2 PRACH configurations for FR2 5617
A.7A Reference MsgA configurations 5618
A.7A.1 MsgA configurations for FR1 5619
A.7A.1A MsgA configurations for FR1 under CCA 5620
A.7A.1A.1 FR1 MsgA configuration 1 under CCA 5620
A.7A.1A.2 FR1 MsgA configuration 2 under CCA 5621
A.7A.2 MsgA configurations for FR2 5622
A.8 Reference BWP configurations 5623
A.8.1 Downlink BWP configurations 5623
A.8.2 Uplink BWP configurations 5624
A.8A Reference BWP configurations for RedCap 5624
A.8A.1 Downlink BWP configurations 5624
A.8A.2 Uplink BWP configurations 5625

A.9 Angle of Arrival (AoA) for FR2 RRM test cases 5625
A.9.1 Setup 1: Single AoA in Rx beam peak direction 5625
A.9.2 Setup 2: Single AoA in non Rx beam peak direction 5625
A.9.2.1 Setup 2a: Single AoA in non Rx beam peak direction without change in direction 5625
A.9.2.2 Setup 2b: Single AoA in non Rx beam peak direction with change in direction 5625
A.9.3 Setup 3: 2 AoAs 5625
A.9.4 Setup 4: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak 5626
A.9.4.1 Setup 4a: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak without change in direction 5626
A.9.4.2 Setup 4b: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak with change in direction 5626
A.9.7 Setup 7: 3 AoAs 5627

A.10 TCI State Configuration 5627
A.10.1 Introduction 5627
A.10.2 TCI states 5627

A.10A Unified TCI State Configuration 5627
A.10A.1 Introduction 5627
A.10A.2 DLorJoint TCI states 5628
A.10A.3 UL TCI states 5628

A.10B LTM Candidate TCI State Configuration 5629
A.10B.1 Introduction 5629
A.10B.2 LTM candidate DLorJoint TCI states 5629
A.10B.3 LTM candidate UL TCI states 5629

A.11 NR sidelink communication 5629
A.11.1 Introduction 5629
A.11.2 Reference resource pool configurations for NR Sidelink Communication 5630
A.11.3 Reference measurement channels for NR Sidelink Communication 5632

A.12 Discovery Burst Transmission Window configuration under CCA 5633
A.12.1 DBT Window pattern 1: DBT Window period = 20 ms with DBT Window duration = 1 ms 5633

A.13 Channel bandwidth (CBW) configurations 5633
A.13.1 DL UE specific CBW 5633
A.13.2 UL UE specific CBW 5633

A.14 Satellite access configuration 5633
A.14.2 Satellite specific configuration for neighbour cell 5634

A.15 SRS Configurations 5635
A.15.1 SRS Configuration for SCS=15kHz 5635
A.15.2 SRS Configuration for SCS=30kHz 5635
A.15.3 SRS Configuration for SCS=30kHz 5636

A.16 CSI-RS configurations for RRM 5637
A.16.1 FDD 5637
A.16.2 TDD 5637

A.17 Reference Cell DTX configurations 5639
A.17.1 Cell DTX Configuration 1: Cell DTX cycle = 160 ms and TAT = Infinity 5639

A.18 Spatial Relation Configuration 5639
A.18.1 Introduction 5639
A.18.2 Spatial Relation 5639

Annex B (normative): Conditions for RRM requirements applicability for operating bands .5640

B.1 Conditions for NR RRC_IDLE state mobility 5640
B.1.1 Introduction 5640
B.1.2 Conditions for measurements on NR intra-frequency cells for cell re-selection 5640
B.1.3 Conditions for measurements on NR inter-frequency cells for cell re-selection 5641
B.1.6 Conditions for measurements on NR intra-frequency cells for cell re-selection for satellite access 5643
B.1.7 Conditions for measurements on NR inter-frequency cells for cell re-selection for satellite access 5643

B.1.8 Conditions for measurements on NR intra-frequency cells for cell re-selection under CCA 5643
B.1.9 Conditions for measurements on NR inter-frequency cells for cell re-selection under CCA 5644

B.2 Conditions for NR RRC_CONNECTED state 5644
B.2.1 Introduction 5644
B.2.2 Conditions for NR intra-frequency measurements 5644
B.2.3 Conditions for NR inter-frequency measurements 5645
B.2.4 Conditions for NR L1-RSRP reporting 5646
B.2.4.1 Conditions for SSB based L1-RSRP reporting 5646
B.2.4.2 Conditions for CSI-RS based L1-RSRP reporting 5647
B.2.5 Conditions for RRC connection release with redirection to NR 5648
B.2.6 Conditions for UE transmit timing 5649
B.2.6.1 Conditions for SSB based UE transmit timing 5649
B.2.7 Conditions for NR intra-frequency measurements for RedCap 5650
B.2.8 Conditions for NR inter-frequency measurements for RedCap 5651
B.2.9 Conditions for NR intra-frequency measurements under CCA 5653
B.2.10 Conditions for NR inter-frequency measurements under CCA 5653
B.2.11 Conditions for NR L1-RSRP reporting under CCA 5653
B.2.11.1 Conditions for SSB based L1-RSRP reporting 5653
B.2.12 to B.2.16 5654
B.2.17 Conditions for NR intra-frequency measurements for satellite access 5654
B.2.18 Conditions for NR inter-frequency measurements for satellite access 5654
B.2.19 Conditions for NR L1-RSRP reporting for satellite access 5654
B.2.19.1 Conditions for SSB based L1-RSRP reporting for satellite access 5654
B.2.19.2 Conditions for CSI-RS based L1-RSRP reporting for satellite access 5655
B.2.20 Conditions for RRC connection release with redirection to NR for satellite access 5655

B.3 RRM requirement exceptions 5655
B.3.1 Introduction 5655
B.3.2 Receiver sensitivity relaxation for CA 5655
B.3.2.1 Receiver sensitivity relaxation for UE supporting CA in FR1 5655
B.3.2.2 Receiver sensitivity relaxation for UE configured with CA in FR1 5656
B.3.2.2.1 Inter-band carrier aggregation 5656
B.3.2.2.2 Reference sensitivity exceptions due to UL harmonic interference for CA 5656
B.3.2.2.3 Reference sensitivity exceptions due to intermodulation interference due to 2UL CA 5656
B.3.2.3 Receiver sensitivity relaxation for UE supporting CA in FR2 5656
B.3.2.4 Receiver sensitivity relaxation for UE configured with CA in FR2 5656
B.3.2.4.1 Intra-band contiguous carrier aggregation 5656
B.3.2.4.2 Intra-band non-contiguous carrier aggregation 5656
B.3.3 Receiver sensitivity relaxation for DC 5657
B.3.4 Receiver sensitivity relaxation for SUL 5657
B.3.4.1 Receiver sensitivity relaxation for UE supporting SUL in FR1 5657
B.3.4.2 Receiver sensitivity relaxation for UE configured with SUL in FR1 5657
B.3.4.2.1 Reference sensitivity exceptions due to UL harmonic interference for SUL 5657

B.4 Conditions for NR sidelink 5657
B.4.1 Test parameters for GNSS signals 5657
B.4.2 Conditions for PSBCH-RSRP Accuracy Requirements 5657
B.4.3 Conditions for Selection/Reselection to Intra-frequency SyncRef UE 5658
B.4.4 Conditions for L1 SL-RSRP Accuracy Requirements 5658

B.5 High level test procedure for SAN RRM tests 5658

Annex C (normative): Downlink physical channels and propagation conditions 5660

C.1 Downlink physical channels 5660
C.1.1 General 5660
C.1.2 Default downlink signal levels 5660
C.1.3 Default connection setup 5661

C.2 Propagation conditions 5661
C.2.0 General 5661
C.2.1 No interference 5661
C.2.2 Static propagation conditions 5662

C.2.2.0 General....5662
C.2.2.1 UE receiver with 2Rx antenna connectors....5662
C.2.2.2 UE receiver with 4Rx antenna connectors....5662
C.2.3 Multi-path fading propagation conditions....5662

Annex D (normative): Deviations from standard test configuration....5664

D.1 Test cases with different numerologies....5664

D.2 EN-DC test cases with different EN-DC configurations....5664
D.2.0 General....5664
D.2.1 Principle of testing....5664

D.3 Carrier aggregation test cases with different CA configurations....5664
D.3.0 General....5664
D.3.1 Principle of testing....5664

D.4 Antenna connection for 4Rx capable UEs....5664
D.4.0 General....5664
D.4.1 Principle of testing....5665
D.4.1.1 Single carrier tests....5665
D.4.1.2 Carrier aggregation tests....5666
D.4.1.3 EN-DC tests....5666
D.4.2 Antenna connection....5666
D.4.2.1 Antenna connection for NR bands where 2Rx is supported....5666
D.4.2.2 Antenna connection for NR bands where only 4Rx is supported....5666
D.4.2.3 Antenna connection for E-UTRA bands where 2Rx is supported....5666
D.4.2.4 Antenna connection for E-UTRA bands where only 4Rx is supported....5667

D.4A Antenna configurations with unlicensed bands for 4Rx capable UEs....5667
D.4A.1 Introduction....5667
D.4A.2 Principle of Testing....5667
D.4A.2.1 Single Carrier Tests....5667
D.4A.2.2 Carrier Aggregation Tests....5668
D.4A.2.3 EN-DC Tests....5668
D.4A.2.4 Antenna connection for bands where 2RX is supported....5668
D.4A.2.5 Antenna connection for bands where 4RX is supported....5668
D.4A.2.6 EN-DC LTE Antenna connection for bands where 2RX is supported....5668
D.4A.2.7 EN-DC LTE Antenna connection for bands where 4RX is supported....5668

D.4B Antenna connection for 8Rx capable UEs....5668
D.4B.1 Introduction....5668
D.4B.1 Principle of testing....5669
D.4B.1.1 Single carrier tests....5669
D.4B.1.2 Carrier aggregation tests....5669
D.4B.1.3 EN-DC tests....5669
D.4B.2 Antenna connection....5669
D.4B.2.1 Antenna connection for NR bands where 2Rx is supported....5669
D.4B.2.2 Antenna connection for NR bands where 4Rx is supported....5670
D.4B.2.3 Antenna connection for bands where 8Rx is supported....5670
D.4B.2.4 Antenna connection for E-UTRA bands where 2Rx is supported....5670
D.4B.2.5 Antenna connection for E-UTRA bands where 4Rx is supported....5670
D.4B.2.6 Antenna connection for E-UTRA bands where 8Rx is supported....5670

D.5 Test Cases with Different Channel Bandwidths....5670
D.5.1 Test Cases with Different E-UTRA Channel Bandwidths....5670
D.5.1.1 Introduction....5670
D.5.1.2 Principle of testing....5670

D.6 Test Cases for Synchronous and Asynchronous DC Operations....5671
D.6.1 EN-DC Test Cases for Synchronous and Asynchronous EN-DC Operations....5671
D.6.1.1 Introduction....5671
D.6.1.2 Principle of Testing....5671

D.7 CCA model....5671

D.7.1 Introduction 5671
D.7.2 CCA model for operation on a carrier frequency with CCA in FR1 5671
D.7.2.1 DL CCA model 5671
D.7.2.2 UL CCA model 5672
D.7.3 Void 5673
D.8 Test Cases in SA and EN-DC Operations 5673
D.8.0 General 5673
D.8.1 Principle of testing 5673
Annex E (normative): Cell configuration mapping 5674
E.0 General 5674
E.1 Test frequency selection 5674
E.1.0 General 5674
E.1.1 E-UTRA PCell for EN-DC test cases 5674
E.1.2 Test cases with one NR cell 5674
E.1.3 Test cases with more than one NR cell 5674
E.1.3.1 Intra-frequency test cases 5674
E.1.3.2 Inter-frequency test cases 5674
E.1.4 Carrier aggregation test cases 5675
E.1.4.1 Inter-band carrier aggregation 5675
E.1.4.2 Intra-band contiguous carrier aggregation 5675
E.1.4.3 Intra-band non-contiguous carrier aggregation 5675
E.1.5 E-UTRA – NR inter RAT test cases 5675
E.1.6 Intra-band EN-DC test cases 5675
E.1.6.1 Intra-band non-contiguous EN-DC 5675
E.1.6.1.1 Inter frequency neighbour cell 5675
E.1.6.2 Intra-band contiguous EN-DC 5675
E.1.6.1.1 E-UTRA PCell 5675
E.1.7 NR sidelink test cases 5676
E.2 Cell configuration mapping for EN-DC FR1 test cases in Chapter 4 5676
E.3 Cell configuration mapping for EN-DC FR2 test cases in Chapter 5 5680
E.4 Cell configuration mapping for SA FR1 test cases in Chapter 6 5683
E.5 Cell configuration mapping for SA FR2 test cases in Chapter 7 5690
E.6 Cell configuration mapping for E-UTRAN – SA test cases in Chapter 8 5695
E.7 Cell configuration mapping for NR sidelink test cases in Chapter 9 5697
E.8 Cell configuration mapping for EN-DC FR1 Shared Spectrum test cases in Chapter 10 5697
E.9 Cell configuration mapping for SA FR1 Shared Spectrum test cases in Chapter 11 5701
E.13 5712
E.14 Cell configuration mapping for SA FR1 test cases for RedCap in Chapter 16 5712
E.15 Cell configuration mapping for SA FR2 test cases for RedCap in Chapter 17 5718
E.16 Cell configuration mapping for E-UTRAN – SA test cases for RedCap in Chapter 18 5720
E.17 Cell configuration mapping for SA FR1 test cases for ATG in Chapter 19 5721
Annex F (normative): Measurement uncertainties and test tolerances 5723
F.1 Measurement uncertainties and test tolerances for FR1 and FR2 5723
F.1.1 Acceptable uncertainty of test system (normative) 5723
F.1.1.1 Measurement of test environments 5723
F.1.1.2 Measurement of RRM requirements 5723
F.1.2 Interpretation of measurement results (normative) 5789
F.1.3 Test Tolerance and Derivation of Test Requirements (informative) 5790
F.1.3.1 Measurement of test environments 5790

F.1.3.2 Measurement of RRM requirements 5790

Annex G (normative): Statistical testing 5943

G.1 General 5943

G.2 Statistical testing of delay and UE measurement performance in RRM tests 5943
G.2.1 General 5943
G.2.2 Design of the test 5943
G.2.3 Numerical definition of the pass fail limits 5943
G.2.4 Pass fail decision rules 5944
G.2.5 Void 5945
G.2.6 Test conditions for delay tests and UE measurement performance 5945
G.2.7 Additional considerations for tests in bands subject to CCA failure 5945

G.3 Statistical testing of NR sidelink CBR measurement tests 5946
G.3.1 General 5946
G.3.2 Design of the test 5946
G.3.3 Numerical definition of the pass fail limits 5946
G.3.4 Pass fail decision rules 5947

G.4 Theory to derive the numbers in Table G.2.3-1 (informative) 5948

G.5 Theory to derive the numbers in Table G.3.3-1 (informative) 5948
G.5.1 Algorithm to calculate pass and fail probabilities 5948
G.5.2 Method of designing pass/fail limit to approach given risk probability 5951

Annex H (normative): Default message contents for RRM 5956

H.1 Void 5956

H.2 System information blocks message content exceptions 5956
H.2.1 System information blocks message contents exceptions for NR intra frequency cell re-selection 5956
H.2.2 System information blocks message contents exceptions for NR inter frequency cell re-selection 5957
H.2.3 System information blocks message contents exceptions for NR inter-RAT cell re-selection 5959

H.3 RRC message content exceptions 5960
H.3.1 RRC messages and information elements contents exceptions for NR measurement configuration 5960
H.3.2 RRC messages and information elements contents exceptions for handover 5976
H.3.3 RRC messages and information elements contents exceptions for NR inter-RAT handover 5977
H.3.4 E-UTRA RRC messages and information elements contents exceptions 5978
H.3.6 RRC messages and IE content exceptions for L1-RSRP measurement for beam reporting 5986
H.3.6A RRC messages and IE content exceptions for L1-SINR measurement for beam reporting 5988
H.3.7 RRC messages and information elements contents exceptions for NR cell search when DRX is used 5992
H.3.8 RRC messages and information elements contents exceptions for NR RRC reconfiguration delay 5994
H.3.9 RRC messages and information elements contents exceptions for UL timing 5995
H.3.10 RRC messages and information elements contents exceptions for Shared Spectrum Access 5996
H.3.11 RRC messages and information elements contents exceptions for UL Tx switching 5997
H.3.12 RRC messages and information elements contents exceptions for L1/L2-triggered mobility 6009

Annex I (normative): RRM OTA procedures 6018

I.0 Test applicability per permitted test method 6018

I.1 Direct far field (DFF) 6018
I.1.1 RX beam peak direction search 6018
I.1.2 Search for directions corresponding to the EIS spherical coverage percentile 6018

I.2 Direct far field (DFF) simplification 6018
I.2.1 RX beam peak direction search 6018
I.2.2 Search for directions corresponding to the EIS spherical coverage percentile 6019

I.3 Indirect far field (IFF) 6019
I.3.1 RX beam peak direction search 6019
I.3.2 Search for directions corresponding to the EIS spherical coverage percentile 6019

I.3A Enhanced indirect far field (Enhanced IFF) 6019

I.3A.1 RX beam peak direction search 6019
I.3A.2 Search for directions corresponding to the EIS spherical coverage percentile 6019
I.4 Procedures to search test directions for RRM FR2 6019
I.4.1 RSRPB-based scan with fallback option to Rx beam peak direction search 6019
I.5 Re-Positioning Approach for RRM FR2 6020
I.5.1 1 AoA Test Cases 6021
I.5.2 2 AoA Test Cases 6022
Annex J (informative): Change history 6024
History 6142

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the measurement procedures for the conformance test of the user equipment (UE) that contain requirements for support of RRM (Radio Resource Management) as part of the 5G New Radio (5G-NR). The present document covers NR Range 1, NR Range 2 and Interworking.

The requirements are listed in different clauses only if the corresponding parameters deviate. More generally, tests are only applicable to those mobiles that are intended to support the appropriate functionality. To indicate the circumstances in which tests apply, this is noted in the "*test applicability*" part of the test.

For example, only Release 15 and later UE declared to support NR shall be tested for this functionality. In the event that for some tests different conditions apply for different releases, this is indicated within the text of the test itself.

2 References

The following documents contain provisions, which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

[2] 3GPP TS 38.101-1: "NR; User Equipment (UE) radio transmission and reception; Part 1: Range 1 Standalone".

[3] 3GPP TS 38.101-2: "NR; User Equipment (UE) radio transmission and reception; Part 2: Range 2 Standalone".

[4] 3GPP TS 38.101-3: "NR; User Equipment (UE) radio transmission and reception; Part 3: Range 1 and Range 2 Interworking operation with other radios".

[5] 3GPP TS 38.101-4: "NR; User Equipment (UE) radio transmission and reception; Part 4: Performance requirements".

[6] 3GPP TS 38.133: "NR; Requirements for support of radio resource management".

[7] 3GPP TS 38.211: "NR; Physical channels and modulation".

[8] 3GPP TS 38.213: "NR; Physical layer procedures for control".

[9] 3GPP TS 38.214: "NR; Physical layer procedures for data".

[10] 3GPP TS 38.215: "NR; Physical layer measurements".

[11] 3GPP TS 38.306: "NR; User Equipment (UE) radio access capabilities".

[12] 3GPP TS 38.321: "NR; Medium Access Control (MAC) protocol specification".

[13] 3GPP TS 38.331: "NR; Radio Resource Control (RRC); Protocol specification".

[14] 3GPP TS 38.508-1: "5GS; User Equipment (UE) conformance specification; Part 1: Common test environment".

[15] 3GPP TS 38.508-2: "5GS; User Equipment (UE) conformance specification; Part 2: Common Implementation Conformance Statement (ICS) proforma".

[16] 3GPP TS 38.509: "5GS; Special Conformance Testing Functions for UE".

[17] 3GPP TS 38.521-1: "NR; User Equipment (UE) conformance specification; Radio transmission and reception; Part 1: Range 1 Standalone".

[18] 3GPP TS 38.521-2: " NR; User Equipment (UE) conformance specification; Radio transmission and reception; Part 2: Range 2 Standalone".

[19] 3GPP TS 38.521-3: " NR; User Equipment (UE) conformance specification; Radio transmission and reception; Part 3: Range 1 and Range 2 Interworking operation with other radios".

[20] 3GPP TS 38.521-4: "NR; User Equipment (UE) conformance specification; Part 4: Performance".

[21] 3GPP TS 38.522: "NR; User Equipment (UE) conformance specification; Applicability of radio transmission, radio reception and radio resource management test cases".

[22] 3GPP TS 38.903: "NR; Derivation of test tolerances and measurement uncertainty for User Equipment (UE) conformance test cases".

[23] 3GPP TS 36.133: "E-UTRA requirements for support of radio resource management".

[24] 3GPP TS 36.211: "E-UTRA Physical Channels and Modulation".

[25] 3GPP TS 36.508: "Common test environments for User Equipment (UE)".

[26] 3GPP TS 36.521-3: "E-UTRA; UE conformance specification; Radio transmission and reception; Part 3: Radio Resource Management (RRM) conformance testing"

[27] 3GPP TS 36.101: "E-UTRA UE radio transmission and reception".

[28] 3GPP TS 38.104: "NR; Base Station (BS) radio transmission and reception".

[29] 3GPP TS 36.331: "Evolved Universal Terrestrial Radio Access (E-UTRA) Radio Resource Control (RRC) Protocol Specification".

[30] 3GPP TS 38.304: "NR; User Equipment (UE) procedures in idle mode".

[31] 3GPP TS 38.212 "NR; Multiplexing and channel coding".

[32] 3GPP TR 38.810: "Study on test methods for New Radio".

[33] 3GPP TR 36.213: "E-UTRA; Physical layer procedures".

[34] 3GPP TS 37.340: "NR; Multi-connectivity; Overall description; Stage-2".

[35] 3GPP TS 38.300: "NR; NR and NG-RAN Overall description; Stage-2".

[36] 3GPP TS 37.106: "User Equipment (UE) requirements for shared spectrum channel access".

[37] 3GPP TS 37.213: “LTE; 5G; Physical layer procedures for shared spectrum channel access”.

[38] 3GPP TS 37.355: "LTE Positioning Protocol (LPP) ".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

1 Rx RedCap: RedCap UE for which requirements are derived assuming 1 Rx branch.

2 Rx RedCap: RedCap UE for which requirements are derived assuming 2 Rx branches.

Active DL BWP: Active DL bandwidth part as defined in 3GPP TS 38.213 [8].

Blackbox Approach: Testing methodology, in which the UE internal implementation of certain specific UE functionality involved in the test, is unknown.

Control Resource Set: As defined in 3GPP TS 38.213 [8].

DL BWP: DL bandwidth part as defined in 3GPP TS 38.213 [8].

EN-DC: E-UTRA-NR Dual Connectivity as defined in clause 4.1.2 of 3GPP TS 37.340 [34].

en-gNB: As defined in 3GPP TS 37.340 [34].

FR1: Frequency range 1 as defined in clause 5.1 of 3GPP TS 38.104 [28].

FR2: Frequency range 2 as defined in clause 5.1 of 3GPP TS 38.104 [28].

gNB: as defined in 3GPP TS 38.300 [TBD].

Master Cell Group: As defined in 3GPP TS 38.331 [13].

Multi-Radio Dual Connectivity: Dual Connectivity between E-UTRA and NR nodes, or between two NR nodes, as defined in 3GPP TS 37.340 [34].

ng-eNB: As defined in 3GPP TS 38.300 [35].

NE-DC: NR-E-UTRA Dual Connectivity as defined in clause 4.1.3.2 of 3GPP TS 37.340 [34].

NGEN-DC: NG-RAN E-UTRA-NR Dual Connectivity as defined in clause 4.1.3.1 of 3GPP TS 37.340 [34].

NR-DC: NR-NR Dual Connectivity as defined in clause 4.1.3.3 of 3GPP TS 37.340 [34].

Primary Cell: As defined in 3GPP TS 38.331 [13].

Quasi Co-Location: As defined in 3GPP TS 38.214 [9].

RedCap UE: A UE with reduced capabilities as defined in clause 4.2 in TS 38.306 [11].

RLM-RS resource: A resource out of the set of resources configured for RLM by higher layer parameter RLM-RS-List [2] as defined in 3GPP TS 38.213 [8].

SA operation mode: Operation mode when the UE is configured with at least PCell and not any MR-DC.

Secondary Cell: As defined in 3GPP TS 38.331 [13].

Secondary Cell Group: As defined in 3GPP TS 38.331 [13].

Serving Cell: As defined in 3GPP TS 38.331 [13].

SMTC: An SSB-based measurement timing configuration configured by *SSB-MeasurementTimingConfiguration* as specified in 3GPP TS 38.331 [13].

Special Cell: As defined in 3GPP TS 38.331 [13].

SSB: SS/PBCH block as defined in clause 7.8.3 of 3GPP TS 38.211 [7].

Timing Advance Group: As defined in 3GPP TS 38.331 [13].

3.2 Symbols

For the purposes of the present document, the following symbols apply:

[…]	Values included in square bracket shall be considered for further studies, because it means that a decision about that value was not taken.
$BW_{Channel}$	Channel bandwidth, defined in TS 38.101-1 [2], 38.101-2 [3] and 38.101-3 [4] subclause 3.2

Ês	Received energy per RE (power normalized to the subcarrier spacing) during the useful part of the symbol, i.e. excluding the cyclic prefix, at the UE antenna connector or at the gNB reference point as defined in TS 38.215 [10], subclause 5.2 for the respective measurement type
Io	The total received power density, including signal and interference, as measured at the UE antenna connector.
Ioc	The power spectral density (integrated in a noise bandwidth equal to the chip rate and normalized to the chip rate) of a band limited noise source (simulating interference from cells, which are not defined in a test procedure) as measured at the UE antenna connector.
Iot	The received power spectral density of the total noise and interference for a certain RE (power integrated over the RE and normalized to the subcarrier spacing) as measured at the UE antenna connector or at the gNB reference point as defined in TS 38.215 [10], subclause 5.2 for the respective measurement type
N_{oc}	The power spectral density of a white noise source (average power per RE normalised to the subcarrier spacing), simulating interference from cells that are not defined in a test procedure, as measured at the UE antenna connector
S	Cell Selection Criterion defined in TS 38.304, subclause 5.2.3.2 for NR
SSB_RP	Received (linear) average power of the resource elements that carry NR synchronisation burst, measured at the UE antenna connector
Srxlev	Cell selection RX level, defined in TS 38.304, subclause 5.2.3.2
Squal	Cell selection quality, defined in TS 38.304, subclause 5.2.3.2
Sintrasearch	Defined in TS 38.304 [30], subclause 5.2.4.7 for E-UTRAN amd 38.304 subclause 5.2.4.7 for NR
Snonintrasearch	Defined in TS 38.304 [30], subclause 5.2.4.7
$Thresh_{x, high}$	Defined in TS 38.304 [30], subclause 5.2.4.7
$Thresh_{x, low}$	Defined in TS 38.304 [30], subclause 5.2.4.7
$Thresh_{serving, low}$	Defined in TS 38.304 [30], subclause 5.2.4.7
$T_{RE-ESTABLISH-REQ}$	The RRC Re-establishment delay requirement, the time between the moment when erroneous CRCs are applied, to when the UE starts to send preambles on the PRACH.T_cBasic time unit, defined in clause 4.1 of 3GPP TS 38.211 [7].
T_s	Reference time unit, defined in clause 4.1 of 3GPP TS 38.211 [7].
$T_{UE_re\text{-}establish_delay}$	Time between the moments when any of the conditions requiring RRC re-establishment as defined in clause 5.3.7 in TS 38.331 [13] is detected by the UE and when the UE sends PRACH to the target PCell.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

AoA	Angle of Arrival
AoD	Angle of Departure
BFD	Beam Failure Detection
BFD-RS	BFD Reference Signal
BS	Base Station
BWP	Bandwidth Part
CBD	Candidate Beam Detection
CDF	Cumulative Distribution Function
CC	Component Carrier
CCA	Clear Channel Assessment
CLI	Cross Link Interference
CMR	Channel Measurement Resource
CORESET	Control Resource Set
CP	Cyclic Prefix
CPA	Conditional PSCell Addition
CPAC	Conditional PSCell Addition or Change
CPC	Conditional PSCell Change
CSI	Channel-State Information
CSI-RS	CSI Reference Signal
CSI-RSRP	CSI Reference Signal based Reference Signal Received Power
CSI-RSRQ	CSI Reference Signal based Reference Signal Received Quality
CSI-SINR	CSI Reference Signal based Signal to Noise and Interference Ratio
DBT	Discovery Burst Transmission

DC	Dual Connectivity
DCI	Downlink Control Information
DL	Downlink
DMRS	Demodulation Reference Signal
DRX	Discontinuous Reception
E-CID	Enhanced Cell ID
E-UTRA	Evolved UTRA
E-UTRA/5GC	E-UTRA connected to 5GC
E-UTRAN	Evolved UTRAN
EN-DC	E-UTRA – NR Dual Connectivity
FR	Frequency Range
FR1	Frequency Range 1
FR2	Frequency Range 2
GEO	Geostationary Earth Orbit
HARQ	Hybrid Automatic Repeat Request
HO	Handover
IMR	Interference Measurement Resource
L1-RSRP	Layer 1 RSRP
LEO	Low Earth Orbit
LMF	Location Management Function
LPP	LTE Positioning Protocol
LTM	L1/L2 triggered mobility
MAC	Medium Access Control
MCG	Master Cell Group
MG	Measurement Gap
MGL	Measurement Gap Length
MGRP	Measurement Gap Repetition Period
MIB	Master Information Block
MN	Master Node
MR-DC	Multi-Radio Dual Connectivity
NCSG	Network Controlled Small Gap
NE-DC	NR-E-UTRA Dual Connectivity
NGEN-DC	NG-RAN E-UTRA-NR Dual Connectivity
NR	New Radio
NR/5GC	NR connected to 5GC
NR-DC	NR-NR Dual Connectivity
NTN	Non-Terrestrial Network
NSA	Non-Standalone
OCNG	OFDMA Channel Noise Generator
OFDM	Orthogonal Frequency Division Multiplexing
OFDMA	Orthogonal Frequency Division Multiple Access
PCC	Primary Component Carrier
PCell	Primary Cell
PDCCH	Physical Downlink Control Channel
PDSCH	Physical Downlink Shared Channel
PLMN	Public Land Mobile Network
PRACH	Physical RACH
PRS	Positioning Reference Signal
PSCell	Primary Secondary Cell
PSS	Primary Synchronization Signal
pTAG	Primary Timing Advance Group
PUCCH	Physical Uplink Control Channel
PUSCH	Physical Uplink Shared Channel
QCL	Quasi Co-Location
RACH	Random Access Channel
RAT	Radio Access Technology
RedCap	Reduced Capabilities
RLM	Radio Link Monitoring
RLM-RS	Reference Signal for RLM
RMC	Reference Measurement Channel
RMSI	Remaining Minimum System Information
RMTC	RSSI Measurement Timing Configuration

RRC	Radio Resource Control
RRM	Radio Resource Management
RSRP	Reference Signal Received Power
RSRQ	Reference Signal Received Quality
RSSI	Received Signal Strength Indicator
RSTD	Reference Signal Time Difference
RTT	Round Trip Time
SA	Standalone
SAB	Satellite Access Band
SAN	Satellite Access Node
SCC	Secondary Component Carrier
SCell	Secondary Cell
SCG	Secondary Cell Group
SCPAC	Subsequent conditional PSCell Addition or Change
SCS	Subcarrier Spacing
SCS_{SSB}	SSB subcarrier spacing
SDL	Supplementary Downlink
SFN	System Frame Number
SFTD	SFN and Frame Timing DifferenceSI System Information
SIB	System Information Block
SMTC	SSB-based Measurement Timing configuration
SpCell	Special Cell
SRS	Sounding Reference Signal
SRS-RSRP	Sounding Reference Signal based Reference Signal Received Power
SS	System Simulator
SS-RSRP	Synchronization Signal based Reference Signal Received Power
SS-RSRQ	Synchronization Signal based Reference Signal Received Quality
SS-SINR	Synchronization Signal based Signal to Noise and Interference Ratio
SSB	Synchronization Signal Block
SSB_RP	Received (linear) average power of the resource elements that carry NR SSB signals and channels, measured at the UE antenna connector.
SSS	Secondary Synchronization Signal
sTAG	Secondary Timing Advance Group
SUL	Supplementary Uplink
TA	Timing Advance
TAG	Timing Advance Group
TCI	Transmission Configuration Indicator
TN	Terrestrial Network
TTI	Transmission Time Interval
UL	Uplink
VIL	Visible Interruption Length
VIRP	Visible Interruption Repetition Period

3A Requirements for the support of RRM

3A.1 General

3A.1.0 Overview of RRM requirements

Radio Resource Management (RRM) ensures the efficient use of the available radio resources and also provides mechanisms that enable NR to meet radio resource related requirements. The requirements are divided in four main clauses according to the network deployment and the frequency range:

- Clause 4 for EN-DC test cases where all NR cells are in FR1.
- Clause 5 for EN-DC test cases where at least one NR cell is in FR2.
- Clause 6 for NR/5GCtest cases where all NR cells are in FR1.

- Clause 7 for NR/5GCtest cases where at least one NR cell is in FR2.

The requirements that are tested include:

- Idle mode, the cell re-selection algorithms that are controlled by the setting of parameters (thresholds and hysteresis values) that define the best cell and/or determine when the UE should select a new cell.

  Inactive mode, the cell re-selection algorithms that are controlled by the setting of parameters (thresholds and hysteresis values) that define the best cell and/or determine when the UE should select a new cell.

- The configuration of the UE measurement and reporting procedures that are transmitted via dedicated signalling in connected mode and the reporting accuracy of the required measurements.

- Connected mode, the mobility of radio connections that has to be supported.

- Handover decisions that may be based on UE or gNB measurements.

- Inter-RAT RRM, the management of radio resources in connection with inter-RAT mobility, e.g. Inter-RAT handover.

Inter frequency and inter-RAT test cases are performed without frequency overlapping between cells required in the test:

- For bands with bandwidth not accommodating all the NR cells required in the test without frequency overlapping, inter band testing shall be done according to clause 3A.5. If the UE does not support the combination given in clause 3A.5, the relevant tests are applicable only to the bands with the necessary bandwidth.

- In case when frequency overlapping occurs due to the frequency channel selection defined for the test (i.e. Cell number as per Annex D), other frequency channels which avoid the frequency overlapping shall be selected. If no suitable selection is found the test is not applicable for the affected band.

3A.1.1 Test coverage across 5G NR connectivity options

The test cases in this specification cover both NR/5GC (including FR1+ FR2 CA or FR1+FR2 NR-DC) as well as EN-DC and NGEN-DC testing. Below shall be the understanding with respect to coverage across 5G NR connectivity options:

1. Unless otherwise stated within the test case, it shall be understood that test requirements are agnostic of the EN-DC and NGEN-DC connectivity option configured within the test. The test coverage across the EN-DC and NGEN-DC connectivity options shall be considered fulfilled by executing the test case in one of these connectivity options.

2. EN-DC is the default connectivity option used for EN-DC and NGEN-DC test cases.

3. If a UE does not support EN-DC, NGEN-DC can be configured to execute the test. The leverage rule detailed in (1) would apply.

Table 3A.1.1-1: Void

Table 3A.1.1-2: Void

Editor's Note: Any additional test config details needed for NE-DC and NGEN-DC are FFS.

3A.2 Requirements Classification for Statistical Testing

The test requirements are expressed as absolute requirements with a single value stating the requirement or expressed as a success rate. The statistical nature depends on the type of test requirement. Some have large statistical variations, while others are not statistical in nature at all. When testing a parameter with a statistical nature, a confidence level is set. This establishes the probability that a Device Under Test (DUT) passing the test actually meets the test requirement

and determines how many times a test have to be repeated and what the pass and fail criteria is. The statistical significance shall be set according to Annex G.

3A.3 Antenna Configuration

Unless otherwise specified, NR FDD or NR TDD cells in all RRM test cases in AWGN propagation condition are configured with antenna configuration 1x2.

3A.4 NR band groups

3A.4.0 General

The intention of the band grouping defined in this clause is to increase the readability of the test specification.

The frequency bands grouping is derived based on UE REFSENS requirements specified in 3GPP TS 38.101-1 [2], TS 38.101-2 [3] and TS 38.101-3 [4] and assuming 0.5 dB step between the neighbour groups. The groups are defined in the order of increasing REFSENS, i.e., the group A has the smallest REFSENS among the groups. For the same SCS and a given bandwidth, the bands within the same group have the same Io conditions in a corresponding requirement in this specification, provided the bands support this SCS. For different SCSs supported by a frequency band and the same bandwidth, different Io conditions may apply for the frequency band in the requirements, while the band group is the same, based on the lowest REFSENS requirement normalized by the number of subcarriers among its supported SCSs for this bandwidth. For the same SCS but different supported bandwidths, the group for a band is determined based on the lowest REFSENS requirement normalized by the number of subcarriers among its supported bandwidths.

3A.4.1 NR operating bands in FR1

NR frequency bands grouping for FR1 is specified in Table 3A.4.1-1.

Table 3A.4.1-1: NR frequency band groups for FR1

Group	NR FDD		NR TDD		NR SDL		NR CCA[10]	
	Band group notation	Operating bands	Band group notation	Operating bands	Band group notation	Operating bands	Band group notation	Operating bands
A	NR_FDD_FR1_A	n1, n18, n24, n70, n74[4], n91, n92, n93, n94, n100, n109	NR_TDD_FR1_A	n34, n38[9], n39, n40, n50, n51, n53, n54, n101	NR_SDL_FR1_A	n67, n75, n76	NR_CCA_FR1_A	-
B	NR_FDD_FR1_B	n65, n66, n74[3]	NR_TDD_FR1_B	n38[7]	NR_SDL_FR1_B	-	NR_CCA_FR1_B	-
C	NR_FDD_FR1_C	n30	NR_TDD_FR1_C	n48, n77[1], n78, n79	NR_SDL_FR1_C	-	NR_CCA_FR1_C	-
D	NR_FDD_FR1_D	n28	NR_TDD_FR1_D	n77[2]	NR_SDL_FR1_D	-	NR_CCA_FR1_D	-
E	NR_FDD_FR1_E	n2, n5, n7	NR_TDD_FR1_E	n41, n90	NR_SDL_FR1_E	-	NR_CCA_FR1_E	-
F	NR_FDD_FR1_F	n26[6]	NR_TDD_FR1_F	-	NR_SDL_FR1_F	-	NR_CCA_FR1_F	-
G	NR_FDD_FR1_G	n3, n8, n12, n13, n14, n20, n71, n85, n105[11], n106	NR_TDD_FR1_G	n104	NR_SDL_FR1_G	n29	NR_CCA_FR1_G	-
H	NR_FDD_FR1_H	n25	NR_TDD_FR1_H	-	NR_SDL_FR1_H	-	NR_CCA_FR1_H	-
I	NR_FDD_FR1_I	-	NR_TDD_FR1_I		NR_SDL_FR1_I	-	NR_CCA_FR1_I	n46
J	NR_FDD_FR1_J	-	NR_TDD_FR1_J	n47[8]	NR_SDL_FR1_J	-	NR_CCA_FR1_J	n96, n102
K	NR_FDD_FR1_K	-	NR_TDD_FR1_K	-	NR_SDL_FR1_K	-	NR_CCA_FR1_K	-
L	NR_FDD_FR1_L	-	NR_TDD_FR1_L	-	NR_SDL_FR1_L	-	NR_CCA_FR1_L	-
M	NR_FDD_FR1_	-	NR_TDD_FR1_	-	NR_SDL_FR1_	-	NR_CCA_FR1_M	-

	M		M		M			
N	NR_FDD_FR1_N	n31, n72	NR_TDD_FR1_N	-	NR_SDL_FR1_N	-	NR_CCA_FR1_N	-

NOTE 1: Except 3.8 GHz to 4.2 GHz.
NOTE 2: Only 3.8 GHz to 4.2 GHz.
NOTE 3: Except 1475.9 MHz to 1510.9 MHz.
NOTE 4: Only when the band is confined in 1475.9 MHz to 1510.9 MHz.
NOTE 5: These bands are used only in NR carrier aggregation with other NR bands according to NR CA band combinations specified in TS 38.101-1 [2] and TS 38.101-3 [4].
NOTE 6: The minimum Io condition is reduced by 0.5 dB when the carrier frequency of the assigned NR channel bandwidth is within 865-894 MHz.
NOTE 7: When this band is only used for V2X SL service, the band is exclusively used for NR V2X in particular regions.
NOTE 8: This band is unlicensed band used for V2X service. There is no expected network deployment in this band.
NOTE 9: When this band is only used for WAN service.
NOTE 10: Operating bands where operation on carrier frequencies with CCA is supported.
NOTE 11: The minimum Io condition is reduced by 0.5 dB when the downlink channel overlap the 612-617 MHz frequency range and the channel bandwidth is 5 MHz.

Table 3A.4.1-2: Power offsets for the test configuration between NR frequency band groups for FR1 with respect to NR_FDD_FR1_A

Group	NR FDD		NR TDD		NR SDL	
	Band group notation	Power Offset [dB], Δ_{BG_offset}	Band group notation	Power Offset [dB], Δ_{BG_offset}	Band group notation	Power Offset [dB], Δ_{BG_offset}
A	NR_FDD_FR1_A	-	NR_TDD_FR1_A	0.0	NR_SDL_FR1_A	0.0
B	NR_FDD_FR1_B	0.5	NR_TDD_FR1_B	0.5	NR_SDL_FR1_B	-
C	NR_FDD_FR1_C	1.0	NR_TDD_FR1_C	1.0	NR_SDL_FR1_C	-
D	NR_FDD_FR1_D	1.5	NR_TDD_FR1_D	1.5	NR_SDL_FR1_D	-
E	NR_FDD_FR1_E	2.0	NR_TDD_FR1_E	2.0	NR_SDL_FR1_E	-
F	NR_FDD_FR1_F	2.5	NR_TDD_FR1_F	2.5	NR_SDL_FR1_F	-
G	NR_FDD_FR1_G	3.0	NR_TDD_FR1_G	3.0	NR_SDL_FR1_G	-
H	NR_FDD_FR1_H	3.5	NR_TDD_FR1_H	3.5	NR_SDL_FR1_H	-
J	NR_FDD_FR1_J	4.5	NR_TDD_FR1_J	4.5	NR_SDL_FR1_J	-
K to M	Reserved					
N	NR_FDD_FR1_N	6.5	NR_TDD_FR1_N	6.5	NR_SDL_FR1_N	-
NOTE: In the test parameters table, only the power configuration for NR_FDD_FR1_A or NR_TDD_FR1_A will be given.						

Table 3A.4.1-2A: Power offsets for the test configuration between NR frequency band groups for FR1 shared spectrum channel access with respect to NR_TDD_FR1_A

Group	NR-U	
	Band group notation	Power Offset [dB], Δ_{BG_offset}
I	NR_CCA_FR1_I	4.0
J	NR_CCA_FR1_J	4.5
NOTE: In the test parameters table, the power configuration for NR_CCA_FR1_I and/or NR_TDD_FR1_J will be given.		

3A.4.1A NR operating bands for satellite access in FR1

NR frequency bands grouping for satellite access in FR1 is specified in Table 3A.4.1A-1.

Table 3A.4.1A-1: NR frequency band groups for satellite access in FR1

Group	NR FDD	
	Band group notation	Operating bands
A	NR_FDD_SAB_FR1_A	n254, n255, n256
B	NR_FDD_SAB_FR1_B	FFS
C	NR_FDD_SAB_FR1_C	FFS
D	NR_FDD_SAB_FR1_D	FFS
E	NR_FDD_SAB_FR1_E	FFS

F	NR_FDD_SAB_FR1_F	FFS
G	NR_FDD_SAB_FR1_G	FFS
H	NR_FDD_SAB_FR1_H	FFS
I	NR_FDD_SAB_FR1_I	FFS
J	NR_FDD_SAB_FR1_J	FFS

Table 3A.4.1A-2: Power offsets for the test configuration between NR frequency band groups for FR1 satellite access with respect to NR_FDD_SAB_FR1_A

Group	NR-U	
	Band group notation	Power Offset [dB], Δ_{BG_offset}
B	NR_FDD_SAB_FR1_B	FFS
C	NR_FDD_SAB_FR1_C	FFS
D	NR_FDD_SAB_FR1_D	FFS
E	NR_FDD_SAB_FR1_E	FFS
F	NR_FDD_SAB_FR1_F	FFS
G	NR_FDD_SAB_FR1_G	FFS
H	NR_FDD_SAB_FR1_H	FFS
I	NR_FDD_SAB_FR1_I	FFS
J	NR_FDD_SAB_FR1_J	FFS
NOTE: In the test parameters table, the power configuration for NR_FDD_SAB_FR1_A will be given.		

3A.4.2 NR operating bands in FR2

NR frequency bands grouping for FR2 is specified in Table 3A.4.2-1.

Table 3A.4.2-1: NR frequency band groups for FR2

Group	Band group notation	Operating bands
A	NR_TDD_FR2_A	n257[1], n258[1], n261[1]
B	NR_TDD_FR2_B	n257[4], n258[4], n261[4]
C	NR_TDD_FR2_C	
D	NR_TDD_FR2_D	
E	NR_TDD_FR2_E	
F	NR_TDD_FR2_F	n260[4]
G	NR_TDD_FR2_G	n260[1]
H	NR_TDD_FR2_H	
I	NR_TDD_FR2_I	
J	NR_TDD_FR2_J	
K	NR_TDD_FR2_K	
L	NR_TDD_FR2_L	n257[2], n258[2], n261[2]
M	NR_TDD_FR2_M	
N	NR_TDD_FR2_N	
O	NR_TDD_FR2_O	
P	NR_TDD_FR2_P	
Q	NR_TDD_FR2_Q	
R	NR_TDD_FR2_R	

S	NR_TDD_FR2_S	
T	NR_TDD_FR2_T	n257[3], n258[3], n261[3]
U	NR_TDD_FR2_U	
V	NR_TDD_FR2_V	
W	NR_TDD_FR2_W	
X	NR_TDD_FR2_X	
Y	NR_TDD_FR2_Y	n260[3]
Z	NR_TDD_FR2_Y	
AA	NR_TDD_FR2_AA	n259[3]
NOTE 1: UE power class 1. NOTE 2: UE power class 2. NOTE 3: UE power class 3. NOTE 4: UE power class 4.		

Table 3A.4.2-2: FFS

3A.5 NR operating band configuration

The additional band defined in Table 3A.5-1 shall be used for RRM inter-frequency tests where the band under test cannot accommodate two (or more) non-overlapping inter-frequency cells. The usage of the additional band is conditioned to the UE supporting this band, the corresponding channel bandwidth and other band-dependent parameters. If the UE does not support the additional band or associated parameters, the inter-frequency test shall be considered Not Applicable for the band under test.

Inter-band configuration is not affecting the Test purpose since the minimum requirements are valid regardless of band. Band combinations defined in table 3A.5-1 shall be used for testing.

Table 3A.5-1: Inter-band configuration

Band under test	Additional band (s)
n12	n66
n14	n66
n18	n1
n30	n66
n34	n41
n38	n41
n39	n41
n53	n41
n70	n66
NOTE 1: The band under test should contain the inter-frequency (neighbour) cell. NOTE 2: The additional band should contain the serving cell of the test. If more than one inter-frequency cell is needed, that cell should be on the additional band. NOTE 3: The bands and cells referred in this table are NR bands and cells only. For instructions on how to configure the E-UTRA operating band please refer to 3GPP TS 36.521-3 [26]. NOTE 4: The additional bands in this table are to be used in NR SA test cases only. EN-DC test cases cannot make use of additional bands.	

3A.6 UE with Multiband Capability

The Radio Resource Management performance of a UE in all sections except 4.7, 5.7, 6.7, 7.7 and 8.5.2 is independent from all bands. Therefore, the required performance in the respective test cases can be verified in one of the bands supported by the UE, except for inter-band testing requirements in clause 3A.1.

The NR standalone test cases in sections 6.7 and 7.7 are dependent on the NR band of the target cell, and is required to be verified in all UE supported NR bands.

The EN-DC test cases in sections 4.7, 5.7 and inter-RAT test cases in clause 8.5.2 are dependent on the NR band of the target cell, and is required to be verified in all UE supported NR bands. It is not necessary to repeat the tests for different LTE bands. For EN-DC configurations with the same NR band, it is sufficient to configure any one of them to execute the tests.

4 EN-DC with all NR cells in FR1

4.0 General

This clause contains test scenarios for E-UTRA and NR dual connectivity with E-UTRA as PCell and NR and PSCell. All NR cells are in Frequency Range 1.

4.1 Void

4.2 Void

4.3 RRC_CONNECTED state mobility

4.3.1 Void

4.3.2 RRC connection mobility control

4.3.2.1 Void

4.3.2.2 Random access

4.3.2.2.1 EN-DC FR1 contention based random access

4.3.2.2.1.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits.

4.3.2.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

4.3.2.2.1.3 Minimum conformance requirement

The random access procedure is used when establishing the layer 1 communication between the UE and NG-RAN. The random access is as defined in TS 38.213 [8] clause 7.4 and the control of the RACH transmission is as defined in TS 38.321 [12] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 38.213 [8] clause 7.4 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in TS 38.101-1 [2] Table 6.3.4.2-1. The relative power applied to additional preambles shall have an accuracy as specified in TS 38.101-1 [2] Table 6.3.4.3-1.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in TS 38.321 [12] clause 5.1.4.

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2 in TS 38.321 [12].

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [12].

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2 and A.4.3.2.2.1.

4.3.2.2.1.4 Test description

4.3.2.2.1.4.1 Initial conditions

This test can be run in the configurations defined in Table 4.3.2.2.1.4.1-1.

Table 4.3.2.2.1.4.1-1: Contention based random access test in FR1 for PSCell in EN-DC supported test configurations

Test Case ID	Test Config Index	Description
4.3.2.2.1-1	1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.3.2.2.1-2	2	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.3.2.2.1-3	3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.3.2.2.1-4	4	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 4.3.2.2.1.4.1-2.

Table 4.3.2.2.1.4.1-2: Initial conditions for Contention based random access test in FR1 for EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.3.2.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.3.2.2.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The E-UTRAN PCell power levels and settings are specified in Table A.6.1.1-1. Cell 2 is the NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, with downlink signal levels as per clause C.1.2. General Test parameters are defined in Table 4.3.2.2.1.5-1.

3. Downlink signals for NR cell are initially set up according to clause C.2.1.

4.3.2.2.1.4.2 Test procedure

For this test two cells are used, an E-UTRA serving cell (PCell) and an NR FR1 PSCell. For the NR PSCell, the System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 4.3.2.2.1.5-1.

3. The test system shall send a RRCReconfiguration message to the UE to add NR PSCell, then the UE shall trigger a random access procedure.

4. Test 1: Correct behaviour when transmitting Random Access Preamble:

   4.1. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured rsrp-ThresholdSSB.

5. Test 2: Correct behaviour when receiving Random Access Response:

   5.1. Repeat steps 1-3.

   5.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

   5.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

   5.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   5.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

   5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 4.3.2.2.1.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 4.3.2.2.1.5.

6. Test 3: Correct behaviour when not receiving Random Access Response:

   6.1. Repeat steps 1-3.

   6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

   6.3. As no Random Access Response was received within the RA Response window, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 4.3.2.2.1.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 4.3.2.2.1.5.

7. Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission:

7.1. Repeat steps 1-3.

7.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

7.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3 including C-RNTI MAC control element.

7.4. The System Simulator shall send PDCCH addressed to the Temporary C-RNTI after receiving the msg3.

7.5. The UE shall re-transmit the msg3 including C-RNTI MAC control element.

7.6. The System Simulator shall check if UE re-transmit the msg3.

8. Test 5: Correct behaviour when receiving a successful UE Contention Resolution:

8.1. Repeat steps 1-3.

8.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

8.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3 including C-RNTI MAC control element.

8.4. The System Simulator shall send a PDCCH addressed to the C-RNTI.

8.5. The UE shall send PUSCH according to the received PDCCH addressed to the C-RNTI.

9. Test 7: Correct behaviour when contention Resolution timer expires:

9.1. Repeat steps 1-3.

9.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

9.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3 including C-RNTI MAC control element.

9.4. The System Simulator shall not send a PDCCH addressing the C-RNTI.

9.5. As there was no PDCCH addressing the C-RNTI, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the Contention Resolution Timer expires and then after the backoff timer expires.

9.6. Measure the power and timing of the first preamble after the Contention Resolution Timer and backoff timer expire and it shall not exceed the values specified in clause 4.3.2.2.1.5.

4.3.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.3.2.2.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-115 with SSB-Index 0 Table 4.6.3-120 with SSB-Index 0

Table 4.3.2.2.1.4.3-1: RACH-ConfigCommon for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n48		FR1
}			
groupBconfigured SEQUENCE {			
numberOfRA-PreamblesGroupA	48		
}			
ra-ContentionResolutionTimer	sf48		
rsrp-ThresholdSSB	RSRP_51		
prach-RootSequenceIndex CHOICE {			
l139	0		
}			
msg1-SubcarrierSpacing	kHz 15		15 kHz
	kHz 30		30 kHz
}			

Table 4.3.2.2.1.4.3-2: RACH-ConfigGeneric for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	102		FR1
msg1-FDM	one		FR1
zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-120		
preambleTransMax	n6		
powerRampingStep	dB2		
ra-ResponseWindow	sl10		
}			

Table 4.3.2.2.1.4.3-3: *ServingCellConfigCommon* for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 7.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
ss-PBCH-BlockPower	-5		
}			

4.3.2.2.1.5 Test requirement

Table 4.3.2.2.1.5-1 defines the primary level settings for contention based random access test in FR1 for PSCell in EN-DC. Tables 4.3.2.2.1.5-2, 4.3.2.2.1.5-3 and 4.3.2.2.1.5-4 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances.

Table 4.3.2.2.1.5-1: General test parameters for contention based random access test in FR1 for PSCell in EN-DC

Parameter			Unit	Test-1	Comments
SSB Configuration		Config 1,2		SSB.3 FR1	As defined in clause A.3.1
		Config 3,4		SSB.4 FR1	
Duplex Mode for Cell 2		Config 1,2		FDD	
		Config 3,4		TDD	
TDD Configuration		Config 3,4		TDDConf.2.1	
OCNG Pattern Note 1				OCNG pattern 1	As defined in clause A.2.1.
PDSCH parameters Note 4		Config 1,2		SR1.1 FDD	As defined in clause A.1.1.
		Config 3,4		SR.2.1 TDD	
RMSI CORESET reference channel		Config 1,2		CR.1.1 FDD	
		Config 3,4		CR.2.1 TDD	
Dedicated CORESET reference channel		Config 1,2		CCR.1.1 FDD	
		Config 3,4		CCR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP	Config 1,2	dBm / 15kHz	-95	
		Config 3,4		-98	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP	Config 1,2	dBm / 15kHz	-115	
		Config 3,4		-118	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1,2	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
PRACH Configuration				PRACH.1 FR1	As defined in clause A.7.1.
Propagation Condition			-	AWGN	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
NOTE 2: Es/Iot, SS-RSRP and Io level have been derived from other parameters for information purpose. They are not settable parameters.
NOTE 3: Void.
NOTE 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Test 1: Correct behaviour when transmitting Random Access Preamble:

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.

Test 2: Correct behaviour when receiving Random Access Response:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 4.3.2.2.1.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 4.3.2.2.1.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 4.3.2.2.1.5-4.

Test 3: Correct behaviour when not receiving Random Access Response:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 4.3.2.2.1.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 4.3.2.2.1.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 4.3.2.2.1.5-4.

Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission:

- The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

Test 5: Correct behaviour when receiving a successful UE Contention Resolution:

- The UE shall send PUSCH according to the PDCCH addressed to the C-RNTI.

Test 7: Correct behaviour when contention resolution timer expires:

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if the contention resolution timer expires.
- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 4.3.2.2.1.5-2.
- The transmit timing of the PRACH transmission shall be within the accuracy specified in Table 4.3.2.2.1.5-4.

Table 4.3.2.2.1.5-2: Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 4.3.2.2.1.5-3: Relative power tolerance Test requirements

Power step ΔP (Up or down) (dB)	PRACH (dB)
2 ≤ ΔP < 3	±3.2

Table 4.3.2.2.1.5-4: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	15	15	$880*T_c$
	30	30	$624*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [7]			

4.3.2.2.2 EN-DC FR1 non-contention based random access

4.3.2.2.2.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits.

4.3.2.2.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC. Additionally Test 2 is applicable to UE that supports CSI-RS based Random Access Preamble which requires UE to support csi-RS-CFRA-ForHO.

4.3.2.2.2.3 Minimum conformance requirement

The random access procedure is used when establishing the layer 1 communication between the UE and NG-RAN. The random access is as defined in TS 38.213 [8] clause 7.4 and the control of the RACH transmission is as defined in TS 38.321 [12] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 38.213 [8] clause 7.4 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in TS 38.101-1 [2] Table 6.3.4.2-1. The relative power applied to additional preambles shall have an accuracy as specified in TS 38.101-1 [2] Table 6.3.4.3-1.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in TS 38.321 [12] clause 5.1.4.

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs is configured, with the UE selected CSI-RS with CSI-RSRP above *cfra-csirs-DedicatedRACH-Threshold* amongst the associated CSI-RSs, UE shall have the capability to select the Random Access Preamble corresponding to the selected CSI-RS, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2 and A.4.3.2.2.2. Non-contention based random access procedure is not initialized for Other SI requested from UE or for beam failure recovery, so the requirements related to those features are omitted.

4.3.2.2.2.4 Test description

4.3.2.2.2.4.1 Initial conditions

This test can be run in the configurations defined in Table 4.3.2.2.2.4.1-1.

Table 4.3.2.2.2.4.1-1: Non-contention based random access test in FR1 for PSCell in EN-DC supported test configurations

Test Case ID	Test Config Index	Description
4.3.2.2.2-1	1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.3.2.2.2-2	2	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.3.2.2.2-3	3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.3.2.2.2-4	4	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 4.3.2.2.2.4.1-2.

Table 4.3.2.2.2.4.1-2: Initial conditions for Non-contention based random access test in FR1 for EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] subclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.3.2.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.3.2.2.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The E-UTRAN PCell power levels and settings are specified in Table A.6.1.1-1. Cell 2 is the NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, with downlink signal levels as per clause C.1.2. General Test parameters are defined in Table 4.3.2.2.2.5-1.

3. Downlink signals for NR cell are initially set up according to clause C.2.1.

4.3.2.2.2.4.2 Test procedure

For this test two cells are used, an E-UTRA serving cell (PCell) and an NR FR1 PSCell. For the NR PSCell, the System Simulator shall explicitly assign a random access preamble via dedicated signalling in the downlink. There are two subtests, to test both SSB-based non-contention based random access (subtest 1) and CSI-RS-based non-contention based random access (subtest 2).

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC , DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. Ensure the UE will choose SSB with index 0 to complete this procedure.

2. Set the parameters according to Table 4.3.2.2.2.5-1.

3. SS sends a RRCReconfiguration to trigger a contention-free random access procedure according to the Tables for Non-Contention Random Access in clause 4.3.2.2.2.4.3.

4. Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble:

   4.1. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble has the Preamble Index associated with the SSB with index 0, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

5. Test 2: Correct behaviour when transmitting CSI-RS-based Random Access Preamble:

   5.1. Set the parameters according to Table 4.3.2.2.2.5-1 Subtest 2.

   5.2. Repeat steps 1-3.

   5.3. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble has the Preamble Index associated with the CSI-RS configured, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

6. Test 3: Correct behaviour when receiving Random Access Response:

   6.1. Repeat steps 1-3.

   6.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

   6.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power.

   6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

   6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 4.3.2.2.2.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 4.3.2.2.2.5.

7. Test 4: Correct behaviour when not receiving Random Access Response:

   7.1. Repeat steps 1-3.

   7.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

   7.3. As no Random Access Response was received within the RA Response window configured in *RACH-ConfigCommon*, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power.

   7.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   7.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

   7.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 4.3.2.2.2.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 4.3.2.2.2.5.

4.3.2.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 with the following exceptions.

Table 4.3.2.2.2.4.3-0: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-115 with SSB-Index 0 Table 4.6.3-120 with SSB-Index 0

Table 4.3.2.2.2.4.3-1: RACH-ConfigCommon for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
rsrp-ThresholdSSB	RSRP_51		Subtest 1
prach-RootSequenceIndex CHOICE {			
l139	0		
}			
msg1-SubcarrierSpacing	kHz 15		15kHz
	kHz 30		30kHz
}			

Table 4.3.2.2.2.4.3-2: RACH-ConfigDedicated for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	1 entry		
ssb[1]	0		
ra-PreambleIndex[1]	40		Subtest 1
}			
ra-ssb-OccasionMaskIndex	1		Subtest 1
}			
csirs SEQUENCE {			
csirs-ResourceList SEQUENCE (SIZE(1..maxRA-CSIRS -Resources)) OF {			
ra-OccasionList	1		Subtest 2
ra-PreambleIndex[1]	40		Subtest 2
}			
rsrp-ThresholdCSI-RS	RSRP_51		Subtest 2
}			
}			
}			
}			

Table 4.3.2.2.2.4.3-3: RACH-ConfigGeneric for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	102		
msg1-FDM	one		
zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-120		
preambleTransMax	n6		

powerRampingStep	dB2		
ra-ResponseWindow	sl10		
}			

Table 4.3.2.2.2.4.3-4: *ServingCellConfigCommon* for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-168			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
ss-PBCH-BlockPower	-5		
}			

Table 4.3.2.2.2.4.3-5: CellGroupConfig for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-19 with Condition CFRA			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex		
reconfigurationWithSync SEQUENCE {			
newUE-Identity	1		
t304	ms1000		
rach-ConfigDedicated	RACH-ConfigDedicated for Non-Contention Based Random Access	Table 4.3.2.2.2.4.3-2	
}			
spCellConfigDedicated SEQUENCE {			
firstActiveDownlinkBWP-Id	BWP-Id		
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
srs-Config	SRS-Config		
}			
firstActiveUplinkBWP-Id	BWP-Id		
}			
}			
}			
}			

4.3.2.2.2.5 Test requirement

Table 4.3.2.2.2.5-1 defines the primary level settings for non-contention based random access test in FR1 for PSCell in EN-DC. Tables 4.3.2.2.2.5-2, 4.3.2.2.2.5-3 and 4.3.2.2.2.5-4 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances.

Table 4.3.2.2.2.5-1: General test parameters for non-contention based random access test in FR1 for PSCell in EN-DC

Parameter		**Unit**	**Test-1**	**Test-2**	**Comments**
SSB Configuration	Config 1,2		SSB.3 FR1	SSB.3 FR1	As defined in clause A.3.1
	Config 3,4		SSB.4 FR1	SSB.4 FR1	
CSI-RS Configuration	Config 1,2		N/A	CSI-RS.1.1 FDD	As defined in clause A.1.4
	Config 3,4			CSI-RS.2.1 TDD	
Duplex Mode for Cell 2	Config 1,2		FDD	FDD	
	Config 3,4		TDD	TDD	
TDD Configuration	Config 3,4		TDDConf.2.1	TDDConf.2.1	
OCNG Pattern Note 1			OCNG pattern 1	OCNG pattern 1	As defined in clause A.2.1
PDSCH parameters Note 4	Config 1,2		SR1.1 FDD	SR1.1 FDD	As defined in clause A.1.1
	Config 3,4		SR2.1 TDD	SR2.1 TDD	
RMSI CORESET reference channel	Config 1,2		CR.1.1 FDD	CR.1.1 FDD	
	Config 3,4		CR.2.1 TDD	CR.2.1 TDD	
Dedicated CORESET	Config 1,2		CCR.1.1 FDD	CCR.1.1 FDD	

Parameter			Unit	Test-1	Test-2	Comments
reference channel	Config 3,4			CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number				1	1	
EPRE ratio of PSS to SSS			dB	0	0	
EPRE ratio of PBCH_DMRS to SSS			dB			
EPRE ratio of PBCH to PBCH_DMRS			dB			
EPRE ratio of PDCCH_DMRS to SSS			dB			
EPRE ratio of PDCCH to PDCCH_DMRS			dB			
EPRE ratio of PDSCH_DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH_DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	-98	
		Config 3,4		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	3	3	
	SS-RSRP Note 3	Config 1,2	dBm/15kHz	-95	-95	
		Config 3,4		-98	-98	
	SS-RSRP Note 3		dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	-98	
		Config 3,4		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	-17	
	SS-RSRP Note 3	Config 1,2	dBm/15kHz	-115	-115	
		Config 3,4		-118	-118	
	SS-RSRP Note 3		dBm/ SCS	-115	-115	
Io Note 2		Config 1,2	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16MHz	-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [13]
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1 [2]
PRACH Configuration				PRACH.2 FR1	PRACH.3 FR1	As defined in clause A.7.1
Propagation Condition			-	AWGN	AWGN	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
NOTE 2: Es/Iot, SS-RSRP and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
NOTE 3: Void.
NOTE 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble:

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.
- The Random Access Preamble shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0.
- The selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

Test 2: Correct behaviour when transmitting CSI-RS-based Random Access Preamble:

- The Random Access Preamble shall have the Preamble Index associated with the CSI-RS configured.
- The Random Access Preamble shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured.

- the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

Test 3: Correct behaviour when receiving Random Access Response:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 4.3.2.2.2.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 4.3.2.2.2.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 4.3.2.2.2.5-4.

Test 4: Correct behaviour when not receiving Random Access Response:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 4.3.2.2.2.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 4.3.2.2.2.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 4.3.2.2.2.5-4.

Table 4.3.2.2.2.5-2: Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 4.3.2.2.2.5-3: Relative power tolerance Test requirements

Power step ΔP (Up or down) (dB)	PRACH (dB)
2 ≤ ΔP < 3	± 3.2

Table 4.3.2.2.2.5-4: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	15	15	$880*T_c$
	30	30	$624*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [7].			

4.3.2.2.3 EN-DC FR1 2-step contention based random access

4.3.2.2.3.1 Test purpose

The purpose of this test is to verify that the behaviour of the 2-step random access procedure is according to the requirements and that the MsgA PRACH and MsgA PUSCH power settings and timing are within specified limits.

4.3.2.2.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC and twoStepRACH-r16.

4.3.2.2.3.3 Minimum conformance requirement

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [12].

The UE shall have capability to calculate MsgA PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and the MsgA PUSCH power formula of clause 7.1.1 of TS 38.213 [8] and apply this power level at the first MsgA or additional MsgA repetitions. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [2] for frequency range 1 and in Table 6.3.4.2-1 of TS 38.101-2 [3] for frequency range 2. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [2] for frequency range 1 and clause 6.3.4.3 of TS38.101-2 [3] for frequency range 2.

The UE shall switch to 4-step RA type procedure if the MsgA transmission counter has exceeded *msgA-TransMax*, if configured, as specified in clause 5.1.4a of TS 38.321 [12]. The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4a in TS 38.321 [12].

The requirements in this clause apply for UE in SA operation mode or any MR-DC operation mode.

4.3.2.2.3.3.1 Correct behaviour when transmitting MsgA

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, the UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2a in TS 38.321 [7].

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, UE shall have the capability to transmit MsgA PRACH on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured.

The PRACH preamble and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, the UE should have the capability to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

4.3.2.2.3.3.2 Correct behaviour when receiving MsgB

The UE shall stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [8] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [12].

The UE shall send ACK if Success RAR is received in MsgB and the Contention Resolution is successful, as defined in clause 5.1.4a in TS 38.321 [12].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH and monitor contention resolution as described in clause 8.2A in TS 38.213 [8].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [12].

4.3.2.2.3.3.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2.3 and A.4.3.2.2.3.

4.3.2.2.3.4 Test description

4.3.2.2.3.4.1 Initial conditions

This test can be run in the configurations defined in Table 4.3.2.2.3.4.1-1.

Table 4.3.2.2.3.4.1-1: Contention based random access test in FR1 for PSCell in EN-DC supported test configurations

Test Case ID	Test Config Index	Description
4.3.2.2.3-1	1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.3.2.2.3-2	2	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.3.2.2.3-3	3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.3.2.2.3-4	4	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 4.3.2.2.3.4.1-2.

Table 4.3.2.2.3.4.1-2: Initial conditions for Contention based random access test in FR1 for EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.3.2.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.3.2.2.3.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The E-UTRAN PCell power levels and settings are specified in Table A.6.1.1-1. Cell 2 is the NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, with downlink signal levels as per clause C.1.2. General Test parameters are defined in Table 4.3.2.2.3.5-1.
3. Downlink signals for NR cell are initially set up according to clause C.2.1.

4.3.2.2.3.4.2 Test procedure

For this test two cells are used, an E-UTRA serving cell (PCell) and an NR FR1 PSCell. For the NR PSCell, the System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink:

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 4.3.2.2.3.5-1.
3. The test system shall send a RRCReconfiguration message to the UE to add NR PSCell, then the UE shall trigger a random access procedure.
4. Test 1: Correct behaviour when transmitting MsgA:
   4.1. The UE shall send a MsgA to the System Simulator. The System Simulator shall check that the MsgA preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SSB_RP above the configured rsrp-ThresholdSSB.
   4.2 Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 4.3.2.2.3.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 4.3.2.2.3.5.
5. Test 2: Correct behaviour when receiving MsgB:
   5.1. Repeat steps 1-3.

5.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB containing identifiers that do not match the transmitted Random Access Preamble.

5.3. As the received MsgB contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

5.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

5.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 4.3.2.2.3.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 4.3.2.2.3.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 4.3.2.2.3.5.

6. Test 3: Correct behaviour when not receiving MsgB:

6.1. Repeat steps 1-3.

6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

6.3. As no MsgB was received within the RA Response window, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

6.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

6.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 4.3.2.2.3.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 4.3.2.2.3.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 4.3.2.2.3.5.

4.3.2.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.3.2.2.3.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-115 with SSB-Index 0 Table 4.6.3-120 with SSB-Index 0

Table 4.3.2.2.3.4.3-1: *BWP-UplinkCommon*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-14			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-UplinkCommon ::= SEQUENCE {			
rach-ConfigCommon CHOICE {			
Setup	RACH-ConfigCommon	Table 4.3.2.2.3.4.3-2	

}			
rach-ConfigCommonIAB-r16	Not present		
useInterlacePUCCH-PUSCH-r16	Not present		
msgA-ConfigCommon-r16 CHOICE {			
setup SEQUENCE {			
rach-ConfigCommonTwoStepRA-r16	RACH-ConfigCommonTwoStepRA specified in TS 38.508-1 [14] Table 7.3.1-13A		
msgA-PUSCH-Config-r16	MsgA-PUSCH-Config-r16 specified in TS 38.508-1 [14] Table 7.3.1-14A		
}			
}			
}			

Table 4.3.2.2.3.4.3-2: *RACH-ConfigCommon* (Table 4.3.2.2.3.4.3-1)

Derivation Path: TS 38.508-1 [14] Table 7.3.1-13			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
totalNumberOfRA-Preambles	Not present		
}			

4.3.2.2.3.5 Test requirement

Table 4.3.2.2.3.5-1 defines the primary level settings for contention based random access test in FR1 for PSCell in EN-DC.

Table 4.3.2.2.3.5-1: General test parameters

Parameter			Unit	Test-1	Comments
SSB Configuration		Config 1,2		SSB.3 FR1	As defined in clause A.3.1
		Config 3,4		SSB.4 FR1	
Duplex Mode for Cell 2		Config 1,2		FDD	
		Config 3,4		TDD	
TDD Configuration		Config 3,4		TDDConf.2.1	
OCNG Pattern Note 1				OCNG pattern 1	As defined in clause A.2.1.
PDSCH parameters Note 4		Config 1,2		SR1.1 FDD	As defined in clause A.1.1.
		Config 3,4		SR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP	Config 1,2	dBm / 15kHz	-95	
		Config 3,4		-98	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	

	SS-RSRP	Config 1,2	dBm / 15kHz	-115	
		Config 3,4		-118	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1,2	dBm	-65.3/9.36 MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
MsgA Configuration				FR1 MsgA configuration 1	
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
Propagation Condition			-	AWGN	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
NOTE 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.					
NOTE 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					

Test 1: Correct behaviour when transmitting MsgA:

- The MsgA shall be one of the Random Access Preambles associated with SSB index 0.
- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 4.3.2.2.3.5-2.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 4.3.2.2.3.5-2A.

Test 2: Correct behaviour when receiving MsgB:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 4.3.2.2.3.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 4.3.2.2.3.5-3.
- The transmit timing of all MsgA PRACH transmissions shall be within the accuracy specified in Table 4.3.2.2.3.5-4.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 4.3.2.2.3.5-2A.

Test 3: Correct behaviour when not receiving MsgB:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 4.3.2.2.3.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 4.3.2.2.3.5-3.
- The transmit timing of all MsgA PRACH transmissions shall be within the accuracy specified in Table 4.3.2.2.3.5-4.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 4.3.2.2.3.5-2A.

Table 4.3.2.2.3.5-2: MsgA PRACH Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 4.3.2.2.3.5-2A: MsgA PUSCH Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 4.3.2.2.3.5-3: Relative power tolerance Test requirements

Power step ΔP (Up or down) (dB)	MsgA PRACH (dB)
2 ≤ ΔP < 3	± 3.2 dB

Table 4.3.2.2.3.5-4: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	15	15	880*T_c
	30	30	624*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [7]			

4.3.2.2.4 EN-DC FR1 2-step non-contention based random access

4.3.2.2.4.1 Test purpose

The purpose of this test is to verify that the behaviour of the 2-step non-contention based random access procedure is according to the requirements and that the MsgA PRACH and MsgA PUSCH power settings and timing are within specified limits.

4.3.2.2.4.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC and twoStepRACH-r16.

4.3.2.2.4.3 Minimum conformance requirement

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [12].

The UE shall have capability to calculate MsgA PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and the MsgA PUSCH power formula of clause 7.1.1 of TS 38.213 [8] and apply this power level at the first MsgA or additional MsgA repetitions. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [2] for frequency range 1 and in Table 6.3.4.2-1 of TS 38.101-2 [3] for frequency range 2. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [2] for frequency range 1 and clause 6.3.4.3 of TS38.101-2 [3] for frequency range 2.

The UE shall switch to 4-step RA type procedure if the MsgA transmission counter has exceeded *msgA-TransMax*, if configured, as specified in clause 5.1.4a of TS 38.321 [12]. The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4a in TS 38.321 [12].

The requirements in this clause apply for UE in SA operation mode or any MR-DC operation mode.

4.3.2.2.4.3.1 Correct behaviour when transmitting MsgA

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [12].

In association with the MsgA PRACH, the UE should have the capability to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [8].

4.3.2.2.4.3.2 Correct behaviour when receiving MsgB

The UE may stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [8] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [12].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH as described in clause 8.2A in TS 38.213 [8].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12] for the next available PRACH occasion, and transmit the preamble with the calculated MsgA PRACH and MsgA PUSCH transmission power if all received MsgBs contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

4.3.2.2.4.3.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12] for the next available PRACH occasion, and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power, if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA* and the Random Access Response Reception has not been considered as successful as defined in clause 5.1.4a in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2.3 and A.4.3.2.2.4.

4.3.2.2.4.4 Test description

4.3.2.2.4.4.1 Initial conditions

This test can be run in the configurations defined in Table 4.3.2.2.4.4.1-1.

Table 4.3.2.2.4.4.1-1: Non-contention based random access test in FR1 for PSCell in EN-DC supported test configurations

Test Case ID	Test Config Index	Description
4.3.2.2.4-1	1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.3.2.2.4-2	2	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.3.2.2.4-3	3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.3.2.2.4-4	4	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 4.3.2.2.4.4.1-2.

Table 4.3.2.2.4.4.1-2: Initial conditions for non-contention based random access test in FR1 for EN-DC

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.3.2.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.3.2.2.4.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The E-UTRAN PCell power levels and settings are specified in Table A.6.1.1-1. Cell 2 is the NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, with downlink signal levels as per clause C.1.2. General Test parameters are defined in Table 4.3.2.2.4.5-1.

3. Downlink signals for NR cell are initially set up according to clause C.2.1.

4.3.2.2.4.4.2 Test procedure

For this test two cells are used, an E-UTRA serving cell (PCell) and an NR FR1 PSCell. For the NR PSCell, the System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 4.3.2.2.4.5-1.

3. The test system shall send a RRCReconfiguration message to the UE to add NR PSCell, then the UE shall trigger a random access procedure.

4. Test 1: Correct behaviour when transmitting MsgA:

   4.1. The UE shall send a MsgA to the System Simulator. The System Simulator shall check that the MsgA preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *msgA-SSB-SharedRO-MaskIndex*.

   4.2 Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 4.3.2.2.4.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 4.3.2.2.4.5.

5. Test 2: Correct behaviour when receiving MsgB:

   5.1. Repeat steps 1-3.

   5.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB containing identifiers that do not match the transmitted Random Access Preamble.

   5.3. As the received MsgB contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

   5.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   5.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 4.3.2.2.4.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 4.3.2.2.4.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 4.3.2.2.4.5.

6. Test 3: Correct behaviour when not receiving MsgB:

6.1. Repeat steps 1-3.

6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

6.3. As no MsgB was received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA*, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

6.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

6.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 4.3.2.2.3.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 4.3.2.2.3.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 4.3.2.2.4.5.

4.3.2.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.3.2.2.4.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-115 with SSB-Index 0 Table 4.6.3-120 with SSB-Index 0

Table 4.3.2.2.4.4.3-1: *Same as Table 4.3.2.2.3.4.3-1*

Table 4.3.2.2.4.4.3-2: *Same as Table 4.3.2.2.3.4.3-2*

Table 4.3.2.2.4.4.3-3: *RACH-ConfigDedicated*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-129 with condition 2-step RA			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated ::= SEQUENCE {			
cfra	Not present		
cfra-TwoStep-r16 SEQUENCE {			
occasionsTwoStepRA-r16 SEQUENCE {			
rach-ConfigGenericTwoStepRA-r16 SEQUENCE {			
msgA-PRACH-ConfigurationIndex-r16	Not present	Same value in RACH-ConfigGeneric will be used	
msgA-RO-FDM-r16	Not present		
msgA-RO-FrequencyStart-r16	Not present		
msgA-ZeroCorrelationZoneConfig-r16	Not present		
msgA-PreamblePowerRampingStep-r16	Not present		
msgA-PreambleReceivedTargetPower-r16	Not present		
msgB-ResponseWindow-r16	sl10		
preambleTransMax-r16	Not present		

}			
ssb-PerRACH-OccasionTwoStepRA-r16	oneFourth		
}			
msgA-CFRA-PUSCH-r16 SEQUENCE {			
msgA-MCS-r16	1		
nrofSlotsMsgA-PUSCH-r16	1		
nrofMsgA-PO-PerSlot-r16	one		
msgA-PUSCH-TimeDomainOffset-r16	1		
startSymbolAndLengthMsgA-PO-r16	27	S = 0, L = 14	
mappingTypeMsgA-PUSCH-r16	typeA		
nrofPRBs-PerMsgA-PO-r16	2		
msgA-DMRS-Config-r16 SEQUENCE {			
msgA-DMRS-AdditionalPosition-r16	pos1		
msgA-PUSCH-NrofPorts-r16	1		
}			
msgA-Alpha-r16	alpha1		
}			
resourcesTwoStep-r16 SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF CFRA-SSB-Resource {	1 entry		
CFRA-SSB-Resource SEQUENCE {		entry 1	
ssb[1]	0		
ra-PreambleIndex[1]	50		
}			
}			
ra-ssb-OccasionMaskIndex	1		
}			
}			
}			

4.3.2.2.4.5 Test requirement

Table 4.3.2.2.4.5-1 defines the primary level settings for non-contention based random access test in FR1 for PSCell in EN-DC.

Table 4.3.2.2.4.5-1: General test parameters

Parameter			Unit	Test-1	Comments
SSB Configuration		Config 1,2		SSB.3 FR1	As defined in clause A.3.1
		Config 3,4		SSB.4 FR1	
Duplex Mode for Cell 2		Config 1,2		FDD	
		Config 3,4		TDD	
TDD Configuration		Config 3,4		TDDConf.2.1	
OCNG Pattern Note 1				OCNG pattern 1	As defined in clause A.2.1.
PDSCH parameters Note 4		Config 1,2		SR1.1 FDD	As defined in clause A.1.1.
		Config 3,4		SR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP	Config 1,2	dBm / 15kHz	-95	
		Config 3,4		-98	
	SS-RSRP		dBm/ SCS	-95	

Parameter			Unit	Test-1	Comments
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP	Config 1,2	dBm / 15kHz	-115	
		Config 3,4		-118	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1,2	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
MsgA Configuration				FR1 MsgA configuration 2	
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
Propagation Condition			-	AWGN	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
NOTE 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.					
NOTE 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					

Test 1: Correct behaviour when transmitting MsgA:

- The MsgA shall be one of the Random Access Preambles associated with SSB index 0.
- The MsgA shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0.
- The selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *msgA-SSB-SharedRO-MaskIndex*.
- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 4.3.2.2.4.5-2.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 4.3.2.2.4.5-2A.

Test 2: Correct behaviour when receiving MsgB:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 4.3.2.2.4.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 4.3.2.2.4.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 4.3.2.2.4.5-4.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 4.3.2.2.4.5-2A.

Test 3: Correct behaviour when not receiving MsgB:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 4.3.2.2.4.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 4.3.2.2.4.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 4.3.2.2.4.5-4.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 4.3.2.2.4.5-2A.

Table 4.3.2.2.4.5-2: MsgA PRACH Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 4.3.2.2.4.5-2A: MsgA PUSCH Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 4.3.2.2.4.5-3: Relative power tolerance Test requirements

Power step ΔP (Up or down) (dB)	MsgA PRACH (dB)
2 ≤ ΔP < 3	± 3.2 dB

Table 4.3.2.2.4.5-4: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	15	15	880*T_c
	30	30	624*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [7]			

4.3.2.3 Void

4.4 Timing

4.4.1 UE transmit timing

4.4.1.0 Minimum conformance requirements

4.4.1.0.1 Minimum conformance requirements for UE transmit timing accuracy

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 4.4.1.0.1-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS or it is the PRACH transmission.

The UE shall meet the Te requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{\mathrm{TA}} + N_{\mathrm{TA\,offset}})\times T_{\mathrm{c}}$. The downlink timing is defined as the time when the first detected path (in time) of the corresponding downlink frame is received from the reference cell. N_{TA} for PRACH is defined as 0.

$(N_{\mathrm{TA}} + N_{\mathrm{TA\,offset}})\times T_{\mathrm{c}}$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in TS 38.133 [6] clause 7.3 was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{\mathrm{TA\,offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{\mathrm{TA\,offset}}$ is defined in Table 4.4.1.0.1-2.

Table 4.4.1.0.1-1: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (KHz)	SCS of uplink signals s(KHz)	T_e
1	15	15	12*64*T_c
		30	10*64*T_c

		60	10*64*T_c
	30	15	8*64*T_c
		30	8*64*T_c
		60	7*64*T_c
2	120	60	3.5*64*T_c
		120	3.5*64*T_c
	240	60	3*64*T_c
		120	3*64*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [6].			

Table 4.4.1.0.1-2: The Value of $N_{\text{TA offset}}$

Frequency range and band of cell used for uplink transmission	$N_{\text{TA offset}}$ (Unit: T_C)
FR1 FDD band without LTE-NR coexistence case or FR1 TDD band without LTE-NR coexistence case	25600 (Note 1)
FR1 FDD band with LTE-NR coexistence case	0 (Note 1)
FR1 TDD band with LTE-NR coexistence case	39936 (Note 1)
FR2	13792
NOTE 1: The UE identifies $N_{\text{TA offset}}$ based on the information n-TimingAdvanceOffset according to TS 38.101-1 [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{\text{TA offset}}$ is set as 25600 for FR1 band. In case of multiple UL carriers in the same TAG, UE expects that the same value of n-TimingAdvanceOffset is provided for all the UL carriers according to clause 4.2 in TS 38.101-2 [3] and the value 39936 of $N_{\text{TA offset}}$ can also be provided for a FDD serving cell. NOTE 2: Void	

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell except when the timing advance in TS 38.133 [6] clause 7.3 is applied.

When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$, the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{\text{TA}} + N_{\text{TA offset}}) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q.

2) The minimum aggregate adjustment rate shall be T_p per second.

3) The maximum aggregate adjustment rate shall be T_q per 200ms.

where the maximum autonomous time adjustment step T_q and the aggregate adjustment rate T_p are specified in Table 4.4.1.0.1-3.

Table 4.4.1.0.1-3: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (KHz)	T_q	T_p
1	15	5.5*64*T_c	5.5*64*T_c
	30	5.5*64*T_c	5.5*64*T_c
	60	5.5*64*T_c	5.5*64*T_c
2	60	2.5*64*T_c	2.5*64*T_c
	120	2.5*64*T_c	2.5*64*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [6].			

The normative reference for this requirement is TS.38.133 [6] clause 7.1.2.

4.4.1.1 EN-DC FR1 UE transmit timing accuracy

4.4.1.1.1 Test purpose

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits.

4.4.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

4.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.4.1.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.4.4.1.1.

4.4.1.1.4 Test Description

4.4.1.1.4.1 Initial Conditions

This test can be run in one of the configurations defined in Table 4.4.1.1.4.1-1.

Table 4.4.1.1.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
4.4.1.1-1	LTE FDD, NR FDD, SSB SCS 15 KHz, data SCS 15 KHz, BW 10 MHz
4.4.1.1-2	LTE FDD, NR TDD, SSB SCS 15 KHz, data SCS 15 KHz, BW 10 MHz
4.4.1.1-3	LTE FDD, NR TDD, SSB SCS 30 KHz, data SCS 30 KHz, BW 40 MHz
4.4.1.1-4	LTE TDD, NR FDD, SSB SCS 15 KHz, data SCS 15 KHz, BW 10 MHz
4.4.1.1-5	LTE TDD, NR TDD, SSB SCS 15 KHz, data SCS 15 KHz, BW 10 MHz
4.4.1.1-6	LTE TDD, NR TDD, SSB SCS 30 KHz, data SCS 30 KHz, BW 40 MHz
NOTE: The UE is only required to be tested in one of the supported test configurations in FR1 depending on UE capability.	

Configure the test equipment and the DUT according to the parameters in Table 4.4.1.1.4.1-2

Table 4.4.1.1.4.1-2: Initial conditions for EN-DC FR1 transmit timing accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.4.1.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6 4.4.1.1.4.3.
2. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.6.1.1-1. The power levels and settings for Cell 1 are set according to clause A.6, Table A.6.1.1-1. Cell 2 is NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2.
3. Downlink signals for NR cell are initially set up according to clause C.1.

4.4.1.1.4.2 Test procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell). The downlink timing of the PSCell is changed and the changes in UE transmit timing are observed. The transmit timing is verified by the UE transmitting SRS used as a measurement reference facilitating the SS timing estimation.

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test:

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Set up E-UTRA PCell according to parameters given in Table A.6.1.1-1 and setup NR PSCell according to parameters given in Table 4.4.1.1.5-1.

3. The SS shall transmit an RRCConnectionReconfiguration message configuring the UE with the message content defined in clause 4.4.1.1.4.3.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. After connection set up with the cell and during 2 seconds before DL timing adjustment, the test equipment shall monitor all SRS transmisisons and verify that, for each received SRS, the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB:

   a. The N_{TA} offset value (in T_c units) is 25600 for FR1.

   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 4.4.1.1.5-4.

6. The test system shall adjust the timing of the DL path by values given in Table 4.4.1.1.4.2-1. For Test 2, the DL timing change shall be applied within the first half of the DRX cycle upon expiration of the preceding DRX ON duration.

Table 4.4.1.1.4.2-1: Adjustment Value for DL Timing

SCS of SSB signals (KHz)	Adjustment Value	
	Test1	Test2
15	+64*64Tc	+32*64Tc
30	+32*64Tc	+16*64Tc

7. The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Table 4.4.1.1.5-5. This will only be done for Test1. The test system samples the UE Transmit Timing once per SRS transmission (as per configured SRS periodicity). To check Rule 1, the SS shall check that the maximum time adjustment step size T_q between one SRS transmission to next consecutive SRS transmission of a valid UL slot is within Rule 1 as specified in clause 4.4.1.0.1 and Table 4.4.1.0.1-3. To check that the minimum adjustment rate is within Rule 2 as specified in clause 4.4.1.0.1 and Table 4.4.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 1 + offset seconds sliding window (offset in ms to the next consecutive SRS transmission), with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. To check that the maximum adjustment rate is within Rule 3 as specified in clause 4.4.1.0.1 and Table 4.4.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 200ms - offset sliding window of previous SRS transmission, with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. The three rules apply until the UE transmit timing offset is within the limits specified in 4.4.1.0.1 and Table 4.4.1.0.1-3 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1. The test system will wait till evaluation interval of T seconds is met to ensure UE transmit timing is stable at the end of the step, where T=.DL_timing_change[Ts]/5.5Ts and DL_timing_change is specified in Table 4.4.1.1.4.2-1.

8. After the UE transmit timing is within the limits specified in step 7, and during 2 seconds, the test system shall monitor all SRS transmissions and verify that, for each received SRS, the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

4.4.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.4.1.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1

Table 4.4.1.1.4.3-1: *SRS-Config* : Additional test requirement for UE transmit timing accuracy for EN-DC FR1 UE

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {			
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {			
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	14		SCS15
	25		SCS30
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
sl1	0		Test 1
sl320	3		Test 2 and SCS15
sl640	5		Test 2 and SCS30
}			
}			
}			
}			
}			
}			

Table 4.4.1.1.4.3-2: *DRX-Config* : Additional test requirement for UE transmit timing accuracy Test 2 for EN-DC FR1

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
DRX-Config ::= CHOICE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms6		
}			
drx-InactivityTimer	ms1		
drx-HARQ-RTT-TimerDL	56		
drx-HARQ-RTT-TimerUL	56		
drx-RetransmissionTimerDL	sl1		

drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms320	0		
}			
shortDRX		NOT PRESENT	
}			

4.4.1.1.5 Test Requirements

Table 4.4.1.1.5-1: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2	Band Group
SSB ARFCN		1,2,3,4,5,6	Freq1	Freq1	
Duplex Mode		1,4	FDD		
		2,3,5,6	TDD		
TDD configuration		1,4	Not Applicable		
		2,5	TDDConf.1.1		
		3,6	TDDConf.2.1		
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52		
		2,5	10: $N_{RB,c}$ = 52		
		3,6	40: $N_{RB,c}$ = 106		
Initial BWP Configuration		1,2,3,4,5,6	DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration		1,2,3,4,5,6	DLBWP.1.1 ULBWP.1.1		
DRx Cycle	ms	1,2,3,4,5,6	N/A	DRX.8 Note5	
PDSCH Reference measurement channel		1,4	SR.1.1 FDD		
		2,5	SR.1.1 TDD		
		3,6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD		
		2,5	CR.1.1 TDD		
		3,6	CR.2.1 TDD		
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD		
		2,5	CCR.1.1 TDD		
		3,6	CCR.2.1 TDD		
OCNG Patterns		1,2,3,4,5,6	OP.1		
SSB configuration		1,4	SSB.1 FR1		
		2,5	SSB.1 FR1		
		3,6	SSB.2 FR1		
SMTC configuration		1,2,3,4,5,6	SMTC.2		
TRS configuration		1,4	TRS.1.1 FDD		
		2,5	TRS.1.1 TDD		
		3,6	TRS.1.2 TDD		
PDSCH/PDCCH subcarrier spacing	kHz	1,2,4,5	15		
		3,6	30		
EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	dBm/15 kHz	1,2,3,4,5,6	-98	-98	

Parameter	Unit	Config	Test1	Test2	Band Group
N_{oc} Note2	dBm/SCS	1,2,4,5	-98	-98	
		3,6	-95	-95	
$\hat{E}_s / I_{ot}$		1,2,3,4,5,6	3.3	3.3	
$\hat{E}_s / N_{oc}$		1,2,3,4,5,6	3.3	3.3	
SS-RSRP Note3	dBm/SCS	1,2,4,5	-95	-95	
		3,6	-92	-92	
Io Note3	dBm/9.36MHz	1,2,4,5	-65.08	-65.08	
	dBm/38.1MHz	3,6	-61.99	-61.99	
Propagation condition		1,2,3,4,5,6	AWGN		
SRS Config		1,2,4,5	SRSConf.1 Note6	SRSConf.3 Note6	
		3, 6	SRSConf.1 Note6	SRSConf.2 Note6	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: DRx related parameters are given in Table 4.4.1.1.5-3.
NOTE 6: SRS configs are given in Table 4.4.1.1.5-2.

Table 4.4.1.1.5-2: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	SRSConf.3	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	0	
	srs-ResourceIdList	0	0	0	
	resourceType	Periodic	Periodic	Periodic	
	Usage	Codebook	Codebook	Codebook	
	SRS-ResourceSetId	0	0	0	
SRS-Resource	nrofSRS-Ports	Port1	Port1	Port1	
	transmissionComb	n2	n2	n2	
	combOffset-n2	0	0	0	
	cyclicShift-n2	0	0	0	
	resourceMapping startPosition	0	0	0	
	resourceMapping nrofSymbols	n1	n1	n1	
	resourceMapping repetitionFactor	n1	n1	n1	
	freqDomainPosition	0	0	0	
	freqDomainShift	0	0	0	
	freqHopping c-SRS	14 for test configuration 1,2,4,5 25 for test configuration 3,6	25	14	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	0	
	freqHopping b-hop	0	0	0	
	groupOrSequenceHopping	Neither	Neither	Neither	
	resourceType	Periodic	Periodic	Periodic	
	periodicityAndOffset-p	sl1	sl640,5	sl320, 3	Offset to align with DRx periodicity
	sequenceId	0	0	0	Any 10 bit number

Table 4.4.1.1.5-3: DRX-Configuration for UL Timing Tests

Field	Test 2

	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
longDRX-CycleStartOffset	320 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
NOTE: The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [13].	

Table 4.4.1.1.5-4: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (KHz)	SCS of uplink signals s(KHz)	T_e
1	15	15	$13.75*64*T_c$
		30	$11.75*64*T_c$
		60	$11.75*64*T_c$
	30	15	$9.75*64*T_c$
		30	$9.75*64*T_c$
		60	$8.75*64*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [6].			

Table 4.4.1.1.5-5: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (KHz)	T_q	T_p	Maximum Adjustment Rate
1	15	$6.0*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
	30	$6.0*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
	60	$6.0*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [6].				

4.4.2 UE timer accuracy

4.4.3 Timing advance

4.4.3.0 Minimum conformance requirements

The timing advance is initiated from PSCell in EN-DC operation mode with MAC message that implies and adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [12].

4.4.3.0.1 Minimum conformance requirements for timing advance adjustment accuracy

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 4.4.3.0.1-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS38.213 [8].

Table 4.4.3.0.1-1: UE Timing Advance adjustment accuracy

Sub Carrier Spacing, SCS kHz	15	30	60	120
UE Timing Advance adjustment accuracy	±256 T_c	±256 T_c	±128 T_c	±32 T_c

4.4.3.0.2 Minimum conformance requirements for timing advance adjustment delay

UE shall adjust the timing of its uplink transmission timing at time slot *n*+ *k* for a timing advance command received in time slot *n*, and the value of *k* is defined in clause 4.2 in TS 38.213 [8]. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

The normative reference for this requirement is TS.38.133 [6] clause A.4.4.3.1.

4.4.3.1 EN-DC FR1 timing advance adjustment accuracy

4.4.3.1.1 Test purpose

The purpose of the test is to verify UE timing advance adjustment delay and accuracy requirement defined in clause 7.3 of TS 38.133 [6].

4.4.3.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

4.4.3.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 4.4.3.0.1 and clause 4.4.3.0.2.

The normative reference for this requirement is TS.38.133 [6] clause A.4.4.3.1.

4.4.3.1.4 Test description

4.4.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.4.3.1.4.1-1.

Table 4.4.3.1.4.1-1: EN-DC FR1 timing advance adjustment accuracy supported test configurations

Test Case ID	Description
4.4.3.1.4.1-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.4.3.1.4.1-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.4.3.1.4.1-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.4.3.1.4.1-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.4.3.1.4.1-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.4.3.1.4.1-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.4.3.1.4.1-2

Table 4.4.3.1.4.1-2: Initial conditions for EN-DC FR1 timing advance adjustment accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, E.1.2, and Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.4.3.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 4.4.3.1.4.1-3: General test parameters for timing advance

Parameter	Unit	Value	Comment

RF channel number		Cell 1: 1 Cell 2: 2	1 for E-UTRAN Pcell 2 for NR PSCell
DL BWP		DLBWP.1.1	As specified in Table A.8.1-2
UL BWP		ULBWP.1.1	As specified in Table A.8.2-2
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For SCS = 15kHz, $N_{TA_new} = N_{TA_old}$ + $8192*T_c$ (based on equation in TS 38.213 [8] clause 4.2) For SCS = 30kHz, $N_{TA_new} = N_{TA_old}$ + $4096*T_c$ (based on equation in TS 38.213 [8] clause 4.2)
T1	S	5	
T2	S	5	

1. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.1.

2. Downlink signals for NR cell are initially set up according to clauses C.1.2 and C.1.3.

4.4.3.1.4.2 Test Procedure

The test consists of two cells, a single E-UTRA cell (PCell), and a single NR cell (PSCell). Cell 1 is the PCell in the primary Timing Advance Group (pTAG) and cell 2 is the PSCell is in the secondary Timing Advance Group (sTAG). The test consists of two successive time periods, with time durations of T1 and T2 respectively. In each time period, timing advance commands for sTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in Table 4.4.3.1.4.1-3 and Table 4.4.3.1.5-2, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PSCell in sTAG. The UE Time Alignment Timer (timeAlignmentTimer IE), described in Clause 5.2 in TS 38.321 [12], shall be configured so that it does not expire in the duration of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Message content are defined in clause 4.4.3.1.4.3.

2. Set the parameters according to values in Tables 4.4.3.1.4.1-3 and Table 4.4.3.1.5-1 as appropriate. Propagation conditions are set according to clause C.2.2.

3. SS shall transmit an RRCConnectionReconfiguration message.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for sTAG, as specified in clause 6.1.3.4 in TS 38.321 [12]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [8] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for sTAG used by the UE is established.

6. During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value of 39 as specified in Table 4.4.3.1.4.1-3.

7. This value shall result in changes of the timing advance for sTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

8. As specified in clause 7.3.2.1 of TS 38.133 [6], the UE adjusts its uplink timing at slot n+k+1 for a timing advance command received in slot n. This delay should be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

9. The UE Time Alignment Timer, described in clause 5.2 in TS 38.321 [12], shall be configured so that it does not expire in the duration of the test.

10. The result from the SRS and adjustment of the timing advance in step 7) is used to measure that the UE adjusts the timing of its transmission with a relative accuracy better than or equal to value specified in Table 4.4.3.0.1-1 to the signalled timing advance value compared to the timing of preceding uplink transmission.

11. If the UE adjust the timing of its transmission within a relative accuracy greater than or equal to value specified in Table 4.4.3.0.1-1 to the signalled timing advance value compared to the timing of preceding uplink transmission then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

12. The SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

13. The SS then shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

14. If any of the above Reconfiguration in Step 12 or 13 fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

15. Repeat steps 3-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.4.3.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3, with the following exceptions:

Table 4.4.3.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1

Table 4.4.3.1.4.3-1: srs-Config setup

Derivation Path: TS 38.508-1, Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {	1 entry		
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {	1 entry		
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	12		Config 1,2,4,5
	24		Config 3,6
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
sl5	2	Once every 5	SCS15

Derivation Path: TS 38.508-1, Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
		Slots	
sl5	4	Once every 5 Slots	SCS30
}			
}			
}			
}			
}			
}			

4.4.3.1.5 Test Requirement

The UE shall apply the signalled Timing Advance value for PSCell in sTAG to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where:

k = 5 for Config 1, 2, 3, 4, 5, 6

The Timing Advance adjustment accuracy for PSCell in sTAG shall be within the limits specified in Table 4.4.3.1.5-3.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90 %.

Table 4.4.3.1.5-1 and Table 4.4.3.1.5-2 define the primary level settings.

Table 4.4.3.1.5-1: Cell specific test parameters for timing advance

Parameter		**Unit**	**Test1**	
			T1	**T2**
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		40: $N_{RB,c}$ = 106	
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		40: $N_{RB,c}$ = 106	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	
	Config 2,5		CCR.1.1 TDD	
	Config 3,6		CCR2.1 TDD	
OCNG Patterns			OCNG pattern 1	
TRS configuration	Config 1,4		TRS.1.1 FDD	
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
SMTC configuration	Config 1,2,4,5		SMTC.1 FR1	
	Config 3,6		SMTC.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30 kHz	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				

Parameter		Unit	Test1	
			T1	T2
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-98	
	Config 3,6		-95	
$\hat{E}_s / I_{ot}$		dB	3	
$\hat{E}_s / N_{oc}$		dB	3	
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-67.57	
	Config 3,6	dBm/ 38.16MHz	-62.58	
Propagation condition		-	AWGN	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 4.4.3.1.5-2: Sounding Reference Symbol Configuration for timing advance

Field		Value	Comment
c-SRS	Config 1,2,4,5	12	Frequency hopping is disabled
	Config 3,6	24	
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5@2 for SCS 15kHz sl5@4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
Usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission

NOTE: For further information see clause 6.3.2 in TS 38.331.

Table 4.4.3.1.5-3: UE Timing Advance adjustment accuracy

Sub Carrier Spacing, SCS kHz	15	30	60
UE Timing Advance adjustment accuracy	±344 T_c	±344 T_c	±216 T_c

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95 %.

4.5 Signaling characteristics

4.5.1 Radio link monitoring

4.5.1.00 General

The requirements in this section apply for radio link monitoring on PSCell in EN-DC operation mode.

The UE shall monitor the downlink link quality based on the reference signal in the configured RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell and PSCell as specified in TS 38.213 [8]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell.

4.5.1.0 Minimum conformance requirements

4.5.1.0.1 Minimum conformance requirements for out-of-sync SSB-based RLM

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB}$ [ms] period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB}$ [ms] evaluation period. The requirements in this section apply for each SSB based RLM-RS resource configured for PSCell, provided that the SSB configured for RLM is transmitted within UE active DL BWP during the entire evaluation period defined in Table 4.5.1.0.1-1.

$T_{Evaluate_out_SSB}$ is defined in Table 4.5.1.0.1-1 for FR1.

Table 4.5.1.0.1-1: Evaluation period $T_{Evaluate_out}$ for FR1

Configuration	$T_{Evaluate_out_SSB}$ (ms)
no DRX	max(200,ceil(10*P)*T_{SSB})
DRX cycle≤320	max(200,ceil(15*P)*max(T_{DRX},T_{SSB}))
DRX cycle>320	ceil(10*P)*T_{DRX}
NOTE: T_{SSB} is the periodicity of SSB configured for RLM. T_{DRX} is the DRX cycle length	

For FR1,

- P=1/(1 - T_{SSB}/MGRP), when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

If the high layer in TS 38.331 [13] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; otherwise $T_{SMTCperiod}$ follows *smtc1*.

The normative reference for this requirement is TS 38.133 [6] clause 8.1.2.

4.5.1.0.2 Void

4.5.1.0.3 Minimum conformance requirements for out-of-sync CSI-RS based RLM

[TS 38.133, clause 8.1.3.1]

The requirements apply for each CSI-RS based RLM-RS resource configured for PSCell, provided that the CSI-RS configured for RLM are actually transmitted within UE active DL BWP during the entire evaluation period specified in TS 38.133, clause 8.1.3.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

[TS 38.133, clause 8.1.3.2]

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI-RS}$ [ms] period becomes worse than the threshold Q_{out_CSI-RS} within $T_{Evaluate_out_CSI-RS}$ [ms] evaluation period.

- $T_{Evaluate_out_CSI-RS}$ is defined in Table 4.5.1.0.3-1 for FR1.

For FR1,

- $P=1/(1 - T_{CSI-RS}/MGRP)$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

The value of M_{out} used in Table 4.5.1.0.3-1 is defined as:

- M_{out} = 20 if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* set to 3 and over the bandwidth $\geqslant$ 24 PRBs.

Table 4.5.1.0.3-1: Evaluation period $T_{Evaluate_out_CSI-RS}$ for FR1

Configuration	$T_{Evaluate_out_CSI-RS}$ (ms)
no DRX	$\max(200, \text{ceil}(M_{out}\times P)\times T_{CSI-RS})$
DRX ≤ 320ms	$\max(200, \text{ceil}(1.5\times M_{out}\times P)\times \max(T_{DRX}, T_{CSI-RS}))$
DRX > 320ms	$\text{ceil}(M_{out}\times P) \times T_{DRX}$
NOTE: T_{CSI-RS} is the periodicity of CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.	

[TS 38.133, clause 8.1.3.3]

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM/BFD/CBD/L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM/BFD/CBD/L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM/BFD/CBD/L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM/BFD/CBD/L1-RSRP measurement, UE shall be able to measure the CSI-RS for RLM without any restriction.

[TS 38.133, clauses 8.1.4 and 8.1.5]

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM-RS resources to a second configuration of RLM-RS resources that is different from the first configuration, for each RLM-RS resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM-RS resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for RLM present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331.

[TS 38.133, clause 8.1.6]

When the downlink radio link quality on all the configured RLM-RS resources is worse than Q_{out}, Layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331.

The out-of-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213. Two successive indications from Layer 1 shall be separated by at least $T_{Indication_interval}$.

When DRX is not used $T_{Indication_interval}$ is max(10ms, $T_{RLM\text{-}RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1.2 if the RLM-RS resource is SSB, or $T_{CSI\text{-}RS}$ specified in clause 8.1.3 if the RLM-RS resource is CSI-RS.

In case DRX is used, $T_{Indication_interval}$ is max(10ms, 1.5*DRX_cycle_length, 1.5*$T_{RLM\text{-}RS,M}$) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and Layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

References: The conformance requirements covered in the current TC are specified in: TS 38.133 [6], clauses 8.1.3, 8.1.4, 8.1.5 and 8.1.6.

4.5.1.0.4 Minimum conformance requirements for in-sync CSI-RS based RLM

[TS 38.133, clause 8.1.3.1]

The requirements apply for each CSI-RS based RLM-RS resource configured for PSCell, provided that the CSI-RS configured for RLM are actually transmitted within UE active DL BWP during the entire evaluation period specified in TS 38.133 clause 8.1.3.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

[TS 38.133, clause 8.1.3.2]

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_CSI\text{-}RS}$ [ms] period becomes better than the threshold $Q_{in_CSI\text{-}RS}$ within $T_{Evaluate_in_CSI\text{-}RS}$ [ms] evaluation period.

- $T_{Evaluate_in_CSI\text{-}RS}$ is defined in Table 8.1.3.2-1 for FR1.

For FR1,

- P=1/(1 - $T_{CSI\text{-}RS}$/MGRP), when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

The value of M_{in} used in Table 8.1.3.2-1 is defined as:

- M_{in} = 10, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* set to 3 and over the bandwidth ≥ 24 PRBs.

Table 8.1.3.2-1: Evaluation period $T_{Evaluate_in_CSI\text{-}RS}$ for FR1

Configuration	$T_{Evaluate_in_CSI\text{-}RS}$ (ms)
no DRX	max(100, ceil(M_{in}×P) × $T_{CSI\text{-}RS}$)
DRX ≤ 320ms	max(100, ceil(1.5×M_{in}×P)× max(T_{DRX}, $T_{CSI\text{-}RS}$))
DRX > 320ms	ceil(M_{in}×P) × T_{DRX}
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource configured for RLM. The requirements in this table apply for $T_{CSI\text{-}RS}$ equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.	

[TS 38.133, clause 8.1.3.3]

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM/BFD/CBD/L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM/BFD/CBD/L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM/BFD/CBD/L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM/BFD/CBD/L1-RSRP measurement, UE shall be able to measure the CSI-RS for RLM without any restriction.

[TS 38.133, clauses 8.1.4 and 8.1.5]

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM-RS resources to a second configuration of RLM-RS resources that is different from the first configuration, for each RLM-RS resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period

corresponding to the second configuration for each RLM-RS resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for RLM present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [2].

[TS 38.133, clause 8.1.6]

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than Q_{in}, Layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A Layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from Layer 1 shall be separated by at least $T_{Indication_interval}$.

When DRX is not used $T_{Indication_interval}$ is max(10ms, $T_{RLM-RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1.2 if the RLM-RS resource is SSB, or T_{CSI-RS} specified in clause 8.1.3 if the RLM-RS resource is CSI-RS.

In case DRX is used, $T_{Indication_interval}$ is max(10ms, 1.5*DRX_cycle_length, 1.5*$T_{RLM-RS,M}$) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and Layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

References: The conformance requirements covered in the current TC are specified in: TS 38.133 [6], clauses 8.1.3, 8.1.4, 8.1.5 and 8.1.6.

4.5.1.0.5 Requirements for UE configured with Relaxed Measurement Criteria

[TS 38.133, clause 8.1.1.1]

For the UE supporting rlm-Relaxation-r17 and configured with explicit signalling goodServingCellEvaluationRLM, which is always configured to the UE when the network enables RLM relaxation for the UE as specified in TS 38.331 [13], the relaxed requirements defined in clause 4.5.1.0.5.1 for SSB based radio link monitoring and the relaxed requirements defined in clause [4.5.1.0.5.2] for CSI-RS based radio link monitoring are allowed to apply to the relaxed RLM measurements on SpCell after fulfilling the following conditions:

- for the serving cells in intra-band carrier aggregation configured with SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on SCell, when
- the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [13] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on Scell in the intra-band carrier aggregation if the lowMobilityEvaluationConnected is not configured, or
- the UE is also configured with lowMobilityEvaluationConnected and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [13] is fulfilled for a period of TSearchDeltaP-Connected and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [13] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on Scell in the intra-band carrier aggregation.
- for other serving cells, when
- the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [13] is fulfilled for the SpCell if the lowMobilityEvaluationConnected is not configured, or
- the UE is also configured with lowMobilityEvaluationConnected and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [13] is fulfilled for a period of TSearchDeltaP-Connected and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [13] is fulfilled for the SpCell.

otherwise, UE shall apply the requirements defined in clause 4.5.1.0.1 for SSB based radio link monitoring and the requirements defined in clause 4.5.1.0.3 and 4.5.1.0.4 for CSI-RS based radio link monitoring. Note that when multiple resources are configured on a serving cell for RLM or BFD evaluation, the good serving cell quality criterion is considered as fulfilled for the serving cell when any resource configured for the cell fulfils the good serving defined in clause 5.7.13.2 of TS 38.331 [13].

The UE is no longer allowed to relax RLM measurements and apply the relaxed radio link monitoring provided that at least one of the following conditions is met:

- The UE sends out of sync indications to the higher layers,
- The timer T310 is running.
- No DRX is used or DRX cycle is longer than 80ms4.5.1.0.5.1 Minimum requirement of SSB based radio link monitoring for UE fulfilling relaxed measurement criteria

[TS 38.133, clause 8.1.2.4]

This clause contains minimum requirements for relaxed radio link monitoring based on SSB.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB_Relax}$ [ms] period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB_Relax}$ [ms] evaluation period.

$T_{Evaluate_out_SSB_Relax}$ is defined in Table 4.5.1.0.5.1-1 for FR1.

The value of P is defined in clause 4.5.1.0.1.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 4.5.1.0.5.1-1: Evaluation period $T_{Evaluate_out_SSB_Relax}$ for FR1

Configuration	$T_{Evaluate_out_SSB_Relax}$ (ms)
$Max(T_{DRX},T_{SSB}) \leq 80ms$	$Max(200\times K3^{NOTE3}, Ceil(15 \times K1^{NOTE2} \times P) \times Max(T_{DRX},T_{SSB}))$
$80ms < Max(T_{DRX},T_{SSB}) \leq 160ms$	$Ceil(15 \times P) \times Max(T_{DRX},T_{SSB})$
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length and no longer than 80ms.	
NOTE 2: K1 = 4 for $Max(T_{DRX},T_{SSB}) \leq 40ms$ and K1 = 2 for $40ms<Max(T_{DRX},T_{SSB}) \leq 80ms$.	
NOTE 3: K3 = K1, if K1 ≤ 2; otherwise K3 = 1.	

4.5.1.1 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

4.5.1.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the PSCell configured with SSB-based RLM RS in non-DRX mode. This test will partly verify the FR1 PSCell radio link monitoring requirements in TS 38.133 [6], clause 8.1.2.

4.5.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

4.5.1.1.3 Minimum conformance requirement

The minimum requirements are specified in clause 4.5.1.0.1. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.1.1.

4.5.1.1.4 Test description

There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1 as defined in TS 38.133 [6]. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 4.5.1.1.4-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

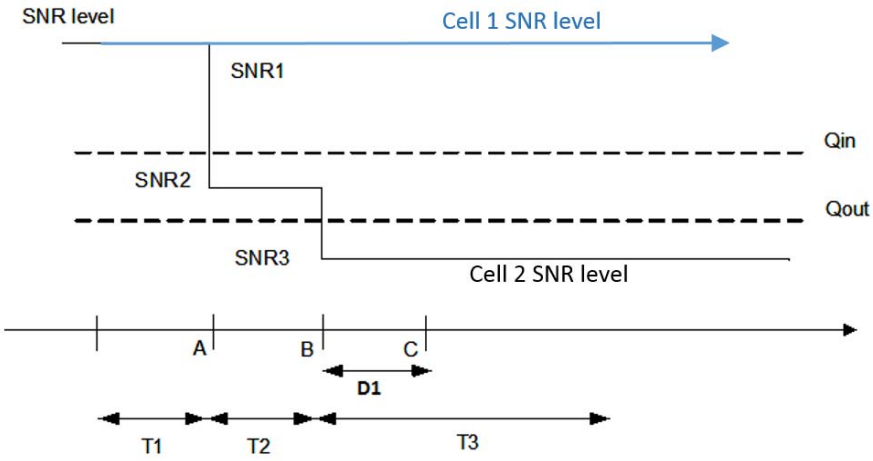

Figure 4.5.1.1.4-1: SNR variation for out-of-sync testing

4.5.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.1.1.4.1-1.

Table 4.5.1.1.4.1-1: EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode supported test configurations

Test Case ID	Description
4.5.1.1-1	LTE FDD, NR 15 KHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.1-2	LTE FDD, NR 15 KHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.1-3	LTE FDD, NR 30 KHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.1.1-4	LTE TDD, NR 15 KHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.1-5	LTE TDD, NR 15 KHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.1-6	LTE TDD, NR 30 KHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.1.1.4.1-2.

Table 4.5.1.1.4.1-2: Initial conditions for EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 4.5.1.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

Table 4.5.1.1.4.1-3: Void

1. Message contents are defined in clause 4.5.1.1.4.3.
2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2.
3. The test parameters are given in Table 4.5.1.1.4.1-4 below.
4. Downlink signals for NR cell are initially set up according to clauses C.1.2 and C.1.3.

Table 4.5.1.1.4.1-4: General test parameters for FR1 out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2, 5		10: $N_{RB,c}$ = 52
	Config 3, 6		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2, 5		CCR.1.3 TDD
	Config 3, 6		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
PRACH Configuration	Config 1, 2, 4, 5		Table A.7.1-1, PRACH.1 FR1
	Config 3, 6		Table A.7.1-1, PRACH.1 FR1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

Parameter			Unit	Value
				Test 1
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				*gp0*
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS configuration		Config 1, 4		CSI-RS.1.1 FDD
		Config 2, 5		CSI-RS.1.1 TDD
		Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking		Config 1, 4		TRS.1.1 FDD
		Config 2, 5		TRS.1.1 TDD
		Config 3, 6		TRS.1.2 TDD
T1			s	0.2
T2			s	0.48
T3			s	0.48
D1			s	0.44
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 3: E-UTRAN is in non-DRX mode under test.				

4.5.1.1.4.2 Test Procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 4.5.1.1.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. The SS shall transmit an *RRCConnectionReconfiguration* message configuring the UE for inter-frequency measurements.

3. The UE shall transmit *RRCReconfigurationComplete* message.

4. Set the parameters according to T1 in Table 4.5.1.1.5-1 for subtest 1 and 2. Propagation conditions are set according to clause C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.1.1.5-1 for subtests 1 and 2. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.1.1.5-1 for subtests 1 and 2. T3 starts.

7. If the SS:

   a) detects uplink power equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point B; and

   b) does not detect any uplink power higher than OFF power defined in TS 38.521-1 [17] clause 6.3.2.5 from time point C (D1 after the start of T3) until T3 expires, the number of successful tests is increased by one.

8. Otherwise the number of failed tests is increased by one and proceed to Step 12.

9. When T3 expires the SS shall change the SNR value to T1 as specified in Table 4.5.1.1.5-1.
10. If the UE has not re-established the connection in at least 1s, the SS shall ensure PSCell is released.
11. The SS then shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.
12. If the Reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
13. Repeat steps 4-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.1.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and 7.3.1 with condition "Short_DCI" and with the following exceptions.

Table 4.5.1.1.4.3-1: Common Exception messages for EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier center of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.4-1 Table H.3.4-1a Table H.3.4-4 with condition gapUE Table H.3.4-5 with condition BFD Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM

Table 4.5.1.1.4.3-2: Void

Table 4.5.1.1.4.3-3: *RLF-TimersAndConstant*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

4.5.1.1.5 Test Requirement

Table 4.5.1.1.5-1 defines the cell specific primary level settings.

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows.

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90 %.

Table 4.5.1.1.5-1: Cell specific test parameters for FR1 (Cell 2) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1.8	-6.2	-15.8
	Config 2, 5		1.8	-6.2	-15.8
	Config 3, 6		1.8	-6.2	-15.8
N_{oc}	Config 1, 4	dBm/15 KHz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		
Propagation condition			TDL-C 300ns 100Hz		
NOTE 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. NOTE 3: SNR levels correspond to the signal to noise ratio over the SSS REs. NOTE 4: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR during T3 from D.4.1.1 is -18 -TT, which is -18.9dB (including test tolerances)					

Table 4.5.1.1.5-2: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
NOTE: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap).	

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95 %.

4.5.1.2 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

4.5.1.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects in sync, for the purpose of monitoring downlink radio link quality of the PSCell, when DRX is not used. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 8.1.2.

4.5.1.2.2 Test applicability

This test applies to all types of E-UTRA UEs Release 15 and forward supporting EN-DC.

4.5.1.2.3 Minimum conformance requirements

The minimum requirements are specified in clause 4.5.1.0.2. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.1.2.

4.5.1.2.4 Test description

There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 4.5.1.2.4-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

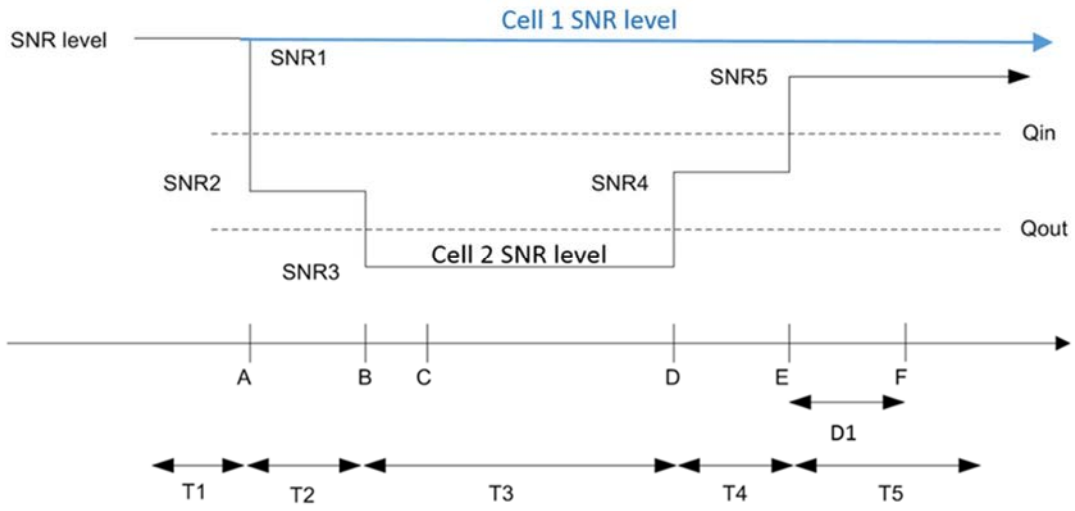

Figure 4.5.1.2.4-1: SNR variation for in-sync testing

4.5.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.1.2.4.1-1.

Table 4.5.1.2.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
4.5.1.2-1	LTE FDD, NR 15 KHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.2-2	LTE FDD, NR 15 KHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.2-3	LTE FDD, NR 30 KHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.1.2-4	LTE TDD, NR 15 KHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.2-5	LTE TDD, NR 15 KHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.2-6	LTE TDD, NR 30 KHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.1.2.4.1-2.

Table 4.5.1.2.4.1-2: Initial conditions for EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.1.2.5-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.

Diagram	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

Table 4.5.1.2.4.1-3: Void

1. Message contents are defined in clause 4.5.1.2.4.3.
2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2
3. The general test parameters are given in Table 4.5.1.2.4.1-4.
4. Downlink signals for NR cell are initially set up according to clause C.1.

Table 4.5.1.2.4.1-4: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2, 5		10: $N_{RB,c}$ = 52
	Config 3, 6		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
PRACH Configuration	Config 1, 2, 4, 5		Table A.7.1-1, PRACH.1 FR1
	Config 3, 6		Table A.7.1-1, PRACH.1 FR1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync	DCI format		1-0

Parameter		Unit	Value
			Test 1
transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 3: E-UTRAN is in non-DRX mode under test.			

4.5.1.2.4.2 Test procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 4.5.1.2.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Set the parameters according to T1 in Table 4.5.1.2.5-1 for subtest 1 and 2. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires, the SS shall change the SNR value to T2 as specified in Table 4.5.1.2.5-1. T2 starts.

4. When T2 expires, the SS shall change the SNR value to T3 as specified in Table 4.5.1.2.5-1. T3 starts.
5. When T3 expires, the SS shall change the SNR value to T4 as specified in Table 4.5.1.2.5-1. T4 starts.
6. When T4 expires, the SS shall change the SNR value to T5 as specified in Table 4.5.1.2.5-1. T5 starts.
7. If the SS detects uplink power equal to or higher than the minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in the subframe according the configured CSI reporting during the period from time point A to time point F (D1 after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.
8. If the iteration fails, the SS shall first attempt to release and add the PSCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.
9. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.1.2.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and clause 7.3.1 with condition "Short_DCI" with the following exceptions.

Table 4.5.1.2.4.3-1: Common Exception messages for EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM

Table 4.5.1.2.4.3-2: Void

Table 4.5.1.2.4.3-3: *RLF-TimersAndConstant*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms1000		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

4.5.1.2.5 Test Requirement

The requirements in this section apply for each SSB based RLM-RS resource configured for PCell or PSCell, provided that the SSB configured for RLM are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 4.5.1.2.3.

Table 4.5.1.2.5-1 defines the cell specific primary level settings.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows.

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence interval of 95 %.

Table 4.5.1.2.5-1: Cell specific test parameters for FR1 (Cell 2) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1.8	-6.2	-15.8	-5.3	1.8
	Config 2, 5		1.8	-6.2	-15.8	-5.3	1.8
	Config 3, 6		1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1, 4	dBm/15 KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 4.5.1.2.4-1.
NOTE 5: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR during T3 and T4 from D.4.1.1 are -18.0-TT and -8.0-TT, which are -18.8 dB and -8.8 dB(including test tolerances).

4.5.1.3 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode

4.5.1.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the PSCell configured with SSB-based RLM RS when DRX is used. This test will partly verify the NR cell radio link monitoring requirements in TS 38.133 [6] clause 8.1.

4.5.1.3.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR1 and long DRX cycle.

4.5.1.3.3 Minimum conformance requirement

The minimum requirements are specified in clause 4.5.1.0.1. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.1.3.

4.5.1.3.4 Test description

There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1 as defined in TS 38.133 [6]. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 4.5.1.3.4-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH

and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

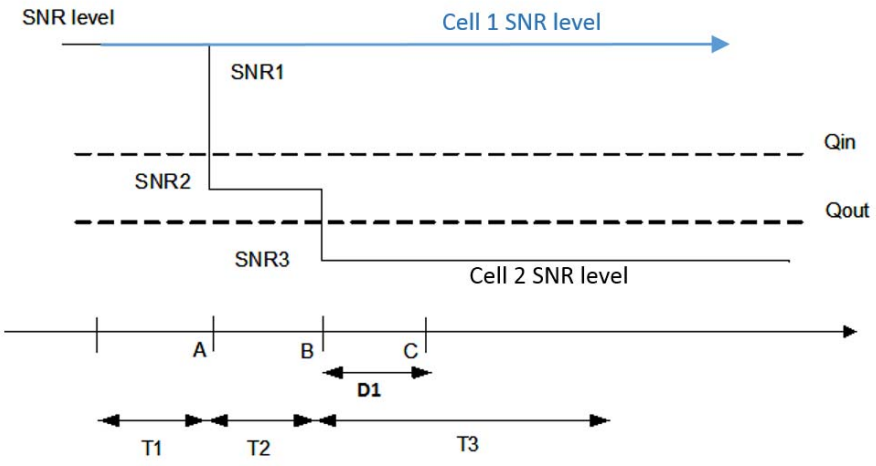

Figure 4.5.1.3.4-1: SNR variation for out-of-sync testing

4.5.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.1.3.4.1-1.

Table 4.5.1.3.4.1-1: EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode supported test configurations

Test Case ID	Description
4.5.1.3-1	LTE FDD, NR 15 KHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.3-2	LTE FDD, NR 15 KHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.3-3	LTE FDD, NR 30 KHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.1.3-4	LTE TDD, NR 15 KHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.3-5	LTE TDD, NR 15 KHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.3-6	LTE TDD, NR 30 KHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.1.3.4.1-2.

Table 4.5.1.3.4.1-2: Initial conditions for EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.1.3.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

Table 4.5.1.3.4.1-3: Void

1. Message contents are defined in clause 4.5.1.3.4.3.

2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2.

3. The test parameters are given in Table 4.5.1.3.4.1-4.

4. Downlink signals for NR cell are initially set up according to clauses C.1.2 and C.1.3.

Table 4.5.1.3.4.1-4: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52
	Config 2, 5		10: $N_{RB,c}$ = 52
	Config 3, 6		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2, 5		CCR.1.3 TDD
	Config 3, 6		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
PRACH Configuration	Config 1, 2, 4, 5		Table A.7.1-1, PRACH.1 FR1
	Config 3, 6		Table A.7.1-1, PRACH.1 FR1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3

Parameter		Unit	Value
			Test 1
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 3: E-UTRAN is in non-DRX mode under test.			

4.5.1.3.4.2 Test Procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 4.5.1.3.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Set the parameters according to T1 in Table 4.5.1.3.5-1 for subtest 1 and 2. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.1.3.5-1 for subtests 1 and 2. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.1.3.5-1 for subtests 1 and 2. T3 starts.

5. If the SS:

   a) detects uplink power equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point B; and

   b) does not detect any uplink power higher than OFF power defined in TS 38.521-1 [17] clause 6.3.2.5 from time point C (D1 after the start of T3) until T3 expires, the number of successful tests is increased by one.

6. Otherwise the number of failed tests is increased by one, and proceed to Step 10.

7. When T3 expires the SS shall change the SNR value to T1 as specified in Table 4.5.1.3.5-1.

8. If the UE has not re-established the connection in at least 1s, the SS shall ensure that PSCell is released.

9. The SS then shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

10. If the Reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.1.3.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and 7.3.1 with condition "Short_DCI" and with the following exceptions:

Table 4.5.1.3.4.3-0: Common Exception messages for EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table H.3.7-1 with condition DRX.3

Table 4.5.1.3.4.3-1: Void

Table 4.5.1.3.4.3-2: RLF-TimersAndConstant

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

4.5.1.3.5 Test Requirement

Table 4.5.1.3.5-1 defines the cell specific primary level settings.

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90 %.

Table 4.5.1.3.5-1: Cell specific test parameters for FR1 (Cell 2) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1.8	-6.2	-15.8
	Config 2, 5		1.8	-6.2	-15.8
	Config 3, 6		1.8	-6.2	-15.8
N_{oc}	Config 1, 4	dBm/15	-98		

Parameter		Unit	Test 1		
			T1	T2	T3
	Config 2, 5	KHz	-98		
	Config 3, 6		-98		
Propagation condition			TDL-C 300ns 100Hz		
NOTE 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
NOTE 3: SNR levels correspond to the signal to noise ratio over the SSS REs.					
NOTE 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure 4.5.1.3.4-1.					
NOTE 5: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR during T3 from D.4.1.1, is -18dB-TT = -18.9dB (including test tolerances).					

For the test to pass, the total number of successful tests shall be more than 90 % of the cases with a confidence level of 95 %.

4.5.1.4 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode

4.5.1.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in TS 38.133 [6] clause 8.1.

4.5.1.4.2 Test applicability

This test applies to all types of E-UTRA UE Release 15 and forward supporting EN-DC FR1 and long DRX cycle.

4.5.1.4.3 Minimum conformance requirements

The minimum requirements are specified in clause 4.5.1.0.2. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.1.4.

4.5.1.4.4 Test Description

There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 4.5.1.4.4-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

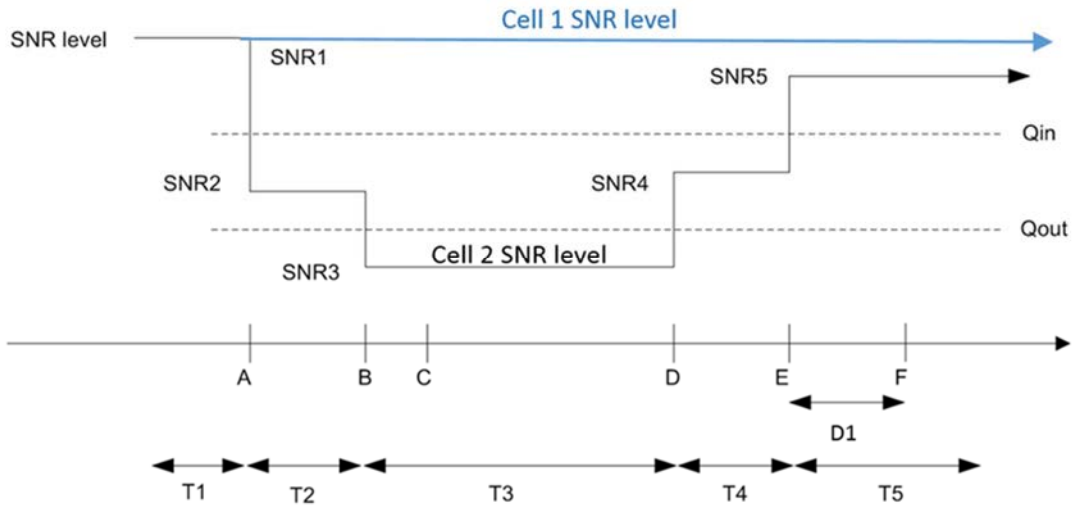

Figure 4.5.1.4.4-1 - SNR variation for in-sync testing

4.5.1.4.4.1 Initial Conditions

This test shall be tested using any of the test configurations in Table 4.5.1.4.4.1-1.

Table 4.5.1.4.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
4.5.1.4-1	LTE FDD, NR 15 KHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.4-2	LTE FDD, NR 15 KHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.4-3	LTE FDD, NR 30 KHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.1.4-4	LTE TDD, NR 15 KHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.4-5	LTE TDD, NR 15 KHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.4-6	LTE TDD, NR 30 KHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.1.4.4.1-2.

Table 4.5.1.4.4.1-2: Initial conditions for EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.1.4.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

Table 4.5.1.4.4.1-3: Void

1. Message contents are defined in clause 4.5.1.4.4.3.

2. The power levels and settings for Cell 1 are set according to clause A.6, Table A.6.1.1-1. Cell 2 is NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2.

3. The general test parameters are given in Table 4.5.1.4.4.1-4 below.

4. Downlink signals for NR cell are initially set up according to clause C.1.

Table 4.5.1.4.4.1-4: General test parameters for FR1 in-sync testing in DRX mode

Parameter			Unit	Value
				Test 1
Active E-UTRA PCell				Cell 1
E-UTRA RF Channel Number				1
Active PSCell				Cell 2
RF Channel Number				2
Duplex mode		Config 1, 4		FDD
		Config 2, 3, 5, 6		TDD
$BW_{channel}$		Config 1, 4	MHz	10: $N_{RB,c}$ = 52
		Config 2, 5		10: $N_{RB,c}$ = 52
		Config 3, 6		40: $N_{RB,c}$ = 106
DL initial BWP configuration		Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration		Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration		Config 1, 4		Not Applicable
		Config 2, 5		TDDConf.1.1
		Config 3, 6		TDDConf.2.1
RMSI CORESET Reference Channel		Config 1, 4		CR.1.1 FDD
		Config 2, 5		CR.1.1 TDD
		Config 3, 6		CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1, 4		CCR.1.1 FDD
		Config 2, 5		CCR.1.1 TDD
		Config 3, 6		CCR.2.1 TDD
SSB Configuration		Config 1, 4		SSB.1 FR1
		Config 2, 5		SSB.1 FR1
		Config 3, 6		SSB.2 FR1
SMTC Configuration		Config 1, 2, 4, 5		SMTC.1
		Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2, 4, 5		15 KHz
		Config 3, 6		30 KHz
PRACH Configuration		Config 1, 2, 4, 5		Table A.7.1-1, PRACH.1 FR1
		Config 3, 6		Table A.7.1-1, PRACH.1 FR1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH		dB	4

Parameter		Unit	Value
			Test 1
	DMRS energy to average SSS RE energy		
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.64
T4		s	0.2
T5		s	0.88
D1		s	0.84
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 3: E-UTRAN is in non-DRX mode under test.			

4.5.1.4.4.2 Test Procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 4.5.1.4.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Set the parameters according to T1 in Table 4.5.1.4.5-1 for subtest 1 and 2. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.1.4.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.1.4.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 4.5.1.4.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 4.5.1.4.5-1. T5 starts.

7. If the SS detects uplink power equal to or higher than the minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in the On-duration part of every DRX cycle in the subframe according the configured CSI reporting mode (PUCCH 1-0) during the period from time point A to time point F (D1 after the start of time duration T5) the number of successful tests is increased by one.

Otherwise the number of failed tests is increased by one.

8. If the iteration fails, the SS shall first attempt to release and add the PSCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.

9. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.1.4.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and 7.3.1 with condition "Short_DCI" and with the following exceptions.

Table 4.5.1.4.4.3-0: Common Exception messages for EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table H.3.7-1 with condition DRX.3

Table 4.5.1.4.4.3-1: Void

Table 4.5.1.4.4.3-2: RLF-TimersAndConstant

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms1000		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

4.5.1.4.5 Test Requirement

The requirements in this section apply for each SSB based RLM-RS resource configured for PCell or PSCell, provided that the SSB configured for RLM are actually transmitted within UE active DL BWP during the entire evaluation period specified in section 4.5.1.4.3.

Table 4.5.1.4.5-1 defines the cell specific primary level settings.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90 % with a confidence interval of 95 %.

Table 4.5.1.4.5-1: Cell specific test parameters for FR1 (Cell 2) for in-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1.8	-6.2	-15.8	-5.3	1.8
	Config 2, 5		1.8	-6.2	-15.8	-5.3	1.8
	Config 3, 6		1.8	-6.2	-15.8	-5.3	1.8

N_{oc}	Config 1, 4	dBm/15 KHz	-98
	Config 2, 5		-98
	Config 3, 6		-98
Propagation condition			TDL-C 300ns 100Hz

NOTE 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 4.5.1.4.4-1.
NOTE 5: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR during T3 and T4 from D.4.1.1 are -18.0-TT and -8.0-TT, which are -18.8dB and -8.8dB(including test tolerances).

4.5.1.5 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode

4.5.1.5.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS Out-of-sync radio link monitoring requirements in TS 38.133 clause 8.1.

4.5.1.5.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and CSI-RS based RLM.

4.5.1.5.3 Minimum conformance requirements

The minimum requirements are specified in clause 4.5.1.0.3. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.1.5.

4.5.1.5.4 Test description

There are two cells configured in this test, the E-UTRA PCell and NR PSCell. This test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 4.5.1.5.4-1 shows the three different time durations and the corresponding variation of the downlink SNR in the active cell to emulate out-of-sync states.

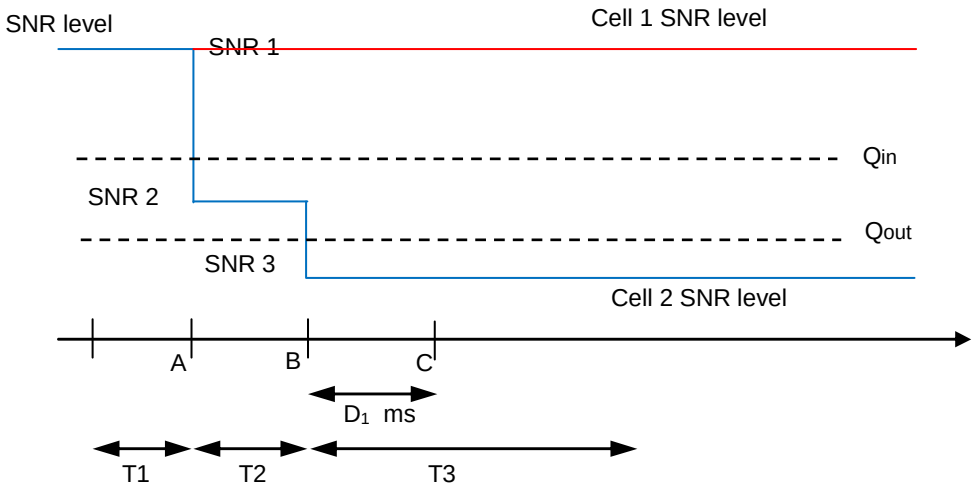

Figure 4.5.1.5.4-1: SNR variation for out-of-sync testing

4.5.1.5.4.1 Initial conditions

Test 4.5.1.5 can be run in one of the configurations defined in Table 4.5.1.5.4.1-1.

Table 4.5.1.5.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
4.5.1.5-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.5-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.5-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.1.5-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.5-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.5-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.1.5.4.1-2.

Table 4.5.1.5.4.1-2: Initial conditions for CSI-RS In-sync radio link monitoring in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. The test parameters are given in Table 4.5.1.5.4.1-3 below.
2. Message contents are defined in clause 4.5.1.5.4.3.
3. There are two cells in the test, where Cell 1 is the E-UTRAN PCell on the E-UTRA carrier, and Cell 2 is the NR PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to TS 38.133 [6] Table A.6.1.1-1 for this test. Cell 2 is configured according to clauses C.1.2 and C.1.3.

Table 4.5.1.5.4.1-3: General test parameters for FR1 PSCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMSI CORESET Reference	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD

Parameter		Unit	Value
			Test 1
Channel			
DedicatedCORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2, 5		CCR.1.3 TDD
	Config 3, 6		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2, 5		Resource #4 in TRS.1.1 TDD
	Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration	Config 1, 4		CSI-RS 1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
NOTE 1: UE-specific PDCCH is not transmitted after T1 starts. NOTE 2: E-UTRAN is in non-DRX mode under test.			

Table 4.5.1.5.4.1-4: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
NOTE: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned.	

4.5.1.5.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms).

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall transmit an *RRCConnectionReconfiguration* message configuring the UE for inter-frequency measurements.

3. The UE shall transmit *RRCReconfigurationComplete* message.

4. Set the parameters of Cell 2 according to T1 in Table 4.5.1.5.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.1.5.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.1.5.5-1. T3 starts.

7. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect any uplink power on NR carrier higher than OFF power defined in TS 38.521-1 [17] clause 6.3.2.5 from time point C (D1 after the start of T3) until T3 expires, the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. When T3 expires the SS shall change the SNR value to T1 as specified in Table 4.5.1.5.5-1.

9. If the UE has not re-established the connection in at least 1s, the SS shall ensure PSCell is released.

10. The SS then shall transmit *RRCConnectionReconfiguration* message with condition *MCG_and_SCG* according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

11. If the Reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

12. Repeat steps 4-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with the following exceptions.

Table 4.5.1.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier center of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-9 Table H.3.4-1 Table H.3.4-1a Table H.3.4-4 with condition gapUE Table H.3.4-5 with condition BFD Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM

Table 4.5.1.5.4.3-2: Void

4.5.1.5.5 Test requirement

Tables 4.5.1.5.4.1-2 and 4.5.1.5.5-1 define the primary level settings including test tolerances for Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode.

Table 4.5.1.5.5-1: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PBCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1.8	-6.2	-15.8
	Config 2, 5		1.8	-6.2	-15.8
	Config 3, 6		1.8	-6.2	-15.8
N_{oc}	Config 1, 4	dBm/15K Hz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		
Propagation condition			TDL-C 300ns 100Hz		

NOTE 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure 4.5.1.5.4-1.
NOTE 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 from D.4.1.1 is -18 -TT, which is -18.8dB (including test tolerances).

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all slots configured for CSI transmission according the configured CSI reporting mode on PUCCH.

The UE shall stop transmitting uplink signal no later than time point C (D1 after the start of time duration T3).

The uplink signal is verified on the basis of the UE output power:

- UE output power equal to or higher than Transmit minimum power (as defined in TS 38.521-1 [17] clause 6.3.1.5) means uplink signal
- UE output power equal to or less than Transmit OFF power (as defined in TS 38.521-1 [17] clause 6.3.2.5) means no uplink signal.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

4.5.1.6 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode

4.5.1.6.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS in-sync radio link monitoring requirements in TS 38.133 clause 8.1.

4.5.1.6.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and CSI-RS based RLM.

4.5.1.6.3 Minimum conformance requirements

The minimum requirements are specified in clause 4.5.1.0.4. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.1.6.

4.5.1.6.4 Test description

There are two cells configured in this test, the E-UTRA PCell and NR PSCell. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 4.5.1.6.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate in-sync states.

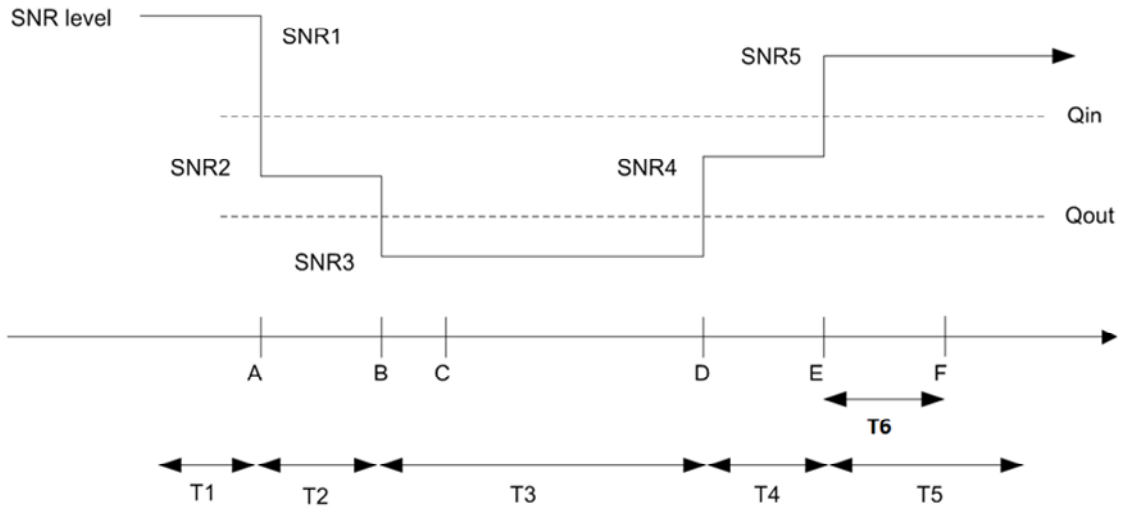

Figure 4.5.1.6.4-1: SNR variation for In-sync testing

4.5.1.6.4.1 Initial conditions

Test 4.5.1.6 can be run in one of the configurations defined in Table 4.5.1.6.4.1-1.

Table 4.5.1.6.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
4.5.1.6-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.6-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.6-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.1.6-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.6-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.6-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configue the test equipment and the DUT according to the parameters in Table 4.5.1.6.4.1-2.

Table 4.5.1.6.4.1-2: Initial conditions for CSI-RS In-sync radio link monitoring in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. The test parameters are given in Table 4.5.1.6.4.1-3 below.
2. Message contents are defined in clause 4.5.1.6.4.3.
3. There are two cells in the test, where Cell 1 is the E-UTRAN PCell on the E-UTRA carrier, and Cell 2 is the NR PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clause C.1.2 and C.1.3.

Table 4.5.1.6.4.1-3: General test parameters for FR1 PSCell for CSI-RS In-sync testing in non-DRX mode

Parameter			Unit	Value
				Test 1
Active E-UTRA PCell				Cell 1
E-UTRA RF Channel Number				1
Active PSCell				Cell 2
RF Channel Number				2
Duplex mode		Config 1, 4		FDD
		Config 2, 3, 5, 6		TDD
TDD Configuration		Config 1, 4		Not Applicable
		Config 2, 5		TDDConf.1.1
		Config 3, 6		TDDConf. 2.1
DL initial BWP configuration		Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration		Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMSI CORESET Reference Channel		Config 1, 4		CR.1.1 FDD
		Config 2, 5		CR.1.1 TDD
		Config 3, 6		CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1, 4		CCR.1.1 FDD
		Config 2, 5		CCR.1.1 TDD
		Config 3, 6		CCR.2.1 TDD
SSB Configuration		Config 1, 4		SSB.1 FR1
		Config 2, 5		SSB.1 FR1
		Config 3, 6		SSB.2 FR1
SMTC Configuration		Config 1, 2, 4, 5		SMTC.1
		Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2, 4, 5		15 KHz
		Config 3, 6		30 KHz
TRS configuration		Config 1, 4		TRS.1.1 FDD
		Config 2, 5		TRS.1.1 TDD
		Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM		Config 1, 4		Resource #4 in TRS.1.1 FDD
		Config 2, 5		Resource #4 in TRS.1.1 TDD
		Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH				TCI.State.2
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical		dB	0

Parameter		Unit	Value
			Test 1
	PDCCH RE energy to average CSI-RS RE energy		
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.44
T4		s	0.2
T5		s	0.88
T6		s	0.84
NOTE 1: UE-specific PDCCH is not transmitted after T1 starts. NOTE 2: E-UTRAN is in non-DRX mode under test.			

4.5.1.6.4.2 Test procedure and Test Mode *On*

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of Cell 2 according to T1 in Table 4.5.1.6.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.1.6.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.1.6.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 4.5.1.6.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 4.5.1.6.5-1. T5 starts.

7. If the SS detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point F (T6 after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. If the iteration fails, the SS shall first attempt to release and add the PSCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.

9. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with the following exceptions:

Table 4.5.1.6.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM

4.5.1.6.5 Test requirement

Tables 4.5.1.6.4.1-2 and 4.5.1.6.5-1 define the primary level settings including test tolerances for Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode.

Table 4.5.1.6.5-1: Cell specific test parameters for FR1 for CSI-RS In-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1.8	-6.2	-15.8	-5.3	1.8
	Config 2, 5		1.8	-6.2	-15.8	-5.3	1.8
	Config 3, 6		1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1, 4	dBm/15KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 4.5.1.6.4-1.
NOTE 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 from D.4.1.1 are -18.0-TT and -8.0-TT, which are -18.8dB and -8.8dB (including test tolerances).

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 after the start of time duration T5) the UE shall transmit uplink signal at least in all slots configured for CSI transmission according to the configured CSI reporting mode on PUCCH.

The uplink signal is verified on the basis of the UE output power:

- UE output power equal to or higher than Transmit minimum power (as defined in TS 38.521-1 [17] clause 6.3.1.5) means uplink signal

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

4.5.1.7 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode

4.5.1.7.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when DRX is used. This test will partly verify the FR1 PSCell CSI-RS Out-of-sync radio link monitoring requirements in TS 38.133 clause 8.1.

4.5.1.7.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC FR1, CSI-RS based RLM and long DRX cycle.

4.5.1.7.3 Minimum conformance requirements

The minimum requirements are specified in clause 4.5.1.0.3. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.1.7.

4.5.1.7.4 Test description

There are two cells configured in this test, the E-UTRA PCell and NR PSCell. This test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 4.5.1.7.4-1 shows the three different time durations and the corresponding variation of the downlink SNR in the active cell to emulate out-of-sync states.

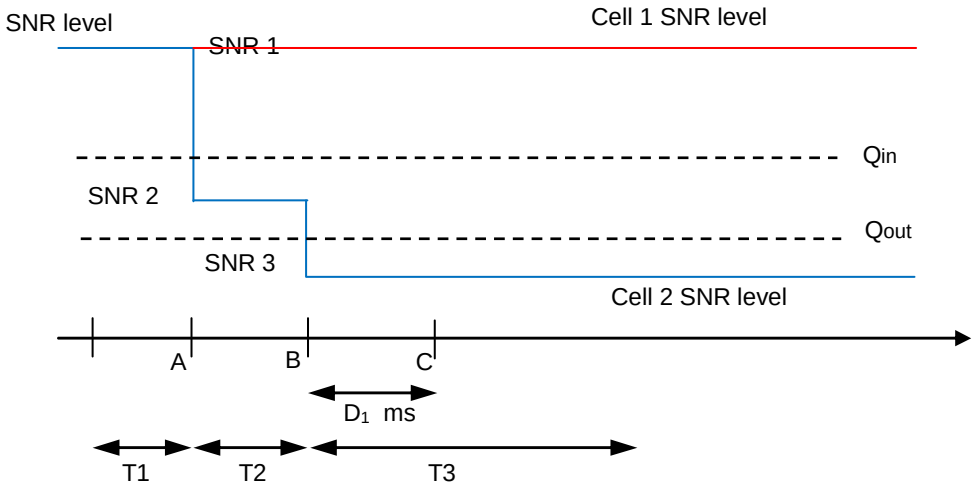

Figure 4.5.1.7.4-1: SNR variation for out-of-sync testing

4.5.1.7.4.1 Initial conditions

Test 4.5.1.7 can be run in one of the configurations defined in Table 4.5.1.7.4.1-1.

Table 4.5.1.7.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
4.5.1.7-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.7-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.7-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.1.7-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.7-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.7-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configue the test equipment and the DUT according to the parameters in Table 4.5.1.7.4.1-2.

Table 4.5.1.7.4.1-2: Initial conditions for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.1.7.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. The test parameters are given in Table 4.5.1.7.4.1-3 below.
2. Message contents are defined in clause 4.5.1.7.4.3.
3. There are two cells in the test, where Cell 1 is the E-UTRAN PCell on the E-UTRA carrier, and Cell 2 is the NR PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clauses C.1.2 and C.1.3.

Table 4.5.1.7.4.1-3: General test parameters for FR1 PSCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2, 5		CCR.1.3 TDD
	Config 3, 6		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1

Parameter		Unit	Value
			Test 1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2, 5		Resource #4 in TRS.1.1 TDD
	Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
NOTE 1: UE-specific PDCCH is not transmitted after T1 starts. NOTE 2: E-UTRAN is in non-DRX mode under test.			

4.5.1.7.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of Cell 2 according to T1 in Table 4.5.1.7.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.1.7.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.1.7.5-1. T3 starts.

5. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in the On-duration part of every DRX cycle in the slots configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect any uplink power on NR carrier higher than OFF power defined in TS 38.521-1 [17] clause 6.3.2.5 from time point C (D1 after the start of T3) until T3 expires, the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

6. When T3 expires the SS shall change the SNR value to T1 as specified in Table 4.5.1.7.5-1.

7. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with the following exceptions.

Table 4.5.1.7.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM Table H.3.7-1 with condition DRX.3

Table 4.5.1.7.4.3-2: RLF-TimersAndConstant

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
}			

4.5.1.7.5 Test requirement

Tables 4.5.1.7.4.1-2 and 4.5.1.7.5-1 define the primary level settings including test tolerances for Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode.

Table 4.5.1.7.5-1: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PBCH DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1.8	-6.2	-15.8
	Config 2, 5		1.8	-6.2	-15.8
	Config 3, 6		1.8	-6.2	-15.8
N_{oc}	Config 1, 4	dBm/15KHz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		
Propagation condition			TDL-C 300ns 100Hz		

NOTE 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 4.5.1.7.4-1.
NOTE 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 from D.4.1.1 is -18 -TT, which is -18.8dB (including test tolerances).

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least once every DRX cycle, in the On-duration part of the cycle in the slots configured for CSI transmission according the configured CSI reporting mode on PUCCH.

The UE shall stop transmitting uplink signal no later than time point C (D1 after the start of time duration T3).

The uplink signal is verified on the basis of the UE output power:

- UE output power equal to or higher than Transmit minimum power (as defined in TS 38.521-1 [17] clause 6.3.1.5) means uplink signal

- UE output power equal to or less than Transmit OFF power (as defined in TS 38.521-1 [17] clause 6.3.2.5) means no uplink signal.

The rate of correct events observed during repeated tests shall be at least 90 % with a confidence level of 95 %.

4.5.1.8 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode

4.5.1.8.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when DRX is used. This test will partly verify the FR1 PSCell CSI-RS in-sync radio link monitoring requirements in TS 38.133 clause 8.1.

4.5.1.8.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC FR1, CSI-RS based RLM and long DRX cycle.

4.5.1.8.3 Minimum conformance requirements

The minimum requirements are specified in clause 4.5.1.0.4. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.1.8.

4.5.1.8.4 Test description

There are two cells configured in this test, the E-UTRA PCell and NR PSCell. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 4.5.1.8.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate in-sync states.

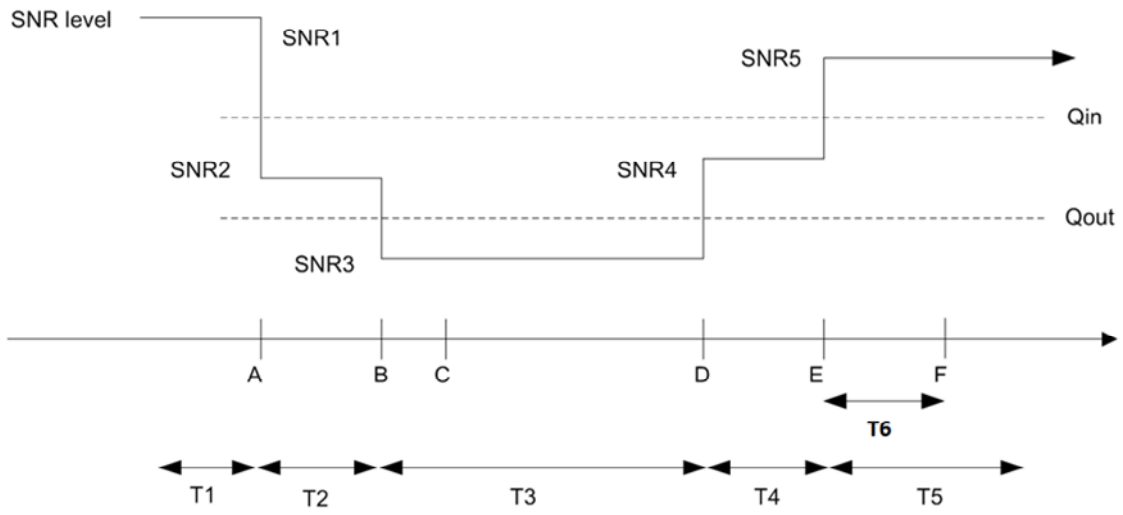

Figure 4.5.1.8.4-1: SNR variation for In-sync testing

4.5.1.8.4.1 Initial conditions

Test 4.5.1.8 can be run in one of the configurations defined in Table 4.5.1.8.4.1-1.

Table 4.5.1.8.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
4.5.1.8-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.8-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.1.8-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.1.8-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.1.8-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode

4.5.1.8-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configue the test equipment and the DUT according to the parameters in Table 4.5.1.8.4.1-2.

Table 4.5.1.8.4.1-2: Initial conditions for CSI-RS In-sync radio link monitoring in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. The test parameters are given in Table 4.5.1.8.4.1-3 below.
2. Message contents are defined in clause 4.5.1.8.4.3.
3. There are two cells in the test, where Cell 1 is the E-UTRAN PCell on the E-UTRA carrier, and Cell 2 is the NR PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clauses C.1.2 and C.1.3.

Table 4.5.1.8.4.1-3: General test parameters for FR1 PSCell for CSI-RS In-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH	Config 1, 2, 4, 5		15 KHz

Parameter		Unit	Value
			Test 1
subcarrier spacing	Config 3, 6		30 KHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2, 5		Resource #4 in TRS.1.1 TDD
	Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI for reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.24
T4		s	0.2
T5		s	1.88
T6		s	1.84
NOTE 1: UE-specific PDCCH is not transmitted after T1 starts. NOTE 2: E-UTRAN is in non-DRX mode under test.			

Table 4.5.1.8.4.1-4: Measurement gap configuration for FR1 CSI-RS In-sync radio link monitoring in DRX mode

Field	Test 1
	Value
gapOffset	0
NOTE: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned.	

4.5.1.8.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms).

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. The SS shall transmit an *RRCConnectionReconfiguration* message configuring the UE for inter-frequency measurements.
3. The UE shall transmit *RRCReconfigurationComplete* message.
4. Set the parameters of Cell 2 according to T1 in Table 4.5.1.8.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.1.8.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.1.8.5-1. T3 starts.
7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 4.5.1.8.5-1. T4 starts.
8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 4.5.1.8.5-1. T5 starts.
9. If the SS detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in the On-duration part of every DRX cycle in the configured slots for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point F (T6 after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.
10. If the iteration fails, the SS shall first attempt to release and add the PSCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.
11. Repeat steps 4-10 for both subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.1.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with the following exceptions:

Table 4.5.1.8.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier center of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.4-1 Table H.3.4-1a Table H.3.4-4 with condition gapUE Table H.3.4-5 with condition BFD Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM Table H.3.7-1 with condition DRX.3 and Gap

Table 4.5.1.8.4.3-2: Void

Table 4.5.1.8.4.3-3: RLF-TimersAndConstant

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms2000		
}			

4.5.1.8.5 Test requirement

Tables 4.5.1.8.4.1-2 and 4.5.1.8.5-1 define the primary level settings including test tolerances for Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode.

Table 4.5.1.8.5-1: Cell specific test parameters for FR1 for CSI-RS In-sync radio link monitoring in DRX mode

Parameter		**Unit**	**Test 1**				
			T1	**T2**	**T3**	**T4**	**T5**
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1.8	-6.2	-15.8	-5.3	1.8
	Config 2, 5		1.8	-6.2	-15.8	-5.3	1.8
	Config 3, 6		1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1, 4	dBm/15KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
NOTE 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
NOTE 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.						
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.						
NOTE 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 4.5.1.8.4-1.						
NOTE 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 from D.4.1.1 are -18.0-TT and -8.0-TT, which are -18.8dB and -8.8dB(including test tolerances).						

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 after the start of time duration T5) the UE shall transmit uplink signal at least once every DRX cycle, in the ON-duration part of the cycle in the slots configured for CSI transmission according to the configured CSI reporting mode on PUCCH.

The uplink signal is verified on the basis of the UE output power:

- UE output power equal to or higher than Transmit minimum power (as defined in TS 38.521-1 [17] clause 6.3.1.5) means uplink signal

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

4.5.1.9 EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

4.5.1.9.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements specified in clause 4.5.1.0.5.1 for UE fulfilling good serving cell quality criterion and low mobility criterion, if configured.

4.5.1.9.2 Test applicability

This test applies to all types of E-UTRA UE release 17 and forward, supporting EN-DC and RLM relaxation criteria *rlm-Relaxation-r17*.

4.5.1.9.3 Minimum conformance requirement

The requirements for UE supporting relaxed measurement criterion are specified in clause 4.5.1.0.5. The minimum requirements for SSB-based RLM with this criterion are specified in clause 4.5.1.0.5.1. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.1.9.

4.5.1.9.4 Test description

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table 4.5.1.9.4.1-1. The test parameters are given in Tables 4.5.1.9.4.1-3 and 4.5.1.9.5-1.

There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.6.1.1-1. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 4.5.1.9.4-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states.

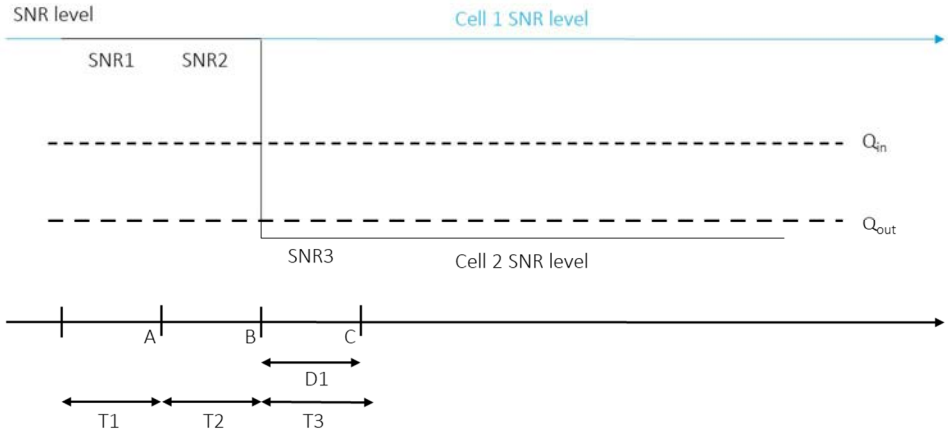

Figure 4.5.1.9.4-1: SNR variation for EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

4.5.1.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.1.9.4.1-1.

Table 4.5.1.9.4.1-1: Supported test configurations for EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Test Case ID	Description
4.5.1.9-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.1.9-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.1.9-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4.5.1.9-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.1.9-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.1.9-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 4.5.1.9.4.1-2.

Table 4.5.1.9.4.1-2: Initial conditions for EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.1.9.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use TS 38.508-1 [14] A.3.2.5.2 for DUT part and TS 38.508-1 [14] A.3.1.7.4 for TE Part		

1. Message contents are defined in clause 4.5.1.9.4.3.

2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2.

3. The test parameters are given in Table 4.5.1.9.4.1-3 below.

4. Downlink signals for NR cell are initially set up according to clauses C.1.2 and C.1.3.

Table 4.5.1.9.4.1-3: General test parameters for EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
BWchannel	Config 1, 4	MHz	10: NRB,c = 52
	Config 2, 5		10: NRB,c = 52
	Config 3, 6		40: NRB,c = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 kHz
	Config 3, 6		30 kHz
PRACH Configuration	Config 1, 2, 4, 5		Table A.7.1-1
	Config 3, 6		Table A.7.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4

	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	5.2
T2		s	0.68
T3		s	2.48
D1		s	2.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

4.5.1.9.4.2 Test Procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i .e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) configuring the UE with *goodServingCellEvaluationRLM* and measurements as specified in section 4.5.1.9.4.3.

3. The UE shall transmit *RRCReconfigurationComplete* message (embedded in *RRCConnectionReconfiguration* message).

4. Set the parameters according to T1 in Table 4.5.1.9.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.1.9.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.1.9.5-1. T3 starts.

7. If the SS:

   a) detects uplink power equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in the on-duration part of every DRX cycle in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point B; and

   b) does not detect any uplink power higher than OFF power defined in TS 38.521-1 [17] clause 6.3.2.5 in any of such CSI transmission occasions, from time point C (D1 after the start of T3) until T3 expires,

   the number of successful tests is increased by one. Otherwise, the number of failed tests is increased by one.

8. When T3 expires the SS shall change the SNR value to T1 as specified in Table 4.5.1.9.5-1.

9. If the UE has not re-established the connection in at least 1s, go to step 10. Otherwise go to step 11.

10. The SS shall ensure the PSCell is released. Then it shall transmit an *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If the reconfiguration fails go to step 11, otherwise go to step 12.

11. Switch off and on the UE and go to step 12.

12. Repeat steps 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.1.9.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and 7.3.1 with the following exceptions.

Table 4.5.1.9.4.3-1: Common Exception messages for EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition L3 FILTERING NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-4 with A3-offset = 0 Table H.3.4-1 Table H.3.4-1a Table H.3.4-3 Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table H.3.7-1 with Condition DRX.3

Table 4.5.1.9.4.3-2: *RLF-TimersAndConstant* for EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

Table 4.5.1.9.4.3-3: *CellGroupConfig* for EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
goodServingCellEvaluationRLM-r17 SEQUENCE {			
offset-r17	Not present	If this field is absent, the UE applies the (default) value of 0 dB	
}			
}			
}			

4.5.1.9.5 Test Requirement

Table 4.5.1.9.5-1 defines the cell specific primary level settings including test tolerances for EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion.

Table 4.5.1.9.5-1: Cell specific test parameters for EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1.8	1.8	-15.8
	Config 2, 5		1.8	1.8	-15.8
	Config 3, 6		1.8	1.8	-15.8
N_{oc}	Config 1, 4	dBm/15k Hz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		
N_{oc}	Config 1, 4	dBm/SCS	-98		
	Config 2, 5		-98		
	Config 3, 6		-95		
goodServingCellEvaluationRLM			configured		
offset in goodServingCellEvaluationRLM		dB	Not configured		
goodServingCellEvaluationRLM		dB	0		
s-SearchDeltaP-Connected		dB	3		
t-SearchDeltaP-Connected		s	5		
Propagation condition			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure 4.5.1.9.4-1.
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95 %.

4.5.2 Interruption

4.5.2.0 Minimum conformance requirements

4.5.2.0.1 Minimum conformance requirements for interruptions at transitions between active and non-active during DRX.

[TS 38.133, clause 8.2.1.2.1]

Interruption on PSCell and the activated SCell if configured due to E-UTRA PCell transitions between active and non-active during DRX when PSCell or SCell is in non-DRX are allowed with up to 1% probability of missed ACK/NACK when the configured E-UTRA PCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured E-UTRA PCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 4.5.2.0.1-1.

Each interruption shall not exceed X slot as defined in table 4.5.2.0.1-1.

Table 4.5.2.0.1-1: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	
3	0.125	5	

When both E-UTRA PCell and PSCell are in DRX, no interruption is allowed.

The normative reference for this requirement is TS 38.133 [6] clause 8.2.1.2.1.

4.5.2.0.2 Minimum conformance requirements for interruptions during measurements on deactivated NR SCC

[TS 38.133, clause 8.2.1.2.5.1]

Interruption on PSCell and other active NR SCell(s) during measurement on the deactivated NR SCC shall meet requirements in clause 8.2.2.2.3, where the term PCell in clause 8.2.2.2.3 shall be deemed to be replaced with PSCell.

[TS 38.133, clause 8.2.2.2.3]

Interruptions on PCell due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 4.5.2.0.2-1 if the PCell is not in the same band as the deactivated SCell. Each interruption shall not exceed requirement in Table 4.5.2.0.2-2 if the PCell is in the same band as the deactivated SCell.

Interruptions on active SCell due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 4.5.2.0.2-1 if the active SCell is not in the same band as the deactivated SCell. Each interruption shall not exceed requirement in Table 4.5.2.0.2-2 if the active SCell is in the same band as the deactivated SCell.

[TS 38.133, clause 8.2.2.2.2]

Table 4.5.2.0.2-1: Interruption duration for SCell activation/deactivation for inter-band CA

μ	NR Slot length (ms)	Interruption length
0	1	1
1	0.5	1
2	0.25	2
3	0.125	4

Table 4.5.2.0.2-2: Interruption duration for SCell activation/deactivation for intra-band CA

μ	NR Slot length (ms)	Interruption length
0	1	1 + $T_{SMTC_duration}$
1	0.5	1 + $T_{SMTC_duration}$
2	0.25	2 + $T_{SMTC_duration}$
3	0.125	4 + $T_{SMTC_duration}$
NOTE: $T_{SMTC_duration}$ is - the longest SMTC duration among all above activated serving cells and the SCell being activated when one SCell is activated; - the longest SMTC duration among all activated serving cells in the same band when one SCell is deactivated.		

The normative reference for this requirement is TS 38.133 [6] clause 8.2.1.2.5.1.

4.5.2.0.3 Minimum conformance requirements for interruptions during measurements on deactivated E-UTRAN SCC

[TS 38.133 clause 8.2.1.2.5.2]

When one E-UTRA SCell in MCG is deactivated, the UE is allowed due to measurements on the E-UTRA SCC with the deactivated E-UTRA SCell:

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK when any of the configured *measCycleSCell* [2] for the deactivated E-UTRA SCells is 640 ms or longer.

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK regardless of the configured *measCycleSCell* [2] for the deactivated E-UTRA SCells if indicated by the network using IE *allowInterruptions* [2].

Each interruption shall not exceed:

- X3 slot, if the PSCell or activated SCell is not in the same band as the E-UTRA deactivated SCC being measured, or

- Y3 slot + SMTC duration, if the PSCell or activated SCell is in the same band as the E-UTRA deactivated SCC being measured, provided the cell specific reference signals from the PSCell or activated SCell and the E-UTRA deactivated SCC being measured are available in the same slot.

Table 4.5.2.0.3-1: Interruption length X3 and Y3 at measurements on deactivated E-UTRA SCC

μ	NR Slot length (ms)	Interruption length X3 slot	Interruption length Y3 slot
0	1	1	1
1	0.5	1	1
2	0.25	2	2
3	0.125	4	4

The normative reference for this requirement is TS 38.133 [6] clause 8.2.1.2.5.1.

4.5.2.0.4 Minimum conformance requirements for interruptions at NR SRS carrier based switching

[TS 38.133 clause 8.2.1.2.12]

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to an active UL BWP of another activated carrier;
- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;
- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex and srs-SwitchFromCarrier in TS38.331 [2];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [26].
- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD in SCG.
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [2], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101 [5], the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 4.5.2.0.4-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 4.5.2.0.4-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 4.5.2.0.4-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 4.5.2.0.4-2.

Table 4.5.2.0.4-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us)[Note 1]	Interruption length X1 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	3	3
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

Table 4.5.2.0.4-2: Interruption length X2 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) Note1	Interruption length X2 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			60	120
0	1	≤ 200	2	2
1	0.5	≤ 200	2	2
2	0.25	≤ 200	3	3
3	0.125	≤ 200	4	4
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

For intra-band SRS carrier switching in FR1 or FR2, interruptions in Table 4.5.2.0.4-1 and in Table 4.5.2.0.4-2 based on SRS carrier switching time $\leq$ 200us shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 4.5.2.0.4-1 and in Table 4.5.2.0.4-2 shall apply.

The normative reference for this requirement is TS 38.133 [6] clause 8.2.1.2.12.

4.5.2.0.5 Minimum conformance requirements for interruptions at E-UTRA SRS carrier based switching

[TS 38.133 clause 8.2.1.2.13]

A PUSCH-less carrier of E-UTRA SCell is a TDD carrier without PUCCH/PUSCH configured. When a UE needs to transmit periodic or aperiodic SRS [23] and/or non-contention based PRACH on a PUSCH-less carrier of E-UTRA SCell, the UE can perform carrier based switching to one or more PUSCH-less carrier of E-UTRA SCells from a E-UTRA carrier with PUSCH or from another PUSCH-less E-UTRA carrier of SCell prior to transmitting SRS and/or PRACH, provided that:

- switching is from a configured E-UTRA carrier to another activated TDD E-UTRA carrier;
- the PUSCH-less carrier of E-UTRA SCells to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission or configured via RRC [15] for periodic SRS transmission;
- the E-UTRA serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex [15];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS36.213 [26];
- the SRS switching is not colliding with PDCCH in subframe 0 and 5 as specified in TS36.213 [26];
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 36.331 [2], and is compliant to the requirements for inter-band CA with uplink in one E-UTRA band and without simultaneous Rx/Tx specified in TS 36.101 [25], the SRS or RACH transmission are not simultaneously scheduled with DL subframe #0 or DL subframe #5 on other E-UTRA carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching to the PUSCH-less carrier of a serving cell,

- with up to X3 slot as specified in Table 4.5.2.0.5-1.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching from the PUSCH-less carrier of a serving cell,

- with up to X3 slot as specified in Table 4.5.2.0.5-1

Table 4.5.2.0.5-1: Interruption length X3 (slot)

μ	NR Slot length (ms)	Interruption length X3 (slots)
0	1	2
1	0.5	3
2	0.25	5
3	0.125	9

The normative reference for this requirement is TS 38.133 [6] clause 8.2.1.2.13.

4.5.2.0.6 Minimum conformance requirements for interruptions due to RRM and RLM/BFD measurements on deactivated NR SCG

[TS 36.133, clause 7.32.2.20]

If the UE is not configured with RLM or BFD on the deactivated NR PSCell, interruptions on E-UTRA PCell or activated E-UTRA SCell(s) due to measurements on the deactivated NR PSCell are allowed with up to 0.5% probability of missed ACK/NACK feedback when the configured *measCyclePSCell* is 640ms or longer.

- For inter-band EN-DC, the UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed 1 subframe for synchronous inter-band EN-DC or 2 subframes for asynchronous inter-band EN-DC.
- For synchronous intra-band EN-DC, the UE is only allowed to cause an interruption no earlier than 1 subframe before an SMTC and no later than 1 subframe after the SMTC. The interruption shall not exceed the duration of the SMTC of the deactivated NR PSCell + 2 subframes. The interruption is based on assumption that the cell specific reference signals from both cells are available in the same slot.

If the UE is configured with RLM or BFD on the deactivated NR PSCell, interruptions on E-UTRA PCell or activated E-UTRA SCell(s) due to measurements on the deactivated NR PSCell are allowed with up to 1.0% probability of missed ACK/NACK feedback.

The normative reference for this requirement is TS 36.133 [23] clause 7.32.2.20.

4.5.2.1 EN-DC FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

4.5.2.1.1 Test purpose

The purpose of this test is to verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC.

4.5.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC FR1 and long DRX cycle.

4.5.2.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.2.1.

4.5.2.1.4 Test description

4.5.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.2.1.4.1-1.

Table 4.5.2.1.4.1-1: Supported test configurations

Configuration	Description
4.5.2.1-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.1-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.1-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.2.1-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.1-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.1-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.2.1.4.1-2.

Table 4.5.2.1.4.1-2: Initial conditions for EN-DC FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.5.2.1.4.1-3.
2. Message contents are defined in clause 4.5.2.1.4.3.
3. There are one E-UTRAN carrier and one NR carrier and two cells in the test. Cell 1 is PCell on the E-UTRAN carrier, Cell 2 is PSCell on the NR carrier, Cell 1 is the cell used for connection setup with the power levels set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clauses C.1.1 and C.1.2.

Table 4.5.2.1.4.1-3: General test parameters for E-UTRAN - NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell 2
DRX		DRX.4	DRX related parameters are defined in TS 38.133 Table A.3.3.4-1
Measurement gap pattern Id		OFF	
T1	s	10	

4.5.2.1.4.2 Test procedure

The test consists of two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell1 and Cell2. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On according* to TS 38.508-1 [14] clause 4.5.

2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall transmit an RRCConnectionReconfiguration message to configure PCell (Cell1) and PSCell (Cell2) on the MCG and SCG as per TS 36.508 [7] clause 4.6 with the message content exceptions defined in clause 4.5.2.1.4.3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

5. The SS would ensure continuous transmission on PSCell, while not scheduling on PCell at least for 200 ms to ensure inactivity timer is expired on the UE for LTE PCell.

6. Set the parameters according to T1 in Table 4.5.2.1.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

7. SS schedules on PSCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PSCell.

8. If more than 99% of uplink transmissions are received by SS then count a success for the event "ACK/NACK". Otherwise count a fail for the event "ACK/NACK".

9. If no two consecutive DTX is observed by the SS, then count a success for the event "DTX". Otherwise count a fail for the event "DTX".

10. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

11. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

12. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

13. Repeat step 3-10 until a test verdict has been achieved

Each of the events "ACK/NACK" and "DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

4.5.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 4.5.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-2 with Condition DRX.4

4.5.2.1.5 Test requirement

Table 4.5.2.1.5-1 defines the NR cell specific primary level settings including test tolerances for E-UTRAN - NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC test.

Table 4.5.2.1.5-1: NR Cell specific test parameters for E-UTRAN - NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Unit	Cell 2

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86
Time offset to cell1 Note 4		µs	3 for intra-band EN-DC, 33 for inter-band EN-DC
Propagation Condition			AWGN

Parameter	Unit	Cell 2
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
NOTE 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells.		

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed X slots as defined in Table 4.5.2.1.5-2.

Table 4.5.2.1.5-2: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X
0	1	1
1	0.5	1

The rate of correct events observed during repeated tests shall be at least 90%.

4.5.2.2 EN-DC FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

4.5.2.2.1 Test purpose

The purpose of this test is to verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC.

4.5.2.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC FR1 and long DRX cycle.

4.5.2.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.2.2.

4.5.2.2.4 Test description

4.5.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.2.2.4.1-1.

Table 4.5.2.2.4.1-1: Supported test configurations

Configuration	Description
4.5.2.2-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.2-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.2-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.2.2-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.2-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.2-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.2.2.4.1-2.

Table 4.5.2.2.4.1-2: Initial conditions for EN-DC FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.5.2.2.4.1-3.
2. Message contents are defined in clause 4.5.2.2.4.3.
3. There are one E-UTRAN carrier and one NR carrier and two cells in the test. Cell 1 is PCell on the E-UTRAN carrier, Cell 2 is PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power levels set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clauses C.1.1 and C.1.2.

Table 4.5.2.2.4.1-3: General test parameters for E-UTRAN - NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell 2
DRX		DRX.4	DRX related parameters are defined in TS 38.133 table A.3.3.4-1
Measurement gap pattern Id		OFF	
T1	s	10	

4.5.2.2.4.2 Test procedure

The test consists of two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell1 and Cell2. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels.
3. The SS shall transmit an RRCConnectionReconfiguration message to configure PCell (Cell1) and PSCell (Cell2) on the MCG and SCG as per TS 36.508 [7] clause 4.6 with the message content exceptions defined in clause 4.5.2.2.4.3.
4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.
5. The SS would ensure continuous transmission on PSCell, while not scheduling on PCell at least for 200 ms to ensure inactivity timer is expired on the UE for LTE PCell.

6. Set the parameters according to T1 in Table 4.5.2.2.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

7. SS schedules on PSCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitorACK/NACK/DTX on PSCell.

8. If more than 99% of uplink transmissions are received by SS then count a success for the event "ACK/NACK". Otherwise count a fail for the event "ACK/NACK".

9. If no longer than X consecutive DTX is observed by the SS, then count a success for the event "DTX". Otherwise count a fail for the event "DTX". Where

   - For test configuration 4.5.2.2-1 and 4.5.2.2-4:

     - X = interruption length+k1 if k1 $\leq$ interruption length, otherwise X = interruption length.

   - For test configuration other than 4.5.2.2-1 and 4.5.2.2-4:

     - X = interruption length.

   - Interruption length is given in Table 4.5.2.2.5-2.

10. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

11. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

12. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

13. Repeat step 3-10 until a test verdict has been achieved

Each of the events "ACK/NACK" and "DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

4.5.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 4.5.2.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-2 with Condition DRX.4

4.5.2.2.5 Test requirement

Table 4.5.2.2.5-1 define the NR cell specific primary level settings including test tolerances for E-UTRAN - NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC test.

Table 4.5.2.2.5-1: NR Cell specific test parameters for E-UTRAN - NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable

Parameter		Unit	Cell 2
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
N_{oc} Note 2	Config 1,2,4,5	-104	-104
	Config 3,6		-101
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86
Time offset to Cell1 Note 4	Config 1,2,4,5	µs	500
	Config 3,6		250
Propagation Condition			AWGN

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells.

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed X slots as defined in Table 4.5.2.2.5-2.

Table 4.5.2.2.5-2: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X
0	1	2
1	0.5	2

The rate of correct events observed during repeated tests shall be at least 90%.

4.5.2.3 EN-DC FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Editor's Note: TT analysis for test configuration with SpCC SCS = 15kHz + SCC SCS = 30kHz or SpCC SCS = 30kHz + SCC SCS = 15kHz are still missing.

4.5.2.3.1 Test purpose

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC.

4.5.2.3.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and 2 DL CA in NR.

4.5.2.3.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.2.3.

4.5.2.3.4 Test description

4.5.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. Supported test configurations for LTE PCell and NR PSCell are shown in Table 4.5.2.3.4.1-1. Supported test configurations for NR SCell are shown in Table 4.5.2.3.4.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

Table 4.5.2.3.4.1-1: Supported test configurations for LTE PCell and NR PSCell

Config	Description
4.5.2.3-1	LTE FDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode
4.5.2.3-2	LTE FDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode
4.5.2.3-3	LTE FDD, NR 30 kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode
4.5.2.3-4	LTE TDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode
4.5.2.3-5	LTE TDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode
4.5.2.3-6	LTE TDD, NR 30 kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table 4.5.2.3.4.1-1A: Supported test configurations for NR SCell

$Config_{SCell}$	Description
4.5.2.3-1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
4.5.2.3-2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
4.5.2.3-3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Configure the test equipment and the DUT according to the parameters in Table 4.5.2.3.4.1-2.

Table 4.5.2.3.4.1-2: Initial conditions for EN-DC FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.5.2.3.4.1-3.
2. Message contents are defined in clause 4.5.2.3.4.3.
3. There are one E-UTRAN carrier and two NR carriers and three cells specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on one NR carrier and Cell 3 is the NR SCell on the other NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 and Cell 3 shall be configured according to clauses C.1.1 and C.1.2.

Table 4.5.2.3.4.1-3: General test parameters for E-UTRAN - NR interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell 2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

4.5.2.3.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN PCell, Cell2 is NR PSCell and Cell3 is deactivated NR SCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. Cell1 shall be configured as E-UTRAN PCell, Cell2 shall be configured as NR PSCell and Cell3 shall be configured as NR deactivated SCell.. During T1 the UE shall be continuously scheduled on E-UTRAN PCell and NR PSCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 4.5.2.3.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

4. Set the parameters according to T1 in Table 4.5.2.3.5-1 and Table 4.5.2.3.5-1A. Propagation conditions are set according to clause C.2.1. T1 starts.

5. SS schedules on PCell and PSCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor DTX on PCell and ACK/NACK/DTX on PSCell.

6. If more than 99.5% of uplink transmissions on PSCell are received by SS then count a success for the event "ACK/NACK". Otherwise count a fail for the event "ACK/NACK".

6a. If no longer than X consecutive DTX on PCell is observed by the SS, then count a success for the event “PCell DTX”. Otherwise count a fail for the event “PCell DTX”. Where,

- X = 1 for inter-band EN-DC, and X = 3 for intra-band EN-DC.

6b. If no longer than X consecutive DTX on PSCell is observed by the SS, then count a success for the event "PSCell DTX". Otherwise count a fail for the event "PSCell DTX". Where,

- For test configuration 4.5.2.3-1 and 4.5.2.3-4,

  - X = interruption length+k1 if k1 ≤ interruption length, otherwise X = interruption length.

Note: UE expects that the SS won't use k1 = 3 for test configuration 4.5.2.3-1 and 4.5.2.3-4.

- For test configuration other than 4.5.2.3-1 and 4.5.2.3-4,

  - X = interruption length.

- interruption length is given in Table 4.5.2.3.5-2 for inter-band case and in Table 4.5.2.3.5-3 for intra-band case.

7. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

8. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

9. Repeat step 2-8 until a test verdict has been achieved.

Each of the events "ACK/NACK", "PCell DTX" and "PSCell DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

4.5.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.2.3.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-2 with Condition Deactivated SCell; Table H.3.1-4 with A3-offset = 15
Specific message contents exceptions for Test Configuration 4.5.2.3-1, 4.5.2.3-2, 4.5.2.3-4 and 4.5.2.3-5	Table H.3.1-3 with Condition Deactivated SCell and SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.5.2.3-3 and 4.5.2.3-6	Table H.3.1-3 with Condition Deactivated SCell and SSB.2 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.5.2.3.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell(n)	n is number of SCC to be added	
measConfig	MeasConfig-DEFAULT	Measurements configuration	
}			
}			
}			

Table 4.5.2.3.4.3-3: ServingCellConfig (Cell 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
servingCellMO	2	MeasObjectId for SCell in Table H.3.1-2	
}			

4.5.2.3.5 Test requirement

Table 4.5.2.3.5-1 and Table 4.5.2.3.5-1A defines the primary level settings including test tolerances for E-UTRAN - NR FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC test configurations for NR PSCell and SCell.

Table 4.5.2.3.5-1: NR cell specific test parameters for NR PSCell for E-UTRAN - NR interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$			Note 8
$BW_{occupied}$	Config 1,2,4,5	RB	52 Note 6
	Config 3,6		106 Note 7
Initial DL BWP Configuration			DLBWP.0.1
Dedicated DL BWP Configuration			DLBWP.1.1
Initial UL BWP Configuration			ULBWP.0.1
Dedicated UL BWP Configuration			ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR 2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD

Parameter		Unit	Cell 2
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR 2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 Note 6
	Config 3,6		OP.1 Note 7
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	3 for intra-band EN-DC, 33 for inter-band EN-DC
Time offset to Cell2 Note 5		µs	-
Propagation Condition			AWGN

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells.
NOTE 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 8: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table 4.5.2.3.5-1A: NR cell specific test parameters for NR SCell for E-UTRAN - NR interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$			Note 8
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 6

Parameter		Unit	Cell 3
	$Config_{SCell}$ 3		106 Note 7
Initial DL BWP Configuration			DLBWP.0.1
Dedicated DL BWP Configuration			DLBWP.1.1
Initial UL BWP Configuration			ULBWP.0.1
Dedicated UL BWP Configuration			ULBWP.1.1
PDSCH Reference measurement channel			N/A
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR 2.1 TDD
PDCCH CORESET parameters	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
TRS configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 6
	$Config_{SCell}$ 3		OP.1 Note 7
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell}$ 1,2	dBm/9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	3 + Time offset to Cell2 for intra-band EN-DC, 33 + Time offset to Cell2 for inter-band EN-DC
Time offset to Cell2 Note 5		µs	3
Propagation Condition			AWGN

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells.
NOTE 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 8: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PSCell immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table 4.5.2.3.5-2.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PSCell no earlier than 1 slot before an SMTC and no later than 1 slot after the SMTC. the interruption on NR PSCell shall not exceed the value defined in Table 4.5.2.3.5-3.

Table 4.5.2.3.5-2: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
0	1	1
1	0.5	1

Table 4.5.2.3.5-3: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
0	1	2+SMTC duration
1	0.5	2+SMTC duration

For synchronous inter-band EN-DC, the UE is only allowed to cause interruptions on E-UTRA PCell immediately before and immediately after an SMTC. Each interruption on E-UTRA PCell shall not exceed 1 subframe.

For synchronous intra-band EN-DC, the UE is only allowed to cause an interruption on E-UTRA PCell no earlier than 1 subframe before an SMTC and no later than 1 subframe after the SMTC. The interruption on E-UTRA PCell shall not exceed SMTC duration + 2 subframes.

The rate of correct events observed during repeated tests shall be at least 90 %.

4.5.2.4 EN-DC FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Editor's Note: TT analysis for test configuration with SpCC SCS = 15kHz + SCC SCS = 30kHz or SpCC SCS = 30kHz + SCC SCS = 15kHz are still missing.

4.5.2.4.1 Test purpose

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC

4.5.2.4.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and 2 DL CA in NR.

4.5.2.4.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.2.4.

4.5.2.4.4 Test description

4.5.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. Supported test configurations for LTE PCell and NR PSCell are shown in Table 4.5.2.4.4.1-1. Supported test configurations for NR SCell are shown in Table 4.5.2.4.4.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

Table 4.5.2.4.4.1-1: Supported test configurations for LTE PCell and NR PSCell

Configuration	Description
4.5.2.4-1	LTE FDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode
4.5.2.4-2	LTE FDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode
4.5.2.4-3	LTE FDD, NR 30 kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode
4.5.2.4-4	LTE TDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode
4.5.2.4-5	LTE TDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode
4.5.2.4-6	LTE TDD, NR 30 kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table 4.5.2.4.4.1-1A: Supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Configure the test equipment and the DUT according to the parameters in Table 4.5.2.4.4.1-2.

Table 4.5.2.4.4.1-2: Initial conditions for EN-DC FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.5.2.4.4.1-3.
2. Message contents are defined in clause 4.5.2.4.4.3.
3. There are one E-UTRAN carrier and two NR carriers and three cells specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on one NR carrier and Cell 3 is the SCell on the other NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 and Cell 3 shall be configured according to clauses C.1.1 and C.1.2.

Table 4.5.2.4.4.1-3: General test parameters for E-UTRAN - NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channel

Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell 2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

4.5.2.4.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN PCell, Cell2 is NR PSCell and Cell3 is deactivated NR SCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. Cell1 shall be configured as E-UTRAN PCell, Cell2 shall be configured as NR PSCell and Cell3 shall be configured as NR deactivated SCell.. During T1 the UE shall be continuously scheduled on E-UTRAN PCell and NR PSCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 4.5.2.4.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

4. Set the parameters according to T1 in Table 4.5.2.4.5-1 and Table 4.5.2.4.5-1A. Propagation conditions are set according to clause C.2.1. T1 starts.

5. SS schedules on PCell and PSCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor DTX on PCell and ACK/NACK/DTX on PSCell.

6. If more than 99.5% of uplink transmissions are received by SS then count a success for the event "ACK/NACK". Otherwise count a fail for the event "ACK/NACK".

6a. If no longer than X consecutive DTX on PCell is observed by the SS, then count a success for the event “PCell DTX”. Otherwise count a fail for the event “PCell DTX”. Where,

- For test configuration 4.5.2.4-1, 4.5.2.4-2 and 4.5.2.4-3, X = 3;

- For test configuration 4.5.2.4-4, 4.5.2.4-5 and 4.5.2.4-6, X = 2;

7. If no longer than X consecutive DTX on PSCell is observed by the SS, then count a success for the event "PSCell DTX". Otherwise count a fail for the event "PSCell DTX". Where,

- For test configuration 4.5.2.4-1 and 4.5.2.4-4,

  - X = interruption length+k1 if k1 ≤ interruption length, otherwise X = interruption length

Note: UE expects that the SS won't use k1 = 3 for test configuration 4.5.2.4-1 and 4.5.2.4-4.

- For test configuration other than 4.5.2.4-1 and 4.5.2.4-4,

  - X = interruption length.

- Interruption length is given in Table 4.5.2.4.5-2 for inter-band case and in Table 4.5.2.4.5-3 for intra-band case.

8. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

9. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

10. Repeat step 2-9 until a test verdict has been achieved.

Each of the events "ACK/NACK" "PCell DTX" and "PSCell DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

4.5.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions.

Table 4.5.2.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-2 with Condition Deactivated SCell; Table H.3.1-4 with A3-offset = 15
Specific message contents exceptions for Test Configuration 4.5.2.4-1, 4.5.2.4-2, 4.5.2.4 -4 and 4.5.2.4-5	Table H.3.1-3 with Condition Deactivated SCell and SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.5.2.4-3 and 4.5.2.4-6	Table H.3.1-3 with Condition Deactivated SCell and SSB.2 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.5.2.4.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell(n)	n is number of SCC to be added	
measConfig	MeasConfig-DEFAULT	Measurements configuration	
}			
}			
}			

Table 4.5.2.4.4.3-3: ServingCellConfig (Cell 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
servingCellMO	2	MeasObjectId for SCell in Table H.3.1-2	
}			

4.5.2.4.5 Test requirement

Table 4.5.2.4.5-1 and Table 4.5.2.4.5-1A defines the primary level settings including test tolerances for E-UTRAN - NR FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC test configurations for NR PSCell and NR SCell.

Table 4.5.2.4.5-1: NR cell specific test parameters for NR PSCell for E-UTRAN - NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$			Note 8
$BW_{occupied}$	Config 1,2,4,5	RB	52 Note 6
	Config 3,6		106 Note 7
Initial DL BWP Configuration			DLBWP.0.1
Dedicated DL BWP Configuration			DLBWP.1.1
Initial UL BWP Configuration			ULBWP.0.1
Dedicated UL BWP Configuration			ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR 2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR 2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 Note 6
	Config 3,6		OP.1 Note 7
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4	Config 1,2,4,5	µs	500
	Config 3,6		250
Time offset to Cell2 Note 5		µs	N/A
Propagation Condition			AWGN

Parameter	Unit	Cell 2
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.		
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
NOTE 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells.		
NOTE 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.		
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.		
Note 7: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.		
Note 8: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.		

Table 4.5.2.4.5-1: NR cell specific test parameters for NR SCell for E-UTRAN - NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$			Note 8
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 6
	$Config_{SCell}$ 3		106 Note 7
Initial DL BWP Configuration			DLBWP.0.1
Dedicated DL BWP Configuration			DLBWP.1.1
Initial UL BWP Configuration			ULBWP.0.1
Dedicated UL BWP Configuration			ULBWP.1.1
PDSCH Reference measurement channel			N/A
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR 2.1 TDD
PDCCH CORESET parameters	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
TRS configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 6
	$Config_{SCell}$ 3		OP.1 Note 7
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17

Parameter		Unit	Cell 3
$\hat{E}_s/N_{oc}$		dB	17
Io^{Note3}	$Config_{SCell}$ 1,2	dBm/9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4	$Config_{SCell}$ 1,2	µs	500 + Time offset to Cell2
	$Config_{SCell}$ 3		250 + Time offset to Cell2
Time offset to Cell2 Note 5		µs	3
Propagation Condition			AWGN
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.			
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
NOTE 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells.			
NOTE 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.			
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.			
Note 7: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.			
Note 8: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.			

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PSCell immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table 4.5.2.4.5-2.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PSCell no earlier than 1 slot before an SMTC and no later than 1 slot after the SMTC. the interruption on NR PSCell shall not exceed the value defined in Table 4.5.2.4.5-3.

Table 4.5.2.4.5-2: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
0	1	1
1	0.5	1

Table 4.5.2.4.5-3: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
0	1	2+SMTC duration
1	0.5	2+SMTC duration

For asynchronous inter-band EN-DC, the UE is only allowed to cause interruptions on E-UTRA PCell immediately before and immediately after an SMTC. Each interruption on E-UTRA PCell shall not exceed 2 subframe.

The rate of correct events observed during repeated tests shall be at least 90%.

4.5.2.5 EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

4.5.2.5.1 Test purpose

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC.

4.5.2.5.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and 2 DL CA in E-UTRA.

4.5.2.5.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.2.5.

4.5.2.5.4 Test description

4.5.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.2.5.4.1-1.

Table 4.5.2.5.4.1-1: Supported test configurations

Configuration	Description
	LTE PCell + NR PSCell Note 2
4.5.2.5-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.5-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.5-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.2.5-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.5-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.5-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE.1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: The duplex mode of the LTE SCell is determined based on the band combination to be tested.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.2.5.4.1-2 and Table 4.5.2.5.4.1-3.

Table 4.5.2.5.4.1-2: Initial conditions for EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.5.2.5.4.1-3.
2. Message contents are defined in clause 4.5.2.5.4.3.
3. There are two E-UTRAN carriers and one NR carrier and three cells specified in the test. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR1 PSCell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 3 shall be configured according to Table A.6.1.1-1 except for the RF channel number 3. Cell 2 shall be configured according to clause C.1.1 and C.1.2.

Table 4.5.2.5.4.1-3: General test parameters for E-UTRAN - NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2. 3	Two E-UTRAN RF channels and one NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

4.5.2.5.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR1 PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. Cell1 shall be configured as E-UTRAN PCell, Cell2 shall be configured as NR PSCell and Cell3 shall be configured as E-UTRAN deactivated SCell. During T1 the UE shall be continuously scheduled on E-UTRAN PCell and NR PSCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall configure SCell (Cell 3) on the SCC as per TS 36.508 [25] clause 5.2A.

4. Set the parameters according to T1 in Tables 4.5.2.5.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

5. SS schedules on PCell and PSCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor DTX on PCell and ACK/NACK/DTX on PSCell.

6. If more than 99.5% of uplink transmissions on PSCell are received by SS then count a success for the event "ACK/NACK". Otherwise count a fail for the event "ACK/NACK".

6a. If no longer than X consecutive DTX on PCell is observed by the SS, then count a success for the event “PCell DTX”. Otherwise count a fail for the event “PCell DTX”. Where,

- For test configuration 4.5.2.5-1, 4.5.2.5-2 and 4.5.2.5-3,
  - X = 1 if the PCell is not in the same band as the deactivated SCell, otherwise X = 9.
- For test configuration 4.5.2.5-4, 4.5.2.5-5 and 4.5.2.5-6,
  - X = 1 if the PCell is not in the same band as the deactivated SCell, otherwise X = 5.

7. If no longer than Z consecutive DTX on PSCell is observed by the SS, then count a success for the event "PSCell DTX". Otherwise count a fail for the event "PSCell DTX".

- For test configuration 4.5.2.5-1 and 4.5.2.1-4,
  - Z = interruption length+k1 if k1 ≤ interruption length, otherwise Z = interruption length
- For test configuration other than 4.5.2.5-1 and 4.5.2.5-4,
  - Z = interruption length.

- Interruption length is given by "Interruption length X" column in Table 4.5.2.5.5-2 for inter-band case and by "Interruption length Y" column in Table 4.5.2.5.5-2 for intra-band case.

7a. The SS shall transmit *RRCConnectionReconfiguration* according to Table 4.5.2.5.4.3-4 to release the E-UTRAN SCell. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

8. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

9. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

10. Repeat step 2-9 until a test verdict has been achieved.

Each of the events "ACK/NACK" "PCell DTX" and "PSCell DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

4.5.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.2.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-10 with A3-offset = 15

Table 4.5.2.5.4.3-2: Void

Table 4.5.2.5.4.3-3: *RRCConnectionReconfiguration* in step 3: SCell addition

Derivation Path: 36.508 Table 4.6.1-8, condition SCell_AddMod			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
c1 CHOICE{			
rrcConnectionReconfiguration-r8 ::= SEQUENCE {			
measConfig	MeasConfig-DEFAULT	Table H.3.4-4	E-UTRA_Deactivated_SCell AND GAPLESS
}			
}			
}			
}			

Table 4.5.2.5.4.3-4: *RRCConnectionReconfiguration*

Derivation Path: 36.508 Table 4.6.1-8			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			

c1 CHOICE{			
rrcConnectionReconfiguration-r8 SEQUENCE {			
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v890-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v920-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1020-IEs	
sCellToReleaseList-r10 SEQUENCE (SIZE (1)) OF SCellToReleaseMod-r10 {			
SCellToReleaseMod-r10[1]	PhysCellId of Cell 3		
}			
}			
}			
}			
}			
}			
}			

4.5.2.5.5 Test requirement

Table 4.5.2.5.5-1 defines the primary level settings including test tolerances for E-UTRAN - NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC test configurations.

Table 4.5.2.5.5-1: NR cell specific test parameters for E-UTRAN - NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD

Parameter		Unit	Cell 2
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	3 for intra-band EN-DC, 33 for inter-band EN-DC
Propagation Condition			AWGN

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells.
NOTE 5: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in TS 38.213 [3] section 12.

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause one interruption on PCell and one interruption on PSCell. Each interruption on NR PSCell shall not exceed X defined in Table 4.5.2.5.5-2 if the NR PSCell is not in the same band as the E-UTRAN deactivated SCell or Y in Table Table 4.5.2.5.5-2 if the NR PSCell is in the same band as the E-UTRAN deactivated SCell.

Table 4.5.2.5.5-2: Interruption length X and Y at measurements on deactivated E-UTRA SCC

μ	NR Slot length (ms)	Interruption length X (slot)	Interruption length Y (slot)
0	1	1	1+SMTC duration
1	0.5	1	1+SMTC duration

Each interruption on E-UTRAN PCell shall not exceed 1 subframe if the PCell is not in the same band as the deactivated SCell, or 5 subframes if the PCell is in the same band as the deactivated SCell.

The rate of correct events observed during repeated tests shall be at least 90 %.

4.5.2.6 EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

4.5.2.6.1 Test purpose

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC.

4.5.2.6.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and 2 DL CA in E-UTRA.

4.5.2.6.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.2.6.

4.5.2.6.4 Test description

4.5.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.2.6.4.1-1.

Table 4.5.2.6.4.1-1: Supported test configurations for EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Configuration	Description
	LTE PCell + NR PSCell Note 2
4.5.2.6-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.6-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.6-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.2.6-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.6-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.6-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE.1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: The duplex mode of the LTE SCell is determined based on the band combination to be tested.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.2.6.4.1-2.

Table 4.5.2.6.4.1-2: Initial conditions for EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.5.2.6.4.1-3.
2. Message contents are defined in clause 4.5.2.6.4.3.

3. There are two E-UTRAN carriers and one NR carrier and three cells specified in the test. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR1 PSCell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 3 shall be configured according to Table A.6.1.1-1 except for the RF channel number 3. Cell 2 shall be configured according to clauses C.1.1 and C.1.2.

Table 4.5.2.6.4.1-3: General test parameters for EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	Two E-UTRAN RF channels and one NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell 2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

4.5.2.6.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR1 PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. Cell1 shall be configured as E-UTRAN PCell, Cell2 shall be configured as NR PSCell and Cell3 shall be configured as E-UTRAN deactivated SCell. During T1 the UE shall be continuously scheduled on E-UTRAN PCell and NR PSCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall configure SCell (Cell 3) on the SCC as per TS 36.508 [25] clause 5.2A.

4. Set the parameters according to T1 in Table 4.5.2.6.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

5. SS schedules on PCell and PSCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor DTX on PCell and ACK/NACK/DTX on PSCell.

6. If more than 99.5% of uplink transmissions on PSCell are received by SS then count a success for the event "ACK/NACK". Otherwise count a fail for the event "ACK/NACK".

6a. If no longer than X consecutive DTX on PCell is observed by the SS, then count a success for the event “PCell DTX”. Otherwise count a fail for the event “PCell DTX”. Where,

- For test configuration 4.5.2.6-1, 4.5.2.6-2 and 4.5.2.6-3,
  - X = 1 if the PCell is not in the same band as the deactivated SCell, otherwise X = 9.
- For test configuration 4.5.2.6-4, 4.5.2.6-5 and 4.5.2.6-6,
  - X = 1 if the PCell is not in the same band as the deactivated SCell, otherwise X = 5.

7. If no longer than Xconsecutive DTX on PSCell is observed by the SS, then count a success for the event "PSCell DTX". Otherwise count a fail for the event "PSCell DTX". Where,

- For test configuration 4.5.2.6-1 and 4.5.2.6-4,
  - Z = interruption length+k1 if k1 ≤ interruption length, otherwise Z = interruption length

- For test configuration other than 4.5.2.6-1 and 4.5.2.6-4,
  - Z = interruption length.
- Interruption length is given by Table 4.5.2.6.5-2 for inter-band case and Table 4.5.2.6.5-3 for intra-band case.

7a. The SS shall transmit *RRCConnectionReconfiguration* message with condition SCell_Rel according to 4.5.2.6.4.3-4 to release E-UTRA SCell. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

8. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

9. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until a test verdict has been achieved.

Each of the events "ACK/NACK" "PCell DTX" and "PSCell DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

4.5.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions.

Table 4.5.2.6.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-10 with A3-offset = 15

Table 4.5.2.6.4.3-2: Void

Table 4.5.2.6.4.3-3: *RRCConnectionReconfiguration* in step 3: SCell addition

Derivation Path: 36.508 Table 4.6.1-8, condition SCell_AddMod			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
c1 CHOICE{			
rrcConnectionReconfiguration-r8 ::= SEQUENCE {			
measConfig	MeasConfig-DEFAULT	Table H.3.4-4	E-UTRA_Deactivated_SCell AND GAPLESS
}			
}			
}			
}			

Table 4.5.2.6.4.3-4: *RRCConnectionReconfiguration* in step 7a: SCell release

Derivation Path: 36.508 Table 4.6.1-8			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfiguration ::= SEQUENCE {			
sCellToReleaseList-r10 SEQUENCE (SIZE (1..maxSCell-r10) OF SEQUENCE {	1 entry		
sCellIndex-r10[1]	Cell Index of Cell 3		
}			

4.5.2.6.5 Test requirement

Table 4.5.2.6.5-1 defines the primary level settings including test tolerances for EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC test configurations.

Table 4.5.2.6.5-1: NR cell specific test parameters for EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			

Parameter		Unit	Cell 2
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86
Time offset to Cell1 Note 4	Config 1,2,4,5	µs	500
	Config 3,6		250
Propagation Condition			AWGN

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells.

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on E-UTRAN PCell and NR PSCell. The UE is only allowed to cause one interruption on PCell and one interruption on PSCell . Each interruption on E-UTRAN PCell and NR PSCell shall not exceed the value defined in Table 4.5.2.6.5-2 and Table 4.5.2.6.5-3.

Table 4.5.2.6.5-2: Interruption duration if the NR PSCell is not in the same band as the E-UTRAN deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
0	1	2
1	0.5	2

Table 4.5.2.6.5-3: Interruption duration if the NR PSCell is in the same band as the E-UTRAN deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
0	1	2 + SMTC duration
1	0.5	2 + SMTC duration

Each interruption on E-UTRAN PCell shall not exceed 1 subframe if the PCell is not in the same band as the deactivated SCell, or 5 subframes if the PCell is in the same band as the deactivated SCell.

The rate of correct events observed during repeated tests shall be at least 90%.

4.5.2.7

4.5.2.8 E-UTRAN - NR FR1 interruptions at NR SRS carrier based switching in asynchronous EN-DC

4.5.2.8.1 Test purpose

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during carrier-based switching to one carrier not configured for PUCCH/PUSCH transmission from a CC with PUCCH/PUSCH transmission, when a UE needs to transmit aperiodic SRS.

4.5.2.8.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward supporting EN-DC and 2 DL CA in NR.

4.5.2.8.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.2.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.2.8.

4.5.2.8.4 Test description

4.5.2.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.2.8.4.1-1.

Table 4.5.2.8.4.1-1: Supported test configurations for EN-DC FR1 interruptions at SRS carrier based switching in asynchronous EN-DC

Configuration	Description
	LTE PCell + NR PSCell Note 2
4.5.2.8-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.8-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.8-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.2.8-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.8-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.8-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE.1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: The duplex mode of the LTE SCell is determined based on the band combination to be tested.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.2.8.4.1-2.

Table 4.5.2.8.4.1-2: Initial conditions for EN-DC FR1 interruptions at SRS carrier based switching in asynchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.2.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.5.2.8.4.1-3.
2. Message contents are defined in clause 4.5.2.8.4.3.
3. There are two NR carriers and one E-UTRA carrier, and three cells specified in the test. Each cell is on a different carrier. Cell1 Is E-UTRAN PCell, Cell2 is NR FR1 PSCell and Cell 3 is NR activated Scell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 and Cell 3 shall be configured according to clauses C.1.1 and C.1.2.

Table 4.5.2.8.4.1-3: General test parameters for EN-DC FR1 interruptions at SRS carrier based switching in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	Configured PSCell on NR RF channel number 2.
Configured SCell		Cell3	Configured activated secondary cell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3.
DRX		OFF	Continuous monitoring of primary cell
Filter coefficient		0	L3 filtering is not used
T1	s	5	
T2	ms	40	UE shall perform SRS switching during T2

4.5.2.8.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN Pcell, Cell2 is NR FR1 PSCell with PUCCH/PUSCH transmission, Cell3 is activated SCell which operates in downlink without PUCCH/PUSCH. The test consists of two time periods, with duration of T1 and T2. Prior to the start of the test, the UE is configured with the SRS carrier based switching between PSCell and SCell. UE shall also indicate SRS-SwitchingTimeNR in the capabilities.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG_and_SCG, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.7.

2. Configure MCG according to TS 36.521-3 [26] Annex C.0, C.1 and SCG according to Annex C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2 with the message exceptions as in 4.5.2.8.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

4. Set the parameters according to T1 in Table 4.5.2.8.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

5. The SS activates Scell (Cell3) and starts to schedule DL transmission continuously on PCell and PSCell and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK on PSCell.

6. Set the parameters according to T2 in Tables 4.5.2.8.5-1. T2 starts.

7. Immediately at the beginning of T2, SRS is requested via DCI format 2_3 and the UE shall initiate NR SRS switching.

8. If the interruption in the received ACK/NACK on NR PSCell during the switching from NR PSCell to NR SCell exceeds the value as defined in Table 4.5.2.8.5-2 or the interruption in the received ACK/NACK on E-UTRAN PCell during the switching from NR PSCell to NR SCell exceeds the value as defined in Table 4.5.2.9.5-3, increase the number of failed iterations by one and move to step 12, otherwise increase the number of passed iterations by one and continue with step 9.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

10. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

11. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

12. Repeat step 2-11 until a test verdict has been achieved.

4.5.2.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions.

Table 4.5.2.8.4.3-1: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
uplinkConfig SEQUENCE {			
carrierSwitching	*SRS-CarrierSwitching*		
}			
}			

Table 4.5.2.8.4.3-2: *SRS-CarrierSwitching*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-181			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-CarrierSwitching ::= SEQUENCE {			
srs-SwitchFromServCellIndex	1		
srs-SwitchFromCarrier	nUL		
}			

Table 4.5.2.8..4.3-3: SRS-Config

Derivation Path: TS 38.508-1 [14], Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SRS-ResourceSet {	1 entry		
SRS-ResourceSet[1] SEQUENCE {		entry 1	
srs-ResourceSetId	0		
srs-ResourceIdList SEQUENCE (SIZE(1..maxNrofSRS-ResourcesPerSet)) OF SRS-ResourceId {	1 entry		
SRS-ResourceId[1]	0	entry 1	
}			
resourceType CHOICE {			
aperiodic SEQUENCE {			
}			
}			
usage	antennaSwitching		
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SRS-Resource {	1 entry		
SRS-Resource[1] SEQUENCE {		entry 1	
resourceMapping SEQUENCE {			
startPosition	1		
nrofSymbols	n1		
repetitionFactor	n1		
}			
freqDomainPosition	0		
freqDomainShift	0		
freqHopping SEQUENCE {			
c-SRS	12		
}			

groupOrSequenceHopping	neither		
resourceType CHOICE {			
aperiodic SEQUENCE {			
}			
}			
}			
}			
}			

4.5.2.8.5 Test requirement

Table 4.5.2.8.5-1 defines the primary level settings including test tolerances for EN-DC FR1 interruptions at SRS carrier based switching in asynchronous EN-DC.

Table 4.5.2.8.5-1: NR cell specific test parameters for EN-DC FR1 interruptions at SRS carrier based switching in asynchronous EN-DC

Parameter		Unit	Cell2	Cell3
Frequency Range			FR1	FR1
Duplex mode	Config 1,4		FDD	TDD
	Config 2,3,5,6		TDD	TDD
TDD configuration	Config 1,4		Not Applicable	TDDConfig.1.2
	Config 2,5		TDDConf.1.2	TDDConfig.1.2
	Config 3,6		TDDConf.2.3	TDDConfig.2.3
$BW_{channel}$	Config 1,2,4,5	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
DL Initial BWP configuration	Config 1-6		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1-6		DLBWP.1.1	DLBWP.1.1
UL Initial BWP configuration	Config 1-6		ULBWP.0.1	-
UL dedicated BWP configuration	Config 1-6		ULBWP.1.1	-
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 TDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 TDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 TDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 TDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
SMTC configuration			SMTC.1	SMTC.1
SSB configuration	Config 1,2,4,5		SSB.1 FR1	SSB.1 FR1
	Config 3,6		SSB.2 FR1	SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	15 kHz
	Config 3,6		30 kHz	30 kHz
SRS Configuration	Config 1,2,4,5	kHz	-	SRS.4 TDD
	Config 3,6		-	SRS.5 TDD
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	-
	Config 3,6		30 kHz	-

EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-104	-104
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104	-104
	Config 3,6		-101	-101
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87	-87
	Config 3,6		-84	-84
$\hat{E}_s / I_{ot}$		dB	17	17
$\hat{E}_s / N_{oc}$		dB	17	17
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86	-52.86
Time offset to Cell1 Note 4		µs	-	3
Propagation condition		-	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

During the time duration T2, the interruption on NR PSCell during the switching from NR PSCell to NR SCell shall not exceed the value as defined in Table 4.5.2.8.5-2 dependent on the applied SRS carrier switching time.

Table 4.5.2.8.5-2: Interruption length on NR active serving cells at NR SRS carrier switching (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us)Note 1	Interruption length X1 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	3	3
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4

Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.

During the time duration T2, the interruption on E-UTRAN PCell during the switching from NR PSCell to NR SCell shall not exceed the value as defined in Table 4.5.2.8.5-3 dependent on the applied SRS carrier switching time.

Table 4.5.2.8.5-3: Interruption length on E-UTRAN active serving cells at NR SRS carrier switching

NR SRS carrier switching time (us)[note1]	Interruption length X1 (subframes)
≤500	2
900	3
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.	

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

4.5.2.9 E-UTRAN - NR FR1 interruptions at E-UTRA SRS carrier based switching

4.5.2.9.1 Test purpose

The purpose of this test is to verify the active serving cell in SCG interruptions during carrier-based switching to one PUSCH-less SCCs from a CC with PUSCH, when a UE needs to transmit aperiodic SRS.

4.5.2.9.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward supporting EN-DC and 2DL CA in E-UTRA.

4.5.2.9.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.2.0.5.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.2.9.

4.5.2.9.4 Test description

4.5.2.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.2.9.4.1-1.

Table 4.5.2.9.4.1-1: Supported test configurations for EN-DC FR1 interruptions at E-UTRA SRS carrier based switching supported test configurations

Configuration	Description
	LTE PCell + NR PSCell [Note 2]
4.5.2.9-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.9-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.9-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.2.9-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.2.9-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.2.9-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE.1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: The duplex mode of the LTE SCell is determined based on the band combination to be tested.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.2.9.4.1-2.

Table 4.5.2.9.4.1-2: Initial conditions for EN-DC FR1 interruptions at E-UTRA SRS carrier based switching supported test configurations

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.2.9.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.

Diagram	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.5.2.9.4.1-3 and SRS parameters are given in Table 4.5.2.9.4.1-4.

2. Message contents are defined in clause 4.5.2.9.4.3.

3. There are two E-UTRA carriers and one NR carrier, and three cells specified in the test. Each cell is on a different carrier. Cell1 is E-UTRA PCell, Cell2 is NR FR1 PSCell and Cell 3 is E-UTRA activated SCell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 3 shall be configured according to clauses C.1.1 and C.1.2.

Table 4.5.2.9.4.1-3: General test parameters for EN-DC FR1 interruptions at E-UTRA SRS carrier based switching supported test configurations

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and the other two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Activated SCell		Cell3	SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
T1	s	0.2	
T2	s	0.2	UE shall perform SRS switching during T2

Table 4.5.2.9.4.1-4: Sounding Reference Symbol Configuration for E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching

Field	Value	Comment
srsBandwidthConfiguration	bw5	
srsSubframeConfiguration	Sc8	Once every 5 subframes
ackNackSrsSimultaneousTransmission	FALSE	
srsMaxUpPTS	N/A	Not applicable
srsBandwidth	0	No hopping
srsHoppingBandwidth	hbw0	
frequencyDomainPosition	0	
Duration	TRUE	Indefinite duration
Srs-ConfigIndexAp	17	SRS periodicity of 10ms. See Table 8.2-5 in TS 36.213 for aperiodic SRS transmission.
transmissionComb	0	
cyclicShift	cs0	No cyclic shift
SRS-AntennaPort	an1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 36.331.		

4.5.2.9.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN Pcell, Cell2 is NR FR1 PSCell with PUCCH/PUSCH transmission, Cell3 is E-UTRAN activated SCell which operates in downlink without PUCCH/PUSCH. The test consists of two time periods, with duration of T1 and T2. Prior to the start of the test, the UE is configured with the SRS carrier based switching between PCell and SCell. UE shall also indicate SRS-SwitchingTimeNR in the capabilities.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG_and_SCG, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.7.

2. Configure MCG according to TS 36.521-3 [26] Annex C.0, C.1 and SCG according to Annex C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall configure SCell (Cell 3) on the SCC as per TS 36.508 [25] clause 5.2A, with the message content exceptions defined in clause 4.5.2.9.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

4. Set the parameters according to T1 in Table 4.5.2.9.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

5. The SS activates Scell (Cell3) and starts to schedule DL transmission continuously on PCell and PSCell and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK on PSCell.

6. Set the parameters according to T2 in Tables 4.5.2.9.5-1. T2 starts.

7. Immediately at the beginning of T2, SRS is requested via DCI format 2_3 and the UE shall initiate NR SRS switching.

8. If the interruption in the received ACK/NACK on NR PSCell during the switching from NR PSCell to E-UTRA SCell exceeds the value as defined in Table 4.5.2.9.5-2, increase the number of failed iterations by one and move to step 12, otherwise increase the number of passed iterations by one and continue with step 9.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

10. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

11. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

12. Repeat step 2-11 until a test verdict has been achieved.

4.5.2.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions.

Table 4.5.2.9.4.3-1: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
uplinkConfig SEQUENCE {			
carrierSwitching	*SRS-CarrierSwitching*		
}			
}			

Table 4.5.2.9.4.3-2: *SRS-CarrierSwitching*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-181			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-CarrierSwitching ::= SEQUENCE {			
srs-SwitchFromServCellIndex	0		
srs-SwitchFromCarrier	nUL		

}			

Table 4.5.2.9.4.3-3: SoundingRS-UL-Config

Derivation Path: 36.508 Table 4.6.3-22			
Information Element	**Value/remark**	**Comment**	**Condition**
SoundingRS-UL-ConfigDedicated-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
srs-BandwidthConfig	bw5		
srsSubframeConfig	Sc8		
ackNackSrsSimultaneousTransmission	FALSE		
srs-HoppingBandwidth	hbw0		
freqDomainPosition	0		
duration	TRUE		
srs-ConfigIndex	17	See Table 8.2-5 in TS 36.213	FDD
transmissionComb	0		
cyclicShift	cs0		
SRS-AntennaPort	an1		
}			
}			

4.5.2.9.5 Test requirement

Table 4.5.2.9.5-1 defines the primary level settings including test tolerances for EN-DC FR1 interruptions at E-UTRA SRS carrier based switching.

Table 4.5.2.9.5-1: NR cell specific test parameters for EN-DC FR1 interruptions at E-UTRA SRS carrier based switching

Parameter		**Unit**	**Cell2**
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.2
	Config 3,6		TDDConf.2.3
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD

	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	33
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells

The UE shall be continuously scheduled in NR PSCell throughout the test and during the time duration T2, Each interruption on NR PSCell shall not exceed X defined in Table A.4.5.2.9.2-1.

Table 4.5.2.9.5-2: Interruption length X (slot) E-UTRAN – NR at E-UTRA SRS carrier based switching

μ	NR Slot length (ms)	Interruption length X3 (slots)
0	1	2
1	0.5	3

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

4.5.2.10 EN-DC FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell

4.5.2.10.1 Test purpose

The purpose of this test is to verify the E-UTRAN PCell interruptions during the measurement on the deactivated NR PScell, the UE missed ACK/NACK does not exceed the limits.

To verify the missed ACK/NACK rate for E-UTRAN PCell in EN-DC

4.5.2.10.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 17 onwards and supporting RRM and RLM/BFD measurements on deactivated NR PSCell.

4.5.2.10.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.2.0.5.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.2.10.

4.5.2.10.4 Test description

4.5.2.10.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.2.10.4.1-1.

Table 4.5.2.10.4.1-1: Supported test configurations for EN-DC FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 4.5.2.10.4.1-2.

Table 4.5.2.10.4.1-2: Initial conditions for EN-DC FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.2.10.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.5.2.10.4.1-3 and SRS parameters are given in Table 4.5.2.10.4.1-4.

2. Message contents are defined in clause 4.5.2.10.4.3.

3. There are two cells (one E-UTRA carrier and one NR carrier) specified in the test. Cell1 is E-UTRAN PCell, and Cell2 is deactivated NR FR1 PSCell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 shall be configured according to clauses C.1.1 and C.1.2.

Table 4.5.2.10.4.1-3: General test parameters for E-UTRAN – NR interruptions due to measurements on deactivated PSCell in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is NR RF channel and the other is E-UTRAN RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured deactivated PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1, Cell2
DRX		OFF	
Measurement gap pattern Id		OFF	

SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

4.5.2.10.4.2 Test procedure

The test consists of two cells: Cell1 and Cell2. Cell1 is E-UTRAN PCell, and Cell2 is deactivated NR FR1 PSCell. The test consists of one single period, T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. At the start of T1, the RRC message including *measCycleSCell* or *allowInterruptions* is received at the UE antenna connector and Cell2 is deactivated. During T1. Cell1 shall be configured as E-UTRAN PCell, Cell2 shall be configured with RRM and RLM/BFD measurement on NR deactivated NR PSCell. During T1 the UE shall be continuously scheduled on E-UTRAN PCell and NR PSCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On according* to TS 38.508-1 [14] clause 4.5.

2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall configure PSCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 4.5.2.10.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

4. Set the parameters according to T1 in Table 4.5.2.10.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

5. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor DTX and ACK/NACK/DTX on PCell.

6. If more than 98.5% of uplink transmissions on PCell are received by SS then count a success for the event "ACK/NACK". Otherwise count a fail for the event "ACK/NACK".

7. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

8. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add and deactivate NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5.

9. Repeat step 2-8 until a test verdict has been achieved.

Each of the events "ACK/NACK", "PCell DTX" and "PSCell DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

4.5.2.10.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.2.10.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-8 with Condition SSB BFD Table H.3.1-8 with Condition SSB RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1 Table 4.6.3-19 in TS 38.508-1 [14] with condition RLM_BFD_PSCell

4.5.2.10.5 Test requirement

Table 4.5.2.10.5-1 defines the primary level settings for FR1 interruptions during measurements on deactivated PScell in synchronous EN-DC test configurations.

Table 4.5.2.10.5-1: NR cell specific test parameters for E-UTRAN – NR interruptions due to measurements on deactivated PSCell in synchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10: $N_{RB,c}$ = 52
	Config 2,5		10: $N_{RB,c}$ = 52
	Config 3,6		40: $N_{RB,c}$ = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			

EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 4		µs	500
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells

The UE shall be continuously scheduled in Cell1 during the entire length of T1 and the UE is configured with RRM and RLM/BFD measurements on the deactivated Cell2. During the time duration T1 the UE shall transmit at least 98.5% of ACK/NACK on E-UTRAN PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

4.5.3 SCell activation and deactivation delay

4.5.3.0 Minimum conformance requirements

4.5.3.0.1 SCell activation and deactivation delay

The requirements in this clause shall apply for the UE configured with one downlink SCell in EN-DC, or in standalone NR carrier aggregation or in NE-DC or in NR-DC and when one SCell is being activated.

The delay within which the UE shall be able to activate the deactivated SCell depends upon the specified conditions.

Upon receiving SCell activation command in slot *n*, the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot n + $\frac{T_{HARQ}+T_{activation_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where:

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in 38.213 [8].

$T_{activation_time}$ is the SCell activation delay in millisecond.

If the SCell is known and belongs to FR1, $T_{activation_time}$ is:

- $T_{FirstSSB}$ + 5ms, if the measurement period of the SCell being activated is equal to or smaller than 2400ms.
- $T_{FirstSSB_MAX}$ + T_{rs} + 5ms, if the measurement period of the SCell being activated is larger than 2400ms.

If the SCell is unknown and belongs to FR1, provided that the side condition $\hat{E}s/Iot \geq$ -2dB is fulfilled, $T_{activation_time}$ is:

- $T_{FirstSSB_MAX}$ + T_{SMTC_MAX} + 2*T_{rs} + 5ms.

If the SCell being activated belongs to FR2, and if there is at least one active serving cell on that FR2 band, then $T_{activation_time}$ is $T_{FirstSSB}$ + 5ms provided:

- The UE is provided with SMTC for the target SCell, and

- The SSBs in the serving cell(s) and the SSBs in the SCell fulfil the condition defined in TS 38.133 [6] clause 3.6.3.

- The parameter *ssb-PositionsInBurst* is same for the serving cell(s) and the SCell.

- SSB is in the same half-frame on the SCell and the contiguous FR2 active serving cell.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, if the UE is not provided with any SMTC for the target SCell, $T_{activation_time}$ is 3ms, provided

- the RS (s) of SCell being activated is (are) QCL-TypeD with RS (s) of one active serving cell on that FR2 band.

If the SCell being activated belongs to FR2 and if there is no active serving cell on that FR2 band provided that PCell or PSCell is FR1:

If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:

- 3 ms + max($T_{uncertainty_MAC}$ +$T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$), where $T_{uncertainty_MAC}$=0 and $T_{uncertainty_SP}$=0, if UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation command at the same time.

If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:

- max($T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC}$ + $T_{RRC_delay-THARQ}$), where $T_{uncertainty_MAC}$=0 if UE receives the SCell activation command and TCI state activation commands at the same time.

If the PCell/PSCell and the target SCell are configured as FR1-FR2 CA or if the PCell/PSCell and the target SCell are in a FR2 band pair with independent beam management, and the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq$ -2dB is fulfilled, then $T_{activation_time}$ is:

- 6ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + T_{HARQ} + max($T_{uncertainty_MAC}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$)

If the PCell/PSCell and the target SCell are configured as FR1-FR2 CA or if the PCell/PSCell and the target SCell are in a FR2 band pair with independent beam management, and the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq$ -2dB is fulfilled, then $T_{activation_time}$ is:

- 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max ((T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})).

Where,

T_{SMTC_MAX}:

- In FR1, in case of intra-band SCell activation, T_{SMTC_MAX} is the longer SMTC periodicity between active serving cells and SCell being activated provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot; in case of inter-band SCell activation, T_{SMTC_MAX} is the SMTC periodicity of SCell being activated.

- In FR2, T_{SMTC_MAX} is the longer SMTC periodicity between active serving cells and SCell being activated provided that in Rel-15 only support FR2 intra-band CA.

- T_{SMTC_MAX} is bounded to a minimum value of 10ms.

T_{rs} is the SMTC periodicity of the SCell being activated if the UE has been provided with an SMTC configuration for the SCell in SCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement which involves T_{rs} is applied with T_{rs} = 5ms assuming the SSB transmission periodicity is 5ms. There is no requirements if the SSB transmission periodicity is not 5ms.

$T_{FirstSSB}$: Is the time to the end of the first complete SSB burst indicated by the SMTC, or within 5ms if SMTC is not configured, after n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

$T_{FirstSSB_MAX}$: Is the time to the end of the first complete SSB burst indicated by the SMTC, or within 5ms if SMTC is not configured, after slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, further fulfilling:

- In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCell being activated is transmitting SSB burst.
- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

$T_{FineTiming}$ is the time period between UE finish processing the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and the timing of first complete available SSB corresponding to the TCI state

$T_{L1\text{-}RSRP,\ measure}$ is L1-RSRP measurement delay $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ ms or $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ based on applicability as defined in TS 38.133 [6] clause 9.5 assuming M=1.

$T_{L1\text{-}RSRP,report}$ is delay of acquiring CSI reporting resources.

$T_{uncertainty_MAC}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{uncertainty_SP}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{uncertainty_RRC}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

T_{RRC_delay} is the RRC procedure delay as specified in [13].

Longer delays for RRM measurement requirements, and in case of FR2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

When *absoluteFrequencySSB* is not configured in *DownlinkConfigCommon* for target SCell but SMTC for target SCell is configured, no requirement would be applied.$T_{CSI_reporting}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13].

SCell in FR1 is known if it has been meeting the following conditions:

- During the period equal to max(5 measCycleSCell, 5 DRX cycles) for FR1 before the reception of the SCell activation command:
  - the UE has sent a valid measurement report for the SCell being activated and
  - the SSB measured remains detectable according to the cell identification conditions specified in TS 38.133 [6] section 9.2 and 9.3.

- the SSB measured during the period equal to max(5 measCycleSCell, 5 DRX cycles) also remains detectable during the SCell activation delay according to the cell identification conditions specified in TS 38.133 [6] section 9.2 and 9.3.

Otherwise SCell in FR1 is unknown.

The requirements for FR1 unknown SCell activation specified in this clause apply when one of the following conditions is met

- 'ssb-PositionInBurst' indicates only one SSB is being actually transmitted, or
- 'ssb-PositionInBurst' indicates multiple SSBs and TCI indication is provided in same MAC PDU with SCell activation.

For the first SCell activation in FR2 bands, the SCell is known if it has been meeting the following conditions:

- During the period equal to 4s for UE supporting power class1 and 3s for UE supporting power class 2/3/4 before UE receives the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable):
  - the UE has sent a valid L3-RSRP measurement report with SSB index
  - SCell activation command is received after L3-RSRP reporting and no later than the time when UE receives MAC-CE command for TCI activation
- During the period from L3-RSRP reporting to the valid CQI reporting, the reported SSBs with indexes remain detectable according to the cell identification conditions specified in TS 38.133 [6] clause 9.2 and 9.3, and the TCI state is selected based on one of the latest reported SSB indexes.

Otherwise, the first SCell in FR2 band is unknown. The requirement for unknown SCell applies provided that the activation commands for PDCCH TCI, PDSCH TCI (when applicable), semi-persistent CSI-RS for CQI reporting (when applicable), and configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) are based on the latest valid L1-RSRP reporting.

If the UE has been provided with higher layer in TS 38.331 [13] signalling of *smtc2* prior to the activation command, T_{SMTC_Scell} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. T_{SMTC_MAX} follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in [13] for a SCell at the first opportunities for the corresponding actions once the SCell is activated.

The starting point of an interruption window on spCell or any activated SCell, as specified in TS 38.133[6] clause 8.2, shall not occur before slot n+1+$\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot slot n+1+$\frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being activated, and T_X is:

- $T_{FirstSSB}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB}$;
- $T_{FirstSSB_MAX}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB_MAX}$;
- $T_{uncertainty_MAC}$ +$T_{FineTiming}$, for any scenario where $T_{activation_time}$ includes $T_{FineTiming.}$

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

The requirements in this clause and requirements on interruption due to SCell activation in TS 38.133[6] clause 8.2 apply provided that the SSB of the to-be-activated SCell is within the first active DL BWP of the SCell.Starting from the slot specified in clause 4.3 of TS 38.213 [8] (timing for secondary Cell activation/deactivation) and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [8] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

Upon receiving SCell deactivation command or upon expiry of the *sCellDeactivationTimer* in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

The starting point of an interruption on SpCell or any activated SCell in the same cell group as SCell being deactivated for NR standalone, EN-DC, NE-DC or NR-DC mode specified TS 38.133[6] in clause 8.2 shall not occur before slot $n+1+\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot $n+1+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$. where NR slot length is with respect to the numerology used in the SCell being deactivated.

Upon expiry of the *sCellDeactivationTimer* in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n + \frac{3ms}{NR\ slot\ length}$. The starting point of an interruption window on spCell or any activated SCell, as specified in TS 38.133 [6] clause 8.2, shall not occur before slot n+1 and not occur after slot $n+1+\frac{3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.

For a UE supporting *scellWithoutSSB-InterBandCA-r18* if the SCell being activated belongs to FR1 and if the UE is not provided with SSB configuration (*absoluteFrequencySSB*) in the target SCell (FrequencyInfoDL) nor SMTC configuration for the target SCell, and if there is one collocated active reference serving cell on different FR1 band, when the following conditions are fulfilled,

- The RTD between the target SCell and the collocated reference serving cell is within CP where CP is corresponding to the SCS of SSB-less SCell, and
- The EPRE difference at the UE is smaller than or equal to [30] dB, where EPRE difference is the power difference between TRS/A-TRS symbol on the SSB-less SCell and SSB symbol on the reference serving cell normalized by SCSs of SSB of reference Cell and A-TRS/P-TRS of SSB-less Cell., and
- The RS(s) of the SSB-less SCell being activated is (are) QCL-TypeA with TRS(s) of the SSB-less SCell being activated, and the TRS(s) of the SSB-less SCell being activated is (are) further QCL-TypeC with SSB(s) of an inter-band active serving cell, and the inter-band active serving cell shall be same as the reference serving cell.

where the reference serving cell can be indicated by higherlayer parameter *referenceCell-r18*. If UE is not indicated with *referenceCell-r18*, the reference serving cell is assumed to be the QCL-typeC source cell if there is only one active QCL-typeC source cell configured.

$T_{activation_time}$ is

- $T_{first_TRS} + T_{TRS}$ +5 ms, if aperiodic CSI-RS resources are not configured for SCell activation or UE do not support *aperiodicCSI-RS-FastScellActivation-r17*, when the the EPRE difference is smaller than or equal to 12 dB
- $T_{first_ATRS} + T_{gap} + T_{ATRS}$ + 5 ms if aperiodic CSI-RS resources are configured for SCell activation for UE supporting *aperiodicCSI-RS-FastScellActivation-r17*, when the the EPRE difference is smaller than or equal to 12 dB
- $T_{first_TRS} + 2*T_{TRS}$ +5 ms, when the EPRE difference is larger than 12 dB but smaller than or equal to [30] dB

For a UE supporting *scellWithoutSSB-InterBandCA-r18*, when UE receive SCell activation command for more than one SSB-less SCell, the SCell activation delay for each of the to-be-activated SCell is the same as the single SCell activation delay, when

- SSB-less SCells being activated are on different bands, or
- all SCells being activated are SSB-less SCells, the SCells are contiguous on the same band, and all to-be-activated SCells have the same QCL-typeC QCL source cell.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.2.

4.5.3.1 EN-DC FR1 SCell activation and deactivation of known SCell in non-DRX for 160ms SCell measurement cycle

4.5.3.1.1 Test purpose

This test is to verify that the SCell activation and deactivation times are within the requirements, when the SCell in FR1 is known by the UE at the time of activation.

4.5.3.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards and supporting 2DL CA in NR.

4.5.3.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.3.1.

4.5.3.1.4 Test description

4.5.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for LTE PCell and NR PSCell are shown in Table 4.5.3.1.4.1-1. Supported test configurations for NR SCell are shown in Table 4.5.3.1.4.1-1A below. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

Table 4.5.3.1.4.1-1: supported test configurations for LTE PCell and NR PSCell

Config	Description
4.5.3.1-1	LTE FDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode
4.5.3.1-2	LTE FDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode
4.5.3.1-3	LTE FDD, NR 30 kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode
4.5.3.1-4	LTE TDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode
4.5.3.1-5	LTE TDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode
4.5.3.1-6	LTE TDD, NR 30 kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table 4.5.3.1.4.1-1A: supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 4.5.3.1.4.1-2 and Table 4.5.3.1.4.1-3.

Table 4.5.3.1.4.1-2: Initial conditions for known FR1 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.3.1.5-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.1	

Exceptions to connection diagram	N/A	

Table 4.5.3.1.4.1-3: General test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in section A.3.7.2.1 of TS38.133 [6]
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell3 timing offset to cell2	µs	0	
Time alignment error between cell3 and cell2	µs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1*NR slot length	k1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by dl-DataToUL-ACK, the value of k should be the minimum value defined in TS 38.213 [8]
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13]
K	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\mu} + 1$	As specified in section 4.3 of TS 38.213 [8]

1. Message contents are defined in clause 4.5.3.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells. Cell 2 is the PSCell and Cell 3 is the deactivated SCell.

4.5.3.1.4.2 Test procedure

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot m + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell or PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [23] section 7.32.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot n + $\frac{T_{\text{HARQ}}+3ms}{NR\ slot\ length}$. The starting point of any PSCell interruption due to the deactivation shall occur in the slot n + 1 + $\frac{T_{\text{HARQ}}}{NR\ slot\ length}$ to n + 1 + $\frac{T_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$. The starting point of any E-UTRA PCell interruption due to the deactivation shall occur in the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{EUTRA\ subframe\ length}$ to subframe $n_2 + 1 + \frac{T_{\text{HARQ}}+3\text{ms}}{EUTRA\ subframe\ length}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 4.5.3.1.5-1 and A.6.1.1-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 4.5.3.1.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

3a. The UE send a *MeasurementReport* message embedded in *ULInformationTransferMRDC.* If the TE doesn't receive the *MeasurementReport* during T1, go to step 9.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m and T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot s_{first_CSI} = m + 1 + $\frac{T_{\text{HARQ}}+3\text{ms}+T_{CSI_Reporting}}{NR\ slot\ length}$,

     - or slot $s^{int}_{first_CSI} = m + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting}+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot s_{first_CSI} was subject to interruption,

     - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI}$ = m + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$,

     - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

     - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if $s_{nonzero_CQI}$ was subject to interruption,

- and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

- Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 9.

7. When T2 expires, the SS deactivate SCC by sending the deactivation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n and T3 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 8, otherwise go to step 9.

8. The UE shall stop sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell during SCell deactivation.

   - If the last CSI report is received by the SS earlier than or equal to slot n + $\frac{\text{T}_{\text{HARQ}}+3ms}{NR\ slot\ length}$

   - and DTX is not observed by the SS outside the slot n + 1 + $\frac{\text{T}_{\text{HARQ}}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T3,

   - Then the number of successes for the event "Deactivation" is increased by one. Otherwise, count a fail for the event "Deactivation".

9. When T3 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 6, or Deactivation in step 7 was not acknowledged, the SS shall transmit an *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508[25] Table 4.6.1-8 to release NR PSCell. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

10. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

11. The SS shall transmit an *RRCConnectionReconfiguration* message with condition MCG and SCG according to TS 36.508 [25] Table 4.6.1-8 to ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. The UE shall transmit an RRCConnectionReconfigurationComplete message.

12. Repeat steps 2-11 until a test verdict has been achieved.

Each of the events "Activation" and "Deactivation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.
If all events pass, the test passes. If one event fails, the test fails.

4.5.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 4.5.3.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell

Table 4.5.3.1.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			

criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell	Table 4.5.3.1.4.3-5	
measConfig	MeasConfig	Table 4.5.3.1.4.3-2A	
}			
}			
}			

Table 4.5.3.1.4.3-2A: MeasConfig (Table 4.5.3.1.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 4.5.3.1.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 4.5.3.1.4.3-4	
}			
}			
}			
}			

Table 4.5.3.1.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 4.5.3.1.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
reportAmount	r16		
}			

}			
}			

Table 4.5.3.1.4.3-5: CellGroupConfig-SCell (Table 4.5.3.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 4.5.3.1.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 4.5.3.1.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 4.5.3.1.4.3-6: ServingCellConfig-SpCell (Table 4.5.3.1.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 4.5.3.1.4.3-7: ServingCellConfig-SCell (Table 4.5.3.1.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

4.5.3.1.5 Test requirement

Table 4.5.3.1.5-1 and Table 4.5.3.1.5-1A defines the primary level settings including test tolerances for all tests.

Table 4.5.3.1.5-1: Cell specific test parameters for for NR PSCell known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 2		
			T1	T2	T3
SSB ARFCN			freq1		
Duplex mode	Config 1,4		FDD		
	Config 2,3,5,6		TDD		

TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$		MHz	Note 7
$BW_{occupied}$	Config 1,2,4,5	RB	52 Note 5
	Config 3,6		106 Note 6
DL initial BWP configuration			DLBWP.0.1
DL dedicated BWP configuration			DLBWP.1.1
UL initial BWP configuration			ULBWP.0.1
UL dedicated BWP configuration			ULBWP.1.1
DRX Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 Note 5
	Config 3,6		OP.1 Note 6
SMTC configuration			SMTC.1
SSB configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2,5		CSI-RS.1.1 TDD
	Config 3,6		CSI-RS.2.1 TDD
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15
	Config 3,6		30
reportConfigType	Config 1-6		periodic
reportQuantity	Config 1-6		cri-RI-PMI-CQI
CSI reporting periodicity	Config 1,2,4,5	slot	5
	Config 3,6		10
CSI reporting offset	Config 1,2,4,5	slot	2
	Config 3,6		4
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	-104
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104
	Config 3,6		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP Note 3		dBm/15 kHz	-87
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96

	Config 3,6	dBm/38.16MHz	-52.87
Propagation condition		-	AWGN
Correlation Matrix and Antenna configuration			2x2 Low

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
NOTE 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]
NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table 4.5.3.1.5-1A: Cell specific test parameters for NR SCell for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 3		
			T1	T2	T3
SSB ARFCN			freq2		
Duplex mode	$Config_{SCell}$ 1		FDD		
	$Config_{SCell}$ 2,3		TDD		
TDD configuration	$Config_{SCell}$ 1		Not Applicable		
	$Config_{SCell}$ 2		TDDConf.1.1		
	$Config_{SCell}$ 3		TDDConf.2.1		
$BW_{channel}$		MHz	Note 7		
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 5		
	$Config_{SCell}$ 3		106 Note 6		
DL initial BWP configuration			DLBWP.0.1		
DL dedicated BWP configuration			DLBWP.1.1		
UL initial BWP configuration			ULBWP.0.1		
UL dedicated BWP configuration			ULBWP.1.1		
DRX Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD		
	$Config_{SCell}$ 2		SR.1.1 TDD		
	$Config_{SCell}$ 3		SR.2.1 TDD		
RMSI CORESET Reference Channel	$Config_{SCell}$ 1		CR.1.1 FDD		
	$Config_{SCell}$ 2		CR.1.1 TDD		
	$Config_{SCell}$ 3		CR.2.1 TDD		
RMC CORESET Reference Channel	$Config_{SCell}$ 1		CCR.1.1 FDD		
	$Config_{SCell}$ 2		CCR.1.1 TDD		
	$Config_{SCell}$ 3		CCR.2.1 TDD		
TRS configuration	$Config_{SCell}$ 1		TRS.1.1 FDD		
	$Config_{SCell}$ 2		TRS.1.1 TDD		
	$Config_{SCell}$ 3		TRS.1.2 TDD		
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 5		
	$Config_{SCell}$ 3		OP.1 Note 6		
SMTC configuration			SMTC.1		
SSB configuration	$Config_{SCell}$ 1,2		SSB.1 FR1		
	$Config_{SCell}$ 3		SSB.2 FR1		
CSI-RS configuration for CSI reporting	$Config_{SCell}$ 1		CSI-RS.1.1 FDD		
	$Config_{SCell}$ 2		CSI-RS.1.1 TDD		
	$Config_{SCell}$ 3		CSI-RS.2.1 TDD		
PDSCH/PDCCH subcarrier spacing	$Config_{SCell}$ 1,2	kHz	15		
	$Config_{SCell}$ 3		30		

reportConfigType			N/A
reportQuantity			N/A
CSI reporting periodicity		slot	N/A
CSI reporting offset		slot	N/A
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	-104
N_{oc} Note2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP Note3	$Config_{SCell}$ 1,2	dBm/SCS	-87
	$Config_{SCell}$ 3		-84
SCH_RP Note 3		dBm/15 kHz	-87
Io Note3	$Config_{SCell}$ 1,2	dBm/9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/38.16MHz	-52.87
Propagation condition		-	AWGN

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
NOTE 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]
NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

During T2 the UE shall send the first CSI report for SCell no later than the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot m + $\frac{T_{\text{HARQ}}+3ms}{\text{NR slot length}}$. UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in slot m + 1 + $\frac{T_{\text{HARQ}}+3ms+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ was interrupted or not is checked by monitoring ACK/NACK sent in PCell in slot m + 1 + $\frac{T_{\text{HARQ}}+3ms+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot m + $\frac{T_{\text{HARQ}}+T_{\text{activtion_time}}+T_{\text{CSI_Reporting}}}{NR\ slot\ length}$, $T_{\text{activation_time}} = T_{\text{FirstSSB}}$ + 5ms, as defined in TS 38.133 [6] section 8.3.

Figures 4.5.3.1.5-1 shows the deriviation of the Test procedure requreiment for DTX during T2, based on the core requirements for interruption.

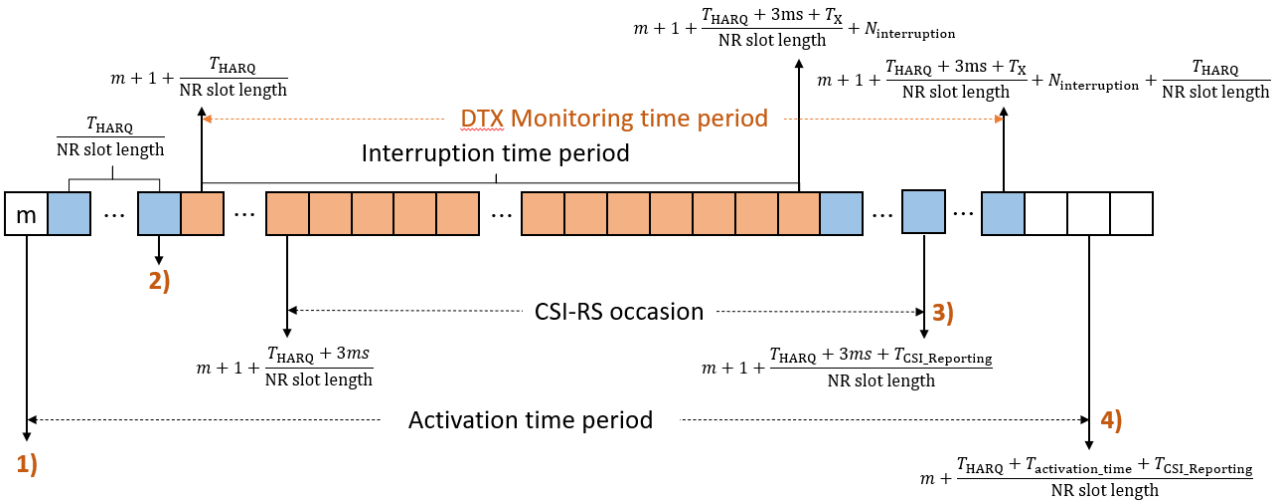

Figure 4.5.3.1.5-1: Procedure derivation for Activation

1) Activation command for SCell
2) ACK for MAC-CE for SCell1 activation
3) First CSI report timing (could be invalid CQI)
4) First non-zero CSI report transmission

During T3 the UE shall stop sending CSI reports for SCell at latest in a slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] section 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1 + \frac{T_{HARQ}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{EUTRA slot length}} + N_{interruption}$, as defined in TS 38.133 [6] section 8.3.

During T3 the starting point of interruption of PSCell during SCell deactivation shall not happen outside the slot n + $1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to n + $1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] section 8.3, and the starting point of interruption of E-UTRA PCell during SCell deactivation shall not happen outside the subframe $n_1 + 1 + \frac{T_{HARQ}}{EUTRA\ subframe\ length}$ to subframe $n_2 + 1 + \frac{T_{HARQ}+3ms}{EUTRA\ subframe\ length}$.

Figures 4.5.3.1.5-2 shows the deriviation of the Test procedure requreiment for NR PSCell DTX during T3, based on the core requirements for interruption.

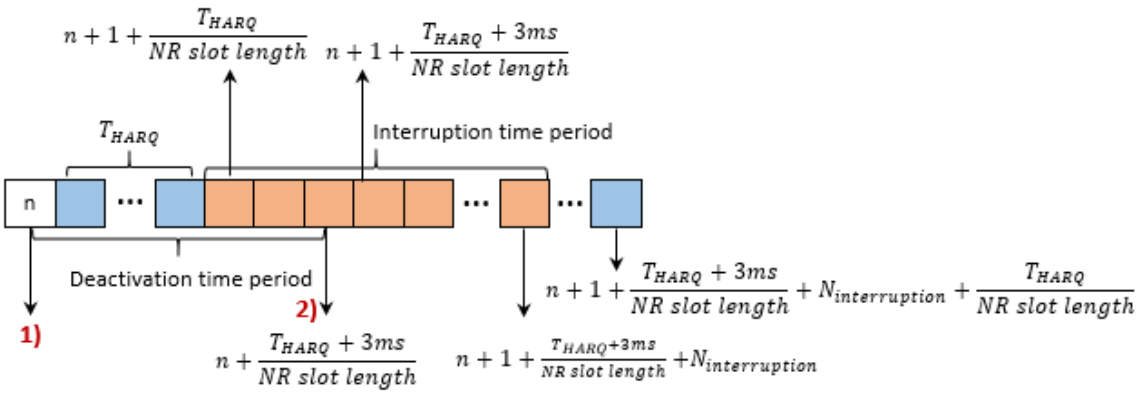

Figure 4.5.3.1.5-2: Procedure derivation for Deactivation

1) Deactivation command for SCell

2) Latest slot stop sending CSI reports for Scell

The interruption of PSCell shall not be more than the values specified for EN-DC in TS 38.133 [6] clause 8.2.1.2.4.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90 %.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in TS 38.133 [6] section 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

4.5.3.2 EN-DC FR1 SCell activation and deactivation of known SCell in non-DRX for 640ms SCell measurement cycle

4.5.3.2.1 Test purpose

This test is to verify that the SCell activation and deactivation times are within the requirements, when the SCell in FR1 is known by the UE at the time of activation.

4.5.3.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards and supporting 2DL CA in NR.

4.5.3.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.3.2.

4.5.3.2.4 Test description

4.5.3.2.4.1 Initial conditions

Same initial conditions as described in section 4.5.3.1.4.1 with following exception:

- The listed parameter values in Tables 4.5.3.2.4.1-2 will replace the values of corresponding parameters in Tables 4.5.3.1.4.1-3.

Table 4.5.3.2.4.1-1: Void

Table 4.5.3.2.4.1-2: General test parameters for known FR1 SCell activation case, 640ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

4.5.3.2.4.2 Test procedure

Same test procedure as described in section 4.5.3.1.4.2:

4.5.3.2.4.3 Message contents

Same message contents as described in section 4.5.3.1.4.3 with following exception:

- Table 4.5.3.1.4.3-3 is replaced by Table 4.5.3.2.4.3-1.

Table 4.5.3.2.4.3-1: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			

4.5.3.2.5 Test requirement

Same test requirement as described in section 4.5.3.1.5, except $T_{activation_time}$ will be replaced with the value $T_{FirstSSB_MAX} + T_{rs} + 5ms$.

4.5.3.3 EN-DC FR1 SCell activation and deactivation of unknown SCell in non-DRX

4.5.3.3.1 Test purpose

This test is to verify that the SCell activation and deactivation times are within the requirements, when the SCell in FR1 is unknown by the UE at the time of activation.

4.5.3.3.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards and supporting 2DL CA in NR.

4.5.3.3.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.3.3.

4.5.3.3.4 Test description

4.5.3.3.4.1 Initial conditions

Same initial conditions as described in section 4.5.3.1.4.1 with following exception:

- The listed parameter values in Tables 4.5.3.3.4.1-2 will replace the values of corresponding parameters in Tables 4.5.3.1.4.1-3.

Table 4.5.3.3.4.1-1: Void

Table 4.5.3.3.4.1-2: General test parameters for unknown FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
T1	ms	100	During this time the PSCell shall be known and the SCell configured, but not detected.

4.5.3.3.4.2 Test procedure

Same test procedure as described in section 4.5.3.1.4.2, except step 3and step 5 are replaced by following steps:

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 4.5.3.1.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete. The SCell (Cell 3) shall be powered OFF till T2 starts.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m, power ON the SCell (Cell3), T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

and:

- Step 3a is removed.

4.5.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 4.5.3.3.4.3-1: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 4.5.3.3.4.3-2	
}			
}			
}			

Table 4.5.3.3.4.3-2: CellGroupConfig (Table 4.5.3.3.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 4.5.3.3.4.3-3	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 4.5.3.3.4.3-4	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		

}			
}			
}			

Table 4.5.3.3.4.3-3: ServingCellConfig-SpCell (Table 4.5.3.3.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 4.5.3.3.4.3-4: ServingCellConfig-SCell (Table 4.5.3.3.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

4.5.3.3.5 Test requirement

Same test requirement as described in section 4.5.3.1.5, except $T_{activation_time}$ will be replaced with the value $T_{FirstSSB_MAX} + T_{SMTC_MAX} + 2*T_{rs} + 5ms$

4.5.3.4 SCell activation and deactivation of multiple unknown SCells in FR1 with single activation/deactivation command

Editor's Note: This test case is incomplete in following aspects:

- Message contents need further work.

4.5.3.4.1 Test purpose

This test is to verify that the SCell activation and deactivation times are within the requirements, when the two SCells in FR1 are unknown by the UE at the time of activation, with a single activation/deactivation command.

4.5.3.4.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards and supporting 3DL CA in NR.

4.5.3.4.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.3.4.

4.5.3.4.4 Test description

4.5.3.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for LTE PCell and NR PSCell are shown in Table 4.5.3.4.4.1-1. Supported test configurations for NR SCells are shown in Table

4.5.3.4.4.1-1A below. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

Table 4.5.3.4.4.1-1: supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table 4.5.3.4.4.1-1A: supported test configurations for NR SCells

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 4.5.3.4.4.1-2 and Table 4.5.3.4.4.1-3.

Table 4.5.3.4.4.1-2: Initial conditions for unknown FR1 SCells activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.3.1.5-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.1	
Exceptions to connection diagram	N/A		

Table 4.5.3.4.4.1-3: General test parameters for unknown FR1 SCells activation case with 2 deactivated SCells, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3,4	One E-UTRAN radio channel (1) and three NR radio channels (2,3,4) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in section A.3.7.2.1 of TS38.133 [6]
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell 1		Cell 3	Configured deactivated secondary cell on NR RF channel number 3 which is an intra-band contiguous CC to PSCC of Cell 2; ssb-PositionInBurst of Cell 3 is same as the one for Cell 2

Parameter	Unit	Value	Comment
Configured deactivated SCell 2		Cell 4	Configured deactivated secondary cell on NR RF channel number 4 which is an inter-band CC to PSCC of Cell 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell 3 timing offset to Cell 2	µs	0	
Cell 4 timing offset to Cell 2	µs	0	
Time alignment error between Cell 3 and Cell 2	µs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
Time alignment error between Cell 4 and Cell 2	µs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	100	During this time the PSCell shall be known and the SCell configured, but not detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1*NR slot length	k1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by dl-DataToUL-ACK, the value of k should be the minimum value defined in TS 38.213 [8]
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13]
K	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\mu} + 1$	As specified in section 4.3 of TS 38.213 [8]

1. Message contents are defined in clause 4.5.3.4.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2, Cell 3 and Cell 4 are NR FR1 cells. Cell 2 is the PSCell. Cell 3 and Cell 4 are the deactivated SCells.

4.5.3.4.4.2 Test procedure

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are four carriers, E-UTRA has one cell, NR has three cells. Cell 1 and Cell 2 have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) and Cell 4 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCells (Cell 3 and Cell 4) become configured on NR. During T1 the SCells (Cell 3 and Cell 4) are powered off and UE is not aware of SCells.

A MAC message for activation of SCells (Cell 3 and Cell 4) is sent by the test equipment 100ms after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCells is received at the UE antenna connector defines the start of time period T2. Immediately at beginning of T2 the transmission power of Cell 3 and Cell 4 are increased to the same level as for cell 2. The UE shall be able to report valid CSI for the activated SCells (Cell 3 and Cell 4) at latest in slot m + $\frac{T_{HARQ}+T_{activation_time_multiple_scells}+T_{CSI_Reporting}}{NR\ slot\ length}$ respectively as defined in Clause 8.3.7 in TS 38.133 [6] provided the SCells can be successfully detected on the first attempt. The UE shall start reporting CSI for cell 3 and cell 4 after at least one CSI-RS transmission occasion for channel measurement and

reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation for cell 3 and cell 4 has been completed, respectively. Any PSCell interruption due to activation of SCells shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3 in TS 38.133 [6], where $N_{\text{interruption}}$ is the interruption length given in section 8.2 in TS 38.133 [6]. Any E-UTRA PCell interruption due to activation of SCells shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.

Time period T3 starts when a MAC message for deactivation of the SCells (Cell 3 and Cell 4), sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the SCells at latest in slot $\text{n} + \frac{\text{T}_{\text{HARQ}}+3ms}{NR\ slot\ length}$ as defined in clause 8.3 in TS 38.133 [6]. The starting point of any PSCell interruption due to the deactivation shall occur in the slot $\text{n} + 1 + \frac{\text{T}_{\text{HARQ}}}{NR\ slot\ length}$ to $\text{n} + 1 + \frac{\text{T}_{\text{HARQ}}+3\text{ms}}{NR\ slot\ length}$, as defined in clause 8.3 in TS 38.133 [6]. The starting point of any E-UTRA PCell interruption due to the deactivation shall occur in the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{EUTRA\ subframe\ length}$ to subframe $\text{n}_2 + 1 + \frac{T_{\text{HARQ}}+3\text{ms}}{EUTRA\ subframe\ length}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 4.5.3.4.5-1 and A.6.1.1-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCells (Cell 3 and Cell 4) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 4.5.3.4.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete. The SCells (Cell 3 and Cell 4) shall be powered OFF till T2 starts.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m, power ON the SCells (Cell 3 and Cell 4), T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCells and the SS shall monitor CSI reports for SCells sent from the UE and ACK/NACK sent in PSCell according to the following criteria:

   - If the first CSI report for SCells is received by the SS no later than slot $s_{first_CSI} = \text{m} + 1 + \frac{\text{T}_{\text{HARQ}}+3\text{ms}+T_{CSI_Reporting}}{NR\ slot\ length}$,

     - or slot $s^{int}_{first_CSI} = m + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting}+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot s_{first_CSI} was subject to interruption,

     - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI} = \text{m} + \frac{T_{\text{HARQ}}+T_{\text{activation_time_multiple_scells}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$,

     - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

     - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if $s_{nonzero_CQI}$ was subject to interruption,

   - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

- Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 9.

7. When T2 expires, the SS deactivate SCC by sending the deactivation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n and T3 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 8, otherwise go to step 9.

8. The UE shall stop sending CSI reports for SCells and the SS shall monitor CSI reports for SCells sent from the UE and ACK/NACK sent in PSCell during SCells deactivation.

   - If the last CSI report is received by the SS earlier than or equal to slot n + $\frac{\mathrm{T_{HARQ}}+3ms}{NR\ slot\ length}$

   - and DTX is not observed by the SS outside the slot n + 1 + $\frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T3,

   - Then the number of successes for the event "Deactivation" is increased by one. Otherwise, count a fail for the event "Deactivation".

9. When T3 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 6, or Deactivation in step 7 was not acknowledged, the SS shall transmit an *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR PSCell. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

10. Set Cell 3 physical cell identity = ((current Cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop. Set Cell 4 physical cell identity = ((current Cell 4 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

11. The SS shall transmit an *RRCConnectionReconfiguration* message with condition MCG and SCG according to TS 36.508 [25] Table 4.6.1-8 to ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. The UE shall transmit an RRCConnectionReconfigurationComplete message.

12. Repeat steps 2-11 until a test verdict has been achieved.

Each of the events "Activation" and "Deactivation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.
If all events pass, the test passes. If one event fails, the test fails.

4.5.3.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 4.5.3.4.4.3-1: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 4.5.3.4.4.3-2	
}			
}			
}			

Table 4.5.3.4.4.3-2: CellGroupConfig (Table 4.5.3.4.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add

Information Element	Value/remark	Comment	Condition
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 4.5.3.4.4.3-3	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 4.5.3.4.4.3-4	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 4.5.3.4.4.3-3: ServingCellConfig-SpCell (Table 4.5.3.4.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 4.5.3.4.4.3-4: ServingCellConfig-SCell (Table 4.5.3.4.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

4.5.3.4.5 Test requirement

Table 4.5.3.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.5.3.4.5-1: Cell specific test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 3		Cell 4	
			T2	T3	T2	T3
SSB ARFCN			Freq2		Freq3	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52			
	Config 2,5		10: $N_{RB,c}$ = 52			
	Config 3,6		40: $N_{RB,c}$ = 106			
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1			
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1			

UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 FDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 FDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30kHz	
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)		dB	0	
N_{oc} Note2		dBm/15kHz	-104	
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104	
	Config 3,6		-101	
$\hat{E}_s / I_{ot}$		dB	17	
$\hat{E}_s / N_{oc}$		dB	17	
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87	
	Config 3,6		-84	
SCH_RP Note 3		dBm/15 kHz	-87	
Propagation condition		-	AWGN	

The test requirements defined in clause 4.5.3.1.5 shall apply to this test case for both Cell 3 and Cell 4, except the followings:

- For Cell 3 activation delay, $T_{activation_time}$ will be replaced with the value $T_{activation_time_multiple_scells} = T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs} + 5ms$.
- For Cell 4 activation delay, $T_{activation_time}$ will be replaced with the value $T_{activation_time_multiple_scells} = T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + 2*T_{rs} + 5ms$.

4.5.3.5 EN-DC FR1 direct SCell activation at SCell addition of known SCell

4.5.3.5.1 Test purpose

The purpose of this test is to verify that the direct SCell activation time is within the requirements, when the SCell in FR1 is known by the UE at the time of activation.

4.5.3.5.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards and supporting 2DL CA in NR and direct SCell activation.

4.5.3.5.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.3.5.

4.5.3.5.4 Test description

4.5.3.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for LTE PCell and NR PSCell are shown in Table 4.5.3.5.4.1-1. Supported test configurations for NR SCell are shown in Table 4.5.3.5.4.1-1A below. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

Table 4.5.3.5.4.1-1: known FR1 direct SCell activation supported test configurations for LTE PCell and NR PSCell

Config	Description
4.5.3.5-1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
4.5.3.5-2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
4.5.3.5-3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4.5.3.5-4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
4.5.3.5-5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
4.5.3.5-6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table 4.5.3.5.4.1-1A: supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 4.5.3.5.4.1-2 and Table 4.5.3.5.4.1-3.

Table 4.5.3.5.4.1-2: Initial conditions for known FR1 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.3.5.5-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.1	
Exceptions to connection	N/A		

diagram		

Table 4.5.3.5.4.1-3: General test parameters for known FR1 direct SCell activation

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in TS 38.133 [6] clause A.3.7.2.1
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
SCell		Cell 3	Secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every four slots.
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell3 timing offset to cell2	µs	0	
Time alignment error between cell3 and cell2	µs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the Cell 3 shall be known.
T2	s	1	During this time the UE shall activate the SCell.
A3-offset	dB	-15	
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [8]
$T_{CSI_Reporting}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13]
k	ms	$k_1 + 3 \cdot N_{slot}^{subframe,\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [8]

1.Message contents are defined in clause 4.5.3.5.4.3.

2.Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells. Cell 2 is the PSCell and Cell 3 is the known activated SCell.

4.5.3.5.4.2 Test procedure

The test consists of two successive time periods, with duration of T1 and T2, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR but is not aware of Cell 3 (SCell) on NR. The

UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

The point in time at which the RRC message for direct SCell activation is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. The test equipment sends the RRCConnectionReconfiguration message for the activation of the SCell within time period specified in TS 38.133 [6] clause 8.3.2 for known cell definition to ensure the configured SCell is known. The NR shall be using an *RRCConnectionReconfiguration* message with parameter *sCellState* set to *activated* for the SCell (Cell 3), which causes the SCell to become configured and activated on radio channel 3 (SCC). The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot m + $\frac{N_{\text{direct}}}{\text{NR slot length}}$, where N_{direct} is the time taken for direct SCell activation as defined in TS 38.133 [6] clause 8.3.4. The UE shall start reporting CSI in PSCell in slot (m+k+$T_{RRC_process}$), where $T_{RRC_process}$ is the RRC procedure delay as specified in clause 11.2 of TS 36.331 [29] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay defined in clause 12 of TS 38.331 [13]. It shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1$ to slot $m + 1 + \frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length} + N_{\text{interruption}}$, as defined in TS 38.133 [6] clause 8.3.4, where $N_{\text{interruption}}$ is the interruption length given in TS 38.133 [6] clause 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1$ to subframe $m_2 + 1 + \frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, Tx is the time to the end of the first complete the SSB burst as specified in TS 36.133 [6] clause 8.3.4, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [6] clause 7.32.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 4.5.3.5.5**-**1 and A.6.1.1-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 4.5.3.5.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

    a. The UE send a *MeasurementReport* message embedded in *ULInformationTransferMRDC.*

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The UE shall start reporting CSI in PSCell in slot (m+k+$T_{RRC_process}$) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed, and the SS shall monitor CSI reports for SCell sent from the UE according to the following criteria:

    - If the first CSI report for SCell is received by the SS no later than slot m + 1 + $\frac{\text{T}_{\text{HARQ}}+T_1+\text{ TRRC_process }+\text{T_(CSI_Reporting)}}{NR\ slot\ length}$,

        - or slot $m + 1 + \frac{T_{HARQ}+\text{TRRC_process}+T_(CSI_Reporting)+T_1+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot m + 1 + $\frac{\text{T}_{\text{HARQ}}+T_1+\text{TRRC_process}+\text{T_(CSI_Reporting)}}{NR\ slot\ length}$ was subject to interruption,

    - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot m + $\frac{N_{\text{direct}}}{\text{NR slot length}}$,

        - or the next available uplink resource if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{N_{\text{direct}}}{\text{NR slot length}}$

    - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+\text{TRRC_process}+T_1+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

- Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 6.

6. When T2 expires or a fail was counted for the event "Activation" in step 5, the SS shall transmit an *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508[25] Table 4.6.1-8 to release NR PSCell. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

7. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

8. The SS shall transmit an *RRCConnectionReconfiguration* message with condition MCG and SCG according to TS 36.508 [25] Table 4.6.1-8 to ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

9. Repeat steps 2-8 until a test verdict has been achieved.

The event "Activation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

4.5.3.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 4.5.3.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell

Table 4.5.3.5.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell	Table 4.5.3.5.4.3-5	
measConfig	MeasConfig	Table 4.5.3.5.4.3-2A	
}			
}			
}			

Table 4.5.3.5.4.3-2A: MeasConfig (Table 4.5.3.1.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 4.5.3.5.4.3-3	
}			

} reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 4.5.3.5.4.3-4	
}			
}			
}			
}			

Table 4.5.3.5.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 4.5.3.5.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 4.5.3.5.4.3-5: CellGroupConfig-SCell (Table 4.5.3.5.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 4.5.3.5.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 4.5.3.5.4.3-7	

smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
sCellState-r16	activated		
}			
}			
}			

Table 4.5.3.5.4.3-6: ServingCellConfig-SpCell (Table 4.5.3.5.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

Table 4.5.3.5.4.3-7: ServingCellConfig-SCell (Table 4.5.3.5.4.3-5)

4.5.3.5.5 Test requirement

Table 4.5.3.5.5-1 and Table 4.5.3.5.5-1A defines the primary level settings including test tolerances for all tests.

Table 4.5.3.5.5-1: Cell specific test parameters for NR PSCell for known FR1 direct SCell activation

Parameter		**Unit**	**Cell 2**	
			T1	**T2**
SSB ARFCN			**freq1**	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		40: $N_{RB,c}$ = 106	
DL initial BWP configuration	Config 1,2,3,4,5,6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2,3,4,5,6		DLBWP.1.1	

UL initial BWP configuration	Config 1,2,3,4,5,6		ULBWP.0.1
UL dedicated BWP configuration	Config 1,2,3,4,5,6		ULBWP.1.1
DRx Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz
	Config 3,6		30kHz
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2,5		CSI-RS.1.1 TDD
	Config 3,6		CSI-RS.2.1 TDD
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15
	Config 3,6		30
reportConfigType	Config 1-6		periodic
reportQuantity	Config 1-6		cri-RI-PMI-CQI
CSI reporting periodicity	Config 1,2,4,5	slot	5
	Config 3,6		10
CSI reporting offset	Config 1,2,4,5	slot	2
	Config 3,6		4
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			

EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	-104~~+TT~~
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104~~+TT~~
	Config 3,6		-101~~+TT~~
$\hat{E}_s / I_{ot}$		dB	17~~+TT~~
$\hat{E}_s / N_{oc}$		dB	17~~+TT~~
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87~~+TT~~
	Config 3,6		-84~~+TT~~
SCH_RP Note 3		dBm/15 kHz	-87~~+TT~~
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

Table 4.5.3.5.5-1A: Cell specific test parameters for NR SCell for known FR1 direct SCell activation

Parameter		Unit	Cell 3	
			T1	T2
SSB ARFCN			**freq2**	
Duplex mode	$Config_{SCell}$ 1		FDD	
	$Config_{SCell}$ 2,3		TDD	
TDD configuration	$Config_{SCell}$ 1		Not Applicable	
	$Config_{SCell}$ 2		TDDConf.1.1	
	$Config_{SCell}$ 3		TDDConf.2.1	
$BW_{channel}$	$Config_{SCell}$ 1	MHz	10: $N_{RB,c}$ = 52	
	$Config_{SCell}$ 2		10: $N_{RB,c}$ = 52	
	$Config_{SCell}$ 3		40: $N_{RB,c}$ = 106	
DL initial BWP configuration	$Config_{SCell}$ 1,2,3		DLBWP.0.1	
DL dedicated BWP configuration	$Config_{SCell}$ 1,2,3		DLBWP.1.1	
UL initial BWP configuration	$Config_{SCell}$ 1,2,3		ULBWP.0.1	
UL dedicated BWP configuration	$Config_{SCell}$ 1,2,3		ULBWP.1.1	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD	
	$Config_{SCell}$ 2		SR.1.1 TDD	
	$Config_{SCell}$ 3		SR.2.1 TDD	
RMSI CORESET	$Config_{SCell}$ 1		CR.1.1 FDD	

Reference Channel	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
RMC CORESET Reference Channel	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
TRS configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC configuration			SMTC.1
SSB configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	$Config_{SCell}$ 1,2	kHz	15
	$Config_{SCell}$ 3		30
CSI-RS configuration for CSI reporting	$Config_{SCell}$ 1		CSI-RS.1.1 FDD
	$Config_{SCell}$ 2		CSI-RS.1.1 TDD
	$Config_{SCell}$ 3		CSI-RS.2.1 TDD
PDSCH/PDCCH subcarrier spacing	$Config_{SCell}$ 1,2	kHz	15
	$Config_{SCell}$ 3		30
reportConfigType	$Config_{SCell}$ 1-3		periodic
reportQuantity	$Config_{SCell}$ 1-3		cri-RI-PMI-CQI
CSI reporting periodicity	$Config_{SCell}$ 1,2	slot	5
	$Config_{SCell}$ 3		10
CSI reporting offset	$Config_{SCell}$ 1,2	slot	2
	$Config_{SCell}$ 3		4
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	-104~~+TT~~
N_{oc} Note2	$Config_{SCell}$ 1,2	dBm/SCS	-104~~+TT~~
	$Config_{SCell}$ 3		-101~~+TT~~
$\hat{E}_s / I_{ot}$		dB	17~~+TT~~
$\hat{E}_s / N_{oc}$		dB	17~~+TT~~
SS-RSRP Note3	$Config_{SCell}$ 1,2	dBm/SCS	-87~~+TT~~
	$Config_{SCell}$ 3		-84~~+TT~~
SCH_RP Note 3		dBm/15 kHz	-87~~+TT~~
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is

	assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot ($m+k+T_{RRC_process}$). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot ($m+k+T_{RRC_process}$) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot ($m+k+T_{RRC_process}$).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $m + \frac{N_{direct}}{NR\ slot\ length}$. $N_{direct} = T_{RRC_Process} + T_1 + T_{activation_time} + T_{CSI_Reporting}$ - 3ms, where $T_{RRC_Process}$ = 20 ms and other components are defined in TS 38.133 [6] clause 8.3.4.

During T2 interruption of PSCell during direct SCell activation shall not happen outside the slot $m + 1$ to $m + 1 + \frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length} + N_{\text{interruption}}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1$ to subframe $m_2 + 1 + \frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length} + N_{\text{interruption}}$, as defined in TS 38.133 [6] clause 8.3.4.

The interruption of PSCell shall not be more than the values specified for EN-DC in TS 38.133 [6] clause 8.2.1.2.8.

All the above test requirements shall be fulfilled for the observed direct SCell activation delay to be counted as correct. The rate of correct observed direct SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length}$ as defined in TS 38.133 [6] clause 8.3.4 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

4.5.3.6 EN-DC FR1 fast SCell Activation of known SCell in non-DRX for 160ms SCell measurement cycle

4.5.3.6.1 Test purpose

The purpose of this test is to verify that the fast SCell activation times are within the requirements stated in TS 38.133 [6] clause 8.3.16, when the SCell in FR1 is known by the UE at the time of activation.

4.5.3.6.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 17 onwards and supporting 2DL CA in NR and fast SCell activation.

4.5.3.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.16.

4.5.3.6.4 Test description

4.5.3.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for LTE PCell, NR PSCell and NR SCell are shown in Table 4.5.3.6.4.1-1.

Table 4.5.3.6.4.1-1: fast known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 4.5.3.6.4.1-2 and Table 4.5.3.6.4.1-3.

Table 4.5.3.6.4.1-2: Initial conditions for fast known FR1 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.3.5.5-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.1	
Exceptions to connection diagram	N/A		

Table 4.5.3.6.4.1-3: General test parameters for fast known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in TS 38.133 [6] clause A.3.7.2.1
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell3 timing offset to cell2	µs	0	
Time alignment error between cell3 and cell2	µs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.

T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
A3-offset	dB	-15	
T_{HARQ}	ms	k_1NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in TS 38.213 [8]
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\mu} + 1$	As specified in clause 4.3 of TS 38.213 [8]

1. Message contents are defined in clause 4.5.3.6.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells. Cell 2 is the PSCell and Cell 3 is the known activated SCell.

4.5.3.6.4.2 Test procedure

The test consists of two successive time periods, with duration of T1 and T2, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell and triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot m + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in TS 38.133 [6] clause 8.3. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in TS 38.133 [6] clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in TS 38.133 [6] clause 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [23] clause 7.32.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation of SCell. The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 4.5.3.6.5-1 and A.6.1.1-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 4.5.3.6.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

3a. The UE send a *MeasurementReport* message embedded in *ULInformationTransferMRDC.*

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.55) in a slot # denoted m and T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 7.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot $s_{first_CSI} = \mathrm{m} + 1 + \frac{\mathrm{T_{HARQ}} + 3\mathrm{ms} + T_{CSI_Reporting}}{NR\ slot\ length}$,

   - or slot $s^{int}_{first_CSI} = m + 1 + \frac{T_{HARQ} + 3ms + T_{CSI_Reporting} + T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot s_{first_CSI} was subject to interruption,

   - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI} = \mathrm{m} + \frac{T_{\mathrm{HARQ}} + T_{\mathrm{activation_time}} + T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$, where $\mathrm{T_{activation_time}} = \mathrm{T_{FirstATRS}} + 5\mathrm{ms}$, as defined in TS 38.133 [6] clause 8.3.16,

   - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

   - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if $s_{nonzero_CQI}$ was subject to interruption,

   - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $m + 1 + \frac{T_{HARQ} + \mathrm{TRRC_process} + T_1 + T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

   - Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 6, the SS shall transmit an *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508[25] Table 4.6.1-8 to release NR PSCell. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit an *RRCConnectionReconfiguration* message with condition MCG and SCG according to TS 36.508 [25] Table 4.6.1-8 to ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. The UE shall transmit an RRCConnectionReconfigurationComplete message.

The event "Activation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

4.5.3.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 4.5.3.6.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell

Table 4.5.3.6.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell	Table 4.5.3.6.4.3-5	
measConfig	MeasConfig	Table 4.5.3.6.4.3-2A	
}			
}			
}			

Table 4.5.3.6.4.3-2A: MeasConfig (Table 4.5.3.1.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 4.5.3.6.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 4.5.3.6.4.3-4	
}			
}			
}			
}			

Table 4.5.3.6.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			

smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 4.5.3.6.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 4.5.3.6.4.3-5: CellGroupConfig-SCell (Table 4.5.3.6.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 4.5.3.6.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 4.5.3.6.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 4.5.3.6.4.3-6: ServingCellConfig-SpCell (Table 4.5.3.6.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6 with condition FastActivation_SCell		
servingCellMO	2		
}			

Table 4.5.3.6.4.3-7: ServingCellConfig-SCell (Table 4.5.3.6.4.3-5)

4.5.3.6.5 Test requirement

Table 4.5.3.6.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.5.3.6.5-1: Cell specific test parameters for fast known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		**Unit**	**Cell 2**		**Cell 3**	
			T1	**T2**	**T1**	**T2**
SSB ARFCN			**freq1**		**freq2**	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
$BW_{channel}$	Config 1,4	MHz	Note 7			
	Config 2,5		Note 7			
	Config 3,6		Note 7			
$BW_{occupied}$	Config 1,4	RB	52 Note 5			
	Config 2,5		52 Note 5			
	Config 3,6		106 Note 6			
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1			
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1			
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1			
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1			
Aperiodic CSI-RS for Scell activation	Config 1,4		N/A		TRS.1.3 FDD	
	Config 2,5		N/A		TRS.1.3 TDD	
	Config 3,6		N/A		TRS.1.4 TDD	
gapBetweenBursts		Slot	N/A			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD	
RMC CORESET	Config 1,4		CCR.1.1 FDD		CCR.1.1 FDD	

Reference Channel	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 Note 5	
	Config 3,6		OP.1 Note 6	
SMTC configuration			SMTC.1	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2,5		CSI-RS.1.1 TDD	
	Config 3,6		CSI-RS.2.1 TDD	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15	
	Config 3,6		30	
reportConfigType	Config 1-6		periodic	
reportQuantity	Config 1-6		cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5	slot	5	N/A
CSI reporting offset	Config 3,6	slot	10	N/A
	Config 1,2,4,5		2	N/A
	Config 3,6		4	N/A
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-104	
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104	
	Config 3,6		-101	
$\hat{E}_s / I_{ot}$		dB	17	
$\hat{E}_s / N_{oc}$		dB	17	
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87	NA
	Config 3,6		-84	NA
CSI-RSRP Note3	Config 1,2,4,5	dBm/SCS	NA	-87
	Config 3,6		NA	-84
SCH_RP Note 3		dBm/15 kHz	-87	
Propagation condition		-	AWGN	
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96	
	Config 3,6	dBm/ 38.16MHz	-52.87	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]

Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7:	$N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1 with configured $BW_{channel}$.

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot (m+k).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS}$ + 5ms, as defined in TS 38.133 [6] clause 8.3. During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3\text{ms}+T_X}{\text{NR slot length}} + N_{\text{interruption}}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1 + \frac{T_{HARQ}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{HARQ}+3\text{ms}+T_X}{\text{EUTRA slot length}} + N_{\text{interruption}}$, as defined in TS 38.133 [6] clause 8.3. The interruption of PSCell shall not be more than the values specified for EN-DC in TS 38.133 [6] Clause 8.2.1.2.19.

All the above test requirements shall be fulfilled for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in TS 38.133 [6] clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

4.5.3.7 EN-DC FR1 fast SCell Activation of known SCell in non-DRX for 640ms SCell measurement cycle

4.5.3.7.1 Test purpose

The purpose of this test is to verify that the fast SCell activation times are within the requirements stated in TS 38.133 [6] clause 8.3.16, when the SCell in FR1 is known by the UE at the time of activation.

4.5.3.7.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 17 onwards and supporting 2DL CA in NR and fast SCell activation.

4.5.3.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.16.

4.5.3.7.4 Test description

4.5.3.7.4.1 Initial conditions

Same initial conditions as described in section 4.5.3.6.4.1 with following exception:

The listed parameter values in Tables 4.5.3.7.4.1-1 will replace the values of corresponding parameters in Tables 4.5.3.6.4.1-3. The listed parameter values in Tables 4.5.3.7.4.1-2 will replace the values of corresponding parameters in Tables 4.5.3.6.5-1.

Table 4.5.3.7.4.1-1: General test parameters for known FR1 SCell activation case, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment

SCell measurement cycle (measCycleSCell)	ms	640	

Table 4.5.3.7.4.1-2: Cell specific test parameters for known FR1 Scell activation case, 640ms Scell measurement cycle

Parameter		Unit	Cell 2		Cell 3	
			T1	T2	T1	T2
gapBetweenBursts		Slot	2			

4.5.3.7.4.2 Test procedure

Same test procedure as described in section 4.5.3.6.4.2:

4.5.3.7.4.3 Message contents

Same message contents as described in section 4.5.3.6.4.3 with following exception:

- Table 4.5.3.6.4.3-3 is replaced by Table 4.5.3.7.4.3-1.

Table 4.5.3.7.4.3-1: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf640		
}			

Table 4.5.3.7.4.3-2: SCellActivationRS-Config

Derivation Path: TS 38.508-1 [14], Table 7.3.1-6A			
Information Element	**Value/remark**	**Comment**	**Condition**
SCellActivationRS-Config-r17 ::= SEQUENCE {			
gapBetweenBursts-r17	2		
}			

4.5.3.7.5 Test requirement

Table 4.5.3.6.5-1 defines the primary level settings including test tolerances for all tests except the listed parameter values in Tables 4.5.3.7.5-1 will replace the values of corresponding parameters in Table 4.5.3.6.5-1.

Table 4.5.3.7.5-1: Cell specific test parameters for known FR1 Scell activation case, 640ms Scell measurement cycle

Parameter		Unit	Cell 2		Cell 3	
			T1	T2	T1	T2
SSB ARFCN			freq1		freq2	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
$BW_{channel}$	Config 1,4	MHz	Note 7			
	Config 2,5		Note 7			

	Config 3,6		Note 7	
$BW_{occupied}$	Config 1,4	RB	52 Note 5	
	Config 2,5		52 Note 5	
	Config 3,6		106 Note 6	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
Aperiodic CSI-RS for Scell activation	Config 1,4		N/A	TRS.1.3 FDD
	Config 2,5		N/A	TRS.1.3 TDD
	Config 3,6		N/A	TRS.1.4 TDD
gapBetweenBursts		Slot	2	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 FDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 FDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 Note 5	
	Config 3,6		OP.1 Note 6	
SMTC configuration			SMTC.1	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2,5		CSI-RS.1.1 TDD	
	Config 3,6		CSI-RS.2.1 TDD	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15	
	Config 3,6		30	
reportConfigType	Config 1-6		periodic	
reportQuantity	Config 1-6		cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5	slot	5	N/A
CSI reporting offset	Config 3,6	slot	10	N/A
	Config 1,2,4,5		2	N/A
	Config 3,6		4	N/A
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-104	
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104	

	Config 3,6		-101	
$\hat{E}_s/I_{ot}$		dB	17	
$\hat{E}_s/N_{oc}$		dB	17	
SS-RSRP[Note3]	Config 1,2,4,5	dBm/SCS	-87	NA
	Config 3,6		-84	NA
CSI-RSRP[Note3]	Config 1,2,4,5	dBm/SCS	NA	-87
	Config 3,6		NA	-84
SCH_RP [Note 3]		dBm/15 kHz	-87	
Propagation condition		-	AWGN	
Io[Note3]	Config 1,2,4,5	dBm/ 9.36MHz	-58.96	
	Config 3,6	dBm/ 38.16MHz	-52.87	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1 with configured $BW_{channel}$.

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot (m+k).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS} + T_{gap} + T_{ATRS}$+ 5ms, as defined in TS 38.133 [6] clause 8.3. During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3\text{ms}+T_X}{\text{NR slot length}} + N_{\text{interruption}}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1 + \frac{T_{HARQ}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{HARQ}+3\text{ms}+T_X}{\text{EUTRA slot length}} + N_{\text{interruption}}$, as defined in TS 38.133 [6] clause 8.3. The interruption of PSCell shall not be more than the values specified for EN-DC in TS 38.133 [6] Clause 8.2.1.2.19.

All the above test requirements shall be fulfilled for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in TS 38.133 [6] clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

4.5.3.8 to 4.5.3.10

4.5.3.11 EN-DC FR1 TRS-based SCell Activation of SSB-less SCell in FR1 collocated inter-band in non-DRX

Editor's note: This test case is incomplete. The following aspect is either missing or TBD:

- Test tolerance analysis and measurement uncertainty are missing.

4.5.3.11.1 Test purpose

The purpose of this test is to verify that the TRS based SCell activation times are within the requirements stated in TS 38.133 [6] clause 8.3.2, when the SCell is an SSB-less SCell on a FR1 band different from the reference cell (i.e., PSCell) and provided with periodic CSI-RS for tracking instead of SSB. The SCell and PSCell are collocated.

4.5.3.11.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 18 onwards and supporting 2DL CA in NR and inter-band SSB-less SCell operation.

4.5.3.11.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.2.

4.5.3.11.4 Test description

4.5.3.11.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for LTE PCell, NR PSCell and NR SCell are shown in Table 4.5.3.11.4.1-1.

Table 4.5.3.11.4.1-1: TRS-based SCell activation of SSB-less SCell in FRI inter-band supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 4.5.3.11.4.1-2 and Table 4.5.3.11.4.1-3.

Table 4.5.3.11.4.1-2: Initial conditions for TRS-based SCell activation of SSB-less SCell in FR1 inter-band

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.3.11.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.1	
Exceptions to connection diagram	N/A		

Table 4.5.3.11.4.1-3: General test parameters for TRS-based SCell activation of SSB-less SCell in FR1 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.1
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
Cell 3 timing offset to Cell 2	µs	Length of CP of Cell 3	
Time alignment error between Cell 3 and Cell 2	µs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	ms	100	During this time the PSCell shall be known and the SCell is configured but not detected.
T2	s	1	During this time the UE shall activate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [8]
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	slot	$k_1 + 3 \cdot N_{slot}^{subframe,\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [8]

1. Message contents are defined in clause 4.5.3.11.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells. Cell 2 is the PSCell and Cell 3 is the deactivated SCell. The NR band that indicates '*referenceBand*' in UE capability *supportOfSingleGroup* is configured as PSCell, and the NR band that indicates '*scellWithoutSSB*' in UE capability *supportOfSingleGroup* is configured as SCell. If both NR bands indicate '*both*' in UE capability *supportOfSingleGroup*, either of the two NR bands can be configured as a PSCell, and the other band is configured as an SCell.

4.5.3.11.4.2 Test procedure

The test consists of two successive time periods, with duration of T1 and T2, respectively. There are three carriers, E-UTRA has one cell; NR has two cells, where each NR cell has one carrier and these two carriers are collocated and on

different FR1 bands. SSB is not transmitted on the SCell hence the UE is not provided with SSB configuration (*absoluteFrequencySSB*) in the SCell (FrequencyInfoDL) nor SMTC configuration. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. The test equipment sends a MAC message for activation of the SCell and triggering the periodic CSI-RS for TRS-based SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot m + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, where in the case of SSB-less SCell $T_{\text{activation_time}}$ is defined as $T_{\text{First_TRS}}$ + T_{TRS} + 5 ms. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed.

Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, where $N_{\text{interruption}}$ is the interruption length given in clause 8.3 in 38.133 [6]. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation of SCell.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 4.5.3.11.5-1 and A.6.1.1-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 4.5.3.11.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE. The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m and T2 starts. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 7.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports in PSCell for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot $s_{first_CSI} = \text{m} + 1 + \frac{\text{T}_{\text{HARQ}}+3\text{ms}+T_{CSI_Reporting}}{NR\ slot\ length}$,

     - or slot $s^{int}_{first_CSI} = m + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting}+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot s_{first_CSI} was subject to interruption,

     - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

- and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI}$ = m + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, where $T_{\text{activation_time}} = T_{\text{First_TRS}} + T_{\text{TRS}} + 5$ ms, as defined in TS 38.133 [6] clause 8.3.2,
  - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,
  - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$,
- and DTX is not observed in NR PSCell by the SS outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$ up to the end of T2, where $N_{\text{interruption}}$ is the interruption length given in clause 8.3 in 38.133 [6].
- and DTX is not observed in E-UTRA PCell by the SS outside the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$ up to the end of T2, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.
- Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 6, the SS shall transmit an *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508[25] Table 4.6.1-8 to release NR PSCell. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS shall transmit an *RRCConnectionReconfiguration* message with condition MCG and SCG according to TS 36.508 [25] Table 4.6.1-8 to ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. The UE shall transmit an RRCConnectionReconfigurationComplete message.

The event "Activation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

4.5.3.11.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 4.5.3.11.4.3-1: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell	Table 4.5.3.11.4.3-2	
}			
}			
}			

Table 4.5.3.11.4.3-2: CellGroupConfig-SCell (Table 4.5.3.11.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add

Information Element	Value/remark	Comment	Condition
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell	Value 1 for EN-DC	
spCellConfigDedicated	ServingCellConfig-SpCell	Table 4.5.3.11.4.3-3	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigCommon	ServingCellConfigCommon-SCell	Table 4.5.3.11.4.3-5	
sCellConfigDedicated	ServingCellConfig-SCell	Table 4.5.3.11.4.3-4	
}			
}			
}			

Table 4.5.3.11.4.3-3: ServingCellConfig-SpCell (Table 4.5.3.11.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig-SCell	Table 4.5.3.11.4.3-8	
}			

Table 4.5.3.11.4.3-4: ServingCellConfig-SCell (Table 4.5.3.11.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-168 with condition No_UL and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
downlinkConfigCommon	DownlinkConfigCommon-SCell	Table 4.5.3.11.4.3-6	
}			

Table 4.5.3.11.4.3-5: ServingCellConfigCommon-SCell (Table 4.5.3.11.4.3-2)

Table 4.5.3.11.4.3-6: DownlinkConfigCommon-SCell (Table 4.5.3.11.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-52 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
frequencyInfoDL	FrequencyInfoDL	Table 4.5.3.11.4.3-7	
}			

Derivation Path: TS 38.508-1 [14], Table 4.6.3-59			
Information Element	**Value/remark**	**Comment**	**Condition**
FrequencyInfoDL::= SEQUENCE {			
absoluteFrequencySSB	Not present		
referenceCell-r18	ServCellIndex of NR SpCell	Value 1 for EN-DC	
}			

Table 4.5.3.11.4.3-7: *FrequencyInfoDL* (Table 4.5.3.11.4.3-6)

Table 4.5.3.11.4.3-8: *CSI-MeasConfig-SCell*

Derivation Path: TS 38.508-1 [14] Table 7.3.1-6			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-MeasConfig::= SEQUENCE {			
nzp-CSI-RS-ResourceToAddModList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-Resources)) OF NZP-CSI-RS-Resource {	n1+n2+n3 entries	n1=1 n2=0 n3=4	
NZP-CSI-RS-Resource[k, k=1..n1]	NZP-CSI-RS-Resource for CSI	entry 1, Table 4.5.3.11.4.3-9	n1>0
NZP-CSI-RS-Resource[k, k=n1+1.. n1+n2]	NZP-CSI-RS-Resource for BM (k-n1-1)	entry ...	n2>0
NZP-CSI-RS-Resource[k, k= n1+n2+1.. n1+n2+n3]	NZP-CSI-RS-Resource for TRS (k-n1-n2)	entry ..., Table 4.5.3.11.4.3-10	n3>0
}			
}			

Table 4.5.3.11.4.3-9: NZP-CSI-RS-Resource for CSI (Table 4.5.3.11.4.3-8)

Derivation Path: TS 38.508-1 [14] Table 7.3.1-7A			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
qcl-InfoPeriodicCSI-RS	TCI-StateId-RRM(2)	Table 4.5.3.11.4.3-11	
}			

Table 4.5.3.11.4.3-10: NZP-CSI-RS-Resource for TRS(Id) (Table 4.5.3.11.4.3-8)

Derivation Path: TS 38.508-1 [14] Table 7.3.1-7			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
qcl-InfoPeriodicCSI-RS	TCI-StateId-RRM(0)	Table 4.5.3.11.4.3-11	
}			

Table 4.5.3.11.4.3-11: *TCI-State(Id)*

Derivation Path: TS 38.508-1 [14] Table 7.3.1-19

Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {			
tci-StateId	TCI-StateId-RRM(Id)		
qcl-Type1 SEQUENCE {			
cell	ServCellIndex of NR SpCell		
bwp-Id	BWP-Id of the active BWP		Id = 2
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		Id = 0
csi-rs	NZP-CSI-RS-ResourceId for TRS (4)		Id = 2
}			
qcl-Type	typeC		Id = 0
	typeA		Id = 2
}			
}			

4.5.3.11.5 Test requirement

Table 4.5.3.11.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.5.3.11.5-1: Cell specific test parameters for TRS-based SCell activation of SSB-less SCell in FR1 inter-band

Parameter		Unit	Cell 2		Cell 3	
			T1	T2	T1	T2
SSB ARFCN			freq1		freq2	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
$BW_{channel}$	Config 1,4	MHz	Note 7			
	Config 2,5		Note 7			
	Config 3,6		Note 7			
$BW_{occupied}$	Config 1,4	RB	52 Note 5			
	Config 2,5		52 Note 5			
	Config 3,6		106 Note 6			
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1			
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1			
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1			
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1			
gapBetweenBursts		Slot	N/A			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference	Config 1,4		CR.1.1 FDD		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD	

Channel					
	Config 3,6			CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4			CCR.1.1 FDD	CCR.1.1 FDD
	Config 2,5			CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6			CCR.2.1 TDD	CCR.2.1 TDD
TRS configuration	Config 1,4			TRS.1.1 FDD	TRS.1.1 FDD
	Config 2,5			TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6			TRS.1.2 TDD	TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5			OP.1 Note 5	
	Config 3,6			OP.1 Note 6	
SMTC configuration	Config 1, 2, 3, 4, 5, 6			SMTC.1	Not Applicable
SSB configuration	Config 1,2,4,5			SSB.1 FR1	Not Applicable
	Config 3,6			SSB.2 FR1	Not Applicable
CSI-RS configuration for CSI reporting	Config 1,4			CSI-RS.1.1 FDD	
	Config 2,5			CSI-RS.1.1 TDD	
	Config 3,6			CSI-RS.2.1 TDD	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz		15	
	Config 3,6			30	
reportConfigType	Config 1-6			periodic	
reportQuantity	Config 1-6			cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5	slot		5	N/A
CSI reporting offset	Config 3,6	slot		10	N/A
	Config 1,2,4,5			2	N/A
	Config 3,6			s	N/A
EPRE ratio of PSS to SSS				0	N/A
EPRE ratio of PBCH DMRS to SSS				0	N/A
EPRE ratio of PBCH to PBCH DMRS				0	N/A
EPRE ratio of PDCCH DMRS to SSS				0	N/A
EPRE ratio of PDCCH to PDCCH DMRS		dB		0	N/A
EPRE ratio of PDSCH DMRS to SSS				0	N/A
EPRE ratio of PDSCH to PDSCH				0	
EPRE ratio of OCNG DMRS to SSS(Note 1)				0	N/A
EPRE ratio of OCNG to OCNG DMRS (Note 1)				0	
N_{oc} Note2		dBm/15kHz		-104+TT	
N_{oc} Note2	Config 1,2,4,5	dBm/SCS		-104+TT	
	Config 3,6			-101+TT	
$\hat{E}_s / I_{ot}$		dB		10+TT	$10+\Delta_{EPRE}$ Note 9+TT
$\hat{E}_s / N_{oc}$		dB		10+TT	$10+\Delta_{EPRE}$ Note 9+TT
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS		-87+TT	NA
	Config 3,6			-84+TT	NA
SCH_RP Note 3		dBm/15 kHz	-87	NA	
Propagation condition		-		AWGN	
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96	NA	
	Config 3,6	dBm/ 38.16MHz	-52.87	NA	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3:	SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]
Note 5:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7:	$N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8:	The SSB in referenceSignal in the TCI state is configured as the SSB in Cell 2.
Note 9:	Δ_{EPRE} is configured as different values to verify different requirements defined in 4.5.3.11.5.

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PSCell in slot (m+k).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where $T_{activation_time}$ =

- T_{first_TRS} + T_{TRS} + 5 ms, if aperiodic CSI-RS resources are not configured for SCell activation or UE do not support *aperiodicCSI-RS-FastScellActivation-r17*, when the EPRE difference(Δ_{EPRE}) is equal to 12 dB
- T_{first_TRS} + 2*T_{TRS} +5 ms, when the EPRE difference(Δ_{EPRE}) is equal to [30] dB

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1 + \frac{T_{HARQ}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{EUTRA slot length}} + N_{interruption}$.

The interruption of PSCell shall not be more than the values specified for EN-DC in Clause 8.3.2 in 38.133 [6].

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

4.5.3.12 EN-DC FR1 Inter-band SSB-less SCell activation using A-TRS

4.5.3.12.1 Test purpose

The purpose of this test is to verify that User Equipment's (UE) support for SCell activation and measure the associated activation delay. The test will assess whether the activation times meet the specified requirements when a collocated active reference serving cell on a different FR1 band is present. This test will validate the requirements outlined in TS 38.133 [6] clause 8.3.2.

4.5.3.12.2 Test applicability

This test applies to all types of NR UE releases 18 onwards that support scellWithoutSSB-InterBandCA-r18.

4.5.3.12.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause4.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.2.

4.5.3.12.4 Test description

4.5.3.12.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for LTE PCell, NR PSCell and NR SCell are shown in Table 4.5.3.12.4.1-1.

Table 4.5.3.12.4.1-1: Inter-band SSB less SCell activation in FR1 supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 4.5.3.12.4.1-2 and Table 4.5.3.12.4.1-3.

Table 4.5.3.12.4.1-2: Initial conditions for FR1 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.3.5.5-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.1	

Table 4.5.3.12.4.1-3: General test parameters for Inter-band SSB less SCell activation in FR1

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.1
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
Cell 3 timing offset to Cell 2	µs	Length of CP of Cell 3	
Time alignment error between Cell 3 and Cell 2	µs	≤ 3	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured.

T2	s	1	During this time the UE shall activate the SCell.
T_{HARQ}	ms	k_1 NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

1. Message contents are defined in clause 4.5.3.12.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells. Cell 2 is the PSCell and Cell 3 is the unknown activated SCell.

4.5.3.12.4.2 Test procedure

The test consists of two successive time periods, with duration of T1 and T2, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes added. The configuration for the SCell (Cell 3) is not provided with SSB configuration (*absoluteFrequencySSB*) in the SCell *FrequencyInfoDL* nor SMTC configuration for the SCell and PSCell (Cell 2) is indicated as reference cell by higherlayer parameter *referenceCell-r18*. Cell 3 is configured with TRS as shown in table 4.5.3.12.5-1. The RS(s) of the Cell 3 is QCL-TypeA with TRS(s) of the Cell 3, and the TRS(s) of the Cell 3 is QCL-TypeC with SSB(s) of Cell 2.

The test equipment sends a MAC message for activation of the SCell and triggering the aperiodic CSI-RS for fast SCell activation. The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot m + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in TS 38.133 [6] clause 8.3. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in TS 38.133 [6] clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in TS 38.133 [6] clause 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [23] clause 7.32.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation of SCell. The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 4.5.3.12.5-1 and A.6.1.1-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 4.5.3.12.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.55) in a slot # denoted m and T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 7.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot $s_{first_CSI} = \mathrm{m} + 1 + \frac{\mathrm{T_{HARQ}} + 3\mathrm{ms} + T_{CSI_Reporting}}{NR\,slot\,length}$,

   - or slot $s^{int}_{first_CSI} = m + 1 + \frac{T_{HARQ} + 3ms + T_{CSI_Reporting} + T_X}{NR\,slot\,length} + N_{interruption} + 1$ if the slot s_{first_CSI} was subject to interruption,

   - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI} = \mathrm{m} + \frac{T_{\mathrm{HARQ}} + T_{\mathrm{activation_time}} + T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$, where $\mathrm{T_{activation_time}}$ = = $\mathrm{T_{first_ATRS}} + \mathrm{T_{gap}} + \mathrm{T_{ATRS}} + 5$ ms, as defined in TS 38.133 [6] clause8.3.2,

   - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

   - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if $s_{nonzero_CQI}$ was subject to interruption,

   - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $m + 1 + \frac{T_{HARQ} + \mathrm{TRRC_process} + T_1 + T_X}{NR\,slot\,length} + N_{interruption} + \frac{T_{HARQ}}{NR\,slot\,length}$ up to the end of T2

   - Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 6, the SS shall transmit an *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508[25] Table 4.6.1-8 to release NR PSCell. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit an *RRCConnectionReconfiguration* message with condition MCG and SCG according to TS 36.508 [25] Table 4.6.1-8 to ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. The UE shall transmit an RRCConnectionReconfigurationComplete message.

The event "Activation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

4.5.3.12.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 4.5.3.12.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell

Table 4.5.3.12.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell	Table 4.5.3.12.4.3-5	
}			
}			
}			

Table 4.5.3.12.4.3-5: CellGroupConfig-SCell (Table 4.5.3.12.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 4.5.3.12.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 4.5.3.12.4.3-7	
}			
}			
}			

Table 4.5.3.12.4.3-6: ServingCellConfig-SpCell (Table 4.5.3.12.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6 with condition FastActivation_SCell		
servingCellMO	2		

Table 4.5.3.12.4.3-7: ServingCellConfig-SCell (Table 4.5.3.12.4.3-5)

4.5.3.12.5 Test requirement

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot (m+k).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{first_ATRS} + T_{gap} + T_{ATRS} + 5$ ms, as defined in TS 38.133 [6] clause 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3\text{ms}+T_X}{\text{NR slot length}} + N_{\text{interruption}}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1 + \frac{T_{HARQ}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{HARQ}+3\text{ms}+T_X}{\text{EUTRA slot length}} + N_{\text{interruption}}$, as defined in TS 38.133 [6] clause 8.3. The interruption of PSCell shall not be more than the values specified for EN-DC in TS 38.133 [6] Clause 8.2.1.2.19.

All the above test requirements shall be fulfilled for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in TS 38.133 [6] clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

Table 4.5.3.12.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.5.3.12.5-1: Cell specific test parameters for Inter-band SSB less SCell activation in FR1

Parameter		**Unit**	**Cell 2**		**Cell 3**	
			T1	**T2**	**T1**	**T2**
SSB ARFCN			**freq1**		**Not applicable**	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
Reference Channel			N/A		Cell 2	
$BW_{channel}$	Config 1,4	MHz	Note 7			
	Config 2,5		Note 7			
	Config 3,6		Note 7			
$BW_{occupied}$	Config 1,4	RB	52 Note 5			
	Config 2,5		52 Note 5			
	Config 3,6		106 Note 6			
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1			

DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TCI state			TCI.State.0	TCI.State.0 Note 8
Aperiodic CSI-RS for SCell activation	Config 1,4		N/A	TRS.1.3 FDD
	Config 2,5		N/A	TRS.1.3 TDD
	Config 3,6		N/A	TRS.1.4 TDD
gapBetweenBursts		Slot	N/A	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 FDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 FDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 Note 5	
	Config 3,6		OP.1 Note 6	
SMTC configuration			SMTC.1	Not Applicable
SSB configuration	Config 1,2,4,5		SSB.1 FR1	Not Applicable
	Config 3,6		SSB.2 FR1	Not Applicable
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2,5		CSI-RS.1.1 TDD	
	Config 3,6		CSI-RS.2.1 TDD	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15	
	Config 3,6		30	
reportConfigType	Config 1-6		periodic	
reportQuantity	Config 1-6		cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5	slot	5	N/A
CSI reporting offset	Config 3,6	slot	10	N/A
	Config 1,2,4,5		2	N/A
	Config 3,6		4	N/A
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104	
	Config 3,6		-101	
$\hat{E}_s / I_{ot}$		dB	10	18
$\hat{E}_s / N_{oc}$		dB	10	18
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87	NA
	Config 3,6		-84	NA
SCH_RP Note 3		dBm/15 kHz	-87	Note 3
Propagation condition		-	AWGN	
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	-58.96	Note 3

	Config 3,6	dBm/ 38.16MHz	-52.87	Note 3

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8: The SSB in referenceSignal in the TCI state is configured as the SSB in Cell 1.

4.5.4 UE UL carrier RRC reconfiguration delay

4.5.4.1 EN-DC FR1 UE UL carrier RRC reconfiguration delay

4.5.4.1.1 Test purpose

This test is to verify that when the UE receives a RRC message implying NR UL or Supplementary UL (SUL) carrier configuration, the UE is ready to start transmission on the newly configured carrier within the time limits specified for configuring and deconfiguring carrier. This test will verify the UE being configured or deconfigured with a SUL carrier or NR UL carrier RRC reconfiguration delay requirements in TS 38.133 clause 8.4.

4.5.4.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards. This test is applicable to UE that supports SUL.

4.5.4.1.3 Minimum conformance requirements

When the UE receives a RRC message implying NR UL or supplementary UL (SUL) carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within $T_{UL_carrier_config}$ from the end of the slot n.

Where

- Slot n is the last slot overlapping with the PDSCH containing the RRC command.
- $T_{UL_carrier_deconfig}$ equals the maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it equals the maximum RRC procedure delay defined in clause 12 in TS 38.331 [2].

When the UE receives a RRC message implying NR UL or supplementary UL (SUL) carrier deconfiguration RRC signalling, the UE shall stop UL signalling on the deconfigured UL carrier within $T_{UL_carrier_config}$ from the end of slot n.

Where

- Slot n is the last slot overlapping with the PDSCH containing the RRC command.
- $T_{UL_carrier_deconfig}$ equals the maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it equals the maximum RRC procedure delay defined in clause 12 in TS 38.331 [2].

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.4.1.

4.5.4.1.4 Test description

4.5.4.1.4.1 Initial conditions

This test can be run in one of the configurations defined in Table 4.5.4.1.4.1-1.

Table 4.5.4.1.4.1-1: Supported test configurations for FR1 PSCell (Cell2) and SCell (Cell3)

Configuration	PSCell (Cell2)	SCell (Cell3)
4.5.4.1-1	15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
4.5.4.1-2	15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
4.5.4.1-3	15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40 MHz bandwidth, SUL duplex mode
4.5.4.1-4	15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
4.5.4.1-5	15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
4.5.4.1-6	15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40 MHz bandwidth, SUL duplex mode
4.5.4.1-7	30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
4.5.4.1-8	30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥10 MHz bandwidth, SUL duplex mode
4.5.4.1-9	30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40 MHz bandwidth, SUL duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.		

Configure the test equipment and the DUT according to the parameters in Table 4.5.4.1.4.1-2.

Table 4.5.4.1.4.1-2: Initial conditions for EN-DC FR1 UE UL carrier RRC reconfiguration delay

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.5.4.1.4.3.
2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR1 PSCell. Cell 3 is NR FR1 SCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2
3. The test parameters are given in Table 4.5.4.1.4.1-3 below.
4. Downlink signals for NR cell are initially set up according to clauses C.1.2 and C.1.3.

Table 4.5.4.1.4.1-3: General test parameters for EN-DC FR1 UE UL carrier RRC reconfiguration delay

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1, 2, 3, 4, 5, 6, 7, 8, 9	1, 2, 3	Three radio channels are used for this test.
Active cell		Config 1, 2, 3, 4, 5, 6, 7, 8, 9	Cell 1: E-UTRAN PCell Cell 2: FR1 PSCell Cell 3: FR1 SCell	E-UTRAN PCell on RF channel number 1 FR1 PSCell on RF channel number 2 FR1 SCell on RF channel number 3
CP length		Config 1,2, 3, 4, 5, 6, 7, 8, 9	Normal	
DRX		Config 1,2, 3, 4, 5, 6, 7, 8, 9	OFF	
Measurement gap pattern Id		Config 1,2, 3, 4, 5, 6, 7, 8, 9	OFF	
Filter coefficient		Config 1,2, 3, 4, 5, 6, 7, 8, 9	0	L3 filtering is not used
T1	s	Config 1,2, 3, 4, 5, 6, 7, 8, 9	5	
T2	s	Config 1,2, 3, 4, 5, 6, 7, 8, 9	5	
T3	s	Config 1,2, 3, 4, 5, 6, 7, 8, 9	5	

4.5.4.1.4.2 Test procedure

There are three cells: E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and FR1 SCell (Cell 3). For SCell, both NR uplink and supplementary uplink are broadcast by *ServingCellConfigCommonSIB*.

The test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, NR uplink of Cell 2 is configured to UE. At the start of T2, a supplementary uplink cell (Cell 3) is configured to UE through *RRCReconfiguration*, then UE shall start transmission on the supplementary uplink. At the start of T3, the supplementary uplink is released through *RRCReconfiguration*.

At the start of the test the UE is in RRC_CONNECTED state with Cell 1 (NR uplink cell). The SS shall provide continuous UL grants to the UE, so it can transmit in the corresponding uplink carrier as soon as it is ready for transmission.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Setup E-UTRAN PCell (Cell 1) according to parameters given in Table A.6.1.1-1 and setup FR1 PSCell (Cell 2) according to parameters given in Table 4.5.4.1.5-1.
3. Both Cell 2 NR uplink and SUL Cell 3 supplementary uplink are broadcast by *ServingCellConfigCommonSIB* of Cell 2.
4. During time duration T1, NR uplink (Cell 2) is configured on the UE. Setup Cell 2 according to parameters given in Table 4.5.4.1.5-1.
5. At the start of T2, the supplementary uplink Cell (Cell 3) is configured to UE through *RRCConnectionReconfiguration*, then UE shall start transmission on the supplementary uplink Cell (Cell 3) within 20ms. If UE transmits data on the supplementary uplink Cell (Cell 3) within 20ms from the start of T2,

then count a success for the event "reconfiguration" otherwise count a failure for event "reconfiguration" and proceed with step 7.

6. At the start of T3, the supplementary uplink is released through *RRCConnectionReconfiguration*, then UE shall transmit data only on the NR uplink carrier of SCell within 20ms. If UE stops transmitting data on supplementary uplink carrier on SCell (Cell 3) within 20ms from the start of T3, then count a success for the event "deconfiguration" otherwise count a failure for event "deconfiguration".

7. Repeat steps 1-6 until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

4.5.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 4.5.4.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.8-1 Table H.3.8-2 Table 4.6.3-128 in 38.508-1 [14] with condition SUL Table 4.6.3-167 in 38.508-1 [14] with condition PUSCH_PUCCH_ON_SUL Table 4.6.3-169 in 38.508-1 [14] with condition SUL Table 4.6.3-202 in 38.508-1 [14] with condition SUL_SUL

4.5.4.1.5 Test requirements

Table 4.5.4.1.5-1 and 4.5.4.1.5-2 defines the primary level settings including test tolerances for the EN-DC FR1 UE UL carrier RRC reconfiguration delay test with all NR cells in FR1.

Table 4.5.4.1.5-1: NR Cell specific test parameters for EN-DC FR1 UE UL carrier RRC reconfiguration delay on PSCell (Cell 2)

Parameter	Unit	Test Configuration	Test 1		
			T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	2		
TDD configuration		Conf 1, 2, 3	N/A		
		Conf 4, 5, 6	TDD Conf.1.1		
		Conf 7, 8, 9	TDD Conf.2.1		
$BW_{channel}$	MHz	Conf 1, 2, 3	Note 6		
		Conf 4, 5, 6	Note 6		
		Conf 7, 8, 9	Note 6		
$BW_{occupied}$	RB	Conf 1, 2, 3	52 Note 4		
		Conf 4, 5, 6	52 Note 4		
		Conf 7, 8, 9	106 Note 5		
PDSCH reference measurement channel as defined in A.3.1.1		Conf 1, 2, 3	SR.1.1 FDD		
		Conf 4, 5, 6	SR.1.1 TDD		
		Conf 7, 8, 9	SR 2.1 TDD		
RMSI CORESET reference measurement channel as defined in A.3.1.2		Conf 1, 2, 3	CR.1.1 FDD		
		Conf 4, 5, 6	CR.1.1 TDD		
		Conf 7, 8, 9	CR.2.1 TDD		
RMC CORESET reference measurement channel as defined in A.3.1.3		Conf 1, 2, 3	CCR.1.1 FDD		
		Conf 4, 5, 6	CCR.1.1 TDD		
		Conf 7, 8, 9	CCR.2.1 TDD		
OCNG Pattern Note 1		Conf 1, 2, 3, 4, 5, 6	OP.1 Note 4		
		Config 7, 8, 9	OP.1 Note 5		

SSB configuration		Conf 1, 2, 3, 4, 5, 6	SSB.1 FR1		
		Conf 7, 8, 9	SSB.2 FR1		
SMTC configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTC.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD		
		Conf 2	TRS.1.1 FDD		
		Conf 3	TRS.1.1 FDD		
		Conf 4	TRS.1.1 TDD		
		Conf 5	TRS.1.1 TDD		
		Conf 6	TRS.1.1 TDD		
		Conf 7	TRS.1.2 TDD		
		Conf 8	TRS.1.2 TDD		
		Conf 9	TRS.1.2 TDD		
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1		
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1		
UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1		
EPRE ratio of PSS to SSS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0		
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} Note 2	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102		
	dBm/ SCS	Conf 1,2,3,4,5,6	-102		
		Conf 7,8,9	-99		
$\hat{E}_s / N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
$\hat{E}_s / I_{ot}$ Note 3	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16+TT	16
SS-RSRP Note 3	dBm/ SCS	Conf 1,2,3,4,5,6	-86	-86+TT	-86
		Conf 7,8,9	-83	-83+TT	-83
Io Note 3	dBm/ 9.36 MHz	Conf 1,2,3,4,5,6	-57.9	-57.9+TT	-57.9
	dBm/ 38.16 MHz	Conf 7,8,9	-51.8	-51.8	-51.8
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN		
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2		

NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
NOTE 3: $\hat{E}_s/I_{ot}$, Io, and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 6: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table 4.5.4.1.5-2: NR Cell specific test parameters for EN-DC FR1 UE UL carrier RRC reconfiguration delay on SUL Cell (Cell 3)

Parameter	Unit	Test Configuration	Test 1		
			T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	3		
TDD configuration		Conf 1, 4, 7	N/A		
		Conf 2, 5, 8	TDDConf.1.1		
		Conf 3, 6, 9	TDDConf.2.1		
$BW_{channel}$	MHz	Conf 1, 4, 7	Note 6		
		Conf 2, 5, 8	Note 6		
		Conf 3, 6, 9	Note 6		
$BW_{occupied}$	RB	Conf 1, 4, 7	52 Note 4		
		Conf 2, 5, 8	52 Note 4		
		Conf 3, 6, 9	106 Note 5		
PUSCH parameters for NR UL carrier		Conf 1, 4, 7	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]
		Conf 2, 5, 8	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]
		Conf 3, 6, 9	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]
PUCCH parameters For NR UL carrier		Conf 1, 4, 7	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]
		Conf 2, 5, 8	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]
		Conf 3, 6, 9	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]
PUSCH parameters for supplementary UL		Conf 1, 4, 7	N/A	G-FR1-A3-10 in [13]	N/A
		Conf 2, 5, 8	N/A	G-FR1-A3-10 in [13]	N/A
		Conf 3, 6, 9	N/A	G-FR1-A3-14 in [13]	N/A
PUCCH parameters for supplementary UL		Conf 1, 4, 7	N/A	N/A	N/A
		Conf 2, 5, 8	N/A	N/A	N/A
		Conf 3, 6, 9	N/A	N/A	N/A
PDSCH reference measurement channel as defined in A.1.1		Conf 1, 4, 7	SR.1.1 FDD		
		Conf 2, 5, 8	SR.1.1 TDD		
		Conf 3, 6, 9	SR 2.1 TDD		
RMSI CORESET reference		Conf 1, 4, 7	CR.1.1 FDD		
		Conf 2, 5, 8	CR.1.1 TDD		

measurement channel as defined in A.1.2		Conf 3, 6, 9	CR.2.1 TDD		
RMC CORESET reference measurement channel as defined in A.1.3		Conf 1, 4, 7	CCR.1.1 FDD		
		Conf 2, 5, 8	CCR.1.1 TDD		
		Conf 3, 6, 9	CCR.2.1 TDD		
OCNG Pattern Note 1		Conf 1, 2, 4, 5, 7, 8	OP.1 Note 4		
		Conf 3, 6, 9	OP.1 Note 5		
SSB configuration		Conf 1, 2, 4, 5, 7,8	SSB.1 FR1		
		Conf 3, 6, 9	SSB.2 FR1		
SMTC configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTC.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD		
		Conf 2	TRS.1.1 TDD		
		Conf 3	TRS.1.2 TDD		
		Conf 4	TRS.1.1 FDD		
		Conf 5	TRS.1.1 TDD		
		Conf 6	TRS.1.2 TDD		
		Conf 7	TRS.1.1 FDD		
		Conf 8	TRS.1.1 TDD		
		Conf 9	TRS.1.2 TDD		
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1		
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1		
UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1		
EPRE ratio of PSS to SSS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0		
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} Note 2	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102		
	dBm/ SCS	Conf 1, 2, 4, 5, 7,8	-102		
		Conf 3, 6, 9	-99		
$\hat{E}_s / N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
$\hat{E}_s / I_{ot}$ Note 3	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
SS-RSRP Note 3	dBm/ SCS	Conf 1, 2, 4, 5, 7,8	-86	-86	-86

		Conf 3, 6, 9	-83	-83	-83
Io Note 3	dBm/ 9.36 MHz	Conf 1, 2, 4, 5, 7,8	-57.9	-57.9	-57.9
	dBm/ 38.16 MHz	Conf 3, 6, 9	-51.8	-51.8	-51.8
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN		
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2		
SUL RSRP threshold (*rsrp-ThresholdSSB-SUL*)	dBm	Conf 1,2,3,4,5,6	-75		
		Conf 7,8,9	-72		

NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
NOTE 3: $\hat{E}_s/I_{ot}$, Io, and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 6: $N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

The UE shall be ready to start transmission on the supplementary uplink carrier on SCell within 20ms from the start of T2.

The UE shall stop the transmission on the supplementary uplink carrier on SCell within 20ms from the start of T3.

All of the above test requirements shall be fulfilled in order for the observed UE UL carrier configuration delay and UE UL carrier release delay to be counted as correct. The rate of correct observed UE UL carrier configuration delay and UE UL carrier release delay during repeated tests shall be at least 90 %.

4.5.5 Link recovery procedures

4.5.5.0 Minimum conformance requirements

4.5.5.0.1 Minimum conformance requirements for SSB-based beam failure detection

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_SSB}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB}$ ms period.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 4.5.5.0.1-1 for FR1.

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB.
- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 4.5.5.0.1-1: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	Max(50, Ceil(5 × P) × T_{SSB})
DRX cycle ≤ 320ms	Max(50, Ceil(7.5 × P) × Max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	Ceil(5 × P) × T_{DRX}
NOTE: T_{SSB} is the periodicity of SSB in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement:

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS:
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

The normative reference for this requirement is TS 38.133 [6] clauses 8.5.2.2 and 8.5.2.3.

4.5.5.0.2 Minimum conformance requirements for CSI-RS-based beam failure detection

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_CSI-RS}$ ms period becomes worse than the threshold $Q_{out_LR_CSI-RS}$ within $T_{Evaluate_BFD_CSI-RS}$ ms period.

The value of $T_{Evaluate_BFD_CSI-RS}$ is defined in Table 4.5.5.0.2-1 for FR1.

For FR1:

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS.
- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{BFD} used in Table 4.5.5.0.2-1 is defined as:

- M_{BFD} = 10, if the CSI-RS resource(s) in set $\overline{q}_0$ used for BFD is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{BFD} used in Table 4.5.5.0.2-1 is defined as:

For each CSI-RS resource in the set $\overline{q}_0$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{BFD} = 1,

For each CSI-RS resource in the set $\overline{q}_0$ configured for PSCell in NR-DC

P_{BFD} = 2 if UE is configured for beam failure detection on SCell, 1 otherwise.

For each CSI-RS resource in the set $\overline{q}_0$ configured for a SCell

- P_{BFD} = Z in EN-DC or NE-DC or SA.
- P_{BFD} = 2* Z in NR-DC.

  Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell

Table 4.5.5.0.2-1: Evaluation period $T_{Evaluate_BFD_CSI\text{-}RS}$ for FR1

Configuration	$T_{Evaluate_BFD_CSI\text{-}RS}$ (ms)
no DRX	Max(50, Ceil（$M_{BFD} \times P \times P_{BFD}$) × $T_{CSI\text{-}RS}$)
DRX cycle ≤ 320ms	Max(50, Ceil (1.5 × $M_{BFD} \times P \times P_{BFD}$) × Max($T_{DRX}$, $T_{CSI\text{-}RS}$))
DRX cycle > 320ms	Ceil ($M_{BFD} \times P \times P_{BFD}$) × T_{DRX}
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For both FR1 and FR2, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clauses 8.5.3.2 and 8.5.3.3.

4.5.5.0.3 Scheduling availability of UE during beam failure detection and candidate beam detection

[TS 38.133, clause 8.5.7.1]

There are no scheduling restrictions due to beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

[TS 38.133, clause 8.5.8.1]

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

The normative reference for this requirement is TS 38.133 [6] clauses 8.5.7.1 and 8.5.8.1.

4.5.5.0.4 Requirements for Beam Failure Recovery in SCell

For the UE not provided with a configuration of PUCCH transmission with a link recovery request (LRR) as described in clause 9.2.4 in TS 38.213 [3], if beam recovery procedure is triggered for any of SCells, the UE shall transmit preamble for UL-SCH resource application, followed by MAC CE providing one index for at least one corresponding SCell with radio link quality is worse than $Q_{out,LR}$, and the index q_{new} for a periodic CSI-RS configuration or for a SSB provided by higher layer, as described in clause 5.17 of TS38.321 [7], if any, for a corresponding SCell.

The normative reference for this requirement is TS 38.133 [6] clauses 8.5.9.

4.5.5.0.5 TRP specific Minimum conformance requirements

[TS 38.133, clause 8.18.3]

4.5.5.0.5.1 Requirements for TRP specific SSB based beam failure detection

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ estimated over the last $T_{Evaluate_BFD_SSB}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB}$ ms period.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 4.5.5.0.5.1-1 for FR1.

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB.
- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 4.5.5.0.5.1-1: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	$Max(50, Ceil(5 \times P) \times T_{SSB})$
DRX cycle ≤ 320ms	$Max(50, Ceil(7.5 \times P) \times Max(T_{DRX}, T_{SSB}))$
DRX cycle > 320ms	$Ceil(5 \times P) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

4.5.5.0.5.2 Requirements for TRP specific SSB based candidate beam detection

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$,estimated over the last $T_{Evaluate_CBD_SSB}$ ms period becomes better than the threshold Q_{in_LR} provided SSB_RP and SSB Ês/Iot are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in Table 4.5.5.0.5.2-1 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_SSB}$ is defined in Table 4.5.5.0.5.2-1 for FR1.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of P_{CBD} used in Table 4.5.5.0.5.2-1 is defined as

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{CBD} = 1.

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PSCell in NR-DC

- P_{CBD} = 2 if UE is configured for candidate beam detection on SCell, 1 otherwise.

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for a SCell

- P_{CBD} = Z in EN-DC or NE-DC or SA.
- P_{CBD} = 2* Z in NR-DC.

  Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell
- P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

Table 4.5.5.0.5.2-1: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR1

Configuration	$T_{Evaluate_CBD_SSB}$ (ms)
non-DRX, DRX cycle ≤ 320ms	Max(25, Ceil($3 \times P \times P_{CBD}$) × T_{SSB})
DRX cycle > 320ms	Ceil($3 \times P \times P_{CBD}$) × T_{DRX}
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

4.5.5.0.5.3 Requirements for TRP specific Beam Failure Recovery

Provided that UE is configured by *schedulingRequestID-BFR-r17* and/or *schedulingRequestID-BFR2-r17*for BFR set 1 (i.e., TRP1) and BFR set 2 (i.e., TRP2) respectively, a configuration for LRR in a PUCCH transmission, after BFR is triggered on any of the TRPs as described in clause 5.17 of TS38.321 [7], UE shall be capable of transmit PUCCH with a LRR within a period of T on any of the TRPs where BFR running.Where:

- $T = T_1 \times Ceil((T_2+D)/T_1)$ in which T_1, T_2 and D are defined as
  - T_1 is equal to the periodicity of PUCCH configured with *schedulingRequestID-BFR-r17 for* BFR set 1 schedulingRequestID-BFR2-r17 for BFR set 2..
  - $T_2 = T_{Evaluate_CBD}$ is the evaluation period specified in clause 4.5.5.0.5.2 for SSB based candidate beam detection, that is $T_{Evaluate_CBD_SSB}$ or $T_{Evaluate_CBD_CSI-RS}$, depending on the applicable reference signal configured for candidate beam detection.
  - D = [2ms] is the UE Processing time.

4.5.5.0.5.4 Scheduling availability of FR1 UE during TRP specific beam failure detection

There are no scheduling restrictions due to TRP specific beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

4.5.5.0.5.4.1 Scheduling availability of UE performing TRP specific beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to TRP specific beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

4.5.5.0.5.4.2 Scheduling availability of UE performing TRP specific beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to TRP specific beam failure detection when SSB is configured as BFD. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to TRP specific beam failure detection when SSB is configured as BFD.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for TRP specific beam failure detection.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on FR1 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which PCell or PSCell is configured.

4.5.5.0.5.5 Scheduling availability of FR1 UE during TRP specific candidate beam detection

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for TRP specific candidate beam detection are described in the following clauses.

4.5.5.0.5.5.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as TRP specific link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

4.5.5.0.5.5.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as TRP specific link recovery detection resource. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured as TRP specific link recovery detection resource.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, TRS, CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for L1-RSRP.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on one serving cell apply to all other serving cells in the same band on the symbols that fully or partially overlap with the restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands.

4.5.5.1 EN-DC FR1 SSB-based beam failure detection and link recovery in non-DRX

4.5.5.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

4.5.5.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC and link recovery.

4.5.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.5.1.

4.5.5.1.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 4.5.5.1.4-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure 4.5.5.1.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

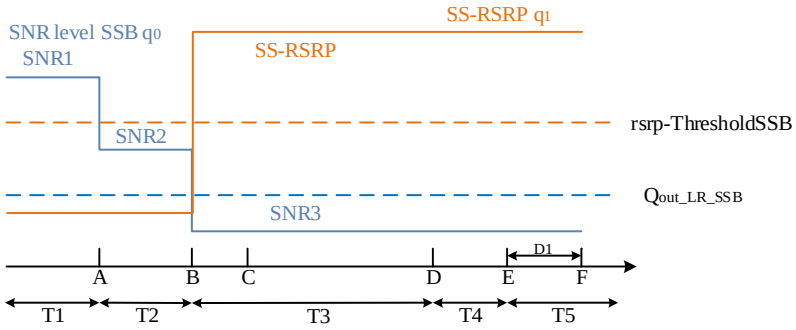

Figure 4.5.5.1.4-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

4.5.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.5.1.4.1-1.

Table 4.5.5.1.4.1-1: Supported test configurations for EN-DC FR1 SSB-based beam failure detection and link recovery in non-DRX

Configuration	Description
4.5.5.1-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.1-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.1-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4.5.5.1-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.1-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.1-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.5.1.4.1-2.

Table 4.5.5.1.4.1-2: Initial conditions for EN-DC FR1 SSB-based beam failure detection and link recovery in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 4.5.5.1.4.1-3.

2. Message contents are defined in clause 4.5.5.1.4.3.

3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test

Table 4.5.5.1.4.1-3: General test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
#Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD	
	Config 2, 5		CCR.1.1 TDD	
	Config 3, 6		CCR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.3 FR1	
	Config 2, 5		SSB.3 FR1	
	Config 3, 6		SSB.4 FR1	
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1	
	Config 3, 6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz	
	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		PRACH.2 FR1	CFRA for BFR
	Config 3, 6		PRACH.2 FR1	CFRA for BFR
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	

Parameter		Unit	Value	Comment
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6	dBm/SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 timer		ms	1000	
N310			2	
T1		s	0.2	During this time the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.14	
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 3: E-UTRAN is in non-DRX mode under test.				

4.5.5.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms).

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. The SS sends an *RRCReconfiguration* (embeded in *RRCConnectionReconfiguration* message) message to the UE to configure inter-frequency measurement.
3. The UE sends an RRCReconfigurationComplete (embeded in RRCConnectionReconfigurationComplete message) message.
4. Set the parameters of NR Cell according to T1 in Table 4.5.5.1.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.5.1.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.5.1.5-1. T3 starts.
7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 4.5.5.1.5-1. T4 starts.
8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 4.5.5.1.5-1. T5 starts.
9. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B; and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the star of T5),the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

10. If the iteration or random access procedure for BFD fails, the SS shall first attempt to release and add the PSCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.
11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with condition “Short_DCI” with the following exceptions:

Table 4.5.5.1.4.3-1: Common Exception messages for EN-DC FR1 SSB-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier center of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.1-10B Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition BFD Table H.3.5-4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.5.5.1.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 4.5.5.1.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 4.5.5.1.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	

}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 4.5.5.1.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

Table 4.5.5.1.4.3-6: PDCCH *Search Space* for USS

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	2		
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n1		
aggregationLevel4	n1		
aggregationLevel8	n0		
}			
}			

4.5.5.1.5 Test requirements

Tables 4.5.5.1.4.1-3 and 4.5.5.1.5-1 define the primary level settings including test tolerances for EN-DC FR1 SSB-based beam failure detection and link recovery in non-DRX.

Table 4.5.5.1.5-1: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1, 4	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2, 5		5.8	-2.2	-12.8	-12.8	-12.8
	Config 3, 6		5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q1	Config 1, 4	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 2, 5		-10.2	-10.2	10.2	10.2	10.2
	Config 3, 6		-10.2	-10.2	10.2	10.2	10.2

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
SSB_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 2, 5		-108.2	-108.2	−87.8	−87.8	−87.8
	Config 3, 6		-105.2	-105.2	−84.8	−84.8	−84.8
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 4.5.5.1.4-1.
NOTE 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 from D.4.1.1, is -15dB-TT = -15.8dB (including test tolerances).

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 140 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

4.5.5.2 EN-DC FR1 SSB-based beam failure detection and link recovery in DRX

4.5.5.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

4.5.5.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR1, link recovery and long DRX cycle.

4.5.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.5.2.

4.5.5.2.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively.
Figure 4.5.5.2.4-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure 4.5.5.2.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

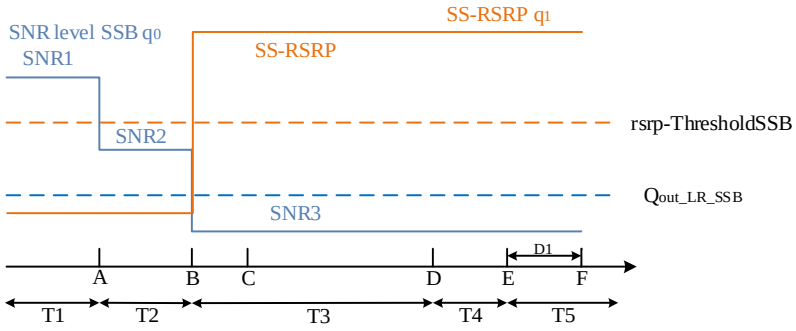

Figure 4.5.5.2.4-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in DRX mode

4.5.5.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.5.2.4.1-1.

Table 4.5.5.2.4.1-1: Supported test configurations for SSB-based beam failure detection and link recovery testing in DRX mode

Configuration	Description
4.5.5.2-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.2-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.2-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4.5.5.2-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.2-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.2-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.5.2.4.1-2.

Table 4.5.5.2.4.1-2: Initial conditions for EN-DC FR1 SSB-based beam failure detection and link recovery in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.5.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 4.5.5.2.4.1-3.
2. Message contents are defined in clause 4.5.5.2.4.3.

3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test

Table 4.5.5.2.4.1-3: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR. 1.1 FDD	
	Config 2, 5		CR. 1.1 TDD	
	Config 3, 6		CR. 2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD	
	Config 2, 5		CCR.1.1 TDD	
	Config 3, 6		CCR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.3 FR1	
	Config 2, 5		SSB.3 FR1	
	Config 3, 6		SSB.4 FR1	
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1	
	Config 3, 6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz	
	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		PRACH.2 FR1	CFRA for BFR
	Config 3, 6		PRACH.2 FR1	CFRA for BFR
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of	dB	0	

Parameter		Unit	Value	Comment
			Test 1	
	hypothetical PDCCH RE energy to average CSI-RS RE energy			
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6	dBm/SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	3.24	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 3: E-UTRAN is in non-DRX mode under test.				

4.5.5.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell 1 according to T1 in Table 4.5.5.2.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.5.2.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.5.2.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 4.5.5.2.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 4.5.5.2.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B; and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5), the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. If the iteration or random access procedure for BFD fails, the SS shall first attempt to release and add the PSCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.5.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with condition “Short_DCI” with the following exceptions:

Table 4.5.5.2.4.3-1: Common Exception messages for EN-DC FR1 SSB-based beam failure detection and link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.1-10B Table H.3.5-4 Table H.3.7-1 with Condition DRX.7 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.5.5.2.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**

SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 4.5.5.2.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 4.5.5.2.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 4.5.5.2.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		

shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

Table 4.5.5.2.4.3-6: PDCCH *Search Space* for USS

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	2		
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n1		
aggregationLevel4	n1		
aggregationLevel8	n0		
}			
}			

4.5.5.2.5 Test requirements

Tables 4.5.5.2.4.1-3 and 4.5.5.2.5-1 define the primary level settings including test tolerances for EN-DC FR1 SSB-based beam failure detection and link recovery in DRX.

Table 4.5.5.2.5-1: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1, 4	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2, 5		5.8	-2.2	-12.8	-12.8	-12.8
	Config 3, 6		5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q1	Config 1, 4	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 2, 5		-10.2	-10.2	10.2	10.2	10.2
	Config 3, 6		-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 2, 5		-108.2	-108.2	−87.8	−87.8	−87.8
	Config 3, 6		-105.2	-105.2	−84.8	−84.8	−84.8
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
NOTE 4: Void						
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.						
NOTE 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 4.5.5.2.4-1.						
NOTE 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 from D.4.1.1, is -15dB-TT = -15.8dB (including test tolerances).						

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1940 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

4.5.5.3 EN-DC FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

4.5.5.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

4.5.5.3.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC, CSI-RS based RLM and link recovery.

4.5.5.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.5.3.

4.5.5.3.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively.
Figure 4.5.5.3.4-1 shows the variation of the downlink SNR of the PSCell and the SNR of the CSI-RS in set q_0 in the

active PSCell to emulate CSI-RS based beam failure. Figure 4.5.5.3.4-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

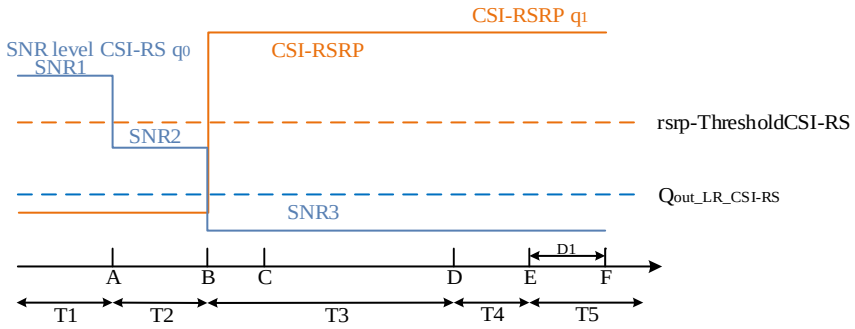

Figure 4.5.5.3.4-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

4.5.5.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.5.3.4.1-1.

Table 4.5.5.3.4.1-1: Supported test configurations for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

Configuration	Description
4.5.5.3-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.3-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.3-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4.5.5.3-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.3-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.3-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.5.3.4.1-2.

Table 4.5.5.3.4.1-2: Initial conditions for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.5.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 4.5.5.3.4.1-3.
2. Message contents are defined in clause 4.5.5.3.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test

Table 4.5.5.3.4.1-3: General test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD	
	Config 2, 5		CCR.1.1 TDD	
	Config 3, 6		CCR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.3 FR1	
	Config 2, 5		SSB.3 FR1	
	Config 3, 6		SSB.4 FR1	
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1	
	Config 3, 6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz	
	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		PRACH.4 FR1	
	Config 3, 6		PRACH.4 FR1	
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	

Parameter		Unit	Value	Comment
			Test 1	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6	dBm/SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for q_0 and q_1	Config 1, 4		CSI-RS.1.2 FDD	
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS	Config 1, 4		CSI-RS.1.2 FDD	
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.08	
D1		s	0.05	
NOTE: UE-specific PDCCH is not transmitted after T1 starts.				

4.5.5.3.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell according to T1 in Table 4.5.5.3.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.5.3.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.5.3.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 4.5.5.3.5-1. T4 starts.
6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 4.5.5.3.5-1. T5 starts.
7. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B, and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5), the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. If the iteration or random access procedure for BFD fails, the SS shall first attempt to release and add the PSCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.
9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.5.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions.

Table 4.5.5.3.4.3-1: Common Exception messages for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-10 with Condition CSI-RS Table H.3.1-10A Table H.3.1-10B Table H.3.5-4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.5.5.3.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			

}			
}			

Table 4.5.5.3.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 4.5.5.3.4.3-4: *NZP-CSI-RS-Resource*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-85			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
powerControlOffsetSS	db0		
}			

Table 4.5.5.3.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 4.5.5.3.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

4.5.5.3.5 Test requirements

Tables 4.5.5.3.4.1-3 and 4.5.5.3.5-1 define the primary level settings including test tolerances for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in non-DRX.

Table 4.5.5.3.5-1: Cell specific test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q0	Config 1, 4	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2, 5		5.8	-2.2	-12.8	-12.8	-12.8
	Config 3, 6		5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set q1	Config 1, 4	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 2, 5		-10.2	-10.2	10.2	10.2	10.2
	Config 3, 6		-10.2	-10.2	10.2	10.2	10.2
CSI-RS_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 2, 5		-108.2	-108.2	−87.8	−87.8	−87.8
	Config 3, 6		-105.2	-105.2	−84.8	−84.8	−84.8
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 4: Void.
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
NOTE 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 4.5.5.3.4-1.
NOTE 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 from D.4.1.1, is -15dB-TT = -15.8dB (including test tolerances).

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 50 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

4.5.5.4 EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX

4.5.5.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candicate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

4.5.5.4.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC FR1, CSI-RS based RLM, link recovery and long DRX cycle.

4.5.5.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.5.4.

4.5.5.4.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 4.5.5.4.4-1 shows the variation of the downlink SNR of the PSCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure 4.5.5.4.4-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

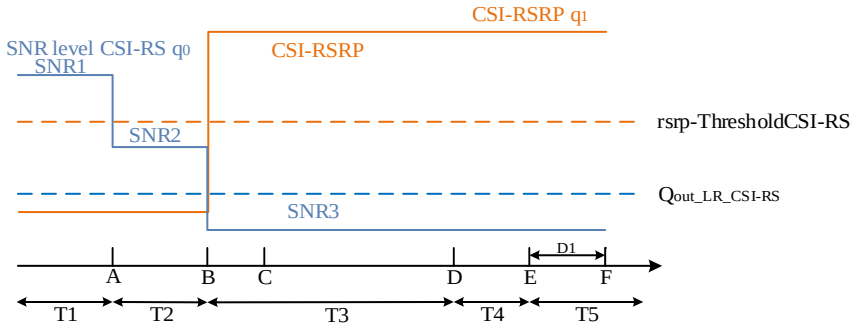

Figure 4.5.5.4.4-1: SNR and L1-RSRP variation for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX

4.5.5.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.5.4.4.1-1.

Table 4.5.5.4.4.1-1: Supported test configurations for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX

Configuration	Description
4.5.5.4-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.5.4-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.5.4-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.5.5.4-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.5.5.4-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.5.5.4-6	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 4.5.5.4.4.1-2.

Table 4.5.5.4.4.1-2: Initial conditions for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.5.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 4.5.5.4.4.1-3.
2. Message contents are defined in clause 4.5.5.4.4.3.
3. There are two cells in the test, where Cell 1 is the E-UTRAN PCell on the E-UTRA carrier, and Cell 2 is the NR PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1, Cell 2 is configured according to clauses C.1.2 and C.1.3.

Table 4.5.5.4.4.1-3: General test parameters for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD	
	Config 2, 5		CCR.1.1 TDD	
	Config 3, 6		CCR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.3 FR1	
	Config 2, 5		SSB.3 FR1	
	Config 3, 6		SSB.4 FR1	
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1	
	Config 3, 6		SMTC.1	
PDSCH/PDCCH subcarrier	Config 1, 2, 4, 5		15 KHz	

Parameter		Unit	Value	Comment
			Test 1	
spacing	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		PRACH.4 FR1	
	Config 3, 6		PRACH.4 FR1	
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6	dBm/SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for q_0 and q_1	Config 1, 4		CSI-RS.1.2 FDD	
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS	Config 1, 4		CSI-RS.1.2 FDD	

Parameter		Unit	Value	Comment
			Test 1	
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
NOTE: UE-specific PDCCH is not transmitted after T1 starts.				

Table 4.5.5.4.4.1-4: Void

Table 4.5.5.4.4.1-5: Void

Table 4.5.5.4.4.1-6: Void

4.5.5.4.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of FR1 PSCell according to T1 in Table 4.5.5.4.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 4.5.5.4.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 4.5.5.4.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 4.5.5.4.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 4.5.5.4.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B

   and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. If the iteration or random access procedure for BFD fails, the SS shall first attempt to release and add the PSCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.5.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.5.4.4.3-1: Common Exception messages for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-10 with Condition CSI-RS Table H.3.1-10A Table H.3.1-10B Table H.3.5-4 Table H.3.7-1 with Condition DRX.7 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.5.5.4.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 4.5.5.4.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 4.5.5.4.4.3-4: *NZP-CSI-RS-Resource*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-85			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
powerControlOffsetSS	db0		
}			

Table 4.5.5.4.4.3-5: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 4.5.5.4.4.3-6: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

4.5.5.4.5 Test requirement

Tables 4.5.5.4.4.1-3 and 4.5.5.4.5-1 define the primary level settings including test tolerances for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX.

Table 4.5.5.4.5-1: Cell specific test parameters for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					

EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q0	Config 1, 4	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2, 5		5.8	-2.2	-12.8	-12.8	-12.8
	Config 3, 6		5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set q1	Config 1, 4	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 2, 5		-10.2	-10.2	10.2	10.2	10.2
	Config 3, 6		-10.2	-10.2	10.2	10.2	10.2
CSI-RS_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 2, 5		-108.2	-108.2	−87.8	−87.8	−87.8
	Config 3, 6		-105.2	-105.2	−84.8	−84.8	−84.8
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 4.5.5.3.4-1.
Note 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 from D.4.1.1, is -15dB-TT = -15.8dB (including test tolerances).

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1940 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

4.5.5.5 EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX

4.5.5.5.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving SCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

4.5.5.5.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward supporting EN-DC FR1, CSI-RS based RLM, and SSB link recovery.

4.5.5.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.5.4.

4.5.5.5.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 4.5.5.5.4-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure 4.5.5.5.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

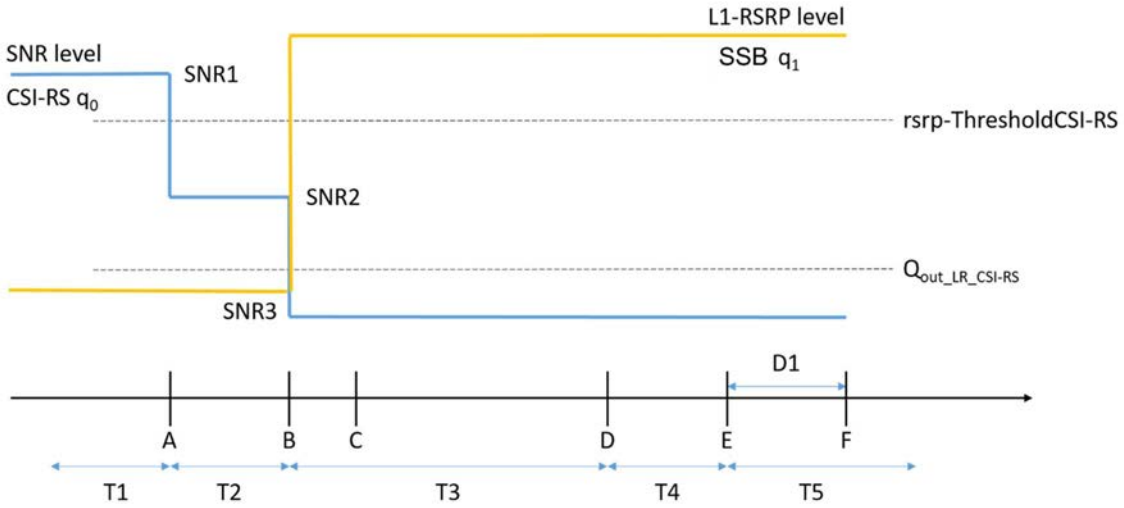

Figure 4.5.5.5.4-1: SNR and L1-RSRP variation for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX

4.5.5.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.5.4.4.1-1.

Table 4.5.5.5.4.1-1: Supported test configurations for EN-DC FR1 Scell CSI-RS-based beam failure detection and link recovery in DRX

Configuration	Description
4.5.5.5-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.5-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.5-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4.5.5.5-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.5-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.5-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 4.5.5.5.4.1-2.

Table 4.5.5.5.4.1-2: Initial conditions for EN-DC FR1 Scell CSI-RS-based beam failure detection and link recovery in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.5.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 4.5.5.5.4.1-3.

2. Message contents are defined in clause 4.5.5.5.4.3.

3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR cell (PSCell) and Cell 3 is the NR cell (SCell) with the power level set according to Annex C.1.2 and C.1.3 for this test

Table 4.5.5.5.4.1-3: General test parameters for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number for PSCell			2	
Active SCell			Cell 3	
RF Channel Number for SCell			3	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BW channel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A. 1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.1 FR1	A.3

	Config 2, 5		SSB.1 FR1	
	Config 3, 6		SSB.2 FR1	
SMTC Configuration	Config 1, 2, 3, 4, 5, 6		SMTC.1	A.4
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5	kHz	15	
	Config 3, 6		30	
PRACH Configuration	Config 1, 2, 4, 5		PRACH.2 FR1	Table A.7.1-1
	Config 3, 6		PRACH.2 FR1	Table A.7.1-1
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdBFRSSB	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for q_0 in activated SCell	Config 1, 4		CSI-RS.1.2 FDD	A.1.4
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	

CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	A.1.4
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS in PSCell	Config 1, 4		CSI-RS.1.2 FDD	A.1.4
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

4.5.5.5.4.2 Test procedure

Same test procedure as described in section 4.5.5.3.4.2, except following exception and steps 7 and 8:

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2 and cell 3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

7. If the SS:

   a) detects uplink power on the PCell equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect preamble on the PCell before time point B

   and

   c) detects preamble on the preconfigured PRACH resource before time point F (D1 after the start of T5).

   And

   d) SS transmits a RAR to UE after receiving the preamble transmitted by the UE. SS detects the MAC-CE on the PCell transmitted by the UE providing the index for the activated SCell, and the index for the SSB provided by higher layer.

   the number of successful tests is increased by one.

Otherwise the number of failed tests is increased by one.

8. If the iteration or random access procedure for BFD fails, the SS shall first attempt to release and add the FR1 SCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.

4.5.5.5.4.3 Message contents

Same message contents as described in section 4.5.5.3.4.3 with following exceptions:

Table 4.5.5.5.4.3-1: Common Exception messages for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-10 with Condition SSB CBD

4.5.5.5.5 Test requirements

Table 4.5.5.5.5-1: Cell specific test parameters for FR1 PSCell and SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Cell2	Test 1 Cell3				
			T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_SSB of set q_0	Config 1, 4	dB	5.8	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2, 5		5.8	5.8	-2.2	-12.8	-12.8	-12.8
	Config 3, 6		5.8	5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set q_1	Config 1, 4	dB	-10.2	-10.2	-10.2	10.2	10.2	10.2
	Config 2, 5		-10.2	-10.2	-10.2	10.2	10.2	10.2
	Config 3, 6		-10.2	-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q1	Config 1, 4	dBm/SCS kHz	-108.2	-108.2	-108.2	-87.8	-87.8	-87.8
	Config 2, 5		-108.2	-108.2	-108.2	-87.8	-87.8	-87.8
	Config 3, 6		-105.2	-105.2	-105.2	-84.8	-84.8	-84.8
N_{oc}	Config 1, 4	dBm/15 kHz	-98	-98				
	Config 2, 5		-98	-98				
	Config 3, 6		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause [A.3.6].

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1. The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

4.5.5.6 EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in DRX

4.5.5.6.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS based beam failure in the set q_0 configured for a serving SCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

4.5.5.6.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward supporting EN-DC FR1, CSI-RS based RLM, and SSB link recovery and long DRX cycle.

4.5.5.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.5.4.

4.5.5.6.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 4.5.5.6.4.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure 4.5.5.6.4.1-1

additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

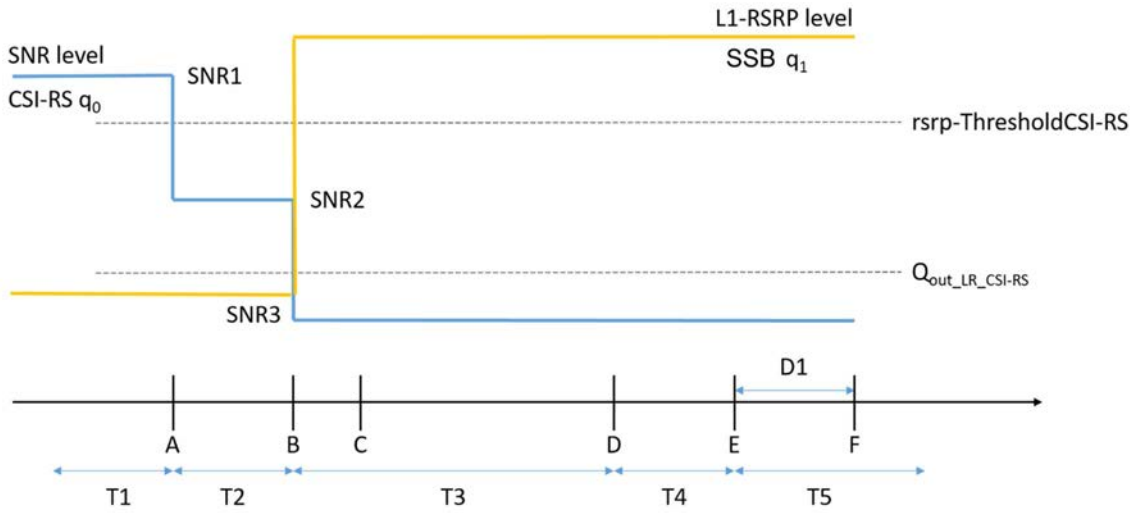

Figure 4.5.5.6.4.1-1: SNR and L1-RSRP variation for beam failure detection and LR testing for SCell in DRX mode

4.5.5.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.5.6.4.1-1.

Table 4.5.5.6.4.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
4.5.5.6-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.6-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.6-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4.5.5.6-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.6-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.6-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 4.5.5.6.4.1-2.

Table 4.5.5.6.4.1-2: Initial conditions for EN-DC FR1 SCell CSI-RS-based beam failure detection and link recovery in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.5.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 4.5.5.6.4.1-3.

2. Message contents are defined in clause 4.5.5.6.4.3.

3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR cell (PSCell) and Cell 3 is the NR cell (SCell) with the power level set according to Annex C.1.2 and C.1.3 for this test

Table 4.5.5.6.4.1-3: General test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number for PSCell			2	
Active SCell			Cell 3	
RF Channel Number for SCell			3	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.1 FR1	A.3
	Config 2, 5		SSB.1 FR1	
	Config 3, 6		SSB.2 FR1	
SMTC Configuration	Config 1, 2, 3, 4, 5, 6		SMTC.1	A.4
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5	kHz	15	
	Config 3, 6		30	
PRACH Configuration	Config 1, 2, 4, 5		PRACH.2 FR1	
	Config 3, 6		PRACH.2 FR1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	

		Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
		Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
		DMRS precoder granularity		REG bundle size	
		REG bundle size		6	
DRX				DRX.7	A.5
Gap pattern ID				N.A.	
schedulingRequestID-BFR-SCell-r16				absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell				1	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0. ((TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2, 4, 5		dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6			-95	
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer				pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for q_0 in activated SCell	Config 1, 4			CSI-RS.1.2 FDD	A.1.4
	Config 2, 5			CSI-RS.1.2 TDD	
	Config 3, 6			CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4			CSI-RS.1.1 FDD	A.1.4
	Config 2, 5			CSI-RS.1.1 TDD	
	Config 3, 6			CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4			TRS.1.1 FDD	
	Config 2, 5			TRS.1.1 TDD	
	Config 3, 6			TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS in PSCell	Config 1, 4			CSI-RS.1.2 FDD	A.1.4
	Config 2, 5			CSI-RS.1.2 TDD	
	Config 3, 6			CSI-RS.2.2 TDD	

T310 Timer	ms	1000	
N310		2	
T1	s	1	During this time the UE shall be fully synchronized to cell 1
T2	s	8.37	
T3	s	6.44	
T4	s	0	
T5	s	1.97	
D1	s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

4.5.5.6.4.2 Test procedure

Same test procedure as described in section 4.5.5.4.4.2, except following exception and steps 7 and 8:

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1, Cell 2 and Cell 3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

7. If the SS:

   a) detects uplink power on the PCell equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect preamble on the PCell before time point B

   and

   c) detects preamble on the preconfigured PRACH resource before time point F (D1 after the start of T5).

   And

   d) SS transmits a RAR to UE after receiving the preamble transmitted by the UE. SS detects the MAC-CE on the PCell transmitted by the UE providing the index for the activated SCell, and the index for the SSB provided by higher layer.

   the number of successful tests is increased by one.

Otherwise the number of failed tests is increased by one.

8. If the iteration or random access procedure for BFD fails, the SS shall first attempt to release and add the FR1 SCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.

4.5.5.6.4.3 Message contents

Same message contents as described in section 4.5.5.4.4.3 with following exceptions:

Table 4.5.5.6.4.3-1: Common Exception messages for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-10 with Condition SSB CBD

4.5.5.6.5 Test requirement

Tables 4.5.5.6.4.1-3 and 4.5.5.6.5-1 define the primary level settings including test tolerances for EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX.

Table 4.5.5.6.5-1: Cell specific test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Cell2	Test 1 Cell3				
			T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_SSB of set q_0	Config 1, 4	dB	5.8	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2, 5		5.8	5.8	-2.2	-12.8	-12.8	-12.8
	Config 3, 6		5.8	5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set q_1	Config 1, 4	dB	-10.2	-10.2	-10.2	10.2	10.2	10.2
	Config 2, 5		-10.2	-10.2	-10.2	10.2	10.2	10.2
	Config 3, 6		-10.2	-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q1	Config 1, 4	dBm/SCS kHz	-108.2	-108.2	-108.2	-87.8	-87.8	-87.8
	Config 2, 5		-108.2	-108.2	-108.2	-87.8	-87.8	-87.8
	Config 3, 6		-105.2	-105.2	-105.2	-84.8	-84.8	-84.8
N_{oc}	Config 1, 4	dBm/ 15 kHz	-98	-98				
	Config 2, 5		-98	-98				
	Config 3, 6		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1. The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

4.5.5.7 EN-DC FR1 PSCell TRP specific SSB-based beam failure detection and link recovery in non-DRX

Editor's Note: This test case is incomplete in following aspects:

- TS 38.522 applicability spec update is pending

4.5.5.7.1 Test Purpose

The purpose of this test is to verify that the UE properly detects the TRP specific SSB-based beam failure in the set (q0,0), (q0,1) configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set (q1,0) and (q1,1). The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell with *schedulingRequestID-BFR-r17* configured, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

4.5.5.7.2 Test applicability

This test applies to all types of E-UTRA UE release 17 and forward, supporting EN-DC and link recovery.

4.5.5.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.5.7.

4.5.5.7.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 4.5.5.7.4-1 shows the variation of the downlink SNR of the PSCell and the SNR of the SSB in set q0 in the active PSCell to emulate SSB based beam failure. Figure 4.5.5.7.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q1 of the candidate beam used for link recovery.

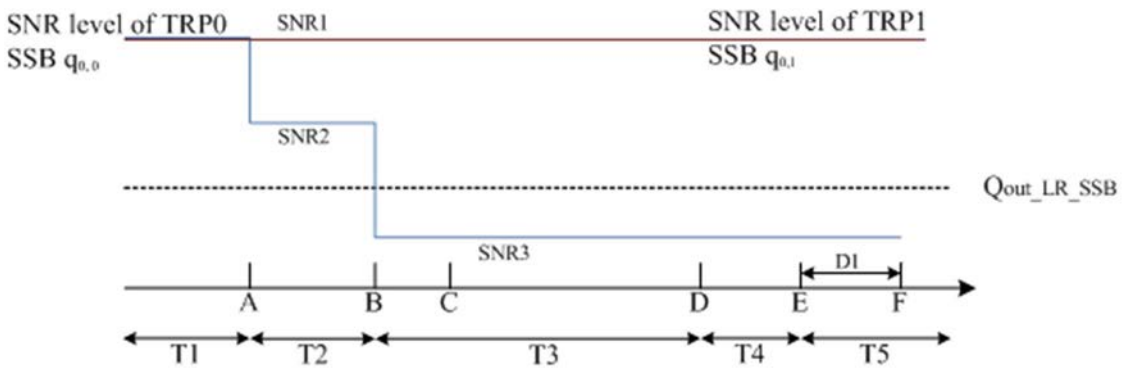

Figure 4.5.5.7.4-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

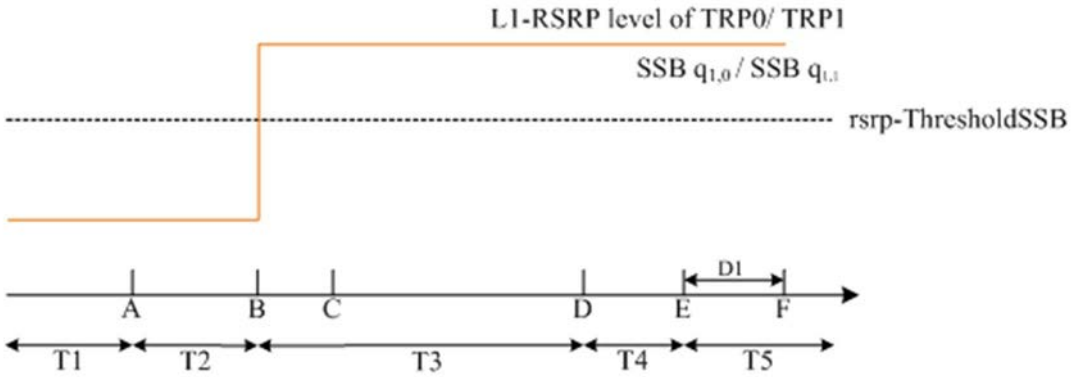

Figure 4.5.5.7.4-2: L1-RSRP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

4.5.5.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.5.7.4.1-1.

Table 4.5.5.7.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 4.5.5.7.4.1-2.

Table 4.5.5.7.4.1-2: Initial conditions for TRP specific EN-DC FR1 SSB-based beam failure detection and link recovery in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.5.7.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 4.5.5.7.4.1-3.
2. Message contents are defined in clause 4.5.5.7.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test

Table 4.5.5.7.4.1-3: General test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number for PSCell			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BW channel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
SSB Configuration for TRP0	Config 1, 4		SSB.3 FR1	
	Config 2, 5		SSB.3 FR1	
	Config 3, 6		SSB.4 FR1	
SSB Configuration for TRP1	Config 1, 4		SSB.7 FR1	
	Config 2, 5		SSB.7 FR1	
	Config 3, 6		SSB.8 FR1	
SMTC Configuration	Config 1, 2, 3, 4, 5, 6	kHz	SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15	
	Config 3, 6		30	
PRACH Configuration	Config 1, 2, 4, 5		PRACH.2 FR1	CFRA for BFR
	Config 3, 6		PRACH.2 FR1	CFRA for BFR
SSB Index assigned as BFD RS (q0,0)			0	
SSB Index assigned as CBD RS (q1,0)			1	

SSB Index assigned as BFD RS (q0,1)			2	
SSB Index assigned as CBD RS (q1,1)			3	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
schedulingRequestID-BFR- r17			Configured	
Periodicity of PUCCH for SR configuration for BFR on PSCell	Config 1, 2, 4, 5	slot	5	5ms
	Config 3, 6		10	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdBFR	Config 1, 2, 4, 5	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], clause 5.17
SSB Index assigned as RLM RS			0,1,2,3	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.				

4.5.5.7.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS sends an *RRCReconfiguration* (embeded in *RRCConnectionReconfiguration* message) message to the UE to configure inter-frequency measurement.

3. The UE sends an RRCReconfigurationComplete (embeded in RRCConnectionReconfigurationComplete message) message.

4. Set the parameters of NR Cell according to T1 in Table 4.5.5.7.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR values of TRP1 and TRP2 to T2 as specified in Table 4.5.5.7.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR values of TRP1 and TRP2 to T3 as specified in Table 4.5.5.7.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR values of TRP1 and TRP2 to T4 as specified in Table 4.5.5.7.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR values of TRP1 and TRP2 to T5 as specified in Table 4.5.5.7.5-1. T5 starts.

9. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect preamble on a beam associated with the candidate beam set $q_{1,0}$ and $q_{1,1}$ before time point B; and

   c) detects preamble on a beam associated with the candidate beam set $q_{1,0}$ and $q_{1,1}$ before time point F (D1 after the star of T5), the number of successful tests is increased by one.

   Otherwise, the number of failed tests is increased by one.

10. If the iteration or random access procedure for BFD fails, the SS shall first attempt to release and add the PSCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.5.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.5.7.4.3-1: Common Exception messages for EN-DC FR1 SSB-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-8A with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition BFD Table H.3.5-4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.5.5.7.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 4.5.5.7.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 4.5.5.7.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 4.5.5.7.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		

cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

Table 4.5.5.7.4.3-6: *MAC-CellGroupConfig for R17 BFR*

Derivation Path: TS 38.508-1, Table 4.6.3-68			
Information Element	Value/remark	Comment	Condition
MAC-CellGroupConfig ::= SEQUENCE {			
schedulingRequestID-BFR-r17	Not present		
schedulingRequestID-BFR2-r17	Not present		
schedulingRequestConfig-v1700	SchedulingRequest-Config		
}			

4.5.5.7.5 Test requirements

Tables 4.5.5.7.4.1-3 and 4.5.5.7.5-1 define the primary level settings including test tolerances for EN-DC FR1 SSB-based beam failure detection and link recovery in non-DRX.

Table 4.5.5.7.5-1: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q0,0	Config 1, 4	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2, 5		5.8	-2.2	-12.8	-12.8	-12.8
	Config 3, 6		5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q0,1	Config 7,10	dB	5.8	5.8	5.8	5.8	5.8
	Config 8, 11		5.8	5.8	5.8	5.8	5.8
	Config 9, 12		5.8	5.8	5.8	5.8	5.8
SNR_SSB of set q1,0	Config 1, 4	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 2, 5		-10.2	-10.2	10.2	10.2	10.2
	Config 3, 6		-10.2	-10.2	10.2	10.2	10.2
SNR_SSB of set q1,1	Config 7, 10	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 8, 11		-10.2	-10.2	10.2	10.2	10.2
	Config 9, 12		-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q1,0	Config 1, 4	dBm/SCS kHz	-108.2	-108.2	-87.8	-87.8	-87.8
	Config 2, 5		-108.2	-108.2	-87.8	-87.8	-87.8
	Config 3, 6		-105.2	-105.2	-84.8	-84.8	-84.5
SSB_RP of set q1,1	Config 7, 10	dBm/SCS kHz	-108.2	-108.2	-87.8	-87.8	-87.8
	Config 8, 11		-108.2	-108.2	-87.8	-87.8	-87.8
	Config 9, 12		-105.2	-105.2	-84.8	-84.8	-84.5
N_{oc}	Config 1, 4	dBm/15 KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 4.5.5.7.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6 of 38.133.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$ and $q_{1,1}$.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

4.5.5.8 EN-DC FR1 SCell TRP specific CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX

Editor's Note: This test case is incomplete in following aspects:

- TS 38.522 applicability spec update is pending

4.5.5.8.1 Test purpose

The purpose of this test is to verify that the UE properly detects the CSI-RS-based beam failure on the TRP using the respective configured BFD set $\bar{q}_{0,0}$ for TRP0 and $\bar{q}_{0,1}$for TRP1. After the BFD is detected for the TRP, the test further verifies whether the UE performs the correct SSB-based link recovery based on the configured beam candidate set $\bar{q}_{1,0}$ for TRP0 and $\bar{q}_{1,1}$ for TRP1. In the test one TRP (TRP0) is provided with schedulingRequestID-BFR-r17 and other TRP (TRP1) is not provided with scheduling request ID. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

4.5.5.8.2 Test applicability

This test applies to all types of E-UTRA UE release 17 and forward supporting EN-DC FR1, CSI-RS based RLM, and SSB link recovery.

4.5.5.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.5.8.

4.5.5.8.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 4.5.5.8.2-1 shows the SNR of the CSI-RS in set $q_{0,0}$ in the TRP0 to emulate beam failure. Figure 4.5.5.8.2-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_{10} and q_{11} of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2 and cell3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

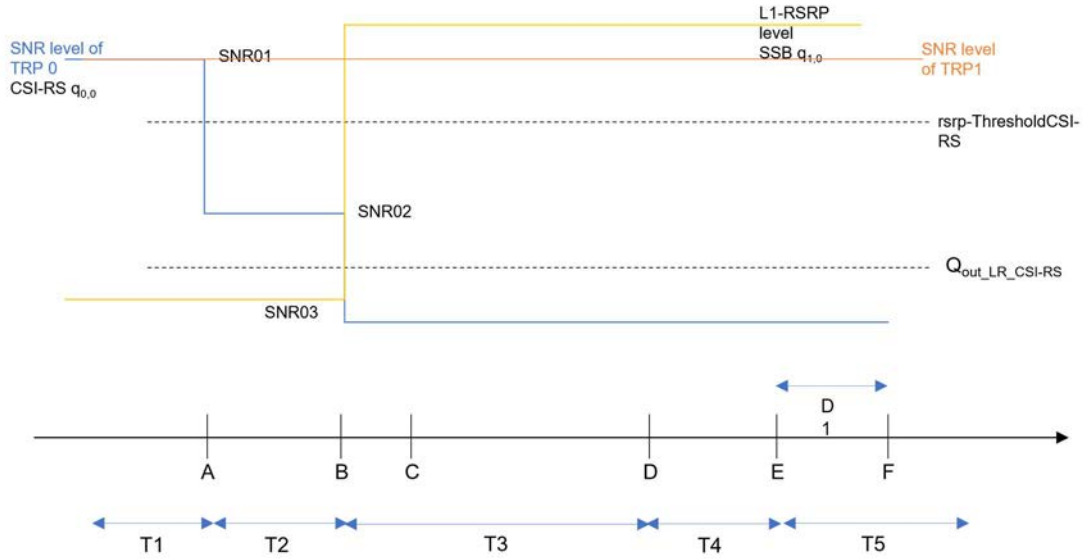

Figure 4.5.5.8.4-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing for TRP0 in non-DRX mode

4.5.5.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.5.8.4.1-1.

Table 4.5.5.8.4.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
4.5.5.8-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.8-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.8-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4.5.5.8-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.5.8-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.5.8-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.5.8.4.1-2.

Table 4.5.5.8.4.1-2: Initial conditions for TRP specific EN-DC FR1 Scell CSI-RS-based beam failure detection and link recovery in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.5.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part	

1. The general test parameter settings are set up according to Table 4.5.5.8.4.1-3.
2. Message contents are defined in clause 4.5.5.8.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR cell (PSCell) and Cell 3 is the NR cell (SCell) with the power level set according to Annex C.1.2 and C.1.3 for this test

Table 4.5.5.8.4.1-3: General test parameters for TRP specific EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX

Parameter		Unit	Value	Comment
			Test 1	Same configuration for both TRP wherever applicable
Active PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number for PSCell			2	
Active SCell			Cell 3	
RF Channel Number for SCell			3	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BW channel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.1 FR1	A.3.10 Same configuration for both TRP
	Config 2, 5		SSB.1 FR1	
	Config 3, 6		SSB.2 FR1	
SMTC Configuration	Config 1, 2, 3, 4, 5, 6	kHz	SMTC.1	A.4, Same configuration for both TRP
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15	
	Config 3, 6		30	
PRACH Configuration	Config 1, 2, 4, 5		PRACH.2 FR1	Table A.7.1-1
	Config 3, 6		PRACH.2 FR1	Table A.7.1-1
csi-RS-Index assigned as beam failure detection RS in set q_{00} in activated SCell			0	
csi-RS-Index assigned as beam failure detection RS in set q_{01} in activated SCell			2	
OCNG parameters			OP.1	A.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission	DCI format		1-0	
	Number of Control OFDM		2	

parameters	symbols			
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-r17			Configured, 1-2	
Periodicity of PUCCH for SR configuration for BFR on SCell	Config 1, 2, 4, 5	slot	5	5ms
	Config 3, 6		10	
schedulingRequestID-BFR2-r17			absent	When the field is absent, the random access procedure will be triggered for TRP BFR
Periodicity of PUCCH for SR configuration for BFR on TRP0		Slot	5	
SSB Index assigned as CBD RS (q10) in activated SCell			1	
SSB Index assigned as CBD RS (q11) in activated SCell			3	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdBFR	Config 1, 2, 4, 5	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], clause 5.17
BFD-RS (CSI-RS) configuration for q_{00} in activated SCell	Config 1, 4		CSI-RS.1.2 FDD	A.1.4
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
BFD-RS (CSI-RS) configuration for q_{01} in activated SCell	Config 1, 4		CSI-RS.1.7 FDD	A.1.4
	Config 2, 5		CSI-RS.1.6 TDD	
	Config 3, 6		CSI-RS.2.7 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	A.1.4
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS in PSCell	Config 1, 4		CSI-RS.1.2 FDD	A.1.4
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully

			synchronized to cell 1
T2	s	0.18	
T3	s	0.14	
T4	s	0	
T5	s	0.17	
D1	s	0.06	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

4.5.5.8.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2 and cell 3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell according to T1 in Table 4.5.5.8.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR1 and SNR2 values to T2 as specified in Table 4.5.5.8.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR1 and SNR2 values to T3 as specified in Table 4.5.5.8.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR1 and SNR2 values to T4 as specified in Table 4.5.5.8.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR1 and SNR2 values to T5 as specified in Table 4.5.5.8.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on the PCell equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect PUCCH with LRR in the resource configured for BFR on TRP0 on the PCell before time point B

   and

   c) detects PUCCH with LRR in the resource configured for BFR on TRP0, followed by BFR MAC CE containing a beam associated with the candidate beam set q1,0 before time point F (D1 after the start of T5).

   the number of successful tests is increased by one.

Otherwise the number of failed tests is increased by one.

8. If the iteration or random access procedure for BFD fails, the SS shall first attempt to release and add the FR1 SCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.5.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.5.8.4.3-1: Common Exception messages for TRP specific EN-DC FR1 CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8A with Condition SSB BFD Table H.3.1-10 with Condition SSB CBD

Table 4.5.5.8.4.3-2: *MAC-CellGroupConfig for R17 BFR*

Derivation Path: TS 38.508-1, Table 4.6.3-68			
Information Element	Value/remark	Comment	Condition
MAC-CellGroupConfig ::= SEQUENCE {			
schedulingRequestID-BFR-r17	Not present		
schedulingRequestID-BFR2-r17	Not present		
schedulingRequestConfig-v1700	SchedulingRequest-Config		
}			

4.5.5.8.5 Test requirements

Table 4.5.5.8.5-1: Cell specific test parameters for FR1 PSCell and SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Cell2	TRP 0/1 Cell3				
			T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_{00}	Config 1, 4	dB	5.8	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2, 5		5.8	5.8	-2.2	-12.8	-12.8	-12.8
	Config 3, 6		5.8	5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set q_{01}	Config 1, 4		5.8	5.8	5.8	5.8	5.8	5.8
	Config 2, 5		5.8	5.8	5.8	5.8	5.8	5.8
	Config 3, 6		5.8	5.8	5.8	5.8	5.8	5.8
SNR_SSB of set q_{10}	Config 1, 4	dB	-10.2	-10.2	-10.2	10.2	10.2	10.2
	Config 2, 5		-10.2	-10.2	-10.2	10.2	10.2	10.2

	Config 3, 6		-10.2	-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_{10}	Config 1, 4	dBm/SCS kHz	-108.2	-108.2	-108.2	-87.8	-87.8	-87.8
	Config 2, 5		-108.2	-108.2	-108.2	-87.8	-87.8	-87.8
	Config 3, 6		-105.2	-105.2	-105.2	-84.8	-84.8	-84.8
N_{oc}	Config 1, 4	dBm/15 kHz	-98	-98				
	Config 2, 5		-98	-98				
	Config 3, 6		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 4.5.5.8.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause in clause A.3.6.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure on both TRP0 and TRP 1 and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$ and $q_{1,1.}$

For TRP0, no later than time point F occurring no later than D1 = 60ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the BFR MAC CE from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

4.5.6 Active BWP switch delay

4.5.6.1 DCI-based and time-based active BWP switch

4.5.6.1.0 Minimum conformance requirements

4.5.6.1.0.1 Minimum conformance requirements for DCI-based and time-based active BWP switch

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP

on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (FR1) or DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [13] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* [13] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 4.5.6.1.0.1-1.

Table 4.5.6.1.0.1-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5
2	0.25	3	9
3	0.125	6	18
NOTE 1: Depends on UE capability. NOTE 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP:

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in TS 38.133 [6] Clause 8.10 in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in TS 38.133 [6] Clause 8.10 in the new BWP.

If the BWP switch is triggered within DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321, 12], UE shall be able to complete active BWP switching within:

- $T_{BWPswitchDelay}$, provided that the BWP switching request is received in any of the first 3 OFDM symbols of a slot corresponding to the serving cell where BWP switching occurs, or

- $T_{BWPswitchDelay}$ + 1, provided that the BWP switching request is received after the first 3 OFDM symbols of a slot corresponding to the serving cell where BWP switching occurs

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this section apply for each BWP switch.

When UE receives a DCI indicating UE to switch its active BWP involving changes in any of the parameters listed in Table 4.5.6.1.0.1-3, the UE is allowed to cause interruption of up to X slot to other active serving cells if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 4.5.6.1.0.1-3 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP

switching. X is defined in Table 4.5.6.1.0.1-2. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in TS 38.133 [6] clause 8.6.2. Interruptions are not allowed during BWP switch involving any other parameter change.

When a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [13] expires, UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 4.5.6.1.0.1-3 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 4.5.6.1.0.1-3 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 4.5.6.1.0.1-2. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in TS 38.133 [6] clause 8.6.2. Interruptions are not allowed during BWP switch involving any other parameter change.

Table 4.5.6.1.0.1-2: interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5
NOTE: Void.		

Table 4.5.6.1.0.1-3: Parameters which cause interruption other than SCS

Parameters	Comment
locationAndBandwidth	From TS 38.331 [13]
nrofSRS-Ports	
maxMIMO-Layers-r16	

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this section apply for each BWP switch.

DCI-based or timer-based downlink BWP and/or uplink BWP switching due to change in any of the parameters listed in Table 8.2.1.2.7-2 of TS 38.133 [6] or SCS in NR PSCell or in any NR SCell may cause an interruption on PCell or on activated SCell(s) in the MCG. Interruptions are not allowed during BWP switch involving other parameter change.

Uplink BWP switching on a NR PSCell triggered by consistent uplink LBT failures on the NR PSCell may cause an interruption on PCell or on activated SCell(s) in the MCG.

The starting time of interruption due to DCI-based or timer-based downlink BWP and/or uplink BWP switching or due to uplink BWP switching on a NR PSCell triggered by consistent uplink LBT failures on the NR PSCell is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2 of TS 38.133 [6].

RRC-based downlink BWP and/or uplink BWP switching due to change in any of the parameters listed in Table 8.2.1.2.7-2 of TS 38.133 [6] or SCS in NR PSCell or in any NR SCell may cause an interruption on PCell or on activated SCell(s) in the MCG. Interruptions are not allowed during BWP switch involving other parameter change.

The interruption due to RRC-based downlink BWP and/or uplink BWP switching is allowed anywhere within the BWP switching delay ($T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$) defined in clause 8.6.3 of TS 38.133 [6]. The interruption due to RRC-based downlink BWP and/or uplink BWP switching defined in this clause is applicable provided that:

- the RRC reconfiguration requires the UE to only switch its active BWP; and
- the BWP switching occurs on only one NR serving cell.

When BWP switch involves SCS changes:

- the UE is allowed to cause interruption on PCell or on any activated SCell(s) regardless of the frequency range of the NR PCell or NR SCell on which the BWP switching occurs.

Otherwise:

- the UE capable of per UE measurement gap [29] is allowed to cause interruption on PCell or on any activated SCell(s) regardless of the frequency range of the NR PSCell or NR SCell on which the BWP switching occurs;
- the UE capable of per FR measurement gap [29] is allowed to cause interruption on PCell or on any activated SCell(s) provided that the NR PSCell or NR SCell on which the BWP switching occurs belongs to FR1.

The interruption on PCell or on any activated SCell(s) shall not exceed:

- 1 subframe in synchronous EN-DC;
- 2 subframes in asynchronous EN-DC.

The normative reference for this requirement is TS 38.133 [6] clauses 8.6.2, 8.2.1.2.7 and TS 36.133 [23] clause 7.32.2.7.

4.5.6.1.1 EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC

4.5.6.1.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS 38.133 [6] clause 8.6, and interruption requirement for E-UTRA victim cell defined in TS 36.133 [23] clause 7.32.2.7.

4.5.6.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 onwards, supporting EN-DC, BWP adaptation of at least 2BWPs, DCI and timer-based active BWP switching delay Type1 or Type2.

4.5.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.6.1.1.

4.5.6.1.1.4 Test description

4.5.6.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.6.1.1.4.1-1.

Table 4.5.6.1.1.4.1-1: Supported test configurations for FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC

Config	Description
4.5.6.1.1-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.6.1.1-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.6.1.1-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4.5.6.1.1-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.6.1.1-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.6.1.1-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: A UE which fulfils the requirements in test case 4.5.6.1.2 can skip the test cases in clause 4.5.6.1.1.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.6.1.1.4.1-2.

Table 4.5.6.1.1.4.1-2: Initial conditions for FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.

Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 4.5.6.1.1.4.1-3.
2. Message contents are defined in clause 4.5.6.1.1.4.3.
3. The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 are configured according to clause C.1.2 and C.1.3.

4. By step 4 of the test procedure:

- UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in PSCell.
- UE is configured with a bwp-InactivityTimer timer value for PSCell.

Table 4.5.6.1.1.4.1-3: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
bwp-InactivityTimer	ms	200	
PDCCH and PDSCH maximum number of HARQ transmission		1	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

4.5.6.1.1.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

All cells have constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 4.5.6.1.1.4.1-3 and 4.5.6.1.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures 2 different UE-specific bandwidth parts, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB. The SSindicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to Table 4.5.6.1.1.4.3-2. UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. The SS shall send a DCI format 1_1 command for PSCell DL BWP switch.

6. The UE shall receive the DCI format 1_1 command in PSCell's slot # denoted i, then T1 starts and the UE switch its bandwidth part from BWP-1 to BWP-2:

   a) If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of the DL slot (i+$T_{BWPswitchDelay}$+k_1); and

   b) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot (i+$T_{BWPswitchDelay}$+ 1 subframe + k); and

   c) If the number of consecutive missing ACK/NACK for PCell is no more than 1.

      Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

7. If the UE sends valid ACK/NACK for the PSCell on BWP-2, T2 starts. During T2, the SS shall not transmit DCI format for PDSCH reception on PSCell.

8. T3 starts from the first slot #j of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires and the SS restarts to send DCI format for PDSCH reception on PSCell. Then, the UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part - BWP-1 on PSCell:

   a) If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of the DL slot (j+$T_{BWPswitchDelay}$+k_1); and

   b) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot (j+$T_{BWPswitchDelay}$+ 1 subframe + k); and

   c) If the number of consecutive missing ACK/NACK for PCell is no more than 1

      Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

9. Repeat steps 5-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

The SS verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The SS verifies that potential interruption to E-UTRA PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of PSCell, respectively.

"*k*" is the length (slot) between E-UTRA PCell PDSCH and its corresponding ACK/NACK as specified in TS 36.213 [33].

If all subtests pass, the test passes. If one subtest fails, the test fails.

4.5.6.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.6.1.1.4.3-1: Common Exception messages for FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1

Table 4.5.6.1.1.4.3-1A: *RRCReconfiguration* (Step3)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 4.5.6.1.1.4.3-1B	
}			
}			
}			

Table 4.5.6.1.1.4.3-1B: *CellGroupConfig* (Table 4.5.6.1.1.4.3-1A)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PSCell		
spCellConfigDedicated	ServingCellConfig	Table 4.5.6.1.1.4.3-2	
}			
}			

Table 4.5.6.1.1.4.3-2: *ServingCellConfig* (Table 4.5.6.1.1.4.3-1B)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 4.5.6.1.1.4.3-3	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 4.5.6.1.1.4.3-3	

}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 4.5.6.1.1.4.3-4	
BWP-Uplink[2]	BWP-Uplink with condition BWP2	entry 2 Table 4.5.6.1.1.4.3-4	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 4.5.6.1.1.4.3-3: *BWP-Downlink* (Table 4.5.6.1.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 4.5.6.1.1.4.3-8	
}			
}			
}			

Table 4.5.6.1.1.4.3-4: *BWP-Uplink* (Table 4.5.6.1.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1

	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3	BWP-2	BWP2
}			
}			

Table 4.5.6.1.1.4.3-5: *Void*

Table 4.5.6.1.1.4.3-6: *PDSCH-TimeDomainResourceAllocationList* (Table 4.5.6.1.1.4.3-8)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	$T_{BWPswitchDelay}$	Defined in Table 4.5.6.1.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 4.5.6.1.1.4.3-7: *Void*

Table 4.5.6.1.1.4.3-8: *PDSCH-ConfigCommon* (Table 4.5.6.1.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 4.5.6.1.1.4.3-6	
}			

4.5.6.1.1.5 Test requirements

Tables 4.5.6.1.1.4.1-3 and 4.5.6.1.1.5-1 define the primary level settings including test tolerances.

Table 4.5.6.1.1.5-1: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10 MHz: $N_{RB,c}$ = 52
	Config 2,5		10 MHz: $N_{RB,c}$ = 52
	Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,4		DLBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-2 Configuration	Config 1,4		DLBWP.1.3 Note 4
	Config 2,5		
	Config 3,6		
Initial UL BWP Configuration	Config 1,4		ULBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-2 Configuration	Config 1,4		N/A
	Config 2,5		ULBWP.1.3 Note 4
	Config 3,6		ULBWP.1.3 Note 4
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2,5		CCR.1.2 TDD
	Config 3,6		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2,4,5	dBm/SCS	-104
	Config 3,6		-101
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1,2,4,5	dBm/SCS	-87

Parameter		Unit	Cell 2
	Config 3,6		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io^{Note3}	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled. NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].			

During T1, the UE shall start to send the ACK/NACK for PSCell from the first UL slot that occurs after the beginning of DL slot (i+$T_{BWPswitchDelay}$+k_1).

During T3, the UE shall start to send the ACK/NACK for PSCell from the first UL slot that occurs after the beginning of DL slot (j+$T_{BWPswitchDelay}$+k_1).

Where, k_1 is the timing between DL data receiving and acknowledgement as specified in 38.214 [9].

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in TS 38.133 [6] Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of E-UTRA PCell interruption during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of E-UTRA PCell interruption of during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of E-UTRA PCell shall not be longer than the interruption duration specified for active BWP switch in TS 36.133 [23] clause 7.32.2.7.

All of the above test requirements shall be fulfilled in order for the observed E-UTRA PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot (i+ $T_{BWPswitchDelay}$+k_1), (j+ $T_{BWPswitchDelay}$+k_1), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

4.5.6.1.2 EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC

Editor's Note: TT analysis for test configuration with SpCC SCS = 15kHz + SCC SCS = 30kHz or SpCC SCS = 30kHz + SCC SCS = 15kHz are still missing.

4.5.6.1.2.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS 38.133 [6] clause 8.6, and interruption requirements for NR victim cell defined in TS 38.133 [6] clause 8.2.1.2.7 and interruption requirement for E-UTRA victim cell defined in clause 7.32.2.7 of TS 36.133 [23].

4.5.6.1.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 onwards, supporting EN-DC, BWP adaptation of at least 2BWPs, DCI and timer-based active BWP switching delay Type1 or Type2 and 2DL CA.

4.5.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.6.1.2.

4.5.6.1.2.4 Test description

4.5.6.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. Supported test configurations for LTE PCell and NR PSCell are shown in Table 4.5.6.1.2.4.1-1. Supported test configurations for NR SCell are shown in Table Table 4.5.6.1.2.4.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

Table 4.5.6.1.2.4.1-1: Supported test configurations for FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC for LTE PCell and NR PSCell

Config	Description
4.5.6.1.2-1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
4.5.6.1.2-2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
4.5.6.1.2-3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4.5.6.1.2-4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
4.5.6.1.2-5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
4.5.6.1.2-6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: A UE which fulfils the requirements in test case 4.5.6.1.2 can skip the test cases in clause 4.5.6.1.1. Note 3: Void Note 4: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table 4.5.6.1.2.4.1-1A: Supported test configurations for FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in test case 4.5.6.1.2 can skip the test cases in 4.5.6.1.1. Note 3: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Configure the test equipment and the DUT according to the parameters in Table 4.5.6.1.2.4.1-2.

Table 4.5.6.1.2.4.1-2: Initial conditions for FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 4.5.6.1.2.4.1-1.	

Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 4.5.6.1.2.4.1-3.

2. Message contents are defined in clause 4.5.6.1.2.4.3.

3. There are one E-UTRAN carrier and two NR carriers and three cells specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on one NR carrier and Cell 3 is the NR SCell on the other NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Annex A.6. Cell 2 and Cell 3 are configured according to clauses C.1.2 and C.1.3.

4. By step 4 of the test procedure:

   - UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).

   - UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 3 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

   - UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0 in Cell 2 before starting the test.

   - UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in SCell.

   - UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-0 in PSCell.

   - UE is configured with a bwp-InactivityTimer timer value for SCell.

Table 4.5.6.1.2.4.1-3: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	200	
PDCCH and PDSCH maximum number of HARQ transmission		1	For PCell, PSCell and SCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous cells
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

4.5.6.1.2.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) and PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 3 and the time duration of T2.

All cells have constant signal levels throughout the test:

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.1. Set the parameters according to Tables 4.5.6.1.2.4.1-3 and 4.5.6.1.2.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP* of Cell 3. This message also configures 2 different UE-specific bandwidth parts for Cell 3, BWP-1 and BWP-2,which always include the bandwidth of the initial DL BWP and SSB. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id* in SCell, and BWP-0 as the active DL BWP using *firstActiveDownlinkBWP-Id* in PSCell, according to Table 4.5.6.1.2.4.3-2. UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. The SS shall send a DCI format 1_1 command for SCell DL BWP switch.

6. The UE shall receive the DCI format 1_1 command in SCell's slot # denoted i, then T1 starts and the UE switch its bandwidth part from BWP-1 to BWP-2:

   a) If the UE starts to report valid ACK/NACK for SCell on PSCell from the first UL slot that occurs after the beginning of the DL slot (i+$T_{BWPswitchDelay}$+k_1); and

   b) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot (i+$T_{BWPswitchDelay}$+ 1 subframe + k); and

   c) If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of DL slot (i+$T_{BWPswitchDelay}$+ Interruption length + k_1); and

   d) If the number of consecutive missing ACK/NACK for PCell is no more than 1; and

   e) If the number of consecutive missing ACK/NACK for PSCell is no more than 1.

   Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

7. If the UE sends valid ACK/NACK for the SCell on PSCell on BWP-2, T2 starts. During T2, the SS shall not transmit DCI format for PDSCH reception on SCell.

8. T3 starts from the first slot #j of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires and the SS restarts to send DCI format for PDSCH reception on SCell. Then, the UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part, BWP-1, on SCell:

   a) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot (j+$T_{BWPswitchDelay}$+ 1 subframe + k); and

   b) If the UE starts to report valid ACK/NACK for SCell on PSCell from the first UL slot that occurs after the beginning of the DL slot (j+$T_{BWPswitchDelay}$+k_1); and

   c) If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of DL slot (i+$T_{BWPswitchDelay}$+ Interruption length + k_1); and

d) If the number of consecutive missing ACK/NACK for PCell is no more than 1; and

e) If the number of consecutive missing ACK/NACK for PSCell is no more than 1.Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

9. Repeat steps 5-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

The SS verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The SS verifies that potential interruption to E-UTRA PCell and NR PSCell is carried out in the correct time span by monitoring ACK/NACK sent in E-UTRA PCell and PSCell during BWP switch of SCell, respectively.

Interruption length is defined in TS 38.133 [6] Table 8.2.1.2.7-1.

k is the length (slot) between E-UTRA PCell PDSCH and its corresponding ACK/NACK as specified in TS 36.213 [33].

k_1 is the timing between NR DL data receiving and acknowledgement as specified in TS 38.214 [9].

If all subtests pass, the test passes. If one subtest fails, the test fails.

4.5.6.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.6.1.2.4.3-1: Common Exception messages for FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1

Table 4.5.6.1.2.4.3-1A: *RRCReconfiguration* (Step 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 4.5.6.1.2.4.3-1B	
}			
}			
}			

Table 4.5.6.1.2.4.3-1B: *CellGroupConfig* (Table 4.5.6.1.2.4.3-1A)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig	Table 4.5.6.1.2.4.3-2	
}			
}			
}			

Table 4.5.6.1.2.4.3-2: *ServingCellConfig* (Table 4.5.6.1.2.4.3-1B)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 4.5.6.1.2.4.3-3	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 4.5.6.1.2.4.3-3	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
}			

Table 4.5.6.1.2.4.3-3: *BWP-Downlink* (Table 4.5.6.1.2.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 4.5.6.1.2.4.3-9	
}			
}			
}			

Table 4.5.6.1.2.4.3-4: *Void*

Table 4.5.6.1.2.4.3-5: Void

Table 4.5.6.1.2.4.3-6: *PDSCH-TimeDomainResourceAllocationList* (Table 4.5.6.1.2.4.3-9)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	$T_{BWPswitchDelay}$	Defined in Table 4.5.6.1.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 4.5.6.1.2.4.3-7: *Void*

Table 4.5.6.1.2.4.3-8: *Void*

Table 4.5.6.1.2.4.3-9: *PDSCH-ConfigCommon* (Table 4.5.6.1.2.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 4.5.6.1.2.4.3-6	
}			

4.5.6.1.2.5 Test requirements

Tables 4.5.6.1.2.4.1-3 and 4.5.6.1.2.5-1 and 4.5.6.1.2.5-2 define the primary level settings including test tolerances.

Table 4.5.6.1.2.5-1: NR Cell specific test parameters for NR PSCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$			Note 7
$BW_{occupied}$	Config 1,2,4,5	RB	52 Note 5
	Config 3,6		106 Note 6
Active BWP ID			0
Initial DL BWP Configuration			DLBWP.0.2
Active DL BWP-0 Configuration			DLBWP.0.2
Active DL BWP-1 Configuration			N.A.
Active DL BWP-2 Configuration			N.A.
Initial UL BWP Configuration			ULBWP.0.2
Active UL BWP-0 Configuration			ULBWP.0.2
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2,5		CCR.1.2 TDD
	Config 3,6		CCR.2.4 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 Note 5
	Config 3,6		OP.1 Note 6
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].
Note 5:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7:	$N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table 4.5.6.1.2.5-2: NR Cell specific test parameters for NR SCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$			Note 7
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 5
	$Config_{SCell}$ 3		106 Note 6
Active BWP ID			1,2
Initial DL BWP Configuration			DLBWP.0.2
Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.3
Active DL BWP-2 Configuration			DLBWP.1.1
Initial UL BWP Configuration			N.A.
Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD
	$Config_{SCell}$ 2		SR.1.1 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell}$ 1		CCR.1.2 FDD
	$Config_{SCell}$ 2		CCR.1.2 TDD
	$Config_{SCell}$ 3		CCR.2.4 TDD
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 5
	$Config_{SCell}$ 3		OP.1 Note 6
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			

EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell}$ 1,2	dBm/9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/38.16MHz	-52.86

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot (i+$T_{BWPswitchDelay}$+k_1).

During T3, the UE shall start to send the ACK/NACK for SCell from the first UL slot that occurs after the beginning of DL slot (j+$T_{BWPswitchDelay}$+k_1).

Where, k_1 is the timing between DL data receiving and acknowledgement as specified in [9].

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in TS 38.133 [6] Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of E-UTRA PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of E-UTRA PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of E-UTRA PCell shall not be longer than the interruption duration specified for active BWP switch in clause 7.32.2.7 of TS 36.133 [23].

During T1, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PSCell shall not be longer than the interruption duration specified for active BWP switch in TS 38.133 [6] clause 8.6.2.

All of the above test requirements shall be fulfilled in order for the observed E-UTRA PCell and PSCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot (i+$T_{BWPswitchDelay}$+k_1), (j+$T_{BWPswitchDelay}$+k_1), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

4.5.6.2 RRC-based active BWP switch

4.5.6.2.0 Minimum conformance requirements

4.5.6.2.0.1 Minimum conformance requirements for RRC-based active BWP switch

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessing\,Delay}+T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

NR Slot length is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessing\,Delay}$ is the length of the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [29] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [13], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

The normative reference for this requirement is TS 38.133 [6] clauses 8.6.3.

4.5.6.2.1 EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC

4.5.6.2.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in TS 38.133 [6] clause 8.6.3.

4.5.6.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 onwards supporting EN-DC, BWP adaptation of at least 2BWPs.

4.5.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.6.2.1.

4.5.6.2.1.4 Test description

4.5.6.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.6.2.1.4.1-1.

Table 4.5.6.2.1.4.1-1: Supported test configurations for FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC

Config	Description
4.5.6.2.1-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.6.2.1-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.6.2.1-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4.5.6.2.1-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.5.6.2.1-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.5.6.2.1-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.6.2.1.4.1-2.

Table 4.5.6.2.1.4.1-2: Initial conditions for FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 4.5.6.2.1.4.1-3.
2. Message contents are defined in clause 4.5.6.2.1.4.3.
3. The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 are configured according to clause C.1.2 and C.1.3.
4. By step 4 of the test procedure:
   - UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
   - UE has bandwidth part BWP-1 in its RRC-configuration for Cell 2 (PSCell).
- UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in PSCell

Table 4.5.6.2.1.4.1-3: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
PDCCH and PDSCH maximum number of HARQ transmission		1	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC

T1	s	0.2	

4.5.6.2.1.4.2 Test procedure

The test consists of 1 time period, with duration of T1.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

All cells have constant signal levels throughout the test:

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 4.5.6.2.1.4.1-3 and 4.5.6.2.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall send an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures another UE-specific bandwidth part, BWP-1, and indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to the initial condition of Active BWP-1 in Table 4.5.6.2.1.5-1.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. The SS shall send an *RRCConnectionReconfiguration* message with updated bandwidth part configuration for PSCell DL BWP switch, changing the BWP according to the final condition of Active BWP-1 in Table 4.5.6.2.1.5-1.T1 starts.

6. The UE shall receive the *RRCConnectionReconfiguration* in PSCell's slot # denoted i and reconfigure its bandwidth part with the updated bandwidth part configuration:

7 If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of DL slot $i+X+k_1$then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one. Where,

   - X = 26 for test configuration 4.5.6.2-1, 4.5.6.2-2, 4.5.6.2-4 and 4.5.6.2-5;

- X = 52 for test configuration 4.5.6.2-3 and 4.5.6.2-6.

8. After the SS receives the ACK/NACK in step 5) or when T1 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 6 or step 7 fails, switch off and on the UE and go to step 1.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

The SS verifies the DL BWP switch time in PSCell by counting the slots from the time when the RRCConnectionReconfiguration message including updated BWP configuration is sent till the time when a valid ACK/NACK is received.

4.5.6.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.6.2.1.4.3-1: Common Exception messages for FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1

Table 4.5.6.2.1.4.3-1A: *RRCReconfiguration* (Step 3, Step 5)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 4.5.6.2.1.4.3-1B	
}			
}			
}			

Table 4.5.6.2.1.4.3-1B: *CellGroupConfig* (Table 4.5.6.2.1.4.3-1A)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PSCell		
spCellConfigDedicated	ServingCellConfig	Table 4.5.6.2.1.4.3-1C	
}			
}			

Table 4.5.6.2.1.4.3-1C: *ServingCellConfig* (Table 4.5.6.2.1.4.3-1B)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1] SEQUENCE {	BWP-Downlink	entry 1 Table 4.5.6.2.1.4.3-1D	
}			

firstActiveDownlinkBWP-Id	1	BWP-1	
defaultDownlinkBWP-Id	1	BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 4.5.6.2.1.4.3-1E	
}			
firstActiveUplinkBWP-Id	1	BWP-1	
}			
}			

Table 4.5.6.2.1.4.3-1D: *BWP-Downlink* (Table 4.5.6.2.1.4.3-1C)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 5
}			
}			

Table 4.5.6.2.1.4.3-1E: *BWP-Uplink* (Table 4.5.6.2.1.4.3-1C)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 5
}			
}			

Table 4.5.6.2.1.4.3-2: Void

4.5.6.2.1.5 Test requirements

Tables 4.5.6.2.1.4.1-3 and 4.5.6.2.1.5-1 define the primary level settings including test tolerances.

Table 4.5.6.2.1.5-1: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter			Unit	Cell 2
Frequency Range				FR1
Duplex mode		Config 1,4		FDD
		Config 2,3,5,6		TDD
TDD configuration		Config 1,4		Not Applicable
		Config 2,5		TDDConf.1.1
		Config 3,6		TDDConf.2.1
$BW_{channel}$		Config 1,4		10 MHz: $N_{RB,c}$ = 52
		Config 2,5		10 MHz: $N_{RB,c}$ = 52
		Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID				1
Initial DL BWP Configuration		Config 1,4		DLBWP.0.2 Note4
		Config 2,5		
		Config 3,6		
Initial UL BWP Configuration		Config 1,4		ULBWP.0.2 Note4
		Config 2,5		
		Config 3,6		
Initial Condition	Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.3 Note4
		Config 2,5		
		Config 3,6		
	Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.3 Note4
		Config 2,5		
		Config 3,6		
Final Condition	Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1 Note4
		Config 2,5		
		Config 3,6		
	Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1 Note4
		Config 2,5		
		Config 3,6		
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2,5		SR.1.1 TDD
		Config 3,6		SR.2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2,5		CR.1.1 TDD
		Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.2 FDD
		Config 2,5		CCR.1.2 TDD
		Config 3,6		CCR.2.4 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4,5		SSB.1 FR1
		Config 3,6		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2,5		TRS.1.1 TDD
		Config 3,6		TRS.1.2 TDD
Antenna Configuration				1x2
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2			dBm/15 kHz	-104
SS-RSRP Note 3			dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17

Parameter		Unit	Cell 2
Io[Note3]	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].			

During T1, the UE shall be ready for the reception of uplink grant on PSCell from the first DL slot occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$, and starts to report valid ACK/NACK for the PSCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k_1$

Where,

$T_{\text{RRCprocessingDelay}}$ = 20 ms, is the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [29];

$T_{\text{BWPSwitchDelayRRC}}$ = 6 ms, is the time used by the UE to perform BWP switch;

NR slot length = 1ms for SCS = 15kHz, and NR slot length = 0.5 ms for SCS = 30kHz.

k1 is the timing between DL data receiving and acknowledgement as specified in [12].

Which gives $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} =$

26 slots, for SCS = 15kHz,

52 slots, for SCS = 30kHz.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

4.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

4.5.6.3.0 Minimum conformance requirements

4.5.6.3.0.1 Minimum conformance requirements for Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

The delay requirements for simultaneous DCI based BWP switch on multiple CCs in this clause apply only if the timing difference among the first symbol of slot carrying DCI for all CCs is received within the MRTD for inter-band CA as defined in 38.133 [6] clause 7.6.4.

For DCI-based BWP switch on multiple CCs, after the UE receives BWP switching request, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{\text{MultipleBWPswitchDelay}}$ which starts from the beginning of DL slot n, where slot n is slot which UE receives the earliest BWP switching request among CCs on which UE is performing simultaneous DCI-based BWP switching.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{\text{MultipleBWPswitchDelay}}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on

the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths on any serving cell.

UE shall finish BWP switch within the time duration $T_{MultipleBWPswitchDelay} + Y$, which is defined as:

$$T_{MultipleBWPswitchDelay} = T_{BWPswitchDelay} + D*(N-1)$$

Where:

- $T_{BWPswitchDelay}$ is the BWP switching delay on single CC defined in 38.133 [6] Table 8.6.2-1 depending on UE capability *bwp-SwitchingDelay* [13]. $T_{BWPswitchDelay}$ shall be based on the smallest SCS among SCS of all involved CCs before and after BWP switch. If the BWP switch on multiple CCs results in the change of the SCS on any CC among involved CCs, $T_{BWPswitchDelay}$ should be based on the smallest SCS among all SCS values of all involved CCs.

- D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability *bwp-SwitchingMultiCCs-r16* [11] for switching between non-dormant BWPs, and *bwp-SwitchingMultiDormancyCCs-r16* [11] for switching between non-dormant and dormant BWPs.

- For UE which is capable of per-FR gap, and no BWP switch involves SCS change, N is the number of CCs in same FR; For UE which is not capable of per-FR gap, or the BWP switches on any CC involves SCS changing, N is the number of CCs undergoing simultaneous BWP switch.

- Y=0, if the serving cell where UE receives DCI for BWP switch is same as the serving cell on which BWP switch occurs for each involved serving cell.

  Y equals to the length of one slot at smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in 38.133 [6] Clause 8.10 in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in 38.133 [6] Clause 8.10 in the new BWP.

If the BWP switch is triggered on multiple CCs simultaneously within or outside DRX active time, and one of the two BWPs on each CC in a BWP switching is a dormant BWP [TS 38.321, 7], UE shall be able to complete active BWP switching within the time duration of

- $T_{DormantMultipleBWPswitchDelay} = T_{MultipleBWPswitchDelay}+X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, or

- $T_{DormantMultipleBWPswitchDelay} = T_{MultipleBWPswitchDelay} +X+Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where

- $T_{MultipleBWPswitchDelay}$ is defined above corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs;

- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.

- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where DCI for dormancy indication is received.

The number of CCs, N, on which the UE can simultaneously switch BWPs while still meeting the requirements, if any, related to allocations on downlink, uplink, or transmission of HARQ-ACK, depends on the UE reported capabilities related to BWP switching, the network configuration and the BWP switch method.

The delay requirements for simultaneous timer-based BWP switch on multiple CCs in this clause apply only if the timing difference among the beginning of the slot where timer based BWP switching starts for all CCs is within the MRTD for inter-band CA as defined in 38.133 [6] clause 7.6.4.

For timer-based BWP switch on multiple CCs, UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (in FR1) or DL half-subframe ((in FR2) immediately after the earliest BWP-inactivity timer *bwp-InactivityTimer* [2] expiration occurs on multiple serving cells, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n, where $T_{MultipleBWPswitchDelay}$ is defined as above.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{MultipleBWPswitchDelay}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in 38.133 [6] Clause 8.10 in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in 38.133 [6] Clause 8.10 in the new BWP.

The normative reference for this requirement is TS 38.133 [6] clause 8.6.2A.1 and clause 8.6.2B.1.

4.5.6.3.1 Simultaneous E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in EN-DC on multiple CCs

Editor's note: This test case is incomplete in following aspects:

- Test parameters are still in brackets.

4.5.6.3.1.1 Test purpose

To verify the requirement of DL BWP switch delay on multiple CCs in TS 38.133 [6] clause 8.6.2A.1, and interruption requirement for E-UTRA victim cell defined in TS 36.133 [23] clause 7.32.2.7.

4.5.6.3.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 onwards, supporting EN-DC, incremental delay for DCI and timer based active BWP switching on multiple CCs simultaneously and 2DL CA.

4.5.6.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.6.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.6.3.1.

4.5.6.3.1.4 Test description

4.5.6.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. Supported test configurations for LTE PCell and NR PSCell are shown in Table 4.5.6.3.1.4.1-1. Supported test configurations for NR SCell are shown in Table 4.5.6.3.1.4.1-2. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

Table 4.5.6.3.1.4.1-1: Supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table 4.5.6.3.1.4.1-2: Supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Configure the test equipment and the DUT according to the parameters in Table 4.5.6.3.1.4.1-3.

Table 4.5.6.3.1.4.1-3: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 4.5.6.3.1.4.1-4.

2. Message contents are defined in clause 4.5.6.3.1.4.3.

3. The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are configured according to clause C.1.2 and C.1.3.

4. By step 4 of the test procedure:

   - UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).

   - UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

   - UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.

   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.

- UE is configured with a bwp-InactivityTimer timer value for PSCell and SCell.

Table 4.5.6.3.1.4.1-4: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2,3	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
bwp-InactivityTimer	ms	[200]	For both PSCell and SCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous EN-DC
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

4.5.6.3.1.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively. All cells have constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. NR Cell 3 is added as the SCell and activated.

2. Set the parameters according to Tables 4.5.6.3.1.4.1-4, Table 4.5.6.3.1.5-1 and Table 4.5.6.3.1.5-2. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP* of NR Cell 2 and NR Cell 3. This message also configures 2 different UE-specific bandwidth parts, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB for NR Cell 2 and NR Cell 3. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to Table 4.5.6.3.1.4.3-2. UE is configured with a *bwp-InactivityTimer* timer value for PSCell (Cell 2) and SCell (Cell 3).

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1), PSCell (Cell 2) and SCell (Cell 3) to ensure that the UE will have ACK/NACK sending.

6. The SS shall send a DCI format 1_1 command on PSCell (Cell 2) to trigger PSCell DL BWP switch and a DCI format 1_1 command on SCell (Cell 2) to trigger SCell DL BWP switch. Two DCI format 1_1 commands should be sent in the same slot.

7. T1 starts from the end of the slot (denote as slot #i) in which the UE receives the DCI format 1_1 commands in PSCell and SCell, then the UE shall switch its bandwidth part from BWP-1 to BWP-2.

   If the SS observes that,

   a) the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of the DL slot ($i+T_{MultipleBWPswitchDelay}+k_1$); and

b) the UE starts to report valid ACK/NACK for SCell from the first UL slot that occurs after the beginning of the DL slot ($i+T_{MultipleBWPswitchDelay}+k_1$); and

c) the number of consecutive missing ACK/NACK for PCell is no more than 1; and

d) no missing ACK/NACK for PCell is observed from the first UL subframe that occurs after the beginning of the DL slot ($i+T_{MultipleBWPswitchDelay}+k_1$).

then count a success for the event "DCI based BWP switch" and go to step 8, otherwise count a fail for the event "DCI based BWP switch", switch off/on the UE and go to step 1.

8. T2 starts when the SS receives valid ACK/NACK for the PSCell and SCell on BWP-2. The SS stops sending PDCCHs scheduling new transmissions on PSCell and SCell.

9. T3 starts from the first slot (denoted as slot #j) of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires and the SS restarts to send PDCCHs scheduling new transmissions on PSCell and SCell. Then, the UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part - BWP-1 on PSCell and SCell.

   If the SS observes that,

   a) If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of the DL slot ($j+ T_{MultipleBWPswitchDelay} +k_1$); and

   b) If the UE starts to report valid ACK/NACK for SCell from the first UL slot that occurs after the beginning of the DL slot ($j+ T_{MultipleBWPswitchDelay} +k_1$); and

   c) If the number of consecutive missing ACK/NACK for PCell is no more than 1; and

   d) no missing ACK/NACK for PCell is observed from the first UL subframe that occurs after the beginning of the DL slot ($j+T_{MultipleBWPswitchDelay}+k_1$).

   then count a successes for the event "Timer based BWP switch" and go to step 10. Otherwise, count a fail for the event "Timer based BWP switch", switch off/on the UE and go to step 1.

10. Repeat steps 5-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved. Each of the events "DCI based BWP switch" and "Timer based BWP switch" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

4.5.6.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.6.3.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1

Table 4.5.6.3.1.4.3-2: *RRCReconfiguration* (Test procedure, step3)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 4.5.6.3.1.4.3-3	
}			
}			
}			

Table 4.5.6.3.1.4.3-3: *CellGroupConfig* (Table 4.5.6.3.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PSCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
spCellConfigDedicated	ServingCellConfig	Table 4.5.6.3.1.4.3-4	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		Entry 1	
sCellIndex	ServCellIndex of NR SCell		
sCellConfigDedicated	ServingCellConfig	Table 4.5.6.3.1.4.3-4	
}			
}			
}			

Table 4.5.6.3.1.4.3-4: *ServingCellConfig* (Table 4.5.6.3.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 4.5.6.3.1.4.3-5	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 4.5.6.3.1.4.3-5	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		

BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 4.5.6.3.1.4.3-6	
BWP-Uplink[2]	BWP-Uplink with condition BWP2	entry 2 Table 4.5.6.3.1.4.3-6	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 4.5.6.3.1.4.3-5: *BWP-Downlink* (Table 4.5.6.3.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 4.5.6.3.1.4.3-7	
}			
}			
}			

Table 4.5.6.3.1.4.3-6: BWP-Uplink (Table 4.5.6.3.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3	BWP-2	BWP2
}			
}			

Table 4.5.6.3.1.4.3-7: PDSCH-ConfigCommon (Table 4.5.6.3.1.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 4.5.6.3.1.4.3-8	
}			

Table 4.5.6.3.1.4.3-8: PDSCH-TimeDomainResourceAllocationList (Table 4.5.6.3.1.4.3-7)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	$T_{BWPswitchDelay}$	Defined in Table 4.5.6.3.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

4.5.6.3.1.5 Test requirements

Tables 4.5.6.3.1.4.1-4, 4.5.6.3.1.5-1 and 4.5.6.3.1.5-2 define the primary level settings including test tolerances.

Table 4.5.6.3.1.5-1: NR Cell specific test parameters for PSCell (NR Cell 2)

Parameter		**Unit**	**Cell 2**
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10 MHz: $N_{RB,c}$ = 52
	Config 2,5		10 MHz: $N_{RB,c}$ = 52
	Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,4		DLBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-2 Configuration	Config 1,4		DLBWP.1.3 Note 4
	Config 2,5		
	Config 3,6		

Parameter		Unit	Cell 2
Initial UL BWP Configuration	Config 1,4		ULBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-2 Configuration	Config 1,4		ULBWP.1.3 Note 4
	Config 2,5		
	Config 3,6		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2,5		CCR.1.2 TDD
	Config 3,6		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2	Config 1,2,4,5	dBm/SCS	[-104]
	Config 3,6		[-101]
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1,2,4,5	dBm/SCS	[-87]
	Config 3,6		[-90]
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	[-59]
	Config 3,6	dBm/ 38.16MHz	[-61.9]
Propagation Condition			AWGN

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].

Table 4.5.6.3.1.5-2: NR Cell specific test parameters for SCell (NR Cell 3)

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD

	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell}$ 1		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell}$ 2		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell}$ 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1,2
Initial DL BWP Configuration	$Config_{SCell}$ 1		DLBWP.0.2 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Active DL BWP-1 Configuration	$Config_{SCell}$ 1		DLBWP.1.1 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Active DL BWP-2 Configuration	$Config_{SCell}$ 1		DLBWP.1.3 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Initial UL BWP Configuration	$Config_{SCell}$ 1		ULBWP.0.2 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Active UL BWP-1 Configuration	$Config_{SCell}$ 1		ULBWP.1.1 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
Active UL BWP-2 Configuration	$Config_{SCell}$ 1		ULBWP.1.3 Note 4
	$Config_{SCell}$ 2		
	$Config_{SCell}$ 3		
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD
	$Config_{SCell}$ 2		SR.1.1 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2	$Config_{SCell}$ 1,2	dBm/SCS	[-104]
	$Config_{SCell}$ 3		[-101]
N_{oc} Note 2		dBm/15kHz	[-104]
SS-RSRP Note 3	$Config_{SCell}$ 1,2	dBm/SCS	[-87]
	$Config_{SCell}$ 3		[-90]
$\hat{E}_s/I_{ot}$		dB	[17]
$\hat{E}_s/N_{oc}$		dB	[17]
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	[-59]
	$Config_{SCell}$ 3	dBm/ 38.16MHz	[-61.9]
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

During T1, the UE shall start to send the ACK/NACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot (i+$T_{MultipleBWPswitchDelay}$+$k_1$).

During T3, the UE shall start to send the ACK/NACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot (j+$T_{MultipleBWPswitchDelay}$+$k_1$).

Where,

k_1 is the timing between PDSCHs on PSCell and SCell and their corresponding acknowledgement as specified in 38.214 [9].

$T_{MultipleBWPswitchDelay}$ = $T_{BWPswitchDelay}$ + D, is the simultaneous BWP switching delay on multiple CCs specified in TS 38.133 [6] clause 8.6.2A.1.

$T_{BWPswitchDelay}$ is the BWP switching delay on single CC defined in 38.133 [6] Table 8.6.2-1 and depends on UE UE capability *bwp-SwitchingDelay* [13].

D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability *bwp-SwitchingMultiCCs-r16* [13].

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of E-UTRA PCell interruption during PSCell active BWP switch shall not happen outside the BWP switch delay and the interruption of E-UTRA PCell shall not be longer than the interruption duration specified for active BWP switch in TS 36.133 [23] clause 7.32.2.7.

During T3, the start time of E-UTRA PCell interruption of during PSCell active BWP switch shall not happen outside the BWP switch delay and the interruption of E-UTRA PCell shall not be longer than the interruption duration specified for active BWP switch in TS 36.133 [23] clause 7.32.2.7.

All of the above test requirements shall be fulfilled in order for the observed E-UTRA PCell active BWP switch interruption to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot (i+ $T_{BWPswitchDelay}$+k_1), (j+ $T_{BWPswitchDelay}$+k_1), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

4.5.6.4 Simultaneous RRC-based active BWP switch on multiple CCs

4.5.6.4.0 Minimum conformance requirements

4.5.6.4.0.1 Minimum conformance requirements for simultaneous RRC-based BWP switch delay on multiple CCs

The requirements in this clause only apply to the case when the same type of BWP switch (RRC based BWP switch) is performed on multiple CCs simultaneously or over partially overlapping time period.

The requirements in this clause shall apply:

- Active BWP switching or parameter change of its active BWPs for SpCell

- Parameter change of its active BWPs except parameter *firstActiveDownlinkBWP-Id* and *firstActiveUplinkBWP-Id* for SCells

Requirements in this clause apply only if RRC based BWP switching on multiple CCs for NR-CA is triggered by a single RRC command.

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWPs, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}*(N-1)}{NR\ slot\ length}$slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in 38.133 [6] clause 8.6.3, and

$D_{RRC} = 0$ for UE which is capable of type 1 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [11]. $D_{RRC} = D$ for UE which is capable of type 2 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [11], where D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability [11].

N is the number of CCs within the NR-CA configured for performing simultaneous BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC} * (N-1)$ on the cells where RRC-based BWP switch occurs.

The normative reference for this requirement is TS 38.133 [6] clauses 8.6.3A and 8.6.3A.1.

4.5.6.4.0.2 Minimum conformance requirements for DCI and timer-based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with more than one BWP configurations configured.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ + Y which starts from the beginning of DL slot n, where

- Y=0, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.
- Y equals to the length of 1 slot, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. In this scenario, $T_{BWPswitchDelay}$ + Y shall follow the smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change. If both scheduling cell and scheduled cell are in FR2-2, Y shall follow the SCS of 120 KHz.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (FR1) or DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [TS 38.331] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* [TS 38.331] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [TS 38.331], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 4.5.6.4.0.2-1.

Table 4.5.6.4.0.2-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5
2	0.25	3	9
3	0.125	6	18
5	0.03125	20	65
6	0.015625	39	129
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

If the BWP switch is triggered within or outside DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321], UE shall be able to complete active BWP switching within the time duration of

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is receiveds, or

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where

- $T_{BWPswitchDelay}$ is defined in Table 4.5.6.4.0.2-1 corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs;

- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs. If both scheduling cell and scheduled cell are in FR2-2, X shall follow the SCS of 120 KHz.

- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where UE receives dormancy indication.

For DCI-based BWP switch, if the new BWP is a dormant BWP, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive CSI-RS (for DL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL slot occurs right after a time duration of $T_{dormantBWPswitchDelay}$ which starts from the beginning of DL slot n.

4.5.6.4.0.3 Minimum conformance requirements for interruption for NR victim cell

[TS38.133, Clause 8.2.1.2.15]

4.5.6.4.0.3.1 Interruptions due to SCell dormancy switch

When one SCell in SCG is switched from dormancy to non-dormancy or from non-dormancy to dormancy [TS 38.321] when UE is in DRX active time,

- the UE is allowed an interruption on active serving cell in SCG as defined in clause 8.2.1.2.7 in TS 38.133 [6], except that the interruption is allowed regardless of which parameters change between the dormant BWP and the non-dormant BWP.
- The starting time of interruption shall be within the dormancy switching delay as defined in clause 8.6.2 in TS 38.133 [6].

When multiple SCells in SCG are switched from dormancy to non-dormancy or vice versa when the UE is in DRX active time, the interruption requirement described above applies for each BWP switch.

4.5.6.4.0.3.2 Interruptions due to CQI measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of CQI measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements on dormant SCells shall not exceed 0.5%.

4.5.6.4.0.3.3 Interruptions due to RRM measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of RRM measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements on dormant SCells shall not exceed 1.0%.

4.5.6.4.0.4 Minimum conformance requirements for interruption for E-UTRA victim cell

[TS36.133, Clause 7.32.2.7]

The requirements in this clause shall apply for the UE configured with only NR PSCell or with NR PSCell and one or more NR SCells. The requirements in the section apply to the case that the BWP switch is performed on a single CC or multiple CCs.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this section apply for each BWP switch.

DCI-based or timer-based downlink BWP and/or uplink BWP switching due to change in any of the parameters listed in Table 8.2.1.2.7-2 of TS 38.133 [6] or SCS in NR PSCell or in any NR SCell may cause an interruption on PCell or on activated SCell(s) in the MCG. Interruptions are not allowed during BWP switch involving other parameter change.

Uplink BWP switching on a NR PSCell triggered by consistent uplink LBT failures on the NR PSCell may cause an interruption on PCell or on activated SCell(s) in the MCG.

The starting time of interruption due to DCI-based or timer-based downlink BWP and/or uplink BWP switching or due to uplink BWP switching on a NR PSCell triggered by consistent uplink LBT failures on the NR PSCell is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2 of TS 38.133 [6] when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ +Y as defined in clause 8.6.2A.1 of TS 38.133 [6] when DCI-based BWP switch occurs on multiple CCs. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ as defined in clause 8.6.2B.1 of TS 38.133 [6] when timer-based BWP switch occurs on multiple CCs simultaneously or $T_{MultipleBWPswitchDelayTotal}$ as defined in clause 8.6.2B.2 of TS 38.133 [6] when timer-based BWP switch occurs on multiple CCs over partially overlapping time period.

RRC-based downlink BWP and/or uplink BWP switching due to change in any of the parameters listed in Table 8.2.1.2.7-2 of TS 38.133 [6] or SCS in NR PSCell or in any NR SCell may cause an interruption on PCell or on activated SCell(s) in the MCG. Interruptions are not allowed during BWP switch involving other parameter change.

The interruption due to RRC-based downlink BWP and/or uplink BWP switching is allowed anywhere within the BWP switching delay ($T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$) defined in clause 8.6.3 of TS 38.133 [6] when BWP switch occurs on a single CC. The interruption is only allowed within the delay $T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$ + D_{RRC}*(N-1) as defined in clause 8.6.3A of TS 38.133 [6] when BWP switch occurs on multiple CCs.The interruption due to RRC-based downlink BWP and/or uplink BWP switching defined in this clause is applicable provided that:

- the RRC reconfiguration requires the UE to only switch its active BWP and

When BWP switch involves SCS changes,

the UE is allowed to cause interruption on PCell or on any activated SCell(s) regardless of the frequency range of the NR PCell or NR SCell on which the BWP switching occurs.

Otherwise,

the UE capable of per UE measurement gap [TS 36.331] is allowed to cause interruption on PCell or on any activated SCell(s) regardless of the frequency range of the NR PSCell or NR SCell on which the BWP switching occurs;

the UE capable of per FR measurement gap [TS 36.331] is allowed to cause interruption on PCell or on any activated SCell(s) provided that the NR PSCell or NR SCell on which the BWP switching occurs belongs to FR1.

The interruption on PCell or on any activated SCell(s) shall not exceed:

- 1 subframe in synchronous EN-DC,
- 2 subframes in asynchronous EN-DC.

4.5.6.4.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC on multiple CCs

Editor's note: This test case is incomplete in following aspects:

- Test parameters are still in brackets.

4.5.6.4.1.1 Test purpose

To verify the DL BWP switch delay requirement on multiple CCs for RRC-based BWP switch defined in 38.133 [6] clause 8.6.3A.1.

4.5.6.4.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 onwards, supporting EN-DC, RRC-based active BWP switching on multiple CCs simultaneously and 2DL CA.

4.5.6.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.6.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.6.4.1.

4.5.6.4.1.4 Test description

4.5.6.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. Supported test configurations for LTE PCell and NR PSCell are shown in Table 4.5.6.4.1.4.1-1. Supported test configurations for NR SCell are shown in Table 4.5.6.4.1.4.1-2. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

Table 4.5.6.4.1.4.1-1: Supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table 4.5.6.4.1.4.1-2: Supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Configure the test equipment and the DUT according to the parameters in Table 4.5.6.4.1.4.1-3.

Table 4.5.6.4.1.4.1-3: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.6.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 4.5.6.4.1.4.1-4.
2. Message contents are defined in clause 4.5.6.4.1.4.3.
3. The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are configured according to clause C.1.2 and C.1.3.

4. By step 4 of the test procedure:

   - UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
   - UE has dedicated bandwidth part BWP-1 in its RRC configuration for PSCell (Cell 2) and SCell (Cell 3)
   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell (Cell 2) and SCell (Cell 3).

Table 4.5.6.4.1.4.1-4: General test parameters

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test

NR RF Channel Number		2,3	Two NR radio channel is used for this test
Active PCell		Cell 1	Pcell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous cells
T1	s	[0.2]	

4.5.6.4.1.4.2 Test procedure

The test consists of 1 time periods with durations of T1. All cells have constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. NR Cell 3 is added as the SCell and activated.

2. Set the parameters according to Tables 4.5.6.4.1.4.1-4, Table 4.5.6.4.1.5-1 and Table 4.5.6.4.1.5-2. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall send an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP* on NR Cell 2 and NR Cell 3. This message also configures another UE-specific bandwidth part, BWP-1, and indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to the initial condition of Active BWP-1 in Table 4.5.6.4.1.5-1 and Table 4.5.6.4.1.5-2 for NR Cell 2 and NR Cell 3, respectively.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and SCell (Cell 3) to ensure that the UE will have ACK/NACK sending.

6. The SS shall send an *RRCConnectionReconfiguration* message with updated bandwidth part configuration for PSCell and SCell DL BWP switch, changing the BWP according to the final condition of Active BWP-1 in Table 4.5.6.4.1.5-1 and Table 4.5.6.4.1.5-2.

7. T1 starts from the end of the slot (denote as slot #i) in which the UE receives the RRC message reconfiguring PSCell and SCell BWP, then it reconfigures its bandwidth part with the updated bandwidth part configuration.

   If the SS observes that,

   a) the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of the DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{\text{NR slot length}} + k_1$); and

   b) the UE starts to report valid ACK/NACK for SCell from the first UL slot that occurs after the beginning of the DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{\text{NR slot length}} + k_1$),

   then count a success for the test, otherwise count a fail for the test.

8. After the SS receives the ACK/NACK in step 7) or when T1 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit

RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 8 or step 9 fails, switch off and on the UE and go to step 1.

10. Repeat steps 3-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.6.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.6.4.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1

Table 4.5.6.4.1.4.3-2: *RRCReconfiguration* (Test procedure, step 3 and step 6)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 4.5.6.4.1.4.3-3	
}			
}			
}			

Table 4.5.6.4.1.4.3-3: *CellGroupConfig* (Table 4.5.6.4.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PSCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
spCellConfigDedicated	ServingCellConfig	Table 4.5.6.4.1.4.3-4	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		Entry 1	
sCellIndex	ServCellIndex of NR SCell		
sCellConfigDedicated	ServingCellConfig	Table 4.5.6.4.1.4.3-4	
}			
}			
}			

Table 4.5.6.4.1.4.3-4: *ServingCellConfig* (Table 4.5.6.4.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		

},			
pdsch-Config CHOICE {			
release	NULL		
},			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
},			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	1 entry		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 4.5.6.4.1.4.3-5	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
},			
pusch-Config CHOICE {			
release	NULL		
},			
srs-Config CHOICE {			
release	NULL		
},			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	1 entry		
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 4.5.6.4.1.4.3-6	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 4.5.6.4.1.4.3-5: *BWP-Downlink* (Table 4.5.6.4.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 6
}			
}			

Table 4.5.6.4.1.4.3-6: BWP-Uplink (Table 4.5.6.4.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 6

}			
}			

4.5.6.4.1.5 Test requirements

Tables 4.5.6.4.1.4.1-4, 4.5.6.4.1.5-1 and 4.5.6.4.1.5-2 define the primary level settings including test tolerances.

Table 4.5.6.4.1.5-1: NR Cell specific test parameters for PSCell (NR Cell 2)

Parameter			Unit	Cell 2
Frequency Range				FR1
Duplex mode		Config 1,4		FDD
		Config 2,3,5,6		TDD
TDD configuration		Config 1,4		Not Applicable
		Config 2,5		TDDConf.1.1
		Config 3,6		TDDConf.1.2
$BW_{channel}$		Config 1,4		10 MHz: $N_{RB,c}$ = 52
		Config 2,5		10 MHz: $N_{RB,c}$ = 52
		Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID				1
Initial DL BWP Configuration		Config 1,4		DLBWP.0.2
		Config 2,5		
		Config 3,6		
Initial UL BWP Configuration		Config 1,4		ULBWP.0.2
		Config 2,5		
		Config 3,6		
Initial Condition	Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.3
		Config 2,5		
		Config 3,6		
	Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.3
		Config 2,5		
		Config 3,6		
Final Condition	Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1
		Config 2,5		
		Config 3,6		
	Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1
		Config 2,5		
		Config 3,6		
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2,5		SR.1.1 TDD
		Config 3,6		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2,5		CR.1.1 TDD
		Config 3,6		CR2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.1 FDD
		Config 2,5		CCR.1.1 TDD
		Config 3,6		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4,5		SSB.1 FR1
		Config 3,6		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2,5		TRS.1.1 TDD
		Config 3,6		TRS.1.2 TDD
Antenna Configuration				1x2
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				

EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	[-104]
SS-RSRP Note 3		dBm/15 kHz	[-87]
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/ 9.36MHz	[-59]
	Config 3,6	dBm/ 38.16MHz	[-61.9]

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table 4.5.6.4.1.5-2: NR Cell specific test parameters for SCell (NR Cell 3)

Parameter			Unit	Cell 3
Frequency Range				FR1
Duplex mode		$Config_{SCell}$ 1		FDD
		$Config_{SCell}$ 2,3		TDD
TDD configuration		$Config_{SCell}$ 1		Not Applicable
		$Config_{SCell}$ 2		TDDConf.1.1
		$Config_{SCell}$ 3		TDDConf.1.2
$BW_{channel}$		$Config_{SCell}$ 1		10 MHz: $N_{RB,c}$ = 52
		$Config_{SCell}$ 2		10 MHz: $N_{RB,c}$ = 52
		$Config_{SCell}$ 3		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID				1
Initial DL BWP Configuration		$Config_{SCell}$ 1		DLBWP.0.2
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
Initial UL BWP Configuration		$Config_{SCell}$ 1		ULBWP.0.2
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
Initial Condition	Active DL BWP-1 Configuration	$Config_{SCell}$ 1		DLBWP.1.3
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
	Active UL BWP-1 Configuration	$Config_{SCell}$ 1		ULBWP.1.3
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
Final Condition	Active DL BWP-1 Configuration	$Config_{SCell}$ 1		DLBWP.1.1
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
	Active UL BWP-1 Configuration	$Config_{SCell}$ 1		ULBWP.1.1
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
PDSCH Reference measurement channel		$Config_{SCell}$ 1		SR.1.1 FDD
		$Config_{SCell}$ 2		SR.1.1 TDD
		$Config_{SCell}$ 3		SR2.1 TDD
RMSI CORESET parameters		$Config_{SCell}$ 1		CR.1.1 FDD
		$Config_{SCell}$ 2		CR.1.1 TDD
		$Config_{SCell}$ 3		CR2.1 TDD
Dedicated CORESET parameters		$Config_{SCell}$ 1		CCR.1.1 FDD
		$Config_{SCell}$ 2		CCR.1.1 TDD
		$Config_{SCell}$ 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		$Config_{SCell}$ 1,2		SSB.1 FR1
		$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		$Config_{SCell}$ 1		TRS.1.1 FDD

	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	[-104]
SS-RSRP Note 3		dBm/15 kHz	[-87]
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	[-59]
	$Config_{SCell}$ 3	dBm/ 38.16MHz	[-61.9]
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

During T1, the UE shall start to send the ACK/NACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{\text{NR slot length}} + k_1)$.

where,

k_1 is the timing between PDSCHs on PSCell and SCell and their corresponding acknowledgement as specified in 38.214 [9].

$T_{RRCprocessingDelay} = 20$ ms, is the length of the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [29],

$T_{BWPswitchDelayRRC} = 6$ ms, is the time used by the UE to perform BWP switch as defined in 38.133 [6] clause 8.6.3,

$D_{RRC} = 0$ if the UE is capable of type 1 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [11]. $D_{RRC} = D$ for UE which is capable of type 2 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [2]

D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability *bwp-SwitchingMultiCCs-r16* [13].

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

4.5.6.5 SCell dormancy switch

4.5.7 PSCell addition and release delay

4.5.7.0 Minimum conformance requirements

4.5.7.0.1 NR PSCell Addition Delay Requirement

The requirements in this section shall apply for the UE which is configured with PCell, and may also be configured with one or more SCells.

Upon receiving NR PSCell addition in subframe *n*, the UE shall be capable to transmit PRACH preamble towards NR PSCell no later than in subframe $n + T_{config\ PSCell}$:

Where:

$T_{config_PSCell} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{PSCell_DU} + 2$ ms

T_{RRC_delay} is the RRC procedure delay as specified in TS 36.331 [29].

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period. $T_{processing}$ = 20 ms if NR PSCell is in FR1, $T_{processing}$ = 40 ms if NR PSCell is in FR2.

T_{search} is the time for AGC settling and PSS/SSS detection.

- For NR PSCell in FR1: if the target cell is a known cell, T_{search} = 0 ms. If the target cell is an unknown cell and the target cell Es/Iot ≥ -2 dB, then T_{search} = 3* Trs ms;
- For NR PSCell in FR2: if the target cell is a known cell, T_{search} = 0 ms. If the target cell is an unknown cell and the target cell Es/Iot ≥ -2 dB, then T_{search} = 24* Trs ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = 1*Trs ms for a known or unknown PSCell.

T_{PSCell_DU} is the delay uncertainty in acquiring the first available PRACH occasion in the NR PSCell. T_{PSCell_DU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [8].

Trs is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this section is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

In FR1 and FR2, the NR PSCell is known if it has been meeting the following conditions:

During the last 5 seconds before the reception of the NR PSCell configuration command:

- the UE has sent a valid measurement report for the NR PSCell being configured and
- One of the SSBs measured from the NR PSCell being configured remains detectable according to the cell identification conditions specified in section 9.3 of TS 38.133 [6],

- One of the SSBs measured from NR PSCell being configured also remains detectable during the NR PSCell configuration delay according to the cell identification conditions specified in section 9.3 of TS 38.133 [6].

otherwise it is unknown.

The PCell interruption specified in section 7.32 is allowed only during the RRC reconfiguration procedure TS 36.331 [29].

4.5.7.0.2 NR PSCell Release Delay Requirement

The requirements in this section shall apply for a UE which is configured with PCell and NR PSCell, and may also be configured with one or more SCells and/or NR SCells.

Upon receiving NR PSCell release in subframe *n*, the UE shall accomplish the release actions specified in TS 36.331 [29] no later than in subframe $n + T_{RRC_delay}$:

Where

T_{RRC_delay} is the RRC procedure delay as specified in TS 36.331 [29].

The PCell interruption specified in section 7.32 is allowed only during the RRC reconfiguration procedure TS 36.331 [29].

4.5.7.1 EN-DC FR1 addition and release delay of known PSCell

4.5.7.1.1 Test purpose

The purpose of this test is to verify that the PSCell addition and release delay for an NR PSCell is within the specified limits and the CSI transmissions are according to the requirements.

4.5.7.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.5.7.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.7.0.1 and 4.5.7.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.7.1.

4.5.7.1.4 Test description

4.5.7.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.7.1.4.1-1.

Table 4.5.7.1.4.1-1: Test configurations

Test Case ID	Description
4.5.7.1-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.5.7.1-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.5.7.1-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.5.7.1-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.5.7.1-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.5.7.1-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.5.7.1.4.1-2.

Table 4.5.7.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.7.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.5.7.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell. Cell 2 is the PSCell. The connection setup is done according to the settings in clause C.1.1.

3 Common test parameters are defined in Table 4.5.7.1.4.1-3.

Table 4.5.7.1.4.1-3: General Test Parameters for PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-96	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	S	0	
DRX			OFF	Continuous monitoring of primary cell
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
PRACH configuration on cell2			FR1 PRACH configuration 1	Captured in A.3.8.2.1
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	1.5	During this time the UE shall identify neighbour cell (cell2) and report event B1.
T3		s	3	During this time the test system transmits the RRC messages to release measurement gap and add PSCell.
T4		s	0.5	During this time the UE adds the PSCell.
T5		s	0.5	During this time the UE sends CSI reports for PSCell.
T6		s	0.5	During this time the UE releases the PSCell.

4.5.7.1.4.2 Test procedure

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall set the parameters according to Table 4.5.7.1.5-1 as appropriate. T1 starts.

3. The SS shall transmit an *RRCConnectionReconfiguration message* with event B1 configured.

4. The UE shall transmit an RRCConnectionReconfigurationComplete message.

5. When T1 expires, the SS shall set T2 parameters according to Table 4.5.7.1.5-1 as appropriate. T2 starts.

6. The UE shall transmit a *MeasurementReport* message triggered by Event B1 for Cell 2 no later than 1.5s from the start of T2.

7. The SS shall transmit an *RRCConnectionReconfiguration* message to release measurement gap. T3 starts.
8. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
9. During T3 the SS then shall transmit *RRCConnectionReconfiguration* message with condition *MCG_and_SCG* according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). T4 starts from the instant when the SS sends the last TTI containing the RRC message.
10. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
11. The UE shall send a PRACH to PSCell during T4. The UE shall send PRACH no later than 82ms from the start of T4, otherwise increase the number of failed iterations by one, switch off the UE and continue with step 17.
12. T5 starts.
13. During T5 the UE shall send at least one CSI report for PSCell with non-zero CQI index, otherwise increase the number of failed iterations by one, switch off the UE and continue to step 17.
14. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell) after the UE has send at least one CQI report with non-zero CQI index for PSCell (Cell 2). T6 starts from the instant when the SS sends the last TTI containing the RRC message.
15. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
16. The UE shall stop sending CSI reports for PSCell no later than 20ms from the start of T6, if so increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.
17. Set Cell 2 physical cell identity = [((current cell 2 physical cell identity + 1) mod 1008)] for next iteration of the test procedure loop.
18. If the UE is not switched off, the SS shall transmit an RRCConnectionRelease message to release the RRC connection then, the SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State E-UTRA RRC_CONNECTED with generic parameter Connectivity E-UTRA/EPC. If paging succeeds, go to step 20, otherwise switches off the UE.
19. Switches on the UE and ensures the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
20. Repeat step 2-19 until a test verdict has been achieved.

4.5.7.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.7.1.4.3-1: Common exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 for step 3 Table H.3.4-1 for step 6. Table H.3.4-4 with condition INTER-RAT NR and EVENT B1 Table H.3.4-5 with condition Pattern#0
Specific message contents exceptions for Test Configuration 4.5.7.1-1, 4.5.7.1-2, 4.5.7.1-4, 4.5.7.1-5	Table H.3.4-6 with condition SMTC.1 and SSB.1 FR1
Specific message contents exceptions for Test Configuration 4.5.7.1-3, 4.5.7.1-6	Table H.3.4-6 with condition SMTC.1 and SSB.2 FR1

Table 4.5.7.1.4.3-2: Void

Table 4.5.7.1.4.3-3: Void

4.5.7.1.5 Test requirements

Table 4.5.7.1.5-1 defines the primary level settings including test tolerances.

Table 4.5.7.1.5-1: Cell Specific Parameters for PSCell Addition and Release

Parameter	Unit	Config	Test					
			T1	T2	T3	T4	T5	T6
E-UTRA RF Channel Number		1,2,3,4,5,6	1					
NR RF Channel Number		1,2,3,4,5,6	2					
TDD configuration		1,4	Not Applicable					
		2,5	TDDConf.1.1					
		3,6	TDDConf.2.1					
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52					
		2,5	10: $N_{RB,c}$ = 52					
		3,6	40: $N_{RB,c}$ = 106					
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1					
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1					
PDSCH Reference measurement channel		1,4	SR.1.1 FDD					
		2,5	SR.1.1 TDD					
		3,6	SR.2.1 TDD					
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD					
		2,5	CR.1.1 TDD					
		3,6	CR.2.1 TDD					
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD					
		2,5	CCR.1.1 TDD					
		3,6	CCR.2.1 TDD					
OCNG Patterns		1,2,3,4,5,6	OP.1					
SSB configuration		1,2,4,5	SSB.1 FR1					
		3,6	SSB.2 FR1					
SMTC configuration		1,2,4,5	SMTC.1					
		3,6	SMTC.1					
TRS Configuration		1,4	TRS.1.1 FDD					
		2,5	TRS.1.1 TDD					
		3,6	TRS.1.2 TDD					
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD					
		2,5	CSI-RS.1.1 TDD					
		3,6	CSI-RS.2.1 TDD					
reportConfigType		1,2,3,4,5,6	periodic					
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI					
CSI reporting periodicity	slot	1,2,4,5	5					
		3,6	10					
CSI reporting offset	slot	1,2,4,5	2					
		3,6	4					
EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								

Parameter	Unit	Config	Test					
			T1	T2	T3	T4	T5	T6
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15 kHz	1,2,4,5	N/A	-85				
		3,6	N/A	-89				
N_{oc} Note2	dBm/SCS	1,2,4,5	N/A	-85				
		3,6	N/A	-86				
$\hat{E}_s / I_{ot}$		1,2,3,4,5,6	-infinity	0				
$\hat{E}_s / N_{oc}$		1,2,3,4,5,6	-infinity	0				
SS-RSRP Note3	dBm/SCS	1,2,4,5	-infinity	-85				
		3,6	-infinity	-86				
Io Note3	dBm/9.36MHz	1,2,4,5	N/A	-54				
	dBm/38.1MHz	3,6	N/A	-51.9				
Propagation condition		1,2,3,4,5,6	AWGN					

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall transmit the PRACH to PSCell no later than 82 ms Note1 from the start of T4.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T5.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T5.

The UE shall stop sending CSI reports for PSCell no later than 20ms from the start of T6.

All the above test requirements shall be fulfilled in order for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

NOTE: The PSCell addition delay can be expressed as follows as specified in clause 4.7.5.0.1:

$$T_{config_PSCell} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{PSCell_DU} + 2ms$$

Where:

T_{RRC_delay} = 20ms

$T_{processing}$ = 20ms

T_{search} = 0

T_{Δ} = 20ms

T_{PSCell_DU} = 1*10+10 = 20ms

4.5.8 UL switching

4.5.8.0 Minimum conformance requirements

[TS 38.133, clause 8.2.1.2.14]

The DL interruption requirements at dynamic switching between two uplink carriers specified in this clause are applicable for an uplink band pair of an inter-band EN-DC configuration when the capability *uplinkTxSwitchingPeriod* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [9], where E-UTRA UL carrier is capable of one transmit antenna connector and NR UL carrier is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

When dynamic switching between two uplink carriers is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [13]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in NR carrier. The DL interruption lengths of X for NR carrier(s) are defined in Table 4.5.8.0-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band EN-DC configurations as specified in clause 5.5B.4 of TS 38.101-3 [4].

Table 4.5.8.0-1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period Note1	
		35us	140us
0	1	2	3
1	0.5	3	6
2	0.25	4	10
Note 1: Uplink Tx switching period depends on UE capability *uplinkTxSwitchingPeriod.*			

4.5.8.1 EN-DC FR1 interruptions at switching between two uplink carriers

4.5.8.1.1 Test purpose

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers. The test case is applicable for an uplink band pair of an inter-band EN-DC configuration when the capability *uplinkTxSwitchingPeriod* is present.

4.5.8.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards supporting dynamic UL Tx switching in case of inter-band EN-DC.

4.5.8.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.8.0.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.8.

4.5.8.1.4 Test description

4.5.8.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.8.1.4.1-1.

Table 4.5.8.1.4.1-1: Test configurations

Test Case ID	PSCell (Cell2)
4.5.8.1-1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 4.5.8.1.4.1-2.

Table 4.5.8.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.8.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.5.8.1.4.1-3
2. Message contents are defined in clause 4.5.8.1.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell. Cell 2 is the PSCell. The connection setup is done according to the settings in Annex C.1.1.

Table 4.5.8.1.4.1-3: General Test Parameters for DL Interruptions at switching between two uplink carriers in EN-DC

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for the test.
Active cell		Config 1	Cell 1: E-UTRAN FDD PCell Cell 2: FR1 PSCell	E-UTRAN FDD PCell on RF channel number 1 FR1 PSCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	CSI-RS.2.5 TDD	
T1	s	Config 1	5	

4.5.8.1.4.2 Test procedure

The test consists of two cells: Cell1 and Cell2. Cell1 is E-UTRAN PCell, Cell2 is NR FR1 PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell1 and Cell2 and *uplinkTxSwitching* is indicated to the UE.

UE is configured to transmit SRS on PSCell on the last 2 symbols of special slot. DL interruption is expected to take place prior of the SRS symbols.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG_and_SCG, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.

2. Configure MCG according to TS 36.521-3 [26] Annex C.0, C.1 and SCG according to Annex C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall transmit an RRCConnectionReconfiguration message to configure PCell (Cell1) and PSCell (Cell2) on the MCG and SCG as per TS 36.508 [7] clause 4.6 with the message content exceptions defined in clause 4.5.8.1.4.3. *UplinkTxSwitching* is configured to the UE.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

5. Set the parameters according to T1 in Tables 4.5.8.1.5-1. T1 starts.

6. SS schedules UL transmission on PCell continuously on the subframes which only overlap with DL slots of PSCell.

7. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting (6dB) on following symbol on the 1st special slot on of every radio frame PSCell.

   - symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

   - otherwise,

     - symbol#5 if UE capability uplinkTxSwitchingPeriod is 140us or

     - symbol #8 if UE capability uplinkTxSwitchingPeriod is 35us.

8. The UE shall send L1-RSRP report containing L1-RSRP of CSI-RS#0 after the reception of DCI trigger while meeting the test requirements given in Table 4.5.8.1.5-3, if so increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

10. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

11. If any of the reconfigurations fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

12. Repeat step 3-11 until a test verdict has been achieved.

4.5.8.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.8.1.4.3-1: Common exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-1 with condition 1T-2T, and sCellToAddModList = Not present; Table H.3.11-3 with condition 1T-2T, and uplinkTxSwitchingPeriodLocation-r16 = true; Table H.3.11-4 with condition 2TX and SwitchTo, and c-SRS = 0; Table H.3.11-11

Table 4.5.8.1.4.3-2 - Table 4.5.8.1.4.3-5: Void

Table 4.5.8.1.4.3-6: *CSI-MeasConfig*

Derivation Path: Table H.3.11-5			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-MeasConfig::= SEQUENCE {			
csi-ReportConfigToAddModList SEQUENCE (SIZE (1..maxNrofCSI-ReportConfigurations)) OF CSI-ReportConfig {	1 entry		
CSI-ReportConfig[1]	CSI-ReportConfig	entry 1 Table 4.5.8.1.4.3-9	
}			
reportTriggerSize	1		
aperiodicTriggerStateList CHOICE {			
setup	CSI-AperiodicTriggerStateList	Table H.3.11-10	
}			
}			

Table 4.5.8.1.4.3-7 - Table 4.5.8.1.4.3-8: *Void*

Table 4.5.8.1.4.3-9: *CSI-ReportConfig*

Derivation Path: TS 38.508-1 [14], Table H.3.11-9			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ReportConfig ::= SEQUENCE {			
reportConfigId	0		
carrier	Not present		
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList SEQUENCE (SIZE (1..maxNrofUL-Allocations)) OF INTEGER {			
INTEGER	4		
}			
}			
}			
}			

Table 4.5.8.1.4.3-10: CSI-AperiodicTriggerStateList (Table 4.5.8.1.4.3-6)

Derivation Path: TS 38.508-1 [14] Table 7.3.1-12J			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-AperiodicTriggerStateList ::= SEQUENCE (SIZE (1..maxNrOfCSI-AperiodicTriggers)) OF CSI-AperiodicTriggerState {	1 entries		
CSI-AperiodicTriggerState[1] SEQUENCE {		entry 1	
associatedReportConfigInfoList SEQUENCE (SIZE(1..maxNrofReportConfigPerAperiodicTrigger)) OF CSI-AssociatedReportConfigInfo {	1 entry		
CSI-AssociatedReportConfigInfo[1] SEQUENCE {		entry 1	
reportConfigId	0		
resourcesForChannel CHOICE {			
nzp-CSI-RS SEQUENCE {			
resourceSet	0		
qcl-info SEQUENCE (SIZE(1..maxNrofAP-CSI-RS-ResourcesPerSet)) OF TCI-StateId {	1 entry		
TCI-StateId[1]	0	QCL to SSB #0	
}			

}			
}			
}			
}			
}			

Table 4.5.8.1.4.3-11: Physical layer parameters for DCI format 0_1 (Test procedure, step 7)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

4.5.8.1.5 Test requirements

Table 4.5.8.1.5-1 defines the NR cell specific primary level settings including test tolerances for E-UTRAN – NR FR1 interruptions at switching between two uplink carriers.

Table 4.5.8.1.5-1: NR Cell specific test parameters for DL Interruptions at switching between two uplink carriers in EN-DC (Cell 2)

Parameter		**Unit**	**Cell2**
Frequency Range			FR1
Duplex mode	Config 1		TDD
TDD configuration	Config 1		TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11* *nrofUplinkSymbols: 2*
$BW_{channel}$	Config 1		40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL dedicated BWP configuration			ULBWP.1.1
SRS configuration			SRSConf.4 in Table 4.5.8.1.5-2
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD
RMSI CORESET parameters	Confiq 1		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
SSB Configuration	Config 1		SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/SCS	84
$\hat{E}_s/I_{ot}$		dB	14

$\hat{E}_s/N_{oc}$		dB	14
N_{oc} Note 2	Config 1	dBm/SCS	-101
Io Note3	Config 1	dBm/ 38.16MHz	-55.78
Time offset to Cell1 Note 5		µs	0
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Table 4.5.8.1.5-2: SRS Configuration for DL Interruptions at switching between two uplink carriers

	Field	SRSConf.4	Comments
SRS-ResourceSet	srs-ResourceSetId	0	
	srs-ResourceIdList	0	
	resourceType	Periodic	
	Usage	Codebook	
SRS-Resource	SRS-ResourceId	0	
	nrofSRS-Ports	Port2	
	transmissionComb	n2	
	combOffset-n2	0	
	cyclicShift-n2	0	
	resourceMapping startPosition	1	
	resourceMapping nrofSymbols	n2	
	resourceMapping repetitionFactor	n1	
	freqDomainPosition	0	
	freqDomainShift	0	
	freqHopping c-SRS	0	Matches $N_{RB,c}$
	freqHopping b-SRS	0	
	freqHopping b-hop	0	
	groupOrSequenceHopping	Neither	
	resourceType	Periodic	
	periodicityAndOffset-p	sl20, 3	
	sequenceId	0	

The UE shall send L1-RSRP report for Cell 2 after the reception of DCI trigger. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 4.5.8.1.5-3.

Table 4.5.8.1.5-3: L1-RSRP absolute accuracy requirements for the reported values

Normal Conditions	T1
Lowest reported value (CSI-RS#0)	65
Highest reported value (CSI-RS#0)	86

The rate of correct events observed during repeated tests shall be at least 90%.

4.5.9 UE specific CBW change

4.5.9.0 Minimum conformance requirements

4.5.9.0.1 Minimum conformance requirements for UE specific CBW change delay

[TS38.133, Clause 8.13.2]

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on the DL BWP with BWP ID firstActiveDownlinkBWP-Id or transmit PUSCH on the UL BWP with BWP ID firstActiveUplinkBWP-Id of the new CBW right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in millisecond as defined in clause 11.2 in TS 36.331 [29] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in millisecond as defined in clause 12 in TS 38.331 [13], and

$T_{CBWchangeDelayRRC} = 6ms$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ on the cell where UE-specific CBW change occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed, where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

4.5.9.1 UE specific CBW change on FR1 NR PSCell with non-DRX in synchronous EN-DC

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing

4.5.9.1.1 Test purpose

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13 in TS 38.133 [6].

4.5.9.1.2 Test applicability

This test applies to all types of EN-DC UE Rel-16 and forward supporting EN-DC with PSCell in FR1. The requirements in this test apply for a UE which receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

4.5.9.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.9.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.5.9.1.

4.5.9.1.4 Test description

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table 4.5.9.1.4.1-3. All cells have constant signal levels throughout the test. The test consists of 1 time period, with duration of T1.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

During T1 the SS sends an *RRCReconfiguration* message containing *SCS-SpecificCarrier* to reconfigure UE-specific CBW. The SS verifies the UE specific CBW switching delay in PSCell by estimating the time from the moment the

RRCReconfiguration message including updated UE-specific CBW configuration is sent to the moment a valid ACK/NACK is received (RRC Reconfiguration Complete message).

4.5.9.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.9.1.4.1-1.

Table 4.5.9.1.4.1-1: UE specific CBW change supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 4.5.9.1.4.1-2.

Table 4.5.9.1.4.1-2: Initial conditions for EN-DC PSCell FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.9.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.1.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.2.3.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.5.9.1.4.1-3. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 in TS 38.133 [6], cell-specific parameters of NR PSCell are specified in Table 4.5.9.1.5-1 below.

2. Message contents are defined in clause 4.5.9.1.4.3.

3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 4.5.9.1.4.1-3: General test parameters for UE specific CBW change in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	0.2	

4.5.9.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4. UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC). UE has been configured via RRC-configuration (*SCS-SpecificCarrier* in TS 38.331 [13]) with UE specific CBW (CBW-1), initial BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP in PSCell. Set the parameters according to Tables 4.5.9.1.4.1-3 and 4.5.9.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.
2. The SS starts sending PDCCHs indicating new transmissions continuously on Cell 2.
3. The SS sends an *RRCReconfiguration* message containing *SCS-SpecificCarrier* with updated UE specific CBW (CBW-2), dedicated BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP.
4. T1 starts from the beginning of slot *i*, where slot *i* is the last slot carrying the PDSCH containing the *RRCReconfiguration* message in step 3.
5. The UE shall reconfigure its CBW with the updated CBW of final condition (CBW-2).
6. The SS verifies the UE specific CBW change time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated CBW configuration is sent till the time when RRC Reconfiguration Complete message is received.
7. If the UE starts to report valid ACK/NACK for the PSCell from the first UL slot that occurs after the beginning of DL slot ($i+ \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$) then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
8. If it is successful, continue to step 10. Otherwise continue to step 9.
9. Switch the UE OFF and then ON. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
10. Repeat steps 2-9 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.9.1.4.3 Message contents

TBD

4.5.9.1.5 Test requirement

Table 4.5.9.1.5-1 defines the primary level settings for all tests.

4.5.9.1.5-1: NR Cell specific test parameters for UE specific CBW change in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			**FR1**
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.1.2
$BW_{channel}$	Config 1,4		10 MHz: $N_{RB,c}$ = 52
	Config 2,5		10 MHz: $N_{RB,c}$ = 52
	Config 3,6		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID			0
Initial DL BWP Configuration (BWP-1) before and after UE specific CBW change	Config 1,4		DLBWP.0.2
	Config 2,5		
	Config 3,6		
Initial UL BWP (BWP-1)	Config 1,4		ULBWP.0.2

Configuration before and after UE specific CBW change		Config 2,5		
		Config 3,6		
Initial Condition	Active DL CBW Configuration (CBW-1)	Config 1,4		DLCBW.1.1
		Config 2,5		
		Config 3,6		
	Active UL CBW Configuration (CBW-1)	Config 1,4		ULCBW.1.1
		Config 2,5		
		Config 3,6		
Final Condition	Active DL CBW Configuration (CBW-2)	Config 1,4		DLCBW.1.2
		Config 2,5		
		Config 3,6		
	Active UL CBW Configuration (CBW-2)	Config 1,4		ULCBW.1.2
		Config 2,5		
		Config 3,6		
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2,5		SR.1.1 TDD
		Config 3,6		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2,5		CR.1.1 TDD
		Config 3,6		CR2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.1 FDD
		Config 2,5		CCR.1.1 TDD
		Config 3,6		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4,5		SSB.1 FR1
		Config 3,6		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2,5		TRS.1.1 TDD
		Config 3,6		TRS.1.2 TDD
Antenna Configuration				1x2 low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2			dBm/15 kHz	-104
SS-RSRP Note 3			dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
Io Note3		Config 1,2,4,5	dBm/9.36MHz	-58.96
		Config 3,6	dBm/38.16MHz	-52.86

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot ($i+ \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$).

All of the above test requirements shall be fulfilled in order for the observed PSCell UE specific CBW change delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

4.5.10 PSCell activation and deactivation delay

4.5.10.0 Minimum conformance requirements

4.5.10.0.1 Minimum conformance requirements for PSCell activation and deactivation delay

[TS 36.133, clause 7.38]

The requirements in this clause shall apply for the UE configured with one deactivated SCG in EN-DC, and when PScell in one SCG is being activated.

The delay within which the UE shall be able to activate the deactivated SCG depends upon the specified conditions.

Upon receiving SCG activation command in slot *n*, the UE shall be capable to transmit PRACH preamble or PUCCH towards PSCell no later than in slot n + $\frac{T_{activation_time}}{NR\ slot\ length}$,

where:

$T_{activation_time} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2$ ms

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [13].

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period. When PSCell is activated from deactivated state, if any PSCell parameter is modified, $T_{processing}$ = [20ms]. Otherwise, $T_{processing}$ = [5 or 10ms].

T_{search} is the time for AGC settling and PSS/SSS detection.

For RACH based PSCell activation, if the target cell is a known NR FR1 or FR2 PScell, T_{search} = 0 ms. If the target cell is an unknown FR1 PScell and Es/Iot ≥ -2 dB, T_{search} = 3* T_{rs} ms. If the target cell is an unknown FR2 PScell and Es/Iot ≥ -2 dB, then T_{search} = 24* T_{rs} ms.

For RACH-less based PSCell activation, if RLM and BFD are configured and no failure is detected, T_{search} = 0 ms if the target cell is a known FR2 PScell. There are no requirements if PSCell is unknown.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target PSCell. T_{Δ} = 1*Trs ms.

T_{IU}: When RACH based PSCell activation is configured, it is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{IU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [8].

When RACH-less based PSCell activation is configured, it is the uncertainty in acquiring the first PUSCH transmission occasion [or SR on PUCCH].

Trs is the SMTC periodicity of the PScell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5.

In FR1 and FR2, the PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the SCG activation command:
  - the UE has sent a valid measurement report for the PSCell being activated and
  - One of the SSBs measured from the PSCell being activated remains detectable according to the cell identification conditions specified in clause 9.3.
- One of the SSBs measured from PSCell being activated also remains detectable during the PSCell activation delay T_{config_PSCell} according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [13].

The requirements in this clause shall apply for a UE which is configured with at least PCell and PSCell.

Upon receiving SCG deactivation command in subframe n, the UE shall accomplish the deactivation actions specified in TS 38.331 [13] no later than in slot $n + \frac{T_{RRC_delay}}{\text{NR slot length}}$:

where

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [13].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [13].

FFS: MAC CE based SCG deactivation delay requirements.

The normative reference for this requirement is TS 36.133 [23] clause 7.38.2 and 7.38.3.

4.5.10.1 EN-DC FR1 PSCell activation and deactivation delay

4.5.10.1.1 Test purpose

This test is to verify that the NR PSCell activation and deactivation delay under EN-DC are within the requirements, for the case when UE configured with one deactivated SCG and when PScell in one SCG is being activated where the PSCell is known by the UE at the time of activation.

4.5.10.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 17 onwards and supporting activation and deactivation on SCG.

4.5.10.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.10.0.1.

The normative reference for this requirement is TS 36.133 [23] 7.38 and TS 38.133 [6] clause A.4.5.10.1.

4.5.10.1.4 Test description

4.5.10.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.10.1.4.1-1.

Table 4.5.10.1.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
4.5.10.1-1	LTE FDD, NR SCS 15 kHz, BW 10 MHz, FDD
4.5.10.1-2	LTE FDD, NR SCS 15 kHz, BW 10 MHz, TDD
4.5.10.1-3	LTE FDD, NR SCS 30 kHz, BW 40 MHz, TDD
4.5.10.1-4	LTE TDD, NR SCS 15 kHz, BW 10 MHz, FDD
4.5.10.1-5	LTE TDD, NR SCS 15 kHz, BW 10 MHz, TDD
4.5.10.1-6	LTE TDD, NR SCS 30 kHz, BW 40 MHz, TDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 4.5.10.1.4.1-2 and Table 4.5.10.1.4.1-3.

Table 4.5.10.1.4.1-2: Initial conditions for PSCell activation and deactivation

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.10.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

Table 4.5.10.1.4.1-3: General Test Parameters for PSCell activation and deactivation

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	To be activated PSCell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	PSCell deactivated on RF channel number 2.
DRX			OFF	Continuous monitoring of primary cell
Scheduling request resource periodicity			20ms	At the starting of period T3, UE sends a SR on PUCCH for PSCell
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	1	During this time the UE adds the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.
T4		s	1	During this time the UE releases the PSCell.

1. Message contents are defined in clause 4.5.10.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 cells. Cell 2 is the deactivated PSCell.

4.5.10.1.4.2 Test procedure

The test consists of four successive time periods with duration of T1, T2, T3 and T4. There are two carriers each with one cell. The UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) and PSCell (Cell2) is in deactivated state. During T1, both Cell1 and Cell2 are known to UE and UE performs measurement on deactivated PCell. Before the test starts the UE is configured RLM and BFD on deactivated PSCell. During T1, UE performs RLM and BFD on the deactivated PSCell and TCI state is known.

The test system shall send a RRC message to the UE to activate PSCell (Cell 2) on radio channel 2, where no any PSCell parameter is modified in the RRC message. The RRC message (to activate PSCell) also includes a request for the UE to transmit scheduling request on PUCCH for the PSCell after the PSCell has been successfully activated. The RRC message to activate PSCell shall be sent to the UE during period T1. The point in time at which the RRC message to activate PSCell (Cell2) is received at the UE antenna connector defines the start of period T2.

The test system shall observe the periodic reporting of CSI for PSCell during T3. The point in time at which the UE has sent scheduling request on PUCCH for PSCell (Cell 2) defines the start of period T3.

The test system shall send a RRC message to the UE to deactivate PSCell (Cell 2) on radio channel 2. The RRC message to deactivate PSCell (Cell2) shall be sent to the UE during period T3, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to deactivate PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 4.5.10.1.5-1 and A.6.1.1-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall transmit RRCConnectionReconfiguration message with condition DeactivatedSCG according to TS 36.508 [25] Table 4.6.1-8 to deactivate NR cell (PSCell).

3a. The UE shall transmit RRCConnectionReconfigurationComplete message. After 1s, the SS should transmit *RRCConnectionReconfiguration* message to activate PSCell. T2 starts.

4. The UE shall send SR on PUCCH for PSCell no later than 65ms from the start of T2, otherwise increase the number of failed iterations by one, switch off the UE and continue with step 10.

5. T3 starts.

6. During T3 the UE shall send at least one CSI report for PSCell with non-zero CQI index, otherwise increase the number of failed iterations by one, switch off the UE and continue to step 10.

7. The SS shall transmit RRCConnectionReconfiguration message with condition DeactivatedSCG according to TS 36.508 [25] Table 4.6.1-8 to deactivate PSCell after the UE has send at least one CQI report with non-zero CQI index for PSCell (Cell 2) during T3.

8. The UE shall transmit an RRCConnectionReconfigurationComplete message. T4 stars.

9. The UE shall stop sending PUSCH for PSCell no later than 20ms into T4, if so increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.

10. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for the next iteration of the test procedure loop.

11. If the UE is not switched off, the SS shall transmit an RRCConnectionRelease message to release the RRC connection then, the SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State E-UTRA RRC_CONNECTED with generic parameter Connectivity E-UTRA/EPC. If paging succeeds, go to step 13, otherwise switches off the UE.

12. Switches on the UE and ensures the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters Connectivity E-UTRA/EPC with Test Mode On according to TS 38.508-1 [14] clause 4.5.

13. Repeat step 2-12 until a test verdict has been achieved.

4.5.10.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3 with following exceptions:

Table 4.5.10.1.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-8 with Condition SSB BFD Table H.3.1-8 with Condition SSB RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1 Table 4.6.3-19 in TS 38.508-1 [14] with condition RLM_BFD_PSCell Table 4.6.3-167 in TS 38.508-1 [14] with condition SCG_Activate
Specific message contents exceptions for Test Configuration 4.5.10.1-1, 4.5.10.1-2, 4.5.10.1-4, 4.5.10.1-5	Table H.3.1-3 with condition SSB.1 FR1 and SMTC.1
Specific message contents exceptions for Test Configuration 4.5.10.1-3, 4.5.10.1-6	Table H.3.1-3 with condition SSB.2 FR1 and SMTC.1

Table 4.5.10.1.4.3-2: *SchedulingRequestResourceConfig*

Derivation Path: TS 38.508-1 [14], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequestResourceConfig ::= SEQUENCE {			
schedulingRequestResourceId	SchedulingRequestResourceId		
schedulingRequestID	SchedulingRequestId		
periodicityAndOffset CHOICE {			
sl20	9	With SCS = kHz15 results in repetition every 20 ms	Config 1, 2, 4, 5
sl40	19	With SCS = kHz30 results in repetition every 20 ms	Config 3, 6
}			
}			

4.5.10.1.5 Test requirement

Table 4.5.10.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.5.10.1.5-1: Cell Specific Parameters for PSCell activation and deactivation

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA RF Channel Number		1,2,3,4,5,6	1			
NR RF Channel Number		1,2,3,4,5,6	2			
TDD configuration		1,4	Not Applicable			
		2,5	TDDConf.1.1			
		3,6	TDDConf.2.1			
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52			
		2,5	10: $N_{RB,c}$ = 52			
		3,6	40: $N_{RB,c}$ = 106			
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1			
PDSCH Reference measurement channel		1,4	SR.1.1 FDD			
		2,5	SR.1.1 TDD			
		3,6	SR.2.1 TDD			
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD			
		2,5	CR.1.1 TDD			
		3,6	CR.2.1 TDD			
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD			
		2,5	CCR.1.1 TDD			

		3,6	CCR.2.1 TDD	
OCNG Patterns		1,2,3,4,5,6	OP.1	
SSB configuration		1,2,4,5	SSB.1 FR1	
		3,6	SSB.2 FR1	
SMTC configuration		1,2,4,5	SMTC.1	
		3,6	SMTC.1	
TRS Configuration		1,4	TRS.1.1 FDD	
		2,5	TRS.1.1 TDD	
		3,6	TRS.1.2 TDD	
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD	
		2,5	CSI-RS.1.1 TDD	
		3,6	CSI-RS.2.1 TDD	
reportConfigType		1,2,3,4,5,6	periodic	
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI	
CSI reporting periodicity	slot	1,2,4,5	5	
		3,6	10	
CSI reporting offset	slot	1,2,4,5	2	
		3,6	4	
EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz	1,2,3,4,5,6	N/A	-88.6
N_{oc} Note2	dBm/SCS	1,2,4,5	N/A	-88.6
		3,6	N/A	-85.6
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	-infinity	0
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	-infinity	0
SS-RSRP Note3	dBm/SCS	1,2,4,5	-infinity	-88.6
		3,6	-infinity	-85.6
Io Note3	dBm/9.36MHz	1,2,4,5	N/A	-60.6
	dBm/38.1MHz	3,6	N/A	-54.6
Propagation condition		1,2,3,4,5,6	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE performs RACH-less based PSCell activation. UE shall transmit the SR on PUCCH for PSCell at latest 65 ms[Note1] into T2.

The UE shall send at least one PUSCH on PSCell during T3.

The UE shall stop transmit PUSCH for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell activation delay and PSCell deactivation delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.38 in TS 36.133 [23]:

$T_{activation_time} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2$ ms

Where:

$T_{RRC_delay} = 20$ms

$T_{processing} = 5$ ms

$T_{search} = 0$ ms

$T_{\Delta} = 20$ms

T_{IU}= max 20 ms

4.5.11 PSCell addition and release delay

4.5.11.0 Minimum conformance requirements

[TS 38.133, clause 8.9A]

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

Upon receiving conditional PSCell addition in subframe *n*, the UE shall be capable to transmit PRACH preamble towards PSCell no later than in subframe $n + T_{config_PSCell_Addition_Conditional}$:

Where:

$T_{config_PSCell_Addition_Conditional} = T_{RRC_delay} + T_{Event_DU} + T_{measure} + T_{UE_preparation} + T_{processing} + T_{\Delta} + T_{PSCell_DU} + 2$ ms

T_{RRC_delay} is the RRC processing delay defined in Clause 11.2 in 36.331 [29] which is the corresponding RRC message embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay defined in clause 12 in TS 38.331 [13] for processing the conditional PSCell addition command.

T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional PSCell addition command until a condition exists at the measurement reference point which will trigger the conditional PSCell addition.

$T_{measure}$ is the measurements time stated in clause 4.5.11.0.1.

$T_{UE_preparation}$ is the UE preparation time for conditional PSCell addition, and starts after UE realizes the condition of PSCell addition is met and identity of the PSCell is determined. $T_{UE_preparation}$ is up to 10 ms.

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period. $T_{processing}$ = 20 ms when PSCell is in FR1, and $T_{processing}$ = 40 ms when PSCell is in FR2.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = 1*Trs ms.

T_{PSCell_DU} is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{PSCell_DU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [8].

Trs is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

The PCell interruption specified in clause 8.2 of TS 38.133 [6] is allowed only after the UE starts to execute a conditional PSCell addition.

4.5.11.0.1 Measurement time

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a PSCell addition and interruption time starts.

The measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_with_index}$ defined in clause 9.3.4 of TS 38.133 [6]. When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_inter_with_index}$ for PSCell addition. If a cell, which has been detectable at least for the time period $T_{identify_inter_with_index}$ for PSCell addition, becomes undetectable for a period and then the cell becomes detectable again and triggers a PSCell addition, the measurement time delay shall be less than $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [7]. When L3 filtering is used, an additional delay can be expected.

4.5.11.1 EN-DC FR1 Addition and Release Delay of PSCell

4.5.11.1.1 Test purpose

The purpose of this test is to verify that the NR conditional PSCell addition delays under EN-DC are within the requirements stated in TS 38.133 [6] clause 8.9A.2.

4.5.11.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 17 onwards and supporting conditional PSCell addition in EN-DC.

4.5.11.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.11.0.

The normative reference for this requirement is TS 38.133 [6] clause 8.9A.

4.5.11.1.4 Test description

4.5.11.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.5.11.1.4.1-1.

Table 4.5.11.1.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
4.5.11.1-1	LTE FDD, NR SCS 15 kHz, BW 10 MHz, FDD
4.5.11.1-2	LTE FDD, NR SCS 15 kHz, BW 10 MHz, TDD
4.5.11.1-3	LTE FDD, NR SCS 30 kHz, BW 40 MHz, TDD
4.5.11.1-4	LTE TDD, NR SCS 15 kHz, BW 10 MHz, FDD
4.5.11.1-5	LTE TDD, NR SCS 15 kHz, BW 10 MHz, TDD
4.5.11.1-6	LTE TDD, NR SCS 30 kHz, BW 40 MHz, TDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 4.5.11.1.4.1-2 and Table 4.5.11.1.4.1-3.

Table 4.5.11.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.11.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

Table 4.5.11.1.4.1-3: General Test Parameters for Conditional PSCell Addition

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP Config 1,2,4,5	dBm	-96	Actual RSRP threshold for event B1. Value modified in test tolerance analysis in TR 38.903.
	Threshold RSRP Config 3, 6	dBm	-93	Actual RSRP threshold for event B1.
	Time to Trigger	s	0	
DRX			OFF	Continuous monitoring of primary cell
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
PRACH configuration on cell2			FR1 PRACH configuration 1	Captured in TS 38.133 [6] A.3.8.2.1
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	5	During this time the PCell is known and Cell 2 is unknown.
T2		s	≤7	During this time Cell 2 meets the addition condition and UE adds this PSCell.
T3		s	1	During this time the UE sends CSI reports for Cell 2. And the test system shall send an RRC message instructing the UE to release the PSCell.
T4		s	1	During this time the UE releases the Cell 2.

1. Message contents are defined in clause 4.5.11.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell. Cell 2 is the PSCell. The connection setup is done according to the settings in clause C.1.1.

3 Common test parameters are defined in Table 4.5.11.1.4.1-3.

4.5.11.1.4.2 Test procedure

The test consists of four successive time periods with duration of T1, T2, T3 and T4 respectively. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

At the start of time duration T1, the UE does not have any timing information of Cell 2. The network shall configure a condition and the target PSCell configuration implying addition of cell 2 during T1, at a time earlier than T_{RRC_delay} before the beginning of T2.

At the start of T2, cell 2 becomes detectable and meets the addition condition. UE shall be able to measure and detect that the condition is fulfilled during time Tmeasure. After which it will transmit the PRACH preamble. Reception by the test system of the PRACH preamble defines the start of T3.

During T3, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send an RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines during T4.

During T4, the UE shall release the PSCell.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall set the parameters according to Table 4.5.11.1.5-1 as appropriate. T1 starts.

3. The SS shall transmit an *RRCConnectionReconfiguration* message with condition CPA according to 36.508[25] Table 4.6.1-8 including *RRCConnectionReconfiguration* message and associated execution condition. The *RRCConnectionReconfiguration** message contains PSCell configuration in *RRCReconfiguration***. And measurement gap pattern #0 is configured for the UE.

4. The UE shall transmit an RRCConnectionReconfigurationComplete message indicating reception of the conditional configuration T1 expiring.

5. T2 starts. The execution condition of PSCell (Cell2) becomes satisfied, the UE applies *RRCConnectionReconfiguration* message corresponding to PSCell (Cell2) and releases measurement gap and UE sends *RRCConnectionReconfigurationComplete* message with condition MCG_SCG and CPA including *RRCReconfigurationComplete* message from the selected candidate PSCell.

6. The UE shall send PRACH to PSCell no later than 1112 ms from the start of T2, otherwise increase the number of failed iterations by one, switch off the UE and continue with step 12.

7. T3 starts.

8. During T3 the UE shall send at least one CSI report for PSCell with non-zero CQI index, otherwise increase the number of failed iterations by one, switch off the UE and continue to step 12.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell) after the UE has send at least one CQI report with non-zero CQI index for PSCell (Cell 2).

10. The UE shall transmit an *RRCConnectionReconfigurationComplete* message. T4 starts.

11. The UE shall stop sending CSI reports for PSCell no later than 20ms from the start of T4, if so increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.

12. Set Cell 2 physical cell identity = [((current cell 2 physical cell identity + 1) mod 1008)] for next iteration of the test procedure loop.

13. If the UE is not switched off, the SS shall transmit an RRCConnectionRelease message to release the RRC connection then, the SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State E-UTRA RRC_CONNECTED with generic parameter Connectivity E-UTRA/EPC. If paging succeeds, go to step 15, otherwise switches off the UE.

14. Switches on the UE and ensures the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

15. Repeat step 2-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.5.11.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.5.11.1.4.3-1: Common exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-5 with condition Pattern#0
Specific message contents exceptions for Test Configuration 4.5.11.1-1, 4.5.11.1-2, 4.5.11.1-4, 4.5.11.1-5	Table H.3.4-6 with condition SMTC.1 and SSB.1 FR1
Specific message contents exceptions for Test Configuration 4.5.11.1-3, 4.5.11.1-6	Table H.3.4-6 with condition SMTC.1 and SSB.2 FR1

Table 4.5.11.1.4.3-2: RRCConnectionReconfiguration (step 3)

Derivation Path: 36.508 [25], Table 4.6.1-8 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
c1 CHOICE{			
rrcConnectionReconfiguration-r8 ::= SEQUENCE {			
measConfig	MeasConfig-DEFAULT	Table 4.5.11.1.4.3-3	
}			
}			
}			
}			

Table 4.5.11.1.4.3-3: MeasConfig-DEFAULT

Derivation Path: Table H.3.4-4 with Condition INTER-RAT NR			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig-DEFAULT ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfigId	1		
reportConfig CHOICE {			
reportConfigInterRAT SEQUENCE {			
condReconfigurationTriggerNR-r17 SEQUENCE {			
condEventId CHOICE {			
condEventB1-NR-r17 SEQUENCE {			
b1-ThresholdNR-r17 CHOICE {			
nr-RSRP-r15	61		Config 1,2,4,5
	64		Config 3,6
}			
hysteresis-r17	0		

timeToTrigger-r17	ms0		
}			
}			
}			
}			
}			
}			
}			

4.5.11.1.5 Test requirement

Table 4.5.11.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.5.11.1.5-1: Cell Specific Parameters for Conditional PSCell Addition

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA RF Channel Number		1,2,3,4,5,6	1			
NR RF Channel Number		1,2,3,4,5,6	2			
TDD configuration		1,4	Not Applicable			
		2,5	TDDConf.1.1			
		3,6	TDDConf.2.1			
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52			
		2,5	10: $N_{RB,c}$ = 52			
		3,6	40: $N_{RB,c}$ = 106			
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1			
PDSCH Reference measurement channel		1,4	SR.1.1 FDD			
		2,5	SR.1.1 TDD			
		3,6	SR.2.1 TDD			
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD			
		2,5	CR.1.1 TDD			
		3,6	CR.2.1 TDD			
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD			
		2,5	CCR.1.1 TDD			
		3,6	CCR.2.1 TDD			
OCNG Patterns		1,2,3,4,5,6	OP.1			
SSB configuration		1,2,4,5	SSB.1 FR1			
		3,6	SSB.2 FR1			
SMTC configuration		1,2,4,5	SMTC.1			
		3,6	SMTC.1			
TRS Configuration		1,4	TRS.1.1 FDD			
		2,5	TRS.1.1 TDD			
		3,6	TRS.1.2 TDD			
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD			
		2,5	CSI-RS.1.1 TDD			
		3,6	CSI-RS.2.1 TDD			
reportConfigType		1,2,3,4,5,6	periodic			
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI			
CSI reporting periodicity	slot	1,2,4,5	5			
		3,6	10			
CSI reporting offset	slot	1,2,4,5	2			
		3,6	4			
EPRE ratio of PSS to SSS						
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						

EPRE ratio of PDCCH DMRS to SSS	dB	1,2,3,4,5,6	0	
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz	1,2,4,5	N/A	-85
		3,6	N/A	-88.6
N_{oc} Note2	dBm/SCS	1,2,4,5	N/A	-85
		3,6	N/A	-85.6
$\hat{E}_s / I_{ot}$		1,2,3,4,5,6	-infinity	0
$\hat{E}_s / N_{oc}$		1,2,3,4,5,6	-infinity	0
SS-RSRP Note3	dBm/SCS	1,2,4,5	-infinity	-85
		3,6	-infinity	-85.6
Io Note3	dBm/9.36MHz	1,2,4,5	N/A	-54
	dBm/38.1MHz	3,6	N/A	-51.5
Propagation condition		1,2,3,4,5,6	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

$T_{RRC_delay} + T_{Event_DU}$ occurs during T1 as the addition condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{UE_preparation} + T_{processing} + T_{\Delta} + T_{PSCell_DU} + 2$ ms = 1040+10+62ms=1112 ms from the start of T2.

The UE shall transmit at least one periodic CSI report for PSCell during T3.

The UE shall stop transmitting CSI reports for PSCell at latest 20 ms into T4.

All of the above test requirements shall be fulfilled in order for the observed conditional PSCell addition delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

4.6 Measurement procedures

4.6.1 Intra-frequency measurements

4.6.1.0 Minimum conformance requirements

4.6.1.0.1 Minimum conformance requirements for event-triggered reporting without gap

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the

serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index}$. It is assumed that *deriveSSB-IndexFromCell*is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}) \text{ ms}$$

$$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 4.6.1.0.1-1, 4.6.1.0.1-2, 4.6.1.0.1-4 (deactivated SCell) or 4.6.1.0.1-5 (deactivated SCell)

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in table 4.6.1.0.1-3 or 4.6.1.0.1-6 (deactivated SCell)

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 4.6.1.0.1-7, table 4.6.1.0.1-8, table 4.6.1.0.1-9 (deactivated Scell), 4.6.1.0.1-10(deactivated SCell), or 4.6.1.0.1-11 ()

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined

- according to $CSSF_{outside_gap,i}$ in TS 38.133 [6] section 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when intrafrequency SMTC is fully non overlapping or partially overlapping with measurement gaps, or according to $CSSF_{within_gap,i}$ in TS 38.133 [6] section 9.1.5.2 for measurement conducted within measurement gaps, i.e. when intrafrequency SMTC is fully overlapping with measurement gaps.
- if the high layer in TS 38.331 [13] signalling of *smtc2* is configured, the assumed periodicity of intrafrequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the assumed periodicity of intrafrequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

$M_{pss/sss_sync_w/o_gaps}$: For a UE supporting FR2 power class 1, M_{pss/sss_sync}=40. For a UE supporting power class 2, $M_{pss/sss_sync_w/o_gaps}$ =24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync_w/o_gaps}$ =24. For a UE supporting FR2 power class 4, $M_{pss/sss_sync_w/o_gaps}$ = 24

$M_{meas_period_w/o_gaps}$: For a UE supporting power class 1, $M_{meas_period_w/o_gaps}$ =40. For a UE supporting FR2 power class 2, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting power class 3, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting power class 4, $M_{meas_period_w/o_gaps}$ = 24.

When intra-frequency SMTC is fully non overlapping with measurement gaps or intra-frequency SMTC is fully overlapping with MGs, K_p=1

When intra-frequency SMTC is partially overlapping with measurement gaps, K_p = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP

If the higher layer signalling in TS 38.331 [13] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$

For FR2,

$K_{layer1_measurement}$=1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or
- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by the union set of *SSB-ToMeasure* from all the configured

measurement objects on the same serving carrier which can be merged. and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

If SCG DRX is in use, intrafrequency cell identification requirements specified in Table 4.6.1.0.1-1, Table 4.6.1.0.1-2, Table 4.6.1.0.1-3, Table 4.6.1.0.1-4, Table 4.6.1.0.1-5 and Table 4.6.1.0.1-6 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 4.6.1.0.1-1: Time period for PSS/SSS detection, (Frequency range FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(M2 [Note 2]x 5 x K_p) x max(SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1.	
NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraRAT-MeasurementEnhancement-r16* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	
NOTE 4: When highSpeedMeasCA-Scell-r17 is configured and UE supports measurementEnhancementCA-r17, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1.	

Table 4.6.1.0.1-2: Time period for PSS/SSS detection, (Frequency range FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x SMTC period) [note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x $M_{pss/sss_sync_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified.	

Table 4.6.1.0.1-3: Time period for time index detection (Frequency range FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil (M2 [Note 2] x 3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified.	
NOTE 2: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1.	
NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[intraRAT-MeasurementEnhancement-r16]* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	
NOTE 4: When highSpeedMeasCA-Scell-r17 is configured and UE supports measurementEnhancementCA-r17, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1	

Table 4.6.1.0.1-4: Time period for PSS/SSS detection, deactivated SCell (Frequency range FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	5 x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	5 x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	5 x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$

Table 4.6.1.0.1-5: Time period for PSS/SSS detection, deactivated SCell (Frequency range FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	$M_{pss/sss_sync_w/o_gaps}$ x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	$M_{pss/sss_sync_w/o_gaps}$ x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	$M_{pss/sss_sync_w/o_gaps}$ x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$

Table 4.6.1.0.1-6: Time period for time index detection, deactivated SCell (Frequency range FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	3 x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	3 x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	3 x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$

Table 4.6.1.0.1-7: Time period for PSS/SSS detection, deactivated SCell (FR1), when *highSpeedMeasCA-Scell-r17* is configured

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	Ceil(5 x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(5 x K_p) x max(measCycleSCell, M2 [Note 1]xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil(5 x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1	

Table 4.6.1.0.1-8: Time period for time index detection, deactivated SCell (FR1)，when *highSpeedMeasCA-Scell-r17* is configured

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	Ceil(3 x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(3 x K_p) x max(measCycleSCell, M2 [Note 1]xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil(3 x K_p)x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1	

The measurement period for intra-frequency measurements without gaps is as shown in table 4.6.1.0.1-9, 4.6.1.0.1-10, 4.6.1.0.1-11 (deactivated SCell) or 4.6.1.0.1-12 (deactivated SCell). When *highSpeedMeasFlag-r16* is configured, $T_{SSB_measurement_period_intra}$ is specified in Table 4.6.1.0.1-13.

If the higher layer signalling in TS38.331 [13] signalling of *smtc2* is present and *smtc1* is fully overlapping with measurement and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{SSB_measurement_period_intra}$.

If SCG DRX is in use, intrafrequency measurement period requirements specified in Table 4.6.1.0.1-7, Table 4.6.1.0.1-10, Table 4.6.1.0.1-11 and Table 4.6.1.0.1-12 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

For FR2, a longer measurement period is allowed, if aperiodic CSI-RS resource is measured for L1-RSRP measurement on any FR2 serving frequency in the same band, and the CSI-RS resource is outside measurement gap and overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI

symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols. If *SSB-ToMeasure* or *SS-RSSI-Measurement* is configured, the SSB symbols are indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same band which can be merged and the RSSI symbols are indicated by *SS-RSSI-Measurement*.

Table 4.6.1.0.1-9: Measurement period for intrafrequency measurements without gaps (Frequency FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period) Note 1 x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified.	

Table 4.6.1.0.1-10: Measurement period for intrafrequency measurements without gaps (Frequency FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, ceil($M_{meas_period_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x SMTC period) Note 1 x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x $M_{meas_period_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil($M_{meas_period_w/o_gaps}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified.	

Table 4.6.1.0.1-11: Measurement period for intrafrequency measurements without gaps (deactivated SCell) (Frequency range FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	5 x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	5 x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	5 x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$

Table 4.6.1.0.1-12: Measurement period for intrafrequency measurements without gaps (deactivated SCell) (Frequency range FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$M_{meas_period\ with_gaps}$ x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	$M_{meas_period\ with_gaps}$ x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	$M_{meas_period\ with_gaps}$ x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$

Table 4.6.1.0.1-13: $T_{SSB_measurement_period_intra}$ When *highSpeedMeasFlag-r16* is configured (Frequency range FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX Note 2	max(200ms, ceil(5 x K_p) x SMTC period)Note 1 x $CSSF_{intra}$
DRX cycle≤ 160ms	max(200ms, ceil(5 x M2 Note 2 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
160ms < DRX cycle≤ 320ms	ceil(4 x M2 Note 2 x K_p) x max(SMTC period,DRX cycle) x $CSSF_{intra}$
DRX cycle>320ms	ceil(Y Note 3 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is	

	the one used by the cell being identified.
NOTE 2:	M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1.
NOTE 3:	Y=3 when SMTC <= 40ms, Y=5 when SMTC > 40ms.
NOTE 4:	When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[intraRAT-MeasurementEnhancement-r16]* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.
NOTE 5:	When highSpeedMeasCA-Scell-r17 is configured, the requirements apply to measurements of secondary component carrier with active SCell.

Table 4.6.1.0.1-14**: Measurement period for intra-frequency measurements without gaps (deactivated SCell) (FR1), when highSpeedMeasCA-Scell-r17 is configured**

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	ceil(5 x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 160ms	ceil(5 x K_p) x max(measCycleSCell, M2 [Note 1] x DRX cycle) x $CSSF_{intra}$
160ms < DRX cycle≤ 320ms	ceil(4 x K_p) x max(measCycleSCell, M2 [Note 1] x DRX cycle)
DRX cycle>320ms	ceil(Y [Note 2] x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1 NOTE 2: Y=3 when SMTC <= 40ms, Y=5 when SMTC > 40ms	

The normative reference for this requirement is TS 38.133 [6] clause 9.2.5.1 and 9.2.5.2.

4.6.1.0.2 Minimum conformance requirements for event-triggered measurements with gap

TS 38.133, clause 9.2.2]

The requirements in TS 38.133 [6] Section 9.2 apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] Sections 10.1.2 and 10.1.3 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in TS 38.133 [6] Sections 10.1.7 and 10.1.8 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in TS 38.133 [6] Sections 10.1.12 and 10.1.13 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.

[TS 38.133, clause 9.2.6.2]

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index.}$ The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} \text{ ms}$$

$$T_{identify_intra_with_index} = T_{PSS/SSS_sync_ntra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 4.6.1.0.2 or 4.6.1.0.2.

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in table 4.6.1.0.2.

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 4.6.1.0.2 or 4.6.1.0.2.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in TS 38.133 [6] section 9.1.5.2 for measurement conducted within measurement gaps.

$M_{pss/sss_sync_with_gaps}$: For a UE supporting FR2 power class 1, $M_{pss/sss_sync\ with_gaps}$=40. For a UE supporting FR2 power class 2, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting power class 4, $M_{pss/sss_sync\ with_gaps}$ =24

$M_{meas_period_with_gaps}$: For a UE supporting power class 1, $M_{meas_period_with_gaps}$ =40. For a UE supporting power class 2, $M_{meas_period_with_gaps}$ =24. For a UE supporting power class 3, $M_{meas_period_with_gaps}$ =24. For a UE supporting power class 4, $M_{meas_period\ with_gaps}$ =24.

If the higher layer signalling in TS 38.331 [13] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$.

If SCG DRX is in use, intrafrequency cell identification requirements specified in TS 38.133 [6] Table 9.2.6.1-1, Table 9.2.6.1-2, and Table 9.2.5.1-3 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 4.6.1.0.2: Time period for PSS/SSS detection (Frequency range FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, 5 x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x 5) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x max(MGRP, DRX cycle) x $CSSF_{intra}$

Table 4.6.1.0.2-2: Time period for PSS/SSS detection (Frequency range FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, $M_{pss/sss_sync_with_gaps}$ x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x $M_{pss/sss_sync_with_gaps}$) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	$M_{pss/sss_sync_with_gaps}$ x max(MGRP, DRX cycle) x $CSSF_{intra}$

Table 4.6.1.0.2: Time period for time index detection (Frequency range FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, 3 x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil(1.5x 3) x max(MGRP, SMTC period,DRX cycle) x $CSSF_{intra}$)
DRX cycle>320ms	3 x max(MGRP, DRX cycle) x $CSSF_{intra}$

[TS 38.133, clause 9.2.6.3]

The measurement period for FR1 intrafrequency measurements with gaps is as shown in Table 4.6.1.0.2-4.

The measurement period for FR2 intrafrequency measurements with gaps is as shown in Table 4.6.1.0.2-5.

If SCG DRX is in use, intrafrequency measurement period requirements specified in Table 4.6.1.0.2-4 and Table 4.6.1.0.2-5, shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 4.6.1.0.2-4: Measurement period for intrafrequency measurements with gaps (Frequency Range FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	Max(200ms, 5 x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x max(MGRP, DRX cycle) x $CSSF_{intra}$

Table 4.6.1.0.2-5: Measurement period for intrafrequency measurements with gaps (Frequency Range FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, $M_{meas_period\ with_gaps}$ x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x $M_{meas_period\ with_gaps}$) x max(MGRP, SMTC period, DRX cycle)) Note 1 x $CSSF_{intra}$
DRX cycle>320ms	$M_{meas_period\ with_gaps}$ x max(MGRP, DRX cycle) x $CSSF_{intra}$

[TS 38.133, clause 9.2.4.3]

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in TS 38.133 [6] sections 10.1.2.1, 10.1.3.1, 10.1.7.1, 10.1.8.1, 10.1.12.1 and 10.1.13.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify\ intra\ without\ index}$ defined in TS 38.133 [6] clause 9.2.5.1 or clause 9.2.6.2. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index}$ or $T_{identify\ intra\ with\ index}$ defined in TS 38.133 [6] clause 9.2.5.1 or clause 9.2.6.2 becomes undetectable for a period and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period,\ Intra}$ provided the timing to that cell has not changed more than ± 3200 Tc while the measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clause 9.2.2, 9.2.6.2, 9.2.6.3 and 9.2.4.3.

4.6.1.1 EN-DC FR1 event-triggered reporting without gap in non-DRX

4.6.1.1.1 Test purpose

This test is to verify the UE makes correct reporting of an event without gap within the intra-frequency cell search requirements.

4.6.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

4.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.1.1.

4.6.1.1.4 Test description

4.6.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.1.1.4.1-1.

Table 4.6.1.1.4.1-1: supported test configurations

Test Case ID	Description
4.6.1.1-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.1.1-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.1.1-3	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.6.1.1.4.1-2 and Table 4.6.1.1.4.1-3.

Table 4.6.1.1.4.1-2: Initial conditions for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 4.6.1.1.4.1-3: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2, 3	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3	N/A	OFF
Time offset between PCell and PSCell		1, 2, 3	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells

Parameter	Unit	Test configuration	Value	Comment
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

1. Message contents are defined in clause 4.6.1.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the neighbour NR Cell.

4.6.1.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Configure MCG and SCG according to clause C.1 for all downlink physical channels.
3. The SS shall configure the PCell (Cell 1) and PSCell (Cell 2) on the MCG and SCG as per TS 38.508-1 [14] clause 4.5 with the message content exceptions defined in clause 4.6.1.1.4.3.
4. Set the parameters according to T1 in Table 4.6.1.1.4.1-2. Propagation conditions are set according to Annex C clauses C.2.2
5. The SS shall transmit an RRCConnectionReconfiguration message with event A3 configured.
6. The UE shall transmit an RRCConnectionReconfigurationComplete message. T1 starts.
7. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.1.1.4.1-2.
8. UE shall transmit a MeasurementReport message triggered by Event A3 for Cell 3 on PCell (Cell 1). If the measurement reporting delay from the beginning of time period T2 is less than 802 the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one.
9. The SS waits until the MeasurementReport message is received or when T2 expires.
10. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.
11. Set Cell 3 physical cell identity = [((current cell 3 physical cell identity + 3) mod 1008)] for next iteration of the test procedure loop.
12. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.
13. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5].
14. Repeat steps 3-13 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.1.1.4.3-1: Common Exception messages for Additional EN-DC FR1 event-triggered reporting without gap in non-DRX test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-4
Specific message contents exceptions for Test Configuration 4.6.1.1-1 and 4.6.1.1-4	Table H.3.1-3 with Condition SSB.1 FR1Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.6.1.1-2 and 4.6.1.1-5	Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.6.1.1-3 and 4.6.1.1-6	Table H.3.1-3 with Condition SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

4.6.1.1.5 Test requirement

Table 4.6.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.1.1.5-1: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{oc}$	dB	1	4	-1.46	-Infinity	-1.46

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	-Infinity	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-Infinity	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-Infinity	-56.16
Propagation Condition		1, 2, 3	AWGN			

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delays measured test requirement is expressed as:

$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})$ ms

T_{PSS/SSS_sync_intra} = max[600ms, ceil(5 x K_p) x SMTC period] x $CSSF_{intra}$ = 600ms

$T_{SSB_measurement_period_intra}$ = max[200ms, ceil(5 x K_p) x SMTC period] x $CSSF_{intra}$ = 200 ms

Which:

K_p = 1;

SMTC period as defined in Table 4.6.1.1.4.1-3;

$CSSF_{intra}$ = 1

TTI insertion uncertainty = TTI_{DCCH} = 1 ms; 2xTTI_{DCCH} = 2 ms

The overall delays measured shall be less than a total of 802 ms in this test case (note: this gives a total of 800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The rate of correct events observed during repeated tests shall be at least 90% with confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.1.2 EN-DC FR1 event-triggered reporting without gap in DRX

4.6.1.2.1 Test purpose

This test is to verify the UE makes correct reporting of an event without gap in DRX within the intra-frequency cell search requirements.

4.6.1.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR1 and long DRX cycle.

4.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.1.2.

4.6.1.2.4 Test description

4.6.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.1.2.4.1-1.

Table 4.6.1.2.4.1-1: supported test configurations

Test Case ID	Description
4.6.1.2-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.1.2-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.1.2-3	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.6.1.2.4.1-2 and Table 4.6.1.2.4.1-3.

Table 4.6.1.2.4.1-2: Initial conditions for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 4.6.1.2.4.1-3: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3	E-UTRAN Cell 1 and NR Cell 2		
Neighbour cell		1, 2, 3	NR Cell 3		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3		
SSB configuration		1	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.2 FR1		
SMTC configuration		1	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
A3-Offset	dB	1, 2, 3	-4.5		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used
DRX		1, 2, 3	DRX.1	DRX.7	Annex A.5 Table A.5-1
Time offset between PCell and PSCell		1, 2, 3	3 μs		Synchronous EN-DC

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Time offset between serving and neighbour cells		1	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2	3 µs		Synchronous cells
		3	3 µs		Synchronous cells
T1	s	1, 2, 3	5		
T2	s	1, 2, 3	5	10	

1. Message contents are defined in clause 4.6.1.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the neighbour NR Cell.

4.6.1.2.4.2 Test procedure

Same test procedure as in subclause 4.6.1.1.4.2 with Step 8 is replaced by following:

8. UE shall transmit a MeasurementReport message triggered by Event A3 for Cell 3 on PCell (Cell 1). If the overall delays measured from the beginning of time period T2 is less than 922 ms for Test 1 or less than 6402 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

4.6.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.1.2.4.3-1: Common Exception messages for Additional EN-DC FR1 event-triggered reporting without gap in DRX test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 Table H.3.7-1 with Condition DRX.1 and Offset for Test 1 Table H.3.7-1 with Condition DRX.7 and Offset for Test 2 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2
Specific message contents exceptions for Test Configuration 4.6.1.2-1 and 4.6.1.2-4	Table H.3.1-3 with Condition SSB.1 FR1Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.6.1.2-2 and 4.6.1.2-5	Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.6.1.2-3 and 4.6.1.2-6	Table H.3.1-3 with Condition SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

4.6.1.2.5 Test requirement

Table 4.6.1.2.4.1-2 and Table 4.6.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.1.2.5-1: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	

		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP. 0.1 ULBWP.0.1		DLBWP. 0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} note 2	dBm/15 KHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP note 3	dBm/SCS KHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	-Infinity	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-Infinity	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-Infinity	-56.16
Propagation Condition		1, 2, 3	AWGN			

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 922 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The overall delays measured test requirement is expressed in test 1 with DRX 40ms as:

$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})$ ms

$T_{PSS/SSS_sync_intra} = \max[600ms, ceil(1.5 \times 5 \times K_p) \times \max(SMTC\ period, DRX\ cycle)] \times CSSF_{intra} = 600ms$

$T_{SSB_measurement_period_intra} = \max[200ms, ceil(1.5 \times 5 \times K_p) \times \max(SMTC\ period, DRX\ cycle)] \times CSSF_{intra} = 320$ ms

Which:

$K_p = 1$;

SMTC period as defined in Table 4.6.1.2.4.1-3;

DRX cycle = 40;

$CSSF_{intra}$ = 1

TTI insertion uncertainty = TTI_{DCCH} = 1 ms; 2xTTI_{DCCH} = 2 ms

The overall delays measured shall be less than a total of 922 ms in test 1 (note: this gives a total of 920 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6402 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The overall delays measured test requirement is expressed in test 2 with DRX 640ms as:

$T_{identify_intra_without_index}$ = (T_{PSS/SSS_sync_intra} + $T_{SSB_measurement_period_intra}$) ms

T_{PSS/SSS_sync_intra} = ceil(5 x K_p) x DRX cycle x $CSSF_{intra}$= 3200ms

$T_{SSB_measurement_period_intra}$ = ceil(5 x K_p) x DRX cycle x $CSSF_{intra}$ = 3200 ms

Which:

K_p = 1;

DRX cycle = 640;

$CSSF_{intra}$ = 1

TTI insertion uncertainty = TTI_{DCCH} = 1 ms; 2xTTI_{DCCH} = 2 ms

The overall delays measured shall be less than a total of 6402 ms in test 2 (note: this gives a total of 6400 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.1.3 EN-DC FR1 event-triggered reporting with gap in non-DRX

4.6.1.3.1 Test purpose

To verify that the UE makes correct reporting of an event in non-DRX within EN-DC intra-frequency NR cell search requirements in TS 38.133 [6] clause 9.2. This test will partly verify the TDD intra-frequency cell search requirements.

4.6.1.3.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC, CSI-RS-based RLM and BWP operation without bandwidth restriction.

4.6.1.3.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.1.3.

4.6.1.3.4 Test description

4.6.1.3.4.1 Initial conditions

Test 4.6.1.3 can be run in one of the configurations defined in Table 4.6.1.3.4.1-1.

Table 4.6.1.3.4.1-1: Supported test configurations for NR FR1 Cell

Configuration	Description
4.6.1.3-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.6.1.3-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.6.1.3-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.6.1.3-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.6.1.3-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.6.1.3-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.6.1.5.4.1-2.

Table 4.6.1.3.4.1-2: Initial conditions for EN-DC event-triggered reporting in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.4.2 and 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.6.1.3.4.3.
2. The general test parameter settings are set up according to Table 4.6.1.3.4.1-3.
3. Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clauses C.1.1 and C.1.2. Cell 3 is powered OFF.

Table 4.6.1.3.4.1-3: General test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1-6	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1-6	NR Cell 3	Cell to be identified.
RF Channel Number		1-6	1: Cell 1 2: Cell 2 and Cell 3	
Measurement gap type		1-6	Per-UE gaps	
Measurement gap repetition periodicity	ms	1-6	40	
Measurement gap length	ms	1-6	6	
Measurement gap offset	ms	1-6	39	
SSB configuration		1,4	SSB.1 FR1	
		2,5	SSB.1 FR1	
		3,6	SSB.2 FR1	
SMTC configuration		1,4	SMTC.2	
		2,5	SMTC.1	
		3,6	SMTC.1	
CSI-RS parameters		1,4	CSI-RS.1.2 FDD resource #0	
		2,5	CSI-RS.1.2 TDD resource #0	
		3,6	CSI-RS.2.2 TDD resource #0	

Parameter	Unit	Test configuration	Value	Comment
A3-Offset	dB	1-6	-4.5	
CP length		1-6	Normal	
Hysteresis	dB	1-6	0	
Time To Trigger	s	1-6	0	
Filter coefficient		1-6	0	L3 filtering is not used
DRX		1-6	N/A	OFF
Time offset between PCell and PSCell		1-6	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		1,4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2,5	3 μs	Synchronous cells
		3,6	3 μs	Synchronous cells
T1	s	1-6	5	
T2	s	1-6	5	

4.6.1.3.4.2 Test procedure

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR cells according to T1 in Table 4.6.1.3.5-1.

3. SS shall transmit an RRCConnectionReconfiguration message with event A3 configured.

4. The UE shall transmit RRCConnectionReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.1.3.5-1. T2 starts.

6. UE shall transmit a MeasurementReport message embedded in E-UTRA RRC message *ULInformationTransferMRDC* triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 802 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, the SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure

parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions.

Table 4.6.1.3.4.3-1: Common Exception messages for Additional EN-DC FR1 event-triggered reporting with gap in non-DRX test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 Table H.3.5-8
Specific message contents exceptions for Test Configuration 4.6.1.3-1 and 4.6.1.3-4	Table H.3.1-3 with Condition SSB.1 FR1 andTable 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.6.1.3-2 and 4.6.1.3-5	Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.6.1.3-3 and 4.6.1.3-6	Table H.3.1-3 with Condition SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.6.1.3.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 configuration	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

Table 4.6.1.3.4.3-3

Condition	Explanation
BWP-Id1	Active BWP (BWP2)

4.6.1.3.5 Test requirement

Tables 4.6.1.3.4.1-3 and 4.6.1.3.5-1 define the primary level settings including test tolerances for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1.

Table 4.6.1.3.5-1: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1,4	N/A		N/A	
		2,5	TDDConf.1.1		TDDConf.1.1	
		3,6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1,4	SR.1.1 FDD		N/A	
		2,5	SR.1.1 TDD			
		3,6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD		CR.1.1 FDD	
		2,5	CR.1.1 TDD		CR.1.1 TDD	
		3,6	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1,4	CCR.1.2 FDD		CCR.1.1 FDD	
		2,5	CCR.1.2 TDD		CCR.1.1 TDD	
		3,6	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1-6	OP.1		OP.1	
TRS configuration		1,4	TRS.1.1 FDD		N/A	
		2,5	TRS.1.1 TDD		N/A	
		3,6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1-6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1-6	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1-6	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1-6	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,4	-98			
		2,5	-98			
		3,6	-95			
N_{oc} Note 2	dBm/15 kHz	1,4	-98			
		2,5				
		3,6				
$\hat{E}_s/I_{ot}$	dB	1,4	4	-1.46	-Infinity	-1.46
		2,5				
		3,6				
$\hat{E}_s/N_{oc}$	dB	1,4	4	4	-Infinity	4
		2,5				
		3,6				
SS-RSRP Note 3	dBm/SCS kHz	1,4	-94	-94	-Infinity	-94
		2,5	-94	-94	-Infinity	-94
		3,6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1,4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2,5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3,6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1-6	AWGN			

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to Cell 1.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_with_index}$

where,

$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})$ ms

T_{PSS/SSS_sync_ntra} = max (600ms, ceil (5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$ = max (600ms, ceil (5 x 1) x 20ms) x 1 = 600ms

$T_{SSB_measurement_period_intra}$ = max (200ms, ceil (5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$ = max (200ms, ceil (5 x 1) x 20ms) x 1 = 200ms

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 802 ms in this test case (note: this gives a total of 800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.6.1.4 EN-DC FR1 event-triggered reporting with gap in DRX

4.6.1.4.1 Test purpose

To verify that the UE makes correct reporting of an event in DRX within EN-DC intra-frequency NR cell search requirements in TS 38.133 [6] clause 9.2. This test will partly verify the intra-frequency cell search requirements.

4.6.1.4.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC, CSI-RS-based RLM, BWP operation without bandwidth restriction and long DRX cycle.

4.6.1.4.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.1.4.

4.6.1.4.4 Test description

4.6.1.4.4.1 Initial conditions

Test 4.6.1.4 can be run in one of the configurations defined in Table 4.6.1.4.4.1-1.

Table 4.6.1.4.4.1-1: Supported test configurations for NR FR1 Cell

Configuration	Description
4.6.1.4-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.6.1.4-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.6.1.4-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.6.1.4-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.6.1.4-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.6.1.4-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.6.1.4.4.1-2.

Table 4.6.1.4.4.1-2: Initial conditions for EN-DC event-triggered reporting in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.4.2 and 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.6.1.4.4.3.

2. The general test parameter settings are set up according to Table 4.6.1.4.4.1-3.

3. Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clauses C.1.1 and C.1.2. Cell 3 is powered OFF.

Table 4.6.1.4.4.1-3: General test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1-6	E-UTRAN Cell 1 and NR Cell 2		
Neighbour cell		1-6	NR Cell 3		Cell to be identified.
RF Channel Number		1-6	1: Cell 1 2: Cell 2 and Cell 3		
Measurement gap type		1-6	Per-UE gaps		
Measurement gap repetition periodicity	ms	1-6	40		
Measurement gap length	ms	1-6	6		
Measurement gap offset	ms	1-6	39		
SSB configuration		1,4	SSB.1 FR1		
		2,5	SSB.1 FR1		
		3,6	SSB.2 FR1		
SMTC configuration		1,4	SMTC.2		
		2,5	SMTC.1		
		3,6	SMTC.1		
CSI-RS parameters		1,4	CSI-RS.1.2 FDD resource #0		
		2,5	CSI-RS.1.2 TDD resource #0		
		3,6	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1-6	-4.5		
CP length		1-6	Normal		
Hysteresis	dB	1-6	0		
Time To Trigger	s	1-6	0		
Filter coefficient		1-6	0		L3 filtering is not used
DRX		1-6	DRX.1	DRX.7	
Time offset between PCell and PSCell		1-6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		1,4	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
		2,5	3 μs		Synchronous cells
		3,6	3 μs		Synchronous cells
T1	s	1-6	5		
T2	s	1-6	5	10	

4.6.1.4.4.2 Test procedure

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell.

In the measurement control information a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters of NR cells according to T1 in Table 4.6.1.4.5-1.
3. SS shall transmit an RRCConnectionReconfiguration message with event A3 configured.
4. The UE shall transmit RRCConnectionReconfigurationComplete message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.1.4.5-1. T2 starts.
6. UE shall transmit a MeasurementReport message embedded in E-UTRA RRC message *ULInformationTransferMRDC* triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 922 ms for Test 1 or less than 6402 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.
8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, the SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.
11. Repeat step 1-10 for each sub-test in Table 4.6.1.4.4.1-3 as appropriate.

4.6.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.1.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.7-1 with Condition DRX.1 and Gap for test 1 Table H.3.7-1 with Condition DRX.7 and Gap for test 2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 Table H.3.5-8
Specific message contents exceptions for Test Configuration 4.6.1.3-1 and 4.6.1.3-4	Table H.3.1-3 with Condition SSB.1 FR1 andTable 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.6.1.3-2 and 4.6.1.3-5	Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.6.1.3-3 and 4.6.1.3-6	Table H.3.1-3 with Condition SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.6.1.4.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 configuration	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

Table 4.6.1.4.4.3-3

Condition	Explanation
BWP-Id1	Active BWP (BWP2)

4.6.1.4.5 Test requirement

Tables 4.6.1.4.4.1-3 and 4.6.1.4.5-1 define the primary level settings including test tolerances for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1.

Table 4.6.1.4.5-1: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1,4	N/A		N/A	
		2,5	TDDConf.1.1		TDDConf.1.1	
		3,6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1,4	SR.1.1 FDD		N/A	
		2,5	SR.1.1 TDD			
		3,6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD		CR.1.1 FDD	
		2,5	CR.1.1 TDD		CR.1.1 TDD	
		3,6	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1,4	CCR.1.2 FDD		CCR.1.1 FDD	
		2,5	CCR.1.2 TDD		CCR.1.1 TDD	
		3,6	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1-6	OP.1		OP.1	
TRS configuration		1,4	TRS.1.1 FDD		N/A	
		2,5	TRS.1.1 TDD		N/A	
		3,6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1-6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1-6	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1-6	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1-6	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,4	-98			
		2,5	-98			
		3,6	-95			
N_{oc} Note 2	dBm/15 KHz	1,4	-98			
		2,5				
		3,6				
$\hat{E}_s/I_{ot}$	dB	1,4	4	-1.46	-Infinity	-1.46
		2,5				
		3,6				
$\hat{E}_s/N_{oc}$	dB	1,4	4	4	-Infinity	4
		2,5				
		3,6				
SS-RSRP Note 3	dBm/SCS KHz	1,4	-94	-94	-Infinity	-94
		2,5	-94	-94	-Infinity	-94
		3,6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1,4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2,5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3,6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1-6	AWGN			

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to Cell 1.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_with_index}$

where,

For Test 1:

$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_ntra} + T_{SSB_measurement_period_intra})$ ms

T_{PSS/SSS_sync_ntra} = max (600ms, ceil(1.5x 5 x K_p) x max (SMTC period,DRX cycle)) x $CSSF_{intra}$ = max (600ms, ceil(1.5 x 5 x 1) x max (20ms, 40ms)) x 1 = 600ms

$T_{SSB_measurement_period_intra}$ = max (200ms, ceil(1.5x 5 x K_p) x max (SMTC period,DRX cycle)) x $CSSF_{intra}$ = max (200ms, ceil(1.5 x 5 x 1) x max (20ms, 40ms)) x1 = 320ms

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 922 ms in this test case (note: this gives a total of 920 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For Test 2:

$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_ntra} + T_{SSB_measurement_period_intra})$ ms

T_{PSS/SSS_sync_ntra} = ceil (5 x K_p) x DRX cycle x $CSSF_{intra}$ = ceil (5 x1) x 640ms x 1 = 3200ms

$T_{SSB_measurement_period_intra}$ = ceil (5 x K_p) x DRX cycle x $CSSF_{intra}$ = ceil (5 x1) x 640ms x 1 = 3200ms

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 6402 ms in this test case (note: this gives a total of 6400 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.6.1.5 EN-DC FR1 event-triggered reporting without gap in non-DRX with SSB time index detection

4.6.1.5.1 Test purpose

To verify that the UE makes correct reporting of an event in non-DRX within EN-DC intra-frequency NR cell search requirements in TS 38.133 [6] clause 9.2. This test will partly verify the FDD intra-frequency cell search requirements. UE is required to report SSB time index.

4.6.1.5.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

4.6.1.5.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.1.5.

4.6.1.5.4 Test description

4.6.1.5.4.1 Initial conditions

Test 4.6.1.5 can be run in one of the configurations defined in Table 4.6.1.5.4.1-1.

Table 4.6.1.5.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
4.6.1.5-1	LTE FDD, 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.1.5-2	LTE TDD, 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.6.1.5.4.1-2.

Table 4.6.1.5.4.1-2: Initial conditions for EN-DC event-triggered reporting in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.4.2 and 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.6.1.5.4.3.
2. The general test parameter settings are set up according to Table 4.6.1.5.4.1-3.
3. Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clauses C.1.1 and C.1.2. Cell 3 is powered OFF.

Table 4.6.1.5.4.1-3: General test parameters for EN-DC intra-frequency event triggered reporting without gap for FDD PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1,2	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1,2	NR Cell 3	Cell to be identified.
RF Channel Number		1,2	1: Cell 1 2: Cell 2 and Cell 3	
SSB configuration		1,2	SSB.1 FR1	
SMTC configuration		1,2	SMTC.2	
A3-Offset	dB	1,2	-4.5	
CP length		1,2	Normal	
Hysteresis	dB	1,2	0	
Time To Trigger	s	1,2	0	
Filter coefficient		1,2	0	L3 filtering is not used
DRX		1,2	N/A	OFF
Time offset between PCell and PSCell		1,2	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		1,2	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
T1	s	1,2	5	
T2	s	1,2	5	

4.6.1.5.4.2 Test procedure

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters of NR cells according to T1 in Table 4.6.1.5.5-1.
3. SS shall transmit an RRCConnectionReconfiguration message with event A3 configured.
4. The UE shall transmit RRCConnectionReconfigurationComplete message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.1.5.5-1. T2 starts.
6. UE shall transmit a MeasurementReport message embedded in E-UTRA RRC message *ULInformationTransferMRDC* triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 922 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.
8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, the SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.1.5.4.3-1: Common Exception messages for Additional EN-DC FR1 event-triggered reporting without gap in non-DRX with SSB time index detection test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition SSB.1 FR1 and Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2Table H.3.1-4 with Condition SSB Index and A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ and SSB Index Table H.3.4-1 Table H.3.4-1a Table H.3.4-2

4.6.1.5.5 Test requirement

Tables 4.6.1.5.4.1-3 and 4.6.1.5.5-1 define the primary level settings including test tolerances for EN-DC FR1 event-triggered reporting without gap in non-DRX with SSB time index detection.

Table 4.6.1.5.5-1: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for FDD PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1,2	N/A		N/A	
PDSCH RMC configuration		1,2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1,2	CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET RMC configuration		1,2	CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Patterns		1,2	OP.1		OP.1	
TRS configuration		1,2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1,2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1,2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1,2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1,2	-98			
N_{oc} Note 2	dBm/15 kHz	1,2	-98			
$\hat{E}_s/I_{ot}$	dB	1,2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1,2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1,2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1,2	AWGN			

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to Cell 1.The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_with_index}$

where,

$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra})$ ms

- T_{PSS/SSS_sync_intra} = max (600ms, ceil (5 x K_p) x SMTC period)$^{Note\ 1}$ x $CSSF_{intra}$ = max (600ms, Ceil(5 x 1) x 20ms) x 1 = 600ms

- $T_{SSB_measurement_period_intra}$ = max (200ms, ceil (5 x K_p) x SMTC period)$^{Note\ 1}$ x $CSSF_{intra}$ = max (200ms, ceil(5 x 1) x 20ms) x 1 = 200ms

- $T_{SSB_time_index_intra}$ = max (120ms, ceil (3 x K_p) x SMTC period)$^{Note\ 1}$ x $CSSF_{intra}$ = max (120ms, ceil (3 x 1) x 20ms) x 1 = 120ms

  TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 922 ms in this test case (note: this gives a total of 920 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.6.1.6 EN-DC FR1 event-triggered reporting with gap in non-DRX with SSB time index detection

4.6.1.6.1 Test purpose

To verify that the UE makes correct reporting of an event in non-DRX within EN-DC intra-frequency NR cell search requirements in TS 38.133 [6] clause 9.2. This test will partly verify the FDD intra-frequency cell search requirements. UE is required to report SSB time index.

4.6.1.6.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC, CSI-RS-based RLM and BWP operation without bandwidth restriction.

4.6.1.6.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.1.6.

4.6.1.6.4 Test description

4.6.1.6.4.1 Initial conditions

Test 4.6.1.6 can be run in one of the configurations defined in Table 4.6.1.6.4.1-1.

Table 4.6.1.6.4.1-1: Supported test configurations for NR FR1 Cell

Configuration	Description
4.6.1.6-1	LTE FDD, 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.1.6-2	LTE TDD, 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.6.1.6.4.1-2.

Table 4.6.1.6.4.1-2: Initial conditions for EN-DC event-triggered reporting in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.4.2 and 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 4.6.1.6.4.3.
2. The general test parameter settings are set up according to Table 4.6.1.6.4.1-3.
3. Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clauses C.1.1 and C.1.2. Cell 3 is powered OFF.

Table 4.6.1.6.4.1-3: General test parameters for EN-DC intra-frequency event triggered reporting with gap for PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1,2	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1,2	NR Cell 3	Cell to be identified.
RF Channel Number		1,2	1: Cell 1 2: Cell 2 and Cell 3	
Measurement gap type		1,2	Per-UE gaps	
Measurement gap repetition periodicity	ms	1,2	40	
Measurement gap length	ms	1,2	6	
Measurement gap offset	ms	1,2	39	
SSB configuration		1,2	SSB.1 FR1	
SMTC configuration		1,2	SMTC.2	
CSI-RS parameters		1,2	CSI-RS.1.2 FDD resource #0	
A3-Offset	dB	1,2	-4.5	
CP length		1,2	Normal	
Hysteresis	dB	1,2	0	
Time To Trigger	s	1,2	0	
Filter coefficient		1,2	0	L3 filtering is not used
DRX		1,2	N/A	OFF
Time offset between PCell and PSCell		1,2	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		1,2	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
T1	s	1,2	5	
T2	s	1,2	5	

4.6.1.6.4.2 Test procedure

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR cells according to T1 in Table 4.6.1.6.5-1.

3. SS shall transmit an RRCConnectionReconfiguration message with event A3 configured.

4. The UE shall transmit RRCConnectionReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.1.6.5-1. T2 starts.

6. UE shall transmit a MeasurementReport message embedded in E-UTRA RRC message *ULInformationTransferMRDC* triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 922 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, the SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.1.6.4.3-1: Common Exception messages for Additional EN-DC FR1 event-triggered reporting with gap in non-DRX with SSB time index detection test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.2 for Configuration 4.6.1.6-1 Table H.3.1-4 with Condition SSB Index and A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ and SSB Index Table H.3.1-8 with Condition CSI-RS RLM Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 Table H.3.5-8

Table 4.6.1.6.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 configuration	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

Condition	**Explanation**
BWP-Id1	Active BWP (BWP2)

4.6.1.6.5 Test requirement

Tables 4.6.1.6.4.1-3 and 4.6.1.6.5-1 define the primary level settings including test tolerances for EN-DC intra-frequency event triggered reporting with gap for PSCell in FR1 with SSB index reading.

Table 4.6.1.6.5-1: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with gap for PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1,2	N/A		N/A	
PDSCH RMC configuration		1,2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1,2	CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET RMC configuration		1,2	CCR.1.2 FDD		CCR.1.1 FDD	
OCNG Patterns		1,2	OP.1		OP.1	
TRS configuration		1,2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1,2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1,2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1,2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,2	-98			
N_{oc} Note 2	dBm/15 kHz	1,2	-98			
$\hat{E}_s / I_{ot}$	dB	1,2	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1,2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1,2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1,2	-64.60	-62.25	-64.60	-62.25

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
Propagation Condition		1,2	AWGN			
NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to Cell 1.The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_with_index}$

where,

$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_ntra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra})$ ms

T_{PSS/SSS_sync_ntra} = max (600ms, ceil (5 x K_p) x SMTC period)$^{Note\ 1}$ x $CSSF_{intra}$ = max (600ms, Ceil(5 x 1) x 20ms) x 1 = 600ms

$T_{SSB_measurement_period_intra}$ = max (200ms, ceil (5 x K_p) x SMTC period)$^{Note\ 1}$ x $CSSF_{intra}$ = max (200ms, ceil(5 x 1) x 20ms) x 1 = 200ms

$T_{SSB_time_index_intra}$ = max (120ms, ceil (3 x K_p) x SMTC period)$^{Note\ 1}$ x $CSSF_{intra}$ = max (120ms, ceil (3 x 1) x 20ms) x 1 = 120ms

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 922 ms in this test case (note: this gives a total of 920 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

4.6.1.7 EN-DC FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16

4.6.1.7.1 Test purpose

This test is to verify that the UE makes correct reporting of an event for UE configured with *highSpeedMeasFlag-r16*. This test will partly verify the intra-frequency cell search requirements in TS 38.133 [6] clause 9.2.5.1 and 9.2.5.2.

4.6.1.7.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR1, long DRX cycle, measurement enhancements in HST.

4.6.1.7.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.1.7.

4.6.1.7.4 Test description

4.6.1.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.1.7.4.1-1.

Table 4.6.1.7.4.1-1: supported test configurations for EN-DC FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16

Configuration	Description
4.6.1.7-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.6.1.7-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.6.1.7-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4.6.1.7-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.6.1.7-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.6.1.7-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Configure the test equipment and the DUT according to the parameters in Table 4.6.1.7.4.1-2 and Table 4.6.1.7.4.1-3.

Table 4.6.1.7.4.1-2: Initial conditions for EN-DC FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 4.6.1.7.4.1-3: General test parameters for EN-DC FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Value	Comment
highSpeedMeasFlag-r16		1,2,3,4,5,6	Present	To enable high speed measurement enhancements
Active cell		1, 2, 3,4,5,6	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2, 3,4,5,6	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3,4,5,6	1: Cell 1 2: Cell 2 and Cell 3	
SSB configuration		1,4	SSB.1 FR1	
		2,5	SSB.1 FR1	
		3,6	SSB.2 FR1	
SMTC configuration		1,4	SMTC.2	
		2,5	SMTC.1	
		3,6	SMTC.1	
A3-Offset	dB	1, 2, 3,4,5,6	-4.5	
CP length		1, 2, 3,4,5,6	Normal	

Parameter	Unit	Test configuration	Value	Comment
Hysteresis	dB	1, 2, 3,4,5,6	0	
Time To Trigger	s	1, 2, 3,4,5,6	0	
Filter coefficient		1, 2, 3,4,5,6	0	L3 filtering is not used
DRX		1, 2, 3,4,5,6	DRX.7.	640ms DRX cycle
Time offset between PCell and PSCell		1, 2, 3,4,5,6	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		1,4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2,5	3 μs	Synchronous cells
		3,6	3 μs	Synchronous cells
T1	s	1, 2, 3,4,5,6	5	
T2	s	1, 2, 3,4,5,6	6	

1. Message contents are defined in clause 4.6.1.7.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the neighbour NR Cell.

4.6.1.7.4.2 Test procedure

Same test procedure as in subclause 4.6.1.1.4.2 with Step 1 and 8 are replaced by following:

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. UE is configured with *highSpeedMeasFlag-r16.*

8. UE shall transmit a *MeasurementReport* message triggered by Event A3 for Cell 3 on PCell (Cell 1). If the overall delays measured from the beginning of time period T2 is less than 5122 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

4.6.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.1.7.4.3-0: Common Exception messages for Additional EN-DC FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16 test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 Table H.3.7-1 with Condition DRX.7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2
Specific message contents exceptions for Test Configuration 4.6.1.2-1 and 4.6.1.2-4	Table H.3.1-3 with Condition SSB.1 FR1 and Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2

Specific message contents exceptions for Test Configuration 4.6.1.2-2 and 4.6.1.2-5	Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.6.1.2-3 and 4.6.1.2-6	Table H.3.1-3 with Condition SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.6.1.7.4.3-1: Void

Table 4.6.1.7.4.3-2: Void

Table 4.6.1.7.4.3-3: CellGroupConfig (Step 1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex for Cell 2		
reconfigurationWithSync SEQUENCE {			
spCellConfigCommon	ServingCellConfigCommon	Table 4.6.1.7.4.3-4	
}			
}			
}			

Table 4.6.1.7.4.3-4: ServingCellConfigCommon (Table 4.6.1.7.4.3-3)

Derivation Path: TS 38.508-1[14], Table 4.6.3-168 with condition HST			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
highSpeedConfig-r16 SEQUENCE {			
highSpeedMeasFlag-r16	true		
}			
}			

4.6.1.7.5 Test requirement

Table 4.6.1.7.4.1-2 and Table 4.6.1.7.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.1.7.5-1: NR Cell specific test parameters for EN-DC FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1,4	N/A		N/A	
		2,5	TDDConf.1.1		TDDConf.1.1	
		3,6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1,4	SR.1.1 FDD		N/A	
		2,5	SR.1.1 TDD			
		3,6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD		CR.1.1 FDD	
		2,5	CR.1.1 TDD		CR.1.1 TDD	
		3,6	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1,4	CCR.1.1 FDD		CCR.1.1 FDD	
		2,5	CCR.1.1 TDD		CCR.1.1 TDD	
		3,6	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3,4,5,6	OP.1		OP.1	
TRS configuration		1,4	TRS.1.1 FDD		N/A	
		2,5	TRS.1.1 TDD		N/A	
		3,6	TRS.1.2 TDD		N/A	

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
Initial BWP configuration		1, 2, 3,4,5,6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3,4,5,6	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3,4,5,6	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3,4,5,6	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1,4	-98			
		2,5	-98			
		3,6	-95			
N_{oc} Note 2	dBm/15 kHz	1,4	-98			
		2,5				
		3,6				
$\hat{E}_s / I_{ot}$	dB	1,4	4	-1.46	-Infinity	-1.46
		2,5				
		3,6				
$\hat{E}_s / N_{oc}$	dB	1,4	4	4	-Infinity	4
		2,5				
		3,6				
SS-RSRP Note 3	dBm/SCS kHz	1,4	-94	-94	-Infinity	-94
		2,5	-94	-94	-Infinity	-94
		3,6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1,4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2,5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3,6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2,4,5	AWGN		AWGN 1944 Hz Note 4	
		3,6	AWGN		AWGN 3334 Hz Note 5	

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: The AWGN 1944 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 1944Hz.
NOTE 5: The AWGN 3334 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_intra_without_index} + 2 \times TTI_{DCCH}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}$, is the measurement reporting delay.

$T_{PSS/SSS_sync_intra} = ceil(5 \times K_p) \times DRX\ cycle \times CSSF_{intra} = 3200$ ms, is the time period used in PSS/SSS detection defined in 38.133 [6] clause 9.2.5.1

$T_{SSB_measurement_period_intra} = ceil(Y \times K_p) \times DRX\ cycle \times CSSF_{intra} = 1920$ ms, equal to a measurement period of SSB based measurement defined in 38.133 [6] clause 9.2.5.2.

Where:

$K_p = 1$ for intra-frequency SMTC which is fully non-overlapping with measurement gaps;

DRX cycle = 640 as given in Table 4.6.1.7.4.1-3;

$CSSF_{intra}$ = 1 when only 1 intra-frequency layer is configured.

Y = 3 for DRX cycle =640 ms and SMTC period = 20 ms as given in Table 4.6.1.7.4.1-3.

TTI_{DCCH} = 1 ms, is the TTI insertion uncertainty.

That gives a total of 5122 ms.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with confidence level of 95%.

4.6.1.8 EN-DC FR1 event triggered reporting cell without SSB time index detection in DRX for UE configured with highSpeedMeasCA-Scell-r17

4.6.1.8.1 Test purpose

This test is to verify that the UE makes correct reporting of an event for UE configured with highSpeedMeasCA-Scell-r17. This test will partly verify the intra-frequency cell search requirements in TS 38.133 [6] clause 9.2.5.

4.6.1.8.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward supporting enhanced NR CA measurement requirements in high-speed scenario.

4.6.1.8.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.1.8.

4.6.1.8.4 Test description

4.6.1.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.1.8.4.1-1.

Table 4.6.1.8.4.1-1: Supported PCell and PSCell test configurations for EN-DC FR1 event triggered reporting cell without SSB time index detection in DRX for UE configured with highSpeedMeasCA-Scell-r17

Configuration	Description
4.6.1.8-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.1.8-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.1.8-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.6.1.8-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.1.8-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.1.8-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BWchannel) defined in each test configuration.	

Table 4.6.1.8.4.1-1A: Supported SCell test configurations for EN-DC FR1 event triggered reporting cell without SSB time index detection in DRX for UE configured with highSpeedMeasCA-Scell-r17

$Configuration_{SCell}$	Description
4.6.1.8-1A	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.6.1.8-2A	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.6.1.8-3A	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BWchannel) defined in each test configuration.
Note 3:	NR Cell 4 has the same SCS, BW and duplex mode as NR Cell 3.

Configure the test equipment and the DUT according to the parameters in Table 4.6.1.8.4.1-2.

Table 4.6.1.8.4.1-2: Initial conditions for EN-DC FR1 event triggered reporting cell without SSB time index detection in DRX for UE configured with highSpeedMeasCA-Scell-r17

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.6.1.8.4.1-3.
2. Message contents are defined in clause 4.6.1.8.4.3.
3. There are four cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as deactivated SCell in FR1 on NR RF channel 2 and NR cell 4 as neighbour cell on NR RF channel 2.

Table 4.6.1.8.4.1-3: General test parameters for EN-DC FR1 event triggered reporting cell without SSB time index detection in DRX for UE configured with highSpeedMeasCA-Scell-r17

Parameter	Unit	Test configuration	Value	Comment
highSpeedMeasCA-Scell-r17		Config 1,2,3,4,5,6	Present	To enable high speed measurement enhancements
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Deactivated Scell		Config 1,2,3,4,5,6	NR cell 3	NR cell 3 is on NR RF channel number 2.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 4	NR cell 4 is on NR RF channel number 2.
A6-Offset	dB	Config 1,2,3,4,5,6	-4.5	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
Measurement gap pattern Id			OFF	
SCell measurement cycle (measCycleSCell)		Config 1,2,3,4,5,6	160 ms	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering not used

DRX		Config 1,2,3,4,5,6	DRX.14	
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs	Synchronous EN-DC
Time offset between PSCell and deactivated SCell		Config 1,4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μs	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	1	

4.6.1.8.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3 and cell 4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Configure MCG and SCG according to clause C.1 for all downlink physical channels.
3. The SS shall configure the PCell (LTE Cell 1), PSCell (NR Cell 2) and the deactivated SCell (NR Cell 3) on the MCG and SCG as per TS 38.508-1 [14] clause 4.5 with the message content exceptions defined in clause 4.6.1.8.4.3.
4. Set the parameters according to T1 in Table 4.6.1.8**.**4.1**-**2. Propagation conditions are set according to Annex C clauses C.2.2
5. The SS shall transmit an *RRCConnectionReconfiguration* message with event A6 configured for NR cell 4.
6. The UE shall transmit an *RRCConnectionReconfigurationComplete* message. T1 starts.
7. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.1.8**.**4.1**-**2.
8. UE shall transmit a *MeasurementReport* message triggered by Event A6 for NR Cell 4 on PCell (LTE Cell 1). If the measurement reporting delay from the beginning of time period T2 is less than 1602 ms the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement, then the number of failure tests is increased by one.
9. The SS waits until the *MeasurementReport* message is received or when T2 expires.
10. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.
11. Set Cell 3 physical cell identity = [((current cell 3 physical cell identity + 3) mod 1008)] for next iteration of the test procedure loop.
12. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.
13. If any the reconfiguration fails, switch off and on the UE and proceed with step 1. Otherwise proceed with step 2.
14. Repeat steps 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.1.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.1.8.4.3-1: Common Exception messages for Additional EN-DC FR1 event triggered reporting cell without SSB time index detection in DRX for UE configured with highSpeedMeasCA-Scell-r17

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.1-7 Table H.3.7-1 with Condition DRX.14 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2
Specific message contents exceptions for Test Configuration 4.6.1.8-1 and 4.6.1.8-4	Table H.3.1-3 with Condition SSB.1 FR1 and Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.6.1.8-2 and 4.6.1.8-5	Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.6.1.8-3 and 4.6.1.8-6	Table H.3.1-3 with Condition SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.6.1.8.4.3-2: *ReportConfigNR-DEFAULT*(a6-offset): NR report configuration for event A6

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition EVENT_A6			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA6 SEQUENCE {			
a6-Offset CHOICE {			
rsrp	-9	The actual value is field value * 0.5 dB.	
}			
hysteresis	0		
timeToTrigger	ms0		
}			
}			
}			
}			
}			

Table 4.6.1.8.4.3-3: *ServingCellConfigCommon*

Derivation Path: TS 38.508-1[14], Table 4.6.3-168 with condition R17 HST FR1			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
HighSpeedConfig-v1700 SEQUENCE {			
highSpeedMeasCA-Scell-r17	true		
}			
}			

Table 4.6.1.8.4.3-4: *MeasObjectNR-DEFAULT*: measCycleSCell configuration for SCell intra-frequency measurements

Derivation Path: TS 38.508-1 [14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
measCycleSCell-v1530	sf160		
}			

4.6.1.8.5 Test requirement

Table 4.6.1.8.5-1 defines the primary level settings including test tolerances for EN-DC FR1 event triggered reporting.

Table 4.6.1.8.5-1: NR cell specific test parameters for EN-DC FR1 event triggered reporting cell without SSB time index detection in DRX for UE configured with highSpeedMeasCA-Scell-r17

Parameter	Unit	Test configuration	Cell 2		Cell 3		Cell 4	
			T1	T2	T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2		2	
Duplex mode		Config 1,4	FDD				FDD	
		Config 2,3,5,6	TDD				TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52				10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52				10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52				10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52				10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106	
TDD configuration		Config 2,5	TDDConf.1.1		TDDConf.1.1		TDDConf.1.1	
		Config 3,6	TDDConf.2.1		TDDConf.2.1		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA		NA	
		Config 2,5	TRS.1.1 TDD		NA		NA	
		Config 3,6	TRS.1.2 TDD		NA		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		SR.1.1 FDD		SR.1.1 FDD	
		Config 2,5	SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
		Config 3,6	SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		CR.1.1 FDD		CR.1.1 FDD	
		Config 2,5	CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
		Config 3,6	CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		CCR.1.1 FDD		CCR.1.1 FDD	
		Config 2,5	CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
		Config 3,6	CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1		SSB.5 FR1	
		Config 2,5	SSB.1 FR1		SSB.5 FR1		SSB.5 FR1	
		Config 3,6	SSB.2 FR1		SSB.6 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2		SMTC.5		SMTC.5	
		Config 2,3,5,6	SMTC.1		SMTC.4		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15					
		Config 3,6	30					
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0		0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								

EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	dBm/ 15kHz		-98		-98		-98		
N_{oc} Note2	dBm/ SCS	Config 1,2,4,5	-98		-98		-98		
		Config 3,6	-95		-95		-95		
SS-RSRP Note 3	dBm/ SCS	Config 1,2,4,5	-94	-94	-94	-94	-Infinity	-94	
		Config 3,6	-91	-91	-91	-91	-Infinity	-91	
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	4	-1.46	-Infinity	-1.46	
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	4	4	-Infinity	4	
Io Note3	dBm/ 9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-64.59	-62.26	-64.59	-62.26	
	dBm/ 38.16 MHz	Config 3,6	-58.49	-58.49	-58.49	-56.15	-58.49	-56.15	
Propagation Condition		Config 1,2,4,5	AWGN		AWGN		AWGN 1944Hz Note 5		
		Config 3,6	AWGN		AWGN		AWGN 3334Hz Note 6		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.

Note 6: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

The UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 1600 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test is 2ms higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.2 Inter-frequency measurements

4.6.2.0 Minimum conformance requirements for Inter-frequency measurements

The requirements in clause 9.3 apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clauses 10.1.4 and 10.1.5 for FR1 and FR2, respectively, for a corresponding Band,

- SS-RSRQ related side conditions given in clauses 10.1.9 and 10.1.10 for FR1 and FR2, respectively, for a corresponding Band,

- SS-SINR related side conditions given in clauses 10.1.14 and 10.1.15 for FR1 and FR2, respectively, for a corresponding Band,

- SSB_RP and SSB Ês/Iot according to clause B.2.3 for a corresponding Band.

[TS 38.133-f50, clause 9.3.4]

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$.

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter}) \text{ ms}$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 4.6.2.0-1 and table 4.6.2.0-4 when *highSpeedMeasInterFreq-r17* is configured and UE supports measurementEnhancementInterFreq-r17.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 4.6.2.0-3 and 4.6.2.0-5 when *highSpeedMeasInterFreq* is configured and UE supports measurementEnhancementInterFreq-r17.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 4.6.2.0-6.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 4.6.2.0-6 and table 4.6.2.0-7 when *highSpeedMeasInterFreq* is configured and UE supports [measurementEnhancementInterFreq-r17.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in TS 38.133 [6] section 9.1.5.2 for measurement conducted within measurement gaps.

Table 4.6.2.0-1: Time period for PSS/SSS detection, (Frequency range FR1)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	$\text{Max}(600\text{ms}, 8 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$\text{Max}(600\text{ms}, \text{Ceil}(8*1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter}$
DRX cycle > 320ms	$8 \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1. NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 4.6.2.0-2 FFS

Table 4.6.2.0-3: Time period for time index detection (Frequency range FR1)

Condition NOTE1,2	$T_{SSB_time_index_inter}$
No DRX	$\text{Max}(120\text{ms}, 3 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$\text{Max}(120\text{ms}, \text{Ceil}(3 \times 1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter}$
DRX cycle > 320ms	$3 \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 4.6.2.0-4: Time period for PSS/SSS detection when highSpeedMeasInterFreq-r17 is configured (Frequency range FR1)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	max(600ms, N1 × Max(MGRP, SMTC period)) × $CSSF_{inter}$ N1 = 7
DRX cycle ≤ 160ms	max(600ms, ceil(N2) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$ N2 = 7 x M2
160ms < DRX cycle ≤ 320ms	ceil(N3) x DRX cycle x $CSSF_{inter}$ N3 = 7 x M2
DRX cycle>320ms	N4 x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1 NOTE 3: N4=6 if SMTC periodicity > 40 ms, otherwise N4=5	

Table 4.6.2.0-5: Time period for time index detection when highSpeedMeasInterFreq-r17 is configured (Frequency range FR1)

Condition NOTE1,2	$T_{SSB_time_index_inter}$
No DRX	Max(120ms, 3 × Max(MGRP, SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 320ms	Max(120ms, Ceil(3 × M2 NOTE3) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320ms	3 × DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1.	

[TS 38.133-f50, clause 9.3.5]

When measurement gaps are provided for inter frequency measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in TS 38.133 subclauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 4.6.2.0-6. When *highSpeedMeasInterFreq-r17* is configured, and UE supports *measurementEnhancementInterFreq-r17*, $T_{SSB_measurement_period_inter}$ is specified in Table 4.6.2.0-7:

Table 4.6.2.0-6: Measurement period for inter-frequency measurements with gaps (Frequency FR1)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	Max(200ms, 8 × Max(MGRP, SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 320ms	Max(200ms, Ceil(8 × 1.5) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320ms	8 × DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 4.6.2.0-7: Measurement period for inter-frequency measurements with gaps when highSpeedMeasInterFreq-r17 is configured (Frequency range FR1)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, 7 × Max(MGRP, SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 160ms	max(200ms, ceil(7 x M2 NOTE3) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
160ms < DRX cycle ≤ 320ms	ceil(7 x M2 NOTE3) x DRX cycle x $CSSF_{inter}$
DRX cycle>320ms	4 x M2 NOTE3 x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the	

	one used by the cell being identified
NOTE 2:	In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.
NOTE 3:	M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1

[TS 38.133, clause 9.3.6.3]

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in sections 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. Both $T_{identify_inter_without_index}$ and $T_{identify_inter_with_index}$ are defined in clause 9.3.4. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ defined in clause 9.3.4 and then triggers the measurement report as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_inter}$ defined in clause 9.3.5 provided the timing to that cell has not changed more than ± 3200 Tc while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clause 9.3.2, 9.3.4, 9.3.5, 9.3.6.3.

4.6.2.1 EN-DC FR1-FR1 event-triggered reporting in non-DRX

4.6.2.1.1 Test purpose

To verify that the UE makes correct reporting of an event in non-DRX within EN-DC inter-frequency NR cell search requirements without SSB time index detection in TS 38.133 [6] clause 9.3.4.

4.6.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

4.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.2.1.

4.6.2.1.4 Test description

4.6.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.2.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.2.1.4.1-2. Test environment parameters are given in Table 4.6.2.1.4.1-3.

Table 4.6.2.1.4.1-1: EN-DC FR1-FR1 event triggered reporting tests in non-DRX supported test configurations

Test Case ID	Description
4.6.2.1-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode

4.6.2.1-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.2.1-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.6.2.1-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.2.1-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.2.1-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations NOTE 2: The target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table 4.6.2.1.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	As specified in TS 38.133 clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μs	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	1	

Table 4.6.2.1.4.1-3: Test Environment test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part	

1. Message contents are defined in clause 4.6.2.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 are set according to clause C.1.2 and clause C.1.3. Cell 3 is switched off during the initial connection setup.

4.6.2.1.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 4.6.2.1.4.1-2.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit RRCConnectionReconfigurationComplete message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.2.1.4.1-2. T2 starts.
6. UE shall transmit a MeasurementReport message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than 920 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.
8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.2.1.4.3-1: Common Exception messages for Additional EN-DC FR1-FR1 event triggered reporting tests in non-DRX test requirement

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9
Specific message contents exceptions for Test Configuration 4.6.2.1-1 and 4.6.2.1-4	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 4.6.2.1-2 and 4.6.2.1-5	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 4.6.2.1-3 and 4.6.2.1-6	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

Table 4.6.2.1.4.3-2: SchedulingRequest-Config for E-UTRAN PCell

Derivation Path: 36.508 [25], Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	23		TDD
}			
}			

4.6.2.1.5 Test requirement

Table 4.6.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.2.1.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
TDD configuration		Config 2,5	TDDConf.1.1		TDDConf.1.1	
		Config 3,6	TDDConf.2.1		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
OCNG Patterns		Config 1,2,3,4,5,6	OP.1		OP.1	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2,5	TRS.1.1 TDD		NA	
		Config 3,6	TRS.1.2 TDD		NA	

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR 2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR 2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR 2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2,5	SSB.1 FR1		SSB.5 FR1	
		Config 3,6	SSB.2 FR1		SSB.6 FR1	
SMTC configuration		Config 1,4	SMTC.2		SMTC.5	
		Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN		AWGN	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.2.2 EN-DC FR1-FR1 event-triggered reporting in DRX

4.6.2.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in DRX within EN-DC inter-frequency NR cell search requirements without SSB time index detection in TS 38.133 [6] clause 9.3.4.

4.6.2.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR1 and long DRX cycle.

4.6.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.2.2.

4.6.2.2.4 Test description

4.6.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.2.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.2.2.4.1-2. Test environment parameters are given in Table 4.6.2.2.4.1-3.

Table 4.6.2.2.4.1-1: EN-DC FR1-FR1 event triggered reporting tests in DRX supported test configurations

Test Case ID	Description
4.6.2.2-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.2.2-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.2.2-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.6.2.2-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.2.2-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.2.2-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: The target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2.	

Table 4.6.2.2.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0		As specified in TS 38.133 clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX	ms	Config 1,2,3,4,5,6	DRX.1	DRX.7	As specified in A.5
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	1.1	11	

Table 4.6.2.2.4.1-3: Test Environment parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.1 for DUT Part. and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 4.6.2.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and are set according to clause C.1.2 and clause C.1.3. Cell 3 is switched off during the initial connection setup.

4.6.2.2.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 4.6.2.2.4.1-2 and Table 4.6.2.2.5-1.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.2.2.5-1. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 1080 ms for Test 1 or 10240 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.2.2.4.3-1: Common Exception messages for Additional EN-DC FR1-FR1 event triggered reporting with SSB test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 and Gap and INTER-FREQ for Test 1 Table H.3.7-1 with Condition DRX.7 and Gap and INTER-FREQ for Test 2 Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9

Specific message contents exceptions for Test Configuration 4.6.2.2-1 and 4.6.2.2-4	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 4.6.2.2-2 and 4.6.2.2-5	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 4.6.2.2-3 and 4.6.2.2-6	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

Table 4.6.2.2.4.3-2: SchedulingRequest-Config for E-UTRAN PCell

Derivation Path: 36.508 [25], Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	23		TDD
}			
}			

4.6.2.2.5 Test requirement

Table 4.6.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.2.2.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
TDD configuration		Config 2,5	TDDConf.1.1		TDDConf.1.1	
		Config 3,6	TDDConf.2.1		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2,5	TRS.1.1 TDD		NA	
		Config 3,6	TRS.1.2 TDD		NA	
OCNG Patterns		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR 2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR 2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR 2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2,5	SSB.1 FR1		SSB.5 FR1	

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
		Config 3,6	SSB.2 FR1		SSB.6 FR1	
SMTC configuration		Config 1,4	SMTC.2		SMTC.5	
		Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN		AWGN	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.2.3 Void

4.6.2.4 Void

4.6.2.5 EN-DC FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection

4.6.2.5.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in non-DRX within EN-DC inter-frequency NR cell search requirements with SSB time index detection in TS 38.133 [6] clause 9.3.4.

4.6.2.5.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

4.6.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.2.3.

4.6.2.5.4 Test description

4.6.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.2.5.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.2.5.4.1-2. Test environment parameters are given in Table 4.6.2.5.4.1-3.

Table 4.6.2.5.4.1-1: EN-DC FR1-FR1 event triggered reporting tests in non-DRX with SSB time index detection supported test configurations

Test Case ID	Description
4.6.2.5 -1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.2.5 -2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.2.5 -3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.6.2.5 -4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.2.5 -5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.2.5 -6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: The target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2.	

Table 4.6.2.5.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	As specified in TS 38.133 clause 9.1.2-1.

Parameter	Unit	Test configuration	Value	Comment
Measurement gap offset		Config 1,2,3,4,5,6	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3μs	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	1.1	

Table 4.6.2.5.4.1-3: Test Environment parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.1 for DUT Part. and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 4.6.2.5.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and are set according to clause C.1.2 and clause C.1.3. Cell 3 is switched off during the initial connection setup.

4.6.2.5.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 4.6.2.5.4.1-2.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.2.5.4.1-2. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 1040 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.)

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.2.5.4.3-1: Common Exception messages for Additional EN-DC FR1-FR1 event triggered reporting tests in non-DRX with SSB test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB and with Condition SSB Index Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ and SSB Index Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9
Specific message contents exceptions for Test Configuration 4.6.2.5-1 and 4.6.2.5-4	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 4.6.2.5-2 and 4.6.2.5-5	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 4.6.2.5-3 and 4.6.2.5-6	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

Table 4.6.2.5.4.3-2: SchedulingRequest-Config for E-UTRAN PCell

Derivation Path: 36.508 [25], Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	23		TDD
}			
}			

4.6.2.5.5 Test requirement

Table 4.6.2.5.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.2.5.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
TDD configuration		Config 2,5	TDDConf.1.1		TDDConf.1.1	
		Config 3,6	TDDConf.2.1		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2,5	TRS.1.1 TDD		NA	
		Config 3,6	TRS.1.2 TDD		NA	
OCNG Patterns		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR 2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR 2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR 2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2,5	SSB.1 FR1		SSB.5 FR1	
		Config 3,6	SSB.2 FR1		SSB.6 FR1	
SMTC configuration		Config 1,4	SMTC.2		SMTC.5	
		Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN		AWGN	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.2.6 EN-DC FR1-FR1 event-triggered reporting in DRX with SSB time index detection

4.6.2.6.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in DRX within EN-DC inter-frequency NR cell search requirements with SSB time index detection in TS 38.133 [6] clause 9.3.4.

4.6.2.6.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR1 and long DRX cycle.

4.6.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.2.6.

4.6.2.6.4 Test description

4.6.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.2.6.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.2.6.4.1-2. Test environment parameters are given in Table 4.6.2.6.4.1-3.

Table 4.6.2.6.4.1-1: EN-DC FR1-FR1 event triggered reporting tests in DRX with SSB time index detection supported test configurations

Test Case ID	Description
4.6.2.6-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.2.6-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.2.6-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.6.2.6-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.2.6-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.2.6-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: The target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2.	

Table 4.6.2.6.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0		As specified in TS 38.133 clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX	ms	Config 1,2,3,4,5,6	DRX.1	DRX.7	As specified in clause A.5
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs		Synchronous EN-DC

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	1.3	13.5	

Table 4.6.2.6.4.1-3: Test Environment parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.1 for DUT Part. and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 4.6.2.6.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and are set according to clause C.1.2 and clause C.1.3. Cell 3 is switched off during the initial connection setup.

4.6.2.6.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 4.6.2.6.4.1-2 and Table 4.6.2.6.5-1.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.2.6.5-1. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 1280 ms for Test 1 or 12160 ms for Test 2, then the number of successful tests is increased by one. If the

UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.]

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.2.6.4.3-1: Common Exception messages for Additional EN-DC FR1-FR1 event triggered reporting in DRX with SSB test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB and with Condition SSB Index Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ and SSB Index Table H.3.7-1 with Condition DRX.1 and Gap and INTER-FREQ for Test 1 Table H.3.7-1 with Condition DRX.7 and Gap and INTER-FREQ for Test 2 Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9
Specific message contents exceptions for Test Configuration 4.6.2.6-1 and 4.6.2.6-4	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 4.6.2.6-2 and 4.6.2.6-5	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 4.6.2.6-3 and 4.6.2.6-6	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

Table 4.6.2.6.4.3-2: SchedulingRequest-Config for E-UTRAN PCell

Derivation Path: 36.508 [25], Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	23		TDD
}			
}			

4.6.2.6.5 Test requirement

Table 4.6.2.6.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.2.6.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52			
		Config 2,5	10: $N_{RB,c}$ = 52			
		Config 3,6	40: $N_{RB,c}$ = 106			
OCNG Patterns		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR 2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR 2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR 2.1 TDD			
TDD configuration		Config 2,5	TDDConf.1.1			
		Config 3,6	TDDConf.2.1			
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1			
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1			
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1			
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1			
TRS configuration		Config 1,4	TRS.1.1 FDD		N/A	
		Config 2,5	TRS.1.1 TDD		N/A	
		Config 3,6	TRS.1.2 TDD		N/A	
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2,5	SSB.1 FR1		SSB.5 FR1	
		Config 3,6	SSB.2 FR1		SSB.6 FR1	
SMTC configuration		Config 1,4	SMTC.2		SMTC.5	
		Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN		AWGN	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%. with a confidence level of 95%.

In test 1 and 2, UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.2.7 Void

4.6.2.8 Void

4.6.2.9 EN-DC FR1-FR1 event triggered reporting without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17

4.6.2.9.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event for UE configured with highSpeedMeasInterFreq-r17. This test will partly verify the EN-DC inter-frequency NR cell search requirements in TS 38.133 [6] clause 9.3.4.

4.6.2.9.2 Test applicability

This test applies to all types of E-UTRA UE release 17 and forward supporting enhanced inter-frequency NR measurement requirements in high-speed scenario (measurementEnhancementInterFreq-r17, as defined in TS 38.306).

4.6.2.9.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.6.2.0

The normative reference for this requirement is TS 38.133 [6] clause 4.6.2.9

4.6.2.9.4 Test description

4.6.2.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.2.9.4.1-1.

Table 4.6.2.9.4.1-1: Supported test configurations for EN-DC FR1-FR1 event triggered reporting without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17

Configuration	Description
4.6.2.9-1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
4.6.2.9-2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
4.6.2.9-3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4.6.2.9-4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
4.6.2.9-5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
4.6.2.9-6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Configure the test equipment and the DUT according to the parameters in Table 4.6.2.9.4.1-2.

Table 4.6.2.9.4.1-2: Initial conditions for EN-DC FR1-FR1 event triggered reporting without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.2.9.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 4.6.2.9.4.1-3.
2. Message contents are defined in clause 4.6.2.9.4.3.
3. There are three cells in the test, LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2.

Table 4.6.2.9.4.1-3: General test parameters for EN-DC FR1-FR1 event triggered reporting without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies is used.

Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX	ms	Config 1,2,3,4,5,6	DRX.14	As specified in clause A.5
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3μs	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	3	

4.6.2.9.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure MCG and SCG according to clause C.1 for all downlink physical channels.

3. The SS shall configure the PCell (LTE Cell 1), PSCell (NR Cell 2) on the MCG and SCG as per TS 38.508-1 [14] clause 4.5 with the message content exceptions defined in clause 4.6.2.9.4.3.

4. Set the parameters according to T1 in Table 4.6.2.9.4.1-2 and Table 4.6.2.9.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

5. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1 with event A3 configured for NR cell 3.

6. The UE shall transmit *RRCConnectionReconfigurationComplete* message. T1 starts.

7. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.2.9.5-1. T2 starts.

8. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 2242 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

9. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25]

Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

10. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE proceeds with step 1. Otherwise proceed with step 2.

11. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.2.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.2.9.4.3-1: Common Exception messages for EN-DC FR1-FR1 event triggered reporting without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.14 Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9
Specific message contents exceptions for Test Configuration 4.6.2.9-1 and 4.6.2.9-4	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 4.6.2.9-2 and 4.6.2.9-5	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 4.6.2.9-3 and 4.6.2.9-6	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

Table 4.6.2.9.4.3-2: ServingCellConfigCommon

Derivation Path: TS 38.508-1[14], Table 4.6.3-168 with condition R17 HST FR1			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
HighSpeedConfig-v1700 SEQUENCE {			
highSpeedMeasInterFreq-r17	true		
}			
}			

4.6.2.9.5 Test requirement

Table 4.6.2.9.5-1 defines the primary level settings including test tolerances for EN-DC FR1-FR1 event triggered reporting without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17.

Table 4.6.2.9.5-1: NR cell specific test parameters for EN-DC FR1-FR1 event triggered reporting without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			

		Config 2,3,5,6	TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52	
		Config 2,5	10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106	
TDD configuration		Config 2,5	TDDConf.1.1	
		Config 3,6	TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA
TRS configuration		Config 1,4	TRS.1.1 FDD	NA
		Config 2,5	TRS.1.1 TDD	NA
		Config 3,6	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	-
		Config 2,5	SR.1.1 TDD	
		Config 3,6	SR2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD	-
		Config 2,5	CR.1.1 TDD	
		Config 3,6	CR2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	-
		Config 2,5	CCR.1.1 TDD	
		Config 3,6	CCR.2.1 TDD	
SSB parameters		Config 1,4	SSB.1 FR1	SSB.5 FR1
		Config 2,5	SSB.1 FR1	SSB.5 FR1
		Config 3,6	SSB.2 FR1	SSB.6 FR1
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.5
		Config 2,3,5,6	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	
		Config 3,6	30	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz		-98	-98
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98	-98
		Config 3,6	-95	-95

SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16 MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2, 4,5	AWGN		AWGN 1944Hz Note 5	
		Config 3,6			AWGN 3334Hz Note 6	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.
Note 6: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 2240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

UE is not required to report SSB time index.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The actual overall delays measured in the test is 2ms higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.3 Void

4.6.4 L1-RSRP measurement for beam reporting

4.6.4.0 Minimum conformance requirements

4.6.4.0.1 Minimum conformance requirements for SSB-based L1-RSRP measurement for beam reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ is defined in Table 4.6.4.0.1-1 for FR1,

where

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise

For FR1,

- $P=\frac{1}{1-\frac{T_{SSB}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

Where:

T_{SSB} = ssb-periodicityServingCell

$T_{SMTCperiod}$ = the configured SMTC period

If the high layer in TS 38.331 [13] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 4.6.4.0.1-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
NOTE 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
NOTE 2: K = 1 when T_{SSB} ≤ 40 ms and *highSpeedMeasFlag-r16* are configured; otherwise K = 1.5.	

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19 for FR1 and 10.1.20 for FR2 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19 for FR1 and 10.1.20 for FR2. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 36.214 [24].

The UE is required to be capable of measuring SSB and CSI-RS for L1-RSRP without measurement gaps. The UE is required to perform the SSB and CSI-RS measurements with measurement restrictions as described in the following clauses.

For FR1, when the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM/BFD/CBD/L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;

- If SSB and CSI-RS have different SCS,

  - If UE supports simultaneousRxDataSSB-DiffNumerology, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;

  - If UE does not support simultaneousRxDataSSB-DiffNumerology, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

The normative reference for this requirement is TS 38.133 [6] clause 9.5.3.1, 9.5.4.1 and 9.5.5.1.

4.6.4.0.2 Minimum conformance requirements for CSI-RS-based L1-RSRP measurement for beam reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ is defined in Table 4.6.4.0.2-1for FR1, where

- For periodic and semi-persistent CSI-RS resources, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise

- For aperiodic CSI-RS resources M=1

- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with

  - SSB for L1-RSRP measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured with QCL-TypeD for all resources in the resource set.

- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource one RS has QCL-TypeD with

  - SSB for L1-RSRP measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided with QCL-TypeD for all resources in the resource set in the MAC CE activating the resource set.

- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource one RS has QCL-TypeD with

  - SSB for L1-RSRP measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.19.2 and 10.1.20.2 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured with QCL-TypeD for all resources in the resource set.

For FR1,

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

Where:

T_{CSI-RS} = the periodicity of CSI-RS configured for L1-RSRP measurement

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 4.6.4.0.2-1: Measurement period $T_{L1-RSRP_Measurement_Period_CSI-RS}$ for FR1

Configuration	$T_{L1-RSRP_Measurement_Period_CSI-RS}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{CSI-RS})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P)*max(T_{DRX},T_{CSI-RS}))
DRX cycle > 320ms	ceil(M*P)*T_{DRX}
NOTE 1: T_{CSI-RS} is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. NOTE 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3. NOTE 3: K = 1 when T_{CSI-RS} ≤ 40 ms and *highSpeedMeasFlag-r16* are configured; otherwise K = 1.5.	

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19 for FR1 and 10.1.20 for FR2 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19 for FR1 and 10.1.20 for FR2. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send aperiodic L1-RSRP measurement reports, if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.2.1.2 in TS 36.300 [24].

For both FR1 and FR2, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM/BFD/CBD/L1-RSRP measurement, UE is not required to receive CSI-RS for L1-RSRP measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM/BFD/CBD/L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM/BFD/CBD/L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as another CSI-RS for RLM/BFD/CBD/L1-RSRP measurement, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clauses 9.5.3.1, 9.5.4.2 and 9.5.5.2.

4.6.4.1 EN-DC FR1 SSB-based L1-RSRP measurement in non-DRX

4.6.4.1.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.1.

4.6.4.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

4.6.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.4.1.

4.6.4.1.4 Test description

4.6.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.4.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.4.1.4.1-2. Test environment parameters are given in Table 4.6.4.1.4.1-3.

Table 4.6.4.1.4.1-1: EN-DC SSB based L1-RSRP measurement supported test configurations

Test Case ID	Description
4.6.4.1-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.4.1-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.4.1-3	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.6.4.1-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.4.1-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.4.1-6	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table 4.6.4.1.4.1-2: General test parameters for EN-DC SSB based L1-RSRP measurement

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1

Parameter	Config	Unit	Value
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		Off
reportConfigType	1~6		periodic
reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
L1-RSRP reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
NOTE: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 4.6.4.1.4.1-3: Test Environment parameters for EN-DC SSB based L1-RSRP measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 4.6.4.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for SSB based L1-RSRP measurements. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

4.6.4.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 4.6.4.1.4.1-2. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 4.6.4.1.4.1-2.

2. Set the parameters according to T1 in Table 4.6.4.1.5-1. T1 starts.

5. The UE shall be transmitting CSI on PUCCH with a periodicity of 80 slots.

6. When T1 expires, the SS shall set the parameters according to T2 in 4.6.4.1.5-1. T2 starts.

7. The UE shall start sending L1-RSRP reports. The SS shall check following requirements:

   R1: the UE shall start to transmit valid reports no later than 720 ms for configuration 1, 2, 4 and 5 and no later than 680 ms for configuration 3 and 6 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 (Table 4.6.4.1.5-2 for test configurations 1, 2, 4 and 5 and Table 4.6.4.1.5-3 for test configurations 3 and 6) and the relative L1-RSRP requirement for SSB#0 in Table 4.6.4.1.5-4. If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 4.6.4.1.5-2 for test configurations 1, 2, 4 and 5 and in Table 4.6.4.1.5-3 for test configurations 3 and 6 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   R4: The DIFF RSRP value of SSB#0 reported by the UE is compared to the expected DIFF RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 4.6.4.1.5-4 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

8. The SS waits until T2 expires.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

10. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

11. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

12. Repeat steps 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.4.1.4.3-1: Common Exception messages EN-DC SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with conditions SSB and PERIODIC Table H.3.6-10 Table H.3.4-1

Table 4.6.4.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

4.6.4.1.5 Test requirement

Table 4.6.4.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.4.1.5-1: SSB specific test parameters for EN-DC SSB based L1-RSRP measurement

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~6	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4,5	dBm/SSB SCS	-94.65			
	3,6		-91.65			
$\hat{E}_s / I_{ot}$	1~6	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.15
	3,6		-91.65	-91.65	-Infinity	-88.14
Io Note3	1,2,4,5	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.59
	3,6	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1~6	dB	0	0	-Infinity	3.5

The UE shall send L1-RSRP report every 80 slots. After 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 4.6.4.1.5-2 for for test configurations 1, 2, 4 and 5, the corresponding absolute accuracy requirements in Table 4.6.4.1.5-3 for test configurations 3 and 6 and the corresponding relative accuracy requirements in Table 4.6.4.1.5-4 for all test configurations.

Table 4.6.4.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	55
Highest reported value (SSB#1)	-	75

Table 4.6.4.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 4.6.4.1.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.4.2 EN-DC FR1 SSB-based L1-RSRP measurement in DRX

4.6.4.2.1 Test purpose

To verify that the UE makes correct reporting of SSB-based L1-RSRP measurement in DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.1.

4.6.4.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR1 and long DRX cycle.

4.6.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.4.2.

4.6.4.2.4 Test description

4.6.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.4.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.4.2.4.1-2. Test environment parameters are given in Table 4.6.4.2.4.1-3.

Table 4.6.4.2.4.1-1: EN-DC SSB based L1-RSRP measurement in DRX supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table 4.6.4.2.4.1-2: General test parameters for EN-DC SSB based L1-RSRP measurement in DRX

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		DRX.3
reportConfigType	1~6		periodic
reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
L1-RSRP reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
NOTE: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 4.6.4.2.4.1-3: Test Environment parameters for EN-DC SSB based L1-RSRP measurement in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.4.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 4.6.4.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for SSB based L1-RSRP measurements. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. DRX is configured as specified in Table 4.6.4.2.4.1-2.

4.6.4.2.4.2 Test procedure

Same test procedure as in subclause 4.6.4.1.4.2 with tables 4.6.4.1.4.1-2 and 4.6.4.1.5-1 replaced by tables 4.6.4.2.4.1-2 and 4.6.4.2.5-1.

4.6.4.2.4.3 Message contents

Same message content as in subclause 4.6.4.1.4.3 with the following exception:

Table 4.6.4.2.4.3-1: Common Exception messages EN-DC SSB based L1-RSRP measurement in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3

4.6.4.2.5 Test requirement

Table 4.6.4.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.4.2.5-1: SSB specific test parameters for EN-DC SSB based L1-RSRP measurement in DRX

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~6	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4,5	dBm/SSB SCS	-94.65			
	3,6		-91.65			
$\hat{E}_s/I_{ot}$	1~6	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.15
	3,6		-91.65	-91.65	-Infinity	-88.14
Io Note3	1,2,4,5	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.59
	3,6	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s/N_{oc}$	1~6	dB	0	0	-Infinity	3.5
NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for						

N_{oc} to be fulfilled.

NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 4.6.4.2.5-2 for for test configurations 1, 2, 4 and 5, the corresponding absolute accuracy requirements in Table 4.6.4.2.5-3 for test configurations 3 and 6 and the corresponding relative accuracy requirements in Table 4.6.4.2.5-4 for all test configurations.

Table 4.6.4.2.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	55
Highest reported value (SSB#1)	-	75

Table 4.6.4.2.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 4.6.4.2.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.4.3 EN-DC FR1 CSI-RS-based L1-RSRP measurement in non-DRX

4.6.4.3.1 Test purpose

To verify that the UE makes correct reporting of CSI-RS-based L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.2.

4.6.4.3.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

4.6.4.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.4.3.

4.6.4.3.4 Test description

4.6.4.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.4.3.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.4.3.4.1-2. Test environment parameters are given in Table 4.6.4.3.4.1-3.

Table 4.6.4.3.4.1-1: EN-DC CSI-RS based L1-RSRP measurement supported test configurations

Test Case ID	Description
4.6.4.3-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.4.3-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.4.3-3	LTE FDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4.6.4.3-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
4.6.4.3-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
4.6.4.3-6	LTE TDD, NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table 4.6.4.3.4.1-2: General test parameters for EN-DC CSI-RS based L1-RSRP measurement

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2,5		CSI-RS 1.3 TDD
	3,6		CSI-RS 2.3 TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
DRX configuration	1~6		Off
reportConfigType	1~6		aperiodic
reportQuantity	1~6		cri-RSRP
Number of reported RS	1~6		2
qcl-Info	1~6		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	8
T1	1~6	s	5
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			

Parameter	Config	Unit	Value
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
NOTE: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 4.6.4.3.4.1-3: Test Environment parameters for EN-DC CSI-RS L1-RSRP measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.4.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 4.6.4.3.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for CSI-RS based L1-RSRP measurements. Before the test, UE is configured to perform RLM and BFD measurement based on the SSBs.

4.6.4.3.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. UE is also configured to measure L1-RSRP based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in table 4.6.4.3.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 4.6.4.3.5-1. T1 starts.

3. After 80ms from the start of the test the SS transmits the DCI trigger in slot 2 for configuration 1,4, slot 5 for config 2,5 and slot 8 for configuration 3,6. The corresponding CSI-RS set is transmitted with the offset of 0 slots after the DCI trigger.

4. The SS shall check following requirements:

   R1: the UE shall send L1-RSRP report at slot 8 from the reception of DCI trigger. If the report is received at slot 8 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   R2: The L1-RSRP value of CSI-RS#1 reported by the UE is compared to the expected L1-RSRP value for CSI-RS #1. If the resulting value is outside the limits in Table 4.6.4.3.5-2 for test configurations 1, 2, 4 and 5 and in Table 4.6.4.3.5-3 for test configurations 3 and 6 or the UE fails to report the measurement value for

CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

R3: The DIFF RSRP value of CSI-RS #0 reported by the UE is compared to the expected DIFF RSRP value. If the resulting value is outside the limits in Table 4.6.4.3.5-4 or the UE fails to report the measurement value for CSI-RS #0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

5. Void

6. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

7. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

8. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.4.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.4.3.4.3-1: Common Exception messages EN-DC CSI-RS based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	TBD
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions APERIODIC and CSI-RSRP Table H.3.6-3 with conditions CSI-RS and APERIODIC Table H.3.4-1 TS 38.508-1 [14] Table 7.3.1-21 with condition APERIODIC

Table 4.6.4.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

Table 4.6.4.3.4.3-3: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [14], Table 7.2.2.1-1			
Parameter	**Value**	**Value in binary**	**Condition**
PDSCH-to-HARQ_feedback timing indicator	K1 = 3 if mod(i,10) = 8 where i is slot index per frame; i = {0,…,9}	-	Config1,4 (NR FDD)

PDSCH-to-HARQ_feedback timing indicator	K1 = 6 if mod(i,20) = 11 where i is slot index per frame; i = {0,…,19}	-	Config3,6 (NR TDD30kHz)

4.6.4.3.5 Test requirement

Table 4.6.4.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.4.3.5-1: CSI-RS specific test parameters for EN-DC CSI-RS L1-RSRP measurement

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~6	dBm/15kHz	-94.65	
N_{oc} Note1	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s/I_{ot}$	1~6	dB	0	3.5
CSI-RS RSRP Note2	1,2,4,5	dBm/SSB SCS	-94.65	-91.15
	3,6		-91.65	-88.14
Io Note2	1,2,4,5	dBm/9.36 MHz	-63.69	-61.59
	3,6	dBm/38.16 MHz	-57.59	-55.49
$\hat{E}_s/N_{oc}$	1~6	dB	0	3.5

NOTE 1: Void.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the beginning of T2. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 4.6.4.3.5-2 for for test configurations 1, 2, 4 and 5 and the corresponding absolute accuracy requirements in Table 4.6.4.3.5-3 for test configurations 3 and 6 and the corresponding relative accuracy requirements in Table 4.6.4.3.5-4 for all test configurations.

Table 4.6.4.3.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	55
Highest reported value (CSI-RS#1)	75

Table 4.6.4.3.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	58
Highest reported value (CSI-RS#1)	78

Table 4.6.4.3.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1
Lowest DIFF RSRP reported (CSI-RS#0)	0
Highest DIFF RSRP reported (CSI-RS#0)	3

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.4.4 EN-DC FR1 CSI-RS-based L1-RSRP measurement in DRX

4.6.4.4.1 Test purpose

To verify that the UE makes correct reporting of CSI-RS-based L1-RSRP measurement in DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.2.

4.6.4.4.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR1 and long DRX cycle.

4.6.4.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.4.4.

4.6.4.4.4 Test description

4.6.4.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.4.4.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.4.4.4.1-2. Test environment parameters are given in Table 4.6.4.4.4.1-3.

Table 4.6.4.4.4.1-1: EN-DC CSI-RS based L1-RSRP measurement in DRX supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table 4.6.4.4.4.1-2: General test parameters for EN-DC CSI-RS based L1-RSRP measurement in DRX

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD

Parameter	Config	Unit	Value
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2,5		CSI-RS 1.3 TDD
	3,6		CSI-RS 2.3 TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
DRX configuration	1~6		DRX.3
reportConfigType	1~6		aperiodic
reportQuantity	1~6		cri-RSRP
Number of reported RS	1~6		2
qcl-Info	1~6		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	8
T1	1~6	s	5
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS[Note 1]			
EPRE ratio of OCNG to OCNG DMRS [Note 1]			
Propagation condition	1~6		AWGN
NOTE: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 4.6.4.4.4.1-3: Test Environment parameters for EN-DC CSI-RS based L1-RSRP measurement in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.4.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 4.6.4.4.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for CSI-RS based L1-RSRP measurements. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. DRX is configured as specified in Table 4.6.4.4.4.1-2.

4.6.4.4.4.2 Test procedure

Same test procedure as in subclause 4.6.4.3.4.2 with tables 4.6.4.3.4.1-2 and 4.6.4.3.5-1 replaced by tables 4.6.4.4.4.1-2 and 4.6.4.4.5-1.

4.6.4.4.4.3 Message contents

Same message content as in subclause 4.6.4.3.4.3 with the following exception:

Table 4.6.4.4.4.3-1: Common Exception messages EN-DC CSI-RS based L1-RSRP measurement in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3 and Offset

4.6.4.4.5 Test requirement

Table 4.6.4.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.4.4.5-1: CSI-RS specific test parameters for EN-DC SSB based L1-RSRP measurement in DRX

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~6	dBm/15kHz	-94.65	
N_{oc} Note1	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s/I_{ot}$	1~6	dB	0	3.5
CSI-RS RSRP Note2	1,2,4,5	dBm/SSB SCS	-94.65	-91.15
	3,6		-91.65	-88.14
Io Note2	1,2,4,5	dBm/9.36 MHz	-63.69	-61.59
	3,6	dBm/38.16 MHz	-57.59	-55.49
$\hat{E}_s/N_{oc}$	1~6	dB	0	3.5
NOTE 1: Void.				
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
NOTE 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1.

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 4.6.4.4.5-2 for for test configurations 1, 2, 4 and 5, the corresponding absolute accuracy requirements in Table 4.6.4.4.5-3 for test configurations 3 and 6 and the corresponding relative accuracy requirements in Table 4.6.4.4.5-4 for all test configurations.

Table 4.6.4.4.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	T1

Lowest reported value (CSI-RS#1)	55
Highest reported value (CSI-RS#1)	75

Table 4.6.4.4.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	58
Highest reported value (CSI-RS#1)	78

Table 4.6.4.4.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1
Lowest DIFF RSRP reported (CSI-RS#0)	0
Highest DIFF RSRP reported (CSI-RS#0)	3

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.4.5 EN-DC FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The feasibility of configuring different channel models to different SSBs needs further study.

- The TT analysis may need to be redone after concluding if the new test configuration is testable.

4.6.4.5.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement when UE is configured with *highSpeedMeasFlag-r16*.

To verify the L1-RSRP measurement requirements for UE configured with *highSpeedMeasFlag-r16* in TS 38.133 [6] clause 9.5.4.1.

4.6.4.5.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR1, HST enhancement and long DRX cycle.

4.6.4.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.4.5.

4.6.4.5.4 Test description

4.6.4.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.4.5.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.4.5.4.1-2. Test environment parameters are given in Table 4.6.4.5.4.1-3.

Table 4.6.4.5.4.1-1: Supported test configurations for EN-DC FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16

Config	Description
4.6.4.5-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.6.4.5-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.6.4.5-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4.6.4.5-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4.6.4.5-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
4.6.4.5-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table 4.6.4.5.4.1-2: General test parameters for EN-DC FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		DRX.3
reportConfigType	1~6		periodic
reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
L1-RSRP reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	2
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			

Parameter	Config	Unit	Value
DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
NOTE: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 4.6.4.5.4.1-3: Test Environment parameters for EN-DC FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.4.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 4.6.4.5.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for SSB based L1-RSRP measurements. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. DRX is configured as specified in Table 4.6.4.5.4.1-2.

4.6.4.5.4.2 Test procedure

Same test procedure as in subclause 4.6.4.1.4.2 with tables 4.6.4.1.4.1-2 and 4.6.4.1.5-1 replaced by tables 4.6.4.5.4.1-2 and 4.6.4.5.5-1. Step 7 is also replaced by the following step.

7. The UE shall start sending L1-RSRP reports. The SS shall check following requirements:

   R1: the UE shall start to transmit valid reports no later than 720 ms for configuration 1, 2, 4 and 5 and no later than 680 ms for configuration 3 and 6 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 (Table 4.6.4.5.5-2 for test configurations 1, 2, 4 and 5 and Table 4.6.4.5.5-3 for test configurations 3 and 6) and the relative L1-RSRP requirement for SSB#0 in Table 4.6.4.5.5-4. If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 4.6.4.5.5-2 for test configurations 1, 2, 4 and 5 and in Table 4.6.4.5.5-3 for test configurations 3 and 6 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   R4: The DIFF RSRP value of SSB#0 reported by the UE is compared to the expected DIFF RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 4.6.4.5.5-4 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

4.6.4.5.4.3 Message contents

In addition to the same message contents as clause 4.6.4.2.4.3, the following exceptions are also needed:

Table 4.6.4.5.4.3-1: Void

Table 4.6.4.5.4.3-2: Void

Table 4.6.4.5.4.3-3: CellGroupConfig (Step 1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex for Cell 2		
reconfigurationWithSync SEQUENCE {			
spCellConfigCommon	ServingCellConfigCommon	Table 4.6.4.5.4.3-4	
}			
}			
}			

Table 4.6.4.5.4.3-4: ServingCellConfigCommon (Table 4.6.4.5.4.3-3)

Derivation Path: TS 38.508-1[14], Table 4.6.3-168 with condition HST			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
highSpeedConfig-r16 SEQUENCE {			
highSpeedMeasFlag-r16	true		
}			
}			

4.6.4.5.5 Test requirement

Table 4.6.4.5.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.4.5.5-1: SSB specific test parameters for EN-DC FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~6	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4,5	dBm/SSB SCS	-94.65			
	3,6		-91.65			
$\hat{E}_s / I_{ot}$	1~6	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.15
	3,6		-91.65	-91.65	-Infinity	-88.15
Io Note3	1,2,4,5	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.59
	3,6	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1~6	dB	0	0	-Infinity	3.5
Propagation conditions	1,2,4,5		AWGN		AWGN 1944 Hz Note4	
	3,6		AWGN		AWGN 3334 Hz Note5	
NOTE 1 The resources for uplink transmission are assigned to the UE prior to the start of time period T2. NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						

NOTE 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	The AWGN 1944 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.
Note 5:	The AWGN 3334 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 3334 Hz.

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 4.6.4.5.5-2 for test configurations 1, 2, 4 and 5, the corresponding absolute accuracy requirements in Table 4.6.4.5.5-3 for test configurations 3 and 6 and the corresponding relative accuracy requirements in Table 4.6.4.5.5-4 for all test configurations.

Table 4.6.4.5.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	55
Highest reported value (SSB#1)	-	75

Table 4.6.4.5.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 4.6.4.5.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.5 CLI measurements

4.6.5.0 Minimum conformance requirements

4.6.5.0.1 Minimum conformance requirements for SRS-RSRP measurement

The UE shall be capable of performing SRS-RSRP measurement based on the configured SRS resource, and the UE shall be capable of reporting SRS-RSRP measured over measurement period of $T_{SRS_RSRP_measurement_period}$ for FR1 and FR2.

Table 4.6.5.0.1-1 Measurement period $T_{SRS_RSRP_measurement_period}$

Configuration	$T_{SRS_measurement_period}$ (ms)
No DRX	Max(60, 3 X T_{SRS})
DRX cycle ≤ 320ms	Max(60, Ceil(1.5 X 3) X max(T_{SRS}, T_{DRX}))
DRX cycle > 320ms	3 X T_{DRX}
NOTE: T_{SRS} is SRS measurement periodicity configured *SRS-PeriodicityAndOffset*, and T_{DRX} is the DRX cycle length.	

If the SRS resources configured for measurement are partially or fully overlapping with SMTC window, SSB or CSI-RS configured for RLM, BFD, CBD or L1-RSRP measurement or measurement gaps, requirements are not specified for $T_{SRS_RSRP_measurement_period}$.

When configured by the network, the UE shall be able to perform SRS-RSRP measurements of configured *srs-ResourceConfigCLI*. The requirements apply when the subcarrier spacing for SRS-RSRP measurement resource configuration is the same as the subcarrier spacing of the active DL BWP of serving cell. The UE is not required to measure SRS using different SCS compared to the downlink active BWP SCS of the same carrier.

The requirements apply, provided:

- SRS resources configured for SRS-RSRP measurements are measurable.

An SRS resource configured for SRS-RSRP shall be considered measurable when for each relevant SRS the following conditions are met:

- SRS-RSRP related side conditions given in clauses 10.1.22.1 of TS 38.133 [6] for FR1 and FR2 for a corresponding band,
- SRS_RP and SRS Ês/Iot according to Annex B.2.7 of TS 38.133 [6] for a corresponding band.

The UE shall send SRS-RSRP reports only for report configurations according to *reportType* which is *cliPeriodical* or *cliEventTriggered* when SRS-RSRP report is configured.

The UE shall report the SRS-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.22.1 of TS 38.133[6] for FR1 and FR2.

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report on.

The normative reference for this requirement is TS 38.133 [6] clause 9.7.2.5, 9.7.2.1, 9.7.2.2 and 9.7.2.3.3.

4.6.5.0.2 Minimum conformance requirements for CLI-RSSI measurement with non-DRX

The UE shall be capable of performing CLI-RSSI measurement based on the configured measurement resource within TCLI_RSSI_measurement_period. The UE shall be able to provide a single RSSI sample for each measurement resource configured for CLI-RSSI measurement occurring with a configured periodicity. The CLI-RSSI measurement period TCLI_RSSI_measurement_period corresponds to the CLI-RSSI measurement resource periodicity, which is configured for by higher layers via RSSI-PeriodicityAndOffset.

If the CLI-RSSI measurement resources configured for measurement are partially or fully overlapping with SMTC window, SSB or CSI-RS configured for RLM, BFD, CBD or L1-RSRP measurement or measurement gaps, requirements are not specified for TCLI_RSSI_measurement_period.

The UE shall send CLI-RSSI reports only for report configurations according to *reportType* which is *cliPeriodical* or *cliEventTriggered* when CLI-RSSI report is configured.

The requirements apply, provided:

- The measurement resources configured for CLI-RSSI measurements are measurable.

A measurement resource configured for CLI-RSSI shall be considered measurable when for each relevant CLI-RSSI resource the following conditions are met:

- CLI-RSSI related side conditions given in clauses 10.1.22.2 of TS 38.133 [6] for FR1 and FR2 for a corresponding band.

The UE shall report the CLI-RSSI value as a 7-bit value in the range [-100, -25] dBm with 1dB step size according to clause 10.1.22.2 of TS 38.133[6] for FR1 and FR2.

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report on.

The normative reference for this requirement is TS 38.133 [6] clauses 9.7.3.5, 9.7.3.1 and 9.7.3.3.2.

4.6.5.1 EN-DC FR1 SRS-RSRP measurement with non-DRX

Editor's NOTE: This test case is incomplete in following aspects:

- Test Requirements and length of T2 are in brackets as they need further study.

4.6.5.1.1 Test purpose

To verify that the UE makes correct reporting of SRS-RSRP measurement. This test will verify the SRS-RSRP measurement requirements in clause 4.6.5.0.

4.6.5.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting NR EN-DC and CLI-based SRS-RSRP measurements.

4.6.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.5.1.

4.6.5.1.4 Test description

The test scenario comprises of one E-UTRA anchor cell (Cell 1), one serving NR FR1 PSCell (Cell 2) and one virtual intra-frequency UE transmitting SRS periodically, which are the target of the CLI measurement report evaluated in the test. The test parameters for PSCell are given in Table 4.6.5.1.4.1-3 and Table 4.6.5.1.5-1 below. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with event I1 is used. No gap pattern is configured in the test.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table 4.6.5.1.5-3 and the test parameters for the (virtual) neighbour cell UE in Table 4.6.5.1.5-2. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

4.6.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.5.1.4.1-1.

Table 4.6.5.1.4.1-1: Supported test configurations for EN-DC FR1 SRS-RSRP measurement with non-DRX

Configuration	Description
4.6.5.1-1	NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
4.6.5.1-2	NR 30 kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.6.5.1.4.1-2.

Table 4.6.5.1.4.1-2: Initial conditions for EN-DC FR1 SRS-RSRP measurement with non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 4.6.5.1.4.3.

2. Cell 1 is the E-UTRA anchor cell for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR cell (PSCell) with power levels and settings according to Annex C.1.2 and C.1.3. Virtual UE 1 is the target for SRS-RSRP measurements.

3. The test parameters are given in Table 4.6.5.1.4.1-3.

Table 4.6.5.1.4.1-3: General test parameters for EN-DC FR1 SRS-RSRP measurement with non-DRX

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1, 2	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.2 FR1	
SMTC configuration		1	SMTC.1	
		2	SMTC.1	
SRS configuration		1	SRSConf.1	Table 4.6.5.1.5-3
		2	SRSConf.2	
CP length		1, 2	Normal	
i1-Threshold	dBm	1	-97	
		2	-95	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	Non-DRX
Time offset between DL from serving cell and SRS from test system	µs	1,2	17.67	
T1	s	1, 2	5	
T2	s	1, 2	[1]	

4.6.5.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2, respectively. During T1 only the serving NR PCell is powered on, but at the start of T2 the virtual UE is powered on and starts transmitting on SRS resources, in addition to the serving NR cell which is kept powered on. The purpose of the test is to evaluate the event i1 reporting delay upon a newly powered up virtual UE, from the start of T2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 4.6.5.1.4.1-3, Table 4.6.5.1.5-1 and Table 4.6.5.1.5-2.

3. The SS shall transmit an *RRCReconfiguration* message, embedded in an *RRCConnectionReconfiguration* message, configuring a CLI measurement object with a CLI event I1 trigger, as specified in section 4.6.5.1.4.3.

4. The UE shall transmit *RRCReconfigurationComplete* message, embedded in an *RRCConnectionReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 4.6.5.1.4.1-3, Table 4.6.5.1.5-1 and Table 4.6.5.1.5-2. T2 Starts.

6. UE shall transmit a *MeasurementReport* message, embedded in an *ULInformationTransferMRDC* message, triggered by event I1, as specified in section 4.6.5.1.4.3. If the overall delay measured from the beginning of time period T2 is less than [62] ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall requirement delay, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

8. Repeat steps 1-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 4.6.5.1.4.3-1: Common Exception messages for EN-DC FR1 SRS-RSRP measurement with non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.4-1a Table H.3.4-2 Table H.3.4-3

Table 4.6.5.1.4.3-2: *MeasObjectToAddModList* for EN-DC FR1 SRS-RSRP measurement with non-DRX

Derivation Path: TS 38.508-1 [14], Table 4.6.3-77 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectToAddModList::= SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod {	1 entry		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectCLI-r16	MeasObjectCLI-r16		
}			
}			
}			

Table 4.6.5.1.4.3-3: *MeasObjectCLI-r16* for EN-DC FR1 SRS-RSRP measurement with non-DRX

Derivation Path: TS 38.508-1 [14], Table 4.6.3-76 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectCLI-r16 ::= SEQUENCE {			
cli-ResourceConfig-r16 SEQUENCE {			
srs-ResourceConfig-r16 CHOICE {			
setup SEQUENCE {			
SRS-ResourceListConfigCLI-r16 SEQUENCE {	1 entry		
srs-Resource-r16	SRSConf.1	entry 1	Config 1
	SRSConf.2	entry 1	Config 2
srs-SCS-r16	kHz15		Config 1
	kHz30		Config 2
refServCellIndex-r16	0	PCell	
refBWP-r16	0	BWP-0	

}			
}			
}			
}			
}			

Table 4.6.5.1.4.3-4: *ReportConfigNR* for EN-DC FR1 SRS-RSRP measurement with non-DRX

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
cli-EventTriggered-r16 SEQUENCE {			
eventId-r16 CHOICE {			
eventI1-r16 SEQUENCE {		Event I1	
i1-Threshold CHOICE {			
srs-RSRP-r16	43	43 = -97-(-140)	Config 1
srs-RSRP-r16	45	45 = -95-(-140)	Config 2
}			
reportOnLeave-r16	False		
hysteresis-16	0		
timeToTrigger-r16	ms0		
}			
}			
reportInterval-r16	ms120	Not critical to the test	
reportAmount-r16	r2	Similar to other measurement tests	
maxReportCLI-r16	1		
}			
}			
}			

Table 4.6.5.1.4.3-5: *MeasResultCLI-r16* for EN-DC FR1 SRS-RSRP measurement with non-DRX

Derivation Path: TS 38.508-1 [14], Table 4.6.3-79 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultCLI-r16 ::= SEQUENCE {			
measResultsListSRS-r16 CHOICE {			
srs-ResourceId-r16	SRS-ResourceId		
srs-RSRP-Result-r16	SRS-RSRP-Range-r16	INTEGER (0..98)	
}			
}			

4.6.5.1.5 Test requirement

Table 4.6.5.1.5-1 and Table 4.6.5.1-2 define the primary level settings including test tolerances for EN-DC FR1 SRS-RSRP measurement with non-DRX. Table 4.6.5.1.5-3 defines the SRS resource configurations.

Table 4.6.5.1.5-1: NR Cell specific test parameters for EN-DC FR1 SRS-RSRP measurement with non-DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.1.1	
		2	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 TDD	
		2	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 TDD	
		2	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 TDD	
		2	CCR.2.1 TDD	
OCNG Patterns		1, 2	OP.1	

Parameter	Unit	Test	Cell 2
TRS Configuration		1	TRS.1.1 TDD
		2	TRS.1.2 TDD
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1
Active DL BWP configuration		1, 2	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.1
N_{oc} Note 2	dBm/15 kHz	1	-98
		2	
N_{oc} Note 2	dBm/SCS	1	-98
		2	-95
Propagation Condition		1, 2	AWGN

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 4.6.5.1.5-2: Neighbor UE specific test parameters for EN-DC FR1 SRS-RSRP measurement with non-DRX

Parameter	Unit	Test configuration	Neighbour cell UE	
			T1	T2
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-95	
$\hat{E}_s/I_{ot}$	dB	1	-infinity	9.25
		2		8.75
$\hat{E}_s/N_{oc}$	dB	1	-infinity	9.25
		2		8.75
SRS-RSRP Note 3	dBm/SCS kHz	1	-infinity	-88.75
		2	-infinity	-86.25
Io	dBm/9.36 MHz	1	-70.05	-60.62
	dBm/38.16 MHz	2	-63.96	-57.51
Propagation Condition		1, 2	AWGN	

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 4.6.5.1.5-3: SRS configurations for EN-DC FR1 SRS-RSRP measurement with non-DRX

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	

	Field	SRSConf.1	SRSConf.2	Comments
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	12	12	
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset	sl20, 9	sl40, 19	
	sequenceId	0	0	Any 10 bit number

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than [60] ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.4.6.5.2 EN-DC FR1 CLI-RSSI measurement with non-DRX

4.6.5.2 EN-DC FR1 CLI-RSSI measurement in non-DRX

Editor's NOTE: This test case is incomplete in following aspects:

- Message contents are missing.
- Test Procedure might need update.
- Test applicability needs to be updated

4.6.5.2.1 Test purpose

To verify that the UE makes correct reporting of CLI-RSSI measurement in non-DRX within CLI-RSSI measurement requirements in TS 38.133 [6] clause 9.7.3.5.

4.6.5.2.2 Test applicability

FFS.

4.6.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.5.2.

4.6.5.2.4 Test description

4.6.5.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.5.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.5.2.4.1-2. Test environment parameters are given in Table 4.6.5.2.4.1-3.

Table 4.6.5.2.4.1-1: EN-DC FR1 CLI-RSSI measurement in non-DRX test configurations

Configuration	Description
1	NR 15 kHz SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table 4.6.5.2.4.1-2: General test parameters for CLI-RSSI event triggered reporting for PSCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1, 2	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.2 FR1	
SMTC configuration		1	SMTC.1	
		2	SMTC.1	
CLI-RSSI configuration		1	CLI-RSSIConf.1	Table 4.6.5.2.5-2
		2	CLI-RSSIConf.2	
CP length		1, 2	Normal	
i1-Threshold	dBm	1	-93	
		2	-93	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	Non-DRX
Time offset between DL from serving cell and OCNG from test system	μs	1,2	17.67	
T1	s	1, 2	5	
T2	s	1, 2	1	

Table 4.6.5.2.4.1-3: Test Environment parameters for EN-DC SSB based L1-RSRP measurement in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.5.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 4.6.5.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for CLI-RSSI measurements. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used.

4.6.5.2.4.2 Test procedure

FFS

4.6.5.2.4.3 Message contents

FFS

4.6.5.2.5 Test requirement

Table 4.6.5.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.5.2.5-1: NR Cell specific test parameters for CLI-RSSI event triggered reporting for PSCell in FR1

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.1.1	
		2	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 TDD	
		2	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 TDD	
		2	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 TDD	
		2	CCR.2.1 TDD	
OCNG Patterns Note 3		1, 2	OP.1	
TRS Configuration		1	TRS.1.1 TDD	
		2	TRS.1.2 TDD	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1	
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/15 kHz	1	-116	-108
		2		
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/SCS	1	-116	-108
		2	-113	-105
Io on CLI-RSSI measurement resource	dBm/9.36 MHz	1	-88.05	79.55
	dBm/38.16 MHz	2	-81.96	73.5
Io on CLI-RSSI measurement resource	dBm/1.08 MHz	1	-97.43	88.93
	dBm/1.08 MHz	2	-97.44	88.94
Propagation Condition		1, 2	AWGN	

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: OCNG is not transmitted in the CLI-RSSI measurement resources.

Table 4.6.5.2.5-2: CLI-RSSI measurement resource configuration for measurement reporting

	Field	CLI-RSSIConf.1	CLI-RSSIConf.2
RSSI-Resource	rssi-ResourceId	0	0
	rssi-SCS	15	30
	startPRB	0	0
	nrofPRBs	52	106
	startPosition	3	3
	nrofSymbols	11	11
	rssi-PeriodicityAndOffset	sl20, 9	sl40, 19

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 20 ms from the beginning of time period T2. The nominal RSSI used to evaluate the requirement shall be based on Io.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.6 Measurements with autonomous gaps

4.6.6.0 Minimum conformance requirements

4.6.6.0.1 Minimum conformance requirements for measurements with autonomous gaps

[TS 36.133, Clause 8.1.2.4.27 and Clause 8.1.2.4.28]

4.6.6.0.1.1 Minimum conformance requirements for E-UTRA FDD - NR measurements with autonomous gaps

4.6.6.0.1.1.1 Introduction

The requirements in this clause are specified for CGI identification of an NR target cell and are applicable for a UE:

- in RRC_CONNECTED state, and
- configured with LTE-FDD standalone

The overall CGI reporting delay is defined in Clause 4.6.6.0.1.1.3.

4.6.6.0.1.1.2 CGI identification of an NR cell with autonomous gaps

The UE shall identify and report the CGI of a known NR target cell when requested by the network for the purpose of 'reportCGI'. Only one cell is provided to the UE with *cellForWhichToReportCGI* for identifying the CGI. The UE may make autonomous gaps in both downlink reception and uplink transmission of both E-UTRA and NR serving cell(s) for receiving MIB and SIB1 message according to clause 5.5.3 in TS 38.331 [13]. Note that E-UTRAN does not configure si-RequestForHO if *reportConfig* is linked to a *measObject* set to *measObjectNR*. The UE shall be able to identify a new CGI of a known NR cell within:

$$T_{identify_CGI_NR} = (T_{MIB_NR} + T_{SIB1_NR}) \text{ ms}$$

Where:

T_{MIB_NR} is the maximum time to acquire MIB message. $T_{MIB_NR} = 6 * T_{SMTC}$ ms for NR cells on FR1 or $25 * T_{SMTC}$ ms, for NR cells on FR2.

T_{SIB1_NR} is the maximum time period to acquire SIB1 message. $T_{SIB1_NR} = 6 * T_{RMSI\text{-}scheduling}$ ms, where $T_{RMSI\text{-}scheduling}$ is the periodicity with which the SIB1 is actually transmitted by the NR target cell.

The requirement for identifying the CGI of an NR cell within $T_{identify_CGI_NR}$ is applicable when no DRX is used as well as when any of the DRX or eDRX_CONN cycles specified in TS 36.331 [29] is used.

Within the time $T_{identify_CGI_NR}$, over which the UE identifies the CGI of an NR cell, the UE shall fulfil interruption requirements specified in Clause 7.37 in TS 36.133.

In the requirement a cell is known if,

- During the last 5 seconds for FR1 or 3 seconds for FR2 before the reception of the report CGI command:
  - The UE has sent a valid L3-RSRP measurement report with SSB index for the NR target cell and
- During MIB decoding at least reported SSBs remains detectable according to the SSB Es/Iot conditions specified in clause 9.2 or 9.3 in TS 38.133 [6], and
- During SIB1 decoding the SSB used for MIB decoding remains detectable according to the SSB Es/Iot conditions specified in clause 9.2 or 9.3 in TS 38.133 [6], and
- During MIB decoding, the SSB for MIB decoding remains detectable with SNR $\geq$ -3dB

- During SIB1 decoding, the PDSCH for SIB1 decoding remains detectable with SNR ≥ -3dB

4.6.6.0.1.1.3 CGI reporting delay

The CGI reporting delay is defined as the time between a command that will trigger a CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI_NR}$ defined in clause 4.6.6.0.1.1.2 plus RRC procedure delay defined in Clause 11 in TS 36.331 [29], an additional 30ms margin, and additional 20ms margin if NR target cell is on FR2.

4.6.6.0.1.2 Minimum conformance requirements for E-UTRA TDD - NR measurements with autonomous gaps

4.6.6.0.1.2.1 Introduction

The requirements in this clause are specified for CGI identification of an NR target cell and are applicable for a UE:

- in RRC_CONNECTED state, and
- configured with LTE-TDD standalone

The overall CGI reporting delay is defined in Clause 4.6.6.0.1.2.3.

4.6.6.0.1.2.2 CGI identification of an NR cell with autonomous gaps

The requirements in clause 4.6.6.0.1.1.2 shall apply.

4.6.6.0.1.2.3 CGI reporting delay

The requirements in clause 4.6.6.0.1.1.3 shall apply.

4.6.6.1 EN-DC intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing

4.6.6.1.1 Test purpose

The purpose of this test is to verify the requirements for intra-frequency identification of a new CGI of NR FR1 cell with autonomous gaps in clause 8.1.2.4.27 and 8.1.2.4.28 in 36.133 [23] for EN-DC.

4.6.6.1.2 Test applicability

This test applies to all types of EN-DC UE Rel-16 and forward supporting EN-DC with PSCell in FR1 and supporting acquisition of CGI from neighbor NR cell using autonomous gap, which is controlled by PICS pc_nr_CGI_Reporting.

4.6.6.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.6.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.6.1.

4.6.6.1.4 Test description

The test scenario comprises of one E-UTRA carrier and one NR FR1 carrier. Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1) on E-UTRA RF channel 1, NR FR1 PSCell (Cell 2) and NR FR1 neighbour cell (Cell 3) on NR RF channel 1.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 3. Starting T2, Cell 3 becomes detectable and the UE is expected to detect and send a measurement report.

4.6.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.6.1.4.1-1.

Table 4.6.6.1.4.1-1: Intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DN

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Configure the test equipment and the DUT according to the parameters in Table 4.6.6.1.4.1-2.

Table 4.6.6.1.4.1-2: Initial conditions for EN-DC PSCell FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.6.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.2.3.1	
Exceptions to connection diagram	N/A		

1. The test parameters for NR Cells are given in Table 4.6.6.1.4.1-3 below. The test parameters and applicability for the E-UTRAN PCell are defined in Table A.3.7.2.1-1 in TS 38.133 [6]. Cell-specific parameters of NR PSCell are specified in Table 4.6.6.1.5-1.

2. Message contents are defined in clause 4.6.6.1.4.3.

3. There are one E-UTRAN cell and two NR cells specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 4.6.6.1.4.1-3: General test parameters for intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN radio channel is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1	One NR FR1 radio channel is used.

Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR Cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR Cell 3	NR Cell 3 is on NR RF channel number 1.
A3-Offset	dB	Config 1,2,3,4,5,6	-4.5	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μs	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	≤10	
T3	s	Config 1,2,3,4,5,6	5	

4.6.6.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4. UE is connected to Cell 1 (PCell) on E-UTRAN RF channel 1 (PCC) and to Cell 2 (PSCell) on NR RF channel 1 (PSCC). NR Cell 3 is on NR RF channel 1. Set the parameters according to Tables 4.6.6.1.4.1-3 and 4.6.6.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

2. The SS starts sending PDCCHs indicating new transmissions continuously on Cell 2.

3. T1 starts. At this moment, the UE does not have any timing information of Cell 3.

4. After 5 seconds, T2 starts. A RRC message implying SI reading shall be sent to the UE during period T2, after the UE has reported Event A3. The RRC message shall create a measurement report configuration with purpose *reportCGI* which *cellForWhichToReportCGI* set to the physical cell identity of Cell 3.

5. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading of the neighbour cell (Cell 3) using autonomous gap is sent to the UE.

6. If the UE transmits a measurement report containing the cell global identifier of Cell 3 within 260 ms from the start of T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. If it is successful, continue to step 9. Otherwise continue to step 8.

8. Switch the UE OFF and then ON. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.6.1.4.3 Message contents

TBD

4.6.6.1.5 Test requirement

Table 4.6.6.1.5-1 defines the cell specific test parameters.

Table 4.6.6.1.5-1: Cell specific test parameters for intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC

Parameter	Unit	Test configuration	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
Duplex mode		Config 1,4	FDD					
		Config 2,3,5,6	TDD					
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52					
		Config 2,5	10: $N_{RB,c}$ = 52					
		Config 3,6	40: $N_{RB,c}$ = 106					
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52					
		Config 2,5	10: $N_{RB,c}$ = 52					
		Config 3,6	40: $N_{RB,c}$ = 106					
TDD configuration		Config 1,4	N/A			N/A		
		Config 2,5	TDDConf.1.1			TDDConf.1.1		
		Config 3,6	TDDConf.2.1			TDDConf.2.1		
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1			NA		
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1			NA		
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1			NA		
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1			NA		
TRS configuration		Config 1,4	TRS.1.1 FDD			NA		
		Config 2,5	TRS.1.1 TDD					
		Config 3,6	TRS.1.2 TDD					
OCNG Patterns defined in A.3.2.1.1 (OP.1) in TS 38.133 [6]		Config 1,2,3,4,5,6	OP.1			OP.1		
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD			NA		
		Config 2,5	SR.1.1 TDD					
		Config 3,6	SR2.1 TDD					
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD			NA		
		Config 2,5	CR.1.1 TDD			NA		
		Config 3,6	CR2.1 TDD			NA		
RMC CORESET Reference Channel		1, 4	CCR.1.1 FDD			NA		
		2, 5	CCR.1.1 TDD			NA		
		3, 6	CCR.2.1 TDD			NA		
SSB parameters		Config 1,2,4,5	SSB.1 FR1					
		Config 3,6	SSB.2 FR1					
SMTC configuration defined in A.3.11 in TS 38.133 [6]		Config 1,4	SMTC.2					
		Config 2,3,5,6	SMTC.1					
RMSI scheduling periodicity	ms	Config 1,2,3,4,5,6	20ms					
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15					
		Config 3,6	30					
RLM-RS		Config 1,2,3,4,5,6	SSB			SSB		
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0			0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								

EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15 kHz		-98			-98		
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98			-98		
		Config 3,6	-95			-95		
SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-94	-Infinity	-94	-94
		Config 3,6	-91	-91	-91	-Infinity	-91	-91
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	-1.46	-1.46	-Infinity	-1.46	-1.46
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	4	-Infinity	4	4
Io Note3	dBm/9.36MHz	Config 1,2,4,5	-64.60	-62.25	-62.25	-64.60	-62.25	-62.25
	dBm/38.16MHz	Config 3,6	-58.50	-56.16	-56.16	-58.50	-56.16	-56.16
Propagation Condition		Config 1,2,3,4,5,6	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall transmit a measurement report containing the cell global identifier of Cell 3 within 257 ms from the start of T3.

Test requirement = RRC Procedure delay + $T_{identify_CGI_NR}$ + reporting delay

= 15 + 240 + 2

= 257 ms, allow 260 ms.

The UE shall be scheduled continuously throughout the test, and from the start of T3 until 257 ms the number of interrupted slots shall not exceed the allowed number specified in TS 38.133 Clause 8.2.1.2.16 [6].

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.7 L1-SINR measurement for beam reporting

4.6.7.0 Minimum conformance requirements

4.6.7.0.1 L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured

The UE shall be capable of performing L1-SINR measurements with the CSI-RS resource configured as CMR and no dedicated resource configured as IMR for L1-SINR computation, and the UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ is defined in Table 4.6.7.0.1-1 for FR1, where

For the value of M,

- For periodic and semi-persistent CSI-RS resources as CMR, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise;

- For aperiodic CSI-RS resources as CMR, M=1.

For the value of P in FR1,

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

Where:

$T_{SMTCperiod}$ = the configured SMTC1 period or SMTC2 period if configured.

T_{CSI-RS} = the periodicity of CSI-RS configured for L1-SINR measurement

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Note: The overlap between CSI-RS for L1-SINR measurement and SMTC means that CSI-RS for L1-SINR measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 4.6.7.0.1-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI-RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{CSI-RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: T_{CSI-RS} is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	

The UE shall send L1-SINR reports only for report configurations configured for the active BWP.

The UE shall report the L1-SINR value as a 7-bit value in the range [-23, 40] dB with 0.5dB step size if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-SINR based reporting. The differential L1-SINR is quantized to a 4-bit value with 1dB step size. The mapping between the reported L1-SINR value and the measured quantity is described in 10.1.16.

Reported L1-SINR measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-SINR reports shall meet the requirements in clauses 10.1.27 for FR1 and 10.1.28 for FR2, respectively.

The UE shall only send aperiodic L1-SINR measurement reports, if a DCI for triggering report has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-SINR reporting on PUSCH over the air interface at the time specified according to clause 5.2.1.4 in TS 38.214 [26].

The UE is required to be capable of measuring L1-SINR without measurement gaps. The UE is required to perform the SSB and CSI-RS/CSI-IM measurements with measurement restrictions as described in the following clauses.

For both FR1 and FR2, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to receive CSI-RS for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement is within the active BWP and has same SCS than CSI-RS configured for L1-SINR measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement is within the active BWP and has different SCS than CSI-RS configured for L1-SINR measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to perform CSI-RS measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and SSB. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE shall be able to measure the CSI-RS for L1-SINR measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clause 9.8.3, 9.8.4.1 and 9.8.5.2.

4.6.7.0.2 L1-SINR reporting with SSB based CMR and dedicated IMR configured

The UE shall be capable of performing L1-SINR measurements with the SSB configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to SSB configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as SSB configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ is defined in Table 4.6.7.0.2-1for FR1, where

For the value of M

- For periodic or semi-persistent NZP CSI-RS or CSI-IM resource as dedicated IMR, M=1 if the higher layer parameters *timeRestrictionForChannelMeasurements* and/or *timeRestrictionForInterferenceMeasurements* are configured, and M=3 otherwise;

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- the value of P_{CMR} shall be derived in the same way as the value of P used for SSB based L1-RSRP measurement in clause 9.5.4.1, in which the occasions and period of the SSB for CMR shall be used instead.

- the value of P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2, in which the occasions and period of the NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with SSB as CMR and CSI-RS or CSI-IM as IMR, the requirement shall apply if the CSI-RS is configured as IMR with repetition field as “repetition = OFF” or CSI-IM is configured as IMR.

For L1-SINR measurement with SSB as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if SSB occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap.

Table 4.6.7.0.2-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-SINR channel measurement. T_{DRX} is the DRX cycle	

	length. T_{Report} is configured periodicity for reporting.
Note 2:	The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.

The UE shall send L1-SINR reports only for report configurations configured for the active BWP.

The UE shall report the L1-SINR value as a 7-bit value in the range [-23, 40] dB with 0.5dB step size if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-SINR based reporting. The differential L1-SINR is quantized to a 4-bit value with 1dB step size. The mapping between the reported L1-SINR value and the measured quantity is described in 10.1.16.

The UE shall transmit the periodic L1-SINR reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

Reported L1-SINR measurements contained in periodic L1-SINR measurement reports shall meet the requirements in clauses 10.1.27 for FR1 and 10.1.28 for FR2, respectively.

For FR1, when the SSB configured as CMR for L1-SINR measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-SINR measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for L1-SINR measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for L1-SINR measurement and CSI-RS. Longer measurement period for SSB based L1-SINR measurement is expected, and no requirements are defined.

For both FR1 and FR2, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to receive CSI-RS for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement is within the active BWP and has same SCS than CSI-RS configured for L1-SINR measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement is within the active BWP and has different SCS than CSI-RS configured for L1-SINR measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and SSB. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE shall be able to measure the CSI-RS for L1-SINR measurement without any restriction.

For both FR1 and FR2, when the CSI-IM configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to measure CSI-IM for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR1, UE shall be able to measure the CSI-IM configured for L1-SINR measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clause 9.8.3, 9.8.4.2 and 9.8.5.

4.6.7.0.3 L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured

The UE shall be capable of performing L1-SINR measurements with the CSI-RS resource configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to CSI-RS resource configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as CSI-RS resource configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ is defined in Table 4.6.7.0.3-1 for FR1, where

For the value of M,

- M=1 shall be applied if
  - aperiodic NZP-CSI-RS as CMR or dedicated IMR, or
  - aperiodic CSI-IMR as dedicated IMR, or
  - periodic and semi-persistent NZP-CSI-RS as CMR or dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured, or
  - periodic and semi-persistent CSI-IM as dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured;
- M=3 otherwise.

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- The value of P_{CMR} and P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2, in which the occasions and period of the CSI-RS for CMR and NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead respectively.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS as IMR, the requirement shall apply only if CSI-RS resources as CMR and IMR are configured with the same repetition field and the number of CSI-RS resources in the resource sets for CMR and IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-IM as IMR, the requirement shall apply only if the number of CSI-RS resources in the resource set for CMR and the number of CSI-IM resources in the resource set for IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if CSI-RS occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap.

Table 4.6.7.0.3-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3. Note 3: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to CSI-RS configured for channel measurement, with the same periodicity.	

The UE shall send L1-SINR reports only for report configurations configured for the active BWP.

The UE shall report the L1-SINR value as a 7-bit value in the range [-23, 40] dB with 0.5dB step size if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-SINR based reporting. The differential L1-SINR is quantized to a 4-bit value with 1dB step size. The mapping between the reported L1-SINR value and the measured quantity is described in 10.1.16.

Reported L1-SINR measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-SINR reports shall meet the requirements in clauses 10.1.27 for FR1 and 10.1.28 for FR2, respectively.

The UE shall only send aperiodic L1-SINR measurement reports, if a DCI for triggering report has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-SINR reporting on PUSCH over the air interface at the time specified according to clause 5.2.1.4 in TS 38.214 [26].

For both FR1 and FR2, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to receive CSI-RS for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement is within the active BWP and has same SCS than CSI-RS configured for L1-SINR measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement is within the active BWP and has different SCS than CSI-RS configured for L1-SINR measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and SSB. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE shall be able to measure the CSI-RS for L1-SINR measurement without any restriction.

For both FR1 and FR2, when the CSI-IM configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to measure CSI-IM for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR1, UE shall be able to measure the CSI-IM configured for L1-SINR measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clause 9.8.3, 9.8.4.3 and 9.8.5.

4.6.7.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in non-DRX

4.6.7.1.1 Test purpose

To verify that the UE makes correct reporting of L1-SINR measurement based on CSI-RS CMR without dedicated IMR in non-DRX within L1-SINR measurement requirements in TS 38.133 [6] clause 9.8.4.1.

4.6.7.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC and L1-SINR measurement.

4.6.7.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.7.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.7.1.

4.6.7.1.4 Test description

4.6.7.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.7.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.7.1.4.1-2. Test environment parameters are given in Table 4.6.7.1.4.1-3.

Table 4.6.7.1.4.1-1: EN-DC CSI-RS based CMR without dedicated IMR L1-SINR measurement supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 4.6.7.1.4.1-2: General test parameters for EN-DC CSI-RS based CMR without dedicated IMR L1-SINR measurement

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration	1,4		CSI-RS.1.3 FDD
	2,5		CSI-RS.1.3 TDD
	3,6		CSI-RS.2.3 TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
DRX configuration	1~6		Off
reportConfigType	1~6		aperiodic

reportQuantity-r16	1~6		cri-SINR-r16
Number of reported RS	1~6		2
qcl-Info	1~6		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	26
T1	1~6	s	5
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 4.6.7.1.4.1-3: Test Environment parameters for EN-DC CSI-RS based CMR without dedicated IMR L1-SINR measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.7.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.5 for TE Part		

1. Message contents are defined in clause 4.6.7.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for CSI-RS based L1-SINR measurements. Before the test, UE is configured to perform RLM and BFD measurement based on the SSBs.

4.6.7.1.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. UE is also configured to measure L1-SINR based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in Table 4.6.7.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 4.6.7.1.5-1. T1 starts.

3. After 80ms from the start of the test the SS transmits the DCI trigger in slot 1 for configuration 1,2,4,5 and slot 8 for configuration 3, 6. The corresponding CSI-RS set is transmitted with the offset of 4 slots after the DCI trigger.

4. The UE shall send L1-SINR report at slot 26 from the reception of DCI trigger. The report shall contain L1-SINR of both CSI-RS#0 and CSI-RS#1.

5. The SS shall check following requirements:

   R1: the UE shall send L1-SINR report at slot 26 from the reception of DCI trigger. If the report is received at slot 26 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   R2: The L1-SINR value of CSI-RS#1 reported by the UE is compared to the expected L1-SINR value for CSI-RS #1. If the resulting value is outside the limits in Table 4.6.7.1.5-2 for all test configurations or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

R3: The DIFF SINR value of CSI-RS#0 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 4.6.7.1.5-4 for all test configurations or the UE fails to report the measurement value for CSI-RS #0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

6. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

7. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

8. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.7.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.7.1.4.3-1: Common Exception messages EN-DC CSI-RS based CMR without dedicated IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions APERIODIC and CSI-SINR Table H.3.6A-2 with conditions CSI-RS and APERIODIC

Table 4.6.7.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

4.6.7.1.5 Test requirement

Table 4.6.7.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.7.1.5-1: CSI-RS specific test parameters for EN-DC CSI-RS based CMR without dedicated IMR L1-SINR measurement

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~6	dBm/15kHz	-94.65	
N_{oc} Note1	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s / I_{ot}$	1~6	dB	0	3
CSI-RS RSRP Note3	1,2,4,5	dBm/SSB SCS	-94.65	-91.65
	3,6		-91.65	-88.65
Io Note2	1,2,4,5	dBm/9.36 MHz	-63.69	-61.93
	3,6	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	3

Note 1: xxx?
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

After 80ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1.

Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 4.6.7.1.5-2 for all test configurations and the corresponding relative accuracy requirements in Table 4.6.7.1.5-4 for all test configurations.

Table 4.6.7.1.5-2: L1-SINR absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	41
Highest reported value (CSI-RS#1)	64

Table 4.6.7.1.5-3:Void

Table 4.6.7.1.5-4: L1-SINR relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1
Lowest DIFF SINR reported (CSI-RS#0)	0
Highest DIFF SINR reported (CSI-RS#0)	7

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others..

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.7.2 EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR measurement in DRX

4.6.7.2.1 Test purpose

To verify that the UE makes correct reporting of SSB-based CMR and CSI-IM based IMR L1-SINR measurement in DRX within L1-SINR measurement requirements based in TS 38.133 [6] clause 9.8.4.2.

4.6.7.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR1 and long DRX cycle and L1-SINR measurement.

4.6.7.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.7.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.7.2.

4.6.7.2.4 Test description

4.6.7.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.7.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.7.2.4.1-2. Test environment parameters are given in Table 4.6.7.2.4.1-3.

Table 4.6.7.2.4.1-1: EN-DC SSB based CMR and CSI-IM based IMR L1-SINR measurement in DRX supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 4.6.7.2.4.1-2: General test parameters for EN-DC SSB based CMR and CSI-IM based IMR L1-SINR measurement in DRX

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference	1,4		CR.1.1 FDD

Channel	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-IM configuration	1,4		CSI-IM.1.1 FDD
	2,5		CSI-IM.1.1 TDD
	3,6		CSI-IM.2.1 TDD
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		DRX.3
reportConfigType	1~6		periodic
reportQuantity-r16	1~6		ssb-Index-SINR-r16
Number of reported RS	1~6		2
L1-SINR reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 4.6.7.2.4.1-3: Test Environment parameters for EN-DC SSB based CMR and CSI-IM based IMR L1-SINR measurement in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.7.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4TBD	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.5 for TE Part		

1. Message contents are defined in clause 4.6.7.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for SSB based CMR and CSI-IM based IMR L1-SINR measurements. Before the test, UE is configured to perform RLM and BFD based on the SSBs. DRX is configured as specified in Table 4.6.7.2.4.1-2.

4.6.7.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above Table 4.6.7.2.4.1-2. Before the test, UE is configured to perform RLM, BFD and L1-SINR measurement based on the SSBs.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 4.6.7.2.4.1-2.

2. Set the parameters according to T1 in Table 4.6.7.2.5-1. T1 starts.

5. The UE shall be transmitting CSI on PUCCH with a periodicity of 80 slots.

6. When T1 expires, the SS shall set the parameters according to T2 in 4.6.7.2.5-1. T2 starts.

7. The UE shall start sending L1-SINR reports. The SS shall check following requirements:

   R1: the UE shall start to transmit valid reports no later than 720 ms for configuration 1, 2, 4 and 5 and no later than 680 ms for configuration 3 and 6 from the beginning of time period T2. A valid report shall meet the absolute L1-SINR requirement for SSB#1 in Table 4.6.7.2.5-2 for all test configurations and the relative L1-SINR requirement for SSB#0 in Table 4.6.7.2.5-4 for all test configurations. If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   R3: The L1-SINR value of SSB#1 reported by the UE is compared to the expected L1-SINR value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 4.6.7.2.5-2 for all test configurations or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

R4: The DIFF SINR value of SSB#0 reported by the UE is compared to the expected DIFF SINR value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 4.6.7.2.5-2 for all test configurations or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one..

8. The SS waits until T2 expires.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

10. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

11. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

12. Repeat steps 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.7.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.7.2.4.3-1: Common Exception messages EN-DC SSB based CMR and CSI-IM based IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and SS-SINR and CSI-IM_IMR Table H.3.6A-2 with conditions SSB and PERIODIC Table H.3.6A-4 with condition PERIODIC Table H.3.7-1 with condition DRX.3

Table 4.6.7.2.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

4.6.7.2.5 Test requirement

Table 4.6.7.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.7.2.5-1: SSB specific test parameters for EN-DC SSB based CMR and CSI-IM based IMR L1-SINR measurement in DRX

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~6	dBm/15kHz	-94.65+TT			
N_{oc} Note2	1,2,4,5	dBm/SSB SCS	-94.65+TT			
	3,6		-91.65+TT			
$\hat{E}_s/I_{ot}$	1~6	dB	0+TT	0+TT	0+TT	0+TT
SS-RSRP Note3	1,2,4,5	dBm/SSB SCS	-94.65+TT	-94.65+TT	-94.65+TT	-94.65+TT
	3,6		-91.65+TT	-91.65+TT	-91.65+TT	-91.65+TT
Io Note3	1,2,4,5	dBm/9.36 MHz	-63.69+TT	-63.69+TT	-63.69+TT	-63.69+TT
	3,6	dBm/38.16 MHz	-57.59+TT	-57.59+TT	-57.59+TT	-57.59+TT

$\hat{E}_s / N_{oc}$	1~6	dB	0+TT	0+TT	0+TT	0+TT

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send L1-SINR report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-SINR report including results of both SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1. Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 4.6.7.2.5-2 for all test configurations and the corresponding relative accuracy requirements in Table 4.6.7.2.5-4 for all test configurations.

Table 4.6.7.2.5-2: L1-SINR absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	TBD43
Highest reported value (SSB#1)	-	TBD62

Table 4.6.7.2.5-3: Void

Table 4.6.7.2.5-4: L1-SINR relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF SINR reported (SSB#0)	-	TBD0
Highest DIFF SINR reported (SSB#0)	-	TBD6

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others..

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.7.3 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX

4.6.7.3.1 Test purpose

To verify that the UE makes correct reporting of CSI-RS-based CMR and dedicated IMR L1-SINR measurement in DRX within L1-SINR measurement requirements in TS 38.133 [6] clause 9.8.4.3.

4.6.7.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR1 and L1-SINR measurement and long DRX cycle.

4.6.7.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.7.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.4.6.7.3.

4.6.7.3.4 Test description

4.6.7.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.6.7.3.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.6.7.3.4.1-2. Test environment parameters are given in Table 4.6.7.3.4.1-3.

Table 4.6.7.3.4.1-1: EN-DC CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 4.6.7.3.4.1-2: General test parameters for EN-DC CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration as CMR	1,4		CSI-RS.1.3 FDD
	2,5		CSI-RS.1.3 TDD
	3,6		CSI-RS.2.3 TDD
CSI-RS configuration as IMR	1,4		CSI-RS.1.2A FDD
	2,5		CSI-RS.1.2A TDD
	3,6		CSI-RS.2.2A TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
DRX configuration	1~6		DRX.3
reportConfigType	1~6		aperiodic

reportQuantity-r16	1~6		cri-SINR-r16
Number of reported RS	1~6		2
qcl-Info	1~6		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	26
T1	1~6	s	5
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 4.6.7.3.4.1-3: Test Environment parameters for EN-DC CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.7.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.5 for TE Part		

1. Message contents are defined in clause 4.6.7.3.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for CSI-RS based CMR and dedicated IMR L1-SINR measurements. Before the test, UE is configured to perform RLM and BFD measurement based on the SSBs. DRX is configured as specified in Table 4.6.7.3.4.1-2.

4.6.7.3.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. UE is also configured to measure L1-SINR based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in table 4.6.7.3.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 4.6.7.3.5-1. T1 starts.

3. After 80ms from the start of the test the SS transmits the DCI trigger in slot 1 for configuration 1,2,4,5 and slot 8 for configuration 3, 6. The corresponding CSI-RS as CMR and the associated CSI-RS as IMR are transmitted with the offset of 4 slots and 6 slots after the DCI trigger, respectively.

4. The UE shall send L1-SINR report at slot 26 from the reception of DCI trigger. The report shall contain L1-SINR of both CSI-RS#0 and CSI-RS#1.

5. The SS shall check following requirements:

   R1: the UE shall send L1-SINR report at slot 26 from the reception of DCI trigger. If the report is received at slot 26 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   R2: The L1-SINR value of CSI-RS#1 reported by the UE is compared to the expected L1-SINR value for CSI-RS #1. If the resulting value is outside the limits in Table 4.6.7.3.5-2 for all test configurations or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   R3: The DIFF SINR value of CSI-RS#0 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 4.6.7.3.5-4 for all test configurations or the UE fails to report the measurement value for CSI-RS #0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

6. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

7. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

8. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.6.7.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.6.7.3.4.3-1: Common Exception messages EN-DC CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions APERIODIC and CSI-SINR and CSI-RS_IMR Table H.3.6A-2 with conditions CSI-RS and APERIODIC Table H.3.6A-3 with conditions APERIODIC Table H.3.7-1 with condition DRX.3

4.6.7.3.5 Test requirement

Table 4.6.7.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.6.7.3.5-1: CSI-RS specific test parameters for EN-DC CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~6	dBm/15kHz	-94.65	

N_{oc} Note1	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s / I_{ot}$	1~6	dB	0.5	3
$\hat{E}_s / N_{oc}$	1~6	dB	0.5	3
CSI-RS RSRP Note2	1,2,4,5	dBm/SSB SCS	-94.15	-91.65
	3,6		-91.14	-88.65
Io Note2	1,2,4,5	dBm/9.36 MHz	-63.43	-61.93
	3,6	dBm/38.16 MHz	-57.33	-55.84
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-RS#0 as IMR and CSI-RS#1 as CMR + CSI-RS#1 as IMR.

Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 4.6.7.3.5-2 for all configurations and the corresponding relative accuracy requirements in Table 4.6.7.3.5-4 for all test configurations.

Table 4.6.7.3.5-2: L1-SINR absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	44
Highest reported value (CSI-RS#1)	61

Table 4.6.7.3.5-3: Void

Table 4.6.7.3.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1
Lowest DIFF RSRP reported (CSI-RS#0)	0
Highest DIFF RSRP reported (CSI-RS#0)	5

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others..

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

4.6.8 CSI-RS based intra-frequency measurement

4.6.8.0 Minimum conformance requirements

4.6.8.0.1 Minimum conformance requirements for EN-DC event triggered reporting tests without gap under DRX

[TS38.133, Clause 9.10.2]

For each intra-frequency CSI-RS layer, during each layer 1 measurement period, the UE shall be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least:

- 32 CSI-RSs with different CSI-RS index and/or PCI on the intra-frequency layer, and
- the cells to be monitored based on CSI-RS are the same set or a subset of the cells monitored based on the layer of the associated SSB

Reported CSI-RSRP, CSI-RSRQ, and CSI- SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.2.3, 10.1.3.3, 10.1.7.2, 10.1.8.2, 10.1.12.2 and 10.1.13.2 in TS 38.133 [6].

The UE shall not send any event triggered measurement reports as long as no reporting criterion is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than the CSI-RS based measurement defined below. When L3 filtering is used an additional delay can be expected.

If a UE is configured with the higher layer parameters *CSI-RS-Resource-Mobility* and *associatedSSB*, the CSI-RS based measurement shall include PSS/SSS detection time of *associatedSSB*, the time period used to acquire the SFN information and CSI-RS based measurement period without gap.

- PSS/SSS detection time of *associatedSSB* is the intra-frequency T_{PSS/SSS_sync_intra} in Clause 9.2.5.1 in TS 38.133 [6].
- The time period used to acquire the SFN information is equal to 0 if the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise, the time period used to acquire the SFN information is $T_{CSI\text{-}RS_SFN_intra}$ as shown in Table 4.6.8.0.1-2 for FR1. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.
- If the *associatedSSB*, which has been detectable at least for the time period $T_{identify_intra_with_index}$ defined in clause 9.2.5.1 in TS 38.133 [6], becomes undetectable for a period $\leq$ 5 seconds and then the *associatedSSB* becomes detectable again with the same spatial reception parameter provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [7], PSS/SSS detection time and time period used to acquire the SFN information are equal to 0.

The measurement period for CSI- RS based intra-frequency measurements without gaps is as shown in table 4.6.8.0.1-1.

Additionally, for a given CSI-RS resource, if the associated SS/PBCH block is configured but not detected by the UE, or if CSI-RS is configured with associated SSB but not QCL-ed to the associated SSB, the UE is not required to monitor the corresponding CSI-RS resource.

Table 4.6.8.0.1-1: Measurement period for intra-frequency CSI-RS based measurements without gaps (FR1)

DRX cycle	$T_{CSI\text{-}RS_measurement_period_intra}$
No DRX	max(200ms, ceil(5 x $K_{p_CSI\text{-}RS}$) x CSI-RS period) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x $K_{p_CSI\text{-}RS}$) x max(CSI-RS period, DRX cycle)) x $CSSF_{intra}$

DRX cycle>320ms	ceil(5 x K_{p_CSI-RS}) x DRX cycle x $CSSF_{intra}$
NOTE 1: The requirements apply assuming CSI-RS configuration with {D=3 with PRBs ≥ 48}. D is frequency domain density for the 1-port CSI-RS for L3 mobility defined in clause 7.4.1 of TS38.211 [7].	

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1.5 in TS 38.133 [6].

For a UE not supporting *concurrentMeasGap-r17* or for a UE is supporting *concurrentMeasGap-r17* but not configured with concurrent measurement gaps, and the UE does not support [*musim-GapPreference-r17]* or is supporting [*musim-GapPreference-r17]* but not configured with periodic MUSIM gaps,

- if the intra-frequency CSI-RS resource does not overlap with any measurement gaps, K_{p_CSI-RS}=1;
- if some occasions of the intra-frequency CSI-RS resource is overlapped with any measurement gaps, K_{p_CSI-RS} = 1/(1- (CSI-RS resource period /MGRP)) , where CSI-RS resource period < MGRP, and the MGRP is the periodicity of the measurement gap.
- Otherwise, when UE supports concurrent measurement gaps or [*musim-GapPreference-r17]* or both concurrent measurement gaps and *[musim-GapPreference-r17],* and concurrent measurement gaps or periodic MUSIM gaps or both concurrent gaps and periodic MUSIM gaps are configured, K_{p_CSI-RS} is the scaling factor for a CSI-RS frequency layer to be measured outside gap which is defined as $K_{p_CSI-RS} = N_{total} / N_{available}$

  For a window W of duration max(CSI-RS period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE MG, periodic MUSIM gaps, and per-FR MG within the same FR as the CSI-RS frequency layer, and starting at the beginning of any gap occasions covering the CSI-RS resources:

  N_{total} is the total number of CSI-RS resource occasions within the window, including those overlapped with other MG and MUSIM gap occasions within the window, and

  $N_{available}$ is the number of CSI-RS resource occasions that are not overlapped with any other non-dropped MG or non-dropped MUSIM gap occasions within the window W, after accounting for MG and MUSIM gap collisions by applying the collision rules for the measurement gap and MUSIM gap in section 9.1.8.3, 9.1.10.4 and 9.1.10.5 in TS 38.133 [6], respectively.

  K_{p_CSI-RS} = 1 when $N_{available}$ = 0

  Requirements in this clause do not apply when $N_{available}$ = 0 due to fully overlapping between CSI-RS occasions and MUSIM gap occasions within the window W.

  Editor Note: FSS for the case when $N_{available}$ = 0 due to fully overlapping between CSI-RS occasions and the union of MUSIM gap and measurement gap occasions within the window W.

When UE supports [*MUSIM-GapConfig-17]* and the CSI-RS occasions of the target frequency layer is overlapping with the configured aperiodic MUSIM gap, longer cell identification period for the target frequency layer is expected.

Table 4.6.8.0.1-2: Time period for SFN acquisition for intra-frequency CSI-RS based measurements without gaps(FR1)

DRX cycle	$T_{CSI-RS_SFN_intra}$
No DRX	max(200ms, ceil(5 x K_{p_CSI-RS}) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(2000ms, ceil (1.5 x 5 x K_{p_CSI-RS}) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(5 x K_{p_CSI-RS}) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified.	
NOTE 2: K_{p_CSI-RS} is applicable for a UE supporting concurrent gaps and/or MUSIM gaps.	

4.6.9 CSI-RS based inter-frequency measurement

4.6.9.0 Minimum conformance requirements

4.6.9.0.1 Minimum conformance requirements for EN-DC event triggered reporting tests for FR1 cell when non-DRX is used

[TS38.133, Clause 9.10.3]

For each inter-frequency CSI-RS layer, during each layer 1 measurement period, the UE shall be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least:

- 14 CSI-RSs with different CSI-RS index and/or PCI, and
- The cells to be monitored based on CSI-RS are the same set or a subset of the cells monitored based on the layer of the associated SSB.

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4.2, 10.1.5.2, 10.1.9.2, 10.1.10.2, 10.1.14.2 and 10.1.15.2 in TS 38.133 [6].

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within CSI-RS based measurement defined below. When L3 filtering is used an additional delay can be expected.

When measurement gaps are provided, if configured with the higher layer parameters *CSI-RS-Resource-Mobility* and *associatedSSB*, the UE shall be able to identify a new detectable CSI-RS based inter frequency cell within $T_{CSI-RS_identify_inter}$,

$$T_{CSI-RS_identify_inter} = (T_{PSS/SSS_sync} + T_{CSI-RS_measurement_period_inter} + T_{CSI-RS_SFN_inter})\ ms$$

Where:

T_{PSS/SSS_sync} is the time period used in PSS/SSS detection which is determined according to T_{PSS/SSS_sync_inter} in clause 9.3.4 in TS 38.133 [6],

TCSI-RS_SFN_inter is the time period used to acquire the SFN information of the cell being measured, which is shown in Table 4.6.9.0.1-2 for FR1,

$T_{CSI-RS_measurement_period_inter}$: equal to a measurement period of CSI-RS based measurement given in table 4.6.9.0.1-1.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5 in TS 38.133 [6] for measurement conducted within measurement gaps.

When UE supports concurrent measurement gaps or [*musim-GapPreference-r17]* or both concurrent measurement gap and [*musim-GapPreference-r17]*, and concurrent measurement gaps or periodic MUSIM gaps or both concurrent gaps and periodic MUSIM gaps are configured, K_{p_CSI-RS} is the scaling factor for a CSI-RS frequency layer to be measured within the associated measurement gap which is defined as $K_{p_CSI-RS} = N_{total} / N_{available}$. $K_{p_CSI-RS} = 1$ for UE not configured with concurrent measurement gaps and MUSIM gaps.

- For a window W of duration max(CSI-RS period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE MG, periodic MUSIM gaps, and per-FR MG within the same FR as the CSI-RS frequency layer, and starting at the beginning of any gap occasions covering the CSI-RS resources.:

- N_{total} is the total number of associated gap occasions covering CSI-RS resources within the window, including those overlapped with other measurement gap and MUSIM gap instances within the window, and

- $N_{available}$ is the number of non-dropped associated gap occasions covering CSI-RS resources within the window W, after accounting for MG and MUSIM gap collisions by applying the collision rules for the measurement gap and MUSIM gap in section 9.1.8.3 and 9.1.10.5 in TS 38.133[6], respectively.

- Requirements do not apply if $N_{available} = 0$

When UE supports [*musim-GapPreference-r17*] and if the configured aperiodic MUSIM gap collides with the measurement gap associated with the target frequency layer, where MUSIM gap collision rule in section 9.1.10.4 in TS 38.133 [6] is applied, longer cell identification period for the target inter-frequency is expected.

Additionally, for a given CSI-RS resource, if the associated SSB is configured but not detected by the UE, or if CSI-RS configured with associated SSB but not QCL-ed to the associated SSB, the UE is not required to monitor the corresponding CSI-RS resource.

Table 4.6.9.0.1-1: Measurement period for CSI-RS based inter-frequency measurements with gaps (FR1)

Condition NOTE1,2	$T_{CSI\text{-}RS_measurement_period_inter}$
No DRX	$Max(200ms, ceil(8 \times K_{p_CSI\text{-}RS}) \times Max(MGRP, CSI\text{-}RS\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(8 \times 1.5 \times K_{p_CSI\text{-}RS})) \times Max(MGRP, CSI\text{-}RS\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(8 \times K_{p_CSI\text{-}RS}) \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 in TS 38.133 [6]	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 in TS 38.133 [6] are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: If UE support concurrent gaps and multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the CSI-RS resources of the inter-frequency layer.	
NOTE 4: $K_{p_CSI\text{-}RS}$ is applicable for a UE supporting concurrent gaps and/or MUSIM gaps.	

Table 4.6.9.0.1-2: Time period for SFN acquisition for inter-frequency CSI-RS based measurements with gaps (FR1)

Condition NOTE1,2	$T_{CSI\text{-}RS_SFN_inter}$
No DRX	$Max(200ms, ceil(5 \times K_{p_CSI\text{-}RS}) \times Max(MGRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(5 \times 1.5 \times K_{p_CSI\text{-}RS}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(5 \times K_{p_CSI\text{-}RS}) \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 in TS 38.133 [6]	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 in TS 38.133 [6] are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: If UE support concurrent gaps and multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to *associatedSSB*.	
NOTE 4: $K_{p_CSI\text{-}RS}$ is applicable for a UE supporting concurrent gaps and/or MUSIM gaps.	

4.7 Measurement performance requirements

4.7.1 SS-RSRP

4.7.1.0 Minimum conformance requirements

4.7.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements

The intra-frequency SS-RSRP absolute accuracy requirements are defined for the SS-RSRP measured from a cell on the same frequency as that of the PCell or PSCell in FR1.

The accuracy requirements in Table 4.7.1.0.1-1 are valid under the following conditions:

- Conditions defined in 38.101-1 [2] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 4.7.1.0.1-1: SS-RSRP intra frequency absolute accuracy in FR1

Accuracy		Conditions					
			Io [Note 1] range				
Normal condition	Extreme condition	SSB $\hat{E}s/Iot$	NR operating band groups [Note 2]	Minimum Io			Maximum Io
				dBm / SCS_{SSB}			
dB	dB	dB		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
±4.5	±9	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±8	±11	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_G, NR_FDD_FR1_H,	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in Section 3A.4.1

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

Table 4.7.1.0.1-2: SS-RSRP and CSI-RSRP measurement report mapping

Reported value	Measured quantity value(L3 SS-RSRP)	Measured quantity value(L1 SS-RSRP and CSI-RSRP)	Unit
RSRP_0	SS-RSRP<-156	Not valid	dBm
RSRP_1	-156≤ SS-RSRP<-155	Not valid	dBm
RSRP_2	-155≤ SS-RSRP<-154	Not valid	dBm
RSRP_3	-154≤ SS-RSRP<-153	Not valid	dBm
RSRP_4	-153≤ SS-RSRP<-152	Not valid	dBm
RSRP_5	-152≤ SS-RSRP<-151	Not valid	dBm
RSRP_6	-151≤ SS-RSRP<-150	Not valid	dBm
RSRP_7	-150≤ SS-RSRP<-149	Not valid	dBm

Reported value	Measured quantity value(L3 SS-RSRP)	Measured quantity value(L1 SS-RSRP and CSI-RSRP)	Unit
RSRP_8	-149≤ SS-RSRP<-148	Not valid	dBm
RSRP_9	-148≤ SS-RSRP<-147	Not valid	dBm
RSRP_10	-147≤ SS-RSRP<-146	Not valid	dBm
RSRP_11	-146≤ SS-RSRP<-145	Not valid	dBm
RSRP_12	-145≤ SS-RSRP<-144	Not valid	dBm
RSRP_13	-144≤ SS-RSRP<-143	Not valid	dBm
RSRP_14	-143≤ SS-RSRP<-142	Not valid	dBm
RSRP_15	-142≤ SS-RSRP<-141	Not valid	dBm
RSRP_16	-141≤ SS-RSRP<-140	RSRP<-140	dBm
RSRP_17	-140≤ SS-RSRP<-139	-140≤ RSRP<-139	dBm
RSRP_18	-139≤ SS-RSRP<-138	-139≤ RSRP<-138	dBm
…	…		…
RSRP_111	-46≤ SS-RSRP<-45	-46≤ RSRP<-45	dBm
RSRP_112	-45≤ SS-RSRP<-44	-45≤ RSRP<-44	dBm
RSRP_113	-44≤ SS-RSRP<-43	-44≤ RSRP	dBm
RSRP_114	-43≤ SS-RSRP<-42	Not valid	dBm
RSRP_115	-42≤ SS-RSRP<-41	Not valid	dBm
RSRP_116	-41≤ SS-RSRP<-40	Not valid	dBm
RSRP_117	-40≤ SS-RSRP<-39	Not valid	dBm
RSRP_118	-39≤ SS-RSRP<-38	Not valid	dBm
RSRP_119	-38≤ SS-RSRP<-37	Not valid	dBm
RSRP_120	-37≤ SS-RSRP<-36	Not valid	dBm
RSRP_121	-36≤ SS-RSRP<-35	Not valid	dBm
RSRP_122	-35≤ SS-RSRP<-34	Not valid	dBm
RSRP_123	-34≤ SS-RSRP<-33	Not valid	dBm
RSRP_124	-33≤ SS-RSRP<-32	Not valid	dBm
RSRP_125	-32≤ SS-RSRP<-31	Not valid	dBm
RSRP_126	-31≤ SS-RSRP	Not valid	dBm
RSRP_127[1]	Infinity	Infinity	dBm
NOTE: The value of RSRP_127 is applicable for RSRP threshold configured by the network as defined in TS 38.331 [13], but not for the purpose of measurement reporting.			

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.2.1.1 and 10.1.6.

4.7.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements

The intra-frequency relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency in FR1.

The accuracy requirements in Table 4.7.1.0.2-1 are valid under the following conditions:

- Conditions defined in 38.101-1 [2] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 4.7.1.0.2-1: SS-RSRP Intra frequency relative accuracy in FR1

Accuracy		Conditions				
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range			
			NR operating band groups Note 4	Minimum Io		Maximum Io
				dBm / SCS_{SSB}		
dB	dB	dB		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
±2	±3	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50

			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3	±3	≥-6	Note 3	Note 3	Note 3	N/A	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in Section 3A.4.1.							

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.2.1.2 and 10.1.6.

4.7.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements

The inter-frequency SS-RSRP absolute accuracy requirements in this clause are defined for the SS-RSRP measured from a cell on a different frequency as that of the PCell or PSCell in FR1.

The accuracy requirements in Table 4.7.1.0.3-1 are valid under the following conditions:

- Conditions defined in TS 38.101-1 [2] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to clause B.2.3 for a corresponding Band for each relevant SSB.

Table 4.7.1.0.3-1: SS-RSRP inter frequency absolute accuracy in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 2	**Io** Note 1 **range**				
			NR operating band groups Note 3	**Minimum Io**			**Maximum Io**
				dBm / SCS_{SSB}			
dB	**dB**	**dB**		**SCS_{SSB} = 15 kHz**	**SCS_{SSB} = 30 kHz**	**$dBm/BW_{Channel}$**	**$dBm/BW_{Channel}$**
±4.5	±9	≥6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±8	±11	≥6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_G,	N/A	N/A	-70	-50

			NR_FDD_FR1_H,				
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: Void. NOTE 3: NR operating band groups in FR1 are as defined in Section 3A.4.1.							

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.4.1.1 and 10.1.6.

4.7.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements

The inter-frequency SS-RSRP relative accuracy requirements in this clause are defined for the SS-RSRP measured from one cell on a frequency in FR1compared to the SS-RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 4.7.1.0.4-1 are valid under the following conditions:

- Conditions defined in 38.101-1 [2] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB,
- $\left|RSRP1\right|_{dBm} - RSRP2\left|_{dBm}\right| \leq 27dB$
- | Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 4.7.1.0.4-1: SS-RSRP inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
				dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
dB	dB	dB		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.5	±6	≥6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: NR operating band groups in FR1 are as defined in Section 3A.4.1.							

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.4.1.2 and 10.1.6.

4.7.1.1 Intra-frequency measurements

4.7.1.1.1 EN-DC FR1 SS-RSRP absolute measurement accuracy

4.7.1.1.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

4.7.1.1.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.7.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.1.1.

4.7.1.1.1.4 Test description

4.7.1.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.1.1.1.4.1-1.

Table 4.7.1.1.1.4.1-1: EN-DC FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
4.7.1.1.1-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.1.1.1-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.1.1.1-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.1.1.1-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.1.1.1-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.1.1.1-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.1.1.1.4.1-2.

Table 4.7.1.1.1.4.1-2: Initial conditions for SS-RSRP intra frequency absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.1.1.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell

3 is the target cell for SS-RSRP measurements. The connection setup is done according to the settings in clause C.1.1.

4.7.1.1.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 4.7.1.1.1.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport. The SS-RSRP value of Cell 3 reported by the UE is compared to the expected SS-RSRP. If the value is outside the limits in Table 4.7.1.1.1.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 4.7.1.1.1.5-1 as appropriate and repeat steps 5-7.

4.7.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.1.1.1.4.3-1: Common Exception messages for EN-DC FR1 SS-RSRP absolute measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2
Specific message contents exceptions for Test Configuration 4.7.1.1.1.-1 and 4.7.1.1.1-4	Table H.3.1-3 with Condition SSB.1 FR1 and Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.7.1.1.1-2 and 4.7.1.1.1-5	Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.7.1.1.1-3 and 4.7.1.1.1-6	Table H.3.1-3 with Condition SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.1.1.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for EN-DC FR1 SS-RSRP Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			

maxReportCells	2		
}			
}			
}			

4.7.1.1.1.5 Test requirement

Table 4.7.1.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 4.7.1.1.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.1.1.1.5-2 for test configurations 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 4.7.1.1.1.5-3 for test configurations 3 and 6.

Table 4.7.1.1.1.5-1: EN-DC FR1 SS-RSRP measurement accuracy test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
BWP BW	Config 1,4		10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
Downlink initial BWP configuration			DLBWP.0					
Downlink dedicated BWP configuration			DLBWP.1					
Uplink dedicated BWP configuration			ULBWP.1					
DRx Cycle		ms	Not Applicable					
TRS Configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.2.1 TDD		TRS.2.1 TDD		TRS.2.1 TDD	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control Channel RMC	Config 1,4		CCR.1.1 FD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1,4		SSB 1.FR1	SSB.1 FR1	SSB 1.FR1	SSB.1 FR1	SSB 1.FR1	SSB.1 FR1
	Config 2,5		SSB 1.FR1	SSB.1 FR1	SSB 1.FR1	SSB.1 FR1	SSB 1.FR1	SSB.1 FR1
	Config 3,6		SSB 2.FR1	SSB.2 FR1	SSB 2.FR1	SSB.2 FR1	SSB 2.FR1	SSB.2 FR1
Time offset with Cell 2	Config 1,4	ms	-	3	-	3	-	3

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
		Config 2,3,5,6	μs	-	3	-	3	-	3
SMTC Configuration		Config 1,4		SMTC.2					
		Config 2,3,5,6		SMTC.1					
OCNG Patterns				OP.1					
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15 kHz					
		Config 3,6		30kHz					
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)			dB	0	0	0	0	0	0
N_{oc} Note2	Config 1,2,4,5	Depending on band group	dBm/15KhZ	-107.5		-88		-114 + Δ_{BG_offset}	
	Config 3,6	Depending on band group		N/A Note 6		-94		-115 + Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-107.4		-88		Same as Noc/15kHz	
	Config 3,6	Depending on band group		N/A Note 6		-91		-112 + Δ_{BG_offset}	
$\hat{E}_s / I_{ot}$			dB	2.23	-5.57	2.23	-5.57	0.37	-5.56
$\hat{E}_s / N_{oc}$			dB	6	1.4	6	1.4	3	-0.8
SS-RSRP Note3	Config 1,2,4,5	Depending on band group	dBm/SCS	-101.5	-106.1	-82	-86.6	-111 + Δ_{BG_offset}	-114.8 + Δ_{BG_offset}
	Config 3,6	Depending on band group		N/A Note 6	N/A Note 6	-85	-89.6	-109+ Δ_{BG_offset}	-112.8+ Δ_{BG_offset}
Io Note3	Config 1,2,4,5	Depending on band group	dBm/ 9.36MHz	-71.68		-52.18		-80.39+ Δ_{BG_offset}	
	Config 3,6	Depending on band group	dBm/ 38.16MHz	N/A Note 6		-51.91		-75.12 + Δ_{BG_offset}	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.
Note 6: Subtest 1 is not used when testing with 30kHz SSB SCS

Table 4.7.1.1.1.5-2: SS-RSRP Intra frequency absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest reported value (Cell 3)	44	60	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	36
			Bands NR_FDD_FR1_B	36
			Bands NR_TDD_FR1_C	37

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	37
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	38
			Bands NR_FDD_FR1_G	39
			Bands NR_FDD_FR1_H	39
Highest reported value (Cell 3)	56	79	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	48
			Bands NR_FDD_FR1_B	48
			Bands NR_TDD_FR1_C	49
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	49
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	50
			Bands NR_FDD_FR1_G	51
			Bands NR_FDD_FR1_H	51
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 3)	40	57	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	31
			Bands NR_FDD_FR1_B	32
			Bands NR_TDD_FR1_C	32
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	33
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	33
			Bands NR_FDD_FR1_G	34
			Bands NR_FDD_FR1_H	35
Highest reported value (Cell 3)	61	82	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	52
			Bands NR_FDD_FR1_B	53
			Bands NR_TDD_FR1_C	53
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	54
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	54
			Bands NR_FDD_FR1_G	55
			Bands NR_FDD_FR1_H	56
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.				

Table 4.7.1.1.1.5-3: SS-RSRP Intra frequency absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest reported value (Cell 3)	N/A	57	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	38
			Bands NR_FDD_FR1_B	38
			Bands NR_TDD_FR1_C	39
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	39
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	40
			Bands NR_FDD_FR1_G	41
			Bands NR_FDD_FR1_H	41
Highest reported value (Cell 3)	N/A	76	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	50
			Bands NR_FDD_FR1_B	50
			Bands NR_TDD_FR1_C	51

			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	51
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	52
			Bands NR_FDD_FR1_G	53
			Bands NR_FDD_FR1_H	53
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 3)	N/A	54	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	33
			Bands NR_FDD_FR1_B	34
			Bands NR_TDD_FR1_C	34
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	35
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	35
			Bands NR_FDD_FR1_G	36
			Bands NR_FDD_FR1_H	37
Highest reported value (Cell 3)	N/A	79	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	54
			Bands NR_FDD_FR1_B	55
			Bands NR_TDD_FR1_C	55
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	56
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	56
			Bands NR_FDD_FR1_G	57
			Bands NR_FDD_FR1_H	58
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.				

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.1.1.2 EN-DC FR1 SS-RSRP relative measurement accuracy

4.7.1.1.2.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP relative measurement accuracy is within the specified limits for all bands.

4.7.1.1.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.7.1.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.1.1.

4.7.1.1.2.4 Test description

4.7.1.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.1.1.2.4.1-1.

Table 4.7.1.1.2.4.1-1: EN-DC FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
4.7.1.1.2-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD

4.7.1.1.2-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.1.1.2-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.1.1.2-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.1.1.2-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.1.1.2-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.1.1.2.4.1-2.

Table 4.7.1.1.2.4.1-2: Initial conditions for SS-RSRP intra frequency relative accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.1.1.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the target cell for SS-RSRP measurements. The connection setup is done according to the settings in clause C.1.1.

4.7.1.1.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 4.7.1.1.2.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values of Cell 2 and Cell 3 in the periodic MeasurementReport. The SS-RSRP value of Cell 3 reported by the UE is compared to the reported SS-RSRP of Cell 2. If the resulting value is outside the limits in Table 4.7.1.1.2.5-2 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 4.7.1.1.2.5-1 as appropriate and repeat steps 5-7.

4.7.1.1.2.4.3 Message contents

Message contents are same as in clause 4.7.1.1.1.4.3.

4.7.1.1.2.5 Test requirement

Table 4.7.1.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 4.7.1.1.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.1.1.2.5-2.

Table 4.7.1.1.2.5-1: Same as Table 4.7.1.1.1.5-1 with the following exceptions:

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
N_{oc} Note2	Config 1,2,4,5	Depending on band group	dBm/15KhZ	-106		-88		-114 + Δ_{BG_offset}	
	Config 3,6	Depending on band group		N/A		-94		-114 + Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	Same as Noc/15kHz		Same as Noc/15kHz		Same as Noc/15kHz	
	Config 3,6	Depending on band group		N/A		-91		-111 + Δ_{BG_offset}	
$\hat{E}_s/I_{ot}$			dB	1.88	-4.97	1.88	-4.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	2	6	2	3	0
SS-RSRP Note3	Config 1,2,4,5	Depending on band group	dBm/SCS	-100	-104	-82	-86	-111 + Δ_{BG_offset}	-114 + Δ_{BG_offset}
	Config 3,6	Depending on band group		N/A	N/A	-85	-89	-108 + Δ_{BG_offset}	-111 + Δ_{BG_offset}
Io Note3	Config 1,2,4,5	Depending on band group	dBm/ 9.36MHz	-70.05		-52.05		-80.20+ Δ_{BG_offset}	
	Config 3,6	Depending on band group	dBm/ 38.16MHz	N/A		-51.77		-73.93 + Δ_{BG_offset}	

Table 4.7.1.1.2.5-2: SS-RSRP Intra frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	RSRP_x - 8	RSRP_x - 8	RSRP_x - 7
Highest reported value (Cell 3)	RSRP_x - 1	RSRP_x - 1	RSRP_x + 1
Extreme Conditions			
Lowest reported value (Cell 3)	RSRP_x - 8	RSRP_x - 8	RSRP_x - 7
Highest reported value (Cell 3)	RSRP_x - 1	RSRP_x - 1	RSRP_x + 1
RSRP_x is the reported value of Cell 2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.1.2 Inter-frequency measurements

4.7.1.2.1 EN-DC FR1-FR1 SS-RSRP absolute measurement accuracy

4.7.1.2.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

4.7.1.2.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.7.1.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.1.2.

4.7.1.2.1.4 Test description

4.7.1.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.1.2.1.4.1-1.

Table 4.7.1.2.1.4.1-1: EN-DC FR1-FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
4.7.1.2.1-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.1.2.1-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.1.2.1-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.1.2.1-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.1.2.1-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.1.2.1-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.1.2.1.4.1-2.

Table 4.7.1.2.1.4.1-2: Initial conditions for SS-RSRP inter frequency absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.1.2.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in two different FR1 frequencies. Cell 2 is the PSCell and Cell 3 is the target cell for SS-RSRP measurements. The connection setup is done according to the settings in clause C.1.1.

4.7.1.2.1.4.2 Test procedure

Same as in clause 4.7.1.1.1.4.2 but replacing Table 4.7.1.1.1.5-1 and 4.7.1.1.1.5-2 with 4.7.1.2.1.5-1 and 4.7.1.2.1.5-2, respectively.

4.7.1.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.1.2.1.4.3-1: Common Exception messages for EN-DC FR1-FR1 SS-RSRP absolute measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern#0
Specific message contents exceptions for Test Configuration 4.7.1.1.1.-1 and 4.7.1.1.1-4	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.7.1.1.1-2 and 4.7.1.1.1-5	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.7.1.1.1-3 and 4.7.1.1.1-6	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.1.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for EN-DC FR1-FR1 SS-RSRP Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

4.7.1.2.1.5 Test requirement

Table 4.7.1.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 4.7.1.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.1.2.1.5-2 for test configurations 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 4.7.1.2.1.5-3 for test configurations 3 and 6.

Table 4.7.1.2.1.5-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1~6		freq1	freq2	freq1	freq2
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2,5		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3,6		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	

Parameter		Config	Unit	Test 1		Test 2	
				Cell 2	Cell 3	Cell 2	Cell 3
Gap pattern ID				0		0	
Duplex mode		1,4		FDD		FDD	
		2,5		TDD		TDD	
		3,6		TDD		TDD	
TDD configuration		1,4		N/A		N/A	
		2,5		TDDConf.1.1		TDDConf.1.1	
		3,6		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel		1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
		2,5		SR.1.1 TDD		SR.1.1 TDD	
		3,6		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel		1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
		2,5		CR.1.1 TDD	-	CR.1.1 TDD	-
		3,6		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel		1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
		2,5		CCR.1.1 TDD	-	CCR.1.1 TDD	-
		3,6		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration		1,4		SSB.1 FR1		SSB.1 FR1	
		2,5		SSB.1 FR1		SSB.1 FR1	
		3,6		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns		1~6		OP.1		OP.1	
TRS configuration		1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-
		2,5		TRS.1.1 TDD		TRS.1.1 TDD	
		3,6		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration		1~6		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
SMTC configuration		1,4		SMTC.2		SMTC.2	
		2,3,5,6		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 3		1,4	ms	3		3	
		2,3,5,6	µs	3		3	
EPRE ratio of PSS to SSS		1~6	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS Note 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
N_{oc} Note2	Depending on band group	1,2,4,5	dBm/15kHz	-94.65	-94.65	(N_{oc} for Cell 3 +8dB)	-115+ Δ_{BG_offset}
N_{oc} Note2	Depending on band group	3,6	dBm/15kHz	-96	-96	(N_{oc} for Cell 3 +8dB)	-115+ Δ_{BG_offset}
N_{oc} Note2	Depending on band group	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	(N_{oc} for Cell 3 +8dB)	-115+ Δ_{BG_offset}
	Depending on band group	3,6		-93	-93	(N_{oc} for C 3 +8dB)	-112.00+ Δ_{BG_offset}
$\hat{E}_s/I_{ot}$		1~6	dB	10	10	13	-3
SS-RSRP Note3	Depending on band group	1,2,4,5	dBm/SCS	-84.65	-84.65	(RSRP for Cell 3 +24dB)	-118.00+ Δ_{BG_offset}
	Depending on	3,6		-83	-83	(RSRP for Cell 3	-115.00+

Parameter		Config	Unit	Test 1		Test 2	
				Cell 2	Cell 3	Cell 2	Cell 3
	band group					+24dB)	Δ_{BG_offset}
Io^{Note3}	Depending on band group	1,2,4,5	dBm/ 9.36MHz	56.28	56.28	(Io for Channel 3 +19.45dB)	-85.28+ Δ_{BG_offset}
	Depending on band group	3,6	dBm/ 38.16MHz	-51.53	-51.53	(Io for Channel 3 +19.45dB)	-79.19+ Δ_{BG_offset}
$\hat{E}_s / N_{oc}$		1~6	dB	10	10	13	-3
Propagation condition		1~6	-	AWGN		AWGN	
Antenna configuration				1x2		1x2	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5 The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
NOTE 6: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.

Table 4.7.1.2.1.5-2: SS-RSRP Inter frequency absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 3)	62	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	32
		Bands NR_FDD_FR1_B	33
		Bands NR_TDD_FR1_C	33
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	34
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	34
		Bands NR_FDD_FR1_G	35
		Bands NR_FDD_FR1_H	36
Highest reported value (Cell 3)	81	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	45
		Bands NR_FDD_FR1_B	45
		Bands NR_TDD_FR1_C	46
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	46
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	47
		Bands NR_FDD_FR1_G	48
		Bands NR_FDD_FR1_H	48
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 3)	59	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	28
		Bands NR_FDD_FR1_B	28
		Bands NR_TDD_FR1_C	29
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	29
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	30
		Bands NR_FDD_FR1_G	31

		Bands NR_FDD_FR1_H	31
Highest reported value (Cell 3)	84	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	49
		Bands NR_FDD_FR1_B	50
		Bands NR_TDD_FR1_C	50
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	51
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	51
		Bands NR_FDD_FR1_G	52
		Bands NR_FDD_FR1_H	53
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 4.7.1.2.1.5-3: SS-RSRP Inter frequency absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 3)	64	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	35
		Bands NR_FDD_FR1_B	36
		Bands NR_TDD_FR1_C	36
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	37
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	37
		Bands NR_FDD_FR1_G	38
		Bands NR_FDD_FR1_H	39
Highest reported value (Cell 3)	83	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	48
		Bands NR_FDD_FR1_B	48
		Bands NR_TDD_FR1_C	49
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	49
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	50
		Bands NR_FDD_FR1_G	51
		Bands NR_FDD_FR1_H	51
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 3)	61	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	31
		Bands NR_FDD_FR1_B	31
		Bands NR_TDD_FR1_C	32
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	32
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	33
		Bands NR_FDD_FR1_G	34
		Bands NR_FDD_FR1_H	34
Highest reported value (Cell 3)	86	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	52
		Bands NR_FDD_FR1_B	53
		Bands NR_TDD_FR1_C	53
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	54
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	54
		Bands NR_FDD_FR1_G	55
		Bands NR_FDD_FR1_H	56
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.1.2.2 EN-DC FR1-FR1 SS-RSRP relative measurement accuracy

4.7.1.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

4.7.1.2.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.7.1.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.1.2.

4.7.1.2.2.4 Test description

4.7.1.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.1.2.2.4.1-1.

Table 4.7.1.2.2.4.1-1: EN-DC FR1-FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
4.7.1.2.2-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.1.2.2-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.1.2.2-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.1.2.2-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.1.2.2-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.1.2.2-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.1.2.2.4.1-2.

Table 4.7.1.2.2.4.1-2: Initial conditions for SS-RSRP inter frequency relative accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.1.2.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in two different FR1 frequencies. Cell 2 is the PSCell and Cell 3 is the target cell for SS-RSRP measurements. The connection setup is done according to the settings in clause C.1.1.

4.7.1.2.2.4.2 Test procedure

Same as in clause 4.7.1.1.2.4.2 but replacing Table 4.7.1.1.2.5-1 and 4.7.1.1.2.5-2 with 4.7.1.2.2.5-1 and 4.7.1.2.2.5-2, respectively.

4.7.1.2.2.4.3 Message contents

Message contents are same as in clause 4.7.1.2.1.4.3.

4.7.1.2.2.5 Test requirement

Table 4.7.1.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 4.7.1.2.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.1.2.2.5-2.

Table 4.7.1.2.2.5-1: same as Table 4.7.1.2.1.5-1

Table 4.7.1.2.2.5-2: SS-RSRP Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	SS-RSRP_x - 7	SS-RSRP_x - 31
Highest reported value (Cell 3)	SS-RSRP_x + 7	SS-RSRP_x - 18
Extreme Conditions		
Lowest reported value (Cell 3)	SS-RSRP_x - 9	SS-RSRP_x - 33
Highest reported value (Cell 3)	SS-RSRP_x + 9	SS-RSRP_x - 17
SS-RSRP_x is the reported value of Cell 2		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.2 SS-RSRQ

4.7.2.0 Minimum conformance requirements

4.7.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements

The intra-frequency SS-RSRQ accuracy requirements are defined for the SS-RSRQ measured from a cell on the same frequency as that of the PCell or PSCell in FR1.

The accuracy requirements in Table 4.7.2.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 4.7.2.0.1-1: SS-RSRQ Intra frequency absolute accuracy in FR1

Accuracy		Conditions	
Normal	Extreme	SSB	Io [Note 1] range

condition	condition	Ês/Iot	NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±2.5	±4	≥-3 dB	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3.5	±4	≥-6 dB	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in Section 3A.4.1.

The reporting range of SS-RSRQ is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.2.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 4.7.2.0.1-2: SS-RSRQ measurement report mapping

Reported value	Measured quantity value	Unit
SS-RSRQ_0	SS-RSRQ<-43	dB
SS-RSRQ_1	-43≤ SS-RSRQ<-42.5	dB
SS-RSRQ_2	-42.5≤ SS-RSRQ<-42	dB
SS-RSRQ_3	-42≤ SS-RSRQ<-41.5	dB
SS-RSRQ_4	-41.5≤ SS-RSRQ<-41	dB
..	..	…
SS-RSRQ_122	17.5≤ SS-RSRQ<18	dB
SS-RSRQ_123	18≤ SS-RSRQ<18.5	dB
SS-RSRQ_124	18.5≤ SS-RSRQ<19	dB
SS-RSRQ_125	19≤ SS-RSRQ<19.5	dB
SS-RSRQ_126	19.5≤ SS-RSRQ<20	dB
SS-RSRQ_127	20 ≤ SS-RSRQ	dB

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.7.1.1 and 10.1.11.

4.7.2.0.2 Inter-frequency absolute SS-RSRQ measurement accuracy requirements

The inter-frequency SS-RSRQ absolute accuracy requirements in this clause are defined for the SS-RSRQ measured from a cell on a different frequency as that of the PCell or PSCell in FR1.

The accuracy requirements in Table 4.7.2.0.2-1 are valid under the following conditions:

- Conditions defined in 38.101-1 [2] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

Table 4.7.2.0.2-1: SS-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 1 range		
			NR operating band	Minimum Io	Maximum Io

			groups Note 3				
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±2.5	±4	≥-3 dB	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3.5	±4	≥-6 dB	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: NR operating band groups in FR1 are as defined in Section 3A.4.1.							

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.9.1.1 and 10.1.11.

4.7.2.0.3 Inter-frequency relative SS-RSRQ measurement accuracy requirements

The inter-frequency SS-RSRQ relative accuracy requirements in this clause are defined for the SS-RSRQ measured from one cell on a frequency in FR1compared to the SS-RSRQ measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 4.7.2.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- $|$ Channel 1_Io -Channel 2_Io $| \leq 20$ dB

Table 4.7.2.0.3-1: SS-RSRQ Inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}s/Iot$ Note 2	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3	±4	≥-3 dB	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4	±4	≥-6 dB	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							

NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in Section 3A.4.1.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.9.1.2 and 10.1.11.

4.7.2.1 EN-DC FR1 SS-RSRQ measurement accuracy

4.7.2.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRQ measurement accuracy is within the specified limits for all bands.

4.7.2.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.7.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.2.1.

4.7.2.1.4 Test description

4.7.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.2.1.4.1-1.

Table 4.7.2.1.4.1-1: EN-DC FR1 SS-RSRQ measurement accuracy supported test configurations

Test Case ID	Description
4.7.2.1-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.2.1-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.2.1-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.2.1-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.2.1-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.2.1-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.2.1.4.1-2.

Table 4.7.2.1.4.1-2: Initial conditions for SS-RSRQ intra frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to	N/A		

connection diagram		

1. Message contents are defined in clause 4.7.2.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the target cell for SS-RSRQ measurements. The connection setup is done according to the settings in clause C.1.3.

4.7.2.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 4.7.2.1.5-1 as appropriate.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit an RRCConnectionReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport. The SS-RSRQ value of Cell 3 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 4.7.2.1.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 4.7.2.1.5-1 as appropriate and repeat steps 5-7.

4.7.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.2.1.4.3-1: Common Exception messages for EN-DC FR1 SS-RSRQ measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2
Specific message contents exceptions for Test Configuration 4.7.2.1-1 and 4.7.2.1-4	Table H.3.1-3 with Condition SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.7.2.1-2 and 4.7.2.1-5	Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.7.2.1-3 and 4.7.2.1-6	Table H.3.1-3 with Condition SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for EN-DC FR1 SS-RSRQ Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**

ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

4.7.2.1.5 Test requirement

Table 4.7.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 4.7.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.2.1.5-2.

Table 4.7.2.1.5-1: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1					
SS-RSSI-Measurement			Not Applicable					
Time offset with	Config 2,3,5,6	µs	-	3	-	3	-	3

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Cell 2		Config 1,4	ms	-	3	-	3	-	3
STMC configuration		Config 2,3,5,6		SMTC.1					
		Config 1,4		SMTC.2					
SSB configuration		Config 1,2,4,5		SSB.1 FR1					
		Config 3,6		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15 kHz					
		Config 3,6		30kHz					
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)			dB	0	0	0	0	0	0
N_{oc} Note2	Config 1,2,4,5	Depending on band group	dBm/15kHz	-86.5		-101		-114+ Δ_{BG_offset}	
	Config 3,6	Depending on band group		-92.6		-		-114+ Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4,5	Depending on band group	dBm/SCS	-86.5		-101		-114+ Δ_{BG_offset}	
	Config 3,6	Depending on band group		-89.6		-		-111+ Δ_{BG_offset}	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note3	Config 1,2,4,5	Depending on band group	dBm/SCS	-83.5	-83.5	-103.9	-103.9	-118+Δ_{BG_offset}	-118+ Δ_{BG_offset}
	Config 3,6	Depending on band group		-86.6	-86.6	-	-	-115+ Δ_{BG_offset}	-115+ Δ_{BG_offset}
SS-RSRQ Note3			dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
Io Note3	Config 1,2,4,5	Depending on band group	dBm/9.36MHz	-51.57		-70		-83.50+ Δ_{BG_offset}	
	Config 3,6	Depending on band group	dBm/38.16MHz	-51.56		-		-77.40+ Δ_{BG_offset}	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.
NOTE 6: Subtest 2 is not used when testing with 30kHz SSB SCS.
NOTE 7: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 4.7.2.1.5-2: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_52	SS-RSRQ_46	SS-RSRQ_44

Highest reported value (Cell 3)	SS-RSRQ_62	SS-RSRQ_60	SS-RSRQ_59
Extreme Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_49	SS-RSRQ_45	SS-RSRQ_43
Highest reported value (Cell 3)	SS-RSRQ_65	SS-RSRQ_61	SS-RSRQ_60

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.2.2 Inter-Frequency SS-RSRQ measurement accuracy

4.7.2.2.1 EN-DC FR1-FR1 SS-RSRQ absolute measurement accuracy

4.7.2.2.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRQ absolute measurement accuracy is within the specified limits for all bands.

4.7.2.2.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.7.2.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.2.2.1.

4.7.2.2.1.4 Test description

4.7.2.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.2.2.1.4.1-1.

Table 4.7.2.2.1.4.1-1: EN-DC FR1-FR1 SS-RSRQ measurement accuracy supported test configurations

Test Case ID	Description
4.7.2.2.1-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.2.2.1-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.2.2.1-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.2.2.1-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.2.2.1-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.2.2.1-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.2.2.1.4.1-2.

Table 4.7.2.2.1.4.1-2: Initial conditions for SS-RSRQ inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.2.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	

	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.2.2.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in two different FR1 frequencies. Cell 2 is the PSCell and Cell 3 is the target cell for SS-RSRQ measurements. The connection setup is done according to the settings in clause C.1.1.

4.7.2.2.1.4.2 Test procedure

Same as in clause 4.7.2.1.4.2 but replacing Table 4.7.2.1.5-1 and 4.7.2.1.5-2 with 4.7.2.2.1.5-1 and 4.7.2.2.1.5-2, respectively.

4.7.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.2.2.1.4.3-1: Common Exception messages for EN-DC FR1-FR1 SS-RSRQ absolute measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern#0
Specific message contents exceptions for Test Configuration 4.7.2.1.1.-1 and 4.7.2.1.1-4	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.7.2.1.1-2 and 4.7.2.1.1-5	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.7.2.1.1-3 and 4.7.2.1.1-6	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.2.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for EN-DC FR1-FR1 SS-RSRQ Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
sinr	false		
}			
maxReportCells	2		

}			
}			
}			

4.7.2.2.1.5 Test requirement

Table 4.7.2.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 4.7.2.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.2.2.1.5-2

Table 4.7.2.2.1.5-1: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
Gap pattern ID	Config 1-6		0					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP.1					
SMTC configuration	Config 2,3,5,6		SMTC.1					
	Config 1,4		SMTC.2					
Time offset between Cell 2 and Cell 3	Config 2,3,5,6	µs	3					
	Config 1,4	ms	3					
SSB configuration	Config 1,2,4,5		SSB.1 in FR1					
	Config 3,6		SSB.2 in FR1					
PDSCH/PDCCH	Config 1,2,4,5	kHz	15 kHz					

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
subcarrier spacing		Config 3,6		30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	Depending on band group	dBm/15kHz	-81.68	-81.68	-106	-106	-116 + Δ_{BG_offset}	-116 + Δ_{BG_offset}
N_{oc} Note2	Config 3,6	Depending on band group	dBm/15kHz	-87.80	-87.80	-113	-113	-116+ Δ_{BG_offset}	-116+ Δ_{BG_offset}
N_{oc} Note2	Config 1,2,4,5	Depending on band group	dBm/SCS	-81.68	-81.68	-106	-106	-116 + Δ_{BG_offset}	-116 + Δ_{BG_offset}
	Config 3,6	Depending on band group		-84.8	-84.8	-110	-110	-113+ Δ_{BG_offset}	-113+ Δ_{BG_offset}
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
SS-RSRP Note 3	Config 1,2,4,5	Depending on band group	dBm/SCS	-83.43	-83.43	-107.75	-107.75	-113+ Δ_{BG_offset}	-117.75 + Δ_{BG_offset}
	Config 3,6	Depending on band group		-86.54	-86.54	-111.75	-111.75	-110+ Δ_{BG_offset}	-114.75 + Δ_{BG_offset}
SS-RSRQ Note3			dB	-14.76	-14.76	-14.76	-14.76	-12.56	-14.76
Io Note3	Config 1,2,4,5	Depending on band group	dBm/Ch BW	-51.51	-51.51	-75.83	-75.83	-83.28+ Δ_{BG_offset}	-85.83+ Δ_{BG_offset}
	Config 3,6	Depending on band group		-51.52	-51.52	-76.73	-76.73	-77.19+ Δ_{BG_offset}	-79.73+ Δ_{BG_offset}
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

NOTE 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

NOTE 5: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.

NOTE 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 4.7.2.2.1.5-2: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_52	SS-RSRQ_52	SS-RSRQ_52
Highest reported value (Cell 3)	SS-RSRQ_62	SS-RSRQ_62	SS-RSRQ_62
Extreme Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_49	SS-RSRQ_49	SS-RSRQ_49
Highest reported value (Cell 3)	SS-RSRQ_65	SS-RSRQ_65	SS-RSRQ_65

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.2.2.2 EN-DC FR1-FR1 SS-RSRQ relative measurement accuracy

4.7.2.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRQ relative measurement accuracy is within the specified limits for all bands.

4.7.2.2.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.7.2.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.2.2.2.

4.7.2.2.2.4 Test description

4.7.2.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.2.2.2.4.1-1.

Table 4.7.2.2.2.4.1-1: EN-DC FR1-FR1 SS-RSRQ measurement accuracy supported test configurations

Test Case ID	Description
4.7.2.2.2-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.2.2.2-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.2.2.2-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.2.2.2-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.2.2.2-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.2.2.2-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.2.2.2.4.1-2.

Table 4.7.2.2.2.4.1-2: Initial conditions for SS-RSRQ inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.2.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5	As specified in TS 38.508-1 [14] Annex A.

Diagram		Hz	
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.2.2.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in two different FR1 frequencies. Cell 2 is the PSCell and Cell 3 is the target cell for SS-RSRQ measurements. The connection setup is done according to the settings in clause C.1.1.

4.7.2.2.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 4.7.2.2.2.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport. The SS-RSRQ value of Cell 3 reported by the UE is compared to the SS-RSRQ value of Cell 2 reported by the UE. If the difference between both values is outside the limits in Table 4.7.2.2.2.5-2 or the UE fails to report the measurement value for Cell 3 or Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 4.7.2.2.2.5-1 as appropriate and repeat steps 5-7.

4.7.2.2.2.4.3 Message contents

Message contents are same as in clause 4.7.2.2.1.4.3.

4.7.2.2.2.5 Test requirement

Table 4.7.2.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 4.7.2.2.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.2.2.2.5-2.

Table 4.7.2.2.2.5-1: same as Table 4.7.2.2.2.1.5-1

Table 4.7.2.2.2.5-2: SS-RSRQ Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_x - 7	SS-RSRQ_x - 7	SS-RSRQ_x - 11
Highest reported value (Cell 3)	SS-RSRQ_x + 7	SS-RSRQ_x + 7	SS-RSRQ_x + 2

Extreme Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_x - 9	SS-RSRQ_x - 9	SS-RSRQ_x - 13
Highest reported value (Cell 3)	SS-RSRQ_x + 9	SS-RSRQ_x + 9	SS-RSRQ_x + 4
RSRQ_x is the reported value of Cell 2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.3 SS-SINR

4.7.3.0 Minimum conformance requirements

4.7.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements

The intra-frequency SS-SINR accuracy requirements are defined for the SS-SINR measured from a cell on the same frequency as that of the PCell or PSCell in FR1.

The accuracy requirements in Table 4.7.3.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to clause B.2.2 for a corresponding Band.

Table 4.7.3.0.1-1: SS-SINR Intra frequency absolute accuracy in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 3	**Io** Note 1 **range**				
			NR operating band groups Note 4	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±3.0	±4	≥-3 dB	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3.5	±4	≥-6 dB	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB.
NOTE 4: NR operating band groups in FR1 are as defined in Section 3A.4.1.

The reporting range of SS-SINR and CSI-SINR is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.3.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 4.7.3.0.1-2: SS-SINR and CSI-RSRP measurement report mapping

Reported value	**Measured quantity value (L3 SS-SINR)**	**Measured quantity value (L1 SS-SINR and L1 CSI-SINR)**	**Unit**

SINR_0	SS-SINR<-23	SINR<-23	dB
SINR_1	-23≤ SS-SINR<-22.5	-23≤SINR<-22.5	dB
SINR_2	-22.5≤ SS-SINR<-22	-22.5≤SINR<-22	dB
SINR_3	-22≤ SS-SINR<-21.5	-22≤SINR<-21.5	dB
SINR_4	-21.5≤ SS-SINR<-21	-21.5≤SINR<-21	dB
..	..	..	…
SINR_123	38≤ SS-SINR<38.5	38≤SINR<38.5	dB
SINR_124	38.5≤ SS-SINR<39	38.5≤SINR<39	dB
SINR_125	39≤ SS-SINR<39.5	39≤SINR<39.5	dB
SINR_126	39.5≤ SS-SINR<40	39.5≤SINR<40	dB
SINR_127	40≤ SS-SINR	40≤SINR	dB

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.12.1.1 and 10.1.16.

4.7.3.0.2 Inter-frequency absolute SS-SINR measurement accuracy requirements

The intra-frequency SS-SINR accuracy requirements are defined for the SS-SINR measured from a cell on a different carrier frequency than that of the PCell or PSCell in FR1.

The accuracy requirements in Table 4.7.3.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.

Table 4.7.3.0.2-1: SS-SINR Inter frequency absolute accuracy in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 3	**Io** Note 1 **range**				
			NR operating band groups Note 4	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**$dBm/BW_{Channel}$**	**$dBm/BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±3.0	±4	≥-3 dB	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3.5	±4	≥-6 dB	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3A.4.1.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.13.1.1 and 10.1.16.

4.7.3.0.3 Inter-frequency relative SS-SINR measurement accuracy requirements

The inter-frequency SS-SINR relative accuracy requirements in this clause are defined for the SS-SINR measured from one cell on a frequency in FR1compared to the SS-SINR measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 4.7.3.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- | Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 4.7.3.0.3-1: SS-SINR Inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2,4	Io Note 1 range				
			NR operating band groups Note 5	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 120 kHz	SCS_{SSB} = 240 kHz		
±3.5	±4	≥-3 dB	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4	±4	≥-6 dB	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: The requirements apply for SSB Ês/Iot ≤ [25] dB.
NOTE 5: NR operating band groups in FR1 are as defined in clause 3.5.2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.13.1.2 and 10.1.16.

4.7.3.1 EN-DC FR1 SS-SINR measurement accuracy

4.7.3.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-SINR measurement accuracy is within the specified limits for all bands.

4.7.3.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards, which support ss-SINR-Meas.

4.7.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.3.1.

4.7.3.1.4 Test description

4.7.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.3.1.4.1-1.

Table 4.7.3.1.4.1-1: EN-DC FR1 SS-SINR measurement accuracy supported test configurations

Test Case ID	Description
4.7.3.1-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.3.1-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.3.1-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.3.1-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.3.1-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.3.1-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.3.1.4.1-2.

Table 4.7.3.1.4.1-2: Initial conditions for SS-SINR intra frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.3.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the target cell for SS-SINR measurements. The connection setup is done according to the settings in clause C.1.1.

4.7.3.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 4.7.3.1.5-1 as appropriate.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit an RRCConnectionReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic MeasurementReport. The SS-SINR value of Cell 3 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 4.7.3.1.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 4.7.3.1.5-1 as appropriate and repeat steps 5-7.

4.7.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.3.1.4.3-1: Common Exception messages for EN-DC FR1 SS-SINR measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2
Specific message contents exceptions for Test Configuration 4.7.3.1-1 and 4.7.3.1-4	Table H.3.1-3 with Condition and SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.7.3.1-2 and 4.7.3.1-5	Table H.3.1-3 with Condition Synchronous cells and SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.7.3.1-3 and 4.7.3.1-6	Table H.3.1-3 with Condition Synchronous cells and SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.3.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for EN-DC FR1 SS-SINR Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

4.7.3.1.5 Test requirements

Table 4.7.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-SINR measurement report for each of the tests in Table 4.7.3.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.3.1.5-2

Table 4.7.3.1.5-1: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			

Parameter			Unit	Test 1		Test 2	
				Cell 2	Cell 3	Cell 2	Cell 3
Downlink dedicated BWP configuration				DLBWP.1.1			
Uplink initial BWP configuration				ULBWP.0.1			
Uplink dedicated BWP configuration				ULBWP.1.1			
DRX Cycle configuration			ms	Not Applicable			
TRS configuration		Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD	
		Config 2,5		TRS.1.1 TDD	-	TRS.1.1 TDD	-
		Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
		Config 2,5		SR.1.1 TDD		SR.1.1 TDD	
		Config 3,6		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	
		Config 2,5		CR.1.1 TDD		CR.1.1 TDD	
		Config 3,6		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
		Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD	
		Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
Time offset with Cell 2		Config 2,3,5,6	µs	-	3	-	3
		Config 1,4	ms	-	3	-	3
SMTC configuration		Config 1,4		SMTC.2			
		Config 2,3,5,6		SMTC.1			
SSB configuration		Config 1,2,4,5		SSB.1 FR1			
		Config 3,6		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15			
		Config 3,6		30			
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)			dB	0	0	0	0
N_{oc} Note2		Depending on band group	dBm/15kHz	-93		-116+ Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-93.2		Same as Noc for 15kHz	
	Config 3,6	Depending on band group		-90.2		-113+ Δ_{BG_offset}	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-3.5	-3.5
SS-RSRP Note3	Config 1,2,4,5	Depending on band group	dBm/SCS	-88.46	-90.34	-119.5+ Δ_{BG_offset}	-119.5+ Δ_{BG_offset}
	Config 3,6	Depending on band group		-85.65	-87.53	-116.5+ Δ_{BG_offset}	-116.5+ Δ_{BG_offset}
SS-SINR Note3			dB	0	-3.19	-5.1	-5.1
Io Note3	Config 1,2,4,5	Depending on band group	dBm/ 9.36MHz	-57.5		-85.28+ Δ_{BG_offset}	

Parameter			Unit	Test 1		Test 2	
				Cell 2	Cell 3	Cell 2	Cell 3
	Config 3,6	Depending on band group	dBm/ 38.16MHz	-51.59		-79.17+ Δ_{BG_offset}	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
NOTE 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
NOTE 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
NOTE 5: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2							
NOTE 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification							

Table 4.7.3.1.5-2: SS-SINR Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	SS-SINR_31	SS-SINR_28
Highest reported value (Cell 3)	SS-SINR_49	SS-SINR_45
Extreme Conditions		
Lowest reported value (Cell 3)	SS-SINR_30	SS-SINR_27
Highest reported value (Cell 3)	SS-SINR_50	SS-SINR_46

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.3.2 Inter-Frequency SS-SINR measurement accuracy

4.7.3.2.1 EN-DC FR1-FR1 SS-SINR absolute measurement accuracy

4.7.3.2.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-SINR absolute measurement accuracy is within the specified limits for all bands.

4.7.3.2.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards, which support ss-SINR-Meas.

4.7.3.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.3.2.1.

4.7.3.2.1.4 Test description

4.7.3.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.3.2.1.4.1-1.

Table 4.7.3.2.1.4.1-1: EN-DC FR1-FR1 SS-SINR measurement accuracy supported test configurations

Test Case ID	Description
4.7.3.2.1-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.3.2.1-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.3.2.1-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.3.2.1-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.3.2.1-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.3.2.1-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.3.2.1.4.1-2.

Table 4.7.3.2.1.4.1-2: Initial conditions for SS-SINR inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.3.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.3.2.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in two different FR1 frequencies. Cell 2 is the PSCell and Cell 3 is the target cell for SS-SINR measurements. The connection setup is done according to the settings in clause C.1.1.

4.7.3.2.1.4.2 Test procedure

Same as in clause 4.7.3.1.4.2 but replacing Table 4.7.3.1.5-1 and 4.7.3.1.5-2 with 4.7.3.2.1.5-1 and 4.7.3.2.1.5-2, respectively.

4.7.3.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.3.2.1.4.3-1: Common Exception messages for EN-DC FR1-FR1 SS-SINR absolute measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern#0
Specific message contents exceptions for Test Configuration 4.7.3.1.1.-1 and 4.7.3.1.1-4	Table H.3.1-3 with Conditions INTER-FREQ MO and SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.7.3.1.1-2 and 4.7.3.1.1-5	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells and SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.7.3.1.1-3 and 4.7.3.1.1-6	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells and SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.3.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for EN-DC FR1-FR1 SS-SINR Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

4.7.3.2.1.5 Test requirements

Table 4.7.3.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-SINR measurement report for each of the tests in Table 4.7.3.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.3.2.1.5-2.

Table 4.7.3.2.1.5-1: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1, 4		TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD	

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
		Config 2, 5		TRS.1.1 TDD	-	TRS.1.1 TDD	-	TRS.1.1 TDD	-
		Config 3, 6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
		Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
		Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
		Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
		Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
		Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
		Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns				OP.1					
SS-RSSI-Measurement				Not Applicable					
Time offset with Cell 2		Config 2,3,5,6	µs	-	3	-	3	-	3
		Config 1,4	ms	-	3	-	3	-	3
STMC configuration		Config 2,3,5,6		SMTC.1					
		Config 1,4		SMTC.2					
SSB configuration		Config 1,2,4,5		SSB.1 FR1					
		Config 3,6		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15					
		Config 3,6		30					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	Depending on band group	dBm/15kHz	-88	-88	-108.5	-108.5	-119.5+ Δ_{BG_offset}	-119.5+ Δ_{BG_offset}
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-88	-88	-108.5	-108.5	Same as Noc for 15kHz	Same as Noc for 15kHz
	Config 3,6	Depending on band group		-85	-85	-105.5	-105.5	-116.5+ Δ_{BG_offset}	116.5+ Δ_{BG_offset}
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	20	20	-3.2	-3.2
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	20	20	-3.2	-3.2
SS-RSRP Note3	Config 1,2,4,5	Depending on band group	dBm/SCS	-89.75	-89.75	-88.5	-88.5	-122.7+ Δ_{BG_offset}	-122.7+ Δ_{BG_offset}
	Config 3,6	Depending on band group		-86.75	-86.75	-85.5	-85.5	-119.7+ Δ_{BG_offset}	-119.7+ Δ_{BG_offset}
SS-SINR Note3			dB	-1.75	-1.75	20	20	-3.2	-3.2
Io Note3	Config 1,2,4,5	Depending on band group	dBm/ 9.36MHz	-57.83	-57.83	-60.5	-60.5	-89.85+ Δ_{BG_offset}	-89.85+ Δ_{BG_offset}
	Config 3,6	Depending on band group	dBm/ 38.16MHz	-51.73	-51.73	-54.41	-54.41	-83.75+ Δ_{BG_offset}	-83.75+ Δ_{BG_offset}
Propagation condition			-	AWGN					
Antenna configuration			-	1x2					

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
NOTE 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
NOTE 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
NOTE 5: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.							
NOTE 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.							

Table 4.7.3.2.1.5-2: SS-SINR Inter frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	SS-SINR_35	SS-SINR_79	SS-SINR_32
Highest reported value (Cell 3)	SS-SINR_51	SS-SINR_94	SS-SINR_49
Extreme Conditions			
Lowest reported value (Cell 3)	SS-SINR_33	SS-SINR_77	SS-SINR_31
Highest reported value (Cell 3)	SS-SINR_53	SS-SINR_96	SS-SINR_50

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.3.2.2 EN-DC FR1-FR1 SS-SINR relative measurement accuracy

4.7.3.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-SINR relative measurement accuracy is within the specified limits for all bands.

4.7.3.2.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards, which support ss-SINR-Meas.

4.7.3.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.3.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.3.2.2.

4.7.3.2.2.4 Test description

4.7.3.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.3.2.2.4.1-1.

Table 4.7.3.2.2.4.1-1: EN-DC FR1-FR1 SS-SINR measurement accuracy supported test configurations

Test Case ID	Description
4.7.3.2.2-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.3.2.2-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.3.2.2-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.3.2.2-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD

4.7.3.2.2-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.3.2.2-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.3.2.2.4.1-2.

Table 4.7.3.2.2.4.1-2: Initial conditions for SS-SINR inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.3.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.3.2.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in two different FR1 frequencies. Cell 2 is the PSCell and Cell 3 is the target cell for SS-SINR measurements. The connection setup is done according to the settings in clause C.1.1.

4.7.3.2.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 4.7.3.2.2.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic MeasurementReport. The SS-SINR value of Cell 3 reported by the UE is compared to the SS-SINR value of Cell 2 reported by the UE. If the difference between both values is outside the limits in Table 4.7.3.2.2.5-2 or the UE fails to report the measurement value for Cell 3 or Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 4.7.3.2.2.5-1 as appropriate and repeat steps 5-7.

4.7.3.2.2.4.3 Message contents

Message contents are same as in clause 4.7.3.2.1.4.3.

4.7.3.2.2.5 Test requirements

Table 4.7.3.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-SINR measurement report for each of the tests in Table 4.7.3.2.2.5-1 shall meet the corresponding relative accuracy requirements in Table 4.7.3.2.2.5-2

Table 4.7.3.2.2.5-1: same as Table 4.7.3.2.1.5-1

Table 4.7.3.2.2.5-2: SS-SINR Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	SS-SINR_x - 10	SS-SINR_x - 10	SS-SINR_x - 11
Highest reported value (Cell 3)	SS-SINR_x + 10	SS-SINR_x + 10	SS-SINR_x + 11
Extreme Conditions			
Lowest reported value (Cell 3)	SS-SINR_x - 11	SS-SINR_x - 11	SS-SINR_x - 11
Highest reported value (Cell 3)	SS-SINR_x + 11	SS-SINR_x + 11	SS-SINR_x + 11
SS-SINR_x is the reported value of Cell 2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.4 L1-RSRP

4.7.4.0 Minimum conformance requirements

4.7.4.0.1 SSB based absolute L1-RSRP measurement accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 4.7.4.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 of TS 38.133 [6] for a corresponding Band for each relevant SSB.

Table 4.7.4.0.1-1: SSB based L1-RSRP absolute accuracy in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot**	**Io [Note 1] range**				
			NR operating band groups [Note 2]	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±5.0	±9.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70

			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±8.5	±11.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H,	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3A.4.							

The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.4.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 4.7.4.0.1-2: SS-RSRP and CSI-RSRP measurement report mapping

Reported value	Measured quantity value (L3 SS-RSRP and CSI-RSRP)	Measured quantity value (L1 SS-RSRP and CSI-RSRP)	Unit
RSRP_0	RSRP<-156	Not valid	dBm
RSRP_1	-156≤RSRP<-155	Not valid	dBm
RSRP_2	-155≤RSRP<-154	Not valid	dBm
RSRP_3	-154≤RSRP<-153	Not valid	dBm
RSRP_4	-153≤RSRP<-152	Not valid	dBm
RSRP_5	-152≤RSRP<-151	Not valid	dBm
RSRP_6	-151≤RSRP<-150	Not valid	dBm
RSRP_7	-150≤RSRP<-149	Not valid	dBm
RSRP_8	-149≤RSRP<-148	Not valid	dBm
RSRP_9	-148≤RSRP<-147	Not valid	dBm
RSRP_10	-147≤RSRP<-146	Not valid	dBm
RSRP_11	-146≤RSRP<-145	Not valid	dBm
RSRP_12	-145≤RSRP<-144	Not valid	dBm
RSRP_13	-144≤RSRP<-143	Not valid	dBm
RSRP_14	-143≤RSRP<-142	Not valid	dBm
RSRP_15	-142≤RSRP<-141	Not valid	dBm
RSRP_16	-141≤RSRP<-140	RSRP<-140	dBm
RSRP_17	-140≤RSRP<-139	-140≤RSRP<-139	dBm
RSRP_18	-139≤RSRP<-138	-139≤ RSRP<-138	dBm
…	…		…
RSRP_111	-46≤RSRP<-45	-46≤ RSRP<-45	dBm
RSRP_112	-45≤RSRP<-44	-45≤ RSRP<-44	dBm
RSRP_113	-44≤RSRP<-43	-44≤ RSRP	dBm
RSRP_114	-43≤RSRP<-42	Not valid	dBm
RSRP_115	-42≤RSRP<-41	Not valid	dBm
RSRP_116	-41≤RSRP<-40	Not valid	dBm
RSRP_117	-40≤RSRP<-39	Not valid	dBm
RSRP_118	-39≤RSRP<-38	Not valid	dBm

RSRP_119	-38≤RSRP<-37	Not valid	dBm
RSRP_120	-37≤RSRP<-36	Not valid	dBm
RSRP_121	-36≤RSRP<-35	Not valid	dBm
RSRP_122	-35≤RSRP<-34	Not valid	dBm
RSRP_123	-34≤ RSRP<-33	Not valid	dBm
RSRP_124	-33≤RSRP<-32	Not valid	dBm
RSRP_125	-32≤RSRP<-31	Not valid	dBm
RSRP_126	-31≤RSRP	Not valid	dBm
RSRP_127 (Note)	Infinity	Infinity	dBm
Note: The value of RSRP_127 is applicable for RSRP threshold configured by the network as defined in TS 38.331 [13], but not for the purpose of measurement reporting.			

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.19.1.1 and 10.1.6.

4.7.4.0.2 SSB based relative L1-RSRP measurement accuracy requirements

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the serving cell.

The accuracy requirements in Table 4.7.4.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 of TS 38.133 [6] for a corresponding Band for each relevant SSB.

Table 4.7.4.0.2-1: SSB based L1-RSRP relative accuracy in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 2	**Io** Note 1 **range**				
			NR operating band groups Note 4	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of SSBs to which the requirement applies. NOTE 3: Void NOTE 4: NR operating band groups in FR1 are as defined in clause 3A.4.							

The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.4.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.19.1.2 and 10.1.6.

4.7.4.0.3 CSI-RS based absolute L1-RSRP measurement accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-RSRP in this clause apply to all CSI-RS resources of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 4.7.4.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 of TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.4.0.3-1.

Table 4.7.4.0.3-1: CSI-RS based L1-RSRP absolute accuracy in FR1

Accuracy		**Conditions**						
Normal condition	**Extreme condition**	**CSI-RS Ês/Iot**	**Io [Note 1] range**					
			NR operating band groups [Note 2]	**Minimum Io**				**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{CSI-RS}**			**$dBm/BW_{Channel}$**	**$dBm/BW_{Channel}$**
				SCS_{CSI-RS} = 15 kHz	**SCS_{CSI-RS} = 30 kHz**	**SCS_{CSI-RS} = 60 kHz**		
±5.0	±9.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±8.5	±11.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3A.4.								

The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.4.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.19.2.1 and 10.1.6.

4.7.4.0.4 CSI-RS based relative L1-RSRP measurement accuracy requirements

The relative accuracy of CSI-RS based L1-RSRP is defined as the L1-RSRP measured from one CSI-RS compared to the largest measured value of L1-RSRP among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 4.7.4.0.4-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 of TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.4.0.4-1.

Table 4.7.4.0.4-1: CSI-RS based L1-RSRP relative accuracy in FR1

Accuracy		**Conditions**						
Normal condition	**Extreme condition**	**CSI-RS Ês/Iot** Note 2	**Io** Note 1 **range**					
			NR operating band groups Note 4	**Minimum Io**				**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{CSI-RS}**			**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{CSI-RS} = 15 kHz	**SCS_{CSI-RS} = 30 kHz**	**SCS_{CSI-RS} = 60 kHz**		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: Void
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.4.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.19.2.2 and 10.1.6.

4.7.4.1 SSB based L1-RSRP measurements

4.7.4.1.1 EN-DC FR1 SSB-based L1-RSRP absolute measurement accuracy

4.7.4.1.1.1 Test purpose

The purpose of this test is to verify that the SSB based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

4.7.4.1.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.7.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.4.1.

4.7.4.1.1.4 Test description

4.7.4.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.4.1.1.4.1-1.

Table 4.7.4.1.1.4.1-1: EN-DC FR1 SSB based L1-RSRP absolute measurement accuracy supported test configurations

Test Case ID	Description
4.7.4.1.1-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.4.1.1-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.4.1.1-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.4.1.1-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.4.1.1-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.4.1.1-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.4.1.1.4.1-2.

Table 4.7.4.1.1.4.1-2: Initial conditions for SSB based L1-RSRP absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.4.1.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell. Cell 2 is the PSCell and the target for SSB-based L1-RSRP measurements. The UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The connection setup is done according to the settings in clause C.1.1.

4.7.4.1.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 4.7.4.1.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 4.7.4.1.1.4.1-2.
2. Set the parameters according to T1 in Table 4.7.4.1.1.5-1.
3. The UE shall start sending L1-RSRP report including results of both SSB#0 and SSB#1 every 80 slots.
4. The SS shall check the L1-RSRP reported values of SSB#0 or SSB#1 in the periodic L1-RSRP reports. If the value for the strongest SSB is within the limits in Table 4.7.4.1.1.5-2 or Table 4.7.4.1.1.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.
5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
6. Set the parameters according to each sub-test in Table 4.7.4.1.1.5-1 as appropriate and repeat steps 3-5.

4.7.4.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.4.1.1.4.3-1: Common Exception messages EN-DC SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with conditions SSB and PERIODICTable H.3.6-10 Table H.3.4-1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1 Table H.3.5-8

Table 4.7.4.1.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

4.7.4.1.1.5 Test requirement

Table 4.7.4.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 4.7.4.1.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.4.1.1.5-2 for test configurations 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 4.7.4.1.1.5-3 for test configurations 3 and 6.

Table 4.7.4.1.1.5-1: L1-RSRP test parameters

Parameter		Config	Unit	Test 1	Test 2
SSB GSCN		1~6		freq1	freq1
Duplex mode		1,4		FDD	FDD
		2,5		TDD	TDD
		3,6		TDD	TDD
TDD Configuration		1,4		N/A	N/A
		2,5		TDDConf.1.1	TDDConf.1.1
		3,6		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$		1,4	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
		2,5		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
		3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel		1,4		SR.1.1 FDD	SR.1.1 FDD
		2,5		SR.1.1 TDD	SR.1.1 TDD
		3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel		1,4		CR.1.1 FDD	CR.1.1 FDD
		2,5		CR.1.1 TDD	CR.1.1 TDD
		3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel		1,4		CCR.1.1 FDD	CCR.1.1 FDD
		2,5		CCR.1.1 TDD	CCR.1.1 TDD
		3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration		1,4		SSB.3 FR1	SSB.3 FR1
		2,5		SSB.3 FR1	SSB.3 FR1
		3,6		SSB.4 FR1	SSB.4 FR1
OCNG Patterns		1~6		OP.1	OP.1
TRS configuration		1,4		TRS.1.1 FDD	TRS.1.1 FDD
		2,5		TRS.1.1 TDD	TRS.1.1 TDD
		3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~6		SMTC.1	SMTC.1
reportConfigType		1~6		periodic	periodic
reportQuantity		1~6		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS		1~6		2	2
L1-RSRP reporting period		1~6		slot80	slot80
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1		1~6	dB	0	0
N_{oc} Note2	Depending on band group	1,2,4,5	dBm/15kHz	-94.65	-117+ Δ_{BG_offset}
		3,6		-96.00	117+ Δ_{BG_offset}
N_{oc} Note2	Depending on band group	1,2,4,5	dBm/SSB SCS	-94.65	-117+ Δ_{BG_offset}
		3,6		-93.00	-114+ Δ_{BG_offset}
$\hat{E}_s / I_{ot}$		1~6	dB	10	-2.2
SSB RSRP Note3	Depending on band group	1,2,4,5	dBm/SSB SCS	-84.65	-119.2 + Δ_{BG_offset}
		3,6		-83.00	-116.2 +

Parameter		Config	Unit	Test 1	Test 2
					Δ_{BG_offset}
Io Note3	Depending on band group	1,2,4,5	dBm/9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
		3,6	dBm/38.16 MHz	-51.53	-80.90 + Δ_{BG_offset}
$\hat{E}_s / N_{oc}$		1~6	dB	10	-2.2
Propagation condition		1~6		AWGN	AWGN
Antenna configuration		1~6		1x2	1x2

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 4.7.4.1.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	62	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	31
		Bands NR_FDD_FR1_B	31
		Bands NR_TDD_FR1_C	32
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	32
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	33
		Bands NR_FDD_FR1_F	33
		Bands NR_FDD_FR1_G	34
		Bands NR_FDD_FR1_H	34
Highest reported value (Cell 2)	82	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	44
		Bands NR_FDD_FR1_B	45
		Bands NR_TDD_FR1_C	45
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	46
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	46
		Bands NR_FDD_FR1_F	47
		Bands NR_FDD_FR1_G	47
		Bands NR_FDD_FR1_H	48
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	59	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	26
		Bands NR_FDD_FR1_B	27
		Bands NR_TDD_FR1_C	27
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	28
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	28

		Bands NR_FDD_FR1_F	29
		Bands NR_FDD_FR1_G	29
		Bands NR_FDD_FR1_H	30
Highest reported value (Cell 2)	85	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	49
		Bands NR_FDD_FR1_B	49
		Bands NR_TDD_FR1_C	50
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	50
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	51
		Bands NR_FDD_FR1_F	51
		Bands NR_FDD_FR1_G	52
		Bands NR_FDD_FR1_H	52
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 4.7.4.1.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	e63	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	34
		Bands NR_FDD_FR1_B	34
		Bands NR_TDD_FR1_C	35
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	35
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	36
		Bands NR_FDD_FR1_F	36
		Bands NR_FDD_FR1_G	37
		Bands NR_FDD_FR1_H	37
Highest reported value (Cell 2)	84	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	47
		Bands NR_FDD_FR1_B	48
		Bands NR_TDD_FR1_C	48
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	49
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	49
		Bands NR_FDD_FR1_F	50
		Bands NR_FDD_FR1_G	50
		Bands NR_FDD_FR1_H	51
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	60	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	29
		Bands NR_FDD_FR1_B	30
		Bands NR_TDD_FR1_C	30
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	31
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	31
		Bands NR_FDD_FR1_F	32
		Bands NR_FDD_FR1_G	32
		Bands NR_FDD_FR1_H	33
Highest reported value (Cell 2)	87	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	52
		Bands NR_FDD_FR1_B	52
		Bands NR_TDD_FR1_C	53
		Bands NR_FDD_FR1_D,	53

		NR_TDD_FR1_D	
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	54
		Bands NR_FDD_FR1_F	54
		Bands NR_FDD_FR1_G	55
		Bands NR_FDD_FR1_H	55
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.4.1.2 EN-DC FR1 SSB-based L1-RSRP relative measurement accuracy

4.7.4.1.2.1 Test purpose

The purpose of this test is to verify that the SSB based L1-RSRP relative measurement accuracy is within the specified limits for all bands.

4.7.4.1.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.7.4.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.4.1.

4.7.4.1.2.4 Test description

4.7.4.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.4.1.2.4.1-1.

Table 4.7.4.1.2.4.1-1: EN-DC FR1 SSB based L1-RSRP relative measurement accuracy supported test configurations

Test Case ID	Description
4.7.4.1.2-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.4.1.2-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.4.1.2-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.4.1.2-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.4.1.2-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.4.1.2-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 4.7.4.1.2.4.1-2.

Table 4.7.4.1.2.4.1-2: Initial conditions for SSB based L1-RSRP relative accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.4.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	

	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.4.1.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell. Cell 2 is the PSCell and the target for SSB-based L1-RSRP measurements. The UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The connection setup is done according to the settings in clause C.1.1.

4.7.4.1.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 4.7.4.1.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 4.7.4.1.2.4.1-2.
2. Set the parameters according to T1 in Table 4.7.4.1.2.5-1.
3. The UE shall start sending L1-RSRP report including results of both SSB#0 and SSB#1 every 80 slots.
4. The SS shall check the L1-RSRP reported values of SSB#0 and SSB#1 in the periodic L1-RSRP reports. The DIFF-RSRP value of SSB#0 or SSB#1 reported by the UE is compared to the expected DIFF-RSRP. If the DIFF-RSRP value is within the limits in Table 4.7.4.1.2.5-2, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.
5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
6. Set the parameters according to each sub-test in Table 4.7.4.1.2.5-1 as appropriate and repeat steps 3-5.

4.7.4.1.2.4.3 Message contents

Message contents are same as in Clause 4.7.4.1.1.4.3.

4.7.4.1.2.5 Test requirement

Table 4.7.4.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 4.7.4.1.2.5-1 shall meet the corresponding relative accuracy requirements in Table 4.7.4.1.2.5-2.

Table 4.7.4.1.2.5-1: Same as Table 4.7.4.1.1.5-1

Table 4.7.4.1.2.5-2: L1-RSRP relative accuracy requirements for the reported values

	Test 1	**Test 2**
	All bands	All bands
Normal Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2
Extreme Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported	2	2

value		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.4.2 CSI-RS based L1-RSRP measurements

4.7.4.2.1 EN-DC FR1 CSI-RS-based L1-RSRP absolute measurement accuracy

4.7.4.2.1.1 Test purpose

The purpose of this test is to verify that the CSI-RS based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

4.7.4.2.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.7.4.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.4.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.4.2.

4.7.4.2.1.4 Test description

4.7.4.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.4.2.1.4.1-1.

Table 4.7.4.2.1.4.1-1: EN-DC FR1 CSI-RS based L1-RSRP absolute measurement accuracy supported test configurations

Test Case ID	Description
4.7.4.2.1-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.4.2.1-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.4.2.1-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.4.2.1-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.4.2.1-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.4.2.1-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.4.2.1.4.1-2.

Table 4.7.4.2.1.4.1-2: Initial conditions for CSI-RS based L1-RSRP absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.4.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to	N/A		

Parameter	Value	Comment
connection diagram		

1. Message contents are defined in clause 4.7.4.2.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell. Cell 2 is the PSCell and the target for CSI-RS-based L1-RSRP measurements. Before the test, UE is configured to perform RLM and BFD measurement based on the SSBs. The connection setup is done according to the settings in clause C.1.1.

4.7.4.2.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 4.7.4.2.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 4.7.4.2.1.4.1-2.
2. Set the parameters according to T1 in Table 4.7.4.2.1.5-1.
3. The UE shall start sending L1-RSRP report including results of both CSI-RS#0 and CSI-RS #1 every 80 slots.
4. The SS shall check the L1-RSRP reported values of CSI-RS #0 or CSI-RS #1 in the periodic L1-RSRP reports. If the value for the strongest CSI-RS is within the limits in Table 4.7.4.2.1.5-2 or Table 4.7.4.2.1.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.
5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
6. Set the parameters according to each sub-test in Table 4.7.4.2.1.5-1 as appropriate and repeat steps 3-5.

4.7.4.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.4.2.1.4.3-1: Common Exception messages EN-DC CSI-RS-based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and CSI-RSRP Table H.3.6-3 with conditions CSI-RS and PERIODIC Table H.3.4-1 Table H.3.5-8 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.4.2.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the	

		SSB.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

4.7.4.2.1.5 Test requirement

Table 4.7.4.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 4.7.4.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.4.2.1.5-2 for test configurations 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 4.7.4.2.1.5-3 for test configurations 3 and 6.

Table 4.7.4.2.1.5-1: L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1	SSB.3 FR1
	2,5		SSB.3 FR1	SSB.3 FR1
	3,6		SSB.4 FR1	SSB.4 FR1
OCNG Patterns	1~6		OP.1	OP.1
TRS configuration	1,4		TRS.1.1 FDD	TRS.1.1 FDD
	2,5		TRS.1.1 TDD	TRS.1.1 TDD
	3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1	SMTC.1
CSI-RS	1,4		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
	2,5		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
	3,6		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType	1~6		periodic	periodic
reportQuantity	1~6		cri-RSRP	cri-RSRP
Number of reported RS	1~6		2	2
L1-RSRP reporting period	1~6		slot80	slot80
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS	1~6	dB	0	0

Parameter		Config	Unit	Test 1	Test 2
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	Depending on band group	1,2,4,5	dBm/15kHz	-94.65	-117+ Δ_{BG_offset}
		3,6		-96.00	117+ Δ_{BG_offset}
N_{oc} Note2		1,2,4,5	dBm/CSI-RS SCS	-94.65	-117+ Δ_{BG_offset}
		3,6		-93.00	-114+ Δ_{BG_offset}
$\hat{E}_s / I_{ot}$		1~6	dB	10	-2.2
CSI-RSRP Note3	Depending on band group	1,2,4,5	dBm/CSI-RS SCS	-84.65	-119.2 + Δ_{BG_offset}
		3,6		-83.00	-116.2 + Δ_{BG_offset}
Io Note3	Depending on band group	1,2,4,5	dBm/9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
		3,6	dBm/38.16 MHz	-51.53	-80.90 + Δ_{BG_offset}
$\hat{E}_s / N_{oc}$		1~6	dB	10	-2.2
Propagation condition		1~6		AWGN	AWGN
Antenna configuration		1~6		1x2	1x2

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 4.7.4.2.1.5-2: Same as Table 4.7.4.1.1.5-2

Table 4.7.4.2.1.5-3: Same as Table 4.7.4.1.1.5-3

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.4.2.2 EN-DC FR1 CSI-RS-based L1-RSRP relative measurement accuracy

4.7.4.2.2.1 Test purpose

The purpose of this test is to verify that the CSI-RS based L1-RSRP relative measurement accuracy is within the specified limits for all bands.

4.7.4.2.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

4.7.4.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.4.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.4.2.

4.7.4.2.2.4 Test description

4.7.4.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.4.2.2.4.1-1.

Table 4.7.4.2.2.4.1-1: EN-DC FR1 CSI-RS based L1-RSRP relative measurement accuracy supported test configurations

Test Case ID	Description
4.7.4.2.2-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.4.2.2-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.4.2.2-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.4.2.2-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.4.2.2-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.4.2.2-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.4.2.2.4.1-2.

Table 4.7.4.2.2.4.1-2: Initial conditions for CSI-RS based L1-RSRP relative accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.4.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.4.2.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell. Cell 2 is the PSCell and the target for CSI-RS-based L1-RSRP measurements. Before the test, UE is configured to perform RLM and BFD measurement based on the SSBs. The connection setup is done according to the settings in clause C.1.1.

4.7.4.2.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 4.7.4.2.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 4.7.4.2.2.4.1-2.

2. Set the parameters according to T1 in Table 4.7.4.2.2.5-1.

3. The UE shall start sending L1-RSRP report including results of both CSI-RS#0 and CSI-RS #1 every 80 slots.
4. The SS shall check the L1-RSRP reported values of CSI-RS #0 and CSI-RS #1 in the periodic L1-RSRP reports. The DIFF-RSRP value of CSI-RS#0 or CSI-RS#1 reported by the UE is compared to the expected DIFF-RSRP. If the DIFF-RSRP value is within the limits in Table 4.7.4.2.2.5-2, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.
5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
6. Set the parameters according to each sub-test in Table 4.7.4.2.2.5-1 as appropriate and repeat steps 3-5.

4.7.4.2.2.4.3 Message contents

Message contents are same as in Clause 4.7.4.2.1.4.3.

4.7.4.2.2.5 Test requirement

Table 4.7.4.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 4.7.4.2.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.4.2.2.5-2.

Table 4.7.4.2.2.5-1: Same as Table 4.7.4.2.1.5-1

Table 4.7.4.2.2.5-2: Same as Table 4.7.4.1.2.5-2

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.5 SFTD

4.7.5.0 Minimum conformance requirements

4.7.5.0.1 SFTD Accuracy Requirement

The SFN and frame timing difference (SFTD) is measured between PCell and NR PSCell under EN-DC, or between PCell and NR cell for inter-RAT SFTD. The inter-RAT SFTD measurement can only be configured for E-UTRA - NR band combinations that are supported by the UE.

The accuracy requirements in Table 4.7.5.0.1-3 are applicable under the following conditions:

For PCell SFN and frame timing measurement:

- Cell specific reference signals are transmitted either from one, two or four antenna ports.
- Conditions defined in TS 36.101 [27] clause 7.3 for reference sensitivity are fulfilled.
- No changes to the uplink transmission timing are applied during the measurement period.
- $RSRP|_{dBm}$ according to Annex B.3.5 of TS 36.133 [23] for a corresponding Band.
- Io range defined in Table 4.7.5.0.1-1.

Table 4.7.5.0.1-1: PCell Io range conditions for SFTD measurement accuracy

Parameter	Io Note 1 range		
	E-UTRA operating band groups Note 4, 5	Minimum Io	Maximum Io
		dBm/15kHz Note 2, 3	$dBm/BW_{Channel}$
Conditions	FDD_A, TDD_A	-121	-50
	FDD_C, TDD_C	-120	-50

	FDD_D	-119.5	-50
	FDD_E, TDD_E	-119	-50
	FDD_F	-118.5	-50
	FDD_G	-118	-50
	FDD_H	-117.5	-50
	FDD_N	-114.5	-50

NOTE 1: When in dBm/15kHz, the minimum Io condition is expressed as the average Io per RE over all REs in that symbol. Io may be different in different symbols within a subframe.
NOTE 2: The condition level is increased by Δ>0, when applicable, as described in clause B.4.2 and B.4.3 of TS 36.133 [23].
NOTE 3: The condition level is increased by MSD as defined in clause 7.3B in TS 38.101-3 [4], if applicable depending on E-UTRA - NR band combination.
NOTE 4: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [23].
NOTE 5: Only E-UTRA bands within EN-DC band combinations as specified in clause 5.5B in TS 38.101-3 [4] are applicable.

For NR PSCell, or NR cell SFN and frame timing measurement in FR1:

- Conditions defined in TS 38.101-1 [2] clause 7.3 for reference sensitivity are fulfilled.
- Io range defined in Table 4.7.5.0.1-2.

Table 4.7.5.0.1-2: NR PSCell, or NR cell Io range conditions for SFTD measurement accuracy in FR1

Parameter	**Io Note 1 range**			
	NR operating band groups Note 4, 5	**Minimum Io** Note 2, 3		**Maximum Io**
		dBm/ SCS_{SSB}		
		SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**	**dBm/$BW_{Channel}$**
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-121	-118	-50
	NR_FDD_FR1_B	-120.5	-117.5	-50
	NR_TDD_FR1_C	-120	-117	-50
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-50
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-50
	NR_FDD_FR1_G	-118	-115	-50
	NR_FDD_FR1_H	-117.5	-114.5	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The condition level is increased by $\Delta R_{IB,c}$ as defined in clause 7.3B in TS 38.101-3 [4], depending on E-UTRA - NR band combination.
NOTE 3: The condition level is increased by MSD as defined in clause 7.3B in TS 38.101-3 [4], if applicable depending on E-UTRA - NR band combination.
NOTE 4: NR operating band groups are as defined in clause 3.5 of TS 36.133 [23].
NOTE 5: Only NR bands within EN-DC band combinations as specified in clause 5.5B in TS 38.101-3 [4] are applicable.

Table 4.7.5.0.1-3: SFTD measurement accuracy

Accuracy	**Conditions**	
	Ês/Iot	**Frequency range**
Ts Note 1	**dB**	
40	≥ -3 dB	FR1
40		FR2

NOTE 1: Ts is the basic timing unit defined in TS 36.211 [24].
NOTE 2: The parameter Ês/Iot is the minimum Ês/Iot of the pair of cells to which the requirement applies.

4.7.5.1 EN-DC FR1 SFTD measurement accuracy

4.7.5.1.1 Test purpose

The purpose of this test is to verify that SFTD measurement accuracy is within the specified limits for all bands.

4.7.5.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards. Applicability requires support of SFTD measurements between an E-UTRA PCell and an NR PSCell.

4.7.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.5.1.

4.7.5.1.4 Test description

4.7.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.5.1.4.1-1.

Table 4.7.5.1.4.1-1: Test configurations

Test Case ID	Description
4.7.5.1-1	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.5.1-2	LTE FDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.5.1-3	LTE FDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
4.7.5.1-4	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
4.7.5.1-5	LTE TDD, NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
4.7.5.1-6	LTE TDD, NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.5.1.4.1-2.

Table 4.7.5.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.5.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell. Cell 2 is the PSCell. The connection setup is done according to the settings in clause C.1.1.

3. The SFTD between PCell and PSCell shall be set to one of the conditions in Table 4.7.5.1.5-2. For negative Frame boundary offset, it can be achieved delaying PSCell in regards to PCell OR advancing PCell in regards to

PSCell. For positive Frame boundary offset, it can be achieved delaying PCell in regards to PSCell OR advancing PSCell in regards to PCell.

4.7.5.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On,* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 4.7.5.1.5-1 and Table 4.7.5.1.5-2 as appropriate. (Condition = 3)
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit a MeasurementReport containing the MeasResultCellListSFTD-r15 for the PSCell with SFTD measurements.
6. The SS shall check the reported SFN offset and frame boundary offset between the E-UTRA PCell and the NR PSCell. The number of failed iterations is increased by one if

   - The value of *sfn-OffsetResult* is different with the expected SFN offset value, or
   - The value of *frameBoundaryOffsetResult* is outside the range given in Table 4.7.5.1.5-3, or
   - The UE fails to report the measurement value for Cell 2.

   Otherwise the number of successful iterations is increased by one.
7. Switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On,* according to TS 38.508-1 [14] clause 4.5.
8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4.7.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.5.1.4.3-1: Common exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-4 with Condition INTER_RAT, GAPLESS and SFTD Table H.3.4-7 with Condition Inter-RAT and SFTD
Specific message contents exceptions for Test Configuration 4.7.5.1.-1, 4.7.5.1-2, 4.7.5.1-4 and 4.7.5.1-54	Table H.3.4-6 with Condition SSB.1 FR1 and SMTC.1
Specific message contents exceptions for Test Configuration 4.7.5.1-3 and 4.7.5.1-6	Table H.3.4-6 with Condition S SB.2 FR1 and SMTC.1

Table 4.7.5.1.4.3-2: ReportConfigInterRAT-SFTD

Derivation Path: TS 36.508 [25], Table 4.6.6-8B			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT ::= SEQUENCE {			
reportQuantityCellNR-r15 ::= SEQUENCE {			
ss-rsrp	true		
}			
reportSFTD-Meas-r15	pSCell		
}			

4.7.5.1.5 Test requirement

Table 4.7.5.1.5-1 defines the primary level settings including test tolerances.

Table 4.7.5.1.5-1: Test parameters for SFTD accuracy

Parameter	Config	Unit	Test 1
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
RMC CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1
	2,5		SSB.1 FR1
	3,6		SSB.2 FR1
SMTC configuration	1~6		SMTC.1
DL BWP configuration	1~6		DLBWP.1.1
UL BWP configuration	1~6		ULBWP.1.1
CSI-RS for tracking	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
OCNG Patterns	1~6		OP.1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2	1~6	dBm/15kHz	-104
N_{oc} Note2	1,2,4,5	dBm/SSB SCS	-104
	3,6		-101
$\hat{E}_s / I_{ot}$	1~6	dB	-2.7
$\hat{E}_s / N_{oc}$	1~6	dB	-2.7
SS-RSRP Note3	1,2,4,5	dBm/SCS	-106.7
	3,6		-103.7
Io Note3	1,2,4,5	dBm/9.36 MHz	-74.18
	3,6	dBm/38.16 MHz	-68.08
Propagation condition	1~6		AWGN

Parameter	Config	Unit	Test 1
Antenna configuration	1~6		1x2
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
NOTE 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification			

The SFTD reported by the UE consists of two elements, the SFN offset and the frame boundary offset between PCell and PSCell. Table 4.7.5.1.5-2 defines the timing offsets for the SFTD accuracy test. The SFN offset in reported SFTD shall match the values in Table 4.7.5.1.5-2 and the frame boundary offset in reported SFTD shall be within the range given in Table 4.7.5.1.5-3.

Table 4.7.5.1.5-2: Timing offsets for SFTD accuracy test

Condition	SFN offset between PCell and PSCell	Frame boundary offset between PCell and PSCell (Ts)
1	100	-122000
2	300	-60540
3	500	1000
4	700	62540
5	900	124000

Table 4.7.5.1.5-3: EN-DC FR1 SFTD measurement accuracy requirements for the value of frameBoundaryOffsetResult in reported SFTD

Normal and Extreme Conditions	frameBoundaryOffsetResult				
	Condition 1	Condition 2	Condition 3	Condition 4	Condition 5
Lowest reported value	-24408	-12116	192	12500	24792
Highest reported value	-24392	-12100	208	12516	24808

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.6 CLI measurements

4.7.6.0 Minimum conformance requirements

4.7.6.0.1 Minimum conformance requirements for SRS-RSRP accuracy

The SRS-RSRP measurement reported by the UE shall fulfil the accuracy requirements defined in Table 4.7.6.0.1-1 for FR1, provided that the following conditions are met. The accuracy requirements in this clause are derived based on AWGN radio propagation conditions.

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for SRS-RSRP measurements are fulfilled according to 38.133 [6] Annex B.2.7 for a corresponding Band for each relevant SRS resource configured for measurement.
- The time difference between UE's DL reference timing in the serving cell and SRS arrival time is no larger than $T_{error_SRS_RSRP}$, where:

- $T_{error_SRS_RSRP} = T_C \times N_{TA_offset}$ + 4.67us for FR1
- N_{TA_offset} is defined in 38.133 [6] Table 7.1.2-2
- T_C is 0.509ns

- The number of SRS ports in the SRS resource configured for measurement is 1,
- The number of symbols in the SRS resource configured for measurement is 1,
- The number of repetitions in the SRS resource configured for measurement is 1,
- Frequency hopping, sequence group hopping, or sequence hopping is disabled in the SRS resource configured for measurement,
- The bandwidth of the SRS resource is 48 PRBs.
- One of the following conditions is met
  - There is no other SRS resource with the same root sequence and on the same symbol and with same comb as the relevant SRS resource.
  - If multiple SRS resources are on the same symbol and with same comb, the distance between cyclic shifts of any two resources is no less than 6 if transmissionComb = n4, and no less than 4 if transmissionComb = n2.

Table 4.7.6.0.1-1: SRS-RSRP absolute accuracy in FR1

Accuracy						Conditions						
Normal condition			Extreme condition			SRS Ês/Iot	Io Note 1 range					
							NR operating band groups Note 2	Minimum Io				Maximum Io
dB						dB		dBm / SCS_{SRS}			dBm/BW Channel	dBm/BW Channel
SCS_{SRS} (kHz)			SCS_{SRS} (kHz)									
15	30	60	15	30	60			SCS_{SRS} = 15 kHz	SCS_{SRS} = 30 kHz	SCS_{SRS} = 60 kHz		
±3	±3.5	±5	±7.5	±8	±9.5	≥1	NR_TDD_FR1_A,	-120	-117	-114	N/A	-70
							NR_TDD_FR1_C	-119	-116	-113	N/A	-70
							NR_TDD_FR1_D	-118.5	-115.5	-112.5	N/A	-70
							NR_TDD_FR1_E	-118	-115	-112	N/A	-70
±6.5	±7	±8.5	±9.5	±10	±11.5	≥1	NR_TDD_FR1_A, NR_TDD_FR1_C, NR_TDD_FR1_D, NR_TDD_FR1_E	N/A	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in 38.133 [6] clause 3.5.2.

The normative reference for this requirement is TS 38.133 [6] clause 10.1.22.1.1

4.7.6.0.1.1 SRS-RSRP report mapping

The reporting range of SRS-RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution. The mapping of measured quantity is defined in Table 4.7.6.0.1.2-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 4.7.6.0.1.2-1: SRS-RSRP measurement report mapping

Reported value	Measured quantity value	Unit
SRS-RSRP_0	SRS-RSRP<-140	dBm
SRS-RSRP_1	-140≤ SRS-RSRP<-139	dBm
SRS-RSRP_2	-139≤ SRS-RSRP<-138	dBm
SRS-RSRP_3	-138≤ SRS-RSRP<-137	dBm
SRS-RSRP_4	-137≤ SRS-RSRP<-136	dBm
..	..	…
SRS-RSRP_95	-46≤ SRS-RSRP<-45	dBm
SRS-RSRP_96	-45≤ SRS-RSRP<-44	dBm
SRS-RSRP_97	-44≤ SRS-RSRP	dBm
SRS-RSRP_98	Infinity	
Note: 'Infinity' means that UE cannot detect SRS due to too strong signal to measure.		

The normative reference for this requirement is TS 38.133 [6] clause 10.1.22.1.2.

4.7.6.0.2 Minimum conformance requirements for CLI-RSSI measurement accuracy with FR1 serving cell

The CLI-RSSI measurement reported by the UE shall fulfil the accuracy requirements defined in Table 4.7.6.0.2-1 for FR1, provided that the following conditions are met.

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.

Table 4.7.6.0.2-1: CLI-RSSI absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	Io Note 1 range					
		NR operating band groups Note 2	Minimum Io				Maximum Io
dB	dB		dBm / SCS_{SRS}			$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
			SCS_{SRS} = 15 kHz	SCS_{SRS} = 30 kHz	SCS_{SRS} = 60 kHz		
±3.5	±6.5	NR_TDD_FR1_A,	-120	-117	-114	N/A	-70
		NR_TDD_FR1_C	-119	-116	-113	N/A	-70
		NR_TDD_FR1_D	-118.5	-115.5	-112.5	N/A	-70
		NR_TDD_FR1_E	-118	-115	-112	N/A	-70
±5.5	±8.5	Note 3	Note 3	Note 3	Note 3	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in 38.133 [6] clause 3.5.2. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.22.2.1

4.7.6.0.2.1 CLI-RSSI report mapping

The reporting range of CLI-RSSI is defined from -100 dBm to -25 dBm with 1 dB resolution. The mapping of measured quantity is defined in Table 4.7.6.0.2.1-1. The range in the signalling may be larger than the guaranteed accuracy range. UE shall scale the measured CLI-RSSI to report a nominal RSSI equivalent to 6RB measurement with 15kHz SCS.

Table 4.7.6.0.2.1-1: CLI-RSSI measurement report mapping

Reported value	Measured quantity value	Unit
CLI-RSSI_00	CLI-RSSI < -100	dBm
CLI-RSSI_01	-100 ≤ CLI-RSSI < -99	dBm
CLI-RSSI_02	-99 ≤ CLI-RSSI < -98	dBm
…	…	…
CLI-RSSI_74	-27 ≤ CLI-RSSI < -26	dBm
CLI-RSSI_75	-26 ≤ CLI-RSSI < -25	dBm
CLI-RSSI_76	-25 ≤ CLI-RSSI	dBm

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.22.2.2.

4.7.6.1 EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

4.7.6.1.1 Test purpose

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits. This test will verify the SRS-RSRP measurement requirements in clause 4.7.6.0.

4.7.6.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting NR EN-DC and CLI-based SRS-RSRP measurements.

4.7.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.6.1.

4.7.6.1.4 Test description

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1) and NR FR1 PSCell (Cell 2). The test parameters for Cell 1 are defined in Annex A.6. The test parameters for the Cell 2 are given in Table 4.7.6.1.5-1 below. The test parameter for the (virtual) neighbor cell UE transmitting SRS are given in Table 4.7.6.1.5-2. The SRS resource configuration is given in Table 4.7.6.1.5-3.

4.7.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.6.1.4.1-1.

Table 4.7.6.1.4.1-1: Supported test configurations for EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

Config	Description
4.7.6.1-1	LTE FDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
4.7.6.1-2	LTE FDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
4.7.6.1-3	LTE TDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
4.7.6.1-4	LTE TDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 4.7.6.1.4.1-2.

Table 4.7.6.1.4.1-2: Initial conditions for EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 4.7.6.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	

1. Message contents are defined in clause 4.7.6.1.4.3.

2. Cell 1 is the E-UTRAN PCell, with power levels and settings set according to Annex A.6. Cell 2 is the NR serving cell (PSCell). The power levels and settings for Cell 2 are set according to Annex C.1.2 and C.1.3. Virtual UE 1 is the target for SRS-RSRP measurements.

3. The test parameters are given in Table 4.7.6.1.4.1-3

4.7.6.1.4.2 Test procedure

Before the test UE is configured to perform SRS-RSRP measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS configuration in Table 4.7.6.1.5-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to the corresponding Test in Table 4.7.6.1.5-1 as appropriate.

3. The SS shall transmit an *RRCReconfiguration* message, embedded in an *RRCConnectionReconfiguration* message, configuring a CLI measurement object with periodic reporting, as specified in section 4.7.6.1.4.3.

4. The UE shall transmit an *RRCReconfigurationComplete* message, embedded in an *RRCConnectionReconfigurationComplete* message.

5. The UE shall transmit periodically *MeasurementReport* messages, embedded in *ULInformationTransferMRDC* messages.

6. After 10s wait from Step 5, the SS shall check the SRS-RSRP reported values in the periodic *MeasurementReport*. The reported SRS-RSRP value of the neighbor virtual UE is compared to the expected SRS-RSRP as specified in Table 4.7.6.1.5-4 and Table 4.7.6.1.5-5 for Test 1 and Test 2, correspondingly. If the reported value is outside the limits specified in such tables, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each Test in Table 4.7.6.1.5-1 as appropriate and repeat steps 2-7.

4.7.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 4.7.6.1.4.3-1: Common Exception messages for EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.4-1a Table H.3.4-2 Table H.3.4-3

Table 4.7.6.1.4.3-2: *MeasObjectToAddModList* for EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

Derivation Path: TS 38.508-1 [14], Table 4.6.3-77 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectToAddModList::= SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod {	1 entry		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectCLI-r16	MeasObjectCLI-r16		
}			
}			
}			

Table 4.7.6.1.4.3-3: *MeasObjectCLI-r16* for EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

Derivation Path: TS 38.508-1 [14], Table 4.6.3-76 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectCLI-r16 ::= SEQUENCE {			
cli-ResourceConfig-r16 SEQUENCE {			
srs-ResourceConfig-r16 CHOICE {			
setup SEQUENCE {			
SRS-ResourceListConfigCLI-r16 SEQUENCE {	1 entry		
srs-Resource-r16	SRSConf.1	entry 1	Config 1,3
	SRSConf.2	entry 1	Config 2,4
srs-SCS-r16	kHz15		Config 1,3
	kHz30		Config 2,4
refServCellIndex-r16	0	PSCell	
refBWP-r16	0	BWP-0	
}			
}			
}			
}			
}			

Table 4.7.6.1.4.3-4: *ReportConfigNR* for EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
cli-Periodical-r16 SEQUENCE {			
reportInterval-r16	ms240		
reportAmount-r16	infinity		
reportQuantityCLI-r16	srs-rsrp		
maxReportCLI-r16	1		
}			
}			
}			

Table 4.7.6.1.4.3-5: *MeasResultCLI-r16* for EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

Derivation Path: TS 38.508-1 [14], Table 4.6.3-79 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultCLI-r16 ::= SEQUENCE {			
measResultsListSRS-r16 CHOICE {			
srs-ResourceId-r16	SRS-ResourceId		
srs-RSRP-Result-r16	SRS-RSRP-Range-r16	INTEGER (0..98)	
}			
}			

4.7.6.1.5 Test requirement

Table 4.7.6.1.5-1 and Table 4.7.6.1.5-2 define the primary level settings including test tolerances for EN-DC SRS-RSRP measurement accuracy with FR1 serving cell. Table 4.7.6.1.5-3 defines the SRS resource configurations. Table 4.7.6.1.5-4 and Table 4.7.6.1.5-5 define the absolute accuracy requirements for Tests 1, 2 and 3 for configurations (1 and 3) and (2 and 4), correspondingly.

Table 4.7.6.1.5-1: NR Cell specific test parameters for EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

Parameter	Config	Unit	Test 1	Test 2	Test 3
SSB GSCN	1~4		freq1	freq1	freq1
Duplex mode	1~4		TDD	TDD	TDD
TDD configuration	1,3		TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
	2,4		TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1,3	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2,4		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,3		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
	2,4		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,3		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
	2,4		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,3		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
	2,4		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,3		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	2,4		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
OCNG Patterns	1~4		OP.1	OP.1	OP.1
TRS configuration	1,3		TRS.1.1 TDD	TRS.1.1 TDD	TRS.1.1 TDD
	2,4		TRS.1.2 TDD	TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1	SMTC.1	SMTC.1
Time offset between DL from serving cell and SRS from test system	1~4	μs	17.67	17.67	17.67
EPRE ratio of PSS to SSS	1~4	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					

EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2	NR_TDD_FR1_A Note3	1,3	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A Note3	2,4		Not applicable Note4	-91	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
N_{oc} Note2	NR_TDD_FR1_A Note3	1,3	dBm/SRS SCS	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A Note3	2,4		Not applicable Note4	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification						
Note 4: Test 1 is not used when testing with 30kHz SSB SCS						

Table 4.7.6.1.5-2: Neighbor UE specific test parameters for EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

Parameter		Config	Unit	Test 1	Test 2	Test 3
N_{oc} Note2	NR_TDD_FR1_A NOTE 5	1,3	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2,4		Not applicable Note 6	-91	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
N_{oc} Note2	NR_TDD_FR1_A NOTE 5	1,3	dBm/SRS SCS	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2,4		Not applicable Note 6	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109
$\hat{E}_s/I_{ot}$ on SRS	NR_TDD_FR1_A NOTE 5	1,3	dB	1.5	1.5	1.75
	NR_TDD_FR1_C					1.5
	NR_TDD_FR1_D					1.5
	NR_TDD_FR1_E					1.5

	NR_TDD_FR1_A NOTE 5	2,4		Not applicable Note 6	1.5	2.25
	NR_TDD_FR1_C					1.5
	NR_TDD_FR1_D					1.5
	NR_TDD_FR1_E					1.5
SRS RSRP Note3	NR_TDD_FR1_A NOTE 5	1,3	dBm/SRS SCS	-104.5	-86.5	-112.25
	NR_TDD_FR1_C					-111.5
	NR_TDD_FR1_D					-111
	NR_TDD_FR1_E					-110.5
	NR_TDD_FR1_A NOTE 5	2,4		Not applicable Note 6	-86.49	-108.74
	NR_TDD_FR1_C					-108.49
	NR_TDD_FR1_D					-107.99
	NR_TDD_FR1_E					-107.49
Io Note3	NR_TDD_FR1_A NOTE 5	1,3	dBm/9.36 MHz	-74.42	-56.42	-82.28
	NR_TDD_FR1_C					-81.42
	NR_TDD_FR1_D					-80.92
	NR_TDD_FR1_E					-80.42
	NR_TDD_FR1_A NOTE 5	2,4	dBm/38.16 MHz	Not applicable Note 6	-54.80	-77.49
	NR_TDD_FR1_C					-76.80
	NR_TDD_FR1_D					-76.30
	NR_TDD_FR1_E					-75.80
$\hat{E}_s / N_{oc}$ on SRS	NR_TDD_FR1_A NOTE 5	1,3	dB	1.5	1.5	1.75
	NR_TDD_FR1_C					1.5
	NR_TDD_FR1_D					1.5
	NR_TDD_FR1_E					1.5
	NR_TDD_FR1_A NOTE 5	2,4		Not applicable Note 6	1.5	2.25
	NR_TDD_FR1_C					1.5
	NR_TDD_FR1_D					1.5
	NR_TDD_FR1_E					1.5
Propagation condition		1,2,3,4		AWGN	AWGN	AWGN
Antenna configuration		1,2,3,4		1x2	1x2	1x2
SRS configuration		1,3		SRSConf.1	SRSConf.1	SRSConf.1
		2,4		SRSConf.2	SRSConf.2	SRSConf.2

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of the test.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 6: Test 1 is not used when testing with 30kHz SSB SCS
Note 7: For Test 3, values are specified based on NR_TDD_FR1_X but they apply also to the FDD band group counterpart, NR_FDD_FR1_X. Informatively, test parameters are defined based on band group A and then add Δ_{BG_offset}, which is the band group dependent component defined in clause 3A.4, Table 3A.4.1-2.

Table 4.7.6.1.5-3: SRS configuration for EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

	Field	SRSConf.1	SRSConf.2
SRS-ResourceSet	srs-ResourceSetId	0	0
	srs-ResourceIdList	0	0
	resourceType	Periodic	Periodic
	Usage	Codebook	Codebook
SRS-Resource	SRS-ResourceId	0	0
	nrofSRS-Ports	Port1	Port1

transmissionComb	n2	n2
combOffset-n2	0	0
cyclicShift-n2	0	0
resourceMapping startPosition	0	0
resourceMapping nrofSymbols	n1	n1
resourceMapping repetitionFactor	n1	n1
freqDomainPosition	0	0
freqDomainShift	0	0
freqHopping c-SRS	12	12
freqHopping b-SRS	0	0
freqHopping b-hop	0	0
groupOrSequenceHopping	Neither	Neither
resourceType	Periodic	Periodic
periodicityAndOffset-p	sl20, 9	sl40, 19
sequenceId	0	0

Table 4.7.6.1.5-4: Absolute accuracy requirements for the reported values for test configurations 1 and 3 of EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest SRS-RSRP reported value	30	45	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	23
			Bands NR_TDD_FR1_C	23
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	24
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	24
Highest SRS-RSRP reported value	41	62	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	33
			Bands NR_TDD_FR1_C	34
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	34
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	35
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2				

Table 4.7.6.1.5-5: Absolute accuracy requirements for the reported values for test configurations 2 and 4 of EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest SRS-RSRP reported value	N/A Note 2	44	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	26
			Bands NR_TDD_FR1_C	26
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	26
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	27
Highest SRS-RSRP reported value	N/A Note 2	63	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	37
			Bands NR_TDD_FR1_C	37
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	38
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	38
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2 Note 2: Test 1 is not used when testing with 30kHz SSB SCS				

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.6.2 EN-DC CLI-RSSI measurement accuracy with FR1 serving cell

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing.
- TT analysis is missing.
- Test Procedure is FFS.
- Test applicability needs to be updated

4.7.6.2.1 Test purpose

To verify that the UE makes correct reporting of CLI-RSSI measurement accuracy in TS 38.133 [6] clause 10.1.22.2.1.

4.7.6.2.2 Test applicability

FFS.

4.7.6.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.6.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.6.2.

4.7.6.2.4 Test description

4.7.6.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.6.2.4.1-1. Test environment parameters are given in Table 4.7.6.2.4.1-2.

Table 4.7.6.2.4.1-1: Applicable NR configurations for FR1 CLI-RSSI accuracy test

Config	Description
1	LTE FDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
3	LTE TDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 4.7.6.2.4.1-2: Test Environment parameters for EN-DC SSB based L1-RSRP measurement in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.6.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 4.7.6.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for CLI-RSSI measurements. Before the test UE is configured to perform CLI-RSSI measurement. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI resource and on 1 data symbol before.

4.7.6.2.4.2 Test procedure

FFS

4.7.6.2.4.3 Message contents

FFS

4.7.6.2.5 Test requirement

Table 4.7.6.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 4.7.6.2.5-1: NR Cell specific test parameters for CLI-RSSI accuracy

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD configuration	1,3		TDDConf.1.1
	2,4		TDDConf.2.1
$BW_{channel}$	1,3	MHz	10: $N_{RB,c}$ = 52
	2,4		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,3		SR.1.1 TDD
	2,4		SR.2.1 TDD
RMSI CORESET Reference Channel	1,3		CR.1.1 TDD
	2,4		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,3		CCR.1.1 TDD
	2,4		CCR.2.1 TDD
SSB configuration	1,3		SSB.1 FR1
	2,4		SSB.2 FR1
OCNG Patterns Note6	1~4		OP.1
TRS configuration	1,3		TRS.1.1 TDD
	2,4		TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1
Time offset between DL from serving cell and OCNG from test system	1~4	μs	17.67
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			

EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} on CLI-RSSI measurement resource Note2	1,3	dBm/15kHz	-106
	2,4		-106
N_{oc} on CLI-RSSI measurement resource Note2	1,3	dBm/ BWP SCS	-106
	2,4		-103
$\hat{E}_s / I_{ot}$ on CLI-RSSI measurement resource	1~4	dB	-Infinity
RSRP on CLI-RSSI measurement resource Note3	1~4	dBm/ BWP SCS	-Infinity
Io on CLI-RSSI measurement resource Note3	1,3	dBm/9.36 MHz	-78.05+TT
	2,4	dBm/38.16 MHz	-71.96+TT
Io on CLI-RSSI measurement resource Note3	1,3	dBm/1.08 MHz	-87.43+TT
	2,4		-87.44+TT
$\hat{E}_s / N_{oc}$ on CLI-RSSI measurement resource	1~4	dB	-Infinity
Propagation condition	1~4		AWGN
Antenna configuration	1~4		1x2

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 6: OCNG is not transmitted in the CLI-RSSI measurement resources.

Table 4.7.6.2.5-2: CLI-RSSI measurement resource configuration for FR1 CLI-RSSI accuracy

	Field	Config	SRSConf.1
CLI-RSSI measurement resource	rssi-ResourceId	1~4	0
	rssi-SCS	1,3	15kHz
		2,4	30kHz
	startPRB	1~4	0
	nrofPRBs	1,3	52
		2,4	106
	startPosition	1~4	3
	nrofSymbols	1~4	11
	rssi-PeriodicityAndOffset	1,3	sl20, 9
		2,4	sl40, 19

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.7 L1-SINR measurement for beam reporting

4.7.7.0 Minimum conformance requirements

4.7.7.0.1 Minimum conformance requirements for CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off

The UE shall be capable of performing L1-SINR measurements with the CSI-RS configured as CMR and no dedicated resource configured as IMR for L1-SINR computation, and the UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ is defined in Table 4.7.7.0.1-1 for FR1 and in Table 4.7.7.0.1-2 for FR2, where

For the value of M,

- For periodic and semi-persistent CSI-RS resources as CMR, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise;
- For aperiodic CSI-RS resources as CMR, M=1.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 of TS 38.133 [6] if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured for all resources in the resource set.

For the value of P in FR1,

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For the value of P in FR2,

- P=1, when CSI-RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is not overlapped with SMTC occasion ($T_{CSI-RS} < MGRP$)

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).

- P=3, when CSI-RS is not overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq MGRP$ or

  - $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} < 0.5*T_{SMTCperiod}$

- $P=\frac{3}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} = 0.5*T_{SMTCperiod}$

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{\min(T_{SMTCperiod},MGRP)}}$, when CSI-RS is partially overlapped with measurement gap ($T_{CSI-RS} < MGRP$) and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- $P=\frac{3}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)

Where:

$T_{SMTCperiod}$ = the configured SMTC1 period or SMTC2 period if configured.

T_{CSI-RS} = the periodicity of CSI-RS configured for L1-SINR measurement

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Note: The overlap between CSI-RS for L1-SINR measurement and SMTC means that CSI-RS for L1-SINR measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 4.7.7.0.1-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI-RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{CSI-RS}))$

DRX cycle > 320ms	ceil(M*P)*T_{DRX}
Note 1:	T_{CSI-RS} is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
Note 2:	the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.

Table 4.7.7.0.1-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P*N)*T_{CSI-RS})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},T_{CSI-RS}))
DRX cycle > 320ms	ceil(M*P*N)*T_{DRX}
Note 1:	T_{CSI-RS} is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
Note 2:	the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.

The accuracy requirements in Table 4.7.7.0.1-3 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS as CMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 4.7.7.0.1-3.

Table 4.7.7.0.1-3: L1-SINR absolute accuracy for CSI-RS based CMR only in FR1

Accuracy		**Conditions**						
Normal condition	**Extreme condition**	**CSI-RS CMR Ês/Iot**	**Io [Note 1] range**					
			NR operating band groups [Note 2]	**Minimum Io**				**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{CSI-RS}**			**dBm/BW Channel**	**dBm/$BW_{Channel}$**
				SCS_{CSI-RS} = 15 kHz	**SCS_{CSI-RS} = 30 kHz**	**SCS_{CSI-RS} = 60 kHz**		
±5.5	±6.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								

The normative reference for this requirement is TS 38.133 [6] clauses 9.8.4.1 and 10.1.27.1.

4.7.7.0.2 Minimum conformance requirements for SSB based CMR and dedicated IMR

The UE shall be capable of performing L1-SINR measurements with the SSB configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to SSB configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as SSB configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ is defined in Table 4.7.7.0.2-1 for FR1 and in Table 4.7.7.0.2-2 for FR2, where

For the value of M

- For periodic or semi-persistent NZP CSI-RS or CSI-IM resource as dedicated IMR, M=1 if the higher layer parameters *timeRestrictionForChannelMeasurements* and/or *timeRestrictionForInterferenceMeasurements* are configured, and M=3 otherwise;

For the value of N in FR2

- N = 8.

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- the value of P_{CMR} shall be derived in the same way as the value of P used for SSB based L1-RSRP measurement in clause 9.5.4.1 of TS 38.133 [6], in which the occasions and period of the SSB for CMR shall be used instead.

- the value of P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2 of TS 38.133 [6], in which the occasions and period of the NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with SSB as CMR and CSI-RS or CSI-IM as IMR, the requirement shall apply if the CSI-RS is configured as IMR with repetition field as “repetition = OFF” or CSI-IM is configured as IMR.

For L1-SINR measurement with SSB as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if SSB occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap

Table 4.7.7.0.2-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-SINR channel measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.	

Table 4.7.7.0.2-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(1.5*M*P*N)*T_{DRX}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-SINR measurement. T_{DRX} is the DRX cycle length.	

Note 2:	T_{Report} is configured periodicity for reporting. The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.

The accuracy requirements in Tables 4.7.7.0.2-3 and 4.7.7.0.2-4 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.
- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 4.7.7.0.2-3 and 4.7.7.0.2-4.

Table 4.7.7.0.2-3: L1-SINR absolute accuracy for SSB based CMR and NZP-IMR in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB-CMR Ês/Iot	NZP-IMR Ês/Iot	Io Note 1 range			
				NR operating band groups Note 2	Minimum Io		Maximum Io
dB	dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
					SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.0	±5.0	≥0	≥0	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
				NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
				NR_TDD_FR1_C	-120	-117	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								

Table 4.7.7.0.2-4: L1-SINR absolute accuracy for SSB based CMR and ZP-IMR in FR1

Accuracy		Conditions				
Normal condition	Extreme condition	SSB-CMR Ês/Iot	Io Note 1 range			
			NR operating band groups Note 2	Minimum Io		Maximum Io
dB	dB	dB		dBm / SCS_{SSB}	$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
			NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50

±4.5	±5.5	≥-3	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							

The normative reference for this requirement is TS 38.133 [6] clauses 9.8.4.2 and 10.1.27.2.

4.7.7.0.3 Minimum conformance requirements for CSI-RS based CMR and dedicated IMR

The UE shall be capable of performing L1-SINR measurements with the CSI-RS resource configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to CSI-RS resource configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as CSI-RS resource configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ is defined in Table 4.7.7.0.3-1 for FR1 and in Table 4.7.7.0.2-2 for FR2, where

For the value of M,

- M=1 shall be applied if
  - aperiodic NZP-CSI-RS as CMR or dedicated IMR, or
  - aperiodic CSI-IMR as dedicated IMR, or
  - periodic and semi-persistent NZP-CSI-RS as CMR or dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured, or
  - periodic and semi-persistent CSI-IM as dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured;
- M=3 otherwise.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.

- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 of TS 38.133 [6] if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured for all resources in the resource set.

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- The value of P_{CMR} and P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2 of TS 38.133 [6], in which the occasions and period of the CSI-RS for CMR and NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead respectively.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS as IMR, the requirement shall apply only if CSI-RS resources as CMR and IMR are configured with the same repetition field and the number of CSI-RS resources in the resource sets for CMR and IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-IM as IMR, the requirement shall apply only if the number of CSI-RS resources in the resource set for CMR and the number of CSI-IM resources in the resource set for IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if CSI-RS occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap.

Table 4.7.7.0.3-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3. Note 3: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to CSI-RS configured for channel measurement, with the same periodicity.	

Table 4.7.7.0.3-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P*N)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	

Note 3:	The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to CSI-RS configured for channel measurement, with the same periodicity.

The accuracy requirements in Tables 4.7.7.0.3-3 and 4.7.7.0.3-4 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 4.7.7.0.3-3 and 4.7.7.0.3-4.

Table 4.7.7.0.3-3: L1-SINR absolute accuracy for CSI-RS based CMR and NZP-IMR in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot	NZP-IMR Ês/Iot	Io Note 1 range				
				NR operating band groups Note 2	Minimum Io			Maximum Io
dB	dB	dB	dB		dBm / SCS_{CSI-RS}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
					SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz	
±4.0	±5.0	≥0	≥0	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
				NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
				NR_TDD_FR1_C	-120	-117	-114	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	-112	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.									

Table 4.7.7.0.3-4: L1-SINR absolute accuracy for CSI-RS based CMR and ZP-IMR in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot	Io Note 1 range					
			NR operating band groups Note 2	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 15	SCS_{CSI-RS} = 30	SCS_{CSI-RS} = 60		

				kHz	kHz	kHz		
±4.5	±5.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								

The normative reference for this requirement is TS 38.133 [6] clauses 9.8.4.3 and 10.1.27.3.

4.7.7.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement

4.7.7.1.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR absolute measurement accuracy

4.7.7.1.1.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

4.7.7.1.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards. Applicability requires support for L1-SINR measurements on the NR PSCell.

4.7.7.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.7.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.7.1.

4.7.7.1.1.4 Test description

4.7.7.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.7.1.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.7.7.1.1.4.1-2.

Table 4.7.7.1.1.4.1-1: EN-DC CSI-RS based CMR without dedicated IMR L1-SINR measurement supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 4.7.7.1.1.4.1-2: Test Environment parameters for EN-DC CSI-RS based CMR without dedicated IMR L1-SINR measurement

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.7.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.7.1.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell (PSCell). Cell 2 is the target for CSI-RS-based L1-SINR measurements. Before the test, UE is configured to perform RLM and BFD measurement based on the SSBs. The connection setup is done according to the settings in Annex C.1.1.

4.7.7.1.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 4.7.7.1.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 4.7.7.1.1.4.1-2.

2. Set the parameters according to T1 in Table 4.7.7.1.1.5-1.

3. The UE shall start sending L1-SINR report including results of both CSI-RS#0 and CSI-RS #1 every 80 slots.

4. The SS shall check the L1-SINR reported values of CSI-RS #0 and CSI-RS #1 in the periodic L1-SINR reports. If the value for both CSI-RSs is within the limits in Table 4.7.7.1.1.5-2 or Table 4.7.7.1.1.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 4.7.7.1.1.5-1 as appropriate and repeat steps 3-5.

4.7.7.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.7.1.1.4.3-1: Common Exception messages EN-DC CSI-RS based CMR without dedicated IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and CSI-SINR Table H.3.6A-2 with conditions CSI-RS and PERIODIC Table H.3.6A-3 with condition PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.7.1.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

4.7.7.1.1.5 Test requirement

Table 4.7.7.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-SINR measurement report for each of the tests in Table 4.7.7.1.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.7.1.1.5-2 for test configurations 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 4.7.7.1.1.5-3 for test configurations 3 and 6.

Table 4.7.7.1.1.5-1: FR1 CSI-RS based L1-SINR test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1	SSB.1 FR1
	2,5		SSB.1 FR1	SSB.1 FR1
	3,6		SSB.2 FR1	SSB.2 FR1
OCNG Patterns	1~6		OP.1	OP.1
TRS configuration	1,4		TRS.1.1 FDD	TRS.1.1 FDD
	2,5		TRS.1.1 TDD	TRS.1.1 TDD
	3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1

Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~6		SMTC.1	SMTC.1
CSI-RS		1,4		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
		2,5		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
		3,6		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType		1~6		periodic	periodic
reportQuantity-r16		1~6		cri-SINR-r16	cri-SINR-r16
nrofReportedRS		1~6		2	2
L1-RSRP reporting period		1~6		slot80	slot80
EPRE ratio of PSS to SSS		1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	Depending on band group	1,2,4,5	dBm/15kHz	-94.65	-117+ Δ_{BG_offset}
		3,6		-96.00	-117+ Δ_{BG_offset}
N_{oc} Note2		1,2,4,5	dBm/SSB SCS	-94.65	-117+ Δ_{BG_offset}
		3,6		-93.00	-114+ Δ_{BG_offset}
$\hat{E}_s/I_{ot}$		1~6	dB	10	-2.2
SSB RSRP Note3	Depending on band group	1,2,4,5	dBm/SSB SCS	-84.65	-119.2 + Δ_{BG_offset}
		3,6		-83.00	-116.2 + Δ_{BG_offset}
Io Note3	Depending on band group	1,2,4,5	dBm/9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
		3,6	dBm/38.16 MHz	-51.53	-80.90 + Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		1~6	dB	10	-2.2
Propagation condition		1~6		AWGN	AWGN
Antenna configuration		1~6		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 4.7.7.1.1.5-2: L1-SINR absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	52	All Bands	28
Highest reported value (Cell 2)	81	All Bands	57
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	51	All Bands	27
Highest reported value (Cell 2)	82	All bands	58
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 4.7.7.1.1.5-3: L1-SINR absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	52	All Bands	28
Highest reported value (Cell 2)	81	All Bands	57
Extreme Conditions	**Test 1**	**Test 2**	

	All bands		
Lowest reported value (Cell 2)	51	All Bands	27
Highest reported value (Cell 2)	82	All Bands	58
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

[IS: this new clause creates a duplication!!!!!!]

4.7.7.1.2 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR relative measurement accuracy

4.7.7.1.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR relative measurement accuracy is within the specified limits.

4.7.7.1.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards. Applicability requires support for L1-SINR measurements on the NR PSCell.

4.7.7.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.7.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.7.1.

4.7.7.1.2.4 Test description

4.7.7.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.7.1.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.7.7.1.2.4.1-2.

Table 4.7.7.1.2.4.1-1: EN-DC CSI-RS based CMR without dedicated IMR L1-SINR measurement supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 4.7.7.1.2.4.1-2: Test Environment parameters for EN-DC CSI-RS based CMR without dedicated IMR L1-SINR measurement

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.7.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.7.1.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell (PSCell). Cell 2 is the target for CSI-RS-based L1-SINR measurements. Before the test, UE is configured to perform RLM and BFD measurement based on the SSBs. The connection setup is done according to the settings in Annex C.1.1.

4.7.7.1.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 4.7.7.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 4.7.7.1.2.4.1-2.
2. Set the parameters according to T1 in Table 4.7.7.2.1.5-1.
3. The UE shall start sending L1-SINR report including results of both CSI-RS#0 and CSI-RS #1 every 80 slots.
4. The SS shall check the L1-SINR reported values of CSI-RS #0 and CSI-RS #1 in the periodic L1-SINR reports. The L1-SINR value for CSI-RS #1 is compared to the L1-SINR value for CSI-RS #0. If the difference is within the limits in Table 4.7.7.1.2.5-2 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.
5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
6. Set the parameters according to each sub-test in Table 4.7.4.2.1.5-1 as appropriate and repeat steps 3-5.

4.7.7.1.2.4.3 Message contents

Same message contents as described in section 4.7.7.1.1.4.3

4.7.7.1.2.5 Test requirement

Table 4.7.7.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-SINR measurement report for each of the tests in Table 4.7.7.1.2.5-1 shall meet the corresponding relative accuracy requirements in Table 4.7.7.1.2.5-2.

Table 4.7.7.1.2.5-1

Same as Table 4.7.7.1.1.5-1

Table 4.7.7.1.2.5-2: L1-SINR relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (CSI-RS#1)	L1-SINR_x - 9	L1-SINR_x - 9
Highest reported value (CSI-RS#1)	L1-SINR _x + 9	L1-SINR _x + 9
Extreme Conditions		
Lowest reported value (CSI-RS#1)	L1-SINR _x - 10	L1-SINR _x - 10
Highest reported value (CSI-RS#1)	L1-SINR _x + 10	L1-SINR _x + 10
L1-SINR_x is the reported value of Cell 2		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.7.2 EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy

4.7.7.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

4.7.7.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards. Applicability requires support for L1-SINR measurements on the NR PSCell.

4.7.7.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.7.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.7.2.

4.7.7.2.4 Test description

4.7.7.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.7.2.4.1-1.

Table 4.7.7.2.4.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with SSB based CMR and CSI-IM based IMR

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 4.7.7.2.4.1-2.

Table 4.7.7.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.7.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.7.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell. Cell 2 is the PSCell and the target for SSB-based L1-SINR measurements. Before the test, UE is configured one SSB resource set with two SSB resources and one CSI-IM resource set with two CSI-IM resource. UE is configured to perform RLM and BFD measurement based on the SSB resources 0 and 1. UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-IM resources as IMR. The connection setup is done according to the settings in Annex C.1.1.

4.7.7.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 4.7.4.1.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 4.7.7.2.4.1-2.

2. Set the parameters according to T1 in Table 4.7.7.2.5-1.

3. The UE shall start sending L1-SINR report including results of both SSB#0 and SSB#1 every 80 slots.

4. The SS shall check the L1-SINR reported values of SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 in the periodic L1-SINR reports. If the value for both SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 is within the limits in Table 4.7.7.2.5-2 or Table 4.7.7.2.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 4.7.7.2.5-1 as appropriate and repeat steps 3-5.

4.7.7.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.7.2.4.3-1: Common Exception messages EN-DC SSB based L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and SS-SINR and CSI-RS_IMR Table H.3.6A-2 with conditions SSB and PERIODIC Table H.3.6A-4 with condition PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.7.2.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

4.7.7.2.5 Test requirement

Table 4.7.7.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-SINR measurement report for each of the tests in Table 4.7.7.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.7.2.5-2 for test configurations 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 4.7.7.2.5-3 for test configurations 3 and 6.

Table 4.7.7.2.5-1: FR1 L1-SINR measurement test with SSB based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1	SSB.3 FR1
	2,5		SSB.3 FR1	SSB.3 FR1
	3,6		SSB.4 FR1	SSB.4 FR1

CSI-IM configuration		1,4		CSI-IM 1.1 FDD	CSI-IM 1.1 FDD
		2,5		CSI-IM 1.1 TDD	CSI-IM 1.1 TDD
		3,6		CSI-IM 2.1 TDD	CSI-IM 2.1 TDD
OCNG Patterns		1~6		OP.1	OP.1
TRS configuration		1,4		TRS.1.1 FDD	TRS.1.1 FDD
		2,5		TRS.1.1 TDD	TRS.1.1 TDD
		3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~6		SMTC.1	SMTC.1
reportConfigType		1~6		periodic	periodic
reportQuantity-r16		1~6		ssb-Index-SINR-r16	ssb-Index-SINR-r16
Number of reported RS		1~6		2	2
L1-SINR reporting period		1~6		slot80	slot80
EPRE ratio of PSS to SSS		1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
N_{oc} Note2	Depending on band group	1,2,4,5	dBm/15kHz	-94.65	-117+ Δ_{BG_offset}
		3,6		-96.00	-117+ Δ_{BG_offset}
N_{oc} Note2		1,2,4,5	dBm/SSB SCS	-94.65	-117+ Δ_{BG_offset}
		3,6		-93.00	-114+ Δ_{BG_offset}
$\hat{E}_s / I_{ot}$		1~6	dB	10	-2.2
SSB RSRP Note3	Depending on band group	1,2,4,5	dBm/SSB SCS	-84.65	-119.2 + Δ_{BG_offset}
		3,6		-83.00	-116.2 + Δ_{BG_offset}
Io Note3	Depending on band group	1,2,4,5	dBm/9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
		3,6	dBm/38.16 MHz	-51.53	-80.90 + Δ_{BG_offset}
EPRE ratio of OCNG to OCNG DMRS Note 1					
$\hat{E}_s / N_{oc}$		1~6	dB	10	-2.2
Propagation condition		1~6		AWGN	AWGN
antenna configuration		1~6		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 4.7.7.2.5-2: L1-SINR absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	54	All Bands	30
Highest reported value (Cell 2)	79	All Bands	55
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	53	All Bands	29
Highest reported value (Cell 2)	80	All Bands	56
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 4.7.7.2.5-3: L1-SINR absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	54	All Bands	30

Highest reported value (Cell 2)	79	All Bands	55
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	53	All Bands	29
Highest reported value (Cell 2)	80	All Bands	56
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.7.3 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement

4.7.7.3.1 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR absolute measurement accuracy

4.7.7.3.1.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

4.7.7.3.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards. Applicability requires support of L1-SINR measurements between an E-UTRA PCell and an NR PSCell.

4.7.7.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.7.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.7.3.

4.7.7.3.1.4 Test description

4.7.7.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.7.3.1.4.1-1.

Table 4.7.7.3.1.4.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with CSI-RS based both CMR based IMR

Config	Description
1	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band.	

Configure the test equipment and the DUT according to the parameters in Table 4.7.7.3.1.4.1-2.

Table 4.7.7.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.7.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.7.3.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell. Cell 2 is the PSCell and the target for CSI-RS based L1-SINR measurements. Before the test, UE is configured two CSI-RS resource sets with two CSI-RS resources for each set. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as both CMR and IMR. The connection setup is done according to the settings in Annex C.1.1.

4.7.7.3.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 4.7.4.1.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 4.7.7.3.1.4.1-2.
2. Set the parameters according to T1 in Table 4.7.7.3.1.5-1.
3. The UE shall start sending L1-SINR report including results of both CSI-RS#0+CSI-IM#0 and CSI-RS#1+CSI-IM#1 every 80 slots.
4. The SS shall check the L1-SINR reported values of CSI-RS#0 and CSI-RS #1 in the periodic L1-SINR reports. If the value for both CSI-RSs is within the limits in Table 4.7.7.3.1.5-2 or Table 4.7.7.3.1.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 4.7.7.3.1.5-1 as appropriate and repeat steps 3-5.

4.7.7.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.7.3.1.4.3-1: Common Exception messages EN-DC CSI-RS based CMR without dedicated IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and CSI-SINR and CSI-IM_IMR Table H.3.6A-2 with conditions CSI-RS and PERIODIC Table H.3.6A-3 with condition PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.7.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

4.7.7.3.1.5 Test requirement

Table 4.7.7.3.5-1 defines the primary level settings not including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 4.7.7.3.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.7.3.1.5-2 for test configurations 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 4.7.7.3.1.5-3 for test configurations 3 and 6.

Table 4.7.7.3.1.5-1: FR1 L1-SINR measurement test with CSI-RS based both CMR and IMR

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD

RMSI CORESET Reference Channel		1,4		CR.1.1 FDD	CR.1.1 FDD
		2,5		CR.1.1 TDD	CR.1.1 TDD
		3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel		1,4		CCR.1.1 FDD	CCR.1.1 FDD
		2,5		CCR.1.1 TDD	CCR.1.1 TDD
		3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration		1,4		SSB.1 FR1	SSB.1 FR1
		2,5		SSB.1 FR1	SSB.1 FR1
		3,6		SSB.2 FR1	SSB.2 FR1
OCNG Patterns		1~6		OP.1	OP.1
TRS configuration		1,4		TRS.1.1 FDD	TRS.1.1 FDD
		2,5		TRS.1.1 TDD	TRS.1.1 TDD
		3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~6		SMTC.1	SMTC.1
CSI-RS configuration as CMR		1,4		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
		2,5		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
		3,6		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
CSI-RS configuration as IMR		1,4		CSI-RS 1.3A FDD	CSI-RS 1.3A FDD
		2,5		CSI-RS 1.3A TDD	CSI-RS 1.3A TDD
		3,6		CSI-RS 2.3A TDD	CSI-RS 2.3A TDD
reportConfigType		1~6		periodic	periodic
reportQuantity-r16		1~6		cri-SINR-r16	cri-SINR-r16
nrofReportedRS		1~6		2	2
L1-RSRP reporting period		1~6		slot80	slot80
EPRE ratio of PSS to SSS		1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
$\hat{E}_s/I_{ot}$		1~6	dB	10	0.8
N_{oc} Note2	Depending on band group	1,2,4,5	dBm/15kHz	-94.65	-117+ Δ_{BG_offset}
		3,6		-96.00	-117+ Δ_{BG_offset}
N_{oc} Note2		1,2,4,5	dBm/SSB SCS	-94.65	-117+ Δ_{BG_offset}
		3,6		-93.00	-114+ Δ_{BG_offset}
$\hat{E}_s/I_{ot}$		1~6	dB	10	0.8
SSB RSRP Note3	Depending on band group	1,2,4,5	dBm/SSB SCS	-84.65	-119.2 + Δ_{BG_offset}
		3,6		-83.00	-116.2 + Δ_{BG_offset}
Io Note3	Depending on band group	1,2,4,5	dBm/9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
		3,6	dBm/38.16 MHz	-51.53	-80.90 + Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		1~6	dB	10	0.8
Propagation condition		1~6		AWGN	AWGN
Antenna configuration		1~6		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 4.7.7.3.1.5-2: L1-SINR absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	54	All Bands	30
Highest reported value (Cell 2)	79	All Bands	55
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	53	All Bands	29
Highest reported value (Cell 2)	80	All Bands	56
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 4.7.7.3.1.5-3: L1-SINR absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	Test 1 All bands	Test 2

Lowest reported value (Cell 2)	54	All Bands	30
Highest reported value (Cell 2)	79	All Bands	55
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	53	All Bands	29
Highest reported value (Cell 2)	80	All Bands	56
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.7.3.2 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR relative measurement accuracy

4.7.7.3.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR relative measurement accuracy is within the specified limits.

4.7.7.3.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards. Applicability requires support for L1-SINR measurements on the NR PSCell.

4.7.7.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.7.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.7.3.

4.7.7.3.2.4 Test description

4.7.7.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.7.3.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 4.7.7.3.2.4.1-2.

Table 4.7.7.3.2.4.1-1: EN-DC CSI-RS based CMR with dedicated IMR L1-SINR measurement supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 4.7.7.3.2.4.1-2: Test Environment parameters for EN-DC CSI-RS based CMR with dedicated IMR L1-SINR measurement

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.7.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.7.3.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR1 cell (PSCell). Cell 2 is the target for CSI-RS-based L1-SINR measurements. Before the test, UE is configured two CSI-RS resource sets with two CSI-RS resources for each set. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as both CMR and IMR. The connection setup is done according to the settings in Annex C.1.1.

4.7.7.3.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 4.7.7.3.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 4.7.7.3.2.4.1-2.

2. Set the parameters according to T1 in Table 4.7.7.3.2.5-1.

3. The UE shall start sending L1-SINR report including results of both CSI-RS#0 and CSI-RS #1 every 80 slots.

4. The SS shall check the L1-SINR reported values of CSI-RS #0 and CSI-RS #1 in the periodic L1-SINR reports. The L1-SINR value for CSI-RS #1 is compared to the L1-SINR value for CSI-RS #0. If the difference is within the limits in Table 4.7.7.3.2.5-2 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 4.7.7.3.2.5-1 as appropriate and repeat steps 3-5.

4.7.7.3.2.4.3 Message contents

Same message contents as described in section 4.7.7.3.1.4.3

4.7.7.3.2.5 Test requirement

Table 4.7.7.3.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-SINR measurement report for each of the tests in Table 4.7.7.3.2.5-1 shall meet the corresponding relative accuracy requirements in Table 4.7.7.3.2.5-2.

Table 4.7.7.3.2.5-1

Same as Table 4.7.7.3.1.5-1

Table 4.7.7.3.2.5-2: L1-SINR relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (CSI-RS#1)	L1-SINR_x - 9	L1-SINR_x - 9
Highest reported value (CSI-RS#1)	L1-SINR _x + 9	L1-SINR _x + 9
Extreme Conditions		
Lowest reported value (CSI-RS#1)	L1-SINR _x - 10	L1-SINR _x - 10
Highest reported value (CSI-RS#1)	L1-SINR _x + 10	L1-SINR _x + 10
L1-SINR_x is the reported value of Cell 2		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.8 CSI-RSRP

4.7.8.0 Minimum conformance requirements

4.7.8.0.1 Intra-frequency absolute CSI-RSRP measurement accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell where the CSI-RS resources to be measured have the same centre frequency as the CSI-RS resources indicated for measurement in the serving cell in FR1.

The accuracy requirements in Table 4.7.8.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.

- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.8.0.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

Table 4.7.8.0.1-1: CSI-RSRP Intra frequency absolute accuracy in FR1

Accuracy		Conditions						
			Io [Note 1] range					
Normal condition	Extreme condition	CSI-RS Ês/Iot	NR operating band groups [Note 2]	Minimum Io				Maximum Io
				dBm / SCS_{CSI-RS}				
dB	dB	dB		SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz	$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
±4.5	±9	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
			NR_FDD_FR1_N	-114.5	-111.5	-108.5	N/A	-70
±8	±11	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H, NR_FDD_FR1_N	N/A	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3A.4.1.

The reporting range of SS-RSRP and CSI-RSRP for L3 reporting is defined from -156 dBm to -31 dBm with 1 dB resolution. The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 4.7.8.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 4.7.8.0.1-2: SS-RSRP and CSI-RSRP measurement report mapping

Reported value	Measured quantity value (L3 SS-RSRP)	Measured quantity value (L1 SS-RSRP and	Unit

	and CSI-RSRP	CSI-RSRP)	
RSRP_0	SS-RSRP<-156	Not valid	dBm
RSRP_1	-156≤ SS-RSRP<-155	Not valid	dBm
RSRP_2	-155≤ SS-RSRP<-154	Not valid	dBm
RSRP_3	-154≤ SS-RSRP<-153	Not valid	dBm
RSRP_4	-153≤ SS-RSRP<-152	Not valid	dBm
RSRP_5	-152≤ SS-RSRP<-151	Not valid	dBm
RSRP_6	-151≤ SS-RSRP<-150	Not valid	dBm
RSRP_7	-150≤ SS-RSRP<-149	Not valid	dBm
RSRP_8	-149≤ SS-RSRP<-148	Not valid	dBm
RSRP_9	-148≤ SS-RSRP<-147	Not valid	dBm
RSRP_10	-147≤ SS-RSRP<-146	Not valid	dBm
RSRP_11	-146≤ SS-RSRP<-145	Not valid	dBm
RSRP_12	-145≤ SS-RSRP<-144	Not valid	dBm
RSRP_13	-144≤ SS-RSRP<-143	Not valid	dBm
RSRP_14	-143≤ SS-RSRP<-142	Not valid	dBm
RSRP_15	-142≤ SS-RSRP<-141	Not valid	dBm
RSRP_16	-141≤ SS-RSRP<-140	RSRP<-140	dBm
RSRP_17	-140≤ SS-RSRP<-139	-140≤RSRP<-139	dBm
RSRP_18	-139≤ SS-RSRP<-138	-139≤ RSRP<-138	dBm
…	…		…
RSRP_111	-46≤ SS-RSRP<-45	-46≤ RSRP<-45	dBm
RSRP_112	-45≤ SS-RSRP<-44	-45≤ RSRP<-44	dBm
RSRP_113	-44≤ SS-RSRP<-43	-44≤ RSRP	dBm
RSRP_114	-43≤ SS-RSRP<-42	Not valid	dBm
RSRP_115	-42≤ SS-RSRP<-41	Not valid	dBm
RSRP_116	-41≤ SS-RSRP<-40	Not valid	dBm
RSRP_117	-40≤ SS-RSRP<-39	Not valid	dBm
RSRP_118	-39≤ SS-RSRP<-38	Not valid	dBm
RSRP_119	-38≤ SS-RSRP<-37	Not valid	dBm
RSRP_120	-37≤ SS-RSRP<-36	Not valid	dBm
RSRP_121	-36≤ SS-RSRP<-35	Not valid	dBm
RSRP_122	-35≤ SS-RSRP<-34	Not valid	dBm
RSRP_123	-34≤ SS-RSRP<-33	Not valid	dBm
RSRP_124	-33≤ SS-RSRP<-32	Not valid	dBm
RSRP_125	-32≤ SS-RSRP<-31	Not valid	dBm
RSRP_126	-31≤ SS-RSRP	Not valid	dBm
RSRP_127 (Note)	Infinity	Infinity	dBm
Note: The value of RSRP_127 is applicable for RSRP threshold configured by the network as defined in TS 38.331 [2], but not for the purpose of measurement reporting.			

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.2.3.1 and 10.1.6.

4.7.8.0.2 Intra-frequency relative CSI-RSRP measurement accuracy requirements

The relative accuracy of CSI-RSRP is defined as the CSI-RSRP measured from one cell compared to the CSI-RSRP measured from another cell on the same center frequency, or between any two CSI-RSRP levels measured on the same cell in FR1.

The accuracy requirements in Table 4.7.8.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.8.0.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

Table 4.7.8.0.2-1: CSI-RSRP Intra frequency relative accuracy in FR1

Accuracy		Conditions						
			Io [Note 1] range					
Normal condition	Extreme condition	CSI-RS Ês/Iot [Note 2]	NR operating band groups [Note 4]	Minimum Io				Maximum Io
		dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
dB	dB			SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±2	±3	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
			NR_FDD_FR1_N	-114.5	-111.5	-108.5	N/A	-50
±3	±3	≥-6	Note 3	Note 3	Note 3	Note 3	N/A	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

The reporting range of differential SS-RSRP and CSI-RSRP for L1 reporting and L3 reporting is defined from 0 dB to -30 dB with 2 dB resolution.

The mapping of measured quantity is defined in Table 4.7.8.0.2-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 4.7.8.0.2-2: Differential SS-RSRP and CSI-RSRP measurement (for L1 reporting and L3 reporting) report mapping

Reported value	Measured quantity value (difference in measured RSRP from strongest RSRP)	Unit
DIFFRSRP_0	0≥ΔRSRP>-2	dB

DIFFRSRP_1	-2≥ΔRSRP>-4	dB
DIFFRSRP_2	-4≥ΔRSRP>-6	dB
DIFFRSRP_3	-6≥ΔRSRP>-8	dB
DIFFRSRP_4	-8≥ΔRSRP>-10	dB
DIFFRSRP_5	-10≥ΔRSRP>-12	dB
DIFFRSRP_6	-12≥ΔRSRP>-14	dB
DIFFRSRP_7	-14≥ΔRSRP>-16	dB
DIFFRSRP_8	-16≥ΔRSRP>-18	dB
DIFFRSRP_9	-18≥ΔRSRP>-20	dB
DIFFRSRP_10	-20≥ΔRSRP>-22	dB
DIFFRSRP_11	-22≥ΔRSRP>-24	dB
DIFFRSRP_12	-24≥ΔRSRP>-26	dB
DIFFRSRP_13	-26≥ΔRSRP>-28	dB
DIFFRSRP_14	-28≥ΔRSRP>-30	dB
DIFFRSRP_15	-30≥ΔRSRP	dB

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.2.3.2 and 10.1.6.

4.7.8.0.3 Inter-frequency absolute CSI-RSRP measurement accuracy requirements

The requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell where the CSI-RS resources to be measured have the different center frequency as the CSI-RS resources indicated for measurement in the serving cell in FR1.

The accuracy requirements in Table 4.7.8.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.8.0.3-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 4.7.8.0.3-1: CSI-RSRP Inter frequency Absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 1 range					
			NR operating band groups Note 2	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
			NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70

±4.5	±9	≥-6	NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
			NR_FDD_FR1_N	-114.5	-111.5	-108.5	N/A	-70
±8	±11	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H, NR_FDD_FR1_N	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3A.4.1.								

The reporting range of SS-RSRP and CSI-RSRP for L3 reporting is defined from -156 dBm to -31 dBm with 1 dB resolution. The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 4.7.8.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.4.3.1 and 10.1.6.

4.7.8.0.4 Inter-frequency relative CSI-RSRP measurement accuracy requirements

The relative accuracy of CSI-RSRP in inter frequency case is defined as the CSI-RSRP measured from one cell on a frequency in FR1compared to the CSI-RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 4.7.8.0.4-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.8.0.4-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.
- $|CSI_RP1_{dBm} - CSI_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 4.7.8.0.4-1: CSI-RSRP Inter frequency relative accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot Note 2	Io Note 1 range					
			NR operating band groups Note 4	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±4.5	±6	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
			NR_FDD_FR1_N	-113.5	-111.5	-108.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: Void
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

The reporting range of differential SS-RSRP and CSI-RSRP for L1 reporting and L3 reporting is defined from 0 dB to -30 dB with 2 dB resolution.

The mapping of measured quantity is defined in Table 4.7.8.0.2-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.4.3.2 and 10.1.6.

4.7.8.1 Intra-frequency CSI-RSRP measurement accuracy

4.7.8.1.1 EN-DC FR1 CSI-RSRP absolute measurement accuracy

4.7.8.1.1.1 Test purpose

The purpose of this test is to verify that the CSI-RSRP absolute measurement accuracy is within the specified limits for all bands.

4.7.8.1.1.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR EN-DC and CSI-RS based RSRP and RSRQ measurement.

4.7.8.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.8.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.8.1.

4.7.8.1.1.4 Test description

4.7.8.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.8.1.1.4.1-1.

Table 4.7.8.1.1.4.1-1: CSI-RSRP Intra frequency CSI-RSRP supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 4.7.8.1.1.4.1-2.

Table 4.7.8.1.1.4.1-2: Test Environment parameters for EN-DC CSI-RSRP Intra frequency measurement accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.8.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.8.1.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the target cell for CSI-RSRP measurements. The connection setup is done according to the settings in clause C.1.1.

4.7.8.1.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 4.7.8.1.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the CSI-RS reported values in the periodic MeasurementReport. The CSI-RS value of Cell 3 reported by the UE is compared to the expected CSI-RS. If the value is outside the limits in Table 4.7.8.1.5-2 and Table 4.7.8.1.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 4.7.8.1.5-1 as appropriate and repeat steps 5-7.

4.7.8.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.8.1.1.4.3-1: Common Exception messages EN-DC FR1 CSI-RSRP absolute measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-3 with Condition CSI-RS MOBILITY Table H.3.1-7 with Condition CSI-RS MOBILITY Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-8 with Condition CSI-RS RLM Table H.3.4-1 Table H.3.6-2 with conditions PERIODIC and CSI-RSRP
Specific message contents exceptions for Test Configuration 4.7.1.1.1.-1 and 4.7.1.1.1-4	Table H.3.1-3 with Condition SSB.1 FR1 and Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.7.1.1.1-2 and 4.7.1.1.1-5	Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.7.1.1.1-3 and 4.7.1.1.1-6	Table H.3.1-3 with Condition SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.8.1.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for EN-DC FR1 CSI-RSRP Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

4.7.8.1.1.5 Test requirement

Table 4.7.8.1.5-1 defines the primary level settings including test tolerances for all tests.

Each CSI-RSRP measurement report for each of the tests in Table 4.7.8.1.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.8.1.1.5-2 for test configuration 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 4.7.8.1.1.5-3 for test configuration 3 and 6.

Table 4.7.8.1.1.5-1: CSI-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1,4		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2,5		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3,6		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control Channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1,4		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2,5		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3,6		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD					
	Config 2,5		CSI-RS.RRM.FR1.1 TDD					
	Config 3,6		CSI-RS.RRM.FR1.2 TDD					
Time offset with Cell 2	Config 1,2,4,5	µs	-	4.7	-	4.7	-	4.7
	Config 3,6	µs	-	2.35	-	2.35	-	2.35
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3,5,6		SMTC.1					
OCNG Patterns			OP.1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								

EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	Depending on band group	dBm/15KhZ	-107.5		-88		-114Δ_{BG_offset}	
	Config 3,6	Depending on band group		Not applicable[Note 5]		-94		-114Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-107.5		-88		Same as Noc/15kHz	
	Config 3,6	Depending on band group		Not applicable[Note 5]		-91		-111 Δ_{BG_offset}	
$\hat{E}_s/I_{ot}$ for SSB			dB	1.89	-5.57	1.89	-5.57	-0.09	-5.56
$\hat{E}_s/I_{ot}$ for CSI-RS			dB	1.89	-5.57	1.89	-5.57	-0.09	-5.56
$\hat{E}_s/N_{oc}$ for SSB			dB	6	1.4	6	1.4	3	-0.8
$\hat{E}_s/N_{oc}$ for CSI-RS			dB	6	1.4	6	1.4	3	-0.8
CSI-RSRP[Note3]	Config 1,2,4,5	Depending on band group	dBm/SCS	-101.5	-106.1	-82	-86.6	-111.00 Δ_{BG_offset}	-114.00 Δ_{BG_offset}
	Config 3,6	Depending on band group		- Not applicable[Note 5]	Not applicable[Note 5]	-85	-89.6	-108.00 Δ_{BG_offset}	-111.00 Δ_{BG_offset}
Io[Note3]	Config 1,2,4,5	Depending on band group	dBm/9.36MHz	-71.68		-52.18		-82.39+Δ_{BG_offset}	
	Config 3,6	Depending on band group	dBm/38.16MHz	Not applicable[Note 5]		-51.91		-76.12+Δ_{BG_offset}	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 4.7.8.1.1.5-2: CSI-RSRP Intra-frequency absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest reported value (Cell 3)	44	60	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	36
			Bands NR_FDD_FR1_B	37
			Bands NR_TDD_FR1_C	37
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	38
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	38
			Bands NR_FDD_FR1_F	39
			Bands NR_FDD_FR1_G	39
			Bands NR_FDD_FR1_H	40

Highest reported value (Cell 3)	56	79	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	49
			Bands NR_FDD_FR1_B	49
			Bands NR_TDD_FR1_C	50
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	50
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	51
			Bands NR_FDD_FR1_F	51
			Bands NR_FDD_FR1_G	52
			Bands NR_FDD_FR1_H	52
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 3)	40	57	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	32
			Bands NR_FDD_FR1_B	32
			Bands NR_TDD_FR1_C	33
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	33
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	34
			Bands NR_FDD_FR1_F	34
			Bands NR_FDD_FR1_G	35
			Bands NR_FDD_FR1_H	35
Highest reported value (Cell 3)	61	82	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	53
			Bands NR_FDD_FR1_B	54
			Bands NR_TDD_FR1_C	54
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	55
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	55
			Bands NR_FDD_FR1_F	56
			Bands NR_FDD_FR1_G	56
			Bands NR_FDD_FR1_H	57
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.				

Table 4.7.8.1.1.5-3: CSI-RSRP Intra-frequency absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 3)	Not applicable	57	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	39
			Bands NR_FDD_FR1_B	40
			Bands NR_TDD_FR1_C	40
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	41
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	41
			Bands NR_FDD_FR1_F	40
			Bands NR_FDD_FR1_G	41
			Bands NR_FDD_FR1_H	41
Highest reported value (Cell 3)	Not applicable	76	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	52
			Bands NR_FDD_FR1_B	52
			Bands NR_TDD_FR1_C	53
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	53
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	54
			Bands NR_FDD_FR1_F	53
			Bands NR_FDD_FR1_G	53

For the test to pass, the ratio of

			Bands NR_FDD_FR1_H	54
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 3)	Not applicable	54	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	35
			Bands NR_FDD_FR1_B	35
			Bands NR_TDD_FR1_C	36
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	36
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	37
			Bands NR_FDD_FR1_F	37
			Bands NR_FDD_FR1_G	36
			Bands NR_FDD_FR1_H	37
Highest reported value (Cell 3)	Not applicable	79	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	56
			Bands NR_FDD_FR1_B	57
			Bands NR_TDD_FR1_C	57
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	58
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	58
			Bands NR_FDD_FR1_F	58
			Bands NR_FDD_FR1_G	58
			Bands NR_FDD_FR1_H	58
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.				

successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.8.1.2 EN-DC FR1 CSI-RSRP relative measurement accuracy

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Test applicability needs to be updated

4.7.8.1.2.1 Test purpose

The purpose of this test is to verify that the CSI-RSRP relative measurement accuracy is within the specified limits for all bands.

4.7.8.1.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR EN-DC and CSI-RS based RSRP and RSRQ measurement.

4.7.8.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.8.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.8.1.

4.7.8.1.2.4 Test description

4.7.8.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.8.1.2.4.1-1.

Table 4.7.8.1.2.4.1-1: CSI-RSRP Intra frequency CSI-RSRP supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode

2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 4.7.8.1.2.4.1-2.

Table 4.7.8.1.2.4.1-2: Test Environment parameters for EN-DC CSI-RSRP Intra frequency measurement accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.8.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.8.1.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the target cell for CSI-RSRP measurements. The connection setup is done according to the settings in clause C.1.1.

4.7.8.1.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 4.7.8.1.2.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the CSI-RSRP reported values of Cell 2 and Cell 3 in the periodic MeasurementReport. The CSI-RSRP value of Cell 3 reported by the UE is compared to the reported CSI-RSRP of Cell 2. If the resulting value is outside the limits in Table 4.7.8.1.2.5-2 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 4.7.8.1.2.5-1 as appropriate and repeat steps 5-7.

4.7.8.1.2.4.3 Message contents

Message contents are same as in clause 4.7.8.1.1.4.3.

4.7.8.1.2.5 Test requirement

Table 4.7.8.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Each CSI-RSRP measurement report for each of the tests in Table 4.7.8.1.2.5-1 shall meet the corresponding relative accuracy requirements in Table 4.7.8.1.2.5-2.

Table 4.7.8.1.2.5-1:

Same as Table 4.7.8.1.1.5-1 with the following exceptions: TBD

Table 4.7.8.1.2.5-2: CSI-RSRP Intra frequency relative accuracy requirements for the reported values

TBD

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.8.2 Inter-frequency measurement accuracy

4.7.8.2.1 EN-DC FR1 CSI-RSRP absolute measurement accuracy

4.7.8.2.1.1 Test purpose

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits for all bands.

4.7.8.2.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards.

4.7.8.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.8.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.8.2.

4.7.8.2.1.4 Test description

4.7.8.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.8.2.1.4.1-1.

Table 4.7.8.2.1.4.1-1: Applicable NR configurations for FR1 inter-frequency CSI-RSRP accuracy test

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations on each supported band	

Configure the test equipment and the DUT according to the parameters in Table 4.7.8.2.1.4.1-2.

Table 4.7.8.2.1.4.1-2: Test Environment parameters for EN-DC CSI-RSRP Inter-frequency measurement accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.8.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4.7.8.2.1.4.3.

2. In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 is the target cell for CSI-RSRP measurement. The connection setup is done according to the settings in clause C.1.1.

4.7.8.2.1.4.2 Test procedure

Same as in clause 4.7.8.1.1.4.2 but replacing Table 4.7.8.1.1.5-1, 4.7.8.1.1.5-2 and 4.7.8.1.1.5-3 with 4.7.8.2.1.5-1, 4.7.8.2.1.5-2 and 4.7.8.2.1.5-3, respectively.

4.7.8.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4.7.8.2.1.4.3-1: Common Exception messages for EN-DC FR1-FR1 CSI-RSRP absolute measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern#0
Specific message contents exceptions for Test Configuration 4.7.1.1.1.-1 and 4.7.1.1.1-4	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 4.7.1.1.1-2 and 4.7.1.1.1-5	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 4.7.1.1.1-3 and 4.7.1.1.1-6	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 4.7.8.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for EN-DC FR1-FR1 CSI-RSRP Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

4.7.8.2.1.5 Test requirement

Table 4.7.8.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each CSI-RSRP measurement report for each of the tests in Table 4.7.8.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 4.7.8.2.1.5-2 for test configuration 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 4.7.8.2.1.5-3 for test configuration 3 and 6.

Table 4.7.8.2.1.5-1: CSI-RSRP inter-frequency test parameters

Parameter	**Config**	**Unit**	**Test 1**		**Test 2**	
			Cell 2	**Cell 3**	**Cell 2**	**Cell 3**
SSB ARFCN	1~6		freq1	freq2	freq1	freq2
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2,5		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3,6		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Gap pattern ID			0		0	
Duplex mode	1,4		FDD		FDD	
	2,5		TDD		TDD	
	3,6		TDD		TDD	
TDD configuration	1,4		N/A		N/A	
	2,5		TDDConf.1.1		TDDConf.1.1	
	3,6		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	2,5		SR.1.1 TDD		SR.1.1 TDD	
	3,6		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
	2,5		CR.1.1 TDD	-	CR.1.1 TDD	-
	3,6		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2,5		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3,6		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1,4		SSB.1 FR1		SSB.1 FR1	
	2,5		SSB.1 FR1		SSB.1 FR1	
	3,6		SSB.2 FR1		SSB.2 FR1	
CSI-RS configuration for RRM	1,4		CSI-RS.RRM.FR1.1 FDD			
	2,5		CSI-RS.RRM.FR1.1 TDD			
	3,6		CSI-RS.RRM.FR1.2 TDD			

OCNG Patterns		1~6		OP.1		OP.1		
TRS configuration		1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	
		2,5		TRS.1.1 TDD		TRS.1.1 TDD		
		3,6		TRS.1.2 TDD		TRS.1.2 TDD		
Initial BWP Configuration		1~6		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		
Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1		
Time offset with Cell 2		1,2,4,5	µs	-	4.7	-	4.7	
		3,6	µs	-	2.35	-	2.35	
SMTC configuration		1,4		SMTC.2		SMTC.2		
		2,3,5,6		SMTC.1		SMTC.1		
EPRE ratio of PSS to SSS		1~6	dB	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH DMRS								
EPRE ratio of OCNG DMRS to SSSNote 1								
EPRE ratio of OCNG to OCNG DMRS Note 1								
N_{oc} Note2	Depending on band group	1,2,4,5	dBm/15 kHz	-94.65		(N_{oc} for Cell 3 +8dB)	-115+ Δ_{BG_offset}	
N_{oc} Note2	Depending on band group	3,6	dBm/15 kHz	-96		-96	-115+ Δ_{BG_offset}	
N_{oc} Note2	Depending on band group	1,2,4,5	dBm/SSB SCS	-94.65		(N_{oc} for Cell 3 +8dB)	-115+ Δ_{BG_offset}	
	Depending on band group	3,6		-93		(N_{oc} for C 3 +8dB)	-112.00+ Δ_{BG_offset}	
$\hat{E}_s/I_{ot}$ for SSB		1~6	dB	10	10	13	-3	
$\hat{E}_s/I_{ot}$ for CSI-RS		1~6	dB	10	10	13	-3	
CSI-RSRPNote3	Depending on band group	1,2,4,5	dBm/SCS	-84.65		(RSRP for Cell 3 +25dB)	-118.00+ Δ_{BG_offset}	
	Depending on band group	3,6		-83		(RSRP for Cell 3 +25dB)	-115.00+ Δ_{BG_offset}	
IoNote3	Depending on band group	1,2,4,5	dBm/ 9.36MHz	-56.28		(Io for Channel 3 +19.75dB)	-85.28+ Δ_{BG_offset}	
	Depending on band group	3,6	dBm/ 38.16MHz	-51.53		(Io for Channel 3 +19.75dB)	-79.19+ Δ_{BG_offset}	
$\hat{E}_s/N_{oc}$ for SSB		1~6	dB	10	10	13	-3	
$\hat{E}_s/I_{ot}$ for CSI-RS		1~6	dB	10	10	13	-3	
Propagation condition		1~6	-	AWGN		AWGN		
Antenna configuration				1x2		1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5 The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 4.7.8.2.1.5-2: CSI-RSRP Intra-frequency absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 3)	62	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	32
		Bands NR_FDD_FR1_B	33
		Bands NR_TDD_FR1_C	33
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	34
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	34
		Bands NR_FDD_FR1_F	35
		Bands NR_FDD_FR1_G	35
		Bands NR_FDD_FR1_H	36
Highest reported value (Cell 3)	81	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	45
		Bands NR_FDD_FR1_B	45
		Bands NR_TDD_FR1_C	46
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	46
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	47
		Bands NR_FDD_FR1_F	47
		Bands NR_FDD_FR1_G	48
		Bands NR_FDD_FR1_H	48
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 3)	59	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	28
		Bands NR_FDD_FR1_B	28
		Bands NR_TDD_FR1_C	29
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	29
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	30
		Bands NR_FDD_FR1_F	30
		Bands NR_FDD_FR1_G	31
		Bands NR_FDD_FR1_H	31
Highest reported value (Cell 3)	84	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	49
		Bands NR_FDD_FR1_B	50
		Bands NR_TDD_FR1_C	50
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	51
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	51
		Bands NR_FDD_FR1_F	52

		Bands NR_FDD_FR1_G	52
		Bands NR_FDD_FR1_H	53
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 4.7.8.2.1.5-3: CSI-RSRP Intra-frequency absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 3)	64	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	35
		Bands NR_FDD_FR1_B	36
		Bands NR_TDD_FR1_C	36
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	37
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	37
		Bands NR_FDD_FR1_F	38
		Bands NR_FDD_FR1_G	38
		Bands NR_FDD_FR1_H	39
Highest reported value (Cell 3)	83	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	48
		Bands NR_FDD_FR1_B	48
		Bands NR_TDD_FR1_C	49
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	49
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	50
		Bands NR_FDD_FR1_F	50
		Bands NR_FDD_FR1_G	51
		Bands NR_FDD_FR1_H	51
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 3)	61	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	31
		Bands NR_FDD_FR1_B	31
		Bands NR_TDD_FR1_C	32
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	32
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	33
		Bands NR_FDD_FR1_F	33
		Bands NR_FDD_FR1_G	34
		Bands NR_FDD_FR1_H	34
Highest reported value (Cell 3)	86	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	52
		Bands NR_FDD_FR1_B	53
		Bands NR_TDD_FR1_C	53
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	54
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	54
		Bands NR_FDD_FR1_F	55
		Bands NR_FDD_FR1_G	55
		Bands NR_FDD_FR1_H	56
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.8.2.2 EN-DC FR1 CSI-RSRP relative measurement accuracy

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Test applicability needs to be updated

4.7.8.2.2.1 Test purpose

The purpose of this test is to verify that the CSI-RSRP relative measurement accuracy is within the specified limits for all bands.

4.7.8.2.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR EN-DC and CSI-RS based RSRP and RSRQ measurement.

4.7.8.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.8.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.8.1.

4.7.8.2.2.4 Test description

4.7.8.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4.7.8.2.2.4.1-1.

Table 4.7.8.2.2.4.1-1: Applicable NR configurations for FR1 inter-frequency CSI-RSRP accuracy test

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations on each supported band	

Configure the test equipment and the DUT according to the parameters in Table 4.7.8.2.2.4.1-2.

Table 4.7.8.2.2.4.1-2: Test Environment parameters for EN-DC CSI-RSRP Inter-frequency measurement accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.8.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection	N/A		

diagram		

1. Message contents are defined in clause 4.7.8.2.2.4.3.
2. In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 is the target cell for CSI-RSRP measurement. The connection setup is done according to the settings in clause C.1.1.

4.7.8.2.2.4.2 Test procedure

Same as in clause 4.7.8.1.2.4.2 but replacing Table 4.7.8.1.2.5-1 and 4.7.8.1.2.5-2 with 4.7.8.2.2.5-1 and 4.7.8.2.2.5-2, respectively.

4.7.8.2.2.4.3 Message contents

Message contents are same as in clause 4.7.8.2.1.4.3.

4.7.8.2.2.5 Test requirement

Table 4.7.8.2.2.5-1 defines the primary level settings for all tests.

Each CSI-RSRP measurement report for each of the tests in Table 4.7.8.2.2.5-1 shall meet the corresponding relative accuracy requirements in Table 4.7.8.2.2.5-2.

Table 4.7.8.2.2.5-1: same as Table 4.7.8.2.1.5-1

TBD

Table 4.7.8.2.2.5-2: CSI-RSRP Inter frequency relative accuracy requirements for the reported values

TBD

4.7.9 CSI-RSRQ

4.7.9.0 Minimum conformance requirements

4.7.9.0.1 Intra-frequency CSI-RSRQ accuracy requirements

[TS 38.133, Clause 10.1.7.2 and Clause 10.1.11]

4.7.9.0.1.1 Absolute CSI-RSRQ accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the intra-frequency measurement defined in 9.10.2.1 in TS 38.133 [6] in FR1.

The accuracy requirements in Table 4.7.9.0.1.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 in TS 38.133 [6] for a corresponding Band for associated SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.12 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
    - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.9.0.1.1-1.

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

Table 4.7.9.0.1.1-1: CSI-RSRQ Intra frequency absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 1 range					
			NR operating band groups Note 3	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].

The reporting range of CSI-RSRQ measurement is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.9.0.1.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 4.7.9.0.1.1-2: CSI-RSRQ measurement report mapping

Reported value	Measured quantity value	Unit
CSI-RSRQ_0	CSI-RSRQ<-43	dB
CSI-RSRQ_1	-43≤ CSI-RSRQ<-42.5	dB
CSI-RSRQ_2	-42.5≤ CSI-RSRQ<-42	dB
CSI-RSRQ_3	-42≤ CSI-RSRQ<-41.5	dB
CSI-RSRQ_4	-41.5≤ CSI-RSRQ<-41	dB
..	..	…
CSI-RSRQ_122	17.5≤ CSI-RSRQ<18	dB
CSI-RSRQ_123	18≤ CSI-RSRQ<18.5	dB
CSI-RSRQ_124	18.5≤ CSI-RSRQ<19	dB
CSI-RSRQ_125	19≤ CSI-RSRQ<19.5	dB
CSI-RSRQ_126	19.5≤ CSI-RSRQ<20	dB
CSI-RSRQ_127	20 ≤ CSI-RSRQ	dB

4.7.9.0.2 Inter-frequency CSI-RSRQ accuracy requirements

[TS 38.133, Clause 10.1.9.2 and Clause 10.1.11]

4.7.9.0.2.1 Absolute CSI-RSRQ accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the inter-frequency measurement defined in 9.10.3.1 in TS 38.133 [6] in FR1.

The accuracy requirements in Table 4.7.9.0.2.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 in TS 38.133 [6] for a corresponding Band for associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.9.0.2.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 4.7.9.0.2.1-1: CSI-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io [Note 1] range					
			NR operating band groups [Note 3]	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].

The reporting range of CSI-RSRQ measurement is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.9.0.2.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 4.7.9.0.2.1-2: CSI-RSRQ measurement report mapping

Reported value	Measured quantity value	Unit
CSI-RSRQ_0	CSI-RSRQ<-43	dB
CSI-RSRQ_1	-43≤ CSI-RSRQ<-42.5	dB
CSI-RSRQ_2	-42.5≤ CSI-RSRQ<-42	dB
CSI-RSRQ_3	-42≤ CSI-RSRQ<-41.5	dB
CSI-RSRQ_4	-41.5≤ CSI-RSRQ<-41	dB
..	..	…
CSI-RSRQ_122	17.5≤ CSI-RSRQ<18	dB
CSI-RSRQ_123	18≤ CSI-RSRQ<18.5	dB
CSI-RSRQ_124	18.5≤ CSI-RSRQ<19	dB
CSI-RSRQ_125	19≤ CSI-RSRQ<19.5	dB
CSI-RSRQ_126	19.5≤ CSI-RSRQ<20	dB
CSI-RSRQ_127	20 ≤ CSI-RSRQ	dB

4.7.9.0.2.2 Relative CSI-RSRQ accuracy

The relative accuracy of CSI-RSRQ is defined as the CSI-RSRQ measured from one cell compared to the CSI-RSRQ measured from another cell with the same center frequency, or between any two CSI-RSRQ levels measured on the same cell in FR1.

The accuracy requirements in Table 4.7.9.0.2.2-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 in TS 38.133 [6] for a corresponding Band for the associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.9.0.2.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 4.7.9.0.2.2-1: CSI-RSRQ Inter frequency relative accuracy in FR1

Accuracy		**Conditions**						
Normal condition	**Extreme condition**	**CSI-RS Ês/Iot** Note 2	**Io** Note 1 **range**					
			NR operating band groups Note 4	**Minimum Io**				**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{CSI-RS}**			**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{CSI-RS} = 15 kHz	**SCS_{CSI-RS} = 30 kHz**	**SCS_{CSI-RS} = 60 kHz**		
			NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50

±3	±4	≥-3	NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
±4	±4	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].								

4.7.9.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing

4.7.9.1.1 Test purpose

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.2 in TS 38.133 [6].

4.7.9.1.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR EN-DC and CSI-RS based RSRP and RSRQ measurements.

4.7.9.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 4.7.9.0.1.

The normative reference for this requirement is in TS 38.133 [6] A.4.7.9.1.

4.7.9.1.4 Test description

4.7.9.1.4.1 Initial conditions

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table 4.7.9.1.4.1-1.

Table 4.7.9.1.4.1-1: CSI-RSRQ Intra frequency CSI-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB and CSI-RS SCS, 40MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB and CSI-RS SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 4.7.9.1.4.1-2.

Table 4.7.9.1.4.1-2: Initial conditions for CSI-RSRQ intra frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] Clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1, Table E.2-1 and TS 38.508-1 [14] Clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.9.1.4.1-1.		
Propagation conditions	AWGN		As specified in Clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in Clause 4.7.9.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup, which is specified in Clause A.3.7.2.1 in TS 38.133 [6]. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the target cell for CSI-RSRQ measurements. The connection setup is done according to the settings in Clause C.1.3.

4.7.9.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 4.7.9.1.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the CSI-RSRQ reported values in the periodic MeasurementReport. The CSI-RSRQ value of Cell 3 reported by the UE is compared to the expected CSI-RSRQ. If the value is outside the limits (determined by Table 4.7.9.0.1.1-1, Table 4.7.9.0.1.1-2) or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 4.7.9.1.5-1 as appropriate and repeat steps 5-7.

4.7.9.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 4.7.9.1.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition CSI-RS MOBILITY and RSRQ Table H.3.4-1a Table H.3.4-2

Table 4.7.9.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			

4.7.9.1.5 Test Requirements

The absolute accuracy of CSI-RSRQ intra-frequency measurement is tested by using the parameters in Table 4.7.9.1.5-1. The CSI-RSRQ measurement accuracy shall fulfil the requirements in Clause 4.7.9.0.1.

Table 4.7.9.1.5-1: CSI-RSRQ Intra frequency test parameters

Parameter		**Unit**	**Test 1**		**Test 2**		**Test 3**	
			Cell 2	**Cell 3**	**Cell 2**	**Cell 3**	**Cell 2**	**Cell 3**
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.		TRS.1.1		TRS.1.1	

				1 TDD		TDD		TDD	
		Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OP. 1					
Time offset with Cell 2		Config 1,2,4,5	µs	-	4.7	-	4.7	-	4.7
		Config 3,6	µs	-	2.35	-	2.35	-	2.35
SMTC configuration		Config 1,4		SMTC.2					
		Config 2,3,5,6		SMTC.1					
SSB configuration		Config 1,2,4,5		SSB.1 FR1					
		Config 3,6		SSB.2 FR1					
CSI-RS configuration for RRM		Config 1,4		CSI-RS.RRM.FR1.1 FDD					
		Config 2, 5		CSI-RS.RRM.FR1.1 TDD					
		Config 3, 6		CSI-RS.RRM.FR1.2 TDD					
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15 kHz					
		Config 3,6		30kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/15kHz	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-91		-		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/SCS	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-88		-		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D,						-109.5	

		NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s / I_{ot}$			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
CSI-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/SCS	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5
		NR_TDD_FR1_C						-117	-117
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116
		NR_FDD_FR1_F						-115.5	-115.5
		NR_FDD_FR1_G						-115	-115
		NR_FDD_FR1_H						-114.5	-114.5
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-85	-85	-	-	-115	-115
		NR_FDD_FR1_B						-114.5	-114.5
		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5
CSI-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/ 9.36MHz	-50		-70		-83.5	
		NR_FDD_FR1_B						-83	
		NR_TDD_FR1_C						-82.5	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-82	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-81.5	
		NR_FDD_FR1_F						-81	
		NR_FDD_FR1_G						-80.5	
		NR_FDD_FR1_H						-80	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/ 38.16MHz	-50		-		-77.4	
		NR_FDD_FR1_B						-76.9	
		NR_TDD_FR1_C						-76.4	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-75.9	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-75.4	

		NR_FDD_FR1_F						-74.9	
		NR_FDD_FR1_G						-74.4	
		NR_FDD_FR1_H						-73.9	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									
Note 3: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									
Note 4: CSI-RSRQ, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.									
Note 5: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6].									
Note 6: Subtest 2 is not used when testing with 30kHz SSB and CSI-RS SCS.									
Note 7: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.									

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.9.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing

4.7.9.2.1 Test purpose

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.9. 2 in TS 38.133 [6] for inter frequency measurement.

4.7.9.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR EN-DC and CSI-RS based RSRP and RSRQ measurements.

4.7.9.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 4.7.9.0.2.

The normative reference for this requirement is in TS 38.133 [6] A.4.7.9.2.

4.7.9.2.4 Test description

4.7.9.2.4.1 Initial conditions

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table 4.7.9.2.4.1-1.

Table 4.7.9.2.4.1-1: CSI-RSRQ Inter frequency CSI-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 4.7.9.2.4.1-2.

Table 4.7.9.2.4.1-2: Initial conditions for CSI-RSRQ inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] Clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.2, Table E.2-1 and TS 38.508-1 [14] Clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.9.2.4.1-1.		
Propagation conditions	AWGN		As specified in Clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in Clause 4.7.9.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup, which is specified in Clause A.3.7.2.1 in TS 38.133 [6]. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in two different FR1 frequencies. Cell 2 is the PSCell and Cell 3 is the target cell for CSI-RSRQ measurements. The connection setup is done according to the settings in Clause C.1.3.

4.7.9.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 4.7.9.2.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the CSI-RSRQ reported values in the periodic MeasurementReport. The CSI-RSRQ value of Cell 3 reported by the UE is compared to the expected CSI-RSRQ. If the value is outside the limits (determined by Table 4.7.9.0.2.1-1, Table 4.7.9.0.2.1-2) or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 4.7.9.2.5-1 as appropriate and repeat steps 5-7.

4.7.9.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 4.7.9.2.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ, CSI-RS MOBILITY and RSRQ Table H.3.4-1a with condition GAP_NEEDED Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0

Table 4.7.9.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
maxReportCells	2		
}			
}			
}			

4.7.9.2.5 Test Requirements

Both absolute accuracy and relative accuracy requirements of CSI-RSRQ inter-frequency measurement are tested by using test parameters in Table 4.7.9.2.5-1. The CSI-RSRQ measurement accuracy shall fulfil the requirements in Clause 4.7.9.0.2.

Table 4.7.9.2.5-1: CSI-RSRQ Inter frequency test parameters

Parameter		**Unit**	**Test 1**		**Test 2**		**Test 3**	
			Cell 2	**Cell 3**	**Cell 2**	**Cell 3**	**Cell 2**	**Cell 3**
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2,5		10: $N_{RB,c}$ = 52					
	Config 3,6		40: $N_{RB,c}$ = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	

RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD					
	Config 2,5		CSI-RS.RRM.FR1.1 TDD					
	Config 3,6		CSI-RS.RRM.FR1.2 TDD					
OCNG Patterns			OCNG pattern 1					
Time offset with Cell 2	Config 1,2,4,5	µs	-	4.7	-	4.7	-	4.7
	Config 3,6	µs	-	2.35	-	2.35	-	2.35
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3,5,6		SMTC.1					
SSB configuration	Config 1,2,4,5		SSB.1 FR1					
	Config 3,6		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30 kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/15 kHz	-80.18	-80.18	-106	-106	-116	-116
		NR_FDD_FR1_B						-115.5	-115.5
		NR_TDD_FR1_C						-115	-115
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	-114.5
		NR_FDD_FR1_E						-114	-114

		NR_TDD_FR1_E							
		NR_FDD_FR1_G						-113	-113
		NR_FDD_FR1_H						-112.5	-112.5
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/15 kHz	-86.27	-86.27	-113	-113	-116	-116
		NR_FDD_FR1_B						-115.5	-115.5
		NR_TDD_FR1_C						-115	-115
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	-114.5
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	-114
		NR_FDD_FR1_G						-113	-113
		NR_FDD_FR1_H						-112.5	-112.5
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/SCS	-80.18	-80.18	-106	-106	-116	-116
		NR_FDD_FR1_B						-115.5	-115.5
		NR_TDD_FR1_C						-115	-115
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5	-114.5
		NR_FDD_FR1_E NR_TDD_FR1_E						-114	-114
		NR_FDD_FR1_G						-113	-113
		NR_FDD_FR1_H						-112.5	-112.5
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A		-83.27	-83.27	-110	-110	-113	-113
		NR_FDD_FR1_B						-112.5	-112.5
		NR_TDD_FR1_C						-112	-112
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-111.5
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-111
		NR_FDD_FR1_G						-110	-110
		NR_FDD_FR1_H						-109.5	-109.5
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
CSI-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/SCS	-81.93	-81.93	-107.75	-107.75	-113	-117.75
		NR_FDD_FR1_B						-112.5	-117.25
		NR_TDD_FR1_C						-112	-116.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-116.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-115.75
		NR_FDD_FR1_G						-110	-114.75
		NR_FDD_FR1_H						-109.5	-114.25
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A		-85.02	-85.02	-111.75	-111.75	-110	-114.75
		NR_FDD_FR1_B						-109.5	-114.25
		NR_TDD_FR1_C						-109	-113.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-108.5	-113.25

		NR_FDD_FR1_E NR_TDD_FR1_E						-108	-112.75
		NR_FDD_FR1_G						-107	-111.75
		NR_FDD_FR1_H						-106.5	-111.25
CSI-RSRQ Note3		NR_FDD_FR1_A NR_TDD_FR1_A	dB	-14.77	-14.77	-40.59	-40.59	-12.56	-14.76
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/ 9.36MHz	-50	-50	-75.83	-75.83	-83.28	-85.83
		NR_FDD_FR1_B						-82.78	-85.33
		NR_TDD_FR1_C						-82.28	-84.83
		NR_FDD_FR1_D NR_TDD_FR1_D						-81.78	-84.33
		NR_FDD_FR1_E NR_TDD_FR1_E						-81.28	-83.83
		NR_FDD_FR1_G						-80.28	-82.83
		NR_FDD_FR1_H						-79.78	-82.33
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	dBm/ 38.16MHz	-50	-50	-76.73	-76.73	-77.19	-79.73
		NR_FDD_FR1_B						-76.69	-79.23
		NR_TDD_FR1_C						-76.19	-78.73
		NR_FDD_FR1_D NR_TDD_FR1_D						-75.69	-78.23
		NR_FDD_FR1_E NR_TDD_FR1_E						-75.19	-77.73
		NR_FDD_FR1_G						-74.19	-76.73
		NR_FDD_FR1_H						-73.69	-76.53
Propagation condition				AWGN	AWGN	AWGN	AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: CSI-RSRQ, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Section 3.5.2 in TS 38.133 [6].

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.10 CSI-SINR

4.7.10.0 Minimum conformance requirements

4.7.10.0.1 Intra-frequency CSI-SINR accuracy requirements in FR1

[TS 38.133, Clause 10.1.12.2 and Clause 10.1.16]

4.7.10.0.1.1 Absolute CSI-SINR accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 4.7.10.0.1.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.12 in TS 38.133 [6] for a corresponding Band.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for intra-frequency measurement is serving cell timing.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.10.0.1.1-1.

Table 4.7.10.0.1.1-1: CSI-SINR Intra frequency absolute accuracy in FR1

Accuracy		Conditions						
			Io [Note 1] range					
Normal condition	Extreme condition	CSI-RS Ês/Iot	NR operating band groups	Minimum Io				Maximum Io
				dBm / SCS			dBm/BW Channel	dBm/BW Channel
				SCS (kHz)				
dB	dB	dB		15	30	60		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].
NOTE 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

The reporting range of CSI-SINR for reporting is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.10.0.1.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 4.7.10.0.1.1-2: CSI-SINR measurement report mapping

Reported value	Measured quantity value	Unit
CSI-SINR_0	CSI-SINR <-23	dB
CSI-SINR_1	-23≤ CSI-SINR <-22.5	dB
CSI-SINR_2	-22.5≤ CSI-SINR <-22	dB
CSI-SINR_3	-22≤ CSI-SINR <-21.5	dB
CSI-SINR_4	-21.5≤ CSI-SINR <-21	dB
..	..	…
CSI-SINR_123	38≤ CSI-SINR <38.5	dB
CSI-SINR_124	38.5≤ CSI-SINR <39	dB
CSI-SINR_125	39≤ CSI-SINR <39.5	dB
CSI-SINR_126	39.5≤ CSI-SINR <40	dB
CSI-SINR_127	40≤ CSI-SINR	dB

4.7.10.0.2 Inter-frequency CSI-SINR accuracy requirements in FR1

[TS 38.133, Clause 10.1.14.2 and Clause 10.1.16]

4.7.10.0.2.1 Absolute accuracy of CSI-SINR in FR1

The requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 4.7.10.0.2.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.10.0.2.1-1.

Table 4.7.10.0.2.1-1: CSI-SINR Inter frequency absolute accuracy in FR1

Accuracy		Conditions						
			Io [Note 1] range					
Normal condition	Extreme condition	CSI-RS Ês/Iot	NR operating band groups	Minimum Io				Maximum Io
				dBm / SCS			dBm/BW Channel	dBm/BW Channel
				SCS (kHz)				
				15	30	60		
dB	dB	dB						
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70

			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].
NOTE 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

The reporting range of CSI-SINR for reporting is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.10.0.2.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 4.7.10.0.2.1-2: CSI-SINR measurement report mapping

Reported value	Measured quantity value	Unit
CSI-SINR_0	CSI-SINR <-23	dB
CSI-SINR_1	-23≤ CSI-SINR <-22.5	dB
CSI-SINR_2	-22.5≤ CSI-SINR <-22	dB
CSI-SINR_3	-22≤ CSI-SINR <-21.5	dB
CSI-SINR_4	-21.5≤ CSI-SINR <-21	dB
..	..	…
CSI-SINR_123	38≤ CSI-SINR <38.5	dB
CSI-SINR_124	38.5≤ CSI-SINR <39	dB
CSI-SINR_125	39≤ CSI-SINR <39.5	dB
CSI-SINR_126	39.5≤ CSI-SINR <40	dB
CSI-SINR_127	40≤ CSI-SINR	dB

4.7.10.0.2.2 Relative accuracy of CSI-SINR in FR1

The relative accuracy of CSI-SINR in inter frequency case is defined as the CSI-SINR measured from one cell on a frequency in FR1 compared to the CSI-SINR measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 4.7.10.0.2.2-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band.
- $|CSI_RP1_{dBm} - CSI_RP2_{dBm}| \leq 27$ dB
- | Channel 1_Io -Channel 2_Io | ≤ 20 dB
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 4.7.10.0.2.2-1.

Table 4.7.10.0.2.2-1: CSI-SINR Inter frequency relative accuracy in FR1

Accuracy		Conditions						
			Io Note 1 range					
Normal condition	Extreme condition	CSI-RS Ês/Iot Note 3	NR operating band groups	Minimum Io				Maximum Io
				dBm / SCS			dBm/BW	
				SCS (kHz)				
dB	dB	dB		15	30	60	Channel	Channel
±3.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±4	±4	≥-6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.
NOTE 4: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].
NOTE 5: The requirements apply for CSI-RS Ês/Iot ≤ XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

4.7.10.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing

4.7.10.1.1 Test purpose

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.12 in TS 38.133 [6].

4.7.10.1.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR EN-DC, which support CSI-RS based SINR measurements.

4.7.10.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 4.7.10.0.1.

The normative reference for this requirement is in TS 38.133 [6] A.4.7.10.1.

4.7.10.1.4 Test description

4.7.10.1.4.1 Initial conditions

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table 4.7.10.1.4.1-1.

Table 4.7.10.1.4.1-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 4.7.10.1.4.1-2.

Table 4.7.10.1.4.1-2: Initial conditions for CSI-SINR intra frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] Clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1, Table E.2-1 and TS 38.508-1 [14] Clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.10.1.4.1-1.		
Propagation conditions	AWGN		As specified in Clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in Clause 4.7.10.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup, which is specified in Clause A.3.7.2.1 in TS 38.133 [6]. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the target cell for CSI-SINR measurements. CSI-RS for mobility configured for Cell 2 is associated to the SSB of Cell 2, and CSI-RS for mobility configured for Cell 3 is associated to the SSB of Cell 3. The connection setup is done according to the settings in Clause C.1.3.

4.7.10.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 4.7.10.1.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the CSI-SINR reported values in the periodic MeasurementReport. The CSI-SINR value of Cell 3 reported by the UE is compared to the expected CSI-SINR. If the value is outside the limits (determined by Table 4.7.10.0.1.1-1, Table 4.7.10.0.1.1-2) or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 4.7.10.1.5-1 as appropriate and repeat steps 5-7.

4.7.10.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 4.7.10.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition CSI-RS MOBILITY and SINR Table H.3.4-1a Table H.3.4-2

Table 4.7.10.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

4.7.10.1.5 Test Requirements

The absolute accuracy of CSI-SINR intra-frequency measurement is tested by using the parameters in Table 4.7.10.1.5-1. The CSI-SINR measurement accuracy shall fulfil the requirements in Clause 4.7.10.0.1.

Table 4.7.10.1.5-1: CSI-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			

Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1, 4		TRS.1.1 FDD			
	Config 2, 5		TRS.1.1 TDD			
	Config 3, 6		TRS.1.2 TDD			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
Time offset with Cell 2	Config 1,2,4,5	µs	2.35	2.35	2.35	2.35
	Config 3.6	µs	1.17	1.17	1.17	1.17
SMTC configuration	Config 1,4		SMTC.2			
	Config 2,3,5,6		SMTC.1			
SSB configuration	Config 1,2,4,5		SSB.1 FR1			
	Config 3,6		SSB.2 FR1			
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD			
	Config 2,5		CSI-RS.RRM.FR1.1 TDD			
	Config 3,6		CSI-RS.RRM.FR1.2 TDD			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15			
	Config 3,6		30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm /15kHz	-93		-116	
	NR_FDD_FR1_B				-115.5	
	NR_TDD_FR1_C				-115	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-114	
	NR_FDD_FR1_F				-113.5	
	NR_FDD_FR1_G				-113	
	NR_FDD_FR1_H				-112.5	
N_{oc} Note2	Config 1,2,4,5	dBm /SCS	-93		Same as Noc for 15kHz	
	Config 3,6 NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90		-113	
	NR_FDD_FR1_B				-112.5	

		NR_TDD_FR1_C				-112	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-111.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-111	
		NR_FDD_FR1_F				-110.5	
		NR_FDD_FR1_G				-110	
		NR_FDD_FR1_H				-109.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
CSI-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117
		NR_FDD_FR1_B				-116.5	-116.5
		NR_TDD_FR1_C				-116	-116
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115
		NR_FDD_FR1_F				-114.5	-114.5
		NR_FDD_FR1_G				-114	-114
		NR_FDD_FR1_H				-113.5	-113.5
CSI-SINR Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					
		NR_FDD_FR1_D, NR_TDD_FR1_D					
		NR_FDD_FR1_E, NR_TDD_FR1_E					
		NR_FDD_FR1_F					
		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/9.36MHz	-57.5		-85.51	
		NR_FDD_FR1_B				-85.01	
		NR_TDD_FR1_C				-84.51	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-84.01	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-83.51	
		NR_FDD_FR1_F				-83.01	
		NR_FDD_FR1_G				-82.51	
		NR_FDD_FR1_H				-82.01	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/38.16MHz	-51.41		-79.41	
		NR_FDD_FR1_B				-78.91	
		NR_TDD_FR1_C				-78.41	

		NR_FDD_FR1_D, NR_TDD_FR1_D			-77.91
		NR_FDD_FR1_E, NR_TDD_FR1_E			-77.41
		NR_FDD_FR1_F			-76.91
		NR_FDD_FR1_G			-76.41
		NR_FDD_FR1_H			-75.91
Propagation condition			-	AWGN	
Antenna configuration			-	1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6]. Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.10.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing

4.7.10.2.1 Test purpose

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.14.2 in TS 38.133 [6] for inter-frequency measurement.

4.7.10.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR EN-DC, which supports CSI-RS based SINR measurements.

4.7.10.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 4.7.10.0.2.

The normative reference for this requirement is in TS 38.133 [6] A.4.7.10.2.

4.7.10.2.4 Test description

4.7.10.2.4.1 Initial conditions

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table 4.7.10.2.4.1-1.

Table 4.7.10.2.4.1-1: CSI-SINR Inter frequency CSI-SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode

4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 4.7.10.2.4.1-2.

Table 4.7.10.2.4.1-2: Initial conditions for CSI-SINR inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] Clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.2, Table E.2-1 and TS 38.508-1 [14] Clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.10.2.4.1-1.		
Propagation conditions	AWGN		As specified in Clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in Clause 4.7.10.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup, which is specified in Clause A.3.7.2.1 in TS 38.133 [6]. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the target cell for CSI-SINR measurements. CSI-RS for mobility configured for Cell 2 is associated to the SSB of Cell 2, and CSI-RS for mobility configured for Cell 3 is associated to the SSB of Cell 3. The connection setup is done according to the settings in Clause C.1.3.

4.7.10.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 4.7.10.2.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the CSI-SINR reported values in the periodic MeasurementReport. The CSI-SINR value of Cell 3 reported by the UE is compared to the expected CSI-SINR. If the value is outside the limits (determined by Table 4.7.10.0.2.1-1 and 4.7.10.0.2.1-2) or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 4.7.10.2.5-1 as appropriate and repeat steps 5-7.

4.7.10.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 4.7.10.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ, CSI-RS MOBILITY and SINR Table H.3.4-1a with condition GAP_NEEDED Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0

Table 4.7.10.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

4.7.10.2.5 Test Requirements

Both absolute accuracy and relative accuracy requirements of CSI-SINR inter-frequency measurement are tested by using test parameters in Table 4.7.10.2.5-1. CSI-RS for mobility configured for Cell 2 is associated to the SSB of Cell 2, and CSI-RS for mobility configured for Cell 3 is associated to the SSB of Cell 3.

The CSI-SINR measurement accuracy shall fulfil the requirements in Clause 4.7.10.0.2.

Table 4.7.10.2.5-1: CSI-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			**freq1**	**freq2**	**freq1**	**freq2**	**freq1**	**freq2**
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					

DRX Cycle configuration			ms	Not Applicable							
TRS configuration	Config 1, 4			TRS.1.1 FDD							
	Config 2, 5			TRS.1.1 TDD							
	Config 3, 6			TRS.1.2 TDD							
PDSCH Reference measurement channel	Config 1,4			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-		
	Config 2,5			SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD			
	Config 3,6			SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD			
RMSI CORESET Reference Channel	Config 1,4			CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-		
	Config 2,5			CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD			
	Config 3,6			CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD			
Dedicated CORESET Reference Channel	Config 1,4			CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-		
	Config 2,5			CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD			
	Config 3,6			CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD			
OCNG Patterns				OP.1							
SS-RSSI-Measurement				Not Applicable							
Time offset with Cell 2	Config 1,2,4,5		µs	-	2.35	-	2.35	-	2.35		
	Config 3,6		µs	-	1.17	-	1.17	-	1.17		
SMTC configuration	Config 1,4			SMTC.2							
	Config 2,3,5,6			SMTC.1							
SSB configuration	Config 1,2,4,5			SSB.1 FR1							
	Config 3,6			SSB.2 FR1							
CSI-RS configuration for RRM	Config 1,4			CSI-RS.RRM.FR1.1 FDD							
	Config 2,5			CSI-RS.RRM.FR1.1 TDD							
	Config 3,6			CSI-RS.RRM.FR1.2 TDD							
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5		kHz	15							
	Config 3,6			30							
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0		
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS (Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-88		-108.5		-119.5			
		NR_FDD_FR1_B						-119			
		NR_TDD_FR1_C						-118.5			
		NR_FDD_FR1_D NR_TDD_FR1_D						-118			
		NR_FDD_FR1_E NR_TDD_FR1_E						-117.5			
		NR_FDD_FR1_F						-117			
		NR_FDD_FR1_G						-116.5			

		NR_FDD_FR1_H				-116
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-88	-108.5	Same as Noc for 15kHz
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85	-105.5	-116.5
		NR_FDD_FR1_B				-116
		NR_TDD_FR1_C				-115.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-115
		NR_FDD_FR1_E NR_TDD_FR1_E				-114.5
		NR_FDD_FR1_F				-114
		NR_FDD_FR1_G				-114.5
		NR_FDD_FR1_H				-113
$\hat{E}_s / I_{ot}$			dB	-1.75	20	-4.0
$\hat{E}_s / N_{oc}$			dB	-1.75	20	-4.0
CSI-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75	-88.5	-123.5
		NR_FDD_FR1_B				-123
		NR_TDD_FR1_C				-122.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-122
		NR_FDD_FR1_E NR_TDD_FR1_E				-121.5
		NR_FDD_FR1_F				-121
		NR_FDD_FR1_G				-120.5
		NR_FDD_FR1_H				-120
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-86.75	-85.5	-120.5
		NR_FDD_FR1_B				-120
		NR_TDD_FR1_C				-119.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-119
		NR_FDD_FR1_E NR_TDD_FR1_E				-118.5
		NR_FDD_FR1_F				-118
		NR_FDD_FR1_G				-117.5
		NR_FDD_FR1_H				-117
CSI-SINR Note3		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75	20	-4.0
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D NR_TDD_FR1_D				
		NR_FDD_FR1_E NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io Note3	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.83	-60.5	-90.09
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D NR_TDD_FR1_D				-88.59
		NR_FDD_FR1_E NR_TDD_FR1_E				-88.09
		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
	Config 3,6	NR_FDD_FR1_A	dBm/	-51.73	-54.41	-84

		NR_TDD_FR1_A NOTE 6	38.16MHz			
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D NR_TDD_FR1_D				-82.5
		NR_FDD_FR1_E NR_TDD_FR1_E				-82
		NR_FDD_FR1_F				-81.5
		NR_FDD_FR1_G				-81
		NR_FDD_FR1_H				-80.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6].
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

4.7.11 TDCP amplitude measurement accuracy

4.7.11.0 Minimum conformance requirements

4.7.11.0.1 TDCP amplitude measurement accuracy requirements in FR1

[38.133 clause 10.1.42]

The reporting range of TDCP amplitude is defined from 0 to 1. The reporting range of TDCP phase is 0 to 2π. The mapping of measured quantity is defined in Tables 4.7.11.0.1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 4.7.11.0.1: TDCP amplitude measurement report mapping

Reported value	Measured quantity value
TDCP_0	$1 - \frac{1}{128\sqrt{2}} < \text{TDCP} \leq 1$
TDCP_1	$1 - \frac{1}{128} < \text{TDCP} \leq 1 - \frac{1}{128\sqrt{2}}$
TDCP_2	$1 - \frac{1}{64\sqrt{2}} < \text{TDCP} \leq 1 - \frac{1}{128}$
TDCP_3	$1 - \frac{1}{64} < \text{TDCP} \leq 1 - \frac{1}{64\sqrt{2}}$
TDCP_4	$1 - \frac{1}{32\sqrt{2}} < \text{TDCP} \leq 1 - \frac{1}{64}$
TDCP_5	$1 - \frac{1}{32} < \text{TDCP} \leq 1 - \frac{1}{32\sqrt{2}}$
TDCP_6	$1 - \frac{1}{16\sqrt{2}} < \text{TDCP} \leq 1 - \frac{1}{32}$
TDCP_7	$1 - \frac{1}{16} < \text{TDCP} \leq 1 - \frac{1}{16\sqrt{2}}$
TDCP_8	$1 - \frac{1}{8\sqrt{2}} < \text{TDCP} \leq 1 - \frac{1}{16}$
TDCP_9	$1 - \frac{1}{8} < \text{TDCP} \leq 1 - \frac{1}{8\sqrt{2}}$
TDCP_10	$1 - \frac{1}{4\sqrt{2}} < \text{TDCP} \leq 1 - \frac{1}{8}$
TDCP_11	$1 - \frac{1}{4} < \text{TDCP} \leq 1 - \frac{1}{4\sqrt{2}}$

TDCP_12	$1-\frac{1}{2\sqrt{2}} < TDCP \leq 1-\frac{1}{4}$
TDCP_13	$1-\frac{1}{2} < TDCP \leq 1-\frac{1}{2\sqrt{2}}$
TDCP_14	$1-\frac{1}{\sqrt{2}} < TDCP \leq 1-\frac{1}{2}$
TDCP_15	$0 \leq TDCP \leq 1-\frac{1}{\sqrt{2}}$

4.7.11.1 TDCP amplitude measurement accuracy in EN-DC

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing
- test case applicability is missing

4.7.11.1.1 Test purpose

The purpose of this test is to verify that the TRS based TDCP amplitude measurement accuracy is within the specified limits in the test requirements section Clause 10.1.42 of TS 38.133. The configurations for the test are specified in Table 4.7.11.1.1-1.

4.7.11.1.2 Test applicability

This test applies to all types of NR UE Rel-18 and forward supporting NR EN-DC, which supports T based SINR measurements.

4.7.11.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 4.7.11.0.2.

The normative reference for this requirement is in TS 38.133 [6] A.4.7.11.2.

4.7.11.1.4 Test description

4.7.11.1.4.1 Initial conditions

The test consists of two tests, Test 1 and Test 2. Each test further consists of two subtests Test 1A, 1B and Test 2A, 2B.

Test 1A: 10 Hz doppler + 15kHz SCS FDD + 20dB SNR

Test 1B: 300 Hz doppler + 15kHz SCS FDD + 10 dB SNR

Test 2A: 10 Hz doppler + 30kHz SCS TDD + 20 dB SNR

Test 2B: 300 Hz doppler + 30kHz SCS TDD + 10 dB SNR

Relevant parameters for each test are provided in the table 4.7.11.1.2-1. UE needs to pass Test 1A, 1B, 2A, 2B.

Table 4.7.11.1.4-1: Applicable NR configurations for FR1 TRS based TDCP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 4.7.11.1.4.1-2.

Table 4.7.11.1.4.1-2: Initial conditions for CSI-SINR inter frequency accuracy in FR1

Parameter	Value	Comment

Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] Clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.2, Table E.2-1 and TS 38.508-1 [14] Clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.10.2.4.1-1.		
Propagation conditions	AWGN		As specified in Clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

4.7.11.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 4.7.11.1.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the TDCP reported index in the periodic MeasurementReport. The TDCP reported index of Cell 2 reported by the UE is compared to the expected TDCP reported index. If the value is outside the limits (determined by Table 4.7.11.0.1-1) or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 4.7.11.1.5-1 as appropriate and repeat steps 5-7.

4.7.11.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 4.7.11.1.4.3-1: CSI-ReportConfig

Derivation Path: TS 38.508[14] Table 7.3.1-12F			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig ::= CHOICE {			
slots5	0		SCS15kHz_FDD
slots5	2		SCS15kHz_TDD
}			
pucch-CSI-ResourceList SEQUENCE (SIZE (1..maxNrofBWPs)) OF{			
PUCCH_CSI_Resource[0] SEQUENCE {			
uplinkBandwidthPartId	BWP-Id		

pucch_Resource	9		
}			
}			
}			
}			
reportQuantity-r18	TDCP-r18		
}			

4.7.11.1.5 Test Requirements

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in Clause A.3.7.2 of TS38.133. The test parameters for the Cell 2 are given in Table 4.7.11.1.5-1. Amplitude of TDCP is tested by using the parameters in Table 4.7.11.1.5-1.

There is no measurement gap configured in the test. Before the test, UE is configured with 1 TRS set with the TRS resources in the set are configured in adjacent slot. UE is configured to perform L1-RSRP measurement based on the SSB resources 0 and 1.

Table 4.7.11.1.5-1: FR1 TRS based TDCP test parameters

Parameter	Config	Unit	Test 1 (FDD)		Test 2 (TDD)	
			1A	1B	2A	2B
SSB GSCN	1~4		freq1		freq1	
Duplex mode	1,3		FDD		N/A	
	2,4		N/A		TDD	
TDD Configuration	1,3		N/A		N/A	
	2,4		N/A		TDDConf.1.1	
$BW_{channel}$	1,3	MHz	10: $N_{RB,c}$ = 52		N/A	
	2,4		N/A		40: $N_{RB,c}$ = 106	
PDSCH Reference measurement channel	1,3		SR.1.1 FDD		N/A	
	2,4		N/A		SR.2.1 TDD	
RMSI CORESET Reference Channel	1,3		CR.1.1 FDD		N/A	
	2,4		N/A		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1,3		CCR.1.1 FDD		N/A	
	2,4		N/A		CCR.2.1 TDD	
SSB configuration	1,3		SSB.3 FR1		N/A	
	2,4		N/A		SSB.4 FR1	
OCNG Patterns	1~4		OP.1		OP.1	
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
TRS configuration	1,3		TRS.1.5 FDD		N/A	
	2,4		N/A		TRS.1.5 TDD	
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	1~4		SMTC.1		SMTC.1	
reportConfigType	1~4		periodic		periodic	
reportQuantity	1~4		ssb-Index-RSRP		ssb-Index-RSRP	
Number of reported RS	1~4		2		2	
L1-RSRP reporting period	1~4		slot80		slot80	
EPRE ratio of PSS to SSS	1~4	dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to						

PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc}	dBm/15kHz	1	-98		-98	
		2				
N_{oc} Note 2	dBm/SCS	1	-98		-98	
		2	-95		-95	
$\hat{E}_s/I_{ot}$	1~4	dB	TBD		TBD	
$\hat{E}_s/N_{oc}$	1~4	dB	20	10	20	10
SSB_RP	1,4		-78	-88	-78	-88
Propagation condition	1~4		TDL-A 30ns 10 Hz	TDL-A 30ns 300 Hz	TDL-A 30ns 10Hz	TDL-A 30ns 300 Hz
Antenna configuration	1~4		1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						

For Test 1A, the reported TDCP index shall be smaller than or equal to 6 for the 80% of the times over repeated tests.

For Test 1B: the reported TDCP index shall be smaller than or equal to 5 for the 80% of the times over repeated tests.

For Test 2A: the reported TDCP index shall be larger than 8 for the 80% of the times over repeated tests.

For Test 2B: the reported TDCP index shall be larger than 6 for the 80% of the times over repeated tests.

4A NE-DC with all NR cells in FR1

4A.0 General

This clause contains test scenarios for NR and E-UTRA dual connectivity with NR as PCell and E-UTRA and PSCell. This configuration is also known as NE-DC. All NR cells are in Frequency Range 1.

4A.1 Signalling characteristics

4A.1.1 E-UTRAN PSCell addition

4A.1.1.0 Minimum conformance requirements

4A.1.1.0.1 E-UTRA PSCell Addition Delay Requirement

This clause defines requirements for the delay within which the UE shall be able to configure an E-UTRAN PSCell in NR - E-UTRA dual connectivity. The requirements are applicable to an NR - E-UTRA dual connectivity capable UE.

Upon receiving E-UTRAN PSCell addition in subframe *n*, the UE shall be capable to transmit PRACH preamble towards E-UTRAN PSCell no later than in subframe $n + T_{config_EUTRAN-PSCell}$:

Where:

$T_{config_EUTRAN-PSCell} = T_{RRC_delay} + T_{activation_time} + 50ms + T_{E-UTRAN-PSCell_DU}$

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [13].

$T_{activation_time}$ is the E-UTRAN PSCell activation delay. If the E-UTRAN PSCell is known, then $T_{activation_time}$ is 20ms. If the E-UTRAN PSCell is unknown, then $T_{activation_time}$ is 30ms provided the E-UTRAN PSCell can be successfully detected on the first attempt.

$T_{E\text{-}UTRAN\text{-}PSCell_DU}$ is the delay uncertainty in acquiring the first available PRACH occasion in the E-UTRAN PSCell. $T_{E\text{-}UTRAN\text{-}PSCell_DU}$ is up to 30ms.

E-UTRAN PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the E-UTRAN PSCell configuration command:
  - the UE has sent a valid measurement report for the E-UTRAN PSCell being configured and
  - the E-UTRAN PSCell being configured remains detectable according to the cell identification conditions specified in clause 8.8 of TS 36.133 [23],
- E-UTRAN PSCell being configured also remains detectable during the E-UTRAN PSCell configuration delay $T_{config_EUTRAN\text{-}PSCell}$ according to the cell identification conditions specified in clause 8.8 of TS 36.133 [23].

otherwise it is unknown.

The PCell interruption specified in clause 8.2 of TS 38.133 [6] is allowed only during the RRC reconfiguration procedure [14].

4A.1.1.0.2 E-UTRA PSCell Release Delay Requirement

The requirements in this clause shall apply for a UE which is configured with PCell and E-UTRAN PSCell and may also be configured with one or more SCells and/or E-UTRAN SCells.

Upon receiving E-UTRAN PSCell release in subframe *n*, the UE shall accomplish the release actions specified in TS 38.331 [14] no later than in subframe $n+T_{RRC_delay}$:

Where

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [13].

The PCell interruption specified in clause 8.2 of TS 38.133 [6] is allowed only during the RRC reconfiguration procedure [14].

4A.1.1.1 NE-DC FR1 addition and release delay of known PSCell

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Message contents are FFS

4A.1.1.1.1 Test purpose

The purpose of this test is to verify that the LTE PSCell addition/release delay and interruption under NE-DC are within the specified requirements for the case when the PSCell is known by the UE at the time of addition.

4A.1.1.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and NE-DC from Release 15 onwards.

4A.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4A.1.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.4A.1.1.

4A.1.1.1.4 Test description

4A.1.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4A.1.1.1.4.1-1.

Table 4A.1.1.1.4.1-1: Test configurations for NE-DC PSCell addition and Release test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 4A.1.1.1.4.1-2.

Table 4A.1.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	FFS		
Channel bandwidth	As specified by the test configuration selected from Table 4A.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4A.1.1.1.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell) for the NE-DC setup. Cell 2 is the E-UTRA PSCell. The connection setup is done according to the settings in clause C.1.1.

3 Common test parameters are defined in Table 4A.1.1.1.4.1-3.

Table 4A.1.1.1.4.1-3: General Test Parameters for PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for NR cell and second for E-UTRAN Cell
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP (Config 1,2,4,5)	dBm	-97 Note 1	Actual RSRP threshold for event B1.
	Threshold RSRP (Config 3,6)	dBm	-97 Note 2	Actual RSRP threshold for event B1.
	Time to Trigger	S	0	
DRX			OFF	Continuous monitoring of primary cell
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.

T1	s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2	s	1	During this time the UE shall identify neighbour cell (cell2) and report event B1.
T3	s	0.5	During this time the UE adds the PSCell.
T4	s	0.5	During this time the UE sends CSI reports for PSCell.
T5	s	0.5	During this time the UE releases the PSCell.
Note 1: Value includes the TT based on the TT analysis results. Original value -96 dBm. TT: -1dB. Note 2: Value includes the TT based on the TT analysis results. Original value -93 dBm. TT: -4dB.			

4A.1.1.1.4.2 Test Procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [6] clause 4.5.
2. The SS shall set the parameters according to Table 4A.1.1.1.5-1 and 4A.1.1.1.5-2 as appropriate. T1 starts
3. The SS shall transmit an RRCReconfiguration message with event B1 configured.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. When T1 expires, the SS shall set T2 parameters according to Table 4A.1.1.1.5-1 and 4A.1.1.1.5-2 as appropriate. T2 starts.
6. The UE shall transmit a MeasurementReport message triggered by Event B1 for Cell 2 no later than 1.5s from the start of T2.
7. The SS shall transmit an RRCReconfiguration message to release measurement gap.
8. The UE shall transmit an RRCReconfigurationComplete message.
9. The SS then shall transmit RRCReconfiguration message with condition NE-DC according to TS 38.508-1 [6] Table 4.6.1-13 to add E-UTRA cell (PSCell). T3 starts when the UE receives the RRC message.
10. The UE shall transmit an RRCReconfigurationComplete message.
11. The UE shall send a PRACH to PSCell during T3. The UE shall send PRACH no later than 120ms from the start of T3, otherwise increase the number of failed iterations by one, switch off the UE and continue with step 17.
12. T4 starts.
13. During T4 the UE shall send at least one CSI report for PSCell with non-zero CQI index, otherwise increase the number of failed iterations by one, switch off the UE and continue to step 17.
14. The SS shall transmit RRCReconfiguration message with condition NE-DC_PSCell_Rel according to TS 38.508-1 [6] Table 4.6.1-13 to release E-UTRA cell (PSCell) after the UE has send at least one CQI report with non-zero CQI index for PSCell (Cell 2). T5 starts when the UE receives the RRC message.
15. The UE shall transmit an RRCReconfigurationComplete message.
16. The UE shall stop sending CSI reports for PSCell no later than 20ms from the start of T5, if so increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.
17. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for the next iteration of the test procedure loop.
18. If the UE is not switched off, the SS shall transmit an RRCRelease message to release the RRC connection then, the SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State RRC_CONNECTED with generic parameter Connectivity NR with , Connected without release On. If paging succeeds, go to step 20, otherwise switches off the UE.
19. Switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR with Connected without release On according to TS 38.508-1 [14] clause 4.5.

20. Repeat step 2-19 until a test verdict has been achieved.

4A.1.1.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4A.1.1.1.4.3-1: Common exception messages

Default Message Contents	
Common contents of system information blocks exceptions	FFS
Default RRC messages and information elements contents exceptions	FFS

4A.1.1.1.5 Test Requirements

Table 4A.1.1.1.5-1 defines the primary level settings including test tolerances for NR Cell 1. Table 4A.1.1.1.5-2 defines primary level settings including test tolerances for E-UTRA Cell 2.Table 4A.1.1.1.5-1: NR Cell Specific Parameters for PSCell Addition and Release

Parameter	Unit	Config	Test
NR RF Channel Number		1,2,3,4,5,6	1
E-UTRA RF Channel Number		1,2,3,4,5,6	2
TDD configuration		1,4	Not Applicable
		2,5	TDDConf.1.1
		3,6	TDDConf.2.1
$BW_{channel}$	MHz	1,4	10: $N_{RB,c}$ = 52
		2,5	10: $N_{RB,c}$ = 52
		3,6	40: $N_{RB,c}$ = 106
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1
PDSCH Reference measurement channel		1,4	SR.1.1 FDD
		2,5	SR.1.1 TDD
		3,6	SR.2.1 TDD
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD
		2,5	CR.1.1 TDD
		3,6	CR.2.1 TDD
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD
		2,5	CCR.1.1 TDD
		3,6	CCR.2.1 TDD
OCNG Patterns		1,2,3,4,5,6	OP.1
SSB configuration		1,2,4,5	SSB.1 FR1
		3,6	SSB.2 FR1
SMTC configuration		1,2,4,5	SMTC.1
		3,6	SMTC.1
TRS Configuration		1,4	TRS.1.1 FDD
		2,5	TRS.1.1 TDD
		3,6	TRS.1.2 TDD
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD
		2,5	CSI-RS.1.1 TDD
		3,6	CSI-RS.2.1 TDD
reportConfigType		1,2,3,4,5,6	periodic
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI
CSI reporting periodicity	slot	1,2,4,5	5
		3,6	10
CSI reporting offset	slot	1,2,4,5	2
		3,6	4
EPRE ratio of PSS to SSS			

EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)	dB	1,2,3,4,5,6	0
N_{oc} Note2	dBm/15 kHz	1,2,3,4,5,6	-88
N_{oc} Note2	dBm/SCS	1,2,4,5	-88
		3,6	-85
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	0
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	0
SS-RSRP Note3	dBm/SCS	1,2,4,5	-88
		3,6	-85
Io Note3	dBm/9.36MHz	1,2,4,5	-57
	dBm/38.1MHz	3,6	-51
Propagation condition		1,2,3,4,5,6	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 4A.1.1.1.5-2: E-UTRAN cell specific test parameters for PSCell Addition and Release tests

Parameter	Unit	E-UTRAN Cell				
		T1	T2	T3	T4	T5
Duplex mode		FDD or TDD				
TDD special subframe configuration Note1		6				
TDD uplink-downlink configuration Note1		1				
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100				
PDSCH parameters: DL Reference Measurement Channel Note2		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD				
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel Note2		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD				

OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA[Note3]	dB		
OCNG_RB[Note3]	dB		
N_{oc}[Note4]	dBm/15 kHz	N/A	-104
$\hat{E}_s/N_{oc}$	dB	-infinite	17
$\hat{E}_s/I_{ot}$	dB	-infinite	17
RSRP [Note5]	dBm/15 kHz	-infinite	-87
SCH_RP [Note5]	dBm/15 kHz	-infinite	-87
Io [Note5]	dBm/Ch BW	N/A	-59.13+10log($N_{RB,c}$ /50)
Propagation Condition		AWGN	
Antenna Configuration		1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall transmit the PRACH to PSCell at latest 120 ms[Note1] into T3.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T4.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T4

The UE shall stop sending CSI reports for PSCell in at latest 20ms into T5.

Interruption on PCell during PSCell addition and release shall not exceed the values specified for NE-DC in Clause 8.2.3.2.3 of TS 38.133 [4].

All the above test requirements shall be fulfilled in order for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

4A.1.2 Active BWP switch delay

4A.1.2.0 Minimum conformance requirements

FFS

4A.1.2.1 NE-DC FR1 DCI-based and timer-based DL active BWP switch in non-DRX in synchronous NE-DC

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- TT analysis is missing

- Test procedure is FFS

- Test applicability in TS 38.522 is FFS

- Test requirements contain values in [.]

- Message contents are FFS

4A.1.2.1.1 Test purpose

The purpose of this test is to verify that the active BWP switch delay under NE-DC is within the specified requirements for the case.

4A.1.2.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and NE-DC from Release 15 onwards. This test requires support of DCI and timer based active BWP switching delay type1 or type2 (*bwp-SwitchingDelay)* and BWP adaptation of at least 2BWPs (*bwp-SameNumerology).*

4A.1.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4A.1.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.4A.1.2.

4A.1.2.1.4 Test description

4A.1.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4A.12.4.1-1.

Table 4A.1.2.1.4.1-1: Test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 4A.1.2.1.4.1-2.

Table 4A.1.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	FFS		
Channel bandwidth	As specified by the test configuration selected from Table 4A.1.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4A.1.2.1.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell) for the NE-DC setup. Cell 2 is the E-UTRA PSCell. The power levels and settings for Cell 2 are set according to Annex A.6. The connection setup is done according to the settings in clause C.1.1.

3 Common test parameters are defined in Table 4A.1.2.1.4.1-3.

Table 4A.1.2.1.4.1-3: General test parameters for DL BWP switch in synchronous NE-DC

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
E-UTRA RF Channel Number		2	One E-UTRA radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
bwp-InactivityTimer	ms	[200]	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous NE-DC
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

4A.1.2.1.4.2 Test Procedure

1. FFS.

4A.1.2.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4A.1.2.1.4.3-1: Common exception messages

Default Message Contents	
Common contents of system information blocks exceptions	FFS
Default RRC messages and information elements contents exceptions	FFS

4A.1.2.1.5 Test Requirements

Table 4A.1.2.1.5-1 defines the primary level settings including test tolerances for NR Cell 1.

Table 4A.1.2.1.5-1: NR Cell specific test parameters for DL BWP switch in synchronous NE-DC

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,4		10 MHz: $N_{RB,c}$ = 52
	Config 2,5		10 MHz: $N_{RB,c}$ = 52
	Config 3,6		40 MHz: $N_{RB,c}$ = 106

Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,4		DLBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active DL BWP-2 Configuration	Config 1,4		DLBWP.1.3 Note 4
	Config 2,5		
	Config 3,6		
Initial UL BWP Configuration	Config 1,4		ULBWP.0.2 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1 Note 4
	Config 2,5		
	Config 3,6		
Active UL BWP-2 Configuration	Config 1,4		ULBWP.1.3 Note 4
	Config 2,5		
	Config 3,6		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2,4,5	dBm/SCS	[-104]
	Config 3,6		[-101]
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1,2,4,5	dBm/SCS	[-87]
	Config 3,6		[-90]
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4,5	dBm/9.36MHz	[-59]
	Config 3,6	dBm/38.16MHz	[-61.9]
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213.

During T1, the UE shall start to send the ACK for PCell in the DL slot right after DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for PCell in the DL slot right after DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PSCell interruption during PCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PSCell interruption of during PCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PSCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.36.2.6.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

4A.2 Measurement performance requirements

4A.2.1 SFTD accuracy

4A.2.1.0 Minimum conformance requirements

4A.1.1.0.1 NE-DC SFTD accuracy Requirement

The SFN and frame timing difference (SFTD) is measured between PCell and E-UTRAN PSCell under NE-DC.

The accuracy requirements in Table 4A.2.1.1.3-4 are applicable under the following conditions:

For FR1 PCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Io range defined in Table 4A.2.1.1.3-1.

Table 4A.2.1.1.3-1: PCell Io range conditions in FR1

Parameter	Io Note 1 range		
	NR operating band groups Note 4, 5	Minimum Io Note 2, 3	Maximum Io
		dBm/ SCS_{SSB}	dBm/$BW_{Channel}$

		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-121	-118	-50
	NR_FDD_FR1_B	-120.5	-117.5	-50
	NR_TDD_FR1_C	-120	-117	-50
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-50
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-50
	NR_FDD_FR1_G	-118	-115	-50
	NR_FDD_FR1_H	-117.5	-114.5	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The condition level is increased by $\Delta R_{IB,c}$ as defined in clause 7.3B in TS 38.101-3 [4], depending on E-UTRA – NR band combination.
NOTE 3: The condition level is increased by MSD as defined in clause 7.3B in TS 38.101-3 [4], if applicable depending on E-UTRA – NR band combination.
NOTE 4: NR operating band groups are as defined in clause 3A.4.1.
NOTE 5: Only NR bands within EN-DC band combinations as specified in clause 5.5B in TS 38.101-3 [4] are applicable.

For FR2 PCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-2 [2] for reference sensitivity are fulfilled.
- Io range defined in Table 4A.2.1.1.3-2.

Table 4A.2.1.1.3-2: PCell Io range conditions in FR2

Parameter	**Io Note 1 range**		
	Minimum Io Note 2, 3		**Maximum Io**
	dBm/ SCS_{SSB}		**dBm/$BW_{Channel}$**
	SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**	
Conditions	Same value as SSB_RP in Table B.2.4.1-2 of TS 38.133[6], according to UE Power class, operating band and angle of arrival	Same value as SSB_RP in Table B.2.4.1-2 of TS 38.133[6], according to UE Power class, operating band and angle of arrival	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth and specified at the Reference point.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [2]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

For E-UTRA PSCell SFN and frame timing measurement:

- Cell specific reference signals are transmitted either from one, two or four antenna ports.
- Conditions defined in TS 36.101 [27] Clause 7.3 for reference sensitivity are fulfilled.
- No changes to the uplink transmission timing are applied during the measurement period.
- $RSRP|_{dBm}$ according to Annex B.3.5 in TS 36.101 [27] for a corresponding Band.
- Io range defined in Table 4A.2.1.1.3-3.

Table 4A.2.1.1.3-3: E-UTRA PSCell Io range conditions

Parameter	**Io Note 1 range**		
	E-UTRA operating band groups Note 3	**Minimum Io**	**Maximum Io**
		dBm/15kHz Note 2	**dBm/$BW_{Channel}$**
Conditions	FDD_A, TDD_A	-121	-50
	FDD_C, TDD_C	-120	-50
	FDD_D	-119.5	-50
	FDD_E, TDD_E	-119	-50
	FDD_F	-118.5	-50
	FDD_G	-118	-50

	FDD_H	-117.5	-50
	FDD_N	-114.5	-50
NOTE 1: When in dBm/15kHz, the minimum Io condition is expressed as the average Io per RE over all REs in that symbol. Io may be different in different symbols within a subframe.			
NOTE 2: The condition level is increased by Δ>0, when applicable, as described in clauses B.4.2 and B.4.3 in TS36.133 [23].			
NOTE 3: E-UTRA operating band groups are as defined in clause 3.5 in TS 36.133 [23].			

Table 4A.2.1.1.3-4: SFTD measurement accuracy

Accuracy	Conditions	
	Ês/Iot Note 2	Frequency range
Ts Note 1	dB	
40*64*Tc	≥-3 dB	FR1
40*64*Tc		FR2
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [7]. NOTE 2: The parameter Ês/Iot is the minimum Ês/Iot of the pair of cells to which the requirement applies.		

4A.2.1.1 NE-DC FR1 SFTD accuracy

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- TT analysis is missing

- Message contents are FFS

4A.2.1.1.1 Test purpose

The purpose of this set of tests is to verify that the SFTD measurement accuracy is within the specified limits.

4A.2.1.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and NE-DC from Release 15 onwards. This test requires support of SFTD measurements between an NR PCell and an E-UTRA PSCell (*sftd-MeasPSCell-NEDC)*.

4A.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4A.2.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.4A.2.1.

4A.2.1.1.4 Test description

4A.2.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 4A.2.1.1.4.1-1.

Table 4A.2.1.1.4.1-1: Supported test configurations for SFTD accuracy

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 4A.2.1.1.4.1-2.

Table 4A.2.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	FFS		
Channel bandwidth	As specified by the test configuration selected from Table 4A.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 4A.1.1.1.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell) for the NE-DC setup. Cell 2 is the E-UTRA PSCell. The power levels and settings for Cell 2 are set according to Annex A.6. The connection setup is done according to the settings in clause C.1.1.

4A.2.1.1.4.2 Test Procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [6] clause 4.5.
2. Set the parameters according to Table 4A.2.1.1.5-1 and Table 4A.2.1.1.5-1 as appropriate. (Condition = 3)
3. The SS shall transmit an RRReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit a MeasurementReport containing the MeasResultCellListSFTD-r15 for the PSCell with SFTD measurements.
6. The SS shall check the reported SFN offset and frame boundary offset between the NR PCell and the E-UTRA PSCell. The number of failed iterations is increased by one if
   - The value of *sfn-OffsetResult* is different with the expected SFN offset value, or
   - The value of *frameBoundaryOffsetResult* is outside the range given in Table 4A.2.1.1.5-3, or
   - The UE fails to report the measurement value for Cell 2.

   Otherwise the number of successful iterations is increased by one.
7. Switch off and on the UE and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [6] clause 4.5.
8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

4A.2.1.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 4A.2.1.1.4.3-1: Common exception messages

Default Message Contents	
Common contents of system information blocks exceptions	FFS

Default RRC messages and information elements contents exceptions	FFS

4A.2.1.1.5 Test Requirements

Table 4A.2.1.1.5-1 defines the primary level settings including test tolerances for NR Cell 1

Table 4A.2.1.1.5-1: Test parameters for SFTD accuracy (Cell 1)

Parameter		Config	Unit	Test 1
SSB GSCN		1~6		freq1
Duplex mode		1,4		FDD
		2,5		TDD
		3,6		TDD
TDD Configuration		1,4		N/A
		2,5		TDDConf.1.1
		3,6		TDDConf.2.1
$BW_{channel}$		1,4	MHz	10: $N_{RB,c}$ = 52
		2,5		10: $N_{RB,c}$ = 52
		3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel		1,4		SR.1.1 FDD
		2,5		SR.1.1 TDD
		3,6		SR.2.1 TDD
RMSI CORESET Reference Channel		1,4		CR.1.1 FDD
		2,5		CR.1.1 TDD
		3,6		CR.2.1 TDD
RMC CORESET Reference Channel		1,4		CCR.1.1 FDD
		2,5		CCR.1.1 TDD
		3,6		CCR.2.1 TDD
SSB configuration		1,4		SSB.1 FR1
		2,5		SSB.1 FR1
		3,6		SSB.2 FR1
SMTC configuration		1~6		SMTC.1
DL BWP configuration		1~6		DLBWP.1.1
UL BWP configuration		1~6		ULBWP.1.1
OCNG Patterns		1~6		OP.1
EPRE ratio of PSS to SSS		1~6	dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			

N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-101
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
$\hat{E}_s / I_{ot}$		1~6	dB	2.7
$\hat{E}_s / N_{oc}$		1~6	dB	2.7
SS-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SCS	-107
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-74.18
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-65.08
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			

	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Propagation condition		1~6		AWGN
Antenna configuration		1~6		1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification				

Table 4A.2.1.1.5-2: Timing offsets for SFTD accuracy test

Configuration	SFN offset between PCell and PSCell	Frame boundary offset between PCell and PSCell (Ts)
1	100	-122000
2	300	-60540
3	500	1000
4	700	62540
5	900	124000

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and E-UTRAN target cell. The reported SFTD accuracy shall fulfil the requirement in clause 10.1.21.1 of TS 38.133 [4].

5 EN-DC with at least one NR cell in FR2

5.0 General

This clause contains test scenarios for E-UTRA and NR dual connectivity with E-UTRA as PCell and NR as PSCell. At least one NR cell is in Frequency Range 2.

For conformance testing involving FR2 test cases in this specification, the UE under test shall be pre-configured with UL Tx diversity schemes disabled to account for single polarization System Simulator (SS) in the test environment. The UE under test may transmit with dual polarization.

5.1 Void

5.2 Void

5.3 RRC_CONNECTED state mobility

5.3.1 Void

5.3.2 RRC connection mobility control

5.3.2.1 Void

5.3.2.2 Random access

5.3.2.2.1 EN-DC FR2 contention based random access

Editor's note: This test case is incomplete for Test 2, 3 and 7. The following aspects are either missing or not yet determined:

- The settable window for first preamble uplink power and the uplink calibration process are FFS.
- The test requirement for absolute uplink power is FFS.
- The test requirement for relative uplink power is FFS.
- The uncertainty value and test requirement for PRACH timing are in [ ]
- The results of the TT analysis are provisional until the corresponding MU values are agreed
- This test case has testability issues due to low uplink level for absolute uplink power and unapplicable requirement for relative uplink power, and therefore testing of Test 2, 3 and 7 is not recommended.

5.3.2.2.1.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits.

5.3.2.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC with FR2.

5.3.2.2.1.3 Minimum conformance requirement

The random access procedure is used when establishing the layer 1 communication between the UE and NG-RAN. The random access is as defined in TS 38.213 [8] clause 7.4 and the control of the RACH transmission is as defined in TS 38.321 [12] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 38.213 [8] clause 7.4 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in TS 38.101-2 [3] Table 6.3.4.2-1. The relative power applied to additional preambles shall have an accuracy as specified in TS 38.101-2 [3] Tables 6.3.4.3-1 and 6.3.4.3-2.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in TS 38.321 [12] clause 5.1.4.

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2 in TS 38.321 [12].

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [12].

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

The normative reference for this requirement is TS 38.133 [6] clause 6.2.2.

5.3.2.2.1.4 Test description

5.3.2.2.1.4.1 Initial conditions

This test can be run in the configurations defined in Table 5.3.2.2.1.4.1-1.

Table 5.3.2.2.1.4.1-1: Supported test configurations

Test Case ID	Description
5.3.2.2.1-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD

5.3.2.2.1-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Before the test procedure, Downlink and Uplink calibrations are carried out to derive signalled parameter values. This is necessary to ensure that the test case operates within the specified ranges. The detail of the calibration process is implementation dependent, but shall derive the values of Δ_{DL} and Δ_{UL} according to the following principles:

With the UE configured to report SS-RSRP, the Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value according to TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied at the Reference point. For a Reported value RSRP_x, x is treated as a positive integer value.

With the UE configured to send a first PRACH preamble, Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied at the Reference point, and with signalled values *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm.

Configure the test equipment and the DUT according to the parameters in Table 5.3.2.2.1.4.1-2.

Table 5.3.2.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR		
Channel bandwidth	As specified by the test configuration selected from Table 5.3.2.2.1.4.1-1.		
Propagation conditions	No interference		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.3.2.2.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The E-UTRAN PCell power levels and settings are specified in Table A.6.1.1-1. Cell 2 is the NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.3, with downlink signal levels as per clause C.1.2. General Test parameters are defined in Table 5.3.2.2.1.5-1.
3. Downlink signals for NR cell are initially set up according to clause C.2.1.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.3.2.2.1.4.2 Test procedure

For this test two cells are used, an E-UTRA serving cell (PCell) and an NR FR2 PSCell. For the NR PSCell, the System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 5.3.2.2.1.5-1.
3. The test system shall send a RRCReconfiguration message to the UE to add NR PSCell, then the UE shall trigger a random access procedure.
4. Test 1: Correct behaviour when transmitting Random Access Preamble

4.1. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured rsrp-ThresholdSSB.

5. Test 2: Correct behaviour when receiving Random Access Response

   5.1. Repeat steps 1-3.

   5.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

   5.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

   5.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   5.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

   5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 5.3.2.2.1.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in 5.3.2.2.1.5.

6. Test 3: Correct behaviour when not receiving Random Access Response

   6.1. Repeat steps 1-3.

   6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

   6.3. As no Random Access Response was received within the RA Response window, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

   6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

   6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 5.3.2.2.1.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in 5.3.2.2.1.5.

7. Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission

   7.1. Repeat steps 1-3.

   7.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

   7.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3 including C-RNTI MAC control element.

   7.4. The System Simulator shall send PDCCH addressed to the Temporary C-RNTI after receiving the msg3.

   7.5. The UE shall re-transmit the msg3 including C-RNTI MAC control element.

7.6. The System Simulator shall check if UE re-transmit the msg3.

8. Test 5: Correct behaviour when receiving a successful UE Contention Resolution

8.1. Repeat steps 1-3.

8.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

9.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3 including C-RNTI MAC control element.

9.4. The System Simulator shall send a PDCCH addressed to the C-RNTI.

9.5. The UE shall send PUSCH according to the received PDCCH addressed to the C-RNTI.

10. Test 7: Correct behaviour when contention Resolution timer expires

10.1. Repeat steps 1-3.

10.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

10.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

10.4. The System Simulator shall not send a response.

10.5. As there was no response, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the Contention Resolution Timer expires and then after the backoff timer expires.

10.6. Measure the power and timing of the first preamble after the Contention Resolution Timer and backoff timer expire and it shall not exceed the values specified in 5.3.2.2.1.5.

5.3.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3.1 with the following exceptions:

Table 5.3.2.2.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-115 with SSB-Index 0 Table 4.6.3-120 with SSB-Index 0

Table 5.3.2.2.1.4.3-1: *FrequencyInfoUL-SIB* for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-62			
Information Element	**Value/remark**	**Comment**	**Condition**
FrequencyInfoUL-SIB SEQUENCE {			
p-Max	23	23 dBm	UE PC3
	35	35 dBm	UE PC1
}			

Table 5.3.2.2.1.4.3-2: RACH-ConfigCommon for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n48		FR2
}			
groupBconfigured SEQUENCE {			
numberOfRA-PreamblesGroupA	48		
}			
ra-ContentionResolutionTimer	sf48		
rsrp-ThresholdSSB	RSRP_69 +Δ_{DL}	Δ_{DL} is derived from the downlink calibration process	
prach-RootSequenceIndex CHOICE {			
l139	0		
}			
msg1-SubcarrierSpacing	kHz 120		
}			

Table 5.3.2.2.1.4.3-3: RACH-ConfigGeneric for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		FR2
msg1-FDM	one		FR2
zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-100		
preambleTransMax	n6		
powerRampingStep	dB2		
ra-ResponseWindow	sl10		
}			

Table 5.3.2.2.1.4.3-4: *ServingCellConfigCommonSIB* for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-169			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommonSIB ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	20 +Δ_{UL}	Δ_{UL} is derived from the uplink calibration process	
}			

5.3.2.2.1.5 Test requirement

Table 5.3.2.2.1.5-2 defines the primary level settings for contention based random access test in FR2 for NR Standalone. Tables 5.3.2.2.1.5-3, 5.3.2.2.1.5-4 and 5.3.2.2.1.5-5 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances.

Table 5.3.2.2.1.5-1: General test parameters

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2		SSB.1 FR2	As defined in A.3.2

CSI-RS for tracking	Config 1,2		TRS.2.1 TDD	
Duplex Mode for Cell 2	Config 1,2		TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	As defined in A.1.5
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OP.3	As defined in A.2.1
PDSCH Reference Channel Note 2	Config 1,2		SR.3.1 TDD	As defined in A.1.1
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	As defined in A.1.2
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	As defined in A.1.3
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [13]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 of TS 38.101-2 [3]
PRACH Configuration			PRACH.1 FR2	As defined in A.7.2, with exceptions as defined below
rsrp-ThresholdSSB		dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [13]

NOTE 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
NOTE 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
NOTE 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.
NOTE 4: The Δ_{DL} value is calculated as ($RSRP_{_REP}$ – RSRP_76), where $RSRP_{_REP}$ is the SS-RSRP Reported value in TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 5.3.2.2.1.5-2: OTA-related test parameters

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.9.1
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	

	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (NOTE 3)	
NOTE 1: No artificial noise is applied in this test. NOTE 2: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation NOTE 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].				

Test 1: Correct behaviour when transmitting Random Access Preamble

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.

Test 2: Correct behaviour when receiving Random Access Response

- The power of the first preamble shall be 0.6 dBm within the accuracy specified in Table 5.3.2.2.1.5-3.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 5.3.2.2.1.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 5.3.2.2.1.5-5.

Test 3: Correct behaviour when not receiving Random Access Response

- The power of the first preamble shall be 0.6 dBm within the accuracy specified in Table 5.3.2.2.1.5-3.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 5.3.2.2.1.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 5.3.2.2.1.5-5.

Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission

- The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

Test 5: Correct behaviour when receiving a successful UE Contention Resolution

- The UE shall send PUSCH according to the PDCCH addressed to the C-RNTI.

Test 7: Correct behaviour when contention resolution timer expires

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if the contention resolution timer expires.
- The power of the first preamble shall be 0.6 dBm within the accuracy specified in Table 5.3.2.2.1.5-3.
- The transmit timing of the PRACH transmission shall be within the accuracy specified in Table 5.3.2.2.1.5-5.

Table 5.3.2.2.1.5-3 Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± FFS dB

Table 5.3.2.2.1.5-4 Relative power tolerance Test requirements

Measured power	Power step ΔP (dB)	PRACH (dB)
Measured power of both PRACHs being compared > (P_{max}^{Note1} – 6dB)	2 ≤ ΔP < 3	± (4+FFS).
Measured power of either PRACHs being compared ≤ (P_{max}^{Note1} – 6dB)		± (6+FFS)
NOTE 1: P_{max} is the Min peak EIRP defined in clause 6.2.1 of TS 38.101-2 [3], selected according to power class and operating band.		

Table 5.3.2.2.1.5-5: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
2	120	120	224+[48]*T_c
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [7]			

5.3.2.2.2 EN-DC FR2 non-contention based random access

Editor's note: This test case is incomplete for Test 3 and 4. The following aspects are either missing or not yet determined:

- The settable window for first preamble uplink power and the uplink calibration process are FFS.
- The test requirement for absolute uplink power is FFS.
- The test requirement for relative uplink power is FFS.
- The uncertainty value and test requirement for PRACH timing are in [ ]
- The results of the TT analysis are provisional until the corresponding MU values are agreed
- This test case has testability issues due to low uplink level for absolute uplink power and unapplicable requirement for relative uplink power, and therefore testing of Test 3 and 4 is not recommended.

5.3.2.2.2.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits.

5.3.2.2.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC with FR2. Additionally Test 2 is applicable to UE that supports CSI-RS based Random Access Preamble which requires UE to support csi-RS-CFRA-ForHO.

5.3.2.2.2.3 Minimum conformance requirement

The random access procedure is used when establishing the layer 1 communication between the UE and NG-RAN. The random access is as defined in TS 38.213 [8] clause 7.4 and the control of the RACH transmission is as defined in TS 38.321 [12] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 38.213 [8] clause 7.4 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in TS 38.101-2 [3] Table 6.3.4.2-1. The relative power applied to additional preambles shall have an accuracy as specified in TS 38.101-2 [3] Tables 6.3.4.3-1 and 6.3.4.3-2.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in TS 38.321 [12] clause 5.1.4.

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs is configured, with the UE selected CSI-RS with CSI-RSRP above *cfra-csirs-DedicatedRACH-Threshold* amongst the associated CSI-RSs, UE shall have the capability to select the Random Access Preamble corresponding to the selected CSI-RS, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clause 6.2.2.

Non-contention based random access procedure is not initialized for Other SI requested from UE or for beam failure recovery, so the requirements related to those features are omitted.

5.3.2.2.2.4 Test description

5.3.2.2.2.4.1 Initial conditions

This test can be run in the configurations defined in Table 5.3.2.2.2.4.1-1.

Table 5.3.2.2.2.4.1-1: Supported test configurations

Test Case ID	Description
5.3.2.2.2-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD
5.3.2.2.2-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Before the test procedure, Downlink and Uplink calibrations are carried out to derive signalled parameter values. This is necessary to ensure that the test case operates within the specified ranges. The detail of the calibration process is implementation dependent, but shall derive the values of Δ_{DL} and Δ_{UL} according to the following principles:

With the UE configured to report SS-RSRP, the Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value according to TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied at the Reference point. For a Reported value RSRP_x, x is treated as a positive integer value.

With the UE configured to send a first PRACH preamble, Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied at the Reference point, and with signalled values *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm.

Configure the test equipment and the DUT according to the parameters in Table 5.3.2.2.2.4.1-2.

Table 5.3.2.2.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.

Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR		
Channel bandwidth	As specified by the test configuration selected from Table 5.3.2.2.2.4.1-1.		
Propagation conditions	No interference		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.3.2.2.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The E-UTRAN PCell power levels and settings are specified in Table A.6.1.1-1. Cell 2 is the NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.3, with downlink signal levels as per clause C.1.2. General Test parameters are defined in Table 5.3.2.2.2.5-1.

3. Downlink signals for NR cell are initially set up according to clause C.2.1.

4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.3.2.2.2.4.2 Test procedure

For this test two cells are used, an E-UTRA serving cell (PCell) and an NR FR2 PSCell. For the NR PSCell, the System Simulator shall explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Ensure the UE will choose SSB with index 0 for this procedure.

2. Set the parameters according to Table 5.3.2.2.2.5-1.

3. SS sends a RRCReconfiguration to trigger a contention-free random access procedure according to Table 5.3.2.2.2.4.3-2.

4. Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble

   4.1. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble has the Preamble Index associated with the SSB with index 0, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

5. Test 2: Correct behaviour when transmitting CSI-RS-based Random Access Preamble

   5.1. Set the parameters according to Table 5.3.2.2.2.5-1 Subtest 2.

   5.2. Repeat steps 1-3

   5.3. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble has the Preamble Index associated with the CSI-RS configured, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

6. Test 3: Correct behaviour when receiving Random Access Response

   6.1. Repeat steps 1-3

   6.2. The UE shall send preambles to the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power.

6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator.

6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 5.3.2.2.2.5. Measure the relative power and timing applied to additional preambles (last 2 preambles) and it shall not exceed the values specified in 5.3.2.2.2.5.

7. Test 4: Correct behaviour when not receiving Random Access Response

7.1. Repeat steps 1-3.

7.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 2 preambles.

7.3. As no Random Access Response was received within the RA Response window configured in *RACH-ConfigCommon*, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power.

7.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator.

7.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

7.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 5.3.2.2.2.5. Measure the relative power and timing applied to additional preambles (last 2 preambles) and it shall not exceed the values specified in 5.3.2.2.2.5.

5.3.2.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3.1 with the following exceptions:

Table 5.3.2.2.2.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-115 with SSB-Index 0 Table 4.6.3-120 with SSB-Index 0

Table 5.3.2.2.2.4.3-1: RACH-ConfigCommon for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
rsrp-ThresholdSSB	RSRP_69 +Δ_{DL}	Δ_{DL} is derived from the downlink calibration process	Subtest 1
prach-RootSequenceIndex CHOICE {			
l139	0		

}			
msg1-SubcarrierSpacing	kHz 120		
}			

Table 5.3.2.2.2.4.3-2: RACH-ConfigDedicated for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF CFRA-SSB-Resource {	2 entries		
CFRA-SSB-Resource[1] SEQUENCE {			
ssb[1]	0		
ra-PreambleIndex[1]	40		Subtest 1
}			
CFRA-SSB-Resource[1] SEQUENCE {			
ssb[2]	1		
ra-PreambleIndex[1]	40		Subtest 1
}			
}			
ra-ssb-OccasionMaskIndex	1		Subtest 1
}			
csirs SEQUENCE {			
csirs-ResourceList SEQUENCE (SIZE(1..maxRA-CSIRS -Resources)) OF {			
ra-OccasionList	1		Subtest 2
ra-PreambleIndex[1]	40		Subtest 2
}			
rsrp-ThresholdCSI-RS	RSRP_69 +Δ_{DL}	Δ_{DL} is derived from the downlink calibration process	Subtest 2
}			
}			
}			
}			

Table 5.3.2.2.2.4.3-3: RACH-ConfigGeneric for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		FR2
msg1-FDM	one		FR2
zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-100		
preambleTransMax	n6		
powerRampingStep	dB2		
ra-ResponseWindow	sl10		
}			

Table 5.3.2.2.2.4.3-4: *ServingCellConfigCommon* for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-168			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			

ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	20 +Δ_{UL}	Δ_{UL} is derived from the uplink calibration process	
}			

Table 5.3.2.2.2.4.3-5: CellGroupConfig for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex		
reconfigurationWithSync SEQUENCE {			
newUE-Identity	1		
t304	ms1000		
rach-ConfigDedicated CHOICE {			
uplink	RACH-ConfigDedicated for Non-Contention Based Random Access	Table 5.3.2.2.2.4.3-2	
}			
spCellConfigDedicated SEQUENCE {			
firstActiveDownlinkBWP-Id	BWP-Id		
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
srs-Config	SRS-Config		
}			
firstActiveUplinkBWP-Id	BWP-Id		
}			
}			

Table 5.3.2.2.2.4.3-6: *FrequencyInfoUL-SIB* for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-62			
Information Element	**Value/remark**	**Comment**	**Condition**
FrequencyInfoUL-SIB SEQUENCE {			
p-Max	23	23 dBm	UE PC3
	35	35 dBm	UE PC1
}			

5.3.2.2.2.5 Test requirement

Table 5.3.2.2.2.5-2 defines the primary level settings for non-contention based random access test in FR2 for NR Standalone. Tables 5.3.2.2.2.5-3, 5.3.2.2.2.5-4 and 5.3.2.2.2.5-5 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances.

Table 5.3.2.2.2.5-1: General test parameters

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2	As defined in A.3.2
CSI-RS Configuration	Config 1,2		N/A	CSI-RS.3.1 TDD	As defined in A.1.4
Duplex Mode for Cell 2	Config 1,2		TDD	TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	TDDConf.3.1	As defined in A.1.5
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 24	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OP.3	OP.3	As defined in A.2.1.
PDSCH Reference Channel Note 2	Config 1,2		SR3.1 TDD	SR3.1 TDD	As defined in A.1.1.

RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD	As defined in A.1.2
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD	As defined in A.1.3
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			
EPRE ratio of PDSCH_DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH_DMRS		dB			
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	+20 +Δ_{UL}	As defined in TS 38.331 [13]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)		dBm	maximum value configurable for certain power class	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [3]
PRACH Configuration			PRACH.2 FR2	PRACH.3 FR2	As defined in A.7.2, with exceptions as defined below.
rsrp-ThresholdSSB		dBm	RSRP_69 +Δ_{DL}	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower		dBm	-100	-100	As defined in TS 38.331 [13]

NOTE 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
NOTE 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
NOTE 3: The Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.
NOTE 4: The Δ_{DL} value is calculated as (RSRP_REP – RSRP_76), where RSRP_REP is the SS-RSRP Reported value in TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 5.3.2.2.2.5-2: OTA-related test parameters

Parameter		Unit	Test-1	Test-2	Comments
AoA setup			Setup 1	Setup 1	As defined in A.9.1
Assumption for UE beams Note 2			Rough	Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	-80.6	
	Es/Iot_{BB}	dB	21.09	21.09	
	Io	dBm/95.04 MHz	-56.01	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	-95.0	
	Es/Iot_{BB}	dB	6.69	6.69	
	Io	dBm/95.04 MHz	-70.41	-70.41	Io in symbols containing SSB index 1

Propagation Condition	-	No external noise (NOTE 3)	No external noise (NOTE 3)	
NOTE 1: No artificial noise is applied in this test. NOTE 2: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation NOTE 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].				

Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.
- The Random Access Preamble shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0.
- The selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

Test 2: Correct behaviour when transmitting CSI-RS-based Random Access Preamble

- The Random Access Preamble shall have the Preamble Index associated with the CSI-RS configured.
- The Random Access Preamble shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured.
- The selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

Test 3: Correct behaviour when receiving Random Access Response

- The power of the first preamble shall be 0.6 dBm within the accuracy specified in Table 5.3.2.2.2.5-3.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 5.3.2.2.2.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 5.3.2.2.2.5-5.

Test 4: Correct behaviour when not receiving Random Access Response

- The power of the first preamble shall be 0.6 dBm within the accuracy specified in Table 5.3.2.2.2.5-3.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 5.3.2.2.2.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 5.3.2.2.2.5-5.

Table 5.3.2.2.2.5-3 Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± FFS dB

Table 5.3.2.2.2.5-4 Relative power tolerance Test requirements

Measured power	Power step ΔP (dB)	PRACH (dB)
Measured power of both PRACHs being compared > (P_{max}^{Note1} – 6dB)	2 ≤ ΔP < 3	± (4+FFS).
Measured power of either PRACHs being compared ≤ (P_{max}^{Note1} – 6dB)		± (6+FFS)
NOTE 1: P_{max} is the Min peak EIRP defined in clause 6.2.1 of TS 38.101-2 [3], selected according to power class and operating band.		

Table 5.3.2.2.2.5-5: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
2	120	120	224+[48]*T_c
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [7]			

5.3.2.2.3 EN-DC FR2 2-step contention based random access

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Message contents are not complete.

- TT analysis and test requirements are missing.

- Test procedure is FFS

5.3.2.2.3.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the MsgA PRACH and MsgA PUSCH power settings and timing are within specified limits.

5.3.2.2.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with FR2 and twoStepRACH-r16.

5.3.2.2.3.3 Minimum conformance requirement

Same as in clause 4.3.2.2.3.3

The normative reference for this requirement is TS 38.133 [6] clause 6.2.2 and A.5.3.2.2.3.

5.3.2.2.3.4 Test description

5.3.2.2.3.4.1 Initial conditions

This test can be run in the configurations defined in Table 5.3.2.2.3.4.1-1.

Table 5.3.2.2.3.4.1-1: Supported test configurations

Test Case ID	Test Config Index	Description
5.3.2.2.3-1	1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD
5.3.2.2.3-2	2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations		

Before the test procedure, Downlink and Uplink calibrations are carried out to derive signalled parameter values. This is necessary to ensure that the test case operates within the specified ranges. The detail of the calibration process is implementation dependent, but shall derive the values of Δ_{DL} and Δ_{UL} according to the following principles:

With the UE configured to report SS-RSRP, the Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value according to TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied at the Reference point. For a Reported value RSRP_x, x is treated as a positive integer value.

With the UE configured to send a first PRACH preamble, Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied at the Reference point, and with signalled values *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm.

Configure the test equipment and the DUT according to the parameters in Table 5.3.2.2.3.4.1-2.

Table 5.3.2.2.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR		
Channel bandwidth	As specified by the test configuration selected from Table 4.3.2.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.3.2.2.3.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The E-UTRAN PCell power levels and settings are specified in Table A.6.1.1-1. Cell 2 is the NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.3, with downlink signal levels as per clause C.1.2. General Test parameters are defined in Table 5.3.2.2.3.5-1.
3. Downlink signals for NR cell are initially set up according to clause C.2.1.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.3.2.2.3.4.2 Test procedure

For this test two cells are used, an E-UTRA serving cell (PCell) and an NR FR2 PSCell. For the NR PSCell, the System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 5.3.2.2.3.5-1.
3. The test system shall send a RRCReconfiguration message to the UE to add NR PSCell, then the UE shall trigger a random access procedure.

   FFS

5.3.2.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3.1 with the following exceptions:

Table 5.3.2.2.3.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	FFS
Common exceptions to the contents of TS 38.508-1 [14]	FFS

5.3.2.2.3.5 Test requirement

Table 5.3.2.2.3.5-2 defines the primary level settings for contention based random access test in FR2 for NR Standalone. The test requirements are FFS.

Table 5.3.2.2.3.5-1: General test parameters

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2		SSB.1 FR2	As defined in A.3.2
Duplex Mode for Cell 2	Config 1,2		TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	As defined in A.1.5
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OP.3	As defined in A.2.1
PDSCH Reference Channel Note 2	Config 1,2		SR.3.1 TDD	As defined in A.1.1
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	As defined in A.1.2
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	As defined in A.1.3
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [13]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 of TS 38.101-2 [3]
MsgA Configuration			FR2 MsgA configuration 1	As defined in FFS, with exceptions as defined below
msgA-RSRP-ThresholdSSB		dBm	RSRP_69 +ΔDL	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
msgA-PreambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [13]

NOTE 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
NOTE 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
NOTE 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.
NOTE 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 5.3.2.2.3.5-2: OTA-related test parameters

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.9.1
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
	Es Note1	dBm/SCS	-95.0	

SSB with index 1	SSB_RP	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (NOTE 3)	
NOTE 1: No artificial noise is applied in this test. NOTE 2: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation NOTE 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].				

5.3.2.2.4 EN-DC FR2 2-step non-contention based random access

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Message contents are not complete.

- TT analysis and test requirements are missing.

- Test procedure is FFS

5.3.2.2.4.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the MsgA PRACH and MsgA PUSCH power settings and timing are within specified limits.

5.3.2.2.4.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with FR2 and twoStepRACH-r16.

5.3.2.2.4.3 Minimum conformance requirement

Same as in clause 4.3.2.2.4.3

The normative reference for this requirement is TS 38.133 [6] clause 6.2.2 and A.5.3.2.2.4.

5.3.2.2.4.4 Test description

5.3.2.2.4.4.1 Initial conditions

This test can be run in the configurations defined in Table 5.3.2.2.4.4.1-1.

Table 5.3.2.2.4.4.1-1: Supported test configurations

Test Case ID	Test Config Index	Description
5.3.2.2.4-1	1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD
5.3.2.2.4-2	2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD
NOTE: The UE is only required to be tested in one of the supported test configurations		

Before the test procedure, Downlink and Uplink calibrations are carried out to derive signalled parameter values. This is necessary to ensure that the test case operates within the specified ranges. The detail of the calibration process is implementation dependent, but shall derive the values of Δ_{DL} and Δ_{UL} according to the following principles:

With the UE configured to report SS-RSRP, the Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value according to TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied at the Reference point. For a Reported value RSRP_x, x is treated as a positive integer value.

With the UE configured to send a first PRACH preamble, Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied at the Reference point, and with signalled values *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm.

Configure the test equipment and the DUT according to the parameters in Table 5.3.2.2.4.4.1-2.

Table 5.3.2.2.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 4.3.2.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.3.2.2.4.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The E-UTRAN PCell power levels and settings are specified in Table A.6.1.1-1. Cell 2 is the NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.3, with downlink signal levels as per clause C.1.2. General Test parameters are defined in Table 5.3.2.2.4.5-1.
3. Downlink signals for NR cell are initially set up according to clause C.2.1.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.3.2.2.4.4.2 Test procedure

For this test two cells are used, an E-UTRA serving cell (PCell) and an NR FR2 PSCell. For the NR PSCell, the System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 5.3.2.2.4.5-1.
3. The test system shall send a RRCReconfiguration message to the UE to add NR PSCell, then the UE shall trigger a random access procedure.

   FFS

5.3.2.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3.1 with the following exceptions:

Table 5.3.2.2.4.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	FFS
Common exceptions to the contents of TS 38.508-1 [14]	FFS

5.3.2.2.4.5 Test requirement

Table 5.3.2.2.4.5-2 defines the primary level settings for non-contention based random access test in FR2 for NR Standalone. The test requirements are FFS.

Table 5.3.2.2.4.5-1: General test parameters

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2		SSB.1 FR2	As defined in A.3.2
Duplex Mode for Cell 2	Config 1,2		TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	As defined in A.1.5
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OP.3	As defined in A.2.1
PDSCH Reference Channel Note 2	Config 1,2		SR.3.1 TDD	As defined in A.1.1
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	As defined in A.1.2
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	As defined in A.1.3
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [13]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 of TS 38.101-2 [3]
MsgA Configuration			FR2 MsgA configuration 2	As defined in FFS, with exceptions as defined below
msgA-RSRP-ThresholdSSB		dBm	RSRP_69 +ΔDL	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
msgA-PreambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [13]

NOTE 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
NOTE 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
NOTE 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.
NOTE 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 5.3.2.2.4.5-2: OTA-related test parameters

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.9.1
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above
	SSB_RP	dBm/SCS	-80.6	

				configured *rsrp-ThresholdSSB*
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (NOTE 3)	
NOTE 1: No artificial noise is applied in this test. NOTE 2: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation NOTE 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].				

5.3.2.3 Void

5.4 Timing

5.4.1 UE transmit timing

5.4.1.0 Minimum Conformance Requirements

5.4.1.0.1 Minimum conformance requirements for UE transmit timing accuracy

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 5.4.1.0.1-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS or it is the PRACH transmission.

The UE shall meet the Te requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}})\times T_{\mathrm{c}}$. The downlink timing is defined as the time when the first detected path (in time) of the corresponding downlink frame is received from the reference cell. N_{TA} for PRACH is defined as 0.

$(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}})\times T_{\mathrm{c}}$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in TS 38.133 [6] clause 7.3 was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{\mathrm{TA\ offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{\mathrm{TA\ offset}}$ is defined in Table 5.4.1.0.1-2.

Table 5.4.1.0.1-1: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (KHz)	SCS of uplink signals (KHz)	T_e
1	15	15	$12*64*T_c$
		30	$10*64*T_c$
		60	$10*64*T_c$
	30	15	$8*64*T_c$
		30	$8*64*T_c$
		60	$7*64*T_c$
2	120	60	$3.5*64*T_c$
		120	$3.5*64*T_c$
	240	60	$3*64*T_c$
		120	$3*64*T_c$

NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6]

Table 5.4.1.0.1-2: The Value of $N_{\text{TA offset}}$

Frequency range and band of cell used for uplink transmission	$N_{\text{TA offset}}$ (Unit: T_C)
FR1 FDD band without LTE-NR coexistence case or FR1 TDD band without LTE-NR coexistence case	25600 (Note 1)
FR1 FDD band with LTE-NR coexistence case	0 (Note 1)
FR1 TDD band with LTE-NR coexistence case	39936 (Note 1)
FR2	13792
NOTE: The UE identifies $N_{\text{TA offset}}$ based on the information n-TimingAdvanceOffset according to [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{\text{TA offset}}$ is set as 25600 for FR1 band. In case of multiple UL carriers in the same TAG, UE expects that the same value of n-TimingAdvanceOffset is provided for all the UL carriers according to clause 4.2 in [3] and the value 39936 of $N_{\text{TA offset}}$ can also be provided for a FDD serving cell.NOTE 2: Void	

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell except when the timing advance in TS 38.133 [6] clause 7.3 is applied.

When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$, the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{\text{TA}} + N_{\text{TA offset}}) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q.

2) The minimum aggregate adjustment rate shall be T_p per second.

3) The maximum aggregate adjustment rate shall be T_q per 200ms.

where the maximum autonomous time adjustment step T_q and the aggregate adjustment rate T_p are specified in Table 5.4.1.0.1-3.

Table 5.4.1.0.1-3: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (KHz)	T_q	T_p
1	15	$5.5*64*T_c$	$5.5*64*T_c$
	30	$5.5*64*T_c$	$5.5*64*T_c$
	60	$5.5*64*T_c$	$5.5*64*T_c$
2	60	$2.5*64*T_c$	$2.5*64*T_c$
	120	$2.5*64*T_c$	$2.5*64*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]			

The normative reference for this requirement is TS.38.133 [6] clause 7.1.2.

5.4.1.1 EN-DC FR2 UE transmit timing accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC1, PC3

- The test is incomplete for UE power classes other than PC1 and PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.4.1.1.1 Test purpose

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2

5.4.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC FR2.

5.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.4.1.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.5.4.1.1

5.4.1.1.4 Test Description

5.4.1.1.4.1 Initial Conditions

This test can be run in one of the configurations defined in Table 5.4.1.1.4.1-1.

Table 5.4.1.1.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
NOTE: The UE is only required to be tested in one of the supported test configurations in FR2 depending on UE capability.	

Configure the test equipment and the DUT according to the parameters in Table 5.4.1.1.4.1-2

Table 5.4.1.1.4.1-2: Initial conditions for EN-DC FR2 transmit timing accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.1.4.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5 4.1.1.4.3.
2. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.6.1.1-1. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2.
3. Downlink signals for NR cell are initially set up according to clause C.1.2 and C.1.3.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.4.1.1.4.2 Test procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR FR2 cell (PSCell). The downlink timing of the PSCell is changed and the changes in UE transmit timing are observed. The transmit timing is verified by the UE transmitting SRS used as a measurement reference facilitating the SS timing estimation.

The test sequence shall be carried out in RRC_CONNECTED for every test case. Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

Following will be the test sequence for this test

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Set up E-UTRA PCell according to parameters given in Table A.6.1.1-1 and setup NR PSCell according to parameters given in Table 5.4.1.1.4.1-1.

3. The SS shall transmit an RRCConnectionReconfiguration message configuring the UE with the message content defined in clause 5.4.1.1.4.3.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. Set the UE in the Rx beam peak direction found with a 3D EIS scan as performed in Annex I.1 - I.3. Allow at least BEAM_SELECT_WAIT_TIME (NOTE 1) for the UE Rx beam selection to complete.

6. After connection set up with the cell and during 2 seconds before DL timing adjustment, the test equipment shall monitor all SRS transmissions and verify that, for each received SRS, the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.

   a. The N_{TA} offset value (in T_c units) is 13792 for FR2

   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 5.4.1.1.5-4.

7. The test system shall adjust the timing of the DL path by values given in Table 5.4.1.1.4.2-1

Table 5.4.1.1.4.2-1: Adjustment Value for DL Timing

SCS of SSB signals (KHz)	Adjustment Value	
	Test1	Test2
240	+8*64Tc	+4*64Tc

8. The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Table 5.4.1.1.5-5. This will only be done for Test1. The test system samples the UE Transmit Timing once per SRS transmission (as per configured SRS periodicity). To check Rule 1, the SS shall check that the maximum time adjustment step size T_q between one SRS transmission to next consecutive SRS transmission of a valid UL slot is within Rule 1 as specified in clause 5.4.1.0.1 and Table 5.4.1.0.1-3. To check that the minimum adjustment rate is within Rule 2 as specified in clause 5.4.1.0.1 and Table 5.4.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 1 + offset seconds sliding window (offset in ms to the next consecutive SRS transmission), with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. To check that the maximum adjustment rate is within Rule 3 as specified in clause 5.4.1.0.1 and Table 5.4.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 200ms – offset sliding window of previous SRS transmission, with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. The three rules apply until the UE transmit timing offset is within the limits specified in 5.4.1.0.1 and Table 5.4.1.0.1-3 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1. The test system will wait till evaluation interval of T seconds is met to ensure UE transmit timing is stable at the end of the step, where T=.DL_timing_change[Ts]/5.5Ts and DL_timing_change is specified in Table 5.4.1.1.4.2-1.

9. After the UE transmit timing is within the limits specified in step 7, and during 2 seconds, the test system shall monitor all SRS transmissions and verify that, for each received SRS, the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

NOTE: The BEAM_SELECT_WAIT_TIME default value is defined in Annex K.1.1 in TS 38.521-2 [3].

5.4.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.4.1.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1

Table 5.4.1.1.4.3-1: *SRS-Config* : Additional test requirement for UE transmit timing accuracy for EN-DC FR2 UE

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {			
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {			
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	17		
}			
groupOrSequenceHopping	Neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
sl1	0		Test 1
sl2560	4		Test 2
}			
}			
}			
}			
}			
}			

Table 5.4.1.1.4.3-2: *DRX-Config* : Additional test requirement for UE transmit timing accuracy Test 2 for EN-DC FR2

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
DRX-Config ::= CHOICE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms6		
}			
drx-InactivityTimer	ms1		
drx-HARQ-RTT-TimerDL	56		
drx-HARQ-RTT-TimerUL	56		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		

drx-LongCycleStartOffset CHOICE {			
ms320	0		
}			
shortDRX		NOT PRESENT	
}			

5.4.1.1.5 Test Requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 5.4.1.1.5-4.

The UE shall meet the Te requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_{\mathrm{c}}$. The downlink timing is defined as the time when the first detected path (in time) of the corresponding downlink frame is received from the reference cell. N_{TA} for PRACH is defined as 0.

$(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_{\mathrm{c}}$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{\mathrm{TA\ offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{\mathrm{TA\ offset}}$ is defined in Table 5.4.1.1.5-5.

Table 5.4.1.1.5-1: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2	Band Group
SSB ARFCN		1,2	Freq1	Freq1	
Duplex Mode		1,2	TDD		
TDD configuration		1,2	TDDConf.3.1		
$BW_{channel}$	MHz	1,2	100: NRB,c = 66		
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1		
TRS Configuration		1,2	TRS.2.1 TDD		
PDSCH/PDCCH TCI State		1,2	TCI.State.2		
DRx Cycle	ms	1,2	N/A	DRX.8[Note5]	
PDSCH Reference measurement channel		1,2	SR.3.3 TDD		
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD		
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD		
OCNG Patterns		1,2	OP.1		
SSB Configuration		1,2	SSB.4 FR2		
SMTC Configuration		1,2	SMTC.1		
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120		
EPRE ratio of PSS to SSS	dB	1,2	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					

EPRE ratio of OCNG to OCNG DMRS (Note 1)					
Propagation condition		1,2	AWGN		
SRS Config		1,2	Config1Note6	Config2Note6	
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Void NOTE 3: Void NOTE 4: Void NOTE 5: DRx related parameters are given in Table A.3.3.5-1 or Table A.5-1 NOTE 6: SRS configs are given in Table A. 5.4.1.1.5-2					

Table 5.4.1.1.5-2: SRS Configuration for Timing Accuracy Test

	Field	Config1	Config 2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	17	17	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1,0	sl2560,4	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

Table 5.4.1.1.5-3: OTA related test parameters

Parameter	Unit	Test 1	Test 2
Angle of arrival configuration		Setup 1 defined in A.9.1	
Assumption for UE beamsNote 6		Fine	
N_{oc} Note1	dBm/15kHzNote4	-112	
N_{oc} Note1	dBm/SCSNote3	-100	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRPNote2	dBm/SCS Note4	-96	
$\hat{E}_s / I_{ot}$	dB	4	
IoNote2	dBm/95.04 MHz Note4	-68.5	

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: Void
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 5: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 5.4.1.1.5-4: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_e
2	120	60	N/A
		120	N/A
	240	60	N/A
		120	3.75*64*T_c
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 5.4.1.1.5-5: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (KHz)	The Maximum timing change in one adjustment T_q	The Minimum aggregate adjustment rate T_p	The Maximum aggregate adjustment rate T_q
2	120	3.125*64*T_c	-1.225*64*T_c	+3.725*64*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]				

Table 5.4.1.1.5-6: The Value of $N_{\text{TA offset}}$

Frequency range and band of cell used for uplink transmission	$N_{\text{TA offset}}$ (Unit: T_C)
FR2	13792
NOTE 1: The UE identifies $N_{\text{TA offset}}$ based on the information n-TimingAdvanceOffset as specified in TS 38.331 [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{\text{TA offset}}$ is set as 25600 for FR1 band. In case of multiple UL carriers in the same TAG, UE expects that the same value of n-TimingAdvanceOffset is provided for all the UL carriers according to clause 4.2 in TS 38.213 [3] and the value 39936 of $N_{\text{TA offset}}$ can also be provided for a FDD serving cell.	
NOTE 2: Void	

5.4.1.2 NR UE Transmit Timing Test with 2-TA for FR2 UE supporting multiDCI-IntraCellMultiTRP-TwoTA-r18

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC1, PC3

- The test is incomplete for UE power classes other than PC1 and PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.4.1.2.1 Test purpose

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits, for UE supporting *multiDCI-IntraCellMultiTRP-TwoTA-r18* and is configured with 2 TAGs for multi-DCI multi-TRP operation. UE is also configured with *dl-OrJointTCI-StateList* or *ul-TCI-State-List*. This test will verify the requirements in clause 7.1.2.

5.4.1.2.2 Test applicability

This test applies to all types of E-UTRA UE release 18 and forward supporting EN-DC FR2.

5.4.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.4.1.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.5.4.1.2

5.4.1.2.4 Test Description

5.4.1.2.4.1 Initial Conditions

Supported test configurations are shown in Table 5.4.1.2.1-1.

Table 5.4.1.2.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz

Configure the test equipment and the DUT according to the parameters in Table 5.4.1.2.4.1-2

Table 5.4.1.2.4.1-2: Initial conditions for EN-DC FR2 transmit timing accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.1.4.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5 4.1.2.4.3.

The test consists of E-UTRA PCell and NR PSCell. The configuration for E-UTRA is given in A.6.1.1-1. Tables 5.4.1.2.1-2 and 5.4.1.2.1-3 define the parameters to be configured and strength of the transmitted signals. The NR PSCell is configured with two TRPs in the test. Each TRP is associated with a CORESET, with coresetPoolIndex-r16 is set to 0 for the first TRP and set to 1 for the second TRP. UE is also configured with tag2 in ServingCellConfig. Two SRS resource sets are configured and associated to different TAGs via TCI state configuration. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table 5.4.1.2.5-3.

For UE not supporting the capability of “rxTimingDiff-r18”, the UE is only required to be tested in Test1 and Test3.

For UE supports the capability of “rxTimingDiff-r18”, the UE is only required to be tested in Test2 and Test4.

5.4.1.2.4.2 Test procedure

The test consists of E-UTRA PCell and NR PSCell. The downlink timing of the PSCell is changed and the changes in UE transmit timing are observed. The transmit timing is verified by the UE transmitting SRS used as a measurement reference facilitating the SS timing estimation.

The test sequence shall be carried out in RRC_CONNECTED for every test case. Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

Following will be the test sequence for this test

1) Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2) Set up E-UTRA PCell according to parameters given in Table A.6.1.1-1 and setup NR PSCell according to parameters given in Table 5.4.1.2.5-1.

3) The SS shall transmit an RRCConnectionReconfiguration message configuring the UE with the message content defined in clause 5.4.1.2.4.3.

4) The UE shall transmit RRCConnectionReconfigurationComplete message.

5) Set the UE in the Rx beam peak direction found with a 3D EIS scan as performed in Annex I.1 - I.3. Allow at least BEAM_SELECT_WAIT_TIME (NOTE 1) for the UE Rx beam selection to complete.

6) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB for each TAG.

a. The N_{TA} offset value (in T_c units) is 13792

b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 5.4.1.2.5-4.

7) The test system shall adjust the timing of the DL path by values given in Table A.5.4.1.2.2-1 for only TRP#1. The timing of the DL path of TRP#2 is not changed.

Table 5.4.1.2.2-1 Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1&Test2	Test3&Test4
240	$+8*64T_c$	$+4*64T_c$

8) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Clause 7.1.2 Table 7.1.2.1-1 of TS38.133 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first path (in time) of DL SSB of each TAG used by the UE to determine downlink timing is received from the reference cell at the UE antenna. For TRP#2, the test system shall verify there is no adjustment. Skip this step for Test 3 and Test 4 with DRX configured.

9) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first path (in time) of DL SSB of each TAG used by the UE to determine downlink timing is received from the reference cell at the UE antenna. For Test 3 and Test 4 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment

NOTE: The BEAM_SELECT_WAIT_TIME default value is defined in Annex K.1.1 in TS 38.521-2 [3].

5.4.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.4.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Specific message contents exceptions for Test Configuration 7.4.1.3-1	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.1 FR2

Table 5.4.1.2.4.3-2: SRS-Config for UE transmit timing accuracy for EN-DC FR2 UE

Derivation Path: TS 38.508-1 [14], Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {			
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {			
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	17		
}			
groupOrSequenceHopping	Neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
Sl2	0		Test 1
Sl2	1		Test 2
sl2560	4		Test 3
sl2560	9		Test 4
}			
}			
}			
}			
}			
}			

Table 5.4.1.2.4.3-3: DRX-Config for UE transmit timing accuracy Test 2 for EN-DC FR2

Derivation Path: TS 38.508-1 [14], Table 4.6.3-56			
Information Element	**Value/remark**	**Comment**	**Condition**
DRX-Config ::= CHOICE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms6		
}			
drx-InactivityTimer	ms1		
drx-HARQ-RTT-TimerDL	56		
drx-HARQ-RTT-TimerUL	56		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms320	0		
}			
shortDRX		NOT PRESENT	
}			

5.4.1.2.5 Test Requirements

Table 5.4.1.2.5-1: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1		Test2		Test3		Test4		Band Group
			TRP #1	TRP #2	TRP #1	TRP #2	TRP #1	TRP #2	TRP #1	TRP #2	
SSB ARFCN		1,2	Freq1								
Duplex Mode		1,2	TDD								
TDD configuration		1,2	TDDConf.3.1								
$BW_{channel}$	MHz	1,2	100: $N_{RB,c}$ = 66								
Data RBs allocated		1,2	66								
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1								
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1								
TRS Configuration		1,2	TRS.2.1 TDD TRS.2.2 TDD								
DRx Cycle	ms	1,2	N/A				DRX.8[Note5]				
PDSCH Reference measurement channel		1,2	SR.3. 3 TDD								
RMSI CORESET Reference Channel		1,2	CR.3.1 TDD								
coresetPoolIndex for dedicated CORESET Reference Channel		1,2	0	1	0	1	0	1	0	1	
Dedicated CORESET Reference Channel		1,2	CCR.3.4 TDD	CCR.3.6 TDD	CCR.3.4 TDD	CCR.3.6 TDD	CCR.3.4 TDD	CCR.3.6 TDD	CCR.3.4 TDD	CCR.3.6 TDD	
TCI configuration		1,2	DLorJointTCI.State.0 with tag-Id-ptr-r18 = n0	DLorJointTCI.State.1 with tag-Id-ptr-r18 = n1	DLorJointTCI.State.0 with tag-Id-ptr-r18 = n0	DLorJointTCI.State.1 with tag-Id-ptr-r18 = n1	DLorJointTCI.State.0 with tag-Id-ptr-r18 = n0	DLorJointTCI.State.1 with tag-Id-ptr-r18 = n1	DLorJointTCI.State.0 with tag-Id-ptr-r18 = n0	DLorJointTCI.State.1 with tag-Id-ptr-r18 = n1	
Timing difference compared to TRP#1	us	1,2	0	0.1	0	7	0	0.1	0	7	
OCNG Patterns		1,2	O P. 1								
SSB Configuration		1,2	SSB.1 FR2								

SMTC Configuration		1,2	SMTC.1		
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120		
EPRE ratio of PSS to SSS	dB	1,2	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
Propagation condition		1,2	AWGN		
SRS Config		1,2	SRSConf.1[Note6]	SRSConf.2[Note6]	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: DRx related parameters are given in Table A.3.3.8-1
Note 6: SRS configs are given in Table 5.4.1.2.5-3

Table 5.4.1.2.5-2: OTA related test parameters

Parameter	Unit	Test 1	Test 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams[Note 6]		Fine	
N_{oc} [Note1]	dBm/15kHz[Note4]	-112	
N_{oc} [Note1]	dBm/SCS[Note3]	-100	

$\hat{E}_s/N_{oc}$	dB	4
SSB_RP Note2	dBm/SCS Note4	-96
$\hat{E}_s/I_{ot}$	dB	4
Io Note2	dBm/95.04 MHz Note4	-68.5

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 5.4.1.2.5-3: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1		SRSConf.2		Comments
SRS-ResourceSet	srs-ResourceSetId	0	1	0	1	
	srs-ResourceIdList	0	1	0	1	
	resourceType	Periodic	Periodic	Periodic	Periodic	
	Usage	Codebook	Codebook	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	1	0	0	
	nrofSRS-Ports	Port1	Port1	Port1	Port1	
	transmissionComb	n2	n2	n2	n2	
	combOffset-n2	0	0	0	0	
	cyclicShift-n2	0	0	0	0	
	resourceMapping startPosition	0	0	0	0	
	resourceMapping nrofSymbols	n1	n1	n1	n1	
	resourceMapping repetitionFactor	n1	n1	n1	n1	
	freqDomainPosition	0	0	0	0	
	freqDomainShift	0	0	0	0	
	freqHopping c-SRS	17	17	17	17	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	0	0	
	freqHopping b-hop	0	0	0	0	
	groupOrSequenceHopping	Neither	Neither	Neither	Neither	
	resourceType	Periodic	Periodic	Periodic	Periodic	
	periodicityAndOffset-p	sl2, 0	sl2, 1	sl2560, 4	sl2560, 9	Offset to align with DRx periodicity
	sequenceId	0	0	0	0	Any 10 bit number
	TCI state	DLorJoint TCI.State.0	DLorJoint TCI.State.1	DLorJoint TCI.State.0	DLorJoint TCI.State.1	

Table 5.4.1.2.5-4: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_e
2	120	60	N/A
		120	N/A
	240	60	N/A
		120	3.75*64*T_c
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 5.4.1.2.5-5: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (KHz)	The Maximum timing change in one adjustment T_q	The Minimum aggregate adjustment rate T_p	The Maximum aggregate adjustment rate T_q
2	120	3.125*64*T_c	-1.225*64*T_c	+3.725*64*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]				

Table 5.4.1.2.5-6: The Value of $N_{\text{TA offset}}$

Frequency range and band of cell used for uplink transmission	$N_{\text{TA offset}}$ (Unit: T_C)
FR2	13792
NOTE 1: The UE identifies $N_{\text{TA offset}}$ based on the information n-TimingAdvanceOffset as specified in TS 38.331 [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{\text{TA offset}}$ is set as 25600 for FR1 band. In case of multiple UL carriers in the same TAG, UE expects that the same value of n-TimingAdvanceOffset is provided for all the UL carriers according to clause 4.2 in TS 38.213 [3] and the value 39936 of $N_{\text{TA offset}}$ can also be provided for a FDD serving cell.	
NOTE 2: Void	

5.4.2 UE timer accuracy

FFS

5.4.3 Timing advance

5.4.3.0 Minimum conformance requirements

5.4.3.0.1 Minimum conformance requirements for timing advance adjustment accuracy

The timing advance is initiated from gNB with MAC message that implies and adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [12].

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 5.4.3.0.3-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS38.213 [8].

Table 5.4.3.0.3-1: UE Timing Advance adjustment accuracy

Sub Carrier Spacing, SCS kHz	15	30	60	120
UE Timing Advance adjustment accuracy	±256 T_c	±256 T_c	±128 T_c	±32 T_c

The normative reference for this requirement is TS.38.133 [6] clause A.5.4.3.

5.4.3.1 EN-DC FR2 timing advance adjustment accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC1, PC3

- The test is incomplete for UE power classes other than PC1 and PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.4.3.1.1 Test purpose

The purpose of the test is to verify UE timing advance adjustment delay and accuracy requirement defined in clause 7.3 of TS 38.133 [6].

5.4.3.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

5.4.3.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 5.4.3.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.5.4.3.1.

5.4.3.1.4 Test description

5.4.3.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2 [17].

This test shall be tested using any of the test configurations in Table 5.4.3.1.4.1-1.

Table 5.4.3.1.4.1-1: EN-DC FR2 timing advance adjustment accuracy supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.4.3.1.4.1-2

Table 5.4.3.1.4.1-2: Initial conditions for EN-DC FR2 timing advance adjustment accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, E.1.2, and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and clause 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.4.3.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 5.4.3.1.4.1-3: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		Cell 1: 1 Cell 2: 2	1 for E-UTRAN PCell 2 for NR PSCell
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1 of TS 38.133 [6]
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1 of TS 38.133 [6]

Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1 of TS 38.133 [6]
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1 of TS 38.133 [6]
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	$N_{TA_new} = N_{TA_old} + 1024*T_c$ (based on equation in TS 38.213 [3] clause 4.2)
T1	s	5	
T2	s	5	

1. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.1.

2. Downlink signals for NR cell are initially set up according to clause C.1.2, C.1.3.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.4.3.1.4.2 Test Procedure

The test consists of two cells, a single E-UTRA cell (PCell), and a single NR cell (PSCell). Cell 1 is the PCell in the primary Timing Advance Group (pTAG) and cell 2 is the PSCell is in the secondary Timing Advance Group (sTAG). The test consists of two successive time periods, with time durations of T1 and T2 respectively. In each time period, timing advance commands for sTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in Table 5.4.3.1.5-1 and Table 5.4.3.1.5-2, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PSCell in sTAG. The UE Time Alignment Timer (timeAlignmentTimer IE), described in Clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Message content are defined in clause 5.4.3.1.2.3.

2. Set the parameters according to values in Tables 5.4.3.1.4.1-3 and Table 5.4.3.1.5-1 as appropriate. Propagation conditions are set according to clause C.2.2.

3. SS shall transmit an RRCConnectionReconfiguration message.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for sTAG, as specified in Clause 6.1.3.4 in TS 38.321. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for sTAG used by the UE is established.

6. During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value of 39 as specified in table 5.4.3.1.4.1-3.

7. This value shall result in changes of the timing advance for sTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

8. As specified in Clause 7.3.2.1 of TS 38.133 [6], the UE adjusts its uplink timing at slot n+k+1 for a timing advance command received in slot n. This delay shall be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

9. The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

10. The result from the SRS and adjustment of the timing advance in step 7) is used to measure that the UE adjusts the timing of its transmission with a relative accuracy better than or equal to value specified in Table 5.4.3.0.3-1 to the signalled timing advance value compared to the timing of preceding uplink transmission.

11. If the UE adjust the timing of its transmission within a relative accuracy greater than or equal to value specified in Table 5.4.3.0.3-1 to the signalled timing advance value compared to the timing of preceding uplink transmission then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

12. The SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

13. The SS then shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

14. If any of the above Reconfiguration in Step 12 or 13 fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

15. Repeat steps 3-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.4.3.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3, with the following exceptions:

Table 5.4.3.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1

Table 5.4.3.1.4.3-1: srs-Config setup

Derivation Path: TS 38.508-1, Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {	1 entry		
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {	1 entry		
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	16		
}			
groupOrSequenceHopping	Neither		
resourceType CHOICE {			
periodic SEQUENCE {	Periodic		
periodicityAndOffset-p CHOICE {			
sl5	4		
}			
}			
}			
}			

}			
}			

5.4.3.1.5 Test Requirement

The UE shall apply the signalled Timing Advance value for PSCell in sTAG to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where *k* = 11.

The Timing Advance adjustment accuracy for PSCell in sTAG shall be within the limits specified in Table 5.4.3.1.5-3.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90% with a confidence level of 95%.

Table 5.4.3.1.5-1, Table 5.4.3.1.5-1a and Table 5.4.3.1.5-2 define the primary level settings.

Table 5.4.3.1.5-1: Cell specific test parameters for timing advance

Parameter	Unit	Test1	
		T1	T2
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
BWP BW	MHz	100: $N_{RB,c}$ = 66	
DRx Cycle	ms	Not Applicable	
PDSCH Reference measurement channel		SR.3.1 TDD	
CORESET Reference Channel		CR.3.1 TDD	
TRS configuration		TRS.2.1 TDD	
PDSCH/PDCCH TCI state		TCI.State.2	
OCNG Patterns		OCNG pattern 1	
SMTC configuration		SMTC.1	
SSB configuration		SSB.3 FR2	
PDSCH/PDCCH subcarrier spacing	kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	kHz	120 kHz	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition	-	AWGN	
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 5.4.3.1.5-1a: OTA specific test parameters for timing advance

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1	
Assumption for UE beams[Note 6]		Fine	
N_{oc} [Note1]	dBm/15kHz[Note4]	-112	
N_{oc} [Note1]	dBm/SCS[Note3]	-103	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRP[Note2]	dBm/SCS [Note4]	-99	
$\hat{E}_s / I_{ot}$	dB	4	

Io[Note2]	dBm/95.04 MHz [Note4]	-68.53
NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
NOTE 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
NOTE 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone		
NOTE 5: As observed with 0dBi gain antenna at the centre of the quiet zone		
NOTE 6: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation		

Table 5.4.3.1.5-2: Sounding Reference Symbol Configuration for timing advance

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
NOTE: For further information see clause 6.3.2 in TS 38.331 [13].		

Table 5.4.3.1.5-3: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	60	120
UE Timing Advance adjustment accuracy	±128 T_c	±72 T_c

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.5 Signaling characteristics

5.5.1 Radio link monitoring

The requirements in this clause apply for radio link monitoring on PSCell in EN-DC operation mode. The UE shall monitor the downlink link quality based on the reference signal in the configured RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell and PSCell as specified in TS 38.213 [8]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell.

5.5.1.0 Minimum conformance requirements

5.5.1.0.1 Minimum conformance requirements for out-of-sync SSB-based RLM

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB}$ [ms] period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB}$ [ms] evaluation period. The requirements in this clause apply for each SSB based RLM-RS resource configured for PSCell, provided that the SSB configured for RLM is transmitted within UE active DL BWP during the entire evaluation period defined in Table 5.5.1.0.1-1.

$T_{Evaluate_out_SSB}$ is defined in Table 5.5.1.0.1-1 for FR2.

Table 5.5.1.0.1-1: Evaluation period $T_{Evaluate_out}$ for FR2

Configuration	$T_{Evaluate_out_SSB}$ (ms)
no DRX	max(200,ceil(10*P*N)*T_{SSB})
DRX cycle≤320	max(200,ceil(15*P*N)*max(T_{DRX},T_{SSB}))
DRX cycle>320	ceil(10*P*N)*T_{DRX}
NOTE: T_{SSB} is the periodicity of SSB configured for RLM. T_{DRX} is the DRX cycle length.	

For FR2,

- P=1/(1 – T_{SSB}/$T_{SMTCperiod}$), when RLM-RS is not overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion (T_{SSB} < $T_{SMTCperiod}$).
- P is 3, when RLM-RS is not overlapped with measurement gap and RLM-RS is fully overlapped with SMTC period (T_{SSB} = $T_{SMTCperiod}$).
- P is 1/(1- T_{SSB}/MGRP - T_{SSB}/$T_{SMTCperiod}$), when RLM-RS is partially overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion (T_{SSB} < $T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
- $T_{SMTCperiod}$ ≠ MGRP or
- $T_{SMTCperiod}$ = MGRP and T_{SSB} < 0.5*$T_{SMTCperiod}$
- P is 1/(1- T_{SSB} /MGRP)*3, when RLM-RS is partially overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion (T_{SSB} < $T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and T_{SSB} = 0.5*$T_{SMTCperiod}$
- P is 1/{1- T_{SSB} /min ($T_{SMTCperiod}$,MGRP)}, when RLM-RS is partially overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion (T_{SSB} < $T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap
- P is 1/(1- T_{SSB} /MGRP)*3, when RLM-RS is partially overlapped with measurement gap and RLM-RS is fully overlapped with SMTC occasion (T_{SSB} = $T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

The normative reference for this requirement is TS 38.133 [6] clauses 8.1.2.

5.5.1.0.2 Minimum conformance requirements for in-sync SSB-based RLM

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB}$ [ms] period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_SSB}$ [ms] period becomes better than the threshold Q_{in_SSB} within $T_{Evaluate_in_SSB}$ [ms] evaluation period.

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in Table 8.1.2.2-1 for FR1.

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in Table 8.1.2.2-2 for FR2 with scaling factor N=8.

For FR2,

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when RLM-RS is not overlapped with measurement gap and the RLM-RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).

- P is $P_{sharing\ factor}$, when the RLM-RS is not overlapped with measurement gap and RLM-RS is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{SSB}}{MRGP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS is partially overlapped with measurement gap and the RLM-RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5*T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MRGP}}$, when the RLM-RS is partially overlapped with measurement gap and the RLM-RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5*T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{SSB}}{Min(MRGP,T_{SMTCperiod})}}$, when the RLM-RS is partially overlapped with measurement gap and the RLM-RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MRGP}}$, when the RLM-RS is partially overlapped with measurement gap and the RLM-RS is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} <$ MGRP)

- $P_{sharing\ factor} = 1$

  - if all of the reference signals configured for RLM outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or

  - if all of the reference signal configured for RLM outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped by with the SSB symbols indicated by SSB-ToMeasure and 1 symbol before each consecutive SSB symbols indicated by SSB-ToMeasure and 1 symbol after each consecutive SSB symbols indicated by SSB-ToMeasure, given that SSB-ToMeasure is configured;

- $P_{sharing\ factor} = 3$, otherwise.

If the high layer in TS 38.331 [2] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Longer evaluation period would be expected if the combination of RLM-RS, SMTC occasion and measurement gap configurations does not meet previous conditions.

Table 5.5.1.0.2-1: Evaluation period $T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ for FR2

Configuration	$T_{Evaluate_out_SSB}$ (ms)	$T_{Evaluate_in_SSB}$ (ms)
no DRX	Max(200, Ceil(10*P*N)*T_{SSB})	Max(100, Ceil(5*P*N)*T_{SSB})
DRX cycle≤320	Max(200, Ceil(15*P*N)*Max(T_{DRX},T_{SSB}))	Max(100, Ceil(7.5*P*N)*Max(T_{DRX},T_{SSB}))
DRX cycle>320	Ceil(10*P*N)*T_{DRX}	Ceil(5*P*N)*T_{DRX}
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

Figure 5.5.1.2.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.1.0.3 Minimum conformance requirements for out-of-sync CSI-RS based RLM

[TS38.133, clause 8.1.3.1]

The requirements apply for each CSI-RS based RLM-RS resource configured for PSCell, provided that the CSI-RS configured for RLM are actually transmitted within UE active DL BWP during the entire evaluation period specified in TS 38.133, clause 8.1.3.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

Table 5.5.1.0.3-1: PDCCH transmission parameters for out-of-sync

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	4dB
Bandwidth (MHz)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

[TS38.133, clause 8.1.3.2]

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI-RS}$ [ms] period becomes worse than the threshold Q_{out_CSI-RS} within $T_{Evaluate_out_CSI-RS}$ [ms] evaluation period.

- $T_{Evaluate_out_CSI-RS}$ is defined in Table 5.5.1.0.3-2 for FR2 with N=1. The requirements of $T_{Evaluate_out_CSI-RS}$ applies provided that the CSI-RS for RLM is not in a resource set configured with repetition ON. The requirements doesn't apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for RLM and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR2,

- P=1, when RLM-RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P=1/(1 – T_{CSI-RS}/MGRP)$, when RLM-RS is partially overlapped with measurement gap and RLM-RS is not overlapped with SMTC occasion ($T_{CSI-RS} < MGRP$)
- $P=1/(1 – T_{CSI-RS} /T_{SMTCperiod})$, when RLM-RS is not overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).
- P is 3, when RLM-RS is not overlapped with measurement gap and RLM-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).
- P is $1/(1- T_{CSI-RS} /MGRP - T_{CSI-RS} /T_{SMTCperiod})$, when RLM-RS is partially overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

- $T_{SMTCperiod} \neq$ MGRP or
- $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} < 0.5*T_{SMTCperiod}$

- P is 1/(1- T_{CSI-RS} /MGRP)* 3, when RLM-RS is partially overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} = 0.5*T_{SMTCperiod}$
- P is 1/{1- T_{CSI-RS} /min ($T_{SMTCperiod}$,MGRP)}, when RLM-RS is partially overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap
- P is 1/(1- T_{CSI-RS} /MGRP)* 3, when RLM-RS is partially overlapped with measurement gap and RLM-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} <$ MGRP)

If the high layer in TS 38.331 [2] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

NOTE: The overlap between CSI-RS RLM and SMTC means that CSI-RS based RLM is within the SMTC window duration. Longer evaluation period would be expected if the combination of RLM-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

The value of M_{out} used in Table 5.5.1.0.3-2 is defined as:

- M_{out} = 20 if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* set to 3 and over the bandwidth $\geqslant$ 24 PRBs.

Table 5.5.1.0.3-2: Evaluation period $T_{Evaluate_out_CSI-RS}$ for FR2

Configuration	$T_{Evaluate_out_CSI-RS}$ (ms)
no DRX	max(200, ceil(M_{out}×P×N)×T_{CSI-RS})
DRX ≤ 320ms	max(200, ceil(1.5×M_{out}×P×N)× max(T_{DRX}, T_{CSI-RS}))
DRX > 320ms	ceil(M_{out}×P×N) × T_{DRX}
NOTE: T_{CSI-RS} is the periodicity of CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.	

[TS38.133, clause 8.1.3.3]

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM/BFD/CBD/L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM/BFD/L1-RSRP measurement, or in the same symbol as SSB for CBD when beam failure is detected, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR2, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM/BFD/CBD/L1-RSRP measurement,

- In the following cases, UE is required to measure one of but not both CSI-RS for RLM and the other CSI-RS. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.
  - The CSI-RS for RLM or the other CSI-RS in a resource set configured with repetition ON, or
  - The other CSI-RS is configured in q1 and beam failure is detected, or
  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for RLM without any restriction.

[TS38.133, clause 8.1.4 and 8.1.5]

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM-RS resources to a second configuration of RLM-RS resources that is different from the first configuration, for each RLM-RS resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM-RS resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for RLM present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331.

[TS38.133, clause 8.1.6]

When the downlink radio link quality on all the configured RLM-RS resources is worse than Q_{out}, Layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331.

The out-of-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213. Two successive indications from Layer 1 shall be separated by at least $T_{Indication_interval}$.

When DRX is not used $T_{Indication_interval}$ is max(10ms, $T_{RLM\text{-}RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1.2 if the RLM-RS resource is SSB, or $T_{CSI\text{-}RS}$ specified in clause 8.1.3 if the RLM-RS resource is CSI-RS.

In case DRX is used, $T_{Indication_interval}$ is max(10ms, 1.5*DRX_cycle_length, 1.5*$T_{RLM\text{-}RS,M}$) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and Layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

References: The conformance requirements covered in the current TC are specified in: TS 38.133 [6], clauses 8.1.3, 8.1.4, 8.1.5 and 8.1.6.

5.5.1.0.4 Minimum conformance requirements for in-sync CSI-RS based RLM

[TS38.133, clause 8.1.3.1]

The requirements apply for each CSI-RS based RLM-RS resource configured for PSCell, provided that the CSI-RS configured for RLM are actually transmitted within UE active DL BWP during the entire evaluation period specified in TS 38.133 clause 8.1.3.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

Table 5.5.1.0.4-1: PDCCH transmission parameters for in-sync

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4

Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	[0]dB
Bandwidth (MHz)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

[TS38.133, clause 8.1.3.2]

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_CSI\text{-}RS}$ [ms] period becomes better than the threshold $Q_{in_CSI\text{-}RS}$ within $T_{Evaluate_in_CSI\text{-}RS}$ [ms] evaluation period.

- $T_{Evaluate_in_CSI\text{-}RS}$ is defined in Table 5.5.1.0.4-2 for FR2 with N=1. The requirements of $T_{Evaluate_in_CSI\text{-}RS}$ applies provided that the CSI-RS for RLM is not in a resource set configured with repetition ON. The requirements doesn't apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for RLM and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR2,

- P=1, when RLM-RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P=1/(1 - T_{CSI\text{-}RS}/MGRP)$, when RLM-RS is partially overlapped with measurement gap and RLM-RS is not overlapped with SMTC occasion ($T_{CSI\text{-}RS} < MGRP$)
- $P=1/(1 - T_{CSI\text{-}RS} /T_{SMTCperiod})$, when RLM-RS is not overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion ($T_{CSI\text{-}RS} < T_{SMTCperiod}$).
- P is 3, when RLM-RS is not overlapped with measurement gap and RLM-RS is fully overlapped with SMTC occasion ($T_{CSI\text{-}RS} = T_{SMTCperiod}$).
- P is $1/(1- T_{CSI\text{-}RS} /MGRP - T_{CSI\text{-}RS} /T_{SMTCperiod})$, when RLM-RS is partially overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion ($T_{CSI\text{-}RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq MGRP$ or
  - $T_{SMTCperiod} = MGRP$ and $T_{CSI\text{-}RS} < 0.5*T_{SMTCperiod}$
- P is $1/(1- T_{CSI\text{-}RS} /MGRP)* 3$, when RLM-RS is partially overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion ($T_{CSI\text{-}RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{CSI\text{-}RS} = 0.5*T_{SMTCperiod}$
- P is $1/\{1- T_{CSI\text{-}RS} /\min (T_{SMTCperiod} ,MGRP)\}$, when RLM-RS is partially overlapped with measurement gap and RLM-RS is partially overlapped with SMTC occasion ($T_{CSI\text{-}RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap
- P is $1/(1- T_{CSI\text{-}RS} /MGRP)* 3$, when RLM-RS is partially overlapped with measurement gap and RLM-RS is fully overlapped with SMTC occasion ($T_{CSI\text{-}RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)

If the high layer in TS 38.331 [2] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

NOTE: The overlap between CSI-RS RLM and SMTC means that CSI-RS based RLM is within the SMTC window duration. Longer evaluation period would be expected if the combination of RLM-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

The values of M_{in} used in Table 5.5.1.0.4-2 are defined as:

- M_{in} = 10, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* set to 3 and over the bandwidth $\geqslant$ 24 PRBs.

Table 5.5.1.0.4-2: Evaluation period $T_{Evaluate_in_CSI\text{-}RS}$ for FR2

Configuration	$T_{Evaluate_in_CSI\text{-}RS}$ (ms)
no DRX	max(100, ceil(M_{in}×P×N) × $T_{CSI\text{-}RS}$)
DRX ≤ 320ms	max(100, ceil(1.5×M_{in}×P×N)× max(T_{DRX}, $T_{CSI\text{-}RS}$))
DRX > 320ms	ceil(M_{in}×P×N) × T_{DRX}
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource configured for RLM. The requirements in this table apply for $T_{CSI\text{-}RS}$ equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.	

[TS38.133, clause 8.1.3.3]

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM/BFD/CBD/L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM/BFD/L1-RSRP measurement, or in the same symbol as SSB for CBD when beam failure is detected, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR2, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM/BFD/CBD/L1-RSRP measurement,

- In the following cases, UE is required to measure one of but not both CSI-RS for RLM and the other CSI-RS. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.
  - The CSI-RS for RLM or the other CSI-RS in a resource set configured with repetition ON, or
  - The other CSI-RS is configured in q1 and beam failure is detected, or
  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for RLM without any restriction.

[TS38.133, clause 8.1.4 and 8.1.5]

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM-RS resources to a second configuration of RLM-RS resources that is different from the first configuration, for each RLM-RS resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM-RS resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for RLM present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [2].

[TS38.133, clause 8.1.6]

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than Q_{in}, Layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A Layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from Layer 1 shall be separated by at least $T_{Indication_interval}$.

When DRX is not used $T_{Indication_interval}$ is max(10ms, $T_{RLM\text{-}RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1.2 if the RLM-RS resource is SSB, or $T_{CSI\text{-}RS}$ specified in clause 8.1.3 if the RLM-RS resource is CSI-RS.

In case DRX is used, $T_{Indication_interval}$ is max(10ms, 1.5*DRX_cycle_length, 1.5*$T_{RLM\text{-}RS,M}$) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and Layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

References: The conformance requirements covered in the current TC are specified in: TS 38.133 [6], clauses 8.1.3, 8.1.4, 8.1.5 and 8.1.6.

5.5.1.0.5 Minimum conformance requirements for UE scheduling restrictions during radio link monitoring

The following scheduling restriction applies due to radio link monitoring on an FR2 serving PCell and/or PSCell.

- If the RLM-RS is CSI-RS which is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON,
  - There are no scheduling restrictions due to radio link monitoring based on the CSI-RS.
- Otherwise
  - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on FR2 serving PCell or PSCell applies to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cell(s) in the bands due to radio link monitoring performed on FR2 serving PCell or PSCell in different bands, provided that UE is capable of independent beam management on this FR2 band pair.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for RLM; and

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for RLM.

5.5.1.0.6 Requirements for UE configured with Relaxed Measurement Criteria

Same requirements apply as in clause 4.5.1.0.5.

5.5.1.0.6.1 Minimum requirement of SSB based radio link monitoring for UE fulfilling relaxed measurement criteria

[TS 38.133, clause 8.1.2.4]

This clause contains minimum requirements for relaxed radio link monitoring based on SSB.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB_Relax}$ [ms] period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB_Relax}$ [ms] evaluation period.

$T_{Evaluate_out_SSB_Relax}$ is defined in Table 5.5.1.0.6.1-1 for FR2 with scaling factor N=8.

The value of P is defined in clause 5.5.1.0.12.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 5.5.1.0.6.1-1: Evaluation period $T_{Evaluate_out_SSB_Relax}$ for FR2

Configuration	$T_{Evaluate_out_SSB_Relax}$ (ms)
$Max(T_{DRX},T_{SSB}) \leq 80ms$	$Max(200 \times K4^{NOTE3}, Ceil(15 \times K2^{NOTE2} \times P \times N) \times Max(T_{DRX},T_{SSB}))$
$80ms < Max(T_{DRX},T_{SSB}) \leq 160ms$	$Ceil(15 \times P \times N) \times Max(T_{DRX},T_{SSB})$
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length and no longer than 80ms. NOTE 2: K2 = 2. NOTE 3: K4 = K2, if K2 ≤ 2; otherwise K4 = 1.	

5.5.1.1 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- Normal conditions

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test is incomplete for extreme conditions

5.5.1.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the PSCell configured with SSB-based RLM RS in non-DRX mode. This test will partly verify the NR cell radio link monitoring requirements in TS 38.133 [6] clause 8.1.2.

5.5.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

5.5.1.1.3 Minimum conformance requirement

The minimum requirements are specified in clause 5.5.1.0.1. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.1.1.

5.5.1.1.4 Test description

There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1 as defined in 38.133 [6]. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 5.5.1.1.4-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states and Figure 5.5.1.1.4-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms).

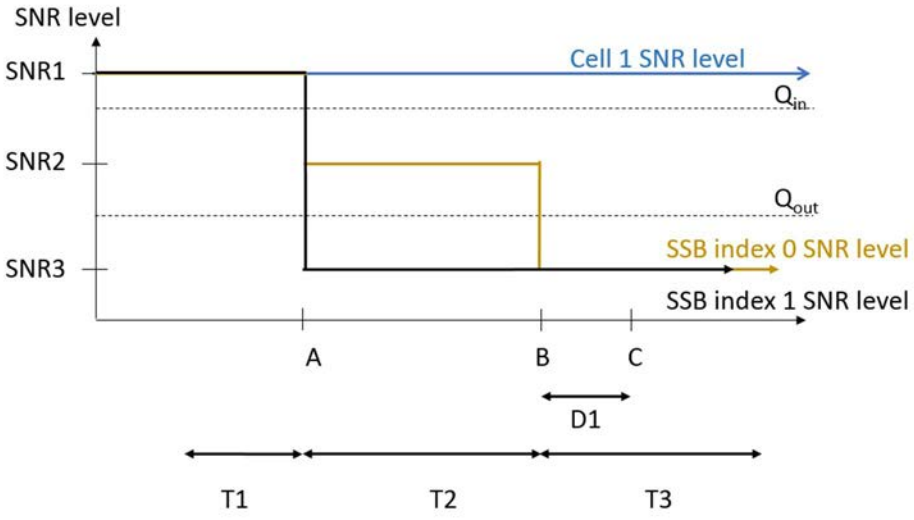

Figure 5.5.1.1.4-1: SNR variation for out-of-sync testing

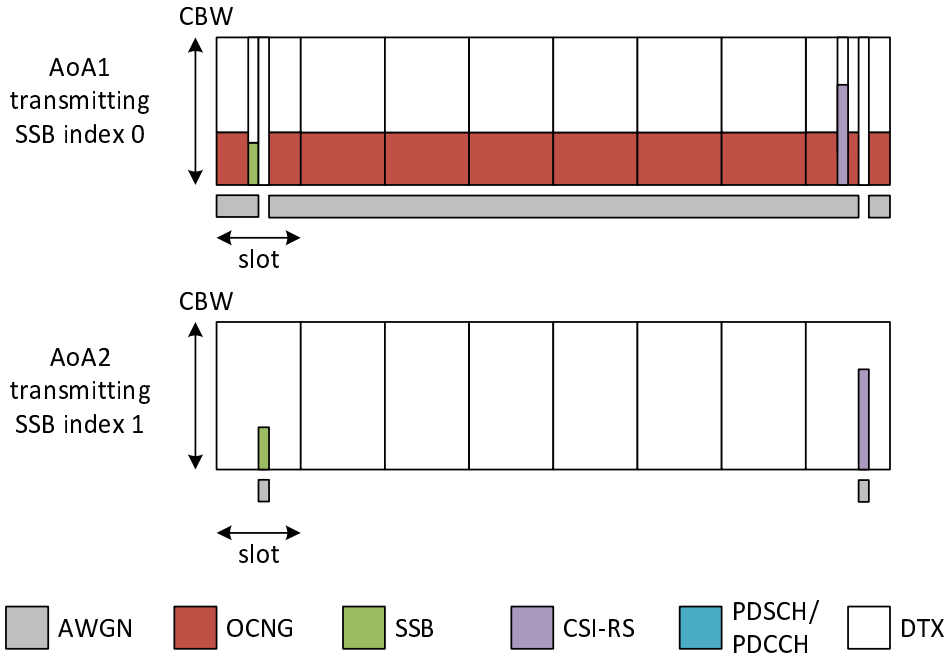

Figure 5.5.1.1.4-2: Time multiplexed downlink transmissions

5.5.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2 [18].

This test shall be tested using any of the test configurations in Table 5.5.1.1.4.1-1.

Table 5.5.1.1.4.1-1: EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode supported test configurations

Configuration	Description
5.5.1.1-1	FDD LTE PCell, NR 120 KHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.1.1-2	TDD LTE PCell, NR 120 KHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.1.1.4.1-2

Table 5.5.1.1.4.1-2: Initial conditions for EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.1.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

PDCCH transmission parameters are given in Table 5.5.1.1.4.1-4

Table 5.5.1.1.4.1-3: Void

1. Message contents are defined in clause 5.5.1.1.4.3.
2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2
3. The test parameters are given in Table 5.5.1.1.4.1-4 below.
4. Downlink signals for NR cell are initially set up according to Annex C.1.1 and C.1.2 for this test.

Table 5.5.1.1.4.1-4: General test parameters for FR2 out-of-sync testing in non-DRX mode

Parameter			Unit	Value
				Test 1
Active E-UTRA PCell				Cell 1
E-UTRA RF Channel Number				1
Active PSCell				Cell 2
RF Channel Number				2
Duplex mode		Config 1, 2		TDD
$BW_{channel}$		Config 1, 2		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1, 2		24
DL initial BWP configuration		Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2		DLBWP.1.1
UL initial BWP configuration		Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2		ULBWP.1.1
TDD Configuration		Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1, 2		CCR.3.4 TDD
SSB Configuration		Config 1, 2		SSB.1 FR2
SMTC Configuration		Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2		120 KHz
PRACH Configuration		Config 1, 2		PRACH.1 FR2
SSB index assigned as RLM RS		Config 1, 2		0,1
OCNG parameters				OP.5
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				*gp0*
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1, 2		CSI-RS.3.1 TDD Note 4

reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1, 2		TRS.2.1 TDD
T1		s	0.2
T2		s	9.68
T3		s	9.68
D1		s	9.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test. Note 4: CSI-RS.3.1 TDD uses 2 antenna ports, which implies the SS shall transmit signal on both polarizations.			

Table 5.5.1.1.4.1-5: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap).	

5.5.1.1.4.2 Test Procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 5.5.1.1.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [6] clause 5.5.

1a. The SS shall transmit an *RRCConnectionReconfiguration* message configuring the UE for inter-frequency measurements.

1b. The UE shall transmit *RRCReconfigurationComplete* message.

2. Set the parameters according to T1 in Table 5.5.1.1.4.4-1 for subtest 1 and 2. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.1.1.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.1.1.5-1. T3 starts.

5. If the SS:

a) detects uplink power in each subframe configured for CQI transmission (according to configured CQI periodicity on PUCCH [format 2]) during the period from time point A to time point B

and

b) does not detect any uplink power from time point C (D1 seconds after the start of T3) until T3 expires,

the number of successful tests is increased by one.

6. Otherwise the number of failed tests is increased by one and proceed to Step 10.

7. When T3 expires the SS shall change the SNR value to T1 as specified in Table 5.5.1.1.4.4-1.

8. If the UE has not re-established the connection in at least 1s, the SS shall ensure PSCell is released.

9. The SS then shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

10. If the Reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5].

11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.1.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.1.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier center of Adjacent range) Table H.3.1-4 with A3-offset = 0 Table H.3.4-1 Table H.3.4-1a Table H.3.4-4 with condition gapUE Table H.3.4-5 with condition BFD Table H.3.5-4 Table H.3.1-8 with Condition SSB RLM

Table 5.5.1.1.4.3-1: Void

Table 5.5.1.1.4.3-2: RLF-TimersAndConstants

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
UE-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

Table 5.5.1.1.4.3-3: Void

5.5.1.1.5 Test Requirement

Table 5.5.1.1.5-1 defines the cell specific primary level settings.

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

Table 5.5.1.1.5-1: OTA related cell specific test parameters for FR2 (Cell 2) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.9.3					
			AoA1			AoA2		
Assumption for UE beams[Note 5]			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1, 2	dB	4.1 Note 6	-3.9 Note 6	-15			
ssb-Index 1 SNR	Config 1, 2		Not sent			4.1 Note 6	-15	-15
N_{oc}	Config 1, 2	dBm/ 15kHz	-94.8			-94.8		
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure 5.5.1.1.4-2					
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is 38.133 [6] A.3.6.
Note 5: Information about types of UE beam is given in 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

5.5.1.2 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- Normal conditions

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test is incomplete for extreme conditions

5.5.1.2.1 Test Purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR2 PSCell radio link monitoring requirements in clause 8.1 of TS 38.133 [3].

5.5.1.2.2 Test Applicability

This test applies to all types of E-UTRA UEs Release 15 and forward supporting EN-DC FR2.

5.5.1.2.3 Minimum Conformance Requirements

The minimum requirements are specified in clause 5.5.1.0.2. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.1.2.

5.5.1.2.4 Test Description

There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.1.2.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states and Figure 5.5.1.2.4-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms.

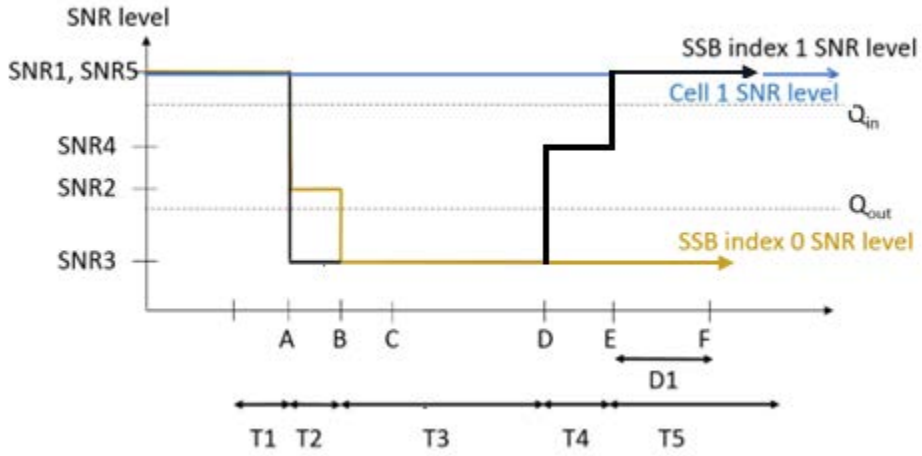

Figure 5.5.1.2.4-1: SNR variation for in-sync testing

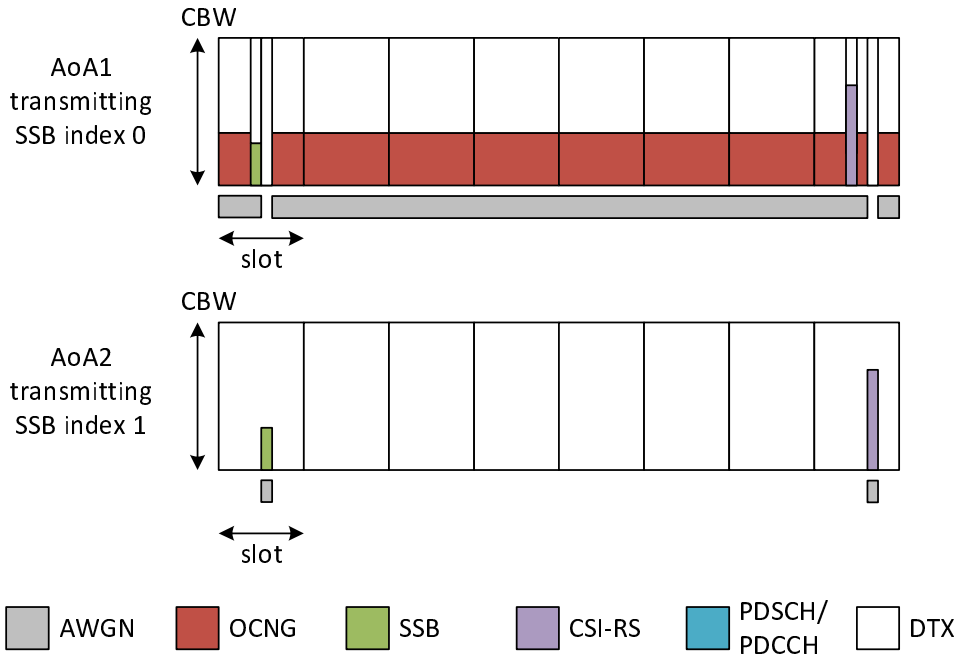

Figure 5.5.1.2.4-2: Time multiplexed downlink transmissions

5.5.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table [5.3.5-1] and Table 5.3.5-1 of 38.521-2 [18].

This test shall be tested using any of the test configurations in Table 5.5.1.2.4.1-1.

Table 5.5.1.2.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
5.5.1.2-1	FDD LTE PCell, NR 120 KHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.1.2-2	TDD LTE PCell, NR 120 KHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.1.2.4.1-2.

Table 5.5.1.2.4.1-2: Initial conditions for EN-DC FR2 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.1.3.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

PDCCH transmission parameters are given in Table 5.5.1.2.4.1-4.

Table 5.5.1.2.4.1-3: Void

1. Message contents are defined in clause 5.5.1.2.4.3.
2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2
3. The general test parameters are given in Table 5.5.1.2.5-4 below.
4. Downlink signals for NR cell are initially set up according to clause C.1.

Table 5.5.1.2.4.1-4: General test parameters for FR2 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 2		TDD
$BW_{channel}$	Config 1, 2		100: $N_{RB,c}$ = 66
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1

Parameter			Unit	Value
				Test 1
UL dedicated BWP configuration		Config 1, 2		ULBWP.1.1
TDD Configuration		Config 1, 2		TDDConf.3.1
CORESET Reference Channel		Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1, 2		CCR.3.1 TDD
SSB Configuration		Config 1, 2		SSB.1 FR2
SMTC Configuration		Config 1, 2		SMTC.3
PDSCH/PDCCH subcarrier spacing		Config 1, 2		120 KHz
PRACH Configuration		Config 1, 2		PRACH.1 FR2
SSB index assigned as RLM RS		Config 1, 2		0,1
OCNG parameters				OP.2
CP length				Normal
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	4000
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1, 2		CSI-RS.3.1 TDD NOTE 4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1, 2		TRS.2.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
T1			s	0.2
T2			s	0.2
T3			s	1.88
T4			s	0.2
T5			s	3.84
D1			s	3.8

NOTE 1: All configurations are assigned to the UE prior to the start of time period T1.
NOTE 2: UE-specific PDCCH is not transmitted after T1 starts.
NOTE 3: E-UTRAN is in non-DRX mode under test.
NOTE 4: CSI-RS.3.1 TDD uses 2 antenna ports, which implies the SS shall transmit signal on both polarizations.

5.5.1.2.4.2 Test procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 5.5.1.2.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [6] clause 4.5.

2. Set the parameters according to T1 in Table 5.5.1.2.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires, the SS shall change the SNR value to T2 as specified in Table 5.5.1.2.5-1. T2 starts.

4. When T2 expires, the SS shall change the SNR value to T3 as specified in Table 5.5.1.2.5-1. T3 starts.

5. When T3 expires, the SS shall change the SNR value to T4 as specified in Table 5.5.1.2.5-1. T4 starts.

6. When T4 expires, the SS shall change the SNR value to T5 as specified in Table 5.5.1.2.5-1. T5 starts.

7. If the SS detects uplink power in each subframe according the configured CQI reporting mode (PUCCH 2-0) during the period from time point A to time point F (D1 seconds after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.1.2.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions.

Table 5.5.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.5-4 Table H.3.1-8 with Condition SSB RLM

Table 5.5.1.2.4.3-2: Void

Table 5.5.1.2.4.3-3: *RLF-TimersAndConstant*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms4000		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

Table 5.5.1.2.4.3-4: Void

5.5.1.2.5 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90% with a 95% confidence interval.

Table 5.5.1.2.5-1: OTA related cell specific test parameters for FR2 (Cell 2) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1									
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup			Setup 3 defined in A.9.3									
			AoA1					AoA2				
Assumption for UE beams[Note 5]			Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0									
EPRE ratio of PBCH DMRS to SSS		dB										
EPRE ratio of PBCH to PBCH DMRS		dB										
EPRE ratio of PSS to SSS		dB										
EPRE ratio of PDSCH DMRS to SSS		dB										
EPRE ratio of PDSCH to PDSCH DMRS		dB										
EPRE ratio of OCNG DMRS to SSS		dB										
EPRE ratio of OCNG to OCNG DMRS		dB										
ssb-Index 0 SNR	Config 1, 2	dB	4.1 Note 6	-3.9 Note 6	-15	-15	-15					
ssb-Index 1 SNR	Config 1, 2		Not sent					4.1 Note 6	-15	-15	-4.5	4.1 Note 6
N_{oc}	Config 1, 2	dBm/ 15kHz	-94.8					-94.8				
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure 5.5.1.2.4-2									
Propagation condition			TDL-A 30ns 75Hz					TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is 38.133 [6] A.3.6.
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

5.5.1.3 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

5.5.1.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the PSCell configured with SSB-based RLM RS when DRX is used. This test will partly verify the NR cell radio link monitoring requirements in TS 38.133 [6] clause 8.1.2.

5.5.1.3.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

5.5.1.3.3 Minimum conformance requirement

The minimum requirements are specified in clause 5.5.1.0.1. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.1.3.

5.5.1.3.4 Test description

There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2 as defined in 38.133 [6]. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 5.5.1.3.4-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

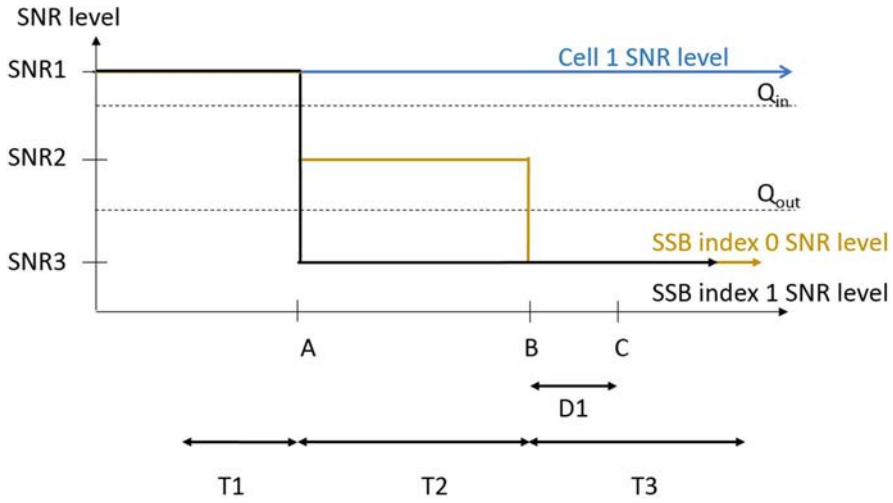

Figure 5.5.1.3.4-1: SNR variation for out-of-sync testing

5.5.1.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2 [18].

This test shall be tested using any of the test configurations in Table 5.5.1.3.4.1-1.

Table 5.5.1.3.4.1-1: EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode supported test configurations

Configuration	Description
5.5.1.3-1	FDD LTE PCell, NR 120 KHz SSB SCS, 100MHz bandwidth, TDD duplex mode

5.5.1.3-2	TDD LTE PCell, NR 120 KHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.1.3.4.1-2

Table 5.5.1.3.4.1-2: Initial conditions for EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.1.3.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

PDCCH transmission parameters are given in Table 5.5.1.3.4.1-4

Table 5.5.1.3.4.1-3: Void

1. Message contents are defined in clause 5.5.1.3.4.3.

2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2

3. The test parameters are given in Table 5.5.1.3.4.1-4 below.

4. Downlink signals for NR cell are initially set up according to Annex C.1.1 and C.1.2 for this test.

Table 5.5.1.3.4.1-4: General test parameters for FR2 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 2		TDD
$BW_{channel}$	Config 1, 2		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1, 2		66
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
TDD Configuration	Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.3.4 TDD
SSB Configuration	Config 1, 2		SSB.1 FR2
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		120 KHz
PRACH Configuration	Config 1, 2		PRACH.1 FR2

SSB index assigned as RLM RS	Config 1, 2		0,1
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1, 2		TRS.2.1 TDD
T1		s	0.2
T2		s	14.48
T3		s	14.48
D1		s	14.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

5.5.1.3.4.2 Test Procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 5.5.1.3.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [6] clause 5.5.

2. Set the parameters according to T1 in Table 5.5.1.3.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.1.3.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.1.3.5-1. T3 starts.

5. If the SS:

   a) detects uplink power in the On-Duration part of every DRX cycle in each subframe configured for CQI transmission (according to configured CQI periodicity on PUCCH [format 2]) during the period from time point A to time point B

and

   b) does not detect any uplink power from time point C (D1 after the start of T3) until T3 expires,

   the number of successful tests is increased by one.

6. Otherwise the number of failed tests is increased by one and proceed to Step 10.

7. When T3 expires the SS shall change the SNR value to T1 as specified in Table 5.5.1.3.4.4-1.

8. If the UE has not re-established the connection in at least 1s, the SS shall ensure PSCell is released.

9. The SS then shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

10. If the Reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5].

11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.1.3.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with condition “Short_DCI” and with the following exceptions:

Table 5.5.1.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.1-8 with Condition SSB RLM Table H.3.7-1 with condition DRX.3

Table 5.5.1.3.4.3-2: Void

Table 5.5.1.3.4.3-3: RLF-TimersAndConstants

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
UE-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

Table 5.5.1.3.4.3-4: Void

Table 5.5.1.3.4.3-5: CSI-ReportConfig

Derivation Path: Table H.3.5-4			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig ::= CHOICE {			
slots40	4		
}			
pucch-CSI-ResourceList SEQUENCE (SIZE (1..maxNrofBWPs)) OF{			
PUCCH_CSI_Resource[0] SEQUENCE {			
uplinkBandwidthPartId	BWP-Id		

pucch_Resource	9		
}			
}			
}			
}			
}			

5.5.1.3.5 Test Requirement

Table 5.5.1.3.5-1 defines the cell specific primary level settings.

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

Table 5.5.1.3.5-1: OTA related cell specific test parameters for FR2 (Cell 2) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup			Setup 1 defined in A.9.1		
Assumption for UE beams[Note 5]			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
ssb-Index 0 SNR	Config 1, 2	dB	3.3[Note 6]	-4.7[Note 6]	-15.4
ssb-Index 1 SNR	Config 1, 2		3.3[Note 6]	-15.4	-15.4
N_{oc}	Config 1, 2	dBm/15K Hz	-104.7dBm		
Propagation condition			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is TS 38.133 [6] A.3.6.
Note 5: Information about types of UE beam is given in TS 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

5.5.1.4 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test is incomplete for extreme conditions

5.5.1.4.1 Test Purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell with DRX configured. This test will partly verify the FR2 PSCell radio link monitoring requirements in clause 8.1.

5.5.1.4.2 Test Applicability

This test applies to all types of E-UTRA UEs Release 15 and forward supporting EN-DC

5.5.1.4.3 Minimum Conformance Requirements

The minimum requirements are specified in clause 5.5.1.0.2. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.1.2.

5.5.1.4.4 Test Description

5.5.1.4.4 Test Description

There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

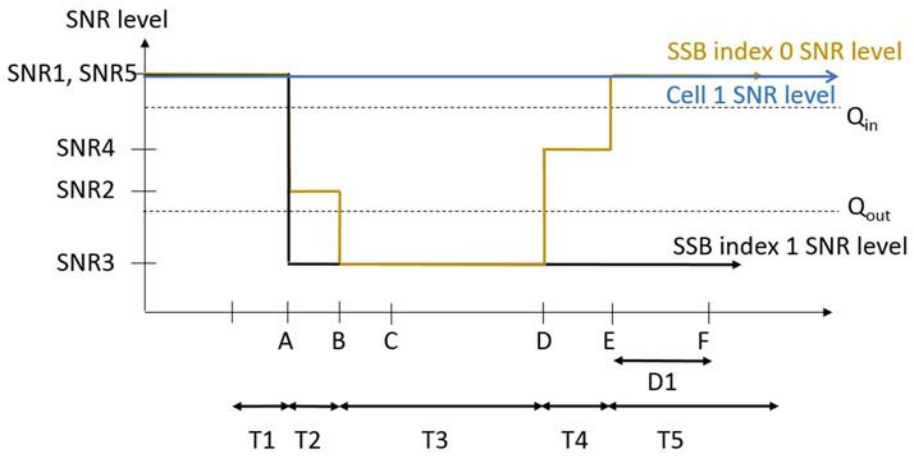

Figure 5.5.1.4.4-1: SNR variation for in-sync testing

5.5.1.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table [5.3.5-1] and Table 5.3.5-1 of 38.521-2 [18].

This test shall be tested using any of the test configurations in Table 5.5.1.4.4.1-1.

Table 5.5.1.4.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
5.5.1.4-1	FDD LTE PCell, NR 120 KHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.1.4-2	TDD LTE PCell, NR 120 KHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.1.4.4.1-2.

Table 5.5.1.4.4.1-2: Initial conditions for EN-DC FR2 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.1.3.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

PDCCH transmission parameters are given in Table 5.5.1.4.4.1-4.

Table 5.5.1.4.4.1-3: Void

1. Message contents are defined in clause 5.5.1.4.4.3.
2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2
3. The general test parameters are given in Table 5.5.1.4.5-4 below.
4. Downlink signals for NR cell are initially set up according to clause C.1.

Table 5.5.1.4.4.1-4: General test parameters for FR2 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 2		TDD
$BW_{channel}$	Config 1, 2		100: $N_{RB,c}$ = 66
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
TDD Configuration	Config 1, 2		TDDConf.3.1

Parameter			Unit	Value
				Test 1
RMSI CORESET Reference Channel		Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1, 2		CCR.3.1 TDD
SSB Configuration		Config 1, 2		SSB.1 FR2
SMTC Configuration		Config 1, 2		SMTC.3
PDSCH/PDCCH subcarrier spacing		Config 1, 2		120 KHz
PRACH Configuration		Config 1, 2		PRACH.1 FR2
SSB index assigned as RLM RS		Config 1, 2		0,1
OCNG parameters				OP.1
CP length				Normal
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.11
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	4000
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1, 2		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1, 2		TRS.2.1 TDD
T1			s	0.2
T2			s	0.2
T3			s	2.8
T4			s	0.2
T5			s	3.88
D1			s	3.84
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 3: E-UTRAN is in non-DRX mode under test.				

5.5.1.4.4.2 Test procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 5.5.1.4.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [6] clause 4.5.

2. Set the parameters according to T1 in Table 5.5.1.4.4-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires, the SS shall change the SNR value to T2 as specified in Table 5.5.1.4.5-1. T2 starts.

4. When T2 expires, the SS shall change the SNR value to T3 as specified in Table 5.5.1.4.5-1. T3 starts.

5. When T3 expires, the SS shall change the SNR value to T4 as specified in Table 5.5.1.4.5-1. T4 starts.

6. When T4 expires, the SS shall change the SNR value to T5 as specified in Table 5.5.1.4.5-1. T5 starts.

7. If the SS detects uplink power in the On-duration part of every DRX cycle in the subframe according the configured CQI reporting mode (PUCCH 2-0) during the period from time point A to time point F (D1after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.1.4.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with condition “Short_DCI” and with the following exceptions.

Table 5.5.1.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.1-8 with Condition SSB RLM Table H.3.7-1 with condition DRX.11

Table 5.5.1.4.4.3-2: Void

Table 5.5.1.4.4.3-3: *RLF-TimersAndConstant*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms4000		
n310	n1		
n311	n1		
t311	ms1000		
}			

Table 5.5.1.4.4.3-4: Void

Table 5.5.1.4.4.3-5: CSI-ReportConfig

Derivation Path: Table H.3.5-4			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig ::= CHOICE {			
slots40	4		
}			

pucch-CSI-ResourceList SEQUENCE (SIZE (1..maxNrofBWPs)) OF{			
PUCCH_CSI_Resource[0] SEQUENCE {			
uplinkBandwidthPartId	BWP-Id		
pucch_Resource	9		
}			
}			
}			
}			
}			

5.5.1.4.5 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90% with a 95% confidence interval.

Table 5.5.1.4.5-1: OTA related cell specific test parameters for FR2 (Cell 2) for in-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.9.1				
Assumption for UE beams Note 5			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
ssb-Index 0 SNR	Config 1, 2	dB	3.3 Note 6	-4.7 Note 6	-15.4	-4.9	3.3 Note 6
ssb-Index 1 SNR	Config 1, 2		3.3 Note 6	-15.4	-15.4	-15.4	-15.4
N_{oc}	Config 1, 2	dBm/15 KHz	-104.7dBm				
Propagation condition			TDL-A 30ns 75Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.3
NOTE 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is TS 38.133 [6] A.3.6.
Note 5: Information about types of UE beam is given in 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

5.5.1.5 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- TT analysis is made at Test frequency f ≤ 40.8 GHz

- Connection diagram is TBD

- Test Procedure and message contents will need further editing and review

5.5.1.5.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS Out-of-sync radio link monitoring requirements in TS 38.133 clause 8.1.

5.5.1.5.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and CSI-RS based RLM.

5.5.1.5.3 Minimum conformance requirements

The minimum requirements are specified in clause 5.5.1.0.3. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.1.5.

5.5.1.5.4 Test description

There are two cells configured in this test, the E-UTRA PCell and NR PSCell. This test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 5.5.1.5.4-1 shows the three different time durations and the corresponding variation of the downlink SNR in the active cell to emulate out-of-sync states.

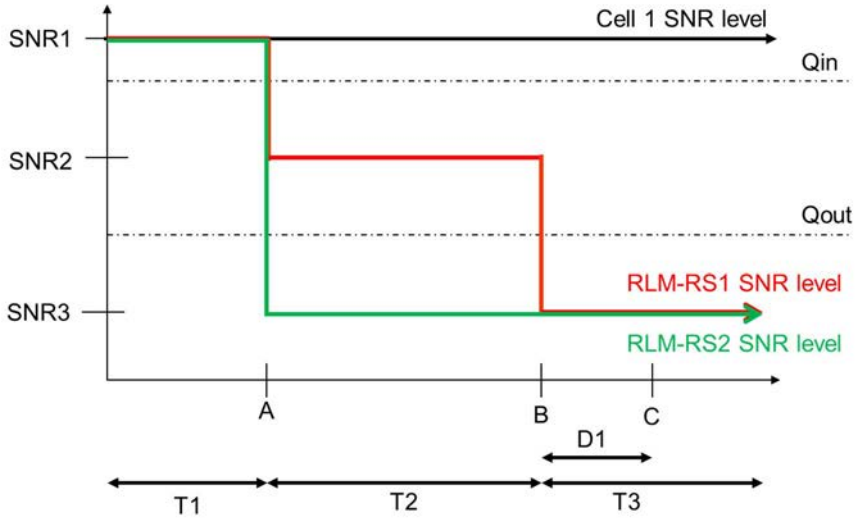

Figure 5.5.1.5.4-1: SNR variation for out-of-sync testing

5.5.1.5.4.1 Initial conditions

Test 5.5.1.5 can be run in one of the configurations defined in Table 5.5.1.5.4.1-1.

Table 5.5.1.5.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
5.5.1.5-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.1.5-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.1.5.4.1-2

Table 5.5.1.5.4.1-2: Initial conditions for CSI-RS In-sync radio link monitoring in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram	N/A		

1. The test parameters are given in Table 5.5.1.5.4.1-3 below.

2. Message contents are defined in clause 5.5.1.5.4.3.

3. There are two cells in the test, where Cell 1 is the E-UTRAN PCell on the E-UTRA carrier, and Cell 2 is the NR PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to TS 38.133 [6] Table A.6.1.1-1 for this test. Cell 2 is configured according to clause C.1.1 and C.1.2.

Table 5.5.1.5.4.1-3: General test parameters for FR2 PSCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
$BW_{channel}$		Config 1, 2	100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1, 2	24
$BW_{occupied}$		Config 1, 2	24
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.4
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
	Config 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
	Config 2		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
	Config 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TRS configuration			TRS.2.1 TDD

Parameter		Unit	Value
			Test 1
			TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD NOTE 3
	Config 2		CSI-RS.3.1 TDD NOTE 3
T1		s	0.2
T2		s	0.35
T3		s	0.35
D1		s	0.31
NOTE 1: UE-specific PDCCH is not transmitted after T1 starts. NOTE 2: E-UTRAN is in non-DRX mode under test. NOTE 3: CSI-RS.3.1 TDD uses 2 antenna ports, which implies the SS shall transmit signal on both polarizations.			

Table 5.5.1.5.4.1-4: Measurement gap configuration for FR2 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
NOTE 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap)	

5.5.1.5.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms).

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters of Cell 2 according to T1 in Table 5.5.1.5.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.1.5.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.1.5.5-1. T3 starts.

5. If the SS:

   a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect any uplink power on NR carrier from time point C (D1 after the start of T3) until T3 expires,

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

6. When T3 expires the SS shall change the SNR value to T1 as specified in Table 5.5.1.5.5-1.
7. If the UE has not re-established the connection in at least 1s, the SS shall ensure PSCell is released.
8. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.
9. If the Reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5].
10. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 5.5.1.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED; Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR2, SMTC.1 and RLM Table H.3.1-4 with a3-offset = -6dB; Table H.3.1-8 with Condition CSI RLM Table H.3.1-9

Table 5.5.1.5.4.3-2: MeasConfig for E-UTRAN PCell

Derivation Path: TS 36.508 [25], Table 4.6.6-1 with condition RF			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig-DEFAULT ::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
measGapConfig	MeasGapConfig-GP1	TS 36.508, table 4.6.6-1A	
}			

5.5.1.5.5 Test requirement

Tables 5.5.1.5.4.1-2 and 5.5.1.5.5-1 define the primary level settings including test tolerances for Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode.

Table 5.5.1.5.5-1: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.9.3					
			AoA1			AoA2		
Assumption for UE beams[Note 10]			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR on RLM-RS1	Config 1, 2	dB	4.1[Note 11]	-3.9[Note 11]	-15			
SNR on RLM-RS2	Config 1, 2	dB	Not sent			4.1[Note 11]	-15	-15
N_{oc}	Config 1, 2	dBm/ 15kHz	-94.8			-94.8		
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 5.5.1.5.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is TS 38.133 [6] A.3.6.
Note 10: Information about types of UE beam is given in TS 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D1 after the start of time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

5.5.1.6 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- TT analysis is made at Test frequency f ≤ 40.8 GHz

- Connection diagram is TBD.

5.5.1.6.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in-sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS in-sync radio link monitoring requirements in TS 38.133 clause 8.1.

5.5.1.6.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and CSI-RS based RLM.

5.5.1.6.3 Minimum conformance requirements

The minimum requirements are specified in clause 4.5.1.0.4. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.1.6.

5.5.1.6.4 Test description

There are two cells configured in this test, the E-UTRA PCell and NR PSCell. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.1.6.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate in-sync states.

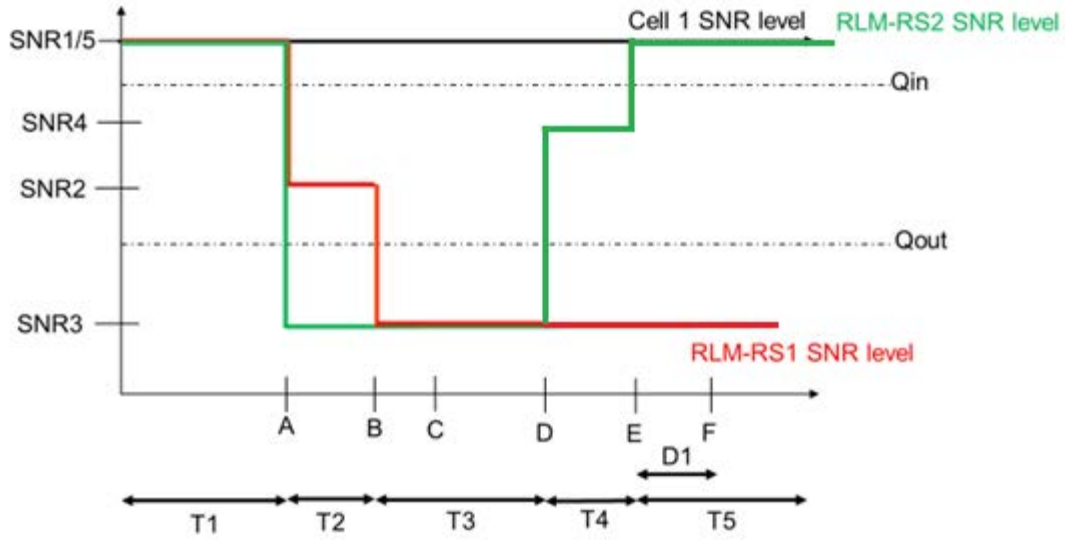

Figure 5.5.1.6.4-1: SNR variation for in-sync testing

5.5.1.6.4.1 Initial conditions

Test 5.5.1.6 can be run in one of the configurations defined in Table 5.5.1.6.4.1-1.

Table 5.5.1.6.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
5.5.1.6-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.1.6-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.1.6.4.1-2

Table 5.5.1.6.4.1-2: Initial conditions for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.

Parameter	Value		Comment
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram	N/A		

1. The test parameters are given in Table 5.5.1.6.4.1-3 below.

2. Message contents are defined in clause 5.5.1.6.4.3.

3. There are two cells in the test, where Cell 1 is the E-UTRAN PCell on the E-UTRA carrier, and Cell 2 is the NR PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to TS 38.133 [6] Table A.6.1.1-1 for this test. Cell 2 is configured according to clause C.1.1 and C.1.2.

Table 5.5.1.6.4.1-3: General test parameters for FR2 PSCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
$BW_{channel}$	Config 1, 2		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1, 2		24
$BW_{occupied}$	Config 1, 2		24
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.4
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
	Config 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
	Config 2		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
	Config 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
OCNG parameters			OP.5
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
CP length			Normal
Out of sync	DCI format		1-0

Parameter		Unit	Value
			Test 1
transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD NOTE 3
	Config 2		CSI-RS.3.1 TDD NOTE 3
T1		s	0.2
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84

NOTE 1: UE-specific PDCCH is not transmitted after T1 starts.
NOTE 2: E-UTRAN is in non-DRX mode under test.
NOTE 3: CSI-RS.3.1 TDD uses 2 antenna ports, which implies the SS shall transmit signal on both polarizations.

5.5.1.6.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters of Cell 2 according to T1 in Table 5.5.1.6.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.1.6.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.1.6.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 5.5.1.6.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 5.5.1.6.5-1. T5 starts.

7. If the SS detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point F (T6 ms after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. If the UE has not re-established the connection in at least 1s, the SS shall ensure PSCell is released.

9. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

10. If the Reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5].

11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 5.5.1.6.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-2 with Condition INTRA-FREQ, L3 FILTERING NEEDED; Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR2, SMTC.1 and RLM Table H.3.1-8 with Condition CSI RLM Table H.3.1-9

5.5.1.6.5 Test requirement

Tables 5.5.1.6.4.1-2 and 5.5.1.6.5-1 define the primary level settings including test tolerances for Radio Link Monitoring in-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode.

Table 5.5.1.6.5-1: Cell specific test parameters for FR2 for CSI-RS is-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1									
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup		Setup 3 defined in A.9.3									
		AoA1					AoA2				
Assumption for UE beams[Note 10]		Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS	dB										

EPRE ratio of PBCH DMRS to SSS		dB	0										
EPRE ratio of PBCH to PBCH DMRS		dB											
EPRE ratio of PSS to SSS		dB											
EPRE ratio of PDSCH DMRS to SSS		dB											
EPRE ratio of PDSCH to PDSCH DMRS		dB											
EPRE ratio of OCNG DMRS to SSS		dB											
EPRE ratio of OCNG to OCNG DMRS		dB											
SNR on RLM-RS1	Config 1, 2	dB	4.1 Note 11	-3.9 Note 11	-15	-15	-15						
SNR on RLM-RS2	Config 1, 2		Not sent					4.1 Note 11	-15	-15	-4.5	4.1 Note 11	
N_{oc}	Config 1, 2	dBm/ 15KHz	-94.8					-94.8					
Propagation condition			TDL-A 30ns 75Hz					TDL-A 30ns 75Hz					

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 5.5.1.6.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is TS 38.133 [6] A.3.6.
Note 10: Information about types of UE beam is given in TS 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 after the start of time duration T5) the UE shall transmit uplink signal at least in all slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

5.5.1.7 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode

Editor's note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

5.5.1.7.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS Out-of-sync radio link monitoring requirements in TS 38.133 clause 8.1.

5.5.1.7.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC, CSI-RS based RLM and long DRX cycle.

5.5.1.7.3 Minimum conformance requirements

The minimum requirements are specified in clause 5.5.1.0.3. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.1.7.

5.5.1.7.4 Test description

There are two cells configured in this test, the E-UTRA PCell and NR PSCell. This test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 5.5.1.7.4-1 shows the three different time durations and the corresponding variation of the downlink SNR in the active cell to emulate out-of-sync states.

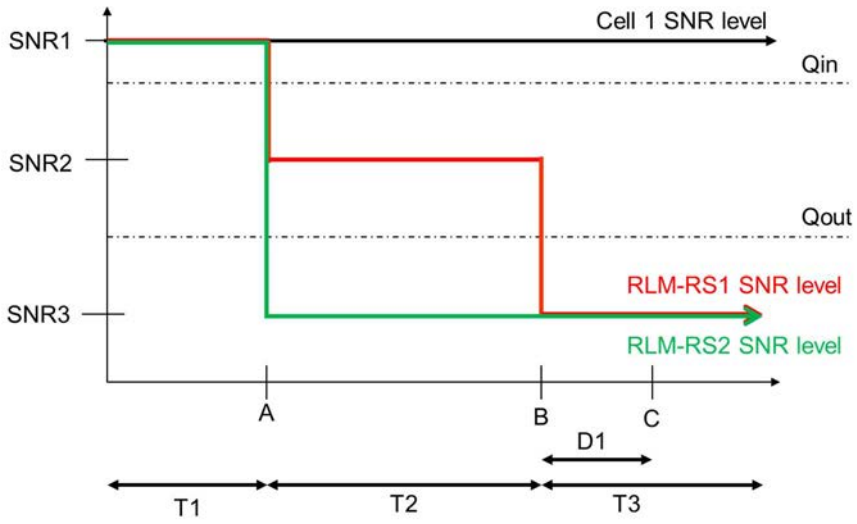

Figure 5.5.1.7.4-1: SNR variation for out-of-sync testing

5.5.1.7.4.1 Initial conditions

Test 5.5.1.7 can be run in one of the configurations defined in Table 5.5.1.7.4.1-1.

Table 5.5.1.7.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
5.5.1.7-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.1.7-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.1.7.4.1-2

Table 5.5.1.7.4.1-2: Initial conditions for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.1.7.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters are given in Table 5.5.1.7.4.1-3 below.

2. Message contents are defined in clause 5.5.1.7.4.3.

3. There are two cells in the test, where Cell 1 is the E-UTRAN PCell on the E-UTRA carrier, and Cell 2 is the NR PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clause C.1.1 and C.1.2.

Table 5.5.1.7.4.1-3: General test parameters for FR2 PSCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR. 3.1 TDD
	Config 2		CR. 3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR. 3.4 TDD CCR.3.6 TDD
	Config 2		CCR. 3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
	Config 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
SSB index for BFD-RS	Config 1, 2		0, 1
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

Parameter		Unit	Value
			Test 1
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
	Config 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
NOTE 1: UE-specific PDCCH is not transmitted after T1 starts. NOTE 2: E-UTRAN is in non-DRX mode under test.			

5.5.1.7.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters of Cell 2 according to T1 in Table 5.5.1.7.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.1.7.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.1.7.5-1. T3 starts.

5. If the SS:

   a) detects uplink power on NR carrier in the On-duration part of every DRX cycle in the slots configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect any uplink power on NR carrier from time point C (D1 after the start of T3) until T3 expires,

   the number of successful tests is increased by one.

Otherwise the number of failed tests is increased by one.

6. When T3 expires the SS shall change the SNR value to T1 as specified in Table 5.5.1.7.5-1.

7. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with condition “Short_DCI” and with the following exceptions:

Table 5.5.1.7.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-9 Table H.3.7-1 with condition DRX.3

Table 5.5.1.7.4.3-2: CSI-ReportConfig

Derivation Path: Table H.3.5-4			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig ::= CHOICE {			
slots40	4		
}			
pucch-CSI-ResourceList SEQUENCE (SIZE (1..maxNrofBWPs)) OF{			
PUCCH_CSI_Resource[0] SEQUENCE {			
uplinkBandwidthPartId	BWP-Id		
pucch_Resource	9		
}			
}			
}			
}			
}			

Table 5.5.1.7.4.3-3: *RadioLinkMonitoringConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF {	4 entries		
RadioLinkMonitoringRS[1] SEQUENCE {			
radioLinkMonitoringRS-Id	0		
purpose	beamFailure		
detectionResource CHOICE {			
ssb-Index	0	Index of SSB #0	
}			
}			
RadioLinkMonitoringRS[2] SEQUENCE {			
radioLinkMonitoringRS-Id	1		

purpose	beamFailure		
detectionResource CHOICE {			
ssb-Index	1	Index of SSB #1	
}			
}			
RadioLinkMonitoringRS[3] SEQUENCE {			
radioLinkMonitoringRS-Id	2		
purpose	rlf		
detectionResource CHOICE {			
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4)	TS 38.508-1[14], table 7.3.1-7C	
}			
}			
RadioLinkMonitoringRS[4] SEQUENCE {			
radioLinkMonitoringRS-Id	3		
purpose	rlf		
detectionResource CHOICE {			
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4) with condition SECOND_SET	TS 38.508-1[14], table 7.3.1-7C	
}			
}			
}			
}			

5.5.1.7.5 Test requirement

Tables 5.5.1.7.4.1-2 and 5.5.1.7.5-1 define the primary level settings including test tolerances for Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode.

Table 5.5.1.7.5-1: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup			Setup 1 defined in A.9.1		
Assumption for UE beams[Note 10]			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS1	Config 1, 2	dB	3.3[Note]	-4.7[Note]	-15.4
SNR on RLM-RS2	Config 1, 2		3.3[Note]	-15.4	-15.4
N_{oc}	Config 1	dBm/15KHz	-104.7		
	Config 2		-104.7		
Propagation condition			TDL-A 30ns 75Hz		

Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 5.5.1.7.4-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is TS 38.133 [6] A.3.6.
Note 10:	Information about types of UE beam is given in TS 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least once every DRX cycle, in the On-duration part of the cycle in the slots configured for CSI transmission according the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D1 after the start of time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

5.5.1.8 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode

Editor's note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

5.5.1.8.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 PSCell CSI-RS in-sync radio link monitoring requirements in TS 38.133 clause 8.1.

5.5.1.8.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC, CSI-RS based RLM and long DRX cycle.

5.5.1.8.3 Minimum conformance requirements

The minimum requirements are specified in clause 5.5.1.0.4. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.1.8.

5.5.1.8.4 Test description

There are two cells configured in this test, the E-UTRA PCell and NR PSCell. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.1.8.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate in-sync states.

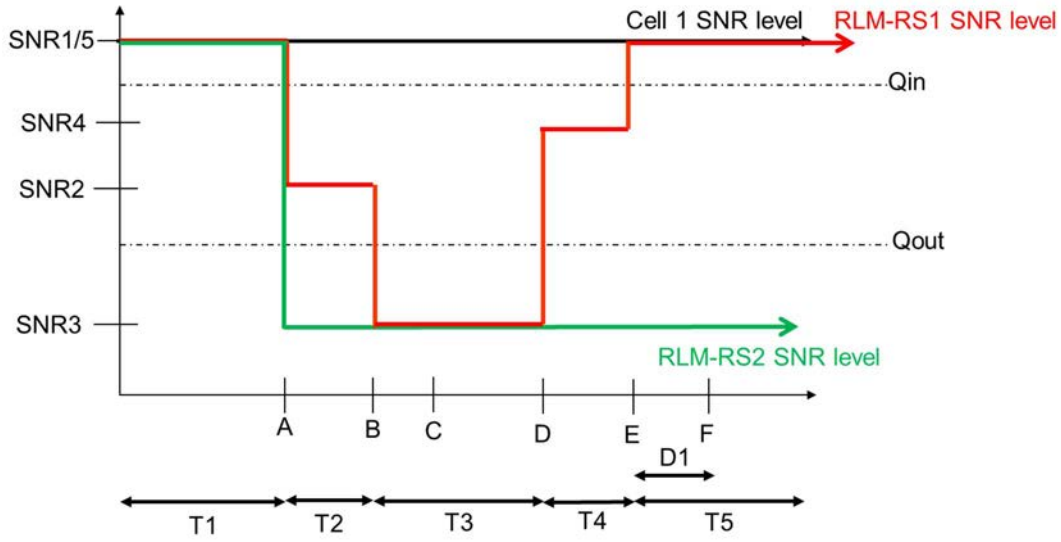

Figure 5.5.1.8.4-1: SNR variation for In-sync testing

5.5.1.8.4.1 Initial conditions

Test 5.5.1.8 can be run in one of the configurations defined in Table 5.5.1.8.4.1-1.

Table 5.5.1.8.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
5.5.1.8-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.1.8-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.1.8.4.1-2

Table 5.5.1.8.4.1-2: Initial conditions for CSI-RS In-sync radio link monitoring in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters are given in Table 5.5.1.8.4.1-2 below.

2. Message contents are defined in clause 5.5.1.8.4.3.

3. There are two cells in the test, where Cell 1 is the E-UTRAN PCell on the E-UTRA carrier, and Cell 2 is the NR PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clause C.1.1 and C.1.2.

Table 5.5.1.8.4.1-3: General test parameters for FR2 PSCell for CSI-RS In-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
	Config 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
	Config 2		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
	Config 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
SSB index for BFD-RS	Config 1, 2		0, 1
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission	DCI format		1-0

Parameter		Unit	Value
			Test 1
parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
	Config 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	1.64
T4		s	0.2
T5		s	1.88
D1		s	1.84
NOTE 1: UE-specific PDCCH is not transmitted after T1 starts. NOTE 2: E-UTRAN is in non-DRX mode under test.			

Table 5.5.1.8.4.1-4: Measurement gap configuration for FR2 CSI-RS In-sync radio link monitoring in DRX mode

Field	Test 1
	Value
gapOffset	0
NOTE 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap)	

5.5.1.8.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms).

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. The SS shall transmit an *RRCConnectionReconfiguration* message configuring the UE for inter-frequency measurements.

3. The UE shall transmit *RRCReconfigurationComplete* message.

4. Set the parameters of Cell 2 according to T1 in Table 5.5.1.8.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.1.8.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.1.8.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 5.5.1.8.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 5.5.1.8.5-1. T5 starts.

9. If the SS detects uplink power on NR carrier in the On-duration part of every DRX cycle in the configured slots for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point F (D1 after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

10. If the UE has not re-established the connection in at least 1s, the SS shall ensure PSCell is released.

11. The SS then shall transmit *RRCConnectionReconfiguration* message with condition *MCG_and_SCG* according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

12. If the Reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG and SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5].

13. Repeat steps 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.1.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with condition “Short_DCI” and with the following exceptions:

Table 5.5.1.8.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED; Table H.3.1-3 with Condition INTER-FREQ MO, (where ssbFrequency is set to the ARFCN value of carrier center of High range),and RLM Table H.3.1-4 with a3-offset = 0dB; Table H.3.7-1 with condition DRX.3 and Gap

Table 5.5.1.8.4.3-2: MeasConfig for E-UTRAN PCell

Derivation Path: TS 36.508, Table 4.6.6-1 with condition RF			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig-DEFAULT ::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
measGapConfig	MeasGapConfig-GP1	TS 36.508, table 4.6.6-1A	

}			

Table 5.5.1.8.4.3-3: RLF-TimersAndConstant

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms2000		
}			

Table 5.5.1.8.4.3-4: CSI-ReportConfig

Derivation Path: Table H.3.5-4			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig ::= CHOICE {			
slots40	4		
}			
pucch-CSI-ResourceList SEQUENCE (SIZE (1..maxNrofBWPs)) OF{			
PUCCH_CSI_Resource[0] SEQUENCE {			
uplinkBandwidthPartId	BWP-Id		
pucch_Resource	9		
}			
}			
}			
}			
}			

Table 5.5.1.8.4.3-5: *RadioLinkMonitoringConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF {	4 entries		
RadioLinkMonitoringRS[1] SEQUENCE {			
radioLinkMonitoringRS-Id	0		
purpose	beamFailure		
detectionResource CHOICE {			
ssb-Index	0	Index of SSB #0	
}			
}			
RadioLinkMonitoringRS[2] SEQUENCE {			
radioLinkMonitoringRS-Id	1		
purpose	beamFailure		
detectionResource CHOICE {			
ssb-Index	1	Index of SSB #1	
}			
}			
RadioLinkMonitoringRS[3] SEQUENCE {			
radioLinkMonitoringRS-Id	2		
purpose	rlf		
detectionResource CHOICE {			
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4)	TS 38.508-1[14], table 7.3.1-7C	
}			
}			
RadioLinkMonitoringRS[4] SEQUENCE {			

radioLinkMonitoringRS-Id	3		
purpose	rlf		
detectionResource CHOICE {			
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4) with condition SECOND_SET	TS 38.508-1[14], table 7.3.1-7C	
}			
}			
}			
}			

5.5.1.8.5 Test requirement

Tables 5.5.1.8.4.1-2 and 5.5.1.8.5-1 define the primary level settings including test tolerances for Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode.

Table 5.5.1.8.5-1: Cell specific test parameters for FR2 for CSI-RS In-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.9.1				
Assumption for UE beams[Note 10]			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS1	Config 1, 2	dB	3.3[Note]	-4.7[Note 11]	-15.4	-4. 9	3.3[Note 11]
SNR on RLM-RS2	Config 1, 2	dB	3.3[Note]	-15.4	-15.4	-15.4	-15.4
N_{oc}	Config 1, 2	dBm/15KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 5.5.1.8.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is TS 38.133 [6] A.3.6.
Note 10: Information about types of UE beam is given in TS 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 after the start of time duration T5) the UE shall transmit uplink signal at least once every DRX cycle, in the ON-duration part of the cycle in the slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

5.5.1.9 EN-DC FR2 radio link monitoring UE scheduling restrictions

Editor's note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

The test is incomplete for UE power classes other than PC3

The test is incomplete for test frequencies > 40.8 GHz

5.5.1.9.1 Test purpose

The purpose of this test is to verify that the NR UE correctly follows the RLM scheduling restrictions requirements defined in TS 38.133 [6] clause 8.1.7, and to verify that the UE correctly receive the PDCCH scheduled on the symbols right before the RLM SSB symbols without overlap so that it sends ACK/NACK correctly.

5.5.1.9.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

This test is only applicable to UE which supports *pdcch-MonitoringAnyOccasions* or *pdcch-MonitoringAnyOccasionsWithSpanGap*.

5.5.1.9.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 5.5.1.0.5.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.1.9.

5.5.1.9.4 Test description

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and NR FR2 PSCell (Cell 2). The test parameters for NR PSCell are given in table 5.5.1.9.4.1-1, table 5.5.1.9.4.1-3 and table 5.5.1.9.5-1 below and the parameters and applicability for the E-UTRAN cell are defined in A.6.1.2. The test consists of one time period with time duration of T1. Figure 5.5.1.9.4-1 shows the Time multiplexed downlink transmissions from each Angle of Arrival. The UE is required during time period T1 to transmit ACK/NACK correctly upon scheduling of PDSCH.

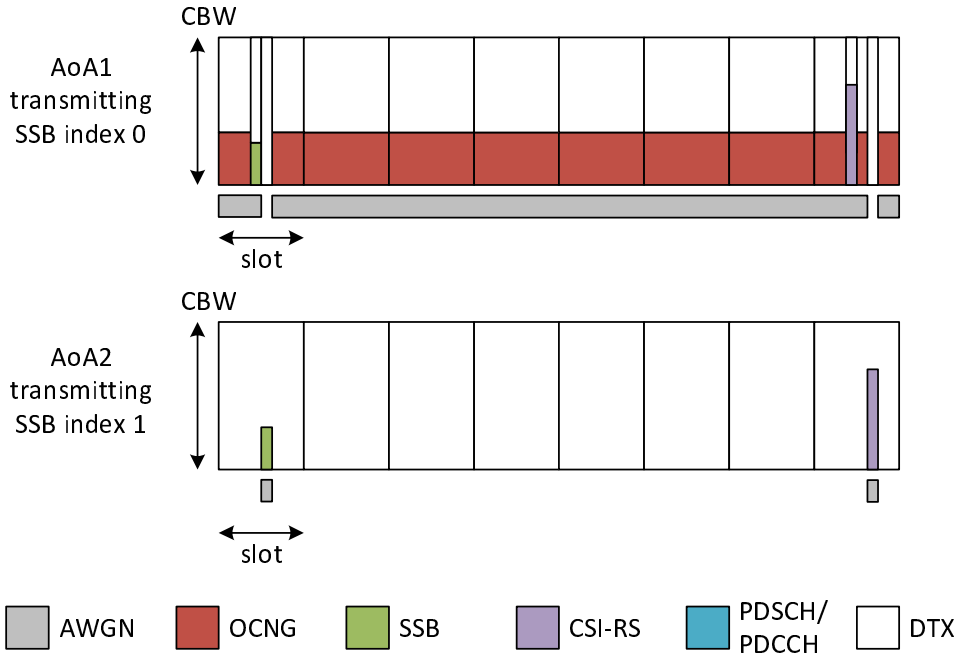

Figure 5.5.1.9.4-1: Time multiplexed downlink transmissions

5.5.1.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.1.9.4.1-1.

Table 5.5.1.9.4.1-1: Supported test configurations for EN-DC FR2 radio link monitoring UE scheduling restrictions

Configuration	Description
5.5.1.9-1	FDD LTE, 120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode
5.5.1.9-2	TDD LTE, 120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 5.5.1.9.4.1-2

Table 5.5.1.9.4.1-2: Initial conditions for EN-DC FR2 radio link monitoring UE scheduling restrictions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.1.9.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PSCell are given in Table 5.5.1.9.4.1-3
2. Message contents are defined in clause 5.5.1.9.4.3.

3. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2

Table 5.5.1.9.4.1-3: General test parameters for EN-DC FR2 radio link monitoring UE scheduling restrictions

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		1, 2	1 and 2	1 for NR PSCell and 2 for LTE PCell
SSB configuration		1, 2	SSB.1 FR2	
SMTC configuration		1, 2	SMTC.3	
DRX cycle length	s	1, 2	OFF	
T1	s	1, 2	5	During T1 the UE is required to correctly transmit ACK/NACK

5.5.1.9.4.2 Test Procedure

1. Set the parameters according to T1 in Table 5.5.1.9.4.4-1. Propagation conditions are set according to clause C.2.2. T1 starts.

2. The SS continuously schedules DL reception on the symbol #2-3 right before each SSB which is not covered by SMTC.

3. If the SS observes no ACK/NACK DTX on each UL transmission occasion scheduled during step 2 via PDCCH which are not overlapped with SSBs configured for radio link monitoring during T1, the number of successful tests is increased by one. otherwise the number of failed tests is increased by one.

4. The UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG and SCG*, Connected without release *On* according to TS 38.508-1 [10] clause 4.5.

5. Repeat steps 1-3 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.1.9.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.1.9.4.3-1: Common Exception messages for EN-DC FR2 radio link monitoring UE scheduling restrictions

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1a Table H.3.1-2 Table H.3.1-3 with condition INTRA-FREQ MO, Synchronous cells and set smtc1 as SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.3 Table H.3.1-8 with condition SSB RLM

Table 5.5.1.9.4.3-2: *SearchSpace*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162 with condition USS			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
monitoringSymbolsWithinSlot	00100000000000	Ensure that the UE monitors PDCCH on symbols right	

		before SSB#0 (symbol #2 and #3)	
}			

5.5.1.9.5 Test Requirement

Table 5.5.1.9.4.1-3 and 5.5.1.9.5-1 define the primary level settings including test tolerances for EN-DC FR2 radio link monitoring UE scheduling restrictions.

Table 5.5.1.9.5-1: Cell specific test parameters for EN-DC FR2 radio link monitoring UE scheduling restrictions

Parameter	Unit	Test configuration	Cell 2	
AoA setup		1, 2	Setup 3 defined in A.9.3	
			AoA1	**AoA2**
Assumption for UE beams Note 1			Rough	Rough
TDD configuration		1, 2	TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	24	
PDSCH Reference measurement channel		1, 2	SR.3.2 TDD	Not sent
RMSI CORESET RMC configuration		1, 2	CR.3.1 TDD	Not sent
Dedicated CORESET RMC configuration		1, 2	CCR.3.2 TDD	Not sent
TRS configuration		1, 2	TRS.2.1 TDD	TRS.2.2 TDD
PDCCH/PDSCH TCI state		1, 2	TCI.State.2	Not sent
OCNG Pattern		1, 2	OP.5	Not sent
Initial DL BWP configuration		1, 2	DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1	
RLM-RS		1, 2	SSB with index 0	SSB with index 1
N_{oc}	dBm/15kHz	1, 2	-94.8	-94.8
N_{oc} Note2	dBm/SCS	1, 2	-85.8	-85.8
$\hat{E}_s / N_{oc}$	dB	1, 2	4.1	4.1
$\hat{E}_s / I_{ot}$ BB Note 4	dB	1, 2	2.37	2.37
SSB_RP Note3	dBm/SCS	1, 2	-81.7	-81.7
Io	dBm/95.04 MHz	1, 2	-55.65	-55.65
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure 5.5.1.9.4-1	
Propagation Condition		1, 2	AWGN	AWGN

Note 1:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.

The UE behaviour during time duration T1 follows the requirements defined in TS 38.133 [6] clause 8.1.7.3:

The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.

The UE shall be continuously scheduled by PDCCH on the symbols right before each SSB which is not covered by SMTC during the entire length of T1. The UE shall transmit ACK/NACK for every scheduled PDCCH during the time duration T1.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.5.1.10 EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

5.5.1.10.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 5.5.1.0.6.1 for UE fulfilling good serving cell quality criterion.

5.5.1.10.2 Test applicability

This test applies to all types of E-UTRA UE release 17 and forward, supporting EN-DC FR2 and RLM relaxation criteria *rlm-Relaxation-r17*.

5.5.1.10.3 Minimum conformance requirement

The requirements for UE supporting relaxed measurement criterion are specified in clause 5.5.1.0.6. The minimum requirements for SSB-based RLM with this criterion are specified in clause 5.5.1.0.6.1. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.1.10.

5.5.1.10.4 Test description

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 5.5.1.10.4.1-1. The test parameters are given in Tables 5.5.1.10.4.1-3 and 5.5.1.10.5-1.

There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.6.1.1-1. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 5.5.1.10.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states.

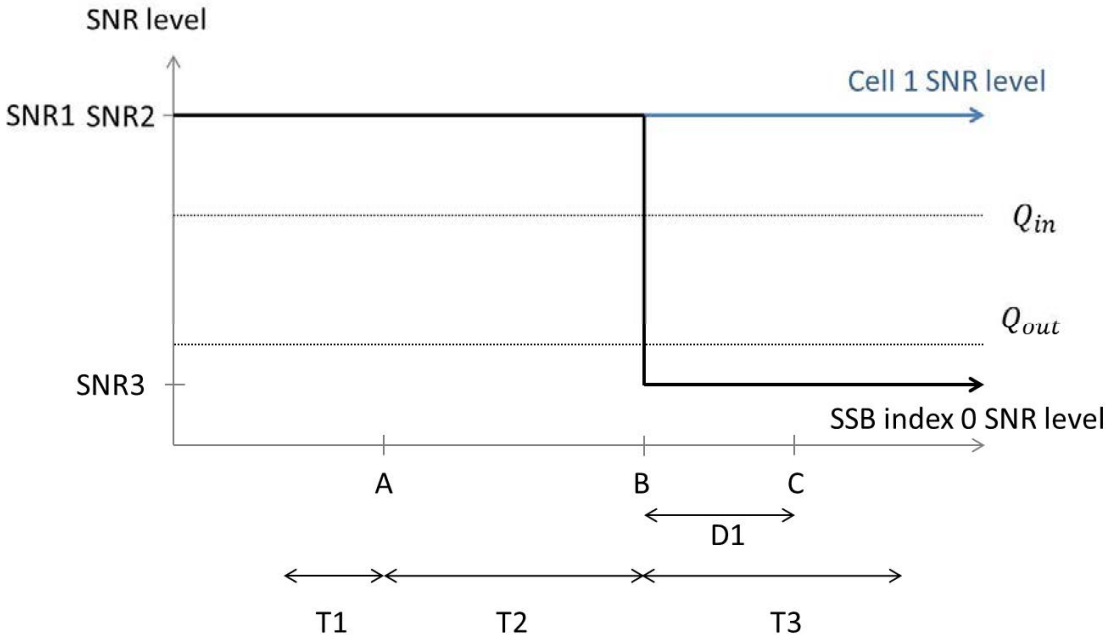

Figure 5.5.1.10.4-1: SNR variation for EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

5.5.1.10.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.1.10.4.1-1.

Table 5.5.1.10.4.1-1: Supported test configurations for EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Test Case ID	Description
5.5.1.10-1	FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.1.10-2	TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.1.10.4.1-2.

Table 5.5.1.10.4.1-2: Initial conditions for EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 and 7.2.3.	
Channel bandwidth	As specified by the test configuration selected from Table 5.5.1.10.4.1-1.	
Propagation conditions	AWGN	As specified in clause C.2.2.

Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.1.10.4.1-3.
2. Message contents are defined in clause 5.5.1.10.4.3.
3. There are two cells (one E-UTRAN carrier and one NR carrier) specified in the test. Cell 1 is the PCell on the E-UTRAN carrier and Cell 2 is the PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 shall be configured according to clause C.1.1 and C.1.2.

Table 5.5.1.10.4.1-3: General test parameters for EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Parameter			Unit	Value
				Test 1
Active E-UTRA PCell				Cell 1
E-UTRA RF Channel Number				1
Active PSCell				Cell 2
RF Channel Number				2
Duplex mode		Config 1, 2		TDD
$BW_{channel}$		Config 1, 2		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1, 2		66
DL initial BWP configuration		Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2		DLBWP.1.1
UL initial BWP configuration		Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2		ULBWP.1.1
TDD Configuration		Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1, 2		CCR.3.4 TDD
SSB Configuration		Config 1, 2		SSB.1 FR2
SMTC Configuration		Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2		120 KHz
PRACH Configuration		Config 1, 2		Table A.7.2
SSB index assigned as RLM RS		Config 1, 2		0
OCNG parameters				OP.1
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1

N311			1
CSI-RS for CSI reporting	Config 1, 2		CSI-RS.3.1 TDD
reportConfigType			Periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1, 2		TRS.2.1 TDD
T1		s	0.2
T2		s	14.48
T3		s	28.88
D1		s	28.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.			

5.5.1.10.4.2 Test Procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) configuring the UE with *goodServingCellEvaluationRLM* and measurements as specified in section 5.5.1.10.4.3.

3. The UE shall transmit *RRCReconfigurationComplete* message (embedded in *RRCConnectionReconfiguration* message).

4. Set the parameters according to T1 in Table 5.5.1.10.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.1.10.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.1.10.5-1. T3 starts.

7. If the SS:

   a) detects uplink power in the On-Duration part of every DRX cycle in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point B; and

   b) does not detect any uplink power in any of such CSI transmission occasions from time point C (D1 after the start of T3) until T3 expires,

   the number of successful tests is increased by one. Otherwise, the number of failed tests is increased by one.

8. When T3 expires the SS shall change the SNR value to T1 as specified in Table 5.5.1.10.5-1.

9. If the UE has not re-established the connection in at least 1s, go to step 10. Otherwise go to step 11.

10. The SS shall ensure the PSCell is released. Then it shall transmit an *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If the reconfiguration fails go to step 11, otherwise go to step 12.

11. Switch off and on the UE and go to step 12.
12. Repeat steps 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.1.10.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and 7.3.1 with the following exceptions.

Table 5.5.1.10.4.3-1: Common Exception messages for EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition L3 FILTERING NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-4 with A3-offset = 0 Table H.3.4-1 Table H.3.4-1a Table H.3.4-3 Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table H.3.7-1 with Condition DRX.3

Table 5.5.1.10.4.3-2: *RLF-TimersAndConstant* for EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

Table 5.5.1.10.4.3-3: *CellGroupConfig* for EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
goodServingCellEvaluationRLM-r17 SEQUENCE {			
offset-r17	Not present	If this field is absent, the UE applies the (default) value of 0 dB	
}			
}			
}			

5.5.1.10.5 Test Requirement

Table 5.5.1.10.5-1 defines the cell specific primary level settings including test tolerances for EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion.

Table 5.5.1.10.5-1: Cell specific test parameters for EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup			Setup 1 defined in A.9		
Assumption for UE beams Note 5			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
ssb-Index 0 SNR	Config 1, 2	dB	3.25 Note 6	3.25 Note 6	-15.50
N_{oc}	Config 1, 2	dBm/15K Hz	-104.7dBm		
goodServingCellEvaluationRLM			configured		
offset in goodServingCellEvaluationRLM		dB	Not configured		
Propagation condition			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is D.4.
Note 5: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95 %.

5.5.1.11 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Editor's Note: This test case is incomplete in following aspects:

- MU and TT are missing
- Message contents may need to be updated
- Test procedure needs to be updated
- Applicability needs to be updated
- Annex E and F need to be updated
- Configuration of 3AoA setup and testability of the device is still FFS
- UE positioning procedure is still FFS

5.5.1.11.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR2 radio link monitoring requirements defined in clause 5.5.1.

5.5.1.11.2 Test applicability

This test applies to all types of E-UTRA UE release 18 and forward, supporting EN-DC and [fast beam sweeping in multi-Rx].

5.5.1.11.3 Minimum conformance requirement

The minimum requirements are specified in clause 5.5.1.0.1. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.1.11.

5.5.1.11.4 Test description

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 5.5.1.11.4.1-1. The test parameters are given in Table 5.5.1.11.5-1.

There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.6.1.2-1. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 5.5.1.11.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure 5.5.1.11.4-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2 and configured with *groupBasedBeamReporting-r17*. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

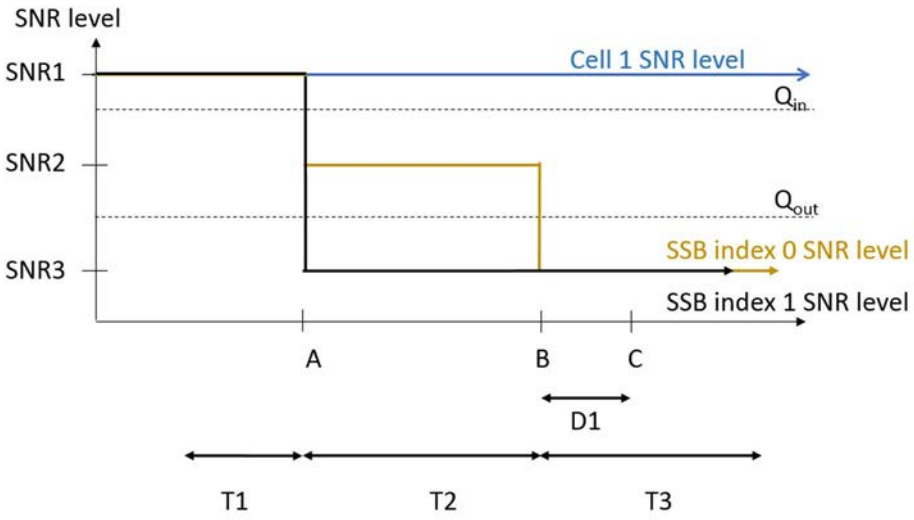

Figure 5.5.1.11.4-1: SNR variation for out-of-sync testing

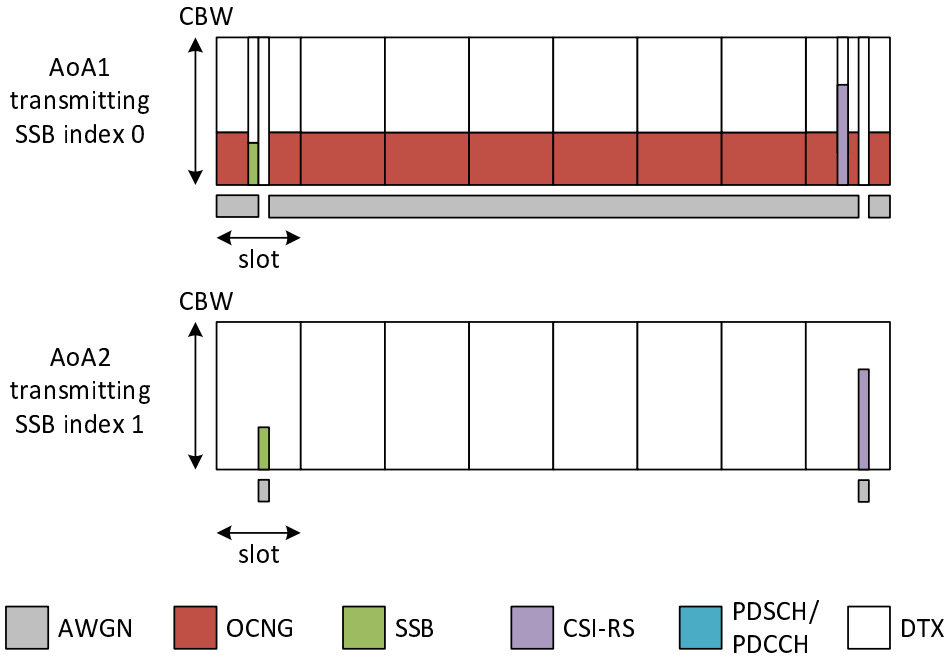

Figure 5.5.1.11.4-2: Time multiplexed downlink transmissions

5.5.1.11.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2 [18].

This test shall be tested using any of the test configurations in Table 5.5.1.11.4.1-1.

Table 5.5.1.11.4.1-1: Supported Test Configurations for EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Configuration	Description
5.5.1.11-1	FDD LTE PCell, NR 120 KHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.1.11-2	TDD LTE PCell, NR 120 KHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.1.11.4.1-2

Table 5.5.1.11.4.1-2: Initial conditions for EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.1.11.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	

Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 5.5.1.11.4.3.

2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.2-1. Cell 2 is NR FR2 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2

3. The test parameters are given in Table 5.5.1.11.5-1 below.

4. Downlink signals for NR cell are initially set up according to Annex C.1.1 and C.1.2 for this test.

Table 5.5.1.11.4.1-3: General test parameters for EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Parameter			Unit	Value
				Test 1
Active E-UTRA PCell				Cell 1
E-UTRA RF Channel Number				1
Active PSCell				Cell 2
RF Channel Number				2
Duplex mode		Config 1, 2		TDD
$BW_{channel}$		Config 1, 2		100: $N_{PRB,c}$ = 66
Data PRBs allocated		Config 1, 2		24
DL initial BWP configuration		Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2		DLBWP.1.1
UL initial BWP configuration		Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2		ULBWP.1.1
TDD Configuration		Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1, 2		CCR.3.4 TDD
SSB Configuration		Config 1, 2		SSB.1 FR2
SMTC Configuration		Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2		120 KHz
PRACH Configuration		Config 1, 2		PRACH.1 FR2
SSB index assigned as RLM RS		Config 1, 2		0,1
OCNG parameters				OP.5
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				*NA*
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1, 2		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1, 2		TRS.2.1 TDD

Parameter	Unit	Value
		Test 1
T1	s	0.2
T2	s	1.2*N +0.08 Note 4
T3	s	1.2*N +0.08 Note 4
D1	s	1.2*N +0.04 Note 4
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 3: E-UTRAN is in non-DRX mode under test. NOTE 4: N is the value indicated by UE for *fastBeamSweepingMultiRx-r18*.		

5.5.1.11.4.2 Test Procedure

Before the start of T1, the UE shall be fully synchronized with Cell 1 and Cell 2. The UE shall be configured for periodic CQI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 5.5.1.11.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity EN-DC*, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [6] clause 5.5.

2. The SS shall transmit an *RRCConnectionReconfiguration* message containing an *RRCReconfiguration* message configuring the UE with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, *purpose* set to '*rlf*', and *groupBasedBeamReporting-r17*, as specified in section 5.5.1.11.4.3.

3. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

4. Set the parameters according to T1 in Table 5.5.1.11.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.1.11.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.1.11.5-1. T3 starts.

7. If the SS:
   a) detects uplink power in each subframe configured for CQI transmission (according to configured CQI periodicity on PUCCH format 2) during the period from time point A to time point B

   and

   b) does not detect any uplink power from time point C (D1 seconds after the start of T3) until T3 expires,

   the number of successful tests is increased by one.

8. Otherwise, the number of failed tests is increased by one and proceed with Step 10.

9. When T3 expires the SS shall change the SNR value to T1 as specified in Table 5.5.1.11.5-1.

10. If the UE has not re-established the connection in at least 1s, the SS shall ensure PSCell is released, the UE shall switched off and then on.

11. Repeat steps 1-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.1.11.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.1.11.4.3-1: Common Exception messages for EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-7 Table H.3.1-8 with Condition SSB RLM Table H.3.4-1 Table H.3.5-4 Table H.3.5-9 with Condition FR2 SSB RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.5.1.11.4.3-2: RLF-TimersAndConstants for EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
UE-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

5.5.1.11.4 Test Requirement

Table 5.5.1.11.5-1 defines the cell specific primary level settings for EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx.

Table 5.5.1.11.5-1: OTA related cell specific test parameters for EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Parameter		**Unit**	**Test 1**					
			T1	**T2**	**T3**	**T1**	**T2**	**T3**
AoA setup			Setup 5 defined in A.9					
			AoA1			AoA2		
Assumption for UE beams[Note 5]			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1, 2	dB	2+TT Note 6	-6+TT Note 6	-15+TT			
ssb-Index 1 SNR	Config 1, 2	dB	Not sent			2+TT Note 6	-15+TT	-15+TT
N_{oc}	Config 1, 2	dBm/ 15 kHz	-92.1+TT			-92.1+TT		
Time multiplexing of the downlink transmissions from each AoA			Defined in figure 5.5.1.11.4-2					
Propagation condition			TDL-A 30ns 75 Hz			TDL-A 30ns 75 Hz		

NOTE 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is defined in clause D.4.1.1.
NOTE 5: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
NOTE 6: This value allows up to 1 dB degradation from applied SNR to UE baseband

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90 %.

5.5.2 Interruption

5.5.2.0 Minimum conformance requirements

5.5.2.0.1 Minimum conformance requirements for interruptions at transitions between active and non-active during DRX

[TS38.133, clause 8.2.1.2.1]

Interruption on PSCell and the activated SCell if configured due to E-UTRA PCell transitions between active and non-active during DRX when PSCell or SCell is in non-DRX are allowed with up to 1% probability of missed ACK/NACK when the configured E-UTRA PCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured E-UTRA PCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 5.5.2.0.1-1.

Each interruption shall not exceed X slot as defined in table 5.5.2.0.1-1.

Table 5.5.2.0.1-1: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	
3	0.125	5	

When both E-UTRA PCell and PSCell are in DRX, no interruption is allowed.

The normative reference for this requirement is TS 38.133 [6] clause 8.2.1.2.1.

5.5.2.0.2 Minimum conformance requirements for interruptions during measurements on deactivated NR SCC

[TS38.133, clause 8.2.1.2.5.1]

Interruption on PSCell and other active NR SCell(s) during measurement on the deactivated NR SCC shall meet requirements in clause 8.2.2.2.3, where the term PCell in clause 8.2.2.2.3 shall be deemed to be replaced with PSCell.

[TS38.133, clause 8.2.2.2.3]

Interruptions on PCell due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 5.5.2.0.2-1 if the PCell is not in the same band as the deactivated SCell. Each interruption shall not exceed requirement in Table 5.5.2.0.2-2 if the PCell is in the same band as the deactivated SCell.

Interruptions on active SCell due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in

Table 5.5.2.0.2-1 if the active SCell is not in the same band as the deactivated SCell. Each interruption shall not exceed requirement in Table 5.5.2.0.2-2 if the active SCell is in the same band as the deactivated SCell.

[TS38.133, clause 8.2.2.2.2]

Table 5.5.2.0.2-1: Interruption duration for SCell activation/deactivation for inter-band CA

μ	NR Slot length (ms)	Interruption length
0	1	1
1	0.5	1
2	0.25	2
3	0.125	4

Table 5.5.2.0.2-2: Interruption duration for SCell activation/deactivation for intra-band CA

μ	NR Slot length (ms)	Interruption length
0	1	1 + $T_{SMTC_duration}$
1	0.5	1 + $T_{SMTC_duration}$
2	0.25	2 + $T_{SMTC_duration}$
3	0.125	4 + $T_{SMTC_duration}$
NOTE: $T_{SMTC_duration}$ is - the longest SMTC duration among all above activated serving cells and the SCell being activated when one SCell is activated; - the longest SMTC duration among all activated serving cells in the same band when one SCell is deactivated.		

The normative reference for this requirement is TS 38.133 [6] clause 8.2.1.2.5.1.

5.5.2.0.3 Minimum conformance requirements for interruptions during measurements on deactivated E-UTRAN SCC

[TS38.133 clause 8.2.1.2.5.2]

When one E-UTRA SCell in MCG is deactivated, the UE is allowed due to measurements on the E-UTRA SCC with the deactivated E-UTRA SCell:

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK when any of the configured *measCycleSCell* [2] for the deactivated E-UTRA SCells is 640 ms or longer.
- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK regardless of the configured *measCycleSCell* [2] for the deactivated E-UTRA SCells if indicated by the network using IE *allowInterruptions* [2].

Each interruption shall not exceed

- X3 slot, if the PSCell or activated SCell is not in the same band as the E-UTRA deactivated SCC being measured, or
- Y3 slot + SMTC duration, if the PSCell or activated SCell is in the same band as the E-UTRA deactivated SCC being measured, provided the cell specific reference signals from the PSCell or activated SCell and the E-UTRA deactivated SCC being measured are available in the same slot.

Table 5.5.2.0.3-1: Interruption length X3 and Y3 at measurements on deactivated E-UTRA SCC

μ	NR Slot length (ms)	Interruption length X3 slot	Interruption length Y3 slot
0	1	1	1
1	0.5	1	1

2	0.25	2	2
3	0.125	4	4

The normative reference for this requirement is TS 38.133 [6] clause 8.2.1.2.5.1.

5.5.2.0.4 Minimum conformance requirements for interruptions at NR SRS carrier based switching

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to an active UL BWP of another activated carrier;
- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;
- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex and srs-SwitchFromCarrier in TS38.331 [2];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [26].
- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD in SCG.
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [2], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101 [5], the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 5.5.2.0.4-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 5.5.2.0.4-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 5.5.2.0.4-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 5.5.2.0.4-2.

Table 5.5.2.0.4-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us)[Note 1]	Interruption length X1 (slots)
			Sub carrier spacing for agressor cell (kHz)

			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	3	3
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

Table 5.5.2.0.4-2: Interruption length X2 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) Note1	Interruption length X2 (slots)	
			Sub carrier spacing for agressor cell (kHz)	
			60	120
0	1	$\leq$ 200	2	2
1	0.5	$\leq$ 200	2	2
2	0.25	$\leq$ 200	3	3
3	0.125	$\leq$ 200	4	4
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

For intra-band SRS carrier switching in FR1 or FR2, interruptions in Table 5.5.2.0.4-1 and in Table 5.5.2.0.4-2 based on SRS carrier switching time $\leq$ 200us shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 5.5.2.0.4-1 and in Table 5.5.2.0.4-2 shall apply.

The normative reference for this requirement is TS 38.133 [6] clause 8.2.1.2.12.

5.5.2.0.5 Minimum conformance requirements for interruptions at E-UTRA SRS carrier based switching

A PUSCH-less carrier of E-UTRA SCell is a TDD carrier without PUCCH/PUSCH configured. When a UE needs to transmit periodic or aperiodic SRS [23] and/or non-contention based PRACH on a PUSCH-less carrier of E-UTRA SCell, the UE can perform carrier based switching to one or more PUSCH-less carrier of E-UTRA SCells from a E-UTRA carrier with PUSCH or from another PUSCH-less E-UTRA carrier of SCell prior to transmitting SRS and/or PRACH, provided that:

- switching is from a configured E-UTRA carrier to another activated TDD E-UTRA carrier;
- the PUSCH-less carrier of E-UTRA SCells to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission or configured via RRC [15] for periodic SRS transmission;
- the E-UTRA serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex [15];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS36.213 [26];
- the SRS switching is not colliding with PDCCH in subframe 0 and 5 as specified in TS36.213 [26];
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 36.331 [2], and is compliant to the requirements for inter-band CA with uplink in one E-UTRA band and without simultaneous Rx/Tx specified in TS 36.101 [25], the SRS or RACH transmission are not simultaneously scheduled with DL subframe #0 or DL subframe #5 on other E-UTRA carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching to the PUSCH-less carrier of a serving cell,

- with up to X3 slot as specified in Table 5.5.2.0.5-1.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching from the PUSCH-less carrier of a serving cell,

- with up to X3 slot as specified in Table 5.5.2.0.5-1

Table 5.5.2.0.5-1: Interruption length X3 (slot)

μ	NR Slot length (ms)	Interruption length X3 (slots)
0	1	2
1	0.5	3
2	0.25	5
3	0.125	9

The normative reference for this requirement is TS 38.133 [6] clause 8.2.1.2.13.

5.5.2.1 EN-DC FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.5.2.1.1 Test purpose

The purpose of this test is:

- To verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits.

- To verify the missed ACK/NACK rate for NR PSCell in EN-DC.

5.5.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and long DRX cycle.

5.5.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.2.1.

5.5.2.1.4 Test description

5.5.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.2.1.4.1-1.

Table 5.5.2.1.4.1-1: Supported test configurations for EN-DC FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Configuration	Description
5.5.2.1-1	LTE FDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.2.1-2	LTE TDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 5.5.2.1.4.1-2.

Table 5.5.2.1.4.1-2: Initial conditions for EN-DC FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.2.1.4.1-3.
2. Message contents are defined in clause 5.5.2.1.4.3.
3. There are one E-UTRAN carrier and one NR carrier and two cells in the test. Cell 1 is PCell on the E-UTRAN carrier, Cell 2 is PSCell on the NR carrier, Cell 1 is the cell used for connection setup with the power levels set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clause C.1.1 and C.1.2.

Table 5.5.2.1.4.1-3: General test parameters for EN-DC FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to cell1 and cell 2
DRX		DRX.4	DRX related parameters are defined in TS 38.133 Table A.3.3.4-1
Measurement gap pattern Id		OFF	
T1	s	6.25	

5.5.2.1.4.2 Test procedure

The test consists of two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell1 and Cell2. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall transmit an *RRCConnectionReconfiguration* message to configure PCell (Cell1) and PSCell (Cell2) on the MCG and SCG as per TS 36.508 [7] clause 4.6 with the message content exceptions defined in clause 5.5.2.1.4.3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

5. The SS would ensure continuous transmission on PSCell, while not scheduling on PCell at least for 200 ms to ensure inactivity timer is expired on the UE for LTE PCell.

6. Set the parameters according to T1 in Table 5.5.2.1.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

7. SS schedules on PSCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PSCell.

8. If more than 99% of uplink transmissions are received by SS then count a success for the event “ACK/NACK”. Otherwise count a fail for the event “ACK/NACK”.

9. If no two consecutive missing PUCCH transmissions are observed by the SS, then count a success for the event “DTX”. Otherwise count a fail for the event “DTX”.

10. After the RRC connection release, the SS:

    - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),

    or

    - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 3-10 until a test verdict has been achieved

Each of the events "ACK/NACK" and "DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

5.5.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-2 with Condition DRX.4

5.5.2.1.5 Test requirement

Table 5.5.2.1.4.1-1, 5.5.2.1.5-1 and 5.5.2.1.5-2 define the NR cell specific primary level settings including test tolerances for EN-DC FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC test.

Table 5.5.2.1.5-1: NR cell specific test parameters for EN-DC FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Unit	Cell 2
Frequency Range		FR2

Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1,2		66
Initial DL BWP Configuration	Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET parameters	Config 1,2		CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.3 FR2
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$		dB	17
Propagation Condition			AWGN
Time offset to cell1 Note 2		µs	3
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells			

Table 5.5.2.1.5-2: NR cell specific OTA related test parameters for EN-DC FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.9.1
Assumption for UE beams Note 6		Fine
N_{oc} Note1	dBm/15kHz Note4	-112
N_{oc} Note1	dBm/SCS Note3	-102.97
$\hat{E}_s/N_{oc}$	dB	17
SSB_RP Note2	dBm/SCS Note4	-85.97
$\hat{E}_s/I_{ot}$	dB	17
Io Note2	dBm/95.04 MHz Note4	-56.90

NOTE 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 6:	Information about types of UE beam is given in B.2.1.3 of TS 38.133[6], and does not limit UE implementation or test system implementation

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed 0.625ms (5 slots) as defined in clause TS 38.133 clause 8.2.1.

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.2.2 EN-DC FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.5.2.2.1 Test purpose

The purpose of this test is:

- To verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits.

- To verify the missed ACK/NACK rate for NR PSCell in EN-DC.

5.5.2.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and long DRX cycle.

5.5.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.2.2.

5.5.2.2.4 Test description

5.5.2.2.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 5.5.2.2.4.1-1.

Table 5.5.2.2.4.1-1: Supported test configurations for EN-DC FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Configuration	Description

5.5.2.2-1	LTE FDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.2.2-2	LTE TDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 5.5.2.2.4.1-2.

Table 5.5.2.2.4.1-2: Initial conditions for EN-DC FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.2.2.4.1-3.
2. Message contents are defined in clause 5.5.2.2.4.3.
3. There are one E-UTRAN carrier and one NR carrier and two cells in the test. Cell 1 is PCell on the E-UTRAN carrier, Cell 2 is PSCell on the NR carrier, Cell 1 is the cell used for connection setup with the power levels set according to Table A.6.1.1-1 for this test. Cell 2 is configured according to clause C.1.1 and C.1.2.

Table 5.5.2.2.4.1-3: General test parameters for EN-DC FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to cell1 and cell 2
DRX		DRX.4	DRX related parameters are defined in TS 38.133 Table A.3.3.4-1
Measurement gap pattern Id		OFF	
T1	s	6.25	

5.5.2.2.4.2 Test procedure

The test consists of two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell1 and Cell2. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels.
3. The SS shall transmit an *RRCConnectionReconfiguration* message to configure PCell (Cell1) and PSCell (Cell2) on the MCG and SCG as per TS 36.508 [7] clause 4.6 with the message content exceptions defined in clause 5.5.2.2.4.3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.
5. The SS would ensure continuous transmission on PSCell, while not scheduling on PCell at least for 200 ms to ensure inactivity timer is expired on the UE for LTE PCell.
6. Set the parameters according to T1 in Table 5.5.2.2.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.
7. SS schedules on PSCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PSCell.
8. If more than 99% of uplink transmissions are received by SS then count a success for the event “ACK/NACK”. Otherwise count a fail for the event “ACK/NACK”.
9. If no two consecutive missing PUCCH transmissions are observed by the SS, then count a success for the event “DTX”. Otherwise count a fail for the event “DTX”.
10. After the RRC connection release, the SS:

    - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),

    or

    - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 3-10 until a test verdict has been achieved

Each of the events "ACK/NACK" and "DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

5.5.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.2.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-2 with Condition DRX.4

5.5.2.2.5 Test requirement

Table 5.5.2.2.4.1-1, 5.5.2.2.5-1 and 5.5.2.2.5-2 define the NR cell specific primary level settings including test tolerances for EN-DC FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC test.

Table 5.5.2.2.5-1: NR cell specific test parameters for EN-DC FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1

$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1,2		66
Initial DL BWP Configuration	Config 1,2		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,2		DLBWP.1.1
Initial UL BWP configuration	Config 1,2		ULBWP.0.1
Dedicated UL BWP configuration	Config 1,2		ULBWP.1.1
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET parameters	Config 1,2		CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.3 FR2
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$		dB	17
Propagation Condition			AWGN
Time offset to cell1 Note 2		µs	62.5
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells			

Table 5.5.2.2.5-2: NR cell specific OTA related test parameters for EN-DC FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.9.1
Assumption for UE beams Note 6		Fine
N_{oc} Note1	dBm/15kHz Note4	-112
N_{oc} Note1	dBm/SCS Note3	-102.97
$\hat{E}_s / N_{oc}$	dB	17
SSB_RP Note2	dBm/SCS Note4	-85.97
$\hat{E}_s / I_{ot}$	dB	17
Io Note2	dBm/95.04 MHz Note4	-56.90

NOTE 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 6:	Information about types of UE beam is given in B.2.1.3 of TS 38.133[6], and does not limit UE implementation or test system implementation

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed 0.625ms (5 slots) as defined in TS 38.133 clause 8.2.1.

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.2.3 EN-DC FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.5.2.3.1 Test purpose

The purpose of this test is:

- To verify NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits.

- To verify the missed ACK/NACK rate for NR PSCell in EN-DC.

5.5.2.3.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC. and 2 DL CA

5.5.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.2.3.

5.5.2.3.4 Test description

5.5.2.3.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 5.5.2.3.4.1-1.

Table 5.5.2.3.4.1-1: Supported test configurations for EN-DC FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Configuration	Description
5.5.2.3-1	LTE FDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

5.5.2.3-2	LTE TDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.2.3.4.1-2.

Table 5.5.2.3.4.1-2: Initial conditions for EN-DC FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.2.3.4.1-3.
2. Message contents are defined in clause 5.5.2.3.4.3.
3. There are three cells (one E-UTRAN carrier and two NR carriers) specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on one NR carrier and Cell 3 is the SCell on the other NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 and Cell 3 shall be configured according to clause C.1.1 and C.1.2.

Table 5.5.2.3.4.1-3: General test parameters for EN-DC FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to cell1, cell 2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

5.5.2.3.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN PCell, Cell2 is NR PSCell and Cell3 is deactivated NR SCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected and fully synchronized to Cell1, Cell2 and Cell3. The point in time at which the RRC message including *measCycleSCell* for the deactivated NR SCell is received by the UE, defines the start of time period T1. During T1 the UE shall be continuously scheduled on E-UTRAN PCell DL and NR PSCell DL.

Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Message contents are defined in clause 5.5.2.3.4.3.

2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels. Set the parameters according to values in Table 5.5.2.3.4.1-3 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message including *measCycleSCell* for the deactivated NR SCell.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. Set the parameters according to T1 in Table 5.5.2.3.5-1 and Table 5.5.2.3.5-2. Propagation conditions are set according to clause C.2.2.
6. SS schedules on PSCell continuously and UE shall start sending ACK/NACK reports. T1 starts. During T1, the SS shall monitor ACK/NACK/DTX on PSCell.
7. If more than 99.5% of uplink transmissions are received by SS then count a success for the event "ACK/NACK". Otherwise count a fail for the event "ACK/NACK".
8. If no longer than X consecutive DTXs are observed by the SS, then count a success for the event "DTX". Otherwise count a fail for the event "DTX", where,

   - X = 6 if the NR PSCell is not in the same band as the deactivated SCell, otherwise X = 16.

9. After T1 expires, the SS shall transmit an RRC connection release. Afterwards, the SS shall:

   9a. transmit in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and go back to step 1 to prepare for the next iteration. If the paging fails, proceed as per step 9b

   or

   9b. switch off and on the UE and go back to step 1 to prepare for the next iteration.

10. Repeat steps 1-9 until a test verdict has been achieved.

Each of the events "ACK/NACK" and "DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

5.5.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 5.5.2.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Specific message contents exceptions for Test Configuration 5.5.2.3-1 and 5.5.2.3-2	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.1 FR2
Default RRC messages and information elements contents exceptions	Table H.3.1-1; Table H.3.1-2 with Condition Deactivated SCell; Table H.3.1-3 with Condition Deactivated SCell, SSB.1 FR2 and SMTC.1; Table H.3.1-4 with A3-offset = -6dB; Table H.3.1-7 with Condition Deactivated SCell;

5.5.2.3.5 Test requirement

Table 5.5.2.3.5-1 and Table 5.5.2.3.5-2 define the primary level settings including test tolerances for FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC test configurations.

Table 5.5.2.3.5-1: NR cell specific test parameters for EN-DC FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3

Frequency Range			FR2	FR2
Duplex mode	Config 1,2		TDD	TDD
TDD configuration	Config 1,2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1,2		66	66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1	DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1	DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1	ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1	ULBWP.1.1
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	-
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR 3.1 TDD	CCR 3.1 TDD
OCNG Patterns			OP.1	OP.1
SSB Configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2
SMTC Configuration	Config 1,2		SMTC.1	SMTC.1
TRS configuration	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0	TCI.State.0
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Time offset to cell1 Note 2		µs	3	3+ Time offset to cell2
Time offset to cell2 Note 3		µs	-	3

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells
Note 3: Receive time difference of signals received between slot timing boundary from two NR Cells including time alignment error between the two cells

Table 5.5.2.3.5-2: NR cell specific OTA related test parameters for EN-DC FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Angle of arrival configuration			Setup 1 defined in clause A.9	
Assumption for UE beams Note 6			Fine	Rough
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-111.7	-104.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS Note3	-102.7	-95.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
SSB_RP Note2	NR_TDD_FR2_A	dBm/SCS Note4	-90.7	-90.7

	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
$\hat{E}_s/I_{ot}$	NR_TDD_FR2_A	dB	12	5
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
$\hat{E}_s/N_{oc}$	NR_TDD_FR2_A	dB	12	5
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-61.45	-60.52
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table 5.5.2.3.5-3.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on NR PSCell no earlier than 4 slots before an SMTC and no later than 4 slots after the SMTC. The interruption on NR PSCell shall not exceed the value defined in Table 5.5.2.3.5-4.

Table 5.5.2.3.5-3: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	4

Table 5.5.2.3.5-4: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	8 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.2.4 EN-DC FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.5.2.4.1 Test purpose

The purpose of this test is:

- To verify NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits.

- To verify the missed ACK/NACK rate for NR PSCell in EN-DC.

5.5.2.4.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC and 2 DL CA.

5.5.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.2.4.

5.5.2.4.4 Test description

5.5.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.2.4.4.1-1.

Table 5.5.2.4.4.1-1: Supported test configurations for EN-DC FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Configuration	Description
5.5.2.4-1	LTE FDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.2.4-2	LTE TDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.2.4.4.1-2.

Table 5.5.2.4.4.1-2: Initial conditions for EN-DC FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.2.4.4.1-3.

2. Message contents are defined in clause 5.5.2.4.4.3.

3. There are three cells (one E-UTRAN carrier and two NR carriers) specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on one NR carrier and Cell 3 is the SCell on the other NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 and Cell 3 shall be configured according to clause C.1.1 and C.1.2.

Table 5.5.2.4.4.1-3: General test parameters for EN-DC FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to cell1, cell 2 and cell3
AoA number		1	Applicable to cell2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

5.5.2.4.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN PCell, Cell2 is NR PSCell and Cell3 is deactivated NR SCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected and fully synchronized to Cell1, Cell2 and Cell3. The point in time at which the RRC message including *measCycleSCell* for the deactivated NR SCell is received by the UE, defines the start of time period T1. During T1 the UE shall be continuously scheduled on E-UTRAN PCell DL and NR PSCell DL.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Message contents are defined in clause 5.5.2.4.4.3.

2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels. Set the parameters according to values in Table 5.5.2.3.4.1-3 as appropriate.

3. The SS shall transmit an *RRCReconfiguration* message including *measCycleSCell* for the deactivated NR SCell.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. Set the parameters according to T1 in Table 5.5.2.4.5-1 and Table 5.5.2.4.5-2. Propagation conditions are set according to clause C.2.2.

6. SS schedules on PSCell continuously and UE shall start sending ACK/NACK reports. T1 starts. During T1, the SS shall monitor ACK/NACK/DTX on PSCell.

7. If more than 99.5% of uplink transmissions are received by SS then count a success for the event “ACK/NACK”. Otherwise count a fail for the event “ACK/NACK”.

8. If no longer than X consecutive DTX is observed by the SS, then count a success for the event “DTX”. Otherwise count a fail for the event “DTX”, where,

   - X = 6 if the NR PSCell is not in the same band as the deactivated SCell, otherwise X = 16.

9. After T1 expires, the SS shall transmit an RRC connection release. Afterwards, the SS shall:

9a. transmit in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and go back to step 1 to prepare for the next iteration. If the paging fails, proceed as per step 9b

or

9b. switch off and on the UE and go back to step 1 to prepare for the next iteration.

10. Repeat steps 1-9 until a test verdict has been achieved.

Each of the events "ACK/NACK" and "DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

5.5.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 5.5.2.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Specific message contents exceptions for Test Configuration 5.5.2.4-1 and 5.5.2.4-2	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.1 FR2
Default RRC messages and information elements contents exceptions	Table H.3.1-1; Table H.3.1-2 with Condition Deactivated SCell; Table H.3.1-3 with Condition Deactivated SCell, SSB.1 FR2 and SMTC.1; Table H.3.1-4 with A3-offset = -6dB; Table H.3.1-7 with Condition Deactivated SCell;

5.5.2.4.5 Test requirement

Table 5.5.2.4.5-1 and Table 5.5.2.4.5-2 define the primary level settings including test tolerances for FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC test configurations.

Table 5.5.2.4.5-1: NR cell specific test parameters for EN-DC FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Frequency Range			FR2	FR2
Duplex mode	Config 1,2		TDD	TDD
TDD configuration	Config 1,2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1,2		66	66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1	
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1	
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1	
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1	
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	-
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD
OCNG Patterns			OP.1	OP.1
SSB Configuration			SSB.1 FR2	SSB.1 FR2
SMTC Configuration	Config 1,2		SMTC.1	SMTC.1
TRS configuration	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD

TCI state	Config 1,2		TCI.State.0	TCI.State.0
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Time offset to cell1 Note 2		µs	62.5	62.5+ Time offset to cell2
Time offset to cell2 Note 3		µs	-	3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells Note 3: Receive time difference of signals received between slot timing boundary from two NR Cells including time alignment error between the two cells				

Table 5.5.2.4.5-2: NR cell specific OTA related test parameters for EN-DC FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Angle of arrival configuration			Setup 1 defined in clause A.9	
Assumption for UE beams Note 6			Fine	Rough
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-111.7	-104.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS Note3	-102.7	-95.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
SSB_RP Note2	NR_TDD_FR2_A	dBm/SCS Note4	-90.7	-90.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
$\hat{E}_s/I_{ot}$		dB	12	5
$\hat{E}_s/N_{oc}$		dB	12	5
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-61.45	-60.52
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone				

Note 6:	Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PSCell on NR PSCell immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table 5.5.2.4.5-3.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on NR PSCell no earlier than 4 slots before an SMTC and no later than 4 slots after the SMTC. The interruption on NR PSCell shall not exceed the value defined in Table 5.5.2.4.2-4.

Table 5.5.2.4.5-3: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	4

Table 5.5.2.4.2-4: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	8 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.2.5 EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Editor's note:

- Connection diagram is TBD.

- Test tolerance is missing.

- Test procedure may be further modified.

5.5.2.5.1 Test purpose

The purpose of this test is:

- To verify NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits.

- To verify the missed ACK/NACK rate for NR PSCell in EN-DC.

5.5.2.5.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

5.5.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.2.5.

5.5.2.5.4 Test description

5.5.2.5.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 5.5.2.5.4.1-1.

Table 5.5.2.5.4.1-1: Supported test configurations for EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Configuration	Description
5.5.2.5-1	LTE FDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.2.5-2	LTE TDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 5.5.2.5.4.1-2.

Table 5.5.2.5.4.1-2: Initial conditions for EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.TBD	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.2.5.4.1-3.
2. Message contents are defined in clause 5.5.2.5.4.3.
3. There are two E-UTRAN carriers and one NR carrier and three cells specified in the test. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR2 PSCell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 and Cell 3 shall be configured according to clause C.1.1 and C.1.2.

Table 5.5.2.5.4.1-3: General test parameters for EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other two are NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 2.
CP length		Normal	Applicable to cell1, cell 2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

5.5.2.5.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR2 PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell1, Cell2 and Cell3. Cell1 shall be configured as E-UTRAN

PCell, Cell2 shall be configured as NR PSCell and Cell3 shall be configured as E-UTRAN deactivated SCell. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the E-UTRAN SCell is received by the UE, defines the start of time period T1. During T1 the UE shall be continuously scheduled on E-UTRAN PCell and NR PSCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall transmit an *RRCConnectionReconfiguration* message including *measCycleSCell* or *allowInterruptions* for the deactivated E-UTRAN SCell to perform measurements on the deactivated SCC.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

5. Set the parameters according to T1 in Table 5.5.2.5.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

6. SS schedules on PSCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PSCell.

7. If more than 99.5% of uplink transmissions are received by SS then count a success for the event “ACK/NACK”. Otherwise count a fail for the event “ACK/NACK”.

8. If no longer than 8 consecutive DTX is observed by the SS, then count a success for the event “DTX”. Otherwise count a fail for the event “DTX”.

9. After the RRC connection release, the SS:

   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),

   or

   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 3-9 until a test verdict has been achieved.

Each of the events "ACK/NACK" and "DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

5.5.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 5.5.2.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	

Table 5.5.2.5.4.3-2: MeasObjectEUTRA for E-UTRAN deactivated SCell

Derivation Path: 36.508 Table 4.6.6-2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectEUTRA ::= SEQUENCE {			
carrierFreq	Downlink EARFCN for E-UTRAN SCell		
measCycleSCell-r10	sf640		
}			

5.5.2.5.5 Test requirement

Table 5.5.2.5.5-1 and Table 5.5.2.5.5-2 defines the primary level settings including test tolerances for E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC test configurations.

Table 5.5.2.5.5-1: NR cell specific test parameters for EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TBD
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66
Initial BWP Configuration	Config 1,2		TBD
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET parameters	Config 1,2		CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		TBD
OCNG Patterns			OP.1
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$		dB	TBD+TT
Propagation Condition			AWGN
Time offset to cell1 Note 2		µs	3
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
NOTE 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells			

Table 5.5.2.5.5-2: NR cell specific OTA related test parameters for EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter		Unit	Cell 2
UE orientation around TBD axis and TBD axis			TBD
Relative difference in angle of arrival of cell 2 relative to cell 1		degrees	TBD
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz Note4	TBD+TT
	NR_TDD_FR2_B		
	NR_TDD_FR2_C		
	NR_TDD_FR2_D		
	NR_TDD_FR2_E		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_A	dBm/SCS Note3	TBD+TT

Parameter		Unit	Cell 2
N_{oc} Note1	NR_TDD_FR2_B		
	NR_TDD_FR2_C		
	NR_TDD_FR2_D		
	NR_TDD_FR2_E		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note4	TBD+TT
	NR_TDD_FR2_B		
	NR_TDD_FR2_C		
	NR_TDD_FR2_D		
	NR_TDD_FR2_E		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
$\hat{E}_s / I_{ot}$		dB	TBD+TT
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	TBD+TT
NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.			
NOTE 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
NOTE 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone			
NOTE 5: As observed with 0dBi gain antenna at the centre of the quiet zone			

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table 5.5.2.5.5-3.

Table 5.5.2.5.5-3: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	5

Table 5.5.2.5.5-4: Void

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.2.6 EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Editor's note:

- Connection diagram is TBD.

- Test tolerance is missing.

- Test procedure may be further modified.

5.5.2.6.1 Test purpose

The purpose of this test is:

- To verify NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits.

-To verify the missed ACK/NACK rate for NR PSCell in EN-DC.

5.5.2.6.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward supporting EN-DC.

5.5.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.2.6.

5.5.2.6.4 Test description

5.5.2.6.4.1 Initial conditions

Test 5.5.2.6 can be run in one of the configurations defined in Table 5.5.2.6.4.1-1.

Table 5.5.2.6.4.1-1: Supported test configurations for EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Configuration	Description
5.5.2.6-1	LTE FDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.2.6-2	LTE TDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 5.5.2.6.4.1-2.

Table 5.5.2.6.4.1-2: Initial conditions for EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.TBD	
Exceptions to connection diagram	N/A		

2. The general test parameter settings are set up according to Table 5.5.2.6.4.1-3.

4. Message contents are defined in clause 5.5.2.6.4.3.

5. There are two E-UTRAN carriers and one NR carrier and three cells specified in the test. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR2 PSCell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 and Cell 3 shall be configured according to clause C.1.1 and C.1.2.

Table 5.5.2.6.4.1-3: General test parameters for EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other two are NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 2.
CP length		Normal	Applicable to cell1, cell 2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	

SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

5.5.2.6.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR2 PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell1, Cell2 and Cell3. Cell1 shall be configured as E-UTRAN PCell, Cell2 shall be configured as NR PSCell and Cell3 shall be configured as E-UTRAN deactivated SCell. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the E-UTRAN SCell is received by the UE, defines the start of time period T1. During T1 the UE shall be continuously scheduled on E-UTRAN PCell and NR PSCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure MCG according to TS 36.521-3 [26] clause C.0, C.1 and SCG according to clause C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall transmit an *RRCConnectionReconfiguration* message including *measCycleSCell* or *allowInterruptions* for the deactivated E-UTRAN SCell to perform measurements on the deactivated SCC.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

5. Set the parameters according to T1 in Table 5.5.2.6.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

6. SS schedules on PSCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PSCell.

7. If more than 99.5% of uplink transmissions are received by SS then count a success for the event “ACK/NACK”. Otherwise count a fail for the event “ACK/NACK”.

8. If no longer than 8 consecutive DTX is observed by the SS, then count a success for the event “DTX”. Otherwise count a fail for the event “DTX”.

9. After the RRC connection release, the SS:

   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),

   or

   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 3-9 until a test verdict has been achieved.

Each of the events "ACK/NACK" and "DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

5.5.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 5.5.2.6.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	

Table 5.5.2.6.4.3-2: MeasObjectEUTRA for EUTRAN deactivated SCell

Derivation Path: 36.508 Table 4.6.6-2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectEUTRA ::= SEQUENCE {			
carrierFreq	Downlink EARFCN for E-UTRAN SCell		
measCycleSCell-r10	sf640		
}			

5.5.2.6.5 Test requirement

Table 5.5.2.6.5-1 and Table 5.5.2.6.5-2 defines the primary level settings including test tolerances for E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC test configurations.

Table 5.5.2.6.5-1: NR cell specific test parameters for EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TBD
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66
Initial BWP Configuration	Config 1,2		TBD
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET parameters	Config 1,2		CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		TBD
OCNG Patterns			OP.1
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$		dB	TBD
Propagation Condition			AWGN
Time offset to cell1 Note 2		µs	62.5

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells

Table 5.5.2.6.5-2: NR cell specific OTA related test parameters for EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter	Unit	Cell 2
UE orientation around TBD axis and TBD axis		TBD

Relative difference in angle of arrival of cell 2 relative to cell 1		degrees	TBD
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz Note4	TBD
	NR_TDD_FR2_B		
	NR_TDD_FR2_C		
	NR_TDD_FR2_D		
	NR_TDD_FR2_E		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS Note3	TBD
	NR_TDD_FR2_B		
	NR_TDD_FR2_C		
	NR_TDD_FR2_D		
	NR_TDD_FR2_E		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note4	TBD
	NR_TDD_FR2_B		
	NR_TDD_FR2_C		
	NR_TDD_FR2_D		
	NR_TDD_FR2_E		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
$\hat{E}_s / I_{ot}$		dB	TBD
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	TBD
NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.			
NOTE 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
NOTE 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the center of the quiet zone			
NOTE 5: As observed with 0dBi gain antenna at the center of the quiet zone			

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table 5.5.2.6.5-3.

Table 5.5.2.6.5-3: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
3	0.125	5

Table 5.5.2.6.5-4: Void

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.2.7 E-UTRAN - NR FR2 interruptions at E-UTRA SRS carrier based switching

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Test applicability needs to be updated
- Test procedure needs to be corrected to reflect the interruption criteria
- E-UTRA - FR2 OTA testability is still FFS.

5.5.2.7.1 Test purpose

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during carrier-based switching to one PUSCH-less SCCs from a CC with PUSCH, when a UE needs to transmit aperiodic SRS.

5.5.2.7.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward supporting EN-DC and 2 DL CA in E-UTRA.

5.5.2.7.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 5.5.2.0.5.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.2.7.

5.5.2.7.4 Test description

5.5.2.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.2.7.4.1-1.

Table 5.5.2.7.4.1-1: Supported test configurations for EN-DC FR1 interruptions at E-UTRA SRS carrier based switching

Configuration	Description
5.5.2.7-1	LTE FDD(cell1), LTE TDD (cell3), NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.2.7-2	LTE TDD(cell1), LTE TDD (cell3), NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE.1: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 5.5.2.7.4.1-2.

Table 5.5.2.7.4.1-2: Initial conditions for EN-DC FR1 interruptions at SRS carrier based switching in asynchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.2.7.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.2.7.4.1-3.
2. Message contents are defined in clause 5.5.2.7.4.3.
3. There are two E-UTRA carriers and one NR carrier, and three cells specified in the test. Each cell is on a different carrier. Cell1 Is E-UTRAN PCell, Cell2 is NR FR1 PSCell and Cell 3 is E-UTRA activated Scell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 shall be configured according to clauses C.1.1 and C.1.2.

Table 5.5.2.7.4.1-3: General test parameters for EN-DC FR2 interruptions at E-UTRA SRS carrier based switching

Parameter	Unit	Value	Comment

RF Channel Number		1, 2, 3	One is NR RF channel and the other two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Activated SCell		Cell3	SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
T1	s	0.2	
T2	s	0.2	UE shall perform SRS switching during T2

Table 5.5.2.7.4.1-4: Sounding Reference Symbol Configuration for E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

Field	Value	Comment
srsBandwidthConfiguration	bw5	
srsSubframeConfiguration	Sc8	Once every 5 subframes
ackNackSrsSimultaneousTransmission	FALSE	
srsMaxUpPTS	N/A	Not applicable
srsBandwidth	0	No hopping
srsHoppingBandwidth	hbw0	
frequencyDomainPosition	0	
Duration	TRUE	Indefinite duration
Srs-ConfigIndexAp	17	SRS periodicity of 10ms. See Table 8.2-5 in TS 36.213 for aperiodic SRS transmission.
transmissionComb	0	
cyclicShift	cs0	No cyclic shift
SRS-AntennaPort	an1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 36.331.		

5.5.2.7.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN Pcell, Cell2 is NR FR1 PSCell with PUCCH/PUSCH transmission, Cell3 is E-UTRAN activated SCell which operates in downlink without PUCCH/PUSCH. The test consists of two time periods, with duration of T1 and T2. Prior to the start of the test, the UE is configured with the SRS carrier based switching between PCell and SCell. UE shall also indicate SRS-SwitchingTimeNR in the capabilities.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG_and_SCG, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.7.

2. Configure MCG according to TS 36.521-3 [26] Annex C.0, C.1 and SCG according to Annex C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall configure SCell (Cell 3) on the SCC as per TS 36.508 [25] clause 5.2A, with the message content exceptions defined in clause 4.5.2.9.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

4. Set the parameters according to T1 in Table 4.5.2.9.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

5. The SS activates Scell (Cell3) and starts to schedule DL transmission continuously on PCell and PSCell.

6. Set the parameters according to T2 in Tables 4.5.2.9.5-1. T2 starts.

7. Immediately at the beginning of T2, SRS is requested via DCI format 2_3 and the UE shall initiate NR SRS switching.

8. If the interruption on NR PSCell during the switching from NR PSCell to E-UTRA SCell exceeds the value as defined in Table 4.5.2.9.5-2, increase the number of failed iterations by one and move to step 12, otherwise increase the number of passed iterations by one and continue with step 9.

9. The SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

10. The SS then shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

11. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

12. Repeat step 2-11 until a test verdict has been achieved.5.5.2.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions.

Table 5.5.2.7.4.3-1: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
uplinkConfig SEQUENCE {			
carrierSwitching	*SRS-CarrierSwitching*		
}			
}			

Table 5.5.2.7.4.3-2: *SRS-CarrierSwitching*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-181			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-CarrierSwitching ::= SEQUENCE {			
srs-SwitchFromServCellIndex	0		
srs-SwitchFromCarrier	nUL		
}			

Table 5.5.2.7.4.3-3: SoundingRS-UL-Config

Derivation Path: 36.508 Table 4.6.3-22			
Information Element	**Value/remark**	**Comment**	**Condition**
SoundingRS-UL-ConfigDedicated-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
srs-BandwidthConfig	bw5		
srsSubframeConfig	Sc8		
ackNackSrsSimultaneousTransmission	FALSE		
srs-HoppingBandwidth	hbw0		
freqDomainPosition	0		
duration	TRUE		
srs-ConfigIndex	47	See Table 8.2-1 in TS 36.213	FDD
transmissionComb	0		
cyclicShift	cs0		

SRS-AntennaPort	an1		
}			
}			

5.5.2.7.5 Test requirement

Tables 5.5.2.7.5-1 and 5.5.2.7.5-2 define the primary level settings including test tolerances for EN-DC FR2 interruptions at E-UTRA SRS carrier based switching in asynchronous EN-DC.

Table 5.5.2.7.5-1: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

Parameter		Unit	Cell 2
Frequency Range			**FR2**
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		[TDDConf.3.2]
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$		dB	17
Propagation Condition			AWGN
Time offset to cell1 Note 2		ms	3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells			

Table 5.5.2.7.5-2: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.9.1
Assumption for UE beams Note 6		Fine
N_{oc} Note1	dBm/15kHz Note4	-112

N_{oc} Note1	dBm/SCS Note3	-102.97
$\hat{E}_s / N_{oc}$	dB	17
SS-RSRP Note2	dBm/SCS Note4	-85.97
$\hat{E}_s / I_{ot}$	dB	17
Io Note2	dBm/95.04 MHz Note4	-56.90
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone		
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone		
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

The UE shall be continuously scheduled in NR FR2 PSCell throughout the test. During T2 two interruption time periods are allowed on Cell2 and Cell1, each interruption due to SRS carrier based switching on Cell2 shall not exceed X defined in Table A.5.5.2.7.2-1.

Table 5.5.2.7.5-3: Interruption length X (slot) E-UTRAN – NR at E-UTRA SRS carrier based switching

μ	NR Slot length (ms)	Interruption length X (slots)
2	0.25	5
3	0.125	9

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

5.5.2.8 E-UTRAN - NR FR2 interruptions at NR SRS carrier based switching

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Test applicability needs to be updated
- Test procedure needs to be corrected to reflect the interruption criteria
- E-UTRA - FR2 OTA testability is still FFS.

5.5.2.8.1 Test purpose

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during carrier-based switching to one carrier not configured for PUCCH/PUSCH transmission from a CC with PUCCH/PUSCH transmission, when a UE needs to transmit aperiodic SRS.

5.5.2.8.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward supporting EN-DC and 2 DL CA in NR.

5.5.2.8.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 5.5.2.0.5.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.2.8.

5.5.2.8.4 Test description

5.5.2.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.2.8.4.1-1.

Table 5.5.2.8.4.1-1: Supported test configurations for EN-DC FR2 interruptions at NR SRS carrier based switching

Configuration	Description
5.5.2.8-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.2.8-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE.1: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 5.5.2.8.4.1-2.

Table 5.5.2.8.4.1-2: Initial conditions for EN-DC FR1 interruptions at SRS carrier based switching in asynchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.2.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.2.8.4.1-3.
2. Message contents are defined in clause 5.5.2.8.4.3.
3. There are two NR carriers and one E-UTRA carrier, and three cells specified in the test. Each cell is on a different carrier. Cell1 is E-UTRAN PCell, Cell2 is NR FR2 PSCell and Cell 3 is NR activated Scell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 and Cell 3 shall be configured according to clauses C.1.1 and C.1.2.

Table 5.5.2.8.4.1-3: General test parameters for EN-DC FR2 interruptions at NR SRS carrier based switching

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured SCell		Cell3	SCell on NR RF channel number 3.
CP length		Normal	Applicable to cell1 and cell 2
DRX		OFF	
Measurement gap pattern Id		OFF	
T1	s	5	
T2	s	0.1	

5.5.2.8.4.2 Test procedure

The test consists of three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN Pcell, Cell2 is NR FR1 PSCell with PUCCH/PUSCH transmission, Cell3 is activated SCell which operates in downlink without PUCCH/PUSCH. The test

consists of two time periods, with duration of T1 and T2. Prior to the start of the test, the UE is configured with the SRS carrier based switching between PSCell and SCell. UE shall also indicate SRS-SwitchingTimeNR in the capabilities.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG_and_SCG, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.7.

2. Configure MCG according to TS 36.521-3 [26] Annex C.0, C.1 and SCG according to Annex C.1.1 and C.1.2 for all downlink physical channels.

3. The SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.\

4. Set the parameters according to T1 in Table 5.5.2.8.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

5. The SS activates Scell (Cell3) and starts to schedule DL transmission continuously on PCell and PSCell.

6. Set the parameters according to T2 in Tables 5.5.2.8.5-1. T2 starts.

7. Immediately at the beginning of T2, SRS is requested via DCI format 2_3 and the UE shall initiate NR SRS switching.

8. If the interruption on NR PSCell during the switching from NR PSCell to NR SCell exceeds the value as defined in Table 5.5.2.8.5-2 or the interruption on E-UTRAN PCell during the switching from NR PSCell to NR SCell exceeds the value as defined in Table 4.5.2.9.5-3, increase the number of failed iterations by one and move to step 12, otherwise increase the number of passed iterations by one and continue with step 9.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

10. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

11. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5

12. Repeat step 2-11 until a test verdict has been achieved.

5.5.2.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions.

Table 5.5.2.8.4.3-1: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
uplinkConfig SEQUENCE {			
carrierSwitching	*SRS-CarrierSwitching*		
}			
}			

Table 5.5.2.8.4.3-2: *SRS-CarrierSwitching*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-181			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-CarrierSwitching ::= SEQUENCE {			

srs-SwitchFromServCellIndex	1		
srs-SwitchFromCarrier	nUL		
}			

Table 5.5.2.8.4.3-3: SRS-Config

Derivation Path: TS 38.508-1 [14], Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SRS-ResourceSet {	1 entry		
SRS-ResourceSet[1] SEQUENCE {		entry 1	
srs-ResourceSetId	0		
srs-ResourceIdList SEQUENCE (SIZE(1..maxNrofSRS-ResourcesPerSet)) OF SRS-ResourceId {	1 entry		
SRS-ResourceId[1]	0	entry 1	
}			
resourceType CHOICE {			
aperiodic SEQUENCE {			
}			
}			
usage	antennaSwitching		
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SRS-Resource {	1 entry		
SRS-Resource[1] SEQUENCE {		entry 1	
resourceMapping SEQUENCE {			
startPosition	1		
nrofSymbols	n1		
repetitionFactor	n1		
}			
freqDomainPosition	0		
freqDomainShift	0		
freqHopping SEQUENCE {			
c-SRS	12		
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			
aperiodic SEQUENCE {			
}			
}			
}			
}			
}			

5.5.2.8.5 Test requirement

Tables 5.5.2.8.5-1 and 5.5.2.8.5-2 define the primary level settings including test tolerances for EN-DC FR2 interruptions at E-UTRA SRS carrier based switching in asynchronous EN-DC.

Table 5.5.2.8.5-1: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at NR SRS carrier based switching

Parameter		**Unit**	**Cell 2**	**Cell 3**
Frequency Range			FR2	
Duplex mode	Config 1,2		TDD	
TDD configuration	Config 1,2		[TDDConf.3.2]	
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66	

Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
TRS configuration	Config 1,2		TRS.2.1 TDD
SRS configuration	Config 1,2		SRS.6 TDD
TCI state	Config 1,2		TCI.State.0
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$		dB	17
Propagation Condition			AWGN
Time offset to cell1 Note 2		µs	33
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells			

Table 5.5.2.8.5-2: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions at NR SRS carrier based switching

Parameter	Unit	Test 1	
		Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.9.1	
Assumption for UE beams Note 6		Fine	
N_{oc} Note1	dBm/15kHz Note4	-112	
N_{oc} Note1	dBm/SCS Note3	-103	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRP Note2	dBm/SCS Note4	-99	
$\hat{E}_s / I_{ot}$	dB	4	
Io Note2	dBm/95.04 MHz Note4	-68.5	

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

In T2 UE shall transmit SRS on Cell3 as requested. During T2 interruption on Cell2 due to SRS carrier based switching from Cell2 to Cell3 shall not exceed the requirements defined in TS38.133 clause 8.2.1.2.12.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

5.5.3 SCell activation and deactivation delay

5.5.3.0 Minimum conformance requirements

5.5.3.0.1 Minimum conformance requirements for SCell activation delay for deactivated SCell

[TS38.133, Clause 8.3.2]

The requirements in this clause shall apply for the UE configured with at least one downlink SCell in EN-DC, or in standalone NR carrier aggregation or in NE-DC or in NR-DC and when one SCell is being activated.

The delay within which the UE shall be able to activate the deactivated SCell depends upon the specified conditions.

Upon receiving SCell activation command in slot *n*, the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot $n + \frac{T_{HARQ}+T_{activation_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where:

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [8]

$T_{activation_time}$ is the SCell activation delay in millisecond.

If the SCell is known and belongs to FR1, $T_{activation_time}$ is:

- $T_{FirstSSB}$+ 5ms, if the measurement period of the SCell being activated is equal to or smaller than 2400ms.
- $T_{FirstSSB_MAX}$ + T_{rs} + 5ms, if the measurement period of the SCell being activated is larger than 2400ms.

If the SCell is unknown and belongs to FR1, and if one of the following conditions is met

- 'ssb-PositionInBurst' indicates only one SSB is being actually transmitted, or
- 'ssb-PositionInBurst' indicates multiple SSBs and TCI indication is provided in same MAC PDU with SCell activation,

provided that the side condition $\hat{E}s/Iot \geq$ -2dB is fulfilled, $T_{activation_time}$ is:

- $T_{FirstSSB_MAX,\ enhanced}$ + $T_{SMTC_MAX,\ enhanced}$ + $T_{rs,\ enhanced}$ + 5ms, if the following conditions are met,
  - the SCell is contiguous to an active serving cell in the same band, and
    - its *ssb-PositionInBurst* is same as the one of contiguous FR1 active serving cell, and
    - its SMTC offset is same as the one of contiguous FR1 active serving cell, and

- its RTD with contiguous FR1 active serving cell is smaller than or equal to 260ns with respect to the to-be-activated SCell's SSB numerology, and its reception power difference with contiguous FR1 active serving cell is smaller than or equal to 6dB;

- $T_{FirstSSB_MAX, enhanced} + T_{SMTC_MAX, enhanced} + 2*T_{rs, enhanced}$ + 5ms, otherwise.

- Otherwise

- $T_{FirstSSB_MAX} + T_{SMTC_MAX} + T_{rs}$ + 5ms, if the following conditions are met,

  - the SCell is contiguous to an active serving cell in the same band, and

  - its *ssb-PositionInBurst* is same as the one of contiguous FR1 active serving cell, and

  - its SMTC offset is same as the one of contiguous FR1 active serving cell, and

  - its RTD with contiguous FR1 active serving cell is smaller than or equal to 260ns, and its reception power difference with contiguous FR1 active serving cell is smaller than or equal to 6dB;

- $T_{FirstSSB_MAX} + T_{SMTC_MAX} + 2*T_{rs}$ + 5ms, otherwise.

otherwise, provided that the side condition $\hat{E}s/Iot \geq$ -2dB is fulfilled, $T_{activation_time}$ is:

- If UE supports *shortMeasInterval-r18*, then

  - 6ms + $T_{FirstSSB_MAX, enhanced} + T_{SMTC_MAX, enhanced} + T_{rs, enhanced} + T_{L1\text{-}RSRP, enhanced_measure} + T_{L1\text{-}RSRP, report} + T_{HARQ}$ + max($T_{uncertainty_MAC} + T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$), if semi-persistent CSI-RS is used for CSI reporting,

  - 3ms + $T_{FirstSSB_MAX, enhanced} + T_{SMTC_MAX, enhanced} + T_{rs, enhanced} + T_{L1\text{-}RSRP, enhanced_measure} + T_{L1\text{-}RSRP ,report}$ + max($T_{HARQ} + T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC} + T_{RRC_delay}$), if periodic CSI-RS is used for CSI reporting.

- Otherwise

  - 6ms + $T_{FirstSSB_MAX} + T_{SMTC_MAX} + T_{rs} + T_{L1\text{-}RSRP, measure} + T_{L1\text{-}RSRP,report} + T_{HARQ}$ + max($T_{uncertainty_MAC}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$), if semi-persistent CSI-RS is used for CSI reporting,

  - 3ms + $T_{FirstSSB_MAX} + T_{SMTC_MAX} + T_{rs} + T_{L1\text{-}RSRP, measure} + T_{L1\text{-}RSRP,report}$ + max($T_{HARQ} + T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC} + T_{RRC_delay}$), if periodic CSI-RS is used for CSI reporting.

- However, when the following conditions are fulfilled, no activation requirement will be applied for this unknown SCell:

  - the SCell is contiguous to an active serving cell in the same band, and

  - A single SSB is used in the unknown SCell; or multiple SSBs are used in the SCell and TCI state indication for PDCCH is provided by the same MAC PDU used for SCell activation; and

  - its *ssb-PositionInBurst* is same as the one of contiguous FR1 active serving cell, and

  - its SMTC offset is same as the one of contiguous FR1 active serving cell

  - its RTD with contiguous FR1 active serving cell is larger than 260ns, or its reception power difference with contiguous FR1 active serving cell is larger than 6dB;

If the SCell being activated belongs to FR1 and if there is at least one active serving cell contiguous to the SCell on that FR1 band, if the UE is not provided with SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration for the target SCell, $T_{activation_time}$ is 3 ms for UE supporting *scellWithoutSSB*, provided

- The RTD between the target SCell and the contiguous active serving cell is within ±260ns, and

- The difference of the reception power with the contiguous active serving cell is <= 6dB, and

- The RS(s) of SCell being activated is (are) QCL-TypeA with TRS(s) of the SCell being activated, and the TRS(s) of the SCell being activated is (are) further QCL-TypeC with SSB(s) of any active serving cell that is contiguous to the SCell being activated on that FR1 band.

For a UE supporting [*scellWithoutSSB-interband*], if the SCell being activated belongs to FR1 and if the UE is not provided with SSB configuration (*absoluteFrequencySSB*) in the target SCell (FrequencyInfoDL) nor SMTC configuration for the target SCell, and if there is one collocated active reference serving cell on different FR1 band, when the following conditions are fulfilled,

- The RTD between the target SCell and the collocated reference serving cell is within CP where CP is corresponding to the SCS of SSB-less SCell, and
- The [EPRE] difference at the UE is smaller than or equal to [9] dB, where, [EPRE] difference is the power difference between TRS/A-TRS symbol on the SSB-less SCell and SSB symbol on the reference serving cell [after the compensation for AGC], and
- The RS(s) of the SSB-less SCell being activated is (are) QCL-TypeA with TRS(s) of the SSB-less SCell being activated, and the TRS(s) of the SSB-less SCell being activated is (are) further QCL-TypeC with SSB(s) of an inter-band active serving cell, and the inter-band active serving cell shall be same as the reference serving cell.

where the reference serving cell can be indicated by higherlayer parameter [*SSB-less-Referencecell*]. If UE is not indicated with [*SSB-less-Referencecell*], the reference serving cell is assumed to be the QCL-typeC source cell if there is only one active QCL-typeC source cell configured.

Editor notes: FFS whether and how to capture if there are more than one QCL source cell.

Editor notes: FFS whether and how to capture the wording "after the compensation for AGC".

$T_{activation_time}$ is

- $T_{first_TRS} + T_{TRS}$ +5 ms, [if aperiodic CSI-RS resources are not configured for SCell activation or UE do not support [*ATRS based SSB-less operation*]]
- $T_{first_ATRS} + T_{gap} + T_{ATRS}$ + 5 ms [if aperiodic CSI-RS resources are configured for Scell activation for UE supporting [*ATRS based SSB-less operation*]]

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, then $T_{activation_time}$ is $T_{FirstSSB}$+ 5ms provided:

- The UE is provided with SMTC for the target SCell, and
- The SSBs in the serving cell(s) and the SSBs in the SCell fulfil the condition defined in clause 3.6.3 in TS 38.133 [6], and
- The parameter ssb-PositionsInBurst is same for the serving cell(s) and the Scell, and
- SSB is in the same half-frame on the SCell and the contiguous FR2 active serving cell.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, if the UE supporting *scellWithoutSSB* is not provided with any SMTC for the target SCell, $T_{activation_time}$ is 3 ms, provided

- the RS (s) of SCell being activated is (are) QCL-TypeD with RS (s) of one active serving cell on that FR2 band.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, if the FR2 power class 6 UE supporting *scellWithoutSSB* and [*Enhanced FR2 HST RRM requirements for intra-band CA and inter-frequency measurements in connected mode*] is configured with *highSpeedMeasFlagFR2-r17*, $T_{activation_time}$ is 3 ms , provided

- the RS (s) of SCell being activated is (are) QCL-TypeD with RS (s) of one active serving cell on that FR2 band.

If the SCell being activated belongs to FR2 and if there is no active serving cell on that FR2 band provided that PCell or PSCell is in FR1 or in FR2:

If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:

- 3ms + max($T_{uncertainty_MAC}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$), where $T_{uncertainty_MAC}$=0 and $T_{uncertainty_SP}$=0 if UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation command at the same time.

If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:

- max($T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC}$ + T_{RRC_delay}-T_{HARQ}), where $T_{uncertainty_MAC}$=0 if UE receives the SCell activation command and TCI state activation commands at the same time.

If the PCell/PSCell and the target SCell are configured as FR1-FR2-1 CA or if the PCell/PSCell and the target SCell are in a FR2-1 band pair with independent beam management, and the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition Ês/Iot ≥ -2dB is fulfilled, then $T_{activation_time}$ is:

- 6ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + T_{HARQ} + max($T_{uncertainty_MAC}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$), or

- 6ms + $T_{FirstSSB_MAX,enhanced}$ + 15*$T_{SMTC_MAX,\ enhanced}$ + X1*$T_{rs,\ enhanced}$ + $T_{L1\text{-}RSRP,\ enhanced_measure}$ + $T_{L1\text{-}RSRP,\ report}$ + T_{HARQ} + max($T_{uncertainty_MAC}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$) if UE supports [*LowerRxBeamSweepingFactorForCellSearch-FR2*] and/or [*LowerRxBeamSweepingFactorForL1-RSRPmeasurement-FR2*] and/or *shortMeasInterval-r18* capabilities, and when SCell activation triggered L3 report is not configured or SCell activation triggered L3 report is configured but not triggered.

If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition Ês/Iot ≥ -2dB is fulfilled, then $T_{activation_time}$ is:

- 6ms + $T_{FirstSSB_MAX}$ + 23*T_{SMTC_MAX} + 12*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + T_{HARQ} + max($T_{uncertainty_MAC}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$).

If the PCell/PSCell and the target SCell are configured as FR1-FR2-1 CA or if the PCell/PSCell and the target SCell are in a FR2-1 band pair with independent beam management, and the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition Ês/Iot ≥ -2dB is fulfilled, then $T_{activation_time}$ is:

- 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}, or

- 3ms + $T_{FirstSSB_MAX,\ enhanced}$ + 15*$T_{SMTC_MAX,\ enhanced}$ + X1*$T_{rs,\ enhanced}$ + $T_{L1\text{-}RSRP,\ enhanced_measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})} if UE supports [*LowerRxBeamSweepingFactorForCellSearch-FR2*] and/or [*LowerRxBeamSweepingFactorForL1-RSRPmeasurement-FR2*] and/or *shortMeasInterval-r18* capabilities, and when SCell activation triggered L3 report is not configured or SCell activation triggered L3 report is configured but not triggered.

If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition Ês/Iot ≥ -2dB is fulfilled, then $T_{activation_time}$ is:

- 3ms + $T_{FirstSSB_MAX}$ + 23*T_{SMTC_MAX} + 12*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}.

where,

T_{SMTC_MAX}:

- In FR1, in case of intra-band contiguous SCell activation or in case of intra-band non-contiguous SCell activation for UE not capable of *intraBandNR-CA-non-collocated-r18* or UE is capable of *intraBandNR-CA-non-collocated-r18* and *nonCollocatedTypeNR-CA-r18* is provided, T_{SMTC_MAX} is the longer SMTC periodicity between active serving cells and SCell being activated provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot; in case of intra-band non-contiguous SCell activation for UE capable of *intraBandNR-CA-non-collocated-r18* and *nonCollocatedTypeNR-CA-r18* is not provided or in case of inter-band SCell

activation, T_{SMTC_MAX} is the SMTC periodicity of SCell being activated. T_{SMTC_MAX} is the SMTC periodicity of SCell being activated.

- In FR2, in case of intra-band SCell activation, T_{SMTC_MAX} is the longer SMTC periodicity between active serving cells and SCell being activated provided that in Rel-15 only support FR2 intra-band CA; in case of FR2 inter-band SCell activation, T_{SMTC_MAX} is the SMTC periodicity of SCell being activated.

- T_{SMTC_MAX} is bounded to a minimum value of 10ms.

$T_{SMTC_MAX, enhanced}$:

- In FR1 or FR2-1, a UE supporting *shortMeasInterval-r18* if the SMTC for SCell being activated is only configured in measObjectNR, $T_{SMTC_MAX, enhanced}$ is the SSB periodicity of SCell being activated. Otherwise, $T_{SMTC_MAX, enhanced} = T_{SMTC_MAX}$.

T_{rs} is the SMTC periodicity of the SCell being activated if the UE has been provided with an SMTC configuration for the SCell in SCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement which involves T_{rs} is applied with T_{rs} = 5ms assuming the SSB transmission periodicity is 5ms. There are no requirements if the SSB transmission periodicity is not 5ms.

$T_{rs, enhanced}$ is the SSB periodicity of the SCell being activated for a UE supporting *shortMeasInterval-r18* in FR1 or FR2-1, if the SMTC for SCell being activated is only configured in the *measObjectNR*. Otherwise, $T_{rs, enhanced} = T_{rs}$

$T_{FirstSSB}$: is the time to the end of the first complete SSB burst indicated by the SMTC, or within 5ms if SMTC is not configured, after slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

$T_{FirstSSB_MAX}$: Is the time to the end of the first complete SSB burst indicated by the SMTC, or within 5ms if SMTC is not configured, after slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, further fulfilling:

- In FR1, in case of intra-band contiguous SCell activation or in case of intra-band non-contiguous SCell activation for UE not capable of *intraBandNR-CA-non-collocated-r18*, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of intra-band non-contiguous SCell activation for UE capable of *intraBandNR-CA-non-collocated-r18* or in case of inter-band SCell activation, the first occasion when the SCell being activated is transmitting SSB burst.

- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

$T_{FirstSSB_MAX, enhanced}$: For a UE supporting *shortMeasInterval-r18* in FR1 or FR2-1, if the SMTC for SCell being activated is only configured in the measObjectNR, $T_{FirstSSB_MAX, enhanced}$ is the time to the end of the first complete SSB burst indicated by the SSB periodicity of the SCell being activated, after slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$. Otherwise, $T_{FirstSSB_MAX, enhanced} = T_{FirstSSB_MAX}$

$T_{FineTiming}$ is the time period between UE finish processing the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and the timing of first complete available SSB corresponding to the TCI state.

X1 is equal to the reported value in [*LowerRxBeamSweepingFactorForCellSearch-FR2*] in FR2. Otherwise, if [*LowerRxBeamSweepingFactorForCellSearch-FR2*] is absent, X1 is 8.

$T_{L1\text{-}RSRP, measure}$ is L1-RSRP measurement delay $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ ms or $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ based on applicability as defined in clause 9.5 in TS 38.133 [6] assuming M=1 and T_{Report}=0.

$T_{L1\text{-}RSRP, enhanced_measure}$ is

- SSB based L1-RSRP measurement delay $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ ms based on applicability as defined in clause 9.5 in TS 38.133 [6] assuming M=1 and T_{Report}=0; N is equal to the value reported by the UE in

[*LowerRxBeamSweepingFactorForL1-RSRPmeasurement-FR2]*. Otherwise, if [*LowerRxBeamSweepingFactorForL1-RSRPmeasurement-FR2]* is absent, N= 8. Or,

- CSI-RS based L1-RSRP measurement delay $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ ms based on applicability as defined in clause 9.5 in TS 38.133 [6] assuming M=1 and T_{Report}=0.

- If UE supports *shortMeasInterval-r18* capability, L1-RSRP measurement for $T_{L1\text{-}RSRP,\ enhanced_measure}$ can be performed based on non-DRX mode even if DRX is configured.

  $T_{L1\text{-}RSRP,\ report}$ is delay of acquiring CSI reporting resources.

  $T_{uncertainty_MAC}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable) relative to

  - SCell activation command for known case;

  - First valid L1-RSRP reporting for unknown case.

  $T_{uncertainty_RRC}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) relative to

  - SCell activation command for known case;

  - First valid L1-RSRP reporting for unknown case.

  $T_{uncertainty_SP}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting relative to

  - SCell activation command for known case;

  - First valid L1-RSRP reporting for unknown case.

  T_{RRC_delay} is the RRC procedure delay as specified in TS38.331 [13].

  Longer delays for RRM measurement requirements, and in case of FR2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

  When *absoluteFrequencySSB* is not configured in *DownlinkConfigCommon* for target SCell but SMTC for target SCell is configured, no requirement would be applied.

$T_{CSI_reporting}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13].

$T_{FirstTRS}$: is the time to the end of the first complete periodic CSI-RS burst for SCell activation after slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

T_{TRS} is the periodicity of periodic CSI-RS burst for SCell activation.

$T_{FirstATRS}$: is the time to the end of the first complete CSI-RS burst for SCell activation after slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots.

T_{ATRS} is the CSI-RS burst for SCell activation where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots.

T_{gap} is a gap length between two aperiodic CSI-RS bursts,

- at least 2 slots for 15kHz and 30kHz

- at least 3 slots for 60kHz

SCell in FR1 is known if it has been meeting the following conditions:

- During the period equal to max(5*measCycleSCell, 5*DRX cycles) for FR1 before the reception of the SCell activation command:

- the UE has sent a valid measurement report for the SCell being activated and
- the SSB measured remains detectable according to the cell identification conditions specified in clause 9.2 and 9.3 in TS 38.133 [6].

- the SSB measured during the period equal to max(5*measCycleSCell, 5*DRX cycles) also remains detectable during the SCell activation delay according to the cell identification conditions specified in clause 9.2 and 9.3 in TS 38.133 [6].

Otherwise SCell in FR1 is unknown.

For the first SCell activation in FR2 bands, the SCell is known if it has been meeting the following conditions:

- During the period equal to 4s for UE supporting power class 1/5 and 3s for UE supporting power class 2/3/4 before UE receives the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable):
  - the UE has sent a valid L3-RSRP measurement report with SSB index, and
  - SCell activation command is received after L3-RSRP reporting and no later than the time when UE receives MAC-CE command for TCI activation
- During the period from L3-RSRP reporting to the valid CQI reporting, the reported SSBs with indexes remain detectable according to the cell identification conditions specified in clauses 9.2 and 9.3 in TS 38.133 [6], and the TCI state is selected based on one of the latest reported SSB indexes.

Otherwise, the first SCell in FR2 band is unknown. The requirement for unknown SCell applies provided that the activation commands for PDCCH TCI, PDSCH TCI (when applicable), semi-persistent CSI-RS for CQI reporting (when applicable), and configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) are based on the latest valid L1-RSRP reporting.

If the UE has been provided with higher layer in TS 38.331 [13] signalling of *smtc2* prior to the activation command, T_{SMTC_Scell} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. T_{SMTC_MAX} follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.331 [13] for a SCell at the first opportunities for the corresponding actions once the SCell is activated.

The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2 in TS 38.133 [6], shall not occur before slot $n+1+\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot slot $n+1+\frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being activated, and T_X is:

- 0, if $T_{activation_time}$ is 3ms;
- $T_{FirstSSB}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB}$;
- $T_{FirstSSB_MAX}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB_MAX}$;
- $T_{uncertainty_MAC} + T_{FineTiming}$, for any scenario where $T_{activation_time}$ includes only $T_{FineTiming}$ and no $T_{FirstSSB_MAX;}$
- [T_{first_TRS}, for FR1 inter-band SSB-less SCell activation scenario where $T_{activation_time}$ includes T_{first_TRS}];
- [T_{first_ATRS}, for FR1 inter-band SSB-less SCell activation scenario where $T_{activation_time}$ includes T_{first_ATRS}].

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

The requirements in this clause and requriements on interruption due to SCell activation in clause 8.2 in TS 38.133 [6] apply provided that the SSB of the to-be-activated SCell is within the first active DL BWP of the Scell.

Starting from the slot specified in clause 4.3 of TS 38.213 [8] (timing for secondary Cell activation/deactivation) and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [8] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

5.5.3.0.2 Minimum conformance requirements for SCell deactivation delay for activated SCell

[TS38.133, Clause 8.3.3]

The requirements in this clause shall apply for the UE configured with at least one downlink SCell in EN-DC, or in standalone NR carrier aggregation or in NE-DC or in NR-DC and when one SCell is being deactivated.

Upon receiving SCell deactivation command in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n + \frac{T_{HARQ}+3ms}{NR\,slot\,length}$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2 in TS 38.133 [6], shall not occur before slot $n+1+\frac{T_{HARQ}}{NR\,slot\,length}$ and not occur after slot $n+1+\frac{T_{HARQ}+3ms}{NR\,slot\,length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.

Upon expiry of the *sCellDeactivationTimer* in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n + \frac{3ms}{NR\,slot\,length}$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2 in TS 38.133 [6], shall not occur before slot n+1 and not occur after slot $n+1+\frac{3ms}{NR\,slot\,length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

5.5.3.0.3 Minimum conformance requirements for SCell activation delay for deactivated SCell with multiple downlink SCells

[TS38.133, Clause 8.3.7]

The requirements in this clause shall apply for the UE configured with more than one downlink SCells.

In EN-DC, NE-DC, standalone NR carrier aggregation, or in one CG of NR-DC, the requirements in this clause shall apply when the following conditions are met:

- UE only receives one single MAC command for multiple SCell activation within the activation period defined in this clause
- in each single CG, there are no other SCell activation, deactivation, addition or release before activation is completed for all the SCells activated by the single MAC CE in this clause, and
- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before multiple SCell activation is completed in this clause, and
- any to-be-activated unknown SCell has active serving cell(s) or known to-be-activated SCell(s) on the same band

In two CGs of NR-DC, the requirements in this clause shall apply when the following conditions are met:

- UE receives one MAC command per CG for multiple SCell activation within the activation period defined in this clause, and
- UE supports per-FR measurement gap capability, and
- any to-be-activated unknown SCell has active serving cell(s) or known to-be-activated SCell(s) on the same band

The delay within which the UE shall be able to activate the deactivated SCell with other downlink to-be-activated SCell(s) depends upon the specified conditions.

Upon receiving SCell activation command in slot *n* for more than one SCell, for each of the to-be-activated SCell, the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot $n + \frac{T_{HARQ}+T_{activation_time_multiple_scells}+T_{CSI_Reporting}}{NR\ slot\ length}$, where:

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [8]

$T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario.

If the SCell is known and belongs to FR1 and the measurement period of the SCell being activated is equal to or smaller than [2400ms], $T_{activation_time_multiple_scells}$ is:

- $T_{FirstSSB_MAX_multiple_scells} + T_{rs}$ + 5ms, if on the same band UE also has at least one parallel to-be-activated SCell which is FR1 known Scell with the measurement period larger than [2400ms] but does not have any parallel to-be-activated SCell which is FR1 unknown SCell.
- $T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs}$ + 5ms, if on the same band UE also has at least one parallel to-be-activated SCell which is FR1 unknown Scell
- otherwise, $T_{FirstSSB_MAX_multiple_scells}$ + 5ms.

If the SCell is known and belongs to FR1 and the measurement period of the SCell being activated is larger than [2400ms], $T_{activation_time_multiple_scells}$ is:

- $T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs}$ + 5ms, if on the same band UE also has at least one parallel to-be-activated SCell which is FR1 unknown Scell
- otherwise, $T_{FirstSSB_MAX_multiple_scells} + T_{rs}$ + 5ms

If the SCell is unknown and belongs to FR1, provided that the side condition $\hat{E}s/Iot \geq$ -2dB is fulfilled, $T_{activation_time_multiple_scells}$ is:

- $T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs}$ +5ms, if the SCell is not counted in N_1
  - The activation delay may be longer if SSB is not in the same half-frame on the SCell and the contiguous FR1 known cell or contiguous FR1 active serving cell

otherwise

- if the following conditions are met
  - 'ssb-PositionInBurst' indicates only one SSB is being actually transmitted, or
  - 'ssb-PositionInBurst' indicates multiple SSBs and TCI indication is provided in same MAC PDU with SCell activation,
- $T_{activation_time_multiple_scells}$ is:
  - $T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs} * N_1 + T_{rs}$ +5ms,
- Otherwise:

  $T_{activation_time_multiple_scells}$ is:
  - 6ms + $T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs} * N_1 + T_{L1\text{-}RSRP,measure} + T_{L1\text{-}RSRP,report} + T_{HARQ}$ + max($T_{uncertainty_MAC_multiple_scells} + T_{FineTiming}$ + 2ms, $T_{uncertainty_SP_multiple_scells}$), if semi-persistent CSI-RS is used for CSI reporting,
  - 3ms + $T_{FirstSSB_MAX_multiple_scells} + T_{SMTC_MAX_multiple_scells} + T_{rs} * N_1 + T_{L1\text{-}RSRP,measure} + T_{L1\text{-}RSRP,report}$ + max($T_{HARQ} + T_{uncertainty_MAC_multiple_scells}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC_multiple_scells} + T_{RRC_delay}$), if periodic CSI-RS is used for CSI reporting.

If the SCell being activated belongs to FR1 and if there is at least one active serving cell contiguous to the SCell on that FR1 band, if the UE is not provided with SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration for the target SCell, $T_{activation_time_multiple_scells}$ is same as single SCell activation delay requirement as defined in clause 8.3.2 in TS 38.133 [6].

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, then $T_{activation_time_multiple_scells}$ is same as single SCell activation delay requirement as defined in clause 8.3.2 in TS 38.133 [6].

If the SCell being activated belongs to FR2 and if there is no active serving cell on that FR2 band provided that PCell or PSCell is FR1:

If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{activation_time_multiple_scells}$ is same as single SCell activation delay requirement as defined in clause 8.3.2 in TS 38.133 [6].

If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{activation_time_multiple_scells}$ is same as single SCell activation delay requirement as defined in clause 8.3.2 in TS 38.133 [6].

If the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, then $T_{activation_time_multiple_scells}$ is:

- 3 ms + max($T_{uncertainty_MAC_multiple_scells}$ +$T_{FineTiming}$ + 2ms, $T_{uncertainty_SP_multiple_scells}$), if on the same band UE also has at least one parallel to-be-activated SCell which is FR2 known Scell. $T_{uncertainty_MAC_multiple_scells}$ =0 and $T_{uncertainty_SP_multiple_scells}$ =0 if UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation commands at the same time.

If the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, then $T_{activation_time_multiple_scells}$ is:

- max($T_{uncertainty_MAC_multiple_scells}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC_multiple_scells}$ + T_{RRC_delay}-T_{HARQ}), if on the same band UE also has at least one parallel to-be-activated SCell which is FR2 known Scell . $T_{uncertainty_MAC_multiple_scells}$ =0 if UE receives the SCell activation command and TCI state activation commands at the same time.

The requirements for FR2 unknown SCells apply provided that the parameter *ssb-PositionsInBurst* is same for the SCell and the known serving cell on the same FR2 band. The activation delay FR2 unknown SCell may be longer if SSB is not in the same half-frame on the SCell and the contiguous FR2 known cell.

Where,

N_1 is the number counting for parallel FR1 unknown to-be-activated SCell(s) only except the ones which fulfilled the following conditions:

- contiguous to an active serving cell in the same band, or to a known SCell in the same band being activated by the same MAC PDU, and
- A single SSB is used in the unknown SCell; or multiple SSBs are used in the unknown SCell and TCI state indication for PDCCH is provided by the same MAC PDU used for SCell activation; and
- its *ssb-PositionInBurst* is same as the one of contiguous FR1 known cell or contiguous FR1 active serving cell, and
- its RTD with contiguous FR1 known cell or contiguous FR1 active serving cell is smaller than or equal to 260ns and its reception power difference with contiguous FR1 known cell or contiguous FR1 active serving cell is smaller than or equal to 6dB, and
- its SMTC offset is same as the one of contiguous FR1 known cell or contiguous FR1 active serving cell

However, when the following conditions are fulfilled, no activation requirement will be applied for this unknown SCell and other SCells being activated and counted in N_1:

- contiguous to an active serving cell in the same band, or to a known SCell in the same band being activated by the same MAC PDU, and
- A single SSB is used in the unknown SCell; or multiple SSBs are used in the unknown SCell and TCI state indication for PDCCH is provided by the same MAC PDU used for SCell activation; and
- its *ssb-PositionInBurst* is same as the one of FR1 known cell or FR1 active serving cell, and

- its RTD with contiguous FR1 known cell or contiguous FR1 active serving cell is larger than 260ns or its reception power difference with contiguous FR1 known cell or contiguous FR1 active serving cell is larger than 6dB, and
- its SMTC offset is same as the one of FR1 known cell or FR1 active serving cell

$T_{SMTC_MAX_multiple_scells}$:

- In FR1, in case of intra-band SCell activation, $T_{SMTC_MAX_multiple_scells}$ is the longest SMTC periodicity between active serving cells and SCells being activated on the same band provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot; in case of inter-band SCell activation, $T_{SMTC_MAX_multiple_scells}$ is the longest SMTC periodicity of SCells being activated on the same band.
- In FR2, $T_{SMTC_MAX_multiple_scells}$ is the longest SMTC periodicity between active serving cells and SCell(s) being activated in FR2 intra-band CA.
- $T_{SMTC_MAX_multiple_scells}$ is bounded to a minimum value of 10ms.

$T_{FirstSSB_MAX_multiple_scells}$: is the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, further fulfilling:

- In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCells being activated are transmitting SSB burst.
- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

$T_{uncertainty_MAC_multiple_scells}$ is the time period between reception of the activation command for PDCCH TCI, PDSCH TCI (when applicable) and SCell activation command of this unknown SCell.

$T_{uncertainty_SP_multiple_scells}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting and SCell activation command of this unknown SCell.

$T_{uncertainty_RRC_multiple_scells}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) and SCell activation command of this unknown SCell.

T_{rs}, $T_{FineTiming}$, and T_{RRC_delay} is defined in clause 8.3.2 in TS 38.133 [6].

Longer delays for RRM measurement requirements, and in case of FR2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

The condition of known SCell in FR1 or FR2 is defined in clause 8.3.2 in TS 38.133 [6].

If the UE has been provided with higher layer in TS 38.331 [13] signaling of *smtc2* prior to the activation command, T_{SMTC_Scell} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. $T_{SMTC_MAX_multiple_scell}$ follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

The starting point and the end-point of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode is same as single SCell activation requirement in clause 8.3.2 in TS 38.133 [6].

Starting from the slot specified in clause 4.3 of TS 38.213 [8] (timing for secondary Cell activation/deactivation) and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Upon receiving SCell activation command in slot *n*, if the start of the first complete SSB used in the T_X in the different bands which have SCells being activated after $n+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$ are not aligned on time domain among

- SCells in different bands being activated by the same MAC CE if UE does not support per FR gap, or
- SCells in different FR1 bands being activated by the same MAC CE if UE supports per FR gap,

additional interruptions may be expected for the activated serving cells, where

- The number of additional interruptions is no more than the number of FR1 bands which have both SCell being activated for which the activation requirements involve $T_{FirstSSB_MAX\ multiple_scells}$ with T_{rs} and the active serving cell, and
- In each interruption occasion, the interruption length is defined in clause 8.2.2.2.2 in TS 38.133 [6], and
- Longer activation delay may be expected for multiple SCell activation under one MAC CE with multiple interruptions, and
- T_X is:
  - $T_{FirstSSB}$, for any scenario where $T_{activation_time\ multiple_scells}$ includes $T_{FirstSSB}$;
  - $T_{FirstSSB_MAX\ multiple_scells}$, for any scenario where $T_{activation_time\ multiple_scells}$ includes $T_{FirstSSB_MAX\ multiple_scells}$;
  - $T_{uncertainty_MAC}+T_{FineTiming}$ or $T_{uncertainty_MAC\ multiple_scells}+T_{FineTiming}$, for any scenario where $T_{activation_time\ multiple_scells}$ includes $T_{FineTiming}$.

Otherwise, no additional interruption is expected due to activation of multiple SCells.

Starting from slot $n + T_{HARQ} + 3$ ms where slot n is the slot where SCell activation command is received (as specified in clause 4.3 of TS 38.213 [8]) and until the SCell activation completion at UE, after at least one CSI-RS transmission occasion for the channel measurement and reporting (specified in clause 5.2.2.5 of TS 38.214 [9]), the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [8] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

5.5.3.0.4 Minimum conformance requirements for SCell deactivation delay for activated SCell with multiple downlink SCells

[TS38.133, Clause 8.3.8]

The requirements in this clause shall apply for the UE configured with multiple downlink SCells in EN-DC, or in standalone NR carrier aggregation, or in NE-DC, or in NR-DC, provided that,

- in each single CG, there are no other SCell activation, deactivation, addition or release before deactivation is completed for all the SCells deactivated by the single MAC CE in this clause, and
- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before multiple SCell deactivation is completed in this clause, and
- in EN-DC, NE-DC, NR-DC and standalone NR, UE only receives one single MAC command for multiple SCell deactivation within the deactivation period defined in this clause, or, in NR-DC, per-FR measurement gap capable UE receives one MAC command per CG for multiple SCell deactivation within the deactivation period defined in this clause

Upon receiving SCell deactivation command in slot n, the UE shall accomplish the deactivation actions for the SCell being deactivated within the same delay as specified in clause 8.3.3 in TS 38.133 [6].

The starting point and the end-point of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode is same as single SCell activation requirement in clause 8.3.3 in TS 38.133 [6].

5.5.3.1 EN-DC FR2 SCell activation and deactivation intra-band in non-DRX

Editor's Note: This test case has been completed for the following configurations: (?)

- *Test frequency f ≤ 40.8 GHz*
- *UE PC3*

- *The test is incomplete for UE power classes other than PC3*
- *The test is incomplete for test frequencies > 40.8 GHz*

5.5.3.1.1 Test purpose

This test is to verify that the SCell activation and deactivation times are within the requirements, when the SCell in FR2 intra-band is known by the UE at the time of activation.

5.5.3.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards and supporting 2DL CA.

5.5.3.1.3 Minimum conformance requirements

Same minimum conformance requirements as described in clause 4.5.3.1.3.

The normative reference for this requirement is TS 38.133 [6] clause 8.3 and A.5.5.3.1.

5.5.3.1.4 Test description

5.5.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.3.1.4.1-1.

Table 5.5.3.1.4.1-1: Supported test configurations for FR2 SCell activation case with FR2 PSCell

Test Case ID	Description
5.5.3.1-1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.3.1-2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 5.5.3.1.4.1-2 and Table 5.5.3.1.4.1-3.

Table 5.5.3.1.4.1-2: Initial conditions for known FR2 SCell activation case with FR2 PSCell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 5.5.3.1.4.1-3: General test parameters for FR2 SCell activation case with FR2 PSCell

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2 of TS38.133 [6]
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.

Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell3 timing offset to cell2	µs	0	
Time alignment error between cell3 and cell2	µs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1*NR slot length	k1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by dl-DataToUL-ACK, the value of k should be the minimum value defined in TS 38.213 [8]
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in 38.331 [13].
k	ms	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS38.213 [8]

1. Message contents are defined in clause 5.5.3.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR2 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the deactivated SCell.
3. Downlink signals for NR cell are initially set up according to clause C.2.1.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.5.3.1.4.2 Test procedure

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot m + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell or PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where

m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m, and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [23] section 7.32.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$. The starting point of any PSCell interruption due to the deactivation shall occur in the slot $n + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$. The starting point of any E-UTRA PCell interruption due to the deactivation shall occur in the subframe $n_1 + 1 + \frac{T_{HARQ}}{EUTRA\ subframe\ length}$ to subframe $n_2 + 1 + \frac{T_{HARQ}+3ms}{EUTRA\ subframe\ length}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters according to T1 in Tables 5.5.3.1.5-1 and A.6.1.2-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 5.5.3.1.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

3a. The UE send a *MeasurementReport* message embedded in *ULInformationTransferMRDC.*

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m and T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot $m + 1 + \frac{T_{HARQ}+3ms+T_(CSI_Reporting)}{NR\ slot\ length}$,

     - or slot $m + 1 + \frac{T_{HARQ}+3ms+T_(CSI_Reporting)+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot $m + 1 + \frac{T_{HARQ}+3ms+T_(CSI_Reporting)}{NR\ slot\ length}$ was subject to interruption,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $m + \frac{T_{HARQ}+T_{activation_time}+T_{CSI_Reporting}}{\text{NR slot length}}$,

     - or the next available uplink resource if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{T_{HARQ}+T_{activation_time}+T_{CSI_Reporting}}{\text{NR slot length}}$

   - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

   - Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 9.

7. When T2 expires, the SS deactivate SCC by sending the deactivation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n and T3 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 8, otherwise go to step 9.

8. The UE shall stop sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell during SCell deactivation.

   - If the last CSI report is received by the SS earlier than or equal to slot n + $\frac{\mathrm{T_{HARQ}}+3ms}{NR\ slot\ length}$

   - and DTX is not observed by the SS outside the slot n + 1 + $\frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T3,

   - Then the number of successes for the event "Deactivation" is increased by one. Otherwise, count a fail for the event "Deactivation".

9. When T3 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 6, or Deactivation in step 7 was not acknowledged, the SS shall transmit an *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508[25] Table 4.6.1-8 to release NR PSCell. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

10. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

11. The SS shall transmit an *RRCConnectionReconfiguration* message with condition MCG and SCG according to TS 36.508 [25] Table 4.6.1-8 to ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. The UE shall transmit an RRCConnectionReconfigurationComplete message.

12. Repeat steps 2-11 until a test verdict has been achieved.

Each of the events "Activation" and "Deactivation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.
If all events pass, the test passes. If one event fails, the test fails.

5.5.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3, with following exception:

Table 5.5.3.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-7 with Condition Deactivated SCell Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.5.3.1.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell	Table 5.5.3.1.4.3-5	
measConfig	MeasConfig	Table 5.5.3.1.4.3-2A	
}			
}			
}			

Table 5.5.3.1.4.3-2A: MeasConfig (Table 5.5.3.1.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 5.5.3.1.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 5.5.3.1.4.3-4	
}			
}			
}			
}			

Table 5.5.3.1.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 5.5.3.1.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 5.5.3.1.4.3-5: CellGroupConfig-SCell (Table 5.5.3.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
reconfigurationWithSync	Not present		

rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 5.5.3.1.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 5.5.3.1.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 5.5.3.1.4.3-6: ServingCellConfig-SpCell (Table 5.5.3.1.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 5.5.3.1.4.3-7: ServingCellConfig-SCell (Table 5.5.3.1.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

5.5.3.1.5 Test requirement

Table 5.5.3.1.5-1 will replace the values of corresponding parameters in Table 4.5.3.1.5-1 and Table 5.5.3.1.5-2 defines OTA related test parameters.

Table 5.5.3.1.5-1: Cell specific test parameters for FR2 SCell activation case with FR2 PSCell

Parameter[Note 5]	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
SSB ARFCN		freq1			freq2		
Duplex mode		TDD			TDD		
TDD configuration		TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
PDSCH Reference measurement channel		SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET Reference Channel		CR.3.1 TDD			CR.3.1 TDD		
RMC CORESET Reference Channel		CCR.3.1 TDD			CCR.3.1 TDD		
DL initial BWP configuration		DLBWP.0.1					
DL dedicated BWP configuration		DLBWP.1.1					
UL initial BWP configuration		ULBWP.0.1					
UL dedicated BWP configuration		ULBWP.1.1					
OCNG Patterns		OP.1					
SMTC configuration		SMTC.1					
SSB configuration		SSB.1 FR2					
TCI state		TCI.State.0					
TRS configuration		TRS.2.1 TDD					

CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD	
reportConfigType		periodic	N/A
reportQuantity		cri-RI-PMI-CQI	N/A
CSI reporting periodicity	slot	40	N/A
CSI reporting offset	slot	4	N/A
PDSCH/PDCCH subcarrier spacing	kHz	120	
TRS configuration		TRS.2.1 TDD	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS note 1			
EPRE ratio of OCNG to OCNG DMRS note 1			
Propagation conditions		AWGN	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: All parameters apply for configuration 1 and 2.

Table 5.5.3.1.5-2: OTA related test parameters for FR2 SCell activation case with FR2 PSCell

Parameter Note 6	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.9.1					
Assumption for UE beams Note 7		Rough			Rough		
N_{oc} Note1	dBm/15kHz Note4	-104.7			-104.7		
N_{oc} Note1	dBm/SCS Note3	-95.7			-95.7		
$\hat{E}_s / N_{oc}$	dB	7			7		
SS-RSRP Note2	dBm/SCS Note4	-88.7			-88.7		
$\hat{E}_s / I_{ot}$	dB	7			7		
Io Note2	dBm/95.04 MHz Note4	-58.92			-58.92		

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: Void
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 5: Void
NOTE 6: All parameters apply for configuration 1 and 2
NOTE 7: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

The test requirements defined in clause 4.5.3.1.5 shall apply to this test case, with the following exceptions:

- Placement of interruptions is only verified in NR PSCell.

5.5.3.2 to 5.5.3.5

5.5.3.6 Multiple SCell Activation and deactivation of one unknown SCell and one known SCell in FR2

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Test procedure and message contents need further work.

5.5.3.6.1 Test purpose

This test is to verify that the multiple SCell activation and deactivation delay and interruption are within the requirements, when the two SCells to be activated are in FR2 and one SCell is known and the other SCell is unknown by the UE at the time of activation.

5.5.3.6.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards and supporting 3DL CA.

5.5.3.6.3 Minimum conformance requirements

Same minimum conformance requirements as described in clause 5.5.3.0.

The normative reference for this requirement is TS 38.133 [6] clause 8.3 and A.5.5.3.6.

5.5.3.6.4 Test description

5.5.3.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.3.6.4.1-1.

Table 5.5.3.6.4.1-1: Supported test configurations

Test Case ID	Description
5.5.3.6-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.3.6-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.3.6.4.1-2 and Table 5.5.3.6.4.1-3.

Table 5.5.3.6.4.1-2: Initial conditions for a known FR2 SCell and an unknown FR2 SCell activation case with FR1 PSCell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.3.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 5.5.3.6.4.1-3: General test parameters for FR2 SCell activation case with FR1 PSCell

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3,4	One E-UTRAN radio channel (1) and three NR radio channels (2,3,4) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2 in TS 38.133 [6]
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2 in FR1.
Configured deactivated SCells		Cell 3, Cell 4	Configured deactivated secondary cell on NR RF channel number 3 and RF channel number 4, both in FR2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	ms	160	For both Cell 3 and Cell 4
T1	s	7	During this time the PSCell shall be known and the SCells configured, SCell1 detected but SCell2 not detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

1. Message contents are defined in clause 5.5.3.6.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR cell in FR1. Cell 3 and Cell 4 are NR FR2 cells in the same frequency. Cell 2 is the PSCell, and Cell 3 and Cell 4 are the deactivated SCells.
3. Downlink signals for NR cell are initially set up according to clause C.2.1.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.5.3.6.4.2 Test procedure

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are four carriers, one E-UTRA cell, and three NR cells. Before the test starts the UE is connected to Cell 1 (PCell) on the E-UTRA carrier and Cell 2 (PSCell) on the NR carrier in FR1, but is not aware of Cell 3 (SCell1) or Cell 4 (SCell2) on the NR carriers both in FR2. Cell 1, Cell 2 and Cell 3 have constant signal levels throughout the test. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the Cell 3 (SCell1) and Cell 4 (SCell2) are configured on NR. The test equipment sends a single MAC message for activation of both SCells within 3s for UE power class 2/3/4 or 4s for UE power class 1 after RRM reports is sent for SCell1.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m, defines the start of time period T2. In the same MAC PDU, the test equipment activates the TCI state of RMC CORESET. In slot #m, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell1 and SCell2.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters according to T1 in Tables 5.5.3.6.5-1 and A.6.1.2-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCells (Cell 3 and Cell 4) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 5.5.3.6.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

3a. The UE send a *MeasurementReport* message embedded in *ULInformationTransferMRDC.*

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m and T2 starts in slot m. In the same MAC PDU, the test equipment activates the TCI state of RMC CORESET. In slot #m, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell1 and SCell2. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot m + 1 + $\frac{\mathrm{T_{HARQ}+3ms+T_(CSI_Reporting)}}{NR\ slot\ length}$,

     - or slot $m + 1 + \frac{T_{HARQ}+3ms+T_(CSI_Reporting)+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot m + 1 + $\frac{\mathrm{T_{HARQ}+3ms+T_(CSI_Reporting)}}{NR\ slot\ length}$ was subject to interruption,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot m + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$,

     - or the next available uplink resource if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$

   - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

   - Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 9.

7. When T2 expires, the SS deactivate SCC by sending the deactivation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n and T3 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 8, otherwise go to step 9.

8. The UE shall stop sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell during SCell deactivation.

   - If the last CSI report is received by the SS earlier than or equal to slot n + $\frac{\mathrm{T_{HARQ}+3ms}}{NR\ slot\ length}$

- and DTX is not observed by the SS outside the slot n + 1 + $\frac{\text{THARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T3,

- Then the number of successes for the event "Deactivation" is increased by one. Otherwise, count a fail for the event "Deactivation".

9. When T3 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 6, or Deactivation in step 7 was not acknowledged, the SS shall transmit an *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR PSCell. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

10. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

11. The SS shall transmit an *RRCConnectionReconfiguration* message with condition MCG and SCG according to TS 36.508 [25] Table 4.6.1-8 to ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. The UE shall transmit an RRCConnectionReconfigurationComplete message.

12. Repeat steps 2-11 until a test verdict has been achieved.

Each of the events "Activation" and "Deactivation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.
If all events pass, the test passes. If one event fails, the test fails.

5.5.3.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3, with following exception:

Table 5.5.3.6.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-7 with Condition Deactivated SCell Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.5.3.6.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell	Table 5.5.3.6.4.3-5	
measConfig	MeasConfig	Table 5.5.3.6.4.3-2A	
}			
}			
}			

Table 5.5.3.6.4.3-2A: MeasConfig (Table 5.5.3.6.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**

measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 5.5.3.6.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 5.5.3.6.4.3-4	
}			
}			
}			
}			

Table 5.5.3.6.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 5.5.3.6.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 5.5.3.6.4.3-5: CellGroupConfig-SCell (Table 5.5.3.6.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 5.5.3.6.4.3-6	
}			

sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 5.5.3.6.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 5.5.3.6.4.3-6: ServingCellConfig-SpCell (Table 5.5.3.6.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 5.5.3.6.4.3-7: ServingCellConfig-SCell (Table 5.5.3.6.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

5.5.3.6.5 Test requirement

Table 5.5.3.6.5-1 defines the cell specific test parameters and Table 5.5.3.6.5-2 defines OTA related test parameters.

Table 5.5.3.6.5-1: Cell specific test parameters for FR2 SCell activation case with FR1 PSCell

Parameter		Unit	Cell 2			Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
SSB ARFCN			**freq1**			**freq2**			**freq3**		
Duplex mode	Config 1,2		TDD								
TDD configuration	Config 1,2		TDDConf.3.1								
$BW_{channel}$	Config 1,2	MHz	100: $N_{RB,c}$ = 66								
DL initial BWP configuration	Config 1,2		DLBWP.0.1								
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1								
UL initial BWP configuration	Config 1,2		ULBWP.0.1								
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1								
Timing offset to Cell 2		ms	Not Applicable			0			0		
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD			SR.3.1 TDD			SR.3.1 TDD		

RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD		CR.3.1 TDD	
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD		CCR.3.1 TDD	
TRS configuration	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD		TRS.2.1 TDD	
CSI-RS configuration	Config 1,2		CSI-RS.3.1 TDD	N/A	CSI-RS.3.1 TDD	N/A	CSI-RS.3.1 TDD
CSI reporting periodicity	Config 1,2	ms	5	5		5	
OCNG Patterns			OP.1				
SMTC configuration			SMTC.1				
SSB configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2		N/A	SSB.1 FR2
EPRE ratio of PSS to SSS		dB	0				
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS (Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Propagation condition		-	AWGN				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Table 5.5.3.6.5-2: OTA related test parameters for FR2 SCell activation case with FR1 PSCell

Parameter[Note 6]	Unit	Cell 3			Cell 4		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1 in TS 38.133 [6]					
Assumption for UE beams[Note 7]		Rough			Rough		
N_{oc} [Note1]	dBm/15kHz[Note4]	-112			-112		
N_{oc} [Note1]	dBm/SCS[Note3]	-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB	14			N/A	14	14
SS-RSRP[Note2]	dBm/SCS [Note4]	-88.97			N/A	-88.97	-88.97
$\hat{E}_s / I_{ot}$	dB	14			N/A	14	14
Io[Note2]	dBm/95.04 MHz [Note4]	-59.81			-73.98	-59.81	-59.81
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone							
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone							
Note 6: All parameters apply for configuration 1 and 2							
Note 7: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6], and does not limit UE implementation or test system implementation							

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PSCell in the slot.

During T2 the UE shall start sending CSI reports for SCell1 and SCell2 with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table 5.5.3.6.4.1-3
- $T_{activation_time}$ = 5ms + $T_{FineTiming}$ = 25ms
- $T_{CSI_Reporting}$ = 10ms
- NR slot length is 0.125ms

During T3 the UE shall stop sending CSI reports for both SCells no later than slot n + $\frac{T_{HARQ}+3\,ms}{NR\ slot\ length}$.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

5.5.3.7 EN-DC FR2 direct SCell activation at SCell addition of known SCell

Editor's Note: This test case has been completed for the following configurations:

- *Test frequency f ≤ 40.8 GHz*
- *UE PC3*
- *The test is incomplete for UE power classes other than PC3*
- *The test is incomplete for test frequencies > 40.8 GHz*

5.5.3.7.1 Test Purpose

The purpose of this test is to verify that the direct SCell activation time is within the requirements, when the SCell in FR2 is known by the UE at the time of activation.

5.5.3.7.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards and supporting 2DL CA and direct SCell activation.

5.5.3.7.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 4.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause 8.3 and A.5.5.3.7.

5.5.3.7.4 Test description

5.5.3.7.4.1 Initial Conditions

This test shall be tested using any of the test configurations in Table 5.5.3.7.4.1-1.

Table 5.5.3.7.4.1-1: Supported test configurations for FR2 SCell activation case with FR2 PSCell

Test Case ID	Description

5.5.3.7-1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.3.7-2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to pass in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 5.5.3.7.4.1-2 and Table 5.5.3.7.4.1-3.

Table 5.5.3.7.4.1-2: Initial conditions for known FR2 SCell activation case with FR2 PSCell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 5.5.3.7.4.1-3: General test parameters for FR2 SCell activation case with FR2 PSCell

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	Two radio channels are used for this test. One for E-UTRA cell and two for NR Cell
Active PCell		Cell1	PCell on RF channel number 1. As specified in clause TS 38.133[6] A.3.7.2.2
Active PSCell		Cell2	PSCell on RF channel number 2.
SCell		Cell3	secondary cell on RF channel number 3
DRX		OFF	Continuous monitoring of PCell/PSCell
PRACH configuration on cell2		FR2 configuration 2	Captured in TS 38.133[6] A.3.8.3.2
PSCell CQI/PMI periodicity and offset configuration index		slot5	CQI reporting for PSCell every uplink slot
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on carrier frequency of cell1.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on carrier frequency of cell2.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on carrier frequency of cell3.
T1	s	7	During this time the PCell/PSCell shall be known and cell3 is detected, and UE shall report a valid CQI for PCell/PSCell.
T2	s	N_{direct}	During this time the UE shall be configured with directly activated SCell1.
T3	s	1	During this time the UE shall report a valid CQI for PCell/PSCell and SCell.

1. Message contents are defined in clause 5.5.3.7.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR2 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the SCell.

5.5.3.7.4.2 Test procedure

Same as in 4.5.3.5.4.2 with the following exception:

2. Set the parameters according to T1 in Tables 5.5.3.7.5-1 and A.6.1.2-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 5.5.3.7.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

5.5.3.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the exception as described in section 4.5.3.5.4.3.

5.5.3.7.5 Test requirement

Table 5.5.3.7.5-1 defines the cell specific test parameters will replace corresponding values in Table 4.5.3.5.5-1 and Table 4.5.3.5.5-1A, and Table 5.5.3.7.5-2 defines OTA related test parameters.

Table 5.5.3.7.5-1: Cell specific test parameters for FR2 SCell activation case with FR2 PSCell

ParameterNote 5	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
SSB ARFCN		freq1			freq2		
Duplex mode		TDD			TDD		
TDD configuration		TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
PDSCH Reference measurement channel		SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET Reference Channel		CR.3.1 TDD			CR.3.1 TDD		
RMC CORESET Reference Channel		CCR.3.1 TDD			CCR.3.1 TDD		
DL initial BWP configuration		DLBWP.0.1					
DL dedicated BWP configuration		DLBWP.1.1					
UL initial BWP configuration		ULBWP.0.1					
UL dedicated BWP configuration		ULBWP.1.1					
OCNG Patterns		OP.1					
SMTC configuration		SMTC.1					
SSB configuration		SSB.1 FR2					
TCI state		TCI.State.0					
TRS configuration		TRS.2.1 TDD					
EPRE ratio of PSS to SSS	dB	0					
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD					
reportConfigType		periodic			N/A		
reportQuantity		cri-RI-PMI-CQI			N/A		
CSI reporting periodicity	slot	40			N/A		
CSI reporting offset	slot	4			N/A		
PDSCH/PDCCH subcarrier spacing	kHz	120					
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS Note 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
Propagation conditions		AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: All parameters apply for configuration 1 and 2.

Table 5.5.3.7.5-2: OTA related test parameters for FR2 SCell activation case with FR2 PSCell

ParameterNote 6	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.9.1					
Assumption for UE beams Note 7		Rough			Rough		
N_{oc} Note1	dBm/15kHz Note4	-104.7 ~~+TT~~			-104.7~~+TT~~		
N_{oc} Note1	dBm/SCS Note 3	-95.7~~+TT~~			-95.7~~+TT~~		
$\hat{E}_s / N_{oc}$	dB	7~~+TT~~			7+TT		
SS-RSRP Note2	dBm/SCS Note4	-88.7~~+TT~~			-88.7~~+TT~~		
$\hat{E}_s / I_{ot}$	dB	7~~+TT~~			7~~+TT~~		
Io Note2	dBm/95.04 MHz Note4	-58.92~~+TT~~			-58.92~~+TT~~		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1 and 2
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall accomplish the activation of the SCell no later than subframe m+N_{direct} as defined in TS 38.133[6], clause 8.3.4. Time period T3 starts at (m+ N_{direct}), at which point UE shall be reporting a valid CQI for both PSCell and SCell.

During T3 the UE shall send CSI reports for SCell with non-zero CQI index and continue to send CSI reports for SCell 1 with non-zero CQI index until the end of T3. All of the above test requirements shall be fulfilled in order for the observed SCell1 direct activation delay to be counted as correct. The rate of correct observed SCell1 direct activation delay during repeated tests shall be at least 90%.

NOTE: In this test case the placement of interruptions is only verified in NR PSCell.

5.5.3.8 EN-DC FR2 fast SCell Activation of SCell in FR2 intra-band

Editor's note: This test case is incomplete only in following aspects:

-

- The test is incomplete for test frequencies > 40.8 GHz

5.5.3.8.1 Test purpose

The purpose of this test is to verify that the fast SCell activation times are within the requirements stated in TS 38.133 [6] clause 8.3.16, when the SCell in FR2 is known by the UE at the time of activation.

5.5.3.8.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 17 onwards and supporting 2DL CA in NR and fast SCell activation.

5.5.3.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.16.

5.5.3.8.4 Test description

5.5.3.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for LTE PCell, NR PSCell and NR SCell are shown in Table 5.5.3.8.4.1-1.

Table 5.5.3.8.4.1-1: Supported test configurations for FR2 SCell activation case with FR2 PSCell

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.3.8.4.1-2 and Table 5.5.3.8.4.1-3.

Table 5.5.3.8.4.1-2: Initial conditions for fast known FR2 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from 5.5.3.8.5-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	Connection Diagram
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 5.5.3.8.4.1-3: General test parameters for FR2 SCell activation case with FR2 PSCell

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
Cell3 timing offset to cell2	µs	0	
Time alignment error between cell3 and cell2	µs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.

T2	s	1	During this time the UE shall activate the SCell.
A3-offset	dB	-15	
T_{HARQ}	ms	k_1NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [8]
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe, }\mu} + 1$	As specified in clause 4.3 of TS 38.213 [8]

1.Message contents are defined in clause 5.5.3.8.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR2 cells in the same frequency. Cell 2 is the PSCell and Cell 3 is the known activated SCell.

5.5.3.8.4.2 Test procedure

The test consists of two successive time periods, with duration of T1 and T2, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell and triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m (where m mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot m + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in TS 38.133 [6] clause 8.3.16. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in TS 38.133 [6] clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in TS 38.133 [6] clause 8.2.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation of SCell. The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters according to T1 in Tables 5.5.3.8.5-1 and A.6.1.2-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 5.5.3.8.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

3a. The UE send a *MeasurementReport* message embedded in *ULInformationTransferMRDC.*

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.55) in a slot # denoted m and T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 7.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot s_{first_CSI} = m + 1 + $\frac{\mathrm{T_{HARQ}+3ms}+T_{CSI_Reporting}}{NR\ slot\ length}$,

   - or slot $s^{int}_{first_CSI} = m + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting}+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot s_{first_CSI} was subject to interruption,

   - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI}$ = m + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$, where $T_{activation_time} = T_{FirstATRS}$ + 5ms, as defined in TS 38.133 [6] clause 8.3.16,

   - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

   - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if $s_{nonzero_CQI}$ was subject to interruption,

   - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $m + 1 + \frac{T_{HARQ}+\mathrm{TRRC_process}+T_1+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

   - Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 6, the SS shall transmit an *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508[25] Table 4.6.1-8 to release NR PSCell. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit an *RRCConnectionReconfiguration* message with condition MCG and SCG according to TS 36.508 [25] Table 4.6.1-8 to ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. The UE shall transmit an RRCConnectionReconfigurationComplete message.

10. Repeat steps 2-9 until a test verdict has been achieved.

The event "Activation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

5.5.3.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3, with following exception:

Table 5.5.3.8.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-7 with Condition Deactivated SCell

Table 5.5.3.8.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell	Table 5.5.3.8.4.3-5	
measConfig	MeasConfig	Table 5.5.3.8.4.3-2A	
}			
}			
}			

Table 5.5.3.8.4.3-2A: MeasConfig (Table 5.5.3.8.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 5.5.3.8.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 5.5.3.8.4.3-4	
}			
}			
}			
}			

Table 5.5.3.8.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 5.5.3.8.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4

Information Element	Value/remark	Comment	Condition
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 5.5.3.8.4.3-5: CellGroupConfig-SCell (Table 5.5.3.8.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 5.5.3.8.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 5.5.3.8.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 5.5.3.8.4.3-6: ServingCellConfig-SpCell (Table 5.5.3.8.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 5.5.3.8.4.3-7: ServingCellConfig-SCell (Table 5.5.3.8.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6 with		

	condition FastActivation_SCell		
servingCellMO	2		
}			

5.5.3.8.5 Test requirement

Table 5.5.3.8.5-1 defines the primary level settings including test tolerances for all tests and Table 5.5.3.8.5-2 defines OTA related test parameters.

Table 5.5.3.8.5-1: Cell specific test parameters for FR2 SCell activation case with FR2 PSCell

Parameter[Note 5]	Unit	Cell 2		Cell 3	
		T1	T2	T1	T2
SSB ARFCN		freq1		freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		66		66	
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD		CR.3.1 TDD	
RMC CORESET Reference Channel		CCR.3.1 TDD		CCR.3.1 TDD	
DL initial BWP configuration		DLBWP.0.1			
DL dedicated BWP configuration		DLBWP.1.1			
UL initial BWP configuration		ULBWP.0.1			
UL dedicated BWP configuration		ULBWP.1.1			
OCNG Patterns		OP.1			
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2			
Aperiodic CSI-RS for Scell activation		-		TRS.2.3	
gapBetweenBursts	slots	N/A			
TCI state		TCI.State.0			
TRS configuration		TRS.2.1 TDD			
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD			
reportConfigType		periodic		N/A	
reportQuantity		cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	slot	40		N/A	
CSI reporting offset	slot	4		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	120			
EPRE ratio of PSS to SSS	dB	0			
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS[Note 1]					
EPRE ratio of OCNG to OCNG DMRS [Note 1]					
Propagation conditions		AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	Void
Note 4:	Void
Note 5:	All parameters apply for configuration 1 and 2.

Table 5.5.3.8.5-2: OTA related test parameters for FR2 SCell activation case with FR2 PSCell

Parameter Note 6	Unit	Cell 2		Cell 3	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 1 according to A.9.1			
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-104.7		-104.7	
N_{oc} Note1	dBm/SCS Note 3	-95.7		-95.7	
$\hat{E}_s / N_{oc}$	dB	7		7	
SS_RP Note2	dBm/SCS Note4	-88.7		N/A	
CSI-RS_RP Note2	dBm/SCS Note4	N/A		-88.7	
$\hat{E}_s / I_{ot}$	dB	7		7	
Io Note2	dBm/95.04 MHz Note4	-58.92		-58.92	

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	Es/Iot, SS_RP, CSI_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	All parameters apply for configuration 1 and 2
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot (m+k).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot m + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activtion_time}}+T_{\mathrm{CSI_Reporting}}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS}$ + 5ms, as defined in TS 38.133 [6] clause 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $m + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$.

The interruption of PSCell shall not be more than the values specified for EN-DC in TS 38.133 [6] Clause 8.2.1.2.4.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activtion_time}}+T_{\mathrm{CSI_Reporting}}}{NR\ slot\ length}$ as defined in TS 38.133 [6] clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI. In this test case the placement of interruptions is only verified in NR PSCell.

5.5.4 UE UL carrier RRC reconfiguration delay

5.5.5 Link recovery procedures

5.5.5.0 Minimum conformance requirements

5.5.5.0.1 Minimum conformance requirements for SSB-based BFD and link recovery procedures

[TS38.133, clause 8.5.2.1]

The requirements in this clause apply for each SSB resource in the set $\overline{q}_0$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in TS 38.133 [6] clause 8.5.2.2. The requirements in this clause could not be applicable if UE is required to perform beam failure detection on more than 1 serving cell per band.

Table 5.5.5.0.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

[TS38.133, clause 8.5.2.2]

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_SSB}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB}$ ms period.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 5.5.5.0.1-2 for FR2 with scaling factor N=8.

For FR2,

- $P=1/(1-T_{SSB}/T_{SMTCperiod})$, when BFD-RS is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- $P = P_{sharing\ factor}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).
- $P=1/(1-T_{SSB}/MGRP-T_{SSB}/T_{SMTCperiod})$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq$ MGRP or
  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5*T_{SMTCperiod}$

- $P= P_{sharing\ factor}$ /(1-T_{SSB}/MGRP), when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5*T_{SMTCperiod}$

- $P=1/(1-T_{SSB}/ T_{SMTCperiod})$, when the BFD-RS resource is partially overlapped with measurement gap (T_{SSB} <MGRP) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- $P= P_{sharing\ factor}$ /(1-T_{SSB}/MGRP), when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

- $P_{sharing\ factor}$ = 1, if the BFD-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;- not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor}$ = 3, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, given the SMTC offset of all CCs in FR2 provided the same offset.

Longer evaluation period would be expected if the combination of BFD resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 5.5.5.0.1-2: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR2

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	Max([50], Cceil(5*P*N)*T_{SSB})
DRX cycle ≤ 320ms	Mmax([50], Cceil(7.5*P*N)*Mmax(T_{DRX},T_{SSB}))
DRX cycle > 320ms	Cceil(5*P*N)*T_{DRX}
NOTE: T_{SSB} is the periodicity of SSB in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

[TS38.133, clause 8.5. 2.3]

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

For FR2, when the SSB for BFD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

[TS38.133, clause 8.5.4]

When the radio link quality on all the RS resources in set $\overline{q}_0$ is worse than Q_{out_LR}, Layer 1 of the UE shall send a beam failure instance indication to the higher layers.

The beam failure instance evaluation for the RS resources in set $\overline{q}_0$ shall be performed as specified in clause 6 in TS 38.213. Two successive indications from Layer 1 shall be separated by at least $T_{Indication_interval_BFD}$.

When DRX is not used, $T_{Indication_interval_BFD}$ is max(2ms, $T_{SSB\text{-}RS,M}$)) or max(2ms, $T_{CSI\text{-}RS,M}$), where $T_{SSB\text{-}RS,M}$ and $T_{CSI\text{-}RS,M}$ is the shortest periodicity of all RS resources in set $\overline{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\overline{q}_0$ or CSI-RS resource in the set $\overline{q}_0$.

When DRX is used, for SSB based link quality measurement,

- $T_{Indication_interval_BFD}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{SSB\text{-}RS,M}$), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

[TS38.133, clause 8.5.5.1]

The requirements in this clause apply for each SSB resource in the set $\overline{q}_1$ configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in TS 38.133 [6] clause 8.5.5.2. The requirements in this clause could not be applicable if UE is required to perform candidate beam detection on more than 1 serving cell per band or on more than one band among a set of bands that it can receive with a common beam.

[TS38.133, clause 8.5.5.2]

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in set $\overline{q}_1$ estimated over the last $T_{Evaluate_CBD_SSB}$ ms period becomes better than the threshold Q_{in_LR} provided SSB_RP and SSB Ês/Iot are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 5.5.5.0.1-3 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_SSB}$ is defined in Table 5.5.5.0.1-3 for FR2 with scaling factor N=8.

Where,

For FR2,

- P=1/(1-T_{SSB}/$T_{SMTCperiod}$), when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion (T_{SSB} < $T_{SMTCperiod}$).
- P is $P_{sharing\ factor}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC period (T_{SSB} = $T_{SMTCperiod}$).
- P=1/(1-T_{SSB}/MGRP-T_{SSB}/$T_{SMTCperiod}$), when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion (T_{SSB} < $T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod}$ ≠ MGRP or
  - $T_{SMTCperiod}$ = MGRP and T_{SSB} < 0.5*$T_{SMTCperiod}$
- P= $P_{sharing\ factor}$ /(1-T_{SSB}/MGRP), when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion (T_{SSB} < $T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and T_{SSB} = 0.5*$T_{SMTCperiod}$
- P=1/(1-T_{SSB}/ $T_{SMTCperiod}$), when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion (T_{SSB} < $T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap
- P= $P_{sharing\ factor}$ /(1-T_{SSB}/MGRP), when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion (T_{SSB} = $T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

- $P_{sharing\ factor}$ = 1, if the candidate beam detection RS outside measurement gap is
  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;
- not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured - $P_{sharing\ factor}$ = 3, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of P_{CBD} used in Table 5.5.5.0.1-3 are defined as

For each SSB resource in the set $\overline{q}_1$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{CBD} = 1.

For each SSB resource in the set $\overline{q}_1$ configured for PSCell in NR-DC

- P_{CBD} = 2 if UE is configured for candidate beam detection on SCell, 1 otherwise.

For each SSB resource in the set $\overline{q}_1$ configured for a SCell

- P_{CBD} = Z in EN-DC or NE-DC or SA.
- P_{CBD} = 2* Z in NR-DC.

Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell Table 5.5.5.0.1-3: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR2

Configuration	$T_{Evaluate_CBD_SSB}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$Max(25, Ceil(3 \times P \times N \times P_{CBD}) \times T_{SSB})$
DRX cycle > 320ms	$Ceil(3 \times P \times N \times P_{CBD}) \times T_{DRX}$
NOTE: T_{SSB} is the periodicity of SSB in the set $\overline{q}_1$. T_{DRX} is the DRX cycle length.	

[TS38.133, clause 8.5.5.3]

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

References: The conformance requirements covered in the current TC are specified in: TS 38.133 [6], clauses 8.5.2.1, 8.5.2.2, 8.5.2.3, 8.5.4, 8.5.5.1, 8.5.5.2 and 8.5.5.3.

5.5.5.0.2 Minimum conformance requirements for CSI-RS-based BFD and link recovery procedures

[TS38.133, clause 8.5.3.1]

The requirements in this clause apply for each CSI-RS resource in the set $\overline{q}_0$ of resource configurations for a serving cell, provided that the CSI-RS resource(s) in set $\overline{q}_0$ for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in TS 38.133 clause 8.5.3.2. UE is not expected to perform beam failure detection measurements on the CSI-RS configured as BFD-RS if the CSI-RS is not QCL-ed, with QCL-TypeD when applicable, with the RS in the active TCI state of any CORESET configured in the UE active BWP. The requirements in this clause could not be applicable if UE is required to perform beam failure detection on more than 1 serving cell per band or on more than one band among a set of bands that it can receive with a common beam.

Table 5.5.5.0.2-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

[TS38.133, clause 8.5.3.2]

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_CSI-RS}$ ms period becomes worse than the threshold $Q_{out_LR_CSI-RS}$ within $T_{Evaluate_BFD_CSI-RS}$ ms period.

The value of $T_{Evaluate_BFD_CSI-RS}$ is defined in Table 5.5.5.0.2-2 for FR2 with N=1. The requirements of $T_{Evaluate_BFD_CSI-RS}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR2,

- P=1, when the BFD-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P=1/(1 - T_{CSI-RS}/MGRP)$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is not overlapped with SMTC occasion ($T_{CSI-RS} < MGRP$)
- $P=1/(1 - T_{CSI-RS} /T_{SMTCperiod})$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).
- P is $P_{sharing\ factor}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).
- P is $1/(1- T_{CSI-RS} /MGRP - T_{CSI-RS} /T_{SMTCperiod})$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq MGRP$ or

- $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} < 0.5*T_{SMTCperiod}$

- P is $1/(1- T_{CSI-RS} /MGRP)* P_{sharing\ factor}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} = 0.5*T_{SMTCperiod}$

- P is $1/\{1- T_{CSI-RS} / T_{SMTCperiod} \}$, when the BFD-RS resource is partially overlapped with measurement gap ($T_{CSI-RS} <$ MGRP) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- P is $1/(1- T_{CSI-RS} /MGRP)* P_{sharing\ factor}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} <$ MGRP)

- $P_{sharing\ factor}$ = 1, if the BFD-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;

  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,

- $P_{sharing\ factor}$ is 3, otherwise.

where,

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

NOTE: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of BFD-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{BFD} used in Table 5.5.5.0.2-2 are defined as

- M_{BFD} = 10, if the CSI-RS resource(s) in set $\bar{q}_0$ used for BFD is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{BFD} used in Table 5.5.5.0.2-2 are defined as

For each CSI-RS resource in the set $\bar{q}_0$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{BFD} = 1.

For each CSI-RS resource in the set $\bar{q}_0$ configured for PSCell in NR-DC

P_{BFD} = 2 if UE is configured for beam failure detection on SCell, 1 otherwise.

For each CSI-RS resource in the set $\bar{q}_0$ configured for a SCell

- P_{BFD} = Z in EN-DC or NE-DC or SA.
- P_{BFD} = 2* Z in NR-DC.

  Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell

Table 5.5.5.0.2-2: Evaluation period $T_{Evaluate_BFD_CSI\text{-}RS}$ for FR2

Configuration	$T_{Evaluate_BFD_CSI\text{-}RS}$ (ms)
no DRX	$Max(50, Ceil(M_{BFD} \times P \times N \times P_{BFD}) \times T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$Max(50, Ceil(1.5 \times M_{BFD} \times P \times N \times P_{BFD}) \times Max(T_{DRX}, T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$Ceil(M_{BFD} \times P \times N \times P_{BFD}) \times T_{DRX}$
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

[TS38.133, clause 8.5.3.3]

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For FR2, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM/BFD/CBD/L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for BFD measurement and the other CSI-RS. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.
  - The CSI-RS for BFD measurement or the other CSI-RS in a resource set configured with repetition ON, or
  - The other CSI-RS is configured in set $\overline{q}_1$ and beam failure is detected, or
  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

[TS38.133, clause 8.5.4]

When the radio link quality on all the RS resources in set $\overline{q}_0$ is worse than Q_{out_LR}, Layer 1 of the UE shall send a beam failure instance indication to the higher layers.

The beam failure instance evaluation for the RS resources in set $\overline{q}_0$ shall be performed as specified in clause 6 in TS 38.213. Two successive indications from Layer 1 shall be separated by at least $T_{Indication_interval_BFD}$.

When DRX is not used, $T_{Indication_interval_BFD}$ is max(2ms, $T_{SSB\text{-}RS,M}$)) or max(2ms, $T_{CSI\text{-}RS,M}$), where $T_{SSB\text{-}RS,M}$ and $T_{CSI\text{-}RS,M}$ is the shortest periodicity of all RS resources in set $\overline{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\overline{q}_0$ or CSI-RS resource in the set $\overline{q}_0$.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{Indication_interval_BFD}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{CSI\text{-}RS,M}$), if DRX_cycle_length ≤ 320ms,

- $T_{Indication_interval_BFD}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

[TS38.133, clause 8.5.6.1]

The requirements in this clause apply for each CSI-RS resource in the set $\overline{q}_1$ configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in TS 38.133 clause 8.5.6.2. The requirements in this clause could not be applicable if UE is required to perform candidate beam detection on more than 1 serving cell per band or on more than one band among a set of bands that it can receive with a common beam.

[TS38.133, clause 8.5.6.2]

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in set $\overline{q}_1$ estimated over the last $T_{Evaluate_CBD_CSI-RS}$ [ms] period becomes better than the threshold Q_{in_LR} within $T_{Evaluate_CBD_CSI-RS}$ [ms] period provided CSI-RS Ês/Iot is according to TS 38.133 Annex Table B.2.4.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in Table 5.5.5.0.2-3 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_CSI-RS}$ is defined in Table 5.5.5.0.2-3 for FR2 with scaling factor N=8.

For FR2,

- P=1, when candidate beam detection RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P=1/(1 – T_{CSI-RS}/MGRP)$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is not overlapped with SMTC occasion ($T_{CSI-RS} < MGRP$)
- $P=1/(1 – T_{CSI-RS} /T_{SMTCperiod})$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).
- $P = P_{sharing\ factor}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).
- P is $1/(1- T_{CSI-RS} /MGRP - T_{CSI-RS} /T_{SMTCperiod})$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq MGRP$ or
  - $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} < 0.5*T_{SMTCperiod}$
- P is $1/(1- T_{CSI-RS} /MGRP)* P_{sharing\ factor}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} = 0.5*T_{SMTCperiod}$
- P is $1/\{1- T_{CSI-RS} / T_{SMTCperiod} \}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap
- P is $1/(1- T_{CSI-RS} /MGRP)* 3$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)- $P_{sharing\ factor} = 1$, if the candidate beam detection RS outside measurement gap is
  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;

- not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Longer evaluation period would be expected if the CSI-RS is on the same OFDM symbols with RLM, BFD, BM-RS, or other CBD-RS, according to the measurement restrictions defined in TS 38.133 clause 8.5.6.3.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{CBD} used in Table 8.5.6.2-1 and Table 8.5.6.2-2 are defined as

- $M_{CBD} = 3$, if the CSI-RS resource configured in the set $\bar{q}_1$ is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{CBD} used in Table 8.5.6.2-1 and Table 8.5.6.2-2 are defined as

For each CSI-RS resource in the set $\bar{q}_1$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- $P_{CBD} = 1$.

For each CSI-RS resource in the set $\bar{q}_1$ configured for PSCell in NR-DC

- $P_{CBD} = 2$ if UE configured for candidate beam detection on SCell, 1 otherwise.

For each CSI-RS resource in the set $\bar{q}_1$ configured for a SCell

- P_{CBD} = Z in EN-DC or NE-DC or SA.

- $P_{CBD} = 2^*$ Z in NR-DC.

Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell

Table 5.5.5.0.2-3: Evaluation period $T_{Evaluate_CBD_CSI\text{-}RS}$ for FR2

Configuration	$T_{Evaluate_CBD_CSI\text{-}RS}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$\text{Max}(25, \text{Ceil}(M_{CBD} \times P \times N \times P_{CBD}) \times T_{CSI\text{-}RS})$
DRX cycle > 320ms	$\text{Ceil}(M_{CBD} \times P \times N \times P_{CBD}) \times T_{DRX}$
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

[TS38.133, clause 8.5.6.3]

For FR2, when the CSI-RS for CBD measurement is in the same OFDM symbol as SSB for RLM/BFD/CBD/L1-RSRP measurement, UE is not required to receive CSI-RS for CBD measurement in the PRBs that overlap with an SSB.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and the other CSI-RS. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

References: The conformance requirements covered in the current TC are specified in: TS 38.133 [6], clauses 8.5.3.1, 8.5.3.2, 8.5.3.3, 8.5.4, 8.5.6.1, 8.5.6.2 and 8.5.6.3.

5.5.5.0.3 Scheduling availability of UE during beam failure detection and candidate beam detection

[TS38.133, clause 8.5.7.3]

The following scheduling restriction applies due to beam failure detection.

- For the case where no RSs are provided for BFD, or when CSI-RS is configured for BFD is explicitly configured and is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON
  - There are no scheduling restrictions due to beam failure detection performed based on the CSI-RS.
- Otherwise
  - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on BFD-RS resource symbols to be measured for beam failure detection.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for BFD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for BFD measurement.

[TS38.133, clause 8.5.8.3]

The following scheduling restriction applies due to candidate beam detection

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, CSI-RS for tracking or CSI-RS for CQI on reference symbols to be measured for candidate beam detection.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for CBD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for CBD measurement.

References: The conformance requirements covered in the current TC are specified in: TS 38.133 [6], clauses 8.5.7.4, 8.5.8.3.

5.5.5.0.4 Requirements for Beam Failure Recovery in SCell

[TS 38.133, clause 8.5.9.1]

For the UE provided with a configuration of PUCCH transmission with a link recovery request (LRR) as described in clause 9.2.4 in TS 38.213 [3], if beam recovery procedure is triggered for any of SCells, the UE shall transmit SR for UL resource, followed by MAC CE providing one index for at least one corresponding SCell with radio link quality is worse than $Q_{out,LR}$, and the index q_{new} for a periodic CSI-RS configuration or for a SSB provided by higher layer, as described in clause 5.17 of TS38.321 [7], if any, for a corresponding SCell.

For the UE not provided with a configuration of PUCCH transmission with a link recovery request (LRR) as described in clause 9.2.4 in TS 38.213 [3], if beam recovery procedure is triggered for any of SCells, the UE shall transmit preamble for UL-SCH resource application, followed by MAC CE providing one index for at least one corresponding SCell with radio link quality is worse than $Q_{out,LR}$, and the index q_{new} for a periodic CSI-RS configuration or for a SSB provided by higher layer, as described in clause 5.17 of TS38.321 [7], if any, for a corresponding SCell.

[TS 38.133, clause 8.5.9.2]

Provided that UE is configured by *schedulingRequestIDForBFR* a configuration for LRR in a PUCCH transmission, after BFR is triggered on any of SCells as described in clause 5.17 of TS38.321 [7], UE shall be capable of transmit PUCCH with a LRR within a period of T, where

- $T = T_1 \times Ceil((T_2+D)/T_1)$ in which T_1, T_2 and D are defined as
  - T_1 is equal to the periodicity of PUCCH configured with *schedulingRequestIDForBFR*.
  - $T_2 = T_{Evaluate_CBD}$ is the evaluation period specified in TS 38.133 clause 8.5.5 or 8.5.6 for SSB or CSI-RS based candidate beam detection, that is $T_{Evaluate_CBD_SSB}$ or $T_{Evaluate_CBD_CSI-RS}$, depending on the applicable reference signal configured for candidate beam detection.
  - D = 2ms is the UE Processing time.

References: The conformance requirements covered in the current TC are specified in: TS 38.133 [6], clauses 8.5.9.1, 8.5.9.2.

5.5.5.0.5 Requirements for SSB based beam failure detection for UE fulfilling relaxed measurement criteria

[TS 38.133, clause 8.5.2.4]

This clause contains minimum requirements for SSB based relaxed beam failure detection.

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\bar{q}_0$ estimated over the last $T_{Evaluate_BFD_SSB_Relax}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB_Relax}$ ms period.

The value of $T_{Evaluate_BFD_SSB_Relax}$ is defined in Table 5.5.5.0.5-1 for FR2 with scaling factor N=8

The value of P is defined in 5.5.5.0.1.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 5.5.5.0.5-1: Evaluation period $T_{Evaluate_BFD_SSB_Relax}$ for FR2

Configuration	$T_{Evaluate_BFD_SSB_Relax}$ (ms)
$Mas(T_{DRX}, T_{SSB}) \le 80$ ms	$Max(50 \times K4, Ceil(7.5 \times K2 \times P \times N) \times Max(T_{DRX},T_{SSB}))$
$80ms < Max(T_{DRX}, T_{SSB}) \le 160$ ms	$Max(50, Ceil(7.5 \times P \times N) \times Max(T_{DRX},T_{SSB}))$
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length and no longer than 80ms. Note 2: K2 is the relaxation factor. K2 = 2. Note 3: K4 is the relaxation factor for the lower bound. K4 = K2, if 1 < K2 ≤ 2; K4 = 1 otherwise.	

5.5.5.0.6 TRP specific Minimum conformance requirements

5.5.5.0.6.1 Requirements for TRP specific CSI-RS based beam failure detection

[TS 38.133, clause 8.18.3]

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ estimated over the last $T_{Evaluate_BFD_CSI-RS}$ ms period becomes worse than the threshold $Q_{out_LR_CSI-RS}$ within $T_{Evaluate_BFD_CSI-RS}$ ms period.

The value of $T_{Evaluate_BFD_CSI-RS}$ is defined in Table 5.5.5.0.6.1 for FR2 with N=1. The requirements of $T_{Evaluate_BFD_CSI-RS}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{BFD} used in Table 5.5.5.0.6.1 is defined as

- M_{BFD} = 10, if the CSI-RS resource(s) in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ used for BFD is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{BFD} used in Table 5.5.5.0.6.1 is defined as

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{BFD} = 1.

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for PSCell in NR-DC

P_{BFD} = 2 if UE is configured for beam failure detection on SCell, 1 otherwise.

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for a SCell

- P_{BFD} = Z in EN-DC or NE-DC or SA.

- P_{BFD} = 2* Z in NR-DC.

Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell.

Table 5.5.5.0.6.1: Evaluation period $T_{Evaluate_BFD_CSI-RS}$ for FR2

Configuration	$T_{Evaluate_BFD_CSI-RS}$ (ms)
no DRX	Max(50, Ceil($M_{BFD} \times P \times N \times P_{BFD}*P_{TRP}$) × T_{CSI-RS})
DRX cycle ≤ 320ms	Max(50, Ceil(1.5 × $M_{BFD} \times P \times N \times P_{BFD}*P_{TRP}$) × Max($T_{DRX}$, T_{CSI-RS}))
DRX cycle > 320ms	Ceil($M_{BFD} \times P \times N \times P_{BFD}*P_{TRP}$) × T_{DRX}
Note: T_{CSI-RS} is the periodicity of CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

5.5.5.0.6.2 Requirements for CSI-RS based candidate beam detection

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ estimated over the last $T_{Evaluate_CBD_CSI-RS}$ [ms] period becomes better than the threshold Q_{in_LR} within $T_{Evaluate_CBD_CSI-RS}$ [ms] period provided CSI-RS Ês/Iot is according to Annex Table B.2.4.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in Table 5.5.5.0.6.2-1 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_CSI-RS}$ is defined in Table 8.18.6.2-2 for FR2 with scaling factor N=8.

measurement gap configurations does not meet pervious conditions.

Longer evaluation period would be expected if the CSI-RS is on the same OFDM symbols with RLM, BFD, BM-RS, or other CBD-RS, according to the measurement restrictions defined in clause 8.18.6.3.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{CBD} used in Table 5.5.5.0.6.2-1 is defined as

- M_{CBD} = 3, if the CSI-RS resource configured in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{CBD} used in Table 5.5.5.0.6.2-1 is defined as

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{CBD} = 1.

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PSCell in NR-DC

- P_{CBD} = 2 if UE configured for candidate beam detection on SCell, 1 otherwise.

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for a SCell

- P_{CBD} = Z in EN-DC or NE-DC or SA.
- P_{CBD} = 2* Z in NR-DC.

  Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell
- P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

The values of P_{TRP} defined in table 8.18.6.2-2 is defined as 2, if SSB/CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ are overlapped, else it is 1.

Table 5.5.5.0.6.2-1: Evaluation period $T_{Evaluate_CBD_CSI-RS}$ for FR2

Configuration	$T_{Evaluate_CBD_CSI-RS}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$Max(25, Ceil(M_{CBD} \times P \times N \times P_{CBD} \times P_{TRP}) \times T_{CSI-RS})$
DRX cycle > 320ms	$Ceil(M_{CBD} \times P \times N \times P_{CBD} \times P_{TRP}) \times T_{DRX}$
Note: T_{CSI-RS} is the periodicity of CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

5.5.5.0.6.3 Requirements for TRP specific Beam Failure Recovery

Same as in the clause 4.5.5.0.5.3.

5.5.5.0.6.4 Scheduling availability of UE during TRP specific beam failure detection

The following scheduling restriction applies due to TRP specific beam failure detection.

- For the case where no RSs are provided for BFD, or when CSI-RS is configured for BFD is explicitly configured and is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON
  - There are no scheduling restrictions due to TRP specific beam failure detection performed based on the CSI-RS.
- Otherwise
  - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on BFD-RS resource symbols to be measured for TRP specific beam failure detection.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on FR2 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to beam failure detection performed on FR2 serving cell(s) in different band(s), provided that UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for BFD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for BFD measurement.

5.5.5.0.6.5 Scheduling availability of UE during TRP specific candidate beam detection

The following scheduling restriction applies due to TRP specific candidate beam detection

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, CSI-RS for tracking or CSI-RS for CQI on reference symbols to be measured for TRP specific candidate beam detection.

When intra-band carrier aggregation in FR2 is configured, the scheduling restrictions on to one serving cell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to candidate beam detection performed on FR2 serving cell(s) in different band(s), provided that the FR2 serving cell(s) and the FR2 serving cell(s) for candidate beam detection are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for CBD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for CBD measurement.

5.5.5.1 EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

5.5.5.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test he downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5.

5.5.5.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from release 15 onwards.

5.5.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.5.1.

5.5.5.1.4 Test description

There are two cells configured in this test: E-UTRAN PCell and NR PSCell. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.5.1.4-1 shows the five different time durations and the corresponding variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure 5.5.5.1.4-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

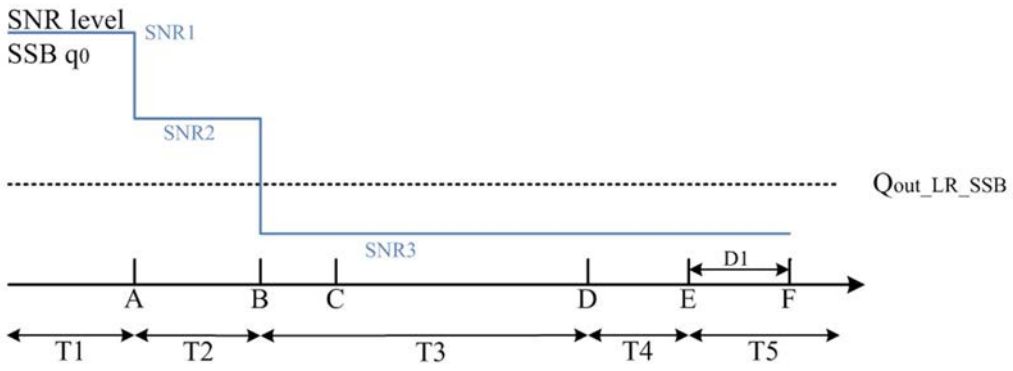

Figure 5.5.5.1.4-1: SNR for EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX

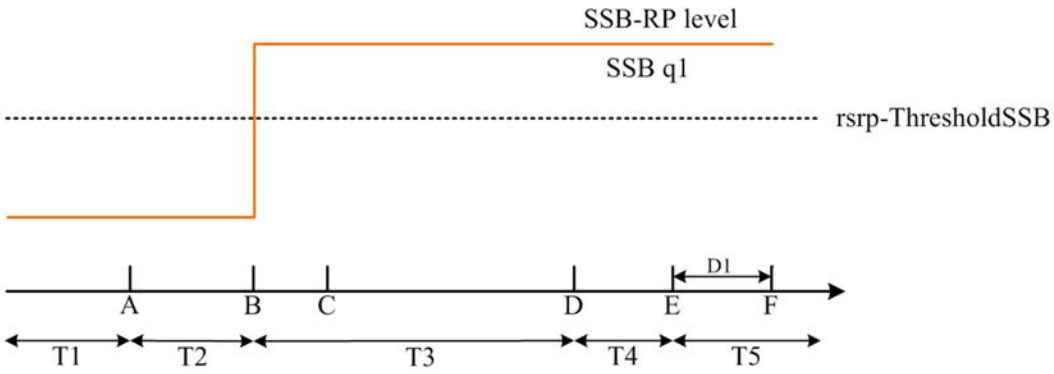

Figure 5.5.5.1.4-2: SSB_RP level variation for EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX

5.5.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.5.1.4.1-1.

Table 5.5.5.1.4.1-1: Supported test configurations for EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX

Configuration	Description
5.5.5.1-1	LTE FDD, NR TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
5.5.5.1-2	LTE TDD, NR TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
5.5.5.1-3	LTE FDD, NR TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
5.5.5.1-4	LTE TDD, NR TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
NOTE: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.5.1.4.1-2.

Table 5.5.5.1.4.1-2: Initial conditions for EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the test configuration selected from Table 5.5.5.1.4.1-1.	
Propagation conditions	AWGN	As specified in clause C.2.2.

Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.5.1.4.1-3.
2. Message contents are defined in clause 5.5.5.1.4.3.
3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.5.1.4.1-3: General test parameters for EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-4		Cell 1	
E-UTRA RF Channel Number		1-4		1	
Active PCell		1-4		Cell 2	
RF Channel Number		1-4		2	
Duplex mode		1-4		TDD	
TDD Configuration		1-4		TDDConf.3.1	Table A.1.5-3
$BW_{channel}$		1-4	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1-4		66	
PDSCH/PDCCH subcarrier spacing		1-4	kHz	120	
DL initial BWP configuration		1-4		DLBWP.0.1	Table A.8.1-1
DL dedicated BWP configuration		1-4		DLBWP.1.1	Table A.8.1-2
UL initial BWP configuration		1-4		ULBWP.0.1	Table A.8.2-1
UL dedicated BWP configuration		1-4		ULBWP.1.1	Table A.8.2-2
PDSCH Reference Channel		1-2		SR.3.2 TDD	Table A.1.1.2-3
		3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	Table A.1.2.2-3
		3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	Table A.1.3.2-3
		3-4		CCR.3.7 TDD	
OCNG parameters		1-4		OP.1	Table A.2.1-1
CP length		1-4		Normal	
PDSCH/PDCCH TCI state		1-4		TCI.State.0	Table A.10.2-1
CSI-RS for tracking		1-4		TRS.2.1 TDD	Table A.1.4A.2.1-1
SSB Configuration		1-2		SSB.1 FR2	Table A.3.2-1
		3-4		SSB.2 FR2	
SMTC Configuration		1-4		SMTC.3	Table A.4-1
PRACH Configuration		1-4		PRACH.2 FR2	Table A.7.2-1
DRX configuration		1-4		OFF	
SSB index assigned as BFD RS (q_0)		1-4		0	
SSB index assigned as CBD RS (q_1)		1-4		1	
SSB index assigned as RLM RS		1-4		0,1	
Beam failure detection transmission parameters	DCI format	1-4		1-0	
	Number of Control OFDM symbols	1-4		2	
	Aggregation level	1-4	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-4	dB	0	
	DMRS precoder granularity	1-4		REG bundle size	
	REG bundle size	1-4		6	
Gap pattern ID		1-4		gp0	
gapOffset		1-4	ms	0	

rlmInSyncOutOfSyncThreshold	1-4		absent	Value 0 is applied. (38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB	1-2	dBm/SCS	-109 Note 3	Threshold used for $Q_{in_LR_SSB}$
	3-4		-106 Note 3	
powerControlOffsetSS	1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-4		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer	1-4		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting	1-4		CSI-RS.3.1 TDD	Table A.1.4.2-3
reportConfigType	1-4		periodic	
reportQuantity	1-4		cri-RI-PMI-CQI	
CSI reporting periodicity	1-4	slot	40	
CSI reporting offset	1-4	slot	4	
T310	1-4	ms	1000	
N310	1-4		2	
T1	1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-4	s	2.61	
T3	1-4	s	1.64	
T4	1-4	s	0	
T5	1-4	s	1.01	
D1	1-4	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: Including test tolerance given in Annex F.1.3.2.				

5.5.5.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to E-UTRA Cell 1 and NR Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms).

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
2. Set the parameters of NR Cell 1 according to T1 in Table 5.5.5.1.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.
3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.5.1.5-1. T2 starts.
4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.5.1.5-1. T3 starts.
5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 5.5.5.1.5-1. T4 starts.
6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 5.5.5.1.5-1. T5 starts.
7. If the SS:
   a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point B; and
   b) does not detect preamble on a beam associated with candidate beam set q_1 before time point B; and
   c) detects preamble on a beam associated with candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.Otherwise the number of failed tests is increased by one.
8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 5.5.5.1.5-1.

9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with condition "Short_DCI" with the following exceptions:

Table 5.5.5.1.4.3-1: Common Exception messages for EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ Table H.3.1-3 with condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-8 with condition SSB BFD Table H.3.1-10 with condition SSB Table H.3.1-10A e Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition BFD

Table 5.5.5.1.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 5.5.5.1.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**

RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 5.5.5.1.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.508-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	1 entry		
ControlResourceSet[1]	ControlResourceSet	entry 1, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 5.5.5.1.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.508-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
	1		Test Configuration 3 & 4
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

Table 5.5.5.1.4.3-6: PDCCH *Search Space* for USS

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	2		
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n1		
aggregationLevel4	n2		Test Configuration 1 & 2
	n1		Test Configuration 3 & 4
aggregationLevel8	n0		
}			
}			

5.5.5.1.5 Test requirement

Tables 5.5.5.1.4.1-3 and 5.5.5.1.5-1 define the primary level settings including test tolerances for EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX.

Table 5.5.5.1.5-1: NR Cell specific test parameters for EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.9				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-4	dB	13.7 Note 11,12	5.7 Note 11,12	-12	-12	-12
SNR_SSB of set q_1	Config 1-4	dB	0.2	0.2	20 Note 12	20 Note 12	20 Note 12
SSB_RP of set q1	Config 1-2	dBm/ SCS	-104.5	-104.5	-84.7	-84.7	-84.7
	Config 3-4		-101.5	-101.5	-81.7	-81.7	-81.7
N_{oc}	Config 1-4	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 5.5.5.1.4-1.
NOTE 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
NOTE 10: Information about types of UE beam is given in TS 38.133 clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband
Note 12: Including test tolerance given in Annex F.1.3.2

Table 5.5.5.1.5-2: Void

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 960+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

5.5.5.2 EN-DC FR2 SSB-based beam failure detection and link recovery in DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

5.5.5.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5.

5.5.5.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from release 15 onwards and supporting long DRX cycle.

5.5.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.5.2.

5.5.5.2.4 Test description

There is one E-UTRAN PCell and one NR PSCell configured in this test. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.5.2.4-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure 5.5.5.2.4-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery

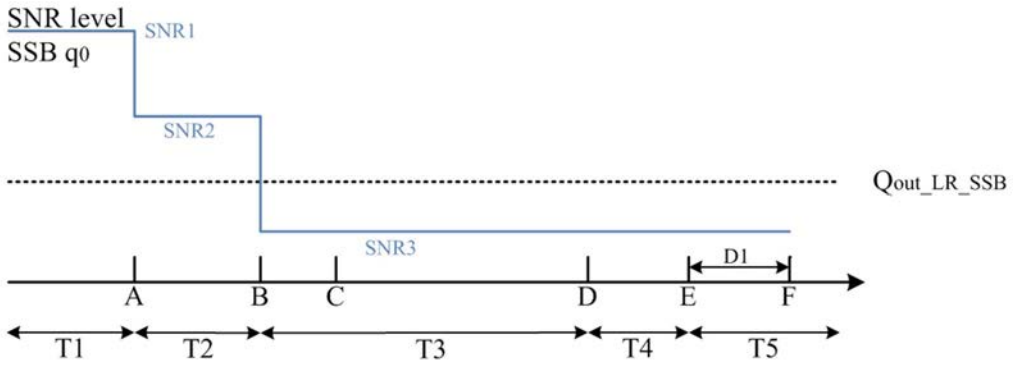

Figure 5.5.5.2.4-1: SNR variation for EN-DC FR2 SSB-based beam failure detection and link recovery in DRX

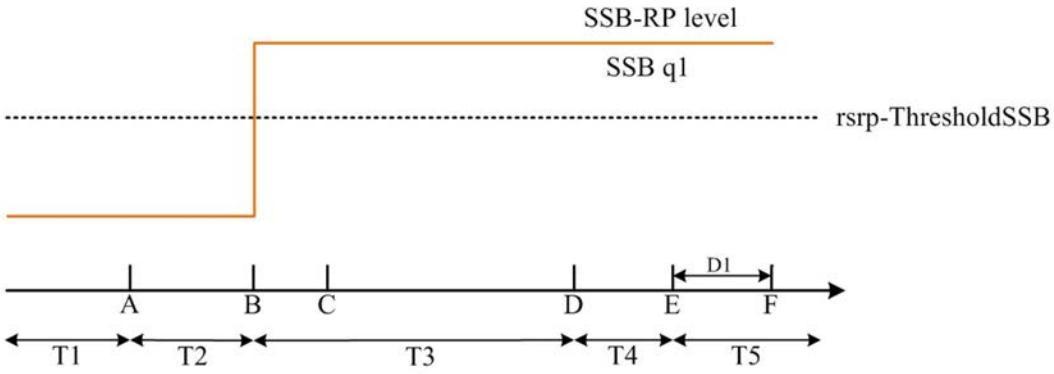

Figure 5.5.5.2.4-2: SSB_RP level variation for EN-DC FR2 SSB-based beam failure detection and link recovery in DRX

5.5.5.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.5.2.4.1-1.

Table 5.5.5.2.4.1-1: Supported test configurations for EN-DC FR2 SSB-based beam failure detection and link recovery in DRX

Configuration	Description
5.5.5.2-1	LTE FDD, NR TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
5.5.5.2-2	LTE TDD, NR TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
5.5.5.2-3	LTE FDD, NR TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
5.5.5.2-4	LTE TDD, NR TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
NOTE: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.5.2.4.1-2.

Table 5.5.5.2.4.1-2: Initial conditions for EN-DC FR2 SSB-based beam failure detection and link recovery in DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.

Parameter	Value		Comment
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.5.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.5.2.4.1-3. The DRX configuration for is according to Table 5.5.5.2.4.1-3. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

2. Message contents are defined in clause 5.5.5.2.4.3.

3. There is one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.5.2.4.1-3: General test parameters for EN-DC FR2 SSB-based beam failure detection and link recovery in DRX

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-4		Cell 1	
E-UTRA RF Channel Number		1-4		1	
Active PCell		1-4		Cell 2	
RF Channel Number		1-4		2	
Duplex mode		1-4		TDD	Table A.1.5-3
TDD Configuration		1-4		TDDConf.3.1	
$BW_{channel}$		1-4	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1-4		66	
PDSCH/PDCCH subcarrier spacing		1-4	kHz	120	
DL initial BWP configuration		1-4		DLBWP.0.1	Table A.8.1-1
DL dedicated BWP configuration		1-4		DLBWP.1.1	Table A.8.1-2
UL initial BWP configuration		1-4		ULBWP.0.1	Table A.8.2-1
UL dedicated BWP configuration		1-4		ULBWP.1.1	Table A.8.2-2
PDSCH Reference Channel		1-2		SR.3.2 TDD	Table A.1.1.2-3
		3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	Table A.1.2.2-3
		3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	Table A.1.3.2-3
		3-4		CCR.3.7 TDD	
OCNG parameters		1-4		OP.1	Table A.2.1-1
CP length		1-4		Normal	
PDSCH/PDCCH TCI state		1-4		TCI.State.0	Table A.10.2-1
CSI-RS for tracking		1-4		TRS.2.1 TDD	Table A.1.4A.2.1-1
SSB Configuration		1-2		SSB.1 FR2	Table A.3.2-1
		3-4		SSB.2 FR2	
SMTC Configuration		1-4		SMTC.3	Table A.4-1
PRACH Configuration		1-4		PRACH.2 FR2	Table A.7.2-1
DRX configuration		1-4		DRX.3	Table A.5-1
SSB index assigned as BFD RS (q_0)		1-4		0	
SSB index assigned as CBD RS (q_1)		1-4		1	
SSB index assigned as RLM RS		1-4		0,1	
Beam failure detection transmission parameters	DCI format	1-4		1-0	
	Number of Control OFDM symbols	1-4		2	
	Aggregation level	1-4	CCE	8	

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-4	dB	0	
	DMRS precoder granularity	1-4		REG bundle size	
	REG bundle size	1-4		6	
Gap pattern ID		1-4		N/A	
rlmInSyncOutOfSyncThreshold		1-4		absent	Value 0 is applied. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-109 Note 2	Threshold used for $Q_{in_LR_SSB}$
		3-4		-106 Note 2	
powerControlOffsetSS		1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-4		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1-4		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1-4		CSI-RS.3.1 TDD	Table A.1.4.2-3
reportConfigType		1-4		periodic	
reportQuantity		1-4		cri-RI-PMI-CQI	
CSI reporting periodicity		1-4	slot	40	
CSI reporting offset		1-4	slot	4	
T310		1-4	ms	1000	
N310		1-4		2	
T1		1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-4	s	3.37	
T3		1-4	s	2.8	
T4		1-4	s	0	
T5		1-4	s	0.61	
D1		1-4	s	0.57	
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: Including test tolerance given in Annex F.1.3.2					

5.5.5.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4
2. Set the parameters of NR Cell 1 according to T1 in Table 5.5.5.2.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.
3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.5.2.5-1. T2 starts.
4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.5.2.5-1. T3 starts.
5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 5.5.5.2.5-1. T4 starts.
6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 5.5.5.2.5-1. T5 starts.
7. If the SS:

a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point B; and

b) does not detect preamble on a beam associated with the candidate beam set q_1 before time point B; and

c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

the number of successful tests is increased by one. Otherwise the number of failed tests is increased by one.

8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 5.5.5.2.5-1.

9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.5.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with condition “Short_DCI” with the following exceptions:

Table 5.5.5.2.4.3-1: Common Exception messages for EN-DC FR2 SSB-based beam failure detection and link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with condition SSB BFD Table H.3.1-10 with condition SSB Table H.3.1-10A Table H.3.1-10B Table H.3.7-1 with condition DRX.3

Table 5.5.5.2.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			

}			

Table 5.5.5.2.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 5.5.5.2.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	1 entry		
ControlResourceSet[1]	ControlResourceSet	entry 1, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 5.5.5.2.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.508-1 [14], Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
	1		Test Configuration 3 & 4
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

Table 5.5.5.2.4.3-6: PDCCH *Search Space* for USS

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	2		
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n1		
aggregationLevel4	n2		Test Configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
			1 & 2
	n1		Test Configuration 3 & 4
aggregationLevel8	n0		
}			
}			

5.5.5.2.5 Test requirement

Tables 5.5.5.2.4.1-3 and 5.5.5.2.5-1 define the primary level settings including test tolerances for EN-DC FR2 SSB-based beam failure detection and link recovery in DRX.

Table 5.5.5.2.5-1: NR Cell specific test parameters for EN-DC FR2 SSB-based beam failure detection and link recovery in DRX

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.9				
Assumption for UE beams[Note 10]			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-4	dB	13.7 [Note 11,12]	5.7 [Note 11,12]	-12	-12	-12
SNR_SSB of set q_1	Config 1-4	dB	0.2	0.2	20 [Note 12]	20 [Note 12]	20 [Note 12]
SSB_RP of set q_1	Config 1-2	dBm/ SCS kHz	-104.5	-104.5	-84.7	-84.7	-84.7
	Config 3-4		-101.5	-101.5	-81.7	-81.7	-81.7
N_{oc}	Config 1-4	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 5.5.5.2.4-1.
NOTE 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
NOTE 10: Information about types of UE beam is given in TS 38.133 clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband
Note 12: Including test tolerance given in Annex F.1.3.2

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 560+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

5.5.5.3 EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

5.5.5.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5.

5.5.5.3.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from release 15 and forward supporting CSI-RS-based RLM and link recovery.

5.5.5.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.5.3.

5.5.5.3.4 Test description

There are two cell configured in this test: E-UTRAN PCell and NR PSCell. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.5.3.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate CSI-RS based beam failure. Figure 5.5.5.3.4-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

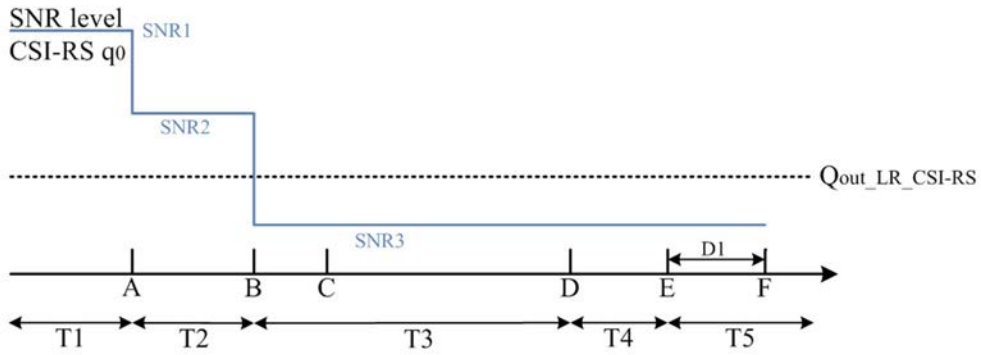

Figure 5.5.5.3.4-1: SNR variation for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

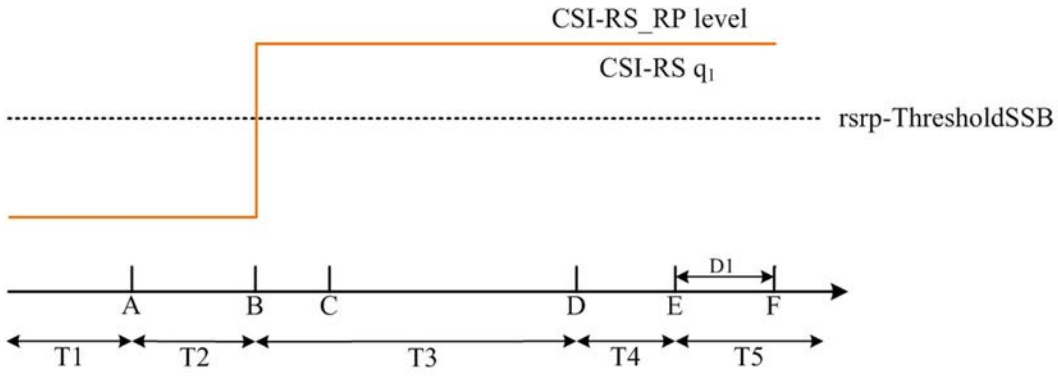

Figure 5.5.5.3.4-2: CSI-RS_RP level variation for EN-DC FR2 CSI-RS based beam failure detection and link recovery in non-DRX

5.5.5.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.5.3.4.1-1.

Table 5.5.5.3.4.1-1: Supported test configurations for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Configuration	Description
5.5.5.3-1	LTE FDD, NR TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
5.5.5.3-2	LTE TDD, NR TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 5.5.5.3.4.1-2.

Table 5.5.5.3.4.1-2: Initial conditions for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.5.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	

Parameter	Value	Comment
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 5.5.5.3.4.1-3. The NZP-CSI-RS configuration is according to Table 5.5.5.3.4.1-3.

2. Message contents are defined in clause 5.5.5.3.4.3.

3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.5.3.4.1-3: General test parameters for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-2		Cell 1	
E-UTRA RF Channel Number		1-2		1	
Active PCell		1-2		Cell 2	
RF Channel Number		1-2		2	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	Table A.1.5-3
$BW_{channel}$		1-2	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	Table A.8.1-1
DL dedicated BWP configuration		1-2		DLBWP.1.1	Table A.8.1-2
UL initial BWP configuration		1-2		ULBWP.0.1	Table A.8.2-1
UL dedicated BWP configuration		1-2		ULBWP.1.1	Table A.8.2-2
PDSCH Reference Channel		1-2		SR.3.2 TDD	Table A.1.1.2-3
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	Table A.1.2.2-3
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	Table A.1.3.2-3
OCNG parameters		1-2		OP.1	Table A.2.1-1
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	Table A.10.2-1
CSI-RS for tracking		1-2		TRS.2.1 TDD	Table A.1.4A.2.1-1
SSB Configuration		1-2		SSB.1 FR2	Table A.3.2-1
SMTC Configuration		1-2		SMTC.3	Table A.4-1
PRACH Configuration		1-2		PRACH.4 FR2	Table A.7.2-1
DRX configuration		1-2		OFF	
CSI-RS configuration for BFD/CBD/RLM		1-2		CSI-RS.3.2 TDD	Table A.1.4.2-3
CSI-RS index assigned as BFD RS (q_0)		1-2		0	
CSI-RS index assigned as CBD RS (q_1)		1-2		1	
CSI-RS index assigned as RLM RS		1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (TS 38.133 [6] Table 8.1.1-1).

rsrp-ThresholdSSB	1-2	dBm/SCS	-109[Note 2]	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-2		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer	1-2		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting	1-2		CSI-RS.3.1 TDD	Table A.1.4.2-3
reportConfigType	1-2		periodic	
reportQuantity	1-2		cri-RI-PMI-CQI	
CSI reporting periodicity	1-2	slot	40	
CSI reporting offset	1-2	slot	4	
T310	1-2	ms	1000	
N310	1-2		2	
T1	1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s	1.17	
T3	1-2	s	0.9	
T4	1-2	s	0	
T5	1-2	s	0.31	
D1	1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: Including test tolerance given in Annex F.1.3.2.				

5.5.5.3.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters of NR Cell 1 according to T1 in Table 5.5.5.3.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.5.3.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.5.3.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 5.5.5.3.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 5.5.5.3.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point B;

   and

   b) does not detect preamble on a beam associated with the candidate beam set q_1 before time point B; and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one. Otherwise the number of failed tests is increased by one.

8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 5.5.5.3.5-1.

9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.5.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.5.3.4.3-1: Common Exception messages for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with condition CSI-RS BFD Table H.3.1-10 with condition CSI-RS Table H.3.1-10A Table H.3.1-10B

Table 5.5.5.3.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 5.5.5.3.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 5.5.5.3.4.3-4: *NZP-CSI-RS-Resource*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-85			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
powerControlOffsetSS	db0		
}			

Table 5.5.5.3.4.3-5: *PDCCH-Config*

Derivation Path: TS 38.508-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	1 entry		
ControlResourceSet[1]	ControlResourceSet	entry 1, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 5.5.5.3.4.3-6: ControlResourceSet for BFR

Derivation Path: TS 38.508-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

5.5.5.3.5 Test requirement

Tables 5.5.5.3.4.1-3 and 5.5.5.3.5-1 define the primary level settings including test tolerances for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX.

Table 5.5.5.3.5-1: NR Cell specific test parameters for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.9				
Assumption for UE beams[Note 10]		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB					
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB	0				
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					

EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1-2	dB	13.7 Note 11,12	5.7 Note 11,12	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1-2	dB	0.2	0.2	20 Note 12	20 Note 12	20 Note 12
CSI-RS_RP of set q_1	Config 1-2	dBm/SCS	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	Config 1-2	dBm/120 KHz	TBD				
Propagation condition			TDL-A 30ns 75Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 4: Void
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
NOTE 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 5.5.5.3.4-1.
NOTE 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
NOTE 10: Information about types of UE beam is given in TS 38.133 clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband
Note 12: Including test tolerance given in Annex F.1.3.2

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

5.5.5.4 EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

5.5.5.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the

evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5.

5.5.5.4.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from release 15 and forward supporting CSI-RS-based RLM and long DRX cycle and link recovery.

5.5.5.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.5.4.

5.5.5.4.4 Test description

There is one E-UTRAN PCell and one NR PSCell configured in this test. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.5.4.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate CSI-RS based beam failure. Figure 5.5.5.4.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

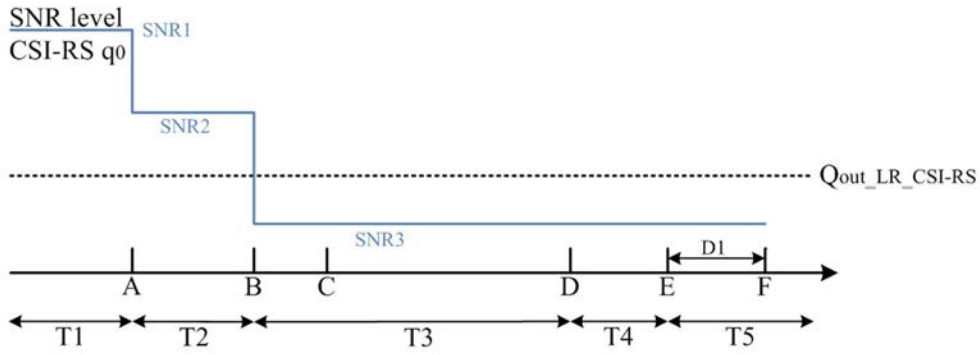

Figure 5.5.5.4.4-1: SNR variation for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX

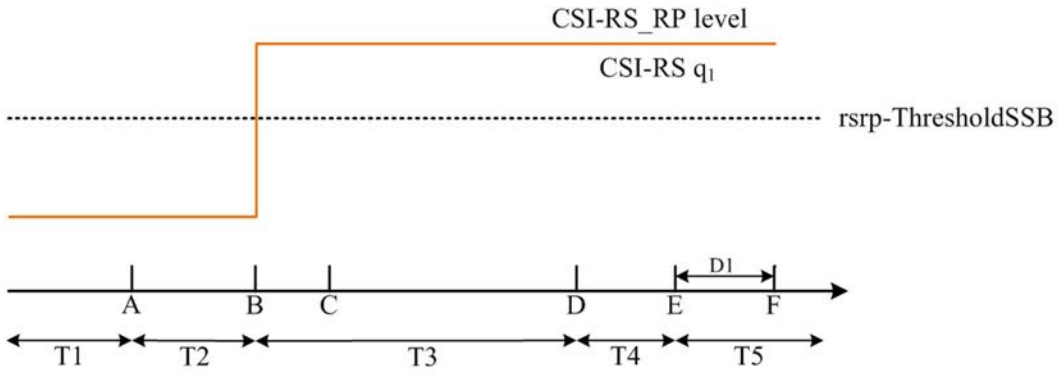

Figure 5.5.5.4.4-2: CSI-RS_RP level variation for EN-DC FR2 CSI-RS based beam failure detection and link recovery in DRX

5.5.5.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.5.4.4.1-1.

Table 5.5.5.4.4.1-1: Supported test configurations for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX

Configuration	Description
5.5.5.4-1	LTE FDD, NR TDD duplex mode, 120 kHz SSB SCS, 100MHz bandwidth
5.5.5.4-2	LTE TDD, NR TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 5.5.5.4.4.1-2.

Table 5.5.5.4.4.1-2: Initial conditions for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.5.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.5.4.4.1-3. The NZP-CSI-RS configuration is according to Table 5.5.5.4.4.1-3. The DRX configuration for is according to Table 5.5.5.4.4.1-3. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

2. Message contents are defined in clause 5.5.5.4.4.3.

3. There is one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.5.4.4.1-3: General test parameters for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active E-UTRA PCell	1-2		Cell 1	
E-UTRA RF Channel Number	1-2		1	
Active PCell	1-2		Cell 2	
RF Channel Number	1-2		2	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	Table A.1.5-3
$BW_{channel}$	1-2	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	Table A.8.1-1
DL dedicated BWP configuration	1-2		DLBWP.1.1	Table A.8.1-2
UL initial BWP configuration	1-2		ULBWP.0.1	Table A.8.2-1
UL dedicated BWP configuration	1-2		ULBWP.1.1	Table A.8.2-2
PDSCH Reference Channel	1-2		SR.3.2 TDD	Table A.1.1.2-3
RMSI CORESET Reference Channel	1-2		CR.3.1 TDD	Table A.1.2.2-3
Dedicated CORESET Reference Channel	1-2		CCR.3.1 TDD	Table A.1.3.2-3
OCNG parameters	1-2		OP.1	Table A.2.1-1
CP length	1-2		Normal	
PDSCH/PDCCH TCI state	1-2		TCI.State.0	Table A.10.2-1

CSI-RS for tracking		1-2		TRS.2.1 TDD	Table A.1.4A.2.1-1
SSB Configuration		1-2		SSB.1 FR2	Table A.3.2-1
SMTC Configuration		1-2		SMTC.3	Table A.4-1
PRACH Configuration		1-2		PRACH.4 FR2	Table A.7.2-1
DRX configuration		1-2		DRX.3	Table A.5-1
CSI-RS configuration for BFD/CBD/RLM		1-2		CSI-RS.3.2 TDD	Table A.1.4.2-3
CSI-RS index assigned as BFD RS (q_0)		1-2		0	
CSI-RS index assigned as CBD RS (q_1)		1-2		1	
CSI-RS index assigned as RLM RS		1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-109 Note 2	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	Table A.1.4.2-3
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	5.43	
T3		1-2	s	5.16	
T4		1-2	s	0	
T5		1-2	s	0.31	
D1		1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: Including test tolerance given in Annex F.1.3.2.					

Table 5.5.5.4.4.1-4: Void

5.5.5.4.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4

2. Set the parameters of NR Cell 1 according to T1 in Table 5.5.5.4.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.5.4.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.5.4.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 5.5.5.4.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 5.5.5.4.5-1. T5 starts.

7. If the SS:

a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point B; and

b) does not detect preamble on a beam associated with the candidate beam set q_1 before time point B; and

c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

the number of successful tests is increased by one. Otherwise the number of failed tests is increased by one.

8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 5.5.5.4.5-1.

9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.5.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.5.4.4.3-1: Common Exception messages for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with condition CSI-RS BFD Table H.3.1-10 with condition CSI-RS Table H.3.1-10A Table H.3.1-10B Table H.3.7-1 with condition DRX.3

Table 5.5.5.4.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		

aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 5.5.5.4.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 5.5.5.4.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.508-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	1 entry		
ControlResourceSet[1]	ControlResourceSet	entry 1, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 5.5.5.4.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.508-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

5.5.5.4.5 Test requirement

Tables 5.5.5.4.4.1-3 and 5.5.5.4.5-1 define the primary level settings including test tolerances for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX.

Table 5.5.5.4.5-1: NR Cell specific test parameters for EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.9				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1-2	dB	13.7 Note 11,12	5.7 Note 11,12	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1-2	dB	0.2	0.2	20 Note 12	20 Note 12	20 Note 12
CSI-RS_RP of set q_1	Config 1-2	dBm/SCS	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	Config 1-2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 4: Void
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 5.5.5.4.4-1.
NOTE 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
NOTE 10: Information about types of UE beam is given in TS 38.133 clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband
Note 12: Including test tolerance given in Annex F.1.3.2.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

5.5.5.5 EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

BFD RS configuration and test procedure require further analysis based on recent changes in TS38.133.

5.5.5.5.1 Test purpose

The purpose of this test is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used, and to verify the scheduling availability restriction requirements for SSB based beam failure detection and link recovery for an FR2 serving cell in TS 38.133 [6] clause 8.5.7 and 8.5.8.

5.5.5.5.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from release 15 onwards.

5.5.5.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.5.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.5.5.

5.5.5.5.4 Test description

There are two cell configured in this test. Cell 1 is the E-UTRAN PCell and Cell 2 is the PSCell. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.5.5.4-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB index 0 in the active PSCell to emulate SSB based beam failure. Figure 5.5.5.5.4-2 shows the variation of the downlink L1-RSRP of the SSB index 1 used for link recovery.

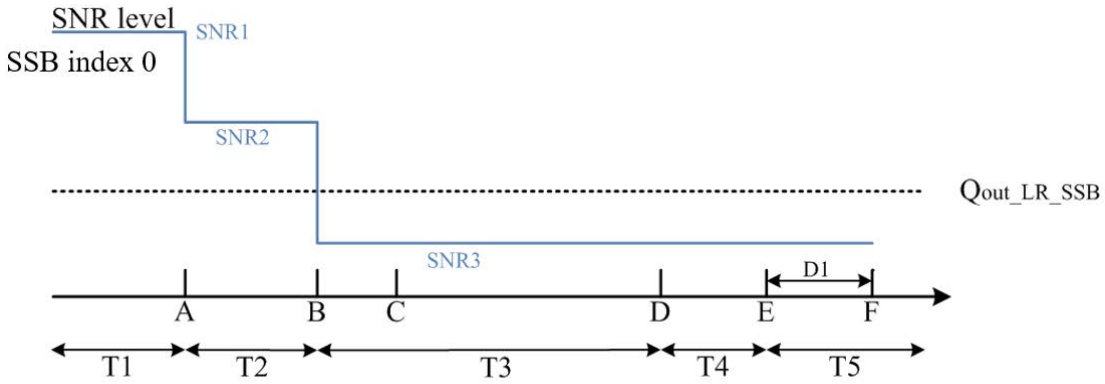

Figure 5.5.5.5.4-1: SNR variation for EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX

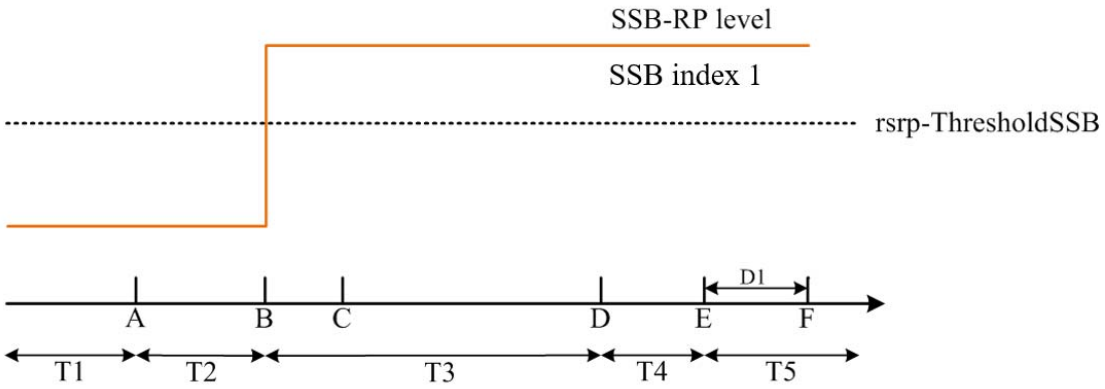

Figure 5.5.5.5.4-2: SSB_RP level variation for EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX

5.5.5.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.5.5.4.1-1.

Table 5.5.5.5.4.1-1: Supported test configurations for EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX

Configuration	Description
5.5.5.5-1	LTE FDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.5.5-2	LTE TDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.5.5-3	LTE FDD, NR 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.5.5.5-4	LTE TDD, NR 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.5.5.4.1-2.

Table 5.5.5.5.4.1-2: Initial conditions for EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.5.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.5.5.4.1-3.
2. Message contents are defined in clause 5.5.5.5.4.3.
3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.5.5.4.1-3: General test parameters for EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-4		Cell 1	
E-UTRA RF Channel Number		1-4		1	
Active PCell		1-4		Cell 2	
RF Channel Number		1-4		2	
Duplex mode		1-4		TDD	
TDD Configuration		1-4		TDDConf.3.1	Table A.1.5-3
$BW_{channel}$		1-4	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1-4		66	
PDSCH/PDCCH subcarrier spacing		1-4	kHz	120	
DL initial BWP configuration		1-4		DLBWP.0.1	Table A.8.1-1
DL dedicated BWP configuration		1-4		DLBWP.1.1	Table A.8.1-2
UL initial BWP configuration		1-4		ULBWP.0.1	Table A.8.2-1
UL dedicated BWP configuration		1-4		ULBWP.1.1	Table A.8.2-2
PDSCH Reference Channel		1-2		SR.3.2 TDD	Table A.1.1.2-3
		3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	Table A.1.2.2-3
		3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	Table A.1.3.2-3
		3-4		CCR.3.7 TDD	
OCNG parameters		1-4		OP.1	Table A.2.1-1
CP length		1-4		Normal	
PDSCH/PDCCH TCI state		1-4		TCI.State.0	Table A.10.2-1
CSI-RS for tracking		1-4		TRS.2.1 TDD	Table A.1.4A.2.1-1
SSB Configuration		1-2		SSB.1 FR2	Table A.3.2-1
		3-4		SSB.2 FR2	
SMTC Configuration		1-4		SMTC.1	Table A.4-1
PRACH Configuration		1-4		PRACH.2 FR2	Table A.7.2-1
DRX configuration		1-4		OFF	
Beam failure detection transmission parameters	DCI format	1-4		1-0	
	Number of Control OFDM symbols	1-4		2	
	Aggregation level	1-4	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-4	dB	0	
	DMRS precoder granularity	1-4		REG bundle size	
	REG bundle size	1-4		6	
Gap pattern ID		1-4		N/A	No measurement gap is configured
rlmInSyncOutOfSyncThreshold		1-4		absent	Value 0 is applied. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-109 Note 3	Threshold used for $Q_{in_LR_SSB}$
		3-4		-106 Note 3	
powerControlOffsetSS		1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-4		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1-4		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1-4		CSI-RS.3.1 TDD	Table A.1.4.2-3
reportConfigType		1-4		periodic	
reportQuantity		1-4		cri-RI-PMI-CQI	
CSI reporting periodicity		1-4	slot	40	

CSI reporting offset	1-4	slot	4	
T310	1-4	ms	1000	
N310	1-4		2	
T1	1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-4	s	2.6	
T3	1-4	s	1.64	
T4	1-4	s	0	
T5	1-4	s	1.01	
D1	1-4	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: Including test tolerance given in Annex F.1.3.2				

5.5.5.5.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. This test will focus on the scheduling availability during beam failure detection and candidate beam detection. In the test, DRX configuration is not enabled. During the test the UE is scheduled to transmit continuously in UL.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters of NR Cell 1 according to T1 in Table 5.5.5.5.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.5.5.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.5.5.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 5.5.5.5.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 5.5.5.5.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) which are not overlapped with SSBs configured for beam failure detection during the period from time point B to time point D; and

   b) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point D until T5 expires,

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 5.5.5.5.5-1.

9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.5.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with condition “Short_DCI” and with the following exceptions:

Table 5.5.5.5.4.3-1: Common Exception messages for EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with condition SSB BFD Table H.3.1-10 with condition SSB Table H.3.1-10A Table H.3.1-10B

Table 5.5.5.5.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 5.5.5.5.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 5.5.5.5.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.508-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	1 entry		
ControlResourceSet[1]	ControlResourceSet	entry 1, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			

searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 5.5.5.5.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.508-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
	1		Test Configuration 3 & 4
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

Table 5.5.5.5.4.3-6: PDCCH *Search Space* for USS

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	2		
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n1		
aggregationLevel4	n2		Test Configuration 1 & 2
	n1		Test Configuration 3 & 4
aggregationLevel8	n0		
}			
}			

5.5.5.5 Test requirement

Tables 5.5.5.5.4.1-3 and 5.5.5.5.5-1 define the primary level settings including test tolerances for EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX.

Table 5.5.5.5.5-1: NR Cell specific test parameters for EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A. 9.1				
Assumption for UE beams[Note 10]		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB					
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB	0				

EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SSB index assigned as BFD RS (q_0)	Config 1-4		0	0	Note 13		
SSB index assigned as CBD RS (q_1)	Config 1-4		1	1	1	1	1
SNR of SSB index 0	Config 1-4	dB	13.7 Note 11,12	5.7 Note 11,12	-12	-12	-12
SNR of SSB index 1	Config 1-4	dB	0.2	0.2	20 Note 12	20 Note 12	20 Note 12
SSB_RP of SSB index 1	Config 1-2	dBm/ SCS	-104.5	-104.5	-84.7	-84.7	-84.7
	Config 3-4		-101.5	-101.5	-81.7	-81.7	-81.7
N_{oc}	Config 1-4	dBm/120K Hz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
NOTE 4: Void
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 5.5.5.5.4-1.
NOTE 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
NOTE 10: Information about types of UE beam is given in TS 38.133 clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband
Note 12: Including test tolerance given in Annex F.1.3.2.
Note 13: BFD RS (q_0) is configured as SSB index 0 at the start of T3, and it is reconfigured by RRC as SSB index 1 after the UE transmits the preamble on a beam associated with the candidate beam set q_1

The UE behaviour during time duration T3 follows the requirements defined in TS 38.133 [6] clause 8.5.7.3:

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in TS 38.133 [6] clause 8.5.8.3:

The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

5.5.5.6 EN-DC FR2 CSI-RS-based BFD and LR for SCell in non-DRX

Editor's Note:

- This test case is incomplete for Test frequency f > 40.8 GHz
- This test case is incomplete for UE power class other than PC3.

5.5.5.6.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in TS 38.133 [6] clause 8.5.

5.5.5.6.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from release 16 onwards supporting SCell BFR.

5.5.5.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.5.0.2 and 5.5.5.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.5.6.

5.5.5.6.4 Test description

There are three cells configured in this test. Cell 1 is the E-UTRAN PCell, Cell 2 is the PSCell and Cell 3 is the SCell. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.5.6.4-1 shows the variation of the downlink SNR of the active SCell and the SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure 5.5.5.6.4-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

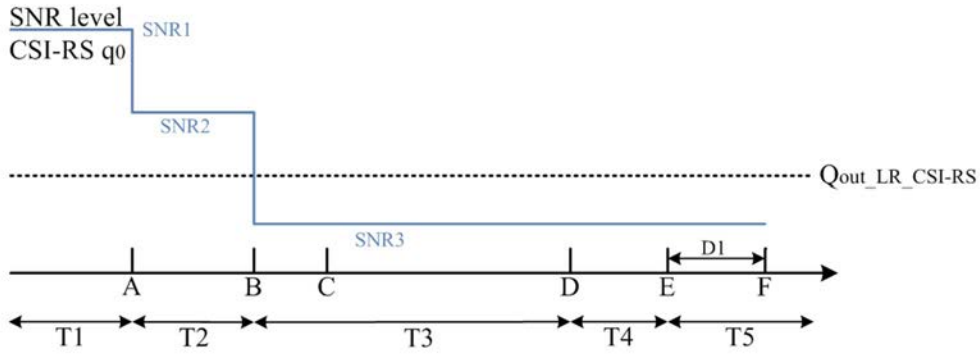

Figure 5.5.5.6.4-1: SNR variation for CSI-RS based beam failure detection and link recovery testing for SCell in non-DRX mode

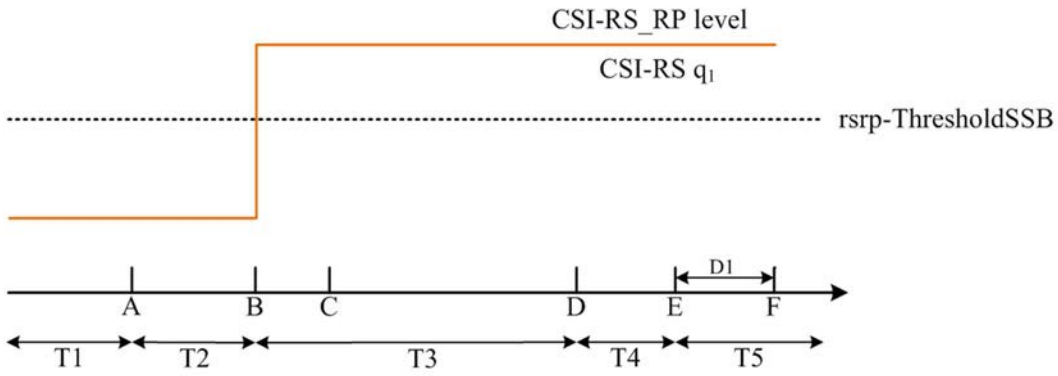

Figure 5.5.5.6.4-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in non-DRX mode

5.5.5.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.5.6.4.1-1.

Table 5.5.5.6.4.1-1: Supported test configurations for EN-DC FR2 SCell beam failure detection and link recovery testing in non-DRX

Configuration	Description
5.5.5.6-1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
5.5.5.6-2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.5.6.4.1-2.

Table 5.5.5.6.4.1-2: Initial conditions for EN-DC FR2 SCell beam failure detection and link recovery testing in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.5.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.5.6.4.1-3.
2. Message contents are defined in clause 5.5.5.6.4.3.
3. There are one E-UTRAN cell and two NR cells specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 5.5.5.6.4.1-3: General test parameters for FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active E-UTRA PCell	1-2		Cell 1	
E-UTRA RF Channel Number	1-2		1	
Active PCell	1-2		Cell 2	
RF Channel Number for PSCell	1-2		2	
Active SCell	1-2		Cell 3	
RF Channel Number for SCell	1-2		3	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
$BW_{channel}$	1-2	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	
DL dedicated BWP configuration	1-2		DLBWP.1.1	
UL initial BWP configuration	1-2		ULBWP.0.1	
UL dedicated BWP configuration	1-2		ULBWP.1.1	
PDSCH Reference Channel	1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel	1-2		CR.3.1 TDD	A.1.2.2
Dedicated CORESET Reference Channel	1-2		CCR.3.1 TDD	
OCNG parameters	1-2		OP.1	A.2.1
CP length	1-2		Normal	
PDSCH/PDCCH TCI state	1-2		TCI.State.0	
CSI-RS for tracking	1-2		TRS.2.1 TDD	
SSB Configuration	1-2		SSB.3 FR2	A.3

SMTC Configuration		1-2		SMTC.3	A.4
PRACH Configuration		1-2		FR2 PRACH configuration 4	Table A.7.2-1
DRX configuration		1-2		OFF	
CSI-RS configuration for BFD/CBD in activated SCell		1-2		CSI-RS.3.2 TDD	A.1.4.2
CSI-RS index assigned as BFD RS (q_0) in activated SCell		1-2		0	
CSI-RS index assigned as CBD RS (q_1) in activated SCell		1-2		1	
CSI-RS configuration for RLM in PSCell		1-2		CSI-RS.3.2 TDD	A.1.4.2
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
schedulingRequestID-BFR-SCell-r16		1-2		Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		1-2	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell		1-2	slot	4	
PUCCH parameters for SR configuration for BFR on SCell		1-2		Table 8.3.3.1.2-1 in [28]	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1 in TS 38.133 [6]).
rsrp-ThresholdSSB		1-2	dBm/SCS	-109 Note 2	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	A.1.4.2
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	1.17	
T3		1-2	s	0.9	
T4		1-2	s	0	
T5		1-2	s	0.31	
D1		1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: Including test tolerance given in Annex F.1.3.2					

5.5.5.6.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1, Cell 2 and Cell 3. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. During the test the UE is scheduled to transmit continuously in UL.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.
2. The SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 5.5.5.6.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.
3. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10).
4. Set the parameters of NR Cell 2 and Cell 3 according to T1 in Table 5.5.5.6.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.5.6.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.5.6.5-1. T3 starts.
7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 5.5.5.6.5-1. T4 starts.
8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 5.5.5.6.5-1. T5 starts.
9. If the SS:

   a) detects uplink power on NR in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect PUCCH with LRR before time point B, and

   c) detects PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.
10. When T5 expires the SS shall change the SNR value to T1 as specified in Table 5.5.5.6.5-1.
11. If the iteration fails, the SS shall first attempt to release and add the FR2 SCell. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration, and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.
12. Repeat steps 2-11 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.5.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.5.6.4.3-1: Common Exception messages for EN-DC FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-12 on Cell 3 Table H.3.1-13 on Cell 3

Table 5.5.5.6.4.3-2: MAC-CellGroupConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-68			
Information Element	**Value/remark**	**Comment**	**Condition**
MAC-CellGroupConfig ::= SEQUENCE {			
schedulingRequestID-BFR-SCell-r16	SchedulingRequestId		
}			

Table 5.5.5.6.4.3-3: *SchedulingRequestResourceConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-157			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
sl40	4		
}			
}			

5.5.5.6.5 Test requirement

Tables 5.5.5.6.4.1-3 and 5.5.5.6.5-1 define the primary level settings including test tolerances for EN-DC FR2 SCell for beam failure detection and link recovery testing in non-DRX.

Table 5.5.5.6.5-1: NR Cell specific test parameters for EN-DC FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Cell2	Cell3 Test 1				
			T1 to T5	T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.9.1	Setup 1 defined in A.9.1				
Assumption for UE beams[Note 10]			Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	13.7	5.7	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	0.2	20	20	20
CSI-RS_RP of set q_1	Config 1	dBm/SCS kHz	-104.5	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	Config 1	dBm/120kHz	-104.7	-104.7				
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 5.5.5.6.4-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
Note 10:	Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6], and does not limit UE implementation or test system implementation

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1. The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

5.5.5.7 EN-DC FR2 SCell CSI-RS-based beam failure detection and link recovery in DRX

Editor's Note: This test case is incomplete for Test frequency f > 40.8 GHz

- This test case is incomplete for UE power class other than PC3.

5.5.5.7.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in TS 38.133 [6] clause 8.5.

5.5.5.7.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from release 16 onwards supporting SCell BFR.

5.5.5.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.5.0.2 and 5.5.5.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.5.7.

5.5.5.7.4 Test description

There are three cells configured in this test. Cell 1 is the E-UTRAN PCell, Cell 2 is the PSCell and Cell 3 is the SCell. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.5.7.4-1 shows the variation of the downlink SNR of the active SCell and the SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure 5.5.5.7.4-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

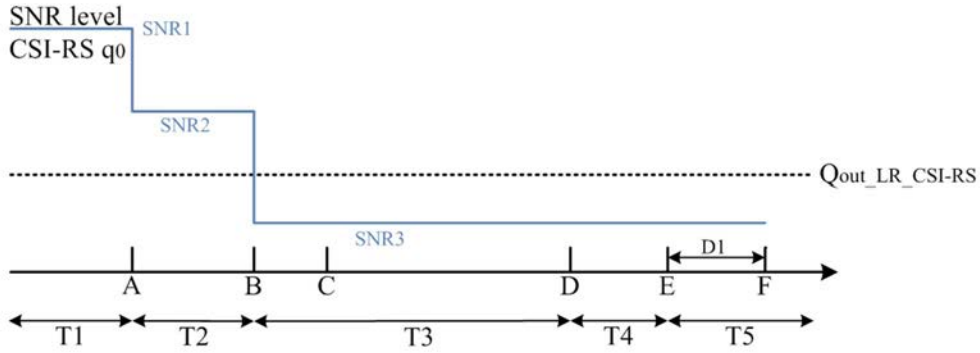

Figure 5.5.5.7.4-1: SNR variation for CSI-RS based beam failure detection and link recovery testing for SCell in DRX mode

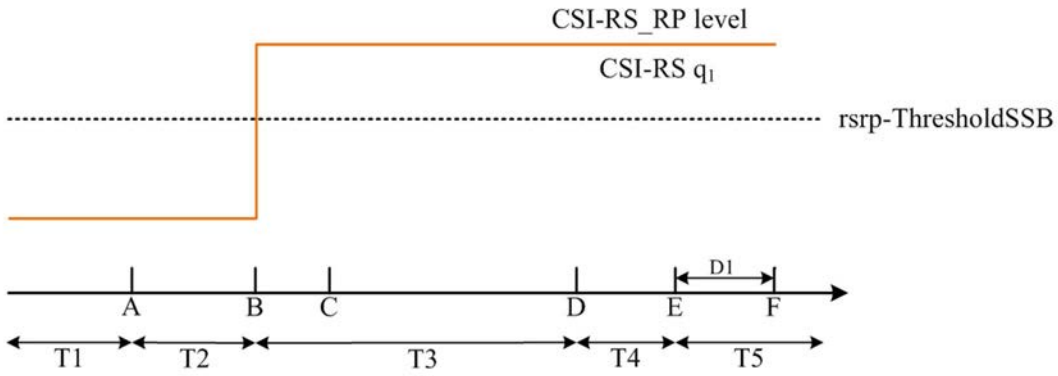

Figure 5.5.5.7.4-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in DRX mode

5.5.5.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.5.7.4.1-1.

Table 5.5.5.7.4.1-1: Supported test configurations for EN-DC FR2 SCell beam failure detection and link recovery testing in DRX

Configuration	Description
5.5.5.7-1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
5.5.5.7-2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.5.7.4.1-2.

Table 5.5.5.7.4.1-2: Initial conditions for EN-DC FR2 SCell beam failure detection and link recovery testing in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.5.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.5.7.4.1-3.
2. Message contents are defined in clause 5.5.5.7.4.3.
3. There are one E-UTRAN cell and two NR cells specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 5.5.5.7.4.1-3: General test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active E-UTRA PCell	1-2		Cell 1	
E-UTRA RF Channel Number	1-2		1	
Active PCell	1-2		Cell 2	
RF Channel Number for PSCell	1-2		2	
Active SCell	1-2		Cell 3	
RF Channel Number for SCell	1-2		3	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
$BW_{channel}$	1-2	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	
DL dedicated BWP configuration	1-2		DLBWP.1.1	
UL initial BWP configuration	1-2		ULBWP.0.1	
UL dedicated BWP configuration	1-2		ULBWP.1.1	
PDSCH Reference Channel	1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel	1-2		CR.3.1 TDD	A.1.2.2
Dedicated CORESET Reference Channel	1-2		CCR.3.1 TDD	
OCNG parameters	1-2		OP.1	A.2.1
CP length	1-2		Normal	
PDSCH/PDCCH TCI state	1-2		TCI.State.0	
CSI-RS for tracking	1-2		TRS.2.1 TDD	
SSB Configuration	1-2		SSB.3 FR2	A.3
SMTC Configuration	1-2		SMTC.3	A.4
PRACH Configuration	1-2		FR2 PRACH configuration 4	Table A.7.2-1
DRX configuration	1-2		DRX.3	A.5
CSI-RS configuration for BFD/CBD in activated SCell	1-2		CSI-RS.3.2 TDD	A.1.4.2
CSI-RS index assigned as BFD RS (q_0) in activated SCell	1-2		0	
CSI-RS index assigned as CBD RS (q_1) in activated SCell	1-2		1	
CSI-RS configuration for RLM in PSCell	1-2		CSI-RS.3.2 TDD	A.1.4.2

Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
schedulingRequestID-BFR-SCell-r16		1-2		Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		1-2	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell		1-2	slot	4	
PUCCH parameters for SR configuration for BFR on SCell		1-2		Table 8.3.3.1.2-1 in [28]	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1 in TS 38.133 [6]).
rsrp-ThresholdSSB		1-2	dBm/SCS	-109 Note 2	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	A.1.4.2
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	5.43	
T3		1-2	s	5.16	
T4		1-2	s	0	
T5		1-2	s	0.31	
D1		1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: Including test tolerance given in Annex F.1.3.2					

5.5.5.7.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1, Cell 2 and Cell 3. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test. During the test the UE is scheduled to transmit continuously in UL.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

2. The SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 5.5.5.7.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

3. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10).

4. Set the parameters of NR Cell 2 and Cell 3 according to T1 in Table 5.5.5.7.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.5.7.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 5.5.5.7.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 5.5.5.7.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 5.5.5.7.5-1. T5 starts.

9. If the SS:

   a) detects uplink power on NR carrier in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect PUCCH with LRR before time point B, and

   c) detects PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

10. When T5 expires the SS shall change the SNR value to T1 as specified in Table 5.5.5.7.5-1.

11. If the iteration fails, the SS shall first attempt to release and add the FR2 SCell. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration, and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

12. Repeat steps 2-11 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.5.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.5.7.4.3-1: Common Exception messages for EN-DC FR2 SCell for beam failure detection and link recovery testing in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-12 on Cell 3 Table H.3.1-13 on Cell 3 Table H.3.7-1 with condition DRX.3

Table 5.5.5.7.4.3-2: MAC-CellGroupConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-68			
Information Element	**Value/remark**	**Comment**	**Condition**
MAC-CellGroupConfig ::= SEQUENCE {			
schedulingRequestID-BFR-SCell-r16	SchedulingRequestId		
}			

Table 5.5.5.7.4.3-3: *SchedulingRequestResourceConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-157			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
sl40	4		
}			
}			

5.5.5.7.5 Test requirement

Tables 5.5.5.7.4.1-3 and 5.5.5.7.5-1 define the primary level settings including test tolerances for EN-DC FR2 SCell for beam failure detection and link recovery testing in DRX.

Table 5.5.5.7.5-1: NR Cell specific test parameters for EN-DC FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		**Unit**	**Cell2**	**Cell3 Test 1**				
			T1 to T5	**T1**	**T2**	**T3**	**T4**	**T5**
AoA setup			Setup 1 defined in A.9.1	Setup 1 defined in A.9.1				
Assumption for UE beams[Note 10]			Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	13.7	5.7	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	0.2	20	20	20
CSI-RS_RP of set q_1	Config 1	dBm/SCS kHz	-104.5	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	Config 1	dBm/120kHz	-104.7	-104.7				
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 5.5.5.7.4-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
Note 10:	Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6], and does not limit UE implementation or test system implementation

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1. The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

5.5.5.8 EN-DC FR2 CSI-RS-based PSCell TRP specific Beam Failure Detection and Link Recovery in DRX mode

Editor's Note: This test case is incomplete in following aspects:

- This test case is incomplete for Test frequency f > 40.8 GHz
- This test case is incomplete for UE power class other than PC3.
- TS 38.522 applicability spec update is pending

5.5.5.8.1 Test purpose

The purpose of this test is to verify that the UE properly detects the TRP specific CSI-RS-based beam failure in the set (q0,0), (q0,1) configured for a serving PSCell and a cell with PCID different from the serving cell, and that the UE performs correct CSI-RS-based link recovery based on beam candidate set (q1,0) and (q1,1). The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell with *schedulingRequestID-BFR-r17* configured, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5.

5.5.5.8.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from release 17 onwards supporting PSCell BFR.

5.5.5.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.5.0.2 and 5.5.5.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.5.8.

5.5.5.8.4 Test description

There are three cells, cell 1 is the E-UTRAN PCell, cell 2 is the PSCell and cell 3 is the cell with different PCID in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.5.8.4-1 shows the variation of the downlink SNR of the PSCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure 5.5.5.8.4-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

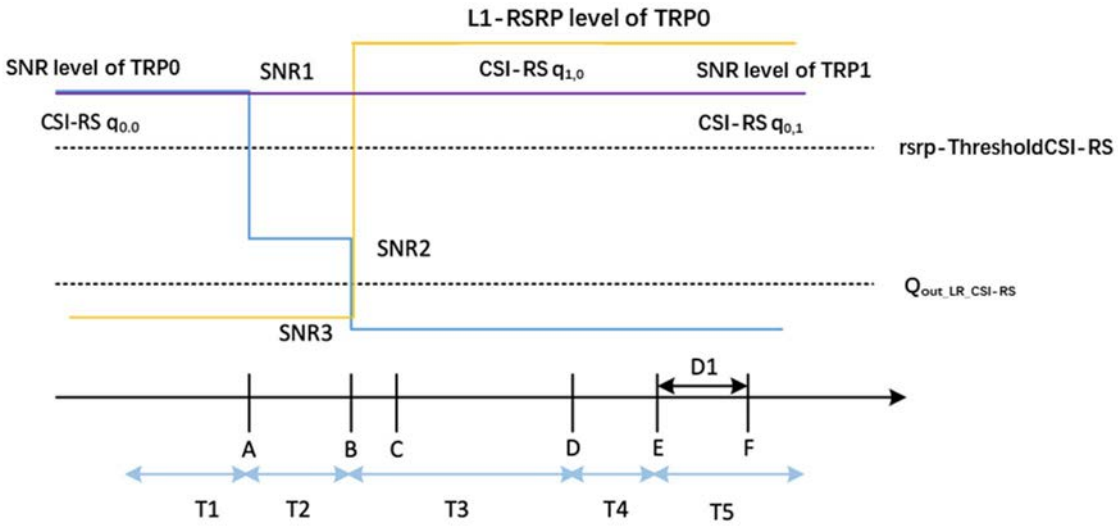

Figure 5.5.5.8.4-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

5.5.5.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.5.8.4.1-1.

Table 5.5.5.8.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 5.5.5.8.4.1-2.

Table 5.5.5.8.4.1-2: Initial conditions for EN-DC FR2 PSCell beam failure detection and link recovery testing in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.5.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.5.8.4.1-3.
2. Message contents are defined in clause 5.5.5.8.4.3.
3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 5.5.5.8.4.1-3: General test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-2		Cell 1	
E-UTRA RF Channel Number		1-2		1	
Active PSCell		1-2		Cell 2	
RF Channel Number		1-2		2	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	
$BW_{channel}$		1-2		100: $N_{RB,c}$ = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	A.1.2.2
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
OCNG parameters		1-2		OP.1	A.2.1
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.1 FR2	A.3
SMTC Configuration		1-2		SMTC.3	A.4
PRACH Configuration		1-2		FR2 PRACH configuration 4	Table A.7.2-1
DRX configuration		1-2		DRX.3	A.5
CSI-RS configuration for TRP0		1-2		CSI-RS.3.2 TDD	A.1.4.2
CSI-RS configuration for TRP1				CSI-RS.3.6 TDD	A.1.4.2
CSI-RS index assigned as BFD RS ($q_{0,0}$)		1-2		CSI-RS#0	
CSI-RS index assigned as CBD RS ($q_{1,0}$)		1-2		CSI-RS#1	
CSI-RS index assigned as BFD RS ($q_{0,1}$)		1-2		CSI-RS#2	
CSI-RS index assigned as CBD RS ($q_{1,1}$)		1-2		CSI-RS#3	
CSI-RS index assigned as RLM RS		1-2		0,1,2,3	A.1.4.2
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to	1-2	dB	0	

	average SSS RE energy				
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
schedulingRequestID-BFR- r17		1-2		Configured	
Periodicity of PUCCH for SR configuration for BFR on PSCell		1-2	slot	40	5ms
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1 in TS 38.133 [6]).
rsrp-ThresholdCSI-RS		1-2	dBm/SCS	-109 Note 2	Threshold used for $Q_{in_LR_CSI-RS}$
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	A.1.4.2
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	10.81	
T3		1-2	s	10.28	
T4		1-2	s	0	
T5		1-2	s	0.57	
D1		1-2	s	0.53	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

5.5.5.8.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

2. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

3. Set the parameters of NR Cell 2 according to T1 in Table 5.5.5.8.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

4. When T1 expires the SS shall change the SNR1 and SNR2 values to T2 as specified in Table 5.5.5.8.5-1. T2 starts.

5. When T2 expires the SS shall change the SNR1 and SNR2 values to T3 as specified in Table 5.5.5.8.5-1. T3 starts.

6. When T3 expires the SS shall change the SNR1 and SNR2 values to T4 as specified in Table 5.5.5.8.5-1. T4 starts.

7. When T4 expires the SS shall change the SNR1 and SNR2 values to T5 as specified in Table 5.5.5.8.5-1. T5 starts.

8. If the SS:

   a) detects uplink power on NR carrier in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect PUCCH with LRR before time point B, and

   c) detects PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_{10} and q_{11} before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

9. When T5 expires the SS shall change the SNR value to T1 as specified in Table 5.5.5.8.5-1.

10. If the iteration fails, the SS shall first attempt to release and add the FR2 PSCell. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration, and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.5.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.5.8.4.3-1: Common Exception messages for EN-DC FR2 PSCell for beam failure detection and link recovery testing in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8A with Condition CSI-RS BFD Table H.3.1-12A on Cell 2 Table H.3.1-13 on Cell 2 with condition SpCell Table H.3.7-1 with condition DRX.3

Table 5.5.5.8.4.3-2: *MAC-CellGroupConfig for R17 BFR*

Derivation Path: TS 38.508-1, Table 4.6.3-68			
Information Element	Value/remark	Comment	Condition
MAC-CellGroupConfig ::= SEQUENCE {			
schedulingRequestID-BFR-r17	Not present		
schedulingRequestID-BFR2-r17	Not present		

schedulingRequestConfig-v1700	SchedulingRequest-Config		
}			

Table 5.5.5.8.4.3-3: *SchedulingRequestResourceConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-157			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
sl40	4		
}			
}			

5.5.5.8.5 Test requirement

Tables 5.5.5.8.4.1-3 and 5.5.5.8.5-1 define the primary level settings including test tolerances for EN-DC FR2 PSCell for beam failure detection and link recovery testing in DRX.

Table 5.5.5.8.5-1: Cell specific test parameters for EN-DC FR2 PSCell for beam failure detection and link recovery testing in DRX mode

Parameter		**Unit**	**Test 1**				
			T1	**T2**	**T3**	**T4**	**T5**
AoA setup			Setup 1 defined in A.9.1				
Assumption for UE beams[Note 10]			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set $q_{0,0}$	Config 1-2	dB	13.7	5.7	-12	-12	-12
SNR_CSI-RS of set $q_{1,0}$	Config 1-2	dB	13.7	13.7	13.7	13.7	13.7
SNR_CSI-RS of set $q_{0,1}$	Config 1-2	dB	0.2	0.2	20	20	20
SNR_CSI-RS of set $q_{1,1}$	Config 1-2	dB	0.2	0.2	20	20	20
CSI-RS_RP of set $q_{1,0}$	Config 1-2	dBm/SCS	-104.5	-104.5	-84.7	-84.7	-84.7
CSI-RS_RP of set $q_{1,1}$	Config 1-2	dBm/SCS	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	Config 1-2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 5.5.5.8.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

5.5.5.9 EN-DC FR2 SSB-based beam failure detection and link recovery in DRX mode for UE fulfilling relaxed measurement criterion

Editor's Note: This test case is incomplete in following aspects:

- This test case is incomplete for Test frequency f > 40.8 GHz
- This test case is incomplete for UE power class other than PC3.
- RAN4 dependency: Test parameters have brackets.

5.5.5.9.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 clause 8.5.2.4 for UE fulfilling good serving cell quality criterion, if configured. *goodServingCellEvaluationBFD* [2] criterion is configured according to the parameters listed in Table 5.5.5.9.4.1-3.

5.5.5.9.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from release 17 onwards supporting long DRX cycle and supporting BFD relaxation criteria *bfd-Relaxation-r17*.

5.5.5.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.5.0.5.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.5.9.

5.5.5.9.4 Test description

There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 5.5.5.9.4-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSBs in set q_0 in the active PSCell to emulate SSB based beam failure. Figure 5.5.5.9.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

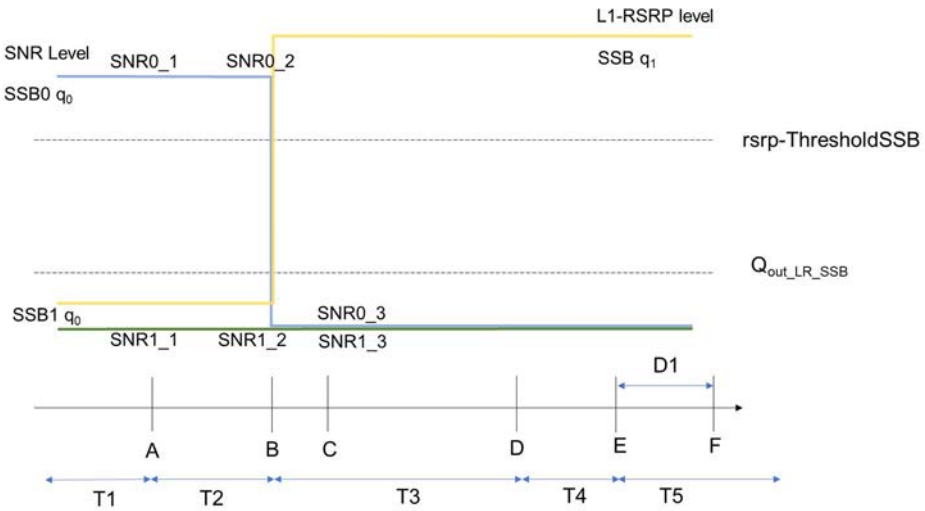

Figure 5.5.5.9.4-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in DRX mode for UE fulfilling relaxed measurement criterion

5.5.5.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.5.9.4.1-1.

Table 5.5.5.9.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
4	LTE TDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 5.5.5.9.4.1-2.

Table 5.5.5.9.4.1-2: Initial conditions for EN-DC FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.5.9.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.5.9.4.1-3.
2. Message contents are defined in clause 5.5.5.9.4.3.

3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table A.5.5.5.9.4.1-3: General test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-4		Cell 1	
E-UTRA RF Channel Number		1-4		1	
Active PCell		1-4		Cell 2	
RF Channel Number		1-4		2	
Duplex mode		1-4		TDD	
TDD Configuration		1-4		TDDConf.3.1	
$BW_{channel}$		1-4	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1-4		66	
PDSCH/PDCCH subcarrier spacing		1-4	kHz	120	
DL initial BWP configuration		1-4		DLBWP.0.1	
DL dedicated BWP configuration		1-4		DLBWP.1.1	
UL initial BWP configuration		1-4		ULBWP.0.1	
UL dedicated BWP configuration		1-4		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
		3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	
		3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
		3-4		CCR.3.7 TDD	
OCNG parameters		1-4		OP.1	
CP length		1-4		Normal	
PDSCH/PDCCH TCI state		1-4		TCI.State.0	
CSI-RS for tracking		1-4		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.1 FR2	
		3-4		SSB.2 FR2	
SMTC Configuration		1-4		SMTC.3	
PRACH Configuration		1-4		FR2 PRACH configuration 2	A.7.2-1
DRX configuration		1-4		DRX.3	A.5-1
SSB index assigned as BFD RS (q_0)		1-4		0,1	
SSB index assigned as CBD RS (q_1)		1-4		2	
SSB index assigned as RLM RS		1-4		0,2	
Beam failure detection transmission parameters	DCI format	1-4	1-0	1-0	
	Number of Control OFDM symbols	1-4		2	
	Aggregation level	1-4	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-4	dB	0	
	DMRS precoder granularity	1-4		REG bundle size	
	REG bundle size	1-4		6	
Gap pattern ID		1-4		N/A	
rlmInSyncOutOfSyncThreshold		1-4		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		3-4		-92	
powerControlOffsetSS		1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-4		n1	see TS 38.321 [7], clause 5.17

beamFailureDetectionTimer	1-4		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-4		CSI-RS.3.1 TDD	
reportConfigType	1-4		periodic	
reportQuantity	1-4		cri-RI-PMI-CQI	
CSI reporting periodicity	1-4	slot	40	
CSI reporting offset	1-4	slot	4	
T310	1-4	ms	1000	
N310	1-4		1	
T1	1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-4	s	[3.37]	
T3	1-4	s	[5.56]	
T4	1-4	s	0	
T5	1-4	s	0.61	
D1	1-4	s	0.57	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

5.5.5.9.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters of NR Cell 2 according to T1 in Table 5.5.5.9.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR1 and SNR2 values to T2 as specified in Table 5.5.5.9.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR1 and SNR2 values to T3 as specified in Table 5.5.5.9.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR1 and SNR2 values to T4 as specified in Table 5.5.5.9.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR1 and SNR2 values to T5 as specified in Table 5.5.5.9.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect preamble on a beam associated with the candidate beam set q_1 before time point B; and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one. Otherwise the number of failed tests is increased by one.

8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 5.5.5.9.5-1.

9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.5.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.5.9.4.3-1: Common Exception messages for EN-DC FR2 PSCell for beam failure detection and link recovery testing in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8A with Condition SSB BFD Table H.3.1-10 with condition SSB Table H.3.1-10A Table H.3.7-1 with condition DRX.3

Table 5.5.5.9.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 5.5.5.9.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n1		
}			

Table 5.5.5.9.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			

controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	1 entry		
ControlResourceSet[1]	ControlResourceSet	entry 1, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 5.5.5.9.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.508-1 [14], Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
	1		Test Configuration 3 & 4
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

5.5.5.9.5 Test requirement

Tables 5.5.5.9.4.1-3 and 5.5.5.9.5-1 define the primary level settings including test tolerances for EN-DC FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode.

Table 5.5.5.9.5-1: NR Cell specific test parameters for EN-DC FR2 SSB-based beam failure detection and link recovery in DRX

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams[Note 10]			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB0 of set q_0	Config 1-4	dB	14.70[Note 11]	14.70[Note 11]	-12	-12	-12
SNR_SSB1 of set q_0	Config 1-4	dB	-12	-12	-12	-12	-12
SNR_SSB of set q_1	Config 1-4	dB	0.2	0.2	20	20	20
SSB_RP of set q_1	Config 1-2	dBm/	-104.5	-104.5	-84.7	-84.7	-84.7

	Config 3-4	SCS	-101.5	-101.5	-81.7	-81.7	-81.7
N_{oc}	Config 1-4	dBm/120 KHz	-104.7				
goodServingCellEvaluation		dB	4				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR for SSB0 in time periods T1, T2, T3, T4 and T5 is denoted as SNR0_1, SNR0_2 and SNR0_3 respectively in figure A.5.5.5.9.1-1. The SNR for SSB1 in time periods T1, T2, T3, T4 and T5 is denoted as SNR1_1, SNR1_2 and SNR1_3 respectively in figure A.5.5.5.9.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 560+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

5.5.6 Active BWP switch delay

5.5.6.1 DCI-based and time-based active BWP switch

5.5.6.1.0 Minimum conformance requirements

FFS

5.5.6.1.1 EN-DC FR2 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Test tolerance analysis is missing

- Message contents are TBD

- Cell mapping is TBD

- Test procedure is TBD

- Test applicability needs to be added to TS 38.522

5.5.6.1.1.1 Test purpose

FFS

5.5.6.1.1.2 Test applicability

FFS

5.5.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.6.1.1.

5.5.6.1.1.4 Test description

5.5.6.1.1.4.1 Initial conditions

FFS

5.5.6.1.1.4.2 Test procedure

FFS

5.5.6.1.1.4.3 Message contents

FFS

5.5.6.1.1.5 Test requirements

FFS

5.5.6.1.2 EN-DC FR2 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Test tolerance analysis is missing

- Message contents are TBD

- Cell mapping is TBD

- Test procedure is TBD

- Test applicability needs to be added to TS 38.522

- Testability or LTE requirements in uncalibrated link is still FFS.

5.5.6.1.2.1 Test purpose

FFS

5.5.6.1.2.2 Test applicability

FFS

5.5.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.6.1.2.

5.5.6.1.2.4 Test description

5.5.6.1.2.4.1 Initial conditions

FFS

5.5.6.1.2.4.2 Test procedure

FFS

5.5.6.1.2.4.3 Message contents

FFS

5.5.6.1.2.5 Test requirements

FFS

5.5.6.2 RRC-based active BWP switch

The requirements in this clause apply for a UE configured with more than one BWP on PSCell or any activated SCell in SCG in EN-DC. UE shall complete the switch of active DL and/or UL BWP within the delay defined in this clause.

5.5.6.2.0 Minimum conformance requirements

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with one or more than one BWP configuration(s) configured, with

- Active BWP switch or parameter change of its active BWPs for SpCell
- Parameter change of its active BWPs except parameter *firstActiveDownlinkBWP-Id* and *firstActiveUplinkBWP-Id* for SCell

For RRC-based BWP switch, after the UE receives BWP switching request, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after the beginning of DL slot n + $\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$NR\ Slot\ length$ is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in millisecond as defined in clause 11.2 in TS 36.331 [29] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [2], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

5.5.6.2.1 EN-DC FR2 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.5.6.2.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 5.5.6.2.0.1. Supported test configurations are shown in Table 5.5.6.2.1.4.1-1.

5.5.6.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC and BWP adaptation of at least 2 BWPs.

5.5.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.6.2.1.

5.5.6.2.1.4 Test description

5.5.6.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2 [18].

This test shall be tested using any of the test configurations in Table 5.5.6.2.1.4.1-1.

Table 5.5.6.2.1.4.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.6.2.1.4.1-2

Table 5.5.6.2.1.4.1-2: Initial conditions for EN-DC FR2 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.6.2.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.5.6.2.1.4.3.

2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. Cell 2 is NR FR2 PSCell. The connection setup is done according to the settings in Annex C.1.1, and the downlink signal levels as per Annex C.1.2.

3. The test parameters are given in Table 5.5.6.2.1.4.1-3 below.

Table 5.5.6.2.1.4.1-3: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
PDCCH and PDSCH maximum number of HARQ transmission		1	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	0.2	

5.5.6.2.1.4.2 Test procedure

The test consists of two cells, a single E-UTRA cell (PCell), and a single NR cell (PSCell). Prior to the start of the test, the UE shall be fully synchronized to PSCell. The UE shall be configured for parameters as mentioned in the Table 5.5.6.2.1.4.1-3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [6] clause 5.5.

2. PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and PSCell (Cell 2) throughout the test procedure to ensure that the UE will have ACK/NACK sending.

3. The SS shall send an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures another UE-specific bandwidth part, BWP-1, and indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to the initial condition of Active BWP-1 in Table 5.5.6.2.1.5-1 and Table 5.5.6.2.1.4.3-2.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. Before the test starts UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).

6. Before the test starts UE has bandwidth part BWP-1 in its RRC-configuration for Cell 2 (PSCell).

7. Before the test starts UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.

8. Ensure all cells have constant signal levels throughout the test.

9. The test consists of 1 time period, with duration of T1.

10. Time period T1 starts when a *RRCConnectionReconfiguration* with updated bandwidth part configuration for active BWP-1, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part corresponding to the final condition of active BWP-1, according to Table 5.5.6.2.1.5-1 and Table 5.5.6.2.1.4.3-2.

11. If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of DL slot i+208+k_1 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

12. After the SS receives the ACK/NACK in step 11, or when T1 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

13. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 3, step 10, step 12 or step 13 fails, switch off and on the UE and go to step 1.

14. Repeat steps 2-13 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.6.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.6.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Table 5.5.6.2.1.4.3-2: *RRCReconfiguration* (Step 3 and Step 10)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 5.5.6.2.1.4.3-3	
}			
}			
}			

Table 5.5.6.2.1.4.3-3: *CellGroupConfig* (configured in Table 5.5.6.2.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 5.5.6.2.1.4.3-4	
}			
}			

Table 5.5.6.2.1.4.3-4: *ServingCellConfig* (configured in Table 5.5.6.2.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			

release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1] SEQUENCE {	BWP-Downlink	entry 1 Table 5.5.6.2.1.4.3-5	
}			
firstActiveDownlinkBWP-Id	1	BWP-1	
defaultDownlinkBWP-Id	1	BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 5.5.6.2.1.4.3-6	
}			
firstActiveUplinkBWP-Id	1	BWP-1	
}			
}			

Table 5.5.6.2.1.4.3-5: *BWP-Downlink* (configured in Table 5.5.6.2.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 10
}			
}			

Table 5.5.6.2.1.4.3-6: *BWP-Uplink* (configured in Table 5.5.6.2.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 10
}			
}			

5.5.6.2.1.5 Test requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell from the first DL slot that occurs right after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PSCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{\text{NR Slot length}} + k_1$, where,

$T_{RRCprocessingDelay}$ = 20 ms, is the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [29];

$T_{BWPSwitchDelayRRC}$ = 6 ms, is the time used by the UE to perform BWP switch;

NR slot length = 0.125 ms for SCS = 120 kHz.

k_1 is the timing between DL data receiving and acknowledgement as specified in [12].

Which gives $\frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{\text{NR Slot length}} = 208$ slots.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

Table 5.5.6.2.1.5-1: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66
Active BWP ID			1
Initial DL BWP Configuration			DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1
PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].

Table 5.5.6.2.1.5-2: OTA related test parameters for BWP switching test case

Parameter		Unit	Cell 2
Angle of arrival configuration			According to table A. 9
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note3	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		

NOTE 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

5.5.6.3 Simultaneous DCI-based and timer-based active BWP switch on multiple CCs

5.5.6.3.0 Minimum conformance requirements

5.5.6.3.0.1 Minimum conformance requirements for simultaneous DCI-based and timer-based active BWP switch on multiple CCs

5.5.6.3.0.1.1 Minimum conformance requirements for simultaneous DCI-based active BWP switch on multiple CCs

[TS 38.133, Clause 8.6.2A.1]

The delay requirements for simultaneous DCI based BWP switch on multiple CCs in this clause apply only if the timing difference among the first symbol of slot carrying DCI for all CCs is received within the MRTD for inter-band CA as defined in clause 7.6.4 in TS 38.133 [6].

For DCI-based BWP switch on multiple CCs, after the UE receives BWP switching request, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n, where slot n is slot which UE receives the earliest BWP switching request among CCs on which UE is performing simultaneous DCI-based BWP switching.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths on any serving cell.

UE shall finish BWP switch within the time duration $T_{MultipleBWPswitchDelay} + Y$, which is defined as:

$$T_{MultipleBWPswitchDelay} = T_{BWPswitchDelay} + D*(N-1)$$

Where:

- $T_{BWPswitchDelay}$ is the BWP switching delay on single CC defined in Table 4.6.6.0.1.1-1 depending on UE capability *bwp-SwitchingDelay* (TS 38.331 [13]). $T_{BWPswitchDelay}$ shall be based on the smallest SCS among SCS of all involved CCs before and after BWP switch. If the BWP switch on multiple CCs results in the change of the SCS on any CC among involved CCs, $T_{BWPswitchDelay}$ shall be based on the smallest SCS among all SCS values of all involved CCs.

- D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability *bwp-SwitchingMultiCCs-r16* (TS 38.306, [11]) for switching between non-dormant BWPs, and *bwp-SwitchingMultiDormancyCCs-r16* for switching between non-dormant and dormant BWPs.

- For UE which is capable of per-FR gap, and no BWP switch involves SCS change, N is the number of CCs in same FR; For UE which is not capable of per-FR gap, or the BWP switches on any CC involves SCS changing, N is the number of CCs undergoing simultaneous BWP switch.

- Y=0, if the serving cell where UE receives DCI for BWP switch is same as the serving cell on which BWP switch occurs for each involved serving cell.

  Y equals to the length of one slot at smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change,

- if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. If both scheduling cell and scheduled cell are in FR2-2, Y shall follow the SCS of 120 KHz.

Table 4.6.6.0.1.1-1: BWP switch delay

μ	NR Slot length	BWP switch delay $T_{BWPswitchDelay}$ (slots)

	(ms)	Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5
2	0.25	3	9
3	0.125	6	18
5	0.03125	20	65
6	0.015625	39	129
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

If the BWP switch is triggered on multiple CCs simultaneously within or outside DRX active time, and one of the two BWPs on each CC in a BWP switching is a dormant BWP (TS 38.321, [12]), UE shall be able to complete active BWP switching within the time duration of

- $T_{DormantMultipleBWPswitchDelay} = T_{MultipleBWPswitchDelay}+X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, or

- $T_{DormantMultipleBWPswitchDelay} = T_{MultipleBWPswitchDelay} +X+Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where

- $T_{MultipleBWPswitchDelay}$ is defined above corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs

- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs. If both scheduling cell and scheduled cell are in FR2-2, X shall follow the SCS of 120 KHz.

- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where DCI for dormancy indication is received.

The number of CCs, N, on which the UE can simultaneously switch BWPs while still meeting the requirements, if any, related to allocations on downlink, uplink, or transmission of HARQ-ACK, depends on the UE reported capabilities related to BWP switching, the network configuration and the BWP switch method.

5.5.6.3.0.1.2 Minimum conformance requirements for simultaneous timer-based active BWP switch on multiple CCs

[TS 38.133, Clause 8.6.2B.1]

The delay requirements for simultaneous timer-based BWP switch on multiple CCs in this clause apply only if the timing difference among the beginning of the slot where timer-based BWP switching starts for all CCs is within the MRTD for inter-band CA as defined in clause 7.6.4 in TS 38.133 [6].

For timer-based BWP switch on multiple CCs, UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (in FR1) or DL half-subframe ((in FR2) immediately after the earliest BWP-inactivity timer *bwp-InactivityTimer* (TS 38.331 [13]) expiration occurs on multiple serving cells, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n, where $T_{MultipleBWPswitchDelay}$ is defined in 4.6.6.0.1.1.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{MultipleBWPswitchDelay}$ after *bwp-InactivityTimer* (TS 38.331 [13]) expires on the cell where timer-based BWP switch occurs.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

5.5.6.3.1 E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs in synchronous EN-DC

Editor's Note: This test case is incomplete in following aspects:

- Test procedure is missing
- Message contents are missing

5.5.6.3.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch on multiple CCs delay requirement defined in clause 8.6 in TS 38.133 [6].

5.5.6.3.1.2 Test applicability

This test applies to all types of EN-DC UE Rel-16 and forward supporting EN-DC with PSCell in FR2, and supporting bwp-SwitchingMultiCCs-r16, either type1-r16 or type2-r16, as well as the corresponding r15 BWP switch capabilities from legacy tests (support of at least 2 active BWPs).

5.5.6.3.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 5.5.6.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.6.3.1.

5.5.6.3.1.4 Test description

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) and one NR SCell (Cell 3).

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and Cell 3 and the time duration of T2.

5.5.6.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.6.3.1.4.1-1.

Table 5.5.6.3.1.4.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.6.3.1.4.1-2.

Table 5.5.6.3.1.4.1-2: Initial conditions for EN-DC PSCell FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.6.3.1.4.1-3. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 in TS 38.133 [6], cell-specific parameters of NR PSCell are specified in Table 5.5.6.3.1.5-1.

2. Message contents are defined in clause 5.5.6.3.1.4.3.

3. There are one E-UTRAN cell and two NR cells specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.6.3.1.4.1-3: General test parameters for UE specific CBW change in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test for PSCell and SCell
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	For both PCell, PSCell and SCell
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to Cell1	µs	3	Synchronous EN-DC

Cell3 timing offset to Cell2	µs	0	Synchronous Cells
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

5.5.6.3.1.4.2 Test procedure

TBD

5.5.6.3.1.4.3 Message contents

TBD

5.5.6.3.1.5 Test requirement

Table 5.5.6.3.1.5-1 defines the NR cell specific test parameters. Table 5.5.6.3.1.5-2 defines OTA related test parameters.

5.5.6.3.1.5-1: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Frequency Range		FR2	FR2
Duplex mode		TDD	TDD
TDD configuration		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66	100 MHz: $N_{RB,c}$ = 66
Active BWP ID		1, 2	1, 2
Initial DL BWP Configuration		DLBWP.0.2 Note 2	DLBWP.0.2 Note 2
Active DL BWP-1 Configuration		DLBWP.1.1 Note 2	DLBWP.1.1 Note 2
Active DL BWP-2 Configuration		DLBWP.1.3 Note 2	DLBWP.1.3 Note 2
Initial UL BWP Configuration		ULBWP.0.2 Note 2	ULBWP.0.2 Note 2
Active UL BWP-1 Configuration		ULBWP.1.1 Note 2	ULBWP.1.1 Note 2
Active UL BWP-2 Configuration		ULBWP.1.3 Note 2	ULBWP.1.3 Note 2
PDSCH Reference measurement channel		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD	CCR.3.1 TDD
OCNG Patterns		OP.1	OP.1
SSB Configuration		SSB.1 FR2	SSB.1 FR2
SMTC Configuration		SMTC.1	SMTC.1
TCI State		TCI.State.0	TCI.State.0
TRS Configuration		TRS.2.1 TDD	TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS (Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation Condition		AWGN	AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].

Table 5.5.6.3.1.5-2: OTA related test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1 in TS 38.133 [6]	Setup 1 according to clause A.3.15.1 in TS 38.133 [6]
Assumption for UE beams Note 6		Fine	Fine
N_{oc} Note 1	dBm/15 kHz	-112	-112
N_{oc} Note 1	dBm/SCS	-103	-103
SS-RSRP Note 2	dBm/120 kHz Note3	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
Io Note2	dBm/95.04 MHz Note4	-56	-56

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6], and does not limit UE implementation or test system implementation

During T1, the UE shall start to send the ACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{MultipleBWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{MultipleBWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in TS 38.321 [12].

Depending on UE capability *bwp-SwitchingDelay* and *bwp-SwitchingMultiCCs-r16* in TS 38.331 [13], UE shall finish BWP switch within the time duration $T_{MultipleBWPswitchDelay}$ defined in TS 38.133 clause 8.6.2A and 8.6.2B.

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot ($i+Y1$), ($j+Y2$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

5.5.6.4 SCell dormancy switch

5.5.6.4.0 Minimum conformance requirements

5.5.6.4.0.1 Minimum conformance requirements for interruptions due to SCell dormancy switch

[TS38.133, Clause 8.2.1.2.15.1]

When one SCell in SCG is switched from dormancy to non-dormancy or from non-dormancy to dormancy (TS 38.321 [12]) when UE is in DRX active time,

- the UE is allowed an interruption on active serving cell in SCG as defined in clause 8.2.1.2.7 in TS 38 133, except that the interruption is allowed regardless of which parameters change between the dormant BWP and the non-dormant BWP.

- The starting time of interruption shall be within the dormancy switching delay as defined in clause 8.6.2 in TS 38 133.

When multiple SCells in SCG are switched from dormancy to non-dormancy or vice versa when the UE is in DRX active time, the interruption requirement described above applies for each BWP switch.

5.5.6.4.0.2 Minimum conformance requirements for interruptions due to CQI measurements during SCell dormancy

[TS38.133, Clause 8.2.1.2.15.2]

When one or more SCells are in dormancy, the UE is for the purpose of CQI measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements on dormant SCells shall not exceed 0.5%.

5.5.6.4.0.3 Minimum conformance requirements for interruptions due to RRM measurements during SCell dormancy

[TS38.133, Clause 8.2.1.2.15.3]

When one or more SCells are in dormancy, the UE is for the purpose of RRM measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements on dormant SCells shall not exceed 1.0%.

5.5.6.4.0.4 Minimum conformance requirements for DCI and timer-based BWP switch delay on a single CC

[TS38.133, Clause 8.6.2]

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with more than one BWP configurations configured.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ + Y which starts from the beginning of DL slot n, where

- Y=0, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.

- Y equals to the length of 1 slot, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. In this scenario, $T_{BWPswitchDelay}$ + Y shall follow the smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change. If both scheduling cell and scheduled cell are in FR2-2, Y shall follow the SCS of 120 KHz.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (FR1) or DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* (TS 38.331 [13]) expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* (TS 38.331 [13]) expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* (TS 38.331 [13]), UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 5.5.6.4.0.4-1.

Table 5.5.6.4.0.4-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5
2	0.25	3	9
3	0.125	6	18
5	0.03125	20	65
6	0.015625	39	129
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

If the BWP switch is triggered within or outside DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP (TS 38.321 [12]), UE shall be able to complete active BWP switching within the time duration of

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, or
- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where
- $T_{BWPswitchDelay}$ is defined in Table 5.5.6.4.0.4-1 corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.
- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs. If both scheduling cell and scheduled cell are in FR2-2, X shall follow the SCS of 120 KHz.
- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where UE receives dormancy indication.

For DCI-based BWP switch, if the new BWP is a dormant BWP, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive CSI-RS (for DL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL slot occurs right after a time duration of $T_{dormantBWPswitchDelay}$ which starts from the beginning of DL slot n.

5.5.6.4.0.5 Minimum conformance requirements for simultaneous DCI based BWP switch delay on multiple CCs

[TS38.133, Clause 8.6.2A.1]

The delay requirements for simultaneous DCI based BWP switch on multiple CCs in this clause apply only if the timing difference among the first symbol of slot carrying DCI for all CCs is received within the MRTD for inter-band CA as defined in clause 7.6.4 in TS 38.133 [6].

For DCI-based BWP switch on multiple CCs, after the UE receives BWP switching request, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n, where slot n is slot which UE receives the earliest BWP switching request among CCs on which UE is performing simultaneous DCI-based BWP switching.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths on any serving cell.

UE shall finish BWP switch within the time duration $T_{MultipleBWPswitchDelay} + Y$, which is defined as:

$$T_{MultipleBWPswitchDelay} = T_{BWPswitchDelay} + D*(N-1)$$

Where:

- $T_{BWPswitchDelay}$ is the BWP switching delay on single CC defined in Table 8.6.2-1 depending on UE capability *bwp-SwitchingDelay* [13]. $T_{BWPswitchDelay}$ shall be based on the smallest SCS among SCS of all involved CCs before and after BWP switch. If the BWP switch on multiple CCs results in the change of the SCS on any CC among involved CCs, $T_{BWPswitchDelay}$ shall be based on the smallest SCS among all SCS values of all involved CCs.

- D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability *bwp-SwitchingMultiCCs-r16* (TS 38.306 [11]) for switching between non-dormant BWPs, and *bwp-SwitchingMultiDormancyCCs-r16* for switching between non-dormant and dormant BWPs.

- For UE which is capable of per-FR gap, and no BWP switch involves SCS change, N is the number of CCs in same FR; For UE which is not capable of per-FR gap, or the BWP switches on any CC involves SCS changing, N is the number of CCs undergoing simultaneous BWP switch.

- Y=0, if the serving cell where UE receives DCI for BWP switch is same as the serving cell on which BWP switch occurs for each involved serving cell.

  Y equals to the length of one slot at smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change,

- if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. If both scheduling cell and scheduled cell are in FR2-2, Y shall follow the SCS of 120 KHz.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

If the BWP switch is triggered on multiple CCs simultaneously within or outside DRX active time, and one of the two BWPs on each CC in a BWP switching is a dormant BWP (TS 38.321 [12]), UE shall be able to complete active BWP switching within the time duration of

- $T_{DormantMultipleBWPswitchDelay} = T_{MultipleBWPswitchDelay}+X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, or

- $T_{DormantMultipleBWPswitchDelay} = T_{MultipleBWPswitchDelay} +X+Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where

- $T_{MultipleBWPswitchDelay}$ is defined above corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.

- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs. If both scheduling cell and scheduled cell are in FR2-2, X shall follow the SCS of 120 KHz.

- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where DCI for dormancy indication is received.

The number of CCs, N, on which the UE can simultaneously switch BWPs while still meeting the requirements, if any, related to allocations on downlink, uplink, or transmission of HARQ-ACK, depends on the UE reported capabilities related to BWP switching, the network configuration and the BWP switch method.

5.5.6.4.0.6 Minimum conformance requirements for interruptions due to NR SCell dormancy switch

[TS36.133, Clause 7.32.2.14.1]

When one NR SCell in SGC is switched from dormancy to non-dormancy or from non-dormancy to dormancy (TS 38.321 [12]) when UE is in DRX active time in SCG,

- the UE is allowed an interruption on any active serving cell in MCG as defined in clause 7.32.2.7 in TS 36.133, except that the interruption is allowed regardless of which parameters change between the dormant BWP and the non-dormant BWP.

- If the UE is not capable of per-FR gap, or if the dormancy switching involves SCS changing, the interruption is allowed to active serving cell in MCG regardless of the frequency range of the NR SCell on which the dormancy switching occurs. If the UE is capable of per-FR gap and the dormancy switching does not involve SCS changing, UE is allowed to cause interruption to active serving cells in MCG provided that the NR SCell on which the dormancy switching occurs belongs to FR1.

- The starting time of interruption is only allowed within the dormancy switching delay as defined in clause 8.6.2 in TS 38.133 [6].

When more than one NR SCells in SGC are switched from dormancy to non-dormancy or from non-dormancy to dormancy [12] simultaneously when UE is in DRX active time in SCG, the interruption requirements described above apply for dormancy switch on each SCell in SCG.

5.5.6.4.0.7 Minimum conformance requirements for interruptions due to CSI and RRM measurements during SCell dormancy

[TS36.133, Clause 7.32.2.14.2]

When one or more NR SCells in SCG are in dormancy, the UE is allowed to cause interruptions on active E-UTRA serving cells due to CSI and RRM measurements on the NR SCell(s) in dormancy.

The rate of ACK/NACK feedback loss on any active E-UTRA serving cell resulting from CSI and RRM measurements on NR SCells in dormancy shall not exceed 0.5% and 1.0%, respectively.

5.5.6.4.1 E-UTRAN – NR FR2 PSCell SCell dormancy switch of single FR2 Scell inside active time

Editor's Note: This test case is incomplete in following aspects:

- Test procedure is missing
- Message contents are missing

5.5.6.4.1.1 Test purpose

The purpose of this test is to verify

1. the interruption due to RRM and CSI measurement during Scell dormancy on spCell is within the limits specified in clause 8.2.1.2.15.2 and 8.2.1.2.15.3 in TS 38.133 [6] for NR victim cell, and
2. the Scell dormancy switch delay is within the requirement defined in clause 8.6.2 in TS 38.133 [6], and the Scell dormancy switch interruption is within the limits defined in clause 8.2.1.2.15.1 in TS 38.133 [6] for NR victim cell.

5.5.6.4.1.2 Test applicability

This test applies to all types of EN-DC UE Rel-16 and forward supporting EN-DC with PSCell in FR2, and supporting scellDormancyWithinActiveTime-r16, along with supporting at least 2 active BWPs.

5.5.6.4.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 5.5.6.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.6.4.1.

5.5.6.4.1.4 Test description

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3)

The tests consist of three consecutive time periods T1, T2, and T3, respectively. All cells have constant signal levels throughout the test. The UE is continuously scheduled in PCell and PSCell throughout the test.

5.5.6.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.6.4.1.4.1-1.

Table 5.5.6.4.1.4.1-1: Dormancy switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in test case in clause 5.5.6.4.2 can skip the test cases in current clause 5.5.6.4.1. Note 3: NR configuration is the same for PSCell and SCells.	

Configure the test equipment and the DUT according to the parameters in Table 5.5.6.4.1.4.1-2.

Table 5.5.6.4.1.4.1-2: Initial conditions for EN-DC PSCell FR2

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the test configuration selected from Table 5.5.6.4.1.4.1-1.	
Propagation conditions	AWGN	As specified in clause C.2.2.

Connection Diagram	TE Part	Figure A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.6.4.1.4.1-3. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 in TS 38.133 [6], cell-specific parameters of NR PSCell are specified in Table 5.5.6.4.1.5-1.

2. Message contents are defined in clause 5.5.6.4.1.4.3.

3. There are one E-UTRAN cell and two NR cells specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.6.4.1.4.1-3: General test parameters for Dormancy switch in synchronous EN-DC

Parameter	Unit	Value		Comment
		Subtest 1	Subtest 2	
E-UTRA RF Channel Number		1		One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3		Two NR radio channel is used for this test
Active PCell		Cell 1		PCell on RF channel number 1.
Active PSCell		Cell 2		PSCell on RF channel number 2.
Active SCell		Cell 3		SCell on RF channel number 3.
CP length		Normal		
DRX		OFF		
Measurement gap pattern Id		OFF		
bwp-InactivityTimer	ms	500		
Cell-individual offset for cells on RF channel number 1	dB	0		Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0		Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0		Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3		Synchronous EN-DC
Cell3 timing offset to cell2	µs	0		Synchronous cells
Triggering DCI format		DCI 1_1		Triggering DCI format for triggering during active time
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2	3 – 11	Test1 is based on that triggering DCI is received within the first three OFDM symbols of a slot. Test2 is based on that the triggering DCI is received later than within the first three OFDM symbols of a slot.
T1	s	0.2		
T2	s	5		
T3	s	0.2		

5.5.6.4.1.4.2 Test procedure

TBD

5.5.6.4.1.4.3 Message contents

TBD

5.5.6.4.1.5 Test requirement

Table 5.5.6.4.1.5-1 defines the NR cell specific test parameters. Table 5.5.6.4.1.5-2 defines OTA related test parameters.

5.5.6.4.1.5-1: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Subtest 1		Subtest 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Frequency Range		FR2		FR2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66		100 MHz: $N_{RB,c}$ = 66	
Active BWP ID		0	0	0	0
Initial DL BWP Configuration		DLBWP.0.2	DLBWP.0.2	DLBWP.0.2	DLBWP.0.2
Active DL BWP-0 Configuration		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
Active DL BWP-1 Configuration		NA	DLBWP.1.2	NA	DLBWP.1.2
Initial UL BWP Configuration		ULBWP.0.2	ULBWP.0.2	ULBWP.0.2	ULBWP.0.2
Active UL BWP-0 Configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
Active UL BWP-1 Configuration		NA	ULBWP.1.2	NA	ULBWP.1.2
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET parameters		CCR.3.1 TDD		CCR.3.2 TDD	CCR.3.1 TDD
OCNG Patterns		OP.1		OP.1	
SSB Configuration		SSB.1 FR2		SSB.1 FR2	
SMTC Configuration		SMTC.1		SMTC.1	
TCI State		TCI.State.0		TCI.State.0	
TRS Configuration		TRS.2.1 TDD		TRS.2.1 TDD	
CSI-RS for CSI reporting		CSI-RS.3.1 TDD		CSI-RS.3.1 TDD	
CSI reporting periodicity	slots	640		640	
SCell measurement cycle (measCycleSCell)	ms	640		640	
Antenna Configuration		1x2		1x2	
Propagation Condition		AWGN		AWGN	
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3.

Table 5.5.6.4.1.5-2: OTA related test parameters for Dormancy switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15 in TS 38.133 [6]	
N_{oc} Note 1	dBm/15 kHz	-112	-112
SS-RSRP Note 2	dBm/120 kHz Note3	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
Io Note2	dBm/95.04 MHz Note4	-56	-56

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone.

During T1, any interruption on PSCell due to dormancy switching of SCell shall be within the requirement specified in in clause 5.5.6.4.0.1for NR victim cell.

During T2, interruptions on PSCell due to CSI and RRM measurements on dormant SCell shall be within the interruption rate requirements specified in 5.5.6.4.0.1for NR victim cell.

During T3, any interruption on PSCell due to dormancy switching of SCell shall be within the requirement specified in in clause 5.5.6.4.0.1for NR victim cell. Monitoring of PDCCH for SCell in PSCell shall be resumed within the dormancy switching time specified in TS 38.133 [6] clause 8.6.2A.

For an event to be considered to be correct, all requirements above have to be fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs

5.5.6.5.0 Minimum conformance requirements

5.5.6.5.0.1 Minimum conformance requirements for E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs with non-DRX in synchronous EN-DC

[TS38.133, Clause 8.6.3A]

The requirements in this clause only apply to the case when the same type of BWP switch (RRC based BWP switch) is performed on multiple CCs simultaneously or over partially overlapping time period.

The requirements in this clause shall apply:

- Active BWP switching or parameter change of its active BWPs for SpCell

- Parameter change of its active BWPs except parameter *firstActiveDownlinkBWP-Id* and *firstActiveUplinkBWP-Id* for SCells

Requirements in this clause apply only if RRC based BWP switching on multiple CCs for NR-CA is triggered by a single RRC command.

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWPs, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}+D_{RRC}*(N-1)}{NR\ slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in Clause 8.6.3 in TS 38.133 [6], and

$D_{RRC} = 0$ for UE which is capable of type 1 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [TS 38.331, 13]. $D_{RRC} = D$ for UE which is capable of type 2 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [TS 38.331, 13], where D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability [TS 38.306, 11].

N is the number of CCs within the NR-CA configured for performing simultaneous BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC} * (N-1)$ on the cells where RRC-based BWP switch occurs.

5.5.6.5.1 E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs with non-DRX in synchronous EN-DC

Editor's note: This test case is incomplete in following aspects:

- TT analysis is missing
- Message contents need more work

5.5.6.5.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement for simultaneous RRC-based BWP switch on multiple CCs defined in clause 8.6.3A in 38.133 [6].

5.5.6.5.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 onwards, supporting EN-DC, incremental delay for DCI and timer based active BWP switching on multiple CCs simultaneously and 2DL CA.

5.5.6.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.6.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.6.5.1.

5.5.6.5.1.4 Test description

5.5.6.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. Supported test configurations for LTE PCell, NR PSCell and NR SCell are shown in Table 5.5.6.5.1.4.1-1.

Table 5.5.6.5.1.4.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.6.5.1.4.1-2.

Table 5.5.6.5.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.6.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 5.5.6.5.1.4.1-3.

2. Message contents are defined in clause 5.5.6.5.1.4.3.

3. The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are configured according to clause C.1.2 and C.1.3.

4. By step 4 of the test procedure:

   - UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).

   - UE has dedicated bandwidth part BWP-1 in its RRC configuration for PSCell (Cell 2) and SCell (Cell 3)

   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell (Cell 2) and SCell (Cell 3).

Table 5.5.6.5.1.4.1-3: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1
Active PSCell		Cell 2	PSCell on RF channel number 2
Active SCell		Cell 3	SCell on RF channel number 3
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to Cell 1	μs	3	Synchronous EN-DC
Cell3 timing offset to Cell 2	μs	0	Synchronous Cells
T1	s	0.2	

5.5.6.5.1.4.2 Test procedure

The test consists of 1 time period with duration of T1. All cells have constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. NR Cell 3 is added as the SCell and activated.

2. Set the parameters according to Tables 5.5.6.5.1.4.1-3, Table 5.5.6.5.1.5-1, Table 5.5.6.5.1.5-2 and Table 5.5.6.5.1.5-3. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall send an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP* on NR Cell 2 and NR Cell 3. This message also configures another UE-specific bandwidth part, BWP-1, and indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to the initial condition of Active BWP-1 in Table 5.5.6.5.1.5-1, Table 5.5.6.5.1.5-2 and Table 5.5.6.5.1.5-3 for NR Cell 2 and NR Cell 3, respectively.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and SCell (Cell 3) to ensure that the UE will have ACK/NACK sending.

6. The SS shall send an *RRCConnectionReconfiguration* message with updated bandwidth part configuration for PSCell and SCell DL BWP switch, changing the BWP according to the final condition of Active BWP-1 in Table 5.5.6.5.1.5-1, Table 5.5.6.5.1.5-2 and Table 5.5.6.5.1.5-3.

7. T1 starts from the end of the slot (denote as slot #i) in which the UE receives the RRC message reconfiguring PSCell and SCell BWP, then it reconfigures its bandwidth part with the updated bandwidth part configuration.

   If the SS observes that,

   a) the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of the DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{\text{NR slot length}} + k_1$); and

   b) the UE starts to report valid ACK/NACK for SCell from the first UL slot that occurs after the beginning of the DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{\text{NR slot length}} + k_1$),

   then count a success for the test, otherwise count a fail for the test.

8. After the SS receives the ACK/NACK in step 7) or when T1 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 8 or step 9 fails, switch off and on the UE and go to step 1.

10. Repeat steps 3-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.6.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.6.5.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1

Table 5.5.6.5.1.4.3-2: *RRCReconfiguration* (Test procedure, step 3 and step 6)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 5.5.6.5.1.4.3-3	
}			
}			
}			

Table 5.5.6.5.1.4.3-3: *CellGroupConfig* (Table 5.5.6.5.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		

spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PSCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
spCellConfigDedicated	ServingCellConfig	Table 5.5.6.5.1.4.3-4	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		Entry 1	
sCellIndex	ServCellIndex of NR SCell		
sCellConfigDedicated	ServingCellConfig	Table 5.5.6.5.1.4.3-4	
}			
}			
}			

Table 5.5.6.5.1.4.3-4: *ServingCellConfig* (Table 5.5.6.5.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	1 entry		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 5.5.6.5.1.4.3-5	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	1 entry		
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 5.5.6.5.1.4.3-6	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 5.5.6.5.1.4.3-5: *BWP-Downlink* (Table 5.5.6.5.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 6
}			
}			

Table 5.5.6.5.1.4.3-6: BWP-Uplink (Table 5.5.6.5.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 6
}			
}			

5.5.6.5.1.5 Test requirements

Tables 5.5.6.5.1.4.1-3, 5.5.6.5.1.5-1, 5.5.6.5.1.5-2 and 5.5.6.5.1.5-3 define the primary level settings including test tolerances.

Table 5.5.6.5.1.5-1: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Frequency Range			FR2	FR2
Duplex mode			TDD	TDD
TDD configuration			TDDConf.3.1	TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66	100 MHz: $N_{RB,c}$ = 66
Active BWP ID			1	1
Initial DL BWP Configuration			DLBWP.0.2	DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2	ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3	DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3	ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1	DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1	ULBWP.1.1
PDSCH Reference measurement channel			SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD	CR.3.1 TDD

Dedicated CORESET parameters		CCR.3.1 TDD	CCR.3.1 TDD
OCNG Patterns		OP.1	OP.1
SSB Configuration		SSB.1 FR2	SSB.1 FR2
SMTC Configuration		SMTC.1	SMTC.1
TCI State		TCI.State.0	TCI.State.0
TRS Configuration		TRS.2.1 TDD	TRS.2.1 TDD
Antenna Configuration		1x2	1x2
Propagation Condition		AWGN	AWGN
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS (Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table 5.5.6.5.1.5-2: NR Cell specific test parameters for SCell (NR Cell 3)

Parameter			Unit	Cell 3
Frequency Range				FR1
Duplex mode		$Config_{SCell}$ 1		FDD
		$Config_{SCell}$ 2,3		TDD
TDD configuration		$Config_{SCell}$ 1		Not Applicable
		$Config_{SCell}$ 2		TDDConf.1.1
		$Config_{SCell}$ 3		TDDConf.1.2
$BW_{channel}$		$Config_{SCell}$ 1		10 MHz: $N_{RB,c}$ = 52
		$Config_{SCell}$ 2		10 MHz: $N_{RB,c}$ = 52
		$Config_{SCell}$ 3		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID				1
Initial DL BWP Configuration		$Config_{SCell}$ 1		DLBWP.0.2
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
Initial UL BWP Configuration		$Config_{SCell}$ 1		ULBWP.0.2
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
Initial Condition	Active DL BWP-1 Configuration	$Config_{SCell}$ 1		DLBWP.1.3
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
	Active UL BWP-1 Configuration	$Config_{SCell}$ 1		ULBWP.1.3
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
Final Condition	Active DL BWP-1 Configuration	$Config_{SCell}$ 1		DLBWP.1.1
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		

	Active UL BWP-1 Configuration	$Config_{SCell}$ 1		ULBWP.1.1
		$Config_{SCell}$ 2		
		$Config_{SCell}$ 3		
PDSCH Reference measurement channel		$Config_{SCell}$ 1		SR.1.1 FDD
		$Config_{SCell}$ 2		SR.1.1 TDD
		$Config_{SCell}$ 3		SR2.1 TDD
RMSI CORESET parameters		$Config_{SCell}$ 1		CR.1.1 FDD
		$Config_{SCell}$ 2		CR.1.1 TDD
		$Config_{SCell}$ 3		CR2.1 TDD
Dedicated CORESET parameters		$Config_{SCell}$ 1		CCR.1.1 FDD
		$Config_{SCell}$ 2		CCR.1.1 TDD
		$Config_{SCell}$ 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		$Config_{SCell}$ 1,2		SSB.1 FR1
		$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		$Config_{SCell}$ 1		TRS.1.1 FDD
		$Config_{SCell}$ 2		TRS.1.1 TDD
		$Config_{SCell}$ 3		TRS.1.2 TDD
Antenna Configuration				1x2
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note 2			dBm/15 kHz	[-104]
SS-RSRP Note 3			dBm/15 kHz	[-87]
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
Io Note3		$Config_{SCell}$ 1,2	dBm/ 9.36MHz	[-59]
		$Config_{SCell}$ 3	dBm/ 38.16MHz	[-61.9]

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table 5.5.6.5.1.5-3: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to table A.3.15	Setup 1 according to table A.3.15
Assumption for UE beams Note 5		Fine	Fine
N_{oc} Note1	dBm/15kHz	-112	-112
N_{oc} Note1	dBm/SCS	-103	-103

SS-RSRP Note2	dBm/SCS Note3	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
Io Note2	dBm/95.04 MHz Note4	-56	-56

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

During T1, the UE shall be ready for the reception of uplink grant for PSCell and SCell in the beginning of the DL slot right after slot $(i+\frac{T_{RRC processing Delay}+T_{BWP switch Delay RRC}+D_{RRC}}{NR\ slot\ length})$.

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.7 PSCell addition and release delay

5.5.7.0 Minimum conformance requirements

Same as in clause 4.5.7.0.

5.5.7.1 Addition and Release Delay of NR PSCell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.5.7.1.1 Test purpose

The purpose of this test is to verify the NR PSCell addition and release delays under EN-DC when the PSCell is unknown by the UE at the time of addition. This test will verify the requirements in clause 7.31.2 in TS 38.133 [6].

5.5.7.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 which supports EN-DC.

5.5.7.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 5.5.7.0.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.7.1.

5.5.7.1.4 Test description

5.5.7.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.7.1.4.1-1.

Table 5.5.7.1.4.1-1: Test configurations

Configuration	Description
5.5.7.1-1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
5.5.7.1-2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 5.5.7.1.4.1-2.

Table 5.5.7.1.4.1-2: General Test Parameters for PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-118	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	s	0	
DRX			OFF	Continuous monitoring of primary cell
PRACH configuration on cell2			FR2 configuration 2	Captured in A.3.8.3.2
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	1	During this time the UE adds the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.
T4		s	1	During this time the UE releases the PSCell.

Table 5.5.7.1.4-3: Test Environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	

Exceptions to connection diagram		

1. Message contents are defined in clause 5.5.7.1.4.3.
2. There are two cells on two different carriers in the test. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC.

5.5.7.1.4.2 Test procedure

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. The SS shall set the parameters according to Table 5.5.7.1.5-1 as appropriate. T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration message* with event B1 configured.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. T2 starts from the instant when the SS sends the last TTI containing the RRC message, the SS shall set T2 parameters according to Table 5.5.7.1.5-1 as appropriate.
6. The UE shall transmit a MeasurementReport message triggered by Event B1 for Cell 2 no later than TBD from the start of T2.
7. The UE shall send a PRACH to PSCell during T2. The UE shall send PRACH no later than TBD from the start of T2, otherwise increase the number of failed iterations by one, switch off the UE and continue with step 12.
8. T3 starts when UE has sent the PRCH. During T3 the UE shall send at least one CSI report for PSCell with non-zero CQI index, otherwise increase the number of failed iterations by one, switch off the UE and continue to step TBD.
9. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell) after the UE has send at least one CQI report with non-zero CQI index for PSCell (Cell 2). T4 starts from the instant when the SS sends the last TTI containing the RRC message.
10. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
11. The UE shall stop sending CSI reports for PSCell no later than 20ms from the start of T6, if so increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.
12. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
13. If the UE is not switched off, the SS shall transmit an RRCConnectionRelease message to release the RRC connection then, the SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State E-UTRA RRC_CONNECTED with generic parameter Connectivity E-UTRA/EPC. If paging succeeds, go to step 15, otherwise switches off the UE.
14. Switches on the UE and ensures the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
15. Repeat step 2-14 until a test verdict has been achieved.

5.5.7.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.7.1.4.3-1: Common Exception messages for PSCell Addition and Release

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 for step 3 Table H.3.4-1 for step 6. Table H.3.4-4 with condition INTER-RAT NR and EVENT B1

5.5.7.1.5 Test requirement

Table 5.5.7.1.5-1 defines the NR cell specific test parameters, not including test tolerances yet.

Table 5.5.7.1.5-1: Cell specific test parameters

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA Channel Number		1,2	1			
NR Channel Number		1,2	2			
Duplex Mode		1,2	TDD			
TDD configuration		1,2	TDDConf.3.1			
$BW_{channel}$	MHz	1,2	100: NRB,c = 66			
Data RBs allocated		1,2	48			
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1			
TRS Configuration		1	TRS.2.1 TDD			
PDSCH/PDCCH TCI state		1	TCI.State.2			
PDSCH Reference measurement channel		1,2	SR.3.3 TDD			
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD			
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD			
OCNG Patterns		1,2	OP.3			
SSB configuration		1,2	SSB.2 FR2			
SMTC configuration		1,2	SMTC.2			
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120			
TRS Configuration		1,2	TRS.2.1 TDD			
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD			
reportConfigType		1,2	periodic			
reportQuantity		1,2	cri-RI-PMI-CQI			
CSI reporting periodicity	slot	1,2	40			
CSI reporting offset	slot	1,2	4			
EPRE ratio of PSS to SSS	dB	1,2	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
Propagation condition		1,2	No external noise (Note 1)			
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [37].						

Table 5.5.7.1.5-2: NR OTA Cell specific test parameters

Parameter	Unit	Cell 2

		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams Note 6		Rough			
$\hat{E}s$ Note2	dBm/SCS	-∞	-81		
SSB_RP Note2, Note 4	dBm/SCS	-∞	-81		
$\hat{E}_s/I_{ot}$ BB Note 2, Note 7	dB	-∞	4.88		
Io Note 2, Note 4	dBm/95.04 MHz	N/A	-56.41		

Note 1: Void
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Information about types of UE beam is given in TS.38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation
Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

The UE shall transmit the PRACH to PSCell at latest 582 ms into T2.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T3.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T3

The UE shall stop sending CSI reports for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell addition delay and PSCell release delay to be counted as correct.

The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90% with the confidence level of 95%,

5.5.8 Active TCI state switch delay

5.5.8.0 Minimum conformance requirements

5.5.8.0.1 Minimum conformance requirements for MAC-CE based active TCI state switch

[TS38.133, clause 8.10.2]

The TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target TCI state to the completion of active TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target TCI state or QCLed to the target TCI state
  - TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
  - The UE has sent at least 1 L1-RSRP report for the target TCI state before the TCI state switch command
  - The TCI state remain detectable during the TCI state switching period
  - The SSB associated with the TCI state remain detectable during the TCI switching period
    - SNR of the TCI state ≥ -3dB

Otherwise, the TCI state is unknown.

[TS38.133, clause 8.10.3]

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs no later than at slot n+ T_{HARQ} +(3ms +TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$)) / *NR slot length*. The UE shall be able to receive PDCCH with the old TCI state until slot n+ T_{HARQ} +(3ms +TO_k*($T_{first\text{-}SSB}$)) / *NR slot length*.

Where,

T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.321 [7];

$T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE;

$T_{SSB\text{-}proc}$ = 2ms;

TO_k = 1 if target TCI state is not in the active TCI state list for PDSCH, 0 otherwise.

If the target TCI state is unknown, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs no later than at slot n+ T_{HARQ} +(3 ms + $T_{L1\text{-}RSRP}$ +TO_{uk}*($T_{first\text{-}SSB}$+ $T_{SSB\text{-}proc}$)) / *NR slot length*. The UE shall be able to receive PDCCH with the old TCI state until slot n+ T_{HARQ} +(3 ms+ $T_{L1\text{-}RSRP}$ +TO_{uk}*($T_{first\text{-}SSB}$)) / *NR slot length*.

Where

$T_{L1\text{-}RSRP}$ is the time for L1-RSRP measurement for Rx beam refinement, defined as

- $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ for SSB as specified in clause 9.5.4.1,
  - with the assumption of M=1
  - with T_{Report} = 0
- $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for CSI-RS as specified in clause 9.5.4.2
  - with the assumption of M=1 for periodic CSI-RS
  - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
  - with T_{Report} = 0
- $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ = 0 for SSB in FR2 and $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ = 0 for CSI-RS in FR2, provided that the TCI state switching involves QCL-TypeA, QCL-TypeB or QCL-TypeC only.

TO_{uk} = 1 for CSI-RS based L1-RSRP measurement, and 0 for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD

TO_{uk} = 1 when TCI state switching involves other QCL types

$T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;

$T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;

The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

During MAC-CE based TCI state switch the UE is allowed an interruption due to one shot timing adjustment on the serving or any activated serving cells as defined in clause 8.2.

5.5.8.0.2 Minimum conformance requirements for RRC based active TCI state switch

[TS38.133, clause 8.10.2]

The TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target TCI state to the completion of active TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target TCI state or QCLed to the target TCI state

- TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target TCI state before the TCI state switch command
- The TCI state remain detectable during the TCI state switching period
- The SSB associated with the TCI state remain detectable during the TCI switching period
  - SNR of the TCI state ≥ -3dB

Otherwise, the TCI state is unknown.

[TS38.133, clause 8.10.5]

If the target TCI state is known, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs no later than at slot n+ $T_{RRC_processing}$ +TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) / *NR slot length*. The UE is not required to receive PDCCH/PDSCH or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in Clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS 38.331 [2].
- $T_{first\text{-}SSB}$ is time to first SSB transmission after RRC processing by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{SSB\text{-}proc}$ and TO_k are defined in clause 8.10.3.

If the target TCI state is unknown, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs no later than at slot n+ $T_{RRC_processing}$ +$T_{L1\text{-}RSRP}$ +TO_{uk}*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) / *NR slot length*. The UE is not required to receive PDCCH/PDSCH or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in Clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS 38.331 [2].
- $T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{first\text{-}SSB}$ is time to first SSB transmission after RRC processing time at the UE for other QCL types;
  - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{L1\text{-}RSRP}$, TO_{uk} and $T_{SSB\text{-}proc}$ are defined in 38.133 clause 8.10.3.

The requirements for RRC based TCI state switch delay apply when only 1 TCI state is configured in RRC TCI state list. When $T_{HARQ} > T_{RRC_processing}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

5.5.8.1 EN-DC FR2 MAC-CE based active TCI state switch

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Message contents are not complete.

- Connection diagram is TBD.

- TT analysis is missing.

- RAN4 dependency: Test parameters have brackets and TBDs.

5.5.8.1.1 Test purpose

The purpose of this test is to verify the active TCI state switch delay requirement defined in TS 38.133 [6] clause 8.10.3.

5.5.8.1.2 Test applicability

This test applies to all types of NR UE release 15 onwards.

5.5.8.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.8.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.8.1.

5.5.8.1.4 Test description

There are two cell configured in this test: E-UTRAN PCell (Cell 1) and NR PSCell (Cell 2). This test consists of two successive time periods, with time duration of T1 and T2 respectively.

5.5.8.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.8.1.4.1-1.

Table 5.5.8.1.4.1-1: Supported test configurations for EN-DC FR2 MAC-CE based active TCI state switch

Config	Description
5.5.8.1-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.8.1-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.8.1.4.1-2.

Table 5.5.8.1.4.1-2: Initial conditions for EN-DC FR2 MAC-CE based active TCI state switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.8.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.TBD	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.8.1.4.1-3.

2. Message contents are defined in clause 5.5.8.1.4.3.

3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.8.1.4.1-3: General test parameters for EN-DC FR2 MAC-CE based active TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	[0.2]	
T2	s	[0.2]	

5.5.8.1.4.2 Test procedure

During the test PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Prior to the start of the time duration T1, the UE shall be fully synchronized to E-UTRA PCell and PSCell. The UE shall be configured with 2 different TCI states for PSCell: PDCCH TCI-state 0 (QCL'd to SSB0) and TCI-state 1 (QCL'd to SSB1), in Cell 2 before starting the test. TCI state-0 is indicated as the active PDCCH TCI-state

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters of NR Cell 1 according to T1 in Table 5.5.8.1.5-1. Propagation conditions are set according to clause C.2.3. T1 starts. During T1 only SSB to which PDCCH TCI-state 0 is QCL'd is transmitted.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.8.1.5-1. T2 starts. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting.

4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.

5. The UE transmits an *RRCReconfigurationComplete* message.

6. The SS sends a MAC-CE to indicate switch to TCI-state 1 in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.

7. If the SS:

   a) Receives ACK/NACK on each UL transmission occasion scheduled on TCI-state 0 until slot $n+T_{HARQ}+24+8\times T_{first\text{-}SSB}$, and

   b) Receives ACK/NACK on each UL transmission occasion scheduled on TCI-state 1 after slot $n+T_{HARQ}+40+8\times T_{first\text{-}SSB}$

   the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.

8. When T2 expires the SS shall sends a MAC-CE to indicate switch to TCI-state 0.

9. Wait 1s for the UE to switch TCI-state 0. If the SS receives ACK/NACK on each UL transmission occasion scheduled on TCI-state 0 continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.8.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.8.1.4.3-1: Common Exception messages for EN-DC FR2 MAC-CE based active TCI state switch

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	FFS

5.5.8.1.5 Test requirement

Tables 5.5.8.1.4.1-3, 5.5.8.1.5-1 and 5.5.8.1.5-2 define the primary level settings including test tolerances for EN-DC FR2 MAC-CE based active TCI state switch.

Table 5.5.8.1.5-1: NR Cell specific test parameters for EN-DC FR2 MAC-CE based active TCI state switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TC. State.0
TCI State 1		TCI.State.1
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (NOTE 2)
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]		

Table 5.5.8.1.5-2: OTA related test parameter for EN-DC FR2 MAC-CE based active TCI state switch

Parameter	Unit	Cell 2			
		SSB0		SSB1	
		T1	T2	T1	T2

Angle of arrival configuration		Setup 3			
N_{oc} Note 1	dBm/15 kHz	[-92.1]			
N_{oc} Note 1	dBm/SCS	[-83.1]			
$\hat{E}_s/N_{oc}$	dB	1	1	-Infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1	-82.1	-Infinity	-82.1
Io Note2,Note6	dBm/95.04 MHz Note4	-54.94	-54.94	-54.94	-54.94
NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. NOTE 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone NOTE 5: As observed with 0dBi gain antenna at the center of the quiet zone.					

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall be able to continue to receive on TCI state 0 until $n+T_{HARQ}+(3ms+T_{first\text{-}SSB})$ / NR slot length, where

- T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [8];
- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE;
- NR slot length = 0.125ms for 120kHz SSB SCS;

So UE shall be able to continue to receive PDCCH on TCI state 0 until $n+T_{HARQ}+24+8\times T_{first\text{-}SSB}$

After receiving MAC-CE command in slot n, UE shall be able to receive PDCCH with TCI state 1 no later than at slot $n+T_{HARQ}+(3ms+T_{first\text{-}SSB} + T_{SSB\text{-}proc})$) / NR slot length., where

- T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [8];
- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE;
- $T_{SSB\text{-}proc}$ = 2 ms;
- NR slot length = 0.125ms for 120kHz SSB SCS;

So UE shall be able to continue to receive PDCCH on TCI state 1 no later than $n+T_{HARQ}+40+8\times T_{first\text{-}SSB}$

5.5.8.2 EN-DC FR2 RRC based active TCI state switch

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Message contents are not complete.
- Connection diagram is TBD.
- TT analysis is missing.
- RAN4 dependency: Test parameters have brackets and TBDs.

5.5.8.2.1 Test purpose

The purpose of this test is to verify the active TCI state switch delay requirement defined in TS 38.133 [6] clause 8.10.3.

5.5.8.2.2 Test applicability

This test applies to all types of NR UE release 15 onwards.

5.5.8.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.8.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.8.2.

5.5.8.2.4 Test description

There are two cell configured in this test: E-UTRAN PCell (Cell 1) and NR PSCell (Cell 2). This test consists of two successive time periods, with time duration of T1 and T2 respectively.

5.5.8.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.8.2.4.1-1.

Table 5.5.8.2.4.1-1: Supported test configurations for EN-DC FR2 RRC based active TCI state switch

Config	Description
5.5.8.2-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.8.2-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.8.2.4.1-2.

Table 5.5.8.2.4.1-2: Initial conditions for EN-DC FR2 RRC based active TCI state switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.8.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.TBD	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.8.2.4.1-3.
2. Message contents are defined in clause 5.5.8.2.4.3.
3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.8.2.4.1-3: General test parameters for EN-DC FR2 RRC based active TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	[0.2]	
T2	s	[0.2]	

5.5.8.2.4.2 Test procedure

During the test PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Prior to the start of the time duration T1, the UE shall be fully synchronized to E-UTRA PCell and PSCell. The UE shall be configured with 2 different TCI states for PSCell: PDCCH TCI-state 0 (QCL'd to SSB0) and TCI-state 1 (QCL'd to SSB1), in Cell 2 before starting the test. TCI state-0 is indicated as the active PDCCH TCI-state

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
2. Set the parameters of NR Cell 1 according to T1 in Table 5.5.8.2.5-1. Propagation conditions are set according to clause C.2.3. T1 starts. During T1 only SSB to which PDCCH TCI-state 0 is QCL'd is transmitted.
3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.8.2.5-1. T2 starts. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting.
4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.
5. The UE transmits an *RRCReconfigurationComplete* message.
6. The SS sends an *RRCReconfiguration* message to indicate switch to TCI-state 1 in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.
7. The UE transmits an *RRCReconfigurationComplete* message.
8. If the SS receives ACK/NACK on each UL transmission occasion scheduled on TCI-state 1 after slot $n+176+8\times T_{first\text{-}SSB}$ the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.
9. When T2 expires the SS sends an *RRCReconfiguration* message to indicate switch to TCI-state 0.
10. The UE transmits an *RRCReconfigurationComplete* message.
11. Wait 1s for the UE to switch TCI-state 0. If the SS receives ACK/NACK on each UL transmission occasion scheduled on TCI-state 0 continue to step 13. Otherwise continue to step 12.
12. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
13. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.8.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.8.2.4.3-1: Common Exception messages for EN-DC FR2 RRC based active TCI state switch

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	FFS

5.5.8.2.5 Test requirement

Tables 5.5.8.2.4.1-3, 5.5.8.2.5-1 and 5.5.8.2.5-2 define the primary level settings including test tolerances for EN-DC FR2 RRC based active TCI state switch.

Table 5.5.8.2.5-1: NR Cell specific test parameters for EN-DC FR2 RRC based active TCI state switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.0
TCI State 1		TCI.State.1
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (NOTE 2)

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]

Table 5.5.8.2.5-2: OTA related test parameter for EN-DC FR2 RRC based active TCI state switch

Parameter	Unit	Cell 2			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3			
N_{oc} Note 1	dBm/15 kHz	[-92.1]			
N_{oc} Note 1	dBm/SCS	[-83.1]			
$\hat{E}_s/N_{oc}$	dB	1	1	-Infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1	-82.1	-Infinity	-82.1
Io Note2,Note6	dBm/95.04 MHz Note4	-54.94	-54.94	-54.94	-54.94

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
NOTE 5: As observed with 0dBi gain antenna at the centre of the quiet zone.

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving RRC command in slot n, UE shall be able to receive PDCCH with TCI state 1 no later than at slot n+ ($T_{RRC_processing}$ + $T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) / NR slot length, where

- $T_{RRC_processing}$ =20 ms is the RRC processing delay as specified in TS 38.331 [13];
- $T_{first\text{-}SSB}$ is time to first SSB transmission after RRC processing by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to TCI state 1;
- $T_{SSB\text{-}proc}$ = 2 ms;
- NR slot length = 0.125ms for 120kHz SSB SCS;

So UE shall be able to continue to receive PDCCH on TCI state 1 no later than slot n+176+8$\times T_{first\text{-}SSB}$.

5.5.9 Uplink spatial relation switch delay

5.5.9.0 Minimum conformance requirements

5.5.9.0.1 Minimum conformance requirements for MAC-CE based uplink spatial relation switch delay

[TS38.133, Clause 8.12.3]

If the target spatial relation associated to DL RS is known, upon receiving PDSCH carrying MAC-CE activation command in slot n, for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation in the slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ 1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1 where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213.

If the target spatial relation associated to DL RS is unknown, upon receiving PDSCH carrying MAC-CE activation command in slot n, for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation in the slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ $T_{L1\text{-}RSRP}$+1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213,
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as
  - $T_{L1\text{-}RSPR_Measurement_Period_SSB}$ for SSB as specified in clause 9.5.4.1,
    - with the assumption of M=1
    - with T_{Report} = 0
  - $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for CSI-RS as specified in clause 9.5.4.2
    - configured with higher layer parameter *repetition* set to ON
    - with the assumption of M=1 for periodic CSI-RS
    - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
    - with $_{T}$Report = 0

The UE shall be able to transmit with the old UL spatial relation until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$.

When the UL spatial relation info switch for PUCCH changes both the associated DL RS and *pucch-PathlossReferenceRS* with the same MAC-CE activation, and if both the DL RS and *pucch-PathlossReferenceRS* are known as specified in clause 8.12.2 and 8.14.2 respectively, the UE shall be able to transmit PUCCH with the target UL spatial relation after the delay specified in clause 8.14.3. If either the associated DL RS or *pucch-PathlossReferenceRS*

are unknown, a longer switching delay is allowed. The UE is not required to transmit PUCCH with the target UL spatial relation until the DL RS and pathloss reference RS switch are completed.

5.5.9.0.2 Minimum conformance requirements for RRC based uplink spatial relation switch delay

[TS38.133, Clause 8.12.5]

If the target spatial relation associated to DL RS is known, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured in the slot n+ $T_{RRC_processing}$ */NR slot length* +1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in 36.331 is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331.

If the target spatial relation associated to DL RS is unknown, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured in the slot n+ $T_{RRC_processing}$ */NR slot length* + $T_{L1\text{-}RSRP}$ +1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in 36.331 is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331.
- $T_{L1\text{-}RSRP}$ is defined in clause 8.12.3.

5.5.9.1 MAC-CE based uplink spatial relation switch

5.5.9.1.1 E-UTRAN - NR PSCell FR2 uplink spatial relation switch for a known spatial relation

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing.

5.5.9.1.1.1 Test purpose

The purpose of this test is to verify the uplink spatial relation switch delay requirement defined in TS 38.133 [6] clause 8.12.3 by a UE capable of beam correspondence without the need for UL beam sweeping.

5.5.9.1.1.2 Test applicability

This test applies to all types of EN-DC UE Rel-16 and forward supporting EN-DC with PSCell in FR2.

5.5.9.1.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 5.5.9.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.9.1.

5.5.9.1.1.4 Test description

There are two cells configured in this test: E-UTRAN PCell (Cell 1) and NR PSCell (Cell 2). This test consists of two successive time periods, with time duration of T1 and T2 respectively.

5.5.9.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.9.1.1.4.1-1.

Table 5.5.9.1.1.4.1-1: Supported test configurations

Config	Description
5.5.9.1.1-1	LTE FDD; NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.9.1.1-2	LTE TDD; NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.9.1.1.4.1-2.

Table 5.5.9.1.1.4.1-2: Initial conditions for EN-DC PSCell FR2 uplink spatial relation switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.9.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.9.1.1.4.1-3. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.2-1 in TS 38.133 [6].

2. Message contents are defined in clause 5.5.9.1.1.4.3.

3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.9.1.1.4.1-3: General test parameters for spatial relation switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

5.5.9.1.1.4.2 Test procedure

During the test PDCCH indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have continuous ACK/NACK sending by PUCCH.

Prior to the start of the time duration T1, the UE shall be fully synchronized to E-UTRA PCell and NR PSCell. The UE shall be configured with 2 different spatial relations for PSCell: PUCCH spatial relation 0 (QCL'd to SSB0) and spatial relation 1 (QCL'd to SSB1), in Cell 2 before starting the test. Spatial relation 0 is indicated as the active PUCCH spatial relation.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
2. Set the parameters of NR Cell 2 according to T1 in Table 5.5.9.1.1.5-1. Propagation conditions are set according to clause C.2.2. T1 starts. During T1 only SSB0 to which PUCCH spatial relation 0 is QCL'd is transmitted.
3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.9.1.1.5-2. T2 starts. At the beginning of T2, the SSB1 corresponding to spatial relation 1 starts transmitting.
4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.
5. The UE transmits an *RRCReconfigurationComplete* message.
6. The SS sends a MAC-CE to indicate switch to spatial relation 1 in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.
7. If the SS:
   a) Receives ACK/NACK on each UL transmission occasion scheduled on spatial relation 0 until slot *n* + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$, and
   b) Receives ACK/NACK on each UL transmission occasion scheduled on spatial relation 1 on and after slot *n* + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$ + 1.

   the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.
8. When T2 expires the SS shall sends a MAC-CE to indicate switch to spatial relation 0.
9. Wait 1s for the UE to switch to spatial relation 0. If the SS receives ACK/NACK on each UL transmission occasion scheduled on spatial relation 0, continue to step 11. Otherwise continue to step 10.
10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.9.1.1.4.3 Message contents

TBD

5.5.9.1.1.5 Test requirement

Table 5.5.9.1.1.5-1 and 5.5.9.1.1.5-2 define the primary level settings including test tolerances for all tests.

Table 5.5.9.1.1.5-1: NR Cell specific test parameters for spatial relation switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2

Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
Spatial Relation 0		PUCCH. SRI.0
Spatial Relation 1		PUCCH. SRI.1
TRS Configuration		TRS.2.1 TDD
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 5.5.9.1.1.5-2: OTA related test parameters for uplink spatial relation switch

Parameter	Unit	Cell 2			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
Noc Note 1	dBm/15 kHz	-92.1			
Noc Note 1	dBm/SCS	-83.1			
Ês/Noc	dB	1	1	-Infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1	-82.1	-Infinity	-82.1
Io Note2,Note6	dBm/95.04 MHz Note4	-50.6	-50.6	-54.1	-50.6
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.					
Note 6: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6] and does not limit UE implementation or test system implementation.					

During T2, UE shall send L1-RSRP report with results for SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to transmit PUCCH on spatial relation 0 till n + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$;
- be able to start transmitting PUCCH on spatial relation 1 from slot n + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$ + 1.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

5.5.9.2 RRC based uplink spatial relation switch

5.5.9.2.1 E-UTRAN - NR PSCell FR2 spatial relation switch associated with a known DL-RS

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing.

5.5.9.2.1.1 Test purpose

The purpose of this test is to verify the RRC based uplink spatial relation switch delay requirement defined in TS 38.133 [6] clause 8.12.5 by a UE capable of beam correspondence without the need for UL beam sweeping.

5.5.9.2.1.2 Test applicability

This test applies to all types of EN-DC UE Rel-16 and forward supporting EN-DC with PSCell in FR2.

5.5.9.2.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 5.5.9.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.9.2.

5.5.9.2.1.4 Test description

There are two cells configured in this test: E-UTRAN PCell (Cell 1) and NR PSCell (Cell 2). This test consists of two successive time periods, with time duration of T1 and T2 respectively.

5.5.9.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.9.2.1.4.1-1.

Table 5.5.9.2.1.4.1-1: Supported test configurations

Config	Description
5.5.9.2.1-1	LTE FDD; NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.9.2.1-2	LTE TDD; NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.9.2.1.4.1-2.

Table 5.5.9.2.1.4.1-2: Initial conditions for EN-DC PSCell FR2 uplink spatial relation switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.9.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	

Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 5.5.9.2.1.4.1-3. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.2-1 in TS 38.133 [6].
2. Message contents are defined in clause 5.5.9.2.1.4.3.
3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.9.2.1.4.1-3: General test parameters for spatial relation switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
T1	s	0.2	
T2	s	2	

5.5.9.2.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to E-UTRA PCell and NR PSCell. The UE shall be configured with 1 SRS-SpatialRelation0 associated with SSB0. UE is indicated SRS-SpatialRelation0 as the active SRS spatial relation.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
2. Set the parameters of NR Cell 2 according to T1 in Table 5.5.9.2.1.5-1. Propagation conditions are set according to clause C.2.2. T1 starts. During T1 only SSB0 to which SRS-SpatialRelation0 associated is transmitted.
3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.9.2.1.5-2. T2 starts. At the beginning of T2, the SSB1 corresponding to SRS-SpatialRelation1 starts transmitting.
4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.
5. The UE transmits an *RRCReconfigurationComplete* message.
6. The SS sends a RRC to indicate switch to periodic SRS with target SRS-SpatialRelation1 in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.
7. If the SS:

   a) Receives periodic SRS with target spatial relation (SRS-SpatialRelation0) on PSCell until n + $T_{RRC_processing}$/NR slot length, and

   b) Receives periodic SRS with target spatial relation (SRS-SpatialRelation1) on PSCell on and after n + $T_{RRC_processing}$/NR slot length + 1.

   the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.

8. When T2 expires the SS shall sends a RRC to indicate switch to SRS-SpatialRelation0.
9. Wait 1s for the UE to switch to SRS-SpatialRelation0. If the SS receives SRS with target spatial relation (SRS-SpatialRelation0), continue to step 11. Otherwise continue to step 10.
10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.9.2.1.4.3 Message contents

TBD

5.5.9.2.1.5 Test requirement

Table 5.5.9.2.1.5-1 and 5.5.9.2.1.5-2 define the primary level settings including test tolerances for all tests.

Table 5.5.9.2.1.5-1: NR Cell specific test parameters for spatial relation switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
SRS-SpatialRelation0		SRS.SRI0
SRS-SpatialRelation1		SRS.SRI1
TRS Configuration		TRS.2.1 TDD
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	160
timeRestrictionForChannelMeasurements		configured
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 5.5.9.2.1.5-2: OTA related test parameters for uplink spatial relation switch

Parameter	Unit	Cell 2	
		SSB0	SSB1

		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		**AoA2**	
Assumption for UE beams Note 6		Rough		Rough	
N_{oc} Note 1	dBm/15 kHz	-92.1			
N_{oc} Note 1	dBm/SCS	-83.1			
$\hat{E}_s/N_{oc}$	dB	1	1	-Infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1	-82.1	-Infinity	-82.1
Io Note2,Note6	dBm/95.04 MHz Note4	-50.6	-50.6	-54.1	-50.6

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the center of the quiet zone.
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

During T2, UE shall send L1-RSRP report with SSB1 to which SRS-SpatialRelation1 is associated.

After receiving RRC command in slot n, UE shall be able to transmit target periodic SRS with SRS-SpatialRelation1 on PSCell in the slot n + $T_{RRC_processing}$/*NR slot length* + 1.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

5.5.10 UE specific CBW change

5.5.10.0 Minimum conformance requirements

5.5.10.0.1 Minimum conformance requirements for UE specific CBW change

[TS38.133, Clause 8.13]

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on the DL BWP with BWP ID firstActiveDownlinkBWP-Id or transmit PUSCH on the UL BWP with BWP ID firstActiveUplinkBWP-Id of the new CBW right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in millisecond as defined in clause 11.2 in TS 36.331 [29] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in millisecond as defined in clause 12 in TS 38.331 [13], and

$T_{CBWchangeDelayRRC} = 6ms$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ on the cell where UE-specific CBW change occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

5.5.10.1 UE specific CBW change on FR2 NR PSCell

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing

- TT analysis is missing

5.5.10.1.1 Test purpose

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13 in TS 38.133 [6].

5.5.10.1.2 Test applicability

This test applies to all types of EN-DC UE Rel-16 and forward supporting EN-DC with PSCell in FR2. The requirements in this test apply for a UE which receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

5.5.10.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 5.5.10.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.10.1.

5.5.10.1.4 Test description

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table 5.5.10.1.4.1-3. All cells have constant signal levels throughout the test. The test consists of 1 time period, with duration of T1.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

During T1 the SS sends an *RRCReconfiguration* message containing *SCS-SpecificCarrier* to reconfigure UE-specific CBW. The SS verifies the UE specific CBW switching delay in PSCell by estimating the time from the moment the *RRCReconfiguration* message including updated UE-specific CBW configuration is sent to the moment a valid ACK/NACK is received (RRC Reconfiguration Complete message).

5.5.10.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.10.1.4.1-1.

Table 5.5.10.1.4.1-1: UE specific CBW change supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.10.1.4.1-2.

Table 5.5.10.1.4.1-2: Initial conditions for EN-DC PSCell FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.10.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.10.1.4.1-3. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 in TS 38.133 [6], cell-specific parameters of NR PSCell are specified in Table 5.5.10.1.5-1.

2. Message contents are defined in clause 5.5.10.1.4.3.

3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.10.1.4.1-3: General test parameters for UE specific CBW change in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	[0.2]	

5.5.10.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4. UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC). UE has been configured via RRC-configuration (*SCS-SpecificCarrier* in TS 38.331 [13]) with UE specific CBW (CBW-1), initial BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP in PSCell. Set the parameters according to Tables 4.5.9.1.4.1-3 and 4.5.9.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

2. The SS starts sending PDCCHs indicating new transmissions continuously on Cell 2.

3. The SS sends an *RRCReconfiguration* message containing *SCS-SpecificCarrier* with updated UE specific CBW (CBW-2), dedicated BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP.

4. T1 starts from the beginning of slot *i*, where slot *i* is the last slot carrying the PDSCH containing the *RRCReconfiguration* message in step 3.

5. The UE shall reconfigure its CBW with the updated CBW of final condition (CBW-2).

6. The SS verifies the UE specific CBW change time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated CBW configuration is sent till the time when RRC Reconfiguration Complete message is received.

7. If the UE starts to report valid ACK/NACK for the PSCell from the first UL slot that occurs after the beginning of DL slot ($i+ \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$) then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. If it is successful, continue to step 10. Otherwise continue to step 9.

9. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

10. Repeat steps 2-9 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.10.1.4.3 Message contents

TBD

5.5.10.1.5 Test requirement

Table 5.5.10.1.5-1 defines the NR cell specific test parameters. Table 5.5.10.1.5-2 defines OTA related test parameters, not including test tolerances yet.

Editor's note: will be updated after TT analysis.

5.5.10.1.5-1: NR Cell specific test parameters for UE specific CBW change in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66
Active BWP ID			1
Initial DL BWP Configuration			DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2
Active DL BWP Configuration			DLBWP.1.3
Active UL BWP Configuration			DLBWP.1.3
Initial Condition	Active DL CBW-1 Configuration		DLCBW.1.1
	Active UL CBW-1 Configuration		ULCBW.1.1
Final Condition	Active DL CBW-2 Configuration		DLCBW.1.2
	Active UL CBW-2 Configuration		ULCBW.1.2
PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].

Table 5.5.10.1.5-2: OTA related test parameters for UE specific CBW change test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15 in TS 38.133 [6]
Assumption for UE beams Note 5			Fine
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-112 + TT
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-103 + TT
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note3	-85 + TT
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s / I_{ot}$		dB	18 + TT
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-56 + TT
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.

Note 5: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6]., and does not limit UE implementation or test system implementation.

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot $(i+\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length})$.

All of the above test requirements shall be fulfilled in order for the observed PSCell UE specific CBW change switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.11 Unified TCI state switch delay

5.5.11.0 Minimum conformance requirements

5.5.11.0.1 Minimum conformance requirements for MAC-CE based downlink TCI state switch delay for unified TCI

[TS 38.133, clause 8.15.2]

The downlink TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target downlink TCI state to the completion of active downlink TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target downlink TCI state or QCLed to the target downlink TCI state
  - Downlink TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
  - The UE has sent at least 1 L1-RSRP report for the target downlink TCI state before the downlink TCI state switch command
  - The target downlink TCI state remains detectable during the downlink TCI state switching period
  - The SSB associated with the downlink TCI state remain detectable during the downlink TCI switching period
    - SNR of the downlink TCI state $\geq$ -3dB
    - The SSB can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

Otherwise, the downlink TCI state is unknown.

[TS 38.133, clause 8.15.3]

The requirements in this clause shall apply for DL TCI state switch using separate DL TCI state or joint TCI state of unified TCI state switch framework.

In case that source RS in DL TCI state or joint TCI state is associated with a PCI different from that of the serving cell, the requirements in this clause shall apply if the cell with different PCI satisfies the known cell condition defined in 8.15.1. If the known cell condition is not met, longer delay may be expected.

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive UE-dedicated PDCCH/PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) / *NR slot length*. The UE shall be able to receive UE-dedicated PDCCH/PDSCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$ where T_{HARQ} (in slot) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{SSB\text{-}proc}$ = 2 ms;
- TO_k = 1 if target TCI state is not in the active TCI state list for PDSCH/PDCCH, 0 otherwise.

If the target TCI state is unknown, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive UE-dedicated PDCCH/PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ T_{HARQ} +$3N_{slot}^{subframe,\mu}$ + ($T_{L1\text{-}RSRP}$ +TO_{uk}*($T_{first\text{-}SSB}$+ $T_{SSB\text{-}proc}$)) / *NR slot length*. The UE shall be able to receive UE-dedicated PDCCH/PDSCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$.

Where

- $T_{L1\text{-}RSRP}$ = 0 in FR1 or when the TCI state switching not involving QCL-TypeD in FR2. Otherwise,
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as
- $T_{L1\text{-}RSPR_Measurement_Period_SSB}$ for SSB as specified in clause 9.5.4.1,
  - with the assumption of M=1
  - with T_{Report} = 0
- $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for CSI-RS as specified in clause 9.5.4.2
  - CSI-RS based L1-RSRP measurement only apply for TCI state switch when source RS is associated with serving cell

- configured with higher layer parameter *repetition* set to ON
- with the assumption of M=1 for periodic CSI-RS
- for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
- with T_{Report} = 0

- TO_{uk} = 1 for CSI-RS based L1-RSRP measurement, and 0 for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD
- TO_{uk} = 1 when TCI state switching involves other QCL types only
- $T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;
- The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

5.5.11.0.2 Minimum conformance requirements for MAC-CE based uplink TCI state switch delay for unified TCI

[TS 38.133, clause 8.16.2]

The uplink TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target uplink TCI state to the completion of active uplink TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target uplink TCI state or QCLed to the target uplink TCI state
  - Uplink TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
  - The UE has sent at least 1 L1-RSRP report for the target uplink TCI state before the uplink TCI state switch command
  - The RS configured in target uplink TCI state remains detectable during the uplink TCI state switching period
    - SNR of the RS configured in target uplink TCI state ≥ -3dB
  - The target uplink TCI state remains detectable during the uplink TCI state switching period
  - The SSB associated with the uplink TCI state remain detectable during the uplink TCI switching period
    - SNR of the uplink TCI state ≥ -3dB
    - The SSB can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

Otherwise, the uplink TCI state is unknown.

[TS 38.133, clause 8.16.3]

The requirements in this clause shall apply for UL TCI state switch using separate UL TCI state or joint TCI state of unified TCI state switch framework.

In case that source RS in UL TCI state or joint TCI state is associated with a PCI different from that of the serving cell, the requirements in this clause shall apply if the cell with different PCI satisfies the known cell condition defined in 8.16.1. If the known cell condition is not met, longer delay may be expected.

In case of joint TCI state switch, UE is not expected to transmit on UL based on the target TCI state before UE completes the DL and UL TCI state switch.

For separate UL TCI state switch or joint TCI state switch for PUCCH or PUSCH, or semi-persistent/aperiodic/periodic SRS, when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1, upon receiving PDSCH carrying MAC-CE activation command in slot n on serving cell,

- If target TCI state is known,

- The UE shall be able to transmit uplink signal with the target TCI state in the slot $n+T_{HARQ} + 3N_{slot}^{subframe,\mu} + NM^* (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} + 2ms) / \textit{NR slot length}$.

- If target TCI state is unknown,

  - The UE shall be able to transmit uplink signal with the target TCI state in the slot $n+T_{HARQ} + 3N_{slot}^{subframe,\mu} + (T_{L1\text{-}RSRP} + T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} + 2ms) / \textit{NR slot length}$.

  - The UE shall be able to transmit with the old UL TCI state until slot $n+ T_{HARQ} + 3N_{slot}^{subframe,\mu}$.

Where,

- T_{HARQ} (in slot) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].

- NM = 1, if the target PL-RS is not maintained by the UE, 0 otherwise.

- PL-RS is maintained provided:

  - the target PL-RS is associated with or included in the UL or joint TCI states in the active TCI list for PUSCH/PUCCH/SRS transmissions

  - There are no more than 4 different RS activated as PL-RS per serving cell among all active UL TCI states (UL or joint TCI state) for PUSCH/PUCCH/SRS transmissions

- The target pathloss reference signal remains detectable during TCI state switching period

- SNR of the target pathloss reference signal≥-3dB

- The associated SSBs with the target pathloss reference signal remain detectable during the TCI state switching period.

- SNR of the associated SSB ≥-3dB

- $T_{first_target\text{-}PL\text{-}RS}$ is time to first pathloss RS transmission after L1-RSRP measurement when target TCI state is unknown.

- $T_{first_target\text{-}PL\text{-}RS}$ is time to first pathloss RS transmission after MAC CE command is decoded by the UE for known TCI State.

- $T_{target_PL\text{-}RS}$ is the periodicity of the target pathloss reference signal which would be SSB or NZP CSI-RS when PL-RS is associated with serving cell

- $T_{target_PL\text{-}RS}$ is the periodicity of the target pathloss reference signal which would be SSB when PL-RS is associated with PCI different from serving cell

- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as

  - $T_{L1\text{-}RSPR_Measurement_Period_SSB}$ for SSB as specified in clause 9.5.4.1,

    - with the assumption of M=1

    - with $T_{Report} = 0$

  - $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for CSI-RS as specified in clause 9.5.4.2

    - CSI-RS based L1-RSRP measurement only apply for TCI state switch when source RS is associated with serving cell

    - configured with higher layer parameter *repetition* set to ON

    - with the assumption of M=1 for periodic CSI-RS

    - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*

    - with $T_{Report} = 0$

Editor note: when PL-RS is SSB in FR2, the delay requirement is FFS.

The requirements specified in this clause are applicable if no more than 4 different RSs are activated as PL-RS per serving cell among all active UL (or joint) TCI states.

5.5.11.1 EN-DC FR2 MAC-CE based active joint TCI state switch

Editor's note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.5.11.1.1 Test purpose

The purpose of this test is to verify the MAC-CE based joint TCI state switch delay requirement defined in TS 38.133 [6] clause 8.15.3 and 8.16.3 by a UE capable of beam correspondence without the need for UL beam sweeping.

5.5.11.1.2 Test applicability

This test applies to all types of UE supporting E-UTRA and EN-DC from release 17 onwards and supporting unified TCI state operation.

5.5.11.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.11.0.1 and 5.5.11.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.11.1.

5.5.11.1.4 Test description

There are two cells configured in this test: E-UTRAN PCell (Cell 1) and NR PSCell (Cell 2). This test consists of two successive time periods, with time duration of T1 and T2 respectively.

5.5.11.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.11.1.4.1-1.

Table 5.5.11.1.4.1-1: Supported test configurations for EN-DC FR2 MAC-CE based active joint TCI state switch

Config	Description
5.5.11.1-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.11.1-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.11.1.4.1-2.

Table 5.5.11.1.4.1-2: Initial conditions for EN-DC FR2 MAC-CE based active joint TCI state switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 36.508 [25] clause 4.3.1 for E-UTRA and TS 38.508-1 [14] clause 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.11.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.

Connection Diagram	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.11.1.4.1-3.
2. Message contents are defined in clause 5.5.11.1.4.3.
3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.11.1.4.1-3: General test parameters for EN-DC FR2 MAC-CE based active joint TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel No.		Channel 1	One E-UTRA radio channel is used for this test
NR RF Channel No.		Channel 2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
L1-RSRP reporting period		160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of RS for L1-RSRP reporting		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

5.5.11.1.4.2 Test procedure

During the test PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Prior to the start of the time duration T1, the UE shall be fully synchronized to E-UTRA PCell and NR PSCell. The UE shall be configured with 2 different DLorJoint states for PSCell: Joint TCI state 0 (QCL'd to SSB0) and Joint TCI state 1 (QCL'd to SSB1), in Cell 2 before starting the test. Joint TCI state 0 is indicated as the active joint TCI-state

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
2. Set the parameters of NR Cell 2 according to T1 in Table 5.5.11.1.5-1. Propagation conditions are set according to clause C.2.2. T1 starts. During T1 only SSB0 to which Joint TCI state 0 is QCL'd is transmitted.
3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.11.1.5-1. T2 starts. At the beginning of T2, the SSB1 corresponding to Joint TCI state 1 starts transmitting.
4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.
5. The UE transmits an *RRCReconfigurationComplete* message.
6. The SS sends a MAC-CE to indicate switch to Joint TCI-state 1 in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.
7. If the SS:

a) Receives ACK/NACK on each UL transmission occasion scheduled on Joint TCI state 0 until slot $n+T_{HARQ}+3N_{slot}^{subframe,\mu}$, and

b) Receives ACK/NACK on each UL transmission occasion scheduled on Joint TCI state 1 after slot $n+ T_{HARQ} +3N_{slot}^{subframe,\mu} + (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} + 2ms)$ / *NR slot length*

the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.

8. When T2 expires the SS shall sends a MAC-CE to indicate switch to Joint TCI state 0.
9. Wait 1s for the UE to switch Joint TCI state 0. If the SS receives ACK/NACK on each UL transmission occasion scheduled on Joint TCI state 0 continue to step 11. Otherwise continue to step 10.
10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.11.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.11.1.4.3-1: Common Exception messages for EN-DC FR2 MAC-CE based active joint TCI state switch

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB

Table 5.5.11.1.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
mimoParam-r17 CHOICE {			
setup SEQUENCE {			
additionalPCI-ToAddModList-r17	Not present		
additionalPCI-ToReleaseList-r17	Not present		
unifiedTCI-StateType-r17	joint		
uplink-PowerControlToAddModList-r17 SEQUENCE (SIZE (1..maxUL-TCI-r17)) OF Uplink-powerControl-r17 {	1 entry		
uplink-powerControl-r17[1] SEQUENCE {		Entry 1	
ul-powercontrolId-r17	1		
p0AlphaSetforPUSCH-r17 SEQUENCE {			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
p0AlphaSetforPUCCH-r17 SEQUENCE {			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
p0AlphaSetforSRS-r17 SEQUENCE {			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			

}			
}			
uplink-PowerControlToReleaseList-r17	Not present		
sfnSchemePDCCH-r17	Not present		
sfnSchemePDSCH-r17	Not present		
}			
}			
}			

Table 5.5.11.1.4.3-3: *BWP-UplinkDedicated*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-15			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-UplinkDedicated ::= SEQUENCE {			
pathlossReferenceRSToAddModList-r17 SEQUENCE (SIZE (1..maxNrofPathlossReferenceRSs-r17)) OF PathlossReferenceRS-r17 {	1 entry		
PathlossReferenceRS-r17 [1] SEQUENCE {		Entry 1	
pathlossReferenceRS-Id-r17	0		
referenceSignal-r17 CHOICE {			
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4)	Resource #4 in TRS.2.1	
}			
additionalPCI-r17	Not present		
}			
}			
pathlossReferenceRSToReleaseList-r17	Not present		
}			

Table 5.5.11.1.4.3-4: *PDSCH-Config*

Derivation Path: TS 38.508-1 [14], table 4.6.3-100			
Information Element	**Value/remark**	**Comment**	**Condition**
pdsch-HARQ-ACK-OneShotFeedbackDCI-1-2-r17	Not present		
pdsch-HARQ-ACK-EnhType3DCI-1-2-r17	Not present		
pdsch-HARQ-ACK-EnhType3DCI-Field-1-2-r17	Not present		
pdsch-HARQ-ACK-RetxDCI-1-2-r17	Not present		
pucch-sSCellDynDCI-1-2-r17	Not present		
dl-OrJointTCI-StateList-r17 CHOICE {			
explicitlist SEQUENCE {			
dl-OrJointTCI-StateToAddModList-r17 SEQUENCE (SIZE (1..maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State [1]	TCI-state_1	Entry 1 DLorJoint TCI.State.2	
TCI-State [2]	TCI-state_2	Entry 2 DLorJoint TCI.State.3	
}			
dl-OrJointTCI-StateToReleaseList-r17	Not present		
}			
}			
beamAppTime-r17	Not present		
dummy	Not present		
dmrs-FD-OCC-DisabledForRank1-PDSCH-r17	Not present		
minimumSchedulingOffsetK0-r17	Not present		
harq-ProcessNumberSizeDCI-1-2-v1700	Not present		
harq-ProcessNumberSizeDCI-1-1-r17	Not present		
mcs-Table-r17	Not present		
mcs-TableDCI-1-2-r17	Not present		
xOverheadMulticast-r17	Not present		
priorityIndicatorDCI-4-2-r17	Not present		

sizeDCI-4-2-r17	Not present		
}			

Table 5.5.11.1.4.3-5: *TCI-State_1* (Table 5.5.11.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**
TCI-State ::= SEQUENCE {			
tci-StateId	0		
qcl-Type1 SEQUENCE {			
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			
qcl-Type	typeD		
}			
additionalPCI-r17	Not present		
pathlossReferenceRS-Id-r17	0	TRS.2.1 TDD Resource #4	
ul-powerControl-r17	1		
}			

Table 5.5.11.1.4.3-6: *TCI-State_2* (Table 5.5.11.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**
TCI-State ::= SEQUENCE {			
tci-StateId	1		
qcl-Type1 SEQUENCE {			
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #1		
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #1		
}			
qcl-Type	typeD		
}			
additionalPCI-r17	Not present		
pathlossReferenceRS-Id-r17	0	TRS.2.1 TDD Resource #4	
ul-powerControl-r17	1		
}			

5.5.11.1.5 Test requirement

Tables 5.5.11.1.4.1-3, 5.5.11.1.5-1 and 5.5.11.1.5-2 define the primary level settings including test tolerances for EN-DC FR2 MAC-CE based active TCI state switch.

Table 5.5.11.1.5-1: NR Cell specific test parameters for EN-DC FR2 MAC-CE based active joint TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
Joint TCI State 0		DLorJoint TCI.State.2
Joint TCI State 1		DLorJoint TCI.State.3
TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.2 TRS 2.2 TDD for DLorJoint TCI.State.3
Pathloss RS Configuration		Resource #4 in TRS.2.1 TDD for DLorJoint TCI.State.2 and for DLorJoint TCI.State.3
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 5.5.11.1.5-2: OTA related test parameter for EN-DC FR2 MAC-CE based active joint TCI state switch

Parameter	Unit	Cell 2			
		SSB#0		SSB#1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough for SSB reception			
Noc Note 1	dBm/15 kHz	-95.1			
Noc Note 1	dBm/SCS	-86.1			
Ês/Noc	dB	3.4	3.4	-Infinity	3.4
SS-RSRP Note 2	dBm/120 kHz Note3	-82.7	-82.7	-Infinity	-82.7
Io Note2,Note6	dBm/95.04 MHz Note4	-56.47	-56.47	-61.5	-56.47

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the center of the quiet zone. Note 6: Information about types of UE beam is given in TS 38.133 [6] B.2.1.3 and does not limit UE implementation or test system implementation.

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall

- be able to continue to receive and transmit with Joint TCI state 0 until $n+T_{HARQ}+3N_{slot}^{subframe,\mu}$,

- be able to start receiving and transmitting with Joint TCI state 1 after slot $n+ T_{HARQ} +3N_{slot}^{subframe,\mu} + (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} + 2ms)$ / *NR slot length*

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.11.2 EN-DC FR2 MAC-CE based active uplink TCI state switch

Editor's note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.5.11.2.1 Test purpose

The purpose of this test is to verify the MAC-CE based uplink TCI state switch delay requirement defined in TS 38.133 [6] clause 8.16.3 by a UE capable of beam correspondence without the need for UL beam sweeping.

5.5.11.2.2 Test applicability

This test applies to all types of UE supporting E-UTRA and EN-DC from release 17 onwards and supporting unified TCI state operation.

5.5.11.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.11.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.11.2.

5.5.11.2.4 Test description

There are two cells configured in this test: E-UTRAN PCell (Cell 1) and NR PSCell (Cell 2). This test consists of two successive time periods, with time duration of T1 and T2 respectively.

5.5.11.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.11.2.4.1-1.

Table 5.5.11.2.4.1-1: Supported test configurations for EN-DC FR2 MAC-CE based active uplink TCI state switch

Config	Description
5.5.11.2-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.11.2-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.11.2.4.1-2.

Table 5.5.11.2.4.1-2: Initial conditions for EN-DC FR2 MAC-CE based active uplink TCI state switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 36.508 [25] clause 4.3.1 for E-UTRA and TS 38.508-1 [14] clause 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.11.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.11.2.4.1-3.
2. Message contents are defined in clause 5.5.11.2.4.3.
3. There are one E-UTRAN cell and one NR cell specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.11.2.4.1-3: General test parameters for EN-DC FR2 MAC-CE based active uplink TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel No.		Channel 1	One E-UTRA radio channel is used for this test
NR RF Channel No.		Channel 2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
L1-RSRP reporting period		160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

5.5.11.2.4.2 Test procedure

During the test PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Prior to the start of the time duration T1, the UE shall be fully synchronized to E-UTRA PCell and NR PSCell. The UE shall be configured with 2 different uplink TCI states for PSCell: uplink TCI state 0 (associated to SSB0) and uplink TCI state 1 (associated to SSB1), in Cell 2 before starting the test. Uplink TCI state 0 is indicated as the active uplink TCI-state.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
2. Set the parameters of NR Cell 2 according to T1 in Table 5.5.11.2.5-1. Propagation conditions are set according to clause C.2.2. T1 starts. During T1 only SSB0 to which Uplink TCI state 0 is associated is transmitted.
3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.11.2.5-1. T2 starts. At the beginning of T2, the SSB1 corresponding to uplink TCI state 1 starts transmitting.
4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.
5. The UE transmits an *RRCReconfigurationComplete* message.
6. The SS sends a MAC-CE to indicate switch to uplink TCI-state 1 in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.
7. If the SS:
   a) Receives ACK/NACK on each UL transmission occasion scheduled on Uplink TCI state 0 until slot $n+T_{HARQ}+3N_{slot}^{subframe,\mu}$, and
   b) Receives ACK/NACK on each UL transmission occasion scheduled on Uplink TCI state 1 after slot $n+T_{HARQ}+3N_{slot}^{subframe,\mu}$ + ($T_{first_target\text{-}PL\text{-}RS}$ + 4*$T_{target_PL\text{-}RS}$ + 2ms) / *NR slot length*

   the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.
8. When T2 expires the SS shall sends a MAC-CE to indicate switch to uplink TCI state 0.
9. Wait 1s for the UE to switch to uplink TCI state 0. If the SS receives ACK/NACK on each UL transmission occasion scheduled on uplink TCI state 0 continue to step 11. Otherwise continue to step 10.
10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.11.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.11.2.4.3-1: Common Exception messages for EN-DC FR2 MAC-CE based active uplink TCI state switch

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB

Table 5.5.11.2.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
mimoParam-r17 CHOICE {			
setup SEQUENCE {			

additionalPCI-ToAddModList-r17	Not present		
additionalPCI-ToReleaseList-r17	Not present		
unifiedTCI-StateType-r17	seperate		
uplink-PowerControlToAddModList-r17 SEQUENCE (SIZE (1..maxUL-TCI-r17)) OF Uplink-powerControl-r17 {	1 entry		
uplink-powerControl-r17[1] SEQUENCE {			
ul-powercontrolId-r17	1	Entry 1	
p0AlphaSetforPUSCH-r17 SEQUENCE {			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
p0AlphaSetforPUCCH-r17 SEQUENCE {			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
p0AlphaSetforSRS-r17 SEQUENCE {			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
}			
}			
uplink-PowerControlToReleaseList-r17	Not present		
sfnSchemePDCCH-r17	Not present		
sfnSchemePDSCH-r17	Not present		
}			
}			
}			

Table 5.5.11.2.4.3-3: *BWP-UplinkDedicated*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-15			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-UplinkDedicated ::= SEQUENCE {			
ul-TCI-StateList-r17 CHOICE {			
explicitlist SEQUENCE {			
ul-TCI-ToAddModList-r17 SEQUENCE (SIZE (1..maxUL-TCI-r17)) OF TCI-UL-State-r17 {	2 entries		
TCI-UL-State-r17 [1] SEQUENCE {		Entry 1 UL TCI.State.2	
tci-UL-StateId-r17	0		
servingCellId-r17	Not present		
bwp-Id-r17	Not present		
referenceSignal-r17 CHOICE {			
ssb	SSB-Index of SSB #0		
}			
additionalPCI-r17	Not present		
ul-powerControl-r17	1		
pathlossReferenceRS-Id-r17	0		
}			
TCI-UL-State-r17 [2] SEQUENCE {		Entry 1 UL TCI.State.3	
tci-UL-StateId-r17	1		
servingCellId-r17	Not present		
bwp-Id-r17	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #1		
}			
additionalPCI-r17	Not present		
ul-powerControl-r17	1		
pathlossReferenceRS-Id-r17	0		

} }			
ul-TCI-ToReleaseList-r17	Not present		
} }			
ul-powerControl-r17	Not present		
pucch-ConfigurationListMulticast1-r17	Not present		
pucch-ConfigurationListMulticast2-r17	Not present		
pathlossReferenceRSToAddModList-r17 SEQUENCE (SIZE (1..maxNrofPathlossReferenceRSs-r17)) OF PathlossReferenceRS-r17 {	1 entry		
PathlossReferenceRS-r17 [1] SEQUENCE {		Entry 1	
pathlossReferenceRS-Id-r17	0		
referenceSignal-r17 CHOICE {			
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4)	Resource #4 in TRS.2.1	
}			
additionalPCI-r17	Not present		
} }			
pathlossReferenceRSToReleaseList-r17	Not present		
}			

5.5.11.2.5 Test requirement

Tables 5.5.11.2.4.1-3, 5.5.11.2.5-1 and 5.5.11.2.5-2 define the primary level settings including test tolerances for EN-DC FR2 MAC-CE based active TCI state switch.

Table 5.5.11.2.5-1: NR Cell specific test parameters for EN-DC FR2 MAC-CE based active uplink TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
DL TCI state		DLorJoint TCI.State.0
PL-RS Configuration (CSI-RS#1)		Resource #4 in TRS.2.1 TDD for UL TCI.State.2 Resource #4 in TRS.2.2 TDD for UL TCI.State.3
Uplink TCI State 0		UL TCI.State.2
Uplink TCI State 1		UL TCI.State.3
TRS Configuration		TRS.2.1 TDD
reportQuantity for SSB		ssb-Index-RSRP-Index-r17
reportConfigType for SSB		periodic
reportQuantity for CSI-RS		cri-RSRP-Index-r17
reportConfigType for CSI-RS		periodic
timeRestrictionForChannelMeasurements		configured
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0

EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 5.5.11.2.5-2: OTA related test parameter for EN-DC FR2 MAC-CE based active uplink TCI state switch

Parameter	Unit	Cell 2			
		SSB#0		SSB#1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough for SSB reception			
Noc Note 1	dBm/15 kHz	-95.1			
Noc Note 1	dBm/SCS	-86.1			
Ês/Noc	dB	3.4	3.4	-Infinity	3.4
SS-RSRP Note 2	dBm/120 kHz Note3	-82.7	-82.7	-Infinity	-82.7
Io Note2,Note6	dBm/95.04 MHz Note4	-56.47	-56.47	-61.5	-56.47
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the center of the quiet zone. Note 6: Information about types of UE beam is given in TS 38.133 [6] B.2.1.3 and does not limit UE implementation or test system implementation.					

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall

- be able to continue to receive and transmit PUCCH on uplink TCI state 0 until $n+T_{HARQ}+3N_{slot}^{subframe,\mu}$,

- be able to start transmitting PUCCH on uplink TCI state 1 from slot $n+ T_{HARQ} +3N_{slot}^{subframe,\mu} + (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} + 2ms)$ / *NR slot length*

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.11.3 EN-DC FR2 MAC-CE based active downlink TCI state switch

Editor's note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.5.11.3.1 Test purpose

The purpose of this test is to verify the MAC-CE based downlink TCI state switch delay requirement defined in TS 38.133 [6] clause 8.15.3.

5.5.11.3.2 Test applicability

This test applies to all types of UE supporting E-UTRA and EN-DC from release 17 onwards and supporting unified TCI state operation.

5.5.11.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.5.11.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.5.11.3.

5.5.11.3.4 Test description

There are two cell configured in this test: E-UTRAN PCell (Cell 1) and NR PSCell (Cell 2). This test consists of two successive time periods, with time duration of T1 and T2 respectively.

5.5.11.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.11.3.4.1-1.

Table 5.5.11.3.4.1-1: Supported test configurations for EN-DC FR2 MAC-CE based active downlink TCI state switch

Config	Description
5.5.11.3-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.5.11.3-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.11.3.4.1-2.

Table 5.5.11.3.4.1-2: Initial conditions for EN-DC FR2 MAC-CE based active downlink TCI state switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 36.508 [25] clause 4.3.1 for E-UTRA and TS 38.508-1 [14] clause 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.11.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 5.5.11.3.4.1-3.
2. Message contents are defined in clause 5.5.11.3.4.3.
3. There are one E-UTRAN cell, one NR PSCell and one NR cell with additional PCI different from serving cell (Cell 3) specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.5.11.3.4.1-3: General test parameters for EN-DC FR2 MAC-CE based active downlink TCI state switch

Parameter	Unit	Value	Comment

E-UTRA RF Channel No.		1	One E-UTRA radio channel is used for this test
NR RF Channel No.		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Cell with additional PCI		Cell 3	Cell on RF channel number 3.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	0	
L1-RSRP reporting period		160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

5.5.11.3.4.2 Test procedure

During the test PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and cell with additional PCI (Cell 3) to ensure that the UE would have ACK/NACK sending.

Prior to the start of the time duration T1, the UE shall be fully synchronized to E-UTRA PCell, NR PSCell and cell with additional PCI. The UE is configured with L1-RSRP measurements on cell with additional PCI (Cell 3). The UE shall be configured with 2 different downlink TCI states for PSCell: TCI state 0 (QCL'd to TRS resource set 1, TCI state of which is QCLed to SSB0 of Cell 2) and downlink TCI state 1 (QCL'd to TRS resource set 3, TCI state of which is QCLed to SSB1 of Cell 3), in Cell 2 before starting the test. TCI state 0 is indicated as the active downlink TCI-state.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
2. Set the parameters of NR Cell 2 according to T1 in Table 5.5.11.3.5-1. Propagation conditions are set according to clause C.2.2. T1 starts. During T1 only SSB0 to which PDCCH-TCI state0 is QCL'd is transmitted.
3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 5.5.11.3.5-1. T2 starts. At the beginning of T2, the SSB1 corresponding to downlink TCI state 1 starts transmitting.
4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.
5. The UE transmits an *RRCReconfigurationComplete* message.
6. The SS sends a MAC-CE to indicate switch to downlink TCI-state 1 in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 of cell 2 and SSB1 of cell 3.
7. If the SS:
   a) Receives ACK/NACK on each UL transmission occasion scheduled on downlink TCI state 0 until slot $n+T_{HARQ}+3$ms, and
   b) Receives ACK/NACK on each UL transmission occasion scheduled on downlink TCI state 1 after slot $n+T_{HARQ}+3$ ms + $(T_{first\text{-}SSB} + T_{SSB\text{-}proc})$

   the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.
8. When T2 expires the SS shall sends a MAC-CE to indicate switch to downlink TCI state 0.
9. Wait 1s for the UE to switch to downlink TCI state 0. If the SS receives ACK/NACK on each UL transmission occasion scheduled on downlink TCI state 0 continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.11.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.11.3.4.3-1: Common Exception messages for EN-DC FR2 MAC-CE based active downlink TCI state switch

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB

Table 5.5.11.3.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
mimoParam-r17 CHOICE {			
setup SEQUENCE {			
additionalPCI-ToAddModList-r17	Not present		
additionalPCI-ToReleaseList-r17	Not present		
unifiedTCI-StateType-r17	separate		
uplink-PowerControlToAddModList-r17	Not present		
uplink-PowerControlToReleaseList-r17	Not present		
sfnSchemePDCCH-r17	Not present		
sfnSchemePDSCH-r17	Not present		
}			
}			
}			

Table 5.5.11.3.4.3-3: *PDSCH-Config*

Derivation Path: TS 38.508-1 [14], table 4.6.3-100			
Information Element	**Value/remark**	**Comment**	**Condition**
pdsch-HARQ-ACK-OneShotFeedbackDCI-1-2-r17	Not present		
pdsch-HARQ-ACK-EnhType3DCI-1-2-r17	Not present		
pdsch-HARQ-ACK-EnhType3DCI-Field-1-2-r17	Not present		
pdsch-HARQ-ACK-RetxDCI-1-2-r17	Not present		
pucch-sSCellDynDCI-1-2-r17	Not present		
dl-OrJointTCI-StateList-r17 CHOICE {			
explicitlist SEQUENCE {			
dl-OrJointTCI-StateToAddModList-r17 SEQUENCE (SIZE (1..maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State [1]	TCI-state_1	Entry 1 DLorJoint TCI.State.2	
TCI-State [2]	TCI-state_2	Entry 2 DLorJoint TCI.State.3	
}			
dl-OrJointTCI-StateToReleaseList-r17	Not present		
}			
}			

beamAppTime-r17	Not present		
dummy	Not present		
dmrs-FD-OCC-DisabledForRank1-PDSCH-r17	Not present		
minimumSchedulingOffsetK0-r17	Not present		
harq-ProcessNumberSizeDCI-1-2-v1700	Not present		
harq-ProcessNumberSizeDCI-1-1-r17	Not present		
mcs-Table-r17	Not present		
mcs-TableDCI-1-2-r17	Not present		
xOverheadMulticast-r17	Not present		
priorityIndicatorDCI-4-2-r17	Not present		
sizeDCI-4-2-r17	Not present		
}			

Table 5.5.11.3.4.3-4: *TCI-State_1* (Table 5.5.11.3.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**
TCI-State ::= SEQUENCE {			
tci-StateId	0		
qcl-Type1 SEQUENCE {			
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			
qcl-Type	typeD		
}			
additionalPCI-r17	Not present		
pathlossReferenceRS-Id-r17	Not present		
ul-powerControl-r17	Not present		
}			

Table 5.5.11.3.4.3-5: *TCI-State_2* (Table 5.5.11.3.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**
TCI-State ::= SEQUENCE {			
tci-StateId	1		
qcl-Type1 SEQUENCE {			
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #1		
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #1		
}			
qcl-Type	typeD		
}			
additionalPCI-r17	Not present		
pathlossReferenceRS-Id-r17	Not present		
ul-powerControl-r17	Not present		
}			

5.5.11.3.5 Test requirement

Tables 5.5.11.3.4.1-3, 5.5.11.3.5-1 and 5.5.11.3.5-2 define the primary level settings including test tolerances for EN-DC FR2 MAC-CE based active TCI state switch.

Table 5.5.11.3.5-1: NR Cell specific test parameters for EN-DC FR2 MAC-CE based active downlink TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
DL TCI State 0		DLorJoint TCI.State.0
DL TCI State 1		DLorJoint TCI.State.1
UL TCI State 0		UL TCI.State.0
UL TCI State 1		UL TCI.State.1
Pathloss RS Configuration		Resource #4 in TRS.2.1 TDD
TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.0 TRS.2.2 TDD for DLorJoint TCI.State.1
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]		

Table 5.5.11.3.5-2: OTA related test parameter for EN-DC FR2 MAC-CE based active downlink TCI state switch

Parameter	Unit	Cell 2		Cell 3	
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
$\hat{E}_S$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	- Infinity	-80.6
$\hat{E}_s/I_{ot}$ BB Note 7	dB	8.3	8.3	-Infinity	8.3

Io[Note2]	dBm/95.04 MHz [Note4]	-56.0	-56.0	- Infinity	-56.0

Note 1: Void
Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall

- be able to continue to receive on DL TCI state 0 till n+ T_{HARQ} +$3N_{slot}^{subframe,\mu}$,
- be able to start receiving on DL TCI state 1 after n+ T_{HARQ} +(5 ms + $T_{first\text{-}SSB}$) / *NR slot length*

The rate of correct events observed during repeated tests shall be at least 90%.

5.5.12 PSCell activation and deactivation delay

5.5.12.0 Minimum conformance requirements

5.5.12.0.1 Minimum conformance requirements for PSCell activation and deactivation delay

[TS 36.133, clause 7.38]

The requirements in this clause shall apply for the UE configured with one deactivated SCG in EN-DC, and when PScell in one SCG is being activated.

The delay within which the UE shall be able to activate the deactivated SCG depends upon the specified conditions.

Upon receiving SCG activation command in slot *n*, the UE shall be capable to transmit PRACH preamble or PUCCH towards PSCell no later than in slot n + $\frac{T_{activation_time}}{NR\ slot\ length}$,

where:

$T_{activation_time} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2$ ms

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [13].

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period. When PSCell is activated from deactivated state, if any PSCell parameter is modified, $T_{processing}$ = [20ms]. Otherwise, $T_{processing}$ = [5 or 10ms].

T_{search} is the time for AGC settling and PSS/SSS detection.

For RACH based PSCell activation, if the target cell is a known NR FR1 or FR2 PScell, T_{search} = 0 ms. If the target cell is an unknown FR1 PScell and Es/Iot ≥ -2 dB, T_{search} = 3* T_{rs} ms. If the target cell is an unknown FR2 PScell and Es/Iot ≥ -2 dB, then T_{search} = 24* T_{rs} ms.

For RACH-less based PSCell activation, if RLM and BFD are configured and no failure is detected, T_{search} = 0 ms if the target cell is a known FR2 PScell. There are no requirements if PSCell is unknown.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target PSCell. T_{Δ} = 1*Trs ms.

T_{IU}: When RACH based PSCell activation is configured, it is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{IU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [8].

When RACH-less based PSCell activation is configured, it is the uncertainty in acquiring the first PUSCH transmission occasion [or SR on PUCCH].

Trs is the SMTC periodicity of the PScell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5.

In FR1 and FR2, the PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the SCG activation command:
  - the UE has sent a valid measurement report for the PSCell being activated and
  - One of the SSBs measured from the PSCell being activated remains detectable according to the cell identification conditions specified in clause 9.3.
- One of the SSBs measured from PSCell being activated also remains detectable during the PSCell activation delay T_{config_PSCell} according to the cell identification conditions specified in clause 9.3.

otherwise, it is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [13].

The requirements in this clause shall apply for a UE which is configured with at least PCell and PSCell.

Upon receiving SCG deactivation command in subframe n, the UE shall accomplish the deactivation actions specified in TS 38.331 [13] no later than in slot $n + \frac{T_{RRC_delay}}{\text{NR slot length}}$:

where

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [13].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [13].

FFS: MAC CE based SCG deactivation delay requirements.

The normative reference for this requirement is TS 36.133 [23] clause 7.38.2 and 7.38.3.

5.5.12.1 EN-DC FR2 PSCell activation and deactivation delay

Editor's Note: This test case is incomplete in following aspects:

- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

5.5.12.1.1 Test purpose

This test is to verify that the NR PSCell activation and deactivation delay under EN-DC are within the requirements, for the case when UE configured with one deactivated SCG and when PScell in one SCG is being activated where the PSCell is known by the UE at the time of activation.

5.5.12.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 17 onwards and supporting activation and deactivation on SCG.

5.5.12.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 5.5.12.0.1.

The normative reference for this requirement is TS 36.133 [23] 7.38 and TS 38.133 [6] clause A.5.5.12.1.

5.5.12.1.4 Test description

5.5.12.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.12.1.4.1-1.

Table 5.5.12.1.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.12.1.4.1-2 and Table 5.5.12.1.4.1-3.

Table 5.5.12.1.4.1-2: Initial conditions for PSCell activation and deactivation

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.1-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.1.1.2-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 5.5.12.1.4.1-3: General Test Parameters for PSCell activation and deactivation

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	SCell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	PSCell deactivated on RF channel number 2.
DRX			OFF	Continuous monitoring of primary cell
Scheduling request resource priodicity			20ms	At the starting of period T3, UE sends a SR on PUCCH for PSCell
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	1	During this time the UE adds the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.
T4		s	1	During this time the UE releases the PSCell.

1. Message contents are defined in clause 5.5.12.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is NR FR2 cells. Cell 2 is the deactivated PSCell.
3. Downlink signals for NR cell are initially set up according to clause C.2.1.

4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.5.12.1.4.2 Test procedure

Same as in 4.5.10.1.4.2 with the following exception:

2. Set the parameters according to T1 in Tables 5.5.12.1.5-1 and A.6.1.2-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add and deactivate NR cell (PSCell), with the message content exceptions defined in clause 5.5.12.1.4.3.

5.5.12.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3 with following exceptions:

Table 5.5.12.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table 4.6.3-19 in TS 38.508-1 [14] with condition RLM_BFD_PSCell Table 4.6.3-167 in TS 38.508-1 [14] with condition SCG_Activate Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition SSB.2 FR2 and SMTC.2

Table 5.5.12.1.4.3-2: *SchedulingRequestResourceConfig*

Derivation Path: TS 38.508-1 [14], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequestResourceConfig ::= SEQUENCE {			
schedulingRequestResourceId	SchedulingRequestResourceId		
schedulingRequestID	SchedulingRequestId		
periodicityAndOffset CHOICE {			
sl80	9	With SCS = kHz120 results in repetition every 10 ms	SCS120
}			
}			

5.5.12.1.5 Test requirement

Table 5.5.12.1.5-1 and Table 5.5.12.1.5-2 defines the primary level settings including test tolerances for all tests.

Table 5.5.12.1.5-1: Cell Specific Parameters for PSCell activation and deactivation

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA Channel Number		1,2	1			
NR Channel Number		1,2	2			
Duplex Mode		1,2	TDD			
TDD configuration		1,2	TDDConf.3.1			
$BW_{channel}$	MHz	1,2	100: NRB,c = 66			
Data RBs allocated		1,2	48			
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1			

TRS Configuration		1	TRS.2.1 TDD
PDSCH/PDCCH TCI state		1	TCI.State.2
PDSCH Reference measurement channel		1,2	SR.3.3 TDD
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD
OCNG Patterns		1,2	OP.3
SSB configuration		1,2	SSB.2 FR2
SMTC configuration		1,2	SMTC.2
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120
TRS Configuration		1,2	TRS.2.1 TDD
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD
reportConfigType		1,2	periodic
reportQuantity		1,2	cri-RI-PMI-CQI
CSI reporting periodicity	slot	1,2	40
CSI reporting offset	slot	1,2	4
EPRE ratio of PSS to SSS	dB	1,2	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition		1,2	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]			

Table 5.5.12.1.5-2: OTA related test parameters

Parameter	Unit	Cell 2			
		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams[Note 6]		Rough			
$\hat{E}_s/N_{oc}$ Ês [Note2]	dBm/SCS	-81			
SSB_RP[Note2, Note 4]	dBm/SCS	-81			
$\hat{E}_s/I_{ot}$ BB [Note 2, Note 7]	dB	4.88			
Io[Note 2, Note 4]	dBm/95.04 MHz	-56.41			
Note 1: Void Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: Void Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.					

The UE performs RACH-less based PSCell activation. UE shall transmit the SR on PUCCH for PSCell at latest 65 ms[Note1] into T2.

The UE shall send at least one PUSCH on PSCell during T3.

The UE shall stop transmit PUSCH for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell activation delay and PSCell deactivation delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.38 in TS 36.133 [23]:

$T_{activation_time} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2$ ms

Where:

T_{RRC_delay} = 20ms

$T_{processing}$ = 5ms

T_{search} = 0 ms

T_{Δ} = 20ms

T_{IU}= max 20 ms

5.5.13 Conditional PSCell addition and release delay

5.5.13.1 EN-DC FR2 Addition and Release Delay of NR PSCell

Editor's Note: This test case is incomplete in following aspects:

- This test case is incomplete for Test frequency f > 40.8 GHz
- This test case is incomplete for UE power class other than PC3.

5.5.13.1.1 Test purpose

The purpose of this test is to verify that the conditional NR PSCell addition and release delays under EN-DC are within the requirements.

5.5.13.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 17 onwards and supporting Conditional PSCell addition.

5.5.13.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.11.0.

The normative reference for this requirement is TS 38.133 [6] clause 8.9A.

5.5.13.1.4 Test description

5.5.13.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.5.13.1.4.1-1.

Table 5.5.13.1.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz

2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.5.13.1.4.1-2.

Table 5.5.13.1.4.1-2: Initial conditions for EN-DC FR2 Addition and Release Delay of NR PSCell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.13.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 5.5.13.1.4.1-3: General Test Parameters for Conditional PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-118	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	s	0	
DRX			OFF	Continuous monitoring of primary cell
Gap pattern ID			gp0	
PRACH configuration on cell2			FR2 configuration 2	Captured in A.3.8.3.2
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	<7	During this time the UE adds the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.
T4		s	1	During this time the UE releases the PSCell.

1. The test parameters are given in Table 5.5.13.1.4.1-3.

2. Message contents are defined in clause 5.5.13.1.4.3.

3. There are two cells in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier, and Cell 2 is the NR PSCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.2-1 for this test. Cell 2 is configured according to clause C.1.1 and C.1.2.

5.5.13.1.4.2 Test procedure

The test consists of four successive time periods with duration of T1, T2, T3 and T4. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC.

During T1 only Cell 1 is known to the UE. NR shall configure a condition implying PSCell addition (Cell 2) during T1, at a time earlier than T_{RRC_delay} before the beginning of T2.

Starting T2, Cell 2 becomes detectable. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T3. The test system shall observe the periodic reporting of CSI for PSCell during T3.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T3, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall set the parameters according to Table 5.5.13.1.5-1 as appropriate. T1 starts.

3. The SS shall transmit an *RRCConnectionReconfiguration* message with condition CPA according to TS 36.508 [25] Table 4.6.1-8 including RRCConnectionReconfiguration* message and associated execution condition. The RRCConnectionReconfiguration* message contains PSCell configuration in RRCReconfiguration**. And measurement gap pattern #0 is configured for the UE.

4. The UE shall transmit an RRCConnectionReconfigurationComplete message. T1 expiring.

5. T2 starts. The execution condition of PSCell (Cell2) becomes satisfied, the UE applies *RRCConnectionReconfiguration** message and releases measurement gap corresponding to PSCell (Cell2) and sends an *RRCConnectionReconfigurationComplete** message with condition MCG_and_SCG and CPA, including NR *RRCReconfigurationComplete*** message for the selected candidate PSCell.

6. The UE shall send PRACH to PSCell no later than $T_{config_PSCell_Addition_Conditional}$ from the start of T2, otherwise increase the number of failed iterations by one, switch off the UE and continue with step 11.

7 During T3 the UE shall send at least one CSI report for PSCell with non-zero CQI index, otherwise increase the number of failed iterations by one, switch off the UE and continue to step 11.

8. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell) after the UE has send at least one CQI report with non-zero CQI index for PSCell (Cell 2).

9. The UE shall transmit an *RRCConnectionReconfigurationComplete* message. T4 starts.

10. The UE shall stop sending CSI reports for PSCell no later than 20ms from the start of T4, if so increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.

11. Set Cell 2 physical cell identity = [((current cell 2 physical cell identity + 1) mod 1008)] for next iteration of the test procedure loop.

12. If the UE is not switched off, the SS shall transmit an RRCConnectionRelease message to release the RRC connection then, the SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State E-UTRA RRC_CONNECTED with generic parameter Connectivity E-UTRA/EPC. If paging succeeds, go to step 14, otherwise switches off the UE.

13. Switches on the UE and ensures the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

14. Repeat step 2-13 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.5.13.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.5.13.1.4.3-1: Common Exception messages for EN-DC FR2 Addition and Release Delay of NR PSCell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	3 Table H.3.4-5 with condition Pattern#0 for step 3 Table H.3.4-4 with condition GAPLESS for step 7 Table H.3.4-6 with condition SMTC.2 and SSB.2 FR2

Table 5.5.13.1.4.3-2: RRCConnectionReconfiguration (step 3)

Derivation Path: 36.508 [25], Table 4.6.1-8 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
c1 CHOICE{			
rrcConnectionReconfiguration-r8 ::= SEQUENCE {			
measConfig	MeasConfig-DEFAULT	Table 5.5.13.1.4.3--3	
}			
}			
}			
}			

Table 5.5.13.1.4.3-3: MeasConfig-DEFAULT

Derivation Path: Table H.3.4-4 with Condition INTER-RAT NR			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig-DEFAULT ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfigId	1		
reportConfig CHOICE {			
reportConfigInterRAT SEQUENCE {			
condReconfigurationTriggerNR-r17 SEQUENCE {			
condEventId CHOICE {			
condEventB1-NR-r17 SEQUENCE {			
b1-ThresholdNR-r17 CHOICE {			
nr-RSRP-r15	39		
}			
hysteresis-r17	0		
timeToTrigger-r17	ms0		
}			
}			
}			
}			
}			
}			
}			

5.5.13.1.5 Test requirement

Table 5.5.13.1.5-1 and Table 5.5.13.1.5-2 define the primary level settings including test tolerances.

Table 5.5.13.1.5-1: Cell Specific Parameters for Conditional PSCell Addition and Release

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA Channel Number		1,2	1			
NR Channel Number		1,2	2			
Duplex Mode		1,2	TDD			
TDD configuration		1,2	TDDConf.3.1			
$BW_{channel}$	MHz	1,2	100: $N_{RB,c}$ = 66			
Data RBs allocated		1,2	48			
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1			
TRS Configuration		1	TRS.2.1 TDD			
PDSCH/PDCCH TCI state		1	TCI.State.2			
PDSCH Reference measurement channel		1,2	SR.3.3 TDD			
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD			
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD			
OCNG Patterns		1,2	OP.3			
SSB configuration		1,2	SSB.2 FR2			
SMTC configuration		1,2	SMTC.2			
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120			
TRS Configuration		1,2	TRS.2.1 TDD			
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD			
reportConfigType		1,2	periodic			
reportQuantity		1,2	cri-RI-PMI-CQI			
CSI reporting periodicity	slot	1,2	40			
CSI reporting offset	slot	1,2	4			
EPRE ratio of PSS to SSS	dB	1,2	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
Propagation condition		1,2	No external noise (Note 1)			
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]						

Table 5.5.13.1.5-2: OTA related test parameters

Parameter	Unit	Cell 2			
		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams Note 6		Rough			
$\hat{E}s$ Note2	dBm/SCS	-∞	-81		
SSB_RP Note2, Note 4	dBm/SCS	-∞	-81		
$\hat{E}_s / I_{ot}$ BB Note 2, Note 7	dB	-∞	4.88		

Io Note 2, Note 4	dBm/95.04 MHz	N/A	-56.41
Note 1: Void Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: Void Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.			

$T_{RRC_delay} + T_{Event_DU}$ occurs during T1 as the PSCell addition condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall transmit the PRACH to PSCell (Cell 2) less than $T_{config_PSCell_Addition_Conditional}$ Note1 into T2.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T3.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T3

The UE shall stop sending CSI reports for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay during T2 can be expressed as follows:

$$T_{config_PSCell_Addition_Conditional} = T_{measure} + T_{UE_preparation} + T_{processing} + T_{\Delta} + T_{PSCell_DU} + 2\ ms$$

Where:

$T_{measure}$ = 6720ms for power class 1 or 4160 for power class 2/3/4

$T_{UE_preparation}$ = 10ms

$T_{processing}$ = 40ms

T_{Δ} = 20ms

T_{PSCell_DU} = 1*10+10 = 20 ms

5.6 Measurement procedures

5.6.1 Intra-frequency measurements

5.6.1.0 Minimum conformance requirements

5.6.1.0.1 Minimum conformance requirements for event-triggered measurement without gap

[TS38.133, clause 9.2.2]

The requirements in Section 9.2 apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in Sections 10.1.2 and 10.1.3 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in Sections 10.1.7 and 10.1.8 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in Sections 10.1.12 and 10.1.13 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.

[TS38.133, clause 9.2.4.3]

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.2.1, 10.1.3.1, 10.1.7.1, 10.1.8.1, 10.1.12.1 and 10.1.13.1, respectively.

The UE shall not send any event triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify\ intra\ without\ index}$ defined in clause 9.2.5.1 or clause 9.2.6.2. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ defined in clause 9.2.5.1 or clause 9.2.6.2. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index}$ or $T_{identify\ intra\ with\ index}$ defined in clause 9.2.5.1 or clause 9.2.6.2 becomes undetectable for a period and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra}$ provided the timing to that cell has not changed more than ± 3200 Tc while the measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

[TS38.133-f60, clause 9.2.5.1]

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})\ ms$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 5.6.1.0.1-1

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 5.6.1.0.1-2

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined

-according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when intra frequency SMTC is fully non overlapping or partially overlapping with measurement gaps, or according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps, i.e. when intra frequency SMTC is fully overlapping with measurement gaps.

-if the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the assumed periodicity of intra frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the

assumed periodicity of intra frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

$M_{pss/sss_sync_w/o_gaps}$: For a UE supporting FR2 power class 1, M_{pss/sss_sync}=40. For a UE supporting power class 2, $M_{pss/sss_sync_w/o_gaps}$ =24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync_w/o_gaps}$ =24. For a UE supporting FR2 power class 4, $M_{pss/sss_sync_w/o_gaps}$ =24

$M_{meas_period_w/o_gaps}$: For a UE supporting power class 1, $M_{meas_period_w/o_gaps}$ =40. For a UE supporting FR2 power class 2, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting power class 3, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting power class 4, $M_{meas_period_w/o_gaps}$ =24.

When intra frequency SMTC is fully non overlapping with measurement gaps or intra frequency SMTC is fully overlapping with MGs, Kp=1

When intra frequency SMTC is partially overlapping with measurement gaps, Kp = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP

If the higher layer signalling in TS38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$

For FR2, if *SSB-ToMeasure* is configured, when all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting outside measurement gap is fully non-overlapping with the SSB symbols indicated by *SSB-ToMeasure* and 1 symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, $K_{layer1_measurement}$= 1, otherwise $K_{layer1_measurement}$=1.5. If *SSB-ToMeasure* is not configured, when any of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting outside measurement gap is fully overlapping with intra-frequency SMTC, $K_{layer1_measurement}$= 1.5, otherwise $K_{layer1_measurement}$=1.

If SCG DRX is in use, intra frequency cell identification requirements specified in Table 5.6.1.0.1-1 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 5.6.1.0.1-1: Time period for PSS/SSS detection, (Frequency range FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x $M_{pss/sss_sync_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

[TS38.133, clause 9.2.5.2]

The measurement period for intra frequency measurements without gaps is as shown in table 5.6.1.0.1-2. If the higher layer signalling in TS38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{SSB_measurement_period_intra}$

If SCG DRX is in use, intra frequency measurement period requirements specified in Table 5.6.1.0.1-2 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 5.6.1.0.1-2: Measurement period for intrafrequency measurements without gaps(Frequency FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, ceil($M_{meas_period_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x $M_{meas_period_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$

DRX cycle>320ms	ceil($M_{meas_period_w/o_gaps}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

The normative reference for this requirement is TS 38.133 [6] clause 9.2.2, 9.2.4.3, 9.2.5.1, 9.2.5.2.

5.6.1.0.2 Minimum conformance requirements for event-triggered measurement with gap

[TS38.133, clause 9.2.2]

The requirements in Section 9.2 apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in Sections 10.1.2 and 10.1.3 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in Sections 10.1.7 and 10.1.8 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in Sections 10.1.12 and 10.1.13 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.

[TS38.133, clause 9.2.4.3]

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.2.1, 10.1.3.1, 10.1.7.1, 10.1.8.1, 10.1.12.1 and 10.1.13.1, respectively.

The UE shall not send any event triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify\ intra\ without\ index}$ defined in clause 9.2.5.1 or clause 9.2.6.2. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ defined in clause 9.2.5.1 or clause 9.2.6.2. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index}$ or $T_{identify\ intra\ with\ index}$ defined in clause 9.2.5.1 or clause 9.2.6.2 becomes undetectable for a period and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra}$ provided the timing to that cell has not changed more than ± 3200 Tc while the measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

[TS38.133, clause 9.2.6.2]

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index.}$ The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})\ ms$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 5.6.1.0.2-1

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 5.6.1.0.2-2

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

$M_{pss/sss_sync_with_gaps}$: For a UE supporting FR2 power class 1, $M_{pss/sss_sync\ with_gaps}$=40. For a UE supporting FR2 power class 2, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting power class 4, $M_{pss/sss_sync\ with_gaps}$ =24

$M_{meas_period_with_gaps}$: For a UE supporting power class 1, $M_{meas_period_with_gaps}$ =40. For a UE supporting power class 2, $M_{meas_period_with_gaps}$ =24. For a UE supporting power class 3, $M_{meas_period_with_gaps}$ =24. For a UE supporting power class 4, $M_{meas_period\ with_gaps}$ =24.

If the higher layer signalling in TS 38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$.

If SCG DRX is in use, intrafrequency cell identification requirements specified in Table 5.6.1.0.2-1 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 5.6.1.0.2-1: Time period for PSS/SSS detection (Frequency range FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, $M_{pss/sss_sync_with_gaps}$ x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x $M_{pss/sss_sync_with_gaps}$) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	$M_{pss/sss_sync_with_gaps}$ x max(MGRP, DRX cycle) x $CSSF_{intra}$

[TS38.133, clause 9.2.6.3]

The measurement period for FR2 intra frequency measurements with gaps is as shown in table 5.6.1.0.2-2.

If SCG DRX is in use, intrafrequency measurement period requirements specified in Table 5.6.1.0.2-2 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 5.6.1.0.2-2: Measurement period for intrafrequency measurements with gaps(Frequency Range FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, $M_{meas_period\ with_gaps}$ x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x $M_{meas_period\ with_gaps}$) x max(MGRP, SMTC period, DRX cycle)) Note 1 x $CSSF_{intra}$
DRX cycle>320ms	$M_{meas_period\ with_gaps}$ x max(MGRP, DRX cycle) x $CSSF_{intra}$

The normative reference for this requirement is TS 38.133 [6] clause 9.2.2, 9.2.4.3, 9.2.6.2, 9.2.6.3.

5.6.1.1 EN-DC FR2 event-triggered reporting without gap in non-DRX

Editor's Note: This test case has been completed for the following configurations:

-Test frequency f ≤ 40.8 GHz

-UE PC1 PC3

This test case is incomplete for UE power classes other than PC1 and PC3

This test case is incomplete for test frequencies > 40.8 GHz

5.6.1.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event within intra-frequency cell search without gap under non-DRX. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 [6] clause 9.2.5.1 and 9.2.5.2

5.6.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 forward, supporting EN-DC.

5.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.1.1.

5.6.1.1.4 Test description

5.6.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.1.1.4.1-1.

Table 5.6.1.1.4.1-1: Supported test configurations for EN-DC FR2 event-triggered reporting without gap under non-DRX

Configuration	Description
5.6.1.1-1	LTE FDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.1-2	LTE TDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.1-3	LTE FDD, 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.1-4	LTE TDD, 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 5.6.1.1.4.1-2.

Table 5.6.1.1.4.1-2: Initial conditions for EN-DC FR2 event-triggered reporting without gap under non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	TBD		

1. The test parameters for PSCell and neighbour cell are given in Table 5.6.1.1.4.1-3 below.

2. Message contents are defined in clause 5.6.1.1.4.3.

3. There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The power levels and settings for Cell 1 are set according to Annex A.6.

Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and Cell 3 are set according to clause C.1.1 and C.1.2.

Table 5.6.1.1.4.1-3: General test parameters for EN-DC FR2 intra-frequency event triggered reporting tests without gap under non-DRX

Parameter	Unit	Config	Value	Comment
Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)	
Neighbour cell		1~4	Cell 3	Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3	One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
SMTC configuration		1~4	SMTC.1	
A3-Offset	dB	1~4	-11	
CP length		1~4	Normal	
Hysteresis	dB	1~4	0	
Time To Trigger	s	1~4	0	
Filter coefficient		1~4	0	L3 filtering is not used
DRX		1~4	OFF	
Time offset between Cell 1 and Cell 2		1~4	3 µs	Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3 µs	Synchronous cells
T1	s	1~4	5	
T2	s	1~4	5	

5.6.1.1.4.2 Test procedure

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell.

In the measurement control information a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.1.1.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.1.1.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 1442 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.6.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.1.1.4.3-1: Common Exception messages EN-DC FR2 intra frequency event triggered reporting tests without gap under non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with A3-offset = -11dB Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM Table H.3.4-1 Table H.3.4-2

Table 5.6.1.1.4.3-2: MeasObjectNR (Step 3, test procedure)

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO, Synchronous cells and NOT SS-SINR			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
ssbSubcarrierSpacing	SubcarrierSpacing specified in 38.508-1 [14] Table 7.3.1-3a with condition SSB.3 FR2		5.6.1.1-1, 5.6.1.1-2
	SubcarrierSpacing specified in 38.508-1 [14] Table 7.3.1-3a with condition SSB.4 FR2		5.6.1.1-3, 5.6.1.1-4
smtc1	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure CHOICE {			
setup CHOICE {			
longBitmap	11000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000	SSB#0 and SSB#1	
}			
}			
}			
}			
cellsToAddModList SEQUENCE (SIZE (1..maxNrofCellMeas)) OF CellsToAddMod {	1 entry		
CellsToAddMod[1] SEQUENCE {		entry 1	
physCellId	PhysCellId of Cell 3		
cellIndividualOffset SEQUENCE {			
rsrpOffsetSSB	dB16		
rsrqOffsetSSB	Not present		
sinrOffsetSSB	Not present		

rsrpOffsetCSI-RS	Not present		
rsrqOffsetCSI-RS	Not present		
sinrOffsetCSI-RS	Not present		
}			
}			
}			
}			

5.6.1.1.5 Test requirement

Tables 5.6.1.1.4.1-3, 5.6.1.1.5-1 and 5.6.1.1.5-2 define the primary level settings including test tolerances for EN-DC FR2 event triggered reporting test without gap under non-DRX.

Table 5.6.1.1.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap under non-DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1~4	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1,2	24		24	
		3,4	48		48	
Initial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1~4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1~4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1~4	SSB		SSB	
PDSCH RMC configuration		1,2	SR.3.2 TDD		N/A	
		3,4	SR.3.3 TDD			
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		N/A	
		3,4	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		N/A	
		3,4	CCR.3.7 TDD		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1~4	120		120	
OCNG Patterns		1~4	OP.5		N/A	
TRS configuration		1~4	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		1~4	TCI.State.2		N/A	
cellIndividualOffset	dB	1~4	N/A		16	
SSB configuration		1, 2	SSB.3 FR2		SSB.7 FR2	
		3, 4	SSB.4 FR2		SSB.8 FR2	
Propagation Condition		1~4	No external noise (NOTE 1)			
NOTE 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].						

Table 5.6.1.1.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap under non-DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 3 defined in A.9.3			
			AoA1		AoA2	
Assumption for UE beams[Note 4]		1~4	Rough		Rough	

E_S	dBm/SCS	1, 2	-89		-89	
		3, 4	-86		-86	
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1~4	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1, 2	-89	-89	-Infinity	-89
		3, 4	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1,2	-64.41	-64.41	-Infinity	-64.41
		3,4	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA	1~4	Defined in Figure 5.6.1.1.5-1	Time multiplexing of the downlink transmissions from each AoA		1~4	

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1440 ms from the beginning of time period T2.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured shall be less than a total of 1442 ms in this test case (note: this gives a total measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

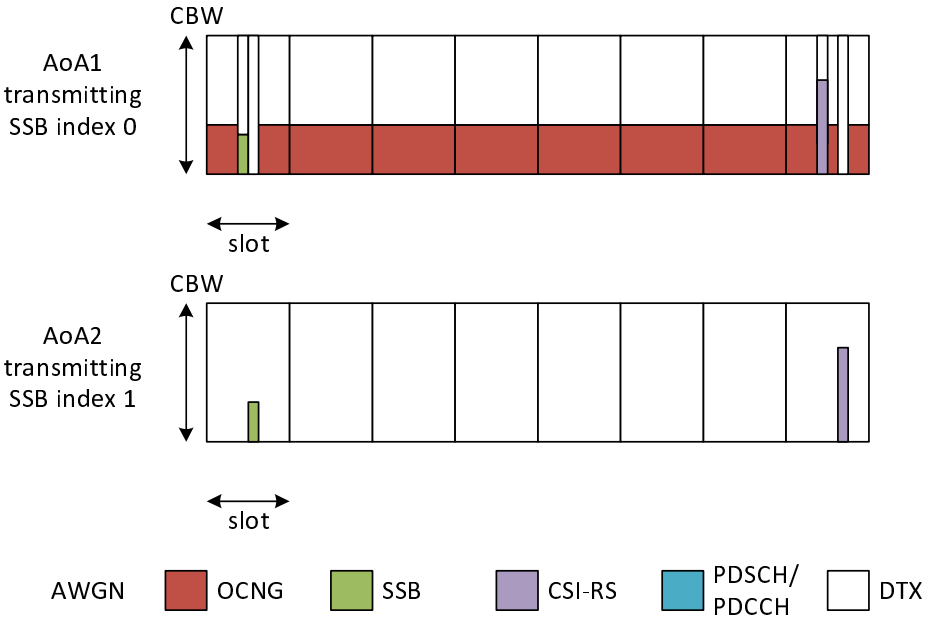

Figure 5.6.1.1.5-1: Time multiplexed downlink transmissions (Config 1,2 example)

5.6.1.2 EN-DC FR2 event-triggered reporting without gap in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC1, PC3

- The test is incomplete for UE power classes other than PC1 and PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test is incomplete for test frequencies > 40.8 GHz5.6.1.2.1 Test purpose

To verify the UE's ability to make a correct reporting of an event within intra-frequency cell search without gap in DRX. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 [6] clause 9.2.5.1 and 9.2.5.2

5.6.1.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 forward, supporting EN-DC and long DRX cycle.

5.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.1.2.

5.6.1.2.4 Test description

5.6.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.1.2.4.1-1.

Table 5.6.1.2.4.1-1: Supported test configurations for EN-DC FR2 event-triggered reporting without gap in DRX

Configuration	Description
5.6.1.2-1	LTE FDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.2-2	LTE TDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.2-3	LTE FDD, 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.2-4	LTE TDD, 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 5.6.1.2.4.1-2.

Table 5.6.1.2.4.1-2: Initial conditions for EN-DC FR2 event-triggered reporting without gap in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.3	
Exceptions to connection diagram	TBD		

1. The test parameters for PSCell and neighbour cell are given in Table 5.6.1.2.4.1-3 below.

2. Message contents are defined in clause 5.6.1.2.4.3.

3. There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and Cell 3 are set according to clause C.1.1 and C.1.2.

Table 5.6.1.2.4.1-3: General test parameters for EN-DC FR2 intra-frequency event triggered reporting tests without gap in DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)		
Neighbour cell		1~4	Cell 3		Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3		One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
SMTC configuration		1~4	SMTC.1		
A3-Offset	dB	1~4	-7 (Note1)		
CP length		1~4	Normal		
Hysteresis	dB	1~4	0		
Time To Trigger	s	1~4	0		
Filter coefficient		1~4	0		L3 filtering is not used
DRX		1~4	DRX.1	DRX. 7	DRX related parameters are defined in Table 5.6.1.2.5-2
Time offset between Cell 1 and Cell 2		1~4	3 µs		Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3 µs		Synchronous cells
T1	s	1~4	5		
T2	s	1~4	10	52	
NOTE: Test tolerance of -1dB applied					

5.6.1.2.4.2 Test procedure

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell.

In the measurement control information a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.1.2.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.1.2.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than X ms for Test 1 and Y ms for Test 2, then the number of successful tests is increased by one. If the UE fails to

report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X is

- 7202 for UE supporting power class 1,
- 4322 for UE supporting power class 2, 3 or 4.

And Y is

- 51202 for UE supporting power class 1,
- 30722 for UE supporting power class 2, 3 or 4.

7. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

10. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5].

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

12. Repeat step 1-11 for each sub-test in Table 5.6.1.2.4.1-3 as appropriate.

5.6.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.1.2.4.3-1: Common Exception messages EN-DC FR2 intra frequency event triggered reporting tests without gap in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO, Synchronous cells and NOT SS-SINR Table H.3.1-4 with A3-offset = -7dB Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM Table H.3.4-1 Table H.3.4-2 Table H.3.7-1 with Condition DRX.1 for Test 1 Table H.3.7-1 with Condition DRX. 7 for Test 2 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 5.6.1.2-1 and 5.6.1.2-2	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.3 FR2
Specific message contents exceptions for Test Configuration 5.6.1.2-3 and 5.6.1.2-4	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.4 FR2

5.6.1.2.5 Test requirement

Tables 5.6.1.2.4.1-3, 5.6.1.2.5-1 and 5.6.1.2.5-2 define the primary level settings including test tolerances for EN-DC FR2 event triggered reporting test without gap in DRX.

Table 5.6.1.2.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap in DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1~4	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1~4	66		66	
Initial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1~4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1~4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1~4	SSB		SSB	
PDSCH RMC configuration		1,2	SR.3.2 TDD		N/A	
		3,4	SR.3.3 TDD			
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		N/A	
		3,4	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		N/A	
		3,4	CCR.3.7 TDD		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1~4	120		120	
OCNG Patterns		1~4	OP.1		OP.1	
PDSCH/PDCCH TCI state		1~4	TCI.State.2		N/A	
CSI-RS for tracking		1~4	TRS.2.1 TDD		N/A	
SSB configuration		1, 2	SSB.3 FR2		SSB.3 FR2	
		3, 4	SSB.4 FR2		SSB.4 FR2	
Propagation Condition		1~4	AWGN		AWGN	

Table 5.6.1.2.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap in DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 1 defined in A.9.1			
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1~4	3.77	-1.52	-Infinity	-1.52
N_{oc} Note 2	dBm/15 KHz	1~4	-101.5			
N_{oc} Note 2	dBm/SCS	1, 2	-92.5			
		3, 4	-89.5			
SSB_RP	dBm/SCS	1, 2	-88.47	-88.47	-Infinity	-88.47
		3, 4	-85.46	-85.46	-Infinity	-85.46
$\hat{E}_s/N_{oc}$	dB	1~4	4	4	-Infinity	4
Io	dBm/95.04MHz	1~4	-58.03	-55.68	See Cell 2 columns	

NOTE 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
NOTE 5:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- X = 7202 for UE supporting power class1,
- X = 4322 for UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- X = 51202 for UE supporting power class 1,
- X = 30722 for UE supporting power class 2, 3 or 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured shall be less than a total of 4322 ms for Test 1 and 30722 ms for Test 2 in this test case (note: this gives a total measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.6.1.3 EN-DC FR2 event-triggered reporting with gap in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC1, PC3

This test case is incomplete for UE power classes other than PC1 and PC3

This test case is incomplete for test frequencies > 40.8 GHz

5.6.1.3.1 Test purpose

To verify the UE's ability to make a correct reporting of an event within intra-frequency cell search with gap in non-DRX. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 [6] clause 9.2.5.1 and 9.2.5.2

5.6.1.3.2 Test applicability

This test applies to all types of E-UTRA UE release 15 forward, supporting EN-DC. This test applies to UE that support CSI-RS based RLM and BWP operation without bandwidth restriction.

5.6.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.1.3.

5.6.1.3.4 Test description

5.6.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.1.3.4.1-1.

Table 5.6.1.3.4.1-1: Supported test configurations for EN-DC FR2 event-triggered reporting with gap in non-DRX

Configuration	Description
5.6.1.3-1	LTE FDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.3-2	LTE TDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.3-3	LTE FDD, 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.3-4	LTE TDD, 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 5.6.1.3.4.1-2.

Table 5.6.1.3.4.1-2: Initial conditions for EN-DC FR2 event-triggered reporting with gap in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	TBD		

1. The test parameters for PSCell and neighbour cell are given in Table 5.6.1.3.4.1-3 below.

2. Message contents are defined in clause 5.6.1.3.4.3.

3. There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and Cell 3 are set according to clause C.1.1 and C.1.2.

Table 5.6.1.3.4.1-3: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)	
Neighbour cell		1~4	Cell 3	Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3	One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
Gap type		1~4	Per-UE gaps	
Measurement gap repetition periodicity	ms	1~4	40	
Measurement gap length	ms	1~4	6	
Measurement gap offset	ms	1~4	39	
SMTC configuration		1~4	SMTC.1	

CSI-RS parameters		1~4	CSI-RS.3.2 TDD **resource #0**	
A3-Offset	dB	1~4	-11	
CP length		1~4	Normal	
Hysteresis	dB	1~4	0	
Time To Trigger	s	1~4	0	
Filter coefficient		1~4	0	L3 filtering is not used
DRX		1~4	OFF	
Time offset between Cell 1 and Cell 2		1~4	3 μs	Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3 μs	Synchronous cells
T1	s	1~4	5	
T2	s	1~4	5	

5.6.1.3.4.2 Test procedure

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.1.3.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.1.3.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 1922 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.6.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.1.3.4.3-1: Common Exception messages EN-DC FR2 intra frequency event triggered reporting tests with gap in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and GAP NEEDED Table H.3.1-4 with A3-offset =-11dB Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM Table H.3.4-1 Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0

Table 5.6.1.3.4.3-2: MeasObjectNR (Step 3, test procedure)

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO, Synchronous cells and NOT SS-SINR			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
ssbSubcarrierSpacing	SubcarrierSpacing specified in 38.508-1 [14] Table 7.3.1-3a with condition SSB.3 FR2		5.6.1.3-1, 5.6.1.3-2
	SubcarrierSpacing specified in 38.508-1 [14] Table 7.3.1-3a with condition SSB.4 FR2		5.6.1.3-3, 5.6.1.3-4
smtc1	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure CHOICE {			
setup CHOICE {			
longBitmap	11000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000	SSB#0 and SSB#1	
}			
}			
}			
}			
cellsToAddModList SEQUENCE (SIZE (1..maxNrofCellMeas)) OF CellsToAddMod {	1 entry		
CellsToAddMod[1] SEQUENCE {		entry 1	
physCellId	PhysCellId of Cell 3		
cellIndividualOffset SEQUENCE {			
rsrpOffsetSSB	dB16		
rsrqOffsetSSB	Not present		
sinrOffsetSSB	Not present		
rsrpOffsetCSI-RS	Not present		
rsrqOffsetCSI-RS	Not present		
sinrOffsetCSI-RS	Not present		
}			
}			
}			
}			

5.6.1.3.5 Test requirement

Tables 5.6.1.3.4.1-3, 5.6.1.3.5-1 and 5.6.1.3.5-2 define the primary level settings including test tolerances for EN-DC FR2 event triggered reporting test with gap under non-DRX.

Table 5.6.1.3.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1~4	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1,2	24		24	
		3,4	48		48	
Initial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2	DLBWP.1.2		DLBWP.1.1	
		3,4	DLBWP.1.7		DLBWP.1.1	
Active UL BWP configuration		1,2	ULBWP.1.2		ULBWP.1.1	
		3,4	ULBWP.1.7		ULBWP.1.1	
RLM-RS		1~4	CSI-RS		SSB	
PDSCH RMC configuration		1,2	SR.3.2 TDD		N/A	
		3,4	SR.3.3 TDD			
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		N/A	
		3,4	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		N/A	
		3,4	CCR.3.7 TDD		N/A	
TRS configuration		1~4	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		1~4	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1~4	120		120	
OCNG Patterns		1~4	OP.5		N/A	
cellIndividualOffset	dB	1~4	N/A		16	
SSB		1, 2	SSB.3 FR2		SSB.7 FR2	
		3, 4	SSB.4 FR2		SSB.8 FR2	
Propagation Condition		1~4	No external noise (NOTE 1)			
NOTE 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].						

Table 5.6.1.3.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 3 defined in A.9.3			
			AoA1		AoA2	
Assumption for UE beams[Note 4]		1~4	Rough		Rough	
E_s	dBm/SCS	1,2	-89		-89	
		3,4	-86		-86	
$\hat{E}_s / I_{ot}$ BB [Note 5]	dB	1~4	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1, 2	-89	-89	-Infinity	-89
		3, 4	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1,2	-64.41	-64.41	-Infinity	-64.41
		3,4	-61.41	-61.41	-Infinity	-61.41

Time multiplexing of the downlink transmissions from each AoA	1~4	Defined in Figure 5.6.1.3.5-1	Time multiplexing of the downlink transmissions from each AoA	Time multiplexing of the downlink transmissions from each AoA
NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation. Note 5: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB$_P$ from TS 38.101-2 [19] Table 6.2.1.3-4.				

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1.92s from the beginning of time period T2

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTI$_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured shall be less than a total of 1922 ms in this test case (note: this gives a total measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

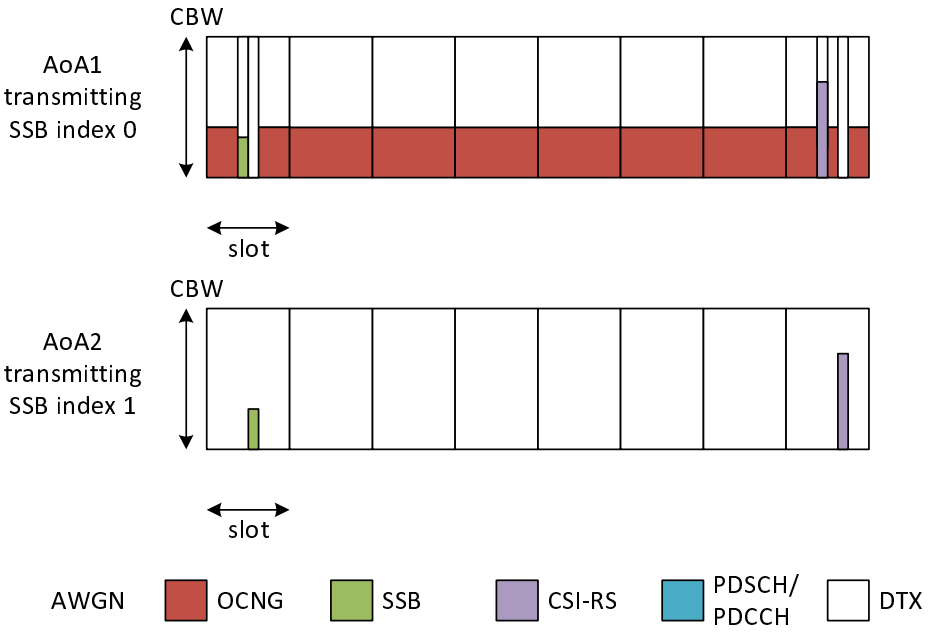

Figure 5.6.1.3.5-1: Time multiplexed downlink transmissions (Config 1,2 example)

5.6.1.4 EN-DC FR2 event-triggered reporting with gap in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC1, PC3

- The test is incomplete for UE power classes other than PC1 and PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.6.1.4.1 Test purpose

To verify the UE's ability to make a correct reporting of an event within intra-frequency cell search with gap in DRX. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 [6] clause 9.2.5.1 and 9.2.5.2

5.6.1.4.2 Test applicability

This test applies to all types of E-UTRA UE release 15 forward, supporting EN-DC, This test applies to UE that support CSI-RS based RLM, BWP operation without bandwidth restriction and long DRX cycle.

5.6.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.1.4.

5.6.1.4.4 Test description

5.6.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.1.4.4.1-1.

Table 5.6.1.4.4.1-1: Supported test configurations for EN-DC FR2 event-triggered reporting with gap in DRX

Configuration	Description
5.6.1.4-1	LTE FDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.4-2	LTE TDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.4-3	LTE FDD, 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.1.4-4	LTE TDD, 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 5.6.1.4.4.1-2.

Table 5.6.1.4.4.1-2: Initial conditions for EN-DC FR2 event-triggered reporting with gap in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.3.3.1-2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	TBD		

1. The test parameters for PSCell and neighbour cell are given in Table 5.6.1.4.4.1-3 below.

2. Message contents are defined in clause 5.6.1.4.4.3.

3. There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and Cell 3 are set according to clause C.1.1 and C.1.2.

Table 5.6.1.4.4.1-3: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)		
Neighbour cell		1~4	Cell 3		Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3		One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
Gap type		1~4	Per-UE gaps		
Measurement gap repetition periodicity	ms	1~4	40		
Measurement gap length	ms	1~4	6		
Measurement gap offset	ms	1~4	39		
SMTC configuration		1~4	SMTC.1		
CSI-RS parameters		1~4	CSI-RS.3.2 TDD **resource #0**		
A3-Offset	dB	1~4	-7(Note1)		
CP length		1~4	Normal		
Hysteresis	dB	1~4	0		
Time To Trigger	s	1~4	0		
Filter coefficient		1~4	0		L3 filtering is not used
DRX		1~4	DRX.1	DRX. 7	DRX related parameters are defined in Table 5.6.1.4.5-2
Time offset between Cell 1 and Cell 2		1~4	3μs		Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3μs		Synchronous cells
T1	s	1~4	5		
T2	s	1~4	10	52	
Note1 : Test tolerance of -1dB applied					

5.6.1.4.4.2 Test procedure

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell.

In the measurement control information a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.1.4.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.1.4.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than X ms for Test 1 and Y ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X and Y is

   - X = 7202, Y = 51202 for UE supporting power class 1,

   - X = 4322, Y = 30722 for UE supporting power class 2, 3, or 4

7. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

10. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On according to TS 38.508-1 [14] clause 4.5].

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

12. Repeat step 1-11 for each sub-test in Table 5.6.1.2.4.1-3 as appropriate.

5.6.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.1.4.4.3-1: Common Exception messages EN-DC FR2 intra frequency event triggered reporting tests with gap in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, Synchronous cells and NOT SS-SINR Table H.3.1-4 with A3-offset = -7dB Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM Table H.3.4-1 Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 Table H.3.7-1 with Condition DRX.1 and Gap for test 1 Table H.3.7-1 with Condition DRX. 7 and Gap for test 2 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 5.6.1.4-1 and 5.6.1.4-2	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.3 FR2
Specific message contents exceptions for Test Configuration 5.6.1.4-3 and 5.6.1.4-4	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.4 FR2

5.6.1.4.5 Test requirement

Tables 5.6.1.4.4.1-3, 5.6.1.4.5-1 and 5.6.1.4.5-2 define the primary level settings including test tolerances for EN-DC FR2 event triggered reporting test with gap in DRX.

Table 5.6.1.4.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1~4	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1~4	66		66	
Initial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2	DLBWP.1.2		DLBWP.1.1	
		3,4	DLBWP.1.7		DLBWP.1.1	
Active UL BWP configuration		1,2	ULBWP.1.2		ULBWP.1.1	
		3,4	ULBWP.1.7		ULBWP.1.1	
RLM-RS		1~4	CSI-RS		SSB	
PDSCH RMC configuration		1,2	SR.3.2 TDD		N/A	
		3,4	SR.3.3 TDD			
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		N/A	
		3,4	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		N/A	
		3,4	CCR.3.7 TDD		N/A	
TRS configuration		1~4	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		1~4	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1~4	120		120	
OCNG Patterns		1~4	OP.1		OP.1	
SSB		1, 2	SSB.3 FR2		SSB.3 FR2	
		3, 4	SSB.4 FR2		SSB.4 FR2	
Propagation Condition		1~4	AWGN		AWGN	

Table 5.6.1.4.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 1 defined in A.3.9.1			
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1~4	3.77	-1.52	-Infinity	-1.52
N_{oc} Note 2	dBm/15 KHz	1~4	-101.5			
N_{oc} Note 2	dBm/SCS	1, 2	-92.5			
		3, 4	-89.5			
SSB_RP	dBm/SCS	1, 2	-88.47	-88.47	-Infinity	-88.47
		3, 4	-85.46	-85.46	-Infinity	-85.46
$\hat{E}_s / N_{oc}$	dB	1~4	4	4	-Infinity	4
Io	dBm/95.04MHz	1, 2	-58.03	-55.68	See Cell 2 columns	

NOTE 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
NOTE 5:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [3] Table 6.2.1.3-4.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- X = 7202 for UE supporting power class1,
- X = 4322 for UE supporting power class 2, 3 or 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- X = 51202 for UE supporting power class 1,
- X = 30722 for UE supporting power class 2, 3 or 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured shall be less than a total of 4322 ms for Test 1 and 30722 ms for Test 2 in this test case (note: this gives a total measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

5.6.2 Inter-frequency measurements

5.6.2.0 Minimum conformance requirements for Inter-frequency measurements

The requirements in Section 9.3 apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in Sections 10.1.4 and 10.1.5 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in Sections 10.1.9 and 10.1.10 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in Sections 10.1.14 and 10.1.15 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.3 for a corresponding Band.

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency

cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$.

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter}) \text{ ms}$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 9.3.4-1 and table 9.3.4-2.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3.4-3 and table 9.3.4-4.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 9.3.5-1 and table 9.3.5-2.

M_{pss/sss_sync_inter}: For a UE supporting FR2 power class 1, M_{pss/sss_sync_inter} = 64 samples. For a UE supporting FR2 power class 2, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2 power class 3, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2 power class 4, M_{pss/sss_sync_inter} = 40 samples.

$M_{SSB_index_inter}$: For a UE supporting power FR2 class 1, $M_{SSB_index_inter}$ = 40 samples. For a vehicle mounted UE supporting power class 2, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting power class 3, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting power class 4, $M_{meas_period_inter}$ = 24 samples.

$M_{meas_period_inter}$: For a UE supporting FR2 power class 1, $M_{meas_period_inter}$ =64 samples. For a UE supporting FR2 power class 2, $M_{meas_period_inter}$=40 samples. For a UE supporting FR2 power class 3, $M_{meas_period_inter}$ =40 samples. For a UE supporting FR2 power class 4, $M_{meas_period_inter}$ = 40 samples.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

Table 9.3.4-2: Time period for PSS/SSS detection, (Frequency range FR2)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	$Max(600ms, M_{pss/sss_sync_inter} \times Max(MGRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(600ms, (1.5 \times M_{pss/sss_sync_inter}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$M_{pss/sss_sync_inter} \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 9.3.4-4: Time period for time index detection (Frequency range FR2)

Condition NOTE1,2	$T_{SSB_time_index_inter}$
No DRX	$Max(200ms, M_{SSB_index_inter} \times Max(MGRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(200ms, (1.5 \times M_{SSB_index_inter}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$M_{SSB_index_inter} \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

When measurement gaps are provided for inter frequency measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 9.3.5-1 and 9.3.5-2:

Table 9.3.5-2: Measurement period for inter-frequency measurements with gaps (Frequency FR2)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	$Max(400ms, M_{meas_period_inter} \times Max(MGRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(400ms, (1.5 \times M_{meas_period_inter}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$M_{meas_period_inter} \times DRX\ cycle \times CSSF_{inter}$

NOTE 1:	DRX or non DRX requirements apply according to the conditions described in clause 3.6.1
NOTE 2:	In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. Both $T_{identify_inter_without_index}$ and $T_{identify_inter_with_index}$ are defined in clause 9.3.4. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ defined in clause 9.3.4 and then triggers the measurement report as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_inter}$ defined in clause 9.3.5 provided the timing to that cell has not changed more than ± 3200 Tc while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clause 9.3.2, 9.3.4, 9.3.5, 9.3.6.3.

5.6.2.1 EN-DC FR2-FR2 event-triggered reporting in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.6.2.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

5.6.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC. Test 2 is applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306) and Gap Pattern Id 13, otherwise Test 1 is applicable.

5.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.2.1.

5.6.2.1.4 Test description

5.6.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.2.1.4.1-1.

Table 5.6.2.1.4.1-1: EN-DC FR2-FR2 event triggered reporting tests in non-DRX supported test configurations

Test Case ID	Description
5.6.2.1-1	LTE FDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.2.1-2	LTE TDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations NOTE 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table 5.6.2.1.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	13	As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2	39	39	
SMTC-SSB parameters		Config 1,2	SSB.3 FR2		As specified in clause A.3.2
offsetMO	dB	Config 1,2	16		Applied to NR Cell 3 measurement object
A3-Offset	dB	Config 1,2	-11		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3μs		Synchronous cells.
T1	s	Config 1,2	5		
T2	s	Config 1,2	5.2 for PC1; 3.5 for other PC	5.2 for PC1; 3.5 for other PC	PC1 - power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 5.6.2.1.4.1-3: Test Environment test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	

Exceptions to connection diagram		

1. Message contents are defined in clause 5.6.2.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 are set according to clause C.1.2 and clause C.1.3. Cell 3 is switched off during the initial connection setup.

3. The AoA setup for this test is Setup 3 as defined in clause A.9. The UE RX spherical coverage direction has been obtained previously using one of the search procedures as described in Annex I.

5.6.2.1.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2.

In test 1 measurement gap pattern configuration # 0 as defined in Table 5.6.2.1.4.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table 5.6.2.1.4.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.2.1.4.1-2. The TE shall ensure that the NR FR2 cells are from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] and relative angular offset between active probes are according to Table A.9.3-1. T1 starts.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.2.1.4.1-2. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than 5122 ms for UE supporting power class 1, or 3202 ms for UE supporting other power class for Test 1 and Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = [(current cell 3 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. TE shall change the active probes in such way that relative angular offset between active probes differs in the following iteration.

10. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 10 fails, SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

12. Repeat step 1-11 for each sub-test in Table 5.6.2.1.4.1-2 as appropriate.

5.6.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 5.6.2.1.4.3-1: Common Exception messages for Additional EN-DC FR2-FR2 event triggered reporting tests in non-DRX test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ for Test 1. For Test 2, additionally with condition GAP NEEDED Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4 with A3-offset = -11dB Table H.3.1-6 with Conditions gapFR2 and Pattern #13 for Test 2 Table H.3.4-4 with Condition gapUE Test 1 Table H.3.4-5 with Condition Pattern #0 for Test 1 Table H.3.1-7 with Condition INTER-FREQ Table H.3.4-1 Table H.3.4-2 Table H.3.4-3

Table 5.6.2.1.4.3-2: MeasObjectNR-DEFAULT: EN-DC FR2-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB16		
}			

5.6.2.1.5 Test requirement

Table 5.6.2.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.2.1.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 3 as specified in clause A.9			
			AoA1		AoA2	
Assumption for UE beams[Note 7]		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1,2	66		66	
BWP BW	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns		Config 1,2	OP.1		OP.1	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	

PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	
SMTC configuration		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/SCS	Config 1,2	-87	-87	-Infinity	-87
SSB-RP Note 3	dBm/SCS Note5	Config 1,2	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot\ BB}$ Note 8	dB	Config 1,2	1.89	1.89	-Infinity	1.89
Io Note3	dBm/95.04 MHz Note5	Config 1,2	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1,2	No external noise (NOTE 9)		No external noise (NOTE 9)	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Void
NOTE 3: SSB-RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Void
NOTE 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 6: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 7: Information about types of UE beam is given in TS 38.133 [6] Annex B.2.1.3, and does not limit UE implementation or test system implementation.
NOTE 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.
NOTE 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 5122 ms in this test for power class UE and 3202 ms for other power classes.

5.6.2.2 EN-DC FR2-FR2 event-triggered reporting in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.6.2.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

5.6.2.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR2 and long DRX cycle. Tests 3 and 4 are applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306) and Gap Pattern Id 13, otherwise Tests 1 and 2 are applicable.

5.6.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.2.2.

5.6.2.2.4 Test description

5.6.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.2.2.4.1-1.

Table 5.6.2.2.4.1-1: EN-DC FR2-FR2 event triggered reporting tests in DRX supported test configurations

Test Case ID	Description
5.6.2.2-1	LTE FDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.2.2-2	LTE TDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations NOTE 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table 5.6.2.2.4-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2	1				One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2	1, 2				Two FR1 NR carrier frequencies is used.

Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0		13		As specified in TS 38.133 clause 9.1.2-1.
Measurement gap offset		Config 1,2	39		39		
SMTC-SSB parameters		Config 1,2	SSB.3 FR2				As specified in clause A.3
A3-Offset	dB	Config 1,2	-12				Value modified by TT
Hysteresis	dB	Config 1,2	0				
CP length		Config 1,2	Normal				
TimeToTrigger	s	Config 1,2	0				
Filter coefficient		Config 1,2	0				L3 filtering is not used
DRX		Config 1,2	DRX.1	DRX.7	DRX.1	DRX.7	As specified in clause A.5
Time offset between PCell and PSCell		Config 1,2	3 µs				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3µs				Synchronous cells.
T1	s	Config 1,2	5				
T2	s	Config 1,2	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	PC1 - power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 5.6.2.2.4.1-3: Test Environment test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 5.6.2.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and Cell 3 are set according to clause C.1.2.

3. The UE Rx beam peak direction for Cell 2 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

5.6.2.2.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table 5.6.2.2.4.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table 5.6.2.2.4.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.2.2.4.1-2. The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction. T1 starts.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.2.2.4.1-2.

6. UE shall transmit a MeasurementReport message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than 7682 ms for UE supporting power class 1, or 4802 ms for UE supporting other power class for Test 1 and Test 3 and 81922 ms for UE supporting power class 1, or 51202 ms for UE supporting other power class for Test 2 and Test 4, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 5.6.2.2.4.1-2 as appropriate.

5.6.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.2.2.4.3-1: Common Exception messages for Additional EN-DC FR2-FR2 event triggered reporting tests without SSB time index detection in DRX test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ. For Test 3 and Test 4, with condition GAP NEEDED additionally. Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4 with A3-offset = -12dB Table H.3.1-6 with Conditions gapFR2 and Pattern #13 for Test 3 and Test 4 Table H.3.4-4 with Condition gapUE Test 1 and Test 2 Table H.3.4-5 with Condition Pattern #0 for Test 1 and Test 2 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 and Gap and INTER-FREQ for Test 1 and Test 3 Table H.3.7-1 with Condition DRX.7 and Gap and INTER-FREQ for Test 2 and Test 4 Table H.3.4-1 Table H.3.4-2 Table H.3.4-3

5.6.2.2.5 Test requirement

Table 5.6.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.2.2.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 1 as specified in clause A.9			
Assumption for UE beams[Note 7]		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1,2	66		66	
BWP BW	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1			
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1		Config 1,2	OP.1		OP.1	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	

SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1,2	-95.7		-95.7	
SS-RSRP Note 3	dBm/SCS Note5	Config 1,2	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1,2	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%. In test 1, 2, 3 and 4 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 7682 ms for power class 1 UE and 4802 ms for other power classes in test 1 and 81922 for power class 1 UE and 51202 ms for other power classes in test 2.

5.6.2.3 EN-DC FR2-FR2 event-triggered reporting in non-DRX with SSB time index detection

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.6.2.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

5.6.2.3.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC. Test 2 is applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306) and Gap Pattern Id 13, otherwise Test 1 is applicable.

5.6.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.2.3.

5.6.2.3.4 Test description

5.6.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.2.3.4.1-1.

Table 5.6.2.3.4.1-1: EN-DC FR2-FR2 event triggered reporting tests in non-DRX with SSB time index detection supported test configurations

Test Case ID	Description
5.6.2.3-1	LTE FDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.2.3-2	LTE TDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations NOTE 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table 5.6.2.3.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR2 NR carrier frequencies is used.

Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	13	As specified in TS 38.133 clause 9.1.2-1.
Measurement gap offset		Config 1,2	39	39	
SMTC-SSB parameters		Config 1,2	SSB. 3 FR2		As specified in clause A.3
offsetMO	dB	Config 1,2	16		Applied to NR Cell 3 measurement object
A3-Offset	dB	Config 1,2	-11		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3μs		Synchronous cells.
T1	s	Config 1,2	5		
T2	s	Config 1,2	7 for PC1; 4.5 for other PC	7 for PC1; 4.5 for other PC	PC1 - power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 5.6.2.3.4.1-3: Test Environment test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 5.6.2.3.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and are set according to clause C.1.2 and clause C.1.3. Cell 3 is switched off during the initial connection setup.

3. The AoA setup for this test is Setup 3 as defined in clause A.9. The UE RX spherical coverage direction has been obtained previously using one of the search procedures as described in Annex I.

5.6.2.3.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2.

In test 1 measurement gap pattern configuration # 0 as defined in Table 5.6.2.3.4.1-1 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table 5.6.2.3.4.1-1 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.2.3.4.1-2. The TE shall ensure that the NR FR2 cells are from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] and relative angular offset between active probes are according to Table A.9.3-1. T1 starts.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.2.3.4.1-2. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than 6722 ms for UE supporting power class 1, or 4162 ms for UE supporting other power class for Test 1 and Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = [(current cell 3 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. TE shall change the active probes in such way that relative angular offset between active probes differs in the following iteration.

10. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 10 fails, SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

12. Repeat step 1-11 for each sub-test in Table 5.6.2.3.4.1-2 as appropriate.

5.6.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.2.3.4.3-1: Common Exception messages for Additional EN-DC FR2-FR2 event triggered reporting tests without SSB time index detection in non-DRX test requirement

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ. For Test 2, additionally with condition GAP NEEDED. Table H.3.1-3 with conditions INTER-FREQ MO and and Synchronous cells Table H.3.1-4 with condition SSB Index and A3-offset = -11dB Table H.3.1-6 with conditions gapFR2 and Pattern #13 for Test 2 Table H.3.4-4 with condition gapUE for Test 1 Table H.3.4-5 with condition Pattern #0 for Test 1 Table H.3.1-7 with condition SSB Index and INTER-FREQ Table H.3.4-1 Table H.3.4-2 Table H.3.4-3

Table 5.6.2.3.4.3-2: MeasObjectNR-DEFAULT: EN-DC FR2-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB16		
}			

5.6.2.3.5 Test requirement

Table 5.6.2.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.2.3.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 3 as specified in clause A.3.9			
			AoA1		AoA2	
Assumption for UE beams[Note 7]		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		Config 1,2	66		66	
BWP BW	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Initial UL BWP		Config 1,2	DLBWP.0.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	
SMTC configuration		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSB-RP Note 3	dBm/SCS Note5	Config 1,2	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note8	dB	Config 1,2	1.89	1.89	-Infinity	1.89
Io Note3	dBm/95.04 MHz Note5	Config 1,2	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1,2	No external noise (NOTE 9)		No external noise (NOTE 9)	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Void
NOTE 3: SSB-RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Void
NOTE 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 6: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 7: Information about types of UE beam is given in TS 38.133 [6] Annex B.2.1.3, and does not limit UE implementation or test system implementation
NOTE 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.
NOTE 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%. In test 1 and 2 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 6722 ms in this test for power class UE and 4162 ms for other power classes.

5.6.2.4 EN-DC FR2-FR2 event-triggered reporting in DRX with SSB time index detection

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.6.2.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

5.6.2.4.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR2 and long DRX cycle. Test 3 and Test 4 applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306) and Gap Pattern Id 13, otherwise Tests 1 and 2 are applicable.

5.6.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.2.4.

5.6.2.4.4 Test description

5.6.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.2.4.4.1-1.

Table 5.6.2.4.4.1-1: EN-DC FR2-FR2 event triggered reporting tests in DRX with SSB time index detection supported test configurations

Test Case ID	Description
5.6.2.4-1	LTE FDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.2.4-2	LTE TDD, 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations NOTE 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table 5.6.2.4.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in DRX

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2	1				One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2	1, 2				Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0		13		As specified in TS 38.133 clause 9.1.2-1.
Measurement gap offset		Config 1,2	39		39		
SMTC-SSB parameters		Config 1,2	SSB.3 FR2				As specified in clause A.3
A3-Offset	dB	Config 1,2	-12				Value modified by TT
Hysteresis	dB	Config 1,2	0				
CP length		Config 1,2	Normal				
TimeToTrigger	s	Config 1,2	0				
Filter coefficient		Config 1,2	0				L3 filtering is not used
DRX		Config 1,2	DRX.1	DRX.7	DRX.1	DRX.7	As specified in clause A.5

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
Time offset between PCell and PSCell		Config 1,2	3 μs				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3μs				Synchronous cells.
T1	s	Config 1,2	5				
T2	s	Config 1,2	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	PC1 - power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 5.6.2.4.4.1-3: Test Environment test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 5.6.2.4.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and are set according to clause C.1.2 and clause C.1.3. Cell 3 is switched off during the initial connection setup.

3. The UE Rx beam peak direction for Cell 2 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

5.6.2.4.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table 5.6.2.4.4.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table 5.6.2.4.4.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.2.4.4.1-2.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.2.4.4.1-2.

6. UE shall transmit a MeasurementReport message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than 10082 ms for UE supporting power class 1, or 6242 ms for UE supporting other power class for Test 1 and Test 3 and 107522 ms for UE supporting power class 1, or 66562 ms for UE supporting other power class for Test 2 and Test 4, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 5.6.2.4.4.1-2 as appropriate.

5.6.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.2.4.4.3-1: Common Exception messages for Additional EN-DC FR2-FR2 event triggered reporting tests with SSB time index detection in DRX test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ. For Test 3 and Test 4, additionally with condition GAP NEEDED Table H.3.1-3 with conditions INTER-FREQ MO and and Synchronous cells Table H.3.1-4 with condition SSB Index and A3-offset = -12dB Table H.3.1-6 with conditions gapFR2 and Pattern #13 for Test 3 and Test 4 Table H.3.4-4 with condition gapUE for Test 1 and Test 2 Table H.3.4-5 with condition Pattern #0 for Test 1 and Test 2 Table H.3.1-7 with condition SSB Index and INTER-FREQ Table H.3.7-1 with condition DRX.1 and Gap and INTER-FREQ for Test 1 and Test 3 Table H.3.7-1 with condition DRX.7 and Gap and INTER-FREQ for Test 2 and Test 4 Table H.3.4-1 Table H.3.4-2 Table H.3.4-3

5.6.2.4.5 Test requirement

Table 5.6.2.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.2.4.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in DRX

OCNG Patterns defined in A.3.2.1.1		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1,2	-95.7		-95.7	
SSB_RP Note 3	dBm/SCS Note5	Config 1,2	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1,2	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%. In test 1, 2, 3 and 4 UE is required to report SSB time index.

NOTE 1: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 2: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 10082 ms for power class 1 UE and 6242 ms for other power classes in test 1 and 107522 for power class 1 UE and 66562 ms for other power classes in test 2.

5.6.2.5 EN-DC FR1-FR2 event-triggered reporting in non-DRX

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- NR FR1 - FR2 OTA testability is still FFS.

5.6.2.5.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

5.6.2.5.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC. Test 2 is applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306) and Gap Pattern Id 13, otherwise Test 1 is applicable.

5.6.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.2.5.

5.6.2.5.4 Test description

5.6.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.2.5.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 5.6.2.5.4.1-2. Test environment parameters are given in Table 5.6.2.5.4.1-3.

Table 5.6.2.5.4.1-1 EN-DC FR1-FR2 event triggered reporting tests in non-DRX supported test configurations

Test Case ID	Description of serving cell	Description of target cell
5.6.2.5-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.2.5-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
5.6.2.5-3	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
5.6.2.5-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	
5.6.2.5-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
5.6.2.5-6	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
NOTE 1: The UE is only required to be tested in one of the supported test configurations NOTE 2: The target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2		

Table 5.6.2.5.4-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		One FR1 and one FR2 NR carrier frequency is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	13	As specified in TS 38.133 clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39	39	
SMTC-SSB parameters on NR RF Channel 1		Config 1,4	SSB.1 FR1		As specified in clause A.3
		Config 2,5	SSB.1 FR1		As specified in clause A.3
		Config 3,6	SSB.2 FR1		As specified in clause A.3
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2		As specified in clause A.3
offsetMO	dB	Config 1,2,3,4,5,6	6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 µs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3µs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	5.2 for PC1; 3.5 for other PC	5.2 for PC1; 3.5 for other PC	PC1 - power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 5.6.2.5.4-3: Test Environment test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and NR FR1, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 5.6.2.5.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR2 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and Cell 3 are set according to Annex TBD

3. The UE Rx beam peak direction for Cell 3 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

5.6.2.5.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2.

In test 1 measurement gap pattern configuration # 0 as defined in Table 5.6.2.5.4.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table 5.6.2.5.4.1-2 is provided for UE that support per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.2.5.4.1-2. The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction. T1 starts.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.2.5.4.1-2.

6. UE shall transmit a MeasurementReport message triggered by Event A4 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than 5122 ms for UE supporting power class 1, or 3202 ms for UE supporting other power class for Test 1 and Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 3 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. After the RRC connection release, the SS:

- transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
or:
- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 4.6.2.1.4.1-2 as appropriate.

5.6.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.2.5.4.3-1: Common Exception messages for Additional EN-DC FR1-FR2 event triggered reporting tests without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ. For Test 2, additionally with condition GAP NEEDED Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4AA with A4-threshold = -105 Table H.3.1-6 with Conditions gapFR2 and Pattern #13 for Test 2 Table H.3.4-4 with Condition gapUE Test 1 Table H.3.4-5 with Condition Pattern #0 for Test 1 Table H.3.1-7 with Condition INTER-FREQ Table H.3.4-1 Table H.3.4-2 Table H.3.4-3

Table 5.6.2.5.4.3-2: MeasObjectNR-DEFAULT: EN-DC FR1-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	6 dB		
}			

5.6.2.5.5 Test requirement

Table 5.6.2.5.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.2.5.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6	NA		Setup 1	
Assumption for UE beams[Note 7]		Config 1,2,3,4,5,6	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD		TDD	

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
		Config 2,3,5,6	TDD		TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
TDD configuration		Config 2,5	TDDConf.1.1		TDDConf.3.1	
		Config 3,6	TDDConf.2.1		TDDConf.3.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
OCNG Patterns		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR.2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR.2.1 TDD			
Dedicated CORESET RMC configuration		Config 1,4	CCR.1.1 FDD		CCR.3.1 TDD	
		Config 2,5	CCR.1.1 TDD		CCR.3.1 TDD	
		Config 3,6	CCR.2.1 TDD		CCR.3.1 TDD	
SMTC configuration		Config 1,4	SMTC.2		SMTC.2	
		Config 2,3,5,6	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15		120	
		Config 3,6	30		120	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_S$	dBm/SCS	Config 1,2,3,4,5,6	Link only, see clause A.6A		-Infinity	-87
SSB_RP Note 3	dBm/SCS Note5	Config 1,2,3,4,5,6			-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1,2,3,4,5,6			-Infinity	14.69
Io Note3	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6			-Infinity	-58.01
Propagation Condition		Config 1,2,3,4,5,6			No external noise (NOTE 9)	

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
NOTE 2: Void						
NOTE 3: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
NOTE 4: Void.						
NOTE 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone						
NOTE 6: As observed with 0dBi gain antenna at the centre of the quiet zone						
NOTE 7: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation						
NOTE 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.						
NOTE 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].						

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%. In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 5122 ms in this test for power class UE and 3202 ms for other power classes.

5.6.2.6 EN-DC FR1-FR2 event-triggered reporting in DRX

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- NR FR1 - FR2 OTA testability is still FFS.

5.6.2.6.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in DRX within inter-frequency cell search requirements.

5.6.2.6.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR2 and long DRX cycle. Tests 3 and 4 are applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306) and Gap Pattern Id 13, otherwise Tests 1 and 2 are applicable.

5.6.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.2.6.

5.6.2.6.4 Test description

5.6.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.2.6.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 5.6.2.6.4.1-2. Test environment parameters are given in Table 5.6.2.6.4.1-3.

Table 5.6.2.6.4.1-1: EN-DC FR1-FR2 event triggered reporting tests in DRX supported test configurations

Test Case ID	Description of serving cell	Description of target cell
5.6.2.6-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.2.6-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
5.6.2.6-3	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
5.6.2.6-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	
5.6.2.6-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
5.6.2.6-6	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
NOTE 1: The UE is only required to be tested in one of the supported test configurations NOTE 2: The target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2		

Table 5.6.2.6.4-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1				One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2				One FR1 and one FR2 NR carrier frequency is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0		13		As specified in TS 38.133 clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39		39		
SMTC-SSB parameters on NR RF Channel 1		Config 1,4	SSB.1 FR1				As specified in clause A.3
		Config 2,5	SSB.1 FR1				As specified in clause A.3
		Config 3,6	SSB.2 FR1				As specified in clause A.3
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2				As specified in clause A.3
offsetMO	dB	Config 1,2,3,4,5,6	6				
Hysteresis	dB	Config 1,2,3,4,5,6	0				
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105				
CP length		Config 1,2,3,4,5,6	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6	0				
Filter coefficient		Config 1,2,3,4,5,6	0				L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX.1	DRX.2	DRX.1	DRX.2	As specified in clause A.5
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms				Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3μs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5				

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
T2	s	Config 1,2,3,4,5,6	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	PC1 - power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 5.6.2.6.4-3: Test Environment test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and NR FR1, 7.2.3 for NR FR2		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 4.6.2.3.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR2 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and Cell 3 are set according to Annex TBD

3. The UE Rx beam peak direction for Cell 3 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

5.6.2.6.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table 5.6.2.6.4-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table 5.6.2.6.4-2 is provided for UE that support per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.2.6.4-2. The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction. T1 starts.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.2.6.4-2.

6. UE shall transmit a MeasurementReport message triggered by Event A4 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than

7682 ms for UE supporting power class 1, or 4802 ms for UE supporting other power class for Test 1 and Test 3 and 81922 ms for UE supporting power class 1, or 51202 ms for UE supporting other power class for Test 2 and Test 4, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 3 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. After the RRC connection release, the SS:

- transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
or:
- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 5.6.2.6.4-2 as appropriate.

5.6.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.2.6.4.3-1: Common Exception messages for Additional EN-DC FR1-FR2 event triggered reporting tests without SSB time index detection in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ. For Test 3 and 4, additionally with condition GAP NEEDED Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4AA with A4-threshold = -105 Table H.3.1-6 with Conditions gapFR2 and Pattern #13 for Test 3 and Test 4 Table H.3.4-4 with Condition gapUE Test 1 and Test 2 Table H.3.4-5 with Condition Pattern #0 for Test 1 and Test 2 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 for Test 1 and Test 3 Table H.3.7-1 with Condition DRX.2 for Test 2 and Test 4 Table H.3.4-1 Table H.3.4-2 Table H.3.4-3

Table 5.6.2.6.4.3-2: MeasObjectNR-DEFAULT: EN-DC FR1-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	6 dB		
}			

5.6.2.6.5 Test requirement

Table 5.6.2.6.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.2.6.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6	NA		Setup 1 as specified in clause A.9	
Assumption for UE beams Note 7		Config 1,2,3,4,5,6	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD		TDD	
		Config 2,3,5,6	TDD		TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
TDD configuration		Config 2,5	TDDConf.1.1		TDDConf.3.1	
		Config 3,6	TDDConf.2.1		TDDConf.3.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
OCNG Patterns		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR2.1 TDD			
Dedicated CORESET RMC configuration		Config 1,4	CCR.1.1 FDD		CCR.3.1 TDD	
		Config 2,5	CCR.1.1 TDD		CCR.3.1 TDD	
		Config 3,6	CCR.2.1 TDD		CCR.3.1 TDD	
SMTC configuration		Config 1,4	SMTC.2		SMTC.2	
		Config 2,3,5,6	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15		120	
		Config 3,6	30		120	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz Note5				-104.7	

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
N_{oc} Note2	dBm/SCS Note4	Config 1,2,4,5	NA Link only, see clause A.6A		-95.7	
		Config 3,6			-95.7	
SSB_RP Note 3	dBm/SCS Note5	Config 1,2,4,5			-Infinity	-86.7
		Config 3,6			-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6			-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6			-Infinity	9
Io Note3	dBm/9.36MHz	Config 1,2,4,5			-	-
	dBm/38.16MHz	Config 3,6			-	-
	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6			-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6			AWGN	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
NOTE 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
NOTE 7: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

In test 1, 2, 3 and 4 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 7682 ms for power class 1 UE and 4802 ms for other power classes in test 1 and test 3 and 81922 for power class 1 UE and 51202 ms for other power classes in test 2 and test 4.

5.6.2.7 EN-DC FR1-FR2 event-triggered reporting in non-DRX with SSB time index detection

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- NR FR1 - FR2 OTA testability is still FFS.

5.6.2.7.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements with SSB time index detection.

5.6.2.7.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC. Test 2 is applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306) and Gap Pattern Id 13, otherwise Test 1 is applicable.

5.6.2.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.2.7.

5.6.2.7.4 Test description

5.6.2.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.2.7.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 5.6.2.7.4.1-2. Test environment parameters are given in Table 5.6.2.7.4.1-3.

Table 5.6.2.7.4.1-1: EN-DC FR1-FR2 event triggered reporting tests in non-DRX with SSB time index detection supported test configurations

Test Case ID	Description of serving cell	Description of target cell
5.6.2.7-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.2.7-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
5.6.2.7-3	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
5.6.2.7-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	
5.6.2.7-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
5.6.2.7-6	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
NOTE 1: The UE is only required to be tested in one of the supported test configurations NOTE 2: The target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2		

Table 5.6.2.7.4-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		One FR1 and one FR2 NR carrier frequency is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	13	As specified in TS 38.133 clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39	39	
SMTC-SSB parameters on NR RF Channel 1		Config 1,4	SSB.1 FR1		As specified in clause A.3
		Config 2,5	SSB.1 FR1		As specified in clause A.3

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
		Config 3,6	SSB.2 FR1		As specified in clause A.3
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2		As specified in clause A.3
offsetMO	dB	Config 1,2,3,4,5,6	6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	7 for PC1; 4.5 for other PC	7 for PC1; 4.5 for other PC	PC1 – power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 5.6.2.7.4-3: Test Environment test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and NR FR1, 7.2.3 for NR FR2		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.2.7.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 5.6.2.7.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR2 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and Cell 3 are set according to Annex TBD

3. The UE Rx beam peak direction for Cell 3 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

5.6.2.7.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as Pcell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2.

In test 1 measurement gap pattern configuration # 0 as defined in Table 5.6.2.7.4.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table 5.6.2.7.4.1-2 is provided for UE that support per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.2.7.4-2 The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction. T1 starts.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.2.7.4.1-2.

6. UE shall transmit a MeasurementReport message triggered by Event A4 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than 6722 ms for UE supporting power class 1, or 4162 ms for UE supporting other power class for Test 1 and Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 3 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. After the RRC connection release, the SS:

   - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 5.6.2.7.41.-2 as appropriate.

5.6.2.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.2.7.4.3-1: Common Exception messages for Additional EN-DC FR1-FR2 event triggered reporting tests with SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions and INTER-FREQ. For Test 2, additionally with condition GAP NEEDED Table H.3.1-3 with conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4AA with condition SSB Index and A4-threshold = -105 Table H.3.1-6 with conditions gapFR2 and Pattern #13 for Test 2 Table H.3.4-4 with condition gapUE for Test 1 Table H.3.4-5 with condition Pattern #0 for Test 1 Table H.3.1-7 with condition SSB Index and INTER-FREQ Table H.3.4-1 Table H.3.4-2 Table H.3.4-3 Table H.3.1-4 A4 threshold = -105

Table 5.6.2.7.4.3-2: MeasObjectNR-DEFAULT: EN-DC FR1-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	6 dB		
}			

5.6.2.7.5 Test requirement

Table 5.6.2.7.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.2.7.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6	NA		Setup 1	
Assumption for UE beams[Note 7]		Config 1,2,3,4,5,6	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD		TDD	
		Config 2,3,5,6	TDD		TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
OCNG Patterns		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR.2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR.2.1 TDD			
Dedicated CORESET RMC configuration		Config 1,4	CCR.1.1 FDD		CCR.3.1 TDD	
		Config 2,5	CCR.1.1 TDD		CCR.3.1 TDD	
		Config 3,6	CCR.2.1 TDD		CCR.3.1 TDD	
TDD configuration		Config 2,5	TDDConf.1.1		TDDConf.3.1	
		Config 3,6	TDDConf.2.1		TDDConf.3.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
SMTC configuration		Config 1,4	SMTC.2		SMTC.2	
		Config 2,3,5,6	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15		120	

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
		Config 3,6	30		120	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/SCS	Config 1,2,3,4,5,6	Link only, see clause A.6A		-Infinity	-87
SSB_RP Note 3	dBm/SCS Note5	Config 1,2,3,4,5,6			-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1,2,3,4,5,6			-Infinity	14.69
Io Note3	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6			-Infinity	-58.01
Propagation Condition		Config 1,2,3,4,5,6			No external noise (NOTE 9)	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Void
NOTE 3: SS-RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Void
NOTE 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 6: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 7: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
NOTE 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
NOTE 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

In test 1 and 2 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 6722 ms in this test for power class UE and 4162 ms for other power classes.

5.6.2.8 EN-DC FR1-FR2 event-triggered reporting in DRX with SSB time index detection

Editor's note: This test case is incomplete. The following aspects are either missing or TBD:

- NR FR1 - FR2 OTA testability is still FFS.

5.6.2.8.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in DRX within inter-frequency cell search requirements with SSB time index detection.

5.6.2.8.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR2 and long DRX cycle. Tests 3 and 4 are applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306) and Gap Pattern Id 13, otherwise Tests 1 and 2 are applicable.

5.6.2.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.

5.6.2.8.5.6.2.8.4 Test description

5.6.2.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.2.8.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 5.6.2.8.4.1-2. Test environment parameters are given in Table 5.6.2.8.4.1-3.

Table 5.6.2.8.4.1-1: EN-DC FR1-FR2 event triggered reporting tests in DRX with SSB time index detection supported test configurations

Test Case ID	Description of serving cell	Description of target cell
5.6.2.8-1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5.6.2.8-2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
5.6.2.8-3	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
5.6.2.8-4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	
5.6.2.8-5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
5.6.2.8-6	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
NOTE 1: The UE is only required to be tested in one of the supported test configurations NOTE 2: The target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2		

Table A.5.6.2.8.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in DRX

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1				One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2				One FR1 and one FR2 NR carrier frequency is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3				NR cell 3 is on NR RF channel number 2.

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
Gap Pattern Id		Config 1,2,3,4,5,6	0		13		As specified in TS 38.133 clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39		39		
SMTC-SSB parameters on NR RF Channel 1		Config 1,4	SSB.1 FR1				As specified in clause A.3
		Config 2,5	SSB.1 FR1				As specified in clause A.3
		Config 3,6	SSB.2 FR1				As specified in clause A.3
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2				As specified in clause A.3
offsetMO	dB	Config 1,2,3,4,5,6	6				
Hysteresis	dB	Config 1,2,3,4,5,6	0				
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105				
CP length		Config 1,2,3,4,5,6	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6	0				
Filter coefficient		Config 1,2,3,4,5,6	0				L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX.1	DRX.2	DRX.1	DRX.2	As specified in clause A.5
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 µs				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms				Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3µs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5				
T2	s	Config 1,2,3,4,5,6	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	PC1 - power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 5.6.2.8.4-3: Test Environment test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and NR FR1, 7.2.3 for NR FR2		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.2.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 5.6.2.8.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR2 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and Cell 3 are set according to Annex TBD.

3. The UE Rx beam peak direction for Cell 3 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

5.6.2.8.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table 5.6.2.8.4.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table 5.6.2.8.4.1-2 is provided for UE that support per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.2.8.4-2 The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction. T1 starts,

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.2.8.4.1-2.

6. UE shall transmit a MeasurementReport message triggered by Event A4 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than 10082 ms for UE supporting power class 1, or 6242 ms for UE supporting other power class for Test 1 and Test 3 and 107522 ms for UE supporting power class 1, or 66562 ms for UE supporting other power class for Test 2 and Test 4, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 3 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. After the RRC connection release, the SS:

   - transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 5.6.2.8.4.1-2 as appropriate.

5.6.2.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.2.8.4.3-1: Common Exception messages for Additional EN-DC FR1-FR2 event triggered reporting tests with SSB time index detection in DRX

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ. For Test 3 and 4, additionally with condition GAP NEEDED Table H.3.1-3 with conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4AA with condition SSB Index and A4-threshold = -105 Table H.3.1-6 with conditions gapFR2 and Pattern #13 for Test 3 and Test 4 Table H.3.4-4 with condition gapUE for Test 1 and Test 2 Table H.3.4-5 with condition Pattern #0 for Test 1 and Test 2 Table H.3.1-7 with condition SSB Index and INTER-FREQ Table H.3.7-1 with condition DRX.1 for Test 1 and Test 3 Table H.3.7-1 with condition DRX.2 for Test 2 and Test 4 Table H.3.4-1 Table H.3.4-2 Table H.3.4-3

Table 5.6.2.5.8.3-2: MeasObjectNR-DEFAULT: EN-DC FR1-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	6 dB		
}			

5.6.2.8.5 Test requirement

Table 5.6.2.8.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.2.8.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6	NA		Setup 1 as specified in clause A.9	
Assumption for UE beams[Note 7]		Config 1,2,3,4,5,6	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD		TDD	
		Config 2,3,5,6	TDD		TDD	
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,4	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 2,5	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
		Config 3,6	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
OCNG Patterns		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR2.1 TDD			
Dedicated CORESET RMC configuration		Config 1,4	CCR.1.1 FDD		CCR.3.1 TDD	
		Config 2,5	CCR.1.1 TDD		CCR.3.1 TDD	
		Config 3,6	CCR.2.1 TDD		CCR.3.1 TDD	
TDD configuration		Config 2,5	TDDConf.1.1		TDDConf.3.1	
		Config 3,6	TDDConf.2.1		TDDConf.3.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
SMTC configuration		Config 1,4	SMTC.2		SMTC.2	
		Config 2,3,5,6	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15		120	
		Config 3,6	30		120	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		NA Link only, see clause A.6A		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1,2,4,5			-95.7	
		Config 3,6			-95.7	
SSB_RP Note 3	dBm/SCS Note5	Config 1,2,4,5			-Infinity	-86.7
		Config 3,6			-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6			-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6			-Infinity	9
Io Note3	dBm/9.36MHz	Config 1,2,4,5			-	-
	dBm/38.16MHz	Config 3,6			-	-
	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6			-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6			AWGN	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

NOTE 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

NOTE 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

NOTE 6: As observed with 0dBi gain antenna at the centre of the quiet zone

NOTE 7: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

In test 1, 2, 3 and 4 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 10082 ms for power class 1 UE and 6242 ms for other power classes in test 1 and test 3 and 107522 for power class 1 UE and 66562 ms for other power classes in test 2 and test 4.

5.6.3 L1-RSRP measurement for beam reporting

5.6.3.0 Minimum conformance requirements

5.6.3.0.1 Minimum conformance requirements for SSB-based L1-RSRP measurement for beam reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ is defined in Table 9.5.4.1-2 for FR2, where

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- N= 8.

For FR2,

- $P=\frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when SSB is not overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- P is $P_{sharing\ factor}$, when SSB is not overlapped with measurement gap and SSB is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).
- $P=\frac{1}{1-\frac{T_{SSB}}{MRGP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq$ MGRP or
  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5*T_{SMTCperiod}$

- P is $\frac{P_{\text{sharing factor}}}{1-\frac{T_{SSB}}{MRGP}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5*T_{SMTCperiod}$

- P= $\frac{1}{1-\frac{T_{SSB}}{\min(T_{SMTCperiod},MGRP)}}$, when SSB is partially overlapped with measurement gap (T_{SSB} <MGRP) and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- P is $\frac{P_{\text{sharing factor}}}{1-\frac{T_{SSB}}{MRGP}}$, when SSB is partially overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

- $P_{\text{sharing factor}} = 1$, if the SSB configured for L1-RSRP measurement outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, and,

  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,

- $P_{\text{sharing factor}} = 3$, otherwise.

Where:

- T_{SSB} = ssb-periodicityServingCell

- $T_{SMTCperiod}$ = the configured SMTC period

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 9.5.4.1-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{SSB})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5 K *M*P)*max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	ceil(M*P)*T_{DRX}
NOTE 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. NOTE 2: K = 1 when T_{SSB} ≤ 40 ms and RRM enhancements for high speed are configured; otherwise K = 1.5.	

Table 9.5.4.1-2: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ for FR2

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P*N)*T_{SSB})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	ceil(1.5*M*P*N)*T_{DRX}
NOTE: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

The normative reference for this requirement is TS 38.133 [6] clause 9.5.3.1, 9.5.4.1 and 9.5.5.1.

5.6.3.0.2 Minimum conformance requirements for CSI-RS-based L1-RSRP measurement for beam reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ is defined in Table 9.5.4.2-2 for FR2, where

- For periodic and semi-persistent CSI-RS resources, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- For aperiodic CSI-RS resources M=1
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured with QCL-TypeD for all resources in the resource set.
- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided with QCL-TypeD for all resources in the resource set in the MAC CE activating the resource set.
- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.19.2 and 10.1.20.2 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured with QCL-TypeD for all resources in the resource set.

For FR2,

- P=1, when CSI-RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is not overlapped with SMTC occasion ($T_{CSI\text{-}RS}$ < MGRP)
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI\text{-}RS} < T_{SMTCperiod}$).

- $P=P_{sharing\ factor}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}\cdot\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion (TCSI-RS < $T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} < 0.5*T_{SMTCperiod}$

- $P=\frac{3}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} = 0.5*T_{SMTCperiod}$

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{\min(T_{SMTCperiod},MGRP)}}$, when CSI-RS is partially overlapped with measurement gap (T_{CSI-RS} < MGRP) and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- $P=\frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

- $P_{sharing\ factor}$ = 1, if the CSI-RS configured for L1-RSRP measurement outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, and,

  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured

- $P_{sharing\ factor}$ = 3, otherwise.

Where:

$T_{SMTCperiod}$ = the configured SMTC period.

T_{CSI-RS} = the periodicity of CSI-RS configured for L1-RSRP measurement

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

NOTE: The overlap between CSI-RS for L1-RSRP measurement and SMTC means that CSI-RS for L1-RSRP measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 9.5.4.2-2: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for FR2

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P*N)*$T_{CSI\text{-}RS}$)
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},$T_{CSI\text{-}RS}$))
DRX cycle > 320ms	ceil(M*P*N)*T_{DRX}

NOTE 1:	T_{CSI-RS} is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
NOTE 2:	the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send aperiodic L1-RSRP measurement reports, if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.2.1.2 in TS 38.214 [26].

For both FR1 and FR2, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM/BFD/CBD/L1-RSRP measurement, UE is not required to receive CSI-RS for L1-RSRP measurement in the PRBs that overlap with an SSB.

For FR2, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM/BFD/L1-RSRP measurement, or in the same symbol as SSB for CBD when beam failure is detected, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as another CSI-RS for RLM/BFD/CBD/L1-RSRP measurement,

- In the following cases, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and the other CSI-RS. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.
  - The CSI-RS for L1-RSRP measurement or the other CSI-RS in a resource set configured with repetition ON, or
  - The other CSI-RS is configured in q1 and beam failure is detected, or
  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clauses 9.5.3.1, 9.5.4.2 and 9.5.5.2.

5.6.3.1 EN-DC FR2 SSB-based L1-RSRP measurement in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test case is incomplete for extreme conditions

5.6.3.1.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.1.

5.6.3.1.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

5.6.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.3.1.

5.6.3.1.4 Test description

5.6.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.3.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 5.6.3.1.4.1-2. Test environment parameters are given in Table 5.6.3.1.4.1-3.

Table 5.6.3.1.4.1-1: EN-DC SSB based L1-RSRP measurement supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations	

Table 5.6.3.1.4.1-2: General test parameters for EN-DC SSB based L1-RSRP measurement

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD Configuration	1~4		TDDConf.3.1
$BW_{channel}$	1~4	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~4		66
PDSCH Reference measurement channel	1,2		SR.3.2 TDD
	3,4		SR.3.3 TDD
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD
	3,4		CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD
	3,4		CCR.3.7 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~4		SMTC.1
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
DRX configuration	1~4		Off
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	320
T1	1~4	s	5
T2	1~4	s	2
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			

Parameter	Config	Unit	Value
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 5.6.3.1.4.1-3: Test Environment parameters for EN-DC SSB based L1-RSRP measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.6.3.1.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

5.6.3.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 5.6.3.1.4.1-2. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 5.6.3.1.4.1-2. SSB#1 shall be muted during this step.

2. Set the parameters according to T1 in Table 5.6.3.1.5-1.

3. T1 starts. The UE shall be transmitting CSI on PUCCH with a periodicity of 320 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 5.6.3.1.5-1. T2 starts.

5. The UE shall start sending valid L1-RSRP reports. The SS shall check the following requirements:

   - R1: the UE shall start to transmit valid L1-RSRP reports no later than 1760ms for UE supporting power class 1 in configuration 1 and 2, no later than 1720 ms for UE supporting power class 1 in configuration 3 and 4 , no later than 1280 ms for UE supporting power class other than 1 in configuration 1 and 2, no later than 1240 ms for UE supporting power class other than 1 in configuration 3 and 4 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 Table 5.6.3.1.5-2 for test configurations 1 and 2 and the corresponding absolute accuracy requirements in Table 5.6.3.1.5-3 for test configurations 3 and 4. If the first valid report is received before the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the UE shall transmit L1-RSRP reports every 320 slots. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

-R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding absolute accuracy requirements in Table 5.6.3.1.5-2 for test configurations 1 and 2 and the corresponding absolute accuracy requirements in Table 5.6.3.1.5-3 for test configurations 3 and 4 the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

-R4: The DIFF-RSRP value of SSB#0 reported by the UE is compared to the expected DIFF-RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding relative accuracy requirements in Table 5.6.3.1.5-4 for all test configurations, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

8. Set the parameters according to T1 in Table 5.6.3.1.5-1. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

9. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 3-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.6.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.3.1.4.3-1: Common Exception messages EN-DC SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10 Table H.3.4-1

Table 5.6.3.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

5.6.3.1.5 Test requirement

Table 5.6.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.3.1.5-1: SSB specific test parameters for EN-DC SSB based L1-RSRP measurement

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.9			
Assumption for UE beams Note 4	1~4		Rough			
N_{oc} Note2	1~4	dBm/15kHz	-105			
N_{oc} Note2	1,2	dBm/SSB SCS	-96			
	3,4		-93			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	9
SSB_RP Note3	1,2	dBm/SSB SCS	-96	-96	-Infinity	-87
	3,4		-93	-93	-Infinity	-84
Io Note3	1,2	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	3,4		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	9

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Information about types of UE beam is given in TS 38.133 Annex B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 1680 for UE supporting power class 1
- 1200 for UE supporting power class 2, 3 or 4.

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 5.6.3.1.5-2 for for test configurations 1 and 2 and the corresponding absolute accuracy requirements in Table 5.6.3.1.5-3 for test configurations 3 and 4 and the corresponding relative accuracy requirements in Table 5.6.3.1.5-4 for all test configurations.

Table 5.6.3.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	40
Highest reported value (SSB#1)	-	99

Table 5.6.3.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3 and 4 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	43
Highest reported value (SSB#1)	-	102

Table 5.6.3.1.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations (R4)

	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	1

Highest DIFF RSRP reported (SSB#0)	-	7

For the test to pass, the ratio of successful reported valued for each requirement (R1 to R4) shall be at least 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.6.3.2 EN-DC FR2 SSB-based L1-RSRP measurement in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test case is incomplete for extreme conditions

5.6.3.2.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.1.

5.6.3.2.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR2 and long DRX cycle.

5.6.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.3.2.

5.6.3.2.4 Test description

5.6.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.3.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 5.6.3.2.4.1-2. Test environment parameters are given in Table 5.6.3.2.4.1-3.

Table 5.6.3.2.4.1-1: EN-DC SSB based L1-RSRP measurement in DRX supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations	

Table 5.6.3.2.4.1-2: General test parameters for EN-DC SSB based L1-RSRP measurement in DRX

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD Configuration	1~4		TDDConf.3.1
$BW_{channel}$	1~4	MHz	100: $N_{RB,c}$ = 66

Parameter	Config	Unit	Value
Data RBs allocated	1~4		66
PDSCH Reference measurement channel	1,2		SR.3.2 TDD
	3,4		SR.3.3 TDD
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD
	3,4		CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD
	3,4		CCR.3.7 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~4		SMTC.1
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
DRX configuration	1~4		DRX.3
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	320
T1	1~4	s	5
T2	1~4	s	3
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 5.6.3.2.4.1-3: Test Environment parameters for EN-DC SSB based L1-RSRP measurement in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.6.3.2.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

5.6.3.2.4.2 Test procedure

Same as in 5.6.3.1.4.2 with the following exception:

5. The UE shall start sending valid L1-RSRP reports. The SS shall check the following requirements:

- R1: the UE shall start to transmit valid L1-RSRP reports no later than 2960ms for UE supporting power class 1 in configuration 1 and 2, no later than 2920ms for UE supporting power class 1 in configuration 3 and 4 , no later than 2000ms for UE supporting power class other than 1 in configuration 1 and 2, no later than 1960 ms for UE supporting power class other than 1 in configuration 3 and 4 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 Table 5.6.3.2.5-2 for test configurations 1 and 2 and the corresponding absolute accuracy requirements in Table 5.6.3.2.5-3 for test configurations 3 and 4. If the first valid report is received before the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

- R2: the UE shall transmit L1-RSRP reports every 320 slots. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

-R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding absolute accuracy requirements in Table 5.6.3.2.5-2 for test configurations 1 and 2 and the corresponding absolute accuracy requirements in Table 5.6.3.2.5-3 for test configurations 3 and 4 the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

-R4: The DIFF-RSRP value of SSB#0 reported by the UE is compared to the expected DIFF-RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding relative accuracy requirements in Table 5.6.3.2.5-4 for all test configurations, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

5.6.3.2.4.3 Message contents

Same message content as in subclause 5.6.3.1.4.3 with the following exception:

Table 5.6.3.2.4.3-1: Common Exception messages EN-DC SSB based L1-RSRP measurement in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3

5.6.3.2.5 Test requirement

Table 5.6.3.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.3.2.5-1: SSB specific test parameters for EN-DC SSB based L1-RSRP measurement in DRX

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.9			
Assumption for UE beams Note 4	1~4		Rough			
N_{oc} Note2	1~4	dBm/15kHz	-105			
N_{oc} Note2	1,2	dBm/SSB SCS	-96			
	3,4		-93			
$\hat{E}_s/I_{ot}$	1~4	dB	0	0	-Infinity	9
SSB_RP Note3	1,2	dBm/SSB SCS	-96	-96	-Infinity	-87
	3,4		-93	-93	-Infinity	-84
Io Note3	1,2	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	3,4		-63.97	-63.97	-66.98	-57.47

$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	9
NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
NOTE 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 5.6.3.2.5-2 for test configurations 1 and 2 and the corresponding absolute accuracy requirements in Table 5.6.3.2.5-3 for test configurations 3 and 4 and the corresponding relative accuracy requirements in Table 5.6.3.2.5-4 for all test configurations.

Table 5.6.3.2.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	40
Highest reported value (SSB#1)	-	99

Table 5.6.3.2.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3 and 4 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	43
Highest reported value (SSB#1)	-	102

Table 5.6.3.2.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations (R4)

	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	1
Highest DIFF RSRP reported (SSB#0)	-	7

For the test to pass, the ratio of successful reported valued for each requirement (R1 to R4) shall be at least 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.6.3.3 EN-DC FR2 CSI-RS-based L1-RSRP measurement in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test case is incomplete for extreme conditions

5.6.3.3.1 Test purpose

To verify that the UE makes correct reporting of CSI-RS-based L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.2.

5.6.3.3.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC.

5.6.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.3.3.

5.6.3.3.4 Test description

5.6.3.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.3.3.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 5.6.3.3.4.1-2. Test environment parameters are given in Table 5.6.3.3.4.1-3.

Table 5.6.3.3.4.1-1: EN-DC FR2 CSI-RS based L1-RSRP measurement supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations	

Table 5.6.3.3.4.1-2: General test parameters for EN-D FR2 C CSI-RS based L1-RSRP measurement

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1~2		SR.3.3 TDD
RMSI CORESET Reference Channel	1~2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.7 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		Off
reportConfigType	1~2		aperiodic
reportQuantity	1~2		cri-RSRP
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0

			SSB#1 for resource#1
reportSlotOffsetList	1~2		8
Propagation condition	1~2		AWGN
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 5.6.3.3.4.1-3: Test Environment parameters for EN-DC FR2 CSI-RS L1-RSRP measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.3.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 5.6.3.3.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

5.6.3.3.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. UE is also configured to measure L1-RSRP based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in table 5.6.3.3.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.3.3.5-1. T1 starts.

3. After 480ms from the start of the test the SS transmits the DCI trigger in slot 1.

4. The SS shall check following requirements:

   - R1: the UE shall send L1-RSRP report at slot 9 from the reception of DCI trigger. If the report is received at slot 9 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the L1-RSRP value of CSI-RS#1 reported by the UE is compared to the expected L1-RSRP value for CSI-RS #1. If the resulting value is outside the limits in Table 5.6.3.3.5-2 or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

-R3: The DIFF RSRP value of CSI-RS #0 reported by the UE is compared to the expected DIFF RSRP value. If the resulting value is outside the limits in Table 5.6.3.3.5-33 or the UE fails to report the measurement value for CSI-RS #0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

5. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

8. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.6.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.3.3.4.3-1: Common Exception messages EN-DC CSI-RS based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions APERIODIC and CSI-RSRP Table H.3.6-3 with conditions CSI-RS and APERIODIC Table H.3.4-1

Table 5.6.3.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

Table 5.6.3.3.4.3-3: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [14], Table 7.2.2.1-1			
Parameter	**Value**	**Value in binary**	**Condition**

PDSCH-to-HARQ_feedback timing indicator	For 120KHz SCS: K1 = N/A if mod(i,5) = 2 - PDSCH not scheduled (K1=2 and K1=12 are the possible settings to fall into a different UL slot than CSI Report. But K1=12 is not defined in RRC and K1=12 > PdschNumHarq Process=8. For K1=2, according to TS38.214 Table 5.3-1, considering PDSCH processing time and PUCCH resource index (symbol#0,1), it is better to use different UL slot) K1 = N/A if mod(i,5) = 0 - PDSCH not scheduled (K1=9 is the only possible setting to fall into a different UL slot than CSI Report but K1=9 > PdschNumHarq Process=8) K1 = 8 if mod(i,5) = 1 where i is slot index per frame; i = {2,5,6}	-	FR2

5.6.3.3.5 Test requirement

Table 5.6.3.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.3.3.5-1: CSI-RS specific test parameters for EN-DC FR2 CSI-RS L1-RSRP measurement

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.9	
Assumption for UE beams Note 3	1~2		Rough	
N_{oc} Note1	1~2	dBm/15kHz	-105	
N_{oc} Note1	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9
CSI-RS RSRP Note2	1~2	dBm/SSB SCS	-95.97	-86.97
Io Note2	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	9
NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
NOTE 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
NOTE 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

After 480ms from the beginning of the test, the UE shall send L1-RSRP report at slot 9 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 5.6.3.3.5-2 the corresponding relative accuracy requirements in Table 5.6.3.3.5-3.

Table 5.6.3.3.5-2: L1-RSRP absolute accuracy requirements for the reported values R2

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	40
Highest reported value (CSI-RS#1)	99

Table 5.6.3.3.5-3: L1-RSRP relative accuracy requirements for the reported values R3

	T1
Lowest DIFF RSRP reported (CSI-RS#0)	1
Highest DIFF RSRP reported (CSI-RS#0)	7

The rate of correct events observed during repeated tests (R1 to R3) shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

5.6.3.4 EN-DC FR2 CSI-RS-based L1-RSRP measurement in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test case is incomplete for extreme conditions

5.6.3.4.1 Test purpose

To verify that the UE makes correct reporting of CSI-RS-based L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.2.

5.6.3.4.2 Test applicability

This test applies to all types of E-UTRA UE release 15 and forward, supporting EN-DC FR2 and long DRX cycle.

5.6.3.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.3.4

5.6.3.4.4 Test description

5.6.3.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.3.3.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 5.6.3.3.4.1-2. Test environment parameters are given in Table 5.6.3.3.4.1-3.

Table 5.6.3.4.4.1-1: EN-DC FR2 CSI-RS based L1-RSRP measurement in DRX supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations	

Table 5.6.3.4.4.1-2: General test parameters for EN-D FR2 C CSI-RS based L1-RSRP measurement in DRX

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1~2		SR.3.3 TDD
RMSI CORESET Reference Channel	1~2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.7 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		aperiodic
reportQuantity	1~2		cri-RSRP
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~2		8
Propagation condition	1~2		AWGN
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 5.6.3.4.4.1-3: Test Environment parameters for EN-DC FR2 CSI-RS L1-RSRP measurement

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.	

Channel bandwidth	As specified by the test configuration selected from Table 5.6.3.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 5.6.3.3.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

5.6.3.4.4.2 Test procedure

Same test procedure as in subclause 5.6.3.3.4.2 with tables 5.6.3.3.4.1-2 and 5.6.3.3.5-1 replaced by tables 5.6.3.4.4.1-2 and 5.6.3.4.5-1 and following change in step 3.

3. After 1440ms from the start of the test the SS transmits the DCI trigger in slot 1.

5.6.3.4.4.3 Message contents

Same message content as in subclause 5.6.3.3.4.3 with the following exception:

Table 5.6.3.4.4.3-1: Common Exception messages EN-DC CSI-RS based L1-RSRP measurement in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3 and Offset

5.6.3.4.5 Test requirement

Table 5.6.3.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.3.4.5-1: CSI-RS specific test parameters for EN-DC FR2 CSI-RS L1-RSRP measurement in DRX

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.9	
Assumption for UE beams Note 3	1~2		Rough	
N_{oc} Note1	1~2	dBm/15kHz	-105	
N_{oc} Note1	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9
CSI-RS RSRP Note2	1~2	dBm/SSB SCS	-95.97	-86.97
Io Note2	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	9
NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
NOTE 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

After 1440ms from the beginning of the test, the UE shall send L1-RSRP report at slot 9 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 5.6.3.4.5-2 the corresponding relative accuracy requirements in Table 5.6.3.4.5-3.

Table 5.6.3.4.5-2: L1-RSRP absolute accuracy requirements for the reported values

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	40
Highest reported value (CSI-RS#1)	99

Table 5.6.3.4.5-3: L1-RSRP relative accuracy requirements for the reported values

	T1
Lowest DIFF RSRP reported (CSI-RS#0)	1
Highest DIFF RSRP reported (CSI-RS#0)	7

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

5.6.4 CLI measurements

5.6.4.0 Minimum conformance requirements

5.6.4.0.1 Minimum conformance requirements for SRS-RSRP measurement period

The UE shall be capable of performing SRS-RSRP measurement based on the configured SRS resource, and the UE shall be capable of reporting SRS-RSRP measured over measurement period of $T_{SRS_RSRP_measurement_period}$ for FR1 and FR2.

Table 5.6.4.0.1-1 Measurement period $T_{SRS_RSRP_measurement_period}$

Configuration	$T_{SRS_measurement_period}$ (ms)
No DRX	Max(60, 3 X T_{SRS})
DRX cycle ≤ 320ms	Max(60, Ceil(1.5 X 3) X max(T_{SRS}, T_{DRX}))
DRX cycle > 320ms	3 X T_{DRX}
Note: T_{SRS} is SRS measurement periodicity configured *SRS-PeriodicityAndOffset*, and T_{DRX} is the DRX cycle length.	

If the SRS resources configured for measurement are partially or fully overlapping with SMTC window, SSB or CSI-RS configured for RLM, BFD, CBD or L1-RSRP measurement or measurement gaps, requirements are not specified for $T_{SRS_RSRP_measurement_period}$.

When configured by the network, the UE shall be able to perform SRS-RSRP measurements of configured *srs-ResourceConfigCLI*. The requirements apply when the subcarrier spacing for SRS-RSRP measurement resource configuration is the same as the subcarrier spacing of the active DL BWP of serving cell. The UE is not required to measure SRS using different SCS compared to the downlink active BWP SCS of the same carrier.

The requirements as provided:

- SRS resources configured for SRS-RSRP measurements are measurable.

An SRS resource configured for SRS-RSRP shall be considered measurable when for each relevant SRS the following conditions are met:

- SRS-RSRP related side conditions given in clauses 10.1.22.1 for FR1 and FR2 for a corresponding band,
- SRS_RP and SRS Ês/Iot according to Annex B.2.7 for a corresponding band.

The UE shall send SRS-RSRP reports only for report configurations according to *reportType* which is *cliPeriodical* or *cliEventTriggered* when SRS-RSRP report is configured.

The UE shall report the SRS-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.22.1 for FR1 and FR2.

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.1.

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.22.1.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.7.2.3.3.

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.1.

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report on.

The normative reference for this requirement is TS 38.133 [6] clause 9.7.2.5 and 9.7.2.1, 9.7.2.2 and 9.7.2.3

5.6.4.1 EN-DC FR2 SRS-RSRP measurement in non-DRX

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD

- The test applicability is FFS

- The test procedure is incomplete

- The message content is FFS

- MU/TT analysis for UE PC3 and test frequency f ≤ 40.8 GHz is complete.

- MU/TT analysis for UE power class other than PC3 is incomplete.

- MU//TT analysis for test frequency f > 40.8 GHz is incomplete.

5.6.4.1.1 Test purpose

The purpose of this test case is to verify that the UE makes correct reporting of SRS-RSRP measurement in non-DRX within SRS-RSRP measurement requirements in TS 38.133 [6] clause 9.7.2.5

5.6.4.1.2 Test applicability

FFS

5.6.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.4.0.1

The normative reference for this requirement is TS 38.133 [6] clause 9.7.2.5 and A.5.6.4.1.

5.6.4.1.4 Test description

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2).

5.6.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.4.1.4.1-1.

Table 5.6.4.1.4.1-1: Supported test configurations

Configuration	Description
5.6.4.1 - 1	NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
5.6.4.1 - 2	NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD
	Note: UE is only required to be tested in one of the supported test configurations

Configure the test equipment and the DUT according to the parameters in Table 5.6.4.1.4.1-2.

Table 5.6.4.1.4.1-2: Initial conditions EN-DC FR2 SRS-RSRP measurement in non-DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The test parameters are given in Table 5.6.4.1.4.1-3 below.

2. Message contents are defined in clause 5.6.4.1.4.3.

3. Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2). The test parameters for PSCell is given in Table A.5.6.4.1.4.1-3

. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

Table 5.6.4.1.4.1-3: General test parameters for SRS-RSRP event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	
SRS configuration		1	SRSConf.1	Table A.5.6.4.1.2-4
CP length		1	Normal	
i1-Threshold	dBm	1	-112	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1	DRX.11	
Time offset between DL from serving cell and SRS from test system	µs	1,2	10.67	
T1	s	1	5	
T2	s	1	1	

5.6.4.1.4.2 Test procedure

There are two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2)

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table 5.6.4.1.5-3 and the test parameters for the (virtual) neighbour cell UE in Table 5.6.4.1.5-23. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 5.6.4.1.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1 with event I1 configured.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

Editor's note: the rest of the steps are FFS.

5.6.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

FFS

5.6.4.1.5 Test requirement

Table 5.7.1.1.5-1 defines the cell specific settings for all tests. Table 5.7.1.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

Table 5.6.4.1.5-1: NR Cell specific test parameters for SRS-RSRP event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS configuration			TRS.2.1. TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
Propagation Condition		1	AWGN	

Table 5.6.4.1.5-2: NR OTA Cell specific test parameters for SRS-RSRP event triggered reporting for PSCell and Neighbour cell UE in FR2

Parameter	Unit	Test configuration	Cell 2		Neighbour cell UE	
			T1	T2	T1	T2
AoA setup		1	Setup 1 defined A.9.1			

Beam assumption Note 4		1	Fine			
N_{oc} Note 2	dBm/15 kHz	1	-100.5		-100.5	
N_{oc} Note 2	dBm/SCS	1	-91.5		-91.5	
$\hat{E}_s/I_{ot}$	dB	1	-	-	-infinity	7
$\hat{E}_s/N_{oc}$	dB	1	-	-	-infinity	7
SRS-RSRP Note 3	dBm/SCS kHz	1	-	-	-infinity	-84.5
Io	dBm/95.04 MHz	1	-63.86	-56.07	-63.86	-56.07

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Cell 2 doesn't transmit during the SRS and the 2 previous symbols. Es/NoC is not applied to those symbols.

Table 5.6.4.1.5-3: SRS configuration for measurement reporting

	Field	SRSConf.1	Comments
SRS-ResourceSet	srs-ResourceSetId	0	
	srs-ResourceIdList	0	
	resourceType	Periodic	
	Usage	Codebook	
SRS-Resource	SRS-ResourceId	0	
	nrofSRS-Ports	Port1	
	transmissionComb	n2	
	combOffset-n2	0	
	cyclicShift-n2	0	
	resourceMapping startPosition	0	
	resourceMapping nrofSymbols	n1	
	resourceMapping repetitionFactor	n1	
	freqDomainPosition	0	
	freqDomainShift	0	
	freqHopping c-SRS	12	
	freqHopping b-SRS	0	
	freqHopping b-hop	0	
	groupOrSequenceHopping	Neither	
	resourceType	Periodic	
	periodicityAndOffset	sl160, 25	
	sequenceId	0	Any 10 bit number

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 60 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

5.6.4.2 EN-DC FR2 CLI-RSSI measurement in non-DRX

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD

- The test applicability is FFS

- The test procedure is incomplete

- The message content is FFS

- TT analysis is missing.

5.6.4.2.1 Test purpose

The purpose of this test case is to verify that the UE makes correct reporting of CLI-RSSI measurement in non-DRX within CLICLI-RSSI measurement requirements in TS 38.133 [6] clause 9.7.3.5

5.6.4.2.2 Test applicability

FFS

5.6.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.4.0.1

The normative reference for this requirement is TS 38.133 [6] clause 9.7.2.5 and A.5.6.4.2.

5.6.4.2.4 Test description

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2).

5.6.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.4.2.4.1-1.

Table 5.6.4.2.1-1: Applicable NR configurations for FR2 CLI-RSSI test

Configuration	Description
1	NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 5.6.4.2.4.1-2.

Table 5.6.4.2.4.1-2: Initial conditions EN-DC FR2 CLI-RSSI measurement in non-DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The test parameters are given in Table 5.6.4.2.4.1-3 below.

2. Message contents are defined in clause 5.6.4.2.4.3.

3. Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2). The test parameters for PSCell is given in Table 5.6.4.2.4.1-3

   The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

Table 5.6.4.2.4.1-3: General test parameters for CLI-RSSI event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	
CLI-RSSI configuration		1	CLI-RSSIConf.1	Table 5.6.4.2.5-3
CP length		1	Normal	
i1-Threshold	dBm	1	-94.5	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	DRX.11	
Time offset between DL from serving cell and OCNG from test system	µs	1	10.67	
T1	s	1	5	
T2	s	1	1	

5.6.4.2.4.2 Test procedure

There are two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2)

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table 5.6.4.2.5-3 and the test parameters for the (virtual) neighbour cell UE in Table 5.6.4.2.5-23. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 5.6.4.2.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1 with event I1 configured.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

Editor's note: the rest of the steps are FFS.

5.6.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

FFS

5.6.4.2.5 Test requirement

Table 5.7.1.1.5-1 defines the cell specific settings for all tests. Table 5.7.1.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

Table 5.6.4.2.5-1: NR Cell specific test parameters for CLI-RSSI event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
PUSCH parameters		1	N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns Note 1		1	OP.1	
TRS configuration			TRS.2.1. TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
Propagation Condition		1	AWGN	
Note 1: OCNG is not transmitted in the CLI-RSSI measurement resources.				

Table 5.6.4.2.5-2: NR OTA Cell specific test parameters for CLI-RSSI event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup		1	Setup 1 defined in A.9.1	
Beam assumption Note 3		1	Fine	
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/15 kHz	1	-119+TT	-108+TT
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/SCS	1	-110	-99
Io on CLI-RSSI measurement resource	dBm/95.04 MHz	1	-81.01	-70.01
Io on CLI-RSSI measurement resource	dBm/1.08 MHz	1	-100.46	-89.46
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.				

Table 5.6.4.2.5-3: CLI-RSSI measurement resource configuration for measurement reporting

	Field	CLI-RSSIConf.1
RSSI-Resource	rssi-ResourceId	0
	rssi-SCS	120
	startPRB	0
	nrofPRBs	66
	startPosition	3
	nrofSymbols	11
	rssi-PeriodicityAndOffset	sl160, 25

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 20 ms from the beginning of time period T2. The nominal RSSI used to evaluate the requirement shall be based on Io.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

5.6.5 Measurements with autonomous gaps

5.6.5.0 Minimum conformance requirements

5.6.5.0.1 Minimum conformance requirements for EN-DC inter-frequency CGI identification of NR neighbour cell in FR2

[TS38.133, Clause 9.11]

5.6.5.0.1.1 Introduction

The requirements in this clause are applicable for CGI identification of an intra frequency and inter frequency NR target cell.

The requirements in this clause are specified for CGI identification of an NR target cell and are applicable for a UE:

- in RRC_CONNECTED state, and
- configured with SA or NR-DC or NE-DC operation mode, or with EN-DC operation mode for CGI identification requested by NR PSCell.

The overall CGI reporting delay is defined in clause 5.6.5.0.1.3.

The measurement reporting delay can be longer for the measurement reporting requirements in this clause when IDC autonomous denial is configured.

5.6.5.0.1.2 CGI identification of an NR cell with autonomous gaps

The UE shall identify and report the CGI of a known NR target cell when requested by the network for the purpose of reportCGI. Only one cell is provided to the UE with *cellForWhichToReportCGI* for identifying the CGI. The UE may make autonomous gaps in both downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3 in TS 38.331 [13]. Note that a UE is not required to use autonomous gap if *useAutonomousGaps* is set to false. If autonomous gaps are used for measurement with the purpose of reportCGI, regardless of whether DRX is used or not, or whether SCell(s) are configured or not, the UE shall be able to identify a new CGI of NR cell within:

$$T_{identify_CGI} = (T_{MIB} + T_{SIB1})\ ms$$

Where:

T_{MIB} is the time period used to acquire MIB message. $T_{MIB} = 6 * T_{SMTC}$ ms for target cell carrier frequency on FR1 and $T_{MIB} = 25 * T_{SMTC}$ ms for target cell carrier frequency on FR2.

T_{SIB1} is the time period used to acquire SIB1 message. $T_{SIB1} = 6 * T_{RMSI\text{-}scheduling}$ ms.

Where T_{SMTC} is the SMTC periodicity configured for the target cell measurement, and $T_{RMSI\text{-}scheduling}$ is

- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and 20ms when SSB and RMSI CORESET multiplexing pattern is 1
- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and T_{SMTC} when SSB and RMSI CORESET multiplexing pattern is 2 or 3.

The requirement for identifying the CGI of an NR cell within $T_{identify_CGI}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [13] is used.

Within the time $T_{identify_CGI}$, over which the UE identifies the CGI of an NR cell, the UE shall fulfil interruption requirements specified in,

- Clause 8.2.1.2.16 in TS 38.133 [6] for NR serving cells and Clause 7.32.2.15 in TS36.133 [29] for E-UTRA serving cells if the UE is configured with EN-DC operation mode,
- Clause 8.2.2.2.14 in TS 38.133 [6] if the UE is configured with SA operation mode,
- Clause 8.2.3.2.14 in TS 38.133 [6] for NR serving cells and Clause 7.36.2.14 in TS36.133 [29] for E-UTRA serving cells if the UE is configured with NE-DC operation mode,
- Clause 8.2.4.2.11 in TS 38.133 [6] if the UE is configured with NR-DC operation mode.

In the requirement a cell is known if,

- During the last 5 seconds for FR1 or 3 seconds for FR2 before the reception of the report CGI command:
  - The UE has sent a valid L3-RSRP measurement report with SSB index for the target cell and
- During MIB decoding at least reported SSBs remains detectable according to the cell identification conditions specified in clauses 9.2 or 9.3 in TS 38.133 [6], and
- During SIB1 decoding the SSB used for MIB decoding remains detectable according to the cell identification conditions specified in clauses 9.2 or 9.3 in TS 38.133 [6], and
- During MIB decoding, the SSB for MIB decoding remains detectable with SNR $\geqslant$-3dB
- During SIB1 decoding, the PDSCH for SIB1 decoding remains detectable with SNR $\geqslant$-3dB

5.6.5.0.1.3 CGI reporting delay

The CGI reporting delay is defined as the time between a command that will trigger a CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI}$ defined in clause 5.6.5.0.1.2 plus RRC procedure delay defined in clause 12 in TS 38.331 [13], and additional 20ms margin if target cell is on FR2.

5.6.5.1 EN-DC inter-frequency CGI identification of NR neighbour cell in FR2

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing
- TT analysis is missing

5.6.5.1.1 Test purpose

The purpose of this test is to verify the requirements for inter-frequency identification of a new CGI of NR FR2 cell with autonomous gaps in clause 9.11 in 38.133 [6] for EN-DC.

5.6.5.1.2 Test applicability

This test applies to all types of EN-DC UE Rel-16 and forward supporting EN-DC with PSCell in FR2 and supporting acquisition of CGI from neighbour NR cell using autonomous gap, which is controlled by PICS pc_nr_CGI_Reporting.

5.6.5.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 5.6.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.5.1.

5.6.5.1.4 Test description

The test scenario comprises of one E-UTRA carrier and one NR FR2 carrier. Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1) on E-UTRA RF channel 1, NR FR2 PSCell (Cell 2) on NR RF channel 1 and NR FR2 neighbour cell (Cell 3) on NR RF channel 2.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 3. Starting T2, Cell 3 becomes detectable and the UE is expected to detect and send a measurement report with SSB index. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. Gap pattern configuration with id #0 is configured before T2 begins to enable inter-frequency monitoring.

5.6.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.5.1.4.1-1.

Table 5.6.5.1.4.1-1: Supported test configurations for EN-DC inter-frequency CGI identification of NR neighbour cell in FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 5.6.5.1.4.1-2.

Table 5.6.5.1.4.1-2: Initial conditions for EN-DC PSCell FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.2-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for NR Cells are given in Table 5.6.5.1.4.1-3 below. The test parameters and applicability for the E-UTRAN PCell are defined in Table A.3.7.2.1-1 in TS 38.133 [6]. Cell-specific parameters of NR PSCell are specified in Table 5.6.5.1.5-1 and 5.6.5.1.5-2.
2. Message contents are defined in clause 5.6.5.1.4.3.
3. There are one E-UTRAN cell and two NR cells specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 5.6.5.1.4.1-3: General test parameters for EN-DC inter-frequency CGI identification of NR neighbour cell in FR2

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2	1	One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.

Neighbour cell		Config 1,2	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	As specified in clause 9.1.2-1 in TS 38.133 [6].
Measurement gap offset		Config 1,2	39	
SMTC-SSB parameters		Config 1,2	SSB.3 FR2	As specified in clause A.3.10.2 in TS 38.133 [6]
A3-Offset	dB	Config 1,2	[-30]	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3μs	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	7 for PC1; 4.5 for other PC	
T3	s	Config 1,2	5	

5.6.5.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4. UE is connected to Cell 1 (PCell) on E-UTRAN RF channel 1 (PCC) and to Cell 2 (PSCell) on NR RF channel 1 (PSCC). NR Cell 3 is on NR RF channel 2. Set the parameters according to Tables 5.6.5.1.4.1-3 and 5.6.5.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

2. The SS starts sending PDCCHs indicating new transmissions continuously on Cell 2.

3. T1 starts. At this moment, the UE does not have any timing information of Cell 3.

4. After 5 seconds, T2 starts. A RRC message implying SI reading with autonomous gap shall be sent to the UE during period T2, within 3s after the UE has reported Event A3. The RRC message shall create a measurement report configuration with *reportCGI* and *useAutonomousGaps-r16* setup.

5. After 4.5 seconds, T3 starts. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading is sent to the UE. Measurement gaps shall be deconfigured before the start of T3.

6. If the UE transmits a measurement report containing the cell global identifier of Cell 3 within 775 ms from the start of T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. If it is successful, continue to step 9. Otherwise continue to step 8.

8. Switch the UE OFF and then ON. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.6.5.1.4.3 Message contents

TBD

5.6.5.1.5 Test requirement

Table 5.6.5.1.5-1 defines the cell specific test parameters, not including test tolerances yet [will update after TT analysis].

Table 5.6.5.1.5-1: Cell specific test parameters for EN-DC inter-frequency CGI identification of NR neighbour cell in FR2

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2, T3	T1	T2, T3
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	DLBWP.0.1			
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
RMSI scheduling periodicity	ms	Config 1,2	NA		40	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
TCI configuration		Config 1,2	CSI-RS.Config.0		NA	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
Propagation Condition		Config 1,2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table 5.6.5.1.5-2: OTA cell specific test parameters for EN-DC inter-frequency CGI identification of NR neighbour cell in FR2

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2, T3	T1	T2, T3
AoA setup		Config 1,2	Setup 1 defined in A.3.15.1			
Assumption for UE beams[Note 4]		Config 1,2	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4 + TT	4 + TT	-Infinity	-3 + TT
N_{oc} [Note 2]	dBm/15 KHz	Config 1,2	-102 + TT			
N_{oc} [Note 2]	dBm/SCS	1, 2	-93 + TT			
SS-RSRP	dBm/SCS	1, 2	-89 + TT	-89 + TT	-Infinity	-96 + TT
$\hat{E}_s/N_{oc}$	dB	1~4	4 + TT	4 + TT	-Infinity	-3 + TT
Io	dBm/95.04MHz	1~4	-58.56 + TT		-62.25 + TT	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6], and does not limit UE implementation or test system implementation.
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone

The UE shall transmit a measurement report containing the cell global identifier of cell 3 within 775 milliseconds from the start of T3.

Test requirement = RRC Procedure delay + $T_{identify_CGI}$ + processing time for FR2 + reporting delay

= 10 + (25*20 + 6*40) + 20 + 2ms from the start of T3

= 772 ms, allow 775 ms.

The UE shall be scheduled continuously throughout the test, and from the start of T3 until 775 ms the number of interrupted slots shall not exceed the allowed number as defined in clause 8.2.1.2.16 in TS 38.133 [6].

The maximum number of interrupted slots allowed is 6*48 + 12*49 = 876.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

5.6.6 L1-SINR measurement for beam reporting

5.6.6.0 Minimum conformance requirements

5.6.6.0.1 L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured

The UE shall be capable of performing L1-SINR measurements with the CSI-RS resource configured as CMR and no dedicated resource configured as IMR for L1-SINR computation, and the UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ is defined in Table 9.8.4.1-2 for FR2, where

For the value of M,

- For periodic and semi-persistent CSI-RS resources as CMR, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise;

- For aperiodic CSI-RS resources as CMR, M=1.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.

- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured for all resources in the resource set.

For the value of P in FR2,

- P=1, when CSI-RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is not overlapped with SMTC occasion (T_{CSI-RS} < MGRP)

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).

- P=3, when CSI-RS is not overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

- $T_{SMTCperiod} \neq$ MGRP or
- $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} < 0.5*T_{SMTCperiod}$

- $P=\frac{3}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} = 0.5*T_{SMTCperiod}$

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{\min(T_{SMTCperiod},MGRP)}}$, when CSI-RS is partially overlapped with measurement gap (T_{CSI-RS} < MGRP) and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- $P=\frac{3}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

Where:

$T_{SMTCperiod}$ = the configured SMTC1 period or SMTC2 period if configured.

T_{CSI-RS} = the periodicity of CSI-RS configured for L1-SINR measurement

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Note: The overlap between CSI-RS for L1-SINR measurement and SMTC means that CSI-RS for L1-SINR measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 9.8.4.1-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{CSI-RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{CSI-RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P*N)*T_{DRX}$
Note 1: T_{CSI-RS} is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	

The UE shall send L1-SINR reports only for report configurations configured for the active BWP.

The UE shall report the L1-SINR value as a 7-bit value in the range [-23, 40] dB with 0.5dB step size if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-SINR based reporting. The differential L1-SINR is quantized to a 4-bit value with 1dB step size. The mapping between the reported L1-SINR value and the measured quantity is described in 10.1.16.

Reported L1-SINR measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-SINR reports shall meet the requirements in clauses 10.1.27 for FR1 and 10.1.28 for FR2, respectively.

The UE shall only send aperiodic L1-SINR measurement reports, if a DCI for triggering report has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-SINR reporting on PUSCH over the air interface at the time specified according to clause 5.2.1.4 in TS 38.214 [26].

The UE is required to be capable of measuring L1-SINR without measurement gaps. The UE is required to perform the SSB and CSI-RS/CSI-IM measurements with measurement restrictions as described in the following clauses.

For both FR1 and FR2, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to receive CSI-RS for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR2, when the CSI-RS configured for L1-SINR measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and SSB. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS configured for L1-SINR measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and the other CSI-RS. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.
  - The CSI-RS for L1-SINR measurement or the other CSI-RS in a resource set configured with repetition ON, or
  - The CSI-RS or the other CSI-RS is configured as dedicated IMR for L1-SINR computation with SSB as CMR, or
  - The other CSI-RS is configured in q1 and beam failure is detected, or
  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS configured for L1-SINR measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clause 9.8.3, 9.8.4.1 and 9.8.5.

5.6.6.0.2 L1-SINR reporting with SSB based CMR and dedicated IMR configured

The UE shall be capable of performing L1-SINR measurements with the SSB configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to SSB configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as SSB configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ is defined in Table 9.8.4.2-2 for FR2, where

For the value of M

- For periodic or semi-persistent NZP CSI-RS or CSI-IM resource as dedicated IMR, M=1 if the higher layer parameters *timeRestrictionForChannelMeasurements* and/or *timeRestrictionForInterferenceMeasurements* are configured, and M=3 otherwise;

For the value of N in FR2

- N = 8.

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- the value of P_{CMR} shall be derived in the same way as the value of P used for SSB based L1-RSRP measurement in clause 9.5.4.1, in which the occasions and period of the SSB for CMR shall be used instead.
- the value of P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2, in which the occasions and period of the NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with SSB as CMR and CSI-RS or CSI-IM as IMR, the requirement shall apply if the CSI-RS is configured as IMR with repetition field as "repetition = OFF" or CSI-IM is configured as IMR.

For L1-SINR measurement with SSB as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if SSB occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap.

Table 9.8.4.2-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(1.5*M*P*N)*T_{DRX}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
Note 2: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.	

The UE shall send L1-SINR reports only for report configurations configured for the active BWP.

The UE shall report the L1-SINR value as a 7-bit value in the range [-23, 40] dB with 0.5dB step size if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-SINR based reporting. The differential L1-SINR is quantized to a 4-bit value with 1dB step size. The mapping between the reported L1-SINR value and the measured quantity is described in 10.1.16.

The UE shall transmit the periodic L1-SINR reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

Reported L1-SINR measurements contained in periodic L1-SINR measurement reports shall meet the requirements in clauses 10.1.27 for FR1 and 10.1.28 for FR2, respectively.

For FR2, when the SSB configured as CMR for L1-SINR measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for L1-SINR measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, there is no measurement restriction allowed when the network configures mixed numerology between SSB configured as CMR for L1-SINR measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, provided that UE is capable of independent beam management on this FR2 band pair.

For both FR1 and FR2, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to receive CSI-RS for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR2, when the CSI-RS configured for L1-SINR measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and SSB. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS configured for L1-SINR measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and the other CSI-RS. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.
  - The CSI-RS for L1-SINR measurement or the other CSI-RS in a resource set configured with repetition ON, or
  - The CSI-RS or the other CSI-RS is configured as dedicated IMR for L1-SINR computation with SSB as CMR, or

- The other CSI-RS is configured in q1 and beam failure is detected, or
- The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,

- Otherwise, UE shall be able to measure the CSI-RS configured for L1-SINR measurement without any restriction.

For both FR1 and FR2, when the CSI-IM configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to measure CSI-IM for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR2, when the CSI-IM configured for L1-SINR measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-IM for L1-SINR measurement and SSB. Longer measurement period for L1-SINR measurement is expected, and no requirements are defined.

For FR2, when the CSI-IM configured for L1-SINR measurement on one CC is in the same OFDM symbol as the CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-IM for L1-SINR measurement and CSI-RS. Longer measurement period for L1-SINR measurement is expected, and no requirements are defined.
  - The CSI-RS in a resource set configured with repetition ON, or
  - The CSI-IM or the CSI-RS is configured as dedicated IMR for L1-SINR computation with SSB as CMR, or
  - The CSI-RS is configured in q1 and beam failure is detected, or
  - The CMR for L1-SINR measurement and the CSI-RS are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-IM configured for L1-SINR measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clause 9.8.3, 9.8.4.2 and 9.8.5.

5.6.6.0.3 L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured

The UE shall be capable of performing L1-SINR measurements with the CSI-RS resource configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to CSI-RS resource configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as CSI-RS resource configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ is defined in Table 9.8.4.3-2 for FR2, where

For the value of M,

- M=1 shall be applied if
  - aperiodic NZP-CSI-RS as CMR or dedicated IMR, or
  - aperiodic CSI-IMR as dedicated IMR, or
  - periodic and semi-persistent NZP-CSI-RS as CMR or dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured, or
  - periodic and semi-persistent CSI-IM as dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured;

- M=3 otherwise.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured for all resources in the resource set.

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- The value of P_{CMR} and P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2, in which the occasions and period of the CSI-RS for CMR and NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead respectively.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS as IMR, the requirement shall apply only if CSI-RS resources as CMR and IMR are configured with the same repetition field and the number of CSI-RS resources in the resource sets for CMR and IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-IM as IMR, the requirement shall apply only if the number of CSI-RS resources in the resource set for CMR and the number of CSI-IM resources in the resource set for IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if CSI-RS occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap.

Table 9.8.4.3-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{CSI\text{-}RS})$

DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},T_{CSI-RS}))
DRX cycle > 320ms	ceil(M*P*N)*T_{DRX}
Note 1: T_{CSI-RS} is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	
Note 3: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to CSI-RS configured for channel measurement, with the same periodicity.	

The UE shall send L1-SINR reports only for report configurations configured for the active BWP.

The UE shall report the L1-SINR value as a 7-bit value in the range [-23, 40] dB with 0.5dB step size if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-SINR based reporting. The differential L1-SINR is quantized to a 4-bit value with 1dB step size. The mapping between the reported L1-SINR value and the measured quantity is described in 10.1.16.

Reported L1-SINR measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-SINR reports shall meet the requirements in clauses 10.1.27 for FR1 and 10.1.28 for FR2, respectively.

The UE shall only send aperiodic L1-SINR measurement reports, if a DCI for triggering report has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-SINR reporting on PUSCH over the air interface at the time specified according to clause 5.2.1.4 in TS 38.214 [26].

For both FR1 and FR2, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to receive CSI-RS for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR2, when the CSI-RS configured for L1-SINR measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and SSB. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS configured for L1-SINR measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and the other CSI-RS. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.
  - The CSI-RS for L1-SINR measurement or the other CSI-RS in a resource set configured with repetition ON, or
  - The CSI-RS or the other CSI-RS is configured as dedicated IMR for L1-SINR computation with SSB as CMR, or
  - The other CSI-RS is configured in q1 and beam failure is detected, or
  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS configured for L1-SINR measurement without any restriction.

For both FR1 and FR2, when the CSI-IM configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to measure CSI-IM for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR2, when the CSI-IM configured for L1-SINR measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected,

UE is required to measure one of but not both CSI-IM for L1-SINR measurement and SSB. Longer measurement period for L1-SINR measurement is expected, and no requirements are defined.

For FR2, when the CSI-IM configured for L1-SINR measurement on one CC is in the same OFDM symbol as the CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-IM for L1-SINR measurement and CSI-RS. Longer measurement period for L1-SINR measurement is expected, and no requirements are defined.
  - The CSI-RS in a resource set configured with repetition ON, or
  - The CSI-IM or the CSI-RS is configured as dedicated IMR for L1-SINR computation with SSB as CMR, or
  - The CSI-RS is configured in q1 and beam failure is detected, or
  - The CMR for L1-SINR measurement and the CSI-RS are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-IM configured for L1-SINR measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clause 9.8.3, 9.8.4.3 and 9.8.5.

5.6.6.1 EN-DC FR2 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- Normal conditions

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test case is incomplete for extreme conditions

5.6.6.1.1 Test purpose

To verify that the UE makes correct reporting of L1-SINR measurement within L1-SINR measurement requirements in TS 38.133 [6] clause 9.8.4.1.

5.6.6.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR2 and long DRX cycle and L1-SINR measurement.

5.6.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.6.1.

5.6.6.1.4 Test description

5.6.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.6.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 5.6.6.1.4.1-2. Test environment parameters are given in Table 5.6.6.1.4.1-3.

Table 5.6.6.1.4.1-1: Applicable NR configurations for FR2 CSI-RS based L1-SINR test

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 5.6.6.1.4.1-2: General test parameters for FR2 CSI-RS based L1-SINR test

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		aperiodic
reportQuantity-r16	1~2		cri-SINR-r16
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~2		26
Propagation condition	1~2		AWGN
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 5.6.6.1.4.1-3: Test Environment parameters for FR2 CSI-RS based L1-SINR test

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.6.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.6.6.1.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

5.6.6.1.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. UE is also configured to measure L1-SINR based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in Table 5.6.6.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On,* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.6.1.5-1. T1 starts.

3. After 480ms from the start of the test the SS transmits the DCI trigger in slot 8.

4. The SS shall check following requirements:

   - R1: the UE shall send L1-SINR report at slot 26 from the reception of DCI trigger. If the report is received at slot 26 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the L1-SINR value of CSI-RS#1 reported by the UE is compared to the expected L1-SINR value for CSI-RS#1. If the resulting value is outside the limits in Table 5.6.6.1.5-2 or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   -R3: The DIFF SINR value of CSI-RS#0 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 5.6.6.1.5-3 or the UE fails to report the measurement value for CSI-RS 0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

5. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

6. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

7 If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.6.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.6.1.4.3-1: Common Exception messages for EN-DC FR2 CSI-based CMR and no dedicated IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions APERIODIC and CSI-SINR Table H.3.6A-2 with conditions CSI-RS and APERIODIC Table H.3.4-1 Table H.3.7-1 with condition DRX.3

Table 5.6.6.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

5.6.6.1.5 Test requirement

Table 5.6.6.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.6.1.5-1: CSI-RS specific test parameters for EN-DC FR2 CSI-based CMR and no dedicated IMR L1-SINR measurement

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.9.1	
Beam assumption Note 3	1~2		Rough	
N_{oc} Note1	1~2	dBm/15kHz	-105	
N_{oc} Note1	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9
CSI-RS RSRP Note2	1~2	dBm/SSB SCS	-95.97	-86.97
Io Note2	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	9

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

After 480ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1. Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 5.6.6.1.5-2 and the corresponding relative accuracy requirements in Table 5.6.6.1.5-3.

Table 5.6.6.1.5-2: L1-SINR absolute accuracy requirements for the reported values R2

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	51
Highest reported value (CSI-RS #1)	74

Table 5.6.6.1.5-3: L1-SINR relative accuracy requirements for the reported values R3

Normal Conditions	T1
Lowest DIFF SINR reported (CSI-RS #0)	4
Highest DIFF SINR reported (CSI-RS #0)	13

The rate of correct events observed during repeated tests (R1 to R3) shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

5.6.6.2 EN-DC FR2 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test case is incomplete for extreme conditions

5.6.6.2.1 Test purpose

To verify that the UE makes correct reporting of L1-SINR measurement in non-DRX within L1-SINR measurement requirements in TS 38.133 [6] clause 9.8.4.2.

5.6.6.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR2 and L1-SINR measurement reporting.

5.6.6.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.6.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.6.2.

5.6.6.2.4 Test description

5.6.6.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.6.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 5.6.6.2.4.1-2. Test environment parameters are given in Table 5.6.6.2.4.1-3.

Table 5.6.6.2.4.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 5.6.6.2.4.1-2: General test parameters for FR2 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD Configuration	1~4		TDDConf.3.1
$BW_{channel}$	1~4	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~4		SR.3.1 TDD
RMSI CORESET Reference Channel	1~4		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~4		CCR.3.1 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
CSI-RS configuration	1~4		CSI-RS.3.1A TDD
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~4		SMTC.1
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
DRX configuration	1~4		off
reportConfigType	1~4		periodic
reportQuantity-r16	1~4		ssb-Index-SINR-r16
Number of reported RS	1~4		2
L1-SINR reporting period	1~4	slot	640
T1	1~4	s	5
T2	1~4	s	3
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 5.6.6.2.4.1-3: Test Environment parameters for FR2 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.6.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.6.6.2.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

5.6.6.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above Table 5.6.6.2.4.1-2. Before the test, UE is configured to perform RLM, BFD and L1-SINR measurement based on the SSBs, and UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-RS resources as IMR.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 5.6.6.2.4.1-2.

2. Set the parameters according to T1 in Table 5.6.6.2.5-1. T1 starts.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 640 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 5.6.6.2.5-1. T2 starts.

5. The UE shall start sending valid L1-SINR reports. The SS shall check the following requirements:

   - R1: the UE shall start to transmit valid L1-SINR reports no later than 2960ms for UE supporting power class 1 in configuration 1 and 2, no later than 2920 ms for UE supporting power class 1 in configuration 3 and 4, no later than 2000 ms for UE supporting power class other than 1 in configuration 1 and 2, no later than 1960 ms for UE supporting power class other than 1 in configuration 3 and 4 from the beginning of time period T2. A valid report shall meet the absolute L1-SINR requirement for SSB#1 in Table 5.6.6.2.5-3 for test configurations 1 and 2 and the corresponding absolute accuracy requirements in Table 5.6.6.2.5-4 for test configurations 3 and 4. If the first valid report is received before the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the UE shall transmit L1-SINR reports every 640 slots. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   - R3: The L1-SINR value of SSB#1 reported by the UE is compared to the expected L1-SINR value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding absolute accuracy requirements in Table 5.6.6.2.5-3 for all test configurations, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

- R4: The DIFF-SINR value of SSB#0 reported by the UE is compared to the expected DIFF-SINR value. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding relative accuracy requirements in Table 5.6.6.2.5-4 for all test configurations, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

8. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

9. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.6.6.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.6.2.4.3-1: Common Exception messages for FR2 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and SS-SINR and CSI-RS_IMR Table H.3.6A-2 with conditions SSB and PERIODIC Table H.3.6A-3 with conditions PERIODIC Table H.3.4-1

Table 5.6.6.2.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

5.6.6.2.5 Test requirement

Table 5.6.6.2.5-1 and Table 5.6.6.2.5-1 define the primary level settings including test tolerances for all tests.

Table 5.6.6.2.5-1: SSB specific test parameters for FR2 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.9.1			
Beam assumption Note 4			Rough			
N_{oc} Note2	1~4	dBm/15kHz	-105			
N_{oc} Note2	1,2	dBm/SSB SCS	-96			
	3,4		-93			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	9
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.5	-94.5	-Infinity	-87
	3,4		-91.5	-91.5	-Infinity	-84
Io Note3	1,2	dBm/95.04MHz	-63.2	-63.2	-67	-57.5
	3,4		-63.2	-63.2	-67	-57.5
$\hat{E}_s / N_{oc}$	1~4	dB	1.5	1.5	-Infinity	9

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 5.6.6.2.5-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0		CSI-RS#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.9.1			
Beam assumption Note 4			Rough			
N_{oc} Note2	1~4	dBm/15kHz	-105			
N_{oc} Note2	1~4	dBm/CSI-RS SCS	-96			
$\hat{E}_s / I_{ot}$	1~4	dB	1.5	1.5	-Infinity	9
$\hat{E}_s / N_{oc}$	1~4	dB	1.5	1.5	-Infinity	9
CSI-RS RSRP Note3	1~4	dBm/ CSI-RS SCS	-94.5	-94.5	-Infinity	-87
Io Note3	1~4	dBm/95.04MHz	-63.2	-63.2	-67	-57.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall send L1-SINR report every 640 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-SINR report including the results for both SSB#0+CSI-RS#0 and SSB#1+CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.28.2, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2, 3 or 4.

Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 5.6.6.2.5-3 for all test configurations and the corresponding relative accuracy requirements in Table 5.6.6.2.5-4 for all test configurations.

Table 5.6.6.2.5-3: L1-SINR absolute accuracy requirements for the reported values for all test configurations R1 and R3

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	54
Highest reported value (SSB#1)	-	71

Table 5.6.6.2.5-4: L1-SINR relative accuracy requirements for the reported values for test configurations R1 and R4

	T1	T2
Lowest DIFF SINR reported (SSB#0)	-	4
Highest DIFF SINR reported (SSB#0)	-	10

For the test to pass, the ratio of successful reported valued for each requirement (R1 to R4) shall be at least 90% with a confidence level of 95%. Each requirement is evaluated independently the others.NOTE:
The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

5.6.6.3 EN-DC FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test case is incomplete for extreme conditions

5.6.6.3.1 Test purpose

To verify that the UE makes correct reporting of L1-SINR measurement within L1-SINR measurement requirements in TS 38.133 [6] clause 9.8.4.3.

5.6.6.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR2 and L1-SINR measurement.

5.6.6.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.6.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.6.3.

5.6.6.3.4 Test description

5.6.6.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.6.3.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 5.6.6.3.4.1-2. Test environment parameters are given in Table 5.6.6.3.4.1-3.

Table 5.6.6.3.4.1-1: Applicable NR configurations for EN-DC FR2 CSI-RS based CMR and CSI-IM based IMR L1-SINR measurement

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 5.6.6.3.4.1-2: General test parameters for FR2 L1-SINR test with CMR and dedicated IMR

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
CSI-IM configuration	1~2		CSI-IM.3.2 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		Off
reportConfigType	1~2		aperiodic
reportQuantity-r16	1~2		cri-SINR-r16
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~2		26
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 5.6.6.3.4.1-3: Test Environment parameters for FR2 L1-SINR test with CMR and dedicated IMR

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.6.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.6.6.3.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

5.6.6.3.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. UE is also configured to measure L1-SINR based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in Table 5.6.6.3.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.6.3.5-1. T1 starts.

3. After 480ms from the start of the test the SS transmits the DCI trigger in slot 8.

4. The SS shall check following requirements:

   - R1: the UE shall send L1-SINR report at slot 26 from the reception of DCI trigger. If the report is received at slot 26 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the L1-SINR value of CSI-RS#1 reported by the UE is compared to the expected L1-SINR value for CSI-RS#1. If the resulting value is outside the limits in Table 5.6.6.3.5-2 or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   -R3: The DIFF SINR value of CSI-RS#0 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 5.6.6.3.5-3 or the UE fails to report the

measurement value for CSI-RS 0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

5. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

6. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

7 If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.6.6.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.6.3.4.3-1: Common Exception messages for EN-DC FR2 CSI-RS based CMR and CSI-IM based IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions APERIODIC and CSI-SINR and CSI-IM_IMR Table H.3.6A-2 with conditions CSI-RS and APERIODIC Table H.3.6A-4 with conditions APERIODIC Table H.3.4-1

Table 5.6.6.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

5.6.6.3.5 Test requirement

Table 5.6.6.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.6.3.5-1: CSI-RS specific test parameters for EN-DC FR2 CSI-RS based CMR and CSI-IM based IMR L1-SINR measurement

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.9	
Assumption for UE beams[Note 3]	1~2		Rough	

N_{oc} Note1	1~2	dBm/15kHz	-105	
N_{oc} Note1	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s/I_{ot}$	1~2	dB	0	9
CSI-RS RSRP Note2	1~2	dBm/SSB SCS	-95.97	-86.97
Io Note2	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s/N_{oc}$	1~2	dB	0	9
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

After 480ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-IM#0 as IMR and CSI-RS#1 as CMR + CSI-IM#1 as IMR. Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 5.6.6.3.5-2 and the corresponding relative accuracy requirements in Table 5.6.6.3.5-3. The reported L1-SINR value shall consider the Rx antenna gain in the range of [-10 ~ +20] dB when calculated.

Table 5.6.6.3.5-2: L1-SINR absolute accuracy requirements for the reported values R2

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	53
Highest reported value (CSI-RS #1)	72

Table 5.6.6.3.5-3: L1-SINR relative accuracy requirements for the reported values R3

Normal Conditions	T1
Lowest DIFF SINR reported (CSI-RS #0)	5
Highest DIFF SINR reported (CSI-RS #0)	12

The rate of correct events observed during repeated tests (R1 to R3) shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

5.6.7 CSI-RS based Intra-frequency Measurements

5.6.7.0 Minimum conformance requirements

5.6.7.0.1 Minimum conformance requirements for event-triggered measurement without gap

[TS38.133, clause 9.10.2]

The requirements in clause 9.10.2 apply, provided:

- Only one intra-frequency CSI-RS layer per serving cell is configured, and
- The BW of the CSI-RS on the intra-frequency neighbor cell is within the active BWP of the UE, and

- The associated SSB of the CSI-RS resources being identified or measured are detectable, and the CSI-RS resources configured for CSI-RS based L3 measurements are measurable, and
- The bandwidth of CSI-RS resources of intra-MO is the same as that of the CSI-RS resources configured for the serving cell, and
- All CSI-RS resources on one intra-frequency layer are configured within up to two separate windows where each window is up to 5ms, and
- for the case of single window further provided
- The periodicity of the configured CSI-RS resources is 10ms, 20ms or 40ms- for the case of two separate windows further provided
  - The two windows are either both fully non-overlapped with MG or both partially overlapped with MG
    - The periodicity of the configured CSI-RS resources is 20ms or 40ms
  - The starting point of the first window is the slot boundary of the serving cell, where the corresponding slot contains the configured L3 CSI-RS resource of the serving cell in the servingCellMO with the smallest offset, and
  - The starting point of the second window if configured is determined by an offset of half of the CSI-RS periodicity in slots with regards to the starting point of the first window, and
- Numerology for intra-frequency CSI-RS and data of serving cell are the same.

An intra-frequency cell shall be considered detectable when for each relevant associated SSB:

- SS-RSRP related side conditions given in clauses 10.1.2.1 and 10.1.3.1 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.7.1 and 10.1.8.1 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.12.1 and 10.1.13.1 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.

A CSI-RS resource shall be considered measurable when for each relevant CSI-RS resource:

- CSI-RSRP related side conditions given in clauses 10.1.2.3 and 10.1.3.3 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-RSRQ related side conditions given in clauses 10.1.7.2 and 10.1.8.2 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-SINR related side conditions given in clauses 10.1.12.2 and 10.1.13.2 for FR1 and FR2, respectively, for a corresponding Band,
- CSI_RP and CSI-RS Ês/Iot according to Annex B.2.12 for a corresponding Band.

[TS38.133, clause 9.2.4.3]

Reported RSRP, RSRQ, and RS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify\ intra\ without\ index}$ defined in clause 9.2.5.1 or clause 9.2.6.2. When L3 filtering is used an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ as defined in clause 9.2.5.1 or clause 9.2.6.2. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index}$ or $T_{identify\ intra\ with\ index}$ defined in clause 9.2.5.1 or clause 9.2.6.2 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

[TS38.133, clause 9.2.6.2]

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index.}$ The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})\ ms$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 5.6.7.0.2-1

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 5.6.7.0.2-2

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

$M_{pss/sss_sync_with_gaps}$: For a UE supporting FR2 power class 1, $M_{pss/sss_sync\ with_gaps}$=40. For a UE supporting FR2 power class 2, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting power class 4, $M_{pss/sss_sync\ with_gaps}$ =24

$M_{meas_period_with_gaps}$: For a UE supporting power class 1, $M_{meas_period_with_gaps}$ =40. For a UE supporting power class 2, $M_{meas_period_with_gaps}$ =24. For a UE supporting power class 3, $M_{meas_period_with_gaps}$ =24. For a UE supporting power class 4, $M_{meas_period\ with_gaps}$ =24.

If the higher layer signalling in TS 38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index.}$

If SCG DRX is in use, intrafrequency cell identification requirements specified in Table 5.6.7.0.2-1 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 5.6.7.0.2-1: Time period for PSS/SSS detection (Frequency range FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, $M_{pss/sss_sync_with_gaps}$ x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x $M_{pss/sss_sync_with_gaps}$) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	$M_{pss/sss_sync_with_gaps}$ x max(MGRP, DRX cycle) x $CSSF_{intra}$

[TS38.133, clause 9.10.2.5]

The measurement period for CSI- RS based intra-frequency measurements without gaps is as shown in table 5.6.7.0.2-2.

Additionally, for a given CSI-RS resource, if the associated SS/PBCH block is configured but not detected by the UE, or if CSI-RS is configured with associated SSB but not QCL-ed to the associated SSB, the UE is not required to monitor the corresponding CSI-RS resource.

Table 5.6.7.0.2-2: Measurement period for intrafrequency CSI-RS based measurements without gaps(FR2)

DRX cycle	$T_{CSI\text{-}RS_measurement_period_intra}$
No DRX	max(400ms, ceil($M_{meas_period_w/o_gaps}$ x $K_{p_CSI\text{-}RS}$) x CSI-RS period) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x $M_{meas_period_w/o_gaps}$ x $K_{p_CSI\text{-}RS}$) x max(CSI-RS period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	$M_{meas_period_w/o_gaps}$ x DRX cycle x $CSSF_{intra}$
NOTE 1: The requirements apply assuming CSI-RS configuration with {D=3 with PRBs ≥ 48}. D is frequency domain density for the 1-port CSI-RS for L3 mobility defined in clause 7.4.1 of TS38.211 [6].	

The normative reference for this requirement is TS 38.133 [6] clause 9.10.2, 9.2.4.3, 9.2.6.2, 9.10.2.5.

5.6.7.1 EN-DC event triggered reporting test without gap under non-DRX

Editor's Note: This test case is incomplete for the following configurations:

- TT analysis is missing.
- Test applicability needs to be updated

5.6.7.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event within intra-frequency cell search without gap under non-DRX. This test will partly verify the intra-frequency cell search requirements.

5.6.7.1.2 Test applicability

This test applies to all types of NR UE release 16 forward supporting NR EN-DC and CSI-RS based RSRP and RSRQ measurement.

5.6.7.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.7.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.7.1.

5.6.7.1.4 Test description

5.6.7.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.7.1.4.1-1.

Table 5.6.7.1.4.1-1: supported test configurations

Configuration	Description
5.6.7.1-1	LTE FDD, 120 kHz SSB SCS, 120Khz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
5.6.7.1-2	LTE TDD, 120 kHz SSB SCS, 120Khz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 5.6.7.1.4.1-2.

Table 5.6.7.1.4.1-2: Initial conditions for EN-DC FR2 event-triggered reporting without gap under non-DRX

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	TBD		

1. The test parameters for PSCell and neighbour cell are given in Table 5.6.7.1.4.1-3 below.

2. Message contents are defined in clause 5.6.7.1.4.3.

3. There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and Cell 3 are set according to clause C.1.1 and C.1.2.

Table 5.6.7.1.4.1-3: General test parameters for intra-frequency event triggered reporting for EN-DC with PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1,2	E-UTRAN PCell (Cell 1) PSCell (Cell 2)	
Neighbour cell		1,2	Cell 3	Cell to be identified.
RF Channel Number		1,2	1: Cell 1 2: Cell 2 and Cell 3	One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
SMTC configuration		1,2	SMTC.1	
A3-Offset	dB	1,2	-6	
CP length		1,2	Normal	
Hysteresis	dB	1,2	0	
Time To Trigger	s	1,2	0	
Filter coefficient		1,2	0	L3 filtering is not used
DRX		1,2	OFF	
Time offset between Cell 1 and Cell 2	μs	1,2	3	Synchronous EN-DC
Time offset between Cell 2 and Cell 3	μs	1,2	0.58	The timing of Cell 3 is CP later than the timing of Cell 2
T1	s	1,2	5	
T2	s	1,2	5	

5.6.7.1.4.2 Test procedure

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell.

In the measurement control information a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.1.1.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.1.1.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 3202 ms for UE supporting power class 1, or 2402 ms for UE supporting other power class then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

5.6.7.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.6.7.1.4.3-1: Common Exception messages EN-DC FR2 inter frequency event triggered reporting tests without gap under non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-4 with A3-offset = -6dB Table H.3.1-7 with Condition INTRA-FREQ, CSI-RS MOBILITY Table H.3.1-8 with Condition SSB RLM Table H.3.4-1 Table H.3.4-2 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-2 with conditions PERIODIC and CSI-RSRP

Table 5.6.7.1.4.3-2: MeasObjectNR (Step 3, test procedure)

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO, Synchronous cells and NOT SS-SINR			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
ssbSubcarrierSpacing	SubcarrierSpacing specified in 38.508-1 [14] Table 7.3.1-3a with condition SSB.3 FR2		5.6.1.1-1, 5.6.1.1-2
smtc1	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure CHOICE {			

setup CHOICE {			
longBitmap	11000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000	SSB#0 and SSB#1	
}			
}			
}			
}			
cellsToAddModList SEQUENCE (SIZE (1..maxNrofCellMeas)) OF CellsToAddMod {	1 entry		
CellsToAddMod[1] SEQUENCE {		entry 1	
physCellId	PhysCellId of Cell 3		
cellIndividualOffset SEQUENCE {			
rsrpOffsetSSB	dB16		
rsrqOffsetSSB	Not present		
sinrOffsetSSB	Not present		
rsrpOffsetCSI-RS	Not present		
rsrqOffsetCSI-RS	Not present		
sinrOffsetCSI-RS	Not present		
}			
}			
}			
}			

5.6.7.1.5 Test requirement

Tables 5.6.7.1.4.1-3, 5.6.7.1.5-1 and 5.6.7.1.5-2 define the primary level settings including test tolerances for EN-DC FR2 event triggered reporting test without gap under non-DRX.

Table 5.6.7.1.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1,2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Intial BWP configuration		1,2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1,2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1,2	SSB		SSB	
PDSCH RMC configuration		1,2	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Patterns		1,2	OP.1		OP.1	
TRS configuration		1,2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		1,2	TCI.State.2		N/A	
SMTC configuration		1, 2	SMTC.1		SMTC.1	
SSB configuration		1,2	SSB.3 FR2		SSB.3 FR2	
CSI-RS RRM configuration		1,2	CSI-RS.RRM.FR2.1 TDD		CSI-RS.RRM.FR2.1 TDD	
Propagation Condition		1,2	AWGN			

Table 5.6.7.1.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1,2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Assumption for UE beams Note 4		1,2	Rough		Rough	
$\hat{E}_s/I_{ot}$ for SSB	dB	1,2	4	4	-Infinity	8
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	1,2	4	4	-Infinity	8
N_{oc} Note 2	dBm/15 KHz	1,2	-102			
N_{oc} Note 2	dBm/SCS	1,2	-93			
SS-RSRP	dBm/SCS	1,2	-89	-89	-Infinity	-85
CSI-RSRP	dBm/SCS	1,2	-89	-89	-Infinity	-85
$\hat{E}_s/N_{oc}$ for SSB	dB	1,2	4	4	-Infinity	8
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	1,2	4	4	-Infinity	8
Io	dBm/95.04MHz	1,2	-58.56		-55.38	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2.

3200 for UE supporting power class 1, or

2400 for UE supporting other power class.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured shall be less than a total of 3202 ms in this test case and 2402 ms for other power classes (note: this gives a total measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

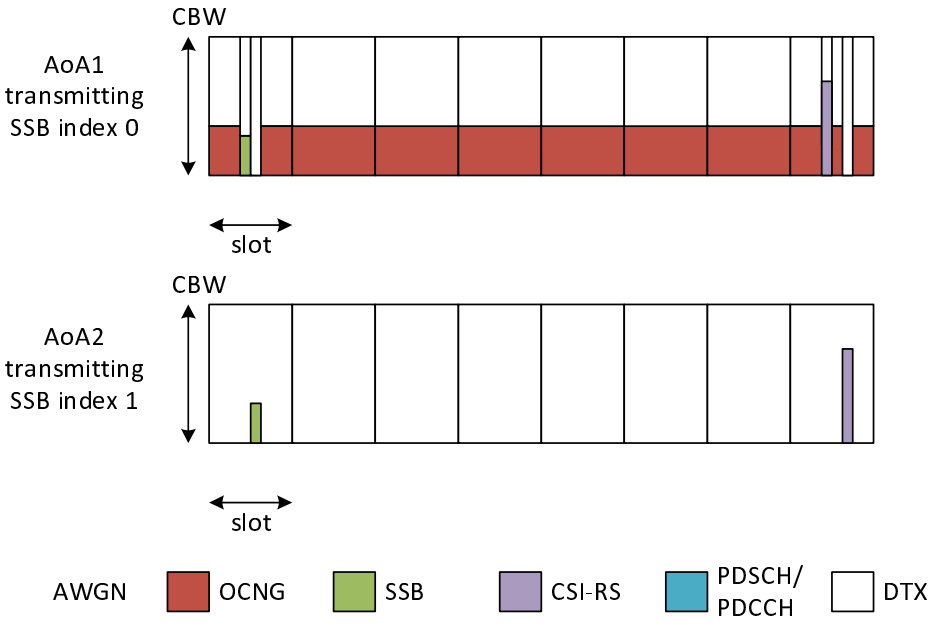

Figure 5.6.7.1.5-1: Time multiplexed downlink transmissions (Config 1,2 example)

5.6.8 CSI-RS based Inter-frequency Measurements

5.6.8.0 Minimum conformance requirements for Inter-frequency measurements

The requirements in clause 9.10.3 apply, provided:

- The associated SSB of the cell being identified or measured is detectable, and
- All CSI-RS resources on one inter-frequency layer are configured within a window of up to 5ms, and
- The periodicity of the configured CSI-RS resources is 10ms, 20ms or 40ms, and
- CSI-RS resources for measurements and the associated SSB for cell identification are configured within measurement gap.

An inter-frequency cell shall be considered detectable when for each relevant associated SSB:

- SS-RSRP related side conditions given in clauses 10.1.4.1 and 10.1.5.1 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.9.1 and 10.1.10.1 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.14.1 and 10.1.15.1 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.3 for a corresponding Band.

A CSI-RS resource shall be considered measurable when for each relevant CSI-RS resource:

- CSI-RSRP related side conditions given in clauses 10.1.4.3 and 10.1.5.3 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-RSRQ related side conditions given in clauses 10.1.9.2 and 10.1.10.2 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-SINR related side conditions given in clauses 10.1.14.2 and 10.1.15.2 for FR1 and FR2, respectively, for a corresponding Band,

- CSI _RP and CSI-RS Ês/Iot according to Annex B.2.13 for a corresponding Band.

When measurement gaps are provided, if configured with the higher layer parameters *CSI-RS-Resource-Mobility* and *associatedSSB*, the UE shall be able to identify a new detectable CSI-RS based inter frequency cell within $T_{CSI-RS_identify_inter}$,

$$T_{CSI-RS_identify_inter} = (T_{PSS/SSS_sync} + T_{CSI-RS_measurement_period_inter} + T_{CSI-RS_SFN_inter})\ ms$$

Where:

T_{PSS/SSS_sync} is the time period used in PSS/SSS detection which is determined according to T_{PSS/SSS_sync_inter} in clause 9.3.4,

$T_{CSI-RS_SFN_inter}$ is the time period used to acquire the SFN information of the cell being measured, which is shown in Table 9.10.3.5-3 for FR1 and equals inter-frequency TSSB_time_index_inter in Clause 9.3.4 for FR2,

$T_{CSI-RS_measurement_period_inter}$: equal to a measurement period of CSI-RS based measurement given in table 9.10.3.5-1 and table 9.10.3.5-2.

$M_{meas_period_inter}$: For a UE supporting FR2 power class 1 or 5, $M_{meas_period_inter}$ =8×N samples. For a UE supporting FR2 power class 2, $M_{meas_period_inter}$=5×N samples. For a UE supporting FR2 power class 3, $M_{meas_period_inter}$ =5×N samples. For a UE supporting FR2 power class 4, $M_{meas_period_inter}$ = 5×N samples. Note that scaling factor N = [8].

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5 for measurement conducted within measurement gaps.

When UE supports concurrent measurement gaps or [*musim-GapPreference-r17]* or both concurrent measurement gap and [*musim-GapPreference-r17]*, and concurrent measurement gaps or periodic MUSIM gaps or both concurrent gaps and periodic MUSIM gaps are configured, K_{p_CSI-RS} is the scaling factor for a CSI-RS frequency layer to be measured within the associated measurement gap which is defined as $K_{p_CSI-RS} = N_{total} / N_{available}$. K_{p_CSI-RS} = 1 for UE not configured with concurrent measurement gaps and MUSIM gaps.

- For a window W of duration max(CSI-RS period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE MG, periodic MUSIM gaps, and per-FR MG within the same FR as the CSI-RS frequency layer, and starting at the beginning of any gap occasions covering the CSI-RS resources.:
  - N_{total} is the total number of associated gap occasions covering CSI-RS resources within the window, including those overlapped with other measurement gap and MUSIM gap instances within the window, and
  - $N_{available}$ is the number of non-dropped associated gap occasions covering CSI-RS resources within the window W, after accounting for MG and MUSIM gap collisions by applying the collision rules for the measurement gap and MUSIM gap in section 9.1.8.3 and 9.1.10.x3, respectively.
  - Requirements do not apply if $N_{available}$ = 0

When UE supports [*musim-GapPreference-r17*] and if the configured aperiodic MUSIM gap collides with the measurement gap associated with the target frequency layer, where MUSIM gap collision rule in section 9.1.10.x3 is applied, longer cell identification period for the target inter-frequency is expected.

Additionally, for a given CSI-RS resource, if the associated SSB is configured but not detected by the UE, or if CSI-RS configured with associated SSB but not QCL-ed to the associated SSB, the UE is not required to monitor the corresponding CSI-RS resource.

Table 5.6.8.0-1: Measurement period for CSI-RS based inter-frequency measurements with gaps (FR2)

Condition NOTE1,2	$T_{CSI-RS_measurement_period_inter}$
No DRX	$Max(400\ ms, ceil(M_{meas_period_inter} \times K_{p_CSI-RS}) \times Max(MGRP, CSI\text{-}RS\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(400\ ms, ceil(1.5 \times M_{meas_period_inter} \times K_{p_CSI-RS}) \times Max(MGRP, CSI\text{-}RS\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(M_{meas_period_inter} \times K_{p_CSI-RS}) \times DRX\ cycle \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

NOTE 2:	In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.
NOTE 3:	If UE support concurrent gaps and multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the CSI-RS resources of the inter-frequency layer.
NOTE 4:	$K_{p_CSI\text{-}RS}$ is applicable for a UE supporting concurrent gaps and/or MUSIM gaps.

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4.2, 10.1.5.2, 10.1.9.2, 10.1.10.2, 10.1.14.2 and 10.1.15.2..

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within CSI-RS based measurement defined in clause . When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clause 9.10.3.2, 9.10.3.4, 9.10.3.5.

5.6.8.1 EN-DC event triggered reporting tests for NR FR2 cell when DRX is used

Editor's Note: This test case is complete for the following configurations:

-- UE power class 3

- Test frequency f < 40.8 GHz

- Normal Condition

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

This test case is incomplete for extreme condition

5.6.8.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

5.6.8.1.2 Test applicability

This test applies to all types of NR UE release 16 forward supporting NR EN-DC FR2 and CSI-RS based measurement and long DRX cycle. Tests 2 are applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306) and Gap Pattern Id 13, otherwise Tests 1 are applicable.

5.6.8.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.6.8.0.

The normative reference for this requirement is TS 38.133 [6] clause A.5.6.8.1.

5.6.8.1.4 Test description

5.6.8.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.6.8.1.4.1-1.

Table 5.6.8.1.4.1-1 EN-DC FR2-FR2 event triggered reporting tests in DRX supported test configurations

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 120 kHz CSI-RS SCS,100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table 5.6.8.1.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39	39	
SMTC-SSB parameters		Config 1,2	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	DRX.1		As specified in clause A.3.3.3
Time offset between PCell and PSCell	μs	Config 1,2	3		Synchronous EN-DC
Time offset between serving and neighbour cells	μs	Config 1,2	0.58		The timing of Cell 3 is CP later than the timing of Cell 2
T1	s	Config 1,2	5		
T2	s	Config 1,2	21 for PC1; 13 for other PC	21 for PC1; 13 for other PC	

Table 5.6.8.1.4.1-3: Test Environment test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA, 7.2.3 for NR FR2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.6.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 5.6.8.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 and Cell 3 are NR FR1 cells in different frequencies. Cell 2 is the PSCell and Cell 3 is the target cell. The power levels and settings for Cell 2 and Cell 3 are set according to clause C.1.2.

3. The UE Rx beam peak direction for Cell 2 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

5.6.8.1.4.2 Test procedure

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2.

In test 1 measurement gap pattern configuration # 0 as defined in Table 5.6.8.1.4.1-2 is provided for UE that does not support per-FR gap and in test 3 measurement gap pattern configuration #13 as defined in Table 5.6.8.1.4.1-2 is provided for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 5.6.8.1.4.1-2. The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction. T1 starts.

3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 5.6.8.1.4.1-2.

6. UE shall transmit a MeasurementReport message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than 20162 ms for UE supporting power class 1, or 12482 ms for UE supporting other power class for Test 1 and Test 3, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receives the MeasurementReport message in step 6 or when T2 expires, the SS shall transmit RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

8. Set Cell 3 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 5.6.8.1.4.1-2 as appropriate.

5.6.8.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ. For Test 1 and Test 3, with condition GAP NEEDED additionally. Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells and CSI-RS MOBILITY Table H.3.1-4 with A3-offset = -6dB Table H.3.1-6 with Conditions gapFR2 and Pattern #13 for Test 1 and Test 3 Table H.3.4-4 with Condition gapUE Test 1 and Test 3 Table H.3.4-5 with Condition Pattern #0 for Test 1 and Test 3 Table H.3.1-7 with Condition INTER-FREQ and CSI-RS MOBILITY Table H.3.7-1 with Condition DRX.1 for Test 1 and Test 3 Table H.3.4-1 Table H.3.4-2 Table H.3.4-3

5.6.8.1.5 Test requirement

Table 5.6.8.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 5.6.8.1.5-1: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 1 as specified in clause A.3.15			
Assumption for UE beams Note 7		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2	10: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW	MHz	Config 1,2	10: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1			
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
TCI configuration		Config 1,2	CSI-RS.Config.0		NA	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
CSI-RS RRM configuration		Config 1,2	CSI-RS.RRM.FR2.1 TDD		CSI-RS.RRM.FR2.1 TDD	
firstOFDMSymbolInTimeDomain		Config 1,2	7		12	
N_{oc} Note2	dBm/15kHz Note5		-104.7		-104.7	

N_{oc} Note2	dBm/SCS Note4	Config 1,2	-95.7		-95.7	
CSI-RSRP Note 3	dBm/SCS Note5	Config 1,2	-89.7	-89.7	-Infinity	-86.7
SS-RSRP Note 3	dBm/SCS Note5	Config 1,2	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$ for SSB	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$ for SSB	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	Config 1,2	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1,2	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP, CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0dBi gain at the center of the quiet zone
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

20160 ms for UE supporting power class 1, or

12480 ms for UE supporting other power class.

The UE is required to read the neighbour cell SSB index in this test in order to detect associated SSB for the CSI-RS resource of Cell 3.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

5.7 Measurement performance requirements

5.7.1 SS-RSRP

5.7.1.0 Minimum conformance requirements

5.7.1.0.1 Intra-frequency SS-RSRP measurement accuracy requirements

5.7.1.0.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 5.7.1.0.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.1.0.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range			
			Minimum Io			Maximum Io
			dBm / SCS_{SSB} Note 1			
dB	dB	dB	SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
±6	±9	≥-6	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±8	±11		N/A		-70	-50
NOTE 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

5.7.1.0.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell in FR2.

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.1.0.1.2-1: SS-RSRP Intra frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 2] range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} [Note 1]		dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±6	±9	≥-6	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50

NOTE 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
NOTE 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
NOTE 4: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.3.1 and 10.1.6.

5.7.1.0.2 Inter-frequency SS-RSRP measurement accuracy requirements

5.7.1.0.2.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR2 that is on a different frequency than the serving cell.

The accuracy requirements in Table 5.7.1.0.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [2].

Table 5.7.1.0.2.1-1: SS-RSRP Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 2] range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} [Note 1]		dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±6	±9	≥-4	Same value as SSB_RP in Table B.2.3-2, according to UE Power class, operating band and angle of arrival	N/A	-70
±8	±11		N/A	-70	-50

NOTE 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
NOTE 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.

NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.5.1 and 10.1.6.

5.7.1.0.2.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell on a frequency in FR2 compared to the SS-RSRP measured from another cell on another frequency in FR2.

The accuracy requirements in Table 5.7.1.0.2.2-1 are valid under the following conditions:

- Conditions defined in 38.101-2 [3] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27dB$
- $|$ Channel 1_Io -Channel 2_Io $| \leq 20$ dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.1.0.2.2-1: SS-RSRP Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1		dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±6	±9	≥-4	Same value as SSB_RP in Table B.2.3-2, according to UE Power class, operating band and angle of arrival		-50

NOTE 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
NOTE 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
NOTE 4: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.5.1 and 10.1.6.

5.7.1.1 EN-DC FR2 SS-RSRP measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC1, PC3
- Normal conditions

- The test is incomplete for UE power classes other than PC1 and PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test is incomplete for extreme conditions

5.7.1.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP measurement accuracy for NR FR2 is within the specified limits for all bands.

5.7.1.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

5.7.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.1.1.

5.7.1.1.4 Test description

Three cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell, Cell 2 is the NR FR2 PSCell and Cell 3 is the NR FR2 neighbour cell on the same frequency as the PSCell.

5.7.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.1.1.4.1-1.

Table 5.7.1.1.4.1-1: Supported test configurations

Configuration	Description
5.7.1.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
5.7.1.1-2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.7.1.1.4.1-2.

Table 5.7.1.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 5.7.1.1.4.3.

2. There are two carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier, Cell 2 is the NR PSCell on the NR FR2 carrier and Cell 3 is the neighbour cell on the same NR FR2 carrier. Cell 3 is the target for the SS-RSRP measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.1.1.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 5.7.1.1.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport for the following requirements:

   - R1: The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP for Cell 2. If the value is outside the limits in Table 5.7.1.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

   - R2: The SS-RSRP value of Cell 3 reported by the UE is compared to the expected SS-RSRP for Cell 3. If the value is outside the limits in Table 5.7.1.1.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   - R3: The SS-RSRP value of Cell 3 reported by the UE is compared to the reported SS-RSRP of Cell 2. If the resulting value is outside the limits in Table 5.7.1.1.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G for each of the requirements is achieved. The evaluation of a specific requirement is concluded when the confidence level for that requirement is reached, even if more measurement reports are required for the remaining requirements.

7a The SS shall check all the SS-RSRP reported values during Test 1 for the following requirements:

   - R9: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 2 reported by the UE. If the difference exceeds the limits in Table 5.7.1.1.5-3a count a fail for R9. Otherwise, R9 is passed.

   - R10: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 3 reported by the UE. If the difference exceeds the limits in Table 5.7.1.1.5-3a count a fail for R10. Otherwise, R10 is passed.

8. Set the parameters according to Test 2 in Table 5.7.1.1.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements:

   - R4: The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP for Cell 2. If the value is outside the limits in Table 5.7.1.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

   - R5: The SS-RSRP value of Cell 3 reported by the UE is compared to the expected SS-RSRP for Cell 3. If the value is outside the limits in Table 5.7.1.1.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R5 is increased by one. Otherwise, the number of passed iterations for R5 is increased by one.

   - R6: The SS-RSRP value of Cell 3 reported by the UE is compared to the reported SS-RSRP of Cell 2. If the resulting value is outside the limits in Table 5.7.1.1.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed iterations for R6 is increased by one. Otherwise, the number of passed iterations for R6 is increased by one.

- R7: The SS-RSRP value of Cell 2 reported by the UE during Test 2 is compared to the reported SS-RSRP of Cell 2 during Test 1 for the same iteration. If the resulting value is outside the limits in Table 5.7.1.1.5-5 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R7 is increased by one. Otherwise, the number of passed iterations for R7 is increased by one

- R8: The SS-RSRP value of Cell 3 reported by the UE during Test 2 is compared to the reported SS-RSRP of Cell 3 during Test 1 for the same iteration. If the resulting value is outside the limits in Table 5.7.1.1.5-5 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R8 is increased by one. Otherwise, the number of passed iterations for R8 is increased by one

8a The SS shall check all the SS-RSRP reported values during Test 2 for the following requirements:

- R11: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 2 reported by the UE. If the difference exceeds the limits in Table 5.7.1.1.5-3a count a fail for R11. Otherwise, R11 is passed.

- R12: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 3 reported by the UE. If the difference exceeds the limits in Table 5.7.1.1.5-3a count a fail for R12. Otherwise, R12 is passed.

9. If more measurement reports with Test 1 configuration are needed in order to complete the evaluation R7 or R8, the SS shall set the parameters according to Table 5.7.1.1.5-2 as appropriate and repeat steps 5 to 8, evaluating R7 and / or R8 as appropriate.

5.7.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition Synchronous cells Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.1.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

5.7.1.1.5 Test requirement

Table 5.7.1.1.5-1 defines the cell specific settings for all tests. Table 5.7.1.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clause 5.7.1.0.1.1 and relative accuracy requirements in clause 5.7.1.0.1.2. The following eight requirements are to be verified:

During T1:

R1: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table 5.7.1.1.5-3.

R2: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table 5.7.1.1.5-3.

R3: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 5.7.1.1.5-4.

R9: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 5.7.1.1.5-3a.

R10: Δ(Max-Min) accuracy of Cell 3. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 5.7.1.1.5-3a.

During T2:

R4: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table 5.7.1.1.5-3 and Table 5.7.1.1.5-3a.

R5: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table 5.7.1.1.5-3 and Table 5.7.1.1.5-3a.

R6: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 5.7.1.1.5-4.

R11: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 5.7.1.1.5-3a.

R12: Δ(Max-Min) accuracy of Cell 3. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 5.7.1.1.5-3a.

During T1 and T2:

R7: Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 5.7.1.1.5-5.

R8: Relative accuracy of Cell 3 during T2 compared with Cell 3 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 5.7.1.1.5-5.

Table 5.7.1.1.5-1: SS-RSRP Intra frequency general test parameters

Parameter[Note 5]	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID		**489**	**0**	**489**	**0**
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		24		24	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-

Parameter[Note 5]	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.2 TDD	-	SR.3.2 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 2	µs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS[Note 1]					
EPRE ratio of OCNG to OCNG DMRS[Note 1]					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Void
NOTE 3: Void
NOTE 4: Void
NOTE 5: All parameters apply for configuration 1 and 2
NOTE 6: Void

Table 5.7.1.1.5-2: SS-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1			
Assumption for UE beams[Note 8]		Rough			
N_{oc} [Note1]	dBm/15kHz [Note4]	-97.4		N/A	
N_{oc} [Note1]	dBm/SCS[Note4]	-88.37		N/A	
$\hat{E}_s / N_{oc}$	dB	6.0	1.4	N/A	N/A
E_s PC1	dBm/SCS[Note4]			(Table B.2.2-2 Rx Beam Peak +8.1dB)	(Table B.2.2-2 Rx Beam Peak +8.1dB)
E_s PC3	dBm/SCS[Note4]			(Table B.2.2-2 Rx	(Table B.2.2-2 Rx

Parameter	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
				Beam Peak +9.8dB)	Beam Peak +9.8dB)
SSB_RP Note2 PC1	dBm/SCS	-82.37	-86.97	(Table B.2.2-2 Rx Beam Peak +8.1dB)	(Table B.2.2-2 Rx Beam Peak +8.1dB)
SSB_RP Note2 PC3	dBm/SCS	-82.37	-86.97	(Table B.2.2-2 Rx Beam Peak +9.8dB)	(Table B.2.2-2 Rx Beam Peak +9.8dB)
$\hat{E}_s/I_{ot\ BB}$ Note6	dB	2.20	-5.59	-1.77	-1.77
Io Note2	dBm/95.04 MHz Note4	-55.74		(Table B.2.2-2 Rx Beam Peak +37.40dB)	

NOTE 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: Void
NOTE 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
NOTE 5: Void
NOTE 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [3] Table 6.2.1.3-4.
NOTE 7: All parameters apply for configurations 1 and 2
NOTE 8: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 5.7.1.1.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5

UE power class 1			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	60	n257, n258, n261	41
		n260	44
		n259	FFS
Highest reported value (Cell 2)	126	n257, n258, n261	118
		n260	121
		n259	FFS
Lowest reported value (Cell 3)	56	n257, n258, n261	41
		n260	44
		n259	FFS
Highest reported value (Cell 3)	126	n257, n258, n261	118
		n260	121
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	57+ FFS	n257, n258, n261	38 + FFS
		n260	41 + FFS
		n259	FFS
Highest reported value (Cell 2)	126+ FFS	n257, n258, n261	121 + FFS
		n260	124 + FFS
		n259	FFS
Lowest reported value (Cell 3)	53+ FFS	n257, n258, n261	38+ FFS
		n260	41+ FFS

		n259	FFS
Highest reported value (Cell 3)	126+ FFS	n257, n258, n261	121+ FFS
		n260	125+ FFS
		n259	FFS
UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	50	n257, n258, n261	31
		n260	33
		n259	FFS
Highest reported value (Cell 2)	108	n257, n258, n261	88
		n260	90
		n259	FFS
Lowest reported value (Cell 3)	46	n257, n258, n261	31
		n260	33
		n259	FFS
Highest reported value (Cell 3)	103	n257, n258, n261	88
		n260	90
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	47+ FFS	n257, n258, n261	28 + FFS
		n260	30 + FFS
		n259	FFS
Highest reported value (Cell 2)	111+ FFS	n257, n258, n261	91 + FFS
		n260	93 + FFS
		n259	FFS
Lowest reported value (Cell 3)	46+ FFS	n257, n258, n261	28+ FFS
		n260	30+ FFS
		n259	FFS
Highest reported value (Cell 3)	106+ FFS	n257, n258, n261	91+ FFS
		n260	93+ FFS
		n259	FFS

Table 5.7.1.1.5-3a: evaluation limits for the Δ(Max-Min) reported values for each cell during each time period

UE power class 1		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 2	16	16
Δ(Max-Min) reported value Cell 3	16	16
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 2	16 + FFS	16+ FFS
Δ(Max-Min) reported value Cell 3	16 + FFS	16 + FFS
UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 2	16	16
Δ(Max-Min) reported value Cell 3	16	16
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 2	16 + FFS	16+ FFS
Δ(Max-Min) reported value Cell 3	16 + FFS	16 + FFS

Table 5.7.1.1.5-4: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 1		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 3 – Cell 2)	RSRP_x - 12	RSRP_x - 6
Highest reported value (Cell 3 – Cell 2)	RSRP_x + 2	RSRP_x + 6
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 3 – Cell 2)	RSRP_x - 15+ FFS	RSRP_x - 9+ FFS
Highest reported value (Cell 3 – Cell 2)	RSRP_x + 5+ FFS	RSRP_x + 9+ FFS
UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 3 – Cell 2)	RSRP_x - 12	RSRP_x - 6
Highest reported value (Cell 3 – Cell 2)	RSRP_x + 2	RSRP_x + 6
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 3 – Cell 2)	RSRP_x - 15+ FFS	RSRP_x - 9+ FFS
Highest reported value (Cell 3 – Cell 2)	RSRP_x + 5+ FFS	RSRP_x + 9+ FFS
RSRP_x is the reported value of Cell 2		

Table 5.7.1.1.5-5: evaluation limits for the reported values for T2 with respect to T1 relative accuracy rules R7, R8

UE power class 1			
Test 2	**Bands**	**Normal Conditions**	**Extreme Conditions**
Lowest reported value (Cell 2 T2 – Cell 2 T1)	n257, n258, n261	RSRP_x - 28	RSRP_x - 31+ FFS
	n260	RSRP_x - 25	RSRP_x - 28+ FFS
	n259	FFS	FFS
Highest reported value (Cell 2 T2 – Cell 2 T1)	n257, n258, n261	RSRP_x - 12	RSRP_x - 9+ FFS
	n260	RSRP_x - 9	RSRP_x - 6+ FFS
	n259	FFS	FFS
Lowest reported value (Cell 3 T2 – Cell 3 T1)	n257, n258, n261	RSRP_y - 24	RSRP_y - 27+ FFS
	n260	RSRP_y - 21	RSRP_y - 24+ FFS
	n259	FFS	FFS
Highest reported value (Cell 3 T2 – Cell 3 T1)	n257, n258, n261	RSRP_y - 8	RSRP_y - 5+ FFS
	n260	RSRP_y - 5	RSRP_y - 2+ FFS
	n259	FFS	FFS
UE power class 3			
Test 2	**Bands**	**Normal Conditions**	**Extreme Conditions**
Lowest reported value (Cell 2 T2 – Cell 2 T1)	n257, n258, n261	RSRP_x - 28	RSRP_x - 31+ FFS
	n260	RSRP_x - 26	RSRP_x - 29+ FFS
	n259	FFS	FFS
Highest reported value (Cell 2 T2 – Cell 2 T1)	n257, n258, n261	RSRP_x - 12	RSRP_x - 9+ FFS
	n260	RSRP_x - 10	RSRP_x - 7+ FFS
	n259	FFS	FFS
Lowest reported value (Cell 3 T2 – Cell 3 T1)	n257, n258, n261	RSRP_y - 24	RSRP_y - 27+ FFS
	n260	RSRP_y - 21	RSRP_y - 24+ FFS
	n259	FFS	FFS
Highest reported value (Cell 3 T2 – Cell 3 T1)	n257, n258, n261	RSRP_y - 8	RSRP_y - 5+ FFS
	n260	RSRP_y - 5	RSRP_y - 2+ FFS
	n259	FFS	FFS
RSRP_x is the reported value of Cell 2 during T1 RSRP_y is the reported value of Cell 3 during T1			

For the test to pass, the ratio of successful reported values for each requirement (R1 to R8) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.1.2 EN-DC FR2-FR2 SS-RSRP measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

5.7.1.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP measurement accuracy for NR FR2 is within the specified limits for all bands.

5.7.1.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

5.7.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.1.2.

5.7.1.2.4 Test description

Three cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell, Cell 2 is the NR FR2 PSCell and Cell 3 is the NR FR2 neighbour cell on a different NR FR2 frequency.

5.7.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.1.2.4.1-1.

Table 5.7.1.2.4.1-1: Supported test configurations

Configuration	Description
5.7.1.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
5.7.1.2-2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD
5.7.1.2-3	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
5.7.1.2-4	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.7.1.2.4.1-2.

Table 5.7.1.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1

Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 5.7.1.2.4.1-3.
2. Message contents are defined in clause 5.7.1.2.4.3.
3. There are three carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier, Cell 2 is the NR PSCell on one of the NR FR2 carriers and Cell 3 is the neighbour cell on the other NR FR2 carrier. Cell 3 is the target for the SS-RSRP measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.
4. The rx beam peak and directions in which the UE meets the EIS spherical coverage criteria have been found with one of the procedures from Annex I.

5.7.1.2.4.2 Test procedure

1. Configure the positioning system for a valid test point as defined in A.9.4. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 5.7.1.2.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport for the following requirements:

   - R1: The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP for Cell 2. If the value is outside the limits in Table 5.7.1.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed samples for R1 is increased by one. Otherwise, the number of passed samples for R1 is increased by one.

   - R2: The SS-RSRP value of Cell 3 reported by the UE is compared to the expected SS-RSRP for Cell 3. If the value is outside the limits in Table 5.7.1.2.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed samples for R2 is increased by one. Otherwise, the number of passed samples for R2 is increased by one.

   - R3: The SS-RSRP value of Cell 3 reported by the UE is compared to the reported SS-RSRP of Cell 2. If the resulting value is outside the limits in Table 5.7.1.2.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed samples for R3 is increased by one. Otherwise, the number of passed samples for R3 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G for each of the requirements is achieved. The evaluation of a specific requirement is concluded when the confidence level for that requirement is reached, even if more measurement reports are required for the remaining requirements.

7a. The SS shall check all the SS-RSRP reported values during Test 1 for the following requirements:

   - R7: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 2 reported by the UE. If the difference exceeds the limits in Table 5.7.1.2.5-3a count a fail for R7. Otherwise, R7 is passed.

   - R8: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 3 reported by the UE. If the difference exceeds the limits in Table 5.7.1.2.5-3a count a fail for R8. Otherwise, R8 is passed.

8. The SS shall select a new test point as defined in A.9.4 and rotate the positioning system for the selected test point.

9. Set the parameters according to Test 2 in Table 5.7.2.1.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements:

   - R4: The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP for Cell 2. If the value is outside the limits in Table 5.7.2.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed samples for R4 is increased by one. Otherwise, the number of passed samples for R4 is increased by one.

   - R5: The SS-RSRP value of Cell 3 reported by the UE is compared to the expected SS-RSRP for Cell 3. If the value is outside the limits in Table 5.7.2.1.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed samples for R5 is increased by one. Otherwise, the number of passed samples for R5 is increased by one.

   - R6: The SS-RSRP value of Cell 3 reported by the UE is compared to the reported SS-RSRP of Cell 2. If the resulting value is outside the limits in Table 5.7.2.1.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed samples for R6 is increased by one. Otherwise, the number of passed samples for R6 is increased by one.

10. The SS shall check all the SS-RSRP reported values during Test 1 for the following requirements:

    - R9: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 2 reported by the UE. If the difference exceeds the limits in Table 5.7.1.2.5-3a count a fail for R9. Otherwise, R9 is passed.

    - R10: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 3 reported by the UE. If the difference exceeds the limits in Table 5.7.1.2.5-3a count a fail for R10. Otherwise, R10 is passed.

5.7.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, Synchronous cells Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.1.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

5.7.1.2.5 Test requirement

Table 5.7.1.2.5-1 defines the cell specific settings for all tests. Table 5.7.1.2.5-2 defines the OTA primary level settings including test tolerances for all tests.

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clause 5.7.1.0.2.1 and relative accuracy requirements in clause 5.7.1.0.2.2. The following eight requirements are to be verified:

During T1:

R1: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table 5.7.1.2.5-3 for test configuration 1 and in Table 5.7.1.2.5-4 for test configuration 2.

R2: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table 5.7.1.2.5-3 for test configuration 1 and in Table 5.7.1.2.5-4 for test configuration 2 and Table 5.7.1.2.5-3a for both configurations.

R3: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 5.7.1.2.5-5.

R7: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 5.7.1.2.5-3a.

R8: Δ(Max-Min) accuracy of Cell 3. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 5.7.1.2.5-3a.During T2:

R4: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table 5.7.1.2.5-3 for test configuration 1 and in Table 5.7.1.2.5-4 for test configuration 2.

R5: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table 5.7.1.2.5-3 for test configuration 1 and in Table 5.7.1.2.5-4 for test configuration 2 and Table 5.7.1.2.5-3a for both configurations.

R6: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 5.7.1.2.5-5.

R9: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 5.7.1.2.5-3a.

R10: Δ(Max-Min) accuracy of Cell 3. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 5.7.1.2.5-3a.

Table 5.7.1.2.5-1: SS-RSRP Inter frequency general test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1~4		freq1	freq2	freq1	freq2
$BW_{channel}$	1~4		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated	1,2		24		24	
	3,4		48		48	
Duplex mode	1~4		TDD		TDD	
TDD configuration	1~4		TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel	1,2		SR.3. 2 TDD	-	SR.3. 2 TDD	-
	3,4		SR.3.3 TDD		SR.3.3 TDD	
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD	-	CR.3.1 TDD	-
	3,4		CR.3.2 TDD		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD	-	CCR.3.1 TDD	-
	3,4		CCR.3.7 TDD		CCR.3.7 TDD	
SSB configuration	1,2		SSB.3 FR2		SSB.3 FR2	
	3,4		SSB.4 FR2		SSB.4 FR2	
PDSCH/PDCCH subcarrier spacing	1~4	kHz	120		120	
OCNG Patterns	1~4		OP.3		OP.3	
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~4		DLBWP.1.3		DLBWP.1.3	

			ULBWP.1.3		ULBWP.1.3	
TRS Configuration	1~4		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2		TCI.State.2	
SMTC configuration	1~4		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 3	1~4	µs	3		3	
EPRE ratio of PSS to SSS	1~4	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition	1~4	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration	1~4	-	1x2	1x2	1x2	1x2
NOTE 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Void						

Table 5.7.1.2.5-2: SS-RSRP Inter frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration	1~4		Setup 4b according to clause A.9.4		Setup 4b according to clause A.9.4	
			AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams Note 7	1~4		Rough		Rough	
N_{oc} Note1	1, 2	dBm/15kHz Note4	-96.3	-96.3	(Table B.2.3-2 Rx Beam Peak Note 8 - 4.63dB)	(Table B.2.3-2 Rx Beam Peak Note 8 - 3.03dB)
	3, 4		-99.3	-99.3		
N_{oc} Note1	1, 2	dBm/SCS Note4	-87.3	-87.3	(Table B.2.3-2 Rx Beam Peak Note 8 +4.4dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +6.0dB)
	3, 4		-87.3	-87.3	(Table B.2.3-2 Rx Beam Peak Note 8 +7.4dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +9.0dB)
$\hat{E}_s / N_{oc}$	1~4	dB	6.0	6.0	17.0	1.0
SSB_RP Note2	1, 2	dBm/SCS	-81.3	-81.3	(Table B.2.3-2 Rx Beam Peak Note 8 +21.4dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +7.0dB)
	3, 4		-81.3	-81.3	(Table B.2.3-2 Rx Beam Peak Note 8 +24.4dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +10.0dB)
($SSB_RP_{Cell\ 2}$ – $SSB_RP_{Cell\ 3}$)	1~4	dB	0		14.40	
$\hat{E}_s / I_{ot\ BB}$ Note6	1, 2	dB	5.23	5.93	5.38	-1.46
	3, 4		4. 58	5.87		

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
Io^{Note2}	1, 2	dBm/95.04 MHz Note4	-55.70	-55.70	(Table B.2.3-2 Rx Beam Peak Note 8 +46.08dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +35.13dB)
	3, 4		-55.7	-55.7	(Table B.2.3-2 Rx Beam Peak Note 8 +49.09dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +38.14dB)
$(Io_{freq\ 1} – Io_{freq\ 2})$	1~4	dB	0		11.95	

NOTE 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 2: SSB_RP, Es/Iot, Io, ($SSB_RP_{Cell\ 3} – SSB_RP_{Cell\ 2}$) and ($Io_{freq\ 2} – Io_{freq\ 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

NOTE 3: Void

NOTE 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

NOTE 5: Void

NOTE 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P or ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.

NOTE 7: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

NOTE 8: The value in Table B.2.3-2 of TS 38.133 [6] is the Minimum SSB_RP for SCS_{SSB} = 120 kHz, selected according to the operating band of Cell 3 and UE power class, without $\Delta MB_{P,n}$ adjustment.

Table 5.7.1.2.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5 for test configuration 1

UE power class 3				
Normal Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 2)	n257, n258, n261	41	n257, n258, n261	33
	n260	39	n260	34
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	All bands: 109		n257, n258, n261	101
			n260	104
			n259	FFS
Lowest reported value (Cell 3)	All bands: 52		n257, n258, n261	32
			n260	34
			n259	FFS
Highest reported value (Cell 3)	All bands: 109		n257, n258, n261	87
			n260	90
			n259	FFS
Extreme Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 2)	n257, n258, n261	41 + FFS	n257, n258, n261	33 + FFS
	n260	39 + FFS	n260	34 + FFS
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	All bands: 109 + FFS		n257, n258, n261	101 + FFS
			n260	104 + FFS
			n259	FFS
Lowest reported value (Cell 3)	All bands: 52 + FFS		n257, n258, n261	32+ FFS
			n260	34+ FFS
			n259	FFS
Highest reported value (Cell 3)	All bands: 109 + FFS		n257, n258, n261	87+ FFS
			n260	91+ FFS
			n259	FFS

Table 5.7.1.2.5-3a: evaluation limits for the Δ(Max-Min) reportedabsolute values for cell 3 during each time period

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 3	16	16
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 3	16 + FFS	16 + FFS

Table 5.7.1.2.5-4: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5 for test configuration 2

UE power class 3				
Normal Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 2)	n257, n258, n261	41	n257, n258, n261	36
	n260	39	n260	37
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	All bands: 109		n257, n258, n261	104
			n260	107
			n259	FFS
Lowest reported value (Cell 3)	All bands: 52		n257, n258, n261	35
			n260	37
			n259	FFS
Highest reported value (Cell 3)	All bands: 109		n257, n258, n261	90
			n260	93
			n259	FFS
Extreme Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 2)	n257, n258, n261	41 + FFS	n257, n258, n261	28 + FFS
	n260	39 + FFS	n260	30 + FFS
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	All bands: 109 + FFS		n257, n258, n261	91 + FFS
			n260	93 + FFS
			n259	FFS
Lowest reported value (Cell 3)	All bands: 52 + FFS		n257, n258, n261	28+ FFS
			n260	30+ FFS
			n259	FFS
Highest reported value (Cell 3)	All bands: 109 + FFS		n257, n258, n261	91+ FFS
			n260	93+ FFS
			n259	FFS

Table 5.7.1.2.5-5: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 3				
Normal Conditions	**Test 1**		**Test 2 All bands**	
Lowest value (RSRP report Cell 3 – RSRP report Cell 2)	All bands: -23		-37	
Highest value (RSRP report Cell 3 – RSRP report Cell 2)	n257, n258, n261	+26	n257, n258, n261	+17
	n260	+27	n260	+19
	n259	FFS	n259	FFS
Extreme Conditions	**Test 1**		**Test 2 All bands**	
Lowest value (RSRP report Cell 3 – RSRP report Cell 2)	-23 + FFS		-37+ FFS	
Highest value (RSRP report Cell 3 – RSRP report Cell 2)	n257, n258, n261	+26 + FFS	n257, n258, n261	+17 + FFS
	n260	+27+ FFS	n260	+19 + FFS
	n259	FFS	n259	FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 to R6) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.1.3 EN-DC FR1-FR2 SS-RSRP measurement accuracy

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- E-UTRA - FR2 OTA testability is still FFS.

5.7.1.3.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP measurement accuracy for NR FR2 is within the specified limits for all bands, when the PSCell is on an NR FR1 carrier.

5.7.1.3.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

5.7.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.1.3.

5.7.1.3.4 Test description

Three cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell, Cell 2 is the NR FR1 PSCell and Cell 3 is the NR FR2 neighbour cell on a NR FR2 carrier.

5.7.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.1.3.4.1-1.

Table 5.7.1.3.4.1-1: Supported test configurations

Config	Description of serving cell	Description of target cell
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Configure the test equipment and the DUT according to the parameters in Table 5.7.1.3.4.1-2.

Table 5.7.1.3.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the test configuration selected from Table 5.7.1.3.4.1-1.	
Propagation conditions	AWGN	As specified in clause C.2.1

Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 5.7.1.3.4.1-3.
2. Message contents are defined in clause 5.7.1.3.4.3.
3. There are three carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier, Cell 2 is the NR PSCell on the NR FR1 carrier and Cell 3 is the neighbour cell on the NR FR2 carrier. Cell 3 is the target for the SS-RSRP measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.
4. The directions in which the UE meets the EIS spherical coverage criteria have been found with one of the procedures from Annex I.

5.7.1.3.4.2 Test procedure

1. Configure the positioning system for a valid test point as defined in A.9.2. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 5.7.1.3.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport for the following requirements:

   - R1: The SS-RSRP value of Cell 3 reported by the UE is compared to the expected SS-RSRP for Cell 3. If the value is outside the limits in Table 5.7.1.3.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G for each of the requirements is achieved. The evaluation of a specific requirement is concluded when the confidence level for that requirement is reached, even if more measurement reports are required for the remaining requirements.
8. The SS shall select a new test point as defined in A.9.2 and rotate the positioning system for the selected test point.
9. Set the parameters according to Test 2 in Table 5.7.1.3.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements:

   - R2: The SS-RSRP value of Cell 3 reported by the UE is compared to the expected SS-RSRP for Cell 3. If the value is outside the limits in Table 5.7.1.3.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

5.7.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.1.3.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, Synchronous cells Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.1.3.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

5.7.1.3.5 Test requirement

Table 5.7.1.3.5-1 defines the cell specific settings for all tests. Table 5.7.1.3.5-2 defines the OTA primary level settings including test tolerances for all tests.

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clause 5.7.1.0.2. The following requirements are to be verified:

During Test 1:

R1: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table 5.7.1.3.5-3.

During Test 2:

R2: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table 5.7.1.3.5-3.

Table 5.7.1.3.5-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1~6		freq1	freq2	freq1	freq2
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66
	2,5		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3,6		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Data RBs allocated	1,2,4,5		52	24	52	66
	3,6		106		106	
Gap pattern ID			0		0	
Duplex mode	1,4		FDD	TDD	FDD	TDD
	2,5		TDD		TDD	

	3,6		TDD		TDD	
TDD configuration	1,4		N/A	TDDConf. 3.1	N/A	TDDConf. 3.1
	2,5		TDDConf. 1.1		TDDConf. 1.1	
	3,6		TDDConf. 2.1		TDDConf. 2.1	
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	2,5		SR.1.1 TDD		SR.1.1 TDD	
	3,6		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
	2,5		CR.1.1 TDD	-	CR.1.1 TDD	-
	3,6		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2,5		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3,6		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1,4		SSB.1 FR1	SSB.3 FR2	SSB.1 FR1	SSB.3 FR2
	2,5		SSB.1 FR1		SSB.1 FR1	
	3,6		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~6		OP.1	OP.3	OP.1	OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~6		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~6		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~6		TCI.State.2		TCI.State.2	
SMTC configuration	1~6		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 3	1~6	µs	3		3	
EPRE ratio of PSS to SSS	1~6	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition	1~6	-	NA	AWGN	NA	AWGN
Antenna configuration	1~6	-	Link only, see clause A.3.7A of TS 38.133 [6]	1x2	Link only, see clause A.3.7A of TS 38.133 [6]	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void						

Table 5.7.1.3.5-2: SS-RSRP inter-frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration according to clause A.9			NA	Setup 2b	NA	Setup 2b
Assumption for UE beams Note 4			N/A	Rough	N/A	Rough

N_{oc}	1~6	dBm/15 kHz	NA Link only, see clause A.3.7A of TS 38.133 [6]	-95.5	NA Link only, see clause A.3.7A of TS 38.133 [6]	NA
N_{oc}	1~6	dBm/SSB SCS		-86.47		NA
$\hat{E}_s / N_{oc}$	1~6	dB		5		NA
E_s	1~6	dBm/SCS		NA		(Table B.2.3-2 Spherical coverage +6.5dB)
SSB_RP[Note1]	1~6	dBm/SCS		-81.47		(Table B.2.3-2 Spherical coverage +6.5dB)
$\hat{E}_s / I_{otBB}$[Note6]	1~6	dB		4.35		1.69
Io[Note1]	1~6	dBm/ 95.04MHz		-55.68		SSB_RP+34.48

Note 1: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 2: Void
Note 3: No additional noise is added by the test system in Test 2.
Note 4: Information about types of UE beam is given in B.2.1.3, of TS 38.133 [6] and does not limit UE implementation or test system implementation.
Note 5: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [2], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [2] Table 6.2.1.3-4.

Table 5.7.1.3.5-3: evaluation limits for the reported values for Test 1 and Test 2 absolute accuracy rules R1, R2

UE power class 3				
Normal Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 3)	n257, n258, n261	46	n257, n258, n261	46
	n260	45	n260	47
	n259	FFS	n259	FFS
Highest reported value (Cell 3)	n257, n258, n261	103	n257, n258, n261	101
	n260	102	n260	104
	n259	FFS	n259	FFS
Extreme Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 3)	n257, n258, n261	FFS	n257, n258, n261	FFS
	n260	FFS	n260	FFS
	n259	FFS	n259	FFS
Highest reported value (Cell 3)	n257, n258, n261	FFS	n257, n258, n261	FFS
	n260	FFS	n260	FFS
	n259	FFS	n259	FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 and R2) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.2 SS-RSRQ

5.7.2.0 Minimum conformance requirements

5.7.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 5.7.2.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.2.0.1-1: SS-RSRQ Intra frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz | SCS_{SSB} = 240kHz	
±2.5	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival	-50
±3.5	±4	≥-6		
NOTE 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.				

The reporting range of SS-RSRQ is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.2.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.8.1 and 10.1.11.

5.7.2.0.2 Inter-frequency SS-RSRQ measurement accuracy requirements

5.7.2.0.2.1 Absolute SS-RSRQ Accuracy

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 5.7.2.0.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.2.0.2.1-1: SS-RSRQ Inter frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz | SCS_{SSB} = 240kHz	
±2.5	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival	-50
±3.5	±4	≥-4		
NOTE 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.				

The reporting range of SS-RSRQ is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.2.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.10.1 and 10.1.11.

5.7.2.0.2.2 Relative SS-RSRQ Accuracy

The relative accuracy of SS-RSRQ in inter frequency case is defined as the RSRQ measured from one cell on a frequency in FR2 compared to the RSRP measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 5.7.2.0.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- | Channel 1_Io -Channel 2_Io | ≤ 20 dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.2.0.2.2-1: SS-RSRQ Inter frequency relative accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz | SCS_{SSB} = 240kHz	
±3	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival	-50
±4	±4	≥-4		
NOTE 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 3: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 4: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.				

The reporting range of SS-RSRQ is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.2.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.10.1 and 10.1.11.

5.7.2.1 EN-DC FR2 SS-RSRQ measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

5.7.2.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRQ measurement accuracy for NR FR2 is within the specified limits for all bands.

5.7.2.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

5.7.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.2.1.

5.7.2.1.4 Test description

Three cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell, Cell 2 is the NR FR2 PSCell and Cell 3 is the NR FR2 neighbour cell on the same frequency as the PSCell.

5.7.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.2.1.4.1-1.

Table 5.7.2.1.4.1-1: Supported test configurations

Configuration	Description
5.7.2.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
5.7.2.1-2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.7.2.1.4.1-2.

Table 5.7.2.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 5.7.2.1.4.3.

2. There are two carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier, Cell 2 is the NR PSCell on the NR FR2 carrier and Cell 3 is the neighbour cell on the same NR FR2 carrier. Cell 3 is the target for the SS-RSRQ measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.2.1.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

2. Set the parameters according to Table 5.7.2.1.5-1 as appropriate.

3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport. The SS-RSRQ value of Cell 3 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 5.7.2.1.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 5.7.2.1.5-2 as appropriate and repeat steps 5-7.

5.7.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition Synchronous cells Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
sinr	false		

}			
maxReportCells	2		
}			
}			
}			

5.7.2.1.5 Test requirement

Table 5.7.2.1.5-1 defines the cell specific settings for all tests. Table 5.7.2.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 5.7.2.1.5-2 shall meet the corresponding absolute accuracy requirements in Table 5.7.2.1.5-3.

Table 5.7.2.1.5-1: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
TCI state			TCI.State.0		TCI.State.0	
PDSCH Reference measurement channel			SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC.1			
SSB configuration			SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
SS-RSSI-Measurement			Not Applicable			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition			AWGN		AWGN	
Antenna Configuration			1x2		1x2	
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Void. NOTE 3: Void. NOTE 4: Void. NOTE 5: Void						

Table 5.7.2.1.5-2: SS-RSRQ Intra frequency OTA related test parameters

Parameter	Unit	Test 1	Test 2

		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1		Setup 1	
Assumption for UE beams Note 9		Rough			
N_{oc} Note1	dBm/15kHz Note4	-100.7		-96.7	
N_{oc} Note1	dBm/SCS Note3	-91.67		-87.67	
SSB_RP Note2	dBm/SCS Note4	-88.67	-88.67	-90.67	-90.67
SS-RSRQ Note2	dB	-14.81	-14.81	-16.84	-16.84
$\hat{E}_s / I_{ot}$	dB	-1.76	-1.76	-4.76	-4.76
$\hat{E}_s / N_{oc}$	dB	3	3	-3	-3
Io Note2	dBm/95.04 MHz Note4	-55.7		-55.67	-55.67

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: SS-RSRQ and SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 5: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 6: Void.
NOTE 7: Void
NOTE 8: Void
NOTE 9: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 5.7.2.1.5-3: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

UE Power Class 3	Test 1 (All bands)	Test 2	
Normal Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_41	n257, n258, n261	SS-RSRQ_35
		n260	SS-RSRQ_34
		n259	FFS
Highest reported value (Cell 3)	SS-RSRQ_73	All bands	SS-RSRQ_71
Extreme Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_38+ FFS	n257, n258, n261	SS-RSRQ_34+ FFS
		n260	SS-RSRQ_33+ FFS
		n259	FFS
Highest reported value (Cell 3)	SS-RSRQ_76+ FFS	All bands	SS-RSRQ_72+ FFS

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

5.7.2.2 EN-DC FR2-FR2 SS-RSRQ measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- Normal conditions

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test is incomplete for extreme conditions

5.7.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRQ measurement accuracy for NR FR2 is within the specified limits for all bands.

5.7.2.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

5.7.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.2.2.

5.7.2.2.4 Test description

Three cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell, Cell 2 is the NR FR2 PSCell and Cell 3 is the NR FR2 neighbour cell on a different NR FR2 frequency.

5.7.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.2.2.4.1-1.

Table 5.7.2.2.4.1-1: Supported test configurations

Configuration	Description
5.7.2.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
5.7.2.2-2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.7.2.2.4.1-2.

Table 5.7.2.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 5.7.2.2.4.1-3.

2. Message contents are defined in clause 5.7.2.2.4.3.

3. There are three carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier, Cell 2 is the NR PSCell on one of the NR FR2 carriers and Cell 3 is the neighbour cell on the other NR FR2 carrier. Cell 3 is the target for the SS-RSRQ measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.2.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5..
2. Set the parameters according to Table 5.7.2.2.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport for the following requirements:

   - R1: The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ for Cell 2. If the value is outside the limits in Table 5.7.2.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

   - R2: The SS-RSRQ value of Cell 3 reported by the UE is compared to the expected SS-RSRQ for Cell 3. If the value is outside the limits in Table 5.7.2.2.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   - R3: The SS-RSRQ value of Cell 3 reported by the UE is compared to the reported SS-RSRQ of Cell 2. If the resulting value is outside the limits in Table 5.7.2.2.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 5.7.2.2.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements:

   - R4: The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ for Cell 2. If the value is outside the limits in Table 5.7.2.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

   - R5: The SS-RSRQ value of Cell 3 reported by the UE is compared to the expected SS-RSRQ for Cell 3. If the value is outside the limits in Table 5.7.2.2.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R5 is increased by one. Otherwise, the number of passed iterations for R5 is increased by one.

   - R6: The SS-RSRQ value of Cell 3 reported by the UE is compared to the reported SS-RSRQ of Cell 2. If the resulting value is outside the limits in Table 5.7.2.2.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed iterations for R6 is increased by one. Otherwise, the number of passed iterations for R6 is increased by one.

5.7.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.2.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, Synchronous cells Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.2.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

5.7.2.2.5 Test requirement

Table 5.7.2.2.5-1 defines the cell specific settings for all tests. Table 5.7.2.2.5-2 defines the OTA primary level settings including test tolerances for all tests.

The SS-RSRQ measurement accuracy shall fulfil the absolute accuracy requirements in clause 5.7.2.0.2.1 and relative accuracy requirements in clause 5.7.2.0.2.2. The following eight requirements are to be verified:

During T1:

R1: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRQ is in the range shown in Table 5.7.2.2.5-3.

R2: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRQ is in the range shown in Table 5.7.2.2.5-3.

R3: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRQ meets the requirements in Table 5.7.2.2.5-4.

During T2:

R4: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRQ is in the range shown in table 5.7.2.2.5-3.

R5: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRQ is in the range shown in table 5.7.2.2.5-3.

R6: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRQ meets the requirements in Table 5.7.2.2.5-4.

Table 5.7.2.2.5-1: SS-RSRQ Inter frequency general test parameters

Parameter	**Unit**	**Test 1**		**Test 2**	
		Cell 2	**Cell 3**	**Cell 2**	**Cell 3**
SSB ARFCN		Freq1	freq2	freq1	Freq2
Duplex mode		TDD		TDD	

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		66		66	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Void NOTE 3: Void NOTE 4: Void					

Table 5.7.2.2.5-2: SS-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
AoA setup		Setup 1		Setup 1	
Assumption for UE beams Note 8		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-95.93	-95.93	-95.44	-95.44
N_{oc} Note1	dBm/SCS Note3	-86.9	-86.9	-86.41	-86.41
$\hat{E}_s / N_{oc}$	dB	-1.75	-1.75	-3	-3
SSB_RP Note2	dBm/SCS Note4	-88.65	-88.65	-89.41	-89.41
SS-RSRQ Note2	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$	dB	-1.75	-1.75	-3	-3

Io[Note2]	dBm/95.04 MHz [Note4]	-55.7	-55.7	-55.7	-55.7

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 5: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 6: Void
NOTE 7: Void
NOTE 8: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 5.7.2.2.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 2)	RSRQ_41	RSRQ_37
Highest reported value (Cell 2)	RSRQ_73	RSRQ_74
Lowest reported value (Cell 3)	RSRQ_41	RSRQ_37
Highest reported value (Cell 3)	RSRQ_73	RSRQ_74
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 2)	RSRQ_41 + FFS	RSRQ_37 + FFS
Highest reported value (Cell 2)	RSRQ_73 + FFS	RSRQ_74 + FFS
Lowest reported value (Cell 3)	RSRQ_41 + FFS	RSRQ_37 + FFS
Highest reported value (Cell 3)	RSRQ_73 + FFS	RSRQ_74 + FFS

Table 5.7.2.2.5-4: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest value (RSRQ report Cell 3 – RSRQ report Cell 2)	- 7	- 9
Highest value (RSRQ report Cell 3 – RSRQ report Cell 2)	+ 7	+ 9
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest value (RSRQ report Cell 3 – RSRQ report Cell 2)	– 7 + FFS	– 9 + FFS
Highest value (RSRQ report Cell 3 – RSRQ report Cell 2)	+ 7 + FFS	+ 9 + FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 to R6) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.3 SS-SINR

5.7.3.0 Minimum conformance requirements

5.7.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 5.7.3.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.3.0.1-1: SS-SINR Intra frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz | SCS_{SSB} = 240kHz	
±3	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival	-50
±3.5	±4	≥-6		
NOTE 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table. NOTE 4: The requirements apply for SSB Ês/Iot ≤ 25 dB.				

The reporting range of SS-SINR and CSI-SINR is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.3.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.13.1 and 10.1.16.

5.7.3.0.2 Inter-frequency SS-SINR measurement accuracy requirements

5.7.3.0.2.1 Absolute SS-SINR Accuracy

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 5.7.3.0.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.3.0.2.1-1: SS-SINR Inter frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz | SCS_{SSB} = 240kHz	
±3	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival	-50
±3.5	±4	≥-4		

NOTE 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
NOTE 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
NOTE 4: The requirements apply for SSB Ês/Iot ≤ 25 dB.

The reporting range of SS-SINR and CSI-SINR is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.3.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.15.1 and 10.1.16.

5.7.3.0.2.2 Relative SS-SINR Accuracy

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency in FR2 compared to the SS-SINR measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 5.7.3.0.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- $|$ Channel 1_Io -Channel 2_Io $| \leq 20$ dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.3.0.2.2-1: SS-SINR Inter frequency relative accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 1	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz | SCS_{SSB} = 240kHz	
±3.5	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival	-50
±4	±4	≥-6		

NOTE 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
NOTE 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 3: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 4: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
NOTE 5: The requirements apply for SSB Ês/Iot ≤ 25 dB.

The reporting range of SS-SINR and CSI-SINR is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.3.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.15.1 and 10.1.16.

5.7.3.1 EN-DC FR2 SS-SINR measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- Normal conditions

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test is incomplete for extreme conditions

5.7.3.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-SINR measurement accuracy for NR FR2 is within the specified limits for all bands.

5.7.3.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards, which support ss-SINR-Meas.

5.7.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.3.1.

5.7.3.1.4 Test description

Three cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell, Cell 2 is the NR FR2 PSCell and Cell 3 is the NR FR2 neighbour cell on the same frequency as the PSCell.

5.7.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.3.1.4.1-1.

Table 5.7.3.1.4.1-1: Supported test configurations

Configuration	Description
5.7.3.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
5.7.3.1-2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.7.3.1.4.1-2.

Table 5.7.3.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 5.7.3.1.4.3.

2. There are two carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier, Cell 2 is the NR PSCell on the NR FR2 carrier and Cell 3 is the neighbour cell on the same NR FR2 carrier. Cell 3 is the target for the SS-SINR measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.3.1.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 5.7.3.1.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic MeasurementReport. The SS-SINR value of Cell 3 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 5.7.3.1.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 5.7.3.1.5-1 as appropriate and repeat steps 5-7.

5.7.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.3.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition Synchronous cells, SS-SINR Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.3.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			

}			

5.7.3.1.5 Test requirement

Table 5.7.3.1.5-1 defines the cell specific settings for all tests. Table 5.7.3.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

Each SS-SINR measurement report for each of the tests in Table 5.7.3.1.5-2 shall meet the corresponding absolute accuracy requirements in Table 5.7.3.1.5-3.

Table 5.7.3.1.5-1: SS-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated RMSI CORESET Reference Channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation condition		AWGN		AWGN	
Antenna Configuration		1x2		1x2	
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Void NOTE 3: Void NOTE 4: Void					

Table 5.7.3.1.5-2: SS-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1		Setup 1	
Assumption for UE beams Note 9		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105		-105	

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
N_{oc} Note1		dBm/SCS Note3	-96		-96	
SSB_RP Note2		dBm/SCS Note4	-91.46	-93.34	-98.8	-98.8
SS-SINR Note2	n257, 258, n261	dB	-0.18	-3.32	-4.95	-4.95
	n260		-0.31	-3.42	-5.20	-5.20
	n259		-0.39	-3.48	-5.48	-5.48
$\hat{E}_s / I_{ot}$	n257, 258, n261	dB	-0.18	-3.32	-4.95	-4.95
	n260		-0.31	-3.42	-5.20	-5.20
	n259		-0.39	-3.48	-5.48	-5.48
$\hat{E}_s / N_{oc}$		dB	4.54	2.66	-3	-3
Io Note2		dBm/95.04 MHz Note4	-59.43		-63.87	

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: SS-SINR and SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 5: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 6: Void
NOTE 7: Void
NOTE 8: Void
NOTE 9: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 5.7.3.1.5-3: SS-SINR Intra frequency absolute accuracy requirements for the reported values

UE Power Class 3	Test 1		Test 2	
Normal Conditions				
Lowest reported value (Cell 3)	n257, n258, n261	SS-SINR_22	All bands	SS-SINR_18
	n260	SS-SINR_21		
	n259	FFS		
Highest reported value (Cell 3)	All bands	SS-SINR_58	n257, n258, n261	SS-SINR_55
			n260	SS-SINR_54
			n259	FFS
Extreme Conditions				
Lowest reported value (Cell 3)	n257, n258, n261	SS-SINR_21+ FFS	All bands	SS-SINR_17+ FFS
	n260	SS-SINR_20+ FFS		
	n259	FFS		
Highest reported value (Cell 3)	All bands	SS-SINR_59+ FFS	n257, n258, n261	SS-SINR_56+ FFS
			n260	SS-SINR_55+ FFS
			n259	FFS

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

5.7.3.2 EN-DC FR2-FR2 SS-SINR measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- Normal conditions

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test is incomplete for extreme conditions

5.7.3.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-SINR measurement accuracy for NR FR2 is within the specified limits for all bands

5.7.3.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards, which support ss-SINR-Meas.

5.7.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.3.2.

5.7.3.2.4 Test description

Three cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell, Cell 2 is the NR FR2 PSCell and Cell 3 is the NR FR2 neighbour cell on a different NR FR2 frequency.

5.7.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.3.2.4.1-1.Table 5.7.3.2.4.1-1: Supported test configurations

Configuration	Description
5.7.3.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
5.7.3.2-2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.7.3.2.4.1-2.

Table 5.7.3.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 5.7.3.2.4.1-3.

2. Message contents are defined in clause 5.7.3.2.4.3.

3. There are three carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier, Cell 2 is the NR PSCell on one of the NR FR2 carriers and Cell 3 is the neighbour cell on the

other NR FR2 carrier. Cell 3 is the target for the SS-SINR measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.3.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5

2. Set the parameters according to Table 5.7.3.2.5-1 as appropriate.

3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic MeasurementReport for the following requirements:

   - R1: The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR for Cell 2. If the value is outside the limits in Table 5.7.3.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

   - R2: The SS-SINR value of Cell 3 reported by the UE is compared to the expected SS-SINR for Cell 3. If the value is outside the limits in Table 5.7.3.2.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   - R3: The SS-SINR value of Cell 3 reported by the UE is compared to the reported SS-SINR of Cell 2. If the resulting value is outside the limits in Table 5.7.3.2.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 5.7.3.2.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements for Test 2:

   - R4: The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR for Cell 2. If the value is outside the limits in Table 5.7.3.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

   - R5: The SS-SINR value of Cell 3 reported by the UE is compared to the expected SS-SINR for Cell 3. If the value is outside the limits in Table 5.7.3.2.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R5 is increased by one. Otherwise, the number of passed iterations for R5 is increased by one.

   - R6: The SS-SINR value of Cell 3 reported by the UE is compared to the reported SS-SINR of Cell 2. If the resulting value is outside the limits in Table 5.7.3.2.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed iterations for R6 is increased by one. Otherwise, the number of passed iterations for R6 is increased by one.

   And the following requirements for Test 3:

   - R7: The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR for Cell 2. If the value is outside the limits in Table 5.7.3.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R7 is increased by one. Otherwise, the number of passed iterations for R7 is increased by one.

- R8: The SS-SINR value of Cell 3 reported by the UE is compared to the expected SS-SINR for Cell 3. If the value is outside the limits in Table 5.7.3.2.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R8 is increased by one. Otherwise, the number of passed iterations for R8 is increased by one.

- R9: The SS-SINR value of Cell 3 reported by the UE is compared to the reported SS-SINR of Cell 2. If the resulting value is outside the limits in Table 5.7.3.2.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed iterations for R9 is increased by one. Otherwise, the number of passed iterations for R9 is increased by one.

5.7.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.3.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, Synchronous cells, SS-SINR Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.3. 2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

5.7.3.2.5 Test requirement

Table 5.7.3.2.5-1 defines the cell specific settings for all tests. Table 5.7.3.2.5-2 defines the OTA primary level settings including test tolerances for all tests.

The SS-SINR measurement accuracy shall fulfil the absolute accuracy requirements in clause 5.7.3.0.2.1 and relative accuracy requirements in clause 5.7.3.0.2.2. The following eight requirements are to be verified:

During Test 1:

R1: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in Table 5.7.3.2.5-3.

R2: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in Table 5.7.3.2.5-3.

R3: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-SINR meets the requirements in Table 5.7.3.2.5-4.

During Test 2:

R4: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in table 5.7.3.2.5-3.

R5: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in table 5.7.3.2.5-3.

R6: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-SINR meets the requirements in Table 5.7.3.2.5-4.

During Test 3:

R7: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in table 5.7.3.2.5-3.

R8: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in table 5.7.3.2.5-3.

R9: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-SINR meets the requirements in Table 5.7.3.2.5-4.

Table 5.7.3.2.5-1: SS-SINR Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq1	freq2	freq1	Freq2	freq1	Freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		66		66		66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1	SMTC.1	SMTC.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS Note 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
Propagation conditions		AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna Configuration		1x2	1x2	1x2	1x2	1x2	1x2

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Void
NOTE 3: Void
NOTE 4: Void

Table 5.7.3.2.5-2: SS-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration	degrees	Setup 1		Setup 1		Setup 1	
Assumption for UE beams Note 10		Rough		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105	-105	-105.1	-105.1	-105	-105
N_{oc} Note1	dBm/SCS Note3	-96	-96	-96.1	-96.1	-96	-96
$\hat{E}_s / N_{oc}$	dB	-0.5	-0.5	11	11	-2.1	-2.1
SS-RSRP Note2	dBm/SCS Note4	-96.5	-96.5	-85.1	-85.1	-98.1	-98.1
SS-SINR Note2	dB	-0.5	-0.5	11	11	-2.1	-2.1
$\hat{E}_s / I_{ot}$	dB	-0.5	-0.5	11	11	-2.1	-2.1
Io Note2	dBm/95.04 MHz Note4	-69.3	-69.3	-55.75	-55.75	-64.9	-64.9

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 5: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 6: Void
NOTE 7: Void
NOTE 8: Void
NOTE 9: Void
NOTE 10: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 5.7.3.2.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5

UE power class 3						
Normal Conditions	**Test 1 All bands**		**Test 2 All bands**		**Test 3 All bands**	
Lowest reported value (Cell 2)	SINR_27		SINR_48		n257, n258, n261	SINR_23
					n260	SINR_22
					n259	FFS
Highest reported value (Cell 2)	n257, n258, n261	SINR_62	n257, n258, n261	SINR_87	n257, n258, n261	SINR_60
	n260	SINR_61	n260	SINR_86	n260	SINR_59
	n259	FFS	n259	FFS	n259	FFS
Lowest reported value (Cell 3)	SINR_27		SINR_48		n257, n258, n261	SINR_23
					n260	SINR_22
					n259	FFS
Highest reported value (Cell 3)	n257, n258, n261	SINR_62	n257, n258, n261	SINR_87	n257, n258, n261	SINR_60
	n260	SINR_61	n260	SINR_86	n260	SINR_59
	n259	FFS	n259	FFS	n259	FFS
Extreme Conditions	**Test 1 All bands**		**Test 2 All bands**		**Test 3 All bands**	
Lowest reported value (Cell 2)	SINR_27 + FFS		SINR_48 + FFS		n257, n258, n261	SINR_23 + FFS
					n260	SINR_22 + FfS
					n259	FFS

Highest reported value (Cell 2)	n257, n258, n261	SINR_62 + FFS	n257, n258, n261	SINR_87 + FFS	n257, n258, n261	SINR_60 + FFS
	n260	SINR_61 + FFS	n260	SINR_86 + FFS	n260	SINR_59 + FFS
	n259	FFS	n259	FFS	n259	FFS
Lowest reported value (Cell 3)	SINR_27 + FFS		SINR_48 + FFS		n257, n258, n261	SINR_23 + FFS
					n260	SINR_22 + FfS
					n259	FFS
Highest reported value (Cell 3)	n257, n258, n261	SINR_62 + FFS	n257, n258, n261	SINR_87 + FFS	n257, n258, n261	SINR_60 + FFS
	n260	SINR_61 + FFS	n260	SINR_86 + FFS	n260	SINR_59 + FFS
	n259	FFS	n259	FFS	n259	FFS

Table 5.7.3.2.5-4: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest value (SINR report Cell 3 – SINR report Cell 2)	- 8	- 17	- 9
Highest value (SINR report Cell 3 – SINR report Cell 2)	+ 8	+ 17	+ 9
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest value (SINR report Cell 3 – SINR report Cell 2)	– 8 + FFS	– 17 + FFS	– 9 + FFS
Highest value (SINR report Cell 3 – SINR report Cell 2)	+ 8 + FFS	+ 17 + FFS	+ 9 + FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 to R6) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.4 L1-RSRP

5.7.4.0 Minimum conformance requirements

5.7.4.0.1 SSB-based L1-RSRP absolute measurement accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 5.7.4.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.4.0.1-1: SSB based L1-RSRP absolute accuracy in FR2

Accuracy		**Conditions**			
Normal condition	**Extreme condition**	**SSB Ês/Iot**	**Io [Note 1] range**		
			Minimum Io		**Maximum Io**
dB	**dB**	**dB**	**dBm / SCS_{SSB} [Note 2]**	**$dBm/BW_{Channel}$**	**$dBm/BW_{Channel}$**

			SCS_{SSB} = 120kHz	**SCS_{SSB} = 240kHz**		
±6.5	±9.5	≥-3	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±8.5	±11.5	≥-3	N/A		-70	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 4.7.4.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.20.1.1 and 10.1.6.

5.7.4.0.2 SSB-based L1-RSRP relative measurement accuracy requirements

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the serving cell.

The accuracy requirements in Table 5.7.4.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 of TS 38.133 [6] for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.4.0.2-1: SSB based L1-RSRP relative accuracy in FR2

Accuracy		**Conditions**		
Normal condition	**Extreme condition**	**SSB Ês/Iot**	**Io [Note 1] range**	
			Minimum Io	**Maximum Io**
dB	**dB**	**dB**	**dBm / SCS_{SSB} [Note 3]**	**dBm/$BW_{Channel}$**
			SCS_{SSB} = 120kHz / **SCS_{SSB} = 240kHz**	
±6.5	±9.5	≥-3	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of SSBs to which the requirement applies. NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 4: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.				

The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 4.7.4.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.20.1.2 and 10.1.6.

5.7.4.0.3 CSI-RS-based L1-RSRP absolute measurement accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-RSRP in this clause apply to all CSI-RS resources of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 5.7.4.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 of TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.4.0.3-1.

Table 5.7.4.0.3-1: CSI-RS based L1-RSRP absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±6.5	±9.5	≥-3	Same value as CSI-RS_RP in Table B.2.4.2-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±8.5	±11.5	≥-3	N/A		-70	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 4.7.4.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.20.2.1 and 10.1.6.

5.7.4.0.4 CSI-RS-based L1-RSRP relative measurement accuracy requirements

The relative accuracy of CSI-RS based L1-RSRP is defined as the L1-RSRP measured from one CSI-RS compared to the largest measured value of L1-RSRP among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 5.7.4.0.4-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 of TS 38.133 for a corresponding Band for each relevant CSI-RS.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.4.0.4-1.

Table 5.7.4.0.4-1: CSI-RS based L1-RSRP relative accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 1 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS}	$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz / SCS_{CSI-RS} = 120kHz	
±6.5	±9.5	≥-3	Same value as CSI-RS RP in Table B.2.4.2-2, according to UE Power class, operating band and angle of arrival	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
NOTE 4: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 4.7.4.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.20.2.2 and 10.1.6.

5.7.4.1 EN-DC FR2 SSB based L1-RSRP measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

5.7.4.1.1 Test purpose

The purpose of this test is to verify that the SSB based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

5.7.4.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

5.7.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.4.0.1 and 5.7.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.4.1.

5.7.4.1.4 Test description

5.7.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.4.1.4.1-1.

Table 5.7.4.1.4.1-1: Supported test configurations

Test Case ID	Description
5.7.4.1-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.7.4.1-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.7.4.1-3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.7.4.1-4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.7.4.1.4.1-2.

Table 5.7.4.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 5.7.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.7.4.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR2 cell. Cell 2 is the PSCell and the target for SSB-based L1-RSRP measurements. The UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The connection setup is done according to the settings in Annex C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.4.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 5.7.4.1.4.1-2.

The test sequence shall be carried out in RRC_CONNECTED for every test case. Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 5.7.4.1.4.1-2.

2. Set the parameters according to T1 in Table 5.7.4.1.5-1. Allow at least BEAM_SELECT_WAIT_TIME (NOTE 1) for the UE Rx beam selection to complete. Afterwards, T1 starts.

3. After 320 ms from the beginning of T1, the UE shall start sending L1-RSRP report including results of both SSB#0 and SSB#1 every 320 slots.

4. The UE shall start sending valid L1-RSRP reports, a valid report shall meet the absolute L1-RSRP requirement for SSB#0 and the relative L1-RSRP requirement for SSB#1. The SS shall checkfollowing requirements:

   - R1: The L1-RSRP value of SSB#0 reported by the UE is compared to the expected L1-RSRP value for SSB#0. If the value is outside the limits in Table 5.7.4.1.5-3, Table 5.7.4.1.5-3a or Table 5.7.4.1.5-4 (depending on the test configuration) or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

   - R2: The DIFF-RSRP value of SSB#1 reported by the UE is compared to the expected DIFF-RSRP value. If the resulting value is outside the limits in Table 5.7.1.1.5-5 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according T2 in Table 5.7.4.1.5-1. Allow at least BEAM_SELECT_WAIT_TIME (NOTE 1) for the UE Rx beam selection to complete. Afterwards, T2 starts.

7. Repeat steps 3-5. In Step 4, The SS shall check the L1-RSRP reported values of SSB#0 and SSB#1 in the periodic L1-RSRP reports for the following requirements.

   - R3: The L1-RSRP value of SSB#0 or SSB#1 reported by the UE is compared to the expected L1-RSRP value. If the value is outside the limits in Table 5.7.4.1.5-3, Table 5.7.4.1.5-3b or Table 5.7.4.1.5-4 (depending on the test configuration) or the UE fails to report the measurement value for SSB#0 or SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   - R4: The DIFF-RSRP value of SSB#0 or SSB#1 reported by the UE is compared to the expected DIFF-RSRP value. If the resulting value is outside the limits in Table 5.7.1.1.5-5 or the UE fails to report the measurement value for SSB#0 or SSB#1, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

NOTE: The BEAM_SELECT_WAIT_TIME default value is defined in Annex K.1.1 in TS 38.521-2 [18].

5.7.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.4.1.4.3-1: Common Exception messages EN-DC SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with conditions SSB and PERIODIC Table H.3.6-10 Table H.3.4-1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.4.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM	

		and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

5.7.4.1.5 Test requirement

Table 5.7.4.1.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 5.7.4.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 5.7.4.1.5-2 for test configurations 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 5.7.4.1.5-3 for test configurations 3 and 6 and Table 5.7.4.1.5-3a for all configurations.

Table 5.7.4.1.5-1: L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~4		freq1	freq1
Duplex mode	1~4		TDD	TDD
TDD Configuration	1~4		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1~4	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Data RBs allocated	1~4		66	66
PDSCH Reference measurement channel	1,2		SR.3.2 TDD	SR.3.2 TDD
	3,4		SR.3.3 TDD	SR.3.3 TDD
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD	CR.3.1 TDD
	3,4		CR.3.2 TDD	CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD	CCR.3.1 TDD
	3,4		CCR.3.7 TDD	CCR.3.7 TDD
SSB configuration	1,2		SSB.1 FR2	SSB.1 FR2
	3,4		SSB.2 FR2	SSB.2 FR2
OCNG Patterns	1~4		OP.1	OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
TRS Configuration	1~4		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2	TCI.State.2
SMTC configuration	1~4		SMTC.1	SMTC.1
reportConfigType	1~4		periodic	periodic
reportQuantity	1~4		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~4		2	2
L1-RSRP reporting period	1~4		slot320	slot320
Propagation condition	1~4		AWGN	AWGN
Antenna configuration			1x2	1x2
EPRE ratio of PSS to SSS	1~4	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				

EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				

Table 5.7.4.1.5-2: L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			SSB0	SSB1	SSB0	SSB1
Angle of arrival configuration			Setup 1 according to A.9.1		Setup 1 according to A.9.1	
Assumption for UE beams Note 4			Rough		Rough	
N_{oc}	1~4	dBm/15 kHz	-104.1		n.a.	
N_{oc}	1,2	dBm/SS B SCS	-95.1		n.a.	
	3,4		-92.1		n.a.	
$\hat{E}_s / I_{ot}$	1~4	dB	10	-1.6	n.a.	
SSB_RP Note1	1,2	dBm/SC S	-85.1	-96.9	As in Table B.2.4-2 + 5.7	
	3,4		-78	-90	As in Table B.2.4-2 + 5.7	
Io Note1	1~4	dBm/ 95.04M Hz	-55.67		SSB_RP+34.68	
$\hat{E}_s / N_{oc}$	1~4	dB	10	-1.6	n.a.	
Note 1: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: Void Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

Table 5.7.4.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2 for the absolute accuracy rules R1, R3

UE power class 3			
Normal Conditions	**Test 1 (SSB#0) All bands**	**Test 2 (SSB#0 or SSB#1)**	
Lowest reported value	42	n257, n258, n261	27
		n260	30
		n259	FFS
Highest reported value	101	n257, n258, n261	83
		n260	86
		n259	FFS
Extreme Conditions	**Test 1 (SSB#0) All bands**	**Test 2 (SSB#0 or SSB#1)**	
Lowest reported value	39+ FFS	n257, n258, n261	24 + FFS
		n260	27 + FFS
		n259	FFS
Highest reported value	104+ FFS	n257, n258, n261	86 + FFS

		n260	89 + FFS
		n259	FFS

Table 5.7.4.1.5-3a: evaluation limits for the Δ(Max-Min) reported values for SSB#0 for rules R1

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0	18 + FFS	18+ FFS

Table 5.7.4.1.5-3b: evaluation limits for the Δ(Max-Min) reported values for SSB#0 or SSB#1 for rules R3

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0 or SSB#1	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0 or SSB#1	18 + FFS	18+ FFS

Table 5.7.4.1.5-4: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3 and 4 for the absolute accuracy rules R1, R3

UE power class 3			
Normal Conditions	**Test 1 (SSB#0) All bands**	**Test 2 (SSB#0 or SSB#1)**	
Lowest reported value	45	n257, n258, n261	30
		n260	33
		n259	FFS
Highest reported value	104	n257, n258, n261	86
		n260	90
		n259	FFS
Extreme Conditions	**Test 1 (SSB#0) All bands**	**Test 2 (SSB#0 or SSB#1)**	
Lowest reported value	42+ FFS	n257, n258, n261	27 + FFS
		n260	30 + FFS
		n259	FFS
Highest reported value	107+ FFS	n257, n258, n261	89 + FFS
		n260	92 + FFS
		n259	FFS

Table 5.7.4.1.5-5: evaluation limits for the reported values for T1 and T2 relative accuracy rules R2, R4

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest DIFF RSRP reported value	2	0
Highest DIFF RSRP reported value	9	+4

Extreme Conditions	Test 1 All bands	Test 2 All bands
Lowest DIFF RSRP reported value	1+ FFS	0+ FFS
Highest DIFF RSRP reported value	12+ FFS	+ 7+ FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 to R6) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.4.2 EN-DC FR2 CSI-RS based L1-RSRP measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

5.7.4.2.1 Test purpose

The purpose of this test is to verify that the CSI-RS based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

5.7.4.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 15 onwards.

5.7.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.4.0. 3 and 5.7.4.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.4.1.

5.7.4.2.4 Test description

5.7.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.4.2.4.1-1.

Table 5.7.4.2.4.1-1: Supported test configurations

Test Case ID	Description
5.7.4.2-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5.7.4.2-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.7.4.2.4.1-2.

Table 5.7.4.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 5.7.4.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 5.7.4.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR2 cell. Cell 2 is the PSCell and the target for CSI-RS-based L1-RSRP measurements. The UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The connection setup is done according to the settings in Annex C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.4.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 5.7.4.2.4.1-2.

The test sequence shall be carried out in RRC_CONNECTED for every test case. Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 5.7.4.2.4.1-2.

2. Set the parameters according to T1 in Table 5.7.4.2.5-1. Allow at least BEAM_SELECT_WAIT_TIME (NOTE 1) for the UE Rx beam selection to complete. Afterwards, T1 starts.

3. After 320 ms from the beginning of T1, the UE shall start sending L1-RSRP report including results of both CSI-RS0 and CSI-RS1.

4. The UE shall start sending valid L1-RSRP reports, a valid report shall meet the absolute L1-RSRP requirement for CSI-RS0 and the relative L1-RSRP requirement for CSI-RS1. The SS shall check for the following requirements:

   - R1: The L1-RSRP value of CSI-RS0 reported by the UE is compared to the expected L1-RSRP value for CSI-RS0. If the value is outside the limits in Table 5.7.4.2.5-3, Table 5.7.4.2.5-3a or Table 5.7.4.2.5-4 (depending on the test configuration) or the UE fails to report the measurement value for CSI-RS0, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

   - R2: The DIFF-RSRP value of CSI-RS1 reported by the UE is compared to the expected DIFF-RSRP value. If the resulting value is outside the limits in Table 5.7.1.1.5-5 or the UE fails to report the measurement value for CSI-RS1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according T2 in Table 5.7.4.2.5-1. Allow at least BEAM_SELECT_WAIT_TIME (NOTE 1) for the UE Rx beam selection to complete. Afterwards, T2 starts.

7. Repeat steps 3-5. In Step 4, The SS shall check the L1-RSRP reported values of CSI-RS0 and CSI-RS1 in the periodic L1-RSRP reports for the following requirements.

   - R3: The L1-RSRP value of CSI-RS0 or CSI-RS1 reported by the UE is compared to the expected L1-RSRP value. If the value is outside the limits in Table 5.7.4.2.5-3, Table 5.7.4.2.5-3b or Table 5.7.4.2.5-4 (depending on the test configuration) or the UE fails to report the measurement value for CSI-RS0 or CSI-

RS1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

- R4: The DIFF-RSRP value of CSI-RS0 or CSI-RS1 reported by the UE is compared to the expected DIFF-RSRP value. If the resulting value is outside the limits in Table 5.7.1.1.5-5 or the UE fails to report the measurement value for CSI-RS0 or CSI-RS1, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

NOTE: The BEAM_SELECT_WAIT_TIME default value is defined in Annex K.1.1 in TS 38.521-2 [18].

5.7.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.4.2.4.3-1: Common Exception messages EN-DC CSI-RS based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and CSI-RSRP Table H.3.6-3 with conditions CSI-RS and PERIODIC Table H.3.4-1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.4.2.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

5.7.4.2.5 Test requirement

Table 5.7.4.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 5.7.4.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 5.7.4.2.5-2 for test configurations 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 5.7.4.2.5-3 for test configurations 3 and 6 and Table 5.7.4.2.5-3a for all configurations.

Table 5.7.4.2.5-1: L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~2		freq1	freq1
Duplex mode	1~2		TDD	TDD
TDD Configuration	1~2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD	CR.3.1 TDD

Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2	SSB.1 FR2
OCNG Patterns	1~2		OP.1	OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
TRS Configuration	1~2		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2	TCI.State.2
SMTC configuration	1~2		SMTC.1	SMTC.1
CSI-RS	1~2		CSI-RS.3.2 TDD	CSI-RS.3.2 TDD
reportConfigType	1~2		periodic	periodic
reportQuantity	1~2		cri-RSRP	cri-RSRP
Number of reported RS	1~2		2	2
L1-RSRP reporting period	1~2		slot320	slot320
Propagation condition	1~2		AWGN	AWGN
Antenna configuration	1~2		1x2	1x2
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				

Table 5.7.4.2.5-2: L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			CSI-RS0	CSI-RS1	CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.9.1		Setup 1 according to A.9.1	
Assumption for UE beams Note 4			Rough		Rough	
N_{oc}	1~2	dBm/15 kHz	-104.10		n.a.	
N_{oc}	1~2	dBm/SSB SCS	-95.11		n.a. n.a.	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-1.8	n.a.	
CSI-RS_RP Note1	1~2	dBm/SCS	-85.11	-96.93	As in Table B.2.4.2-2 + 5.7	
Io Note1	1~2	dBm/95.04MHz	-55.67		CSI-RS_RP+34.68	
$\hat{E}_s / N_{oc}$	1~2	dB	10	-1.82	n.a.	
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

Note 2:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 3:	No additional noise is added by the test system in Test 2.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 5.7.4.2.5-3: L1-RSRP absolute accuracy requirements for the reported values for the absolute accuracy rules R1, R3

UE power class 3			
Normal Conditions	**Test 1 (CSI-RS0) All bands**	**Test 2 (CSI-RS0 or CSI-RS1)**	
Lowest reported value	42	n257, n258, n261	27
		n260	30
		n259	FFS
Highest reported value	101	n257, n258, n261	83
		n260	86
		n259	FFS
Extreme Conditions	**Test 1 (CSI-RS0) All bands**	**Test 2 (CSI-RS0 or CSI-RS1)**	
Lowest reported value	39+ FFS	n257, n258, n261	25 + FFS
		n260	27 + FFS
		n259	FFS
Highest reported value	104+ FFS	n257, n258, n261	86 + FFS
		n260	89 + FFS
		n259	FFS

Table 5.7.4.2.5-3a: evaluation limits for the Δ(Max-Min) reported values for CSI-RS#0 for rules R1

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0	18 + FFS	18+ FFS

Table 5.7.4.2.5-3b: evaluation limits for the Δ(Max-Min) reported values for CSI-RS#0 or CSI-RS#1 for rules R3

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0 or CSI-RS#1	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0 or CSI-RS#1	18 + FFS	18+ FFS

Table 5.7.4.2.5-4: evaluation limits for the reported values for T1 and T2 relative accuracy rules R2, R4

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest DIFF RSRP reported value	2	0

Highest DIFF RSRP reported value	9	+ 4
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest DIFF RSRP reported value	1+ FFS	0+ FFS
Highest DIFF RSRP reported value	12+ FFS	+ 7+ FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 to R6) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.5 SRS-RSRP

5.7.5.0 Minimum conformance requirements

5.7.5.0.1 Minimum conformance requirements for SRS-RSRP measurement accuracy

The SRS-RSRP measurement reported by the UE shall fulfil the accuracy requirements defined in Table 5.7.5.0.1-1 for FR1 and Table 5.7.7.0.1-2 for FR2, provided that the following conditions are met. The accuracy requirements in this clause are derived based on AWGN radio propagation conditions.

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for SRS-RSRP measurements are fulfilled according to Annex B.2.z for a corresponding Band for each relevant SRS resource configured for measurement.
- The time difference between UE's DL reference timing in the serving cell and SRS arrival time is no larger than $T_{error_SRS_RSRP}$, where
  - $T_{error_SRS_RSRP} = T_C \times N_{TA_offset}$ + 4.67us for FR1
  - $T_{error_SRS_RSRP} = T_C \times N_{TA_offset}$ + 3.67us for FR2
  - N_{TA_offset} is defined in Table 7.1.2-2
  - T_C is 0.509ns
- The number of SRS ports in the SRS resource configured for measurement is 1,
- The number of symbols in the SRS resource configured for measurement is 1,
- The number of repetitions in the SRS resource configured for measurement is 1,
- Frequency hopping, sequence group hopping or sequence hopping is disabled in the SRS resource configured for measurement,
- The bandwidth of the SRS resource is 48 PRBs.
- One of the following conditions is met
  - There is no other SRS resource with the same root sequence and on the same symbol and with same comb as the relevant SRS resource.
  - If multiple SRS resources are on the same symbol and with same comb, the distance between cyclic shifts of any two resources is no less than 6 if transmissionComb = n4, and no less than 4 if transmissionComb = n2.

Table 5.7.5.0.1-1: SRS-RSRP absolute accuracy in FR1

Accuracy						Conditions						
Normal condition			Extreme condition			SRS Ês/Iot	Io [Note 1] range					
							NR operating band groups [Note 2]	Minimum Io				Maximum Io
dB						dB		dBm / SCS_{SRS}			dBm/BW Channel	dBm/BW Channel
SCS_{SRS} (kHz)			SCS_{SRS} (kHz)									
15	30	60	15	30	60			SCS_{SRS} = 15 kHz	SCS_{SRS} = 30 kHz	SCS_{SRS} = 60 kHz		
±3	±3.5	±5	±7.5	±8	±9.5	≥1	NR_TDD_FR1_A,	-120	-117	-114	N/A	-70
							NR_TDD_FR1_C	-119	-116	-113	N/A	-70
							NR_TDD_FR1_D	-118.5	-115.5	-112.5	N/A	-70
							NR_TDD_FR1_E	-118	-115	-112	N/A	-70
±6.5	±7	±8.5	±9.5	±10	±11.5	≥1	NR_TDD_FR1_A, NR_TDD_FR1_C, NR_TDD_FR1_D, NR_TDD_FR1_E	N/A	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

Table 5.7.5.0.1-2: SRS-RSRP absolute accuracy in FR2

Accuracy				Conditions			
Normal condition		Extreme condition		SRS Ês/Iot	Io [Note 1] range		
					Minimum Io		Maximum Io
dB				dB	dBm / SCS_{SRS} [Note 2]	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
SCS_{SRS} (kHz)		SCS_{SRS} (kHz)			SCS_{SRS} = 60kHz / SCS_{SRS} = 120kHz		
60	120	60	120				
±6	±8.5	±9	±11.5	≥1	Same value as SRS_RP in Table B.2.7-2, according to UE Power class, operating band and angle of arrival	N/A	-70
±9	±11.5	±11	±13.5	≥1	N/A	-70	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

5.7.5.0.1.1 SRS-RSRP report mapping

The reporting range of SRS-RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution. The mapping of measured quantity is defined in Table 5.7.7.0.1.2-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 5.7.7.0.1.2-1: SRS-RSRP measurement report mapping

Reported value	Measured quantity value	Unit
SRS-RSRP_0	SRS-RSRP<-140	dBm
SRS-RSRP_1	-140≤ SRS-RSRP<-139	dBm
SRS-RSRP_2	-139≤ SRS-RSRP<-138	dBm
SRS-RSRP_3	-138≤ SRS-RSRP<-137	dBm
SRS-RSRP_4	-137≤ SRS-RSRP<-136	dBm
..	..	…
SRS-RSRP_95	-46≤ SRS-RSRP<-45	dBm
SRS-RSRP_96	-45≤ SRS-RSRP<-44	dBm
SRS-RSRP_97	-44≤ SRS-RSRP	dBm
SRS-RSRP_98	Infinity	
Note: 'Infinity' means that UE cannot detect SRS due to too strong signal to measure.		

The normative reference for this requirement is TS 38.133 [6] clause 10.1.22.1.

5.7.5.1 EN-DC FR2 SRS-RSRP measurement accuracy

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD:

- The test procedure is incomplete
- The message content is FFS
- MU/TT analysis for UE PC3 and test frequency f ≤ 40.8 GHz is complete.
- MU/TT analysis for UE power class other than PC3 is incomplete.
- MU//TT analysis for test frequency f > 40.8 GHz is incomplete.

5.7.5.1.1 Test purpose

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits with SRS-RSRP measurement requirements in TS 38.133 [6] clause 10.1.22.1.1.

5.7.5.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards and CLI-SRS-RSRP

5.7.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.5.1.

5.7.5.1.4 Test description

5.7.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.5.1.4.1-1.

Table 5.7.5.1.4.1-1: EN-DC FR2 SRS-RSRP accuracy supported test configurations

Config	Description
5.7.5.1 - 1	LTE FDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
5.7.5.1 - 2	LTE TDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 5.7.5.1.4.1-2.

Table 5.7.5.1.4.1-2: Initial conditions EN-DC FR2 SRS-RSRP measurement accuracy

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 5.7.5.1.4.3.
2. In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2).
3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.5.1.4.2 Test procedure

There are two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2)

The test parameters and applicability for Cell 1 are defined in A.3.7.2 of 38.133. The test parameters for the Cell 2 are given in Table 5.7.5.1.5-1 and 5.7.5.1.5-2 below. The test parameter for the (virtual) neighbour cell UE transmitting SRS are given in Table 5.7.5.1.5-2.

Before the test UE is configured to perform SRS-RSRP measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS configuration in Table 5.7.5.1.5-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 5.7.5.1.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.

<rest of the steps are FFS>

5.7.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

FFS

5.7.5.1.5 Test requirement

Table 5.7.5.1.5-1 defines the cell specific settings for all tests. Table 5.7.5.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in table 5.7.5.1.5-3 and absolute accuracy requirements in table 5.7.5.1.5-4. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table 5.7.5.1.5-4.

During T2:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table 5.7.5.1.5-4.

Table 5.7.5.1.5-1: FR2 test parameters for SRS-RSRP accuracy

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~2		freq1	freq1
Duplex mode	1~2		TDD	TDD
TDD configuration	1~2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1~2		SSB.3 FR2	SSB.3 FR2
OCNG Patterns	1~2		OP.1	OP.1
TRS configuration	1~2		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1	SMTC.1
Time offset between DL from serving cell and SRS from test system	1~2	μs	10.76	10.67
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1~2		AWGN	AWGN
Antenna configuration	1~2		1x2	1x2
SRS configuration	1~2		SRSConf.1	SRSConf.1
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table 5.7.5.1.5-2: SRS-RSRP accuracy OTA related test parameters for PSCell and Neighbour cell UE in FR2

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.9.1	Setup 1 defined A.9.1

Beam assumption Note 5		Fine	Fine
N_{oc} Note1	dBm/15kHz Note3	-100	N/A
N_{oc} Note1	dBm/SCS Note3	-91	N/A
$\hat{E}_s / N_{oc}$	dB	2	N/A
E_S	dBm/SCS Note3		(Table B.2.7-2 Rx Beam Peak)+5
SRS_RP Note2	dBm/SCS	-89	(Table B.2.7-2 Rx Beam Peak) +5
$\hat{E}_s / I_{ot\ BB}$ Note4	dB	>1	1
Io Note2	dBm/95.04 MHz Note3	-57.89	(Table B.2.7-2 Rx Beam Peak +50.79dB)

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Table 5.7.5.1.5-3: SRS configuration parameters for FR2 SRS-RSRP accuracy

	Field	SRSConf.1
SRS-ResourceSet	srs-ResourceSetId	0
	srs-ResourceIdList	0
	resourceType	Periodic
	Usage	Codebook
SRS-Resource	SRS-ResourceId	0
	nrofSRS-Ports	Port1
	transmissionComb	n2
	combOffset-n2	0
	cyclicShift-n2	0
	resourceMapping startPosition	0
	resourceMapping nrofSymbols	n1
	resourceMapping repetitionFactor	n1
	freqDomainPosition	0
	freqDomainShift	0
	freqHopping c-SRS	12
	freqHopping b-SRS	0
	freqHopping b-hop	0
	groupOrSequenceHopping	Neither
	resourceType	Periodic
	periodicityAndOffset-p	sl160,25
	sequenceId	0

Table 5.7.5.1.5-4: SRS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
SRS	SRS_RP -δ +G_{min} ≤ Reported SRS-RSRP(dBm) ≤SRS_RP +δ +G_{max}
Note 1: SRS_RP is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test	
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the Io used in the test	
Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	

The SRS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 5.7.5.0.10.1 The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table 5.7.5.1.5-4.

During T2:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table 5.7.5.1.5-4.

For the test to pass, the ratio of successful reported values for each requirement shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.5.2 EN-DC FR2 CLI-RSSI measurement accuracy

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD:

- The test procedure is incomplete

- The message content is FFS

- TT analysis is missing.

5.7.5.2.1 Test purpose

The purpose of this test is to verify that the CLI-RSSI measurement accuracy is within the specified limits with CLI-RSSI measurement requirements in TS 38.133 [6] clause 10.1.22.2.1.

5.7.5.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards and CLI-CLI-RSSI

5.7.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.5.2.

5.7.5.2.4 Test description

5.7.5.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.5.2.4.1-1.

Table 5.7.5.2.4.1-1: Applicable NR configurations for FR2 CLI-RSSI accuracy test

Config	Description
1	LTE FDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations in each supported band

Configure the test equipment and the DUT according to the parameters in Table 5.7.5.2.4.1-2.

Table 5.7.5.2.4.1-2: Initial conditions EN-DC FR2 CLI-RSSI measurement accuracy

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 5.7.5.2.4.3.
2. In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2).
3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.5.2.4.2 Test procedure

There are two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2)

The test parameters and applicability for Cell 1 are defined in A.3.7.2 of 38.133. The test parameters for the Cell 2 are given in Table 5.7.5.2.5-1 and 5.7.5.2.5-2 below. The test parameter for the (virtual) neighbour cell UE transmitting SRS are given in Table 5.7.5.2.5-2.

Before the test UE is configured to perform CLI-RSSI measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS configuration in Table 5.7.5.2.5-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 5.7.5.2.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.

<rest of the steps are FFS>

5.7.5.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

FFS

5.7.5.2.5 Test requirement

Table 5.7.5.2.5-1 defines the cell specific settings for all tests. Table 5.7.5.2.5-2 defines the OTA primary level settings including test tolerances for all tests.

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in table 5.7.5.2.5-3 and absolute accuracy requirements in table 5.7.5.2.5-4. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table 5.7.5.2.5-4.

During T2:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table 5.7.5.2.5-4.

Table 5.7.5.2.5-1: FR2 test parameters for CLI-RSSI accuracy

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~2		freq1	freq1
Duplex mode	1~2		TDD	TDD
TDD configuration	1~2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1~2		SSB.3 FR2	SSB.3 FR2
OCNG Patterns Note2	1~2		OP.1	OP.1
TRS configuration	1~2		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1	SMTC.1
Time offset between DL from serving cell and OCNG from test system	1~2	μs	10.67	10.67
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1~2		AWGN	AWGN
Antenna configuration	1~2		1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: OCNG is not transmitted in the CLI-RSSI measurement resources.				

Table 5.7.5.2.5-2: CLI-RSSI accuracy OTA related test parameters

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.9.1	
Beam assumption Note 5		Fine	
N_{oc} on CLI-RSSI measurement resource Note1	dBm/15kHz Note3	-100+TT	

N_{oc} on CLI-RSSI measurement resource Note1	dBm/SCS Note3	-91
$\hat{E}_s / N_{oc}$ on CLI-RSSI measurement resource	dB	-Infinity
RSRP on CLI-RSSI measurement resource Note2	dBm/SCS	-Infinity
$\hat{E}_s / I_{ot\ BB}$ on CLI-RSSI measurement resource Note4	dB	-Infinity
Io on CLI-RSSI measurement resource Note2	dBm/95.04 MHz Note3	-62.01
Io on CLI-RSSI measurement resource Note2	dBm/1.08 MHz	-81.46

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Table 5.7.5.2.5-3: CLI-RSSI measurement resource configuration for FR2 CLI-RSSI accuracy

	Field	SRSConf.1
CLI-RSSI measurement resource	rssi-ResourceId	0
	rssi-SCS	120kHz
	startPRB	0
	nrofPRBs	66
	startPosition	3
	nrofSymbols	11
	rssi-PeriodicityAndOffset	sl160, 25

Table 5.7.5.2.5-4: CLI-RSSI absolute accuracy test requirement

	Test requirement Notes1,2,3
	Io -δ +G_{min} ≤ Reported CLI-RSSI(dBm) ≤Io +δ +G_{max}

Note 1: Io is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for 1.08MHz

Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the Io used in the test

Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

The CLI-RSSI measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.22.2.1. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table 5.7.5.2.5-4.

During T2:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table 5.7.5.2.5-4.

5.7.6 L1-SINR measurement for beam reporting

5.7.6.0 Minimum conformance requirements

5.7.6.0.1 L1-SINR accuracy requirements with CSI-RS based CMR and no dedicated IMR configured

5.7.6.0.1.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-SINR in this clause apply to all CSI-RS resources configured as CMR and no dedicated resource configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements in Table 5.7.6.0.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS as CMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 5.7.6.0.1.1-1.

Table 5.7.6.0.1.1-1: L1-SINR absolute accuracy for CSI-RS based CMR only in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 3	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±5.5	±6.5	≥-3	Same value as CSI-RS_RP in Table in B.2.8.1, according to UE Power class, operating band and angle of arrival	N/A	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the CSI-RS CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

5.7.6.0.1.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-SINR is defined as the L1-SINR measured from one CSI-RS compared to the largest measured value of L1-SINR among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 5.7.6.0.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS as CMR is 48 PRBs and the density is 3.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 5.7.6.0.1.2-1.

Table 5.7.6.0.2.1-1: L1-SINR relative accuracy for CSI-RS based CMR only in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 2, Note 4	Io Note 1 range			
			Minimum Io			Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 3		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz		
±[4.5]	±[5.5]	≥-3	Same value as CSI-RS_RP in Table in B.2.8.1, according to UE Power class, operating band and angle of arrival		N/A	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS CMR Ês/Iot is the minimum CSI-RS CMR Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
NOTE 4: In the test cases, the CSI-RS CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

5.7.6.0.2 L1-SINR accuracy requirements with SSB based CMR and dedicated IMR configured

5.7.6.0.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-SINR in this clause apply to all SSBs configured as CMR and dedicated resources configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements are defined in Table 5.7.6.0.2.1-1 for SSB based CMR and NZP-IMR and in Table 5.7.6.0.2.1-2 for SSB based CMR and ZP-IMR.

The accuracy requirements in Tables 5.7.6.0.2.1-1 and 5.7.6.0.2.1-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.

- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.

- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

- AWGN radio propagation conditions.

- SSB based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 5.7.6.0.2.1-1 and 5.7.6.0.2.1-2.

Table 5.7.6.0.2.1-1: L1-SINR absolute accuracy for SSB based CMR and NZP-IMR in FR2

Accuracy	Conditions

Normal condition	Extreme condition	SSB CMR Ês/Iot Note 3	NZP-IMR Ês/Iot Note 3	Io Note 1 range		
				Minimum Io		Maximum Io
dB	dB	dB	dB	dBm / SCS_{SSB} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±4.0	±5.0	≥0	≥0	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/Iot, NZP-IMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

Table 5.7.6.0.2.1-2: L1-SINR absolute accuracy for SSB based CMR and ZP-IMR in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB CMR Ês/Iot Note 3	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±4.5	±5.5	≥-3	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

5.7.6.0.2.2 Relative Accuracy

The relative accuracy of SSB based L1-SINR is defined as the L1-SINR measured from one SSB configured as CMR and one IMR configured as IMR compared to the largest measured value of L1-SINR among all SSB based CMRs and IMRs of the serving cell.

The accuracy requirements are defined in Table 5.7.6.0.2.2-1 for SSB based CMR and NZP-IMR and in Table 5.7.6.0.2.2-2 for SSB based CMR and ZP-IMR.

The accuracy requirements in Tables 5.7.6.0.2.2-1 and 5.7.6.0.2.2-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.
- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].
- AWGN radio propagation conditions.

- SSB based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 5.7.6.0.2.2-1 and 5.7.6.0.2.2-2.

Table 5.7.6.0.2.2-1: L1-SINR relative accuracy for SSB based CMR and NZP-IMR in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	SSB CMR Ês/Iot Note 2, Note 4	NZP-IMR Ês/Iot Note 4	Io Note 1 range		
				Minimum Io		Maximum Io
dB	dB	dB	dB	dBm / SCS_{SSB} Note 3	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 120kHz / SCS_{SSB} = 240kHz		
±[3.0]	±[4.0]	≥0	≥0	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB CMR Ês/Iot is the minimum SSB CMR Ês/Iot of the pair of SSBs to which the requirement applies. NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 4: In the test cases, the SSB CMR Ês/Iot, NZP-IMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

Table 5.7.6.0.2.2-2: L1-SINR relative accuracy for SSB based CMR and ZP-IMR in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB CMR Ês/Iot Note 2, Note 4	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 3	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz / SCS_{SSB} = 240kHz		
±[3.5]	±[4.5]	≥-3	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB CMR Ês/Iot is the minimum SSB CMR Ês/Iot of the pair of SSBs to which the requirement applies. NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 4: In the test cases, the SSB CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

5.7.6.0.3 L1-SINR accuracy requirements with CSI-RS based CMR and dedicated IMR configured

5.7.6.0.3.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-SINR in this clause apply to all CSI-RS resources as CMR and dedicated resources configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements are defined in Table 5.7.6.0.3.1-1 for CSI-RS based CMR and NZP-IMR and in Table 5.7.6.0.3.1-2 for CSI-RS based CMR and ZP-IMR.

The accuracy requirements in Tables 5.7.6.0.3.1-1 and 5.7.6.0.3.1-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].
- AWGN radio propagation conditions.
- CSI-RS based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 5.7.6.0.3.1-1 and 5.7.6.0.3.1-2.

Table 5.7.6.0.3.1-1: L1-SINR absolute accuracy for CSI-RS based CMR and NZP-IMR in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 3	NZP-IMR Ês/Iot Note 3	Io Note 1 range		
				Minimum Io		Maximum Io
dB	dB	dB	dB	dBm / SCS_{CSI-RS} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±4.0	±5.0	≥0	≥0	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.						
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.						
NOTE 3: In the test cases, the CSI-RS Ês/Iot, NZP-IMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

Table 5.7.6.0.3.1-2: L1-SINR absolute accuracy for CSI-RS based CMR and ZP-IMR in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 3	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±4.5	±5.5	≥-3	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.					
NOTE 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

5.7.6.0.3.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-SINR is defined as the L1-SINR measured from one CSI-RS configured as CMR and one IMR configured as IMR compared to the largest measured value of L1-SINR among all CSI-RS based CMRs and IMRs of the serving cell.

The accuracy requirements are defined in Table 5.7.6.0.3.2-1 for CSI-RS based CMR and NZP-IMR and in Table 5.7.6.0.3.2-2 for CSI-RS based CMR and ZP-IMR.

The accuracy requirements in Tables 5.7.6.0.3.2-1 and 5.7.6.0.3.2-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].
- AWGN radio propagation conditions.
- CSI-RS based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 5.7.6.0.3.2-1 and 5.7.6.0.3.2-2.

Table 5.7.6.0.3.2-1: L1-SINR relative accuracy for CSI-RS based CMR and NZP-IMR in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 2, Note 4	NZP-IMR Ês/Iot Note 4	Io Note 1 range		
				Minimum Io		Maximum Io
dB	dB	dB	dB	dBm / SCS_{CSI-RS} Note 3	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±[3.0]	±[4.0]	≥0	≥0	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter CSI-RS CMR Ês/Iot is the minimum CSI-RS CMR Ês/Iot of the pair of CSI-RS resources to which the requirement applies. NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 4: In the test cases, the CSI-RS CMR Ês/Iot, NZP-IMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

Table 5.7.6.0.3.2-2: L1-SINR relative accuracy for CSI-RS based CMR and ZP-IMR in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 2, Note 4	Io Note 1 range	
			Minimum Io	Maximum Io

dB	dB	dB	dBm / SCS_{CSI-RS} Note 3		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz		
±[3.5]	±[4.5]	≥-3	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival		N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter CSI-RS CMR Ês/Iot is the minimum CSI-RS CMR Ês/Iot of the pair of CSI-RS resources to which the requirement applies. NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 4: In the test cases, the CSI-RS CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

5.7.6.1 EN-DC FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- Normal conditions

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

5.7.6.1.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

5.7.6.1.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards, and supporting L1-SINR measurement.

5.7.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.6.1.

5.7.6.1.4 Test description

5.7.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.6.1.4.1-1.

Table 5.7.6.1.4.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 5.7.6.1.4.1-2.

Table 5.7.6.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 5.7.6.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR2 cell. Cell 2 is the PSCell and the target for CSI-RS-based L1-SINR measurements. The UE is configured to perform RLM, BFD and L1-SINR measurement based on the SSBs. The connection setup is done according to the settings in Annex C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.6.1.4.2 Test procedure

Prior to the start of testing, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in Table 5.7.6.1.5-1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 5.7.6.1.5-1.

2. Set the parameters according to Table 5.7.6.1.5-1.

3. After 640 ms from step 2, the UE shall start sending L1-SINR report including results of both CSI-RS#0 and CSI-RS#1.

4. The SS shall check the L1-SINR reported values of CSI-RS0 and CSI-RS1 in the periodic L1-SINR reports for the following requirements:

   - R1: The L1-SINR value of CSI-RS0 reported by the UE is compared to the expected L1-SINR value for CSI-RS0. If the value is outside the limits in Table 5.7.6.1.5-3 or the UE fails to report the measurement value for CSI-RS0, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

   - R2: The DIFF SINR value of CSI-RS1 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 5.7.6.1.5-4 or the UE fails to report the measurement value for CSI-RS1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

5.7.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.6.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and CSI-SINR Table H.3.6A-2 with conditions CSI-RS and PERIODIC Table H.3.4-1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.6.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
csi-RS-Index	0		
}			
}			
}			

5.7.6.1.5 Test requirement

Table 5.7.6.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

Each L1-SINR measurement report for each of the tests in Table 5.7.6.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 5.7.6.1.5-3 for all test configurations, and the corresponding relative accuracy requirements in Table 5.7.6.1.5-4 for all test configurations.

Table 5.7.6.1.5-1: FR2 CSI-RS based L1-SINR general test parameters

Parameter	Config	Unit	Test 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
SMTC configuration	1~2		SMTC.1
CSI-RS	1~2		CSI-RS.3.2 TDD
reportConfigType	1~2		periodic

reportQuantity-r16	1~2		cri-SINR-r16
nrofReportedRS	1~2		2
L1-RSRP reporting period	1~2		slot640
Propagation condition	1~2		AWGN
Antenna configuration	1~2		1x2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table 5.7.6.1.5-2: FR2 CSI-RS based L1-SINR OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.9	
Assumption for UE beams Note 4			Rough	
N_{oc}	1~2	dBm/15 kHz	-104.1	
N_{oc}	1~2	dBm/SSB SCS	-95.1	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-1.8
CSI-RS-RSRP Note1	1~2	dBm/SCS	-85.07	-96.87
Io Note1	1~2	dBm/95.04MHz	-55.67	-63.88
$\hat{E}_s / N_{oc}$	1~2	dB	10	-1.8
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Void. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

Table 5.7.6.1.5-3: L1-SINR absolute accuracy requirements for the reported values for the absolute accuracy rules R1

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest reported value (CSI-RS0)	53

Highest reported value (CSI-RS0)	76
Extreme Conditions	**Test 1 All bands**
Lowest reported value (CSI-RS0)	51
Highest reported value (CSI-RS0)	78

Table 5.7.6.1.5-4: Evaluation limits for the reported values for T1 and T2 relative accuracy rules R2

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest DIFF L1-SINR reported value	6
Highest DIFF L1-SINR reported value	15
Extreme Conditions	**Test 1 All bands**
Lowest DIFF L1-SINR reported value	5
Highest DIFF L1-SINR reported value	15

For the test to pass, the ratio of successful reported values for each requirement (R1 and R2) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.6.2 EN-DC FR2 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

5.7.6.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

5.7.6.2.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards, and supporting L1-SINR measurement.

5.7.6.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.6.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.6.2.

5.7.6.2.4 Test description

5.7.6.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.6.2.4.1-1. Test environment parameters are given in Table 5.7.6.2.4.1-3.

Table 5.7.6.2.4.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 5.7.6.2.4.1-2.

Table 5.7.6.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 5.7.6.2.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR2 cell. Cell 2 is the PSCell and the target for SSB-based L1-SINR measurements. The UE is configured to perform RLM, BFD and L1-SINR measurement based on the SSBs. The connection setup is done according to the settings in Annex C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.6.2.4.2 Test procedure

Prior to the start of testing, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in Table 5.7.6.2.5-1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 5.7.6.2.5-1.

2. Set the parameters according to Table 5.7.6.2.5-1.

3. After 640 ms from step 2, the UE shall start sending L1-SINR report including results of both SSB#0+CSI-RS#0 and SSB#1+CSI-RS#1.

4. The SS shall check the L1-SINR reported values of SSB#0 and SSB#1 in the periodic L1-SINR reports for the following requirements:

- R1: The L1-SINR value of SSB#0+CSI-RS#0 reported by the UE is compared to the expected L1-SINR value for SSB#0+CSI-RS#0. If the value is outside the limits in Table 5.7.6.2.5-4 or the UE fails to report the measurement value for SSB#0+CSI-RS#0, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

- R2: The DIFF L1-SINR value of SSB#1+CSI-RS#1 reported by the UE is compared to the expected DIFF L1-SINR value. If the resulting value is outside the limits in Table 5.7.6.2.5-5 or the UE fails to report the measurement value for SSB#0+CSI-RS#0 or SSB#1+CSI-RS#1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

5.7.6.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.6.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and SS-SINR and CSI-RS_IMR Table H.3.6A-2 with conditions SSB and PERIODIC Table H.3.6A-3 with conditions PERIODIC Table H.3.4-1

Table 5.7.6.2.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

5.7.6.2.5 Test requirement

Table 5.7.6.2.5-2 defines the OTA primary level settings including test tolerances for all tests.

Table 5.7.6.2.5-1: FR2 L1-SINR measurement test parameters with SSB based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1
SSB GSCN	1~4		freq1

Duplex mode	1~4		TDD
TDD Configuration	1~4		TDDConf.3.1
$BW_{channel}$	1~4	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~4		SR.3.1 TDD
RMSI CORESET Reference Channel	1~4		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~4		CCR.3.1 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
CSI-RS configuration	1~4		CSI-RS 3.1A TDD
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
SMTC configuration	1~4		SMTC.1
reportConfigType	1~4		periodic
reportQuantity-r16	1~4		ssb-Index-SINR-r16
Number of reported RS	1~4		2
L1-SINR reporting period	1~4		slot640
Propagation condition	1~4		AWGN
Antenna configuration	1~4		1x2
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 5.7.6.2.5-2: FR2 SSB specific test parameters

Parameter	Config	Unit	Test 1	
			SSB#0	SSB#1
Angle of arrival configuration			Setup 1 according to A.9.1	
Assumption for UE beams Note 4			Rough	
N_{oc}	1~4	dBm/15 kHz	-104.1	
N_{oc}	1,2	dBm/SSB SCS	-95.1	
	3,4		-92.1	
$\hat{E}_s / I_{ot}$	1~4	dB	10	1.2
SSB RSRP Note1	1,2	dBm/SCS	-85.07	-93.87
	3,4		-82.07	-90.87

Io[Note1]	1~4	dBm/ 95.04M Hz	-55.67	-62.43
$\hat{E}_s / N_{oc}$	1~4	dB	10	1.2
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

Table 5.7.6.2.5-3: FR2 CSI-RS specific test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS#0	CSI-RS#1
Angle of arrival configuration			Setup 1 according to A.9.1	
Assumption for UE beams[Note 4]			Rough	
N_{oc}	1~4	dBm/15k Hz	-104.1	
N_{oc}	1~4	dBm/CSI-RS SCS	-95.1	
$\hat{E}_s / I_{ot}$	1~4	dB	10	1.2
CSI-RS RSRP[Note1]	1~4	dBm/SCS	-85.07	-93.87
Io[Note1]	1~4	dBm/ 95.04MHz	-55.67	-62.43
$\hat{E}_s / N_{oc}$	1~4	dB	10	1.2
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

Table 5.7.6.2.5-4: L1-SINR absolute accuracy requirements for the reported values for the absolute accuracy rules R1

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest reported value (SSB#0+CSI-RS#0)	56
Highest reported value (SSB#0+CSI-RS#0)	73
Extreme Conditions	**Test 1 All bands**
Lowest reported value (SSB#0+CSI-RS#0)	54
Highest reported value (SSB#0+CSI-RS#0)	75

Table 5.7.6.2.5-5: Evaluation limits for the reported values for T1 and T2 relative accuracy rules R2

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest DIFF L1-SINR reported value	5
Highest DIFF L1-SINR reported value	12
Extreme Conditions	**Test 1 All bands**
Lowest DIFF L1-SINR reported value	4
Highest DIFF L1-SINR reported value	13

For the test to pass, the ratio of successful reported values for each requirement (R1 and R2) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.6.3 EN-DC FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

5.7.6.3.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

5.7.6.3.2 Test applicability

This test applies to all types of NR UE supporting E-UTRA and EN-DC from Release 16 onwards, and supporting L1-SINR measurement.

5.7.6.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.6.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.6.3.

5.7.6.3.4 Test description

5.7.6.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.6.3.4.1-1.

Table 5.7.6.3.4.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

2	LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 5.7.6.3.4.1-2.

Table 5.7.6.3.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 5.7.6.3.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is the NR FR2 cell. Cell 2 is the PSCell and the target for CSI-RS-based L1-SINR measurements. The UE is configured to perform RLM, BFD and L1-SINR measurement based on the SSBs. The connection setup is done according to the settings in Annex C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.6.3.4.2 Test procedure

Prior to the start of testing, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in Table 5.7.6.3.5-1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 5.7.6.3.5-1.

2. Set the parameters according to T1 in Table 5.7.6.3.5-1.

3. After 640 ms from step 2, the UE shall start sending L1-SINR report including results of both CSI-RS#0+CSI-IM#0 and CSI-RS#1+CSI-IM#1.

4. The SS shall check the L1-SINR reported values of CSI-RS#0+CSI-IM#0 and CSI-RS#1+CSI-IM#1 in the periodic L1-SINR reports for the following requirements:

   - R1: The L1-SINR value of CSI-RS#0+CSI-IM#0 reported by the UE is compared to the expected L1-SINR value for CSI-RS#0+CSI-IM#0. If the value is outside the limits in Table 5.7.6.3.5-3 or the UE fails to report the measurement value for CSI-RS#0+CSI-IM#0, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

   - R2: The DIFF L1-SINR value of CSI-RS#1+CSI-IM#1 reported by the expected DIFF L1-SINR. If the resulting value is outside the limits in Table 5.7.6.3.5-4 or the UE fails to report the measurement value for CSI-RS#1+CSI-IM#1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

5.7.6.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.6.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and CSI-SINR Table H.3.6A-2 with conditions CSI-RS and PERIODIC Table H.3.6A-4 with conditions APERIODIC Table H.3.4-1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.6.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
csi-RS-Index	0		
}			
}			
}			

5.7.6.3.5 Test requirement

Table 5.7.6.3.5-2 defines the OTA primary level settings including test tolerances for all tests.

Each L1-SINR measurement report for each of the tests in Table 5.7.6.3.5-1 shall meet the corresponding absolute accuracy requirements in Table 5.7.6.3.5-3 for all test configurations, and the corresponding relative accuracy requirements in Table 5.7.6.1.5-4 for all test configurations.

Table 5.7.6.3.5-1: FR2 L1-SINR measurement test with CSI-RS based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
TRS Configuration	1~2		TRS.2.1 TDD

PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
SMTC configuration	1~2		SMTC.1
CSI-RS configuration as CMR	1~2		CSI-RS.3.2 TDD
CSI-IM configuration as IMR	1~2		CSI-IM.3.3 TDD
reportConfigType	1~2		periodic
reportQuantity-r16	1~2		cri-SINR-r16
nrofReportedRS	1~2		2
L1-RSRP reporting period	1~2		slot640
Propagation condition	1~2		AWGN
Antenna configutaion	1~2		1x2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table 5.7.6.3.5-2: FR2 CSI-RS based L1-SINR OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.9.1	
Assumption for UE beams Note 4			Rough	
N_{oc}	1~2	dBm/15 kHz	-104.1	
N_{oc}	1~2	dBm/SSB SCS	-95.1	
$\hat{E}_s/I_{ot}$	1~2	dB	10	-1.8
CSI-RS-RSRP Note1	1~2	dBm/SCS	-85.07	-96.87
Io Note1	1~2	dBm/95.04MHz	-55.67	-63.88
$\hat{E}_s/N_{oc}$	1~2	dB	10	-1.8
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

Table 5.7.6.3.5-3: L1-SINR absolute accuracy requirements for the reported values for the absolute accuracy rules R1

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest reported value (CSI-RS0)	55
Highest reported value (CSI-RS0)	74
Extreme Conditions	**Test 1 All bands**
Lowest reported value (CSI-RS0)	53
Highest reported value (CSI-RS0)	76

Table 5.7.6.3.5-4: Evaluation limits for the reported values for T1 and T2 relative accuracy rules R2

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest DIFF L1-SINR reported value	7
Highest DIFF L1-SINR reported value	15
Extreme Conditions	**Test 1 All bands**
Lowest DIFF L1-SINR reported value	6
Highest DIFF L1-SINR reported value	15

For the test to pass, the ratio of successful reported values for each requirement (R1 and R2) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.7 CSI-RSRP

5.7.7.0 Minimum conformance requirements

5.7.7.0.1 Intra-frequency CSI-RSRP measurement accuracy requirements

5.7.7.0.1.1 Absolute CSI-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell where the CSI-RS resources to be measured have the same center frequency as the CSI-RS resources indicated for measurement in the serving cell in FR2.

The accuracy requirements in Table 5.7.7.0.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB(s).

- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS to be measured.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.7.0.1.1-1.

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 5.7.7.0.1.1-1: CSI-RSRP Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz		
±6	±9	≥-6	Same value as CSI-RS_RP in Table B.2.8-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±8	±11		N/A		-70	-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

5.7.7.0.1.2 Relative SS-RSRP Accuracy

The relative accuracy of CSI-RSRP is defined as the CSI-RSRP measured from one cell compared to the CSI-RSRP measured from another cell on the same center frequency, or between any two CSI-RSRP levels measured on the same cell in FR2.

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB(s).

- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each CSI-RS to be measured.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.7.0.1.2-1.

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 5.7.7.0.1.2-1: CSI-RSRP Intra frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
			dBm / SCS CSI-RS Note 1		
dB	dB	dB	SCS CSI-RS = 60kHz	SCS CSI-RS = 120kHz	dBm/BW Channel
±6	±9	≥-6	Same value as CSI-RS_RP in Table B.2.8-2, according to UE Power class, operating band and angle of arrival		-50

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.

The reporting range for CSI-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.3.3 and 10.1.6.

5.7.7.0.2 Inter-frequency CSI-RSRP measurement accuracy requirements

5.7.7.0.2.1 Absolute CSI-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell on a frequency in FR2 where the CSI-RS resources to be measured have the different center frequency as the CSI-RS resources indicated for measurement in the serving cell.

The accuracy requirements in Table 5.7.7.0.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.7.0.2.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 5.7.7.0.2.1-1: CSI-RSRP Inter frequency absolute accuracy in FR2

Accuracy	Conditions

Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range			
			Minimum Io			Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz		
±6	±9	≥-4	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±8	±11		N/A		-70	-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.5.3 and 10.1.6.

5.7.7.0.2.2 Relative SS-RSRP Accuracy

The relative accuracy of CSI-RSRP in inter frequency case is defined as the CSI-RSRP measured from one cell on a frequency in FR2 compared to the CSI-RSRP measured from another cell on another frequency in FR2.

The accuracy requirements in Table 5.7.7.0.2.2-1 are valid under the following conditions:

- Conditions defined in 38.101-2 [19] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.7.0.2.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- $|CSI_RP1_{dBm} - CSI_RP2_{dBm}| \leq 27dB$
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 5.7.7.0.2.2-1: CSI-RSRP Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±6	±9	≥-4	Same value as CSI_RP in Table B.2.9-2, according to		-50

			UE Power class, operating band and angle of arrival	
Note 1:	Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.			
Note 2:	Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.			
Note 3:	In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.			
Note 4:	The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.			

The reporting range for CSI-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.5.3 and 10.1.6.

5.7.7.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

Editor's Note: This test case is complete for the following configurations:- UE power class 3

- Test frequency f < 40.8 GHz
- Normal Condition

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

This test case is incomplete for extreme condition

5.7.7.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency CSI-RS based RSRP measurement accuracy for NR FR2 is within the specified limits for all bands.

5.7.7.1.2 Test applicability

This test applies to all types of NR UE release 16 forward supporting NR EN-DC and CSI-RS based RSRP and RSRQ measurement.

5.7.7.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.7.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.7.1.

5.7.7.1.4 Test description

Three cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell, Cell 2 is the NR FR2 PSCell and Cell 3 is the NR FR2 neighbour cell on the same frequency as the PSCell.

5.7.7.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.7.1.4.1-1.

Table 5.7.7.1.4.1-1: Supported test configurations

Configuration	Description
5.7.7.1-1	NR 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
5.7.7.1-2	NR 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD

Note: The UE is only required to pass in one of the supported test configurations

Configure the test equipment and the DUT according to the parameters in Table 5.7.7.1.4.1-2.

Table 5.7.7.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 5.7.7.1.4.3.

2. There are two carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier, Cell 2 is the NR PSCell on the NR FR2 carrier and Cell 3 is the neighbour cell on the same NR FR2 carrier. Cell 3 is the target for the CSI-RSRP measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.7.1.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

2. Set the parameters according to Table 5.7.7.1.5-1 as appropriate.

3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the CSI-RS reported values in the periodic MeasurementReport for the following requirements:

   - R1: The CSI-RS value of Cell 2 reported by the UE is compared to the expected CSI-RS for Cell 2. If the value is outside the limits in Table 5.7.7.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

   - R2: The CSI-RS value of Cell 3 reported by the UE is compared to the expected CSI-RS for Cell 3. If the value is outside the limits in Table 5.7.7.1.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   - R3: The CSI-RS value of Cell 3 reported by the UE is compared to the reported CSI-RS of Cell 2. If the resulting value is outside the limits in Table 5.7.7.1.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G for each of the requirements is achieved. The evaluation of a specific requirement is concluded when the confidence level for that requirement is reached, even if more measurement reports are required for the remaining requirements.

7a The SS shall check all the CSI-RS reported values during Test 1 for the following requirements:

- R9: The maximum CSI-RS value is compared to the minimum CSI-RS of Cell 2 reported by the UE. If the difference exceeds the limits in Table 5.7.7.1.5-3a count a fail for R9. Otherwise, R9 is passed.

- R10: The maximum CSI-RS value is compared to the minimum CSI-RS of Cell 3 reported by the UE. If the difference exceeds the limits in Table 5.7.7.1.5-3a count a fail for R10. Otherwise, R10 is passed.

8. Set the parameters according to Test 2 in Table 5.7.7.1.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements:

- R4: The CSI-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP for Cell 2. If the value is outside the limits in Table 5.7.7.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

- R5: The CSI-RSRP value of Cell 3 reported by the UE is compared to the expected CSI-RSRP for Cell 3. If the value is outside the limits in Table 5.7.7.1.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R5 is increased by one. Otherwise, the number of passed iterations for R5 is increased by one.

- R6: The CSI-RSRP value of Cell 3 reported by the UE is compared to the reported SS-RSRP of Cell 2. If the resulting value is outside the limits in Table 5.7.7.1.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed iterations for R6 is increased by one. Otherwise, the number of passed iterations for R6 is increased by one.

- R7: The CSI-RSRP value of Cell 2 reported by the UE during Test 2 is compared to the reported CSI-RSRP of Cell 2 during Test 1 for the same iteration. If the resulting value is outside the limits in Table 5.7.7.1.5-5 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R7 is increased by one. Otherwise, the number of passed iterations for R7 is increased by one

- R8: The CSI-RSRP value of Cell 3 reported by the UE during Test 2 is compared to the reported CSI-RSRP of Cell 3 during Test 1 for the same iteration. If the resulting value is outside the limits in Table 5.7.7.1.5-5 or the UE fails to report the measurement value for Cell 3, the number of failed iterations for R8 is increased by one. Otherwise, the number of passed iterations for R8 is increased by one

8a The SS shall check all the CSI-RSRP reported values during Test 2 for the following requirements:

- R11: The maximum CSI-RSRP value is compared to the minimum CSI-RSRP of Cell 2 reported by the UE. If the difference exceeds the limits in Table 5.7.7.1.5-3a count a fail for R11. Otherwise, R11 is passed.

- R12: The maximum CSI-RSRP value is compared to the minimum CSI-RSRP of Cell 3 reported by the UE. If the difference exceeds the limits in Table 5.7.7.1.5-3a count a fail for R12. Otherwise, R12 is passed.

9. If more measurement reports with Test 1 configuration are needed in order to complete the evaluation R7 or R8, the SS shall set the parameters according to Table 5.7.7.1.5-2 as appropriate and repeat steps 5 to 8, evaluating R7 and / or R8 as appropriate.

5.7.7.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.7.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.7.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
maxReportCells	2		
}			
}			
}			

5.7.7.1.5 Test requirement

Table 5.7.7.1.5-1 defines the cell specific settings for all tests. Table 5.7.7.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

The CSI-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clause 5.7.7.0.1.1 and relative accuracy requirements in clause 5.7.7.0.1.2. The following eight requirements are to be verified:

During T1:

R1: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in Table 5.7.7.1.5-3.

R2: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in Table 5.7.7.1.5-3.

R3: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 5.7.7.1.5-4.

R9: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum CSI-RSRP report does not exceed the limit in Table 5.7.7.1.5-3a.

R10: Δ(Max-Min) accuracy of Cell 3. The UE is deemed to meet the requirement if the difference between the maximum and the minimum CSI-RSRP report does not exceed the limit in Table 5.7.7.1.5-3a.

During T2:

R4: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table 5.7.7.1.5-3 and Table 5.7.7.1.5-3a.

R5: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table 5.7.7.1.5-3 and Table 5.7.7.1.5-3a.

R6: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 5.7.7.1.5-4.

R11: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum CSI-RSRP report does not exceed the limit in Table 5.7.7.1.5-3a.

R12: Δ(Max-Min) accuracy of Cell 3. The UE is deemed to meet the requirement if the difference between the maximum and the minimum CSI-RSRP report does not exceed the limit in Table 5.7.7.1.5-3a.

During T1 and T2:

R7: Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 5.7.7.1.5-5.

R8: Relative accuracy of Cell 3 during T2 compared with Cell 3 during T1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 5.7.7.1.5-5.

Table 5.7.7.1.5-1: CSI-RSRP Intra frequency general test parameters

Parameter[Note 5]	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD	CSI-RS.RRM.FR2.1 TDD	CSI-RS.RRM.FR2.1 TDD	CSI-RS.RRM.FR2.1 TDD
Time offset with Cell 2	µs	-	0.58	-	0.58
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS[Note 1]					
EPRE ratio of OCNG to OCNG DMRS [Note 1]					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: All parameters apply for configuration 1 and 2
Note 6: Void

Table 5.7.7.1.5-2: CSI-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams[Note 8]		Rough			
N_{oc} [Note1]	dBm/15kHz[Note4]	-97.4		N/A	

N_{oc} Note1	dBm/SCS Note4	-88.4		N/A	
$\hat{E}_s/N_{oc}$ for SSB	dB	6.0	1.4	N/A	N/A
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	6.0	1.4	N/A	N/A
E_s	dBm/SCS Note4	N/A	N/A	(Table B.2.2-2 Rx Beam Peak +9.8dB)	(Table B.2.2-2 Rx Beam Peak +9.8dB)
SSB_RP Note2	dBm/SCS	-82.37	-86.97	(Table B.2.2-2 Rx Beam Peak +9.8dB)	(Table B.2.2-2 Rx Beam Peak +9.8dB)
$\hat{E}_s/I_{ot\ BB}$ Note6 for SSB	dB	2.20	-5.59	-1.77	-1.77
$\hat{E}_s/I_{ot\ BB}$ Note6 for CSI-RS	dB	2.20	-5.59	-1.77	-1.77
CSI_RP	dBm/SCS	-82.37	-86.97	(Table B.2.2-2 Rx Beam Peak +9.8dB)	(Table B.2.2-2 Rx Beam Peak +9.8dB)
Io Note2	dBm/95.04 MHz Note4	-56.53		(Table B.2.2-2 Rx Beam Peak +37.40dB)	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the center of the quiet zone
Note 5: Void
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7: All parameters apply for configurations 1 and 2
Note 8: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 5.7.7.1.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	50	n257, n258, n261	31
		n260	33
		n259	FFS
Highest reported value (Cell 2)	108	n257, n258, n261	88
		n260	90
		n259	FFS
Lowest reported value (Cell 3)	46	n257, n258, n261	31
		n260	33
		n259	FFS
Highest reported value (Cell 3)	103	n257, n258, n261	88

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
		n260	90
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	47+ FFS	n257, n258, n261	28 + FFS
		n260	30 + FFS
		n259	FFS
Highest reported value (Cell 2)	111+ FFS	n257, n258, n261	91 + FFS
		n260	93 + FFS
		n259	FFS
Lowest reported value (Cell 3)	46+ FFS	n257, n258, n261	28+ FFS
		n260	30+ FFS
		n259	FFS
Highest reported value (Cell 3)	106+ FFS	n257, n258, n261	91+ FFS
		n260	93+ FFS
		n259	FFS

Table 5.7.7.1.5-3a: evaluation limits for the Δ(Max-Min) reported values for each cell during each time period

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 2	8	8
Δ(Max-Min) reported value Cell 3	8	8
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 2	16 + FFS	16+ FFS
Δ(Max-Min) reported value Cell 3	16 + FFS	16 + FFS

Table 5.7.7.1.5-4: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 3)	RSRP_x - 12	RSRP_x - 6
Highest reported value (Cell 3)	RSRP_x + 2	RSRP_x + 6
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 3)	RSRP_x - 15+ FFS	RSRP_x - 9+ FFS
Highest reported value (Cell 3)	RSRP_x + 5+ FFS	RSRP_x + 9+ FFS
RSRP_x is the reported value of Cell 2		

Table 5.7.7.1.5-5: evaluation limits for the reported values for T2 with respect to T1 relative accuracy rules R7, R8

UE power class 3			
Test 2	**Bands**	**Normal Conditions**	**Extreme Conditions**
Lowest reported value (Cell 2)	n257, n258, n261	RSRP_x - 28	RSRP_x - 31+ FFS
	n260	RSRP_x - 26	RSRP_x - 29+ FFS
	n259	FFS	FFS
Highest reported value (Cell 2)	n257, n258, n261	RSRP_x - 12	RSRP_x - 9+ FFS
	n260	RSRP_x - 10	RSRP_x - 7+ FFS
	n259	FFS	FFS

Lowest reported value (Cell 3)	n257, n258, n261	RSRP_y - 24	RSRP_y - 27+ FFS
	n260	RSRP_y - 21	RSRP_y - 24+ FFS
	n259	FFS	FFS
Highest reported value (Cell 3)	n257, n258, n261	RSRP_y - 8	RSRP_y - 5+ FFS
	n260	RSRP_y - 5	RSRP_y - 2+ FFS
	n259	FFS	FFS
RSRP_x is the reported value of Cell 2 during T1 RSRP_y is the reported value of Cell 3 during T1			

For the test to pass, the ratio of successful reported values for each requirement (R1 to R8) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.7.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

Editor's Note: This test case is complete for the following configurations:

- UE power class 3
- Test frequency f < 40.8 GHz
- Normal Condition

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

This test caes is incomplete for extreme conditions.

5.7.7.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency CSI-RS based RSRP measurement accuracy for NR FR2 is within the specified limits for all bands.

5.7.7.2.2 Test applicability

This test applies to all types of NR UE release 16 forward supporting NR EN-DC and CSI-RS based RSRP measurement.

5.7.7.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 5.7.7.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.5.7.7.2.

5.7.7.2.4 Test description

Three cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell, Cell 2 is the NR FR2 PSCell and Cell 3 is the NR FR2 neighbour cell on a different NR FR2 frequency.

5.7.7.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 5.7.7.2.4.1-1.

Table 5.7.7.2.4.1-1: Supported test configurations

Configuration	Description
5.7.7.2-1	NR 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
5.7.7.2-2	NR 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to pass in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 5.7.7.2.4.1-2.

Table 5.7.7.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 5.7.7.2.4.3.

2. There are three carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier, Cell 2 is the NR PSCell on one of the NR FR2 carriers and Cell 3 is the neighbour cell on the other NR FR2 carrier. Cell 3 is the target for the SS-RSRP measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

3. The UE RX beam peak and directions in which the UE meets the EIS spherical coverage criteria have been found with one of the procedures from Annex I.

5.7.7.2.4.2 Test procedure

1. Configure the positioning system for a valid test point as defined in A.9.4. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 5.7.7.2.5-1 as appropriate.

3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the CSI-RSRP reported values in the periodic MeasurementReport for the following requirements:

   - R1: The CSI-RSRP value of Cell 2 reported by the UE is compared to the expected CSI-RSRP for Cell 2. If the value is outside the limits in Table 5.7.7.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed samples for R1 is increased by one. Otherwise, the number of passed samples for R1 is increased by one.

   - R2: The CSI-RSRP value of Cell 3 reported by the UE is compared to the expected CSI-RSRP for Cell 3. If the value is outside the limits in Table 5.7.7.2.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed samples for R2 is increased by one. Otherwise, the number of passed samples for R2 is increased by one.

   - R3: The CSI-RSRP value of Cell 3 reported by the UE is compared to the reported CSI-RSRP of Cell 2. If the resulting value is outside the limits in Table 5.7.7.2.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed samples for R3 is increased by one. Otherwise, the number of passed samples for R3 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G for each of the requirements is achieved. The evaluation of a specific requirement is concluded when the confidence level for that requirement is reached, even if more measurement reports are required for the remaining requirements.

7a. The SS shall check all the CSI-RSRP reported values during Test 1 for the following requirements:

- R7: The maximum CSI-RSRP value is compared to the minimum CSI-RSRP of Cell 2 reported by the UE. If the difference exceeds the limits in Table 5.7.7.2.5-3a count a fail for R7. Otherwise, R7 is passed.

- R8: The maximum CSI-RSRP value is compared to the minimum CSI-RSRP of Cell 3 reported by the UE. If the difference exceeds the limits in Table 5.7.7.2.5-3a count a fail for R8. Otherwise, R8 is passed.

8. The SS shall select a new test point as defined in A.9.4 and rotate the positioning system for the selected test point.

9. Set the parameters according to Test 2 in Table 5.7.7.2.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements:

- R4: The CSI-RSRP value of Cell 2 reported by the UE is compared to the expected CSI-RSRP for Cell 2. If the value is outside the limits in Table 5.7.7.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed samples for R4 is increased by one. Otherwise, the number of passed samples for R4 is increased by one.

- R5: The CSI-RSRP value of Cell 3 reported by the UE is compared to the expected CSI-RSRP for Cell 3. If the value is outside the limits in Table 5.7.7.2.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed samples for R5 is increased by one. Otherwise, the number of passed samples for R5 is increased by one.

- R6: The CSI-RSRP value of Cell 3 reported by the UE is compared to the reported CSI-RSRP of Cell 2. If the resulting value is outside the limits in Table 5.7.7.2.5-4 or the UE fails to report the measurement value for Cell 2 or Cell 3, the number of failed samples for R6 is increased by one. Otherwise, the number of passed samples for R6 is increased by one.

10. The SS shall check all the CSI-RSRP reported values during Test 1 for the following requirements:

- R9: The maximum CSI-RSRP value is compared to the minimum CSI-RSRP of Cell 2 reported by the UE. If the difference exceeds the limits in Table 5.7.7.2.5-3a count a fail for R9. Otherwise, R9 is passed.

- R10: The maximum CSI-RSRP value is compared to the minimum CSI-RSRP of Cell 3 reported by the UE. If the difference exceeds the limits in Table 5.7.7.2.5-3a count a fail for R10. Otherwise, R10 is passed.

5.7.7.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 5.7.7.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, Synchronous cells, CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ, CSI-RS MOBILITY Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 5.7.7.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			

periodical SEQUENCE {			PERIODICAL
rsType	csirs		
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

5.7.7.2.5 Test requirement

Table 5.7.7.2.5-1 defines the cell specific settings for all tests. Table 5.7.7.2.5-2 defines the OTA primary level settings including test tolerances for all tests.

The CSI-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clause 5.7.7.0.2.1 and relative accuracy requirements in clause 5.7.7.0.2.2. The following eight requirements are to be verified:

During T1:

R1: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in Table 5.7.7.2.5-3 for test configuration 1 and in Table 5.7.7.2.5-4 for test configuration 2.

R2: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in Table 5.7.7.2.5-3 for test configuration 1 and in Table 5.7.7.2.5-4 for test configuration 2 and Table 5.7.7.2.5-3a for both configurations.

R3: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 5.7.7.2.5-5.

R7: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum CSI-RSRP report does not exceed the limit in Table 5.7.7.2.5-3a.

R8: Δ(Max-Min) accuracy of Cell 3. The UE is deemed to meet the requirement if the difference between the maximum and the minimum CSI-RSRP report does not exceed the limit in Table 5.7.7.2.5-3a.During T2:

R4: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table 5.7.7.2.5-3 for test configuration 1 and in Table 5.7.7.2.5-4 for test configuration 2.

R5: Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table 5.7.7.2.5-3 for test configuration 1 and in Table 5.7.7.2.5-4 for test configuration 2 and Table 5.7.7.2.5-3a for both configurations.

R6: Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 5.7.7.2.5-5.

R9: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum CSI-RSRP report does not exceed the limit in Table 5.7.7.2.5-3a.

R10: Δ(Max-Min) accuracy of Cell 3. The UE is deemed to meet the requirement if the difference between the maximum and the minimum CSI-RSRP report does not exceed the limit in Table 5.7.7.2.5-3a.

Table 5.7.7.2.5-1: CSI-RSRP inter-frequency general test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0
SSB ARFCN	1,2		freq1	freq2	freq1	freq2
$BW_{channel}$	1,2		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Gap pattern ID			0		0	
Duplex mode	1,2		TDD	TDD	TDD	TDD
TDD configuration	1,2		TDDConf.3.1		TDDConf.3.1	

PDSCH Reference measurement channel	1,2		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD	-	CCR.3.1 TDD	-
SSB configuration	1,2		SSB.3 FR2		SSB.3 FR2	
OCNG Patterns	1,2		OP.3		OP.3	
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1,2		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1,2		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1,2		TCI.State.2		TCI.State.2	
SMTC configuration	1,2		SMTC.1		SMTC.1	
CSI-RS configuration for RRM	1,2		CSI-RS.RRM.3.1 TDD	CSI-RS.RRM.3.2 TDD	CSI-RS.RRM.3.1 TDD	CSI-RS.RRM.3.2 TDD
Time offset between Cell 2 and Cell 3	1,2	µs	0.58		0.58	
EPRE ratio of PSS to SSS	1,2	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition	1,2	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration	1,2	-	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void						

Table 5.7.7.2.5-2: CSI-RSRP inter-frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
		AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams Note 7		Rough	Rough	Assumption for UE beams Note 7	
N_{oc} Note1	dBm/15kHz Note4	-96.3	-96.3	(Table B.2.3-2 Rx Beam Peak +3.97dB)	(Table B.2.3-2 Rx Beam Peak - 1.03dB)
N_{oc} Note1	dBm/SCS Note4	-87.3	-87.3	(Table B.2.3-2 Rx Beam	(Table B.2.3-2 Rx Beam

				Peak +13.0dB)	Peak +8.0dB)
$\hat{E}_s/N_{oc}$ for SSB	dB	6.0	6.0	17.0	-1.0
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	6.0	6.0	17.0	-1.0
SSB_RP Note2	dBm/SCS	-81.27	-81.27	(Table B.2.3-2 Rx Beam Peak +30.0dB)	(Table B.2. 3-2 Rx Beam Peak +7.0dB)
($SSB_RP_{Cell\ 1}$ – $SSB_RP_{Cell\ 2}$)	dB	0		9.00	
$\hat{E}_s/I_{ot\ BB}$ Note6 for SSB	dB	5.23	5.93	5.38	-1.46
$\hat{E}_s/I_{ot\ BB}$ Note6 for CSI-RS	dB	5.23	5.93	5.38	-1.46
CSI_RP	dBm/SCS	-88.7	-103.10	(Table B.2.2-2 Rx Beam Peak +4.1dB)	(Table B.2.2-2 Rx Beam Peak +4.1dB)
Io Note2	dBm/95.04 MHz Note4	-56.49	-56.49	(Table B.2.3-2 Rx Beam Peak +54.68dB)	(Table B.2.3-2 Rx Beam Peak +35.13dB)
($Io_{freq\ 1}$ – $Io_{freq\ 2}$)	dB	0		7.6	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP, Es/Iot, Io, ($SSB_RP_{Cell\ 2}$ – $SSB_RP_{Cell\ 1}$) and ($Io_{freq\ 2}$ – $Io_{freq\ 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P or ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 5.7.7.2.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5 for test configuration 1

UE power class 3				
Normal Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 2)	n257, n258, n261	41	n257, n258, n261	33
	n260	39	n260	34
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	All bands: 109		n257, n258, n261	101
			n260	104
			n259	FFS
Lowest reported value (Cell 3)	All bands: 52		n257, n258, n261	32
			n260	34
			n259	FFS
Highest reported value (Cell 3)	All bands: 109		n257, n258, n261	87

			n260	90
			n259	FFS
Extreme Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 2)	n257, n258, n261	41 + FFS	n257, n258, n261	33 + FFS
	n260	39 + FFS	n260	34 + FFS
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	All bands: 109 + FFS		n257, n258, n261	101 + FFS
			n260	104 + FFS
			n259	FFS
Lowest reported value (Cell 3)	All bands: 52 + FFS		n257, n258, n261	32+ FFS
			n260	34+ FFS
			n259	FFS
Highest reported value (Cell 3)	All bands: 109 + FFS		n257, n258, n261	87+ FFS
			n260	91+ FFS
			n259	FFS

Table 5.7.7.2.5-3a: evaluation limits for the ∆(Max-Min) reportedabsolute values for cell 3 during each time period

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
∆(Max-Min) reported value Cell 3	8	8
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
∆(Max-Min) reported value Cell 3	8	8

Table 5.7.7.2.5-4: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5 for test configuration 2

UE power class 3				
Normal Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 2)	n257, n258, n261	41	n257, n258, n261	36
	n260	39	n260	37
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	All bands: 109		n257, n258, n261	104
			n260	107
			n259	FFS
Lowest reported value (Cell 3)	All bands: 52		n257, n258, n261	35
			n260	37
			n259	FFS
Highest reported value (Cell 3)	All bands: 109		n257, n258, n261	90
			n260	93
			n259	FFS
Extreme Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 2)	n257, n258, n261	41 + FFS	n257, n258, n261	28 + FFS
	n260	39 + FFS	n260	30 + FFS
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	All bands: 109 + FFS		n257, n258, n261	91 + FFS
			n260	93 + FFS
			n259	FFS
Lowest reported value (Cell 3)	All bands: 52 + FFS		n257, n258, n261	28+ FFS
			n260	30+ FFS
			n259	FFS
Highest reported value (Cell 3)	All bands: 109 + FFS		n257, n258, n261	91+ FFS
			n260	93+ FFS
			n259	FFS

Table 5.7.7.2.5-5: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 3				
Normal Conditions	**Test 1**		**Test 2 All bands**	
Lowest value (RSRP report Cell 3 – RSRP report Cell 2)	All bands: -23		-37	
Highest value (RSRP report Cell 3 – RSRP report Cell 2)	n257, n258, n261	+31	n257, n258, n261	+17
	n260	+32	n260	+19
	n259	FFS	n259	FFS
Extreme Conditions	**Test 1**		**Test 2 All bands**	
Lowest value (RSRP report Cell 3 – RSRP report Cell 2)	-23 + FFS		-37+ FFS	
Highest value (RSRP report Cell 3 – RSRP report Cell 2)	n257, n258, n261	+26 + FFS	n257, n258, n261	+17 + FFS
	n260	+27+ FFS	n260	+19 + FFS
	n259	FFS	n259	FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 to R6) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

5.7.8 CSI-RSRQ

5.7.8.0 Minimum conformance requirements

5.7.8.0.1 Intra-frequency CSI-RSRQ accuracy requirements

[TS 38.133, Clause 10.1.8.2 and Clause 10.1.11]

5.7.8.0.1.1 Absolute CSI-RSRQ accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the intra-frequency measurement defined in 9.10.2.1 in FR2 in TS 38.133 [6].

The accuracy requirements in Table 5.7.8.0.1.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 in TS 38.133 [6] for a corresponding Band for each relevant SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.12 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.8.0.1.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in Clause 7.3.4 of TS 38.101-2 [3].

Table 5.7.8.0.1.1-1: CSI-RSRQ Intra frequency absolute accuracy in FR2

Accuracy		**Conditions**	
Normal condition	**Extreme condition**	**CSI-RS Ês/Iot**	**Io [Note 2] range**

			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±2.5	±4	≥-3	Same value as CSI_RP in Table B.2.8-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-6			

Note 1: Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

The reporting range of CSI-RSRQ measurement is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 5.7.8.0.1.1-2. The range in the signaling may be larger than the guaranteed accuracy range.

Table 5.7.8.0.1.1-2: CSI-RSRQ measurement report mapping

Reported value	Measured quantity value	Unit
CSI-RSRQ_0	CSI-RSRQ<-43	dB
CSI-RSRQ_1	-43≤ CSI-RSRQ<-42.5	dB
CSI-RSRQ_2	-42.5≤ CSI-RSRQ<-42	dB
CSI-RSRQ_3	-42≤ CSI-RSRQ<-41.5	dB
CSI-RSRQ_4	-41.5≤ CSI-RSRQ<-41	dB
..	..	…
CSI-RSRQ_122	17.5≤ CSI-RSRQ<18	dB
CSI-RSRQ_123	18≤ CSI-RSRQ<18.5	dB
CSI-RSRQ_124	18.5≤ CSI-RSRQ<19	dB
CSI-RSRQ_125	19≤ CSI-RSRQ<19.5	dB
CSI-RSRQ_126	19.5≤ CSI-RSRQ<20	dB
CSI-RSRQ_127	20 ≤ CSI-RSRQ	dB

5.7.8.0.2 Inter-frequency CSI-RSRQ accuracy requirements

[TS 38.133, Clause 10.1.10.2 and Clause 10.1.11]

5.7.8.0.2.1 Absolute CSI-RSRQ accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply the inter-frequency measurement defined in 9.10.3.1 in FR2 in TS 38.133 [6].

The accuracy requirements in Table 5.7.8.0.2.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 in TS 38.133 [6] for a corresponding Band for associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

- The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.8.0.2.1-1.

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 5.7.8.0.2.1-1: CSI-RSRQ Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±2.5	±4	≥-3	Same value as CSI_RP in Table B.2.9-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-4			

Note 1: Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

The reporting range of CSI-RSRQ measurement is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 5.7.8.0.2.1-2. The range in the signaling may be larger than the guaranteed accuracy range.

Table 5.7.8.0.2.1-2: CSI-RSRQ measurement report mapping

Reported value	Measured quantity value	Unit
CSI-RSRQ_0	CSI-RSRQ<-43	dB
CSI-RSRQ_1	-43≤ CSI-RSRQ<-42.5	dB
CSI-RSRQ_2	-42.5≤ CSI-RSRQ<-42	dB
CSI-RSRQ_3	-42≤ CSI-RSRQ<-41.5	dB
CSI-RSRQ_4	-41.5≤ CSI-RSRQ<-41	dB
..	..	…
CSI-RSRQ_122	17.5≤ CSI-RSRQ<18	dB
CSI-RSRQ_123	18≤ CSI-RSRQ<18.5	dB
CSI-RSRQ_124	18.5≤ CSI-RSRQ<19	dB
CSI-RSRQ_125	19≤ CSI-RSRQ<19.5	dB
CSI-RSRQ_126	19.5≤ CSI-RSRQ<20	dB
CSI-RSRQ_127	20 ≤ CSI-RSRQ	dB

5.7.8.0.2.2 Relative CSI-RSRQ accuracy

The relative accuracy of CSI-RSRQ is defined as the CSI-RSRQ measured from one cell compared to the CSI-RSRQ measured from another cell with the same center frequency, or between any two CSI-RSRQ levels measured on the same cell in FR2.

The accuracy requirements in Table 5.7.8.0.2.2-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 in TS 38.133 [6] for a corresponding Band for the associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.8.0.2.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 5.7.8.0.2.2-1: CSI-RSRQ Inter frequency relative accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1	$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz / SCS_{CSI-RS} = 120kHz	
±3	±4	≥-3	Same value as CSI_RP in Table B.2.9-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival	-50
±4	±4	≥-4		

Note 1: Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.
Note 4: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

5.7.8.1 EN-DC intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

5.7.8.1.1 Test purpose

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.8 in TS 38.133 [6] for inter-frequency measurement.

5.7.8.1.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting CSI-RS based RSRP and RSRQ measurements.

5.7.8.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 5.7.8.0.1.

The normative reference for this requirement is in TS 38.133 [6] A.5.7.8.1.

5.7.8.1.4 Test description

Three cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell, Cell 2 is the NR FR2 PSCell and Cell 3 is the NR FR2 neighbour cell on the same frequency as the PSCell.

5.7.8.1.4.1 Initial conditions

Supported test configuration are shown in Table 5.7.8.1.4.1-1.

Table 5.7.8.1.4.1-1: CSI-RSRQ intra frequency CSI-RSRQ supported test configurations

Config	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 5.7.8.1.4.1-2.

Table 5.7.8.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] Clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] Clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in Clause 5.7.8.1.4.3.
2. There are two carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier, Cell 2 is the NR PSCell on the NR FR2 carrier and Cell 3 is the neighbour cell on the same NR FR2 carrier. Cell 3 is the target for the CSI-RSRQ measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] Clause C.1.0 and C.1.1.
3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.8.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 5.7.8.1.5-1 and Table 5.7.8.1.5-2 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the CSI-RSRQ reported values in the periodic MeasurementReport. The CSI-RSRQ value of Cell 3 reported by the UE is compared to the expected CSI-RSRQ. If the value is outside the limits (determined by Table 5.7.8.0.1.1-1 and Table 5.7.8.0.1.1-2) or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 5.7.8.1.5-1 and Table 5.7.8.1.5-2 as appropriate and repeat steps 5-7.

5.7.8.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 5.7.8.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition CSI-RS MOBILITY and RSRQ Table H.3.4-1a Table H.3.4-2

Table 5.7.8.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
maxReportCells	2		
}			
}			
}			

5.7.8.1.5 Test Requirements

The absolute accuracy of CSI-RSRQ intra-frequency measurement is test by using the parameters in Table 5.7.8.1.5-1. The CSI-RSRQ intra frequency OTA related test parameters are provided in Table 5.7.8.1.5-2.

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ +2.5dB to Nominal CSI-RSRQ –3.5dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ +3.5dB to Nominal CSI-RSRQ –4.5dB according to the requirements in Clause 5.7.8.0.1 with an additional -1dB margin reflecting the possible impact of UE self-noise in the test. Nominal CSI-RSRQ is the value shown in Table 5.7.8.1.5-2.

Table 5.7.8.1.5-1: CSI-RSRQ intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
	Initial DL BWP		DLBWP.0.1			

BWP configuration	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
CSI-RS configuration for RRM			CSI-RS.RRM.FR2.1 TDD			
TCI state			TCI.State .0		TCI.State .0	
PDSCH Reference measurement channel			SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC.1			
SSB configuration			SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
Time offset with Cell 2		µs	-	0.58	-	0.58
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
SS-RSSI-Measurement			Not Applicable			
EPRE ratio of PSS to SSS EPRE ratio of PBCH_DMRS to SSS EPRE ratio of PBCH to PBCH_DMRS EPRE ratio of PDCCH_DMRS to SSS EPRE ratio of PDCCH to PDCCH_DMRS EPRE ratio of PDSCH_DMRS to SSS EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1		dB	0	0	0	0

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Void

Table 5.7.8.1.5-2: CSI-RSRQ intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to Clause A.3.15.1 in TS 38.133 [6]			
Assumption for UE beams Note 9		Rough			
N_{oc} Note1	dBm/15kHz Note4	-100.7		-96.7	
N_{oc} Note1	dBm/SCS Note3	-91.7		-87.7	
CSI-RSRP Note2	dBm/SCS Note4	-88.67	-88.67	-90.67	-90.67
CSI-RSRQ Note2	dB	-14.81	-14.81	-16.84	-16.84
$\hat{E}_s / N_{oc}$ for SSB	dB	3	3	-3	-3
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	3	3	-3	-3
$\hat{E}_s / I_{ot}$ for SSB	dB	-1.83	-1.83	-4.81	-4.81
$\hat{E}_s / I_{ot}$ for CSI-RS	dB	-1.83	-1.83	-4.81	-4.81

Io[Note2]	dBm/95.04 MHz [Note4]	-55.7	-55.67	-55.67

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6].
Note 7: Void
Note 8: Void
Note 9: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6], and does not limit UE implementation or test system implementation.

Table 5.7.8.1.5-3: CSI-RSRQ Intra frequency absolute accuracy requirements for the reported values

UE Power Class 3	Test 1		Test 2	
Normal Conditions				
Lowest reported value (Cell 3)	n257, n258, n261	CSI-RSRQ_52	n257, n258, n261	CSI-RSRQ_46
	n260	CSI-RSRQ_51	n260	CSI-RSRQ_46
	n259	FFS	n259	FFS
Highest reported value (Cell 3)	All bands	CSI-RSRQ_62	All bands	CSI-RSRQ_60

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

5.7.8.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

5.7.8.2.1 Test purpose

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.10 in TS 38.133 [6] for inter-frequency measurement.

5.7.8.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting CSI-RS based RSRP and RSRQ measurements.

5.7.8.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 5.7.8.0.2.

The normative reference for this requirement is in TS 38.133 [6] A.5.7.8.2.

5.7.8.2.4 Test description

Three cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell, Cell 2 is the NR FR2 PSCell and Cell 3 is the NR FR2 neighbour cell on a different NR FR2 frequency.

5.7.8.2.4.1 Initial conditions

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table 5.7.8.2.4.1-1.

Table 5.7.8.2.4.1-1: CSI-RSRQ Inter frequency CSI-RSRQ supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 5.7.8.2.4.1-2.

Table 5.7.8.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] Clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.2 and Table E.3-1 and TS 38.508-1 [14] Clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 5.7.8.2.5-1.
2. Message contents are defined in Clause 5.7.8.2.4.3.
3. There are three carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier, Cell 2 is the NR PSCell on one of the NR FR2 carriers and Cell 3 is the neighbour cell on the other NR FR2 carrier. Cell 3 is the target for the SS-RSRQ measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] Clause C.1.0 and C.1.1.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.8.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 5.7.8.2.5-1 and Table 5.7.8.2.5-2 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the CSI-RSRQ reported values in the periodic MeasurementReport. The CSI-RSRQ value of Cell 3 reported by the UE is compared to the expected CSI-RSRQ. If the value is outside the limits (determined by Table 5.7.8.0.2.1-1 and Table 5.7.8.0.2.1-2) or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 5.7.8.2.5-1 and Table 5.7.8.2.5-2 as appropriate and repeat steps 5-7.

5.7.8.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 5.7.8.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ, CSI-RS MOBILITY and RSRQ Table H.3.4-1a with condition GAP_NEEDED Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0

Table 5.7.8.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
maxReportCells	2		
}			
}			
}			

]

5.7.8.2.5 Test Requirements

Both absolute accuracy and relative accuracy requirements of CSI-RSRQ inter-frequency measurement are tested by using test setup in Table 5.7.8.2.5-1 and Table 5.7.8.2.5-2.

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ +2.5dB to Nominal CSI-RSRQ -3.5dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ +3.5dB to Nominal CSI-RSRQ -4.5dB according to the requirements in Clause 5.7.8.0.2.1 with an additional -1dB margin reflecting the possible impact of UE self-noise in the test.

The CSI-RSRQ relative measurement accuracy shall fulfil the requirements in Clause 5.7.8.0.2.2.

Table 5.7.8.2.5-1: CSI-RSRQ Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq1	freq2	freq1	Freq2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1

SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
Time offset with Cell 2	µs	-	0.58	-	0.58
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RSRQ, CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 5.7.8.2.5-2: CSI-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
AoA setup		Setup 1 in Clause A.3.15 in TS 38.133 [6]		Setup 1 in Clause A.3.15 in TS 38.133 [6]	
Assumption for UE beams Note 8		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-95.93		-95.44	
N_{oc} Note1	dBm/SCS Note3	-86.90		-86.41	
CSI-RP Note2	dBm/SCS Note4	-88.65	-88.65	-89.41	-89.41
CSI-RSRQ Note2	dB	-14.80	-14.80	-15.59	-15.59
$\hat{E}_s / N_{oc}$ for SSB	dB	-1.75	-1.75	-3	-3
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	-1.75	-1.75	-3	-3
$\hat{E}_s / I_{ot}$ for SSB	dB	-1.81	-1.81	-3.06	-3.06
$\hat{E}_s / I_{ot}$ for CSI-RS	dB	-1.81	-1.81	-3.06	-3.06
Io Note2	dBm/95.04 MHz Note4	-55.69	-55.69	-55.66	-55.66

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-RSRQ, CSI-RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-RSRQ and CSI-RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6: Void
Note 7: Void
Note 8: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6] and does not limit UE implementation or test system implementation.

Table 5.7.8.2.5-3: Evaluation limits for the reported values for T1 and T2 absolute accuracy

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	RSRQ 52	n257, n258, n261	RSRQ_48
		n260	RSRQ_48
Highest reported value (Cell 2)	RSRQ 62	n257, n258, n261	RSRQ_63
		n260	RSRQ_62
Lowest reported value (Cell 3)	RSRQ 52	n257, n258, n261	RSRQ_48
		n260	RSRQ_48
Highest reported value (Cell 3)	RSRQ 62	n257, n258, n261	RSRQ_63
		n260	RSRQ_62

Table 5.7.8.2.5-4: Evaluation limits for the reported values for T1 and T2 relative accuracy

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest value (RSRQ report Cell 3 – RSRQ report Cell 2)	- 7	- 9
Highest value (RSRQ report Cell 3 – RSRQ report Cell 2)	+ 7	+ 9

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

5.7.9 CSI-SINR

5.7.9.0 Minimum conformance requirements

5.7.9.0.1 Intra-frequency CSI-SINR accuracy requirements

[TS 38.133, Clause 10.1.13.2 and Clause 10.1.16]

5.7.9.0.1.1 Absolute CSI-SINR accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 5.7.9.0.1.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.12 in TS 38.133 [6] for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in Clause 7.3.4 of TS 38.101-2 [3].
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for intra-frequency measurement is serving cell timing.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.9.0.1.1-1.

Table 5.7.9.0.1.1-1: CSI-SINR Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io [Note 2] range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} [Note 1]		$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±3	±4	≥-3	Same value as CSI_RP in Table B.2.8-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-6			

Note 1: Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

The reporting range of CSI-SINR for reporting is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 5.7.9.0.1.1-2. The range in the signaling may be larger than the guaranteed accuracy range.

Table 5.7.9.0.1.1-2: CSI-SINR measurement report mapping

Reported value	Measured quantity value	Unit
CSI-SINR_0	CSI-SINR <-23	dB
CSI-SINR_1	-23≤ CSI-SINR <-22.5	dB
CSI-SINR_2	-22.5≤ CSI-SINR <-22	dB
CSI-SINR_3	-22≤ CSI-SINR <-21.5	dB
CSI-SINR_4	-21.5≤ CSI-SINR <-21	dB
..	..	…
CSI-SINR_123	38≤ CSI-SINR <38.5	dB
CSI-SINR_124	38.5≤ CSI-SINR <39	dB
CSI-SINR_125	39≤ CSI-SINR <39.5	dB
CSI-SINR_126	39.5≤ CSI-SINR <40	dB
CSI-SINR_127	40≤ CSI-SINR	dB

5.7.9.0.2 Inter-frequency CSI-SINR accuracy requirements

[TS 38.133, Clause 10.1.15.2 and Clause 10.1.16]

5.7.9.0.2.1 Absolute CSI-SINR accuracy

The requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 5.7.9.0.2.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in Clause 7.3.4 of TS 38.101-2 [3].

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

  - Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.9.0.2.1-1.

Table 5.7.9.0.2.1-1: CSI-SINR Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±3	±4	≥-3	Same value as CSI_RP in Table B.2.9-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival		-50
3.5	±4	≥-4			

Note 1: Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

The reporting range of CSI-SINR for reporting is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 5.7.9.0.2.1-2. The range in the signaling may be larger than the guaranteed accuracy range.

Table 5.7.9.0.2.1-2: CSI-SINR measurement report mapping

Reported value	Measured quantity value	Unit
CSI-SINR_0	CSI-SINR <-23	dB
CSI-SINR_1	-23≤ CSI-SINR <-22.5	dB
CSI-SINR_2	-22.5≤ CSI-SINR <-22	dB
CSI-SINR_3	-22≤ CSI-SINR <-21.5	dB
CSI-SINR_4	-21.5≤ CSI-SINR <-21	dB
..	..	…
CSI-SINR_123	38≤ CSI-SINR <38.5	dB
CSI-SINR_124	38.5≤ CSI-SINR <39	dB
CSI-SINR_125	39≤ CSI-SINR <39.5	dB
CSI-SINR_126	39.5≤ CSI-SINR <40	dB
CSI-SINR_127	40≤ CSI-SINR	dB

5.7.9.0.2.2 Relative CSI-SINR accuracy

The relative accuracy of CSI-SINR in inter frequency case is defined as the CSI-SINR measured from one cell on a frequency in FR2 compared to the CSI-SINR measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 5.7.9.0.2.2-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band.
- $|CSI_RP1_{dBm} - CSI_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in Clause 7.3.4 of TS 38.101-2 [3].
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 5.7.9.0.2.2-1.

Table 5.7.9.0.2.2-1: CSI-SINR Inter frequency relative accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range	
			Minimum Io	Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz / SCS_{CSI-RS} = 120kHz	
±3.5	±4	≥-3	Same value as CSI_RP in Table B.2.9-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival	-50
±4	±4	≥-6		

Note 1: Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

5.7.9.1 EN-DC intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

5.7.9.1.1 Test purpose

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.13.2.1 in TS 38.133 [6].

5.7.9.1.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward, which supports CSI-RS based SINR measurements.

5.7.9.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 5.7.9.0.1.

The normative reference for this requirement is in TS 38.133 [6] A.5.7.9.1.

5.7.9.1.4 Test description

5.7.9.1.4.1 Initial conditions

Supported test configurations are shown in Table 5.7.9.1.4.1-1.

Table 5.7.9.1.4.1-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 5.7.9.1.4.1-2.

Table 5.7.9.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] Clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] Clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A
Exceptions to connection diagram	N/A	

1. Message contents are defined in Clause 5.7.9.1.4.3.

2. There are two carriers and three cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier which is specified in Clause A.3.7.2.1 in TS 38.133 [6], Cell 2 is the NR PSCell on the NR FR2 carrier and Cell 3 is the neighbour cell on the same NR FR2 carrier. Cell 3 is the target for the CSI-SINR measurements. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] Clause C.1.0 and C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.9.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.

2. Set the parameters according to Table 5.7.9.1.5-1 and Table 5.7.9.1.5-2 as appropriate.

3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the CSI-SINR reported values in the periodic MeasurementReport. The CSI-SINR value of Cell 3 reported by the UE is compared to the expected CSI-SINR. If the value is outside the limits (determined by Table 5.7.9.0.1.1-1 and Table 5.7.9.0.1.1-2) or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 5.7.9.1.5-1 and Table 5.7.9.1.5-2 as appropriate and repeat steps 5-7.

5.7.9.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 5.7.9.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition CSI-RS MOBILITY and SINR Table H.3.4-1a Table H.3.4-2

Table 5.7.9.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

5.7.9.1.5 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR+3dB to Nominal CSI-SINR -4dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR +3.5dB to Nominal CSI-SINR -4.5dB according to the requirements in Clause 5.7.9.0.1.1 with an additional -1dB margin reflecting the possible impact of UE self-noise in the test. Nominal CSI-SINR is the value shown in Table 5.7.9.1.5-2.

Table 5.7.9.1.5-1: CSI-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated RMSI CORESET Reference Channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
CSI-RS for mobility		-	CSI-RS.RRM.FR2.1 TDD	-	CSI-RS.RRM.FR2.1 TDD
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
Time offset with Cell 2	µs	-	0.29	-	0.29
CSI-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 5.7.9.1.5-2: CSI-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to Clause A.3.15.1 in TS 38.133 [6]		Setup 1 according to Clause A.3.15.1 in TS 38.133 [6]	
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105		-105	
N_{oc} Note1	dBm/SCS Note3	-96		-96	

$\hat{E}_s/N_{oc}$ for SSB	dB	4.54	2.66	-2.8	-2.8
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	4.54	2.66	-2.8	-2.8
CSI-RSRP Note2	dBm/SCS Note4	-91.43	-93.31	-98.77	-98.77
CSI-SINR Note2	dB	-0.18	-3.32	-4.95	-4.95
$\hat{E}_s/I_{ot}$ for SSB	dB	-0.18	-3.32	-4.95	-4.95
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	-0.18	-3.32	-4.95	-4.95
Io Note2	dBm/95.04 MHz Note4	-59.43		-63.87	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6].
Note 7: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6] and does not limit UE implementation or test system implementation.

Table 5.7.9.1.5-3: CSI-SINR Intra frequency absolute accuracy requirements for the reported values

UE Power Class 3	Test 1		Test 2	
Normal Conditions				
Lowest reported value (Cell 3)	n257, n258, n261	CSI-SINR_32	n257, n258, n261	CSI-SINR_29
	n260	CSI-SINR_32	n260	CSI-SINR_28
	n259	FFS	n259	FFS
Highest reported value (Cell 3)	All bands	CSI-SINR_48	All bands	CSI-SINR_45

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

5.7.9.2 EN-DC inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

5.7.9.2.1 Test purpose

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.15.2.1 and 10.1.15.2.2 in TS 38.133 [6] for inter-frequency measurement.

5.7.9.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward, which supports CSI-RS based SINR measurements.

5.7.9.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 5.7.9.0.2.

The normative reference for this requirement is in TS 38.133 [6] A.5.7.9.2.

5.7.9.2.4 Test description

5.7.9.2.4.1 Initial conditions

Supported test configurations are shown in Table 5.7.9.2.4.1-1.

Table 5.7.9.2.4.1-1: CSI-SINR inter frequency CSI-SINR supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 5.7.9.2.4.1-2.

Table 5.7.9.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] Clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.2 and Table E.3-1 and TS 38.508-1 [14] Clause 4.3.1 for E-UTRA and 7.2.3 for NR.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Clause C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in Clause 5.7.9.2.4.3.

2. There are two carriers and three cells specified in the test. In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier which is specified in Clause A.3.7.2.1 in TS 38.133 [6]. The TCI status for Cell 1 is defined in Table A.3.16.2-1 in TS 38.133 [6] and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1 in TS 38.133 [6]. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] Clause C.1.0 and C.1.1. Cell 2 is the NR PSCell on the NR FR2 carrier and Cell 3 is the neighbour cell on the same NR FR2 carrier. Cell 3 is the target for the CSI-SINR measurements.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

5.7.9.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.

2. Set the parameters according to Table 5.7.9.2.5-1 and Table 5.7.9.2.5-2 as appropriate.

3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the CSI-SINR reported values in the periodic MeasurementReport. The CSI-SINR value of Cell 3 reported by the UE is compared to the expected CSI-SINR. If the value is outside the limits (determined by Table 5.7.9.0.2.1-1 and Table 5.7.9.0.2.1-2) or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 5.7.9.2.5-1 and Table 5.7.9.2.5-2 as appropriate and repeat steps 5-7.

5.7.9.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 5.7.9.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ, CSI-RS MOBILITY and SINR Table H.3.4-1a with condition GAP_NEEDED Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0

Table 5.7.9.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

5.7.9.2.5 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR+3dB to Nominal CSI-SINR -4dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR+3.5dB to Nominal CSI-SINR -4.5dB according to the requirements in Clause 5.7.9.0.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal CSI-SINR is the value shown in Table 5.7.9.2.5-2.

The CSI-SINR relative measurement accuracy shall fulfil the requirements in Clause 5.7.9.0.2.2.

Table 5.7.9.2.5-1: CSI-SINR inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq1	freq2	freq1	Freq2	freq1	Freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					

Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
Time offset with cell 2	µs	-	0.29	-	0.29	-	0.29
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1	SMTC.1	SMTC.1
CSI-RS for mobility		-	CSI-RS.RRM.FR2.1 TDD	-	CSI-RS.RRM.FR2.1 TDD	-	CSI-RS.RRM.FR2.1 TDD
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS Note 1							

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-SINR, CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 5.7.9.2.5-2: CSI-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration	degrees	Setup 1 according to A.3.15.1 in TS 38.133 [6]		Setup 1 according to A.3.15.1 in TS 38.133 [6]		Setup 1 according to A.3.15.1 in TS 38.133 [6]	
Assumption for UE beams Note 7		Rough		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105		-105.1		-105	
N_{oc} Note1	dBm/SCS Note3	-96		-96.1		-96	
$\hat{E}_s / N_{oc}$ for SSB	dB	-0.5	-0.5	11.0	11.0	-2.1	-2.1
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	-0.5	-0.5	11.0	11.0	-2.1	-2.1
CSI-RSRP Note2	dBm/SCS Note4	-96.47	-96.47	-85.07	-85.07	-98.07	-98.07
CSI-SINR Note2	dB	-0.98	-0.98	10.51	10.51	-2.58	-2.58
$\hat{E}_s / I_{ot}$ for SSB	dB	-0.98	-0.98	10.51	10.51	-2.58	-2.58
$\hat{E}_s / I_{ot}$ for CSI-RS	dB	-0.98	-0.98	10.51	10.51	-2.58	-2.58
Io Note2	dBm/95.04 MHz Note4	-64.21		-55.75		-64.90	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6].
Note 7: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6] and does not limit UE implementation or test system implementation.

Table 5.7.9.2.5-3: Evaluation limits for the reported values for T1 and T2 absolute accuracy

UE power class 3						
Normal Conditions	**Test 1**		**Test 2**		**Test 3**	
Lowest reported value (Cell 2)	n257, n258, n261	SINR_37	n257, n258, n261	SINR_54	n257, n258, n261	SINR_33
	n260	SINR_36	n260	SINR_54	n260	SINR_32
	n259	FFS	n259	FFS	n259	FFS
Highest reported value (Cell 2)	n257, n258, n261	SINR_52	n257, n258, n261	SINR_81	n257, n258, n261	SINR_50
	n260	SINR_52	n260	SINR_80	n260	SINR_50
	n259	FFS	n259	FFS	n259	FFS
Lowest reported value (Cell 3)	n257, n258, n261	SINR_37	n257, n258, n261	SINR_54	n257, n258, n261	SINR_33
	n260	SINR_36	n260	SINR_54	n260	SINR_32
	n259	FFS	n259	FFS	n259	FFS
Highest reported value (Cell 3)	n257, n258, n261	SINR_52	n257, n258, n261	SINR_81	n257, n258, n261	SINR_50
	n260	SINR_52	n260	SINR_80	n260	SINR_50
	n259	FFS	n259	FFS	n259	FFS

Table 5.7.9.2.5-4: Evaluation limits for the reported values for T1 and T2 relative accuracy

UE power class 3			
Normal Conditions	**Test 1**	**Test 2**	**Test 3**
Lowest value (SINR report Cell 3 – SINR report Cell 2)	-8	-17	-9
Highest value (SINR report Cell 3 – SINR report Cell 2)	8	17	9

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6 NR standalone in FR1

6.0 General

This clause contains test scenarios for NR standalone. This configuration is also known as NR/5GC. All NR cells are in Frequency Range 1.

6.1 RRC_IDLE state mobility

6.1.1 NR cell re-selection

6.1.1.0 Minimum conformance requirements

6.1.1.0.1 Minimum conformance requirements for intra-frequency cell re-selection

The cell re-selection delay shall be less than $T_{evaluate\ NR_Intra} + T_{SI\text{-}NR}$ in RRC_IDLE state.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS38.304 [30] within T_{detect,NR_Intra} as defined in table 4.2.2.3-1 of TS 38.133 [6] when that Treselection= 0. An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.2 of TS 38.133 [6] for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra}$ (see table 4.2.2.3-1 of TS 38.133 [6]) for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined within $T_{evaluate,NR_Intra}$ when $T_{reselection} = 0$ as specified in table 4.2.2.3-1 of TS 38.133 [6] provided that the cell has at least [3]dB better ranked.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the intra-frequency cell is satisfied with the reselection criteria which are defined in TS38.304 [30], the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The normative reference for this requirement is TS 38.133 [6] clause 4.2.2.2 and 4.2.2.3.

6.1.1.0.2 Minimum conformance requirements for inter-frequency cell re-selection

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If $Srxlev > S_{nonIntraSearchP}$ and $Squal > S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 of TS 38.133 [6].

If $Srxlev \leq S_{nonIntraSearchP}$ or $Squal \leq S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS38.304 [30] within $K_{carrier} * T_{detect,NR_Inter} + K_{carrier_HST} * T_{detect,NR_Inter_HST}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 5 dB for reselections based on ranking or 6dB for SS-RSRP reselections based on absolute priorities or 4dB for SS-RSRQ reselections based on absolute priorities.

The parameter $K_{carrier}$ is the number of NR inter-frequency carriers which are not configured with *highSpeedMeasInterFreq-r17* for FR1 indicated by the serving cell. The parameter $K_{carrier_HST}$ is the number of NR inter-frequency carriers which are configured with *highSpeedMeasInterFreq-r17* for FR1 indicated by the serving cell. The parameter $K_{carrier}$ for a UE configured with idle mode CA measurements (while T331 is running), is the combined number of NR inter-frequency carriers indicated by the serving cell and the number of NR inter-frequency carriers configured for idle mode CA measurements which are not configured with *highSpeedMeasInterFreq-r17* for FR1. The parameter $K_{carrier_HST}$ for a UE configured with idle mode CA measurements (while T331 is running), is the combined number of NR inter-frequency carriers indicated by the serving cell and the number of NR inter-frequency carriers configured for idle mode CA measurements which are configured with *highSpeedMeasInterFreq-r17* for FR1.

Note: combined total number means that if a carrier is an inter-frequency carrier indicated by the serving cell for mobility and additionally a carrier configured for idle mode CA measurements, it only counts as one carrier.

An inter-frequency cell is considered to be detectable according to the conditions defined in TS 38.133 [6] Annex B.1.3 for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier} * T_{measure,NR_Inter} + K_{carrier_HST} * T_{measure,NR_Inter_HST}$ (see table 6.1.1.0.2-1 and table 6.1.1.0.2-2 if UE declares support of idle mode inter-frequency measurement enhancement when configured with highSpeedMeasInterFreq-r17 for FR1, otherwise see table 6.1.1.0.2-1 only of TS 38.133 [6]) for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter}/2$ for carriers which are not configured with highSpeedMeasInterFreq-r17 for FR1or Tmeasure,NR_Inter_HST /2 for carriers which are configured with highSpeedMeasInterFreq-r17 forFR1.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [30] within

$K_{carrier} * T_{evaluate,NR_Inter} + K_{carrier_HST} * T_{evaluate,NR_Inter_HST}$ when $T_{reselection} = 0$ as specified in table 6.1.1.0.2-1 and table 6.1.1.0.2-2 in TS 38.133 [6] if UE declares support of idle mode inter-frequency measurement enhancement when configured with *highSpeedMeasInterFreq-r17* for FR1, otherwise see table 6.1.1.0.2-1 only, provided that the reselection criteria is met by

- the condition when performing equal priority reselection and

  when *rangeToBestCell* is not configured:

  - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 or.

  when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [30] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.

  - if there are multiple such cells, the cell has the highest rank among them

- the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 if the current serving cell is among them. or

- 6dB for SS-RSRP reselections based on absolute priorities or

- 4dB for SS-RSRQ reselections based on absolute priorities.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 6.1.1.0.2-1 of TS 38.133 [6] under the following conditions:

- $T_{SMTC_intra} = T_{SMTC_inter} = 160$ ms; where T_{SMTC_intra} and T_{SMTC_inter} are periodicities of the SMTC occasions configured for the intra-frequency carrier and the inter-frequency carrier respectively, and

- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to TBD ms after the end of the SMTC occasions configured for the intra-frequency carrier, and

- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to TBD ms before the start or up to TBD ms after the end of the paging occasion [1].

Table 6.1.1.0.2-1: T_{detect,NR_Inter}, $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$

DRX cycle length [s]	Scaling Factor (N1)			T_{detect,NR_Inter} [s] (number of DRX cycles)	$T_{measure,NR_Inter}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter}$ [s] (number of DRX cycles)
	FR1	FR2-1 Note1	FR2-2 Note2			
0.32	1	8	12	11.52 x N1 x 1.5 (36 x N1 x 1.5)	1.28 x N1 x 1.5 (4 x N1 x 1.5)	5.12 x N1 x 1.5 (16 x N1 x 1.5)
0.64		5	8	17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	6	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	5	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)

Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.
Note 2: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.

Table 6.1.1.0.2-2: T_{detect,NR_Inter_HST}, $T_{measure,NR_Inter_HST}$ and $T_{evaluate,NR_Inter_HST}$ for FR1 configured with *highSpeedMeasInterFreq-r17* note2

DRX cycle length [s]	T_{detect,NR_Inter_HST} [s] (number of DRX cycles)	$T_{measure,NR_Inter_HST}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_HST}$ [s] (number of DRX cycles)
0.32	[3.2 x M2 (10 x M2)] Note 1	[0.32 x M3 ([1] x M3)] Note 1	0.96 x M4 (3 x M4) Note 1
0.64	[6.4 (10)]	[0.64 (1)]	1.92 (3)
1.28	[10.24 (8)]	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)

Note 1:	When SMTC < = 40 ms, M2 = M3 = M4 = 1; and when SMTC > 40 ms, M2 = 1.5, M3 = M4 = 2
Note 2:	The support of HST Idle mode inter-frequency measurement enhancement is optional without capability signalling. Apply for UE declaring supports idle mode inter-frequency measurement enhancement for HST, otherwise Table 6.1.1.0.2-1 shall be used.

The normative reference for this requirement is TS 38.133 [6] clause 4.2.2.4.

6.1.1.0.3 Minimum conformance requirements for intra-frequency cell re-selection for UE configured with highSpeedMeasFlag-r16

The cell re-selection delay shall be less than $T_{evaluate\ NR_Intra} + T_{SI\text{-}NR}$ in RRC_IDLE state.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS38.304 [30] within T_{detect,NR_Intra} as defined in table 4.2.2.3-2 of TS 38.133 [6] when that Treselection= 0. An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.2 of TS 38.133 [6] for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra}$ (see table 4.2.2.3-2 of TS 38.133 [6]) for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined within $T_{evaluate,NR_Intra}$ when $T_{reselection} = 0$ as specified in table 4.2.2.3-2 of TS 38.133 [6] provided that the cell has at least 3dB better ranked.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the intra-frequency cell is satisfied with the reselection criteria which are defined in TS38.304 [30], the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The normative reference for this requirement is TS 38.133 [6] clause 4.2.2.2 and 4.2.2.3.

6.1.1.0.4 Minimum conformance requirements for intra-frequency cell re-selection when UE configured with relaxed measurement criterion

[TS 38.133, clause 4.2.2.3]

An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.2 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra}$ for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS38.304 [1] within $T_{evaluate,NR_Intra}$ when $T_{reselection} = 0$ provided that:

when *rangeToBestCell* is not configured:

- the cell is at least 3dB better ranked in FR1.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

[TS 38.133, clause 4.2.2.9.2]

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *lowMobilityEvalutation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvalutation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and UE has fulfilled only the *lowMobilityEvalutation* [2] criterion.

The requirements defined in clause 4.2.2.3 apply for this clause except that:

- T_{detect,NR_Intra} as specified in Table 4.2.2.9.2-1.
- $T_{measure,NR_Intra}$ as specified in Table 4.2.2.9.2-1.
- $T_{evaluate,NR_Intra}$ as specified in Table 4.2.2.9.2-1.

Table 4.2.2.9.2-1: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$

DRX cycle length [s]	Scaling Factor (N1)		T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x M2 x K1 (36 x N1 x M2 x K1)	1.28 x N1 x M2 x K1 (4 x N1 x M2 x K1)	5.12 x N1 x M2 x K1 (16 x N1 x M2 x K1)
0.64		5	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, N1 = 8 for all DRX cycle length. Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvalutation* [13] criterion.					

[TS 38.133, clause 4.2.2.9.3]

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvalutation* [2] criterion and *cellEdgeEvaluation* [2] criteria and *combineRelaxedMeasCondition* [2] not configured, and UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

The requirements defined in clause 4.2.2.3 apply for this clause except that:

- T_{detect,NR_Intra} as specified in Table 4.2.2.9.3-1.
- $T_{measure,NR_Intra}$ as specified in Table 4.2.2.9.3-1.
- $T_{evaluate,NR_Intra}$ as specified in Table 4.2.2.9.3-1.

Table 4.2.2.9.3-1: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$

DRX cycle length [s]	Scaling Factor (N1)		T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x M2 x K1 (36 x N1 x M2 x K1)	1.28 x N1 x M2 x K1 (4 x N1 x M2 x K1)	5.12 x N1 x M2 x K1 (16 x N1 x M2 x K1)
0.64		5	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, N1 = 8 for all DRX cycle length. Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.					

[TS 38.133, Annex B.1.2]

This clause defines the following conditions for NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.1.2-1 for FR1 NR cells.

Table B.1.2-1: Conditions for intra-frequency cell re-selection in FR1

Parameter	NR operating band groups [Note1]	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	Depending on band group	-124+ Δ_{BG_offset}	-121+ Δ_{BG_offset}	≥ -4
NOTE 1: NR operating band groups are defined in TS 38.133 [6] clause 3.5.2. NOTE 2: For NR operating band groups, Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.				

6.1.1.0.5 Minimum conformance requirements for inter-frequency cell re-selection when UE configured with relaxed measurement criterion

[TS 38.133, clause 4.2.2.4]

An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.1.3 for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier} * T_{measure,NR_Inter}$ for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [1] within $K_{carrier}$ * $T_{evaluate,NR_Inter}$ when $T_{reselection}$ = 0 provided that the reselection criteria is met by

- the condition when performing equal priority reselection and
- 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

[TS 38.133, clause 4.2.2.10.2]

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- T331 timer is not running for EMR measurements on inter-frequency NR carrier, and
- UE is configured with *lowMobilityEvalutation* [2] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvalutation* [2] and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and
- UE has fulfilled only the *lowMobilityEvalutation* [2] criterion.

When Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2.2.4 apply for this clause except that:

- T_{detect,NR_Inter} as specified in Table 4.2.2.10.2-1.
- $T_{measure,NR_Inter}$ as specified in Table 4.2.2.10.2-1.
- $T_{evaluate,NR_Inter}$ as specified in Table 4.2.2.10.2-1.

Table 4.2.2.10.2-1: T_{detect,NR_Inter}, $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$

DRX cycle length [s]	Scaling Factor (N1)		T_{detect,NR_Inter} [s] (number of DRX cycles)	$T_{measure,NR_Inter}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x 1.5 x K1 (36 x N1 x 1.5 x K1)	1.28 x N1 x 1.5 x K1 (4 x N1 x 1.5 x K1)	5.12 x N1 x 1.5 x K1 (16 x N1 x 1.5 x K1)
0.64		5	17.92x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, N1 = 8 for all DRX cycle length. Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the low mobility.					

[TS 38.133, clause 4.2.2.10.3]

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- T331 timer is not running for EMR measurements on inter-frequency NR carrier, and
- UE is configured with *cellEdgeEvaluation* [2] criterion, and UE has fulfilled or
- UE is configured with both *lowMobilityEvalutation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] not configured, and
- UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

When Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2.2.4 apply for this clause except that:

- T_{detect,NR_Inter} as specified in Table 4.2.2.10.3-1.

- $T_{measure,NR_Inter}$ as specified in Table 4.2.2.10.3-1.
- $T_{evaluate,NR_Inter}$ as specified in Table 4.2.2.10.3-1.

Table 4.2.2.10.3-1: T_{detect,NR_Inter}, $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$

DRX cycle length [s]	Scaling Factor (N1)		T_{detect,NR_Inter} [s] (number of DRX cycles)	$T_{measure,NR_Inter}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x 1.5 x K1 (36 x N1 x 1.5 x K1)	1.28 x N1 x 1.5 x K1 (4 x N1 x 1.5 x K1)	5.12 x N1 x 1.5 x K1 (16 x N1 x 1.5 x K1)
0.64		5	17.92x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, N1 = 8 for all DRX cycle length. Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.					

[TS 38.133, Annex B.1.3]

This clause defines the following conditions for NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions defined in Table B.1.2-1 for FR1 NR intra-frequency cell re-selection shall also apply for FR1 NR inter-frequency cells in this clause.

[TS 38.133, Annex B.1.2]

This clause defines the following conditions for NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.1.2-1 for FR1 NR cells.

Table B.1.2-1: Conditions for intra-frequency cell re-selection in FR1

Parameter	NR operating band groups [Note1]	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	Depending on band group	-124+ Δ_{BG_offset}	-121+ Δ_{BG_offset}	≥ -4
NOTE 1: NR operating band groups are defined in TS 38.133 [6] clause 3.5.2. NOTE 2: For NR operating band groups, Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.				

6.1.1.1 NR SA FR1 cell re-selection

6.1.1.1.1 Test purpose

The purpose of this test is to verify that when the current and target cell operates on the same carrier frequency the UE is able to search and measure cells to meet the intra-frequency NR cell re-selection requirements.

6.1.1.1.2 Test applicability

This test applies to all types of NR UE from release 15 onwards.

6.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.1.1.

6.1.1.1.4 Test description

6.1.1.1.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 6.1.1.1.4.1-1.

Table 6.1.1.1.4.1-1: Supported test configurations for NR SA FR1 cell re-selection

Configuration	Description
6.1.1.1-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.1.1.1-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.1.1.1-3	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.1.1.1.4.1-2.

Table 6.1.1.1.4.1-2: Initial conditions for NR SA FR1 cell re-selection

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.1.1.1.4.1-3.

2. Message contents are defined in clause 6.1.1.1.4.3.

3. There is one NR carrier and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 6.1.1.1.4.1-3: General test parameters for NR SA FR1 cell re-selection

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
T2 end condition	Active cell		1, 2, 3	Cell2	
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	
	Neighbour cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	1.28	The value shall be used for all cells in the test.

PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2, 3	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

6.1.1.1.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 3 successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Set Cell 2 physical cell identity = initial cell 2 physical cell identity.

2. Set the parameters according to T1 in Table 6.1.1.1.5-1. T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for one iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.1.1.1.5-1. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 34 seconds from the beginning of time period T2, then count a success for the event “Re-select newly detected Cell 2”. Otherwise count a fail for the event “Re-select newly detected Cell 2”.

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 12.

7a The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 6.1.1.1.5-1. T3 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

10. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 8 seconds from the beginning of time period T3, then count a success for the event “Re-select already detected Cell 1”. Otherwise count a fail for the event “Re-select already detected Cell 1”.

11. If the UE has re-selected Cell 1 within T3, after the re-selection or when T3 expires, continue with step 11a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 12.

11a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.12.
Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 in Cell 1.

13. Repeat step 2-12 until a test verdict has been achieved.
Each of the events "Re-select newly detected Cell 2" and "Re-select already detected Cell 1" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
If both events pass, the test passes. If one event fails, the test fails.

6.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.1.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 6.1.1.1.4.3-2: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-65	-130 is actual value in dBm (-65 * 2 dBm)	6.1.1.1-1, 6.1.1.1-2
	-64	-128 is actual value in dBm (-64 * 2 +1 dBm)	6.1.1.1-3
}			
}			

Table 6.1.1.1.4.3-3: SIB2 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
q-RxLevMin	-65	Actual value is -65*2 = -130dBm	6.1.1.1-1, 6.1.1.1-2
	-64	Actual value is -64*2 = -128dBm	6.1.1.1-3
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		6.1.1.1-1 AND Cell 1
	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.6		6.1.1.1-1 AND Cell 2
	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3		6.1.1.1-2, 6.1.1.1-3

	with condition SMTC.1		
deriveSSB-IndexFromCell	false		6.1.1.1-1
	true		6.1.1.1-2, 6.1.1.1-3
}			
}			

6.1.1.1.5 Test requirement

Tables 6.1.1.1.4.1-3 and 6.1.1.1.5-1 define the primary level settings including test tolerances for intra frequency NR cell re-selection test case.

Table 6.1.1.1.5-1: Cell specific test parameters for NR SA FR1 cell re-selection

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.2.1-1			OP.1 defined in A.2.1-1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-130			-130		
		3	-127			-127		
Pcompensation	dB	1, 2, 3	0			0		
$Qhyst_s$	dB	1, 2, 3	0			0		
$Qoffset_{s,n}$	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	16	-3.55	3.24	-infinity	3.24	-3.55
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	16	13	16.45	-infinity	16.45	13
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-82	-85	-81.55	-infinity	-81.55	-85
		2	-82	-85	-81.55	-infinity	-81.55	-85
		3	-79	-82	-78.54	-infinity	-78.54	-82
Io	dBm/9.36 MHz	1	-53.94	-51.91	-51.91	Specified in Cell 1 columns		
	dBm/9.36 MHz	2	-53.94	-51.91	-51.91			
	dBm/38.16 MHz	3	-47.85	-45.81	-45.81			
Treselection	s	1, 2, 3	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3	60			60		
Propagation Condition		1, 2, 3	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell re-selection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell test requirement in this case is expressed as:

Cell re-selection delay to a newly detectable cell = $T_{detect,NR_Intra} + T_{SI-NR}$

T_{detect,NR_Intra} = 32 s; as specified in TS 38.133 [6] clause 4.2.2.3.

T_{SI-NR} = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

The cell re-selection delay to a newly detectable cell shall be less than a total of 33.28 seconds in this test case (note: this gives a total of 33.28 seconds but the test allows 34 seconds).

The cell re-selection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 1.

The cell re-selection delay to an already detected cell test requirement in this case is expressed as:

Cell re-selection to an already detected cell delay = $T_{evaluate,NR_Intra} + T_{SI-NR}$

$T_{evaluate,NR_Intra}$ = 6.4 s; as specified in TS 38.133 [6] clause 4.2.2.3.

T_{SI-NR} = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

The cell re-selection delay to an already detected cell shall be less than a total of 7.68 seconds in this test case (note: this gives a total of 7.68 seconds but the test allows 8 seconds).

For the test to pass, both events above shall pass.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

6.1.1.2 NR SA FR1-FR1 cell re-selection

6.1.1.2.1 Test purpose

The purpose of this test is to verify the requirement for the inter frequency NR cell reselection.

6.1.1.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.1.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.1.2.

6.1.1.2.4 Test description

6.1.1.2.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 6.1.1.2.4.1-1.

Table 6.1.1.2.4.1-1: Supported test configurations for NR SA FR1-FR1 cell re-selection

Configuration	Description of serving cell	Description of target cell
6.1.1.2-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.1.1.2-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.1.1.2-3	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 6.1.1.2.4.1-2.

Table 6.1.1.2.4.1-2: Initial conditions for NR SA FR1-FR1 cell re-selection

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 6.1.1.2.4.1-3.

2. Message contents are defined in clause 6.1.1.2.4.3.

3. There is two NR carrier and 2 NR Cells specified in the test. Cell 2 is the PCell and Cell 1 is the neighbour cell in a different carrier than cell 2. Cell 1 and Cell 2 are configured according to Annex C.1.2.

Table 6.1.1.2.4.1-3: General test parameters for NR SA FR1-FR1 cell re-selection

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3	Cell1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC 2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC 1	
			3	SMTC 1	
DRX cycle length		s	1, 2, 3	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2

rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

6.1.1.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one of the NR carriers. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

2. Set the parameters according to T1 in Table 6.1.1.2.5-1. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, Cell 1.

4. If the UE responds on lower priority cell, Cell 1 during time duration T1 within 8 seconds from the beginning of time period T1, then count a success for the event “Re-select lower priority Cell 1”. Otherwise count a fail for the event “Re-select lower priority Cell 1”.

5. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 5a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.

5a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 6.1.1.2.5-1. T2 starts. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) shall be changed to ensure Cell 2 is not detected by the UE.

7. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 6.1.1.2.5-1. T3 starts.

8. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, Cell 2.

9. If the UE responds on higher priority cell, Cell 2 during time duration T3 within 68 seconds from the beginning of time period T3, then count a success for the event “Re-select higher priority Cell 2”. Otherwise count a fail for the event “Re-select higher priority Cell 2”.

10. If the UE has re-selected Cell 2 within T3, after the re-selection or when T3 expires, continue with step 10a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11.

10a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

12. Repeat step 2-11 until a test verdict has been achieved.
    Each of the events “Re-select lower priority Cell 1” and “Re-select higher priority Cell 2” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

6.1.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.1.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.2-1 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.2 and Asynchronous cells for configuration 6.1.1.2-1 and Cell 1 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.6 and Asynchronous cells for configuration 6.1.1.2-1 and Cell 2 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.1 and synchronous cells for configuration 6.1.1.2-2 Table H.2.2-2 with Condition SSB.2 FR1, SMTC.1 and synchronous cells for configuration 6.1.1.2-3 Table H.2.2-3
Default RRC messages and information elements contents exceptions	

6.1.1.2.5 Test requirement

Tables 6.1.1.2.4.1-3 and 6.1.1.2.5-1 define the primary level settings including test tolerances for inter frequency NR cell re-selection test case.

Table 6.1.1.2.5-1: Cell specific test parameters for NR SA FR1-FR1 cell re-selection

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.2.1-1			OP.1 defined in A.2.1-1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	15.6	15.6	15.6	-3.6	-infinity	13.6
		2						

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
		3						
N_{oc} Note2	dBm/SCS	1	-98			-100	-98	-98
		2	-98			-100	-98	-98
		3	-95			-97	-95	-95
N_{oc} Note2	dBm/15 kHz	1	-98			-100	-98	-98
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	15.6	15.6	15.6	-3.6	-infinity	13.6
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-82.4	-82.4	-82.4	-103.6	-infinity	-84.4
		2	-82.4	-82.4	-82.4	-103.6	-infinity	-84.4
		3	-79.39	-79.39	-79.39	-100.59	-infinity	-81.39
Io	dBm/9.36 MHz	1	-54.33	-54.33	-54.33	-70.46	-infinity	-56.26
	dBm/9.36 MHz	2	-54.33	-54.33	-54.33	-70.46	-infinity	-56.26
	dBm/38.16 MHz	3	-48.23	-48.23	-48.23	-67.37	-infinity	-53.17
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	50			50		
$Thresh_{x, highP}$	dB	1, 2, 3	48			48		
$Thresh_{serving, lowP}$	dB	1, 2, 3	44			44		
$Thresh_{x, lowP}$	dB	1, 2, 3	50			50		
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate, NR_ inter} + T_{SI-NR}$, and to a lower priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$,

Where:

$T_{higher_priority_search}$ See clause 4.2.2.7 of TS 38.133 [6]

$T_{evaluate, NR_ inter}$ See Table 4.2.2.4-1 in clause 4.2.2.4 of TS 38.133 [6]

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

For the test to pass, both events above shall pass.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

6.1.1.3 NR SA FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

6.1.1.3.1 Test purpose

The purpose of this test is to verify the requirement for the intra frequency NR cell reselection requirements for UE fulfilling low mobility criterion specified in TS 38.133 [6] clause 4.2.2.9.2.

6.1.1.3.2 Test applicability

This test applies to all types of NR UE from release 16 onwards and supporting relaxed measurement.

6.1.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.1.3.

6.1.1.3.4 Test description

6.1.1.3.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 6.1.1.3.4.1-1.

Table 6.1.1.3.4.1-1: Supported test configurations for NR SA FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Configuration	Description
6.1.1.3-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.1.1.3-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.1.1.3-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.1.1.3.4.1-2.

Table 6.1.1.3.4.1-2: Initial conditions for NR SA FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.1.1.3.4.1-3.

2. Message contents are defined in clause 6.1.1.3.4.3.

3. There is one NR carrier and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 6.1.1.3.4.1-3: General test parameters for NR SA FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter	Unit	Test configuration	Value	Comment

Initial condition	Active cell		1, 2, 3	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3	Cell2	
T1 end condition	Active cell		1, 2, 3	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB2 of Cell 1
				SMTC pattern 6	Configured in SIB2 of Cell 2
			2	SMTC pattern 1	
			3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	
T1		s	1, 2, 3	25	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3	25	T2 needs to be defined so that cell re-selection reaction time is taken into account.

6.1.1.3.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 2 successive time periods, with time duration of T1, and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. *lowMobilityEvaluation-r16* is provided in SIB2 of Cell 1 and Cell 2. Set Cell 2 physical cell identity = initial cell 2 physical cell identity.

SIB2 of Cell 1 and Cell 2 are configured as follows:

- *lowMobilityEvaluation-r16* is configured according to the parameters listed in Table 6.1.1.3.5-1.
- *cellEdgeEvaluation-r16* and *combineRelaxedMeasCondition* are not configured.

1. Set the parameters according to T2 in Table 6.1.1.3.5-1. Then wait 54s to ensure that Cell 2 has been detected by the UE.
2. Set the parameters according to T1 in Table 6.1.1.3.5-1. T1 starts.
3. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 2.

4. If the UE responds on Cell 2 within 17 seconds from the beginning of time period T1, then count a success for the event “Re-select Cell 2”. Otherwise count a fail for the event “Re-select Cell 2”.

5. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 12.

6. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

7. The SS shall switch the power setting from T1 to T2 as specified in Table 6.1.1.3.5-1. T2 starts.

8. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.

9. If the UE responds on Cell 1 within 17 seconds from the beginning of time period T2, then count a success for the event “Re-select Cell 1”. Otherwise count a fail for the event “Re-select Cell 1”.

10. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 11. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 12.

11. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1. skip to 14

12. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 in Cell 1.

13. Set the parameters according to T2 in Table 6.1.1.3.5-1. Then wait 54s to ensure that Cell 2 has been detected by the UE.

14. Repeat step 2-13 until a test verdict has been achieved. Each of the events “Re-select Cell 2” and “Re-select Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

6.1.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.1.1.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 6.1.1.3.4.3-2: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
servingCellConfigCommon SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
pcch-Config SEQUENCE {			
defaultPagingCycle	rf64		
}			
}			
}			
}			

Table 6.1.1.3.4.3-3: SIB2 (Cell 1)

Derivation Path: Table H.2.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**

SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		6.1.1.3-1
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		6.1.1.3-2, 6.1.1.3-3
deriveSSB-IndexFromCell	false		6.1.1.3-1
	true		6.1.1.3-2, 6.1.1.3-3
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16 SEQUENCE {			
s-SearchDeltaP-r16	dB6		
t-SearchDeltaP-r16	s5		
}			
cellEdgeEvaluation-r16	Not present		
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 6.1.1.3.4.3-4: SIB2 (Cell 2)

Derivation Path: Table H.2.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.6		6.1.1.3-1
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		6.1.1.3-2, 6.1.1.3-3
deriveSSB-IndexFromCell	false		6.1.1.3-1
	true		6.1.1.3-2, 6.1.1.3-3
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16 SEQUENCE {			
s-SearchDeltaP-r16	dB6		
t-SearchDeltaP-r16	s5		
}			
cellEdgeEvaluation-r16	Not present		
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

6.1.1.3.5 Test requirement

Tables 6.1.1.3.4.1-3 and 6.1.1.3.5-1 define the primary level settings including test tolerances for NR SA FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion test case.

Table 6.1.1.3.5-1: Cell specific test parameters for NR SA FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	

		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
$S_{SearchDeltaP}$	dB	1, 2, 3	6		6	
$T_{SearchDeltaP}$	s	1, 2, 3	5		5	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1, 2, 3	-3.56	3.22	3.22	-3.56
N_{oc} Note2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1, 2, 3	-98			
$\hat{E}_s / N_{oc}$	dB	1, 2, 3	12.55	16	16	12.55
SS-RSRP Note3	dBm/SCS	1	-85.45	-82	-82	-85.45
		2	-85.45	-82	-82	-85.45
		3	-82.45	-79	-79	-82.45
Io	dBm/9.36 MHz	1	-52.35	-52.35	specified in Cell 1 columns-	
	dBm/9.36 MHz	2	-52.35	-52.35		
	dBm/38.16 MHz	3	-46.25	-46.25		
Treselection	s	1, 2, 3	0	0	0	0
SintrasearchP	dB	1, 2, 3	60		60	
Propagation Condition		1, 2, 3	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell re-selection delay to detected cell for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to detected cell for UE fulfilling low mobility criterion is also defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 1.

The cell re-selection delay to a detected cell test requirement for UE fulfilling low mobility criterion in this case is expressed as:

Cell re-selection delay to an already detected cell = $T_{evaluate,NR_Intra} + T_{SI-NR}$

$T_{evaluate,NR_Intra}$ = 15.36 s; as specified in TS 38.133 [6] Table 4.2.2.9.2-1.

T_{SI-NR} = 1.28 s; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to an already detected cell for UE fulfilling low mobility criterion in the test case.

For the test to pass, both events above shall pass.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

6.1.1.4 NR SA FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

6.1.1.4.1 Test purpose

The purpose of this test is to verify the requirement for the intra frequency NR cell reselection requirements for UE fulfilling not-at-cell edge criterion specified in TS 38.133 [6] clause 4.2.2.9.3.

6.1.1.4.2 Test applicability

This test applies to all types of NR UE from release 16 onwards and supporting relaxed measurement.

6.1.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.1.4.

6.1.1.4.4 Test description

6.1.1.4.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 6.1.1.4.4.1-1.

Table 6.1.1.4.4.1-1: Supported test configurations for NR SA FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Configuration	Description
6.1.1.4-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.1.1.4-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.1.1.4-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.1.1.4.4.1-2.

Table 6.1.1.4.4.1-2: Initial conditions for NR SA FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.1.1.4.4.1-3.

2. Message contents are defined in clause 6.1.1.4.4.3.

3. There is one NR carrier and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 6.1.1.4.4.1-3: General test parameters for NR SA FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active Cell		1, 2, 3	Cell1	The UE camps on Cell 1 in the initial phase
	Neighbour Cells		1, 2, 3	Cell2	
T1 end condition	Active Cell		1, 2, 3	Cell2	The UE shall fulfil the not-at-cell edge criterion and reselect to cell 2 during T1 period during T1.
	Neighbour Cells		1, 2, 3	Cell1	
T2 end condition	Active Cell		1, 2, 3	Cell1	The UE shall perform reselection to Cell 1 during T2
	Neighbour Cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between Cells			1	3 ms	Asynchronous Cells
			2	3 µs	Synchronous Cells
			3	3 µs	Synchronous Cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB2 of Cell 1
				SMTC pattern 6	Configured in SIB2 of Cell 2
			2	SMTC pattern 1	
			3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all Cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	
T1		s	1, 2, 3	20	T1 needs to be defined so that Cell re-selection reaction time is taken into account.
T2		s	1, 2, 3	20	T2 needs to be defined so that Cell re-selection reaction time is taken into account.

6.1.1.4.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 2 successive time periods, with time duration of T1, and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. *cellEdgeEvaluation-r16* is provided in SIB2 of Cell 1 and Cell 2. Set Cell 2 physical cell identity = initial cell 2 physical cell identity.

2. Set the parameters according to T2 in Table 6.1.1.4.5-1. Then wait 54s to ensure that Cell 2 has been detected by the UE.
3. Set the parameters according to T1 in Table 6.1.1.4.5-1. T1 starts.
4. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 2.
5. If the UE responds on Cell 2 within 17 seconds from the beginning of time period T1, then count a success for the event “Re-select Cell 2”. Otherwise count a fail for the event “Re-select Cell 2”.
6. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 7. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 13.
7. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.
8. The SS shall switch the power setting from T1 to T2 as specified in Table 6.1.1.4.5-1. T2 starts.
9. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.
10. If the UE responds on Cell 1 within 17 seconds from the beginning of time period T2, then count a success for the event “Re-select Cell 1”. Otherwise count a fail for the event “Re-select Cell 1”.
11. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 12. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 13.
12. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1. skip to 14
13. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 in Cell 1.
14. Repeat step 2-13 until a test verdict has been achieved. Each of the events “Re-select Cell 2” and “Re-select Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

6.1.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.1.1.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 6.1.1.4.4.3-2: SIB1 (Cell 1 and Cell 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
servingCellConfigCommon SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
pcch-Config SEQUENCE {			
defaultPagingCycle	rf64		
}			
}			
}			
}			

Table 6.1.1.4.4.3-3: SIB2 (Cell 1)

Derivation Path: Table H.2.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		6.1.1.4-1
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		6.1.1.4-2, 6.1.1.4-3
deriveSSB-IndexFromCell	false		6.1.1.4-1
	true		6.1.1.4-2, 6.1.1.4-3
}			
relaxedMeasurement-r16 SEQUENCE {			
cellEdgeEvaluation-r16 SEQUENCE {			
s-SearchThresholdP-r16	25	Actual value is 25*2 = 50dB	
s-SearchThresholdQ-r16	Not present		
}			
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 6.1.1.4.4.3-4: SIB2 (Cell 2)

Derivation Path: Table H.2.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.6		6.1.1.4-1
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		6.1.1.4-2, 6.1.1.4-3
deriveSSB-IndexFromCell	false		6.1.1.4-1
	true		6.1.1.4-2, 6.1.1.4-3
}			
relaxedMeasurement-r16 SEQUENCE {			
cellEdgeEvaluation-r16 SEQUENCE {			
s-SearchThresholdP-r16	25	Actual value is 25*2 = 50dB	
s-SearchThresholdQ-r16	Not present		
}			
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

6.1.1.4.5 Test requirement

Tables 6.1.1.4.4.1-3 and 6.1.1.4.5-1 define the primary level settings including test tolerances for NR SA FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion test case.

Table 6.1.1.4.5-1: Cell specific test parameters for NR SA FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1	-3.56	3.22	3.22	-3.56
		2				
		3				
N_{oc} Note2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	12.55	16	16	12.55
		2				
		3				
SS-RSRP Note3	dBm/SCS	1	-85.45	-82	-82	-85.45
		2	-85.45	-82	-82	-85.45
		3	-82.45	-79	-79	-82.45
Io	dBm/9.36 MHz	1	-52.35	-52.35	-52.35	-52.35
	dBm/9.36 MHz	2	-52.35	-52.35	-52.35	-52.35
	dBm/38.16 MHz	3	-46.25	-46.25	-46.25	-46.25
Treselection	s	1, 2, 3	0	0	0	0
SintrasearchP	dB	1, 2, 3	60		60	
$S_{searchThresholdP}$	dB	1, 2, 3	50		50	
Propagation Condition		1, 2, 3	AWGN			

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Note 1: OCNG shall be used such that both Cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other Cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The cell re-selection delay to detected cell for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to detected cell for UE fulfilling not-at-cell edge criterion is also defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 1.

The cell re-selection delay to a detected cell test requirement for UE fulfilling not-at-cell edge criterion in this case is expressed as:

Cell re-selection delay to a detected cell = $T_{evaluate,NR_Intra} + T_{SI-NR}$

$T_{evaluate,NR_Intra}$ = 15.36 s; as specified in TS 38.133 [6] Table 4.2.2.9.3-1.

T_{SI-NR} = 1.28 s; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to an already detected cell for UE fulfilling not-at-cell edge criterion in the test case.

For the test to pass, both events above shall pass.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

6.1.1.5 NR SA FR1-FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

6.1.1.5.1 Test purpose

The purpose of this test is to verify the requirement for the inter-frequency NR cell reselection requirements for UE fulfilling low mobility criterion specified in TS 38.133 [6] clause 4.2.2.10.2.

6.1.1.5.2 Test applicability

This test applies to all types of NR UE from release 16 onwards and supporting relaxed measurement.

6.1.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.1.5.

6.1.1.5.4 Test description

6.1.1.5.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 6.1.1.5.4.1-1.

Table 6.1.1.5.4.1-1: Supported test configurations for NR SA FR1-FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Configuration	Description of serving cell	Description of target cell
6.1.1.5-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.1.1.5-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.1.1.5-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 6.1.1.5.4.1-2.

Table 6.1.1.5.4.1-2: Initial conditions for NR SA FR1-FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.1.1.5.4.1-3.

2. Message contents are defined in clause 6.1.1.5.4.3.

3. There is 2 NR carriers and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 6.1.1.5.4.1-3: General test parameters for NR SA FR1-FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase, it fulfils Low Mobility relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2, 3	Cell1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T2 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB Configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB4 of Cell 1
				SMTC pattern 6	Configured in SIB4 of Cell 2
			2	SMTC pattern 1	

Parameter	Unit	Test configuration	Value	Comment
		3	SMTC pattern 1	
DRX cycle length	s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	25 s	T1 is defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	25 s	T2 is defined so that cell re-selection reaction time is taken into account.

6.1.1.5.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR Cell 1 and Cell 2 on different frequencies. The test consists of 2 successive time periods, with time duration of T1, and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 1.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2. SIB2 of Cell 1 and Cell 2 are configured as follows:

   lowMobilityEvaluation-r16 is configured according to the parameters listed in Table 6.1.1.5.5-1.

   cellEdgeEvaluation-r16 and *combineRelaxedMeasCondition* are not configured.

2. Set the parameters according to T2 in Table 6.1.1.5.5-1. Then wait 54s to ensure that Cell 2 has been detected by the UE.

3. Set the parameters according to T1 in Table 6.1.1.5.5-1. T1 starts.

4. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.

5. If the UE responds on Cell 1 within 17 seconds from the beginning of time period T1, then count a success for the event “Re-select Cell 1”. Otherwise count a fail for the event “Re-select Cell 1”.

6. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 7. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 13.

7. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

8. The SS shall switch the power setting from T1 to T2 as specified in Table 6.1.1.5.5-1. T2 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 2.

10. If the UE responds on Cell 2 within 17 seconds from the beginning of time period T2, then count a success for the event “Re-select Cell 2”. Otherwise count a fail for the event “Re-select Cell 2”.

11. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 12. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 13.

12. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2. skip to 14

13. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 in Cell 2.

14. Repeat step 2-13 until a test verdict has been achieved. Each of the events “Re-select Cell 2” and “Re-select Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated

only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

6.1.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:Table 6.1.1.5.4.3-1: SIB1 (Cell 1 and Cell 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
servingCellConfigCommon SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
pcch-Config SEQUENCE {			
defaultPagingCycle	rf64		
}			
}			
}			
}			

Table 6.1.1.5.4.3-2: SIB2 (Cell 1)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
threshServingLowP	22	Actual value = 22*2 = 44dB	
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16 SEQUENCE {			
s-SearchDeltaP-r16	dB3		
t-SearchDeltaP-r16	s5		
}			
cellEdgeEvaluation-r16	Not present		
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 6.1.1.5.4.3-3: SIB2 (Cell 2)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
threshServingLowP	23	Actual value = 23*2 = 46dB	Cell 2
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16 SEQUENCE {			
s-SearchDeltaP-r16	dB15		Cell 2
t-SearchDeltaP-r16	s5		
}			
cellEdgeEvaluation-r16	Not present		
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 6.1.1.5.4.3-4: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 2		
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		6.1.1.5-1
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		6.1.1.5-2, 6.1.1.5-3
deriveSSB-IndexFromCell	false		6.1.1.5-1
	true		6.1.1.5-2, 6.1.1.5-3
threshX-HighP	24	Actual value = 24*2 = 48dB	
threshX-LowP	24	Actual value = 24*2 = 48dB	
cellReselectionPriority	5	Same as the priority in SIB 2 of Cell 2.	
}			
}			
}			

Table 6.1.1.5.4.3-5: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 1 SSB		Cell 2
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.6		6.1.1.5-1
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		6.1.1.5-2, 6.1.1.5-3
deriveSSB-IndexFromCell	false		6.1.1.5-1
	true		6.1.1.5-2, 6.1.1.5-3
threshX-HighP	22	Actual value = 22*2 = 44dB	Cell 2
threshX-LowP	25	Actual value = 25*2 = 50dB	Cell 2
cellReselectionPriority	4	Same as the priority in SIB 2 of Cell 1.	Cell 2
}			
}			
}			

6.1.1.5.5 Test requirement

Tables 6.1.1.5.4.1-3 and 6.1.1.5.5-1 define the primary level settings including test tolerances for NR SA FR1-FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion test case.

Table 6.1.1.5.5-1: Cell specific test parameters for NR SA FR1-FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
Cell_selection_and_ reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1	14	14	-3.70	9.75
		2				
		3				
N_{oc} Note2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	14	14	-3.70	9.75
		2				
		3				
SS-RSRP Note3	dBm/SCS	1	-84	-84	-101.70	-88.25
		2	-84	-84	-101.70	-88.25
		3	-81	-81	-98.70	-85.25
Io	dBm/9.36 MHz	1	-55.88	-55.88	-68.50	-59.86
	dBm/9.36 MHz	2	-55.88	-55.88	-68.50	-59.86
	dBm/38.16 MHz	3	-49.79	-49.79	-62.40	-53.76

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Treselection	s	1, 2, 3	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	Not sent		Not sent	
$Thresh_{x, highP}$	dB	1, 2, 3	48		44	
$Thresh_{serving, lowP}$	dB	1, 2, 3	44		46	
$Thresh_{x, lowP}$	dB	1, 2, 3	48		50	
$S_{SearchDeltaP}$	dB	1, 2, 3	3		15	
$T_{SearchDeltaP}$	s	1, 2, 3	5		5	
Propagation Condition		1, 2, 3	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The cell re-selection delay to detected lower priority cell for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a detected cell test requirement for UE fulfilling low mobility criterion in this case is expressed as:

Cell re-selection delay to a detected lower priority cell = $T_{evaluate,NR_Inter} + T_{SI-NR}$

$T_{evaluate,NR_Inter}$ = 15.36 s; as specified in TS 38.133 [6] Table 4.2.2.10.2-1.

T_{SI-NR} = 1.28 s; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to an already detected lower priority cell for UE fulfilling low mobility criterion in the test case.

The cell re-selection delay to detected higher priority cell for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 1.

The cell re-selection delay to a detected higher priority cell test requirement for UE fulfilling low mobility criterion in this case is expressed as:

Cell re-selection delay to a detected higher priority cell = $T_{evaluate,NR_Inter} + T_{SI-NR}$

$T_{evaluate,NR_Inter}$ = 15.36 s; as specified in TS 38.133 [6] Table 4.2.2.10.2-1.

T_{SI-NR} = 1.28 s; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to an already detected higher priority cell for UE fulfilling low mobility criterion in the test case.

For the test to pass, both events above shall pass.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

6.1.1.6 NR SA FR1-FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

6.1.1.6.1 Test purpose

The purpose of this test is to verify the requirement for the inter-frequency NR cell reselection requirements for UE fulfilling not-at-cell edge criterion specified in TS 38.133 [6] clause 4.2.2.10.3.

6.1.1.6.2 Test applicability

This test applies to all types of NR UE from release 16 onwards and supporting relaxed measurement.

6.1.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.1.6.

6.1.1.6.4 Test description

6.1.1.6.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 6.1.1.6.4.1-1.

Table 6.1.1.6.4.1-1: Supported test configurations for NR SA FR1-FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Configuration	Description of serving cell	Description of target cell
6.1.1.6-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.1.1.6-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.1.1.6-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 6.1.1.6.4.1-2.

Table 6.1.1.6.4.1-2: Initial conditions for NR SA FR1-FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.1.1.6.4.1-3.

2. Message contents are defined in clause 6.1.1.6.4.3.

3. There is 2 NR carriers and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 6.1.1.6.4.1-3: General test parameters for NR SA FR1-FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase, it fulfils Not-at-cell edge relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2, 3	Cell1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T2 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB Configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB4 of Cell 1
				SMTC pattern 6	Configured in SIB4 of Cell 2
			2	SMTC pattern 1	
			3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	
T1		s	1, 2, 3	20 s	T1 is defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3	20 s	T2 is defined so that cell re-selection reaction time is taken into account.

6.1.1.6.4.2 Test procedure

Two cells are deployed in the test, which are FR1 NR Cell 1 and Cell 2 on different frequencies. The test consists of 2 successive time periods, with time duration of T1, and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 1.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2. SIB2 of Cell 1 and Cell 2 are configured as follows:
   - *cellEdgeEvaluation-r16* is configured according to the parameters listed in Table 6.1.1.6.5-1.
   - *lowMobilityEvaluation-r16* and *combineRelaxedMeasCondition* are not configured.
2. Set the parameters according to T2 in Table 6.1.1.6.5-1. Then wait 54s to ensure that Cell 2 has been detected by the UE.
3. Set the parameters according to T1 in Table 6.1.1.6.5-1. T1 starts.
4. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.

5. If the UE responds on Cell 1 within 17 seconds from the beginning of time period T1, then count a success for the event “Re-select Cell 1”. Otherwise count a fail for the event “Re-select Cell 1”.

6. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 7. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 13.

7. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

8. The SS shall switch the power setting from T1 to T2 as specified in Table 6.1.1.6.5-1. T2 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.

10. If the UE responds on Cell 2 within 17 seconds from the beginning of time period T2, then count a success for the event “Re-select Cell 2”. Otherwise count a fail for the event “Re-select Cell 2”.

11. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 12. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 13.

12. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2. skip to 14

13. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 in Cell 2.

14. Repeat step 2-13 until a test verdict has been achieved. Each of the events “Re-select Cell 2” and “Re-select Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

6.1.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.1.1.6.4.3-1: SIB1 (Cell 1 and Cell 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
servingCellConfigCommon SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
pcch-Config SEQUENCE {			
defaultPagingCycle	rf64		
}			
}			
}			
}			

Table 6.1.1.6.4.3-2: SIB2 (Cell 1)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16	Not present		
cellEdgeEvaluation-r16 SEQUENCE {	Not present		
s-SearchThresholdP-r16	25	Actual value = 25*2 = 50dB	
s-SearchThresholdQ-r16	Not present		
}			
combineRelaxedMeasCondition-r16	Not present		

highPriorityMeasRelax-r16	Not present		
}			
}			

Table 6.1.1.6.4.3-3: SIB2 (Cell 2)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16	Not present		
cellEdgeEvaluation-r16 SEQUENCE {	Not present		
s-SearchThresholdP-r16	17	Actual value = 17*2 = 34dB	
s-SearchThresholdQ-r16	Not present		
}			
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 6.1.1.6.4.3-4: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 2 SSB		
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		6.1.1.6-1
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		6.1.1.6-2, 6.1.1.6-3
deriveSSB-IndexFromCell	false		6.1.1.6-1
	true		6.1.1.6-2, 6.1.1.6-3
cellReselectionPriority	5	Same as the priority in SIB 2 of Cell 2.	
}			
}			
}			

Table 6.1.1.6.4.3-5: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 1 SSB		
smtc	SSB-MTC specified in 38.508-1 [14] Table		6.1.1.6-1

	7.3.1-3 with condition SMTC.6		
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		6.1.1.6-2, 6.1.1.6-3
deriveSSB-IndexFromCell	false		6.1.1.6-1
	true		6.1.1.6-2, 6.1.1.6-3
cellReselectionPriority	4	Same as the priority in SIB 2 of Cell 1.	Cell 2
}			
}			
}			

6.1.1.6.5 Test requirement

Tables 6.1.1.6.4.1-3 and 6.1.1.6.5-1 define the primary level settings including test tolerances for NR SA FR1-FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion test case.

Table 6.1.1.6.5-1: Cell specific test parameters for NR SA FR1-FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
$Qhyst_s$	dB	1, 2, 3	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3	0		0	
Cell_selection_and_ reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	1	16	14	-3.65	16
		2				
		3				
N_{oc} Note2	dBm/SCS	1	-98		-100	
		2	-98		-100	
		3	-95		-97	
N_{oc} Note2	dBm/15 kHz	1	-98		-100	

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	16	14	-3.65	16
		2				
		3				
SS-RSRP Note3	dBm/SCS	1	-82	-84	-103.65	-84
		2	-82	-84	-103.65	-84
		3	-79	-81	-100.65	-81
Io	dBm/9.36 MHz	1	-53.94	-55.88	-70.49	-55.94
	dBm/9.36 MHz	2	-53.94	-55.88	-70.49	-55.94
	dBm/38.16 MHz	3	-47.84	-49.79	-63.39	-49.84
Treselection	s	1, 2, 3	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	Not sent		Not sent	
$Thresh_{x, highP}$	dB	1, 2, 3	48		48	
$Thresh_{serving, lowP}$	dB	1, 2, 3	44		44	
$Thresh_{x, lowP}$	dB	1, 2, 3	50		50	
$S_{SearchThresholdP}$	dB	1, 2, 3	50		50	
$S_{SearchThresholdQ}$	dB	1, 2, 3	Not Configured			
Propagation Condition		1, 2, 3	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell re-selection delay to detected lower priority cell for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a detected cell test requirement for UE fulfilling not-at-cell edge criterion in this case is expressed as:

Cell re-selection delay to a detected lower priority cell = $T_{evaluate,NR_Inter} + T_{SI-NR}$

$T_{evaluate,NR_Inter}$ = 15.36 s; as specified in TS 38.133 [6] Table 4.2.2.10.2-1.

T_{SI-NR} = 1.28 s; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to an already detected lower priority cell for UE fulfilling not-at-cell edge criterion in the test case.

The cell re-selection delay to detected higher priority cell for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 1.

The cell re-selection delay to a detected higher priority cell test requirement for UE fulfilling not-at-cell edge criterion in this case is expressed as:

Cell re-selection delay to a detected higher priority cell = $T_{evaluate,NR_Inter} + T_{SI-NR}$

$T_{evaluate,NR_Inter}$ = 15.36 s; as specified in TS 38.133 [6] Table 4.2.2.10.2-1.

T_{SI-NR} = 1.28 s; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to an already detected higher priority cell for UE fulfilling not-at-cell edge criterion in the test case.

For the test to pass, both events above shall pass.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

6.1.1.7 NR SA FR1 cell re-selection for UE configured with highSpeedMeasFlag-r16

6.1.1.7.1 Test purpose

The purpose of this test is to verify that when the current and target cell operates on the same carrier frequency the UE configured with *highSpeedMeasFlag-r16* is able to search and measure cells to meet the intra-frequency NR cell re-selection requirements.

6.1.1.7.2 Test applicability

This test applies to all types of NR UE from release 15 onwards that supports measurement enhancements in high speed scenario

6.1.1.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.1.7.

6.1.1.7.4 Test description

6.1.1.7.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 6.1.1.7.4.1-1.

Table 6.1.1.7.4.1-1: Supported test configurations for NR SA FR1 cell re-selection for UE configured with highSpeedMeasFlag-r16

Configuration	Description
6.1.1.7-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.1.1.7-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.1.1.7-3	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.1.1.7.4.1-2.

Table 6.1.1.7.4.1-2: Initial conditions for NR SA FR1 cell re-selection for UE configured with highSpeedMeasFlag-r16

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.1.1.7.4.1-3.

2. Message contents are defined in clause 6.1.1.7.4.3.

3. There is one NR carrier and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 6.1.1.7.4.1-3: General test parameters for NR SA FR1 cell re-selection for UE configured with highSpeedMeasFlag-r16

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
T2 end condition	Active cell		1, 2, 3	Cell2	
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	0.32	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	
T1		s	1, 2, 3	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	1, 2, 3	10	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	1, 2, 3	9	T3 needs to be defined so that cell re-selection reaction time is taken into account.

6.1.1.7.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 3 successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. *highSpeedMeasFlag-r16* is broadcasted to UE.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Set Cell 2 physical cell identity = initial Cell 2 physical cell identity.

2. Set the parameters according to T1 in Table 6.1.1.7.5-1. T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for one iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.1.1.7.5-1. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 4 seconds from the beginning of time period T2, then count a success for the event “Re-select newly detected Cell 2”. Otherwise count a fail for the event “Re-select newly detected Cell 2”.

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 12.

7a The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 6.1.1.7.5-1. T3 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

10. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 3 seconds from the beginning of time period T3, then count a success for the event “Re-select already detected Cell 1”. Otherwise count a fail for the event “Re-select already detected Cell 1”.

11. If the UE has re-selected Cell 1 within T3, after the re-selection or when T3 expires, continues with step 11a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 12.

11a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

12. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

13. Repeat step 2-12 until a test verdict has been achieved.
Each of the events “Re-select newly detected Cell 2” and “Re-select already detected Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
If both events pass, the test passes. If one event fails, the test fails.

6.1.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.1.1.7.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks on condition of HighSpeedMeas with exceptions	Table H.2.1-1 with Condition SMTC.2 and Asynchronous cells for configuration 6.1.1.7-1 and Cell 1 Table H.2.1-1 with Condition SMTC.6 and Asynchronous cells for configuration 6.1.1.7-1 and Cell 2 Table H.2.1-1 with Condition SMTC.1 and synchronous cells for configuration 6.1.1.7-2 Table H.2.1-1 with Condition SMTC.1 and synchronous cells for configuration 6.1.1.7-3 Table H.2.1-2 Table H.2.1-3 with Condition HighSpeedMeas
Default RRC messages and information elements contents exceptions	

6.1.1.7.5 Test requirement

Tables 6.1.1.7.4.1-3 and 6.1.1.7.5-1 define the primary level settings including test tolerances for intra frequency NR cell re-selection test case for UE configured with highSpeedMeasFlag-r16.

Table 6.1.1.7.5-1: Cell specific test parameters for intra frequency NR cell re-selection test case for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.2.1-1			OP.1 defined in A.2.1-1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
$Qhyst_s$	dB	1, 2, 3	0			0		
$Qoffset_{s,n}$	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s/I_{ot}$	dB	1	16	-3.55	3.24	-infinity	3.24	-3.55
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
$\hat{E}_s / N_{oc}$	dB	1	16	13	16.45	-infinity	16.45	13
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-82	-85	81.55	-infinity	-81.55	-85
		2	-82	-85	-81.55	-infinity	-81.55	-85
		3	-79	-82	-78.54	-infinity	-78.54	-82
Io	dBm/9.36 MHz	1	-53.94	-51.91	-51.91	specified in Cell 1 columns-		
	dBm/9.36 MHz	2	-53.94	-51.91	-51.91			
	dBm/38.16 MHz	3	-47.85	-45.81	-45.81			
Treselection	s	1, 2, 3	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3	60			60		
Propagation Condition		1, 2	AWGN			AWGN 1944Hz Note4		
Propagation Condition		3	AWGN			AWGN 3334Hz Note5		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The AWGN 1944 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.
Note 5: The AWGN 3334 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 3334 Hz.

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell test requirement in this case is expressed as:

Cell re-selection delay to a newly detectable cell = $T_{detect,NR_Intra} + T_{SI-NR}$

T_{detect,NR_Intra} = 2.56 s; as specified in Table 4.2.2.3-2 in clause 4.2.2.3 TS 38.133 [6].

T_{SI-NR} = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

The cell re-selection delay to a newly detectable cell shall be less than a total of 3.84 seconds in this test case (note: this gives a total of 3.84 seconds but the test allows 4 seconds).

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell test requirement in this case is expressed as:

Cell re-selection to an already detected cell delay = $T_{evaluate,NR_Intra} + T_{SI-NR}$

$T_{evaluate,NR_Intra}$ = 0.96 s; as specified in Table 4.2.2.3-2 in clause 4.2.2.3 TS 38.133 [6].

T_{SI-NR} = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

The cell re-selection delay to an already detected cell shall be less than a total of 2.24 seconds in this test case (note: this gives a total of 2.24 seconds but the test allows 3 seconds).

For the test to pass, both events above shall pass.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

6.1.1.8 NR SA FR1-FR1 Cell reselection for UE configured with highSpeedMeasInterFreq-r17

6.1.1.8.1 Test purpose

The purpose of this test is to verify the requirement for the inter frequency NR cell reselection requirements for UE configured with *highSpeedMeasInterFreq-r17* specified in TS 38.133 [6] in clause 4.2.2.4.

6.1.1.8.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting the high-speed inter-frequency IDLE/INACTIVE measurements.

6.1.1.8.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.1.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.1.8

6.1.1.8.4 Test description

6.1.1.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.1.1.8.4.1-1.

Table 6.1.1.8.4.1-1: Supported test configurations for NR SA FR1-FR1 Cell reselection for UE configured with highSpeedMeasInterFreq-r17

Configuration	Description of serving cell	Description of target cell
6.1.1.8-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.1.1.8-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.1.1.8-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 6.1.1.8.4.1-2.

Table 6.1.1.8.4.1-2: Initial conditions for NR SA FR1-FR1 Cell reselection for UE configured with highSpeedMeasInterFreq-r17

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.1.1.8.4.1-3.
2. Message contents are defined in clause 6.1.1.8.4.3.
3. There is two NR carrier and 2 NR Cells specified in the test. Cell 2 is the PCell and Cell 1 is the neighbour cell in a different carrier than cell 2. Cell 1 and Cell 2 are configured according to Annex C.1.2.

Table 6.1.1.8.4.1-3: General test parameters for NR SA FR1-FR1 Cell reselection for UE configured with highSpeedMeasInterFreq-r17

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3	Cell 1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 during T3
	Neighbour cell		1, 2, 3	Cell 1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	0.32	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	
T1		s	1, 2, 3	10	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	1, 2, 3	12	T3 needs to be defined so that cell re-selection reaction time is taken into account.

6.1.1.8.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one of the NR carriers. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Cell 2 is of higher priority than cell 1.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

2. Set the parameters according to T1 in Table 6.1.1.8.5-1. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.

4. If the UE responds on Cell 1 during time duration T1 within 3 seconds from the beginning of time period T1, then count a success for the event “Re-select Cell 1”. Otherwise count a fail for the event “Re-select Cell 1”.

5. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 13.

6. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

7. The SS shall switch the power setting from T1 to T2 as specified in Table 6.1.1.8.5-1. T2 starts. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) shall be changed to ensure Cell 2 is not detected by the UE.

8. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 6.1.1.8.5-1. T3 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection on cell 2.

10. If the UE responds on Cell 2 during time duration T3 within 5 seconds from the beginning of time period T3, then count a success for the event “Re-select Cell 2”. Otherwise count a fail for the event “Re-select Cell 2”.

11. If the UE has re-selected Cell 2 within T3, after the re-selection or when T3 expires, continue with step 12. Otherwise, if T3 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 13.

12. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

13. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

14. Repeat step 2-13 until a test verdict has been achieved.
    Each of the events “Re-select Cell 1” and “Re-select Cell 2” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

6.1.1.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.1.1.8.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.2-1 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.2 and Asynchronous cells for configuration 6.1.1.8-1 and Cell 1 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.6 and Asynchronous cells for configuration 6.1.1.8-1 and Cell 2 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.1 and synchronous cells for configuration 6.1.1.8-2 Table H.2.2-2 with Condition SSB.2 FR1, SMTC.1 and synchronous cells for configuration 6.1.1.8-3 Table H.2.2-3
Default RRC messages and information elements contents exceptions	

Table 6.1.1.8.4.3-2: *SIB4*: NR inter frequency cell re-selection with highSpeedMeasInterFreq-r17

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
InterFreqCarrierFreqInfo-v1700 ::= SEQUENCE {			
highSpeedMeasInterFreq-r17	TRUE		

}			
}			

6.1.1.8.5 Test requirement

Table 6.1.1.8.5-1 defines the primary level settings including test tolerances for EN-DC FR1 interruptions at SRS carrier based switching in asynchronous EN-DC.

Table 6.1.1.8.5-1: NR cell specific test parameters for NR SA FR1-FR1 Cell reselection for UE configured with highSpeedMeasInterFreq-r17

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	15.6	15.6	15.6	-3.6	-infinity	13.6
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98			-100	-98	-98
		2	-98			-100	-98	-98
		3	-95			-97	-95	-95
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	15.6	15.6	15.6	-3.6	-infinity	13.6
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-82.4	-82.4	-82.4	-103.6	-infinity	-84.4
		2	-82.4	-82.4	-82.4	-103.6	-infinity	-84.4
		3	-79.39	-79.39	-79.39	-100.59	-infinity	-81.39
Io	dBm/9.36 MHz	1	-54.33	-54.33	-54.33	-70.46	-infinity	-56.26
	dBm/9.36 MHz	2	-54.33	-54.33	-54.33	-70.46	-infinity	-56.26
	dBm/38.16 MHz	3	-48.23	-48.23	-48.23	-67.37	-infinity	-53.17
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	50			50		
$Thresh_{x, highP}$	dB	1, 2, 3	48			48		
$Thresh_{serving, lowP}$	dB	1, 2, 3	44			44		
$Thresh_{x, lowP}$	dB	1, 2, 3	50			50		
Propagation Condition		1, 2	AWGN			AWGN 1944Hz Note4		

Propagation Condition		3	AWGN	AWGN 3334Hz[Note5]

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The AWGN 1944 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.
Note 5: The AWGN 3334 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 3334 Hz.

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 5 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 3 s.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

6.1.1.9 NR SA FR1 cell re-selection for UE operating on a cell with less than 5MHz BW

6.1.1.9.1 Test Purpose

The purpose of this test is to verify the requirement for intra-frequency NR cell reselection requirements specified in TS 38.133 [6] clause 4.2.2.3 for UE capable of operating on a cell with less than 5MHz BW.

6.1.1.9.2 Test applicability

This test applies to all types of NR UE release 18 onwards supporting less than 5 MHz BW.

6.1.1.9.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.1.1.0.1

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.1.9.

6.1.1.9.4 Test description

6.1.1.9.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 6.1.1.9.4.1-1.

Table 6.1.1.9.4.1-1: Supported test configurations

Configuration	Description
6.1.1.9-1	FDD duplex mode, 15 kHz SSB SCS, 3 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 6.1.1.9.4.1-2.

Table 6.1.1.9.4.1-2: Initial conditions for NR SA FR1 cell re-selection

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.9.4.1-1.	

Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. General test parameters as specified in Table 6.1.1.1.4.1-3 with config 1 apply except those specified in Table 6.1.1.9.4.1-3.

2. Message contents are defined in clause 6.1.1.9.4.3.

3. There is one NR carrier and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 6.1.1.9.4.1-3: General test parameters for intra frequency NR cell re-selection test case

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
BWchannel	MHz	Config 1	3: $N_{RB,c}$ = 12	
SSB Configuration		Config 1	SSB.13	

6.1.1.9.4.2 Test procedure

Same as 6.1.1.1.4.2.

6.1.1.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.1.1.9.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 6.1.1.9.4.3-2: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-65	-130 is actual value in dBm (-65 * 2 dBm)	6.1.1.9-1
}			
}			

Table 6.1.1.9.4.3-3: SIB2 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
q-RxLevMin	-65	Actual value is -65*2 = -130dBm	6.1.1.9-1
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		6.1.1.9-1 AND Cell 1

	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.6		6.1.1.9-1 AND Cell 2
deriveSSB-IndexFromCell	false		6.1.1.9-1
}			
}			

6.1.1.9.5 Test requirements

Tables 6.1.1.1.4.1-3 and 6.1.1.1.5-1 define the primary level settings including test tolerances for intra frequency NR cell re-selection test case. Cell specific test parameters as specified in Table 6.1.1.1.5-1 with test configuration 6.1.1.9-1 apply except those specified in Table 6.1.1.9.5-1.

Table 6.1.1.9.5-1: Cell specific test parameters for intra-frequency NR cell re-selection test case

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
PDSCH RMC		6.1.1.9-1	SR.1.2 FDD			SR.1.2 FDD		
RMSI CORESET		6.1.1.9-1	CR.1.2 FDD			CR.1.2 FDD		
Dedicated CORESET		6.1.1.9-1	CCR.1.6 FDD			CCR.1.6 FDD		
Io	dBm/2.7 MHz	6.1.1.9-1	-60.31	-58.28	-58.28	Specified in Cell 1 columns		
$\hat{E}_s / N_{oc}$	dB	6.1.1.9-1	16	13	16.45	-infinity	16.45	13

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 34 s for UE operating on a cell with less than 5MHz BW.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 8 s for UE operating on a cell with less than 5MHz BW.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_ intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} + 40ms See Table 4.2.2.3-1 in TS 38.133 [6] clause 4.2.2.3

$T_{evaluate, NR_ intra}$ See Table 4.2.2.3-1 in TS 38.133 [6] clause 4.2.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that need to be received by the UE to camp on a cell; 1320ms is assumed in this test case.

This gives a total of 33.36 s, allow 34 s for the cell re-selection delay to a newly detectable cell and 7.76 s for the cell re-selection delay to an already detected cell in the test case, which we allow 8 s.

6.1.2 NR – E-UTRA cell re-selection

6.1.2.0 Minimum conformance requirements

6.1.2.0.1 Minimum conformance requirements for NR – E-UTRA cell re-selection

The cell re-selection delay to a higher priority cell shall be less than $T_{higher_priority_search} + T_{evaluate, EUTRAN} + T_{SI\text{-}E\text{-}UTRA}$ in RRC_IDLE state.

The cell re-selection delay to a lower priority E-UTRA cell shall be less than $T_{evaluate, E\text{-}UTRAN} + T_{SI\text{-}E\text{-}UTRA}$ in RRC_IDLE state.

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-RAT E-UTRAN layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2 of TS 38.133 [6].

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-RAT E-UTRAN layers of higher, lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT E-UTRAN layers shall be the same as that defined below for lower priority RATs.

The requirements in this section apply for inter-RAT E-UTRAN FDD measurements and E-UTRA TDD measurements. When the measurement rules indicate that inter-RAT E-UTRAN cells are to be measured, the UE shall measure RSRP and RSRQ of detected E-UTRA cells in the neighbour frequency list at the minimum measurement rate specified in this section. The parameter $N_{EUTRA_carrier}$ is the total number of configured E-UTRA carriers in the neighbour frequency list. The UE shall filter RSRP and RSRQ measurements of each measured E-UTRA cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,EUTRAN}/2$.

The parameter $N_{EUTRA_carrier}$ is the total number of configured E-UTRA carriers indicated to meet non high speed requirements in the neighbour frequency list. The parameter $N_{EUTRA_carrier_HST}$ is the total number of configured E-UTRA carriers indicated to meet high speed requirements in the neighbour frequency list. If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$, an inter-RAT E-UTRAN layer is indicated to meet high speed requirements if highSpeedMeasFlag-r16 is configured and the carrier to be measured is configured with highSpeedEUTRACarrier-r16 and UE supports the enhanced inter-RAT E-UTRAN measurement requirements. If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$, UE is required to meet non high speed requirements no matter whether highSpeedMeasFlag-r16 or highSpeedEUTRACarrier-r16 is configured or not.

An inter-RAT E-UTRA cell is considered to be detectable provided the following conditions are fulfilled:

- the same conditions as for inter-frequency RSRP measurements specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band, and
- the same conditions as for inter-frequency RSRQ measurements specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band.
- SCH conditions specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band.

The UE shall be able to evaluate whether a newly detectable inter-RAT E-UTRAN cell meets the reselection criteria defined in TS38.304 [1] within $N_{EUTRA_carrier_HST} * T_{detect,EUTRAN_HST} + N_{EUTRA_carrier} * T_{detect,EUTRAN}$ when Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities.

Cells which have been detected shall be measured at least every $(N_{EUTRA_carrier}) * T_{measure,EUTRAN}$ when Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,EUTRAN}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this section shall still be met by the UE before it makes any determination that it may stop measuring the cell.

If the UE detects on an inter-RAT E-UTRAN carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall not consider an inter-RAT E-UTRA cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For a cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified inter-RAT E-UTRA cell has met reselection criterion defined in TS 38.304 [30] within ($N_{EUTRA_carrier}$) * $T_{evaluate,EUTRAN}$ when $T_{reselection}$ = 0 as specified in table 4.2.2.5-1 of TS 38.133 [6] provided that the reselection criteria is met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities.

If $T_{reselection}$ timer has a non-zero value and the inter-RAT E-UTRA cell is satisfied with the reselection criteria which are defined in TS 38.304 [30], the UE shall evaluate this E-UTRA cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The normative reference for this requirement is TS 38.133 [6] clause 4.2.2.5.

Table 6.1.2.0.1-1: $T_{detect,EUTRAN}$, $T_{measure,EUTRAN}$, and $T_{evaluate,EUTRAN}$

DRX cycle length [s]	$T_{detect,EUTRAN}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN}$ [s] (number of DRX cycles)
0.32	11.52 (36)	1.28 (4)	5.12 (16)
0.64	17.92 (28)	1.28 (2)	5.12 (8)
1.28	32(25)	1.28 (1)	6.4 (5)
2.56	58.88 (23)	2.56 (1)	7.68 (3)

Table 6.1.2.0.1-2: $T_{detect,EUTRAN_HST}$, $T_{measure,EUTRAN_HST}$, and $T_{evaluate,EUTRAN_HST}$ for UE configured with highSpeedMeasFlag-r16

DRX cycle length [s]	$T_{detect,EURAN_HST}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_HST}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_HST}$ [s] (number of DRX cycles)
0.32	4.16 (13)	0.64 (2)	0.96 (3)
0.64	7.68 (12)	1.28 (2)	1.92 (3)
1.28	8.96 (7)	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)
Note 1: When highSpeedMeasFlag-r16 is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[interRAT-MeasurementEnhancement-r16]*.			

The requirements in Table 6.1.2.0.1-2 apply only when the UE supports *measurementEnhancement-r16* or *interRAT-MeasurementEnhancement-r16*. For UE not supporting either *measurementEnhancement-r16* or *interRAT-MeasurementEnhancement-r16*, the UE is not required to meet the requirements specified in Table 6.1.2.0.1-2.

6.1.2.0.2 Minimum conformance requirement for inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion

6.1.2.0.2.1 Introduction

This clause contains the requirements for measurements on inter-RAT E-UTRAN cells when the UE is configured with any of following relaxed measurement critera:

- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in TS 38.304 [30],
- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4.9.2 in TS 38.304 [30],
- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4.9.1 and 5.2.4.9.2 in TS 38.304 [30] respectively.

6.1.2.0.2.2 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- T331 timer is not running for EMR measurements on inter-RAT E-UTRAN, and

- UE is configured with *lowMobilityEvalutation* [13] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvalutation* [13] criterion and *cellEdgeEvaluation* [13] criterion and *combineRelaxedMeasCondition* [13] not configured, and
- UE has fulfilled only the *lowMobilityEvalutation* [13] criterion.

When Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the requirements defined in clause 6.1.2.0.1 apply for this clause except that:

- $T_{detect,EUTRAN}$ as specified in Table 6.1.2.0.2.2-1.
- $T_{measure,EUTRAN}$ as specified in Table 6.1.2.0.2.2-1.
- $T_{evaluate,EUTRAN}$ as specified in Table 6.1.2.0.2.2-1.

When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ and the UE is configured with *highPriorityMeasRelax* [13] then the UE shall search for E-UTRA inter-RAT frequency layers of higher priority at least every K2*$T_{higher_priority_search}$ seconds where $T_{higher_priority_search}$ is described in clause 4.2.2.7 of TS 38.133 [6] and, K2 = 60. Otherwise if the UE is not configured with *highPriorityMeasRelax* [13] then the UE shall search for E-UTRA inter-RAT frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 of TS 38.133 [6].

Table 6.1.2.0.2.2-1: $T_{detect,EUTRAN}$, $T_{measure,EUTRAN}$, and $T_{evaluate,EUTRAN}$

DRX cycle length [s]	$T_{detect,EUTRAN}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN}$ [s] (number of DRX cycles)
0.32	11.52 x K1 (36 x K1)	1.28 x K1 (4 x K1)	5.12 x K1 (16 x K1)
0.64	17.92 x K1 (28 x K1)	1.28 x K1 (2 x K1)	5.12 x K1 (8 x K1)
1.28	32 x K1 (25 x K1)	1.28 x K1 (1 x K1)	6.4 x K1 (5 x K1)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)
Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvalutation* [13] criterion.			

6.1.2.0.2.3 Measurements for UE fulfilling with not-at-cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- T331 timer is not running for EMR measurements on inter-RAT E-UTRAN, and
- UE is configured with *cellEdgeEvaluation* [13] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvalutation* [13] criterion and *cellEdgeEvaluation* [13] criterion and *combineRelaxedMeasCondition* [13] not configured, and
- UE has fulfilled only the *cellEdgeEvaluation* [13] criterion.

When Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the requirements defined in clause 6.1.2.0.1 apply for this clause except that:

- $T_{detect,EUTRAN}$ as specified in Table 6.1.2.0.2.3-1.
- $T_{measure,EUTRAN}$ as specified in Table 6.1.2.0.2.3-1.
- $T_{evaluate,EUTRAN}$ as specified in Table 6.1.2.0.2.3-1.

When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ and regardless of whether the UE is configured with *highPriorityMeasRelax* [13] or not, the UE shall search for inter-RAT E-UTRAN frequency layers of higher priority at least every $T_{higher_priority_}$search where $T_{higher_priority_search}$ is described in clause 4.2.2.7 of TS 38.133 [6].

Table 6.1.2.0.2.3-1: $T_{detect,EUTRAN}$, $T_{measure,EUTRAN}$, and $T_{evaluate,EUTRAN}$

DRX cycle length [s]	$T_{detect,EUTRAN}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN}$ [s] (number of DRX cycles)

0.32	11.52 x K1 (36 x K1)	1.28 x K1 (4 x K1)	5.12 x K1 (16 x K1)
0.64	17.92 x K1 (28 x K1)	1.28 x K1 (2 x K1)	5.12 x K1 (8 x K1)
1.28	32 x K1 (25 x K1)	1.28 x K1 (1 x K1)	6.4 x K1 (5 x K1)
2.56	58.88 x K1 (23 x K1)	2.56 x K1 (1 x K1)	7.68 x K1 (3 x K1)
Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvalutation* [13] criterion.			

6.1.2.0.2.4 Measurements for UE fulfilling low mobility and not-at-cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- T331 timer is not running for EMR measurements on inter-RAT E-UTRAN, and
- UE is configured with both *lowMobilityEvalutation* [13] criterion and *cellEdgeEvaluation* [13] criterion, and
- has also fulfilled both criteria, and
- less than 1 hour have passed since measurements for cell reselection were last performed,

In this case the UE is not required to meet $T_{detect,EUTRAN}$, $T_{measure,EUTRAN}$ and $T_{evaluate,EUTRAN}$ as defined in Table 6.1.2.0.1-1.

The normative reference for this requirement is TS 38.133 [6] clause 4.2.2.11.

6.1.2.1 NR SA FR1 – E-UTRA cell re-selection to higher priority E-UTRA

6.1.2.1.1 Test purpose

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2.2.5 of TS 38.133 [6] when the E-UTRAN cell is of higher priority.

6.1.2.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.1.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.2.1.

6.1.2.1.4 Test description

6.1.2.1.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 6.1.2.1.4.1-1.

Table 6.1.2.1.4.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
6.1.2.1-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode
6.1.2.1-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode
6.1.2.1-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode
6.1.2.1-4	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode
6.1.2.1-5	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode
6.1.2.1-6	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test requirement and the DUT according to the parameters in Table 6.1.2.1.4.1-2.

Table 6.1.2.1.4.1-2: Initial conditions for NR SA FR1 – E-URTA cell re-selection to higher priority E-UTRA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 6.1.2.1.4.1-3.

2. Message contents are defined in clause 6.1.2.1.4.3.

3. The test scenario comprises of one NR cell and one E-UTRAN cell. Cell 1 is the NR PCell and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 6.1.2.1.4.1-3: General test parameters for NR to higher priority E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211
			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2		s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	1, 2, 3, 4, 5, 6	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

6.1.2.1.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an E-UTRA neighbour cell (Cell 2). The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. NR cell 1 is already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of higher priority than cell 1.

Before T1 the UE is camped on to cell 1. During T1, cell 2 shall be powered off. At the start of T2 the UE is expected to detect cell 2, send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a

Tracking Area Update procedure on cell 2. At the start of T3 cell 2 becomes weaker than cell 1, and the UE reselects to Cell 1.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

2. Set the parameters according to T1 in Table 6.1.2.1.5-1 and 6.1.2.1.5-2. T1 starts.

3. During T1, Cell 2 shall be powered off and set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for one iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.1.2.1.5-1 and 6.1.2.1.5-2. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a higher priority cell, Cell 2.

6. If the UE responds on Cell 2 during time duration T2 within 68 seconds from the beginning of time period T2, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11.

7a The SS shall send an *RRCConnectionRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 6.1.2.1.5-1 and 6.1.2.1.5-2. T3 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to a lower priority cell, Cell 1.

10. If the UE has re-selected Cell 1 within T3, after the re-selection or when T3 expires, continue with step 10a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.

10a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5.

12. Repeat step 2-11 until a test verdict has been achieved.

6.1.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.1.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.3-1 Table H.2.3-2 with Condition SMTC 1 and higher priority for configuration 6.1.2.1-2, 6.1.2.1-3, 6.1.2.1-5 and 6.1.2.1-6 Table H.2.3-2 with Condition SMTC 2 and higher priority for configuration 6.1.2.1-1 and 6.1.2.1-4 Table H.2.3-3 with Condition higher priority
Default RRC messages and information elements contents exceptions	

Table 6.1.2.1.4.3-2: SystemInformationBlockType3

Derivation Path: TS 36.508 [25] Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
threshServingLow	22	Actual value = 44 dB	
cellReselectionPriority	5		higher priority E-UTRA
}			
}			

Table 6.1.2.1.4.3-3: SystemInformationBlockType24

Derivation Path: TS 36.508 [25] Table 4.4.3.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
cellReselectionPriority-r15[*n*]	4		higher priority E-UTRA
threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
}			
}			

6.1.2.1.5 Test requirement

Tables 6.1.2.1.4.1-3, 6.1.2.1.5-1 and 6.1.2.1.5-2 define the primary level settings including test tolerances for higher priority E-UTRA cell re-selection test case.

Table 6.1.2.1.5-1: Cell specific test parameters for NR cell 1

Parameter	**Unit**	**Test configuration**	**Cell 1**		
			T1	**T2**	**T3**
TDD configuration		1, 4	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH parameters		1, 4	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET parameters		1, 4	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
Dedicated CORESET parameters		1, 4	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
SSB parameters		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
NR SMTC parameters		1, 4	SMTC 2		
		2, 5	SMTC 1		
		3, 6	SMTC 1		
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.2.1-1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
N_{oc}	dBm/SCS	1, 4	-98		
		2, 5	-98		

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
		3, 6	-95		
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98		
SS-RSRP	dBm/SCS	1, 4	-84	-82.4	-82.4
		2, 5	-84	-82.4	-82.4
		3, 6	-81	-79.39	-79.39
$\hat{E}_s/I_{ot}$	dB	1, 4	14	15.6	15.6
		2, 5			
		3, 6			
$\hat{E}_s/N_{oc}$	dB	1, 4	14	15.6	15.6
		2, 5			
		3, 6			
Io	dBm/9.36 MHz	1, 4	-55.88	-54.33	-54.33
	dBm/9.36 MHz	2, 5	-55.88	-54.33	-54.33
	dBm/38.16 MHz	3, 6	-49.79	-48.23	-48.23
Treselection	S	1, 2, 3, 4, 5, 6	0		
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	50		
$Thresh_{x, highP}$ (Note 2)	dB	1, 2, 3, 4, 5, 6	48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6	44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4, 5, 6	50		
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: This refers to the value of threshX-High which is included in NR system information, and is a threshold for the E-UTRA target cell.					

Table 6.1.2.1.5-2: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc}	dBm/15 kHz	-98	-98	-100
RSRP	dBm/15 KHz	-infinity	-84.4	-103.6
$\hat{E}_s/I_{ot}$	dB	-infinity	13.6	-3.6
$\hat{E}_s/N_{oc}$	dB	-infinity	13.6	-3.6
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	Not sent		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$ (Note 2)	dB	50		
Propagation Condition		AWGN		

Parameter	Unit	Cell 2		
		T1	T2	T3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: This refers to the value of threshX-Low-r15 which is included in E-UTRA system information, and is a threshold for the NR target cell.				

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate,\ E\text{-}UTRAN} + T_{SI\text{-}E\text{-}UTRA}$,

Where:

$T_{higher_priority_search}$ See clause 4.2.2.7 of TS 38.133 [6]

$T_{evaluate,\ E\text{-}UTRAN}$ See Table 4.2.2.5-1 in clause 4.2.2.5 of TS 38.133 [6]

$T_{SI\text{-}E\text{-}UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority E-UTRAN cell.

6.1.2.2 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA

6.1.2.2.1 Test purpose

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2.2.5 of TS 38.133 [6] when the E-UTRAN cell is of lower priority.

6.1.2.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.1.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.2.2.

6.1.2.2.4 Test description

6.1.2.2.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 6.1.2.2.4.1-1.

Table 6.1.2.2.4.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
6.1.2.2-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode
6.1.2.2-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode
6.1.2.2-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode
6.1.2.2-4	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode
6.1.2.2-5	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode

6.1.2.2-6	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equirement and the DUT according to the parameters in Table 6.1.2.2.4.1-2.

Table 6.1.2.2.4.1-2: Initial conditions for NR SA FR1 – E-URTA cell re-selection to lower priority E-UTRA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 6.1.2.2.4.1-3.

2. Message contents are defined in clause 6.1.2.2.4.3.

3. The test scenario comprises of one NR cell and one E-UTRAN cell. Cell 1 is the NR PCell and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 6.1.2.2.4.1-3: General test parameters for NR to lower priority E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211
			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

6.1.2.2.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an E-UTRA neighbour cell (Cell 2). The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

1a. Set the parameters according to T2 in Table 6.1.2.2.5-1 and 6.1.2.2.5-2. SS waits at least for 32sec($T_{detect,EUTRAN}$) to ensure the UE can detect E-UTRA neighbor cell(Cell2).

2. Set the parameters according to T1 in Table 6.1.2.2.5-1 and 6.1.2.2.5-2. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.

4. If the UE responds on Cell 2 during time duration T1 within 8 seconds from the beginning of time period T1 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

5. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 5a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 9.

5a The SS shall send an *RRCConnectionRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 6.1.2.2.5-1 and 6.1.2.2.5-2. T2 starts.

7. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 1.

8. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 8a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch on and off the UE and skip to step 9.

8a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

9. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5.

9a. Set the parameters according to T2 in Table 6.1.2.2.5-1 and 6.1.2.2.5-2. SS waits at least for 32sec($T_{detect,EUTRAN}$) to ensure the UE can detect E-UTRA neighbor cell(Cell2).

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.1.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.1.2.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.3-1 Table H.2.3-3 with Condition lower priority
Default RRC messages and information elements contents exceptions	

Table 6.1.2.2.4.3-1A: SIB2

Derivation Path: Table H.2.3-2 with condition lower priority			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present	UE applies the default value of infinity	
}			
intraFreqCellReselectionInfo SEQUENCE {			

smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		6.1.2.2-2, 6.1.2.2-3, 6.1.2.2-5, 6.1.2.2-6
	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		6.1.2.2-1, 6.1.2.2-4,
}			
}			

Table 6.1.2.2.4.3-2: SystemInformationBlockType3

Derivation Path: TS 36.508 [25] Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
threshServingLow	22	Actual value = 44 dB	
cellReselectionPriority	4		lower priority E-UTRA
}			
}			

Table 6.1.2.2.4.3-3: SystemInformationBlockType24

Derivation Path: TS 36.508 [25] Table 4.4.3.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
cellReselectionPriority-r15[*n*]	5		lower priority E-UTRA
threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
}			
}			

6.1.2.2.5 Test requirement

Tables 6.1.2.2.4.1-3, 6.1.2.2.5-1 and 6.1.2.2.5-2 define the primary level settings including test tolerances for lower priority E-UTRA cell re-selection test case.

Table 6.1.2.2.5-1: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	

SMTC configuration		1, 4	SMTC pattern 2	
		2, 5	SMTC pattern 1	
		3, 6	SMTC pattern 1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.2.1-1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-100	-98
		2, 5	-100	-98
		3, 6	-97	-95
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-100	-98
SS-RSRP	dBm/SCS	1, 4	-103.6	-84.4
		2, 5	-103.6	-84.4
		3, 6	-100.59	-81.39
$\hat{E}_s / I_{ot}$	dB	1, 4	-3.6	13.6
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4	-3.6	13.6
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4	-70.46	-56.26
	dBm/9.36 MHz	2, 5	-70.46	-56.26
	dBm/38.16 MHz	3, 6	-64.38	-50.16
Treselection	S	1, 2, 3, 4, 5, 6	0	
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	Not sent	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6	44	
$Thresh_{x, low P (Note 2)}$	dB	1, 2, 3, 4, 5, 6	50	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: This refers to the value of $Thresh_{x, LowP}$ which is included in NR system information, and is a threshold for the E-UTRA target cell				

Table 6.1.2.2.5-2: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2 T3
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-82.4	-84

$\hat{E}_s / I_{ot}$	dB	15.6	14
$\hat{E}_s / N_{oc}$	dB	15.6	14
$Treselection_{EUTRAN}$	S	0	
SnonintrasearchP	dB	Not sent	
$Thresh_{x, highP}$ (Note 2)	dB	48	
$Thresh_{serving, lowP}$	dB	44	
$Thresh_{x, lowP}$	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, highP}$ which is included in E-UTRA system information, and is a threshold for the NR target cell			

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN} + T_{SI-E-UTRA}$,

Where:

$T_{evaluate, E-UTRAN}$ See Table 4.2.2.5-1 in clause 4.2.2.5 of TS 38.133 [6]

$T_{SI-E-UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s for the cell re-selection delay to a lower priority E-UTRAN cell.

6.1.2.3 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRAN for UE fulfilling low mobility relaxed measurement criterion

6.1.2.3.1 Test purpose

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection when UE fulfils the low mobility criterion specified in clause 4.2.2.11.2 of TS 38.133 [6] and the E-UTRAN cell is of lower priority.

6.1.2.3.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards supporting relaxed RRM measurement.

6.1.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.2.3.

6.1.2.3.4 Test description

6.1.2.3.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 6.1.2.3.4.1-1.

Table 6.1.2.3.4.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
6.1.2.3-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode
6.1.2.3-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode

6.1.2.3-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode
6.1.2.3-4	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode
6.1.2.3-5	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode
6.1.2.3-6	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test requirement and the DUT according to the parameters in Table 6.1.2.3.4.1-2.

Table 6.1.2.3.4.1-2: Initial conditions for NR SA FR1 – E-URTA cell re-selection to lower priority E-UTRA for UE fulfilling low mobility relaxed measurement criterion

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 6.1.2.3.4.1-3.

2. Message contents are defined in clause 6.1.2.3.4.3.

3. The test scenario comprises of one NR cell and one E-UTRAN cell. Cell 1 is the NR PCell and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 6.1.2.3.4.1-3: General test parameters for NR to lower priority E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase, it fulfils Low Mobility relaxation measurements criterion, and during T1 period the UE reselects to cell 2.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 with higher priority during T2 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	0.64	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211
			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6	24	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6	24	T2 needs to be defined so that cell re-selection reaction time is taken into account.

6.1.2.3.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an E-UTRA neighbour cell (Cell 2). The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

The UE is configured with the relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in TS 38.304 [30]. So, Cell 1 configures the UE as follows:

- *lowMobilityEvalutation* [13] criterion is configured according to the parameters listed in Table 6.1.2.3.5-1;
- *cellEdgeEvaluation* [13] criterion is not configured;
- *combineRelaxedMeasCondition* [13] is not configured

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling low mobility criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 6.1.2.3.5-1 and 6.1.2.3.5-2. T1 starts.
3. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.
4. If the UE responds on Cell 2 during time duration T1 within 17 seconds from the beginning of time period T1 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
5. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11.

6 The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE.

7. The SS shall switch the power setting from T1 to T2 as specified in Table 6.1.2.3.5-1 and 6.1.2.3.5-2. T2 starts.
8. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 1.
9. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 10. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.

10 The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE, and then skip to step 12.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR according to TS 38.508-1 [14] clause 4.5.
12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.1.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.1.2.3.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	Table H.2.3-1 Table H.2.3-2 with Condition SMTC 1 and lower priority for configuration 6.1.2.3-2, 6.1.2.3-3, 6.1.2.3-5 and 6.1.2.3-6 Table H.2.3-2 with Condition SMTC 2 and lower priority for configuration 6.1.2.3-1 and 6.1.2.3-4 Table H.2.3-3 with Condition lower priority
Default RRC messages and information elements contents exceptions	Table H.3.2-1

Table 6.1.2.3.4.3-2: SIB2

Derivation Path: TS 38.508-1 [14] Table 4.6.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16 SEQUENCE {			
s-SearchDeltaP-r16	dB3		
t-SearchDeltaP-r16	s5		
}			
cellEdgeEvaluation-r16	Not present		
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 6.1.2.3.4.3-3: SystemInformationBlockType3

Derivation Path: TS 36.508 [25] Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
relaxedMeasurement-r16 SEQUENCE {			
threshServingLow	22	Actual value = 44 dB	
cellReselectionPriority	4		lower priority E-UTRA
}			
}			

Table 6.1.2.3.4.3-4: SystemInformationBlockType24

Derivation Path: TS 36.508 [25] Table 4.4.3.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
cellReselectionPriority-r15[*n*]	5		lower priority E-UTRA
threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
}			
}			

6.1.2.3.5 Test requirement

Tables 6.1.2.3.4.1-3, 6.1.2.3.5-1 and 6.1.2.3.5-2 define the primary level settings including test tolerances for lower priority E-UTRA cell re-selection test case.

Table 6.1.2.3.5-1: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC pattern 2	
		2, 5	SMTC pattern 1	
		3, 6	SMTC pattern 1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-100	-98
		2, 5	-100	-98
		3, 6	-97	-95
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-100	-98
SS-RSRP	dBm/SCS	1, 4	-103.6	-84.4
		2, 5	-103.6	-84.4
		3, 6	-100.6	-81.4
$\hat{E}_s / I_{ot}$	dB	1, 4	-3.6	13.6
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4	-3.6	13.6
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4	-70.48	-56.26
	dBm/9.36 MHz	2, 5	-70.48	-56.26
	dBm/38.16 MHz	3, 6	-64.37	-50.16
Treselection	S	1, 2, 3, 4, 5, 6	0	
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	50	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6	44	
$Thresh_{x, low P (Note 2)}$	dB	1, 2, 3, 4, 5, 6	50	
$S_{SearchDeltaP}$	dB	1, 2, 3, 4, 5, 6	3	
$T_{SearchDeltaP}$	s	1, 2, 3, 4, 5, 6	5	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, Low}$ which is included in NR system information, and is a threshold for the E-UTRA target cell

Table 6.1.2.3.5-2: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2 T3
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	

OCNG Patterns defined in TS 36.133 clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-82.4	-84
$\hat{E}_s / I_{ot}$	dB	15.6	14
$\hat{E}_s / N_{oc}$	dB	15.6	14
$Treselection_{EUTRAN}$	S	0	
SnonintrasearchP	dB	Not sent	
$Thresh_{x, highP}$ (Note 2)	dB	48	
$Thresh_{serving, lowP}$	dB	44	
$Thresh_{x, lowP}$	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell			

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling low mobility criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 17 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN} + T_{SI-E-UTRA}$,

Where:

$T_{evaluate, E-UTRAN}$ See Table 4.2.2.11.2-1 in clause 4.2.2.11.2 of TS 38.133 [6]

$T_{SI-E-UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to a lower priority E-UTRAN cell for UE fulfilling low mobility criterion.

6.1.2.4 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRAN for UE fulfilling not-at-cell edge relaxed measurement criterion

6.1.2.4.1 Test purpose

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection when UE fulfils the not-at-cell edge criterion specified in clause 4.2.2.11.3 of TS 38.133 [6] and the E-UTRAN cell is of lower priority.

6.1.2.4.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards supporting relaxed RRM measurement.

6.1.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.2.4.

6.1.2.4.4 Test description

6.1.2.4.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 6.1.2.4.4.1-1.

Table 6.1.2.4.4.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
6.1.2.4-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode
6.1.2.4-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode
6.1.2.4-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, TDD duplex mode
6.1.2.4-4	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode
6.1.2.4-5	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode
6.1.2.4-6	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	LTE 10MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test requirement and the DUT according to the parameters in Table 6.1.2.4.4.1-2.

Table 6.1.2.4.4.1-2: Initial conditions for NR SA FR1 – E-URTA cell re-selection to lower priority E-UTRA for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 6.1.2.4.4.1-3.

2. Message contents are defined in clause 6.1.2.4.4.3.

3. The test scenario comprises of one NR cell and one E-UTRAN cell. Cell 1 is the NR PCell and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 6.1.2.4.4.1-3: General test parameters for NR to lower priority E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase and fulfil the not at the cell edge

	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	criteria.
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	0.64	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211
			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6	24	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6	24	T2 needs to be defined so that cell re-selection reaction time is taken into account.

6.1.2.4.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an E-UTRA neighbour cell (Cell 2). The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

The UE is configured with the relaxed measurement criterion for UE with not-at-cell edge defined in clause 5.2.4.9.2 in TS 38.304 [30]. So, Cell 1 configures the UE as follows:

- *lowMobilityEvalutation* [2] criterion is not configured;
- *cellEdgeEvaluation* [2] criterion is configured according to the parameters listed in Table 6.1.2.4.5-1;
- *combineRelaxedMeasCondition* [2] is not configured

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 6.1.2.4.5-1 and 6.1.2.4.5-2. T1 starts.
3. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.
4. If the UE responds on Cell 2 during time duration T1 within 17 seconds from the beginning of time period T1 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
5. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11.

6 The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE.

7. The SS shall switch the power setting from T1 to T2 as specified in Table 6.1.2.4.5-1 and 6.1.2.4.5-2. T2 starts.
8. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 1.
9. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 10. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.

10 The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE, and then skip to step 12.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR according to TS 38.508-1 [14] clause 4.5.

12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.1.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.1.2.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.3-1 Table H.2.3-2 with Condition SMTC 1 and lower priority for configuration 6.1.2.4-2, 6.1.2.4-3, 6.1.2.4-5 and 6.1.2.4-6 Table H.2.3-2 with Condition SMTC 2 and lower priority for configuration 6.1.2.4-1 and 6.1.2.4-4 Table H.2.3-3 with Condition lower priority
Default RRC messages and information elements contents exceptions	Table H.3.2-1

Table 6.1.2.4.4.3-2: SIB2

Derivation Path: TS 38.508-1 [14] Table 4.6.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16	Not present		
cellEdgeEvaluation-r16 SEQUENCE {			
s-SearchTHresholdP-r16	16	Actual value is 16*2 = 32dB	
}			
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 6.1.2.4.4.3-3: SystemInformationBlockType3

Derivation Path: TS 36.508 [25] Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
threshServingLow	22	Actual value = 44 dB	
cellReselectionPriority	4		lower priority E-UTRA
}			
}			

Table 6.1.2.4.4.3-4: SystemInformationBlockType24

Derivation Path: TS 36.508 [25] Table 4.4.3.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
cellReselectionPriority-r15[*n*]	5		lower priority E-UTRA

threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
}			
}			

6.1.2.4.5 Test requirement

Tables 6.1.2.4.4.1-3, 6.1.2.4.5-1 and 6.1.2.4.5-2 define the primary level settings including test tolerances for lower priority E-UTRA cell re-selection test case.

Table 6.1.2.4.5-1: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC pattern 2	
		2, 5	SMTC pattern 1	
		3, 6	SMTC pattern 1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-100	-98
		2, 5	-100	-98
		3, 6	-97	-95
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-100	-98
SS-RSRP	dBm/SCS	1, 4	-103.6	-84.4
		2, 5	-103.6	-84.4
		3, 6	-100.6	-81.4
$\hat{E}_s / I_{ot}$	dB	1, 4	-3.6	13.6
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4	-3.6	13.6
		2, 5		
		3, 6		
$S_{SearchThresholdP}$	dB	1, 2, 3, 4, 5, 6	32	32
Io	dBm/9.36 MHz	1, 4	-70.48	-56.26
	dBm/9.36 MHz	2, 5	-70.48	-56.26
	dBm/38.16 MHz	3, 6	-64.38	-50.17
Treselection	S	1, 2, 3, 4, 5, 6	0	
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	60	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6	44	
$Thresh_{x, low P (Note 2)}$	dB	1, 2, 3, 4, 5, 6	50	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, Low}$ which is included in NR system information, and is a threshold for the E-UTRA target cell				

Table 6.1.2.4.5-2: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2 T3
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-82.4	-84
$\hat{E}_s / I_{ot}$	dB	15.6	14
$\hat{E}_s / N_{oc}$	dB	15.6	14
$Treselection_{EUTRAN}$	S	0	
SnonintrasearchP	dB	Not sent	
$Thresh_{x, highP}$ (Note 2)	dB	48	
$Thresh_{serving, lowP}$	dB	44	
$Thresh_{x, lowP}$	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell			

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 17 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN} + T_{SI-E-UTRA}$,

Where:

$T_{evaluate, E-UTRAN}$ See Table 4.2.2.11.3-1 in clause 4.2.2.11.3 of TS 38.133 [6]

$T_{SI\text{-}E\text{-}UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to a lower priority E-UTRAN cell for UE fulfilling not-at-cell edge criterion.

6.1.2.5 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA for UE configured with highSpeedMeasFlag-r16

6.1.2.5.1 Test purpose

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in TS 38.133 [6] clause 4.2.2.5 when the E-UTRAN cell is of lower priority.

6.1.2.5.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards and supporting measurement enhancements in high speed scenario.

6.1.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.1.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.1.2.5.

6.1.2.5.4 Test description

6.1.2.5.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 6.1.2.5.4.1-1.

Table 6.1.2.5.4.1-1: Supported test configurations for NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA for UE configured with highSpeedMeasFlag-r16

Configuration	Description of serving cell	Description of target cell
6.1.2.5-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
6.1.2.5-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
6.1.2.5-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
6.1.2.5-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6.1.2.5-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6.1.2.5-6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test requirement and the DUT according to the parameters in Table 6.1.2.5.4.1-2.

Table 6.1.2.5.4.1-2: Initial conditions for NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA for UE configured with highSpeedMeasFlag-r16

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 6.1.2.5.4.1-3.

2. Message contents are defined in clause 6.1.2.5.4.3.

3. The test scenario comprises of one NR cell and one E-UTRAN cell. Cell 1 is the NR PCell and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 6.1.2.5.4.1-3: General test parameters for NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA for UE configured with highSpeedMeasFlag-r16

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase.
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		ms	1, 2, 3, 4, 5, 6	320	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

6.1.2.5.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an E-UTRA low priority neighbour cell (Cell 2) on different frequencies. The test consists of 2 successive time periods, with time duration of T1, and T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. The E-UTRAN Cell 2 is indicated by NR Cell 1 as an HST cell.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* or *RRCConnectionRequest* message to perform a Registration procedure for mobility on NR Cell or E-UTRA Cell respectively.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Set Cell 2 physical cell identity = initial cell 2 physical cell identity. *highSpeedMeasFlag-r16* is provided by *SIB1* of Cell 1.

2. Set the parameters according to T2 in Table 6.1.2.5.5-1 and 6.1.2.5.5-2. Then wait 5s to ensure that Cell 2 has been detected by the UE.

3. Set the parameters according to T1 in Table 6.1.2.5.5-1 and 6.1.2.5.5-2. T1 starts.

4. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 2.

5. If the UE responds on Cell 2 within 3 seconds from the beginning of time period T1, then count a success for the event “Re-select Cell 2”. Otherwise count a failure for the event “Re-select Cell 2”.

6. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 7. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 13.

7. The SS shall send an *RRCConnectionRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.
8. The SS shall switch the power setting from T1 to T2 as specified in Table 6.1.2.5.5-1 and 6.1.2.5.5-2. T2 starts.
9. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.
10. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 11. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 12.
11. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1. skip to 13
12. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 in Cell 1.
13. Set the parameters according to T2 in Table 6.1.2.5.5-1 and 6.1.2.5.5-2. Then wait 5s to ensure that Cell 2 has been detected by the UE.
14. Repeat step 3-13 until a test verdict for the event “Re-select Cell 2” has been achieved, resulting in an event verdict: pass or fail. The event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. The test passes if the event pass, otherwise the test fails.

6.1.2.5.4.3 Message contents

Same as message contents in 6.1.2.2.4.3 except that

- Table H.2.3-1 in common contents of SIB exceptions is replaced by Table 6.1.2.5.4.3-1.
- Table H.2.3-3 in common contents of SIB exceptions is replaced by Table 6.1.2.5.4.3-3.
- In addition to the message contents mentioned above, exceptions given in Table 6.1.2.5.4.3-4 and Table 6.1.2.5.4.3-5 also apply.

Table 6.1.2.5.4.3-1: SIB1 (Cell 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
servingCellConfigCommon	ServingCellConfigCommonSIB	Table 6.1.2.5.4.3-2	
}			

Table 6.1.2.5.4.3-2: ServingCellConfigCommonSIB (Table 6.1.2.5.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28 with condition HST			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommonSIB ::= SEQUENCE {			
highSpeedConfig-r16 SEQUENCE {			
highSpeedMeasFlag-r16	true		
}			
}			

Table 6.1.2.5.4.3-3: SIB5 (Cell 1)

Derivation Path: Table H.2.3-3 with Condition lower priority			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB5 ::= SEQUENCE {			
carrierFreqListEUTRA-v1610 SEQUENCE (SIZE (1..maxEUTRA-Carrier)) OF CarrierFreqEUTRA-v1610 {	1 entry	carrierFreqListEUTRA-v1610 and carrierFreqListEUTRA contain same number of entries. And the entries are listed in the same order	
CarrierFreqEUTRA-v1610[1] SEQUENCE {		entry 1	
highSpeedEUTRACarrier-r16	true		
}			

}			
}			

Table 6.1.2.5.4.3-4: SystemInformationBlockType2 (Cell2)

Derivation Path: TS 36.508 [25] Table 4.4.3.3-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType2 ::= SEQUENCE {			
radioResourceConfigCommon SEQUENCE {			
highSpeedInterRAT-NR-r16	true		
}			
}			

Table 6.1.2.5.4.3-5: SystemInformationBlockType24 (Cell2)

Derivation Path: TS 36.508 [25], Table 4.4.3.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-v1610 SEQUENCE (SIZE (1..maxFreq)) OF CarrierFreqNR-v1610 {	1 entry		
CarrierFreqNR-v1610[1] SEQUENCE {		entry 1	
highSpeedCarrierNR-r16	true		
}			
}			
}			

6.1.2.5.5 Test requirement

Tables 6.1.2.5.4.1-3, 6.1.2.5.5-1 and 6.1.2.5.5-2 define the primary level settings including test tolerances for NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA for UE configured with highSpeedMeasFlag-r16 test case.

Table 6.1.2.5.5-1: NR cell specific test parameters for NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC pattern 2	
		2, 5	SMTC pattern 1	
		3, 6	SMTC pattern 1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A. 2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-100	-98
		2, 5	-100	-98
		3, 6	-97	-95
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-100	-98
SS-RSRP	dBm/SCS	1, 4	-103.60	-84.40
		2, 5	-103.60	-84.40
		3, 6	-100.60	-81.40
$\hat{E}_s / I_{ot}$	dB	1, 4	-3.6	13.6
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4	-3.6	13.6
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4	-70.46	-56.26
	dBm/9.36 MHz	2, 5	-70.46	-56.26
	dBm/38.16 MHz	3, 6	-64.38	-50.16
Treselection	S	1, 2, 3, 4, 5, 6	0	
Snonintrasearch	dB	1, 2, 3, 4, 5, 6	50	
$Thresh_{x, high}$ (Note 2)	dB	1, 2, 3, 4, 5, 6	48	
$Thresh_{serving, low}$	dB	1, 2, 3, 4, 5, 6	44	
$Thresh_{x, low}$	dB	1, 2, 3, 4, 5, 6	50	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell.				
Note 3: Void.				

Table 6.1.2.5.5-2: E-UTRA cell specific test parameters for NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		

PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-82.40	-84
$\hat{E}_s / I_{ot}$	dB	15.60	14
$\hat{E}_s / N_{oc}$	dB	15.60	14
$Treselection_{EUTRAN}$	S	0	
Snonintrasearch	dB	Not sent	
$Thresh_{x, high}$ (Note 2)	dB	48	
$Thresh_{serving, low}$	dB	44	
$Thresh_{x, low}$	dB	50	
Propagation Condition		AWGN 1944Hz Note3	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell

Note 3: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.

The cell reselection delay to a lower priority E-UTRAN cell for UE configured with *highSpeedMeasFlag-r16* is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN_HST} + T_{SI-E-UTRA}$,

Where:

$T_{evaluate, E-UTRAN_HST}$ = 0.96s, as defined in TS 38.133 [6] Table 4.2.2.5-2.

$T_{SI-E-UTRA}$ = 1.28s, is the maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

This gives a total of 2.24 s, allow 3 s for the cell re-selection delay to a lower priority E-UTRAN cell for UE configured with *highSpeedMeasFlag-r16*.

6.2 RRC_INACTIVE state mobility

6.2.0 General

The requirements in this clause are applicable when the UE is configured with timing alignment (TA) validation using *cg-SDT-RSRP-ChangeThreshold* for transmitting in uplink using CG-SDT as specified in TS 38.331 [13].

The requirements in this clause are applicable for the UE performing small data tranmissions using configured resources as per TS 38.331 [13].

The UE is allowed to transmit using the configured uplink resources provided that the UE is synchronized towards (i.e. using the timing derived using the latest available N_{TA} value as specified in 38.133 [6] clause 7.1.2) the serving cell

prior to transmission. If the UE is not able to obtain the synchronization towards the serving cell then the UE shall drop the small data transmission. The UE determines the small data transmission occasion according to the received CG-SDT configuration TS 38.331 [13].

The normative reference for this requirement is TS 38.133 [6] clauses 5.5.1 and 5.5.2.

6.2.0.1 Minimum conformance requirements for TA validation using CG-SDT

When *cg-SDT-RSRP-ChangeThreshold* is configured for TA validation based on the RSRP change criterion according to clause 5.8.2 in TS 38.321 [12], the UE is allowed to transmit using CG-SDT using the timing derived using the latest available N_{TA} value as specified in TS 38.133 [6] clause 7.1 provided that

- the first RSRP ($RSRP_1$) measurement and the second RSRP ($RSRP_2$) measurements used in the TA validation are valid measurements and,
- timing alignment validation for transmission using CG-SDT is valid according to the validation criteria in clause 5.8.2 in TS 38.321 [12].

$RSRP_1$ and $RSRP_2$ are considered valid provided that the conditions in Table 6.2.0.1-1 are met for FR1.

Table 6.2.0.1-1: Valid measurement for FR1

Measurement	FR1
$RSRP_1$	$(T1 - \min(640ms, M1*T_{DRX})) \leq T1' \leq (T1 + \min(640ms, M1*T_{DRX}))$
$RSRP_2$	$(T2 - \min(640ms, M1*T_{DRX})) \leq T2' \leq T2$

If at least one of $RSRP_1$ and $RSRP_2$ is considered to be invalid based on the above conditions, then the UE shall not validate the CG-SDT using $RSRP_1$ and $RSRP_2$ and shall not transmit using CG-SDT. Additionally, the UE shall not transmit in an CG-SDT occasion that occurs more than 640 ms after T2.

Where:

- T1 is the time when
  - *RRCRelease* with CG-SDT configuration (TS 38.331 [13]) is received
  - the latest TA is received if TA is received while in RRC_INACTIVE state.
- T1' is the time when the UE has completed $RSRP_1$.
- T2 is the time when the UE performs TA validation as defined in clause 5.27.2 in (TS 38.321 [12]) for transmission using CG-SDT.
- T2' is the time when the UE has completed $RSRP_2$.
- T_{DRX} is the DRX cycle length in ms.
- M1 the scaling factor as defined in TS 38.133 [6] clause 4.2.2.2.

The normative reference for this requirement is TS 38.133 [6] clause 5.5.3.

6.2.1 NR SA FR1 TA Validation for CG-SDT

6.2.1.1 Test Purpose

The purpose of this test is to partly verify that the UE properly perform TA validation for CG-SDT transmission in 38.133 [6] clause 5.5.3.

6.2.1.2 Test Applicability

This test applies to all types of NR UE release 17 and forward, supporting NR SA, CG-SDT and long DRX cycle.

6.2.1.3 Minimum Conformance Requirement

The minimum requirements are specified in clause 6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.2.1.

6.2.1.4 Test Description

The test includes two sub-tests, Sub-test#1 for testing valid TA where UE can initiate CG-SDT transmission, and Sub-test#2 for testing invalid TA where UE does not initiate CG-SDT transmission. Subtest#2 is only tested if Sub-test#1 has passed. For each sub-test, UE is configured with CG-SDT configuration when entering RRC_INACTIVE state. Sub-test#1 consists of four successive time periods, with time duration of T1, T2, T3 and T4, respectively. Sub-test#2 consists of two successive time periods, with time duration of T5 and T6, respectively. There is one cell, which is the active NR cell in FR1. Figure 6.2.1.4-1 shows the variation of the RSRP over the duration of Sub-test#1, and Figure 6.2.1.4-2 shows the variation of the RSRP over the duration of Sub-test#2.

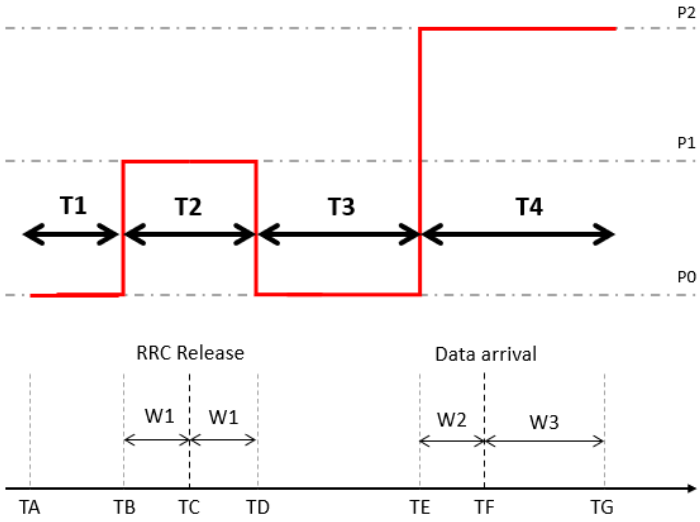

Figure 6.2.1.4-1: RSRP variation model for Sub-test#1 for NR SA FR1 TA Validation for CG-SDT

In Sub-test#1:

Prior to the time point TA, the UE shall be fully synchronized to PCell (Cell 1), be registered to the cell and have entered RRC_CONNECTED state.

Before starting the test at time point TA, test equipment configures RSRP to P0.

At time point TB, RSRP is changed from P0 to P1.

At time point TC, which is W1 after time point TB, UE expect to receive RRC release with CG SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P1 to P0.

At time point TE, RSRP is changed from P0 to P2.

Test equipment triggers UL data arrival at UE lower layer at time point TF. After time point TF, test equipment observes whether UE transmits with CG-SDT no later than TG, which is W3 after TF.

After time point TG, RRC status is changed from RRC INACTIVE to RRC CONNECTED.

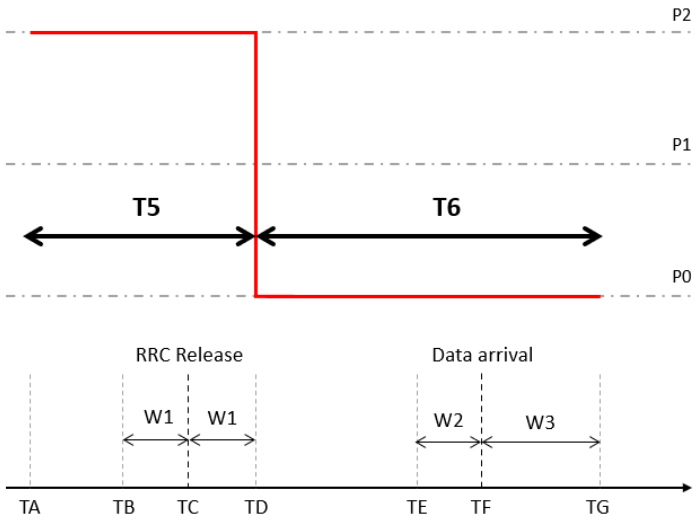

Figure 6.2.1.4-2: RSRP variation model for Sub-test#2 for NR SA FR1 TA Validation for CG-SDT

In Sub-test#2:

Prior to the time point TA, the UE shall pass Sub-test#1 and have entered RRC connected mode. Otherwise, Sub-test#2 shall not be executed.

From time point TA to time point TD, RSRP is set to P2.

At time point TC, which is W1 after time point TB, UE expect to receive RRC release with CG SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P2 to P0.

Test equipment triggers UL data arrival at UE lower layer at time point TF. TF is 3360ms after TD. After time point TF, test equipment observes whether UE transmits with CG-SDT no later than TG which is W3 after TF.

W1 equals to 640ms and W2 equals to 640ms, based on requirements in clause 6.2.0. W3 is 860ms.

6.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.2.1.4.1-1.

Table 6.2.1.4.1-1: NR configuration for NR SA FR1 TA Validation for CG-SDT

Config	Description
6.2.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.2.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.2.1-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.2.1.4.1-2.

Table 6.2.1.4.1-2: Initial conditions for NR SA FR1 TA Validation for CG-SDT

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.6.1 without fading	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 6.2.1.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.2.1.4.1-3. Supplementary timeline events are given in Table 6.2.1.4.1-4.

Table 6.2.1.4.1-3: General test parameters for NR SA FR1 TA Validation for CG-SDT

Parameter	Unit	Test configuration	Value	Comment
TDD Configuration		1	N/A	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
$BW_{channel}$	MHz	1,2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
PDSCH Reference measurement channel		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET Reference Channel		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
SSB configuration		1,2	SSB.1 FR1	
		3	SSB.2 FR1	
OCNG Patterns		1,2,3	OP.1	
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
SMTC configuration		1,2,3	SMTC.1	
DRX configuration	Ms	1,2,3	640	
T1	s	1,2,3	0.4	
T2	s	1,2,3	1.28	
T3	s	1,2,3	2.72	
T4	s	1,2,3	1.5	
T5	s	1,2,3	1.68	
T6	s	1,2,3	4.22	
cg-SDT-RSRP-ChangeThreshold	dB	1,2,3	8	
cg-SDT-RSRP-ThresholdSSB	dBm	1,2,3	-110	
cg-SDT-TimeAlignmentTime		1,2,3	infinity	
CG-SDT resource period	ms		320	configuredGrantConfig Peridocity at 38.331 [13] Config 1,2 : sym320x14, config 3 : sym640x14
Propagation condition		1,2,3	AWGN	

Table 6.2.1.4.1-4: Supplementary timeline event derivations for NR SA FR1 TA Validation for CG-SDT

Time Period	Unit	Test configuration	Value	Derivation
T_delay_modeB	ms	1,2,3	4000	Test configuration for step 4 and step 9
W1	ms	1,2,3	640	Test configuration
W2	ms	1,2,3	640	Test configuration
W3	ms	1,2,3	860	Test configuration
TAtoTB	ms	1,2,3	400	Sub-test#1: TAtoTB = T1 Sub-test#2: TAtoTB = T5 – 2*W1
TBtoTC	ms	1,2,3	640	TBtoTC = W1
TCtoTD	ms	1,2,3	640	TCtoTD = W1
TDtoTE	ms	1,2,3	2720	Sub-test#1: TDtoTE = T3 Sub-test#2: TDtoTE = T6 – W2 – W3
TEtoTF	ms	1,2,3	640	TEtoTF = W2
TFtoTG	ms	1,2,3	860	TFtoTG = W3

Note 1:	These timeline derivations are useful to understand different timeline events other than T1, T2, T3, T4, T5 and T6. Calculations are informative.

6.2.1.4.2 Test Procedure

The test parameters for the PCell are given in Table 6.2.1.4.1-1, Table 6.2.1.4.1-3, and Table 6.2.1.5-1, for Sub-test#1 and Sub-test#2, respectively. Prior to the start of each of the Sub-tests, the UE shall be fully synchronized to PCell (Cell 1). According to Table 6.2.1.5-1, in time intervals T1 to T6 the SS configures the SS-RSRP by fixing N_{oc} and adjusting SNR correspondingly.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On, Test Loop Function On and Activate UE Test Loop Mode B according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters of NR Cell according to T1 in Table 6.2.1.5-1. Propagation conditions are set according to clause C.2.3. Sub-test#1 starts. T1 starts.

3. When T1 expires the SS shall change the SS-RSRP value to T2 as specified in Table 6.2.1.5-1. T2 starts.

4. W1=640ms seconds after the start of T2 (time event TC), the SS shall send CLOSE UE TEST LOOP message for UE Test Loop Mode B and configuring T_delay_modeB as per Table 6.2.1.4.3-5, and transmit one PDCP SDU (which will get buffered at the UE) immediately followed by an *RRCRelease* message containing CG-SDT configuration for the UE to change its RRC state to RRC_INACTIVE, according to section 6.2.1.4.3.

5. When T2 expires the SS shall change the SS-RSRP value to T3 as specified in Table 6.2.1.5-1. T3 starts.

6. When T3 expires the SS shall change the SS-RSRP value to T4 as specified in Table 6.2.1.5-1. T4 starts.

7. T_delay_modeB expires after the start of T4, at time event TF. If the UE transmits PUSCH at the next CG-SDT resource no later than TG, which is W3 seconds after TF, then the number of successful tests for CG-SDT Sub-test#1 is increased by one. Otherwise, the number of failed tests for CG-SDT Sub-test#1 is increased by one and proceed with step 12.

8. The SS shall transmit *RRCRelease*. Set the parameters of NR Cell according to T5 in Table 6.2.1.5-1. Propagation conditions are set according to clause C.2.3. Afterwards, the SS shall ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On, Test Loop Function On and Activate UE Test Loop Mode B according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. Sub-test#2 starts. T5 starts.

9. W1=640ms seconds before the end of T5 (time event TC), the SS shall send CLOSE UE TEST LOOP message for UE Test Loop Mode B and configuring T_delay_modeB as per Table 6.2.1.4.3-5, and transmit one PDCP SDU (which will get buffered at the UE) immediately followed by an *RRCRelease* message containing CG-SDT configuration for the UE to change its RRC state to RRC_INACTIVE, according to section 6.2.1.4.3.

10. When T5 expires the SS shall change the SS-RSRP value to T6 as specified in Table 6.2.1.5-1. T6 starts.

11. T_delay_modeB expires after the start of T6, at time event TF. If the UE transmits PUSCH at the next CG-SDT resource no later than TG, which is W3 seconds after TF, then the number of failed tests for CG-SDT Sub-test#2 is increased by one. Otherwise, the number of successful tests for CG-SDT Sub-test#2 is increased by one. Proceed with step 12.

12. The SS shall switch off and then on the UE and then proceed with step 13.

13. Repeat steps 1-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved for both Sub-tests. If Sub-test#1 fails, there is no need to achieve any confidence level for Sub-test#2.

6.2.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 6.2.1.4.3-1: Common Exception messages for NR SA FR1 TA Validation for CG-SDT

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	38.508-1 [14] Table 4.6.1-16 with conditions NR_RRC_INACTIVE and SDT

Table 6.2.1.4.3-2: *SDT-MAC-PHY-CG-Config-r17* for NR SA FR1 TA Validation for CG-SDT

Derivation Path: TS 38.508-1 [6], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**
SDT-MAC-PHY-CG-Config-r17::= SEQUENCE {			
cg-SDT-ConfigLCH-RestrictionToAddModList-r17 SEQUENCE (SIZE(1..maxLC-ID)) OF CG-SDT-Config-LCH-restriction-r17 {	1 entry		
logicalChannelIdentity-r17	LogicalChannelIdentity with condition DRB1		
configuredGrantType1Allowed-r17	true		
allowedCG-List-r17	Not present		
}			
cg-SDT-ConfigInitialBWP-NUL-r17 CHOICE {			
setup	BWP-UplinkDedicatedSDT-r17		
}			
cg-SDT-ConfigInitialBWP-SUL-r17	Not present		
cg-SDT-ConfigInitialBWP-DL-r17			
setup	BWP-DownlinkDedicatedSDT-r17		
}			
cg-SDT-TimeAlignmentTimer-r17	infinity		
cg-SDT-RSRP-ThresholdSSB-r17	46	-110dBm	
cg-SDT-TA-ValiditationConfig-r17 CHOICE {			
setup SEQUENCE {			
cg-SDT-RSRP-ChangeThreshold-r17	dB8		
}			
}			
}			

Table 6.2.1.4.3-3: *BWP-UplinkDedicatedSDT-r17* for NR SA FR1 TA Validation for CG-SDT

Derivation Path: TS 38.331 [6], clause 6.2.2			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-UplinkDedicatedSDT-r17::= SEQUENCE {			
pusch-Config-r17 CHOICE {			
setup	PUSCH-Config		
}			
configuredGrantConfigToAddModList-r17 SEQUENCE (SIZE (1..maxNrofConfiguredGrantConfig-r16)) OF ConfiguredGrantConfig	1 entry		
}			

Table 6.2.1.4.3-4: *ConfiguredGrantConfig* for NR SA FR1 TA Validation for CG-SDT

Derivation Path: TS 38.331 [6], clause 6.2.2			
Information Element	**Value/remark**	**Comment**	**Condition**
ConfiguredGrantConfig ::= SEQUENCE {			
periodicity	sym320x14		Config 1,2
	sym640x14		Config 3
}			

Table 6.2.1.4.3-5: CLOSE UE TEST LOOP for NR SA FR1 TA Validation for CG-SDT

Derivation Path: TS 38.509 [16], clause 6.3.1 and 38.508-1 [4] Table 4.7A.2		
Information Element	**Value/remark**	**Comment**
Protocol discriminator	1 1 1 1	
Skip indicator	0 0 0 0	
Message type	1 0 0 0 0 0 0 0	
UE test loop mode	0 0 0 0 0 0 0 1	UE test loop mode B

UE test loop mode B LB setup		
IP PDU delay	0 0 0 0 0 1 0 0	T_delay_modeB duration in seconds (4 seconds)

6.2.1.5 Test Requirement

Table 6.2.1.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 TA Validation for CG-SDT.

Table 6.2.1.5-1: Cell-specific test parameters for NR SA FR1 TA Validation for CG-SDT

Parameter	Config	Unit	SSB#0					
			T1	T2	T3	T4	T5	T6
N_{oc}	1,2	dBm/15kHz	-100	-100	-100	-100	-100	-100
	3	dBm/15kHz	-100	-100	-100	-100	-100	-100
N_{oc}	1,2	dBm/SSB SCS	-100	-100	-100	-100	-100	-100
	3	dBm/SSB SCS	-97	-97	-97	-97	-97	-97
$\hat{E}_s / I_{ot}$	1,2	dB	0	12	0	14	14	0.25
	3	dB	0	12	0	14	14	0
SS RSRP	1,2	dBm/SSB SCS	-100	-88	-100	-86	-86	-99.75
	3	dBm/SSB SCS	-97	-85	-97	-83	-83	-97
Io	1,2	dBm/9.36MHz	-69.04	-59.78	-69.04	-57.88	-57.88	-68.91
	3	dBm/38.16MHz	-62.93	-53.68	-62.93	-51.78	-51.78	-62.93
$\hat{E}_s / N_{oc}$	1,2	dB	0	12	0	14	14	0.25
	3	dB	0	12	0	14	14	0

The UE behaviour in each test during time durations shall be as follows:

During Sub-test#1, UE shall transmit PUSCH at CG-SDT resource within 860ms after time point TF.

During Sub-test#2, after passing Sub-test#1, UE shall not transmit PUSCH at CG-SDT resources after TF until the end of the test at time point TG.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.3 RRC_CONNECTED state mobility

6.3.1 Handover

6.3.1.0 Minimum conformance requirements

6.3.1.0.1 Minimum conformance requirements for NR – E-UTRAN handover

When the UE receives a RRC message implying handover to E-UTRAN the UE shall be ready to start the transmission of the uplink PRACH channel in E-UTRA within $D_{handover}$ seconds from the end of the last TTI containing the RRC command. $D_{handover}$ is defined as

$$D_{handover} = T_{RRC_procedure_delay} + T_{interruption}$$

Where:

$T_{RRC_procedure_delay}$: it is the RRC procedure delay, which is 50ms

$T_{interruption}$: it is the time between end of the last TTI containing the RRC command on the NR PDSCH and the time the UE starts transmission of the PRACH in E-UTRAN, excluding $T_{RRC_procedure_delay}$.

When the inter-RAT handover to E-UTRAN is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + 20 \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is unknown and signal quality is sufficient for successful cell detection on the first attempt, then T_{search} = 80 ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to 30 ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is know if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in TS 36.133 [6] clause [9.4.1].

The normative reference for this requirement is TS 38.133 [6] clause 6.1.2.1.

6.3.1.0.2 Minimum conformance requirements for NR FR1 – NR FR1 handover

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

Where:

$D_{handover}$ equals the maximum RRC procedure delay to be defined in clause12 in TS 38.331 [13] plus the interruption time stated in clause 6.1.1.2.2.

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + 20 + T_{\Delta} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot≥[-2] dB, then T_{search} = [3] *T_{rs} ms if the target cell SSB BW is 12PRBs, otherwise T_{search} = T_{rs} ms.If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = [5] *T_{rs} ms if the target cell SSB BW is 12PRBs, otherwise T_{search} = 3* T_{rs} ms.

Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = T_{rs}.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this section is applied with Trs=[5]ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause [9.2.5] for intra-frequency handover and Clause [9.3.1] for inter-frequency handover.

The normative reference for this requirement is TS 38.133 [6] clause 6.1.1.2.

6.3.1.0.3 Minimum conformance requirements for NR – UTRAN handover

When the UE receives a RRC message implying handover to UTRAN the UE shall be ready to start the transmission of the new UTRA uplink DPCCH within Dhandover msfrom the end of the last NR TTI containing the RRC MobilityfromNRCommand command.

where:

- Dhandover equals the RRC procedure delay, which is 50 ms plus the interruption time stated in TS 38.133 [6] clause 6.1.2.2.3.

The interruption time is the time between the end of the last TTI containing the RRC command on the NR PDSCH and the time the UE starts transmission on the uplink DPCCH in UTRAN, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not.

The target cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. The UE shall always perform a UTRA synchronisation procedure as part of the handover procedure.

If the target cell is known the interruption time shall be less than Tinterrupt1

$$Tinterrupt1 = TIU+Tsync+50+ 10*Fmax + TMC \text{ ms}$$

If the target cell is unknown the interruption time shall be less than Tinterrupt2

$$Tinterrupt2 = TIU+Tsync+150 + 10*Fmax + TMC \text{ ms}$$

This requirement shall be met, provided that there is one target cell in the MobilityfromNRCommand command. Performance requirements for E-UTRA to UTRA soft handover are not specified. When UE is connected to an NR cell, UTRA SFN timing measurements are not reported. This implies that the timing of the DPCH of the UTRA target cells in the active set cannot be configured by UTRAN to guarantee that all target cells fall within the UE reception window of T0 +/- 148 chips.

Where:

- TIU is the interruption uncertainty when changing the timing from the NR to the new UTRAN cell. TIU can be up to one UTRA frame (10 ms).
- Fmax denotes the maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH on the UTRA target cell. If HS-PDSCH is configured in the UTRA target cell, Fmax is 4 radio frames.
- Tsync is the time required for measuring the downlink DPCCH channel as stated in TS 25.214, clause 4.3.1.2. In case higher layers indicate the usage of a post-verification period Tsync=0 ms. Otherwise Tsync=40 ms.
- TMC is 0ms if a single UTRA cell is configured as the handover target, otherwise 20ms if handover to UTRA with 1, 2 or 3 UTRA carriers with secondary HS-PDSCH is configured.

The phase reference is the primary CPICH.

The requirements in this clause assume that N312 has the smallest possible value i.e. only one insync is required.

6.3.1.0.4 Minimum conformance requirements for NR FR1- NR FR1 DAPS handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR1 cell to NR FR1 cell. A DAPS handover is intra-frequency if the centre frequency of the SSB of the source cell and the centre frequency of the SSB of the target cell are the same, and the subcarrier spacing of the two SSBs are also the same.

Note 1: For intra-frequency DAPS handover, no requirement applies if active DL and UL BWP of target cell is not confined within the active DL and UL BWP of the source cell respectively.

Note 2: For inter-frequency DAPS handover, no requirement applies if the BWP of target cell is overlapped with the BWP of source cell in frequency domain.

An FR1 DAPS handover is synchronous if it meets the conditions in table 6.3.1.0.4-1, otherwise it is asynchronous

Table 6.3.1.0.4-1: Sync conditions for FR1 DAPS handover

Type of handover	Maximum receive timing difference between source and target cell (μs) for sync DAPS handover	Maximum transmit timing difference between source and target cell (μs) for sync DAPS handover
Intra-frequency Note 1,2,3	6μs	7.6 μs
Intra-band inter-frequency Note 1,2,3	6μs	7.6 μs
Inter-band inter-frequency	33 μs	34.6 μs
Note 1: For synchronous DAPS handover, if the receive time difference exceeds the cyclic prefix length of that SCS, demodulation performance degradation is expected for the first symbol of the slot. For asynchronous DAPS handover, if the receive time difference exceeds the cyclic prefix length of that SCS, interruptions may occur depending on UE implementation. The duration and frequency of occurrence of such interruptions is not specified. Note 2: For DAPS handover on a TDD band, a UE is not expected to transmit in the uplink earlier than N_{RX-TX} after the end of the last received downlink symbol in the same cell where N_{RX-TX}=25600Tc. Note 3: For DAPS handover on a TDD band, a UE is not expected to receive in the downlink earlier than N_{TX-RX} after the end of the last transmitted uplink symbol in the same cell where N_{TX-RX}=25600Tc.		

When the UE receives a RRC message implying DAPS handover to NR FR1 the UE shall be ready to start the transmission of the new uplink PRACH channel in NR within $D_{handover1}$ seconds from the end of the last TTI containing the RRC command when UE is configured with dual active protocol stack handover.

$$D_{handover1} = T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

$T_{RRC_procedure}$ is the maximum RRC procedure delay as specified in clause 12 in TS 38.331 [13].

T_{search}, T_{IU}, $T_{processing}$, T_{Δ} and T_{margin} are defined in TS 38.133 [6] clause 6.1.1.2.2.

After successful RACH procedure of the target cell, when the UE receives an RRC message implying source cell release command, the UE shall accomplish the release actions specified in TS 38.331 [13] within $D_{handover2}$.

$$D_{handover2} = T_{RRC_procedure} + T_{interrupt2}$$

Where:

$T_{RRC_procedure}$ is the RRC procedure delay as specified in clause 12 in TS 38.331 [2].

$T_{interrupt2}$ is defined in TS 38.133 [6] clause 6.3.1.0.4.

During $D_{handover1}$, the UE is allowed an interruption of up to $T_{interrupt1}$ on source cell.

For FR1-to-FR1 intra-frequency handover, $T_{interrupt1}$ is specified in Table 6.3.1.0.4-2.

Table 6.3.1.0.4-2: $T_{interrupt1}$ for FR1-to-FR1 intra-frequency DAPS HO

μ	NR Slot length (ms)	Interruption length $T_{interrupt1}$ (slots Note 1), synchronous DAPS HO	Interruption length $T_{interrupt1}$ (slots Note 1), asynchronous DAPS HO
0	1	1	2
1	0.5	2	3
2	0.25	4	5
Note 1: The same SCS of source cell and target cell is assumed. Note 2: It is assumed that the BWP of target cell is not larger than the BWP of source cell. It is assumed that the CBW of target cell is not larger than the CBW of source cell Note 3: Void			

For FR1-to-FR1 intra-band inter-frequency handover, $T_{interrupt1}$ is specified in Table 6.3.1.0.4-3.

Table 6.3.1.0.4-3: $T_{interrupt1}$ for FR1-to-FR1 intra-band inter-frequency DAPS HO

μ	NR Slot length (ms)	$T_{interrupt1}$ (slots[Note 1]), synchronous DAPS HO	$T_{interrupt1}$ (slots[Note 1]), asynchronous DAPS HO
0	1	1 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$	2+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
1	0.5	2 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$	3+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
2	0.25	4 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$	5+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
Note 1: The same SCS of source cell and target cell is assumed. Note 2: $T_{SMTC_duration}$ measured in subframes is the longest SMTC duration between source cell and target cell. Note 3: Void Note 4: $N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [6].			

For FR1-to-FR1 inter-band handover, $T_{interrupt1}$ is specified in Table 6.3.1.0.4-4.

Table 6.3.1.0.4-4: $T_{interrupt1}$ for FR1-to-FR1 inter-band DAPS HO

μ	NR Slot length (ms) of source cell	$T_{interrupt1}$ (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	5

For FR1-to-FR1 intra-frequency handover, $T_{interrupt2}$ is specified in Table 6.3.1.0.4-5 when the BWP of target cell is smaller than the BWP of source cell, and $T_{interrupt2}$ is specified in Table 6.3.1.0.4-6 when the same BWP is used for target cell and source cell.

Table 6.3.1.0.4-5: $T_{interrupt2}$ for FR1-to-FR1 intra-frequency DAPS HO

μ	NR Slot length (ms)	Interruption length X (slots[Note 1])	$T_{interrupt2}$ (slots[Note 1]) for asynchronous DAPS HO
0	1	2	3
1	0.5	4	5
2	0.25	8	9
Note 1: The same SCS of source cell and target cell is assumed. Note 2: It is assumed that the BWP of target cell is smaller than the BWP of source cell.			

Table 6.3.1.0.4-6: $T_{interrupt2}$ for FR1-to-FR1 intra-frequency DAPS HO

μ	NR Slot length (ms)	Interruption length X (slots[Note 1])	$T_{interrupt2}$ (slots[Note 1]) for asynchronous DAPS HO
0	1	1	2
1	0.5	2	3
2	0.25	4	5
Note 1: The same SCS of source cell and target cell is assumed. Note 2: It is assumed that the BWP of target cell is the same as the BWP of source cell. Note 3: Void			

For FR1-to-FR1 intra-band inter-frequency handover, $T_{interrupt2}$ is specified in Table 6.3.1.0.4-7.

Table 6.3.1.0.4-7: $T_{interrupt2}$ for FR1-to-FR1 intra-band inter-frequency DAPS HO

μ	NR Slot length (ms)	$T_{interrupt2}$ (slots[Note 1]) for synchronous DAPS HO	$T_{interrupt2}$ (slots[Note 1]) for asynchronous DAPS HO
0	1	1 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$	2+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
1	0.5	2 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$	3+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
2	0.25	4 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$	5+ $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
Note 1: The same SCS of source cell and target cell is assumed.			

Note 2:	$T_{SMTC_duration}$ measured in subframes is the longest SMTC duration between source cell and target cell.
Note 3:	Void.
Note 4:	$N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [6].

For FR1-to-FR1 inter-band handover, $T_{interrupt2}$ is specified in Table 6.3.1.0.4-8.

Table 6.3.1.0.4-8: $T_{interrupt2}$ for FR1-to-FR1 inter-band DAPS HO

μ	NR slot length (ms) of target cell	$T_{interrupt2}$ (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	5

The normative reference for this requirement is TS 38.133 [6] clause 6.1.1.2.

6.3.1.1 NR SA FR1 handover with known target cell

6.3.1.1.1 Test purpose

To verify the UE's ability to perform NR FR1-NR FR1 intra frequency handover in RRC_CONNECTED state by meeting the delay requirement and interruption length for handover to a known target cell.

6.3.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.3.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.1.

6.3.1.1.4 Test description

6.3.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.1.1.4.1-1.

Table 6.3.1.1.4.1-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.1.1.4.1-2

Table 6.3.1.1.4.1-2: Initial conditions for NR SA FR1 handover with known target cell

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.1.4.1-1	
Propagation conditions	AWGN	As specified in Annex C.2.2.

Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.1.1.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.3.1.1.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.1.1.4.1-3: General test parameters Intra-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	-1	Original Value 0dB, post TT Analysis, its -1 dB
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

6.3.1.1.4.2 Test procedure

The test scenario comprises of one NR carrier and two cells as given in tables 6.3.1.1.4.1-3 and 6.3.1.1.5-1. No gap patterns are configured in the test case. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send measurement report A3. An RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 6.3.1.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.
3. SS shall transmit an RRCReconfiguration message, configuring measurement object.
4. UE shall transmit RRCReconfigurationComplete message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.1.15-1.
6. UE shall transmit a MeasurementReport message triggered by Event A3.
7. SS shall transmit the RRCReconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 6.3.1.1.5-1. T3 starts.
8. If the UE transmits the uplink PRACH channel to Cell 2 less than 72 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
9. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.

10. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

11. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop.

12. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.3.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 1 and Synchronous cells for Config 1 and 2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC pattern 1 and Synchronous cells for Config 3 Table H.3.1-4 with A3-offset = -1dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.2-2 with Condition RBConfig_KeyChange

6.3.1.1.5 Test requirements

Table 6.3.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.1.1.5-1: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR2.1 TDD					
CORESET Reference Channel	Config 1		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR2.1 TDD					
TRS configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
	Config 1,2	kHz	15 kHz					

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
PUCCH/PUSCH subcarrier spacing	Config 3		30 kHz					
PRACH configuration			PRACH.1 FR1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98			-98		
N_{oc} Note2	Config 1,2	dBm/SCS	-98			-98		
	Config 3		-95			-95		
$\hat{E}_s/I_{ot}$	Config 1,2	dB	8	-2.41	-2.41	-Infinity	1.36	1.36
	Config 3	dB	8	-2.41	-2.41	-Infinity	1.36	1.36
$\hat{E}_s/N_{oc}$	Config 1,2	dB	8	8	8	-Infinity	10	10
	Config 3	dB	8	8	8	-Infinity	10	10
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-90	Infinity	-88	-88
	Config 3	dBm/SCS	-87	-87	-87	Infinity	-84.99	-84.99
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-57.67	-57.67	-61.41	-57.67	-57.67
	Config 3	dBm/ 38.16MHz	-55.31	-51.56	-51.56	-55.31	-51.56	-51.56
Propagation condition		-	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 62 ms in the test. $T_{interrupt}$ is defined in clause 6.3.1.0.2.

This gives a total of 72 ms.

6.3.1.2 NR SA FR1 handover with unknown target cell

6.3.1.2.1 Test purpose

To verify the UE's ability to perform NR FR1-NR FR1 intra frequency handover in RRC_CONNECTED state by meeting the delay requirement and interruption length for handover to an unknown target cell.

6.3.1.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.3.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.2.

6.3.1.2.4 Test description

6.3.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.1.2.4.1-1.

Table 6.3.1.2.4.1-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.1.2.4.1-2

Table 6.3.1.2.4.1-2: Initial conditions for NR SA FR1 handover with unknown target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.1.2.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.3.1.2.4.1-4 below.

Table 6.3.1.2.4.1-3: General test parameters Intra-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	

6.3.1.2.4.2 Test procedure

The test scenario comprises of one NR carrier and two cells on the carrier as given in tables 6.3.1.2.4.1-3 and 6.3.1.2.5-1. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and start to transmit the PRACH to Cell 2. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 6.3.1.2.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.
3. SS shall transmit an RRCReconfiguration message implying handover to Cell 2.
4. The start of T2 is the instant when the last TTI containing the RRC reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 6.3.1.2.5-1. T2 starts.
5. If the UE transmits the uplink PRACH channel to Cell 2 less than 92 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
6. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.
7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.3.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.2-2 with Condition RBConfig_KeyChange

6.3.1.2.5 Test requirements

Table 6.3.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.1.2.5-1: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf. 2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1 FR1			
SSB configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			PRACH.1 FR1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98		-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s/I_{ot}$		dB	8	-0.64	-Infinity	-0.64
$\hat{E}_s/N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-90
	Config 3	dBm/SCS	-87	-87	-Infinity	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-57.95	-61.41	-57.95
	Config 3	dBm/ 38.16MHz	-55.31	-51.84	-55.31	-51.84
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 92 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 82 ms in the test. $T_{interrupt}$ is defined in clause 6.3.1.0.2.

This gives a total of 92 ms.

6.3.1.3 NR SA FR1-FR1 handover with unknown target cell

6.3.1.3.1 Test purpose

To verify the UE's ability to perform NR FR1-NR FR1 inter frequency handover in RRC_CONNECTED state by meeting the delay requirement and interruption length for handover to an unknown target cell.

6.3.1.3.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.3.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.3.

6.3.1.3.4 Test description

6.3.1.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.1.3.4-1.

Table 6.3.1.3.4.1-1: Inter-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.1.3.4.1-2

Table 6.3.1.3.4.1-2: Initial conditions for NR SA FR1 handover with unknown target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.1.3.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Tables 6.3.1.3.4.1-3 and 6.3.1.3.5-1 below.

Table 6.3.1.3.4.1-3: General test parameters Inter-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤5	

6.3.1.3.4.2 Test procedure

The test scenario comprises of two NR carriers and one cell on each carrier as given in tables 6.3.1.3.4.1-3 and 6.3.1.3.5-1. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and start to transmit the PRACH to Cell 2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 6.3.1.3.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. SS shall transmit an RRCReconfiguration message implying handover to Cell 2.

4. The start of T2 is the instant when the last TTI containing the RRC reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 6.3.1.3.5-1. T2 starts.

5. If the UE transmits the uplink PRACH channel to Cell 2 less than 132 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

6. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.

7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.3.1.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.2-2 with Condition RBConfig_KeyChange

6.3.1.3.5 Test requirements

Table 6.3.1.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.1.3.5-1: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OP.1			
SMTC configuration	Config 1,2		SMTC.1 FR1			
	Config 3		SMTC.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98		-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1,2	dBm/SCS	-94	-94	-Infinity	-93
	Config 3	dBm/SCS	-91	-91	-Infinity	-90
Io Note3	Config 1,2	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-57.75
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

The UE shall start to transmit the PRACH to Cell 2 less than 132 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 122 ms in the test. $T_{interrupt}$ is defined in clause 6.3.1.0.2.

This gives a total of 132 ms.

6.3.1.4 NR SA FR1 – E-UTRA handover with known target cell

6.3.1.4.1 Test purpose

To verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1.

6.3.1.4.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.3.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.4.

6.3.1.4.4 Test description

6.3.1.4.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 6.3.1.4.4.1-1.

Table 6.3.1.4.4.1-1: Supported test configurations

Configuration	Description
6.3.1.4-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE FDD
6.3.1.4-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE FDD
6.3.1.4-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE FDD
6.3.1.4-4	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE TDD
6.3.1.4-5	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE TDD
6.3.1.4-6	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 6.3.1.4.4.1-2.

Table 6.3.1.4.4.1-2: Initial conditions for NR SA FR1 – E-UTRA handover with known target cell

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.4.4.1-1.	
Propagation conditions	AWGN	As specified in Annex C.2.2.

Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 6.3.1.4.4.1-3.

2. Message contents are defined in clause 6.3.1.4.4.3.

3. The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 6.3.1.4.4.1-3: General test parameters for SA inter-RAT E-UTRAN handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	As specified in Table 6.3.1.4.5-1	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN		dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in TS 38.133 [6], table 9.1.2-1 started before T2 starts
T1		s	5	
T2		s	≤5	
T3		s	1	

6.3.1.4.4.2 Test procedure

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 of TS 38.133 [6] is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the next instant after the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 6.3.1.4.5-1 and 6.3.1.4.5-2. T1 starts.

3. The SS shall transmit an RRCReconfiguration message.

4. The UE shall transmit RRCReconfigurationComplete message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.1.4.5-1 and 6.3.1.4.5-2.
6. UE shall transmit a MeasurementReport message triggered by Event B2.
7. SS shall transmit an RRCReconfiguration message implying handover to Cell 2.
8. The start of T3 is the next instant after the last TTI containing the RRCReconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power setting from T2 to T3 as specified in Table 6.3.1.4.5-1 and 6.3.1.4.5-2.
9. If the UE transmits the uplink PRACH channel to Cell 2 less than 85 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
10. The UE shall transmit *RRCConnectionReconfigurationComplete* message on Cell 2.
11. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
12. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.3.1.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-RAT and GAP NEEDED Table H.3.1-3A Table H.3.1-4A Table H.3.1-5 Table H.3.1-6 with Condition Pattern #0 Table H.3.1-7 with Condition INTER-RAT Table H.3.3-1
Specific message contents exceptions for Test Configuration 6.3.1.4-1, 6.3.1.4-2, 6.3.1.4-4 and 6.3.1.4-5	Table H.3.1-3 with Condition SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 6.3.1.4-3 and 6.3.1.4-6	Table H.3.1-3 with Condition SSB.2 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.3.1.4.4.3-2: *PRACH-Config-DEFAULT*: Inter-RAT handover to E-UTRAN known cell

Derivation Path: TS 36.508 [25], Table 4.6.3-7			
Information Element	**Value/remark**	**Comment**	**Condition**
PRACH-Config-DEFAULT ::= SEQUENCE {			
prach-ConfigInfo SEQUENCE {			
prach-ConfigIndex	4		Config 1, 2, 3
	53		Config 4, 5, 6
}			
}			

Table 6.3.1.4.4.3-3: *RRCConnectionReconfiguration*: Inter-RAT handover to E-UTRAN known cell

Derivation Path: TS 36.508 [25], Table 4.6.1-8			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfiguration ::= SEQUENCE {			
securityConfigHO	Not present		
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v890-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v920-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1020-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1130-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1250-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1310-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1430-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1510-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1530-IEs	
securityConfigHO-v1530 {			
handoverType-v1530 CHOICE {	fivegc-ToEPC-r15		
fivegc-ToEPC-r15 {			
securityAlgorithmConfig-r15 {			
cipheringAlgorithm	eea0		
integrityProtAlgorithm	eia1		
}			
nextHopChainingCount-r15	2		
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			

6.3.1.4.5 Test requirement

Tables 6.3.1.4.4.1-3, 6.3.1.4.5-1 and 6.3.1.4.5-2 define the primary level settings including test tolerances for intra frequency NR cell re-selection test case.

Table 6.3.1.4.5-1: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	1		
Duplex mode		1, 4	FDD		
		2, 3, 5, 6	TDD		

TDD Configuration			2, 5	TDDConf.1.1		
			3, 6	TDDConf.2.1		
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)		
			2, 5	10: $N_{RB,c}$ = 52 (TDD)		
			3, 6	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
TRS configuration			1, 4	TRS.1.1 FDD		
			2, 5	TRS.1.1 TDD		
			3, 6	TRS.1.2 TDD		
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		
b2-Threshold1		dBm	1, 2, 4, 5	-94		
			3, 6	-91		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-100	-104	-100
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-100	-104	-100
			3, 6	-97	-101	-97
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	12	0	0
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	12	0	0
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	-88	-104	-100
			3, 6	-85	-101	-97
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-59.78	-73.04	-69.04
		dBm/38.16 MHz	3, 6	-53.68	-66.93	-62.93
Propagation condition			1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.3.1.4.5-2: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration[Note1]		4, 5, 6	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5MHz: $N_{RB,c}$ = 25 10MHz: $N_{RB,c}$ = 50 20MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1, 2, 3	4		
		4, 5, 6	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5MHz: R.7 FDD 10MHz: R.3 FDD 20MHz: R.6 FDD		
		4, 5, 6	5MHz: R.4 TDD 10MHz: R.0 TDD 20MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5MHz: R.11 FDD 10MHz: R.6 FDD 20MHz: R.10 FDD		
		4, 5, 6	5MHz: R.11 TDD 10MHz: R.6 TDD 20MHz: R.10 TDD		
OCNG Patterns[Note3]		1, 2, 3	5MHz: OP.20 FDD 10MHz: OP.10 FDD 20MHz: OP.17 FDD		
		4, 5, 6	5MHz: OP.9 TDD 10MHz: OP.1 TDD 20MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	9.55	9.55
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2, 3, 4, 5, 6	-Infinity	9.55	9.55
RSRP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-88.45	-88.45
SCH_RP[Note6]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-88.45	-88.45
Io[Note6]	dBm/Ch BW	1, 2, 3, 4, 5, 6	-67.21 +10log ($N_{RB,c}$ /100)	-57.20 +10log ($N_{RB,c}$ /100)	-57.20 +10log ($N_{RB,c}$ /100)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix[Note7]		1, 2, 3, 4, 5, 6	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211[24].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211[24].
Note 3: DL RMCs and OCNG patterns are specified in sections A 3.1 and A 3.2 of TS 36.133 [6] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
Note 7: Propagation condition and correlation matrix are defined in section B.2 in TS 36.101 [27].					

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in section 6.1.2.1 of TS 38.133 [6].

$T_{interrupt}$ = 35 ms in the test; $T_{interrupt}$ is defined in section 6.1.2.1 of TS 38.133 [6].

This gives a total of 85 ms.

6.3.1.5 NR SA FR1 – E-UTRA handover with unknown target cell

6.3.1.5.1 Test purpose

To verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in section 6.1.2.1 of TS 38.133 [6].

6.3.1.5.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.3.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.2.

6.3.1.5.4 Test description

6.3.1.5.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 6.3.1.5.4.1-1.

Table 6.3.1.5.4.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
6.3.1.5-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE FDD
6.3.1.5-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE FDD
6.3.1.5-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE FDD
6.3.1.5-4	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE TDD
6.3.1.5-5	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE TDD
6.3.1.5-6	NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 6.3.1.5.4.1-2.

Table 6.3.1.5.4.1-2: Initial conditions for NR SA FR1 – E-UTRA handover with unknown target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	

Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 6.3.1.5.4.1-3.

2. Message contents are defined in clause 6.3.1.5.4.3.

3. The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is the E-UTRAN neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2. Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 6.3.1.5.4.1-3: General test parameters for SA inter-RAT E-UTRAN handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
T1		s	≤5	
T2		s	1	

6.3.1.5.4.2 Test procedure

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable. No Gap pattern shall be configured.

An RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last subframe containing the RRC message implying handover is sent to the UE. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and start to transmit the PRACH to Cell 2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 6.3.1.5.5-1 and 6.3.1.5.5-2. T1 starts.

3. SS shall transmit an RRCReconfiguration message implying handover to Cell 2.

4. The start of T2 is the instant when the last subframe containing the RRC Reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 6.3.1.5.5-1 and 6.3.1.5.5-2. T2 starts.

5. If the UE transmits the uplink PRACH channel to Cell 2 less than 165 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

6. The UE shall transmit *RRCConnectionReconfigurationComplete* message on Cell 2.

7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.

9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.3.1.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.3-1

Table 6.3.1.5.4.3-2: *PRACH-Config-DEFAULT*: Inter-RAT handover to E-UTRAN unknown cell

Derivation Path: TS 36.508 [25], Table 4.6.3-7			
Information Element	**Value/remark**	**Comment**	**Condition**
PRACH-Config-DEFAULT ::= SEQUENCE {			
prach-ConfigInfo SEQUENCE {			
prach-ConfigIndex	4		Config 1, 2, 3
	53		Config 4, 5, 6
}			
}			

6.3.1.5.5 Test requirement

Tables 6.3.1.5.4.1-3, 6.3.1.5.5-1 and 6.3.1.5.5-2 define the primary level settings including test tolerances for inter-RAT E-UTRAN handover: unknown target cell test.

Table 6.3.1.5.5-1: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 4	FDD	
			2, 3, 5, 6	TDD	
TDD Configuration			2, 5	TDDConf.1.1	
			3, 6	TDDConf. 2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					

EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6	-98	
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	0	0
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6	0	0
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5	-98	-98
		3, 6	-95	-95
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5	-67.04	-67.04
	dBm/38.16 MHz	3, 6	-60.94	-60.94
Propagation condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.3.1.5.5-2: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5MHz: $N_{RB,c}$ = 25 10MHz: $N_{RB,c}$ = 50 20MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1, 2, 3	4	
		4, 5, 6	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5MHz: R.7 FDD 10MHz: R.3 FDD 20MHz: R.6 FDD	
		4, 5, 6	5MHz: R.4 TDD 10MHz: R.0 TDD 20MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5MHz: R.11 FDD 10MHz: R.6 FDD 20MHz: R.10 FDD	
		4, 5, 6	5MHz: R.11 TDD 10MHz: R.6 TDD 20MHz: R.10 TDD	
OCNG Patterns[Note3]		1, 2, 3	5MHz: OP.20 FDD 10MHz: OP.10 FDD 20MHz: OP.17 FDD	
		4, 5, 6	5MHz: OP.9 TDD 10MHz: OP.1 TDD 20MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	

PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note4				
OCNG_RB Note4				
N_{oc} Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/I_{ot}$ Note6	dB	1, 2, 3, 4, 5, 6	-Infinity	7
RSRP Note6	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-91
SCH_RP Note6	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-91
Io Note6	dBm/9MHz	1, 2, 3, 4, 5, 6	-70.22	-62.43
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix Note7		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.				
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211.				
Note 3: DL RMCs and OCNG patterns are specified in sections A 3.1 and A 3.2 of TS 36.133 respectively.				
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 7: Propagation condition and correlation matrix are defined in section B.2 in TS 36.101 [27].				

The UE shall start to transmit the PRACH to Cell 2 less than 165 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in section 6.1.2.1 of TS 38.133 [6].

$T_{interrupt}$ = 115 ms in the test; $T_{interrupt}$ is defined in section 6.1.2.1 of TS 38.133 [6].

This gives a total of 165 ms.

6.3.1.6 NR SA FR1 – UTRAN FDD handover with known target cell

6.3.1.6.1 Test purpose

To verify that the UE can make correct inter-RAT UTRAN handover when operating in standalone (SA) operation with PCell in FR1.

6.3.1.6.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and support UTRA FDD.

6.3.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.6.

6.3.1.6.4 Test description

6.3.1.6.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 6.3.1.6.4.1-1.

Table 6.3.1.6.4.1-1: Supported test configurations

Configuration	Description
6.3.1.6-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, UTRAN FDD
6.3.1.6-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, UTRAN FDD
6.3.1.6-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, UTRAN FDD
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 6.3.1.6.4.1-2.

Table 6.3.1.6.4.1-2: Initial conditions for NR SA FR1 – UTRAN handover with known target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-3 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	UE Part	A.3.2.3.2	
Exceptions to connection diagram	SS LTE in Figure A.3.1.8.2 is replaced by SS UTRA Faders in Figure A.3.1.8.2 are removed. LTE TX/RX in Figure A.3.2.3.2 is replaced by UTRA TX/RX		

1. The general test parameter settings are set up according to Table 6.3.1.6.4.1-3.

2. Message contents are defined in clause 6.3.1.6.4.3.

3. The test comprises of one NR carrier and one UTRAN carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT UTRAN neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 Annex C.0 and C.1.

Table 6.3.1.6.4.1-3: General test parameters for SA inter-RAT UTRAN handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
UTRA RF Channel Number			2	1 UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
Inter-RAT (UTRAN FDD) measurement quantity			CPICH Ec/N0	
b2-Threshold1		dBm	As specified in Table 6.3.1.6.5-1	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2UTRA-FDD		dB	-18	Absolute UTRAN CPICH Ec/Io threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in TS 38.133 [6] Table 9.1.2-1 started before T2 starts
T1		s	5	
T2		s	≤5	
T3		s	1	

6.3.1.6.4.2 Test procedure

The test comprises of one NR carrier and one UTRAN carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT UTRAN neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 of TS 38.133 [6] is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 6.3.1.6.5-1 and 6.3.1.6.5-2. T1 starts.
3. The SS shall transmit an *RRCReconfiguration* message to configure Event B2 measurement reporting.
4. The UE shall transmit an *RRCReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.1.6.5-1 and 6.3.1.6.5-2.
6. UE shall transmit a *MeasurementReport* message triggered by Event B2.
7. SS shall transmit a *MobilityFromNRCommand* message implying handover to Cell 2.
8. T3 starts when the last TTI containing the *MobilityFromNRCommand* message implying handover is sent to the UE, at that instant the SS shall switch the power setting from T2 to T3 as specified in Table 6.3.1.6.5-1 and 6.3.1.6.5-2.
9. If the UE transmits the uplink PRACH channel to Cell 2 less than 85 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
10. The UE shall transmit HANDOVER TO UTRAN COMPLETE message on Cell 2.
11. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
12. The SS shall set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code - 50) mod 200 + 100) for next iteration of the test procedure loop.
13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.1.6.4.3 Message contents

Table 6.3.1.6.4.3-1: RRCReconfiguration (Step 3)

Derivation Path: TS 38.508-1 [14] Table 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 6.3.1.6.4.3-2	
}			
}			
}			

Table 6.3.1.6.4.3-2: MeasConfig (Table 6.3.1.6.4.3-1)

Derivation Path: Table H.3.1-2 with condition INTER-RAT and GAP NEEDED

Information Element	Value/remark	Comment	Condition
MeasConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod {	2 entries		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT specified in Table H.3.1-3 with condition INTRA-FREQ MO		
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		entry 2	
measObjectId	2		
measObject CHOICE {			
measObjectUTRA-FDD-r16	MeasObjectUTRA-FDD	Table 6.3.1.6.4.3-3	
}			
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigInterRAT	ReportConfigInterRAT(*13*, *60*) specified in 38.508-1 [14] Table 4.6.3-141 with condition EVENT_B2_UTRA	Actual value of thresholds are: UTRA threshold = (13-49)/2 = -18dB NR threshold = 60-156 = -96dBm	6.6.1.6-1, 6.6.1.6-2
	ReportConfigInterRAT(*13*, *63*) specified in 38.508-1 [14] Table 4.6.3-141 with condition EVENT_B2_UTRA	Actual value of thresholds are: UTRA threshold = (13-49)/2 = -18dB NR threshold = 63-156 = -93dBm	6.6.1.6-3
}			
}			
}			
measGapConfig	MeasGapConfig specified in Table H.3.1-6 with condition gapUE and Pattern #0		
}			

Table 6.3.1.6.4.3-3: MeasObjectUTRA-FDD (Table 6.3.1.6.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-77A			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectUTRA-FDD-r16 ::= SEQUENCE {			
carrierFreq-r16	ARFCN-ValueUTRA-FDD-r16 for UTRA Cell 2		
}			

Table 6.3.1.6.4.3-4: MeasurementReport (Step 6)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-5A			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasurementReport ::= SEQUENCE {			

criticalExtensions CHOICE {			
measurementReport SEQUENCE {			
measResults	MeasResults	Table 6.3.1.6.4.3-5	
}			
}			
}			

Table 6.3.1.6.4.3-5: MeasResults (Table 6.3.1.6.4.3-4)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-79 with condition B2_UTRA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measResultNeighCells CHOICE {			
measResultListUTRA-FDD-r16 SEQUENCE (SIZE (1..maxCellReport)) OF MeasResultUTRA-FDD-r16 {	1 entry		
MeasResultUTRA-FDD-r16[1] SEQUENCE {		entry 1	
physCellId-r16	PhysCellIdUTRA-FDD-r16 of UTRA Cell 2		
measResult-r16 SEQUENCE {			
utra-FDD-EcN0-r16	INTEGER (0..49)		
}			
}			
}			
}			
}			

Table 6.3.1.6.4.3-6: MobilityFromNRCommand (Step 7)

Derivation Path: TS 38.508-1 [14] Table 4.6.1-8 with condition HO-TO-UTRA_FDD

6.3.1.6.5 Test requirement

Tables 6.3.1.6.5-1 and 6.3.1.6.5-2 define the primary level settings including test tolerances for intra frequency NR cell re-selection test case.

Table 6.3.1.6.5-1: Cell specific test parameters for SA inter-RAT UTRAN FDD handover (Cell 1)

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3	1		
Duplex mode			1	FDD		
			2, 3	TDD		
TDD Configuration			2	TDDConf.1.1		
			3	TDDConf.2.1		
$BW_{channel}$		MHz	1	10: $N_{RB,c}$ = 52 (FDD)		
			2	10: $N_{RB,c}$ = 52 (TDD)		
			3	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1	SR.1.1 FDD		
			2	SR.1.1 TDD		
			3	SR.2.1 TDD		
CORSET reference channel			1	CR.1.1 FDD		
			2	CR.1.1 TDD		
			3	CR.2.1 TDD		
TRS configuration			1	TRS.1.1 FDD		
			2	TRS.1.1 TDD		
			3	TRS.1.2 TDD		
OCNG pattern[Note1]			1, 2, 3	OP.1		
BWP	Initial DL BWP		1, 2, 3	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3	SMTC.1		
SSB configuration			1, 2	SSB.1 FR1		
			3	SSB.2 FR1		
b2-Threshold1		dBm	1, 2	-96		
			3	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3	-101.54		
N_{oc}[Note2]		dBm/SCS	1, 2,	-101.54		
			3	-98.54		
$\hat{E}_s/N_{oc}$		dB	1, 2, 3	12	-4	-4
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3	12	-4	-4
SS-RSRP[Note3]		dBm/SCS	1, 2	-89.54	-105.54	-105.54
			3	-86.54	-102.54	-102.54
Io[Note3]		dBm/9.36 MHz	1, 2	-61.32	-72.13	-72.13
		dBm/38.16 MHz	3	-55.22	-66.03	-66.03
Propagation condition			1, 2, 3	AWGN		
Antenna Configuration and Correlation Matrix			1, 2, 3	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.3.1.6.5-2: Cell specific test parameters for SA inter-RAT UTRAN FDD handover (Cell 2)

Parameter	Unit	Cell 2 (UTRA)		
		T1	T2	T3
UTRA RF Channel Number		2		
CPICH_Ec/Ior	dB	-10		
PCCPCH_Ec/Ior	dB	-12		
SCH_Ec/Ior	dB	-12		
PICH_Ec/Ior	dB	-15		
DCH_Ec/Ior	dB	N/A	N/A	Note 1
OCNS_Ec/Ior	dB	-0.941	0.941	Note 2
$\hat{I}_{or}/I_{oc}$	dB	-infinity	-1.8	-1.8
I_{oc}	dBm/3,84 MHz	-70	-70	-70
CPICH_Ec/Io	dB	-infinity	-14	-14
Propagation Condition		AWGN		

Note 1: The DPCH level is controlled by the power control loop
Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or}.

The UE shall start to transmit the UL DPCCH to Cell 2 less than 190 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms, which is specified in clause 5.3.1.1.1.

$T_{interrupt}$ = 140 ms in the test; $T_{interrupt}$ is defined in clause 5.3.1.1.2. This gives a total of 190 ms.

6.3.1.7 NR SA FR1 synchronous DAPS handover

6.3.1.7.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 intra frequency DAPS handover requirements in synchronous scenario specified in TS 38.133 [6] clause 6.1.3.2.

6.3.1.7.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and support intra-frequency DAPS handover.

6.3.1.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.7.

6.3.1.7.4 Test description

6.3.1.7.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.1.7.4.1-1.

Table 6.3.1.7.4.1-1: NR SA FR1 synchronous DAPS handover test configurations

Config	Description
6.3.1.7-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.1.7-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.1.7-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.1.7.4.1-2

Table 6.3.1.7.4.1-2: Initial conditions for NR SA FR1 synchronous DAPS handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.7.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.1.7.4.3.

2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Table 6.3.1.7.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.1.7.4.1-3: General test parameters for NR SA FR1 synchronous DAPS handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	-1	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	
T4		ms	$D_{handover2}$	$D_{Handover2}$ is defined in TS 38.133 [6] clause 6.1.3.2.1
T5		ms	100	

6.3.1.7.4.2 Test procedure

The test scenario comprises of 1 NR carrier and two cells, Cell 1 and Cell 2, on this carrier. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 6.3.1.7.4.1-3 and 6.3.1.7.5-1 respectively. No measurement gap is configured in the test case. Both Cell 1 and Cell 2 belong to the same TAG.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to the Cell 1 and not aware of the Cell 2. During T1, the UE does not have any timing information of the Cell 2.

From start of T2, the Cell 2 becomes detectable. During T2, the UE performs cell detection and measurements on the Cell 2 and shall send event report to the network. After receiving the event report A3, the network sends a RRC message implying DAPS handover command for target cell addition to the UE.

T3 starts from the instant when the last TTI containing DAPS handover command for target cell addition sent to the UE. During T3, UE shall be able to perform random access, DL reception or UL transmission in the Cell 2 while the DL scheduling and UL feedback in the Cell 1 shall be avoided. After successful RACH procedure on the Cell 2, UE is scheduled with PDSCH from Cell 1 and Cell 2 in alternative TTIs. In the end of T3 the network sends a RRC message implying DAPS handover command for source cell release to the UE. During T3, the handover delay $D_{handover1}$ for target cell addition need to be verified.

T4 starts from the instant when the last TTI containing DAPS handover command for source cell release sent to the UE. During T4, the UE shall accomplish the release actions within $D_{handover2}$

From start of T5, the UE shall stop sending periodical CSI report on Cell 1.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration message*. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 6.3.1.7.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts and the SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message to configure event A3 triggered measurement reporting on the intra-frequency carrier and periodical CSI reporting on Cell 1.

5. The UE shall transmit an *RRCReconfigurationComplete* message.
6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.1.7.5-1.
7. UE shall transmit a *MeasurementReport* message triggered by Event A3.
8. SS shall transmit an *RRCReconfiguration* with *reconfigurationWithSync* message which reconfiguring DRB as a DAPS radio bearer to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 6.3.1.7.5-1. T3 starts and the SS stops scheduling the UE to perform DL reception on Cell 1.
9. If the UE transmits PRACH preamble to Cell 2 within $D_{handover1}$ from the beginning of time period T3 then the number of successful tests is increased by one, continue to step 10. Otherwise, the number of failure tests is increased by one, go to step 17. where:

   - $D_{handover1}$ = 72 ms.

10. The UE transmits an *RRCReconfigurationComplete* message on Cell 2.
11. Upon receiving *RRCReconfigurationComplete* message sent by UE, the SS immediately starts scheduling UE to perform DL reception in Cell 1 and Cell 2 in an alternative manner, and monitoring corresponding ACK/NACK feedbacks sent by the UE.
12. Upon T3 expiring, the SS immediately transmit an *RRCReconfiguration* with *daps-SourceRelease-r16 = true* on Cell 2 to the UE. T4 starts.
13. When T4 expires, T5 starts.
15. If

    a) The UE can report ACK/NACK from the first DL reception scheduled on Cell 2 after the beginning of time period T5,

    and

    b) The UE doesn't send periodical CSI report on Cell 1 during entire time period T5.

    then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

16. After T5 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.
17. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.
18. Repeat steps 2-17 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.3.1.7.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 6.3.1.7.4.3-3	
nonCriticalExtension SEQUENCE {			
masterCellGroup SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 6.3.1.7.4.3-2	
}			

}			
}			
}			
}			

Table 6.3.1.7.4.3-2: ServingCellConfig (Table 6.3.1.7.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM Specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 6.3.1.7.4.3-3: MeasConfig (Table 6.3.1.7.4.3-1)

Derivation path: Table H.3.1-2			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfig[1] CHOICE {			
reportConfigNR	ReportConfigNR(-1) specified in Table H.3.1-4	Acutal value of A3-offset is -1dB	
}			
}			
}			

Table 6.3.1.7.4.3-4: MeasurementReport (Step 7)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-5A			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasurementReport ::= SEQUENCE {			
criticalExtensions CHOICE {			
measurementReport SEQUENCE {			
measResults	MeasResults specified in Table H.3.1-7 with condition INTRA-FREQ		
}			
}			
}			

Table 6.3.1.7.4.3-5: RRCReconfiguration (Step 8)

Derivation Path: TS 38.508-1 [4], Table 4.8.1-1A with Condition RBConfig_NoKeyChange			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
radioBearerConfig	RadioBearerConfig	Table 6.3.1.7.4.3-6	
nonCriticalExtension SEQUENCE{			
masterCellGroup	CellGroupConfig	Table 6.3.1.7.4.3-7	
}			
}			
}			
}			

Table 6.3.1.7.4.3-6: RadioBearerConfig (Table 6.3.1.7.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-132 with condition DRB1			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF DRB-ToAddMod {	1 entry		
DRB-ToAddMod[1] SEQUENCE {		entry 1	
drb-Identity	DRB-Identity using condition DRBn	DRB #n is a DRB established before DAPS HO. Actual value of n is left to TE implementation	
daps-Config-r16	true		
}			
}			
securityConfig	Not present		
}			

Table 6.3.1.7.4.3-7: CellGroupConfig (Table 6.3.1.7.4.3-6)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition PCell_change			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
rlc-BearerToAddModList	Not present		
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			
spCellConfigCommon SEQUENCE {			
physCellId	PhysCellId for Cell 2		
}			
}			
}			
}			

Table 6.3.1.7.4.3-8: RRCReconfiguration (Step 12)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition DAPS_HO_ReleaseSource

6.3.1.7.5 Test requirements

Table 6.3.1.7.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.1.7.5-1: Cell specific test parameters for NR SA FR1 synchronous DAPS handover

Parameter		**Unit**	**Cell 1**		**Cell 2**	
			T1	**T2 – T5**	**T1**	**T2 – T5**
NR RF Channel Number			1			
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			

PDSCH Reference measurement channel	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
reportConfigType			periodic	N/A		
reportQuantity			cri-RI-PMI-CQI	N/A		
CSI reporting periodicity	Config 1,2	slot	5	N/A		
	Config 3		10	N/A		
CSI reporting offset	Config 1,2	slot	3	N/A		
	Config 3		5	N/A		
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-2.41	-Infinity	1.36
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	10
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-88
	Config 3	dBm/SCS	-87	-87	-Infinity	-85
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-57.67	-61.41	-57.67
	Config 3	dBm/ 38.16MHz	-55.31	-51.56	-55.31	-51.56
Propagation condition			AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than $D_{handover1}$ from the beginning of time period T3. The rate of correct handovers observed during repeated tests shall be at least 90%, where:

$D_{handover1} = T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

- $T_{RRC_procedure}$= 10 ms, is the RRC procedure delay specified in TS 38.331 [13] clause 12;

- T_{search} = 0 ms for known target cell, is the time required to search the target cell specified in 38.133 [6] clause 6.1.1.2.2;

- T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell specified in TS 38.133 [6] clause 6.1.1.2.2.

- $T_{processing}$ = 20 ms, is the time for UE processing specified in TS 38.133 [6] clause 6.1.1.2.2.

- T_{Δ} = 20 ms, is the time for fine time tracking and acquiring full timing information of the target cell specified in TS 38.133 [6] clause 6.1.1.2.2.

- T_{margin} = 2 ms, is the time for SSB post-processing specified in TS 38.133 [6] clause 6.1.1.2.2.

This gives a total of 72 ms.

After successful RACH to cell 2 and until the start of time period T4, UE shall be able to receive PDSCH alternatively from cell 1 and cell 2. UE is not expected to transmit UL to both cell 1 and cell 2 in the same TTI.

The UE shall release Cell 1 less than $D_{handover2}$ from the beginning of time period T4, where:

$D_{handover2} = T_{RRC_procedure} + T_{interrupt2}$

- $T_{RRC_procedure}$= 10 ms, is the RRC procedure delay specified in TS 38.331 [13] clause 12;

- $T_{interrupt2}$ = 1 ms for sync intra-frequency DAPS handover, is the allowed interruption length during $D_{handover2}$ as in TS 38.133 [13] clause 6.1.3.2.2;

This gives a total of 11 ms.

UE shall not report CSI to Cell 1 during T5.

6.3.1.8 NR SA FR1 asynchronous DAPS handover

6.3.1.8.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 intra-frequency DAPS handover requirements in asynchronous scenario specified in TS 38.133 [6] clause 6.1.3.2.

6.3.1.8.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and support intra-frequency asynchronous DAPS handover.

6.3.1.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.8.

6.3.1.8.4 Test description

6.3.1.8.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.1.8.4.1-1.

Table 6.3.1.8.4.1-1: NR SA FR1 asynchronous DAPS handover test configurations

Config	Description
6.3.1.8-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.1.8-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.1.8-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.1.8.4.1-2

Table 6.3.1.8.4.1-2: Initial conditions for NR SA FR1 asynchronous DAPS handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.8.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.1.8.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.3.1.8.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.1.8.4.1-3: General test parameters for NR SA FR1 asynchronous DAPS handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	-1	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			7 µs	Asynchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	
T4		ms	$D_{handover2}$	$D_{Handover2}$ is defined in TS 38.133 [6] clause 6.1.3.2.1
T5		ms	100	

6.3.1.8.4.2 Test procedure

Same test procedure as described in section 6.3.1.7.4.2.

6.3.1.8.4.3 Message contents

Same message contents as described in section 6.3.1.7.4.3.

6.3.1.8.5 Test requirements

Table 6.3.1.8.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.1.8.5-1: Cell specific test parameters for NR SA FR1 asynchronous DAPS handover

Parameter		Unit	Cell 1		Cell 2	
			T1	T2 – T5	T1	T2 – T5
NR RF Channel Number			1			
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
CSI-RS CSI configuration for reporting	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
reportConfigType			periodic		N/A	
reportQuantity			cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	Config 1,2	slot	5		N/A	
	Config 3		10		N/A	
CSI reporting offset	Config 1,2	slot	3		N/A	
	Config 3		5		N/A	
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						

EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-2.41	-Infinity	1.36
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	10
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-88
	Config 3		-87	-87	-Infinity	-85
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-57.67	-61.41	-57.67
	Config 3	dBm/ 38.16MHz	-55.31	-51.56	-55.31	-51.56
Propagation condition			AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Same test requirements as described in section 6.3.1.7.5 except:

The UE shall release Cell 1 less than $D_{handover2}$ from the beginning of time period T4, where:

$D_{handover2} = T_{RRC_procedure} + T_{interrupt2}$

- $T_{RRC_procedure}$= 10 ms, is the RRC procedure delay specified in TS 38.331 [13] clause 12;
- $T_{interrupt2}$ = 2 slots for test configuration 6.3.1.8-1/2 and $T_{interrupt2}$ = 3 slots for test configuration 6.3.1.8-3, is the allowed interruption length during $D_{handover2}$ as in TS 38.133 [13] clause 6.1.3.2.2;

This gives a total of 10 ms + 2 slots for test configuration 6.3.1.8-1/2 and 10 ms + 3 slots for test configuration 6.3.1.8-3.

6.3.1.9 NR SA FR1 Intra-band inter-frequency synchronous DAPS handover

6.3.1.9.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 intra-band inter-frequency DAPS handover requirements in synchronous scenario specified in TS 38.133 [6] clause 6.1.3.2.

6.3.1.9.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and support intra-band inter-frequency DAPS handover.

6.3.1.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.9.

6.3.1.9.4 Test description

6.3.1.9.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.1.9.4.1-1.

Table 6.3.1.9.4.1-1: NR SA FR1 Intra-band inter-frequency synchronous DAPS handover test configurations

Config	Description
6.3.1.9-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.1.9-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.1.9-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.1.9.4.1-2

Table 6.3.1.9.4.1-2: Initial conditions for NR SA FR1 Intra-band inter-frequency synchronous DAPS handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1. Note 1		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.9.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		
Note 1: For UE supporting DAPS HO on intra-band contiguous BC, the test frequencies are selected according to E.1.4.2. For UE supporting DAPS HO on intra-band non-contiguous BC, the test frequencies are selected according to E.1.4.3			

1. Message contents are defined in clause 6.3.1.9.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.3.1.9.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.1.9.4.1-3: General test parameters for NR SA FR1 Intra-band inter-frequency synchronous DAPS handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	-3	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			0 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	
T4		ms	10 + $T_{interrupt2}$	$T_{interrupt2}$ is defined in TS 38.133 [6] 6.1.3.2.2 Table 6.1.3.2.2-6
T5		ms	100	

6.3.1.9.4.2 Test procedure

The test scenario comprises of two NR carriers and one cell on each carrier, Cell 1 and Cell 2. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 6.3.1.9.4.1-3 and 6.3.1.9.5-1 respectively.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to the Cell 1 and not aware of the Cell 2. During T1, the UE may not have any timing information of the Cell 2. Gap pattern ID gp0 is configured as specified in 38.133 [6] Table 9.1.2-1 before T2 in the test case.

From start of T2, the Cell 2 becomes detectable. During T2, the UE performs cell detection and measurements on the Cell 2 and shall send event report to the network. After receiving the event report A3, the network sends a RRC message implying DAPS handover command for target cell addition to the UE.

T3 starts from the instant when the last TTI containing DAPS handover command for target cell addition sent to the UE. During T3, UE shall be able to perform random access, DL reception or UL transmission in the Cell 2 while the DL scheduling and UL feedback in the Cell 1 shall be avoided. After successful RACH procedure on the Cell 2, UE is scheduled with PDSCH from Cell 1 and Cell 2 in alternative TTIs. In the end of T3 the network sends a RRC message implying DAPS handover command for source cell release to the UE. During T3, the handover delay $D_{handover1}$ for target cell addition need to be verified.

T4 starts from the instant when the last TTI containing DAPS handover command for source cell release sent to the UE. Cell 2 is continuously scheduled in DL during T4.During T4, the UE shall accomplish the release actions within $D_{handover2}$

From start of T5, the UE shall stop sending periodical CSI report on Cell 1. And the test system shall observe the periodic reporting of CSI for Cell 1 during T5.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 6.3.1.9.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts and the SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message to configure event A3 triggered measurement reporting on the intra-band inter-frequency carrier and periodical CSI reporting on Cell 1.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.1.9.5-1.

7. UE shall transmit a *MeasurementReport* message triggered by Event A3.

8. SS shall transmit an *RRCReconfiguration* with *reconfigurationWithSync* message which reconfiguring DRB as a DAPS radio bearer to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 6.3.1.9.5-1. T3 starts and the SS stops scheduling the UE to perform DL reception on Cell 1.

9. If the UE transmits PRACH preamble to Cell 2 within $D_{handover1}$ from the beginning of time period T3 then the number of successful tests is increased by one, continue to step 10. Otherwise, the number of failure tests is increased by one, go to step 17. where:

   - $D_{handover1}$ = 72 ms.

10. The UE transmits an *RRCReconfigurationComplete* message on Cell 2.

11. Upon receiving *RRCReconfigurationComplete* message sent by UE, the SS immediately starts scheduling UE to perform DL reception in Cell 1 and Cell 2 in an alternative manner, and monitoring corresponding ACK/NACK feedbacks sent by the UE.

12. Upon T3 expiring, the SS immediately transmit an *RRCReconfiguration* with *daps-SourceRelease-r16* = *true* on Cell 2 to the UE. T4 starts.

13. When T4 expires, T5 starts.

15. If

c) The UE can report ACK/NACK from the first DL reception scheduled on Cell 2 after the beginning of time period T5,

and

d) The UE doesn't send periodical CSI report during entire time period T5.

then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

16. After T5 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

17. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Cell 1 is the active cell.

18. Repeat steps 2-17 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.1.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.3.1.9.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 6.3.1.9.4.3-3	
nonCriticalExtension SEQUENCE {			
masterCellGroup SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 6.3.1.9.4.3-2	
}			
}			
}			
}			
}			

Table 6.3.1.9.4.3-2: ServingCellConfig (Table 6.3.1.9.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM Specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 6.3.1.9.4.3-3: MeasConfig (Table 6.3.1.9.4.3-1)

Derivation path: Table H.3.1-2 with condition INTER-FREQ			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfig[1] CHOICE {			
reportConfigNR	ReportConfigNR(-3) specified in Table H.3.1-4	Acutal value of A3-threshold is -3 dBm	
}			

}			
}			

Table 6.3.1.9.4.3-4: MeasurementReport (Step 7)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-5A			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasurementReport ::= SEQUENCE {			
criticalExtensions CHOICE {			
measurementReport SEQUENCE {			
measResults	MeasResults specified in Table H.3.1-7 with condition INTER-FREQ		
}			
}			
}			

Table 6.3.1.9.4.3-5: RRCReconfiguration (Step 8)

Derivation Path: TS 38.508-1 [4], Table 4.8.1-1A with Condition RBConfig_NoKeyChange			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
radioBearerConfig	RadioBearerConfig	Table 6.3.1.9.4.3-6	
nonCriticalExtension SEQUENCE{			
masterCellGroup	CellGroupConfig	Table 6.3.1.9.4.3-7	
}			
}			
}			
}			

Table 6.3.1.9.4.3-6: RadioBearerConfig (Table 6.3.1.9.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-132 with condition DRB1			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF DRB-ToAddMod {	1 entry		
DRB-ToAddMod[1] SEQUENCE {		entry 1	
drb-Identity	DRB-Identity using condition DRBn	DRB #n is a DRB established before DAPS HO. Actual value of n is left to TE implementation	
daps-Config-r16	true		
}			
}			
securityConfig	Not present		
}			

Table 6.3.1.9.4.3-7: CellGroupConfig (Table 6.3.1.9.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition PCell_change			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
rlc-BearerToAddModList	Not present		
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			

spCellConfigCommon SEQUENCE {			
physCellId	PhysCellId for Cell 2		
}			
}			
}			
}			

Table 6.3.1.9.4.3-8: RRCReconfiguration (Step 12)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition DAPS_HO_ReleaseSource

6.3.1.9.5 Test requirements

Table 6.3.1.9.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.1.9.5-1: Cell specific test parameters for NR SA FR1 Intra-band inter-frequency synchronous DAPS handover

Parameter		Unit	Cell 1		Cell 2	
			T1	T2-T5	T1	T2-T5
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
reportConfigType					periodic	
reportQuantity					cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2	slot	5		5	
	Config 3		10		10	
CSI reporting offset	Config 1,2	slot	3		3	
	Config 3		5		5	
SMTC Configuration			SMTC.1			

SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	8	-Infinity	11.7
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	11.7
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-86.3
	Config 3	dBm/SCS	-86.99	-86.99	-Infinity	-83.29
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-61.41	-70.05	-58.06
	Config 3	dBm/ 38.16MHz	-55.31	-55.31	-63.94	-51.96
Propagation condition			AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than $D_{handover1}$ from the beginning of time period T3. The rate of correct handovers observed during repeated tests shall be at least 90%, where:

$D_{handover1} = T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

- $T_{RRC_procedure}$= 10 ms, is the RRC procedure delay specified in 38.331 [13] clause 12;

- T_{search} = 0 ms for known target cell, is the time required to search the target cell specified in 38.133 [6] clause 6.1.1.2.2;

- T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell specified in TS 38.133 [6] clause 6.1.1.2.2.

- $T_{processing}$ = 20 ms, is the time for UE processing specified in TS 38.133 [6] clause 6.1.1.2.2.

- T_{Δ} = 20 ms, is the time for fine time tracking and acquiring full timing information of the target cell specified in TS 38.133 [6] clause 6.1.1.2.2.

- T_{margin} = 2 ms, is the time for SSB post-processing specified in 38.133 [6] clause 6.1.1.2.2.

This gives a total of 72 ms.

During T3 UE is allowed to cause $T_{interrupt1}$ interruption to cell 1. $T_{interrupt1}$ is defined in TS 38.133 [6] clause 6.1.3.2.2 Table 6.1.3.2.2-2. When UE is transmitting PRACH preamble to cell 2, interruption to cell 1 is allowed.

During T4 UE is allowed to cause $T_{interrupt2}$ interruption to cell 1. $T_{interrupt2}$ is defined in TS 38.133 [6] clause 6.1.3.2.2 Table 6.1.3.2.2-6.

UE shall finish cell 1 release in T4 and shall not send any CSI reports to cell 1 during T5.

6.3.1.10 NR SA FR1 Intra-band inter-frequency asynchronous DAPS handover

6.3.1.10.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 intra-band inter-frequency DAPS handover requirements in asynchronous scenario specified in TS 38.133 [6] clause 6.1.3.2.

6.3.1.10.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and support intra-band inter-frequency DAPS handover.

6.3.1.10.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.10.

6.3.1.10.4 Test description

6.3.1.10.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.1.10.4.1-1.

Table 6.3.1.10.4.1-1: NR SA FR1 Intra-band inter-frequency asynchronous DAPS handover test configurations

Config	Description
6.3.1.10-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.1.10.4.1-2

Table 6.3.1.10.4.1-2: Initial conditions for NR SA FR1 Intra-band inter-frequency asynchronous DAPS handover

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1. Note 1	

Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.10.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		
Note 1: For UE supporting DAPS HO on intra-band contiguous BC, the test frequencies are selected according to E.1.4.2. For UE supporting DAPS HO on intra-band non-contiguous BC, the test frequencies are selected according to E.1.4.3.			

1. Message contents are defined in clause 6.3.1.10.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.3.1.10.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.1.10.4.1-3: General test parameters for NR SA FR1 Intra-band inter-frequency asynchronous DAPS handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	-3	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			10 µs	Asynchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	
T4		ms	10 + $T_{interrupt2}$	$T_{interrupt2}$ is defined in TS 38.133 [6] 6.1.3.2.2 Table 6.1.3.2.2-6
T5		ms	100	

6.3.1.10.4.2 Test procedure

The test scenario comprises of two NR carriers and one cell on each carrier, Cell 1 and Cell 2. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 6.3.1.10.4.1-3 and 6.3.1.10.5-1 respectively.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to the Cell 1 and not aware of the Cell 2. During T1, the UE may not have any timing information of the Cell 2. Gap pattern ID gp0 is configured as specified in 38.133 [6] Table 9.1.2-1 before T2 in the test case.

From start of T2, the Cell 2 becomes detectable. During T2, the UE performs cell detection and measurements on the Cell 2 and shall send event report to the network. After receiving the event report A3, the network sends a RRC message implying DAPS handover command for target cell addition to the UE.

T3 starts from the instant when the last TTI containing DAPS handover command for target cell addition sent to the UE. During T3, UE shall be able to perform random access, DL reception or UL transmission in the Cell 2 while the DL scheduling and UL feedback in the Cell 1 shall be avoided. After successful RACH procedure on the Cell 2, UE is scheduled with PDSCH from Cell 1 and Cell 2 in alternative TTIs. In the end of T3 the network sends a RRC message implying DAPS handover command for source cell release to the UE. During T3, the handover delay $D_{handover1}$ for target cell addition need to be verified.

T4 starts from the instant when the last TTI containing DAPS handover command for source cell release sent to the UE. During T4, the UE shall accomplish the release actions within $D_{handover2}$

From start of T5, the UE shall stop sending periodical CSI report on Cell 1. And the test system shall observe the periodic reporting of CSI for cell 1 during T5.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 6.3.1.10.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts and the SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message to configure event A3 triggered measurement reporting on the intra-band inter-frequency carrier and periodical CSI reporting on Cell 1.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.1.10.5-1.

7. UE shall transmit a *MeasurementReport* message triggered by Event A3.

8. SS shall transmit an *RRCReconfiguration* with *reconfigurationWithSync* message which reconfiguring DRB as a DAPS radio bearer to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 6.3.1.10.5-1. T3 starts and the SS stops scheduling the UE to perform DL reception on Cell 1.

9. If the UE transmits PRACH preamble to Cell 2 within $D_{handover1}$ from the beginning of time period T3 then the number of successful tests is increased by one, continue to step 10. Otherwise, the number of failure tests is increased by one, go to step 17. where:

   - $D_{handover1}$ = 72 ms.

10. The UE transmits an *RRCReconfigurationComplete* message on Cell 2.

11. Upon receiving *RRCReconfigurationComplete* message sent by UE, the SS immediately starts scheduling UE to perform DL reception in Cell 1 and Cell 2 in an alternative manner, and monitoring corresponding ACK/NACK feedbacks sent by the UE.

12. Upon T3 expiring, the SS immediately transmit an *RRCReconfiguration* with *daps-SourceRelease-r16 = true* on Cell 2 to the UE. T4 starts.

13. The UE transmits an *RRCReconfigurationComplete* message on Cell 2.

13. When T4 expires, T5 starts.

15. If

    e) The UE can report ACK/NACK from the first DL reception scheduled on Cell 2 after the beginning of time period T5,

    and

    f) The UE doesn't send periodical CSI report on Cell 1during entire time period T5.

    then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

16. After T5 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

17. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Cell 1 is the active cell.

18. Repeat steps 2-17 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.1.10.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.3.1.10.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 6.3.1.10.4.3-3	
nonCriticalExtension SEQUENCE {			
masterCellGroup SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 6.3.1.10.4.3-2	
}			
}			
}			
}			
}			

Table 6.3.1.10.4.3-2: ServingCellConfig (Table 6.3.1.10.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM Specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 6.3.1.10.4.3-3: MeasConfig (Table 6.3.1.10.4.3-1)

Derivation path: Table H.3.1-2 with condition INTER-FREQ			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfig[1] CHOICE {			
reportConfigNR	ReportConfigNR(-3) specified in Table H.3.1-4	Acutal value of A3-threshold is -3 dBm	
}			
}			
}			

Table 6.3.1.10.4.3-4: MeasurementReport (Step 7)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-5A			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasurementReport ::= SEQUENCE {			
criticalExtensions CHOICE {			
measurementReport SEQUENCE {			
measResults	MeasResults specified in Table H.3.1-7 with condition INTER-FREQ		
}			
}			
}			

Table 6.3.1.10.4.3-5: RRCReconfiguration (Step 8)

Derivation Path: TS 38.508-1 [4], Table 4.8.1-1A with Condition RBConfig_NoKeyChange			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
radioBearerConfig	RadioBearerConfig	Table 6.3.1.10.4.3-6	
nonCriticalExtension SEQUENCE{			
masterCellGroup	CellGroupConfig	Table 6.3.1.10.4.3-7	
}			
}			
}			
}			

Table 6.3.1.10.4.3-6: RadioBearerConfig (Table 6.3.1.10.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-132 with condition DRB1			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF DRB-ToAddMod {	1 entry		
DRB-ToAddMod[1] SEQUENCE {		entry 1	
drb-Identity	DRB-Identity using condition DRBn	DRB #n is a DRB established before DAPS HO. Actual value of n is left to TE implementation	
daps-Config-r16	true		
}			
}			
securityConfig	Not present		
}			

Table 6.3.1.10.4.3-7: CellGroupConfig (Table 6.3.1.10.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition PCell_change			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
rlc-BearerToAddModList	Not present		
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			
spCellConfigCommon SEQUENCE {			
physCellId	PhysCellId for Cell 2		
}			
}			
}			
}			

Table 6.3.1.10.4.3-8: RRCReconfiguration (Step 12)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition DAPS_HO_ReleaseSource

6.3.1.10.5 Test requirements

Table 6.3.1.10.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.1.10.5-1: Cell specific test parameters for NR SA FR1 Intra-band inter-frequency asynchronous DAPS handover

Parameter		Unit	Cell 1		Cell 2	
			T1		T2 -T5	
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
TDD configuration	Config 1		Not Applicable			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1		SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	15 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1	dBm/SCS	-98			
$\hat{E}_s / I_{ot}$		dB	8	8	- Infinity	11.7
$\hat{E}_s / N_{oc}$		dB	8	8	- Infinity	11.7

SSB_RP	Config 1,2	dBm/SCS	-90	-90	- Infinity	-86.3
Io[Note3]	Config 1,2	dBm/ 9.36MHz	- 61.41	-61.41	-70.05	-58.06
Propagation condition			AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The UE shall start to transmit the PRACH to Cell 2 less than $D_{handover1}$ from the beginning of time period T3. The rate of correct handovers observed during repeated tests shall be at least 90%, where:

$D_{handover1} = T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

- $T_{RRC_procedure}$= 10 ms, is the RRC procedure delay specified in TS 38.331 [13] clause 12;
- T_{search} = 0 ms for known target cell, is the time required to search the target cell specified in 38.133 [6] clause 6.1.1.2.2;
- T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell specified in TS 38.133 [6] clause 6.1.1.2.2.
- $T_{processing}$ = 20 ms, is the time for UE processing specified in TS 38.133 [6] clause 6.1.1.2.2.
- T_{Δ} = 20 ms, is the time for fine time tracking and acquiring full timing information of the target cell specified in TS 38.133 [6] clause 6.1.1.2.2.
- T_{margin} = 2 ms, is the time for SSB post-processing specified in TS 38.133 [6] clause 6.1.1.2.2.

This gives a total of 72 ms.

During T3 UE is allowed to cause $T_{interrupt1}$ interruption to cell 1. $T_{interrupt1}$is defined in TS 38.133 [6] clause 6.1.3.2.2 Table 6.1.3.2.2-2. When UE is transmitting PRACH preamble to cell 2, interruption to cell 1 is allowed.

During T4 UE is allowed to cause $T_{interrupt2}$ interruption to cell 1. $T_{interrupt2}$ is defined in TS 38.133 [6] clause 6.1.3.2.2 Table 6.1.3.2.2-6.

UE shall finish cell 1 release in T4 and shall not send any CSI reports to cell 1 during T5.

6.3.1.11 NR SA FR1 Inter-band inter-frequency synchronous DAPS handover

6.3.1.11.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 inter-band inter-frequency DAPS handover requirements in synchronous scenario specified in TS 38.133 [6] clause 6.1.3.2.

6.3.1.11.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and support inter-band inter-frequency DAPS handover.

6.3.1.11.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.11.

6.3.1.11.4 Test description

6.3.1.11.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.1.11.4.1-1.

Table 6.3.1.11.4.1-1: NR SA FR1 Inter-band inter-frequency synchronous DAPS handover test configurations

Config	Description
6.3.1.11-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.1.11-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.1.11-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.1.11-4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.1.11-5	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.1.11-6	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.1.11-7	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
6.3.1.11-8	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
6.3.1.11-9	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.1.11.4.1-2

Table 6.3.1.11.4.1-2: Initial conditions for NR SA FR1 Inter-band inter-frequency synchronous DAPS handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.11.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.1.11.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.3.1.11.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.1.11.4.1-3: General test parameters for NR SA FR1 Inter-band inter-frequency synchronous DAPS handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	PCell on RF channel number 1
	Neighbouring cell		Cell 2	Neighbour cell on RF channel number 2
Final condition	Active cell		Cell 2	PCell on RF channel number 2
	Neighbouring cell		Cell 1	Neighbour cell on RF channel number 1
A3-Offset	Config 1,2,4,5,9	dB	-7 (Note 1)	
	Config 3,6	dB	-10 (Note 1)	
	Config 7,8	dB	-4	
Hysteresis		dB	0	
Time To Trigger		s	0	

Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells	µs	33	Synchronous cells
DRX		OFF	
Measurement gap pattern Id		#0	Gaps are configured before T2.
T1	s	5	
T2	s	<5	
T3	s	<0.5	
T4	ms	$10+T_{interrupt2}$	$T_{interrupt2}$ as defined in TS 38.133 [6] Table 6.1.3.2.2-7 for synchronous DAPS HO
T5	ms	100	
Note 1: Including test tolerance given in Annex F.1.3.2			

6.3.1.11.4.2 Test procedure

The test scenario comprises of two NR bands and one cell on each band, Cell 1 and Cell 2. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 6.3.1.11.4.1-3, 6.3.1.11.5-1 and 6.3.1.11.5-2 respectively.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to the Cell 1 and not aware of the Cell 2. During T1, the UE does not have any timing information of the Cell 2. Gap pattern ID gp0 is configured as specified in 38.133 [6] Table 9.1.2-1 before T2 in the test case.

From start of T2, the Cell 2 becomes detectable. During T2, the UE performs cell detection and measurements on the Cell 2 and shall send event report to the network. After receiving the event report A3, the network sends a RRC message implying DAPS handover command for target cell addition to the UE.

T3 starts from the instant when the last TTI containing DAPS handover command for target cell addition sent to the UE. During T3, UE shall be able to perform random access, DL reception or UL transmission in the Cell 2 while the DL scheduling and UL feedback in the Cell 1 shall be avoided. After successful RACH procedure on the Cell 2, UE is scheduled with PDSCH from Cell 1 and Cell 2 in alternative TTIs. In the end of T3 the network sends a RRC message implying DAPS handover command for source cell release to the UE. During T3, the handover delay $D_{handover1}$ for target cell addition need to be verified.

T4 starts from the instant when the last TTI containing DAPS handover command for source cell release sent to the UE. During T4, the UE shall accomplish the release actions within $D_{handover2}$

From start of T5, the UE shall stop sending periodical CSI report on Cell 1. And the test system shall observe the periodic reporting of CSI for cell 1 during T5.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 6.3.1.11.5-1 and Table 6.3.1.11.5-2. Propagation conditions are set according to Annex C clause C.2.2. T1 starts and the SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message to configure event A3 triggered measurement reporting on the inter-band inter-frequency carrier and periodical CSI reporting on Cell 1.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.1.11.5-1 and Table 6.3.1.11.5-2.

7. UE shall transmit a *MeasurementReport* message triggered by Event A3.

8. SS shall transmit an *RRCReconfiguration* with *reconfigurationWithSync* message which reconfiguring DRB as a DAPS radio bearer to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 6.3.1.11.5-1 and Table 6.3.1.11.5-2. T3 starts and the SS stops scheduling the UE to perform DL reception on Cell 1.

9. If the UE transmits PRACH preamble to Cell 2 within $D_{handover1}$ from the beginning of time period T3 then the number of successful tests is increased by one, continue to step 10. Otherwise, the number of failure tests is increased by one, go to step 17. where:

   - $D_{handover1}$ = 72 ms.

10. The UE transmits an *RRCReconfigurationComplete* message on Cell 2.

11. Upon receiving *RRCReconfigurationComplete* message sent by UE, the SS immediately starts scheduling UE to perform DL reception in Cell 1 and Cell 2 in an alternative manner, and monitoring corresponding ACK/NACK feedbacks sent by the UE.

12. Upon T3 expiring, the SS immediately transmit an *RRCReconfiguration* with *daps-SourceRelease-r16 = true* on Cell 2 to the UE. T4 starts.

13. When T4 expires, T5 starts.

15. If

    g) The UE can report ACK/NACK from the first DL reception scheduled on Cell 2 after the beginning of time period T5,

    and

    h) The UE doesn't send periodical CSI report on Cell 1during entire time period T5.

    then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

16. After T5 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

17. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Cell 1 is the active cell.

18. Repeat steps 2-17 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.1.11.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.3.1.11.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 6.3.1.11.4.3-3	
nonCriticalExtension SEQUENCE {			
masterCellGroup SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 6.3.1.11.4.3-2	
}			
}			
}			
}			
}			

Table 6.3.1.11.4.3-2: ServingCellConfig (Table 6.3.1.11.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM Specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 6.3.1.11.4.3-3: MeasConfig (Table 6.3.1.11.4.3-1)

Derivation path: Table H.3.1-2 with condition INTER-FREQ			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfig[1] CHOICE {			
reportConfigNR	ReportConfigNR(-7) specified in Table H.3.1-4	Acutal value of a3-Offset is -7 dB	6.3.1.11-1, 6.3.1.11-2, 6.3.1.11-4, 6.3.1.11-5, 6.3.1.11-9.
	ReportConfigNR(-10) specified in Table H.3.1-4	Acutal value of a3-Offset is -10 dB	6.3.1.11-3, 6.3.1.11-6
	ReportConfigNR(-4) specified in Table H.3.1-4	Acutal value of a3-Offset is -4 dB	6.3.1.11-7, 6.3.1.11-8
}			
}			
}			

Table 6.3.1.11.4.3-4: MeasurementReport (Step 7)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-5A			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasurementReport ::= SEQUENCE {			
criticalExtensions CHOICE {			
measurementReport SEQUENCE {			
measResults	MeasResults specified in Table H.3.1-7 with condition INTER-FREQ		
}			
}			
}			

Table 6.3.1.11.4.3-5: RRCReconfiguration (Step 8)

Derivation Path: TS 38.508-1 [4], Table 4.8.1-1A with Condition RBConfig_NoKeyChange			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
radioBearerConfig	RadioBearerConfig	Table 6.3.1.11.4.3-6	
nonCriticalExtension SEQUENCE{			
masterCellGroup	CellGroupConfig	Table 6.3.1.11.4.3-7	
}			
}			
}			

}			

Table 6.3.1.11.4.3-6: RadioBearerConfig (Table 6.3.1.11.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-132 with condition DRB1			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF DRB-ToAddMod {	1 entry		
DRB-ToAddMod[1] SEQUENCE {		entry 1	
drb-Identity	DRB-Identity using condition DRBn	DRB #n is a DRB established before DAPS HO. Actual value of n is left to TE implementation	
daps-Config-r16	true		
}			
}			
securityConfig	Not present		
}			

Table 6.3.1.11.4.3-7: CellGroupConfig (Table 6.3.1.11.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition PCell_change			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
rlc-BearerToAddModList	Not present		
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			
spCellConfigCommon SEQUENCE {			
physCellId	PhysCellId for Cell 2		
}			
}			
}			
}			

Table 6.3.1.11.4.3-8: RRCReconfiguration (Step 12)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition DAPS_HO_ReleaseSource

6.3.1.11.5 Test requirements

Table 6.3.1.11.5-1, Table 6.3.1.11.5-2 defines the primary level settings including test tolerances for all tests.

Table 6.3.1.11.5-1: Cell specific test parameters for NR SA FR1 Inter-band inter-frequency synchronous DAPS handover (Cell 1)

Parameter		**Unit**	**Cell 1**	
			T1	**T2 – T5**
NR RF Channel Number			1	
Duplex mode	Config 1,4,7		FDD	
	Config 2,3,5,6,8,9		TDD	
TDD configuration	Config 1,4,7		Not Applicable	
	Config 2,5,8		TDDConf.1.1	
	Config 3,6,9		TDDConf.2.1	
$BW_{channel}$	Config 1,4,7	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5,8		10: $N_{RB,c}$ = 52	
	Config 3,6,9		40: $N_{RB,c}$ = 106	
BWP BW	Config 1,4,7	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5,8		10: $N_{RB,c}$ = 52	

Parameter		Unit	Cell 1	
			T1	T2 – T5
	Config 3,6,9		40: $N_{RB,c}$ = 106	
TRS configuration	Config 1,4,7		TRS.1.1 FDD	
	Config 2,5,8		TRS.1.1 TDD	
	Config 3,6,9		TRS.1.2 TDD	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4,7		SR.1.1 FDD	
	Config 2,5,8		SR.1.1 TDD	
	Config 3,6,9		SR.2.1 TDD	
CORESET Reference Channel	Config 1,4,7		CR.1.1 FDD	
	Config 2,5,8		CR.1.1 TDD	
	Config 3,6,9		CR.2.1 TDD	
OCNG Patterns			OP.1	
CSI-RS configuration for CSI reporting	Config 1,4,7		CSI-RS.1.1 FDD	
	Config 2,5,8		CSI-RS.1.1 TDD	
	Config 3,6,9		CSI-RS.2.1 TDD	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5,7,8	slot	5	
	Config 3,6,9		10	
CSI reporting offset	Config 1,2,4,5,7,8	slot	3	
	Config 3,6,9		5	
SMTC Configuration			SMTC.1	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6,9		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6,9		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-98	-98
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	-98
	Config 3,6,9		-95	-95
$\hat{E}_s / I_{ot}$		dB	4	4
$\hat{E}_s / N_{oc}$		dB	4	4
SSB_RP	Config 1,2,4,5,7,8	dBm/SCS	-94	-94
	Config 3,6,9	dBm/SCS	-91	-91
Io Note3	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6,9	dBm/ 38.16MHz	-58.49	-58.49
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.3.1.11.5-2: Cell specific test parameters for NR SA FR1 Inter-band inter-frequency synchronous DAPS handover (Cell 2)

Parameter		Unit	Cell 2	
			T1	T2 - T5
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		FDD	
	Config 4,5,6,7,8,9		TDD	
TDD configuration	Config 1,2,3		Not Applicable	
	Config 4,5,6		TDDConf.1.1	
	Config 7,8,9		TDDConf.2.1	
$BW_{channel}$	Config 1,2,3	MHz	10: $N_{RB,c}$ = 52	
	Config 4,5,6		10: $N_{RB,c}$ = 52	
	Config 7,8,9		40: $N_{RB,c}$ = 106	
BWP BW	Config 1,2,3	MHz	10: $N_{RB,c}$ = 52	
	Config 4,5,6		10: $N_{RB,c}$ = 52	
	Config 7,8,9		40: $N_{RB,c}$ = 106	
TRS configuration	Config 1,2,3		TRS.1.1 FDD	
	Config 4,5,6		TRS.1.1 TDD	
	Config 7,8,9		TRS.1.2 TDD	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR.1.1 FDD	
	Config 4,5,6		SR.1.1 TDD	
	Config 7,8,9		SR2.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR.1.1 FDD	
	Config 4,5,6		CR.1.1 TDD	
	Config 7,8,9		CR2.1 TDD	
OCNG Patterns			OCNG pattern 1	
CSI-RS configuration for CSI reporting	Config 1,4,7		CSI-RS.1.1 FDD	
	Config 2,5,8		CSI-RS.1.1 TDD	
	Config 3,6,9		CSI-RS.2.1 TDD	
SMTC Configuration			SMTC pattern 1	
SSB Configuration	Config 1,2,3,4,5,6		SSB.1 FR1	
	Config 7,8,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-98	-98
N_{oc} Note2	Config 1,2,3,4,5,6	dBm/SCS	-98	-98
	Config 7,8,9		-95	-95
$\hat{E}_s / I_{ot}$		dB	-Infinity	4
$\hat{E}_s / N_{oc}$		dB	-Infinity	4
SSB_RP	Config 1,2,3,4,5,6	dBm/SCS	-Infinity	-94
	Config 7,8,9	dBm/SCS	-Infinity	-91
Io Note3	Config 1,2,3,4,5,6	dBm/ 9.36MHz	-70.05	-64.59
	Config 7,8,9	dBm/	-63.94	-58.49

Parameter		Unit	Cell 2	
			T1	T2 - T5
		38.16MHz		
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

The UE shall start to transmit the PRACH to Cell 2 less than $D_{handover1}$ from the beginning of time period T3. The rate of correct handovers observed during repeated tests shall be at least 90%, where:

$D_{handover1} = T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

- $T_{RRC_procedure}$= 10 ms, is the RRC procedure delay specified in TS 38.331 [13] clause 12;
- T_{search} = 0 ms for known target cell, is the time required to search the target cell specified in 38.133 [6] clause 6.1.1.2.2;
- T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell specified in TS 38.133 [6] clause 6.1.1.2.2.
- $T_{processing}$ = 20 ms, is the time for UE processing specified in TS 38.133 [6] clause 6.1.1.2.2.
- T_{Δ} = 20 ms, is the time for fine time tracking and acquiring full timing information of the target cell specified in TS 38.133 [6] clause 6.1.1.2.2.
- T_{margin} = 2 ms, is the time for SSB post-processing specified in TS 38.133 [6] clause 6.1.1.2.2.

This gives a total of 72 ms.

The UE shall complete to release Cell 1 less than $D_{handover2}$ from the beginning of time period T4. During $D_{handover2}$, the interruption on Cell 2 shall not exceed $T_{interrupt2}$ as defined in TS 38.133 [6] Table 6.1.3.2.2-7 for synchronous DAPS HO.

The handover delay $D_{handover2}$ can be expressed as: $T_{RRC_procedure} + T_{interrupt2}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [13].

6.3.1.12 NR SA FR1 Inter-band inter-frequency asynchronous DAPS handover

6.3.1.12.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 inter-band inter-frequency DAPS handover requirements in asynchronous scenario specified in TS 38.133 [6] clause 6.1.3.2.

6.3.1.12.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and support inter-band inter-frequency DAPS handover.

6.3.1.12.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.12.

6.3.1.12.4 Test description

6.3.1.12.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.1.12.4.1-1.

Table 6.3.1.12.4.1-1: NR SA FR1 Inter-band inter-frequency asynchronous DAPS handover test configurations

Config	Description
6.3.1.12-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.1.12-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.1.12-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.1.12-4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.1.12-5	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.1.12-6	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.1.12-7	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
6.3.1.12-8	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
6.3.1.12-9	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.1.12.4.1-2

Table 6.3.1.12.4.1-2: Initial conditions for NR SA FR1 Inter-band inter-frequency asynchronous DAPS handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.12.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.1.12.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.3.1.12.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.1.12.4.1-3: General test parameters for NR SA FR1 Inter-band inter-frequency asynchronous DAPS handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset	Config 1,2,4,5,9	dB	-7(Note 1)	
	Config 3,6	dB	-10(Note 1)	
	Config 7,8	dB	-4	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.

Time offset between cells	Config 1,2,4,5	ms	0.5	Asynchronous cells
	Config3,6,7,8,9	ms	0.25	
DRX			OFF	
Measurement gap pattern Id			#0	Gaps are configured before T2.
T1		s	5	
T2		s	<5	
T3		s	<0.5	
T4		ms	$10+T_{interrupt2}$	$T_{interrupt2}$ as defined in TS 38.133 [6] Table 6.1.3.2.2-7 for asynchronous DAPS HO.
T5		ms	100	
Note 1: Including test tolerance given in Annex F.1.3.2				

6.3.1.12.4.2 Test procedure

The test scenario comprises of two NR bands and one cell on each band, Cell 1 and Cell 2. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 6.3.1.12.4.1-3, 6.3.1.12.5-1 and 6.3.1.12.5-2 respectively.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to the Cell 1 and not aware of the Cell 2. During T1, the UE does not have any timing information of the Cell 2. Gap pattern ID gp0 is configured as specified in 38.133 [6] Table 9.1.2-1 before T2 in the test case.

From start of T2, the Cell 2 becomes detectable. During T2, the UE performs cell detection and measurements on the Cell 2 and shall send event report to the network. After receiving the event report A3, the network sends a RRC message implying DAPS handover command for target cell addition to the UE.

T3 starts from the instant when the last TTI containing DAPS handover command for target cell addition sent to the UE. During T3, UE shall be able to perform random access, DL reception or UL transmission in the Cell 2 while the DL scheduling and UL feedback in the Cell 1 shall be avoided. After successful RACH procedure on the Cell 2, UE is scheduled with PDSCH from Cell 1 and Cell 2 in alternative TTIs. In the end of T3 the network sends a RRC message implying DAPS handover command for source cell release to the UE. During T3, the handover delay $D_{handover1}$ for target cell addition need to be verified.

T4 starts from the instant when the last TTI containing DAPS handover command for source cell release sent to the UE. During T4, the UE shall accomplish the release actions within $D_{handover2}$

From start of T5, the UE shall stop sending periodical CSI report on Cell 1. And the test system shall observe the periodic reporting of CSI for cell 1 during T5.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 6.3.1.12.5-1 and Table 6.3.1.12.5-2. Propagation conditions are set according to Annex C clause C.2.2. T1 starts and the SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message to configure event A3 triggered measurement reporting on the inter-band inter-frequency carrier and periodical CSI reporting on Cell 1.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.1.12.5-1 and Table 6.3.1.12.5-2.

7. UE shall transmit a *MeasurementReport* message triggered by Event A3.

8. SS shall transmit an *RRCReconfiguration* with *reconfigurationWithSync* message which reconfiguring DRB as a DAPS radio bearer to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 6.3.1.12.5-1 and Table 6.3.1.12.5-2. T3 starts and the SS stops scheduling the UE to perform DL reception on Cell 1.

9. If the UE transmits PRACH preamble to Cell 2 within $D_{handover1}$ from the beginning of time period T3 then the number of successful tests is increased by one, continue to step 10. Otherwise, the number of failure tests is increased by one, go to step 17. where:

   - $D_{handover1}$ = 72 ms.

10. The UE transmits an *RRCReconfigurationComplete* message on Cell 2.

11. Upon receiving *RRCReconfigurationComplete* message sent by UE, the SS immediately starts scheduling UE to perform DL reception in Cell 1 and Cell 2 in an alternative manner, and monitoring corresponding ACK/NACK feedbacks sent by the UE.

12. Upon T3 expiring, the SS immediately transmit an *RRCReconfiguration* with *daps-SourceRelease-r16 = true* on Cell 2 to the UE. T4 starts.

13. When T4 expires, T5 starts.

15. If

    i) The UE can report ACK/NACK from the first DL reception scheduled on Cell 2 after the beginning of time period T5,

    and

    j) The UE doesn't send periodical CSI report on Cell 1during entire time period T5.

    then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

16. After T5 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

17. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Cell 1 is the active cell.

18. Repeat steps 2-17 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.1.12.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.3.1.12.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 6.3.1.12.4.3-3	
nonCriticalExtension SEQUENCE {			
masterCellGroup SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 6.3.1.12.4.3-2	
}			
}			
}			
}			
}			

Table 6.3.1.12.4.3-2: ServingCellConfig (Table 6.3.1.12.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM Specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 6.3.1.12.4.3-3: MeasConfig (Table 6.3.1.12.4.3-1)

Derivation path: Table H.3.1-2 with condition INTER-FREQ			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfig[1] CHOICE {			
reportConfigNR	ReportConfigNR(-7) specified in Table H.3.1-4	Acutal value of a3-Offset is -7 dB	6.3.1.11-1, 6.3.1.11-2, 6.3.1.11-4, 6.3.1.11-5, 6.3.1.11-9.
	ReportConfigNR(-10) specified in Table H.3.1-4	Acutal value of a3-Offset is -10 dB	6.3.1.11-3, 6.3.1.11-6
	ReportConfigNR(-4) specified in Table H.3.1-4	Acutal value of a3-Offset is -4 dB	6.3.1.11-7, 6.3.1.11-8
}			
}			
}			

Table 6.3.1.12.4.3-4: MeasurementReport (Step 7)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-5A			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasurementReport ::= SEQUENCE {			
criticalExtensions CHOICE {			
measurementReport SEQUENCE {			
measResults	MeasResults specified in Table H.3.1-7 with condition INTER-FREQ		
}			
}			
}			

Table 6.3.1.12.4.3-5: RRCReconfiguration (Step 8)

Derivation Path: TS 38.508-1 [4], Table 4.8.1-1A with Condition RBConfig_NoKeyChange			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
radioBearerConfig	RadioBearerConfig	Table 6.3.1.12.4.3-6	
nonCriticalExtension SEQUENCE{			
masterCellGroup	CellGroupConfig	Table 6.3.1.12.4.3-7	
}			
}			
}			

}			

Table 6.3.1.12.4.3-6: RadioBearerConfig (Table 6.3.1.12.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-132 with condition DRB1			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF DRB-ToAddMod {	1 entry		
DRB-ToAddMod[1] SEQUENCE {		entry 1	
drb-Identity	DRB-Identity using condition DRBn	DRB #n is a DRB established before DAPS HO. Actual value of n is left to TE implementation	
daps-Config-r16	true		
}			
}			
securityConfig	Not present		
}			

Table 6.3.1.12.4.3-7: CellGroupConfig (Table 6.3.1.12.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition PCell_change			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
rlc-BearerToAddModList	Not present		
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			
spCellConfigCommon SEQUENCE {			
physCellId	PhysCellId for Cell 2		
}			
}			
}			
}			

Table 6.3.1.12.4.3-8: RRCReconfiguration (Step 12)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition DAPS_HO_ReleaseSource

6.3.1.12.5 Test requirements

Table 6.3.1.12.5-1, Table 6.3.1.12.5-2 defines the primary level settings including test tolerances for all tests.

Table 6.3.1.12.5-1: Cell specific test parameters for NR SA FR1 Inter-band inter-frequency asynchronous DAPS handover (Cell 1)

Parameter		**Unit**	**Cell 1**	
			T1	**T2 – T5**
NR RF Channel Number			1	
Duplex mode	Config 1,4,7		FDD	
	Config 2,3,5,6,8,9		TDD	
TDD configuration	Config 1,4,7		Not Applicable	
	Config 2,5,8		TDDConf.1.1	
	Config 3,6,9		TDDConf.2.1	
$BW_{channel}$	Config 1,4,7	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5,8		10: $N_{RB,c}$ = 52	
	Config 3,6,9		40: $N_{RB,c}$ = 106	
BWP BW	Config 1,4,7	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5,8		10: $N_{RB,c}$ = 52	

Parameter		Unit	Cell 1	
			T1	T2 – T5
	Config 3,6,9		40: $N_{RB,c}$ = 106	
TRS configuration	Config 1,4,7		TRS.1.1 FDD	
	Config 2,5,8		TRS.1.1 TDD	
	Config 3,6,9		TRS.1.2 TDD	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4,7		SR.1.1 FDD	
	Config 2,5,8		SR.1.1 TDD	
	Config 3,6,9		SR.2.1 TDD	
CORESET Reference Channel	Config 1,4,7		CR.1.1 FDD	
	Config 2,5,8		CR.1.1 TDD	
	Config 3,6,9		CR.2.1 TDD	
OCNG Patterns			OP.1	
CSI-RS configuration for CSI reporting	Config 1,4,7		CSI-RS.1.1 FDD	
	Config 2,5,8		CSI-RS.1.1 TDD	
	Config 3,6,9		CSI-RS.2.1 TDD	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5,7,8	slot	5	
	Config 3,6,9		10	
CSI reporting offset	Config 1,2,4,5,7,8	slot	3	
	Config 3,6,9		5	
SMTC Configuration			SMTC.1	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6,9		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6,9		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-98	-98
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	-98
	Config 3,6,9		-95	-95
$\hat{E}_s / I_{ot}$		dB	4	4
$\hat{E}_s / N_{oc}$		dB	4	4
SSB_RP	Config 1,2,4,5,7,8	dBm/SCS	-94	-94
	Config 3,6,9	dBm/SCS	-91	-91
Io Note3	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6,9	dBm/ 38.16MHz	-58.49	-58.49
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.3.1.12.5-2: Cell specific test parameters for NR SA FR1 Inter-band inter-frequency asynchronous DAPS handover (Cell 2)

Parameter		Unit	Cell 2	
			T1	T2 - T5
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		FDD	
	Config 4,5,6,7,8,9		TDD	
TDD configuration	Config 1,2,3		Not Applicable	
	Config 4,5,6		TDDConf.1.1	
	Config 7,8,9		TDDConf.2.1	
$BW_{channel}$	Config 1,2,3	MHz	10: $N_{RB,c}$ = 52	
	Config 4,5,6		10: $N_{RB,c}$ = 52	
	Config 7,8,9		40: $N_{RB,c}$ = 106	
BWP BW	Config 1,2,3	MHz	10: $N_{RB,c}$ = 52	
	Config 4,5,6		10: $N_{RB,c}$ = 52	
	Config 7,8,9		40: $N_{RB,c}$ = 106	
TRS configuration	Config 1,2,3		TRS.1.1 FDD	
	Config 4,5,6		TRS.1.1 TDD	
	Config 7,8,9		TRS.1.2 TDD	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR.1.1 FDD	
	Config 4,5,6		SR.1.1 TDD	
	Config 7,8,9		SR2.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR.1.1 FDD	
	Config 4,5,6		CR.1.1 TDD	
	Config 7,8,9		CR2.1 TDD	
OCNG Patterns			OCNG pattern 1	
CSI-RS configuration for CSI reporting	Config 1,4,7		CSI-RS.1.1 FDD	
	Config 2,5,8		CSI-RS.1.1 TDD	
	Config 3,6,9		CSI-RS.2.1 TDD	
SMTC Configuration			SMTC pattern 1	
SSB Configuration	Config 1,2,3,4,5,6		SSB.1 FR1	
	Config 7,8,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-98	-98
N_{oc} Note2	Config 1,2,3,4,5,6	dBm/SCS	-98	-98
	Config 7,8,9		-95	-95
$\hat{E}_s / I_{ot}$		dB	-Infinity	4
$\hat{E}_s / N_{oc}$		dB	-Infinity	4
SSB_RP	Config 1,2,3,4,5,6	dBm/SCS	-Infinity	-94
	Config 7,8,9	dBm/SCS	-Infinity	-91
Io Note3	Config 1,2,3,4,5,6	dBm/ 9.36MHz	-70.05	-64.59
	Config 7,8,9	dBm/ 38.16MHz	-63.94	-58.49
Propagation condition		-	AWGN	

Parameter	Unit	Cell 2	
		T1	T2 - T5
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

The UE shall start to transmit the PRACH to Cell 2 less than $D_{handover1}$ from the beginning of time period T3. The rate of correct handovers observed during repeated tests shall be at least 90%, where:

$D_{handover1} = T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

- $T_{RRC_procedure}$= 10 ms, is the RRC procedure delay specified in TS 38.331 [13] clause 12;
- T_{search} = 0 ms for known target cell, is the time required to search the target cell specified in 38.133 [6] clause 6.1.1.2.2.
- T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell specified in TS 38.133 [6] clause 6.1.1.2.2.
- $T_{processing}$ = 20 ms, is the time for UE processing specified in TS 38.133 [6] clause 6.1.1.2.2.
- T_{Δ} = 20 ms, is the time for fine time tracking and acquiring full timing information of the target cell specified in TS 38.133 [6] clause 6.1.1.2.2.
- T_{margin} = 2 ms, is the time for SSB post-processing specified in TS 38.133 [6] clause 6.1.1.2.2.

This gives a total of 72 ms.

The UE shall complete to release Cell 1 less than $D_{handover2}$ from the beginning of time period T4. During $D_{handover2}$, the interruption on Cell 2 shall not exceed $T_{interrupt2}$ as defined in TS 38.133 [6] Table 6.1.3.2.2-6 for asynchronous DAPS HO.

The handover delay $D_{handover2}$ can be expressed as: $T_{RRC_procedure} + T_{interrupt2}$, where:

$T_{RRC_procedure}$ = 10 ms and is specified in clause 12 in TS 38.331 [13].

6.3.1.13 to 6.3.1.17

6.3.1.18 NR SA FR1 handover with unknown target cell operating with 12 PRB SSB bandwidth

6.3.1.18.1 Test purpose

To verify the UEs ability to perform the NR FR1-NR FR1 intra-frequency handover requirements for unknown target cell operating with 12 PRB SSB bandwidth as specified in TS 38.133[6] clause 6.1.1.2.

6.3.1.18.2 Test applicability

This test applies to all types of NR UE from Release 18 onwards supporting in less than 5 MHz bandwidth.

6.3.1.18.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.1.18.

6.3.1.18.4 Test description

6.3.1.18.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.1.18.4.1-1.

Table 6.3.1.18.4.1-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
6.3.1.18-1	Source cell: NR 15 kHz SSB SCS, 3 MHz bandwidth with 15PRB CBW, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 3 MHz bandwidth with 15PRB CBW, FDD duplex mode
6.3.1.18-2	Source cell: NR 15 kHz SSB SCS, 3 MHz bandwidth with 12PRB CBW, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 3 MHz bandwidth with 12PRB CBW, FDD duplex mode
Note1: The UE is only required to be tested in one of the supported test configurations Note2: Configuration 2 is only applied for the testing on band n100	

Configure the test equipment and the DUT according to the parameters in Table 6.3.1.18.4.1-2

Table 6.3.1.18.4.1-2: Initial conditions for NR SA FR1 handover with unknown target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.1.18.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.1.18.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. General test parameters as specified in Table 6.3.1.18.4.1-3 below:

Table 6.3.1.18.4.1-3: General test parameters Intra-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	unknown target cell operating with 12 PRB SSB bandwidth
Final condition	Active cell		Cell 2	unknown target cell operating with 12 PRB SSB bandwidth

6.3.1.18.4.2 Test procedure

Same as 6.3.1.2.4.2

6.3.1.18.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.3.1.18.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.2-2 with Condition RBConfig_KeyChange

6.3.1.18.5 Test requirements

Cell specific test parameters as specified in Table 6.3.1.2.5-1 with config 1 apply except those specified in Table 6.3.1.18.5-1.

Table 6.3.1.18.5-1: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
$BW_{channel}$	Config 1	MHz	3: $N_{RB,c}$ = 15			
	Config 2		3: $N_{RB,c}$ = 12			
BWP BW	Config 1	MHz	3: $N_{RB,c}$ = 15			
	Config 2		3: $N_{RB,c}$ = 12			
PDSCH Reference measurement channel	Config 1		SR.1.2 FDD			
	Config 2		SR.1.2 FDD			
CORESET Reference Channel	Config 1		CR.1.3 FDD			
	Config 2		CR.1.2 FDD			
SSB Configuration	Config 1,2		SSB.13 FR1			
Io[Note1]	Config 1	dBm/ 2.7MHz	-66.81	-64.11	-66.81	-64.11
	Config 2	dBm/ 2.16MHz	-67.78	-65.07	-67.78	-65.07
Propagation condition		-	AWGN		AWGN	
Note 1: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The UE shall start to transmit the PRACH to Cell 2 less than 132 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [13].

$T_{interrupt}$ = 122 ms in the test. $T_{interrupt}$ is defined in TS 38.133 [6] clause 6.1.1.2.2.

This gives a total of 132 ms.

6.3.2 RRC connection mobility control

6.3.2.1 RRC re-establishment

6.3.2.1.0 Minimum conformance requirements

6.3.2.1.0.1 Minimum conformance requirements for FR1 RRC re-establishment

In RRC_CONNECTED state the UE shall be capable of sending *RRCReestablishmentRequest* message within $T_{re\text{-}establish_delay}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re\text{-}establish_delay}$) shall be less than:

$$T_{re-establish_delay} = T_{UE_re-establish_delay} + T_{UL_grant}$$

T_{UL_grant}: It is the time required to acquire and process uplink grant from the target PCell. The uplink grant is required to transmit *RRCReestablishmentRequest* message.

The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in clause 5.3.7 in TS 38.331 [2] is detected by the UE and when the UE sends PRACH to the target PCell. The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) requirement shall be less than:

$$T_{UE_re-establish_delay} = 50 + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

The intra-frequency target NR cell shall be considered detectable when for each relevant SSB can satisfy that:

- SS-RSRP related side conditions given in Section 10.1.2 and 10.1.3 are fulfilled for a corresponding NR Band for FR1 and FR2, respectively,

- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding NR Band are fullfilled.

The inter-frequency target NR cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in Section 10.1.4 and 10.1.5 are fulfilled for a corresponding NR Band for FR1 and FR2, respectively,

- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding NR Band are fullfilled.

$T_{identify_intra_NR}$: It is the time to identify the target intra-frequency NR cell and it depends on whether the target NR cell is known cell or unknown cell and on the frequency range (FR) of the target NR cell. If the UE is not configured with intra-frequency NR carrier for RRC re-establishment then $T_{identify_intra_NR}$=0; otherwise $T_{identify_intra_NR}$ shall not exceed the values defined in table 6.3.2.1.0.1-1.

$T_{identify_inter_NR,i}$: It is the time to identify the target inter-frequency NR cell on inter-frequency carrier *i* configured for RRC re-establishment and it depends on whether the target NR cell is known cell or unknown cell and on the frequency range (FR) of the target NR cell. $T_{identify_inter_NR,i}$ shall not exceed the values defined in table 6.3.2.1.0.1-2.

T_{SMTC}: It is the periodicity of the SMTC occasion configured for the intra-frequency carrier. If the UE has been provided with higher layer in TS 38.331 [2] signalling of *smtc2*, T_{smtc} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier *i*. If it is not configured, the UE may assume that the target SSB periodicity is no larger than 20 ms.

$T_{SI\text{-}NR}$ = It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for the target NR cell.

$T_{PRACH:}$ It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{PRACH} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

N_{freq}: It is the total number of NR frequencies to be monitored for RRC re-establishment; N_{freq} = 1 if the target intra-frequency NR cell is known, else N_{freq} = 2 and $T_{identify_intra_NR}$ = 0 if the target inter-frequency NR cell is known.

There is no requirement if the target cell does not contain the UE context.

In the requirement defined in the below tables, the target FR1 cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown.

Table 6.3.2.1.0.1-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell

Serving cell SSB Ês/Iot (dB)	Frequency range (FR) of target NR cell	$T_{identify_intra_NR}$ (ms)	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 5 x T_{SMTC})	MAX (800 ms, 10 x T_{SMTC})
≥ -8	FR2	N/A	MAX (1000 ms, 80 x T_{SMTC}))
< -8	FR1	N/A	800[Note1]
< -8	FR2	N/A	3520[Note1]
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when T_{SMTC} > 20 ms and serving cell SSB Ês/Iot < -8 dB.			

Table 6.3.2.1.0.1-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell

Serving cell SSB Ês/Iot (dB)	Frequency range (FR) of target NR cell	$T_{identify_inter_NR,\ i}$ (ms)	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 6 x $T_{SMTC,\ i}$)	MAX (800 ms, 13 x $T_{SMTC,\ i}$)
≥ -8	FR2	N/A	MAX (1000 ms, 104 x $T_{SMTC,\ i}$))
< -8	FR1	N/A	800[Note1]
< -8	FR2	N/A	4000[Note1]
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{SMTC,i}$ > 20 ms and serving cell SSB Ês/Iot < -8 dB.			

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.1.2.1.

6.3.2.1.1 NR SA FR1 RRC re-establishment

6.3.2.1.1.1 Test purpose

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits.

6.3.2.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.3.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.2.1.1.

6.3.2.1.1.4 Test description

6.3.2.1.1.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 6.3.2.1.1.4.1-1

Table 6.3.2.1.1.4.1-1: Supported test configurations

Configuration	Description
6.3.2.1.1-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.3.2.1.1-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.3.2.1.1-3	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 6.3.2.1.1.4.1-2

Table 6.3.2.1.1.4.1-2: Initial conditions for NR Intra-frequency RRC Re-establishment in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.3.2.1.1.4.1-3.
2. Message contents are defined in clause 6.3.2.1.1.4.3.

There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.3.2.1.1.4.1-3: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	

Final condition	Active cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
N310		-	1, 2, 3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3	0	Radio link failure timer
T311		ms	1, 2, 3	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	OFF	
PRACH configuration			1, 2, 3	PRACH.1 FR1	Table A.7.1-1
T1		s	1, 2, 3	5	
T2		ms	1, 2, 3	240	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1, 2, 3	2	

6.3.2.1.1.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.

2. Set the parameters according to T1 in Table 6.3.2.1.1.5-1. T1 starts.

3. SS shall transmit an RRCReconfiguration message.

4. The UE shall transmit RRCReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.2.1.1.5-1. T2 starts

6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 6.3.2.1.1.5-1. T3 starts

7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within 1840 ms (= 220ms + 1.6 s) from the beginning of time period T2, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

9. Repeat step 2-8 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

6.3.2.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3with the following exceptions:

Table 6.3.2.1.1.4.3-1: Common Exception messages intra-frequency RRC re-establishment

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Specific message contents exceptions for Test Configuration 6.3.2.1.1-1	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 6.3.2.1.1-2	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1 and synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 6.3.2.1.1-3	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1 and synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.3.2.1.1.4.3-2: *RLF-TimersAndConstants* for intra-frequency RRC re-establishment

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
t311	ms3000		
}			

Table 6.3.2.1.1.4.3-3: *MeasConfig* for intra-frequency RRC re-establishment

Derivation Path: TS 38.508-1 [14], Table 4.6.3-69			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
quantityConfig	Not present		
}			

6.3.2.1.1.5 Test requirement

Table 6.3.2.1.1.5-1 defines the primary level settings including test tolerances for NR Intra-frequency RRC Re-establishment in FR1 test case.

Table 6.3.2.1.1.5-1: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 FDD		
		3	SR.2.1 TDD			SR.2.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		1, 2, 3	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	1.54	-infinity	-infinity	-3.79	4	4
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/N_{oc}$	dB	1	7	-infinity	-infinity	4	4	4
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-91	-infinity	-infinity	-94	-94	-94
		2	-91	-infinity	-infinity	-94	-94	-94
		3	-88	-infinity	-infinity	-91	-91	-91
Io	dBm/9.36 MHz	1	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/9.36 MHz	2	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/38.16 MHz	3	-54.65	-58.50	-58.50	-54.65	-58.50	-58.50
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The RRC re-establishment delay is defined as the time from the the moment UE declares RLF, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell shall be less than 1.6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 1$

$T_{identify_intra_NR}$ = 200 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 1545 ms for RRC re-establishment delay, allow 1840ms (240 ms + 1.6 s) from the beginning of T2 in the test case.

6.3.2.1.2 NR SA FR1 - FR1 RRC re-establishment

6.3.2.1.2.1 Test purpose

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits.

6.3.2.1.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.3.2.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] A.6.3.2.1.2.

6.3.2.1.2.4 Test description

6.3.2.1.2.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 6.3.2.1.2.4.1-1

Table 6.3.2.1.2.4.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
6.3.2.1.2-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.3.2.1.2-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.3.2.1.2-3	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test requirement and the DUT according to the parameters in Table 6.3.2.1.2.4.1-2

Table 6.3.2.1.2.4.1-2: Initial conditions for NR Inter-frequency RRC Re-establishment in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.3.2.1.2.4.1-3.
2. Message contents are defined in clause 6.3.2.1.2.4.3.

There are two NR carriers and two cells specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.3.2.1.2.4.1-3: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Value	Comment

Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
Final condition	Active cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
N310		-	1, 2, 3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3	0	Radio link failure timer
T311		ms	1, 2, 3	5000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	OFF	
PRACH configuration			1, 2, 3	PRACH.1 FR1	Table A.7.1-1
T1		s	1, 2, 3	5	
T2		ms	1, 2, 3	240	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1, 2, 3	5	

6.3.2.1.2.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.

2. Set the parameters according to T1 in Table 6.3.2.1.2.5-1. T1 starts.

3. SS shall transmit an RRCReconfiguration message.

4. The UE shall transmit RRCReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.2.1.2.5-1. T2 starts

6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 6.3.2.1.2.5-1. T3 starts

7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within 3 s from the beginning of time period T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

9. Set cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

6.3.2.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3with the following exceptions:

Table 6.3.2.1.2.4.3-1: Common Exception messages inter-frequency RRC re-establishment

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Specific message contents exceptions for Test Configuration 6.3.2.1.2-1	Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 6.3.2.1.2-2	Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 6.3.2.1.2-3	Table H.3.1-3 with Condition INTER-FREQ MO, SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.3.2.1.2.4.3-2: *RLF-TimersAndConstants* for inter-frequency RRC re-establishment

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
t311	ms5000		
}			

Table 6.3.2.1.2.4.3-3: *MeasConfig* for inter-frequency RRC re-establishment

Derivation Path: TS 38.508-1 [14], Table 4.6.3-69			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
quantityConfig	Not present		
}			

6.3.2.1.2.5 Test requirement

Table 6.3.2.1.2.5-1 defines the primary level settings including test tolerances for NR Inter-frequency RRC Re-establishment in FR1 test case.

Table 6.3.2.1.2.5-1: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
RF Channel Number		1, 2, 3	1			2		
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		1, 2, 3	SSB			SSB		
$\hat{E}_s / I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-91
		2	-94	-infinity	-infinity	-infinity	-infinity	-91
		3	-91	-infinity	-infinity	-infinity	-infinity	-88
Io	dBm/9.36 MHz	1	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/9.36 MHz	2	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/38.16 MHz	3	-58.50	-63.94	-63.94	-63.94	-63.94	-56.15
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 2$

$T_{identify_intra_NR}$ = 800 ms

$T_{identify_inter_NR}$ = 800 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 2945 ms, allow 3 s in the test case.

6.3.2.1.3 NR SA FR1 RRC re-establishment without serving cell timing

6.3.2.1.3.1 Test purpose

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 without serving cell timing is within the specified limits and to verify the requirements in TS 38.133 [6] clause 6.2.1

6.3.2.1.3.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.3.2.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.2.1.3.

6.3.2.1.3.4 Test description

6.3.2.1.3.4.1 Initial conditions

The test shall be tested using any of the test configuration in Table 6.3.2.1.3.4.1-1

Table 6.3.2.1.3.4.1-1: Supported test configurations

Configuration	Description
6.3.2.1.3-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.3.2.1.3-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.3.2.1.3-3	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 6.3.2.1.3.4.1-2

Table 6.3.2.1.3.4.1-2: Initial conditions for NR SA FR1 RRC re-establishment without serving cell timing

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.3.2.1.3.4.1-3.
2. Message contents are defined in clause 6.3.2.1.3.4.3.
3. There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.3.2.1.3.4.1-3: General test parameters for NR SA FR1 RRC re-establishment without serving cell timing

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
Final condition	Active cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
N310		-	1, 2, 3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3	6000	Radio link failure timer configured by *RLF-TimersAndConstants*
T311		ms	1, 2, 3	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	OFF	
PRACH configuration			1, 2, 3	PRACH.1 FR1	
T1		s	1, 2, 3	5	
T2		s	1, 2, 3	6.24	Time for the UE to detect RLF (Summation of TEvaluate_out_SSB defined in clause 8.1 in TS 38.133 [6], T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133 [6])
T3		s	1, 2, 3	3	

6.3.2.1.3.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.

2. Set the parameters according to T1 in Table 6.3.2.1.3.5-1. T1 starts.

3. SS shall transmit an RRCReconfiguration message.

4. The UE shall transmit RRCReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.2.1.3.5-1. T2 starts

6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 6.3.2.1.3.5-1. T3 starts

7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within 2.2 s from the beginning of time period T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T3 expires, trigger UE handover back to Cell 1(if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

9. Set cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

6.3.2.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.3.2.1.3.4.3-1: Common Exception messages for NR SA FR1 RRC re-establishment without serving cell timing

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Specific message contents exceptions for Test Configuration 6.3.2.1.3-1	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 6.3.2.1.3-2	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1 and synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 6.3.2.1.3-3	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1 and synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.3.2.1.3.4.3-2: *RLF-TimersAndConstants for intra-frequency RRC re-establishment*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms6000		
t311	ms3000		
}			

Table 6.3.2.1.3.4.3-3: *MeasConfig* for intra-frequency RRC re-establishment

Derivation Path: TS 38.508-1 [14], Table 4.6.3-69			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
quantityConfig	Not present		
}			

6.3.2.1.3.5 Test requirement

Table 6.3.2.1.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 RRC re-establishment without serving cell timing test case.

Table 6.3.2.1.3.5-1: Cell specific test parameters for NR SA FR1 RRC re-establishment without serving cell timing

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1			OP.1		
TRS Configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-94
		2	-94	-infinity	-infinity	-infinity	-infinity	-94
		3	-91	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/9.36 MHz	1	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59
	dBm/9.36 MHz	2	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59
	dBm/38.16 MHz	3	-58.50	-63.94	-63.94	-63.94	-63.94	-58.50
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 2.2 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

N_{freq} = 1

$T_{identify_intra_NR}$ = 800 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [13] for the target intra-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 2145 ms, allow 2.2 s in the test case.

6.3.2.2 Random access

6.3.2.2.0 Minimum conformance requirements

6.3.2.2.0.1 Minimum conformance requirements for Contention based random access

The random access procedure is used when establishing the layer 1 communication between the UE and NG-RAN. The random access is as defined in TS 38.213 [8] clause 7.4 and the control of the RACH transmission is as defined in TS 38.321 [12] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 38.213 [8] clause 7.4 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in TS 38.101-1 [2] Table 6.3.4.2-1. The relative power applied to additional preambles shall have an accuracy as specified in TS 38.101-1 [2] Table 6.3.4.3-1.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in TS 38.321 [12] clause 5.1.4.

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2 in TS 38.321 [12].

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [12].

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2.

6.3.2.2.0.2 Minimum conformance requirements for Non-Contention based random access

The random access procedure is used when establishing the layer 1 communication between the UE and NG-RAN. The random access is as defined in TS 38.213 [8] clause 7.4 and the control of the RACH transmission is as defined in TS 38.321 [12] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 38.213 [8] clause 7.4 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in TS 38.101-1 [2] Table 6.3.4.2-1. The relative power applied to additional preambles shall have an accuracy as specified in TS 38.101-1 [2] Table 6.3.4.3-1.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in TS 38.321 [12] clause 5.1.4.

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs is configured, with the UE selected CSI-RS with CSI-RSRP above *cfra-csirs-DedicatedRACH-Threshold* amongst the associated CSI-RSs, UE shall have the capability to select the Random Access Preamble corresponding to the selected CSI-RS, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2.

Non-contention based random access procedure is not initialized for Other SI requested from UE or for beam failure recovery, so the requirements related to those features are omitted.

6.3.2.2.1 NR SA FR1 contention based random access

6.3.2.2.1.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits.

6.3.2.2.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.3.2.2.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.3.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clauses A.6.3.2.2.1.

6.3.2.2.1.4 Test description

6.3.2.2.1.4.1 Initial conditions

This test can be run in the configurations defined in Table 6.3.2.2.1.4.1-1.

Table 6.3.2.2.1.4.1-1: Contention based random access test in FR1 for NR standalone supported test configurations

Test Case ID	Test Config Index	Description
6.3.2.2.1-1	1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.3.2.2.1-2	2	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations		

Configure the test equipment and the DUT according to the parameters in Table 6.3.2.2.1.4.1-2.

Table 6.3.2.2.1.4.1-2: Initial conditions for Contention based random access test in FR1 for NR standalone

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. Message contents are defined in clause 6.3.2.2.1.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell). The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

6.3.2.2.1.4.2 Test procedure

The test consists of a single cell, configured as PCell in FR1. The System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity *NR* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 6.3.2.2.1.5-1.

3. The UE shall establish a connection setup with SS, the random access procedure within the connection setup is used in the test.

4. Test 1: Correct behaviour when transmitting Random Access Preamble

   4.1. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured rsrp-ThresholdSSB.

5. Test 2: Correct behaviour when receiving Random Access Response

   5.1. Repeat steps 1-3.

   5.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

   5.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

   5.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   5.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

   5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 6.3.2.2.1.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in 6.3.2.2.1.5.

6. Test 3: Correct behaviour when not receiving Random Access Response

   6.1. Repeat steps 1-3.

   6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

   6.3. As no Random Access Response was received within the RA Response window, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

   6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

   6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 6.3.2.2.1.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in 6.3.2.2.1.5.

7. Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission

   7.1. Repeat steps 1-3.

   7.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

   7.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

7.4. The System Simulator shall send PDCCH addressed to the Temporary C-RNTI after receiving the msg3.

7.5. The UE shall re-transmit the msg3.

7.6. The System Simulator shall check if UE re-transmit the msg3.

8. Test 5: Correct behaviour when receiving an unsuccessful UE Contention Resolution

8.1. Repeat steps 1-3.

8.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

8.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

8.4. The System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element not matching the CCCH SDU transmitted in msg3 uplink message.

8.5. As the UE Contention Resolution Identity included in the MAC control element did not match the CCCH SDU transmitted in the uplink message, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

8.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 6.3.2.2.1.5.

9. Test 6: Correct behaviour when receiving a successful UE Contention Resolution

9.1. Repeat steps 1-3.

9.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

9.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

9.4. The System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in msg3 uplink message.

9.5. As the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU, the Contention Resolution is successful and the UE shall send ACK.

10. Test 7: Correct behaviour when contention Resolution timer expires

10.1. Repeat steps 1-3.

10.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

10.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

10.4. The System Simulator shall not send a response.

10.5. As there was no response, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the Contention Resolution Timer expires and then after the backoff timer expires.

10.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 6.3.2.2.1.5.

6.3.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.3.2.2.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-115 with SSB-Index 0 Table 4.6.3-120 with SSB-Index 0

Table 6.3.2.2.1.4.3-1: *FrequencyInfoUL-SIB* for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-62			
Information Element	**Value/remark**	**Comment**	**Condition**
FrequencyInfoUL-SIB SEQUENCE {			
p-Max	23	23 dBm	
}			

Table 6.3.2.2.1.4.3-2: RACH-ConfigCommon for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n48		FR1
}			
groupBconfigured SEQUENCE {			
numberOfRA-PreamblesGroupA	48		
}			
ra-ContentionResolutionTimer	sf48		
rsrp-ThresholdSSB	RSRP_51		
prach-RootSequenceIndex CHOICE {			
0			
}			
msg1-SubcarrierSpacing	kHz 15		
	kHz 30		
}			

Table 6.3.2.2.1.4.3-3: RACH-ConfigGeneric for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	102		FR1
msg1-FDM	one		FR1
zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-120		
preambleTransMax	n6		
powerRampingStep	dB2		
ra-ResponseWindow	sl10		
}			

Table 6.3.2.2.1.4.3-4: *ServingCellConfigCommonSIB* for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-169			
Information Element	**Value/remark**	**Comment**	**Condition**

ServingCellConfigCommonSIB ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	-5		
}			

6.3.2.2.1.5 Test requirement

Table 6.3.2.2.1.5-1 defines the primary level settings for contention based random access test in FR1 for NR Standalone. Tables 6.3.2.2.1.5-2, 6.3.2.2.1.5-3 and 6.3.2.2.1.5-4 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances.

Table 6.3.2.2.1.5-1: General test parameters for contention based random access test in FR1 for NR Standalone

Parameter			Unit	Test-1	Comments
SSB Configuration		Config 1		SSB.1 FR1	As defined in A.3.1, except for number of SSBs per SS-burst and SS/PBCH block index as below
		Config 2		SSB.2 FR1	
Number of SSBs per SS-burst				2	Different from the definition in A.3.1
SS/PBCH block index				0,1	Different from the definition in A.3.1
Duplex Mode for Cell 1		Config 1		FDD	
		Config 2		TDD	
TDD Configuration		Config 2		TDDConf.2.1	
CSI-RS for tracking		Config 1		TRS.1.1 FDD	
		Config 2		TRS.1.2 TDD	
OCNG Pattern Note 1				OP.1	As defined in A.2.1
PDSCH parameters Note 4		Config 1		SR.1.1 FDD	As defined in A.1.1
		Config 2		SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD	
		Config 2		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD	
		Config 2		CCR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s/I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	
		Config 2		-101	
	$\hat{E}_s/N_{oc}$		dB	3	
	SS-RSRP	Config 1	dBm/15kHz	-95	
		Config 2		-98	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s/I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	
		Config 2		-101	
	$\hat{E}_s/N_{oc}$		dB	-17	
	SS-RSRP	Config 1	dBm/15kHz	-115	
		Config 2		-118	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-62.2/38.16MHz	

Parameter	Unit	Test-1	Comments
ss-PBCH-BlockPower	dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,f,c}$)	dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
PRACH Configuration		FR1 PRACH configuration 1	As defined in A. 7.1.
Propagation Condition	-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: Es/Iot, SS-RSRP and Io level have been derived from other parameters for information purpose. They are not settable parameters. Note 3: Void. Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.			

Test 1: Correct behaviour when transmitting Random Access Preamble

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.

Test 2: Correct behaviour when receiving Random Access Response

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.1.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 6.3.2.2.1.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.3.2.2.1.5-4.

Test 3: Correct behaviour when not receiving Random Access Response

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.1.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 6.3.2.2.1.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.3.2.2.1.5-4.

Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission

- The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

Test 5: Correct behaviour when receiving an incorrect message over Temporary C-RNTI

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires.
- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.1.5-2.
- The transmit timing of the PRACH transmission shall be within the accuracy specified in Table 6.3.2.2.1.5-4.

Test 6: Correct behaviour when receiving a correct message over Temporary C-RNTI

- The UE shall send ACK if the contention resolution is successful.

Test 7: Correct behaviour when contention resolution timer expires

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if the contention resolution timer expires.
- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.1.5-2.
- The transmit timing of the PRACH transmission shall be within the accuracy specified in Table 6.3.2.2.1.5-4.

Table 6.3.2.2.1.5-2 Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 6.3.2.2.1.5-3 Relative power tolerance Test requirements

Power step ΔP (Up or down) (dB)	PRACH (dB)
2 ≤ ΔP < 3	± 3.2

Table 6.3.2.2.1.5-4: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	15	15	880*T_c
	30	30	624*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

6.3.2.2.2 NR SA FR1 non-contention based random access

6.3.2.2.2.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits.

6.3.2.2.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards. Additionally Test 2 is applicable to UE that supports CSI-RS based Random Access Preamble which requires UE to support csi-RS-CFRA-ForHO.

6.3.2.2.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.3.2.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clauses A.6.3.2.2.2.

6.3.2.2.2.4 Test description

6.3.2.2.2.4.1 Initial conditions

This test can be run in the configurations defined in Table 6.3.2.2.2.4.1-1.

Table 6.3.2.2.2.4.1-1: Non-Contention based random access test in FR1 for NR standalone supported test configurations

Test Case ID	Test Config Index	Description
6.3.2.2.2-1	1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.3.2.2.2-2	2	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations		

Configure the test equipment and the DUT according to the parameters in Table 6.3.2.2.2.4.1-2.

Table 6.3.2.2.2.4.1-2: Initial conditions for Non-Contention based random access test in FR1 for NR standalone

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] subclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part	

1. Message contents are defined in clause 6.3.2.2.2.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell). The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

6.3.2.2.2.4.2 Test procedure

The test consists of a single cell, configured as PCell in FR1. The System Simulator shall explicitly assign a random access preamble via dedicated signalling in the downlink. There are two subtests, to test both SSB-based non-contention based random access (subtest 1) and CSI-RS-based non-contention based random access (subtest 2).

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Ensure the UE will choose SSB with index 0 to complete this procedure. Establish SRB2 and DRB in the RRC Reconfiguration message.

2. Set the parameters according to Table 6.3.2.2.2.5-1 Subtest 1.

3. The SS shall signal a Random Access Preamble ID via a RRCReconfiguration message to the UE and initiate a Non-contention based Random Access procedure according to Table 6.3.2.2.2.4.3-3 and Table 6.3.2.2.2.4.3-4.

4. Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble

   4.1. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble has the Preamble Index associated with the SSB with index 0, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

5. Test 2: Correct behaviour when transmitting CSI-RS-based Random Access Preamble

   5.1. Set the parameters according to Table 6.3.2.2.2.5-1 Subtest 2.

   5.2. Repeat steps 1-3.

   5.3. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble has the Preamble Index associated with the CSI-RS configured, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

6. Test 3: Correct behaviour when receiving Random Access Response

   6.1. Repeat steps 1-3.

   6.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

   6.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power.

   6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 6.3.2.2.2.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in 6.3.2.2.2.5.

7. Test 4: Correct behaviour when not receiving Random Access Response

7.1. Repeat steps 1-3.

7.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

7.3. As no Random Access Response was received within the RA Response window configured in *RACH-ConfigCommon*, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power.

7.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

7.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

7.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 6.3.2.2.2.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in 6.3.2.2.2.5.

6.3.2.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.3.2.2.2.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-115 with SSB-Index 0 Table 4.6.3-120 with SSB-Index 0

Table 6.3.2.2.2.4.3-1: *FrequencyInfoUL-SIB* for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-62			
Information Element	**Value/remark**	**Comment**	**Condition**
FrequencyInfoUL-SIB SEQUENCE {			
p-Max	23	23 dBm	
}			

Table 6.3.2.2.2.4.3-2: RACH-ConfigCommon for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
rsrp-ThresholdSSB	RSRP_51		Subtest 1
prach-RootSequenceIndex CHOICE {			
0			
}			
msg1-SubcarrierSpacing	kHz 15		
	kHz 30		
}			

Table 6.3.2.2.2.4.3-3: CellGroupConfig for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex		
reconfigurationWithSync SEQUENCE {			
newUE-Identity	1		
t304	ms1000		
rach-ConfigDedicted			
uplink	RACH-ConfigDedicated for Non-Contention Based Random Access	Table 6.3.2.2.2.4.3-4	
}			
spCellConfigDedicated SEQUENCE {			
firstActiveDownlinkBWP-Id	BWP-Id		
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
srs-Config	SRS-Config		
}			
firstActiveUplinkBWP-Id	BWP-Id		
}			
}			
}			
}			

Table 6.3.2.2.2.4.3-4: RACH-ConfigDedicated for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	1 entry		
ssb[1]	0		
ra-PreambleIndex[1]	40		Subtest 1
}			
ra-ssb-OccasionMaskIndex	1		Subtest 1
}			
csirs SEQUENCE {			
csirs-ResourceList SEQUENCE (SIZE(1..maxRA-CSIRS -Resources)) OF {			
ra-OccasionList	1		Subtest 2
ra-PreambleIndex[1]	40		Subtest 2
}			
rsrp-ThresholdCSI-RS	RSRP_51		Subtest 2
}			
}			
}			
}			

Table 6.3.2.2.2.4.3-5: RACH-ConfigGeneric for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	102		
msg1-FDM	one		

zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-120		
preambleTransMax	n6		
powerRampingStep	dB2		
ra-ResponseWindow	sl10		
}			

Table 6.3.2.2.2.4.3-6: *ServingCellConfigCommonSIB* for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-169			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommonSIB ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	-5		
}			

6.3.2.2.2.5 Test requirement

Table 6.3.2.2.2.5-1 defines the primary level settings for non-contention based random access test in FR1 for NR Standalone. Tables 6.3.2.2.2.5-2, 6.3.2.2.2.5-3 and 6.3.2.2.2.5-4 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances.

Table 6.3.2.2.2.5-1: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Subtest 1	Subtest 2	Comments
SSB Configuration	Config 1		SSB.1 FR1	SSB.1 FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB.2 FR1	SSB.2 FR1	
Number of SSBs per SS-burst			2	2	Different from the definition in A.3.10
SS/PBCH block index			0,1	0,1	Different from the definition in A.3.10
CSI-RS Configuration	Config 1		N/A	CSI-RS.1.1 FDD	As defined in A.3.1.4
	Config 2			CSI-RS.2.1 TDD	
Duplex Mode for Cell 1	Config 1		FDD	FDD	
	Config 2		TDD	TDD	
TDD Configuration	Config 2		TDDConf.2.1	TDDConf.2.1	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	TRS.1.1 FDD	
	Config 2		TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern Note 1			OCNG pattern 1	OCNG pattern 1	As defined in A. 2.1.
PDSCH parameters Note 4	Config 1		SR.1.1 FDD	SR.1.1 FDD	As defined in A.1.1.
	Config 2		SR.2.1 TDD	SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 TDD	CR.1.1 TDD	
	Config 2		CR.2.1 TDD	CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 2		CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			
EPRE ratio of PDSCH_DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH_DMRS		dB			
SSB with index 0	$\hat{E}_s / I_{ot}$	dB	3	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc} Config 1	dBm/15kHz	-98	-98	
	N_{oc} Config 2		-101	-101	
	$\hat{E}_s / N_{oc}$	dB	3	3	

	SS-RSRP Note 3	Config 1	dBm/15kHz	-95	-95	
		Config 2		-98	-98	
	SS-RSRP Note 3		dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s/I_{ot}$		dB	-17	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	-98	
		Config 2		-101	-101	
	$\hat{E}_s/N_{oc}$		dB	-17	-17	
	SS-RSRP Note 3	Config 1	dBm/15kHz	-115	-115	
		Config 2		-118	-118	
	SS-RSRP Note 3		dBm/ SCS	-115	-115	
Io Note 2		Config 1	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-62.2/38.16MHz	-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{\mathrm{CMAX,\ f,c}}$)			dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
PRACH Configuration				FR1 PRACH configuration 2	FR1 PRACH configuration 3	As defined in A. 7.1.
Propagation Condition			-	AWGN	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: Es/Iot, SS-RSRP and Io level have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: Void.
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.
- The Random Access Preamble shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0.
- The selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

Test 2: Correct behaviour when transmitting CSI-RS-based Random Access Preamble

- The Random Access Preamble shall have the Preamble Index associated with the CSI-RS configured.
- The Random Access Preamble shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured.
- The selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

Test 3: Correct behaviour when receiving Random Access Response

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.2.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 6.3.2.2.2.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.3.2.2.2.5-4.

Test 4: Correct behaviour when not receiving Random Access Response

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.2.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 6.3.2.2.2.5-3.

- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.3.2.2.2.5-4.

Table 6.3.2.2.2.5-2 Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 6.3.2.2.2.5-3 Relative power tolerance Test requirements

Power step ΔP (Up or down) (dB)	PRACH (dB)
2 ≤ ΔP < 3	± 3.2

Table 6.3.2.2.2.5-4: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	15	15	880*T_c
	30	30	624*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

6.3.2.2.3 NR SA FR1 2-step contention based random access

6.3.2.2.3.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the MsgA PRACH and MsgA PUSCH power settings and timing are within specified limits.

6.3.2.2.3.2 Test applicability

This test applies to all types of NR FR1 UE from Release 16 onwards and twoStepRACH-r16.

6.3.2.2.3.3 Minimum conformance requirement

Same as in clause 4.3.2.2.3.3.

The normative reference for this requirement is TS 38.133 [6] clause 6.2.2 and A.6.3.2.2.3.

6.3.2.2.3.4 Test description

6.3.2.2.3.4.1 Initial conditions

This test can be run in the configurations defined in Table 6.3.2.2.3.4.1-1.

Table 6.3.2.2.3.4.1-1: Supported test configurations

Test Case ID	Test Config Index	Description
6.3.2.2.3-1	1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.3.2.2.3-2	2	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations		

Before the test procedure, Downlink and Uplink calibrations are carried out to derive signalled parameter values. This is necessary to ensure that the test case operates within the specified ranges. The detail of the calibration process is implementation dependent, but shall derive the values of Δ_{DL} and Δ_{UL} according to the following principles:

With the UE configured to report SS-RSRP, the Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value according to TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied at the Reference point. For a Reported value RSRP_x, x is treated as a positive integer value.

With the UE configured to send a first PRACH preamble, Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied at the Reference point, and with signalled values *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm.

Configure the test equipment and the DUT according to the parameters in Table 6.3.2.2.3.4.1-2.

Table 6.3.2.2.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.3.2.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. Message contents are defined in clause 6.3.2.2.3.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell). The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

6.3.2.2.3.4.2 Test procedure

The test consists of a single cell, configured as PCell in FR1. The System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity *NR* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 6.3.2.2.1.5-1.

3. The UE shall establish a connection setup with SS, the random access procedure within the connection setup is used in the test.

4. Test 1: Correct behaviour when transmitting MsgA:

   4.1. The UE shall send a MsgA to the System Simulator. The System Simulator shall check that the MsgA preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SSB_RP above the configured rsrp-ThresholdSSB.

   4.2 Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 6.3.2.2.3.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 6.3.2.2.3.5.

5. Test 2: Correct behaviour when receiving MsgB:

   5.1. Repeat steps 1-3.

   5.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB containing identifiers that do not match the transmitted Random Access Preamble.

   5.3. As the received MsgB contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

   5.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

5.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 6.3.2.2.3.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 6.3.2.2.3.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 6.3.2.2.3.5.

6. Test 3: Correct behaviour when not receiving MsgB:

6.1. Repeat steps 1-3.

6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

6.3. As no MsgB was received within the RA Response window, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

6.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

6.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

6.6 Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 6.3.2.2.3.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 6.3.2.2.3.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 6.3.2.2.3.5.

6.3.2.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3.1 with the following exceptions:

Table 6.3.2.2.3.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-115 with SSB-Index 0 Table 4.6.3-120 with SSB-Index 0

Table 6.3.2.2.3.4.3-1: *Same as Table 4.3.2.2.3.4.3-1*

Table 6.3.2.2.3.4.3-2: *Same as Table 4.3.2.2.3.4.3-2*

6.3.2.2.3.5 Test requirement

Table 6.3.2.2.3.5-2 defines the primary level settings for contention based random access test in FR1 for NR Standalone.

Table 6.3.2.2.1.5-1: General test parameters

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 FR1	As defined in A.3.1, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB.2 FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.1

Parameter			Unit	Test-1	Comments
SS/PBCH block index				0,1	Different from the definition in A.3.1
Duplex Mode for Cell 2		Config 1		FDD	
		Config 2		TDD	
TDD Configuration		Config 2		TDDConf.2.1	
CSI-RS for tracking		Config 1		TRS.1.1 FDD	
		Config 2		TRS.1.2 TDD	
OCNG Pattern Note 1				OP.1	As defined in A.2.1
PDSCH parameters Note 4		Config 1		SR.1.1 FDD	As defined in A.1.1
		Config 2		SR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s/I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	
		Config 2		-101	
	$\hat{E}_s/N_{oc}$		dB	3	
	SS-RSRP	Config 1	dBm/15kHz	-95	
		Config 2		-98	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s/I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	
		Config 2		-101	
	$\hat{E}_s/N_{oc}$		dB	-17	
	SS-RSRP	Config 1	dBm/15kHz	-115	
		Config 2		-118	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{\mathrm{CMAX,f,c}}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
MsgA Configuration				FR1 MsgA configuration 1	As defined in FFS.
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Test 1: Correct behaviour when transmitting MsgA:

- The MsgA shall be one of the Random Access Preambles associated with SSB index 0.
- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.3.5-2.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 6.3.2.2.3.5-2A.

Test 2: Correct behaviour when receiving MsgB:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.3.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 6.3.2.2.3.5-3.
- The transmit timing of all MsgA PRACH transmissions shall be within the accuracy specified in Table 6.3.2.2.3.5-4.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 6.3.2.2.3.5-2A.

Test 3: Correct behaviour when not receiving MsgB:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.3.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 6.3.2.2.3.5-3.
- The transmit timing of all MsgA PRACH transmissions shall be within the accuracy specified in Table 6.3.2.2.3.5-4.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 6.3.2.2.3.5-2A.

Table 6.3.2.2.3.5-2: MsgA PRACH Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 6.3.2.2.3.5-2A: MsgA PUSCH Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 6.3.2.2.3.5-3: Relative power tolerance Test requirements

Power step ΔP (Up or down) (dB)	MsgA PRACH (dB)
$2 \leq \Delta P < 3$	± 3.2 dB

Table 6.3.2.2.3.5-4: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	15	15	$880*T_c$
	30	30	$624*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [7]			

6.3.2.2.4 NR SA FR1 2-step non-contention based random access

6.3.2.2.4.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the MsgA PRACH and MsgA PUSCH power settings and timing are within specified limits.

6.3.2.2.4.2 Test applicability

This test applies to all types of NR FR1 UE from Release 16 onwards and twoStepRACH-r16.

6.3.2.2.4.3 Minimum conformance requirement

Same as in clause 4.3.2.2.4.3.

The normative reference for this requirement is TS 38.133 [6] clause 6.2.2 and A.6.3.2.2.4.

6.3.2.2.4.4 Test description

6.3.2.2.4.4.1 Initial conditions

This test can be run in the configurations defined in Table 6.3.2.2.4.4.1-1.

Table 6.3.2.2.4.4.1-1: Supported test configurations

Test Case ID	Test Config Index	Description
6.3.2.2.4-1	1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.3.2.2.4-2	2	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations		

Before the test procedure, Downlink and Uplink calibrations are carried out to derive signalled parameter values. This is necessary to ensure that the test case operates within the specified ranges. The detail of the calibration process is implementation dependent, but shall derive the values of Δ_{DL} and Δ_{UL} according to the following principles:

With the UE configured to report SS-RSRP, the Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value according to TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied at the Reference point. For a Reported value RSRP_x, x is treated as a positive integer value.

With the UE configured to send a first PRACH preamble, Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied at the Reference point, and with signalled values *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm.

Configure the test equipment and the DUT according to the parameters in Table 6.3.2.2.4.4.1-2.

Table 6.3.2.2.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.1 and Table E.3-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.3.2.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. Message contents are defined in clause 6.3.2.2.4.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell). The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

6.3.2.2.4.4.2 Test procedure

The test consists of a single cell, configured as PCell in FR1. The System Simulator shall explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.
2. Set the parameters according to Table 6.3.2.2.1.5-1.
3. The SS shall signal a Random Access Preamble ID via a RRCReconfiguration message to the UE and initiate a Non-contention based Random Access procedure according to Table 6.3.2.2.2.4.3-3 and Table 6.3.2.2.2.4.3-4.
4. Test 1: Correct behaviour when transmitting MsgA:

4.1. The UE shall send a MsgA to the System Simulator. The System Simulator shall check that the MsgA preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *msgA-SSB-SharedRO-MaskIndex*.

4.2 Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 6.3.2.2.4.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 6.3.2.2.4.5.

5. Test 2: Correct behaviour when receiving MsgB:

5.1. Repeat steps 1-3.

5.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB containing identifiers that do not match the transmitted Random Access Preamble.

5.3. As the received MsgB contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

5.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

5.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 6.3.2.2.4.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 6.3.2.2.4.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 6.3.2.2.4.5.

6. Test 3: Correct behaviour when not receiving MsgB:

6.1. Repeat steps 1-3.

6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

6.3. As no MsgB was received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA*, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

6.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

6.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 6.3.2.2.3.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 6.3.2.2.3.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 6.3.2.2.4.5.

6.3.2.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3.1 with the following exceptions:

Table 6.3.2.2.4.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-115 with SSB-Index 0 Table 4.6.3-120 with SSB-Index 0

Table 6.3.2.2.4.4.3-1: *Same as Table 4.3.2.2.3.4.3-1*

Table 6.3.2.2.4.4.3-2: *Same as Table 4.3.2.2.3.4.3-2*

Table 6.3.2.2.4.4.3-3: *Same as Table 4.3.2.2.3.4.3-3*

6.3.2.2.4.5 Test requirement

Table 6.3.2.2.4.5-2 defines the primary level settings for non-contention based random access test in FR1 for NR Standalone.

Table 6.3.2.2.1.5-1: General test parameters

Parameter			Unit	Test-1	Comments
SSB Configuration		Config 1		SSB.1 FR1	As defined in A.3.1, except for number of SSBs per SS-burst and SS/PBCH block index as below
		Config 2		SSB.2 FR1	
Number of SSBs per SS-burst				2	Different from the definition in A.3.1
SS/PBCH block index				0,1	Different from the definition in A.3.1
Duplex Mode for Cell 2		Config 1		FDD	
		Config 2		TDD	
TDD Configuration		Config 2		TDDConf.2.1	
CSI-RS for tracking		Config 1		TRS.1.1 FDD	
		Config 2		TRS.1.2 TDD	
OCNG Pattern Note 1				OP.1	As defined in A.2.1
PDSCH parameters Note 4		Config 1		SR.1.1 FDD	As defined in A.1.1
		Config 2		SR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s/I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	
		Config 2		-101	
	$\hat{E}_s/N_{oc}$		dB	3	
	SS-RSRP	Config 1	dBm/15kHz	-95	
		Config 2		-98	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s/I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-98	
		Config 2		-101	
	$\hat{E}_s/N_{oc}$		dB	-17	
	SS-RSRP	Config 1	dBm/15kHz	-115	
		Config 2		-118	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-62.2/38.16MHz	

Parameter	Unit	Test-1	Comments
ss-PBCH-BlockPower	dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,f,c}$)	dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
MsgA Configuration		FR1 MsgA configuration 2	As defined in FFS.
msgA-RSRP-ThresholdSSB	dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
Propagation Condition	-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.			

Test 1: Correct behaviour when transmitting MsgA:

- The MsgA shall be one of the Random Access Preambles associated with SSB index 0.
- The MsgA shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0.
- The selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *msgA-SSB-SharedRO-MaskIndex*.
- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.4.5-2.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 6.3.2.2.4.5-2A.

Test 2: Correct behaviour when receiving MsgB:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.4.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 6.3.2.2.4.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.3.2.2.4.5-4.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 6.3.2.2.4.5-2A.

Test 3: Correct behaviour when not receiving MsgB:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 6.3.2.2.4.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 6.3.2.2.4.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 6.3.2.2.4.5-4.
- The power of the first MsgA PUSCH transmission shall be -25 dBm for test configuration 1 and -22 dBm for test configuration 2 within the accuracy specified in Table 6.3.2.2.4.5-2A.

Table 6.3.2.2.4.5-2: MsgA PRACH Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 6.3.2.2.4.5-2A: MsgA PUSCH Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 6.3.2.2.4.5-3: Relative power tolerance Test requirements

Power step ΔP (Up or down) (dB)	MsgA PRACH (dB)
2 ≤ ΔP < 3	± 3.2 dB

Table 6.3.2.2.4.5-4: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	15	15	$880*T_c$
	30	30	$624*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [7]			

6.3.2.3 RRC connection release with redirection

6.3.2.3.0 Minimum conformance requirements

6.3.2.3.0.1 Minimum conformance requirements for FR1 RRC connection release with redirection

The UE shall be capable of performing the RRC connection release with redirection to the target NR cell within $T_{connection_release_redirect_NR}$.

The time delay ($T_{connection_release_redirect_NR}$) is the time between the end of the last slot containing the RRC command, "*RRCRelease*" (TS 38.331 [2]) on the NR PDSCH and the time the UE starts to send random access to the target NR cell. The time delay ($T_{connection_release_redirect_NR}$) shall be less than:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH}$$

The target NR cell shall be considered detectable when for each relevant SSB, the side conditions should be met that,

- SSB_RP and SSB Ês/Iot according to Annex B.2.5 for a corresponding NR Band.

$T_{RRC_procedure_delay}$: It is the RRC procedure delay for processing the received message "*RRCRelease*" as defined in clause 6.2.2 of TS 38.331 [2].

$T_{identify\text{-}NR}$: It is the time to identify the target NR cell and depend on the frequency range (FR) of the target NR cell. It is defined in table 6.3.2.3.0.1-1. Note that $T_{identify\text{-}NR} = T_{PSS/SSS\text{-}sync} + T_{meas}$, in which $T_{PSS/SSS\text{-}sync}$ is the cell search time and T_{meas} is the measurement time due to cell selection criteria evaluation.

$T_{SI\text{-}NR}$: It is the time required for acquiring all the relevant system information of the target NR cell. This time depends upon whether the UE is provided with the relevant system information of the target NR cell or not by the old NR cell before the RRC connection is released. $T_{SI\text{-}NR} = 0$ provided the UE is provided with the SI (including MIB and all relevant SIBs) of the target NR cell before the RRC connection is released by the old NR cell.

T_{RACH}: It is the delay caused due to the random access procedure when sending random access to the target NR cell. This delay depends on the PRACH configuration defined in Table 6.3.3.2-2 [6] or Table 6.3.3.2-3 [6] for FR1 and in Table 6.3.3.2-4 [6] for FR2.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the redirection command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing configured for the RRC connection release with redirection. If the UE is not provided with SMTC configuration or measurement object for the frequency which is also configured for the RRC connection release with redirection then:

- the requirement in this section is applied with T_{rs} = 20 ms assuming the SSB transmission periodicity is not larger than 20 ms,

- there is no requirement if the SSB transmission periodicity is larger than 20ms.

Table 6.3.2.3.0.1-1: Time to identify target NR cell for RRC connection release with redirection to NR

Frequency range (FR) of target NR cell	$T_{identify\text{-}NR}$
FR1	MAX (680 ms, [11] x T_{rs})

FR2	MAX (880 ms, 8x[11] x T_{rs})
Note : If the UE has been provided with higher layer in TS 38.331 [2] signalling of *smtc2* prior to the redirection command, SMTC follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.	

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.3.2.1.

6.3.2.3.0.2 Minimum conformance requirements for FR1 – E-UTRAN RRC connection release with redirection

The UE shall be capable of performing the RRC connection release with redirection to the target E-UTRAN cell within $T_{connection_release_redirect_E\text{-}UTRA}$.

The time delay ($T_{connection_release_redirect_E\text{-}UTRA}$) is the time between the end of the last slot containing the RRC command, "*RRCRelease*" (TS 38.331 [2]) on the PDSCH and the time the UE starts to send random access to the target E-UTRA cell. The time delay ($T_{connection_release_redirect_E\text{-}UTRA}$) shall be less than:

$$T_{connection_release_redirect_E\text{-}UTRA} = T_{RRC_procedure_delay} + T_{identify\text{-}E\text{-}UTRA} + T_{SI\text{-}E\text{-}UTRA} + T_{RACH}$$

The target E-UTRA FDD or TDD cell shall be considered detectable when for each relevant SSB:

- RSRP related conditions in the accuracy requirements in Section 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2 and Annex B.3 of TS 36.133 [15],
- RSRQ related conditions in the accuracy requirements in Section 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2 and Annex B.3 of TS 36.133 [15],
- RS-SINR related conditions in the accuracy requirements in Section 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2 and Annex B.3 of TS 36.133 [15].

$T_{RRC_procedure_delay}$: It is the RRC procedure delay for processing the received message "*RRCRelease*" as defined in clause 6.2.2 of TS 38.331 [2].

$T_{identify\text{-}E\text{-}UTRA}$: It is the time to identify the target E-UTRA cell. It shall be less than 320 ms.

$T_{SI\text{-}E\text{-}UTRA}$: It is the time required for acquiring all the relevant system information of the target E-UTRA cell. This time depends upon whether the UE is provided with the relevant system information (SI) of the target E-UTRA cell or not by the old NR cell before the RRC connection is released. $T_{SI\text{-}E\text{-}UTRA} = 0$ provided the UE is provided with the SI (including MIB and all relevant SIBs) of the target E-UTRA cell before the RRC connection is released by the old NR cell.

T_{RACH}: It is the delay caused due to the random access procedure when sending random access to the target E-UTRA cell.

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.3.2.2.

6.3.2.3.1 NR SA FR1 RRC connection release with redirection

6.3.2.3.1.1 Test purpose

This test is to verify RRC connection release with redirection from NR to NR.

6.3.2.3.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.3.2.3.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.3.2.3.0.1.

The normative reference for this requirement is TS 38.133 [6] A.6.3.2.3.1.

6.3.2.3.1.4 Test description

6.3.2.3.1.4.1 Initial conditions

This test can be run in the configurations defined in Table 6.3.2.3.1.4.1-1.

Table 6.3.2.3.1.4.1-1: Redirection from NR to NR test configurations

Configuration	Description
6.3.2.3.1-1	Source cell: NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.3.2.3.1-2	Source cell: NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.3.2.3.1-3	Source cell: NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.3.2.3.1.4.1-2.

Table 6.3.2.3.1.4.1-2: Initial conditions for Redirection from NR to NR test case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameters for PCell and neighbour cell are given in Table 6.3.2.3.1.4.1-3 below.

2. Message contents are defined in clause 6.3.2.3.1.4.3.

3. There are two carriers and two NR cells specified in the test. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 6.3.2.3.1.4.1-3: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	2.3	

6.3.2.3.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The "*RRCRelease*" message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2. Cell 1 and Cell 2 belong to different tracking areas.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 6.3.2.3.1.5-1. T1 starts.

3. SS shall transmit an *RRCRelease* during period T1.

4. The SS shall switch the power setting from T1 to T2 as specified in Table 6.3.2.3.1.5-1. When the last TTI containing the *RRCRelease* message is sent to UE, T2 starts.

5. If the UE transmits the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

6. After T2 expires, the UE shall be switched off. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell and Cell 2 shall be powered OFF.

7. The SS shall set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

8. Repeat step 2-7 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

6.3.2.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.3.2.3.1.4.3-1: RRCRelease for NR RRC redirection

Derivation Path: TS 38.508-1 [14], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCRelease ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcRelease SEQUENCE {			
redirectedCarrierInfo CHOICE {			
nr SEQUENCE {			
carrierFreq	ARFCN-ValueNR	Frequency of Cell 2	
ssbSubcarrierSpacing	kHz15		Config 1,2
	kHz30		Config 3
smtc SEQUENCE {			
duration	sf1		SMTC.1
	sf5		SMTC.2
}			
}			
}			
}			
}			
}			

Table 6.3.2.3.1.4.3-2: SIB2

Derivation Path: TS 38.508-1 [14], Table 4.6.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionInfoCommon SEQUENCE {			
rangeToBestCell	Not present		
}			

6.3.2.3.1.5 Test requirement

Table 6.3.2.3.1.5-1 defines the primary level settings for Redirection from NR to NR test case.

Table 6.3.2.3.1.5-1: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
SSB Configuration	Config 1		SSB.1 FR1			
	Config 2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
CSI-RS for tracking	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			

TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR 2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR 2.1 TDD			
OCNG Patterns			OP.1			
SMTC configuration	Config 1,2		SMTC.1			
	Config 3		SMTC.2			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s / N_{oc}$		dB	4	4	-infinity	4
Io Note3	Config 1,2	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-64.59
	Config 3	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-58.49
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.

The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms and is specified in clause 12 in TS 38.331 [13].

$T_{identify\text{-}NR}$ = 680 ms in the test.

$T_{SI\text{-}NR}$ = 1280 ms is assumed, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH} = 170 ms in the test.

This gives a total of 2240 ms.

6.3.2.3.2 NR SA FR1 – E-UTRA RRC connection release with redirection

6.3.2.3.2.1 Test purpose

This test is to verify RRC connection release with redirection from NR to E-UTRAN.

6.3.2.3.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.3.2.3.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.3.2.3.0.2.

The normative reference for this requirement is TS 38.133 [6] A.6.3.2.3.2.

6.3.2.3.2.4 Test description

6.3.2.3.2.4.1 Initial conditions

This test can be run in the configurations defined in Table 6.3.2.3.2.4.1-1.

Table 6.3.2.3.2.4.1-1: Redirection from NR to E-UTRAN test configurations

Configuration	Description
6.3.2.3.2-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE FDD
6.3.2.3.2-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE FDD
6.3.2.3.2-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE FDD
6.3.2.3.2-4	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE TDD
6.3.2.3.2-5	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE TDD
6.3.2.3.2-6	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.2.3.2.4.1-2.

Table 6.3.2.3.2.4.1-2: Initial conditions for Redirection from NR to E-UTRAN test case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameters settings are given in Table 6.3.2.3.2.4.1-3 below.

2. Message contents are defined in clause 6.3.2.3.2.4.3.

3. There are two cells specified in the test. Cell 1 is the NR PCell and Cell 2 is the E-UTRAN neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 6.3.2.3.2.4.1-3: General test parameters for Redirection from NR to E-UTRAN test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	2.3	

6.3.2.3.2.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The "*RRCRelease*" message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 6.3.2.3.2.5-1 and 6.3.2.3.2.5-2. T1 starts.
3. SS shall transmit an *RRCRelease* during period T1.
4. The SS shall start T2 timer when the last TTI containing the *RRCRelease* message is sent to UE.
5. When T2 starts, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.2.3.2.5-1 for Cell 1 and Table 6.3.2.3.2.5-2 for Cell 2.
6. The UE shall transmit RRCConnectionRequest message.
7. If the UE transmits the PRACH to Cell 2 less than 2205 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
8. After T2 expires, the UE shall be switched off. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell and Cell 2 shall be powered OFF.
9. The SS shall set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14+2) for next iteration of the test procedure loop.
10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

6.3.2.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.3.2.3.2.4.3-1: RRCRelease for Inter-RAT RRC redirection

Derivation Path: TS 38.508-1 [14], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCRelease ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcRelease SEQUENCE {			
redirectedCarrierInfo CHOICE {			
eutra SEQUENCE {			
eutraFrequency	ARFCN-ValueEUTRA	Frequency of Cell 2	
cnType	epc		
}			

}			
}			
}			
}			

6.3.2.3.2.5 Test requirement

Table 6.3.2.3.2.5-1 and 6.3.2.3.2.5-2 define the primary level settings for Redirection from NR to E-UTRAN test case.

Table 6.3.2.3.2.5-1: Cell specific test parameters for Redirection from NR to E-UTRAN test case(Cell 1)

Parameter		Unit	Cell 1	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
SSB Configuration	Config 1,4		SSB.1 FR1	
	Config 2,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		40: $N_{RB,c}$ = 106	
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2,5		10: $N_{RB,c}$ = 52	
	Config 3,6		40: $N_{RB,c}$ = 106	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD	
CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD	
OCNG Patterns			OCNG pattern 1	
SMTC configuration	Config 1,2,4,5		SMTC.1 FR1	
	Config 3,6		SMTC.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30 kHz	
PRACH configuration			FR1 PRACH configuration 1	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-98	
	Config 3,6		-95	

Parameter		Unit	Cell 1	
			T1	T2
$\hat{E}_s/I_{ot}$		dB	4	4
$\hat{E}_s/N_{oc}$		dB	4	4
Io[Note3]	Config 1,2,4,5	dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6	dBm/ 38.16MHz	-58.49	-58.49
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.3.2.3.2.5-1: Cell specific test parameters for Redirection from NR to E-UTRAN test case(Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5MHz: $N_{RB,c}$ = 25 10MHz: $N_{RB,c}$ = 50 20MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1, 2, 3	4	
		4, 5, 6	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5MHz: R.7 FDD 10MHz: R.3 FDD 20MHz: R.6 FDD	
		4, 5, 6	5MHz: R.4 TDD 10MHz: R.0 TDD 20MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5MHz: R.11 FDD 10MHz: R.6 FDD 20MHz: R.10 FDD	
		4, 5, 6	5MHz: R.11 TDD 10MHz: R.6 TDD 20MHz: R.10 TDD	
OCNG Patterns[Note3]		1, 2, 3	5MHz: OP.20 FDD 10MHz: OP.10 FDD 20MHz: OP.17 FDD	
		4, 5, 6	5MHz: OP.9 TDD 10MHz: OP.1 TDD 20MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				

Parameter	Unit	Configuration	Cell 2	
			T1	T2
N_{oc} Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	4
$\hat{E}_s/I_{ot}$ Note6	dB	1, 2, 3, 4, 5, 6	-Infinity	4
RSRP Note6	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-94
SCH_RP Note6	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-94
Io Note6	dBm/9MHz	1, 2, 3, 4, 5, 6	-70.22	-64.76
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211.
Note 3: DL RMCs and OCNG patterns are specified in sections A 3.1 and A 3.2 of TS 36.133 respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in section B.2 in TS 36.101 [27].

The UE shall start to transmit the PRACH to Cell 2 less than 2205 ms from the beginning of time period T2.

The rate of correct RRC connection release redirection to E-UTRAN observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_E\text{-}UTRA} = T_{RRC_procedure_delay} + T_{identify\text{-}E\text{-}UTRA} + T_{SI\text{-}E\text{-}UTRA} + T_{RACH},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms and is specified in clause 12 in TS 38.331 [2].

$T_{identify\text{-}E\text{-}UTRA}$ = 800 ms in the test.

$T_{SI\text{-}E\text{-}UTRA}$ = 1280 ms is assumed, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target E-UTRAN cell.

T_{RACH} = 15 ms in the test.

This gives a total of 2205 ms.

6.3.2.4 LTM PDCCH-order Random Access

6.3.2.4.0 Minimum conformance requirements

When PRACH transmission is triggered by PDCCH order on target LTM cell,

- During RACH transmission, the UE is allowed an interruption on activated serving cell's DL slot(s) overlapped with RACH occasion depending on UE capability.
- Before and after PRACH transmission, UE is allowed an interruption on any activated serving cell as follows:
  - an interruption on any active serving cell:
    - of up to the duration shown in table 6.3.2.4.0-1, if PRACH bandwidth is outside active UL BWP but within one of configured UL BWPs of any active serving cell, or
    - of up to ceil(Y/NR Slot length)+1 slots, where Yms as reported in UE capability, if PRACH bandwidth is outside any of the configured UL BWPs of any active serving cell

Table 6.3.2.4.0-1: Interruption duration due to PDCCH ordered RACH on target LTM cell when PRACH bandwidth is outside active UL BWP but within one of configured UL BWPs of any active serving cell

μ	NR Slot length (ms) of victim cell	Interruption length X (slots)

0	1	2
1	0.5	2
2	0.25	4
3	0.125	6

The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{TA} + N_{TA\ offset}) \times T_c$. The downlink timing is defined as the time when the first path (in time) of the corresponding downlink frame used by the UE to determine downlink timing is received from the reference cell at the UE antenna. N_{TA} for PRACH is defined as 0.

$(N_{TA} + N_{TA\ offset}) \times T_c$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{TA\ offset}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{TA\ offset}$ is defined in Table 6.3.2.4.0-2.

Table 6.3.2.4.0-2: The Value of $N_{TA\ offset}$

Frequency range and band of cell used for uplink transmission	$N_{TA\ offset}$ (Unit: T_c)
FR1 FDD or TDD band with neither E-UTRA–NR nor NB-IoT–NR coexistence case	25600 (Note 1)
FR1 FDD band with E-UTRA–NR and/or NB-IoT–NR coexistence case	0 (Note 1)
FR1 TDD band with E-UTRA–NR and/or NB-IoT–NR coexistence case	39936 (Note 1)
FR2	13792
Note 1: The UE identifies $N_{TA\ offset}$ based on the information n-TimingAdvanceOffset as specified in TS 38.331 [13]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{TA\ offset}$ is set as 25600 for FR1 band. Note 2: Void	

6.3.2.4.1 NR SA FR1 PDCCH-order RACH on neighbour cell when RACH BW is within active UL BWP

6.3.2.4.1.1 Test Purpose

This test is to verify the requirement for PDCCH-order RACH on neighbour cell in FR1 when RACH BW is within active UL BWP specified in TS 38.213 clause 8.1 [8] and UE transmit timing in TS 38.133 [6] clause 7.1 for UE supporting *rach-EarlyTA-Measurement-r18*.

6.3.2.4.1.2 Test applicability

This test applies to all NR UEs supporting NR LTM for MCG with RACH-less, L1-RSRP measurement and report, as well as interruptions caused by PDCCH order from Release 18 onwards, and with optional support for *rach-EarlyTA-Measurement-r18*. The test consists of 3 subtests, and the UE is required to pass one among them.

6.3.2.4.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.3.2.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.2.4.1.

6.3.2.4.1.4 Test description

6.3.2.4.1.4.1 Initial conditions

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. Test configurations are given in table 6.3.2.4.1.4-1. No gap patterns are configured in the test case.

Table 6.3.2.4.1.4-1: PDCCH order RACH on Neighbour cell in FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Candidate cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Candidate cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Candidate: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.2.4.1.4-2.

Table 6.3.2.4.1.4-2: Initial conditions for PDCCH-order RACH on Neighbour cell in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.4.1.4-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	No fader.		

1. Message contents are defined in clause 6.3.2.4.1.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell). Cell 2 is the NR FR1 neighbour cell. The UE has to report L3 measurement results and performs SSB based L1-RSRP measurement on Cell 2.

6.3.2.4.1.4.2 Test procedure

This test case contains 3 tests (Test 1, 2, and 3) and UE may have to pass one of the tests based on the defined conditions.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 6.3.2.4.1.5-1 and 6.3.2.4.1.5-2.
3. The UE shall establish a connection setup with SS Cell 1, the random access procedure within the connection setup is used in the test.
4. The SS shall transmit an RRCReconfiguration message to configure event A3 triggered measurement reporting.
5. The UE shall transmit a MeasurementReport message triggered by Event A3.
6. The SS sends LTM-Candidate-r18 for Cell 2.
7. UE is configured with SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports on candidate cell (Cell 2) in PUCCH format 2, and UE shall report a valid L1-RSRP result of Cell 2.

If a UE supports *ltm-MAC-CE-JointTCI-r18*, it is only required to pass test 1. If a UE supports *ltm-MAC-CE-SeparateTCI-r18* and does not support *ltm-MAC-CE-JointTCI-r18*, it is only required to pass test 2. If a UE supports neither *ltm-MAC-CE-SeparateTCI-r18* nor *ltm-MAC-CE-JointTCI-r18*, it is only required to pass test 3.

8. Test 1: Joint TCI state configuration

   8.1. T1 starts from UE transmitting a valid L1 report of Cell 2.

   8.2. The SS sends TCI state activation MAC CE to active CandidateTCI-State#1 of Cell 2 no later than T1 + 100 ms.

8.3. The start of T2 is the instant when DCI 1_0 PDCCH order to trigger PRACH transmission on Cell 2 is sent to the UE. The SS change the parameters according to T2 in Table 6.3.2.4.1.5-1 and 6.3.2.4.1.5-2. The SS shall schedule on cell 1 continuously for both UL and DL at available slots.

8.4. The UE shall transmit the PRACH preamble to Cell 2. If the UE transmits the PRACH preamble in the first available PRACH occasion after $N_{T,2}$ + 0.5ms + T_{SSB} (specified in clause 6.3.2.4.1.5) from the beginning of T2, then count a success for the event "PRACH occasion". Otherwise count a fail for the event "PRACH occasion".

8.5. If the timing of PRACH transmission on Cell 2 is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ (specified in clause 6.3.2.4.1.5) of the first detected path of DL SSB of Cell 2, then count a success for the event "PRACH timing". Otherwise, count a fail for the event "PRACH timing".

8.6. During T2, if UL DTX is only observed by the SS within [the overlapped slot to transmit PRACH] and 2 symbols before and after the PRACH occasion, and DL DTX is only observed by the SS within the overlapped slot to transmit PRACH, then count a success for the event "Pcell DTX". Otherwise, count a fail for the event "Pcell DTX".

8.7. Repeat step 1-8 until a test verdict has been achieved.

9. Test 2: Separate TCI state configuration

   Test steps are the same as Step 8 with following exceptions:

   9.2. The SS sends TCI state activation MAC CE to active CandidateTCI-State#1 and CandidateTCI-UL-State #1 of Cell 2 no later than T1 + 100 ms.

   Repeat step 1-7 and 9 until a test verdict has been achieved.

10. Test 3: No candidate TCI state configurations

    Test steps are the same as Step 8 with following exceptions:

    The SS shall not send any TCI state activation MAC CE to active TCI state of Cell 2.

    Repeat step 1-7 and 10 until a test verdict has been achieved.

The rate of correct events observed during repeated tests shall be at least 90%.

Each of the events "PRACH occasion", "Pcell DTX" as well as "PRACH timing" are evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

6.3.2.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 6.3.2.4.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.1-7 with conditions INTRA-FREQ, SSB Index Table A.7.1-2 Table H.3.12-1 with Condition L1-RSRP Table H.3.12-2 with Condition L1-RSRP Table H.3.12-3 for Cell 2 with Condition Candidate Config, TA_PDCCH-ORDER, TCI_INFO (Test 1 and 2) Table H.3.12-4 Table H.3.12-5 for Cell 1 Table H.3.12-6, Table H.3.12-7 and Table H.3.12-13 with SSB-Index = 0 Table H.3.12-8 Table H.3.12-9 for Cell 2 Table H.3.12-10 with Condition Joint and Early DL Sync for Test 1 Table H.3.12-10 with Condition Separate for Test 2 Table H.3.12-12 for Cell 2 PDCCH configuration: Table A.1.3.1-1 CCR 1.2 FDD for test 1, Table A.1.3.2-1 CCR 1.2 TDD for test 2 and Table A.1.3.2-2 CCR 2.4 FDD for test 3 with following exceptions: aggregation level 16, allocated RB 48.
Specific message contents exceptions for Cell 2	Table H.3.1-3 with condition INTRA-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.3.2.4.1.4.3-2: ReportConfigNR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A3			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-12	The actual value is field value * 0.5 dB	
}			
hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
}			
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	True		
}			
}			

Table 6.3.2.4.1.4.3-3: CandidateTCI-State-r18

Derivation path: Table H.3.12-11			
Information Element	**Value/remark**	**Comment**	**Condition**
CandidateTCI-State-r18 ::= SEQUENCE {			
tci-StateId-r18	TCI-StateId-LTM(Id)		
qcl-Type1-r18 ::= SEQUENCE {			
referenceSignal-r18 CHOICE {			
ssb-Index	0		Id = 0 or 2
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4) specified in TS 38.508-1[14], table 7.3.1-11		Id = 1 or 3
}			
qcl-Type-r18	typeA		

}			
qcl-Type2-r18	Not present		
PathlossReferenceRS-Id-r18	Not present		Id = 2 or 3
	0		Id = 0 or 1
tag-Id-ptr-r18	Not present		
ul-powerControl-r18	Not present		
}			

6.3.2.4.1.5 Test requirement

Both PDCCH order RACH delay, transmit timing requirement and the interruption requirements are tested by using the parameters in table 6.3.2.4.1.5-1, and 6.3.2.4.1.5-2.Table 6.3.2.4.1.5-1: General test parameters for PDCCH order RACH in FR1

Parameter		Unit	Value			Comment
			Test 1	Test 2	Test 3	
Initial conditions	Active cell		Cell 1			
	Neighbouring cell		Cell 2			Cell 2 is the candidate cell
Final condition	Active cell		Cell 1			After transmitting PRACH on Cell 2, UE shall be back to Cell 1.
A3-Offset		dB	-6			
Hysteresis		dB	0			
Time To Trigger		ms	0			
Filter coefficient			0			L3 filtering is not used
DRX			OFF			DRX is not used
Time offset between cells			2 µs			RTD between cells is less than CP
deriveSSB-IndexFromCell			Enabled			
EarlyUL-SyncConfig	frequencyInfoUL		NR RF Channel Number 1			Same as Cell 1
	PRACH configuration		FR1 PRACH configuration 5			RACH bandwidth is within active UL BWP of Cell 1
	bwp-GenericParameters		ULBWP.0.1			
	n-TimingAdvanceOffset	Tc	25600			
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	80			Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1			Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1			
	spCellInclusion		N/A			
ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		DlorJointTCI.State.0	DlorJointTCI.State.2	N/A	As specified in TS 38.133 [6] clause A.3.16B. Configured for early TCI state activation for test 1 and test 2.
Ltm-UL-TCI-StatesToAddModList	CandidateTCI-UL-State#1		N/A	UL TCI.State.0	N/A	As specified in TS 38.133 [6] clause A.3.16B. Configured for early TCI state activation for test 2.
Ltm-ConfigComplete			True			Candidate cell's configuration is complete configuration
T1		s	0.3			
T2		s	≤0.5			

Table 6.3.2.4.1.5-2: Cell specific test parameters for PDCCH order RACH test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			

	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	N/A		
	Config 2		SR.1.1 TDD	N/A		
	Config 3		SR.2.1 TDD	N/A		
CORESET Reference Channel	Config 1		CR.1.1 FDD	N/A		
	Config 2		CR.1.1 TDD	N/A		
	Config 3		CR.2.1 TDD	N/A		
CP length			Normal			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	-0.64	-0.64	-0.64	-0.64
$\hat{E}_s / N_{oc}$		dB	8	8	8	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-90	-90
	Config 3	dBm/SCS	-87	-87	-87	-87
Io Note3	Config 1,2	dBm/9.36MHz	-58.7	-58.7	-58.7	-58.7
	Config 3	dBm/38.16MHz	-52.6	-52.6	-52.6	-52.6
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall transmit the PRACH preamble to Cell 2 in the first available PRACH occasion after $N_{T,2}$ + 0.5ms + T_{SSB} from the beginning of time period T2. After transmitting PRACH on Cell 2, UE shall retune back to Cell 1.

NOTE: The PDCCH order RACH delay can be expressed as: $N_{T,2} + T_{\mathrm{BWPswitchDelay}} + \Delta_{\mathrm{Delay}} + T_{\mathrm{switch}} + T_{\mathrm{SSB}} + \Delta_{\mathrm{RF/BB\ preparation}}$, where:

- $N_{T,2}$ is a time duration of N_2 symbols corresponding to a PUSCH preparation time for UE processing capability 1 assuming μ corresponds to the smallest SCS configuration between the SCS configuration of the PDCCH order and the SCS configuration of the corresponding PRACH transmission and is specified in Table 6.4-1 in 38.214 [9].

- $T_{\mathrm{BWPswitchDelay}} = 0$, $T_{\mathrm{switch}} = 0$, $\Delta_{\mathrm{RF/BB\ preparation}} = 0$

- $\Delta_{\mathrm{Delay}} = 0.5$ms

- $T_{\mathrm{SSB}} = 0$ for UE supporting *ltm-MAC-CE-JointTCI-r18* and/or *ltm-MAC-CE-SeparateTCI-r18*, otherwise $T_{\mathrm{SSB}} = T_{\mathrm{first-SSB_RACH}} + T_{\mathrm{SSB-proc}}$, where $T_{\mathrm{first-SSB_RACH}}$ is the time to first SSB after 1 slot from the end of the slot that UE receives PDCCH-order , and $T_{\mathrm{SSB-proc}}$ = 2 ms, which is the time for SSB processing.

During T2, interruption on Cell 1 UL shall not happen outside the overlapped slot to transmit PRACH and *N* symbols before and after the PRACH occasion as defined in clause 8.1 in 38.213 [8], where N=2. During T2, interruption on Cell 1 DL shall not occur outside the overlapped slot to transmit PRACH.

The test equipment will verify that the timing of PRACH transmission on Cell 2 is within (NTA + NTA_offset) ×Tc ± Te of the first detected path of DL SSB of Cell 2.

a. The N_{TA_offset} value (in T_c units) is 25600

b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in TS 38.133 [6] Table 7.1.2-1.

The rate of correct events observed during repeated tests shall be at least 90%.

6.3.2.4.2 NR SA FR1 PDCCH-ordered RACH to an inter-frequency candidate cell for LTM

6.3.2.4.2.1 Test Purpose

This test is to verify the requirement for the NR FR1-NR FR1 PDCCH-ordered RACH to an inter-frequency candidate cell in FR1 for LTM. This test is for UE supporting PDCCH-ordered RACH to an inter-frequency candidate cell, whose SSB is outside active BWPs of the UE.

6.3.2.4.2.2 Test applicability

This test applies to all NR UEs supporting NR LTM for MCG with RACH-less, L1-RSRP measurement and report, as well as interruptions caused by PDCCH order from Release 18 onwards, and with optional support for *rach-EarlyTA-Measurement-r18*. The test consists of 2 subtests, and the UE is required to pass one among them.

6.3.2.4.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.3.2.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.2.4.2.

6.3.2.4.2.4 Test description

6.3.2.4.2.4.1 Initial conditions

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency from the PCell. Test configurations are given in Table 6.3.2.4.2.4-1. Measurement gap patterns are configured in the test case and the SSB of Cell2 is outside the active BWP of Cell 1. The PCell is continuously scheduled during the whole test.

Table 6.3.2.4.2.4-1: Inter-frequency PDCCH-ordered RACH from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.2.4.2.4-2.

Table 6.3.2.4.2.4-2: Initial conditions for PDCCH-order RACH on Neighbour cell in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.4.2.4-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	No fader.		

1. Message contents are defined in clause 6.3.2.4.2.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell). Cell 2 is the NR FR1 neighbour cell.

6.3.2.4.2.4.2 Test procedure

This test case contains 2 tests and UE is required to pass one among Test 1, Test 2.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 6.3.2.4.2.5-1 and 6.3.2.4.2.5-2.
3. The UE shall establish a connection setup with SS Cell1, the random access procedure within the connection setup is used in the test.
4. The SS shall transmit an RRCReconfiguration message to configure event A3 triggered measurement reporting.
5. The UE shall transmit a MeasurementReport message triggered by Event A3.
6. The SS sends LTM-Candidate-r18 for Cell 2.
7. UE is configured with SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports on candidate cell (Cell 2) in PUCCH format 2, and UE shall report a valid L1-RSRP result of Cell 2.

If a UE supports *ltm-MAC-CE-JointTCI-r18*, it is only required to pass test 1. If a UE supports neither *ltm-MAC-CE-SeparateTCI-r18* nor *ltm-MAC-CE-JointTCI-r18*, it is only required to pass test 2.

8. Test 1: Joint TCI state configuration

   8.1. T1 starts when UE receiving candidate cell TCI state activation MAC CE to active CandidateTCI-State#1 for Cell 2.

   8.2. The start of T2 is the instant when DCI 1_0 PDCCH order to trigger PRACH transmission on Cell 2 is sent to the UE. The SS change the parameters according to T2 in Table 6.3.2.4.2.5-1 and 6.3.2.4.2.5-2. The SS shall schedule on cell 1 continuously for both UL and DL at available slots.

8.3. The UE shall transmit the PRACH preamble to Cell 2. If the UE transmits the PRACH preamble in the first available PRACH occasion after $N_{T,2}$ + 0.5ms + T_{SSB} (specified in clause 6.3.2.4.2.5) from the beginning of T2, then count a success for the event "PRACH occasion". Otherwise count a fail for the event "PRACH occasion".

8.4. If the timing of PRACH transmission on Cell 2 is within (N_{TA} + N_{TA_offset}) ×T_c ± T_e (specified in clause 6.3.2.4.2.5) of the first detected path of DL SSB of Cell 2, then count a success for the event "PRACH timing". Otherwise, count a fail for the event "PRACH timing".

8.5. During T2, if UL DTX is only observed by the SS within the overlapped slot to transmit PRACH and 2 symbols before and after the PRACH occasion, and DL DTX is only observed by the SS within the overlapped slot to transmit PRACH, then count a success for the event "Pcell DTX". Otherwise, count a fail for the event "Pcell DTX".

8.6. Repeat step 1-8 until a test verdict has been achieved.

9. Test 2: No candidate TCI state configurations

Test steps are the same as Step 8 with following exceptions:

T1 is skipped in Test 2. The SS shall not send any TCI state activation MAC CE to active TCI state of Cell 2.

Repeat step 1-7 and 9 until a test verdict has been achieved.

The rate of correct events observed during repeated tests shall be at least 90%.

Each of the events "PRACH occasion", "Pcell DTX" as well as "PRACH timing" are evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

6.3.2.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 6.3.2.4.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ and GAP NEEDED Table H.3.1-5 Table H.3.1-7 with conditions INTER-FREQ, SSB Index Table A.7.1-1 with PRACH.6 FR1 Table 9.1.2-1 in 38.133 pattern ID 1 Table H.3.12-1 with Condition L1-RSRP Table H.3.12-2 with Condition L1-RSRP Table H.3.12-3 for Cell 2 with Condition Candidate Config, TA_PDCCH-ORDER, TCI_INFO (Test 1) Table H.3.12-4 Table H.3.12-5 for Cell 1 Table H.3.12-6, Table H.3.12-7 and Table H.3.12-13 with SSB-Index = 0 Table H.3.12-8 Table H.3.12-9 for Cell 2 Table H.3.12-10 with Condition Joint and Early DL Sync for Test 1 Table H.3.12-10 with Condition Separate for Test 2 Table H.3.12-12 for Cell 2 PDCCH configuration: Table A.1.3.1-1 CCR 1.2 FDD for test 1, Table A.1.3.2-1 CCR 1.2 TDD for test 2 and Table A.1.3.2-2 CCR 2.4 FDD for test 3 with following exceptions: aggregation level 16, allocated RB 48.
Specific message contents exceptions for Cell 2	Table H.3.1-3 with condition INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.3.2.4.2.4.3-2: ReportConfigNR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A3			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-22	The actual value is field value * 0.5 dB	
}			
hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
}			
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	True		
}			
}			

Table 6.3.2.4.2.4.3-3: *MeasGapConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70 with condition GAP_FR1			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapFR1 CHOICE {			
setup SEQUENCE {			
mgrp	ms80		
}			
}			
}			

Table 6.3.2.4.2.4.3-4: CandidateTCI-State-r18

Derivation path: Table H.3.12-11			
Information Element	**Value/remark**	**Comment**	**Condition**
CandidateTCI-State-r18 ::= SEQUENCE {			
tci-StateId-r18	TCI-StateId-LTM(Id)		
qcl-Type1-r18 ::= SEQUENCE {			
referenceSignal-r18 CHOICE {			
ssb-Index	0		Id = 0 or 2
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4) specified in TS 38.508-1[14], table 7.3.1-11		Id = 1 or 3
}			
qcl-Type-r18	typeA		
}			
qcl-Type2-r18	Not present		
PathlossReferenceRS-Id-r18	Not present		Id = 2 or 3
	0		Id = 0 or 1
tag-Id-ptr-r18	Not present		
ul-powerControl-r18	Not present		
}			

6.3.2.4.2.5 Test requirement

Both PDCCH order RACH delay, transmit timing requirement and the interruption requirements are tested by using the parameters in table 6.3.2.4.2.5-1 and 6.3.2.4.2.5-2.

Table 6.3.2.4.2.5-1: General test parameters for Inter-frequency PDCCH-ordered RACH test from FR1 to FR1 from FR1 to FR1

Parameter		Unit	Value		Comment
			Test 1	Test 2	
Initial conditions	Active cell		Cell 1		
	Neighbouring cell		Cell 2		Cell 2 is the candidate cell
Final condition	Active cell		Cell 1		
A3-Offset		dB	-11		Original value is -6 dB, change to -11 dB after TT Analysis
Hysteresis		dB	0		
Time To Trigger		s	0		
Filter coefficient			0		L3 filtering is not used
Measurement gap periodicity		ms	80		
DRX			OFF		DRX is not used
Access Barring Information		-	Not Sent		No additional delays in random access procedure.
Time offset between cells			2 μs		RTD between cells is less than CP
reportQuantityRS-Indexes			Rsrp		
maxNrofRS-IndexesToReport			1		
includeBeamMeasurements			True		
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	80		Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1		Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1		
	spCellInclusion		N/A		
EarlyUL-SyncConfig	frequencyInfoUL		NR RF Channel Number 2		Cell 2
	PRACH configuration		FR1 PRACH configuration 6		
	bwp-GenericParameters		ULBWP.0.1		
	n-TimingAdvanceOffset	Tc	25600		
ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		DLorJoint TCI.State.0	N/A	As specified in TS 38.133 [6] clause A.3.16B. In test 1, CandidateTCI-State#1 is configured for early TCI state activation. In test 2, CandidateTCI-State#1 is configured for TCI state indication in cell switch command.
ltm-ConfigComplete			True		Candidate cell's configuration is complete configuration
T1		s	≤0.1		
T2		s	≤0.2		

Table 6.3.2.4.2.5-2: Cell specific test parameters for NR FR1-FR1 Inter-frequency PDCCH-ordered RACH test

Parameter	Unit	Cell 1	Cell 2

			T1-T2	T1-T2
NR RF Channel Number			1	2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR2.1 TDD	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR2.1 TDD	
TRS configuration for serving cell	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Patterns			OP.1	
SMTC Configuration			SMTC.1	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15	
	Config 3		30	
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15	
	Config 3		30	
PRACH configuration			FR1 PRACH configuration 6	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98	
	Config 3		-95	
$\hat{E}_s / I_{ot}$		dB	8	4
$\hat{E}_s / N_{oc}$		dB	8	4
SSB_RP	Config 1,2	dBm/SCS	-90	-94
	Config 3	dBm/SCS	-87	-91
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-64.59
	Config 3	dBm/	-55.31	-58.49

		38.16MHz		
Propagation condition		-	AWGN	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

The UE shall transmit the PRACH preamble to Cell 2 in the first available PRACH occasion after $N_{T,2}$ + 0.5ms + T_{SSB} from the beginning of time period T2. After transmitting PRACH on Cell 2, UE shall retune back to Cell 1.

NOTE: The PDCCH order RACH delay can be expressed as: $N_{T,2} + T_{\text{BWPswitchDelay}} + \Delta_{\text{Delay}} + T_{\text{switch}} + T_{\text{SSB}} + \Delta_{\text{RF/BB preparation}}$, where:

- $N_{T,2}$ is a time duration of N_2 symbols corresponding to a PUSCH preparation time for UE processing capability 1 assuming μ corresponds to the smallest SCS configuration between the SCS configuration of the PDCCH order and the SCS configuration of the corresponding PRACH transmission and is specified in Table 6.4-1 in 38.214 [9].
- $T_{\text{BWPswitchDelay}}$ = 0, T_{switch} = 0
- Δ_{Delay} = 0.5ms
- $\Delta_{\text{RF/BB preparation}}$ is defined in 6.2.2C
- T_{SSB} = 0 for UE supporting *ltm-MAC-CE-JointTCI-r18* and/or *ltm-MAC-CE-SeparateTCI-r18*, otherwise $T_{\text{SSB}} = T_{\text{first-SSB_RACH}} + T_{\text{SSB-proc}}$, where $T_{\text{first-SSB_RACH}}$is the time to first SSB occasion overlapped with MGL after 2ms and 1 slot from the end of the slot that UE receives PDCCH-order, and $T_{\text{SSB-proc}}$ = 2 ms, which is the time for SSB processing.

During T2, interruption on Cell 1 UL shall not happen outside ceil (Y/NR Slot length) +1 slots before and after PRACH transmission and the same slot of PRACH, where Y as reported in *pdcch-RACH-SwitchingTimeList-r18*.

The test equipment will verify that the timing of PRACH transmission on Cell 2 is within (NTA + NTA_offset) ×Tc ± Te of the first detected path of DL SSB of Cell 2.

a. The N_{TA_offset} value (in T_c units) is 25600

b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in TS 38.133 [6] Table 7.1.2-1.

The rate of correct events observed during repeated tests shall be at least 90%.

6.3.2.4.3 NR SA FR1 PDCCH-order RACH on neighbour cell without L1-RSRP measurement when RACH BW is within active UL BWP

6.3.2.4.3.1 Test Purpose

This test is to verify the requirement for PDCCH-order RACH on neighbour cell without L1-RSRP measurement in FR1 when RACH BW is within active UL BWP specified in TS 38.213 clause 8.1 [8] and UE transmit timing in TS 38.133 [6] clause 7.1 for UE supporting *rach-EarlyTA-Measurement-r18.*.

6.3.2.4.3.2 Test applicability

This test applies to all NR UEs supporting NR LTM for MCG with RACH-less and interruptions caused by PDCCH order from Release 18 onwards, and with optional support for *rach-EarlyTA-Measurement-r18*. The test consists of 3 subtests, and the UE is required to pass one among them.

6.3.2.4.3.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.3.2.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.2.4.3.

6.3.2.4.3.4 Test description

6.3.2.4.3.4.1 Initial conditions

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. Test configurations are given in table 6.3.2.4.3.4-1. No gap patterns are configured in the test case.

Table 6.3.2.4.3.4-1: PDCCH order RACH on Neighbour cell in FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Candidate cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Candidate cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Candidate: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.2.4.3.4-2.

Table 6.3.2.4.3.4-2: Initial conditions for PDCCH-order RACH on Neighbour cell in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.4.3.4-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	No fader.		

1. Message contents are defined in clause 6.3.2.4.3.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell). Cell 2 is the NR FR1 neighbour cell. The UE has to report L3 measurement results on Cell 2.

6.3.2.4.3.4.2 Test procedure

This test case contains 3 tests (Test 1, 2, and 3) and UE may have to pass one of the tests based on the defined conditions.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 6.3.2.4.3.5-1 and 6.3.2.4.3.5-2.
3. The UE shall establish a connection setup with SS Cell 1, the random access procedure within the connection setup is used in the test.
4. The SS shall transmit an RRCReconfiguration message to configure event A3 triggered measurement reporting.
5. The UE shall transmit a MeasurementReport message triggered by Event A3.
6. The SS sends LTM-Candidate-r18 for Cell 2.

If a UE supports *ltm-MAC-CE-JointTCI-r18*, it is only required to pass test 1. If a UE supports *ltm-MAC-CE-SeparateTCI-r18* and does not support *ltm-MAC-CE-JointTCI-r18*, it is only required to pass test 2. If a UE supports neither *ltm-MAC-CE-SeparateTCI-r18* nor *ltm-MAC-CE-JointTCI-r18*, it is only required to pass test 3.

7. Test 1: Joint TCI state configuration

   7.1. T1 starts from UE transmitting a L3 report of Cell 2.

   7.2. The SS sends TCI state activation MAC CE to active CandidateTCI-State#1 of Cell 2 no later than T1 + 100 ms.

   7.3. The start of T2 is the instant when DCI 1_0 PDCCH order to trigger PRACH transmission on Cell 2 is sent to the UE. The SS change the parameters according to T2 in Table 6.3.2.4.3.5-1 and 6.3.2.4.3.5-2. The SS shall schedule on cell 1 continuously for both UL and DL at available slots.

   7.4. The UE shall transmit the PRACH preamble to Cell 2. If the UE transmits the PRACH preamble in the first available PRACH occasion after $N_{T,2}$ + 0.5ms + T_{SSB} (specified in clause 6.3.2.x.3.5) from the beginning of T2, then count a success for the event "PRACH occasion". Otherwise count a fail for the event "PRACH occasion".

   7.5. If the timing of PRACH transmission on Cell 2 is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ (specified in clause 6.3.2.4.3.5) of the first detected path of DL SSB of Cell 2, then count a success for the event "PRACH timing". Otherwise, count a fail for the event "PRACH timing".

   7.6. During T2, if UL DTX is only observed by the SS within the overlapped slot to transmit PRACH and 2 symbols before and after the PRACH occasion, and DL DTX is only observed by the SS within the overlapped slot to transmit PRACH, then count a success for the event "Pcell DTX". Otherwise, count a fail for the event "Pcell DTX".

   7.7. Repeat step 1-7 until a test verdict has been achieved.

8. Test 2: Separate TCI state configuration

   Test steps are the same as step 7 with following exceptions:

   8.2. The SS sends TCI state activation MAC CE to active CandidateTCI-State#1 and CandidateTCI-UL-State #1 of Cell 2 no later than T1 + 100 ms.

   Repeat step 1-6 and 8 until a test verdict has been achieved.

9. Test 3: No candidate TCI state configurations

   Test steps are the same as Step 7 with following exceptions:

   The SS shall not send any TCI state activation MAC CE to active TCI state of Cell 2.

   Repeat step 1-6 and 9 until a test verdict has been achieved.

The rate of correct events observed during repeated tests shall be at least 90%.

Each of the events "PRACH occasion", "Pcell DTX" as well as "PRACH timing" are evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

6.3.2.4.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 6.3.2.4.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.1-7 with conditions INTRA-FREQ Table A.7.1-2 Table H.3.12-1 Table H.3.12-2 Table H.3.12-3 for Cell 2 with Condition Candidate Config, TA_PDCCH-ORDER, TCI_INFO (Test 1 and 2) Table H.3.12-6, Table H.3.12-7 and Table H.3.12-13 with SSB-Index = 0 Table H.3.12-9 for Cell 2 Table H.3.12-10 with Condition Joint and Early DL Sync for Test 1 Table H.3.12-10 with Condition Separate for Test 2 Table H.3.12-12 for Cell 2 PDCCH configuration: Table A.1.3.1-1 CCR 1.2 FDD for test 1, Table A.1.3.2-1 CCR 1.2 TDD for test 2 and Table A.1.3.2-2 CCR 2.4 FDD for test 3 with following exceptions: aggregation level 16, allocated RB 48.
Specific message contents exceptions for Cell 2	Table H.3.1-3 with condition INTRA-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.3.2.4.3.4.3-2: ReportConfigNR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A3			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-12	The actual value is field value * 0.5 dB	
}			
hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
}			
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	True		
}			
}			

Table 6.3.2.4.3.4.3-3: CandidateTCI-State-r18

Derivation path: Table H.3.12-11			
Information Element	**Value/remark**	**Comment**	**Condition**
CandidateTCI-State-r18 ::= SEQUENCE {			
tci-StateId-r18	TCI-StateId-LTM(Id)		
qcl-Type1-r18 ::= SEQUENCE {			
referenceSignal-r18 CHOICE {			
ssb-Index	0		Id = 0 or 2
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4) specified in TS 38.508-1[14], table 7.3.1-11		Id = 1 or 3
}			
qcl-Type-r18	typeA		
}			
qcl-Type2-r18	Not present		

PathlossReferenceRS-Id-r18	Not present		Id = 2 or 3
	0		Id = 0 or 1
tag-Id-ptr-r18	Not present		
ul-powerControl-r18	Not present		
}			

6.3.2.4.3.5 Test requirement

Both PDCCH order RACH delay, transmit timing requirement and the interruption requirements are tested by using the parameters in table 6.3.2.4.3.5-1 and 6.3.2.4.3.5-2.

Table 6.3.2.4.3.5-1: General test parameters for PDCCH order RACH in FR1

Parameter		Unit	Value			Comment
			Test 1	Test 2	Test 3	
Initial conditions	Active cell		Cell 1			
	Neighbouring cell		Cell 2			Cell 2 is the candidate cell
Final condition	Active cell		Cell 1			After transmitting PRACH on Cell 2, UE shall be back to Cell 1.
A3-Offset		dB	-6			
Hysteresis		dB	0			
Time To Trigger		ms	0			
Filter coefficient			0			L3 filtering is not used
DRX			OFF			DRX is not used
Time offset between cells			2 µs			RTD between cells is less than CP
deriveSSB-IndexFromCell			Enabled			
EarlyUL-SyncConfig	frequencyInfoUL		NR RF Channel Number 1			Same as Cell 1
	PRACH configuration		FR1 PRACH configuration 5			RACH bandwidth is within active UL BWP of Cell 1
	bwp-GenericParameters		ULBWP.0.1			
	n-TimingAdvanceOffset	Tc	25600			
ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		DlorJointTCI.State.0	DlorJointTCI.State.2	N/A	As specified in TS 38.133 [6] clause A.3.16B. Configured for early TCI state activation for test 1 and test 2.
Ltm-UL-TCI-StatesToAddModList	CandidateTCI-UL-State#1		N/A	UL TCI.State.0	N/A	As specified in TS 38.133 [6] clause A.3.16B. Configured for early TCI state activation for test 2.
Ltm-ConfigComplete			True			Candidate cell's configuration is complete configuration
T1		s	0.3			
T2		s	≤0.5			

Table 6.3.2.4.3.5-2: Cell specific test parameters for PDCCH order RACH test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			

	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	N/A		
	Config 2		SR.1.1 TDD	N/A		
	Config 3		SR.2.1 TDD	N/A		
CORESET Reference Channel	Config 1		CR.1.1 FDD	N/A		
	Config 2		CR.1.1 TDD	N/A		
	Config 3		CR.2.1 TDD	N/A		
CP length			Normal			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	-0.64	-0.64	-0.64	-0.64
$\hat{E}_s / N_{oc}$		dB	8	8	8	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-90	-90
	Config 3	dBm/SCS	-87	-87	-87	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.7	-58.7	-58.7	-58.7
	Config 3	dBm/ 38.16MHz	-52.6	-52.6	-52.6	-52.6
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall transmit the PRACH preamble to Cell 2 in the first available PRACH occasion after $N_{T,2}$ + 0.5ms + T_{SSB} from the beginning of time period T2. After transmitting PRACH on Cell 2, UE shall retune back to Cell 1.

NOTE: The PDCCH order RACH delay can be expressed as: $N_{T,2} + T_{\text{BWPswitchDelay}} + \Delta_{\text{Delay}} + T_{\text{switch}} + T_{\text{SSB}} + \Delta_{\text{RF/BB preparation}}$, where:

- $N_{T,2}$ is a time duration of N_2 symbols corresponding to a PUSCH preparation time for UE processing capability 1 assuming μ corresponds to the smallest SCS configuration between the SCS configuration of the PDCCH order and the SCS configuration of the corresponding PRACH transmission and is specified in Table 6.4-1 in 38.214 [9].

- $T_{\text{BWPswitchDelay}} = 0$, $T_{\text{switch}} = 0$, $\Delta_{\text{RF/BB preparation}} = 0$

- $\Delta_{\text{Delay}} = 0.5$ms

- T_{SSB} is the time to first SSB occasion, after 1slot from the end of the slot of the PDCCH plus 2ms (SSB processing time).

During T2, interruption on Cell 1 UL shall not happen outside the overlapped slot to transmit PRACH and *N* symbols before and after the PRACH occasion as defined in clause 8.1 in 38.213 [8], where N=2. During T2, interruption on Cell 1 DL shall not occur outside the overlapped slot to transmit PRACH.

The test equipment will verify that the timing of PRACH transmission on Cell 2 is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB of Cell 2.

a. The N_{TA_offset} value (in T_c units) is 25600

b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in TS 38.133 [6] Table 7.1.2-1.

The rate of correct events observed during repeated tests shall be at least 90%.

6.3.3 Conditional handover

6.3.3.0 Minimum conformance requirements

6.3.3.0.1 Minimum conformance requirements for NR FR1 intra-frequency conditional handover

[TS 38.133, clause 6.1.4.2.1]

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [13].

When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

Where:

T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover.

- a condition exists at the measurement reference point which will trigger the conditional handover, or

- a condition exists at the measurement reference point which will trigger the NES-based conditional handover

$T_{measure}$ is the measurements time stated in TS 38.133 [6] clause 6.1.4.2.2.

$T_{CHO_execution}$ is the conditional execution preparation time in TS 38.133 [6] clause 6.1.4.2.3.

$T_{interrupt}$ is the interruption time stated in TS 38.133 [6] clause 6.1.4.2.4.

The NES-based conditional handover delay requirements shall apply if UE receives a RRC message implying NES-based conditional handover before receiving the NES indication in DCI 2-9 command.

UE is not expected to receive a NES indication in DCI 2-9 command before receiving a RRC message implying NES-based conditional handover. When UE receives a RRC message implying NES-based conditional handover but no NES indication in DCI 2-9 command, no NES-based conditional handover requirement is applied. The NES indication is specified in clause 5.5.4 in TS 38.331.

[TS 38.133, clause 6.1.4.2.2]

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a handover to a target cell and interruption time starts.

For conditional intra-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify_intra_without_index}$ defined in clause 9.2.5.1 or clause 9.2.6.2.

For NES-based conditional intra-frequency handover:

- If UE successfully decodes DCI 2-9 command earlier than the time at the end of $T_{Event_DU} + T_{identify_intra_with_index}$ or $T_{Event_DU} + T_{identify_intra_without_index}$, then the measurement time delay equal to $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$

- If UE successfully decodes DCI 2-9 command later than the time at the end of $T_{Event_DU} + T_{identify_intra_with_index}$ or $T_{Event_DU} + T_{identify_intra_without_index}$, and the condition of NES-based CHO keeps existing till UE receiving the DCI 2-9 command, then the measurement time delay equals to the time from the end of T_{event_DU} until UE successfully decodes DCI 2-9 command.When TTT or L3 filtering is used an additional delay can be expected.

- If UE successfully decodes DCI 2-9 command later than the time at the end of $T_{Event_DU} + T_{identify_intra_with_index}$ or $T_{Event_DU} + T_{identify_intra_without_index}$, and the condition of NES-based CHO is not met when receiving the DCI 2-9 command, then the measurement time delay equals to the time span from the end of T_{Event_DU} until a condition keeps existing for $T_{SSB\ measurement\ period_intra}$ which will immediately trigger the NES-based conditional handover after DCI 2-9.A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover. If a cell which has been detectable at least for the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover becomes undetectable for a period and then the cell becomes detectable again and triggers a handover, the measurement time delay shall be less than $T_{SSB_measurement_period_intra}$ or $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while the measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

[TS 38.133, clause 6.1.4.2.3]

$T_{CHO_execution}$ is the UE execution preparation time for conditional handover.

For conditional handover, it starts after UE realizes the condition of CHO is met and identity of the target cell is determined.

For NES-based conditional handover,

- It starts after UE realizes the condition of CHO is met and identity of the target cell is determined provided that UE has already successfully decoded DCI 2-9.

- Otherwise, it starts after UE successfully decodes DCI 2-9.

And $T_{CHO_execution}$ can be up to 10ms.[TS 38.133, clause 6.1.4.2.4]

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional conditional handover, the measurment time shall be less than

$$T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin}\ \text{ms}$$

Where:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [8]

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cellin the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [13] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.[TS 38.133, clause 9.2.2]

[TS 38.133, clause 9.2.5.1]

The UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_without_index}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}) \text{ ms}$$

$$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in TS 38.133 [6] Table 9.2.5.1-1.

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in TS 38.133 [6] Table 9.2.5.1-3.

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in TS 38.133[6] Table 9.2.5.2-1.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined

according to $CSSF_{outside_gap,i}$ in TS 38.133 [6] clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps.

When intra-frequency SMTC is fully non overlapping with measurement gaps or intra-frequency SMTC is fully overlapping with MGs, Kp=1

Table 9.2.5.1-1: Time period for PSS/SSS detection, (Frequency range FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(M2 [Note 2]x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms;,otherwise M2=1. NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[intraRAT-MeasurementEnhancement-r16]* on measurements of the	

primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.

Table 9.2.5.1-3: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil (M2 [Note 2] x 3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms;,otherwise M2=1	
NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[intraRAT-MeasurementEnhancement-r16]* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	

[TS 38.133, clause 9.2.5.2]

The measurement period for intra-frequency measurements without gaps is as shown in TS 38.133 [6] Table 9.2.5.2-1.

Table 9.2.5.2-1: Measurement period for intra-frequency measurements without gaps(FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

6.3.3.0.2 Minimum conformance requirements for NR FR1 inter-frequency conditional handover

[TS 38.133, clause 6.1.4.2.1]

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [13].

When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

Where:

T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover. - a condition exists at the measurement reference point which will trigger the conditional handover, or

- a condition exists at the measurement reference point which will trigger the NES-based conditional handover

$T_{measure}$ is the measurements time stated in TS 38.133 [6] clause 6.1.4.2.2.

$T_{CHO_execution}$ is the conditional execution preparation time in TS 38.133 [6] clause 6.1.4.2.3.

$T_{interrupt}$ is the interruption time stated in TS 38.133 [6] clause 6.1.4.2.4.

The NES-based conditional handover delay requirements shall apply if UE receives a RRC message implying NES-based conditional handover before receiving the NES indication in DCI 2-9 command.

UE is not expected to receive a NES indication in DCI 2-9 command before receiving a RRC message implying NES-based conditional handover. When UE receives a RRC message implying NES-based conditional handover but no NES indication in DCI 2-9 command, no NES-based conditional handover requirement is applied. The NES indication is specified in clause 5.5.4 in TS 38.331.

[TS 38.133, clause 6.1.4.2.2]

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a handover to a target cell and interruption time starts.

For inter-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$ defined in clause 9.3.4.

For NES-based conditional inter-frequency handover:

- If UE successfully decodes DCI 2-9 command earlier than the time at the end of $T_{Event_DU} + T_{identify_inter_with_index}$ or $T_{Event_DU} + T_{identify_inter_without_index}$, and the condition of NES-based CHO keeps existing till UE receiving the DCI 2-9 command, then the measurement time delay equal to $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$
- If UE successfully decodes DCI 2-9 command later than the time at the end of $T_{Event_DU} + T_{identify_inter_with_index}$ or $T_{Event_DU} + T_{identify_inter_without_index}$, then the measurement time delay equals to the time from the end of T_{event_DU} until UE successfully decodes DCI 2-9 command.

- If UE successfully decodes DCI 2-9 command later than the time at the end of $T_{Event_DU} + T_{identify_inter_with_index}$ or $T_{Event_DU} + T_{identify_inter_without_index}$, and the condition of NES-based CHO is not met when receiving the DCI 2-9 command, then the measurement time delay equals to the time span from the end of T_{Event_DU} until a condition keeps existing for $T_{SSB\ measurement\ period_inter}$ which will immediately trigger the NES-based conditional handover after DCI 2-9.When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover. If a cell which has been detectable at least for the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover becomes undetectable for a period and then the cell becomes detectable again and triggers a handover, the measurement time delay shall be less than $T_{SSB_measurement_period_intra}$ or $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while the measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

[TS 38.133, clause 6.1.4.2.3]

$T_{CHO_execution}$ is the UE execution preparation time for conditional handover.

For conditional handover, it starts after UE realizes the condition of CHO is met and identity of the target cell is determined.

For NES-based conditional handover,

- It starts after UE realizes the condition of CHO is met and identity of the target cell is determined provided that UE has already successfully decoded DCI 2-9.
- Otherwise, it starts after UE successfully decodes DCI 2-9.

And $T_{CHO_execution}$ can be up to 10ms.[TS 38.133, clause 6.1.4.2.4]

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional conditional handover, the measurment time shall be less than

$$T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin}\ ms$$

Where:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [8]

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cellin the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [13] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

[TS 38.133, clause 9.3.2]

The requirements in clause 9.3 apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] clauses 10.1.4 for FR1, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.3 for a corresponding Band.

[TS 38.133, clause 9.3.4]

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index.}$

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter})\ ms$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter})\ ms$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in 38.133 [6] Table 9.3.4-1.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in 38.133 [6] Table 9.3.4-3.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in 38.133 [6] Table 9.3.5-1.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps.

Table 9.3.4-1: Time period for PSS/SSS detection (Frequency range FR1)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	$Max(600ms, 8 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(600ms, Ceil(8*1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$

DRX cycle > 320ms	$8 \times$ DRX cycle $\times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 9.3.4-3: Time period for time index detection (Frequency range FR1)

Condition NOTE1,2	$T_{SSB_time_index_inter}$
No DRX	$Max(120ms, 3 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(120ms, Ceil(3 \times 1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$3 \times$ DRX cycle $\times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

[TS 38.133, clause 9.3.5]

When measurement gaps are provided for inter frequency measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in TS 38.133 [6] clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 9.3.5-1 and 9.3.5-2:

Table 9.3.5-1: Measurement period for inter-frequency measurements with gaps (Frequency FR1)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	$Max(200ms, 8 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(8 \times 1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$8 \times$ DRX cycle $\times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

6.3.3.0.3 Minimum conformance requirements for SA NR-DC FR1 Conditional handover including target MCG and target SCG

[TS 38.133, clause 6.1.6.1]

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [13].

This clause defines requirements for the delay within which the UE shall be able to conditional handover from NR cell to NR cell and changeNR PSCell in the meantime.

When the UE receives a RRC message implying conditional handover with PSCell,

- The UE shall be ready to start the transmission of the new uplink PRACH channel of the target PCell within $D_{CHOwithPSCell_PCell}$ ms from the end of the last TTI containing the RRC command, and
- The UE shall be capable of transmitting PRACH preamble towards the target PSCell no later than $D_{CHOwithPSCell_PSCell}$ ms from the end of the last TTI containing the RRC command.

$D_{CHOwithPSCell_PCell} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$

$D_{CHOwithPSCell_PSCell}$ is the PSCell change delay as stated below.

Where:

T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [2].

T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover.

$T_{measure}$ is the measurements time stated in clause 6.1.4.4.2 of TS 38.133.

$T_{CHO_execution}$ is the conditional execution preparation time in clause 6.1.4.4.3 of TS 38.133.

$T_{interrupt}$ is the interruption time as stated in clause below.

[TS 38.133, clause 6.1.6.1.1]

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional conditional handover, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

- T_{IU}, T_{Δ} and T_{margin} are the same as defined in clause 6.1.4.4.4 of TS 38.133.
- $T_{processing}$ is the SW processing time needed by UE, including RF warm up period.

  For FR1-FR1 NR-DC to FR1-FR1 NR-DC, $T_{processing}$ = 30 ms if SMTC of the target unknown PSCell is configured in *targetcellSMTC-SCG-r16* but not configured in *reconfigurationWithSync*. Otherwise, $T_{processing}$ = 25 ms.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2.5 for intra-frequency handover and Clause 9.3.4 for inter-frequency handover.

[TS 38.133, clause 6.1.6.1.2]

The requirements in this section shall apply for PSCell change during conditional handover with PSCell from NR DC to NR-DC.

When conditional handover with PSCell from NR-DC to NR-DC is commanded, the PSCell change time shall be less than $D_{CHOwithPSCell_PSCell}$:

- $D_{CHOwithPSCell_PSCell} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{CHO_execution} + T_{processing} + T_{search_PCell_Conditional} + T_{search_PSCell} + T_{\Delta_PSCell} + T_{PSCell_DU} + 2$ ms

Where:

- T_{RRC_delay}, T_{Event_DU}, $T_{measure}$, $T_{CHO_execution}$ are the same as defined above.
- $T_{processing}$ is the same as defined above. T_{search_PSCell} and T_{PSCell_DU} are the same as defined in clause 8.9.2. - $T_{search_PCell_Conditional}$ is the time for obtaining the timing reference of target PCell. If SMTC of the target unknown PSCell is configured in *targetcellSMTC-SCG-r16* but not configured in *reconfigurationWithSync*, $T_{search_PCell_Conditional} = T_{\Delta} + T_{margin}$, where T_{Δ} and T_{margin} are specified above Otherwise, $T_{search_PCell_Conditional}$ = 0 ms.
- T_{Δ_PSCell} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ_PSCell} = 1*Trs ms for a known or unknown PSCell.
- T_{PSCell_DU} is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{PSCell_DU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

The T_{rs} definition from clause 8.9.2 is modified as following for requirements in this section:

- T_{rs} is the SMTC periodicity of the target NR cell if target PSCell is unknown and SMTC configuration of target unknown PSCell is present in either *targetcellSMTC-SCG-r16* or *reconfigurationWithSync*, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, Trs is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not

provided SMTC configuration or measurement object on this frequency, the requirement in this section is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

PSCell known and unknown condition is as defined in clause 8.9.2.

[TS 38.133, clause 6.1.4.2.4]

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional conditional handover, the measurment time shall be less than

$$T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [8]

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cellin the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [13] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

6.3.3.0.4 Minimum conformance requirements for NR-DC SA FR1 Conditional handover including target MCG and candidate SCG

[TS 38.133, clause 6.1.7.1]

The purpose of NR Conditional handover including target MCG and candidate SCG for CPC is to change the NR PCell to another NR cell and change the PSCell along with PCell handover. The requirements in this clause are applicable to:

- FR1-FR1 NR-DC to FR1-FR1 NR-DC,

When the CHO execution condition is met but no CPC execution condition is met, and the UE has an available complementary CHO-only configuration, the UE executes CHO without CPC and the delay requirements for CHO defined in section 6.1.4 of TS 38.133[6] shall apply.

When the CHO execution condition is met but no CPC execution condition is met, and the UE has Rel-17 complementary CHO with SCG configuration, the UE executes Rel-17 CHO with SCG execution and the delay requirements for CHO with SCG defined in section 6.1.6 apply.

When the UE receives a RRC message implying conditional handover including target MCG and candidate SCG for CPC,

- The UE shall be ready to start the transmission of the new uplink PRACH channel of the target PCell within $D_{CHOwithCPC_PCell}$ ms from the end of the last TTI containing the RRC command, and
- The UE shall be capable of transmitting PRACH preamble towards the target PSCell no later than $D_{CHOwithCPC_PSCell}$ ms from the end of the last TTI containing the RRC command.

Where:

- $D_{CHOwithCPC_PCell}$ is the PCell conditional handover delay stated below.

- $D_{CHOwithCPC_PSCell}$ is the PSCell conditional change delay stated below.

[TS 38.133, clause 6.1.7.1.1 PCell conditional handover delay]

$D_{CHOwithCPC_PCell} = T_{RRC_delay} + T_{Event_DU} + \max(T_{measure_PCell}, T_{measure_PSCell}) + T_{UE_preparation} + T_{processing} + T_{\Delta_PCell} + T_{PCell_DU} + 2$ ms

- T_{RRC_delay} is the RRC procedure delay defined in clause 12 in TS 38.331 [13] for processing the RRC command.

- T_{Event_DU} in PCell and PSCell handover delay requirement is the delay uncertainty which is the time from when the UE successfully decodes the RRC command for CHO including target MCG and candidate SCG for CPC until conditions exist at the measurement reference point which will trigger the CHO and CPC.

- $T_{measure_PCell}$ is the measurements time stated in clause 6.1.7.1.1.1.

- $T_{measure_PSCell}$ is the measurements time stated in clause 6.1.7.1.2.1.

- $T_{UE_preparation}$ is the UE preparation time for conditional handover with conditional PSCell change, and starts at simultaneous execution of PCell handover and PSCell change to a target PCell and a target PSCell respectively after UE realizes the conditions of conditional PCell handover and conditional PSCell change are met and identities of the target PCell and PSCell are determined. $T_{UE_preparation}$ is up to 10ms.

- $T_{processing}$ is the SW processing time needed by UE, including RF warm up period.

  For FR1-FR1 NR-DC to FR1-FR1 NR-DC, $T_{processing}$ = 25 ms.

- T_{Δ_PCell} is time for fine time tracking and acquiring full timing information of the target PCell. $T_{\Delta_PCell} = 1*T_{rs}$ ms.

- T_{rs} is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in handover message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs} = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

- T_{PCell_DU} is the delay uncertainty in acquiring the first available PRACH occasion in the PCell. T_{PCell_DU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

[TS 38.133, clause 6.1.7.1.1.1 Measurement time]

The measurement time delay for PCell is defined from the end of T_{Event_DU} until UE realizes the condition of PCell handover is met and identity of new PCell is determined.

For intra-frequency PCell handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify_intra_without_index}$ defined in clause 9.2.5.1 or clause 9.2.6.2.

For inter-frequency PCell handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ defined in clause 9.3.4. When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency PCell handover or the time period $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ for inter-frequency PCell handover. If a cell, which has been detectable at least for the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency PCell handover or the time period $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ for inter-frequency PCell handover, becomes undetectable for a period and then the cell becomes detectable again and triggers a PCell handover, the measurement time delay shall be less than $T_{SSB_measurement_period_intra}$ or $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

[TS 38.133, clause 6.1.7.1.2 PSCell conditional change delay]

$D_{CHOwithCPC_PSCell} = T_{RRC_delay} + T_{Event_DU} + \max(T_{measure_PCell}, T_{measure_PSCell}) + T_{UE_preparation} + T_{processing} + T_{\Delta_PSCell} + T_{PSCell_DU} + 2$ ms

- T_{RRC_delay} is the RRC procedure delay defined in clause 12 in TS 38.331 [13] for processing the RRC command.

- T_{Event_DU} in PCell and PSCell handover delay requirement is the delay uncertainty which is the time from when the UE successfully decodes the RRC command for CHO including target MCG and candidate SCG for CPC until conditions exist at the measurement reference point which will trigger the CHO and CPC.

- $T_{measure_PCell}$ is the measurements time stated in clause 6.1.7.1.1.1.

- $T_{measure_PSCell}$ is the measurements time stated in clause 6.1.7.1.2.1.

- $T_{UE_preparation}$ is the UE preparation time for conditional handover with conditional PSCell change, and starts at simultaneous execution of PCell handover and PSCell change to a target PCell and a target PSCell respectively after UE realizes the conditions of conditional PCell handover and conditional PSCell change are met and identities of the target PCell and PSCell are determined. $T_{UE_preparation}$ is up to 10ms.

- $T_{processing}$ is as specified above.

- T_{Δ_PSCell} is time for fine time tracking and acquiring full timing information of the target PSCell. $T_{\Delta_PSCell} = 1*T_{rs}$ ms.

  - T_{rs} is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs} = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

- T_{PSCell_DU} is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{PSCell_DU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

[TS 38.133, clause 6.1.7.1.2.1 Measurement Time]

The measurement time delay for PSCell is defined from the end of T_{Event_DU} until UE realizes the condition of PSCell change is met and identity of new PSCell is determined.

For intra-frequency PSCell change, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify_intra_without_index}$ defined in clause 9.2.5.1 or clause 9.2.6.2.

For inter-frequency PSCell change, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ defined in clause 9.3.4. When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency PCell handover or the time period $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ for inter-frequency PCell handover. If a cell, which has been detectable at least for the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency PCell handover or the time period $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ for inter-frequency PCell handover, becomes undetectable for a period and then the cell becomes detectable again and triggers a PCell handover, the measurement time delay shall be less than $T_{SSB_measurement_period_intra}$ or $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

6.3.3.1 NR SA FR1 conditional handover

6.3.3.1.1 Test purpose

To verify the requirement for the NR FR1 intra-frequency conditional handover requirements specified in TS 38.133 [6] clause 6.1.4.2

6.3.3.1.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and supporting conditional handover.

6.3.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.3.1.

6.3.3.1.4 Test description

6.3.3.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.3.1.4.1-1.

Table 6.3.3.1.4.1-1: NR SA FR1 conditional handover test configurations

Config	Description
6.3.3.1-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.3.1-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.3.1-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.3.1.4.1-2

Table 6.3.3.1.4.1-2: Initial conditions for NR SA FR1 conditional handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.3.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.3.1.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.3.3.1.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.3.1.4.1-3: General test parameters NR SA FR1 conditional handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset in condition		dB	-1	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
PRACH configuration index			FR1 PRACH configuration 1	As specified in table Table 6.3.3.2-3 in TS 38.211 [7]
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤2	

6.3.3.1.4.2 Test procedure

The test scenario comprises of 1 NR carrier and two cells, Cell 1 and Cell 2, on this carrier. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 6.3.3.1.4.1-3 and 6.3.3.1.5-1 respectively. No measurement gap is configured in the test case.

The test consists of two successive time periods, with time durations of T1 and T2 respectively.

At the start of time duration T1, the UE may not have any timing information of cell 2. The UE is configured with a condition implying handover to Cell 2 at a time earlier than T_{RRC} ms before the beginning of T2. No interruption shall be observed in time period T1, where

- T_{RRC} = 10ms, is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

From start of T2, the Cell 2 becomes detectable and handover condition is satisfied. During T2, the UE performs measurement on Cell 2 and evaluates the execution condition, and starts handover procedure when execution condition is satisifed. The UE shall sent PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the start of T2. The Interruption length $T_{interrupt}$ shall also be verified in T2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 6.3.3.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure CHO execution condition for the UE.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.3.1.5-1. T2 starts.

7. If

   a) the UE transmits the PRACH preambles to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the beginning of time period T2,

   and

   b) no longer than X consecutive ACK/NACK DTXs are observed by the SS from the start of T2 to the instant the UE transmits the first PRACH preamble, where

      - $X = T_{interrupt} + k_1$ for test configuration 6.3.3.1-1
      - $X = T_{interrupt}$ for test configuration 6.3.3.1-2
      - $X = 2 \cdot T_{interrupt}$ for test configuration 6.3.3.1-3.

   then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

9. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:Table 6.3.3.1.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 6.3.3.1.4.3-2	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
conditionalReconfiguration-r16	ConditionalReconfiguration	Table 6.3.3.1.4.3-5	
}			
}			
}			
}			
}			
}			
}			

Table 6.3.3.1.4.3-2: MeasConfig (Table 6.3.3.1.4.3-1)

Derivation Path: Table H.3.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofObjectId)) OF MeasObjectToAddMod {	1 entry		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR	Table 6.3.3.1.4.3-3	
}			
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 6.3.3.1.4.3-4	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	1 entry		
MeasIdToAddMod[1] SEQUENCE {			
measId	1		
measObjectId	1		
reportConfigId	1		
}			
}			
quantityConfig	QuantityConfig specified in Table H.3.1-5		
}			

Table 6.3.3.1.4.3-3: MeasObjectNR (Table 6.3.3.1.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR for PCell		
smtc1	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 6.3.3.1.4.3-4: ReportConfigNR (Table 6.3.3.1.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
condTriggerConfig SEQUENCE {			
condEventId CHOICE {			
condEventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-2	actuall value = -2*0.5 = -1dB	
}			
hysteresis	0	actuall value = 0*0.5 = 0dB	
timeToTrigger	ms0		
}			
}			
}			
}			
}			

Table 6.3.3.1.4.3-5: ConditionalReconfiguration (Table 6.3.3.1.4.3-1)

Derivation Path: TS 38.508-1[14], Table 4.6.3-25D			
Information Element	**Value/remark**	**Comment**	**Condition**
ConditionalReconfiguration-r16::= SEQUENCE {			
condReconfigToAddModList-r16 SEQUENCE (SIZE (1.. maxNrofCondCells-r16)) OF CondReconfigToAddMod-r16 {	1 entry		
CondReconfigToAddMod-r16 [1] SEQUENCE {		entry 1	
condReconfigId-r16	1		
condExecutionCond-r16 SEQUENCE (SIZE (1..2)) OF MeasId {	1 entry		
MeasId[1]	1	The MeasId configured in Table 6.3.3.1.4.3-2	
}			
condRRCReconfig-r16	OCTET STRING (CONTAINING RRCReconfiguration Specified in Table 4.8.1-1A with condition RBConfig_NoKeyChange)		
}			

}			
}			

6.3.3.1.5 Test requirements

Table 6.3.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.3.1.5-1: Cell specific test parameters for NR SA FR1 conditional handover

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-2.41	-Infinity	1.36
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	10

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-88
	Config 3	dBm/SCS	-87	-87	-Infinity	-85
Io[Note3]	Config 1,2	dBm/ 9.36MHz	-61.41	-57.67	-61.41	-57.67
	Config 3	dBm/ 38.16MHz	-55.31	-50.56	-55.31	-50.56
Propagation condition			AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The rate of correct handovers observed during repeated tests shall be at least 90%.

The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ from the start of T2. where:

- $T_{measure}$ = 800 ms, is the measurements time specified in TS 38.133 [6] clause 6.1.4.2.2.
- $T_{CHO_execution}$ = 10 ms, is the conditional execution preparation time specified in TS 38.133 [6] clause 6.1.4.2.2.
- $T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin}$ ms, is the interruption time specified in TS 38.133 [6] 6.1.4.2.4.
  - $T_{processing}$ = 20 ms, is time for UE processing;
  - T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell;
  - T_{Δ} = 20 ms, is time for fine time tracking and acquiring full timing information of the target cell;
  - T_{margin} = 2 ms, is time for SSB post-processing.

This gives a total of 872 ms

The interruption during T2 shall not exceeed $T_{interrupt}$ = 62ms.

6.3.3.2 NR SA FR1-FR1 conditional handover

6.3.3.2.1 Test purpose

To verify the requirement for the NR conditional FR1-NR FR1 inter-frequency conditional handover requirements specified in TS 38.133 [6] clause 6.1.4.2.

6.3.3.2.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and supporting conditional handover.

6.3.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.3.2.

6.3.3.2.4 Test description

6.3.3.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.3.2.4.1-1.

Table 6.3.3.2.4.1-1: NR SA FR1-FR1 conditional handover test configurations

Config	Description
6.3.3.2-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.3.2-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.3.2-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.3.2.4.1-2

Table 6.3.3.2.4.1-2: Initial conditions for NR SA FR1-FR1 conditional handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.3.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.3.2.4.3.

2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Table 6.3.3.2.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.3.2.4.1-3: General test parameters NR SA FR1-FR1 conditional handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset in handover condition		dB	-4	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤2	

6.3.3.2.4.2 Test procedure

The test scenario comprises of 2 NR carrier and two cells, Cell 1 and Cell 2, on each carrier respectively. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 6.3.3.2.4.1-3 and 6.3.3.2.5-1 respectively. Measurement gap (gap pattern #0) is configured in the test case.

The test consists of two successive time periods, with time durations of T1 and T2 respectively.

At the start of time duration T1, the UE may not have any timing information of cell 2. The UE is configured with a condition implying handover to Cell 2 at a time earlier than T_{RRC} ms before the beginning of T2. No interruption shall be observed in time period T1, where

- T_{RRC} = 10ms, is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

From start of T2, the Cell 2 becomes detectable and handover condition is satisfied. During T2, the UE performs measurement on Cell 2 and evaluates the execution condition, and starts handover procedure when execution condition

is satisifed. The UE shall sent PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the start of T2. The Interruption length $T_{interrupt}$ shall also be verified in T2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 6.3.3.2.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure CHO execution condition and measurement gap pattern #0 for the UE.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.3.2.5-1. T2 starts.

7. If

   c) the UE transmits the PRACH preambles to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the beginning of time period T2,

   and

   d) no longer than X consecutive ACK/NACK DTXs are observed by the SS from the start of T2 to the instant the UE transmits the first PRACH preamble, where

   - $X = T_{interrupt} + k_1$ for test configuration 6.3.3.2-1
   - $X = T_{interrupt}$ for test configuration 6.3.3.2-2
   - $X = 2 \cdot T_{interrupt}$ for test configuration 6.3.3.2-3.

   then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

9. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.3.3.2.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 6.3.3.2.4.3-2	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			

conditionalReconfiguration-r16	ConditionalReconfiguration	Table 6.3.3.2.4.3-6	
}			
}			
}			
}			
}			
}			
}			

Table 6.3.3.2.4.3-2: MeasConfig (Table 6.3.3.2.4.3-1)

Derivation Path: Table H.3.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofObjectId)) OF MeasObjectToAddMod {	2 entry		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR-f1	Table 6.3.3.2.4.3-3	
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		entry 2	
measObjectId	2		
measObject CHOICE {			
measObjectNR	MeasObjectNR-f2	Table 6.3.3.2.4.3-4	
}			
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 6.3.3.2.4.3-5	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	1 entry		
MeasIdToAddMod[1] SEQUENCE {			
measId	1		
measObjectId	2		
reportConfigId	1		
}			
}			
measGapConfig	MeasGapConfig specified in Table H.3.1-6 with condition gapUE and Pattern #0		
quantityConfig	QuantityConfig specified in Table H.3.1-5		
}			

Table 6.3.3.2.4.3-3: MeasObjectNR-f1 (Table 6.3.3.2.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			

ssbFrequency	ARFCN-ValueNR for Cell 1		
smtc1	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 6.3.3.2.4.3-4: MeasObjectNR-f2 (Table 6.3.3.2.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR for Cell 2		
smtc1	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 6.3.3.2.4.3-5: ReportConfigNR (Table 6.3.3.2.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
condTriggerConfig SEQUENCE {			
condEventId CHOICE {			
condEventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-8	actuall value = -8*0.5 = -4dB	
}			
hysteresis	0	actuall value = 0*0.5 = 0dB	
timeToTrigger	ms0		
}			
}			
}			
}			
}			

Table 6.3.3.2.4.3-6: ConditionalReconfiguration (Table 6.3.3.2.4.3-1)

Derivation Path: TS 38.508-1[14], Table 4.6.3-25D			
Information Element	**Value/remark**	**Comment**	**Condition**
ConditionalReconfiguration-r16::= SEQUENCE {			
condReconfigToAddModList-r16 SEQUENCE (SIZE (1.. maxNrofCondCells-r16)) OF CondReconfigToAddMod-r16 {	1 entry		
CondReconfigToAddMod-r16 [1] SEQUENCE {		entry 1	
condReconfigId-r16	1		

condExecutionCond-r16 SEQUENCE (SIZE (1..2)) OF MeasId {	1 entry		
MeasId[1]	1	The MeasId configured in Table 6.3.3.2.4.3-2	
}			
condRRCReconfig-r16	OCTET STRING (CONTAINING RRCReconfiguration Specified in Table 4.8.1-1A with condition RBConfig_NoKeyChange)		
}			
}			
}			

6.3.3.2.5 Test requirements

Table 6.3.3.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.3.2.5-1: Cell specific test parameters for NR SA FR1-FR1 conditional handover

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
Gap pattern ID			gp0			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98		-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	6.70
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	6.70
SSB_RP	Config 1,2	dBm/SCS	-94	-94	-Infinity	-91.30
	Config 3	dBm/SCS	-91	-91	-Infinity	-88.30
Io Note3	Config 1,2	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-62.51
	Config 3	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-56.40
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The rate of correct handovers observed during repeated tests shall be at least 90%.

The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ from the start of T2. where:

- $T_{measure}$ = 920 ms, is the measurements time specified in TS 38.133 [6] clause 6.1.4.2.2.
- $T_{CHO_execution}$ = 10 ms, is the conditional execution preparation time specified in TS 38.133 [6] clause 6.1.4.2.2.
- $T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin}$ ms, is the interruption time specified in TS 38.133 [6] 6.1.4.2.4.
  - $T_{processing}$ = 20 ms, is time for UE processing;
  - T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell;
  - T_{Δ} = 20 ms, is time for fine time tracking and acquiring full timing information of the target cell;
  - T_{margin} = 2 ms, is time for SSB post-processing.

This gives a total of 992 ms

The interruption during T2 shall not exceed $T_{interrupt}$ = 62ms.

6.3.3.3 NR SA FR1 conditional handover including target MCG and target SCG

Editor's Note: This test case is incomplete in following aspects:

- Message contents are TBD.
- Test applicability is missing

- TT analysis is missing.

6.3.3.3.1 Test purpose

The purpose of this test is to verify that UE can make correct NR-DC to NR-DC conditional handover including target MCG in FR1 and target SCG in FR1 as specified in clauses 6.1.6.1 of TS 38.133.

6.3.3.3.2 Test applicability

This test applies to all types of NR UE from Release 17 onwards.

6.3.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.3.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.3.3.

6.3.3.3.4 Test description

6.3.3.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.3.3.4.1-1.

Table 6.3.3.3.4.1-1: Supported test configurations for NR-DC FR1 conditional handover including target MCG and target SCG

Config	Description
1	Source Cells (PCell and PSCell): FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target Cells (PCell and PSCell): FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source Cells (PCell and PSCell): FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target Cells (PCell and PSCell): FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source Cells (PCell and PSCell): FR1 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target Cells (PCell and PSCell): FR1 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.3.3.4.1-2

Table 6.3.3.3.4.1-2: Initial conditions for NR-DC FR1 conditional handover including target MCG and target SCG

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.3.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The power levels and settings for NR Cell 1 and Cell 2 are set according to Annex C.1.2 and C.1.3. Cell 3 and Cell 4 are NR FR1 target PCell and target PSCell respectively, and their power levels and settings are also set according to Annex C.1.2 and C.1.3.

2. The test parameters are given in Table 6.3.3.3.4.1-3 and 6.3.3.3.4.1-4 below, with A3-Offset modified by Test Tolerance.

Table 6.3.3.3.4.1-3: General test parameters for NR-DC FR1 PCell handover at conditional handover including target MCG and target SCG

Parameter	Unit	Value	Comment

Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 3	
Final condition	Active cell		Cell 3	
A3-Offset in handover condition		dB	-4	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Cell 1 and Cell 3 are synchronous cells
T1		s	5	
T2		s	≤2	

Table 6.3.3.3.4.1-4: General test parameters for NR-DC FR1 PSCell change at conditional handover including target MCG and target SCG

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 2	
	Neighbouring cell		Cell 4	
Final condition	Active cell		Cell 4	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Cell 2 and Cell 4 are Synchronous cells
T1		s	5	
T2		s	≤10	

6.3.3.3.4.2 Test procedure

The test scenario comprises four NR cells, source PCell (Cell 1) and source PSCell (Cell 2), target PCell (Cell 3), and target PSCell (Cell 4). Cell 1 and Cell 3 are on radio channel 1 in FR1. Cell 2 and Cell 4 are on radio channel 2 in FR1.The test consists of two successive time periods, with time durations of T1 and T2 respectively. General test parameters and cell specific parameters are given in Tables 6.3.3.3.4.1-3, 6.3.3.3.4.1-4, 6.3.3.3.5-1 and 6.3.3.3.5-2. No measurement gap is configured in the test case.

At the start of T1, the UE shall be connected to Cell 1 (source PCell) on radio channel 1 and Cell 2 (source PSCell) on radio channel 2. UE is not aware of any timing information of Cell 3 (target PCell) and Cell 4 (target PSCell).

NR shall configure a condition implying conditional handover to Cell 3 and Cell 4 during T1, at a time earlier than T_{RRC} before the beginning of T2. UE shall be able to do inter-frequency conditional handover from NR-FR1 cell 1 to NR-FR1 cell 3 and intra-frequency PSCell change from NR-FR1 cell 2 to NR-FR1 cell 4.

T_{RRC} = 16ms, is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

At the start of T2, Cell3 and Cell 4 become detectable. The condition for conditional PCell handover is met during T2. During T2, the UE performs measurement on Cell3.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 is the active PCell and Cell 2 is the active PSCell. Set Cell 3 and Cell 4 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 6.3.3.3.4-1 and 6.3.3.3.4-2. Propagation conditions are set according to Annex C clause C.2.2. T1 starts. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1, Cell 2 and monitoring corresponding ACK/NACK feedback sent by the UE.

3. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) and Cell 4 physical cell identity = ((current cell 4 physical cell identity + 1) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure CHO execution condition for Cell 3 which is event A3 and subsequent PSCell change from Cell 2 to Cell 4.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting at T1 to power setting at T2 as specified in Table 6.3.3.3.5-1 and 6.3.3.3.5-2. T2 starts.

7. If

   a) The UE shall start to transmit the PRACH to Cell 3 less than $T_{measure} + T_{interrupt} + T_{CHO_execution}$ =920 +57 +10=987 ms from the start of T2, and the interruption during T2 shall not exceeed $T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$=10+25+20+2=57ms,

   and

   b) The UE shall start to transmit the PRACH to Cell 4 less than $T_{measure} + T_{CHO_execution} + T_{processing} + T_{search_PCell_Conditional} + T_{search_PSCell} + T_{\Delta_PSCell} + T_{PSCell_DU}$ + 2 ms =920+10+25+0+ (3*20)+ 20+2=1037ms from the start of T2,

   and

   c) no longer than X consecutive ACK/NACK DTXs are observed by the SS from the start of T2 to the instant the UE transmits the first PRACH preamble, where

   - $X = T_{interrupt} + k_1$ for test configuration 1 in Table 6.3.3.3.4.1-1
   - $X = T_{interrupt}$ for test configuration 2 in Table 6.3.3.3.4.1-1
   - $X = 2 \cdot T_{interrupt}$ for test configuration 3 in Table 6.3.3.3.4.1-1.

   then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1 and Cell 2.

9. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1 and Cell 2, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1 and Cell 2.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.3.3.4.3 Message Contents

FFS

6.3.3.3.5 Test requirements

Table 6.3.3.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.3.3.5-1: Cell specific test parameters for NR-DC FR1 PCell handover at conditional handover including target MCG and target SCG

Parameter		Unit	Cell 1		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			

DRx Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR2.1 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15
	Config 3		30
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15
	Config 3		30
PRACH configuration			FR1 PRACH configuration 1
BWP	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1

BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98+TT		-98+TT	
N_{oc} Note2	Config 1,2	dBm/SCS	-98+TT		-98+TT	
	Config 3		-95+TT		-95+TT	
$\hat{E}_s / I_{ot}$		dB	4+TT	4+TT	-Infinity	5+TT
$\hat{E}_s / N_{oc}$		dB	4+TT	4+TT	-Infinity	5+TT
SSB_RP	Config 1,2	dBm/SCS	-94+TT	-94+TT	-Infinity	-93+TT
	Config 3	dBm/SCS	-91+TT	-91+TT	-Infinity	-90+TT
Io Note3	Config 1,2	dBm/ 9.36MHz	-64.59 +TT	-64.59 +TT	-70.05 +TT	-63.85 +TT
	Config 3	dBm/ 38.16MHz	-58.49 +TT	-58.49 +TT	-63.94 +TT	-57.75 +TT
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.3.3.3.5-2: Cell specific test parameters for NR-DC FR1 PSCell change at conditional handover including target MCG and target SCG

Parameter		Unit	Cell 2		Cell 4	
			T1	T2	T1	T2
NR RF Channel Number			2		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98+TT		-98+TT	
N_{oc} Note2	Config 1,2	dBm/SCS	-98+TT		-98+TT	
	Config 3		-95+TT		-95+TT	
$\hat{E}_s / I_{ot}$		dB	4+TT	4+TT	-Infinity	5+TT
$\hat{E}_s / N_{oc}$		dB	4+TT	4+TT	-Infinity	5+TT
SSB_RP	Config 1,2	dBm/SCS	-94+TT	-94+TT	-Infinity	-93+TT
	Config 3	dBm/SCS	-91+TT	-91+TT	-Infinity	-90+TT

Io[Note3]	Config 1,2	dBm/ 9.36MHz	-64.59 +TT	-64.59 +TT	-70.05 +TT	-63.85 +TT
	Config 3	dBm/ 38.16MHz	-58.49 +TT	-58.49 +TT	-63.94 +TT	-57.75 +TT
Propagation condition		-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

$T_{RRC} + T_{Event_DU}$ occurs during T1 as the handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to

- Cell 3 less than $T_{measure} + T_{interrupt} + T_{CHO_execution}$ =920 +57 +10=987 ms from the start of T2, and the interruption during T2 shall not exceeed $T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$=10+25+20+2=57ms.
- Cell 4 less than $T_{measure} + T_{CHO_execution} + T_{processing} + T_{search_PCell_Conditional} + T_{search_PSCell} + T_{\Delta_PSCell} + T_{PSCell_DU}$ + 2 ms =920+10+25+0+ (3*20)+ 20+2=1037ms from the start of T2,

excluding any transmissions which do not occur due to measurement gaps.

The PCell conditional handover delay can be expressed as specified in clause 6.1.6.1:

$D_{CHOwithPSCell_PCell} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH as specified in clause 6.1.6.1.1

$T_{interrupt} = T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$ ms

The PSCell conditional handover delay can be expressed as specified in clause 6.1.6.1.2:

$D_{CHOwithPSCell_PSCell} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{CHO_execution} + T_{processing} + T_{search_PCell_Conditional} + T_{search_PSCell} + T_{\Delta_PSCell} + T_{PSCell_DU}$ + 2 ms

The rate of the conditional handovers observed during repeated tests shall be at least 90%.

6.3.3.4 NR SA FR1 conditional handover including target MCG and candidate SCG

Editor's Note: This test case is incomplete in following aspects:

- Message contents is TBD.
- Test applicability is missing
- TT analysis is missing

6.3.3.4.1 Test purpose

This test is to verify the requirement for conditional handover including target MCG and candidate SCG for CPC in FR1 NR-DC specified in clause 6.1.7.1 of TS 38.133[6]. This test verifies the requirements for PCell conditional handover delay and PSCell conditional change delay as defined in section 6.1.7.1.1 and 6.1.7.1.2 of TS 38.133[6] respectively for FR1-FR1 NR-DC to FR1-FR1 NR-DC CHO with CPC. No measurement gap is configured in this test case.

6.3.3.4.2 Test applicability

This test applies to all types of NR UE from Release 18 onwards.

6.3.3.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.3.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.3.4.

6.3.3.4.4 Test description

6.3.3.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.3.4.4.1-1.

Table 6.3.3.4.4.1-1: Intra-frequency conditional handover from FR1 to FR1 test configurations

Config	Description
1	Source cells (PCell and PSCell): NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cells (PCell and PSCell): NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cells (PCell and PSCell): NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cells (PCell and PSCell): NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cells (PCell and PSCell): NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cells (PCell and PSCell): NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.3.4.4.1-2

Table 6.3.3.4.4.1-2: Initial conditions for NR-DC FR1 conditional handover including target MCG and candidate SCG

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.3.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The power levels and settings for NR Cell 1 and Cell 2 are set according to Annex C.1.2 and C.1.3. Cell 3 and Cell 4 are NR FR1 target PCell and target PSCell respectively, and their power levels and settings are also set according to Annex C.1.2 and C.1.3.

2. The test parameters are given in Table 6.3.3.4.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.3.4.4.1-3: General test parameters Intra-frequency conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cells		PCell: Cell 1 PSCell: Cell 2	
	Neighbouring cells		Cell 3, Cell 4	
Final condition	Active cells		PCell: Cell 3 PSCell: Cell 4	
A3-Offset		dBm	0	A3-offset is applied for conditions for both CHO and CPC
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
PRACH configuration index			FR1 PRACH configuration 1	As specified in table Table 6.3.3.2-3 in TS 38.211 [6]
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	1	
T3		s	≤2	

6.3.3.4.4.2 Test procedure

The test scenario comprises four NR cells, source PCell (Cell 1) and source PSCell (Cell 2), target PCell (Cell 3), and target PSCell (Cell 4). Cell 1 and Cell 3 are on radio channel 1 in FR1. Cell 2 and Cell 4 are on radio channel 2 in FR1. The test consists of three successive time periods, with time durations of T1, T2, and T3, respectively. General test parameters and cell specific parameters are given in Tables 6.3.3.4.4.1-3, 6.3.3.4.5-1 and 6.3.3.4.5-2.

At the start of time duration T1, the UE is connected to Cell 1 (source PCell) and Cell 2 (source PSCell). The UE may not have any timing information of Cell 3 (target PCell) and cell 4 (target PSCell).

NR shall configure a condition implying conditional handover to Cell 3 with a condition implying conditional PSCell change to cell 4 during T1, at a time earlier than T_{RRC} before the beginning of T2.

T_{RRC} = 16ms, is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

At the start of T2, Cell 3 becomes detectable. At the start of T3, Cell 4 becomes detectable. UE meets the handover condition and meets the PSCell change condition during T3.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 is the active PCell and Cell 2 is the active PCSell. Set Cell 3 and Cell 4 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 6.3.3.4.5-1 and 6.3.3.4.5-2. Propagation conditions are set according to Annex C clause C.2.2. T1 starts. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1, Cell 2 and monitoring corresponding ACK/NACK feedback sent by the UE.

3. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) and Cell 4 physical cell identity = ((current cell 4 physical cell identity + 1) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure CHO execution condition for Cell 3 and Cell 4, where event A3 is the CHO execution condition.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting at T1 to power setting at T2 as specified in Table 6.3.3.4.5-1 and 6.3.3.4.5-2. T2 starts.

7. When T2 expires, the SS shall switch the power settings at T2 to power setting at T3 as per Tables 6.3.3.4.5-1 and 6.3.3.4.5-2. T3 starts.

8. If

   a) The UE shall start to transmit PRACH to Cell 3 less than max ($T_{measure_PCell}$, $T_{measure_PSCell}$) + $T_{UE_preparation}$ + $T_{processing}$ + T_{Δ_PCell} + T_{PCell_DU} + 2 ms = (800 + 10 + 25 + 20 + 20 + 2) ms = 877 ms from the start of T3 and the interruption during T3 shall not exceeed $T_{processing}$ + T_{Δ_PCell} + T_{PCell_DU} + 2 ms = (25 + 20 + 20 + 2) ms = 67 ms

   b) The UE shall start to transmit PRACH to Cell 4 less than max ($T_{measure_PCell}$, $T_{measure_PSCell}$) + $T_{UE_preparation}$ + $T_{processing}$ + T_{Δ_PSCell} + T_{PSCell_DU} + 2 ms = (800 + 10 + 25 + 20 + 20 + 2) ms = 877 ms from the start of T3. The interruption during T3 shall not exceed $T_{processing}$ + T_{Δ_PSCell} + T_{PSCell_DU} + 2 ms = 25 ms + 20 + 20 ms + 2 ms = 67 ms.

   and

   c) no longer than X consecutive ACK/NACK DTXs are observed by the SS from the start of T2 to the instant the UE transmits the first PRACH preamble, where

   - $X = T_{interrupt} + k_1$ for test configuration 1 in Table 6.3.3.4.4.1-1
   - $X = T_{interrupt}$ for test configuration 2 in Table 6.3.3.4.4.1-1
   - $X = 2 \cdot T_{interrupt}$ for test configuration 3 in Table 6.3.3.4.4.1-1.

then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

9. After T3 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1 and Cell 2.

10. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.3.4.4.3 Message Contents

TBD

6.3.3.4.5 Test requirements

Table 6.3.3.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.3.4.5-1: Cell specific test parameters for FR1-FR1 CHO (Cell 1 and Cell 3)

Parameter		Unit	Cell 1			Cell 3		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR2.1 TDD					
CORESET Reference Channel	Config 1		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR2.1 TDD					
TRS configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					

PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98+TT					
N_{oc} Note2	Config 1,2	dBm/SCS	-98+TT					
	Config 3		-95+TT					
$\hat{E}_s/I_{ot}$		dB	4+TT	4+TT	4+TT	-Infinity	5+TT	5+TT
$\hat{E}_s/N_{oc}$		dB	4+TT	4+TT	4+TT	-Infinity	5+TT	5+TT
SSB_RP	Config 1,2	dBm/SCS	-94+TT	-94+TT	-94+TT	-Infinity	-93+TT	-93+TT
	Config 3	dBm/SCS	-91+TT	-91+TT	-91+TT	-Infinity	-90+TT	-90+TT
Io Note3	Config 1,2	dBm/9.36 MHz	-64.59 +TT	-64.59 +TT	-64.59 +TT	-70.05 +TT	-63.85 +TT	-63.85 +TT
	Config 3	dBm/38.16 MHz	-58.49 +TT	-58.49 +TT	-58.49 +TT	-63.94 +TT	-57.75 +TT	-57.75 +TT
Propagation condition		-	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.3.3.4.5-2: Cell specific test parameters for NR-DC FR1 PSCell change at conditional handover including target MCG and candidate SCG

Parameter	Unit	Cell 2	Cell 4

			T1	T2	T3	T1	T2	T3
NR RF Channel Number			2			2		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR2.1 TDD					
CORESET Reference Channel	Config 1		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR2.1 TDD					
TRS configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								

EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/ 15kHz	-98+TT					
N_{oc} Note2	Config 1,2	dBm/ SCS	-98+TT					
	Config 3		-95+TT					
$\hat{E}_s/I_{ot}$		dB	4+TT	4+TT	4+TT	-Infinity	-Infinity	5+TT
$\hat{E}_s/N_{oc}$		dB	4+TT	4+TT	4+TT	-Infinity	-Infinity	5+TT
SSB_RP	Config 1,2	dBm/ SCS	-94+TT	-94+TT	-94+TT	-Infinity	-Infinity	-93+TT
	Config 3	dBm/ SCS	-91+TT	-91+TT	-91+TT	-Infinity	-Infinity	-90+TT
Io Note3	Config 1,2	dBm/ 9.36 MHz	-64.59 +TT	-64.59 +TT	-64.59 +TT	-70.05 +TT	-70.05 +TT	-63.85 +TT
	Config 3	dBm/ 38.16 MHz	-58.49 +TT	-58.49 +TT	-58.49 +TT	-63.94 +TT	-63.94 +TT	-57.75 +TT
Propagation condition		-	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

$T_{RRC} + T_{Event_DU}$ occurs during T1 and T2, as the conditional handover condition for Cell 3 becomes satisfied at the start of T2, and the conditional PSCell change condition for cell 4 becomes satisfied at the start of T3. The test shall verify that there are no interruptions during T1 and T2. The UE shall not send PRACH to Cell 3 before the end of T2.
The UE shall start to transmit PRACH to

- Cell 3 less than max ($T_{measure_PCell}$, $T_{measure_PSCell}$) + $T_{UE_preparation}$ + $T_{processing}$ + T_{Δ_PCell} + T_{PCell_DU} + 2 ms = (800 + 10 + 25 + 20 + 20 + 2) ms = 877 ms from the start of T3 and the interruption during T3 shall not exceeed $T_{processing}$ + T_{Δ_PCell} + T_{PCell_DU} + 2 ms = (25 + 20 + 20 + 2) ms = 67 ms

- Cell 4 less than max ($T_{measure_PCell}$, $T_{measure_PSCell}$) + $T_{UE_preparation}$ + $T_{processing}$ + T_{Δ_PSCell} + T_{PSCell_DU} + 2 ms = (800 + 10 + 25 + 20 + 20 + 2) ms = 877 ms from the start of T3. The interruption during T3 shall not exceed $T_{processing}$ + T_{Δ_PSCell} + T_{PSCell_DU} + 2 ms = 25 ms + 20 + 20 ms + 2 ms = 67 ms.

The rate of the correct conditional handovers observed during repeated tests shall be at least 90%.

6.3.3.5

6.3.3.6 NR SA FR1 Intra-frequency NES triggering conditional handover

6.3.3.6.1 Test purpose

To verify the requirement for the NR FR1 intra frequency NES-based conditional handover requirements specified in TS 38.133 [6] clause 6.1.4.2

6.3.3.6.2 Test applicability

This test applies to all types of NR UE from Release 18 onwards and supporting DCI-based enabling/disabling NES-specific CHO execution condition.

6.3.3.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.3.6.

6.3.3.6.4 Test description

6.3.3.6.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.3.6.4.1-1.

Table 6.3.3.6.4.1-1: NES triggering Intra-frequency conditional handover from FR1 to FR1 test configurations

Config	Description
6.3.3.6-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.3.6-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.3.6-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.3.6.4.1-2

Table 6.3.3.6.4.1-2: Initial conditions for NR SA FR1 conditional handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.3.6.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.3.6.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.3.3.6.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.3.6.4.1-3: General test parameters for NES triggering Intra-frequency conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset in condition		dB	-1	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
nesEvent			true	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.

PRACH configuration index		FR1 PRACH configuration 1	As specified in Table 6.3.3.2-3 in TS 38.211
Time offset between cells		3 μs	Synchronous cells
T1	s	5	
T2	s	≤2	

6.3.3.6.4.2 Test procedure

The test scenario comprises of 1 NR carrier and two cells, Cell 1 and Cell 2, on this carrier. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 6.3.3.6.4.1-3 and 6.3.3.6.5-1 respectively. No measurement gap is configured in the test case.

The test consists of two successive time periods, with time durations of T1 and T2 respectively.

At the start of time duration T1, the UE may not have any timing information of Cell 2. The UE is configured with a NES-based condition implying handover to cell 2 firstly, and then configured with DCI 2-9 with NES-mode indication during T1, at a time earlier than T_{RRC} before the beginning of T2. No interruption shall be observed in time period T1, where

- T_{RRC} = 10ms, is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

From start of T2, the Cell 2 becomes detectable and NES-based event is fulfilled. During T2, the UE performs measurement on Cell 2 and evaluates the execution condition, and starts handover procedure when execution condition is satisfied. The UE shall send PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the start of T2. The Interruption length $T_{interrupt}$ shall also be verified in T2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 6.3.3.6.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

4. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure NES-based CHO execution condition for the UE.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. The SS shall transmit DCI 2-9 command of '1' value for indicating NES-specific CHO execution condition.

7. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.3.6.5-1. T2 starts.

8. If

   e) the UE transmits the PRACH preambles to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the beginning of time period T2,

   and

   f) no longer than X consecutive ACK/NACK DTXs are observed by the SS from the start of T2 to the instant the UE transmits the first PRACH preamble, where

   - $X = T_{interrupt} + k_1$ for test configuration 6.3.3.6-1
   - $X = T_{interrupt}$ for test configuration 6.3.3.6-2
   - $X = 2 \cdot T_{interrupt}$ for test configuration 6.3.3.6-3.

then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

9. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

10. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.3.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.3.3.6.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 6.3.3.6.4.3-2	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
conditionalReconfiguration-r16	ConditionalReconfiguration	Table 6.3.3.6.4.3-5	
}			
}			
}			
}			
}			
}			

Table 6.3.3.6.4.3-2: MeasConfig (Table 6.3.3.6.4.3-1)

Derivation Path: Table H.3.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofObjectId)) OF MeasObjectToAddMod {	1 entry		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR	Table 6.3.3.6.4.3-3	
}			
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 6.3.3.6.4.3-4	
}			
}			
}			

measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	1 entry		
MeasIdToAddMod[1] SEQUENCE {			
measId	1		
measObjectId	1		
reportConfigId	1		
}			
}			
quantityConfig	QuantityConfig specified in Table H.3.1-5		
}			

Table 6.3.3.6.4.3-3: MeasObjectNR (Table 6.3.3.6.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR for PCell		
smtc1	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 6.3.3.6.4.3-4: ReportConfigNR (Table 6.3.3.6.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
condTriggerConfig SEQUENCE {			
condEventId CHOICE {			
condEventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-2	actuall value = -2*0.5 = -1dB	
}			
hysteresis	0	actuall value = 0*0.5 = 0dB	
timeToTrigger	ms0		
}			
}			
nesEvent-r18	true		
}			
}			
}			

Table 6.3.3.6.4.3-5: ConditionalReconfiguration (Table 6.3.3.6.4.3-1)

Derivation Path: TS 38.508-1[14], Table 4.6.3-25D			
Information Element	**Value/remark**	**Comment**	**Condition**
ConditionalReconfiguration-r16::= SEQUENCE {			
condReconfigToAddModList-r16 SEQUENCE (SIZE (1.. maxNrofCondCells-r16)) OF CondReconfigToAddMod-r16 {	1 entry		
CondReconfigToAddMod-r16 [1] SEQUENCE {		entry 1	
condReconfigId-r16	1		

condExecutionCond-r16 SEQUENCE (SIZE (1..2)) OF MeasId {	1 entry		
MeasId[1]	1	The MeasId configured in Table 6.3.3.6.4.3-2	
}			
condRRCReconfig-r16	OCTET STRING (CONTAINING RRCReconfiguration Specified in Table 4.8.1-1A with condition RBConfig_NoKeyChange)		
}			
}			
}			

6.3.3.6.5 Test requirements

Table 6.3.3.6.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.3.6.5-1: Cell specific test parameters for NR FR1-FR1 NES triggering Intra frequency conditional handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			

EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-2.41	- Infinity	1.36
$\hat{E}_s / N_{oc}$		dB	8	8	- Infinity	10
SSB_RP	Config 1,2	dBm/SCS	-90	-90	- Infinity	-88
	Config 3	dBm/SCS	-87	-87	- Infinity	-85
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-57.67	-61.41	-57.67
	Config 3	dBm/ 38.16MHz	-55.31	-50.56	-55.31	-50.56
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The rate of correct handovers observed during repeated tests shall be at least 90%.

The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ from the start of T2.
where:

- $T_{measure}$ = 800 ms, is the measurements time specified in TS 38.133 [6] clause 6.1.4.2.2.
- $T_{CHO_execution}$ = 10 ms, is the conditional execution preparation time specified in TS 38.133 [6] clause 6.1.4.2.2.
- $T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin}$ ms = 62ms, is the interruption time specified in TS 38.133 [6] 6.1.4.2.4.
  - $T_{processing}$ = 20 ms, is time for UE processing;
  - T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell;
  - T_{Δ} = 20 ms, is time for fine time tracking and acquiring full timing information of the target cell;
  - T_{margin} = 2 ms, is time for SSB post-processing.

This gives a total of 872 ms

The interruption during T2 shall not exceed $T_{interrupt}$ = 62ms.

6.3.3.7 NR SA FR1-FR1 Inter-frequency NES-based conditional handover

6.3.3.7.1 Test purpose

To verify the requirement for the NES-based NR FR1-NR FR1 inter frequency conditional handover requirements specified in 38.133 [6] clause 6.1.4.2

6.3.3.7.2 Test applicability

This test applies to all types of NR UE from Release 18 onwards and supporting DCI-based enabling/disabling NES-specific CHO execution condition.

6.3.3.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.3.7.

6.3.3.7.4 Test description

6.3.3.7.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.3.7.4.1-1.

Table 6.3.3.7.4.1-1: NES-based inter-frequency conditional handover from FR1 to FR1 test configurations

Config	Description
6.3.3.7-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.3.7-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.3.7-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.3.7.4.1-2

Table 6.3.3.7.4.1-2: Initial conditions for NR SA FR1 conditional handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.3.7.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.3.3.7.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.3.3.7.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 6.3.3.7.4.1-3: General test parameters for NES-based inter-frequency conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset in handover condition without nesEvent-r18		dB	10	
A3-Offset in handover condition with nesEvent-r18 = true		dB	-4	

Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
T1	s	5	
T2	s	≤2	

6.3.3.7.4.2 Test procedure

The test scenario comprises of 1 NR carrier and two cells, Cell 1 and Cell 2, on this carrier. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 6.3.3.7.4.1-3 and 6.3.3.7.5-1 respectively. Measurement gap (gap pattern #0) is configured in the test case. In this test, UE is not indicated to report SSB based RRM measurement result with the associated SSB index for carrier of cell 2.

The test consists of two successive time periods, with time durations of T1 and T2 respectively.

At the start of time duration T1, the UE does not have any timing information of cell 2. The UE is configured with a condition implying handover to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2. No interruption shall be observed in time period T1, where

- T_{RRC} = 10ms, is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

At the start of T2, cell 2 becomes detectable and meets the NES-based handover condition., and DCI 2-9 command of '1' value for indicating NES-specific CHO execution condition is transmitted to UE at 950ms from the start of T2, i.e., UE receives DCI 2-9 command later than the time at the end of $T_{Event_DU} + T_{identify_inter_without_index}$.

From start of T2, the Cell 2 becomes detectable and NES-based event is fulfilled. UE is configured with DCI 2-9 command of '1' value for indicating NES-specific CHO execution condition at 950ms from the start of T2, i.e., UE receives DCI 2-9 command later than the time at the end of $T_{Event_DU} + T_{identify_inter_without_index}$. During T2, the UE performs measurement on Cell 2 and evaluates the execution condition, and starts handover procedure when execution condition is satisfied. The UE shall send PRACH to Cell 2 less than $950 + T_{CHO_execution} + T_{interrupt}$ ms from the start of T2. The Interruption length $T_{interrupt}$ shall also be verified in T2

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 6.3.3.7.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

4. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure NES-based CHO execution condition and measurement gap pattern #0 for the UE.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.3.7.5-1. T2 starts.

7. At 950ms from the start of T2, the SS shall transmit DCI 2-9 command of '1' value for indicating NES-specific CHO execution condition.

8. If

   g) the UE transmits the PRACH preambles to Cell 2 less than $950 + T_{CHO_execution} + T_{interrupt}$ ms from the beginning of time period T2,

   and

h) no longer than X consecutive ACK/NACK DTXs are observed by the SS from the start of T2 to the instant the UE transmits the first PRACH preamble, where

- $X = T_{interrupt} + k_1$ for test configuration 6.3.3.7-1
- $X = T_{interrupt}$ for test configuration 6.3.3.7-2
- $X = 2 \cdot T_{interrupt}$ for test configuration 6.3.3.7-3.

then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

9. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.
10. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.
11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.3.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.3.3.7.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 6.3.3.7.4.3-2	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
conditionalReconfiguration-r16	ConditionalReconfiguration	Table 6.3.3.7.4.3-7	
}			
}			
}			
}			
}			
}			
}			

Table 6.3.3.7.4.3-2: MeasConfig (Table 6.3.3.7.4.3-1)

Derivation Path: Table H.3.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofObjectId)) OF MeasObjectToAddMod {	2 entries		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR-f1	Table 6.3.3.7.4.3-3	
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		entry 2	
measObjectId	2		
measObject CHOICE {			

measObjectNR	MeasObjectNR-f2	Table 6.3.3.7.4.3-4	
}			
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	2 entries		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR-1	Table 6.3.3.7.4.3-5	
}			
}			
ReportConfigToAddMod[2] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR-2	Table 6.3.3.7.4.3-6	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	2 entries		
MeasIdToAddMod[1] SEQUENCE {			
measId	1		
measObjectId	2		
reportConfigId	1		
}			
MeasIdToAddMod[1] SEQUENCE {			
measId	2		
measObjectId	2		
reportConfigId	2		
}			
}			
measGapConfig	MeasGapConfig specified in Table H.3.1-6 with condition gapUE and Pattern #0		
quantityConfig	QuantityConfig specified in Table H.3.1-5		
}			

Table 6.3.3.7.4.3-3: MeasObjectNR-f1 (Table 6.3.3.7.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR for Cell 1		
smtc1	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 6.3.3.7.4.3-4: MeasObjectNR-f2 (Table 6.3.3.7.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR for Cell 2		
smtc1	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 6.3.3.7.4.3-5: ReportConfigNR-1 (Table 6.3.3.7.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
condTriggerConfig SEQUENCE {			
condEventId CHOICE {			
condEventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	20	actuall value = 20*0.5 = 10dB	
}			
hysteresis	0	actuall value = 0*0.5 = 0dB	
timeToTrigger	ms0		
}			
}			
}			
}			
}			

Table 6.3.3.7.4.3-6: ReportConfigNR-2 (Table 6.3.3.7.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
condTriggerConfig SEQUENCE {			
condEventId CHOICE {			
condEventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-8	actuall value = -8*0.5 = -4dB	
}			
hysteresis	0	actuall value = 0*0.5 = 0dB	
timeToTrigger	ms0		
}			
}			
nesEvent-r18	true		
}			
}			
}			

Table 6.3.3.7.4.3-7: ConditionalReconfiguration (Table 6.3.3.7.4.3-1)

Derivation Path: TS 38.508-1[14], Table 4.6.3-25D			
Information Element	**Value/remark**	**Comment**	**Condition**
ConditionalReconfiguration-r16::= SEQUENCE {			
condReconfigToAddModList-r16 SEQUENCE (SIZE (1.. maxNrofCondCells-r16)) OF CondReconfigToAddMod-r16 {	1 entry		
CondReconfigToAddMod-r16 [1] SEQUENCE {		entry 1	
condReconfigId-r16	1		
condExecutionCond-r16 SEQUENCE (SIZE (1..2)) OF MeasId {	2 entries		
MeasId[1]	1	The MeasId configured in Table 6.3.3.7.4.3-2	
MeasId[2]	2	The MeasId configured in Table 6.3.3.7.4.3-2	
}			
condRRCReconfig-r16	OCTET STRING (CONTAINING RRCReconfiguration Specified in Table 4.8.1-1A with condition RBConfig_NoKeyChange)		
}			
}			
}			

6.3.3.7.5 Test requirements

Table 6.3.3.7.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.3.7.5-1: Cell specific test parameters for NES-based NR FR1-FR1 inter frequency conditional handover test case

Parameter		**Unit**	**Cell 1**		**Cell 2**	
			T1	**T2**	**T1**	**T2**
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
Gap pattern ID			gp0			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OCNG pattern 1			

SMTC Configuration			SMTC pattern 1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98		-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	6.70
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	6.70
SSB_RP	Config 1,2	dBm/SCS	-94	-94	-Infinity	-91.30
	Config 3	dBm/SCS	-91	-91	-Infinity	-88.30
Io Note3	Config 1,2	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-62.51
	Config 3	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-56.40
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The rate of correct handovers observed during repeated tests shall be at least 90%.

The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ from the start of T2. where:

- $T_{measure}$ = 950 ms, is the measurements time specified in 38.133 [6] clause 6.1.4.2.2.
- $T_{CHO_execution}$ = 10 ms, is the conditional execution preparation time specified in 38.133 [6] clause 6.1.4.2.2.
- $T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin}$ ms = 62ms, is the interruption time specified in 38.133 [6] 6.1.4.2.4.
  - $T_{processing}$ = 20 ms, is time for UE processing;
  - T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell;
  - T_{Δ} = 20 ms, is time for fine time tracking and acquiring full timing information of the target cell;

- T_{margin} = 2 ms, is time for SSB post-processing.

This gives a total of 1022 ms

The interruption during T2 shall not exceed $T_{interrupt}$ = 62ms.

6.3.4 LTM PCell Switch

6.3.4.0 Minimum conformance requirements

6.3.4.0.1 Minimum conformance requirements for LTM PCell Switch

LTM cell switch delay D_{LTM} is the delay from the end of the last TTI containing the MAC-CE command for cell switch until the time the UE transmits the first UL message on the target cell.

When the target cell and the target joint UL/DL TCI state or separate UL and DL TCI states in the MAC-CE LTM cell switch command are known, the LTM cell switch delay is defined as:

$$D_{LTM} = T_{cmd} + T_{LTM\text{-}interrupt}$$

Where:

T_{cmd} equals to T_{HARQ} + 3ms, where T_{HARQ} is the timing between cell switch command and acknowledgement as specified in TS 38.213[8].

$T_{LTM\text{-}interrupt}$ is as stated in TS 38.133[6] section 6.3.1.3.

The target cell in the LTM cell switch command is known if the following conditions are met:

- During the last 5 seconds before the reception of the cell switch command:
  - The UE has sent a valid L1 or L3 measurement report for the target cell, and
  - One of the SSBs measured from the NR target cell configured for measurement remains detectable according to the cell identification conditions specified in TS 38.133[6] clause 9.2 for intra-frequency cell and in TS 38.133[6] clause 9.3 for inter-frequency cell,
- One of the SSBs measured from the NR target cell configured for measurement remains detectable according to the cell identification conditions specified in TS 38.133[6] clause 9.2 for intra-frequency cell and in TS 38.133[6] clause 9.3 for inter-frequency cell,

Otherwise, the cell is unknown.

The target joint DL/UL TCI state or separate DL and UL TCI states in the LTM cell switch command are known if the following conditions are met:

[- The target TCI state in the cell switch command is activated not more than TBD ms before the reception of the cell switch command and SNR of the SSB associated to TCI state ≥ -3dB; or]

[- The target TCI state in cell switch command is activated before receiving the cell switch command and the SSB associated to target TCI state is available at least once every TBD ms after the TCI state activation command is received and SNR of the SSB associated to TCI state ≥ -3dB; or]

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target DL/UL TCI state to the completion of LTM cell switch, where the RS resource for L1-RSRP measurement is the RS in target DL/UL TCI state or QCLed to the target DL/UL TCI state
  - LTM cell switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
  - The UE has sent at least 1 L1-RSRP report for the target DL/UL TCI state before the LTM cell switch command
  - The target DL/UL TCI state remains detectable during the LTM cell switching period
  - The SSB associated with the target DL/UL TCI state remain detectable during the cell switching period

- SNR of the TCI state ≥ -3dB

Otherwise, the target joint DL/UL TCI state or separate DL and UL TCI state is unknown.

The interruption time $T_{LTM-interrupt}$ is the time between the end of the last TTI containing the MAC-CE command for LTM cell switch until the time the UE transmits the first UL message on the target cell, excluding T_{cmd} stated in TS 38.133[6] section 6.3.1.2.

$$T_{LTM-interrupt} = T_{LTM-RRC-processing} + T_{LTM-processing} + T_{first-RS} + T_{RS-proc} + T_{LTM-IU} \text{ ms},$$

Where:

$T_{LTM-RRC-processing}$ is the time for ASN.1 decoding and validity/compliance check for the RRC configuration of the LTM target cell indicated in the LTM cell switch command.

$T_{LTM-RRC-processing}$ = 0, if the UE supports [*earlyDecodingAndValidityCheck*] capability, and at least one of the following conditions is met:

- The number of candidate cells in the LTM candidate cell configuration does not exceed [*number of candidate cells for early ASN.1 decoding and validity check*],
- UE has received LTM candidate cell TCI state activation command for the target cell at least T_{HARQ} + 13 ms before the LTM cell switch command, and the number of candidate cells with TCI state(s) in LTM candidate cell active TCI state list does not exceed [*number of candidate cells for early ASN.1 decoding and validity check*],
- UE has received PDCCH order for early RACH for the target cell at least $N_{T,2}$+10 ms before the LTM cell switch command, where $N_{T,2}$ is defined in section 8.1 of TS 38.213 [3]. [*FFS further conditions*]
- *[FFS: SCell is not part of the cell switch.]*

Otherwise $T_{LTM-RRC-processing}$ = 10 ms.

$T_{LTM-processing}$ is the time for UE processing, consisting of applying the target cell parameters and L1/L2 change.

If the UE supports [*faster LTM processing*] capability, the value of $T_{LTM-processing}$ equals to

[*faster intra-FR processing delay (10 ms or 15 ms)*] for FR1 to FR1 and FR2 to FR2 LTM cell switch.

[*faster inter-FR processing delay (20 ms or 30 ms)*] for FR1 to FR2 and FR2 to FR1 LTM cell switch.

Otherwise, the value of $T_{LTM-processing}$ equals to

- 20 ms for FR1 to FR1 and FR2 to FR2 LTM cell switch.
- 40 ms for FR1 to FR2 and FR2 to FR1 LTM cell switch.

Editor's note: FFS whether a smaller value can be considered in some scenarios or under certain conditions, when the UE does not support [*faster LTM processing*] capability.

$T_{first-RS}$ is the time for fine time tracking and acquiring full timing information of the target cell.

$T_{RS-proc}$ is the time for SSB processing.

$T_{first-RS}$ = 0 and $T_{RS-proc}$= 0 under the following conditions:

- The target TCI state indicated in the LTM cell switch command is in the serving cell active TCI state list, or
- The UE is configured with LTM L1 intra- and/or inter-frequency measurements for the target cell, and
  - The target TCI state in the cell switch command is in the LTM candidate cell active TCI state list, and
    - the time gap between receiving the LTM candidate cell TCI state activation MAC-CE and the cell switch command is at least TCI state activation delay stated in TS 38.133[6] section 8.x, and

- the time gap between receiving the LTM candidate cell TCI state activation MAC-CE and the cell switch command is not more than [160 ms], or

- the measurement period of the SSB associated to target TCI state is not larger than 160 ms after the LTM candidate cell TCI state activation MAC-CE is received, or

- The target cell is an FR1 cell, and the UE is not configured with LTM L1 intra- and/or inter-frequency measurements for the target cell, and

  - The target TCI state in the cell switch command is in the LTM candidate cell active TCI state list, and

    - the time gap between receiving the LTM candidate cell TCI state activation MAC-CE and the cell switch command is at least TCI state activation delay stated in TS 38.133[6] section 8.x, and not more than TCI state activation delay stated in TS 38.133[6] section 8.x + [160 ms], or

  - The time gap between the latest PDCCH ordered RACH preamble transmission on the target cell and the cell switch command is not more than [160 ms].

Otherwise,

$T_{first-RS}$ is the time to the first SSB transmission on the target cell [after T_{cmd}].

Editor's note: FFS whether TRS transmission is also considered.

$T_{RS-proc}$ = 2 ms.

T_{LTM-IU} is the interruption uncertainty during LTM cell switch.

For RACH-based LTM cell switch, T_{LTM-IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{LTM-IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

For RACH-less LTM cell switch, $T_{LTM-IU_}$is the uncertainty on transmitting the first uplink transmission on the target cell.

6.3.4.1 NR SA FR1 RACH-based Intra-frequency PCell switch from FR1 to FR1

6.3.4.1.1 Test purpose

To verify the UE's ability to perform NR FR1-NR FR1 FR1 RACH-based intra frequency PCell switch specified in 38.133 [6] clause 6.3.1 for both with and without early TCI state activation.

6.3.4.1.2 Test applicability

This test applies to all types of NR UEs supporting NR LTM for MCG with RACHwith L1-RSRP measurement and report based on SSB(s) of candidate cell(s) from Release 18 onwards.

The test consists of 4 tests, and UE is required to pass one among Test 1A, Test 1B, Test 2A and Test 2B.

- Test 1: for a UE supporting *ltm-MAC-CE-JointTCI-r18 and/or ltm-MAC-CE-SeparateTCI-r18*

  - Test 1A: for a UE supporting *ltm-MAC-CE-JointTCI-r18*.

  - Test 1B: for a UE supporting *ltm-MAC-CE-SeparateTCI-r18* and does not support *ltm-MAC-CE-JointTCI-r18*.

- Test 2: for a UE not supporting *ltm-MAC-CE-JointTCI-r18 and ltm-MAC-CE-SeparateTCI-r18*

  - Test 2A: for a UE supporting *ltm-BeamIndicationJointTCI-r18*.

  - Test 2B: for a UE supporting *ltm-BeamIndicationSeparateTCI-r18* and does not support *ltm-BeamIndicationJointTCI-r18.*

6.3.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.4.1.

6.3.4.1.4 Test description

6.3.4.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.4.1.4.1-1.

Table 6.3.4.1.4.1-1: Intra-frequency cell switch from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.4.1.4.1-2.

Table 6.3.4.1.4.1-2: Initial conditions for NR SA FR1 handover with known target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.4.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.3.4.1.4.1-3.

2. Message contents are defined in clause 6.3.4.1.4.3.

3. Two cells are deployed in the test, which are FR1 PCell(Cell 1) and FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 6.3.4.1.4.1-3: General test parameters for Intra-frequency cell switch from FR1 to FR1

Parameter		Unit	Value				Comment
			Test 1A	Test 1B	Test 2A	Test 2B	
Initial conditions	Active cell		Cell 1				
	Neighbouring cell		Cell 2				Cell 2 is the candidate cell
Final condition	Active cell		Cell 2				
A3-Offset		dB	-6				
Hysteresis		dB	0				
Time To Trigger		s	0				
Filter coefficient			0				L3 filtering is not used
includeBeamMeasurements			TRUE				
DRX			OFF				DRX is not used
Access Barring Information		-	Not Sent				No additional delays in random access procedure.
Time offset between cells			2 μs				RTD between cells is less than CP
deriveSSB-IndexFromCell			Enabled				

LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	80				Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1				Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1				
	spCellInclusion		N/A				
ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		Candidate DLorJoint TCI.State.0	Candidate DLorJoint TCI.State.2	Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	As specified in clause A.3.16B. In test 1A and 1B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for early TCI state activation. CandidateTCI-State#2 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command. In test 2A and 2B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command.
	#2 CandidateTCI-State#2		Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	N/A	N/A	
ltm-UL-TCI-StatesToAddModList	CandidateTCI-UL-State#1		N/A	Candidate UL TCI.State.0	N/A	Candidate UL TCI.State.0	
ltm-ConfigComplete			True				Candidate cell's configuration is complete configuration
T1		s	<3				
T2		s	≤0.2				
T3		s	≤0.1				
T4		s	≤0.1				

6.3.4.1.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. Test configurations are given in table 6.3.4.3.4.1-1. Both cell switch delay and interruption length are tested by using the parameters in table 6.3.4.1.4.1-2, and 6.3.4.1.4.1-3.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 6.3.4.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. SS shall transmit an RRCReconfiguration message, configuring measurement object.

4. UE shall transmit RRCReconfigurationComplete message.

5. If the UE transmit an A3 message report, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.4.1.5-1. T2 starts.

6. At the start of T2, the SS shall transmit an *RRCReconfiguration* message with *LTM-Candidate-r18* for Cell2 and SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports on candidate cell (Cell 2) in PUCCH format 2.

7. UE shall transmit RRCReconfigurationComplete message.

8. If the UE transmits a valid L1-RSRP result of Cell2:

   Test 1A and 1B: The SS shall switch the power setting from T2 to T3 as specified in Table 6.3.4.1.5-1. T3 starts.

   Test 2A and 2B: T3 is skipped. The SS shall switch the power setting from T2 to T4 as specified in Table 6.3.4.1.5-1. T4 starts, go to step10.

9. At the start of T3, the SS shall transmit the candidate cell TCI activation MAC-CE (Refer TS 38.321 [12], clauses 6.1.3.76) for Cell2. 50ms after the candidate cell TCI state activation MAC-CE transmission, the SS shall switch the power setting from T3 to T4 as specified in Table 6.3.4.1.5-1. T4 starts.

   candidate cell TCI activation MAC-CE:

   - Test 1A: *CandidateTCI-State#1* is activated.

   - Test 1B: *CandidateTCI-State#1* and *CandidateTCI-UL-State#1* is activated.

10. The start of T4 is the instant when the last TTI containing the LTM cell switch command MAC CE(Refer TS 38.321 [12], clauses 6.1.3.75) is sent by Cell1 to the UE.

    cell switch MAC-CE:

    - Contention-Free Random-Access Resources are indicated and the field of Timing Advance Command is set to FFF

    - Test 1A: CandidateTCI-State#2 is indicated.

    - Test 1B: CandidateTCI-State#2 and CandidateTCI-UL-State#1 are indicated

    - Test 2A: CandidateTCI-State#1 is indicated.

- Test 2B: CandidateTCI-State#1 and CandidateTCI-UL-State#1 are indicated

11. If the UE transmits the uplink PRACH channel to Cell 2 less than D_{LTM} from the beginning of time period T4 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.T4 ends.

12. After T4 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync*, which includes the release of *LTM-Config-r18* to cause UE handover back to Cell 1.

13. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1

14. Power off Cell2 and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop.

15. Repeat steps 2-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.3.4.1.4.3-1: Common Exception messages (step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 1 and Synchronous cells for Config 1 and 2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC pattern 1 and Synchronous cells for Config 3 Table H.3.1-4 with A3-offset = -6dB, includeBeamMeasurements = true and with Condition SSB Index Table H.3.1-5 with Condition SSB Index Table H.3.1-7 with Condition INTRA-FREQ and SSB Index

Table 6.3.4.1.4.3-2: Common Exception messages (step 6)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.12.1 with Condition LTM L1-RSRP Table H 3.12-2 with Condition LTM L1-RSRP Table H.3.12-3 for Cell 2 and Condition Candidate config and TCI_INFO Table H.3.12.4 Table H.3.12-5 with pucch-ResourceId = 8 Table H.3.12-6, H.3.12-7 abd H.3.12-13 with SSB index = 0 Table H.3.12-8 Table H.3.12-9 for CELL2 Table H.3.12-10 with Condition Joint AND Early DL Sync for test 1A Table H.3.12-10 with Condition Seperate for test 1B and 2B Table H.3.12-10 with Condition Joint for test 2A Table H.3.12-11

Table 6.3.4.1.4.3-3 *RACH-ConfigCommon* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric specified in TS 38.508-1 [14] Table 7.3.1-14 with condition FR1		
totalNumberOfRA-Preambles	48		
rsrp-ThresholdSSB	RSRP_51		
prach-RootSequenceIndex CHOICE {			
0			
}			
msg1-SubcarrierSpacing	kHz 15		Config 1, 2
	kHz 30		Config 3
}			

Table 6.3.4.1.4.3-4: *RACH-ConfigDedicated* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	1 entry		
ssb[1]	0		
ra-PreambleIndex[1]	40		
}			
ra-ssb-OccasionMaskIndex	1		
}			
}			
}			
}			

6.3.4.1.5 Test requirements

Table 6.3.4.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.4.1.5-1: Cell specific test parameters for NR FR1-FR1 Intra frequency cell switch test case

Parameter		Unit	Cell 1	Cell 2
			T1~T4	T1~T4
NR RF Channel Number			1	1
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
CP length			Normal	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Patterns			OP.1	
SMTC Configuration			SMTC.1	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15	
	Config 3		30	
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15	
	Config 3		30	
PRACH configuration			FR1 PRACH configuration 6	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98	
	Config 3		-95	
$\hat{E}_s / I_{ot}$		dB	-0.64	-0.64 -0.64 -0.64

$\hat{E}_s / N_{oc}$		dB	8	8	8	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-90	-90
	Config 3	dBm/SCS	-87	-87	-87	-87
Io[Note3]	Config 1,2	dBm/ 9.36MHz	-58.7	-58.7	-58.7	-58.7
	Config 3	dBm/ 38.16MHz	-52.6	-52.6	-52.6	-52.6
Propagation condition		-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The UE shall start to transmit the PRACH to Cell 2 in no later than D_{LTM} from the beginning of time period T4. The rate of correct cell switches observed during repeated tests shall be at least 90%.

NOTE: The cell switch delay can be expressed as D_{LTM} (= T_{cmd} + $T_{LTM\text{-}interrupt}$), where:

T_{cmd} = T_{HARQ} + 3ms and is specified in 38.133 [6] clause 6.3.1.2. $T_{LTM\text{-}interrupt}$ = $T_{LTM\text{-}RRC\text{-}processing}$ + $T_{LTM\text{-}processing}$ + $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$ + $T_{LTM\text{-}IU}$ ms and is specified in 38.133 [6] clause 6.3.1.2.1

- $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$= 0 ms for Test 1A and 1B, $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$= 22 ms for Test 2A and 2B
- $T_{LTM\text{-}IU_}$=20ms
- $T_{LTM\text{-}RRC\text{-}processing}$ =10 ms if UE does not support *ltm-FastProcessingConfig-r18*, otherwise $T_{LTM\text{-}RRC\text{-}processing}$ =0ms
- $T_{LTM\text{-}processing}$ =10 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 10 ms for FR1-to-FR1 cell switch in the capability
- $T_{LTM\text{-}processing}$ =15 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 15 ms for FR1-to-FR1 cell switch in the capability
- $T_{LTM\text{-}processing}$ =20 ms if the UE does not support *ltm-FastUE-Processing-r18* capability.

6.3.4.2 NR SA FR1 RACH-based Inter-frequency LTM PCell switch from FR1 to FR1

6.3.4.2.1 Test purpose

To verify the UE's ability to perform NR FR1-NR FR1 FR1 RACH-based inter frequency PCell switch specified in 38.133 [6] clause 6.3.1 for both with and without early TCI state activation.

6.3.4.2.2 Test applicability

This test applies to all types of NR UEs supporting NR LTM for MCG with RACHwith L1-RSRP measurement and report based on SSB(s) of candidate cell(s) from Release 18 onwards.

The test consists of 4 tests, and UE is required to pass one among Test 1A, Test 1B, Test 2A and Test 2B.

- Test 1: for a UE supporting *ltm-MAC-CE-JointTCI-r18 and/or ltm-MAC-CE-SeparateTCI-r18*
  - Test 1A: for a UE supporting *ltm-MAC-CE-JointTCI-r18*.
  - Test 1B: for a UE supporting *ltm-MAC-CE-SeparateTCI-r18* and does not support *ltm-MAC-CE-JointTCI-r18*.
- Test 2: for a UE not supporting *ltm-MAC-CE-JointTCI-r18 and ltm-MAC-CE-SeparateTCI-r18*
  - Test 2A: for a UE supporting *ltm-BeamIndicationJointTCI-r18*.
  - Test 2B: for a UE supporting *ltm-BeamIndicationSeparateTCI-r18* and does not support *ltm-BeamIndicationJointTCI-r18*.

6.3.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.4.2.

6.3.4.2.4 Test description

6.3.4.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.4.2.4.1-1.

Table 6.3.4.2.4.1-1: Inter-frequency cell switch from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.4.2.4.1-2

Table 6.3.4.2.4.1-2: Initial conditions for NR SA FR1 handover with known target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.4.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.3.4.2.4.1-3.
2. Message contents are defined in clause 6.3.4.2.4.3.
3. Two cells are deployed in the test, which are FR1 PCell(Cell 1) and FR1 neighbour cell (Cell 2) on the different frequency than the PCell. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 6.3.4.2.4.1-3: General test parameters for Inter-frequency cell switch from FR1 to FR1

Parameter		Unit	Value				Comment
			Test 1A	Test 1B	Test 2A	Test 2B	
Initial conditions	Active cell		Cell 1				
	Neighbouring cell		Cell 2				Cell 2 is the candidate cell
Final condition	Active cell		Cell 2				
A3-Offset		dB	-7				Original Value -6dB, post TT Analysis, its -7 dB
Hysteresis		dB	0				
Time To Trigger		s	0				

Filter coefficient			0				L3 filtering is not used
maxNrofRS-IndexesToReport			1				
includeBeamMeasurements			True				
DRX			OFF				DRX is not used
Measurement gap pattern ID			gp0				As specified in Table 9.1.2-1
Measurement gap offset			39				
Access Barring Information		-	Not Sent				No additional delays in random access procedure.
Time offset between cells			2 μs				
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	80				Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1				Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1				
	spCellInclusion		N/A				
ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		Candidate DLorJoint TCI.State.0	Candidate DLorJoint TCI.State.2	Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	As specified in clause A.3.16B. In test 1A and 1B, CandidateTCI-State#1 and CandidateTCI-UL-State#1 are configured for early TCI state activation.
	CandidateTCI-State#2		Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	N/A	N/A	
[ltm-UL-TCI-StatesToAddModList]	CandidateTCI-UL-State#1		N/A	Candidate UL TCI.State.0	N/A	Candidate UL TCI.State.0	CandidateTCI-State#2 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command. In test 2A and 2B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command.
ltm-ConfigComplete			True				Candidate cell's configuration is complete configuration
T1		s	<3				
T2		s	≤0.2				
T3		s	≤0.2				
T4		s	≤0.1				

6.3.4.2.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the different frequency than the PCell. Test configurations are given in table 6.3.4.2.4.1-1. Both cell switch delay and interruption length are tested by using the parameters in table 6.3.4.2.4.1-2, and 6.3.4.2.4.1-2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 6.3.4.2.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. SS shall transmit an RRCReconfiguration message, configuring measurement object.

4. UE shall transmit RRCReconfigurationComplete message.

5. If the UE transmit an A3 message report, the SS shall switch the power setting from T1 to T2 as specified in Table 6.3.4.2.5-1. T2 starts.

6. At the start of T2, the SS shall transmit an *RRCReconfiguration* message with *LTM-Candidate-r18* for Cell2 and SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports on candidate cell (Cell 2) in PUCCH format 2.

7. UE shall transmit RRCReconfigurationComplete message.

8. If the UE transmits a valid L1-RSRP result of Cell2:

   Test 1A and 1B: The SS shall switch the power setting from T2 to T3 as specified in Table 6.3.4.2.5-1. T3 starts.

   Test 2A and 2B: T3 is skipped. The SS shall switch the power setting from T2 to T4 as specified in Table 6.3.4.2.5-1. T4 starts, go to step10.

9. At the start of T3, the SS shall transmit the candidate cell TCI activation MAC-CE (Refer TS 38.321 [12], clauses 6.1.3.76) for Cell2. 100ms after the candidate cell TCI state activation MAC-CE transmission, the SS shall switch the power setting from T3 to T4 as specified in Table 6.3.4.2.5-1. T4 starts.

   candidate cell TCI activation MAC-CE:

   - Test 1A: *CandidateTCI-State#1* is activated.

   - Test 1B: *CandidateTCI-State#1* and *CandidateTCI-UL-State#1* is activated.

10. The start of T4 is the instant when the last TTI containing the LTM cell switch command MAC CE(Refer TS 38.321 [12], clauses 6.1.3.75) is sent by Cell1 to the UE.

    cell switch MAC-CE:

    - Contention-Free Random-Access Resources are indicated and the field of Timing Advance Command is set to FFF

    - Test 1A: CandidateTCI-State#2 is indicated.

    - Test 1B: CandidateTCI-State#2 and CandidateTCI-UL-State#1 are indicated

    - Test 2A: CandidateTCI-State#1 is indicated.

- Test 2B: CandidateTCI-State#1 and CandidateTCI-UL-State#1 are indicated

11. If the UE transmits the uplink PRACH channel to Cell 2 less than D_{LTM} from the beginning of time period T4 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.T4 ends.

12. After T4 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync*, which includes the release of *LTM-Config-r18* to cause UE handover back to Cell 1.

13. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1

14. Power off Cell2 and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop.

15. Repeat steps 2-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.3.4.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1, SMTC pattern 1 for configuration 1 and 2 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.2 FR1, SMTC pattern 1 for configuration 3 Table H.3.1-5 with Condition SSB Index Table H.3.1-7 with Condition INTER-FREQ and SSB Index

Table 6.3.4.2.4.3-2: Common Exception messages (step 6)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.12.1 with Condition LTM L1-RSRP Table H 3.12-2 with Condition LTM L1-RSRP Table H.3.12-3 for Cell 2 and Condition Candidate config and TCI_INFO Table H.3.12.4 Table H.3.12-5 with pucch-ResourceId = 8 Table H.3.12-6, H.3.12-7 abd H.3.12-13 with SSB index = 0 Table H.3.12-8 Table H.3.12-9 for CELL2 Table H.3.12-10 with Condition Joint AND Early DL Sync for test 1A Table H.3.12-10 with Condition Seperate for test 1B and 2B Table H.3.12-10 with Condition Joint for test 2A Table H.3.12-11

Table 6.3.4.2.4.3-3: ReportConfigNR (step3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A3			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-14	The actual value is field value * 0.5 dB	
}			
hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
reportQuantity-RsIndexes SEQUENCE {			
rsrp	true		
}			
maxReportCells	1		
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	true		

}			
}			
}			

Table 6.3.4.2.4.3-4 *RACH-ConfigCommon* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric specified in TS 38.508-1 [14] Table 7.3.1-14 with condition FR1		
totalNumberOfRA-Preambles	48		
rsrp-ThresholdSSB	RSRP_51		
prach-RootSequenceIndex CHOICE {			
0			
}			
msg1-SubcarrierSpacing	kHz 15		Config 1, 2
	kHz 30		Config 3
}			

Table 6.3.4.2.4.3-5: *RACH-ConfigDedicated* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	1 entry		
ssb[1]	0		
ra-PreambleIndex[1]	40		
}			
ra-ssb-OccasionMaskIndex	1		
}			
}			
}			
}			

6.3.4.2.5 Test requirements

Table 6.3.4.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.4.2.5-1: Cell specific test parameters for NR FR1-FR1 Inter frequency cell switch test case

Parameter		**Unit**	**Cell 1**	**Cell 2**
			T1-T4	**T1-T4**
NR RF Channel Number			1	2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	

	Config 3		40: $N_{RB,c}$ = 106	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
TRS configuration for serving cell	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Patterns			OP.1	
SMTC Configuration			SMTC.1	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15	
	Config 3		30	
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15	
	Config 3		30	
PRACH configuration			FR1 PRACH configuration 6	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98	
	Config 3		-95	
$\hat{E}_s / I_{ot}$		dB	8	8
$\hat{E}_s / N_{oc}$		dB	8	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90
	Config 3	dBm/SCS	-87	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-61.41	-61.41
	Config 3	dBm/ 38.16MHz	-55.31	-55.31
Propagation condition		-	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 in no later than D_{LTM} from the beginning of time period T4. The rate of correct cell switches observed during repeated tests shall be at least 90%.

NOTE: The cell switch delay can be expressed as D_{LTM} (= T_{cmd} + $T_{LTM-interrupt}$), where:

T_{cmd} = T_{HARQ} + 3ms and is specified in 38.133 [6] clause 6.3.1.2. $T_{LTM-interrupt}$ = $T_{LTM-RRC-processing}$ + $T_{LTM-processing}$ + $T_{first-RS}$ + $T_{RS-proc}$ + T_{LTM-IU} ms and is specified in 38.133 [6] clause 6.3.1.2.1

- $T_{first-RS}$ + $T_{RS-proc}$= 0 ms for Test 1A and 1B, $T_{first-RS}$ + $T_{RS-proc}$= 22 ms for Test 2A and 2B
- $T_{LTM-IU_}$=20ms
- $T_{LTM-RRC-processing}$ =10 ms if UE does not support *ltm-FastProcessingConfig-r18*, otherwise $T_{LTM-RRC-processing}$ =0ms
- $T_{LTM-processing}$ =10 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 10 ms for FR1-to-FR1 cell switch in the capability
- $T_{LTM-processing}$ =15 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 15 ms for FR1-to-FR1 cell switch in the capability
- $T_{LTM-processing}$ =20 ms if the UE does not support *ltm-FastUE-Processing-r18* capability.

6.3.4.3 NR SA FR1 RACH-less Intra-frequency PCell switch from FR1 to FR1

6.3.4.3.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 RACH-less intra-frequency Pcell switch specified in 38.133 [6] clause 6.3.1, including cell switch delay and interruption length, for both with and without early TCI state activation.

6.3.4.3.2 Test applicability

This test applies to all NR UEs supporting NR LTM for MCG with RACH-less with L1-RSRP measurement and report from Release 18 onwards, and with optional support for *rach-EarlyTA-Measurement-r18*. The test consists of four parts, and the UE is required to pass one among Test 1A, Test 1B, Test 2A and Test 2B:

- Test 1: for a UE that supports *ltm-MAC-CE-JointTCI-r18* and/or *ltm-MAC-CE-SeparateTCI-r18*
  - Test 1A: for a UE that supports *ltm-MAC-CE-JointTCI-r18*.
  - Test 1B: for a UE that supports *ltm-MAC-CE-SeparateTCI-r18* and does not support *ltm-MAC-CE-JointTCI-r18*.
- Test 2: for a UE that does not supports *ltm-MAC-CE-JointTCI-r18* and *ltm-MAC-CE-SeparateTCI-r18*
  - Test 2A: for a UE that supports *ltm-BeamIndicationJointTCI-r18*.
  - Test 2B: for a UE that supports *ltm-BeamIndicationSeparateTCI-r18* and does not support *ltm-BeamIndicationJointTCI-r18.*

6.3.4.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.4.3.

6.3.4.3.4 Test description

6.3.4.3.4.1 Initial conditions

Initial conditions are a set of test configurations that the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.4.3.4.1-1.

Table 6.3.4.3.4.1-1: Intra-frequency cell switch from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.4.3.4.1-2.

Table 6.3.4.3.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.4.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.3.4.3.4.1-3.
2. Message contents are defined in clause 6.3.4.3.4.3.
3. Two cells are deployed in the test, which are FR1 Pcell (Cell 1) and FR1 neighbour cell (Cell 2) on the same frequency as the Pcell. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 6.3.4.3.4.1-3: General test parameters for Intra-frequency cell switch from FR1 to FR1

Parameter		Unit	Value				Comment
			Test 1A	Test 1B	Test 2A	Test 2B	
Initial conditions	Active cell		Cell 1				
	Neighbouring cell		Cell 2				Cell 2 is the candidate cell
Final condition	Active cell		Cell 2				
A3-Offset		dB	-6				
Hysteresis		dB	0				
Time To Trigger		s	0				
Filter coefficient			0				L3 filtering is not used
includeBeamMeasurements			TRUE				
DRX			OFF				DRX is not used
Access Barring Information		-	Not Sent				No additional delays in random access procedure.
Time offset between cells			2 μs				RTD between cells is less than CP
deriveSSB-IndexFromCell			Enabled				
EarlyUL-SyncConfig	frequencyInfoUL		NR RF Channel Number 1				Same as Cell 1
	PRACH configuration		PRACH.5 FR1				RACH bandwidth is within active UL BWP of Cell 1
	bwp-GenericParameters		ULBWP.0.1				
	n-TimingAdvanceOffset	Tc	25600				
ltm-CSI-SSB-ResourceList			SSB 0 of Cell 2				
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	80				Periodic L1-RSRP reporting configured

	nrOfReportedCells		n1				Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1				
	spCellInclusion		N/A				
ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		Candidate DlorJoint TCI.State.0	Candidate DLorJoint TCI.State.2	Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	As specified in clause A.10B. In test 1A and 1B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for early TCI state activation. CandidateTCI-State#2 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command. In test 2A and 2B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command.
	CandidateTCI-State#2		Candidate DlorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	N/A	N/A	
ltm-UL-TCI-StatesToAddModList	CandidateTCI-UL-State#1		N/A	Candidate UL TCI.State.0	N/A	Candidate UL TCI.State.0	
ltm-ConfigComplete			True				Candidate cell's configuration is complete configuration
T1		s	<3				
T2		s	≤0.2				
T3		s	≤0.1				
T4		s	≤0.2				
T5		s	≤0.1				

6.3.4.3.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. Test configurations are given in Table 6.3.4.3.4.1-1. No measurement gap is configured in the test case.

Both cell switch delay and interruption length are tested by using the parameters in table 6.3.4.3.4.1-2, and 6.3.4.3.4.1-3.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5, respectively.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRCReconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 6.3.4.3.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message to configure event A3 triggered measurement reporting on the intra-frequency carrier of Cell 2 for Test 1A, 1B, 2A and 2B.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. The UE shall transmit a *MeasurementReport* message triggered by Event A3. T1 ends with UE reporting an L3 measurement result of Cell2 to Cell 1.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 6.3.4.3.5-1. T2 starts.

7. At the start of T2, the SS shall transmit an *RRCReconfiguration* message with *LTM-Candidate-r18* for Cell 2, and SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports for Cell 2 in PUCCH format 2 for Test 1A, 1B, 2A and 2B.

8. The UE shall transmit *RRCReconfigurationComplete* message.

9. T2 ends with UE reporting a valid L1-RSRP result of Cell 2.

   - Test 1A and 1B: The SS shall switch the power setting from T2 to T3 as specified in Table 6.3.4.3.5-1. T3 starts.

   - Test 2A and 2B: T3 is skipped. The SS shall switch the power setting from T2 to T4 as specified in Table 6.3.4.3.5-1 if the UE is capable of *rach-EarlyTA-Measurement-r18*. T4 starts, go to step12. Otherwise, the SS shall switch the power setting from T2 to T5 as specified in Table 6.3.4.3.5-1. T5 starts, go to step14.

10. At the start of T3, the SS shall transmit a Candidate Cell TCI States Activation MAC-CE (Refer to TS 38.321 [12], clauses 5.18.36, 6.1.3.76) of Cell 2.

    - In Test 1A, *CandidateTCI-State#1* is activated.

    - In Test 1B, *CandidateTCI-State#1* and *CandidateTCI-UL-State#1* are activated.

11. T3 ends 50ms after the candidate cell TCI state activation MAC CE transmission. And the SS shall switch the power setting from T3 to T4 as specified in Table 6.3.4.3.5-1. T4 starts.

    - For the UE that incapable of *rach-EarlyTA-Measurement-r18*, T4 is skipped. The SS shall switch the power setting from T3 to T5 as specified in Table 6.3.4.3.5-1. T5 starts, go to step14.

12. At the start of T4, the SS shall transmit a PDCCH order (Refer to TS 38.213 [8], clause 21, and TS 38.212 [31], clause 7.3.1.2.1) to trigger the UE to transmit the PRACH on Cell 2 for Test 1A, 1B, 2A and 2B.

13. T4 ends 5ms after the UE transmits the PRACH to Cell 2. And the SS shall switch the power setting from T4 to T5 as specified in Table 6.3.4.3.5-1. T5 starts.

14. The start of T5 is the instant when the last TTI containing the LTM Cell Switch Command MAC-CE (Refer to TS 38.321 [12], clauses 5.18.35, 6.1.3.75) is sent by Cell 1 to trigger UE switches to Cell 2 for Test 1A, 1B, 2A and 2B. T5 starts.

    - In the cell switch MAC-CE:

      - The target cell is Cell 2.

      - Timing Advance Command is set to 0.

      - In test 1A, *CandidateTCI-State#2* is indicated.

      - In test 1B, *CandidateTCI-State#2* and *CandidateTCI-UL-State#1* are indicated.

      - In test 2A, *CandidateTCI-State#1* is indicated.

      - In test 2B, *CandidateTCI-State#1* and *CandidateTCI-UL-State#1* are indicated.

    - Cell 2 continuously schedules PUSCH for the UE.

15. T5 ends either at the UL slot of PUSCH scheduled by Cell 2 at the first DL slot not earlier than (T_{cmd} + $T_{LTM\text{-}RRC\text{-}processing}$ + $T_{LTM\text{-}processing}$ + $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$) after the beginning of T5 or upon the reception of PUSCH at Cell 2, whichever is earlier. The values of T_{cmd}, $T_{LTM\text{-}RRC\text{-}processing}$ $T_{LTM\text{-}processing}$, $T_{first\text{-}RS}$ and $T_{RS\text{-}proc}$ are specified in 6.3.4.3.5.

16. If the UE transmits PUSCH to Cell 2 in less than D_{LTM} (= T_{cmd} + $T_{LTM\text{-}interrupt}$) ms from the beginning of time period T5, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

17. After T5 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync*, which includes the release of *LTM-Config-r18*, to cause UE handover back to Cell 1.

18. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure

the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 on Cell 1.

19. Power off Cell2 and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop. Upon setting the new physical cell identity for Cell 2, power on Cell 2 to ensure Cell 2 is available for the following test steps.

20. Repeat steps 2-19 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.4.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clauses 4.6 and 7.3 with the following exceptions:

Table 6.3.4.3.4.3-1: Common Exception messages (Step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 1 and Synchronous cells for Config 1 and 2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC pattern 1 and Synchronous cells for Config 3 Table H.3.1-4 with A3-offset = -6dB and includeBeamMeasurements = True and with Condition SSB Index Table H.3.1-5 with Condition SSB Index Table H.3.1-7 with Condition INTRA-FREQ and SSB Index PDCCH configuration: Table A.1.3.1-1 CCR.1.2 FDD for test 1, Table A.1.3.2-1 CCR.1.2 TDD for test 2 and Table A.1.3.2-2 CCR.2.4 TDD for test 3 with following exceptions: aggregation level = 16, allocated RB = 48

Table 6.3.4.3.4.3-2: Common Exception messages (Step 7)

Default Message Contents	
Default RRC messages and information elements contents exceptions	Table H.3.12-1 with Condition L1-RSRP Table H.3.12-2 with Condition L1-RSRP Table H.3.12-3 for Cell 2 with Condition Candidate Config, TA_PDCCH-ORDER, TCI_INFO Table H.3.12-4 Table H.3.12-5 for Cell 1 with pucch-ResourceId = 8 Table H.3.12-6, Table H.3.12-7 and Table H.3.12-13 with SSB-Index = 0 Table H.3.12-8 Table H.3.12-9 for Cell 2 Table H.3.12-10 with Condition Joint AND Early DL Sync for Test 1A Table H.3.12-10 with Condition Separate for Test 1B and Test 2B Table H.3.12-10 with Condition Joint for Test 2A Table H.3.12-11 Table H.3.12-12 for Cell 2 with l139 = 0

Table 6.3.4.3.4.3-3 *RACH-ConfigCommon* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric specified in TS 38.508-1 [14] Table 7.3.1-14 with condition FR1		
totalNumberOfRA-Preambles	48		
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n16		
}			

rsrp-ThresholdSSB	RSRP_51		
prach-RootSequenceIndex CHOICE {			
0			
}			
msg1-SubcarrierSpacing	kHz 15		Config 1, 2
	kHz 30		Config 3
}			

Table 6.3.4.3.4.3-4: *RACH-ConfigDedicated* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	1 entry		
ssb[1]	0		
ra-PreambleIndex[1]	40		
}			
ra-ssb-OccasionMaskIndex	1		
}			
}			
}			
}			

6.3.4.3.5 Test requirement

Table 6.3.4.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.4.3.5-1: Cell specific test parameters for NR FR1-FR1 Intra frequency cell switch

Parameter		**Unit**	**Cell 1**	**Cell 2**
			T1~T5	**T1~T5**
NR RF Channel Number			1	1
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
DRx Cycle		Ms	Not Applicable	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Patterns			OP.1	

SMTC Configuration			SMTC.1	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15	
	Config 3		30	
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15	
	Config 3		30	
PRACH configuration			FR1 PRACH configuration 6	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98	
	Config 3		-95	
$\hat{E}_s / I_{ot}$		dB	-0.64	-0.64
$\hat{E}_s / N_{oc}$		dB	8	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90
	Config 3	dBm/SCS	-87	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.7	-58.7
	Config 3	dBm/ 38.16MHz	-52.6	-52.6
Propagation condition		-	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit PUSCH to Cell 2 in no later than D_{LTM} from the beginning of time period T5.
The rate of correct cell switches observed during repeated tests shall be at least 90%.

NOTE: The cell switch delay can be expressed as D_{LTM} (= T_{cmd} + $T_{LTM\text{-}interrupt}$), where:

T_{cmd} = T_{HARQ} + 3ms, as specified in TS 38.133 [6] clause 6.3.1.2. $T_{LTM\text{-}interrupt}$ = $T_{LTM\text{-}RRC\text{-}processing}$ + $T_{LTM\text{-}processing}$ + $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$ + $T_{LTM\text{-}IU}$ is defined in TS 38.133 [6] clause 6.3.1.3.

- $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$=0 for Test 1A and 1B, $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$=22ms for Test 2A and 2B.
- $T_{LTM\text{-}IU}$ is the uncertainty in transmitting the first uplink transmission on Cell 2.
- $T_{LTM\text{-}RRC\text{-}processing}$ = 10 ms if the UE does not support *ltm-FastProcessingConfig-r18*, otherwise $T_{LTM\text{-}RRC\text{-}processing}$ =0ms

- $T_{LTM-processing}$ = 10 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 10 ms for FR1-to-FR1 cell switch in the capability

- $T_{LTM-processing}$ = 15 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 15 ms for FR1-to-FR1 cell switch in the capability

- $T_{LTM-processing}$ = 20 ms if the UE does not support *ltm-FastUE-Processing-r18* capability.

6.3.4.4 NR SA FR1 RACH-less Intra-frequency PCell switch from FR1 to FR1 without L1-RSRP measurement

6.3.4.4.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 RACH-less intra-frequency Pcell switch specified in 38.133 [6] clause 6.3.1 without L1-RSRP measurement and measurement reporting, including cell switch delay and interruption length.

6.3.4.4.2 Test applicability

This test applies to all NR UEs supporting NR LTM for MCG with RACH-less without L1-RSRP measurement and report from Release 18 onwards, and with optional support for *rach-EarlyTA-Measurement-r18*. The test consists of four parts, and the UE is required to pass one among Test 1A, Test 1B, Test 2A and Test 2B:

- Test 1: for a UE that supports *ltm-MAC-CE-JointTCI-r18* and/or *ltm-MAC-CE-SeparateTCI-r18*

  - Test 1A: for a UE that supports *ltm-MAC-CE-JointTCI-r18*.

  - Test 1B: for a UE that supports *ltm-MAC-CE-SeparateTCI-r18* and does not support *ltm-MAC-CE-JointTCI-r18*.

- Test 2: for a UE that does not supports *ltm-MAC-CE-JointTCI-r18* and *ltm-MAC-CE-SeparateTCI-r18*

  - Test 2A: for a UE that supports *ltm-BeamIndicationJointTCI-r18*.

  - Test 2B: for a UE that supports *ltm-BeamIndicationSeparateTCI-r18* and does not support *ltm-BeamIndicationJointTCI-r18.*

6.3.4.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.3.4.4.

6.3.4.4.4 Test description

6.3.4.4.4.1 Initial conditions

Initial conditions are a set of test configurations that the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.4.4.4.1-1.

Table 6.3.4.4.4.1-1: Intra-frequency cell switch from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.4.4.4.1-2.

Table 6.3.4.4.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.4.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable Ues without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.3.4.4.4.1-3.
2. Message contents are defined in clause 6.3.4.4.4.3.
3. Two cells are deployed in the test, which are FR1 Pcell (Cell 1) and FR1 neighbour cell (Cell 2) on the same frequency as the Pcell. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 6.3.4.4.4.1-3: General test parameters for Intra-frequency cell switch from FR1 to FR1

Parameter		Unit	Value				Comment
			Test 1A	Test 1B	Test 2A	Test 2B	
Initial conditions	Active cell		Cell 1				
	Neighbouring cell		Cell 2				Cell 2 is the candidate cell
Final condition	Active cell		Cell 2				
A3-Offset		dB	-6				
Hysteresis		dB	0				
Time To Trigger		s	0				
Filter coefficient			0				L3 filtering is not used
includeBeamMeasurements			TRUE				
DRX			OFF				DRX is not used
Access Barring Information		-	Not Sent				No additional delays in random access procedure.
Time offset between cells			2 µs				RTD between cells is less than CP
deriveSSB-IndexFromCell			Enabled				
EarlyUL-SyncConfig	frequencyInfoUL		NR RF Channel Number 1				Same as Cell 1
	PRACH configuration		PRACH.5 FR1				RACH bandwidth is within active UL BWP of Cell 1
	bwp-GenericParameters		ULBWP.0.1				
	n-TimingAdvanceOffset	Tc	25600				
ltm-CSI-SSB-ResourceList			SSB 0 of Cell 2				

ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		Candidate DLorJoint TCI.State.0	Candidate DLorJoint TCI.State.2	Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	As specified in clause A.10B. In test 1A and 1B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for early TCI state activation. CandidateTCI-State#2 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command. In test 2A and 2B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command.
	CandidateTCI-State#2		Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	N/A	N/A	
ltm-UL-TCI-StatesToAddModList	CandidateTCI-UL-State#1		N/A	Candidate UL TCI.State.0	N/A	Candidate UL TCI.State.0	
ltm-ConfigComplete			True				Candidate cell's configuration is complete configuration
T1		s	<3				
T2		s	≤0.2				
T3		s	≤0.1				
T4		s	≤0.2				
T5		s	≤0.1				

6.3.4.4.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. Test configurations are given in Table 6.3.4.4.4.1-1. No measurement gap is configured in the test case.

Both cell switch delay and interruption length are tested by using the parameters in table 6.3.4.4.4.1-2, and 6.3.4.4.4.1-3.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5, respectively.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRCReconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 6.3.4.4.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message to configure event A3 triggered measurement reporting on the intra-frequency carrier of Cell 2 for Test 1A, 1B, 2A and 2B.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. The UE shall transmit a *MeasurementReport* message triggered by Event A3. T1 ends with UE reporting an L3 measurement result of Cell2 to Cell 1.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 6.3.4.4.5-1. T2 starts.

7. At the start of T2, the SS shall transmit an *RRCReconfiguration* message with *LTM-Candidate-r18* for Cell 2 for Test 1A, 1B, 2A and 2B.

8. The UE shall transmit *RRCReconfigurationComplete* message.

9. When T2 expires,

   - Test 1A and 1B: The SS shall switch the power setting from T2 to T3 as specified in Table 6.3.4.4.5-1. T3 starts.

   - Test 2A and 2B: T3 is skipped. The SS shall switch the power setting from T2 to T4 as specified in Table 6.3.4.4.5-1 if the UE is capable of *rach-EarlyTA-Measurement-r18*. T4 starts, go to step12. Otherwise, the SS shall switch the power setting from T2 to T5 as specified in Table 6.3.4.4.5-1. T5 starts, go to step14.

10. At the start of T3, the SS shall transmit a Candidate Cell TCI States Activation MAC-CE (Refer to TS 38.321 [12], clauses 5.18.36, 6.1.3.76) of Cell 2.

    - In Test 1A, *CandidateTCI-State#1* is activated.

    - In Test 1B, *CandidateTCI-State#1* and *CandidateTCI-UL-State#1* are activated.

11. T3 ends 50ms after the candidate cell TCI state activation MAC CE transmission. And the SS shall switch the power setting from T3 to T4 as specified in Table 6.3.4.4.5-1. T4 starts.

    - For the UE that incapable of *rach-EarlyTA-Measurement-r18*, T4 is skipped. The SS shall switch the power setting from T3 to T5 as specified in Table 6.3.4.4.5-1. T5 starts, go to step14.

12. At the start of T4, the SS shall transmit a PDCCH order (Refer to TS 38.213 [8], clause 21, and TS 38.212 [31], clause 7.3.1.2.1) to trigger the UE to transmit the PRACH on Cell 2 for Test 1A, 1B, 2A and 2B.

13. T4 ends 5ms after the UE transmits the PRACH to Cell 2. And the SS shall switch the power setting from T4 to T5 as specified in Table 6.3.4.4.5-1. T5 starts.

14. The start of T5 is the instant when the last TTI containing the LTM Cell Switch Command MAC-CE (Refer to TS 38.321 [12], clauses 5.18.35, 6.1.3.75) is sent by Cell 1 to trigger UE switches to Cell 2 for Test 1A, 1B, 2A and 2B. T5 starts.

    - In the cell switch MAC-CE:

      - The target cell is Cell 2.

      - Timing Advance Command is set to 0.

      - In test 1A, *CandidateTCI-State#2* is indicated.

      - In test 1B, *CandidateTCI-State#2* and *CandidateTCI-UL-State#1* are indicated.

      - In test 2A, *CandidateTCI-State#1* is indicated.

      - In test 2B, *CandidateTCI-State#1* and *CandidateTCI-UL-State#1* are indicated.

    - Cell 2 continuously schedules PUSCH for the UE.

15. T5 ends either at the UL slot of PUSCH scheduled by Cell 2 at the first DL slot not earlier than (T_{cmd} + $T_{LTM\text{-}RRC\text{-}processing}$ + $T_{LTM\text{-}processing}$ + $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$) after the beginning of T5 or upon the reception of PUSCH at Cell 2, whichever is earlier. The values of T_{cmd}, $T_{LTM\text{-}RRC\text{-}processing}$ $T_{LTM\text{-}processing}$, $T_{first\text{-}RS}$ and $T_{RS\text{-}proc}$ are specified in 6.3.4.4.5.

16. If the UE transmits PUSCH to Cell 2 in less than D_{LTM} (= T_{cmd} + $T_{LTM\text{-}interrupt}$) ms from the beginning of time period T5, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

17. After T5 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync*, which includes the release of *LTM-Config-r18*, to cause UE handover back to Cell 1.

18. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 on Cell 1.

19. Power off Cell2 and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop. Upon setting the new physical cell identity for Cell 2, power on Cell 2 to ensure Cell 2 is available for the following test steps.

20. Repeat steps 2-19 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.3.4.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clauses 4.6 and 7.3 with the following exceptions:

Table 6.3.4.4.4.3-1: Common Exception messages (Step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 1 and Synchronous cells for Config 1 and 2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC pattern 1 and Synchronous cells for Config 3 Table H.3.1-4 with A3-offset = -6dB and includeBeamMeasurements = True and with Condition SSB Index Table H.3.1-5 with Condition SSB Index Table H.3.1-7 with Condition INTRA-FREQ and SSB Index PDCCH configuration: Table A.1.3.1-1 CCR.1.2 FDD for test 1, Table A.1.3.2-1 CCR.1.2 TDD for test 2 and Table A.1.3.2-2 CCR.2.4 TDD for test 3 with following exceptions: aggregation level = 16, allocated RB = 48

Table 6.3.4.4.4.3-2: Common Exception messages (Step 7)

Default Message Contents	
Default RRC messages and information elements contents exceptions	Table H.3.12-1 Table H.3.12-2 Table H.3.12-3 for Cell 2 with Condition Candidate Config, TA_PDCCH-ORDER, TCI_INFO Table H.3.12-4 Table H.3.12-5 for Cell 1 with pucch-ResourceId = 8 Table H.3.12-6, Table H.3.12-7 and Table H.3.12-13 with SSB-Index = 0 Table H.3.12-8 Table H.3.12-9 for Cell 2 Table H.3.12-10 with Condition Joint AND Early DL Sync for Test 1A Table H.3.12-10 with Condition Separate for Test 1B and Test 2B Table H.3.12-10 with Condition Joint for Test 2A Table H.3.12-11 Table H.3.12-12 for Cell 2 with I139 = 0

Table 6.3.4.4.4.3-3: *RACH-ConfigCommon* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric specified in TS 38.508-1		

	[14] Table 7.3.1-14 with condition FR1		
totalNumberOfRA-Preambles	48		
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n16		
}			
rsrp-ThresholdSSB	RSRP_51		
prach-RootSequenceIndex CHOICE {			
0			
}			
msg1-SubcarrierSpacing	kHz 15		Config 1, 2
	kHz 30		Config 3
}			

Table 6.3.4.4.4.3-4: *RACH-ConfigDedicated* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	1 entry		
ssb[1]	0		
ra-PreambleIndex[1]	40		
}			
ra-ssb-OccasionMaskIndex	1		
}			
}			
}			
}			

6.3.4.4.5 Test requirement

Table 6.3.4.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.4.4.5-1: Cell specific test parameters for NR FR1-FR1 Intra frequency cell switch

Parameter		Unit	Cell 1	Cell 2
			T1~T5	T1~T5
NR RF Channel Number			1	1
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	

	Config 3		CR2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Patterns			OP.1	
SMTC Configuration			SMTC.1	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15	
	Config 3		30	
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15	
	Config 3		30	
PRACH configuration			PRACH.6 FR1	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98	
	Config 3		-95	
$\hat{E}_s / I_{ot}$		dB	-0.64	-0.64
$\hat{E}_s / N_{oc}$		dB	8	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90
	Config 3	dBm/SCS	-87	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.7	-58.7
	Config 3	dBm/ 38.16MHz	-52.6	-52.6
Propagation condition		-	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit PUSCH to Cell 2 in no later than D_{LTM} from the beginning of time period T5.
The rate of correct cell switches observed during repeated tests shall be at least 90%.

NOTE: The cell switch delay can be expressed as D_{LTM} (= T_{cmd} + $T_{LTM\text{-}interrupt}$), where:

T_{cmd} = T_{HARQ} + 3ms, as specified in TS 38.133 [6] clause 6.3.1.2. $T_{LTM\text{-}interrupt}$ = $T_{LTM\text{-}RRC\text{-}processing}$ + $T_{LTM\text{-}processing}$ + $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$ + $T_{LTM\text{-}IU}$ is defined in TS 38.133 [6] clause 6.3.1.3.

- $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$=0 for Test 1A and 1B, $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$=22ms for Test 2A and 2B.
- $T_{LTM\text{-}IU}$ is the uncertainty in transmitting the first uplink transmission on Cell 2.

- $T_{LTM\text{-}RRC\text{-}processing}$ = 10 ms if the UE does not support *ltm-FastProcessingConfig-r18*, otherwise $T_{LTM\text{-}RRC\text{-}processing}$ =0ms
- $T_{LTM\text{-}processing}$ = 10 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 10 ms for FR1-to-FR1 cell switch in the capability
- $T_{LTM\text{-}processing}$ = 15 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 15 ms for FR1-to-FR1 cell switch in the capability
- $T_{LTM\text{-}processing}$ = 20 ms if the UE does not support *ltm-FastUE-Processing-r18* capability.

6.3.5 LTM PSCell Switch

6.3.5.0 Minimum conformance requirements

6.3.5.0.1 Minimum conformance requirements for LTM PCell Switch

LTM cell switch delay D_{LTM} is the delay from the end of the last TTI containing the MAC-CE command for cell switch until the time the UE transmits the first UL message on the target cell.

The requirements in this section apply when

- the target cell is known, and
- the target joint UL/DL TCI state or separate UL and DL TCI states in the MAC-CE LTM cell switch command are known, or
- the target cell is an FR1 cell, and the UE has reported L3-RSRP measurement result with SSB index associated to the target TCI state within 5 seconds before receiving the LTM TCI state activation command, and SNR of the SSB associated to the target TCI state ≥ -3dB.

LTM cell switch delay is defined as:

$$D_{LTM} = T_{cmd} + T_{LTM\text{-}RRC\text{-}processing} + T_{LTM\text{-}processing} + T_{first\text{-}RS} + T_{RS\text{-}proc} + T_{LTM\text{-}IU} \text{ ms}$$

Where:

T_{cmd}, $T_{LTM\text{-}RRC\text{-}processing}$, $T_{LTM\text{-}processing}$, $T_{first\text{-}RS}$, $T_{RS\text{-}proc}$ and $T_{LTM\text{-}IU}$ are as stated in TS 38.133 [6] section 6.3.1.2.

The definition of known LTM target cell and the definition of known target joint DL/UL TCI state or separate DL and UL TCI states are as stated in TS 38.133 [6] in section 6.3.1.2.

6.3.5.1 NR SA FR1 RACH-based intra-frequency LTM PSCell switch

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Test applicability is missing
- Message contents are TBD
- Test procedure is missing

6.3.5.1.1 Test purpose

To verify the UE's ability to perform NR FR1 RACH-based intra frequency PSCell switch specified in 38.133 [6] clause 8.20 for both with and without early TCI state activation.

6.3.5.1.2 Test applicability

This test applies to all types of NR UEs supporting NR LTM for SCG with RACH from Release 18 onwards.

6.3.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.5.0.

The normative reference for this requirement is TS 38.133 [6] clauses 8.20 and A.6.3.5.1.

6.3.5.1.4 Test description

6.3.5.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.3.5.1.4.1-1.

Table 6.3.5.1.4.1-1: Intra-frequency cell switch from FR1 to FR1 test configurations

Config	Description
6.3.5.1-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.3.5.1-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.3.5.1-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.3.5.1.4.1-2.

Table 6.3.5.1.4.1-2: Initial conditions for NR SA FR1 handover with known target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.5.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.3.5.1.4.1-3.

2. Message contents are defined in clause 6.3.5.1.4.3.

3. Three cells are deployed in the test, which are FR1 PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The power levels and settings are according to Table 6.3.5.1.4.1-3 and Table 6.3.5.1.5-1.

Table 6.3.5.1.4.1-3: General test parameters for Intra-frequency PSCell cell switch from FR1 to FR1

Parameter		Unit	Value				Comment
			Test 1A	Test 1B	Test 2A	Test 2B	
Initial conditions	Active cells		Cell 1 (PCell), Cell 2 (PSCell)				
	Neighbouring cell		Cell 3				Cell 3 is the candidate cell
Final condition	Active cells		Cell 1 (PCell), Cell 3 (PSCell)				
A3-Offset		dB	-6				
Hysteresis		dB	0				
Time To Trigger		s	0				
Filter coefficient			0				L3 filtering is not used
DRX			OFF				DRX is not used
Access Barring Information		-	Not Sent				No additional delays in random access procedure.

Time offset between Cell 2 and Cell 3			2 µs				RTD between Cell 2 and Cell 3 is less than CP
deriveSSB-IndexFromCell			Enabled				
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	80				Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1				Report candidate cell's (Cell 3) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1				
	spCellInclusion		N/A				
ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		DLorJoint TCI.State.0	DLorJoint TCI.State.2	DLorJoint TCI.State.1	DLorJoint TCI.State.3	As specified in TS.38.133 [6] clause A.3.16B. In test 1A and 1B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for early TCI state activation. CandidateTCI-State#2 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command. In test 2A and 2B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command.
	CandidateTCI-State#2		DLorJoint TCI.State.1	DLorJoint TCI.State.3	N/A	N/A	
ltm-UL-TCI-StatesToAddModList	CandidateTCI-UL-State#1		N/A	UL TCI.State.0	N/A	UL TCI.State.0	
ltm-ConfigComplete			True				Candidate cell's configuration is complete configuration
T1		s	<3				
T2		s	≤0.2				
T3		s	≤0.1				
T4		s	≤0.1				

6.3.5.1.4.2 Test procedure

TBD

6.3.5.1.4.3 Message contents

TBD

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.3.5.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	TBD

6.3.5.1.5 Test requirements

Table 6.3.5.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.3.5.1.5-1: Cell specific test parameters for NR FR1 Intra frequency PSCell switch test case

Parameter	Unit	Cell 1	Cell 2	Cell 3

			T1 ~ T4	T1 ~ T4	T1 ~ T4
NR RF Channel Number			1	2	2
Duplex mode	Config 1, 1A		FDD		
	Config 2, 3, 2A, 3A		TDD		
TDD configuration	Config 1, 1A		Not Applicable		
	Config 2, 2A		TDDConf.1.1		
	Config 3, 3A		TDDConf.2.1		
$BW_{channel}$	Config 1, 1A	MHz	10: $N_{RB,c}$ = 52		
	Config 2, 2A	MHz	10: $N_{RB,c}$ = 52		
	Config 3, 3A	MHz	40: $N_{RB,c}$ = 106		
BWP BW	Config 1, 1A	MHz	10: $N_{RB,c}$ = 52		
	Config 2, 2A	MHz	10: $N_{RB,c}$ = 52		
	Config 3, 3A	MHz	40: $N_{RB,c}$ = 106		
PDSCH Reference	Config 1, 1A		SR.1.1 FDD		
	Config 2, 2A		SR.1.1 TDD		
	Config 3, 3A		SR.2.1 TDD		
CORESET Reference Channel	Config 1, 1A		CR.1.1 FDD		
	Config 2, 2A		CR.1.1 TDD		
	Config 3, 3A		CR.2.1 TDD		
CP length	Config 1, 2, 3, 1A, 2A, 3A		Normal		
TRS configuration	Config 1, 1A		TRS.1.1 FDD		
	Config 2, 2A		TRS.1.1 TDD		
	Config 3, 3A		TRS.1.2 TDD		
OCNG Patterns	Config 1, 2, 3, 1A, 2A, 3A		OP.1		
SMTC Configuration	Config 1, 2, 3, 1A, 2A, 3A		SMTC.1		
SSB Configuration	Config 1,2, 1A, 2A		SSB.1 FR1		
	Config 3, 3A		SSB.2 FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2, 1A, 2A	kHz	15		
	Config 3, 3A	kHz	30		
PUCCH/PUSCH subcarrier spacing	Config 1,2, 1A, 2A	kHz	15		
	Config 3, 3A	kHz	30		
PRACH configuration	Config 1, 2, 3, 1A, 2A, 3A		FR1 PRACH configuration 6		

BWP configuration	Initial DL BWP	Config 1, 2, 3, 1A, 2A, 3A		DLBWP.0.1		
	Dedicated DL BWP	Config 1, 2, 3, 1A, 2A, 3A		DLBWP.1.1		
	Initial UL BWP	Config 1, 2, 3, 1A, 2A, 3A		ULBWP.0.1		
	Dedicated UL BWP	Config 1, 2, 3, 1A, 2A, 3A		ULBWP.1.1		
EPRE ratio of PSS to SSS		Config 1, 2, 3, 1A, 2A, 3A	dB	0		
EPRE ratio of PBCH DMRS to SSS		Config 1, 2, 3, 1A, 2A, 3A				
EPRE ratio of PBCH to PBCH DMRS		Config 1, 2, 3, 1A, 2A, 3A				
EPRE ratio of PDCCH DMRS to SSS		Config 1, 2, 3, 1A, 2A, 3A				
EPRE ratio of PDCCH to PDCCH DMRS		Config 1, 2, 3, 1A, 2A, 3A				
EPRE ratio of PDSCH DMRS to SSS		Config 1, 2, 3, 1A, 2A, 3A				
EPRE ratio of PDSCH to PDSCH		Config 1, 2, 3, 1A, 2A, 3A				
EPRE ratio of OCNG DMRS to SSS(Note 1)		Config 1, 2, 3, 1A, 2A, 3A				
EPRE ratio of OCNG to OCNG DMRS (Note 1)		Config 1, 2, 3, 1A, 2A, 3A				
N_{oc} Note2		Config 1, 2, 3, 1A, 2A, 3A	dBm/15kHz	-98+TT		
N_{oc} Note2		Config 1,2, 1A, 2A	dBm/SCS	-98+TT		
		Config 3, 3A		-95+TT		
$\hat{E}_s/I_{ot}$		Config 1, 2, 3, 1A, 2A, 3A	dB	11+TT	-0.64+TT	-0.64+TT
$\hat{E}_s/N_{oc}$		Config 1, 2, 3, 1A, 2A, 3A	dB	11+TT	8+TT	8+TT
SSB_RP		Config 1,2, 1A, 2A	dBm/SCS	-87+TT	-90+TT	-90+TT
		Config 3, 3A	dBm/SCS	-84+TT	-87+TT	-87+TT
Io Note3		Config 1,2, 1A, 2A	dBm/ 9.36MHz	-58.7+TT	-58.7+TT	-58.7+TT
		Config 3, 3A	dBm/ 38.16MHz	-52.62+TT	-52.6+TT	-52.6+TT
Propagation condition		Config 1, 2, 3, 1A, 2A, 3A	-	AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 3 in no later than D_{LTM} from the beginning of time period T4.

The rate of correct cell switches observed during repeated tests shall be at least 90%.

NOTE: The cell switch delay can be expressed as D_{LTM} (= T_{cmd} + $T_{LTM\text{-}RRC\text{-}processing}$ + $T_{LTM\text{-}processing}$ + $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$ + $T_{LTM\text{-}IU}$), where:

T_{cmd} = T_{HARQ} + 3ms and is specified in clause 6.3.1.2

- $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$= 0 ms for Test 1A and 1B, $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$= 22 ms for Test 2A and 2B
- $T_{LTM\text{-}IU}$ = 20 ms
- $T_{LTM\text{-}RRC\text{-}processing}$ = 10 ms if UE does not support *ltm-FastProcessingConfig-r18*, otherwise $T_{LTM\text{-}RRC\text{-}processing}$ =0ms
- $T_{LTM\text{-}processing}$ = 10 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 10 ms for FR1-to-FR1 cell switch in the capability
- $T_{LTM\text{-}processing}$ = 15 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 15 ms for FR1-to-FR1 cell switch in the capability
- $T_{LTM\text{-}processing}$ = 20 ms if the UE does not support *ltm-FastUE-Processing-r18* capability.

6.4 Timing

6.4.1 UE transmit timing

6.4.1.0 Minimum conformance requirements

6.4.1.0.1 Minimum conformance requirements for UE transmit timing accuracy

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 6.4.1.0.1-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS or it is the PRACH transmission.

The UE shall meet the Te requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{\mathrm{TA}} + N_{\mathrm{TA\,offset}})\times T_{\mathrm{c}}$. The downlink timing is defined as the time when the first detected path (in time) of the corresponding downlink frame is received from the reference cell. N_{TA} for PRACH is defined as 0.

$(N_{\mathrm{TA}} + N_{\mathrm{TA\,offset}})\times T_{\mathrm{c}}$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in clause 7.3 was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{\mathrm{TA\,offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{\mathrm{TA\,offset}}$ is defined in Table 6.4.1.0.1-2.

Table 6.4.1.0.1-1: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (KHz)	SCS of uplink signals s(KHz)	T_e
1	15	15	12*64*T_c
		30	10*64*T_c
		60	10*64*T_c
	30	15	8*64*T_c
		30	8*64*T_c
		60	7*64*T_c
2	120	60	3.5*64*T_c
		120	3.5*64*T_c
	240	60	3*64*T_c
		120	3*64*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 6.4.1.0.1-2: The Value of $N_{\mathrm{TA\,offset}}$

Frequency range and band of cell used for uplink transmission	$N_{\mathrm{TA\,offset}}$ (Unit: T_C)
FR1 FDD band without LTE-NR coexistence case or FR1 TDD band without LTE-NR coexistence case	25600 (Note 1)
FR1 FDD band with LTE-NR coexistence case	0 (Note 1)
FR1 TDD band with LTE-NR coexistence case	39936 (Note 1)
FR2	13792
Note 1: The UE identifies $N_{\mathrm{TA\,offset}}$ based on the information n-TimingAdvanceOffset according to [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{\mathrm{TA\,offset}}$ is set as 25600 for FR1 band. In case of multiple UL carriers in the same TAG, UE expects that the same value of n-TimingAdvanceOffset is provided for all the UL carriers according to section 4.2 in [3] and the value 39936 of $N_{\mathrm{TA\,offset}}$ can also be provided for a FDD serving cell.	

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell except when the timing advance in clause 7.3 is applied.

When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$, the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{TA} + N_{TA\ offset}) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q.

2) The minimum aggregate adjustment rate shall be T_p per second.

3) The maximum aggregate adjustment rate shall be T_q per [200]ms.

where the maximum autonomous time adjustment step T_q and the aggregate adjustment rate T_p are specified in Table 6.4.1.0.1-3.

Table 6.4.1.0.1-3: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (KHz)	T_q	T_p
1	15	$5.5*64*T_c$	$5.5*64*T_c$
	30	$5.5*64*T_c$	$5.5*64*T_c$
	60	$5.5*64*T_c$	$5.5*64*T_c$
2	60	$2.5*64*T_c$	$2.5*64*T_c$
	120	$2.5*64*T_c$	$2.5*64*T_c$
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6]			

The normative reference for this requirement is TS.38.133 [6] clause 7.1.2.

6.4.1.1 NR SA FR1 UE transmit timing accuracy

6.4.1.1.1 Test purpose

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in TS 38.133 [6] clause 7.1.2.

6.4.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.4.1.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.6.4.1.1

6.4.1.1.4 Test Description

6.4.1.1.4.1 Initial Conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-1 [17].

This test can be run in one of the configurations defined in Table 6.4.1.1.4.1-1.

Table 6.4.1.1.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
6.4.1.1-1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz

6.4.1.1-2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
6.4.1.1-3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to be tested in one of the supported test configurations in FR1 depending on UE capability.	

Configure the test equipment and the DUT according to the parameters in Table 6.4.1.1.4.1-2

Table 6.4.1.1.4.1-2: Initial conditions for NR SA FR1 transmit timing accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.4.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE link		

1. Message contents are defined in clause 6 6.4.1.1.4.3.

2. A single NR cell is used. The connection setup is done according to the settings in Annex C.1.3, and the downlink signal levels as per Annex C.1. The general test parameters are given in Table 6.4.1.1.5-1 below.

6.4.1.1.4.2 Test procedure

The test consists of a single NR cell (PCell). The downlink timing of the NR Cell is changed and the changes in UE transmit timing are observed. The transmit timing is verified by the UE transmitting SRS used as a measurement reference facilitating the SS timing estimation.

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* according to TS 38.508-1 [6] clause 4.5.

2. Set up NR Cell according to parameters given in Table 6.4.1.1.4.1-1.

3. The SS shall transmit an RRCReconfiguration message configuring the UE with the message content defined in clause 6.4.1.1.4.3.

4. The UE shall transmit RRCReconfigurationComplete message.

5. After connection set up with the cell and during 2 seconds before DL timing adjustment, the test equipment shall monitor all SRS transmissions and verify that, for each received SRS, the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.

   a. The N_{TA} offset value (in T_c units) is 25600 for FR1

   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 6.4.1.1.5-4

6. The test system shall adjust the timing of the DL path by values given in Table 6.4.1.1.4.2-1. For Test 2, the DL timing change shall be applied within the first half of the DRX cycle upon expiration of the preceding DRX ON duration.

Table 6.4.1.1.4.2-1: Adjustment Value for DL Timing

SCS of SSB signals (KHz)	Adjustment Value	
	Test1	Test2

15	+64*64Tc	+32*64Tc
30	+32*64Tc	+16*64Tc

7. The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Table 6.4.1.1.5-5. This will only be done for Test1. The test system samples the UE Transmit Timing once per SRS transmission (as per configured SRS periodicity). To check Rule 1, the SS shall check that the maximum time adjustment step size T_q between one SRS transmission to next consecutive SRS transmission of a valid UL slot is within Rule 1 as specified in clause 6.4.1.0.1 and Table 6.4.1.0.1-3. To check that the minimum adjustment rate is within Rule 2 as specified in clause 6.4.1.0.1 and Table 6.4.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 1 + offset seconds sliding window (offset in ms to the next consecutive SRS transmission), with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. To check that the maximum adjustment rate is within Rule 3 as specified in clause 6.4.1.0.1 and Table 6.4.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 200ms – offset sliding window of previous SRS transmission, with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. The three rules apply until the UE transmit timing offset is within the limits specified in 6.4.1.0.1 and Table 6.4.1.0.1-3 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1. The test system will wait till evaluation interval of T seconds is met to ensure UE transmit timing is stable at the end of the step, where T=.DL_timing_change[Ts]/5.5Ts and DL_timing_change is specified in Table 6.4.1.1.4.2-1.

8. After the UE transmit timing is within the limits specified in step 7, and during 2 seconds, the test system shall monitor all SRS transmissions and verify that, for each received SRS, the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

6.4.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.4.1.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1

Table 6.4.1.1.4.3-1: *SRS-Config* : Additional test requirement for UE transmit timing accuracy for NR SA FR1 UE

Derivation Path: TS 38.508-1 [14], Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {			
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {			
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	14		SCS15
	25		SCS30
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			

periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
sl1	0		Test 1
sl320	3		Test 2 and SCS15
sl640	5		Test 2 and SCS30
}			
}			
}			
}			
}			
}			

Table 6.4.1.1.4.3-2: *DRX-Config* : Additional test requirement for UE transmit timing accuracy Test 2 for NR SA FR1

Derivation Path: TS 38.508-1 [14], Table 4.6.3-56			
Information Element	**Value/remark**	**Comment**	**Condition**
DRX-Config ::= CHOICE {			
drx-InactivityTimer	ms1		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms320	0		
}			
}			

6.4.1.1.5 Test Requirements

Table 6.4.1.1.5-1: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1,2,3	Freq1	Freq1
NR Channel Number		1,2,3	2	2
TDD configuration		1	Not Applicable	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52	
		2	10: $N_{RB,c}$ = 52	
		3	40: $N_{RB,c}$ = 106	
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
DRx Cycle	ms	1,2,3	N/A	DRX.8[Note5]
PDSCH Reference measurement channel		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET Reference Channel		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1,2,3	OP.1	
SSB configuration		1,2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC		1	SMTC.1	
		3	SMTC.2	

TRS configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
EPRE ratio of PSS to SSS	dB	1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz	1,2,3	-98	-98
N_{oc} Note2	dBm/SCS	1,2	-98	-98
		3	-95	-95
$\hat{E}_s/I_{ot}$		1,2,3	3.3	3.3
$\hat{E}_s/N_{oc}$		1,2,3	3.3	3.3
SS-RSRP Note3	dBm/SCS	1,2	-95	-95
		3	-92	-92
Io Note3	dBm/9.36MHz	1,2	-65.08	-65.08
	dBm/38.1MHz	3	-61.99	-61.99
Propagation condition		1,2,3	AWGN	
SRS Config		1	SRSConf.1 Note6	SRSConf.3 Note6
		2,3	SRSConf.1 Note6	SRSConf.2 Note6

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: DRx related parameters are given in Table 6.4.1.1.5-3 or Table A.5.-1
Note 6: SRS configs are given in Table 6.4.1.1.5-2

Table 6.4.1.1.5-2: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	SRSConf.3	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	0	
	srs-ResourceIdList	0	0	0	
	resourceType	Periodic	Periodic	Periodic	
	Usage	Codebook	Codebook	Codebook	
	SRS-ResourceSetId	0	0	0	
SRS-Resource	nrofSRS-Ports	Port1	Port1	Port1	
	transmissionComb	n2	n2	n2	
	combOffset-n2	0	0	0	
	cyclicShift-n2	0	0	0	
	resourceMapping startPosition	0	0	0	
	resourceMapping nrofSymbols	n1	n1	n1	
	resourceMapping repetitionFactor	n1	n1	n1	

	freqDomainPosition	0	0	0	
	freqDomainShift	0	0	0	
	freqHopping c-SRS	14 for test configuration 1,2 25 for test configuration 3	25	14	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	0	
	freqHopping b-hop	0	0	0	
	groupOrSequenceHopping	Neither	Neither	Neither	
	resourceType	Periodic	Periodic	Periodic	
	periodicityAndOffset-p	sl1	sl640,5	sl320,3	Offset to align with DRx periodicity
	sequenceId	0	0	0	Any 10 bit number

Table 6.4.1.1.5-3: DRX-Configuration for UL Timing Tests

Field	Test 2
	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
longDRX-CycleStartOffset	320 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [13]	

Table 6.4.1.1.5-4: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (KHz)	SCS of uplink signals (KHz)	T_e
1	15	15	$13.75*64*T_c$
		30	$11.75*64*T_c$
		60	$11.75*64*T_c$
	30	15	$9.75*64*T_c$
		30	$9.75*64*T_c$
		60	$8.75*64*T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 6.4.1.1.5-5: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (KHz)	T_q	T_p	Maximum Adjustement Rate
1	15	$6.0*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
	30	$6.0*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
	60	$6.0*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6]				

6.4.2 UE timer accuracy

6.4.3 Timing advance

6.4.3.0 Minimum conformance requirement

6.4.3.0.1 Minimum conformance requirement for timing advance adjustment

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 6.4.3.1.3-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS38.213 [8].

Table 6.4.3.1.3-1: UE Timing Advance adjustment accuracy

Sub Carrier Spacing, SCS kHz	15	30	60	120
UE Timing Advance adjustment accuracy	±256 T_c	±256 T_c	±128 T_c	±32 T_c

6.4.3.1 NR SA FR1 timing advance adjustment accuracy

6.4.3.1.1 Test purpose

The purpose of the test is to verify UE timing advance adjustment delay and accuracy requirement defined in clause 7.3 of TS 38.133 [6].

6.4.3.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.4.3.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.4.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.4.3.1.

6.4.3.1.4 Test description

6.4.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.4.3.1.4.1-1.

Table 6.4.3.1.4.1-1: NR SA FR1 timing advance adjustment accuracy supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.4.3.1.4.1-2

Table 6.4.3.1.4.1-2: Initial conditions for NR SA FR1 timing advance adjustment accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.4.3.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	Without LTE Link	

Table 6.4.3.1.4.1-3: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.8.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.8.1-2
Initial UL BWP		ULBWP.0.1	As specified in Table A.8.2-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.8.2-2
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For SCS = 15kHz : $N_{TA_new} = N_{TA_old}$ + $8192*T_c$ (based on equation in TS38.213 section 4.2) For SCS = 30kHz : $N_{TA_new} = N_{TA_old}$ + $4096*T_c$ (based on equation in TS38.213 section 4.2)
T1	s	5	
T2	s	5	

1. Message contents are defined in clause 6.4.3.1.4.3.

2. Single Cell is used, which is NR FR1 PCell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.

3. The test parameters are given in Table 6.4.3.1.4.1-3 above.

4. Downlink signals for NR cell are initially set up according to Annex C.1.2 and C.1.3.

5. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [10] clause 4.5.

6.4.3.1.4.2 Test Procedure

The test consists of single cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table 6.4.3.1.5-1 and table 6.4.3.1.4.1-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured. The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

1. Set the parameters according to values in Tables 6.4.3.1.4.1-3.

2. SS shall transmit an RRCReconfiguration message.

3. The UE shall transmit RRCReconfigurationComplete message.

4. During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

5. During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value 39 as specified in table 6.4.3.1.4.1-3. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

6. As specified in Clause 7.3.2.1 of TS 38.133 [6], the UE adjusts its uplink timing at slot n+k+1 for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

7. The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

8. The result from the SRS and adjustment of the timing advance in step 7) is used to measure that the UE adjusts the timing of its transmission with a relative accuracy better than or equal to value specified in Table 6.4.3.1.3-1 to the signalled timing advance value compared to the timing of preceding uplink transmission.

9. If the UE adjust the timing of its transmission within a relative accuracy greater than or equal to value specified in Table 6.4.3.1.3-1 to the signalled timing advance value compared to the timing of preceding uplink transmission then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

10. The SS shall transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

11. After the RRC connection release, the SS transmits in Cell a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State RRC_CONNECTED according to TS 38.508-1 [14] clause 4.5.4 or if the paging fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED according to TS 38.508-1 [14] clause 4.5.4.

12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.4.3.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3, with the following exceptions:

Table 6.4.3.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1

Table 6.4.3.1.4.3-1: srs-Config setup

Derivation Path: TS 38.508-1, Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {	1 entry		
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {	1 entry		
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	12	Config 1,2	
	24	Config 3	
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			
periodic SEQUENCE {	periodic		

periodicityAndOffset-p CHOICE {			
sl5	2	Once every 5 Slots	SCS15
sl5	4	Once every 5 Slots	SCS30
}			
}			
}			
}			
}			
}			

6.4.3.1.5 Test Requirement

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. *k* slots after the reception of the timing advance command, where:

k = 5 for Config 1, 2, and 3

The Timing Advance adjustment accuracy shall be within the limits specified in Table 6.4.3.1.5-3.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

Table 6.4.3.1.5-1 and Table 6.4.3.1.5-2 define the primary level settings.

Table 6.4.3.1.5-1: Cell specific test parameters for timing advance

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
TRS Configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Patterns			OCNG pattern 1	
SMTC configuration	Config 1,2		SMTC.1 FR1	
	Config 3		SMTC.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz	
	Config 3		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz	
	Config 3		30 kHz	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				

EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	-98
N_{oc} Note2	Config 1,2	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
Io Note3	Config 1,2	dBm/ 9.36MHz	-67.57
	Config 3	dBm/ 38.16MHz	-62.58
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.4.3.1.5-2: Sounding Reference Symbol Configuration for timing advance

Field		Value	Comment
c-SRS	Config 1,2	12	Frequency hopping is disabled
	Config 3	24	
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5@2 for SCS 15kHz sl5@4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331.			

Table 6.4.3.1.5-3: UE Timing Advance adjustment accuracy

Sub Carrier Spacing, SCS kHz	15	30	60
UE Timing Advance adjustment accuracy	±344 T_c	±344 T_c	±216 T_c

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.5 Signaling characteristics

6.5.1 Radio link monitoring

6.5.1.00 General

The UE shall monitor the downlink link quality based on the reference signal in the configured RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell and PCell as specified in [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell.

The threshold Q_{out} is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out}$) as defined in Table 6.5.1-1.

The threshold Q_{in} is defined as the level at which the downlink radio link quality can be significantly more reliably received than at Q_{out} and shall correspond to the in-sync block error rate ($BLER_{in}$) as defined in Table 6.5.1-1.

The out-of-sync block error rate ($BLER_{out}$) and in-sync block error rate ($BLER_{in}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *RLM-IS-OOS-thresholdConfig* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 6.5.1-1 as default. All requirements here are applicable for BLER Configuration #0 in Table 6.5.1-1.

Table 6.5.1-1: Out-of-sync and in-sync block error rates

Configuration	$BLER_{out}$	$BLER_{in}$
0	10%	2%

UE shall be able to monitor up to X_{RLM-RS} RLM-RS resources of the same or different types in each corresponding carrier frequency range, where X_{RLM-RS} is specified in Table 6.5.1-2, and meet the requirements as specified in this section.

Table 6.5.1-2: Maximum number of RLM-RS resources X_{RLM-RS}

Maximum number of RLM-RS resources, X_{RLM-RS}	Carrier frequency range of PCell/Pcell
2	FR1, ≤ 3 GHz
4	FR1, > 3 GHz
8	FR2

If different SCS is used for CSI-RS based RLM-RS and SSB, then CSI-RS based RLM-RS and SSB shall be TDMed. If same SCS is used for CSI-RS based RLM-RS and SSB, then CSI-RS based RLM-RS and SSB can be FDMed or TDMed.

Any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [4]) means uplink signal
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [4]) means no uplink signal.

Introduction of Requirement on Radio Link Monitoring for UE Configured with Relaxed Measurement Criteria.

For the UE supports *rlm-Relaxation-r17*and configured with explicit signalling *goodServingCellEvaluationRLM*, which is always configured to the UE when the network enables RLM relaxation for the UE as specified in TS 38.331 [2], the relaxed requirements defined in clause 6.5.1.0.4 for SSB based radio link monitoring and the relaxed requirements defined in clause 6.5.1.0.5 for CSI-RS based radio link monitoring are allowed to apply to the relaxed RLM measurements on SpCell after fulfilling the following conditions:

- for the serving cells in intra-band carrier aggregation configured with SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on SCell, when
  - the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on Scell in the intra-band carrier aggregation if the *lowMobilityEvaluationConnected* is not configured, or
  - the UE is also configured with *lowMobilityEvaluationConnected* and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [2] is fulfilled for a period of $T_{SearchDeltaP\text{-}Connected}$ and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on Scell in the intra-band carrier aggregation.
- for other serving cells, when
  - the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the SpCell if the *lowMobilityEvaluationConnected* is not configured, or
  - the UE is also configured with *lowMobilityEvaluationConnected* and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [2] is fulfilled for a period of $T_{SearchDeltaP\text{-}Connected}$ and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the SpCell.

otherwise, UE shall apply the requirements defined in TS 38.133 [6] clause 8.1.2.2 for SSB based radio link monitoring and the requirements defined in TS 38.133 [6] clause 8.1.3.2 for CSI-RS based radio link monitoring. Note that when multiple resources are configured on a serving cell for RLM or BFD evaluation, the good serving cell quality criterion is considered as fulfilled for the serving cell when any resource configured for the cell fulfils the good serving defined in clause 5.7.13.2 of TS 38.331 [2].

The UE is no longer allowed to relax RLM measurements and apply the relaxed radio link monitoring provided that at least one of the following conditions is met:

- The UE sends out of sync indications to the higher layers,
- The timer T310 is running.
- No DRX is used or DRX cycle is longer than 80ms

6.5.1.0 Minimum conformance requirements

6.5.1.0.1 Minimum conformance requirements for out-of-sync SSB-based RLM

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB}$ [ms] period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB}$ [ms] evaluation period. The requirements in this section apply for each SSB based RLM-RS resource configured for PSCell, provided that the SSB configured for RLM is transmitted within UE active DL BWP during the entire evaluation period defined in Table 6.5.1.0.1-1.

$T_{Evaluate_out_SSB}$ is defined in Table 6.5.1.0.1-1 for FR1.

Table 6.5.1.0.1-1: Evaluation period $T_{Evaluate_out}$ for FR1

Configuration	$T_{Evaluate_out_SSB}$ (ms)
no DRX	max(200,ceil(10*P)*T_{SSB})
DRX cycle≤320	max(200,ceil(15*P)*max(T_{DRX},T_{SSB}))
DRX cycle>320	ceil(10*P)*T_{DRX}
NOTE: T_{SSB} is the periodicity of SSB configured for RLM.	

For FR1,

- P=1/(1 – T_{SSB}/MGRP), when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

If the high layer in TS 38.331 [13] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; otherwise $T_{SMTCperiod}$ follows *smtc1*.

Longer evaluation period would be expected if the combination of RLM-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

When the downlink radio link quality on all the configured RLM-RS resources is worse than Q_{out}, Layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [13].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [8]. Two successive indications from Layer 1 shall be separated by at least $T_{Indication_interval}$.

If DRX is used, when the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When

- the UE transitions from a first configuration of RLM-RS resources to a second configuration of RLM-RS resources that is different from the first configuration,

or

- the UE transitions between DRX and no DRX or DRX cycle periodicity changes,

for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM-RS resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When DRX is not used $T_{Indication_interval}$ is max(10ms, $T_{RLM\text{-}RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in section 8.1.2 if the RLM-RS resource is SSB.

When DRX is used, TIndication_interval is max(10ms, 1.5*DRX_cycle_length, 1.5*TRLM-RS,M) if DRX cycle_length is less than or equal to 320ms, and TIndication_interval is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [13], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and Layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [13].

There are no scheduling restrictions due to radio link monitoring performed with a same subcarrier spacing as PDSCH/PDCCH on FR1.

For UE which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to radio link monitoring based on SSB as RLM-RS. For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [11] the following restrictions apply due to radio link monitoring based on SSB as RLM-RS.

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on SSB symbols to be measured for radio link monitoring.

The normative reference for this requirement is TS 38.133 [6] clauses 8.1.2, 8.1.4, 8.1.5, 8.1.6 and 8.1.7.

6.5.1.0.2 Minimum conformance requirements for in-sync SSB-based RLM

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_SSB}$ [ms] period becomes better than the threshold Q_{in_SSB} within $T_{Evaluate_in_SSB}$ [ms] evaluation period.

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in Table 6.5.1.0.2-1 for FR1.

For FR1,

- $P=1/(1 – T_{SSB}/MGRP)$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Note: The overlap between CSI-RS RLM and SMTC means that CSI-RS based RLM is within the SMTC window duration.Longer evaluation period would be expected if the combination of RLM-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

The values of M_{out} and M_{in} used in Table 6.5.1.2.3-1 are defined as:

- M_{out} = 20 and M_{in} = 10, if the CSI-RS resource configured for RLM is transmitted with Density =3.

Table 6.5.1.0.2-1: Evaluation period $T_{Evaluate_out}$ and $T_{Evaluate_in}$ for FR1

Configuration	$T_{Evaluate_out}$ (ms)	$T_{Evaluate_in}$ (ms)
no DRX	$\max(200, \text{ceil}(M_{out}\times P)\times T_{CSI\text{-}RS})$	$\max(100, \text{ceil}(M_{in}\times P) \times T_{CSI\text{-}RS})$
DRX ≤ 320ms	$\max(200, \text{ceil}(1.5\times M_{out}\times P)\times \max(T_{DRX}, T_{CSI\text{-}RS}))$	$\max(100, \text{ceil}(1.5\times M_{in}\times P)\times \max(T_{DRX}, T_{CSI\text{-}RS}))$
DRX > 320ms	$\text{ceil}(M_{out}\times P) \times T_{DRX}$	$\text{ceil}(M_{in}\times P) \times T_{DRX}$
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource configured for RLM. T_{DRX} is the DRX cycle length.		

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than Q_{in}, Layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A Layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from Layer 1 shall be separated by at least $T_{Indication_interval}$.

When DRX is not used $T_{Indication_interval}$ is max(10ms, $T_{RLM\text{-}RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in section 8.1.2 of TS 38.133 [6] if the RLM-RS resource is SSB, or $T_{CSI\text{-}RS}$ specified later in this if the RLM-RS resource is CSI-RS.

When DRX is used, TIndication_interval is max(10ms, 1.5*DRX_cycle_length, 1.5*TRLM-RS,M) if DRX cycle_length is less than or equal to 320ms, and TIndication_interval is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and Layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the

second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM-RS resources to a second configuration of RLM-RS resources that is different from the first configuration, for each RLM-RS resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM-RS resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [13].

There are no scheduling restrictions due to radio link monitoring performed with a same subcarrier spacing as PDSCH/PDCCH on FR1.

For UE which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to radio link monitoring based on SSB as RLM-RS. For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [11] the following restrictions apply due to radio link monitoring based on SSB as RLM-RS.

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on SSB symbols to be measured for radio link monitoring.

The normative reference for this requirement is TS 38.133 [6] clauses 8.1.2, 8.1.4, 8.1.5, 8.1.6, 8.1.7 and A.7.5.1.

6.5.1.0.3 Minimum conformance requirements for out-of-sync and in-sync CSI-RS based RLM

[TS 38.133 clause 8.1.3.2]

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI-RS}$ [ms] period becomes worse than the threshold Q_{out_CSI-RS} within $T_{Evaluate_out_CSI-RS}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_CSI-RS}$ [ms] period becomes better than the threshold Q_{in_CSI-RS} within $T_{Evaluate_in_CSI-RS}$ [ms] evaluation period.

- $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ are defined in Table 8.1.3.2-1 for FR1.

For FR1,

- $P=1/(1 - T_{CSI-RS}/MGRP)$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Note: The overlap between CSI-RS RLM and SMTC means that CSI-RS based RLM is within the SMTC window duration. Longer evaluation period would be expected if the combination of RLM-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

The values of M_{out} and M_{in} used in Table 8.1.3.2-1 are defined as:

- M_{out} = 20 and M_{in} = 10, if the CSI-RS resource configured for RLM is transmitted with Density =3.

Table 6.5.1.0.3-1: Evaluation period $T_{Evaluate_out}$ and $T_{Evaluate_in}$ for FR1

Configuration	$T_{Evaluate_out}$ (ms)	$T_{Evaluate_in}$ (ms)
no DRX	$\max(200, \text{ceil}(M_{out}\times P)\times T_{CSI-RS})$	$\max(100, \text{ceil}(M_{in}\times P) \times T_{CSI-RS})$
DRX ≤ 320ms	$\max(200, \text{ceil}(1.5\times M_{out}\times P)\times \max(T_{DRX}, T_{CSI-RS}))$	$\max(100, \text{ceil}(1.5\times M_{in}\times P)\times \max(T_{DRX}, T_{CSI-RS}))$

DRX > 320ms	ceil(M_{out}×P) × T_{DRX}	ceil(M_{in}×P) × T_{DRX}
NOTE: T_{CSI-RS} is the periodicity of CSI-RS resource configured for RLM. T_{DRX} is the DRX cycle length.		

[TS 38.133 clause 8.1.6]

When the downlink radio link quality on all the configured RLM-RS resources is worse than Q_{out}, Layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [2].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than Q_{in}, Layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A Layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from Layer 1 shall be separated by at least $T_{Indication_interval}$.

When DRX is not used $T_{Indication_interval}$ is max(10ms, $T_{RLM-RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in section 8.1.2 if the RLM-RS resource is SSB, or T_{CSI-RS} specified in section 8.1.3 if the RLM-RS resource is CSI-RS.

In case DRX is used, $T_{Indication_interval}$ is max(10ms, 1.5*DRX_cycle_length, 1.5*$T_{RLM-RS,M}$) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and Layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

[TS 38.133 clause 8.1.5]

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [2].

The normative reference for this requirement is TS 38.133 [6] clause 8.1.3.2, 8.1.6 and 8.1.5.

6.5.1.0.4 Minimum requirement of SSB based radio link monitoring for UE fulfilling relaxed measurement criteria

[TS 38.133 clause 8.1.2.4]

This clause contains minimum requirements for relaxed radio link monitoring based on SSB.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB_Relax}$ [ms] period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB_Relax}$ [ms] evaluation period.

$T_{Evaluate_out_SSB_Relax}$ is defined in Table 6.5.1.0.4-1 for FR1.

$T_{Evaluate_out_SSB_Relax}$ is defined in Table 6.5.1.0.4-2 for FR2 with scaling factor N=8.

The value of P is defined in TS 38.133 [6] clause 8.1.2.2.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 6.5.1.0.4-1: Evaluation period $T_{Evaluate_out_SSB_Relax}$ for FR1

Configuration	$T_{Evaluate_out_SSB_Relax}$ (ms)
Max(T_{DRX},T_{SSB}) ≤80ms	Max(200× K3 [NOTE3], Ceil(15 × K1[NOTE2] × P) × Max(T_{DRX},T_{SSB}))

80ms < Max(T_{DRX},T_{SSB}) ≤160ms	Ceil(15 × P) × Max(T_{DRX},T_{SSB})
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length and no longer than 80ms. NOTE 2: K1 = 4 for Max(T_{DRX},T_{SSB}) ≤40ms and K1 = 2 for 40ms<Max(T_{DRX},T_{SSB}) ≤80ms. NOTE 3: K3 = K1, if K1 ≤ 2; otherwise K3 = 1.	

Table 6.5.1.0.4-2: Evaluation period $T_{Evaluate_out_SSB_Relax}$ for FR2

Configuration	$T_{Evaluate_out_SSB_Relax}$ (ms)
Max(T_{DRX},T_{SSB}) ≤80ms	Max(200× K4 NOTE3, Ceil(15 × K2 NOTE2 × P × N) × Max(T_{DRX},T_{SSB}))
80ms < Max(T_{DRX},T_{SSB}) ≤160ms	Ceil(15 × P × N) × Max(T_{DRX},T_{SSB})
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length and no longer than 80ms. NOTE 2: K2 = 2. NOTE 3: K4 = K2, if K2 ≤ 2; otherwise K4 = 1.	

6.5.1.0.5 Minimum requirement of CSI-RS based radio link monitoring for UE fulfilling relaxed measurement criteria

[TS 38.133 clause 8.1.3.4]

This clause contains minimum requirements for relaxed radio link monitoring based on CSI-RS.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI-RS_Relax}$ [ms] period becomes worse than the threshold Q_{out_CSI-RS} within $T_{Evaluate_out_CSI-RS_Relax}$ [ms] evaluation period.

$T_{Evaluate_out_CSI-RS_Relax}$ is defined in Table 6.5.1.0.5-1 for FR1.

$T_{Evaluate_out_CSI-RS_Relax}$ is defined in Table 6.5.1.0.5-2 for FR2 with scaling factor N=1.

The value of P is defined in TS 38.133 [6] clause 8.1.3.2.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{out} used in Table 6.5.1.0.5-1 and Table 6.5.1.0.5-2 are defined as:

- M_{out} = 20, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth ≥ 24 PRBs.

Table 6.5.1.0.5-1: Evaluation period $T_{Evaluate_out_CSI-RS_Relax}$ for FR1

Configuration	$T_{Evaluate_out_CSI-RS_Relax}$ (ms)
Max(T_{DRX}, T_{CSI-RS}) ≤ 80 ms	Max(200 × K3 NOTE3, Ceil(1.5 × M_{out} × P × K1 NOTE2) × Max(T_{DRX}, T_{CSI-RS}) NOTE1)
NOTE1: T_{CSI-RS} is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length and no longer than 80ms. NOTE2: K1 = 2 for 40 ms < MAX(T_{DRX}, T_{CSI-RS}) ≤ 80 ms, K1 = 4 for MAX(T_{DRX}, T_{CSI-RS}) ≤ 40 ms NOTE3: K3 = K1, if K1 ≤ 2; K3 = 1 otherwise.	

Table 6.5.1.0.5-2: Evaluation period $T_{Evaluate_out_CSI-RS_Relax}$ for FR2

Configuration	$T_{Evaluate_out_CSI-RS_Relax}$ (ms)
$Max(T_{DRX}, T_{CSI-RS}) \leq 80$ ms	$Max(200 \times K4^{NOTE3}, Ceil(1.5 \times M_{out} \times P \times N \times K2^{NOTE2}) \times Max(T_{DRX}, T_{CSI-RS})^{NOTE1})$
NOTE1: T_{CSI-RS} is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length and no longer than 80ms. NOTE2: K2 = 2. NOTE3: K4 = K2, if K2 ≤ 2; K4 = 1 otherwise.	

6.5.1.1 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode

6.5.1.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the PCell configured with SSB-based RLM RS in non-DRX mode. This test will partly verify the NR cell radio link monitoring requirements in TS 38.133 [6] section 8.1.2.

6.5.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.5.1.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.1.

6.5.1.1.4 Test description

There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 6.5.1.1.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

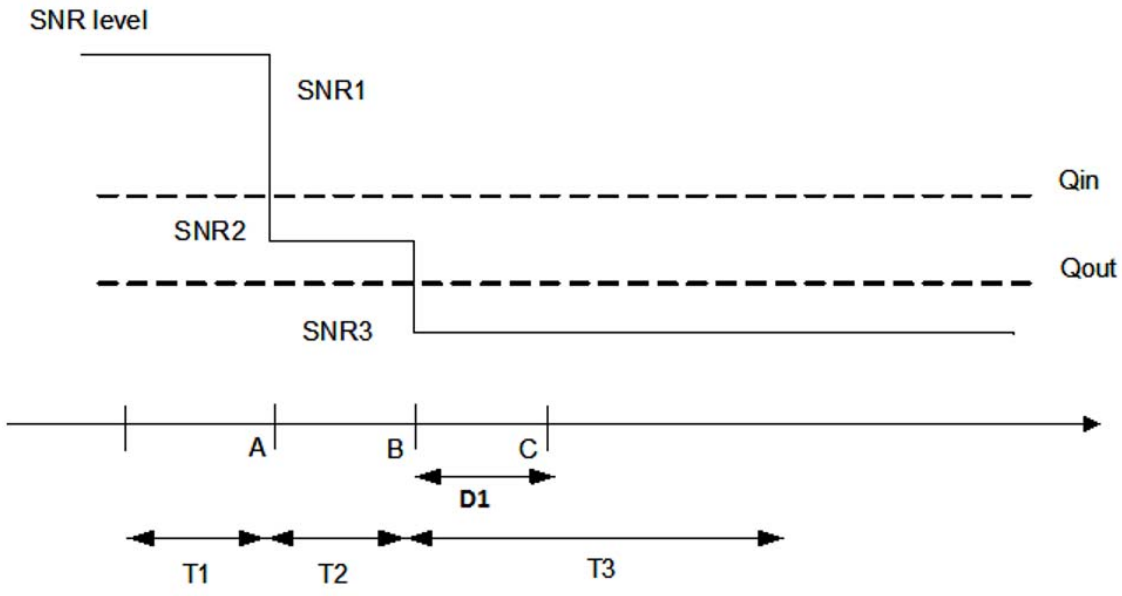

Figure 6.5.1.1.4-1: SNR variation for out-of-sync testing

6.5.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.1.1.4.1-1.

Table 6.5.1.1.4.1-1: NA SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode supported test configurations

Configuration	Description
6.5.1.1-1	FDD, SSB SCS 15 KHz, data SCS 15KHz, BW 10MHz
6.5.1.1-2	TDD, SSB SCS 15 KHz, data SCS 15KHz, BW 10MHz
6.5.1.1-3	TDD, SSB SCS 30 KHz, data SCS 30KHz, BW 40MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.1.4.1-2.

Table 6.5.1.1.4.1-2: Initial conditions for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

Table 6.5.1.1.4.1-3: Void

1. Message contents are defined in clause 6.5.1.1.4.3.
2. Single Cell is used, which is NR FR1 Pcell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 6.5.1.1.4.1-4 below.
4. Downlink signals for NR cell are initially set up according to Annex C.1.2 and C.1.3.

Table 6.5.1.1.4.1-4: General test parameters for FR1 out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1

UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz
	Config 3		30 KHz
PRACH Configuration	Config 1, 2		Table A.7.1-1, PRACH.1 FR1
	Config 3		Table A.7.1-1, PRACH.1 FR1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44

Note 1: All configurations are assigned to the UE prior to the start of time period T1.
Note 2: UE-specific PDCCH is not transmitted after T1 starts.

6.5.1.1.4.2 Test Procedure

There is one cell (Cell 1), which is the active NR cell, in the test. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.5.1.1.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.
2. The SS shall transmit an RRCReconfiguration message configuring the UE for inter-frequency measurements.
3. The UE shall transmit RRCReconfigurationComplete message.
4. Set the parameters according to T1 in Table 6.5.1.1.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.1.1.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.1.1.5-1. T3 starts.
7. If the SS:
   a) detects uplink power equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each subframe configured for CQI transmission (according to configured CQI periodicity on PUCCH [format 2]) during the period from time point A to time point B

   and

   b) does not detect any uplink power higher than OFF power defined in TS 38.521-1 [17] clause 6.3.2.5 from time point C (D1 after the start of T3) until T3 expires,
   the number of successful tests is increased by one.
8. Otherwise the number of failed tests is increased by one.
9. When T3 expires the SS shall change the SNR value to T1 as specified in Table 6.5.1.1.5-1.
10. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [10] clause 4.5.
11. Repeat steps 4-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.1.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and 7.3.1 with condition “Short_DCI” and with the following exceptions:

Table 6.5.1.1.4.3-0: Common Exception messages for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, GAP_NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier center of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-1 Table H.3.1-6 with conditions gapUE and RLM Table H.3.5-4 Table H.3.5-9

Table 6.5.1.1.4.3-1: Void

Table 6.5.1.1.4.3-2: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

Table 6.5.1.1.4.3-3: Void

Table 6.5.1.1.4.3-4 *SIB1*

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-53	-106 is actual value in dBm (-53 * 2 dBm)	dBm/15kHz
	-51	-102 is actual value in dBm (-51 * 2 dBm)	dBm/30kHz
}			
}			

6.5.1.1.5 Test Requirement

Table 6.5.1.1.5-1 defines the cell specific primary level settings.

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

Table 6.5.1.1.5-1: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		**Unit**	**Test 1**		
			T1	**T2**	**T3**
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1.8	-6.e	-15.8
	Config 2		1.8	-6.2	-15.8
	Config 3		1.8	-6.2	-15.8
N_{oc}	Config 1	dBm/15kHz	-98		
	Config 2		-98		
	Config 3		-98		

N_{oc}	Config 1	dBm/ SCS	-98
	Config 2		-98
	Config 3		-95
Propagation condition			TDL-C 300ns 100Hz
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.			
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.			
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure 6.5.1.1.4-1.			
Note 5: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR during T3 from D.4.1.1, is -18dB-TT = -18.9dB (including test tolerances).			

Table 6.5.1.1.5-2: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note Ensure that RLM RS is partially overlapped with measurement gap	

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.5.1.2 NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode

6.5.1.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects in sync for the purpose of monitoring downlink radio link quality of the PCell, when DRX is not used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.2.

6.5.1.2.2 Test applicability

This test applies to all types of NR UEs supporting Release 15 and forwared

6.5.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.2.

6.5.1.2.4 Test Description

There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.1.2.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Figure 6.5.1.2.4-1 - SNR variation for in-sync testing

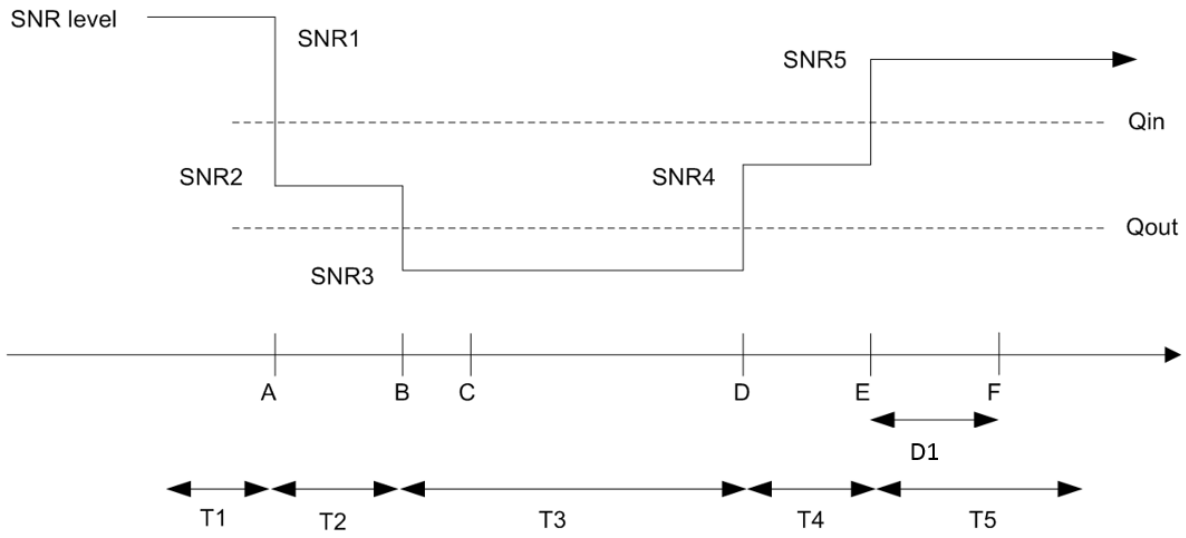

6.5.1.2.4 Test Requirements

6.5.1.2.4.1 Initial Conditions

This test shall be tested using any of the test configurations in Table 6.5.1.2.4.1-1.

Table 6.5.1.2.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
6.5.1.2-1	FDD, SSB SCS 15 KHz, data SCS 15KHz, BW 10MHz
6.5.1.2-2	TDD, SSB SCS 15 KHz, data SCS 15KHz, BW 10MHz
6.5.1.2-3	TDD, SSB SCS 30 KHz, data SCS 30KHz, BW 40MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.2.4.1-2.

Table 6.5.1.2.4.1-2: Initial conditions for SA FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

Table 6.5.1.2.4.1-3: Void

1. Message contents are defined in clause 6.5.1.2.4.3.

2. The power levels and settings for Cell 1 are set according to Annex A.6, Table A.6.1.1-1. The connection setup is done according to the settings in Annex C.1.3, and the downlink signal levels as per Annex C.1.2

3. The general test parameters are given in Table 6.5.1.2.4.1-4 below.

4. Downlink signals for NR cell are initially set up according to Annex C.1.

Table 6.5.1.2.4.1-4: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		FDD
		Config 2, 3		TDD
$BW_{channel}$		Config 1	MHz	10: $N_{RB,c}$ = 52
		Config 2		10: $N_{RB,c}$ = 52
		Config 3		40: $N_{RB,c}$ = 106
DL initial BWP configuration		Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration		Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2, 3		ULBWP.1.1
TDD Configuration		Config 1		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
SSB Configuration		Config 1		SSB.1 FR1
		Config 2		SSB.1 FR1
		Config 3		SSB.2 FR1
SMTC Configuration		Config 1, 2		SMTC.1
		Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2		15 KHz
		Config 3		30 KHz
PRACH Configuration		Config 1, 2		Table A.7.1-1, PRACH.1 FR1
		Config 3		Table A.7.1-1, PRACH.1 FR1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6

Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

6.5.1.2.4.2 Test Procedure

There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.1.2.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states.. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.5.1.2.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Set the parameters according to T1 in Table 6.5.1.2.5-1 for subtest 1 and 2. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.1.2.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.1.2.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 6.5.1.2.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 6.5.1.2.5-1. T5 starts.

7. If the SS detects uplink power equal to or higher than the minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in the subframe according the configured CQI reporting mode (PUCCH 2-0) during the period from time point A to time point F (D1 after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

9. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.1.2.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and 7.3.1 with condition "Short_DCI" and with the following exceptions:

Table 6.5.1.2.4.3-0: Common Exception messages for NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.5-4 Table H.3.5-9

Table 6.5.1.2.4.3-1: Void

Table 6.5.1.2.4.3-2: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms1000		
n310	n1		
t311	ms1000		
n311	n1		
}			

Table 6.5.1.2.4.3-3: Void

6.5.1.2.5 Test Requirement

The requirements in this section apply for each SSB based RLM-RS resource configured for the PCell, provided that the SSB configured for RLM are actually transmitted within UE active DL BWP during the entire evaluation period specified in section 6.5.1.2.3.

Table 6.5.1.2.5-1 defines the cell specific primary level settings.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence interval of 95%.

Table 6.5.1.2.5-1: Cell specific test parameters for FR1 for in-sync radio link monitoring tests in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB	0				
EPRE ratio of PBCH DMRS to SSS	dB	0				

EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8	-5.3	1.8
	Config 2		1.8	-6.2	-15.8	-5.3	1.8
	Config 3		1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1	dBm/ 15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1	dBm/ SCS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 6.5.1.2.4-1.
Note 5: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE wiht 4RX antennas connected under test, the SNR during T3 and T4 from D.4.1.1 are -18.0-TT and -8.0-TT, which are -18.8dB and -8.8dB(including test tolerances)

6.5.1.3 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode

6.5.1.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the PCell configured with SSB-based RLM RS when DRX is used. This test will partly verify the NR cell radio link monitoring requirements in TS 38.133 [6] section 8.1.2.

6.5.1.3.2 Test applicability

This test applies to all types of NR UE Release 15 and forward supporting 5GS NR SA FR1 and long DRX cycle.

6.5.1.3.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.3.

6.5.1.3.4 Test description

There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 6.5.1.3.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

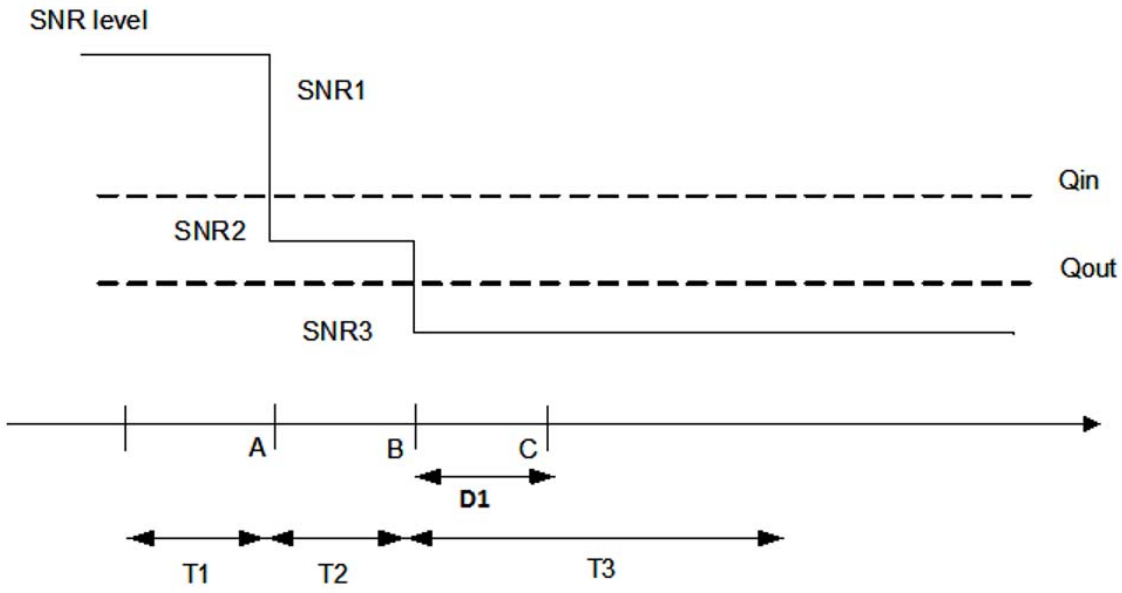

Figure 6.5.1.3.4-1: SNR variation for out-of-sync testing

6.5.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.1.3.4.1-1.

Table 6.5.1.3.4.1-1: NA SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode supported test configurations

Configuration	Description
6.5.1.3-1	FDD, SSB SCS 15 KHz, data SCS 15KHz, BW 10MHz
6.5.1.3-2	TDD, SSB SCS 15 KHz, data SCS 15KHz, BW 10MHz
6.5.1.3-3	TDD, SSB SCS 30 KHz, data SCS 30KHz, BW 40MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.3.4.1-2.

Table 6.5.1.3.4.1-2: Initial conditions for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

Table 6.5.1.3.4.1-3: Void

1. Message contents are defined in clause 6.5.1.3.4.3.

2. Single Cell is used, which is NR FR1 PCell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.

3. The test parameters are given in Table 6.5.1.3.4.1-4 below.

4. Downlink signals for NR cell are initially set up according to Annex C.1.2 and C.1.3.

Table 6.5.1.3.4.1-4: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz
	Config 3		30 KHz
PRACH Configuration	Config 1, 2		Table A.7.1-1, PRACH.1 FR1
	Config 3		Table A.7.1-1, PRACH.1 FR1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4

	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

6.5.1.3.4.2 Test Procedure

There is one cell (Cell 1), which is the active NR cell, in the test. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.5.1.3.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Set the parameters according to T1 in Table 6.5.1.3.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.1.3.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.1.3.5-1. T3 starts.

5. If the SS:
   a) detects uplink power equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each subframe configured for CQI transmission (according to configured CQI periodicity on PUCCH [format 2]) during the period from time point A to time point B

and

   b) does not detect any uplink power higher than OFF power defined in TS 38.521-1 [17] clause 6.3.2.5 from time point C (D1 after the start of T3) until T3 expires,
   the number of successful tests is increased by one.

Otherwise the number of failed tests is increased by one.

6. When T3 expires the SS shall change the SNR value to T1 as specified in Table 6.5.1.3.5-1.

7. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [10] clause 4.5.

8. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.1.3.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and 7.3.1 with condition "Short_DCI" and with the following exceptions:

Table 6.5.1.3.4.3-0: Common Exception messages for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.5-4 Table H.3.5-9 Table H.3.7-1 with condition DRX.3

Table 6.5.1.3.4.3-1: Void

Table 6.5.1.3.4.3-2: RLF-TimersAndConstant

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
n311	n1		
t311	ms1000		
}			

Table 6.5.1.3.4.3-3: Void

Table 6.5.1.3.4.3-4 *SIB1*

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfoSEQUENCE {			
q-RxLevMin	-53	-106 is actual value in dBm (-53 * 2 dBm)	dBm/15kHz
	-51	-102 is actual value in dBm (-51 * 2 dBm)	dBm/30kHz
}			
}			

6.5.1.3.5 Test Requirement

Table 6.5.1.3.5-1 defines the cell specific primary level settings.

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

Table 6.5.1.3.5-1: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8
	Config 2		1.8	-6.2	-15.8
	Config 3		1.8	-6.2	-15.8
N_{oc}	Config 1	dBm/15 kHz	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1	dBm/SCS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure 6.5.1.3.4-1.
Note 5: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR during T3 from D.4.1.1, is -18dB-TT = -18.9dB (including test tolerances)..

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.5.1.4 NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in DRX mode

6.5.1.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects in sync for the purpose of monitoring downlink radio link quality of the Pcell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.2.

6.5.1.4.2 Test applicability

This test applies to all types of NR UE Release 15 and forward supporting 5GS NR SA FR1 and long DRX cycle.

6.5.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.4.

6.5.1.4.4 Test Description

There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.1.4.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be

set to “infinity” so that UL timing alignment is maintained during the test.Editor note: whether to revise power level to be gradually changed

Figure 6.5.1.4.4-1 - SNR variation for in-sync testing

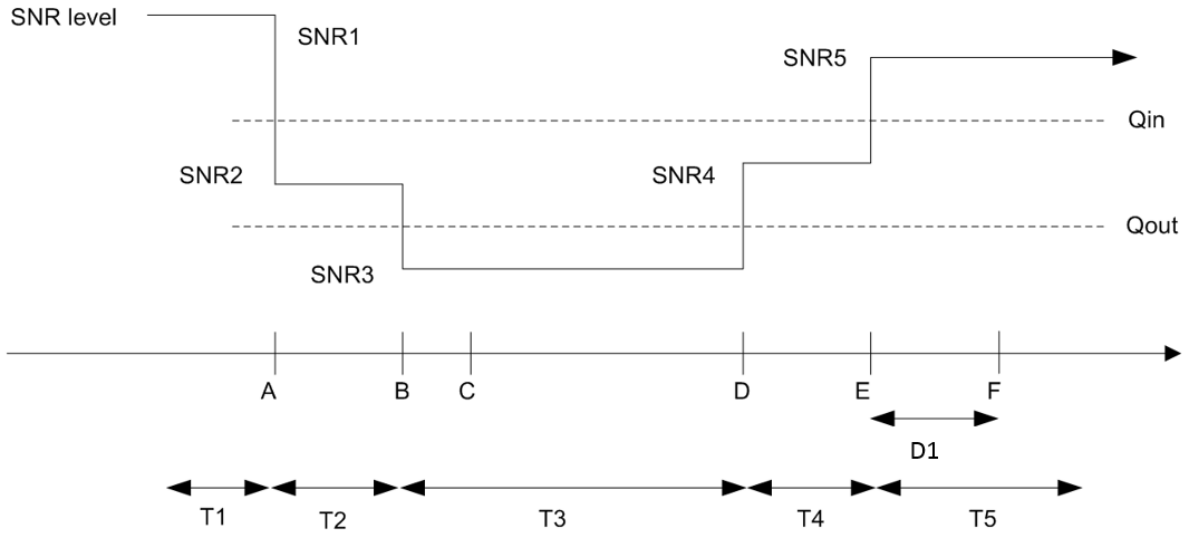

6.5.1.4.4.1 Initial Conditions

This test shall be tested using any of the test configurations in Table 6.5.1.4.4.1-1.

Table 6.5.1.4.4.1-1: Supported test configurations for NR FR1 PCell

Configuration	Description
6.5.1.4-1	FDD, SSB SCS 15 KHz, data SCS 15KHz, BW 10MHz
6.5.1.4-2	TDD, SSB SCS 15 KHz, data SCS 15KHz, BW 10MHz
6.5.1.4-3	TDD, SSB SCS 30 KHz, data SCS 30KHz, BW 40MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1.	

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.4.4.1-2.

Table 6.5.1.4.4.1-2: Initial conditions for SA FR1 radio link monitoring in-sync test for NR PCell configured with SSB-based RLM RS in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

Table 6.5.1.4.4.1-3: Void

1. Message contents are defined in clause 6.5.1.4.4.3.

2. There is one cell (Cell 1), which is the active NR cell, in the test. The power levels and settings are set according to Annex A.6, Table A.6.1.1-1. The connection setup is done according to the settings in Annex C.1.3, and the downlink signal levels as per Annex C.1.2.

3. The general test parameters are given in Table 6.5.1.4.4.1-4 below.

4. Downlink signals for NR cell are initially set up according to Annex C.1.

Table 6.5.1.4.4.1-4: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz
	Config 3		30 KHz
PRACH Configuration	Config 1, 2		Table A.7.1-1, PRACH.1 FR1
	Config 3		Table A.7.1-1, PRACH.1 FR1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size

	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.64
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

6.5.1.4.4.2 Test Procedure

There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.1.4.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.5.1.4.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Set the parameters according to T1 in Table 6.5.1.4.5-1 for subtest 1 and 2. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.1.4.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.1.4.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 6.5.1.4.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 6.5.1.4.5-1. T5 starts.

7. If the SS detects uplink power equal to or higher than the minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in the On-duration part of every DRX cycle in the subframe according the configured CQI reporting mode (PUCCH 2-0) during the period from time point A to time point F (D1 second after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

9. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.1.4.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and 7.3.1 with condition "Short_DCI" and with the following exceptions:

Table 6.5.1.4.4.3-0: Common Exception messages for NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in DRX mode test requirement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.5-4 Table H.3.5-9 Table H.3.7-1 with condition DRX.3

Table 6.5.1.4.4.3-1: Void

Table 6.5.1.4.4.3-2: RLF-TimersAndConstant

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms2000		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

Table 6.5.1.4.4.3-3: Void

6.5.1.4.5 Test Requirement

The requirements in this section apply for each SSB based RLM-RS resource configured for the PCell, provided that the SSB configured for RLM are actually transmitted within UE active DL BWP during the entire evaluation period specified in section 6.5.1.4.3.

Table 6.5.1.4.5-1 defines the cell specific primary level settings.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence interval of 95%.

Table 6.5.1.4.5-1: Cell specific test parameters for FR1 for in-sync radio link monitoring tests in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB	0				
EPRE ratio of PBCH DMRS to SSS	dB	0				
EPRE ratio of PBCH to PBCH DMRS	dB					

EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8	-5.3	1.8
	Config 2		1.8	-6.2	-15.8	-5.3	1.8
	Config 3		1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1	dBm/SCS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 6.5.1.4.4-1.
Note 5: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR during T3 and T4 from D.4.1.1 are -18.0-TT and -8.0-TT, which are -18.8dB and -8.8dB(including test tolerances).

6.5.1.5 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode

6.5.1.5.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1.

6.5.1.5.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting CSI-RS based RLM.

6.5.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.5.

6.5.1.5.4 Test description

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 6.5.1.5.4-1 shows the three different time durations and the corresponding variation of the downlink SNR in the active cell to emulate out-of-sync states.

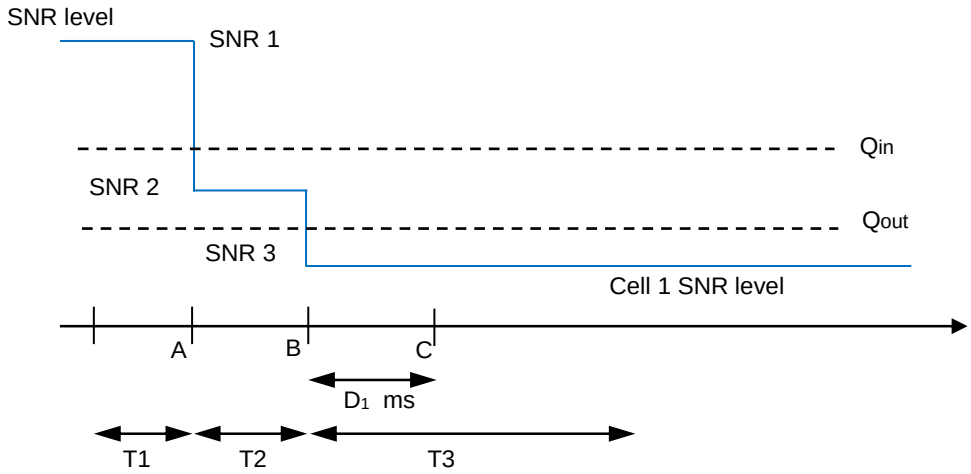

Figure 6.5.1.5.4-1: SNR variation for out-of-sync testing

6.5.1.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.1.5.4.1-1.

Table 6.5.1.5.4.1-1: Supported test configurations for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX

Configuration	Description
6.5.1.5-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.1.5-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.1.5-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.5.4.1-2.

Table 6.5.1.5.4.1-2: Initial conditions for NR SA radio link monitoring NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.5.1.5.4.1-3. The measurement gap configuration is according to Table 6.5.1.5.4.1-4.

2. Message contents are defined in clause 6.5.1.5.4.3.

3. There are one cell in the test, where Cell 1 is the NR PCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table 6.5.1.5.5-1 for this test. Cell 1 is configured according to Annex C.1.2 and C.1.3.

Table 6.5.1.5.4.1-3: General test parameters for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD

T1	s	0.2
T2	s	0.48
T3	s	0.48
D1	s	0.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.		

Table 6.5.1.5.4.1-4: Measurement gap configuration for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX

Field	Test 1
	Value
gapOffset	0

6.5.1.5.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. The SS shall transmit an RRCReconfiguration message configuring the UE for inter-frequency measurements.
3. The UE shall transmit RRCReconfigurationComplete message.
4. Set the parameters of Cell 1 according to T1 in Table 6.5.1.5.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.1.5.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.1.5.5-1. T3 starts.
7. If the SS:

   a) detects uplink power equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect any uplink power higher than OFF power defined in TS 38.521-1 [17] clause 6.3.2.5 from time point C (D1 after the start of T3) until T3 expires,

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.
8. When T3 expires the SS shall change the SNR value to T1 as specified in Table 6.5.1.5.5-1.
9. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
10. Repeat steps 4-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with condition “Short_DCI” and with the following exceptions:

Table 6.5.1.5.4.3-1: Common Exception messages for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, GAP_NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier center of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-6 with conditions gapUE and RLM Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM

Table 6.5.1.5.4.3-2 *SIB1*

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfoSEQUENCE {			
q-RxLevMin	-46	-92 is actual value in dBm (-46 * 2 dBm)	dBm/15kHz or dBm/30kHz
}			
}			

Table 6.5.1.5.4.3-2: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

6.5.1.5.5 Test requirement

Tables 6.5.1.5.4.1-3 and 6.5.1.5.5-1 define the primary level settings including test tolerances for Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode.

Table 6.5.1.5.5-1: Cell specific test parameters for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			
EPRE ratio of OCNG DMRS to SSS	dB			
EPRE ratio of OCNG to OCNG DMRS	dB			

SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8
	Config 2		1.8	-6.2	-15.8
	Config 3		1.8	-6.2	-15.8
N_{oc}	Config 1	dBm/15KHz	-98		
	Config 2		-98		
	Config 3		-98		
Propagation condition			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.1.5.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 from D.4.1.1 is -18 -TT, which is -18.8dB (including test tolerances).

The UE behaviour during time durations T1, T2 and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.1.6 NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode

6.5.1.6.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS in-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1.

6.5.1.6.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting CSI-RS based RLM.

6.5.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.6.

6.5.1.6.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.1.6.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the Pcell to emulate out-of-sync and in-sync states.

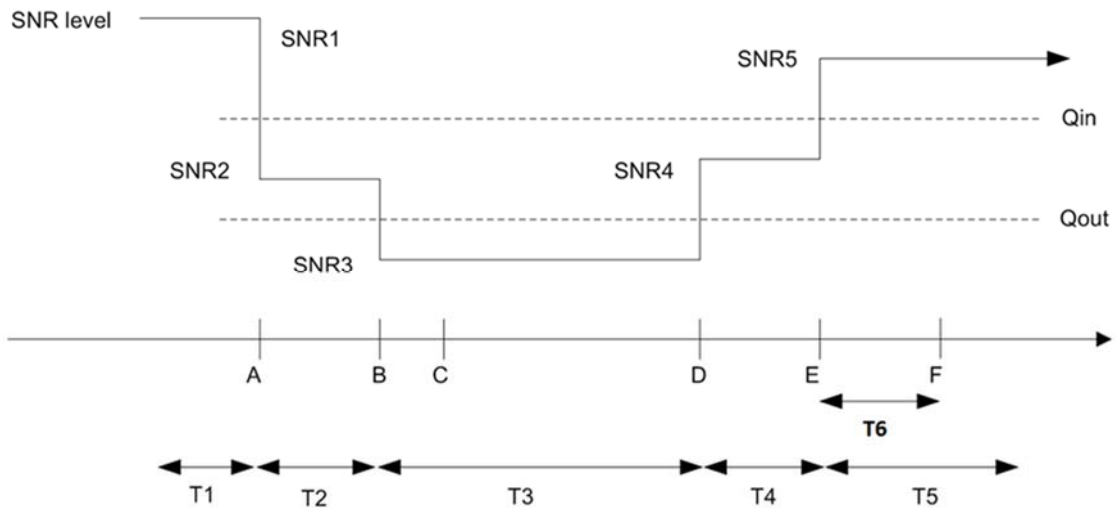

Figure 6.5.1.6.4-1: SNR variation for In-sync testing

6.5.1.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.1.6.4.1-1.

Table 6.5.1.6.4.1-1: Supported test configurations for NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode

Configuration	Description
6.5.1.6-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.1.6-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.1.6-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.6.4.1-2.

Table 6.5.1.6.4.1-2: Initial conditions for for NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.5.1.6.4.1-3.

2. Message contents are defined in clause 6.5.1.6.4.3.

3. There is one cell in the test, where Cell 1 is the NR PCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table 6.5.1.6.5-1 for this test. Cell 1 is configured according to Annex C.1.2 and C.1.3.

Table 6.5.1.6.4.1-3: General test parameters for NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.44
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

6.5.1.6.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of Cell 1 according to T1 in Table 6.5.1.6.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.1.6.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.1.6.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 6.5.1.6.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 6.5.1.6.5-1. T5 starts.

7. If the SS detects uplink power equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point F (T6 after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

9. After T5 expires, repeat steps 2-7 for both subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with the following exceptions:

Table 6.5.1.6.4.3-1: Common Exception messages for NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM

6.5.1.6.5 Test requirement

Tables 6.5.1.6.4.1-3 and 6.5.1.6.5-1 define the primary level settings including test tolerances for Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode.

Table 6.5.1.6.5-1: Cell specific test parameters for NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8	-5.3	1.8
	Config 2		1.8	-6.2	-15.8	-5.3	1.8
	Config 3		1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 6.5.1.6.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 from D.4.1.1 are -18.0-TT and -8.0-TT, which are -18.8dB and -8.8dB(including test tolerances).

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.1.7 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

6.5.1.7.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1.

6.5.1.7.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR1, CSI-RS based RLM and long DRX cycle.

6.5.1.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.7.

6.5.1.7.4 Test description

The test consists three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 6.5.1.7.4-1 shows the three different time durations and the corresponding variation of the downlink SNR in the active cell to emulate out-of-sync states.

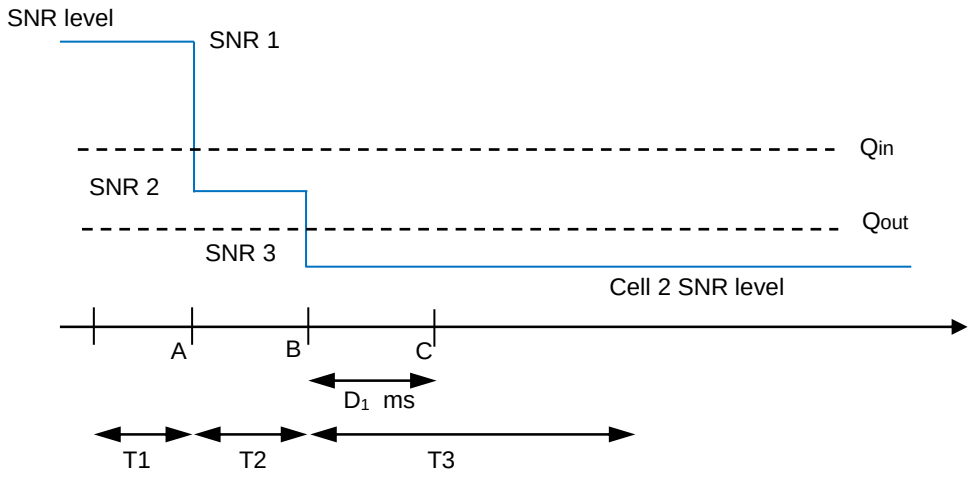

Figure 6.5.1.7.4-1: SNR variation for out-of-sync testing

6.5.1.7.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 6.5.1.7.4.1-1.

Table 6.5.1.7.4.1-1: Supported test configurations for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Configuration	Description
6.5.1.7-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.1.7-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.1.7-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.7.4.1-2.

Table 6.5.1.7.4.1-2: Initial conditions for NR SA radio link monitoring for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.5.1.7.4.1-3.

2. Message contents are defined in clause 6.5.1.7.4.3.

3. There is one cell in the test, where Cell 1 is the NR PCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table 6.5.1.7.5-1 for this test. Cell 1 is configured according to Annex C.1.2 and C.1.3.

Table 6.5.1.7.4.1-3: General test parameters for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD

	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

6.5.1.7.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.

2. Set the parameters of Cell 1 according to T1 in Table 6.5.1.7.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.1.7.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.1.7.5-1. T3 starts.

5. If the SS:

   a) detects uplink power equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in the On-duration part of every DRX cycle in the slots configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect any uplink power higher than OFF power defined in TS 38.521-1 [17] clause 6.3.2.5 from time point C (D1 after the start of T3) until T3 expires,

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

6. When T3 expires the SS shall change the SNR value to T1 as specified in Table 6.5.1.7.5-1.

7. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with the following exceptions:

Table 6.5.1.7.4.3-1: Common Exception messages for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-9 Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM Table H.3.7-1 with condition DRX.3

Table 6.5.1.7.4.3-2 *SIB1*

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfoSEQUENCE {			
q-RxLevMin	-46	-92 is actual value in dBm (-46 * 2 dBm)	dBm/15kHz or dBm/30kHz
}			
}			

Table 6.5.1.7.4.3-3: RLF-TimersAndConstant

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
}			

6.5.1.7.5 Test requirement

Tables 6.5.1.7.4.1-3 and 6.5.1.7.5-1 define the primary level settings including test tolerances for Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode.

Table 6.5.1.7.5-1: Cell specific test parameters for FR1 for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			

EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8
	Config 2		1.8	-6.2	-15.8
	Config 3		1.8	-6.2	-15.8
N_{oc}	Config 1	dBm/15kHz	-98		
	Config 2		-98		
	Config 3		-98		
Propagation condition			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.6.5.1.7.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 from D.4.1.1 is -18 -TT, which is -18.8dB (including test tolerances).

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on PCell.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.1.8 NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

6.5.1.8.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS in-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1.

6.5.1.8.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR1, CSI-RS based RLM and long DRX cycle.

6.5.1.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.8.

6.5.1.8.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.1.8.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate in-sync states.

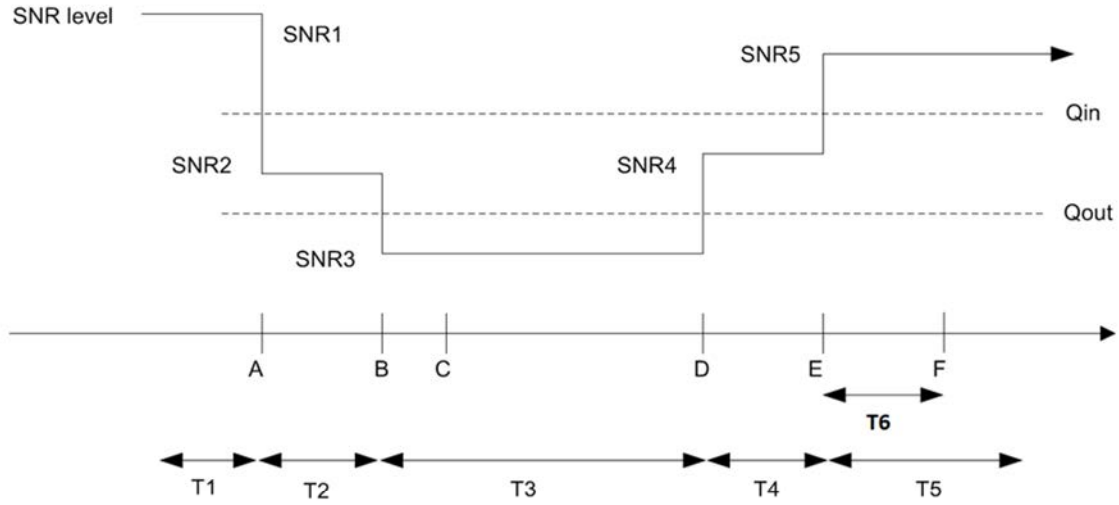

Figure 6.5.1.8.4-1: SNR variation for In-sync testing

6.5.1.8.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 6.5.1.8.4.1-1.

Table 6.5.1.8.4.1-1: Supported test configurations for NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Configuration	Description
6.5.1.8-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.1.8-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.1.8-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.8.4.1-2.

Table 6.5.1.8.4.1-2: Initial conditions for NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.5.1.8.4.1-3. The measurement gap configuration for subtest 2 is according to Table 6.5.1.8.4.1-4.

2. Message contents are defined in clause 6.5.1.8.4.3.

3. There are one cell in the test, where Cell 1 is the NR PCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1 for this test. Cell 1 is configured according to Annex C.1.2 and C.1.3.

Table 6.5.1.8.4.1-3: General test parameters for NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size

	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.24
T4			0.2
T5			1.88
T6		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table 6.5.1.8.4.1-4: Measurement gap configuration for NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

6.5.1.8.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms).

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. The SS shall transmit an RRCReconfiguration message configuring the UE for inter-frequency measurements.
3. The UE shall transmit RRCReconfigurationComplete message.
4. Set the parameters of Cell 1 according to T1 in Table 6.5.1.8.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.1.8.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.1.8.5-1. T3 starts.
7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 6.5.1.8.5-1. T4 starts.
8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 6.5.1.8.5-1. T5 starts.

9. If the SS detects uplink power equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in the On-duration part of every DRX cycle in the configured slots for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point F (T6 after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

10. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 4-10 for both subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.1.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with the following exceptions:

Table 6.5.1.8.4.3-1: Common Exception messages for NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, GAP_NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier center of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM Table H.3.7-1 with condition DRX.3 and Gap

Table 6.5.1.8.4.3-2: RLF-TimersAndConstant

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms2000		
}			

6.5.1.8.5 Test requirement

Tables 6.5.1.8.4.1-3 and 6.5.1.8.5-1 define the primary level settings including test tolerances for Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode.

Table 6.5.1.8.5-1: Cell specific test parameters for NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					

EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8	-5.3	1.8
	Config 2		1.8	-6.2	-15.8	-5.3	1.8
	Config 3		1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1..
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 6.5.1.8.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 from D.4.1.1 are -18.0-TT and -8.0-TT, which are -18.8dB and -8.8dB(including test tolerances)

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.1.9 SA FR1 radio link monitoring out-of-sync Test for PCell configured with CSI-RS-based RLM for UE fulfilling relaxed measurement criterion

6.5.1.9.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1.3.4 for UE fulfilling good serving cell quality criterion.

6.5.1.9.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 5GS NR SA FR1, CSI-RS based RLM and long DRX cycle and supporting RLM relaxation criteria *rlm-Relaxation-r17*.

6.5.1.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.1.0.5.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.9.

6.5.1.9.4 Test description

There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 6.5.1.9.4-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is

enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.s.

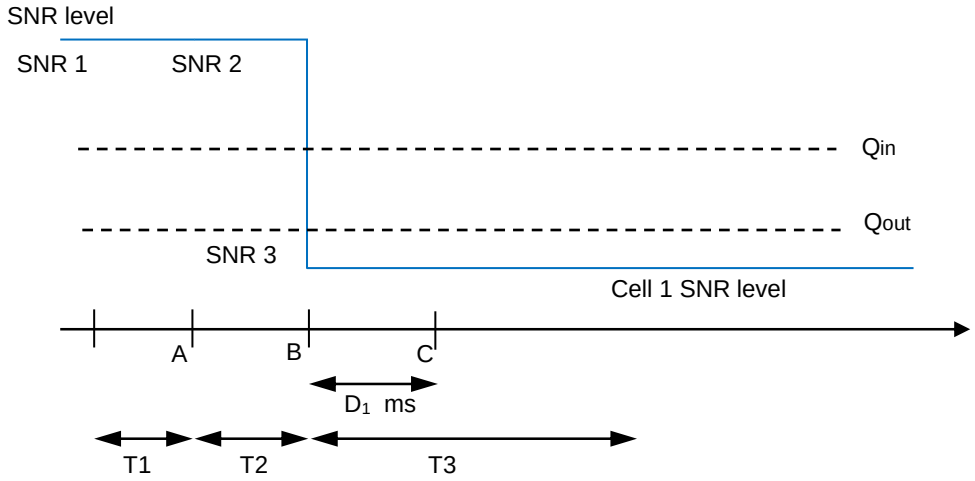

Figure 6.5.1.9.4-1: SNR variation for CSI-RS out-of-sync testing

6.5.1.9.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 6.5.1.9.4.1-1.

Table 6.5.1.9.4.1-1: Supported test configurations for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Configuration	Description
6.5.1.9-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.1.9-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.1.9-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.9.4.1-2.

Table 6.5.1.9.4.1-2: Initial conditions for NR SA radio link monitoring for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.9.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.5.1.9.4.1-3.

2. Message contents are defined in clause 6.5.1.9.4.3.

3. There is one cell in the test, where Cell 1 is the NR PCell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table 6.5.1.9.5-1 for this test. Cell 1 is configured according to Annex C.1.2 and C.1.3.

Table 6.5.1.9.4.1-3: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.X1
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0

T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	2.48
T3		s	4.88
D1		s	4.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

6.5.1.9.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.s.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.

2. Set the parameters of Cell 1 according to T1 in Table 6.5.1.9.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.1.9.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.1.9.5-1. T3 starts.

5. If the SS:

   a) detects uplink power equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in the On-duration part of every DRX cycle in the slots configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect any uplink power higher than OFF power defined in TS 38.521-1 [17] clause 6.3.2.5 from time point C (D1 after the start of T3) until T3 expires,

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

6. When T3 expires the SS shall change the SNR value to T1 as specified in Table 6.5.1.9.5-1.

7. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.1.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and 7.3.1 with the following exceptions:

Table 6.5.1.9.4.3-1: Common Exception messages for NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-9 Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM Table H.3.7-1 with condition DRX.X

Table 6.5.1.9.4.3-2 *SIB1*

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfoSEQUENCE {			
q-RxLevMin	-46	-92 is actual value in dBm (-46 * 2 dBm)	dBm/15kHz or dBm/30kHz
}			
}			

Table 6.5.1.9.4.3-3: RLF-TimersAndConstant

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
}			

Table 6.5.1.9.4.3-4: CellGroupConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
goodServingCellEvaluationRLM-r17 SEQUENCE {			
offset-r17	Not present	If this field is absent, the UE applies the (default) value of 0 dB	
}			
}			
}			

6.5.1.9.5 Test requirement

Tables 6.5.1.9.4.1-3 and 6.5.1.9.5-1 define the primary level settings including test tolerances for Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode.

Table 6.5.1.9.5-1: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta	dB	0		
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB			
EPRE ratio of PBCH to PBCH DMRSPSS_beta	dB			
EPRE ratio of PSS to SSSSSS_beta	dB			

EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1.8	1.8	-15.8
	Config 2		1.8	1.8	-15.8
	Config 3		1.8	1.8	-15.8
N_{oc}	Config 1	dBm/15kHz	-98		
	Config 2		-98		
	Config 3		-98		
goodServingCellEvaluationRLM			configured		
offset in goodServingCellEvaluationRLM		dB	Not configured		
Propagation condition			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.1.9.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 from D.4.1.1 is -18 -TT, which is TBD dB (including test tolerances)..

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on PCell.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.1.10 to 6.5.1.12

6.5.1.13 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode for UE operating on a cell with less than 5MHz BW

Editor's note: This test case is incomplete. The following aspect is either missing or TBD:

- Test tolerance analysis and measurement uncertainty are missing

6.5.1.13.1 Test purpose

The purpose of this test is to verify that the UE supporting less than 5 MHz bandwidth and a long DRX cycle properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell operating on a 3MHz channel bandwidth. This test will partly verify the NR cell radio link monitoring requirements as specified in clause 8.1 of TS 38.133 [6].

6.5.1.13.2 Test applicability

This test applies to all types of NR UE Release 18 supporting less than 5 MHz bandwidth and a long DRX cycle.

6.5.1.13.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.13.

6.5.1.13.4 Test description

There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 6.5.1.13.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

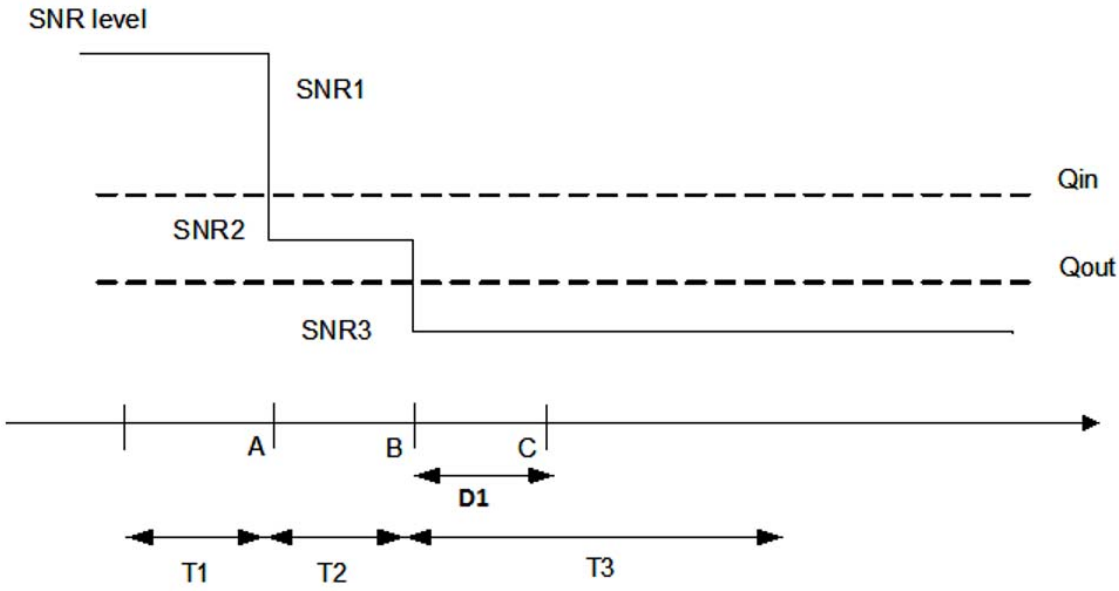

Figure 6.5.1.13.4-1: SNR variation for out-of-sync testing

6.5.1.13.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.1.13.4.1-1.

Table 6.5.1.13.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
6.5.1.13-1	FDD duplex mode, 15 kHz SSB SCS, 3 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.13.4.1-2.

Table 6.5.1.13.4.1-2: Initial conditions for radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode for UE operating on a cell with less than 5MHz mode

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.13.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

General test parameters as specified in Table 6.5.1.3.4.1-4 with config 1 apply except those specified in Table 6.5.1.13.4.1-3.

1. Message contents are defined in clause 6.5.1.13.4.3.
2. Single Cell is used, which is NR FR1 PCell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.
3. Downlink signals for NR cell are initially set up according to Annex C.1.2 and C.1.3.

Table 6.5.1.13.4.1-3: General test parameters for FR1 OOS 12 PRB in DRX mode

Parameter		Unit	Value
			Test 1
$BW_{channel}$	Config 1	MHz	3: $N_{RB,c}$ = 12
RMSI CORESET Reference Channel	Config 1		CR.1.2 FDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.6 FDD
SSB Configuration	Config 1		SSB.13 FR1
	DCI format		1-0
In sync transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	2
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
Out of sync transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	REG bundle size		6
	CP length		Normal
	Mapping from REG to CCE		Distributed

6.5.1.13.4.2 Test Procedure

Same as 6.5.1.3.4.2

6.5.1.13.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and 7.3.1 with the condition “Short_DCI” and with the following exceptions:

Table 6.5.1.13.4.3-1: Common Exception messages for radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode test requirement for a UE operating on a cell with less than 5MHz mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.5-4 with condition SCS15kHz_FDD Table H.3.5-9 Table H.3.7-1 with condition DRX.3

Table 6.5.1.13.4.3-2: RLF-TimersAndConstant

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
n311	n1		
t311	ms1000		
}			

Table 6.5.1.13.4.3-3: SIB1

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfoSEQUENCE {			
q-RxLevMin	-53	-106 is actual value in dBm (-53 * 2 dBm)	dBm/15kHz
}			
}			

6.5.1.13.5 Test Requirement

Cell-specific test parameters as specified in Table 6.5.1.3.5-1 apply for this test except those specified in Table 6.5.1.13.5-1. Test requirements specified in 6.5.1.3.5 apply to this test.

Table 6.5.1.13.5-1: Cell specific test parameters for FR1 OOS 12 PRB in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
SNR on RLM-RS	Config 1	dB	4	-4	-12

6.5.1.14 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE operating on a cell with less than 5MHz BW

Editor's note: This test case is incomplete. The following aspect is either missing or TBD:

- Test tolerance analysis and measurement uncertainty are missing

6.5.1.14.1 Test purpose

The purpose of this test is to verify that the UE supporting less than 5 MHz properly detects the out-of-sync and in sync for monitoring downlink radio link quality of the PCell operating on a 3MHz channel bandwidth. This test will partly verify the FR1 radio link monitoring requirements in TS 38.133 [6] clause 8.1.2.

6.5.1.14.2 Test applicability

This test applies to all types of NR UE from Release 18 onwards for a UE operating on a cell with less than 5 MHz bandwidth.

6.5.1.14.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.14 and 8.1.2.

6.5.1.14.4 Test description

There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 6.5.1.14.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

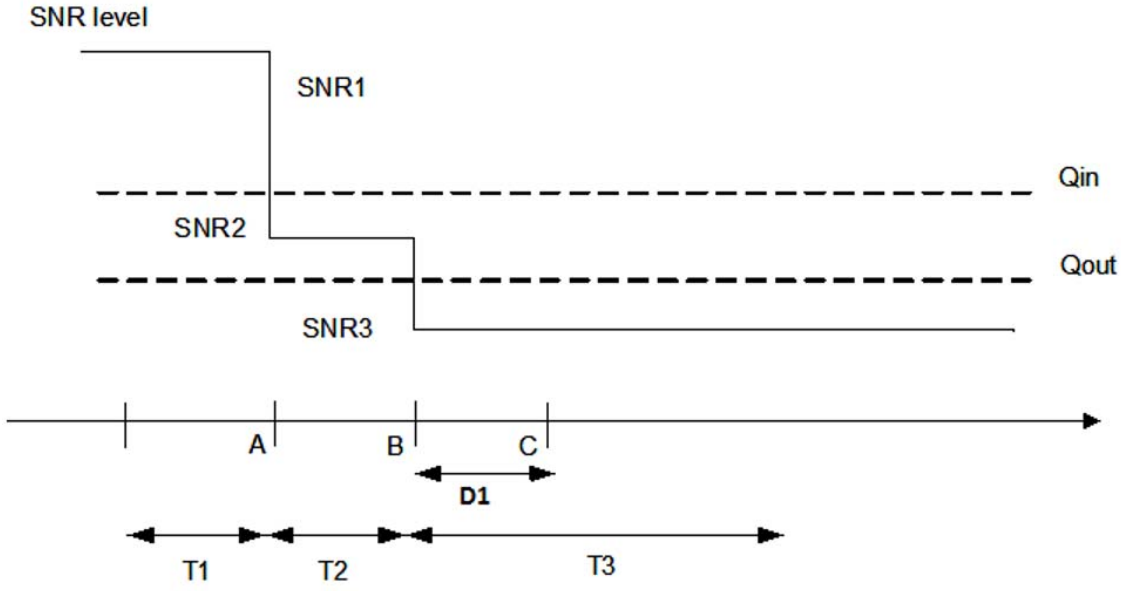

Figure 6.5.1.14.4-1: SNR variation for out-of-sync testing

6.5.1.14.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.1.14.4.1-1.

Table 6.5.1.14.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
6.5.1.14-1	FDD duplex mode, 15 kHz SSB SCS, 3 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.14.4.1-2.

Table 6.5.1.14.4.1-2: Initial conditions for radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for a UE operating on a BW less than 5 MHz BW

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.14.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. Message contents are defined in clause 6.5.1.14.4.3.

2. Single Cell is used, which is NR FR1 PCell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.

3. General test parameters as specified in Table 6.5.1.14.4.1-3 with config 1 apply except those specified in Table 6.5.1.14.4.1-3.

4. Downlink signals for NR cell are initially set up according to Annex C.1.2 and C.1.3.

Table 6.5.1.14.4.1-3: General test parameters for FR1 OOS 15 PRB in non-DRX mode

Parameter		Unit	Value
			Test 1
$BW_{channel}$	Config 1	MHz	3: $N_{RB,c}$ = 15
RMSI CORESET Reference Channel	Config 1		CR.1.3 FDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.7 FDD
SSB Configuration	Config 1		SSB.13 FR1
	DCI format		1-0
In sync transmission parameters	Number of Control OFDM symbols		3
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
Out of sync transmission parameters	Number of Control OFDM symbols		3
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	REG bundle size		6
	CP length		Normal
	Mapping from REG to CCE		Non-Distributed

6.5.1.14.4.2 Test Procedure

Same as 6.5.1.1.4.2.

6.5.1.14.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 and 7.3.1 with condition “Short_DCI” and with the following exceptions:

Table 6.5.1.14.4.3-1: Common Exception messages for radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode test requirement for a UE operating on less than 5 MHz BW

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, GAP_NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier center of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-1 Table H.3.1-6 with conditions gapUE and RLM Table H.3.5-4 with condition SCS15kHz_FDD Table H.3.5-9

Table 6.5.1.14.4.3-2: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

Table 6.5.1.14.4.3-3: *SIB1*

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-53	-106 is actual value in dBm (-53 * 2 dBm)	dBm/15kHz
}			
}			

6.5.1.14.5 Test Requirement

Cell specific test parameters as specified in Table 6.5.1.14.5-1 apply except those specified in Table 6.5.1.14.5-1. Test requirements specified in clause 6.5.1.1.5 apply to this test.

Table 6.5.1.14.5-1: Cell specific test parameters for FR1 PCell

Parameter		Unit	Test 1		
			T1	T2	T3
SNR_SSB of set q_0	Config 1	dB	2	-6	-14

6.5.1.16 NR SA FR1 Radio Link Monitoring In-sync Test for PCell with 3MHz Channel Bandwidth configured with SSB-based RLM RS in DRX mode

Editor's note: This test case is incomplete. The following aspect is either missing or TBD:

- Test tolerance analysis and measurement uncertainty are missing

6.5.1.16.1 Test purpose

The purpose of this test is to verify that the UE supporting less than 5 MHz BW properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell operating on a 3MHz channel bandwidth. This test will partly verify the FR1 radio link monitoring requirements in TS 38.133 [6] clause 8.1.

6.5.1.16.2 Test applicability

This test applies to all types of NR UE from Release 18 onwards for a UE operating on a cell with 3 MHz channel bandwidth.

6.5.1.16.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 6.5.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.1.16 and 8.1.

6.5.1.16.4 Test description

There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.1.16.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

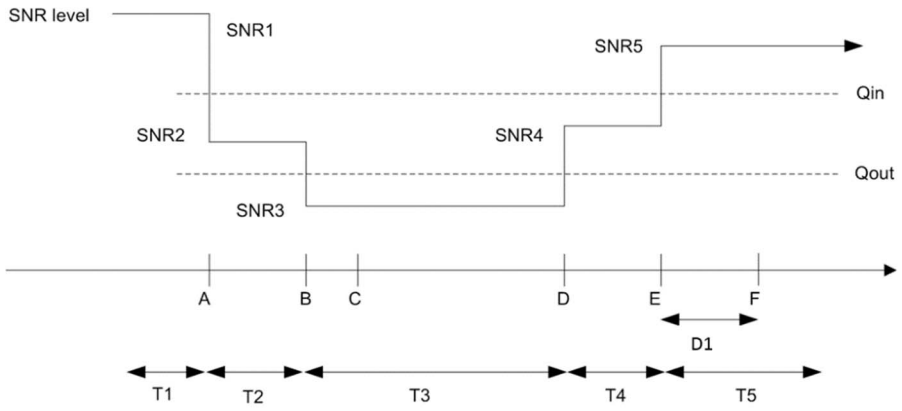

Figure 6.5.1.16.4-1 - SNR variation for in-sync testing

6.5.1.16.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.1.16.4.1-1.

Table 6.5.1.16.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
6.5.1.16-1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 3 MHz (12 PRB)
Note: The If the UE indicates the support for band n100, the UE is required to pass the test with 12 PRB configuration.	

Configure the test equipment and the DUT according to the parameters in Table 6.5.1.16.4.1-2.

Table 6.5.1.16.4.1-2: Initial conditions for radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in DRX mode for a UE operating with 3 MHz channel BW

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.1.16.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.7.4 for TE Part		

1. Message contents are defined in clause 6.5.1.16.4.3.
2. Single Cell is used, which is NR FR1 PCell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.
3. General test parameters as specified in Table 6.5.1.4.4.1-3 with config 1 apply except those specified in Table 6.5.1.16.4.1-3.
4. Downlink signals for NR cell are initially set up according to Annex C.1.2 and C.1.3.

Table 6.5.1.16.4.1-3: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
$BW_{channel}$	Config 1	MHz	3: $N_{RB,c}$ = 12
RMSI CORESET Reference Channel	Config 1		CR.1.2 FDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.6 FDD
SSB Configuration	Config 1		SSB.13.FR1
In sync transmission parameters	Number of Control OFDM symbols, Config 1		2
	Aggregation level, Config 1		2
	Mapping from REG to CCE, Config 1		Distributed
Out of sync transmission parameters	Number of Control OFDM symbols, Config 1		2
	Aggregation level, Config 1		4
	Mapping from REG to CCE, Config 1		Distributed

6.5.1.16.4.2 Test Procedure

Same as 6.5.1.4.4.2.

6.5.1.16.4.3 Message Contents

Same as 6.5.1.4.4.3.

6.5.1.16.5 Test Requirement

Cell specific test parameters as specified in Table 6.5.1.16.5-1 apply except those specified in Table 6.5.1.4.5-1. Test requirements specified in clause 6.5.1.4.5 apply to this test.

Table 6.5.1.16.5-1: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5

SNR on RLM-RS	Config 1	dB	4	-4	-12	0	5.5

6.5.2 Interruption

6.5.2.0 Minimum conformance requirements

6.5.2.0.1 Minimum conformance requirements for interruptions during measurements on deactivated NR SCC

Interruptions on PCell due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [13] is 640 ms or longer.

If the PCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on PCell immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 6.5.2.0.1-1

If the PCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PCell no earlier than X slots before $T_{SMTC_duration}$ and no later than X slots after $T_{SMTC_duration}$, provided the cell specific reference signals from the active serving cells and the deactivated SCell are available in the same slot, where X and $T_{SMTC_duration}$ are given by Table 6.5.2.0.1-2. The interruption shall not exceed requirements in Table 6.5.2.0.1-2.

Interruptions on active SCells due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [13] is 640 ms or longer.

If the activated SCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on an activated SCell immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 6.5.2.0.1-1

If the activated SCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on the activated SCell no earlier than X slots before $T_{SMTC_duration}$ and no later than X slots after $T_{SMTC_duration}$, provided the cell specific reference signals from the active serving cells and the deactivated SCell are available in the same slot, where X and $T_{SMTC_duration}$ are given by Table 6.5.2.0.1-2. The interruption shall not exceed requirements in Table 6.5.2.0.1-2.

Table 6.5.2.0.1-1: Interruption duration for SCell activation/deactivation for inter-band CA

μ	NR Slot length (ms) of victim cell	Interruption length (slot)	
0	1		1
1	0.5		1
2	0.25	Both aggressor cell and victim cell are on FR2	2
		Either aggressor cell or victim cell is on FR1	3
3	0.125	Aggressor cell is on FR2	4
		Aggressor cell is on FR1	5

Table 6.5.2.0.1-2: Interruption duration for SCell activation/deactivation for intra-band CA

μ	NR Slot length (ms)	Interruption length (slots)
0	1	$1 + T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
1	0.5	$1 + T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
2	0.25	$2 + T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
3	0.125	$4 + T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
NOTE 1: $T_{SMTC_duration}$ measured in subframes is - the longest SMTC duration among all above active serving cells and the SCell being activated when one SCell is activated. If SSB configuration		

	(*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being activated, the SSB transmission periodicity is assumed to be 5ms and $T_{SMTC\ duration}$ for the SCell being activated is [x]ms. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being activated, $T_{SMTC\ duration}$ for the SCell being activated is 0ms; - the longest SMTC duration among all active serving cells in the same band when one SCell is deactivated.
NOTE 2:	$N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [7].

The normative reference for this requirement is TS 38.133 [6] clause 8.2.2.2.

6.5.2.0.2 Interruptions at NR SRS carrier based switching

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to another activated carrier;
- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;
- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex and srs-SwitchFromCarrier in TS38.331 [2];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [26].
- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD.
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [2], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101 [5], the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 6.5.2.0.1-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 6.5.2.0.1-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 6.5.2.0.1-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 6.5.2.0.1-2.

Table 6.5.2.0.1-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us)[Note 1]	Interruption length X1 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	2	2
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

Table 6.5.2.0.1-2: Interruption length X2 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) [Note 1]	Interruption length X2 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			60	120
0	1	≤ 200	2	2
1	0.5	≤ 200	2	2
2	0.25	≤ 200	3	3
3	0.125	≤ 200	4	4
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

For intra-band SRS carrier switching in FR1 or FR2, interruptions in Table 6.5.2.0.1-1 and in Table 6.5.2.0.1-2 based on SRS carrier switching time ≤ 200us shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 6.5.2.0.1-1 and in Table 6.5.2.0.1-2 shall apply.

The normative reference for this requirement is TS 38.133 [6] clause 8.2.2.9.

6.5.2.1 NR SA FR1 interruptions during measurements on deactivated NR SCC

6.5.2.1.1 Test purpose

To verify UE's ability to complete NR PCell interruptions during the measurement on the deactivated NR SCC within the missed ACK/NACK rate in standalone NR requirements.

6.5.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 2DL CA.

6.5.2.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.5.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.2.1.

6.5.2.1.4 Test description

6.5.2.1.4.1 Initial conditions

Test 6.5.2.1 can be run in one of the configurations defined in this clause. Supported test configurations for NR PCell are shown in Table 6.5.2.1.4.1-1. Supported test configurations for NR SCell are shown in Table 6.5.2.1.4.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently.

Table 6.5.2.1.4.1-1: Supported test configurations for NR PCell

Config	Description
6.5.2.1-1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
6.5.2.1-2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6.5.2.1-3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table 6.5.2.1.4.1-1A: Supported test configurations for NR SCell

$Config_{SCell}$	Description
6.5.2.1-1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
6.5.2.1-2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6.5.2.1-3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 6.5.2.1.4.1-2.

Table 6.5.2.1.4.1-2: Initial conditions for NR SA FR1 interruptions during measurements on deactivated NR SCC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 6.5.2.1.4.1-3

2. Message contents are defined in clause 6.5.2.1.4.3.

3. There are two NR carriers and two cells specified in the test. Cell 1 is the PCell on one NR carrier, Cell 2 is the SCell on the other NR carrier. Cell 1 and Cell 2 shall be configured according to Annex C.1.1 and C.1.2.

Table 6.5.2.1.4.1-3: General test parameters for NR SA FR1 interruptions during measurements on deactivated NR SCC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR RF channels
Active PCell		Cell1	PCell on NR RF channel number 1.
Configured deactivated SCell		Cell2	Deactivated SCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell 2

DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

6.5.2.1.4.2 Test procedure

The test consists of two cells: Cell1 and Cell2. Cell1 is PCell and Cell2 is deactivated SCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. Cell1 shall be configured as PCell and Cell2 shall be configured as SCell.. During T1, PCell is continuously scheduled in DL.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. The SS shall transmit an RRCReconfiguration message including measCycleSCell or allowInterruptions for the deactivated NR SCell.
3. The UE shall transmit RRCReconfigurationComplete message.
4. Set the parameters according to Table 6.5.2.1.5-1. Propagation conditions are set according to Annex C.2.1. T1 starts.
5. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.
6. If more than 99.5% of uplink transmissions are received by SS then count a success for the event “ACK/NACK”. Otherwise count a fail for the event “ACK/NACK”.
7. If no longer than X consecutive DTX is observed by the SS, then count a success for the event “DTX”. Otherwise count a fail for the event “DTX”. Where
   - For PCell test configuration 6.5.2.1-1,
     - X = interruption length+k_1 if $k_1 \leq$ interruption length
     - X = interruption length if k_1 > interruption length

     Note: UE expects that the SS won't use $k_1 = 3$ for PCell test configuration 4.5.2.3-1 and 4.5.2.3-4.
   - For PCell test configuration 6.5.2.1-2 and 6.5.2.1-3,
     - X = interruption length.
   - interruption length is given in table 6.5.2.1.5-2 for inter-band case and in 6.5.2.1.5-3 for intra-band case.
8. After the RRC connection release, the SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5),

   or

   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
9. Repeat step 2-8 until a test verdict has been achieved.

Each of the events "ACK/NACK" and "DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

6.5.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-2 with Condition Deactivated SCell; Table H.3.1-4 with A3-offset = 15
Specific message contents exceptions for SCell Test Configuration 6.5.2.1-1, 6.5.2.1-2	Table H.3.1-3 with Condition Deactivated SCell and SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for SCell Test Configuration 6.5.2.1-3	Table H.3.1-3 with Condition Deactivated SCell and SSB.2 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.5.2.1.4.3-2: ServingCellConfig (Cell 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
servingCellMO	2	MeasObjectId for SCell in Table H.3.1-2	
}			

6.5.2.1.5 Test requirement

Table 6.5.2.1.5-1 and Table 6.5.2.1.5-1A defines the primary level settings including test tolerances for NR SA FR1 interruptions during measurements on deactivated NR SCC.

Table 6.5.2.1.5-1: NR cell specific test parameters for NR PCell for NR SA FR1 interruptions during measurements on deactivated NR SCC

Parameter		Unit	Cell1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$			Note 9
$BW_{occupied}$	Config 1,2	RB	52 Note 7
	Config 3		106 Note 8
Initial DL BWP Configuration			DLBWP.0.1
Dedicated DL BWP Configuration			DLBWP.1.1
Initial UL BWP Configuration			ULBWP.0.1
Dedicated UL BWP Configuration			ULBWP.1.1
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.2 TDD
	Config 3		SR.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
	Config 1		CCR.1.1 FDD

Dedicated CORESET parameters	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
OCNG Patterns	Config 1,2		OP.1 Note 7
	Config 3		OP.1 Note 8
SMTC Configuration			SMTC.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
Io Note3	Config 1,2	dBm/9.36MHz	-58.96
	Config 3	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 5		µs	-
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in clause 12 of TS 38.213 [3].
Note 7: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 8: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 9: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table 6.5.2.1.5-1A: NR cell specific test parameters for NR SCell for NR SA FR1 interruptions during measurements on deactivated NR SCC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$			Note 9
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 7
	$Config_{SCell}$ 3		106 Note 8
Initial DL BWP Configuration			DLBWP.0.1
Dedicated DL BWP Configuration			DLBWP.1.1
Initial UL BWP Configuration			N/A
Dedicated UL BWP Configuration			N/A
	$Config_{SCell}$ 1		SR.1.1 FDD

PDSCH Reference measurement channel	$Config_{SCell}$ 2		SR.1.2 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD
CSI-RS for tracking	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell}$ 1		CCR.1.1 FDD
	$Config_{SCell}$ 2		CCR.1.1 TDD
	$Config_{SCell}$ 3		CCR.2.1 TDD
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 7
	$Config_{SCell}$ 3		OP.1 Note 8
SMTC Configuration			SMTC.4
SSB Configuration	$Config_{SCell}$ 1,2		SSB.5 FR1
	$Config_{SCell}$ 3		SSB.6 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note 2		dBm/15 kHz	-104
SS-RSRP Note 3		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
N_{oc} Note 2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
Io Note3	$Config_{SCell}$ 1,2	dBm/9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/38.16MHz	-52.86
Time offset to Cell1 Note 5		µs	3
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselvess.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in clause 12 of TS 38.213 [3].
Note 7: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 8: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 9: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

The UE shall be continuously scheduled on PCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on PCell.

If the NR PCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PCell immediately before and immediately after an SMTC. Each interruption on NR PCell shall not exceed the value defined in Table 6.5.2.1.5-2.

If the NR PCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PCell no earlier than 1 slot before an SMTC and no later than 1 slot after the SMTC. the interruption on NR PCell shall not exceed the value defined in Table 6.5.2.1.5-3.

Table 6.5.2.1.5-2: Interruption duration if the PCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	1
1	0.5	1

Table 6.5.2.1.5-3: Interruption duration if the PCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	2 + SMTC duration
1	0.5	2 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

6.5.2.2 SA interruptions at NR SRS carrier based switching

6.5.2.2.1 Test purpose

The purpose of this test is to verify PCell interruptions during carrier-based switching to one carrier not configured for PUCCH/PUSCH transmission from a CC with PUCCH/PUSCH transmission, when a UE needs to transmit aperiodic SRS.

6.5.2.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting 2 DL CA.

6.5.2.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.2.2.

6.5.2.2.4 Test description

6.5.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.2.2.4.1-1.

Table 6.5.2.2.4.1-1: Supported test configurations for SA interruptions at NR SRS carrier based switching

Configuration	Description
6.5.2.2-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD – TDD duplex mode
6.5.2.2-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD – TDD duplex mode
6.5.2.2-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD – TDD duplex mode
NOTE.1: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.5.2.2.4.1-2.

Table 6.5.2.2.4.1-2: Initial conditions for SA interruptions at NR SRS carrier based switching

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2..	
Channel bandwidth	As specified by the test configuration selected from Table 6.5.2.2.4.1-1.	

Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 6.5.2.2.4.1-3.

2. Message contents are defined in clause 6.5.2.2.4.3.

3. There are two NR carriers and one E-UTRA carrier, and three cells specified in the test. Each cell is on a different carrier. Cell1 Is E-UTRAN PCell, Cell2 is NR FR1 PSCell and Cell 3 is NR activated Scell. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 and Cell 3 shall be configured according to clauses C.1.1 and C.1.2.

Table 6.5.2.2.4.1-3: General test parameters for SA interruptions at NR SRS carrier based switching

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1
Configured SCell		Cell 2	Activated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	5	
T2	ms	40	UE shall perform SRS switching during T2

6.5.2.2.4.2 Test procedure

The test consists of two cells: Cell1 and Cell2. Cell1 is the Pcell and Cell2 is activated SCell without PUCCH/PUSCH transmission. The test consists of two time periods, with duration of T1 and T2. Prior to the start of the test, the UE is configured with the SRS carrier based switching between PCell and SCell. UE shall also indicate SRS-SwitchingTimeNR in the capabilities.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.2 with the message exceptions as in 6.5.2.2.4.3.

3. Set the parameters according to T1 in Table 6.5.2.2.5-1. Propagation conditions are set according to clause C.2.1. T1 starts.

4. The SS activates Scell (Cell2) and starts to schedule DL transmission continuously on both PCell and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK on PCell.

5. Set the parameters according to T2 in Tables 6.5.2.2.5-1. T2 starts.

6. Immediately at the beginning of T2, SRS is requested via DCI format 2_3 and the UE shall initiate NR SRS switching.

7. If the interruption in the received ACK/NACK on PCell during the switching from NR PCell to NR SCell exceeds the value as defined in Table 6.5.2.2.5-2, increase the number of failed iterations by one, otherwise increase the number of passed iterations by one.

8. the SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

9. After the RRC connection release, the SS:
- transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
or
- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until a test verdict has been achieved.

6.5.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions.

Table 6.5.2.2.4.3-1: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
uplinkConfig SEQUENCE {			
carrierSwitching	*SRS-CarrierSwitching*		
}			
}			

Table 6.5.2.2.4.3-2: *SRS-CarrierSwitching*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-181			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-CarrierSwitching ::= SEQUENCE {			
srs-SwitchFromServCellIndex	1		
srs-SwitchFromCarrier	nUL		
}			

Table 6.5.2.2.4.3-3: SRS-Config

Derivation Path: TS 38.508-1 [14], Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SRS-ResourceSet {	1 entry		
SRS-ResourceSet[1] SEQUENCE {		entry 1	
srs-ResourceSetId	0		
srs-ResourceIdList SEQUENCE (SIZE(1..maxNrofSRS-ResourcesPerSet)) OF SRS-ResourceId {	1 entry		
SRS-ResourceId[1]	0	entry 1	
}			
resourceType CHOICE {			
aperiodic SEQUENCE {			
}			
}			
usage	antennaSwitching		
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SRS-Resource {	1 entry		
SRS-Resource[1] SEQUENCE {		entry 1	
resourceMapping SEQUENCE {			
startPosition	1		
nrofSymbols	n1		

repetitionFactor	n1		
}			
freqDomainPosition	0		
freqDomainShift	0		
freqHopping SEQUENCE {			
c-SRS	12		
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			
aperiodic SEQUENCE {			
}			
}			
}			
}			
}			

6.5.2.2.5 Test requirement

Table 6.5.2.2.5-1 defines the primary level settings including test tolerances for SA FR1 interruptions at NR SRS carrier based switching.

Table 6.5.2.2.5-1: Cell specific test parameters for SA interruptions at NR SRS carrier based switching

Parameter		Unit	T1		T2	
			Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode	Config 1		FDD	TDD	FDD	TDD
	Config 2,3		TDD			
TDD configuration	Config 1		N/A	TDDConf.1.1	N/A	TDDConf.1.1
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
Downlink initial BWP Configuration			DLBWP.0.1			
Downlink dedicated BWP Configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TCI state			TCI.State.0			
TRS Configuration			TRS.1.1 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 TDD	SR.1.1 FDD	SR.1.1 TDD
	Config 2		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
	Config 3		SR2.1 TDD	SR2.1 TDD	SR2.1 TDD	SR2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.1.1 TDD	CCR.1.1 FDD	CCR.1.1 TDD
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.1.1 TDD	CR.1.1 FDD	CR.1.1 TDD

	Config 2		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
	Config 3		CR2.1 TDD	CR2.1 TDD	CR2.1 TDD	CR2.1 TDD
OCNG Patterns			OP.1			
SRS Configuration	Config 1,2		SRS.4 TDD			
	Config 3		SRS.5 TDD			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
SMTC configuration			SMTC.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2,4,5	dBm/15kHz	-104			
	Config 3,6		-101			
$\hat{E}_s / I_{ot}$		dB	17			
$\hat{E}_s / N_{oc}$		dB	17			
SS-RSRP Note3	Config 1,2,4,5	dBm/SCS	-87			
	Config 3,6		-84			
SCH_RP Note 3		dBm/15 kHz	-87			
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

The UE shall be scheduled on PCell continuously throughout the test. During the time duration T2, the interruption on PCell shall not be more than the values specified in Table 6.5.2.2.5-2 depending on the reported *SRS-SwitchingTimeNR* capability.

Table 6.5.2.2.5-2: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) Note 1	Interruption length X1 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	2	2
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7

		900	12	10
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

6.5.3 SCell activation and deactivation delay

6.5.3.0 Minimum conformance requirements

6.5.3.0.1 Minimum conformance requirements for SCell activation and deactivation delay

Same as in clause 4.5.3.0.1.

6.5.3.0.2 Minimum conformance requirements for TRS based SCell activation

For a UE supporting *scellWithoutSSB-InterBandCA-r18* if the SCell being activated belongs to FR1 and if the UE is not provided with SSB configuration (*absoluteFrequencySSB*) in the target SCell (FrequencyInfoDL) nor SMTC configuration for the target SCell, and if there is one collocated active reference serving cell on different FR1 band, when the following conditions are fulfilled,

- The RTD between the target SCell and the collocated reference serving cell is within CP where CP is corresponding to the SCS of SSB-less SCell, and
- The [EPRE] difference at the UE is smaller than or equal to [12] dB, where [EPRE] difference is the power difference between TRS/A-TRS symbol on the SSB-less SCell and SSB symbol on the reference serving cell [after the compensation for AGC], and
- The RS(s) of the SSB-less SCell being activated is (are) QCL-TypeA with TRS(s) of the SSB-less SCell being activated, and the TRS(s) of the SSB-less SCell being activated is (are) further QCL-TypeC with SSB(s) of an inter-band active serving cell, and the inter-band active serving cell shall be same as the reference serving cell.

where the reference serving cell can be indicated by higher layer parameter *referenceCell-r18*. If UE is not indicated with *referenceCell-r18*, the reference serving cell is assumed to be the QCL-typeC source cell if there is only one active QCL-typeC source cell configured.

Where $T_{activation_time}$ is

- $T_{first_TRS} + T_{TRS}$ +5 ms, if aperiodic CSI-RS resources are not configured for SCell activation or UE do not support *aperiodicCSI-RS-FastScellActivation-r17*
- $T_{first_ATRS} + T_{gap} + T_{ATRS}$ + 5 ms if aperiodic CSI-RS resources are configured for Scell activation for UE supporting *aperiodicCSI-RS-FastScellActivation-r17*

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n (where n mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot n + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$, as defined in TS 38.133 [6] clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $n + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$, as defined in TS 38.133 [6] clause 8.3, where $N_{\mathrm{interruption}}$ is the interruption length given in TS 38.133 [6] clause 8.2.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The interruption length X2 on any activated serving cell are according to Table 6.5.3.0.2-1 and 6.5.3.0.2-2.

Table 6.5.3.0.2-1: Interruption length X2 for SCell activation/deactivation for inter-band CA

μ	NR Slot length (ms) of victim cell	Interruption length X2 (slots)	
0	1		1
1	0.5		1

Table 6.5.3.0.2-2 Interruption duration for SCell activation/deactivation for intra-band CA

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
1	0.5	1 + $T_{SMTC_duration}$ * $N_{slot}^{subframe,\mu}$
NOTE 1: $T_{SMTC_duration}$ measured in subframes is - the longest SMTC duration among all above active serving cells and the SCell being activated when one SCell is activated. If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being activated, the SSB transmission periodicity is assumed to be 5ms and $T_{SMTC\ duration}$ for the SCell being activated is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being activated. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being activated, $T_{SMTC\ duration}$ for the SCell being activated is 0ms; - the longest SMTC duration among all active servingNOTE 2: $N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [6].		

The normative reference for this requirement is TS 38.133 [6] clause 8.3.2.

6.5.3.1 NR SA FR1 SCell activation and deactivation of known SCell in non-DRX for 160ms SCell measurement cycle

6.5.3.1.1 Test purpose

This test is to verify that the SCell activation and deactivation times are within the requirements in TS 38.133 [6] clause 8.3, when the SCell in FR1 is known by the UE at the time of activation.

6.5.3.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards and supporting 2DL CA.

6.5.3.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.3.1.

6.5.3.1.4 Test description

6.5.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for NR PCell are shown in Table 6.5.3.1.4.1-1. Supported test configurations for NR SCell are shown in Table 6.5.3.1.4.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently.

Table 6.5.3.1.4.1-1: supported test configurations for NR PCell

Config	Description
6.5.3.1-1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode

6.5.3.1-2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6.5.3.1-3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table 6.5.3.1.4.1-1A: Supported test configurations for NR SCell

$Config_{SCell}$	Description
6.5.3.1-1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
6.5.3.1-2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6.5.3.1-3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 6.5.3.1.4.1-2 and Table 6.5.3.1.4.1-3.

Table 6.5.3.1.4.1-2: Initial conditions for known FR1 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.3.1.5-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.1	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

Table 6.5.3.1.4.1-3: General test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.

T_{HARQ}	ms	PCell Config 1: 2 PCell Config 2: 3 PCell Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [8] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13].

1. Message contents are defined in clause 6.5.3.1.4.3.
2. There are two NR carriers, each with one cell. Cell 1 is NR FR1 PCell and Cell 2 is the deactivated SCell. Cell 1 and Cell 2 are configured according to Annex C.1.2 and C.1.3.

6.5.3.1.4.2 Test procedure

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot n + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$, as defined in TS 38.133 [6] clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $n + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$, as defined in TS 38.133 [6] clause 8.3, where $N_{\mathrm{interruption}}$ is the interruption length given in TS 38.133 [6] clause 8.2.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot m + $\frac{\mathrm{T_{HARQ}}+3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] clause 8.3, and The starting point of any PCell interruption due to the deactivation shall occur in the slot m + 1 + $\frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to m + 1 + $\frac{\mathrm{T_{HARQ}}+3\mathrm{ms}}{NR\ slot\ length}$, as defined in TS 38.133 [6] clause 8.3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Tables 6.5.3.1.4.1-3 and 6.5.3.1.5**-**1. Propagation conditions are set according to Annex C clauses C.2.2.
3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1 and provide measurement configurations.

3a. The UE sends a *MeasurementReport* message. If the TE doesn't receive the *MeasurementReport* during T1, go to step 9.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.
5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n and T2 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot s_{first_CSI} = n + 1 + $\frac{\mathrm{T_{HARQ}+3ms+}T_{\mathrm{CSI_Reporting}}}{NR\ slot\ length}$,

     - or slot $s^{int}_{first_CSI} = n + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting}+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot s_{first_CSI} was subject to interruption,

     - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI}$ = n + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$,

     - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

     - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if slot $s_{nonzero_CQI}$ was subject to interruption,

   - and DTX is not observed by the SS outside the slot $n + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

- Then the number of successes for the event “Activation” is increased by one. Otherwise, count a fail for the event “Activation” and go to step 9.

7. When T2 expires, the SS deactivate SCC by sending the deactivation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m and T3 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 8, otherwise go to step 9.

8. The UE shall stop sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell during SCell deactivation.

   - If the last CSI report is received by the SS earlier than or equal to slot m + $\frac{\mathrm{T_{HARQ}+3}ms}{NR\ slot\ length}$

   - and DTX is not observed by the SS outside the slot m + 1 + $\frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T3,

   - Then the number of successes for the event “Deactivation” is increased by one. Otherwise, count a fail for the event “Deactivation”.

9. When T3 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event “Activation” in step 6, or Deactivation in step 7 was not acknowledged, the SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

10. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

11. After the RRC connection release, the SS:
    - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
    or
    - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

12. Repeat steps 2-11 until a test verdict has been achieved.

Each of the events “Activation” and “Deactivation” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.
If all events pass, the test passes. If one event fails, the test fails.

6.5.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 6.5.3.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell;

Table 6.5.3.1.4.3-2: *RRCReconfiguration*: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig	Table 6.5.3.1.4.3-2A	
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell	Table 6.5.3.1.4.3-5	
}			
}			
}			
}			

Table 6.5.3.1.4.3-2A: MeasConfig (Table 6.5.3.1.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 6.5.3.1.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 6.5.3.1.4.3-4	
}			
}			
}			
}			

Table 6.5.3.1.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 6.5.3.1.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
reportAmount	r16		
}			
}			
}			

Table 6.5.3.1.4.3-5: CellGroupConfig-SCell (Table 6.5.3.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 6.5.3.1.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 6.5.3.1.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 6.5.3.1.4.3-6: ServingCellConfig-SpCell (Table 6.5.3.1.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**

ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 6.5.3.1.4.3-7: ServingCellConfig-SCell (Table 6.5.3.1.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

6.5.3.1.5 Test requirement

Table 6.5.3.1.5-1 and Table 6.5.3.1.5-2 defines the primary level settings including test tolerances for all tests.

Table 6.5.3.1.5-1: Cell specific test parameters for NR PCell for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		**Unit**	**Cell 1**		
			T1	**T2**	**T3**
Duplex mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
$BW_{channel}$		MHz	Note 7		
$BW_{occupied}$	Config 1,2	RB	52 Note 5		
	Config 3		106 Note 6		
Initial BWP configuration			DLBWP.0.1		
TCI state			TCI.State.0		
TRS Configuration	Config 1		TRS.1.1 FDD		
	Config 2		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		
	Config 2		SR.1.1 TDD		
	Config 3		SR.2.1 TDD		
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
RMSI CORESET parameters	Config 1		CR.1.1 FDD		
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
OCNG Patterns	Config 1,2		OP.1 Note 5		
	Config 3,		OP.1 Note 6		
SSB Configuration	Config 1,2		SSB.1 FR1		
	Config 3		SSB.2 FR1		
CSI-RS configuration for CSI reporting Note 8	Config 1		CSI-RS.1.1 FDD		
	Config 2		CSI-RS.1.1 TDD		
	Config 3		CSI-RS.2.1 TDD		
SMTC configuration			SMTC.1		
reportConfigType			periodic		
reportQuantity			cri-RI-PMI-CQI		
CSI reporting periodicity	Config 1,2	slot	5		
	Config 3		10		
CSI reporting offset	Config 1,2	slot	3		
	Config 3		5		

EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2	Config 1,2	dBm/SCS	-104
	Config 3		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-87
	Config 3		-84
SCH_RP Note 3		dBm/15 kHz	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.87
Correlation Matrix and Antenna configuration			2x2 Low
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

Table 6.5.3.1.5-2: Cell specific test parameters for NR SCell for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 2		
			T1	T2	T3
Duplex mode	$Config_{SCell}$ 1		FDD		
	$Config_{SCell}$ 2,3		TDD		
TDD configuration	$Config_{SCell}$ 1		Not applicable		
	$Config_{SCell}$ 2		TDDConf.1.1		
	$Config_{SCell}$ 3		TDDConf.2.1		
$BW_{channel}$		MHz	Note 7		
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 5		
	$Config_{SCell}$ 3		106 Note 6		
Initial BWP configuration			DLBWP.0.1		
TCI state			TCI.State.0		
TRS Configuration	$Config_{SCell}$ 1		TRS.1.1 FDD		
	$Config_{SCell}$ 2		TRS.1.1 TDD		
	$Config_{SCell}$ 3		TRS.1.2 TDD		
PDSCH Reference measurement channel	$Config_{SCell}$ 1		N/A		
	$Config_{SCell}$ 2		N/A		
	$Config_{SCell}$ 3		N/A		
Dedicated CORESET parameters	$Config_{SCell}$ 1		N/A		
	$Config_{SCell}$ 2		N/A		
	$Config_{SCell}$ 3		N/A		
	$Config_{SCell}$ 1		N/A		

RMSI CORESET parameters	$Config_{SCell}$ 2		N/A
	$Config_{SCell}$ 3		N/A
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 5
	$Config_{SCell}$ 3,		OP.1 Note 6
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
CSI-RS configuration for CSI reporting Note 8	$Config_{SCell}$ 1		CSI-RS.1.1 FDD
	$Config_{SCell}$ 2		CSI-RS.1.1 TDD
	$Config_{SCell}$ 3		CSI-RS.2.1 TDD
SMTC configuration			SMTC.1
reportConfigType			N/A
reportQuantity			N/A
CSI reporting periodicity	$Config_{SCell}$ 1,2	slot	N/A
	$Config_{SCell}$ 3		N/A
CSI reporting offset	$Config_{SCell}$ 1,2	slot	N/A
	$Config_{SCell}$ 3		N/A
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note3	$Config_{SCell}$ 1,2	dBm/SCS	-87
	$Config_{SCell}$ 3		-84
SCH_RP Note 3		dBm/15 kHz	-87
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/ 38.16MHz	-52.87
Correlation Matrix and Antenna configuration		2x2 Low	
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

During T2 the UE shall send the first CSI report for SCell no later than the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$ UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to

interruption. Whether CSI report in slot n + 1 + $\frac{T_{HARQ}+3ms+T_{CSI_Reporting}}{NR\ slot\ length}$ was interrupted or not is checked by monitoring ACK/NACK sent in PCell in slot n + 1 + $\frac{T_{HARQ}+3ms+T_{CSI_Reporting}}{NR\ slot\ length}$.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot n + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time}$ = $T_{FirstSSB}$+ 5ms, as defined in TS 38.133 [6] section 8.3.

During T2 interruption of PCell/PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, as defined in TS 38.133 [6] section 8.3.

Figures 6.5.3.1.5-1 shows the derivation of the Test procedure requirement for DTX during T2, based on the core requirements for interruption.

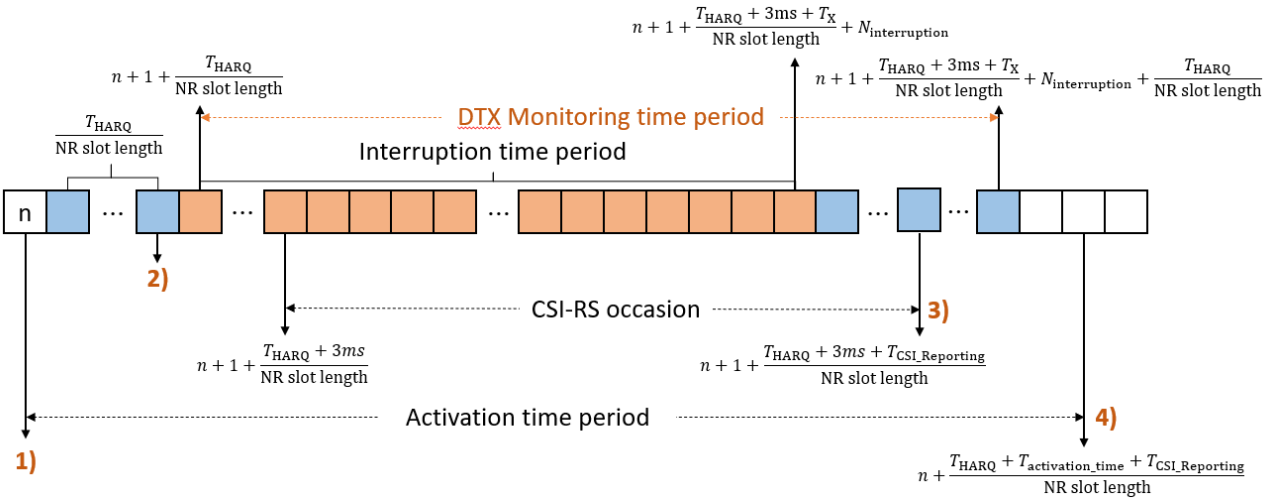

Figure 6.5.3.1.5-1: Procedure derivation for Activation

1) Activation command for SCell
2) ACK for MAC-CE for SCell1 activation
3) First CSI report timing (could be invalid CQI)
4) First non-zero CSI report transmission

During T3 the UE shall stop sending CSI reports for SCell at latest in a slot m + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] section 8.3.

During T3 interruption of PCell during SCell deactivation shall not happen outside the slot m + 1 + $\frac{T_{HARQ}}{NR\ slot\ length}$ to m + 1 + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] section 8.3.

Figures 6.5.3.1.5-2 shows the derivation of the Test procedure requirement for NR PSCell DTX during T3, based on the core requirements for interruption.

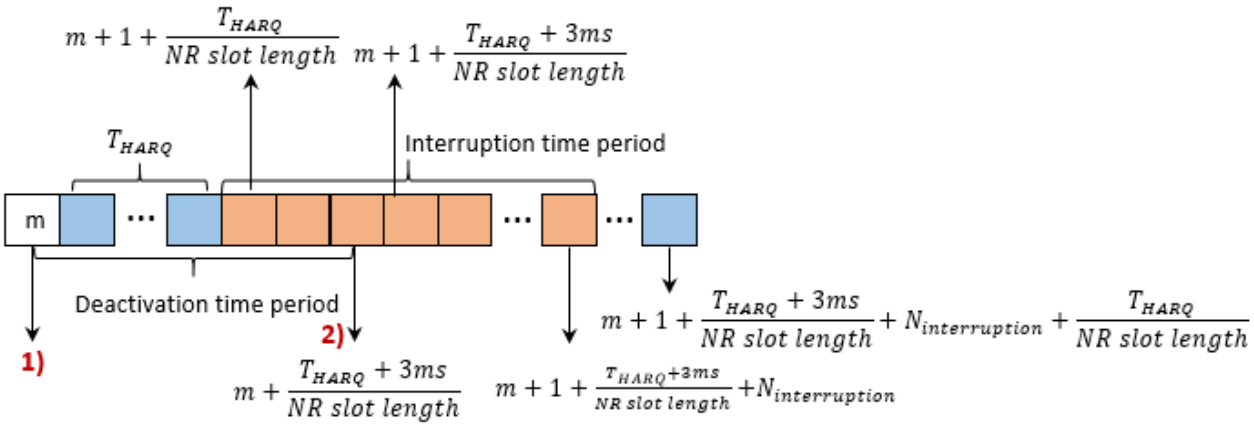

Figure 6.5.3.1.5-2: Procedure derivation for Deactivation

1) Deactivation command for SCell

2) Latest slot stop sending CSI reports for SCell

The interruption on any activated serving cell shall not be more than the values specified for SA in TS 38.133 [6] clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot n + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in TS 38.133 [6] section 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

6.5.3.2 NR SA FR1 SCell activation and deactivation of known SCell in non-DRX for 640ms SCell measurement cycle

6.5.3.2.1 Test purpose

This test is to verify that the SCell activation and deactivation times are within the requirements in TS 38.133 [6] clause 8.3, when the SCell in FR1 is known by the UE at the time of activation.

6.5.3.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards and supporting 2DL CA.

6.5.3.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.3.2.

6.5.3.2.4 Test description

6.5.3.2.4.1 Initial conditions

Same initial conditions as described in section 6.5.3.1.4.1 with following exception:

- The listed parameter values in Tables 6.5.3.2.4.1-2 will replace the values of corresponding parameters in Tables 6.5.3.1.4.1-3.

Table 6.5.3.2.4.1-1: Void

Table 6.5.3.2.4.1-2: General test parameters for known FR1 SCell activation case, 640ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

6.5.3.2.4.2 Test procedure

Same test procedure as described in section 6.5.3.1.4.2.

6.5.3.2.4.3 Message contents

Same message contents as described in section 6.5.3.1.4.3 with following exception:

- Table 6.5.3.1.4.3-3 is replaced by Table 6.5.3.2.4.3-1.

Table 6.5.3.2.4.3-1: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		

6.5.3.2.5 Test requirement

Same test requirement as described in section 6.5.3.1.5, except $T_{activation_time}$ will be replaced with the value $T_{FirstSSB_MAX} + T_{rs} + 5ms$.

6.5.3.3 NR SA FR1 SCell activation and deactivation of unknown SCell in non-DRX

6.5.3.3.1 Test purpose

This test is to verify that the SCell activation and deactivation times are within the requirements stated in TS 38.133 [6] clause 8.3, when the SCell in FR1 is unknown by the UE at the time of activation.

6.5.3.3.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards and supporting 2DL CA.

6.5.3.3.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.3.3.

6.5.3.3.4 Test description

6.5.3.3.4.1 Initial conditions

Same initial conditions as described in section 6.5.3.1.4.1 with following exception:

- The listed parameter values in Tables 6.5.3.3.4.1-2 will replace the values of corresponding parameters in Tables 6.5.3.1.4.1-3.

Table 6.5.3.3.4.1-1: Void

Table 6.5.3.3.4.1-2: General test parameters for unknown FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
T1	ms	100	During this time the PSCell shall be known and the SCell configured, but not detected.

6.5.3.3.4.2 Test procedure

Same test procedure as described in section 6.5.3.1.4.2, except step3 and step 5 are replaced by following steps:

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1. The SCell (Cell 2) shall be powered OFF till T2 starts.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n, power ON the SCell (Cell2), T2 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

and,

- step 3a is removed.

6.5.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 6.5.3.3.4.3-1: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 6.5.3.3.4.3-2	
}			
}			
}			
}			

Table 6.5.3.3.4.3-2: CellGroupConfig (Table 6.5.3.3.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
spCellConfigDedicated	ServingCellConfig-SpCell	Table 6.5.3.3.4.3-3	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 6.5.3.3.4.3-4	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 6.5.3.3.4.3-3: ServingCellConfig-SpCell (Table 6.5.3.3.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 6.5.3.3.4.3-4: ServingCellConfig-SCell (Table 6.5.3.3.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

6.5.3.3.5 Test requirement

Same test requirement as described in section 6.5.3.1.5, except $T_{activation_time}$ will be replaced with the value $T_{FirstSSB_MAX} + T_{SMTC_MAX} + 2*T_{rs} + 5ms$

6.5.3.4 NR SA FR1 direct SCell activation at SCell addition of known SCell

6.5.3.4.1 Test purpose

The purpose of this test is to verify that the direct SCell activation delay and interruption is within the requirements, when the SCell in FR1 is known by the UE at the time of activation.

6.5.3.4.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and supporting 2DL CA and direct SCell activation.

6.5.3.4.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.3.4.

6.5.3.4.4 Test description

6.5.3.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for NR PCell are shown in Table 6.5.3.4.4.1-1. Supported test configurations for NR SCell are shown in Table 6.5.3.4.4.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently.

Table 6.5.3.4.4.1-1: supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table 6.5.3.4.4.1-1A: Supported test configurations for NR PSCell

$Config_{SCell}$	Description

1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 6.5.3.4.4.1-2 and Table 6.5.3.4.4.1-3.

Table 6.5.3.4.4.1-2: Initial conditions for known FR1 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.3.4.5-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.1	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

Table 6.5.3.4.4.1-3: General test parameters for known FR1 SCell activation case

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Inter-frequency neighbour cell (SCell to-be)		Cell 2	Inter-frequency neighbour cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Measurement gap pattern		gp0	Measurement gap is used during parts of time period T1 for detection of Cell 2.
CSI reporting periodicity	ms	2	CSI reporting periodicity for periodic reporting of CQI for PCell and, when added, SCell.
SCell measurement cycle (measCycleSCell)	ms	160	Measurement cycle for SCell does not come into effect in direct activation at SCell addition.
Timing offset between Cell 1 and Cell 2	µs	≤ MRTD	The value of maximum timing offset depends upon the carrier aggregation scenario.
T1	s	7	During this time period the PCell shall be known and Cell 2 shall be detected as an inter-frequency neighbour cell.
T2	s	1	During this time period Cell 2 shall be configured and directly activated as SCell.
A3-offset	dB	-15	
THARQ	ms	k1×NR slot length	k1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by dl-DataToUL-ACK if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [8]

TCSI_Reporting	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13]
k	ms	$k_1 + 3 \cdot N_{slot}^{subframe,\mu} + 1$	As specified in clause 4.3 of TS 38.213 [8]

1. Message contents are defined in clause 6.5.3.4.4.3.

2.There are two NR carriers, each with one cell. Cell 1 is NR FR1 PCell and Cell 2 is the SCell. Cell 1 and Cell 2 are configured according to Annex C.1.2 and C.1.3.

6.5.3.4.4.2 Test procedure

The test consists of two successive time periods with duration T1 and T2, respectively. There are two carriers, each with one cell. Cell 1 (PCell) is on RF channel 1 (PCC), and Cell 2 (SCell) is on RF channel 2 (SCC). Cell 1 and Cell 2 both operate according to one of the configurations in Table 6.5.3.4.4.1-1. Before the test starts the UE is connected to Cell 1 on RF channel 1. The UE is only monitoring RF channel 1 and is not aware of Cell 2 on RF channel 2. The UE is continuously scheduled in PCell throughout the test.

At the beginning of T1 the UE is configured to measure RF channel 2 in measurement gaps. During T1, the UE detects and measures Cell 2 on RF channel 2 and sends a measurement report containing Cell 2 to the test equipment. After having received a measurement report containing Cell 2, the test equipment deconfigures the measurement gaps and thereafter sends a RRCReconfiguration message to the UE by which it configures the SCell (Cell 2) in activated state (*sCellState* is set to *activated*). The time between reception of the last measurement report carrying SCell and transmission of the RRCReconfiguration message directly activating SCell is kept short enough to allow the SCell to remain known to the UE.

Time period T2 starts when the UE receives the RRC connection reconfiguration message at the UE antenna connector. The corresponding slot at which the message is received at the UE antenna connector is denoted *m.* The UE shall complete activation of the SCell no later than in slot $m + \frac{N_{direct}}{\text{NR slot length}}$, where N_{direct} is defined as the time taken for direct SCell activation as specified in clause 8.3.4, TS 38.133 [6]. From slot $m+ \frac{N_{direct}}{\text{NR slot length}}$ and onwards the UE shall report valid CSI both for PCell and SCell. The test equipment verifies the activation time by counting the slots between the RRC connection reconfiguration message is sent and until CSI report with non-zero CQI for both PCell and SCell is received. The test equipment verifies that interruptions on other serving cells are within the requirements by counting ACK/NACKs transmitted in PCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 6.5.3.4.4.1-3 and 6.5.3.4.5**-**1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1 and provide measurement configurations.

3a. The UE sends a *MeasurementReport* message.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. After having received a measurement report containing Cell 2, the SS activates SCC by sending a RRCReconfiguration message to the UE by which it configures the SCell (Cell 2) in activated state as defined in message contents table 6.5.3.4.4.3-5.

6. The UE shall start reporting CSI in PSCell in slot ($m+k+T_{RRC_process}$), where $T_{RRC_process}$ is the RRC procedure delay defined in clause 12 of TS 38.331 [13], and Tx is the time to the end of the first complete the SSB burst as specified in TS 38.133 [6] clause 8.3.4. UE shall report CQI index 0 (out-of-range) until the SCell activation has been completed, and the SS shall monitor CSI reports for SCell sent from the UE according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot $m + 1 + \frac{T_{HARQ}+T_1+ T_{RRC_process} +T_{(CSI_Reporting)}}{NR\ slot\ length}$,

- or slot $m + 1 + \frac{T_{HARQ}+\text{TRRC_process}+T_(CSI_Reporting)+T_1+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot m + 1 + $\frac{\text{T}_{\text{HARQ}}+T_1+\text{TRRC_process}+\text{T_(CSI_Reporting)}}{NR\ slot\ length}$ was subject to interruption,

- and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot m + $\frac{N_{\text{direct}}}{\text{NR slot length}}$,

  - or the next available uplink resource if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{N_{\text{direct}}}{\text{NR slot length}}$

- and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+\text{TRRC_process}+T_1+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

- Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a failure was counted for the event "Activation" in step 6, the SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. After the RRC connection release, the SS:
- transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
or
- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until a test verdict has been achieved.

Each of the event “Activation” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

6.5.3.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL , with the following exceptions:

Table 6.5.3.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell;

Table 6.5.3.4.4.3-2: *RRCReconfiguration*: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig	Table 6.5.3.4.4.3-2A	

nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell	Table 6.5.3.4.4.3-5	
}			
}			
}			
}			

Table 6.5.3.4.4.3-2A: MeasConfig (Table 6.5.3.4.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 6.5.3.4.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 6.5.3.4.4.3-4	
}			
}			
}			
}			

Table 6.5.3.4.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 6.5.3.4.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			

}			
}			
}			

Table 6.5.3.4.4.3-5: CellGroupConfig-SCell (Table 6.5.3.4.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 6.5.3.4.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 6.5.3.4.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
sCellState-r16	activated		
…			
}			
}			
}			

Table 6.5.3.4.4.3-6: ServingCellConfig-SpCell (Table 6.5.3.4.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 6.5.3.4.4.3-7: ServingCellConfig-SCell (Table 6.5.3.4.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

6.5.3.4.5 Test requirement

Tables 6.5.3.4.5-1 and 6.5.3.4.5-2 defines the primary level settings including test tolerances for all tests.

Table 6.5.3.4.5-1: NR Cell specific test parameters for NR PCell

Parameter		Unit	Cell 1	
			T1	T2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL		DLBWP.0.1	
	Initial UL		ULBWP.0.1	
	Dedicated DL		DLBWP.1.1	
	Dedicated UL		ULBWP.1.1	
TCI state			TCI.State.0	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS Configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
RMSI CORESET parameters	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
OCNG Pattern			OP.1	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration			SMTC.1	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2	slot	5	
	Config 3		10	
CSI reporting offset	Config 1,2	slot	3	
	Config 3		5	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	Config 1,2	dBm/SCS	-104+~~TT~~	
	Config 3		-101+~~TT~~	
$\hat{E}_s/I_{ot}$		dB	17+~~TT~~	
$\hat{E}_s/N_{oc}$		dB	17+~~TT~~	
SS-RSRP Note3	Config 1,2	dBm/SCS	-87+~~TT~~	
	Config 3		-84+~~TT~~	
Io Note3	Config 1,2	dBm/9.36 MHz	-59.0+~~TT~~	
	Config 3	dBm/38.16 MHz	-52.9+~~TT~~	
Propagation condition			AWGN	
Correlation Matrix and Antenna Configuration			1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP, SCH_RP, and Io levels have been derived from other parameters for information purpose. They are not settable parameters themselves.

Table 6.5.3.4.5-2: NR Cell specific test parameters for NR SCell

Parameter		Unit	Cell 2	
			T1	T2
Duplex mode	$Config_{SCell}$ 1		FDD	
	$Config_{SCell}$ 2,3		TDD	
TDD configuration	$Config_{SCell}$ 2		TDDConf.1.1	
	$Config_{SCell}$ 3		TDDConf.2.1	
$BW_{channel}$	$Config_{SCell}$ 1,2	MHz	10: $N_{RB,c}$ = 52	
	$Config_{SCell}$ 3		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL		N/A	DLBWP.0.1
	Initial UL			N/A
	Dedicated DL			DLBWP.1.1
	Dedicated UL			N/A
TCI state			N/A	TCI.State.0
CSI-RS configuration for CSI reporting	$Config_{SCell}$ 1		N/A	CSI-RS.1.1 FDD
	$Config_{SCell}$ 2			CSI-RS.1.1 TDD
	$Config_{SCell}$ 3			CSI-RS.2.1 TDD
TRS Configuration	$Config_{SCell}$ 1		N/A	TRS.1.1 FDD
	$Config_{SCell}$ 2			TRS.1.1 TDD
	$Config_{SCell}$ 3			TRS.1.2 TDD
PDSCH Reference measurement channel	$Config_{SCell}$ 1		N/A	SR.1.1 FDD
	$Config_{SCell}$ 2			SR.1.1 TDD
	$Config_{SCell}$ 3			SR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell}$ 1		N/A	CCR.1.1 FDD
	$Config_{SCell}$ 2			CCR.1.1 TDD
	$Config_{SCell}$ 3			CCR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell}$ 1		N/A	
	$Config_{SCell}$ 2			
	$Config_{SCell}$ 3			
OCNG Pattern			OP.1	
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1	
	$Config_{SCell}$ 3		SSB.2 FR1	
SMTC configuration			SMTC.1	
reportConfigType			N/A	
reportQuantity			N/A	
CSI reporting periodicity	$Config_{SCell}$ 1,2	slot	N/A	
	$Config_{SCell}$ 3		N/A	
CSI reporting offset	$Config_{SCell}$ 1,2	slot	N/A	
	$Config_{SCell}$ 3		N/A	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	$Config_{SCell}$ 1,2	dBm/SCS	-104+~~TT~~	
	$Config_{SCell}$ 3		-101+~~TT~~	
$\hat{E}_s/I_{ot}$		dB	17+~~TT~~	
$\hat{E}_s/N_{oc}$		dB	17+~~TT~~	

SS-RSRP Note3	$Config_{SCell}$ 1,2	dBm/SCS	-87+~~TT~~
	$Config_{SCell}$ 3		-84+~~TT~~
Io Note3	$Config_{SCell}$ 1,2	dBm/9.36 MHz	-59.0+~~TT~~
	$Config_{SCell}$ 3	dBm/38.16 MHz	-52.9+~~TT~~
Propagation condition			AWGN
Correlation Matrix and Antenna Configuration			1x2 Low
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP, SCH_RP, and Io levels have been derived from other parameters for information purpose. They are not settable parameters themselves.			

The UE shall complete the direct activation of the SCell no later than at slot $n + \frac{N_{direct}}{\text{NR slot length}}$.

The UE shall report non-zero CQI for SCell from slot $n + \frac{N_{direct}}{\text{NR slot length}}$ and onwards throughout time period T2.

The interruption on PCell during direct activation of the SCell shall occur within the interruption window specified in TS 38.133 [6] clause 8.3.4 and shall not exceed the length specified in TS 38.133 [6] clause 8.2.2.2.11.

The rate of correct events observed during repeated tests shall be at least 90%.

6.5.3.5 NR SA FR1 direct SCell activation at handover with known SCell

6.5.3.5.1 Test purpose

The purpose of this test is to verify the requirement for the FDD-FDD and TDD-TDD intra frequency handover with direct SCell activation requirements specified in is TS 38.133 [6] subclause 8.3.5.

6.5.3.5.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and supporting 2DL CA and direct SCell activation.

6.5.3.5.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.3.5.

6.5.3.5.4 Test description

6.5.3.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for NR PCell are shown in Table 6.5.3.5.4.1-1. Supported test configurations for NR SCell are shown in Table 6.5.3.5.4.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently.

Table 6.5.3.5.4.1-1: Intra-frequency handover with direct SCell activation from FR1-to-FR1 test configurations for NR PCell

Config	Description
1	Source PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode Target PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	Source PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode Target PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	Source PCell: NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode Target PCell: NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table 6.5.3.5.4.1-1A: Intra-frequency handover with direct SCell activation from FR1-to-FR1 test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Configure the test equipment and the DUT according to the parameters in Table 6.5.3.5.4.1-2 and Table 6.5.3.5.4.1-3.

Table 6.5.3.5.4.1-2: Initial conditions for known FR1 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.3.5.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.1	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

Table 6.5.3.5.4.1-3: General test parameters Intra-frequency handover with direct SCell activation from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	PCell		Cell 1	
	SCell		Cell 2	
	Target cell		Cell 3	
Final condition	PCell		Cell 3	
	SCell		Cell 2	
	neighbour cell		Cell 1	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
PRACH configuration index			FR1 PRACH configuration 1	As specified in Table 6.3.3.2-3 in TS 38.211 [6]
Time offset between cells			3 µs	Synchronous cells
T1		s	5	UE is in connected mode with PCell and SCell1 (cell 2) is in activated state. UE receives a handover command
T2		s	N_{direct}	UE shall accomplish the activation of the SCell
T3		s	1	
A3-offset		dB	-15	
T_{HARQ}		slot	k	k is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by *dl-DataToUL-ACK* if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [8]
$T_{CSI_Reporting}$		ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13]

k	ms	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS 38.213 [8]

1. Message contents are defined in clause 6.5.3.5.4.3.

2. There are three NR carriers, each with one cell. Cell 1 is NR FR1 PCell and Cell 2 is the SCell. Cell 1 and Cell 2 are configured according to Annex C.1.2 and C.1.3. Cell 3 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.

6.5.3.5.4.2 Test Procedure

This test is to verify the requirement for the FDD-FDD and TDD-TDD intra frequency handover with direct SCell activation requirements specified in TS 38.133 [6] subclause 8.3.5.

Supported test configurations for NR PCell are shown in table 6.5.3.5.4.1-1. Supported test configurations for NR SCell are shown in table 6.5.3.5.4.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently. Both handover with direct SCell activation requirements are tested by using the parameters in table 6.5.3.5.4.1-3, 6.5.3.5.5-1 and 6.5.3.5.5-2.

The test scenario comprises of two FR1 carriers and the 3 cells as given in tables 6.5.3.5.4.1-1 and 6.5.3.5.4.1-3. The test consists of three successive time periods, with time durations of T1, T2, and T3 respectively.

At the start of time duration T1, the UE is in connected mode with PCell and SCell1 (cell 2) is in activated state and UE is reporting CQI for both PCell and SCell1.

Time period T2 starts when UE receives a handover command to Cell 3 that also activates SCell1 (Cell2). This is done using an *RRCReconfiguration* message with parameter *sCellState* set to *activated* for the SCell1 (Cell 2). The message is sent from the test equipment to the UE and is received in a subframe # denoted m at the UE antenna connector. The UE shall accomplish the activation of the SCell no later than subframe ($m + N_{direct}$), where N_{direct} is the time for direct SCell activation at handover as defined in TS 38.133 [6] clause 8.3.5.

Time period T3 starts at ($m + N_{direct}$), at which point UE shall be reporting a valid CQI for both PCell and SCell1. The test equipment verifies the activation time by counting the slots between the RRC connection reconfiguration message is sent and until CSI report with non-zero CQI for both PCell and SCell is received. The test equipment verifies that interruptions on other serving cells are within the requirements by counting ACK/NACKs transmitted in PCell.

6. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message

7. Set the parameters according to T1 in Tables 6.5.3.5.4.1-3, 6.5.3.5.5-1, and 6.5.3.5.5-2. Propagation conditions are set according to Annex C clauses C.2.2..

8. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1 and provide measurement configurations.

3a. The UE sends a *MeasurementReport* message.

9. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

10. After having received a measurement report containing Cell 2, the SS activates SCC by sending a RRCReconfiguration message to the UE by which it configures the SCell (Cell 2) in activated state as defined in message contents table 6.5.3.5.4.3-5, and also implying handover to Cell 3.

6. The UE shall transmit the uplink PRACH channel to Cell 3 less than 62 ms from the beginning of time period T2. The UE shall start reporting CSI in PSCell in slot ($m+k+ 1+T_{interrupt} +T_{RRC_process}$), where $T_{RRC_process}$ is the RRC procedure delay defined in clause 12 of TS 38.331 [13], and Tx is the time to the end of the first complete the SSB burst as specified in TS 38.133 [6] clause 8.3.5. $T_{interrupt}$ is the interruption time during handover as specified in TS 38.133 [6] clause 6.1.1, T_2 is the delay from slot $n + \frac{T_{RRC_Process}+T_{interrupt}}{NR\ slot\ length}$ until UE has obtained a valid TA command for the target PCell and T_3 is the delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to k+1 slot, where k is defined in clause 4.2 in TS 38.213[8], UE shall report CQI index 0 (out-of-range) until the SCell activation has been completed, and the SS shall monitor CSI reports for SCell sent from the UE according to the following criteria:

- If the first CSI report for SCell is received by the SS no later than slot m + 1 + $\frac{\mathrm{T_{HARQ}}+T_{interrupt}+T_2+T_3+\mathrm{TRRC_process}+\mathrm{T_(CSI_Reporting)}}{NR\ slot\ length}$,

  - or slot $m+1+\frac{\mathrm{T_{HARQ}}+T_{interrupt}+T_2+T_3+\mathrm{T_(CSI_Reporting)}+\mathrm{TRRC_process}+T_X}{NR\ slot\ length}+N_{interruption}+1$ if the slot m + 1 + $\frac{\mathrm{T_{HARQ}}+T_{interrupt}+T_2+T_3+\mathrm{TRRC_process}+\mathrm{T_(CSI_Reporting)}}{NR\ slot\ length}$ was subject to interruption, where $N_{\mathrm{interruption}}$ is the interruption length given in TS 38.133 [6] clause 8.2.

- and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot m + $\frac{N_{\mathrm{direct}}}{\mathrm{NR\ slot\ length}}$,

  - or the next available uplink resource if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{N_{\mathrm{direct}}}{\mathrm{NR\ slot\ length}}$.

- and DTX is not observed by the SS outside the slot $m+1+\frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $m+1+\frac{\mathrm{TRRC_process}+T_2+T_3+T_{interrrupt}+T_{\mathrm{HARQ}}+T_X}{NR\ slot\ length}+N_{interruption}+\frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

- Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a failure was counted for the event "Activation" in step 6, the SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008), and Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. After the RRC connection release, the SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
   or
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until a test verdict has been achieved.

Each of the event “Activation” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

6.5.3.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL , with the following exceptions:

Table 6.5.3.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell; Table H.3.2-2 with Condition RBConfig_KeyChange

Table 6.5.3.5.4.3-2: *RRCReconfiguration*: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add

Information Element	Value/remark	Comment	Condition
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig	Table 6.5.3.5.4.3-2A	
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell	Table 6.5.3.5.4.3-5	
}			
}			
}			
}			

Table 6.5.3.5.4.3-2A: MeasConfig (Table 6.5.3.5.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 6.5.3.5.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 6.5.3.5.4.3-4	
}			
}			
}			
}			

Table 6.5.3.5.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 6.5.3.5.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			

a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 6.5.3.5.4.3-5: CellGroupConfig-SCell (Table 6.5.3.5.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 6.5.3.5.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 6.5.3.5.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
sCellState-r16	activated		
…			
}			
}			
}			

Table 6.5.3.5.4.3-6: ServingCellConfig-SpCell (Table 6.5.3.5.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 6.5.3.5.4.3-7: ServingCellConfig-SCell (Table 6.5.3.5.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

6.5.3.5.5 Test requirements

Table 6.5.3.5.5-1 and 6.5.3.5.5-2 defines the primary level settings including test tolerances for all tests.

Table 6.5.3.5.5-1: Cell specific test parameters for NR PCell for NR FR1-FR1 Intra frequency handover with direct SCell activation test case

Parameter		Unit	Cell 1			Cell 3		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR.2.1 TDD					
CORESET Reference Channel	Config 1		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR.2.1 TDD					
TRS configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OCNG pattern 1					
SMTC Configuration			SMTC pattern 1					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD					
	Config 2		CSI-RS.1.1 TDD					
	Config 3		CSI-RS.2.1 TDD					
reportConfigType			periodic					
reportQuantity			cri-RI-PMI-CQI					
CSI reporting periodicity	Config 1,2	slot	5					
	Config 3		10					
CSI reporting offset	Config 1,2	slot	3					
	Config 3		5					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								

EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1,2	dBm/SCS	-98					
	Config 3		-95					
$\hat{E}_s/I_{ot}$		dB	8	8	8	8	8	8
$\hat{E}_s/N_{oc}$		dB	8	8	8	8	8	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-90	-90	-90	-90
	Config 3	dBm/SCS	-87	-87	-87	-87	-87	-87
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.71	-58.71	-58.71	-58.71	-58.71	--58.71
	Config 3	dBm/ 38.16MHz	-52.60	-50.96	-50.96	-50.96	-50.96	-50.96
Propagation condition		-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.5.3.5.5-2: Cell specific test parameters for NR SCell for NR FR1-FR1 Intra frequency handover with direct SCell activation test case

Parameter		Unit	Cell 2		
			T1	T2	T3
NR RF Channel Number			2		
Duplex mode	$Config_{SCell}$ 1		FDD		
	$Config_{SCell}$ 2,3		TDD		
TDD configuration	$Config_{SCell}$ 1		Not Applicable		
	$Config_{SCell}$ 2		TDDConf.1.1		
	$Config_{SCell}$ 3		TDDConf.2.1		
$BW_{channel}$	$Config_{SCell}$ 1	MHz	10: $N_{RB,c}$ = 52		
	$Config_{SCell}$ 2		10: $N_{RB,c}$ = 52		
	$Config_{SCell}$ 3		40: $N_{RB,c}$ = 106		
BWP BW	$Config_{SCell}$ 1	MHz	10: $N_{RB,c}$ = 52		
	$Config_{SCell}$ 2		10: $N_{RB,c}$ = 52		
	$Config_{SCell}$ 3		40: $N_{RB,c}$ = 106		
DRx Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD		
	$Config_{SCell}$ 2		SR.1.1 TDD		
	$Config_{SCell}$ 3		SR.2.1 TDD		
CORESET Reference Channel	$Config_{SCell}$ 1		CR.1.1 FDD		
	$Config_{SCell}$ 2		CR.1.1 TDD		
	$Config_{SCell}$ 3		CR.2.1 TDD		
TRS configuration	$Config_{SCell}$ 1		TRS.1.1 FDD		
	$Config_{SCell}$ 2		TRS.1.1 TDD		
	$Config_{SCell}$ 3		TRS.1.2 TDD		
OCNG Patterns			OCNG pattern 1		
SMTC Configuration			SMTC pattern 1		

SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1		
	$Config_{SCell}$ 3		SSB.2 FR1		
PDSCH/PDCCH subcarrier spacing	$Config_{SCell}$ 1,2	kHz	15 kHz		
	$Config_{SCell}$ 3		30 kHz		
PUCCH/PUSCH subcarrier spacing	$Config_{SCell}$ 1,2	kHz	15 kHz		
	$Config_{SCell}$ 3		30 kHz		
PRACH configuration			FR1 PRACH configuration 1		
BWP configuration	Initial DL BWP		DLBWP.0.1		
	Dedicated DL BWP		DLBWP.1.1		
	Initial UL BWP		ULBWP.0.1		
	Dedicated UL BWP		ULBWP.1.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15kHz	-98		
N_{oc} Note2	$Config_{SCell}$ 1,2	dBm/SCS	-98		
	$Config_{SCell}$ 3		-95		
$\hat{E}_s / I_{ot}$		dB	8	8	8
$\hat{E}_s / N_{oc}$		dB	8	8	8
SSB_RP	$Config_{SCell}$ 1,2	dBm/SCS	-90	-90	-90
	$Config_{SCell}$ 3	dBm/SCS	-87	-87	-87
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	-61.41	-61.41	-61.41
	$Config_{SCell}$ 3	dBm/ 38.16MHz	-55.31	-55.31	-55.31
Propagation condition		-	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall be capable to transmit valid CSI report for the directly activated SCell1 no later than in subframe $m+N_{direct}$. The rate of correct observed SCell1 direct activation delay during repeated tests shall be at least 90%.

NOTE: The SCell activation delay, N_{direct}, can be expressed as: $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{activation_time} + T_{CSI_Reporting}$ - 3ms, where:

$T_{RRC_Process}$: RRC procedure delay defined in clause 12 of TS 38.331 [13],

$T_{interrupt}$: Interruption time during handover as specified in TS 38.133 [6] clause 6.1.1,

T_2: Delay from slot $m + \frac{T_{RRC_Process}+T_{interrupt}}{\text{NR slot length}}$ until UE has obtained a valid TA command for the target PCell,

T_3: Delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to k+1 slot, where k is defined in clause 4.2 in TS 38.213[8],

$T_{activation_time}$ and $T_{CSI_Reporting}$ are specified in TS 38.133 [6] clause 8.3.2, where the following definitions of $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$ as defined in TS 38.133 [6] section 8.3.5 shall apply:

- $T_{FirstSSB}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot m + $(T_{RRC_Process}+T_{interrupt}+T_2+T_3)/(NR\ slot\ length)$

- $T_{FirstSSB_MAX}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot m + $(T_{RRCProcess}+T_{interrupt}+T2+T3)/(NR\ slot\ length)$

This gives a total of N_{direct} = 10 + 52 + T_{IU} + T_2 + T_3 + $T_{activation_time}$ + $T_{CSI_Reporting}$ - 3 ms = 62 + 10 + 13 + 6 + 20 + 2 - 3 = 94 ms for test configurations 1 and 2.

This gives a total of N_{direct} = 10 + 52 + T_{IU} + T_2 + T_3 + $T_{activation_time}$ + $T_{CSI_Reporting}$ - 3 ms = 62 + 10 + 13 + 6 + 20 + 2 - 3 = 94 ms for test configuration 3.

During T3 the UE shall send valid CSI reports for PCell and SCell1 with non-zero CQI index and continue to send CSI reports for PCell and SCell1 (Cell 2) with non-zero CQI index until the end of T3.

All the above test requirements shall be fulfilled for the observed SCell1 direct activation delay to be counted as correct.

6.5.3.6 to 6.5.3.9

6.5.3.10 NR SA FR1 fast SCell Activation of known SCell in non-DRX for 160ms SCell measurement cycle

6.5.3.10.1 Test purpose

The purpose of this test is to verify that the fast SCell activation times are within the requirements stated in TS 38.133 [6] clause 8.3.16, when the SCell in FR1 is known by the UE at the time of activation.

6.5.3.10.2 Test applicability

This test applies to all types of NR UE from Release 17 onwards and supporting 2DL CA in NR and fast SCell activation.

6.5.3.10.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.16.

6.5.3.10.4 Test description

6.5.3.10.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for NR PCell and NR SCell are shown in Table 6.5.3.10.4.1-1.

Table 6.5.3.10.4.1-1: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 6.5.3.10.4.1-2 and Table 6.5.3.10.4.1-3.

Table 6.5.3.10.4.1-2: Initial conditions for fast known FR1 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.3.10.5-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
	TE Part	A.3.1.7.1	Connection Diagram

Connection Diagram	DUT Part	A.3.2.3.1	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

Table 6.5.3.10.4.1-3: General test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
A3-offset	dB	-15	
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [8] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13]

1.Message contents are defined in clause 6.5.3.10.4.3.

2.There are two NR carriers, each with one cell. Cell 1 is NR FR1 PCell and Cell 2 is the SCell. Cell 1 and Cell 2 are configured according to Annex C.1.2 and C.1.3.

6.5.3.10.4.2 Test procedure

The test consists of two successive time periods, with duration of T1and T2, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the SCell and triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n (where n mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot n + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in TS 38.133 [6] clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $n + \frac{T_{\text{HARQ}}+3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_X}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in TS 38.133 [6] clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in TS 38.133 [6] clause 8.2.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation of SCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 6.5.3.10.4.1-3 and 6.5.3.10.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1 and provide measurement configurations.

3a. The UE sends a *MeasurementReport* message.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.55) in a slot # denoted n and T2 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 7.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot $s_{first_CSI} = \text{n} + 1 + \frac{\text{T}_{\text{HARQ}}+3\text{ms}+T_{\text{CSI_Reporting}}}{NR\ slot\ length}$,

     - or slot $s^{int}_{first_CSI} = n + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting}+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot s_{first_CSI} was subject to interruption,

     - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI} = \text{n} + \frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, where $\text{T}_{\text{activation_time}} = \text{T}_{\text{FirstATRS}} + 5\text{ms}$, as defined in TS 38.133 [6] clause 8.3.16,

     - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

     - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if slot $s_{nonzero_CQI}$ was subject to interruption,

   - and DTX is not observed by the SS outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

- Then the number of successes for the event “Activation” is increased by one. Otherwise, count a fail for the event “Activation” and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event “Activation” in step 6, the SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. After the RRC connection release, the SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
   or
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until a test verdict has been achieved.

The event "Activation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

6.5.3.10.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 6.5.3.10.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell

Table 6.5.3.10.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell	Table 6.5.3.10.4.3-5	
measConfig	MeasConfig	Table 6.5.3.10.4.3-2A	
}			
}			
}			

Table 6.5.3.10.4.3-2A: MeasConfig (Table 6.5.3.10.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 6.5.3.10.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		

ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 6.5.3.10.4.3-4	
}			
}			
}			
}			

Table 6.5.3.10.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 6.5.3.10.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 6.5.3.10.4.3-5: CellGroupConfig-SCell (Table 6.5.3.10.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 6.5.3.10.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 6.5.3.10.4.3-7	

smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
…			
}			
}			
}			

Table 6.5.3.10.4.3-6: ServingCellConfig-SpCell (Table 6.5.3.10.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 6.5.3.10.4.3-7: ServingCellConfig-SCell (Table 6.5.3.10.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6 with condition FastActivation_SCell		
servingCellMO	2		
}			

6.5.3.10.5 Test requirement

Table 6.5.3.10.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.5.3.10.5-1: Cell specific test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2	MHz	Note 7			
	Config 3		Note 7			
$BW_{occupied}$	Config 1,2	RB	52 Note 5			
	Config 3		106 Note 6			
Initial BWP configuration			DLBWP.0.2			
TCI state			TCI.State.0			
TRS Configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		-	
	Config 2		SR.1.1 TDD		-	
	Config 3		SR.2.1 TDD		-	
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD		-	
	Config 2		CCR.1.1 TDD		-	
	Config 3		CCR.2.1 TDD		-	
	Config 1		CR.1.1 FDD		-	

RMSI CORESET parameters	Config 2		CR.1.1 TDD	-
	Config 3		CR.2.1 TDD	-
OCNG Patterns	Config 1,2		OP.1 Note 5	
	Config 3,		OP.1 Note 6	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
Aperiodic CSI-RS for Scell activation	Config 1		N/A	TRS.1.3 FDD
	Config 2		N/A	TRS.1.3 TDD
	Config 3		N/A	TRS.1.4 TDD
gapBetweenBursts		slots	N/A	
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
SMTC configuration			SMTC.1	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity for PCell	Config 1,2	slot	5	-
	Config 3		10	-
CSI reporting offset for PCell	Config 1,2	slot	3	-
	Config 3		5	-
CSI reporting periodicity for SCell	Config 1,2	slot	5	N/A
	Config 3		10	N/A
CSI reporting offset for SCell	Config 1,2	slot	2	N/A
	Config 3		4	N/A
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	Config 1,2	dBm/SCS	-104	
	Config 3		-101	
$\hat{E}_s/I_{ot}$		dB	17	
$\hat{E}_s/N_{oc}$		dB	17	
SS-RSRP Note3	Config 1,2	dBm/SCS	-87	NA
	Config 3		-84	NA
CSI-RSRP Note3	Config 1,2	dBm/SCS	NA	-87
	Config 3		NA	-84
SCH_RP Note 3		dBm/15 kHz	-87	
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96	
	Config 3	dBm/ 38.16MHz	-52.87	
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: SS-RSRP, CSI-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 7:	$N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1 with configured $BW_{channel}$.
Note 8:	On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $(n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length})$. UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS} + 5ms$, as defined in TS 38.133 [6] clause 8.3.16.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS} + 5ms$, as defined in TS 38.133 [6] clause 8.3.16.

During T2 interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, as defined in TS 38.133 [6] clause 8.3.16.

The interruption on any activated serving cell shall not be more than the values specified for SA in TS 38.133 [6] clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in TS 38.133 [6] clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

6.5.3.11 NR SA FR1 fast SCell Activation of known SCell in non-DRX for 640ms SCell measurement cycle

6.5.3.11.1 Test purpose

The purpose of this test is to verify that the fast SCell activation times are within the requirements stated in TS 38.133 [6] clause 8.3.16, when the SCell in FR1 is known by the UE at the time of activation.

6.5.3.11.2 Test applicability

This test applies to all types of NR UE from Release 17 onwards and supporting 2DL CA in NR and fast SCell activation.

6.5.3.11.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.16.

6.5.3.11.4 Test description

6.5.3.11.4.1 Initial conditions

Same initial conditions as described in section 6.5.3.10.4.1 with following exception:

The listed parameter values in Tables 6.5.3.11.4.1-1 will replace the values of corresponding parameters in Tables 6.5.3.10.4.1-3. The listed parameter values in Tables 6.5.3.11.4.1-2 will replace the values of corresponding parameters in Tables 6.5.3.10.5-1.

Table 6.5.3.11.4.1-1: General test parameters for known FR1 SCell activation case, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment

SCell measurement cycle (measCycleSCell)	ms	640	

Table 6.5.3.11.4.1-2: Cell specific test parameters for known FR1 SCell activation case, 640ms SCell measurement cycle

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
gapBetweenBursts		slots	2			

6.5.3.11.4.2 Test procedure

Same test procedure as described in section 6.5.3.10.4.2:

6.5.3.11.4.3 Message contents

Same message contents as described in section 6.5.3.10.4.3 with following exception:

- Table 6.5.3.10.4.3-3 is replaced by Table 6.5.3.11.4.3-1.

Table 6.5.3.11.4.3-1: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf640		
}			

Table 6.5.3.11.4.3-2: SCellActivationRS-Config

Derivation Path: TS 38.508-1 [14], Table 7.3.1-6A			
Information Element	**Value/remark**	**Comment**	**Condition**
SCellActivationRS-Config-r17 ::= SEQUENCE {			
gapBetweenBursts-r17	2		
}			

6.5.3.11.5 Test requirement

Table 6.5.3.10.5-1 defines the primary level settings including test tolerances for all tests except the listed parameter values in Tables 6.5.3.11.5-1 will replace the values of corresponding parameters in Table 6.5.3.10.5-1.

Table 6.5.3.11.5-1: Cell specific test parameters for known FR1 Scell activation case, 640ms Scell measurement cycle

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2	MHz	Note 7			
	Config 3		Note 7			
$BW_{occupied}$	Config 1,2	RB	52 Note 5			
	Config 3		106 Note 6			
Initial BWP configuration			DLBWP.0.2			
TCI state			TCI.State.0			
TRS Configuration	Config 1		TRS.1.1 FDD			

	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-
	Config 2		SR.1.1 TDD	-
	Config 3		SR.2.1 TDD	-
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD	-
	Config 3		CCR.2.1 TDD	-
RMSI CORESET parameters	Config 1		CR.1.1 FDD	-
	Config 2		CR.1.1 TDD	-
	Config 3		CR.2.1 TDD	-
OCNG Patterns	Config 1,2		OP.1 Note 5	
	Config 3,		OP.1 Note 6	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
Aperiodic CSI-RS for Scell activation	Config 1		N/A	TRS.1.3 FDD
	Config 2		N/A	TRS.1.3 TDD
	Config 3		N/A	TRS.1.4 TDD
gapBetweenBursts		slots	2	
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
SMTC configuration			SMTC.1	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity for PCell	Config 1,2	slot	5	-
	Config 3		10	-
CSI reporting offset for PCell	Config 1,2	slot	3	-
	Config 3		5	-
CSI reporting periodicity for SCell	Config 1,2	slot	5	N/A
	Config 3		10	N/A
CSI reporting offset for SCell	Config 1,2	slot	2	N/A
	Config 3		4	N/A
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	Config 1,2	dBm/SCS	-104	
	Config 3		-101	
$\hat{E}_s/I_{ot}$		dB	17	
$\hat{E}_s/N_{oc}$		dB	17	
SS-RSRP Note3	Config 1,2	dBm/SCS	-87	
	Config 3		-84	
CSI-RSRP Note3	Config 1,2	dBm/SCS		-87
	Config 3			-84
SCH_RP Note 3		dBm/15 kHz	-87	
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96	
	Config 3	dBm/ 38.16MHz	-52.87	
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3:	SS-RSRP, CSI-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7:	$N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8:	On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $(n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length})$. UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption.During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS} + T_{gap} + T_{ATRS}$+ 5ms, as defined in clause 8.3.16.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS}$ + 5ms, as defined in clause 8.3.16.

During T2 interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, as defined in clause 8.3.16.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

6.5.3.12 to 6.5.3.14

6.5.3.15 NR SA FR1 TRS based SCell Activation of SSB-less SCell in inter-band CA in non-DRX

Editor's note: This test case is incomplete. The following aspect is either missing or TBD:

- Some parameters are defined in brackets
- Test tolerance analysis and measurement uncertainty are missing

6.5.3.15.1 Test purpose

The purpose of this test is to verify that the SSB-less SCell activation delay is within the requirements stated in TS 38.133 [6] clause 8.3.2, when the to be activated SCell in FR1 is provided with periodic CSI-RS for tracking instead of SSB. SCell does not provide neither SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration.

6.5.3.15.2 Test applicability

This test applies to all types of NR UE release 18 onwards that support *scellWithoutSSB-InterBandCA-r18*.

6.5.3.15.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clauses 8.3.2 and 8.2.2.2.

6.5.3.15.4 Test description

6.5.3.15.4.1 Initial conditions

The supported test configurations are shown in Table 6.5.3.15.4.1-1 and 6.5.3.15.4.1-2 below.

Table 6.5.3.15.4.1-1: FR1 inter-band SSB-less SCell activation based on TRS for NR PCell in non-DRX for 160ms SCell measurement cycle supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table 6.5.3.15.4.1-2: FR1 inter-band SSB-less SCell activation based on TRS for NR SCell in non-DRX for 160ms SCell measurement cycle supported test configurations

Config	Description
1	NR 15 kHz SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 6.5.3.15.4.1-3.

Table 6.5.3.15.4.1-3: Initial conditions for TRS based SCell Activation of SSB-less SCell in FR1 inter-band CA in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7A.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part. - Without Faders		

1. The general test parameter settings are set up according to Table 6.5.3.15.4.1-4.

2. Message contents are defined in clause 6.5.3.15.4.3.

3. The test scenario comprises of two NR carriers, each with one cell. Both cells have constant signal levels throughout the test and are configured according to Annex E.4.

Table 6.5.3.15.4.1-4: General test parameters for TRS based SCell activation of SSB-less SCell in FR1 inter-band CA in non-DRX for 160ms SCell measurement cycle

Parameter	Unit	Value	Comment

RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test, where NR radio channels 1 and 2 are in different NR bands.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
Cell2 timing offset to cell1	µs	Length of CP of Cell 2	
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

6.5.3.15.4.2 Test procedure

The test consists of two successive time periods, with duration of T1 and T2, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) but is not aware of Cell 2 (SCell). Cell 1 and Cell 2 are in different bands. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. At the same time, UE also receives the indication of reference serving cell in the same RRC message. The Cell 1 is indicated as the reference cell of Cell 2. The test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n (where n mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot n + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $n + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$, as defined in clause 8.3, where $N_{\mathrm{interruption}}$ is the interruption length given in clause 8.2.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation of SCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2,. Set the parameters according to T1 in Tables 6.5.3.15.4.1-1 and 6.5.3.15.5**-**1. Propagation conditions are set according to Annex C clauses C.2.2.

3,. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1, with the message content exceptions defined in clause 6.5.3.15.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n (where n mode 20=1) and T2 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 7.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell according to the following criteria:

- If the first CSI report for SCell is received by the SS no later than slot s_{first_CSI} = n + 1 + $\frac{\mathrm{T_{HARQ}+3ms+}T_{CSI_Reporting}}{NR\ slot\ length}$

  - or slot $s^{int}_{first_CSI} = n + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting}+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot s_{first_CSI} was subject to interruption,

  - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

- - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI}$ = n + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$, where $\mathrm{T_{activation_time}} = \mathrm{T_{First_TRS}} + \mathrm{T_{TRS}}$ + 5ms, as defined in TS 38.133 [6] clause 8.3.2,

  - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

  - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if $s_{nonzero_CQI}$ was subject to interruption,

- and DTX is not observed by the SS outside the slot $n + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

- Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 6, the SS shall transmit an RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Switch off and on the UE and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 3-9 until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

6.5.3.15.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 6.5.3.15.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell

Table 6.5.3.15.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell	Table 6.5.3.15.4.3-5	
}			
}			
}			

Table 6.5.3.15.4.3-5: CellGroupConfig-SCell (Table 6.5.3.15.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 6.5.3.15.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 6.5.3.15.4.3-7	
}			
}			
}			

Table 6.5.3.15.4.3-6: ServingCellConfig-SpCell (Table 6.5.3.15.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

6.5.3.15.5 Test requirement

Table 6.5.3.15.5-1 and Table 6.5.3.15.5-2 define the primary level settings including test tolerances for TRS based SCell Activation of SSB-less SCell in FR1 inter-band CA in non-DRX.

Table 6.5.3.15.5-1: PCell test configuration parameters for TRS based SCell activation of SSB-less SCell in FR1 inter-band CA in non-DRX for 160 ms measurement cycle

Parameter		Unit	Cell 1	
			T1	T2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1,2	MHz	Note 7	
	Config 3		Note 7	
$BW_{occupied}$	Config 1,2	RB	52 Note 5	
	Config 3		106 Note 6	
Initial BWP configuration			DLBWP.0.1	
TCI state			TCI.State.0	
TRS Configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
RMSI CORESET parameters	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
OCNG Patterns	Config 1,2		OP.1 Note 5	
	Config 3,		OP.1 Note 6	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
Periodic CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
SMTC configuration			SMTC.1	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2	slot	5	
	Config 3		10	
CSI reporting offset	Config 1,2	slot	3	
	Config 3		5	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2	Config 1,2	dBm/SCS	-104	
	Config 3		-101	
$\hat{E}_s/I_{ot}$		dB	10+TT	
$\hat{E}_s/N_{oc}$		dB	10+TT	
SS-RSRP Note3	Config 1,2	dBm/SCS	-94+TT	
	Config 3		-91+TT	
SCH_RP Note 3		dBm/15 kHz	-91+TT	
Io Note3	Config 1,2	dBm/ 9.36MHz	-65.63+TT	
	Config 3	dBm/ 38.16MHz	-59.54+TT	

Propagation condition	-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$. Note 3: Io, SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2. Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured. Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured. Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$. Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.		

Table 6.5.3.15.5-2: SCell test configuration parameters for TRS based SCell activation of SSB-less SCell in FR1 inter-band CA in non-DRX for 160 ms measurement cycle

Parameter		Unit	Cell 2	
			T1	T2
Duplex mode	$Config_{SCell}$ 1		FDD	
	$Config_{SCell}$ 2,3		TDD	
TDD configuration	$Config_{SCell}$ 1		Not applicable	
	$Config_{SCell}$ 2		TDDConf.1.1	
	$Config_{SCell}$ 3		TDDConf.2.1	
referenceCell	$Config_{SCell}$ 1,2,3		Cell 1	
$BW_{channel}$	$Config_{SCell}$ 1,2	MHz	Note 7	
	$Config_{SCell}$ 3		Note 7	
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 5	
	$Config_{SCell}$ 3		106 Note 6	
Initial BWP configuration			DLBWP.0.1	
TCI state			TCI.State.0 Note 9	
TRS Configuration	$Config_{SCell}$ 1		TRS.1.1 FDD	
	$Config_{SCell}$ 2		TRS.1.1 TDD	
	$Config_{SCell}$ 3		TRS.1.2 TDD	
PDSCH Reference measurement channel	$Config_{SCell}$ 1		-	
	$Config_{SCell}$ 2		-	
	$Config_{SCell}$ 3		-	
Dedicated CORESET parameters	$Config_{SCell}$ 1		-	
	$Config_{SCell}$ 2		-	
	$Config_{SCell}$ 3		-	
RMSI CORESET parameters	$Config_{SCell}$ 1		-	
	$Config_{SCell}$ 2		-	
	$Config_{SCell}$ 3		-	
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 5	
	$Config_{SCell}$ 3		OP.1 Note 6	
SSB Configuration	$Config_{SCell}$ 1,2,3		Not provided	
Periodic CSI-RS configuration for CSI reporting (Note 8)	$Config_{SCell}$ 1		CSI-RS.1.1 FDD	
	$Config_{SCell}$ 2		CSI-RS.1.1 TDD	
	$Config_{SCell}$ 3		CSI-RS.2.1 TDD	
SMTC configuration			Not provided	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity	$Config_{SCell}$ 1,2	slot	-	
	$Config_{SCell}$ 3		-	
CSI reporting offset	$Config_{SCell}$ 1,2	slot	-	
	$Config_{SCell}$ 3		-	
EPRE ratio of PSS to SSS		dB	N/A	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2	Config 1,2	dBm/SCS	-104
	Config 3		-101
$\hat{E}_s/I_{ot}$		dB	19 + [Δ_{EPRE} Note 10]
$\hat{E}_s/N_{oc}$		dB	19 + [Δ_{EPRE} Note 10]
SS-RSRP Note3	Config 1,2	dBm/SCS	-
	Config 3		-
SCH_RP Note 3		dBm/15 kHz	N/A
Io Note3	Config 1,2	dBm/ 9.36MHz	Note 3
	Config 3	dBm/ 38.16MHz	Note 3
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

Note 3: Io, SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.

Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.

Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

Note 9: The SSB in referenceSignal in the TCI state is configured as the SSB in Cell 1.

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot ($n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{first_TRS} + T_{TRS} + 5$ ms, as defined in 6.5.3.0.2.

During T2 interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, as defined in TS 38.133 [6] clause 8.3.2.

The interruption on any activated serving cell shall not be more than the values specified as defined in Table 6.5.3.0.2-1 and Table 6.5.3.0.2-2.

All the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in TS 38.133 [6] clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

6.5.3.16 NR SA FR1 Inter-band SSB-less SCell Activation based on A-TRS in non-DRX

6.5.3.16.1 Test purpose

The purpose of this test is to verify that the inter-band SSB-less SCell activation times are within the requirements stated in TS 38.133 [6] clause 8.3.2.

6.5.3.16.2 Test applicability

This test applies to all types of NR UE release 17 onwards and supports *scellWithoutSSB-InterBandCA-r18 and aperiodicCSI-RS-FastScellActivation-r17.*

6.5.3.16.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clauses 8.3.2 and 8.2.2.2.

6.5.3.16.4 Test description

6.5.3.16.4.1 Initial conditions

The supported test configuration is listed in Table 6.5.3.16.4-1 and 6.5.3.16.4-.

Table 6.5.3.16.4.1-1: Inter-band SSB-less SCell Activation based on A-TRS for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table 6.5.3.16.4.1-2: Inter-band SSB-less SCell Activation based on A-TRS for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 6.5.3.16.4.1-3.

Table 6.5.3.16.4.1-3: Initial conditions for Inter-band SSB-less SCell Activation based on A-TRS

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7A.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	NA		

1. The general test parameter settings are set up according to Table 6.5.3.16.4.1-4.

2. Message contents are defined in clause 6.5.3.16.4.3.

3. The test scenario comprises of two NR Cells. (Cell 1 and Cell 2). Cell 1 and Cell 2 are configured according to Annex E.4.

Table 6.5.3.16.4.1-4: General test parameters for Inter-band SSB-less SCell Activation based on A-TRS

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test, where NR radio channel 1 and 2 are in different NR bands.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell2 timing offset to cell1	µs	Length of CP of Cell 2	
T1	s	7	During this time the PCell shall be known and the SCell configured
T2	s	1	During this time the UE shall activate the SCell.
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	k_1×NR slot length k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [8] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13]

6.5.3.16.4.2 Test procedure

The test consists of two successive time periods, with duration of T1 and T2, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to PCell Cell 1, but is not aware of Cell 2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. At the same time, UE also receives the indication of reference serving cell in the same RRC message. The Cell 1 is indicated as the reference cell of Cell 2. The test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n (where n mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot n + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $n + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$, as defined in clause 8.3, where $N_{\mathrm{interruption}}$ is the interruption length given in clause 8.2.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation of SCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 6.5.3.15.4.1-1 and 6.5.3.15.5**-**1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1, with the message content exceptions defined in clause 6.5.3.15.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n (where n mode 20=1) and T2 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 7.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell according to the following criteria:

- If the first CSI report for SCell is received by the SS no later than slot s_{first_CSI} = n + 1 + $\frac{\mathrm{T_{HARQ}+3ms+}T_{CSI_Reporting}}{NR\ slot\ length}$

  - or slot $s_{first_CSI}^{int} = n + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting}+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot s_{first_CSI} was subject to interruption,

  - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s_{first_CSI}^{int}$,

- and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI}$ = n + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$, where $\mathrm{T_{activation_time}} = \mathrm{T_{First_ATRS}} + \mathrm{T_{gap}} + \mathrm{T_{ATRS}}$ + 5ms, as defined in TS 38.133 [6] clause 8.3.16,

  - or slot $s_{nonzero_CQI}^{int} = max\left(s_{first_CSI}^{int}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

  - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s_{nonzero_CQI}^{int}$ if $s_{nonzero_CQI}$ was subject to interruption,

- and DTX is not observed by the SS outside the slot $n + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

  - Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 6, the SS shall transmit an RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Switch off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 3-9 until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

6.5.3.16.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 6.5.3.16.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell

Table 6.5.3.16.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig-SCell	Table 6.5.3.16.4.3-5	
}			
}			
}			

Table 6.5.3.16.4.3-5: CellGroupConfig-SCell (Table 6.5.3.16.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 6.5.3.16.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 6.5.3.16.4.3-7	
}			
}			
}			

Table 6.5.3.16.4.3-6: ServingCellConfig-SpCell (Table 6.5.3.16.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 6.5.3.16.4.3-7: ServingCellConfig-SCell (Table 6.5.3.16.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6 with condition FastActivation_SCell		
servingCellMO	2		

6.5.3.16.5 Test requirement

Table 6.5.3.16.5-1 and 6.5.3.16.5-2 define the primary level settings including test tolerances for the test.

Table 6.5.3.16.5-1: PCell test parameters for Inter-band SSB-less SCell Activation based on A-TRS

Parameter		**Unit**	**Cell 1**	
			T1	**T2**
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1,2	MHz	Note 7	
	Config 3		Note 7	
$BW_{occupied}$	Config 1,2	RB	52 Note 5	
	Config 3		106 Note 6	
Initial BWP configuration			DLBWP.0.1	
TCI state			TCI.State.0	
TRS Configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
RMSI CORESET parameters	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
OCNG Patterns	Config 1,2		OP.1 Note 5	
	Config 3,		OP.1 Note 6	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
SMTC configuration			SMTC.1	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2	slot	5	
	Config 3		10	
CSI reporting offset	Config 1,2	slot	3	
	Config 3		5	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				

EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2	Config 1,2	dBm/SCS	-104
	Config 3		-101
$\hat{E}_s / I_{ot}$		dB	10
$\hat{E}_s / N_{oc}$		dB	10
SS-RSRP Note3	Config 1,2	dBm/SCS	-94
	Config 3		-91
SCH_RP Note 3		dBm/15 kHz	-91
Io Note3	Config 1,2	dBm/ 9.36MHz	-65.63
	Config 3	dBm/ 38.16MHz	-59.54
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: Io, SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

Table 6.5.3.16.5-2: SCell parameters for Inter-band SSB-less SCell Activation based on A-TRS

Parameter		Unit	Cell 2	
			T1	T2
Duplex mode	$Config_{SCell}$ 1		FDD	
	$Config_{SCell}$ 2,3		TDD	
TDD configuration	$Config_{SCell}$ 1		Not applicable	
	$Config_{SCell}$ 2		TDDConf.1.1	
	$Config_{SCell}$ 3		TDDConf.2.1	
referenceCell	$Config_{SCell}$ 1,2,3		Cell 1	
$BW_{channel}$	$Config_{SCell}$ 1,2	MHz	Note 7	
	$Config_{SCell}$ 3		Note 7	
$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 5	
	$Config_{SCell}$ 3		106 Note 6	
Initial BWP configuration			DLBWP.0.1	
TCI state			TCI.State.0 Note 9	
TRS Configuration	$Config_{SCell}$ 1		TRS.1.1 FDD	
	$Config_{SCell}$ 2		TRS.1.1 TDD	
	$Config_{SCell}$ 3		TRS.1.2 TDD	
PDSCH Reference measurement channel	$Config_{SCell}$ 1		-	
	$Config_{SCell}$ 2		-	
	$Config_{SCell}$ 3		-	
Dedicated CORESET parameters	$Config_{SCell}$ 1		-	
	$Config_{SCell}$ 2		-	
	$Config_{SCell}$ 3		-	
RMSI CORESET parameters	$Config_{SCell}$ 1		-	
	$Config_{SCell}$ 2		-	
	$Config_{SCell}$ 3		-	
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 5	
	$Config_{SCell}$ 3		OP.1 Note 6	
SSB Configuration	$Config_{SCell}$ 1,2,3		Not provided	
Aperiodic CSI-RS for Scell activation	$Config_{SCell}$ 1		TRS.1.3 FDD	
	$Config_{SCell}$ 2		TRS.1.3 TDD	

	Config$_{SCell}$ 3		TRS.1.4 TDD
gapBetweenBursts	Config$_{SCell}$ 1,2	slot	2
	Config$_{SCell}$ 3	slot	3
CSI-RS configuration for CSI reporting (Note 8)	Config$_{SCell}$ 1		CSI-RS.1.1 FDD
	Config$_{SCell}$ 2		CSI-RS.1.1 TDD
	Config$_{SCell}$ 3		CSI-RS.2.1 TDD
SMTC configuration			Not provided
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity	Config$_{SCell}$ 1,2	slot	-
	Config$_{SCell}$ 3		-
CSI reporting offset	Config$_{SCell}$ 1,2	slot	-
	Config$_{SCell}$ 3		-
EPRE ratio of PSS to SSS		dB	N/A
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2	Config 1,2	dBm/SCS	-104
	Config 3		-101
$\hat{E}_s/I_{ot}$		dB	18
$\hat{E}_s/N_{oc}$		dB	18
SS-RSRP Note3	Config 1,2	dBm/SCS	-
	Config 3		-
SCH_RP Note 3		dBm/15 kHz	N/A
Io Note3	Config 1,2	dBm/ 9.36MHz	N/A
	Config 3	dBm/ 38.16MHz	N/A
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: Io, SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.
Note 9: The SSB in referenceSignal in the TCI state is configured as the SSB in Cell 1.

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot ($n + 1 + \frac{T_{HARQ}+3\,ms}{NR\ slot\ length}$). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{first_ATRS} + T_{gap} + T_{ATRS} + 5$ ms, as defined in clause 6.5.3.0.2.

During T2 interruption of PCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in TS 38.133 [6] clause 8.3.2.

The interruption on any activated serving cell shall not be more than the values specified for SA in Table 6.5.3.0.2-1 and Table 6.5.3.0.2-2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{\text{HARQ}}+T_{\text{activtion_time}}+T_{\text{CSI_Reporting}}}{NR\ slot\ length}$ as defined in TS 38.133 [6] clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

The rate of successful tests during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.4 UE UL carrier RRC reconfiguration delay

6.5.4.0 Minimum conformance requirements

6.5.4.0.1 Minimum conformance requirements for UL carrier RRC reconfiguration delay

[TS 38.133, clause 8.4.2]

When the UE receives a RRC message implying NR UL or Supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within $T_{UL_carrier_config}$ from the end of the last slot containing the RRC command.

$T_{UL_carrier_config}$ equals the maximum RRC procedure delay defined in clause x.y in TS 38.331 [2] plus the interruption time specified in TS 38.133 [6] section 8.2.1.2.6.

[TS 38.133, clause 8.4.3]

When the UE receives a RRC message implying NR UL or Supplementary UL carrier deconfiguration RRC signalling, the UE shall stop UL signalling on the deconfigured UL carrier within $T_{UL_carrier_deconfig}$ from the end of the last slot containing the RRC command.

$T_{UL_carrier_deconfig}$ equals the maximum RRC procedure delay defined in clause x.y in TS 38.331 [2].

The normative reference for this requirement is TS 38.133 [6] clause 8.4.

6.5.4.1 NR SA FR1 UE UL carrier RRC reconfiguration delay

6.5.4.1.1 Test purpose

To verify that when the UE receives a RRC message implying NR UL or Supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within the time limits specified in TS 38.133 [6] section 8.4.2 and 8.4.3 for configuring and deconfiguring, respectively.

6.5.4.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting SUL.

6.5.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.4.1.

6.5.4.1.4 Test description

6.5.4.1.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 6.5.4.1.4.1-1.

Table 6.5.4.1.4.1-1: Supported test configurations

Configuration	PSCell (Cell 1)	SCell (Cell 2)
6.5.4.1-1	15 kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥10MHz bandwidth, SUL duplex mode
6.5.4.1-2	15 kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥10MHz bandwidth, SUL duplex mode
6.5.4.1-3	15 kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40MHz bandwidth, SUL duplex mode
6.5.4.1-4	15 kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥10MHz bandwidth, SUL duplex mode
6.5.4.1-5	15 kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥10MHz bandwidth, SUL duplex mode
6.5.4.1-6	15 kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40MHz bandwidth, SUL duplex mode
6.5.4.1-7	30 kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥10MHz bandwidth, SUL duplex mode
6.5.4.1-8	30 kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥10MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥10MHz bandwidth, SUL duplex mode
6.5.4.1-9	30 kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥40MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥40MHz bandwidth, SUL duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.		

Configure the test requirement and the DUT according to the parameters in Table 6.5.4.1.4.1-2.

Table 6.5.4.1.4.1-2: Initial conditions for NR SA FR1 UE UL carrier RRC reconfiguration delay

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.1.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 6.5.4.1.4.1-3.
2. Message contents are defined in clause 6.5.4.1.4.3.

3. There are two NR FR1 carriers and two cells in the test. Cell 1 is PCell on the primary component carrier, Cell 2 is SCell on the secondary component carrier. Cell 1 is the cell used for connection setup with the power levels set according to Table A.6.5.4.1.5-1 for this test. Cell 2 is configured according to Annex C.1.1 and C.1.2.

Table 6.5.4.1.4.1-3: General test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on Pcell

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1,2,3, 4, 5, 6, 7, 8, 9	1, 2	Two radio channels are used for this test.
Active cell		Config 1,2,3, 4, 5, 6, 7, 8, 9	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1,2,3, 4, 5, 6, 7, 8, 9	Normal	
DRX		Config 1,2,3, 4, 5, 6, 7, 8, 9	OFF	
Measurement gap pattern Id		Config 1,2,3, 4, 5, 6, 7, 8, 9	OFF	
Filter coefficient		Config 1,2,3, 4, 5, 6, 7, 8, 9	0	L3 filtering is not used
T1	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	
T2	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	
T3	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	

6.5.4.1.4.2 Test procedure

There are two cells: FR1 PCell (cell 1) and FR1 SCell (cell 2). Both NR uplink and supplementary uplink are broadcast by *ServingCellConfigCommonSIB.*

The test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, NR uplink of cell 1 is configured to UE. At the start of T2, a supplementary uplink cell (Cell 2) is configured to UE through *RRCReconfiguration*, then UE shall start transmission on the supplementary uplink. At the start of T3, the supplementary uplink is released through *RRCReconfiguration*.

At the start of the test the UE is in RRC_CONNECTED state with Cell 1 (NR uplink cell). The SS shall provide continuous UL grants to the UE, so it can transmit in the corresponding uplink carrier as soon as it is ready for transmission.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Setup PCell (Cell 1) according to parameters given in Table 6.5.4.1.5-1. Propagation conditions are set according to Annex C clause C.2.2.

3. Both Cell 1 NR uplink and SUL Cell 2 supplementary uplink are broadcast by *ServingCellConfigCommonSIB* of Cell 1.

4. During time duration T1, NR uplink (Cell 1) is configured on the UE. Setup Cell 1 according to parameters given in Table 6.5.4.1.5-1.

5. At the start of T2, the supplementary uplink Cell (Cell 2) is configured to UE through *RRCReconfiguration*, then UE shall start transmission on the supplementary uplink Cell (Cell 2) within 20ms. If UE transmits data on the supplementary uplink Cell (Cell 2) within 20ms from the start of T2, then count a success for the event "reconfiguration" otherwise count a failure for event "reconfiguration" and proceed with step 7.

6. At the start of T3, the supplementary uplink is released through *RRCReconfiguration*, then UE shall transmit data only on the NR uplink carrier of SCell within 20ms. If UE stops transmitting data on supplementary uplink carrier on SCell (Cell 2) within 20ms from the start of T3, then count a success for the event "deconfiguration" otherwise count a failure for event "deconfiguration".

7. Repeat steps 1-6 until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

6.5.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.5.4.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.8-1 Table H.3.8-2 Table 4.6.3-128 in 38.508-1 [14] with condition SUL Table 4.6.3-167 in 38.508-1 [14] with condition PUSCH_PUCCH_ON_SUL Table 4.6.3-169 in 38.508-1 [14] with condition SUL Table 4.6.3-202 in 38.508-1 [14] with condition SUL_SUL

6.5.4.1.5 Test requirement

Table 6.5.4.1.5.1-1 and 6.5.4.1.5-2 define the primary level settings including test tolerances for UE UL carrier RRC reconfiguration delay test.

Table 6.5.4.1.5-1: NR Cell specific test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on PCell (Cell 1)

Parameter	Unit	Test Configuration	Test 1		
			T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1		
TDD configuration		Conf 1, 2, 3	N/A		
		Conf 4, 5, 6	TDD Conf.1.1		
		Conf 7, 8, 9	TDD Conf.2.1		
$BW_{channel}$	MHz	Conf 1, 2, 3	Note 6		
		Conf 4, 5, 6	Note 6		
		Conf 7, 8, 9	Note 6		
$BW_{occupied}$	RB	Conf 1, 2, 3	52 Note 4		
		Conf 4, 5, 6	52 Note 4		
		Conf 7, 8, 9	106 Note 5		
PDSCH reference measurement channel as defined in A.1.1		Conf 1, 2, 3	SR.1.1 FDD		
		Conf 4, 5, 6	SR.1.1 TDD		
		Conf 7, 8, 9	SR 2.1 TDD		
RMSI CORESET reference measurement channel as defined in A.1.2		Conf 1, 2, 3	CR.1.1 FDD		
		Conf 4, 5, 6	CR.1.1 TDD		
		Conf 7, 8, 9	CR.2.1 TDD		
RMC CORESET reference measurement channel as defined in A.1.3		Conf 1, 2, 3	CCR.1.1 FDD		
		Conf 4, 5, 6	CCR.1.1 TDD		
		Conf 7, 8, 9	CCR.2.1 TDD		
OCNG Pattern Note 1		Conf 1, 2, 3, 4, 5, 6	OP.1 Note 4		
		Config 7, 8, 9	OP.1 Note 5		
SSB configuration		Conf 1, 2, 3, 4, 5, 6	SSB.1 FR1		
		Conf 7, 8, 9	SSB.2 FR1		
SMTC configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTC.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD		
		Conf 2	TRS.1.1 FDD		
		Conf 3	TRS.1.1 FDD		
		Conf 4	TRS.1.1 TDD		

		Conf 5	TRS.1.1 TDD		
		Conf 6	TRS.1.1 TDD		
		Conf 7	TRS.1.2 TDD		
		Conf 8	TRS.1.2 TDD		
		Conf 9	TRS.1.2 TDD		
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1		
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1		
UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1		
EPRE ratio of PSS to SSS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0		
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} Note 2	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102		
	dBm/ SCS	Conf 1,2,3,4,5,6	-102		
		Conf 7,8,9	-99		
$\hat{E}_s / N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
$\hat{E}_s / I_{ot}$ Note 3	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
SS-RSRP Note 3	dBm/ SCS	Conf 1,2,3,4,5,6	-86	-86	-86
		Conf 7,8,9	-83	-83	-83
Io Note 3	dBm/ 9.36 MHz	Conf 1,2,3,4,5,6	-57.9	-57.9	-57.9
	dBm/ 38.16 MHz	Conf 7,8,9	-51.8	-51.8	-51.8
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN		
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2		

NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
NOTE 3: $\hat{E}_s/I_{ot}$, Io, and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
NOTE 6: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table 6.5.4.1.5-2: NR Cell specific test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on SUL Cell (Cell 2)

Parameter	Unit	Test Configuration	Test 1		
			T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	2		
TDD configuration		Conf 1, 4, 7	N/A		
		Conf 2, 5, 8	TDDConf.1.1		
		Conf 3, 6, 9	TDDConf.2.1		
$BW_{channel}$	MHz	Conf 1, 4, 7	Note 6		
		Conf 2, 5, 8	Note 6		
		Conf 3, 6, 9	Note 6		
$BW_{occupied}$	RB	Conf 1, 4, 7	52 Note 4		
		Conf 2, 5, 8	52 Note 4		
		Conf 3, 6, 9	106 Note 5		
PUSCH parameters for NR UL carrier		Conf 1, 4, 7	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]
		Conf 2, 5, 8	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]
		Conf 3, 6, 9	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]
PUCCH parameters For NR UL carrier		Conf 1, 4, 7	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]
		Conf 2, 5, 8	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]
		Conf 3, 6, 9	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]
PUSCH parameters for supplementary UL		Conf 1, 4, 7	N/A	G-FR1-A3-10 in [13]	N/A
		Conf 2, 5, 8	N/A	G-FR1-A3-10 in [13]	N/A
		Conf 3, 6, 9	N/A	G-FR1-A3-14 in [13]	N/A
PUCCH parameters for supplementary UL		Conf 1, 4, 7	N/A	N/A	N/A
		Conf 2, 5, 8	N/A	N/A	N/A
		Conf 3, 6, 9	N/A	N/A	N/A
PDSCH reference measurement channel as defined in A.1.1		Conf 1, 4, 7	SR.1.1 FDD		
		Conf 2, 5, 8	SR.1.1 TDD		
		Conf 3, 6, 9	SR 2.1 TDD		
RMSI CORESET reference measurement channel as defined in A.1.2		Conf 1, 4, 7	CR.1.1 FDD		
		Conf 2, 5, 8	CR.1.1 TDD		
		Conf 3, 6, 9	CR.2.1 TDD		

RMC CORESET reference measurement channel as defined in A.1.3		Conf 1, 4, 7	CCR.1.1 FDD		
		Conf 2, 5, 8	CCR.1.1 TDD		
		Conf 3, 6, 9	CCR.2.1 TDD		
OCNG Pattern Note 1		Conf 1, 2, 4, 5, 7, 8	OP.1 Note 4		
		Conf 3, 6, 9	OP.1 Note 5		
SSB configuration		Conf 1, 2, 4, 5, 7,8	SSB.1 FR1		
		Conf 3, 6, 9	SSB.2 FR1		
SMTC configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTC.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD		
		Conf 2	TRS.1.1 TDD		
		Conf 3	TRS.1.2 TDD		
		Conf 4	TRS.1.1 FDD		
		Conf 5	TRS.1.1 TDD		
		Conf 6	TRS.1.2 TDD		
		Conf 7	TRS.1.1 FDD		
		Conf 8	TRS.1.1 TDD		
		Conf 9	TRS.1.2 TDD		
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1		
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1		
UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1		
EPRE ratio of PSS to SSS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0		
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} Note 2	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102		
	dBm/ SCS	Conf 1, 2, 4, 5, 7,8	-102		
		Conf 3, 6, 9	-99		
$\hat{E}_s / N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
$\hat{E}_s / I_{ot}$ Note 3	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
SS-RSRP Note 3	dBm/ SCS	Conf 1, 2, 4, 5, 7,8	-86	-86	-86
		Conf 3, 6, 9	-83	-83	-83

Io Note 3	dBm/ 9.36 MHz	Conf 1, 2, 4, 5, 7,8	-57.9	-57.9	-57.9
	dBm/ 38.16 MHz	Conf 3, 6, 9	-51.8	-51.8	-51.8
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN		
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2		
SUL RSRP threshold (*rsrp-ThresholdSSB-SUL*)	dBm	Conf 1,2,3,4,5,6	-75		
		Conf 7,8,9	-72		
NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$. NOTE 3: $\hat{E}_s/I_{ot}$, Io, and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured. NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured. NOTE 6: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.					

The UE shall be ready to start transmission on the supplementary uplink carrier on SCell within 20 ms from the start of T2.

The UE shall stop the transmission on the supplementary uplink carrier on SCell within 20 ms from the start of T3.

All of the above test requirements shall be fulfilled in order for the observed UE UL carrier configuration delay and UE UL carrier release delay to be counted as correct. The rate of correct observed UE UL carrier configuration delay and UE UL carrier release delay during repeated tests shall be at least 90%.

6.5.5 Link recovery procedures

6.5.5.0 Minimum conformance requirements

6.5.5.0.1 Minimum conformance requirements for SSB-based BFD and link recovery procedures

Same as in the clause 4.5.5.0.1.

6.5.5.0.2 Minimum conformance requirements for CSI-RS-based BFD and link recovery procedures

UE shall be able to evaluate whether the downlink radio link quality on the configured CSI-RS resource in set $\bar{q}_0$ estimated over the last $T_{Evaluate_BFD_CSI-RS}$ [ms] period becomes worse than the threshold $Q_{out_LR_CSI-RS}$ within $T_{Evaluate_BFD_CSI-RS}$ [ms] period.

The value of $T_{Evaluate_BFD_CSI-RS}$ is defined in Table 8.5.3.2-1 for FR1.

For FR1,

- P=1/(1 – T_{CSI-RS}/MGRP), when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

Longer evaluation period would be expected if the combination of BFD-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

The values of M_{BFD} used in Table 6.5.5.0.2-1 is defined as

- M_{BFD} = 10, if the CSI-RS resource configured for BFD is transmitted with Density = 3.

Table 6.5.5.0.2-1: Evaluation period $T_{Evaluate_BFD_CSI\text{-}RS}$ for FR1

Configuration	$T_{Evaluate_BFD_CSI\text{-}RS}$ (ms)
no DRX	max([50], [M_{BFD} *P] * $T_{CSI\text{-}RS}$)
DRX cycle ≤ 320ms	max([50], [1.5×M_{BFD} *P]*max(T_{DRX}, $T_{CSI\text{-}RS}$))
DRX cycle > 320ms	[M_{BFD}*P] * T_{DRX}
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	

When the radio link quality on all the configured RS resources in set $\bar{q}_0$ is worse than Q_{out_LR}, Layer 1 of the UE shall send a beam failure instance indication to the higher layers. A Layer 3 filter may be applied to the beam failure instance indications as specified in TS 38.331 [13].

The beam failure instance evaluation for the configured RS resources in set $\bar{q}_0$ shall be performed as specified in section 6 in TS 38.213 [8]. Two successive indications from Layer 1 shall be separated by at least $T_{Indication_interval_BFD}$.

When DRX is not used, $T_{Indication_interval_BFD}$ is max(2ms, $T_{BFD\text{-}RS,M}$), where $T_{BFD\text{-}RS,M}$ is the shortest periodicity of all configured RS resources in set $\bar{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\bar{q}_0$ or CSI-RS resource in the set $\bar{q}_0$.

When DRX is used, $T_{Indication_interval_BFD}$ is max(1.5*DRX_cycle_length, 1.5*$T_{BFD\text{-}RS,M}$) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms.

UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in set $\bar{q}_1$ estimated over the last $T_{Evaluate_CBD_CSI\text{-}RS}$ [ms] period becomes better than the threshold Q_{in_LR} within $T_{Evaluate_CBD_CSI\text{-}RS}$ [ms] period provided CSI-RS Ês/Iot is according to Annex Table B.2.4.2 for a corresponding band.

The value of $T_{Evaluate_CBD_CSI\text{-}RS}$ is defined in Table 6.5.5.0.2-2 for FR1.

For FR1,

- P=1/(1 – $T_{CSI\text{-}RS}$/MGRP), when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

In both FR1 and FR2, if different SCS is used for SSB and CSI-RS, and the UE does not support *simultaneousRxDataSSB-DiffNumerology*, it is assumed that the CSI-RS configured for candidate beam detection and each SSB shall be TDMed transmitted.

The values of M_{CBD} used in Table 6.5.5.0.2-2 is defined as

- M_{CBD} = 3, if the CSI-RS resource configured in the set $\bar{q}_1$ is transmitted with Density = 3.

Table 6.5.5.0.2-2: Evaluation period $T_{Evaluate_CBD_CSI\text{-}RS}$ for FR1

Configuration	$T_{Evaluate_CBD_CSI\text{-}RS}$ (ms)
non-DRX	max([25], ceil(M_{CBD} *P) * $T_{CSI\text{-}RS}$)
DRX cycle ≤ 320ms	ceil(M_{CBD} *P*N) * max(T_{DRX}, $T_{CSI\text{-}RS}$)
DRX cycle > 320ms	ceil(M_{CBD} *P) *T_{DRX}
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

The normative reference for this requirement is TS 38.133 [6] clause 8.5.3.2, 8.5.4 and 8.5.6.2.

6.5.5.0.3 Scheduling availability of UE during beam failure detection and candidate beam detection

Same as in the clause 4.5.5.0.3.

6.5.5.0.4 Requirements for Beam Failure Recovery in SCell

Same as in the clause 4.5.5.0.4.

6.5.5.0.5 TRP specific Minimum conformance requirements

[TS 38.133, clause 8.18.3]

6.5.5.0.5.1 Requirements for CSI-RS based beam failure detection

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ estimated over the last $T_{Evaluate_BFD_CSI\text{-}RS}$ ms period becomes worse than the threshold $Q_{out_LR_CSI\text{-}RS}$ within $T_{Evaluate_BFD_CSI\text{-}RS}$ ms period.

The value of $T_{Evaluate_BFD_CSI\text{-}RS}$ is defined in Table 6.5.5.0.5.1-1 for FR1.

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS.
- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{BFD} used in Table 6.5.5.0.5.1-1 is defined as

- M_{BFD} = 10, if the CSI-RS resource(s) in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ used for BFD is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{BFD} used in Table 6.5.5.0.5.1-1 is defined as

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{BFD} = 1.

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for PSCell in NR-DC

P_{BFD} = 2 if UE is configured for beam failure detection on SCell, 1 otherwise.

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for a SCell

- P_{BFD} = Z in EN-DC or NE-DC or SA.
- P_{BFD} = 2* Z in NR-DC.

Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell.

Table 6.5.5.0.5.1-1: Evaluation period $T_{Evaluate_BFD_CSI\text{-}RS}$ for FR1

Configuration	$T_{Evaluate_BFD_CSI\text{-}RS}$ (ms)

no DRX	Max(50, Ceil($M_{BFD} \times P \times P_{BFD}$) × T_{CSI-RS})
DRX cycle ≤ 320ms	Max(50, Ceil(1.5 × $M_{BFD} \times P \times P_{BFD}$) × Max($T_{DRX}$, T_{CSI-RS}))
RX cycle > 320ms	Ceil($M_{BFD} \times P \times P_{BFD}$) × T_{DRX}
Note: T_{CSI-RS} is the periodicity of CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

6.5.5.0.5.2 Requirements for CSI-RS based candidate beam detection

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ estimated over the last $T_{Evaluate_CBD_CSI-RS}$ [ms] period becomes better than the threshold Q_{in_LR} within $T_{Evaluate_CBD_CSI-RS}$ [ms] period provided CSI-RS Ês/Iot is according to Annex Table B.2.4.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in Table 6.5.5.0.5.2-1 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_CSI-RS}$ is defined in Table 6.5.5.0.5.2-1 for FR1.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Longer evaluation period would be expected if the CSI-RS is on the same OFDM symbols with RLM, BFD, BM-RS, or other CBD-RS, according to the measurement restrictions defined in clause 8.18.6.3 of TS38.133.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{CBD} used in Table 6.5.5.0.5.2-1 is defined as

- M_{CBD} = 3, if the CSI-RS resource configured in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{CBD} used in Table 6.5.5.0.5.2-1 is defined as

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- P_{CBD} = 1.

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PSCell in NR-DC

- P_{CBD} = 2 if UE configured for candidate beam detection on SCell, 1 otherwise.

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for a SCell

- P_{CBD} = Z in EN-DC or NE-DC or SA.
- P_{CBD} = 2* Z in NR-DC.

  Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell

- P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

Table 6.5.5.0.5.2-1: Evaluation period $T_{Evaluate_CBD_CSI-RS}$ for FR1

Configuration	$T_{EvaluateC_CBD_CSI-RS}$ (ms)
non-DRX, DRX cycle ≤ 320ms	Max(25, Ceil($M_{CBD} \times P \times P_{CBD}$) × T_{CSI-RS})
DRX cycle > 320ms	Ceil($M_{CBD} \times P \times P_{CBD}$) × T_{DRX}
Note: T_{CSI-RS} is the periodicity of CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

6.5.5.0.5.3 Requirements for TRP specific Beam Failure Recovery

Same as in the clause 4.5.5.0.5.3.

6.5.5.0.5.4 Scheduling availability of UE during TRP specific beam failure detection

Same as in the clause 4.5.5.0.5.4.

6.5.5.0.5.5 Scheduling availability of FR1 UE during TRP specific candidate beam detection

Same as in the clause 4.5.5.0.5.5

6.5.5.1 NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX

6.5.5.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

6.5.5.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR1 and link recovery.

6.5.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.5.1.

6.5.5.1.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.5.1.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate SSB based beam failure. Figure 6.5.5.1.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q1 of the candidate beam used for link recovery

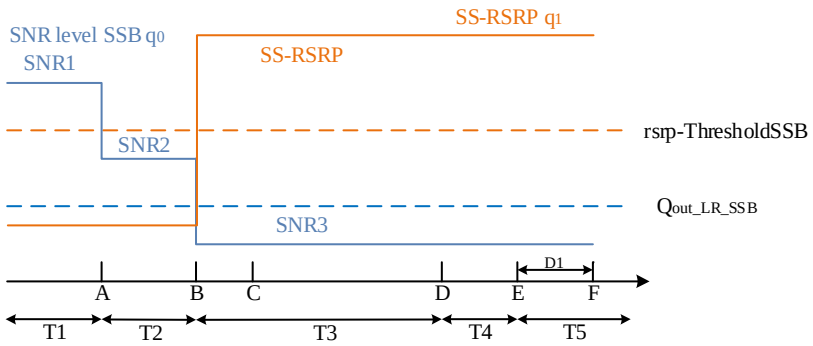

Figure 6.5.5.1.4-1: SNR and L1-RSRP variation for NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX mode

6.5.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.5.1.4.1-1.

Table 6.5.5.1.4.1-1: Supported test configurations for NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX mode

Configuration	Description
6.5.5.1-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth

6.5.5.1-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.5.1-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.5.1.4.1-2.

Table 6.5.5.1.4.1-2: Initial conditions for NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.5.5.1.4.1-3.
2. Message contents are defined in clause 6.5.5.1.4.3.
3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.5.5.1.4.1-3: General test parameters for NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
BWchannel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1. FDD	
	Config 2		CCR.1.1. TDD	
	Config 3		CCR.2.1. TDD	
SSB Configuration	Config 1		SSB.3 FR1	

		Config 2		SSB.3 FR1	
		Config 3		SSB.4 FR1	
SMTC Configuration		Config 1, 2		SMTC.1	
		Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing		Config 1, 2		15 KHz	
		Config 3		30 KHz	
PRACH Configuration		Config 1, 2		PRACH.2 FR1	
		Config 3		PRACH.2 FR1	
SSB Index assigned as BFD RS (q_0)				0	
SSB Index assigned as CBD RS (q_1)				1	
OCNG parameters				OP.1	
CP length				Normal	
Correlation Matrix and Antenna Configuration				2x2 Low	
Beam failure detection transmission parameters	DCI format			1-0	
	Number of Control OFDM symbols			2	
	Aggregation level		CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0	
	DMRS precoder granularity			REG bundle size	
	REG bundle size			6	
DRX				OFF	
Gap pattern ID				gp0	
gapOffset				0	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB	Config 1, 2		dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		dBm/ SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer				pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for CSI reporting	Config 1			CSI-RS.1.1 FDD	
	Config 2			CSI-RS.1.1 TDD	
	Config 3			CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1			TRS.1.1 FDD	
	Config 2			TRS.1.1 TDD	
	Config 3			TRS.1.2 TDD	

SSB Index assigned as RLM RS		0, 1	
T310 Timer	ms	1000	
N310		2	
T1	s	0.2	During this time the UE shall be fully synchronized to cell 1
T2	s	0.37	
T3	s	0.24	
T4	s	0	
T5	s	0.17	
D1	s	0.14	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

6.5.5.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS sends an *RRCReconfiguration* message to the UE to configure inter-frequency measurement.

3. The UE sends an *RRCReconfigurationComplete* message.

4. Set the parameters of NR Cell 1 according to T1 in Table 6.5.5.1.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.5.1.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.5.1.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 6.5.5.1.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 6.5.5.1.5-1. T5 starts.

9. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B

   and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

10. Switch the UE off and on. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 4-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 4.6 and 7.3.1 with condition "Short_DCI" with the following exceptions:

Table 6.5.5.1.4.3-1: Common Exception messages for NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-6 with Condition BFD Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, GAP_NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier center of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.1-10B Table H.3.5-4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.5.5.1.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbol 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 6.5.5.1.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 6.5.5.1.4.3-4: Void

Table 6.5.5.1.4.3-5: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 6.5.5.1.4.3-6: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

Table 6.5.5.1.4.3-7: PDCCH *Search Space* for USS

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	2		
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n1		
aggregationLevel4	n1		
aggregationLevel8	n0		
}			
}			

6.5.5.1.5 Test requirement

Tables 6.5.5.1.4.1-3 and 6.5.5.1.5-1 define the primary level settings including test tolerances for NR SA FR1 SSB-based beam failure detection and link recovery in DRX.

Table 6.5.5.1.5-1: NR Cell specific test parameters for NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				

EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_ SSB of set q_0	Config 1	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2		5.8	-2.2	-12.8	-12.8	-12.8
	Config 3		5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q1	Config 1	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 2		-10.2	-10.2	10.2	10.2	10.2
	Config 3		-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_1	Config 1	dBm/SCS kHz	-108.2	-108.2	-87.8	-87.8	-87.8
	Config 2		-108.2	-108.2	-87.8	-87.8	-87.8
	Config 3		-105.2	-105.2	-84.8	-84.8	-84.8
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.1.4-1.
Note 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 from D.4.1.1, is -15dB-TT = -15.8dB (including test tolerances).

Table 6.5.5.1.5-2: Void

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 140 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

6.5.5.2 NR SA FR1 SSB-based beam failure detection and link recovery in DRX

6.5.5.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is

to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

6.5.5.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR1, link recovery and long DRX cycle.

6.5.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.5.2.

6.5.5.2.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.5.2.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate SSB based beam failure. Figure 6.5.5.2.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

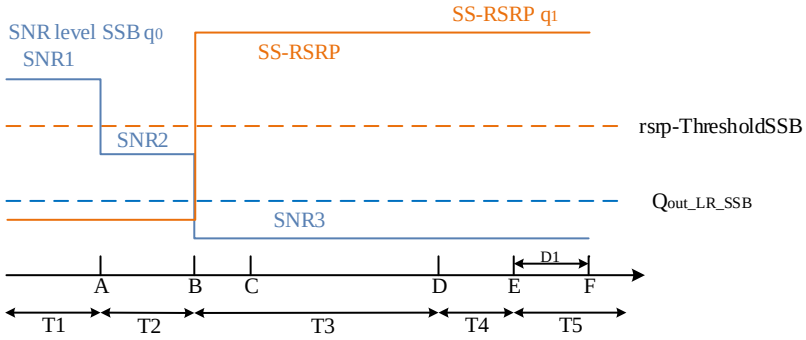

Figure 6.5.5.2.4-1: SNR and L1-RSRP variation for NR SA FR1 SSB-based beam failure detection and link recovery in DRX

6.5.5.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.5.2.4.1-1.

Table 6.5.5.2.4.1-1: Supported test configurations for NR SA FR1 SSB-based beam failure detection and link recovery in DRX

Configuration	Description
6.5.5.2-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.5.2-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.5.2-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.5.2.4.1-2.

Table 6.5.5.2.4.1-2: Initial conditions for NR SA FR1 SSB-based beam failure detection and link recovery in DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.	
Channel bandwidth	As specified by the test configuration selected from Table 6.5.5.2.4.1-1.	

Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.5.5.2.4.1-3.

2. Message contents are defined in clause 6.5.5.2.4.3.

3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.5.5.2.4.1-3: General test parameters for NR SA FR1 SSB-based beam failure detection and link recovery in DRX

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
BWchannel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1. FDD	
	Config 2		CCR.1.1. TDD	
	Config 3		CCR.2.1. TDD	
SSB Configuration	Config 1		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.4 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2		PRACH.2 FR1	
	Config 3		PRACH.2 FR1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	

Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	see clause A.3.3.7 of TS 38.133 [6]
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3	dBm/ SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	3.24	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

6.5.5.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell 1 according to T1 in Table 6.5.5.2.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.5.2.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.5.2.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 6.5.5.2.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 6.5.5.2.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B

   and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. Switch the UE off and on. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.5.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 4.6 and 7.3.1 with condition “Short_DCI” with the following exceptions:

Table 6.5.5.2.4.3-1: Common Exception messages for NR SA FR1 SSB-based beam failure detection and link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.1-10B Table H.3.5-4 Table H.3.7-1 with Condition DRX.7 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.5.5.2.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbol 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 6.5.5.2.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 6.5.5.2.4.3-4: Void

Table 6.5.5.2.4.3-5: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 6.5.5.2.4.3-6: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**

ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

Table 6.5.5.2.4.3-7: PDCCH *Search Space* for USS

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	2		
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n1		
aggregationLevel4	n1		
aggregationLevel8	n0		
}			
}			

6.5.5.2.5 Test requirement

Tables 6.5.5.2.4.1-3 and 6.5.5.2.5-1 define the primary level settings including test tolerances for NR SA FR1 SSB-based beam failure detection and link recovery in DRX.

Table 6.5.5.2.5-1: NR Cell specific test parameters for NR SA FR1 SSB-based beam failure detection and link recovery in DRX

Parameter		**Unit**	**Test 1**				
			T1	**T2**	**T3**	**T4**	**T5**
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_ SSB of set q_0	Config 1	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2		5.8	-2.2	-12.8	-12.8	-12.8
	Config 3		5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q1	Config 1	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 2		-10.2	-10.2	10.2	10.2	10.2
	Config 3		-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_1	Config 1	dBm/SCS kHz	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 2		-108.2	-108.2	−87.8	−87.8	−87.8
	Config 3		-105.2	-105.2	−84.8	−84.8	−84.8
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.2.4-1.
Note 9:	The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 from D.4.1.1, is -15dB-TT = -15.8dB (including test tolerances).

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1940 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

6.5.5.3 NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

6.5.5.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. To test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

6.5.5.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR1, CSI-RS based RLM and link recovery.

6.5.5.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.5.3.

6.5.5.3.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.5.3.4-1 shows the five different time durations and the corresponding variation of the downlink SNR of the CSI-RS in set q0 in the active cell to emulate CSI-RS based beam failure and the variation of the downlink L1-RSRP of the CSI-RS in set q1 of the candidate beam used for link recovery.

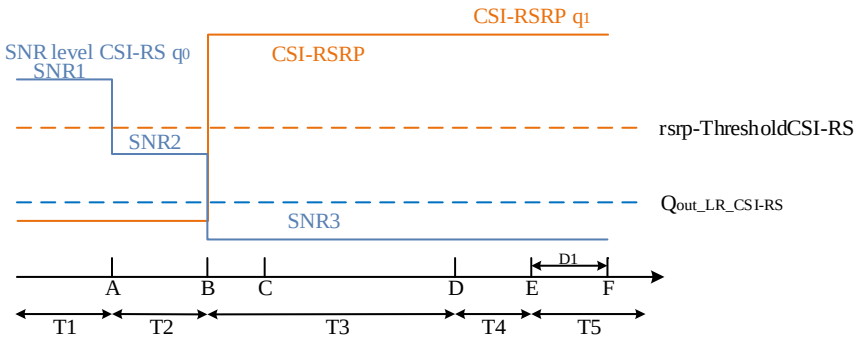

Figure 6.5.5.3.4-1: SNR and L1-RSRP variation for NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

6.5.5.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.5.3.4.1-1.

Table 6.5.5.3.4.1-1: Supported test configurations for NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

Configuration	Description
6.5.5.3-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.5.3-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.5.3-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.5.3.4.1-2.

Table 6.5.5.3.4.1-2: Initial conditions for NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.5.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.5.5.3.4.1-3.
2. Message contents are defined in clause 6.5.5.3.4.3.
3. There is one NR carrier and one NR cell specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.5.5.3.4.1-3: General test parameters for NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

Parameter	Unit	Value	Comment
		Test 1	

Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1. FDD	
	Config 2		CCR.1.1. TDD	
	Config 3		CCR.2.1. TDD	
SSB Configuration	Config 1		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.4 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2		PRACH.4 FR1	
	Config 3		PRACH.4 FR1	
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	N
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3	dBm/SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], section 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], section 5.17
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	

CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.08	
D1		s	0.05	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

6.5.5.3.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell 1 according to T1 in Table 6.5.5.3.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.5.3.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.5.3.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 6.5.5.3.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 6.5.5.3.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B

   and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. Switch the UE off and on. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.5.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.5.3.4.3-1: Common Exception messages for NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-10 with Condition CSI-RS Table H.3.1-10A Table H.3.1-10B Table H.3.5-4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.5.5.3.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbol 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 6.5.5.3.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 6.5.5.3.4.3-4: Void

Table 6.5.5.3.4.3-5: *NZP-CSI-RS-Resource*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-85			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
powerControlOffsetSS	db0		
}			

Table 6.5.5.3.4.3-6: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 6.5.5.3.4.3-7: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

6.5.5.3.5 Test requirement

Tables 6.5.5.3.4.1-3 and 6.5.5.3.5-1 define the primary level settings including test tolerances for NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX.

Table 6.5.5.3.5-1: NR Cell specific test parameters for NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX

Parameter		**Unit**	**Test 1**				
			T1	**T2**	**T3**	**T4**	**T5**
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2		5.8	-2.2	-12.8	-12.8	-12.8
	Config 3		5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set q1	Config 1	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 2		-10.2	-10.2	10.2	10.2	10.2
	Config 3		-10.2	-10.2	10.2	10.2	10.2
CSI-RS_RP of set q_1	Config 1		-108.2	-108.2	−87.8	−87.8	−87.8

	Config 2	dBm/SCS kHz	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 3		-105.2	-105.2	−84.8	−84.8	−84.8
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Void							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.3.4-1.							
Note 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 from D.4.1.1, is -15dB-TT = -15.8dB (including test tolerances).							

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 50 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

6.5.5.4 NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX

6.5.5.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. To test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

6.5.5.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR1, CSI-RS based RLM, link recovery and long DRX cycle.

6.5.5.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.5.4.

6.5.5.4.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.5.4.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active

cell to emulate CSI-RS based beam failure. Figure 6.5.5.4.4-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

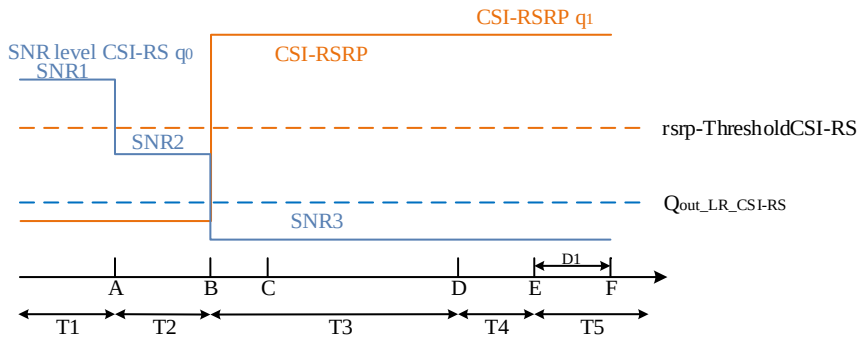

Figure 6.5.5.4.4-1: SNR and L1-RSRP variation for NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX

6.5.5.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.5.4.4.1-1.

Table 6.5.5.4.4.1-1: Supported test configurations for NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX

Configuration	Description
6.5.5.4-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.5.4-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.5.4-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.5.4.4.1-2.

Table 6.5.5.4.4.1-2: Initial conditions for NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.5.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.5.5.4.4.1-3.
2. Message contents are defined in clause 6.5.5.4.4.3.
3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.5.5.4.4.1-3: General test parameters for NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1. FDD	
	Config 2		CCR.1.1. TDD	
	Config 3		CCR.2.1. TDD	
SSB Configuration	Config 1		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.4 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2		PRACH.4 FR1	
	Config 3		PRACH.4 FR1	
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3	dBm/SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS

beamFailureInstanceMaxCount			n1	see TS 38.321 [12], section 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], section 5.17
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

6.5.5.4.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell 1 according to T1 in Table 6.5.5.4.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 6.5.5.4.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 6.5.5.4.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 6.5.5.4.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 6.5.5.4.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B

   and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. Switch the UE off and on. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.5.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.5.4.4.3-1: Common Exception messages for NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-10 with Condition CSI-RS Table H.3.1-10A Table H.3.1-10B Table H.3.5-4 Table H.3.7-1 with Condition DRX.7Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.5.5.4.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbol 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 6.5.5.4.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 6.5.5.4.4.3-4: Void

Table 6.5.5.3.4.3-5: *NZP-CSI-RS-Resource*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-85			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
powerControlOffsetSS	db0		
}			

Table 6.5.5.4.4.3-6: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 6.5.5.4.4.3-7: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

6.5.5.4.5 Test requirement

Tables 6.5.5.4.4.1-3 and 6.5.5.4.5-1 define the primary level settings including test tolerances for NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX.

Table 6.5.5.4.5-1: NR Cell specific test parameters for NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX

Parameter	**Unit**	**Test 1**				
		T1	**T2**	**T3**	**T4**	**T5**
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					

EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2		5.8	-2.2	-12.8	-12.8	-12.8
	Config 3		5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set q1	Config 1	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 2		-10.2	-10.2	10.2	10.2	10.2
	Config 3		-10.2	-10.2	10.2	10.2	10.2
CSI-RS_RP of set q_1	Config 1	dBm/SCS kHz	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 2		-108.2	-108.2	−87.8	−87.8	−87.8
	Config 3		-105.2	-105.2	−84.8	−84.8	−84.8
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.4.4-1.
Note 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 from D.4.1.1, is -15dB-TT = -15.8dB (including test tolerances).

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1940 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

6.5.5.5 NR SA FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX

6.5.5.5.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. To test the downlink monitoring for beam failure detection within the UEs active DL BWP without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

6.5.5.5.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting 5GS NR SA FR1, CSI-RS based RLM, SSB link recovery and SCell beam failure recovery.

6.5.5.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.5.0.2 and 6.5.5.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.5.5.

6.5.5.5.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.5.5.4-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure 6.5.5.5.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

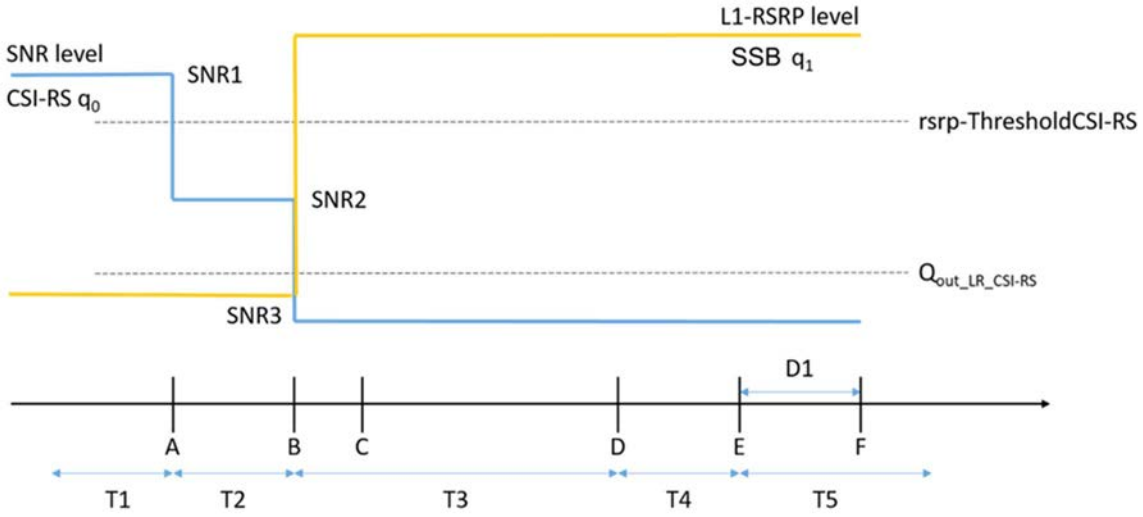

Figure 6.5.5.5.4-1: SNR and L1-RSRP variation for NR SA FR1 CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX

6.5.5.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.5.5.4.1-1.

Table 6.5.5.5.4.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
6.5.5.5-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.5.5-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.5.5-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.5.5.4.1-2.

Table 6.5.5.5.4.1-2: Initial conditions for NR SA FR1 CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.5.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part	

1. The general test parameter settings are set up according to Table 6.5.5.5.4.1-3.

2. Message contents are defined in clause 6.5.5.5.4.3.

3. There is one NR carrier and two NR cells specified in the test. Cell 1 is the NR cell (PCell) used for connection setup and Cell 2 is the NR cell (SCell) with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.5.5.5.4.1-3: General test parameters for NR SA FR1 CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCEll			2	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
BW channel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		40: NRB,c = 106	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1		CR.1.1 FDD	A.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
SSB Configuration	Config 1		SSB.1 FR1	A.3
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.4
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	15	
	Config 3		30	
PRACH Configuration	Config 1, 2		PRACH.2 FR1	Table A.7.1-1
	Config 3		PRACH.2 FR1	Table A.7.1-1
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS	dB	0	

	energy to average CSI-RS RE energy			
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for q_0 in activated SCell	Config 1		CSI-RS.1.2 FDD	A.1.4
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.1.4
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS in PCell	Config 1		CSI-RS.1.2 FDD	A.1.4
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

6.5.5.5.4.2 Test procedure

Same test procedure as described in section 6.5.5.3.4.2, except following exception and steps 7 and 8:

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

7. If the SS:

a) detects uplink power on the PCell equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

and

b) does not detect preamble on the PCell before time point B

and

c) detects preamble on the preconfigured PRACH resource before time point F (D1 after the start of T5).

And

d) SS transmits a RAR to UE after receiving the preamble transmitted by the UE. SS detects the MAC-CE on the PCell transmitted by the UE providing the index for the activated SCell, and the index for the SSB provided by higher layer.

the number of successful tests is increased by one.

Otherwise the number of failed tests is increased by one.

8. If the iteration or random access procedure for BFD fails, the SS shall first attempt to release and add the FR1 SCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameter *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.

6.5.5.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.5.5.4.3-1: Common Exception messages for NR SA FR1 SCell CSI-RS-based beam failure detection and SSB-based link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.5-4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.5.5.5.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbol 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS

dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 6.5.5.5.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 6.5.5.5.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 6.5.5.5.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

6.5.5.5.5 Test requirement

Tables 6.5.5.5.4.1-3 and 6.5.5.5.5-1 define the primary level settings including test tolerances for NR SA FR1 SCell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX.

Table 6.5.5.5.5-1: NR Cell specific test parameters for NR SA FR1 SCell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX

Parameter	Unit	Cell1	Test 1 Cell2				
		T1 to T5	T1	T2	T3	T4	T5

EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2		5	5.8	-2.2	-12.8	-12.8	-12.8
	Config 3		5	5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q_1	Config 1	dB	-10	-10.2	-10.2	10.2	10.2	10.2
	Config 2		-10	-10.2	-10.2	10.2	10.2	10.2
	Config 3		-10	-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_1	Config 1	dBm/ SCS kHz	-108	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 2		-108	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 3		-105	-105.2	-105.2	−84.8	−84.8	−84.8
N_{oc}	Config 1	dBm/ 15kHz	-98	-98				
	Config 2		-98	-98				
	Config 3		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.5.4-1.
Note 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 from D.4.1.1, is -15dB-TT = -15.8dB (including test tolerances).

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1. The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

6.5.5.6 NR SA FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in DRX

6.5.5.6.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. To test the downlink monitoring for beam failure detection within the UEs active DL BWP without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5.

6.5.5.6.2 Test applicability

This test applies to all types of NR UE release 16 and forward supporting 5GS NR SA FR1, CSI-RS based RLM, SSB link recovery and SCell beam failure recovery.

6.5.5.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.5.0.2 and 6.5.5.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.5.6.

6.5.5.6.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 6.5.5.6.4-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure 6.5.5.6.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

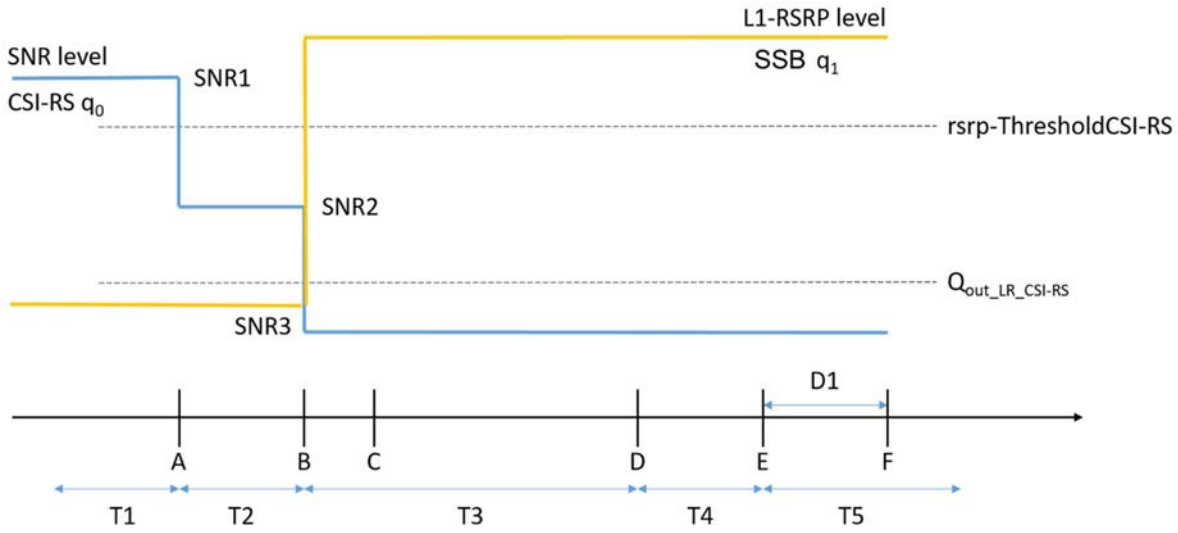

Figure 6.5.5.6.4-1: SNR and L1-RSRP variation for NR SA FR1 CSI-RS-based beam failure detection and SSB-based link recovery for SCell in DRX

6.5.5.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.5.6.4.1-1.

Table 6.5.5.6.4.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
6.5.5.6-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.5.6-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.5.6-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.5.6.4.1-2.

Table 6.5.5.6.4.1-2: Initial conditions for NR SA FR1 CSI-RS-based beam failure detection and SSB-based link recovery for SCell in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.5.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.5.5.6.4.1-3.
2. Message contents are defined in clause 6.5.5.6.4.3.
3. There is one NR carrier and two NR cells specified in the test. Cell 1 is the NR cell (PCell) used for connection setup and Cell 2 is the NR cell (SCell) with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.5.5.6.4.1-3: General test parameters for NR SA FR1 CSI-RS-based beam failure detection and SSB-based link recovery for SCell in DRX

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCell			2	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
BWchannel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		40: NRB,c = 106	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1		CR.1.1 FDD	A.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
SSB Configuration	Config 1		SSB.1 FR1	A.3
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	

SMTC Configuration	Config 1, 2		SMTC.1	A.4
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	15	
	Config 3		30	
PRACH Configuration	Config 1, 2		PRACH.2 FR1	Table A.7.1-1
	Config 3		PRACH.2 FR1	Table A.7.1-1
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.5
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for q_0 in activated SCell	Config 1		CSI-RS.1.2 FDD	A.1.4
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.1.4
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	

CSI-RS-Index assigned as RLM RS in PCell	Config 1		CSI-RS.1.2 FDD	A.1.4
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

6.5.5.6.4.2 Test procedure

Same test procedure as described in section 6.5.5.3.4.2, except following exception and step 7 and 8:

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

7. If the SS:

   a) detects uplink power on the PCell equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect preamble on the PCell before time point B

   and

   c) detects preamble on the preconfigured PRACH resource before time point F (D1 after the start of T5).

   And

   d) SS transmits a RAR to UE after receiving the preamble transmitted by the UE. SS detects the MAC-CE on the PCell transmitted by the UE providing the index for the activated SCell, and the index for the SSB provided by higher layer.

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. If the iteration or random access procedure for BFD fails, the SS shall first attempt to release and add the FR1 SCell, by ensuring the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration.

6.5.5.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.5.6.4.3-1: Common Exception messages for NR SA FR1 SCell CSI-RS-based beam failure detection and SSB-based link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.5-4 Table H.3.7-1 with Condition 'DRX.7' Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.5.5.6.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbol 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 6.5.5.6.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 6.5.5.6.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 6.5.5.6.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

6.5.5.6.5 Test requirement

Tables 6.5.5.6.4.1-3 and 6.5.5.6.5-1 define the primary level settings including test tolerances for NR SA FR1 SCell CSI-RS-based beam failure detection and SSB-based link recovery in DRX.

Table 6.5.5.6.5-1: NR Cell specific test parameters for NR SA FR1 SCell CSI-RS-based beam failure detection and SSB-based link recovery in DRX

Parameter		**Unit**	Cell 1	**Test 1 Cell2**				
			T1 to T5	**T1**	**T2**	**T3**	**T4**	**T5**
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2	dB	5	5.8	-2.2	-12.8	-12.8	-12.8
	Config 3	dB	5	5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q_1	Config 1	dB	-10	-10.2	-10.2	10.2	10.2	10.2
	Config 2	dB	-10	-10.2	-10.2	10.2	10.2	10.2
	Config 3	dB	-10	-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_1	Config 1	dBm/ SCS kHz	-110	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 2		-110	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 3		-107	-105.2	-105.2	−84.8	−84.8	−84.8
N_{oc}	Config 1	dBm/15 kHz	-98	-98				
	Config 2		-98	-98				
	Config 3		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.6.4-1.
Note 9:	The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 from D.4.1.1, is -15dB-TT = -15.8dB (including test tolerances).

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 120+10 ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1. The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

6.5.5.7 NR SA FR1 PCell TRP Specific CSI-RS-based Beam Failure Detection and Link Recovery in DRX

Editor's Note: This test case is incomplete in following aspects:

- TS 38.522 applicability spec update is pending

6.5.5.7.1 Test purpose

The purpose of this test is to verify that the UE properly detects TRP specific CSI-RS-based beam failure in the sets $q_{0,0}$ and $q_{0,1}$ configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set $q_{1,0}$ and $q_{1,1}$. The purpose is to test the downlink monitoring for beam failure detection on TRP1 within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based TRP specific beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.18 with *schedulingRequestID-BFR-r17* configured.

6.5.5.7.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 5GS NR SA FR1, CSI-RS based RLM, TRP Specific CSI-RS-based link recovery and PCell beam failure recovery.

6.5.5.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.5.7.

6.5.5.7.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.7.1-1 shows the variation of the downlink SNR of the CSI-RS in set $q_{0,0}$ and $q_{0,1}$ for TRP1 and TRP2 respectively to emulate CSI-RS based beam failure on TRP1. Figure A.6.5.5.7.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set $q_{1,0}$ and $q_{1,1}$ of the candidate beam used for link recovery.

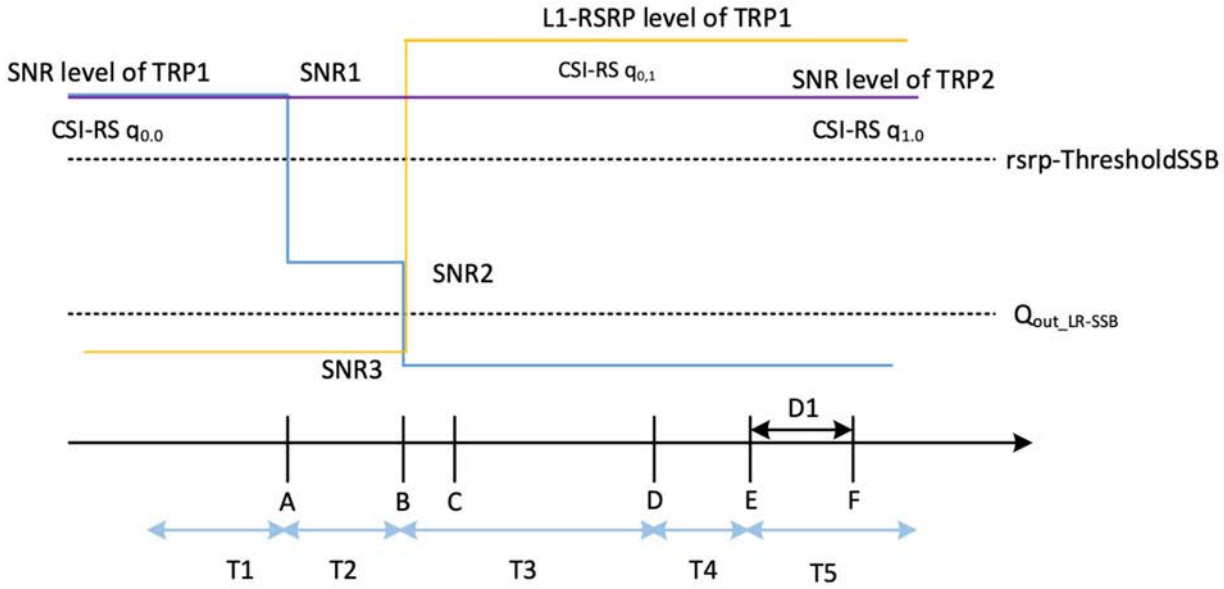

Figure 6.5.5.7.4-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

6.5.5.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.5.7.4.1-1.

Table 6.5.5.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.5.7.4.1-2.

Table 6.5.5.7.4.1-2: Initial conditions for NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.5.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.5.5.7.4.1-3.

2. Message contents are defined in clause 6.5.5.7.4.3.

3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.5.5.7.4.1-3: General test parameters for FR1 PCell for CSI-RS-based TRP specific beam failure detection and link recovery testing in DRX mode

Parameter			Unit	Value	Comment
				Test1	
Active PCell				Cell 1	
RF Channel Number				1	
Duplex mode		Config 1		FDD	
		Config 2, 3		TDD	
TDD Configuration		Config 1		Not Applicable	
		Config 2		TDDConf.1.1	
		Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD	
		Config 2		CR.1.1 TDD	
		Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD	
		Config 2		CCR.1.1 TDD	
		Config 3		CCR.2.1 TDD	
SSB Configuration		Config 1		SSB.3 FR1	
		Config 2		SSB.3 FR1	
		Config 3		SSB.4 FR1	
SMTC Configuration		Config 1, 2		SMTC.1	
		Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing		Config 1, 2		15 KHz	
		Config 3		30 KHz	
PRACH Configuration		Config 1, 2,3		FR1 PRACH configuration 4	
OCNG parameters				OP.1	
CP length				Normal	
Correlation Matrix and Antenna Configuration				2x2 Low	
Beam failure detection transmission parameters	DCI format			1-0	
	Number of Control OFDM symbols			2	
	Aggregation level		CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0	
	DMRS precoder granularity			REG bundle size	
	REG bundle size			6	
DRX				DRX.7	
Gap pattern ID				N.A.	
schedulingRequestID-BFR- r17				Configured	
Periodicity of PUCCH for SR configuration for BFR on PCell		Config 1	slot	5	5ms
		Config 2, 3		10	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB		Config 1, 2		-98	

	Config 3	dBm/SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for TRP0	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for TRP1	Config 1		CSI-RS.1.7 FDD	
	Config 2		CSI-RS.1.6 TDD	
	Config 3		CSI-RS.2.7 TDD	
CSI-RS Index assigned as BFD RS (q0,0)			0	
CSI-RS Index assigned as CBD RS (q1,0)			1	
CSI-RS Index assigned as BFD RS (q0,1)			2	
CSI-RS Index assigned as CBD RS (q1,1)			3	
CSI-RS index assigned as RLM RS			0,1,2,3	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

6.5.5.7.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell 1 according to T1 in Table 6.5.5.7.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR1 and SNR2 values to T2 as specified in Table 6.5.5.7.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR1 and SNR2 values to T3 as specified in Table 6.5.5.7.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR1 and SNR2 values to T4 as specified in Table 6.5.5.7.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR1 and SNR2 values to T5 as specified in Table 6.5.5.7.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect preamble on a beam associated with the candidate beam set q_{10} and q_{11} before time point B

   and

   c) detects preamble on a beam associated with the candidate beam set q_{10} and q_{11} before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. If iteration or the random access procedure for BFD fails, switch the UE off and on. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.5.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.5.7.4.3-1: Common Exception messages for NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8A with Condition CSI-RS BFD Table H.3.1-10 with Condition CSI-RS Table H.3.1-10A Table H.3.1-11 with Condition CSI-RS Table H.3.5-4 Table H.3.7-1 with Condition DRX.7 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1,

Table 6.5.5.4.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbol 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	

}			
}			
}			

Table 6.5.5.4.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 6.5.5.4.4.3-4: Void

Table 6.5.5.3.4.3-5: *NZP-CSI-RS-Resource*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-85			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
powerControlOffsetSS	db0		
}			

Table 6.5.5.4.4.3-6: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 6.5.5.4.4.3-7: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

Table 6.5.5.4.4.3-8:*MAC-CellGroupConfig for R17 BFR*

Derivation Path: TS 38.508-1, Table 4.6.3-68			
Information Element	Value/remark	Comment	Condition
MAC-CellGroupConfig ::= SEQUENCE {			
schedulingRequestID-BFR-r17	Not present		
schedulingRequestID-BFR2-r17	Not present		
schedulingRequestConfig-v1700	SchedulingRequest-Config		
}			

6.5.5.7.5 Test requirement

Tables 6.5.5.7.4.1-3 and 6.5.5.7.5-1 define the primary level settings including test tolerances for NR SA FR1 TRP specific CSI-RS-based beam failure detection and link recovery in DRX.

Table 6.5.5.7.5-1: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set $q_{0,0}$	Config 1	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2		5.8	-2.2	-12.8	-12.8	-12.8
	Config 3		5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set $q_{0,1}$	Config 1	dB	5.8	5.8	5.8	5.8	5.8
	Config 2		5.8	5.8	5.8	5.8	5.8
	Config 3		5.8	5.8	5.8	5.8	5.8
SNR_CSI-RS of set $q_{1,0}$	Config 1	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 2		-10.2	-10.2	10.2	10.2	10.2
	Config 3		-10.2	-10.2	10.2	10.2	10.2
CSI-RS_RP of set $q_{1,0}$	Config 1	dB/SCS kHz	-110.2	-110.2	-87.8	-87.8	-87.8
	Config 2		-110.2	-110.2	-87.8	-87.8	-87.8
	Config 3		-107.2	-107.2	-84.8	-84.8	-84.8
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.7.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause TS38.133 A.3.6.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$.

No later than time point F occurring no later than D1 = 1920+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

6.5.6 Active BWP switch delay

6.5.6.1 DCI-based and time-based active BWP switch

6.5.6.1.0 Minimum conformance requirements

6.5.6.1.0.1 Minimum conformance requirements for DCI-based and time-based active BWP switch

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (FR1) or DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [13] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* [13] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 6.5.6.1.0.1-1.

Table 6.5.6.1.0.1-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5
2	0.25	3	9
3	0.125	6	18
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in TS 38.133 [6] Clause 8.10 in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in TS 38.133 [6] Clause 8.10 in the new BWP.

If the BWP switch is triggered within DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321, 12], UE shall be able to complete active BWP switching within

- $T_{BWPswitchDelay}$, provided that the BWP switching request is received in any of the first 3 OFDM symbols of a slot corresponding to the serving cell where BWP switching occurs, or

- $T_{BWPswitchDelay}$ + 1, provided that the BWP switching request is received after the first 3 OFDM symbols of a slot corresponding to the serving cell where BWP switching occurs

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this section apply for each BWP switch.

When UE receives a DCI indicating UE to switch its active BWP involving changes in any of the parameters listed in Table 6.5.6.1.0.1-3, the UE is allowed to cause interruption of up to X slot to other active serving cells if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 6.5.6.1.0.1-3 and the UE is capable of per-FR gap the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 6.5.6.1.0.1-2. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in TS 38.133 [6] clause 8.6.2. Interruptions are not allowed during BWP switch involving any other parameter change.

When a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [13] expires, UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 6.5.6.1.0.1-3 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 6.5.6.1.0.1-3 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 6.5.6.1.0.1-2. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in TS 38.133 [6] clause 8.6.2. Interruptions are not allowed during BWP switch involving any other parameter change.

Table 6.5.6.1.0.1-2: Interruption length X

μ	NR Slot length (ms)	interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5
Note1:	void	

Table 6.5.6.1.0.1-3: Parameters which cause interruption other than SCS

Parameters	Comment
locationAndBandwidth	From TS 38.331 [13]
nrofSRS-Ports	
maxMIMO-Layers-r16	

The normative reference for this requirement is TS 38.133 [6] clauses 8.6.2 and 8.2.1.2.7

6.5.6.1.1 NR SA FR1-FR1 DCI-based DL active BWP switch in non-DRX

6.5.6.1.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS 38.133 [6] clause 8.6, and interruption requirement on other active serving cell defined in TS 38.133 [6] clause 8.2.2.2.5.

6.5.6.1.1.2 Test applicability

This test applies to all types of NR UE release 15 onwards supporting BWP adaptation of at least 2 BWPs, DCI and timer-based active BWP switching delay Type1 or Type2 and 2DL CA.

6.5.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.6.1.1.

6.5.6.1.1.4 Test description

6.5.6.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for PCell are shown in Table 6.5.6.1.1.4.1-1. Supported test configurations for NR SCell are shown in Table 6.5.6.1.1.4.1-1A below. Test configuration for NR PCell and test configuration for NR SCell are chosen independently.

Table 6.5.6.1.1.4.1-1: Supported test configurations for NR PCell for NR SA FR1-FR1 DCI-based DL active BWP switch with SCell in non-DRX

Config	Description
6.5.6.1.1-1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
6.5.6.1.1-2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6.5.6.1.1-3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table 6.5.6.1.1.4.1-1A: Supported test configurations for NR SCell for NR SA FR1-FR1 DCI-based DL active BWP switch with SCell in non-DRX

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Configure the test equipment and the DUT according to the parameters in Table 6.5.6.1.1.4.1-2.

Table 6.5.6.1.1.4.1-2: Initial conditions for NR SA FR1-FR1 DCI-based DL active BWP switch in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.

Connection Diagram	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.5.6.1.1.4.1-3.

2. Message contents are defined in clause 6.5.6.1.1.4.3.

3. The test scenario comprises of one NR PCell (Cell 1) and one NR SCell (Cell 2). Cell 1 and Cell 2 are configured according to Annex C.1.2 and C.1.3.

4. By step 4 of the test procedure:

   - UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).
   - UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
   - UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PCell, BWP-0 in Cell 1 before starting the test.
   - UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in SCell.
   - UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-0 in PCell.
   - UE is configured with a bwp-InactivityTimer timer value for SCell.

Table 6.5.6.1.1.4.1-3: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
bwp-InactivityTimer	ms	200	
PDCCH and PDSCH maximum number of HARQ transmission		1	For both PCell and SCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

6.5.6.1.1.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

All cells have constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1. Set the parameters according to Tables 6.5.6.1.1.4.1-3 and 6.5.6.1.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP* of Cell 2. This message also configures 2 different UE-specific bandwidth parts for Cell 2, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to Table 6.5.6.1.1.4.3-2. UE is configured with a *bwp-InactivityTimer* timer value for SCell.

4. The SS shall send a DCI format 1_1 command for SCell DL BWP switch.

5. The UE shall receive the DCI format 1_1 command in SCell's slot # denoted i, then T1 starts and the UE switch its bandwidth part from BWP-1 to BWP-2:

   a) If the UE starts to report valid ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k_1$)

   and

   b) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}$+ Interruption length + k_1)

   and

   c) If the number of consecutive missing ACK/NACK for PCell is no more than 1

   Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

6. If the UE sends valid ACK/NACK for the SCell on BWP-2, T2 starts. During T2, the SS shall not transmit DCI format for PDSCH reception on SCell.

7. T3 starts from the first slot #j of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires and the SS restarts to send DCI format for PDSCH reception on SCell. Then, the UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1:

   a) If the UE starts to report valid ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k_1$)

   and

   b) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}$+ Interruption length + k_1)

   and

   c) If the number of consecutive missing ACK/NACK for PCell is no more than 1.

   Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

8. Repeat steps 4-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

The SS verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The SS verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of SCell, respectively.

Interruption length is defined in TS 38.133 [6] Table 8.2.2.2.5-1-1.

If all subtests pass, the test passes. If one subtest fails, the test fails.

6.5.6.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.6.1.1.4.3-1: Common Exception messages for NR SA FR1-FR1 DCI-based DL active BWP switch in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Table 6.5.6.1.1.4.3-1A: *RRCReconfiguration* (Step 3)

Derivation Path: TS 38.508-1 [14], Table 4.8.1-1B			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 6.5.6.1.1.4.3-1B	
}			
}			
}			
}			

Table 6.5.6.1.1.4.3-1B: *CellGroupConfig* (Table 6.5.6.1.1.4.3-1A)

Derivation Path: TS 38.508-1 [14], Table 4.8.1-2 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig	Table 6.5.6.1.1.4.3-2	
}			
}			
}			

Table 6.5.6.1.1.4.3-2: *ServingCellConfig* (Table 6.5.6.1.1.4.3-1B)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 6.5.6.1.1.4.3-3	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 6.5.6.1.1.4.3-3	

}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
}			

Table 6.5.6.1.1.4.3-3: *BWP-Downlink* (Table 6.5.6.1.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 6.5.6.1.1.4.3-9	
}			
}			
}			

Table 6.5.6.1.1.4.3-4: *Void*

Table 6.5.6.1.1.4.3-5: *Void*

Table 6.5.6.1.1.4.3-6: *PDSCH-TimeDomainResourceAllocationList* (Table 6.5.6.1.1.4.3-9)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	$T_{BWPswitchDelay}$	Defined in Table 6.5.6.1.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	

}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 6.5.6.1.1.4.3-7: Void

Table 6.5.6.1.1.4.3-8: *Void*

Table 6.5.6.1.1.4.3-9: *PDSCH-ConfigCommon* (Table 6.5.6.1.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 6.5.6.1.1.4.3-6	
}			

6.5.6.1.1.5 Test requirements

Tables 6.5.6.1.1.4.1-3 and 6.5.6.1.1.5-1 and 6.5.6.1.1.5-2 define the primary level settings including test tolerances.

Table 6.5.6.1.1.5-1: NR Cell specific test parameters for NR PCell for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.1.2
$BW_{channel}$		RB	Note 7
$BW_{occupied}$	Config 1,2		52 Note 5
	Config 3		106 Note 6
Active BWP ID			0
Initial DL BWP Configuration			DLBWP.0.2Note4
Initial UL BWP Configuration			ULBWP.0.2Note4
Active DL BWP-0 Configuration			DLBWP.0.2Note4
Active DL BWP-1 Configuration			N.A.
Active DL BWP-2 Configuration			N.A.
Active UL BWP-0 Configuration			ULBWP.0.2Note4
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET	Config 1		CCR.1.2 FDD

parameters	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
TRS Configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
OCNG Patterns	Config 1,2		OP.1 Note 5
	Config 3		OP.1 Note 6
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
N_{oc} Note 2		dBm/15KHz	-104
SS-RSRP Note 3	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7: $N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table 6.5.6.1.1.5-2: NR Cell specific test parameters for NR SCell for DL BWP switch in SA

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	$Config_{SCell}$ 1		FDD
	$Config_{SCell}$ 2,3		TDD
TDD configuration	$Config_{SCell}$ 1		Not Applicable
	$Config_{SCell}$ 2		TDDConf.1.1
	$Config_{SCell}$ 3		TDDConf.1.2
$BW_{channel}$			Note 7

$BW_{occupied}$	$Config_{SCell}$ 1,2	RB	52 Note 5
	$Config_{SCell}$ 3		106 Note 6
Active BWP ID			1, 2
Initial DL BWP Configuration			DLBWP.0.2Note4
Initial UL BWP Configuration			N.A.
Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.1Note4
Active DL BWP-2 Configuration			DLBWP.1.3Note4
Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	$Config_{SCell}$ 1		SR.1.1 FDD
	$Config_{SCell}$ 2		SR.1.1 TDD
	$Config_{SCell}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell}$ 1		CR.1.1 FDD
	$Config_{SCell}$ 2		CR.1.1 TDD
	$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell}$ 1		CCR.1.2 FDD
	$Config_{SCell}$ 2		CCR.1.2 TDD
	$Config_{SCell}$ 3		CCR.2.4 TDD
TRS Configuration	$Config_{SCell}$ 1		TRS.1.1 FDD
	$Config_{SCell}$ 2		TRS.1.1 TDD
	$Config_{SCell}$ 3		TRS.1.2 TDD
OCNG Patterns	$Config_{SCell}$ 1,2		OP.1 Note 5
	$Config_{SCell}$ 3		OP.1 Note 6
SSB Configuration	$Config_{SCell}$ 1,2		SSB.1 FR1
	$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc}Note 2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
N_{oc}Note 2		dBm/15KHz	-104
SS-RSRP Note 3	$Config_{SCell}$ 1,2	dBm/SCS	-87
	$Config_{SCell}$ 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io^{Note3}	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and Io is independent of the $BW_{channel}$ configured.
Note 7:	$N_{RB,c}$. is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

During T1, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot (i+$T_{BWPswitchDelay}$+k_1).

During T3, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot (j+$T_{BWPswitchDelay}$+k_1).

Where, k_1 is the timing between DL data receiving and acknowledgement as specified in [9].

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in TS 38.133 [6] Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of PCell interruption during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS 38.133 [6] clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot (i+ $T_{BWPswitchDelay}$+k_1), (j+ $T_{BWPswitchDelay}$+k_1), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

6.5.6.1.2 NR SA FR1 DCI-based DL active BWP switch in non-DRX

6.5.6.1.2.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS 38.133 [6] clause 8.6.

6.5.6.1.2.2 Test applicability

This test applies to all types of NR UE release 15 onwards supporting BWP adaptation of at least 2 BWPs, DCI and timer-based active BWP switching delay Type1 or Type2.

6.5.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.6.1.2.

6.5.6.1.2.4 Test description

6.5.6.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.6.1.2.4.1-1.

Table 6.5.6.1.2.4.1-1: Supported test configurations for NR SA FR1 DCI-based DL active BWP switch in non-DRX

Config	Description
6.5.6.1.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.5.6.1.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.5.6.1.2-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in test case A.6.5.6.1.1 can skip the test cases in A.6.5.6.1.2	

Configure the test equipment and the DUT according to the parameters in Table 6.5.6.1.2.4.1-2.

Table 6.5.6.1.2.4.1-2: Initial conditions for NR SA FR1 DCI-based DL active BWP switch in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.5.6.1.2.4.1-3.

2. Message contents are defined in clause 6.5.6.1.2.4.3.

3. The test scenario comprises of one NR PCell (Cell 1). Cell 1 is configured according to Annex C.1.2 and C.1.3.

4. By step 4 of the test procedure:

   - UE is connected to Cell 1 on radio channel 1.

   - UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

   - UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1.

- UE is configured with a bwp-InactivityTimer timer value for PCell.

Table 6.5.6.1.2.4.1-3: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	200	
PDCCH and PDSCH maximum number of HARQ transmission		1	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

6.5.6.1.2.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

The Cell 1 has constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 6.5.6.1.2.4.1-3 and 6.5.6.1.2.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures 2 different UE-specific bandwidth parts, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to Table 6.5.6.1.2.4.3-2. UE is configured with a bwp-InactivityTimer timer value for PCell.

4. The SS shall send a DCI format 1_1 command for Cell 1 DL BWP switch.

5. The UE shall receive the DCI format 1_1 command in slot # denoted i, then T1 starts and the UE switch its bandwidth part from BWP-1 to BWP-2:

   If the UE starts to report valid ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot (i+$T_{BWPswitchDelay}$+k_1). The number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

6. If the UE sends valid ACK/NACK for the Cell 1 on BWP-2, T2 starts. During T2, the SS shall not transmit DCI format for PDSCH reception on Cell 1.

7. T3 starts from the first slot #j of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires and the SS restarts to send DCI format for PDSCH reception on PCell. Then, the UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part, BWP-1:

   If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot (j+$T_{BWPswitchDelay}$+k_1). The number of successful subtests is increased by one and go to step 8 after T3 expires. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

   8. Repeat steps 4-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

The SS verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

If all subtests pass, the test passes. If one subtest fails, the test fails.

6.5.6.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.6.1.2.4.3-1: Common Exception messages for NR SA FR1 DCI-based DL active BWP switch in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Table 6.5.6.1.2.4.3-1A: *Void*

Table 6.5.6.1.2.4.3-1B: *Void*

Table 6.5.6.1.2.4.3-1C: *RRCReconfiguration* (Step 3)

Derivation Path: TS 38.508-1 [14], Table 4.8.1-1B			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 6.5.6.1.2.4.3-1D	
}			
}			
}			
}			

Table 6.5.6.1.2.4.3-1D: *CellGroupConfig* (Table 6.5.6.1.2.4.3-1C)

Derivation Path: TS 38.508-1 [14], Table 4.8.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 6.5.6.1.2.4.3-2	
}			
}			

Table 6.5.6.1.2.4.3-2: *ServingCellConfig* (Table 6.5.6.1.2.4.3-1D)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 6.5.6.1.2.4.3-3	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 6.5.6.1.2.4.3-3	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			

release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 6.5.6.1.2.4.3-4	
BWP-Uplink[2]	BWP-Uplink with condition BWP2	entry 2 Table 6.5.6.1.2.4.3-4	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 6.5.6.1.2.4.3-3: *BWP-Downlink* (Table 6.5.6.1.2.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 6.5.6.1.2.4.3-8	
}			
}			
}			

Table 6.5.6.1.2.4.3-4: *BWP-Uplink* (Table 6.5.6.1.2.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3	BWP-2	BWP2
}			
}			

Table 6.5.6.1.2.4.3-5: *Void*

Table 6.5.6.1.2.4.3-6: *PDSCH-TimeDomainResourceAllocationList* (Table 6.5.6.1.1.4.3-8)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	$T_{BWPswitchDelay}$	Defined in Table 6.5.6.1.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 6.5.6.1.2.4.3-7: *Void*

Table 6.5.6.1.2.4.3-8: *PDSCH-ConfigCommon* (Table 6.5.6.1.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 6.5.6.1.2.4.3-6	
}			

6.5.6.1.2.5 Test requirements

Tables 6.5.6.1.2.4.1-3 and 6.5.6.1.2.5-1 define the primary level settings including test tolerances.

Table 6.5.6.1.2.5-1: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD

	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52
	Config 2		10 MHz: $N_{RB,c}$ = 52
	Config 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,2,3		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration	Config 1,2,3		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration	Config 1,2,3		DLBWP.1.3 Note 4
Initial UL BWP Configuration	Config 1,2,3		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration	Config 1,2,3		ULBWP.1.1 Note 4
Active UL BWP-2 Configuration	Config 1		N/A
	Config 2,3		ULBWP.1.3 Note 4
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot (i+$T_{BWPswitchDelay}$+k_1).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs right after the beginning of DL slot (j+$T_{BWPswitchDelay}$+k_1).

Where, k_1 is the timing between DL data receiving and acknowledgement as specified in 38.214[9].

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in TS 38.133 [6] Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot (i+ $T_{BWPswitchDelay}$+k_1), (j+ $T_{BWPswitchDelay}$+k_1), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

6.5.6.2 RRC-based active BWP switch

6.5.6.2.0 Minimum conformance requirements

6.5.6.2.0.1 Minimum conformance requirements for RRC-based active BWP switch

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessing\,Delay}+T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot containing the RRC command, and

$T_{RRCprocessing\,Delay}$ is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [13], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs.

The normative reference for this requirement is TS 38.133 [6] clauses 8.6.3.

6.5.6.2.1 NR SA FR1 RRC-based DL active BWP switch in non-DRX

6.5.6.2.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in TS 38.133 [6] clause 8.6.

6.5.6.2.1.2 Test applicability

This test applies to all types of NR UE release 15 onwards supporting BWP adaptation of at least 2 BWPs.

6.5.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.6.2.1.

6.5.6.2.1.4 Test description

6.5.6.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.6.2.1.4.1-1.

Table 6.5.6.2.1.4.1-1: Supported test configurations for NR SA FR1 RRC-based DL active BWP switch in non-DRX

Config	Description
6.5.6.2.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.5.6.2.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.5.6.2.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.5.6.2.1.4.1-2.

Table 6.5.6.2.1.4.1-2: Initial conditions for NR SA FR1 RRC-based DL active BWP switch in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.5.6.2.1.4.1-3.
2. Message contents are defined in clause 6.5.6.2.1.4.3.
3. The test scenario comprises of one NR Cell (Cell 1). Cell 1 is configured according to Annex C.1.2 and C.1.3.
4. By step 4 of the test procedure:
   - UE is connected to Cell 1 on radio channel 1.
   - UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
   - UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 of initial condition in Cell

Table 6.5.6.2.1.4.1-3: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
PDCCH and PDSCH maximum number of HARQ transmission		1	
T1	s	0.2	

6.5.6.2.1.4.2 Test procedure

The test consists of 1 time period, with duration of T1.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Cell 1 has constant signal level throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Tables 6.5.6.2.1.4.1-3 and 6.5.6.2.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.
3. The SS shall send an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures another UE-specific bandwidth part, BWP-1 and indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to the initial condition of Active BWP-1 in Table 6.5.6.2.1.5-1.
4. The UE shall transmit an *RRCReconfigurationComplete* message.
5. The SS shall send an *RRCReconfiguration* message with updated bandwidth part configuration for DL BWP switch, change the BWP according to the final condition of Active BWP-1 in Table 6.5.6.2.1.5-1. T1 starts.
6. The UE shall receive the *RRCReconfiguration* in PCell's slot # denoted i and reconfigure its bandwidth part with the updated bandwidth part configuration.
7 If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot i + X + k1 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one. Where:

   - X = 16 for test configuration 6.5.6.2.1-1 and 6.5.6.2.1-2

   - X = 32 for test configuration 6.5.6.2.1-3.
8. After the SS receives the ACK/NACK in step 7) or when T1 expires, the SS shall transmit *RRCRelease* message to release the RRC connection.
9. After the RRC connection release, the SS:

   -transmits in NR Cell 1 a Paging message for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   or
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

The SS verifies the DL BWP switch time in PCell by counting the slots from the time when the RRC Reconfiguration message including updated BWP configuration is sent till a valid ACK/NACK is received.

6.5.6.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.6.2.1.4.3-1: Common Exception messages for NR SA FR1 RRC-based DL active BWP switch in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Table 6.5.6.2.1.4.3-1A: *Void*

Table 6.5.6.2.1.4.3-1B: *Void*

Table 6.5.6.2.1.4.3-1C: *RRCReconfiguration* (1, Step 3, Step 5)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
radioBearerConfig	Not present		
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 6.5.6.2.1.4.3-1D	
dedicatedNAS-MessageList	Not present		
}			
}			
}			
}			

Table 6.5.6.2.1.4.3-1D: *CellGroupConfig* (Table 6.5.6.2.1.4.3-1C)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 6.5.6.2.1.4.3-1E	
}			
}			

Table 6.5.6.2.1.4.3-1E: *ServingCellConfig* (Table 6.5.6.2.1.4.3-1D)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1] SEQUENCE {	BWP-Downlink	entry 1 Table 6.5.6.2.1.4.3-1F	
}			
firstActiveDownlinkBWP-Id	1	BWP-1	
defaultDownlinkBWP-Id	1	BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			

release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 6.5.6.2.1.4.3-1G	
}			
firstActiveUplinkBWP-Id	1	BWP-1	
}			
}			

Table 6.5.6.2.1.4.3-1F: *BWP-Downlink* (Table 6.5.6.2.1.4.3-1E)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 5
}			
}			

Table 6.5.6.2.1.4.3-1G: *BWP-Uplink* (Table 6.5.6.2.1.4.3-1E)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 5
}			
}			

Table 6.5.6.2.1.4.3-2: *Void*

6.5.6.2.1.5 Test requirements

Tables 6.5.6.2.1.4.1-3 and 6.5.6.2.1.5-1 define the primary level settings including test tolerances.

Table 6.5.6.2.1.5-1: NR Cell specific test parameters for DL BWP switch

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1

		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1		10 MHz: $N_{RB,c}$ = 52
		Config 2		10 MHz: $N_{RB,c}$ = 52
		Config 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID				1
Initial DL BWP Configuration		Config 1,2,3		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2,3		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1,2,3		DLBWP.1.3
	Active UL BWP-1 Configuration	Config 1,2,3		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1,2,3		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1,2,3		ULBWP.1.1
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR.2.1 TDD
RMSI CORESET parameters		Config 1		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET parameters		Config 1		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.3 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2		SSB.1 FR1
		Config 3		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS(Note 1)				
N_{oc} Note 2		Config 1,2	dBm/SCS	-104
		Config 3		-101
SS-RSRP Note 3		Config 1,2	dBm/SCS	-87
		Config 3		-84
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
Io Note3		Config 1,2	dBm/ 9.36MHz	-58.96
		Config 3	dBm/ 38.16MHz	-52.86

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].

During T1, the UE shall be ready for the reception of uplink grant for Cell from the first DL slot that occurs right after the beginning of slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1$.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [12].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

6.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

6.5.6.3.0 Minimum conformance requirements

6.5.6.3.0.1 Minimum conformance requirements for Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

The minimum requirements given in clause 4.5.6.3.0.1 applies.

6.5.6.3.1 NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA

Editor's note: This test case is incomplete in following aspects:

- TT analysis is missing,
- Test parameters are still in brackets.

6.5.6.3.1.1 Test purpose

To verify the requirement of DL BWP switch delay on multiple CCs in TS 38.133 [6] clause 8.6.2A.1, and interruption requirement for NR victim cell, defined in 38.133 [6] clause 8.2.

6.5.6.3.1.2 Test applicability

This test applies to all types of NR UE release 16 onwards, supporting incremental delay for DCI and timer based active BWP switching on multiple CCs simultaneously and 3DL CA.

6.5.6.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.6.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.6.3.1.

6.5.6.3.1.4 Test description

6.5.6.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. Supported test configurations for NR PCell is shown in Table 6.5.6.3.1.4.1-1. Supported test configurations for NR SCells are shown in Table 6.5.6.3.1.4.1-2. Test configuration for NR PCell and test configuration for NR SCells are chosen independently.

Table 6.5.6.3.1.4.1-1: Supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations. NOTE 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration.	

Table 6.5.6.3.1.4.1-2: Supported test configurations for NR SCells

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration Note 3: Test configurations of two NR SCells are selected independently.	

Configure the test equipment and the DUT according to the parameters in Table 6.5.6.3.1.4.1-3.

Table 6.5.6.3.1.4.1-3: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.5.6.3.1.4.1-4.

2. Message contents are defined in clause 6.5.6.3.1.4.3.

3. The test scenario comprises of one NR PCell (Cell 1) and two NR SCells (Cell 2 and Cell 3). The power levels and settings for Cell 1, Cell 2 and Cell 3 are configured according to clause C.1.2 and C.1.3.

4. By step 4 of the test procedure:

- UE is connected to Cell 1 (NR PCell) on radio channel 1 (PCC), Cell 2 (SCell) on radio channel 2 (SCC #1) and Cell 3 (SCell) on radio channel 3 (SCC #2).

- UE is configured with 2 different UE-specific downlink bandwidth parts for Cell 1, BWP-1 and BWP-2, before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

- UE is configured with 2 different UE-specific downlink bandwidth parts for Cell 2, BWP-1 and BWP-2, before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

- UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for SCell (Cell 3). BWP-0 includes the bandwidth of the initial DL BWP and SSB.

- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell and SCell (Cell 2).

- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in SCell (Cell 3).

- UE is configured with a bwp-InactivityTimer timer value for PCell and SCell (Cell 2).

Table 6.5.6.3.1.4.1-4: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2,3	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
bwp-InactivityTimer	ms	200	For both PSCell and SCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for Cell 1 on SCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for Cell 2 on SCC.
Cell2 and Cell 3 timing offset to cell1	µs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

6.5.6.3.1.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively. All cells have constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR* , Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. NR Cell 2 and Cell 3 are added as the SCells and activated.

2. Set the parameters according to Tables 6.5.6.3.1.4.1-4, Table 6.5.6.3.1.5-1 and Table 6.5.6.3.1.5-2. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP* of NR Cell 1 and NR Cell 2. This message also configures 2 different UE-specific bandwidth parts, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB for NR Cell 1 and NR Cell 2. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to Table 6.5.6.3.1.4.3-2. UE is configured with a *bwp-InactivityTimer* timer value for PCell (Cell 1) and SCell (Cell 2).

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. PDCCHs indicating new transmissions shall be sent continuously on NR PCell (Cell 1), SCell (Cell 2) and SCell (Cell 3) to ensure that the UE will have ACK/NACK sending.

6. The SS shall send a DCI format 1_1 command on PCell (Cell 1) to trigger PCell DL BWP switch and a DCI format 1_1 command on SCell (Cell 2) to trigger SCell DL BWP switch. Two DCI format 1_1 commands should be sent in the same slot.

7. T1 starts from the end of the slot (denote as slot #i) in which the UE receives the DCI format 1_1 commands in PCell and SCell (Cell 2), then the UE shall switch its bandwidth part from BWP-1 to BWP-2.

   If the SS observes that,

   a) the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot ($i+T_{MultipleBWPswitchDelay}+k_1$); and

   b) the UE starts to report valid ACK/NACK for SCell (Cell 2) from the first UL slot that occurs after the beginning of the DL slot ($i+T_{MultipleBWPswitchDelay}+k_1$); and

c) the number of consecutive missing ACK/NACK for SCell (Cell 3) is no more than 1; and

d) no missing ACK/NACK for SCell (Cell 3) is observed from the first UL subframe that occurs after the beginning of the DL slot (i+$T_{MultipleBWPswitchDelay}$+$k_1$).

then count a success for the event “DCI based BWP switch” and go to step 8, otherwise count a fail for the event “DCI based BWP switch”, switch off/on the UE and go to step 1.

8. T2 starts when the SS receives valid ACK/NACK for the PCell and SCell (Cell 2) on BWP-2. The SS stops sending PDCCHs scheduling new transmissions on PCell and SCell (Cell 2).

9. T3 starts from the first slot (denoted as slot #j) of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires and the SS restarts to send PDCCHs scheduling new transmissions on PCell and SCell (Cell 2). Then, the UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part - BWP-1 on PCell and SCell (Cell 2).

   If the SS observes that,

   a) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot (j+ $T_{MultipleBWPswitchDelay}$ +k_1); and

   b) If the UE starts to report valid ACK/NACK for SCell (Cell 2) from the first UL slot that occurs after the beginning of the DL slot (j+ $T_{MultipleBWPswitchDelay}$ +k_1); and

   c) If the number of consecutive missing ACK/NACK for SCell (Cell 3) is no more than 1; and

   d) no missing ACK/NACK for SCell (Cell 3) is observed from the first UL subframe that occurs after the beginning of the DL slot (j+$T_{MultipleBWPswitchDelay}$+$k_1$).

   then count a success for the event “Timer based BWP switch” and go to step 10. Otherwise, count a fail for the event “Timer based BWP switch”, switch off/on the UE and go to step 1.

10. Repeat steps 5-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved. Each of the events "DCI based BWP switch" and "Timer based BWP switch" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

6.5.6.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.6.3.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	

Table 6.5.6.3.1.4.3-2: *RRCReconfiguration* (Test procedure, step3)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 6.5.6.3.1.4.3-3	
}			
}			
}			
}			

Table 6.5.6.3.1.4.3-3: *CellGroupConfig* (Table 6.5.6.3.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
spCellConfigDedicated	ServingCellConfig	Table 6.5.6.3.1.4.3-4	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		Entry 1	
sCellIndex	ServCellIndex of NR SCell (Cell 2)		
sCellConfigDedicated	ServingCellConfig	Table 6.5.6.3.1.4.3-4	
}			
}			
}			

Table 6.5.6.3.1.4.3-4: *ServingCellConfig* (Table 6.5.6.3.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 6.5.6.3.1.4.3-5	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 6.5.6.3.1.4.3-5	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 6.5.6.3.1.4.3-6	

BWP-Uplink[2]	BWP-Uplink with condition BWP2	entry 2 Table 6.5.6.3.1.4.3-6	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 6.5.6.3.1.4.3-5: *BWP-Downlink* (Table 6.5.6.3.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 6.5.6.3.1.4.3-7	
}			
}			
}			

Table 6.5.6.3.1.4.3-6: BWP-Uplink (Table 6.5.6.3.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3	BWP-2	BWP2
}			
}			

Table 6.5.6.3.1.4.3-7: PDSCH-ConfigCommon (Table 6.5.6.3.1.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 6.5.6.3.1.4.3-8	
}			

Table 6.5.6.3.1.4.3-8: PDSCH-TimeDomainResourceAllocationList (Table 6.5.6.3.1.4.3-7)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	$T_{BWPswitchDelay}$	Defined in Table 6.5.6.3.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

6.5.6.3.1.5 Test requirements

Tables 6.5.6.3.1.4.1-4, 6.5.6.3.1.5-1, 6.5.6.3.1.5-2 and 6.5.6.3.1.5-3 define the primary level settings including test tolerances.

Table 6.5.6.3.1.5-1: NR Cell specific test parameters for PCell (NR Cell 1)

Parameter		**Unit**	**Cell 1**
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1,2		10 MHz: $N_{RB,c}$ = 52
	Config 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1, 2
Initial DL BWP Configuration			DLBWP.0.2 Note4
Initial UL BWP Configuration			ULBWP.0.2 Note4
Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.1 Note4
Active DL BWP-2 Configuration			DLBWP.1.3 Note4
Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			ULBWP.1.1 Note4
Active UL BWP-2 Configuration			ULBWP.1.3 Note4
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD

RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
N_{oc} Note 2		dBm/15KHz	-104
SS-RSRP Note 3	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table 6.5.6.3.1.5-2: NR Cell specific test parameters for SCell (NR Cell 2)

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	$Config_{SCell2}$ 1		FDD
	$Config_{SCell2}$ 2,3		TDD
TDD configuration	$Config_{SCell2}$ 1		Not Applicable
	$Config_{SCell2}$ 2		TDDConf.1.1
	$Config_{SCell2}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell2}$ 1,2		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell2}$ 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1, 2
Initial DL BWP Configuration			DLBWP.0.2 Note4
Initial UL BWP Configuration			ULBWP.0.2 Note4
Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.1 Note4
Active DL BWP-2 Configuration			DLBWP.1.3 Note4

Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			ULBWP.1.1[Note4]
Active UL BWP-2 Configuration			ULBWP.1.3[Note4]
PDSCH Reference measurement channel	$Config_{SCell2}$ 1		SR.1.1 FDD
	$Config_{SCell2}$ 2		SR.1.1 TDD
	$Config_{SCell2}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell2}$ 1		CR.1.1 FDD
	$Config_{SCell2}$ 2		CR.1.1 TDD
	$Config_{SCell2}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell2}$ 1		CCR.1.1 FDD
	$Config_{SCell2}$ 2		CCR.1.1 TDD
	$Config_{SCell2}$ 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	$Config_{SCell2}$ 1,2		SSB.1 FR1
	$Config_{SCell2}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc}[Note 2]	$Config_{SCell2}$ 1,2	dBm/SCS	-104
	$Config_{SCell2}$ 3		-101
N_{oc}[Note 2]		dBm/15KHz	-104
SS-RSRP [Note 3]	$Config_{SCell2}$ 1,2	dBm/SCS	-87
	$Config_{SCell2}$ 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io[Note3]	$Config_{SCell2}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell2}$ 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table 6.5.6.3.1.5-3: NR Cell specific test parameters for SCell (NR Cell 3)

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	$Config_{SCell3}$ 1		FDD
	$Config_{SCell3}$ 2,3		TDD
TDD configuration	$Config_{SCell3}$ 1		Not Applicable
	$Config_{SCell3}$ 2		TDDConf.1.1
	$Config_{SCell3}$ 3		TDDConf.2.1
$BW_{channel}$	$Config_{SCell3}$ 1,2		10 MHz: $N_{RB,c}$ = 52
	$Config_{SCell3}$ 3		40 MHz: $N_{RB,c}$ = 106

Active BWP ID			0
Initial DL BWP Configuration			DLBWP.0.2[Note4]
Initial UL BWP Configuration			ULBWP.0.2[Note4]
Active DL BWP-0 Configuration			DLBWP.0.2[Note4]
Active DL BWP-1 Configuration			N.A.
Active DL BWP-2 Configuration			N.A.
Active UL BWP-0 Configuration			ULBWP.0.2[Note4]
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	$Config_{SCell3}$ 1		SR.1.1 FDD
	$Config_{SCell3}$ 2		SR.1.1 TDD
	$Config_{SCell3}$ 3		SR.2.1 TDD
RMSI CORESET parameters	$Config_{SCell3}$ 1		CR.1.1 FDD
	$Config_{SCell3}$ 2		CR.1.1 TDD
	$Config_{SCell3}$ 3		CR.2.1 TDD
Dedicated CORESET parameters	$Config_{SCell3}$ 1		CCR.1.1 FDD
	$Config_{SCell3}$ 2		CCR.1.1 TDD
	$Config_{SCell3}$ 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	$Config_{SCell3}$ 1,2		SSB.1 FR1
	$Config_{SCell3}$ 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc}[Note 2]	$Config_{SCell3}$ 1,2	dBm/SCS	-104
	$Config_{SCell3}$ 3		-101
N_{oc}[Note 2]		dBm/15KHz	-104
SS-RSRP[Note 3]	$Config_{SCell3}$ 1,2	dBm/SCS	-87
	$Config_{SCell3}$ 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io[Note3]	$Config_{SCell3}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell3}$ 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

During T1, the UE shall start to send the ACK/NACK for PCell and SCell (Cell 2) from the first UL slot that occurs after the beginning of DL slot (i+$T_{MultipleBWPswitchDelay}$+$k_1$).

During T3, the UE shall start to send the ACK/NACK for PCell and SCell (Cell 2) from the first UL slot that occurs after the beginning of DL slot (j+$T_{MultipleBWPswitchDelay}$+$k_1$).

Where,

k_1 is the timing between PDSCHs on PCell and SCell (Cell 2) and their corresponding acknowledgement as specified in 38.214 [9].

$T_{MultipleBWPswitchDelay} = T_{BWPswitchDelay} + D$, is the simultaneous BWP switching delay on multiple CCs specified in TS 38.133 [6] clause 8.6.2A.1.

$T_{BWPswitchDelay}$ is the BWP switching delay on single CC defined in 38.133 [6] Table 8.6.2-1 and depends on UE capability *bwp-SwitchingDelay* [13].

D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability *bwp-SwitchingMultiCCs-r16* [13].

All of the above test requirements shall be fulfilled in order for the observed PCell and SCell (Cell 2) active BWP switch delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of SCell (Cell 3) interruption during PCell and SCell active BWP switch shall not happen outside the BWP switch delay and the interruption of SCell (Cell 3) shall not be longer than the interruption duration specified for active BWP switch in TS 38.133 [6] clause 8.2.2.2.5.

During T3, the start time of SCell (Cell 3) interruption of during PCell and SCell active BWP switch shall not happen outside the BWP switch delay and the interruption of SCell (Cell 3) shall not be longer than the interruption duration specified for active BWP switch in TS 38.133 [6] clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed SCell (Cell 3) active BWP switch interruption to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot (i+ $T_{BWPswitchDelay}$+k_1), (j+ $T_{BWPswitchDelay}$+k_1), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

6.5.6.4

6.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs

6.5.6.5.0 Minimum conformance requirements

6.5.6.5.0.1 Minimum conformance requirements for Simultaneous RRC-based Active BWP Switch on multiple CCs

The minimum requirements given in clause 6.5.6.5.0.1 applies.

6.5.6.5.1 NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA

Editor's note: This test case is incomplete in following aspects:

- TT analysis is missing,
- Test parameters are still in brackets.

6.5.6.5.1.1 Test purpose

To verify the DL BWP switch delay requirement on multiple CCs for RRC-based BWP switch defined in 38.133 [6] clause 8.6.3A.1.

6.5.6.5.1.2 Test applicability

This test applies to all types of NR UE release 16 onwards, supporting incremental delay for DCI and timer based active BWP switching on multiple CCs simultaneously and 2DL CA.

6.5.6.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.6.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.6.5.1.

6.5.6.5.1.4 Test description

6.5.6.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. Supported test configurations for PCell are shown in Table 6.5.6.5.1.4.1-1. Supported test configurations for NR SCell are shown in Table 6.5.6.5.1.4.1-2. Test configuration for NR PCell and test configuration for NR SCell are chosen independently.

Table 6.5.6.5.1.4.1-1: Supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Table 6.5.6.5.1.4.1-2: Supported test configurations for NR SCell

$Config_{SCell}$	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration	

Configure the test equipment and the DUT according to the parameters in Table 6.5.6.5.1.4.1-3.

Table 6.5.6.5.1.4.1-3: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.6.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.5.6.5.1.4.1-4.

2. Message contents are defined in clause 6.5.6.5.1.4.3.

3. The test scenario comprises of one NR PCell (Cell 1) and one NR SCell (Cell 2). The power levels and settings for Cell 2 and Cell 3 are configured according to clause C.1.2 and C.1.3.

4. By step 4 of the test procedure:

   - UE is connected to Cell 1 (NR PCell) on radio channel 1 (PCC) and Cell 2 (SCell) on radio channel 2 (SCC).

   - UE has dedicated bandwidth part BWP-1 in its RRC configuration for PCell (Cell 1) and SCell (Cell 2)

   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell (Cell 1) and SCell (Cell 2).

Table 6.5.6.5.1.4.1-4: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell (Cell 2)
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cell on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cell on SCC.
Cell 2 timing offset to Cell 1	µs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	[0.2]	

6.5.6.5.1.4.2 Test procedure

The test consists of 1 time periods with durations of T1. All cells have constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. NR Cell 2 is added as the SCell and activated.

2. Set the parameters according to Tables 6.5.6.5.1.4.1-4, Table 6.5.6.5.1.5-1 and Table 6.5.6.5.1.5-2. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall send an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP* on NR Cell 1 and NR Cell 2. This message also configures another UE-specific bandwidth part, BWP-1, and indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to the initial condition of Active BWP-1 in Table 6.5.6.5.1.5-1 and Table 6.5.6.5.1.5-2 for NR Cell 1 and NR Cell 2, respectively.

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and SCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

6. The SS shall send an *RRCReconfiguration* message with updated bandwidth part configuration for PCell and SCell DL BWP switch, changing the BWP according to the final condition of Active BWP-1 in Table 4.5.6.2.1.5-1 and Table 6.5.6.5.1.5-2.

7. T1 starts from the end of the slot (denote as slot #i) in which the UE receives the RRC message reconfiguring PCell and SCell BWP, then it reconfigures its bandwidth part with the updated bandwidth part configuration.

   If the SS observes that,

   a) the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{\text{NR slot length}} + k_1)$; and

   b) the UE starts to report valid ACK/NACK for SCell from the first UL slot that occurs after the beginning of the DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{\text{NR slot length}} + k_1)$,

   then count a success for the test, otherwise count a fail for the test.

8. After the SS receives the ACK/NACK in step 7) or when T1 expires, the SS shall transmit *RRCRelease* message to release the RRC connection.

9. After the RRC connection release, the SS:

   - transmits in NR Cell 1 a Paging message for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED

with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5), NR Cell 2 is added as the SCell and activated,

or

- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5. NR Cell 2 is added as the SCell and activated.

10. Repeat steps 3-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.6.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.6.5.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	

Table 6.5.6.5.1.4.3-2: *RRCReconfiguration* (Test procedure, step3 and step 6)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
radioBearerConfig	Not present		
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 6.5.6.5.1.4.3-3	
dedicatedNAS-MessageList	Not present		
}			
}			
}			
}			

Table 6.5.6.5.1.4.3-3: *CellGroupConfig* (Table 6.5.6.5.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PSCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
spCellConfigDedicated	ServingCellConfig	Table 6.5.6.5.1.4.3-4	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		Entry 1	
sCellIndex	ServCellIndex of NR SCell		
sCellConfigDedicated	ServingCellConfig	Table 6.5.6.5.1.4.3-4	
}			
}			
}			

Table 6.5.6.5.1.4.3-4: *ServingCellConfig* (Table 6.5.6.5.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	1 entry		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 6.5.6.5.1.4.3-5	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	1 entry		
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 6.5.6.5.1.4.3-6	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 6.5.6.5.1.4.3-5: *BWP-Downlink* (Table 6.5.6.5.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 6
}			
}			

Table 6.5.6.5.1.4.3-6: BWP-Uplink (Table 6.5.6.5.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			

bwp-Id	1	BWP-1	
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 6
}			
}			

6.5.6.5.1.5 Test requirements

Tables 6.5.6.5.1.4.1-4, 6.5.6.5.1.5-1 and 6.5.6.5.1.5-2 define the primary level settings including test tolerances.

Table 6.5.6.5.1.5-1: NR Cell specific test parameters for PSCell (NR Cell 1)

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
TDD configuration		Config 1		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1,2		10 MHz: $N_{RB,c}$ = 52
		Config 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID				1
Initial DL BWP Configuration				DLBWP.0.2 Note4
Initial UL BWP Configuration				ULBWP.0.2 Note4
Initial Condition	Active DL BWP-1 Configuration			DLBWP.1.3 Note4
	Active UL BWP-1 Configuration			ULBWP.1.3 Note4
Final Condition	Active DL BWP-1 Configuration			DLBWP.1.1 Note4
	Active UL BWP-1 Configuration			ULBWP.1.1 Note4
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR.2.1 TDD
RMSI CORESET parameters		Config 1		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET parameters		Config 1		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2		SSB.1 FR1
		Config 3		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
Correlation Matrix and Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		Config 1,2	dBm/SCS	-104

	Config 3		-101
SS-RSRP Note 3	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

Table 6.5.6.5.1.5-2: NR Cell specific test parameters for SCell (NR Cell 2)

Parameter			Unit	Cell 2
Frequency Range				FR1
Duplex mode		$Config_{SCell}$ 1		FDD
		$Config_{SCell}$ 2,3		TDD
TDD configuration		$Config_{SCell}$ 1		Not Applicable
		$Config_{SCell}$ 2		TDDConf.1.1
		$Config_{SCell}$ 3		TDDConf.2.1
$BW_{channel}$		$Config_{SCell}$ 1,2		10 MHz: $N_{RB,c}$ = 52
		$Config_{SCell}$ 3		40 MHz: $N_{RB,c}$ = 106
Active BWP ID				1
Initial DL BWP Configuration				DLBWP.0.2 Note4
Initial UL BWP Configuration				ULBWP.0.2 Note4
Initial Condition	Active DL BWP-1 Configuration			DLBWP.1.3 Note4
	Active UL BWP-1 Configuration			ULBWP.1.3 Note4
Final Condition	Active DL BWP-1 Configuration			DLBWP.1.1 Note4
	Active UL BWP-1 Configuration			ULBWP.1.1 Note4
PDSCH Reference measurement channel		$Config_{SCell}$ 1		SR.1.1 FDD
		$Config_{SCell}$ 2		SR.1.1 TDD
		$Config_{SCell}$ 3		SR.2.1 TDD
RMSI CORESET parameters		$Config_{SCell}$ 1		CR.1.1 FDD
		$Config_{SCell}$ 2		CR.1.1 TDD
		$Config_{SCell}$ 3		CR.2.1 TDD
Dedicated CORESET parameters		$Config_{SCell}$ 1		CCR.1.1 FDD
		$Config_{SCell}$ 2		CCR.1.1 TDD
		$Config_{SCell}$ 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		$Config_{SCell}$ 1,2		SSB.1 FR1
		$Config_{SCell}$ 3		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		$Config_{SCell}$ 1		TRS.1.1 FDD
		$Config_{SCell}$ 2		TRS.1.1 TDD
		$Config_{SCell}$ 3		TRS.1.2 TDD
Correlation Matrix and Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				

EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	$Config_{SCell}$ 1,2	dBm/SCS	-104
	$Config_{SCell}$ 3		-101
SS-RSRP Note 3	$Config_{SCell}$ 1,2	dBm/SCS	-87
	$Config_{SCell}$ 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	$Config_{SCell}$ 1,2	dBm/ 9.36MHz	-58.96
	$Config_{SCell}$ 3	dBm/ 38.16MHz	-52.86
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

During T1, the UE shall start to send the ACK/NACK for PCell and SCell from the first UL slot that occurs after the beginning of DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{\text{NR slot length}} + k_1)$.

Where,

k_1 is the timing between PDSCHs on PCell and SCell and their corresponding acknowledgement as specified in 38.214 [9].

$T_{RRCprocessingDelay} = 10$ ms, is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [13],

$T_{BWPswitchDelayRRC} = 6$ ms, is the time used by the UE to perform BWP switch as defined in 38.133 [6] clause 8.6.3,

$D_{RRC} = 0$ if the UE is capable of type 1 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [11]. $D_{RRC} = D$ for UE which is capable of type 2 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [2]

D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability *bwp-SwitchingMultiCCs-r16* [13].

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

6.5.7 DL interruptions at switching between two uplink carriers

6.5.7.0 Minimum conformance requirements

The DL interruption requirements at dynamic switching between two uplink carriers specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration when the capability *uplinkTxSwitchingPeriod* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [9], where NR uplink carrier 1 is capable of one transmit antenna connector and NR uplink carrier 2 is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

When dynamic switching between two uplink carriers is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [13]. The DL

interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR carrier 1 or carrier 2 as indicated in RRC signalling [13]. The DL interruption lengths of X are defined in Table 6.5.7.0-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [2].

Table 6.5.7.0-1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14
Note 1: Uplink Tx switching period depends on UE capability *uplinkTxSwitchingPeriod*				

The normative reference for this requirement is TS 38.133 [6] clauses 8.2.2.2.10.

6.5.7.1 NR SA FR1 DL Interruptions at switching between two uplink carriers in FDD-TDD CA

6.5.7.1.1 Test purpose

The purpose of this test is to verify the DL interruption requirements during UE dynamic switching between two uplink carriers.

6.5.7.1.2 Test applicability

This test applies to all types of NR UE release 16 onwards, configured with *uplinkTxSwitchingPeriod*.

6.5.7.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.7.1

6.5.7.1.4 Test description

6.5.7.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7.1.4.1-1.

Table 6.5.7.1.4.1-1: Supported test configurations

Config	Description
6.5.7.1-1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7.1.4.1-2.

Table 6.5.7.1.4.1-2: Initial conditions for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.

Connection Diagram	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part. - Without LTE link - Without Faders		

1. The general test parameter settings are set up according to Table 6.5.7.1.4.1-3.

2. Message contents are defined in clause 6.5.7.1.4.3.

3. The test scenario comprises of two NR Cells (Cell 1 and Cell 2). Cell 1 is configured according to Annex C.1.2 and C.1.3.

Table 6.5.7.1.4.1-3: General test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

6.5.7.1.4.2 Test procedure

The test consists of two active NR cells: Cell1 (PCell) and Cell2 (SCell). The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell1 and Cell2 and the RRC message including *uplinkTxSwitching* is received at the UE antenna connector.

UE is configured to transmit SRS on both PCell and SCell on the last 2 symbols of special slot. DL interruption is expected to take place prior to the SRS symbols.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure PCell (Cell1) and SCell (Cell2) according to Table 6.5.7.1.5-1. Propagation conditions are set according to Annex C clause C.2.2.

3. The SS shall transmit an RRCReconfiguration message to configure PCell (Cell1) and SCell (Cell2) as per TS 38.508-1 [7] clause 7 with the message content exceptions defined in clause 6.5.7.1.4.3. *UplinkTxSwitching* is configured to the UE.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. Set the parameters according to T1 in Tables 6.5.7.1.5-1. T1 starts.

6. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB on following symbol on PCell and SCell:

   For PCell (Cell1), on the following symbol in the slot overlapping with the 1st special slot of every radio frame of the NR TDD carrier (Cell 2)

   - symbol#12 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

- otherwise,
  - symbol #8 if UE capability uplinkTxSwitchingPeriod is 210us or
  - symbol #9 if UE capability uplinkTxSwitchingPeriod is 140us or
  - symbol #10 if UE capability uplinkTxSwitchingPeriod is 35us.

For SCell(Cell2) , on the following symbol in the 2nd special slot of every radio frame

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
- otherwise,
  - symbol #4 if UE capability uplinkTxSwitchingPeriod is 210us or
  - symbol #5 if UE capability uplinkTxSwitchingPeriod is 140us or
  - symbol #8 if UE capability uplinkTxSwitchingPeriod is 35us.

7. After SS transmits the DCI trigger, the UE shall send L1-RSRP report containing valid L1-RSRP report for Cell 1 and Cell 2 while meeting the test requirements in Table 6.5.7.1.5-3, if so increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.
8. SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5),

   or

   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
9. Repeat step 3-8 until a test verdict has been achieved.

6.5.7.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.7.1.4.3-1: Common Exception messages for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-1 with condition 1T-2T
Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 1T-2T and PCELL Table H.3.11-4 with condition FDD and SwitchFrom Table H.3.11-5 with condition FDD-TDD and SwitchFrom
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 1T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition FDD-TDD and SwitchTo Table H.3.11-11

Table 6.5.7.1.4.3-2 - Table 6.5.7.1.4.3-9: Void

Table 6.5.7.1.4.3-10: Physical layer parameters for DCI format 0_1 (Test procedure, step 6, Cell 1 and Cell 2)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

6.5.7.1.5 Test requirements

Table 6.5.7.1.5-1 defines the primary level settings including test tolerances for DL interruptions at switching between two uplink carriers in FDD-TDD CA.

Table 6.5.7.1.5-1: Cell specific test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter		Unit	Cell1	Cell2
Frequency Range			FR1	FR1
Duplex mode	Config 1		FDD	TDD
TDD configuration	Config 1		N/A	TDDConf.2.1 except that: S='11DL:1GP:2UL'; *nrofDownlinkSymbols:11 nrofUplinkSymbols: 2*
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRS configuration in Table 4.4.1.1.5-2 is applied except that: resourceMappingstartPosition: 0resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl10,6	SRS configuration in Table 4.4.1.1.5-2 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		dBm/15 kHz	-104	-104
SS-RSRP Note 3		dBm/ SSB SCS	-87	-87
CSI-RS RSRP Note6		dBm/SCS	-81	-81
$\hat{E}_s/I_{ot}$		dB	17	14
$\hat{E}_s/N_{oc}$		dB	17	14
N_{oc} Note 2	Config 1	dBm/SCS	-104	-101
Io Note3 on symbols without CSI-RS	Config 1	dBm/9.36 MHz	-58.96	-
		dBm/ 38.16MHz	-	-55.78

Io[Note6] on symbols with CSI-RS	Config 1	dBm/9.36 MHz	-56.58	-
		dBm/ 38.16MHz	-	-53.43
Time offset to Cell1 [Note 5]		µs	-	0
Propagation Condition			AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in TS 38.133 clause 10.1.19.2.

The DL interruption lengths of X are defined in Table 6.5.7.1.5-2

Table 6.5.7.1.5-2: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period [Note1]		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14

Note 1: Uplink Tx switching period depends on UE capability *uplinkTxSwitchingPeriod*

The UE shall send L1-RSRP report for Cell 1 and Cell 2 after the reception of corresponding DCI trigger. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7.1.5-3.

Table 6.5.7.1.5-3: L1-RSRP absolute accuracy requirements for the reported valuesof CSI-RS

Normal Conditions	T1
Lowest reported value (CSI-RS#0)	65
Highest reported value (CSI-RS#0)	86

Table 6.5.7.1.5-4: Void

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.7.2 NR SA FR1 DL Interruptions at switching between two uplink carriers in TDD-TDD CA

6.5.7.2.1 Test purpose

The purpose of this test is to verify the DL interruption requirements during UE dynamic switching between two uplink carriers.

6.5.7.2.2 Test applicability

This test applies to all types of NR UE release 16 onwards, configured with *uplinkTxSwitchingPeriod*.

6.5.7.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.7.2

6.5.7.2.4 Test description

6.5.7.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7.2.4.1-1.

Table 6.5.7.2.4.1-1: Supported test configurations

Config	Description
6.5.7.2-1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7.2.4.1-2.

Table 6.5.7.2.4.1-2: Initial conditions for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part. - Without LTE link - Without Faders		

1. The general test parameter settings are set up according to Table 6.5.7.2.4.1-3.
2. Message contents are defined in clause 6.5.7.2.4.3.
3. The test scenario comprises of one NR Cell (Cell 1). Cell 1 is configured according to Annex C.1.2 and C.1.3.

Table 6.5.7.2.4.1-3: General test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

6.5.7.2.4.2 Test procedure

Same as in 6.5.7.1.4.2 with the following exception in step 6.

6. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB on following symbol on the special slot on PCell and SCell:

   For PCell (Cell 1), on the following symbol in the 1st special slot of every even radio frame:

   - symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
   - otherwise,
     - symbol #4 if UE capability uplinkTxSwitchingPeriod is 210us or
     - symbol #5 if UE capability uplinkTxSwitchingPeriod is 140us or
     - symbol #8 if UE capability uplinkTxSwitchingPeriod is 35us.

   For SCell (Cell 2), on the following symbol on the 2nd special slot of every even radio frame:

   - symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
   - otherwise,
     - symbol #4 if UE capability uplinkTxSwitchingPeriod is 210us or
     - symbol #5 if UE capability uplinkTxSwitchingPeriod is 140us or
     - symbol #8 if UE capability uplinkTxSwitchingPeriod is 35us.

6.5.7.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.7.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-1 with condition 1T-2T
Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 1T-2T and PCELL Table H.3.11-4 with condition TDD and SwitchFrom Table H.3.11-5 with condition TDD-TDD and SwitchFrom Table H.3.11-11
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 1T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition TDD-TDD and SwitchTo TS 38.508-1 [14] Table 7.3.1-1 with condition TDDConf.2.2

Table 6.5.7.2.4.3-2: Physical layer parameters for DCI format 0_1 (Test procedure, step 6, Cell 1 and Cell 2)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

6.5.7.2.5 Test requirements

Table 6.5.7.1.5-1 defines the primary level settings including test tolerances for DL interruptions at switching between two uplink carriers in FDD-TDD CA.

Table 6.5.7.2.5-1:Cell specific test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter		Unit	Cell1	Cell2
Frequency Range			FR1	FR1
Duplex mode	Config 1		TDD	TDD
TDD configuration	Config 1		TDDConf.2.1 except that S='11DL:1GP:2UL'; *nrofDownlinkSymbols:11 nrofUplinkSymbols: 2*	TDDConf.2.2
$BW_{channel}$	Config 1		40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRS configuration in Table 4.4.1.1.5-2 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,5	SRS configuration in Table 4.4.1.1.5-2 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		dBm/15 kHz	-104	-104
SS-RSRP Note 3		dBm/ SSB SCS	-87	-87
CSI-RS RSRP Note6		dBm/SCS	-81	-81
$\hat{E}_s/I_{ot}$		dB	14	14
$\hat{E}_s/N_{oc}$		dB	14	14
N_{oc} Note 2	Config 1	dBm/SCS	-101	-101
Io Note3 on symbols without CSI-RS	Config 1	dBm/ 38.16MHz	-55.78	-55.78
Io Note6 on symbols with CSI-RS	Config 1	dBm/ 38.16MHz	-53.43	-53.43
Time offset to Cell1 Note 5		µs	-	0
Propagation Condition			AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in TS 38.133 clause 10.1.19.2.

The DL interruption lengths of X are defined in Table 6.5.7.2.5-2

Table 6.5.7.2.5-2: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14
Note 1: Uplink Tx switching period depends on UE capability *uplinkTxSwitchingPeriod*				

The UE shall send L1-RSRP report for Cell 1 and Cell 2 after the reception of corresponding DCI trigger. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7.1.5-3.

Table 6.5.7.2.5-3: L1-RSRP absolute accuracy requirements for the reported values

Normal Conditions	T1
Lowest reported value (CSI-RS#0)	65
Highest reported value (CSI-RS#0)	86

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.7A NR SA FR1 DL interruptions at switching between two uplink carriers with two transmit antenna connectors

6.5.7A.0 Minimum conformance requirements

The DL interruption requirements at dynamic switching between two uplink carriers specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration when the capability *[uplinkTxSwitchingPeriod2T2T]* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [9], where NR UL carrier 1 is capable of two transmit antenna connectors and NR UL carrier 2 is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

When dynamic switching between two uplink carriers is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR carrier 1 or carrier 2 as indicated in RRC signalling [13]. The DL interruption lengths of X are defined in Table 8.2.2.2.10A-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [2].

Table 6.5.7A.0-1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14
Note 1: Uplink Tx switching period depends on UE capability [*uplinkTxSwitchingPeriod2T2T*].				

The normative reference for this requirement is TS 38.133 [6] clauses 8.2.2.2.10A.

6.5.7A.1 NR SA FR1 DL interruptions at switching between two uplink carriers in FDD-TDD CA

6.5.7A.1.1 Test purpose

The purpose of this test is to verify the DL interruption requirements during UE dynamic switching between two uplink carriers.

6.5.7A.1.2 Test applicability

This test applies to all types of NR UE release 17 onwards configured with *uplinkTxSwitchingPeriod2T2T*.

6.5.7A.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7A.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.7A.1.

6.5.7A.1.4 Test description

6.5.7A.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7A.1.4.1-1.

Table 6.5.7A.1.4.1-1: Supported test configurations

Config	Description
6.5.7A.1-1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7A.1.4.1-2.

Table 6.5.7A.1.4.1-2: Initial conditions for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7A.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part. - Without LTE link - Without Faders		

1. The general test parameter settings are set up according to Table 6.5.7A.1.4.1-3.

2. Message contents are defined in clause 6.5.7A.1.4.3.

3. The test scenario comprises of two NR Cells. (Cell 1 and Cell 2). Cell 1 and Cell 2 are configured according to Annex C.1.2 and C.1.3.

Table 6.5.7A.1.4.1-3: General test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

6.5.7A.1.4.2 Test procedure

The test consists of two active NR cells: FR1 FDD PCell (Cell 1), FR1 TDD SCell (Cell 2). The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell 1 and Cell 2 and the RRC message including *uplinkTxSwitching* is received at the UE antenna connector.

UE is configured to transmit SRS on both PCell and SCell on the last 2 symbols of special slot. DL interruption is expected to take place prior to the SRS symbols.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure PCell (Cell 1) and SCell (Cell 2) according to Table 6.5.7A.1.5-1. Propagation conditions are set according to Annex C clause C.2.2.

3. The SS shall transmit an RRCReconfiguration message to configure PCell (Cell 1) and SCell (Cell 2) as per TS 38.508-1 [7] clause 7 with the message content exceptions defined in clause 6.5.7A.1.4.3. *UplinkTxSwitching* is configured to the UE.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. Set the parameters according to T1 in Tables 6.5.7A.1.5-1. T1 starts.

6. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB for PCell (Cell 1), on the following symbol in the slot overlapping with the 1st special slot of every radio frame of the SCell (Cell 2):

   PCell (Cell 1)

   - symbol#12 if UE does not report *uplinkTxSwitching-DL-Interruption-r16*;
   - otherwise,
     - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
     - symbol #9 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
     - symbol #10 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

7. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB for SCell (Cell 2), on the following symbol in the 2nd special slot of every radio frame:

   SCell (Cell 2)

   - symbol#10 if UE does not report *uplinkTxSwitching-DL-Interruption-r16;*
   - otherwise,
     - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
     - symbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
     - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

8. After SS transmits the DCI trigger, the UE shall send L1-RSRP report containing valid L1-RSRP report while meeting the test requirements in Table 6.5.7A.1.5-3, if so, increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.

9. SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5),

   or

   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 3-9 until a test verdict has been achieved.

6.5.7A.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.7A.1.4.3-0A: Common Exception messages for NR SA FR1 DL interruptions at switching between two uplink carriers in FDD-TDD CA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-1 with condition 2T-2T
Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 2T-2T and PCELL Table H.3.11-4 with condition FDD, SwitchFrom and 2TX Table H.3.11-5 with condition FDD-TDD abd SwitchFrom
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 2T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition FDD-TDD and SwitchTo Table H.3.11-11

Table 6.5.7.1.4.3-0B: Physical layer parameters for DCI format 0_1 (Test procedure, step 6 and step 7, Cell 1 and Cell 2)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

Table 6.5.7.1.4.3-1 - Table 6.5.7.1.4.3-2: Void

6.5.7A.1.5 Test requirements

Table 6.5.7A.1.5-1 defines the primary level settings including test tolerances for DL interruptions at switching between two uplink carriers in FDD-TDD CA.

Table 6.5.7A.1.5-1: Cell specific test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter		Unit	Cell1	Cell2
Frequency Range			FR1	FR1
Duplex mode	Config 1		FDD	TDD
TDD configuration	Config 1		N/A	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSConf.1 in Table 4.4.1.1.5-2 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl10,6 nrofSRS-Ports: ports2	SRSConf.1 in Table 4.4.1.1.5-2 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		dBm/15 kHz	-104	-104
SS-RSRP Note 3		dBm/SCS	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	14
$\hat{E}_s/N_{oc}$		dB	17	14
N_{oc} Note 2	Config 1	dBm/SCS	-104	-101
Io Note3	Config 1	dBm/9.36 MHz	-58.96	-
		dBm/ 38.16MHz	-	-55.78
Time offset to Cell1 Note 5		µs	-	0
Propagation Condition			AWGN	AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in TS 38.133 clause 10.1.19.2.

The DL interruption lengths of X are defined in Table 6.5.7A.1.5-2

Table 6.5.7A.1.5-2: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14
Note 1: Uplink Tx switching period depends on UE capability [*uplinkTxSwitchingPeriod2T2T]*.				

The UE shall send L1-RSRP report for Cell 1 and Cell 2 after the reception of corresponding DCI trigger.. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7A.1.5-3.

Table 6.5.7A.1.5-3: L1-RSRP absolute accuracy requirements for the reported values

Normal Conditions	T1
Lowest reported value	65
Highest reported value	86

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.7A.2 NR SA FR1 DL interruptions at switching between two uplink carriers in TDD-TDD CA

6.5.7A.2.1 Test purpose

The purpose of this test is to verify the DL interruption requirements during UE dynamic switching between two uplink carriers.

6.5.7A.2.2 Test applicability

This test applies to all types of NR UE release 17 onwards configured with *uplinkTxSwitchingPeriod2T2T* and supports *simultaneousRxTxInterBandCA*.

6.5.7A.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7A.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.7A.2

6.5.7A.2.4 Test description

6.5.7A.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7A.2.4.1-1.

Table 6.5.7A.2.4.1-1: Supported test configurations

Config	Description
6.5.7A.2-1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7A.2.4.1-2.

Table 6.5.7A.2.4.1-2: Initial conditions for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7A.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part. - Without LTE link - Without Faders		

1. The general test parameter settings are set up according to Table 6.5.7A.2.4.1-3.
2. Message contents are defined in clause 6.5.7A.2.4.3.
3. The test scenario comprises of two NR Cells. (Cell 1 and Cell 2). Cell 1 and Cell 2 are configured according to Annex C.1.2 and C.1.3.

Table 6.5.7A.2.4.1-3: General test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

6.5.7A.2.4.2 Test procedure

The test consists of two active NR cells: FR1 TDD PCell (Cell 1), FR1 TDD SCell (Cell 2). The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell1 and Cell2 and the RRC message including *uplinkTxSwitching* is received at the UE antenna connector.

UE is configured to transmit SRS on both PCell and SCell on the last 2 symbols of special slot. DL interruption is expected to take place prior to the SRS symbols.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure PCell (Cell1) and SCell (Cell2) according to Table 6.5.7A.2.5-1. Propagation conditions are set according to Annex C clause C.2.2.

3. The SS shall transmit an RRCReconfiguration message to configure PCell (Cell1) and SCell (Cell2) as per TS 38.508-1 [7] clause 7 with the message content exceptions defined in clause 6.5.7A.2.4.3. *UplinkTxSwitching* is configured to the UE.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. Set the parameters according to T1 in Tables 6.5.7A.2.5-1. T1 starts.

6. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB on following symbol on the 1st special slot of every even radio frame on PCell (Cell 1):

   - symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

   - otherwise,

     - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or

     - symbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or

     - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

7. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB on following symbol on the 2nd special slot of every even radio frame on SCell (Cell 2):

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

- otherwise,

  - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or

  - symbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or

  - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

8. After SS transmits the DCI trigger, the UE shall send L1-RSRP report containing valid L1-RSRP report while meeting the test requirements given in Table 6.5.7A.2.5-3, if so, increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.

9. SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5),

   or

   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 3-9 until a test verdict has been achieved.

6.5.7A.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.7.2.4.3-0A: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-1 with condition 2T-2T

Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 2T-2T and PCELL Table H.3.11-4 with condition TDD, SwitchFrom and 2TX Table H.3.11-5 with condition TDD-TDD and SwitchFrom Table H.3.11-11
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 2T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition TDD-TDD and SwitchTo TS 38.508-1 [14] Table 7.3.1-1 with condition TDDConf.2.2

T Table 6.5.7.2.4.3-0B: Physical layer parameters for DCI format 0_1 (Test procedure, step 6 and step 7, , Cell 1 and Cell 2)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

Table 6.5.7.2.4.3-1 - Table 6.5.7.2.4.3-2: Void

6.5.7A.2.5 Test requirements

Table 6.5.7A.2.5-1 defines the primary level settings including test tolerances for DL interruptions at switching between two uplink carriers in TDD-TDD CA.

Table A.6.5.7A.2.5-1: Cell specific test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter		Unit	Cell1	Cell2
Frequency Range			FR1	FR1
Duplex mode	Config 1		TDD	TDD
TDD configuration	Config 1		TDDConf.2.1 except that S='1 1DL: :2UL'; *nrofDownlinkSymbols: 11* *nrofUplinkSymbols: 2*	TDDConf.2.2
$BW_{channel}$	Config 1		40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,5 nrofSRS-Ports: ports2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0

EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		dBm/15 kHz	-104	-104
SS-RSRP Note 3		dBm/SCS	-87	-87
$\hat{E}_s/I_{ot}$		dB	14	14
$\hat{E}_s/N_{oc}$		dB	14	14
N_{oc} Note 2	Config 1	dBm/SCS	-101	-101
Io Note3	Config 1	dBm/38.16 MHz	-55.78	-55.78
Time offset to Cell1 Note 5		μs	-	0
Propagation Condition			AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in TS 38.133 clause 10.1.19.2.

The DL interruption lengths of X are defined in Table 6.5.7A.2.5-2

Table 6.5.7A.2.5-2: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14

Note 1: Uplink Tx switching period depends on UE capability [*uplinkTxSwitchingPeriod2T2T].*

The UE shall send L1-RSRP report for Cell 1 and Cell 2 after the reception of corresponding DCI trigger. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7A.2.5-3.

Table 6.5.7A.2.5-3: L1-RSRP absolute accuracy requirements for the reported values

Normal Conditions	T1
Lowest reported value	65
Highest reported value	86

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%

6.5.7B DL interruptions at switching between one uplink band with one transmit antenna connector and one uplink band with two transmit antenna connectors

6.5.7B.0 Minimum conformance requirements

The DL interruption requirements at dynamic switching between two uplink bands specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration when the capability *[uplinkTxSwitchingPeriod]* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [9], where NR UL carrier 1 in band A is capable of one transmit antenna connector, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

When dynamic switching between two uplink bands is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR band A or band B as indicated in RRC signalling [13]. The DL interruption lengths of X are defined in Table 8.2.2.2.10-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [2].

Table 6.5.7B.0-1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14
Note 1: Uplink Tx switching period depends on UE capability *uplinkTxSwitchingPeriod*				

The normative reference for this requirement is TS 38.133 [6] clauses 8.2.2.2.10B.

6.5.7B.1 NR SA FR1 DL Interruptions at switching between two uplink bands in FDD-TDD CA

6.5.7B.1.1 Test purpose

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink bands.

6.5.7B.1.2 Test applicability

This test applies to all types of NR UE release 17 onwards configured with *uplinkTxSwitchingPeriod*.

6.5.7B.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7B.0.

The normative reference for this requirement is TS 38.133 [6] A.6.5.7B.1.

6.5.7B.1.4 Test description

6.5.7B.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7B.1.4.1-1.

Table 6.5.7B.1.4.1-1: Supported test configurations

Config	Description

6.5.7B.1-1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7B.1.4.1-2.

Table 6.5.7B.1.4.1-2: Initial conditions for DL interruptions at switching between two uplink bands in FDD-TDD CA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7B.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part. - Without LTE link - Without Faders		

1. The general test parameter settings are set up according to Table 6.5.7B.1.4.1-3.
2. Message contents are defined in clause 6.5.7B.1.4.3.
3. The test scenario comprises of three NR Cells. (Cell 1, Cell 2 and Cell 3). Cell 1, Cell 2 and Cell 3 are configured according to Annex C.1.2 and C.1.3.

Table 6.5.7B.1.4.1-3: General test parameters for DL interruptions at switching between two uplink bands in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Three radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	Cell1: FR1 PCell on RF channel number 1 in band A Cell 2: FR1 SCell on RF channel number 2 in band B Cell 3: FR1 SCell on RF channel number 3 in band B Note: Cell 2 and Cell 3 are two contiguous aggregated carriers
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

6.5.7B.1.4.2 Test procedure

The test consists of three active NR cells: FR1 FDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3) where cell 1 in band A is with 1TX, cell 2 and cell 3 in band B with 2Tx, cell 2 and cell 3 are two contiguous aggregated

carriers. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell 1, Cell 2 and Cell 3 and the RRC message including *uplinkTxSwitching* is received at the UE antenna connector.

UE is configured to transmit SRS on PCell and SCells on the last 2 symbols of special slot. DL interruption is expected to take place prior to the SRS symbols.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Configure PCell (Cell 1) and SCells (Cell 2 and Cell 3) according to Table 6.5.7B.1.5-1. Propagation conditions are set according to Annex C clause C.2.2.
3. The SS shall transmit an RRCReconfiguration message to configure PCell (Cell 1) and SCells (Cell 2 and Cell 3) as per TS 38.508-1 [7] clause 7 with the message content exceptions defined in clause 6.5.7B.1.4.3. *UplinkTxSwitching* is configured to the UE.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. Set the parameters according to T1 in Tables 6.5.7B.1.5-1. T1 starts.
6. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB for PCell (Cell 1), on the following symbol in the slot overlapping with the 1st special slot of of every radio frame the SCells (Cell 2 and Cell 3):
   - symbol#12 if UE does not report *uplinkTxSwitching-DL-Interruption-r16*;
   - otherwise,
     - symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 210us or
     - symbol #9 if UE capability *uplinkTxSwitchingPeriod* is 140us or
     - symbol #10 if UE capability *uplinkTxSwitchingPeriod* is 35us.
7. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB for SCells (Cell 2 and Cell 3), on the following symbol in the 2nd special slot of every radio frame:
   - symbol#10 if UE does not report *uplinkTxSwitching-DL-Interruption-r16*;
   - otherwise,
     - symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or
     - symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or
     - symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.
8. After SS transmits the DCI trigger, the UE shall send L1-RSRP report containing valid L1-RSRP report while meeting the test requirements in Table 6.5.7B.1.5-3, if so, increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.
9. SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5),

   or

   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
10. Repeat step 3-9 until a test verdict has been achieved.

6.5.7B.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.7B.1.4.3-0A: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-1 with condition 1T-2T and 2SCELLS
Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 1T-2T and PCELL Table H.3.11-4 with condition FDD and SwitchFrom Table H.3.11-5 with condition FDD-TDD, SwitchFrom and 2SCELLS
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 1T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition FDD-TDD and SwitchTo Table H.3.11-11
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 1T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition FDD-TDD and SwitchTo Table H.3.11-11

Table 6.5.7B.1.4.3-0B: Physical layer parameters for DCI format 0_1 (Test procedure, step 6 and step 7, Cell 1, Cell 2 and Cell 3)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

Table 6.5.7B.1.4.3-1 - Table 6.5.7B.1.4.3-4: *Void*

6.5.7B.1.5 Test requirements

Table 6.5.7B.1.5-1 defines the primary level settings including test tolerances for DL interruptions at switching between two uplink bands in FDD-TDD CA.

Table 6.5.7B.1.5-1: Cell specific test parameters for DL interruptions at switching between two uplink bands in FDD-TDD CA

Parameter		Unit	Cell1	Cell2	Cell3
Frequency Range			FR1	FR1	FR1
Duplex mode	Config 1		FDD	TDD	TDD
TDD configuration	Config 1		N/A	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52	40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSConf.1 in Table 4.4.1.1.5-2 is applied except that: resourceMappingstartPosition: 0resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl10,6	SRSConf.1 in Table 4.4.1.1.5-2 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2	SRSConf.1 in Table 4.4.1.1.5-2 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2

PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 2		dBm/ 15 kHz	-104	-104	-104
SS-RSRP Note 3		dBm/ SCS	-87	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	14	14
$\hat{E}_s/N_{oc}$		dB	17	14	14
N_{oc} Note 2	Config 1	dBm/ SCS	-104	-101	-101
Io Note3	Config 1	dBm/ 9.36 MHz	-58.96	-	-
		dBm/ 38.16 MHz	-	-55.79	-55.79
Time offset to Cell1 Note 5		µs	-	0	0
Propagation Condition			AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in TS 38.133 clause 10.1.19.2.

The DL interruption lengths of X are defined in Table 6.5.7B.1.5-2

Table 6.5.7B.1.5-2: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink bands

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14

Note 1: Uplink Tx switching period depends on UE capability *uplinkTxSwitchingPeriod*.

The UE shall send L1-RSRP report for Cell 1, Cell 2 and Cell 3 after the reception of DCI trigger. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7B.1.5-3.

Table 6.5.7B.1.5-3: L1-RSRP absolute accuracy requirements for the reported values

Normal Conditions	T1
Lowest reported value	65
Highest reported value	86

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.7B.2 NR SA FR1 DL Interruptions at switching between two uplink bands in TDD-TDD CA

6.5.7B.2.1 Test purpose

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink bands.

6.5.7B.2.2 Test applicability

This test applies to all types of NR UE release 17 onwards configured with *uplinkTxSwitchingPeriod* and supports *simultaneousRxTxInterBandCA.*

6.5.7B.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7B.0.

The normative reference for this requirement is TS 38.133 [6] clauses A.6.5.7B.2

6.5.7B.2.4 Test description

6.5.7B.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7B.2.4.1-1.

Table 6.5.7B.2.4.1-1: Supported test configurations

Config	Description
6.5.7B.2-1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7B.2.4.1-2.

Table 6.5.7B.2.4.1-2: Initial conditions for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7B.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part. - Without LTE link		

	- Without Faders	

1. The general test parameter settings are set up according to Table 6.5.7B.2.4.1-3.

2. Message contents are defined in clause 6.5.7B.2.4.3.

3. The test scenario comprises of three NR Cells. (Cell 1, Cell 2 and Cell3). Cell 1, Cell 2 and Cell3 are configured according to Annex C.1.2 and C.1.3.

Table 6.5.7B.2.4.1-3: General test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	Cell1: FR1 PCell on RF channel number 1 in band A Cell 2: FR1 SCell on RF channel number 2 in band B Cell 3: FR1 SCell on RF channel number 3 in band B Note: Cell 2 and Cell 3 are two contiguous aggregated carriers
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

6.5.7B.2.4.2 Test procedure

FR1 TDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3) where cell 1 in band A is with 1TX, cell2 and cell 3 in band B with 2Tx, cell2 and cell3 are two contiguous aggregated carriers. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell1, Cell2 and Cell3 and the RRC message including *uplinkTxSwitching* is received at the UE antenna connector.

UE is configured to transmit SRS on all the PCell and SCell on the last 2 symbols of special slot. DL interruption is expected to take place prior to the SRS symbols.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure PCell (Cell1) and SCell (Cell2 and Cell3) according to Table 6.5.7B.2.5-1. Propagation conditions are set according to Annex C clause C.2.2.

3. The SS shall transmit an RRCReconfiguration message to configure PCell (Cell1) and SCell (Cell2 and Cell3) as per TS 38.508-1 [7] clause 7 with the message content exceptions defined in clause 6.5.7B.2.4.3. *UplinkTxSwitching* is configured to the UE.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. Set the parameters according to T1 in Tables 6.5.7B.2.5-1. T1 starts.

6. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB on following symbol on the 1st special slot of every even radio frame on PCell (Cell 1):

   - symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

- otherwise,

- symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or

- symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or

- symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

7. For NR TDD Cell 2 and NR TDD Cell 3, SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB on following symbol on the 2nd special slot of every even radio frame on SCells (Cell2 and Cell3):

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

- otherwise,

  - symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or

  - symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or

  - symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

8. After SS transmits the DCI trigger, the UE shall send L1-RSRP report containing valid L1-RSRP report while meeting the test requirements given in Table 6.5.7A.2.5-3, if so, increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.

9. SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5),

   or

   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 3-9 until a test verdict has been achieved.

6.5.7B.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.7B.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-1 with condition 1T-2T and 2SCELLS
Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 1T-2T and PCELL Table H.3.11-4 with condition TDD and SwitchFrom Table H.3.11-5 with condition TDD-TDD, SwitchFrom and 2SCELLS Table H.3.11-11
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 1T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition TDD-TDD and SwitchTo TS 38.508-1 [14] Table 7.3.1-1 with condition TDDConf.2.2
Cell-specific messages and information elements contents exceptions for Cell 3	Table H.3.11-3 with condition 1T-2T Table H.3.11-4 with condition SwitchTo and 2TX Table H.3.11-5 TS 38.508-1 [14] Table 7.3.1-1 with condition TDDConf.2.2

Table 6.5.7B.2.4.3-2: Physical layer parameters for DCI format 0_1 (Test procedure, step 6 and step 7, Cell 1, Cell 2 and Cell 3)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

Table 6.5.7B.2.4.3-1 - Table 6.5.7B.2.4.3-4: Void

6.5.7B.2.5 Test requirements

Table 6.5.7B.2.5-1 defines the primary level settings including test tolerances for DL interruptions at switching between two uplink carriers in TDD-TDD CA.

Table 6.5.7B.2.5-1: Cell specific test parameters for DL interruptions at switching between two uplink bands in TDD-TDD CA

Parameter		Unit	Cell1	Cell2	Cell3
Frequency Range			FR1	FR1	FR1
Duplex mode	Config 1		TDD	TDD	TDD
TDD configuration	Config 1		TDDConf.2.1 except that S='1 1DL: :2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*	TDDConf.2.2	TDDConf.2.2
$BW_{channel}$	Config 1		40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,5	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 2		dBm/15 kHz	-104	-104	-104
SS-RSRP Note 3		dBm/SCS	-87	-87	-87
$\hat{E}_s/I_{ot}$		dB	14	14	14
$\hat{E}_s/N_{oc}$		dB	14	14	14
N_{oc} Note 2	Config 1	dBm/SCS	-101	-101	-101

Io[Note3]	Config 1	dBm/38.16 MHz	-55.78	-55.78	-55.78
Time offset to Cell1 [Note 5]		µs	-	0	0
Propagation Condition			AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in TS 38.133 clause 10.1.19.2.

The DL interruption lengths of X are defined in Table 6.5.7B.2.5-2.

Table 6.5.7B.2.5-2: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period [Note1]		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14

Note 1: Uplink Tx switching period depends on UE capability *uplinkTxSwitchingPeriod*.

The UE shall send L1-RSRP report from the reception of DCI trigger. The L1-RSRP report shall include the results of CSI-RS#0, CSI-RS#1 and CSI-RS#2. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7A.2.5-3.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.7C DL interruptions at switching between two uplink bands with two transmit antenna connectors

6.5.7C.0 Minimum conformance requirements

The DL interruption requirements at dynamic switching between two uplink bands specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration when the capability *uplinkTxSwitchingPeriod2T2T* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [9], where NR UL carrier 1 in band A is capable of two transmit antenna connectors, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

When dynamic switching between two uplink bands is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [13]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR band A or band B as indicated in RRC signalling [13]. The DL interruption lengths of X are defined in Table 6.5.7C.0-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DLInterruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [2].

Table 6.5.7C.0-1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period [Note1]

		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14
Note 1: Uplink Tx switching period depends on UE capability [*uplinkTxSwitchingPeriod2T2T*].				

The normative reference for this requirement is TS 38.133 [6] clauses 8.2.2.2.10C.

6.5.7C.1 NR SA FR1 DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA

6.5.7C.1.1 Test purpose

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA.

6.5.7C.1.2 Test applicability

This test applies to all types of NR UE release 17 onwards configured with *uplinkTxSwitchingPeriod2T2T*.

6.5.7C.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7C.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.7C.1

6.5.7C.1.4 Test description

6.5.7C.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7C.1.4.1-1.

Table 6.5.7C.1.4.1-1: Supported test configurations

Config	Description
6.5.7C.1-1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7C.1.4.1-2.

Table 6.5.7C.1.4.1-2: Initial conditions for DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7C.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part. - Without LTE link - Without Faders		

1. The general test parameter settings are set up according to Table 6.5.7C.1.4.1-3.

2. Message contents are defined in clause 6.5.7C.1.4.3.

3. The test scenario comprises of three NR Cells. (Cell 1, Cell 2 and Cell 3). Cell 1, Cell 2 and Cell 3 are configured according to Annex C.1.2 and C.1.3.

Table 6.5.7C.1.4.1-3: General test parameters for DL interruptions at switching between two uplink bands with two antenna transmit connectors in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Three radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 Scell Cell 3: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2 FR1 SCell on RF channel number 3
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

6.5.7C.1.4.2 Test procedure

The test consists of three active NR cells: FR1 FDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3). The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell1, Cell2 and Cell3 and the RRC message including *uplinkTxSwitching* is received at the UE antenna connector.

UE is configured to transmit SRS on PCell (Cell 1), Scell (Cell 2) and SCell (Cell 3) on the last 2 symbols of special slot. DL interruption is expected to take place prior to the SRS symbols.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure FDD PCell (Cell 1), TDD SCell(Cell 2) and TDD SCell(Cell 3) according to Table 6.5.7C.1.5-1. Propagation conditions are set according to Annex C clause C.2.2.

3. The SS shall transmit an RRCReconfiguration message to configure FDD PCell (Cell 1), TDD SCell(Cell 2) and TDD SCell(Cell 3) as per TS 38.508-1 [7] clause 7 with the message content exceptions defined in clause 6.5.7C.1.4.3. *UplinkTxSwitching* is configured to the UE.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. Set the parameters according to T1 in Tables 6.5.7C.1.5-1. T1 starts.

6. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB for NR FDD carrier (Cell 1), on the following symbol in the slot overlapping with the 1st special slot of every radio frame of the NR TDD carrier (Cell 2) and NR TDD carrier (Cell 3):

   - symbol#12 if UE does not report *uplinkTxSwitching-DL-Interruption*;

   - otherwise,

     - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or

- symbol #9 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
- symbol #10 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

7. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB for NR TDD carrier (Cell 2) and NR TDD carrier (Cell 3), on the following symbol in the 2nd special slot of every radio frame:
   - symbol#10 if UE does not report *uplinkTxSwitching-DL-Interruption*;
   - otherwise,
     - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
     - symbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
     - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.
8. After SS transmits the DCI trigger, the UE shall send L1-RSRP report containing valid L1-RSRP report while meeting the test requirements in Table 6.5.7C.1.5-3, if so, increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.
9. SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5),

   or

   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
10. Repeat step 3-9 until a test verdict has been achieved.

6.5.7C.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.7C.1.4.3-0A: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-1 with condition 2T-2T and 2SCELLS
Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 2T-2T and PCELL Table H.3.11-4 with condition FDD, SwitchFrom and 2TX Table H.3.11-5 with condition FDD-TDD, SwitchFrom and 2SCELLS
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 2T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition FDD-TDD and SwitchTo Table H.3.11-11
Cell-specific messages and information elements contents exceptions for Cell 3	Table H.3.11-3 with condition 2T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition FDD-TDD and SwitchTo Table H.3.11-11

Table 6.5.7C.1.4.3-0B: Physical layer parameters for DCI format 0_1 (Test procedure, step 6 and step 7, Cell 1, Cell 2 and Cell 3)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	“1”	

Table 6.5.7C.1.4.3-1 - Table 6.5.7C.1.4.3-4 Void

6.5.7C.1.5 Test requirements

Table 6.5.7C.1.5-1 defines the primary level settings including test tolerances for DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA.

Table 6.5.7C.1.5-1: Cell specific test parameters for DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA

Parameter		Unit	Cell1	Cell2	Cell3
Frequency Range			FR1	FR1	FR1
Duplex mode	Config 1		FDD	TDD	TDD
TDD configuration	Config 1		N/A	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52	40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition:0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl10,6 nrofSRS-Ports: ports2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0	0

EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 2		dBm/15 kHz	-104	-104	-104
SS-RSRP Note 3		dBm/SCS	-87	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	14	14
$\hat{E}_s/N_{oc}$		dB	17	14	14
N_{oc} Note 2	Config 1	dBm/SCS	-104	-101	-101
Io Note3	Config 1	dBm/9.36 MHz	-58.96	-	-
		dBm/ 38.16MHz	-	-55.79	-55.79
Time offset to Cell1 Note 5		µs	-	0	0
Propagation Condition			AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in TS 38.133 clause 10.1.19.2.

The DL interruption lengths of X are defined in Table 6.5.7C.1.5-2.

Table 6.5.7C.1.5-2: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink bands

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14
Note 1: Uplink Tx switching period depends on UE capability [*uplinkTxSwitchingPeriod2T2T*].				

The UE shall send L1-RSRP report for Cell 1, Cell 2 and Cell 3 after the reception of corresponding DCI trigger. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7C.1.5-3.

Table 6.5.7C.1.5-3: L1-RSRP absolute accuracy requirements for the reported values

Normal Conditions	T1
Lowest reported value	65
Highest reported value	86

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.7C.2 NR SA FR1 DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA

6.5.7C.2.1 Test purpose

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA.

6.5.7C.2.2 Test applicability

This test applies to all types of NR UE release 17 onwards, configured with *uplinkTxSwitchingPeriod2T2T*.and supports *simultaneousRxTxInterBandCA.*

6.5.7C.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7C.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.7C.2

6.5.7C.2.4 Test description

6.5.7C.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7C.2.4.1-1.

Table 6.5.7C.2.4.1-1: Supported test configurations

Config	Description
6.5.7C.2-1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7C.2.4.1-2.

Table 6.5.7C.2.4.1-2: Initial conditions for DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7C.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part. - Without LTE link - Without Faders		

1. The general test parameter settings are set up according to Table 6.5.7C.2.4.1-3.

2. Message contents are defined in clause 6.5.7C.2.4.3.

3. The test scenario comprises of three NR Cells. (Cell 1, Cell 2 and Cell 3). Cell 1, Cell 2 and Cell 3 are configured according to Annex C.1.2 and C.1.3.

Table 6.5.7C.2.4.1-3: General test parameters for DL interruptions at switching between two uplink bands with two antenna transmit connectors in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Three radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 Scell Cell 3: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2 FR1 SCell on RF channel number 3
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

6.5.7C.2.4.2 Test procedure

The test consists of three active NR cells: FR1 TDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3). The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected to Cell1, Cell2 and Cell3 and the RRC message including *uplinkTxSwitching* is received at the UE antenna connector.

UE is configured to transmit SRS on PCell (Cell 1), Scell (Cell 2) and SCell (Cell 3) on the last 2 symbols of special slot. DL interruption is expected to take place prior to the SRS symbols.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Configure TDD PCell (Cell 1), TDD SCell(Cell 2) and TDD SCell(Cell 3) according to Table 6.5.7C.2.5-1. Propagation conditions are set according to Annex C clause C.2.2.

3. The SS shall transmit an RRCReconfiguration message to configure TDD PCell (Cell 1), TDD SCell(Cell 2) and TDD SCell(Cell 3) as per TS 38.508-1 [7] clause 7 with the message content exceptions defined in clause 6.5.7C.2.4.3. *UplinkTxSwitching* is configured to the UE.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. Set the parameters according to T1 in Tables 6.5.7C.2.5-1. T1 starts.

6. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB for NR TDD carrier (Cell 1), on the following symbol in the 1st special slot of every even radio frame on PCell (Cell 1):

   - symbol#10 if UE does not report *uplinkTxSwitching-DL-Interruption*;
   - otherwise,
     - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
     - symbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
     - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

7. SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boosting 6dB for NR TDD carrier SCell (Cell 2) and NR TDD carrier SCell (Cell 3), on the following symbol on the 2nd special slot of every even radio frame on SCells (Cell 2 and Cell 3):
- symbol#10 if UE does not report *uplinkTxSwitching-DL-Interruption*;

- otherwise,

  - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
  - symbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
  - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

8. After SS transmits the DCI trigger, the UE shall send L1-RSRP report containing valid L1-RSRP report while meeting the test requirements given in Table 6.5.7C.2.5-3, if so, increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.

9. SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED TS 38.508-1 [14] clause 4.5),

   or

   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 3-9 until a test verdict has been achieved.

6.5.7C.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.7C.2.4.3-0A: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-1 with condition 2T-2T and 2SCELLS
Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 2T-2T and PCELL Table H.3.11-4 with condition TDD, SwitchFrom and 2TX Table H.3.11-5 with condition TDD-TDD, SwitchFrom and 2SCELLS Table H.3.11-11
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 2T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition TDD-TDD and SwitchTo TS 38.508-1 [14] Table 7.3.1-1 with condition TDDConf.2.2
Cell-specific messages and information elements contents exceptions for Cell 3	Table H.3.11-3 with condition 2T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition TDD-TDD and SwitchTo TS 38.508-1 [14] Table 7.3.1-1 with condition TDDConf.2.2

Table 6.5.7C.2.4.3-0B: Physical layer parameters for DCI format 0_1 (Test procedure, step 6 and step 7, Cell 1, Cell 2 and Cell 3)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

Table 6.5.7.2.4.3-1 - Table 6.5.7.2.4.3-2: Void

6.5.7C.2.5 Test requirements

Table 6.5.7C.2.5-1 defines the primary level settings including test tolerances for DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA.

Table 6.5.7C.2.5-1: Cell specific test parameters for DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA

Parameter		Unit	Cell1	Cell2	Cell3
Frequency Range			FR1	FR1	FR1
Duplex mode	Config 1		TDD	TDD	TDD
TDD configuration	Config 1		TDDConf.2.1 except that S='1 1DL: :2UL'; *nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2*	TDDConf.2.2	TDDConf.2.2
$BW_{channel}$	Config 1		40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106	40 MHz: $N_{RB,c}$ = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,5 nrofSRS-Ports: ports2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2	SRSConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					

EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 2		dBm/15 kHz	-104	-104	-104
SS-RSRP Note 3		dBm/SCS	-87	-87	-87
$\hat{E}_s/I_{ot}$		dB	14	14	14
$\hat{E}_s/N_{oc}$		dB	14	14	14
N_{oc} Note 2	Config 1	dBm/SCS	-101	-101	-101
Io Note3	Config 1			-	-
		dBm/ 38.16MHz	-55.78	-55.78	-55.78
Time offset to Cell1 Note 5		µs	-	0	0
Propagation Condition			AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in TS 38.133 clause 10.1.19.2.

The DL interruption lengths of X are defined in Table 6.5.7C.2.5-2

Table 6.5.7C.2.5-2: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink bands

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14

Note 1: Uplink Tx switching period depends on UE capability [*uplinkTxSwitchingPeriod2T2T]*.

The UE shall send L1-RSRP report for Cell 1, Cell 2 and Cell 3 after the reception of DCI trigger. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7C.2.5-3.

Table 6.5.7C.2.5-3: L1-RSRP absolute accuracy requirements for the reported values

Normal Conditions	T1
Lowest reported value	65
Highest reported value	86

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.7D DL interruptions at UE switching across three or four uplink bands

6.5.7D.0 Minimum conformance requirements

The DL interruption requirements at dynamic switching across three or four uplink bands specified in this clause are applicable for an NR inter-band CA configuration and SUL band configuration with inter-band CA when the capability *BandCombination-UplinkTxSwitch-v1800* is present, and are only applicable for uplink switching mechanisms specified in clause 6.1.6 of TS 38.214 [9]. In the NR inter-band CA configuration and SUL band configuration with inter-band CA, the number of NR uplink bands with different carrier frequencies is three or four. NR UL carrier(s) in each of the three or four uplink bands are capable of one or two transmit antenna connector(s), according to the UE capability.

When dynamic switching across three or four uplink bands is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL Tx switching period located in uplink NR band(s) as indicated in RRC signalling [2]. The DL interruption lengths of X for single TAG and for 2-TAG are defined in Table 6.5.7D.0-1 and Table 6.5.7D.0-2.

Note: If one downlink carrier is indicated to be interrupted by two band pairs for dynamic switching simultaneously, the DL interruption length on the victim carrier is determined by the maximum of uplink switching periods of the two band pairs. If *UplinkTxSwitchingAdditionalPeriodDualUL-r18* is reported, DL interruption length is determined by the uplink Tx switching period, which is indicated by *UplinkTxSwitchingAdditionalPeriodDualUL-r18*. If *periodOnULBands-r18* is reported, DL interruption length is determined by the uplink Tx switching period, which is indicated by *periodOnULBands-r18*.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations and SUL band configurations with inter-band CA as specified in TS 38.101-1 [2].

Table 6.5.7D.0-1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching across three or four uplink bands for single TAG

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
Note 1: Uplink Tx switching period depends on UE capability. Note 2: RTD=3us is assumed to derive the DL interruption length.				

Table 6.5.7D.0-2: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching across three or four uplink bands for two TAGs

μ	NR Slot length (ms)	Uplink Tx switching period Note1		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	8
Note 1: Uplink Tx switching period depends on UE capability. Note 2: RTD=9 us is assumed to derive the DL interruption length.				

The normative reference for this requirement is TS 38.133 [6] clauses 8.2.2.2.10D.

6.5.7D.1 NR SA FR1 DL interruptions at switching across three uplink bands in TDD-TDD CA for single TAG

6.5.7D.1.1 Test purpose

The purpose of this test is to verify DL interruption requirements during UE dynamic switching across three uplink bands for single TAG defined in TS 38.133 [6] clause 8.2.2.2.10D.

6.5.7D.1.2 Test applicability

This test applies to all types of NR UE release 18 onwards supporting of inter-band UL CA (three bands), dynamic UL Tx switching across up to 4 bands and simultaneous transmission and reception in TDD-TDD inter-band NR CA.

6.5.7D.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7D.0.

The normative reference for this requirement is TS 38.133 [6] A.6.5.7D.1

6.5.7D.1.4 Test description

The test consists of three active FR1 NR cells: PCell (Cell 1), SCell (Cell 2) and SCell (Cell 3), where

- Cell 1, Cell 2 and Cell 3 are on NR UL carrier 1 in band A, NR UL carrier 2 in band B and NR UL carrier 3 in band C, respectively;
- Cell 1, Cell 2 and Cell 3 belong to the same TAG;
- Band A, B and C are three different TDD bands.
- UE is capable to transmit with one, one and two transmitting antenna connector(s) on Cell 1, Cell 2 and Cell 3, respectively;

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *UplinkTxSwitchingMoreBands-r18* is indicated to UE.

6.5.7D.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7D.1.4.1-1.

Table 6.5.7D.1.4.1-1: Supported test configurations

Config	Description
6.5.7D.1-1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7D.1.4.1-2.

Table 6.5.7D.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7D.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2 for Cell 1 and Cell 2, A.3.1.8.2a for Cell 3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE link Without Fader		

1. The general test parameter settings are set up according to Table 6.5.7D.1.4.1-3.

2. Message contents are defined in clause 6.5.7D.1.4.3.

3. The test scenario comprises of three NR Cells. (Cell 1, Cell 2 and Cell 3). Cell 1, Cell 2 and Cell 3 are configured according to Annex C.1.2 and C.1.3.

Table 6.5.7D.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	Three radio channels are used for this test.
Active cell		Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2 FR1 SCell on RF channel number 3
CP length		Normal	
DRX		OFF	
Measurement gap pattern Id		OFF	
Filter coefficient		0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	5	

6.5.7D.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS transmits an *RRCReconfiguration* message with *UplinkTxSwitchingMoreBands-r18* to the UE to configure Cell 2 and Cell 3 as SCells according to Table 6.5.7D.1.5-1.

3. The UE shall transmit an *RRCReconfigurationComplete* message.

4. The SS activates Cell 2 and Cell 3.

5. Set the parameters according to T1 in Table 6.5.7D.1.4.1-3 and Table 6.5.7D.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2. T1 starts.

6. For Cell 1 and Cell 2, the SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boost of 6dB on the following symbol in the 1st special slot of every even radio frame:

   - symbol #10 if UE does not report *uplinkTxSwitching-DL-Interruption-r18*;
   - otherwise,
     - symbol #4 if UE capability uplink Tx switching period is 210 us, or
     - symbol #5 if UE capability uplink Tx switching period is 140us, or
     - symbol #8 if UE capability uplink Tx switching period is 35us.

7. For Cell 3, the SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boost of 6dB on the following symbol in the 2nd special slot of every even radio frame:

   - symbol #10 if UE does not report *uplinkTxSwitching-DL-Interruption-r18*;
   - otherwise,
     - symbol #4 if UE capability uplink Tx switching period is 210 us, or
     - symbol #5 if UE capability uplink Tx switching period is 140us, or
     - symbol #8 if UE capability uplink Tx switching period is 35us.

8. If the UE sends L1-RSRP report containing valid L1-RSRP results for Cell 1, Cell 2 and Cell 3 and each L1-RSRP result meet the test requirements given in Table 6.5.7D.1.5-3, increase the number of passed iterations by one otherwise increase the number of failed iterations by one.

9. SS transmits in Cell 1 an *RRCReconfiguration* message to release all SCells and ensures UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the reconfiguration fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5)

   or

   switches off and on the UE and ensures UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until a test verdict has been achieved.

6.5.7D.1.4.3 Message contents

Table 6.5.7D.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-2 with condition 1T1T-2T
Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 1T1T-2T Table H.3.11-4 with condition TDD and SwitchFrom Table H.3.11-5 with condition TDD-TDD and SwitchFrom Table H.3.11-11
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 1T1T-2T Table H.3.11-4 with condition TDD and SwitchFrom Table H.3.11-5 with condition TDD-TDD and SwitchFrom Table H.3.11-11
Cell-specific messages and information elements contents exceptions for Cell 3	Table H.3.11-3 with condition 1T1T-2T Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition TDD-TDD and SwitchTo TS 38.508-1 [14] Table 7.3.1-1 with condition TDDConf.2.2

Table 6.5.7D.1.4.3-2: Physical layer parameters for DCI format 0_1 (Test procedure, step 6 & step 7, Cell 1, Cell2 and Cell 3)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

6.5.7D.1.5 Test requirements

Table 6.5.7D.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 DL interruptions at switching across three uplink bands in TDD-TDD CA for single TAG.

Table 6.5.7D.1.5-1: Cell specific test parameters

Parameter	Unit	Cell 1	Cell2	Cell3
Frequency Range		FR1	FR1	FR1
Duplex mode		TDD	TDD	TDD
TDD configuration		TDDConf.2.1 except that S='11DL: 1GP :2UL'	TDDConf.2.1 except that S='11DL: 1GP :2UL'	TDDConf.2.2
$BW_{channel}$	MHz	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
Initial BWP Configuration		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1

DL dedicated BWP configuration		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration		SRSConf.1 in Table 6.5.7D.1.5-2	SRSConf.1 in Table 6.5.7D.1.5-2	SRSConf.2 in Table 6.5.7D.1.5-2
PDSCH RMC		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET RMC		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET RMC		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns		OP.1	OP.1	OP.1
SMTC Configuration		SMTC.1	SMTC.1	SMTC.1
SSB Configuration		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	2x2 Low
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note 2	dBm/ 15 kHz	-104	-104	-104
SS-RSRP Note 3	dBm/ SCS	-87	-87	-87
$\hat{E}_s/I_{ot}$	dB	14	14	14
$\hat{E}_s/N_{oc}$	dB	14	14	14
N_{oc} Note 2	dBm/ SCS	-101	-101	-101
Io Note3	dBm/ 38.16 MHz	-53.43	-53.43	-53.43
Time offset to Cell1 Note 4	µs	-	0	0
Propagation Condition		AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Table 6.5.7D.1.5-2: SRS Configurations

	Field	SRSConf.1	SRSConf.2
SRS-ResourceSet	srs-ResourceSetId	0	0
	srs-ResourceIdList	0	0
	resourceType	Periodic	Periodic
	Usage	Codebook	Codebook
	SRS-ResourceSetId	0	0
SRS-Resource	nrofSRS-Ports	Port1	Ports2
	transmissionComb	n2	n2

	combOffset-n2	0	0
	cyclicShift-n2	0	0
	resourceMapping startPosition	0	0
	resourceMapping nrofSymbols	n2	n2
	resourceMapping repetitionFactor	n1	n1
	freqDomainPosition	0	0
	freqDomainShift	0	0
	freqHopping c-SRS	25	25
	freqHopping b-SRS	0	0
	freqHopping b-hop	0	0
	groupOrSequenceHopping	Neither	Neither
	resourceType	Periodic	Periodic
	periodicityAndOffset-p	sl20,5	sl20,3
	sequenceId	0	0

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7D.1.5-3.

Table 6.5.7D.1.5-3: L1-RSRP absolute accuracy requirements for the reported values of CSI-RS

Normal Conditions	T1
Lowest reported value	65
Highest reported value	86

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.7D.2 NR SA FR1 DL interruptions at switching across four uplink bands in FDD-TDD CA for single TAG

6.5.7D.2.1 Test purpose

The purpose of this test is to verify DL interruption requirements during UE dynamic switching across four uplink bands for single TAG defined in TS 38.133 [6] clause 8.2.2.2.10D.

6.5.7D.2.2 Test applicability

This test applies to all types of NR UE release 18 onwards supporting of inter-band UL CA (four bands), dynamic UL Tx switching across up to 4 bands and simultaneous transmission and reception in FDD-TDD inter-band NR CA.

6.5.7D.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7D.0.

The normative reference for this requirement is TS 38.133 [6] A.6.5.7D.2

6.5.7D.2.4 Test description

The test consists of four active FR1 NR cells: PCell (Cell 1), SCell (Cell 2), SCell (Cell 3) and SCell (Cell 4), where

- Cell 1, Cell 2, Cell 3 and Cell 4 are on NR UL carrier 1 in band A, NR UL carrier 2 in band B, NR UL carrier 3 in band C and NR UL carrier 4 in band D, respectively;
- Cell 1, Cell 2, Cell 3 and Cell 4 belong to the same TAG;
- Band A and B are two different FDD bands, Band C and D are two different TDD bands;
- UE is capable to transmit with one transmitting antenna connector on Cell 1, Cell 2, Cell 3 and Cell 4, respectively;

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *UplinkTxSwitchingMoreBands-r18* is indicated to UE.

6.5.7D.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7D.2.4.1-1.

Table 6.5.7D.2.4.1-1: Supported test configurations

Config	Description
6.5.7D.2-1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 4: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7D.2.4.1-2.

Table 6.5.7D.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7D.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE link Without fader		

1. The general test parameter settings are set up according to Table 6.5.7D.2.4.1-3.
2. Message contents are defined in clause 6.5.7D.2.4.3.
3. The test scenario comprises of four NR Cells. (Cell 1, Cell 2, Cell 3 and Cell 4). Cell 1, Cell 2, Cell 3 and Cell 4 are configured according to Annex C.1.2 and C.1.3.

Table 6.5.7D.2.4.1-3: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3, 4	Four radio channels are used for this test.
Active cell		Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell Cell 4: FR1 SCell	Cell 1: FR1 PCell on RF channel 1 in band A Cell 2: FR1 SCell on RF channel 2 in band B Cell 3: FR1 SCell on RF channel 3 in band C Cell 4: FR1 SCell on RF channel 4 in band D
CP length		Normal	
DRX		OFF	
Measurement gap pattern Id		OFF	
Filter coefficient		0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.1.5 FDD Cell 3: CSI-RS.2.5 TDD Cell 4: CSI-RS.2.5 TDD	
T1	s	5	

6.5.7D.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS transmits an *RRCReconfiguration* message with *UplinkTxSwitchingMoreBands-r18* to the UE to configure Cell 2, Cell 3 and Cell 4 as SCells according to Table 6.5.7D.2.5-1.
3. The UE shall transmit an *RRCReconfigurationComplete* message.
4. The SS activates Cell 2, Cell 3 and Cell 4.
5. Set the parameters according to T1 in Table 6.5.7D.2.4.1-3 and Table 6.5.7D.2.5-1. Propagation conditions are set according to Annex C clauses C.2.2. T1 starts.
6. For Cell 1 and Cell 2, the SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boost of 6dB on the following symbol in the slot overlapping with the 1st special slot of every radio frame of Cell 3:
   - symbol #12 if UE does not report *uplinkTxSwitching-DL-Interruption-r18*;
   - otherwise,
     - symbol #8 if UE capability uplink Tx switching period is 210 us, or
     - symbol #9 if UE capability uplink Tx switching period is 140us, or
     - symbol #10 if UE capability uplink Tx switching period is 35us.
7. For Cell 3 and Cell 4, the SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boost of 6dB on the following symbol in the 2nd special slot of every radio frame:
   - symbol #10 if UE does not report *uplinkTxSwitching-DL-Interruption-r18*;
   - otherwise,
     - symbol #4 if UE capability uplink Tx switching period is 210 us, or
     - symbol #5 if UE capability uplink Tx switching period is 140us, or
     - symbol #8 if UE capability uplink Tx switching period is 35us.
8. If the UE sends L1-RSRP report containing valid L1-RSRP results for Cell 1, Cell 2, Cell 3 and Cell 4 and each L1-RSRP result meet the test requirements given in Table 6.5.7D.2.5-3, increase the number of passed iterations by one otherwise increase the number of failed iterations by one.
9. SS transmits in Cell 1 an *RRCReconfiguration* message to release all SCells and ensures UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the reconfiguration fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5)

   or

   switches off and on the UE and ensures UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
10. Repeat step 2-9 until a test verdict has been achieved.

6.5.7D.2.4.3 Message contents

Table 6.5.7D.2.4.3-1: Common Exception messages for NR SA FR1 DL interruptions at switching across four uplink bands in FDD-TDD CA for single TAG

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-2 with condition 1T1T-1T1T
Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 1T1T-1T1T Table H.3.11-4 with condition FDD and SwitchFrom Table H.3.11-5 with condition FDD-TDD and SwitchFrom

Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 1T1T-1T1T Table H.3.11-4 with condition FDD and SwitchFrom Table H.3.11-5 with condition FDD-TDD and SwitchFrom
Cell-specific messages and information elements contents exceptions for Cell 3	Table H.3.11-3 with condition 1T1T-1T1T Table H.3.11-4 with condition TDD and SwitchTo Table H.3.11-5 with condition FDD-TDD and SwitchTo Table H.3.11-11
Cell-specific messages and information elements contents exceptions for Cell 4	Table H.3.11-3 with condition 1T1T-1T1T Table H.3.11-4 with condition TDD and SwitchTo Table H.3.11-5 with condition FDD-TDD and SwitchTo Table H.3.11-11

Table 6.5.7D.2.4.3-2: Physical layer parameters for DCI format 0_1 (Test procedure, step 6 & step 7, Cell 1, Cell 2, Cell 3 and Cell 4)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

6.5.7D.2.5 Test requirements

Table 6.5.7D.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 DL interruptions at switching across four uplink bands in FDD-TDD CA for single TAG.

Table 6.5.7D.2.5-1: Cell specific test parameters

Frequency Range		FR1	FR1	FR1	FR1
Duplex mode		FDD	FDD	TDD	TDD
TDD configuration		N/A	N/A	TDDConf.2.1 except that: S='11DL: 1GP:2UL';	TDDConf.2.1 except that: S='11DL: 1GP:2UL';
$BW_{channel}$	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
Initial BWP Configuration		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration		SRSConf.1 in Table 6.5.7D.2.5-2	SRSConf.1 in Table 6.5.7D.2.5-2	SRSConf.2 in Table 6.5.7D.2.5-2	SRSConf.2 in Table 6.5.7D.2.5-2
PDSCH Reference measurement channel		SR.1.1 FDD	SR.1.1 FDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters		CR.1.1 FDD	CR.1.1 FDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters		CCR.1.1 FDD	CCR.1.1 FDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC Configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
SSB Configuration		SSB.1 FR1	SSB.1 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low	1x2 Low
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 2	dBm/15 kHz	-104	-104	-104	-104
SS-RSRP Note 3	dBm/ SCS	-87	-87	-87	-87
$\hat{E}_s/I_{ot}$	dB	17	17	14	14
$\hat{E}_s/N_{oc}$	dB	17	17	14	14
N_{oc} Note 2	dBm/ SCS	-104	-104	-101	-101

Io[Note3]	dBm/9.36 MHz	-56.58	-56.58	-	-
	dBm/38.16 MHz	-	-	-53.43	-53.43
Time offset to Cell1 Note 4	µs	-	0	0	0
Propagation Condition		AWGN	AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Table 6.5.7D.2.5-2: SRS Configurations

	Field	SRSConf.1	SRSConf.2
SRS-ResourceSet	srs-ResourceSetId	0	0
	srs-ResourceIdList	0	0
	resourceType	Periodic	Periodic
	Usage	Codebook	Codebook
	SRS-ResourceSetId	0	0
SRS-Resource	nrofSRS-Ports	Port1	Port1
	transmissionComb	n2	n2
	combOffset-n2	0	0
	cyclicShift-n2	0	0
	resourceMapping startPosition	0	0
	resourceMapping nrofSymbols	n2	n2
	resourceMapping repetitionFactor	n1	n1
	freqDomainPosition	0	0
	freqDomainShift	0	0
	freqHopping c-SRS	14	25
	freqHopping b-SRS	0	0
	freqHopping b-hop	0	0
	groupOrSequenceHopping	Neither	Neither
	resourceType	Periodic	Periodic
	periodicityAndOffset-p	sl10,6	sl20,3
	sequenceId	0	0

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7D.2.5-3.

Table 6.5.7D.2.5-3: L1-RSRP absolute accuracy requirements for the reported values of CSI-RS

Normal Conditions	T1
Lowest reported value	65
Highest reported value	86

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.7D.3 NR SA FR1 DL interruptions at switching across three uplink bands in FDD-TDD CA for two TAGs

6.5.7D.3.1 Test purpose

The purpose of this test is to verify DL interruption requirements during UE dynamic switching across 3 bands with one or two transmit antenna connectors for two TAGs defined in TS 38.133 [6] clause 8.2.2.2.10D.

6.5.7D.3.2 Test applicability

This test applies to all types of NR UE release 18 onwards supporting of inter-band UL CA (three bands), dynamic UL Tx switching across up to 4 bands, simultaneous transmission and reception in FDD-TDD inter-band NR CA and at least two TAGs.

6.5.7D.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7D.0.

The normative reference for this requirement is TS 38.133 [6] A.6.5.7D.3

6.5.7D.3.4 Test description

The test consists of three active FR1 NR cells: PCell (Cell 1), SCell (Cell 2) and SCell (Cell 3), where

- Cell 1, Cell 2 and Cell 3 are on NR UL carrier 1 in band A, NR UL carrier 2 in band B and NR UL carrier 3 in band C, respectively;
- Cell 1 and Cell 2 belong to one TAG, and Cell 3 belongs to the other TAG;
- Band A and B are two different FDD bands, Band C is a TDD band.
- UE is capable to transmit with one, one and two transmitting antenna connector(s) on Cell 1, Cell 2 and Cell 3, respectively;

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *UplinkTxSwitchingMoreBands-r18* is indicated to UE.

6.5.7D.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7D.3.4.1-1.

Table 6.5.7D.3.4.1-1: Supported test configurations

Config	Description
6.5.7D.3-1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7D.3.4.1-2.

Table 6.5.7D.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7D.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2 for Cell 1 and Cell 2, A.3.1.8.2a for Cell 3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE link Without fader		

1. The general test parameter settings are set up according to Table 6.5.7D.3.4.1-3.

2. Message contents are defined in clause 6.5.7D.3.4.3.

3. The test scenario comprises of three NR Cells. (Cell 1, Cell 2 and Cell 3). Cell 1, Cell 2 and Cell 3 are configured according to Annex C.1.2 and C.1.3.

Table 6.5.7D.3.4.1-3: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	Three radio channels are used for this test.
Active cell		Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2 FR1 SCell on RF channel number 3
CP length		Normal	
DRX		OFF	
Measurement gap pattern Id		OFF	
Filter coefficient		0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Cell 1: CSI-RS.1.5 TDD Cell 2: CSI-RS.1.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	5	

6.5.7D.3.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS transmits an *RRCReconfiguration* message with *UplinkTxSwitchingMoreBands-r18* to the UE to configure Cell 2 and Cell 3 as SCells according to Table 6.5.7D.3.5-1.

3. The UE shall transmit an *RRCReconfigurationComplete* message.

4. The SS activates Cell 2 and Cell 3.

5. Set the parameters according to T1 in Table 6.5.7D.3.4.1-3 and Table 6.5.7D.3.5-1. Propagation conditions are set according to Annex C clauses C.2.2. T1 starts.

6. For Cell 1 and Cell 2, the SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boost of 6dB on the following symbol in slot overlapping with the 1st special slot of every radio frame of the NR TDD carrier (Cell 3):

   - symbol #12 if UE does not report *uplinkTxSwitching-DL-Interruption-r18*;
   - otherwise,
     - symbol #8 if UE capability uplink Tx switching period is 210 us, or
     - symbol #9 if UE capability uplink Tx switching period is 140us, or
     - symbol #10 if UE capability uplink Tx switching period is 35us.

7. For Cell 3, the SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boost of 6dB on the following symbol in the 2nd special slot of every radio frame:

   - symbol #10 if UE does not report *uplinkTxSwitching-DL-Interruption-r18*;
   - otherwise,
     - symbol #3 if UE capability uplink Tx switching period is 210 us, or

- symbol #5 if UE capability uplink Tx switching period is 140us, or
- symbol #8 if UE capability uplink Tx switching period is 35us.

8. If the UE sends L1-RSRP report containing valid L1-RSRP results for Cell 1, Cell 2 and Cell 3 and each L1-RSRP result meet the test requirements given in Table 6.5.7D.3.5-3, increase the number of passed iterations by one otherwise increase the number of failed iterations by one.

9. SS transmits in Cell 1 an *RRCReconfiguration* message to release all SCells and ensures UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the reconfiguration fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5)

   or

   switches off and on the UE and ensures UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until a test verdict has been achieved.

6.5.7D.3.4.3 Message contents

Table 6.5.7D.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-2 with condition 1T1T-2T and DualTAGS
Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 1T1T-2T Table H.3.11-4 with condition FDD and SwitchFrom Table H.3.11-5 with condition FDD-TDD and SwitchFrom
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 1T1T-2T Table H.3.11-4 with condition FDD and SwitchFrom Table H.3.11-5 with condition FDD-TDD and SwitchFrom
Cell-specific messages and information elements contents exceptions for Cell 3	Table H.3.11-3 with condition 1T1T-2T and 2ND_TAG Table H.3.11-4 with condition TDD, SwitchTo and 2TX Table H.3.11-5 with condition FDD-TDD and SwitchTo Table H.3.11-11

Table 6.5.7D.3.4.3-2: Physical layer parameters for DCI format 0_1 (Test procedure, step 6 & step 7, Cell 1, Cell 2 and Cell 3)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

6.5.7D.3.5 Test requirements

Table 6.5.7D.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 DL interruptions at switching across three uplink bands in FDD-TDD CA for two TAGs.

Table 6.5.7D.3.5-1: Cell specific test parameters

Parameter	Unit	Cell 1	Cell2	Cell3
Frequency Range		FR1	FR1	FR1
Duplex mode		FDD	FDD	TDD
TDD configuration		N/A	N/A	TDDConf.2.1 except that S='11DL: 1GP :2UL'
$BW_{channel}$	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106

Initial BWP Configuration		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration		SRSConf.1 in Table 6.5.7D.3.5-2	SRSConf.1 in Table 6.5.7D.3.5-2	SRSConf.2 in Table 6.5.7D.3.5-2
PDSCH RMC		SR.1.1 FDD	SR.1.1 FDD	SR.2.1 TDD
RMSI CORESET RMC		CR.1.1 FDD	CR.1.1 FDD	CR.2.1 TDD
Dedicated CORESET RMC		CCR.1.1 FDD	CCR.1.1 FDD	CCR.2.1 TDD
OCNG Patterns		OP.1	OP.1	OP.1
SMTC Configuration		SMTC.1	SMTC.1	SMTC.1
SSB Configuration		SSB.1 FR1	SSB.1 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	2x2 Low
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note 2	dBm/ 15 kHz	-104	-104	-104
SS-RSRP Note 3	dBm/ SCS	-87	-87	-87
$\hat{E}_s/I_{ot}$	dB	17	17	14
$\hat{E}_s/N_{oc}$	dB	17	17	14
N_{oc} Note 2	dBm/ SCS	-104	-104	-101
Io Note3	dBm/9.36 MHz	-56.58	-56.58	N/A
	dBm/ 38.16 MHz	N/A	N/A	-53.43
Time offset to Cell1 Note 4	µs	-	0	9
Propagation Condition		AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Table 6.5.7D.3.5-2: SRS Configurations

	Field	SRSConf.1	SRSConf.2
SRS-ResourceSet	srs-ResourceSetId	0	0
	srs-ResourceIdList	0	0
	resourceType	Periodic	Periodic

	Usage	Codebook	Codebook
	SRS-ResourceSetId	0	0
SRS-Resource	nrofSRS-Ports	Port1	Ports2
	transmissionComb	n2	n2
	combOffset-n2	0	0
	cyclicShift-n2	0	0
	resourceMapping startPosition	0	0
	resourceMapping nrofSymbols	n2	n2
	resourceMapping repetitionFactor	n1	n1
	freqDomainPosition	0	0
	freqDomainShift	0	0
	freqHopping c-SRS	14	25
	freqHopping b-SRS	0	0
	freqHopping b-hop	0	0
	groupOrSequenceHopping	Neither	Neither
	resourceType	Periodic	Periodic
	periodicityAndOffset-p	sl10,6	sl20,3
	sequenceId	0	0

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7D.3.5-3.

Table 6.5.7D.3.5-3: L1-RSRP absolute accuracy requirements for the reported values of CSI-RS

Normal Conditions	T1
Lowest reported value	65
Highest reported value	86

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.5.7D.4 NR SA FR1 DL interruptions at switching across four uplink bands in TDD-TDD CA for two TAGs

6.5.7D.4.1 Test purpose

The purpose of this test is to verify DL interruption requirements during UE dynamic switching across four uplink bands for two TAGs defined in TS 38.133 [6] clause 8.2.2.2.10D.

6.5.7D.4.2 Test applicability

This test applies to all types of NR UE release 18 onwards supporting of inter-band UL CA (four bands), dynamic UL Tx switching across up to 4 bands, and simultaneous transmission and reception in TDD-TDD inter-band NR CA and at least two TAGs.

6.5.7D.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.7D.0.

The normative reference for this requirement is TS 38.133 [6] A.6.5.7D.4

6.5.7D.4.4 Test description

The test consists of four active FR1 NR cells: PCell (Cell 1), SCell (Cell 2), SCell (Cell 3) and SCell (Cell 4), where

- Cell 1, Cell 2, Cell 3 and Cell 4 are on NR UL carrier 1 in band A, NR UL carrier 2 in band B, NR UL carrier 3 in band C and NR UL carrier 4 in band D, respectively;
- Cell 1 and Cell 2 belong to one TAG, and Cell 3 and Cell 4 belong to the other TAG;
- Band A, B, C and D are four different TDD bands.

- UE is capable to transmit with one transmitting antenna connector on Cell 1, Cell 2, Cell 3 and Cell 4, respectively;

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *UplinkTxSwitchingMoreBands-r18* is indicated to UE.

6.5.7D.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.7D.4.4.1-1.

Table 6.5.7D.4.4.1-1: Supported test configurations

Config	Description
6.5.7D.4-1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 4: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.5.7D.4.4.1-2.

Table 6.5.7D.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.7D.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE link Without Fader		

1. The general test parameter settings are set up according to Table 6.5.7D.4.4.1-3.

2. Message contents are defined in clause 6.5.7D.4.4.3.

3. The test scenario comprises of four NR Cells. (Cell 1, Cell 2, Cell 3 and Cell 4). Cell 1, Cell 2, Cell 3 and Cell 4 are configured according to Annex C.1.2 and C.1.3.

Table 6.5.7D.4.4.1-3: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3, 4	Four radio channels are used for this test.
Active cell		Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell Cell 4: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2 FR1 SCell on RF channel number 3 FR1 SCell on RF channel number 4
CP length		Normal	
DRX		OFF	
Measurement gap pattern Id		OFF	
Filter coefficient		0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD Cell 4: CSI-RS.2.5 TDD	
T1	s	5	

6.5.7D.4.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. The SS transmits an *RRCReconfiguration* message with *UplinkTxSwitchingMoreBands-r18* to the UE to configure Cell 2, Cell 3 and Cell 4 as SCells according to Table 6.5.7D.4.5-1.
3. The UE shall transmit an *RRCReconfigurationComplete* message.
4. The SS activates Cell 2, Cell 3 and Cell 4.
5. Set the parameters according to T1 in Table 6.5.7D.4.4.1-3 and Table 6.5.7D.4.5-1. Propagation conditions are set according to Annex C clauses C.2.2. T1 starts.
6. For Cell 1 and Cell 2, the SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boost of 6dB on the following symbol in the 1st special slot of every even radio frame:
   - symbol #10 if UE does not report *uplinkTxSwitching-DL-Interruption-r18*;
   - otherwise,
     - symbol #3 if UE capability uplink Tx switching period is 210 us, or
     - symbol #5 if UE capability uplink Tx switching period is 140us, or
     - symbol #8 if UE capability uplink Tx switching period is 35us.
7. For Cell 3 and Cell 4, the SS triggers aperiodic CSI-RS for L1-RSRP reporting with power boost of 6dB on the following symbol in the 2nd special slot of every even radio frame:
   - symbol #10 if UE does not report *uplinkTxSwitching-DL-Interruption-r18*;
   - otherwise,
     - symbol #3 if UE capability uplink Tx switching period is 210 us, or
     - symbol #5 if UE capability uplink Tx switching period is 140us, or
     - symbol #8 if UE capability uplink Tx switching period is 35us.
8. If the UE sends L1-RSRP report containing valid L1-RSRP results for Cell 1, Cell 2, Cell 3 and Cell 4 and each L1-RSRP result meet the test requirements given in Table 6.5.7D.4.5-3, increase the number of passed iterations by one otherwise increase the number of failed iterations by one.
9. SS transmits in Cell 1 an *RRCReconfiguration* message to release all SCells and ensures UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the reconfiguration fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5)

   or

   switches off and on the UE and ensures UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
10. Repeat step 2-9 until a test verdict has been achieved.

6.5.7D.4.4.3 Message contents

Table 6.5.7D.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.11-2 with condition 1T1T-1T1T and DualTAGS

Cell-specific messages and information elements contents exceptions for Cell 1	Table H.3.11-3 with condition 1T1T-1T1T Table H.3.11-4 with condition TDD and SwitchFrom Table H.3.11-5 with condition TDD-TDD and SwitchFrom Table H.3.11-11
Cell-specific messages and information elements contents exceptions for Cell 2	Table H.3.11-3 with condition 1T1T-1T1T Table H.3.11-4 with condition TDD and SwitchFrom Table H.3.11-5 with condition TDD-TDD and SwitchFrom Table H.3.11-11
Cell-specific messages and information elements contents exceptions for Cell 3	Table H.3.11-3 with condition 1T1T-1T1T and 2ND_TAG Table H.3.11-4 with condition TDD and SwitchTo Table H.3.11-5 with condition TDD-TDD and SwitchTo TS 38.508-1 [14] Table 7.3.1-1 with condition TDDConf.2.2
Cell-specific messages and information elements contents exceptions for Cell 4	Table H.3.11-3 with condition 1T1T-1T1T and 2ND_TAG Table H.3.11-4 with condition TDD and SwitchTo Table H.3.11-5 with condition TDD-TDD and SwitchTo TS 38.508-1 [14] Table 7.3.1-1 with condition TDDConf.2.2

Table 6.5.7D.4.4.3-2: Physical layer parameters for DCI format 0_1 (Test procedure, step 6 & step 7, Cell 1, Cell 2, Cell 3 and Cell 4)

Derivation Path: 38.508-1[14] Table 4.3.6.1.1.2-1			
Parameter	**Value**	**Value in binary**	**Condition**
CSI request	First entry in CSI-AperiodicTriggerStateList	"1"	

6.5.7D.4.5 Test requirements

Table 6.5.7D.4.5-1 defines the primary level settings including test tolerances for NR SA FR1 DL interruptions at switching across four uplink bands in TDD-TDD CA for two TAGs.

Table 6.5.7D.4.5-1: Cell specific test parameters

Parameter	Unit	Cell 1	Cell2	Cell3	Cell4
Frequency Range		FR1	FR1	FR1	FR1
Duplex mode		TDD	TDD	TDD	TDD
TDD configuration		TDDConf.2.1 except that S='11DL: 1GP :2UL'	TDDConf.2.1 except that S='11DL: 1GP :2UL'	TDDConf.2.2	TDDConf.2.2
$BW_{channel}$	MHz	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
Initial BWP Configuration		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration		SRSConf.1 in Table 6.5.7D.4.5-2	SRSConf.1 in Table 6.5.7D.4.5-2	SRSConf.2 in Table 6.5.7D.4.5-2	SRSConf.2 in Table 6.5.7D.4.5-2
PDSCH RMC		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET RMC		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET RMC		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC Configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
SSB Configuration		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low	1x2 Low
EPRE ratio of PSS to SSS	dB	0	0	0	0

EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note 2	dBm/ 15 kHz	-104	-104	-104	-104
SS-RSRP Note 3	dBm/ SCS	-87	-87	-87	-87
$\hat{E}_s/I_{ot}$	dB	14	14	14	14
$\hat{E}_s/N_{oc}$	dB	14	14	14	14
N_{oc} Note 2	dBm/ SCS	-101	-101	-101	-101
Io Note3	dBm/ 38.16 MHz	-53.43	-53.43	-53.43	-53.43
Time offset to Cell1 Note 4	µs	-	0	9	9
Propagation Condition		AWGN	AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

Table 6.5.7D.4.5-2: SRS Configurations

	Field	SRSConf.1	SRSConf.2
SRS-ResourceSet	srs-ResourceSetId	0	0
	srs-ResourceIdList	0	0
	resourceType	Periodic	Periodic
	Usage	Codebook	Codebook
	SRS-ResourceSetId	0	0
SRS-Resource	nrofSRS-Ports	Port1	Port1
	transmissionComb	n2	n2
	combOffset-n2	0	0
	cyclicShift-n2	0	0
	resourceMapping startPosition	0	0
	resourceMapping nrofSymbols	n2	n2
	resourceMapping repetitionFactor	n1	n1
	freqDomainPosition	0	0
	freqDomainShift	0	0

	freqHopping c-SRS	25	25
	freqHopping b-SRS	0	0
	freqHopping b-hop	0	0
	groupOrSequenceHopping	Neither	Neither
	resourceType	Periodic	Periodic
	periodicityAndOffset-p	sl20,5	sl20,3
	sequenceId	0	0

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.5.7D.4.5-3.

Table 6.5.7D.4.5-3: L1-RSRP absolute accuracy requirements for the reported values of CSI-RS

Normal Conditions	T1
Lowest reported value	65
Highest reported value	86

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.6.5.8 UE specific CBW change

6.5.8.0 Minimum conformance requirements

6.5.8.0.1 Minimum conformance requirements for UE specific CBW change

The requirements in this clause apply for a UE receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on the DL BWP with BWP ID firstActiveDownlinkBWP-Id or transmit PUSCH on the UL BWP with BWP ID firstActiveUplinkBWP-Id of the new CBW right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

- DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and
- $T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in millisecond as defined in TS 36.331 [29] clause 11.2 is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in millisecond as defined in TS 38.331 [13] clause 12, and
- $T_{CBWchangeDelayRRC} = 6\,ms$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ on the cell where UE-specific CBW change occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

The normative reference for this requirement is TS 38.133 [6] clause 8.13.1 and 8.13.2.

6.5.8.1 UE specific CBW change on PCell in FR1 in non-DRX

6.5.8.1.1 Test purpose

To verify the UE specific CBW change delay requirement defined in 38.133 [6] clause 8.13.

6.5.8.1.2 Test applicability

This test applies to all types of NR UEs from Release 16 onwards.

6.5.8.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.8.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.5.8.1.

6.5.8.1.4 Test description

The test scenario comprises of one Cell, PCell (Cell 1), which has constant signal levels throughout the test. The test consists of 1 time period with duration of T1.

During T1 the TE sends an *RRCReconfiguration* message containing *SCS-SpecificCarrier* to reconfigure UE-specific CBW. The test equipment verifies the UE specific CBW switching delay in PCell by estimating the time from the moment the *RRCReconfiguration* message including updated UE-specific CBW configuration is sent to the moment a valid ACK/NACK is received.

6.5.8.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.5.8.1.4.1-1.

Table 6.5.8.1.4.1-1: Supported test configurations

Configuration	Description
6.5.8.1-1	FDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.8.1-2	TDD duplex mode, 15 kHz SSB SCS, 10MHz bandwidth
6.5.8.1-3	TDD duplex mode, 30 kHz SSB SCS, 40MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 6.5.8.1.4.1-2.

Table 6.5.8.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.5.8.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

1. The general test parameter settings are set up according to Table 6.5.8.1.4.1-3.

2. Message contents are defined in clause 6.5.8.1.4.3.

3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.5.8.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

6.5.8.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. UE has been configured with

UE specific CBW (CBW-1), initial BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP.

2. The SS starts sending PDCCHs indicating new transmissions continuously on Cell 1.

3. The SS sends an *RRCReconfiguration* message containing *SCS-SpecificCarrier* with updated UE specific CBW (CBW-2), dedicated BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP.

4. T1 starts from the beginning of slot i, where slot i is the last slot carrying the PDSCH containing the *RRCReconfiguration* message in step 3.

5 If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$, then the number of successful tests is increased by one.
Otherwise, the number of failure tests is increased by one.

6. After the SS receives the ACK/NACK in step 5 or when T1 expires, the SS shall

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   or

   - switch the UE off.

7. Depending on the choice in step 6, the SS shall,

   - transmit in NR Cell 1 a *Paging* message including matched ng-5G-S-TMSI for the UE if an *RRCRelease* has been sent in step 6. If the paging fails, switches off and on the UE,

   or

   - switch on the UE if the UE is switched off in step 6.

8. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. UE has been configured with UE specific CBW (CBW-1), initial BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.5.8.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.5.8.1.4.3-1:*ServingCellConfigCommon* (step 1, 3 and 8, test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-168			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon::= SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
genericParameters	Set according to DLBWP.0.2		
}			
uplinkConfigCommon SEQUENCE {			
initialUplinkBWP SEQUENCE {	BWP-UplinkCommon		
genericParameters	Set according to ULBWP.0.2		
}			
}			
}			

Table 6.5.8.1.4.3-2: *ServingCellConfig* (step 1, 3 and 8, test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			

uplinkConfig SEQUENCE {			
uplinkChannelBW-PerSCS-List SEQUENCE (SIZE (1..maxSCSs)) OF SCS-SpecificCarrier {	1 entry		
SCS-SpecificCarrier[1]	SCS-SpecificCarrier-UL	Entry 1 Table 6.5.8.1.4.3-4	
}			
}			
downlinkChannelBW-PerSCS-List SEQUENCE (SIZE (1..maxSCSs)) OF SCS-SpecificCarrier {	1 entry		
SCS-SpecificCarrier[1]	SCS-SpecificCarrier-DL	Entry 1 Table 6.5.8.1.4.3-3	
}			
}			

Table 6.5.8.1.4.3-3: *SCS-SpecificCarrier-DL* (Table 6.5.8.1.4.3-2)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-160			
Information Element	**Value/remark**	**Comment**	**Condition**
SCS-SpecificCarrier ::= SEQUENCE {			
offsetToCarrier	The offset between point A and the lowest PRB index to guarantee the CBW including SSB and CORESET#0	CBW-1 (DLCBW.1.1)	step 1 or step 8
	The offset between Point A and the lowest usable subcarrier on this carrier, i.e. the offsetToCarrier given in 38.508-1[14] clause 4.3.1.	CBW-2 (DLCBW.1.2)	step 3
}			

Table 6.5.8.1.4.3-4: *SCS-SpecificCarrier-UL* (Table 6.5.8.1.4.3-2)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-160			
Information Element	**Value/remark**	**Comment**	**Condition**
SCS-SpecificCarrier ::= SEQUENCE {			
offsetToCarrier	Any offset within the CBW of test frequency given in 38.508-1[14] clause 4.3.1.and different with offsetToCarrier of ULCBW.1.2	CBW-1 (ULCBW.1.1)	step 1 or step 8
	The offset between Point A and the lowest usable subcarrier on this carrier, i.e. the offsetToCarrier given in 38.508-1[14] clause 4.3.1.	CBW-2 (ULCBW.1.2)	step 3
}			

6.5.8.1.5 Test requirement

Tables 6.5.8.1.4.1-3 and 6.5.8.1.5-1 define the primary level settings including test tolerances.

Table 6.5.8.1.5-1: NR Cell specific test parameters

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable

		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1		10 MHz: $N_{RB,c}$ = 52
		Config 2		10 MHz: $N_{RB,c}$ = 52
		Config 3		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID		Config 1,2, 3		0
Initial DL BWP Configuration (BWP-1)		Config 1,2, 3		DLBWP.0.2
Initial UL BWP Configuration (BWP-1)		Config 1,2, 3		ULBWP.0.2
Initial Condition	Active DL CBW Configureation (CBW-1)	Config 1, 2, 3		DLCBW.1.1
	Active UL CBW Configuration (CBW-1)	Config 1, 2, 3		ULCBW.1.1
Final Condition	Active DL CBW Configureation (CBW-2)	Config 1, 2, 3		DLCBW.1.2
	Active UL CBW Configuration (CBW-2)	Config 1, 2, 3		ULCBW.1.2
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR2.1 TDD
RMSI CORESET parameters		Config 1		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR2.1 TDD
Dedicated CORESET parameters		Config 1		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2		SSB.1 FR1
		Config 3		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		Config 1,2	dBm/SCS	-104
		Config 3		-101
SS-RSRP Note 3		Config 1,2	dBm/SCS	-87
		Config 3		-84
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
Io Note3		Config 1,2	dBm/ 9.36MHz	-58.96
		Config 3	dBm/ 38.16MHz	-52.86

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.1 is linked with ULBWP.0.1; DLBWP.1.1 is linked with ULBWP.1.1; as defined in clause 12 of TS 38.213 [3].

During T1, the UE shall be ready for the reception of uplink grant for the PCell from the first DL slot that occurs right after the beginning of slot $i + \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in TS 38.213.

All of the above test requirements shall be fulfilled in order for the observed UE specific CBW change delay on the PCell to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

6.6 Measurement procedures

6.6.1 Intra-frequency measurements

6.6.1.0 Minimum conformance requirements

6.6.1.0.1 Minimum conformance requirements for event-triggered measurement without gap

Same as 4.6.1.0.1

6.6.1.0.2 Minimum conformance requirements for event-triggered measurement with gap

[TS 38.133 [6], clause 9.2.6.2, 9.2.6.3]

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} \quad ms$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 6.6.1.0.2-1.

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 6.6.1.0.2-2.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in TS 38.133 [6] section 9.1.5.2.2 for measurement within outside measurement gaps.

Table 6.6.1.0.2-1: Time period for PSS/SSS detection (Frequency range FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, 5 x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x 5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle > 320ms	5 x max(MGRP, DRX cycle) x $CSSF_{intra}$

Table 6.6.1.0.2-2: Measurement period for intra-frequency measurements with gaps (Frequency Range FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, 5 x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x max(MGRP, DRX cycle) x $CSSF_{intra}$

[TS 38.133 [6], clause 9.2.2]

The requirements given above apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] sections 10.1.2 are fulfilled for a corresponding Band,
- SS-RSRQ related side conditions given in TS 38.133 [6] sections 10.1.7 are fulfilled for a corresponding Band,

- SS-SINR related side conditions given in TS 38.133 [6] Sections 10.1.12 are fulfilled for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.2 for a corresponding Band.

[TS 38.133 [6], clause 9.2.4.2]

The RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clauses 10.1.2.1.1 and 10.1.2.1.2, the RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clauses 10.1.7.1.1, and the SINR measurement accuracy for all measured cells shall be as specified in the TS 38.133 [6] clause 10.1.12.1.1.

Reported RSRP, RSRQ and SINR measurements contained in event triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.1.2.1.1, 10.1.2.1.2, 10.1.7.1.1 and 10.1.12.1.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify_intra_without_index}$ defined in TS 38.133 [6] section 9.2.6.2. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clauses 9.2.2, 9.2.4.2, 9.2.6.2 and 9.2.6.3.

6.6.1.0.3 Void

6.6.1.0.4 Minimum conformance requirements for event-triggered measurement with gap with SSB index reading

[TS 38.133 [6], clause 9.2.6.2, 9.2.6.3]

UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index}$.

$$T_{identify_intra_with_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}\ ms$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 6.6.1.0.4-1.

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in table 6.6.1.0.4-2.

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 6.6.1.0.4-3.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,\ i}$ in TS 38.133 section 9.1.5.2.2 for measurement conducted within measurement gaps.

When intrafrequency SMTC is fully non overlapping with measurement gaps or intrafrequency SMTC is fully overlapping with MGs, K_p=1

When intrafrequency SMTC is partially overlapping with measurement gaps, K_p = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP.

Table 6.6.1.0.4-1: Time period for PSS/SSS detection (Frequency range FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, 5 x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x 5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	[5] x max(MGRP, DRX cycle) x $CSSF_{intra}$

Table 6.6.1.0.4-2: Time period for time index detection (Frequency range FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil (1.5 x 3 x K_p) x max(SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(3 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 6.6.1.0.4-3: Measurement period for intra-frequency measurements with gaps (Frequency Range FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, 5 x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x max(MGRP, DRX cycle) x $CSSF_{intra}$

[TS 38.133 [6], clause 9.2.2]

The requirements given above apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] sections 10.1.2 are fulfilled for a corresponding Band,
- SS-RSRQ related side conditions given in TS 38.133 [6] sections 10.1.7 are fulfilled for a corresponding Band,
- SS-SINR related side conditions given in TS 38.133 [6] sections 10.1.12 are fulfilled for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.2 for a corresponding Band.

[TS 38.133 [6], clause 9.2.4.2]

The RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clauses 10.1.2.1.1 and 10.1.2.1.2, the RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clauses 10.1.7.1.1, and the SINR measurement accuracy for all measured cells shall be as specified in the TS 38.133 [6] clause 10.1.12.1.1.

Reported RSRP, RSRQ and SINR measurements contained in event triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.1.2.1.1, 10.1.2.1.2, 10.1.7.1.1 and 10.1.12.1.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than Tidentify_intra_with_index defined in TS 38.133 [6] section 9.2.6.2. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clauses 9.2.2, 9.2.4.2, 9.2.6.2 and 9.2.6.3.

6.6.1.0.5 Void

6.6.1.0.6 Minimum conformance requirements for event-triggered measurement with MUSIM gap configured

[TS 38.133 [6], clause 9.1.10]

If the UE requires gap patterns for MUSIM purpose, the network may provide one or more per-UE MUSIM gap pattern(s) for concurrent monitoring of all frequency layers for MUSIM via *MUSIM-GapConfig* [13]. The UE can be configured with no more than three periodic MUSIM gap patterns and/or one aperiodic MUSIM gap pattern for MUSIM via MUSIM-GapConfig [13]. The MUSIM gap patterns specified in Table 6.6.1.0.6-1 are applicable only for MUSIM operation.

The UE is not required to perform cell identification and measurement, paging monitoring, SIB acquisition, and/or on-demand SI request of the target cell in the target network that is outside the MUSIM gaps.

The UE is not required to conduct reception or transmission from or to the [source] network during MUSIM gaps that are not dropped due to collisions, as defined in TS 38.133 [6] clauses 9.1.10.4 and 9.1.10.5.

UE supporting MUSIM capability shall support the MUSIM gap patterns listed in Table 6.6.1.0.6-1 based on UE's capability specified in TS38.306[11] and the applicability specified in Table 6.6.1.0.6-2.

UE determines MUSIM gap timing based on gap offset configuration from serving cell provided by higher layer signalling as specified in TS 38.331 [13].

Table 6.6.1.0.6-1: MUSIM Gap Pattern Configurations

MUSIM Gap Pattern Id	MUSIM Gap Length (MGL, ms)	MUSIM Gap Repetition Period (MGRP, ms)
0	6	40
1	6	80
2	3	40
3	3	80
4	6	20
5	6	160
6	4	20
7	4	40
8	4	80
9	4	160
10	3	20
11	3	160
12	10	80
13	20	160
14	6	320
15	6	640
16	6	1280
17	6	2560
18	10	320
19	10	640
20	10	1280
21	10	2560
22	20	320
23	20	640
24	20	1280
25	20	2560
26	20	5120
27	10	NA
28	20	NA
NOTE 1: Measurement gap pattern #27, #28 are the aperiodic gap pattern without MGRP.		

Table 6.6.1.0.6-2: Applicability for MUSIM Gap Pattern Configurations supported by the UE with NR standalone operation (with single carrier, NR CA configuration)

MUSIM gap pattern configuration	Serving cell	Gap Purpose	Applicable MUSIM Gap Pattern Id
Per-UE MUSIM gap	FR1, FR2, or FR1 + FR2	MUSIM Note1	0-13, 14-26, 27, 28
NOTE 1: Inclusion of MUSIM procedures for per-UE MUSIM gaps only in NR single carrier, NR CA mode: MUSIM purpose which includes cell identification and measurement, paging monitoring, SIB acquisition, and/or on-demand SI request of the target cell in the target network.			

[TS 38.133 [6], clause 9.1.10.2]

Priority levels are applied for each periodic MUSIM gap. A UE shall request a priority for all requested periodic MUSIM gaps when the UE requests MUSIM gaps via *MUSIM-GapConfig-r17* [13]. The UE shall request different priority level for each periodic MUSIM gaps. The network may assign priority to each periodic MUSIM gaps. The allocated priorities may differ from the priorities requested by the UE. The UE MUSIM requirements apply if the configured MUSIM gap priorities retain the same relative priorities among MUSIM gaps as requested by the UE.

The requirements in TS 38.133 [6] clause 9.1.10 apply provided different priority levels are allocated to each periodic MUSIM gaps and different priority levels are allocated to each periodic MUSIM gap and each measurement gap configured via *GapConfig-r17* without *preConfigInd-r17* or *ncsgInd-r17*.

An aperiodic MUSIM gap, when configured, is unconditionally kept in case of collisions with any other gap occasions, including MUSIM gaps and measurement gaps.

[TS 38.133 [6], clause 9.1.10.3]

The UE can request use of “keep solution” via musim-GapKeepPreference in [13]. Keep solution is for handling collisions among different MUSIM gaps. If the use of “keep solution” is granted, the UE shall keep all colliding periodic and aperiodic MUSIM gaps irrespectively of the priority of the periodic MUSIM gaps.

[TS 38.133 [6], clause 9.1.10.4]

MUSIM gap occasions are considered colliding if at least one of the following conditions is met:

- the MUSIM gap occasions are fully overlapping in time domain, or
- the MUSIM gap occasions partially overlapping in time domain, or
- the distance between the two MUSIM gap occasions is equal to or smaller than 4ms.

The distance between two MUSIM gap occasions is defined as the time difference between the ending point of the first occasion and the starting point of the second occasion, where the first MUSIM gap occasion occurs earlier in time than the second MUSIM gap occasion.

When “keep solution” in TS 38.133 [6] clause 9.1.10.3 is not used, a periodic MUSIM gap occasion colliding with an aperiodic MUSIM gap is dropped.

When “keep solution” in TS 38.133 [6], clause 9.1.10.3 is not used, collisions between periodic MUSIM gap occasions are resolved based on the assigned MUSIM gap priorities. Collisions are resolved sequentially in order of decreasing priority, starting with the gap that has the highest priority. For each collision, the occasion of the MUSIM gap with highest priority shall be kept and the occasion of the MUSIM gap with lower priority shall be dropped.

[TS 38.133 [6], clause 9.1.10.5]

MUSIM gap and measurement gap occasions are considered colliding if at least one of the following conditions is met:

- the MUSIM gap and measurement gap occasions are fully overlapping in time domain, or
- the MUSIM gap and measurement gap occasions are partially overlapping in time domain, or
- the distance between any of the MUSM gap and the measurement gap occasions is equal to or smaller than 4ms.

The distance between two gap occasions is defined as the time difference between the ending point of the first occasion and the starting point of the second occasion, where the first gap occasion occurs earlier in time than the second gap occasion. The gap occasion can be either a MUSIM gap occasion or a measurement gap occasion.

The measurement gap occasion colliding with an aperiodic MUSIM gap is dropped.

Collisions between MUSIM gaps and measurement gaps configured via *GapConfig-r17* with assigned priority but without *preConfigInd-r17* or *ncsgInd-r17* are handled based on their assigned priorities. Collisions are resolved sequentially in order of decreasing priority, starting with the gap that has the highest priority. For each collision, the occasion of the MUSIM gap or measurement gap with highest priority shall be kept and the occasion of the MUSIM gap or measurement gap with lower priority shall be dropped.

Collisions between MUSIM gaps and measurement gaps configured via GapConfig or configured via *GapConfig-r17* without assigned priority are handled based on MGRP of the colliding gaps. Collisions are resolved sequentially in order of decreasing MGRP, starting with the gap that has the longest MGRP. For each collision, the occasion of the MUSIM gap or measurement gap with longer MGRP shall be kept and the occasion of the MUSIM gap or measurement gap with shorter MGRP shall be dropped. If the colliding MUSIM gap and measurement gap have the same MGRP, the requirements in clause 9 shall not apply.

[TS 38.133 [6], clause 9.1.10.6]

A slot is interrupted by a MUSIM gap if it overlaps with any occasion of the configured MUSIM gap, except for a dropped MUSIM gap occasion.

6.6.1.1 NR SA FR1 event-triggered reporting without gap in non-DRX

6.6.1.1.1 Test purpose

To verify the UE's ability to make a correct reporting of an event within intra-frequency cell search without gap under non-DRX.

6.6.1.1.2 Test applicability

This test applies to all types of NR UE release 15 onwards.

6.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.1.1.

6.6.1.1.4 Test description

6.6.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.1.1.4.1-1.

Table 6.6.1.1.4.1-1: Supported test configurations for NR SA FR1 event-triggered reporting without gap in non-DRX

Test Case ID	Description
6.6.1.1-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.6.1.1-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.6.1.1-3	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 6.6.1.1.4.1-2.

Table 6.6.1.1.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting without gap in non-DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.1.4.1-1.	

Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The test parameters for PCell and neighbour cell are given in Table 6.6.1.1.4.1-3 below.

2. Message contents are defined in clause 6.6.1.1.4.3.

3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.1.1.4.1-3: General test parameters for SA intra-frequency event triggered reporting tests without gap for FR1 under non-DRX

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3 ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

6.6.1.1.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.1.1.4.1-3 and Table 6.6.1.1.5-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.1.1.5-1.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.1.1.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 802 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   Or
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.1.1.4.3-1: Common Exception messages SA intra frequency event triggered reporting tests without gap under non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.2 for configuration 6.6.1.1-1 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.1 and synchronous cells for configuration 6.6.1.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC.1 and synchronous cells for configuration 6.6.1.1-3 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 with Condition INTRA-FREQ Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM

6.6.1.1.5 Test requirement

Table 6.6.1.1.4.1-3 and Table 6.6.1.1.5-1 define the primary level settings including test tolerances for NR SA event triggered reporting test without gap under non-DRX.

Table 6.6.1.1.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting tests without gap under non-DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 KHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS KHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	Specified in Cell 1 columns	
	dBm/9.36 MHz	2	-64.60	-62.25		
	dBm/38.16 MHz	3	-58.50	-56.16		
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to NR Cell 2.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index}$ = (T_{PSS/SSS_sync_intra} + $T_{SSB_measurement_period_intra}$) ms

T_{PSS/SSS_sync_intr}= max [600 ms, ceil (5 × K_p) × SMTC period] × $CSSF_{intra}$ = 600 ms

$T_{SSB_measurement_period_intra}$= max [200 ms, ceil(5 × K_p) × SMTC period] × $CSSF_{intra}$ = 200 ms

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 802 ms in this test case (note: this gives a total of 800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.1.2 NR SA FR1 event-triggered reporting without gap in DRX

6.6.1.2.1 Test purpose

To verify the UE's ability to make a correct reporting of an event within intra-frequency cell search without gap under DRX.

6.6.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR1 and long DRX cycle. Test 1 can be skipped if test case 6.6.1.13 is executed.

6.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.1.2.

6.6.1.2.4 Test description

6.6.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.1.2.4.1-1.

Table 6.6.1.2.4.1-1: Supported test configurations for NR SA FR1 event-triggered reporting without gap in DRX

Test Case ID	Description
6.6.1.2-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.6.1.2-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.6.1.2-3	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.1.2.4.1-2.

Table 6.6.1.2.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting without gap in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.	

1. The test parameters for PCell and neighbour cell are given in Table 6.6.1.2.4.1-3 below.

2. Message contents are defined in clause 6.6.1.2.4.3.

3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.1.2.4.1-3: General test parameters for SA intra-frequency event triggered reporting tests without gap for FR1 under DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3	Cell 1		
Neighbour cell		1, 2, 3	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2		
SSB configuration		1	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.2 FR1		
SMTC configuration		1	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
A3-Offset	dB	1, 2, 3	-4.5		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used
DRX	ms	1, 2, 3	DRX.1	DRX.7	
Time offset between serving and neighbour cells		1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1
		2	3 us		Synchronous cells
		3	3 us		Synchronous cells
T1	s	1, 2, 3	5		
T2	s	1, 2, 3	5	10	

6.6.1.2.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.1.2.4.1-3 and Table 6.6.1.2.5-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.1.2.5-1.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.1.2.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 922 ms for Test 1 or less than 6402 ms for Test 2 then the number of

successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 6.6.1.2.4.1-1 as appropriate.

6.6.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.1.2.4.3-1: Common Exception messages for SA intra frequency event triggered reporting tests without gap under DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ Table H.3.1-3 with Condition INTRA-FREQ MO SSB.1 FR1, SMTC.2 for configuration 6.6.1.2-1 Table H.3.1-3 with Condition INTRA-FREQ MO SSB.1 FR1, SMTC.1 and synchronous cells for configuration 6.6.1.2-2 Table H.3.1-3 with Condition INTRA-FREQ MO SSB.2 FR1, SMTC .1 and synchronous cells for configuration 6.6.1.2-3 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM Table H.3.7-1 with Condition DRX.1 and Offset for test 1 Table H.3.7-1 with Condition DRX.7 and Offset for test 2

6.6.1.2.5 Test requirement

Table 6.6.1.2.4.1-3 and Table 6.6.1.2.5-1 define the primary level settings including test tolerances for NR event triggered reporting in synchronous cells when DRX is used test.

Table 6.6.1.2.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting tests without gap under DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 KHz	1	-98			
		2				
		3				
$\hat{E}_s / I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS KHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	Specified in Cell 1 columns	
	dBm/9.36 MHz	2	-64.60	-62.25		
	dBm/38.16 MHz	3	-58.50	-56.16		
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

In Test 1 when DRX cycle length = 40 ms, the overall delay measured is defined as the time from the beginning of time period T2 to the moment the UE send one Event A3 triggered measurement report on PUSCH.

In Test 2 when DRX cycle length = 640 ms, the overall delay measured is defined as the time from the beginning of time period T2 to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report to NR Cell 2 on PUSCH.

For both tests:

The overall delays measured is defined as the time from the beginning of time period T2 to the moment the UE send one Event A3 triggered measurement report to NR Cell 2.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delay measured when DRX cycle length is 40 ms test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})$ ms

$T_{PSS/SSS_sync_intra} = \max[600ms, ceil(1.5 \times 5 \times K_p) \times \max(SMTC\ period, DRX\ cycle)] \times CSSF_{intra} = 600ms$

$T_{SSB_measurement_period_intra} = \max[200ms, ceil(1.5 \times 5 \times K_p) \times \max(SMTC\ period, DRX\ cycle)] \times CSSF_{intra} = 320ms$

TTI insertion uncertainty = 2 ms

The overall delay measured when DRX cycle length is 40 ms shall be less than a total of 922 ms.

The overall delay measured when DRX cycle length is 640 ms test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})$ ms

$T_{PSS/SSS_sync_intra} = ceil(5 \times K_p) \times DRX\ cycle \times CSSF_{intra} = 3200ms$

$T_{SSB_measurement_period_intra} = ceil(5 \times K_p) \times DRX\ cycle \times CSSF_{intra} = 3200ms$

TTI insertion uncertainty = 2 ms

The overall delay measured when DRX cycle length is 640 ms shall be less than a total of 6402 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.1.3 NR SA FR1 event-triggered reporting with gap in non-DRX

6.6.1.3.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting of an event with gaps under non-DRX within intra-frequency cell search with gaps requirements.

6.6.1.3.2 Test applicability

This test applies to all types of NR UE release 15 onwards supporting 5GS NR SA FR1, CSI-RS-based RLM and BWP operation without bandwidth restriction.

6.6.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.1.3.

6.6.1.3.4 Test description

6.6.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.1.3.4.1-1.

Table 6.6.1.3.4.1-1: Supported test configurations for NR SA FR1 event-triggered reporting with gap in non-DRX

Test Case ID	Description
6.6.1.3-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.6.1.3-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.6.1.3-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.6.1.3.4.1-2.

Table 6.6.1.3.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting with gap in non-DRX

Parameter	Value		Comment
Test environment	**NC**		**As specified in TS 38.508-1 [14] clause 4.1.**
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.1.3.4.1-3.
2. Message contents are defined in clause 6.6.1.3.4.3.
3. There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.1.3.4.1-3: General test parameters for NR SA FR1 event-triggered reporting with gap in non-DRX

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2, 3	40	
Measurement gap length	ms	1, 2, 3	6	
Measurement gap offset	ms	1, 2, 3	39	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	

		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX	ms	1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

6.6.1.3.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.1.3.4.1-3 and Table 6.6.1.3.5-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.1.3.5-1.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.1.3.5-1.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 802 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),

OR
- if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.1.3.4.3-1: Common Exception messages for NR SA FR1 event-triggered reporting with gap in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.2 for Configuration 6.6.1.3-1 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.1 and Synchronous cells for Configuration 6.6.1.3-2 Table H.3.1-3 with ConditionINTRA-FREQ MO, SSB.2 FR1, SMTC.1 and Synchronous cells for Configuration 6.6.1.3-3 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 with Condition INTRA-FREQ Table H.3.1-6 with Condition Pattern #0 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM

Table 6.6.1.3.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 configuration	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

Condition	Explanation
BWP-Id1	Active BWP (BWP2)

6.6.1.3.5 Test requirement

Table 6.6.1.3.4.1-3 and Table 6.6.1.3.5-1 define the primary level settings including test tolerances for NR SA FR1 event-triggered reporting with gap in non-DRX test.

Table 6.6.1.3.5-1: NR Cell specific test parameters for NR SA FR1 event-triggered reporting with gap in non-DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		CCR.1.1 FDD	
		2	CCR.1.2 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 KHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS KHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	Specified in Cell 1 columns	
	dBm/9.36 MHz	2	-64.60	-62.25		
	dBm/38.16 MHz	3	-58.50	-56.16		
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}$

T_{PSS/SSS_sync_intra} = 600 ms

$T_{SSB_measurement_period_intra}$ = 200 ms

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 802 ms in this test case (note: this gives a total of 800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.1.4 NR SA FR1 event-triggered reporting with gap in DRX

6.6.1.4.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting of an event with gaps under DRX within intra-frequency cell search with gaps requirements.

6.6.1.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR1, CSI-RS-based RLM, BWP operation without bandwidth restriction and long DRX cycle.

6.6.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.1.4.

6.6.1.4.4 Test description

6.6.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.1.4.4.1-1.

Table 6.6.1.4.4.1-1: Supported test configurations for NR SA FR1 event-triggered reporting with gap in DRX

Test Case ID	Description
6.6.1.4-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.6.1.4-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.6.1.4-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.6.1.4.4.1-2.

Table 6.6.1.4.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting with gap in DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.	

Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.1.4.4.1-3.

2. Message contents are defined in clause 6.6.1.4.4.3.

3. There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.1.4.4.1-3: General test parameters for NR SA FR1 event-triggered reporting with gap in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3	Cell 1		
Neighbour cell		1, 2, 3	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2		
Measurement gap type		1, 2, 3	Per-UE gaps		
Measurement gap repetition periodicity	ms	1, 2, 3	40		
Measurement gap length	ms	1, 2, 3	6		
Measurement gap offset	ms	1, 2, 3	39		
SSB configuration		1	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.2 FR1		
SMTC configuration		1	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0		
		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3	-4.5		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used
DRX	ms	1, 2, 3	DRX.1	DRX.7	
Time offset between serving and neighbour cells		1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs		Synchronous cells
		3	3 μs		Synchronous cells
T1	s	1, 2, 3	5		
T2	s	1, 2, 3	5	10	

6.6.1.4.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.1.4.4.1-3 and Table 6.6.1.4.4.2-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is

used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In Test 1 when DRX cycle = 40 ms is used, UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Timer Alignment Timer to keep the UE uplink time alignment. Furthermore, the UE is allocated with PUSCH resource at every DRX cycle. In Test 2 when DRX = 640 ms is used, the uplink time alignment is not maintained and the UE needs to use RACH to obtain uplink allocation for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.1.4.5-1.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.1.4.5-1.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 922 ms for Test 1 or less than 6402 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 6.6.1.4.4.1-3 as appropriate.

6.6.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.1.4.4.3-1: Common Exception messages for NR SA FR1 event-triggered reporting with gap in DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.2 for configuration 6.6.1.4-1 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.1 and synchronous cells for configuration 6.6.1.4-2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC.1 and synchronous cells for configuration 6.6.1.4-3 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 with Condition INTRA-FREQ Table H.3.1-6 with Condition Pattern #0 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.7-1 with Condition DRX.1 and Gap for test 1 Table H.3.7-1 with Condition DRX.7 and Gap for test 2 Table H.3.1-8 with Condition CSI-RS RLM

Table 6.6.1.4.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 configuration	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

Condition	Explanation
BWP-Id1	Active BWP (BWP2)

6.6.1.4.5 Test requirement

Table 6.6.1.4.4.1-3 and Table 6.6.1.4.5-1 define the primary level settings including test tolerances for NR SA FR1 event-triggered reporting with gap in DRX test.

Table 6.6.1.4.5-1: NR Cell specific test parameters for NR SA FR1 event-triggered reporting with gap in DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	

		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		CCR.1.1 FDD	
		2	CCR.1.2 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 KHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS KHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	Specified in Cell 1 columns	
	dBm/9.36 MHz	2	-64.60	-62.25		
	dBm/38.16 MHz	3	-58.50	-56.16		
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

In Test 1 when DRX cycle length = 40 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report on PUSCH.

In Test 2 when DRX cycle length = 640 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report on PUSCH.

For both tests:

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.

NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event A3 measurement report.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}$

T_{PSS/SSS_sync_intra} = 600 ms for Test 1, and T_{PSS/SSS_sync_intra} =3200 ms for Test 2

$T_{SSB_measurement_period_intra}$ = 320 ms for Test 1, and $T_{SSB_measurement_period_intra}$ = 3200 ms for Test 2

TTI insertion uncertainty = 2 ms

For Test 1, the overall delays measured shall be less than a total of 922 ms (note: this gives a total of 920 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For Test 2, the overall delays measured shall be less than a total of 6402 ms (note: this gives a total of 6400 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.1.5 NR SA FR1 event-triggered reporting without gap in non-DRX with SSB index reading

6.6.1.5.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting of an event within intra-frequency cell search without gaps requirements.

6.6.1.5.2 Test applicability

This test applies to all types of NR UE release 15 onwards.

6.6.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.1.5.

6.6.1.5.4 Test description

6.6.1.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.1.5.4.1-1.

Table 6.6.1.5.4.1-1: Supported test configurations for NR SA FR1 event-triggered reporting without gap in non-DRX with SSB index reading

Configuration	Description
6.6.1.5-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.1.5.4.1-2.

Table 6.6.1.5.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting without gap in non-DRX with SSB index reading

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.	

Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.1.5.4.1-3.

2. Message contents are defined in clause 6.6.1.5.4.3.

3. There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.1.5.4.1-3: General test parameters for NR SA FR1 event-triggered reporting without gap in non-DRX with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
SMTC configuration		1	SMTC.2	
A3-Offset	dB	1	-4.5	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1	5	
T2	s	1	5	

6.6.1.5.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.1.5.4.1-3 and Table 6.6.1.5.5-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.1.5.5-1.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.1.5.5-1.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 922 ms then the number of successful tests is increased by one. If the

UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 clause 4.6 with the following exceptions:

Table 6.6.1.5.4.3-1: Common Exception messages for NR SA FR1 event-triggered reporting without gap in non-DRX with SSB index reading

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.2 for Configuration 6.6.1.5-1 Table H.3.1-4 with SSB Index and A3-offset = -4.5 dB Table H.3.1-5 with Condition INTRA-FREQ Table H.3.1-7 with Condition INTRA-FREQ and SSB Index Table H.3.1-8 with Condition SSB RLM

6.6.1.5.5 Test requirement

Table 6.6.1.5.4.1-3 and Table 6.6.1.5.5-1 define the primary level settings including test tolerances for SA event triggered reporting without gap under non-DRX with SSB index reading test.

Table 6.6.1.5.5-1: NR Cell specific test parameters for NR SA FR1 event-triggered reporting without gap in non-DRX with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	

OCNG Patterns		1	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
N_{oc} Note 2	dBm/15 KHz	1	-98			
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS KHz	1	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1	-64.60	-62.25	Specified in Cell 1 columns	
Propagation Condition		1	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_with_index}$

$T_{identify_intra_with_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}$

T_{PSS/SSS_sync_intra} = 600 ms

$T_{SSB_time_index_intra}$ = 120 ms

$T_{SSB_measurement_period_intra}$ = 200 ms

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 922 ms in this test case (note: this gives a total of 920 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.1.6 NR SA FR1 event-triggered reporting with gap in non-DRX with SSB index reading

6.6.1.6.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting of an event within intra-frequency cell search with gaps requirements.

6.6.1.6.2 Test applicability

This test applies to all types of NR UE release 15 onwards supporting 5GS NR SA FR1, CSI-RS-based RLM and BWP operation without bandwidth restriction.

6.6.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.1.6.

6.6.1.6.4 Test description

6.6.1.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.1.6.4.1-1.

Table 6.6.1.6.4.1-1: Supported test configurations for NR SA FR1 event-triggered reporting with gap in non-DRX with SSB index reading

Configuration	Description
6.6.1.6-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.1.3.4.1-2.

Table 6.6.1.6.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting with gap in non-DRX with SSB index reading

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.1.6.4.1-3.
2. Message contents are defined in clause 6.6.1.6.4.3.
3. There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.1.6.4.1-3: General test parameters for NR SA FR1 event-triggered reporting with gap in non-DRX with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	
Measurement gap type		1	Per-UE gaps	
Measurement gap repetition periodicity	ms	1	40	
Measurement gap length	ms	1	6	
Measurement gap offset	ms	1	39	
SSB configuration		1	SSB.1 FR1	

SMTC configuration		1	SMTC.2	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
A3-Offset	dB	1	-4.5	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1	5	
T2	s	1	5	

6.6.1.6.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.1.6.4.1-3 and Table 6.6.1.6.5-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.1.6.5-1.

3. SS shall transmit an RRCReconfiguration message.

4. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.1.3.5-1.

6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 922 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED

with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 clause 4.6 with the following exceptions:

Table 6.6.1.6.4.3-1: Common Exception messages for NR SA FR1 event-triggered reporting with gap in non-DRX with SSB index reading

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.2 for Configuration 6.6.1.6-1 Table H.3.1-4 with SSB index and A3-offset = -4.5dB. Table H.3.1-5 with Condition INTRA-FREQ Table H.3.1-6 with Condition Pattern #0 Table H.3.1-7 with Condition INTRA-FREQ and SSB index Table H.3.1-8 with Condition CSI-RS RLM

Table 6.6.1.6.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 configuration	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

Condition	Explanation
BWP-Id1	Active BWP (BWP2)

6.6.1.6.5 Test requirement

Table 6.6.1.6.4.1-3 and Table 6.6.1.6.5-1 define the primary level settings including test tolerances for SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading test.

Table 6.6.1.6.5-1: NR Cell specific test parameters for NR SA FR1 event-triggered reporting with gap in non-DRX with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2

TDD configuration		1	N/A		N/A	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		CCR.1.1 FDD	
OCNG Patterns		1	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
N_{oc} Note 2	dBm/15 KHz	1	-98			
$\hat{E}_s / I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS KHz	1	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1	-64.60	-62.25	Specified in Cell 1 columns	
Propagation Condition		1	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report.

The overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_with_index}$

$T_{identify_intra_with_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}$

T_{PSS/SSS_sync_intra} = 600 ms

$T_{SSB_time_index_intra}$ = 120 ms

$T_{SSB_measurement_period_intra}$ = 200 ms

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 922 ms in this test case (note: this gives a total of 920 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.1.7 NR SA FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16

6.6.1.7.1 Test purpose

To verify the UE's ability to make a correct reporting of an event within intra-frequency cell search without gap under DRX for UE configured with highSpeedMeasFlag-r16.

6.6.1.7.2 Test applicability

This test applies to all types of NR UE release 15 onwards that supports measurement enhancements in high speed scenario.

6.6.1.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.1.7.

6.6.1.7.4 Test description

6.6.1.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.1.7.4.1-1.

Table 6.6.1.7.4.1-1: Supported test configurations for NR SA FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16

Configuration	Description
6.6.1.7-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.1.7-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.1.7-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.1.7.4.1-2.

Table 6.6.1.7.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The test parameters for PCell and neighbour cell are given in Table 6.6.1.7.4.1-3 below.

2. Message contents are defined in clause 6.6.1.7.4.3.

3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.1.7.4.1-3: General test parameters for SA intra-frequency event triggered reporting tests without gap for FR1 under DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Value	Comment
highSpeedMeasFlag-r16		1,2,3	Present	To enable high speed measurement enhancements
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3	DRX.7	640ms DRX cycle
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	6	

6.6.1.7.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.1.7.4.1-3 and Table 6.6.1.7.5-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.1.7.5-1.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.1.7.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 5122 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set NR Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.1.7.4.3-1: Common Exception messages for SA intra frequency event triggered reporting tests without gap under DRX for UE configured with highSpeedMeasFlag-r16

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-3 with Condition HighSpeedMeas
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM Table H.3.7-1 with Condition DRX.7 and Offset
Specific message contents exceptions for Test Configuration 6.6.1.7-1	Table H.3.1-3 with Condition INTRA-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2 Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.1 FR1
Specific message contents exceptions for Test Configuration 6.6.1.7-2	Table H.3.1-3 with Condition INTRA-FREQ MO and synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1 Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.1 FR1
Specific message contents exceptions for Test Configuration 6.6.1.7-3	Table H.3.1-3 with Condition INTRA-FREQ MO and synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1 Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.2 FR1

6.6.1.7.5 Test requirement

Table 6.6.1.7.4.1-3 and Table 6.6.1.7.5-1 define the primary level settings including test tolerances for NR event triggered reporting in synchronous cells when DRX is used

Table 6.6.1.7.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting tests without gap under DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	

RMSI CORESET RMC configuration		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94+TT	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25T	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2	AWGN		AWGN 1944Hz Note 4	
		3	AWGN		AWGN 3334Hz Note 5	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The AWGN 1944 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 1944Hz.

Note 5: The AWGN 3334 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

The overall delays measured is defined as the time from the beginning of time period T2 to the moment the UE send one Event A3 triggered measurement report to NR Cell 2. When DRX cycle length = 640 ms, the overall delay measured is defined as the time from the beginning of time period T2 to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report to NR Cell 2 on PUSCH.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delay measured when DRX cycle length is 640 ms test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})$ ms

T_{PSS/SSS_sync_intra} = ceil(5 × K_p) × DRX cycle × $CSSF_{intra}$ = 3200ms

$T_{SSB_measurement_period_intra}$ = ceil(Y × K_p) × DRX cycle × $CSSF_{intra}$ = 1920ms

TTI insertion uncertainty = 2 ms

The overall delay measured when DRX cycle length is 640 ms shall be less than a total of 5122 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.1.8 NR SA FR1 event triggered reporting without gap in DRX for UE configured with highSpeedMeasCA-Scell-r17

6.6.1.8.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event for UE configured with highSpeedMeasCA-Scell-r17. This test will partly verify the intra-frequency cell search requirements in TS 38.133 [6] clauses 9.2.5.1 and 9.2.5.2.

6.6.1.8.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward supporting enhanced NR CA measurement requirements in high-speed scenario.

6.6.1.8.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.6.1.0.1

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.1.8.

6.6.1.8.4 Test description

6.6.1.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.1.8.4.1-1.

Table 6.6.1.8.4.1-1: Supported PCell test configurations for NR SA FR1 event triggered reporting without gap in DRX for UE configured with highSpeedMeasCA-Scell-r17

Configuration	Description
6.6.1.8-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.1.8-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.1.8-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BWchannel) defined in each test configuration.	

Table 6.6.1.8.4.1-1A: Supported SCell test configurations for NR SA FR1 event triggered reporting without gap in DRX for UE configured with highSpeedMeasCA-Scell-r17

$Configuration_{SCell}$	Description
6.6.1.8-1A	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.1.8-2A	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.1.8-3A	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BWchannel) defined in each test configuration. Note 3: NR Cell 3 has the same SCS, BW and duplex mode as NR Cell 2.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.1.8.4.1-2.

Table 6.6.1.8.4.1-2: Initial conditions for NR SA FR1 event triggered reporting without gap in DRX for UE configured with highSpeedMeasCA-Scell-r17

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.1.8.4.1-3.

2. Message contents are defined in clause 6.6.1.8.4.3.

3. There is two carriers and three cells specified in the test. NR Cell 1 is the PCell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test. NR Cell 2 is is a FR1 deactivated SCell and NR Cell 3 is a neighbour cell on the same frequency as the SCell.

Table 6.6.1.8.4.1-3: General test parameters for NR SA FR1 event triggered reporting without gap in DRX for UE configured with highSpeedMeasCA-Scell-r17

Parameter	Unit	Test configuration	Value	Comment
highSpeedMeasCA-Scell-r17		1,2,3	Present	To enable high speed measurement enhancements
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A6-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3	DRX.6	
measCycleSCell		1, 2, 3	640ms	
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	

6.6.1.8.4.2 Test procedure

Same test procedure as in 6.6.1.7.4.2 except following step 6:

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 5762 ms then the number of successful tests is increased by one. If the

UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

6.6.1.8.4.3 Message contents

Table 6.6.1.8.4.3-1: Common Exception messages for NR SA FR1 event triggered reporting without gap in DRX for UE configured with highSpeedMeasCA-Scell-r17

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM Table H.3.7-1 with Condition DRX.6
Specific message contents exceptions for Test Configuration 6.6.1.8-1	Table H.3.1-3 with Condition INTRA-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2 Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.1 FR1
Specific message contents exceptions for Test Configuration 6.6.1.8-2	Table H.3.1-3 with Condition INTRA-FREQ MO and synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1 Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.1 FR1
Specific message contents exceptions for Test Configuration 6.6.1.8-3	Table H.3.1-3 with Condition INTRA-FREQ MO and synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1 Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.2 FR1

Table 6.6.1.8.4.3-2: *ReportConfigNR-DEFAULT* (a6-offset): NR report configuration for event A6

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition EVENT_A6			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA6 SEQUENCE {			
a6-Offset CHOICE {			
rsrp	-9	The actual value is field value * 0.5 dB.	
}			
hysteresis	0		
timeToTrigger	ms0		
}			
}			
}			
}			
}			

Table 6.6.1.8.4.3-3: *ServingCellConfigCommon*

Derivation Path: TS 38.508-1[14], Table 4.6.3-168 with condition R17 HST FR1			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
HighSpeedConfig-v1700 SEQUENCE {			
highSpeedMeasCA-Scell-r17	true		
}			
}			

Table 6.6.1.8.4.3-4: *MeasObjectNR-DEFAULT*: measCycleSCell configuration for SCell intra-frequency measurements

Derivation Path: TS 38.508-1 [14], Table 4.6.3-76

Information Element	Value/remark	Comment	Condition
MeasObjectNR::= SEQUENCE {			
measCycleSCell-v1530	sf640		
}			

6.6.1.8.5 Test requirement

Table 6.6.1.8.5-1 defines the primary level settings including test tolerances for EN-DC FR1 interruptions at SRS carrier based switching in asynchronous EN-DC.

Table 6.6.1.8.5-1: NR cell specific test parameters for NR SA FR1 event triggered reporting without gap in DRX for UE configured with highSpeedMeasCA-Scell-r17

Parameter	Unit	Test configuration	Cell 1	Cell 2	Cell 3
TDD configuration		1	N/A	N/A	N/A
		2	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
		3	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1	SR.1.1 FDD	N/A	N/A
		2	SR.1.1 TDD		
		3	SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD	N/A	N/A
		2	CR.1.1 TDD	N/A	N/A
		3	CR.2.1 TDD	N/A	N/A
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	N/A	N/A
		2	CCR.1.1 TDD	N/A	N/A
		3	CCR.2.1 TDD	N/A	N/A
OCNG Patterns		1, 2, 3	OP.1	OP.1	OP.1
TRS configuration		1	TRS.1.1 FDD	N/A	N/A
		2	TRS.1.1 TDD	N/A	N/A
		3	TRS.1.2 TDD	N/A	N/A
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
RLM-RS		1, 2, 3	SSB	SSB	SSB
N_{oc} Note 2	dBm/SCS	1	-98		
		2	-98		
		3	-95		
N_{oc} Note 2	dBm/15 kHz	1	-98		
		2			
		3			
$\hat{E}_s/I_{ot}$	dB	1	4	4	4	-1.46	-Infinity	-1.46
		2						
		3						
$\hat{E}_s/N_{oc}$	dB	1	4	4	4	4	-Infinity	4
		2						
		3						
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-94	-94	-Infinity	-94
		2	-94	-94	-94	-94	-Infinity	-94
		3	-91	-91	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-64.60	-64.60	-62.25	-64.60	-62.25

	dBm/9.36 MHz	2	-64.60	-64.60	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-58.50	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1,2	AWGN				AWGN 1944Hz Note 4	
		3	AWGN				AWGN 3334Hz Note 5	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.
Note 5: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

The UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 5760 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.1.9 NR SA FR1 event triggered reporting with MUSIM gap configured

Editor's Note: This test case is incomplete in following aspects:

TT analysis is still missing.

6.6.1.9.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event on an intra-frequency layer based on measurement performed without measurement gaps when the UE is also configured with MUSIM gaps. This test will partly verify the intra-frequency cell search requirements in TS 38.133 [6] clauses 9.2.5.1 and 9.2.5.2.

6.6.1.9.2 Test applicability

This test applies to all types of NR UE release 18 and forward, supporting providing MUSIM assistance information with MUSIM gap preference and related MUSIM gap configuration.

6.6.1.9.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.6.1.0.1 and 6.6.1.0.6.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.1.9.

6.6.1.9.4 Test description

6.6.1.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.1.9.4.1-1.

Table 6.6.1.9.4.1-1: Supported test configurations for NR SA FR1 event-triggered reporting with MUSIM gap configured

Configuration	Description
6.6.1.9-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.1.9-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.1.9-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.1.9.4.1-2.

Table 6.6.1.9.4.1-2: Initial conditions for NR SA FR1 event triggered reporting with MUSIM gap configured

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.9.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.1.9.4.1-3.

2. Message contents are defined in clause 6.6.1.9.4.3.

3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.1.9.4.1-3: General test parameters for SA intra-frequency event triggered reporting with MUSIM gap configured

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
MUSIM gap Pattern ID		1,2,3	0	
MUSIM gap offset	ms	1,2,3	0	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

6.6.1.9.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.1.9.4.1-3 and Table 6.6.1.9.5-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.1.9.5-1.

3. SS shall transmit an *RRCReconfiguration* message with *measConfig* and *musim-GapConfig-r17*.

4. The UE shall transmit an *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.1.9.5-1. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 802 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

- transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

OR

- switch the UE off.

8. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   Or
   - if the device has been switched off, switch on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.1.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:Table 6.6.1.9.4.3-1: Common Exception messages SA intra frequency event triggered reporting with MUSIM gap configured

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM
Specific message contents exceptions for Test Configuration 6.6.1.9-1	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.2
Specific message contents exceptions for Test Configuration 6.6.1.9-2	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.1
Specific message contents exceptions for Test Configuration 6.6.1.9-3	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC.1

Table 6.6.1.9.4.3-2: RRCReconfiguration: NR measurement Configuration (Step 3, Test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig-DEFAULT specified in Table H.3.1-2 with Condition INTRA-FREQ	Measurement configuration	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
musim-GapConfig-r17 CHOICE {			
setup	MUSIM-GapConfig	MUSIM gap configuration Table 6.6.9.1.4.3-3	
}			
}			
}			
}			
}			
}			
}			
}			
}			

Table 6.6.1.9.4.3-3: MUSIMGapConfig (Table 6.6.1.9.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-82BA			
Information Element	**Value/remark**	**Comment**	**Condition**
MUSIM-GapConfig-r17 ::= SEQUENCE {			
musim-GapToReleaseList-r17	not present		
musim-GapToAddModList-r17 SEQUENCE (SIZE (1..3)) OF MUSIM-Gap-r17 {	1 entry		
MUSIM-Gap-r17 SEQUENCE {		Entry 1	
musim-GapId-r17	0		
musim-GapInfo-r17 SEQUENCE {			
musim-Starting-SFN-AndSubframe-r17	not present		
musim-GapLength-r17	ms6	Pattern #0	
musim-GapRepetitionAndOffset-r17 CHOICE {		Pattern #0	
ms40	0		
}			
}			
}			
}			
musim-AperiodicGap-r17	not present		
}			

6.6.1.9.5 Test requirement

Table 6.6.1.9.4.1-3 and Table 6.6.1.9.5-1 define the primary level settings including test tolerances for NR SA event triggered reporting test with MUSIM gap configured.

Table 6.6.1.9.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting with MUSIM gap configured

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	

PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 KHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS KHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	Specified in Cell 1 columns	
	dBm/9.36 MHz	2	-64.60	-62.25		
	dBm/38.16 MHz	3	-58.50	-56.16		
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})ms$

T_{PSS/SSS_sync_intra}= max [600 ms, ceil ($5 \times K_p$) × SMTC period] × $CSSF_{intra}$= 600 ms

$T_{SSB_measurement_period_intra}$ = max [200 ms, ceil(5 × K_p) × SMTC period] × $CSSF_{intra}$ = 200 ms

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 802 ms in this test case (note: this gives a total of 800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.1.10 to 6.6.1.12

6.6.1.12 NR SA FR1 event triggered reporting with SSB index detection without measurement gap in non-DRX mode for UE operating with 12 PRB SSB bandwidth

Editor's Note: This test case is incomplete in following aspects:

- Some parameters are in brackets.
- TT analysis is missing.
- Test applicability is missing.

6.6.1.12.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting of an event when the intra-frequency target cell is transmitting 12 PRB SSB. This test will partly verify the FDD intra-frequency cell search requirements in TS 38.133 [6] clauses 9.2.5.1 and 9.2.5.2.

6.6.1.12.2 Test applicability

This test applies to all types of NR UE Release 18 supporting less than 5 MHz bandwidth.

6.6.1.12.3 Minimum conformance requirements

The minimum conformance requirements are specified in TS 38.133 [6] clauses 9.2.5.1 and 9.2.5.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.1.12.

6.6.1.12.4 Test description

6.6.1.12.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.1.12.4.1-1.

Table 6.6.1.12.4.1-1: Supported test configurations for NR SA FR1 event-triggered reporting with SSB index reading for 12 PRB bandwidth

Configuration	Description
6.6.1.12-1	15 kHz SSB SCS, 3 MHz bandwidth, FDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 6.6.1.12.4.1-2.

Table 6.6.1.12.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting with SSB index reading for 12 PRB bandwidth

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.	
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.12.4.1-1.	
Propagation conditions	AWGN	As specified in Annex C.2.2.

Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.1.5.4.1-3 with test configuration 1, except those specified in Table 6.6.1.12.4.1-3.

2. Message contents are defined in clause 6.6.1.12.4.3.

3. There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex [C.1.2] and C.1.3 for this test.

Table 6.6.1.12.4.1-3: General test parameters for NR SA FR1 event-triggered reporting with SSB index reading for 12 PRB bandwidth

Parameter	Unit	Test configuration	Value	Comment
SSB configuration		1	[SSB.13 FR1]	

6.6.1.12.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.1.5.4.1-3 config 1 with the exceptions specified in Table 6.6.1.12.4.1-3 and Table 6.6.1.5.5-1 config 1 with the exceptions specified in Table 6.6.1.12.5-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively.

During time duration T1, the UE shall not have any timing information of Cell 2.

The test steps are same as 6.6.1.5.4.2 except these steps:

2. Set the parameters according to T1 in Table 6.6.1.5.5-1 with the exceptions specified in Table 6.6.1.12.5-1.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.1.5.5-1 with the exceptions specified in Table 6.6.1.12.5-1.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 942 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

6.6.1.12.4.3 Message contents

Message contents are according to TS 38.508-1 clause 4.6 with the following exceptions:

Table 6.6.1.12.4.3-1: Common Exception messages for NR SA FR1 event-triggered reporting with SSB index reading for 12 PRB bandwidth

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ Table H.3.1-3 with Condition INTRA-FREQ MO, [SSB.13 FR1], SMTC.2 Table H.3.1-4 with SSB Index and A3-offset = -4.5 dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ and SSB Index Table H.3.1-8 with Condition SSB RLM

6.6.1.12.5 Test requirement

Table 6.6.1.5.4.1-3 config 1 with the exceptions specified in Table 6.6.1.12.4.1-3 and Table 6.6.1.5.5-1 config 1 with the exceptions specified in Table 6.6.1.12.5-1 define the primary level settings.

Table 6.6.1.12.5-1: NR Cell specific test parameters for NR SA FR1 event-triggered reporting with SSB index reading for 12 PRB bandwidth

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
$BW_{channel}$	MHz	1	3: $N_{RB,c}$ = 15		3: $N_{RB,c}$ = 15	
PDSCH RMC configuration		1	[SR.1.2 FDD]		N/A	
RMSI CORESET RMC configuration		1	[CR.1.3 FDD]		N/A	
Dedicated CORESET RMC configuration		1	[CCR.1.7 FDD]		N/A	
Io	dBm/2.7 MHz	1	-70.00+TT	-67.65+TT	-70.00+TT	-67.65+TT

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_with_index}$

$T_{identify_intra_with_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra_less_than_5MHz}$

T_{PSS/SSS_sync_intra} = 600 ms

$T_{SSB_time_index_intra_less_than_5MHz}$ = 140 ms

$T_{SSB_measurement_period_intra}$ = 200 ms

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 942 ms in this test case (note: this gives a total of 940 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.1.13 NR SA FR1 event-triggered reporting tests without gap under Cell DTX

6.6.1.13.1 Test purpose

To verify the UE's ability to make correct reporting of an event within intra-frequency cell search without gap under Cell DTX configuration.

6.6.1.13.2 Test applicability

This test applies to all types of NR UE release 18 and forward and support Cell DTX operation.

6.6.1.13.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.1.13.

6.6.1.13.4 Test description

6.6.1.13.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.1.13.4.1-1.

Table 6.6.1.13.4.1-1: Supported test configurations for NR SA FR1 event-triggered reporting without gap with Cell DTX

Test Case ID	Description
6.6.1.13-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.6.1.13-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.6.1.13-3	30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE fulfils the requirements in this Cell DTX test case can skip the test case in 6.6.1.2 DRX.1 configuration.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.1.13.4.1-2.

Table 6.6.1.13.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting without gap with Cell DTX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.13.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The test parameters for PCell and neighbour cell are given in Table 6.6.1.13.4.1-3 below.
2. Message contents are defined in clause 6.6.1.13.4.3.
3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.1.13.4.1-3: General test parameters for SA intra-frequency event triggered reporting without gap for FR1 with Cell DTX

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	

Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3	DRX.1	
Cell DTX		1,2,3	DTX.1	
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

6.6.1.13.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.1.13.4.1-3 and Table 6.6.1.13.5-1, respectively. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2. During time duration T2, NW triggers the Cell DTX.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.1.13.5-1.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.1.13.5-1. T2 starts.

6. SS transmit an *RRCReconfiguration* message to configure and activate Cell DTX. The UE shall transmit *RRCReconfigurationComplete* message.

7. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1082 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

8. After the SS receive the *MeasurementReport* message in step 7) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

9. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

10. Depending on the choice in Step 8, the SS:
    - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.1.13.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.1.13.4.3-1: Common Exception messages for SA intra frequency event triggered reporting tests without gap with Cell DTX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.2 for configuration 6.6.1.13-1 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.1 and synchronous cells for configuration 6.6.1.13-2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC.1 and synchronous cells for configuration 6.6.1.13-3 Table H.3.1-4 with A3-offset = -4.5 Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM Table H.3.7-1 with Condition DRX.1 and Offset

Table 6.6.1.13.4.3-2: RRCReconfiguration (step 6)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	Not present		
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig		
}			
}			
}			
}			

Table 6.6.1.13.4.3-3: CellGroupConfig (Table 6.6.1.13.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
spCellConfigDedicated SEQUENCE {			
servingCellConfig SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
setup	PDCCH-Config		
}			
cellDTX-DRX-Config-r18 CHOICE {			
setup SEQUENCE {			
cellDTX-DRX-onDurationTimer-r18 CHOICE {			
milliSeconds	ms1		

}			
cellDTX-DRX-CycleStartOffset-r18 CHOICE {			
ms160	0		
}			
cellDTX-DRX-SlotOffset-r18	0		
cellDTX-DRX-ConfigType-r18	dtx		
cellDTX-DRX-ActivationStatus-r18	activated		
}			
}			
positionInDCI-cellDTRX-r18	Not present		
}			
}			
}			
}			
}			

6.6.1.13.5 Test requirement

Table 6.6.1.13.4.1-3 and Table 6.6.1.13.5-1 define the primary level settings including test tolerances for NR event-triggered reporting without gap under Cell DTX.

Table 6.6.1.13.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting tests without gap with Cell DTX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				

$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 + 160 = 1080 ms from the beginning of time period T2, while 160ms is the Cell DTX cycle length, which is the delay uncertainty for next available PUSCH for L3 MR reporting during cell DTX. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.2 Inter-frequency measurements

6.6.2.0 Minimum conformance requirements for Inter-frequency measurements

6.6.2.0.1 Minimum conformance requirements for Inter-frequency measurement with measurement gaps

Same as clause 4.6.2.0 when measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps.

6.6.2.0.2 Minimum conformance requirements for Inter-frequency measurement without measurement gaps

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$. It is assumed that when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2, the following condition is met:

- SFN and frame boundary across serving cell and inter-frequency neighbour cells is aligned

$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter})$ ms

$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter})$ ms

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 6.6.2.0-1

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 6.6.2.0-2.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 6.6.2.0-3 and table 6.6.2.0-4.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when inter frequency SMTC is fully non overlapping or partially overlapping with measurement gaps or according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps, i.e. when inter frequency SMTC is fully overlapping with measurement gaps.

M_{pss/sss_sync_inter}: For a UE supporting FR2 power class 1, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2 power class 2, M_{pss/sss_sync_inter} = 24 samples. For a UE supporting FR2 power class 3, M_{pss/sss_sync_inter} = 24 samples. For a UE supporting FR2 power class 4, M_{pss/sss_sync} = 24 samples.

$M_{meas_period_inter}$: For a UE supporting FR2 power class 1, $M_{meas_period_inter}$ =40 samples. For a vehicle mounted UE supporting FR2 power class 2, $M_{meas_period_inter}$ =24 samples. For a UE supporting FR2 power class 3, $M_{meas_period_inter}$ =24 samples. For a UE supporting FR2 power class 4, $M_{meas_period_inter}$ = 24 samples.

When inter frequency SMTC is fully non overlapping with measurement gaps or inter frequency SMTC is fully overlapping with MGs, Kp=1.

When inter frequency SMTC is partially overlapping with measurement gaps, Kp = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP.

For FR2,

$K_{layer1_measurement}$=1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by *SSB-ToMeasure* and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

Table 6.6.2.0-1: Time period for PSS/SSS detection, (FR1)

DRX cycle	T_{PSS/SSS_sync_inter}
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified.	

Table 6.6.2.0-2: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_inter}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{inter}$

DRX cycle≤ 320ms	max(120ms, ceil (1.5 x 3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified.	

The UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in TS 38.133 [6] clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 6.6.2.0-3 and 6.6.2.0-4, if UE supports inter-frequency measurement without measurement gaps:

Table 6.6.2.0-3: Measurement period for inter-frequency measurements without gaps ((FR1)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)$^{Note\ 1}$ x $CSSF_{inter}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified.	

Table 6.6.2.0-4: Measurement period for inter-frequency measurements without gaps (FR2)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(400ms, ceil($M_{meas_period_inter}$ x K_p x $K_{layer1_measurement}$) x SMTC period)$^{Note\ 1}$ x $CSSF_{inter}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x $M_{meas_period_inter}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	ceil($M_{meas_period_inter}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified.	

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE is required to be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols to be measured in the following clauses are the SSB symbols indicated by SSB-ToMeasure [2], if it is configured; otherwise, all L SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

The scheduling availability requirements when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2 in TS 38.133 [6] clause 9.3.9.3.1~9.3.9.3.3 are valid under the following conditions:

- SFN and frame boundary across serving cell and inter-frequency neighbour cells is aligned, and

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

When TDD intra-band carrier aggregation is performed, the scheduling restrictions due to one serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

For UE which do not support *simultaneousRxDataSSB-DiffNumerology-Inter-r16* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If UE performs inter-frequency measurements without measurement gaps in a TDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

- If UE performs inter-frequency measurements without measurement gaps in a FDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

The normative reference for this requirement is TS 38.133 [6] clause 9.3.2, 9.3.4, 9.3.5, 9.3.6.3.

6.6.2.0.3 Minimum conformance requirements for event-triggered measurement with MUSIM gap with lower and higher priority

Same as clause 6.6.1.0.6.

6.6.2.0.4 Minimum conformance requirements for event triggered reporting using MUSIM gap with shorter MGRP

Same as clause 6.6.1.0.6.

6.6.2.1 NR SA FR1-FR1 event-triggered reporting in non-DRX

6.6.2.1.1 Test purpose

To verify that the UE makes correct reporting of an event in non-DRX within inter-frequency NR cell search requirements without SSB time index detection in TS 38.133 [6] clause 9.3.4.

6.6.2.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.2.1.

6.6.2.1.4 Test description

6.6.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.2.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.2.1.4.1-2. Test environment parameters are given in Table 6.6.2.1.4.1-3.

Table 6.6.2.1.4.1-1: SA FR1-FR1 event triggered reporting tests in non-DRX supported test configurations

Test Case ID	Description
6.6.2.1-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.6.2.1-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.6.2.1-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table 6.6.2.1.4.1-2: SA FR1-FR1 general test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection in non DRX

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	As specified in TS 38.133 clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

Table 6.6.2.1.4.1-3: Test Environment parameters for SA inter-frequency event triggered reporting without SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.1 for DUT part and A.3.1.8.4 for TE part.		

1. Message contents are defined in clause 6.6.2.1.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

6.6.2.1.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.2.1.4.1-2.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.2.1.4.1-2. T2 Starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 920 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.), OR:
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.2.1.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 and gap offset = 9Table H.3.1-7 with Condition INTER-FREQ
Specific message contents exceptions for Test Configuration 6.6.2.1-1	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 6.6.2.1-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 6.6.2.1-3	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

6.6.2.1.5 Test requirement

Table 6.6.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.2.1.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection in non-DRX

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		-	
			Config 2	SR.1.1 TDD			
			Config 3	SR 2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR 2.1 TDD			
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD		-	
			Config 2	CCR.1.1 TDD			

		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%. with a confidence level of 95%

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.2.2 NR SA FR1-FR1 event-triggered reporting in DRX

6.6.2.2.1 Test purpose

To verify that the UE makes correct reporting of an event in DRX within inter-frequency NR cell search requirements without SSB time index detection in TS 38.133 [6] clause 9.3.4.

6.6.2.2.2 Test applicability

This test applies to all types of NR UE Release 15 and forward supporting 5GS NR SA FR1 and long DRX cycle.

6.6.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.2.2.

6.6.2.2.4 Test description

6.6.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.2.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.2.2.4.1-2. Test environment parameters are given in Table 6.6.2.2.4.1-3.

Table 6.6.2.2.4.1-1: SA FR1-FR1 event triggered reporting tests in DRX supported test configurations

Test Case ID	Description
6.6.2.2-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.6.2.2-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.6.2.2-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table 6.6.2.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies are used
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0		As specified in TS 38.133 clause 9.1.2-1
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.7	As specified in clause A.5
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.1	11	

Table 6.6.2.2.4.1-3: Test Environment parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.1 for DUT part and A.3.1.8.4 for TE part.		

1. Message contents are defined in clause 6.6.2.2.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

6.6.2.2.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.2.2.4.1-2 and 6.6.2.2.5-1.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.2.2.5-1. T2 Starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1080 ms for Test 1 or 10240 ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.), OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 6.6.2.2.4.1-2 as appropriate.

6.6.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.2.2.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 and gap offset = 9 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 and Gap and INTER-FREQ for Test 1 Table H.3.7-1 with Condition DRX.7 and Gap and INTER-FREQ for Test 2
Specific message contents exceptions for Test Configuration 6.6.2.2-1	Table H.3.1-3 with Conditions INTER-FREQ MO and Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 6.6.2.2-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 6.6.2.2-3	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

6.6.2.2.5 Test requirement

Table 6.6.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.2.2.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1	FDD			
		Config 2,3	TDD			
TDD configuration		Config 1	Not Applicable			
		Config 2	TDDConf.1.1			
		Config 3	TDDConf.2.1			
$BW_{channel}$	MHz	Config 1,2	10: $N_{RB,c}$ = 52			
		Config 3	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,2	10: $N_{RB,c}$ = 52			

			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		-	
			Config 2	SR.1.1 TDD			
			Config 3	SR 2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR 2.1 TDD			
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD		-	
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1,2,3	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98	
			Config 3	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
		dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

In test 1 and 2, UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.2.3 Void

6.6.2.4 Void

6.6.2.5 NR SA FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection

6.6.2.5.1 Test purpose

To verify that the UE makes correct reporting of an event in non-DRX within inter-frequency NR cell search requirements with SSB time index detection in TS 38.133 [6] clause 9.3.4.

6.6.2.5.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.6.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.2.5.

6.6.2.5.4 Test description

6.6.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.2.5.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.2.5.4.1-2. Test environment parameters are given in Table 6.6.2.5.4.1-3.

Table 6.6.2.5.4.1-1: SA FR1-FR1 event triggered reporting tests in non-DRX with SSB time index detection supported test configurations

Test Case ID	Description
6.6.2.5-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.6.2.5-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.6.2.5-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table 6.6.2.5.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies are used
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2
Gap Pattern Id		Config 1,2,3	0	As specified in TS 38.133 clause 9.1.2-1
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1.1	

Table 6.6.2.5.4.1-3: Environment test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.1 for DUT part and A.3.1.8.4 for TE part.		

1. Message contents are defined in clause 6.6.2.5.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

6.6.2.5.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.2.5.4.1-2.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.2.5.4.1-2. T2 Starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1040 ms for Test 1 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.), OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.2.5.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-4 with A3-offset = -6dB and Condition SSB Index Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 and gap offset = 9 Table H.3.1-7 with Conditions INTER-FREQ and SSB Index
Specific message contents exceptions for Test Configuration 6.6.2.5-1	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 6.6.2.5-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 6.6.2.5-3	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

6.6.2.5.5 Test requirement

Table 6.6.2.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		-	
			Config 2	SR.1.1 TDD			
			Config 3	SR 2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR 2.1 TDD			
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD		-	
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	

		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.4	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.2.6 NR SA FR1-FR1 event-triggered reporting in DRX with SSB time index detection

6.6.2.6.1 Test purpose

To verify that the UE makes correct reporting of an event in DRX within inter-frequency NR cell search requirements with SSB time index detection in TS 38.133 [6] clause 9.3.4.

6.6.2.6.2 Test applicability

This test applies to all types of NR UE Release 15 and forward supporting 5GS NR SA FR1 and long DRX cycle.

6.6.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.2.6.

6.6.2.6.4 Test description

6.6.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.2.6.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.2.6.4.1-2. Test environment parameters are given in Table 6.6.2.6.4.1-3.

Table 6.6.2.6.4.1-1: SA FR1-FR1 event triggered reporting tests in DRX with SSB time index detection supported test configurations

Test Case ID	Description
6.6.2.6-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
6.6.2.64-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6.6.2.6-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table 6.6.2.6.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies are used
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2
Gap Pattern Id		Config 1,2,3	0		As specified in TS 38.133 clause 9.1.2-1
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.7	As specified in clause A.5
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells

T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.3	13.5	

Table 6.6.2.6.4.1-3: Test Environment parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.1 for DUT part and A.3.1.8.4 for TE part.		

1. Message contents are defined in clause 6.6.2.6.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Table Annex C.1.2.

6.6.2.6.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.2.6.4.1-2 and Table 6.6.2.6.5-1.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.2.6.5-1. T2 Starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1280 ms for Test 1 or 12160 ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

- if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.), OR
- if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 6.6.2.6.4.1-2 as appropriate.

6.6.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.2.6.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-4 with A3-offset = -6dB and Condition SSB Index Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 and gap offset = 9 Table H.3.1-7 with Conditions INTER-FREQ and SSB Index Table H.3.7-1 with Condition DRX.1 and Gap and INTER-FREQ for Test 1 Table H.3.7-1 with Condition DRX.7 and Gap and INTER-FREQ for Test 2
Specific message contents exceptions for Test Configuration 6.6.2.6-1	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 6.6.2.6-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 6.6.2.6-3	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

6.6.2.6.5 Test requirement

Table 6.6.2.6.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.2.6.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1	FDD			
		Config 2,3	TDD			
TDD configuration		Config 1	Not Applicable			
		Config 2	TDDConf.1.1			
		Config 3	TDDConf.2.1			
$BW_{channel}$	MHz	Config 1,2	10: $N_{RB,c}$ = 52			
		Config 3	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,2	10: $N_{RB,c}$ = 52			
		Config 3	40: $N_{RB,c}$ = 106			
Initial DL BWP			DLBWP.0.1		NA	

BWP configuration	Initial UL BWP		Config 1, 2, 3	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		-	
			Config 2	SR.1.1 TDD			
			Config 3	SR 2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR 2.1 TDD			
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD		-	
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz		Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	dBm/15 kHz			-98		-98	
N_{oc} Note2	dBm/SCS		Config 1,2	-98		-98	
			Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS		Config 1,2	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB		Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB		Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz		Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz		Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

In test 1 and 2, UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.2.7 Void

6.6.2.8 Void

6.6.2.9 SA event triggered reporting tests with additional mandatory gap pattern

6.6.2.9.1 Test purpose

To verify that the UE makes correct reporting of an event when mandatory gap pattern with 3ms MGL is configured within inter-frequency NR cell search requirements in TS 38.133 [6] clause 9.3.4.

6.6.2.9.2 Test applicability

This test applies to all types of NR UE release 16 onwards supporting *supportedGapPattern-NRonly-r16* and Gap Pattern 3.

6.6.2.9.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.2.9.

6.6.2.9.4 Test description

6.6.2.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.2.9.4.1-1.

Table 6.6.2.9.4.1-1: SA FR1 event triggered reporting tests with additional mandatory gap pattern supported test configurations

Configuration	Description
6.6.2.9-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD – TDD duplex mode
6.6.2.9-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD – TDD duplex mode
6.6.2.9-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD – TDD duplex mode
NOTE.1: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.2.9.4.1-2.

Table 6.6.2.9.4.1-2: Test Environment parameters for SA FR1 event triggered reporting tests with additional mandatory gap pattern

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2..		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.2.9.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.1 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.2.9.4.1-3.
2. Message contents are defined in clause 6.6.2.9.4.3.
3. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

Table 6.6.2.9.4.1-3: General test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	3	As specified in clause TS 38.133 [6] 9.1.2-1.
Measurement gap offset		Config 1	12	
		Config 2,3	9	
SMTC-SSB parameters		Config 1	SSB.1 FR1	As specified in clause A.3.10.1
		Config 2	SSB.1 FR1	As specified in clause A.3.10.1
		Config 3	SSB.2 FR1	As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

6.6.2.9.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.2.9.4.1-2.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.2.9.4.1-2. T2 Starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1280 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
     OR:

   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.2.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.2.9.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ
Specific message contents exceptions for Test Configuration 6.6.2.9-1	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.9 Table H.3.1-6 with Conditions gapUE, Pattern #3 and gap offset = 12
Specific message contents exceptions for Test Configuration 6.6.2.9-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4 Table H.3.1-6 with Conditions gapUE, Pattern #3 and gap offset = 9
Specific message contents exceptions for Test Configuration 6.6.2.9-3	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4 Table H.3.1-6 with Conditions gapUE, Pattern #3 and gap offset = 9

6.6.2.9.5 Test requirement

Table 6.6.2.9.5-1 defines the primary level settings including test tolerances for SA inter-frequency event triggered reporting with additional mandatory gap pattern.

Table 6.6.2.9.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
CORESET Reference Channel			Config 1	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			

SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1	SMTC.1		SMTC.9	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

UE is not required to report SSB time index.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

6.6.2.10 SA event triggered reporting tests for FR1 when DRX is used

6.6.2.10.1 Test purpose

To verify that the UE makes correct reporting of an event when no gap is configured and DRX is used within inter-frequency NR cell search requirements in TS 38.133 [6] clause 9.3.9.

6.6.2.10.2 Test applicability

This test applies to all types of NR UE release 16 which supports interFrequencyMeas-Nogap-r16.

6.6.2.10.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.6.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.2.10.

6.6.2.10.4 Test description

6.6.2.10.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.2.10.4.1-1.

Table 6.6.2.10.4.1-1: SA event triggered reporting tests for FR1 without gap when DRX is used supported test configurations

Configuration	Description
6.6.2.10-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.2.10-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.2.10-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 6.6.2.10.4.1-2.

Table 6.6.2.10.4.1-2: Test Environment parameters for SA event triggered reporting tests for FR1 without gap when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2..		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.2.10.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.1 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.2.10.4.1-3.
2. Message contents are defined in clause 6.6.2.10.4.3.
3. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

Table 6.6.2.10.4.1-3: General test parameters for SA event triggered reporting tests for FR1 without gap when DRX is used

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	

CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	DRX.1	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

6.6.2.10.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.2.10.4.1-2.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.2.10.4.1-2. T2 Starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1080 ms for Test Configuration 1 and 900 ms for Test Configuration 2 and 3then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
     OR:

   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 6.6.2.10.4.1-2 as appropriate.

6.6.2.10.4.3 Message contents

Table 6.6.2.10.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 INTER-FREQ
Specific message contents exceptions for Test Configuration 6.6.2.10-1	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 6.6.2.10-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 6.6.2.10-3	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

6.6.2.10.5 Test requirement

Table 6.6.2.10.5-1 defines the primary level settings including test tolerances for SA event triggered reporting tests for FR1 without gap when DRX is used.

Table 6.6.2.10.5-1: Cell specific test parameters for SA event triggered reporting tests for FR1 without gap when DRX is used

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	

		Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1	SR.1.1 FDD		NA	
		Config 2	SR.1.1 TDD		NA	
		Config 3	SR2.1 TDD		NA	
CORESET Reference Channel		Config 1	CR.1.1 FDD		NA	
		Config 2	CR.1.1 TDD		NA	
		Config 3	CR2.1 TDD		NA	
SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2,3	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test config 1, UE is required to report SSB time index. UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the

beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

In test config 2 and 3, UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 900 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.2.11 SA event triggered reporting tests for FR1 without gap when DRX is not used

6.6.2.11.1 Test purpose

To verify that the UE makes correct reporting of an event when no gap is configured and DRX is not used within inter-frequency NR cell search requirements in TS 38.133 [6] clause 9.3.9.

6.6.2.11.2 Test applicability

This test applies to all types of NR UE release 16 which supports interFrequencyMeas-Nogap-r16.

6.6.2.11.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.6.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.2.11.

6.6.2.11.4 Test description

6.6.2.11.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.2.11.4.1-1.

Table 6.6.2.11.4.1-1: SA event triggered reporting tests for FR1 without gap when DRX is not used supported test configurations

Configuration	Description
6.6.2.11-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD – TDD duplex mode
6.6.2.11-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD – TDD duplex mode
6.6.2.11-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD – TDD duplex mode
NOTE.1: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.2.11.4.1-2.

Table 6.6.2.11.4.1-2: Test Environment parameters for SA event triggered reporting tests for FR1 without gap when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2..		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.2.11.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.1 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.2.10.4.1-3.

2. Message contents are defined in clause 6.6.2.10.4.3.

3. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

Table 6.6.2.11.4.1-3: General test parameters for SA event triggered reporting tests for FR1 without gap when DRX is not used

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

6.6.2.11.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.2.11.4.1-2.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.2.11.4.1-2. T2 Starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 800 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

- switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

- if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.), OR:

  - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 6.6.2.11.4.1-2 as appropriate.

6.6.2.11.4.3 Message contents

Table 6.6.2.11.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ
Specific message contents exceptions for Test Configuration 6.6.2.11-1	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 6.6.2.11-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 6.6.2.11s-3	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

6.6.2.11.5 Test requirement

Table 6.6.2.11.5-1 defines the primary level settings including test tolerances for SA event triggered tests for FR1 without gap when DRX is not used.

Table 6.6.2.11.5-1: Cell specific test parameters for SA event triggered reporting tests for FR1 without gap when DRX is not used

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1	FDD			
		Config 2,3	TDD			
TDD configuration		Config 1	Not Applicable			

			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
CORESET Reference Channel			Config 1	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz		-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98	
			Config 3	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
		dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15

Propagation Condition		Config 1,2,3	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The UE is not required to read the neighbour cell SSB index in this test.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

6.6.2.12 NR SA FR1-FR1 event triggered reporting tests without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17

6.6.2.12.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event when UE is configured with highSpeedMeasInterFreq-r17. This test will partly verify the SA inter-frequency NR cell search requirements in 38.133 [6] clause 9.3.4.

6.6.2.12.2 Test applicability

This test applies to all types of E-UTRA UE release 17 and forward supporting enhanced inter-frequency NR measurement requirements in high-speed scenario (*measurementEnhancementInterFreq-r17*, as defined in TS 38.306).

6.6.2.12.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.2.12

6.6.2.12.4 Test description

6.6.2.12.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.2.12.4.1-1.

Table 6.6.2.12.4.1-1: Supported test configurations for NR SA FR1-FR1 event triggered reporting tests without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17

Config	Description
6.6.2.12-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.2.12-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.2.12-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 6.6.2.12.4.1-2.

Table 6.6.2.12.4.1-2: Initial conditions for NR SA FR1-FR1 event triggered reporting tests without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 6.6.2.12.4.1-1.	

Propagation conditions	AWGN		As specified in clause C.2.1.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.1 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.2.12.4.1-3.
2. Message contents are defined in clause 6.6.2.12.4.3.
3. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

Table 6.6.2.12.4.1-3: General test parameters for NR SA FR1-FR1 event triggered reporting tests without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	DRX.14	As specified in clause A.5
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	2.3	

6.6.2.12.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 6.6.2.12.4.1-2.
3. The SS shall transmit an *RRCReconfiguration* message.
4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.2.12.4.1-2. T2 Starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 2242 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and proceed with step 1,
   OR:
   - if the device has been switched off, proceed with step 1.

10. Repeat step 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.2.12.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.2.12.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 and gap offset = 9 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.14
Specific message contents exceptions for Test Configuration 6.6.2.12-1	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 6.6.2.12-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Test Configuration 6.6.2.12-3	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

Table 6.6.2.12.4.3-2: *SIB4*: NR inter frequency cell re-selection with highSpeedMeasInterFreq-r17

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
InterFreqCarrierFreqInfo-v1700 ::= SEQUENCE {			
highSpeedMeasInterFreq-r17	TRUE		

}			
}			

6.6.2.12.5 Test requirement

Table 6.6.2.12.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 event triggered reporting tests without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17.

Table 6.6.2.12.5-1: NR cell specific test parameters for NR SA FR1-FR1 event triggered reporting tests without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Pattern			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR.2.1 TDD		NA	
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD		NA	
			Config 2	CCR.1.1 TDD		NA	
			Config 3	CCR.2.1 TDD		NA	
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2,3	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2	AWGN		AWGN 1944Hz Note 5	
		Config 3	AWGN		AWGN 3334Hz Note 6	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The AWGN 1944 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 1944Hz.

Note 6: The AWGN 3334 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 2240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

UE is not required to report SSB time index.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The actual overall delays measured in the test is 2ms higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.6.6.3 Inter-RAT Measurements

6.6.2.13 NR SA FR1-FR1 event triggered reporting using MUSIM gap with lower and higher priority

6.6.2.13.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event on an inter-frequency layer based on measurement performed within measurement gaps when UE is also configured with MUSIM gaps. This test will partly verify the SA inter-frequency NR cell search requirements in TS 38.133 [6] clause 9.3.4. In addition, the test will verify that UE makes correct transmission/reception during occasions of measurement gaps and MUSIM gaps that are dropped due to collision handling as defined in TS 38.133 [6] clause 9.1.10.

6.6.2.13.2 Test applicability

This test applies to all types of NR UE release 18 and forward, supporting providing MUSIM assistance information with MUSIM gap preference and related MUSIM gap configuration.

6.6.2.13.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.6.2.0.1 and 6.6.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.2.13.

6.6.2.13.4 Test description

6.6.2.13.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.2.13.4.1-1.

Table 6.6.2.13.4-1: Supported test configurations for NR SA FR1-FR1 event triggered reporting using MUSIM gap with lower and higher priority

Config	Description
6.6.2.13-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.2.13-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.2.13-3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 6.6.2.13.4.1-2.

Table 6.6.2.13.4.1-2: Initial conditions for NR SA FR1-FR1 event triggered reporting using MUSIM gap with lower and higher priority

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.2.13.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.2.13.4.1-3.

2. Message contents are defined in clause 6.6.2.13.4.3.

3. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

Table 6.6.2.13.4.1-3: General test parameters for NR SA FR1-FR1 event triggered reporting using MUSIM gap with lower and higher priority

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used
Active cell		Config 1,2,3	NR Cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1
Neighbour cell		Config 1,2,3	NR Cell 2	NR Cell 2 is on NR RF channel number 2.
Measurement gap Pattern Id		Config 1,2,3	0	As specified in clause TS 38.133 [6] 9.1.2-1
Measurement gap offset	ms	Config 1,2,3	9	
MUSIM gap Pattern Id		Config 1,2,3	1	
MUSIM gap offset	ms	Config 1,2,3	2	
SMTC-SSB parameters		Config 1	SSB.1 FR1	As specified in clause A.3.1
		Config 2	SSB.1 FR1	As specified in clause A.3.1
		Config 3	SSB.2 FR1	As specified in clause A.3.1
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	
T3	s	Config 1,2,3	5	
T4	s	Config 1,2,3	1.3	

6.6.2.13.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency from the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.2.13.4.1-3 and Table 6.6.2.13.5-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of four successive time periods, with time duration of T1, T2, T3 and T4 respectively. During time duration T1 and T3, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.2.13.5-1.

3. SS shall transmit an *RRCReconfiguration* message with *measConfig* and *musim-GapConfig-r17*. Priority of MISIM gap is lower than the priority of the measurement gap configured by *GapConfig-r17*.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. The SS starts continuously scheduling PDSCH reception on every DL slot not overlapped with measurement gap occasions.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.2.13.5-1. T2 starts.

7. If UE

a) transmits a *MeasurementReport* message triggered by Event A3 within 922ms from the beginning of time period T2, and

b) sends HQRQ ACK/NACK for every corresponding PDSCH scheduled in PCell if PDSCH and PUCCH are not overlapped with the measurement gap occasions in time period T1 and T2.

Then the number of successes for the event “low priority MUSIM gap” is increased by one. Otherwise, count a fail for the event “low priority MUSIM gap” and go to step 14.

8. when T2 expires, set the parameters according to T3 in Table 6.6.2.13.5-1. The SS stops scheduling PDSCH reception. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008).

9. SS shall transmit an *RRCReconfiguration* message to reconfigure MUSIM gap with priority higher than measurement gap configured by *GapConfig-r17*.

10. The UE shall transmit *RRCReconfigurationComplete* message. T3 starts.

11. The SS starts continuously scheduling PDSCH reception on every DL slot not overlapped with MUSIM gap occasions and measurement gap occasions that are not colliding with MUSIM gap.

12.When T3 expires, the SS shall switch the power setting from T3 to T4 as specified in Table 6.6.2.13.5-1. T4 starts.

13. If UE

a) transmits a *MeasurementReport* message triggered by Event A3 within 1282 ms from the beginning of time period T4, and

b) sends HQRQ ACK/NACK for every corresponding PDSCH scheduled in PCell if PDSCH and PUCCH are not overlapped with the MUSIM gap occasions and measurement gap occasions that are not colliding with MUSIM gap in time period T3 and T4.

Then the number of successes for the event “high priority MUSIM gap” is increased by one. Otherwise, count a fail for the event “high priority MUSIM gap” and go to step 14.

14. After the SS receive the *MeasurementReport* message in step 13) or when T4 expires, the SS shall stop scheduling PDSCH reception and:

- transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

or

- switch the UE off.

15. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

16. Depending on the choice in Step 14, the SS:
- if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
or
- if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED

with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

17. Repeat step 2-16 until the confidence level according to Tables G.2.3-1 in Annex G.2 is achieved. Each of the events “low priority MUSIM gap” and “high priority MUSIM gap” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. If all events pass, the test passes. If one event fails, the test fails.

6.6.2.13.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.2.13.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-4 with Condition SSB Index and A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ
Specific message contents exceptions for Test Configuration 6.6.2.13-1	Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 6.6.2.13-2	Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5
Specific message contents exceptions for Test Configuration 6.6.2.13-3	Table H.3.1-3 with Condition INTER-FREQ MO, SSB.2 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

Table 6.6.2.13.4.3-2: RRCReconfiguration: NR measurement Configuration (Step 3 and Step 9, test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig-DEFAULT specified in Table H.3.1-2 with Condition INTER-FREQ and GAP NEED	Measurement configuration	Step 3
	Not present		Step 9
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
musim-GapConfig-r17 CHOICE {			
setup	MUSIM-GapConfig	MUSIM gap configuration Table 6.6.2.13.4.3-4	
}			
}			
}			
}			
}			
}			
}			
}			
}			

Table 6.6.2.13.4.3-3: MeasGapConfig (Table 6.6.2.13.4.3-2)

Derivation Path: Table H.3.1-6 with condition MGe and Pattern #0			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapFR2	not present		
gapFR1	not present		
gapUE	not present		
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	1 entry		
GapConfig-r17[1] SEQUENCE {		Entry 1	
gapOffset-r17	9		
}			
}			
}			

Table 6.6.2.13.4.3-4: MUSIM-GapConfig (Table 6.6.2.13.4.3-2)

Derivation Path: TS 38. 508-1 [14], Table 4.6.3-82BA			
Information Element	**Value/remark**	**Comment**	**Condition**
MUSIM-GapConfig-r17 ::= SEQUENCE {			
musim-GapToReleaseList-r17	not present		
musim-GapToAddModList-r17 SEQUENCE (SIZE (1..3)) OF MUSIM-Gap-r17 {	1 entry		
MUSIM-Gap-r17[1] SEQUENCE {		Entry 1	
musim-GapId-r17	0		
musim-GapInfo-r17 SEQUENCE {			
musim-Starting-SFN-AndSubframe-r17	not present		
musim-GapLength-r17	ms6	Pattern #1	
musim-GapRepetitionAndOffset-r17 CHOICE {			
ms80	2	Pattern #1	
}			
}			
}			
}			
musim-AperiodicGap-r17	not present		
musim-GapToAddModListExt-v1820 SEQUENCE (SIZE (1..3)) OF MUSIM-GapExt-v1820 {	1 entry		
MUSIM-GapExt-v1820 SEQUENCE {		Entry 1	
gapPriority-r18	3		Step 3
	1		Step 9
}			
musim-GapKeep-r18	not present		
}			

6.6.2.13.5 Test requirement

Table 6.6.2.13.4.1-3 and Table 6.6.2.13.5-1 define the primary level settings including test tolerances for NR SA event triggered reporting test with MUSIM gap configured.

Table 6.6.2.13.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1, T3	T2, T4	T1, T3	T2, T4
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1	FDD			
		Config 2,3	TDD			
TDD configuration		Config 1	Not Applicable			
		Config 2	TDDConf.1.1			
		Config 3	TDDConf.2.1			
$BW_{channel}$	MHz	Config 1,2	10: $N_{RB,c}$ = 52			
		Config 3	40: $N_{RB,c}$ = 106			

BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD			
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz		-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98	
			Config 3	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
		dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

During T1 and T2, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the measurement gap occasions.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

During T3 and T4, after UE sends RRC ReconfigurationComplete message for the reconfiguration of MUSIM gap priority, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with

- MUSIM gap occasions, and
- measurement gap occasions that are not colliding with MUSIM gap.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T4. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

UE is not required to report SSB time index.

The rate of correct events observed during repeated tests shall be at least 90%.

The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.2.14 NR SA FR1-FR1 event triggered reporting using MUSIM gap with shorter MGRP

Editor's Note: This test case is incomplete in following aspects:

TT analysis is still missing.

6.6.2.14.1 Test purpose

The purpose of this test is to verify that the MUSIM gap capable UE makes correct reporting of an event when MUSIM gap collides with measurement gaps without assigned priority. This test will partly verify the SA inter-frequency NR cell search requirements in clause TS 38.133 [6] 9.3.4. This test is conducted assuming that the measurement gap is configured as Gap(s) configured via GapConfig without suffix, and the MUSIM gap parameters are configured as requested by UE.

6.6.2.14.2 Test applicability

This test applies to all types of NR UE release 18 and forward, supporting providing MUSIM assistance information with MUSIM gap preference and related MUSIM gap configuration.

6.6.2.14.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.6.2.0.1 and 6.6.2.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.2.14.

6.6.2.14.4 Test description

6.6.2.14.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.2.14.4.1-1.

Table 6.6.2.14.4.1-1: Supported test configurations for NR SA FR1-FR1 event-triggered reporting using MUSIM gap with shorter MGRP

Configuration	Description
6.6.2.14-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.2.14-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.2.14-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note1: The UE is only required to be tested in one of the supported test configurations. Note2: target NR cell has the same SCS, BW and duplex mode as NR serving cell.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.2.14.4.1-2.

Table 6.6.2.14.4.1-2: Initial conditions for NR SA FR1-FR1 event-triggered reporting using MUSIM gap with shorter MGRP

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.2.14.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.2.14.4.1-3.
2. Message contents are defined in clause 6.6.2.14.4.3.
3. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

Table 6.6.2.14.4.1-3: General test parameters for NR SA FR1-FR1 event-triggered reporting using MUSIM gap with shorter MGRP

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR Cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR Cell 2	NR Cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	1	As specified in clause TS 38.133 [6] 9.1.2-1.
Measurement gap offset		Config 1,2,3	4	
MUSIM Gap Pattern Id		Config 1,2,3	0	As specified in clause TS 38.133 [6] 9.1.10-1
MUSIM gap offset		Config 1,2,3	39	

A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

6.6.2.14.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 6.6.2.14.4.1-3 and Table 6.6.2.14.5-1, respectively. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

Measurement gap pattern configuration defined in Table 6.6.2.14.4.1-3 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap. In test 1 measurement gap pattern configuration # 1 as defined in Table 6.6.2.14.4.1-3 is provided for a UE that does not support per-FR gap and in test 2 without measurement gap pattern configuration as defined in Table 6.6.2.14.4.1-3 is provided for UE that support per-FR gap.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.2.14.5-1.

3. SS shall transmit an *RRCReconfiguration* message with *measConfig* and *musim-GapConfig-r17*.

4. The UE shall transmit an *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.2.14.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1282 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

- transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

OR

- switch the UE off.

8. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause

4.5),
Or
- if the device has been switched off, switche on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.2.14.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.2.14.4.3-1: Common Exception messages SA inter frequency event triggered reporting using MUSIM gap with shorter MGRP

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ
Specific message contents exceptions for Test Configuration 6.6.2.14-1	Table H.3.1-3 with Conditions INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.7
Specific message contents exceptions for Test Configuration 6.6.2.14-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.7
Specific message contents exceptions for Test Configuration 6.6.2.14-3	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.7

Table 6.6.2.14.4.3-2: RRCReconfiguration: NR measurement Configuration (Step 3, test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig-DEFAULT specified in Table H. 3.1-2 with Condition INTER-FREQ and GAP NEEDED	Measurement configuration	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
musim-GapConfig-r17 CHOICE {			
setup	MUSIM-GapConfig	MUSIM gap configuration Table 6.6.2.14.4.3-4	
}			
}			
}			
}			
}			
}			
}			
}			
}			

Table 6.6.2.14.4.3-3: MeasGapConfig (Table 6.6.2.14.4.3-2)

Derivation Path: Table H.3.1-6 with condition gapUE

Information Element	Value/remark	Comment	Condition
MeasGapConfig ::= SEQUENCE {			
gapUE CHOICE {	1 entry		
setup SEQUENCE {		1entry	test 1
gapOffset	4		
mgl	ms6	Pattern#1	
mgrp	ms80	Pattern#1	
}			
}			
}			

Table 6.6.2.14.4.3-4: MUSIM-GapConfig (Table 6.6.2.14.4.3-2)

Derivation Path: TS 38. 508-1 [14], Table 4.6.3-82BA			
Information Element	**Value/remark**	**Comment**	**Condition**
MUSIM-GapConfig-r17 ::= SEQUENCE {			
musim-GapToReleaseList-r17	not present		
musim-GapToAddModList-r17 SEQUENCE (SIZE (1..3)) OF MUSIM-Gap-r17 {	1 entry		
MUSIM-Gap-r17[1] SEQUENCE {		entry 1	
musim-GapId-r17	0		
musim-GapInfo-r17 SEQUENCE {			
musim-Starting-SFN-AndSubframe-r17	not present		
musim-GapLength-r17	ms6	Pattern #0	
musim-GapRepetitionAndOffset-r17 CHOICE {			
ms40	39	Pattern #0	
}			
}			
}			
}			
musim-AperiodicGap-r17	not present		
}			

6.6.2.14.5 Test requirement

Table 6.6.2.14.4.1-3 and Table 6.6.2.14.5-1 define the primary level settings including test tolerances for NR SA FR1-FR1 event-triggered reporting using MUSIM gap with shorter MGRP.

Table 6.6.2.14.5-1: NR Cell specific test parameters for NR SA FR1-FR1 event-triggered reporting using MUSIM gap with shorter MGRP

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	

		Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1	SR.1.1 FDD			
		Config 2	SR.1.1 TDD			
		Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1	CR.1.1 FDD			
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1	CCR.1.1 FDD			
		Config 2	CCR.1.1 TDD			
		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1,2,3	SMTC.7		SMTC.7	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test 1 with per-UE gap and in test 2 without the gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2.

The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured shall be less than a total of 1282 ms in this test case (note: this gives a total of 800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.2.15 NR SA FR1 event triggered reporting without SSB index detection in DRX mode for UE operating on a cell with less than 5MHz BW

Editor's Note: This test case is incomplete in following aspects:

- Some parameters are not defined yet.
- TT analysis is missing.
- Test applicability is missing.

6.6.2.15.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting of an event without SSB time index in DRX mode when the inter-frequency target cell is less than 5MHz bandwidth. This test will partly verify the inter-frequency cell search requirements in TS 38.133 [6] clause 9.3.4.

6.6.2.15.2 Test applicability

This test applies to all types of NR UE Release 18 supporting less than 5 MHz bandwidth.

6.6.2.15.3 Minimum conformance requirements

The minimum conformance requirements are specified in TS 38.133 [6] clause 9.3.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.2.15.

6.6.2.15.4 Test description

6.6.2.15.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.2.15.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.2.2.4.1-2 with config 1 apply to this test. Test environment parameters are given in Table 6.6.2.15.4.1-2.

Table 6.6.2.15.4.1-1: SA FR1 event triggered reporting tests in DRX supported test configuration

Test Case ID	Description
6.6.2.15-1	NR 15 kHz SSB SCS, 3 MHz bandwidth, FDD duplex mode
Note 1: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table 6.6.2.15.4.1-2: Test Environment parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.2.15.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.

Connection Diagram	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. Message contents are defined in clause 6.6.2.15.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex [C.1.2] and C.1.3.

6.6.2.15.4.2 Test procedure

The test procedures are same as 6.6.2.2.4.2 except these steps:

2. Set the parameters according to T1 in Table 6.6.2.2.4.1-2 config 1 and Table 6.6.2.2.5-1 config 1 with the exceptions specified in Table 6.6.2.15.5-1.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.2.2.5-1 config 1 with the exceptions specified in Table 6.6.2.15.5-1. T2 Starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1082 ms for Test 1 or 10242 ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

6.6.2.15.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clauses 4.6 and 7.3 with the following exceptions:

Table 6.6.2.15.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.y FR1 and Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5 Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 and gap offset = 9 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 and Gap and INTER-FREQ for Test 1 Table H.3.7-1 with Condition DRX.7 and Gap and INTER-FREQ for Test 2

6.6.2.15.5 Test requirement

Table 6.6.2.2.5-1 config 1 with the exceptions specified in Table 6.6.2.15.5-1 defines the primary level settings for all tests.

Table 6.6.2.15.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Duplex mode		Config 1	FDD			
$BW_{channel}$	MHz	Config 1	3: $N_{RB,c}$ = 15			

BWP BW	MHz	Config 1	3: $N_{RB,c}$ = 15			
PDSCH Reference measurement channel		Config 1	[SR.1.2 FDD]		NA	
RMSI CORESET Reference Channel		Config 1	[CR.1.3 FDD]		NA	
Dedicated CORESET Reference Channel		Config 1	[CCR.1.7 FDD]		NA	
SSB parameters		Config 1	[SSB.13 FR1]		SSB.y FR1	
Io[Note3]	dBm/3 MHz	Config 1	-69.9+TT	-69.9+TT	-75.4+TT	-67.6+TT

In test 1 and 2, UE is not required to report SSB time index.

The overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delays measured shall be less than a total of 1082 ms in test 1 and 10242 ms for test 2 (note: the total measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.6.3

6.6.3.0 Minimum conformance requirements

6.6.3.0.1 Minimum conformance requirements for inter-RAT event triggered reporting to E-UTRAN FDD

The requirements are applicable for NR−E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN FDD cell is considered to be detectable when:

- RSRP related conditions in the accuracy requirements in TS 38.133 [6] Section 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],
- RSRQ related conditions in the accuracy requirements in TS 38.133 [6] Section 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],
- RS-SINR related conditions in the accuracy requirements in TS 38.133 [6] Section 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [23].

6.6.3.0.1.1 Requirements when no DRX is used

When the UE requires measurement gaps to identify and measure inter-RAT cells and an appropriate measurement gap pattern is scheduled, the UE shall be able to identify a new detectable FDD cell within $T_{Identify,\ E\text{-}UTRAN\ FDD}$ according to the following expression:

$$T_{Identify,E-UTRAN\ FDD} = T_{BasicIdentify} * \frac{480}{T_{Inter1}} * CSSF_{interRAT} \quad ms,$$

where:

$T_{BasicIdentify}$ = 480 ms,

T_{Inter1} is defined in TS 38.133 [6] section 9.4.1,

$CSSF_{interRAT} = CSSF_{within_gap_i_}$ is the scaling factor for the measured inter-RAT E-UTRA carrier i which is calculated as specified in TS 38.133 [6] section 9.1.5.2.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{Measure, E\text{-}UTRAN\ FDD}$ defined in Table 6.6.3.0.1.1-1.

Table 6.6.3.0.1.1-1: Measurement period and measurement bandwidth

Configuration	Physical Layer Measurement period: $T_{Measure, E\text{-}UTRAN\ FDD}$ [ms]	Measurement bandwidth [RB]
0	480 x $CSSF_{interRAT}$	6
1 (note 1)	240 x $CSSF_{interRAT}$	50
NOTE 1: This configuration is optional.		

The UE shall be capable of identifying and performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 E-UTRAN FDD cells per E-UTRA FDD carrier frequency layer for up to 7 E-UTRA FDD carrier frequency layers.

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] section 10.2.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] section 10.2.3. The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] section 10.2.5.

6.6.3.0.1.2 Requirements when DRX is used

When DRX is in use and measurement gaps are configured, the UE shall be able to identify a new detectable E-UTRAN FDD cell within $T_{Identify, E\text{-}UTRAN\ FDD}$ specified in Table 6.6.3.0.1.2-1. When RRM enhancement for high speed is configured the UE shall be able to identify a new detectable E-UTRAN FDD cell within $T_{Identify, E\text{-}UTRAN\ FDD}$ specified in Table 6.6.3.0.1.2-2.

Table 6.6.3.0.1.2-1: Requirement to identify a newly detectable E-UTRAN FDD cell

DRX cycle length (s)	$T_{Identify, E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)	
	Gap period = 40 ms, 20 ms	Gap period = 80 ms
≤0.16	Non-DRX requirements in Section 6.6.3.0.1.1 apply	Non-DRX requirements in Section 6.6.3.0.1.1 apply
0.256	5.12*K (20*$CSSF_{interRAT}$)	7.68*K (30*$CSSF_{interRAT}$)
0.32	6.4*K (20*$CSSF_{interRAT}$)	7.68*K (24*$CSSF_{interRAT}$)
0.32< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT}$)	Note1 (20*$CSSF_{interRAT}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT}$ is as defined in Section 6.6.3.0.1.1.		

Table 6.6.3.0.1.2-2: Requirement to identify a newly detectable E-UTRAN FDD cell for UE configured with RRM enhancement for high speed

DRX cycle length (s)	$T_{Identify, E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)	
	Gap period = 40 ms, 20 ms	**Gap period = 80 ms**
≤0.16	Non-DRX requirements in clause 9.4.2.2 apply	Non-DRX requirements in clause 9.4.2.2 apply
0.16<DRx cycle<=0.32	Note 1(15*$CSSF_{interRAT}$)	
0.32<DRx cycle <= 0.64	Note 1(10*$CSSF_{interRAT}$)	
DRx cycle = 1.024	Note 1(10*$CSSF_{interRAT}$)	Note 1(10*$CSSF_{interRAT}$)
DRx cycle = 1.28	Note 1(8*$CSSF_{interRAT}$)	Note 1(8*$CSSF_{interRAT}$)
1.28< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT}$)	Note1 (20*$CSSF_{interRAT}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT}$ is as defined in clause 9.4.2.2.		

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN FDD cells per E-UTRA FDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA FDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{measure, E\text{-}UTRAN\ FDD}$ specified in Table 6.6.3.0.1.2-3.

Table 6.6.3.0.1.2-3: Requirement to measure E-UTRAN FDD cells

DRX cycle length (s)	$T_{measure, E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)
≤0.08	Non-DRX requirements in Section 6.6.3.0.1.1 apply
0< DRX-cycle ≤10.24	Note1 (5* $CSSF_{interRAT}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT}$ is as defined in Section 6.6.3.0.1.1.	

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] Section 10.2.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] Section 10.2.3. The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] Section 10.2.5.

6.6.3.0.1.3 Measurement reporting requirements for Event-Triggered Reporting

The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The UE shall not send any event-triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify, E\text{-}UTRAN\ FDD}$ defined in clauses 6.6.3.0.1.1 and 6.6.3.0.1.2 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{Identify, E\text{-}UTRAN\ FDD}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [13], the event triggered measurement reporting delay shall be less than $T_{Measure, E\text{-}UTRAN\ FDD}$ provided the timing to that cell has not changed more than ± 50 Ts while measurement gap has not been available and the L3 filter has not been used.

The normative reference for this requirement is TS 38.133 [6] clause 9.4.2.

6.6.3.0.2 Minimum conformance requirements for inter-RAT event triggered reporting to E-UTRAN TDD

The requirements are applicable for NR−E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN TDD cell is considered to be detectable when:

- RSRP related conditions in the accuracy requirements in TS 38.133 [6] Section 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],

- RSRQ related conditions in the accuracy requirements in TS 38.133 [6] Section 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],

- RS-SINR related conditions in the accuracy requirements in TS 38.133 [6] Section 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [23].

6.6.3.0.2.1 Requirements when no DRX is used

When the UE requires measurement gaps to identify and measure inter-RAT cells and an appropriate measurement gap pattern is scheduled, the UE shall be able to identify a new detectable TDD cell within $T_{Identify,\ E\text{-}UTRAN\ TDD}$ according to the following expression:

- When configuration 0 or configuration 1 in Table 6.6.3.0.2-1 is applied,

$$T_{Identify,E-UTRAN\ TDD} = T_{BasicIdentify} * \frac{480}{T_{Inter1}} * CSSF_{interRAT} \quad ms\ ,$$

- When configuration 2 or configuration 3 in Table 6.6.3.0.2-1 is applied,

$$T_{Identify,E-UTRAN\ TDD} = (T_{BasicIdentify} * \frac{480}{T_{Inter1}} + 240) * CSSF_{interRAT} \quad ms,$$

where:

$T_{BasicIdentify}$ = 480 ms,

T_{Inter1} is defined in TS 38.133 [6] section 9.4.1,

$CSSF_{interRAT}$ = $CSSF_{within_gap_i_}$ is the scaling factor for the measured inter-RAT E-UTRA carrier i which is calculated as specified in TS 38.133 [6] section 9.1.5.2.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{Measure,\ E\text{-}UTRAN\ TDD}$ defined in Table 6.6.3.0.2.1-1.

Table 6.6.3.0.2.1-1: $T_{Measure,\ E\text{-}UTRAN\ TDD}$ for different configurations

Configuration	Measurement bandwidth [RB]	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		$T_{Measure,\ E\text{-}UTRAN\ TDD}$ [ms]
		DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	480 x $CSSF_{interRAT}$
1 (note 1)	50	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	240 x $CSSF_{interRAT}$
2	6	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	720 x $CSSF_{interRAT}$
3 (Note 1)	50	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	480 x $CSSF_{interRAT}$
NOTE 1: This configuration is optional. NOTE 2: Void						

The UE shall be capable of identifying and performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 E-UTRAN TDD cells per E-UTRA TDD carrier frequency layer for up to 7 E-UTRA TDD carrier frequency layers.

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] section 10.2.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] section 10.2.3. The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] section 10.2.5.

6.6.3.0.2.1 Requirements when DRX is used

When DRX is in use and measurement gaps are configured, the UE shall be able to identify a new detectable E-UTRAN TDD cell within $T_{Identify,\ E\text{-}UTRAN\ TDD}$ specified in Table 6.6.3.0.2.1-1. When RRM enhancement for high speed is configured the UE shall be able to identify a new detectable E-UTRAN TDD cell within $T_{Identify,\ E\text{-}UTRAN\ TDD}$ specified in Table 6.6.3.0.2.1-2.

Table 6.6.3.0.2.1-1: Requirement to identify a newly detectable E-UTRAN TDD cell

DRX cycle length (s)	$T_{Identify, E-UTRAN TDD}$ (s) (DRX cycles)	
	Gap period = 40 ms, 20 ms	Gap period = 80 ms
≤0.16	Non-DRX requirements in Section 6.6.3.0.2.1 apply	Non-DRX requirements in Section 6.6.3.0.2.1 apply
0.256	5.12*K (20*$CSSF_{interRAT}$)	7.68*K (30*$CSSF_{interRAT}$)
0.32	6.4*K (20*$CSSF_{interRAT}$)	7.68*K (24*$CSSF_{interRAT}$)
0.32< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT}$)	Note1 (20*$CSSF_{interRAT}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT}$ is as defined in Section 6.6.3.0.2.1.		

Table 6.6.3.0.2.1-2: Requirement to identify a newly detectable E-UTRAN TDD cell for UE configured with RRM enhancement for high speed

DRX cycle length (s)	$T_{Identify, E-UTRAN TDD}$ (s) (DRX cycles)	
	Gap period = 40 ms, 20 ms	**Gap period = 80 ms**
≤0.16	Non-DRX requirements in clause 9.4.3.2 apply	Non-DRX requirements in clause 9.4.3.2 apply
0.16<DRx cycle<=0.32	Note 1(15*$CSSF_{interRAT}$)	
0.32<DRx cycle <= 0.64	Note 1(10*$CSSF_{interRAT}$)	
DRx cycle = 1.024	Note 1(10*$CSSF_{interRAT}$)	Note 1(10*$CSSF_{interRAT}$)
DRx cycle = 1.28	Note 1(8*$CSSF_{interRAT}$)	Note 1(8*$CSSF_{interRAT}$)
1.28< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT}$)	Note1 (20*$CSSF_{interRAT}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT}$ is as defined in clause 9.4.3.2.		

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN TDD cells per E-UTRA TDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA TDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{measure, E-UTRAN TDD}$ specified in Table 6.6.3.0.2.1-3.

Table 6.6.3.0.2.1-3: Requirement to measure E-UTRAN TDD cells

DRX cycle length (s)	$T_{measure, E-UTRAN TDD}$ (s) (DRX cycles)
≤0.08	Non-DRX Requirements in Section 6.6.3.0.2.1 apply
0.128	For configuration 2, non-DRX requirements in section 6.6.3.0.2.1 apply, Otherwise: Note1 (5*$CSSF_{interRAT}$)
0.128<DRX-cycle≤10.24	Note1 (5*$CSSF_{interRAT}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT}$ is as defined in Section 6.6.3.0.2.1.	

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] Section 10.2.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] Section 10.2.3. The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] Section 10.2.5.

6.6.3.0.2.3 Measurement reporting requirements for Event-Triggered Reporting

The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The UE shall not send any event-triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that

the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify, E-UTRAN TDD}$ defined in clauses 6.6.3.0.2.1 and 6.6.3.0.2.2 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{Identify, E-UTRAN TDD}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [13], the event triggered measurement reporting delay shall be less than $T_{Measure, E-UTRAN TDD}$ provided the timing to that cell has not changed more than ± 50 Ts while measurement gap has not been available and the L3 filter has not been used.

The normative reference for this requirement is TS 38.133 [6] clause 9.4.3.

6.6.3.1 NR SA FR1 – E-UTRAN event-triggered reporting in non-DRX

6.6.3.1.1 Test purpose

This test is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 under the cell search and measurement requirements.

6.6.3.1.2 Test applicability

This test applies to all types of NR UE supporting SA FR1 from Release 15 onwards.

6.6.3.1.3 Minimum conformance requirements

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.3.1.

6.6.3.1.3.1 NR – E-UTRAN FDD requirement

The minimum conformance requirements are specified in clause 6.6.3.0.1.

6.6.3.1.3.2 NR – E-UTRAN TDD requirement

The minimum conformance requirements are specified in clause 6.6.3.0.2.

6.6.3.1.4 Test description

6.6.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.3.1.4.1-1.

Table 6.6.3.1.4.1-1: supported test configurations

Test Case ID	Description
6.6.3.1-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE FDD
6.6.3.1-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE FDD
6.6.3.1-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE FDD
6.6.3.1-4	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE TDD
6.6.3.1-5	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE TDD
6.6.3.1-6	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.6.3.1.4.1-2 and Table 6.6.3.1.4.1-3.

Table 6.6.3.1.4.1-2: Initial conditions for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-2 and TS 38.508-1 [14] sclause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 6.6.3.1.5-1 and Table 6.6.3.1.5-2..		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

Table 6.6.3.1.4.1-3: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables 6.6.3.1.5-1 and 6.6.3.1.5-2.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in Clause TS 38.133 [6] Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
NOTE 1: Values are defined in Table 6.6.3.1.5-1			

1. Message contents are defined in clause 6.6.3.1.4.3.

2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

6.6.3.1.4.2 Test procedure

The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2. Gap pattern configuration is configured before T2 begins to enable inter-frequency monitoring.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.3.1.5-1 and 6.6.3.1.5-2. Propagation conditions are set according to Annex C clause C.2.2.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.3.1.5-1 and 6.6.3.1.5-2.

6. UE shall transmit a MeasurementReport message triggered by Event B2. If the measurement reporting delay from the beginning of time period T2 is less than 3842ms the number of successful tests is increased by one. If

the UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED according to TS 38.508-1 [14] clause 4.5.4 (if the paging fails, switches off and on the UE and ensures the UE is in the state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5,
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.3.1.4.3-1: Common Exception messages NR SA FR1 – E-UTRAN event-triggered reporting in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-RAT Table H.3.1-3A Table H.3.1-4A Table H.3.1-5 with Condition INTER-RAT Table H.3.1-6 with Condition Pattern #0 Table H.3.1-7 with Condition INTER-RAT
Specific message content exceptions for Test Configurations 6.6.3.1-1 and 6.6.3.1-4	Table H.3.1-3 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Specific message content exceptions for Test Configurations 6.6.3.1-2, 6.6.3.1-3, 6.6.3.1-5 and 6.6.3.1-6	Table H.3.1-3 with Condition Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

6.6.3.1.5 Test requirement

Table 6.6.3.1.5-1 and Table 6.6.3.1.5-2 define the primary level settings including test tolerances for all tests.

Table 6.6.3.1.5-1: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 2, 3	FDD	
			4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
CORESET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern note1			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} note2		dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc} note2		dBm/SCS	1, 2, 4, 5	-104	
			3, 6	-101	

$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17.55	-1.55
$\hat{E}_s/I_{ot}$ note3	dB	1, 2, 3, 4, 5, 6	17.55	-1.55
SS-RSRP note3	dBm/SCS	1, 2, 4, 5	-86.45	-105.55
		3, 6	-83.44	-102.55
SSB_RP note3	dBm/SCS	1, 2, 4, 5	-86.45	-105.55
		3, 6	-83.44	-102.55
Io note3	dBm/9.36 MHz	1, 2, 4, 5	-58.42	-73.74
	dBm/38.16 MHz	3, 6	-52.32	-67.64
Propagation condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.6.3.1.5-2: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration note1		4, 5, 6	6	
TDD uplink-downlink configuration note1		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5MHz: $N_{RB,c}$ = 25 10MHz: $N_{RB,c}$ = 50 20MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel note2		1, 2, 3	5MHz: R.7 FDD 10MHz: R.3 FDD 20MHz: R.6 FDD	
		4, 5, 6	5MHz: R.4 TDD 10MHz: R.0 TDD 20MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel note2		1, 2, 3	5MHz: R.11 FDD 10MHz: R.6 FDD 20MHz: R.10 FDD	
		4, 5, 6	5MHz: R.11 TDD 10MHz: R.6 TDD 20MHz: R.10 TDD	
OCNG Patterns note2		1, 2, 3	5MHz: OP.20 FDD 10MHz: OP.10 FDD 20MHz: OP.17 FDD	
		4, 5, 6	5MHz: OP.9 TDD 10MHz: OP.1 TDD 20MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				

PDSCH_RB OCNG_RA note3 OCNG_RB note3				
N_{oc} note4	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	18.55
$\hat{E}_s/I_{ot}$ note5	dB	1, 2, 3, 4, 5, 6	-Infinity	18.55
RSRP note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-85.45
SCH_RP note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-85.45
Io note5	dBm/9MHz	1, 2, 3, 4, 5, 6	-73.21	-54.60
Propagation Condition not 6		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix note6		1, 2, 3, 4, 5, 6	1x2	
NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24]. NOTE 2: DL RMCs and OCNG patterns are specified in sections A 3.1 and A 3.2 of TS 36.133 [23] respectively. NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 6: Propagation condition and correlation matrix are defined in section B.2 in TS 36.101 [27].				

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3842ms from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The overall delays measured test requirement is expressed as:

$T_{identify,E\text{-}UTRAN\ FDD} = T_{BasicIdentify} * 480 / T_{Inter1} * CSSF_{interRAT}$ ms

Which:

$T_{BasicIdentify} = 480$,

$T_{Inter1} = 60$,

$CSSF_{interRAT} = 1$

TTI insertion uncertainty = TTI_{DCCH} = 1 ms; 2xTTI_{DCCH} = 2 ms

The overall delays measured shall be less than a total of 3842 ms in this test case (note: this gives a total of 3840 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The rate of correct events observed during repeated tests shall be at least 90% with confidence level of 95%.

6.6.3.2 NR SA FR1 – E-UTRAN event-triggered reporting in DRX

6.6.3.2.1 Test purpose

This test is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 when DRX is used under the cell search and measurement requirements.

6.6.3.2.2 Test applicability

This test applies to all types of NR UE Release 15 and forward supporting 5GS NR SA FR1, E-UTRAN and long DRX cycle.

6.6.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 6.6.3.0.1 and 6.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.3.2.

6.6.3.2.4 Test description

6.6.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.3.2.4.1-1.

Table 6.6.3.2.4.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Test Case ID	Description
6.6.3.2-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE FDD
6.6.3.2-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE FDD
6.6.3.2-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE FDD
6.6.3.2-4	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE TDD
6.6.3.2-5	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE TDD
6.6.3.2-6	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.6.3.2.4.1-2 and Table 6.6.3.2.4.1-3.

Table 6.6.3.2.4.1-2: Initial conditions for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-2 and TS 38.508-1 [14] sclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

Table 6.6.3.2.4.1-3: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Value		Comment
NR RF Channel Number		1		1 NR carrier frequency is used in the test
LTE RF Channel Number		2		1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables 6.6.3.2.5-1 and 6.6.3.2.5-2.		
Active cell		Cell 1		Cell 1 is on RF channel number 1
Neighbour cell		Cell 2		Cell 2 is on RF channel number 2
Gap Pattern Id		0		As specified in Clause TS 38.133 [6] Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP		Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP		Measurement quantity for Cell 2
b2-Threshold1	dBm	note 1		SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95		E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0		
TimeToTrigger	s	0		
Filter coefficient		0		L3 filtering is not used
DRX		DRX.1	DRX.7	DRX cycle configurations DRX.1 and DRX.7 are defined in Table A.3.3.1-1 and Table A.3.3.2-1 respectively.
T1	s	5		

T2	s	5	15	
NOTE 1: Values are defined in Table 6.6.3.2.5-1				

1. Message contents are defined in clause 6.6.3.2.4.3.

2. There are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

6.6.3.2.4.2 Test procedure

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

In each test the UE shall be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furhtermore the UE shall be allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.3.2.5-1 and 6.6.3.2.5-2.

3. SS shall transmit an RRCReconfiguration message.

4. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Tables 6.6.3.2.5-1 and 6.6.3.2.5-2. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 3.48 s for Test 1 or less than 12.8 s for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off .

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14+2) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.3.2.4.3-1: Common Exception messages NR SA FR1 – E-UTRAN event-triggered reporting in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-RAT Table H.3.1-3A Table H.3.1-4A Table H.3.1-5 with Condition INTER-RAT Table H.3.1-6 with Condition Pattern #0 Table H.3.1-7 with Condition INTER-RAT Table H.3.7-1 with Condition DRX.1 and Gap for Test 1 Table H.3.7-1 with Condition DRX.7 and OFFSET for Test 2
Specific message content exceptions for Test Configurations 6.6.3.2-1 and 6.6.3.2-4	Table H.3.1-3 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message content exceptions for Test Configurations 6.6.3.2-2, 6.6.3.2-3, 6.6.3.2-5 and 6.6.3.2-6	Table H.3.1-3 with Condition Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

6.6.3.2.5 Test requirement

Table 6.6.3.2.5-1 and Table 6.6.3.2.5-2 defines the primary level settings including test tolerances for all tests.

Table 6.6.3.2.5-1: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 2, 3	FDD	
			4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORESET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	

Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-104	
			3, 6	-101	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	17.55	-1.55
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	17.55	-1.55
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	-86.45	-105.55
			3, 6	-83.44	-102.55
SSB_RP[Note3]		dBm/SCS	1, 2, 4, 5	-86.45	-105.55
			3, 6	-83.44	-102.55
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-58.42	-73.74
		dBm/38.16 MHz	3, 6	-52.32	-67.64
Propagation condition			1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.6.3.2.5-2: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5MHz: $N_{RB,c}$ = 25 10MHz: $N_{RB,c}$ = 50 20MHz: $N_{RB,c}$ = 100	
PDSCH parameters:		1, 2, 3	5MHz: R.7 FDD 10MHz: R.3 FDD	

DL Reference Measurement Channel[Note2]			20MHz: R.6 FDD	
		4, 5, 6	5MHz: R.4 TDD 10MHz: R.0 TDD 20MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5MHz: R.11 FDD 10MHz: R.6 FDD 20MHz: R.10 FDD	
		4, 5, 6	5MHz: R.11 TDD 10MHz: R.6 TDD 20MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5MHz: OP.20 FDD 10MHz: OP.10 FDD 20MHz: OP.17 FDD	
		4, 5, 6	5MHz: OP.9 TDD 10MHz: OP.1 TDD 20MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	18.55
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	18.55
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-85.45
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-85.45
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-73.21	-54.60
Propagation Condition [Note6]		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix [Note6]		1, 2, 3, 4, 5, 6	1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2: DL RMCs and OCNG patterns are specified in sections A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in section B.2 in TS 36.101 [27].

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 12.8s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

6.6.3.3 NR SA FR1 – E-UTRAN event-triggered reporting in DRX for UE configured with highSpeedMeasFlag-r16

6.6.3.3.1 Test purpose

This test is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 when DRX is used under the cell search and measurement requirements for UE configured with RRM enhancement for high speed.

6.6.3.3.2 Test applicability

This test applies to all types of NR UE supporting SA FR1 configured with RRM enhancement for high speed from Release 15 onwards.

6.6.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 6.6.3.0.1 and 6.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.3.3.

6.6.3.3.4 Test description

6.6.3.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.3.3.4.1-1.

Table 6.6.3.3.4.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Test Case ID	Description
6.6.3.3-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE FDD
6.6.3.3-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE FDD
6.6.3.3-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE FDD
6.6.3.3-4	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, LTE TDD
6.6.3.3-5	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, LTE TDD
6.6.3.3-6	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.6.3.3.4.1-2 and Table 6.6.3.3.4.1-3.

Table 6.6.3.3.4.1-2: Initial conditions for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.3.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

Table 6.6.3.3.4.1-3: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test

Channel Bandwidth	MHz	As specified in Tables A.6.6.3.3.1-2 and A.6.6.3.3.1-3.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-97	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		DRX.6	DRX cycle configurations DRX.6 is defined in Table A.3.3.1-6.
T1	s	5	
T2	s	5	
Note 1: Values are defined in TS 38.133 Table 6.6.3.3.5-1			

1. Message contents are defined in clause 6.6.3.3.4.3.

2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

3. UE is configured with highSpeedMeasFlag-r16

6.6.3.3.4.2 Test procedure

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

In each test the UE shall be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furhtermore the UE shall be allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.3.3.5-1 and 6.6.3.3.5-2.

3. SS shall transmit an RRCReconfiguration message.

4. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Tables 6.6.3.3.5-1 and 6.6.3.3.5-2. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 4.8s then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

OR

- switch the UE off .

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14+2) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.3.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks on condition of HighSpeedMeas with exceptions	Table H.2.1-3 with Condition HighSpeedMeas
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-RAT Table H.3.1-3 with Condition SSB.1 FR1 for configuration 6.6.3.3-1, 6.6.3.3-2, 6.6.3.3-4, 6.6.3.3-5 Table H.3.1-3 with Condition SSB.2 FR1 for configuration 6.6.3.3-3, 6.6.3.3-6 Table H.3.1-3A Table H.3.1-4A Table H.3.1-5 with Condition INTER-RAT Table H.3.1-6 with Condition Pattern #0 Table H.3.1-7 with Condition INTER-RAT Table H.3.7-1 with Condition DRX.6 and Gap

6.6.3.3.5 Test requirement

Table 6.6.3.3.5-1 and Table 6.6.3.3.5-2 defines the primary level settings including test tolerances for all tests.

Table 6.6.3.3.5-1: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 2, 3	FDD	
			4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	

RMSI CORESET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORESET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	-98	
			3, 6	-95	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-106	
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-106	
			3, 6	-103	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	18	-2
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	18	-2
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	-88	-108
			3, 6	-85	-105
SSB_RP[Note3]		dBm/SCS	1, 2, 4, 5	-88	-108
			3, 6	-85	-105
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-59.98	-75.92
		dBm/38.16 MHz	3, 6	-53.88	-69.82
Propagation condition			1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.6.3.3.5-2: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-106	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	19
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	19
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-78.22+10log ($N_{RB,c}$ /50)	-59.16+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2, 3, 4, 5, 6	AWGN1944	
Antenna Configuration and Correlation Matrix [Note6]		1, 2, 3, 4, 5, 6	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 4.8s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.6.4 L1-RSRP measurement for beam reporting

6.6.4.0 Minimum conformance requirements

6.6.4.0.1 Minimum conformance requirements for SSB-based L1-RSRP measurement for beam reporting

Same as clause 4.6.4.0.1

The normative reference for this requirement is TS 38.133 [6] clause 9.5.3.1, 9.5.4.1 and 9.5.5.1.

6.6.4.0.2 Minimum conformance requirements for CSI-RS-based L1-RSRP measurement for beam reporting

Same as clause 4.6.4.0.2

The normative reference for this requirement is TS 38.133 [6] clauses 9.5.3.1, 9.5.4.2 and 9.5.5.2.

6.6.4.0.3 Inter-cell SSB based L1-RSRP Reporting

If a cell with PCI different from serving cell is known according 9.13.2 of TS 38.133, the UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$. The requirements specified in this clause are only applicable when

- *highSpeedMeasFlag-r16* is not configured, and
- *highSpeedMeasFlagFR2-r17* is not configured, and
- highSpeedMeasCA-Scell-r17 is not configured, and
- SSBs of CDP outside SMTCs for L1-RSRP measurement are not overlapped with concurrent gaps.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ is defined in Table 6.6.4.0.3-1 for FR1,

For FR1,

- $P=\frac{1}{1-\frac{T_{SSB_CDP}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 cell with PCI different from serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 cell with PCI different from serving cell, longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 6.6.4.0.3-1: Inter-cell L1-RSRP measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ for known cells with different PCIs in FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{SSB_CDP})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(K*M*P)*\max(T_{DRX},T_{SSB_CDP}))$

DRX cycle > 320ms	ceil(M*P)*T_{DRX}
Note 1:	T_{SSB_CDP} is the periodicity of the SSB-Index configured for inter-cell L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
Note 2:	K = 1.5.

6.6.4.1 NR SA FR1 SSB-based L1-RSRP measurement in non-DRX

6.6.4.1.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.1.

6.6.4.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

6.6.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.4.1.

6.6.4.1.4 Test description

6.6.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.4.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.4.1.4.1-2. Test environment parameters are given in Table 6.6.4.1.4.1-3.

Table 6.6.4.1.4.1-1: NR SA SSB based L1-RSRP measurement supported test configurations

Test Case ID	Description
6.6.4.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.4.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.4.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 6.6.4.1.4.1-2: General test parameters for NR SA SSB based L1-RSRP measurement

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1

	2		SSB.3 FR1
	3		SSB.4 FR1
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		Off
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 6.6.4.1.4.1-3: Test Environment parameters for NR SA SSB based L1-RSRP measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 6.6.4.1.4.3.

2. Single Cell is used, which is NR FR1 Pcell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3. The test parameters are given in tables 6.6.4.1.4.1-2 and 6.6.4.1.5-1. UE is configured to perform RLM and BFD based on the SSBs.

6.6.4.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.6.4.1.4.1-2. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.6.4.1.4.1-2.

2. Set the parameters according to T1 in Table 6.6.4.1.5-1. T1 starts.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 80 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 6.6.4.1.5-1. T2 starts.

5. The UE shall start sending valid L1-RSRP reports. The SS shall check following requirements:

   - R1: the UE shall start to transmit valid reports no later than 720 ms for configuration 1, 2 and no later than 680 ms for configuration 3 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 (Table 6.6.4.1.5-2 for test configurations 1, 2 and Table 6.6.4.1.5-3 for test configuration 3 and the relative L1-RSRP requirement for SSB#0 in Table 6.6.4.1.5-4. If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   - R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 6.6.4.1.5-2 for test configurations 1, 2 and in Table 6.6.4.1.5-3 for test configuration 3 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   -R4: The DIFF RSRP value of SSB#0 reported by the UE is compared to the expected DIFF RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 6.6.4.1.5-4 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.4.1.4.3-1: Common Exception messages NR SA SSB based L1-RSRP measurement

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10

Table 6.6.4.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

6.6.4.1.5 Test requirement

Table 6.6.4.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.4.1.5-1: SSB specific test parameters for NR SA SSB based L1-RSRP measurement

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~3	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.15
	3		-91.65	-91.65	-Infinity	-88.14
Io Note3	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.59
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1~3	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 4.6.4.1.5-2 for for test configuration 1, 2 and the corresponding absolute accuracy requirements in Table 4.6.4.1.5-3 for test configuration 3 and the corresponding relative accuracy requirements in Table 4.6.4.1.5-4 for all test configurations.

Table 6.6.4.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	55
Highest reported value (SSB#1)	-	75

Table 6.6.4.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 6.6.4.1.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.NOTE:
The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.4.2 NR SA FR1 SSB-based L1-RSRP measurement in DRX

6.6.4.2.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.1.

6.6.4.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR1 and long DRX cycle.

6.6.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.4.2.

6.6.4.2.4 Test description

6.6.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.4.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.4.2.4.1-2. Test environment parameters are given in Table 6.6.4.2.4.1-3.

Table 6.6.4.2.4.1-1: SA SSB based L1-RSRP measurement supported test configurations

Test Case ID	Description
6.6.4.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.4.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.4.2-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 6.6.4.2.4.1-2: General test parameters for NR SA SSB based L1-RSRP measurement

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		DRX.3
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 6.6.4.2.4.1-3: Test Environment parameters for NR SA SSB based L1-RSRP measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 6.6.4.2.4.3.
2. Single Cell is used, which is NR FR1 Pcell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3. The test parameters are given in tables 6.6.4.2.4.1-2 and 6.6.4.2.5-1. UE is configured to perform RLM and BFD based on the SSBs. DRX is configured as specified in Table 6.6.4.2.4.1-2.

6.6.4.2.4.2 Test procedure

Same test procedure as in subclause 6.6.4.1.4.2 with tables 6.6.4.1.4.1-2 and 6.6.4.1.5-1 replaced by tables 6.6.4.2.4.1-2 and 6.6.4.2.5-1.

6.6.4.2.4.3 Message contents

Same message content as in subclause 6.6.4.1.4.3 with the following exception:

Table 6.6.4.2.4.3-1: Common Exception messages EN-DC SSB based L1-RSRP measurement in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3

6.6.4.2.5 Test requirement

Table 6.6.4.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.4.2.5-1: SSB specific test parameters for NR SA SSB based L1-RSRP measurement

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~3	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.15
	3		-91.65	-91.65	-Infinity	-88.14
Io Note3	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.59
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s/N_{oc}$	1~3	dB	0	0	-Infinity	3.5
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.6.4.2.5-2 for for test configurations 1, 2 and the corresponding absolute accuracy requirements in Table 6.6.4.2.5-3 for test configuration 3 and the corresponding relative accuracy requirements in Table 6.6.4.2.5-4 for all test configurations.

Table 6.6.4.2.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	55
Highest reported value (SSB#1)	-	75

Table 6.6.4.2.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 6.6.4.2.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.4.3 NR SA FR1 CSI-RS-based L1-RSRP measurement in non-DRX

6.6.4.3.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.1.

6.6.4.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward.

6.6.4.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.4.3.

6.6.4.3.4 Test description

6.6.4.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.4.3.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.4.3.4.1-2. Test environment parameters are given in Table 6.6.4.3.4.1-3.

Table 6.6.4.3.4.1-1:NR SA CSI-RS based L1-RSRP measurement supported test configurations

Test Case ID	Description
6.6.4.3-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.4.3-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.4.3-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 6.6.4.3.4.1-2: General test parameters for NR SA CSI-RS based L1-RSRP measurement

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
DRX configuration	1~3		Off
reportConfigType	1~3		aperiodic
reportQuantity	1~3		cri-RSRP
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	8
T1	1~3	s	5

EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 6.6.4.3.4.1-3: Test Environment parameters for NR SA CSI-RS based L1-RSRP measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 6.6.4.3.4.3.

2. Single Cell is used, which is NR FR1 Pcell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3. The test parameters are given in tables 6.6.4.3.4.1-2 and 6.6.4.3.5-1. UE is configured to perform RLM and BFD based on the SSBs.

6.6.4.3.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. UE is also configured to measure L1-RSRP based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in table 6.6.4.3.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.4.3.5-1. T1 starts.

3. After 80ms from the start of the test the SS transmits the DCI trigger in slot 2 for configuration 1, slot 4 for configuration 2 and slot 8 for configuration 3. The corresponding CSI-RS set is transmitted with the offset of 0 slots after the DCI trigger.

4. The SS shall check following requirements:

   - R1: the UE shall send L1-RSRP report at slot 8 from the reception of DCI trigger. If the report is received at slot 8 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: The L1-RSRP value of CSI-RS#1 reported by the UE is compared to the expected L1-RSRP value for CSI-RS #1. If the resulting value is outside the limits in Table 6.6.4.3.5-2 for test configurations 1, 2 and in

Table 6.6.4.3.5-3 for test configuration 3 or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

-R3: The DIFF RSRP value of CSI-RS #0 reported by the UE is compared to the expected DIFF RSRP value. If the resulting value is outside the limits in Table 6.6.4.3.5-4 or the UE fails to report the measurement value for CSI-RS #0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

5. Void.

6. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

7. After the RRC connection release, the SS:

- transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
or:
- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.4.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.4.3.4.3-1: Common Exception messages NR SA CSI-RS-based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions APERIODIC and CSI-RSRP Table H.3.6-3 with conditions CSI-RS TS 38.508-1 [14] Table 7.3.1-21 with condition APERIODIC

Table 6.6.4.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

Table 6.6.4.3.4.3-3: Physical layer parameters for DCI format 1_1

Derivation Path: TS 38.508-1 [14], Table 7.2.2.1-1			
Parameter	**Value**	**Value in binary**	**Condition**

PDSCH-to-HARQ_feedback timing indicator	K1 = 3 if mod(i,10) = 8 where i is slot index per frame; i = {0,…,9}	-	Config1 (NR FDD)
PDSCH-to-HARQ_feedback timing indicator	K1 = 6 if mod(i,20) = 11 where i is slot index per frame; i = {0,…,19}	-	Config3 (NR TDD30kHz)

6.6.4.3.5 Test requirement

Table 6.6.4.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.4.3.5-1: SSB specific test parameters for NR SA CSI-RS based L1-RSRP measurement

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~3	dBm/15kHz	-94.65	
N_{oc} Note1	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~3	dB	0	3.5
CSI-RS RSRP Note2	1,2	dBm/SSB SCS	-94.65	-91.15
	3		-91.65	-88.14
Io Note2	1,2	dBm/9.36 MHz	-63.69	-61.59
	3	dBm/38.16 MHz	-57.59	-55.49
$\hat{E}_s / N_{oc}$	1~3	dB	0	3.5

Note 1: Void
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1.

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.6.4.3.5-2 for for test configurations 1, 2 and the corresponding absolute accuracy requirements in Table 6.6.4.3.5-3 for test configuration 3 and the corresponding relative accuracy requirements in Table 6.6.4.3.5-4 for all test configurations.

Table 6.6.4.3.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	55
Highest reported value (CSI-RS#1)	75

Table 6.6.4.3.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	58
Highest reported value (CSI-RS#1)	78

Table 6.6.4.3.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

	T1
Lowest DIFF RSRP reported (CSI-RS#0)	0
Highest DIFF RSRP reported (CSI-RS#0)	3

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.4.4 NR SA FR1 CSI-RS-based L1-RSRP measurement in DRX

6.6.4.4.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.1.

6.6.4.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR1 and long DRX cycle.

6.6.4.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.4.4.

6.6.4.4.4 Test description

6.6.4.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.4.4.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.4.4.4.1-2. Test environment parameters are given in Table 6.6.4.4.4.1-3.

Table 6.6.4.4.4.1-1: NR SA CSI-RS based L1-RSRP measurement supported test configurations

Test Case ID	Description
6.6.4.4-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.4.4-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.4.4-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 6.6.4.4.4.1-2: General test parameters for NR SA CSI-RS based L1-RSRP measurement

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD

RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
DRX configuration	1~3		DRX.3
reportConfigType	1~3		aperiodic
reportQuantity	1~3		cri-RSRP
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	8
T1	1~3	s	5
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 6.6.4.4.4.1-3: Test Environment parameters for NR SA CSI-RS based L1-RSRP measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 6.6.4.4.4.3.
2. Single Cell is used, which is NR FR1 Pcell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3. The test parameters are given in tables 6.6.4.4.4.1-2 and 6.6.4.4.5-1. UE is configured to perform RLM and BFD based on the SSBs.

6.6.4.4.4.2 Test procedure

Same test procedure as in subclause 6.6.4.3.4.2 with tables 6.6.4.3.4.1-2 and 6.6.4.3.5-1 replaced by tables 6.6.4.4.4.1-2 and 6.6.4.4.5-1.

6.6.4.4.4.3 Message contents

Same message content as in subclause 6.6.4.3.4.3 with the following exception:

Table 6.6.4.4.4.3-1: Common Exception messages NR SA CSI-RS-based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3 and Offset

6.6.4.4.5 Test requirement

Table 6.6.4.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.4.4.5-1: SSB specific test parameters for NR SA CSI-RS based L1-RSRP measurement

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~3	dBm/15kHz	-94.65	
N_{oc} Note1	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s/I_{ot}$	1~3	dB	0	3.5
CSI-RS RSRP Note2	1,2	dBm/SSB SCS	-94.65	-91.15
	3		-91.65	-88.14
Io Note2	1,2	dBm/9.36 MHz	-63.69	-61.59
	3	dBm/38.16 MHz	-57.59	-55.49
$\hat{E}_s/N_{oc}$	1~3	dB	0	3.5
Note 1: Void Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1.

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.6.4.4.5-2 for for test configurations 1, 2 and the corresponding absolute accuracy requirements in Table 6.6.4.4.5-3 for test configurations3 and the corresponding relative accuracy requirements in Table 6.6.4.4.5-4 for all test configurations.

Table 6.6.4.4.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	55
Highest reported value (CSI-RS#1)	75

Table 6.6.4.4.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	58
Highest reported value (CSI-RS#1)	78

Table 6.6.4.4.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

	T1
Lowest DIFF RSRP reported (CSI-RS#0)	0
Highest DIFF RSRP reported (CSI-RS#0)	3

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.4.5 NR SA FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The feasibility of configuring different channel models to different SSBs needs further study.

- The TT analysis may need to be redone after concluding if the new test configuration is testable.

6.6.4.5.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in DRX within L1-RSRP measurement requirements for UE configured with highSpeedMeasFlag-r16 in TS 38.133 clause 9.5.4.1

6.6.4.5.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR1, measurement enhancements in high speed scenario and long DRX cycle

6.6.4.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.4.5.

6.6.4.5.4 Test description

6.6.4.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.4.5.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.4.5.4.1-2. Test environment parameters are given in Table 6.6.4.5.4.1-3.

Table 6.6.4.5.4.1-1: SA SSB based L1-RSRP measurement supported test configurations for UE configured with highSpeedMeasFlag-r16

Test Case ID	Description
6.6.4.5-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.4.5-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.4.5-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 6.6.4.5.4.1-2: General test parameters for NR SA SSB based L1-RSRP measurement for UE configured with highSpeedMeasFlag-r16

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		DRX.3
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	2
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 6.6.4.5.4.1-3: Test Environment parameters for NR SA SSB based L1-RSRP measurement

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.

Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.4.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n=1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 with n=1 for TE Part		

1. Message contents are defined in clause 6.6.4.5.4.3.

2. Single Cell is used, which is NR FR1 Pcell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3. The test parameters are given in Table 6.6.4.5.4.1-2 and 6.6.4.5.5-1. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. DRX is configured as specified in Table 6.6.4.5.4.1-2.

6.6.4.5.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.6.4.5.4.1-2. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.6.4.1.4.1-2.

2. Set the parameters according to T1 in Table 6.6.4.1.5-1. T1 starts.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 80 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 6.6.4.1.5-1. T2 starts.

5. If the UE sends L1-RSRP reports meeting the corresponding absolute accuracy requirements in Table 6.6.4.5.5-2 for test configurations 1 and 2 the corresponding absolute accuracy requirements in Table 6.6.4.5.5-3 for test configurations 3 and the corresponding relative accuracy requirements in Table 6.6.4.5.5-4 for all test configurations every 80 slots from no later than 640 ms plus 80 slots for all configurations from the beginning of time period T2 until the end of time period T2, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.4.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.4.5.4.3-1: Common Exception messages NR SA SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-3 with Condition HighSpeedMeas
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with conditions SSB Table H.3.6-10 Table H.3.7-1 with condition DRX.3

Table 6.6.4.5.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

6.6.4.5.5 Test requirement

Table 6.6.4.5.5-1: SSB specific test parameters for UE configured with *highSpeedMeasFlag-r16*

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.6			
N_{oc} Note2	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~3	dB	0	0	-Infinity	3.53
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.15
	3		-91.65	-91.65	-Infinity	-88.14
Io Note3	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.59
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1~3	dB	0	0	-Infinity	3.5
Propagation conditions	1,2		AWGN		AWGN 1944 Hz Note4	
	3		AWGN		AWGN 3334 Hz Note5	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: The AWGN 1944 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.

Note 5:	The AWGN 3334 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 3334 Hz.

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 6.6.4.5.5-2 for for test configurations 1 and 2 and the corresponding absolute accuracy requirements in Table 6.6.4.5.5-3 for test configurations 3 and the corresponding relative accuracy requirements in Table 6.6.4.5.5-4 for all test configurations.

Table 6.6.4.5.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	55
Highest reported value (SSB#1)	-	75

Table 6.6.4.5.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 6.6.4.5.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.4.6 NR SA FR1 Inter-cell SSB based L1-RSRP measurements on PCell in DRX

6.6.4.6.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in DRX within L1-RSRP measurement requirements for SSB of a cell with additional PCI.

6.6.4.6.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting 5GS NR SA FR1, measurement Inter-cell SSB based L1-RSRP measurements on PCell in DRX.

6.6.4.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.4.6.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.4.6.

6.6.4.6.4 Test description

6.6.4.6.4.1 Initial conditions

This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1 of TS 38.133 [6] , with the testing configurations for NR cells in Table 6.6.4.6.1-1.

Table 6.6.4.6.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 6.6.4.6.2-1: General test parameters

Parameter	Config	Unit	Value
Active cell	1~3		Cell 1
A cell with additional PCI	1~3		Cell 2
RF Channel Number	1~3		1: Cell 1 and Cell 2
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1 for Cell1 and Cell2
	2		SSB.3 FR1 for Cell1 and Cell2
	3		SSB.4 FR1 for Cell1 and Cell2
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		DRX.3
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
CP length	1~3		Normal
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Time offset between serving and a cell with additional PCI	1		< CP
	2		< CP
	3		< CP
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 6.6.4.6.2-2: Test Environment parameters for NR SA SSB based L1-RSRP measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.4.6.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 6.6.4.6.4.3.

2. There are two cells in the test, the FR1 PCell (Cell 1) and a cell with additional PCI (Cell 2). The connection setup is done according to the settings in Annex C.1.2 and C.1.3. The test parameters are given in tables 6.6.4.6.4.1-2 and 6.6.4.6.5-1. UE is configured to perform RLM and BFD based on the SSBs.

6.6.4.6.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.6.4.6.4.1-2. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.6.4.6.4.1-2.

2. Set the parameters according to T1 in Table 6.6.4.6.5-1. T1 starts.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 80 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 6.6.4.6.5-1. T2 starts.

5. The UE shall start sending valid L1-RSRP reports. The SS shall check following requirements:

   - R1: the UE shall start to transmit valid reports no later than 720 ms for configuration 1, 2 and no later than 680 ms for configuration 3 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 (Table 6.6.4.6.5-2 for test configurations 1, 2 and Table 6.6.4.6.5-3 for test configuration 3 and the relative L1-RSRP requirement for SSB#0 in Table 6.6.4.6.5-4. If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

- R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

- R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 6.6.4.6.5-2 for test configurations 1, 2 and in Table 6.6.4.6.5-3 for test configuration 3 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

- R4: The DIFF RSRP value of SSB#0 reported by the UE is compared to the expected DIFF RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 6.6.4.6.5-4 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.4.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.4.6.4.3-1: Common Exception messages NR SA SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10

Table 6.6.4.6.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

Table 6.6.4.6.4.3-3: CSI-SSB-ResourceSetConfig

Derivation Path: TS 38.133 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-SSB-ResourceSet ::= SEQUENCE {			
csi-SSB-ResourceSetId	0		
csi-SSB-ResourceList	0		
servingAdditionalPCIList-r17	1		
}			

6.6.4.6.5 Test requirement

Table 6.6.4.6.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.4.6.5-1: SSB specific test parameters for NR SA SSB based L1-RSRP measurement

Parameter	Config	Unit	SSB#0 of Cell 1		SSB#1 of Cell 2	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~3	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
Io Note3	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	0	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send L1-RSRP report every 80 slots. No later than X ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of SSB#1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2, where X is

- 680 for Config 1&2
- 660 for Config 3

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.5 UTRAN inter-RAT measurement

6.6.5.1 NR SA FR1 – UTRAN event-triggered reporting in non-DRX

6.6.5.1.1 Test purpose

This test is to verify that the UE makes correct event-triggered reporting of inter-RAT UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 under the cell search and measurement requirements.

6.6.5.1.2 Test applicability

This test applies to all types of NR UE supporting SA FR1 from Release 16 onwards and support UTRA FDD.

6.6.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.5.1.

6.6.5.1.4 Test description

6.6.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.5.1.4.1-1.

Table 6.6.5.1.4.1-1: supported test configurations

Test Case ID	Description
6.6.5.1-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode, UTRAN FDD
6.6.5.1-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode, UTRAN FDD
6.6.5.1-3	NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode, UTRAN FDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.6.5.1.4.1-2 and Table 6.6.5.1.4.1-3.

Table 6.6.5.1.4.1-2: Initial conditions for SA inter-RAT UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-3 and TS 38.508-1 [14] sclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.5.1.5-1 and Table 6.6.5.1.5-2.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	UE Part	A.3.2.3.2	
Exceptions to connection diagram	SS LTE in Figure A.3.1.8.2 is replaced by SS UTRA LTE TX/RX in Figure A.3.2.3.2 is replaced by UTRA TX/RX		

Table 6.6.5.1.4.1-3: General test parameters for SA inter-RAT UTRAN FDD event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
UTRA RF Channel Number		2	1 UTRA carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Table 6.6.5.1.5-1 and Table 6.6.5.1.5-2	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in Clause Table FFS Per-UE gap pattern.
Inter-RAT UTRA measurement quantity		CPICH Ec/Io	Measurement quantity for Cell 2
b1-ThresholdUTRA-FDD	dB	-16.5	CPICH Ec/Io threshold for SS-RSRP measurement on cell1 for event B1
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF

T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.6.6.5.1.1-3			

1. Message contents are defined in clause 6.6.5.1.4.3.

2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT UTRAN inter-RAT neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 Annex C.0 and C.1.

6.6.5.1.4.2 Test procedure

The test consists of two successive time periods, with time durations of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2. Gap pattern configuration is configured before T2 begins to enable inter-frequency monitoring.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.5.1.5-1 and 6.6.5.1.5-2. Propagation conditions are set according to Annex C clause C.2.2.T1 starts.

3. SS shall transmit an *RRCReconfiguration* message to confogure Event B1 measurement reporting.

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.5.1.5-1 and 6.6.5.1.5-2.

6. UE shall transmit a *MeasurementReport* message triggered by Event B1. If the measurement reporting delay from the beginning of time period T2 is less than 3842ms the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 primary scrambling code = ((current cell 2 primary scrambling code - 50) mod 200 + 100) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED according to TS 38.508-1 [14] clause 4.5.4 (if the paging fails, switches off and on the UE and ensures the UE is in the state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5,
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.5.1.4.3 Message contents

Table 6.6.5.1.4.3-1: RRCReconfiguration (Step 3)

Derivation Path: TS 38.508-1 [14] Table 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			

criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 6.6.5.1.4.3-2	
}			
}			
}			

Table 6.6.5.1.4.3-2: MeasConfig (Table 6.6.5.1.4.3-1)

Derivation Path: Table H.3.1-2 with condition INTER-RAT and GAP NEEDED			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod {	2 entries		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT specified in Table H.3.1-3 with condition INTRA-FREQ MO		
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		entry 2	
measObjectId	2		
measObject CHOICE {			
measObjectUTRA-FDD-r16	MeasObjectUTRA-FDD	Table 6.6.5.1.4.3-3	
}			
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigInterRAT	ReportConfigInterRAT(*16*) specified in 38.508-1 [14] Table 4.6.3-141 with condition EVENT_B1_UTRA	Actual value of UTRA threshold = (16-49)/2 = -16.5dB	
}			
}			
}			
measGapConfig	MeasGapConfig specified in Table H.3.1-6 with condition gapUE and Pattern #0		
}			

Table 6.6.5.1.4.3-3: MeasObjectUTRA-FDD (Table 6.6.5.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-77A			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectUTRA-FDD-r16 ::= SEQUENCE {			
carrierFreq-r16	ARFCN-ValueUTRA-FDD-r16 for UTRA Cell 2		
}			

Table 6.6.5.1.4.3-4: MeasurementReport (Step 6)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-5A			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasurementReport ::= SEQUENCE {			
criticalExtensions CHOICE {			
measurementReport SEQUENCE {			
measResults	MeasResults	Table 6.6.5.1.4.3-5	
}			
}			
}			

Table 6.6.5.1.4.3-5: MeasResults (Table 6.6.5.1.4.3-4)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-79 with condition B1_UTRA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measResultNeighCells CHOICE {			
measResultListUTRA-FDD-r16 SEQUENCE (SIZE (1..maxCellReport)) OF MeasResultUTRA-FDD-r16 {	1 entry		
MeasResultUTRA-FDD-r16[1] SEQUENCE {		entry 1	
physCellId-r16	PhysCellIdUTRA-FDD-r16 of UTRA Cell 2		
measResult-r16 SEQUENCE {			
utra-FDD-EcN0-r16	INTEGER (0..49)		
}			
}			
}			
}			
}			

6.6.5.1.5 Test requirement

Table 6.6.5.1.5-1 and Table 6.6.5.1.5-2 define the primary level settings including test tolerances for all tests.

Table 6.6.5.1.5-1: PCell specific test parameters for SA inter-RAT UTRA FDD event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3	1	
Duplex mode			1, 2, 3	FDD	
TDD Configuration	SCS=15 KHz		2	TDDConf.1.1	
	SCS=30 KHz		3	TDDConf.1.2	
$BW_{channel}$		MHz	1	10: $N_{RB,c}$ = 52 (FDD)	
			2	10: $N_{RB,c}$ = 52 (TDD)	
			3	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1	SR.1.1 FDD	
			2	SR.1.1 TDD	
			3	SR.2.1 TDD	
CORSET reference channel			1	CR.1.1 FDD	
			2	CR.1.1 TDD	
			3	CR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3	DLBWP.1.1	
	Initial UL BWP		1, 2, 3	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3	OP.1	

SMTC configuration		1, 2, 3	SMTC.1	
SSB configuration		1, 2	SSB.1 FR1	
		3	SSB.2 FR1	
CSI-RS for tracking		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}Note2	dBm/15 KHz	1, 2, 3	-106	
N_{oc}Note2	dBm/SCS	1, 2	-106	
		3	-103	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	18	-2
$\hat{E}_s/I_{ot}$Note3	dB	1, 2, 3	18	-2
SS-RSRPNote3	dBm/SCS	1, 2	-88	-108
		3	-85	-105
SSB_RPNote3	dBm/SCS	1, 2	-88	-108
		3	-85	-105
IoNote3	dBm/9.36 MHz	1, 2	-59.98	-75.92
	dBm/38.16 MHz	3	-53.88	-69.82
Propagation condition		1, 2, 3	ETDLA30	
Antenna Configuration and Correlation Matrix		1, 2, 3	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.6.5.1.5-2: UTRAN neighbour cell specific test parameters for SA inter-RAT UTRAN FDD event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Cell 2	
		T1	T2
UTRA RF Channel Number		2	
CPICH_Ec/Ior	dB	-10	
PCCPCH_Ec/Ior	dB	-12	
SCH_Ec/Ior	dB	-12	
PICH_Ec/Ior	dB	-15	
DPCH_Ec/Ior	dB	N/A	
OCNS		-0.941	
$\hat{I}_{or}/I_{oc}$	dB	-Infinity	-1.8
I_{oc}	dBm/3.84 MHz	-70	
CPICH_Ec/Io	dB	-Infinity	-14
Propagation Condition		AWGN	

Note 1: The DPCH level is controlled by the power control loop.

Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or}.

The UE shall send one Event B1 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 2.4s from the start of period T2, i.e. when Cell 2 becomes detectable. The measurement reporting delay

is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

6.6.6 CLI Measurements

6.6.6.0 Minimum conformance requirements

6.6.6.0.1 Minimum conformance requirements for SRS-RSRP measurement

Same as in clause 4.6.5.0.1.

6.6.6.0.2 Minimum conformance requirements for CLI-RSSI measurement with non-DRX

Same as in clause 4.6.5.0.2.

6.6.6.1 NR SA FR1 SRS-RSRP measurement in non-DRX

6.6.6.1.1 Test purpose

To verify that the UE makes correct reporting of SRS-RSRP measurement. This test will verify the SRS-RSRP measurement requirements in clause 6.6.6.0.

6.6.6.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR and CLI-based SRS-RSRP measurements.

6.6.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.6.1.

6.6.6.1.4 Test description

The test scenario comprises of one serving NR FR1 PCell (Cell 1) and one virtual intra-frequency UE transmitting SRS periodically, which are the target of the CLI measurement report evaluated in the test. The test parameters for PCell are given in Table 6.6.6.1.4.1-3 and Table 6.6.6.1.5-1 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with event I1 is used. No gap pattern is configured in the test.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table 6.6.6.1.5-3 and the test parameters for the (virtual) neighbour cell UE in Table 6.6.6.1.5-2. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

6.6.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.6.1.4.1-1.

Table 6.6.6.1.4.1-1: Supported test configurations for NR SA FR1 SRS-RSRP measurement in non-DRX

Configuration	Description
6.6.6.1-1	NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
6.6.6.1-2	NR 30 kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.6.6.1.4.1-2.

Table 6.6.6.1.4.1-2: Initial conditions for NR SA FR1 SRS-RSRP measurement in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.6.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 6.6.6.1.4.3.

2. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Virtual UE 1 is the target for SRS-RSRP measurements.

3. The test parameters are given in Table 6.6.6.1.4.1-3.

Table 6.6.6.1.4.1-3: General test parameters for NR SA FR1 SRS-RSRP measurement in non-DRX

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
RF Channel Number		1, 2	1: Cell 1	
SSB configuration		1	SSB.1 FR1	
		2	SSB.2 FR1	
SMTC configuration		1	SMTC.1	
		2	SMTC.1	
SRS configuration		1	SRSConf.1	Table 6.6.6.1.5-3
		2	SRSConf.2	
CP length		1, 2	Normal	
i1-Threshold	dBm	1	-97	
		2	-95	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	DRX.7	
Time offset between DL from serving cell and SRS from test system	µs	1,2	17.67	
T1	s	1, 2	5	
T2	s	1, 2	5	

6.6.6.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2, respectively. During T1 only the serving NR PCell is powered on, but at the start of T2 the virtual UE is powered on and starts transmitting on SRS resources, in addition to the serving NR cell which is kept powered on. The purpose of the test is to evaluate the event i1 reporting delay upon a newly powered up virtual UE, from the start of T2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.6.1.4.1-3, Table 6.6.6.1.5-1 and Table 6.6.6.1.5-2.

3. The SS shall transmit an *RRCReconfiguration* message configuring a CLI measurement object with a CLI event I1 trigger, as specified in section 6.6.6.1.4.3.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.6.1.4.1-3, Table 6.6.6.1.5-1 and Table 6.6.6.1.5-2. T2 Starts.

6. UE shall transmit a *MeasurementReport* message triggered by event I1, as specified in section 6.6.6.1.4.3. If the overall delay measured from the beginning of time period T2 is less than 1922 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall requirement delay, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall power off the virtual UE and then transmit an *RRCRelease* message to release the RRC connection.

8. The SS shall:

   - switch off and then on the UE and go to step 9, or

   - transmit *Paging* message (including *PagingRecord* with *ue-Identity*) for the UE and go to step 9.

9. Repeat steps 1-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 6.6.6.1.4.3-1: Common Exception messages for NR SA FR1 SRS-RSRP measurement in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5

Table 6.6.6.1.4.3-2: *MeasObjectToAddModList* for NR SA FR1 SRS-RSRP measurement in non-DRX

Derivation Path: TS 38.508-1 [14], Table 4.6.3-77 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectToAddModList::= SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod {	1 entry		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectCLI-r16	MeasObjectCLI-r16		
}			
}			
}			

Table 6.6.6.1.4.3-3: *MeasObjectCLI-r16* for NR SA FR1 SRS-RSRP measurement in non-DRX

Derivation Path: TS 38.508-1 [14], Table 4.6.3-76 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectCLI-r16 ::= SEQUENCE {			
cli-ResourceConfig-r16 SEQUENCE {			
srs-ResourceConfig-r16 CHOICE {			
setup SEQUENCE {			
SRS-ResourceListConfigCLI-r16 SEQUENCE {	1 entry		
srs-Resource-r16	SRSConf.1	entry 1	Config 1
	SRSConf.2	entry 1	Config 2
srs-SCS-r16	kHz15		Config 1
	kHz30		Config 2
refServCellIndex-r16	0	PCell	
refBWP-r16	0	BWP-0	
}			
}			

}			
}			
}			

Table 6.6.6.1.4.3-4: *ReportConfigNR* for NR SA FR1 SRS-RSRP measurement in non-DRX

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
cli-EventTriggered-r16 SEQUENCE {			
eventId-r16 CHOICE {			
eventI1-r16 SEQUENCE {		Event I1	
i1-Threshold CHOICE {			
srs-RSRP-r16	43	43 = -97-(-140)	Config 1
srs-RSRP-r16	45	45 = -95-(-140)	Config 2
}			
reportOnLeave-r16	False		
hysteresis-16	0		
timeToTrigger-r16	ms0		
}			
}			
reportInterval-r16	ms120	Not critical to the test	
reportAmount-r16	r2	Similar to other measurement tests	
maxReportCLI-r16	1		
}			
}			
}			

Table 6.6.6.1.4.3-5: *MeasResultCLI-r16* for NR SA FR1 SRS-RSRP measurement in non-DRX

Derivation Path: TS 38.508-1 [14], Table 4.6.3-79 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultCLI-r16 ::= SEQUENCE {			
measResultsListSRS-r16 CHOICE {			
srs-ResourceId-r16	SRS-ResourceId		
srs-RSRP-Result-r16	SRS-RSRP-Range-r16	INTEGER (0..98)	
}			
}			

6.6.6.1.5 Test requirement

Table 6.6.6.1.5-1 and Table 6.6.6.1.5-2 define the primary level settings including test tolerances for NR SA FR1 SRS-RSRP measurement in non-DRX. Table 6.6.6.1.5-3 defines the SRS resource configurations.

Table 6.6.6.1.5-1: NR Cell specific test parameters for NR SA FR1 SRS-RSRP measurement in non-DRX

Parameter	**Unit**	**Test configuration**	**Cell 1**	
			T1	**T2**
TDD configuration		1	TDDConf.1.1	
		2	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 TDD	
		2	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 TDD	
		2	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 TDD	
		2	CCR.2.1 TDD	

OCNG Patterns		1, 2	OP.1
TRS Configuration		1	TRS.1.1 TDD
		2	TRS.1.2 TDD
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1
Active DL BWP configuration		1, 2	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.1
N_{oc} Note 2	dBm/15 kHz	1	-98
		2	
N_{oc} Note 2	dBm/SCS	1	-98
		2	-95
Propagation Condition		1, 2	AWGN

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 6.6.6.1.5-2: Neighbour UE specific test parameters for NR SA FR1 SRS-RSRP measurement in non-DRX

Parameter	Unit	Test configuration	Neighbour cell UE	
			T1	T2
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-95	
$\hat{E}_s/I_{ot}$	dB	1	-infinity	9.25 8.75
		2		
$\hat{E}_s/N_{oc}$	dB	1	-infinity	9.25 8.75
		2		
SRS-RSRP Note 3	dBm/SCS kHz	1	-infinity	-88.75
		2	-infinity	-86.25
Io	dBm/9.36 MHz	1	-70.05	-60.62
	dBm/38.16 MHz	2	-63.96	-57.51
Propagation Condition		1, 2	AWGN	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.6.6.1.5-3: SRS configuration**s for NR SA FR1 SRS-RSRP measurement in non-DRX**

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	

	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	12	12	
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset	sl640, 4	sl640, 9	
	sequenceId	0	0	Any 10 bit number

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 1920 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.7 NR measurements with autonomous gaps

6.6.7.0 Minimum conformance requirements

6.6.7.0.1 Minimum conformance requirements for SA intra-frequency CGI identification of NR neighbour cell in FR1

[TS38.133, Clause 9.11]

6.6.7.0.1.1 Introduction

The requirements in this clause are applicable for CGI identification of an intra frequency and inter frequency NR target cell.

The requirements in this clause are specified for CGI identification of an NR target cell and are applicable for a UE:

- in RRC_CONNECTED state, and
- configured with SA or NR-DC or NE-DC operation mode, or with EN-DC operation mode for CGI identification requested by NR PSCell.

The overall CGI reporting delay is defined in clause 6.6.7.0.1.3.

The measurement reporting delay can be longer for the measurement reporting requirements in this clause when IDC autonomous denial is configured.

6.6.7.0.1.2 CGI identification of an NR cell with autonomous gaps

The UE shall identify and report the CGI of a known NR target cell when requested by the network for the purpose of reportCGI. Only one cell is provided to the UE with *cellForWhichToReportCGI* for identifying the CGI. The UE may make autonomous gaps in both downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3 in TS 38.331 [13]. Note that a UE is not required to use autonomous gap if *useAutonomousGaps* is set to false. If autonomous gaps are used for measurement with the purpose of reportCGI,

regardless of whether DRX is used or not, or whether SCell(s) are configured or not, the UE shall be able to identify a new CGI of NR cell within:

$T_{identify_CGI} = (T_{MIB} + T_{SIB1})$ ms

Where:

T_{MIB} is the time period used to acquire MIB message. $T_{MIB} = 6 * T_{SMTC}$ ms for target cell carrier frequency on FR1 and $T_{MIB} = 25 * T_{SMTC}$ ms for target cell carrier frequency on FR2.

T_{SIB1} is the time period used to acquire SIB1 message. $T_{SIB1} = 6 * T_{RMSI\text{-}scheduling}$ ms.

Where T_{SMTC} is the SMTC periodicity configured for the target cell measurement, and $T_{RMSI\text{-}scheduling}$ is

- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and 20ms when SSB and RMSI CORESET multiplexing pattern is 1
- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and T_{SMTC} when SSB and RMSI CORESET multiplexing pattern is 2 or 3.

The requirement for identifying the CGI of an NR cell within $T_{identify_CGI}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [13] is used.

Within the time $T_{identify_CGI}$, over which the UE identifies the CGI of an NR cell, the UE shall fulfil interruption requirements specified in,

- Clause 8.2.1.2.16 in TS 38.133 [6] for NR serving cells and Clause 7.32.2.15 in TS 36.133 [29] for E-UTRA serving cells if the UE is configured with EN-DC operation mode,
- Clause 8.2.2.2.14 in TS 38.133 [6] if the UE is configured with SA operation mode,
- Clause 8.2.3.2.14 in TS 38.133 [6] for NR serving cells and Clause 7.36.2.14 in TS 36.133 [29] for E-UTRA serving cells if the UE is configured with NE-DC operation mode,
- Clause 8.2.4.2.11 in TS 38.133 [6] if the UE is configured with NR-DC operation mode.

In the requirement a cell is known if,

- During the last 5 seconds for FR1 or 3 seconds for FR2 before the reception of the report CGI command:
  - The UE has sent a valid L3-RSRP measurement report with SSB index for the target cell and
- During MIB decoding at least reported SSBs remains detectable according to the cell identification conditions specified in clauses 9.2 or 9.3 in TS 38.133 [6], and
- During SIB1 decoding the SSB used for MIB decoding remains detectable according to the cell identification conditions specified in clauses 9.2 or 9.3 in TS 38.133 [6], and
- During MIB decoding, the SSB for MIB decoding remains detectable with SNR $\geqslant$-3dB
- During SIB1 decoding, the PDSCH for SIB1 decoding remains detectable with SNR $\geqslant$-3dB

6.6.7.0.1.3 CGI reporting delay

The CGI reporting delay is defined as the time between a command that will trigger a CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI}$ defined in clause 6.6.7.0.1.2 plus RRC procedure delay defined in clause 12 in TS 38.331 [13], and additional 20ms margin if target cell is on FR2.

6.6.7.0.2 Minimum conformance requirements for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA

[TS 38.133, Clause 9.4.7]

6.6.7.0.2.1 CGI identification of an E-UTRA cell with autonomous gaps

The requirements in this clause apply when the UE is configured with standalone NR, NE-DC or NR-DC. The UE shall identify and report the CGI when requested by an NR PCell for the purpose 'reportCGI'. The UE may make autonomous gaps in downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3.1 in TS 38.331 [13]. If autonomous gaps are used for measurement with the purpose of 'reportCGI', regardless of whether DRX is used or not, or regardless of whether SCell(s) are configured or not, the UE shall be able to identify a new CGI of E-UTRA cell within $T_{identify_CGI,\ E\text{-}UTRAN}$ = 150 ms. This is the maximum allowed time for the UE to identify a new CGI of an E-UTRA cell, provided that the E-UTRA cell has been already identified by the UE.

A cell shall be considered identifiable following conditions are fulfilled:

- RSRP related side conditions given in Clause 9.1 in TS 36.133 [29] are fulfilled for a corresponding band,
- SCH_RP and SCH Ês/Iot according to Annex B.2.2 in TS 36.133 [29] for a corresponding band

The MIB of an E-UTRA cell whose CGI is identified shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to TS 36.101 [27].

The requirement for identifying a new CGI of an E-UTRA cell within $T_{identify_CGI,\ E\text{-}UTRAN}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [13] is used.

6.6.7.0.2.2 CGI reporting delay

The E-UTRA CGI reporting delay is defined as the time between a command that will trigger an E-UTRA CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI,\ E\text{-}UTRAN}$ plus RRC procedure delay defined in clause 12 in TS 38.331 [13], and an additional 30ms margin.

6.6.7.1 SA intra-frequency CGI identification of NR neighbour cell in FR1

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing
- TT analysis is missing

6.6.7.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of intra-frequency CGI identification of an NR neighbour cell in FR1 with autonomous gaps. This test shall partly verify the measurement requirements in Clause 9.11 in TS 38.133 [6].

6.6.7.1.2 Test applicability

This test applies to all types of NR SA UE Rel-16 and forward supporting with PCell in FR1 and supporting acquisition of CGI from neighbour NR cell using autonomous gap, which is controlled by PICS pc_nr_CGI_Reporting.

6.6.7.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.6.7.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.7.1.

6.6.7.1.4 Test description

The test scenario comprises of one NR FR1 carrier. Two cells are deployed in the test, which are NR FR1 PCell (Cell 1) and NR FR1 neighbour cell (Cell 2) on NR RF channel 1.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report.

6.6.7.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.7.1.4.1-1.

Table 6.6.7.1.4.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.7.1.4.1-2.

Table 6.6.7.1.4.1-2: Initial conditions for EN-DC PSCell FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.7.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.2.3.1	
Exceptions to connection diagram	N/A		

1. The test parameters for NR Cells are given in Table 6.6.7.1.4.1-3 below. The test parameters and applicability for the E-UTRAN PCell are defined in Table A.3.7.2.1-1 in TS 38.133 [6]. Cell-specific parameters of NR PSCell are specified in Table 6.6.7.1.5-1.

2. Message contents are defined in clause 6.6.7.1.4.3.

3. There are one E-UTRAN cell and two NR cells specified in the test. E-UTRAN Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 6.6.7.1.4.1-3: General test parameters for SA intra-frequency CGI identification of NR neighbour cell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	

Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 µs	Synchronous cells
		3	3 µs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

6.6.7.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR SA*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4. UE is connected to Cell 1 (PCell) on NR RF channel 1. NR Cell 2 is also on NR RF channel 1. Set the parameters according to Tables 6.6.7.1.4.1-3 and 6.6.7.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

2. The SS starts sending PDCCHs indicating new transmissions continuously on Cell 1.

3. T1 starts. At this moment, the UE does not have any timing information of Cell 2.

4. After 5 seconds, T2 starts. A measurement object is configured for the frequency of the PCell and it is indicated to the UE that event-triggered reporting with Event A3 is used. The UE is expected to detect and send a measurement report with Event A3. A new RRC message triggering CGI identification shall be sent to the UE during period T2, after the UE has reported Event A3. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to TRUE.

5. After 5 seconds, T3 starts. The start of T3 is the instant when the last TTI containing the RRC message implying CGI identification is sent to the UE.

6. If the UE transmits a measurement report containing the cell global identifier of Cell 2 within 252 ms from the start of T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. If it is successful, continue to step 9. Otherwise continue to step 8.

8. Switch the UE OFF and then ON. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR SA*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.7.1.4.3 Message contents

TBD

6.6.7.1.5 Test requirement

Table 6.6.7.1.5-1 defines the cell specific test parameters, not including test tolerances yet.

Editor's note: will be updated after TT analysis

Table 6.6.7.1.5-1: NR Cell specific test parameters for SA intra-frequency CGI identification of NR neighbour cell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
		1	CR.1.1 FDD		CR.1.1 FDD	

RMSI CORESET RMC configuration		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98 + TT			
		2	-98 + TT			
		3	-95 + TT			
N_{oc} Note 2	dBm/15 kHz	1	-98 + TT			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4 + TT	-1.46 + TT	-Infinity	-1.46 + TT
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4 + TT	4 + TT	-Infinity	4 + TT
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94 + TT	-94 + TT	-Infinity	-94 + TT
		2	-94 + TT	-94 + TT	-Infinity	-94 + TT
		3	-91 + TT	-91 + TT	-Infinity	-91 + TT
Io	dBm/9.36 MHz	1	-64.60 + TT	-62.25 + TT	--64.60 + TT	-62.25 + TT
	dBm/9.36 MHz	2	-64.60 + TT	-62.25 + TT	--64.60 + TT	-62.25 + TT
	dBm/38.16 MHz	3	-58.50 + TT	-56.16 + TT	--58.50 + TT	-56.16 + TT
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send a measurement report containing the CGI of cell 2 within 252 ms from the start of time period T3.

Test requirement = RRC Procedure delay + $T_{identify_CGI}$ + reporting delay

= 10 + 240 + 2ms from the start of T3

= 252 ms

The UE shall be scheduled continuously throughout the test. From the start of T3 until 252 ms, the interruption on PCell shall not be more than the values specified for SA in clause 8.2.2.2.14 in TS 38.133 [6].

The rate of correct events observed during repeated tests shall be at least 90%.

6.6.7.2 Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing
- TT analysis is missing

6.6.7.2.1 Test purpose

This test is to verify the requirement for identification of a new CGI of E-UTRA cell with autonomous gaps in NR SA in clause 9.4.7 in TS 38.133 [6].

6.6.7.2.2 Test applicability

This test applies to all types of NR SA UE Rel-16 and forward supporting with PCell in FR1 and supporting acquisition of CGI from neighbour E-UTRA cell using autonomous gap, which is controlled by PICS pc_eutra_CGI_Reporting.

6.6.7.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.6.7.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.7.2.

6.6.7.2.4 Test description

The test scenario comprises of one NR FR1 carrier and one E-UTRA carrier. Two cells are deployed in the test, which are NR FR1 PCell (Cell 1) and E-UTRA neighbour cell (Cell 2).

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report.

6.6.7.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.7.2.4.1-1.

Table 6.6.7.2.4.1-1: Supported test configurations of inter-RAT E-UTRAN cell using autonomous gap in SA

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.6.7.2.4.1-2.

Table 6.6.7.2.4.1-2: Initial conditions for EN-DC PSCell FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.7.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.1.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.2.3.1	
Exceptions to connection diagram	N/A		

1. The general test parameters are given in Table 6.6.7.2.4.1-3 below. Cell-specific parameters of NR and E-UTRA are specified in Table 6.6.7.2.5-1, and 6.6.7.2.5-2, respectively.

2. Message contents are defined in clause 6.6.7.2.4.3.

3. There are one NR cell and one E-UTRAN cell specified in the test. NR Cell is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 6.6.7.2.4.1-3: General test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
LTE Channel Bandwidth	MHz	10	
LTE PDSCH/PCFICH/PDCCH/PHICH parameters			As specified in clause A.3.7.2.1 in TS 38.133
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
useAutonomousGaps		TRUE	As specified in clause 5.5.3.1 in TS 38.331.
Time offset between cells	ms	3	Asynchronous cells
T1	s	5	
T2	s	≤10	
T3	s	5	

6.6.7.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR SA*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4. UE is connected to Cell 1 (PCell) on NR RF channel 1. E-UTRA Cell 2 is also on RF channel 1. Set the parameters according to Tables 6.6.7.2.4.1-3 and 6.6.7.2.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

2. The SS starts sending PDCCHs indicating new transmissions continuously on Cell 1.

3. T1 starts. At this moment, the UE does not have any timing information of Cell 2.

4. After 5 seconds, T2 starts. A RRC message implying SI reading shall be sent to the UE during period T2, after the UE has reported Event B2. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to TRUE.

5. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading is sent to the UE.

6. If the UE transmits a measurement report containing the cell global identifier of Cell 2 within 200 ms from the start of T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. If it is successful, continue to step 9. Otherwise continue to step 8.

8. Switch the UE OFF and then ON. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR SA*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.7.2.4.3 Message contents

TBD

6.6.7.2.5 Test requirement

Table 6.6.7.2.5-1 and 6.6.7.2.5-2 define the cell specific test parameters, not including test tolerances yet.

Editor's note: will update after TT analysis.

Table 6.6.7.2.5-1: PCell specific test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6	1		
Duplex mode			1, 2, 3	FDD		
			4, 5, 6	TDD		
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1		
	SCS=30 KHz		3, 6	TDDConf.2.1		
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)		
			2, 5	10: $N_{RB,c}$ = 52 (TDD)		
			3, 6	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1		
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1		
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1		
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		
b2-Threshold1		dBm	1, 2, 4, 5	-98		
			3, 6	-95		
b2-Threshold2EUTRA		dBm/15kHz	1, 2, 3, 4, 5, 6	-109		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-106		
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-106		
			3, 6	-103		
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	18	-2	
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	18	-2	
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	-88	-108	
			3, 6	-85	-105	
SSB_RP[Note3]		dBm/SCS	1, 2, 4, 5	-88	-108	
			3, 6	-85	-105	
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-59.98	-75.92	
		dBm/38.16 MHz	3, 6	-53.88	-69.82	
Propagation condition			1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.6.7.2.5-2: Cell specific test parameters for inter-RAT E-UTRAN cell for identification of a new CGI of E-UTRA cell using autonomous gaps

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration[Note1]		4, 5, 6	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	10 MHz: $N_{RB,c}$ = 50		
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	10 MHz: R.3 FDD		
		4, 5, 6	10 MHz: R.0 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	10 MHz: R.6 FDD		
		4, 5, 6	10 MHz: R.6 TDD		
OCNG Patterns[Note2]		1, 2, 3	10 MHz: OP.10 FDD		
		4, 5, 6	10 MHz: OP.1 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note3]					
OCNG_RB[Note3]					
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-106 + TT		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7 + TT	7 + TT
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	7 + TT	7 + TT
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-99 + TT	-99 + TT
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-99 + TT	-99 + TT
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall transmit a measurement report containing the cell global identifier of cell 2 within 200 milliseconds from the start of T3.

Test requirement = RRC Procedure delay with additional margin + $T_{identify_CGI,E-UTRAN}$ + reporting delay

= 15 + 30 + 150 + 2ms from the start of T3

= 197 ms, allow 200 ms.

- The UE shall be scheduled continuously throughout the test, and from the start of T3 until 200 ms at least the number of ACK/NACK specified in NOTE 2 shall be detected as being transmitted by the UE.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE 1: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 2: The overall ACK/NACK number is caused by two parts. Firstly, at least X ACK/NACK shall be sent during identifying the cell global identifier of cell 2, where X is defined in Table 8.2.2.2.15-1. Secondly, given that continuous DL data allocation, additional 43, 14 and 34 ACK/NACK shall be sent for FDD 15 kHz, TDD 15 kHz and TDD 30 kHz, respectively, from the start of T3 until 200 ms excludes 150 ms for identifying the cell global identifier of cell 2.

6.6.8 L1-SINR measurement for beam reporting

6.6.8.0 Minimum conformance requirements

6.6.8.0.1 L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured

Same as clause 4.6.7.0.1

The normative reference for this requirement is TS 38.133 [6] clause 9.8.3, 9.8.4.1 and 9.8.5.2.

6.6.8.0.2 L1-SINR reporting with SSB based CMR and dedicated IMR configured

Same as clause 4.6.7.0.2

The normative reference for this requirement is TS 38.133 [6] clause 9.8.3, 9.8.4.2 and 9.8.5.

6.6.8.0.3 L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured

Same as clause 4.6.7.0.3

The normative reference for this requirement is TS 38.133 [6] clause 9.8.3, 9.8.4.3 and 9.8.5.

6.6.8.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX

6.6.8.1.1 Test purpose

To verify that the UE makes correct reporting of L1-SINR measurement in DRX within L1-SINR measurement requirements in TS 38.133 [6] clause 9.8.4.1.

6.6.8.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting L1-SINR measurement and long DRX cycle.

6.6.8.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.8.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.8.1.

6.6.8.1.4 Test description

6.6.8.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.8.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.8.1.4.1-2. Test environment parameters are given in Table 6.6.8.1.4.1-3.

Table 6.6.8.1.4.1-1: NR SA CSI-RS based CMR and no dedicated IMR L1-SINR measurement supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 6.6.8.1.4.1-2: General test parameters for NR SA CSI-RS based CMR and no dedicated IMR L1-SINR measurement

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
DRX configuration	1~3		DRX.3
reportConfigType	1~3		aperiodic
reportQuantity-r16	1~3		cri-SINR-r16
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	26
T1	1~3	s	5
EPRE ratio of PSS to SSS	1~3	dB	0

EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 6.6.8.1.4.1-3: Test Environment parameters for NR SA CSI-RS based CMR and no dedicated IMR L1-SINR measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.8.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.5 for TE Part		

1. Message contents are defined in clause 6.6.8.1.4.3.

2. Single Cell is used, which is NR FR1 Pcell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3. The test parameters are given in tables 6.6.8.1.4.1-2 and 6.6.8.1.5-1. UE is configured to perform RLM and BFD based on the SSBs.

6.6.8.1.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. UE is also configured to measure L1-SINR based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in Table 6.6.8.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.8.1.5-1. T1 starts.

3. After 80ms from the start of the test the SS transmits the DCI trigger in slot 1 for configuration 1, 2 and slot 8 for configuration 3. The corresponding CSI-RS set is transmitted with the offset of 4 slots after the DCI trigger.

4. The SS shall check following requirements:

   - R1: the UE shall send L1-SINR report at slot 26 from the reception of DCI trigger. If the report is received at slot 26 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: The L1-SINR value of CSI-RS#1 reported by the UE is compared to the expected L1-SINR value for CSI-RS#1. If the resulting value is outside the limits in Table 6.6.8.1.5-2 for all test configurations or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

- R3: The DIFF SINR value of CSI-RS #0 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 6.6.8.1.5-4 or the UE fails to report the measurement value for CSI-RS#0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one..

5. If after T1 expiry no report is received or received report did not contain L1-SINR of both CSI-RS#0 and CSI-RS#1 or UE sent the L1-SINR report at different slot than 26 from the reception of DCI trigger, the number of 'failed' iterations is increased by one, otherwise, the number of 'passed' iterations is increased by one.

6. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

7. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.8.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.8.1.4.3-1: Common Exception messages NR SA CSI-RS based CMR and no dedicated IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions APERIODIC and CSI-SINR Table H.3.6A-2 with conditions CSI-RS and APERIODIC Table H.3.7-1 with condition DRX.3

Table 6.6.8.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

6.6.8.1.5 Test requirement

Table 6.6.8.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.8.1.5-1: CSI-RS specific test parameters for NR SA CSI-RS based CMR and no dedicated IMR L1-SINR measurement

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~3	dBm/15kHz	-94.65	
N_{oc} Note1	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~3	dB	0	3
CSI-RS RSRP Note3	1,2	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
Io Note2	1,2	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

After 80ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1.

Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 6.6.8.1.5-2 for all test configurations and the corresponding relative accuracy requirements in Table 6.6.8.1.5-4 for all test configurations.

Table 6.6.8.1.5-2: L1-SINR absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	41
Highest reported value (CSI-RS#1)	64

Table 6.6.8.1.5-3: Void

Table 6.6.8.1.5-4: L1-SINR relative accuracy requirements for the reported values for all test configurations

	T1
Lowest DIFF SINR reported (CSI-RS#0)	0
Highest DIFF SINR reported (CSI-RS#0)	7

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others..

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.8.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX

6.6.8.2.1 Test purpose

To verify that the UE makes correct reporting of L1-SINR measurement in non-DRX within L1-SINR measurement requirements in TS 38.133 [6] clause 9.8.4.2.

6.6.8.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting L1-SINR measurement.

6.6.8.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.8.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.8.2.

6.6.8.2.4 Test description

6.6.8.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.8.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.8.2.4.1-2. Test environment parameters are given in Table 6.6.8.2.4.1-3.

Table 6.6.8.2.4.1-1: NR SA SSB based CMR and dedicated IMR L1-SINR measurement supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 6.6.8.2.4.1-2: General test parameters for NR SA SSB based CMR and dedicated IMR L1-SINR measurement

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	c		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.1A FDD
	2		CSI-RS 1.1A TDD
	3		CSI-RS 2.1A TDD

OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		off
reportConfigType	1~3		periodic
reportQuantity-r16	1~3		ssb-Index-SINR-r16
Number of reported RS	1~3		2
L1-SINR reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 6.6.8.2.4.1-3: Test Environment parameters for NR SA SSB based CMR and dedicated IMR L1-SINR measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.8.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4TBD	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.5 for TE Part		

1. Message contents are defined in clause 6.6.8.2.4.3.

2. Single Cell is used, which is NR FR1 Pcell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3. The test parameters are given in tables 6.6.8.2.4.1-2, 6.6.8.2.5-1 and 6.6.8.2.5-2. UE is configured to perform RLM and BFD based on the SSBs.

6.6.8.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above Table 6.6.8.2.4.1-2. Before the test, UE is configured to perform RLM, BFD and L1-SINR measurement based on the SSBs.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.6.8.2.4.1-2.

2. Set the parameters according to T1 in Table 6.6.8.2.5-1 and Table 6.6.8.2.5-2. T1 starts. SS transmits CSI-RS as IMR with a periodicity of 20 slots.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 80 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in Table 6.6.8.2.5-1 and Table 6.6.8.2.5-2. T2 starts. SS transmits CSI-RS as IMR with a periodicity of 20 slots.

5. If the UE sends L1-SINR reports meeting the corresponding absolute accuracy requirements in Table 6.6.8.2.5-3 for test configurations 1 and 2 the corresponding absolute accuracy requirements in Table 6.6.8.2.5-4 for test configurations 3 and the corresponding relative accuracy requirements in Table 6.6.8.2.5-5 for all test configurations every 80 slots from no later than 720 ms for configuration 1 and 2 and no later than 680 ms for configuration 3 from the beginning of time period T2 until the end of time period T2, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one. The UE shall start sending valid L1-SINR reports. The SS shall check following requirements:

   - R1: the UE shall start to transmit valid reports no later than 720 ms for configuration 1,2 and no later than 680 ms for configuration 3 from the beginning of time period T2. A valid report shall meet the absolute L1-SINR requirement for SSB#1 (Table 6.6.8.2.5-3 for all configurations) and the relative L1-SINR requirement for SSB#0 in Table 6.6.8.2.5-5. If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   - R3: The L1-SINR value of SSB#1 reported by the UE is compared to the expected L1-SINR value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 6.6.8.2.5-3 for all configurations or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

-R4: The DIFF SINR value of SSB#0 reported by the UE is compared to the expected DIFF SINR value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table6.6.8.2.5-5 for all configurations or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.8.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.8.2.4.3-1: Common Exception messages NR SA SSB based CMR and dedicated IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and SS-SINR and CSI-RS_IMR Table H.3.6A-2 with conditions SSB and PERIODIC Table H.3.6A-3 with condition PERIODIC

Table 6.6.8.2.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

6.6.8.2.5 Test requirement

Table 6.6.8.2.5-1 and Table 6.6.8.2.5-2 define the primary level settings including test tolerances for all tests.

Table 6.6.8.2.5-1: SSB specific test parameters for NR SA SSB based CMR and dedicated IMR L1-SINR measurement

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~3	dB	0.5	0.5	-Infinity	3
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.15	-94.15	-Infinity	-91.65
	3		-91.14	-91.14	-Infinity	-88.65
Io Note3	1,2	dBm/9.36 MHz	-63.43	-63.43	-66.70	-61.93
	3	dBm/38.16 MHz	-57.33	-57.33	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1~3	dB	0.5	0.5	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.6.8.2.5-2: CSI-RS specific test parameters for NR SA SSB based CMR and dedicated IMR L1-SINR measurement

Parameter	Config	Unit	CSI-RS#0		CSI-RS#1	
			T1	T2	T1	T2
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/CSI-RS SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~3	dB	0.5	0.5	-Infinity	3
CSI-RS RSRP Note3	1,2	dBm/CSI-RS SCS	-94.15	-94.15	-Infinity	-91.65
	3		-91.14	-91.14	-Infinity	-88.65
Io Note3	1,2	dBm/9.36 MHz	-63.43	-63.43	-66.70	-61.93
	3	dBm/38.16 MHz	-57.33	-57.33	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0.5	0.5	-Infinity	3

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send L1-SINR report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-SINR report including results of both SSB#0+CSI-RS#0 and SSB#1+CSI-RS#1. Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 6.6.8.2.5-3 for all test configurations and the corresponding relative accuracy requirements in Table 6.6.8.2.5-4 for all test configurations.

Table 6.6.8.2.5-3: L1-SINR absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	44
Highest reported value (SSB#1)	-	61

Table 6.6.8.2.5-4: Void

Table 6.6.8.2.5-5: L1-SINR relative accuracy requirements for the reported values for all test configurations

	T1	T2
Lowest DIFF SINR reported (SSB#0)	-	0
Highest DIFF SINR reported (SSB#0)	-	5

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others..

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.8.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX

6.6.8.3.1 Test purpose

To verify that the UE makes correct reporting of L1-SINR measurement in non-DRX within L1-SINR measurement requirements in TS 38.133 [6] clause 9.8.4.3.

6.6.8.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting L1-SINR measurement.

6.6.8.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.8.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.8.3.

6.6.8.3.4 Test description

6.6.8.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.8.3.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.6.8.3.4.1-2. Test environment parameters are given in Table 6.6.8.3.4.1-3.

Table 6.6.8.3.4.1-1: NR SA CSI-RS based CMR and dedicated IMR L1-SINR measurement supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 6.6.8.3.4.1-2: General test parameters for NR SA CSI-RS based CMR and dedicated IMR L1-SINR measurement

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD

CSI-IM configuration	1		CSI-IM.1.2 FDD
	2		CSI-IM.1.2 TDD
	3		CSI-IM.2.2 TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
DRX configuration	1~3		Off
reportConfigType	1~3		aperiodic
reportQuantity-r16	1~3		cri-SINR-r16
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	26
T1	1~3	s	5
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 6.6.8.3.4.1-3: Test Environment parameters for NR SA CSI-RS based CMR and dedicated IMR L1-SINR measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.8.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.5 for TE Part		

1. Message contents are defined in clause 6.6.8.3.4.3.

2. Single Cell is used, which is NR FR1 Pcell. The connection setup is done according to the settings in Annex C.1.2 and C.1.3. The test parameters are given in tables 6.6.8.3.4.1-2 and 6.6.8.3.5-1. UE is configured to perform RLM and BFD based on the SSBs.

6.6.8.3.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. UE is also

configured to measure L1-SINR based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in table 6.6.8.3.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.8.3.5-1. T1 starts.

3. After 80ms from the start of the test the SS transmits the DCI trigger in slot 1 for configuration 1, 2 and slot 8 for configuration 3. The corresponding CSI-RS set is transmitted with the offset of 4 slots after the DCI trigger.

4. The SS shall check following requirements:

   - R1: the UE shall send L1-SINR report at slot 26 from the reception of DCI trigger. If the report is received at slot 26 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: The L1-SINR value of CSI-RS#1 reported by the UE is compared to the expected L1-SINR value for CSI-RS#1. If the resulting value is outside the limits in Table 6.6.8.3.5-2 for all test configurations or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

- R3: The DIFF SINR value of CSI-RS #0 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 6.6.8.3.5-4 or the UE fails to report the measurement value for CSI-RS#0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.5. If after T1 expiry no report is received or received report did not contain L1-SINR of both CSI-RS#0 as CMR + CSI-IM#0 as IMR and CSI-RS#1 as CMR + CSI-IM#1 as IMR or UE sent the L1-SINR report at different slot than 26 from the reception of DCI trigger, the number of 'failed' iterations is increased by one, otherwise, the number of 'passed' iterations is increased by one.

6. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

7. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.8.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.8.3.4.3-1: Common Exception messages NR SA CSI-RS based CMR and dedicated IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions APERIODIC and CSI-SINR and CSI-IM_IMR Table H.3.6A-2 with conditions CSI-RS and APERIODIC Table H.3.6A-4 with condition APERIODIC

Table 6.6.8.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133

Information Element	Value/remark	Comment	Condition
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

6.6.8.3.5 Test requirement

Table 6.6.8.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.8.3.5-1: CSI-RS specific test parameters for NR SA CSI-RS based CMR and dedicated IMR L1-SINR measurement

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1~3	dBm/15kHz	-94.65	
N_{oc} Note1	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~3	dB	0	3
CSI-RS RSRP Note2	1,2	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
Io Note2	1,2	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	3
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

After 80ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-IM#0 as IMR and CSI-RS#1 as CMR + CSI-IM#1 as IMR.

Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 6.6.8.3.5-2 for all test configurations and the corresponding relative accuracy requirements in Table 6.6.8.3.5-4 for all test configurations.

Table 6.6.8.3.5-2: L1-SINR absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	43
Highest reported value (CSI-RS#1)	62

Table 6.6.8.3.5-3: Void

Table 6.6.8.3.5-4: L1-SINR relative accuracy requirements for the reported values for all test configurations

	T1
Lowest DIFF SINR reported (CSI-RS#0)	0
Highest DIFF SINR reported (CSI-RS#0)	6

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.9 Idle Mode CA/DC Measurements

6.6.9.0 Minimum conformance requirements

For a UE which supports *idleInactiveNR-MeasReport-r16* or *idleInactiveEUTRA-MeasReport-r16* the UE shall support the idle mode CA measurements on the serving cell, and carriers configured for idle mode CA/DC measurement reporting provided T331 has not expired, the serving cell is supporting idle mode CA/DC measurement reporting and the serving cell is in the validity area.

This subclause defines the requirements for the detected cell status for the idle mode CA/DC measurement when UE transitions from RRC Connected mode to Idle mode and after UE has entered Idle mode. The requirements are applicable to an NE-DC and NR carrier aggregation capable UE which has been configured with one or more of following, one or more SCells, one E-UTRAN PSCell or one or more downlink E-UTRAN SCells during the Connected mode and which supports *idleInactiveNR-MeasReport-r16* or *idleInactiveEUTRA-MeasReport-r16.* The requirements are applicable for SCell(s) and E-UTRAN FDD and TDD PSCell and SCells.

Upon releasing the connection and if the UE has been configured with idle mode CA measurement reporting, following requirements apply concerning the detected cells in Connected mode upon state transitioning to Idle mode and during Idle mode:

- A cell which is detected cell in Connected mode prior to connection release, shall remain detected after UE has entered Idle mode and during Idle mode, provided that the following conditions are met:
  - The UE has been provided with a list of cells and/or carrier frequencies for early measurement reporting by dedicated RRC signalling and
  - The detected cell is among the list of cells or on a carrier frequency provided for early measurement reporting, and
  - The UE is provided with a valid timer T331 by dedicated RRC signalling, and
  - The detected cell and SSBs remains detectable until UE reconnect to the network and transmits the early measurement report, and
  - The carrier frequency of the detected cell and the carrier frequency of the serving cell are among the supported band combination of the UE.

An inter-RAT E-UTRAN cell is considered detectable according to RSRP, RSRP Ês/Iot, SCH_RP and SCH Ês/Iot defined in TS 36.133 [23] Annex B.1.1 and Annex B.1.2 for a corresponding Band. An inter-frequency cell is considered detectable according to the conditions in TS 38.133 [6] Annex B.1.2 and B.1.3 for a corresponding band. An SSB of an inter-frequency cell is considered detectable according to SSB_RP and SSB Ês/Iot defined in TS 38.133 [6] Annex B.1.2 and B.1.3 for a corresponding Band.

While T331 is running, the UE shall perform measurement on the configured inter-frequency carriers for idle mode CA/DC measurement reporting according to the UE measurement capability.

A UE which supports *idleInactiveNR-MeasReport-r16* shall support idle mode CA/DC measurements of:

- at least 7 inter-frequency carriers which are also configured for inter-frequency mobility measurements, and

- at least 7 inter-frequency carriers which are not configured for inter-frequency mobility measurements.

The UE shall be capable of monitoring a total of at least 7 inter-frequency carriers for idle mode CA/DC measurements comprising of carriers configured for inter-frequency mobility measurements and carriers not configured for inter-frequency mobility measurements.

For inter-frequency carriers configured for idle mode CA/DC measurements, if Srxlev $\leq S_{nonIntraSearchP}$ or Squal $\leq S_{nonIntraSearchQ}$ the inter-frequency measurement requirements in TS 38.133 [6] clause 4.2.2.4 shall apply, where UE shall search for and measure inter-frequency layers configured for idle mode CA/DC measurements in preparation for possible reporting. If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ the UE shall search for inter-frequency layers configured for idle mode CA/DC measurements at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 38.133 [6] clause 4.2.2.7, where UE shall search for and measure inter-frequency layers configured for idle mode CA/DC measurements in preparation for possible reporting.

For UE supporting *idleInactiveNR-MeasBeamReport-r16*, if the UE is configured with *beamMeasConfigIdle-r16* for idle mode CA/DC measurement, the UE shall be capable of performing SS-RSRP, SS-RSRQ for at least

- 7 SSBs with different SSB index and/or PCI on an inter-frequency layer in FR1,
- 10 SSBs with different SSB index and/or PCI on an inter-frequency layer in FR2.

For UE supporting *idleInactiveNR-MeasBeamReport-r16*, if the UE is configured with *beamMeasConfigIdle-r16* for idle mode CA/DC measurement, the UE shall be able to acquire the SSB index for a newly detectable inter-RAT NR cell and perform RSRP/RSRQ measurement within the requirements defined in TS 38.133 [6] clause 4.2.2.4 plus $T_{SSB_index,NR}$, where $T_{SSB_index,NR}$ is the additional time period used to acquire the index of the SSB being measured as defined in table 4.4.2.2-1.

Table 6.6.9.0-1: T_{SSB_index,NR_Inter}

DRX cycle length [s]	Scaling Factor (N1)		T_{SSB_index,NR_Inter} [s] (number of DRX cycles)
	FR1	FR2[Note1]	
0.32	1	8	N2 x 1.28 x N1 x 1.5 (N2 x 4 x N1 x 1.5)
0.64		5	N2 x 1.28 x N1 (N2 x 2 x N1)
1.28		4	N2 x 1.28 x N1 (N2 x 1 x N1)
2.56		3	N2 x 2.56 x N1 (N2 x 1 x N1)
Note 1: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, N1 = 8 for all DRX cycle length. NOTE 2: N2 = 3 if the NR inter-frequency carrier for idle mode CA/DC measurement reporting is in FR1, and N2 = 5 if the NR inter-frequency carrier for idle mode CA/DC measurement reporting is in FR2.			

In the absence or expiration of T331, it is up to UE implementation to perform the idle mode CA/DC measurement.

For inter-frequency carriers configured for idle mode CA/DC measurements, the UE shall be capable of performing SS-RSRP and SS-RSRQ measurements of the carriers, and the UE physical layer shall be capable of reporting SS-RSRP and SS-RSRQ measurements of the carriers configured for idle mode CA/DC measurements to higher layers, with measurement accuracy as specified in clauses [38.133] and [38.133], respectively.

The UE shall be able to report idle mode CA/DC measurements when idle mode CA/DC measurement reporting is requested by the network.

The UE shall measure the RSRP and RSRQ level of the serving cell and evaluate the cell selection criterion S defined in clause 4.2.2.2 and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements of the serving cell to higher layers, with measurement accuracy as specified in TS 38.133 [6] clauses 10.1.2B, 10.1.3B, 10.1.7B and 10.1.8B.

6.6.9.1 NR SA FR1 Idle mode CA/DC measurement for FR1

6.6.9.1.1 Test purpose

The purpose of this test is to verify that the UE performs the required measurements on the serving cell and the configured inter-frequency carrier for idle mode measurement reporting after the UE has entered Idle mode. This test will partly verify the Idle mode CA/DC measurements requirements in TS 38.133 [6] clause 4.4.

6.6.9.1.2 Test applicability

This test applies to all types of NR UE release 16 onwards, supporting 2DL CA and *idleInactiveNR-MeasReport-r16*.

6.6.9.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.9.0.

The normative reference for this requirement is TS 38.133 [6] clause 4.4and A.6.6.9.1

6.6.9.1.4 Test description

6.6.9.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.9.1.4.1-1.

Table 6.6.9.1.4.1-1: Supported test configurations

Test Case ID	Description
6.6.9.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.9.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.9.1-3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Test environment parameters are given in Table 6.6.9.1.4.1-2.

Table 6.6.9.1.4.1-2: Initial conditions for SA Idle mode CA/DC measurement for FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.9.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 6.6.9.1.4.1-3.
2. Message contents are defined in clause 6.6.9.1.4.3.
3. The test scenario comprises of two NR Cells. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.9.1.4.1-3: General test parameters for SA Idle mode CA/DC measurement for FR1

Parameter	Unit	Test configuration	Value	Comment

NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
SMTC-SSB parameters		Config 1	SSB.1 FR1	As specified in clause A.3.10.1
		Config 2	SSB.1 FR1	As specified in clause A.3.10.1
		Config 3	SSB.2 FR1	As specified in clause A.3.10.1
Hysteresis	dB	Config 1,2,3	0	
PRACH configuration index		Config 1,2,3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX in connected mode		Config 1,2,3	OFF	DRX is not used
DRX in idle mode	s	Config 1,2,3	0.32	The value shall be used for all cells in the test.
T331	s		300	
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells
T1	s	Config 1,2,3	10	
T2	s	Config 1,2,3	11.52	
T3	s	Config 1,2,3	10	

6.6.9.1.4.2 Test procedure

Two cells are deployed in the test, one FR1 NR PCell (Cell 1) on RF channel 1 and an FR1 NR neighbour cell (Cell 2) on RF channel 2. The test consists of 3 successive time periods, with time duration of T1, T2, and T3 respectively. During T1, UE is connected to Cell 1 and has not any timing information about Cell 2. UE is configured with early measurement reporting with channel 2. Beam level reporting for early measurements is not configured.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.9.1.5-1. T1 starts.

3. When T1 expires, the SS shall transmit an *RRCRelease* message including *measIdleCarrierListNR-r16* (Table 6.6.9.1.4.3-3) and switch the parameters according to T2 in Table 6.6.9.1.5-2. T2 starts.

4. Ensure the UE is in state RRC_IDLE until T2 expires. T3 starts.

6. The SS transmits in Cell a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State RRC_CONNECTED according to TS 38.508-1 [14]clause 4.5.

7. During the connection setup the UE is reports *idleMeasAvailable-r16* in the *RRCSetupComplete* message.

8. TE shall send the *UEInformationRequest* message, requesting UE to provide ide mode measurements results (Table 6.6.9.1.4.3-5).

9. If UE responds with *UEInformationResponse* message containing the idle mode measurement results with SS-RSRP values within the limits in Table 6.6.9.1.5-3 for configuration 1 and 2 and Table 6.6.9.1.5-4 for configuration 3, and SS-RSRQ values within the limits in Table 6.6.9.1.5-5 for configuration 1, 2 and 3, the number of passed iterations is increased by one. Otherwise, the number of failed iterations is increased by one.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.9.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.9.1.4.3-1: Common Exception messages for SA Idle mode CA/DC measurement for FR1

Default Message Contents	
Common contents of system information blocks exceptions	

Table 6.6.9.1.4.3-2: *SIB1* for SA Idle mode CA/DC measurement for FR1

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
nonCriticalExtension SEQUENCE {			
idleModeMeasurementsNR-r16	TRUE	This field indicates that a UE that is configured for NR idle/inactive measurements shall perform the measurements while camping in this cell and report availability of these measurements when establishing or resuming a connection in this cell. If absent, a UE is not required to perform NR idle/inactive measurements.	
}			
}			

Table 6.6.9.1.4.3-3: *RRCRelease* for SA Idle mode CA/DC measurement for FR1

Derivation Path: TS 38.508-1 [14], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCRelease ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcRelease SEQUENCE {			
MeasIdleConfigDedicated-r16 ::= SEQUENCE {			
measIdleCarrierListNR-r16 ::= SEQUENCE {		Serving cell not included	
MeasIdleCarrierNR-r161 ::= SEQUENCE {			
carrierFreq-r16	ARFCN value of NR channel 2		
ssbSubcarrierSpacing-r16	kHz15	Config 1,2	
	kHz30	Config 3	
frequencyBandList	Not present		
measCellListNR-r16	Not present		
reportQuantities-r16	both		
qualityThreshold-r16	Not present		
ssb-MeasConfig-r16 SEQUENCE {			
nrofSS-BlocksToAverage-r16	Not present		
absThreshSS-BlocksConsolidation-r16	Not present		
smtc-r16	SSB-MTC	TS 38.508-1 [14], Table 7.3.1-3	

ssb-ToMeasure-r16	SSB-ToMeasure	TS 38.508-1 [14], Table 7.3.1-31	
deriveSSB-IndexFromCell-r16	false		
	true		FR1_TDD, FR2_TDD
ss-RSSI-Measurement-r16	Not present		
}			
beamMeasConfigIdle-r16	Not present		
}			
}			
}			
measIdleCarrierListEUTRA-r16	Not present		
measIdleDuration-r16	sec300		
validityAreaList-r16 ::= SEQUENCE {			
ValidityArea-r16 ::= SEQUENCE {			
carrierFreq-r16	ARFCN value of NR channel 1		
validityCellList-r16 ::= SEQUENCE {			
PCI-Range	PhysCellId of Cell 1		
}			
}			
}			
}			
}			
}			

Table 6.6.9.1.4.3-4: *RRCSetupComplete* for SA Idle mode CA/DC measurement for FR1

Derivation Path: TS 38.508-1 [14], Table 4.6.1-22:			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCSetupComplete ::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-TransactionIdentifier		
criticalExtensions CHOICE {			
rrcSetupComplete SEQUENCE {			
idleMeasAvailable-r16	TRUE	Indication that the UE has idle/inactive measurement report available.	
}			
}			
}			

Table 6.6.9.1.4.3-5: *UEInformationRequest*

Derivation Path: 38.508-1 14, Table 4.6.1-32A			
Information Element	**Value/remark**	**Comment**	**Condition**
UEInformationRequest-r16 ::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-TransactionIdentifier		
criticalExtensions CHOICE {			
ueInformationRequest-r16 SEQUENCE {			
idleModeMeasurementReq-r16	TRUE	UE shall report the idle/inactive measurement information, if available, to the network in the *UEInformationResponse* message.	
}			

}			
}			

Table 6.6.9.1.4.3-6: *UEInformationResponse*

Derivation Path: 38.508-1 14, Table 4.6.1-32B			
Information Element	**Value/remark**	**Comment**	**Condition**
UEInformationResponse-r16 ::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-TransactionIdentifier		
criticalExtensions CHOICE {			
ueInformationResponse-r16 SEQUENCE {			
measResultIdleNR-r16 ::= SEQUENCE {			
rsrp-Result-r16	INTEGER(0..127)	Integer value for RSRP measurements is according to Table 10.1.6.1-1 in TS 38.133 14	
}			
}			
}			
}			

6.6.9.1.5 Test requirements

Tables 6.6.9.1.5-1 and 6.6.9.1.5-2 define the primary level settings including test tolerances and tables 6.6.9.1.5-3, 6.6.9.1.5-4, 6.6.9.1.5-5 and 6.6.9.1.5-6 define accuracy requirements define for SA Idle mode CA/DC measurement for FR1.

Table 6.6.9.1.5-1: Cell specific test parameters for connected mode for SA Idle mode CA/DC measurement for FR1

Parameter		**Unit**	**Test configuration**	**Cell 1**			**Cell 2**		
				T1	**T2**	**T3**	**T1**	**T2**	**T3**
NR RF Channel Number			Config 1,2,3	1			2		
Duplex mode			Config 1	FDD					
			Config 2,3	TDD					
TDD configuration			Config 1	Not Applicable					
			Config 2	TDDConf.1.1					
			Config 3	TDDConf.2.1					
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1			NA		
	Initial UL BWP			ULBWP.0.1			NA		
	Dedicated DL BWP			DLBWP.1.1			NA		
	Dedicated UL BWP			ULBWP.1.1			NA		
TRS configuration			Config 1	TRS.1.1 FDD			NA		
			Config 2	TRS.1.1 TDD			NA		
			Config 3	TRS.1.2 TDD			NA		
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1			OP.1		
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			SR.1.1 FDD		
			Config 2	SR.1.1 TDD			SR.1.1 TDD		
			Config 3	SR2.1 TDD			SR2.1 TDD		

CORESET Reference Channel		Config 1	CR.1.1 FDD			CR.1.1 FDD		
		Config 2	CR.1.1 TDD			CR.1.1 TDD		
		Config 3	CR2.1 TDD			CR2.1 TDD		
SSB parameters		Config 1	SSB.1 FR1			SSB.5 FR1		
		Config 2	SSB.1 FR1			SSB.5 FR1		
		Config 3	SSB.2 FR1			SSB.6 FR1		
SMTC configuration defined in A.3.11		Config 1	SMTC.2			SMTC.5		
		Config 2, 3	SMTC.1			SMTC.4		
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15					
		Config 3	30					
EPRE ratio of PSS to SSS		Config 1,2,3	0			0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15 kHz		-98			-98		
N_{oc} Note2	dBm/SCS	Config 1,2	-98			-98		
		Config 3	-95			-95		
SS-RSRP Note 3	dBm/SCS	Config 1,2	-91	-91	-91	-infinity	-98	-98
		Config 3	-88	-88	-88	-infinity	-95	-95
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	7	7	7	-infinity	0	0
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	7	7	7	infinity	0	0
Io Note3	dBm/9.36MHz	Config 1,2	-62.26	-62.26	-62.26	-70.5	-67.04	-67.04
	dBm/38.16MHz	Config 3	-56.15	-56.15	-56.15	-63.94	-60.93	-60.93
Propagation Condition		Config 1,2,3	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 6.6.9.1.5-2: Cell specific test parameters for idle mode for SA Idle mode CA/DC measurement for FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number		1,2,3	1			2		
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	14	14	14	-infinity	12	12
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	7	7	7	-infinity	0	0
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-91	-91	-91	-infinity	-98	-98
		2	-91	-91	-91	-infinity	-98	-98
		3	-88	-88	-88	-infinity	-95	-95
Io	dBm/9.36 MHz	1	-62.26	-62.26	-62.26	-70.5	-67.04	-67.04
	dBm/9.36 MHz	2	-62.26	-62.26	-62.26	-70.5	-67.04	-67.04
	dBm/38.16 MHz	3	-56.15	-56.15	-56.15	-63.94	-60.93	-60.93
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	Not sent			Not sent		
Propagation Condition		1, 2, 3	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.6.9.1.5-3: Absolute accuracy requirements for Cell 1 and Cell 2 SS-RSRP reported values for test configurations 1 and 2

Normal Conditions	T3
Lowest reported value (Cell 1)	54
Highest reported value (Cell 1)	77
Lowest reported value (Cell 2)	47
Highest reported value (Cell 2)	70

Table 6.6.9.1.5-4: Absolute accuracy requirements for Cell 1 and Cell 2 SS-RSRP reported values for test configurations 3

Normal Conditions	T3
Lowest reported value (Cell 1)	57
Highest reported value (Cell 1)	80
Lowest reported value (Cell 2)	50
Highest reported value (Cell 2)	73

Table 6.6.9.1.5-5: Absolute accuracy requirements for Cell 1 and Cell 2 SS-RSRQ reported values for test configurations 1, 2 and 3

Normal Conditions	T3
Lowest reported value (Cell 1)	55
Highest reported value (Cell 1)	72
Lowest reported value (Cell 2)	51
Highest reported value (Cell 2)	67

During the time period T2 the UE is in Idle mode and the signal level of cell 2 is changed. The UE shall not perform reselection. The UE shall perform Idle Mode CA measurement according to Section 4.4.

At the start of T3 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report for cell 2. The UE shall send early measurement report to the PCell.

After receiving the requested early measurement report, the test equipment verifies the accuracy of measurement reported for Cell 2 meets the requirements in Section 10.1.4B for SS-RSRP and 10.1.8B for SS-RSRQ and test ends.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.6.10 to 6.6.14

6.6.15 Idle Mode inter-RAT CA/DC Measurements

6.6.15.0 Minimum conformance requirements

For a UE which supports *idleInactiveNR-MeasReport-r16* or *idleInactiveEUTRA-MeasReport-r16* the UE shall support the idle mode CA measurements on the serving cell, and carriers configured for idle mode CA/DC measurement reporting provided T331 has not expired, the serving cell is supporting idle mode CA/DC measurement reporting and the serving cell is in the validity area.

This subclause defines the requirements for the detected cell status for the idle mode CA/DC measurement when UE transitions from RRC Connected mode to Idle mode and after UE has entered Idle mode. The requirements are applicable to an NE-DC and NR carrier aggregation capable UE which has been configured with one or more of following, one or more SCells, one E-UTRAN PSCell or one or more downlink E-UTRAN SCells during the Connected mode and which supports *idleInactiveNR-MeasReport-r16* or *idleInactiveEUTRA-MeasReport-r16.* The requirements are applicable for SCell(s) and E-UTRAN FDD and TDD PSCell and SCells.

Upon releasing the connection and if the UE has been configured with idle mode CA measurement reporting, following requirements apply concerning the detected cells in Connected mode upon state transitioning to Idle mode and during Idle mode:

- A cell which is detected cell in Connected mode prior to connection release, shall remain detected after UE has entered Idle mode and during Idle mode, provided that the following conditions are met:

- The UE has been provided with a list of cells and/or carrier frequencies for early measurement reporting by dedicated RRC signalling and
- The detected cell is among the list of cells or on a carrier frequency provided for early measurement reporting, and
- The UE is provided with a valid timer T331 by dedicated RRC signalling, and
- The detected cell and SSBs remains detectable until UE reconnect to the network and transmits the early measurement report, and
- The carrier frequency of the detected cell and the carrier frequency of the serving cell are among the supported band combination of the UE.

An inter-RAT E-UTRAN cell is considered detectable according to RSRP, RSRP Ês/Iot, SCH_RP and SCH Ês/Iot defined in TS 36.133 [23] Annex B.1.1 and Annex B.1.2 for a corresponding Band. An inter-frequency cell is considered detectable according to the conditions in TS 38.133 [6] Annex B.1.2 and B.1.3 for a corresponding band. An SSB of an inter-frequency cell is considered detectable according to SSB_RP and SSB Ês/Iot defined in TS 38.133 [6] Annex B.1.2 and B.1.3 for a corresponding Band.

The UE shall measure the RSRP and RSRQ level of the serving cell and evaluate the cell selection criterion S defined in clause 4.2.2.2 and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements of the serving cell to higher layers, with measurement accuracy as specified in TS 38.133 [6] clauses 10.1.2B, 10.1.3B, 10.1.7B and 10.1.8B.

While T331 is running, the UE shall perform measurement on the configured inter-RAT carriers for idle mode CA/DC measurement reporting according to the UE measurement capability.

A UE which supports *idleInactiveEUTRA-MeasReport-r16* shall support idle mode DC measurements of:

- at least 7 E-UTRAN inter-RAT carriers which are also configured for E-UTRAN inter-RATmobility measurements, and
- at least 1 E-UTRAN inter-RAT carrier which is not configured for E-UTRAN inter-RAT mobility measurements.

The UE shall be capable of monitoring a total of at least 7 inter-RAT carriers for idle mode CA/DC measurements comprising of carriers configured for inter-RAT mobility measurements and carriers not configured for inter-RAT mobility measurements.

For inter-RAT carriers configured for idle mode CA/DC measurements, if Srxlev $\leq S_{nonIntraSearchP}$ or Squal $\leq S_{nonIntraSearchQ}$ the inter-RAT measurement requirements in TS 38.133 [6] clause 4.2.2.5 shall apply, where UE shall search for and measure inter-RAT layers configured for idle mode CA/DC measurements in preparation for possible reporting. If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ the UE shall search for inter-RAT layers configured for idle mode CA/DC measurements at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 38.133 [6] clause 4.2.2, where UE shall search for and measure inter-RAT layers configured for idle mode CA/DC measurements in preparation for possible reporting.

For overlapping inter-RAT carriers configured for idle mode CA/DC measurements, the UE shall be capable of performing RSRP and RSRQ measurements of the carriers, and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements of the carriers configured for idle mode CA/DC measurements to higher layers, with measurement accuracy as specified in TS 36.133 [23] clauses in 9.1.3B.3 and 9.1.6B.2, respectively.

The UE shall be able to report idle mode CA measurements when idle mode CA measurement reporting is requested by the network.

6.6.15.1 NR SA FR1 Idle Mode measurements of inter-RAT CA candidate cells for early reporting

6.6.15.1.1 Test purpose

The purpose of this test is to verify that the UE properly retains the detected cell status for the idle mode CA/DC measurement when UE transitions from RRC Connected mode to Idle mode, when the UE has entered Idle mode. Additionally, test that the UE performs the required measurements on the serving cell and the configured inter-RAT

carrier for idle mode measurement reporting. This test will partly verify the Idle mode CA measurements in TS 38.133 [6] clause 4.4. In the test, connected mode DRX configuration is not configured in either PCell or PSCell.

Additionally, the purpose of this test is to verify that the SS-RSRP, SS-RSRQ, RSRP and RSRQ measurement accuracy is within the specified limits. This test will verify the accuracy requirements in TS 38.133 [6] clauses 10.1.2B and 10.1.7B for intra-frequency measurements and clause 10.2.4 and 10.2.5 for the inter-RAT measurements.

6.6.15.1.2 Test applicability

This test applies to all types of NR UE release 16, supporting NE-DC and *idleInactiveEUTRA-MeasReport-r16.*

6.6.15.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.5.15.0.

The normative reference for this requirement is TS 38.133 [6] clauses 4.4, 10.1.2B, 10.1.7B, 10.2.4 and 10.2.5 and A.6.6.15

6.6.15.1.4 Test description

6.6.15.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.15.1.4.1-1.

Table 6.6.15.1.4.1-1: Supported test configurations

Test Case ID	Description
6.6.15.1-1	FR1 FDD SSB SCS 15kHz BW 10MHz – LTE FDD 10MHz
6.6.15.1-2	FR1 FDD SSB SCS 15kHz BW 10MHz – LTE TDD 10MHz
6.6.15.1-3	FR1 TDD SSB SCS 30kHz BW 40MHz – LTE FDD 10MHz
6.6.15.1-4	FR1 TDD SSB SCS 30kHz BW 40MHz – LTE TDD 10MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.6.15.1.4.1-2.

Table 6.6.15.1.4.1-2: Initial conditions for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.15.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 6.6.15.1.4.1-3 and Table 6.6.15.1.4.1-4.
2. Message contents are defined in clause 6.6.15.1.4.3.
3. The test scenario comprises of two NR Cells. (Cell 1 and Cell 2). Cell 1 is configured according to Annex C.1.2 and C.1.3.

Table 6.6.15.1.4.1-3: General test parameters for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1 in FR1

PSCell		Cell 2	PSCell on RF channel number 2 in LTE. Cell 2 is of higher priority.
DRX		OFF	For both PCell and PSCell once configured
PRACH configuration in Cell 2		PRACH_2CE	PRACH configuration as specified in Clause A.3.16 in TS 36.133
T331	s	300	
CSI reporting periodicity and offset configuration for Cell 2	ms	2	
T1	s	0.5	During this time the PCell is known and PSCell is configured.
T2	s	0.5	PSCell access.
T3 + T4	s	66	During this time the UE is configured to perform inter-RAT measurements in idle mode on the PSCell carrier.
T5	s	0.5	UE is paged and connection is setup. Network requests measurement report from the UE.

Table 6.6.15.1.4.1-4: General idle mode test parameters for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Test configuration	Value	Comment
Serving cell		1, 2, 3, 4	Cell1	The UE camps on cell 1 which is the former PCell.
Neighbour cell		1, 2, 3, 4	Cell2	The UE shall perform inter-RAT measurements on cell 2 which is the former PSCell.
RF Channel Number		1, 2, 3, 4	1, 2	
Time offset between cells		1, 2, 3, 4	3 μs	Synchronous cells
Access Barring Information	-	1, 2, 3,4	Not Sent	No additional delays in random access procedure.
SSB configuration		1, 2	SSB.1 FR1	Serving cell
		3, 4	SSB.2 FR1	Serving cell
SMTC configuration Serving cell		1, 2, 3, 4	SMTC.2	
DRX cycle length	s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3, 4	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3, 4	Not configured	
T3	s	1, 2, 3, 4	0.5	T3 needs to be defined so that cell measurement time is taken into account.
T4	s	1, 2, 3, 4	65	T4 needs to be defined so that cell measurement time is taken into account.

6.6.15.1.4.2 Test procedure

Two cells are deployed in the test, cell 1, which is the PCell in connected, and serving cell in idle mode, on radio channel 1 in FR1, and cell 2, which is the PSCell in connected, and measured LTE inter-RAT cell in idle mode, on radio channel 2 in LTE. The test consists of 5 successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. During T1 cell 2, the PSCell, shall be configured.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall set the parameters according to Table 6.6.15.1.5-1 and Table 6.6.15.1.5-2 as appropriate. T1 starts.

3. The SS then shall transmit RRCReconfiguration message with condition NE-DC according to TS 38.508-1 [6] Table 4.6.1-13 to add E-UTRA cell (PSCell).

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall send a PRACH to PSCell during T1.
6. After the UE has transmitted the random-access preamble on the PSCell, the SS shall set T2 parameters according to Table 6.6.15.1.5-1 and Table 6.6.15.1.5-2 as appropriate. T2 starts.
7. After T2, the SS shall set T3 parameters according to Table 6.6.15.1.5-1 and Table 6.6.15.1.5-2 as appropriate and send the RRCRelease. T3 starts.
8. During the time periods T3 and T4 the UE is in Idle mode configured to perform inter-RAT idle mode CA/DC measurements on Cell 2. The UE shall not perform reselection.
9. After T3 is expired, the SS shall set T4 parameters according to Table 6.6.15.1.5-1 and Table 6.6.15.1.5-2 as appropriate. T4 starts.
10. After T4 expires the SS shall set T5 parameters according to Table 6.6.15.1.5-1 and Table 6.6.15.1.5-2 as appropriate, T5 starts.
11. The SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity). During the connection setup the UE is reports *idleMeasAvailable-r16* in the *RRCSetupComplete* message.
12. The SS shall send the *UEInformationRequest* message, requesting UE to report idle mode CA/DC measurements.
13. If UE responds with *UEInformationResponse* message containing the idle mode measurement results with SS-RSRP values within the limits in Table 6.6.15.1.5-3 for configuration 1 and 2 and Table 6.6.15.1.5-4 for configuration 3, and SS-RSRQ values within the limits in Table 6.6.15.1.5-5 for configuration 1, 2 and 3, the number of passed iterations is increased by one. Otherwise, the number of failed iterations is increased by one.
14. If paging in step 11 succeeds, go to step 15, otherwise switch off the UE.
15. Switch on the UE and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR with Connected without release On according to TS 38.508-1 [14] clause 4.5.
16. Repeat step 2-15 until a test verdict has been achieved.

6.6.15.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.6.15.1.4.3-1: Common Exception messages for

Default Message Contents	
Common contents of system information blocks exceptions	

Table 6.6.15.1.4.3-2: *SIB1* for NR SA FR1 Idle mode CA/DC measurement of inter-RAT DC candidate cells for early reporting

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
nonCriticalExtension SEQUENCE {			
idleModeMeasurementsEUTRA-r16	TRUE	This field indicates that a UE that is configured for EUTRA idle/inactive measurements shall perform the measurements while camping in this cell and report availability of these measurements when establishing	

		or resuming a connection in this cell. If absent, a UE is not required to perform EUTRA idle/inactive measurements.	
}			
}			

Table 6.6.15.1.4.3-3: *RRCRelease* for SA Idle mode CA/DC measurement for FR1

Derivation Path: TS 38.508-1 [14], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCRelease ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcRelease SEQUENCE {			
MeasIdleConfigDedicated-r16 ::= SEQUENCE {			
measIdleCarrierListNR-r16 ::= SEQUENCE {	Not present		
measIdleCarrierListEUTRA-r16 ::= SEQUENCE {			
MeasIdleCarrierEUTRA-r16 ::= SEQUENCE {			
carrierFreqEUTRA-r16	ARFCN value of Cell 2		
EUTRA-AllowedMeasBandwidth	mbw6		
measCellListEUTRA-r16	Not present		
reportQuantitiesEUTRA-r16	both		
qualityThresholdEUTRA-r16	Not present		
}			
}			
measIdleDuration-r16	sec300		
validityAreaList-r16 ::= SEQUENCE {			
ValidityArea-r16 ::= SEQUENCE {			
carrierFreq-r16	ARFCN value of NR channel 1		
validityCellList-r16 ::= SEQUENCE {			
PCI-Range	PhysCellId of Cell 1		
}			
}			
}			
}			
}			
}			

Table 6.6.15.1.4.3-4: *RRCSetupComplete* for SA Idle mode CA/DC measurement for FR1

Derivation Path: TS 38.508-1 [14], Table 4.6.1-22:			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCSetupComplete ::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-TransactionIdentifier		
criticalExtensions CHOICE {			
rrcSetupComplete SEQUENCE {			
idleMeasAvailable-r16	TRUE	Indication that the UE has idle/inactive measurement report available.	
}			
}			
}			

Table 6.6.15.1.4.3-5: *UEInformationRequest*

Derivation Path: 38.508-1 14, Table 4.6.1-32A			
Information Element	**Value/remark**	**Comment**	**Condition**
UEInformationRequest-r16 ::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-TransactionIdentifier		
criticalExtensions CHOICE {			
ueInformationRequest-r16 SEQUENCE {			
idleModeMeasurementReq-r16	TRUE	UE shall report the idle/inactive measurement information, if available, to the network in the *UEInformationResponse* message.	
}			
}			
}			

Table 6.6.15.1.4.3-6: *UEInformationResponse*

Derivation Path: 38.508-1 14, Table 4.6.1-32B			
Information Element	**Value/remark**	**Comment**	**Condition**
UEInformationResponse-r16 ::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-TransactionIdentifier		
criticalExtensions CHOICE {			
ueInformationResponse-r16 SEQUENCE {			
measResultIdleEUTRA-r16 ::= SEQUENCE {			
measResultsPerCarrierListIdleEUTRA-r16 SEQUENCE			
carrierFreqEUTRA-r16	ARFCN of Cell 2		
measResultsPerCellListIdleEUTRA-r16 SEQUENCE			
rsrp-ResultEUTRA-r16	INTEGER (0..97)		
rsrq-ResultEUTRA-r16	INTEGER (-30..46)		
}			
}			
}			
}			

6.6.15.1.5 Test requirements

Tables 6.6.15.1.5-1 and 6.6.15.1.5-2 define the primary level settings including test tolerances and tables 6.6.15.1.5-3, 6.6. 15.1.5-4, 6.6. 15.1.5-5 and 6.6.15.1.5-6 define accuracy requirements define for Idle mode CA/DC measurement.

Table 6.6.15.1.5-1: Cell specific test parameters for NR cell for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Config	Test 1				
			Cell 1				
			T1	T2	T3	T4	T5
AoA setup		1,2,3,4	N/A				
Assumption for UE beams Note 5 R: Rough		1,2,3,4	N/A	N/A	R	R	N/A
Frequency Range		1,2,3,4	FR1				
Duplex mode		1, 2	FDD				
		3, 4	TDD				
TDD Configuration 1: TDDConf.1.1 2: TDDConf.2.1		1,2	-				
		3,4	1	1	2	2	1
$BW_{channel}$	MHz	1, 2	1	1	-	-	1

1: 10: $N_{RB,c}$ = 52 2: 40: $N_{RB,c}$ = 106		3, 4	2	2	-	-	2
Initial Downlink BWP configuration		1,2,3,4	DLBWP.0.1				
Initial Uplink BWP configuration		1,2,3,4	ULBWP.0.1				
Dedicated Downlink BWP configuration 1: DLBWP.1.1		1,2,3,4	1	1	-	-	1
Dedicated Uplink BWP configuration 1: ULBWP.1.1		1,2,3,4	1	1	-	-	1
PDSCH Reference Measurement Channel 1: SR.1.1 FDD 2: SR.2.1 TDD	FDD	1,2	1	1	1	1	1
	TDD	3,4	2	2	2	2	2
TRS configuration		1,2,3,4	-				
TCI state		1,2,3,4	-				
RMSI CORESET parameters	FDD	1,2	CR.1.1 FDD				
	TDD	3,4	CR.2.1 TDD				
Dedicated CORESET parameters	FDD	1,2	CCR.1.1 FDD				
	TDD	3,4	CCR.2.1 TDD				
OCNG Patterns[Note1]		1,2,3,4	OP.1 defined in A.3.2.1				
SSB configuration 1: SSB.1 FR1 2: SSB.2 FR1		1,2	1				
		3,4	2				
SMTC configuration		1,2,3,4	SMTC.2				
Correlation Matrix and Antenna config		1,2,3,4	1x2 Low				
EPRE ratio of PSS to SSS	dB	1,2,3,4	0	0	-	-	0
EPRE ratio of PBCH DMRS to SSS			0	0	-	-	0
EPRE ratio of PBCH to PBCH DMRS			0	0	-	-	0
EPRE ratio of PDCCH DMRS to SSS			0	0	-	-	0
EPRE ratio of PDCCH to PDCCH DMRS			0	0	-	-	0
EPRE ratio of PDSCH DMRS to SSS			0	0	-	-	0
EPRE ratio of PDSCH to PDSCH			0	0	-	-	0
EPRE ratio of OCNG DMRS to SSS			0	0	-	-	0
N_{oc} [Note2]	dBm/ 15kHz	1,2	-98	-98	-98	-98	-98
		3,4					
N_{oc} [Note2]	dBm/SCS	1,2	-98	-98	-98	-98	-98
		3,4	-95	-95	-95	-95	-95
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	5	5	5	5	5
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	5	5	5	5	5
SS-RSRP[Note3,4]	dBm/SCS	1,2	-93	-93	-93	-93	-93
		3,4	-90	-90	-90	-90	-90
Io[Note3,4]	dBm/ 9.36 MHz	1,2	-63.85	-63.85	-63.85	-63.85	-63.85
	dBm/ 38.16 MHz	3,4	-57.76	-57.76	-57.76	-57.76	-57.76
Qrxlevmin	dBm/SCS	1, 2	-	-	-140		-
	dBm/SCS	3, 4	-	-	-137		-
Pcompensation	dB	1,2,3,4	-	-	0	0	-
$Qhyst_s$	dB	1,2,3,4	-	-	0	0	-
$Qoffset_{s,n}$	dB	1,2,3,4	-	-	0	0	-
Cell_selection_and_ reselection_quality_measurement		1,2,3,4	SS-RSRP				
Treselection	s	1,2,3,4	-		0		-
SnonintrasearchP	dB	1,2,3,4	-		Not sent		-

SnonintrasearchQ	dB	1,2,3,4	-	Not sent	-
$Thresh_{x, high}$	dB	1,2,3,4	-	52	-
Propagation Condition	dB	1,2,3,4	-	AWGN	-

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 6.6.15.1.5-2: Cell specific test parameters for LTE cell for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Config	Test 1				
			Cell 2				
			T1	T2	T3	T4	T5
Frequency Range		1,2,3,4	LTE				
Duplex mode		1, 3	FDD				
		2, 4	TDD				
$BW_{channel}$	MHz	1,2,3,4	10	10	-	-	10
Measurement bandwidth	n_{PRB}	1,2,3,4	-	-	22-27	22-27	-
PDSCH Reference Measurement Channel 1: R.1 FDD 2: R.1 TDD	FDD	1,3	1	1	-	-	1
	TDD	2,4	2	2	-	-	2
PDCCH/PCFICH/PHICH Reference measurement channel defined in A.3.1.2.1 and A.3.1.2.2 in 36.133 1: R.6 FDD 2: R.6 TDD		1,3	1	1	-	-	1
		2,4	2	2	-	-	2
OCNG Patterns defined in A.3.2.1.1 (OP.2 FDD) and A.3.2.1.2 (OP.2 TDD) in 36.133 1: OP.2 FDD 2: OP.2 TDD		1,3	1				
		2,4	2				
Correlation Matrix and Antenna config		1,2,3,4	1x2 Low				
PBCH_RA	dB	1,2,3,4	N/A	N/A	0	0	N/A
PBCH_RB			N/A	N/A	0	0	N/A
PSS_RA			N/A	N/A	0	0	N/A
SSS_RA			N/A	N/A	0	0	N/A
PCFICH_RB			N/A	N/A	0	0	N/A
PHICH_RA			N/A	N/A	0	0	N/A
PHICH_RB			N/A	N/A	0	0	N/A
PDCCH_RA			N/A	N/A	0	0	N/A
PDCCH_RB			N/A	N/A	0	0	N/A
PDSCH_RA			N/A	N/A	0	0	N/A
PDSCH_RB			N/A	N/A	0	0	N/A
OCNG_RA Note 1			N/A	N/A	0	0	N/A
OCNG_RB Note 1			N/A	N/A	0	0	N/A
N_{oc} Note2	dBm/ 15kHz	1,2	-98	-98	-98	-98	-98
		3,4					
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	5	5	-3	8	5
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	5	5	-3	8	5
RSRP Note3,4	dBm/SCS	1,2,3,4	-93	-93	-101	-90	-93
Io Note3,4	dBm/ 9.36 MHz	1,2, 3, 4	-61.01	-61.01	-65.44	-58.57	-61.01
Qrxlevmin	dBm/SCS	1,2,3,4	-	-	-140		-

Pcompensation	dB	1,2,3,4	-	-	0	0	-
$Qhyst_s$	dB	1,2,3,4	-	-	0	0	-
$Qoffset_{s,n}$	dB	1,2,3,4	-	-	0	0	-
Cell_selection_and_ reselection_quality_measurement		1,2,3,4	RSRP and RSRQ				
Treselection	s	1,2,3,4	-		0		-
SnonintrasearchP	dB	1,2,3,4	-		Not sent		-
SnonintrasearchQ	dB	1,2,3,4	-		Not sent		-
Propagation Condition	dB	1,2,3,4	-		AWGN		-
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							

Table 6.6.15.1.5-3: Absolute accuracy requirements for the Cell 1 and Cell 2 RSRP reported values for test configurations 1 and 2

Normal Conditions	T5
Lowest reported value (Cell 1)	52
Highest reported value (Cell 1)	75
Lowest reported value (Cell 2)	39
Highest reported value (Cell 2)	62

Table 6.6.15.1.5-4: Absolute accuracy requirements for the Cell 1 and Cell 2 RSRP reported values for test configurations 3

Normal Conditions	T5
Lowest reported value (Cell 1)	55
Highest reported value (Cell 1)	78
Lowest reported value (Cell 2)	39
Highest reported value (Cell 2)	62

Table 6.6.15.1.5-5: Absolute accuracy requirements for the Cell 1 and Cell 2 RSRQ reported values for test configurations 1, 2 and 3.

Normal Conditions	T5
Lowest reported value (Cell 1)	54
Highest reported value (Cell 1)	71
Lowest reported value (Cell 2)	6
Highest reported value (Cell 2)	27

During time durations T1 the UE shall start transmitting preamble on PSCell. During T2 the UE perform intra-frequency measurements on the PCell and the PSCell.

During the time-period T3 the connection is released, and UE enters idle mode. During the time period T3 and T4 the UE is camped in Idle mode and at T4 the signal level of cell 2 is changed. The UE shall not perform reselection. The UE shall perform Idle Mode DC/CA measurement according to Section 4.4.

At the start of T5 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report. The UE shall send early measurement report to the PCell including idle mode CA/DC measurement from cell 2.

After receiving the requested early measurement report, the test equipment verifies that the accuracy of measurement reported for serving Cell 1 and Cell 2 meets the requirements in Sections 10.1.2B and 10.1.7B and Sections 10.2.4 and 10.2.5, respectively and test ends.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.6.16

6.6.17 NR SA FR1 event triggered reporting tests with Pre-MG

6.6.17.0 Minimum conformance requirements

6.6.17.0.1 Minimum conformance requirements for event-triggered measurement with gap

[TS 38.133 [6], clause 9.2.6.2, 9.2.6.3]

When a measurement gap is provided or an activated Pre-MG is provided without any pre-MG status changed during the measurement period, the UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index.}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2 with SCS smaller or equal to 480 kHz.

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 6.6.17.0.1-1.

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 6.6.17.0.1-2.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in TS38.133[6] clause 9.1.5.2 for measurement conducted within measurement gaps.

K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. K_{gap} = 1 when the UE is not configured with concurrent measurement gaps or not supporting [concurrent measurement gaps]. Otherwise, $K_{gap} = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

For a window W of duration max(SMTC period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap and per-FR measurement gap within the same FR as the SSB frequency layer, and starting from the beginning of any SMTC occasion:

-- N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W, including those overlapped with other measurement gap occasions within the window, and

$N_{available}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3.

When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{available}$ =0.

The UE shall be able to identify a new detectable intra-frequency cell within the time period specified in TS 38.133 [6].

For a UE that supports Pre-MG, an SMTC occasion is only considered to be overlapped by Pre-MG if the Pre-MG is activated.

The normative reference for this Intra-frequency measurements with measurement gaps requirement is in TS 38.133 [6] clauses 9.2.2, 9.2.4.3 and 9.2.6.

Table 6.6.17.0.1-1: Time period for PSS/SSS detection (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, 5 x K_{gap} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil($M2^{Note\ 1}$x 5 x K_{gap}) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(5 x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1.	

NOTE 2:	When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.
NOTE 3:	For a UE supporting concurrent measurement gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.
NOTE 4:	When highSpeedMeasCA-Scell-r17 is configured, the requirements apply to UE on measurements of secondary component carrier with active SCell.

Table 6.6.17.0.1-2: Measurement period for intra-frequency measurements with gaps(FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, ceil(5 x K_{gap})x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_{gap}) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(5 x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	

[TS 38.133 [6], clause 9.2.2]

The requirements given above apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] sections 10.1.2 are fulfilled for a corresponding Band,
- SS-RSRQ related side conditions given in TS 38.133 [6] sections 10.1.7 are fulfilled for a corresponding Band,
- SS-SINR related side conditions given in TS 38.133 [6] Sections 10.1.12 are fulfilled for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.2 for a corresponding Band.

[TS 38.133 [6], clause 9.2.4.3]

Reported RSRP, RSRQ, and RS-SINR measurements contained in event triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.1.2.1 (RSRP for FR1), 10.1.7.1 (RSRQ for FR1), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify\ intra\ without\ index}$ defined in TS 38.133 [6] clause 9.2.5.1 or clause 9.2.6.2. When L3 filtering is used an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ as defined in TS 38.133 [6] clause 9.2.5.1 or clause 9.2.6.2. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index}$ or $T_{identify\ intra\ with\ index}$ defined in TS 38.133 [6] clause 9.2.5.1 or clause 9.2.6.2 becomes undetectable for a period $\leq$ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as

defined in clause 4.2 of TS 38.211 [7]. When L3 filtering is used, an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

6.6.17.1 NR SA FR1 event triggered reporting tests with autonomous activation/deactivation Pre-MG

6.6.17.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct measurement and corresponding event reporting. This test will partly verify the intra-frequency cell search requirements in TS 38.133 [6] clause 9.2.6.2 and 9.2.6.3. And this test will also jointly verify pre-configured measurement gap activation/deactivation delay in TS 38.133 [6] clause 8.19.2.

6.6.17.1.2 Test applicability

This test applies to all types of NR UEs supporting 5GS NR SA FR1, BWP adaptation of at least 2 BWPs, BWP operation without bandwidth restriction, DCI and timer-based active BWP switching delay Type1 or Type2, CSI-RS-based RLM *and preconfiguredUE-AutonomousMeasGap-r17* capability from release 17 onwards.

6.6.17.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.17.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.17.1.

6.6.17.1.4 Test description

6.6.17.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.17.1.4-1.

Table 6.6.17.1.4.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Test environment parameters are given in Table 6.6.17.1.4.1-2.

Table 6.6.17.1.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.17.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.		

1. The general test parameter settings are set up according to Table 6.6.17.1.4.1-3.

2. Message contents are defined in clause 6.6.17.1.4.3.

3. There are one NR carrier and two cells specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.6.17.1.4.1-3: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3	Per-UE gaps	
Measurement gap Repetition periodicity	ms	1, 2, 3	40	
Measurement gap length	ms	1, 2, 3	6	
Measurement gap offset	ms	1, 2, 3	39	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX	ms	1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	0.1	
T2	s	1, 2, 3	0.2	
T3	s	1,2, 3	5	
bwp-InactivityTimer	ms		500	

6.6.17.1.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

There are two BWPs configured in Cell 1, BWP-1 which contains the cell defining SSB, and BWP-2 which does not contain any SSB of Cell 1.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.17.1.4.1-3 and Table 6.6.17.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. SS shall transmit an *RRCReconfiguration* message which include with Measurement configuration and 2 different UE-specific bandwidth parts for Cell 1 (PCell), BWP-1 and BWP-2.

   - UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in PCell.

   - Pre-MG status is assumed to be 'deactivated' when the BWP is active.

   - BWP-1 includes bandwidth of the initial DL BWP and SSB.

   - BWP-2 does not include bandwidth of the initial DL BWP and SSB.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE would have ACK/NACK sending for those PDSCHs scheduled in the slots overlapped with the pre-MG occasions in T1.

6. When T1 expires, at the start of time duration T2, the serving gNB trigger Pre-MG activation starts via the DCI format 1_1 command for PCell DL BWP switch, is received at the UE side in PCell's slot # denoted i. The UE shall switch its bandwidth part from BWP-1 to BWP-2. And UE is expected to complete the Pre-MG activation within the beginning of PCell's DL slot (i+TBWPswitchDelay) + 5ms in T2 as defined in TS 38.133 [6] clause 8.6.2 and clause 8.19.2.

7. At the start of time duration T3, the SS shall switch the power setting from T2 to T3 as specified in Table 6.6.17.1.5-1.

8. The UE shall NOT be able to receive PDSCH and report corresponding ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

9. The UE shall transmit a *MeasurementReport* message triggered by Event A3. With the overall delays measured from the beginning of time period T3 is less than 802 ms.

10. After the SS receive the *MeasurementReport* message in step 9 or when T3 expires, the SS shall:

    - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

11. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop.

12. Depending on the choice in Step 10, the SS:
    - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
    Or
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.17.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.17.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ and GAP NEEDED Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-6 with conditions Pattern #0 and Pre-CFG Table H.3.1-7 with condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM

Table 6.6.17.1.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	Entry 1: BWP-1	
BWP-Downlink[2]	BWP-Downlink with condition BWP-Id2	Entry 2: BWP-2	
}			
firstActiveDownlinkBWP-Id	1	BWWP-1	
defaultDownlinkBWP-Id	0	Initial BWP	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	Entry 1: BWP-1	
BWP-Uplink[2]	BWP-Uplink with condition BWP-Id2	Entry 2: BWP-2	
}			
firstActiveUplinkBWP-Id	1	BWP-1	
}			
}			

6.6.17.1.5 Test requirement

Table 6.6.17.1.4.1-3 and Table 6.6.17.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.17.1.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
Initial BWP configuration		1,2,3	DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1		
BWP-1 Configuration		1,2,3	DLBWP.1.3 ULBWP.1.3			N/A		
BWP-2 Configuration		1,2,3	DLBWP.1.2 ULBWP.1.2			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			N/A		
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					

RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		CCR.1.1 FDD	
		2	CCR.1.2 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s / I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

During T1,

The UE shall report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

During T2,

The UE is expected to complete the Pre-MG activation within the beginning of PCell's DL slot (i+TBWPswitchDelay) + 5ms in T2 as defined in TS 38.133 [6] clause 8.6.2 and clause 8.19.2.

During T3,

The UE shall NOT be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

The UE shall send one Event A3 triggered measurement report, with a overall measurement reporting delay less than 802ms from the beginning of time period T3.

NOTE: this gives a total of 800 ms for measurement reporting delay plus 2 ms for $2xTTI_{DCCH}$ insertion uncertainty.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}$

T_{PSS/SSS_sync_intra} = 600 ms

$T_{SSB_measurement_period_intra}$ = 200 ms

TTI insertion uncertainty = 2 ms

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.17.2 NR SA FR1 event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation

6.6.17.2.1 Test purpose

The purpose of this test is to verify that the UE correctly activates and deactivates the pre-MG and makes correct measurement and reporting of an event with activated and deactivated pre-MG. This test will partly verify the pre-MG activation and deactivation delay requirements in TS 38.133 [6] clause 8.19.2 and the intra-frequency cell search requirements in TS 38.133 [6] clause 9.2.6.2 and 9.3.4.

6.6.17.2.2 Test applicability

This test applies to all types of NR UEs supporting 5GS NR SA FR1, BWP adaptation of at least 2 BWPs, BWP operation without bandwidth restriction, DCI and timer-based active BWP switching delay Type1 or Type2, CSI-RS-based RLM *an*d *preconfiguredNW-ControlledMeasGap-r17* capability from release 17 onwards.

6.6.17.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.17.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.17.2.

6.6.17.2.4 Test description

6.6.17.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.17.2.4-1.

Table 6.6.17.2.4.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Test environment parameters are given in Table 6.6.17.2.4.1-2.

Table 6.6.17.2.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.17.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.		

1. The general test parameter settings are set up according to Table 6.6.17.2.4.1-3.

2. Message contents are defined in clause 6.6.17.2.4.3.

3. There are one NR carrier and two cells specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.6.17.2.4.1-3: General test parameters for SA intra-frequency event triggered reporting with pre-configured measurement gaps and network-controlled activation/deactivation

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2, 3	40	
Measurement gap length	ms	1, 2, 3	6	
Measurement gap offset	ms	1, 2, 3	39	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX	ms	1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	0.1	
T2	s	1, 2, 3	0.1	
T3	s	1, 2, 3	5	

6.6.17.2.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

There are two BWPs configured in Cell 1, BWP-1 which contains the cell defining SSB, and BWP-2 which does not contain any SSB of Cell 1.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. A pre-MG is configured before the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.17.2.4.1-3 and Table 6.6.17.2.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. SS shall transmit an *RRCReconfiguration* message which include with Measurement configuration and 2 different UE-specific bandwidth parts for Cell 1 (PCell), BWP-1 and BWP-2.

   - UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in PCell.

   - BWP-1 includes bandwidth of the initial DL BWP and SSB with preConfGapStatus for BWP-1 is set to ‘0’ as ‘deactivated’.

   - BWP-2 does not include bandwidth of the initial DL BWP and SSB with preConfGapStatus for BWP-2 is set to ‘1’ as ‘activated’.

4. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

5. PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE would have ACK/NACK sending for those PDSCHs scheduled in the slots overlapped with the pre-MG occasions in T1.

6. When T1 expires, at the start of time duration T2, the serving gNB trigger Pre-MG activation starts via the DCI format 1_1 command for PCell DL BWP switch, is received at the UE side in PCell’s slot # denoted i. The UE shall switch its bandwidth part from BWP-1 to BWP-2. And UE is expected to complete the Pre-MG activation within the beginning of PCell’s DL slot (i+TBWPswitchDelay) + 5ms in T2 as defined in TS 38.133 [6] clause 8.6.2 and clause 8.19.2.

7. At the start of time duration T3, the SS shall switch the power setting from T2 to T3 as specified in Table 6.6.17.2.5-1.

8. The UE shall NOT be able to receive PDSCH and report corresponding ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

9. The UE shall transmit a MeasurementReport message triggered by Event A3. With the overall delays measured from the beginning of time period T3 is less than 802 ms.

10. After the SS receive the MeasurementReport message in step 9 or when T3 expires, the SS shall:

    - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

11. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

12. Depending on the choice in Step 10, the SS:

- if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
  Or
  - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.17.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.17.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ and GAP NEEDED Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-6 with conditions Pattern #0 and Pre-CFG Table H.3.1-7 with condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM

Table 6.6.17.2.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	Entry 1: BWP-1	
BWP-Downlink[2]	BWP-Downlink with condition BWP-Id2	Entry 2: BWP-2	
}			
firstActiveDownlinkBWP-Id	1	BWP-1	
defaultDownlinkBWP-Id	0	Initial BWP	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	Entry 1: BWP-1	
BWP-Uplink[2]	BWP-Uplink with condition BWP-Id2	Entry 2: BWP-2	
}			
firstActiveUplinkBWP-Id	1	BWP-1	
}			
}			

Table 6.6.17.2.4.3-3: *BWP-DownlinkDedicated*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-11			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-DownlinkDedicated ::= SEQUENCE {			

downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1] {	BWP-Downlink with condition BWP-Id0	DLBWP.1.3 configuration	
EXTENSION {			
preConfGapStatus-r17	00000000	DLBWP.1.3 configuration	
}			
}			
BWP-Downlink[1] {	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
EXTENSION {			
preConfGapStatus-r17	10000000	DLBWP.1.2 configuration	
}			
}			
}			
}			

6.6.17.2.5 Test requirement

Table 6.6.17.2.4.1-3 and Table 6.6.17.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.17.2.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			N/A		
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD			N/A		
		2	CR.1.1 TDD			N/A		
		3	CR.2.1 TDD			N/A		
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD			N/A		
		2	CCR.1.2 TDD			N/A		
		3	CCR.2.1 TDD			N/A		
OCNG Patterns		1, 2, 3	OP.1			OP.1		
TRS configuration		1	TRS.1.1 FDD			N/A		
		2	TRS.1.1 TDD			N/A		
		3	TRS.1.2 TDD			N/A		
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1			N/A		
Active DL BWP configuration for BWP-1		1, 2, 3	DLBWP.1.3			N/A		
Active UL BWP configuration for BWP-1		1, 2, 3	ULBWP.1.3			N/A		
Active DL BWP configuration for BWP-2		1, 2, 3	DLBWP.1.2			N/A		

Active UL BWP configuration for BWP-2		1, 2, 3	ULBWP.1.2			N/A		
RLM-RS		1, 2, 3	CSI-RS			N/A		
N_{oc} Note 2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note 2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/I_{ot}$	dB	1,2,3	4	4	-1.46	-Infinity	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2,3	4	4	4	-Infinity	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1,2	-94	-94	-94	-Infinity	-Infinity	-94
		3	-91	-91	-91	-Infinity	-Infinity	-91
Io	dBm/9.36 MHz	1,2	-64.60	-64.60	-62.25	-64.60	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-58.50	-56.16	-58.50	-58.50	-56.16
Propagation Condition		1, 2, 3	AWGN					

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2 and T4.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

During T1,

The UE shall report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

During T2,

The UE is expected to complete the Pre-MG activation within the beginning of PCell's DL slot (i+TBWPswitchDelay) + 5ms in T2 as defined in TS 38.133 [6] clause 8.6.2 and clause 8.19.2.

During T3,

The UE shall NOT be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

The UE shall send one Event A3 triggered measurement report, with an overall measurement reporting delay less than 802ms from the beginning of time period T3.

NOTE: this gives a total of 800 ms for measurement reporting delay plus 2 ms for 2xTTI_{DCCH} insertion uncertainty.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}$

T_{PSS/SSS_sync_intra} = 600 ms

$T_{SSB_measurement_period_intra}$ = 200 ms

TTI insertion uncertainty = 2 ms

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.18 SA event triggered reporting tests with concurrent gaps

6.6.18.0 Minimum conformance requirements

6.6.18.0.1 Minimum conformance requirements for Intra-frequency measurement

The UE shall be able to identify a new detectable intra-frequency cell within the time period specified in TS 38.133 [6].

Intra-frequency measurements without measurement gaps:

When UE supports *concurrentMeasGap-r17* and is configured with concurrent measurement gaps,

K_p is the scaling factor for an SSB frequency layer to be measured without measurement gaps. $K_p = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

- For a window W of duration max(SMTC period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap and/or per-FR measurement gap within the same FR as the SSB frequency layer, and starting from the beginning of any SMTC occasion:
  - N_{total} is the total number of SMTC occasions within the window, including those overlapped with measurement gap occasions within the window, and
  - $N_{available}$ is the number of SMTC occasions that are not overlapped with any non-dropped MG occasion within the window W, after accounting for measurement gap collisions by applying the measurement gap collision rule in TS 38.133 [6] section 9.1.8.3.

    $K_p = 1$ when $N_{available} = 0$.
- Otherwise, when UE is not configured with or UE does not support concurrent measurement gaps:

  When intra-frequency SMTC is fully non overlapping with measurement gaps or intra-frequency SMTC is fully overlapping with MGs, $K_p = 1$

  When intra-frequency SMTC is partially overlapping with measurement gaps, K_p = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP. When intra-frequency SMTC is partially overlapping with the ML of NCSG, K_p = 1/(1- (SMTC period /VIRP)), where SMTC period < VIRP. For calculation of K_p, if the high layer signalling (TS 38.331 [13]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*.

  If the higher layer signalling in TS38.331 [13] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, time period requirements are not specified to identify a new detectable intra-frequency cell.

Intra-frequency measurements with measurement gaps:

K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. $K_{gap} = 1$ when the UE is not configured with concurrent measurement gaps or not supporting [concurrent measurement gaps]. Otherwise, $K_{gap} = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

For a window W of duration max(SMTC period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap and per-FR measurement gap within the same FR as the SSB frequency layer, and starting from the beginning of any SMTC occasion:

- N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W, including those overlapped with other measurement gap occasions within the window, and
- $N_{available}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W after accounting for measurement gap collisions by applying the measurement gap collision rule in TS 38.133 [6] section 9.1.8.3.

When concurrent measurement gaps are configured, requirements in this clause do not apply if$N_{available} = 0$.

If the higher layer signalling in TS 38.331 [13] of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, time period requirements are not specified for identify a new detectable intra-frequency cell.

The normative reference for this requirement is TS 38.133 [6] clauses 9.2.2, 9.2.4.3, 9.2.5 and 9.2.6.

6.6.18.0.2 Minimum conformance requirements for Inter-frequency measurement

The UE shall be able to identify a new detectable inter-frequency cell within the time period specified in TS 38.133 [6].

Inter-frequency measurements without measurement gaps:

When UE supports *concurrentMeasGap-r17* and is configured with concurrent measurement gaps,

K_p is a scaling factor for an SSB frequency layer to be measured without measurement gaps. $K_p = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

For a window W of duration max(SMTC period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the SSB frequency layer, and starting at the beginning of any SMTC occasion:

N_{total} is the total number of SMTC occasions within the window, including those overlapped with MG occasions within the window, and

$N_{available}$ is the number of SMTC occasions that are not overlapped with any MG occasion within the window W, after accounting for MG collisions by applying the selected gap collision rule provided that concurrent measurement gaps are configured.

$K_p = 1$ when $N_{available} = 0$.

Otherwise, when UE is not configured with or UE does not support concurrent measurement gaps:

When inter-frequency SMTC is fully non overlapping with measurement gaps or inter-frequency SMTC is fully overlapping with MGs, $K_p = 1$.

When inter-frequency SMTC is partially overlapping with measurement gaps, $K_p = 1/(1- (\text{SMTC period} /\text{MGRP}))$, where SMTC period < MGRP. When inter-frequency SMTC is partially overlapping with the VIL of NCSG, $K_p = 1/(1- (\text{SMTC period} /\text{VIRP}))$, where SMTC period < VIRP.

Inter-frequency measurements with measurement gaps:

K_{gap} is a scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. $K_{gap} = 1$ when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{gap} = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

- For a window W of duration max(SMTC period, MGRP_max), where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) within the same FR, and starting from the beginning of any SMTC occasion:
  - N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W, including those overlapped with other measurement gap occasions within the window, and
  - $N_{available}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W, after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in TS 38.133 [6] section 9.1.8.3.

K_{gap} is only applicable for UE supporting *concurrentMeasGap-r17*. When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{available} = 0$.

The normative reference for this requirement is TS 38.133 [6] clause 9.3.2, 9.3.4, 9.3.5, 9.3.6.3, 9.3.9.

6.6.18.0.3 Minimum conformance requirements for Inter-RAT measurement

The requirements are application for NR−E-UTRAN FDD and NR−E-UTRAN TDD when DRX is used or not.

When the UE requires measurement gaps to identify and measure inter-RAT cells and an appropriate measurement gap pattern is scheduled, or when the UE is capable of concurrent measurement gap patterns and concurrent measurement gap patterns are scheduled, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable FDD or TDD cell within the time period specified in TS 38.133 [6].

For a UE supporting and configured with concurrent measurement gaps, K_{gap_EUTRA}: it is the scaling factor for an E-UTRAN frequency layer to be measured within the associated measurement gap pattern. $K_{gap} = 1$ when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{gap_EUTRA} = N_{total} / N_{available}$ for UE configured with concurrent measurement gaps.

For a window W of duration MGRP_max, where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) for FR1, and starting from the beginning of any associated gap occasion:

N_{total} is the total number of associated gap occasions within the window, including those overlapped with other MG occasions within the window, and

$N_{available}$ is the number of non-dropped associated measurement gap occasions after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in TS 38.133 [6] section 9.1.8.3.

Requirements do not apply for UE configured with concurrent measurement gaps, if $N_{available}=0$

The normative reference for this requirement is TS 38.133 [6] clause 9.4.2, 9.4.3.

6.6.18.0.4 Minimum conformance requirements for PRS measurement

When physical layer receives last of *NR-TDOA-ProvideAssistanceData* message and *NR-TDOA-RequestLocationInformation* message from LMF via LPP specified in TS 37.355 [38], the UE shall be able to measure multiple (up to the UE capability specified in TS 38.133 [6] Clause 9.9.2.3) DL RSTD measurements, defined in TS 38.215 [10], during the measurement period defined in TS 38.133 [6] Clause 9.9.2.5

$K_{p,PRS,i}$ is a scaling factor for a positioning frequency layer to be measured within the associated measurement gap pattern, which is defined as $K_{p,PRS,i} = N_{total} / N_{available}$ for UE configured with concurrent measurement gap, and $K_{p,PRS,i} = 1$ for UE not configured with concurrent measurement gap.

- For a window W of duration max($T_{PRS,i}$, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the positioning frequency layer, and starting at the beginning of any associated gap occasions covering the PRS occasion:
  - N_{total} is the total number of associated gap occasions covering PRS occasions within the window, including those overlapped with other MG occasions within the window, and
  - $N_{available}$ is the number of non-dropped associated gap occasions covering PRS occasions within the window W, after further accounting for MG collisions by applying the selected gap collision rule
  - Requirements do not apply if $N_{available} =0$.

The normative reference for this requirement is TS 38.133 [6] clause 9.9.2.

6.6.18.1 NR SA FR1 event-triggered reporting for concurrent gaps non-overlap with SSB-based measurements in both inter-frequency layers

-

6.6.18.1.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting for concurrent gaps non-overlap with SSB-based measurement in both inter-frequency layers within inter-frequency cell search requirements in TS 38.133 [6] clause 9.3.4.

6.6.18.1.2 Test applicability

This test applies to all types of NR UEs supporting concurrent gap capability from release 17 onwards.

6.6.18.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.18.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.18.1.

6.6.18.1.4 Test description

6.6.18.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.18.1.4.1-1.

Table 6.6.18.1.4.1-1: Supported test configurations

Config	Description
6.6.18.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.18.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.18.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cells have the same SCS, BW and duplex mode as NR serving cells	

Test environment parameters are given in Table 6.6.18.1.4.1-2.

Table 6.6.18.1.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.18.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.		

1. The general test parameter settings are set up according to Table 6.6.18.1.4.1-3.
2. Message contents are defined in clause 6.6.18.1.4.3.
3. There are three NR carriers and three cells specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.6.18.1.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gaps with fully non-overlapping scenario for SSB-based measurements in both inter-frequency layers

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2, 3	Three FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cells 2 and 3	NR cell 2 is on NR RF channel number 2. NR cell 3 is on NR RF channel number 3.
Gap Pattern Id		Config 1,2,3	0 for MeasGapId #1 1 for MeasGapId #2	As specified in clause 9.1.2-1.

Measurement gap offset		Config 1,2,3	39 for MeasGapId #1 19 for MeasGapId #2		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cell 1		Config 1, 2, 3	3μs		Synchronous.
Time offset between serving and neighbour cell 2		Config 1, 2, 3	5ms		Asynchronous. The timing of Cell 3 is 5ms later than the timing of Cell 1.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.5	1.5	

6.6.18.1.4.2 Test procedure

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 (Cell 2) as neighbour cell 1 in FR1 on NR RF channel 2, and NR cell 3 (Cell 3) as neighbour cell 2 in FR1 on NR RF channel 3. The test parameters are given in Table 6.6.18.1.4.1-3 and Table 6.6.18.1.5-1 respectively.

Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #0 and #1 as defined in Table 6.6.18.1.4.1-3. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for RF channel numbers #2 and #3 respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used for both frequency layers. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.18.1.5-1.

3. SS shall transmit an *RRCReconfiguration* message to configure Event A3 triggered measurement report. Two concurrent per-UE measurement gap patterns are configured. MeasGapId #2 for NR cell 3 is configured with a higher priority than MeasGapId #1 for NR cell 2.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.18.1.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If Cell2's overall delays measured from the beginning of time period T2 is less than 920 ms, and Cell3's overall delays measured from the beginning of time period T2 is less than 1280 ms, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements, then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop. And set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.18.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.18.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ
Specific message contents exceptions for Cell 2	Table H.3.1-3 with conditions INTER-FREQ MO and Synchronous cells and MGe with MeasGapId-r17=1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Cell 3	Table H.3.1-3 with condition INTER-FREQ MO and MGe with MeasGapId-r17=2 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2

Table 6.6.18.1.4.3-2: MeasConfig (Step3)

Derivation path: Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod SEQUENCE {	3 entries		
MeasObjectToAddMod[1] SEQUENCE {		Entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTRA-FREQ MO	NR Cell 1	
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		Entry 2	
measObjectId	2		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTER-FREQ MO	NR Cell 2	
}			
}			
MeasObjectToAddMod[3] SEQUENCE {		Entry 3	
measObjectId	3		
measObject CHOICE {			

measObjectNR	MeasObjectNR-DEFAULT with condition INTER-FREQ MO	NR Cell 3	
}			
}			
}			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod SEQUENCE {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		Entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR-DEFAULT		
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod SEQUENCE {	2 entries		
MeasIdToAddMod[1] SEQUENCE {		Entry 1	
measId	1		
measObjectId	2	NR Cell 2	
reportConfigId	1		
}			
MeasIdToAddMod[2] SEQUENCE {		Entry 2	
measId	2		
measObjectId	3	NR Cell 3	
reportConfigId	1		
}			
}			
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	MeasGapConfig-Concurrent		
}			

Table 6.6.18.1.4.3-3: MeasGapConfig-Concurrent

Derivation path: Table H.3.1-6 with condition MGe			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	2 entry		
GapConfig-r17[1] SEQUENCE {		Entry 1	
measGapId-r17	1	NR Cell 2	
gapType-r17	perUE		
gapOffset-r17	39		
mgl-r17	ms6		
mgrp-r17	ms40		
mgta-r17	ms0		
gapPriority-r17	2		
}			
GapConfig-r17[2] SEQUENCE {		Entry 2	
measGapId-r17	2	NR Cell 3	
gapType-r17	perUE		
gapOffset-r17	19		
mgl-r17	ms6		
mgrp-r17	Ms80		
mgta-r17	ms0		
gapPriority-r17	1		
}			
}			
}			

6.6.18.1.5 Test requirement

Table 6.6.18.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.18.1.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gaps with fully non-overlapping scenario for SSB-based measurements in both inter-frequency layers

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD					
			Config 2,3	TDD					
TDD configuration			Config 1	Not Applicable					
			Config 2	TDDConf.1.1					
			Config 3	TDDConf.2.1					
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA		NA	
	Initial UL BWP			ULBWP.0.1		NA		NA	
	Dedicated DL BWP			DLBWP.1.1		NA		NA	
	Dedicated UL BWP			ULBWP.1.1		NA		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA		NA	
			Config 2	TRS.1.1 TDD		NA		NA	
			Config 3	TRS.1.2 TDD		NA		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD					
			Config 2	SR.1.1 TDD					
			Config 3	SR.2.1 TDD					
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD					
			Config 2	CR.1.1 TDD					
			Config 3	CR.2.1 TDD					
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD					
			Config 2	CCR.1.1 TDD					
			Config 3	CCR.2.1 TDD					
SSB parameters			Config 1,2,3	SSB.1 FR1		SSB.1 FR1		SSB.1 FR1	
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.2		SMTC.2		SMTC.2	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15					
			Config 3	30					
EPRE ratio of PSS to SSS			Config 1,2,3	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									

EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15kHz		-98		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98		-98	
		Config 3	-95		-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity	7
Io Note3	dBm/9.36 MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report for each neighbouring cell, with a measurement reporting delay less than 920 ms for cell 2 and 1280ms for cell 3 from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.18.2 NR SA FR1 event-triggered reporting for concurrent gaps partially-overlap with SSB-based measurements in both inter-frequency layers

-

6.6.18.2.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting for concurrent gaps partially-overlap with SSB-based measurement in both inter-frequency layers within inter-frequency cell search requirements in TS 38.133 [6] clause 9.3.4.

6.6.18.2.2 Test applicability

This test applies to all types of NR UEs supporting concurrent gap capability from release 17 onwards.

6.6.18.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.18.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.18.2.

6.6.18.2.4 Test description

6.6.18.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.18.2.4.1-1.

Table 6.6.18.2.4.1-1: Supported test configurations

Config	Description
6.6.18.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.18.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.18.2-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cells have the same SCS, BW and duplex mode as NR serving cells	

Test environment parameters are given in Table 6.6.18.2.4.1-2.

Table 6.6.18.2.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.18.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.		

1. The general test parameter settings are set up according to Table 6.6.18.2.4.1-3.

2. Message contents are defined in clause 6.6.18.2.4.3.

3. There are three NR carriers and three cells specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.6.18.2.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gap with partial overlapping scenario for SSB-based measurements in both inter-frequency layers

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2, 3	Three FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cells 2 and 3	NR cell 2 is on NR RF channel number 2. NR cell 3 is on NR RF channel number 3.
Gap Pattern Id		Config 1,2,3	0 for MeasGapId #1 1 for MeasGapId #2	As specified in clause 9.1.2-1.
Measurement gap offset	ms	Config 1,2,3	39 for MeasGapId #1 4 for MeasGapId #2	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	

TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cell 1		Config 1, 2, 3	3μs		Synchronous.
Time offset between serving and neighbour cell 2		Config 1, 2, 3	5ms		Asynchronous. The timing of Cell 3 is 5ms later than the timing of Cell 1.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.5	1.5	

6.6.18.2.4.2 Test procedure

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 (Cell 2) as neighbour cell 1 in FR1 on NR RF channel 2, and NR cell 3 (Cell 3) as neighbour cell 2 in FR1 on NR RF channel 3. The test parameters are given in Table 6.6.18.2.4.1-3, and Table 6.6.18.2.5-1 respectively. The TE schedules continuous DL data on PCell throughout the test.

Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #0 and #1 as defined in Table 6.6.18.2.4.1-3. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for RF channel numbers #2 and #3, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used for both frequency layers. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.18.2.5-1.

3. The SS shall transmit an *RRCReconfiguration* message to configure Event A3 triggered measurement report. Two concurrent per-UE measurement gap patterns are configured. MeasGapId #2 for NR cell 3 is configured with a higher priority than MeasGapId #1 for NR cell 2.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission in Cell 1.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.18.2.5-1. T2 starts.

7. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1280 ms for both Cell 2 and Cell 3, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

8. After the SS receives the *MeasurementReport* message in step 7 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

9. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop. And set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

10. Depending on the choice in Step 8, the SS:

    - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with UE-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure

parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
OR:
- if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.18.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.18.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ
Specific message contents exceptions for Cell 2	Table H.3.1-3 with conditions INTER-FREQ MO and Synchronous cells and MGe with MeasGapId-r17=1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Cell 3	Table H.3.1-3 with condition INTER-FREQ MO and MGe with MeasGapId-r17=2 Table 7.3.1-3 in TS 38.508-1 [14] with condition [SMTC.Y]

Table 6.6.18.2.4.3-2: MeasConfig (Step3)

Derivation path: Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod SEQUENCE {	3 entries		
MeasObjectToAddMod[1] SEQUENCE {		Entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTRA-FREQ MO	NR Cell 1	
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		Entry 2	
measObjectId	2		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTER-FREQ MO	NR Cell 2	
}			
}			
MeasObjectToAddMod[3] SEQUENCE {		Entry 3	
measObjectId	3		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTER-FREQ MO	NR Cell 3	

} } }			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod SEQUENCE {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		Entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR-DEFAULT		
} } }			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod SEQUENCE {	2 entries		
MeasIdToAddMod[1] SEQUENCE {		Entry 1	
measId	1		
measObjectId	2	NR Cell 2	
reportConfigId	1		
}			
MeasIdToAddMod[2] SEQUENCE {		Entry 2	
measId	2		
measObjectId	3	NR Cell 3	
reportConfigId	1		
} }			
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	MeasGapConfig-Concurrent		
}			

Table 6.6.18.2.4.3-3: MeasGapConfig-Concurrent

Derivation path: Table H.3.1-6 with condition MGe			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	2 entry		
GapConfig-r17[1] SEQUENCE {		Entry 1	
measGapId-r17	1	NR Cell 2	
gapType-r17	perUE		
gapOffset-r17	39		
mgl-r17	ms6		
mgrp-r17	ms40		
mgta-r17	ms0		
gapPriority-r17	2		
}			
GapConfig-r17[2] SEQUENCE {		Entry 2	
measGapId-r17	2	NR Cell 3	
gapType-r17	perUE		
gapOffset-r17	4		
mgl-r17	ms6		
mgrp-r17	Ms80		
mgta-r17	ms0		
gapPriority-r17	1		
} } }			

6.6.18.2.5 Test requirement

Table 6.6.18.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.18.2.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gap with partial-overlapping scenario for SSB-based measurements in both inter-frequency layers

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD					
			Config 2,3	TDD					
TDD configuration			Config 1	Not Applicable					
			Config 2	TDDConf.1.1					
			Config 3	TDDConf.2.1					
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
			Config 3	40: $N_{RB,c}$ = 106					
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA		NA	
	Initial UL BWP			ULBWP.0.1		NA		NA	
	Dedicated DL BWP			DLBWP.1.1		NA		NA	
	Dedicated UL BWP			ULBWP.1.1		NA		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA		NA	
			Config 2	TRS.1.1 TDD		NA		NA	
			Config 3	TRS.1.2 TDD		NA		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD					
			Config 2	SR.1.1 TDD					
			Config 3	SR.2.1 TDD					
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD					
			Config 2	CR.1.1 TDD					
			Config 3	CR.2.1 TDD					
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD					
			Config 2	CCR.1.1 TDD					
			Config 3	CCR.2.1 TDD					
SSB parameters			Config 1,2,3	SSB.1 FR1		SSB.1 FR1		SSB.1 FR1	
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.2		SMTC.2		SMTC.7	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15					
			Config 3	30					
EPRE ratio of PSS to SSS			Config 1,2,3	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									

EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15kHz		-98		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98		-98	
		Config 3	-95		-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity	7
Io Note3	dBm/9.36 MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report for each neighbouring cell, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.18.3 NR SA FR1 NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1

6.6.18.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct event-triggered reporting of concurrent inter-RAT E-UTRAN and NR FR1 measurements when operating in standalone (SA) operation with PCell in FR1.

6.6.18.3.2 Test applicability

This test applies to all types of NR UEs supporting concurrent gap capability from release 17 onwards.

6.6.18.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.18.0.2 and 6.6.18.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.18.3.

6.6.18.3.4 Test description

6.6.18.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.18.3.4.1-1.

Table 6.6.18.3.4.1-1: Supported test configurations

Configuration	Description

6.6.18.3-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
6.6.18.3-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
6.6.18.3-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
6.6.18.3-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
6.6.18.3-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6.6.18.3-6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations.	

Test environment parameters are given in Table 6.6.18.3.4.1-2.

Table 6.6.18.3.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-4 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.18.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.		

1. The general test parameter settings are set up according to Table 6.6.18.3.4.1-3.

2. Message contents are defined in clause 6.6.18.3.4.3.

3. There are two NR carriers and one E-UTRA cell specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.6.18.3.4.1-3: General test parameters for NR SA FR1 NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		1 - 6	1, 2	2 NR carrier frequency is used in the test.
LTE RF Channel Number			3	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	1 - 6	As specified in Tables 6.6.18.3.5-1 and 6.6.18.3.5-2.	
Active cell		1 - 6	NR Cell 1 (PCell in FR1)	Cell 1 is on NR RF channel number 1
Neighbour cell 1		1 - 6	Cell 2 (NR FR1)	Cell 2 is on NR RF channel number 2
Neighbour cell 2		1 - 6	Cell 3 (LTE)	Cell 3 is on LTE RF channel number 3
Gap Pattern Id		1 - 6	1 for MeasGapId #1 1 for MeasGapId #2	As specified in TS 38.133 [6] Table 9.1.2-1. Per-UE gap pattern.
Measurement gap offset		1 - 6	19 for Gap pattern Id #1 39 for Gap pattern Id #2	
NR measurement quantity			SS-RSRP	Measurement quantity for Cell 1 and Cell 2
Inter-RAT E-UTRAN measurement quantity			RSRP	Measurement quantity for Cell 3
b2-Threshold1	dBm		As specified in Table 6.6.18.3.5-1	Absolute NR SS-RSRP threshold for SS-RSRP measurement on Cell 1 for event B2

b2-Threshold2EUTRA	dBm		-101	Absolute E-UTRAN RSRP threshold for SS-RSRP measurement on Cell 3 for event B2
Hysteresis	dB	1 - 6	0	
TimeToTrigger	s	1 - 6	0	
Filter coefficient		1 - 6	0	L3 filtering is not used
offsetMO	dB	1 - 6	6	NR Cell 2
a4-Threshold	dBm	1 - 6	-105	NR Cell 2
DRX			OFF	
Time offset between serving and neighbour cells		1, 4	3ms	Asynchronous cells NR cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs	Synchronous NR cells.
T1	s	1 - 6	5	for LTE Cell 3 and NR FR1 Cell 2
T2	s	1 - 6	5	for LTE Cell 3
			10.3 for PC1 and PC5; 6.5 for other PC	for NR FR1 Cell 2

6.6.18.3.4.2 Test procedure

In this test, there are three cells: Cell 1 is the NR PCell, Cell 2 is an Inter-frequency NR FR1 neighbour cell on NR RF channel 2 and Cell 3 is an inter-RAT E-UTRAN neighbour cell on LTE RF channel 3. The test parameters are given in Table 6.6.18.3.4.1-3 and Tables 6.6.18.3.5-1/2 respectively.

In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used for the E-UTRAN cell (cell 3). In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used for the NR FR1 cell (cell 2).

Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2 and Cell 3.

Two concurrent per-UE measurement gap pattern configurations # 0 as defined in Table 6.6.18.3.4.1-3 are provided for a UE. Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #1 as defined in Table 6.6.18.3.4.1-3. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for NR RF channel numbers #2 and LTE RF channel #3, respectively.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 6.6.18.3.5-1/2.

3. SS shall transmit an *RRCReconfiguration* message to configure Event A4 triggered measurement report for Cell 2, Event B2 triggered measurement report for Cell 3 to the PCell and two concurrent per-UE measurement gap patterns with MeasGapId #2 configured with a higher priority than MeasGapId #1.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Tables 6.6.18.3.5-1/2. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A4 and B2. If Cell2's overall delays measured from the beginning of period T2 is less than 10240 ms for UE supporting power class 1, or 6400 ms for UE supporting other power class, and Cell3's overall delays measured from the beginning of period T2 is less than 3.84 s, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements, then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

- switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop. And set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.18.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.18.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ, INTER-RAT and GAP NEEDED Table H.3.1-3A with conditions MGe with associatedMeasGap-r17 set to 1 Table H.3.1-4AA Table H.3.1-4A Table H.3.1-5 with condition INTER-RAT Table H.3.1-6 with conditions MGe Table H.3.1-7 with conditions INTER-FREQ and INTER-RAT
Specific message content exceptions for Test Configurations 6.6.18.3-1 and 6.6.18.3-4	Table H.3.1-3 with conditions INTER- FREQ MO and MGe with associatedMeasGapSSB-r17 set to 1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message content exceptions for Test Configurations 6.6.18.3-2, 6.6.18.3-3, 6.6.18.3-5 and 6.6.18.3-6	Table H.3.1-3 with conditions INTER- FREQ MO and Synchronous cells and MGe with associatedMeasGapSSB-r17 set to 1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.6.18.3.4.3-2: MeasConfig (Step 3)

Derivation path: Table H.3.1-2 with condition INTER-FREQ, INTER-RAT and GAP NEEDED			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod SEQUENCE {	3 entries		
MeasObjectToAddMod[1] SEQUENCE {		Entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTRA-FREQ MO	NR Cell 1	
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		Entry 2	

measObjectId	2		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTER-FREQ MO	NR Cell 2	
}			
}			
MeasObjectToAddMod[3] SEQUENCE {		Entry 3	
measObjectId	3		
measObject CHOICE {			
measObjectEUTRA	MeasObjectEUTRA-DEFAULT	E-UTRAN Cell 3	
}			
}			
}			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod SEQUENCE {	2 entries		
ReportConfigToAddMod[1] SEQUENCE {		Entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR-DEFAULT with condition EVENT_A4	NR Cell 2	
}			
}			
ReportConfigToAddMod[2] SEQUENCE {		Entry 2	
reportConfigId	2		
reportConfig CHOICE {			
reportConfigInterRAT	ReportConfigInterRAT-DEFAULT with condition EVENT_B2	E-UTRAN Cell 3	
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod SEQUENCE {	2 entries		
MeasIdToAddMod[1] SEQUENCE {		Entry 1	
measId	1		
measObjectId	2		
reportConfigId	1		
}			
MeasIdToAddMod[2] SEQUENCE {		Entry 2	
measId	2		
measObjectId	3		
reportConfigId	2		
}			
}			
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig			GAP NEEDED
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 SEQUENCE{	2 entries		
GapConfig-r17[1] SEQUENCE {		Entry 1	
measGapId-r17	1		MeasGapId #1
gapType-r17	perUE		
gapOffset-r17	19		MeasGapId #1
mgl-r17	ms6		MeasGapId #1
mgrp-r17	ms80		MeasGapId #1

mgta-r17	ms0		MeasGapId #1
refServCellIndicator-r17	Not present		
refFR2-ServCellAsyncCA-r17	Not present		
preConfigInd-r17	Not present		
ncsgInd-r17	Not present		
gapAssociationPRS-r17	Not present		
gapSharing-r17	Not present		
gapPriority-r17	2		
}			
}			
GapConfig-r17[2] SEQUENCE {		Entry 2	
measGapId-r17	2		MeasGapId #2
gapType-r17	perUE		
gapOffset-r17	39		MeasGapId #2
mgl-r17	ms6		MeasGapId #2
mgrp-r17	ms80		MeasGapId #2
mgta-r17	ms0		
refServCellIndicator-r17	Not present		
refFR2-ServCellAsyncCA-r17	Not present		
preConfigInd-r17	Not present		
ncsgInd-r17	Not present		
gapAssociationPRS-r17	Not present		
gapSharing-r17	Not present		
gapPriority-r17	1		
}			
}			
}			

6.6.18.3.5 Test requirement

Tables 6.6.18.3.5-1/2 define the primary level settings including test tolerances for all tests.

Table 6.6.18.3.5-1: Cell specific test parameters of NR cells for NR SA FR1 NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			1 - 6	1		2	
Duplex mode			1, 4	FDD			
			2, 3, 5, 6	TDD			
TDD Configuration			1, 4	NA			
			2, 5	TDDConf.1.1			
			3, 6	TDDConf.2.1			
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)			
			2, 5	10: $N_{RB,c}$ = 52 (TDD)			
			3, 6	40: $N_{RB,c}$ = 106 (TDD)			
BWP configuration	Initial DL BWP		1 - 6	DLBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
CSI-RS for tracking parameters on NR RF Channel 1			1, 4	TRS.1.1 FDD		-	
			2, 5	TRS.1.1 TDD			
			3, 6	TRS.1.2 TDD			
OCNG Patterns			1 - 6	OP.1			

PDSCH Reference measurement channel		1, 4	SR.1.1 FDD		-	
		2, 5	SR.1.1 TDD			
		3, 6	SR.2.1 TDD			
RMSI CORESET Reference Channel		1, 4	CR.1.1 FDD		-	
		2, 5	CR.1.1 TDD			
		3, 6	CR.2.1 TDD			
Dedicated CORESET Reference Channel		1, 4	CCR.1.1 FDD		-	
		2, 5	CCR.1.1 TDD			
		3, 6	CCR.2.1 TDD			
SMTC configuration		1, 4	SMTC.2		SMTC.2	
		2, 3, 5, 6	SMTC.1		SMTC.1	
SSB configuration		1, 4	SSB.1 FR1		SSB.1 FR1	
		2, 5	SSB.1 FR1		SSB.1 FR1	
		3, 6	SSB.2 FR1		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4 ,5	15			
		3, 6	30			
b2-Threshold1	dBm	1, 2, 4, 5	-81		-	
		3, 6	-78		-	
EPRE ratio of PSS to SSS	dB	1 - 6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} note2	dBm/15 KHz	1-6	-98			
N_{oc} note2	dBm/SCS	1, 2, 4, 5	-98			
		3, 6	-95			
$\hat{E}_s/N_{oc}$	dB	1 - 6	4	4	-Infinity	4
$\hat{E}_s/I_{ot}$ note3	dB	1 - 6	4	4	-Infinity	4
SSB_RP note3	dBm/SCS	1, 2, 4, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
Io note3	dBm/9.36 MHz	1, 2, 4, 5	-64.59	-64.59	-70.05	-64.59
	dBm/38.16 MHz	3, 6	-58.49	-58.49	-63.94	-58.49
Propagation condition		1 - 6	AWGN			
Antenna Configuration and Correlation Matrix		1 - 6	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Ês/Iot, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 6.6.18.3.5-2: Cell specific test parameters LTE cell for NR SA FR1 NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1

Parameter	Unit	Configuration	Cell 3	
			T1	T2
RF channel number		1 - 6	3	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1 - 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1 - 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1 - 6	-104	
$\hat{E}_s/N_{oc}$	dB	1 - 6	-Infinity	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1 - 6	-Infinity	17
RSRP[Note5]	dBm/15kHz	1 - 6	-Infinity	-87
SCH_RP[Note5]	dBm/15kHz	1 - 6	-Infinity	-87
Io[Note5]	dBm/9MHz	1 - 6	-76.22+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition		1 - 6	AWGN	
Antenna Configuration and Correlation Matrix		1 - 6	1x2 Low	

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
NOTE 2: DL RMCs and OCNG patterns are specified in sections A 3.1 and A 3.2 of TS 36.133 [23] respectively.
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 6: Propagation condition and correlation matrix are defined in section B.2 in TS 36.101 [27].

The UE shall send one Event A4 triggered measurement report for Cell 2, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1 and 5, or

6400 for UE supporting other power class.

The UE shall send one Event B2 triggered measurement report for Cell 3 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2.

The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.18.4 NR SA FR1 event triggered reporting tests for PRS and SSB measurement in FR1 without SSB time index detection when DRX is not used

6.6.18.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event.

6.6.18.4.2 Test applicability

This test applies to all types of NR UEs supporting concurrent gap and independent measurement gap configurations for PRS measurement capability from release 17 onwards.

6.6.18.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.18.0.2 and 6.6.18.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.18.4.

6.6.18.4.4 Test description

6.6.18.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.18.4.4.1-1.

Table 6.6.18.4.4.1-1: Supported test configurations

Configuration	Description
6.6.18.4-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.18.4-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.18.4-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Test environment parameters are given in Table 6.6.18.4.4.1-2.

Table 6.6.18.4.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.18.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.	

1. The general test parameter settings are set up according to Table 6.6.18.4.4.1-3.
2. Message contents are defined in clause 6.6.18.4.4.3.
3. There are three NR carriers specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.6.18.4.4.1-3: General test parameters for NR SA FR1 event triggered reporting tests for PRS and SSB measurement in FR1 without SSB time index detection when DRX is not used

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		1, 2, 3	1: Cell 1 and Cell 3 2: Cell 2	Two FR1 NR carrier frequencies are used for the NR cells.
Active cell		1, 2, 3	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	NR cell 2, NR cell 3	Cell 2 is an inter-frequency neighbour cell Cell 3 is an intra-frequency neighbour cell in the positioning assistance data.
Gap Pattern Id		1, 2, 3	0 for MeasGapId #1 24 for MeasGapId #2	
Measurement gap offset	ms	1, 2, 3	7 for MeasGapId #1 11 for MeasGapId #2	
A3-Offset	dB	1, 2, 3	-15	Value to ensure TT requirement satisified
Hysteresis	dB	1, 2, 3	0	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	µs	1, 2, 3	3	Synchronous cells.
Expected RSTD	µs	1, 2, 3	3	
Expected RSTD uncertainty	µs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

6.6.18.4.4.2 Test procedure

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as neighbour cell in FR1 on NR RF channel 2 and NR cell 3 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Table 6.6.18.4.4.1-3 and Table 6.6.18.4.5-1 respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3. Cell 1 and cell 3 transmit PRS during T2.

Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #0 and #24 as defined in Table 6.6.18.4.4.1-3. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for RF channel numbers #1 and #2, respectively.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 [38] shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance of MeasGapId #2 containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.18.4.5-1.

3. SS shall transmit an *RRCReconfiguration* message to configure Event A3 triggered measurement report and two concurrent per-UE measurement gap patterns with MeasGapId #2 configured with a higher priority than MeasGapId #1. One of concurrent gaps used for PRS measurement in same frequency layer of serving cells while the other concurrent gap in the different frequency layer of serving cells.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.18.4.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If Cell2's overall delays measured from the beginning of period T2 is less than 1840 ms, and report the PRS RSRP measurements for Cell 3 with respect to the reference cell in the DL-AoD assistance data, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements, then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop. And set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.18.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.18.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ and GAP NEEDED Table H.3.1-4 with A3-offset = -15dB Table H.3.1-5 Table H.3.1-6 with conditions MGeTable H.3.1-7 with condition INTER-FREQ for Cell 2 and condition INTRA-FREQ for Cell 3
Specific message contents exceptions for Test Configuration 6.6.1.8-1	Table H.3.1-3 with conditions INTER-FREQ MO and MGe with associatedMeasGapSSB-r17 set to 1 for Cell 2 and condition INTRA-FREQ MO and MGe with associatedMeasGapSSB-r17 set to 2 for Cell 3 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 6.6.1.8-2 and 6.6.1.8-3	Table H.3.1-3 with conditions INTER-FREQ MO and MGe with associatedMeasGapSSB-r17 set to 1 for Cell 2 and conditions INTRA-FREQ MO and MGe with associatedMeasGapSSB-r17 set to 2 for Cell 3 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.6.18.4.4.3-2: MeasConfig (Step 3)

Derivation path: Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod SEQUENCE {	2 entries		
MeasObjectToAddMod[1] SEQUENCE {		Entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTRA-FREQ MO	NR Cell 1 and Cell 3	
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		Entry 2	
measObjectId	2		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTER-FREQ MO	NR Cell 2	
}			
}			
}			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod SEQUENCE {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		Entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR-DEFAULT with condition EVENT_A3	NR Cell 2	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod SEQUENCE {	1 entry		
MeasIdToAddMod[1] SEQUENCE {		Entry 1	
measId	1		
measObjectId	2		
reportConfigId	1		
}			

}			
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig			GAP NEEDED
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 SEQUENCE{	2 entries		
GapConfig-r17[1] SEQUENCE{		Entry 1	MeasGapId #1
measGapId-r17	1		Pattern #0
gapType-r17	perUE		
gapOffset-r17	7		Pattern #0
mgl-r17	ms6		Pattern #0
mgrp-r17	ms40		Pattern #0
mgta-r17	ms0		Pattern #0
refServCellIndicator-r17	Not present		
refFR2-ServCellAsyncCA-r17	Not present		
preConfigInd-r17	Not present		
ncsgInd-r17	Not present		
gapAssociationPRS-r17	Not present		
gapSharing-r17	Not present		
gapPriority-r17	2		
}			
}			
GapConfig-r17[2] SEQUENCE{		Entry 2	MeasGapId #2
measGapId-r17	2		Pattern #24
gapType-r17	perUE		
gapOffset-r17	11		Pattern #24
mgl-r17	ms10		Pattern #24
mgrp-r17	ms80		Pattern #24
mgta-r17	ms0		
refServCellIndicator-r17	Not present		
refFR2-ServCellAsyncCA-r17	Not present		
preConfigInd-r17	Not present		
ncsgInd-r17	Not present		
gapAssociationPRS-r17	true		
gapSharing-r17	Not present		
gapPriority-r17	1		
}			
}			
}			

6.6.18.4.5 Test requirement

Tables 6.6.18.4.5-1 define the primary level settings including test tolerances for all tests.

Table 6.6.18.4.5-1: Cell specific test parameters of NR cells for NR SA FR1 event triggered reporting tests for PRS and SSB measurement in FR1 without SSB time index detection when DRX is not used

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
TDD configuration			1	N/A		N/A		N/A	
			2	TDDConf.1.1		TDDConf.1.1		TDDConf.1.1	
			3	TDDConf.2.1		TDDConf.2.1		TDDConf.2.1	
$BW_{channel}$		MHz	1, 2	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
			3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	1, 2	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
			3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		1, 2, 3	DLBWP.0.1		N/A		N/A	
	Initial UL BWP			ULBWP.0.1		N/A		N/A	

	Dedicated DL BWP			DLBWP.1.1		N/A		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A		N/A	
OCNG Patterns			1, 2, 3	OP.1		OP.1		OP.1	
PDSCH RMC configuration			1	SR.1.1 FDD		N/A		N/A	
			2	SR.1.1 TDD					
			3	SR.2.1 TDD					
RMSI CORESET RMC configuration			1	CR.1.1 FDD		N/A		N/A	
			2	CR.1.1 TDD		N/A		N/A	
			3	CR.2.1 TDD		N/A		N/A	
Dedicated CORESET RMC configuration			1	CCR.1.1 FDD		N/A		N/A	
			2	CCR.1.1 TDD		N/A		N/A	
			3	CCR.2.1 TDD		N/A		N/A	
SSB parameters			1	SSB.1 FR1		SSB.1 FR1		SSB.1 FR1	
			2	SSB.1 FR1		SSB.1 FR1		SSB.1 FR1	
			3	SSB.2 FR1		SSB.2 FR1		SSB.2 FR1	
SMTC configuration			1	SMTC.2		SMTC.2		SMTC.2	
			2	SMTC.1		SMTC.1		SMTC.1	
			3	SMTC.1		SMTC.1		SMTC.1	
TRS Configuration			1	TRS.1.1 FDD		N/A		N/A	
			2	TRS.1.1 TDD		N/A		N/A	
			3	TRS.1.2 TDD		N/A		N/A	
PRS configuration			1	PRS.1.4 FR1		N/A		PRS.1.4 FR1	
			2	PRS.1.4 FR1		N/A		PRS.1.4 FR1	
			3	PRS.2.4 FR1		N/A		PRS.2.4 FR1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	15					
			3	30					
PRS muting configuration			1, 2, 3	‘10’		‘01’		‘01’	
EPRE ratio of PSS to SSS			1, 2, 3	0		0		0	
EPRE ratio of PBCH DMRS to SSS			1, 2, 3						
EPRE ratio of PBCH to PBCH DMRS			1, 2, 3						
EPRE ratio of PDCCH DMRS to SSS			1, 2, 3						
EPRE ratio of PDCCH to PDCCH DMRS			1, 2, 3						
EPRE ratio of PDSCH DMRS to SSS			1, 2, 3						
EPRE ratio of PDSCH to PDSCH			1, 2, 3						
EPRE ratio of OCNG DMRS to SSS (Note 1)			1, 2, 3						
EPRE ratio of OCNG to OCNG DMRS (Note 1)			1, 2, 3						
N_{oc} Note2		dBm/15 kHz	1, 2, 3	-98		-98		-98	
N_{oc} Note2		dBm/SCS	1, 2	-98		-98		-98	
			3	-95		-95		-95	
SS-RSRP Note 3		dBm/SCS Note5	1, 2	-94	-94	-Infinity	-94	N/A	N/A
			3	-91	-91	-Infinity	-91	N/A	N/A
PRS-RSRP Note 3		dBm/SCS Note5	1, 2	-Infinity	-101	N/A	N/A	-Infinity	-108
			3	-Infinity	-98	N/A	N/A	-Infinity	-105
PRS $\hat{E}_s / I_{ot}$		dB	1, 2, 3	-Infinity	-3	N/A	N/A	-Infinity	-10
PRS $\hat{E}_s / N_{oc}$		dB	1, 2, 3	-Infinity	-3	N/A	N/A	-Infinity	-10
Io Note3		dBm/9.36 MHz	1, 2	-63.50		-70.05	-64.59	-63.50	
		dBm/38.16 MHz	3	-57.40		-63.94	-58.49	-57.40	
Propagation Condition			1, 2, 3	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP/PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report for cell 2, with a measurement reporting delay less than 1840 ms from the beginning of period T2.

The PRS RSRP measurement time fulfils the requirements specified in TS 38.133[6] Clause 9.9.3.5. The UE shall perform and report the PRS RSRP measurements for Cell 3 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in TS 38.133[6] section 9.9.3.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90% with a confidence level of 95%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in TS 38.133[6] Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

IUE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.19 SA event triggered reporting tests with NCSG

6.6.19.0 Minimum conformance requirements

6.6.19.0.1 Minimum conformance requirements for intra-frequency measurement

For the UE supporting NCSG, if NCSG is provided, the UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise, UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index.}$ The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 6.6.19.0.1-1 and 6.6.19.0.1-2 (deactivated Scell).

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 6.6.19.0.1-3 and 6.6.19.0.1-4 (deactivated Scell).

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to CSSFwithin_ncsg,i in TS 38.133 [6] clause 9.1.5.3 for measurement conducted within NCSG.

Table 6.6.19.0.1-1: Time period for PSS/SSS detection with NCSG (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, 5 x max(VIRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil($M2^{Note\ 1}$x 5) x max(VIRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x max(VIRP, DRX cycle) x $CSSF_{intra}$

NOTE 1: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1. NOTE 2: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *[intraRAT-MeasurementEnhancement-r16]* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.

Table 6.6.19.0.1-2: Time period for PSS/SSS detection with NCSG (deactivated SCell) (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	5 x max(measCycleSCell, VIRP) x $CSSF_{intra}$
DRX cycle≤ 320ms	5 x max(measCycleSCell, VIRP, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	5 x max(measCycleSCell, VIRP, DRX cycle) x $CSSF_{intra}$

Table 6.6.19.0.1-3: Measurement period for intra-frequency measurements with NCSG (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, 5 x max(VIRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5) x max(VIRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x max(VIRP, DRX cycle) x $CSSF_{intra}$

Table 6.6.19.0.1-4: Measurement period for intra-frequency measurements with NCSG (deactivated SCell) (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	5 x max(measCycleSCell, VIRP) x $CSSF_{intra}$
DRX cycle≤ 320ms	5 x max(measCycleSCell, VIRP, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	5 x max(measCycleSCell, VIRP, DRX cycle) x $CSSF_{intra}$

The requirements given above apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] sections 10.1.2 are fulfilled for a corresponding Band,
- SS-RSRQ related side conditions given in TS 38.133 [6] sections 10.1.7 are fulfilled for a corresponding Band,
- SS-SINR related side conditions given in TS 38.133 [6] sections 10.1.12 are fulfilled for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.2 for a corresponding Band.

The RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clauses 10.1.2.1.1 and 10.1.2.1.2, the RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clauses 10.1.7.1.1, and the SINR measurement accuracy for all measured cells shall be as specified in the TS 38.133 [6] clause 10.1.12.1.1.

Reported RSRP, RSRQ and SINR measurements contained in event triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.1.2.1.1, 10.1.2.1.2, 10.1.7.1.1 and 10.1.12.1.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay

uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify_intra_without_index}$ defined in TS 38.133 [6] section 9.2.7.1. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clauses 9.2.2, 9.2.4.2, 9.2.7.1, and 9.2.7.2.

6.6.19.0.2 Minimum conformance requirements for inter-frequency measurement

For the UE supporting NCSG, if NCSG is provided, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured) or *deriveSSB-IndexFromCellInter-r17* is configured. Otherwise, UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$.

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter}) \text{ ms}$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 6.6.19.0.2-1.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 6.6.19.0.2-2.

Table 6.6.19.0.2-1: Time period for PSS/SSS detection with NCSG (FR1)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	Max(600ms, 8 × Max(VIRP, SMTC period)) × CSSFinter
DRX cycle ≤ 320ms	Max(600ms, Ceil(8*1.5) × Max(VIRP, SMTC period, DRX cycle)) × CSSFinter
DRX cycle > 320ms	8 × DRX cycle × CSSFinter
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 6.6.19.0.2-2: Measurement period for inter-frequency measurements with NCSG (FR1)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	Max(200ms, 8 × Max(VIRP, SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 320ms	Max(200ms, Ceil(8 × 1.5) × Max(VIRP, SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320ms	8 × DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

When NCSG are provided for inter frequency measurements, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in TS 38.133 [6] clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 6.6.19.0.2-2.

For UE supporting *nr-NeedForGapNCSG-reporting-r17* and indicating *NeedForGapNCSG-InfoNR* for inter-frequency measurement,

- An inter-frequency SSB measurement is defined as measurement with NCSG if
  - the UE indicates 'ncsg' via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement, and
  - the SSB is not completely contained in the active BWP of the UE

  When network configures NCSG, the delay requirements are specified in TS 38.133 [6] clause 9.3.10.
- For inter-frequency SSB based measurements with NCSG, UE may cause scheduling restriction as specified in TS 38.133 [6] clause 9.3.10.3.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] clauses 10.1.4 and 10.1.5 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in TS 38.133 [6] clauses 10.1.9 and 10.1.10 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in TS 38.133 [6] clauses 10.1.14 and 10.1.15 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.3 for a corresponding Band.

The normative reference for this requirement is TS 38.133 [6] clause 9.3.2, 9.3.6.3, and 9.3.10.

6.6.19.0.3 Minimum conformance requirements for inter-RAT measurement

The requirements are application for NR−E-UTRAN RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN cell is considered to be detectable when:

- RSRP related conditions in the accuracy requirements in TS 38.133 [6] Section 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],
- RSRQ related conditions in the accuracy requirements in TS 38.133 [6] Section 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],
- RS-SINR related conditions in the accuracy requirements in TS 38.133 [6] Section 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [23].

For UE supporting *eutra-NeedForGapNCSG-reporting-r17* and indicating *NeedForGapNCSG-InfoEUTRA* for inter-RAT measurement,

- An inter-RAT measurement is defined as measurement with NCSG if
  - the UE indicates ‘ncsg’ via *NeedForGapNCSG-InfoEUTRA* for the inter-RAT measurement

When network configures measurement gap or NCSG, the delay requirements are specified in TS 38.133 [6] clause 9.4.2 and 9.4.3.

Parameter T_{Inter1} used in inter-RAT requirements in TS 38.133 [6] clause 9.4 is specified in Table 6.6.19.0.3-1 when NCSG is used.

Table 6.6.19.0.3-1: Minimum available time for inter-RAT measurements when NCSG is configured

NCSG Pattern Id	Measurement Length (ML, ms)	Visible Interruption Repetition Period (VIRP, ms)	Minimum available time for inter-frequency and inter-RAT measurements during 480 ms period (Tinter1, ms)
0	5	40	60
1	5	80	30
2	2	40	24 Note 1
3	2	80	12 Note 1
4	5	20	120 Note 1
6	3	20	72 Note 1,3
7	3	40	36 Note 1,3
8	3	80	18 Note 1,3
10	2	20	48 Note 1

NOTE 1:	When determining UE requirements using Tinter1 for NCSG pattern IDs 2, 3, 4, 6, 7, 8, 10, Tinter1 = 60 for NCSG pattern IDs 2, 4, 6, 7, 10, and Tinter1 = 30 for NCSG pattern IDs 3 and 8 shall be used.
NOTE 2:	NCSG pattern configurations applicability is as specified in Table 9.1.2C-1.
NOTE 3:	This NCSG pattern is applicable for E-UTRA inter-frequency measurements only if NCSG based NR measurements are also configured.

The normative reference for this requirement is TS 38.133 [6] clauses 9.4.2, 9.4.3.

6.6.19.0.4 Minimum conformance requirements for interruptions

It is up to UE implementation whether or not the UE is able to conduct transmission in the following slot(s),

- when *mgta* is not applied, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the last each of the interrupted slots after VIL1 and VIL2.

where UL slot denotes that all the symbols in the slot are uplink symbols, and L=1 if $(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_{\mathrm{c}}$ for the UL transmission is less than the length of one slot; L=2 otherwise.

Note: Network is supposed to take into account the possible difference between the estimated TA at network and actual TA at UE when scheduling UE in the above slot(s).

The interruptions of NCSG in number of slots are listed in Table 6.6.19.0.4-1 on all serving cells when per-UE NCSG is configured or on FR1 serving cells when per-FR FR1 NCSG is configured to *ncsg-MeasGapPerFR-r17* capable UE. There are two interruptions in each NCSG occasion, VIL1 before ML and VIL2 after ML, in NR standalone (with single carrier or NR CA). Each of them has number of interrupted slots captured in Table 6.6.19.0.4-1.

Table 6.6.19.0.4-1: Number of interrupted slots on all serving cells for per-UE NCSG or FR1 serving cells for FR1 NCSG during each VIL in NR standalone operation (with single carrier, NR CA)

NR SCS (kHz)	Number of interrupted slots on serving cells When MG timing advance of 0ms is applied VIL=1ms
15	1
30	2
60	4
120	8
NOTE 1:	NR SCS of 120 kHz is only applicable to the case with per-UE NCSG.
NOTE 2:	Void

6.6.19.1 NR SA FR1 event-triggered reporting tests with NCSG under non-DRX in FR1

6.6.19.1.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in 38.133 [6] clauses 9.2.7.1 and 9.2.7.2, and also verify the scheduling availability during intra-frequency measurement with NCSG in 38.133 [6] clause 9.2.7.3.

6.6.19.1.2 Test applicability

This test applies to all types of NR UE from release 17 onwards supporting CSI-RS-based RLM, BWP operation without bandwidth restriction and NR NCSG capability. The UE is capable of NCSG and report '*ncsg*' through *NeedForGapNCSG-InfoNR* for PCell. Test 1 is applicable to UEs not supporting per-FR NCSG (ncsg-MeasGapPerFR-r17, as defined in TS 38.306 [11]) and Test 2 is applicable only to UEs supporting per-FR NCSG.

6.6.19.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.19.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.19.1.

6.6.19.1.4 Test description

6.6.19.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.19.1.4.1-1.

Table 6.6.19.1.4.1-1: Supported test configurations for NR PCell

Config	Description
6.6.19.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.19.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.19.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cells have the same SCS, BW and duplex mode as NR serving cells	

Test environment parameters are given in Table 6.6.19.1.4.1-2.

Table 6.6.19.1.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.19.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.19.1.4.1-3.

2. Message contents are defined in clause 6.6.19.1.4.3.

3. Two cells are deployed in the test, which are FR1 PCell(Cell 1) and FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 6.6.19.1.4.1-3: General test parameters for SA intra-frequency event triggered reporting for FR1 with NCSG

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3	Cell 1		
Neighbour cell		1, 2, 3	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2		
NCSG type		1, 2, 3	Per-UE	Per-FR	Per-FR NCSG pattern is configured if UE support per-FR NCSG; otherwise, per-UE NCSG patter is configured.
NCSG pattern		1, 2, 3	0	2	
Visible interruption repetition periodicity	ms	1, 2, 3	40	40	
Measurement length	ms	1, 2, 3	5	2	
NCSG offset	ms	1, 2, 3	39	39	
SSB configuration		1	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.2 FR1		
SMTC configuration		1	SMTC.2		

		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX	ms	1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	1	

6.6.19.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The PCell shall continuously scheduled with data in the DL starting from T2 until the UE has sent the measurement report during T2. The test parameters are given in Table 6.6.19.1.4.1-3 and Table 6.6.19.1.5-1 respectively.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.19.1.5-1.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.19.1.5-1. T2 start.

6. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

7. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 802ms and DTX in PCell is not observed by the SS for the corresponding PDSCH scheduled in PCell in all the slots expect for the case where PDSCH or PUCCH is overlapped with VIL of NCSG pattern then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or DTX in PCell is observed by the SS except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern, then the number of failure tests is increased by one.

8. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

9. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

10. Depending on the choice in Step 8, the SS:
    - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.19.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.19.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.2 and MGe with associatedMeasGapSSB-r17=1 for configuration 6.6.19.1-1 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC.1, MGe with associatedMeasGapSSB-r17=1 and synchronous cells for configuration 6.6.1.19-2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC.1, MGe with associatedMeasGapSSB-r17=1 and synchronous cells for configuration 6.6.1.19- 3 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM

Table 6.6.19.1.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 configuration	
}			

firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

Condition	Explanation
BWP-Id1	Active BWP (BWP2)

Table 6.6.19.1.4.3-3: MeasGapConfig(Step 3)

Derivation Path: Table H.3.1-6 with condition MGe and NCSG			
Information Element	**Value/remark**	**Comment**	**Condition**
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	1 entry		
GapConfig-r17 SEQUENCE {			
measGapId-r17	1		
gapType-r17	perUE		Test1
	perFR1		Test2
gapOffset-r17	39		
mgl-r17	ms5		Test1
	ms2		Test2
mgrp-r17	ms40		
mgta-r17	ms0		
ncsgInd-r17	true		
}			

6.6.19.1.5 Test requirement

Table 6.6.19.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.19.1.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting with NCSG for PCell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.1	

RLM-RS		1, 2, 3	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to NR Cell2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured shall be less than a total of 802ms in this test case (note: this gives a total of 800ms for measurement reporting delay plus 2ms for TTI insertion uncertainty)

The UE shall be scheduled on PCell continuously throughout the test. From the start of T2 until the measurement report is received during T2, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern

For a test to be considered successful requirements on both Event A3 detection and 100% of all expected ACK/NACKs have to be fulfilled simultaneously.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

6.6.19.2 NR SA FR1 event-triggered reporting tests for FR1 with NCSG for inter-frequency measurement

6.6.19.2.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell identification and measurement period requirements in 38.133 [6] clauses 9.3.10.1 and 9.3.10.2, and also verify the scheduling availability during inter-frequency measurement with NCSG in 39.133 [6] clause 9.3.10.3.

6.6.19.2.2 Test applicability

This test applies to all types of NR UEs supporting NR NCSG capability from release 17 onwards. Test 1 is applicable to UEs not supporting per-FR NCSG (*ncsg-MeasGapPerFR-r17*, as defined in TS 38.306 [11]) and Test 2 is applicable only to UEs supporting per-FR NCSG. The serving frequency and the target frequency should be selected such that UE reports 'ncsg' for the target frequency given the serving frequency.

6.6.19.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.19.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.19.2.

6.6.19.2.4 Test description

6.6.19.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.19.2.4.1-1.

Table 6.6.19.2.4.1-1: Supported test configurations

Config	Description
6.6.19.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.19.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.19.2-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cells have the same SCS, BW and duplex mode as NR serving cells	

Test environment parameters are given in Table 6.6.19.2.4.1-2.

Table 6.6.19.2.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.19.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.		

1. The general test parameter settings are set up according to Table 6.6.19.2.4.1-3.

2. Message contents are defined in clause 6.6.19.2.4.3.

3. There are two NR cells on two carriers specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 6.6.19.2.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 with NCSG

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies is used.

Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2.
NCSG Pattern Id		Config 1,2,3	0	2	
NCSG offset		Config 1,2,3	9		
SMTC-SSB parameters		Config 1	SSB.1 FR1		
		Config 2	SSB.1 FR1		
		Config 3	SSB.2 FR1		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1		

6.6.19.2.4.2 Test procedure

Two cells are deployed in the test: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell2 as neighbour cell in FR1 on NR RF channel 2. NR RF channel 1 and NR RF channel 2 should be selected such the UE reports 'ncsg' for the target frequency on NR RF channel 2. The test parameters are given in Table 6.6.19.2.4.1-3 and Table 6.6.19.2.5-1 respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used for both frequency layers. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.19.2.5-1.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.19.2.5-1. T2 starts.

6. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

7. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 922ms and DTX in PCell is not observed by the SS for the corresponding PDSCH scheduled in PCell in all the slots expect for the case where PDSCH or PUCCH is overlapped with VIL of NCSG pattern, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or DTX in PCell is observed by the SS except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern, then the number of failure tests is increased by one.

8. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

- switch the UE off.

9. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

10. Depending on the choice in Step 8, the SS:
- if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
OR
- if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.19.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.19.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1, SMTC.5 and MGe with associatedMeasGapSSB-r17=1 for configuration 6.6.19.2-1 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1, SMTC.4, MGe with associatedMeasGapSSB-r17=1 and synchronous cells for configuration 6.6.19.2-2 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.2 FR1, SMTC.4, MGe with associatedMeasGapSSB-r17=1 and synchronous cells for configuration 6.6.19.2-3 Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ

Table 6.6.19.2.4.3-2: MeasGapConfig(Step 3)

Derivation Path: Table H.3.1-6 with condition MGe and NCSG			
Information Element	**Value/remark**	**Comment**	**Condition**
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	1 entry		
GapConfig-r17[1] SEQUENCE {			
measGapId-r17	1		
gapType-r17	perUE		Test1
	perFR1		Test2
gapOffset-r17	9		
mgl-r17	ms5		Test1
	ms2		Test2
mgrp-r17	ms40		
mgta-r17	ms0		
ncsgInd-r17	true		
}			

6.6.19.2.5 Test requirement

Table 6.6.19.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.19.2.5-1: Cell specific test parameters for SA event triggered reporting for FR1 with NCSG for inter-frequency measurement

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD			
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							

EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report to NR Cell2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured shall be less than a total of 922ms in this test case (note: this gives a total of 920ms for measurement reporting delay plus 2ms for TTI insertion uncertainty)

The UE shall be scheduled on PCell continuously throughout the test. From the start of T2 until the measurement report is received during T2, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern

For a test to be considered successful requirements on both Event A3 detection and 100% of all expected ACK/NACKs have to be fulfilled simultaneously.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%

6.6.19.3 NR SA FR1 NR - E-UTRAN event-triggered reporting in non-DRX in FR1 with NCSG

6.6.19.3.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct event-triggered reporting of inter-RAT E-UTRAN measurements based on NCSG when operating in standalone (SA) operation with PCell in FR1.

6.6.19.3.2 Test applicability

This test applies to all types of NR Release 17 and forward supporting 5GS NR SA FR1, E-UTRAN and NCSG capability for E-UTRAN from release 17 onwards. The serving frequency and target frequency should be selected such that UE reports 'ncsg' for the target frequency given the serving frequency.

6.6.19.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.19.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.19.3.

6.6.19.3.4 Test description

6.6.19.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.19.3.4.1-1.

Table 6.6.19.3.4.1-1: Supported test configurations

Config	Description
6.6.19.3-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
6.6.19.3-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
6.6.19.3-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
6.6.19.3-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
6.6.19.3-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6.6.19.3-6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Test environment parameters are given in Table 6.6.19.3.4.1-2.

Table 6.6.19.3.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.19.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 6.6.19.3.4.1-3.
2. Message contents are defined in clause 6.6.19.3.4.3.
3. There are one NR carriers and one E-UTRAN cell specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 6.6.19.3.4.1-3: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables 6.6.19.3.5-1 and 6.6.19.3.5-2.	
Active cell		Cell 1	Cell 1 is on NR RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on LTE RF channel number 2
NCSG Pattern Id		0	As specified in TS 38.133[6] Table 9.1.9.3-1.
NCSG offset	ms	39	
NCSG mgta	ms	0	
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2

b2-Threshold1	dBm	As specified in Table 6.6.19.3-5-1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	

6.6.19.3.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 2. The test parameters are given in Table 6.6.19.3.4.1-3, Table 6.6.19.3.5-1 and Table 6.6.19.3.5-2 respectively.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.19.3.5-1.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. T1 starts, SS continuously schedules on PCell with data in the DL starting from T1 and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.19.3.5-1. T2 starts.

7. UE shall transmit a *MeasurementReport* message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 3842ms and DTX in PCell is not observed by the SS for the corresponding PDSCH scheduled in PCell in all the slots expect for the case where PDSCH or PUCCH is overlapped with VIL of NCSG pattern then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or DTX in PCell is observed by the SS except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern, then the number of failure tests is increased by one.

8. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

9. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.

10. Depending on the choice in Step 8, the SS:
    - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.19.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.19.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-RAT Table H.3.1-3A with condition MGe with associatedMeasGap-r17=1 Table H.3.1-4A Table H.3.1-3 with condition SMTC.1, SSB.1 FR1 for configuration 6.6.19.3-1 and 6.6.19.3-4 Table H.3.1-3 with condition SMTC.1, SSB.1 FR1 and synchronous cells for configuration 6.6.19.3-2 and 6.6.19.3-5 Table H.3.1-3 with condition SMTC.1, SSB.2 FR1 and synchronous cells for configuration 6.6.19.3-3 and 6.6.19.3-6 Table H.3.1-5 with conditions INTER-RAT Table H.3.1-7 with condition INTER-RAT

Table 6.6.19.3.4.3-2: MeasGapConfig(Step 3)

Derivation Path: Table H.3.1-6 with condition MGe and NCSG		
Information Element	**Value/remark**	**Comment**
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	1 entry	
GapConfig-r17[1] SEQUENCE {		
measGapId-r17	1	
gapOffset-r17	39	
mgl-r17	ms5	
mgrp-r17	ms40	
mgta-r17	ms0	
ncsgInd-r17	true	
}		

6.6.19.3.5 Test requirement

Table 6.6.19.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.19.3.5-1: PCell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 2, 3	FDD	
			4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	

			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5	-104	
			3, 6	-101	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	17.55	-1.55
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6	17.55	-1.55
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5	-86.45	-105.55
			3, 6	-83.44	-102.55
SSB_RP[Note3]		dBm/SCS	1, 2, 4, 5	-86.45	-105.55
			3, 6	-83.44	-102.55
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-58.42	-73.74
		dBm/38.16 MHz	3, 6	-52.32	-67.64
Propagation condition			1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.6.19.3.5-2: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	

TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	18.55
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	-Infinity	18.55
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-85.45
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-85.45
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-76.21	-57.6
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 6: Propagation condition and correlation matrix are defined in section B.2 in TS 36.101 [27].

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3842ms from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The overall delays measured shall be less than a total of 3842 ms in this test case (note: this gives a total of 3840 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty).

The UE shall be scheduled on PCell continuously throughout the test. From the start of T1 until the measurement report is received during T2, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

For a test to be considered successful requirements on both Event B2 detection and 100% of all expected ACK/NACKs have to be fulfilled simultaneously.

The rate of correct events observed during repeated tests shall be at least 90% with confidence level of 95%

6.6.19.4 NR SA FR1 Event triggered reporting on SCC with deactivated SCell test with per-UE NCSG under non-DRX

6.6.19.4.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting for NCSG with SSB-based measurement with deactivated SCELL.

6.6.19.4.2 Test applicability

This test applies to all types of NR UEs supporting NR NCSG capability from release 17 onwards supporting 2DL CA.

6.6.19.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.19.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.19.4.

6.6.19.4.4 Test description

6.6.19.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for NR PCell are shown in Table 6.6.19.4.4.1-1. Supported test configurations for NR SCell are shown in Table 6.6.19.4.4.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently.

Table 6.6.19.4.4.1-1: Supported test configurations for NR PCell

Config	Description
6.6.19.4-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.19.4-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.19.4-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Table 6.6.19.4.4.1-1A: Supported test configurations for NR SCell

$Config_{SCell}$	Description
6.6.19.4-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.19.4-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.19.4-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration,	

Test environment parameters are given in Table 6.6.19.4.4.1-2.

Table 6.6.19.4.4.1-2: Test environment parameters

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.	

Channel bandwidth	As specified by the test configuration selected from Table 6.6.19.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 6.6.19.4.4.1-3.

2. Message contents are defined in clause 6.6.19.4.4.3.

3. Three cells are deployed in the test, which are FR1 PCell (Cell 1), FR1 SCell (Cell2) and FR1 neighbour cell (Cell3) on the same frequency as the SCell. Cell 1 and Cell 2 shall be configured according to Annex C.1.1 and C.1.2.

Table 6.6.19.4.4.1-3: General test parameters for event triggered reporting on SCC with deactivated SCell with per-UE NCSG for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Configured deactivated SCell		1, 2, 3	Cell 2	
Neighbour cell		1, 2, 3	Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1	
RF Channel Number		1, 2, 3	2: Cell 2 and Cell 3	
Measurement gap type		1, 2, 3	Per-UE NCSG	
NCSG pattern		1, 2, 3	ID # 0	
MGTA	ms	1, 2, 5	0	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A6-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
SCell measurement cycle (measCycleSCell)	ms	1, 2, 3	160	
Cell 2 timing offset to Cell 1	µs	1, 2, 3	0	
Time alignment error between Cell 2 and Cell 1	µs	1, 2, 3	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
Cell 3 timing offset to Cell 1	µs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

6.6.19.4.4.2 Test procedure

Three cells are deployed in the test, which are FR1 PCell(Cell1), FR1 SCell(Cell2) and FR1 neighbour cell(Cell3) on the same frequency as the SCell. The SCell is deactivated during the test. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered with Event A6 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 3. The PCell shall continuously

scheduled with data in the DL starting from T1 until the UE has sent the measurement report during T2. The test parameters are given in Table 6.6.19.4.4.1-3 and Table 6.6.19.4.5-1 respectively.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.19.4.5-1.

3. SS shall configure SCell (Cell2) on the SCC as per TS 38.508-1[14] clause 7.5.1 and provide measurement configurations.

4. T1 starts, SS continuously schedules on PCell with data in the DL starting from T1 and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.19.4.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A6. If the overall delays measured from the beginning of time period T2 is less than 1602 ms and DTX in PCell is not observed by the SS for the corresponding PDSCH scheduled in PCell in all the slots expect for the case where PDSCH or PUCCH is overlapped with VIL of NCSG pattern, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or DTX in PCell is observed by the SS except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern, then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.19.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.19.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions Deactivated SCell Table H.3.1-5 Table H.3.1-7 with condition Deactivated SCell

Table 6.6.19.4.4.3-2: ServingCellConfig (Cell 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
servingCellMO	2	MeasObjectId for SCell in Table H.3.1-2	
}			

Table 6.6.19.4.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		Configuration 6.6.19.4-2 and 6.6.19.4-3
	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		Configuration 6.6.19.4-1
measCycleSCell-v1530	sf160		
associatedMeasGapSSB-r17	1		
}			

Table 6.6.19.4.4.3-4: ReportConfigNR(Step 3)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition EVENT_A6			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA6 SEQUENCE {			
a6-Offset CHOICE {			
rsrp	-9	The actual value is field value * 0.5 dB.	
}			
hysteresis	0		
timeToTrigger	ms0		
}			
}			
}			
}			
}			

Table 6.6.19.4.4.3-5: MeasGapConfig(Step 3)

Derivation Path: Table H.3.1-6 with condition MGe and NCSG		
Information Element	**Value/remark**	**Comment**
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	1 entry	

GapConfig-r17[1] SEQUENCE {		
measGapId-r17	1	
gapOffset-r17	39	
mgl-r17	ms5	
mgrp-r17	ms40	
mgta-r17	ms0	
ncsgInd-r17	true	
}		

6.6.19.4.5 Test requirement

Table 6.6.19.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.19.4.5-1: NR Cell specific test parameters for event triggered reporting on SCC with deactivated SCell with per-UE NCSG for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
TDD configuration		1	N/A		N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A		N/A	
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A		N/A	
		2	CR.1.1 TDD		N/A		N/A	
		3	CR.2.1 TDD		N/A		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A		N/A	
		2	CCR.1.1 TDD		N/A		N/A	
		3	CCR.2.1 TDD		N/A		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		TRS.1.1 FDD			
		2	TRS.1.1 TDD		TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1		N/A	
N_{oc} Note 2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note 2	dBm/15 kHz	1, 2, 3	-98					
$\hat{E}_s/I_{ot}$	dB	1, 2, 3	4	4	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	4	4	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-94	-94	-Infinity	-94
		2	-94	-94	-94	-94	-Infinity	-94
		3	-91	-91	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-64.60	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-64.60	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-58.50	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3	AWGN					

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A6 triggered measurement report to NR Cell3. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured shall be less than a total of 1602ms in this test case (note: this gives a total of 1600ms for measurement reporting delay plus 2ms for TTI insertion uncertainty)

The UE shall be scheduled on PCell continuously throughout the test. From the start of T1 until the measurement report is received during T2, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

For a test to be considered successful requirements on both Event A6 detection and 100% of all expected ACK/NACKs have to be fulfilled simultaneously.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

6.6.20 UE Rx-Tx time difference measurement for propagation delay compensation

6.6.20.0 Minimum conformance requirements

When UE is configured with *prs-Ref-r17* in *MeasObjectRxTxDiff*-r17 defined in TS 38.331 [2] and provided with PRS resource configuration, the UE shall be able to measure UE Rx-Tx time difference on PCell within the measurement period $T_{UERx-Tx_PRS}$, where:

$$T_{UERxTx,PRS} = \left\lceil \frac{N_{PRS}^{slot}}{N'} \right\rceil * N_{sample} * K_{layer3} * LCM(T_{PRS}, T_{DRX})$$

Where:

N_{PRS}^{slot} is the maximum number of DL PRS resources configured in a slot,

N' is UE capability for number of DL PRS resources that it can process in a slot corresponding to *maxNumberPRS-ResourceProcessedPerSlot-r17* as specified in TS38.331 [2],

N_{sample} is the number of UE Rx-Tx time difference measurement samples and N_{sample} = 4,

T_{PRS} is the PRS resource periodicity specific for RTT-based propagation delay compensation,

T_{DRX} is the DRX cycle length when DRX is in use, 1ms otherwise.

K_{layer3} is

N_{total} / $N_{available}$, when $N_{available}$>0

Where,

- For a window W of duration LCM(T_{PRS}, MGRP_max, T_{SMTC}) and starting at the beginning of any PRS resource occasion, where T_{SMTC} is the periodicity of SMTC for intra-frequency measurement without gap, and MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as PCell for a UE supporting *concurrentMeasGap-r17* and is configured with concurrent measurement gaps, otherwise MGRP max is the MGRP of configured per-UE measurement gap or per-FR measurement gap within the same FR as PCell:

- N_{total} is the total number of PRS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
- $N_{available}$ is the number of PRS resource occasions that are not overlapped with:
  - For FR1: any measurement gap occasions within window W. And for a UE supporting *concurrentMeasGap-r17* after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 within the window W

No requirements shall apply if $N_{available}$=0.

UE is only required to perform UE Rx-Tx time difference on PRS within the active DL BWP.

When UE is configured to perform UE Rx-Tx time difference measurement based on PRS, the requirements apply provided that the SCS of the PRS is same as that of the active BWP on PCell.

If PRS resources overlap with Type 1A/1B/2 PPW, the UE is allowed longer measurement period to measure UE Rx-Tx time difference on PCell.

The UE Rx-Tx time difference measurement values contained in measurement report shall be based on the

measurement report mapping requirements specified below.

The reporting range for the absolute UE Rx-Tx time difference measurement (TUE Rx-Tx) is defined from -985024×Tc to 985024×Tc with the resolution step of 2*k*×Tc.

Table 6.6.20.0-1: Absolute UE Rx-Tx time difference measurement report mapping for *k*=5

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \le T_{UE\ Rx-Tx} < -984992$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-984992 \le T_{UE\ Rx-Tx} < -984960$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_30782	$-32 \le T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_30783	$0 \le T_{UE\ Rx-Tx} < 32$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_61563	$984960 \le T_{UE\ Rx-Tx} < 984992$	T_c
RX-TX_TIME_DIFFERENCE_61564	$984992 \le T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_61565	$985024 \le T_{UE\ Rx-Tx}$	T_c

The error in the reported value of UE Rx-Tx time difference measurement, including both the measurement error and the reporting quantization error, should be within the accuracy requirements specified in this clause.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that:

- The UE transmits SRS within [-160, 160] msec of at least one PDC DL PRS resource from the serving cell (PCell).

When a serving cell change occurs during the UE Rx-Tx measurement period, the UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx measurement.

The accuracy requirements in Table 6.6.20.0-2 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band.

AWGN propagation condition.

Table 6.6.20.0-2: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN

Accuracy	Conditions					
						Io[Note 4] range

	PRS Ês/Iot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS}/K_{comb}^{PRS}$ Note 3	NR operating band groups Note 2	Minimum Io Note 1	Maximum Io
Tc Note 5	dB	RB	kHz			dBm / SCS_{PRS}	dBm/BW
± [78+δ+ε]	-3	≥[24]	15	≥[4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	
					NR_TDD_FR1_C	-120	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	
					NR_FDD_FR1_F	-118.5	
					NR_FDD_FR1_G	-118	
					NR_FDD_FR1_H	-117.5	
± [59+δ+ε]		≥[52]		≥[1]	Note 6	NOTE 6	NOTE 6
± [30+δ+ε]		>[104]		≥[1]	Note 6	NOTE 6	NOTE 6
± [57+δ+ε]		≥[24]	30	≥[4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
					NR_FDD_FR1_B	-117.5	
					NR_TDD_FR1_C	-117	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-116	
					NR_FDD_FR1_F	-115.5	
					NR_FDD_FR1_G	-115	
					NR_FDD_FR1_H	-114.5	
± [30+δ+ε]		≥[48]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [15+δ+ε]		≥[132]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [29+δ+ε]		≥[24]	60	≥[4]	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
					NR_FDD_FR1_B	-114.5	
					NR_TDD_FR1_C	-114	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-113	
					NR_FDD_FR1_F	-113.5	
					NR_FDD_FR1_G	-113	
					NR_FDD_FR1_H	-111.5	
± [15+δ+ε]		≥[64]		≥[1]	NOTE 6	NOTE 6	NOTE 6
± [7+δ+ε]		≥[132]		≥[1]	NOTE 6	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: T_{rep}^{PRS}, L_{PRS}, K_{comb}^{PRS} are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN*defined in TS 37.355 [38].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: δ is the margin determined from Table 10.1.39.2-3.
NOTE 8: ε is the margin for reporting quantization error and ε=16 Tc.

Table 6.6.20.0-3: Margin for UE Rx-Tx time difference measurement accuracy in FR1

Min(PRS BW, SRS BW) (RB)			Margin (Tc Note 1)
SCS = 15 kHz	SCS = 30 kHz	SCS = 60 kHz	
≥ 24	N/A	N/A	160

≥ 52	≥ 24	N/A	80
≥ 104	≥ 48	≥ 24	56
N/A	≥ 132	≥ 64	24
N/A	N/A	≥ 132	24
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.			

6.6.20.1 NR SA FR1 UE Rx-Tx time difference measurement with PRS for RTT-based PDC

6.6.20.1.1 Test purpose

The purpose of the test is to verify that the UE Rx-Tx measurement for RTT-based PDC meets the requirements specified in TS 38.133[6] clause 9.12.4.1 for measurement delay and clause 10.1.39.2 for measurement accuracy in AWGN propagation condition in FR1 in standalone scenario.

6.6.20.1.2 Test applicability

This test applies to all types of NR UE release 17 onwards supporting *rtt-BasedPDC-PRS-r17 or gNB-SideRTT-BasedPDC-r17*.

6.6.20.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.20.0.

The normative reference for this requirement is TS 38.133 [6] clauses 9.12.4.1, 9.12.5, 10.1.39.2 and A.6.6.20.

6.6.20.1.4 Test description

6.6.20.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.20.1.4.1-1

Table 6.6.20.1.4.1-1: Supported test configurations

Configuration	Description
6.6.20-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.20-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.20-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 6.6.20.1.4.1-2.

Table 6.6.20.1.4.1-2: Initial conditions for UE Tx-Rx time difference measurement for FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.20.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 6.6.20.1.4.1-3.

2. Message contents are defined in clause 6.6.20.1.4.3.

3. The test scenario comprises of 1 NR Cell. The connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.20.1.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value
Active cell		1, 2, 3	Cell 1
RF Channel Number		1, 2, 3	1
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52
		2	10: $N_{RB,c}$ = 52
		3	40: $N_{RB,c}$ = 106
SSB configuration		1	SSB.1 FR1
		2	SSB.1 FR1
		3	SSB.2 FR1
SMTC configuration		1	SMTC.2
		2	SMTC.1
		3	SMTC.1
CP length		1, 2, 3	Normal
DRX		1, 2, 3	OFF
T1	s	1, 2, 3	5
T2	s	1, 2, 3	10

6.6.20.1.4.2 Test procedure

The test is considered with one cell (Cell 1) in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. The Cell 1 mutes PRS transmission during T1 and transmits PRS during T2.

measObject with *measObjectRxTxDiff-r17*, and *NR-DL-PRS-PDC-Info* is defined ~~in~~ as per 6.6.20.1.4.3 and shall be provided to the UE during T1.

The last TTI containing the RRC configuration shall be provided to the UE ΔT ms before the start of T2, where ΔT = 10 ms. The UE is configured to transmit SRS during T2.

The general and cell specific test parameters for PCell is given in Table 6.6.20.1.4.1-3 and Table 6.6.20.1.5-1, respectively. In the measurement control information, a measurement object is configured for the frequency of the PCell, and. The test consists of two successive time periods, with time duration of T1, and T2 respectively.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.20.1.5-1 as appropriate.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.20.1.5-1. T2 starts.

6. The UE shall transmit periodically MeasurementReport messages.

7. After 10s wait from Step 3, the SS shall check the *result-k5-r17* reported values in the periodic MeasurementReport. If the *result-k5* value is outside the limits in Table 6.6.20.0-1 or the UE fails to report the measurement value for serving cell, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

8. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6.6.20.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table 4.6.3-76B in 38.508-1 [14] with condition PRS_REF
Specific message contents exceptions for Test Configuration 6.6.20-1 and 6.6.20-2	Table 4.6.3-84AC in 38.508-1 [14] with condition SCS15
Specific message contents exceptions for Test Configuration 6.6.20-3	Table 4.6.3-84AC in 38.508-1 [14] with condition SCS30

6.6.20.1.5 Test requirements

Table 6.6.20.1.4.1-3 and Table 6.6.20.1.5-1 define the primary level settings including test tolerances for UE Rx-Tx time difference measurement with PRS for RTT-based PDC in FR1 SA.

Table 6.6.20.1.5-1: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	N/A	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	
TRS Configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	
PRS configuration		1	PRS.1.2 FR1	
		2	PRS.1.2 FR1	
		3	PRS.2.2 FR1	
PRS muting info		1, 2, 3	'10'	
SRS configuration		1	PDC-SRS.1	
		2	PDC-SRS.1	
		3	PDC-SRS.2	
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-98~~+TT~~	
		3	-95~~+TT~~	
N_{oc} Note 2	dBm/15 kHz	1	-98~~+TT~~	
		2	-98~~+TT~~	
		3	-98~~+TT~~	
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41~~+TT~~
		2		
		3		
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2~~+TT~~
		2		
		3		
	dBm/SCS kHz	1	-Infinity	-100~~+TT~~

PRS-RSRP Note 3		2	-Infinity	-100~~+TT~~
		3	-Infinity	-97~~+TT~~
Io	dBm/9.36 MHz	1	N/A	-67.67~~+TT~~
	dBm/9.36 MHz	2		-67.67~~+TT~~
	dBm/38.16 MHz	3		-61.57~~+TT~~
Propagation Condition		1, 2, 3	AWGN	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: The noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.6.20.1.5-2: SRS Configuration for FR1 Propagation Delay Compensation

	PDC-SRS.1	**PDC-SRS.2**	
Field			**Comment**
c-SRS	Same as $N_{RB,c}$ in the test case	Same as NRB,c in the test case	
b-SRS	0	0	
b-hop	0	0	Frequency hopping is disabled
groupOrSequenceHopping	neither	neither	No group or sequence hopping
freqDomainPosition	0	0	Frequency domain position of SRS
freqDomainShift	0	0	
pathlossReferenceRS ssb-Index	0	0	SSB #0 is used for SRS path loss estimation
usage	usagePDC-r17	usagePDC-r17	
startPosition	5	5	resourceMapping setting
nrofSymbols	4	4	
repetitionFactor	n.a.	n.a.	without repetition.
transmissionComb	n4	n4	
combOffset-n2	0	0	transmissionComb setting
cyclicShift-n2	0	0	
nrofSRS-Ports	port1	port1	Number of antenna ports used for SRS transmission
resourceType	Periodic	Periodic	
periodicityAndOffset-p	sl160, 20	Sl320, 40	SRS transmission periodicity

The UE Rx-Tx time difference measurement time shall fulfils the requirements specified in clause 6.6.20.0. The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 6.6.20.0

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 6.6.20.0 for Cell 1.

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.21 UE Rx-Tx time difference measurement for propagation delay compensation with TRS

6.6.21.0 Minimum conformance requirements

[38.133 clause 9.12.4.2, 9.12.5 and 10.1.25.3.1] for measurement time

When UE is configured with *csi-RS-Ref-r17* in *MeasObjectRxTxDiff*-r17 defined in TS 38.331 [2] and provided with TRS resource configuration, the UE shall be able to measure UE Rx-Tx time difference on PCell within the measurement period $T_{UERx-Tx_TRS}$, where:

$$T_{UERxTx,TRS} = N_{sample} * K_{layer3} * LCM(T_{TRS}, T_{DRX})$$

Where

N_{sample} is the number of UE Rx-Tx time difference measurement samples and N_{sample} is [4],

T_{TRS} is the TRS resource periodicity specific for RTT-based propagation delay compensation,

T_{DRX} is the DRX cycle length when DRX is in use, 1ms otherwise.

K_{layer3} is

N_{total} / $N_{available}$ when $N_{available}$>0

Where,

- For a window W of duration LCM(T_{TRS}, MGRP_max, T_{SMTC}) and starting at the beginning of any TRS resource occasion, where T_{SMTC} is the periodicity of SMTC for intra-frequency measurement without gap, and MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as PCell for a UE supporting *concurrentMeasGap-r17*and is configured with concurrent measurement gaps, otherwise MGRP_max is the MGRP of configured per-UE measurement gap or per-FR measurement gap within the same FR as PCell:
  - N_{total} is the total number of TRS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{available}$ is the number of TRS resource occasions that are not overlapped with
    - For FR1: any measurement gap occasions within window W. And for a UE supporting *concurrentMeasGap-r17* after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 within the window W

No requirements shall apply if $N_{available}$=0.

UE is only required to perform UE Rx-Tx time difference on TRS within the active DL BWP. When UE is configured to perform UE Rx-Tx time difference measurement based on TRS, the requirements apply provided that the SCS of the TRS is same as that of the active BWP on PCell.

If TRS resources overlap with Type 1A/1B/2 PPW, the UE is allowed longer measurement period to measure UE Rx-Tx time difference on PCell.

The UE Rx-Tx time difference measurement values contained in measurement report shall be based on the measurement report mapping requirements specified in below.

The reporting range for the absolute UE Rx-Tx time difference measurement (TUE Rx-Tx) is defined from -985024×Tc to 985024×Tc with the resolution step of 2*k*×Tc.

Table 6.6.21.0-1: Absolute UE Rx-Tx time difference measurement report mapping for *k*=5

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx}$ < -985024	T_c

RX-TX_TIME_DIFFERENCE_0001	$-985024 \le T_{UE\ Rx\text{-}Tx} < -984992$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-984992 \le T_{UE\ Rx\text{-}Tx} < -984960$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_30782	$-32 \le T_{UE\ Rx\text{-}Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_30783	$0 \le T_{UE\ Rx\text{-}Tx} < 32$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_61563	$984960 \le T_{UE\ Rx\text{-}Tx} < 984992$	T_c
RX-TX_TIME_DIFFERENCE_61564	$984992 \le T_{UE\ Rx\text{-}Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_61565	$985024 \le T_{UE\ Rx\text{-}Tx}$	T_c

The error in the reported value of UE Rx-Tx time difference measurement, including both the measurement error and the reporting quantization error, should be within the accuracy requirements specified in this clause.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall not apply, if:

- N_{TA_offset} defined in Table 7.1.2-2 changes during the UE Rx-Tx measurement period or
- if the uplink transmission timing changes during the UE Rx-Tx measurement period due to the network-configured Timing Advance.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that:

- The UE transmits SRS within [-160, 160] msec of at least one PDC TRS resource from the serving cell (PCell).

When a serving cell change occurs during the UE Rx-Tx measurement period, the UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx measurement.

The accuracy requirements in Table 6.6.21.0-2 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.13 for a corresponding Band.

AWGN propagation condition.

Table 6.6.21.0-2: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN

Accuracy	Conditions					
	TRS Ês/Iot	Minimum TRS bandwidth	TRS SCS	NR operating band groups[Note 2]	Io[Note 3] range	
					Minimum Io[Note 1]	Maximum Io
Tc[Note 4]	dB	RB	kHz		dBm / SCS_{TRS}	dBm/BW
[116+δ+ε]	-3	≥[24]	15	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
				NR_FDD_FR1_B	-120.5	
				NR_TDD_FR1_C	-120	
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	
				NR_FDD_FR1_F	-118.5	
				NR_FDD_FR1_G	-118	
				NR_FDD_FR1_H	-117.5	
[60+δ+ε]		≥[52]		Note 5	NOTE 5	NOTE 5
[29+δ+ε]		>[104]		Note 5	NOTE 5	NOTE 5
[56+δ+ε]		≥[24]	30	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
				NR_FDD_FR1_B	-117.5	
				NR_TDD_FR1_C	-117	
				NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	

				NR_FDD_FR1_E, NR_TDD_FR1_E	-116	
				NR_FDD_FR1_F	-115.5	
				NR_FDD_FR1_G	-115	
				NR_FDD_FR1_H	-114.5	
[29+δ+ε]		≥[48]		NOTE 5	NOTE 5	NOTE 5
[15+δ+ε]		≥[132]		NOTE 5	NOTE 5	NOTE 5
[29+δ+ε]		≥[24]	60	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
				NR_FDD_FR1_B	-114.5	
				NR_TDD_FR1_C	-114	
				NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	
				NR_FDD_FR1_E, NR_TDD_FR1_E	-113	
				NR_FDD_FR1_F	-113.5	
				NR_FDD_FR1_G	-113	
				NR_FDD_FR1_H	-111.5	
[14+δ+ε]		≥[64]		NOTE 5	NOTE 5	NOTE 5
[7+δ+ε]		≥[132]		NOTE 5	NOTE 5	NOTE 5

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: The Io is defined in TRS slots. The same Io range applies to TRS and non-TRS symbols. Io levels are different in TRS and non-TRS symbols within the same slot.
NOTE 4: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 5: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the TRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 6: δ is the margin determined from Table 10.1.39.3-3.
NOTE 7: ε is the margin for reporting quantitization error and $\varepsilon = 16\ Tc$.

Table 6.6.21.0-3: Margin for UE Rx-Tx time difference measurement accuracy in FR1

Min(TRS BW, SRS BW) (RB)			Margin (Tc [Note 1])
SCS = 15 kHz	SCS = 30 kHz	SCS = 60 kHz	
≥ 24	N/A	N/A	160
≥ 52	≥ 24	N/A	80
≥ 104	≥ 48	≥ 24	56
N/A	≥ 132	≥ 64	24
N/A	N/A	≥ 132	24

NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 2: If SRS and TRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.

6.6.21.1 NR SA FR1 UE Rx-Tx time difference measurement with TRS for RTT-based PDC

6.6.21.1.1 Test purpose

The purpose of the test is to verify that the UE Rx-Tx measurement with TRS for RTT-based PDC meets the requirements specified in clause 9.12.4.2 for measurement delay and clause 10.1.39.3 for measurement accuracy in AWGN propagation condition in FR1 in standalone scenario.

6.6.21.1.2 Test applicability

This test applies to all types of NR UE release 17 onwards supporting *rtt-BasedPDC-CSI-RS-ForTracking-r17 or gNB-SideRTT-BasedPDC-r17*.

6.6.21.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.21.0.

The normative reference for this requirement is TS 38.133 [6] clauses 9.12.4.2, 9.12.5, 10.1.39.3 and A.6.6.21.

6.6.21.1.4 Test description

6.6.21.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.21.1.4.1-1

Table 6.6.21.1.4.1-1: Supported test configurations

Configuration	Description
6.6.21-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.21-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.21-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 6.6.21.1.4.1-2.

Table 6.6.21.1.4.1-2: Initial conditions for UE Tx-Rx time difference measurement for FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.21.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

1. The general test parameter settings are set up according to Table 6.6.21.1.4.1-3.

2. Message contents are defined in clause 6.6.21.1.4.3.

3. The test scenario comprises of 1 NR Cell. The connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 6.6.21.1.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value
Active cell		1, 2, 3	Cell 1
RF Channel Number		1, 2, 3	1
$BW_{channel}$	MHz	1	10: $N_{RB,c}$ = 52
		2	10: $N_{RB,c}$ = 52
		3	40: $N_{RB,c}$ = 106
SSB configuration		1	SSB.1 FR1
		2	SSB.1 FR1
		3	SSB.2 FR1
SMTC configuration		1	SMTC.2
		2	SMTC.1
		3	SMTC.1
CP length		1, 2, 3	Normal
DRX		1, 2, 3	OFF
T1	s	1, 2, 3	1
T2	s	1, 2, 3	1

6.6.21.1.4.2 Test procedure

The test is considered with one cell (Cell 1) in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 does not have TRS transmission during T1 and transmits TRS during T2.

The measurement control information with *MeasObjectRxTxDiff* set to 'csi-RS-Ref' as defined in table 6.6.21.1.4.3-1, shall be provided to the UE during T1. The last TTI containing the RRC message shall be provided to the UE ΔT ms before the start of T2, where ΔT = 10 ms is the maximum processing time of the measurement request. The UE is configured to transmit SRS during T2.

The general and cell specific test parameters for PCell is given in Table 6.6.21.1.4.1-3 and Table 6.6.21.1.5-1, respectively. The test consists of two sub-tests with different TRS BW.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 6.6.21.1.5-1 as appropriate.
3. SS shall transmit an *RRCReconfiguration* message.
4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.21.1.5-1. T2 starts.
6. The UE shall transmit periodically MeasurementReport messages.
7. After 10s wait from Step 3, the SS shall check the *result-k5-r17* reported values in the periodic MeasurementReport. If the *result-k5* value is outside the limits in Table 6.6.21.0-2 or the UE fails to report the measurement value for serving cell, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
8. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6.6.21.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table 4.6.3-76B in 38.508-1 [14] with condition CSI-RS_REF
Specific message contents exceptions for Test Configuration 6.6.21-1 and 6.6.21-2	Table 4.6.3-84AC in 38.508-1 [14] with condition SCS15
Specific message contents exceptions for Test Configuration 6.6.21-3	Table 4.6.3-84AC in 38.508-1 [14] with condition SCS30

6.6.21.1.5 Test requirements

Table 6.6.21.1.4.1-3 and Table 6.6.21.1.5-1 define the primary level settings including test tolerances for UE Rx-Tx time difference measurement with TRS for RTT-based PDC in FR1 SA.

Table 6.6.21.1.5-1: Cell specific test parameters

Parameter	Unit	Test configuration	Values	
			T1	T2
TDD configuration		1	N/A	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD	
		2	SR.1.1 TDD	

		3	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	
TRS Configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	
SRS configuration		1	PDC-SRS.1	
		2	PDC-SRS.1	
		3	PDC-SRS.2	
N_{oc} Note 2	dBm/SCS	1	-98~~+TT~~	
		2	-98~~+TT~~	
		3	-95~~+TT~~	
N_{oc} Note 2	dBm/15 kHz	1	-98~~+TT~~	
		2		
		3		
TRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-3~~+TT~~
		2		
		3		
TRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-3~~+TT~~
		2		
		3		
TRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-101~~+TT~~
		2	-Infinity	-101~~+TT~~
		3	-Infinity	-98~~+TT~~
Io	dBm/9.36 MHz	1	N/A	-68.28~~+TT~~
	dBm/9.36 MHz	2		-68.28~~+TT~~
	dBm/38.16 MHz	3		-62.19~~+TT~~
Propagation Condition		1, 2, 3	AWGN	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: TRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.6.21.1.5-2: SRS Configuration for FR1 Propagation Delay Compensation

	PDC-SRS.1	**PDC-SRS.2**	
Field			**Comment**
c-SRS	Same as $N_{RB,c}$ in the test case	Same as NRB,c in the test case	
b-SRS	0	0	
b-hop	0	0	Frequency hopping is disabled
groupOrSequenceHopping	neither	neither	No group or sequence hopping
freqDomainPosition	0	0	Frequency domain position of SRS
freqDomainShift	0	0	
pathlossReferenceRS ssb-Index	0	0	SSB #0 is used for SRS path loss estimation
usage	usagePDC-r17	usagePDC-r17	

startPosition	5	5	resourceMapping setting
nrofSymbols	4	4	
repetitionFactor	n.a.	n.a.	without repetition.
transmissionComb	n4	n4	
combOffset-n2	0	0	transmissionComb setting
cyclicShift-n2	0	0	
nrofSRS-Ports	port1	port1	Number of antenna ports used for SRS transmission
resourceType	Periodic	Periodic	
periodicityAndOffset-p	sl160, 20	Sl320, 40	SRS transmission periodicity

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 6.6.21.0.

The UE shall perform and report UE Rx-Tx time difference measurement for Cell 1 within the specified UE Rx-Tx time difference measurement time starting from the beginning of T2.

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 6.6.21.0.

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.22

6.6.23

6.6.24 SA event triggered reporting tests with NeedForGap

6.6.24.0 Minimum conformance requirements

6.6.24.0.1 Minimum conformance requirements for intra-frequency event-triggered measurement without gap

[TS 38.133 [6], clause 9.2.5]

The UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_without_index}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2 with SCS smaller or equal to 480 kHz.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}) \text{ ms}$$

$$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection

- For UE indicating *no-gap-no-interruption* via *NeedForInterruptionInfoNR-r18*, T_{PSS/SSS_sync_intra} is given in Table 6.6.24.0.1-1 for FR1. For UE indicating *no-gap-with-interruption* via *NeedForInterruptionInfoNR-r18*, T_{PSS/SSS_sync_intra} is given in Table 6.6.24.0.1-3 for FR1.

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured.

- For UE indicatting *no-gap-no-interruption* via *NeedForInterruptionInfoNR-r18*, $T_{SSB_time_index_intra}$ is given in Table 6.6.24.0.1-2 for FR1. For UE indicating *no-gap-with-interruption* via *NeedForInterruptionInfoNR-r18*, $T_{SSB_time_index_intra}$ is given in Table 6.6.24.0.1-4 for FR1.

- $T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement

  - For UE indicating *no-gap-no-interruption* via *NeedForInterruptionInfoNR-r18*, $T_{SSB_measurement_period_intra}$ is given in Table 6.6.24.0.1-5 for FR1. For UE indicating *no-gap-with-interruption* via *NeedForInterruptionInfoNR-r18*, $T_{SSB_measurement_period_intra}$ is given in Table 6.6.24.0.1-6 for FR1.

- $CSSF_{intra}$: it is a carrier specific scaling factor and is determined

  - according to $CSSF_{outside_gap,i}$ in TS 38.133 [6] clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e.

    - when intra-frequency SMTC is fully non overlapping or partially overlapping with GAP, or

    - when intra-frequency SMTC is fully non overlapping with GAP for UE indicating no-gap-with-interruption, or

    - when intra-frequency SMTC is fully non overlapping or partially overlapping with GAP for UE indicating no-gap-no-interruption, or

  if the high layer in TS 38.331 [13] signalling of *smtc2* is configured, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

  K_p is the scaling factor for an SSB frequency layer to be measured without GAP. $K_p = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

- For a window W of duration max(SMTC period, xRP_max), where xRP_max is the maximum xRP across all configured per-UE GAPs, periodic MUSIM gaps, and/or per-FR GAPs within the same FR as the SSB frequency layer, and starting from the beginning of any SMTC occasion:

  - N_{total} is the total number of SMTC occasions within the window, including those overlapped with GAP and MUSIM gap occasions within the window, and

  - $N_{available}$ is the number of SMTC occasions that are not overlapped with any non-dropped GAP or non-dropped MUSIM gap occasions within the window W, after accounting for measurement GAP and MUSIM gap collisions by applying the collision rules for GAP and MUSIM gap.

    $K_p = 1$ when $N_{available} = 0$.

  - xRP = MGRP when configured GAP is activated Pre-MG or MG, and xRP = VIRP when configured GAP is NCSG, also xRP = MGRP for periodic MUSIM gap.

    Requirements in this clause do not apply when $N_{available} = 0$ due to fully overlapping between SMTC occasions and MUSIM gap occasions within the window W.

- When the target SSB is completely contained in active BWP of UE or the active downlink BWP is initial BWP, the intra-frequency measurement shall be conducted without gap and without interruption regardless of the NeedForGaps' status reporting.

Table 6.6.24.0.1-1: Time period for PSS/SSS detection, (Frequency range FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(M2 [Note 2]x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms;,otherwise M2=1.	

NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.
NOTE 4: When *highSpeedMeasCA-Scell-r17* is configured and UE supports *measurementEnhancementCA-r17*, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1.

Table 6.6.24.0.1-2: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil (M2 [Note 2] x 3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{intra}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms;,otherwise M2=1
NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.
NOTE 4: When *highSpeedMeasCA-Scell-r17* is configured and UE supports *measurementEnhancementCA-r17*, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1

Table 6.6.24.0.1-3: Time period for PSS/SSS detection for UE indicating *no-gap-with-interruption*, (Frequency range FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, 5 x max (80ms, SMTC period))[Note 1] x $CSSF_{intra}$
[DRX cycle≤ 320ms]	max(600ms, ceil(M2 [Note 2]x 5) x [max(80ms, SMTC period,DRX cycle)]) x $CSSF_{intra}$
[DRX cycle>320ms]	5 x [DRX cycle x] $CSSF_{intra}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms;,otherwise M2=1.
NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16* on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.
NOTE 4: When *highSpeedMeasCA-Scell-r17* is configured and UE supports *measurementEnhancementCA-r17*, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1.
NOTE 5: Requirements only apply when measurement gap is not configured, or measurement gap is fully non-overlapped with SMTC on any carrier on which UE indicates [no gap with interruption].

Table 6.6.24.0.1-4: Time period for time index detection for UE indicating *no-gap-with-interruption* (FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, 3 x max (80ms, SMTC period))[Note 1] x $CSSF_{intra}$
[DRX cycle≤ 320ms]	max(120ms, ceil (M2 [Note 2] x 3) x [max(80ms, SMTC period,DRX cycle)]) x $CSSF_{intra}$
[DRX cycle>320ms]	3 x DRX cycle x $CSSF_{intra}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2: When *highSpeedMeasFlag-r16* is not configured, M2 = 1.5; When *highSpeedMeasFlag-r16* is configured, M2 = 1.5 if SMTC periodicity > 40 ms;,otherwise M2=1
NOTE 3: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16* on measurements of the

	primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.
NOTE 4:	When *highSpeedMeasCA-Scell-r17* is configured and UE supports *measurementEnhancementCA-r17*, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2=1
NOTE 5:	Requirements only apply when measurement gap is not configured, or measurement gap is fully non-overlapped with SMTC on any carrier on which UE indicates [no gap with interruption].

Table 6.6.24.0.1-5: Measurement period for intra-frequency measurements without gaps (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1:	If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified

Table 6.6.24.0.1-6: Measurement period for intra-frequency measurements without gaps for UE indicating *no-gap-with-interruption* (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, 5 x (80ms, SMTC period))[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5) x [max(80ms, SMTC period,DRX cycle)]) x $CSSF_{intra}$
DRX cycle>320ms	5 x DRX cycle x $CSSF_{intra}$
NOTE 1:	If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2:	Requirements only apply when measurement gap is not configured, or measurement gap is fully non-overlapped with SMTC on any carrier on which UE indicates '*no-gap-with-interruption*' via *NeedForInterruptionInfoNR-r18*.

6.6.24.0.2 Minimum conformance requirements for inter-frequency event-triggered measurement without gap

[TS 38.133 [6], clause 9.3.9]

UE satisfying the applicability conditions specified in TS 38.133 [6] 9.3.1 on the requirement in this clause shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured) or *deriveSSB-IndexFromCellInter-r17* is configured for the FR1 and FR2-1 target frequency layers and and UE supporting *deriveSSB-IndexFromCellInterNon-NCSG-r17*. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$.

- For inter-frequency SSB based measurements without measurement gaps in active BWP, it is assumed that when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2, SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter}) \text{ ms}$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection

- For UE indicating no-gap-no-interurption, T_{PSS/SSS_sync_inter} is given in Table 6.6.24.0.2-1 for FR1.
- For UE indicating no-gap-with-interruption, T_{PSS/SSS_sync_inter} is given in Table 6.6.24.0.2-2 for FR1.

- $T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured

- For UE indicating no-gap-no-interurption, $T_{SSB_time_index_inter}$ is given in Table 6.6.24.0.2-3 for FR1.
- For UE indicating no-gap-with-interruption, $T_{SSB_time_index_inter}$ is given in Table 6.6.24.0.2-4 for FR1.

- $T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement
  - For UE indicating no-gap-no-interurption, $T_{SSB_measurement_period_inter}$ is given in Table 6.6.24.0.2-5 for FR1.
  - For UE indicating no-gap-with-interruption, $T_{SSB_measurement_period_inter}$ is given in Table 6.6.24.0.2-6 for FR1.

  $CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in TS 38.133 [6] clause 9.1.5.1 for measurement conducted outside GAP, i.e. when interfrequency SMTC is fully non overlapping or partially overlapping with GAPs.
  - when inter-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps for UE indicating no-gap-no-interruption or
  - when inter-frequency SMTC is fully non overlapping with measurement gaps for UE indicating n- gap-with-interruption,

If the UE indicates 'nogap-noncsg' via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement or the UE indicates either *no-gap-with-interruption* or *no-gap-no-interruption* via *NeedForInterruptionInfoNR-r18*,

M_{pss/sss_sync_inter}: For FR1, $M_{pss/sss_sync_inter} = 8$.

$M_{SSB_index_inter}$: For FR1, $M_{SSB_index_inter} = 3$.

$M_{meas_period_inter}$: For FR1, $M_{meas_period_inter} = 8$.

When UE is not configured with or UE does not support concurrent GAPs and the UE is not configured with MUSIM gaps:

When interfrequency SMTC is fully non overlapping with measurement gaps or NCSG, or interfrequency SMTC is fully overlapping with MGs or NCSG, $K_p = 1$.

When interfrequency SMTC is partially overlapping with measurement gaps, K_p = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP. When inter-frequency SMTC is partially overlapping with NCSG, K_p = 1/(1- (SMTC period /VIRP)), where SMTC period < VIRP.

For calculation of K_p, if the high layer signalling (TS 38.331 [13]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*.

Table 6.6.24.0.2-1: Time period for PSS/SSS detection, (FR1)

DRX cycle	T_{PSS/SSS_sync_inter}
No DRX	max(600ms, ceil(M_{pss/sss_sync_inter} x K_p) x SMTC period)[Note 1] x $CSSF_{inter}$
DRX cycle≤ 320ms	max(600ms, ceil(M2x M_{pss/sss_sync_inter} x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	ceil(M_{pss/sss_sync_inter} x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: Void NOTE 3: When *highSpeedMeasInterFreq-r17* is not configured, M2 = 1.5; When *highSpeedMeasInterFreq-r17* is configured, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2 = 1	

Table 6.6.24.0.2-2: Time period for PSS/SSS detection, when UE indicate *no-gap-with-interruption* (FR1)

DRX cycle	T_{PSS/SSS_sync_inter}
No DRX	max(600ms, M_{pss/sss_sync_inter} x max(80ms, SMTC period))[Note 1] x $CSSF_{inter}$
[DRX cycle≤ 320ms]	max(600ms, ceil(M2 x M_{pss/sss_sync_inter}) x max(80ms, SMTC period,DRX cycle)) x $CSSF_{inter}$
[DRX cycle>320ms]	M_{pss/sss_sync_inter} x DRX cycle x $CSSF_{inter}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2: Void
NOTE 3: When *highSpeedMeasInterFreq-r17* is not configured, M2 = 1.5; When *highSpeedMeasInterFreq-r17* is configured, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2 = 1

Table 6.6.24.0.2-3: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_inter}$
No DRX	max(120ms, ceil($M_{SSB_index_inter}$ x K_p) x SMTC period)$^{Note\ 1}$ x $CSSF_{inter}$
DRX cycle≤ 320ms	max(120ms, ceil (M2 x $M_{SSB_index_inter}$ x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	Ceil($M_{SSB_index_inter}$ x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: Void NOTE 3: When *highSpeedMeasInterFreq-r17* is not configured, M2 = 1.5; When *highSpeedMeasInterFreq-r17* is configured, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2 = 1	

Table 6.6.24.0.2-4: Time period for time index detection, when UE indicate no-gap-with-interruption (FR1)

DRX cycle	$T_{SSB_time_index_inter}$
No DRX	max(120ms, $M_{SSB_index_inter}$ x max(80ms, SMTC period))$^{Note\ 1}$ x $CSSF_{inter}$
DRX cycle≤ 320ms	max(120ms, ceil (M2 x $M_{SSB_index_inter}$) x [max(80ms, SMTC period, DRX cycle)]) x $CSSF_{inter}$
DRX cycle>320ms	$M_{SSB_index_inter}$ x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: Void NOTE 3: When *highSpeedMeasInterFreq-r17* is not configured, M2 = 1.5; When *highSpeedMeasInterFreq-r17* is configured, M2 = 1.5 if SMTC periodicity > 40 ms; otherwise M2 = 1	

Table 6.6.24.0.2-5: Measurement period for inter-frequency measurements without gaps (FR1)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, ceil($M_{meas_period_inter}$ x K_p) x SMTC period)$^{Note\ 1}$ x $CSSF_{inter}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x $M_{meas_period_inter}$ x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	ceil($M_{meas_period_inter}$ x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 6.6.24.0.2-6: Measurement period for inter-frequency measurements without gaps when UE indicate [no-gap-with-interruption] (FR1)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, $M_{meas_period_inter}$ x max(80ms, SMTC period))$^{Note\ 1}$ x $CSSF_{inter}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x $M_{meas_period_inter}$) x max(80ms, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	$M_{meas_period_inter}$ x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

6.6.24.0.3 Minimum conformance requirements for measurements without gap carried out by UE supporting NeedForInterruptionInfoNR

[TS 38.133 [6], clause 8.2.2.2.19]

When a UE supports *NeedForInterruptionInfoNR-r18* measurements and indicates *no-gap-with-interruption* on intra-frequency SSB-based or inter-frequency SSB-based measurements, the UE is allowed to cause interruptions while performing measurements on the frequency layers of the bands for which *no-gap-with-interruption* is indicated. Requirements in this section apply only when the UE is in SA operation mode.

The UE is allowed to cause interruption with interruption ratio no more than the requirements specified below upon UE measurements on a specific frequency layer that corresponds to the configured MO, where $T_{cycle,i}$ is the interruption cycle on a certain frequency layer i, specified in Table 6.6.24.0.3-1, where $CSSF_{outside_gap,i}$ is defined in TS 38.133 [6] clause 9.1.5.1 for measurement conducted outside measurement gaps.

Table 6.6.24.0.3-1: $T_{cycle,i}$ length for inter/intra-frequency measurement target carrier i

DRX cycle	$T_{Cycle,i}$
No DRX	max (80ms, SMTC period) x $CSSF_{outside_gap,i}$
DRX cycle ≤ 320ms	1.5*max(80ms, SMTC period, DRX cycle) x $CSSF_{outside_gap,i}$
DRX cycle>320ms	DRX cycle x $CSSF_{outside_gap,i}$

UE is allowed to cause interruption on a certain frequency layer *i* with the maximum interruption ratio that equals $\frac{2L}{T_{cycle,i}}$.

The total allowed maximum interruption ratio (D) on each of the active serving cells due to UE measurements without gap applied in this sub-clause is specified as

$$D = \sum_{i=1}^{N} \frac{2L}{T_{cycle,i}}$$

Where,

- N is the total number of configured SSB based frequency layers to be measured outside gap including intra-frequency and inter-frequency target carriers where UE indicates that interruption is needed through *[no-gap-with-interruption]*, and
- L is the maximum interruption length for each interruption occasion specified in the Table 6.6.24.0.3-2.

When no SMTC occasion of the NR measurement objects occurs within the time period which starts from [4ms] before the starting point of the DRX ON duration to [4ms] after the ending point of the DRX ON duration, UE is not allowed to cause interruption during DRX ON duration except the time duration extended due to *drx-inactivityTimer*.

The interruptions are allowed for all the active serving cells in the same FR as all NR MOs being measured with interruption if UE supports per-FR measurement gaps, and all the active serving cells if UE does not support per-FR measurement gaps.

Table 6.6.24.0.3-2: Interruption length L in FR1

μ	SCS (kHz) of victim cell	NR Slot length (ms) of victim cell	Number of interrupted slots in the victim cell (slots)	Interruption length L (ms)
0	15	1	[1]	[1]
1	30	0.5	[2]	[1]
2	60	0.25	[4]	[1]

6.6.24.1 NR SA FR1 event-triggered reporting without gap with interruptions

Editor's Note: This test case is incomplete in following aspects:

TT analysis is missing.

Test applicability is missing.

6.6.24.1.1 Test purpose

To verify the UE's ability to perform correct reporting of an event within intra-frequency cell search without gap and to verify that the interruption ratio does not exceed the limit for the NR PCell during the measurement without gaps and with interruptions.

6.6.24.1.2 Test applicability

This test applies to all types of NR UE from release 18 onwards supporting CSI-RS-based RLM, BWP operation without bandwidth restriction and NR NeedForGap capability. The UE is capable of *nr-NeedForGap-Reporting-r16*, *nr-NeedForInterruptionReport-r18* and reports 'no-gap' in NeedForGapsIntraFreq-r16 and 'no-gap-with-interruption' in interruptionIndication-r18 for intra frequency.

6.6.24.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.24.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.24.1.

6.6.24.1.4 Test description

6.6.24.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.6.24.1.4.1-1.

Table 6.6.24.1.4.1-1: NR SA FR1 event-triggered reporting without gap with interruptions test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.6.24.1.4.1-2.

Table 6.6.24.1.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting without gap with interruptions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.4.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.6.24.1.4.1-3.
2. Message contents are defined in clause 6.6.24.1.4.3.
3. Two cells are deployed in the test, which are FR1 PCell(Cell 1) and FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 6.6.24.1.4.1-3: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 without DRX

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 µs	Synchronous cells
		3	3 µs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	

6.6.24.1.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table 6.6.24.1.4.1-1, 6.6.24.1.4.1-3 and 6.6.24.1.5-1. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The PCell shall continuously scheduled with data in the DL starting from T1 until the UE has sent the measurement report during T2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

The UE is capable of measurements without gaps with interruption and report 'no-gap' through NeedForGapsIntraFreq-r16 and 'no-gap-with-interruption' in interruptionIndication-r18 for PCell. UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 6.6.24.1.5-1.
3. SS shall transmit an *RRCReconfiguration* message with *needForGapsConfigNR-r16* and *needForInterruptionConfigNR-r18* enabled.
4. The UE shall transmit *RRCReconfigurationComplete* message with *NeedForGapsIntraFreq-r16* set to 'no-gap' and *intraFreq-needForInterruption-r18* set to 'no-gap-with-interruption'.
5. SS shall transmit an *RRCReconfiguration* message.
6. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
7. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

8. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.24.1.5-1. T2 start.

9. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1002ms and if UE transmits ACK/NACK in PCell with a missed ACK/NACK rate of no more than 2.5% from T2, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or the rate of missed ACK/NACK in PCell exceeds 2.5% from T2, then the number of failure tests is increased by one.

10. After the SS receive the *MeasurementReport* message in step 7 or when T2 expires, the SS shall:

    - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

11. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

12. Depending on the choice in Step 10, the SS:
    - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.24.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.24.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions (step 5)	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 1 and Synchronous cells for 6.6.24.1-1 and 6.6.24.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC pattern 1 and Synchronous cells for 6.6.24.1-3 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ

Table 6.6.24.1.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
}			

firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 configuration	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

Condition	Explanation
BWP-Id1	Active BWP (BWP2)

Table 6.6.24.1.4.3-3: *RRCReconfiguration* (step 3)

Derivation Path: Table H.3.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	Not present		
NeedForGapsConfigNR-r16 CHOICE {			
setup SEQUENCE{			
requestedTargetBandFilterNR-r16 SEQUENCE (SIZE (1..maxBands)) OF FreqBandIndicatorNR {	1 entries		
FreqBandIndicatorNR[0]	tested band		
}			
}			
needForInterruptionConfigNR-r18	enabled		
}			
}			
}			

Table 6.6.24.1.4.3-4: ***RRCConnectionReconfigurationComplete*** **(step 4)**

Derivation Path: TS 38.508 [25], Table 4.6.1-14			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfigurationComplete ::= SEQUENCE {			
rrc-TransactionIdentifier	Not checked		
criticalExtensions CHOICE {			
rrcReconfigurationComplete SEQUENCE {			
needForGapsInfoNR-r16 SEQUENCE {			
NeedForGapsIntraFreqList-r16 SEQUENCE (SIZE (1..maxNrofServingCells)) OF NeedForGapsIntraFreq-r16 {			
NeedForGapsIntraFreq-r16[0] SEQUENCE {			
servCellId-r16	0		
gapIndicationIntra-r16	no-gap		
}			
NeedForGapsBandListNR-r16 SEQUENCE (SIZE (1..maxBands)) OF NeedForGapsNR-r16 {			
NeedForGapsInterFreq-r16[0] SEQUENCE {			
bandNR-r16	Tested band		
gapIndicationInter-r16	Not checked		
}			
}			

needForInterruptionInfoNR-r18 SEQUENCE {			
NeedForInterruptionIntraFreqList-r18 SEQUENCE (SIZE (1..maxNrofServingCells)) OF NeedForInterruptionNR-r18 {			
NeedForInterruptionNR-r18[0] SEQUENCE {			
interruptionIndication-r18	no-gap-with-interruption		
}			
}			
NeedForInterruptionBandListNR-r18 SEQUENCE (SIZE (1..maxBands)) OF NeedForInterruptionNR-r18 {			
NeedForInterruptionNR-r18[0] SEQUENCE {			
interruptionIndication-r18	Not checked		
}			
}			
}			
}			
}			
}			

6.6.24.1.5 Test requirements

Table 6.6.24.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.24.1.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 without DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.2	
Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.2	
RLM-RS		1, 2, 3	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1	-98+TT			
		2	-98+TT			

		3	-95+TT			
N_{oc} Note 2	dBm/15 kHz	1	-98+TT			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4+TT	-1.46+TT	-Infinity	-1.46+TT
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4+TT	4+TT	-Infinity	4+TT
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94+TT	-94+TT	-Infinity	-94+TT
		2	-94+TT	-94+TT	-Infinity	-94+TT
		3	-91+TT	-91+TT	-Infinity	-91+TT
Io	dBm/9.36 MHz	1	-64.60+TT	-62.25+TT	-64.60+TT	-62.25+TT
	dBm/9.36 MHz	2	-64.60+TT	-62.25+TT	-64.60+TT	-62.25+TT
	dBm/38.16 MHz	3	-58.50+TT	-56.16+TT	-58.50+TT	-56.16+TT
Propagation Condition		1, 2, 3	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall be continuously scheduled on PCell during the entire length of T1 and T2.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1000 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

During 1000ms from the beginning of time period T2, the UE shall transmit ACK/NACK in PCell and the rate of missed ACK/NACK shall no more than 2.5%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.24.2 NR SA FR1-FR1 event-triggered reporting without gap with interruption with SSB index

Editor's Note: This test case is incomplete in following aspects:

TT analysis is missing.

Test applicability is missing.

6.6.24.2.1 Test purpose

To verify the UE's ability to perform correct reporting of an event within inter-frequency cell search without gap and to verify that the interruption ratio does not exceed the limit for the NR PCell during the measurement without gaps and with interruptions.

6.6.24.2.2 Test applicability

This test applies to all types of NR UE from release 18 onwards supporting NR NeedForGap capability. The UE is capable of *nr-NeedForGap-Reporting-r16*, *nr-NeedForInterruptionReport-r18* and reports 'no-gap' in NeedForGapsInterFreq-r16 and 'no-gap-with-interruption' in interruptionIndication-r18 for the target frequency given the serving frequency.

6.6.24.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.24.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.24.2.

6.6.24.2.4 Test description

6.6.24.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.6.24.2.4.1-1.

Table 6.6.24.2.4.1-1: NR SA event triggered reporting tests for FR1 for inter-frequency measurement without gap with interruption test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 6.6.24.2.4.1-2.

Table 6.6.24.2.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting for inter-frequency measurement without gap with interruptions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.4.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.6.24.2.4.1-3.
2. Message contents are defined in clause 6.6.24.2.4.3.

3. There are two NR carriers and one cell on each carrier in the test. Cell 1 (Pcell) is on NR RF channel 1, and is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test. Cell 2 (inter neighbour cell) is on NR RF channel 2.

Table 6.6.24.2.4.1-3: General test parameters for SA event triggered reporting tests for FR1 for inter-frequency measurement without gap with interruption

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies are used
Active cell		Config 1,2,3	NR Cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1
Neighbour cell		Config 1,2,3	NR Cell 2	NR Cell 2 is on NR RF channel number 2
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	2	

6.6.24.2.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters for PCell are given in Table 6.6.24.2.4.1-1, 6.6.24.2.4.1-3 and 6.6.24.2.5-1. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The PCell shall continuously scheduled with data in the DL starting from T2 until the UE has sent the measurement report during T2.

NR RF channel 1 and NR RF channel 2 should be selected such that UE reports ‘no-gap’ and ‘no-gap-with-interruption’ for the target frequency on NR RF channel 2

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.24.2.5-1.

3. SS shall transmit an *RRCReconfiguration* message with *needForGapsConfigNR-r16* and *needForInterruptionConfigNR-r18* enabled.

4. The UE shall transmit *RRCReconfigurationComplete* message with *NeedForGapsInterFreq-r16* set to ‘no-gap’ and *interFreq-needForInterruption-r18* set to ‘no-gap-with-interruption’.

5. SS shall transmit an *RRCReconfiguration* message.

6. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

7. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.24.2.5-1. T2 start.

8. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

9. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1522ms and if UE transmits ACK/NACK in PCell with a missed ACK/NACK rate of no more than 2.5% from T2, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or the rate of missed ACK/NACK in PCell exceeds 2.5% from T2, then the number of failure tests is increased by one.

10. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

    - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

11. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

12. Depending on the choice in Step 10, the SS:
    - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.24.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.24.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions (step 5)	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, SSB.5 FR1 and SMTC.5 for configuration 6.6.24.2-1 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.5 FR1 and SMTC.4 and synchronous cells for configuration 6.6.24.2-2 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.6 FR1, SMTC.4 and synchronous cells for configuration 6.6.24.2-3 Table H.3.1-4 with A3-offset = -6dB and Condition SSB Index Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ and SSB Index

Table 6.6.24.2.4.3-2: *RRCReconfiguration* (step 3)

Derivation Path: Table H.3.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	Not present		
NeedForGapsConfigNR-r16 CHOICE {			
setup SEQUENCE{			
requestedTargetBandFilterNR-r16 SEQUENCE (SIZE (1..maxBands)) OF FreqBandIndicatorNR {	1 entries		
FreqBandIndicatorNR[0]	tested band		
}			
}			
needForInterruptionConfigNR-r18	enabled		
}			
}			
}			

Table 6.6.24.2.4.3-3: ***RRCConnectionReconfigurationComplete*** **(step 4)**

Derivation Path: TS 38.508 [25], Table 4.6.1-14			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfigurationComplete ::= SEQUENCE {			
rrc-TransactionIdentifier	Not checked		
criticalExtensions CHOICE {			
rrcReconfigurationComplete SEQUENCE {			
needForGapsInfoNR-r16 SEQUENCE {			
NeedForGapsIntraFreqList-r16 SEQUENCE (SIZE (1..maxNrofServingCells)) OF NeedForGapsIntraFreq-r16 {			
NeedForGapsIntraFreq-r16[0] SEQUENCE {			
servCellId-r16	0		
gapIndicationIntra-r16	Not checked		
}			
NeedForGapsBandListNR-r16 SEQUENCE (SIZE (1..maxBands)) OF NeedForGapsNR-r16 {			
NeedForGapsInterFreq-r16[0] SEQUENCE {			
bandNR-r16	Tested band		
gapIndicationInter-r16	no-gap		
}			
}			
needForInterruptionInfoNR-r18 SEQUENCE {			
NeedForInterruptionIntraFreqList-r18 SEQUENCE (SIZE (1..maxNrofServingCells)) OF NeedForInterruptionNR-r18 {			
NeedForInterruptionNR-r18[0] SEQUENCE {			
interruptionIndication-r18	Not checked		
}			
}			
NeedForInterruptionBandListNR-r18 SEQUENCE (SIZE (1..maxBands)) OF NeedForInterruptionNR-r18 {			
NeedForInterruptionNR-r18[0] SEQUENCE {			
interruptionIndication-r18	no-gap-with-interruption		
}			
}			
}			
}			
}			

6.6.24.2.5 Test requirements

Table 6.6.24.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.24.2.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without gap

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
CORESET Reference Channel			Config 1	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.4			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							

EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98+TT		-98+TT	
N_{oc} Note2	dBm/SCS	Config 1,2	-98+TT		-98+TT	
		Config 3	-95+TT		-95+TT	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94+TT	-94+TT	-Infinity	-91+TT
		Config 3	-91+TT	-91+TT	-Infinity	-88+TT
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4+TT	4+TT	-Infinity	7+TT
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4+TT	4+TT	-Infinity	7+TT
Io Note3	dBm/9.36MHz	Config 1,2	-64.59+TT	-64.59+TT	-70.05+TT	-62.26+TT
	dBm/38.16MHz	Config 3	-58.49+TT	-58.49+TT	-63.94+TT	-56.15+TT
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1520 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

During 1520ms from the beginning of time period T2, the UE shall transmit ACK/NACK in PCell and the rate of missed ACK/NACKs shall no more than 2.5%.

UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.24.3 NR SA FR1-FR1 event-triggered reporting without gap with interruption

Editor's Note: This test case is incomplete in following aspects:

TT analysis is missing.

Test applicability is missing

6.6.24.3.1 Test purpose

To verify the UE's ability to perform correct reporting of an event within inter-frequency cell search without gap and to verify that the interruption ratio does not exceed the limit for the NR PCell during the measurement without gaps and with interruptions.

6.6.24.3.2 Test applicability

This test applies to all types of NR UE from release 18 onwards supporting NR NeedForGap capability. The UE is capable of *nr-NeedForGap-Reporting-r16*, *nr-NeedForInterruptionReport-r18* and reports 'no-gap' in NeedForGapsInterFreq-r16 and 'no-gap-with-interruption' in interruptionIndication-r18 for the target frequency given the serving frequency.

6.6.24.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.24.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.24.3.

6.6.24.3.4 Test description

6.6.24.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.6.24.3.4.1-1.

Table 6.6.24.3.4.1-1: NR SA event triggered reporting tests for FR1 for inter-frequency measurement without gap with interruption test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 6.6.24.3.4.1-2.

Table 6.6.24.3.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting for inter-frequency measurement without gap with interruptions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.4.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.6.24.3.4.1-3.
2. Message contents are defined in clause 6.6.24.3.4.3.
3. There are two NR carriers and one cell on each carrier in the test. Cell 1 (Pcell) is on NR RF channel 1, and is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test. Cell 2 (inter neighbour cell) is on NR RF channel 2.

Table 6.6.24.3.4.1-3: General test parameters for SA event triggered reporting tests for FR1 for inter-frequency measurement without gap with interruption

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR Cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1.

Neighbour cell		Config 1,2,3	NR Cell 2	NR Cell 2 is on NR RF channel number 2.
SMTC for NR RF channel number 2		Config 1,2,3	SMTC.3	As specified in clause A.4.1
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

6.6.24.3.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters for PCell are given in Table 6.6.24.3.4.1-1, 6.6.24.3.4.1-3 and 6.6.24.3.5-1. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The PCell shall continuously scheduled with data in the DL starting from T2 until the UE has sent the measurement report during T2.

NR RF channel 1 and NR RF channel 2 should be selected such that UE reports ‘no-gap’ and ‘no-gap-with-interruption’ for the target frequency on NR RF channel 2

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.24.3.5-1.

3. SS shall transmit an *RRCReconfiguration* message with *needForGapsConfigNR-r16* and *needForInterruptionConfigNR-r18* enabled.

4. The UE shall transmit *RRCReconfigurationComplete* message with *NeedForGapsInterFreq-r16* set to ‘no-gap’ and *interFreq-needForInterruption-r18* set to ‘no-gap-with-interruption’.

5. SS shall transmit an *RRCReconfiguration* message.

6. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

7. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

8. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.24.3.5-1. T2 start.

9. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 2562ms and if UE transmits ACK/NACK in PCell with a missed ACK/NACK rate of no more than 1.25% from T2, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or the rate of missed ACK/NACK in PCell exceeds 1.25% from T2, then the number of failure tests is increased by one.

10. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

    - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

11. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

12. Depending on the choice in Step 0, the SS:
    - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.24.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.24.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1 and SMTC.3 for configuration 6.6.24.3-1 and 6.6.24.3-2 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.2 FR1, SMTC.3 and synchronous cells for configuration 6.6.24.3-3 Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ

Table 6.6.24.3.4.3-2: *RRCReconfiguration* (step 3)

Derivation Path: Table H.3.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	Not present		
NeedForGapsConfigNR-r16 CHOICE {			
setup SEQUENCE{			
requestedTargetBandFilterNR-r16 SEQUENCE (SIZE (1..maxBands)) OF FreqBandIndicatorNR {	1 entries		
FreqBandIndicatorNR[0]	tested band		
}			
}			
needForInterruptionConfigNR-r18	enabled		
}			
}			
}			

Table 6.6.24.3.4.3-3: ***RRCConnectionReconfigurationComplete*** **(step 4)**

Derivation Path: TS 38.508 [25], Table 4.6.1-14			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfigurationComplete ::= SEQUENCE {			
rrc-TransactionIdentifier	Not checked		
criticalExtensions CHOICE {			
rrcReconfigurationComplete SEQUENCE {			
needForGapsInfoNR-r16 SEQUENCE {			
NeedForGapsIntraFreqList-r16 SEQUENCE (SIZE (1..maxNrofServingCells)) OF NeedForGapsIntraFreq-r16 {			
NeedForGapsIntraFreq-r16[0] SEQUENCE {			
servCellId-r16	0		
gapIndicationIntra-r16	Not checked		
}			
NeedForGapsBandListNR-r16 SEQUENCE (SIZE (1..maxBands)) OF NeedForGapsNR-r16 {			
NeedForGapsInterFreq-r16[0] SEQUENCE {			
bandNR-r16	Tested band		
gapIndicationInter-r16	no-gap		
}			
}			
needForInterruptionInfoNR-r18 SEQUENCE {			
NeedForInterruptionIntraFreqList-r18 SEQUENCE (SIZE (1..maxNrofServingCells)) OF NeedForInterruptionNR-r18 {			
NeedForInterruptionNR-r18[0] SEQUENCE {			
interruptionIndication-r18	Not checked		
}			
}			
NeedForInterruptionBandListNR-r18 SEQUENCE (SIZE (1..maxBands)) OF NeedForInterruptionNR-r18 {			
NeedForInterruptionNR-r18[0] SEQUENCE {			
interruptionIndication-r18	no-gap-with-interruption		
}			
}			
}			
}			
}			
}			

6.6.24.3.5 Test requirements

Table 6.6.24.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.24.3.5-1: Cell specific test parameters for inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1	FDD			
		Config 2,3	TDD			
TDD configuration		Config 1	Not Applicable			
		Config 2	TDDConf.1.1			
		Config 3	TDDConf.2.1			
$BW_{channel}$	MHz	Config 1,2	10: $N_{RB,c}$ = 52			
		Config 3	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,2	10: $N_{RB,c}$ = 52			
		Config 3	40: $N_{RB,c}$ = 106			

BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD			
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.1 FR1	
			Config 2	SSB.1 FR1		SSB.1 FR1	
			Config 3	SSB.2 FR1		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz		-98+TT		-98+TT	
N_{oc} Note2		dBm/SCS	Config 1,2	-98+TT		-98+TT	
			Config 3	-95+TT		-95+TT	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-94+TT	-94+TT	-Infinity	-91+TT
			Config 3	-91+TT	-91+TT	-Infinity	-88+TT
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3,4,5,6	4+TT	4+TT	-Infinity	7+TT
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4+TT	4+TT	-Infinity	7+TT
Io Note3		dBm/9.36MHz	Config 1,2	-64.59+TT	-64.59+TT	-70.05+TT	-62.26+TT

	dBm/38.16MHz	Config 3	-58.49+TT	-58.49+TT	-63.94+TT	-56.15+TT
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is 2.56 s as derived based on inter-frequency measurement requirements in TS 38.133 [6] clause 9.3.4.

In the test, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots with an interruption ratio between number of interrupted slot over the total number of slots no larger than 1.25%.

In the test UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.24.4 NR SA FR1-FR1 event-triggered reporting without gap without interruption

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Test applicability is missing
- [] still existed in 6.6.24.4.5

6.6.24.4.1 Test purpose

To verify the UE's ability to perform correct reporting of an event within inter-frequency cell search without gap and to verify that UE has no interruption during inter-frequency measurement without gap.

6.6.24.4.2 Test applicability

This test applies to all types of NR UE from release 18 onwards supporting NR NeedForGap capability. The UE is capable of *nr-NeedForGap-Reporting-r16*, *nr-NeedForInterruptionReport-r18* and reports 'no-gap' in NeedForGapsInterFreq-r16 and 'no-gap-no-interruption' in interruptionIndication-r18 for the target frequency given the serving frequency.

6.6.24.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.24.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.24.4.

6.6.24.4.4 Test description

6.6.24.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.6.24.4.4.1-1.

Table 6.6.24.4.4.1-1: NR SA event triggered reporting tests for FR1 for inter-frequency measurement without gap with interruption test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 6.6.24.4.4.1-2.

Table 6.6.24.4.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting for inter-frequency measurement without gap without interruptions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.4.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.6.24.4.4.1-3.
2. Message contents are defined in clause 6.6.24.4.4.3.
3. There are two NR carriers and one cell on each carrier in the test. Cell 1 (Pcell) is on NR RF channel 1, and is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test. Cell 2 (inter neighbour cell) is on NR RF channel 2.

Table 6.6.24.4.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 with NeedForInterruption 'no-gap-no-interruption'

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR Cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR Cell 2	NR Cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.

T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

6.6.24.4.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters for PCell are given in Table 6.6.24.4.4.1-1, 6.6.24.4.4.1-3 and 6.6.24.4.5-1. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The PCell shall continuously scheduled with data in the DL starting from T2 until the UE has sent the measurement report during T2.

NR RF channel 1 and NR RF channel 2 should be selected such that UE reports ‘no-gap’ and ‘no-gap-no-interruption’ for the target frequency on NR RF channel 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.24.4.5-1.

3. SS shall transmit an *RRCReconfiguration* message with *needForGapsConfigNR-r16* and *needForInterruptionConfigNR-r18* enabled.

4. The UE shall transmit *RRCReconfigurationComplete* message with *NeedForGapsInterFreq-r16* set to ‘no-gap’ and *interFreq-needForInterruption-r18* set to ‘no-gap-no-interruption’.

5. SS shall transmit an *RRCReconfiguration* message.

6. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

7. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.24.4.5-1. T2 start.

8. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

9. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than [202]ms and if UE transmits ACK/NACK for the corresponding PDSCH scheduled in PCell in all slots from T2, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or DTX in PCell is observed bfrom T2, then the number of failure tests is increased by one.

10. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

    - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

11. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

12. Depending on the choice in Step 10, the SS:
    - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED

with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.24.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.24.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, SSB.5 FR1 and SMTC.5 for configuration 6.6.24.4-1 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.5 FR1 and SMTC.4 and synchronous cells for configuration 6.6.24.4-2 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.6 FR1, SMTC.4 and synchronous cells for configuration 6.6.24.4-3 Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ

Table 6.6.24.4.4.3-2: *RRCReconfiguration* (step 3)

Derivation Path: Table H.3.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	Not present		
NeedForGapsConfigNR-r16 CHOICE {			
setup SEQUENCE{			
requestedTargetBandFilterNR-r16 SEQUENCE (SIZE (1..maxBands)) OF FreqBandIndicatorNR {	1 entries		
FreqBandIndicatorNR[0]	tested band		
}			
}			
needForInterruptionConfigNR-r18	enabled		
}			
}			
}			

Table 6.6.24.4.4.3-3: ***RRCConnectionReconfigurationComplete*** **(step 4)**

Derivation Path: TS 38.508 [25], Table 4.6.1-14			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfigurationComplete ::= SEQUENCE {			
rrc-TransactionIdentifier	Not checked		
criticalExtensions CHOICE {			
rrcReconfigurationComplete SEQUENCE {			
needForGapsInfoNR-r16 SEQUENCE {			

NeedForGapsIntraFreqList-r16 SEQUENCE (SIZE (1..maxNrofServingCells)) OF NeedForGapsIntraFreq-r16 {			
NeedForGapsIntraFreq-r16[0] SEQUENCE {			
servCellId-r16	0		
gapIndicationIntra-r16	Not checked		
}			
NeedForGapsBandListNR-r16 SEQUENCE (SIZE (1..maxBands)) OF NeedForGapsNR-r16 {			
NeedForGapsInterFreq-r16[0] SEQUENCE {			
bandNR-r16	Tested band		
gapIndicationInter-r16	no-gap		
}			
}			
needForInterruptionInfoNR-r18 SEQUENCE {			
NeedForInterruptionIntraFreqList-r18 SEQUENCE (SIZE (1..maxNrofServingCells)) OF NeedForInterruptionNR-r18 {			
NeedForInterruptionNR-r18[0] SEQUENCE {			
interruptionIndication-r18	Not checked		
}			
}			
NeedForInterruptionBandListNR-r18 SEQUENCE (SIZE (1..maxBands)) OF NeedForInterruptionNR-r18 {			
NeedForInterruptionNR-r18[0] SEQUENCE {			
interruptionIndication-r18	no-gap-no-interruption		
}			
}			
}			
}			
}			
}			

6.6.24.4.5 Test requirements

Table 6.6.24.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.24.4.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with NeedForInterruption 'no-gap-no-interruption'

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	

		Config 2	TRS.1.1 TDD		NA	
		Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1	SR.1.1 FDD			
		Config 2	SR.1.1 TDD			
		Config 3	SR2.1 TDD			
CORESET Reference Channel		Config 1	CR.1.1 FDD			
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.4		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98+TT		-98+TT	
N_{oc} Note2	dBm/SCS	Config 1,2	-98+TT		-98+TT	
		Config 3	-95+TT		-95+TT	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94+TT	-94+TT	-Infinity	-91+TT
		Config 3	-91+TT	-91+TT	-Infinity	-88+TT
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4+TT	4+TT	-Infinity	7+TT
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4+TT	4+TT	-Infinity	7+TT
Io Note3	dBm/9.36MHz	Config 1,2	-64.59+TT	-64.59+TT	-70.05+TT	-62.26+TT
	dBm/38.16MHz	Config 3	-58.49+TT	-58.49+TT	-63.94+TT	-56.15+TT
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [200] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

During T2, UE shall send HARQ-ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots.

The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to read the neighbour cell SSB index in this test.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.24.5 NR SA FR1 event-triggered reporting without gap without interruption

Editor's Note: This test case is incomplete in following aspects:

TT analysis is missing.

Test applicability is missing.

6.6.24.5.1 Test purpose

To verify the UE's ability to perform correct reporting of an event within intra-frequency cell search and to verify that UE has no interruption during intra-frequency measurement without gap.

6.6.24.5.2 Test applicability

This test applies to all types of NR UE from release 18 onwards supporting CSI-RS-based RLM, BWP operation without bandwidth restriction and NR NeedForGap capability. The UE is capable of *nr-NeedForGap-Reporting-r16*, *nr-NeedForInterruptionReport-r18* and reports ‘no-gap’ in NeedForGapsIntraFreq-r16 and ‘no-gap-no-interruption’ in interruptionIndication-r18.

6.6.24.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.24.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.24.5.

6.6.24.5.4 Test description

6.6.24.5.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 6.6.24.5.4.1-1.

Table 6.6.24.5.4.1-1: NR SA FR1 event-triggered reporting without gap without interruptions test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

Configure the test equipment and the DUT according to the parameters in Table 6.6.24.5.4.1-2.

Table 6.6.24.5.4.1-2: Initial conditions for NR SA FR1 event-triggered reporting without gap without interruptions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.4.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 6.6.24.5.4.1-3.
2. Message contents are defined in clause 6.6.24.5.4.3.
3. Two cells are deployed in the test, which are FR1 PCell(Cell 1) and FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 6.6.24.54.1-3: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

6.6.24.5.4.2 Test procedure

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table 6.6.24.5.4.1-1, 6.6.24.5.4.1-3 and 6.6.24.5.5-1. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is

indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The PCell shall continuously scheduled with data in the DL starting from T1 until the UE has sent the measurement report during T2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

The UE is capable of measurements without gaps with interruption and report 'no-gap' through NeedForGapsIntraFreq-r16 and 'no-gap-no-interruption' in interruptionIndication-r18 for PCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.24.5.5-1.

3. SS shall transmit an *RRCReconfiguration* message with *needForGapsConfigNR-r16* and *needForInterruptionConfigNR-r18* enabled.

4. The UE shall transmit *RRCReconfigurationComplete* message with *NeedForGapsIntraFreq-r16* set to 'no-gap' and *intraFreq-needForInterruption-r18* set to 'no-gap-without-interruption'.

5. SS shall transmit an *RRCReconfiguration* message.

6. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

7. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

8. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.24.5.5-1. T2 start.

9. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 802ms and if UE transmits ACK/NACK for the corresponding PDSCH scheduled in PCell in all slots from T2, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or DTX in PCell is observed bfrom T2, then the number of failure tests is increased by one.

10. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

    - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

11. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

12. Depending on the choice in Step 10, the SS:
    - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.24.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.24.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions (step 5)	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 1 and Synchronous cells for Config 1 and 2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC pattern 1 and Synchronous cells for Config 3 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ

Table 6.6.24.5.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 configuration	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

Condition	Explanation
BWP-Id1	Active BWP (BWP2)

Table 6.6.24.5.4.3-3: *RRCReconfiguration* (step 3)

Derivation Path: Table H.3.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	Not present		
NeedForGapsConfigNR-r16 CHOICE {			
setup SEQUENCE{			
requestedTargetBandFilterNR-r16 SEQUENCE (SIZE (1..maxBands)) OF FreqBandIndicatorNR {	1 entries		
FreqBandIndicatorNR[0]	tested band		
}			

}			
needForInterruptionConfigNR-r18	enabled		
}			
}			
}			

Table 6.6.24.5.4.3-4: ***RRCConnectionReconfigurationComplete*** **(step 4)**

Derivation Path: TS 38.508 [25], Table 4.6.1-14			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfigurationComplete ::= SEQUENCE {			
rrc-TransactionIdentifier	Not checked		
criticalExtensions CHOICE {			
rrcReconfigurationComplete SEQUENCE {			
needForGapsInfoNR-r16 SEQUENCE {			
NeedForGapsIntraFreqList-r16 SEQUENCE (SIZE (1..maxNrofServingCells)) OF NeedForGapsIntraFreq-r16 {			
NeedForGapsIntraFreq-r16[0] SEQUENCE {			
servCellId-r16	0		
gapIndicationIntra-r16	no-gap		
}			
NeedForGapsBandListNR-r16 SEQUENCE (SIZE (1..maxBands)) OF NeedForGapsNR-r16 {			
NeedForGapsInterFreq-r16[0] SEQUENCE {			
bandNR-r16	Tested band		
gapIndicationInter-r16	Not checked		
}			
}			
needForInterruptionInfoNR-r18 SEQUENCE {			
NeedForInterruptionIntraFreqList-r18 SEQUENCE (SIZE (1..maxNrofServingCells)) OF NeedForInterruptionNR-r18 {			
NeedForInterruptionNR-r18[0] SEQUENCE {			
interruptionIndication-r18	no-gap-without-interruption		
}			
}			
NeedForInterruptionBandListNR-r18 SEQUENCE (SIZE (1..maxBands)) OF NeedForInterruptionNR-r18 {			
NeedForInterruptionNR-r18[0] SEQUENCE {			
interruptionIndication-r18	Not checked		
}			
}			
}			
}			
}			
}			

6.6.24.5.5 Test requirements

Table 6.6.24.5.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.24.5.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	

		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.2	
Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.2	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98+TT			
		2	-98+TT			
		3	-95+TT			
N_{oc} Note 2	dBm/15 kHz	1	-98+TT			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4+TT	-1.46+TT	-Infinity	-1.46+TT
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4+TT	4+TT	-Infinity	4+TT
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94+TT	-94+TT	-Infinity	-94+TT
		2	-94+TT	-94+TT	-Infinity	-94+TT
		3	-91+TT	-91+TT	-Infinity	-91+TT
Io	dBm/9.36 MHz	1	-64.60+TT	-62.25+TT	-64.60+TT	-62.25+TT
	dBm/9.36 MHz	2	-64.60+TT	-62.25+TT	-64.60+TT	-62.25+TT
	dBm/38.16 MHz	3	-58.50+TT	-56.16+TT	-58.50+TT	-56.16+TT
Propagation Condition		1, 2, 3	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

UE is not allowed to cause interruption during intra-frequency measurement without gap.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.25 SA NR - E-UTRAN event-triggered without measurement gaps

6.6.25.0 Minimum conformance requirements

6.6.25.0.1 Minimum conformance requirements for NR – E-UTRAN FDD measurements when no DRX is used

The requirements are applicable for NR−E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements when no DRX is used.

The UE shall be able to identify a new detectable FDD cell within $T_{Identify,\ E\text{-}UTRAN\ FDD}$ according to the following expression:

$$T_{\mathrm{Identify,E-UTRAN\ FDD}} = T_{\mathrm{BasicIdentify}} \cdot \frac{[480]}{T_{\mathrm{Inter1}}} \cdot \mathrm{CSSF}_{\mathrm{interRAT}} \cdot K_{\mathrm{P}} \quad ms$$

where:

- $T_{BasicIdentify}$ = [480 ms]
- T_{Inter1} is defined in TS 38.133 [6] clause 9.4.8.1
- $CSSF_{interRAT}$ = [$CSSF_{outside_gap,i}$ in TS 38.133 [6] clause 9.1.5.1]
- K_p is the scaling factor due to overlapping between EMW and SMTC, measurement gap, or SSB/CSI-RS configured for RLM/BFD/CBD/L1-RSRP measurement. K_p =1 if the measurement is performed outside EMW or if EMW is fully non-overlapped with SMTC, SSB/CSI-RS configured for RLM, BFD, CBD or L1-RSRP measurement and measurement gap. Otherwise, $K_p = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:
  - For a window W of duration max(EMW period, SMTC period, MGRP, T_{SSB}, $T_{CSI\text{-}RS}$), where SMTC period follows *smtc1* if high layer in TS 38.331 [13] signaling of *smtc2* is not present on the same carrier frequency. Otherwise, SMTC period follows *smtc2*, $T_{SSB}/T_{CSI\text{-}RS}$ is the periodicity of SSB/CSI-RS configured for RLM/BFD/CBD/L1-RSRP measurement on the same carrier frequency, and starting from the beginning of any SMTC occasion.
  - N_{total} is the total number of EMW occasions within the window W, including those overlapped with SMTC, measurement gap, or SSB/CSI-RS configured for RLM/BFD/CBD/L1-RSRP measurement, and
  - $N_{available}$ is the number of EMW occasions that are not overlapped with any SMTC, measurement gap, or SSB/CSI-RS configured for RLM/BFD/CBD/L1-RSRP measurement within the window W, after accounting for EMW collisions by applying the EMW collision rule in TS 38.133 [6] section 9.4.8.2.
  - No requirement applies for the measurement when $N_{available}$ = 0.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{measure,\ E\text{-}UTRAN\ FDD}$ defined in Table 6.6.25.0.1-1.

Table 6.6.25.0.1-1: Measurement period and measurement bandwidth configuration

Configuration	Physical Layer Measurement period: $T_{measure,\ E\text{-}UTRAN\ FDD}$ [ms]	Measurement bandwidth [RB]
0	480 x $CSSF_{interRAT}$ x K_p	6
1 (Note 1)	240 x $CSSF_{interRAT}$ x K_p	50
Note 1: This configuration is optional.		

The UE physical layer shall be capable of reporting RSRP, RSRQ, and RS-SINR measurements to higher layers with measurement period $T_{measure,\ E\text{-}UTRAN\ FDD}$ given by Table 6.6.25.0.1-1.

The normative reference for this requirement is TS 38.133 [6] clauses 9.4.8.1, 9.4.8.2 and 9.4.8.3.

6.6.25.0.2 Minimum conformance requirements for NR – E-UTRAN TDD measurements when no DRX is used

The requirements are applicable for NR−E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements when no DRX is used.

The UE shall be able to identify a new detectable TDD cell within $T_{Identify,\ E\text{-}UTRAN\ TDD}$ according to the following expression:

- When configuration 0 or configuration 1 in Table 6.6.25.0.2-1 is applied,

$$T_{\mathrm{Identify,E-UTRAN\ TDD}} = T_{\mathrm{BasicIdentify}} \cdot \frac{[480]}{T_{\mathrm{Inter1}}} \cdot CSSF_{\mathrm{interRAT}} \cdot K_{\mathrm{P}} \quad ms$$

- When configuration 2 or configuration 3 in Table 6.6.25.0.2-1 is applied,

$$T_{\mathrm{Identify,E-UTRAN\ TDD}} = T_{\mathrm{BasicIdentify}} \cdot \frac{[480]}{T_{\mathrm{Inter1}}} \cdot CSSF_{\mathrm{interRAT}} \cdot K_{\mathrm{P}} + 240 \cdot \mathrm{CSSF}_{\mathrm{interRAT}} \cdot K_{\mathrm{P}} \quad ms$$

where:

- $T_{BasicIdentify}$ = [480 ms]
- T_{Inter1} is defined in TS 38.133 [6] clause 9.4.8.1
- $CSSF_{interRAT}$ = [$CSSF_{outside_gap,i}$ in TS 38.133 [6] clause 9.1.5.1]
- K_p is the scaling factor due to overlapping between EMW and SMTC, measurement gap, or SSB/CSI-RS configured for RLM/BFD/CBD/L1-RSRP measurement. K_p =1 if the measurement is performed outside EMW or if EMW is fully non-overlapped with SMTC, SSB/CSI-RS configured for RLM, BFD, CBD or L1-RSRP measurement and measurement gap. Otherwise, $K_p = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:
  - For a window W of duration max(EMW period, SMTC period, MGRP, T_{SSB}, $T_{CSI\text{-}RS}$), where SMTC period follows *smtc1* if high layer in TS 38.331 [13] signaling of *smtc2* is not present on the same carrier frequency. Otherwise, SMTC period follows *smtc2*, T_{SSB}/$T_{CSI\text{-}RS}$ is the periodicity of SSB/CSI-RS configured for RLM/BFD/CBD/L1-RSRP measurement on the same carrier frequency, and starting from the beginning of any SMTC occasion
  - N_{total} is the total number of EMW occasions within the window, including those overlapped with SMTC, measurement gap, or SSB/CSI-RS configured for RLM/BFD/CBD/L1-RSRP measurement, and
  - $N_{available}$ is the number of EMW occasions that are not overlapped with any SMTC, measurement gap, or SSB/CSI-RS configured for RLM/BFD/CBD/L1-RSRP measurement within the window W, after accounting for EMW collisions by applying the EMW collision rule in TS 38.133 [6] section 9.4.8.2.
  - No requirement applies for the measurement when $N_{available}$ = 0.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{Measure, E\text{-}UTRAN\ TDD}$ defined in Table 6.6.25.0.2-1.

Table 6.6.25.0.2-1: $T_{Measure, E\text{-}UTRAN\ TDD}$ for different configurations

Configuration	Measurement bandwidth (RB)	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		$T_{Measure, E\text{-}UTRAN\ TDD}$ (ms)
		DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760\,T_s$	$20480\,T_s$	[480 x $CSSF_{interRAT}$ x K_p]
1 (Note 1)	50	2	2	$19760\,T_s$	$20480\,T_s$	[240 x $CSSF_{interRAT}$ x K_p]
2	6	1	3	$19760\,T_s$	$20480\,T_s$	[720 x $CSSF_{interRAT}$ x K_p]
3 (Note 1)	50	1	3	$19760\,T_s$	$20480\,T_s$	[480 x $CSSF_{interRAT}$ x K_p]
Note 1: This configuration is optional. Note 2: Void						

The UE physical layer shall be capable of reporting RSRP, RSRQ, and RS-SINR measurements to higher layers with measurement period $T_{measure, E\text{-}UTRAN\ TDD}$ given by Table 6.6.25.0.2-1.

The normative reference for this requirement is TS 38.133 [13] clauses 9.4.8.1, 9.4.8.2 and 9.4.8.4.

6.6.25.1 NR SA FR1 - E-UTRAN event-triggered reporting without gap without interruption

Editor's Note: This test case is incomplete in following aspects:

- Test applicability is FFS.
- TT analysis is missing.

6.6.25.1.1 Test purpose

The purpose of this test is to verify that if UE reports "*nogap-noncsg*" via *NeedForGapNCSG-InfoEUTRA-r17*, the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1.

6.6.25.1.2 Test applicability

This test applies to all types of NR UEs supporting "*nogap-noncsg*" via *NeedForGapNCSG-InfoEUTRA-r17* capability from release 18 onwards.

6.6.25.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.25.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.25.1.

6.6.25.1.4 Test description

6.6.25.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.25.1.4.1-1.

Table 6.6.25.1.4.1-1: Supported test configurations

Configuration	Description
6.6.25.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
6.6.25.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
6.6.25.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
6.6.25.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
6.6.25.1-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6.6.25.1-6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD

NOTE: The UE is only required to be tested in one of the supported test configurations

Test environment parameters are given in Table 6.6.25.1.4.1-2.

Table 6.6.25.1.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.25.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.		

1. The general test parameter settings are set up according to Table 6.6.25.1.4.1-3.

2. Message contents are defined in clause 6.6.25.1.4.3.

3. There are two cells: Cell 1 and Cell 2. Cell 1 (NR PCell) is used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test. Cell 2 (inter-RAT E-UTRAN neighbour cell) is configured according to TS 36.521-3 [26] Annex C.0 and C.1.

Table 6.6.25.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables 6.6.25.1.5-1 and 6.6.25.1.5-2.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Effective Measurement Window (EMW) Id		0	As specified in TS 38.133 [6] Table 9.4.8.2-1
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on Cell 1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for RSRP measurement on Cell 2 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table 6.6.25.1.5-1			

6.6.25.1.4.2 Test procedure

In the measurement control information from the PCell, it is indictated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 6.6.25.1.5-1.
3. SS shall transmit *RRCReconfiguration* message to configure Event B2 triggered measurement report.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. T1 starts. SS continuously schedules the UE to receive PDSCH on Pcell, and monitors corresponding ACK/NACK feedbacks sent by the UE.
6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.25.1.5-1. T2 starts.
7. UE shall transmit *MeasurementReport* message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 3842ms, and ACK/NACKs are observed by the SS for the corresponding PDSCHs scheduled in PCell in all slots excluding those symbols as defined in TS 38.133 [6] clause 9.4.8.3.5 or clause 9.4.8.4.5, the number of successful tests is increased by one. If the UE fails to report the events within the overall measured delays requirements, or DTX in PCell is observed by the SS excluding those symbols as defined in TS 38.133 [6] clause 9.4.8.3.5 or clause 9.4.8.3.4.5, the number of failure tests is increased by one.
8. After the SS receive the *MeasurementReport* message in step 7 or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

9. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
10. Depending on the choice in Step 8, the SS:

    - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),

    OR

    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.25.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 6.6.25.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-RAT Table H.3.1-4A Table H.3.1-5 with condition INTER-RAT Table H.3.1-7 with condition INTER-RAT
Specific message contents exceptions for Cell 1	Table H.3.1-3 with condition INTRA-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Specific message contents exceptions for Cell 2	Table H.3.1-3A

6.6.25.1.5 Test requirement

Table 6.6.25.1.5-1 and Table 6.6.25.1.5-2 define the primary level settings including test tolerances for all tests.

Table 6.6.25.1.5-1: FR1 PCell specific test parameters

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 4	FDD	
			2, 3, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
BWchannel		MHz	1, 4	10: $N_{PRB,c}$ = 52 (FDD)	
			2, 5	10: $N_{PRB,c}$ = 52 (TDD)	
			3, 6	40: $N_{PRB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern[Note 1]			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note 2]		dBm/15 KHz	1, 2, 3, 4, 5, 6	-104+TT	
N_{oc}[Note 2]		dBm/SCS	1, 2, 4, 5	-104+TT	
			3, 6	-101+TT	
$\hat{E}s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	16+TT	0+TT
$\hat{E}s/Iot$[Note 3]		dB	1, 2, 3, 4, 5, 6	16+TT	0+TT
SS-RSRP[Note 3]		dBm/SCS	1, 2, 4, 5	-88+TT	-104+TT
			3, 6	-85+TT	-101+TT
SSB_RP[Note 3]		dBm/SCS	1, 2, 4, 5	-88+TT	-104+TT
			3, 6	-85+TT	-101+TT
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5	-59.94+TT	-73.04+TT

	dBm/38.16 MHz	3, 6	-53.84+TT	-66.93+TT
Propagation condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	
Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Ês/Iot, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table 6.6.25.1.5-2: E-UTRAN neighbour cell specific test parameters

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note 1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note 1]		4, 5, 6	1	
BWchannel	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{PRB,c}$ = 25 10 MHz: $N_{PRB,c}$ = 50 20 MHz: $N_{PRB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note 2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note 2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note 2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note 3]				
OCNG_RB[Note 3]				
N_{oc}[Note 4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104+TT	
Ês/N_{oc}	dB	1, 2, 3, 4, 5, 6	-Infinity	17+TT
Ês/Iot[Note 5]	dB	1, 2, 3, 4, 5, 6	-Infinity	17+TT
RSRP[Note 5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87+TT
SCH_RP[Note 5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87+TT
Io[Note 5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-73.21+10log ($N_{PRB,c}$ /50)+TT	-56.12+10log ($N_{PRB,c}$ /50)+TT

Propagation Condition		1, 2, 3, 4, 5, 6	AWGN
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24]. Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively. Note 3: OCNG shall be used such that all cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 5: Ês/Iot, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria are not fulfilled.

During the T1 and T2, UE shall be able to report ACK/NACK for all slots with PDCCH/PDSCH on PCell excluding those symbols as defined in TS 38.133 [6] clause 9.4.8.3.5 or clause 9.4.8.4.5.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.26 LTM Intra-frequency L1-RSRP measurement

6.6.26.0 Minimum conformance requirements

6.6.26.0.1 Minimum conformance requirements for SSB-based intra-frequency L1-RSRP measurement

If a neighbour cell is known according to TS 38.133 [6] clause 9.14.2, the UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ if *deriveSSB-IndexFromCell* is enabled or UE has reported SSB index in L3 measurement report of the same cell. Otherwise, UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}+T_{SSB_time_index_intra}$, where $T_{SSB_time_index_intra}$ is the time period used to acquire the index of the SSB being measured given in TS 38.133 [6] clause 9.2.5.1.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ is defined for FR1 in Table 6.6.26.0.1-1 for UE incapable of [*capability of measurement with RTD>CP*] and in Table 6.6.26.0.1-2 for UE capable of [*capability of measurement with RTD>CP*], where

- M = 1
- P value for SSB resource to be measured is defined as
  - N_{total} / $N_{outside_MG}$ in FR1

    For a window W of duration max ($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any SSB resource occasion:
    - N_{total} is the total number of SSB resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
    - $N_{outside_MG}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion within the window W
    - T_{L1} is periodicity of the target SSB.

If the high layer in TS 38.331 [6] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Longer measurement period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet previous conditions.

Longer measurement period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 6.6.26.0.1-1: Intra-frequency L1-RSRP measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ in FR1 for UE incapable of [*capability of measurement with RTD>CP*]

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{SSB_NBC})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(K *M*P)*max(T_{DRX},T_{SSB_NBC}))
DRX cycle > 320ms	ceil(M*P)*T_{DRX}
Note 1: T_{SSB_NBC} is the periodicity of the neighbour cell SSB-Index configured for intra-frequency L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: K = 1.5. Note 3: The requirements apply when the max RTD between the serving cell and any candidate cell on which UE is required to perform L1-RSRP measurement on the same frequency layer is not larger than CP length of the cell on the frequency layer.	

Table 6.6.26.0.1-2: Intra-frequency L1-RSRP measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ in FR1 for UE capable of [*capability of measurement with RTD>CP*]

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{SSB_NBC}*N_{Layer})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(K *M*P)*max(T_{DRX},T_{SSB_NBC}) *N_{Layer})
DRX cycle > 320ms	ceil(M*P)*T_{DRX}*N_{Layer}
Note 1: T_{SSB_NBC} is the periodicity of the neighbour cell SSB-Index configured for intra-frequency L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. [N_{Layer} = the number of intra-frequency layers configured for L1-RSRP measurement with [*LTM-CSI-ResourceConfig-r18*] + the number of inter-frequency layers without measurement gaps which are configured for L1-RSRP measurement with [*LTM-CSI-ResourceConfig-r18*]]. Note 2: K = 1.5. Note 3: UE shall at least measure neighbour cells which are activated for TCI state within UE capability and additional cells to measure is up to UE implementation.	

The normative reference for this requirement is TS 38.133 [6] clauses 9.14.3.1, 9.14.5, 9.14.6 and 9.14.7.

6.6.26.1 NR SA FR1 Intra-frequency SSB based L1-RSRP measurement

Editor's Note: This test case is incomplete in following aspects:

6.6.26.1.1 Test purpose

To verify that the UE makes correct reporting of intra-frequency SSB based L1-RSRP measurement on neighbour cell in FR1 within L1-RSRP measurement requirements specified in TS 38.133 [6] clause 9.14.

6.6.26.1.2 Test applicability

This test applies to all types of NR UEs supporting intra-frequency L1 measurement and reports for LTM from release 18 and forward. Test 2 is applicable only to UEs supporting *multiCellL1-measRTD-greaterThan-CP-r18*, otherwise Test 1 is applicable.

6.6.26.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.26.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.26.1.

6.6.26.1.4 Test description

6.6.26.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.26.1.4.1-1.

Table 6.6.26.1.4.1-1: Supported test configurations

Test Case ID	Description
6.6.26.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.26.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.26.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Test environment parameters are given in Table 6.6.26.1.4.1-2.

Table 6.6.26.1.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.26.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	-Without LTE link -For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.		

1. The general test parameter settings are set up according to Table 6.6.26.1.4.1-3.
2. Message contents are defined in clause 6.6.26.1.4.3.
3. There are one NR carrier and two cells specified in the tests. Cell 1 (Pcell) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test. Cell 2 (intra neighbour cell) is on the same frequency as the Cell 1.

Table 6.6.26.1.4.1-3: General test parameters

Parameter		Unit	Value		Comment
			Test 1	Test 2	
Active cell			Cell 1		
Neighbouring cell			Cell 2		Cell 2 is the candidate cell
A3-Offset		dB	-6		
Hysteresis		dB	0		
Time To Trigger		ms	0		
Filter coefficient			0		L3 filtering is not used
DRX			OFF		DRX is not used
Time offset between cells			2μs	20μs	The timing of Cell 2 is later than the timing of Cell 1
deriveSSB-IndexFromCell			Enabled		
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	80		Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1		Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1		
	spCellInclusion		N/A		
ltm-ConfigComplete			True		Candidate cell's configuration is complete configuration
T1		s	0.3		

T2	s	≤ 0.5	

6.6.26.1.4.2 Test procedure

There are two tests in the test case, test 1 and test 2:

- In test 1, time offset between cells is within CP length.
- In test 2, time offset between cells is larger than CP length.

If a UE does not support *multiCellL1-measRTD-greaterThan-CP-r18*, it is only required to pass test 1. Otherwise, it is only required to pass test 2.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. SSB_RP of Cell 2 in T1 and T2 are different. No gap patterns are configured in the test case.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 6.6.26.1.5-1.
3. SS shall transmit an *RRCReconfiguration* message to configure Event A3 triggered measurement report.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. The UE shall transmit a *MeasurementReport* message triggered by Event A3 including Cell 2 measurement report with SSB index.
6. SS shall transmit an *RRCReconfiguration* message to configure *LTM-Candidate-r18* for Cell 2. UE is configured with SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports for candidate Cell 2 in PUCCH format 2.
7. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
8. The UE shall transmit L1-RSRP on PUCCH format 2 in Cell 1 with a periodicity of 80 slots.
9. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.26.1.5-1. T2 starts at the beginning of a frame with an odd SFN.
10. The UE shall continue to send valid L1-RSRP reports. The SS shall check the following requirements:

    -R1: the UE shall start to transmit valid reports no later than 100 ms for configuration 1, 2 and no later than 60 ms for configuration 3 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement (Table 6.6.26.1.5-2 for test configurations 1, 2 and Table 6.6.26.1.5-3 for test configuration 3). For candidate Cell 2, the reported L1-RSRP value in T2 shall be larger than the value reported in T1. If the first valid report is received earlier than the specified time, and includes a larger L1-RSRP value of Cell 2, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

    -R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

    -R3: the L1-RSRP value of Cell 2 reported by the UE is compared to the expected L1-RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 6.6.26.1.5-2 for test configurations 1, 2 and in Table 6.6.26.1.5-3 for test configuration 3, or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

11. The SS waits until T2 expires.
12. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

13. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

14. After the RRC connection release, the SS:

- transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),

or:

- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

15. Repeat steps 2-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.26.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 6.6.26.1.4.3-1: Common Exception messages (step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 with condition SSB Index Table H.3.1-7 with conditions INTRA-FREQ, SSB Index
Specific message contents exceptions for Cell 2	Table H.3.1-3 with conditions INTRA-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.6.26.1.4.3-2: ReportConfigNR (a3-Offset) (step 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A3			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-12	The actual value is field value * 0.5 dB	
}			
hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
maxReportCells	1		
reportQuantityRS-Indexes SEQUENCE {			
rsrp	true		
rsrq	false		
sinr	false		
}			
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	true		
}			

}			
}			

Table 6.6.26.1.4.3-3: Common Exception messages (step 6)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.12-1 with condition L1-RSRP Table H.3.12-2 with condition L1-RSRP Table H.3.12-3 Table H.3.12-4 Table H.3.12-6 Table H.3.12-8
Specific message contents exceptiosn for Test Configuration 1	Table H.3.12-5 with condition SCS15 Table H.3.12-9 with conditions FR1, SSB#0, FDD
Specific message contents exceptiosn for Test Configuration 2	Table H.3.12-5 with condition SCS15 Table H.3.12-9 with conditions FR1, SSB#0, TDD, SCS15
Specific message contents exceptiosn for Test Configuration 3	Table H.3.12-5 with condition SCS30 Table H.3.12-9 with conditions FR1, SSB#0, TDD, SCS30

6.6.26.1.5 Test requirement

Table 6.6.26.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.26.1.5-1: Cell specific test parameters

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1			
SSB GSCN			freq1			
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		N/A	
	Config 2		SR.1.1 TDD		N/A	
	Config 3		SR.2.1 TDD		N/A	
CORESET Reference Channel	Config 1		CR.1.1 FDD		N/A	
	Config 2		CR.1.1 TDD		N/A	
	Config 3		CR.2.1 TDD		N/A	
CP length			Normal			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	KHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2	KHz	15			
	Config 3		30			
BWP configuration	Initial DL BWP		DLBWP.0.1			

	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2	dBm/15kHz	-101	-101	-101	-101
	Config 3		-101	-102.2	-101	-102.2
N_{oc} Note2	Config 1,2	dBm/SCS	-101	-101	-101	-101
	Config 3		-98	-99.2	-98	-99.2
$\hat{E}_s/I_{ot}$		dB	-1.76	-0.19	-1.76	-0.19
$\hat{E}_s/N_{oc}$		dB	3	13.5	3	13.5
SSB_RP	Config 1,2	dBm/SCS	-98	-87.5	-98	-87.5
	Config 3	dBm/SCS	-94.99	-85.69	-94.99	-85.69
Io Note3	Config 1,2	dBm/ 9.36MHz	-66.07	-56.44	-66.07	-56.44
	Config 3	dBm/ 38.16MHz	-59.96	-51.54	-59.96	-51.54
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send L1-RSRP report every 80 slots. The UE shall start to report a larger L1-RSRP value of Cell 2 in no later than 20 ms plus 80 slots from the beginning of time period T2. During T2, each L1-RSRP measurement report of Cell 2 shall meet the corresponding absolute accuracy requirement in Table 6.6.26.1.5-2 for test configuration 1, 2 and the corresponding absolute accuracy requirements in Table 6.6.26.1.5-3 for test configuration 3.

Table 6.6.26.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T2
Lowest reported value (Cell 2)	59
Highest reported value (Cell 2)	79

Table 6.6.26.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T2
Lowest reported value (Cell 2)	61
Highest reported value (Cell 2)	81

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.27 LTM Inter-frequency L1-RSRP measurement with measurement gap

6.6.27.0 Minimum conformance requirements

6.6.27.0.1 Minimum conformance requirements for SSB-based inter-frequency L1-RSRP measurement with gap

If an inter-frequency neighbour cell is known according to TS 38.133 [6] clause 9.15.2, the UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_Inter}$ if *deriveSSB-IndexFromCellInter-r17* is enabled or UE has reported SSB index in L3 measurement report of the same cell. Otherwise, UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_inter}+T_{SSB_time_index_inter}$, where $T_{SSB_time_index_inter}$ is the time period used to acquire the index of the SSB being measured given in TS 38.133 [6] clause 9.3.4.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_inter}$ is defined in Table 6.6.27.0.1-1 for FR1, where

- M = 2
- $CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap}$ in TS 38.133 [6] clause 9.1.5.4 for L1-RSRP measurement conducted within measurement gaps.

Table 6.6.27.0.1-1: Inter-frequency L1-RSRP measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_Inter}$ for known cells in FR1

Condition	$T_{L1\text{-}RSRP_Measurement_Period_SSB_Inter}$
No DRX	$Max(T_{report}, Ceil(M * K_{gap}) \times Max(MGRP, SSB\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(T_{report}, Ceil(M \times 1.5 * K_{gap}) \times Max(MGRP, SSB\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(M * K_{gap}) \times DRX\ cycle \times CSSF_{inter}$
Note 1: The definition of K_{gap} is the same as L3 measurement which is a scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. Note 2: If the UE is incapable of [*capability of measurement with RTD>CP*], the requirements apply for the cells configured by *LTM-CSI-ResourceConfig-r18* on which UE is required to perform L1 measurements, when the max RTD among the cells on the same inter-frequency layer is not larger than CP length.	

The normative reference for this requirement is TS 38.133 [6] clauses 9.15.3.1 and 9.15.5.1.

6.6.27.1 NR SA FR1 Inter-frequency SSB based L1-RSRP measurement with measurement gap

Editor's Note: This test case is incomplete in following aspects:

6.6.27.1.1 Test purpose

To verify that the UE makes correct reporting of inter-frequency SSB based L1-RSRP measurement with measurement gap on candidate neighbour cell in FR1 within L1-RSRP measurement requirements specified in TS 38.133 [6] clause 9.15.

6.6.27.1.2 Test applicability

This test applies to all types of NR UE supporting SSB based inter-frequency L1-RSRP measurements with measurement gaps and reports for LTM from release 18 and forward.

6.6.27.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.27.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.27.1.

6.6.27.1.4 Test description

6.6.27.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.27.1.4.1-1.

Table 6.6.27.1.4.1-1: Supported test configurations

Test Case ID	Description
6.6.27.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.27.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.27.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Test environment parameters are given in Table 6.6.27.1.4.1-2.

Table 6.6.27.1.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.27.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	-Without LTE link -For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.		

1. The general test parameter settings are set up according to Table 6.6.27.1.4.1-3.
2. Message contents are defined in clause 6.6.27.1.4.3.
3. There are two NR carriers and one cell on each carrier in the test. Cell 1 (Pcell) is on NR RF channel 1, and is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test. Cell 2 (inter neighbour cell) is on NR RF channel 2.

Table 6.6.27.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Active cell			Cell 1	
Neighbouring cell			Cell 2	Cell 2 is the candidate cell
A3-Offset		dB	-7	Including test tolerance (-1dB) given in Annex F.1.3.2
Hysteresis		dB	0	
Time To Trigger		ms	160	
Filter coefficient			0	L3 filtering is not used
reportQuantityRS-Indexes			rsrp	
maxNrofRS-IndexesToReport			1	
includeBeamMeasurements			True	
DRX			OFF	DRX is not used
Time offset between cells			3 μs	The timing of Cell 2 is later than the timing of Cell 1
Gap Pattern Id			0	
Measurement gap offset		ms	39	
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	80	Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1	Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1	

	spCellInclusion		N/A	
ltm-ConfigComplete			True	Candidate cell's configuration is complete configuration
T1		s	0.3	
T2		s	≤ 0.5	

6.6.27.1.4.2 Test procedure

In CSI measurement configuration, UE is indicated to perform inter-frequency L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively.

Measurement gap pattern configuration defined in Table 6.6.27.1.4.1-3 is provided.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 6.6.27.1.5-1.
3. SS shall transmit an *RRCReconfiguration* message to configure Event A3 triggered measurement report.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. The UE shall transmit a *MeasurementReport* message triggered by Event A3 including Cell 2 measurement report with SSB index.
6. SS shall transmit an *RRCReconfiguration* message to configure *LTM-Candidate-r18* for Cell 2. UE is configured with SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports for candidate Cell 2 in PUCCH format 2.
7. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
8. The UE shall transmit L1-RSRP on PUCCH format 2 in Cell 1 with a periodicity of 80 slots.
9. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.27.1.5-1. T2 starts.
10. The UE shall continue to send valid L1-RSRP reports. The SS shall check the following requirements:

    -R1: the UE shall start to transmit valid reports no later than 160 ms for configuration 1, 2 and no later than 120 ms for configuration 3 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement (Table 6.6.27.1.5-2 for test configurations 1, 2 and Table 6.6.27.1.5-3 for test configuration 3). For candidate Cell 2, the reported L1-RSRP value in T2 shall be larger than the value reported in T1. If the first valid report is received earlier than the specified time and includes a larger L1-RSRP value of Cell 2, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

    -R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

    -R3: the L1-RSRP value of Cell 2 reported by the UE is compared to the expected L1-RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 6.6.27.1.5-2 for test configurations 1, 2 and in Table 6.6.27.1.5-3 for test configuration 3, or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

11. The SS waits until T2 expires.
12. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
13. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
14. After the RRC connection release, the SS:

- transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),

or:

- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

15. Repeat steps 2-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.27.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 6.6.27.1.4.3-1: Common Exception messages (step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ and GAP NEEDED Table H.3.1-5 with condition SSB Index Table H.3.1-6 with conditions gapUE and Pattern #0 Table H.3.1-7 with conditions INTER-FREQ, SSB Index
Specific message contents exceptions for Cell 2	Table H.3.1-3 with condition INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.6.27.1.4.3-2: ReportConfigNR (a3-Offset) (step 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A3			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-14	The actual value is field value * 0.5 dB	
}			
hysteresis	0	0 dB	
timeToTrigger	ms160		
}			
}			
maxReportCells	1		
reportQuantityRS-Indexes SEQUENCE {			
rsrp	true		
rsrq	false		
sinr	false		
}			
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	true		
}			
}			
}			

Table 6.6.27.1.4.3-3: Common Exception messages (step 6)

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.12-1 with condition L1-RSRP Table H.3.12-2 with condition L1-RSRP Table H.3.12-3 Table H.3.12-4 Table H.3.12-6 Table H.3.12-8
Specific message contents exceptiosn for Test Configuration 1	Table H.3.12-5 with condition SCS15 Table H.3.12-9 with conditions FR1, SSB#0, FDD
Specific message contents exceptiosn for Test Configuration 2	Table H.3.12-5 with condition SCS15 Table H.3.12-9 with conditions FR1, SSB#0, TDD, SCS15
Specific message contents exceptiosn for Test Configuration 3	Table H.3.12-5 with condition SCS30 Table H.3.12-9 with conditions FR1, SSB#0, TDD, SCS30

6.6.27.1.5 Test requirement

Table 6.6.27.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.27.1.5-1: Cell specific test parameters

Parameter	Config	Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
SSB GSCN	1~3		freq1		freq2	
Duplex mode	1		FDD			
	2		TDD			
	3		TDD			
TDD Configuration	1		N/A			
	2		TDDConf.1.1			
	3		TDDConf.2.1			
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52			
	2		10: $N_{RB,c}$ = 52			
	3		40: $N_{RB,c}$ = 106			
PDSCH Reference measurement channel	1		SR.1.1 FDD		N/A	
	2		SR.1.1 TDD		N/A	
	3		SR.2.1 TDD		N/A	
RMSI CORESET Reference Channel	1		CR.1.1 FDD		N/A	
	2		CR.1.1 TDD		N/A	
	3		CR.2.1 TDD		N/A	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD		N/A	
	2		CCR.1.1 TDD		N/A	
	3		CCR.2.1 TDD		N/A	
SSB configuration	1		SSB.1 FR1			
	2		SSB.1 FR1			
	3		SSB.2 FR1			
OCNG Patterns	1~3		OP.1		OP.1	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1			
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1			
SMTC configuration	1~3		SMTC.1			
TRS Configuration	1		TRS.1.1 FDD		N/A	
	2		TRS.1.1 TDD		N/A	
	3		TRS.1.2 TDD		N/A	
EPRE ratio of PSS to SSS	1~3	dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						

EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2	1~3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~3	dB	0	0	0	8
$\hat{E}_s/N_{oc}$	1~3	dB	0	0	0	8
SSB RSRP Note3	1,2	dBm/SSB SCS	-94.65	-94.65	-94.65	-86.65
	3		-91.64	-91.64	-91.64	-83.64
Io Note3	1,2	dBm/9.36 MHz	-63.69	-63.69	-63.69	-58.06
	3	dBm/38.16 MHz	-57.58	-57.58	-57.58	-51.96
Propagation condition	1~3		AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 4: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The UE shall send L1-RSRP report every 80 slots. The UE shall start to report a larger L1-RSRP value of Cell 2 in no later than 80 ms plus 80 slots from the beginning of time period T2. During T2, each L1-RSRP measurement report of Cell 2 shall meet the corresponding absolute accuracy requirement in Table 6.6.27.1.5-2 for test configuration 1, 2 and the corresponding absolute accuracy requirements in Table 6.6.27.1.5-3 for test configuration 3.

Table 6.6.27.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T2
Lowest reported value (Cell 2)	60
Highest reported value (Cell 2)	80

Table 6.6.27.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T2
Lowest reported value (Cell 2)	63
Highest reported value (Cell 2)	83

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.6.28 LTM Inter-frequency L1-RSRP measurement without measurement gap

6.6.28.0 Minimum conformance requirements

6.6.28.0.1 Minimum conformance requirements for SSB-based inter-frequency L1-RSRP measurement without gap

When configured by the network and the inter-frequency cell's SSB is completely contained in the DL active BWP, the UE shall be able to perform L1-RSRP measurements without gaps and without interruptions.

If a neighbour cell is known according TS 38.133 [6] clause 9.15.2, the UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_inter_withoutGap}$ if *deriveSSB-IndexFromCellInter-r17* is enabled or UE has reported SSB index in L3 measurement report of the same cell. Otherwise, UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_inter_withoutGap}+T_{SSB_time_index_inter}$, where $T_{SSB_time_index_inter}$ is the time period used to acquire the index of the SSB being measured given in TS38.133 [6] clause 9.3.9.1.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_inter_withoutGap}$ is defined for FR1 in Table 6.6.28.0.1-1, where

- M = 1
- P value for SSB resource to be measured is defined as
  - N_{total} / $N_{outside_MG}$ in FR1

    For a window W of duration max ($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any SSB resource occasion:
    - N_{total} is the total number of SSB resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
    - $N_{outside_MG}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion within the window W
    - T_{L1} is periodicity of the target SSB.

If the high layer in TS 38.331 [13] signalling of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Longer measurement period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet previous conditions.

Longer measurement period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 6.6.28.0.1-1: Measurement delay for inter frequency L1-RSRP measurement without measurement gaps in FR1 for UE capable of [*capability of measurement with RTD>CP*]

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_inter_withoutGap}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{SSB_NBC}*N_{Layer})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(K*M*P)*\max(T_{DRX}, T_{SSB_NBC})*N_{Layer})$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}*N_{Layer}$
Note 1: T_{SSB_NBC} is the periodicity of the neighbour cell SSB-Index configured for intra-frequency L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. N_{Layer} = the number of inter-frequency layers which are configured for L1-RSRP measurement with [*LTM-CSI-ResourceConfig-r18*] and measured without measurement gaps + the number of intra-frequency layers	

	configured for L1-RSRP measurement with [*LTM-CSI-ResourceConfig-r18*].
Note 2:	K = 1.5.
Note 3:	Void.

Table 6.6.28.0.1-2: Measurement delay for inter frequency L1-RSRP measurement without measurement gaps in FR1 for UE incapable of [*capability of measurement with RTD>CP]*

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_inter_withoutGap}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{SSB_NBC})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(K *M*P)*max(T_{DRX},T_{SSB_NBC}))
DRX cycle > 320ms	ceil(M*P)*T_{DRX}
Note 1:	T_{SSB_NBC} is the periodicity of the neighbour cell SSB-Index configured for intra-frequency L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
Note 2:	K = 1.5.
Note 3:	The requirements apply for the cells configured by *LTM-CSI-ResourceConfig-r18* on which UE is required to perform L1 measurements, when the max RTD between the serving cell and the inter-frequency cell whose SSB are completely contained in the DL active BWP is not larger than CP length.

The normative reference for this requirement is TS 38.133 [6] clauses 9.15.3.1, 9.15.6.1, 9.15.6.2 and 9.15.6.3.

6.6.28.1 NR SA FR1 Inter-frequency SSB based L1-RSRP measurement without measurement gap

Editor's Note: This test case is incomplete in following aspects:

6.6.28.1.1 Test purpose

To verify that the UE makes correct reporting of inter-frequency SSB based L1-RSRP measurement without measurement gap on candidate neighbour cell in FR1 within L1-RSRP measurement requirements specified in TS 38.133 [6] clause 9.15.

6.6.28.1.2 Test applicability

This test applies to all types of NR UE supporting SSB based inter-frequency L1-RSRP measurements without measurement gaps and reports for LTM from release 18 and forward. Test 2 is applicable only to UEs supporting *multiCellL1-measRTD-greaterThan-CP-r18*, otherwise Test 1 is applicable.

6.6.28.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.6.28.0.

The normative reference for this requirement is TS 38.133 [6] clause A.6.6.28.1.

6.6.28.1.4 Test description

6.6.28.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.6.28.1.4.1-1.

Table 6.6.28.1.4.1-1: Supported test configurations

Test Case ID	Description
6.6.28.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.6.28.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.6.28.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Test environment parameters are given in Table 6.6.28.1.4.1-2.

Table 6.6.28.1.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.28.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	-Without LTE link -For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.		

1. The general test parameter settings are set up according to Table 6.6.28.1.4.1-3.
2. Message contents are defined in clause 6.6.28.1.4.3.
3. There are two NR carriers and one cell on each carrier in the test. Cell 1 (Pcell) is on NR RF channel 1, and is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test. Cell 2 (inter neighbour cell) is on NR RF channel 2.

Table 6.6.28.1.4.1-3: General test parameters

Parameter		Unit	Value		Comment
			Test 1	Test 2	
Active cell			Cell 1		
Neighbour cell			Cell 2		Cell 2 is candidate cell
RF Channel Number			1: Cell 1 2: Cell 2		
A3-Offset		dB	-7		Including test tolerance (-1dB) given in Annex F.1.3.2
Hysteresis		dB	0		
Time To Trigger		s	0		
Filter coefficient			0		L3 filtering is not used
reportQuantityRS-Indexes			rsrp		
maxNrofRS-IndexesToReport			1		
includeBeamMeasurements			True		
Time offset between cells		µs	2	20	The timing of Cell 2 is later than the timing of Cell 1
DRX			OFF		
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	80		Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1		Report candidate cell's (Cell 2) L1-RSRP measurement results
	nrOfReportedRS-PerCell		n1		
	spCellInclusion		N/A		
ltm-ConfigComplete			True		Candidate cell's configuration is complete configuration
T1		s	0.3		
T2		s	0.5		

6.6.28.1.4.2 Test procedure

In CSI measurement configuration, UE is indicated to perform inter-frequency L1-RSRP measurement on the SSBs and report periodically. The SSB of Cell 2 is completely within UE's active BWP BW. The RBs containing SSB from Cell 1 and Cell 2 should be different in frequency location within the cell bandwidth.

There are two tests in the test case, test 1 and test 2:

- In test 1, time offset between cells is within CP length.

- In test 2, time offset between cells is larger than CP length.

UE not capable of *multiCellL1-measRTD-greaterThan-CP-r18* is only required to pass test 1. Otherwise, it is only required to pass test 2.

The test consists of two successive time periods, with time duration of T1 and T2 respectively. There is no measurement gap configured in the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 6.6.28.1.5-1.
3. SS shall transmit an *RRCReconfiguration* message to configure Event A3 triggered measurement report.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. The UE shall transmit a *MeasurementReport* message triggered by Event A3 including Cell 2 measurement report with SSB index.
6. SS shall transmit an *RRCReconfiguration* message to configure *LTM-Candidate-r18* for Cell 2. UE is configured with SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports for candidate Cell 2 in PUCCH format 2.
7. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
8. The UE shall transmit L1-RSRP on PUCCH format 2 in Cell 1 with a periodicity of 80 slots.
9. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 6.6.28.1.5-1. T2 starts at the beginning of a frame with an even SFN.
10. The UE shall continue to send valid L1-RSRP reports. The SS shall check the following requirements:

    -R1: the UE shall start to transmit valid reports no later than 100 ms for configuration 1, 2 and no later than 60 ms for configuration 3 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement (Table 6.6.28.1.5-2 for test configurations 1, 2 and Table 6.6.28.1.5-3 for test configuration 3). If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

    -R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

    -R3: the L1-RSRP value of Cell 2 reported by the UE is compared to the expected L1-RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 6.6.28.1.5-2 for test configurations 1, 2 and in Table 6.6.28.1.5-3 for test configuration 3, or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

11. The SS waits until T2 expires.
12. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
13. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
14. After the RRC connection release, the SS:

    - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters

Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),

or:

- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

15. Repeat steps 2-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

6.6.28.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 6.6.28.1.4.3-1: Common Exception messages (step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ Table H.3.1-5 with condition SSB Index Table H.3.1-7 with conditions INTER-FREQ, SSB Index
Specific message contents exceptions for Cell 1	Table H.3.6-3 with condition SSB Table H.3.6-10 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2 for configuration 6.6.28.1-1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1 for configuration 6.6.28.1-2 and configuration 6.6.28.1-3
Specific message contents exceptions for Cell 2	Table H.3.1-3 with condition INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5 for configuration 6.6.28.1-1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4 for configuration 6.6.28.1-2 and configuration 6.6.28.1-3

Table 6.6.28.1.4.3-2: ReportConfigNR (a3-Offset) (step 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A3			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-14	The actual value is field value * 0.5 dB	
}			
Hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
maxReportCells	1		
reportQuantityRS-Indexes SEQUENCE {			
rsrp	true		
rsrq	false		
sinr	false		
}			
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	true		
}			
}			
}			

Table 6.6.28.1.4.3-3: CSI-ReportConfig (periodical) (Cell 1)

Derivation path: Table H.3.6-2 with conditions PERIODIC and SS-RSRP			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {			
periodic SEQUENCE {		PERIODIC	
reportSlotConfig CHOICE {			
slot80	7	Periodicity 80 slots and offset 7	SCS30
	2	Periodicity 80 slots and offset 2	SCS15
pucch-CSI-ResourceList SEQUENCE {	1 entry		
(SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
uplinkBandwidthPartId	BWP-Id of active BWP		
pucch-Resource	8	PUCCH-format2 as configured in TS 38.508-1 [14], Table 4.6.3-112	
}			
}			
}			
}			
reportQuantity CHOICE {			
ssb-Index-RSRP	NULL	SS-RSRP	
}			
timeRestrictionForChannelMeasurements	configured		
groupBasedBeamReporting CHOICE {			
disabled SEQUENCE {			
nrofReportedRS	n1		
}			
}			
}			

Table 6.6.28.1.4.3-4: Common Exception messages (step 6)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.12-1 with condition L1-RSRP Table H.3.12-2 with condition L1-RSRP Table H.3.12-3 Table H.3.12-4 Table H.3.12-6 Table H.3.12-8
Specific message contents exceptiosn for Test Configuration 1	Table H.3.12-5 with condition SCS15 Table H.3.12-9 with conditions FR1, SSB#0, FDD
Specific message contents exceptiosn for Test Configuration 2	Table H.3.12-5 with condition SCS15 Table H.3.12-9 with conditions FR1, SSB#0, TDD, SCS15
Specific message contents exceptiosn for Test Configuration 3	Table H.3.12-5 with condition SCS30 Table H.3.12-9 with conditions FR1, SSB#0, TDD, SCS30

6.6.28.1.5 Test requirement

Table 6.6.28.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.6.28.1.5-1: Cell specific test parameters

Parameter		**Unit**	**Cell 1**		**Cell 2**	
			T1	**T2**	**T1**	**T2**
NR RF Channel Number			1		2	
SSB GSCN			freq1		freq2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			

	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		N/A	
	Config 2		SR.1.1 TDD		N/A	
	Config 3		SR.2.1 TDD		N/A	
CORESET Reference Channel	Config 1		CR.1.1 FDD		N/A	
	Config 2		CR.1.1 TDD		N/A	
	Config 3		CR.2.1 TDD		N/A	
CP length			Normal			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration	Config 1		SMTC.2		SMTC.5	
	Config 2,3		SMTC.1		SMTC.4	
SSB Configuration	Config 1,2		SSB.1 FR1		SSB.5 FR1	
	Config 3		SSB.2 FR1		SSB.6 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
BWP configuration	Initial DL BWP		DLBWP.0.1		NA	
	Dedicated DL BWP		DLBWP.1.1		NA	
	Initial UL BWP		ULBWP.0.1		NA	
	Dedicated UL BWP		ULBWP.1.1		NA	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2	dBm/15kHz	-101	-101	-101	-101
	Config 3		-101	-102.2	-101	-102.2
N_{oc} Note2	Config 1,2	dBm/SCS	-101	-101	-101	-101
	Config 3		-98	-99.2	-98	-99.2
$\hat{E}_s/I_{ot}$		dB	-1.76	-0.19	-1.76	-0.19
$\hat{E}_s/N_{oc}$		dB	3	13.5	3	13.5
SSB_RP	Config 1,2	dBm/SCS	-98	-87.5	-98	-87.5
	Config 3	dBm/SCS	-94.99	-85.69	-94.99	-85.69
Io Note3	Config 1,2	dBm/ 9.36MHz	-66.07	-56.44	-66.07	-56.44
	Config 3	dBm/ 38.16MHz	-59.96	-51.54	-59.96	-51.54
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send L1-RSRP report every 80 slots. The UE shall start to report L1-RSRP value of Cell 2 in no later than 20 ms plus 80 slots from the beginning of time period T2. During T2, each L1-RSRP measurement report of Cell 2 shall meet the corresponding absolute accuracy requirements in Table 6.6.28.1.5-2 for test configuration 1, 2 and the corresponding absolute accuracy requirements in Table 6.6.28.1.5-3 for test configuration 3.

Table 6.6.28.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T2
Lowest reported value (Cell 2)	59
Highest reported value (Cell 2)	79

Table 6.6.28.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T2
Lowest reported value (Cell 2)	61
Highest reported value (Cell 2)	81

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

6.7 Measurement performance requirements

6.7.1 SS-RSRP

6.7.1.0 Minimum conformance requirements

6.7.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements

Same as in clause 4.7.1.0.1.

6.7.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements

Same as in clause 4.7.1.0.2.

6.7.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements

Same as in clause 4.7.1.0.3.

6.7.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements

Same as in clause 4.7.1.0.4.

6.7.1.1 Intra-frequency measurements

6.7.1.1.1 NR SA FR1 SS-RSRP absolute measurement accuracy

6.7.1.1.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

6.7.1.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.7.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.1.1.

6.7.1.1.1.4 Test description

6.7.1.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.1.1.1.4.1-1.

Table 6.7.1.1.1.4.1-1: NR SA FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
6.7.1.1.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.1.1.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.1.1.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.1.1.1.4.1-2.

Table 6.7.1.1.1.4.1-2: Initial conditions for SS-RSRP intra frequency absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 6.7.1.1.1.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour in the same frequency and the target cell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

6.7.1.1.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 6.7.1.1.1.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport. The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP. If the value is outside the limits in Table 6.7.1.1.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 6.7.1.1.1.5-1 as appropriate and repeat steps 5-7.

6.7.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.1.1.1.4.3-1: Common Exception messages for NR SA FR1 SS-RSRP absolute measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.1-7
Specific message contents exceptions for Test Configuration 6.7.1.1.1-1	Table H.3.1-3 with Condition SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 6.7.1.1.1-2	Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 6.7.1.1.1-3	Table H.3.1-3 with Condition SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.1.1.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for NR SA FR1 SS-RSRP Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

6.7.1.1.1.5 Test requirement

Table 6.7.1.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 6.7.1.1.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.1.1.1.5-2 for test configurations 1 and 2, and the corresponding absolute accuracy requirements in Table 6.7.1.1.1.5-3 for test configuration 3.

Table 6.7.1.1.1.5-1: NR SA FR1 SS-RSRP measurement accuracy test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Physical cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					

	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRx Cycle		ms	Not Applicable					
TRS Configuration	Config 1		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control Channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1		SSB 1.FR1	SSB.1 FR1	SSB 1.FR1	SSB.1 FR1	SSB 1.FR1	SSB.1 FR1
	Config 2		SSB 1.FR1	SSB.1 FR1	SSB 1.FR1	SSB.1 FR1	SSB 1.FR1	SSB.1 FR1
	Config 3		SSB 2.FR1	SSB.2 FR1	SSB 2.FR1	SSB.2 FR1	SSB 2.FR1	SSB.2 FR1
Time offset with Cell 2	Config 1	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC Configuration	Config 1		SMTC.2					
	Config 2,3		SMTC.1					
OCNG Patterns			OP.1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS		dB	0	0	0	0	0	0

EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	Depending on band group	dBm/15KhZ	-107.5		-88		-114 + Δ_{BG_offset}	
	Config 3	Depending on band group		N/A Note 6		-94		-115 + Δ_{BG_offset}	
N_{oc} Note2	Config 1,2		dBm/SCS	-107.4		-88		Same as Noc/15kHz	
	Config 3	Depending on band group		N/A Note 6		-91		-112 + Δ_{BG_offset}	
$\hat{E}_s/I_{ot}$			dB	2.23	-5.57	2.23	-5.57	0.37	-5.56
$\hat{E}_s/N_{oc}$			dB	6	1.4	6	1.4	3	-0.8
SS-RSRP Note3	Config 1,2	Depending on band group	dBm/SCS	-101.5	-106.1	-82	-86.6	-111 + Δ_{BG_offset}	-114.8 + Δ_{BG_offset}
	Config 3	Depending on band group		N/A Note 6	N/A Note 6	-85	-89.6	-109+ Δ_{BG_offset}	-112.8+ Δ_{BG_offset}
Io Note3	Config 1,2	Depending on band group	dBm/ 9.36MHz	-71.68		-52.18		-80.39+ Δ_{BG_offset}	
	Config 3	Depending on band group	dBm/ 38.16MHz	N/A Note 6		-51.91		-75.12 + Δ_{BG_offset}	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.

Note 6: Subtest 1 is not used when testing with 30kHz SSB SCS.

Table 6.7.1.1.1.5-2: SS-RSRP Intra frequency absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest reported value (Cell 2)	44	60	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	36
			Bands NR_FDD_FR1_B	36
			Bands NR_TDD_FR1_C	37
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	37
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	38
			Bands NR_FDD_FR1_G	39
			Bands NR_FDD_FR1_H	39
Highest reported value (Cell 2)	56	79	NR_FDD_FR1_A, NR_TDD_FR1_A	48
			NR_FDD_FR1_B	48
			NR_TDD_FR1_C	49
			NR_FDD_FR1_D, NR_TDD_FR1_D	49
			NR_FDD_FR1_E, NR_TDD_FR1_E	50
			NR_FDD_FR1_G	51

			NR_FDD_FR1_H	51
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 2)	40	57	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	31
			Bands NR_FDD_FR1_B	32
			Bands NR_TDD_FR1_C	32
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	33
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	33
			Bands NR_FDD_FR1_G	34
			Bands NR_FDD_FR1_H	35
Highest reported value (Cell 2)	61	82	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	52
			Bands NR_FDD_FR1_B	53
			Bands NR_TDD_FR1_C	53
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	54
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	54
			Bands NR_FDD_FR1_G	55
			Bands NR_FDD_FR1_H	56
Note 1: NR operating band groups are as defined in Section 3A.4.1.				

Table 6.7.1.1.1.5-3: SS-RSRP Intra frequency absolute accuracy requirements for the reported values for test configuration 3

Normal Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 2)	N/A	57	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	38
			Bands NR_FDD_FR1_B	38
			Bands NR_TDD_FR1_C	39
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	39
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	40
			Bands NR_FDD_FR1_G	41
			Bands NR_FDD_FR1_H	41
Highest reported value (Cell 2)	N/A	76	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	50
			Bands NR_FDD_FR1_B	50
			Bands NR_TDD_FR1_C	51
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	51
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	52
			Bands NR_FDD_FR1_G	53
			Bands NR_FDD_FR1_H	53
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 2)	N/A	54	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	33
			Bands NR_FDD_FR1_B	34
			Bands NR_TDD_FR1_C	34
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	35
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	35
			Bands NR_FDD_FR1_G	36
			Bands NR_FDD_FR1_H	37
Highest reported value (Cell 2)	N/A	79	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	54
			Bands NR_FDD_FR1_B	55

			Bands NR_TDD_FR1_C	55
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	56
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	56
			Bands NR_FDD_FR1_G	57
			Bands NR_FDD_FR1_H	58
Note 1: NR operating band groups are as defined in Section 3A.4.1.				

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.1.1.2 NR SA FR1 SS-RSRP relative measurement accuracy

6.7.1.1.2.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP relative measurement accuracy is within the specified limits for all bands.

6.7.1.1.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.7.1.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.1.1.

6.7.1.1.2.4 Test description

6.7.1.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.1.1.2.4.1-1.

Table 6.7.1.1.2.4.1-1: NR SA FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
6.7.1.1.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.1.1.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.1.1.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.1.1.2.4.1-2.

Table 6.7.1.1.2.4.1-2: Initial conditions for SS-RSRP intra frequency relative accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 6.7.1.1.2.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour in the same frequency and the target cell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

6.7.1.1.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR* Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 6.7.1.1.2.5-1 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values of Cell 1 and Cell 2 in the periodic MeasurementReport. The SS-RSRP value of Cell 2 reported by the UE is compared to the reported SS-RSRP of Cell 1. If the resulting value is outside the limits in Table 6.7.1.1.2.5-2 or the UE fails to report the measurement value for Cell 1 or Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 6.7.1.1.2.5-1 as appropriate and repeat steps 5-7.

6.7.1.1.2.4.3 Message contents

Message contents are same as in clause 6.7.1.1.1.4.3.

6.7.1.1.2.5 Test requirement

Table 6.7.1.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 6.7.1.1.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.1.1.2.5-2.

Table 6.7.1.1.2.5-1: Same as Table 6.7.1.1.1.5-1 with the following exceptions:

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
N_{oc} Note2	Config 1,2	Depending on band group	dBm/15KhZ	-106		-88		-114 + Δ_{BG_offset}	
	Config 3	Depending on band group		N/A		-94		-114+ Δ_{BG_offset}	
N_{oc} Note2	Config 1,2		dBm/SCS	Same as Noc/15kHz		Same as Noc/15kHz		Same as Noc/15kHz	
	Config 3,6	Depending on band group		N/A		-91		-111 + Δ_{BG_offset}	
$\hat{E}_s/I_{ot}$			dB	1.88	-4.97	1.88	-4.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	2	6	2	3	0
SS-RSRP Note3	Config 1,2	Depending on band group	dBm/SCS	-100	-104	-82	-86	-111 + Δ_{BG_offset}	- 114 + Δ_{BG_offset}
	Config 3	Depending on band group		N/A	N/A	-85	-89	-108 + Δ_{BG_offset}	-111 + Δ_{BG_offset}
Io Note3	Config 1,2	Depending on band group	dBm/ 9.36MHz	-70.05		-52.05		-80.20+ Δ_{BG_offset}	

	Config 3	Depending on band group	dBm/ 38.16MHz	N/A	-51.77	-73.93 + Δ_{BG_offset}

Table 6.7.1.1.2.5-2: SS-RSRP Intra frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	RSRP_x - 8	RSRP_x - 8	RSRP_x - 7
Highest reported value (Cell 2)	RSRP_x - 1	RSRP_x - 1	RSRP_x + 1
Extreme Conditions			
Lowest reported value (Cell 2)	RSRP_x - 8	RSRP_x - 8	RSRP_x - 7
Highest reported value (Cell 2)	RSRP_x - 1	RSRP_x - 1	RSRP_x + 1
RSRP_x is the reported value of Cell 1			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.1.2 Inter-frequency measurements

6.7.1.2.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy

6.7.1.2.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

6.7.1.2.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.7.1.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.1.2.

6.7.1.2.1.4 Test description

6.7.1.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.1.2.1.4.1-1.

Table 6.7.1.2.1.4.1-1: NR SA FR1-FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
6.7.1.2.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.1.2.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.1.2.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.1.2.1.4.1-2.

Table 6.7.1.2.1.4.1-2: Initial conditions for SS-RSRP inter frequency absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] sclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.1.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.

	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

1. Message contents are defined in clause 6.7.1.2.1.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour in a different FR1 frequency and the target cell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

6.7.1.2.1.4.2 Test procedure

Same as in clause 6.7.1.1.1.4.2 but replacing Table 6.7.1.1.1.5-1 and 6.7.1.1.1.5-2 with 6.7.1.2.1.5-1 and 6.7.1.2.1.5-2, respectively.

6.7.1.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.1.2.1.4.3-1: Common Exception messages for NR SA FR1-FR1 SS-RSRP absolute measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.1-6 with condition Pattern #0
Specific message contents exceptions for Test Configuration 6.7.1.2.1-1	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 6.7.1.2.1-2	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 6.7.1.2.1-3	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.1.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for NR SA FR1 SS-RSRP Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

6.7.1.2.1.5 Test requirement

Table 6.7.1.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 6.7.1.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.1.2.1.5-2 for test configurations 1 and 2, and the corresponding absolute accuracy requirements in Table 6.7.1.2.1.5-3 for test configuration 3.

Table 6.7.1.2.1.5-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~3		freq1	freq2	freq1	freq2
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Gap pattern ID			0		0	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 TDD	-	CR.2.1 TDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	-
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 3	1	ms	3		3	
	2,3	µs	3		3	
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						

EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1							
N_{oc} Note2	Depending on band group	1,2	dBm/15 kHz	-94.65	-94.65	(N_{oc} for Cell 2 +8dB)	-115+ Δ_{BG_offset}
N_{oc} Note2	Depending on band group	3	dBm/15 kHz	-96	-96	(N_{oc} for Cell 2 +8dB)	-115+ Δ_{BG_offset}
N_{oc} Note2	Depending on band group	1,2	dBm/SSB SCS	-94.65	-94.65	(N_{oc} for Cell 2 +8dB)	-115+ Δ_{BG_offset}
	Depending on band group	3		-93	-93	(N_{oc} for Cell 2 +8dB)	-112.00+ Δ_{BG_offset}
$\hat{E}_s/I_{ot}$		1~3	dB	10	10	13	-3
SS-RSRP Note3	Depending on band group	1,2,	dBm/SCS	-84.65	-84.65	(RSRP for Cell 2 +24dB)	-118.00+ Δ_{BG_offset}
	Depending on band group	3		-83	-83	(RSRP for Cell 2 +24dB)	-115.00+ Δ_{BG_offset}
Io Note3	Depending on band group	1,2	dBm/ 9.36MHz	56.28	56.28	(Io for Channel 2 +19.45dB)	-85.28+ Δ_{BG_offset}
	Depending on band group	3	dBm/ 38.16MHz	-51.53	-51.53	(Io for Channel 2 +19.45dB)	-79.19+ Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		1~3	dB	10	10	13	-3
Propagation condition		1~3	-	AWGN		AWGN	
Antenna configuration				1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5 The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.
Note 6: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.

Table 6.7.1.2.1.5-2: SS-RSRP Inter frequency absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	62	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	32
		Bands NR_FDD_FR1_B	33
		Bands NR_TDD_FR1_C	33
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	34
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	34
		Bands NR_FDD_FR1_G	35

		Bands NR_FDD_FR1_H	36
Highest reported value (Cell 2)	81	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	45
		Bands NR_FDD_FR1_B	45
		Bands NR_TDD_FR1_C	46
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	46
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	47
		Bands NR_FDD_FR1_G	48
		Bands NR_FDD_FR1_H	48
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	59	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	28
		Bands NR_FDD_FR1_B	28
		Bands NR_TDD_FR1_C	29
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	29
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	30
		Bands NR_FDD_FR1_G	31
		Bands NR_FDD_FR1_H	31
Highest reported value (Cell 2)	84	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	49
		Bands NR_FDD_FR1_B	50
		Bands NR_TDD_FR1_C	50
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	51
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	51
		Bands NR_FDD_FR1_G	52
		Bands NR_FDD_FR1_H	53
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 6.7.1.2.1.5-3: SS-RSRP Inter frequency absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	64	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	35
		Bands NR_FDD_FR1_B	36
		Bands NR_TDD_FR1_C	36
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	37
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	37
		Bands NR_FDD_FR1_G	38
		Bands NR_FDD_FR1_H	39
Highest reported value (Cell 2)	83	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	48
		Bands NR_FDD_FR1_B	48
		Bands NR_TDD_FR1_C	49
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	49
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	50
		Bands NR_FDD_FR1_G	51
		Bands NR_FDD_FR1_H	51
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	61	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	31
		Bands NR_FDD_FR1_B	31

		Bands NR_TDD_FR1_C	32
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	32
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	33
		Bands NR_FDD_FR1_G	34
		Bands NR_FDD_FR1_H	34
Highest reported value (Cell 2)	86	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	52
		Bands NR_FDD_FR1_B	53
		Bands NR_TDD_FR1_C	53
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	54
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	54
		Bands NR_FDD_FR1_G	55
		Bands NR_FDD_FR1_H	56
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.1.2.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy

6.7.1.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP relative measurement accuracy is within the specified limits for all bands.

6.7.1.2.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.7.1.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.1.2.

6.7.1.2.2.4 Test description

6.7.1.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.1.2.2.4.1-1.

Table 6.7.1.2.2.4.1-1: NR SA FR1-FR1 SS-RSRP relative measurement accuracy supported test configurations

Test Case ID	Description
6.7.1.2.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.1.2.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.1.2.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.1.2.2.4.1-2.

Table 6.7.1.2.2.4.1-2: Initial conditions for SS-RSRP inter frequency relative accuracy in FR1

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 6.7.1.2.2.4.1-1.	
Propagation conditions	AWGN	As specified in Annex C.2.2.

Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

1. Message contents are defined in clause 6.7.1.2.2.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour in a different FR1 frequency and the target cell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

6.7.1.2.2.4.2 Test procedure

Same as in clause 6.7.1.1.2.4.2 but replacing Table 6.7.1.1.2.5-1 and 6.7.1.1.2.5-2 with 6.7.1.2.2.5-1 and 6.7.1.2.2.5-2, respectively.

6.7.1.2.2.4.3 Message contents

Message contents are same as in Clause 6.7.1.2.1.4.3.

6.7.1.2.2.5 Test requirement

Table 6.7.1.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 6.7.1.2.2.5-1 shall meet the corresponding relative accuracy requirements in Table 6.7.1.2.2.5-2.

Table 6.7.1.2.2.5-1: same as Table 6.7.1.2.1.5-1

Table 6.7.1.2.2.5-2: SS-RSRP Intra frequency relative accuracy requirements for the reported values

	Test 1	**Test 2**
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 2)	SS-RSRP_x - 7	SS-RSRP_x - 31
Highest reported value (Cell 2)	SS-RSRP_x + 7	SS-RSRP_x - 18
Extreme Conditions		
Lowest reported value (Cell 2)	SS-RSRP_x - 9	SS-RSRP_x - 33
Highest reported value (Cell 2)	SS-RSRP_x + 9	SS-RSRP_x - 17
SS-RSRP_x is the reported value of Cell 1		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.2 SS-RSRQ

6.7.2.0 Minimum conformance requirements

6.7.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements

Same as in clause 4.7.2.0.1.

6.7.2.0.2 Inter-frequency SS-RSRQ absolute measurement accuracy requirements

Same as in clause 4.7.2.0.2.

6.7.2.0.3 Inter-frequency SS-RSRQ relative measurement accuracy requirements

Same as in clause 4.7.2.0.3.

6.7.2.1 NR SA FR1 SS-RSRQ measurement accuracy

6.7.2.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRQ measurement accuracy is within the specified limits for all bands.

6.7.2.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.7.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.2.1.

6.7.2.1.4 Test description

6.7.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.2.1.4.1-1.

Table 6.7.2.1.4.1-1: NR SA FR1 SS-RSRQ measurement accuracy supported test configurations

Test Case ID	Description
6.7.2.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.2.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.2.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.2.1.4.1-2.

Table 6.7.2.1.4.1-2: Initial conditions for SS-RSRQ intra frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

1. Message contents are defined in clause 6.7.2.1.4.3.

2. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is an NR FR1 cell in the same frequency as Cell 1. Cell 2 is the target cell for SS-RSRQ measurements. The connection setup is done according to the settings in Annex C.1.3.

6.7.2.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 6.7.2.1.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport. The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 6.7.2.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 6.7.2.1.5-1 as appropriate and repeat steps 5-7.

6.7.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.2.1.4.3-1: Common Exception messages for NR SA FR1 SS-RSRQ measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.1-7
Specific message contents exceptions for Test Configuration 6.7.2.1-1	Table H.3.1-3 with Condition SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 6.7.2.1-2	Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 6.7.2.1-3	Table H.3.1-3 with Condition SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for NR SA FR1 SS-RSRQ Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

6.7.2.1.5 Test requirement

Table 6.7.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 6.7.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.2.1.5-2.

Table 6.7.2.1.5-1: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS Configuration	Config 1		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 2, 3	µs	-	3	-	3	-	3
	Config 1	ms	-	3	-	3	-	3
SMTC configuration	Config 2, 3		SMTC.1					
	Config 1		SMTC.2					
SSB configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								

EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	Depending on band group	dBm/15kHz	-86.5		-101		-114+ Δ_{BG_offset}	
	Config 3	Depending on band group		-92.6		-		-114+ Δ_{BG_offset}	
N_{oc} Note2	Config 1,2	Depending on band group	dBm/SCS	-86.5		-101		-114+ Δ_{BG_offset}	
	Config 3	Depending on band group		-89.6		-		-111+ Δ_{BG_offset}	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note3	Config 1,2	Depending on band group	dBm/SCS	-83.5	-83.5	-103.9	-103.9	-118+Δ_{BG_offset}	-118+ Δ_{BG_offset}
	Config 3	Depending on band group		-86.6	-86.6	-	-	-115+ Δ_{BG_offset}	-115+ Δ_{BG_offset}
SS-RSRQ Note3			dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
Io Note3	Config 1,2	Depending on band group	dBm/9.36MHz	-51.57		-70		-83.28+ Δ_{BG_offset}	
	Config 3	Depending on band group	dBm/38.16MHz	-51.56		-		-76.67+ Δ_{BG_offset}	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.
Note 6: Subtest 2 is not used when testing with 30kHz SSB SCS.
Note 7: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 6.7.2.1.5-2: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

	Test 1	**Test 2**	**Test 3**
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_52	SS-RSRQ_46	SS-RSRQ_44
Highest reported value (Cell 2)	SS-RSRQ_62	SS-RSRQ_60	SS-RSRQ_59
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_49	SS-RSRQ_45	SS-RSRQ_43
Highest reported value (Cell 2)	SS-RSRQ_65	SS-RSRQ_61	SS-RSRQ_60

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.2.2 Inter-Frequency SS-RSRQ measurement accuracy

6.7.2.2.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy

6.7.2.2.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRQ absolute measurement accuracy is within the specified limits for all bands.

6.7.2.2.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.7.2.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.2.2.1.

6.7.2.2.1.4 Test description

6.7.2.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.2.2.1.4.1-1.

Table 6.7.2.2.1.4.1-1: NR SA FR1-FR1 SS-RSRQ measurement accuracy supported test configurations

Test Case ID	Description
6.7.2.2.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.2.2.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.2.2.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.2.2.1.4.1-2.

Table 6.7.2.2.1.4.1-2: Initial conditions for SS-RSRQ inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.2.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

1. Message contents are defined in clause 6.7.2.2.1.4.3.

2. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is an NR FR1 cell in the different frequency as Cell 1. Cell 2 is the target cell for SS-RSRQ measurements. The connection setup is done according to the settings in Annex C.1.1.

6.7.2.2.1.4.2 Test procedure

Same as in clause 6.7.2.1.1.4.2 but replacing Table 6.7.2.1.1.5-1 and 6.7.2.1.1.5-2 with 6.7.2.2.1.5-1 and 6.7.2.2.1.5-2, respectively.

6.7.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.2.2.1.4.3-1: Common Exception messages for NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.1-6 with condition Pattern #0
Specific message contents exceptions for Test Configuration 6.7.2.2.1-1	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 6.7.2.2.1-2	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.1 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 6.7.2.2.1-3	Table H.3.1-3 with Conditions INTER-FREQ MO, SSB.2 FR1 and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.2.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for NR SA FR1 SS-RSRQ Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

6.7.2.2.1.5 Test requirement

Table 6.7.2.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 6.7.2.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.2.2.1.5-2.

Table 6.7.2.2.1.5-1: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					

$BW_{channel}$		Config 1	MHz	10: $N_{RB,c}$ = 52					
		Config 2		10: $N_{RB,c}$ = 52					
		Config 3		40: $N_{RB,c}$ = 106					
Gap pattern ID				0					
BWP configuration		Initial DL BWP		DLBWP.0.1					
		Dedicated DL BWP		DLBWP.1.1					
		Initial UL BWP		ULBWP.0.1					
		Dedicated UL BWP		ULBWP.1.1					
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
		Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
		Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
		Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
		Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
		Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
		Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
TRS Configuration		Config 1		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
		Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
		Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OP.1					
Time offset with Cell 1		Config 2, 3	µs	3					
		Config 1	ms	3					
SMTC configuration		Config 2, 3		SMTC.1					
		Config 1		SMTC.2					
SSB configuration		Config 1,2		SSB.1 in FR1					
		Config 3		SSB.2 in FR1					
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz					
		Config 3		30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	Depending on band group	dBm/15kHz	-81.68	-81.68	-106	-106	-116 + Δ_{BG_offset}	-116 + Δ_{BG_offset}

N_{oc} Note2	Config 3	Depending on band group	dBm/15kHz	-87.80	-87.80	-113	-113	-116+ Δ_{BG_offset}	-116+ Δ_{BG_offset}
N_{oc} Note2	Config 1,2	Depending on band group	dBm/SCS	-81.68	-81.68	-106	-106	-116 + Δ_{BG_offset}	-116 + Δ_{BG_offset}
	Config 3	Depending on band group		-84.8	-84.8	-110	-110	-113+ Δ_{BG_offset}	-113+ Δ_{BG_offset}
$\hat{E}_s/I_{ot}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
$\hat{E}_s/N_{oc}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
SS-RSRP Note3	Config 1,2	Depending on band group	dBm/SCS	-83.43	-83.43	-107.75	-107.75	-113+ Δ_{BG_offset}	-117.75+ Δ_{BG_offset}
	Config 3	Depending on band group		-86.54	-86.54	-111.75	-111.75	-110+ Δ_{BG_offset}	-114.75+ Δ_{BG_offset}
SS-RSRQ Note3			dB	-14.76	-14.76	-14.76	-14.76	-12.56	-14.76
Io Note3	Config 1,2	Depending on band group	dBm/Ch BW	-51.51	-51.51	-75.83	-75.83	-83.28 + Δ_{BG_offset}	-85.83 + Δ_{BG_offset}
	Config 3	Depending on band group		-51.52	-51.52	-76.73	-76.73	-77.19 + Δ_{BG_offset}	-79.73 + Δ_{BG_offset}
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 6.7.2.2.1.5-2: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_52	SS-RSRQ_52	SS-RSRQ_52
Highest reported value (Cell 2)	SS-RSRQ_62	SS-RSRQ_62	SS-RSRQ_62
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_49	SS-RSRQ_49	SS-RSRQ_49
Highest reported value (Cell 2)	SS-RSRQ_65	SS-RSRQ_65	SS-RSRQ_65

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.2.2.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy

6.7.2.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRQ relative measurement accuracy is within the specified limits for all bands.

6.7.2.2.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.7.2.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.2.2.2.

6.7.2.2.2.4 Test description

6.7.2.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.2.2.2.4.1-1.

Table 6.7.2.2.2.4.1-1: NR SA FR1-FR1 SS-RSRQ measurement accuracy supported test configurations

Test Case ID	Description
6.7.2.2.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.2.2.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.2.2.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.2.2.2.4.1-2.

Table 6.7.2.2.2.4.1-2: Initial conditions for SS-RSRQ inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.2.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

1. Message contents are defined in clause 6.7.2.2.2.4.3.

2. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is an NR FR1 cell in the different frequency as Cell 1. Cell 2 is the target cell for SS-RSRQ measurements. The connection setup is done according to the settings in Annex C.1.1.

6.7.2.2.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 6.7.2.2.2.5-1 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport. The SS-RSRQ value of Cell 2 reported by the UE is compared to the SS-RSRQ value of Cell 1 reported by the UE. If the difference between both values is outside the limits in Table 6.7.2.2.2.5-2 or the UE fails to report the measurement value for Cell 2 or Cell 1, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 6.7.2.2.2.5-1 as appropriate and repeat steps 5-7.

6.7.2.2.2.4.3 Message contents

Message contents are same as in Clause 6.7.2.2.1.4.3.

6.7.2.2.2.5 Test requirement

Table 6.7.2.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 6.7.2.2.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.2.2.2.5-2.

Table 6.7.2.2.2.5-1: same as Table 6.7.2.2.1.5-1

Table 6.7.2.2.2.5-2: SS-RSRQ Inter frequency relative accuracy requirements for the reported values

	Test 1	**Test 2**	**Test 3**
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x - 7	SS-RSRQ_x - 7	SS-RSRQ_x - 11
Highest reported value (Cell 2)	SS-RSRQ_x + 7	SS-RSRQ_x + 7	SS-RSRQ_x + 2
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x - 9	SS-RSRQ_x - 9	SS-RSRQ_x – 13
Highest reported value (Cell 2)	SS-RSRQ_x + 9	SS-RSRQ_x + 9	SS-RSRQ_x + 4
SS-RSRQ_x is the reported value of Cell 1			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.3 SS-SINR

6.7.3.0 Minimum conformance requirements

6.7.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements

Same as in clause 4.7.3.0.1.

6.7.3.0.2 Inter-frequency absolute SS-SINR measurement accuracy requirements

Same as in clause 4.7.3.0.2.

6.7.3.0.3 Inter-frequency relative SS-SINR measurement accuracy requirements

Same as in clause 4.7.3.0.3.

6.7.3.1 NR SA FR1 SS-SINR measurement accuracy

6.7.3.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-SINR measurement accuracy is within the specified limits for all bands.

6.7.3.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards, which support ss-SINR-Meas.

6.7.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.3.1.

6.7.3.1.4 Test description

6.7.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.3.1.4.1-1.

Table 6.7.3.1.4.1-1: NR SA FR1 SS-SINR measurement accuracy supported test configurations

Test Case ID	Description
6.7.3.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.3.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.3.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.3.1.4.1-2.

Table 6.7.3.1.4.1-2: Initial conditions for SS-SINR intra frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

1. Message contents are defined in clause 6.7.3.1.4.3.

2. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is an NR FR1 cell in the same frequency as Cell 1. Cell 2 is the target cell for SS-SINR measurements. The connection setup is done according to the settings in Annex C.1.1.

6.7.3.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 6.7.3.1.5-1 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic MeasurementReport. The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 6.7.3.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 6.7.3.1.5-1 as appropriate and repeat steps 5-7.

6.7.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.3.1.4.3-1: Common Exception messages for NR SA FR1 SS-SINR measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 Table H.3.1-7
Specific message contents exceptions for Test Configuration 6.7.3.1-1	Table H.3.1-3 with Condition SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 6.7.3.1-2	Table H.3.1-3 with Condition Synchronous cells and SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 6.7.3.1-3	Table H.3.1-3 with Condition Synchronous cells and SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.3.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for NR SA FR1 SS-SINR Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

6.7.3.1.5 Test requirements

Table 6.7.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-SINR measurement report for each of the tests in Table 6.7.3.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.3.1.5-2

Table 6.7.3.1.5-1: SS-SINR Intra frequency test parameters

Parameter			Unit	Test 1		Test 2	
				Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN				freq1		freq1	
Duplex mode		Config 1		FDD			
		Config 2,3		TDD			
TDD configuration		Config 1		Not Applicable			
		Config 2		TDDConf.1.1			
		Config 3		TDDConf.2.1			
Downlink initial BWP configuration				DLBWP.0.1			
Downlink dedicated BWP configuration				DLBWP.1.1			
Uplink initial BWP configuration				ULBWP.0.1			
Uplink dedicated BWP configuration				ULBWP.1.1			
DRX Cycle configuration			ms	Not Applicable			
TRS configuration		Config 1		TRS.1.1 FDD		TRS.1.1 FDD	
		Config 2		TRS.1.1 TDD	-	TRS.1.1 TDD	-
		Config 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD		SR.1.1 FDD	
		Config 2		SR.1.1 TDD	-	SR.1.1 TDD	-
		Config 3		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD		CR.1.1 FDD	
		Config 2		CR.1.1 TDD	-	CR.1.1 TDD	
		Config 3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD		CCR.1.1 FDD	
		Config 2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
		Config 3		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
Time offset with Cell 1		Config 2, 3	µs	-	3	-	3
		Config 1	ms	-	3	-	3
SMTC configuration		Config 2, 3		SMTC.1			
		Config 1		SMTC.2			
SSB configuration		Config 1,2		SSB.1 FR1			
		Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15			
		Config 3		30			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		Depending on band group	dBm/15kHz	-93		-116+ Δ_{BG_offset}	
N_{oc} Note2	Config 1,2		dBm/SCS	-93.2		Same as Noc for 15kHz	
	Config 3	Depending on band group		-90.2		-113+ Δ_{BG_offset}	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-3.5	-3.5
	Config 1,2	Depending on band group	dBm/SCS	-88.46	-90.34	-119.5+ Δ_{BG_offset}	-119.5+

SS-RSRP Note 3							Δ_{BG_offset}
	Config 3	Depending on band group		-85.65	-87.53	-116.5+ Δ_{BG_offset}	-116.5+ Δ_{BG_offset}
SS-SINR Note3			dB	0	-3.19	-5.1	-5.1
Io Note3	Config 1,2	Depending on band group	dBm/ 9.36MHz	-57.5		-85.28+ Δ_{BG_offset}	
	Config 3	Depending on band group	dBm/ 38.16MHz	-51.59		-79.17+ Δ_{BG_offset}	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 6.7.3.1.5-2: SS-SINR Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 2)	SS-SINR_31	SS-SINR_28
Highest reported value (Cell 2)	SS-SINR_49	SS-SINR_45
Extreme Conditions		
Lowest reported value (Cell 2)	SS-SINR_30	SS-SINR_27
Highest reported value (Cell 2)	SS-SINR_50	SS-SINR_46

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.3.2 Inter-Frequency SS-SINR measurement accuracy

6.7.3.2.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy

6.7.3.2.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-SINR absolute measurement accuracy is within the specified limits for all bands.

6.7.3.2.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards, which support ss-SINR-Meas.

6.7.3.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.3.2.1.

6.7.3.2.1.4 Test description

6.7.3.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.3.2.1.4.1-1.

Table 6.7.3.2.1.4.1-1: NR SA FR1-FR1 SS-SINR measurement accuracy supported test configurations

Test Case ID	Description
6.7.3.2.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.3.2.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.3.2.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.3.2.1.4.1-2.

Table 6.7.3.2.1.4.1-2: Initial conditions for SS-SINR inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.3.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

1. Message contents are defined in clause 6.7.3.2.1.4.3.

2. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is an NR FR1 cell in the different frequency as Cell 1. Cell 2 is the target cell for SS-SINR measurements. The connection setup is done according to the settings in Annex C.1.1.

6.7.3.2.1.4.2 Test procedure

Same as in clause 6.7.3.1.4.2 but replacing Table 6.7.3.1.5-1 and 6.7.3.1.5-2 with 6.7.3.2.1.5-1 and 6.7.3.2.1.5-2, respectively.

6.7.3.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.3.2.1.4.3-1: Common Exception messages for NR SA FR1-FR1 SS-SINR absolute measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.1-6 with condition Pattern #0
Specific message contents exceptions for Test Configuration 6.7.3.2.1-1	Table H.3.1-3 with Conditions INTER-FREQ MO and SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2
Specific message contents exceptions for Test Configuration 6.7.3.2.1-2	Table H.3.1-3 with Conditions INTER-FREQ MO, and Synchronous cells and SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Specific message contents exceptions for Test Configuration 6.7.3.2.1-3	Table H.3.1-3 with Conditions INTER-FREQ MO, and Synchronous cells and SS-SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.3.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for NR SA FR1 SS-SINR Accuracy

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

6.7.3.2.1.5 Test requirements

Table 6.7.3.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-SINR measurement report for each of the tests in Table 6.7.3.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.3.2.1.5-2.

Table 6.7.3.2.1.5-1: SS-SINR Inter frequency test parameters

Parameter		**Unit**	**Test 1**		**Test 2**		**Test 3**	
			Cell 1	**Cell 2**	**Cell 1**	**Cell 2**	**Cell 1**	**Cell 2**
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1		TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	-	TRS.1.1 TDD	-	TRS.1.1 TDD	-
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		SR.1.1 FDD		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	-	SR.1.1 TDD	-	SR.1.1 TDD	-
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-

	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 2, 3	µs	-	3	-	3	-	3
	Config 1	ms	-	3	-	3	-	3
SMTC configuration	Config 2, 3		SMTC.1					
	Config 1		SMTC.2					
SSB configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15					
	Config 3		30					
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)		dB	0	0	0	0	0	0
N_{oc} Note2	Config 1,2	Depending on band group	dBm/15kHz	-88	-88	-108.5	-108.5	-119.5+ Δ_{BG_offset}	-119.5+ Δ_{BG_offset}
N_{oc} Note2	Config 1,2		dBm/SCS	-88	-88	-108.5	-108.5	Same as Noc for 15kHz	Same as Noc for 15kHz
	Config 3	Depending on band group		-85	-85	-105.5	-105.5	-116.5+ Δ_{BG_offset}	116.5+ Δ_{BG_offset}
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	20	20	-3.2	-3.2
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	20	20	-3.2	-3.2
SS-RSRP Note3	Config 1,2	Depending on band group	dBm/SCS	-89.75	-89.75	-88.5	-88.5	-122.7+ Δ_{BG_offset}	-122.7+ Δ_{BG_offset}
	Config 3	Depending on band group		-86.75	-86.75	-85.5	-85.5	-119.7+ Δ_{BG_offset}	-119.7+ Δ_{BG_offset}
SS-SINR Note3			dB	-1.75	-1.75	20	20	-3.2	-3.2
Io Note3	Config 1,2	Depending on band group	dBm/ 9.36MHz	-57.83	-57.83	-60.5	-60.5	-89.85+ Δ_{BG_offset}	-89.85+ Δ_{BG_offset}
	Config 3	Depending on band group	dBm/ 38.16MHz	-51.73	-51.73	-54.41	-54.41	-83.75+ Δ_{BG_offset}	-83.75+ Δ_{BG_offset}
Propagation condition			-	AWGN					
Antenna configuration			-	1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 6.7.3.2.1.5-2: SS-SINR Inter frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-SINR_35	SS-SINR_79	SS-SINR_32
Highest reported value (Cell 2)	SS-SINR_51	SS-SINR_94	SS-SINR_49
Extreme Conditions			
Lowest reported value (Cell 2)	SS-SINR_33	SS-SINR_77	SS-SINR_31
Highest reported value (Cell 2)	SS-SINR_53	SS-SINR_96	SS-SINR_50

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.3.2.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy

6.7.3.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-SINR relative measurement accuracy is within the specified limits for all bands.

6.7.3.2.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards, which support ss-SINR-Meas.

6.7.3.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.3.2.2.

6.7.3.2.2.4 Test description

6.7.3.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.3.2.2.4.1-1.

Table 6.7.3.2.2.4.1-1: NR SA FR1-FR1 SS-SINR measurement accuracy supported test configurations

Test Case ID	Description
6.7.3.2.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.3.2.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.3.2.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.3.2.2.4.1-2.

Table 6.7.3.2.2.4.1-2: Initial conditions for SS-SINR inter frequency accuracy in FR1

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 6.7.3.2.2.4.1-1.	
Propagation conditions	AWGN	As specified in Annex C.2.2.

Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

1. Message contents are defined in clause 6.7.3.2.2.4.3.

2. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is an NR FR1 cell in the different frequency as Cell 1. Cell 2 is the target cell for SS-SINR measurements. The connection setup is done according to the settings in Annex C.1.1.

6.7.3.2.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 6.7.3.2.2.5-1 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic MeasurementReport. The SS- SINR value of Cell 2 reported by the UE is compared to the SS- SINR value of Cell 1 reported by the UE. If the difference between both values is outside the limits in Table 6.7.3.2.2.5-2 or the UE fails to report the measurement value for Cell 2 or Cell 1, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 6.7.3.2.2.5-1 as appropriate and repeat steps 5-7.

6.7.3.2.2.4.3 Message contents

Message contents are same as in Clause 6.7.3.2.1.4.3.

6.7.3.2.2.5 Test requirements

Table 6.7.3.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-SINR measurement report for each of the tests in Table 6.7.3.2.2.5-1 shall meet the corresponding relative accuracy requirements in Table 6.7.3.2.2.5-2

Table 6.7.3.2.2.5-1: same as Table 6.7.3.2.1.5-1

Table 6.7.3.2.2.5-2: SS-SINR Inter frequency relative accuracy requirements for the reported values

	Test 1	**Test 2**	**Test 3**
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-SINR_x - 10	SS-SINR_x - 10	SS-SINR_x - 11
Highest reported value (Cell 2)	SS-SINR_x + 10	SS-SINR_x + 10	SS-SINR_x + 11
Extreme Conditions			
Lowest reported value (Cell 2)	SS-SINR_x - 11	SS-SINR_x - 11	SS-SINR_x - 11
Highest reported value (Cell 2)	SS-SINR_x + 11	SS-SINR_x + 11	SS-SINR_x + 11
SS-SINR_x is the reported value of Cell 1			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.4 L1-RSRP

6.7.4.0 Minimum conformance requirements

6.7.4.0.1 SSB based absolute L1-RSRP measurement accuracy requirements

Same as 4.7.4.0.1.

6.7.4.0.2 SSB based relative L1-RSRP measurement accuracy requirements

Same as 4.7.4.0.2.

6.7.4.0.3 CSI-RS based absolute L1-RSRP measurement accuracy requirements

Same as 4.7.4.0.3.

6.7.4.0.4 CSI-RS based relative L1-RSRP measurement accuracy requirements

Same as 4.7.4.0.4.

6.7.4.1 SSB based L1-RSRP measurements

6.7.4.1.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy

6.7.4.1.1.1 Test purpose

The purpose of this test is to verify that the SSB based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

6.7.4.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.7.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.4.1.

6.7.4.1.1.4 Test description

6.7.4.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.4.1.1.4.1-1.

Table 6.7.4.1.1.4.1-1: NR SA FR1 SSB based L1-RSRP absolute measurement accuracy supported test configurations

Test Case ID	Description
6.7.4.1.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.4.1.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.4.1.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.4.1.1.4.1-2.

Table 6.7.4.1.1.4.1-2: Initial conditions for SSB based L1-RSRP absolute accuracy in FR1

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 6.7.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.4.1.1.4.3.

2. Cell 1 is the NR FR1 cell. Cell 1 is the target for SSB-based L1-RSRP measurements. The UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The connection setup is done according to the settings in Annex C.1.1.

6.7.4.1.1.4.2 Test procedure

The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.7.4.1.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.7.4.1.1.4.1-2.

2. Set the parameters according to T1 in Table 6.7.4.1.1.5-1.

3. The UE shall start sending L1-RSRP report including results of both SSB#0 and SSB#1 every 80 slots.

4. The SS shall check the L1-RSRP reported values of SSB#0 or SSB#1 in the periodic L1-RSRP reports. If the value for the strongest SSB is within the limits in Table 6.7.4.1.1.5-2 or Table 6.7.4.1.1.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 6.7.4.1.1.5-1 as appropriate and repeat steps 3-5.

6.7.4.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.4.1.1.4.3-1: Common Exception messages NR SA SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with conditions SSB and PERIODIC Table H.3.6-10 Table H.3.5-8 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.4.1.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			

failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

6.7.4.1.1.5 Test requirement

Table 6.7.4.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 6.7.4.1.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.4.1.1.5-2 for test configurations 1 and 2, and the corresponding absolute accuracy requirements in Table 6.7.4.1.1.5-3 for test configuration 3.

Table 6.7.4.1.1.5-1: L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD
	3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1	SSB.3 FR1
	2		SSB.3 FR1	SSB.3 FR1
	3		SSB.4 FR1	SSB.4 FR1
OCNG Patterns	1~3		OP.1	OP.1
TRS configuration	1		TRS.1.1 FDD	TRS.1.1 FDD
	2		TRS.1.1 TDD	TRS.1.1 TDD
	3		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1	SMTC.1
reportConfigType	1~3		periodic	periodic
reportQuantity	1~3		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~3		2	2
L1-RSRP reporting period	1~3		slot80	slot80
EPRE ratio of PSS to SSS	1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS				

EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	Depending on band group	1,2	dBm/15kHz	-94.65	-117+ Δ_{BG_offset}
		3		-96.00	117+ Δ_{BG_offset}
N_{oc} Note2		1,2	dBm/SSB SCS	-94.65	-117+ Δ_{BG_offset}
		3		-93.00	-114+ Δ_{BG_offset}
$\hat{E}_s/I_{ot}$		1~3	dB	10	-2.2
SSB RSRP Note3	Depending on band group	1,2	dBm/SSB SCS	-84.65	-119.2 + Δ_{BG_offset}
		3		-83.00	-116.2 + Δ_{BG_offset}
Io Note3	Depending on band group	1,2	dBm/9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
		3	dBm/38.16 MHz	-51.53	-80.90 + Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		1~3	dB	10	-2.2
Propagation condition		1~3		AWGN	AWGN
Antenna configuration		1~3		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 6.7.4.1.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 1)	62	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	31
		Bands NR_FDD_FR1_B	31
		Bands NR_TDD_FR1_C	32
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	32
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	33

		Bands NR_FDD_FR1_F	33
		Bands NR_FDD_FR1_G	34
		Bands NR_FDD_FR1_H	34
Highest reported value (Cell 1)	82	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	44
		Bands NR_FDD_FR1_B	45
		Bands NR_TDD_FR1_C	45
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	46
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	46
		Bands NR_FDD_FR1_F	47
		Bands NR_FDD_FR1_G	47
		Bands NR_FDD_FR1_H	48
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	59	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	26
		Bands NR_FDD_FR1_B	27
		Bands NR_TDD_FR1_C	27
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	28
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	28
		Bands NR_FDD_FR1_F	29
		Bands NR_FDD_FR1_G	29
		Bands NR_FDD_FR1_H	30
Highest reported value (Cell 1)	85	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	49
		Bands NR_FDD_FR1_B	49
		Bands NR_TDD_FR1_C	50
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	50
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	51
		Bands NR_FDD_FR1_F	51
		Bands NR_FDD_FR1_G	52
		Bands NR_FDD_FR1_H	52
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 6.7.4.1.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 3

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	63	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	34
		Bands NR_FDD_FR1_B	34
		Bands NR_TDD_FR1_C	35
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	35
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	36
		Bands NR_FDD_FR1_F	36
		Bands NR_FDD_FR1_G	37
		Bands NR_FDD_FR1_H	37
Highest reported value (Cell 1)	84	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	47
		Bands NR_FDD_FR1_B	48
		Bands NR_TDD_FR1_C	48
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	49
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	49
		Bands NR_FDD_FR1_F	50

		Bands NR_FDD_FR1_G	50
		Bands NR_FDD_FR1_H	51
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	60	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	29
		Bands NR_FDD_FR1_B	30
		Bands NR_TDD_FR1_C	30
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	31
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	31
		Bands NR_FDD_FR1_F	32
		Bands NR_FDD_FR1_G	32
		Bands NR_FDD_FR1_H	33
Highest reported value (Cell 1)	87	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	52
		Bands NR_FDD_FR1_B	52
		Bands NR_TDD_FR1_C	53
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	53
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	54
		Bands NR_FDD_FR1_F	54
		Bands NR_FDD_FR1_G	55
		Bands NR_FDD_FR1_H	55
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.4.1.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy

6.7.4.1.2.1 Test purpose

The purpose of this test is to verify that the SSB based L1-RSRP relative measurement accuracy is within the specified limits for all bands.

6.7.4.1.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.7.4.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.4.1.

6.7.4.1.2.4 Test description

6.7.4.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.4.1.2.4.1-1.

Table 6.7.4.1.2.4.1-1: NR SA FR1 SSB based L1-RSRP relative measurement accuracy supported test configurations

Test Case ID	Description
6.7.4.1.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.4.1.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.4.1.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.4.1.2.4.1-2.

Table 6.7.4.1.2.4.1-2: Initial conditions for SSB based L1-RSRP relative accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.4.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.4.1.2.4.3.

2. Cell 1 is the NR FR1 cell. Cell 1 is the target for SSB-based L1-RSRP measurements. The UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The connection setup is done according to the settings in Annex C.1.1.

6.7.4.1.2.4.2 Test procedure

The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.7.4.1.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.7.4.1.2.4.1-2.

2. Set the parameters according to T1 in Table 6.7.4.1.2.5-1.

3. The UE shall start sending L1-RSRP report including results of both SSB#0 and SSB#1 every 80 slots.

4. The SS shall check the L1-RSRP reported values of SSB#0 and SSB#1 in the periodic L1-RSRP reports. The DIFF-RSRP value of SSB#0 or SSB#1 reported by the UE is compared to the expected DIFF-. If the DIFF-RSRP value is within the limits in Table 6.7.4.1.2.5-2, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 6.7.4.1.2.5-1 as appropriate and repeat steps 3-5.

6.7.4.1.2.4.3 Message contents

Message contents are same as in Clause 6.7.4.1.1.4.3.

6.7.4.1.2.5 Test requirement

Table 6.7.4.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 6.7.4.1.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.4.1.2.5-2.

Table 6.7.4.1.2.5-1: Same as Table 6.7.4.1.1.5-1

Table 6.7.4.1.2.5-2: L1-RSRP relative accuracy requirements for the reported values

	Test 1	Test 2

	All bands	All bands
Normal Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2
Extreme Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.4.2 CSI-RS based L1-RSRP measurements

6.7.4.2.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy

6.7.4.2.1.1 Test purpose

The purpose of this test is to verify that the CSI-RS based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

6.7.4.2.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.7.4.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.4.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.4.2.

6.7.4.2.1.4 Test description

6.7.4.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.4.2.1.4.1-1.

Table 6.7.4.2.1.4.1-1: NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy supported test configurations

Test Case ID	Description
6.7.4.2.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.4.2.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.4.2.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.4.2.1.4.1-2.

Table 6.7.4.2.1.4.1-2: Initial conditions for CSI-RS based L1-RSRP absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.4.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	

	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.4.2.1.4.3.

2. Cell 1 is the NR FR1 cell. Cell 1 is the target for CSI-RS based L1-RSRP measurements. The UE is configured to perform RLM and BFD measurement based on the SSB. The connection setup is done according to the settings in Annex C.1.1.

6.7.4.2.1.4.2 Test procedure

The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.7.4.2.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.7.4.2.1.4.1-2.

2. Set the parameters according to T1 in Table 6.7.4.2.1.5-1.

3. The UE shall start sending L1-RSRP report including results of both CSI-RS#0 and CSI-RS#1 every 80 slots.

4. The SS shall check the L1-RSRP reported values of CSI-RS#0 or CSI-RS#1 in the periodic L1-RSRP reports. If the value for the strongestCSI-RS is within the limits in Table 6.7.4.2.1.5-2 or Table 6.7.4.2.1.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 6.7.4.2.1.5-1 as appropriate and repeat steps 3-5.

6.7.4.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.4.2.1.4.3-1: Common Exception messages EN-DC CSI-RS-based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and CSI-RSRP Table H.3.6-3 with conditions CSI-RS and PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.4.2.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSB.	
detectionResource CHOICE {			
ssb-Index	0		

}			
}			
}			

6.7.4.2.1.5 Test requirement

Table 6.7.4.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 6.7.4.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.4.2.1.5-2 for test configurations 1 and 2, and the corresponding absolute accuracy requirements in Table 6.7.4.2.1.5-3 for test configuration 3.

Table 6.7.4.2.1.5-1: L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD
	3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1	SSB.3 FR1
	2		SSB.3 FR1	SSB.3 FR1
	3		SSB.4 FR1	SSB.4 FR1
OCNG Patterns	1~3		OP.1	OP.1
TRS configuration	1		TRS.1.1 FDD	TRS.1.1 FDD
	2		TRS.1.1 TDD	TRS.1.1 TDD
	3		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1	SMTC.1
CSI-RS	1,4		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
	2,5		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
	3,6		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType	1~3		periodic	periodic
reportQuantity	1~3		cri-RSRP	cri-RSRP
Number of reported RS	1~3		2	2
L1-RSRP reporting period	1~3		slot80	slot80
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS	1~3	dB	0	0

EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	Depending on band group	1,2	dBm/15kHz	-94.65	-117+ Δ_{BG_offset}
		3		-96.00	117+ Δ_{BG_offset}
N_{oc} Note2		1,2	dBm/CSI-RS SCS	-94.65	-117+ Δ_{BG_offset}
		3		-93.00	-114+ Δ_{BG_offset}
$\hat{E}_s / I_{ot}$		1~3	dB	10	-2.2
CSI-RSRP Note3	Depending on band group	1,2	dBm/CSI-RS SCS	-84.65	-119.2 + Δ_{BG_offset}
		3		-83.00	-116.2 + Δ_{BG_offset}
Io Note3	Depending on band group	1,2	dBm/9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
		3	dBm/38.16 MHz	-51.53	-80.90 + Δ_{BG_offset}
$\hat{E}_s / N_{oc}$		1~3	dB	10	-2.2
Propagation condition		1~3		AWGN	AWGN
Antenna configuration		1~3		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 6.7.4.2.1.5-2: Same as Table 6.7.4.1.1.5-2

Table 6.7.4.2.1.5-3: Same as Table 6.7.4.1.1.5-3

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.4.2.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy

6.7.4.2.2.1 Test purpose

The purpose of this test is to verify that the CSI-RS based L1-RSRP relative measurement accuracy is within the specified limits for all bands.

6.7.4.2.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

6.7.4.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.4.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.4.2.

6.7.4.2.2.4 Test description

6.7.4.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.4.2.2.4.1-1.

Table 6.7.4.2.2.4.1-1: NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy supported test configurations

Test Case ID	Description
6.7.4.2.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
6.7.4.2.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
6.7.4.2.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.4.2.2.4.1-2.

Table 6.7.4.2.2.4.1-2: Initial conditions for CSI-RS based L1-RSRP relative accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.4.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.4.2.2.4.3.

2. Cell 1 is the NR FR1 cell. Cell 1 is the target for CSI-RS based L1-RSRP measurements. The UE is configured to perform RLM and BFD measurement based on the SSB. The connection setup is done according to the settings in Annex C.1.1.

6.7.4.2.2.4.2 Test procedure

The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.7.4.2.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.7.4.2.2.4.1-2.

2. Set the parameters according to T1 in Table 6.7.4.2.2.5-1.

3. The UE shall start sending L1-RSRP report including results of both CSI-RS#0 and CSI-RS#1 every 80 slots.

4. The SS shall check the L1-RSRP reported values of CSI-RS#0 and CSI-RS#1 in the periodic L1-RSRP reports. The DIFF-RSRP value of CSI-RS#0 or CSI-RS#1 reported by the UE is compared to the expected DIFF-. If the DIFF-RSRP value is within the limits in Table 6.7.4.2.2.5-2, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 6.7.4.2.2.5-1 as appropriate and repeat steps 3-5.

6.7.4.2.2.4.3 Message contents

Message contents are same as in Clause 6.7.4.2.1.4.3.

6.7.4.2.2.5 Test requirement

Table 6.7.4.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 6.7.4.2.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.4.2.2.5-2.

Table 6.7.4.2.2.5-1: Same as Table 6.7.4.2.1.5-1

Table 6.7.4.2.2.5-2: Same as Table 6.7.4.1.2.5-2

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.5 E-UTRAN RSRP

6.7.5.0 Minimum conformance requirements

6.7.5.0.1 E-UTRAN RSRP absolute accuracy

The measurement period of E-UTRA RSRP in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3 of TS 38.133 [6].

The accuracy requirements of E-UTRA RSRP measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRP Accuracy Requirements in clause 9.1.3 of TS 36.133 [23]:

The requirements for absolute accuracy of RSRP in this clause apply to a cell that has different carrier frequency from the serving cell.

The accuracy requirements in Table 6.7.5.0.1-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 [27] Clause 7.3 for reference sensitivity are fulfilled.

RSRP|dBm according to Annex B.3.3 of TS 36.133 [23] for a corresponding Band.

Table 6.7.5.0.1-1: RSRP Inter frequency absolute accuracy

Accuracy		Conditions			
			Io Note 1 range		
Normal condition	Extreme condition	$\hat{E}_s/I_{ot}$	E-UTRA operating band groups Note 3	Minimum Io	Maximum Io
dB	dB	dB		dBm/15kHz Note 2	dBm/BW$_{Channel}$	dBm/BW$_{Channel}$
±4.5	±9	≥-6 dB	FDD_A, TDD_A	-121	N/A	-70
			FDD_B1, FDD_B2	-120.5	N/A	-70
			FDD_C, TDD_C	-120	N/A	-70
			FDD_D	-119.5	N/A	-70
			FDD_E, TDD_E	-119	N/A	-70

			FDD_F	-118.5	N/A	-70
			FDD_G	-118	N/A	-70
			FDD_H	-117.5	N/A	-70
			FDD_N	-114.5	N/A	-70
±8	±11	≥-6 dB	FDD_A, TDD_A, FDD_B1, FDD_B2, FDD_C, TDD_C, FDD_D, FDD_E, TDD_E, FDD_F, FDD_G, FDD_H, FDD_N	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The condition level is increased by Δ>0, when applicable, as described in Sections B.4.2 and B.4.3 of TS 36.133 [23]. NOTE 3: E-UTRA operating band groups are as defined in Section 3.5 of TS 36.133 [23].						

The reporting range and mapping specified for RSRP measurements in clause 9.1.4 of TS 36.133 [23] shall apply:

The reporting range of RSRP is defined from -156 dBm to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 6.7.5.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 6.7.5.0.1-2: RSRP measurement report mapping

Reported value	Measured quantity value	Unit
RSRP_-17	RSRP< -156	dBm
RSRP_-16	-156 ≤ RSRP< -155	dBm
…	…	…
RSRP_-03	-143 ≤ RSRP< -142	dBm
RSRP_-02	-142 ≤ RSRP< -141	dBm
RSRP_-01	-141 ≤ RSRP< -140	dBm
RSRP_00	RSRP < -140	dBm
RSRP_01	-140 ≤ RSRP < -139	dBm
RSRP_02	-139 ≤ RSRP < -138	dBm
…	…	…
RSRP_95	-46 ≤ RSRP < -45	dBm
RSRP_96	-45 ≤ RSRP < -44	dBm
RSRP_97	-44 ≤ RSRP	dBm

6.7.5.1 NR SA FR1 – E-UTRAN RSRP absolute measurement accuracy

6.7.5.1.1 Test purpose

The purpose of this test is to verify that the inter-RAT E-UTRAN RSRP absolute measurement accuracy is within the specified limits for all bands, when the serving cell is NR FR1 and the target cell is E-UTRA.

6.7.5.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting E-UTRA.

6.7.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.5.1.

6.7.5.1.4 Test description

6.7.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.5.1.4.1-1.

Table 6.7.5.1.4.1-1: test configurations

Test Case ID	Description

6.7.5.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD, E-UTRAN: FDD
6.7.5.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD, E-UTRAN: FDD
6.7.5.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD, E-UTRAN: FDD
6.7.5.1-4	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD, E-UTRAN: TDD
6.7.5.1-5	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD, E-UTRAN: TDD
6.7.5.1-6	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD, E-UTRAN: TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.5.1.4.1-2.

Table 6.7.5.1.4.1-2: initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.7.3	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.5.1.4.3.

2. There are two carriers and two cells specified in the test, where NR Cell 1 is the NR PCell on the NR carrier and Cell 2 is the E-UTRA neighbour cell on the E-UTRA carrier and the target for the measurements.

6.7.5.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 6.7.5.1.5-1 and Table 6.7.5.1.5-2 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the RSRP reported values in the periodic MeasurementReport. The RSRP value of Cell 2 reported by the UE is compared to the expected RSRP. If the value is outside the limits in Table 6.7.5.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 6.7.5.1.5-2 as appropriate and repeat steps 5-7.

6.7.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.5.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-RAT and GAP NEEDED Table H.3.1-3 Table H.3.1-3a Table H.3.1-5 with Condition INTER-RAT Table H.3.1-7 with condition INTER-RAT Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.5.1.4.3-1A: MeasConfig (Test procedure step 3)

Derivation path: Table H.3.1-2 with condition INTER-RAT and GAP NEEDED			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	2 entries		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigInterRAT	ReportConfigE-UTRA-DEFAULT(Periodical)	Table 6.7.5.1.4.3-2	
}			
}			
ReportConfigToAddMod[2] SEQUENCE {		entry 2	
reportConfigId	2		
reportConfig CHOICE {			
reportConfigInterRAT	ReportConfigInterRAT-EVENT	Table 6.7.5.1.4.3-1B	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	2 entries		
MeasIdToAddMod[1] SEQUENCE {		entry 1	
measId	1		
measObjectId	2		
reportConfigId	1		
}			
MeasIdToAddMod[2] SEQUENCE {		entry 2	
measId	2		
measObjectId	2		
reportConfigId	2		
}			
}			
}			

Table 6.7.5.1.4.3-1B: ReportConfigInterRAT-EVENT (Table 6.7.5.1.4.3-1A)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-141 with condition EVENT_B1			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT ::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventB1 SEQUENCE {			
b1-ThresholdEUTRA CHOICE {			
rsrp	97	Set threshold to -44dBm to ensure measId 2 will never be triggered	
}			
}			
}			
}			
}			

}			

Table 6.7.5.1.4.3-2: ReportConfigE-UTRA-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-141 with Condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
reportQuantityCell SEQUENCE {			
rsrq	false		
}			
maxReportCells	2		
}			
}			
}			

6.7.5.1.5 Test requirement

Table 6.7.5.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Tables 6.7.5.1.5-1 and 6.7.5.1.5-2 shall meet the corresponding absolute accuracy requirements in Table 6.7.5.1.5-3.

Table 6.7.5.1.5-1: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52 (FDD)
	Config 2, 5		10: $N_{RB,c}$ = 52 (TDD)
	Config 3, 6		40: $N_{RB,c}$ = 106 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			

EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1, 2, 4, 5	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$[Note3]		dB	17
SS-RSRP[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
Io[Note3]	Config 1, 2, 4, 5	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/38.16 MHz	-52.87
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.7.5.1.5-2: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 2	
			Test 1	Test 2
E-UTRA RF channel number			1	
Duplex mode	Config 1, 2, 3		FDD	
	Config 4, 5, 6		TDD	
TDD special subframe configuration[Note1]	Config 1, 2, 3		N/A	
	Config 4, 5, 6		6	
TDD uplink-downlink configuration[Note1]	Config 1, 2, 3		N/A	
	Config 4, 5, 6		1	
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]			-	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1, 2, 3		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
	Config 4, 5, 6		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]	Config 1, 2, 3		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD	
	Config 4, 5, 6		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				

N_{oc}[Note4]	Depending on band group	dBm/15kHz	-91.65	-117 + Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		dB	10	-3.2
$\hat{E}_s/I_{ot}$[Note5]		dB	10	-3.2
RSRP[Note5]	Depending on band group	dBm/15kHz	-81.65	-120.2+ Δ_{BG_offset}
SCH_RP[Note5]	Depending on band group	dBm/15kHz	-81.65	-120.2+ Δ_{BG_offset}
Io[Note5]	Depending on band group	dBm/Ch BW	-53.45 + 10log($N_{RB,c}$/50)	-87.52+ Δ_{BG_offset} + 10log($N_{RB,c}$/50)
Propagation Condition			AWGN	
Antenna Configuration and Correlation Matrix			1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [23].
Note 7: Void
Note 8: Void.
Note 9: Void
Note 10: Void
Note 11: Δ_{BG_offset} for LTE band group is defined in TS 36.521-3 [26] clause 3.5.1, Table 3.5.1-1A.

Table 6.7.5.1.5-3: SS-RSRP Intra frequency absolute accuracy requirements for the reported values

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	49	FDD_A, TDD_A	14
		FDD_B	15
		TDD_C	15
		FDD_D, TDD_D	16
		FDD_E, TDD_E	16
		FDD_G	17
		FDD_H	18
Highest reported value (Cell 2)	69	FDD_A, TDD_A	27
		FDD_B	27
		TDD_C	28
		FDD_D, TDD_D	28
		FDD_E, TDD_E	29
		FDD_G	30
		FDD_H	30
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	46	FDD_A, TDD_A	10
		FDD_B	10
		TDD_C	11
		FDD_D, TDD_D	11
		FDD_E, TDD_E	12
		FDD_G	13
		FDD_H	13
Highest reported value (Cell 2)	72	FDD_A, TDD_A	31
		FDD_B	32
		TDD_C	32
		FDD_D, TDD_D	33
		FDD_E, TDD_E	33
		FDD_G	34
		FDD_H	35

Note 1: E-UTRA operating band groups are as defined in TS 36.521-3 [26] clause 3.5.1

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.6 E-UTRAN RSRQ

6.7.6.0 Minimum conformance requirements

6.7.6.0.1 E-UTRAN RSRQ absolute accuracy

The measurement period of E-UTRA RSRQ in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3 on TS 38.133 [6].

The accuracy requirements of E-UTRA RSRQ measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRQ Accuracy Requirements in clause 9.1.6 of TS 36.133 [23]:

The requirements for absolute accuracy of RSRQ in this clause apply to a cell that has different carrier frequency from the serving cell.

The accuracy requirements in Table 6.7.6.0.1-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 [27] Clause 7.3 for reference sensitivity are fulfilled.

RSRP|dBm according to Annex B.3.3 of TS 36.133 [23] for a corresponding Band

Table 6.7.6.0.1-1: RSRQ Inter frequency absolute accuracy

Accuracy		Conditions			
			Io [Note 1] range		
Normal condition	Extreme condition	Ês/Iot	E-UTRA operating band groups [Note 4]	Minimum Io	Maximum Io
dB	dB	dB		dBm/15kHz [Note 3]	$dBm/BW_{Channel}$
±2.5	±4	≥-3 dB	FDD_A, TDD_A	-121	-50
			FDD_B1, FDD_B2	-120.5	-50
			FDD_C, TDD_C	-120	-50
			FDD_D	-119.5	-50
			FDD_E, TDD_E	-119	-50
			FDD_F	-118.5	-50
			FDD_G	-118	-50
			FDD_H	-117.5	-50
			FDD_N	-114.5	-50
±3.5	±4	≥-6 dB	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The condition level is increased by Δ>0, when applicable, as described in Sections B.4.2 and B.4.3 of TS 36.133 [23].
NOTE 4: E-UTRA operating band groups are as defined in Section 3.5 of TS 36.133 [23].

The reporting range and mapping specified for RSRQ measurements in clause 9.1.7 of TS 36.133 [23] shall apply:

The reporting range of RSRQ is defined from -34 dB to 2.5 dB with 0.5 dB resolution.

The mapping of measured quantity is defined in table 6.7.6.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 6.7.6.0.1-2: RSRQ measurement report mapping

Reported value	Measured quantity value	Unit
RSRQ_-30	RSRQ < -34	dB
RSRQ_-29	-34 ≤ RSRQ < -33.5	dB
…	…	…
RSRQ_-02	-20.5 ≤ RSRQ < -20	dB
RSRQ_-01	-20 ≤ RSRQ < -19.5	dB

RSRQ_00	RSRQ < -19.5	dB
RSRQ_01	-19.5 ≤ RSRQ < -19	dB
RSRQ_02	-19 ≤ RSRQ < -18.5	dB
…	…	…
RSRQ_32	-4 ≤ RSRQ < -3.5	dB
RSRQ_33	-3.5 ≤ RSRQ < -3	dB
RSRQ_34	-3 ≤ RSRQ	dB
RSRQ_35	-3 ≤ RSRQ < -2.5	dB
RSRQ_36	-2.5 ≤ RSRQ < -2	dB
…	…	…
RSRQ_45	2 ≤ RSRQ < 2.5	dB
RSRQ_46	2.5 ≤ RSRQ	dB

Note: The ranges from RSRQ_-30 to RSRQ_-01 and from RSRQ_35 to RSRQ_46 apply for the UE who can support extended RSRQ range.

6.7.6.1 NR SA FR1 – E-UTRAN RSRQ absolute measurement accuracy

6.7.6.1.1 Test purpose

The purpose of this test is to verify that the inter-RAT E-UTRAN RSRQ absolute measurement accuracy is within the specified limits for all bands, when the serving cell is NR FR1 and the target cell is E-UTRA.

6.7.6.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting E-UTRA.

6.7.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.6.1.

6.7.6.1.4 Test description

6.7.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.6.1.4.1-1.

Table 6.7.6.1.4.1-1: test configurations

Test Case ID	Description
6.7.6.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD, E-UTRAN: FDD
6.7.6.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD, E-UTRAN: FDD
6.7.6.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD, E-UTRAN: FDD
6.7.6.1-4	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD, E-UTRAN: TDD
6.7.6.1-5	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD, E-UTRAN: TDD
6.7.6.1-6	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD, E-UTRAN: TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.6.1.4.1-2.

Table 6.7.6.1.4.1-2: initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.6.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.7.3	
	DUT Part 2Rx	A.3.2.3.4	

	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.6.1.4.3.

2. There are two carriers and two cells specified in the test, where NR Cell 1 is the NR PCell on the NR carrier and Cell 2 is the E-UTRA neighbour cell on the E-UTRA carrier and the target for the measurements.

6.7.6.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 6.7.6.1.5-1 and Table 6.7.6.1.5-2 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the RSRQ reported values in the periodic MeasurementReport. The RSRQ value of Cell 2 reported by the UE is compared to the expected RSRQ. If the value is outside the limits in Table 6.7.6.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 6.7.6.1.5-2 as appropriate and repeat steps 5-7.

6.7.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.6.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-RAT and GAP NEEDED Table H.3.1-3 Table H.3.1-3a Table H.3.1-5 with Condition INTER-RAT Table H.3.1-7 with condition INTER-RAT Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.6.1.4.3-1A: MeasConfig (Test procedure step 3)

Derivation path: Table H.3.1-2 with condition INTER-RAT and GAP NEEDED			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	2 entries		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigInterRAT	ReportConfigE-UTRA-DEFAULT(Periodical)	Table 6.7.6.1.4.3-2	
}			
}			
ReportConfigToAddMod[2] SEQUENCE {		entry 2	

reportConfigId	2		
reportConfig CHOICE {			
reportConfigInterRAT	ReportConfigInterRAT-EVENT	Table 6.7.6.1.4.3-1B	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	2 entries		
MeasIdToAddMod[1] SEQUENCE {		entry 1	
measId	1		
measObjectId	2		
reportConfigId	1		
}			
MeasIdToAddMod[2] SEQUENCE {		entry 2	
measId	2		
measObjectId	2		
reportConfigId	2		
}			
}			
}			

Table 6.7.6.1.4.3-1B: ReportConfigInterRAT-EVENT (Table 6.7.6.1.4.3-1A)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-141 with condition EVENT_B1			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT ::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventB1 SEQUENCE {			
b1-ThresholdEUTRA CHOICE {			
rsrq	34	Set threshold to -3dB to ensure measId 2 will never be triggered	
}			
}			
}			
}			
}			
}			

Table 6.7.6.1.4.3-2: ReportConfigE-UTRA-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-141 with Condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
reportQuantityCell SEQUENCE {			
rsrp	false		
}			
maxReportCells	2		
}			
}			
}			

6.7.6.1.5 Test requirement

Table 6.7.6.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Tables 6.7.6.1.5-1 and 6.7.6.1.5-2 shall meet the corresponding absolute accuracy requirements in Table 6.7.6.1.5-3.

Table 6.7.6.1.5-1: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52 (FDD)
	Config 2, 5		10: $N_{RB,c}$ = 52 (TDD)
	Config 3, 6		40: $N_{RB,c}$ = 106 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1, 2, 4, 5	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$[Note3]		dB	17
SS-RSRP[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP[Note3]	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
Io[Note3]	Config 1, 2, 4, 5	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/38.16 MHz	-52.87
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	$\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.7.6.1.5-2: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 2		
			Test 1	Test 2	Test 3
E-UTRA RF channel number			1		
Duplex mode	Config 1, 2, 3		FDD		
	Config 4, 5, 6		TDD		
TDD special subframe configuration[Note1]	Config 1, 2, 3		N/A		
	Config 4, 5, 6		6		
TDD uplink-downlink configuration[Note1]	Config 1, 2, 3		N/A		
	Config 4, 5, 6		1		
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PDSCH parameters: DL Reference Measurement Channel[Note2]			-		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1, 2, 3		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
	Config 4, 5, 6		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note2]	Config 1, 2, 3		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4, 5, 6		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		
PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note3]					
OCNG_RB[Note3]					
N_{oc}[Note4]	Depending on band group	dBm/15kHz	-83	-104.70	-119.5+ Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		dB	-1.75	-3.2	-3.2
$\hat{E}_s/I_{ot}$[Note5]		dB	-1.75	-3.2	-3.2
RSRP[Note5]	Depending on band group	dBm/15kHz	-84.75	-107.90	-122.7+ Δ_{BG_offset}
RSRQ[Note5]	Depending on band group	dB	-14.76	-15.69	-15.69
Io[Note5]	Depending on band group	dBm/Ch BW	-53 + 10log($N_{RB,c}$ /50)	-75.22 + 10log($N_{RB,c}$ /50)	-90.02+ Δ_{BG_offset} + 10log($N_{RB,c}$ /50)
Propagation Condition			AWGN		
Antenna Configuration and Correlation Matrix			1x2		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 5:	$\hat{E}_s/I_{ot}$, RSRP, RSRQ and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6:	E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [23].
Note 7:	Void
Note 8:	Void
Note 9:	Void
Note 10:	Void
Note 11:	Δ_{BG_offset} for LTE band group is defined in TS 36.521-3 [26] clause 3.5.1, Table 3.5.1-1A.

Table 6.7.6.1.5-3: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3 All bands
Lowest reported value (Cell 2)	4	0	0
Highest reported value (Cell 2)	16	16	16
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest reported value (Cell 2)	1	0	0
Highest reported value (Cell 2)	19	17	17

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.7 E-UTRAN RS-SINR

6.7.7.0 Minimum conformance requirements

6.7.7.0.1 E-UTRAN RS-SINR absolute accuracy

The measurement period of E-UTRA RS-SINR in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3 of TS 38.133 [6].

The accuracy requirements of E-UTRA RS-SINR measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RS-SINR Accuracy Requirements in clause 9.1.17.3 of TS 36.133 [23]:

The reporting range and mapping for E-UTRA RS-SINR measurements shall be the same as specified for RS-SINR measurements in clause 9.1.17.1 of TS 36.133 [23]:

The requirements for absolute accuracy of intra-frequency RS-SINR in this clause apply to a cell on the same frequency as that of the serving cell.

The accuracy requirements in Table 6.7.7.0.1-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in 36.101 [27] Clause 7.3 for reference sensitivity are fulfilled.

RSRP|dBm according to Annex B.3.18 of TS 36.133 [23] for a corresponding Band.

Table 6.7.7.0.1-1: Intra-frequency RS-SINR absolute accuracy

Accuracy		Conditions			
Normal condition	Extreme condition	Ês/Iot	Io Note 1 range		
			E-UTRA operating band groups Note 4	Minimum Io	Maximum Io

dB	dB	dB		dBm/15kHz Note 3	dBm/BW$_{Channel}$
±3.0	±4	≥-3 dB Note 5	FDD_A, TDD_A	-121	-50
			FDD_B1, FDD_B2	-120.5	-50
			FDD_C, TDD_C	-120	-50
			FDD_D	-119.5	-50
			FDD_E, TDD_E	-119	-50
			FDD_F	-118.5	-50
			FDD_G	-118	-50
			FDD_H	-117.5	-50
			FDD_N	-114.5	-50
±3.5	±4	≥-6 dB	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: The condition level is increased by Δ>0, when applicable, as described in Sections B.4.2 and B.4.3 of TS 36.133 [23]. NOTE 4: E-UTRA operating band groups are as defined in Section 3.5 of TS 36.133 [23]. NOTE 5: The requirements apply for Ês/Iot ≤ 25 dB.					

The reporting range of RS-SINR measurement is defined from -23 dB to 40 dB with 0.5 dB resolution.

The mapping of the measured quantity is defined in table 6.7.7.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 6.7.7.0.1-2: RS-SINR measurement report mapping

Reported Value	Measured Quantity Value	Unit
RS-SINR_000	RS-SINR < -23	dB
RS-SINR_001	-23 ≤ RS-SINR < -22.5	dB
…	…	…
RS-SINR_126	39.5 ≤ RS-SINR < 40	dB
RS-SINR_127	40 ≤ RS-SINR	dB

6.7.7.1 NR SA FR1 – E-UTRAN RS-SINR absolute measurement accuracy

6.7.7.1.1 Test purpose

The purpose of this test is to verify that the inter-RAT E-UTRAN RS-SINR absolute measurement accuracy is within the specified limits for all bands, when the serving cell is NR FR1 and the target cell is E-UTRA.

6.7.7.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting E-UTRA and *rs-SINR-MeasEUTRA*.

6.7.7.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.7.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.7.1.

6.7.7.1.1.4 Test description

6.7.7.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.7.1.4.1-1.

Table 6.7.7.1.4.1-1: test configurations

Test Case ID	Description
6.7.7.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD, E-UTRAN: FDD
6.7.7.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD, E-UTRAN: FDD
6.7.7.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD, E-UTRAN: FDD
6.7.7.1-4	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD, E-UTRAN: TDD
6.7.7.1-5	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD, E-UTRAN: TDD

6.7.7.1-6	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD, E-UTRAN: TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.7.1.4.1-2.

Table 6.7.7.1.4.1-2: initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.7.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.7.3	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.7.1.4.3.

2. There are two carriers and two cells specified in the test, where NR Cell 1 is the NR PCell on the NR carrier and Cell 2 is the E-UTRA neighbour cell on the E-UTRA carrier and the target for the measurements.

6.7.7.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 6.7.7.1.5-1 and Table 6.7.7.1.5-2 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the RS-SINR reported values in the periodic MeasurementReport. The RS-SINR value of Cell 2 reported by the UE is compared to the expected RS-SINR. If the value is outside the limits in Table 6.7.7.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 6.7.7.1.5-2 as appropriate and repeat steps 5-7.

6.7.7.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.7.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-RAT and GAP NEEDED Table H.3.1-3 Table H.3.1-3a Table H.3.1-5 with Condition INTER-RAT Table H.3.1-7 with condition INTER-RAT Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.7.1.4.3-1A: MeasConfig (Test procedure step 3)

Derivation path: Table H.3.1-2 with condition INTER-RAT and GAP NEEDED			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	2 entries		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigInterRAT	ReportConfigE-UTRA-DEFAULT(Periodical)	Table 6.7.7.1.4.3-2	
}			
}			
ReportConfigToAddMod[2] SEQUENCE {		entry 2	
reportConfigId	2		
reportConfig CHOICE {			
reportConfigInterRAT	ReportConfigInterRAT-EVENT	Table 6.7.7.1.4.3-1B	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	2 entries		
MeasIdToAddMod[1] SEQUENCE {		entry 1	
measId	1		
measObjectId	2		
reportConfigId	1		
}			
MeasIdToAddMod[2] SEQUENCE {		entry 2	
measId	2		
measObjectId	2		
reportConfigId	2		
}			
}			
}			

Table 6.7.7.1.4.3-1B: ReportConfigInterRAT-EVENT (Table 6.7.7.1.4.3-1A)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-141 with condition EVENT_B1			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT ::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventB1 SEQUENCE {			
b1-ThresholdEUTRA CHOICE {			
sinr	127	Set threshold to 40dB to ensure measId 2 will never be triggered	
}			
}			
}			
}			
}			

}			

Table 6.7.7.1.4.3-2: ReportConfigE-UTRA-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-141 with Condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
reportQuantityCell SEQUENCE {			
rsrp	false		
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

6.7.7.1.5 Test requirement

Table 6.7.7.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Tables 6.7.7.1.5-1 and 6.7.7.1.5-2 shall meet the corresponding absolute accuracy requirements in Table 6.7.7.1.5-3.

Table 6.7.7.1.5-1: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RS-SINR test parameters

Parameter		**Unit**	**Cell 1**
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52 (FDD)
	Config 2, 5		10: $N_{RB,c}$ = 52 (TDD)
	Config 3, 6		40: $N_{RB,c}$ = 106 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			

EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc} Note2		dBm/15 kHz	-104
N_{oc} Note2	Config 1, 2, 4, 5	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$ Note3		dB	17
SS-RSRP Note3	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP Note3	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
Io Note3	Config 1, 2, 4, 5	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/38.16 MHz	-52.87
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 6.7.7.1.5-2: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RS-SINR test parameters

Parameter		Unit	Cell 2		
			Test 1	Test 2	Test 3
E-UTRA RF channel number			1		
Duplex mode	Config 1, 2, 3		FDD		
	Config 4, 5, 6		TDD		
TDD special subframe configuration Note1	Config 1, 2, 3		N/A		
	Config 4, 5, 6		6		
TDD uplink-downlink configuration Note1	Config 1, 2, 3		N/A		
	Config 4, 5, 6		1		
$BW_{channel}$		MHz	5 MHz: NRB,c = 25 10 MHz: NRB,c = 50 20 MHz: $N_{RB,c}$ = 100		
PDSCH parameters: DL Reference Measurement Channel Note2			-		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel Note2	Config 1, 2, 3		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
	Config 4, 5, 6		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns Note2	Config 1, 2, 3		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4, 5, 6		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		
PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					

PDSCH_RB OCNG_RA[Note3] OCNG_RB[Note3]					
N_{oc1}[Note4]	Depending on band group	dBm/15kHz	-88	-108.50	-119.5+ Δ_{BG_offset}
CRS $\hat{E}_s/N_{oc1}$		dB	-1.75	20.0	-3.2
CRS $\hat{E}_s/I_{ot}$[Note5]		dB	-1.75	20.0	-3.2
RSRP[Note5]	Depending on band group	dBm/15kHz	-89.75	-88.50	-122.7+ Δ_{BG_offset}
RS-SINR[Note5]		dB	-1.75	20	-3.2
Io[Note5]	Depending on band group	dBm/Ch BW	-58.00 + 10log($N_{RB,c}$ /50)	-60.68 + 10log($N_{RB,c}$ /50)	-90.02+ Δ_{BG_offset} + 10log($N_{RB,c}$ /50)
Propagation Condition			AWGN		
Antenna Configuration and Correlation Matrix			1x2		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over CRS subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc1} to be fulfilled.
Note 4a: Void
Note 5: CRS $\hat{E}_s/I_{ot}$, RSRP, RS-SINR and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [23].
Note 7: Void
Note 8: Void
Note 9: Void
Note 10: Void
Note 11: Δ_{BG_offset} for LTE band group is defined in TS 36.521-3 [26] clause 3.5.1, Table 3.5.1-1A.

Table 6.7.7.1.5-3: RS-SINR Intra frequency absolute accuracy requirements for the reported values

Normal Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest reported value (Cell 2)	35	79	32
Highest reported value (Cell 2)	51	94	49
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest reported value (Cell 2)	33	77	31
Highest reported value (Cell 2)	53	96	50

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.8 CLI Measurements

6.7.8.0 Minimum conformance requirements

6.7.8.0.1 Minimum conformance requirements for SRS-RSRP accuracy

Same as in clause 4.7.6.0.1.

6.7.8.0.2 Minimum conformance requirements for CLI-RSSI measurement accuracy with FR1 serving cell

Same as in clause 4.7.6.0.2

6.7.8.1 NR SA FR1 SRS-RSRP measurement accuracy

6.7.8.1.1 Test purpose

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits. This test will verify the SRS-RSRP measurement requirements in clause 6.7.8.0.

6.7.8.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR and CLI-based SRS-RSRP measurements.

6.7.8.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.8.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.8.1.

6.7.8.1.4 Test description

In this set of test cases there is one cell in the test, FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table 6.7.8.1.5-1 below. The test parameter for the (virtual) neighbour cell UE transmitting SRS are given in Table 6.7.8.1.5-2. The SRS resource configuration is given in Table 6.7.8.1.5-3.

6.7.8.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.8.1.4.1-1.

Table 6.7.8.1.4.1-1: Supported test configurations for NR SA FR1 SRS-RSRP measurement accuracy

Config	Description
6.7.8.1-1	15kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
6.7.8.1-2	30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 6.7.8.1.4.1-2.

Table 6.7.8.1.4.1-2: Initial conditions for NR SA FR1 SRS-RSRP measurement accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.8.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 6.7.8.1.4.3.

2. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Virtual UE 1 is the target for SRS-RSRP measurements.

3. The test parameters are given in Table 6.7.8.1.4.1-3

6.7.8.1.4.2 Test procedure

Before the test UE is configured to perform SRS-RSRP measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS resource configuration in Table 6.7.8.1.5-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR* SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to the corresponding Test in Table 6.7.8.1.5-1 as appropriate.

3. The SS shall transmit an *RRCReconfiguration* message configuring a CLI measurement object with periodic reporting, as specified in section 6.7.8.1.4.3.

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. The UE shall transmit periodically *MeasurementReport* messages.

6. After 10s wait from Step 5, the SS shall check the SRS-RSRP reported values in the periodic *MeasurementReport*. The reported SRS-RSRP value of the neighbour virtual UE is compared to the expected SRS-RSRP as specified in Table 6.7.8.1.5-4 and Table 6.7.8.1.5-5 for Test 1 and Test 2, correspondingly. If the reported value is outside the limits specified in such tables, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each Test in Table 6.7.8.1.5-1 as appropriate and repeat steps 2-7.

6.7.8.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 6.7.8.1.4.3-1: Common Exception messages for NR SA FR1 SRS-RSRP measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5

Table 6.7.8.1.4.3-2: *MeasObjectToAddModList* for NR SA FR1 SRS-RSRP measurement accuracy

Derivation Path: TS 38.508-1 [14], Table 4.6.3-77 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectToAddModList::= SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod {	1 entry		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectCLI-r16	MeasObjectCLI-r16		
}			
}			
}			

Table 6.7.8.1.4.3-3: *MeasObjectCLI-r16* for NR SA FR1 SRS-RSRP measurement accuracy

Derivation Path: TS 38.508-1 [14], Table 4.6.3-76 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectCLI-r16 ::= SEQUENCE {			
cli-ResourceConfig-r16 SEQUENCE {			
srs-ResourceConfig-r16 CHOICE {			
setup SEQUENCE {			
SRS-ResourceListConfigCLI-r16 SEQUENCE {	1 entry		
srs-Resource-r16	SRSConf.1	entry 1	Config 1
	SRSConf.2	entry 1	Config 2
srs-SCS-r16	kHz15		Config 1
	kHz30		Config 2
refServCellIndex-r16	0	PCell	
refBWP-r16	0	BWP-0	
}			
}			
}			
}			
}			

Table 6.7.8.1.4.3-4: *ReportConfigNR* for NR SA FR1 SRS-RSRP measurement accuracy

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
cli-Periodical-r16 SEQUENCE {			
reportInterval-r16	ms240		
reportAmount-r16	infinity		
reportQuantityCLI-r16	srs-rsrp		
maxReportCLI-r16	1		
}			
}			
}			

Table 6.7.8.1.4.3-5: *MeasResultCLI-r16* for NR SA FR1 SRS-RSRP measurement accuracy

Derivation Path: TS 38.508-1 [14], Table 4.6.3-79 and TS 38.331 [13], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultCLI-r16 ::= SEQUENCE {			
measResultsListSRS-r16 CHOICE {			
srs-ResourceId-r16	SRS-ResourceId		
srs-RSRP-Result-r16	SRS-RSRP-Range-r16	INTEGER (0..98)	
}			
}			

6.7.8.1.5 Test requirement

Table 6.7.8.1.5-1 and Table 6.7.8.1.5-2 define the primary level settings including test tolerances for NR SA FR1 SRS-RSRP measurement accuracy. Table 6.7.8.1.5-3 defines the SRS resource configurations. Table 6.7.8.1.5-4 and Table 6.7.8.1.5-5 define the absolute accuracy requirements for Tests 1, 2 and 3 for configurations 1 and 2, correspondingly.

Table 6.7.8.1.5-1: NR Cell specific test parameters for NR SA FR1 SRS-RSRP measurement accuracy

Parameter	Config	Unit	Test 1	Test 2	Test 3
SSB GSCN	1~2		freq1	freq1	freq1
Duplex mode	1~2		TDD	TDD	TDD
TDD configuration	1		TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
	2		TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106

PDSCH Reference measurement channel		1		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
		2		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel		1		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
		2		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel		1		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
		2		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration		1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
		2		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
OCNG Patterns		1~2		OP.1	OP.1	OP.1
TRS configuration		1		TRS.1.1 TDD	TRS.1.1 TDD	TRS.1.1 TDD
		2		TRS.1.2 TDD	TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~2		SMTC.1	SMTC.1	SMTC.1
Time offset between DL from serving cell and SRS from test system		1~2	μs	17.67	17.67	17.67
EPRE ratio of PSS to SSS		1~2	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2	NR_TDD_FR1_A NOTE 3	1	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2		Not applicable Note 4	-91	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
N_{oc} Note2	NR_TDD_FR1_A NOTE 3	1	dBm/SRS SCS	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 3	2		Not applicable Note 4	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 4:	Test 1 is not used when testing with 30kHz SSB SCS

Table 6.7.8.1.5-2: Neighbor UE specific test parameters for NR SA FR1 SRS-RSRP measurement accuracy

Parameter		Config	Unit	Test 1	Test 2	Test 3
N_{oc} Note2	NR_TDD_FR1_A NOTE 5	1	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2		Not applicable Note 6	-91	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
N_{oc} Note2	NR_TDD_FR1_A NOTE 5	1	dBm/SRS SCS	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2		Not applicable Note 6	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109
$\hat{E}_s / I_{ot}$ on SRS	NR_TDD_FR1_A NOTE 5	1	dB	1.5	1.5	1.75
	NR_TDD_FR1_C					1.5
	NR_TDD_FR1_D					1.5
	NR_TDD_FR1_E					1.5
	NR_TDD_FR1_A NOTE 5	2		Not applicable Note 6	1.5	2.25
	NR_TDD_FR1_C					1.5
	NR_TDD_FR1_D					1.5
	NR_TDD_FR1_E					1.5
SRS RSRP Note3	NR_TDD_FR1_A NOTE 5	1	dBm/SRS SCS	-104.5	-86.5	-112.25
	NR_TDD_FR1_C					-111.5
	NR_TDD_FR1_D					-111
	NR_TDD_FR1_E					-110.5
	NR_TDD_FR1_A NOTE 5	2		Not applicable Note 6	-86.49	-108.74
	NR_TDD_FR1_C					-108.49
	NR_TDD_FR1_D					-107.99
	NR_TDD_FR1_E					-107.49
Io Note3	NR_TDD_FR1_A NOTE 5	1	dBm/9.36 MHz	-74.42	-56.42	-82.28
	NR_TDD_FR1_C					-81.42
	NR_TDD_FR1_D					-80.92
	NR_TDD_FR1_E					-80.42
	NR_TDD_FR1_A NOTE 5	2	dBm/38.16 MHz	Not applicable Note 6	-54.80	-77.49
	NR_TDD_FR1_C					-76.80
	NR_TDD_FR1_D					-76.30
	NR_TDD_FR1_E					-75.80
$\hat{E}_s / N_{oc}$ on SRS	NR_TDD_FR1_A NOTE 5	1	dB	1.5	1.5	1.75
	NR_TDD_FR1_C					1.5
	NR_TDD_FR1_D					1.5
	NR_TDD_FR1_E					1.5

	NR_TDD_FR1_A NOTE 5	2		Not applicable Note 6	1.5	2.25
	NR_TDD_FR1_C					1.5
	NR_TDD_FR1_D					1.5
	NR_TDD_FR1_E					1.5
Propagation condition		1~2		AWGN	AWGN	AWGN
Antenna configuration		1~2		1x2	1x2	1x2
SRS configuration		1		SRSConf.1	SRSConf.1	SRSConf.1
		2		SRSConf.2	SRSConf.2	SRSConf.2

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of the test.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 6: Test 1 is not used when testing with 30kHz SSB SCS
Note 7: For Test 3, values are specified based on NR_TDD_FR1_X but they apply also to the FDD band group counterpart, NR_FDD_FR1_X. Informatively, test parameters are defined based on band group A and then add Δ_{BG_offset}, which is the band group dependent component defined in clause 3A.4, Table 3A.4.1-2.

Table 6.7.8.1.5-3: SRS configurations for NR SA FR1 SRS-RSRP measurement accuracy

	Field	SRSConf.1	SRSConf.2
SRS-ResourceSet	srs-ResourceSetId	0	0
	srs-ResourceIdList	0	0
	resourceType	Periodic	Periodic
	Usage	Codebook	Codebook
SRS-Resource	SRS-ResourceId	0	0
	nrofSRS-Ports	Port1	Port1
	transmissionComb	n2	n2
	combOffset-n2	0	0
	cyclicShift-n2	0	0
	resourceMapping startPosition	0	0
	resourceMapping nrofSymbols	n1	n1
	resourceMapping repetitionFactor	n1	n1
	freqDomainPosition	0	0
	freqDomainShift	0	0
	freqHopping c-SRS	12	12
	freqHopping b-SRS	0	0
	freqHopping b-hop	0	0
	groupOrSequenceHopping	Neither	Neither
	resourceType	Periodic	Periodic
	periodicityAndOffset-p	sl20, 9	sl40, 19
	sequenceId	0	0

Table 6.7.8.1.5-4: Absolute accuracy requirements for the reported values for test configuration 1 of NR SA FR1 SRS-RSRP measurement accuracy

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest SRS-RSRP reported value	30	45	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	23
			Bands NR_TDD_FR1_C	23

			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	24
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	24
Highest SRS-RSRP reported value	41	62	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	33
			Bands NR_TDD_FR1_C	34
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	34
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	35
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2				

Table 6.7.8.1.5-5: Absolute accuracy requirements for the reported values for test configuration 2 of NR SA FR1 SRS-RSRP measurement accuracy

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest SRS-RSRP reported value	N/A Note 2	44	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	26
			Bands NR_TDD_FR1_C	26
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	26
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	27
Highest SRS-RSRP reported value	N/A Note 2	63	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	37
			Bands NR_TDD_FR1_C	37
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	38
			Bands NR_FDD_FR1_E, NR_TDD_FR1_E	38
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2 Note 2: Test 1 is not used when testing with 30kHz SSB SCS				

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.9 L1-SINR measurement for beam reporting

6.7.9.0 Minimum conformance requirements

6.7.9.0.1 Minimum conformance requirements for CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off

The UE shall be capable of performing L1-SINR measurements with the CSI-RS configured as CMR and no dedicated resource configured as IMR for L1-SINR computation, and the UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ is defined in Table 6.7.9.0.1-1 for FR1 and in Table 6.7.9.0.1-2 for FR2, where

For the value of M,

- For periodic and semi-persistent CSI-RS resources as CMR, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise;

- For aperiodic CSI-RS resources as CMR, M=1.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with

- SSB for L1-RSRP or L1-SINR measurement, or
- another CSI-RS in resource set configured with repetition ON.

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 of TS 38.133 [6] if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured for all resources in the resource set.

For the value of P in FR1,

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For the value of P in FR2,

- P=1, when CSI-RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is not overlapped with SMTC occasion ($T_{CSI-RS} < MGRP$)
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).
- P=3, when CSI-RS is not overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).
- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
  - $T_{SMTCperiod} \neq MGRP$ or
  - $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} < 0.5*T_{SMTCperiod}$

- $P=\frac{3}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} = 0.5*T_{SMTCperiod}$

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{\min(T_{SMTCperiod},MGRP)}}$, when CSI-RS is partially overlapped with measurement gap ($T_{CSI-RS} < MGRP$) and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- $P=\frac{3}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)

Where:

$T_{SMTCperiod}$ = the configured SMTC1 period or SMTC2 period if configured.

T_{CSI-RS} = the periodicity of CSI-RS configured for L1-SINR measurement

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Note: The overlap between CSI-RS for L1-SINR measurement and SMTC means that CSI-RS for L1-SINR measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 6.7.9.0.1-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	

Table 6.7.9.0.1-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P*N)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	

The accuracy requirements in Table 6.7.9.0.1-3 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.

- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.

- The bandwidth of CSI-RS as CMR is 48 PRBs and the density is 3.

- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 6.7.9.0.1-3.

Table 6.7.9.0.1-3: L1-SINR absolute accuracy for CSI-RS based CMR only in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot	Io [Note 1] range					
			NR operating band groups [Note 2]	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/BW Channel	$dBm/BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±5.5	±6.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								

The normative reference for this requirement is TS 38.133 [6] clauses 9.8.4.1 and 10.1.27.1.

6.7.9.0.2 Minimum conformance requirements for SSB based CMR and dedicated IMR

The UE shall be capable of performing L1-SINR measurements with the SSB configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to SSB configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as SSB configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ is defined in Table 6.7.9.0.2-1 for FR1 and in Table 6.7.9.0.2-2 for FR2, where

For the value of M

- For periodic or semi-persistent NZP CSI-RS or CSI-IM resource as dedicated IMR, M=1 if the higher layer parameters *timeRestrictionForChannelMeasurements* and/or *timeRestrictionForInterferenceMeasurements* are configured, and M=3 otherwise;

For the value of N in FR2

- N = 8.

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- the value of P_{CMR} shall be derived in the same way as the value of P used for SSB based L1-RSRP measurement in clause 9.5.4.1 of TS 38.133 [6], in which the occasions and period of the SSB for CMR shall be used instead.

- the value of P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2 of TS 38.133 [6], in which the occasions and period of the NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with SSB as CMR and CSI-RS or CSI-IM as IMR, the requirement shall apply if the CSI-RS is configured as IMR with repetition field as "repetition = OFF" or CSI-IM is configured as IMR.

For L1-SINR measurement with SSB as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if SSB occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap

Table 6.7.9.0.2-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-SINR channel measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.	

Table 6.7.9.0.2-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(1.5*M*P*N)*T_{DRX}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.	

The accuracy requirements in Tables 6.7.9.0.2-3 and 6.7.9.0.2-4 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.
- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 6.7.9.0.2-3 and 6.7.9.0.2-4.

Table 6.7.9.0.2-3: L1-SINR absolute accuracy for SSB based CMR and NZP-IMR in FR1

Accuracy		**Conditions**						
Normal condition	**Extreme condition**	**SSB-CMR Ês/Iot**	**NZP-IMR Ês/Iot**	**Io [Note 1] range**				
				NR operating band groups [Note 2]	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
					SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
				NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50

±4.0	±5.0	≥0	≥0	NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
				NR_TDD_FR1_C	-120	-117	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								

Table 6.7.9.0.2-4: L1-SINR absolute accuracy for SSB based CMR and ZP-IMR in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB-CMR Ês/Iot**	**Io [Note 1] range**				
			NR operating band groups [Note 2]	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±4.5	±5.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							

The normative reference for this requirement is TS 38.133 [6] clauses 9.8.4.2 and 10.1.27.2.

6.7.9.0.3 Minimum conformance requirements for CSI-RS based CMR and dedicated IMR

The UE shall be capable of performing L1-SINR measurements with the CSI-RS resource configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to CSI-RS resource configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as CSI-RS resource configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ is defined in Table 6.7.9.0.3-1 for FR1 and in Table 6.7.9.0.3-2 for FR2, where

For the value of M,

- M=1 shall be applied if
  - aperiodic NZP-CSI-RS as CMR or dedicated IMR, or
  - aperiodic CSI-IMR as dedicated IMR, or

- periodic and semi-persistent NZP-CSI-RS as CMR or dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured, or

- periodic and semi-persistent CSI-IM as dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured;

- M=3 otherwise.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.

- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 of TS 38.133 [6] if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured for all resources in the resource set.

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- The value of P_{CMR} and P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2 of TS 38.133 [6], in which the occasions and period of the CSI-RS for CMR and NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead respectively.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS as IMR, the requirement shall apply only if CSI-RS resources as CMR and IMR are configured with the same repetition field and the number of CSI-RS resources in the resource sets for CMR and IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-IM as IMR, the requirement shall apply only if the number of CSI-RS resources in the resource set for CMR and the number of CSI-IM resources in the resource set for IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if CSI-RS occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap.

Table 6.7.9.0.3-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ for FR1

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3. Note 3: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to CSI-RS configured for channel measurement, with the same periodicity.	

Table 6.7.9.0.3-2: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P*N)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3. Note 3: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to CSI-RS configured for channel measurement, with the same periodicity.	

The accuracy requirements in Tables 6.7.9.0.3-3 and 6.7.9.0.3-4 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 6.7.9.0.3-3 and 6.7.9.0.3-4.

Table 6.7.9.0.3-3: L1-SINR absolute accuracy for CSI-RS based CMR and NZP-IMR in FR1

Accuracy		Conditions							
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot	NZP-IMR Ês/Iot	Io Note 1 range					
				NR operating band groups Note 2	Minimum Io				Maximum Io
dB	dB	dB	dB		dBm / $SCS_{CSI\text{-}RS}$			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
					$SCS_{CSI\text{-}RS}$ = 15 kHz	$SCS_{CSI\text{-}RS}$ = 30 kHz	$SCS_{CSI\text{-}RS}$ = 60 kHz		

±4.0	±5.0	≥0	≥0	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
				NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
				NR_TDD_FR1_C	-120	-117	-114	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	-112	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.									

Table 6.7.9.0.3-4: L1-SINR absolute accuracy for CSI-RS based CMR and ZP-IMR in FR1

Accuracy		**Conditions**						
Normal condition	**Extreme condition**	**CSI-RS CMR Ês/Iot**	**Io [Note 1] range**					
			NR operating band groups [Note 2]	**Minimum Io**				**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{CSI-RS}**			**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{CSI-RS} = 15 kHz	**SCS_{CSI-RS} = 30 kHz**	**SCS_{CSI-RS} = 60 kHz**		
±4.5	±5.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								

The normative reference for this requirement is TS 38.133 [6] clauses 9.8.4.3 and 10.1.27.3.

6.7.9.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement

6.7.9.1.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR absolute measurement accuracy

6.7.9.1.1.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

6.7.9.1.1.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards. Applicability requires support of L1-SINR measurements.

6.7.9.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.9.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.9.1.

6.7.9.1.1.4 Test description

6.7.9.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.9.1.1.4.1-1.

Table 6.7.9.1.1.4.1-1: Applicable NR configurations for FR1 L1-SINR test with CSI-RS based CMR and no dedicated IMR configured

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 6.7.9.1.1.4.1-2.

Table 6.7.9.1.1.4.1-2: Initial conditions for CSI-RS based L1-SINR absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.9.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.9.1.1.4.3.

2. Cell 1 is the NR FR1 cell. Cell 1 is the target for CSI-RS based L1-SINR measurements. The UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. The connection setup is done according to the settings in Annex C.1.1.

6.7.9.1.1.4.2 Test procedure

The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.7.9.1.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.7.9.1.1.4.1-2.

2. Set the parameters according to T1 in Table 6.7.9.1.1.5-1.

3. The UE shall start sending L1-SINR report including results of both CSI-RS#0 and CSI-RS#1 every 80 slots.

4. The SS shall check the L1-SINR reported values of CSI-RS#0 and CSI-RS#1 in the periodic L1-RSRP reports. If the value for both CSI-RSs is within the limits in Table 6.7.9.1.1.5-2 or Table 6.7.9.1.1.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 6.7.9.1.1.5-1 as appropriate and repeat steps 3-5.

6.7.9.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.9.1.1.4.3-1: Common Exception messages NR SA CSI-RS-based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and CSI-SINR Table H.3.6A-2 with conditions CSI-RS and PERIODIC Table H.3.6A-3 with condition PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.9.1.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSB.	
}			
}			

6.7.9.1.1.5 Test requirement

Table 6.7.9.1.1.5-1 defines the primary level settings excluding test tolerances for all tests.

Each L1-SINR measurement report for each of the tests in Table 6.7.9.1.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.9.1.1.5-2 for test configurations 1 and 2, and the corresponding absolute accuracy requirements in Table 6.7.9.1.1.5-3 for test configuration 3.

Table 6.7.9.1.1.5-1: FR1 CSI-RS based L1-SINR test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD

		3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel		1		CR.1.1 FDD	CR.1.1 FDD
		2		CR.1.1 TDD	CR.1.1 TDD
		3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel		1		CCR.1.1 FDD	CCR.1.1 FDD
		2		CCR.1.1 TDD	CCR.1.1 TDD
		3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration		1		SSB.1 FR1	SSB.1 FR1
		2		SSB.1 FR1	SSB.1 FR1
		3		SSB.2 FR1	SSB.2 FR1
OCNG Patterns		1~3		OP.1	OP.1
TRS configuration		1		TRS.1.1 FDD	TRS.1.1 FDD
		2		TRS.1.1 TDD	TRS.1.1 TDD
		3		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~3		SMTC.1	SMTC.1
CSI-RS		1		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
		2		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
		3		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType		1~3		periodic	periodic
reportQuantity-r16		1~3		cri-SINR-r16	cri-SINR-r16
nrofReportedRS		1~3		2	2
L1-SINR reporting period		1~3		slot80	slot80
EPRE ratio of PSS to SSS		1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	Depending on band group	1,2	dBm/15kHz	-94.65	-117+ Δ_{BG_offset}
		3		-96.00	-117+ Δ_{BG_offset}
N_{oc} Note2		1,2	dBm/SSB SCS	-94.65	-117+ Δ_{BG_offset}
		3		-93.00	-114+ Δ_{BG_offset}
$\hat{E}_s/I_{ot}$		1~3	dB	10	-2.2
SSB RSRP Note3	Depending on band group	1,2	dBm/SSB SCS	-84.65	-119.2 + Δ_{BG_offset}
		3		-83.00	-116.2 + Δ_{BG_offset}
Io Note3	Depending on band group	1,2	dBm/9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
		3	dBm/38.16 MHz	-51.53	-80.90 + Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		1~3	dB	10	-2.2
Propagation condition		1~3		AWGN	AWGN
Antenna configuration		1~3		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 6.7.9.1.1.5-2: Same as Table Table 4.7.7.1.1.5-2

Table 6.7.9.1.1.5-3: Same as Table Table 4.7.7.1.1.5-3

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.9.1.2 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR relative measurement accuracy

6.7.9.1.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR relative measurement accuracy is within the specified limits.

6.7.9.1.2.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards. Applicability requires support of L1-SINR measurements.

6.7.9.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.7.7.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.4.7.7.1.

6.7.9.1.2.4 Test description

6.7.9.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.9.1.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.7.9.1.2.4.1-2.

Table 6.7.9.1.2.4.1-1: Applicable NR configurations for FR1 L1-SINR test with CSI-RS based CMR and no dedicated IMR configured

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 6.7.9.1.2.4.1-2: Initial conditions for CSI-RS based L1-SINR absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.9.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	

	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.9.1.2.4.3.
2. Cell 1 is the NR FR1 cell. Cell 1 is the target for CSI-RS based L1-SINR measurements. The UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. The connection setup is done according to the settings in Annex C.1.1.

6.7.9.1.2.4.2 Test procedure

The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.7.9.1.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.7.9.1.2.4.1-2.
2. Set the parameters according to T1 in Table 6.7.9.1.1.5-1.
3. The UE shall start sending L1-SINR report including results of both CSI-RS#0 and CSI-RS #1 every 80 slots.
4. The SS shall check the L1-SINR reported values of CSI-RS #0 and CSI-RS #1 in the periodic L1-SINR reports. The L1-SINR value for CSI-RS #1 is compared to the L1-SINR value for CSI-RS #0. If the difference is within the limits in Table 6.7.9.1.2.5-2 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.
5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
6. Set the parameters according to each sub-test in Table 6.7.9.1.1.5-1 as appropriate and repeat steps 3-5.

6.7.9.1.2.4.3 Message contents

Same message contents as described in section 6.7.9.1.1.4.3

6.7.9.1.2.5 Test requirement

Table 6.7.9.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-SINR measurement report for each of the tests in Table 6.7.9.1.2.5-1 shall meet the corresponding relative accuracy requirements in Table 6.7.9.1.2.5-2.

Table 6.7.9.1.2.5-1: Same as Table 4.7.7.1.2.5-1

Table 6.7.9.1.2.5-2: Same as Table 4.7.7.1.2.5-2

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.9.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy

6.7.9.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

6.7.9.2.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards. Applicability requires support for L1-SINR measurements on the NR PSCell.

6.7.9.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.9.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.9.2.

6.7.9.2.4 Test description

6.7.9.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.9.2.4.1-1.

Table 6.7.9.2.4.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 6.7.9.2.4.1-2.

Table 6.7.9.2.4.1-2: Initial conditions for SSB based and CSI-RS based L1-SINR absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.9.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.9.2.4.3.

2. Cell 1 is the NR FR1 cell. Cell 1 is the target for SSB-based L1-RSRP measurements. The UE is configured one SSB resource set with two SSB resources and one CSI-RS resource set with two CSI-RS resource. UE is configured to perform RLM and BFD measurement based on the SSB resources 0 and 1. UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-RS resources as IMR. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.

6.7.9.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.7.9.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.7.9.2.4.1-2.

2. Set the parameters according to T1 in Table 6.7.9.2.5-1. SS transmits CSI-RS as IMR with a periodicity of 20 slots.

3. The UE shall start sending L1-SINR report including results of both SSB#0 and SSB#1 every 80 slots.

4. The SS shall check the L1-SINR reported values of SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 in the periodic L1-RSRP reports. If the value for both SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 is within the limits in Table 6.7.9.2.5-2 and Table 6.7.9.2.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 6.7.9.2.5-1 as appropriate and repeat steps 3-5.

6.7.9.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.4.1.1.4.3-1: Common Exception messages NR SA SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and SS-SINR and CSI-RS_IMR Table H.3.6A-2 with conditions SSB and PERIODIC Table H.3.6A-3 with condition PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.4.1.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

6.7.9.2.5 Test requirement

Table 6.7.9.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 6.7.9.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.9.2.5-2 for test configurations 1 and 2, and the corresponding absolute accuracy requirements in Table 6.7.9.2.5-3 for test configuration 3.

Table 6.7.9.2.5-1: FR1 SSB based L1-SINR test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1

Duplex mode		1		FDD	FDD
		2		TDD	TDD
		3		TDD	TDD
TDD Configuration		1		N/A	N/A
		2		TDDConf.1.1	TDDConf.1.1
		3		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$		1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
		2		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
		3		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel		1		SR.1.1 FDD	SR.1.1 FDD
		2		SR.1.1 TDD	SR.1.1 TDD
		3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel		1		CR.1.1 FDD	CR.1.1 FDD
		2		CR.1.1 TDD	CR.1.1 TDD
		3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel		1		CCR.1.1 FDD	CCR.1.1 FDD
		2		CCR.1.1 TDD	CCR.1.1 TDD
		3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration		1		SSB.3 FR1	SSB.3 FR1
		2		SSB.3 FR1	SSB.3 FR1
		3		SSB.4 FR1	SSB.4 FR1
CSI-RS configuration		1		CSI-RS 1.1A FDD	CSI-RS 1.1A FDD
		2		CSI-RS 1.1A TDD	CSI-RS 1.1A TDD
		3		CSI-RS 2.1A TDD	CSI-RS 2.1A TDD
OCNG Patterns		1~3		OP.1	OP.1
Initial BWP Configuration		1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
TRS configuration		1		TRS.1.1 FDD	TRS.1.1 FDD
		2		TRS.1.1 TDD	TRS.1.1 TDD
		3		TRS.1.2 TDD	TRS.1.2 TDD
Dedicated BWP configuration		1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~3		SMTC.1	SMTC.1
reportConfigType		1~3		periodic	periodic
reportQuantity-r16		1~3		ssb-Index-SINR-r16	ssb-Index-SINR-r16
Number of reported RS		1~3		2	2
L1-SINR reporting period		1~3		slot80	slot80
EPRE ratio of PSS to SSS		1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	Depending on band group	1,2	dBm/15kHz	-94.65	-117+ Δ_{BG_offset}
		3		-96.00	-117+ Δ_{BG_offset}
N_{oc} Note2		1,2	dBm/SSB SCS	-94.65	-117+ Δ_{BG_offset}
		3		-93.00	-114+ Δ_{BG_offset}
$\hat{E}_s/I_{ot}$		1~3	dB	10	-2.2
		1,2		-84.65	-119.2 + Δ_{BG_offset}

SSB RSRP Note3	Depending on band group	3	dBm/SSB SCS	-83.00	-116.2 + Δ_{BG_offset}
Io Note3	Depending on band group	1,2	dBm/9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
		3	dBm/38.16 MHz	-51.53	-80.90 + Δ_{BG_offset}
Propagation condition		1~3		AWGN	AWGN
Antenna configuration		1~3		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 6.7.9.2.5-2: Same as Table 4.7.7.2.5-2

Table 6.7.9.2.5-3: Same as Table 4.7.7.2.5-3

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.9.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy

6.7.9.3.1 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR absolute measurement accuracy

6.7.9.3.1.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

6.7.9.3.1.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards. Applicability requires support of L1-SINR measurements.

6.7.9.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.9.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.9.3.

6.7.9.3.1.4 Test description

6.7.9.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.9.3.1.4.1-1.

Table 6.7.9.3.1.4.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with CSI-RS based CMR and CSI-IM based IMR

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode

Note:	The UE is only required to be tested in one of the supported test configurations in each supported band

Configure the test equipment and the DUT according to the parameters in Table 6.7.9.3.1.4.1-2.

Table 6.7.9.3.1.4.1-2: Initial conditions for CSI-RS based CMR and CSI-IM based IMR absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.9.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.9.3.1.4.3.

2. Cell 1 is the NR FR1 cell. Cell 1 is the target for CSI-RS based CMR and CSI-IM based IMR measurements. The UE is configured one CSI-RS resource set with two CSI-RS resources and one CSI-IM resource set with two CSI-IM resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as CMR and CSI-IM as IMR. The connection setup is done according to the settings in Annex C.1.1.

6.7.9.3.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.7.9.3.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.7.9.3.1.4.1-2.

2. Set the parameters according to T1 in Table 6.7.9.3.1.5-1. SS transmits CSI-RS as IMR with a periodicity of 20 slots.

3. The UE shall start sending L1-SINR report including results of both SSB#0 and SSB#1 every 80 slots.

4. The SS shall check the L1-SINR reported values of CSI-RS#0+CSI-IM#0 and CSI-RS#1+CSI-IM#1 in the periodic L1-SINR reports. If the value for both CSI-RSs is within the limits in Table 6.7.9.3.1.5-2 and Table 6.7.9.3.1.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 6.7.9.3.1.5-1 as appropriate and repeat steps 3-5.

6.7.9.3.1.4.3 Message contents

Same message content as in subclause 6.7.9.1.4.3 with the following exception:

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.9.3.1.4.3-1: Common Exception messages NR SA CSI-RS based CMR and dedicated IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and CSI-SINR and CSI-IM_IMR Table H.3.6A-2 with conditions CSI-RS and PERIODIC Table H.3.6A-3 with condition PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.9.3.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

6.7.9.3.1.5 Test requirement

Table 6.7.9.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-SINR measurement report for each of the tests in Table 6.7.9.3.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.9.3.1.5-2 for test configurations 1 and 2, and the corresponding absolute accuracy requirements in Table 6.7.9.3.1.5-3 for test configuration 3.

Table 6.7.9.3.5-1: FR1 CSI-RS based L1-SINR test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	2		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
	3		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD
	3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.1 FR1	SSB.1 FR1
	2		SSB.1 FR1	SSB.1 FR1
	3		SSB.2 FR1	SSB.2 FR1

OCNG Patterns		1~3		OP.1	OP.1
TRS configuration		1		TRS.1.1 FDD	TRS.1.1 FDD
		2		TRS.1.1 TDD	TRS.1.1 TDD
		3		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~3		SMTC.1	SMTC.1
CSI-RS		1		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
		2		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
		3		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType		1~3		periodic	periodic
reportQuantity-r16		1~3		cri-SINR-r16	cri-SINR-r16
nrofReportedRS		1~3		2	2
L1-SINR reporting period		1~3		slot80	slot80
EPRE ratio of PSS to SSS		1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	Depending on band group	1,2	dBm/15kHz	-94.65	-117+ Δ_{BG_offset}
		3		-96.00	-117+ Δ_{BG_offset}
N_{oc} Note2		1,2	dBm/SSB SCS	-94.65	-117+ Δ_{BG_offset}
		3		-93.00	-114+ Δ_{BG_offset}
$\hat{E}_s/I_{ot}$		1~3	dB	10	-2.2
SSB RSRP Note3	Depending on band group	1,2	dBm/SSB SCS	-84.65	-119.2 + Δ_{BG_offset}
		3		-83.00	-116.2 + Δ_{BG_offset}
Io Note3	Depending on band group	1,2	dBm/9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
		3	dBm/38.16 MHz	-51.53	-80.90 + Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		1~3	dB	10	-2.2
Propagation condition		1~3		AWGN	AWGN
Antenna configuration		1~3		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 6.7.9.3.5-2: Same as Table 4.7.7.3.5-2

Table 6.7.9.3.5-3: Same as Table 4.7.7.3.5-3

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.9.3.2 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR relative measurement accuracy

6.7.9.3.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR relative measurement accuracy is within the specified limits.

6.7.9.3.2.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards. Applicability requires support of L1-SINR measurements.

6.7.9.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.7.9.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.9.3.

6.7.9.3.2.4 Test description

6.7.9.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.9.3.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 6.7.9.3.2.4.1-2.

Table 6.7.9.3.2.4.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with CSI-RS based CMR and CSI-IM based IMR

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 6.7.9.3.2.4.1-2.

Table 6.7.9.3.2.4.1-2: Initial conditions for CSI-RS based CMR and CSI-IM based IMR absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.9.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 6.7.9.3.2.4.3.

2. Cell 1 is the NR FR1 cell. Cell 1 is the target for CSI-RS based CMR and CSI-IM based IMR measurements. The UE is configured one CSI-RS resource set with two CSI-RS resources and one CSI-IM resource set with two CSI-IM resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as CMR and CSI-IM as IMR. The connection setup is done according to the settings in Annex C.1.1.

6.7.9.3.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 6.7.9.3.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.7.9.3.2.4.1-2.

2. Set the parameters according to T1 in Table 6.7.9.3.2.5-1.

3. The UE shall start sending L1-SINR report including results of both CSI-RS#0 and CSI-RS #1 every 80 slots.

4. The SS shall check the L1-SINR reported values of CSI-RS #0 and CSI-RS #1 in the periodic L1-SINR reports. The L1-SINR value for CSI-RS #1 is compared to the L1-SINR value for CSI-RS #0. If the difference is within the limits in Table 6.7.9.3.2.5-2 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 6.7.9.3.2.5-1 as appropriate and repeat steps 3-5.

6.7.9.3.2.4.3 Message contents

Same message contents as described in section 6.7.9.3.1.4.3

6.7.9.3.2.5 Test requirement

Table 6.7.9.3.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-SINR measurement report for each of the tests in Table 6.7.9.3.2.5-1 shall meet the corresponding relative accuracy requirements in Table 6.7.9.3.2.5-2.

Table 6.7.9.3.2.5-1: Same as Table 6.7.9.3.1.5-1

Table 6.7.9.3.2.5-2: Same as Table 4.7.7.3.2.5-2

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.10 CSI-RSRP

6.7.10.0 Minimum conformance requirements

Same as in clause 4.7.8.0.

6.7.10.1 Intra-frequency measurements

6.7.10.1.1 NR SA FR1 CSI-RSRP absolute measurement accuracy

Editor's Note: This test case is incomplete. The following still is missing:

- Message content is missing
- Test procedure is missing
- Cell mapping is missing
- Antenna connection diagram is missing
- Applicability is missing
- TT is missing

6.7.10.1.1.1 Test purpose

The purpose of this test is to verify that the CSI-RSRP absolute measurement accuracy is within the specified limits for all bands. This test will partly verify the requirements in clause 10.1.2.3.1 in TS 38.133 [6].

6.7.10.1.1.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting CSI-RS based RSRP and RSRQ measurement.

6.7.10.1.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.7.10.0

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.10.1.

6.7.10.1.1.1.4 Test description

6.7.10.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.10.1.1.4.1-1.

Table 6.7.10.1.1.4.1-1: NR SA FR1 CSI-RSRP absolute measurement accuracy supported test configurations

Configuration	Description
6.7.10.1.1-1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
6.7.10.1.1-2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6.7.10.1.1-3	NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.7.10.1.1.4.1-2.

Table 6.7.10.1.1.4-3: Test Environment parameters

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 6.7.10.1.1.4.3.

2. There are two cells on the same frequency. Cell 1 is the PCell, and Cell 2 is the target cell for CSI-RSRP measurements.

6.7.10.1.1.4.2 Test procedure

TBD

6.7.10.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.10.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	TBD

6.7.10.1.1.5 Test requirement

Table 6.7.10.1.1.5-1 defines the NR cell specific test parameters, not including test tolerances yet.

Table 6.7.10.1.1.5-1: Cell specific test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	

Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	4.7	-	4.7	-	4.7
	Config 2,3	µs	-	2.35	-	2.35	-	2.35
SMTC configuration	Config 1		SMTC.2					
	Config 2,3		SMTC.1					
OCNG Patterns			OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15KhZ	-106		-88		-114
		NR_FDD_FR1_B						-113.5
		NR_TDD_FR1_C						-113
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112
		NR_FDD_FR1_F						-111.5
		NR_FDD_FR1_G						-111
		NR_FDD_FR1_H						-110.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-94		-114
		NR_FDD_FR1_B						-113.5
		NR_TDD_FR1_C						-113
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112
		NR_FDD_FR1_F						-111.5
		NR_FDD_FR1_G						-111
		NR_FDD_FR1_H						-110.5
N_{oc} Note2	Config 1,2		dBm/SCS	-106		-88		Same as Noc/15kHz
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-91		-111
		NR_FDD_FR1_B						-110.5
		NR_TDD_FR1_C						-110
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109
		NR_FDD_FR1_F						-108.5
		NR_FDD_FR1_G						-108

		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
CSI-RSRP Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-111.00	-114.00
		NR_FDD_FR1_B						-110.50	-113.50
		NR_TDD_FR1_C						-110.00	-113.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.50	-112.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109.00	-112.00
		NR_FDD_FR1_F						-108.50	-111.50
		NR_FDD_FR1_G						-108.00	-111.00
		NR_FDD_FR1_H						-107.50	-110.50
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5	Not applicable Note 5	-85	-90	-108.00	-111.00
		NR_FDD_FR1_B						-107.50	-110.50
		NR_TDD_FR1_C						-107.00	-110.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-106.50	-109.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-106.00	-109.00
		NR_FDD_FR1_F						-105.50	-108.50
		NR_FDD_FR1_G						-105.00	-108.00
		NR_FDD_FR1_H						-104.50	-107.50
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09		-52.09		-80.03	
		NR_FDD_FR1_B						-79.53	
		NR_TDD_FR1_C						-79.03	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-78.53	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.03	
		NR_FDD_FR1_F						-77.53	
		NR_FDD_FR1_G						-77.03	
		NR_FDD_FR1_H						-76.53	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicable Note 5		-51.99		-73.94	
		NR_FDD_FR1_B						-73.44	
		NR_TDD_FR1_C						-72.94	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-72.44	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-71.94	
		NR_FDD_FR1_F						-71.44	
		NR_FDD_FR1_G						-70.94	
		NR_FDD_FR1_H						-70.44	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	CSI -RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	CSI -RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Subtest 1 is not used when testing with 30kHz SSB SCS.
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 6.7.10.1.1.5-2: CSI-RSRP Intra frequency absolute accuracy requirements for the reported values for test configurations 1 and 2

TBD

The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90% with the confidence level of 95%,

6.7.10.1.2 NR SA FR1 CSI-RSRP relative measurement accuracy

Editor's Note: This test case is incomplete. The following still is missing:

- Message content is missing
- Test procedure is missing
- Cell mapping is missing
- Antenna connection diagram is missing
- Applicability is missing
- TT is missing

6.7.10.1.2.1 Test purpose

The purpose of this test is to verify that the CSI-RSRP relative measurement accuracy is within the specified limits for all bands. This test will partly verify the requirements in clause 10.1.2.3.2 in TS 38.133 [6].

6.7.10.1.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting CSI-RS based RSRP and RSRQ measurement.

6.7.10.1.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.7.10.0

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.10.1.

6.7.10.1.2.1.4 Test description

6.7.10.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.10.1.2.4.1-1.

Table 6.7.10.1.2.4.1-1: NR SA FR1 CSI-RSRP absolute measurement accuracy supported test canfigurations

Configuration	Description
6.7.10.1.2-1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
6.7.10.1.2-2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6.7.10.1.2-3	NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.7.10.1.2.4.1-2.

Table 6.7.10.1.2.4-3: Test Environment parameters

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 6.7.10.1.2.4.3.
2. There are two cells on the same frequency. Cell 1 is the PCell, and Cell 2 is the target cell for CSI-RSRP measurements.

6.7.10.1.2.4.2 Test procedure

TBD

6.7.10.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.10.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	TBD

6.7.10.1.2.5 Test requirement

Table 6.7.10.1.2.5-1 defines the NR cell specific test parameters, not including test tolerances yet.

Table 6.7.10.1.2.5-1: Cell specific test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					

Downlink initial BWP configuration				DLBWP.0.1					
Downlink dedicated BWP configuration				DLBWP.1.1					
Uplink initial BWP configuration				ULBWP.0.1					
Uplink dedicated BWP configuration				ULBWP.1.1					
TRS configuration	Config 1			TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2			TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3			TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel	Config 1			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2			SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3			SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1			CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2			CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3			CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1			CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2			CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3			CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1			SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2			SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3			SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1		ms	-	4.7	-	4.7	-	4.7
	Config 2,3		µs	-	2.35	-	2.35	-	2.35
SMTC configuration	Config 1			SMTC.2					
	Config 2,3			SMTC.1					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	15 kHz					
	Config 3			30kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15KhZ	-106		-88		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-94		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} Note2	Config 1,2		dBm/SCS	-106		-88		Same as Noc/15kHz	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5		-91		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
CSI - RSRP Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-111.00	-114.00
		NR_FDD_FR1_B						-110.50	-113.50
		NR_TDD_FR1_C						-110.00	-113.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.50	-112.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109.00	-112.00
		NR_FDD_FR1_F						-108.50	-111.50
		NR_FDD_FR1_G						-108.00	-111.00
		NR_FDD_FR1_H						-107.50	-110.50
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5	Not applicable Note 5	-85	-90	-108.00	-111.00
		NR_FDD_FR1_B						-107.50	-110.50
		NR_TDD_FR1_C						-107.00	-110.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-106.50	-109.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-106.00	-109.00
		NR_FDD_FR1_F						-105.50	-108.50
		NR_FDD_FR1_G						-105.00	-108.00
		NR_FDD_FR1_H						-104.50	-107.50

Io[Note3]	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09	-52.09	-80.03
		NR_FDD_FR1_B				-79.53
		NR_TDD_FR1_C				-79.03
		NR_FDD_FR1_D, NR_TDD_FR1_D				-78.53
		NR_FDD_FR1_E, NR_TDD_FR1_E				-78.03
		NR_FDD_FR1_F				-77.53
		NR_FDD_FR1_G				-77.03
		NR_FDD_FR1_H				-76.53
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicable[Note 5]-	-51.99	-73.94
		NR_FDD_FR1_B				-73.44
		NR_TDD_FR1_C				-72.94
		NR_FDD_FR1_D, NR_TDD_FR1_D				-72.44
		NR_FDD_FR1_E, NR_TDD_FR1_E				-71.94
		NR_FDD_FR1_F				-71.44
		NR_FDD_FR1_G				-70.94
		NR_FDD_FR1_H				-70.44
Propagation condition			-	AWGN		
Antenna configuration				1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI -RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI -RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 6.7.10.1.2.5-2: SS-RSRP Intra frequency relative accuracy requirements for the reported values for test configurations 1 and 2

TBD

The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90% with the confidence level of 95%,

6.7.10.2 Inter-frequency measurements

6.7.10.2.1 NR SA FR1-FR1 CSI-RSRP absolute measurement accuracy

Editor's Note: This test case is incomplete. The following still is missing:

- Message content is missing

- Test procedure is missing

- Cell mapping is missing

- Antenna connection diagram is missing

- Applicability is missing

- TT is missing

6.7.10.2.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency CSI-RSRP absolute measurement accuracy is within the specified limits for all bands. This test will partly verify the requirements in clause 10.1.4.3.1 in TS 38.133 [6].

6.7.10.2.1.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting CSI-RS based RSRP and RSRQ measurement.

6.7.10.2.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.7.10.0

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.10.2.

6.7.10.2.1.1.4 Test description

6.7.10.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.10.2.1.4.1-1.

Table 6.7.10.2.1.4.1-1: NR SA FR1 CSI-RSRP absolute measurement accuracy supported test canfigurations

Configuration	Description
6.7.10.2.1-1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
6.7.10.2.1-2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6.7.10.2.1-3	NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.7.10.2.1.4.1-2.

Table 6.7.10.2.1.4-3: Test Environment parameters

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 6.7.10.2.1.4.3.
2. There are two cells on different frequencies. Cell 1 is the PCell, and Cell 2 is the target cell for CSI-RSRP measurements.

6.7.10.2.1.4.2 Test procedure

TBD

6.7.10.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.10.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	TBD

6.7.10.2.1.5 Test requirement

Table 6.7.10.2.1.5-1 defines the NR cell specific test parameters, not including test tolerances yet.

Table 6.7.10.2.1.5-1: Cell specific test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~3		freq1	freq2	freq1	freq2
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1,2	µs	-	4.7	-	4.7
	3	µs	-	2.35	-	2.35
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
CSI-RS configuration for RRM	1		CSI-RS.RRM.FR1.1 FDD		CSI-RS.RRM.FR1.1 FDD	
	2		CSI-RS.RRM.FR1.1 TDD		CSI-RS.RRM.FR1.1 TDD	

		3		CSI-RS.RRM.FR1.2 TDD		CSI-RS.RRM.FR1.2 TDD	
EPRE ratio of PSS to SSS		1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSSNote 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15 kHz	-94.65		(N_{oc} for Channel 2 +8dB)	-115
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2	dBm/SSB SCS	-94.65		(N_{oc} for Channel 2 +8dB)	-115
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3		-91.65		(N_{oc} for Channel 2 +8dB)	-112.00
	NR_FDD_FR1_B						-112.50
	NR_TDD_FR1_C						-112.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-111.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-111.00
	NR_FDD_FR1_F						-110.50
	NR_FDD_FR1_G						-110.00
	NR_FDD_FR1_H						-110.50
$\hat{E}_s/I_{ot}$		1~3	dB	10	10	13	-3

CSI-RSRP[Note3]	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2	dBm/SCS	-84.65	(RSRP for Cell 2 +25dB)	-118.00
	NR_FDD_FR1_B					-117.50
	NR_TDD_FR1_C					-117.00
	NR_FDD_FR1_D, NR_TDD_FR1_D					-116.50
	NR_FDD_FR1_E, NR_TDD_FR1_E					-116.00
	NR_FDD_FR1_F					-115.50
	NR_FDD_FR1_G					-115.00
	NR_FDD_FR1_H					-114.50
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3		-81.65	(RSRP for Cell 2 +25dB)	-115.00
	NR_FDD_FR1_B					-114.50
	NR_TDD_FR1_C					-114.00
	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.50
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113.00
	NR_FDD_FR1_F					-112.50
	NR_FDD_FR1_G					-112.00
	NR_FDD_FR1_H					-111.50
Io[Note3]	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2	dBm/ 9.36MHz	-56.28	Io for Channel 2 +19.75dB	-85.28
	NR_FDD_FR1_B					-84.78
	NR_TDD_FR1_C					-84.28
	NR_FDD_FR1_D, NR_TDD_FR1_D					-83.78
	NR_FDD_FR1_E, NR_TDD_FR1_E					-83.28
	NR_FDD_FR1_F					-82.78
	NR_FDD_FR1_G					-82.28
	NR_FDD_FR1_H					-81.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3	dBm/ 38.16MHz	-50.19	Io for Channel 2 +19.75dB	-79.19
	NR_FDD_FR1_B					-78.69
	NR_TDD_FR1_C					-78.19
	NR_FDD_FR1_D, NR_TDD_FR1_D					-77.69
	NR_FDD_FR1_E, NR_TDD_FR1_E					-77.19
	NR_FDD_FR1_F					-76.69
	NR_FDD_FR1_G					-76.19
	NR_FDD_FR1_H					-75.69
$\hat{E}_s / N_{oc}$		1~3	dB	10	10 / 13	-3
Propagation condition		1~3	-	AWGN		AWGN
Antenna configuration		1~3		1x2		1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 6.7.10.2.1.5-2: CSI-RSRP Inter frequency absolute accuracy requirements for the reported values for test configurations 1 and 2

TBD

The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90% with the confidence level of 95%,

6.7.10.2.2 NR SA FR1-FR1 CSI-RSRP relative measurement accuracy

Editor's Note: This test case is incomplete. The following still is missing:

- Message content is missing
- Test procedure is missing
- Cell mapping is missing
- Antenna connection diagram is missing
- Applicability is missing
- TT is missing

6.7.10.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency CSI-RSRP relative measurement accuracy is within the specified limits for all bands. This test will partly verify the requirements in clause 10.1.4.3.2 in TS 38.133 [6].

6.7.10.2.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting CSI-RS based RSRP and RSRQ measurement.

6.7.10.2.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 6.7.10.0

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.10.2.

6.7.10.2.2.1.4 Test description

6.7.10.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.10.2.2.4.1-1.

Table 6.7.10.2.2.4.1-1: NR SA FR1 CSI-RSRP relative measurement accuracy supported test canfigurations

Configuration	Description
6.7.10.2.2-1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
6.7.10.2.2-2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6.7.10.2.2-3	NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.7.10.2.2.4.1-2.

Table 6.7.10.2.2.4-3: Test Environment parameters

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 6.7.10.2.2.4.3.
2. There are two cells on different frequencies. Cell 1 is the PCell, and Cell 2 is the target cell for CSI-RSRP measurements.

6.7.10.2.2.4.2 Test procedure

TBD

6.7.10.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 6.7.10.2.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	TBD

6.7.10.2.2.5 Test requirement

Table 6.7.10.2.2.5-1 defines the NR cell specific test parameters, not including test tolerances yet.

Table 6.7.10.2.2.5-1: Cell specific test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~3		freq1	freq2	freq1	freq2
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	

		3		SR.2.1 FDD		SR.2.1 FDD		
RMSI CORESET Reference Channel		1		CR.1.1 FDD	-	CR.1.1 FDD	-	
		2		CR.1.1 TDD	-	CR.1.1 TDD	-	
		3		CR.2.1 FDD	-	CR.2.1 FDD	-	
Dedicated CORESET Reference Channel		1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	
		2		CCR.1.1 TDD	-	CCR.1.1 TDD	-	
		3		CCR.2.1 TDD	-	CCR.2.1 TDD	-	
SSB configuration		1		SSB.1 FR1		SSB.1 FR1		
		2		SSB.1 FR1		SSB.1 FR1		
		3		SSB.2 FR1		SSB.2 FR1		
OCNG Patterns		1~3		OP.1		OP.1		
TRS configuration		1		TRS.1.1 FDD	-	TRS.1.1 FDD		
		2		TRS.1.1 TDD		TRS.1.1 TDD		
		3		TRS.1.2 TDD		TRS.1.2 TDD		
Initial BWP Configuration		1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		
Dedicated BWP configuration		1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1		
Time offset with Cell 1		1,2	µs	-	4.7	-	4.7	
		3	µs	-	2.35	-	2.35	
SMTC configuration		1		SMTC.2		SMTC.2		
		2,3		SMTC.1		SMTC.1		
CSI-RS configuration for RRM		1		CSI-RS.RRM.FR1.1 FDD		CSI-RS.RRM.FR1.1 FDD		
		2		CSI-RS.RRM.FR1.1 TDD		CSI-RS.RRM.FR1.1 TDD		
		3		CSI-RS.RRM.FR1.2 TDD		CSI-RS.RRM.FR1.2 TDD		
EPRE ratio of PSS to SSS		1~3	dB	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH DMRS								
EPRE ratio of OCNG DMRS to SSSNote 1								
EPRE ratio of OCNG to OCNG DMRS Note 1								
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15 kHz	-94.65		(N_{oc} for Channel 2 +8dB)		-115
	NR_FDD_FR1_B							-114.5
	NR_TDD_FR1_C							-114
	NR_FDD_FR1_D, NR_TDD_FR1_D							-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E							-113

	NR_FDD_FR1_F					-112.5
	NR_FDD_FR1_G					-112
	NR_FDD_FR1_H					-111.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2	dBm/SSB SCS	-94.65	(N_{oc} for Channel 2 +8dB)	-115
	NR_FDD_FR1_B					-114.5
	NR_TDD_FR1_C					-114
	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113
	NR_FDD_FR1_F					-112.5
	NR_FDD_FR1_G					-112
	NR_FDD_FR1_H					-111.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3		-91.65	(N_{oc} for Channel 2 +8dB)	-112.00
	NR_FDD_FR1_B					-112.50
	NR_TDD_FR1_C					-112.00
	NR_FDD_FR1_D, NR_TDD_FR1_D					-111.50
	NR_FDD_FR1_E, NR_TDD_FR1_E					-111.00
	NR_FDD_FR1_F					-110.50
	NR_FDD_FR1_G					-110.00
	NR_FDD_FR1_H					-110.50
$\hat{E}_s/I_{ot}$		1~3	dB	10	10	13	-3
CSI-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	1,2	dBm/SCS	-84.65	(RSRP for Cell 2 +25dB)	-118.00
	NR_FDD_FR1_B					-117.50
	NR_TDD_FR1_C					-117.00
	NR_FDD_FR1_D, NR_TDD_FR1_D					-116.50
	NR_FDD_FR1_E, NR_TDD_FR1_E					-116.00
	NR_FDD_FR1_F					-115.50
	NR_FDD_FR1_G					-115.00
	NR_FDD_FR1_H					-114.50
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3		-81.65	(RSRP for Cell 2 +25dB)	-115.00
	NR_FDD_FR1_B					-114.50
	NR_TDD_FR1_C					-114.00
	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.50
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113.00
	NR_FDD_FR1_F					-112.50
	NR_FDD_FR1_G					-112.00
	NR_FDD_FR1_H					-111.50
Io Note3	NR_FDD_FR1_A,	1,2	dBm/	-56.28		-85.28

	NR_TDD_FR1_A NOTE 5,		9.36MHz				
	NR_FDD_FR1_B						-84.78
	NR_TDD_FR1_C						-84.28
	NR_FDD_FR1_D, NR_TDD_FR1_D					Io for Channel 2 +19.75dB	-83.78
	NR_FDD_FR1_E, NR_TDD_FR1_E						-83.28
	NR_FDD_FR1_F						-82.78
	NR_FDD_FR1_G						-82.28
	NR_FDD_FR1_H						-81.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5,	3	dBm/ 38.16MHz	-50.19		Io for Channel 2 +19.75dB	-79.19
	NR_FDD_FR1_B						-78.69
	NR_TDD_FR1_C						-78.19
	NR_FDD_FR1_D, NR_TDD_FR1_D						-77.69
	NR_FDD_FR1_E, NR_TDD_FR1_E						-77.19
	NR_FDD_FR1_F						-76.69
	NR_FDD_FR1_G						-76.19
	NR_FDD_FR1_H						-75.69
$\hat{E}_s / N_{oc}$		1~3	dB	10	10	13	-3
Propagation condition		1~3	-	AWGN		AWGN	
Antenna configuration		1~3		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 6.7.10.2.2.5-2: CSI-RSRP Inter frequency relative accuracy requirements for the reported values for test configurations 1 and 2

TBD

The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90% with the confidence level of 95%,

6.7.11 CSI-RSRQ

6.7.11.0 Minimum conformance requirements

6.7.11.0.1 Intra-frequency CSI-RSRQ accuracy requirements

[TS 38.133, Clause 10.1.7.2 and Clause 10.1.11]

6.7.11.0.1.1 Absolute CSI-RSRQ accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the intra-frequency measurement defined in Clause 9.10.2.1 in FR1 in TS 38.133 [6].

The accuracy requirements in Table 6.7.11.0.1.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 in TS 38.133 [6] for a corresponding Band for associated SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.12 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 6.7.11.0.1.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

Table 6.7.11.0.1.1-1: CSI-RSRQ Intra frequency absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 1 range					
			NR operating band groups Note 3	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
			NR_FDD_FR1_N	-114.5	-111.5	-108.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].

The reporting range of CSI-RSRQ measurement is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 6.7.11.0.1.1-2. The range in the signaling may be larger than the guaranteed accuracy range.

Table 6.7.11.0.1.1-2: CSI-RSRQ measurement report mapping

Reported value	Measured quantity value	Unit
CSI-RSRQ_0	CSI-RSRQ<-43	dB
CSI-RSRQ_1	-43≤ CSI-RSRQ<-42.5	dB
CSI-RSRQ_2	-42.5≤ CSI-RSRQ<-42	dB

CSI-RSRQ_3	-42≤ CSI-RSRQ<-41.5	dB
CSI-RSRQ_4	-41.5≤ CSI-RSRQ<-41	dB
..	..	…
CSI-RSRQ_122	17.5≤ CSI-RSRQ<18	dB
CSI-RSRQ_123	18≤ CSI-RSRQ<18.5	dB
CSI-RSRQ_124	18.5≤ CSI-RSRQ<19	dB
CSI-RSRQ_125	19≤ CSI-RSRQ<19.5	dB
CSI-RSRQ_126	19.5≤ CSI-RSRQ<20	dB
CSI-RSRQ_127	20 ≤ CSI-RSRQ	dB

6.7.11.0.2 Inter-frequency CSI-RSRQ accuracy requirements

[TS 38.133, Clause 10.1.9.2 and Clause 10.1.11]

6.7.11.0.2.1 Absolute CSI-RSRQ accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the inter-frequency measurement defined in Clause 9.10.3.1 in FR1 in TS 38.133 [6].

The accuracy requirements in Table 6.7.11.0.2.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 in TS 38.133 [6] for a corresponding Band for associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 6.7.11.0.2.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 6.7.11.0.2.1-1: CSI-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io [Note 1] range					
			NR operating band groups [Note 3]	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50

			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
			NR_FDD_FR1_N	-114.5	-111.5	-108.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].								

The reporting range of CSI-RSRQ measurement is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 6.7.11.0.2.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 6.7.11.0.2.1-2: CSI-RSRQ measurement report mapping

Reported value	Measured quantity value	Unit
CSI-RSRQ_0	CSI-RSRQ<-43	dB
CSI-RSRQ_1	-43≤ CSI-RSRQ<-42.5	dB
CSI-RSRQ_2	-42.5≤ CSI-RSRQ<-42	dB
CSI-RSRQ_3	-42≤ CSI-RSRQ<-41.5	dB
CSI-RSRQ_4	-41.5≤ CSI-RSRQ<-41	dB
..	..	…
CSI-RSRQ_122	17.5≤ CSI-RSRQ<18	dB
CSI-RSRQ_123	18≤ CSI-RSRQ<18.5	dB
CSI-RSRQ_124	18.5≤ CSI-RSRQ<19	dB
CSI-RSRQ_125	19≤ CSI-RSRQ<19.5	dB
CSI-RSRQ_126	19.5≤ CSI-RSRQ<20	dB
CSI-RSRQ_127	20 ≤ CSI-RSRQ	dB

6.7.11.0.2.2 Relative CSI-RSRQ accuracy

The relative accuracy of CSI-RSRQ is defined as the CSI-RSRQ measured from one cell compared to the CSI-RSRQ measured from another cell with the same center frequency, or between any two CSI-RSRQ levels measured on the same cell in FR1.

The accuracy requirements in Table 6.7.11.0.2.2-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 in TS 38.133 [6] for a corresponding Band for the associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 6.7.11.0.2.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 6.7.11.0.2.2-1: CSI-RSRQ Inter frequency relative accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot Note 2	Io Note 1 range					
			NR operating band groups Note 4	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
			NR_FDD_FR1_N	-114.5	-111.5	-108.5	N/A	-50
±4	±4	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].

6.7.11.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing

6.7.11.1.1 Test purpose

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.2 in TS 38.133 [6].

6.7.11.1.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR SA and CSI-RS based RSRP and RSRQ measurements.

6.7.11.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 6.7.11.0.1.

The normative reference for this requirement is in TS 38.133 [6] A.6.7.11.1.

6.7.11.1.4 Test description

6.7.11.1.4.1 Initial conditions

Supported test configuration are shown in Table 6.7.11.1.4.1-1.

Table 6.7.11.1.4.1-1: Intra frequency CSI-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode

2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.7.11.1.4.1-2.

Table 6.7.11.1.4.1-2: Initial conditions for CSI-RSRQ intra frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] Clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] Clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.11.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	Without the LTE link		

1. Message contents are defined in Clause 6.7.11.2.4.3.
2. In this test case all cells are on the same carrier frequency. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is an NR FR1 cell in the same frequency as Cell 1. Cell 2 is the target cell for CSI-RSRQ measurements. The connection setup is done according to the settings in Annex C.1.3.

6.7.11.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 6.7.11.1.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the CSI-RSRQ reported values in the periodic MeasurementReport. The CSI-RSRQ value of Cell 2 reported by the UE is compared to the expected CSI-RSRQ. If the value is outside the limits (determined by Table 6.7.11.0.1.1-1 and Table 6.7.11.0.1.1-2) or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 6.7.11.1.5-1 as appropriate and repeat steps 5-7.

6.7.11.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 6.7.11.1.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition CSI-RS MOBILITY and RSRQ

Table 6.7.11.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
maxReportCells	2		
}			
}			
}			

6.7.11.1.5 Test Requirements

The CSI-RSRQ measurement accuracy shall fulfil the requirements in Clause 6.7.11.0.1.

Table 6.7.11.1.5-1: CSI-RSRQ Intra frequency test parameters

Parameter		**Unit**	**Test 1**		**Test 2**		**Test 3**	
			Cell 1	**Cell 2**	**Cell 1**	**Cell 2**	**Cell 1**	**Cell 2**
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
Gap Pattern ID			0					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	

Control Channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-	
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD		
TRS Configuration	Config 1		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD		
OCNG Patterns			OP. 1						
Time offset with Cell 1	Config 1	µs	-	4.7	-	4.7	-	4.7	
	Config 2,3	µs	-	2.35	-	2.35	-	2.35	
CSI-RS configuration for RRM	Config 1		CSI-RS.RRM.FR1.1 FDD						
	Config 2		CSI-RS.RRM.FR1.1 TDD						
	Config 3		CSI-RS.RRM.FR1.2 TDD						
SMTC configuration	Config 1		SMTC.2						
	Config 2,3		SMTC.1						
SSB configuration	Config 1,2		SSB.1 FR1						
	Config 3		SSB.2 FR1						
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz						
	Config 3		30kHz						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
		NR_FDD_FR1_N						-107.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91		-		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	

		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
		NR_FDD_FR1_N						-107.5	
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ SCS	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
		NR_FDD_FR1_N						-107.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88		-		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
		NR_FDD_FR1_N						-104.5	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5..46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP/ CSI-RSRP Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ SCS	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5
		NR_TDD_FR1_C						-117	-117
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116
		NR_FDD_FR1_F						-115.5	-115.5
		NR_FDD_FR1_G						-115	-115
		NR_FDD_FR1_H						-114.5	-114.5
		NR_FDD_FR1_N						-111.5	-111.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-85	-	-	-115	-115
		NR_FDD_FR1_B						-114.5	-114.5
		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5
		NR_FDD_FR1_N						-108.5	-108.5
SS-RSRQ/CSI-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							

		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
		NR_FDD_FR1_N							
Io[Note3]	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50		-70		-83.5	
		NR_FDD_FR1_B						-83	
		NR_TDD_FR1_C						-82.5	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-82	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-81.5	
		NR_FDD_FR1_F						-81	
		NR_FDD_FR1_G						-80.5	
		NR_FDD_FR1_H						-80	
		NR_FDD_FR1_N						-77	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16 MHz	-50		-		-77.4	
		NR_FDD_FR1_B						-76.9	
		NR_TDD_FR1_C						-76.4	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-75.9	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-75.4	
		NR_FDD_FR1_F						-74.9	
		NR_FDD_FR1_G						-74.4	
		NR_FDD_FR1_H						-73.9	
		NR_FDD_FR1_N						-70.9	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6].
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.11.2 SA inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing

6.7.11.2.1 Test purpose

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.9.2.1 and 10.1.9.2.2 in TS 38.133 [6].

6.7.11.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR SA and CSI-RS based RSRP and RSRQ measurements.

6.7.11.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 6.7.11.0.2.

The normative reference for this requirement is in TS 38.133 [6] A.6.7.11.2.

6.7.11.2.4 Test description

6.7.11.2.4.1 Initial conditions

Supported test configurations are shown in Table 6.7.11.2.4.1-1.

Table 6.7.11.2.4.1-1: CSI-RSRQ Inter frequency CSI-RSRQ supported test configurations

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 6.7.11.2.4.1-2.

Table 6.7.11.2.4.1-2: Initial conditions for CSI-RSRQ inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] Clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] Clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.11.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

1. Message contents are defined in Clause 6.7.11.1.4.3.

2. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is an NR FR1 cell in the different frequency as Cell 1. Cell 2 is the target cell for CSI-RSRQ measurements. The connection setup is done according to the settings in Annex C.1.1.

6.7.11.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.

2. Set the parameters according to Table 6.7.11.2.5-1 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the CSI-RSRQ reported values in the periodic MeasurementReport. The CSI-RSRQ value of Cell 2 reported by the UE is compared to the CSI-RSRQ value of Cell 1 reported by the UE. If the difference between both values is outside the limits (determined by Table 6.7.11.0.2.1-1 and Table 6.7.11.0.2.1-2) or the UE fails to report the measurement value for Cell 2 or Cell 1, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 6.7.11.2.5-1 as appropriate and repeat steps 5-7.

6.7.11.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 6.7.11.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-6 with condition gapUE and Pattern #0 Table H.3.1-7 with condition INTER-FREQ, CSI-RS MOBILITY and RSRQ

Table 6.7.11.2.4.3-2: ReportConfigNR-DEFAULT (Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
maxReportCells	2		
}			
}			
}			

6.7.11.2.5 Test Requirements

The CSI-RSRQ measurement accuracy shall fulfil the requirements in Clause 6.7.11.0.2.

Table 6.7.11.2.5-1: CSI-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					

Gap pattern ID		Config 1,2,3		0					
BWP BW		Config 1		10: $N_{RB,c}$ = 52					
		Config 2		10: $N_{RB,c}$ = 52					
		Config 3		40: NRB,c = 106					
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
		Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
		Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
		Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
		Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
		Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
		Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
TRS Configuration		Config 1		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
		Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
		Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OCNG pattern 1					
Time offset with Cell 1		Config 1,2	µs	-	4.7	-	4.7	-	4.7
		Config 3	µs	-	2.35	-	2.35	-	2.35
CSI-RS configuration for RRM		Config 1		CSI-RS.RRM.FR1.1 FDD					
		Config 2		CSI-RS.RRM.FR1.1 TDD					
		Config 3		CSI-RS.RRM.FR1.2 TDD					
SSB configuration		Config 1,2		SSB.1 FR1					
		Config 3		SSB.2 FR1					
SMTC configuration		Config 1,2		SMTC.2					
		Config 3		SMTC.1					
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz					
		Config 3		30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18		-106		-116	

		NR_FDD_FR1_B				-115.5	
		NR_TDD_FR1_C				-115	
		NR_FDD_FR1_D NR_TDD_FR1_D				-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E				-114	
		NR_FDD_FR1_F				-113.5	
		NR_FDD_FR1_G				-113	
		NR_FDD_FR1_H				-112.5	
		NR_FDD_FR1_N				-109.5	
N_{oc} Note2	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-86.27	-113	-116	
		NR_FDD_FR1_B				-115.5	
		NR_TDD_FR1_C				-115	
		NR_FDD_FR1_D NR_TDD_FR1_D				-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E				-114	
		NR_FDD_FR1_F				-113.5	
		NR_FDD_FR1_G				-113	
		NR_FDD_FR1_H				-112.5	
		NR_FDD_FR1_N				-109.5	
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18	-106	-116	
		NR_FDD_FR1_B				-115.5	
		NR_TDD_FR1_C				-115	
		NR_FDD_FR1_D NR_TDD_FR1_D				-114.5	
		NR_FDD_FR1_E NR_TDD_FR1_E				-114	
		NR_FDD_FR1_F				-113.5	
		NR_FDD_FR1_G				-113	
		NR_FDD_FR1_H				-112.5	
		NR_FDD_FR1_N				-109.5	
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-83.27	-110	-113	
		NR_FDD_FR1_B				-112.5	
		NR_TDD_FR1_C				-112	
		NR_FDD_FR1_D NR_TDD_FR1_D				-111.5	
		NR_FDD_FR1_E NR_TDD_FR1_E				-111	
		NR_FDD_FR1_F				-110.5	
		NR_FDD_FR1_G				-110	
		NR_FDD_FR1_H				-109.5	
		NR_FDD_FR1_N				-106.5	
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	3	-1.75
SS-RSRP/CSI-RSRP Note3	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-81.93	-81.93	-107.75	-107.75	-113	-117.75
		NR_FDD_FR1_B						-112.5	-117.25
		NR_TDD_FR1_C						-112	-116.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-116.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-115.75

		NR_FDD_FR1_F						-110.5	-115.2
		NR_FDD_FR1_G						-110	-114.75
		NR_FDD_FR1_H						-109.5	-114.25
		NR_FDD_FR1_N						-106.5	-111.25
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85.02	-85.02	-111.75	-111.75	-110	-114.75
		NR_FDD_FR1_B						-109.5	-114.25
		NR_TDD_FR1_C						-109	-113.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-108.5	-113.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-108	-112.75
		NR_FDD_FR1_F						-107.5	-112.2
		NR_FDD_FR1_G						-107	-111.75
		NR_FDD_FR1_H						-106.5	-111.25
		NR_FDD_FR1_N						-103.5	-108.25
SS-RSRQ/CSI-RSRQ[Note3]		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-40.59	-40.59	12.56 T	14.76 T
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
		NR_FDD_FR1_N							
Io[Note3]	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-50		-75.83		-83.28	-85.83
		NR_FDD_FR1_B						-82.78	-85.33
		NR_TDD_FR1_C						-82.28	-84.83
		NR_FDD_FR1_D NR_TDD_FR1_D						-81.78	-84.33
		NR_FDD_FR1_E NR_TDD_FR1_E						-81.28	-83.83
		NR_FDD_FR1_F						-80.78	-83.33
		NR_FDD_FR1_G						-80.28	-82.83
		NR_FDD_FR1_H						-79.78	-82.33
		NR_FDD_FR1_N						-76.78	-79.33
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-50		-76.73		-77.19	-79.73
		NR_FDD_FR1_B						-76.69	-79.23
		NR_TDD_FR1_C						-76.19	-78.73

		NR_FDD_FR1_D NR_TDD_FR1_D					-75.69	-78.23
		NR_FDD_FR1_E NR_TDD_FR1_E					-75.19	-77.73
		NR_FDD_FR1_F					-74.69	-77.23
		NR_FDD_FR1_G					-74.19	-76.73
		NR_FDD_FR1_H					-73.69	-76.53
		NR_FDD_FR1_N					-70.69	-73.53
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6].
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.12 CSI-SINR

6.7.12.0 Minimum conformance requirements

6.7.12.0.1 Intra-frequency CSI-SINR accuracy requirements

[TS 38.133, Clause 10.1.12.2 and Clause 10.1.16]

6.7.12.0.1.1 Absolute CSI-SINR accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 6.7.12.0.1.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.12 in TS 38.133 [6] for a corresponding Band.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for intra-frequency measurement is serving cell timing.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 6.7.12.0.1.1-1.

Table 6.7.12.0.1.1-1: CSI-SINR Intra frequency absolute accuracy in FR1

Accuracy		Conditions				
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 1 range			
			NR operating band groups	Minimum Io		Maximum Io
dB	dB	dB		dBm / SCS SCS (kHz)	dBm/BW Channel	dBm/BW Channel

				15	30	60		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
			NR_FDD_FR1_N	-114.5	-111.5	-108.5	N/A	-70
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].
NOTE 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

The reporting range of CSI-SINR for reporting is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 6.7.12.0.1.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 6.7.12.0.1.1-2: CSI-SINR measurement report mapping

Reported value	Measured quantity value	Unit
CSI-SINR_0	CSI-SINR <-23	dB
CSI-SINR_1	-23≤ CSI-SINR <-22.5	dB
CSI-SINR_2	-22.5≤ CSI-SINR <-22	dB
CSI-SINR_3	-22≤ CSI-SINR <-21.5	dB
CSI-SINR_4	-21.5≤ CSI-SINR <-21	dB
..	..	…
CSI-SINR_123	38≤ CSI-SINR <38.5	dB
CSI-SINR_124	38.5≤ CSI-SINR <39	dB
CSI-SINR_125	39≤ CSI-SINR <39.5	dB
CSI-SINR_126	39.5≤ CSI-SINR <40	dB
CSI-SINR_127	40≤ CSI-SINR	dB

6.7.12.0.2 Inter-frequency CSI-SINR accuracy requirements

[TS 38.133, Clause 10.1.14.2 and Clause 10.1.16]

6.7.12.0.2.1 Absolute CSI-SINR accuracy

The requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 6.7.12.0.2.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band.

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 6.7.12.0.2.1-1.

Table 6.7.12.0.2.1-1: CSI-SINR Inter frequency absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io [Note 1] range					
			NR operating band groups	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS			dBm/BW Channel	dBm/BW Channel
				SCS (kHz)				
				15	30	60		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
			NR_FDD_FR1_N	-114.5	-111.5	-108.5	N/A	-70
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].
NOTE 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

The reporting range of CSI-SINR for reporting is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 6.7.12.0.2.1-2. The range in the signaling may be larger than the guaranteed accuracy range.

Table 6.7.12.0.2.1-2: CSI-SINR measurement report mapping

Reported value	Measured quantity value	Unit
CSI-SINR_0	CSI-SINR <-23	dB
CSI-SINR_1	-23≤ CSI-SINR <-22.5	dB
CSI-SINR_2	-22.5≤ CSI-SINR <-22	dB
CSI-SINR_3	-22≤ CSI-SINR <-21.5	dB
CSI-SINR_4	-21.5≤ CSI-SINR <-21	dB
..	..	…
CSI-SINR_123	38≤ CSI-SINR <38.5	dB
CSI-SINR_124	38.5≤ CSI-SINR <39	dB
CSI-SINR_125	39≤ CSI-SINR <39.5	dB
CSI-SINR_126	39.5≤ CSI-SINR <40	dB

CSI-SINR_127	40≤ CSI-SINR	dB

6.7.12.0.2.2 Relative CSI-SINR accuracy

The relative accuracy of CSI-SINR in inter frequency case is defined as the CSI-SINR measured from one cell on a frequency in FR1 compared to the CSI-SINR measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 6.7.12.0.2.2-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band.
- $|CSI_RP1_{dBm} - CSI_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 6.7.12.0.2.2-1.

Table 6.7.12.0.2.2-1: CSI-SINR Inter frequency relative accuracy in FR1

Accuracy		Conditions						
			Io Note 1 range					
Normal condition	Extreme condition	CSI-RS Ês/Iot Note 3	NR operating band groups	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS			dBm/BW Channel	dBm/BW Channel
				SCS (kHz)				
				15	30	60		
±3.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
			NR_FDD_FR1_N	-114.5	-111.5	-108.5	N/A	-70
±4	±4	≥-6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.
NOTE 4: NR operating band groups in FR1 are as defined in Clause 3.5.2 in TS 38.133 [6].
NOTE 5: The requirements apply for CSI-RS Ês/Iot ≤ XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

6.7.12.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing

6.7.12.1.1 Test purpose

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.12.2.1 in TS 38.133 [6].

6.7.12.1.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR SA, which supports CSI-RS based SINR measurements.

6.7.12.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 6.7.12.0.1.

The normative reference for this requirement is in TS 38.133 [6] A.6.7.12.1.

6.7.12.1.4 Test description

6.7.12.1.4.1 Initial conditions

Supported test configuration are shown in Table 6.7.12.1.4.1-1.

Table 6.7.12.1.4.1-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.7.12.1.4.1-2.

Table 6.7.12.1.4.1-2: Initial conditions for CSI-SINR intra frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] Clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] Clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.12.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

1. Message contents are defined in Clause 6.7.12.1.4.3.
2. In this test case all cells are on the same carrier frequency. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is an NR FR1 cell in the same frequency as

Cell 1. Cell 2 is the target cell for CSI-SINR measurements. The connection setup is done according to the settings in Annex C.1.3.

6.7.12.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 6.7.12.1.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the CSI-SINR reported values in the periodic MeasurementReport. The CSI-SINR value of Cell 2 reported by the UE is compared to the expected CSI-SINR. If the value is outside the limits (determined by Table 6.7.12.0.1.1-1 and Table 6.7.12.0.1.1-2) or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 6.7.12.1.5-1 as appropriate and repeat steps 5-7.

6.7.12.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 6.7.12.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition CSI-RS MOBILITY and SINR

Table 6.7.12.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

6.7.12.1.5 Test Requirements

The CSI-SINR measurement accuracy shall fulfil the requirements in Clause 6.7.12.0.1.1.

Table 6.7.12.1.5-1: CSI-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
CSI-RSSI-Measurement			Not Applicable			
Time offset with Cell 1	Config 1,2	µs	-	2.35	-	2.35
	Config 3	µs	-	1.17	-	1.17
SSB configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
SMTC configuration	Config 1		SMTC.2			
	Config 2,3		SMTC.1			
CSI-RS for mobility	Config 1		CSI-RS.RRM.FR1.1 FDD			
	Config 2		CSI-RS.RRM.FR1.1 TDD			
	Config 3		CSI-RS.RRM.FR1.2 TDD			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						

EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-93		-116	
		NR_FDD_FR1_B				-115.5	
		NR_TDD_FR1_C				-115	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-114	
		NR_FDD_FR1_F				-113.5	
		NR_FDD_FR1_G				-113	
		NR_FDD_FR1_H				-112.5	
		NR_FDD_FR1_N				-109.5	
N_{oc} Note2	Config 1,2		dBm/SCS	-93		Same as Noc for 15 kHz	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90		-113	
		NR_FDD_FR1_B				-112.5	
		NR_TDD_FR1_C				-112	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-111.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-111	
		NR_FDD_FR1_F				-110.5	
		NR_FDD_FR1_G				-110	
		NR_FDD_FR1_H				-109.5	
		NR_FDD_FR1_N				-106.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
CSI-RSRP Note 3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5
		NR_FDD_FR1_N				-113.5	-113.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117
		NR_FDD_FR1_B				-116.5	-116.5
		NR_TDD_FR1_C				-116	-116
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115
		NR_FDD_FR1_F				-114.5	-114.5
		NR_FDD_FR1_G				-114	-114
		NR_FDD_FR1_H				-113.5	-113.5
		NR_FDD_FR1_N				-113.5	-113.5
CSI-SINR Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					

		NR_FDD_FR1_D, NR_TDD_FR1_D					
		NR_FDD_FR1_E, NR_TDD_FR1_E					
		NR_FDD_FR1_F					
		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
		NR_FDD_FR1_N				-110.5	-110.5
Io[Note3]	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5		-85.51	
		NR_FDD_FR1_B				-85.01	
		NR_TDD_FR1_C				-84.51	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-84.01	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-83.51	
		NR_FDD_FR1_F				-83.01	
		NR_FDD_FR1_G				-82.51	
		NR_FDD_FR1_H				-82.01	
		NR_FDD_FR1_N				-79.01	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.41		-79.41	
		NR_FDD_FR1_B				-78.91	
		NR_TDD_FR1_C				-78.41	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-77.91	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-77.41	
		NR_FDD_FR1_F				-76.91	
		NR_FDD_FR1_G				-76.41	
		NR_FDD_FR1_H				-75.91	
		NR_FDD_FR1_N				-72.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6].
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.12.2 SA inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing

6.7.12.2.1 Test purpose

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.14.2.1 and 10.1.14.2.2 in TS 38.133 [6].

6.7.12.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR SA, which supports CSI-RS based SINR measurements.

6.7.12.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 6.7.12.0.2.

The normative reference for this requirement is in TS 38.133 [6] A.6.7.12.2.

6.7.12.2.4 Test description

6.7.12.2.4.1 Initial conditions

Supported test configurations are shown in Table 6.7.12.2.4.1-1.

Table 6.7.12.2.4.1-1: CSI-SINR Inter frequency CSI-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.7.12.2.4.1-2.

Table 6.7.12.2.4.1-2: Initial conditions for CSI-SINR inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] Clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] Clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.12.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

1. Message contents are defined in Clause 6.7.12.2.4.3.
2. In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Cell 1 is the NR serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6. Cell 2 is an NR FR1 cell in the different frequency as Cell 1. Cell 2 is the target cell for CSI-SINR measurements. The connection setup is done according to the settings in Annex C.1.1.

6.7.12.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 6.7.12.2.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the CSI-SINR reported values in the periodic MeasurementReport. The CSI-SINR value of Cell 2 reported by the UE is compared to the expected CSI-SINR. If the value is outside the limits (determined by Table 6.7.12.0.2.1-1 and Table 6.7.12.0.2.1-2) or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 6.7.12.2.5-1 as appropriate and repeat steps 5-7.

6.7.12.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 6.7.12.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-6 with condition gapUE and Pattern #0 Table H.3.1-7 with condition INTER-FREQ, CSI-RS MOBILITY and SINR

Table 6.7.12.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

6.7.12.2.5 Test Requirements

The CSI-SINR measurement accuracy shall fulfil the requirements in Clause 6.7.12.0.2.1 and 6.7.12.0.2.2

Table 6.7.12.2.5-1: CSI-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					

Uplink dedicated BWP configuration				ULBWP.1.1							
DRX Cycle configuration			ms	Not Applicable							
TRS configuration		Config 1		TRS.1.1 FDD							
		Config 2		TRS.1.1 TDD							
		Config 3		TRS.1.2 TDD							
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-		
		Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD			
		Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD			
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD			
		Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD			
		Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD			
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-		
		Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD			
		Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD			
OCNG Patterns				OP.1							
CSI-RSSI-Measurement				Not Applicable							
Time offset with Cell 1		Config 1,2	µs	-	2.35	-	2.35	-	2.35		
		Config 3	µs	-	1.17	-	1.17	-	1.17		
SMTC configuration		Config 1		SMTC.2							
		Config 2,3		SMTC.1							
SSB configuration		Config 1,2		SSB.1 FR1							
		Config 3		SSB.2 FR1							
CSI-RS for mobility		Config 1		CSI-RS.RRM.FR1.1 FDD							
		Config 2		CSI-RS.RRM.FR1.1 TDD							
		Config 3		CSI-RS.RRM.FR1.2 TDD							
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15							
		Config 3		30							
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0		
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS (Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-88		-108.5		-119.5			
		NR_FDD_FR1_B						-119			
		NR_TDD_FR1_C						-118.5			
		NR_FDD_FR1_D NR_TDD_FR1_D						-118			

		NR_FDD_FR1_E NR_TDD_FR1_E					-117.5
		NR_FDD_FR1_F					-117
		NR_FDD_FR1_G					-116.5
		NR_FDD_FR1_H					-116
		NR_FDD_FR1_N					-113
N_{oc} Note2	Config 1,2 N		dBm/15kHz	-88		-108.5	Same as Noc for 15kHz T
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85		-105.5	-116.5
		NR_FDD_FR1_B					-116
		NR_TDD_FR1_C					-115.5
		NR_FDD_FR1_D NR_TDD_FR1_D					-115
		NR_FDD_FR1_E NR_TDD_FR1_E					-114.5
		NR_FDD_FR1_F					-114
		NR_FDD_FR1_G					-114.5
		NR_FDD_FR1_H					-113
		NR_FDD_FR1_N					-110
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	15	15	-4.0	-4.0
$\hat{E}_s / N_{oc}$			dB	-1.75		15		-4.0	
CSI-RSRP Note3	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75		-93.5		-123.5	
		NR_FDD_FR1_B						-123	
		NR_TDD_FR1_C						-122.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-122	
		NR_FDD_FR1_E NR_TDD_FR1_E						-121.5	

		NR_FDD_FR1_F				-121
		NR_FDD_FR1_G				-120.5
		NR_FDD_FR1_H				-120
		NR_FDD_FR1_N				-117
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-86.75	-90.5	-120.5
		NR_FDD_FR1_B				-120
		NR_TDD_FR1_C				-119.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-119
		NR_FDD_FR1_E NR_TDD_FR1_E				-118.5
		NR_FDD_FR1_F				-118
		NR_FDD_FR1_G				-117.5
		NR_FDD_FR1_H				-117
		NR_FDD_FR1_N				-114
CSI-SINR Note3		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75	15	-4.0
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D NR_TDD_FR1_D				
		NR_FDD_FR1_E NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
		NR_FDD_FR1_N				
Io Note3	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.83	-65.4	-90.09
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D				-88.59

		NR_TDD_FR1_D				
		NR_FDD_FR1_E NR_TDD_FR1_E				-88.09
		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
		NR_FDD_FR1_N				-83.59
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 38.16 MHz	-51.73	-59.3	-84
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D NR_TDD_FR1_D				-82.5
		NR_FDD_FR1_E NR_TDD_FR1_E				-82
		NR_FDD_FR1_F				-81.5
		NR_FDD_FR1_G				-81
		NR_FDD_FR1_H				-80.5
		NR_FDD_FR1_N				-77.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6].
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.13 to 6.7.16

6.7.17 LTM L1-RSRP measurement

6.7.17.0 Minimum conformance requirements

6.7.17.0.1 SSB based absolute L1-RSRP measurement accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of candidate neighbour cell(s) on a frequency in FR1 that is on a different frequency than the serving cell.

The accuracy requirements in Table 6.7.17.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency L1-RSRP measurements are fulfilled according to TS 38.133 [6] Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 6.7.17.0.1-1: Inter-frequency L1-RSRP absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io[Note 1] range				
			NR operating band groups[Note 2]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±5.0	±9.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
			NR_FDD_FR1_N	-114.5	-111.5	N/A	-70
±8.5	±11.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H, NR_FDD_FR1_N	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in TS 38.133 [6] clause 3.5.2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.19E.1.1 and 10.1.6.

6.7.17.0.2 SSB based relative L1-RSRP measurement accuracy requirements

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB from one cell on a frequency in FR1 compared to the largest measured value of L1-RSRP among all SSBs measured from another cell on another frequency in FR1.

The accuracy requirements in Table 6.7.17.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to TS 38.133 [6] Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 6.7.17.0.2-1: Inter-frequency L1-RSRP relative accuracy in FR1

Accuracy	Conditions

Normal condition	Extreme condition	SSB Ês/Iot	Io[Note 1] range			
			NR operating band groups[Note 2]	Minimum Io		Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±5.0	±9.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
			NR_FDD_FR1_N	-114.5	-111.5	N/A	-70
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in TS 38.133 [6] clause 3.5.2.							

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.19E.1.2 and 10.1.6.

6.7.17.1 Inter-frequency L1-RSRP accuracy requirements for neighbour cell in FR1

6.7.17.1.1 NR SA FR1 Inter-frequency L1-RSRP absolute accuracy requirements for neighbour cell

Editor's Note: This test case is incomplete in following aspects:

6.7.17.1.1.1 Test purpose

To verify that the inter-frequency SSB based L1-RSRP absolute measurement accuracy on neighbour cell is within the limits for all bands specified in TS 38.133 [6] clause 10.1.19E.

6.7.17.1.1.2 Test applicability

This test applies to all types of NR UE supporting SSB based inter-frequency L1-RSRP measurements with measurement gaps and reports for LTM from release 18 and forward.

6.7.17.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.7.17.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.6.7.17.1.

6.7.17.1.1.4 Test description

6.7.17.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 6.7.17.1.1.4.1-1.

Table 6.7.17.1.1.4.1-1: Supported test configurations

Test Case ID	Description
6.7.17.1.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6.7.17.1.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6.7.17.1.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations in each supported band Note 2: Target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Test environment parameters are given in Table 6.7.17.1.1.4.1-2.

Table 6.7.17.1.1.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 6.7.17.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	-Without LTE link -For 4Rx capable UEs without any 2Rx RF bands use A.3.1.8.4 for TE part and A.3.2.5.2 for DUT part.		

1. The general test parameter settings are set up according to Table 6.7.17.1.1.4.1-3.
2. Message contents are defined in clause 6.7.17.1.1.4.3.
3. There are two NR carriers and one cell on each carrier in the test. Cell 1 (Pcell) is on NR RF channel 1, and is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test. Cell 2 (inter neighbour cell) is on NR RF channel 2.

Table 6.7.17.1.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Active cell			Cell 1	
Neighbouring cell			Cell 2	Cell 2 is the candidate cell
RF Channel Number			1: Cell 1 2: Cell 2	
Filter coefficient			0	L3 filtering is not used
reportQuantityRS-Indexes			rsrp	
maxNrofRS-IndexesToReport			1	
includeBeamMeasurements			True	
DRX			OFF	DRX is not used
Time offset between cells			3 μs	The timing of Cell 2 is later than the timing of Cell 1
Gap Pattern Id			0	
Measurement gap offset		ms	39	
LTM-CSI-ReportConfig	reportConfigType		periodic	Periodic L1-RSRP reporting configured
	L1-RSRP reporting period	slot	80	
	nrOfReportedCells		n1	Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1	
	spCellInclusion		N/A	
ltm-ConfigComplete			True	Candidate cell's configuration is complete configuration

6.7.17.1.1.4.2 Test procedure

In CSI measurement configuration, UE is indicated to perform inter-frequency L1-RSRP measurement on the SSBs and report periodically.

There are two tests in the test case, test 1 and test 2:

- In test 1, test at the highest power level below maximum Io.
- In test 2, test at the lowest power level above minimum SSB_RP.

Measurement gap pattern configuration defined in Table 6.7.17.1.1.4.1-3 is provided.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Test 1 in Table 6.7.17.1.1.5-1.
3. SS shall transmit an *RRCReconfiguration* message to configure periodical measurement report.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. The UE shall transmit a *MeasurementReport* message periodically including Cell 2 measurement report with SSB index.
6. SS shall transmit an *RRCReconfiguration* message to configure *LTM-Candidate-r18* for Cell 2. UE is configured with SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports for candidate Cell 2 in PUCCH format 2.
7. The UE shall transmit *RRCReconfigurationComplete* message.
8. The UE shall transmit L1-RSRP on PUCCH format 2 in Cell 1 with a periodicity of 80 slots.
9. After 10s wait from Step 6, the SS shall check the values in the periodic measurement report. The L1-RSRP value of Cell 2 reported by the UE is compared to the expected L1-RSRP value. If the value is outside the limits in Table 6.7.17.1.1.5-2 for test configurations 1, 2 and in Table 6.7.17.1.1.5-3 for test configuration 3, or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
10. The SS shall continue checking the L1-RSRP report transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
11. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
12. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
13. After the RRC connection release, the SS:

    - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),

    or:

    - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
14. Set the parameters according to each test in Table 6.7.17.1.1.5-1 as appropriate and repeat steps 3-13.

6.7.17.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 6.7.17.1.1.4.3-1: Common Exception messages (step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ and GAP NEEDED Table H.3.1-5 with condition SSB Index Table H.3.1-6 with conditions gapUE and Pattern #0 Table H.3.1-7 with conditions INTER-FREQ, SSB Index

Specific message contents exceptions for Cell 2	Table H.3.1-3 with condition INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 6.7.17.1.1.4.3-2: ReportConfigNR (periodical) (step3)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	ssb		
reportInterval	ms480		
reportAmount	infinity		
reportQuantityCell SEQUENCE {			
rsrp	true		
rsrq	false		
sinr	false		
}			
maxReportCells	1		
reportQuantityRS-Indexes SEQUENCE {			
rsrp	true		
rsrq	false		
sinr	false		
}			
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	true		
}			
}			
}			

Table 6.7.17.1.1.4.3-3: Common Exception messages (step 6)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.12-1 with condition L1-RSRP Table H.3.12-2 with condition L1-RSRP Table H.3.12-3 Table H.3.12-4 Table H.3.12-6 Table H.3.12-8
Specific message contents exceptiosn for Test Configuration 1	Table H.3.12-5 with condition SCS15 Table H.3.12-9 with conditions FR1, SSB#0, FDD
Specific message contents exceptiosn for Test Configuration 2	Table H.3.12-5 with condition SCS15 Table H.3.12-9 with conditions FR1, SSB#0, TDD, SCS15
Specific message contents exceptiosn for Test Configuration 3	Table H.3.12-5 with condition SCS30 Table H.3.12-9 with conditions FR1, SSB#0, TDD, SCS30

6.7.17.1.1.5 Test requirement

Table 6.7.17.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 6.7.17.1.1.5-1: Cell specific test parameters

Parameter	**Config**	**Unit**	**Test 1**		**Test 2**	
			Cell1	**Cell 2**	**Cell 1**	**Cell 2**
SSB GSCN	1~3		freq1	freq2	freq1	freq2
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD Configuration	1		N/A		N/A	

	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD	-	SR.1.1 TDD	-
	3		SR.2.1 TDD	-	SR.2.1 TDD	-
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 TDD	-	CR.2.1 TDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	-
	2		TRS.1.1 TDD	-	TRS.1.1 TDD	-
	3		TRS.1.2 TDD	-	TRS.1.2 TDD	-
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	1~3		SMTC.1		SMTC.1	
EPRE ratio of PSS to SSS	1~3	dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						

N_{oc} Note 2	NR_FDD_FR1_A, NR_TDD_FR1_A Note 5	1,2	dBm/15kHz	-94.65	-94.65	-109	-117
	NR_FDD_FR1_B					-108.5	-116.5
	NR_TDD_FR1_C					-108	-116
	NR_FDD_FR1_D, NR_TDD_FR1_D					-107.5	-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E					-107	-115
	NR_FDD_FR1_F					-106.5	-114.5
	NR_FDD_FR1_G					-106	-114
	NR_FDD_FR1_H					-105.5	-113.5
	NR_FDD_FR1_N					-102.5	-110.5
	NR_FDD_FR1_A, NR_TDD_FR1_A Note 5	3		-96	-96	-109	-117
	NR_FDD_FR1_B					-108.5	-116.5
	NR_TDD_FR1_C					-108	-116
	NR_FDD_FR1_D, NR_TDD_FR1_D					-107.5	-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E					-107	-115
	NR_FDD_FR1_F					-106.5	-114.5
	NR_FDD_FR1_G					-106	-114
	NR_FDD_FR1_H					-105.5	-113.5
	NR_FDD_FR1_N					-102.5	-110.5
N_{oc} Note 2	NR_FDD_FR1_A, NR_TDD_FR1_A Note 5	1,2	dBm/SSB SCS	-94.65	-94.65	-109	-117
	NR_FDD_FR1_B					-108.5	-116.5
	NR_TDD_FR1_C					-108	-116
	NR_FDD_FR1_D, NR_TDD_FR1_D					-107.5	-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E					-107	-115
	NR_FDD_FR1_F					-106.5	-114.5
	NR_FDD_FR1_G					-106	-114
	NR_FDD_FR1_H					-105.5	-113.5
	NR_FDD_FR1_N					-102.5	-110.5
	NR_FDD_FR1_A, NR_TDD_FR1_A Note 5	3		-93	-93	-106	-114
	NR_FDD_FR1_B					-105.5	-113.5
	NR_TDD_FR1_C					-105	-113
	NR_FDD_FR1_D, NR_TDD_FR1_D					-104.5	-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E					-104	-112
	NR_FDD_FR1_F					-103.5	-111.5
	NR_FDD_FR1_G					-103	-111
	NR_FDD_FR1_H					-102.5	-110.5
	NR_FDD_FR1_N					-99.5	-107.5
$\hat{E}_s/I_{ot}$		1~3	dB	10	10	13	-2.7
SSB RSRP Note 3	NR_FDD_FR1_A, NR_TDD_FR1_A Note 5	1,2	dBm/SSB SCS	-84.65	-84.65	-96	-119.7
	NR_FDD_FR1_B					-95.5	-119.2
	NR_TDD_FR1_C					-95	-118.7
	NR_FDD_FR1_D, NR_TDD_FR1_D					-94.5	-118.2
	NR_FDD_FR1_E, NR_TDD_FR1_E					-94	-117.7
	NR_FDD_FR1_F					-93.5	-117.1
	NR_FDD_FR1_G					-93	-116.7
	NR_FDD_FR1_H					-92.5	-116.1
	NR_FDD_FR1_N					-89.5	-113.2

	NR_FDD_FR1_A, NR_TDD_FR1_A Note 5	3		-82.99	-82.99	-92.99	-116.69
	NR_FDD_FR1_B					-92.49	-116.19
	NR_TDD_FR1_C					-91.99	-115.69
	NR_FDD_FR1_D, NR_TDD_FR1_D					-91.49	-115.19
	NR_FDD_FR1_E, NR_TDD_FR1_E					-90.99	-114.69
	NR_FDD_FR1_F					-90.49	-114.09
	NR_FDD_FR1_G					-89.99	-113.69
	NR_FDD_FR1_H					-89.49	-113.09
	NR_FDD_FR1_N					-86.49	-110.19
Io Note 3	NR_FDD_FR1_A, NR_TDD_FR1_A Note 5	1,2	dBm/9.36 MHz	-56.28	-56.28	-67.84	-87.18
	NR_FDD_FR1_B					-67.34	-86.68
	NR_TDD_FR1_C					-66.84	-86.18
	NR_FDD_FR1_D, NR_TDD_FR1_D					-66.34	-85.68
	NR_FDD_FR1_E, NR_TDD_FR1_E					-65.84	-85.18
	NR_FDD_FR1_F					-65.34	-84.65
	NR_FDD_FR1_G					-64.84	-84.18
	NR_FDD_FR1_H					-64.34	-83.65
	NR_FDD_FR1_N					-61.34	-80.68
	NR_FDD_FR1_A, NR_TDD_FR1_A Note 5	3	dBm/38.16 MHz	-51.53	-51.53	-61.73	-81.08
	NR_FDD_FR1_B					-61.23	-80.58
	NR_TDD_FR1_C					-60.73	-80.08
	NR_FDD_FR1_D, NR_TDD_FR1_D					-60.23	-79.58
	NR_FDD_FR1_E, NR_TDD_FR1_E					-59.73	-79.08
	NR_FDD_FR1_F					-59.23	-78.54
	NR_FDD_FR1_G					-58.73	-78.08
	NR_FDD_FR1_H					-58.23	-77.54
	NR_FDD_FR1_N					-55.23	-74.58
$\hat{E}_s/N_{oc}$		1~3	dB	10	10	13	-2.7
Propagation condition		1~3		AWGN		AWGN	
Antenna configuration		1~3		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51, and it is not required to run this test on band n51 in this release of the specification.

Each L1-RSRP measurement report of Cell 2 in each test in Table 6.7.17.1.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 6.7.17.1.1.5-2 for test configurations 1 and 2, and the corresponding absolute accuracy requirements in Table 6.7.17.1.1.5-3 for test configuration 3.

Table 6.7.17.1.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	62	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	30
		Bands NR_FDD_FR1_B	31
		Bands NR_TDD_FR1_C	31
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	32
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	32
		Bands NR_FDD_FR1_F	33
		Bands NR_FDD_FR1_G	33
		Bands NR_FDD_FR1_H	34
		Bands NR_FDD_FR1_N	37
Highest reported value (Cell 2)	82	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	43
		Bands NR_FDD_FR1_B	44
		Bands NR_TDD_FR1_C	44
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	45
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	45
		Bands NR_FDD_FR1_F	46
		Bands NR_FDD_FR1_G	46
		Bands NR_FDD_FR1_H	47
		Bands NR_FDD_FR1_N	50
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	59	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	26
		Bands NR_FDD_FR1_B	26
		Bands NR_TDD_FR1_C	27
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	27
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	28
		Bands NR_FDD_FR1_F	28
		Bands NR_FDD_FR1_G	29
		Bands NR_FDD_FR1_H	29
		Bands NR_FDD_FR1_N	32
Highest reported value (Cell 2)	85	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	48
		Bands NR_FDD_FR1_B	48
		Bands NR_TDD_FR1_C	49
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	49
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	50
		Bands NR_FDD_FR1_F	50
		Bands NR_FDD_FR1_G	51
		Bands NR_FDD_FR1_H	51
		Bands NR_FDD_FR1_N	54
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1.			

Table 6.7.17.1.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	63	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	33
		Bands NR_FDD_FR1_B	34

		Bands NR_TDD_FR1_C	34
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	35
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	35
		Bands NR_FDD_FR1_F	36
		Bands NR_FDD_FR1_G	36
		Bands NR_FDD_FR1_H	37
		Bands NR_FDD_FR1_N	40
Highest reported value (Cell 2)	84	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	46
		Bands NR_FDD_FR1_B	47
		Bands NR_TDD_FR1_C	47
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	48
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	48
		Bands NR_FDD_FR1_F	49
		Bands NR_FDD_FR1_G	49
		Bands NR_FDD_FR1_H	50
		Bands NR_FDD_FR1_N	53
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	60	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	29
		Bands NR_FDD_FR1_B	29
		Bands NR_TDD_FR1_C	30
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	30
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	31
		Bands NR_FDD_FR1_F	31
		Bands NR_FDD_FR1_G	32
		Bands NR_FDD_FR1_H	32
		Bands NR_FDD_FR1_N	35
Highest reported value (Cell 2)	87	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	51
		Bands NR_FDD_FR1_B	51
		Bands NR_TDD_FR1_C	52
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	52
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	53
		Bands NR_FDD_FR1_F	53
		Bands NR_FDD_FR1_G	54
		Bands NR_FDD_FR1_H	54
		Bands NR_FDD_FR1_N	57
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1.			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

6.7.17.1.2 Void

6.7.18 TDCP amplitude measurement accuracy

6.7.18.0 Minimum conformance requirements

6.7.18.0.1 TDCP amplitude measurement accuracy requirements in FR1

[38.133 clause 10.1.42]

The reporting range of TDCP amplitude is defined from 0 to 1. The reporting range of TDCP phase is 0 to 2π. The mapping of measured quantity is defined in Tables 6.7.18.0.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 6.7.18.0.1-1: TDCP phase measurement report mapping

Reported value	Measured quantity value
TDCP_PH_0	$0 \le TDCP_PH < \frac{2\pi}{16}$
TDCP_PH_1	$\frac{2\pi}{16} \le TDCP_PH < \frac{2\pi*2}{16}$
TDCP_PH_2	$\frac{2\pi*2}{16} \le TDCP_PH < \frac{2\pi*3}{16}$
TDCP_PH_3	$\frac{2\pi*3}{16} \le TDCP_PH < \frac{2\pi*4}{16}$
TDCP_PH_4	$\frac{2\pi*4}{16} \le TDCP_PH < \frac{2\pi*5}{16}$
TDCP_PH_5	$\frac{2\pi*5}{16} \le TDCP_PH < \frac{2\pi*6}{16}$
TDCP_PH_6	$\frac{2\pi*6}{16} \le TDCP_PH < \frac{2\pi*7}{16}$
TDCP_PH_7	$\frac{2\pi*7}{16} \le TDCP_PH < \frac{2\pi*8}{16}$
TDCP_PH_8	$\frac{2\pi*8}{16} \le TDCP_PH < \frac{2\pi*9}{16}$
TDCP_PH_9	$\frac{2\pi*9}{16} \le TDCP_PH < \frac{2\pi*10}{16}$
TDCP_PH_10	$\frac{2\pi*10}{16} \le TDCP_PH < \frac{2\pi*11}{16}$
TDCP_PH_11	$\frac{2\pi*11}{16} \le TDCP_PH < \frac{2\pi*12}{16}$
TDCP_PH_12	$\frac{2\pi*12}{16} \le TDCP_PH < \frac{2\pi*13}{16}$
TDCP_PH_13	$\frac{2\pi*13}{16} \le TDCP_PH < \frac{2\pi*14}{16}$
TDCP_PH_14	$\frac{2\pi*14}{16} \le TDCP_PH < \frac{2\pi*15}{16}$
TDCP_PH_15	$\frac{2\pi*15}{16} \le TDCP_PH \le 2\pi$

6.7.18.1 TDCP amplitude measurement accuracy in EN-DC

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing
- test case applicability is missing

6.7.18.1.1 Test purpose

The purpose of this test is to verify that the TRS based TDCP amplitude measurement accuracy is within the specified limits in the test requirements section Clause 10.1.42 of TS 38.133. The cofigurations for the test are specified in Table 6.7.18.1.1-1.

6.7.18.1.2 Test applicability

This test applies to all types of NR UE Rel-18 and forward supporting NR EN-DC, which supportsT based SINR measurements.

6.7.18.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 6.7.18.0.2.

The normative reference for this requirement is in TS 38.133 [6] A. 6.7.18.

6.7.18.1.4 Test description

6.7.18.1.4.1 Initial conditions

The test consists of two tests, Test 1 and Test 2. Each test further consists of two subtests Test 1A, 1B and Test 2A, 2B.

Test 1A: 10 Hz doppler + 15kHz SCS FDD + 20dB SNR

Test 1B: 10 Hz doppler + 30kHz SCS TDD + 20 dB SNR

Test 2A: 300 Hz doppler + 15kHz SCS FDD + 10 dB SNR

Test 2B: 300 Hz doppler + 30kHz SCS TDD + 10 dB SNR

Relevant parameters for each test are provided in the table 6.7.18.1.2-1. UE needs to pass Test 1A, 1B, 2A, 2B.

Table 6.7.18.1.4-1: Applicable NR configurations for FR1 TRS based TDCP test

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 6.7.18.1.4.1-2.

Table 6.7.18.1.4.1-2: Initial conditions for CSI-SINR inter frequency accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] Clause 4.1.
Test frequencies	As specified in Annex E, E.1.1, E.1.3.2, Table E.2-1 and TS 38.508-1 [14] Clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.7.10.2.4.1-1.		
Propagation conditions	AWGN		As specified in Clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

6.7.18.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 6.7.18.1.5-1 as appropriate.
3. The SS shall transmit an RRCConnectionReconfiguration message on Cell 1.
4. The UE shall transmit an RRCConnectionReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the TDCP reported index in the periodic MeasurementReport. The TDCP reported index of Cell 2 reported by the UE is compared to the expected TDCP reported index. If the value is outside the limits (determined by Table 6.7.18.0.2.1-1) or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 6.7.18.1.5-1 as appropriate and repeat steps 5-7.

6.7.18.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

6.7.18.1.5 Test Requirements

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in Clause A.3.7.2 of TS38.133. The test parameters for the Cell 2 are given in Table 6.7.18.1.5-1. Ampliutude of TDCP is tested by using the parameters in Table 6.7.18.1.5-1.

There is no measurement gap configured in the test. Before the test, UE is configured with 1 TRS set with the TRS resources in the set are configured in adjacent slot. UE is configured to perform L1-RSRP measurement based on the SSB resources 0 and 1.

Table 6.7.18.1.5-1: FR1 TRS based TDCP test parameters

Parameter	Config	Unit	Test 1 (FDD)		Test 2 (TDD)	
			1A	1B	2A	2B
SSB GSCN	1~4		freq1		freq1	
Duplex mode	1,3		FDD		N/A	
	2,4		N/A		TDD	
TDD Configuration	1,3		N/A		N/A	
	2,4		N/A		TDDConf.1.1	
$BW_{channel}$	1,3	MHz	10: $N_{RB,c}$ = 52		N/A	
	2,4		N/A		40: $N_{RB,c}$ = 106	
PDSCH Reference measurement channel	1,3		SR.1.1 FDD		N/A	
	2,4		N/A		SR.2.1 TDD	
RMSI CORESET Reference Channel	1,3		CR.1.1 FDD		N/A	
	2,4		N/A		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1,3		CCR.1.1 FDD		N/A	
	2,4		N/A		CCR.2.1 TDD	
SSB configuration	1,3		SSB.3 FR1		N/A	
	2,4		N/A		SSB.4 FR1	
OCNG Patterns	1~4		OP.1		OP.1	
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
TRS configuration	1,3		TRS.1.5 FDD		N/A	
	2,4		N/A		TRS.1.5 TDD	
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	1~4		SMTC.1		SMTC.1	
reportConfigType	1~4		periodic		periodic	
reportQuantity	1~4		ssb-Index-RSRP		ssb-Index-RSRP	
Number of reported RS	1~4		2		2	
L1-RSRP reporting period	1~4		slot80		slot80	
EPRE ratio of PSS to SSS	1~4	dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc}		1	-98		-98	

	dBm/15kHz	2				
N_{oc} Note 2	dBm/SCS	1	-98		-98	
		2	-95		-95	
$\hat{E}_s/I_{ot}$	1~4	dB	TBD		TBD	
$\hat{E}_s/N_{oc}$	1~4	dB	20	10	20	10
SSB_RP	1,4		-78	-88	-78	-88
Propagation condition	1~4		TDL-A 30ns 10 Hz	TDL-A 30ns 300 Hz	TDL-A 30ns 10Hz	TDL-A 30ns 300 Hz
Antenna configuration	1~4		1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						

For Test 1A, the reported TDCP index shall be smaller than or equal to 6 for the 80% of the times over repeated tests

For Test 1B: the reported TDCP index shall be smaller than or equal to 5 for the 80% of the times over repeated tests

For Test 2A: the reported TDCP index shall be larger than 8 for the 80% of the times over repeated tests

For Test 2B: the reported TDCP index shall be larger than 6 for the 80% of the times over repeated tests

7 NR standalone with at least one NR cell in FR2

7.0 General

This section contains test scenarios for NR standalone. This configuration is also known as NR/5GC. At least one NR cell is in Frequency Range 2.

For conformance testing involving FR2 test cases in this specification, the UE under test shall be pre-configured with UL Tx diversity schemes disabled to account for single polarization System Simulator (SS) in the test environment. The UE under test may transmit with dual polarization.

7.1 RRC_IDLE state mobility

7.1.1 NR cell re-selection

7.1.1.0 Minimum conformance requirements

7.1.1.0.1 Minimum conformance requirements for intra-frequency cell re-selection

The cell re-selection delay shall be less than $T_{evaluate\ NR_Intra} + T_{SI\text{-}NR}$ in RRC_IDLE state.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS38.304 [30] within T_{detect,NR_Intra} when that Treselection= 0. An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.2 of TS 38.133 [6] for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra}$ (see table 4.2.2.3-1, table 4.2.2.3-2, table 4.2.2.3-3, table 4.2.2.3-4 or table 4.2.2.3-5 of TS 38.133 [6]) for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS38.304 [1] within $T_{evaluate,NR_Intra}$ when $T_{reselection} = 0$ as specified in table 7.1.1.0.1-1, table 7.1.1.0.1-2, table 7.1.1.0.1-3, table 7.1.1.0.1-4 or table 7.1.1.0.1-5 provided that

when *rangeToBestCell* is not configured:

- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
    - if there are multiple such cells, the cell has the highest rank among them.
        - the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2 if the current serving cell is among them.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{reselection}$ timer has a non-zero value and non-zeroa-frequency cell is satisfied with the reselection criteria which are defined in TS38.304 [30], the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

For UE neither configured with *highSpeedMeasFlag-r16* nor *highSpeedMeasFlagFR2-r17*, T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,\ NR_intra}$ are specified in Table 7.1.1.0.1-1. For UE configured with *highSpeedMeasFlag-r16*, T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,\ NR_intra}$ are specified in Table 7.1.1.0.1-2. For FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*, T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,\ NR_intra}$ are specified in Table 7.1.1.0.1-3.

For UE not configured with eDRX_IDLE cycle, T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ are specified in Table 7.1.1.0.1-1, 7.1.1.0.1-2 and 7.1.1.0.1-3.

For UE configured with eDRX_IDLE cycle, T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ are specified in Table 7.1.1.0.1-4 and Table 7.1.1.0.1-5 for FR1 and FR2 respectively, where the requirements apply provided that the serving cell is configured with eDRX_IDLE and is the same in all PTWs during any of T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ when multiple PTWs are used.

The requirements in Table 7.1.1.0.1-2 apply only when the UE supports *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16*. For UE neither supporting either *measurementEnhancement-r16* nor *intraNR-MeasurementEnhancement-r16*, the UE is not required to meet the requirements specified in Table 7.1.1.0.1-2.

Table 7.1.1.0.1-1: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$

DRX cycle length [s]	Scaling Factor (N1)			T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
	FR1	FR2-1 Note1	FR2-2 Note2			
0.32	1	8	12	11.52 x N1 x M2 (36 x N1 x M2)	1.28 x N1 x M2 (4 x N1 x M2)	5.12 x N1 x M2 (16 x N1 x M2)
0.64		5	8	17.92 x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	6	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	5	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)

Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.

Note 2: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.

Note 3: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{detect,\ NR_intra}$ is expected.

Table 7.1.1.0.1-2: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ for UE configured with *highSpeedMeasFlag-r16* (Frequency range FR1)

DRX cycle length [s]	T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
0.32	2.56 x M2 (8 x M2)	0.32 x M3 (1 x M3)	0.96 x M4 (3 x M4)
0.64	5.12 (8)	0.64 (1)	1.92 (3)
1.28	8.96 (7)	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)

Note 1: when SMTC < = 40 ms, M2 = M3 = M4 = 1; and when SMTC > 40 ms, M2 = 1.5, M3 = M4 = 2

Note 2: When *highSpeedMeasFlag-r16* is configured, the requirements apply only to UE supporting either *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16.*

Table 7.1.1.0.1-3: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ for UE configured with *highSpeedMeasFlagFR2-r17* (Frequency range FR2)

DRX cycle length [s]	Scaling Factor (N1)	T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
0.32	$N2^{Note2}$	2.56 x N1 x M2 (8 x N1 x M2)	0.32 x N1 x M3 (1 x N1 x M3)	0.96 x N1 x M4 (3 x N1 x M4)
0.64	5	17.92 x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28	4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: When SMTC < = 40 ms, M2 = M3 = M4 = 1; and when SMTC > 40 ms, M2 = 1.5, M3 = M4 = 2 Note 2: N2 = 2 when [*highSpeedMeasFlagFR2-r17*] = [set1]; N2 = 6 when [*highSpeedMeasFlagFR2-r17*] = [set2].				

Table 7.1.1.0.1-4: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T_{detect,NR_Intra} [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles or eDRX cycles Note 3)
2.56	-	-	58.88 (23)	2.56 (1)	7.68 (3)
5.12	-	-	117.76 (23)	5.12 (1)	10.24 (2)
10.24	-	-	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥[1.28] ([1])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ (23)	0.32 x M2 (1 x M2)	0.64 x M2 (2 x M2)
	0.64	≥[1.28] ([1])		0.64 (1)	1.28 (2)
	1.28	≥[2.56] ([2])		1.28 (1)	2.56 (2)
	2.56	≥[5.12] ([4])		2.56 (1)	5.12 (2)
Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs. Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. Note 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles. Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{\text{Tevaluate,NR_Intra} * \text{DRX_cycle}}{1.28} \right\rceil * 1.28$. Note 5: M2 = 2 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.						

Table 7.1.1.0.1-5: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	T_{detect,NR_Intra} [s] (number of DRX cycles or eDRX cycles Note 4)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles or eDRX cycles Note 4)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles or eDRX cycles Note 4)
2.56	-	-	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
5.12	-	-	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	10.24 x N1 (2 x N1)

10.24	-	-	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	20.48 x N1 (2 x N1)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥5.12 (4)	8	$eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1)	0.32 x N1 (1 x N1)	0.64 x N1 (2 x N1)
	0.64	≥6.4 (5)	5		0.64 x N1 (1 x N1)	1.28 x N1 (2 x N1)
	1.28	≥10.24 (8)	4		1.28 x N1 (1 x N1)	2.56 x N1 (2 x N1)
	2.56	≥15.36 (12)	3		2.56 x N1 (1 x N1)	5.12 x N1 (2 x N1)
NOTE 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length. NOTE 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs. NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles. NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra*DRX_cycle}{1.28} \right\rceil * 1.28$. NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.						

The normative reference for this requirement is TS 38.133 [6] clause 4.2.2.2 and 4.2.2.3.

7.1.1.0.2 Minimum conformance requirements for inter-frequency cell re-selection

The cell re-selection delay shall be less than $T_{evaluate\ NR_Intra} + T_{SI\text{-}NR}$ in RRC_IDLE state.

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 of TS 38.133 [6].

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.For a UE configured with *highSpeedMeasInterFreq-r17*, and configured with relaxed measurement criterion (lowMobilityEvaluation or both *lowMobilityEvaluation* and *cellEdgeEvaluation*),

- if the relaxed measurement criteria in section 4.2.2.9.2 of TS 38.133 [6] are fulfilled, it is up to UE implementation whether to apply the relaxed measurements requirements specified in clause 4.2.2.10.2 of TS 38.133 [6] or high speed requirements specified in this clause

- otherwise, high speed requirements specified in this clause shall be applied

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS38.304 [30] within $K_{carrier} * T_{detect,NR_Inter} + K_{carrier_HST} * T_{detect,NR_Inter}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 5 dB in FR1 or 6.5dB in FR2 for reselections based on ranking or 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities or 4dB in FR1 and 4dB in FR2 for SS-RSRQ reselections based on absolute priorities. The parameter $K_{carrier}$ is the number of NR inter-frequency carriers indicated by the serving cell. An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.1.3 of TS 38.133 [6] for a corresponding Band.

The parameter $K_{carrier}$ is the number of NR inter-frequency carriers which are not configured with *highSpeedMeasInterFreq-r17* for FR1 or *highSpeedMeasFlagFR2-r17* for FR2 indicated by the serving cell. The parameter $K_{carrier_HST}$ is the number of NR inter-frequency carriers which are configured with *highSpeedMeasInterFreq-r17* for FR1 or*highSpeedMeasFlagFR2-r17* for FR2 indicated by the serving cell. The parameter $K_{carrier}$ for a UE configured with idle mode CA measurements (while T331 is running), is the combined number of NR inter-frequency carriers indicated by the serving cell and the number of NR inter-frequency carriers configured for idle mode CA measurements which are not configured with *highSpeedMeasInterFreq-r17* for FR1 or *highSpeedMeasFlagFR2-r17*for FR2. The parameter $K_{carrier_HST}$ for a UE configured with idle mode CA measurements (while T331 is running), is the

combined number of NR inter-frequency carriers indicated by the serving cell and the number of NR inter-frequency carriers configured for idle mode CA measurements which are configured with *highSpeedMeasInterFreq-r17* for FR1 or *highSpeedMeasFlagFR2-r17* for FR2.

Note: combined total number means that if a carrier is an inter-frequency carrier indicated by the serving cell for mobility and additionally a carrier configured for idle mode CA measurements, it only counts as one carrier.

An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.1.3 of TS 38.133[6] for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this section shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE not configured with eDRX_IDLE cycle shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier} * T_{measure,NR_Inter} + K_{carrier_HST} * T_{measure,NR_Inter_HST}$ (see table 4.2.2.4-1 and see table 4.2.2.4-2 of TS 38.133 [6]) if UE declares support of idle mode inter-frequency measurement enhancement when configured with *highSpeedMeasInterFreq-r17* in FR1; or table 4.2.2.4-2a of TS 38.133 [6] if UE declares support of idle mode inter-frequency measurement enhancement when configured with*highSpeedMeasFlagFR2-r17*in FR2;else see table 4.2.2.4-1 of TS 38.133 [6]) for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

A UE not configured with eDRX_IDLE cycle shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier} * T_{measure,NR_Inter} + K_{carrier_HST} * T_{measure,NR_Inter_HST}$ (see table 4.2.2.4-1, table 4.2.2.4-2 if UE declares support of idle mode inter-frequency measurement enhancement when configured with *highSpeedMeasInterFreq-r17* in FR1; or table 4.2.2.4-2a if UE declares support of idle mode inter-frequency measurement enhancement when configured with*highSpeedMeasFlagFR2-r17*in FR2;else see table 4.2.2.4-1) for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

A UE configured with eDRX_IDLE cycle shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier} * T_{measure,NR_Inter}$ (see table 4.2.2.4-3 and table 4.2.2.4d-4) for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE configured with eDRX_IDLE cycle shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE not configured with eDRX_IDLE cycle shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [30] within $K_{carrier} * T_{evaluate,NR_Inter} + K_{carrier_HST} * T_{evaluate,NR_Inter_HST}$ when $T_{reselection} = 0$ as specified in table 4.2.2.4-1, 4.2.2.4-2 of TS 38.133 [6] if UE declares support of idle mode inter-frequency measurement enhancement when configured with *highSpeedMeasInterFreq-r17*in FR1; or table 4.2.2.4-2a of TS 38.133 [6] if UEdeclares support of idle mode inter-frequency measurement enhancement when configured with*highSpeedMeasFlagFR2-r17*in FR2;else in table 4.2.2.4-1 of TS 38.133 [6]), provided that the reselection criteria is met by

- the condition when performing equal priority reselection and

  when *rangeToBestCell* is not configured:

- the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 or.

- when *rangeToBestCell* is configured:

  - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.

    - if there are multiple such cells, the cell has the highest rank among them

    - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 if the current serving cell is among them. or

- 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities or

- 4dB in FR1 or 4dB in FR2 for SS-RSRQ reselections based on absolute priorities.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE configured with eDRX_IDLE cycle shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [1] within $K_{carrier} * T_{evaluate,NR_Inter}$ when $T_{reselection} = 0$ as specified in table 4.2.2.4-3 and table 4.2.2.4-4 of TS 38.133 [6], provided that the reselection criteria is met by

- the condition when performing equal priority reselection and

  - when *rangeToBestCell* is not configured:

    - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 or.

  - when *rangeToBestCell* is configured:

    - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.

      - if there are multiple such cells, the cell has the highest rank among them

      - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 if the current serving cell is among them. or

- 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities or

- 4dB in FR1 or 4dB in FR2 for SS-RSRQ reselections based on absolute priorities.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 4.2.2.4-1 and Table 4.2.2.4-2 of TS 38.133 [6] under the following conditions:

- $T_{SMTC_intra} = T_{SMTC_inter} = 160$ ms; where

  T_{SMTC_intra} is the periodicity of the SMTC configured for the intra-frequency carrier if no identified intra-frequency cell is in the PCI list of *smtc2-LP* on this intra-frequency carrier; T_{SMTC_intra} is the periodicity of the *smtc2-LP* configured for the intra-frequency carrier if at least one identified intra-frequency cell is in the PCI list of *smtc2-LP* on this intra-frequency carrier. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed for T_{SMTC_intra}. If the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T_{detect, NR_intra} is expected.

  - T_{SMTC_inter} is the actual SMTC periodicity used by the inter-frequency cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the inter-frequency carrier is assumed for T_{SMTC_inter}. If the actual SSB transmission periodicity is greater than the SMTC configured for the inter-frequency carrier, longer T_{detect, NR_inter} is expected.

- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier and

- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion [1].

The normative reference for this requirement is TS 38.133 [6] clause 4.2.2.4.

7.1.1.0.3 Minimum conformance requirements for intra-frequency cell re-selection for UE configured with relaxed measurement criterion

The cell re-selection delay shall be less than $T_{evaluate\ NR_Intra} + T_{SI\text{-}NR}$ in RRC_IDLE state.

7.1.1.0.3.1 Introduction

This clause contains the requirements for measurements on intra-frequency NR cells when Srxlev $\leq S_{IntraSearchP}$ or Squal $\leq S_{IntraSearchQ}$ and when the UE is configured any of the following relaxed measurement criteria:

- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in TS 38.304 [30],

- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4.9.2 in TS 38.304 [30],

- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4.9.1 and 5.2.4.9.2 in TS 38.304 [30] respectively.

7.1.1.0.3.2 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [13] criterion and UE has fulfilled, or

- UE is configured with both *lowMobilityEvaluation* [13] criterion and *cellEdgeEvaluation* [13] criterion and *combineRelaxedMeasCondition* [13] not configured, and UE has fulfilled only the *lowMobilityEvaluation* [13] criterion.

The requirements defined in clause 7.1.1.0.1 apply for this clause except that:

- T_{detect,NR_Intra} as specified in Table 4.2.2.9.2-1 in TS 38.133 [6].

- $T_{measure,NR_Intra}$ as specified in Table 4.2.2.9.2-1 in TS 38.133 [6].

- $T_{evaluate,NR_Intra}$ as specified in Table 4.2.2.9.2-1 in TS 38.133 [6].

7.1.1.0.3.3 Measurements for UE fulfilling not-at-cell edge criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *cellEdgeEvaluation* [13] criterion and UE has fulfilled, or

- UE is configured with both *lowMobilityEvaluation* [13] criterion and *cellEdgeEvaluation* [13] criteria and *combineRelaxedMeasCondition* [13] not configured, and UE has fulfilled only the *cellEdgeEvaluation* [13] criterion.

The requirements defined in clause 7.1.1.0.1 apply for this clause except that:

- T_{detect,NR_Intra} as specified in Table 4.2.2.9.3-1 in TS 38.133 [6].

- $T_{measure,NR_Intra}$ as specified in Table 4.2.2.9.3-1 in TS 38.133 [6].

- $T_{evaluate,NR_Intra}$ as specified in Table 4.2.2.9.3-1 in TS 38.133 [6].

7.1.1.0.3.4 Measurements for UE fulfilling low mobility and not-at-cell edge criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [13] criterion and *cellEdgeEvaluation* [13] criterion, and

- has also fulfilled both criteria, and

- less than 1 hour have passed since measurements for cell reselection were last performed

In this case the UE is not required to meet $T_{detect,NR_Intra,}$ $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ as defined in Table 4.2.2.3-1 of TS 38.133[6].

The normative reference for this requirement is TS 38.133 [6] clause 4.2.2.9.

7.1.1.0.4 Minimum conformance requirements for inter-frequency cell re-selection for UE configured with relaxed measurement criterion

The cell re-selection delay shall be less than $T_{evaluate\ NR_Inter} + T_{SI-NR}$ in RRC_IDLE state.

7.1.1.0.4.1 Introduction

This clause contains the requirements for measurements on inter-frequency NR cells when the UE is configured with any of following relaxed measurement criteria:

- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in TS 38.304 [30],
- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4. 9.2 in TS 38.304 [30],
- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4. 9.1 and 5.2.4.9.2 in TS 38.304 [30] respectively.

7.1.1.0.4.2 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- T331 timer is not running for EMR measurements on inter-frequency NR carrier, and
- UE is configured with *lowMobilityEvaluation* [13] criterion and UE has fulfilled, or
- UE is configured with both *lowMobilityEvaluation* [13] and *cellEdgeEvaluation* [13] criterion and *combineRelaxedMeasCondition* [13] not configured, and UE has fulfilled only the *lowMobilityEvaluation* [13] criterion.

When $Srxlev \leq S_{nonIntraSearchP}$ or $Squal \leq S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2.2.4 apply for this clause except that:

- T_{detect,NR_Inter} as specified in Table 4.2.2.10.2-1 in TS 38.133 [6].
- $T_{measure,NR_Inter}$ as specified in Table 4.2.2.10.2-1 in TS 38.133 [6].
- $T_{evaluate,NR_Inter}$ as specified in Table 4.2.2.10.2-1 in TS 38.133 [6].

When $Srxlev > S_{nonIntraSearchP}$ and $Squal > S_{nonIntraSearchQ}$ and the UE is configured with *highPriorityMeasRelax* [13] then the UE shall search for inter-frequency layers of higher priority at least every $K2*T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and, K2 = 60. Otherwise if the UE is not configured with *highPriorityMeasRelax* [13] then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 of TS 38.133[6].

7.1.1.0.4.3 Measurements for UE fulfilling not-at-cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- T331 timer is not running for EMR measurements on inter-frequency NR carrier, and
- UE is configured with *cellEdgeEvaluation* [13] criterion, and UE has fulfilled or
- UE is configured with both *lowMobilityEvaluation* [13] criterion and *cellEdgeEvaluation* [13] criterion and *combineRelaxedMeasCondition* [13] not configured, and UE has fulfilled only the *cellEdgeEvaluation* [13] criterion.

When $Srxlev \leq S_{nonIntraSearchP}$ or $Squal \leq S_{nonIntraSearchQ}$ then te requirements defined in clause 4.2.2.4 apply for this clause except that:

- T_{detect,NR_Inter} as specified in Table 4.2.2.10.3-1 in TS 38.133 [6].

- $T_{measure,NR_Inter}$ as specified in Table 4.2.2.10.3-1 in TS 38.133 [6].
- $T_{evaluate,NR_Inter}$ as specified in Table 4.2.2.10.3-1 in TS 38.133 [6].

When Srxlev > SnonIntraSearchP and Squal > SnonIntraSearchQ and regardless of whether the UE is configured with *highPriorityMeasRelax* [13] or not, the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority}$_search where $T_{higher_priority_search}$ is described in clause 4.2.2.7

7.1.1.0.4.4 Measurements for UE fulfilling low mobility and not-at-cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- T331 timer is not running for EMR measurements on inter-frequency NR carrier, and
- UE is configured with both *lowMobilityEvaluation* [13] criterion and *cellEdgeEvaluation* [13] criterion, and
- Has also fulfilled both criteria, and
- less than 1 hour have passed since measurements for cell reselection were last performed

In this case the UE is not required to meet T_{detect,NR_Inter}, $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$ as defined in Table 4.2.2.4-1 of TS 38.133[6].

The normative reference for this requirement is TS 38.133 [6] clause 4.2.2.10.

7.1.1.1 NR SA FR2 cell re-selection

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC1, PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC1 and PC3.

7.1.1.1.1 Test purpose

The purpose of this test is to verify the requirement for the intra frequency NR cell reselection requirements specified in TS 38.133 clause 4.2.2.3.

7.1.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.1.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.1.1.1.

7.1.1.1.4 Test description

7.1.1.1.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.1.1.1.4.1-1.

Table 7.1.1.1.4.1-1: Supported test configurations for NR SA FR2 cell re-selection

Configuration	Description
7.1.1.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.1.1.1-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 7.1.1.1.4.1-2.

Table 7.1.1.1.4.1-2: Initial conditions for NR SA FR2 cell re-selection

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.1.1.1.4.1-3.

2. Message contents are defined in clause 7.1.1.1.4.3.

3. There is one NR carrier and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.1.1.1.4.1-3: General test parameters for NR SA FR2 cell re-selection

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	
	Neighbour cells		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	PC2, PC3, PC4	s	1, 2	135	T2 needs to be defined so that cell re-selection reaction time is taken into account.
	PC1			265	
T3	PC2, PC3, PC4	s	1, 2	35	T3 needs to be defined so that cell re-selection reaction time is taken into account.
	PC1			65	

7.1.1.1.4.2 Test procedure

Two cells are deployed in the test, which are one FR2 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 3 successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Set Cell 2 physical cell identity = initial Cell 2 physical cell identity.

2. Set the parameters according to T1 in Table 7.1.1.1.5-1. T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for one iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.1.1.1.5-1.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 130 seconds for PC2, PC3, PC4 and within 258 seconds for PC1 from the beginning of time period T2, then count a success for the event “Re-select newly detected Cell 2”. Otherwise count a fail for the event “Re-select newly detected Cell 2”.

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 12.

7a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 7.1.1.1.5-1.

9. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

10. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 27 seconds for PC2, PC3, PC4 and within 53 seconds for PC1 from the beginning of time period T3, then count a success for the event “Re-select already detected Cell 1”. Otherwise count a fail for the event “Re-select already detected Cell 1”.

11. If the UE has re-selected Cell 1 within T3, after the re-selection or when T3 expires, continues with step 11a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 12.

11a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

12. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

13. Repeat step 2-12 until a test verdict has been achieved.
Each of the events “Re-select newly detected Cell 2” and “Re-select already detected Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
If both events pass, the test passes. If one event fails, the test fails.

7.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.1.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 7.1.1.1.4.3-1A: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3				
Information Element		**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {				
cellSelectionInfo SEQUENCE {				
q-RxLevMin	PC3	-60	Actual value is -60*2 = -120dBm	7.1.1.1-1
		-58	Actual value is -58*2 = -116dBm	7.1.1.1-2
	PC1	-51	Actual value is -51*2 = -102dBm	7.1.1.1-1
		-49	Actual value is -49*2 = -98dBm	7.1.1.1-2
}				
}				

Table 7.1.1.1.4.3-1B: SIB2 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-1 with condition SMTC.1 and Synchronous cells				
Information Element		**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {				
intraFreqCellReselectionInfo SEQUENCE {				
q-RxLevMin	PC3	-60	Actual value is -60*2 = -120dBm	7.1.1.1-1
		-58	Actual value is -58*2 = -116dBm	7.1.1.1-2
	PC1	-51	Actual value is -51*2 = -102dBm	7.1.1.1-1
		-49	Actual value is -49*2 = -98dBm	7.1.1.1-2
s-IntraSearchP	PC3	25	Actual value is 25*2 = 50dB	
	PC1	31	Actual value is 31*2 = 62dB	
}				
}				

Table 7.1.1.1.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		
}			

7.1.1.1.5 Test requirement

Tables 7.1.1.1.4.1-3 and 7.1.1.1.5-1 define the primary level settings including test tolerances for intra frequency NR cell re-selection test case.

Table 7.1.1.1.5-1: Cell specific test parameters for NR SA FR2 cell re-selection

Parameter	**Unit**	**Test config.**	**Cell 1**			**Cell 2**		
			T1	**T2**	**T3**	**T1**	**T2**	**T3**
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			SR.3.1 TDD		
		2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
		2	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
		2	CCR.3.1 TDD			CCR.3.1 TDD		

SSB configuration			1	SSB.3 FR2			SSB.7 FR2		
			2	SSB.4 FR2			SSB.8 FR2		
OCNG Pattern			1, 2	OP.4			OP.4		
Initial DL BWP configuration			1, 2	DLBWP.0.1			DLBWP.0.1		
BWchannel		MHz	1, 2	100: NRB,c = 66			100: NRB,c = 66		
Data RBs allocated			1, 2	66			66		
Initial UL BWP configuration			1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS			1, 2	SSB			SSB		
Qrxlevmin	PC3	dBm/SCS	1	-120 Note 6			-120 Note 6		
			2	-117 Note 6			-117 Note 6		
	PC1		1	-101 Note 6			-101 Note 6		
			2	-98 Note 6			-98 Note 6		
Pcompensation		dB	1, 2	0			0		
$Qhyst_s$		dB	1, 2	0			0		
$Qoffset_{s,n}$		dB	1, 2	0			0		
Cell_selection_and_ reselection_quality_measurement			1, 2	SS-RSRP			SS-RSRP		
AoA setup			1, 2	Setup 1 defined in A. 9.1			Setup 1 defined in A. 9.1		
Beam assumption Note 4			1,2	Rough					
$\hat{E}_s/I_{ot\ \mathrm{BB}}$ Note 5		dB	1	7.56	-3.34	1.61	- infinity	1.61	-3.34
			2						
N_{oc} Note2		dBm/SCS	1	-93					
			2	-90					
N_{oc} Note2		dBm/15 kHz	1	-102					
			2						
$\hat{E}_s/N_{oc}$		dB	1	8	-2.9	2.05	- infinity	2.05	-2.9
			2						
SS-RSRP Note3	PC3	dBm/SCS	1	-85	-95.9	-90.9	- infinity	-90.9	-95.9
			2	-82	-92.9	-87.9	- infinity	-87.9	-92.9
	PC1		1	-85	-95.5	-90.5	- infinity	-90.5	-95.5
			2	-82	-92.5	-87.5	- infinity	-87.5	-92.5
Io		dBm/95.04 MHz	1	-60.53	-67.37	-65.01	-69.17	-65.01	-67.37
			2	-57.52	-64.39	-62.33	-66.16	-62.33	-64.39
Treselection		s	1, 2	0	0	0	0	0	0
SintrasearchP	PC3	dB	1, 2	50			50		
	PC1			62			62		
Propagation Condition			1, 2	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 6: Including the test tolerance given in Annex F.

The cell re-selection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility on Cell 2.

The cell re-selection delay to a newly detectable cell test requirement in this case is expressed as:

Cell re-selection delay to a newly detectable cell = T_{detect,NR_Intra} + T_{SI-NR}

T_{detect,NR_Intra} =

256 s for PC1, and

128 s for PC2, PC3, PC4; as specified in TS 38.133 [6] clause 4.2.2.3.

T_{SI-NR} = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

The cell re-selection delay to a newly detectable cell shall be less than a total of

257.28 seconds for PC1, and

129.28 seconds for PC2, PC3, PC4 in this test case (note: this gives a total of 129.28 seconds but the test allows 130 seconds for PC2, PC3, PC4 and 258 seconds for PC1).

The cell re-selection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility on Cell 1.

The cell re-selection delay to an already detected cell test requirement in this case is expressed as:

Cell re-selection to an already detected cell delay = $T_{evaluate,NR_Intra}$ + T_{SI-NR}

$T_{evaluate,NR_Intra}$ =

51.2 s for PC1 and

25.6 s for PC2, PC3, PC4; as specified in TS 38.133 [6] clause 4.2.2.3.

T_{SI-NR} = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

The cell re-selection delay to an already detected cell shall be less than a total of

52.48 seconds for PC1

26.88 seconds for PC2, PC3, PC4 in this test case (note: this gives a total of 26.88 seconds but the test allows 27 seconds for PC2, PC3, PC4 and 53 seconds for PC1).

For the test to pass, both events above shall pass.

The statistical pass/ fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

7.1.1.2 NR SA FR2-FR2 cell re-selection

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

7.1.1.2.1 Test purpose

The purpose of this test is to verify the requirement for the inter frequency NR cell reselection requirements specified in TS 38.133 clause 4.2.2.4.

7.1.1.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.1.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.1.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.1.1.2.

7.1.1.2.4 Test description

7.1.1.2.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.1.1.2.4.1-1.

Table 7.1.1.2.4.1-1: Supported test configurations for NR SA FR2-FR2 cell re-selection

Configuration	Description for serving cell	Description for target cell
7.1.1.2-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.1.1.2-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 7.1.1.2.4.1-2.

Table 7.1.1.2.4.1-2: Initial conditions for NR SA FR2-FR2 cell re-selection

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.1.1.2.4.1-3.
2. Message contents are defined in clause 7.1.1.2.4.3.
3. There is two NR carrier and 2 NR Cells specified in the test. Cell 2 is the PCell and Cell 1 is the neighbour cell in a different carrier than cell 2. Cell 1 and Cell 2 are configured according to Annex C.1.2.

Table 7.1.1.2.4.1-3: General test parameters for NR SA FR2-FR2 cell re-selection

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2	Cell1	
T1 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2	Cell2	
T3 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	

SMTC configuration		1, 2	SMTC.1	
DRX cycle length	s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2	Not configured	
T1	s	1, 2	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2	95	T3 needs to be defined so that cell re-selection reaction time is taken into account.

7.1.1.2.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one of the NR carriers. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 1.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

2. Set the parameters according to T1 in Table 7.1.1.2.5-1. Propagation conditions are set according to Annex B clause B.1.1. T1 starts.

3. Void.

4. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, Cell 1.

5. If the UE responds on lower priority cell, Cell 1 during time duration T1 within 27 seconds from the beginning of time period T1, then count a success for the event “Re-select lower priority Cell 1”. Otherwise count a fail for the event “Re-select lower priority Cell 1”.

6. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 6a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 12.

6a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

7. The SS shall switch the power setting from T1 to T2 as specified in Table 7.1.1.2.5-1. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) shall be changed to ensure Cell 2 is not detected by the UE.

8. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 7.1.1.2.5-1.

9. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, Cell 2.

10. If the UE responds on higher priority cell, Cell 2 during time duration T3 within 87 seconds from the beginning of time period T3, then count a success for the event “Re-select higher priority Cell 2”. Otherwise count a fail for the event “Re-select higher priority Cell 2”.

11. If the UE has re-selected Cell 2 within T3, after the re-selection or when T3 expires, continues with step 11a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and continue with step 12.

11a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

12. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

13. Repeat step 3-12 until a test verdict has been achieved.
Each of the events "Re-select lower priority Cell 1" and "Re-select higher priority Cell 2" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
If both events pass, the test passes. If one event fails, the test fails.

7.1.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.1.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.2-1 for NR Cell 1
Default RRC messages and information elements contents exceptions	

Table 7.1.1.2.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		
}			

Table 7.1.1.2.4.3-3: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-70	Actual value is -62*2 = -140dBm	7.1.1.2-1 and Cell 1
	-68	Actual value is -62*2 = -136dBm	7.1.1.2-2 and Cell 1
	-62	Actual value is -62*2 = -124dBm	7.1.1.2-1 and Cell 2
	-60	Actual value is -62*2 = -120dBm	7.1.1.2-2 and Cell 2
}			
}			

Table 7.1.1.2.4.3-4: SIB2(Cell2)

Derivation Path: Table H.2.2-1 with condition NR Cell 2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	31	Actual value is 31*2 = 62dBm	
threshServingLowP	31	Actual value is 31*2 = 62dBm	

}			
}			

Table 7.1.1.2.4.3-5: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2 with condition NR Cell 1, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-70	Actual value = -70*2 = -140dBm	7.1.1.2-1
	-68	Actual value = -68*2 = -136dBm	7.1.1.2-2
threshX-HighP	16	Actual value is 16*2 = 32dBm	
}			
}			
}			

Table 7.1.1.2.4.3-6: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2 with condition NR Cell 2, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-62	Actual value = -62*2 = -124dBm	7.1.1.2-1
	-60	Actual value = -60*2 = -120dBm	7.1.1.2-2
threshX-LowP	9	Actual value = 9*2 = 18dBm	
}			
}			
}			

7.1.1.2.5 Test requirement

Tables 7.1.1.2.4.1-3 and 7.1.1.2.5-1 define the primary level settings including test tolerances for inter frequency NR cell re-selection test case.

Table 7.1.1.2.5-1: Cell specific test parameters for NR SA FR2-FR2 cell re-selection

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1, 2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET parameters		1, 2	CR.3.1 TDD			CR.3.1 TDD		
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD			CCR.3.1 TDD		
OCNG Pattern		1, 2	OP.1			OP.1		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
BWchannel	MHz	1, 2	100: NRB,c = 66			100: NRB,c = 66		
Data RBs allocated		1, 2	66			66		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-140			-124 Note 6		
		2	-137			-121 Note 6		
Pcompensation	dB	1, 2	0			0		
$Qhyst_s$	dB	1, 2	0			0		

$Qoffset_{s,n}$	dB	1, 2	0			0		
Cell_selection_and_ reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A. 9.1			Setup 1 defined in A. 9.1		
Beam assumption Note 4		1,2	Rough					
$\hat{E}_s/I_{ot\ \mathrm{BB}}$ Note 5	dB	1	10.06	10.06	7.56	-3.34	-infinity	8.06
		2						
N_{oc} Note2	dBm/SCS	1	-93					
		2	-90					
N_{oc} Note2	dBm/15 kHz	1	-102					
		2						
$\hat{E}_s/N_{oc}$	dB	1	10.5	10.5	8	2.9	-infinity	8.5
		2						
SS-RSRP Note3	dBm/SCS	1	-82.5	-82.5	-85	95.9	-infinity	84.5
		2	-79.5	-79.5	-82	-92.9	-infinity	-91.5
Io	dBm/95.04 MHz	1	-53.11	-53.11	-55.34	-62.18	-63.98	-54.91
		2	-53.11	-53.11	-55.34	-62.18	-63.98	-54.91
Treselection	s	1, 2	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2	50			62 Note 6		
$Thresh_{x,highP}$	dB	1, 2	32 Note 6			48		
$Thresh_{serving,lowP}$	dB	1, 2	44			62 Note 6		
$Thresh_{x,lowP}$	dB	1, 2	50			18 Note 6		
Propagation Condition		1, 2	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 6: Including the test tolerance given in Annex F.

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility on cell 2.

The cell re-selection delay to a higher priority cell test requirement in this case is expressed as:

Cell re-selection delay to a higher priority cell = $T_{higher_priority_search} + T_{evaluate,\ NR_\ inter} + T_{SI\text{-}NR}$

$T_{higher_priority_search}$ = 60 s, as specified in TS 38.133 [6] clause 4.2.2.7;

$T_{evaluate,\ NR_\ inter}$ = 25.6 s, as specified in TS 38.133 [6] clause 4.2.2.4;

$T_{SI\text{-}NR}$ = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

The cell re-selection delay to a higher priority cell shall be less than a total of 86.88 seconds in this test case (note: this gives a total of 86.88 seconds but this test allows 87 seconds)

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility on cell 1.

The cell re-selection delay to a lower priority cell test requirement in this case is expressed as:

Cell re-selection delay to a lower priority cell = $T_{evaluate, NR_ inter}$ + T_{SI-NR}

$T_{evaluate, NR_ inter}$ = 25.6 s, as specified in TS 38.133 [6] clause 4.2.2.4;

T_{SI-NR} = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

The cell re-selection delay to a lower priority cell shall be less than a total of 26.88 seconds in this test case (note: this gives a total of 26.88 seconds but this test allows 27 seconds)

For the test to pass, both events above shall pass.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

7.1.1.3 NR SA FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

7.1.1.3.1 Test purpose

The purpose of this test is to verify the requirement for the intra frequency NR cell reselection requirements when UE fulfils the low mobility relaxed measurement criterion specified in TS 38.133 clause 4.2.2.9.

7.1.1.3.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards supporting relaxed RRM measurement.

7.1.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.1.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.1.1.3.

7.1.1.3.4 Test description

7.1.1.3.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.1.1.3.4.1-1.

Table 7.1.1.3.4.1-1: Supported test configurations for NR SA FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Configuration	Description
7.1.1.3-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.1.1.3-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 7.1.1.3.4.1-2.

Table 7.1.1.3.4.1-2: Initial conditions for NR SA FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.

Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.1.1.3.4.1-3.

2. Message contents are defined in clause 7.1.1.3.4.3.

3. There is one NR carrier and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.1.1.3.4.1-3: General test parameters for NR SA FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2	Cell2	
T1 end condition	Active cell		1, 2	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1,2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	100	
T2		s	1, 2	100	

7.1.1.3.4.2 Test procedure

Two cells are deployed in the test, which are one FR2 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 2 successive time periods, with time duration of T1, T2 respectively. Both cell 1 and cell2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas.

The UE is configured only low mobility criterion defined in clause 5.2.4.9.1 in TS 38.304 [30]. So, Cell 1 configures the UE as follows:

- *lowMobilityEvaluation* [2] is configured according to the parameters listed in Table 7.1.1.3.5-1;
- *cellEdgeEvaluation* [2] is not configured;
- *combineRelaxedMeasCondition* [2] is not configured

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.1.1.3.5-1. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 2.

4. If the UE responds on Cell 2 during time duration T1 within 100 seconds from the beginning of time period T1, then count a success for cell reselection. Otherwise count a fail for cell reselection.

5. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 10.

5a The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 7.1.1.3.5-1. T2 starts.

7. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

8. If the UE responds to Cell 1 during time duration T2 within 100 seconds from the beginning of time period T2, then count a success for cell reselection. Otherwise count a fail for cell reselection.

9. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 10. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and continue with step 10.

10. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.1.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.1.1.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 7.1.1.3.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		
}			

Table 7.1.1.3.4.3-2A: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-60	Actual value is -60*2 = -120dBm	7.1.1.3-1

	-58	Actual value is -58*2 = -116dBm	7.1.1.3-2
}			
}			

Table 7.1.1.3.4.3-3: SIB2

Derivation Path: Table H.2.1-1 with condition SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
q-RxLevMin	-60	Actual value is -60*2 = -120dBm	7.1.1.3-1
	-58	Actual value is -58*2 = -116dBm	7.1.1.3-2
s-IntraSearchP	25	Actual value is 25*2 = 50dB	
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16 SEQUENCE {			
s-SearchDeltaP-r16	dB6		
t-SearchDeltaP-r16	s5		
}			
cellEdgeEvaluation-r16	Not present		
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

7.1.1.3.5 Test requirement

Tables 7.1.1.3.4.1-3 and 7.1.1.3.5-1 define the primary level settings including test tolerances for intra frequency NR cell re-selection test case for UE fulfilling low mobility relaxed measurement criterion.

Table 7.1.1.3.5-1: Cell specific test parameters for NR SA FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	SSB.3 FR2		SSB.7 FR2	
		2	SSB.4 FR2		SSB.8 FR2	
OCNG Pattern		1, 2	OP.4		OP.4	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-120 Note 6		-120 Note 6	
		2	-117 Note 6		-117 Note 6	

$S_{SearchDeltaP}$	dB	1, 2	6		6	
$T_{SearchDeltaP}$	s	1,2	5		5	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s, n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.9.1		Setup 1 defined in A.9.1	
Beam assumption Note 4		1,2	Rough		Rough	
$\hat{E}_s/I_{ot\ \mathrm{BB}}$ Note 5	dB	1	-3.34	1.61	1.61	-3.64
		2				
N_{oc} Note2	dBm/SCS	1	-93			
		2	-90			
N_{oc} Note2	dBm/15 kHz	1	-102			
		2				
$\hat{E}_s/N_{oc}$	dB	1	-2.9	2.05	2.05	-2.9
		2				
SS-RSRP Note3	dBm/SCS	1	-95.9	-90.9	-90.9	-95.9
		2	-92.9	-87.9	-87.9	-92.9
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-67.37	-65.01	-65.01	-67.37
		2	-64.36	-62.00	-62.00	-64.36
Treselection	s	1, 2	0	0	0	0
SintrasearchP	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 6: Including the test tolerance given in Annex F.

The cell reselection delay to an already detected cell for UE fulfilling low mobility relaxed criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell reselection delay to an already detected cell for UE fulfilling low mobility relaxed criterion is also defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected cell shall be less than 79 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

The cell re-selection delay to an already detected cell test requirement in this case is expressed as:

Cell re-selection to an already detected cell delay = $T_{evaluate,NR_Intra} + T_{SI\text{-}NR}$

$T_{evaluate,NR_Intra}$ = 76.8 s; as specified in TS 38.133 [6] clause 4.2.2.9.

T_{SI-NR} = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

This gives a total of 78.08 s, allow 79s for the cell re-selection delay to an already detected cell for UE fulfilling low mobility criterion in the test case.

7.1.1.4 NR SA FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

7.1.1.4.1 Test purpose

The purpose of this test is to verify the requirement for the intra frequency NR cell reselection requirements when UE fulfils the not-at-cell edge relaxed measurement criterion specified in TS 38.133 clause 4.2.2.9.

7.1.1.4.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards supporting relaxed RRM measurement.

7.1.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.1.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.1.1.4.

7.1.1.4.4 Test description

7.1.1.4.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.1.1.4.4.1-1.

Table 7.1.1.4.4.1-1: Supported test configurations for NR SA FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Configuration	Description
7.1.1.4-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.1.1.4-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 7.1.1.4.4.1-2.

Table 7.1.1.4.4.1-2: Initial conditions for NR SA FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.1.1.4.4.1-3.

2. Message contents are defined in clause 7.1.1.4.4.3.

3. There is one NR carrier and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.1.1.4.4.1-3: General test parameters for NR SA FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2	Cell2	
T1 end condition	Active cell		1, 2	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cells		1,2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	100	
T2		s	1, 2	100	

7.1.1.4.4.2 Test procedure

Two cells are deployed in the test, which are one FR2 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 2 successive time periods, with time duration of T1, T2 respectively. Both cell 1 and cell2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas.

The UE is configured only not-at-cell edge criterion defined in clause 5.2.4.9.1 in TS 38.304 [30]. So, Cell 1 configures the UE as follows:

- *lowMobilityEvaluation* [2] is not configured;
- *cellEdgeEvaluation* [2] is configured according to the parameters listed in Table 7.1.1.4.5-1;
- *combineRelaxedMeasCondition* [2] is not configured

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.1.1.4.5-1. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 2.

4. If the UE responds on Cell 2 during time duration T1 within 100 seconds from the beginning of time period T1, then count a success for cell reselection. Otherwise count a fail for cell reselection.

5. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 10.

5a The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 7.1.1.4.5-1. T2 starts.

7. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

8. If the UE responds to Cell 1 during time duration T2 within 100 seconds from the beginning of time period T2, then count a success for cell reselection. Otherwise count a fail for cell reselection.

9. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 10. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and continue with step 10.

10. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.1.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.1.1.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 7.1.1.4.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		
}			

Table 7.1.1.4.4.3-2A: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-60	Actual value is -60*2 = -120dBm	7.1.1.4-1
	-58	Actual value is -58*2 = -116dBm	7.1.1.4-2
}			
}			

Table 7.1.1.4.4.3-3: SIB2 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-1 with condition SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			

q-RxLevMin	-60	Actual value is -60*2 = -120dBm	7.1.1.4-1
	-58	Actual value is -58*2 = -116dBm	7.1.1.4-2
s-IntraSearchP	25	Actual value is 25*2 = 50dB	
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16	Not present		
cellEdgeEvaluation-r16 SEQUENCE {			
s-SearchThresholdP-r16	4	Actual value is 4*2 = 8dBm	
}			
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

7.1.1.4.5 Test requirement

Tables 7.1.1.4.4.1-3 and 7.1.1.4.5-1 define the primary level settings including test tolerances for intra frequency NR cell re-selection test case for UE fulfilling not-at-cell edge relaxed measurement criterion.

Table 7.1.1.4.5-1: Cell specific test parameters for NR SA FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	SSB.3 FR2		SSB.7 FR2	
		2	SSB.4 FR2		SSB.8 FR2	
OCNG Pattern		1, 2	OP.4		OP.4	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-120 Note 6		-120 Note 6	
		2	-117 Note 6		-117 Note 6	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s,n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.9.1		Setup 1 defined in A.9.1	
Beam assumption Note 4		1,2	Rough		Rough	
$\hat{E}_s/I_{ot\,\mathrm{BB}}$ Note 5	dB	1	-3.34	1.61	1.61	-3.34
		2				

N_{oc} Note2	dBm/SCS	1	-93			
		2	-90			
N_{oc} Note2	dBm/15 kHz	1	-102			
		2				
$\hat{E}_s / N_{oc}$	dB	1	-2.90	2.05	2.05	-2.90
		2				
SS-RSRP Note3	dBm/SCS	1	-95.9	-90.9	-90.9	-95.9
		2	-92.9	-87.9	-87.9	-92.9
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-67.37	-65.01	-65.01	-67.37
		2	-64.36	-62.00	-62.00	-64.36
Treselection	s	1, 2	0	0	0	0
$S_{SearchThresholdP}$		1, 2	8 Note 6	8 Note 6	8 Note 6	8 Note 6
SintrasearchP	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 6: Including the test tolerance given in Annex F.

The cell reselection delay to an already detected cell for UE fulfilling not-at-cell edge relaxed criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell reselection delay to an already detected cell for UE fulfilling not-at-cell edge relaxed criterion is also defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected cell shall be less than 79 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

The cell re-selection delay to an already detected cell test requirement in this case is expressed as:

Cell re-selection to an already detected cell delay = $T_{evaluate,NR_Intra} + T_{SI-NR}$

$T_{evaluate,NR_Intra}$ = 76.8 s; as specified in TS 38.133 [6] clause 4.2.2.9.

T_{SI-NR} = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

This gives a total of 78.08 s, allow 79s for the cell re-selection delay to an already detected cell for UE fulfilling not-at-cell edge criterion in the test case.

7.1.1.5 NR SA FR2-FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.

- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

7.1.1.5.1 Test purpose

The purpose of this test is to verify the requirement for the inter frequency NR cell reselection requirements when UE fulfils the low mobility relaxed measurement criterion specified in TS 38.133 clause 4.2.2.10.

7.1.1.5.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards supporting relaxed RRM measurement.

7.1.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.1.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.7.1.1.5.

7.1.1.5.4 Test description

7.1.1.5.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.1.1.5.4.1-1.

Table 7.1.1.5.4.1-1: Supported test configurations for NR SA FR2-FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Configuration	Description
7.1.1.5-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.1.1.5-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 7.1.1.5.4.1-2.

Table 7.1.1.5.4.1-2: Initial conditions for NR SA FR2-FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.1.1.5.4.1-3.

2. Message contents are defined in clause 7.1.1.5.4.3.

3. There is one NR carrier and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.1.1.5.4.1-3: General test parameters for NR SA FR2-FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter	Unit	Test configuration	Value	Comment

Initial condition	Active cell		1, 2	Cell2	The UE camps on cell2 and fulfils low mobility (*lowMobilityEvalutation* [2]) criterion.
	Neighbour cell		1, 2	Cell1	
T1 final condition	Active cell		1, 2	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2	Cell2	
T2 final condition	Active cell		1, 2	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell			Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTC configuration			1, 2	SMTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	85	T1 needs to be long enough to allow cell re-selection to already known cell1
T2		s	1, 2	85	T2 needs to be long enough to allow cell re-selection to already known cell2

7.1.1.5.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one of the NR carriers. The test consists of two successive time periods, with time duration of T1, T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1.

The UE is configured only low mobility criterion defined in clause 5.2.4.9.1 in TS 38.304 [30]. So, Cell 1 configures the UE as follows:

- *lowMobilityEvaluation* [2] is configured according to the parameters listed in Table 7.1.1.5.5-1;
- *cellEdgeEvaluation* [2] is not configured;
- *combineRelaxedMeasCondition* [2] is not configured

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 7.1.1.5.5-1. T1 starts.
3. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.
4. If the UE responds on lower priority Cell 1 during time duration T1 within 85 seconds from the beginning of time period T1, then count a success for the event “Re-select lower priority Cell 1”. Otherwise count a fail for the event “Re-select lower priority Cell 1”

5. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 10.

5a The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 7.1.1.5.5-1. T2 starts.

7. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 2.

8. If the UE responds to higher priority Cell 2 during time duration T2 within 85 seconds from the beginning of time period T2, then count a success for the event “Re-select higher priority Cell 2”. Otherwise count a fail for the event “Re-select higher priority Cell 2”

9. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 10. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and continue with step 10.

10. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until a test verdict has been achieved.
Each of the events “Re-select lower priority Cell 1” and “Re-select higher priority Cell 2” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
If both events pass, the test passes. If one event fails, the test fails.

7.1.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.1.1.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	

Table 7.1.1.5.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		
}			

Table 7.1.1.5.4.3-2A: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-70	Actual value is -62*2 = -140dBm	7.1.1.5-1 and Cell 1
	-68	Actual value is -62*2 = -136dBm	7.1.1.5-2 and Cell 1
	-62	Actual value is -62*2 = -124dBm	7.1.1.5-1 and Cell 2
	-60	Actual value is -62*2 = -120dBm	7.1.1.5-2 and Cell 2
}			

}			

Table 7.1.1.5.4.3-3: SIB2 (Cell 1 and Cell 2)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	31	Actual value is 31*2 = 62dBm	Cell 2
threshServingLowP	31	Actual value is 31*2 = 62dBm	Cell 2
cellReselectionPriority	4		Cell 1
	5		Cell 2
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16 SEQUENCE {			
s-SearchDeltaP-r16	dB12		
t-SearchDeltaP-r16	s5		
}			
cellEdgeEvaluation-r16	Not present		
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 7.1.1.5.4.3-4: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2 with condition NR Cell 1, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-70	Actual value = -70*2 = -140dBm	7.1.1.2-1
	-68	Actual value = -68*2 = -136dBm	7.1.1.2-2
threshX-HighP	16	Actual value is 16*2 = 32dBm	
}			
}			
}			

Table 7.1.1.5.4.3-5: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2 with condition NR Cell 2, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-62	Actual value = -62*2 = -124dBm	7.1.1.2-1
	-60	Actual value = -60*2 = -120dBm	7.1.1.2-2
threshX-LowP	9	Actual value = 9*2 = 18dBm	
}			
}			

}			

7.1.1.5.5 Test requirement

Tables 7.1.1.5.4.1-3 and 7.1.1.5.5-1 define the primary level settings including test tolerances for inter frequency NR cell re-selection test case for UE fulfilling low mobility relaxed measurement criterion.

Table 7.1.1.5.5-1: Cell specific test parameters for NR SA FR2-FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
BWchannel	MHz	1, 2	100: NRB,c = 66		100: NRB,c = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-124 Note6	
		2	-137		-121 Note6	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s,n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.9.1		Setup 1 defined in A.9.1	
Beam assumption Note 4		1, 2	Rough		Rough	
$\hat{E}_s/I_{ot\ \mathrm{BB}}$ Note 5	dB	1, 2	10.06	7.56	-3.34	8.06
N_{oc} Note2	dBm/SCS	1	-93		-93	
		2	-90		-90	
N_{oc} Note2	dBm/15 kHz	1, 2	-102		-102	
$\hat{E}_s/N_{oc}$	dB	1, 2	10.5	8	-2.9	8.5
SS-RSRP Note3	dBm/SCS	1	-82.5	-85	-95.9	-84.5
		2	-79.5	-82	-92.9	-81.5
Io	dBm/95.04 MHz	1	-53.11	-55.34	-62.18	-54.91
		2	-53.11	-55.34	-62.18	-54.91
TreselectionNR	s	1, 2	0		0	
SnonintrasearchP	dB	1, 2	50		Not sent	
$S_{SearchDeltaP}$	dB	1, 2	12 Note6		12 Note6	
$T_{SearchDeltaP}$	s	1, 2	5		5	
$Thresh_{x,high}$	dB	1, 2	32 Note6		48	
$Thresh_{serving,low}$	dB	1, 2	44		62 Note6	
$Thresh_{x,low}$	dB	1, 2	50		18 Note6	
Propagation Condition		1, 2	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 6:	Including the test tolerance given in Annex F.

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 79 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 79 s.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{evaluate,\ NR_\ inter}$ + $T_{SI\text{-}NR}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{evaluate,\ NR_\ inter}$ + $T_{SI\text{-}NR}$

Where:

$T_{evaluate,\ NR_\ inter}$ as speciied in TS 38.133 Table 4.2.2.10.2-1 in clause 4.2.2.10.2

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 78.08 s, allow 79 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling low mobility criterion in the test case.

This gives a total of 78.08 s, allow 79 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling low mobility criterion in the test case.

For the test to pass, both events above shall pass.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

7.1.1.6 NR SA FR2-FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

7.1.1.6.1 Test purpose

The purpose of this test is to verify the requirement for the inter frequency NR cell reselection requirements when UE fulfils the not-at-cell edge relaxed measurement criterion specified in TS 38.133 clause 4.2.2.10.

7.1.1.6.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards supporting relaxed RRM measurement.

7.1.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.1.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.7.1.1.6.

7.1.1.6.4 Test description

7.1.1.6.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.1.1.6.4.1-1.

Table 7.1.1.6.4.1-1: Supported test configurations for NR SA FR2-FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Configuration	Description
7.1.1.6-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.1.1.6-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 7.1.1.6.4.1-2.

Table 7.1.1.6.4.1-2: Initial conditions for NR SA FR2-FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.1.1.6.4.1-3.
2. Message contents are defined in clause 7.1.1.6.4.3.
3. There is one NR carrier and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.1.1.6.4.1-3: General test parameters for NR SA FR2-FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell2 and fulfils not-at-cell edge (*cellEdgeEvaluation* [2]) criterion.
	Neighbour cell		1, 2	Cell1	

T1 final condition	Active cell		1, 2	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2	Cell2	
T2 final condition	Active cell		1, 2	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTC configuration			1, 2	SMTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	85	T1 needs to be long enough to allow cell re-selection to already known cell.
T2		s	1, 2	85	T2 needs to be long enough to allow cell re-selection to already known cell.

7.1.1.6.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one of the NR carriers. The test consists of two successive time periods, with time duration of T1, T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1.

The UE is configured only not-at-cell edge criterion defined in clause 5.2.4.9.1 in TS 38.304 [30]. So, Cell 1 configures the UE as follows:

- *lowMobilityEvaluation* [2] is not configured;
- *cellEdgeEvaluation* [2] is configured according to the parameters listed in Table 7.1.1.6.5-1;
- *combineRelaxedMeasCondition* [2] is not configured

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 7.1.1.6.5-1. T1 starts.
3. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.
4. If the UE responds on lower priority Cell 1 during time duration T1 within 85 seconds from the beginning of time period T1, then count a success for the event “Re-select lower priority Cell 1”. Otherwise count a fail for the event “Re-select lower priority Cell 1”
5. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 10.

5a The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 7.1.1.6.5-1. T2 starts.

7. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 2.

8. If the UE responds to higher priority Cell 2 during time duration T2 within 85 seconds from the beginning of time period T2, then count a success for the event “Re-select higher priority Cell 2”. Otherwise count a fail for the event “Re-select higher priority Cell 2”

9. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 10. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and continue with step 10.

10. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until a test verdict has been achieved.
    Each of the events “Re-select lower priority Cell 1” and “Re-select higher priority Cell 2” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

7.1.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.1.1.6.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	

Table 7.1.1.6.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		
}			

Table 7.1.1.6.4.3-2A: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-70	Actual value is -62*2 = -140dBm	7.1.1.6-1 and Cell 1
	-68	Actual value is -62*2 = -136dBm	7.1.1.6-2 and Cell 1
	-62	Actual value is -62*2 = -124dBm	7.1.1.6-1 and Cell 2
	-60	Actual value is -62*2 = -120dBm	7.1.1.6-2 and Cell 2
}			
}			

Table 7.1.1.6.4.3-3: SIB2 (Cell 1 and Cell 2)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			

cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	31	Actual value is 31*2 = 62dBm	Cell 2
threshServingLowP	31	Actual value is 31*2 = 62dBm	Cell 2
cellReselectionPriority	4		Cell 1
	5		Cell 2
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16	Not present		
cellEdgeEvaluation-r16 SEQUENCE {			
s-SearchThresholdP-r16	18	Actual value = 18*2 = 36dB	Cell 1
	6	Actual value = 6*2 = 12dB	Cell 2
}			
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 7.1.1.6.4.3-4: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2 with condition NR Cell 1, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-70	Actual value = -70*2 = -140dBm	7.1.1.6-1
	-68	Actual value = -68*2 = -136dBm	7.1.1.6-2
threshX-HighP	16	Actual value is 16*2 = 32dBm	
}			
}			
}			

Table 7.1.1.6.4.3-5: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2 with condition NR Cell 2, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-62	Actual value = -62*2 = -124dBm	7.1.1.6-1
	-60	Actual value = -60*2 = -120dBm	7.1.1.6-2
threshX-LowP	9	Actual value = 9*2 = 18dBm	
}			
}			
}			

7.1.1.6.5 Test requirement

Tables 7.1.1.6.4.1-3 and 7.1.1.6.5-1 define the primary level settings including test tolerances for inter frequency NR cell re-selection test case for UE fulfilling not-at-cell edge relaxed measurement criterion.

Table 7.1.1.6.5-1: Cell specific test parameters for NR SA FR2-FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-124 Note 6	
		2	-137		-121 Note 6	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s,n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.9.1		Setup 1 defined in A.9.1	
Beam assumption Note 4		1, 2	Rough		Rough	
$\hat{E}_s/I_{ot\ \mathrm{BB}}$ Note 5	dB	1, 2	10.06	7.56	-3.34	8.06
N_{oc} Note2	dBm/SCS	1	-93		-93	
		2	-90		-90	
N_{oc} Note2	dBm/15 kHz	1, 2	-102		-102	
$\hat{E}_s/N_{oc}$	dB	1, 2	10.5	8	-2.9	8.5
SS-RSRP Note3	dBm/SCS	1	-82.5	-85	-95.9	-84.5
		2	-79.5	-82	-92.9	-81.5
Io	dBm/95.04 MHz	1	-53.11	-55.34	-62.18	-54.91
		2	-53.11	-55.34	-62.18	-54.91
$S_{SearchThresholdP}$		1, 2	35	35	12 Note 6	12 Note 6
TreselectionNR	s	1, 2	0		0	
SnonintrasearchP	dB	1, 2	50		Not sent	
$Thresh_{x,high}$	dB	1, 2	32 Note 6		48	
$Thresh_{serving,low}$	dB	1, 2	44		62 Note 6	
$Thresh_{x,low}$	dB	1, 2	50		18 Note 6	
Propagation Condition		1, 2	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 6:	Including the test tolerance given in Annex F.

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 79 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 79 s.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{evaluate,\ NR_\ inter}$ + $T_{SI\text{-}NR}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{evaluate,\ NR_\ inter}$ + $T_{SI\text{-}NR}$

Where:

$T_{evaluate,\ NR_\ inter}$ as speciied in TS 38.133 Table 4.2.2.10.2-1 in clause 4.2.2.10.2

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 78.08 s, allow 79 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling not-at-cell edge criterion in the test case.

This gives a total of 78.08 s, allow 79 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling not-at-cell edge criterion in the test case.

For the test to pass, both events above shall pass.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

7.1.1.7 NR SA FR2 cell re-selection for power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC6
- This test case is incomplete for Test frequency f > 40.8 GHz
- Test tolerance and measurement uncertainty analysis are missing

7.1.1.7.1 Test Purpose

The purpose of this test is to verify the requirement for the intra frequency NR cell reselection requirements specified in TS 38.133 clause 4.2.2.3 for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*.

7.1.1.7.2 Test Applicability

This test applies to all types of NR UE power class 6 release 17 onwards that supports *highSpeedMeasFlagFR2-r17*.

7.1.1.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.1.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clauses 4.2.2.3 and A.7.1.1.7.

7.1.1.7.4 Test description

7.1.1.7.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.1.1.7.4.1-1.

Table 7.1.1.7.4.1-1: Supported test configurations for NR SA FR2 cell re-selection for PC6

Configuration	Description
7.1.1.7-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.1.1.7-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 7.1.1.7.4.1-2.

Table 7.1.1.7.4.1-2: Initial conditions for NR SA FR2 cell re-selection for PC6

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.1.1.7.4.1-3.

2. Message contents are defined in clause 7.1.1.7.4.3.

3. There is one NR carrier and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.1.1.7.4.1-3: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	
	Neighbour cell		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
RF Channel Number			1, 2	1	

Time offset between cells		1, 2	3 μs	Synchronous cells
Access Barring Information	-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration		1, 2	SMTC.1	
DRX cycle length	s	1, 2	0.32	The value shall be used for all cells in the test.
PRACH configuration index		1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2	Not configured	
highSpeedMeasFlagFR2-r17			Set 1	
T1	s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2	10	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2	5	T3 needs to be defined so that cell re-selection reaction time is taken into account.

7.1.1.7.4.2 Test Procedure

Two cells are deployed in the test, which are one FR2 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 3 successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Set Cell 2 physical cell identity = initial Cell 2 physical cell identity.

2. Set the parameters according to T1 in Table 7.1.1.7.5-1. T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for one iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.1.1.7.5-1.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 10 seconds from the beginning of time period T2, then count a success for the event “Re-select newly detected Cell 2”. Otherwise count a fail for the event “Re-select newly detected Cell 2”.

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 12.

7a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 7.1.1.7.5-1.

9. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

10. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 5 seconds from the beginning of time period T3, then count a success for the event “Re-select already detected Cell 1”. Otherwise count a fail for the event “Re-select already detected Cell 1”.

11. If the UE has re-selected Cell 1 within T3, after the re-selection or when T3 expires, continues with step 11a.Otherwise, if T3 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 12.

11a.The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

12. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

13. Repeat step 2-12 until a test verdict has been achieved.
    Each of the events “Re-select newly detected Cell 2” and “Re-select already detected Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

7.1.1.7.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.1.1.7.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	Table 4.6.3-169 in 38.508-1 [14] with condition R17 HST FR2

Table 7.1.1.7.4.3-1A: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-60	Actual value is -60*2 = -120dBm	7.1.1.7-1
	-58	Actual value is -58*2 = -116dBm	7.1.1.7-2
}			
}			

Table 7.1.1.7.4.3-1B: SIB2 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-1 with condition SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
q-RxLevMin	-60	Actual value is -60*2 = -120dBm	7.1.1.7-1
	-58	Actual value is -58*2 = -116dBm	7.1.1.7-2
s-IntraSearchP	25	Actual value is 25*2 = 50dB	
}			
}			

Table 7.1.1.7.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130

Information Element	Value/remark	Comment	Condition
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	102		
}			

Table 7.1.1.7.4.3-3: *HighSpeedConfigFR2*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-62C			
Information Element	**Value/remark**	**Comment**	**Condition**
HighSpeedConfigFR2-r17 ::= SEQUENCE {			
highSpeedMeasFlagFR2-r17	Set1		
}			

7.1.1.7.5 Test Requirements

Tables 7.1.1.7.4.1-3 and 7.1.1.7.5-1 define the primary level settings including test tolerances for intra frequency NR cell re-selection test case.

Table 7.1.1.7.5-1: Cell specific test parameters for NR cell re-selection for PC6

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			SR.3.1 TDD		
		2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
		2	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
		2	CCR.3.1 TDD			CCR.3.1 TDD		
SSB configuration		1	SSB.3 FR2			SSB.7 FR2		
		2	SSB.4 FR2			SSB.8 FR2		
OCNG Pattern		1, 2	OP.4			OP.4		
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1, 2	66			66		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-138			-138		
		2	-135			-135		
Pcompensation	dB	1, 2	0			0		
$Qhyst_s$	dB	1, 2	0			0		
$Qoffset_{s,n}$	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.9.1			Setup 1 defined in A.9.1		
$\hat{E}_s/I_{ot}$	dB	1	8	-3	1.5	-infinity	1.5	-3
		2						
Beam assumption[Note 4]		1,2	Rough					
N_{oc} [Note2]	dBm/SCS	1	-93					
		2	-90					
N_{oc} [Note2]	dBm/15 kHz	1	-102					
		2						

$\hat{E}_s / N_{oc}$	dB	1	8 +TT	-3 + TT	1.5 + TT	-infinity	1.5 + TT	-3 + TT
		2						
SS-RSRP Note3	dBm/SCS	1	-85+TT	-96+TT	-91.5+TT	-infinity	-91.5+TT	-96+TT
		2	-82+TT	-93+TT	-88.5+TT	-infinity	-88.5+TT	-93+TT
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-59.37+TT	-63.40+TT	-62.47+TT	-64.01	-62.47+TT	-63.40+TT
		2	-57.18+TT	-62.86+TT	-61.67+TT	-64.01+TT	-61.67+TT	-62.86+TT
Treselection	s	1, 2	0	0	0	0	0	0
SintrasearchP	dB	1, 2	50			50		
Propagation Condition		1,2	AWGN			AWGN 19444Hz		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

The cell re-selection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility on Cell 2.

The cell re-selection delay to a newly detectable cell test requirement in this case is expressed as:

Cell re-selection delay to a newly detectable cell = $T_{detect,NR_Intra} + T_{SI-NR}$

T_{detect,NR_Intra} = 5.12 s; as specified in table 7.1.1.0.1-3 (TS 38.133 [6] clause 4.2.2.3).

T_{SI-NR} = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

The cell re-selection delay to a newly detectable cell shall be less than a total of 6.4 s in this test case (note: this gives a total of 6.4 seconds, but the test allows 7 seconds).

The cell re-selection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 1 and starts to send preambles on the PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility on Cell 1.

The cell re-selection delay to an already detected cell test requirement in this case is expressed as:

Cell re-selection to an already detected cell delay = $T_{evaluate,NR_Intra} + T_{SI-NR}$

$T_{evaluate,NR_Intra}$ = 1.84 s; as specified in table 7.1.1.0.1-3 (TS 38.133 [6] clause 4.2.2.3).

T_{SI-NR} = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

The cell re-selection delay to an already detected cell shall be less than a total of 3.2 seconds in this test case (note: this gives a total of 3.2 seconds, but the test allows 4 seconds).

For the test to pass, both events above shall pass.

The statistical pass/ fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

7.1.1.8 NR SA FR2 inter-frequency cell re-selection for power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

Editor's Note: This test case is incomplete for the following configurations:

- Test tolerance and measurement uncertainty analysis are missing

7.1.1.8.1 Test Purpose

This test is to verify the requirement for the inter-frequency NR cell reselection requirements for UE that supports Idle mode inter-frequency measurement enhancement for HST in FR2 and configured with*highSpeedMeasFlagFR2-r17* as specified in TS 38.133 [6] clause 4.2.2.4.

7.1.1.8.2 Test Applicability

This test applies to all types of NR UE power class 6 release 18 onwards that support *highSpeedMeasFlagFR2- r17*.

7.1.1.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.1.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clauses 4.2.2.4 and A.7.1.1.8.

7.1.1.8.4 Test description

7.1.1.8.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.1.1.8.4.1-1.

Table 7.1.1.8.4.1-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 7.1.1.8.4.1-2.

Table 7.1.1.8.4.1-2: Initial conditions for NR SA FR2-FR2 cell re-selection

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.3.2, table E.5-1 and TS 38.508-1 [14] clause 4.3.1.2		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.1.1.8.4.1-3.
2. Message contents are defined in clause 7.1.1.8.4.3.
3. There is two NR carrier and 2 NR Cells specified in the test. Cell 2 is the PCell and Cell 1 is the neighbour cell in a different carrier than cell 2. Cell 1 and Cell 2 are configured according to Annex C.1.2.

Table 7.1.1.8.4.1-3: General test parameters for FR2 inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1.
	Neighbour cell		1, 2	Cell1	
T1 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T1.
	Neighbour cells		1, 2	Cell2	
T3 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3.
	Neighbour cell		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μs	Synchronous cells are assumed.
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTC configuration			1, 2	SMTC.1	SMTC is set with 20ms periodicity on both frequencies.
DRX cycle length		s	1, 2	0.32	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2.
rangeToBestCell			1, 2	Not configured	
highSpeedMeasFlagFR2-r17			1, 2	Set2	Set2 deployment is configured and the UE FR2 scaling factor is considered as N1 = 6.
T1		s	1, 2	10	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	1, 2	70	T3 needs to be defined so that cell re-selection reaction time is taken into account.

7.1.1.8.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one of the NR carriers. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 1.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

2. Set the parameters according to T1 in Table 7.1.1.8.5-1 T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, Cell 1.

4. If the UE responds on lower priority cell, Cell 1 during time duration T1 within 8 seconds from the beginning of time period T1, then count a success for the event “Re-select lower priority Cell 1”. Otherwise count a fail for the event “Re-select lower priority Cell 1”.

5. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 12.

6. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

7. The SS shall switch the power setting from T1 to T2 as specified in Table 7.1.1.8.5-1. T2 starts. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) shall be changed to ensure Cell 2 is not detected by the UE.

8. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 7.1.1.8.5-1.

9. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, Cell 2.

10. If the UE responds on higher priority cell, Cell 2 during time duration T3 within 68 seconds from the beginning of time period T3, then count a success for the event “Re-select higher priority Cell 2”. Otherwise count a fail for the event “Re-select higher priority Cell 2”.

11. If the UE has re-selected Cell 2 within T3, after the re-selection or when T3 expires, continues with step 12. Otherwise, if T3 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and continue with step 12.

12. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

13. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

14. Repeat step 3-12 until a test verdict has been achieved.
    Each of the events “Re-select lower priority Cell 1” and “Re-select higher priority Cell 2” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

7.1.1.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.1.1.8.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.2-1 for NR Cell 1
Default RRC messages and information elements contents exceptions	Table 4.6.3-169 in 38.508-1 [14] with condition R17 HST FR2

Table 7.1.1.8.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	149		
}			

Table 7.1.1.8.4.3-3: *HighSpeedConfigFR2*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-62C			
Information Element	**Value/remark**	**Comment**	**Condition**
HighSpeedConfigFR2-r17 ::= SEQUENCE {			

highSpeedMeasFlagFR2-r17	Set2		
}			

Table 7.1.1.8.4.3-4: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-70	Actual value is -70*2 = -140dBm	7.1.1.8-1 and Cell 1
	-69	Actual value is -69*2+1 = -137dBm	7.1.1.8-2 and Cell 1
	-62	Actual value is -62*2 = -124dBm	7.1.1.8-1 and Cell 2
	-60	Actual value is -60*2 = -120dBm	7.1.1.8-2 and Cell 2
}			
}			

Table 7.1.1.8.4.3-5: SIB2(Cell2)

Derivation Path: Table H.2.2-1 with condition NR Cell 2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	31	Actual value is 31*2 = 62dBm	
threshServingLowP	31	Actual value is 31*2 = 62dBm	
}			
}			

Table 7.1.1.8.4.3-6: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2 with condition NR Cell 1, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-70	Actual value = -70*2 = -140dBm	7.1.1.8-1
	-68	Actual value = -68*2+1 = -137dBm	7.1.1.8-2
threshX-HighP	16	Actual value is 16*2 = 32dBm	
}			
}			
}			

Table 7.1.1.8.4.3-7: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2 with condition NR Cell 2, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-62	Actual value = -62*2 = -124dBm	7.1.1.8-1

	-60	Actual value = -60*2 = -120dBm	7.1.1.8-2
threshX-LowP	9	Actual value = 9*2 = 18dBm	
}			
}			
}			

7.1.1.8.5 Test requirement

Tables 7.1.1.8.4.1-3 and 7.1.1.8.5-1 define the primary level settings including test tolerances for inter frequency NR cell re-selection test case.

Table 7.1.1.8.5-1: Cell specific test parameters for FR2 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1, 2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET parameters		1, 2	CR.3.1 TDD			CR.3.1 TDD		
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD			CCR.3.1 TDD		
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-140			-140		
		2	-137			-137		
Pcompensation	dB	1, 2	0			0		
$Qhyst_s$	dB	1, 2	0			0		
$Qoffset_{s,n}$	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.9.1			Setup 1 defined in A.9.1		
Beam assumption Note 4		1,2	Rough			Rough		
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1	9.95	9.95	7.45	-11.05	infinity	7.95
		2						
N_{oc} Note2	dBm/SCS	1	-93			-93		
		2	-90			-90		
N_{oc} Note2	dBm/15 kHz	1	-102			-102		
		2						
$\hat{E}_s / N_{oc}$	dB	1	10.5+TT	10.5+TT	8+TT	-10.5+TT	infinity	8.5+TT
		2						
SS-RSRP Note3	dBm/SCS	1	-82.5+TT	-82.5+TT	-85+TT	-103.5+TT	infinity	-84.5+TT
		2	-79.5+TT	-79.5+TT	-82+TT	-100.5+TT	infinity	-81.5+TT
Io	dBm/95.04 MHz	1, 2	-53.11+TT	-53.11+TT	-55.34+TT	-63.61+TT	-63.98+TT	-54.91+TT
Treselection	s	1, 2	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2	50			50		
$Thresh_{x, highP}$	dB	1, 2	48			48		
$Thresh_{serving, lowP}$	dB	1, 2	44			44		
$Thresh_{x, lowP}$	dB	1, 2	50			50		

Propagation Condition		1, 2	AWGN	AWGN with 9722 Hz

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

Cell re-selection delay to a higher priority cell = $T_{higher_priority_search} + T_{evaluate,\ NR_\ inter_HST} + T_{SI\text{-}NR}$

$T_{higher_priority_search}$ = 60 s, as specified in TS 38.133 [6] clause 4.2.2.7 of 38.133[6]

$T_{evaluate,\ NR_\ inter_HST}$ = 6 s, as specified in Table 7.1.1.0.2-2a in clause 4.2.2.4 of 38.133[6]

$T_{SI\text{-}NR}$ = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

The cell re-selection delay to a higher priority cell shall be less than a total of 68 seconds in this test case (note: this gives a total of 67.28 seconds but this test allows 68 seconds)

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell test requirement in this case is expressed as:

Cell re-selection delay to a lower priority cell = $T_{evaluate,\ NR_\ inter_HST} + T_{SI\text{-}NR}$,

$T_{evaluate,\ NR_\ inter_HST}$ = 6 s, as specified in Table 7.1.1.0.2-2a in clause 4.2.2.4 of 38.133[6]

$T_{SI\text{-}NR}$ = 1280 ms; maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell is assumed in this test.

The cell re-selection delay to a lower priority cell shall be less than a total of 8 seconds in this test case (note: this gives a total of 7.28 seconds but this test allows 8 seconds)

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

For the test to pass, both events above shall pass.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

7.2 RRC_INACTIVE state mobility

7.2.1 Small Data Transmission

7.2.1.0 Minimum conformance requirements

7.2.1.0.1 Minimum conformance requirements for CG-SDT TA validation

The UE is allowed to transmit using the configured uplink resources provided that the UE is synchronized towards (i.e. using the timing derived using the latest available N_{TA} value as specified in subclause 7.1.2 of TS 38.133 [6]) the serving

cell prior to transmission. If the UE is not able to obtain the synchronization towards the serving cell then the UE shall drop the small data transmission. The UE determines the small data transmission occasion according to the received CG-SDT configuration (see TS 38.331 [13]).

When *cg-SDT-RSRP-ChangeThreshold* (see TS 38.331 [13]) is configured for TA validation based on the RSRP change criterion according to clause 5.8.2 of TS 38.321 [12], the UE is allowed to transmit using CG-SDT using the timing derived using the latest available N_{TA} value as specified in subclause 7.1 of TS 38.133 [6] provided that

- the first RSRP ($RSRP_1$) measurement and the second RSRP ($RSRP_2$) measurements used in the TA validation are valid measurements and,
- timing alignment validation for transmission using CG-SDT is valid according to the validation criteria in clause 5.8.2 of TS 38.321 [12].

$RSRP_1$ and $RSRP_2$ are considered valid provided that the conditions in Table 7.2.1.0.1-1 are met for FR2-1.

Table 7.2.1.0.1-1 Valid measurement for FR2-1

Measurement	FR2-1
$RSRP_1$	(T1 – max(480ms, 8*SMTC periodicity)) ≤ T1' ≤ (T1 + max(480ms, 8*SMTC periodicity))
$RSRP_2$	(T2 – max(480ms, 8*SMTC periodicity)) ≤ T2' ≤ T2

If at least one of $RSRP_1$ and $RSRP_2$ is considered to be invalid based on the above conditions, then the UE shall not validate the CG-SDT using $RSRP_1$ and $RSRP_2$ and shall not transmit using CG-SDT. Additionally, the UE shall not transmit in an CG-SDT occasion that occurs more than 640 ms after T2.

Where:

- T1 is the time when
  - *RRCRelease* with CG-SDT configuration (see TS 38.331 [13]) is received
  - the latest TA is received if TA is received while in RRC_INACTIVE state.
- T1' is the time when the UE has completed $RSRP_1$.
- T2 is the time when the UE performs TA validation as defined in clause 5.27.2 of TS 38.321 [12] for transmission using CG-SDT.
- T2' is the time when the UE has completed $RSRP_2$.
- T_{DRX} is the DRX cycle length in ms.
- M1 is the scaling factor as defined in clause 4.2.2.2 of TS 38.133 [6].

The normative reference for this requirement is TS 38.133 [6] clause 5.5.2 and 5.5.3.

7.2.1.1 TA Validation for CG-SDT in FR2

Editor's note: This test case is incomplete. The following aspects are remaining

- Some parameters in brackets- TT analysis is missing
- Annex F

7.2.1.1.1 Test Purpose

The purpose of this test is to verify that the UE correctly performs TA validation for CG-SDT. This test will partly verify the TA validation requirements in clause 5.5.3 of TS 38.133 [6].

7.2.1.1.2 Test Applicability

This test applies to all types of NR UE from Release 17 onwards that supports transmission of data and/or signalling over allowed radio bearers in RRC_INACTIVE state via configured grant type 1 (i.e., CG-SDT), as specified in TS 38.331 [13].

7.2.1.1.3 Minimum Conformance Requirements

The minimum conformance requirements are specified in clause 7.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.2.1.1.

7.2.1.1.4 Test Description

7.2.1.1.4.1 Initial conditions

This test can be run in the configuration defined in Table 7.2.1.1.4.1-1.

Table 7.2.1.1.4.1-1: Supported test configurations for FR2 PCell

Test Case ID	Test Config Index	Description
7.2.1.1-1	1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Configure the test equipment and the DUT according to the parameters in Table 7.2.1.1.4.1-2.

Table 7.2.1.1.4.1-2: Initial conditions for TA Validation for CG-SDT in FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration from Table 7.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.2.1.1.4.1-3.
2. Message contents are defined in clause 7.2.1.1.4.3.
3. There is only one NR Cell (Cell 1) specified in the test, configured as PCell in FR2. The Cell 1 is configured according to the settings in Annex C.1.1 and C.1.2.

Table 7.2.1.1.4.1-3: General test parameters for TA validation for CG-SDT in FR2

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66
DL initial BWP configuration	Config 1		DLBWP.0.1
UL initial BWP configuration	Config 1		ULBWP.0.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 DD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.X
PDSCH/PDCCH subcarrier spacing	Config 1		120 kHz
PRACH Configuration	Config 1		Table A.3.8.3.4 [6]
OCNG parameters			OP.5
CP length			Normal

Correlation Matrix and Antenna Configuration		2x2 Low
DRX	s	0.64
cg-SDT-RSRP-ThresholdSSB	dBm	-110
cg-SDT-RSRP-ChangeThreshold	dB	[8]
cg-SDT-TimeAlignmentTime		infinity
CG-SDT resource period	ms	320
T1	s	[0.8]
T2	s	[0.96]
T3	s	[3.04]
T4	s	[1.54]
T5	s	[1,76]
T6	s	[4.58]

7.2.1.1.4.2 Test procedure

The test consists of a single cell (Cell 1), which is the active NR cell configured as PCell in FR2 and includes two sub-tests. Sub-test#1 is for testing valid TA where UE can initiate CG-SDT transmission and Sub-test#2 is for testing invalid TA where UE does not initiate CG-SDT transmission. Subtest#2 is only tested if Sub-test#1 is passed. For each sub-test, the DUT is configured with CG-SDT configurations when entering RRC Inactive state. Sub-test#1 consists of four successive time periods, with time duration of T1, T2, T3, and T4 respectively. Sub-test#2 consists of two successive time periods, with time duration of T5 and T6 repectively. Figure 7.2.1.1.4.2-1 shows the variation of the RSRP level in the active cell over the duration of Sub-test#1, and Figure 7.2.1.1.4.2-2 shows the variation of the RSRP level over the duration of Sub-test#2.

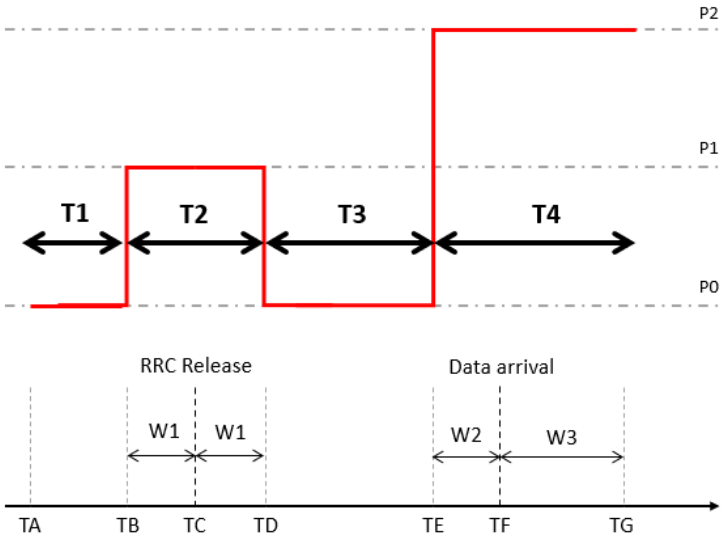

Figure 7.2.1.1.4.2-1: RSRP variation for TA validation for CG-SDT Sub-test#1

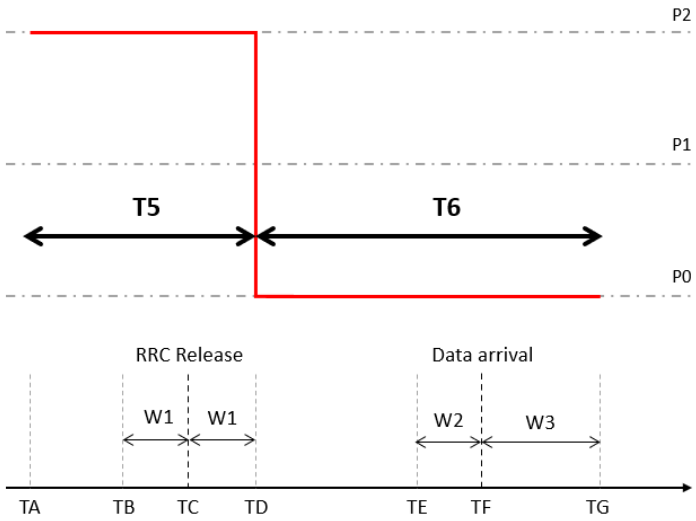

Figure 7.2.1.1.4.2-2: RSRP variation for TA validation for CG-SDT Sub-test#2

The derivation of supplementary timeline events is given in Table 7.2.1.1.4.2-1.

Table 7.2.1.1.4.2-1: Derivation of Supplementary Timeline Events

Time Period	Unit	Test configuration	Value	Derivation
W1	ms	1	480	Test configuration
W2	ms	1	480	Test configuration
W3	ms	1	1060	Test configuration
Subtest#1				
TAtoTB	ms	1	[800]	TAtoTB = T1
TBtoTC	ms	1	480	TBtoTC = W1
TCtoTD	ms	1	480	TCtoTD = W1
TDtoTE	ms	1	[3040]	TDtoTE = T3
TEtoTF	ms	1	480	TEtoTF = W2
TFtoTG	ms	1	1060	TFtoTG = W3
IP PDU Delay (T_delay_modeB)	ms	1	[4000]	Test configuration for step 5 & 16
Subtest#2 (to be used only if Subtest#1 is passed)				
TAtoTB	ms	1	[800]	TAtoTB = T5 – TBtoTC – TCtoTD = T5 – 2*W1
TBtoTC	ms	1	480	TBtoTC = W1
TCtoTD	ms	1	480	TCtoTD = W1
TDtoTE	ms	1	[3040]	TDtoTE = T6 – TEtoTF – TFtoTG = T6 – W2 - W3
TEtoTF	ms	1	480	TEtoTF = W2
TFtoTG	ms	1	1060	TFtoTG = W3
IP PDU Delay (T_delay_modeB)	ms	1	[4000]	Test configuration for step 5 & 16
Note 1: These derivations are useful to understand different timeline events other than T1, T2, T3, T4, T5 and T6. Calculations are informative.				

1. Ensure the UE is fully synchronized to PCell (Cell 1), be registered to the cell and is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (Table 4.5.1-1).

2. Set the parameters according to Table 7.2.1.1.5-1.

3. The test starts at time-point TA before which SS sets the transmit power to P0. Sub-test#1 starts (see Figure 7.2.1.1.4.2-1).

4. At time-point TB, the SS changes the power level from P0 to P1.

5. Between time-points TB and TC, SS sends CLOSE UE TEST LOOP message, containing UE test loop mode B indication and the configuration for T_delay_modeB timer, to the UE.

6. UE closes the test loop mode B and sends CLOSE UE TEST LOOP COMPLETE message to the SS.

7. At time point TC, the SS sends an SDAP PDU and RRCRelease message with CG-SDT configuration to the UE. The UE buffers the received SDAP SDU (IP PDU), starts T_delay_modeB timer and enters RRC_INACTIVE state.

8. At time-point TD, the SS changes the power level from P1 to P0.

9. At time-point TE, the SS changes the power level from P0 to P2.

10. At time-point TF, the T_delay_modeB timer expires which trigger UL data arrival at UE lower layer.

11. After time point TF, SS observes whether UE transmits with CG-SDT no later than TG.

12. Check 1: If UE transmits an RRCResumeRequest and the looped back SDAP SDU in a CG PUSCH occasion occurring anywhere from time-points TF to TG, declare Sub-test#1 as passed.

13. If Sub-test#1 is passed in Step 12, go to Step 14 else declare the test iteration verdict as ‘FAIL’ and go to Step 26. Sub-test#1 ends.

14. After time point TG, SS initiates the generic procedure given in Table 4.5.4.2-3 (Steps 1-8) of TS 38.508-1 [14] and brings the UE from RRC INACTIVE to RRC CONNECTED state.

15. SS sends OPEN UE TEST LOOP message to the UE.

16. UE sends OPEN UE TEST LOOP COMPLETE message to the SS.

17. Sub-test#2 starts; SS sets the transmit power to P2 (see Figure 7.2.1.1.4.2-2) and this time is considered as time-point TA for Sub-test#2. From time-point TA to time-point TD, power level is fixed at P2.

18. Between the time-points TB and TC of Sub-test#2, SS sends CLOSE UE TEST LOOP message, containing UE test loop mode B indication and the configuration for T_delay_modeB timer, to the UE.

19. UE closes the test loop mode B and sends CLOSE UE TEST LOOP COMPLETE message to the SS.

20. At time-point TC, the SS sends an SDAP PDU and RRCRelease message with CG-SDT configuration to UE. The UE buffers the received SDAP SDU (IP PDU), starts T_delay_modeB timer and enters in RRC_INACTIVE state.

21. At time-point TD, the SS changes the power level from P2 to P0.

22. At time-point TF, the T_delay_modeB timer expires which trigger UL data arrival at UE lower layer.

23. After time point TF, SS observes whether UE transmits with CG-SDT no later than TG.

24. Check 2: If UE transmits an RRCResumeRequest and the looped back SDAP SDU in a CG PUSCH occasion occurring anywhere from time-points TF to TG, Sub-test#2 is failed else Sub-test#2 is passed. Sub-test#2 ends.

25. If Sub-test#2 is passed, declare the test iteration verdict as ‘PASS’ else ‘FAIL’.

26. After time point TG, SS initiates the generic procedure given in Table 4.5.4.2-3 (Steps 1-8) of TS 38.508-1 [14] and brings the UE from RRC INACTIVE to RRC CONNECTED state.

27. SS sends OPEN UE TEST LOOP message to the UE.

28. UE opens the test loop and sends OPEN UE TEST LOOP COMPLETE message to the SS.

29. Repeat steps 1-28 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.2.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 7.2.1.1.4.3-1: *SIB1* (All steps, clause 7.2.1.1.4.2)

Derivation Path: TS 38.508-1 [4] table 4.6.1-28			
Information Element	**Value/Remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
sdt-ConfigCommon-r17 SEQUENCE {			
sdt-RSRP-Threshold-r17	Not present		
sdt-LogicalChannelSR-DelayTimer-r17	sf512		
sdt-DataVolumeThreshold-r17	byte100		
t319a-r17	ms4000		
}			
}			
}			
}			
}			

Table 7.2.1.1.4.3-2: CLOSE UE TEST LOOP (Step 5 and 16, clause 7.2.1.1.4.2)

Derivation path: 38.508-1 [4] Table 4.7A-3 condition UE test loop mode B		
Information Element	**Value/remark**	**Comment**
UE test loop mode B_Enhanced LB setup		
IP PDU delay	0 0 0 0 0 1 0 0	T_delay_modeB duration in seconds (4 seconds)

Table 7.2.1.1.4.3-3: *RRCRelease* (Steps 5 and 16, clause 7.2.1.1.4.2)

Derivation Path: TS 38.508-1 [4], Table 4.6.1-16 with condition NR_RRC_INACTIVE and SDT			
Information Element	**Value/Remark**	**Comment**	**Condition**
RRCRelease ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcRelease SEQUENCE {			
suspendConfig SEQUENCE {			
sdt-Config-r17 CHOICE {			
setup SEQUENCE {			
sdt-MAC-PHY-CG-Config-r17 CHOICE {			
setup SEQUENCE {			
cg-SDT-ConfigInitialBWP-NUL-r17 CHOICE {			
setup SEQUENCE {			
pusch-Config-r17 CHOICE {			
setup	PUSCH-Config	Derivation Path: TS 38.508-1 [4], Table 4.6.3-118	
}			
configuredGrantConfigToAddModList-r17 SEQUENCE (SIZE (1..maxNrofConfiguredGrantConfig-r16)) OF ConfiguredGrantConfig {			
ConfiguredGrantConfig	ConfiguredGrantConfig	Table 7.2.1.1.4.3-4	
}			
}			
}			
cg-SDT-ConfigInitialBWP-DL-r17 CHOICE {			
setup SEQUENCE {			
pdcch-Config-r17 CHOICE {			
setup	PDCCH-Config	Derivation Path: TS 38.508-1 [4], Table 4.6.3-95	
}			
pdsch-Config-r17 CHOICE {			

setup	PDSCH-Config	Derivation Path: TS 38.508-1 [4], Table 4.6.3-100	
}			
}			
}			
cg-SDT-TimeAlignmentTimer-r17	infinity	Time Alignment Timer value	
cg-SDT-RSRP-ThresholdSSB-r17	46	(IE value – 156) dBm = - 110 dBm	
cg-SDT-TA-ValiditationConfig-r17 CHOICE {			
setup SEQUENCE {			
cg-SDT-RSRP-ChangeThreshold-r17	[dB8]	[8] dB	
}			
}			
cg-SDT-CS-RNTI-r17	Not present		
}			
}			
}			
}			
}			
}			
}			

Table 7.2.1.1.4.3-4: *ConfiguredGrantConfig* (Table 7.2.1.1.4.3-3)

Derivation Path: TS 38.508-1 [4] Table 4.6.3-26, condition CG_Config_Type1			
Information Element	**Value/Remark**	**Comment**	**Condition**
ConfiguredGrantConfig ::= SEQUENCE {			
periodicity	Sym2560x14	320ms	SCS120
rrc-ConfiguredUplinkGrant SEQUENCE{			
frequencyDomainAllocation	BIT STRING (SIZE(18)	Equals to NBWPsize * (NBWPsize – LRB + 1) + (NBWPsize -1 - RBstart), where LRB = 24 PRB, RBstart = 0, NBWPsize is the size [PRBs] of the carrier bandwidth and contained in TS.38.508-1 [4] clause 6.2.3.1	SCS15 AND CBW5, SCS30 AND CBW10
	BIT STRING (SIZE(18)	Equal to NBWPsize * (LRB-1) + RBstart), where LRB = 24 PRB, RBstart = 0, NBWPsize is the size [PRBs] of the carrier bandwidth and contained in TS.38.508-1 [4] clause 6.2.3.1	
dmrs-SeqInitialization	0		
mcsAndTBS	0		
}			
}			
Note : Configured UL grant for CG-SDT is 888 bits (L_{RBs} & I_{MCS} as per 38.523-3[3] annex B) is chosen to enable UE to transmit RRCResumeRequest and Loop backed RLC PDU in a MAC PDU (97 bytes for Loop backed RLC PDU + 2 bytes for MAC Sub Header + 6 bytes for RRCResumeRequest message + 2 bytes for MAC Sub Header + 4 bytes for BSR and Padding)			

Table 7.2.1.1.4.3-5: *RRCResumeRequest* (Steps 10 and 20, clause 7.2.1.1.4.2)

Derivation Path: TS 38.508-1 [4], Table 4.6.1-19			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCResumeRequest ::= SEQUENCE {			

rrcResumeRequest SEQUENCE {			
resumeCause	mo-data		
}			
}			

7.2.1.1.5 Test Requirements

Tables 7.2.1.1.4.1-3 and 7.2.1.1.5-1 define the general parameters and cell specific parameters for NR SA FR2 CG-SDT TA validation test.

Table 7.2.1.1.5-1: Cell specific test parameters TA validation for CG-SDT in FR2

Parameter		Unit	Test 1					
			T1	T2	T3	T4	T5	T6
AoA setup			Setup 1 defined in A.3.15					
Assumption for UE beams Note 4			Rough					
EPRE ratio of PDCCH DMRS to SSS		dB	4					
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
N_{oc}	Config 1	dBm/15kHz	-100 + TT					
N_{oc}	Config 1	dBm/SCS	-100 + TT					
$\hat{E}_s / I_{ot}$	Config 1	dB	[0] + TT	[13] + TT	[0] + TT	[24.5] + TT	[24.5] + TT	[0] + TT
$\hat{E}_s / N_{oc}$	Config 1	dB	[0] + TT	[13] + TT	[0] + TT	[24.5] + TT	[24.5] + TT	[0] + TT
SS-RSRP	Config 1	dBm/SCS	[-100] + TT	[-87] + TT	[-100] + TT	[-75.5] + TT	[-75.5] + TT	[-100] + TT
Io	Config 1	dBm/95.04 MHz	[-68] + TT	[-57.8] + TT	[-68] + TT	[-46.50] + TT	[-46.50] + TT	[-68] + TT
Propagation condition			AWGN					

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

The UE behaviour in each test during time durations shall be as follows:

During Sub-test#1, UE shall transmit UL data with CG-SDT within 1060ms after time point TF.

During Sub-test#2, after passing Sub-test#1, UE shall not transmit UL data with CG-SDT.

The rate of correct events observed during repeated tests shall be at least 90%.

7.3 RRC_CONNECTED state mobility

7.3.1 Handover

7.3.1.0 Minimum conformance requirements

7.3.1.0.1 Minimum conformance requirements for NR FR2 – NR FR2 handover

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ ms from the end of the last TTI containing the RRC command:

$$D_{handover} = T_{RRC_procedure_delay} + T_{interruption}$$

Where:

$D_{handover}$ equals the maximum RRC procedure delay to be defined in clause 12 in TS 38.331 [13] plus the interruption time stated in clause 6.1.1.4.2 of 38.133 [6].

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then T_{search} = 0 ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = N* T_{rs} ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = N*3* T_{rs} ms. N = 8 when the target cell is in FR2-1, and N = 12 when the target cell is in FR2-2. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = T_{rs} for both known and unknown target cell.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [8].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If such measObjectNRs configured by MN and SN have different SMTC, Trs is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [13] signalling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In FR2, the target cell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the handover command:
  - the UE has sent a valid measurement report for the target cell and
  - One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in clause 9.3 of 38.133 [6],
- One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in clause 9.3 of 38.133 [6].

otherwise it is unknown.

The normative reference for this requirement is TS 38.133 [6] clause 6.1.1.4.

7.3.1.0.2 Minimum conformance requirements for NR FR1 – NR FR2 handover

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ ms from the end of the last TTI containing the RRC command:

$$D_{handover} = T_{RRC_procedure_delay} + T_{interruption}$$

Where:

$D_{handover}$ equals the maximum RRC procedure delay to be defined in clause 12 in TS 38.331 [13] plus the interruption time stated in clause 6.1.1.5.2 of 38.133 [6].

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When in inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then T_{search} = 0 ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = N*3* T_{rs} ms. N = 8 when the target cell is in FR2-1, and N = 12 when the target cell is in FR2-2. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up 40ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = T_{rs} for both known and unknown target cell.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [8].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If such measObjectNRs configured by MN and SN have different SMTC, Trs is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

In FR2, the target cell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the handover command:
  - the UE has sent a valid measurement report for the target cell and
  - One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in clause 9.3 of 38.133 [6],
- One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in clause 9.3 of 38.133 [6].

otherwise it is unknown.

The normative reference for this requirement is TS 38.133 [6] clause 6.1.1.5.

7.3.1.0.3 Minimum conformance requirements for NR FR1 – NR FR2 DAPS handover

An FR1-FR2 DAPS handover is synchronous if it meets the conditions in table 7.3.1.0.3-1, otherwise it is asynchronous

Table 7.3.1.0.3-1: Sync condition for FR1-FR2 DAPS handover

Frequency Range of the pair of carriers	Maximum receive timing difference between source and target cell (μs) for sync DAPS handover	Maximum transmit timing difference between source and target cell (μs)Note 1 sync DAPS handover
Between FR1 and FR2	25	26.1

Procedure delays for the procedure that can command a DAPS handover are specified in TS 38.331 [13].

When the UE receives a RRC message implying handover, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover1}$ ms from the end of the last TTI containing the RRC command when UE is configured with dual active protocol stack handover.

$$D_{handover1} = T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

$T_{RRC_procedure}$ is the maximum RRC procedure delay as specified in clause 12 in TS 38.331 [13].

T_{search}, T_{IU}, $T_{processing}$, T_{Δ} and T_{margin} are defined in clause 6.1.1.5.2 of 38.133 [6].

After successful RACH procedure of the target cell, when the UE receives an RRC message implying source cell release command, the UE shall accomplish the release actions specified in TS 38.331 [13] within $D_{handover2}$.

$$D_{handover2} = T_{RRC_procedure} + T_{interrupt2}$$

Where:

$T_{RRC_procedure}$ is the RRC procedure delay as specified in clause 12 in TS 38.331 [13].

$T_{interrupt2}$ is defined in clause 6.1.3.4.2 of 38.133 [6].

During $D_{handover1}$, the UE is allowed an interruption of up to $T_{interrupt1}$ on source cell.

For FR1-to-FR2 inter-band handover, $T_{interrupt1}$ is specified in Table 7.3.1.0.3-2.

Table 7.3.1.0.3-2: $T_{interrupt1}$ for FR1-to-FR2 inter-band DAPS HO

μ	NR slot length (ms) of source cell	$T_{interrupt1}$ (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	5

During $D_{handover2}$, the UE is allowed an interruption of up to $T_{interrupt2}$ on target cell.

For FR1-to-FR2 inter-band handover, $T_{interrupt2}$ is specified in Table 7.3.1.0.3-3.

Table 7.3.1.0.3-3: $T_{interrupt2}$ for FR1-to-FR2 inter-band DAPS HO

μ	NR slot length (ms) of target cell	$T_{interrupt2}$ (slots)	
		Sync	Async
2	0.25	5	5
3	0.125	9	9

The normative reference for this requirement is TS 38.133 [6] clause 6.1.3.4.

7.3.1.1 NR SA FR1-FR2 Inter-frequency handover; unknown target cell

Editor's Note:

- This test case is incomplete since FR1-FR2 OTA testability is still FFS.
- Test Tolerances are missing
- Connection diagram may require updates for FR1+FR2 scenarios

7.3.1.1.1 Test purpose

To verify the requirement for the NR FR1-NR FR2 inter frequency handover requirements specified in 38.133 [6] clause 6.1.1.5.

7.3.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 and onwards supporting SA FR1 and SA FR2.

7.3.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.1.1.

7.3.1.1.4 Test description

7.3.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.1.1.4.1-1.

Table 7.3.1.1.4.1-1: NR SA FR1-FR2 Test configurations for Inter-frequency handover

Config	Description
7.3.1.1-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.3.1.1-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.3.1.1-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.3.1.1.4.1-2

Table 7.3.1.1.4.1-2: NR SA FR1-FR2 Initial conditions for Inter-frequency handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	[A.3.3.3.1-1]	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.1.1.4.3.

2. The power levels and settings for NR FR1 Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Table 7.3.1.1.4.1-3.

Table 7.3.1.1.4.1-3: NR SA FR1-FR2 General test parameters for Inter-frequency handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

7.3.1.1.4.2 Test procedure

The test scenario comprises of two NR carriers each with one cell. NR Cell 1 is the source PCell on a FR1 carrier and NR Cell 2 is the target PCell on a FR2 carrier. General parameters for Cell 1 and Cell 2 are given in Table 7.3.1.1.4.1-3 and Table 7.3.1.1.5-1 respectively. No gap patterns are configured in the test case.

The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

The test sequence shall be carried out in RRC_CONNECTED for every test case. Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 7.3.1.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message implying handover to Cell 2.

4. The start of T2 is the instant when the last TTI containing the *RRCReconfiguration* message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 7.3.1.1.5-1. T2 starts.

5. If the UE transmits the uplink PRACH channel to Cell 2 less than 572 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

6. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off and then on the UE) or switch off and then on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.3.1.1.4.3-1: NR SA FR1-FR2 Common exception messages for Inter-frequency handover

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.2-2 with Condition RBConfig_KeyChange

7.3.1.1.5 Test requirements

Table 7.3.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.1.1.5-1: NR SA FR1-FR2 Cell specific test parameters for Inter-frequency handover

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]			N/A		Rough	
AoA setup			NA		Setup 1 as defined in A.9	
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD		TDD	
	Config 2,3		TDD		TDD	
TDD configuration	Config 1		Not Applicable		TDDConf.3.1	
	Config 2		TDDConf.1.1		TDDConf.3.1	
	Config 3		TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
	Config 2		10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
	Config 3		40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
	Config 2		10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
	Config 3		40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
Data RBs allocated	Config 1		52		66	
	Config 2		52		66	
	Config 3		106		66	
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		SR.3.1 TDD	
	Config 2		SR.1.1 TDD		SR.3.1 TDD	
	Config 3		SR.2.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD		CR.3.1 TDD	
	Config 2		CR.1.1 TDD		CR.3.1 TDD	
	Config 3		CR.2.1 TDD		CR.3.1 TDD	
Control Channel RMC	Config 1		CCR.1.1 FDD		CCR.3.1 TDD	
	Config 2		CCR.1.1 TDD		CCR.3.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.3.1 TDD	
OCNG Patterns			OP.1			
SSB configuration	Config 1,2		SSB.1 FR1		SSB.3 FR2	
	Config 3		SSB.2 FR1		SSB.3 FR2	
SMTC configuration	Config 1,2		SMTC.1		SMTC.1	
	Config 3		SMTC.2		SMTC.1	
SMTC configuration	Config 1,2		SMTC.1		SMTC.1	
	Config 3		SMTC.2		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz		120 kHz	
	Config 3		30 kHz		120 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz		120 kHz	
	Config 3		30 kHz		120 kHz	
PRACH configuration			PRACH.1 FR1		PRACH.1 FR2	
TRS configuration	Config 1		TRS.1.1 FDD		TRS.2.1 TDD	
	Config 2		TRS.1.1 TDD		TRS.2.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.2.1 TDD	
PDSCH/PDCCH TCI state			N/A		TCI.State.2	
BWP configuration	Initial DL BWP		DLBWP.0.1		DLBWP.0.1	

	Dedicated DL BWP		DLBWP.1.1	DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15kHz	Link only, see clause A.6A	-104.7+TT	
N_{oc} Note2	Config 1,2	dBm/SCS		-95.7+TT	
	Config 3			-95.7+TT	
$\hat{E}_s / I_{ot}$		dB		-Infinity	10+TT
$\hat{E}_s / N_{oc}$		dB		-Infinity	10+TT
Io Note3	Config 1,2	dBm/ BW		-66.7+TT	-56.3+TT
	Config 3	dBm/ BW		-66.7+TT	-56.3+TT
Propagation condition		-		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall start to transmit the PRACH to Cell 2 less than 572 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 562 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.5.2 of 38.133 [6].

This gives a total of 572 ms.

7.3.1.2 NR SA FR2 Intra-frequency handover; unknown target cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.3.1.2.1 Test purpose

To verify the requirement for the NR FR2 intra frequency handover requirements specified in 38.133 [6] clause 6.1.1.4.

7.3.1.2.2 Test applicability

This test applies to all types of NR UE from Release 15 and onwards supporting SA FR2.

7.3.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.1.2.

7.3.1.2.4 Test description

7.3.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.1.2.4.1-1.

Table 7.3.1.2.4.1-1: NR SA FR2 Test configurations for Intra-frequency handover

Config	Description
7.3.1.2-1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.3.1.2.4.1-2

Table 7.3.1.2.4.1-2: NR SA FR2 Initial conditions for Intra-frequency handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.1.2.4.3.
2. The power levels and settings for NR FR2 Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.3.1.2.4.1-3.

Table 7.3.1.2.4.1-3: NR SA FR2 General test parameters for Intra-frequency handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

7.3.1.2.4.2 Test procedure

The test scenario comprises of one FR2 RF channel with two intra-frequency NR cells. NR Cell 1 is the source PCell and NR Cell 2 is the target Pcell. General parameters for Cell 1 and Cell 2 are given in Table 7.3.1.2.4.1-3 and Table 7.3.1.2.5-1 respectively. No gap patterns are configured in the test case.

The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

The test sequence shall be carried out in RRC_CONNECTED for every test case. Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 7.3.1.2.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message implying handover to Cell 2.

4. The start of T2 is the instant when the last TTI containing the *RRCReconfiguration* message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 7.3.1.2.5-1. T2 starts.

5. If the UE transmits the uplink PRACH channel to Cell 2 less than 232 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

6. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.

7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off and then on the UE) or switch off and then on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.3.1.2.4.3-1: NR SA FR2 Common exception messages for Intra-frequency handover

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.2-2 with Condition RBConfig_KeyChange

7.3.1.2.5 Test requirements

Table 7.3.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.1.2.5-1: NR SA FR2 Cell specific test parameters for Intra-frequency handover

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Assumption for UE beams[Note 6]		Rough		Rough	

AoA setup			Setup 1 as defined in A.9			
NR RF Channel Number			**1**		**1**	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR.3.1 TDD			
RMSI CORESET Reference Channel			CR.3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB.3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			PRACH.1 FR2			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7			
N_{oc} Note2		dBm/SCS	-95.7			
$\hat{E}_s / I_{ot}$		dB	6	-1.8	-Infinity	0
$\hat{E}_s / N_{oc}$		dB	6	6	-Infinity	7
Io Note3		dBm/ BW	-59.7	-56.7	-59.7	-56.7
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall start to transmit the PRACH to Cell 2 less than 232 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 222 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.4.2 of 38.133 [6].

This gives a total of 232 ms.

7.3.1.3 NR SA FR2-FR2 Inter-frequency handover; unknown target cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.3.1.3.1 Test purpose

To verify the requirement for the NR FR2-NR FR2 inter frequency handover requirements specified in 38.133 [6] clause 6.1.1.4.

7.3.1.3.2 Test applicability

This test applies to all types of NR UE from Release 15 and onwards supporting SA FR2.

7.3.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.1.3.

7.3.1.3.4 Test description

7.3.1.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.1.3.4.1-1.

Table 7.3.1.3.4.1-1: NR SA FR2-FR2 Test configurations for Inter-frequency handover

Config	Description
7.3.1.3-1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.3.1.3.4.1-2

Table 7.3.1.3.4.1-2: NR SA FR2-FR2 Initial conditions for Inter-frequency handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.1.3.4.3.

2. The power levels and settings for NR FR2 Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Table 7.3.1.3.4.1-3.

Table 7.3.1.3.4.1-3: NR SA FR2-FR2 General test parameters for Inter-frequency handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

7.3.1.3.4.2 Test procedure

The test scenario comprises of two NR carriers each with one cell. NR Cell 1 is the source PCell on one FR2 carrier and NR Cell 2 is the target PCell on another FR2 carrier. General parameters for Cell 1 and Cell 2 are given in Table 7.3.1.3.4.1-3 and Table 7.3.1.3.5-1 respectively. No gap patterns are configured in the test case.

The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

The test sequence shall be carried out in RRC_CONNECTED for every test case. Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 7.3.1.3.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message implying handover to Cell 2.

4. The start of T2 is the instant when the last TTI containing the *RRCReconfiguration* message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 7.3.1.3.5-1. T2 starts.

5. If the UE transmits the uplink PRACH channel to Cell 2 less than 552 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

6. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.

7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off and then on the UE) or switch off and then on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.3.1.3.4.3-1: NR SA FR2-FR2 Common exception messages for Inter-frequency handover

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.2-2 with Condition RBConfig_KeyChange

7.3.1.3.5 Test requirements

Table 7.3.1.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.1.3.5-1: NR SA FR2-FR2 Cell specific test parameters for Inter-frequency handover

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]			Rough		Rough	
AoA setup			Setup 1 as defined in A.9			
NR RF Channel Number			1		2	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR.3.1 TDD			
RMSI CORESET Reference Channel			CR.3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB.3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			PRACH.1 FR2			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7		-104.7	
N_{oc} Note2		dBm/SCS	-95.7		-95.7	
$\hat{E}_s / I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	5	5	-Infinity	5
Io[Note3]	Config 1,2	dBm/BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 6: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall start to transmit the PRACH to Cell 2 less than 552 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 542 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.4.2 of 38.133 [6].

This gives a total of 552 ms.

7.3.1.4 NR SA FR1-FR2 synchronous DAPS handover

Editor's Note:

- This test case is incomplete since FR1-FR2 OTA testability is still FFS.
- MU and TT analysis is complete for UE PC3 and test frequency f ≤ 40.8 GHz.
- MU and TT analysis is incomplete for test frequency f > 40.8 GHz
- Connection diagram may require updates for FR1+FR2 scenarios

MU and TT analysis is incomplete for UE power class other than PC37.3.1.4.1 Test purpose

To verify the requirement for the NR FR1-NR FR2 inter-band inter-frequency synchronous DAPS handover requirements in synchronous scenario specified in 38.133 [6] clause 6.1.3.4.

7.3.1.4.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and support inter-frequency DAPS handover.

7.3.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.1.4.

7.3.1.4.4 Test description

7.3.1.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.1.4.4.1-1.

Table 7.3.1.4.4.1-1: NR SA FR1-FR2 synchronous DAPS handover test configurations

Config	Description
7.3.1.4-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.3.1.4-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.3.1.4-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.3.1.4.4.1-2

Table 7.3.1.4.4.1-2: Initial conditions for NR SA FR1-FR2 synchronous DAPS handover

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.

Test frequencies	As specified in Annex E.1.1, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.1.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	[A.3.3.3.1-1]	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.1.4.4.3.
2. The power levels and settings for NR FR1 Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.3.1.4.4.1-3 below, with A4-Threshold modified by Test Tolerance.

Table 7.3.1.4.4.1-3: General test parameters for NR SA FR1-FR2 synchronous DAPS handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A4-Threshold		dBm	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells		µs	33	Synchronous cells
T1		s	5	
T2		s	<5	
T3		s	<0.5	
T4		ms	$10+T_{interrupt2}$	$T_{interrupt2}$ as defined in 38.133 [6] Table 6.1.3.4.2-2 for synchronous DAPS HO
T5		ms	100	

7.3.1.4.4.2 Test procedure

The test scenario comprises of two NR carriers each with one cell. NR Cell 1 is the source PCell on a FR1 carrier and NR Cell 2 is the target PCell on a FR2 carrier. General parameters for Cell 1 and Cell 2 are given in Table 7.3.1.4.4.1-3 and Table 7.3.1.4.4.1-4 respectively.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to the Cell 1 and not aware of the Cell 2. During T1, the UE does not have any timing information of the Cell 2.

Before the start of T2, the UE is configured with event A4 triggered measurement reporting on target carrier and measurement gaps (gap pattern ID # 0). From start of T2, the Cell 2 becomes detectable. The UE performs cell detection and measurements on the Cell 2 and shall send event report to the network. After receiving the event report A4, the network sends a RRC message implying DAPS handover command for target cell addition to the UE.

T3 starts from the instant when the test system receives the ACK of the PDSCH corresponding to the last TTI containing DAPS handover command for target cell addition sent to the UE. During T3, UE shall be able to perform random access, DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perform DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. After successful RACH procedure on the Cell 2, UE is scheduled with PDSCH from Cell 1 and Cell 2 in alternative TTIs. In the end of T3 the network sends a RRC message implying DAPS handover command for source cell release to the UE. During T3, the handover delay $D_{handover1}$ for target cell addition need to be verified.

T4 starts from the instant when the test system receives the ACK of the PDSCH corresponding to the last TTI containing DAPS handover command for source cell release sent to the UE. During T4, the UE shall accomplish the release actions within $D_{handover2}$

From start of T5, the UE shall stop sending periodical CSI report on Cell 1.

The test sequence shall be carried out in RRC_CONNECTED for every test case. Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 7.3.1.4.5-1 and Table 7.3.1.4.5-2 respectively. Propagation conditions are set according to Annex C clause C.2.2. T1 starts and the SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message to configure event A4 triggered measurement reporting on the inter-frequency carrier and periodical CSI reporting on Cell 1.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.3.1.4.5-1 and Table 7.3.1.4.5-2 respectively.

7. UE shall transmit a *MeasurementReport* message triggered by Event A4.

8. SS shall transmit an *RRCReconfiguration* with *reconfigurationWithSync* message which reconfiguring DRB as a DAPS radio bearer to the UE, at that instant the SS receives the ACK of the PDSCH corresponding to the *RRCReconfiguration* with *reconfigurationWithSync* message the SS shall switch the power settings from T2 to T3 as specified in Table 7.3.1.4.5-1 and Table 7.3.1.4.5-2. T3 starts and the SS stops scheduling the UE to perform DL reception on Cell 1.

9. If the UE transmits PRACH preamble to Cell 2 within $D_{handover1}$ from the beginning of time period T3 then the number of successful tests is increased by one, continue to step 10. Otherwise, the number of failure tests is increased by one, go to step 17. where:

   - $D_{handover1}$ = 92 ms.

10. The UE transmits an *RRCReconfigurationComplete* message on Cell 2.

11. Upon receiving *RRCReconfigurationComplete* message sent by UE, the SS immediately starts scheduling UE to perform DL reception in Cell 1 and Cell 2 in an alternative manner, and monitoring corresponding ACK/NACK feedbacks sent by the UE.

12. Upon T3 expiring, the SS immediately transmit an *RRCReconfiguration* with *daps-SourceRelease-r16 = true* on Cell 2 to the UE. T4 starts when the SS receives the ACK of the PDSCH corresponding to the *RRCReconfiguration* with *daps-SourceRelease-r16 = true*.

13. The UE transmits an *RRCReconfigurationComplete* message on Cell 2.

14. When T4 expires, T5 starts.

15. If

    a) The UE can report ACK/NACK from the first DL reception scheduled on Cell 2 after the beginning of time period T5,

    and

    b) The UE doesn't send periodical CSI report during entire time period T5.

then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

16. After T5 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

17. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

18. Repeat steps 2-17 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.3.1.4.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 7.3.1.4.4.3-3	
nonCriticalExtension SEQUENCE {			
masterCellGroup SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 7.3.1.4.4.3-2	
}			
}			
}			
}			
}			

Table 7.3.1.4.4.3-2: ServingCellConfig (Table 7.3.1.4.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM Specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 7.3.1.4.4.3-3: MeasConfig (Table 7.3.1.4.4.3-1)

Derivation path: Table H.3.1-2 with condition INTER-FREQ			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfig[1] CHOICE {			
reportConfigNR	ReportConfigNR(-120) specified in Table H.3.1-4AA	Acutal value of A4-threshold is -120dBm	
}			
}			
}			

Table 7.3.1.4.4.3-4: MeasurementReport (Step 7)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-5A

Information Element	Value/remark	Comment	Condition
MeasurementReport ::= SEQUENCE {			
criticalExtensions CHOICE {			
measurementReport SEQUENCE {			
measResults	MeasResults specified in Table H.3.1-7 with condition INTER-FREQ		
}			
}			
}			

Table 7.3.1.4.4.3-5: RRCReconfiguration (Step 8)

Derivation Path: TS 38.508-1 [4], Table 4.8.1-1A with Condition RBConfig_NoKeyChange			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
radioBearerConfig	RadioBearerConfig	Table 7.3.1.4.4.3-6	
nonCriticalExtension SEQUENCE{			
masterCellGroup	CellGroupConfig	Table 7.3.1.4.4.3-7	
}			
}			
}			
}			

Table 7.3.1.4.4.3-6: RadioBearerConfig (Table 7.3.1.4.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-132 with condition DRB1			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioBearerConfig ::= SEQUENCE {			
drb-ToAddModList SEQUENCE (SIZE (1..maxDRB)) OF DRB-ToAddMod {	1 entry		
DRB-ToAddMod[1] SEQUENCE {		entry 1	
drb-Identity	DRB-Identity using condition DRBn	DRB #n is a DRB established before DAPS HO. Actual value of n is left to TE implementation	
daps-Config-r16	true		
}			
}			
securityConfig	Not present		
}			

Table 7.3.1.4.4.3-7: CellGroupConfig (Table 7.3.1.4.4.3-6)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition PCell_change			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
rlc-BearerToAddModList	Not present		
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			
spCellConfigCommon SEQUENCE {			
physCellId	PhysCellId for Cell 2		
}			
}			
}			
}			

Table 7.3.1.4.4.3-8: RRCReconfiguration (Step 12)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition DAPS_HO_ReleaseSource

7.3.1.4.5 Test requirements

Table 7.3.1.4.5-1 and Table 7.3.1.4.5-2 defines the primary level settings including test tolerances for all tests.

Table 7.3.1.4.5-1: Cell specific test parameters for NR SA FR1-FR2 synchronous DAPS handover (Cell 1 in FR1)

Parameter		Unit	Cell 1				
			T1	T2	T3	T4	T5
NR RF Channel Number			1				
Duplex mode	Config 1		FDD				
	Config 2,3		TDD				
TDD configuration	Config 1		Not Applicable				
	Config 2		TDDConf.1.1				
	Config 3		TDDConf.2.1				
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52				
	Config 2		10: $N_{RB,c}$ = 52				
	Config 3		40: $N_{RB,c}$ = 106				
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52				
	Config 2		10: $N_{RB,c}$ = 52				
	Config 3		40: $N_{RB,c}$ = 106				
TRS configuration	Config 1		TRS.1.1 FDD				
	Config 2		TRS.1.1 TDD				
	Config 3		TRS.1.2 TDD				
DRx Cycle		ms	Not Applicable				
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD				
	Config 2		SR.1.1 TDD				
	Config 3		SR2.1 TDD				
CORESET Reference Channel	Config 1		CR.1.1 FDD				
	Config 2		CR.1.1 TDD				
	Config 3		CR2.1 TDD				
OCNG Patterns			OP.1				
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD				
	Config 2		CSI-RS.1.1 TDD				
	Config 3		CSI-RS.2.1 TDD				
reportConfigType			periodic				
reportQuantity			cri-RI-PMI-CQI				
CSI reporting periodicity	Config 1,2	slot	5				
	Config 3		10				
CSI reporting offset	Config 1,2	slot	3				
	Config 3		5				
SSB Configuration	Config 1,2		SSB.1 FR1				
	Config 3		SSB.2 FR1				
SMTC Configuration	Config 1,2		SMTC.1				
	Config 3		SMTC.2				
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz				
	Config 3		30 kHz				
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz				
	Config 3		30 kHz				
PRACH configuration			FR1 PRACH configuration 2				
BWP	Initial DL BWP		DLBWP.0.1				
	Dedicated DL BWP		DLBWP.1.3				
	Initial UL BWP		ULBWP.0.1				
	Dedicated UL BWP		ULBWP.1.3				
EPRE ratio of PSS to SSS		dB	0				

EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	NA Link only, see clause A.3.7A
N_{oc} Note2	Config 1,2	dBm/SCS	
	Config 3		
$\hat{E}_s / I_{ot}$		dB	
$\hat{E}_s / N_{oc}$		dB	
Io Note3	Config 1,2	dBm/ 9.36MHz	
	Config 3	dBm/ 38.16MHz	
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 7.3.1.4.5-2: Cell specific test parameters for NR SA FR1-FR2 synchronous DAPS handover (Cell 2 in FR2)

Parameter		Unit	Cell 2	
			T1	T2 - T5
Assumption for UE beams Note 6			Rough	
AoA setup			Setup 1 as defined in A.9	
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		TDD	
TDD configuration	Config 1,2,3		TDDConf.3.1	
$BW_{channel}$	Config 1,2,3	MHz	100: $N_{RB,c}$ = 66	
BWP BW	Config 1,2,3	MHz	100: $N_{RB,c}$ = 66	
TRS configuration	Config 1,2,3		TRS.2.1 TDD	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR3.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR3.1 TDD	
OCNG Patterns			OCNG pattern 1	
SSB Configuration	Config 1,2,3		SSB.1 FR2	
CSI-RS configuration for CSI reporting	Config 1,2,3		CSI-RS.3.1 TDD	
SMTC Configuration			SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	
PRACH configuration			FR2 PRACH configuration 2	
TCI configuration			CSI-RS.Config.0	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	

	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)		dB	0	
N_{oc} Note2		dBm/15kHz	-104.7	-104.7
N_{oc} Note2		dBm/SCS	-95.7	-95.7
$\hat{E}_s / I_{ot}$		dB	-Infinity	10
$\hat{E}_s / N_{oc}$		dB	-Infinity	10
Io Note3		dBm/ 95.04MHz	-66.7	-55.4
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.

Note 6: Information about types of UE beam is given in 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation.

The UE shall start to transmit the PRACH to Cell 2 less than $D_{handover1}$ from the beginning of time period T3. The interruption on Cell 1 shall not exceed $T_{interrupt1}$ as defined in TS 38.133 [6] Table 6.1.3.4.2-1 for synchronous DAPS HO. The rate of correct handovers observed during repeated tests shall be at least 90%, where:

$D_{handover1} = T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

- $T_{RRC_procedure}$= 10 ms, is the RRC procedure delay specified in 38.331 [13] clause 12;

- T_{search} = 0 ms for known target cell, is the the time required to search the target cell specified in 38.133 [6] clause 6.1.1.2.2;

T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell specified in 38.133 [6] clause 6.1.1.2.2.

- $T_{processing}$ = 40 ms, is the time for UE processing specified in 38.133 [6] clause 6.1.1.2.2.

- T_{Δ} = 20 ms, is the time for fine time tracking and acquiring full timing information of the target cell specified in 38.133 [6] clause 6.1.1.2.2.

- T_{margin} = 2 ms, is the time for SSB post-processing specified in 38.133 [6] clause 6.1.1.2.2.

This gives a total of 92 ms.

After successful RACH to cell 2 and until the start of time period T4, UE shall be able to receive PDSCH alternatively from Cell 1 and Cell 2. UE is not expected to transmit UL to both cell 1 and cell 2 in the same TTI.

The UE shall release Cell 1 less than $D_{handover2}$ from the beginning of time period T4, where:

$D_{handover2} = T_{RRC_procedure} + T_{interrupt2}$

- $T_{RRC_procedure}$= 10 ms, is the RRC procedure delay specified in 38.331 [13] clause 12;

- $T_{interrupt2}$ = 1.125 ms for sync intra-frequency DAPS handover, is the allowed interruption length during $D_{handover2}$ as in 38.133 [13] clause 6.1.1.2.2;

This gives a total of 11.125 ms.

UE shall not report CSI to Cell 1 during T5.

7.3.1.5 NR SA FR1-FR2 asynchronous DAPS handover

Editor's Note:

- This test case is incomplete since FR1-FR2 OTA testability is still FFS.
- MU and TT analysis is complete for UE PC3 and test frequency f ≤ 40.8 GHz.
- MU and TT analysis is incomplete for test frequency f > 40.8 GHz
- MU and TT analysis is incomplete for UE power class other than PC3.
- Connection diagram may require updates for FR1+FR2 scenarios

7.3.1.5.1 Test purpose

To verify the requirement for the NR FR1-NR FR2 inter-band inter-frequency asynchronous DAPS handover requirements in synchronous scenario specified in 38.133 [6] clause 6.1.3.4.

7.3.1.5.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and supporting inter-frequency asynchronous DAPS handover and supporting different SCSs in source PCell and inter-frequency target PCell in DAPS handover.

7.3.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.1.5.

7.3.1.5.4 Test description

7.3.1.5.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.1.5.4.1-1.

Table 7.3.1.5.4.1-1: NR SA FR1-FR2 asynchronous DAPS handover test configurations

Config	Description
7.3.1.5-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.3.1.5-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.3.1.5-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.3.1.5.4.1-2

Table 7.3.1.5.4.1-2: Initial conditions for NR SA FR1-FR2 asynchronous DAPS handover

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the test configuration selected from Table 7.3.1.5.4.1-1	

Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	[A.3.3.3.1-1]	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.1.5.4.3.
2. The power levels and settings for NR FR1 Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.3.1.5.4.1-3 below, with A4-Threshold modified by Test Tolerance.

Table 7.3.1.5.4.1-3: General test parameters for NR SA FR1-FR2 asynchronous DAPS handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A4-Threshold		dBm	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells		µs	62.5	Asynchronous cells
T1		s	5	
T2		s	<5	
T3		s	<0.5	
T4		ms	$10+T_{interrupt2}$	$T_{interrupt2}$ as defined in Table 6.1.3.4.2-2 for asynchronous DAPS HO.
T5		ms	100	

7.3.1.5.4.2 Test procedure

Same test procedure as described in clause 7.3.1.4.4.2.

7.3.1.5.4.3 Message contents

Same message contents as described in clause 7.3.1.4.4.3.

7.3.1.5.5 Test requirements

Table 7.3.1.5.5-1 and Table 7.3.1.5.5-2 defines the primary level settings including test tolerances for all tests.

Table 7.3.1.5.5-1: Cell specific test parameters for NR SA FR1-FR2 asynchronous DAPS handover (Cell 1 in FR1)

Parameter		Unit	Cell 1	
			T1	T2 - T5
NR RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		40: $N_{RB,c}$ = 106	

TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
DRX Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
OCNG Patterns			OP.1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity	Config 1,2	slot	5
	Config 3		10
CSI reporting offset	Config 1,2	slot	3
	Config 3		5
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1,2		SMTC.1
	Config 3		SMTC.2
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PRACH configuration			FR1 PRACH configuration 2
BWP	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.3
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.3
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	NA Link only, see clause A.3.7A
N_{oc} Note2	Config 1,2	dBm/SCS	
	Config 3		
$\hat{E}_s / I_{ot}$		dB	
$\hat{E}_s / N_{oc}$		dB	
Io Note3	Config 1,2	dBm/ 9.36MHz	
	Config 3	dBm/ 38.16MHz	
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 7.3.1.5.5-2: Cell specific test parameters for NR SA FR1-FR2 asynchronous DAPS handover (Cell 2 in FR2)

Parameter		Unit	Cell 2	
			T1	T2 - T5
Assumption for UE beams Note 6			Rough	
AoA setup			Setup 1 as defined in A.9	
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		TDD	
TDD configuration	Config 1,2,3		TDDConf.3.1	
$BW_{channel}$	Config 1,2,3	MHz	100: $N_{RB,c}$ = 66	
BWP BW	Config 1,2,3	MHz	100: $N_{RB,c}$ = 66	
TRS configuration	Config 1,2,3		TRS.2.1 TDD	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR.3.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR.3.1 TDD	
OCNG Patterns			OP.1	
CSI-RS configuration for CSI reporting	Config 1,2,3		CSI-RS.3.1 TDD	
SSB Configuration	Config 1,2,3		SSB.1 FR2	
SMTC Configuration			SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	
PRACH configuration			FR2 PRACH configuration 2	
TCI configuration			CSI-RS.Config.0	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-104.7	-104.7
N_{oc} Note2		dBm/SCS	-95.7	-95.7
$\hat{E}_s / I_{ot}$		dB	-Infinity	10
$\hat{E}_s / N_{oc}$		dB	-Infinity	10
Io Note3		dBm/ 95.04MHz	-66.7	-55.4
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Same Test requirements as described in clause 7.3.1.4.5.

7.3.2 RRC connection mobility control

7.3.2.1 RRC re-establishment

7.3.2.1.0 Minimum conformance requirements

In RRC_CONNECTED state the UE shall be capable of sending *RRCReestablishmentRequest* message within $T_{re\text{-}establish_delay}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re\text{-}establish_delay}$) shall be less than:

$$T_{re\text{-}establish_delay} = T_{UE_re\text{-}establish_delay} + T_{UL_grant}$$

T_{UL_grant}: It is the time required to acquire and process uplink grant from the target PCell. The uplink grant is required to transmit *RRCReestablishmentRequest* message.

The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in clause 5.3.7 in TS 38.331 [2] is detected by the UE and when the UE sends PRACH to the target PCell. The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) requirement shall be less than:

$$T_{UE_re\text{-}establish_delay} = 50ms + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI\text{-}NR} + T_{PRACH}$$

The intra-frequency target NR cell shall be considered detectable when for each relevant SSB can satisfy that:

- SS-RSRP related side conditions given in Section 10.1.2 and 10.1.3 are fulfilled for a corresponding NR Band for FR1 and FR2, respectively,
- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding NR Band are fulfilled.

The inter-frequency target NR cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in Section 10.1.4 and 10.1.5 are fulfilled for a corresponding NR Band for FR1 and FR2, respectively,
- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding NR Band are fulfilled.

$T_{identify_intra_NR}$: It is the time to identify the target intra-frequency NR cell and it depends on whether the target NR cell is known cell or unknown cell and on the frequency range (FR) of the target NR cell. If the UE is not configured with intra-frequency NR carrier for RRC re-establishment then $T_{identify_intra_NR}$=0; otherwise $T_{identify_intra_NR}$ shall not exceed the values defined in table 6.2.1.2.1-1.

$T_{identify_inter_NR,i}$: It is the time to identify the target inter-frequency NR cell on inter-frequency carrier *i* configured for RRC re-establishment and it depends on whether the target NR cell is known cell or unknown cell and on the frequency range (FR) of the target NR cell. $T_{identify_inter_NR,i}$ shall not exceed the values defined in table 6.2.1.2.1-2.

T_{SMTC}: It is the periodicity of the SMTC occasion configured for the intra-frequency carrier. If the UE has been provided with higher layer in TS 38.331 [2] signalling of *smtc2*, T_{smtc} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier *i*. If it is not configured, the UE may assume that the target SSB periodicity is no larger than 20 ms.

$T_{SI\text{-}NR}$ = It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for the target NR cell.

T_{PRACH} = It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{PRACH} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

N_{freq}: It is the total number of NR frequencies to be monitored for RRC re-establishment; N_{freq} = 1 if the target intra-frequency NR cell is known, else N_{freq} = 2 and $T_{identify_intra_NR}$ = 0 if the target inter-frequency NR cell is known.

There is no requirement if the target cell does not contain the UE context.

Table 6.2.1.2.1-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell

Serving cell SSB Ês/Iot (dB)	Frequency range (FR) of target NR cell	$T_{identify_intra_NR}$ (ms)	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 5 x T_{SMTC})	MAX (800 ms, 10 x T_{SMTC})
≥ -8	FR2	N/A	MAX (1000 ms, 80 x T_{SMTC}))
< -8	FR1	N/A	800[Note1]
< -8	FR2	N/A	3520[Note1]
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when T_{SMTC} > 20 ms and serving cell SSB Ês/Iot < [-8] dB.			

Table 6.2.1.2.1-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell

Serving cell SSB Ês/Iot (dB)	Frequency range (FR) of target NR cell	$T_{identify_inter_NR,\ i}$ (ms)	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 6 x $T_{SMTC,\ i}$)	MAX (800 ms, 13 x $T_{SMTC,\ i}$)
≥ -8	FR2	N/A	MAX (1000 ms, 104 x $T_{SMTC,\ i}$))
< -8	FR1	N/A	800[Note1]
< -8	FR2	N/A	4000[Note1]
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{SMTC,i}$ > 20 ms and serving cell SSB Ês/Iot < -8 dB.			

The normative reference for this requirement is TS 38.133 [6] clause 6.2.1.

7.3.2.1.1 NR SA FR2 RRC re-establishment

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.3.2.1.1.1 Test purpose

The purpose of this test is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits.

7.3.2.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.3.2.1.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.3.2.1.0

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.2.1.1

7.3.2.1.1.4 Test description

7.3.2.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.3.2.1.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 7.3.2.1.1.4.1-2. Test environment parameters are given in Table 7.3.2.1.1.4.1-3.

Table 7.3.2.1.1.4.1-1: Intra-frequency RRC re-establishment in FR2 supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table 7.3.2.1.1.4.1-2: General test parameters for Intra-frequency RRC re-establishment in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 μs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
SMTC configuration			1	SMTC.1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	PRACH.1 FR2	As specified in Annex A.7
T1		s	1	5	
T2		s	1	4.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1	5	

Table 7.3.2.1.1.4.1-3: Test Environment Intra-frequency RRC re-establishment in FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5.1 and TS 38.508-1 [14] clause 7.2.3 and 4.4.2		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.2.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.3.2.1.1.4.3.

2. There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.1.1 and C.1.2 for this test.

3. The AoA setup for this test is Setup 1 as defined in clause A.9

7.3.2.1.1.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure.

1. Ensure the UE is in RRC_CONNECTED state with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.3.2.1.1.5-1. T1 starts.

3. SS shall transmit an RRCReconfiguration message.

4. The UE shall transmit RRCReconfigurationComplete message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.3.2.1.1.5-1. T2 starts

6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 7.3.2.1.1.5-1. T3 starts

7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within 9840 ms (=4840ms + 5 s) from the beginning of time period T2, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

9. Set cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

7.3.2.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.3.2.1.1.4.3-1: Common Exception messages for NR intra-frequency RRC re-establishment test case in FR2

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.5-9 with condition SSB RLM

Table 7.3.2.1.1.4.3-2: *RLF-TimersAndConstants* for intra-frequency RRC re-establishment

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
t311	ms5000		
}			

Table 7.3.2.1.1.4.3-3: *MeasConfig* for intra-frequency RRC re-establishment

Derivation Path: TS 38.508-1 [14], Table 4.6.3-69

Information Element	Value/remark	Comment	Condition
MeasConfig::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
quantityConfig	Not present		
}			

7.3.2.1.1.5 Test requirement

Table 7.3.2.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.2.1.1.5-1: Cell specific test parameters for NR intra-frequency RRC re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1	66			66		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 FDD			CR.3.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 FDD			CCR.3.1 FDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1			OP.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
AoA setup		1	Setup 1			Setup 1		
$\hat{E}_s / I_{ot}$	dB	1	-0.12	-infinity	-infinity	-3.46	2	2
N_{oc} Note2	dBm/SCS	1	-104.7					
N_{oc} Note2	dBm/15 kHz	1	-95.7					
$\hat{E}_s / N_{oc}$	dB	1	4	-infinity	-infinity	2	2	2
SS-RSRP Note3	dBm/SCS	1	-91.7	-infinity	-infinity	-93.7	-93.7	-93.7
Io	dBm/95.04 MHz	1	-59.64	-62.59	-62.59	-59.94	-62.59	-62.59
Propagation Condition		1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in TS 38.133 in Annex B.2.1.3, and does not limit UE implementation or test system implementation

The RRC re-establishment delay is defined as the time from moment UE declares RLF, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell shall be less than 5 s, allow 9.84 s (4.84 s + 5 s) from the beginning of T2 in the test case The rate of correct RRC re-establishments observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.3.2.1.2 NR SA FR2 - FR2 RRC re-establishment

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.3.2.1.2.1 Test purpose

The purpose of this test is to verify that the NR inter-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits.

7.3.2.1.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.3.2.1.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.3.2.1.0

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.2.1.2

7.3.2.1.2.4 Test description

7.3.2.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.3.2.1.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 7.3.2.1.2.4.1-2. Test environment parameters are given in Table 7.3.2.1.2.4.1-3.

Table 7.3.2.1.2.4.1-1: Inter-frequency RRC re-establishment in FR2 supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table 7.3.2.1.2.4.1-2: General test parameters for Inter-frequency RRC re-establishment in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1, 2	
Time offset between cells			1	3 µs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
SMTC configuration			1	SMTC.1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	PRACH.1 FR2	As specified in Annex A.7
T1		s	1	5	

T2	s	1	4.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1	6	

Table 7.3.2.1.2.4.1-3: Test Environment Inter-frequency RRC re-establishment in FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table FFS and TS 38.508-1 [14] clause 7.2.3 and 4.4.2		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.2.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.3.2.1.2.4.3
2. There are two cells on two NR carriers specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.1.1 and C.1.2 for this test.
3. The AoA setup for this test is Setup 1 as defined in clause A.9

7.3.2.1.2.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

1. Ensure the UE is in RRC_CONNECTED state with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 7.3.2.1.2.5-1. T1 starts.
3. SS shall transmit an RRCReconfiguration message.
4. The UE shall transmit RRCReconfigurationComplete message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.3.2.1.2.5-1. T2 starts
6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 7.3.2.1.2.5-1. T3 starts
7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within 6 seconds from the beginning of time period T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
9. Set cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

7.3.2.1.2.4.3 Message contents

Same message content as in 7.3.2.1.1.4.3. Table 7.3.2.1.2.4.3-1: Void

Table 7.3.2.1.2.4.3-2: *RLF-TimersAndConstants* for intra-frequency RRC re-establishment

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
t311	ms5000		
}			

Table 7.3.2.1.2.4.3-3: *MeasConfig* for intra-frequency RRC re-establishment

Derivation Path: TS 38.508-1 [14], Table 4.6.3-69			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
quantityConfig	Not present		
}			

7.3.2.1.2.5 Test requirement

Table 7.3.2.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.2.1.2.5-1: Cell specific test parameters for NR intra-frequency RRC re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4			Rough			Rough		
AoA setup		1	Setup 3					
			AoA1			AoA2		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 FDD			CR.3.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 FDD			CCR.3.1 FDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1			OP.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
$\hat{E}_s / I_{ot}$	dB	1	5+TT	-infinity	-infinity	-infinity	-infinity	8+TT
N_{oc} Note2	dBm/SCS	1	-98+TT					
N_{oc} Note2	dBm/15 kHz	1	-89+TT					
$\hat{E}_s / N_{oc}$	dB	1	5+TT	-infinity	-infinity	-infinity	-infinity	8+TT
SS-RSRP Note3	dBm/SCS	1	-84+TT	-infinity	-infinity	-infinity	-infinity	-81+TT

Io	dBm/95.04 MHz	1	-53.82+TT	-infinity	-infinity	-infinity	-infinity	-51.37 +TT
Propagation Condition		1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.3.2.1.3 NR SA FR2 RRC re-establishment without serving cell timing

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

7.3.2.1.3.1 Test purpose

The purpose of this test is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without serving cell timing is within the specified limits, and to verify the requirements in TS 38.133 [6] clause 6.2.1

7.3.2.1.3.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.3.2.1.3.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.3.2.1.0

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.2.1.3

7.3.2.1.3.4 Test description

7.3.2.1.3.4.1 Initial conditions

The test shall be tested using any of the test configuration in Table 7.3.2.1.3.4.1-1.

Table 7.3.2.1.3.4.1-1: Supported test configurations for NR SA FR2 RRC re-establishment without serving cell timing

Config	Description
7.3.2.1.3-1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Configure the test requirement and the DUT according to the parameters in Table 7.3.2.1.3.4.1-2.

Table 7.3.2.1.3.4.1-2: Initial conditions for NR SA FR2 RRC re-establishment without serving cell timing

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5.1 and TS 38.508-1 [14] clause 7.2.3 and 4.4.2		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.2.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 7.3.2.1.3.4.1-3.
2. Message contents are defined in clause 7.3.2.1.3.4.3.

There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for registration with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.3.2.1.3.4.1-3: General test parameters for NR SA FR2 RRC re-establishment without serving cell timing

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 µs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	6000	Radio link failure timer configured by *RLF-TimersAndConstants*
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	
PRACH configuration index			1	PRACH.1 FR2	
T1		s	1	5	
T2		s	1	10.84	Time for the UE to detect RLF (Summation of TEvaluate_out_SSB defined in clause 8.1 in TS 38.133 [6], T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133 [6])
T3		s	1	5	

7.3.2.1.3.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 7.3.2.1.3.5-1. T1 starts.
3. SS shall transmit an RRCReconfiguration message.
4. The UE shall transmit RRCReconfigurationComplete message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.3.2.1.3.5-1. T2 starts
6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 7.3.2.1.3.5-1. T3 starts
7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within 5 s from the beginning of time period T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off and on the UE) or switch off and on the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
9. Set cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

7.3.2.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.3.2.1.3.4.3-1: Common Exception messages for NR SA FR2 RRC re-establishment without serving cell timing

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.5-9 with condition SSB RLM

Table 7.3.2.1.3.4.3-2: *RLF-TimersAndConstants* for intra-frequency RRC re-establishment

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms6000		
t311	ms5000		
}			

Table 7.3.2.1.3.4.3-3: *MeasConfig* for intra-frequency RRC re-establishment

Derivation Path: TS 38.508-1 [14], Table 4.6.3-69			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
quantityConfig	Not present		
}			

7.3.2.1.3.5 Test requirement

Table 7.3.2.1.3.5-1 defines the primary level settings including test tolerances for NR SA FR2 RRC re-establishment without serving cell timing tests.

Table 7.3.2.1.3.5-1: Cell specific test parameters for NR SA FR2 - FR2 RRC re-establishment without serving cell timing

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 FDD			CR.3.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 FDD			CCR.3.1 FDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.2.1			OP.1 defined in A.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
AoA setup		1	Setup 1 defined in A. 9			Setup 1 defined in A.9		
$\hat{E}_s / I_{ot}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5
N_{oc} Note2	dBm/SCS	1	-95.7					
N_{oc} Note2	dBm/15 kHz	1	-104.7					
$\hat{E}_s / N_{oc}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5
SS-RSRP Note3	dBm/SCS	1	-90.7	-infinity	-infinity	-infinity	-infinity	-90.7
Io	dBm/95.04 MHz	1	-60.52	-66.71	-60.52	-60.52	-66.71	-60.52
Propagation Condition		1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

N_{freq} = 1

$T_{identify_intra_NR}$ = 3520 ms

T_{SI} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

7.3.2.2 Random access

7.3.2.2.0 Minimum conformance requirements

7.3.2.2.0.1 Minimum conformance requirements for Contention based random access

The random access procedure is used when establishing the layer 1 communication between the UE and NG-RAN. The random access is as defined in TS 38.213 [8] clause 7.4 and the control of the RACH transmission is as defined in TS 38.321 [12] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 38.213 [8] clause 7.4 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in TS 38.101-2 [3] Table 6.3.4.2-1. The relative power applied to additional preambles shall have an accuracy as specified in TS 38.101-2 [3] Tables 6.3.4.3-1 and 6.3.4.3-2.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in TS 38.321 [12] clause 5.1.4.

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2 in TS 38.321 [12].

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [12].

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires unless the

received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

The normative reference for this requirement is TS 38.133 [6] clause 6.2.2.

7.3.2.2.0.2 Minimum conformance requirements for Non-Contention based random access

The random access procedure is used when establishing the layer 1 communication between the UE and NG-RAN. The random access is as defined in TS 38.213 [8] clause 7.4 and the control of the RACH transmission is as defined in TS 38.321 [12] clause 5.1.

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula as defined in TS 38.213 [8] clause 7.4 and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as defined in TS 38.101-2 [3] Table 6.3.4.2-1. The relative power applied to additional preambles shall have an accuracy as specified in TS 38.101-2 [3] Tables 6.3.4.3-1 and 6.3.4.3-2.

The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in TS 38.321 [12] clause 5.1.4.

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs is configured, with the UE selected CSI-RS with CSI-RSRP above *cfra-csirs-DedicatedRACH-Threshold* amongst the associated CSI-RSs, UE shall have the capability to select the Random Access Preamble corresponding to the selected CSI-RS, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clause 6.2.2.

Non-contention based random access procedure is not initialized for Other SI requested from UE or for beam failure recovery, so the requirements related to those features are omitted.

Editor's note: This test case is incomplete for Test 2, 3 and 7. The following aspects are either missing or not yet determined:

- The settable window for first preamble uplink power and the uplink calibration process are FFS.

- The test requirement for absolute uplink power is FFS.
- The test requirement for relative uplink power is FFS.
- The uncertainty value and test requirement for PRACH timing are in [ ]
- The results of the TT analysis are provisional until the corresponding MU values are agreed
- This test case has testability issues due to low uplink level for absolute uplink power and unapplicable requirement for relative uplink power, and therefore testing of Test 2, 3 and 7 is not recommended.

7.3.2.2.1.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits.

7.3.2.2.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.3.2.2.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.3.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.2.2.1.

7.3.2.2.1.4 Test description

7.3.2.2.1.4.1 Initial conditions

This test can be run in the configurations defined in Table 7.3.2.2.1.4.1-1.

Table 7.3.2.2.1.4.1-1: Contention based random access test in FR2 for NR standalone supported test configurations

Test Case ID	Description
7.3.2.2.1-1	NR: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Before the test procedure, Downlink and Uplink calibrations are carried out to derive signalled parameter values. This is necessary to ensure that the test case operates within the specified ranges. The detail of the calibration process is implementation dependent, but shall derive the values of Δ_{DL} and Δ_{UL} according to the following principles:

With the UE configured to report SS-RSRP, the Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value according to TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied at the Reference point. For a Reported value RSRP_x, x is treated as a positive integer value.

With the UE configured to send a first PRACH preamble, Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied at the Reference point, and with signalled values *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm.

Configure the test equipment and the DUT according to the parameters in Table 7.3.2.2.1.4.1-2.

Table 7.3.2.2.1.4.1-2: Test Environment for Contention based random access test in FR2 for NR standalone

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.2.2.1.4.1-1.		
Propagation conditions	No interference		As specified in Annex C.2.1.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	

Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 7.3.2.2.1.4.3.

2. Cell 1 is the NR FR2 serving cell (PCell). The connection setup is done according to the settings in clause C.1.3, with downlink signal levels as per clause C.1.2. General Test parameters are defined in Table 7.3.2.2.1.5-1.

3. Downlink signals for NR cell are initially set up according to clause C.2.1.

4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.3.2.2.1.4.2 Test procedure

The test consists of a single cell, configured as PCell in FR2. The System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity *NR* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 7.3.2.2.1.5-1 and 7.3.2.2.1.5-2.

3. The UE shall establish a connection setup with SS, the random access procedure within the connection setup is used in the test.

4. Test 1: Correct behaviour when transmitting Random Access Preamble

   4.1. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured rsrp-ThresholdSSB.

5. Test 2: Correct behaviour when receiving Random Access Response

   5.1. Repeat steps 1-3.

   5.2. The UE shall send preambles to the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

   5.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

   5.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator.

   5.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

   5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 7.3.2.2.1.5. Measure the relative power and timing applied to additional preambles (last 2 preambles) and it shall not exceed the values specified in 7.3.2.2.1.5.

6. Test 3: Correct behaviour when not receiving Random Access Response

   6.1. Repeat steps 1-3.

   6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 2 preambles.

6.3. As no Random Access Response was received within the RA Response window, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator.

6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 7.3.2.2.1.5. Measure the relative power and timing applied to additional preambles (last 2 preambles) and it shall not exceed the values specified in 7.3.2.2.1.5.

7. Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission

7.1. Repeat steps 1-3.

7.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

7.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

7.4. The System Simulator shall send PDCCH addressed to the Temporary C-RNTI after receiving the msg3.

7.5. The UE shall re-transmit the msg3.

7.6. The System Simulator shall check if UE re-transmit the msg3.

8. Test 5: Correct behaviour when receiving an unsuccessful UE Contention Resolution

8.1. Repeat steps 1-3.

8.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

8.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

8.4. The System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element not matching the CCCH SDU transmitted in msg3 uplink message.

8.5. As the UE Contention Resolution Identity included in the MAC control element did not match the CCCH SDU transmitted in the uplink message, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

8.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 7.3.2.2.1.5.

9. Test 6: Correct behaviour when receiving a successful UE Contention Resolution

9.1. Repeat steps 1-3.

9.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

9.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

9.4. The System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in msg3 uplink message.

9.5. As the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU, the Contention Resolution is successful and the UE shall send ACK.

10. Test 7: Correct behaviour when contention Resolution timer expires

10.1. Repeat steps 1-3.

10.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

10.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

10.4. The System Simulator shall not send a response.

10.5. As there was no response, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the Contention Resolution Timer expires and then after the backoff timer expires.

10.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 7.3.2.2.1.5.

7.3.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.3.2.2.1.4.3-1: *FrequencyInfoUL-SIB* for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-62			
Information Element	**Value/remark**	**Comment**	**Condition**
FrequencyInfoUL-SIB SEQUENCE {			
p-Max	23	23 dBm	UE PC3
	35	35 dBm	UE PC1
}			

Table 7.3.2.2.1.4.3-2: RACH-ConfigCommon for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n48		FR2
}			
groupBconfigured SEQUENCE {			
numberOfRA-PreamblesGroupA	48		
}			
ra-ContentionResolutionTimer	sf48		
rsrp-ThresholdSSB	RSRP_69 +Δ_{DL}	Δ_{DL} is derived from the downlink calibration process	
prach-RootSequenceIndex CHOICE {			
l139	0		
}			
msg1-SubcarrierSpacing	kHz 120		

}			

Table 7.3.2.2.1.4.3-3: RACH-ConfigGeneric for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		FR2
msg1-FDM	one		FR2
zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-100		
preambleTransMax	n6		
powerRampingStep	dB2		
ra-ResponseWindow	sl10		
}			

Table 7.3.2.2.1.4.3-4: *ServingCellConfigCommonSIB* for Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-169			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommonSIB ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	20 +Δ_{UL}	Δ_{UL} is derived from the uplink calibration process	
}			

7.3.2.2.1.5 Test requirement

Table 7.3.2.2.1.5-2 defines the primary level settings for contention based random access test in FR2 for NR Standalone. Tables 7.3.2.2.1.5-3, 7.3.2.2.1.5-4 and 7.3.2.2.1.5-5 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances.

Table 7.3.2.2.1.5-1: General test parameters for contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 FR2	As defined in A.3.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD	
Duplex Mode for Cell 1	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	As defined in A.1.5
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OP.3	As defined in A.2.1
PDSCH Reference Channel Note 2	Config 1		SR.3.1 TDD	As defined in A.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	As defined in A.1.2
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [13].

			Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)	dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 of TS 38.101-2 [3]
PRACH Configuration		PRACH.1 FR2	As defined in A.7.2, with exceptions as defined below
rsrp-ThresholdSSB	dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower	dBm	-100	As defined in TS 38.331 [13]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.
Note 4: The Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value in TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 7.3.2.2.1.5-2: OTA-related test parameters for contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.9.1
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	

Note 1: No artificial noise is applied in this test.
Note 2: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

Test 1: Correct behaviour when transmitting Random Access Preamble

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.

Test 2: Correct behaviour when receiving Random Access Response

- The power of the first preamble shall be 0.6 dBm within the accuracy specified in Table 7.3.2.2.1.5-3.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 7.3.2.2.1.5-4.

- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 7.3.2.2.1.5-5.

Test 3: Correct behaviour when not receiving Random Access Response

- The power of the first preamble shall be 0.6 dBm within the accuracy specified in Table 7.3.2.2.1.5-3.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 7.3.2.2.1.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 7.3.2.2.1.5-5.

Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission

- The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

Test 5: Correct behaviour when receiving an incorrect message over Temporary C-RNTI

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires.
- The power of the first preamble shall be 0.6 dBm within the accuracy specified in Table 7.3.2.2.1.5-3.
- The transmit timing of the PRACH transmission shall be within the accuracy specified in Table 7.3.2.2.1.5-5.

Test 6: Correct behaviour when receiving a correct message over Temporary C-RNTI

- The UE shall send ACK if the contention resolution is successful.

Test 7: Correct behaviour when contention resolution timer expires

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if the contention resolution timer expires.
- The power of the first preamble shall be 0.6 dBm within the accuracy specified in Table 7.3.2.2.1.5-3.
- The transmit timing of the PRACH transmission shall be within the accuracy specified in Table 7.3.2.2.1.5-5.

Table 7.3.2.2.1.5-3: Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± FFS dB

Table 7.3.2.2.1.5-4: Relative power tolerance Test requirements

Measured power	Power step ΔP (dB)	PRACH (dB)
Measured power of both PRACHs being compared > (P_{max} Note1 – 6dB)	2 ≤ ΔP < 3	± (4+FFS).
Measured power of either PRACHs being compared ≤ (P_{max} Note1 – 6dB)		± (6+FFS)
Note 1: P_{max} is the Min peak EIRP defined in clause 6.2.1 of TS 38.101-2 [3], selected according to power class and operating band.		

Table 7.3.2.2.1.5-5: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
2	120	120	224+[48]*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

7.3.2.2.2 NR SA FR2 non-contention based random access

Editor's note: This test case is incomplete for Test 3 and 4. The following aspects are either missing or not yet determined:

- The settable window for first preamble uplink power and the uplink calibration process are FFS.
- The test requirement for absolute uplink power is FFS.
- The test requirement for relative uplink power is FFS.
- The uncertainty value and test requirement for PRACH timing are in [ ]
- The results of the TT analysis are provisional until the corresponding MU values are agreed
- This test case has testability issues due to low uplink level for absolute uplink power and unapplicable requirement for relative uplink power, and therefore testing of Test 3 and 4 is not recommended.

7.3.2.2.2.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits.

7.3.2.2.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards. Additionally Test 2 is applicable to UE that supports csi-RS-CFRA-ForHO.

7.3.2.2.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.3.2.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.2.2.2.

7.3.2.2.2.4 Test description

7.3.2.2.2.4.1 Initial conditions

This test can be run in the configurations defined in Table 7.3.2.2.2.4.1-1.

Table 7.3.2.2.2.4.1-1: Non-Contention based random access test in FR2 for NR standalone supported test configurations

Test Case ID	Description
7.3.2.2.2-1	NR: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Before the test procedure, Downlink and Uplink calibrations are carried out to derive signalled parameter values. This is necessary to ensure that the test case operates within the specified ranges. The detail of the calibration process is implementation dependent, but shall derive the values of Δ_{DL} and Δ_{UL} according to the following principles:

With the UE configured to report SS-RSRP, the Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value according to TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied at the Reference point. For a Reported value RSRP_x, x is treated as a positive integer value.

With the UE configured to send a first PRACH preamble, Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied at the Reference point, and with signalled values *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm.

Configure the test equipment and the DUT according to the parameters in Table 7.3.2.2.2.4.1-2.

Table 7.3.2.2.2.4.1-2: Test Environment for Non-Contention based random access test in FR2 for NR standalone

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.2.2.2.4.1-1.		
Propagation conditions	No interference		As specified in Annex C.2.1.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.2.2.2.4.3.

2. Cell 1 is the NR FR2 serving cell (PCell). The connection setup is done according to the settings in clause C.1.3, with downlink signal levels as per clause C.1.2. General Test parameters are defined in Table 7.3.2.2.2.5-1.

3. Downlink signals for NR cell are initially set up according to clause C.2.1.

4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.3.2.2.2.4.2 Test procedure

The test consists of a single cell, configured as PCell in FR2. The System Simulator shall explicitly assign a random access preamble via dedicated signalling in the downlink. There are two subtests, to test both SSB-based non-contention based random access (subtest 1) and CSI-RS-based non-contention based random access (subtest 2).

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Ensure the UE will choose SSB with index 0 to complete this procedure.

2. Set the parameters according to Table 7.3.2.2.2.5-1 Subtest 1.

3. The SS shall signal a Random Access Preamble ID via a PDCCH order to the UE and initiate a Non-contention based Random Access procedure.

4. Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble

   4.1. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble has the Preamble Index associated with the SSB with index 0, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

5. Test 2: Correct behaviour when transmitting CSI-RS-based Random Access Preamble

   5.1. Set the parameters according to Table 7.3.2.2.2.5-1 Subtest 2.

   5.2. Repeat steps 1-3

   5.3. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble has the Preamble Index associated with the CSI-RS configured, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

6. Test 3: Correct behaviour when receiving Random Access Response

   6.1. Repeat steps 1-3

   6.2. The UE shall send preambles to the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power.

6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator.

6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 7.3.2.2.2.5. Measure the relative power and timing applied to additional preambles (last 2 preambles) and it shall not exceed the values specified in 7.3.2.2.2.5.

7. Test 4: Correct behaviour when not receiving Random Access Response

7.1. Repeat steps 1-3.

7.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 2 preambles.

7.3. As no Random Access Response was received within the RA Response window configured in *RACH-ConfigCommon*, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power.

7.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator.

7.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

7.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 7.3.2.2.2.5. Measure the relative power and timing applied to additional preambles (last 2 preambles) and it shall not exceed the values specified in 7.3.2.2.2.5.

7.3.2.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.3.2.2.2.4.3-1: *FrequencyInfoUL-SIB* for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-62			
Information Element	**Value/remark**	**Comment**	**Condition**
FrequencyInfoUL-SIB SEQUENCE {			
p-Max	23	23 dBm	UE PC3
	35	35 dBm	UE PC1
}			

Table 7.3.2.2.2.4.3-2: RACH-ConfigCommon for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
ra-ContentionResolutionTimer	Not present		
rsrp-ThresholdSSB	RSRP_69 +Δ_{DL}	Δ_{DL} is derived from the downlink calibration process	Subtest 1

prach-RootSequenceIndex CHOICE {			
l139	0		
}			
msg1-SubcarrierSpacing	kHz 120		
}			

Table 7.3.2.2.2.4.3-3: RACH-ConfigDedicated for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF CFRA-SSB-Resource {	2 entries		
CFRA-SSB-Resource[1] SEQUENCE {			
ssb[1]	0		
ra-PreambleIndex[1]	40		Subtest 1
}			
CFRA-SSB-Resource[1] SEQUENCE {			
ssb[2]	1		
ra-PreambleIndex[1]	40		Subtest 1
}			
}			
ra-ssb-OccasionMaskIndex	1		Subtest 1
}			
csirs SEQUENCE {			
csirs-ResourceList SEQUENCE (SIZE(1..maxRA- CSIRS -Resources)) OF {			
ra-OccasionList	1		Subtest 2
ra-PreambleIndex[1]	40		Subtest 2
}			
rsrp-ThresholdCSI-RS	RSRP_69 +Δ_{DL}	Δ_{DL} is derived from the downlink calibration process	Subtest 2
}			
}			
}			
}			

Table 7.3.2.2.2.4.3-4: RACH-ConfigGeneric for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		FR2
msg1-FDM	one		FR2
zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-100		
preambleTransMax	n6		
powerRampingStep	dB2		
ra-ResponseWindow	sl10		
}			

Table 7.3.2.2.2.4.3-5: *ServingCellConfigCommonSIB* for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-169			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommonSIB ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	20 +Δ_{UL}	Δ_{UL} is derived from the uplink calibration process	
}			

Table 7.3.2.2.2.4.3-6: CellGroupConfig for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex		
reconfigurationWithSync SEQUENCE {			
newUE-Identity	1		
t304	ms1000		
rach-ConfigDedicated CHOICE {			
uplink	RACH-ConfigDedicated for Non-Contention Based Random Access	Table 7.3.2.2.2.4.3-3	
}			
spCellConfigDedicated SEQUENCE {			
firstActiveDownlinkBWP-Id	BWP-Id		
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
srs-Config	SRS-Config		
}			
firstActiveUplinkBWP-Id	BWP-Id		
}			
}			

7.3.2.2.2.5 Test requirement

Table 7.3.2.2.2.5-2 defines the primary level settings for non-contention based random access test in FR2 for NR Standalone. Tables 7.3.2.2.2.5-3, 7.3.2.2.2.5-4 and 7.3.2.2.2.5-5 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances.

Table 7.3.2.2.2.5-1: General test parameters for non-contention based random access test in FR2 for NR Standalone

Parameter		**Unit**	**Test-1**	**Test-2**	**Comments**
SSB Configuration	Config 1		SSB.1 FR2	SSB.1 FR2	As defined in A.3.2
CSI-RS Configuration	Config 1		N/A	CSI-RS.3.1 TDD	As defined in A.1.4
Duplex Mode for Cell 2	Config 1		TDD	TDD	
TDD Configuration	Config 1		TDDConf.3.1	TDDConf.3.1	As defined in A.1.5
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 24	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OP.3	OP.3	As defined in A.2.1.
PDSCH Reference Channel Note 2	Config 1		SR3.1 TDD	SR3.1 TDD	As defined in A.1.1.
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	CR.3.1 TDD	As defined in A.1.2
NR RF Channel Number			1	1	

EPRE ratio of PSS to SSS	dB	0	0	
EPRE ratio of PBCH_DMRS to SSS	dB			
EPRE ratio of PBCH to PBCH_DMRS	dB			
EPRE ratio of PDCCH_DMRS to SSS	dB			
EPRE ratio of PDCCH to PDCCH_DMRS	dB			
EPRE ratio of PDSCH_DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH_DMRS	dB			
ss-PBCH-BlockPower	dBm/ SCS	+20 +Δ_{UL}	+20 +Δ_{UL}	As defined in TS 38.331 [13]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,c}$)	dBm	maximum value configurable for certain power class	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [3]
PRACH Configuration		PRACH.2 FR2	PRACH.3 FR2	As defined in A.7.2, with exceptions as defined below.
rsrp-ThresholdSSB	dBm	RSRP_69 +Δ_{DL}	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower	dBm	-100	-100	As defined in TS 38.331 [13]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.

Note 4: The Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value in TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 7.3.2.2.2.5-2: OTA-related test parameters for non-contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
AoA setup			Setup 1	Setup 1	As defined in A.9.1
Assumption for UE beams Note 2			Rough	Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	-80.6	
	Es/Iot$_{BB}$	dB	21.09	21.09	
	Io	dBm/95.04 MHz	-56.01	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	-95.0	
	Es/Iot$_{BB}$	dB	6.69	6.69	
	Io	dBm/95.04 MHz	-70.41	-70.41	Io in symbols containing SSB index 1

Propagation Condition	-	No external noise (Note 3)	No external noise (Note 3)	

Note 1: No artificial noise is applied in this test.
Note 2: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.
- The Random Access Preamble shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0.
- The selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

Test 2: Correct behaviour when transmitting CSI-RS-based Random Access Preamble

- The Random Access Preamble shall have the Preamble Index associated with the CSI-RS configured.
- The Random Access Preamble shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured.
- The selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

Test 3: Correct behaviour when receiving Random Access Response

- The power of the first preamble shall be 0.6 dBm within the accuracy specified in Table 7.3.2.2.2.5-3.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 7.3.2.2.2.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 7.3.2.2.2.5-5.

Test 4: Correct behaviour when not receiving Random Access Response

- The power of the first preamble shall be 0.6 dBm within the accuracy specified in Table 7.3.2.2.2.5-3.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 7.3.2.2.2.5-4.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 7.3.2.2.2.5-5.

Table 7.3.2.2.2.5-3: Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± FFS dB

Table 7.3.2.2.2.5-4: Relative power tolerance Test requirements

Measured power	Power step ΔP (dB)	PRACH (dB)
Measured power of both PRACHs being compared > (P_{max}^{Note1} – 6dB)	2 ≤ ΔP < 3	± (4+FFS).
Measured power of either PRACHs being compared ≤ (P_{max}^{Note1} – 6dB)		± (6+FFS)

Note 1: P_{max} is the Min peak EIRP defined in clause 6.2.1 of TS 38.101-2 [3], selected according to power class and operating band.

Table 7.3.2.2.2.5-5: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
2	120	120	224+[48]*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

7.3.2.2.3 NR SA FR2 2-step contention based random access

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The settable window for first preamble uplink power and the uplink calibration process are FFS.
- The test requirement for absolute uplink power is FFS.
- The test requirement for relative uplink power is FFS.
- The uncertainty value and test requirement for T_e Timing error are in [ ]
- TT analysis is missing
- Antenna diagram and any exceptions are FFS
- Connection setup in Annex C is FFS

7.3.2.2.3.1 Test purpose

The purpose of this test is to verify that the behaviour of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH and MsgA PUSCH power settings and timing are within specified limits.

7.3.2.2.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting twoStepRACH-r16.

7.3.2.2.3.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.3.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.2.2.3.

7.3.2.2.3.4 Test description

7.3.2.2.3.4.1 Initial conditions

This test can be run in the configurations defined in Table 7.3.2.2.3.4.1-1.

Table 7.3.2.2.3.4.1-1: 2-step contention based random access test in FR2 for NR standalone supported test configurations

Test Case ID	Test Config Index	Description
7.3.2.2.3-1	1	NR: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability		

Before the test procedure, Downlink and Uplink calibrations are carried out to derive signalled parameter values. This is necessary to ensure that the test case operates within the specified ranges. The detail of the calibration process is implementation dependent, but shall derive the values of Δ_{DL} and Δ_{UL} according to the following principles:

With the UE configured to report SS-RSRP, the Δ_{DL} value is calculated as ($RSRP_{_REP}$ – RSRP_76), where $RSRP_{_REP}$ is the SS-RSRP Reported value according to TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied at the Reference point. For a Reported value RSRP_x, x is treated as a positive integer value.

With the UE configured to send a first PRACH preamble, Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied at the Reference point, and with signalled values *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm.

Configure the test equipment and the DUT according to the parameters in Table 7.3.2.2.3.4.1-2.

Table 7.3.2.2.3.4.1-2: Test Environment for 2-step RACH contention based random access test in FR2 for NR standalone

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.2.2.3.4.1-1.		
Propagation conditions	No interference		As specified in Annex C.2.1.
Connection Diagram	TE Part	FFS	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	FFS	
Exceptions to connection diagram	FFS		

1. Message contents are defined in clause 7.3.2.2.3.4.3.

2. Cell 1 is the NR FR2 serving cell (PCell). The connection setup is done according to the settings in FFS.

7.3.2.2.3.4.2 Test procedure

The test consists of a single cell, configured as PCell in FR2. The System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity *NR* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 7.3.2.2.3.5-1 and 7.3.2.2.3.5-2.

3. The UE shall establish a connection setup with SS, the random access procedure within the connection setup is used in the test.

4. Test 1: Correct behaviour when transmitting MsgA

   4.1. The UE shall send the MsgA PRACH and MsgA PUSCH to the System Simulator with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*. The UE shall send the MsgA PUSCH on the MsgA PUSCH occasion that is associated with the chosen preamble.

5. Test 2: Correct behaviour when receiving MsgB

   5.1. Repeat steps 1-3.

   5.2. The UE shall send preambles to the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

   5.3. The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [20], and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble of MsgA.

   5.4 The System Simulator shall transmit a MsgB containing fallbackRAR message with a Random Access Preamble identifier matching the transmitted MsgA PRACH after 3 MsgA transmissions have been received by the System Simulator.

   5.5 As the received Random Access Response MsgB with a fallbackRAR contains Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, the UE may stop monitoring for MsgB(s) and shall transmit the msg3 on the indicated PUSCH resources.

   5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 7.3.2.2.3.5. Measure the relative power and timing applied to additional preambles (last 2 preambles) and it shall not exceed the values specified in 7.3.2.2.3.5.

6. Test 3: Correct behaviour when not receiving MsgB

6.1. Repeat steps 1-3.

6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 2 preambles.

6.3. The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [20], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

6.4. Measure the power and timing of the first preamble and it shall not exceed the values specified in 7.3.2.2.3.5. Measure the relative power and timing applied to additional preambles (last 2 preambles) and it shall not exceed the values specified in 7.3.2.2.3.5.

7.3.2.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.3.2.2.3.4.3-1: *FrequencyInfoUL-SIB* for 2-step contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-62			
Information Element	**Value/remark**	**Comment**	**Condition**
FrequencyInfoUL-SIB SEQUENCE {			
p-Max	23	23 dBm	
}			

Table 7.3.2.2.3.4.3-2: RACH-ConfigCommon for 2-step contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-128A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommonTwoStepRA-r16 ::= SEQUENCE {			
rach-ConfigGenericTwoStepRA-r16	RACH-ConfigGenericTwoStepRA		
msgA-TotalNumberOfRA-Preambles-r16	48		
msgA-SSB-PerRACH-OccasionAndCB-PreamblesPerSSB-r16 CHOICE {	oneFourth, n48		
one	n4		FR2
}			
msgA-CB-PreamblesPerSSB-PerSharedRO-r16	oneFourth, n48		
msgA-SSB-SharedRO-MaskIndex-r16	Not present		
groupB-ConfiguredTwoStepRA-r16	Not present		
msgA-PRACH-RootSequenceIndex-r16 CHOICE {}	Not present		
msgA-TransMax-r16	N8		
msgA-RSRP-Threshold-r16	RSRP_69 +Δ_{DL}		
msgA-RSRP-ThresholdSSB-r16	RSRP_69 +Δ_{DL}		
msgA-SubcarrierSpacing-r16	120 kHz		
msgA-RestrictedSetConfig-r16	Not present		
ra-PrioritizationForAccessIdentityTwoStep-r16 SEQUENCE {			
ra-Prioritization-r16	RA-Prioritization		
ra-PrioritizationForAI-r16	'10'B		
}			
ra-ContentionResolutionTimer-r16	sf32		
}			

Table 7.3.2.2.3.4.3-3: RACH-ConfigGeneric for 2-step contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-130A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGenericTwoStepRA-r16 ::= SEQUENCE {			
msgA-PRACH-ConfigurationIndex-r16	190		

msgA-RO-FDM-r16	four		
msgA-RO-FrequencyStart-r16	0		
msgA-ZeroCorrelationZoneConfig-r16	11		
msgA-PreamblePowerRampingStep-r16	dB2		
msgA-PreambleReceivedTargetPower-r16	-100		
msgB-ResponseWindow-r16	sl10		
preambleTransMax-r16	n10		
}			

Table 7.3.2.2.3.4.3-4: *ServingCellConfigCommonSIB* for 2-step contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-169			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommonSIB ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	20 +Δ_{UL}	Δ_{UL} is derived from the uplink calibration process	
}			

Table 7.3.2.2.3.4.3-5: MsgA-PUSCH-Config for 2-step contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-81B			
Information Element	**Value/remark**	**Comment**	**Condition**
MsgA-PUSCH-Resource-r16 ::= SEQUENCE {			
msgA-MCS	1		
nrofSlotsMsgA-PUSCH	1		
nrofMsgA-PO-PerSlot	1		
msgA-PUSCH-TimeDomainOffset	1		
msgA-PUSCH-TimeDomainAllocation-r16	3	Equivalent to PUSCH start symbol = 0 and allocation length = 10	
mappingTypeMsgA-PUSCH	typeA		
nrofPRBs-PerMsgA-PO	2		
nrofMsgA-PO-FDM	One		
msgA-DMRS-AdditionalPosition	pos1		
msgA-PUSCH-NrofPorts	1		
msgA-DeltaPreamble	3		
msgA-Alpha	alpha1		
deltaMCS	Disabled		
}			

7.3.2.2.3.5 Test requirement

Table 7.3.2.2.3.5-2 defines the primary level settings for 2-step contention based random access test in FR2 for NR Standalone. Tables 7.3.2.2.3.5-3, 7.3.2.2.3.5-4 and 7.3.2.2.3.5-5 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances.

Table 7.3.2.2.3.5-1: General test parameters for 2-step contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 FR2	As defined in A.3.2
Duplex Mode for Cell 1	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	As defined in A.1.5
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OCNG pattern 1	As defined in A.2.1

PDSCH Reference Channel Note 2	Config 1		SR.3.1 TDD	As defined in A.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	As defined in A.1.2
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [13]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [3]
MsgA Configuration			FR2 MsgA configuration 1	As defined in A.7.2, with exceptions as defined below
msgA-RSRP-ThresholdSSB		dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [13]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(PMsgA0 -1), where PMsgA0 is the measured first MsgA PRACH power with -80.6dBm/SCS applied, *msgA-PreambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.

Note 4: The Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 7.3.2.2.3.5-2: OTA-related test parameters for 2-step contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 2b	As defined in A.9.2.2
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot$_{BB}$	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot$_{BB}$	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	

Note 1: No artificial noise is applied in this test.

Note 2: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

Note 3:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

Test 1: Correct behaviour when transmitting MsgA

- The MsgA with preamble shall be one of the Random Access Preambles associated with SSB index 0.

Test 2: Correct behaviour when receiving MsgB

- The power of the first MsgA PRACH preamble shall be 0.6 dBm within the accuracy specified in Table 7.3.2.2.3.5-3.

- The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [8], where μ indicates the MsgA PUSCH numerology.

- The relative power for MsgA ramping step shall be 2 dB within the accuracy specified in Table 7.3.2.2.3.5-4.

- The transmit timing of all MsgA transmissions shall be within the accuracy specified in Table 7.3.2.2.3.5-5.

Test 3: Correct behaviour when not receiving MsgB

- The power of the first MsgA PRACH preamble shall be 0.6 dBm within the accuracy specified in Table 7.3.2.2.3.5-3.

- The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [8], where μ indicates the MsgA PUSCH numerology.

- The relative power for MsgA ramping step shall be 2 dB within the accuracy specified in Table 7.3.2.2.3.5-4.

- The transmit timing of all MsgA transmissions shall be within the accuracy specified in Table 7.3.2.2.3.5-5.

Table 7.3.2.2.3.5-3: Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± FFS dB

Table 7.3.2.2.3.5-4: Relative power tolerance Test requirements

Measured power	Power step ΔP (dB)	MsgA (dB)
Measured power of both MsgAs being compared > (P_{max}^{Note1} – 6dB)	2 ≤ ΔP < 3	± (4+FFS).
Measured power of either MsgAs being compared ≤ (P_{max}^{Note1} – 6dB)		± (6+FFS)
Note 1: P_{max} is the Min peak EIRP defined in clause 6.2.1 of TS 38.101-2 [3], selected according to power class and operating band.		

Table 7.3.2.2.3.5-5: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
2	120	120	224+[48]*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

7.3.2.2.4 NR SA FR2 2-step non-contention based random access

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- The settable window for first preamble uplink power and the uplink calibration process are FFS.

- The test requirement for absolute uplink power is FFS.
- The test requirement for relative uplink power is FFS.
- The uncertainty value and test requirement for T_e Timing error are in [ ]
- TT analysis is missing
- Antenna diagram and any exceptions are FFS
- Connection setup in Annex C is FFS

7.3.2.2.4.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the MsgA PRACH and MsgA PUSCH power settings and timing are within specified limits.

7.3.2.2.4.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting twoStepRACH-r16.

7.3.2.2.4.3 Minimum conformance requirement

Same as in clause 4.3.2.2.4.3.

The normative reference for this requirement is TS 38.133 [6] clause 6.2.2 and A.7.3.2.2.4.

7.3.2.2.4.4 Test description

7.3.2.2.4.4.1 Initial conditions

This test can be run in the configurations defined in Table 7.3.2.2.4.4.1-1.

Table 7.3.2.2.4.4.1-1: 2-step non-contention based random access test in FR2 for NR standalone supported test configurations

Test Case ID	Test Config Index	Description
7.3.2.2.4-1	1	NR: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability		

Before the test procedure, Downlink and Uplink calibrations are carried out to derive signalled parameter values. This is necessary to ensure that the test case operates within the specified ranges. The detail of the calibration process is implementation dependent, but shall derive the values of Δ_{DL} and Δ_{UL} according to the following principles:

With the UE configured to report SS-RSRP, the Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value according to TS 38.133 [6] Table 10.1.6.1-1 with -80.6dBm/SCS applied at the Reference point. For a Reported value RSRP_x, x is treated as a positive integer value.

With the UE configured to send a first PRACH preamble, Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied at the Reference point, and with signalled values *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm.

Configure the test equipment and the DUT according to the parameters in Table 7.3.2.2.4.4.1-2.

Table 7.3.2.2.4.4.1-2: Test Environment for 2-step RACH non-dsscontention based random access test in FR2 for NR standalone

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.2.2.4.4.1-1.		
Propagation conditions	No interference		As specified in Annex C.2.1.
	TE Part	FFS	As specified in TS 38.508-1 [14] Annex A.

Connection Diagram	DUT Part	FFS	
Exceptions to connection diagram	FFS		

1. Message contents are defined in clause 7.3.2.2.4.4.3.
2. Cell 1 is the NR FR2 serving cell (PCell). The connection setup is done according to the settings in FFS.

7.3.2.2.4.4.2 Test procedure

The test consists of a single cell, configured as PCell in FR2. The System Simulator shall explicitly assign a random access preamble via dedicated signalling in the downlink.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity *NR* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 7.3.2.2.4.5-1 and 7.3.2.2.4.5-2.
3. The UE shall establish a connection setup with SS, the random access procedure within the connection setup is used in the test.
4. Test 1: Correct behaviour when transmitting MsgA:
   4.1. The UE shall send the MsgA PRACH and MsgA PUSCH to the System Simulator with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*. The UE shall send the MsgA PUSCH on the MsgA PUSCH occasion that is associated with the chosen preamble.
5. Test 2: Correct behaviour when receiving MsgB:
   5.1. Repeat steps 1-3.
   5.2. The UE shall send preambles to the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB containing identifiers that do not match the transmitted Random Access Preamble.
   5.3. As the received MsgB contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.
   5.4. The System Simulator shall transmit a MsgB containing containing fallbackRAR with a Random Access Preamble identifier matching the transmitted Random Access Preamble after 3 MsgA transmissions have been received by the System Simulator.
   5.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for MsgB(s) and shall transmit the msg3 on the indicated PUSCH resources.
   5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 7.3.2.2.4.5. Measure the relative power and timing applied to additional preambles (last 2 preambles) and it shall not exceed the values specified in clause 7.3.2.2.4.5.
6. Test 3: Correct behaviour when not receiving MsgB:
   6.1. Repeat steps 1-3.
   6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 2 preambles.
   6.3. The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [20], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power

when the backoff time expires if no MsgB is received within the MsgB Response window in RACH-ConfigGenericTwoStepRA.

6.4. Measure the power and timing of the first preamble and it shall not exceed the values specified in 7.3.2.2.4.5. Measure the relative power and timing applied to additional preambles (last 2 preambles) and it shall not exceed the values specified in 7.3.2.2.4.5.

7.3.2.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.3.2.2.4.4.3-1: *FrequencyInfoUL-SIB* for 2-step non-contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-62			
Information Element	**Value/remark**	**Comment**	**Condition**
FrequencyInfoUL-SIB SEQUENCE {			
p-Max	23	23 dBm	
}			

Table 7.3.2.2.4.4.3-2: RACH-ConfigCommon for 2-step non-contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-128A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommonTwoStepRA-r16 ::= SEQUENCE {			
rach-ConfigGenericTwoStepRA-r16	RACH-ConfigGenericTwoStepRA		
msgA-TotalNumberOfRA-Preambles-r16	48		
msgA-SSB-SharedRO-MaskIndex-r16	Not present		
groupB-ConfiguredTwoStepRA-r16	Not present		
msgA-PRACH-RootSequenceIndex-r16 CHOICE {}	Not present		
msgA-TransMax-r16	N8		
msgA-RSRP-Threshold-r16	RSRP_69 +Δ_{DL}		
msgA-RSRP-ThresholdSSB-r16	RSRP_69 +Δ_{DL}		
msgA-SubcarrierSpacing-r16	120 kHz		
msgA-RestrictedSetConfig-r16	Not present		
ra-PrioritizationForAccessIdentityTwoStep-r16 SEQUENCE {			
ra-Prioritization-r16	RA-Prioritization		
ra-PrioritizationForAI-r16	'10'B		
}			
ra-ContentionResolutionTimer-r16	Not present		
}			

Table 7.3.2.2.2.4.3-3: RACH-ConfigDedicated for Non-Contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	2 entries		
ssb[1]	0		
ssb[2]	1		
ra-PreambleIndex[1]	50		Subtest 1
}			
ra-ssb-OccasionMaskIndex	1		Subtest 1

}			
csirs SEQUENCE {			
csirs-ResourceList SEQUENCE (SIZE(1..maxRA- CSIRS -Resources)) OF {			
ra-OccasionList	1		Subtest 2
ra-PreambleIndex[1]	50		Subtest 2
}			
rsrp-ThresholdCSI-RS	RSRP_69 +Δ_{DL}	Δ_{DL} is derived from the downlink calibration process	Subtest 2
}			
}			
}			
}			

Table 7.3.2.2.4.4.3-3: RACH-ConfigGeneric for 2-step non-contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-130A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGenericTwoStepRA-r16 ::= SEQUENCE {			
msgA-PRACH-ConfigurationIndex-r16	190		
msgA-RO-FDM-r16	four		
msgA-RO-FrequencyStart-r16	0		
msgA-ZeroCorrelationZoneConfig-r16	11		
msgA-PreamblePowerRampingStep-r16	dB2		
msgA-PreambleReceivedTargetPower-r16	-100		
msgB-ResponseWindow-r16	sl10		
preambleTransMax-r16	n10		
}			

Table 7.3.2.2.4.4.3-4: *ServingCellConfigCommonSIB* for 2-step non-contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-169			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommonSIB ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	20 +Δ_{UL}	Δ_{UL} is derived from the uplink calibration process	
}			

Table 7.3.2.2.4.4.3-5: MsgA-PUSCH-Config for 2-step non-contention Based Random Access

Derivation Path: TS 38.508-1 [14], table 4.6.3-81B			
Information Element	**Value/remark**	**Comment**	**Condition**
MsgA-PUSCH-Resource-r16 ::= SEQUENCE {			
msgA-MCS	1		
nrofSlotsMsgA-PUSCH	1		
nrofMsgA-PO-PerSlot	1		
msgA-PUSCH-TimeDomainOffset	1		
msgA-PUSCH-TimeDomainAllocation-r16	3	Equivalent to PUSCH start symbol = 0 and allocation length = 10	
mappingTypeMsgA-PUSCH	typeA		
nrofPRBs-PerMsgA-PO	2		

nrofMsgA-PO-FDM	One		
msgA-DMRS-AdditionalPosition	pos1		
msgA-PUSCH-NrofPorts	1		
msgA-DeltaPreamble	3		
msgA-Alpha	alpha1		
deltaMCS	Disabled		
}			

7.3.2.2.4.5 Test requirement

Table 7.3.2.2.4.5-2 defines the primary level settings for 2-step non-contention based random access test in FR2 for NR Standalone. Tables 7.3.2.2.4.5-3, 7.3.2.2.4.5-4 and 7.3.2.2.4.5-5 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances.

Table 7.3.2.2.4.5-1: General test parameters for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 FR2	As defined in A.3.10
Duplex Mode for Cell 1	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1			OP.3	As defined in A.3.2.1.
PDSCH Reference Channel Note 2	Config 1		SR3.1 TDD	As defined in A.3.1.1.
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,f,c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration			FR2 MsgA configuration 2	As defined in A.3.20.3, with exceptions as defined below.
msgA-RSRP-ThresholdSSB		dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
msgA-PreambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(P_{MsgA0} -1), where P_{MsgA0} is the measured first MsgA PRACH power with -80.6dBm/SCS applied, *msgA-PreambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.

Note 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 7.3.2.2.4.5-2 OTA-related test parameters for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.9.1
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	

Note 1: No artificial noise is applied in this test.

Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

Test 1: Correct behaviour when transmitting MsgA

- The MsgA with preamble shall be one of the Random Access Preambles associated with SSB index 0.

Test 2: Correct behaviour when receiving MsgB

- The power of the first MsgA PRACH preamble shall be 0.6 dBm within the accuracy specified in Table 7.3.2.2.4.5-3.

- The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [8], where μ indicates the MsgA PUSCH numerology.

- The relative power for MsgA ramping step shall be 2 dB within the accuracy specified in Table 7.3.2.2.4.5-4.

- The transmit timing of all MsgA transmissions shall be within the accuracy specified in Table 7.3.2.2.4.5-5.

Test 3: Correct behaviour when not receiving MsgB

- The power of the first MsgA PRACH preamble shall be 0.6 dBm within the accuracy specified in Table 7.3.2.2.4.5-3.

- The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [8], where μ indicates the MsgA PUSCH numerology.

- The relative power for MsgA ramping step shall be 2 dB within the accuracy specified in Table 7.3.2.2.4.5-4.

- The transmit timing of all MsgA transmissions shall be within the accuracy specified in Table 7.3.2.2.4.5-5.

Table 7.3.2.2.4.5-3: Absolute power tolerance Test requirements

Conditions	Tolerance

Normal	± FFS dB

Table 7.3.2.2.4.5-4: Relative power tolerance Test requirements

Measured power	Power step ΔP (dB)	MsgA (dB)
Measured power of both MsgAs being compared > (P_{max}^{Note1} – 6dB)	2 ≤ ΔP < 3	± (4+FFS).
Measured power of either MsgAs being compared ≤ (P_{max}^{Note1} – 6dB)		± (6+FFS)
Note 1: P_{max} is the Min peak EIRP defined in clause 6.2.1 of TS 38.101-2 [3], selected according to power class and operating band.		

Table 7.3.2.2.4.5-5: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
2	120	120	224+[48]*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

7.3.2.3 RRC connection release with redirection

7.3.2.3.0 Minimum conformance requirements

7.3.2.3.0.1 Minimum conformance requirements for FR2-FR2 RRC connection release with redirection

The UE shall be capable of performing the RRC connection release with redirection to the target NR cell within $T_{connection_release_redirect_NR}$.

The time delay ($T_{connection_release_redirect_NR}$) is the time between the end of the last slot containing the RRC command, "*RRCRelease*" (TS 38.331 [13]) on the NR PDSCH and the time the UE starts to send random access to the target NR cell. The time delay ($T_{connection_release_redirect_NR}$) shall be less than:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH}$$

The target NR cell shall be considered detectable when for each relevant SSB, the side conditions should be met that,

- SSB_RP and SSB Ês/Iot according to 38.133 [6] Annex B.2.5 for a corresponding NR Band.

$T_{RRC_procedure_delay}$: It is the RRC procedure delay for processing the received message "*RRCRelease*" as defined in clause 6.2.2 of TS 38.331 [13].

$T_{identify\text{-}NR}$: It is the time to identify the target NR cell and depend on the frequency range (FR) of the target NR cell. It is defined in table 7.3.2.3.0.1-1. Note that $T_{identify\text{-}NR} = T_{PSS/SSS\text{-}sync} + T_{meas}$, in which $T_{PSS/SSS\text{-}sync}$ is the cell search time and T_{meas} is the measurement time due to cell selection criteria evaluation.

$T_{SI\text{-}NR}$: It is the time required for acquiring all the relevant system information of the target NR cell. This time depends upon whether the UE is provided with the relevant system information of the target NR cell or not by the old NR cell before the RRC connection is released. $T_{SI\text{-}NR}$ = 0 provided the UE is provided with the SI (including MIB and all relevant SIBs) of the target NR cell before the RRC connection is released by the old NR cell.

T_{RACH}: It is the delay caused due to the random access procedure when sending random access to the target NR cell. This delay depends on the PRACH configuration defined in TS 38.211 [7] Table 6.3.3.2-4 for FR2.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the redirection command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing configured for the RRC connection release with redirection. If the UE is not provided with SMTC configuration or measurement object for the frequency which is also configured for the RRC connection release with redirection then:

- the requirement in this section is applied with T_{rs} = 20 ms assuming the SSB transmission periodicity is not larger than 20 ms,

- there is no requirement if the SSB transmission periodicity is larger than 20ms.

Table 7.3.2.3.0.1-1: Time to identify target NR cell for RRC connection release with redirection to NR

Frequency range (FR) of target NR cell	$T_{identify-NR}$
FR1	MAX (680 ms, [11] x T_{rs})
FR2	MAX (880 ms, 8x[11] x T_{rs})
Note : If the UE has been provided with higher layer in TS 38.331 [13] signalling of *smtc2* prior to the redirection command, SMTC follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.	

The normative reference for this requirement is TS 38.133 [6] clause 6.2.3.2.1.

7.3.2.3.1 NR SA FR2-FR2 RRC connection release with redirection

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.3.2.3.1.1 Test purpose

This test is to verify RRC connection release with redirection from NR-to-NR requirements specified in clause 7.2.3.2.0.

7.3.2.3.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting SA FR2.

7.3.2.3.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.3.2.3.0.1.

The normative reference for this requirement is TS 38.133 [6] A.7.3.2.3.1.

7.3.2.3.1.4 Test description

7.3.2.3.1.4.1 Initial conditions

This test can be run in the configurations defined in Table 7.3.2.3.1.4.1-1.

Table 7.3.2.3.1.4.1-1: Test configurations for NR SA FR2-FR2 RRC connection release with redirection

Configuration	Description
7.3.2.3.1-1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.3.2.3.1.4.1-2.

Table 7.3.2.3.1.4.1-2: Initial conditions for NR SA FR2-FR2 RRC connection release with redirection

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.5 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.2.3.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.

Connection Diagram	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.2.3.1.4.3.
2. The power levels and settings for NR FR2 Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.3.2.3.1.4.1-3.

Table 7.3.2.3.1.4.1-3: General test parameters for NR SA FR2-FR2 RRC connection release with redirection

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 µs	Synchronous cells
T1		s	5	
T2		s	3.2	

7.3.2.3.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant in which the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.
2. Set the parameters according to T1 in Table 7.3.2.3.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.
3. SS shall transmit an *RRCRelease* during period T1.
4. The SS shall switch the power setting from T1 to T2 as specified in Table 7.3.2.3.1.5-1. When the last TTI containing the *RRCRelease* message is sent to UE, T2 starts.
5. If the UE transmits the PRACH to Cell 2 less than 3160 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
6. After T2 expires, the UE shall be switched off. The SS shall then set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for the next iteration of the test procedure loop. Afterwards the UE shall be switched on. Go to step 1.
7. Repeat step 2-6 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

7.3.2.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.3.2.3.1.4.3-1: RRCRelease (step 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**

RRCRelease ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcRelease SEQUENCE {			
redirectedCarrierInfo CHOICE {			
nr SEQUENCE {			
carrierFreq	ARFCN-ValueNR	Frequency of Cell 2	
ssbSubcarrierSpacing	kHz120		
smtc SEQUENCE {			
duration	sf1		SMTC.1
}			
}			
}			
}			
}			
}			

Table 7.3.2.3.1.4.3-2: SIB2

Derivation Path: TS 38.508-1 [14], Table 4.6.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionInfoCommon SEQUENCE {			
rangeToBestCell	Not present		
}			

7.3.2.3.1.5 Test requirement

Table 7.3.2.3.1.5-1 defines the primary level settings for NR SA FR2-FR2 RRC connection release with redirection.

Table 7.3.2.3.1.5-1: Cell specific test parameters for NR SA FR2-FR2 RRC connection release with redirection

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]			Rough		Rough	
AoA setup			Setup 1 as defined in A.9			
NR RF Channel Number			1		2	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR.3.1 TDD			
RMSI CORESET Reference Channel			CR.3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			OP.1			
SMTC configuration			SMTC.1			
SSB Configuration			SSB.3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			PRACH.1 FR2			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						

EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7		-104.7	
N_{oc} Note2		dBm/SCS	-95.7		-95.7	
$\hat{E}_s/I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s/N_{oc}$		dB	5	5	-Infinity	5
Io Note3		dBm/BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone Note 6: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation						

The UE shall start to transmit the PRACH to Cell 2 less than 3160 ms from the beginning of time period T2.

The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR} = T_{RRC_procedure_delay} + T_{identify\text{-}NR} + T_{SI\text{-}NR} + T_{RACH},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}NR}$ = 1760 ms in the test.

$T_{SI\text{-}NR}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 [13] for the target NR cell.

T_{RACH} = 10 ms in the test.

This gives a total of 3160 ms.

7.3.3 Conditional handover

7.3.3.0 Minimum conformance requirements

7.3.3.0.1 Minimum conformance requirements for NR FR2 intra-frequency conditional handover

[TS 38.133, clause 6.1.4.4.1]

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [13].

When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ seconds from the end of the last TTI containing the RRC command.

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

Where:

T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover.

$T_{measure}$ is the measurements time stated in TS 38.133 [6] clause 6.1.4.4.2.

$T_{CHO_execution}$ is the conditional execution preparation time in TS 38.133 [6] clause 6.1.4.4.3.

$T_{interrupt}$ is the interruption time stated in TS 38.133 [6] clause 6.1.4.4.4.

The NES-based conditional handover delay requirements shall apply if UE receives a RRC message implying conditional handover before receiving the NES indication in DCI 2-9 command.,

UE is not expected to receive a NES indication in DCI 2-9 command before receiving a RRC message implying NES-based conditional handover. When UE receives a RRC message implying NES-based conditional handover but no NES indication in DCI 2-9 command, no NES-based conditional handover requirement is applied. The NES indication is specified in clause [5.5.4] in TS 38.331[13].

[TS 38.133, clause 6.1.4.4.2]

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a handover to a target cell and interruption time starts.

For conditional intra-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify_intra_without_index}$ defined in TS 38.133 [6] clause 9.2.5.1 or clause 9.2.6.2.

For conditional inter-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$ defined in TS 38.133 [6] clause 9.3.4 or clause 9.3.9..

For NES-based conditional intra-frequency handover:

- If UE successfully decodes DCI 2-9 command occurs earlier than the time at the end of T_{Event_DU} + $T_{identify_intra_with_index}$ or T_{Event_DU} + $T_{identify_intra_without_index}$, then the measurement time delay equal to $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$
- If UE successfully decodes DCI 2-9 command occurs later than the time at the end of T_{Event_DU} + $T_{identify_intra_with_index}$ or T_{Event_DU} + $T_{identify_intra_without_index}$, then the measurement time delay equals to the time from the end of T_{event_DU} until UE successfully decodes DCI 2-9 command.

For NES-based conditional inter-frequency handover:

- If UE successfully decodes DCI 2-9 command occurs earlier than the time at the end of T_{Event_DU} + $T_{identify_inter_with_index}$ or T_{Event_DU} + $T_{identify_inter_without_index}$, then the measurement time delay equal to $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$
- If UE successfully decodes DCI 2-9 command occurs later than the time at the end of T_{Event_DU} + $T_{identify_inter_with_index}$ or T_{Event_DU} + $T_{identify_inter_without_index}$, then the measurement time delay equals to the time from the end of T_{event_DU} until UE successfully decodes DCI 2-9 command.

When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover. If a cell which has been detectable at least for the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover becomes undetectable for a period and then the cell becomes detectable again and triggers a handover, the measurement time delay shall be less than $T_{SSB_measurement_period_intra}$ or $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than ± 3200 Tc while the measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

[TS 38.133, clause 6.1.4.4.3]

$T_{CHO_execution}$ is the UE execution preparation time for conditional handover.

For conditional handover, it starts after UE realizes the condition of CHO is met and identity of the target cell is determined.

For NES-based conditional handover,

- It starts after UE realizes the condition of CHO is met and identity of the target cell is determined provided that UE has already successfully decoded DCI 2-9.
- Otherwise, it starts after UE successfully decodes DCI 2-9.

And $T_{CHO_execution}$ can be up to 10ms.

[TS 38.133, clause 6.1.4.4.4]

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional conditional handover, the measurment time shall be less than

$$T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [8]

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cellin the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [13] signalling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

7.3.3.0.2 Minimum conformance requirements for NR FR2 inter-frequency conditional handover

Same as 7.3.3.0.1.

7.3.3.0.3 Minimum conformance requirements for NR FR2 – NR FR1 inter-frequency conditional handover

The requirements defined in clause 6.3.3.0.2 applies assuming inter-frequency handover and:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 40ms.

7.3.3.0.4 Minimum conformance requirements for NR-DC conditional handover including target MCG and target SCG

[TS 38.133, clause 6.1.6.2]

The requirements in this clause are applicable to conditional handover with target SCG from NR-DC to NR-DC. The requirements in this clause are only applicable to:

- FR1-FR2 NR-DC to FR1-FR2 NR-DC.

This clause defines requirements for the delay within which the UE shall be able to handover from NR cell to NR cell and change NR PSCell in the meantime.

When the UE receives a RRC message implying conditional handover including target MCG in FR1 and target SCG in FR2,

- The UE shall be ready to start the transmission of the new uplink PRACH channel of the target PCell within $D_{CHOwithPSCell_PCell}$ ms from the end of the last TTI containing the RRC command, and

- The UE shall be capable of transmitting PRACH preamble towards the target PSCell no later than $D_{CHOwithPSCell_PSCell}$ ms from the end of the last TTI containing the RRC command.

Where:

- $D_{CHOwithPSCell_PCell}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [13] plus the interruption time stated in clause 6.1.6.2.1 in TS 38.133 [6].

- $D_{CHOwithPSCell_PSCell}$ is the PSCell change in clause 6.1.6.2.2 in TS 38.133 [6]

[TS 38.133, clause 6.1.6.2.1] CHO with PSCell – PCell handover delay

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [13].

When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel of the target PCell within $D_{CHOwithPSCell_PCell}$ seconds from the end of the last TTI containing the RRC command.

$D_{CHOwithPSCell_PCell} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{processing} + T_{IU} + T_{\Delta} + T_{margin} + T_{CHO_execution}$

Where:

T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover.

$T_{measure}$ is the measurement time stated in clause 6.1.4.2.2 in TS 38.133 [6].

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period.

For FR1-FR2 NR-DC to FR1-FR2 NR-DC, Tprocessing = 30 ms if SMTC of the target unknown PSCell is configured in *targetcellSMTC-SCG-r16* but not configured in *reconfigurationWithSync*. Otherwise, Tprocessing = 25 ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell stated in clause 6.1.4.2.4 in TS 38.133 [6].

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell stated in clause 6.1.4.2.4 in TS 38.133 [6].

T_{margin} is time for SSB post-processing stated in clause 6.1.4.2.4 in TS 38.133 [6].

$T_{CHO_execution}$ is the conditional execution preparation time in clause 6.1.4.2.3 in TS 38.133 [6].

[38.133, clause 6.1.6.2.2] CHO with PSCell – PSCell change delay

The requirements in this section shall apply for PSCell change during handover with PSCell from NR DC to NR-DC.

When handover with PSCell from NR-DC to NR-DC is commanded, the PSCell change time shall be less than $D_{HOwithPSCell_PSCell}$:

- $D_{CHOwithPSCell_PSCell} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{CHO_execution} + T_{processing} + T_{search_PCell_Conditional} + T_{search_PSCell} + T_{\Delta_PSCell} + T_{PSCell_DU} + 2$ ms

Where:

- T_{RRC_delay} T_{Event_DU} $T_{measure}$ $T_{CHO_execution}$ are the same as defined in clause 6.1.6.2.1 in TS 38.133 [6]. T_{search_PSCell}, T_{Δ_PSCell} and T_{PSCell_DU} are the same as defined in clause 6.1.5.4.2 in TS 38.133 [6].

- $T_{processing}$ is the SW processing time needed by UE, including RF warm up period.

For FR1-FR2 NR-DC to FR1-FR2 NR-DC, Tprocessing = 30 ms if SMTC of the target unknown PSCell is configured in *targetcellSMTC-SCG-r16* but not configured in *reconfigurationWithSync*. Otherwise, Tprocessing = 25 ms.

- $T_{search_PCell_Conditional}$ is the time for obtaining the timing reference of target PCell. If SMTC of the target unknown PSCell is configured in *targetcellSMTC-SCG-r16* but not configured in *reconfigurationWithSync*, $T_{search_PCell_Conditional} = T_{\Delta} + T_{margin}$, where T_{Δ} and T_{margin} are specified in clause 6.1.5.4.1 in TS 38.133 [6]. Otherwise, $T_{search_PCell_Conditional} = 0$ ms.

The T_{rs} definition from clause 8.9.2 in TS 38.133 [6] is modified as following for requirements in this section:

- T_{rs} is the SMTC periodicity of the target NR cell if target PSCell is unknown and SMTC configuration of target unknown PSCell is present in either *targetcellSMTC-SCG-r16* or *reconfigurationWithSync*, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, Trs is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this section is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

PSCell known and unknown condition is as defined in clause 8.9.2 in TS 38.133 [6].

7.3.3.1 NR SA FR2 conditional handover

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

7.3.3.1.1 Test purpose

To verify the requirement for the NR FR2 intra frequency conditional handover requirements specified in 38.133 [6] clause 6.1.4.4.

7.3.3.1.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and supporting conditional handover.

7.3.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.3.1.

7.3.3.1.4 Test description

7.3.3.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.3.1.4.1-1.

Table 7.3.3.1.4.1-1: NR SA FR2 conditional handover test configurations

Config	Description
7.3.3.1-1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.3.3.1.4.1-2

Table 7.3.3.1.4.1-2: Initial conditions for NR SA FR2 conditional handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.3.1.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.3.3.1.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 7.3.3.1.4.1-3: General test parameters for NR SA FR2 conditional handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset for condition		dBm	-2 Note 1	Trigger HO to cell which may be measured as -1dB relative to cell 1. Actual SS-RSRP is 5dB stronger.
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤2	
Note 1: Including test tolerance given in Annex F.1.3.2				

7.3.3.1.4.2 Test procedure

The test scenario comprises of 1 NR carrier and two cells, Cell 1 and Cell 2, on this carrier. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 7.3.3.1.4.1-3 and 7.3.3.1.5-1 respectively. No measurement gap is configured in the test case.

The test consists of two successive time periods, with time durations of T1 and T2 respectively.

At the start of time duration T1, the UE may not have any timing information of cell 2. The UE is configured with a condition implying handover to Cell 2 at a time earlier than T_{RRC} ms before the beginning of T2. No interruption shall be observed in time period T1. where,

- T_{RRC} = 10ms, is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

From start of T2, the Cell 2 becomes detectable and handover condition is satisfied. During T2, the UE performs measurement on Cell 2 and evaluates the execution condition, and starts handover procedure when execution condition is satisifed. The UE shall sent PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the start of T2. The Interruption length $T_{interrupt}$ shall also be verified in T2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 7.3.3.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure CHO execution condition for the UE.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.3.3.1.5-1. T2 starts.

7. If

   a) the UE transmits the PRACH preambles to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the beginning of time period T2,

   and

   b) no longer than X consecutive ACK/NACK DTXs are observed by the SS from the start of T2 to the instant the UE transmits the first PRACH preamble, where

   - $X = 8 \cdot T_{interrupt}$ for test configuration 7.3.3.1-1

   then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

9. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.3.3.1.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 7.3.3.1.4.3-2	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
conditionalReconfiguration-r16	ConditionalReconfiguration	Table 7.3.3.1.4.3-5	
}			
}			
}			
}			
}			
}			
}			

Table 7.3.3.1.4.3-2: MeasConfig (Table 7.3.3.1.4.3-1)

Derivation Path: Table H.3.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofObjectId)) OF MeasObjectToAddMod {	1 entry		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR	Table 7.3.3.1.4.3-3	
}			
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 7.3.3.1.4.3-4	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	1 entry		
MeasIdToAddMod[1] SEQUENCE {			
measId	1		
measObjectId	1		
reportConfigId	1		
}			
}			
quantityConfig	QuantityConfig specified in Table H.3.1-5		
}			

Table 7.3.3.1.4.3-3: MeasObjectNR (Table 7.3.3.1.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR for PCell		
smtc1	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 7.3.3.1.4.3-4: ReportConfigNR (Table 7.3.3.1.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			

condTriggerConfig SEQUENCE {			
condEventId CHOICE {			
condEventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-4	actuall value = -4*0.5 = -2dB	
}			
hysteresis	0	actuall value = 0*0.5 = 0dB	
timeToTrigger	ms0		
}			
}			
}			
}			
}			

Table 7.3.3.1.4.3-5: ConditionalReconfiguration (Table 7.3.3.1.4.3-1)

Derivation Path: TS 38.508-1[14], Table 4.6.3-25D			
Information Element	**Value/remark**	**Comment**	**Condition**
ConditionalReconfiguration-r16::= SEQUENCE {			
condReconfigToAddModList-r16 SEQUENCE (SIZE (1.. maxNrofCondCells-r16)) OF CondReconfigToAddMod-r16 {	1 entry		
CondReconfigToAddMod-r16 [1] SEQUENCE {		entry 1	
condReconfigId-r16	1		
condExecutionCond-r16 SEQUENCE (SIZE (1..2)) OF MeasId {	1 entry		
MeasId[1]	1	The MeasId configured in Table 7.3.3.1.4.3-2	
}			
condRRCReconfig-r16	OCTET STRING (CONTAINING RRCReconfiguration Specified in Table 4.8.1-1A with condition RBConfig_NoKeyChange)		
}			
}			
}			

7.3.3.1.5 Test requirements

Table 7.3.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.3.1.5-1: Cell specific test parameters for NR SA FR2 conditional handover

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
NR RF Channel Number		1		1	
AoA setup		Setup 1 as defined in A.9			
Assumption for UE beams[Note 6]		Rough			
Duplex mode		TDD			
TDD configuration		TDDConf.3.1			
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			
BWP BW	MHz	100: $N_{RB,c}$ = 66			
DRx Cycle	ms	Not Applicable			
PDSCH Reference measurement channel		SR3.1 TDD			
CORESET Reference Channel		CR3.1 TDD			
OCNG Patterns		OCNG pattern 1			
SMTC Configuration		SMTC pattern 1			

SSB Configuration			SSB.1 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
TCI configuration			CSI-RS.Config.0			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-106.2 Note 7		-106.2 Note 7	
N_{oc} Note2	Config 1	dBm/SCS	-97.2		-97.2	
$\hat{E}s/Iot_{BB}$ Note9		dB	4.69	-5.44	-Infinity	3.73
$\hat{E}_s / N_{oc}$		dB	6	6	-Infinity	11
Io Note3	Config 1	dBm/BW	-61.21	-55.73	-61.21	-55.73
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7: Including test tolerance given in Annex F.1.3.2.
Note 8: Es/Iot, SSB_RP and Io levels have been derived from other parameters for infomation purposes. They are not settable parameters themseleves.
Note 9: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated REFSENS requirement in TS 38.101-2 [3] clause 7.3.2, and an allowance of 1dB for UE multi-band relaxation factor Δ_{MBS} specified in TS 38.101-2 [3] Table 6.2.1.3-4.

The rate of correct handovers observed during repeated tests shall be at least 90%.

The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ from the start of T2. where:

- $T_{measure}$ = 1600 ms for power class 1 UE and 1080ms for power class 2/3/4 UE, is the measurements time specified in 38.133 [6] clause 6.1.4.2.2.
- $T_{CHO_execution}$ = 10 ms, is the conditional execution preparation time specified in 38.133 [6] clause 6.1.4.2.2.
- $T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin}$ ms, is the interruption time specified in 38.133 [6] 6.1.4.2.4.
  - $T_{processing}$ = 20 ms, is time for UE processing;
  - T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell;
  - T_{Δ} = 20 ms, is time for fine time tracking and acquiring full timing information of the target cell;

- T_{margin} = 2 ms, is time for SSB post-processing.

This gives a total of 1672 ms for power class 1 UE and 1152 ms for power class 2/3/4 UE.
The interruption during T2 shall not exceed $T_{interrupt}$ = 62ms.

7.3.3.2 NR SA FR2-FR2 conditional handover

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Some test parameters are still FFS

7.3.3.2.1 Test purpose

To verify the requirement for the NR FR2 inter-frequency conditional handover requirements specified in 38.133 [6] clause 6.1.4.4.

7.3.3.2.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and supporting conditional handover.

7.3.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.3.2.

7.3.3.2.4 Test description

7.3.3.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.3.2.4.1-1.

Table 7.3.3.2.4.1-1: NR SA FR2-FR2 conditional handover test configurations

Config	Description
7.3.3.2-1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.3.3.2.4.1-2

Table 7.3.3.2.4.1-2: Initial conditions for NR SA FR2-FR2 conditional handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.3.2.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Table 7.3.3.2.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 7.3.3.2.4.1-3: General test parameters for NR SA FR2-FR2 conditional handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset for handover condition		dB	FFS	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤7	

7.3.3.2.4.2 Test procedure

The test scenario comprises of 2 NR carriers and two cells, Cell 1 and Cell 2, on each carrier respectively. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 7.3.3.2.4.1-3 and 7.3.3.2.5-1 respectively. Measurement gap (gap pattern #0) is configured in the test case.

The test consists of two successive time periods, with time durations of T1 and T2 respectively.

At the start of time duration T1, the UE may not have any timing information of cell 2. The UE is configured with a condition implying handover to Cell 2 at a time earlier than T_{RRC} ms before the beginning of T2. No interruption shall be observed in time period T1. where,

- T_{RRC} = 10ms, is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

From start of T2, the Cell 2 becomes detectable and handover condition is satisfied. During T2, the UE performs measurement on Cell 2 and evaluates the execution condition, and starts handover procedure when execution condition is satisifed. The UE shall sent PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the start of T2. The Interruption length $T_{interrupt}$ shall also be verified in T2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 7.3.3.2.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure CHO execution condition and measurement gap pattern #0 for the UE.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.3.3.2.5-1. T2 starts.

7. If

   c) the UE transmits the PRACH preambles to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the beginning of time period T2,

   and

   d) no longer than X consecutive ACK/NACK DTXs are observed by the SS from the start of T2 to the instant the UE transmits the first PRACH preamble, where

   - $X = 8 \cdot T_{interrupt}$ for test configuration 7.3.3.2-1

then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

9. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.3.3.2.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 7.3.3.2.4.3-2	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
conditionalReconfiguration-r16	ConditionalReconfiguration	Table 7.3.3.2.4.3-6	
}			
}			
}			
}			
}			
}			
}			

Table 7.3.3.2.4.3-2: MeasConfig (Table 7.3.3.2.4.3-1)

Derivation Path: Table H.3.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofObjectId)) OF MeasObjectToAddMod {	2 entry		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR-f1	Table 7.3.3.2.4.3-3	
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		entry 2	
measObjectId	2		
measObject CHOICE {			
measObjectNR	MeasObjectNR-f2	Table 7.3.3.2.4.3-4	
}			
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		

reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 7.3.3.2.4.3-5	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	1 entry		
MeasIdToAddMod[1] SEQUENCE {			
measId	1		
measObjectId	2		
reportConfigId	1		
}			
}			
measGapConfig	MeasGapConfig specified in Table H.3.1-6 with condition gapUE and Pattern #0		
quantityConfig	QuantityConfig specified in Table H.3.1-5		
}			

Table 7.3.3.2.4.3-3: MeasObjectNR-f1 (Table 7.3.3.2.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR for Cell 1		
smtc1	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 7.3.3.2.4.3-4: MeasObjectNR-f2 (Table 7.3.3.2.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR for Cell 2		
smtc1	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 7.3.3.2.4.3-5: ReportConfigNR (Table 7.3.3.2.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			

reportType CHOICE {			
condTriggerConfig SEQUENCE {			
condEventId CHOICE {			
condEventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	FFS		
}			
hysteresis	0	actuall value = 0*0.5 = 0dB	
timeToTrigger	ms0		
}			
}			
}			
}			
}			

Table 7.3.3.2.4.3-6: ConditionalReconfiguration (Table 7.3.3.2.4.3-1)

Derivation Path: TS 38.508-1[14], Table 4.6.3-25D			
Information Element	**Value/remark**	**Comment**	**Condition**
ConditionalReconfiguration-r16::= SEQUENCE {			
condReconfigToAddModList-r16 SEQUENCE (SIZE (1.. maxNrofCondCells-r16)) OF CondReconfigToAddMod-r16 {	1 entry		
CondReconfigToAddMod-r16 [1] SEQUENCE {		entry 1	
condReconfigId-r16	1		
condExecutionCond-r16 SEQUENCE (SIZE (1..2)) OF MeasId {	1 entry		
MeasId[1]	1	The MeasId configured in Table 7.3.3.2.4.3-2	
}			
condRRCReconfig-r16	OCTET STRING (CONTAINING RRCReconfiguration Specified in Table 4.8.1-1A with condition RBConfig_NoKeyChange)		
}			
}			
}			

7.3.3.2.5 Test requirements

Table 7.3.3.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.3.2.5-1: Cell specific test parameters for NR SA FR2-FR2 conditional handover

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
NR RF Channel Number		1		2	
AoA setup		Setup 1 as defined in A.9			
Assumption for UE beams[Note 6]		Rough			
Duplex mode		TDD			
TDD configuration		TDDConf.3.1			
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			
BWP BW	MHz	100: $N_{RB,c}$ = 66			
DRx Cycle	ms	Not Applicable			
Gap pattern ID		gp0			
PDSCH Reference measurement channel		SR3.1 TDD			
CORESET Reference Channel		CR3.1 TDD			
OCNG Patterns		OCNG pattern 1			
SMTC Configuration		SMTC pattern 1			

SSB Configuration			SSB.1 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
TCI configuration			CSI-RS.Config.0			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7		-104.7	
N_{oc} Note2	Config 1,2	dBm/SCS	-95.7		-95.7	
	Config 3		-95.7		-95.7	
$\hat{E}_s/I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s/N_{oc}$		dB	5	5	-Infinity	5
Io Note3	Config 1,2	dBm/BW	-60.5	-60.5	-66.7	-60.5
	Config 3	dBm/BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

The rate of correct handovers observed during repeated tests shall be at least 90%.

The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ from the start of T2. where:

- $T_{measure}$ = 6720 ms for power class 1 UE and 4160 ms for power class 2/3/4 UE, is the measurements time specified in 38.133 [6] clause 6.1.4.2.2.
- $T_{CHO_execution}$ = 10 ms, is the conditional execution preparation time specified in 38.133 [6] clause 6.1.4.2.2.
- $T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin}$ ms, is the interruption time specified in 38.133 [6] 6.1.4.2.4.
  - $T_{processing}$ = 20 ms, is time for UE processing;
  - T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell;
  - T_{Δ} = 20 ms, is time for fine time tracking and acquiring full timing information of the target cell;
  - T_{margin} = 2 ms, is time for SSB post-processing.

This gives a total of 6792 ms for power class 1 UE and 4232 ms for power class 2/3/4 UE.

The interruption during T2 shall not exceed $T_{interrupt}$ = 62ms.

7.3.3.3 NR SA FR2 intra-frequency NES triggering conditional handover

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.

7.3.3.3.1 Test purpose

This test is to verify the requirement for the NR FR2 intra-frequency NES triggering conditional handover requirements specified in 38.133 [6] clause 6.1.4.4.

7.3.3.3.2 Test applicability

This test applies to all types of NR UE from Release 18 onwards and supporting NES triggering conditional handover.

7.3.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.3.3.

7.3.3.3.4 Test description

7.3.3.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.3.3.4.1-1.

Table 7.3.3.3.4.1-1: test configurations

Config	Description
7.3.3.3-1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.3.3.3.4.1-2

Table 7.3.3.3.4.1-2: Initial conditions for intra-frequency NES triggering conditional handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.3.3.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.3.3.3.4.1-3 below.

Table 7.3.3.3.4.1-3: General test parameters for NES triggering Intra-frequency conditional handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset for condition		dBm	-1	Trigger HO to cell which may be measured as -1dB relative to cell 1. Actual SS-RSRP is 5dB stronger.
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤2	

7.3.3.3.4.2 Test procedure

At the start of time duration T1, the UE may not have any timing information of Cell 2. The UE is configured with a NES-based condition implying handover to cell 2 firstly, during T1, at a time earlier than T_{RRC} before the beginning of T2 and then configured with DCI 2-9 with NES-mode indication during T2. No interruption shall be observed in time period T1,

From start of T2, the Cell 2 becomes detectable and NES-based event is fulfilled. During T2, the UE performs measurement on Cell 2 and evaluates the execution condition, and starts handover procedure when execution condition is satisfied. The UE shall send PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the start of T2. The Interruption length $T_{interrupt}$ shall also be verified in T2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 7.3.3.3.5-1. T1 starts.

3. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedback sent by the UE.

4. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

5. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure NES-based CHO execution condition for the UE.

6. The UE shall transmit an *RRCReconfigurationComplete* message.

7. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.3.3.3.5-1. T2 starts.

8. The SS shall transmit DCI 2-9 command of '1' value for indicating NES-specific CHO execution condition.

9. If the UE transmits the PRACH preambles to Cell 2 less than 1672 ms for PC1 or 1152 ms for PC3 from the beginning of time period T2, and the interruption during T2 is no longer than 62ms, then the number of successful test iterations is increased by one. Otherwise, the number of failure test iterations is increased by one.

10. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

11. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

12. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.3.3.4.3 Message contents

Same as in clause 6.3.3.6.4.3.

7.3.3.3.5 Test requirements

Table 7.3.3.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.3.3.5-1: Cell specific test parameters for TBD

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
AoA setup			Setup 1 as defined in A.3.15			
Assumption for UE beams Note 6			Rough			
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR3.1 TDD			
CORESET Reference Channel			CR3.1 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB.1 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
TCI configuration			CSI-RS.Config.0			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7		-104.7	
N_{oc} Note2	Config 1	dBm/SCS	-95.7		-95.7	
$\hat{E}_s/I_{ot_{BB}}$ Note 8		dB	5.03	-5.41	-Infinity	3.81
$\hat{E}_s/N_{oc}$		dB	6	6	-Infinity	11
Io Note3	Config 1	dBm/BW	-59.7	-54.2	-59.7	-54.2
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 8:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated REFSENS requirement in TS 38.101-2 [19] clause 7.3.2, and an allowance of 1dB for UE multi-band relaxation factor Δ_{MBS} specified in TS 38.101-2 [19] Table 6.2.1.3-4.

$T_{RRC} + T_{Event_DU}$ occurs during T1 as the NES triggering handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.
The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{interrupt} + T_{CHO_execution}$ =1600+62+10=1672 ms (power class 1) or 1080+62+10 =1152 (power classes 2,3 and 4) from the start of T2 and the interruption during T2 shall not exceed $T_{interrupt}=T_{processing} + T_{IU} + T_{\Delta} + T_{margin}$ =40+20+2 = 62ms excluding any transmissions which do not occur due to scheduling restrictions.

The rate of correct handovers observed during repeated tests shall be at least 90% with the confidence level of 95%.

7.3.3.4 NR SA FR2-FR1 inter-frequency NES triggering conditional handover

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- NR FR1 - FR2 OTA testability is still FFS.

7.3.3.4.1 Test purpose

To verify the requirement for the NR FR2 inter-frequency NES triggering conditional handover requirements specified in 38.133 [6] clause 6.1.4.4.

7.3.3.4.2 Test applicability

This test applies to all types of NR UE from Release 18 onwards and supporting NES triggering conditional handover.

7.3.3.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.3.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.3.4.

7.3.3.4.4 Test description

7.3.3.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.3.4.4.1-1.

Table 7.3.3.4.4.1-1: test configurations

Config	Description
7.3.3.4-1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.3.3.4.4.1-2

Table 7.3.3.4.4.1-2: Initial conditions for inter-frequency NES triggering conditional handover

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.1.4.1-1.	

Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.3.4.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.3.3.4.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 7.3.3.4.4.1-3: General test parameters for inter-frequency NES triggering conditional handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	3	

7.3.3.4.4.2 Test procedure

At the start of time duration T1, the UE may not have any timing information of Cell 2. The UE is configured with a NES-based condition implying handover to cell 2 firstly, during T1, at a time earlier than T_{RRC} before the beginning of T2 and then configured with DCI 2-9 with NES-mode indication 950 ms from the start of T2. UE is expected to decode the DCI command 2-9 later than the time when the NES condition is considered met. No interruption shall be observed in time period T1,

From start of T2, the Cell 2 becomes detectable and NES-based event is fulfilled. During T2, the UE performs measurement on Cell 2 and evaluates the execution condition and starts handover procedure when the DCI command is received. The UE shall send PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the start of T2. The Interruption length $T_{interrupt}$ shall also be verified in T2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.
2. Set the parameters according to T1 in Table 7.3.3.4.5-1. T1 starts.
3. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedback sent by the UE.
4. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
5. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure NES-based CHO execution condition for the UE.
6. The UE shall transmit an *RRCReconfigurationComplete* message.
7. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.3.3.4.5-1. T2 starts.

8. The SS shall transmit DCI 2-9 command of '1' value for indicating NES-specific CHO execution condition 950 ms from the start of T2.

9. If the UE transmits the PRACH preambles to Cell 2 less than 1022 ms from the beginning of time period T2, and the interruption during T2 is no longer than 62ms, then the number of successful test iterations is increased by one. Otherwise, the number of failure test iterations is increased by one.

10. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.

11. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

12. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.3.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.3.3.4.4.3-1: RRCReconfiguration (Step 4)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 7.3.3.4.4.3-2	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
conditionalReconfiguration-r16	ConditionalReconfiguration	Table 7.3.3.4.4.3-5	
}			
}			
}			
}			
}			
}			
}			

Table 7.3.3.4.4.3-2: MeasConfig (Table 7.3.3.4.4.3-1)

Derivation Path: Table H.3.1-2			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObjectId[1]	1	entry 1	
measObject[1] CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with Condition INTRA-FREQ MO		
}			
measObjectId[2]	2		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR	Table 7.3.3.4.4.3-3	
}			
}			

Information Element	Value/remark	Comment	Condition
MeasConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofObjectId)) OF MeasObjectToAddMod {	1 entry		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR	Table 7.3.3.4.4.3-3	
}			
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 7.3.3.4.4.3-4	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	1 entry		
MeasIdToAddMod[1] SEQUENCE {			
measId	1		
measObjectId	1		
reportConfigId	1		
}			
}			
quantityConfig	QuantityConfig specified in Table H.3.1-5		
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 7.3.3.4.4.3-4	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	1 entry		
MeasIdToAddMod[1] SEQUENCE {			
measId	2		
measObjectId	1		
reportConfigId	1		
}			
}			
quantityConfig	QuantityConfig specified in Table H.3.1-5		
}			

Table 7.3.3.4.4.3-3: MeasObjectNR (Table 7.3.3.4.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-76

Information Element	Value/remark	Comment	Condition
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR of the SSB associated to inter-frequency neighbour cell		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 7.3.3.4.4.3-4: ReportConfigNR (Table 7.3.3.4.4.3-2)

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
condTriggerConfig SEQUENCE {			
condEventId CHOICE {			
condEventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	0	actuall value = -2*0 = 0dB	
}			
hysteresis	0	actuall value = 0*0.5 = 0dB	
timeToTrigger	ms0		
}			
}			
nesEvent-r18	true		
}			
}			
}			

Table 7.3.3.4.4.3-5: ConditionalReconfiguration (Table 7.3.3.4.4.3-1)

Derivation Path: TS 38.508-1[14], Table 4.6.3-25D			
Information Element	**Value/remark**	**Comment**	**Condition**
ConditionalReconfiguration-r16::= SEQUENCE {			
condReconfigToAddModList-r16 SEQUENCE (SIZE (1.. maxNrofCondCells-r16)) OF CondReconfigToAddMod-r16 {	1 entry		
CondReconfigToAddMod-r16 [1] SEQUENCE {		entry 1	
condReconfigId-r16	1		
condExecutionCond-r16 SEQUENCE (SIZE (1..2)) OF MeasId {	1 entry		
MeasId[1]	1	The MeasId configured in Table 7.3.3.4.4.3-2	
}			
condRRCReconfig-r16	OCTET STRING (CONTAINING RRCReconfiguration Specified in Table 4.8.1-1A with condition RBConfig_NoKeyChange)		
}			
}			
}			

7.3.3.4.5 Test requirements

Table 7.3.3.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.3.4.5-1: Cell specific test parameters for NR FR2-FR1 Inter frequency conditional handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
AoA setup			Setup 1 as defined in A.3.15		NA	
Assumption for UE beams Note 6			Rough		NA	
Duplex mode			TDD		FDD	
TDD configuration			TDDConf.3.1		NA	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
DRx Cycle		ms	Not Configured		Not Configured	
Gap pattern ID			gp0		NA	
PDSCH Reference measurement channel			SR3.1 TDD		SR.1.1 FDD	
CORESET Reference Channel			CR3.1 TDD		CR.1.1 FDD	
OCNG Patterns			OCNG pattern 1		OCNG pattern 1	
SMTC Configuration			SMTC pattern 1		SMTC pattern 1	
SSB Configuration			SSB.1 FR2		SSB.1 FR1	
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz		15 kHz	
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz		15 kHz	
PRACH configuration			FR2 PRACH configuration 1		FR1 PRACH configuration 1	
TRS configuration			TRS.2.1 TDD		NA	
TCI configuration			CSI-RS.Config.0		NA	
BWP configuration	Initial DL BWP		DLBWP.0.1		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
Propagation condition		-	AWGN		N/A Link only, see clause A.3.7A	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

Table 7.3.3.4.5-2: OTA related test parameters for NR FR2-FR1 Inter frequency conditional handover test case

Parameter		Unit	Cell 1				Cell 2			
			T1	T2	T3	T4	T1	T2	T3	T4
Angle of arrival configuration			According to clause A.3.15.1				N/A			
Assumption for UE beams Note 7			Rough				N/A			
N_{oc} Note 1	Config 1,2,3	dBm/15kHz	-104.7				Link only, see clause A.3.7A			
N_{oc} Note 1	Config 1,2,3	dBm/SCS	-95.7							

$\hat{E}_s/N_{oc}$	Config 1,2,3	dB	7	
$\hat{E}_s/I_{ot}$	Config 1,2,3	dB	7	
SSB_RP Note 2, Note 4	Config 1,2,3	dBm/SCS	-88.7	
Io Note 2, Note 4	Config 1,2,3	dBm/95.04 MHz	-58.92	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

$T_{RRC} + T_{Event_DU}$ occurs during T1 as the handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{interrupt} + T_{CHO_execution}$ = 1022ms from the start of T2 and the interruption during T2 shall not exceed $T_{interrupt}=T_{processing} + T_{IU} + T_{\Delta} + T_{margin}$ = 62 ms excluding any transmissions which do not occur due to measurement gaps.

7.3.3.5 NR SA FR2 NR conditional handover including target MCG and target SCG from FR1-FR2 NR-DC to FR1-FR2 NR-DC

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Message contents are TBD.
- Test procedure shall require an update.

7.3.3.5.1 Test purpose

The purpose of this test is to verify the requirements of CHO including target MCG and target SCG in NR-DC requirements specified in clause 6.1.6.2 in TS 38.133 [6]. This test verifies the requirements for inter-frequency FR1-FR1 conditional handover and intra-frequency FR2-FR2 PSCell change.

7.3.3.5.2 Test applicability

This test applies to all types of NR-DC UE from Release 17 onwards and supporting conditional handover.

7.3.3.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.3.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.3.5.

7.3.3.5.4 Test description

7.3.3.5.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.3.5.4.1-1.

Table 7.3.3.5.4.1-1: NR Supported test configurations for CHO with PSCell change from NR-DC to NR-DC

Config	Description
1	Source PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Source PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	Source PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Source PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	Source PCell: FR1 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target PCell: FR1 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Source PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.3.3.5.4.1-2.

Table 7.3.3.5.4.1-2: Initial conditions for NR SA FR2-FR2 conditional handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

1. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.

Table 7.3.3.5.4.1-3: General test parameters for PCell FR1-FR1 Inter frequency conditional handover

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 3	
Final condition	Active cell		Cell 3	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤5	

Table A.7.3.3.5.1-4: General test parameters Intra-frequency FR2-FR2 PSCell change

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 2	
	Neighbouring cell		Cell 4	
Final condition	Active cell		Cell 4	
A4-Offset		dBm	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

7.3.3.5.4.2 Test procedure

The test scenario comprises four NR cells, source PCell(Cell 1) and source PSCell(Cell 2), target PCell(Cell 3), target PSCell(Cell 4).Cell 1 and Cell 3 are on radio channel 1 in FR1.Cell 2 and Cell 4 are on radio channel 2 in FR2. The supported test configurations are given in Table **7**.3.3.5.4.1-1. Test parameters are given in Tables Table 7.3.3.5.4.1-3 and Table 7.3.3.5.4.1-4 below.

The test consists of two successive time periods, with time durations of T1, T2 respectively.

At the start of time duration T1, the UE shall be connected to Cell 1 on radio channel 1 and Cell 2 on radio channel 2. The UE does not have any timing information of cell 3 and cell 4. NR shall configure a message implying conditional handover including target MCG in FR1 and target SCG in FR2 to Cell 3 during T1, at a time earlier than T_{RRC} before the beginning of T2. UE shall be able to do inter-frequency conditional handover from cell 1 to cell 3 and intra-frequency PSCell change from cell 2 to cell 4.

No interruption shall be observed in time period T1. where,

- T_{RRC} = 16ms, is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

At the start of T2, Cell 3 and Cell 4 become detectable and the condition for conditional PCell handover is met. During T2, the UE performs measurement on Cell 3 and evaluates the execution condition and starts handover procedure when execution condition is satisfied.

The UE shall start to transmit the PRACH to Cell 3 less than $T_{measure} + T_{interrupt} + T_{CHO_execution}$ from the start of T2 and the interruption during T2 shall not exceed $T_{interrupt}=T_{processing} + T_{IU} + T_{\Delta} + T_{margin}$.

The UE shall start to transmit the PRACH to Cell 4 less than $T_{measure} + T_{CHO_execution} + T_{processing} + T_{search_PCell_Conditional} + T_{search_PSCell} + T_{\Delta_PSCell} + T_{PSCell_DU} + 2$ from the start of T2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 and Cell 2 is the active cell. Set Cell 3 and Cell 4 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 7.3.3.5.5-1 and Table 7.3.3.5.5-2. Propagation conditions are set according to Annex C clause C.2.2. T1 starts. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1, Cell 2 and monitoring corresponding ACK/NACK feedback sent by the UE.

3. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) and Cell 4 physical cell identity = ((current cell 4 physical cell identity + 1) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure CHO execution condition and measurement gap pattern #0 for the UE.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.3.3.5.5-1 and Table 7.3.3.5.5-2. T2 starts.

7. If

a_ the UE transmits the PRACH preambles to Cell 3 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the beginning of time period T2,

b) The UE shall start to transmit the PRACH to Cell 4 less than $T_{measure} + T_{CHO_execution} + T_{processing} + T_{search_PCell_Conditional} + T_{search_PSCell} + T_{\Delta_PSCell} + T_{PSCell_DU} + 2$ from the start of T2.

and

no longer than X consecutive ACK/NACK DTXs are observed by the SS from the start of T2 to the instant the UE transmits the first PRACH preamble, where

- $X = 8 \cdot T_{interrupt}$ for all test configurations

then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back from cell 3 to cell 1 and PSCell change from cell 4 to cell 2.

9. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, Cell 2, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1 and Cell 2.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.3.5.4.3 Message Contents

TBD

7.3.3.5.5 Test Requirements

7.3.3.5.5.1 Test Requirements for NR Conditional Handover

Table 7.3.3.5.5-1: Cell specific test parameters for PCell FR1-FR1 Inter frequency conditional handover

Parameter		Unit	Cell 1		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			

EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98		-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s/I_{ot}$		dB	4+TT	4+TT	-Infinity	5+TT
$\hat{E}_s/N_{oc}$		dB	4+TT	4+TT	-Infinity	5+TT
SSB_RP	Config 1,2	dBm/SCS	-94+TT	-94+TT	-Infinity	-93+TT
	Config 3	dBm/SCS	-91+TT	-91+TT	-Infinity	-90+TT
Io Note3	Config 1,2	dBm/ 9.36MHz	-64.59+TT	-64.59+TT	-70.05+TT	-63.85+TT
	Config 3	dBm/ 38.16MHz	-58.49+TT	-58.49+TT	-63.94+TT	-57.75+TT
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

$T_{RRC} + T_{Event_DU}$ occurs during T1 as the handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 3 less than $T_{measure} + T_{interrupt} + T_{CHO_execution}$ from the start of T2. where:

- For power class 1 = 6720+47+10ms=6777 ms.
- For power class 2, 3 and 4 = 4160+47+10ms =4217ms.
- $T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin}$ ms=25+20+2 = 47ms, is the interruption time.

This gives a total of 6777 ms for power class 1 UE and 4217 ms for power class 2/3/4 UE.

The interruption during T2 shall not exceeed $T_{interrupt}$ = 47ms.

The rate of correct handovers observed during repeated tests shall be at least 90%.

7.3.3.5.5.2 Test Requirements for NR PSCell change

Table 7.3.3.5.5-2: Cell specific test parameters for Intra-frequency FR2-FR2 PSCell change

Parameter	Unit	Cell 2		Cell 4	
		T1	T2	T1	T2
Assumption for UE beams Note 6		Rough		Rough	
AoA setup		Setup 1 as defined in A.3.15			
NR RF Channel Number		1		1	
Duplex mode		TDD			
TDD configuration		TDDConf.3.1			
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			
BWP BW	MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated		66			
DRx Cycle	ms	Not Applicable			
PDSCH Reference measurement channel		SR3.1 TDD			
RMSI CORESET Reference Channel		CR3.1 TDD			

Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			O P. 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB. 3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7			
N_{oc} Note2		dBm/SCS	-95.7			
$\hat{E}_s / I_{ot}$		dB	6+TT	-1.8+TT	-Infinity	0+TT
$\hat{E}_s / N_{oc}$		dB	6+TT	6+TT	-Infinity	7+TT
Io Note3		dBm/BW	-59.7+TT	-56.7+TT	-59.7+TT	-56.7+TT
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall start to transmit the PRACH to Cell 4 less than $T_{measure} + T_{CHO_execution} + T_{processing} + T_{search_PCell_Conditional} + T_{search_PSCell} + T_{\Delta_PSCell} + T_{PSCell_DU} + 2$ from the start of T2.

- For power class 1 = 6720+10+25+20+10ms+2= 6792 ms.
- For power class 2, 3 and 4 = 4160+25+20+10+2ms = 4232ms.

This gives a total of 6792 ms for power class 1 UE and 4232 ms for power class 2/3/4 UE.

7.3.4 LTM PCell Switch

7.3.4.0 Minimum conformance requirements

7.3.4.0.1 Minimum conformance requirements for NR FR2 LTM PCell Switch

Same as section 6.3.4.0.1

7.3.4.1 NR SA FR2 RACH based Intra-frequency PCell switch from FR2 to FR2

Editor's Note: The test is incomplete in following aspects:

- Some parameters are in brackets.
- TT analysis is missing.

7.3.4.1.1 Test purpose

To verify the UE's ability to perform NR FR2-NR FR2 RACH-based intra frequency PCell switch specified in 38.133 [6] clause 6.3.1, including cell switch delay and interruption length, for both with and without early TCI state activation.

7.3.4.1.2 Test applicability

This test applies to all types of NR UEs supporting NR LTM for MCG from Release 18 onwards.

The test consists of 4 tests, and UE is required to pass one among Test 1A, Test 1B, Test 2A and Test 2B.

- Test 1: for a UE supporting *ltm-MAC-CE-JointTCI-r18 and/or ltm-MAC-CE-SeparateTCI-r18*
  - Test 1A: for a UE supporting *ltm-MAC-CE-JointTCI-r18*.
  - Test 1B: for a UE supporting *ltm-MAC-CE-SeparateTCI-r18* and does not support *ltm-MAC-CE-JointTCI-r18*.
- Test 2: for a UE not supporting *ltm-MAC-CE-JointTCI-r18 and ltm-MAC-CE-SeparateTCI-r18*
  - Test 2A: for a UE supporting *ltm-BeamIndicationJointTCI-r18*.
  - Test 2B: for a UE supporting *ltm-BeamIndicationSeparateTCI-r18* and does not support *ltm-BeamIndicationJointTCI-r18*.

7.3.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.4.1.

7.3.4.1.4 Test description

7.3.4.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.4.1.4.1-1.

Table 7.3.4.1.4.1-1: Intra-frequency cell switch from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.3.4.1.4.1-2.

Table 7.3.4.1.4.1-2: Initial conditions for Intra-frequency cell switch from FR2 to FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.4.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.3.4.1.4.1-3.
2. Message contents are defined in clause 7.3.4.1.4.3.
3. Two cells are deployed in the test, which are FR2 PCell (Cell 1) and FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 7.3.4.1.4.1-3: General test parameters for Intra-frequency cell switch from FR2 to FR2

Parameter		Unit	Value				Comment
			Test 1A	Test 1B	Test 2A	Test 2B	
Initial conditions	Active cell		Cell 1				
	Neighbouring cell		Cell 2				Cell 2 is the candidate cell
Final condition	Active cell		Cell 2				
A3-Offset		dB	[-15]				
Hysteresis		dB	0				
Time To Trigger		s	0				
Filter coefficient			0				L3 filtering is not used
DRX			OFF				DRX is not used
Access Barring Information		-	Not Sent				No additional delays in random access procedure.
Time offset between cells			0.3 μs				RTD between cells is less than CP
deriveSSB-IndexFromCell			Enabled				
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	320				Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1				Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1				
	spCellInclusion		N/A				
ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		Candidate DLorJoint TCI.State.0	Candidate DLorJoint TCI.State.2	Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	As specified in clause A.10B. In test 1A and 1B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for early TCI state activation. CandidateTCI-State#2 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command. In test 2A and 2B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command.
	CandidateTCI-State#2		Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	N/A	N/A	
ltm-UL-TCI-StatesToAddModList	CandidateTCI-UL-State#1		N/A	Candidate UL TCI.State.0	N/A	Candidate UL TCI.State.0	
ltm-ConfigComplete			True				Candidate cell's configuration is complete configuration
T1		s	<3				
T2		s	≤0.2				
T3		s	≤0.1				
T4		s	≤0.2				

7.3.4.1.4.2 Test procedure

Two cells are deployed in the test, which are FR2 PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. Test configurations are given in table 7.3.4.1.4.1-1.

Both cell switch delay and interruption length are tested by using the parameters in table 7.3.4.1.4.1-3, and 7.3.4.1.5-1.

The test consists of four successive time periods, with time durations of T1, T2, T3 and T4, respectively.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 7.3.4.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. SS shall transmit an RRCReconfiguration message to configure event A3 triggered measurement reporting on the intra-frequency carrier of Cell 2.

4. UE shall transmit RRCReconfigurationComplete message.

5. If the UE transmit an A3 message report, the SS shall switch the power setting from T1 to T2 as specified in Table 7.3.4.1.5-1. T2 starts.

6. At the start of T2, the SS shall transmit an *RRCReconfiguration* message with *LTM-Candidate-r18* for Cell2, and SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports on the candidate cell (Cell 2) in PUCCH format 2.

7. UE shall transmit RRCReconfigurationComplete message.

8. If the UE transmits a valid L1-RSRP result of Cell2:

   - Test 1A and 1B: The SS shall switch the power setting from T2 to T3 as specified in Table 7.3.4.1.5-1. T3 starts.

   - Test 2A and 2B: T3 is skipped. The SS shall switch the power setting from T2 to T4 as specified in Table 7.3.4.1.5-1. T4 starts, go to step10.

9. At the start of T3, the SS shall transmit a Candidate Cell TCI States Activation MAC-CE (Refer to TS 38.321 [12], clauses 5.18.36, 6.1.3.76) of Cell2. 50ms after the candidate cell TCI state activation MAC-CE transmission, the SS shall switch the power setting from T3 to T4 as specified in Table 7.3.4.1.5-1. T4 starts.

   candidate cell TCI activation MAC-CE:

   - Test 1A: *CandidateTCI-State#1* is activated.

   - Test 1B: *CandidateTCI-State#1* and *CandidateTCI-UL-State#1* is activated.

10. The start of T4 is the instant when the last TTI containing the LTM cell switch command MAC CE(Refer TS 38.321 [12], clauses 6.1.3.75) is sent by Cell1 to the UE.

    cell switch MAC-CE:

    - Contention-Free Random-Access Resources are indicated and the field of Timing Advance Command is set to FFF

    - Test 1A: CandidateTCI-State#2 is indicated.

    - Test 1B: CandidateTCI-State#2 and CandidateTCI-UL-State#1 are indicated

    - Test 2A: CandidateTCI-State#1 is indicated.

    - Test 2B: CandidateTCI-State#1 and CandidateTCI-UL-State#1 are indicated

11. If the UE transmits the uplink PRACH channel to Cell 2 less than D_{LTM} from the beginning of time period T4 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.T4 ends.

12. After T4 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync*, which includes the release of *LTM-Config-r18*, to cause UE handover back to Cell 1.

13. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1

14. Power off Cell2 and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop. Upon setting the new physical cell identity for Cell 2, power on Cell 2 to ensure Cell 2 is available for the following test steps.

15. Repeat steps 2-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.3.4.1.4.3-1: Common Exception messages (step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.3 FR2, SMTC.1 and Synchronous cells Table H.3.1-4 with A3-offset = [-15dB] Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ

Table 7.3.4.1.4.3-2: Common Exception messages (step 6)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.12.1 with Condition LTM L1-RSRP Table H 3.12-2 with Condition LTM L1-RSRP Table H.3.12-3 for Cell 2 and Condition Candidate config and TCI_INFO Table H.3.12.4 Table H.3.12-5 with pucch-ResourceId = 8 Table H.3.12-6, H.3.12-7 and H.3.12-13 with SSB index = 0 Table H.3.12-8 Table H.3.12-9 for Cell 2 Table H.3.12-10 with Condition Joint AND Early DL Sync for Test 1A Table H.3.12-10 with Condition Seperate for Test 1B and Test 2B Table H.3.12-10 with Condition Joint for Test 2A Table H.3.12-11

Table 7.3.4.1.4.3-3: *RACH-ConfigCommon* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric specified in TS 38.508-1 [14] Table 7.3.1-14 with condition FR2		
totalNumberOfRA-Preambles	48		
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n16		
}			
rsrp-ThresholdSSB	RSRP_51		

prach-RootSequenceIndex CHOICE {			
0			
}			
msg1-SubcarrierSpacing	kHz 120		
}			

Table 7.3.4.1.4.3-4: *RACH-ConfigDedicated* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	1 entry		
ssb[1]	0		
ra-PreambleIndex[1]	40		
}			
ra-ssb-OccasionMaskIndex	1		
}			
}			
}			
}			

7.3.4.1.5 Test requirements

Table 7.3.4.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.4.1.5-1: Cell specific test parameters for NR FR2-FR2 Intra frequency cell switch test case

Parameter		Unit	Cell 1	Cell 2
			T1 ~ T4	T1 ~ T4
NR RF Channel Number			1	1
Assumption for UE beams[Note 6]			Rough	Rough
AoA setup			Setup 1 as defined in A.9.1	
Duplex mode			TDD	
TDD configuration			[TDDConf.3.1]	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
BWP BW		MHz	100: $N_{RB,c}$ = 66	
PDSCH Reference			SR3.1 TDD	
CORESET Reference Channel			CR3.1 TDD	
Control Channel RMC			CCR.3.1 TDD	
CP length			Normal	
TRS configuration			TRS.2.1 TDD	
OCNG Patterns			OP.1	
SMTC Configuration			SMTC.1	
SSB Configuration			SSB.3 FR2	
PDSCH/PDCCH subcarrier spacing		kHz	120	
PUCCH/PUSCH subcarrier spacing		kHz	120	
PRACH configuration			PRACH.6 FR2	
PDSCH/PDCCH TCI state			TCI.State.2	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				

EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2	dBm/15kHz	-104.7+TT	
N_{oc} Note2	dBm/SCS	-95.7+TT	
$\hat{E}_s / I_{ot}$	dB	-1.8+TT	0+TT
$\hat{E}_s / N_{oc}$	dB	6+TT	7+TT
SSB_RP	dBm/SCS	-89.7+TT	-88.7+TT
Io Note3	dBm/ 95.04MHz	-56.7+TT	-56.7+TT
Propagation condition	-	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

The UE shall start to transmit the PRACH to Cell 2 in no later than D_{LTM} from the beginning of time period T4. The rate of correct cell switches observed during repeated tests shall be at least 90%.

NOTE: The cell switch delay can be expressed as D_{LTM} (= T_{cmd} + $T_{LTM\text{-}interrupt}$), where:

T_{cmd} = T_{HARQ} + 3ms and is specified in 38.133 [6] clause 6.3.1.2.

$T_{LTM\text{-}interrupt}$ = $T_{LTM\text{-}RRC\text{-}processing}$ + $T_{LTM\text{-}processing}$ + $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$ + $T_{LTM\text{-}IU}$ ms and is specified in 38.133 [6] clause 6.3.1.2.1

- $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$= 0 ms for Test 1A and 1B, $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$= 22 ms for Test 2A and 2B
- $T_{LTM\text{-}IU_}$=20ms
- $T_{LTM\text{-}RRC\text{-}processing}$ =10 ms if UE does not support *ltm-FastProcessingConfig-r18*, otherwise $T_{LTM\text{-}RRC\text{-}processing}$ =0ms
- $T_{LTM\text{-}processing}$ =10 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 10 ms for FR2-to-FR2 cell switch in the capability
- $T_{LTM\text{-}processing}$ =15 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 15 ms for FR2-to-FR2 cell switch in the capability
- $T_{LTM\text{-}processing}$ =20 ms if the UE does not support *ltm-FastUE-Processing-r18* capability.

7.3.4.2 NR SA FR2 RACH-less Intra-frequency PCell switch from FR2 to FR2

Editor's Note: The test is incomplete in following aspects:

- Some parameters are in brackets.
- TT analysis is missing.

7.3.4.2.1 Test purpose

To verify the UE's ability to perform NR FR2-NR FR2 RACH-less intra frequency PCell switch specified in 38.133 [6] clause 6.3.1, including cell switch delay and interruption length, for both with and without early TCI state activation.

7.3.4.2.2 Test applicability

This test applies to all NR UEs supporting NR LTM for MCG with RACH-less with L1-RSRP measurement and report from Release 18 onwards, and with optional support for *rach-EarlyTA-Measurement-r18*. The test consists of four parts, and the UE is required to pass one among Test 1A, Test 1B, Test 2A and Test 2B:

- Test 1: for a UE that supports ltm-MAC-CE-JointTCI-r18 and/or ltm-MAC-CE-SeparateTCI-r18
  - Test 1A: for a UE that supports *ltm-MAC-CE-JointTCI-r18*.
  - Test 1B: for a UE that supports *ltm-MAC-CE-SeparateTCI-r18* and does not support *ltm-MAC-CE-JointTCI-r18*.
- Test 2: for a UE that does not supports ltm-MAC-CE-JointTCI-r18 and ltm-MAC-CE-SeparateTCI-r18
  - Test 2A: for a UE that supports *ltm-BeamIndicationJointTCI-r18*.
  - Test 2B: for a UE that supports ltm-BeamIndicationSeparateTCI-r18 and does not support ltm-BeamIndicationJointTCI-r18.

7.3.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.4.2.

7.3.4.2.4 Test description

7.3.4.2.4.1 Initial conditions

Initial conditions are a set of test configurations that the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.4.2.4.1-1.

Table 7.3.4.2.4.1-1: Intra-frequency cell switch from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.3.4.2.4.1-2.

Table 7.3.4.2.4.1-2: Initial conditions for Intra-frequency cell switch from FR2 to FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.4.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.3.4.2.4.1-3.
2. Message contents are defined in clause 7.3.4.2.4.3.
3. Two cells are deployed in the test, which are FR2 PCell(Cell 1) and FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 7.3.4.2.4.1-3: General test parameters for Intra-frequency cell switch from FR2 to FR2

Parameter		Unit	Value				Comment
			Test 1A	Test 1B	Test 2A	Test 2B	
Initial conditions	Active cell		Cell 1				
	Neighbouring cell		Cell 2				Cell 2 is the candidate cell
Final condition	Active cell		Cell 2				

A3-Offset		dB	[-15]				
Hysteresis		dB	0				
Time To Trigger		s	0				
Filter coefficient			0				L3 filtering is not used
DRX			OFF				DRX is not used
Access Barring Information		-	Not Sent				No additional delays in random access procedure.
Time offset between cells			0.3 µs				RTD between cells is less than CP
deriveSSB-IndexFromCell			Enabled				
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	320				Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1				Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1				
	spCellInclusion		N/A				
EarlyUL-SyncConfig	frequencyInfoUL		NR RF Channel Number 1				Same as Cell 1
	PRACH configuration		PRACH.5 FR2				RACH bandwidth is within active UL BWP of Cell 1
	bwp-GenericParameters		ULBWP.0.1				
	n-TimingAdvanceOffset	Tc	N/A				
ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		Candidate DLorJoint TCI.State.0	Candidate DLorJoint TCI.State.2	Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	As specified in clause A.10B. In test 1A and 1B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for early TCI state activation. CandidateTCI-State#2 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command. In test 2A and 2B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command.
	CandidateTCI-State#2		Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	N/A	N/A	
ltm-UL-TCI-StatesToAddModList	CandidateTCI-UL-State#1		N/A	Candidate UL TCI.State.0	N/A	Candidate UL TCI.State.0	
ltm-ConfigComplete			True				Candidate cell's configuration is complete configuration
T1		s	<3				
T2		s	≤0.2				
T3		s	≤0.1				
T4		s	≤0.2				
T5		s	≤0.1				

7.3.4.2.4.2 Test procedure

Two cells are deployed in the test, which are FR2 PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. Test configurations are given in Table 7.3.4.2.4.1-1. No measurement gap is configured in the test case.

Both cell switch delay and interruption length are tested by using the parameters in table 7.3.4.2.4.1-3, and 7.3.4.2.5-1.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5, respectively.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRCReconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 7.3.4.2.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message to configure event A3 triggered measurement reporting on the intra-frequency carrier of Cell 2 for Test 1A, 1B, 2A and 2B.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. The UE shall transmit a *MeasurementReport* message triggered by Event A3. T1 ends with UE reporting an L3 measurement result of Cell2 to Cell 1.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 7.3.4.2.5-1. T2 starts.

7. At the start of T2, the SS shall transmit an *RRCReconfiguration* message with *LTM-Candidate-r18* for Cell 2, and SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports on the candidate cell (Cell 2) in PUCCH format 2 for Test 1A, 1B, 2A and 2B.

8. The UE shall transmit *RRCReconfigurationComplete* message.

9. T2 ends with UE reporting a valid L1-RSRP result of Cell 2.

- Test 1A and 1B: The SS shall switch the power setting from T2 to T3 as specified in Table 7.3.4.2.5-1. T3 starts.

- Test 2A and 2B: T3 is skipped. The SS shall switch the power setting from T2 to T4 as specified in Table 7.3.4.2.5-1 if the UE is capable of *rach-EarlyTA-Measurement-r18*. T4 starts, go to step12. Otherwise, the SS shall switch the power setting from T2 to T5 as specified in Table 7.3.4.2.5-1. T5 starts, go to step14.

10. At the start of T3, the SS shall transmit a Candidate Cell TCI States Activation MAC-CE (Refer to TS 38.321 [12], clauses 5.18.36, 6.1.3.76) of Cell 2.

- In Test 1A, *CandidateTCI-State#1* is activated.

- In Test 1B, *CandidateTCI-State#1* and *CandidateTCI-UL-State#1* are activated.

11. T3 ends 50ms after the candidate cell TCI state activation MAC CE transmission. And the SS shall switch the power setting from T3 to T4 as specified in Table 7.3.4.2.5-1. T4 starts.

- For the UE is incapable of *rach-EarlyTA-Measurement-r18*, T4 is skipped. The SS shall switch the power setting from T3 to T5 as specified in Table 7.3.4.2.5-1. T5 starts, go to step14.

12. At the start of T4, the SS shall transmit a PDCCH order (Refer to TS 38.213 [8], clause 21, and TS 38.212 [31], clause 7.3.1.2.1) to trigger the UE to transmit the PRACH on Cell 2 for Test 1A, 1B, 2A and 2B if the UE is capable of *rach-EarlyTA-Measurement-r18*.

13. T4 ends 5ms after the UE transmits the PRACH to Cell 2. And the SS shall switch the power setting from T4 to T5 as specified in Table 7.3.4.2.5-1. T5 starts.

14. The start of T5 is the instant when the last TTI containing the LTM Cell Switch Command MAC-CE (Refer to TS 38.321 [12], clauses 5.18.35, 6.1.3.75) is sent by Cell 1 to trigger UE switches to Cell 2 for Test 1A, 1B, 2A and 2B. T5 starts.

    - In the cell switch MAC-CE:

- The target cell is Cell 2.
- Timing Advance Command is set to 0.
- In test 1A, *CandidateTCI-State#2* is indicated.
- In test 1B, *CandidateTCI-State#2* and *CandidateTCI-UL-State#1* are indicated.
- In test 2A, *CandidateTCI-State#1* is indicated.
- In test 2B, *CandidateTCI-State#1* and *CandidateTCI-UL-State#1* are indicated.

- Cell 2 continuously schedules PUSCH for the UE.

15. T5 ends either at the UL slot of PUSCH scheduled by Cell 2 at the first DL slot not earlier than (T_{cmd} + $T_{LTM\text{-}RRC\text{-}processing}$ + $T_{LTM\text{-}processing}$ + $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$) after the beginning of T5 or upon the reception of PUSCH at Cell 2, whichever is earlier. The values of T_{cmd}, $T_{LTM\text{-}RRC\text{-}processing}$ $T_{LTM\text{-}processing}$, $T_{first\text{-}RS}$ and $T_{RS\text{-}proc}$ are specified in 7.3.4.2.5.
16. If the UE transmits PUSCH to Cell 2 in less than D_{LTM} (= T_{cmd} + $T_{LTM\text{-}interrupt}$) ms from the beginning of time period T5, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
17. After T5 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync*, which includes the release of *LTM-Config-r18*, to cause UE handover back to Cell 1.
18. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 on Cell 1.
19. Power off Cell2 and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop. Upon setting the new physical cell identity for Cell 2, power on Cell 2 to ensure Cell 2 is available for the following test steps.
20. Repeat steps 2-19 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.3.4.2.4.3-1: Common Exception messages (Step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.3 FR2, SMTC.1 and Synchronous cells Table H.3.1-4 with A3-offset = [-15dB] Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ

Table 7.3.4.2.4.3-2: Common Exception messages (Step 7)

Default Message Contents

Default RRC messages and information elements contents exceptions	Table H.3.12-1 with Condition L1-RSRP Table H.3.12-2 with Condition L1-RSRP Table H.3.12-3 for Cell 2 with Condition Candidate Config, TA_PDCCH-ORDER, TCI_INFO Table H.3.12-4 Table H.3.12-5 for Cell 1 with pucch-ResourceId = 8 Table H.3.12-6, H.3.12-7 and H.3.12-13 with SSB-Index = 0 Table H.3.12-8 Table H.3.12-9 for Cell 2 Table H.3.12-10 with Condition Joint AND Early DL Sync for Test 1A Table H.3.12-10 with Condition Separate for Test 1B and Test 2B Table H.3.12-10 with Condition Joint for Test 2A Table H.3.12-11 Table H.3.12-12 for Cell 2 with l139 = 0

Table 7.3.4.2.4.3-3 *RACH-ConfigCommon* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric specified in TS 38.508-1 [14] Table 7.3.1-14 with condition FR2		
totalNumberOfRA-Preambles	48		
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n16		
}			
rsrp-ThresholdSSB	RSRP_51		
prach-RootSequenceIndex CHOICE {			
0			
}			
msg1-SubcarrierSpacing	kHz 120		
}			

Table 7.3.4.2.4.3-4: *RACH-ConfigDedicated* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	1 entry		
ssb[1]	0		
ra-PreambleIndex[1]	40		
}			
ra-ssb-OccasionMaskIndex	1		
}			
}			
}			
}			

7.3.4.2.5 Test requirement

Table 7.3.4.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.4.2.5-1: Cell specific test parameters for NR FR2-FR2 Intra frequency cell switch

Parameter		Unit	Cell 1	Cell 2
			T1 ~ T5	T1 ~ T5
NR RF Channel Number			1	1
Assumption for UE beams[Note 6]			Rough	Rough
AoA setup			Setup 1 as defined in A.9.1	
Duplex mode			TDD	
TDD configuration			[TDDConf.3.1]	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
BWP BW		MHz	100: $N_{RB,c}$ = 66	
PDSCH Reference			SR3.1 TDD	
CORESET Reference Channel			CR3.1 TDD	
Control Channel RMC			CCR.3.1 TDD	
CP length			Normal	
TRS configuration			TRS.2.1 TDD	
OCNG Patterns			OP.1	
SMTC Configuration			SMTC.1	
SSB Configuration			SSB.3 FR2	
PDSCH/PDCCH subcarrier spacing		kHz	120	
PUCCH/PUSCH subcarrier spacing		kHz	120	
PRACH configuration			PRACH.6 FR2	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-104.7+TT	
N_{oc} Note2		dBm/SCS	-95.7+TT	
$\hat{E}_s / I_{ot}$		dB	-1.8+TT	0+TT
$\hat{E}_s / N_{oc}$		dB	6+TT	7+TT
SSB_RP		dBm/SCS	-89.7+TT	-88.7+TT
Io[Note3]		dBm/ 95.04MHz	-56.7+TT	-56.7+TT
Propagation condition		-	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit PUSCH to Cell 2 in no later than D_{LTM} from the beginning of time period T5.
The rate of correct cell switches observed during repeated tests shall be at least 90%.

NOTE: The cell switch delay can be expressed as D_{LTM} (= T_{cmd} + $T_{LTM\text{-}interrupt}$), where:

T_{cmd} = T_{HARQ} + 3ms, as specified in TS 38.133 [6] clause 6.3.1.2. $T_{LTM\text{-}interrupt}$ = $T_{LTM\text{-}RRC\text{-}processing}$ + $T_{LTM\text{-}processing}$ + $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$ + $T_{LTM\text{-}IU}$ is defined in TS 38.133 [6] clause 6.3.1.3.

- $T_{first-RS}$ + $T_{RS-proc}$=0 for Test 1A and 1B, $T_{first-RS}$ + $T_{RS-proc}$=22ms for Test 2A and 2B.
- T_{LTM-IU} is the uncertainty in transmitting the first uplink transmission on Cell 2.
- $T_{LTM-RRC-processing}$ = 10 ms if the UE does not support *ltm-FastProcessingConfig-r18*, otherwise $T_{LTM-RRC-processing}$ =0ms
- $T_{LTM-processing}$ = 10 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 10 ms for FR2-to-FR2 cell switch in the capability
- $T_{LTM-processing}$ = 15 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 15 ms for FR2-to-FR2 cell switch in the capability
- $T_{LTM-processing}$ = 20 ms if the UE does not support *ltm-FastUE-Processing-r18* capability.

7.3.4.3 NR SA FR2 RACH-based Inter-frequency LTM PCell switch from FR2 to FR2

Editor's Note: The test is incomplete in following aspects:

- Some parameters are in brackets.
- TT analysis is missing.

7.3.4.3.1 Test purpose

To verify the UE's ability to perform NR FR2-NR FR2 RACH-based inter frequency PCell switch specified in 38.133 [6] clause 6.3.1, including cell switch delay and interruption length, for both with and without early TCI state activation.

7.3.4.3.2 Test applicability

This test applies to all types of NR UEs supporting NR LTM for MCG with L1-RSRP measurement and report based on SSB(s) of candidate cell(s) from Release 18 onwards.

The test consists of 4 tests, and UE is required to pass one among Test 1A, Test 1B, Test 2A and Test 2B.

- Test 1: for a UE supporting *ltm-MAC-CE-JointTCI-r18 and/or ltm-MAC-CE-SeparateTCI-r18*
  - Test 1A: for a UE supporting *ltm-MAC-CE-JointTCI-r18*.
  - Test 1B: for a UE supporting *ltm-MAC-CE-SeparateTCI-r18* and does not support *ltm-MAC-CE-JointTCI-r18*.
- Test 2: for a UE not supporting *ltm-MAC-CE-JointTCI-r18 and ltm-MAC-CE-SeparateTCI-r18*
  - Test 2A: for a UE supporting *ltm-BeamIndicationJointTCI-r18*.
  - Test 2B: for a UE supporting ltm-BeamIndicationSeparateTCI-r18 and does not support ltm-BeamIndicationJointTCI-r18.

7.3.4.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.3.4.3.

7.3.4.3.4 Test description

7.3.4.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.4.3.4.1-1.

Table 7.3.4.3.4.1-1: Inter-frequency cell switch from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

	Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.3.4.3.4.1-2

Table 7.3.4.3.4.1-2: Initial conditions for Inter-frequency cell switch from FR2 to FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.3.4.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.3.4.3.4.1-3.
2. Message contents are defined in clause 7.3.4.3.4.3.
3. Two cells are deployed in the test, which are FR2 PCell(Cell 1) and FR2 neighbour cell (Cell 2) on the different frequency than the PCell. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 7.3.4.3.4.1-3: General test parameters for Inter-frequency cell switch from FR2 to FR2

Parameter		Unit	Value				Comment
			Test 1A	Test 1B	Test 2A	Test 2B	
Initial conditions	Active cell		Cell 1				
	Neighbouring cell		Cell 2				Cell 2 is the candidate cell
Final condition	Active cell		Cell 2				
A3-Offset		dB	[-15]				
Hysteresis		dB	0				
Time To Trigger		s	0				
Filter coefficient			0				L3 filtering is not used
includeBeamMeasurements			True				
DRX			OFF				DRX is not used
Measurement gap pattern ID			gp0				As specified in TS 38.133 [6] Table 9.1.2-1
Measurement gap offset			39				
Access Barring Information		-	Not Sent				No additional delays in random access procedure.
Time offset between cells			0.3 μs				
deriveSSB-IndexFromCell			Enabled				
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	320				Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1				Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1				
	spCellInclusion		N/A				
ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		Candidate DLorJoint TCI.State.0	Candidate DLorJoint TCI.State.2	Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	As specified in clause A.10B.
	CandidateTCI-State#2		Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.3	N/A	N/A	In test 1A and 1B, CandidateTCI-State#1 and/or CandidateTCI-

ltm-UL-TCI-StatesToAddModList	CandidateTCI-UL-State#1		N/A	Candidate UL TCI.State.0	N/A	Candidate UL TCI.State.0	UL-State#1 are configured for early TCI state activation. CandidateTCI-State#2 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command. In test 2A and 2B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command.
ltm-ConfigComplete			True				Candidate cell's configuration is complete configuration
T1		s	<3				
T2		s	≤0.2				
T3		s	≤0.2				
T4		s	≤0.1				

7.3.4.3.4.2 Test procedure

Two cells are deployed in the test, which are FR2 PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the different frequency than the PCell. Test configurations are given in table 7.3.4.3.4.1-1.

Both cell switch delay and interruption length are tested by using the parameters in table 7.3.4.3.4.1-3, and 7.3.4.3.5-1.

The test consists of four successive time periods, with time durations of T1, T2, T3 and T4, respectively.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 7.3.4.3.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. SS shall transmit an RRCReconfiguration message to configure event A3 triggered measurement reporting on the intra-frequency carrier of Cell 2.

4. UE shall transmit RRCReconfigurationComplete message.

5. If the UE transmit an A3 message report, the SS shall switch the power setting from T1 to T2 as specified in Table 7.3.4.3.5-1. T2 starts.

6. At the start of T2, the SS shall transmit an *RRCReconfiguration* message with *LTM-Candidate-r18* for Cell2, and SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports on the candidate cell (Cell 2) in PUCCH format 2.

7. UE shall transmit RRCReconfigurationComplete message.

8. If the UE transmits a valid L1-RSRP result of Cell2:

   - Test 1A and 1B: The SS shall switch the power setting from T2 to T3 as specified in Table 7.3.4.3.5-1. T3 starts.

   - Test 2A and 2B: T3 is skipped. The SS shall switch the power setting from T2 to T4 as specified in Table 7.3.4.3.5-1. T4 starts, go to step10.

9. At the start of T3, the SS shall transmit the candidate cell TCI activation MAC-CE (Refer TS 38.321 [12], clauses 6.1.3.76) for Cell2. 100ms after the candidate cell TCI state activation MAC-CE transmission, the SS shall switch the power setting from T3 to T4 as specified in Table 7.3.4.3.5-1. T4 starts.

candidate cell TCI activation MAC-CE:

- Test 1A: *CandidateTCI-State#1* is activated.

- Test 1B: *CandidateTCI-State#1* and *CandidateTCI-UL-State#1* is activated.

10. The start of T4 is the instant when the last TTI containing the LTM cell switch command MAC CE(Refer TS 38.321 [12], clauses 6.1.3.75) is sent by Cell1 to the UE.

    cell switch MAC-CE:

    - Contention-Free Random-Access Resources are indicated and the field of Timing Advance Command is set to FFF

    - Test 1A: CandidateTCI-State#2 is indicated.

    - Test 1B: CandidateTCI-State#2 and CandidateTCI-UL-State#1 are indicated

    - Test 2A: CandidateTCI-State#1 is indicated.

    - Test 2B: CandidateTCI-State#1 and CandidateTCI-UL-State#1 are indicated

11. If the UE transmits the uplink PRACH channel to Cell 2 less than D_{LTM} from the beginning of time period T4 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.T4 ends.

12. After T4 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync*, which includes the release of *LTM-Config-r18*, to cause UE handover back to Cell 1.

13. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1

14. Power off Cell2 and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop. Upon setting the new physical cell identity for Cell 2, power on Cell 2 to ensure Cell 2 is available for the following test steps.

15. Repeat steps 2-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.3.4.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.3.4.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, SSB.3 FR2, SMTC.1 Table H.3.1-5 with Condition SSB Index Table H.3.1-6 with Conditions gapUE and Pattern #0 Table H.3.1-7 with Condition INTER-FREQ and SSB Index

Table 7.3.4.3.4.3-2: Common Exception messages (step 6)

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.12.1 with Condition LTM L1-RSRP Table H 3.12-2 with Condition LTM L1-RSRP Table H.3.12-3 for Cell 2 and Condition Candidate config and TCI_INFO Table H.3.12.4 Table H.3.12-5 with pucch-ResourceId = 8 Table H.3.12-6, H.3.12-7 abd H.3.12-13 with SSB index = 0 Table H.3.12-8 Table H.3.12-9 for Cell 2 Table H.3.12-10 with Condition Joint AND Early DL Sync for test 1A Table H.3.12-10 with Condition Seperate for test 1B and 2B Table H.3.12-10 with Condition Joint for test 2A Table H.3.12-11

Table 7.3.4.3.4.3-3: ReportConfigNR (step3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A3			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	[-15]	The actual value is field value * 0.5 dB	
}			
hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
reportQuantity-RsIndexes SEQUENCE {			
rsrp	true		
}			
maxReportCells	1		
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	true		
}			
}			
}			

Table 7.3.4.3.4.3-4: *RACH-ConfigCommon* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric specified in TS 38.508-1 [14] Table 7.3.1-14 with condition FR2		
totalNumberOfRA-Preambles	48		
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n16		
}			
rsrp-ThresholdSSB	RSRP_51		
prach-RootSequenceIndex CHOICE {			
0			
}			
msg1-SubcarrierSpacing	kHz 120		
}			

Table 7.3.4.3.4.3-5: *RACH-ConfigDedicated* for Contention Free Random Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	1 entry		
ssb[1]	0		
ra-PreambleIndex[1]	40		
}			
ra-ssb-OccasionMaskIndex	1		
}			
}			
}			
}			

7.3.4.3.5 Test requirements

Table 7.3.4.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.4.3.5-1: Cell specific test parameters for NR FR2-FR2 Inter frequency cell switch test case

Parameter		Unit	Cell 1	Cell 2
			T1 ~ T5	T1 ~ T5
NR RF Channel Number			1	2
Assumption for UE beams[Note 6]			Rough	Rough
AoA setup			Setup 1 as defined in A.9.1	
Duplex mode			TDD	
TDD configuration			[TDDConf.3.1]	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
BWP BW		MHz	100: $N_{RB,c}$ = 66	
PDSCH Reference			SR3.1 TDD	
CORESET Reference Channel			CR3.1 TDD	
Control Channel RMC			CCR.3.1 TDD	
CP length			Normal	
TRS configuration			TRS.2.1 TDD	
OCNG Patterns			OP.1	
SMTC Configuration			SMTC.1	
SSB Configuration			SSB.3 FR2	
PDSCH/PDCCH subcarrier spacing		kHz	120	
PUCCH/PUSCH subcarrier spacing		kHz	120	
PRACH configuration			PRACH.6 FR2	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				

EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-104.7+TT	
N_{oc} Note2		dBm/SCS	-95.7+TT	
$\hat{E}_s/I_{ot}$		dB	5+TT	5+TT
$\hat{E}_s/N_{oc}$		dB	5+TT	5+TT
SSB_RP		dBm/SCS	-90.7+TT	-90.7+TT
Io Note3		dBm/ 95.04MHz	-60.5+TT	-60.5+TT
Propagation condition		-	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 in no later than D_{LTM} from the beginning of time period T4. The rate of correct cell switches observed during repeated tests shall be at least 90%.

NOTE: The cell switch delay can be expressed as D_{LTM} (= T_{cmd} + $T_{LTM\text{-}interrupt}$), where:

T_{cmd} = T_{HARQ} + 3ms and is specified in 38.133 [6] clause 6.3.1.2.

$T_{LTM\text{-}interrupt}$ = $T_{LTM\text{-}RRC\text{-}processing}$ + $T_{LTM\text{-}processing}$ + $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$ + $T_{LTM\text{-}IU}$ ms and is specified in 38.133 [6] clause 6.3.1.2.1

- $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$= 0 ms for Test 1A and 1B, $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$= 22 ms for Test 2A and 2B
- $T_{LTM\text{-}IU_}$=20ms
- $T_{LTM\text{-}RRC\text{-}processing}$ =10 ms if UE does not support *ltm-FastProcessingConfig-r18*, otherwise $T_{LTM\text{-}RRC\text{-}processing}$ =0ms
- $T_{LTM\text{-}processing}$ =10 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 10 ms for FR2-to-FR2 cell switch in the capability
- $T_{LTM\text{-}processing}$ =15 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 15 ms for FR2-to-FR2 cell switch in the capability
- $T_{LTM\text{-}processing}$ =20 ms if the UE does not support *ltm-FastUE-Processing-r18* capability.

7.3.5 LTM PSCell Switch

7.3.5.0 Minimum conformance requirements

Same as in clause 6.3.5.0.

7.3.5.1 NR SA FR2 RACH-based Intra-frequency LTM PSCell switch

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Test applicability is missing
- Message contents are TBD
- Test procedure is missing

7.3.5.1.1 Test purpose

To verify the UE's ability to perform NR FR1-NR FR1 RACH-based intra frequency PSCell switch specified in 38.133 [6] clause 8.20 for both with and without early TCI state activation.

7.3.5.1.2 Test applicability

This test applies to all types of NR UEs supporting NR LTM for SCG with RACH from Release 18 onwards.

7.3.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.3.5.0.

The normative reference for this requirement is TS 38.133 [6] clauses 8.20 and A.7.3.5.1.

7.3.5.1.4 Test description

7.3.5.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 7.3.5.1.4.1-1.

Table 7.3.5.1.4.1-1: NR SA FR2 RACH-based Intra-frequency LTM PSCell switch test configurations

Config	Description
7.3.5.1-1	Pcell: FR1 NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Source Pscell: FR2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target Pscell: FR2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.3.5.1-2	Pcell: FR1 NR 15kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Source Pscell: FR2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target Pscell: FR2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.3.5.1-3	Pcell: FR1 NR 30 kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Source Pscell: FR2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target Pscell: FR2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 7.3.5.1.4.1-2

Table 7.3.5.1.4.1-2: Initial conditions for NR SA FR2 RACH-based Intra-frequency LTM PSCell switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.3.5.1.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.3.5.1.4.1-3 below.

Table 7.3.5.1.4.1-3: General test parameters for NR SA FR2 RACH-based Intra-frequency LTM PSCell switch

Parameter		Unit	Value				Comment
			Test 1A	Test 1B	Test 2A	Test 2B	
Initial conditions	Active cell		Cell 1, Cell 2				
	Neighbouring cell		Cell 3				Cell 3 is the candidate cell
Final condition	Active cell		Cell 1, Cell 3				
A3-Offset		dB	-30				
Hysteresis		dB	0				
Time To Trigger		s	0				
Filter coefficient			0				L3 filtering is not used
DRX			OFF				DRX is not used
Access Barring Information		-	Not Sent				No additional delays in random access procedure.
Time offset between Cell 2 and Cell 3			0.3 μs				RTD between Cell 2 and Cell 3 is less than CP
deriveSSB-IndexFromCell			Enabled				
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	320				Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1				Report candidate cell's (Cell 3) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1				
	spCellInclusion		N/A				
ltm-DL-OrJointTCI-StateToAddModList	CandidateTCI-State#1		DlorJoint TCI.State.0	DLorJoint TCI.State.2	DLorJoint TCI.State.1	DLorJoint TCI.State.3	As specified in clause A.3.16B. In test 1A and 1B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for early TCI state activation. CandidateTCI-State#2 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command. In test 2A and 2B, CandidateTCI-State#1 and/or CandidateTCI-UL-State#1 are configured for TCI state indication in cell switch command.
	CandidateTCI-State#2		DLorJoint TCI.State.1	DLorJoint TCI.State.3	N/A	N/A	
ltm-UL-TCI-StatesToAddModList	CandidateTCI-UL-State#1		N/A	UL TCI.State.0	N/A	UL TCI.State.0	
ltm-ConfigComplete			True				Candidate cell's configuration is complete configuration
T1		s	<3				
T2		s	≤0.2				
T3		s	≤0.1				
T4		s	≤0.1				

7.3.5.1.4.2 Test procedure

TBD

7.3.5.1.4.3 Message contents

TBD

7.3.5.1.5 Test requirements

Table 7.3.5.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.3.5.1.5-1: Cell specific test parameters for NR SA FR2 RACH-based Intra-frequency LTM PSCell switch

Parameter		Unit	Cell 1
			T1~T4
NR RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
DRx Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15
	Config 3		30
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15
	Config 3		30
PRACH configuration			FR1 PRACH configuration 6
BWP	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	-98+TT
N_{oc} Note2	Config 1,2	dBm/SCS	-98+TT
	Config 3		
$\hat{E}_s / I_{ot}$		dB	4+TT
$\hat{E}_s / N_{oc}$		dB	4+TT
SSB_RP	Config 1,2	dBm/SCS	-94+TT
	Config 3		-91+TT

Io[Note3]	Config 1,2	dBm/ 9.36MHz	-64.59+TT
	Config 3	dBm/ 38.16MHz	-58.49+TT
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table 7.3.5.1.5-1: Cell specific test parameters for NR SA FR2 RACH-based Intra-frequency LTM PSCell switch

Parameter		Unit	Cell 2	Cell 3
			T1 ~ T4	T1 ~ T4
NR RF Channel Number			2	2
Assumption for UE beams[Note 6]			Rough	Rough
AoA setup			Setup 1 as defined in A.3.15	
Duplex mode			TDD	
TDD configuration			TDDConf.2.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
BWP BW		MHz	100: $N_{RB,c}$ = 66	
PDSCH Reference			SR3.1 TDD	
CORESET Reference Channel			CR3.1 TDD	
Control Channel RMC			CCR.3.1 TDD	
CP length			Normal	
TRS configuration			TRS.2.1 TDD	
OCNG Patterns			OP.1	
SMTC Configuration			SMTC.1	
SSB Configuration			SSB.3 FR2	
PDSCH/PDCCH subcarrier spacing		kHz	120	
PUCCH/PUSCH subcarrier spacing		kHz	120	
PRACH configuration			FR2 PRACH configuration 6	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-104.7+TT	
N_{oc} Note2		dBm/SCS	-95.7+TT	
$\hat{E}_s / I_{ot}$		dB	-1.8+TT	0+TT
$\hat{E}_s / N_{oc}$		dB	6+TT	7+TT
SSB_RP		dBm/SCS	-88.7+TT	-89.7+TT
Io[Note3]		dBm/ 95.04MHz	-56.7+TT	-56.7+TT
Propagation condition		-	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 3 in no later than D_{LTM} from the beginning of time period T4.

The rate of correct cell switches observed during repeated tests shall be at least 90%.

NOTE: The cell switch delay can be expressed as D_{LTM} (= T_{cmd} + $T_{LTM\text{-}interrupt}$), where:

T_{cmd} = T_{HARQ} + 3 ms and is specified in clause 6.3.1.2, $T_{LTM\text{-}interrupt}$ is defined in clause 8.20.3 as $T_{LTM\text{-}interrupt}$ = $T_{LTM\text{-}RRC\text{-}processing}$ + $T_{LTM\text{-}processing}$ + $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$ + $T_{LTM\text{-}IU}$ ms.

- $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$= 0 ms for Test 1A and 1B, $T_{first\text{-}RS}$ + $T_{RS\text{-}proc}$= 22 ms for Test 2A and 2B
- $T_{LTM\text{-}IU}$=20ms,
- $T_{LTM\text{-}RRC\text{-}processing}$ = 10 ms if UE does not support *ltm-FastProcessingConfig-r18*, otherwise $T_{LTM\text{-}RRC\text{-}processing}$ =0ms
- $T_{LTM\text{-}processing}$ = 10 ms if the UE supports *ltm-FastUE-Processing-r18* capability and UE reports 10 ms for FR2-to-FR2 cell switch in the capability
- $T_{LTM\text{-}processing}$ = 15 ms if the UE supports *ltm-FastUE-Processing-r18*] capability and UE reports 15 ms for FR2-to-FR2 cell switch in the capability
- $T_{LTM\text{-}processing}$ = 20 ms if the UE does not support *ltm-FastUE-Processing-r18* capability.

7.4 Timing

7.4.1 UE transmit timing

7.4.1.0 Minimum Conformance Requirements

7.4.1.0.1 Minimum conformance requirements for UE transmit timing accuracy

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 7.4.1.0.1-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS or it is the PRACH transmission.

The UE shall meet the Te requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{TA} + N_{TA\,offset}) \times T_c$. The downlink timing is defined as the time when the first detected path (in time) of the corresponding downlink frame is received from the reference cell. N_{TA} for PRACH is defined as 0.

$(N_{TA} + N_{TA\,offset}) \times T_c$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in TS 38.133 [6] clause 7.3 was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{TA\,offset}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{TA\,offset}$ is defined in Table 7.4.1.0.1-2.

For multi-DCI based multi-TRP operation with two TAs, UE initial transmission timing error requirements specified in this clause is applicable for each TAG and shall be met for each TAG separately. The reference point for each TAG is the first detected path (in time) of [one of] the corresponding downlink reference signal(s) of the cell associated with a coresetPoolIndex having same TAG as the uplink signal [TS 38.331].

Table 7.4.1.0.1-1: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (KHz)	SCS of uplink signals (KHz)	T_e

1	15	15	12*64*T_c
		30	10*64*T_c
		60	10*64*T_c
	30	15	8*64*T_c
		30	8*64*T_c
		60	7*64*T_c
2	120	60	3.5*64*T_c
		120	3.5*64*T_c
	240	60	3*64*T_c
		120	3*64*T_c
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 7.4.1.0.1-2: The Value of $N_{\text{TA offset}}$

Frequency range and band of cell used for uplink transmission	$N_{\text{TA offset}}$ (Unit: T_C)
FR1 FDD band without LTE-NR coexistence case or FR1 TDD band without LTE-NR coexistence case	25600 (Note 1)
FR1 FDD band with LTE-NR coexistence case	0 (Note 1)
FR1 TDD band with LTE-NR coexistence case	39936 (Note 1)
FR2	13792
NOTE 1: The UE identifies $N_{\text{TA offset}}$ based on the information n-TimingAdvanceOffset according to [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{\text{TA offset}}$ is set as 25600 for FR1 band. In case of multiple UL carriers in the same TAG, UE expects that the same value of n-TimingAdvanceOffset is provided for all the UL carriers according to clause 4.2 in [3] and the value 39936 of $N_{\text{TA offset}}$ can also be provided for a FDD serving cell. NOTE 2: Void	

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell except when the timing advance in TS 38.133 [6] clause 7.3 is applied.

When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$, the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{\text{TA}} + N_{\text{TA offset}}) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q.

2) The minimum aggregate adjustment rate shall be T_p per second.

3) The maximum aggregate adjustment rate shall be T_q per 200ms.

where the maximum autonomous time adjustment step T_q and the aggregate adjustment rate T_p are specified in Table 7.4.1.0.1-3.

For multi-DCI based multi-TRP operation with two TAs, gradual timing adjustment specified in this clause applies for each TAG and shall be met for each TAG. The reference timing for each TAG is the first detected path (in time) of [one of] the corresponding downlink reference signal(s) of the cell associated with a coresetPoolIndex having same TAG as uplink signal [TS 38.331].

Table 7.4.1.0.1-3: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (KHz)	T_q	T_p
1	15	5.5*64*T_c	5.5*64*T_c
	30	5.5*64*T_c	5.5*64*T_c
	60	5.5*64*T_c	5.5*64*T_c
2	60	2.5*64*T_c	2.5*64*T_c
	120	2.5*64*T_c	2.5*64*T_c

NOTE: T_c is the basic timing unit defined in TS 38.211 [6]

The normative reference for this requirement is TS.38.133 [6] clause 7.1.2.

7.4.1.1 NR SA FR2 UE transmit timing accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC1, PC3

- The test is incomplete for UE power classes other than PC1 and PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.4.1.1.1 Test purpose

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. *highSpeedMeasFlagFR2-r17* is broadcast to UE supporting power class 6. This test will verify the requirements in clause 7.1.2 of TS 38.133 [6].

7.4.1.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting SA FR2.

7.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.4.1.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.7.4.1.1

7.4.1.1.4 Test Description

7.4.1.1.4.1 Initial Conditions

This test can be run in one of the configurations defined in Table 7.4.1.1.4.1-1.

Table 7.4.1.1.4.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz

Configure the test equipment and the DUT according to the parameters in Table 7.4.1.1.4.1-2

Table 7.4.1.1.4.1-2: Initial conditions for NR SA FR2 transmit timing accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.4.1.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.4.1.1.4.3.

2. For this test a single NR FR2 PCell (Cell 1) is used. The connection setup is performed according to the settings and power levels defined in annex C.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.4.1.1.4.2 Test procedure

The test consists of a single NR FR2 cell (PCell). The downlink timing of the PCell is changed and the changes in UE transmit timing are observed. The transmit timing is verified by the UE transmitting SRS used as a measurement reference facilitating the SS timing estimation.

The test sequence shall be carried out in RRC_CONNECTED for every test case. Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

Following will be the test sequence for this test:

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Setup NR PCell according to parameters given in Table 7.4.1.1.4.1-1.

3. The SS shall transmit an RRCConnectionReconfiguration message configuring the UE with the message content defined in clause 7.4.1.1.4.3.

4. The UE shall transmit RRCConnectionReconfigurationComplete message.

5. Set the UE in the Rx beam peak direction found with one of the Rx Beam Peak Search procedures described in Annex I. Allow at least BEAM_SELECT_WAIT_TIME (NOTE 1) for the UE Rx beam selection to complete.

6. After connection set up with the cell and during 2 seconds before DL timing adjustment, the test equipment shall monitor all SRS transmissions and verify that, for each received SRS, the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.

   a. The N_{TA} offset value (in T_c units) is 13792 for FR2

   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.4.1.1.5-4.

7. The test system shall adjust the timing of the DL path by values given in Table 7.4.1.1.4.2-1

Table 7.4.1.1.4.2-1: Adjustment Value for DL Timing

SCS of SSB signals (KHz)	Adjustment Value	
	Test1	**Test2**
240	+8*64Tc	+4*64Tc

8. The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Table 7.4.1.1.5-5. This will only be done for Test1. The test system samples the UE Transmit Timing once per SRS transmission (as per configured SRS periodicity). To check Rule 1, the SS shall check that the maximum time adjustment step size T_q between one SRS transmission to next consecutive SRS transmission of a valid UL slot is within Rule 1 as specified in clause 7.4.1.0.1 and Table 7.4.1.0.1-3. To check that the minimum adjustment rate is within Rule 2 as specified in clause 7.4.1.0.1 and Table 7.4.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 1 + offset seconds sliding window (offset in ms to the next consecutive SRS transmission), with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. To check that the maximum adjustment rate is within Rule 3 as specified in clause 7.4.1.0.1 and Table 7.4.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 200ms – offset sliding window of previous SRS transmission, with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. The three rules apply until the UE transmit timing offset is within the limits specified in 7.4.1.0.1 and Table 7.4.1.0.1-3 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1. The test system will wait till evaluation interval of T seconds is met to ensure UE transmit timing is stable at the end of the step, where T=DL_timing_change[Ts]/5.5Ts and DL_timing_change is specified in Table 7.4.1.1.4.2-1.

9. After the UE transmit timing is within the limits specified in step 7, and during 2 seconds, the test system shall monitor all SRS transmissions and verify that, for each received SRS, the UE transmit timing offset stays within

$(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

NOTE: The BEAM_SELECT_WAIT_TIME default value is defined in Annex K.1.1 in TS 38.521-2 [3].

7.4.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.4.1.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table 4.6.3-169 in TS 38.508-1 [14] with condition R17 HST FR2
Specific message contents exceptions for Test Configuration 7.4.1.1-1	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.4 FR2

Table 7.4.1.1.4.3-1: *SRS-Config* for UE transmit timing accuracy for NR SA FR2 UE

Derivation Path: TS 38.508-1 [14], Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {			
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {			
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	17		
}			
groupOrSequenceHopping	Neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
sl1	0		Test 1
sl2560	4		Test 2
}			
}			
}			
}			
}			
}			

Table 7.4.1.1.4.3-2: *DRX-Config* for UE transmit timing accuracy Test 2 for NR SA FR2

Derivation Path: TS 38.508-1 [14], Table 4.6.3-56			
Information Element	**Value/remark**	**Comment**	**Condition**
DRX-Config ::= CHOICE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms6		
}			
drx-InactivityTimer	ms1		
drx-HARQ-RTT-TimerDL	56		
drx-HARQ-RTT-TimerUL	56		

drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms320	0		
}			
shortDRX		NOT PRESENT	
}			

7.4.1.1.5 Test Requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 7.4.1.1.5-4.

The UE shall meet the Te requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{\mathrm{TA}} + N_{\mathrm{TA\,offset}}) \times T_{\mathrm{c}}$. The downlink timing is defined as the time when the first detected path (in time) of the corresponding downlink frame is received from the reference cell. N_{TA} for PRACH is defined as 0.

$(N_{\mathrm{TA}} + N_{\mathrm{TA\,offset}}) \times T_{\mathrm{c}}$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{\mathrm{TA\,offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{\mathrm{TA\,offset}}$ is defined in Table 7.4.1.1.5-5.

Table 7.4.1.1.5-1: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1	Freq1	Freq1
Duplex Mode		1	TDD	
TDD configuration		1	TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
Data RBs allocated		1	66	
Initial BWP Configuration		1	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1	DLBWP.1.1 ULBWP.1.1	
TRS Configuration		1	TRS.2.1 TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
DRx Cycle	ms	1	N/A	DRX.8[Note5]
PDSCH Reference measurement channel		1	SR.3.3 TDD	
RMSI CORESET Reference Channel		1	CR.3.2 TDD	
Dedicated CORESET Reference Channel		1	CCR.3.7 TDD	
OCNG Patterns		1	OP.1	
SSB Configuration		1	SSB.4 FR2	
SMTC Configuration		1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1	120	
EPRE ratio of PSS to SSS	dB	1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				

EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		1	AWGN	
SRS Config		1	SRSConf.1 Note6	SRSConf.2 Note6
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: DRx related parameters are given in Table A.5-1 Note 6: SRS configs are given in Table A.7.4.1.1.5-2				

Table 7.4.1.1.5-2: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	17	17	Matches $N_{RB,C}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1,0	sl2560,4	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

Table 7.4.1.1.5-3: OTA related test parameters

Parameter	Unit	Test 1	Test 2
Angle of arrival configuration		Setup 1 defined in A.9.1	
Assumption for UE beams Note 6		Fine	
N_{oc} Note1	dBm/15kHz Note4	-112	
N_{oc} Note1	dBm/SCS Note3	-100	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRP Note2	dBm/SCS Note4	-96	
$\hat{E}_s / I_{ot}$	dB	4	
Io Note2	dBm/95.04 MHz Note4	-68.5	

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: Void
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 5: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 6: Information about types of UE beam is given in TS 38.133 [6] section B.2.1.3, and does not limit UE implementation or test system implementation

Table 7.4.1.1.5-4: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_e
2	120	60	N/A
		120	N/A
	240	60	N/A
		120	3.75*64*T_c
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 7.4.1.1.5-5: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (KHz)	The Maximum timing change in one adjustment T_q	The Minimum aggregate adjustment rate T_p	The Maximum aggregate adjustment rate T_q
2	120	3.125*64*T_c	-1.225*64*T_c	+3.725*64*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]				

Table 7.4.1.1.5-6: The Value of $N_{\text{TA offset}}$

Frequency range and band of cell used for uplink transmission	$N_{\text{TA offset}}$ (Unit: T_C)
FR2	13792
NOTE 1: The UE identifies $N_{\text{TA offset}}$ based on the information n-TimingAdvanceOffset as specified in TS 38.331 [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{\text{TA offset}}$ is set as 25600 for FR1 band. In case of multiple UL carriers in the same TAG, UE expects that the same value of n-TimingAdvanceOffset is provided for all the UL carriers according to clause 4.2 in TS 38.213 [3] and the value 39936 of $N_{\text{TA offset}}$ can also be provided for a FDD serving cell.	
NOTE 2: Void	

7.4.1.2

7.4.1.3 NR SA FR2 UE Transmit Timing Test with 2-TA for FR2 UE supporting multiDCI-IntraCellMultiTRP-TwoTA-r18

Editor's note: This test case is incomplete in the following aspects:

- AoA configuration in OTA test parameters table is missing (pending in TS 38.133).

7.4.1.3.1 Test purpose

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits, for UE supporting *multiDCI-IntraCellMultiTRP-TwoTA-r18* and is configured with 2 TAGs for multi-DCI multi-TRP operation. UE is also configured with *dl-OrJointTCI-StateList*. This test will verify the requirements in clause 7.1.2 of TS 38.133 [6].

7.4.1.3.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting for UE supporting *multiDCI-IntraCellMultiTRP-TwoTA-r18* and is configured with 2 TAGs for multi-DCI multi-TRP operation. UE is also configured with *dl-OrJointTCI-StateList*.

7.4.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.4.1.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.7.4.1.3.

7.4.1.3.4 Test Description

7.4.1.3.4.1 Initial Conditions

This test can be run in one of the configurations defined in Table 7.4.1.3.4.1-1.

Table 7.4.1.3.4.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz

Configure the test equipment and the DUT according to the parameters in Table 7.4.1.3.4.1-2

Table 7.4.1.3.4.1-2: Initial conditions for NR SA FR2 transmit timing accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 7.4.1.3.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.4.1.3.4.3.
2. For this test a single NR FR2 PCell (Cell 1) is used. The connection setup is performed according to the settings and power levels defined in annex C.
3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.4.1.3.4.2 Test procedure

The test consists of a single NR FR2 cell. The downlink timing of the TRP1 is changed and the changes in UE transmit timing are observed. The transmit timing is verified by the UE transmitting SRS used as a measurement reference facilitating the SS timing estimation.

For UE not supporting the capability of “rxTimingDiff-r18”, are required to be tested in Test1 and Test3.

For UEs that support the capability of “rxTimingDiff-r18”, are required to be tested in Test2 and Test4.

The test sequence shall be carried out in RRC_CONNECTED for every test case. Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

Following will be the test sequence for this test:

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Setup NR PCell according to parameters given in Table 7.4.1.3.4.1-1.

3. The SS shall transmit an *RRCConnectionReconfiguration* message configuring the UE with the message content defined in clause 7.4.1.3.4.3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

5. Set the UE in the Rx beam peak direction found with one of the Rx Beam Peak Search procedures described in Annex I. Allow at least BEAM_SELECT_WAIT_TIME (NOTE 1) for the UE Rx beam selection to complete.

6. After connection set up with the cell and during 2 seconds before DL timing adjustment, the test equipment shall monitor all SRS transmissions and verify that, for each received SRS, the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of the corresponding downlink reference signal(s) of the cell associated with a coresetPoolIndex having same TAG as the uplink signal, where N_{TA} is commanded by the network independently for each TAG as defined in TS 38.331[12].

7. The test system shall adjust the timing of the DL path by values given in Table 7.4.1.3.4.2-1 for only TRP#1. The timing of the DL path of TRP#2 is not changed.

Table 7.4.1.3.4.2-1: Adjustment Value for DL Timing

SCS of SSB signals (KHz)	Adjustment Value	
	Test1&Test2	Test3&Test4
240	+8*64Tc	+4*64Tc

8. The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Table 7.4.1.3.5-6. This will only be done for Test1 and Test2. The test system samples the UE Transmit Timing once per SRS transmission (as per configured SRS periodicity). To check Rule 1, the SS shall check that the maximum time adjustment step size T_q between one SRS transmission to next consecutive SRS transmission of a valid UL slot is within Rule 1.To check that the minimum adjustment rate is within Rule 2,the SS shall measure the change in SRS transmission timing over a 1 + offset seconds sliding window (offset in ms to the next consecutive SRS transmission), with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. To check that the maximum adjustment rate is within Rule 3,the SS shall measure the change in SRS transmission timing over a 200ms – offset sliding window of previous SRS transmission, with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. The three rules, as specified in clause 7.4.1.0.1 and Table 7.4.1.0.1-3 are applied until the UE transmit timing offset is within the limits specified in same clause with respect to the first detected path (in time) of the corresponding downlink frame of TRP1. The test system will wait till evaluation interval of T seconds is met to ensure UE transmit timing is stable at the end of the step, where T=DL_timing_change[Ts]/5.5Ts and DL_timing_change is specified in Table 7.4.1.3.4.2-1.

9. After the UE transmit timing is within the limits specified in step 7, and during 2 seconds, the test system shall monitor all SRS transmissions and verify that, for each received SRS, the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of the corresponding downlink reference signal(s) of the cell associated with a coresetPoolIndex having same TAG as the uplink signal. For Test 3 and Test 4 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

NOTE: The BEAM_SELECT_WAIT_TIME default value is defined in Annex K.1.1 in TS 38.521-2 [3].

7.4.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.4.1.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Specific message contents exceptions for Test Configuration 7.4.1.3-1	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.1 FR2

Table 7.4.1.3.4.3-2: *SRS-Config* for UE transmit timing accuracy for NR SA FR2 UE

Derivation Path: TS 38.508-1 [14], Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {			
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {			
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	17		
}			
groupOrSequenceHopping	Neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
Sl2	0		Test 1
Sl2	1		Test 2
sl2560	4		Test 3
sl2560	9		Test 4
}			
}			
}			
}			
}			
}			

Table 7.4.1.3.4.3-3: *DRX-Config* for UE transmit timing accuracy Test 2 for NR SA FR2

Derivation Path: TS 38.508-1 [14], Table 4.6.3-56			
Information Element	**Value/remark**	**Comment**	**Condition**
DRX-Config ::= CHOICE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms6		
}			
drx-InactivityTimer	ms1		
drx-HARQ-RTT-TimerDL	56		
drx-HARQ-RTT-TimerUL	56		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms320	0		
}			
shortDRX		NOT PRESENT	
}			

Table 7.4.1.3.4.3-4: PDSCH-Config for UE transmit timing accuracy

Derivation Path: TS 38.508-1 [14], table 4.6.3-100			
Information Element	**Value/remark**	**Comment**	**Condition**
dl-OrJointTCI-StateList-r17 CHOICE {			
explicitlist SEQUENCE {			

dl-OrJointTCI-StateToAddModList-r17 SEQUENCE (SIZE (1..maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[1] SEQUENCE {		entry 1	
tci-StateId	0		
qcl-Type1 SEQUENCE {			
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			
qcl-Type	typeD		
}			
additionalPCI-r17	Not present		
pathlossReferenceRS-Id-r17	Not present		
}			
TCI-State[2] SEQUENCE {		entry 2	
tci-StateId	1		
qcl-Type1 SEQUENCE {			
referenceSignal CHOICE {			
Ssb	SSB-Index of SSB #1		
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			
qcl-Type	typeD		
}			
additionalPCI-r17	Not present		
pathlossReferenceRS-Id-r17	Not present		
}			
}			
dl-OrJointTCI-StateToReleaseList-r17	Not present		
}			
}			

7.4.1.3.5 Test Requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 7.4.1.3.5-5. The adjustment step size and the adjustment rate shall conform to the conditions outlined in clause 7.4.1.0.1. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{TA} + N_{TA_offset}) \times T_c$. The downlink timing is defined as the time when the first detected path(in time) of DL SSB of each TAG is received from the reference cell at the UE antenna. N_{TA_offset} is defined in Table 7.4.1.3.5-7.

Table 7.4.1.3.5-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1		Test2		Test3		Test4		Band Group
			TRP #1	TRP #2	TRP #1	TRP #2	TRP #1	TRP #2	TRP #1	TRP #2	
SSB ARFCN		1,2	Freq1								

Duplex Mode		1,2	TDD								
TDD configuration		1,2	TDDConf.3.1								
$BW_{channel}$	MHz	1,2	100: $N_{RB,c}$ = 66								
Data RBs allocated		1,2	66								
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1								
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1								
TRS Configuration		1,2	TRS.2.1 TDD TRS.2.2 TDD								
DRx Cycle	ms	1,2	N/A				DRX.8[Note5]				
PDSCH Reference measurement channel		1,2	SR.3. 3 TDD								
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD								
coresetPoolIndex for dedicated CORESET Reference Channel		1,2	0	1	0	1	0	1	0	1	
Dedicated CORESET Reference Channel		1,2	CCR.3.4 TDD	CCR.3.6 TDD	CCR.3.4 TDD	CCR.3.6 TDD	CCR.3.4 TDD	CCR.3.6 TDD	CCR.3.4 TDD	CCR.3.6 TDD	
TCI configuration		1,2	DLorJointTCI.State.0 with tag-Id-ptr-r18 = n0	DLorJointTCI.State.1 with tag-Id-ptr-r18 = n1	DLorJointTCI.State.0 with tag-Id-ptr-r18 = n0	DLorJointTCI.State.1 with tag-Id-ptr-r18 = n1	DLorJointTCI.State.0 with tag-Id-ptr-r18 = n0	DLorJointTCI.State.1 with tag-Id-ptr-r18 = n1	DLorJointTCI.State.0 with tag-Id-ptr-r18 = n0	DLorJointTCI.State.1 with tag-Id-ptr-r18 = n1	
Timing difference compared to TRP#1	us	1,2	0	0.1	0	8	0	0.1	0	8	
OCNG Patterns		1,2	O P. 1								
SSB Configuration		1,2	SSB.1 FR2								
SMTC Configuration		1,2	SMTC.1								
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120								

EPRE ratio of PSS to SSS	dB	1,2	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
Propagation condition		1,2	AWGN		
SRS Config		1,2	SRSConf.1[Note6]	SRSConf.2[Note6]	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: DRx related parameters are given in 38.133 [6] Table A.3.3.8-1
Note 6: SRS configs are given in 38.133 [6] Table A.5.4.1.x.1-3

Table 7.4.1.3.5-3: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1		SRSConf.2		Comments
SRS-ResourceSet	srs-ResourceSetId	0	1	0	1	
	srs-ResourceIdList	0	1	0	1	
	resourceType	Periodic	Periodic	Periodic	Periodic	
	Usage	Codebook	Codebook	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	1	0	0	
	nrofSRS-Ports	Port1	Port1	Port1	Port1	
	transmissionComb	n2	n2	n2	n2	
	combOffset-n2	0	0	0	0	
	cyclicShift-n2	0	0	0	0	
	resourceMapping startPosition	0	0	0	0	
	resourceMapping nrofSymbols	n1	n1	n1	n1	

resourceMapping repetitionFactor	n1	n1	n1	n1	
freqDomainPosition	0	0	0	0	
freqDomainShift	0	0	0	0	
freqHopping c-SRS	17	17	17	17	Matches $N_{RB,c}$
freqHopping b-SRS	0	0	0	0	
freqHopping b-hop	0	0	0	0	
groupOrSequenceHopping	Neither	Neither	Neither	Neither	
resourceType	Periodic	Periodic	Periodic	Periodic	
periodicityAndOffset-p	sl2, 0	sl2, 1	sl2560, 4	sl2560, 9	Offset to align with DRx periodicity
sequenceId	0	0	0	0	Any 10 bit number
TCI state	DLorJoint TCI.State.0	DLorJoint TCI.State.1	DLorJoint TCI.State.0	DLorJoint TCI.State.1	

Table 7.4.1.3.5-4: OTA related test parameters

Parameter	Unit	Test 1	Test 2
Angle of arrival configuration		Setup 3 as defined in clause A.9.3 Note 7	
Assumption for UE beams Note 6		Fine	
N_{oc} Note1	dBm/15kHz Note4	-112	
N_{oc} Note1	dBm/SCS Note3	-100	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRP Note2	dBm/SCS Note4	-96	
$\hat{E}_s / I_{ot}$	dB	4	
Io Note2	dBm/95.04 MHz Note4	-68.5	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7: AoA1 for TRP1 and AoA2 for TRP2

Table 7.4.1.3.5-5: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_e
2	240	120	$3*64*T_c$
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 7.4.1.3.5-6: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (KHz)	The Maximum timing change in one adjustment T_q	The Minimum aggregate adjustment rate T_p	The Maximum aggregate adjustment rate T_q
2-1	120	3.125*64*T_c	-1.225*64*T_c	+3.725*64*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]				

Table 7.4.1.3.5-7: The Value of $N_{TA\ offset}$

Frequency range and band of cell used for uplink transmission	$N_{TA\ offset}$ (Unit: Tc)
FR2	13792
NOTE 1: The UE identifies $N_{TA\ offset}$ based on the information n-TimingAdvanceOffset as specified in TS 38.331 [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{TA\ offset}$ is set as 25600 for FR1 band. In case of multiple UL carriers in the same TAG, UE expects that the same value of n-TimingAdvanceOffset is provided for all the UL carriers according to clause 4.2 in TS 38.213 [3] and the value 39936 of $N_{TA\ offset}$ can also be provided for a FDD serving cell.	
NOTE 2: Void	

7.4.2 UE timer accuracy

FFS.

7.4.3 Timing advance

7.4.3.0 Minimum conformance requirements

7.4.3.0.1 Minimum conformance requirements for timing advance adjustment accuracy

The timing advance is initiated from gNB with MAC message that implies and adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [12].

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 7.4.3.0.3-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS38.213 [8].

Table 7.4.3.0.3-1: UE Timing Advance adjustment accuracy

Sub Carrier Spacing, SCS kHz	15	30	60	120
UE Timing Advance adjustment accuracy	±256 T_c	±256 T_c	±128 T_c	±32 T_c

The normative reference for this requirement is TS.38.133 [6] clause A.7.4.3.

7.4.3.1 NR SA FR2 timing advance adjustment accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC1, PC3
- The test is incomplete for UE power classes other than PC1 and PC3
- The test is incomplete for test frequencies > 40.8 GHz

7.4.3.1.1 Test purpose

The purpose of the test is to verify UE timing advance adjustment delay and accuracy requirement defined in clause 7.3 of TS 38.133 [6].

7.4.3.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward, supporting SA FR2.

7.4.3.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.4.3.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.7.4.3.1.

7.4.3.1.4 Test description

7.4.3.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2 [17].

This test shall be tested using any of the test configurations in Table 7.4.3.1.4.1-1.

Table 7.4.3.1.4.1-1: NR SA FR2 timing advance adjustment accuracy supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.4.3.1.4.1-2

Table 7.4.3.1.4.1-2: Initial conditions for NR SA FR2 timing advance adjustment accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.4.3.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 7.4.3.1.4.1-3: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1 of TS 38.133 [6]
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1 of TS 38.133 [6]
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1 of TS 38.133 [6]
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1 of TS 38.133 [6]
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2

Timing Advance Command (T_A) value during T2		39	For 120 kHz SCS $N_{TA_new} = N_{TA_old}$ + 1024*T_c (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

1. Message contents are defined in clause 7.4.3.1.4.3.
2. For this test a single NR FR2 PCell (Cell 1) is used. The connection setup is performed according to the settings and power levels defined in annex C.
3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.4.3.1.4.2 Test Procedure

The test consists of a single NR FR2 cell, Cell 1, which is the PCell in the primary Timing Advance Group (pTAG). The test consists of two successive time periods, with time durations of T1 and T2 respectively. In each time period, timing advance commands for pTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in Table 7.4.3.1.5-1 and Table 7.4.3.1.5-2, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PCell in pTAG. The UE Time Alignment Timer (timeAlignmentTimer IE), described in Clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Message contents are defined in clause 7.4.3.1.4.3.
2. Set the parameters according to values in Tables 7.4.3.1.4.1-3 and Table 7.4.3.1.5-1 as appropriate. Propagation conditions are set according to clause C.2.2.
3. SS shall transmit an RRCConnectionReconfiguration message.
4. The UE shall transmit RRCConnectionReconfigurationComplete message.
5. During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for pTAG, as specified in Clause 6.1.3.4 in TS 38.321. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for pTAG used by the UE is established.
6. During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for pTAG, with Timing Advance Command value of 39 as specified in table 7.4.3.1.4.1-3.
7. This value shall result in changes of the timing advance for pTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.
8. As specified in Clause 7.3.2.1 of TS 38.133 [6], the UE adjusts its uplink timing at slot n+k+1 for a timing advance command received in slot n. This delay shall be considered when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.
9. The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.
10. The result from the SRS and adjustment of the timing advance in step 7) is used to measure that the UE adjusts the timing of its transmission with a relative accuracy better than or equal to value specified in Table 7.4.3.0.3-1 to the signalled timing advance value compared to the timing of preceding uplink transmission.
11. If the UE adjusts the timing of its transmission within a relative accuracy greater than or equal to value specified in Table 7.4.3.0.3-1 to the signalled timing advance value compared to the timing of preceding uplink transmission then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

12. The SS shall transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

13. After the RRC connection release, the SS transmits a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State RRC_CONNECTED according to TS 38.508-1 [14] clause 4.5 or if the paging fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED according to TS 38.508-1 [14] clause 4.5. Message contents are set as defined in clause 7.4.3.1.4.3.

14. Repeat steps 2-13 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.4.3.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3, with the following exceptions:

Table 7.4.3.1.4.3-0: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1
Specific message contents exceptions for Test Configuration 7.4.1.1-1	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.3 FR2

Table 7.4.3.1.4.3-1: SRS-Config for NR SA FR2 timing advance adjustment accuracy

Derivation Path: TS 38.508-1 [14], Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {	1 entry		
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {	1 entry		
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	16		
}			
groupOrSequenceHopping	Neither		
resourceType CHOICE {			
periodic SEQUENCE {	Periodic		
periodicityAndOffset-p CHOICE {			
sl5	4		
}			
}			
}			
}			
}			
}			

7.4.3.1.5 Test Requirement

The UE shall apply the signalled Timing Advance value for PCell in pTAG to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k = 11$.

The Timing Advance adjustment accuracy for PCell in pTAG shall be within the limits specified in Table 7.4.3.1.5-3.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90% with a confidence level of 95%.

Table 7.4.3.1.5-1, Table 7.4.3.1.5-1a and Table 7.4.3.1.5-2 define the primary level settings.

Table 7.4.3.1.5-1: Cell specific test parameters for timing advance

Parameter	Unit	Test1	
		T1	T2
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
BWP BW	MHz	100: $N_{RB,c}$ = 66	
DRx Cycle	ms	Not Applicable	
PDSCH Reference measurement channel		SR.3.1 TDD	
CORESET Reference Channel		CR.3.1 TDD	
OCNG Patterns		OCNG pattern 1	
TRS configuration		TRS.2.1 TDD	
PDSCH/PDCCH TCI state		TCI.State.2	
SMTC configuration		SMTC.1	
SSB Configuration		SSB.3 FR2	
PDSCH/PDCCH subcarrier spacing	kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	kHz	120 kHz	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition	-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Table 7.4.3.1.5-1a: OTA specific test parameters for timing advance

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 as defined in A.9	
Assumption for UE beams[Note 6]		Fine	
N_{oc} [Note1]	dBm/15kHz[Note4]	-112	
N_{oc} [Note1]	dBm/SCS[Note3]	-103	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRP[Note2]	dBm/SCS [Note4]	-99	
$\hat{E}_s / I_{ot}$	dB	4	
Io[Note2]	dBm/95.04 MHz [Note4]	-68.5	

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 5: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 6: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 7.4.3.1.5-2: Sounding Reference Symbol Configuration for timing advance

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
NOTE: For further information see clause 6.3.2 in TS 38.331 [13].		

Table 7.4.3.1.5-3: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	60	120
UE Timing Advance adjustment accuracy	±128 T_c	±72 T_c

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

7.5 Signalling characteristics

7.5.1 Radio link monitoring

7.5.1.0 Minimum conformance requirements

7.5.1.0.1 Minimum conformance requirements for out-of-sync SSB-based RLM

Same as section 5.5.1.0.1

7.5.1.0.2 Minimum conformance requirements for in-sync SSB-based RLM

Same as section 5.5.1.0.2

7.5.1.0.3 Minimum conformance requirements for out-of-sync CSI-RS based RLM

Same as section 5.5.1.0.3

7.5.1.0.4 Minimum conformance requirements for in-sync CSI-RS based RLM

Same as section 5.5.1.0.4

7.5.1.0.5 Minimum conformance requirements for UE scheduling restrictions during radio link monitoring

[TS 38.133, clause 8.1.7.3]

The following scheduling restriction applies due to radio link monitoring on an FR2 serving PCell and/or PSCell.

- If the RLM-RS is CSI-RS which is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON,
  - There are no scheduling restrictions due to radio link monitoring based on the CSI-RS.
- Otherwise
  - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for RLM; and

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for RLM.

7.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.5.1.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in TS 38.133 [6] clause 8.1.

7.5.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting 5GS NR SA FR2.

7.5.1.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.1.1.

7.5.1.1.4 Test description

In the test, UE is configured to perform RLM on SSB, with detectionResource included in RadioLinkMonitoringRS set to SSB#0 and SSB#1, and purpose set to 'rlf'. Supported test configurations are shown in table 7.5.1.1.4.1-1. The test parameters are given in Tables 7.5.1.1.4.1-3, 7.5.1.1.5-1, and 7.5.1.1.5-2 below. There is one cell (Cell 1), which is the active NR cell, in the test.

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 7.5.1.1.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure 7.5.1.1.4-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In addition to RLM-RS radio link monitoring using SSB index 0 and SSB index 1, the UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

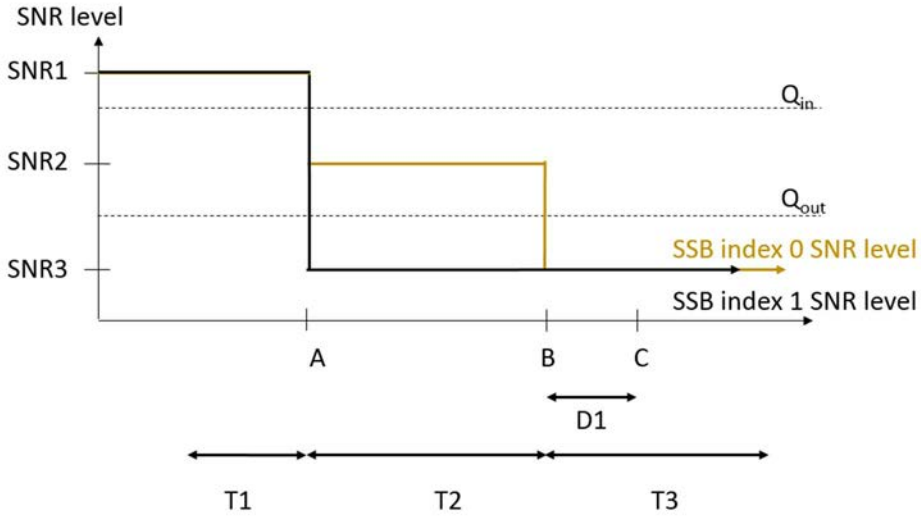

Figure 7.5.1.1.4-1: SNR variation for out-of-sync testing

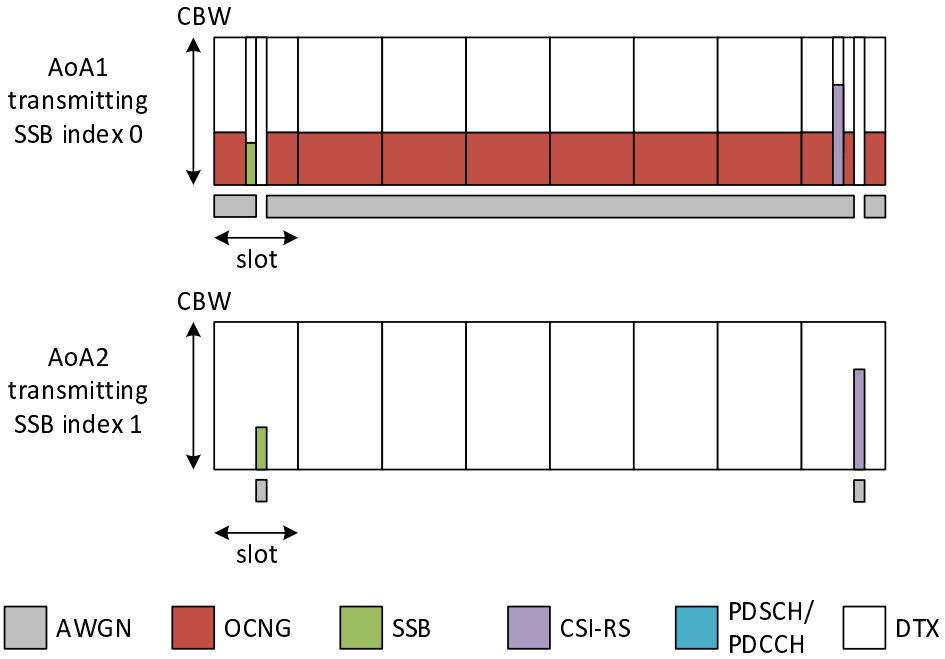

Figure 7.5.1.1.4-2: Time multiplexed downlink transmissions

7.5.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2 [18].

This test shall be tested using any of the test configurations in Table 7.5.1.1.4.1-1.

Table 7.5.1.1.4.1-1: Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode supported test configurations for FR2 PCell

Configuration	Description
7.5.1.1-1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Configure the test equipment and the DUT according to the parameters in Table 7.5.1.1.4.1-2

Table 7.5.1.1.4.1-2: Initial conditions for Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell are given in Table 7.5.1.1.4.1-3

2. Message contents are defined in clause 7.5.1.1.4.3.

3. There is one carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.1.1.4.1-3: General test parameters for FR2 out-of-sync testing in non-DRX mode

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1		24
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.4 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		PRACH.1 FR2
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.5
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				*gp0*
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1		CSI-RS.3.1 TDD Note 3
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1		TRS.2.1 TDD
T1			s	0.2
T2			s	9.68
T3			s	9.68
D1			s	9.64

Note 1: All configurations are assigned to the UE prior to the start of time period T1.
Note 2: UE-specific PDCCH is not transmitted after T1 starts.
Note 3: CSI-RS.3.1 TDD uses 2 antenna ports, which implies the SS shall transmit signal on both polarizations.

7.5.1.1.4.2 Test Procedure

There is one cell (Cell 1), which is the active NR cell, in the test. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 (PCell). The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.5.1.1.4.1-3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.5.1.1.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.1.1.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.1.1.5-1. T3 starts.

5. If the SS:

   a) detects uplink power in each subframe configured for CQI transmission (according to configured CQI periodicity on PUCCH [format 2]) during the period from time point A to time point B

   and

   b) does not detect any uplink power from time point C ([240] ms after the start of T3) until T3 expires,

   the number of successful tests is increased by one.

6. Otherwise the number of failed tests is increased by one and proceed to Step 10.

7. When T3 expires the SS shall change the SNR value to T1 as specified in Table 7.5.1.1.5-1.

8. If the UE has not re-established the connection in at least 1s, the SS shall transmit [FFS] according to [FFS] to add NR cell (PCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

9. If the Reconfiguration fails, switch off and on the UE and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.1.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.1.1.4.3-1: Common Exception messages for Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of Adjacent range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-6 with Condition RLM Table H.3.1-7 Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.5.1.1.4.3-1: Void

Table 7.5.1.1.4.3-2: UE-TimersAndConstants

Derivation Path: TS 38.508-1 [14], Table 4.6.3-200			
Information Element	**Value/remark**	**Comment**	**Condition**
UE-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

Table 7.5.1.1.4.3-3: Void

7.5.1.1.5 Test Requirement

Table 7.5.1.1.4.1-3 and 7.5.1.1.5-1 define the primary level settings including test tolerances for Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode.

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

Table 7.5.1.1.5-1: OTA related cell specific test parameters for FR2 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		**Unit**	**Test 1**					
			T1	**T2**	**T3**	**T1**	**T2**	**T3**
AoA setup			Setup 3 defined in A.9.3					
			AoA1			AoA2		
Assumption for UE beams Note 5			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1	dB	4.1 Note 6	-3.9 Note 6	-15			
ssb-Index 1 SNR	Config 1		Not sent			4.1 Note 6	-15	-15
N_{oc}	Config 1	dBm/ 15kHz	-94.8			-94.8		
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure 7.5.1.1.4-2					
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is 38.133 [6] A.3.6.
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

Table 7.5.1.1.5-2: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0

7.5.1.2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.5.1.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in TS 38.133 [6] clause 8.1.

7.5.1.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting 5GS NR SA FR2.

7.5.1.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.1.2.

7.5.1.2.4 Test description

In the test, UE is configured to perform RLM on SSB, with detectionResource included in RadioLinkMonitoringRS set to SSB#0 and SSB#1, and purpose set to ‘rlf’. Supported test configurations are shown in table 7.5.1.2.4-1. The test parameters are given in Tables 7.5.1.2.4.1-3 and 7.5.1.2.5-1 below. There is one cell (Cell 1), which is the active cell, in the test.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.1.2.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure 7.5.1.2.4-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

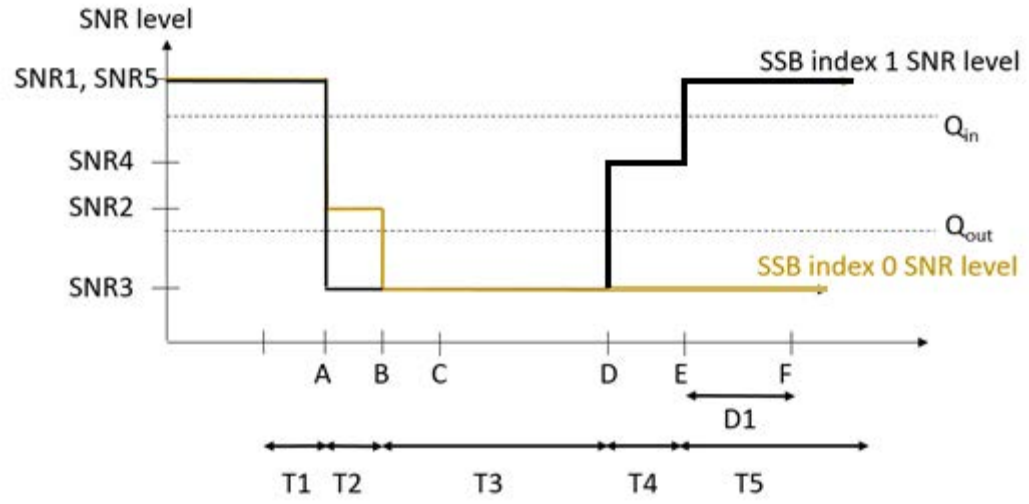

Figure 7.5.1.2.4-1: SNR variation for in-sync testing

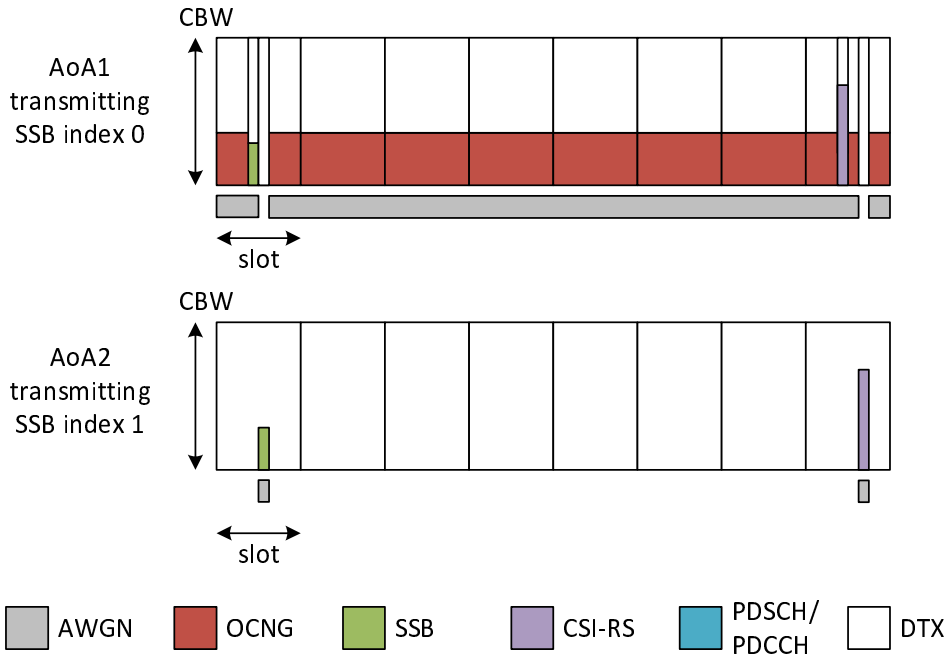

Figure 7.5.1.2.4-2: Time multiplexed downlink transmissions

7.5.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2 [18].

This test shall be tested using any of the test configurations in Table 7.5.1.2.4.1-1.

Table 7.5.1.2.1-1: Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode supported test configurations for FR2 PCell

Configuration	Description
7.5.1.2-1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Configure the test equipment and the DUT according to the parameters in Table 7.5.1.2.4.1-2

Table 7.5.1.2.4.1-2: Initial conditions for Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell are given in Table 7.5.1.2.4.1-3

2. Message contents are defined in clause 7.5.1.2.4.3.

3. There is one carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.1.2.4.1-3: General test parameters for FR2 in-sync testing in non-DRX mode

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1		24
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.1 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.3
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		PRACH.1 FR2
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.5
CP length				Normal
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD Note 3
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.88
T4		s	0.2
T5		s	3.84
D1		s	3.8
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: CSI-RS.3.1 TDD uses 2 antenna ports, which implies the SS shall transmit signal on both polarizations.			

7.5.1.2.4.2 Test Procedure

Editor's Note: Test procedure updates to ensure accurate FR2 test measurement state is TBD

There is one cell (Cell 1), which is the active NR cell, in the test. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 (PCell). The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.5.1.2.4.1-3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.5.1.2.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.1.2.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.1.2.5-1. T3 starts.

5. When T3 expires, the SS shall change the SNR value to T4 as specified in Table 7.5.1.2.5-1. T4 starts.

6. When T4 expires, the SS shall change the SNR value to T5 as specified in Table 7.5.1.2.5-1. T5 starts.

7. If the SS detects uplink power in the On-duration part of every DRX cycle in the subframe according the configured CQI reporting mode (PUCCH 2-0) during the period from time point A to time point F ([1120] ms after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.1.2.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.1.2.4.3-1: Common Exception messages for Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of Adjacent range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-6 with Condition RLM Table H.3.1-7 Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.3

Table 7.5.1.2.4.3-2: Void

Table 7.5.1.2.4.3-3: *RLF-TimersAndConstant*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms4000		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

Table 7.5.1.2.4.3-4: Void

7.5.1.2.5 Test Requirement

Table 7.5.1.2.4.1-3 and 7.5.1.2.5-1 define the primary level settings including test tolerances for Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

Table 7.5.1.2.5-1: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1									
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup			Setup 3 defined in A.9.3									
			AoA1					AoA2				
Assumption for UE beams Note 5			Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0									
EPRE ratio of PBCH DMRS to SSS		dB										
EPRE ratio of PBCH to PBCH DMRS		dB										
EPRE ratio of PSS to SSS		dB										
EPRE ratio of PDSCH DMRS to SSS		dB										
EPRE ratio of PDSCH to PDSCH DMRS		dB										
EPRE ratio of OCNG DMRS to SSS		dB										
EPRE ratio of OCNG to OCNG DMRS		dB										
ssb-Index 0 SNR	Config 1	dB	4.1 Note 6	-3.9 Note 6	-15	-15	-15					
ssb-Index 1 SNR	Config 1		Not sent					4.1 Note 6	-15	-15	-4.5	4.1 Note 6
N_{oc}	Config 1	dBm/ 15kHz	-94.8					-94.8				
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure 7.5.1.2.4-2									
Propagation condition			TDL-A 30ns 75Hz					TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is 38.133 [6] A.3.6.
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

7.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.5.1.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in TS 38.133 [6] clause 8.1.

7.5.1.3.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting 5GS NR SA FR2 and long DRX cycle.

7.5.1.3.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause 7.5.1.3.

7.5.1.3.4 Test description

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table 7.5.1.3.4.1-1. The test parameters are given in Tables 7.5.1.3.4.1-3 and 7.5.1.3.5-1 below. There is one cell (Cell 1), which is the active NR cell, in the test.

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 7.5.1.3.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

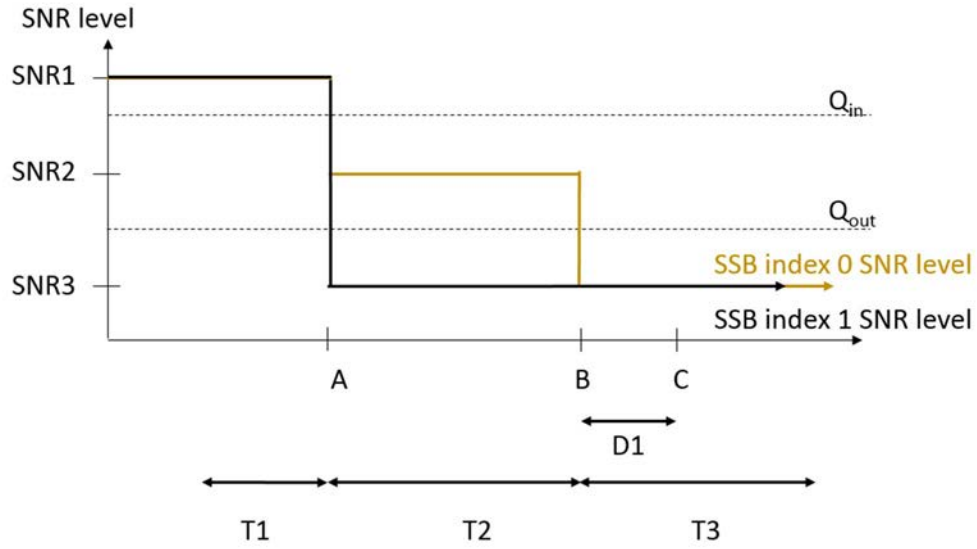

Figure 7.5.1.3.4-1: SNR variation for out-of-sync testing

7.5.1.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2 [18].

This test shall be tested using any of the test configurations in Table 7.5.1.3.4.1-1.

Table 7.5.1.3.4.1-1: Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode supported test configurations for FR2 PCell

Configuration	Description
7.5.1.3-1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Configure the test equipment and the DUT according to the parameters in Table 7.5.1.3.4.1-2

Table 7.5.1.3.4.1-2: Initial conditions for Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell are given in Table 7.5.1.3.4.1-3

2. Message contents are defined in clause 7.5.1.3.4.3.

3. There is one carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.1.3.4.1-3: General test parameters for FR2 out-of-sync testing in DRX mode

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1		66
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.4 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		PRACH.1 FR2
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.1
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4

	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	14.48
T3		s	14.48
D1		s	14.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

7.5.1.3.4.2 Test Procedure

There is one cell (Cell 1), which is the active NR cell, in the test. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 (PCell). The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.5.1.3.4.1-3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.5.1.3.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.1.3.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.1.3.5-1. T3 starts.

5. If the SS:

   a) detects uplink power in each subframe configured for CQI transmission (according to configured CQI periodicity on PUCCH [format 2]) during the period from time point A to time point B

   and

   b) does not detect any uplink power from time point C ([240] ms after the start of T3) until T3 expires,

   the number of successful tests is increased by one.

6. Otherwise the number of failed tests is increased by one and proceed to Step 10.

7. When T3 expires the SS shall change the SNR value to T1 as specified in Table 7.5.1.3.5-1.

8. If the UE has not re-established the connection in at least 1s, the SS shall transmit [FFS] according to [FFS] to add NR cell (PCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

9. If the Reconfiguration fails, switch off and on the UE and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.1.3.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.1.3.4.3-1: Common Exception messages for Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-7 Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table H.3.7-1 with condition DRX.3 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.5.1.3.4.3-1: Void

Table 7.5.1.3.4.3-2: UE-TimersAndConstants

Derivation Path: TS 38.508-1 [14], Table 4.6.3-200			
Information Element	**Value/remark**	**Comment**	**Condition**
UE-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

Table 7.5.1.3.4.3-3: Void

7.5.1.3.5 Test Requirement

Table 7.5.1.3.4.1-3 and 7.5.1.3.5-1 define the primary level settings including test tolerances for Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode.

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

Table 7.5.1.3.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
AoA setup		Setup 1 defined in A.9.1		
Assumption for UE beams Note 5		Rough		
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB	0		
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PSS to SSS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			

EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
ssb-Index 0 SNR	Config 1	dB	3.3 Note 6	-4.7 Note 6	-15.4
ssb-Index 1 SNR	Config 1		3.3 Note 6	-15.4	-15.4
N_{oc}	Config 1	dBm/15K Hz	-104.7dBm		
Propagation condition			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband.

7.5.1.4 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.5.1.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in TS 38.133 [6] clause 8.1.

7.5.1.4.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting 5GS NR SA FR2 and long DRX cycle.

7.5.1.4.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause 7.5.1.4.

7.5.1.4.4 Test description

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.7.5.1.4.1-1. The test parameters are given in Tables 7.5.1.4.4.1-3 and 7.5.1.4.5-1 below. There is one cell (Cell 1), which is the active NR cell, in the test.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.1.4.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

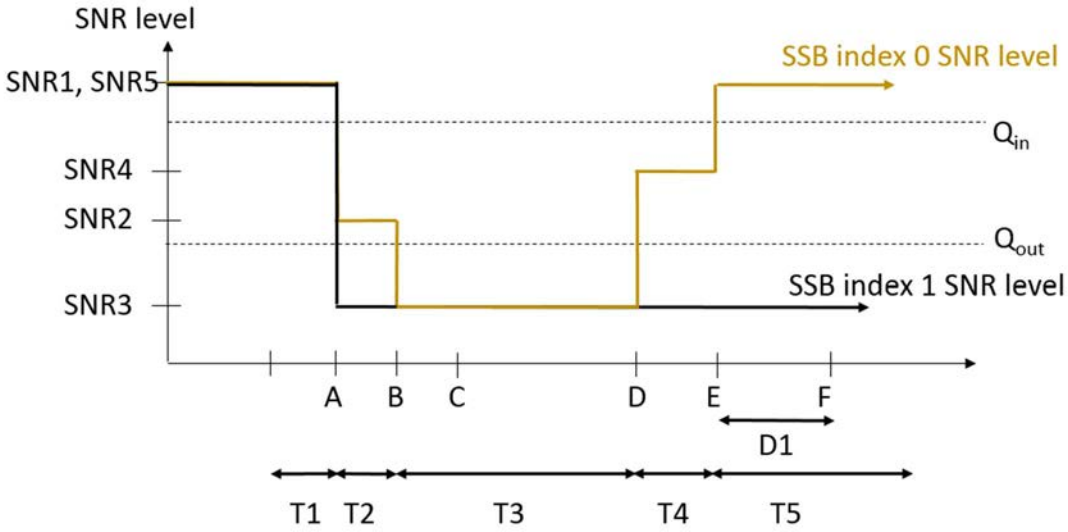

Figure 7.5.1.4.4-1: SNR variation for in-sync testing

7.5.1.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2 [18].

This test shall be tested using any of the test configurations in Table 7.5.1.4.4.1-1.

Table 7.5.1.4.4.1-1: Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode supported test configurations for FR2 PCell

Configuration	Description
7.5.1.4-1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Configure the test equipment and the DUT according to the parameters in Table 7.5.1.4.4.1-2

Table 7.5.1.4.4.1-2: Initial conditions for Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.1.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell are given in Table 7.5.1.4.4.1-3
2. Message contents are defined in clause 7.5.1.4.4.3.

3. There is one carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.1.4.4.1-3: General test parameters for FR2 in-sync testing in DRX mode

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1		66
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.1 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.3
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		PRACH.1 FR2
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.1
CP length				Normal
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.11
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	4000
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1		TRS.2.1 TDD
T1			s	0.2
T2			s	0.2

T3	s	2.8
T4	s	0.2
T5	s	3.88
D1	s	3.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.		

7.5.1.4.4.2 Test Procedure

Editor's Note: Test procedure updates to ensure accurate FR2 test measurement state is TBD

There is one cell (Cell 1), which is the active NR cell, in the test. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 (PCell). The UE shall be configured for periodic CQI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.5.1.4.4.1-3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.5.1.4.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.1.4.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.1.4.5-1. T3 starts.

5. When T3 expires, the SS shall change the SNR value to T4 as specified in Table 7.5.1.4.5-1. T4 starts.

6. When T4 expires, the SS shall change the SNR value to T5 as specified in Table 7.5.1.4.5-1. T5 starts.

7. If the SS detects uplink power in the On-duration part of every DRX cycle in the subframe according the configured CQI reporting mode (PUCCH 2-0) during the period from time point A to time point F ([1120] ms after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

8. Repeat steps 2-7 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.1.4.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.1.4.4.3-1: Common Exception messages for Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-7 Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table H.3.7-1 with condition DRX.3 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.5.1.4.4.3-2: Void

Table 7.5.1.4.4.3-3: *RLF-TimersAndConstant*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			

t310	ms4000		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

Table 7.5.1.4.4.3-4: Void

7.5.1.4.5 Test Requirement

Table 7.5.1.4.4.1-3 and 7.5.1.4.5-1 define the primary level settings including test tolerances for Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

Table 7.5.1.4.5-1: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring test in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.9.1				
Assumption for UE beams Note 5			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
ssb-Index 0 SNR	Config 1	dB	3.3 Note 6	-4.7 Note 6	-15.4	-4.9	3.3 Note 6
ssb-Index 1 SNR	Config 1		3.3 Note 6	-15.4	-15.4	-15.4	-15.4
N_{oc}	Config 1	dBm/15 KHz	-104.7dBm				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.3
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband.

7.5.1.5 NR SA FR2 Radio Link Monitoring Out-of-sync Test for PCell configured with CSI-RS-based RLM RS in non-DRX mode

Editor's Note: This test case is incomplete due to the following:

- Test Tolerances are available for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The Test Tolerances are incomplete for UE power classes other than PC3

- The Test Tolerances are incomplete for test frequencies > 40.8 GHz

7.5.1.5.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1.

7.5.1.5.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting 5GS NR SA FR2 and CSI-RS based RLM.

7.5.1.5.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.5.1.0.3. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.1.5.

7.5.1.5.4 Test description

There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 7.5.1.5.4-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync states.

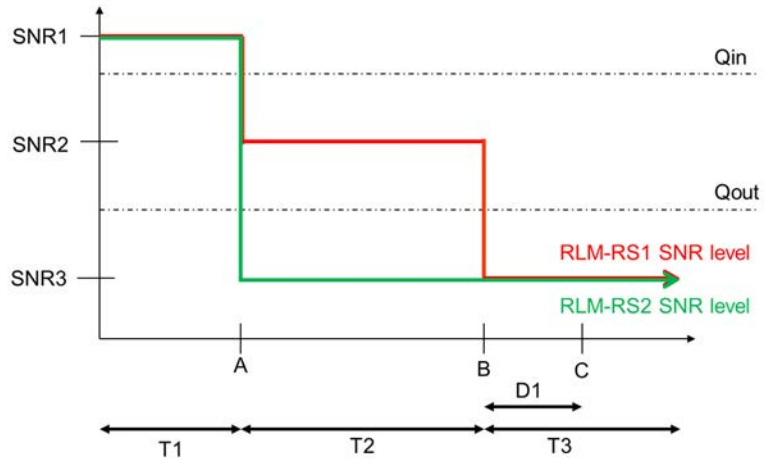

Figure 7.5.1.5.4-1: SNR variation for NR SA FR2 Radio Link Monitoring Out-of-sync Test for PCell configured with CSI-RS-based RLM RS in non-DRX mode

7.5.1.5.4.1 Initial conditions

This test shall be tested using the test configuration in Table 7.5.1.5.4.1-1.

Table 7.5.1.5.4.1-1: Supported test configurations for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Configuration	Description
7.5.1.5-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 7.5.1.5.4.1-2.

Table 7.5.1.5.4.1-2: Initial conditions for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.1.5.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell are given in Table 7.5.1.5.4.1-3
2. Message contents are defined in clause 7.5.1.5.4.3.
3. There is one carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.1.5.4.1-3: General test parameters for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1		24
$BW_{occupied}$	Config 1		24
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.4
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4

	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD Note 2
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.35
T3		s	0.35
D1		s	0.31
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: CSI-RS.3.1 TDD uses 2 antenna ports, which implies the SS shall transmit signal on both polarizations.			

Table 7.5.1.5.4.1-4: Measurement gap configuration for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: RLM RS is partially overlapped with measurement gap	

7.5.1.5.4.2 Test Procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 and SSB1 are configured as BFD-RS.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall transmit an *RRCReconfiguration* message configuring the UE for inter-frequency measurements.

3. The UE shall transmit *RRCReconfigurationComplete* message.

4. Set the parameters according to T1 in Table 7.5.1.5.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.1.5.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.1.5.5-1. T3 starts.

7. If the SS:

   a) detects uplink power in each slot configured for CQI transmission (according to configured CQI reporting periodicity on PUCCH) during the period from time point A to time point B

and

   b) does not detect any uplink power from time point C (D1 after the start of T3) until T3 expires,

the number of successful tests is increased by one.

Otherwise, the number of failed tests is increased by one and proceed to Step 10.

8. When T3 expires the SS shall change the SNR value to T1 as specified in Table 7.5.1.5.5-1.

9. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.1.5.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.1.5.4.3-1: Common Exception messages for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM RS in non-DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of Adjacent range) Table H.3.1-4 with A3-offset = -6dB Table H.3.1-6 with Condition RLM Table H.3.1-7 with Condition INTER-FREQ Table H.3.5-4 Table H.3.5-9 with Condition FR2 and CSI-RS RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.5.1.5.4.3-2: *UE-TimersAndConstants* for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM RS in non-DRX mode

Derivation Path: TS 38.508-1 [14], Table 4.6.3-200			
Information Element	**Value/remark**	**Comment**	**Condition**
UE-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

7.5.1.5.5 Test Requirement

Table 7.5.1.5.4.1-3 and 7.5.1.5.5-1 define the primary level settings including test tolerances for Radio Link Monitoring Out-of-sync Test for NR SA FR2 PCell configured with CSI-RS-based RLM RS in non-DRX mode.

Table 7.5.1.5.5-1: Cell specific test parameters for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Parameter	Unit	Test 1					
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.9.3					
		AoA1			AoA2		
Assumption for UE beams Note 10		Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS	dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB	0					
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						

EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR on RLM-RS1	Config 1	dB	4.1 Note 11	-3.9 Note 11	-15			
SNR on RLM-RS2	Config 1	dB	Not sent			4.1 Note 11	-15	-15
N_{oc}	Config 1	dBm/ 15kHz	-94.8			-94.8		
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.1.5.4.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is 38.133 [6] A.3.6.
Note 10: Information about types of UE beam is given in 38.133 [6] section B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 second after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.5.1.6 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Editor's Note: This test case is incomplete due to the following:

- Procedure to ensure signal balancing in 2AoA setups is still FFS

- Signal levels and propagation conditions need further evaluation

- Test Tolerances are available for the following configurations:

  - Test frequency f ≤ 40.8 GHz

  - UE PC3

  - The Test Tolerances are incomplete for UE power classes other than PC3

  - The Test Tolerances are incomplete for test frequencies > 40.8 GHz

7.5.1.6.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1.

7.5.1.6.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting 5GS NR SA FR2 and CSI-RS based RLM.

7.5.1.6.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.5.1.0.4. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.1.6.

7.5.1.6.4 Test description

There is one cell, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.1.6.4-1 shows the variation of the downlink SNR in the PCell to emulate the in-sync states.

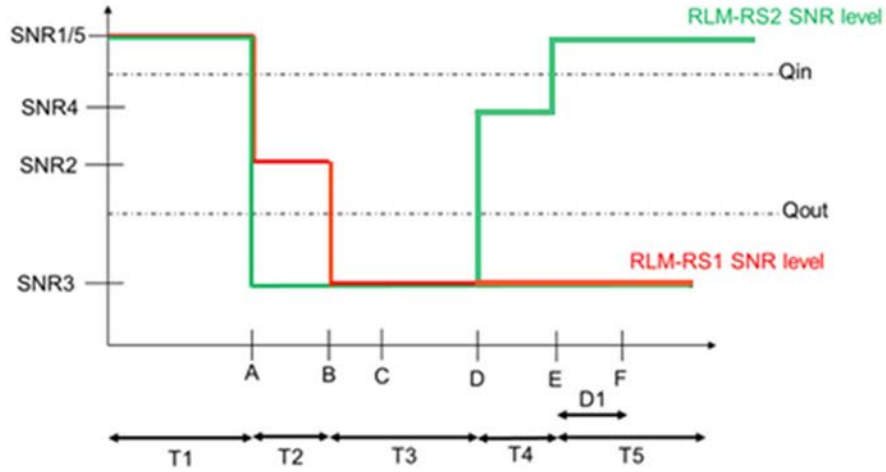

Figure 7.5.1.6.4-1: SNR variation for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

7.5.1.6.4.1 Initial conditions

This test shall be tested using the test configuration in Table 7.5.1.6.4.1-1.

Table 7.5.1.6.4.1-1: Supported test configurations for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Configuration	Description
7.5.1.6-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 7.5.1.6.4.1-2.

Table 7.5.1.6.4.1-2: Initial conditions for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.1.6.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell are given in Table 7.5.1.6.4.1-3

2. Message contents are defined in clause 7.5.1.6.4.3.

3. There is one carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.1.6.4.1-3: General test parameters for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1		24
$BW_{occupied}$	Config 1		24
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.4
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*

T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD Note 2
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: CSI-RS.3.1 TDD uses 2 antenna ports, which implies the SS shall transmit signal on both polarizations.			

7.5.1.6.4.2 Test Procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled and SSB0 and SSB1 are configured as BFD-RS.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.5.1.6.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.1.6.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.1.6.5-1. T3 starts.

5. When T3 expires, the SS shall change the SNR value to T4 as specified in Table 7.5.1.6.5-1. T4 starts.

6. When T4 expires, the SS shall change the SNR value to T5 as specified in Table 7.5.1.6.5-1. T5 starts.

7. If the SS detects uplink power in each slot configured for CQI transmission (according to configured CQI reporting periodicity on PUCCH) during the period from time point A to time point F (D1 after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise, the number of failed tests is increased by one.

8. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5

9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.1.6.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.1.6.4.3-1: Common Exception messages for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-7 Table H.3.5-4 Table H.3.5-9 with Condition FR2 and CSI-RS RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.5.1.6.4.3-3: *RLF-TimersAndConstant* for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms1000		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

7.5.1.6.5 Test Requirement

Table 7.5.1.6.4.1-3 and 7.5.1.6.5-1 define the primary level settings including test tolerances for Radio Link Monitoring In-sync Test for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode.

Table 7.5.1.6.5-1: Cell specific test parameters for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

Parameter		**Unit**	**Test 1**									
			T1	**T2**	**T3**	**T4**	**T5**	**T1**	**T2**	**T3**	**T4**	**T5**
AoA setup			Setup 3 defined in A.9.3									
			AoA1					**AoA2**				
Assumption for UE beams Note 10			Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	4					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS		dB										
EPRE ratio of PBCH DMRS to SSS		dB	0									
EPRE ratio of PBCH to PBCH DMRS		dB										
EPRE ratio of PSS to SSS		dB										
EPRE ratio of PDSCH DMRS to SSS		dB										
EPRE ratio of PDSCH to PDSCH DMRS		dB										
EPRE ratio of OCNG DMRS to SSS		dB										
EPRE ratio of OCNG to OCNG DMRS		dB										
SNR on RLM-RS1	Config 1	dB	4.1 Note 11	-3.9 Note 11	-15	-15	-15					
SNR on RLM-RS2	Config 1	dB	Not sent					4.1 Note 11	-15	-15	-4.5 Note 11	4.1 Note 11
N_{oc}	Config 1	dBm/ 15KHz	-94.8					-94.8				
Propagation condition			TDL-A 30ns 75Hz					TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting is assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 7.5.1.6.4.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is 38.133 [6] clause A.3.6.
Note 10:	Information about types of UE beam is given in 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.5.1.7 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM RS in DRX mode

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.5.1.7.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in TS 38.133 [6] clause 8.1.

7.5.1.7.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting 5GS NR SA FR2, CSI-RS based RLM and long DRX cycle.

7.5.1.7.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.5.1.0.3. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.1.7.

7.5.1.7.4 Test description

There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 7.5.1.7.4-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync states.

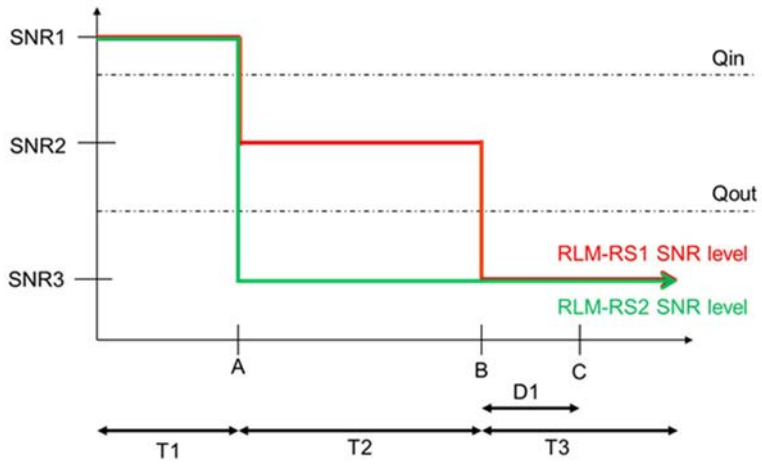

Figure 7.5.1.7.4-1: SNR variation for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM RS in DRX mode

7.5.1.7.4.1 Initial conditions

This test shall be tested using the test configuration in Table 7.5.1.7.4.1-1.

Table 7.5.1.7.4.1-1: Supported test configurations for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

Configuration	Description
7.5.1.7-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 7.5.1.7.4.1-2.

Table 7.5.1.7.4.1-2: Initial conditions for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM RS in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.1.7.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell are given in Table 7.5.1.7.4.1-3
2. Message contents are defined in clause 7.5.1.7.4.3.
3. There is one carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.1.7.4.1-3: General test parameters for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM RS in DRX mode

Parameter	Unit	Value
		Test 1
Active PCell		Cell 1

RF Channel Number			1
Duplex mode	Config 1		TDD
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

7.5.1.7.4.2 Test Procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 and SSB1 are configured as BFD-RS.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.5.1.7.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.1.7.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.1.7.5-1. T3 starts.

5. If the SS:

   a) detects uplink power in the On duration part of every DRX cycle in the slots configured for CQI transmission (according to configured CQI reporting periodicity on PUCCH) during the period from time point A to time point B

   and

   b) does not detect any uplink power from time point C (D1 after the start of T3) until T3 expires,

   the number of successful tests is increased by one.

   Otherwise, the number of failed tests is increased by one and proceed to Step 10.

6. When T3 expires the SS shall change the SNR value to T1 as specified in Table 7.5.1.7.5-1.

7. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5

8. If the Reconfiguration fails, switch off and on the UE and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.1.7.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.1.7.4.3-1: Common Exception messages for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM RS in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-7 Table H.3.5-4 Table H.3.5-9 with Condition FR2 and CSI-RS RLM Table H.3.7-1 with condition DRX.3 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.5.1.3.4.3-2: *UE-TimersAndConstants* for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM RS in DRX mode

Derivation Path: TS 38.508-1 [14], Table 4.6.3-200			
Information Element	**Value/remark**	**Comment**	**Condition**
UE-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

7.5.1.7.5 Test Requirement

Table 7.5.1.7.4.1-3 and 7.5.1.7.5-1 define the primary level settings including test tolerances for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM RS in DRX mode.

Table 7.5.1.7.5-1: Cell specific test parameters for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup		dB	Setup 1 defined in A.9.1		
Assumption for UE beams Note 10			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB			
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS1	Config 1	dB	3.3 Note 11	-4.7 Note 11	-15.4
SNR on RLM-RS2	Config 1	dB	3.3 Note 11	-15.4	-15.4
N_{oc}	Config 1	dBm/15KHz	-104.7		
Propagation condition			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.1.7.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is clause 38.133 [6] clause A.3.6.
Note 10: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 seconds after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.5.1.8 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.5.1.8.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1.

7.5.1.8.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting 5GS NR SA FR2, CSI-RS based RLM and long DRX cycle.

7.5.1.8.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.5.1.0.4. DRX configuration is used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.1.8.

7.5.1.8.4 Test description

There is one cell, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.1.8.4-1 shows the variation of the downlink SNR in the PCell to emulate the in-sync states.

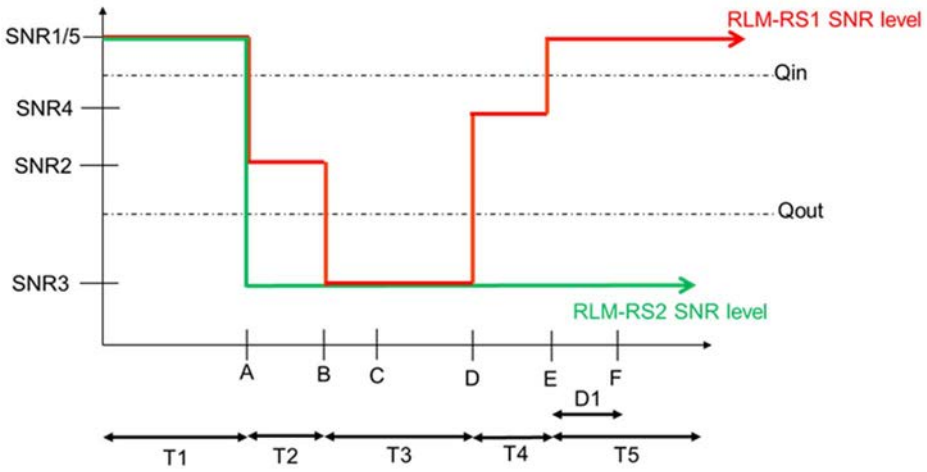

Figure 7.5.1.8.4-1: SNR variation for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

7.5.1.8.4.1 Initial conditions

This test shall be tested using the test configuration in Table 7.5.1.8.4.1-1.

Table 7.5.1.8.4.1-1: Supported test configurations for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

Configuration	Description
7.5.1.8-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 7.5.1.8.4.1-2.

Table 7.5.1.8.4.1-2: Initial conditions for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.1.8.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell are given in Table 7.5.1.8.4.1-3
2. Message contents are defined in clause 7.5.1.8.4.3.
3. There is one carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.1.8.4.1-3: General test parameters for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1

CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*2000*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	1.64
T4		s	0.2
T5		s	1.88
D1		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table 7.5.1.8.4.1-4: Measurement gap configuration for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: RLM RS is partially overlapped with measurement gap	

7.5.1.8.4.2 Test Procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled and SSB0 and SSB1 are configured as BFD-RS.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall transmit an *RRCReconfiguration* message configuring the UE for inter-frequency measurements.

3. The UE shall transmit *RRCReconfigurationComplete* message.

4. Set the parameters according to T1 in Table 7.5.1.6.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.1.6.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.1.6.5-1. T3 starts.

7. When T3 expires, the SS shall change the SNR value to T4 as specified in Table 7.5.1.6.5-1. T4 starts.

8. When T4 expires, the SS shall change the SNR value to T5 as specified in Table 7.5.1.6.5-1. T5 starts.

9. If the SS detects uplink power in the On duration part of every DRX cycle in the slots configured for CQI transmission (according to configured CQI reporting periodicity on PUCCH) during the period from time point A to time point F (D1 after the start of time duration T5) the number of successful tests is increased by one.

   Otherwise, the number of failed tests is increased by one.

10. If the UE has not re-established the connection in at least 1s, the UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.1.8.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.1.8.4.3-1: Common Exception messages for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of Adjacent range) Table H.3.1-4 with A3-offset = -6dB Table H.3.1-6 with Condition RLM Table H.3.1-7 Table H.3.5-4 Table H.3.5-9 with Condition FR2 and CSI-RS RLM Table H.3.7-1 with condition DRX.3 and Gap Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.3

Table 7.5.1.8.4.3-3: *RLF-TimersAndConstant* for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms2000		
n310	n1		
n311	n1		
t311-v1530	ms1000		
}			

7.5.1.8.5 Test Requirement

Table 7.5.1.8.4.1-3 and 7.5.1.8.5-1 define the primary level settings including test tolerances for Radio Link Monitoring In-sync Test for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode.

Table 7.5.1.8.5-1: Cell specific test parameters for NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup		dB	Setup 1 defined in A.9.1				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	4				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS							
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS1	Config 1	dB	3.3 Note 11	-4.7 Note 11	-15.4	-4.9 Note 11	3.3 Note 11
SNR on RLM-RS2	Config 1	dB	3.3 Note 11	-15.4	-15.4	-15.4	-15.4
N_{oc}	Config 1	dBm/15KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting is assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 7.5.1.8.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is TS 38.133 [6] clause A.3.6.
Note 10: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

7.5.1.9 NR SA FR2 radio link monitoring UE scheduling restrictions

Editor's note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

The test is incomplete for UE power classes other than PC3

The test is incomplete for test frequencies > 40.8 GHz

7.5.1.9.1 Test purpose

The purpose of this test is to verify that the NR UE correctly follows the RLM scheduling restrictions requirements defined in TS 38.133 [6] clause 8.1.7, and to verify that the UE correctly receive the PDCCH scheduled on the symbols right before the RLM SSB symbols without overlap so that it sends ACK/NACK correctly.

7.5.1.9.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

This test is only applicable to UE which supports *pdcch-MonitoringAnyOccasions* or *pdcch-MonitoringAnyOccasionsWithSpanGap*.

7.5.1.9.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 7.5.1.0.5.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.1.9.

7.5.1.9.4 Test description

There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of one time period with time duration of T1. Figure 5.5.1.9.4-1 shows the Time multiplexed downlink transmissions from each Angle of Arrival. The UE is required during time period T1 to transmit ACK/NACK correctly upon scheduling of PDSCH.

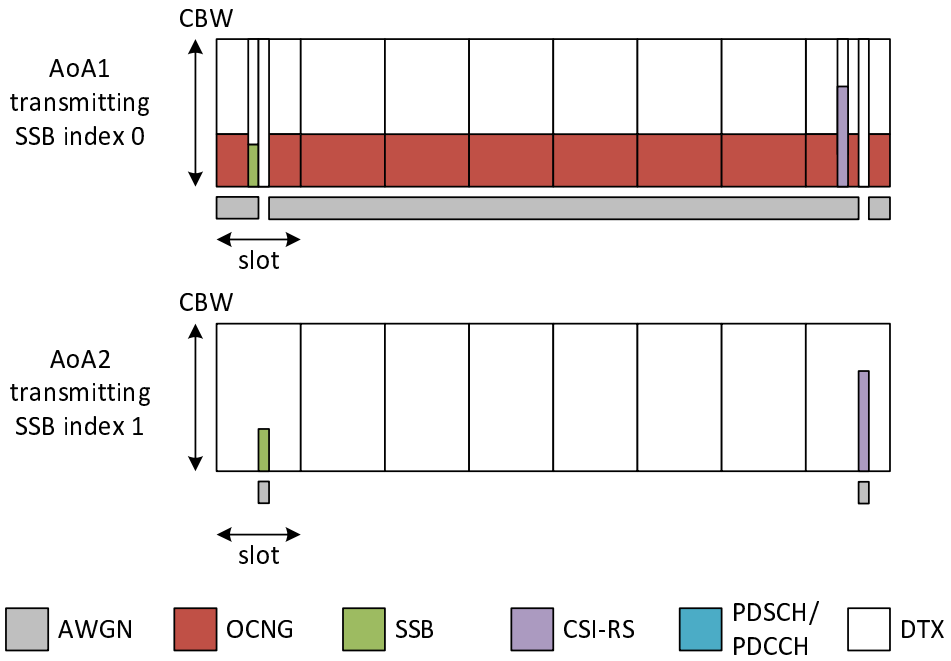

Figure 7.5.1.9.4-1: Time multiplexed downlink transmissions

7.5.1.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.1.9.4.1-1.

Table 7.5.1.9.4.1-1: Supported test configurations for NR SA FR2 radio link monitoring UE scheduling restrictions

Configuration	Description
7.5.1.9-1	120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.1.9.4.1-2

Table 7.5.1.9.4.1-2: Initial conditions for NR SA FR2 radio link monitoring UE scheduling restrictions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.1.9.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell are given in Table 7.5.1.9.4.1-3

2. Message contents are defined in clause 7.5.1.9.4.3.

3. There is one carrier and one cell specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.1.9.4.1-3: General test parameters for NR SA FR2 radio link monitoring UE scheduling restrictions

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		1	1	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.3	
DRX cycle length	s	1	OFF	
T1	s	1	5	During T1 the UE is required to correctly transmit ACK/NACK

7.5.1.9.4.2 Test Procedure

There is one cell (Cell 1), which is the active NR cell, in the test. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. During the test PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending.

1. Set the parameters according to T1 in Table 7.5.1.9.4.4-1. Propagation conditions are set according to Annex C.2.2. T1 starts.

2. The SS continuously schedules DL reception on the symbols #2-3 right before each SSB which is not covered by SMTC.

2. If the SS observes no ACK/NACK DTX on each UL transmission occasion scheduled during step 2 via PDCCH which are not overlapped with SSBs configured for radio link monitoring during T1, the number of successful tests is increased by one. otherwise the number of failed tests is increased by one.

3. The UE is switched off and then on. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [10] clause 4.5.

4. Repeat steps 1-3 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.1.9.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.1.9.4.3-1: Common Exception messages for NR SA FR2 radio link monitoring UE scheduling restrictions

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition INTRA-FREQ MO, Synchronous cells and set smtc1 as SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.3 Table H.3.1-8 with condition SSB RLM

Table 7.5.1.9.4.3-2: *SearchSpace*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162 with condition USS			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
monitoringSymbolsWithinSlot	00100000000000	Ensure that the UE monitors PDCCH on symbols right before SSB#0 (symbol #2 and #3)	
}			

7.5.1.9.5 Test Requirement

Table 7.5.1.9.4.1-3 and 7.5.1.9.5-1 define the primary level settings including test tolerances for NR SA FR2 radio link monitoring UE scheduling restrictions.

Table 7.5.1.9.5-1: Cell specific test parameters for NR SA FR2 radio link monitoring UE scheduling restrictions

Parameter	Unit	Test configuration	Cell 1	
AoA setup		1	Setup 3 defined in A.9.3	
			AoA1	AoA2
Assumption for UE beams Note 1			Rough	Rough
TDD configuration		1	TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24	
PDSCH Reference measurement channel		1	SR.3.2 TDD	Not sent
RMSI CORESET RMC configuration		1	CR.3.1 TDD	Not sent
Dedicated CORESET RMC configuration		1	CCR.3.2 TDD	Not sent
TRS configuration		1	TRS.2.1 TDD	TRS.2.2 TDD
PDCCH/PDSCH TCI state		1	TCI.State.2	N/A
OCNG Pattern		1	OP.5	Not sent
Initial DL BWP configuration		1	DLBWP.0.1	
Initial UL BWP configuration		1	ULBWP.0.1	
RLM-RS		1	SSB with index 0	SSB with index 1
N_{oc}	dBm/15kHz	1	-94.8	-94.8

N_{oc} Note2	dBm/SCS	1	-85.8	-85.8
$\hat{E}_s / N_{oc}$	dB	1	4.1	4.1
$\hat{E}_s / I_{ot}$ BB Note 4	dB	1	2.37	2.37
SSB_RP Note3	dBm/SCS	1	-81.7	-81.7
Io	dBm/95.04 MHz	1	-55.65	-55.65
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure 7.5.1.9.4-1	
Propagation Condition		1	AWGN	AWGN

Note 1: Information about types of UE beam is given in TS 38.133 [6] B.2.1.3 and does not limit UE implementation or test system implementation.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.

The UE behaviour during time duration T1 follows the requirements defined in TS 38.133 [6] clause 8.1.7.3:

The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.

The UE shall be continuously scheduled by PDCCH on the symbols right before each SSB which is not covered by SMTC during the entire length of T1. The UE shall transmit ACK/NACK for every scheduled PDCCH during the time duration T1.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

7.5.1.10 NR SA FR2 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Editor's Note: This test case is incomplete in following aspects:

- MU and TT are missing
- Message contents may need to be updated
- Test procedure needs to be updated
- Applicability needs to be updated
- Annex E and F need to be updated
- Configuration of 3AoA setup and testability of the device is still FFS
- UE positioning procedure is still FFS

7.5.1.10.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements defined in clause 7.5.1.

7.5.1.10.2 Test applicability

This test applies to all types of NR UE release 18 and forward, supporting [fast beam sweeping in multi-Rx].

7.5.1.10.3 Minimum conformance requirement

The minimum requirements are specified in clause 7.5.1.0.1. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.1.10.

7.5.1.10.4 Test description

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 7.5.1.10.4.1-1. The test parameters are given in Tables 7.5.1.10.5-1, and 7.5.1.10.5-2.

There is one cell (Cell 2), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 7.5.1.10.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure 7.5.1.10.4-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and configured with *groupBasedBeamReporting-r17*. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms, in addition to RLM-RS radio link monitoring using SSB index 0 and SSB index 1.

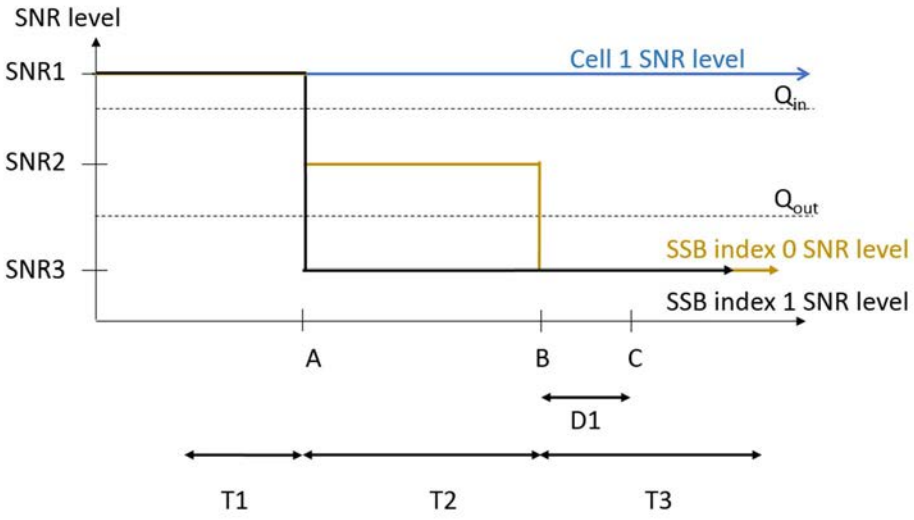

Figure 7.5.1.10.4-1: SNR variation for out-of-sync testing

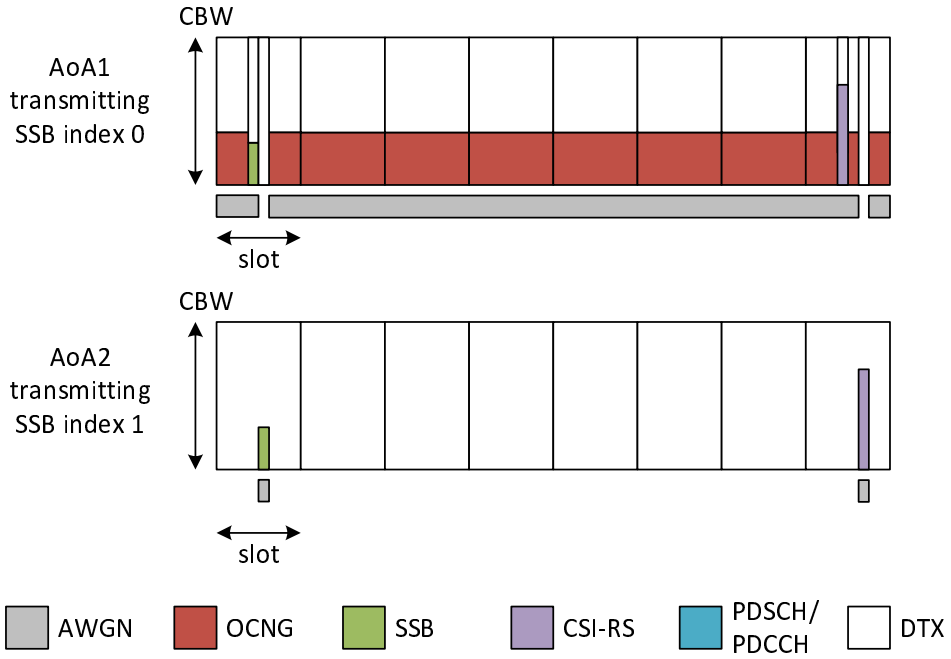

Figure 7.5.1.10.4-2: Time multiplexed downlink transmissions

7.5.1.10.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

The initial test configurations consist of environmental conditions, test frequencies, test channel bandwidths and sub-carrier spacing based on NR operating bands specified in Table 5.3.5-1 of 38.521-2 [18].

This test shall be tested using any of the test configurations in Table 7.5.1.10.4.1-1.

Table 7.5.1.10.4.1-1: Supported Test Configurations for NR SA FR2 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Configuration	Description
7.5.1.10-1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Configure the test equipment and the DUT according to the parameters in Table 7.5.1.10.4.1-2

Table 7.5.1.10.4.1-2: Initial conditions for NR SA FR2 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.1, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.1.10.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.5.1.10.4.3.

2. The power levels and settings for Cell 1 are set according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2

3. The test parameters are given in Tables 7.5.1.10.4.1-3, 7.5.1.10.5-1 and 7.5.1.10.5-2 below.

Table 7.5.1.10.4.1-4: General test parameters for NR SA FR2 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1		100: $N_{PRB,c}$ = 66
Data PRBs allocated		Config 1		24
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.4 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		PRACH.1 FR2
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.5
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				*NA*
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1		TRS.2.1 TDD
T1			s	0.2
T2			s	1.2*N +0.08 Note 3
T3			s	1.2*N +0.08 Note 3
D1			s	1.2*N +0.04 Note 3

NOTE 1: All configurations are assigned to the UE prior to the start of time period T1.
NOTE 2: UE-specific PDCCH is not transmitted after T1 starts.
NOTE 3: N is the value indicated by UE for *fastBeamSweepingMultiRx-r18*.

7.5.1.10.4.2 Test Procedure

Before the start of T1, the UE shall be fully synchronized with Cell 1. The UE shall be configured for periodic CQI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 7.5.1.10.4.1-4.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR*, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [6] clause 5.5.

2. The SS shall transmit an *RRCReconfiguration* message configuring the UE with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, *purpose* set to '*rlf*', and *groupBasedBeamReporting-r17*, as specified in section 7.5.1.10.4.3.

3. The UE shall transmit *RRCReconfigurationComplete* message.

4. Set the parameters according to T1 in Table 7.5.1.10.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.1.10.5-1. T2 starts.

6.When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.1.10.5-1. T3 starts.

7. If the SS:
   a) detects uplink power in each subframe configured for CQI transmission (according to configured CQI periodicity on PUCCH format 2) during the period from time point A to time point B

   and

   b) does not detect any uplink power from time point C (D1 seconds after the start of T3) until T3 expires,

   the number of successful tests is increased by one.

8. Otherwise, the number of failed tests is increased by one and proceed with Step 10.

9. When T3 expires the SS shall change the SNR value to T1 as specified in Table 7.5.1.10.5-1.

10. If the UE has not re-established the connection in at least 1s, the SS shall ensure PCell is released, the UE shall be switched off and then on.

11. Repeat steps 1-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.1.10.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.1.10.4.3-1: Common Exception messages for NR SA FR2 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of Adjacent range) Table H.3.1-4 with A3-offset = -6dB Table H.3.1-6 with Condition RLM Table H.3.1-7 with Condition INTER-FREQ Table H.3.1-8 with Condition SSB RLM Table H.3.5-4 Table H.3.5-9 with Condition FR2 SSB RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.5.1.10.4.3-2: RLF-TimersAndConstants for NR SA FR2 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
UE-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

7.5.1.10.4 Test Requirement

Tables 7.5.1.10.5-1 and 7.5.1.10.5-2 define the cell specific primary level settings for NR SA FR2 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx.

Table 7.5.1.10.5-1: OTA related cell specific test parameters for NR SA FR2 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Parameter		**Unit**	**Test 1**					
			T1	**T2**	**T3**	**T1**	**T2**	**T3**
AoA setup			Setup 5 defined in A.9					
			AoA1			AoA2		
Assumption for UE beams Note 5			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1	dB	2+TT Note 6	-6+TT Note 6	-15+TT			
ssb-Index 1 SNR	Config 1		Not sent			2+TT Note 6	-15+TT	-15+TT
N_{oc}	Config 1	dBm/ 15kHz	-92.1+TT			-92.1+TT		
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure 7.5.1.10.4-2					
Propagation condition			TDL-A 30 ns 75 Hz			TDL-A 30 ns 75 Hz		

NOTE 1: OCNG shall be used such a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
NOTE 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is D.4.1.1.
NOTE 5: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
NOTE 6: This value allows up to 1 dB degradation from applied SNR to UE baseband

Table 7.5.1.10.5-2: Measurement gap configuration for NR SA FR2 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE supporting fast beam sweeping in multi-Rx

Field	**Test 1**
	Value
gapOffset	0

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90 %.

7.5.2 Interruption

7.5.2.0 Minimum conformance requirements

7.5.2.0.1 Minimum conformance requirements for interruptions during measurements on deactivated NR SCC

[TS38.133, clause 8.2.2.2.3]

Interruptions on PCell due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 7.5.2.0.1-1 if the PCell is not in the same band as the deactivated SCell. Each interruption shall not exceed requirement in Table 7.5.2.0.1-2 if the PCell is in the same band as the deactivated SCell.

Interruptions on active SCell due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 7.5.2.0.1-1 if the active SCell is not in the same band as the deactivated SCell. Each interruption shall not exceed requirement in Table 7.5.2.0.1-2 if the active SCell is in the same band as the deactivated SCell.

[TS38.133, clause 8.2.2.2.2]

Table 7.5.2.0.1-1: Interruption duration for SCell activation/deactivation for inter-band CA

μ	NR Slot length (ms) of victim cell	Interruption length X2 (slots)	
0	1		1
1	0.5		1
2	0.25	Both aggressor cell and victim cell are on FR2	2
		Either aggressor cell or victim cell is on FR1	3
3	0.125	Aggressor cell is on FR2	4
		Aggressor cell is on FR1	5
5	0.03125	Aggressor cell is on FR1	17
6	0.015625	Aggressor cell is on FR1	33

Table 7.5.2.0.1-2: Interruption duration for SCell activation/deactivation for intra-band CA

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
1	0.5	1 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
2	0.25	2 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
3	0.125	4 + $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
5	0.03125	16+ $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
6	0.015625	32+ $T_{SMTC_duration} * N_{slot}^{subframe,\mu}$
NOTE 1: $T_{SMTC_duration}$ measured in subframes is - the longest SMTC duration among all above active serving cells and the SCell being activated when one SCell is activated. If SSB configuration		

	(*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being activated, the SSB transmission periodicity is assumed to be 5ms and $T_{SMTC\ duration}$ for the SCell being activated is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being activated. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being activated, $T_{SMTC\ duration}$ for the SCell being activated is 0ms; - the longest SMTC duration among all active servingNOTE 2: $N_{slot}^{subframe,\mu}$ is as defined in TS 38.211 [6].

The normative reference for this requirement is TS 38.133 [6] clause 8.2.1.2.5.1.

7.5.2.0.2 Minimum conformance requirements for SA interruptions at NR SRS carrier-based switching

[TS 38.133, Clause 8.2.2.2.9]

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to another activated carrier;
- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;
- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex and srs-SwitchFromCarrier in TS 38.331 [13];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [9].
- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD.
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [13], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101-1 [2] for frequency range 1 and TS 38.101-2 [3] for frequency range 2, the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 7.5.2.0.2-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 7.5.2.0.2-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 7.5.2.0.2-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 7.5.2.0.2-2.

Table 7.5.2.0.2-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us)[Note 1]	Interruption length X1 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	2	2
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
5	0.03125	≤ 200	22	15
		300, 500	31	24
		900	44	37
6	0.015625	≤ 200	42	28
		300, 500	61	47
		900	87	73
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.				

Table 7.5.2.0.2-2: Interruption length X2 (slot)

μ	length (ms) of victim cell	switching time (us) [Note 1]	Sub carrier spacing for aggressor cell (kHz)			
			60	120	480	960
0	1	≤ 200	2	2	2	2
1	0.5	≤ 200	2	2	2	2
2	0.25	≤ 200	3	3	2	2
3	0.125	≤ 200	4	4	3	3
5	0.03125	≤ 200	11	10	8	8
6	0.015625	≤ 200	21	18	15	15
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter *SRS-SwitchingTimeNR*.						

For intra-band SRS carrier switching in FR1 or FR2, interruptions in Table 7.5.2.0.2-1 and in Table 7.5.2.0.2-2 based on SRS carrier switching time ≤ 200us shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 7.5.2.0.2-1 and in Table 7.5.2.0.2-2 shall apply.

7.5.2.1 NR SA FR2 interruptions during measurements on deactivated NR SCC

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.5.2.1.1 Test purpose

The purpose of this test is to verify that the UE missed ACK/NACK rate does not exceed the limits at NR PCell interruptions during the measurement on the deactivated NR SCC. This test will verify the missed ACK/NACK rate for PCell in standalone NR specified in clause 7.5.2.0. Supported test configurations are shown in table 7.5.2.1.4.1-1.

7.5.2.1.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting SA FR2 and 2DL CA.

7.5.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.2.1.

7.5.2.1.4 Test description

7.5.2.1.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.5.2.1.4.1-1.

Table 7.5.2.1.4.1-1: Supported test configurations for NR SA FR2 interruptions during measurements on deactivated NR SCC

Configuration	Description
7.5.2.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD – TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.2.1.4.1-2.

Table 7.5.2.1.4.1-2: Initial conditions for NR SA FR2 interruptions during measurements on deactivated NR SCC

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.4.3.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.2.1.4.1-3.
2. Message contents are defined in clause 7.5.2.1.4.3.
3. There are two NR cells specified in the test. Cell 1 is the PCell on one NR carrier and Cell 2 is the SCell on the other NR carrier. Cell 1 and Cell 2 shall be initially configured according to annex C.

Table 7.5.2.1.4.1-3: General test parameters for NR SA FR2 interruptions during measurements on deactivated NR SCC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR RF channels
Active PCell		Cell1	PCell on NR RF channel number 1.
Configured deactivated SCell		Cell2	Deactivated SCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell2
DRX		OFF	
Measurement gap pattern Id		OFF	

SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

7.5.2.1.4.2 Test procedure

The test consists of two cells: Cell1 and Cell2. Cell1 is NR PCell and Cell2 is the deactivated NR SCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE shall be connected and fully synchronized to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector, defines the start of time period T1. During T1 the UE shall be continuously scheduled on the NR PCell DL.

Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Message contents are defined in clause 7.5.2.1.4.3.
2. Set the parameters according to values in Table 7.5.2.1.4.1-3 as appropriate. Propagation conditions are set according to clause C.2.2.
3. The SS shall transmit an *RRCReconfiguration* message including *measCycleSCell* for the deactivated NR SCell.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. Set the parameters according to T1 in Table 7.5.2.1.5-1 and Table 7.5.2.1.5-2. Propagation conditions are set according to clause C.2.2.
6. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. T1 starts. During T1, the SS shall monitor ACK/NACK/DTX on PCell.
7. If more than 99.5% of uplink transmissions are received by SS then count a success for the event “ACK/NACK”. Otherwise count a fail for the event “ACK/NACK”.
8. If no longer than X consecutive DTXs are observed by the SS, then count a success for the event “DTX”. Otherwise count a fail for the event “DTX”, where,
   - X = 6 if the NR PSCell is not in the same band as the deactivated SCell, otherwise X = 16.
9. After T1 expires, the SS shall transmit an RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources. After the RRC connection release, the SS shall:

   9a. transmit in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE, and go back to step 1 to prepare for the next iteration. If the paging fails, proceed as per step 9b.

   or

   9b. switch off and on the UE and go back to step 1 to prepare for the next iteration.

10. Repeat steps 1-9 until a test verdict has been achieved.

Each of the events "ACK/NACK" and "DTX" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

7.5.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.5.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Specific message contents exceptions for Test Configuration 7.5.2.1-1	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.1 FR2
Default RRC messages and information elements contents exceptions	Table H.3.1-1; Table H.3.1-2 with Condition Deactivated SCell; Table H.3.1-3 with Condition Deactivated SCell, SSB.1 FR2 and SMTC.1; Table H.3.1-4 with A3-offset = -6dB; Table H.3.1-7 with Condition Deactivated SCell;

7.5.2.1.5 Test requirement

Table 7.5.2.1.5-1 and Table 7.5.2.1.5-2 define the primary level settings including test tolerances for FR2 interruptions during measurements on deactivated NR SCC.

Table 7.5.2.1.5-1: NR cell specific test parameters for NR SA FR2 interruptions during measurements on deactivated NR SCC

Parameter		Unit	Cell1	Cell2
Frequency Range			FR2	
Duplex mode			TDD	
TDD configuration			TDDConf.3.1	
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66	
Data RBs allocated			66	
Initial DL BWP Configuration			DLBWP.0.2 Note4	
Initial UL BWP Configuration			ULBWP.0.2 Note6	
Downlink dedicated BWP Configuration			DLBWP.1.1	
Uplink dedicated BWP configuration			ULBWP.1.1	
PDSCH Reference measurement channel			SR.3.1 TDD	
RMSI CORESET parameters			CR.3.1 TDD	
Dedicated CORESET parameters			CCR.3.1 TDD	
OCNG Patterns			OP.1	
SMTC Configuration			SMTC.1	
SSB Configuration			SSB.1 FR2	
TCI State			TCI.State.0	
TRS Configuration			TRS.2.1 TDD	
Correlation Matrix and Antenna Configuration			1x2 Low	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Time offset to Cell1 Note 3		µs	-	3
Propagation Condition			AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in clause 12 of TS 38.213 [3].

Table 7.5.2.1.5-2: NR cell specific OTA related test parameters for NR SA FR2 interruptions during measurements on deactivated NR SCC

Parameter		Unit	Cell 1	Cell 2
Angle of arrival configuration			Setup1 according to table A.9	Setup 1according to table A.9
Assumption for UE beams Note 6			Rough	Rough
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-104.7	-104.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-95.7	-95.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
SSB_RPNote2	NR_TDD_FR2_A	dBm/120KHz Note3	-88.7	-88.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
$\hat{E}_s / N_{oc}$		dB	7	7
$\hat{E}_s / I_{ot}$		dB	7	7
IoNote2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-58.92	-58.92
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.

The UE shall be continuously scheduled on PCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on PCell.

If the NR PCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PCell immediately before and immediately after an SMTC. Each interruption on NR PCell shall not exceed the value defined in Table 7.5.2.1.5-3.

If the NR PCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PCell no earlier than 4 slots before an SMTC and no later than 4 slots after the SMTC. the interruption on NR PCell shall not exceed the value defined in Table 7.5.2.1.5-4.

Table 7.5.2.1.5-3: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	4

Table 7.5.2.1.5-4: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	8 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.2.2 SA interruptions at NR SRS carrier-based switching

Editor's Note: This test case is incomplete in following aspects:

- Test procedure is missing
- Message contents are missing
- TT analysis is missing

7.5.2.2.1 Test purpose

The purpose of this test is to verify that when a UE needs to transmit aperiodic SRS, the UE can perform SRS carrier-based switching to a carrier not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission. The test will partly verify the interruption requirements on PCell in clause 8.2.2.2.9 in TS 38.133 [6].

7.5.2.2.2 Test applicability

This test applies to all types of NR SA UE Rel-16 and forward with supporting of srs-CarrierSwitch.

7.5.2.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.2.2.

7.5.2.2.4 Test description

The test scenario comprises of two cells, Cell 1 and Cell 2. Cell 1 is the FR2 PCell. Cell 2 is an activated FR2 SCell on the TDD SCC which operates in downlink without PUCCH/PUSCH. The UE is configured with the SRS switching between PCell and SCell.

The test consists of two successive time periods, with duration of T1 and T2, respectively. Immediately at the beginning of T2, the UE is triggered for SRS switching by DCI 2_3 scheduling. After T2, the UE is expected to transmit aperiodic SRS on a special slot in the configured TDD UL/DL configuration, as scheduled by DCI 2_3. The UE shall be scheduled on PCell continuously throughout the test.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell.

7.5.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.2.2.4.1-1.

Table 7.5.2.2.4.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 7.5.2.2.4.1-2.

Table 7.5.2.2.4.1-2: Initial conditions for FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.2.2.4.1-3. Cell-specific parameters of NR PCell are specified in Table 7.5.2.2.5-1.
2. Message contents are defined in clause 7.5.2.2.4.3.
3. There are two NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 7.5.2.2.4.1-3: General test parameters for SA interruptions at NR SRS carrier-based switching

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1
Configured SCell		Cell 2	Activated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of PCell
T1	s	5	
T2	ms	100	UE shall perform SRS switching during T2

7.5.2.2.4.2 Test procedure

TBD

7.5.2.2.4.3 Message contents

TBD

7.5.2.2.5 Test requirement

Table 7.5.2.2.5-1 defines the NR cell specific test parameters. Table 7.5.2.2.5-2 defines OTA related test parameters, not including test tolerances yet [will update after TT analysis].

7.5.2.2.5-1: Cell-specific test parameters for SA interruptions at NR SRS carrier-based switching

Parameter		Unit	Cell 1	Cell 2
Frequency Range			FR2	
Duplex mode	Config 1		TDD	
TDD configuration	Config 1		TDDConf.3.1	
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66	

Downlink initial BWP Configuration	Config 1		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1		DLBWP.1.1
Uplink initial BWP configuration	Config 1		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1		ULBWP.1.1
SRS configuration	Config 1		SRS.6 TDD
TRS configuration	Config 1		TRS.2.1 TDD
TCI state	Config 1		TCI.State.0
PDSCH Reference measurement channel	Config 1		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
RMC CORESET Reference Channel	Config 1		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
$\hat{E}_s/N_{oc}$		dB	17
Propagation Condition			AWGN
NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 7.5.2.2.5-2: OTA related test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1 in TS 38.133 [6]	
Assumption for UE beams Note 6		Fine	
N_{oc} Note 1	dBm/15kHz Note 4	-112 + TT	
N_{oc} Note 1	dBm/SCS Note 3	-103 + TT	
$\hat{E}_s / N_{oc}$	dB	4 + TT	
SS-RSRP Note 2	dBm/SCS Note 4	-99 + TT	
$\hat{E}_s / I_{ot}$	dB	4 + TT	
Io Note2	dBm/95.04 MHz Note 4	-68.5 + TT	

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.
NOTE 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.
NOTE 6: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6] and does not limit UE implementation or test system implementation.

During T2, interruption on PCell due to SRS carrier-based switching between Cell 1 and Cell 2 shall not exceed the required values specified in clause 7.5.2.0.2.

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.3 SCell activation and deactivation delay

7.5.3.0 Minimum conformance requirements

7.5.3.0.1 Minimum conformance requirements for SCell activation delay for deactivated SCell

Upon receiving SCell activation command in slot *n*, the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot $n + \frac{T_{HARQ}+T_{activation_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where:

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [8]

$T_{activation_time}$ is the SCell activation delay in millisecond.

If the SCell is known and belongs to FR1, $T_{activation_time}$ is:

- $T_{FirstSSB}$+ 5ms, if the SCell measurement cycle is equal to or smaller than 160ms.
- $T_{FirstSSB_MAX}$ + T_{rs} + 5ms, if the SCell measurement cycle is larger than 160ms.

If the SCell is unknown and belongs to FR1, provided that the side condition Ês/Iot ≥ -2 dB is fulfilled, $T_{activation_time}$ is:

- $T_{FirstSSB_MAX}$ + T_{SMTC_MAX} + 2*T_{rs} + 5ms.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, then $T_{activation_time}$ is $T_{FirstSSB}$+ 5ms provided:

- The UE is provided with SMTC for the target SCell, and
- The SSBs in the serving cell(s) and the SSBs in the SCell fulfil the condition defined in TS 38.133 [6] clause 3.6.3,
- The parameter *ssb-PositionsInBurst* is same for the serving cell(s) and the SCell.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, if the UE is not provided with any SMTC for the target SCell, $T_{activation_time}$ is 3 ms, provided

- the RS (s) of SCell being activated is (are) QCL-TypeD with RS (s) of one active serving cell on that FR2 band.

If the SCell being activated belongs to FR2 and if there is no active serving cell on that FR2 band provided that PCell or PSCell is FR1 or in FR2:

If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:

- 3ms + max($T_{uncertainty_MAC}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$), where $T_{uncertainty_MAC}$=0 and $T_{uncertainty_SP}$=0 if UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation command at the same time.

If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:

- max ($T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC}$ + T_{RRC_delay}-T_{HARQ}), where $T_{uncertainty_MAC}$=0 if UE receives the SCell activation command and TCI state activation commands at the same time.

If the PCell/PSCell and the target SCell are in a band pair with independent beam management and the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition Ês/Iot ≥ -2dB is fulfilled, then $T_{activation_time}$ is:

- 6ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + T_{HARQ} + max($T_{uncertainty_MAC}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$).

If the PCell/PSCell and the target SCell are in a band pair with independent beam management and the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, then $T_{activation_time}$ is:

- 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}.

Where,

T_{SMTC_MAX}:

- In FR1, in case of intra-band SCell activation, T_{SMTC_MAX} is the longer SMTC periodicity between active serving cells and SCell being activated provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot; in case of inter-band SCell activation, T_{SMTC_MAX} is the SMTC periodicity of SCell being activated.

- In FR2, T_{SMTC_MAX} is the longer SMTC periodicity between active serving cells and SCell being activated provided that in Rel-15 only support FR2 intra-band CA.

- T_{SMTC_MAX} is bounded to a minimum value of 10ms.

T_{rs} is the SMTC periodicity of the SCell being activated if the UE has been provided with an SMTC configuration for the SCell in SCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement which involves T_{rs} is applied with T_{rs} = 5ms assuming the SSB transmission periodicity is 5ms. There are no requirements if the SSB transmission periodicity is not 5ms

$T_{FirstSSB}$: is the time to the end of the first completed SSB burst indicated by the SMTC after slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$

$T_{FirstSSB_MAX}$: Is the time to the end of the first completed SSB burst indicated by the SMTC after slot n + $\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, further fulfilling:

- In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCell being activated is transmitting SSB burst.

- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

$T_{FineTiming}$ is the time period between UE finish processing the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS (when applicable) and the timing of first complete available SSB corresponding to the TCI state.

$T_{L1\text{-}RSRP,\ measure}$ is L1-RSRP measurement delay $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ (ms) or $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ based on applicability as defined in TS 38.133 [6] clause 9.5 assuming M=1.

$T_{L1\text{-}RSRP,\ report}$ is delay of acquiring CSI reporting resources.

$T_{uncertainty_MAC}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable) relative to

- SCell activation command for known case;

- First valid L1-RSRP reporting for unknown case.

$T_{uncertainty_RRC}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) relative to

- SCell activation command for known case;

- First valid L1-RSRP reporting for unknown case.

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [13].

Longer dekays for RRM measurement requirements, and in case of FR2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

$T_{CSI_reporting}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13].

SCell in FR1 is known if it has been meeting the following conditions:

- During the period equal to max (5*measCycleSCell, 5*DRX cycles) for FR1 before the reception of the SCell activation command:
  - the UE has sent a valid measurement report for the SCell being activated and
  - the SSB measured remains detectable according to the cell identification conditions specified in TS 38.133 [6] clause 9.2 and 9.3.
- the SSB measured during the period equal to max (5*measCycleSCell, 5*DRX cycles) also remains detectable during the SCell activation delay according to the cell identification conditions specified in TS 38.133 [6] clause 9.2 and 9.3.

Otherwise SCell in FR1 is unknown.

For the first SCell activation in FR2 bands, the SCell is known if it has been meeting the following conditions:

- During the period equal to 4s for UE supporting power class1 and 3s for UE supporting power class 2/3/4 before UE receives the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable):
  - the UE has sent a valid L3-RSRP measurement report with SSB index
  - SCell activation command is received after L3-RSRP reporting and no later than the time when UE receives MAC-CE command for TCI activation
- During the period from L3-RSRP reporting to the valid CQI reporting, the reported SSBs with indexes remain detectable according to the cell identification conditions specified in TS 38.133 [6] clauses 9.2 and 9.3, and the TCI state is selected based on one of the latest reported SSB indexes.

Otherwise, the first SCell in FR2 band is unknown. The requirement for unknown SCell applies provided that the activation commands for PDCCH TCI, PDSCH TCI (when applicable), semi-persistent CSI-RS for CQI reporting (when applicable), and configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) are based on the latest valid L1-RSRP reporting.

If the UE has been provided with higher layer in TS 38.331 [13] signalling of *smtc2* prior to the activation command, T_{SMTC_Scell} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. T_{SMTC_MAX} follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.331 [13] for a SCell at the first opportunities for the corresponding actions once the SCell is activated.

The interruption on PSCell or any activated SCell in SCG for EN-DC mode specified in TS 38.133 [6] clause 8.2 shall not occur before slot $n+1+\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot $n+1+\frac{T_{HARQ}+3+T_{SMTC_MAX}+T_{SMTC_duration}}{NR\ slot\ length}$.

The interruption on PCell or any activated SCell in MCG for NR standalone mode specified in TS 38.133 [6] clause 8.2 shall not occur before slot $n+1+\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot $n+1+\frac{T_{HARQ}+3+T_{SMTC_MAX}+T_{SMTC_duration}}{NR\ slot\ length}$.

Starting from the slot specified in TS 38.213 [8] clause 4.3 (timing for secondary Cell activation/deactivation) and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in TS 38.213 [8] clause 4.3 (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.2.

7.5.3.0.2 Minimum conformance requirements for SCell deactivation delay for activated SCell

Upon receiving SCell deactivation command or upon expiry of the *sCellDeactivationTimer* in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

The interruption on PSCell or any activated SCell in SCG for EN-DC mode specified in TS 38.133 [6] clause 8.2 shall not occur before slot n+1+$[\frac{T_{HARQ}}{NR\ slot\ length}]$ and not occur after slot n+1+$\frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

The interruption on PCell or any activated SCell in MCG for NR standalone mode specified in TS 38.133 [6] clause 8.2 shall not occur before slot n+1+$[\frac{T_{HARQ}}{NR\ slot\ length}]$ and not occur after slot n+1+$\frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.3.

7.5.3.1 NR SA FR2-FR2 intra-band SCell activation and deactivation delay

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Test procedure
- Connection diagram
- Message contents are not complete.
- TT analysis is missing.
- Test Applicability in TS38.522
- Annex F
- Cell configuration mapping in Annex E

7.5.3.1.1 Test purpose

The purpose of this test is:

- To verify the requirement for the SCell activation and deactivation times are within the requirements specified in TS 38.133 [6] clause 8.3, when the PCell and SCell are is in FR2 intra-band and SCell is known by the UE at the time of activation.

7.5.3.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards and supporting 2DL CA.

7.5.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 7.5.3.0.1 and 7.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.3.1.

7.5.3.1.4 Test description

7.5.3.1.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.5.3.1.4.1-1.

Table 7.5.3.1.4.1-1: Supported test configurations for NR SA FR2 SCell activation case

Configuration	Description
7.5.3.1-1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.3.1.4.1-2.

Table 7.5.3.1.4.1-2: Initial conditions for NR SA FR2 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.3.1.4.1-3.
2. Message contents are defined in clause 7.5.3.1.4.3.
3. There are two NR carriers and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is SCell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.5.3.1.4.1-3: General test parameters for NR SA FR2 SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test, cell 1 and cell2 use RF channel 1 and 2, respectively.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.

T_{HARQ}	slot	k	k is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [8] depends on UE's capability
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13].

7.5.3.1.4.2 Test procedure

TBD

7.5.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.5.3.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	FFS

7.5.3.1.5 Test requirement

TBD

7.5.3.2 NR SA FR1-FR2 inter-band SCell activation and deactivation delay

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Test procedure
- Connection diagram
- Message contents are not complete.
- TT analysis is missing.
- Test Applicability in TS38.522
- Annex F
- Cell configuration mapping in Annex E
- NR FR1 - FR2 OTA testability is still FFS.

7.5.3.2.1 Test purpose

The purpose of this test is:

- To verify the requirement for the SCell activation and deactivation times are within the requirements specified in TS 38.133 [6] clause 8.3, when the PCell is in FR1 and SCell is in FR2 and SCell is known by the UE at the time of activation.

7.5.3.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards and supporting 2DL CA.

7.5.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 7.5.3.0.1 and 7.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.3.2.

7.5.3.2.4 Test description

7.5.3.2.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.5.3.2.4.1-1.

Table 7.5.3.2.4.1-1: Supported test configurations for NR SA FR2 SCell activation case

Configuration	Description
7.5.3.2-1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.5.3.2-2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.5.3.2-3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.5.3.2.4.1-2.

Table 7.5.3.2.4.1-2: Initial conditions for NR SA FR2 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.3.2.4.1-3.
2. Message contents are defined in clause 7.5.3.2.4.3.
3. There are two NR carriers and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is SCell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.5.3.2.4.1-3: General test parameters for NR SA FR2 SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.

T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	2	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	slot	k	k is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [8] depends on UE's capability
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13].

7.5.3.2.4.2 Test procedure

TBD

7.5.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.5.3.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	FFS

7.5.3.2.5 Test requirement

TBD

7.5.3.3 SCell Activation and deactivation for SCell in FR2 inter-band in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.5.3.3.1 Test purpose

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause specified in TS 38.133 [6] clause 8.3, when the PCell and SCell are in FR2 inter-band and SCell in FR2 is known by the UE at the time of activation.

7.5.3.3.2 Test applicability

This test applies to all types of NR UE release 17 onwards supporting 5GS NR SA FR2 and 2DL CA.

7.5.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 7.5.3.0.1 and 7.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.3.3.

7.5.3.3.4 Test description

7.5.3.3.4.1 Initial conditions

The supported test configurations are shown in table 7.5.3.3.4.1-1. The general test parameters are described in Tables 7.5.3.3.4.1-3, and cell specific test parameters are described in Tables 7.5.3.3.4.1-4. OTA related test parameters are shown in table 7.5.3.3.4.1-5.

Table 7.5.3.3.4.1-1: Supported test configurations for FR2 SCell activation in FR2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.3.3.4.1-2.

Table 7.5.3.3.4.1-2: Initial conditions for NR SA FR2 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.3.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.3	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.3.3.4.1-3.
2. Message contents are defined in clause 7.5.3.3.4.3.
3. There are two NR carriers and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is SCell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.5.3.3.4.1-3: General test parameters for FR2 SCell activation in FR2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	≤8	A random value from 0μs to 8μs

T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	2	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by dl-DataToUL-ACK, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

7.5.3.3.4.2 Test procedure

The test consists of three successive time periods, with duration T1, T2 and T3 respectively. Before the test starts the UE is connected to Cell 1 but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2. Immediately at beginning of T2 the transmission power of Cell 2 is increased to same level as for cell 2. During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot m+$T_{L1\text{-}RSRP}$. In the next DL slot after slot m+$T_{L1\text{-}RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Tables 7.5.3.3.4.1-3 and 7.5.3.3.4.1-4. Propagation conditions are set according to Annex C clauses C.2.2.
3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1 and provide measurement configurations.
4. The UE sends a *MeasurementReport* message.
5. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.
6. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n and T2 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 7, otherwise go to step 10.
7. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell according to the following criteria:

   - If the UE starts sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot (m+$T_{L1\text{-}RSRP}$), where $T_{L1\text{-}RSRP}$ is no larger than

   3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ as defined in TS 38.133 [6] clause 8.3.2.

   For this test case, $T_{FirstSSB_MAX}$=T_{SMTC_MAX}=T_{rs}=20ms; $T_{L1\text{-}RSRP,\ measure}$=480ms and $T_{L1\text{-}RSRP,\ report}$=5ms, which allows $T_{L1\text{-}RSRP}$ 1000 ms.

   - and CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where T_{HARQ} is defined in Table A.5.5.3.1.1-2

$T_{activation_time}$ = 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}, which allows 1030 ms

$T_{CSI_Reporting}$ = 10ms

NR slot length is 0.125ms for this test case.

- and the interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $m + 1 + \frac{T_{\mathrm{HARQ}+3\mathrm{ms}+T_X}}{\mathrm{NR\ slot\ length}}$, where T_X =20ms.

- Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 10.

8. When T2 expires, the SS deactivate SCC by sending the deactivation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m and T3 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 9, otherwise go to step 10.

9. The UE shall stop sending CSI reports for SCell no later than slot n + $\frac{\mathrm{T_{HARQ}+3ms}}{NR\ slot\ length}$, as defined in clause 8.3 and the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot n + 1 + $\frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to n + 1 + $\frac{\mathrm{T_{HARQ}+3ms}}{NR\ slot\ length}$ as defined in clause 8.3. If both conditions are met, then the number of successes for the event "Deactivation" is increased by one. Otherwise, count a fail for the event "Deactivation".

10. When T3 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 7, or Deactivation in step 8 was not acknowledged, the SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

11. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

12. After the RRC connection release, the SS:
- transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
or
- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

13. Repeat steps 2-12 until a test verdict has been achieved.

Each of the events "Activation" and "Deactivation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

7.5.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 7.5.3.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell; Table H.3.1-1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.5.3.3.4.3-2: *RRCReconfiguration*: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig	Table 7.5.3.3.4.3-2A	
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell	Table 7.5.3.3.4.3-5	
}			
}			
}			
}			

Table 7.5.3.3.4.3-2A: MeasConfig (Table 7.5.3.3.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 7.5.3.3.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 7.5.3.3.4.3-4	
}			
}			
}			
}			

Table 7.5.3.3.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 7.5.3.3.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			

a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 7.5.3.3.4.3-5: CellGroupConfig-SCell (Table 7.5.3.3.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 7.5.3.3.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 7.5.3.3.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 7.5.3.3.4.3-6: ServingCellConfig-SpCell (Table 7.5.3.3.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 7.5.3.3.4.3-7: ServingCellConfig-SCell (Table 7.5.3.3.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

7.5.3.3.5 Test requirement

During T2 the UE shall start sending CSI report for the SCell in the configured slots for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k). UE shall send the first CSI report for SCell after receiving at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k), or in the next available uplink resource for CSI reporting if the slot was subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2, the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot (m+$T_{L1\text{-}RSRP}$), where $T_{L1\text{-}RSRP}$ is no larger than 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ as defined in clause 8.3.2. For this test case, $T_{FirstSSB_MAX}$=T_{SMTC_MAX}=T_{rs}=20ms; $T_{L1\text{-}RSRP,\ measure}$=480ms and $T_{L1\text{-}RSRP,\ report}$=5ms, which allows $T_{L1\text{-}RSRP}$ =1000ms.

During T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot m + $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.7.5.3.3.1-2 of TS 38.133 [6]
- $T_{activation_time}$ = 3ms + $T_{FirstSSB_MAX}$ + 15*T_{SMTC_MAX} + 8*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}, which allows 1030ms
- $T_{CSI_Reporting}$ = 10ms
- NR slot length is 0.125ms for this test case.

During T2, the interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3\text{ms}+T_X}{\text{NR slot length}}$, where T_X =20ms.

During T3, the UE shall stop sending CSI reports for SCell no later than slot n + $\frac{T_{HARQ}+3\text{ms}}{NR\ slot\ length}$, as defined in TS 38.133 [6] clause 8.3.

During T3, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot n + 1 + $\frac{T_{HARQ}}{NR\ slot\ length}$ to n + 1 + $\frac{T_{HARQ}+3\text{ms}}{NR\ slot\ length}$ as defined in clause 8.3.

Table 7.5.3.3.5-1: Cell specific test parameters for FR2 SCell activation in FR2 inter-band

Parameter[Note 5]	Unit	T1		T2		T3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
Downlink initial BWP Configuration		DLBWP.0.1		DLBWP.0.1		DLBWP.0.1	
Downlink dedicated BWP Configuration		DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Uplink initial BWP configuration		ULBWP.0.1		ULBWP.0.1		ULBWP.0.1	
Uplink dedicated BWP configuration		ULBWP.1.1		ULBWP.1.1		ULBWP.1.1	
TRS configuration		TRS.2.1 TDD		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state		TCI.State.0		TCI.State.0		TCI.State.0	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Parameters		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Parameters		CCR.3.1 TDD	-	CCR.3.1 TDD	-	CCR.3.1 TDD	-
CSI-RS configuration		NA	NA	NA	CSI-RS.3.1 TDD Note 2	NA	CSI-RS.3.1 TDD
CSI reporting periodicity [Note 3]		NA	5	NA	5	NA	5
OCNG Patterns		OP.1					
SSB Configuration		SSB.1 FR2					
SMTC Configuration		SMTC.1					
EPRE ratio of PSS to SSS	dB	0					

EPRE ratio of PBCH_DMRS to SSS		
EPRE ratio of PBCH to PBCH_DMRS		
EPRE ratio of PDCCH_DMRS to SSS		
EPRE ratio of PDCCH to PDCCH_DMRS		
EPRE ratio of PDSCH_DMRS to SSS		
EPRE ratio of PDSCH to PDSCH_DMRS		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation conditions		AWGN

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 3: L1-RSRP measurement and reporting are configured to the UE prior to the start of time period T1.

Table 7.5.3.3.5-2: OTA related test parameters for FR2 SCell activation in FR2 inter-band

Parameter Note 6	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 as specified in clause A.9.3					
		AoA1			AoA2		
Assumption for UE beams Note 7		Rough			Rough		
N_{oc} Note1	dBm/15kHz Note4	-97.41			-97.41		
N_{oc} Note1	dBm/SCS Note3	-87.04			-87.04		
$\hat{E}_s / N_{oc}$	dB	1.34			1.34		
SS-RSRP Note2	dBm/SCS Note4	-87.04			-87.04		
$\hat{E}_s / I_{ot}$	dB	1.34			1.34		
Io Note2	dBm/95.04 MHz Note4	-55.66			-55.66		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

7.5.3.4 NR SA FR2 direct SCell activation at SCell addition of known SCell

7.5.3.4.1 Test Purpose

The purpose of this test is to verify that the delay and interruption for direct SCell activation delay at SCell addition are within the requirements stated in TS 38.133 [6] clause 8.3.4.

7.5.3.4.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and supporting 2DL CA and direct SCell activation.

7.5.3.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 7.5.3.0.1 and 7.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.3.4.

7.5.3.4.4 Test description

7.5.3.4.4.1 Initial Conditions

This test shall be tested using the test configuration in Table 7.5.3.4.4.1-1.

Table 7.5.3.4.4.1-1: Supported test configurations for NR SA FR2 SCell activation case

Configuration	Description
7.5.3.4-1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.3.4.4.1-2 and Table 7.5.3.4.4.1-3.

Table 7.5.3.4.4.1-2: Initial conditions for NR SA FR2 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.3.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	- Without LTE link		

Table 7.5.3.4.4.1-3: General test parameters for FR2 SCell activation case with FR2 PSCell

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels (1,2) in FR2 are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured and activated SCell		Cell 2	Configured and activated SCell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	ms	160	
T1	s	7	During this time the measurement for Cell 2 is configured, and Cell 2 is detected.
T2	s	Ndirect	During this time the UE shall configure and activate Cell 2 as SCell.
T3	ms	100	During this time the UE shall report valid CQI for both PCell and SCell.
A3-Offset	dB	-15	
T_{HARQ}	ms	k_1*NR slot length	k1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by dl-DataToUL-ACK, the value of k should be the minimum value defined in TS 38.213 [8]
k	ms	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\ \mu} + 1$	As specified in clause 4.3 of TS38.213 [8]

1.The general test parameter settings are set up according to Table 7.5.3.4.4.1-3.

2. Message contents are defined in clause 7.5.3.4.4.3.

3. There are 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is SCell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

7.5.3.4.4.2 Test Procedure

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two FR2 carriers and two NR cells. Before the test starts the UE is connected to Cell 1 (PCell) on carrier #1, but is not aware of Cell 2 on NR carrier #2. Cell 1 and Cell 2 have constant signal levels throughout the test. The UE is monitoring the PCell. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the Cell 2 is monitored by the UE. During T1, Cell 2 should be detected and measured by the UE such that it meets the condition for known cell defined in TS 38.133 [6] clause 8.3.4 for direct SCell activation.

Time period T2 starts when the *RRCReconfiguration* message for the configuration and activation of Cell 2 (the SCell), which is sent from the test equipment, is received at the UE antenna connector in a slot # denoted m. The test equipment shall set the parameter *sCellState* to *activated* for the SCell, which causes Cell 2 to become configured and activated.

Time period T3 starts at (m + N_{direct}), at which point UE shall be reporting a valid CQI for both PCell and SCell.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during the activation of SCell. The test equipment verifies the activation time by counting the slots from the time when the SCell activation message is sent until a CQI report with other than CQI index 0 is received.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 7.5.3.4.4.1-3 and 7.5.3.4.5**-**1. Propagation conditions are set according to Annex C clauses C.2.2..

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1 and provide measurement configurations.

   3a. The UE sends a *MeasurementReport* message.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. After having received a measurement report containing Cell 2, the SS activates SCC by sending a RRCReconfiguration message to the UE by which it configures the SCell (Cell 2) in activated state as defined in message contents table 7.5.3.4.4.3-5.

6. The UE shall start reporting CSI in PSCell in slot (m+k+$T_{RRC_process}$), where $T_{RRC_process}$ is the RRC procedure delay defined in clause 12 of TS 38.331 [13], and Tx is the time to the end of the first complete the SSB burst as specified in TS 38.133 [6] clause 8.3.4. UE shall report CQI index 0 (out-of-range) until the SCell activation has been completed, and the SS shall monitor CSI reports for SCell sent from the UE according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot m + 1 + $\frac{T_{HARQ}+T_1+\text{TRRC_process}+T_(\text{CSI_Reporting})}{NR\ slot\ length}$,

     - or slot $m + 1 + \frac{T_{HARQ}+\text{TRRC_process}+T_(CSI_Reporting)+T_1+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot m + 1 + $\frac{T_{HARQ}+T_1+\text{TRRC_process}+T_(\text{CSI_Reporting})}{NR\ slot\ length}$ was subject to interruption,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot m + $\frac{N_{\text{direct}}}{\text{NR slot length}}$,

     - or the next available uplink resource if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{N_{\text{direct}}}{\text{NR slot length}}$

   - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+\text{TRRC_process}+T_1+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

   - Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a failure was counted for the event "Activation" in step 6, the SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. After the RRC connection release, the SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
   or
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until a test verdict has been achieved.

Each of the event “Activation” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

7.5.3.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 7.5.3.4.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-7 with Condition Deactivated SCell Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.5.3.4.4.3-2: *RRCReconfiguration*: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig	Table 7.5.3.4.4.3-2A	
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell	Table 7.5.3.4.4.3-5	
}			
}			
}			
}			

Table 7.5.3.4.4.3-2A: MeasConfig (Table 7.5.3.4.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 7.5.3.4.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		

ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 7.5.3.4.4.3-4	
}			
}			
}			
}			

Table 7.5.3.4.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 7.5.3.4.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 7.5.3.4.4.3-5: CellGroupConfig-SCell (Table 7.5.3.4.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 7.5.3.4.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 7.5.3.4.4.3-7	

smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
sCellState-r16	activated		
…			
}			
}			
}			

Table 7.5.3.4.4.3-6: ServingCellConfig-SpCell (Table 7.5.3.4.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 7.5.3.4.4.3-7: ServingCellConfig-SCell (Table 7.5.3.4.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

7.5.3.4.5 Test requirement

Table 7.5.3.4.5-1 defines the cell specific test parameters and Table 7.5.3.4.5-2 defines OTA related test parameters.

Table 7.5.3.4.5-1: Cell specific test parameters for FR2 SCell activation case with FR2 PCell

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2		
Duplex mode	Config 1		TDD					
TDD configuration	Config 1		TDDConf.3.1					
$BW_{channel}$	Config 1	MHz	100: $N_{RB,c}$ = 66					
DL initial BWP configuration	Config 1		DLBWP.0.1					
DL dedicated BWP configuration	Config 1		DLBWP.1.1					
UL initial BWP configuration	Config 1		ULBWP.0.1					
UL dedicated BWP configuration	Config 1		ULBWP.1.1					
Timing offset to Cell 1		ms	Not Applicable			0		
PDSCH Reference measurement channel	Config 1		SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD			CR.3.1 TDD		
RMC CORESET Reference Channel	Config 1		CCR.3.1 TDD			CCR.3.1 TDD		

TRS configuration	Config 1		TRS.2.1 TDD	TRS.2.1 TDD
CSI-RS configuration	Config 1		CSI-RS.3.1 TDD	CSI-RS.3.1 TDD
CSI reporting periodicity	Config 1	ms	5	5
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
SSB configuration	Config 1		SSB.1 FR2	SSB.1 FR2
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table 7.5.3.4.5-2: OTA related test parameters for FR2 SCell activation case with FR2 PSCell

Parameter[Note 6]	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.9.1					
Assumption for UE beams[Note 7]		Rough			Rough		
N_{oc} [Note1]	dBm/15kHz[Note4]	-112			-112		
N_{oc} [Note1]	dBm/SCS[Note 3]	-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB	14			14		
SS-RSRP[Note2]	dBm/SCS [Note4]	-88.97			-88.97		
$\hat{E}_s / I_{ot}$	dB	14			14		
Io[Note2]	dBm/95.04 MHz [Note4]	-59.81			-59.81		

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall complete the direct activation of the SCell no later than at slot $m + \frac{N_{direct}}{\text{NR slot length}}$.

The UE shall report non-zero CQI for SCell from slot $m + \frac{N_{direct}}{\text{NR slot length}}$ and onwards throughout time period T3.

The interruption on PCell during direct activation of the SCell shall occur within the interruption window specified in TS 38.133 [6] clause 8.3.4 and shall not exceed the length specified in TS 38.133 [6] clause 8.2.2.2.11.

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.3.5 NR SA FR2 direct SCell activation at handover with known SCell

7.5.3.5.1 Test Purpose

This test is to verify the requirements specified in TS 38.133 [6] sub clause 8.3.5 for the FR2 intra-frequency handover with direct SCell activation.

7.5.3.5.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and supporting 2DL CA and direct SCell activation.

7.5.3.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 7.5.3.0.1 and 7.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.3.5.

7.5.3.5.4 Test description

7.5.3.5.4.1 Initial Conditions

This test shall be tested using the test configuration in Table 7.5.3.5.4.1-1.

Table 7.5.3.5.4.1-1: Supported test configurations for FR2 handover with direct SCell activation case

Configuration	Description
7.5.3.5-1	SCell: NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.3.5.4.1-2 and Table 7.5.3.5.4.1-3.

Table 7.5.3.5.4.1-2: Initial conditions for NR SA FR2 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.3.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	- Without LTE link		

Table 7.5.3.5.4.1-3: General test parameters for FR2 handover with direct SCell activation case

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two NR radio channels are used for this test, Cell 1 and, Cell2use RF channel 1 and Cell 3 usse RF channel 2 respectively.
A3-Offset		dB	-15	
Time offset between cells			3 μs	Synchronous cells
Initial conditions	Source cell		Cell 1	Source Cell
	Target cell		Cell 2	Neighbour cell
	SCell		Cell 3	SCell is not added and activated
Final condition	Source cell		Cell 2	Cell 2 is Source cell after handover
	Neighbour cell		Cell 1	Neighbour cell

	SCell		Cell 3	SCell is added and activated

1.The general test parameter settings are set up according to Table 7.5.3.5.4.1-3.

2. Message contents are defined in clause 7.5.3.5.4.3.

3. There are 3 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is SCell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

7.5.3.5.4.2 Test procedure

The test scenario comprises of three FR2 cells, one source PCell (Cell 1), one target PCell (Cell 2) and one SCell (Cell 3). The test consists of three successive time periods, with time durations of T1, T2, and T3 respectively.

At the start of time duration T1, the UE is in connected mode with PCell (Cell 1). Both Cell 2 and Cell 3 are known to UE and UE is reporting CQI for all Cell 1.

Time period T2 starts when UE receives a handover command that initiate handover of UE to Cell2 and also activates Cell 3. This is done using an *RRCConnectionReconfiguration* message with parameter *sCellState* set to *activated* for the Cell 3. The message is sent from the test equipment to the UE and is received in a slot number n at the UE antenna connector. The UE shall accomplish the handover, addition and activation of the SCell no later than slot (n $+\frac{N_{direct}}{NR\ slot\ length}$).

Time period T3 starts at (n $+\frac{N_{direct}}{NR\ slot\ length}$), at which point UE shall be reporting a valid CSI for both Cell 2 and Cell 3 as given in tables 7.5.3.5.5-1 and 7.5.3.5.5-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message

2. Set the parameters according to T1 in Tables 7.5.3.5.5-1 and 7.5.3.5.5-2. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.1 and provide measurement configurations.

   3a. The UE sends a *MeasurementReport* message.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. After having received a measurement report containing Cell 3, the SS activates SCC by sending a RRCReconfiguration message to the UE by which it configures the SCell (Cell 3) in activated state as defined in message contents table 7.5.3.5.4.3-5, (it also implies a handover to Cell 2).

6. The UE shall transmit the uplink PRACH channel to Cell 2 less than 62 ms from the beginning of time period T2. The UE shall start reporting CSI in PSCell in slot (m+k+ 1+$T_{interrupt}$ +$T_{RRC_process}$), where $T_{RRC_process}$ is the RRC procedure delay defined in clause 12 of TS 38.331 [13], and Tx is the time to the end of the first complete the SSB burst as specified in TS 38.133 [6] clause 8.3.5. $T_{interrupt}$ is the interruption time during handover as specified in TS 38.133 [6] clause 6.1.1, T_2 is the delay from slot $n + \frac{T_{RRC_Process}+T_{interrupt}}{NR\ slot\ length}$ until UE has obtained a valid TA command for the target PCell and T_3 is the delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to k+1 slot, where k is defined in clause 4.2 in TS 38.213[8], UE shall report CQI index 0 (out-of-range) until the SCell activation has been completed, and the SS shall monitor CSI reports for SCell sent from the UE according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot m + 1 + $\frac{T_{HARQ}+T_{interrupt}+T_2+T_3+TRRC_process+T_(CSI_Reporting)}{NR\ slot\ length}$,
     - or slot $m + 1 + \frac{T_{HARQ}+T_{interrupt}+T_2+T_3+T_(CSI_Reporting)\ +TRRC_process+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot m + 1 + $\frac{T_{HARQ}+T_{interrupt}+T_2+T_3+TRRC_process+T_(CSI_Reporting)}{NR\ slot\ length}$ was subject to interruption, where $N_{interruption}$ is the interruption length given in TS 38.133 [6] clause 8.2.

- and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot m + $\frac{N_{\text{direct}}}{\text{NR slot length}}$,
  - or the next available uplink resource if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{N_{\text{direct}}}{\text{NR slot length}}$.
- and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{\text{TRRC_process} + T_2 + T_3 + T_{interrrupt} + T_{\text{HARQ}} + T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2
- Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a failure was counted for the event "Activation" in step 6, the SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008), and Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
9. After the RRC connection release, the SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
   or
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
10. Repeat steps 2-9 until a test verdict has been achieved.

Each of the event “Activation” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

7.5.3.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 7.5.3.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-7 with Condition Deactivated SCell Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1 Table H.3.2-2 with Condition RBConfig_KeyChange

Table 7.5.3.5.4.3-2: *RRCReconfiguration*: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig	Table 7.5.3.5.4.3-2A	
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell	Table 7.5.3.5.4.3-5	

}			
}			
}			
}			

Table 7.5.3.5.4.3-2A: MeasConfig (Table 7.5.3.5.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 7.5.3.5.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 7.5.3.5.4.3-4	
}			
}			
}			
}			

Table 7.5.3.5.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 7.5.3.5.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 7.5.3.5.4.3-5: CellGroupConfig-SCell (Table 7.5.3.5.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 7.5.3.5.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 7.5.3.5.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
sCellState-r16	activated		
…			
}			
}			
}			

Table 7.5.3.5.4.3-6: ServingCellConfig-SpCell (Table 7.5.3.5.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 7.5.3.5.4.3-7: ServingCellConfig-SCell (Table 7.5.3.5.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

7.5.3.5.5 Test requirement

Table 7.5.3.5.5-1 defines the cell specific test parameters and Table 7.5.3.5.5-2 defines OTA related test parameters.

Table 7.5.3.5.5-1: Cell specific test parameters for FR2 SCell activation case with FR2 PCell

Parameter[Note 5]	Unit	T1			T2			T3		
		Cell 1	Cell 2	Cell 3	Cell 1	Cell 2	Cell 3	Cell 1	Cell 2	Cell 3

SSB ARFCN		freq1	freq1	freq 2	freq1	freq1	freq 2	freq1	freq1	freq2
Duplex mode		TDD			TDD			TDD		
TDD configuration		TDDConf.3.1			TDDConf.3.1			TDDConf.3.1		
Downlink initial BWP Configuration		DLBWP.0.1			DLBWP.0.1			DLBWP.0.1		
Downlink dedicated BWP Configuration		DLBWP.1.1			DLBWP.1.1			DLBWP.1.1		
Uplink initial BWP configuration		ULBWP.0.1			ULBWP.0.1			ULBWP.0.1		
Uplink dedicated BWP configuration		ULBWP.1.1			ULBWP.1.1			ULBWP.1.1		
TRS configuration		TRS.2.1 TDD			TRS.2.1 TDD			TRS.2.1 TDD		
TCI state		TCI.State.0			TCI.State.0			TCI.State.0		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
PDSCH Reference measurement channel		SR.3.1 TDD		-	SR.3.1 TDD		-	SR.3.1 TDD		
RMSI CORESET Parameters		CR.3.1 TDD		-	CR.3.1 TDD		-	CR.3.1 TDD		
Dedicated CORESET Parameters		CCR.3.1 TDD		-	CCR.3.1 TDD		-	CCR.3.1 TDD		
OCNG Patterns		OP.1								
SSB Configuration		SSB.1 FR2								
SMTC Configuration		SMTC.1								
PRACH configuration		FR2 PRACH configuration 1								
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD								
reportConfigType		periodic		-	periodic		-	periodic		-
reportQuantity		cri-RI-PMI-CQI		-	cri-RI-PMI-CQI		-	cri-RI-PMI-CQI		-
CSI reporting periodicity	slot	40		-	40		-	40		-
CSI reporting offset	slot	4		-	4		-	4		-
EPRE ratio of PSS to SSS	dB	0								
EPRE ratio of PBCH_DMRS to SSS										
EPRE ratio of PBCH to PBCH_DMRS										
EPRE ratio of PDCCH_DMRS to SSS										
EPRE ratio of PDCCH to PDCCH_DMRS										
EPRE ratio of PDSCH_DMRS to SSS										
EPRE ratio of PDSCH to PDSCH_DMRS										
EPRE ratio of OCNG DMRS to SSS Note 1										
EPRE ratio of OCNG to OCNG DMRS Note 1										
Propagation conditions		AWGN								

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Void

Table 7.5.3.5.5-2: OTA related test parameters for FR2 SCell activation case

Parameter Note 6	Unit	Cell 1			Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to table A.9.1								
Assumption for UE beams Note 7		Rough			Rough			Rough		

N_{oc} Note1	dBm/15kHz Note4	-112	-112	-112
N_{oc} Note1	dBm/SCS Note3	-102.97	-102.97	-102.97
$\hat{E}_s / N_{oc}$	dB	14	14	14
SS-RSRP Note2	dBm/SCS Note4	-88.97	-88.97+TT	-88.97
$\hat{E}_s / I_{ot}$	dB	14	14+TT	14
Io Note2	dBm/95.04 MHz Note4	-56.89	-56.89	-59.81

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

The UE shall be capable to transmit valid CSI report for PCell (Cell 2) and to the directly activated SCell1 no later than in slot n+ N_{direct}.

The SCell activation delay, N_{direct}, can be expressed as: $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{activation_time} + T_{CSI_Reporting}$ - 3ms; Where:

- $T_{RRC_Process}$: RRC procedure delay defined in clause 12 of TS 38.331 [13] and it is equal to 16ms,
- $T_{interrupt}$: Interruption time during handover as specified in TS 38.133 [6] clause 6.1.1. The value to be verified in the test is 52 ms ($T_{interrupt}$ = 0 ms for T_{search} + 10ms for T_{IU} + 20 ms for $T_{processing}$ + 20ms for T_{Δ} + 2 ms for T_{margin} ms) by assuming known SCell and SMTC.1 configuration.
- T_2: Delay from slot $n + \frac{T_{RRC_Process} + T_{interrupt}}{\text{NR slot length}}$ until UE has obtained a valid TA command for the target PCell,
- T_3: Delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to k+1 slot, where k is defined in clause 4.2 in TS 38.213 [8],
- $T_{activation_time}$ and $T_{CSI_Reporting}$ are specified in TS 38.133 clause 8.3.2 [6], where the following definitions of $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$ as defined in TS 38.133 [6] section 8.3.5 shall apply:

During time period T2 of the test, the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot n + $\frac{T_{HARQ} + T_{activtion_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{SMTC_SCell}$ + 5ms, as defined in TS 38.133 [6] clause 8.3.

During time period T3 of the test, the UE shall stop sending CSI reports for SCell at latest in a slot m + $\frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] clause 8.3.

During time period T2 of the test, interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ} + 3ms + T_X}{\text{NR slot length}} + N_{interruption}$, as defined in TS 38.133 [6] clause 8.3.

During time period T3 of the test, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot m + 1 + $\frac{T_{HARQ}}{NR\ slot\ length}$ to m + 1 + $\frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in TS 38.133 [6] clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During time period T2 of the test, if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in TS 38.133 [6] clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

7.5.3.6 to 7.5.3.12

7.5.3.13 NR SA FR2 SCell Activation for SCell in FR2 intra-band in non-DRX

Editor's note: This test case is incomplete in the following aspects:

- The test is incomplete for test frequencies > 40.8 GHz

7.5.3.13.1 Test Purpose

The purpose of this test is to verify that the delay and interruption for fast SCell activation delay at SCell addition are within the requirements stated in TS 38.133 [6] clause 8.3.16.

7.5.3.13.2 Test applicability

This test applies to all types of NR UE from Release 17 onwards and supporting 2DL CA and fast SCell activation.

7.5.3.13.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.16.

7.5.3.13.4 Test description

7.5.3.13.4.1 Initial Conditions

This test shall be tested using the test configuration in Table 7.5.3.13.4.1-1.

Table 7.5.3.13.4.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.3.13.4.1-2 and Table 7.5.3.13.4.1-3.

Table 7.5.3.13.4.1-2: Initial conditions for NR SA FR2 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.3.13.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	- Without LTE link		

Table 7.5.3.13.4.1-3: General test parameters for FR2 SCell activation case with FR2 PSCell

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) in FR2 are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2

CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
A3-offset	dB	-15	
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [8] that will meet the timing constraints of this test case.
$T_{CSI_Reporting}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331[13]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe},\mu} + 1$	As specified in clause 4.3 of TS 38.213 [8]

1.The general test parameter settings are set up according to Table 7.5.3.13.4.1-3.

2. Message contents are defined in clause 7.5.3.13.4.3.

3. There are 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is SCell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

7.5.3.13.4.2 Test Procedure

The test consists of two successive time periods, with duration of T1and T2, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the SCell and triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n (where n mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot n + $\frac{T_{\text{HARQ}}+T_{\text{activation_time}}+T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in TS 38.133 [6] clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $n + \frac{T_{\text{HARQ}}+3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}}+3\text{ms}+T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in TS 38.133 [6] clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in TS 38.133 [6] clause 8.2.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation of SCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 7.5.3.13.4.1-3 and 7.5.3.13.5**-**1. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1 and provide measurement configurations.

3a. The UE sends a *MeasurementReport* message.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.55) in a slot # denoted n and T2 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 7.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot s_{first_CSI} = n + 1 + $\frac{\mathrm{T_{HARQ}+3ms+}T_{\mathrm{CSI_Reporting}}}{NR\ slot\ length}$,

     - or slot $s^{int}_{first_CSI} = n + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting}+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot s_{first_CSI} was subject to interruption,

     - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI}$ = n + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$, where $\mathrm{T_{activation_time}} = \mathrm{T_{FirstATRS}}$ + 5ms, as defined in TS 38.133 [6] clause 8.3.16,

     - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

     - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if slot $s_{nonzero_CQI}$ was subject to interruption,

   - and DTX is not observed by the SS outside the slot $n + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length} + N_{interruption} + \frac{T_{HARQ}}{NR\ slot\ length}$ up to the end of T2

- Then the number of successes for the event “Activation” is increased by one. Otherwise, count a fail for the event “Activation” and go to step 7.

7. When T2 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event “Activation” in step 6, the SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. After the RRC connection release, the SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
   or
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until a test verdict has been achieved.

The event "Activation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G.2 is achieved.

7.5.3.13.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 7.5.3.13.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-7 with Condition Deactivated SCell

Table 7.5.3.13.4.3-2: *RRCReconfiguration*: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig	Table 7.5.3.13.4.3-2A	
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell	Table 7.5.3.13.4.3-5	
}			
}			
}			
}			

Table 7.5.3.13.4.3-2A: MeasConfig (Table 7.5.3.13.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 7.5.3.13.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 7.5.3.13.4.3-4	
}			
}			
}			
}			

Table 7.5.3.13.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 7.5.3.13.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 7.5.3.13.4.3-5: CellGroupConfig-SCell (Table 7.5.3.13.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 7.5.3.13.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 7.5.3.13.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 7.5.3.13.4.3-6: ServingCellConfig-SpCell (Table 7.5.3.13.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 7.5.3.13.4.3-7: ServingCellConfig-SCell (Table 7.5.3.13.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6 with condition FastActivation_SCell		
servingCellMO	2		
}			

7.5.3.13.5 Test requirement

Table 7.5.3.13.5-1 defines the cell specific test parameters and Table 7.5.3.13.5-2 defines OTA related test parameters.

Table 7.5.3.13.5-1: Cell specific test parameters for FR2 SCell activation case

Parameter[Note 5]	**Unit**	**Cell 1**		**Cell 2**	
		T1	**T2**	**T1**	**T2**
SSB ARFCN		freq1		freq2	
Duplex mode		TDD			
TDD configuration		TDDConf.3.1			
Downlink initial BWP Configuration		DLBWP.0.1			
Downlink dedicated BWP Configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated		66	66		66
PDSCH Reference measurement channel		SR.3.1 TDD		-	
RMSI CORESET Parameters		CR.3.1 TDD		-	
Dedicated CORESET Parameters		CCR.3.1 TDD		-	
OCNG Patterns		OP.1			
SSB Configuration		SSB.1 FR2			
Aperiodic CSI-RS for Scell activation		TRS.2.3 TDD			
gapBetweenBursts	Slot	N/A			
SMTC Configuration		SMTC.1			
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD			
reportConfigType		periodic		N/A	
reportQuantity		cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	slot	40		N/A	
CSI reporting offset	slot	4		N/A	
EPRE ratio of PSS to SSS	dB	0			
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					

EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation conditions		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: Void		

Table 7.5.3.13.5-2: OTA related test parameters for FR2 SCell activation case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 1 according to table A.9.1		Setup 1 according to table A.9.1	
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-104.7		-104.7	
N_{oc} Note1	dBm/SCS Note 3	-95.7		-95.7	
$\hat{E}_s / N_{oc}$	dB	7		7	
SSB_RP Note2	dBm/SCS Note4	-88.7		N/A	
CSI_RP Note2	dBm/SCS Note4	N/A		-88.7	
$\hat{E}_s / I_{ot}$	dB	7		7	
Io Note2	dBm/95.04 MHz Note4	-58.92		-58.92	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: Es/Iot, SSB_RP, CSI_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: Void Note 6: Void Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.					

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $(n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length})$. UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS} + 5ms$, as defined in TS 38.133 [6] clause 8.3.16.

During T2 interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, as defined in TS 38.133 [6] clause 8.3.16.

The interruption on any activated serving cell shall not be more than the values specified for SA in TS 38.133 [6] clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in TS 38.133 [6] clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

7.5.3.14 NR SA FR2 SCell Activation for known SCell in FR2 inter-band

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- This test case is incomplete for Test frequency f > 40.8 GHz
- This test case is incomplete for UE power class other than PC3.

7.5.3.14.1 Test purpose

The purpose of this test is to verify that the fast SCell activation and deactivation times are within the requirements stated in TS 38.133 [6] clause 8.3.16, when the PCell and SCell are in FR2 inter-band and the SCell in FR2 is known by the UE at the time of activation.

7.5.3.14.2 Test applicability

This test applies to all types of NR UE from Release 17 onwards and supporting 2DL CA, and supporting Fast SCell activation.

7.5.3.14.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause 8.3.16.

7.5.3.14.4 Test description

7.5.3.14.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.5.3.14.4.1-1.

Table 7.5.3.14.4.1-1: Supported test configurations for FR2 SCell activation in FR2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.3.14.4.1-2.

Table 7.5.3.14.4.1-2: Initial conditions for FR2 SCell activation in FR2 inter-band

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.3.14.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.3.14.4.1-3.
2. Message contents are defined in clause 7.5.3.14.4.3.
3. There are two NR carriers and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is SCell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.5.3.14.4.1-3: General test parameters for FR2 SCell activation in FR2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS 38.101-2.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	≤8	A random value from 0µs to 8µs
A3-offset	dB	-15	A3-offset
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	2	During this time the UE shall activate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

7.5.3.14.4.2 Test procedure

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m (where m mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot m + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$, as defined in clause 8.3.16. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k) and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to slot $m + 1 + \frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{X}}}{\mathrm{NR\ slot\ length}} + N_{\mathrm{interruption}}$, as defined in clause 8.3, where $N_{\mathrm{interruption}}$ is the interruption length given in clause 8.2

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 7.5.3.14.5-1 and 7.5.3.14.5-2. Propagation conditions are set according to Annex C clauses C.2.2.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1 and provide measurement configurations.

3a. The UE sends a *MeasurementReport* message.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.55) in a slot # denoted m and T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 8.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot s = m + 1 + $\frac{T_{\mathrm{HARQ}}+3\mathrm{ms}+T_{\mathrm{CSI_Reporting}}}{NR\ slot\ length}$,

     - or slot $m + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting}+T_X}{NR\ slot\ length} + N_{interruption} + 1$ if the slot s was subject to interruption,

     - or the next CSI report occasion if there is no CSI report occasion in slots s or s',

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot m + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$,

     - or the next available uplink resource if there are no uplink resources for reporting the valid CSI in a slot m + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time}}+T_{\mathrm{CSI_Reporting}}}{\mathrm{NR\ slot\ length}}$

   - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length} + N_{\mathrm{interruption}}$ up to the end of T2

   - Then the number of successes for the event “Activation” is increased by one. Otherwise, count a fail for the event “Activation” and go to step 8.

7. T2 expires.

8 SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

9. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

10. After the RRC connection release, the SS:
    - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5),
    or
    - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.3.14.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 7.5.3.14.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-7 with condition Deactivated SCell

Table 7.5.3.14.4.3-2: *RRCReconfiguration*: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig	Table 7.5.3.14.4.3-2A	
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell	Table 7.5.3.14.4.3-5	
}			
}			
}			
}			

Table 7.5.3.14.4.3-2A: MeasConfig (Table 7.5.3.14.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 7.5.3.14.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 7.5.3.14.4.3-4	
}			
}			
}			
}			

Table 7.5.3.14.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 7.5.3.14.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 7.5.3.14.4.3-5: CellGroupConfig-SCell (Table 7.5.3.14.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 7.5.3.14.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 7.5.3.14.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 7.5.3.14.4.3-6: ServingCellConfig-SpCell (Table 7.5.3.14.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 7.5.3.14.4.3-7: ServingCellConfig-SCell (Table 7.5.3.14.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1		

	[14] Table 7.3.1-6 with condition FastActivation_SCell		
servingCellMO	2		
}			

7.5.3.14.5 Test requirement

Table 7.5.3.14.5-1 and Table 7.5.3.14.5-2 define the primary level settings including test tolerances.Table 7.5.3.14.5-1: Cell specific test parameters for FR2 SCell activation in FR2 inter-band

Parameter[Note 5]	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
Downlink initial BWP Configuration		DLBWP.0.1		DLBWP.0.1	
Downlink dedicated BWP Configuration		DLBWP.1.1		DLBWP.1.1	
Uplink initial BWP configuration		ULBWP.0.1		ULBWP.0.1	
Uplink dedicated BWP configuration		ULBWP.1.1		ULBWP.1.1	
TRS configuration		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state		TCI.State.0		TCI.State.0	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Parameters		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Parameters		CCR.3.1 TDD	-	CCR.3.1 TDD	-
CSI-RS configuration		NA	NA	NA	CSI-RS.3.1 TDD [Note 2]
CSI reporting periodicity [Note 3]		NA	5	NA	5
OCNG Patterns		OP.1			
SSB Configuration		SSB.1 FR2			
SMTC Configuration		SMTC.1			
Aperiodic CSI-RS for Scell activation		-	-	-	TRS.2.3 TDD
gapBetweenBursts	Slot	N/A		0	
cellIndividualOffset	dB	N/A		16	
EPRE ratio of PSS to SSS	dB	0			
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS[Note 1]					
EPRE ratio of OCNG to OCNG DMRS [Note 1]					
Propagation conditions		AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+$T_{L1\text{-}RSRP}$ during T2.
Note 3: L1-RSRP measurement and reporting are configured to the UE prior to the start of time period T1.

Table 7.5.3.14.5-2: OTA related test parameters for FR2 SCell activation in FR2 inter-band

Parameter[Note 6]	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
AoA setup		Setup 3 as specified in clause A.3.15			
		AoA1		AoA2	
Assumption for UE beams [Note 7]		Rough		Rough	
N_{oc} [Note1]	dBm/15kHz[Note4]	-96.7		-96.7	
N_{oc} [Note1]	dBm/SCS[Note3]	-87.7		-87.7	
$\hat{E}_s / N_{oc}$	dB	0+TT		0+TT	

SS-RSRP Note2	dBm/SCS Note4	-87.7	N/A
CSI-RSRP Note2	dBm/SCS Note4	N/A	-87.7
$\hat{E}_s/I_{ot}$	dB	0+TT	0+TT
Io Note2	dBm/95.04 MHz Note4	-55.7	-55.7

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: All parameters apply for configuration 1
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

During T2 the UE shall start sending CSI report for the SCell in the configured slots for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k). UE shall send the first CSI report for SCell after receiving at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k), or in the next available uplink resource for CSI reporting if the slot was subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{HARQ}+T_{activtion_time}+T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.7.5.3.14.1-2
- $T_{activation_time} = \max(T_{FirstATRS} + 5ms, T_{uncertainty_RRC} + T_{RRC_delay} - T_{HARQ})$
- $T_{CSI_Reporting} = 10ms$
- NR slot length is 0.125ms for this test case.

During T2, the interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{\text{NR slot length}} + N_{interruption}$, where T_X =4ms.

7.5.4 Void

7.5.5 Link recovery procedures

7.5.5.0 Minimum conformance requirements

7.5.5.0.1 Minimum conformance requirements for SSB-based BFD and link recovery procedures

Same as in the clause 5.5.5.0.1.

7.5.5.0.2 Minimum conformance requirements for CSI-RS-based BFD and link recovery procedures

Same as in the clause 5.5.5.0.2.

7.5.5.0.3 Scheduling availability of UE during beam failure detection and candidate beam detection

Same as in the clause 5.5.5.0.3.

7.5.5.0.4 Requirements for Beam Failure Recovery in SCell

Same as in the clause 5.5.5.0.4.

7.5.5.0.5 TRP specific Minimum conformance requirements

[TS 38.133, clause 8.18.3].

7.5.5.0.5.1 Requirements for TRP specific SSB based beam failure detection

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ estimated over the last $T_{Evaluate_BFD_SSB}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB}$ ms period.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 7.5.5.0.5.1-1 for FR2 with scaling factor N, where

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 8.18.2.2-2 for FR2 with scaling factor N=8

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of P_{TRP} defined in Table 7.5.5.0.5.1-1 is defined as 2, if SSB/CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ are overlapped, else it is 1.

Table 7.5.5.0.5.1-1: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR2

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	$Max(50, Ceil(5 \times P \times N*P_{TRP}) \times T_{SSB})$
DRX cycle ≤ 320ms	$Max(50, Ceil(7.5 \times P \times N*P_{TRP}) \times Max(T_{DRX}, T_{SSB}))$
DRX cycle > 320ms	$Ceil(5 \times P \times N*P_{TRP}) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

7.5.5.0.5.2 Requirements for TRP specific CSI-RS based beam failure detection

Same as in the clause 5.5.5.0.6.

7.5.5.0.5.3 Requirements for SSB based candidate beam detection

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$,estimated over the last $T_{Evaluate_CBD_SSB}$ ms period becomes better than the threshold Q_{in_LR} provided SSB_RP and SSB Ês/Iot are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in Table 7.5.5.0.5.3-1 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_SSB}$ is defined in Table 7.5.5.0.5.3-1 for FR2 with scaling factor N=8.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of P_{CBD} used in Table 7.5.5.0.5.3-1 is defined as

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- $P_{CBD} = 1$.

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PSCell in NR-DC

- P_{CBD} = 2 if UE is configured for candidate beam detection on SCell, 1 otherwise.

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for a SCell

- P_{CBD} = Z in EN-DC or NE-DC or SA.
- P_{CBD} = 2* Z in NR-DC.

  Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell
- P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

The values of P_{TRP} defined in Table 7.5.5.0.5.3-1 is defined as 2, if SSB/CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ are overlapped, else it is 1.

Table 7.5.5.0.5.3-1: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR2

Configuration	$T_{Evaluate_CBD_SSB}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$Max(25, Ceil(3 \times P \times N \times P_{CBD} \times P_{TRP}) \times T_{SSB})$
DRX cycle > 320ms	$Ceil(3 \times P \times N \times P_{CBD} \times P_{TRP}) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

7.5.5.0.5.4 Requirements for CSI-RS based candidate beam detection

Same as in the clause 5.5.5.0.6.2.

7.5.5.0.5.5 Requirements for TRP specific Beam Failure Recovery

Same as in the clause 4.5.5.0.5.3.

7.5.5.0.5.6 Scheduling availability of UE during TRP specific beam failure detection

Same as in the clause 5.5.5.0.6.4.

7.5.5.0.5.7 Scheduling availability of UE during TRP specific candidate beam detection

Same as in the clause 5.5.5.0.6.5.

7.5.5.1 NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

7.5.5.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1, and to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5.

7.5.5.1.2 Test applicability

This test applies to all types of NR UE release 15 onwards.

7.5.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.5.1.

7.5.5.1.4 Test description

There is one NR serving cell configured in this test. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.5.1.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate SSB based beam failure. Figure 7.5.5.1.4-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

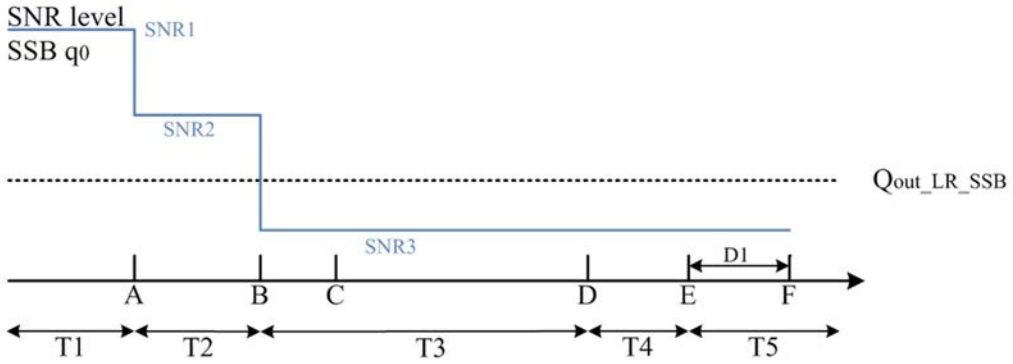

Figure 7.5.5.1.4-1: SNR variation for NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX

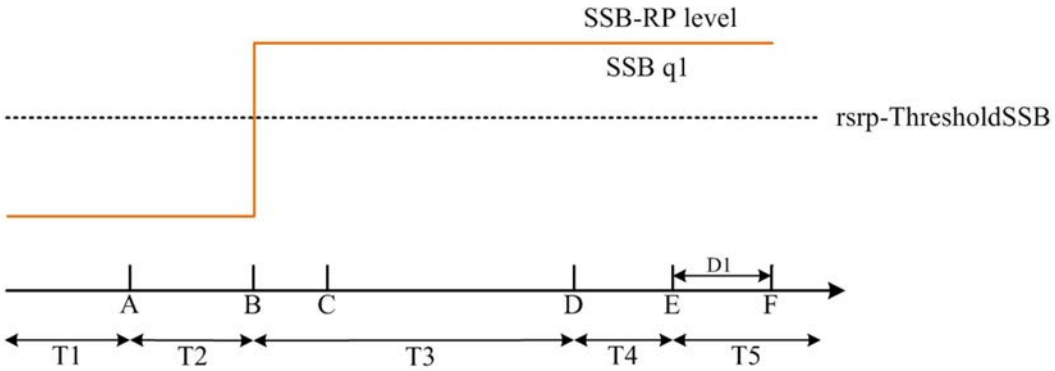

Figure 7.5.5.1.4-2: SSB_RP level variation for NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX

7.5.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.5.1.4.1-1.

Table 7.5.5.1.4.1-1: Supported test configurations for NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX

Configuration	Description
7.5.5.1-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
7.5.5.1-2	TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 7.5.5.1.4.1-2.

Table 7.5.5.1.4.1-2: Initial conditions for NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.5.1.4.1-3. The measurement gap configuration is according to Table 7.5.5.1.4.1-4.

2. Message contents are defined in clause 7.5.5.1.4.3.

3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.5.1.4.1-3: General test parameters for NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1-2		Cell 1	
RF Channel Number		1-2		1	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	Table A.1.5-3
$BW_{channel}$		1-2	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	Table A.8.1-1
DL dedicated BWP configuration		1-2		DLBWP.1.1	Table A.8.1-2
UL initial BWP configuration		1-2		ULBWP.0.1	Table A.8.2-1
UL dedicated BWP configuration		1-2		ULBWP.1.1	Table A.8.2-2
PDSCH Reference Channel		1		SR.3.2 TDD	Table A.1.1.2-3
		2		SR.3.3 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	Table A.1.2.2-3
		2		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	Table A.1.3.2-3
		2		CCR.3.7 TDD	
OCNG parameters		1-2		OP.1	Table A.2.1-1
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	Table A.10.2-1
CSI-RS for tracking		1-2		TRS.2.1 TDD	Table A.1.4A.2.1-1
SSB Configuration		1		SSB.1 FR2	Table A.3.2-1
		2		SSB.2 FR2	
SMTC Configuration		1-2		SMTC.3	Table A.4-1
PRACH Configuration		1-2		PRACH.2 FR2	Table A.7.2-1
DRX configuration		1-2		OFF	
SSB index assigned as BFD RS (q_0)		1-2		0	
SSB index assigned as CBD RS (q_1)		1-2		1	
SSB index assigned as RLM RS		1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		gp0	
gapOffset		1-2	ms	0	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-109 Note 3	Threshold used for $Q_{in_LR_SSB}$
		2		-106 Note 3	
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	Table A.1.4.2-3
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	2.61	
T3		1-2	s	1.64	
T4		1-2	s	0	
T5		1-2	s	1.01	
D1		1-2	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: Including test tolerance given in Annex F.1.3.2.					

Table 7.5.5.1.4.1-4: Void

7.5.5.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms).

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.5.1.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.5.1.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.5.1.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 7.5.5.1.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 7.5.5.1.5-1. T5 starts.

7. If the SS:

a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point B; and

b) does not detect preamble on a beam associated with candidate beam set q_1 before time point B; and

c) detects preamble on a beam associated with candidate beam set q_1 before time point F (D1 after the start of T5),

the number of successful tests is increased by one Otherwise the number of failed tests is increased by one.

8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 7.5.5.1.5-1.

9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 2-10 for until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.5.1.4.3-1: Common Exception messages for NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED; Table H.3.1-3 with condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of High range) Table H.3.1-4 with a3-offset = -6dB; Table H.3.1-6 with condition gapUE and BFD. Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.1-10B

7.5.5.1.5 Test requirement

Tables 7.5.5.1.4.1-3 and 7.5.5.1.5-1 define the primary level settings including test tolerances for NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX.

Table 7.5.5.1.5-1: NR Cell specific test parameters for NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.9				
Assumption for UE beams Note 10		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				

EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-2	dB	13.7 Note 11,12	5.7 Note 11,12	-12	-12	-12
SNR_SSB of set q_1	Config 1-2	dB	0.2	0.2	20 Note 12	20 Note 12	20 Note 12
SSB_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.7	-84.7	-84.7
	Config 2		-101.5	-101.5	-81.7	-81.7	-81.7
N_{oc}	Config 1	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.1.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
Note 10: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband
Note 12: Including test tolerance given in Annex F.1.3.2

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 960+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

7.5.5.2 NR SA FR2 SSB-based beam failure detection and link recovery in DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

7.5.5.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1, and to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5.

7.5.5.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR2 and long DRX cycle.

7.5.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.5.2.

7.5.5.2.4 Test description

There are one NR serving cell configured in this test. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.5.2.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate SSB based beam failure. Figure 7.5.5.2.4-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

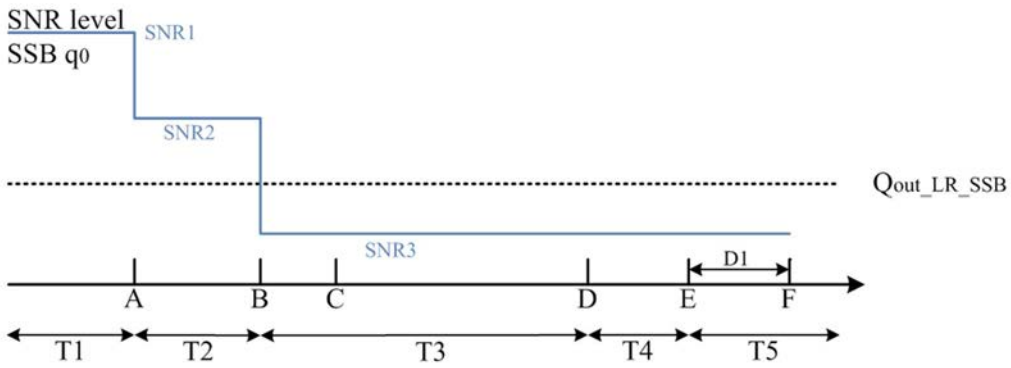

Figure 7.5.5.2.4-1: SNR variation for NR SA FR2 SSB-based beam failure detection and link recovery in DRX

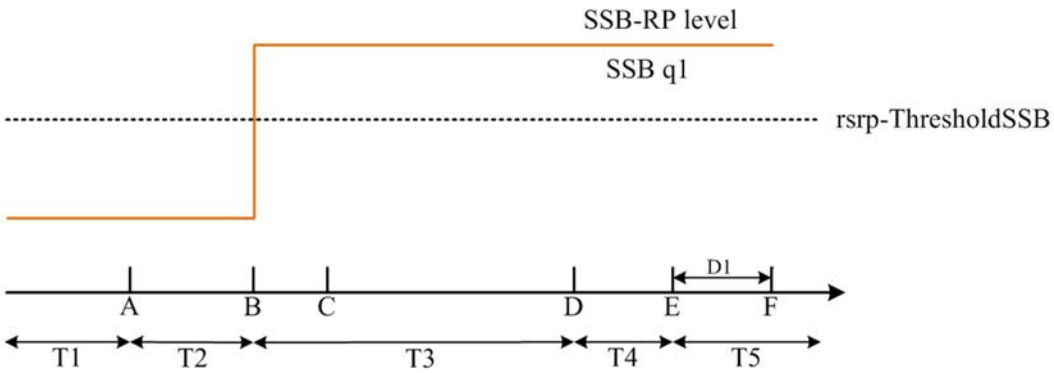

Figure 7.5.5.2.4-2: SSB_RP level variation for NR SA FR2 SSB-based beam failure detection and link recovery in DRX

7.5.5.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.5.2.4.1-1.

Table 7.5.5.2.4.1-1: Supported test configurations for NR SA FR2 SSB-based beam failure detection and link recovery in DRX

Configuration	Description
7.5.5.2-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
7.5.5.2-2	TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 7.5.5.2.4.1-2.

Table 7.5.5.2.4.1-2: Initial conditions for NR SA FR2 SSB-based beam failure detection and link recovery in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.5.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.5.2.4.1-3. The DRX configuration is according to Table 7.5.5.2.4.1-3. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

2. Message contents are defined in clause 7.5.5.2.4.3.

3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.5.2.4.1-3: General test parameters for NR SA FR2 SSB-based beam failure detection and link recovery in DRX

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1-2		Cell 1	
RF Channel Number	1-2		1	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	Table A.1.5-3
$BW_{channel}$	1-2	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	Table A.8.1-1
DL dedicated BWP configuration	1-2		DLBWP.1.1	Table A.8.1-2
UL initial BWP configuration	1-2		ULBWP.0.1	Table A.8.2-1
UL dedicated BWP configuration	1-2		ULBWP.1.1	Table A.8.2-2
PDSCH Reference Channel	1		SR.3.2 TDD	Table A.1.1.2-3
	2		SR.3.3 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	Table A.1.2.2-3
	2		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	Table A.1.3.2-3
	2		CCR.3.7 TDD	
OCNG parameters	1-2		OP.1	Table A.2.1-1
CP length	1-2		Normal	
PDSCH/PDCCH TCI state	1-2		TCI.State.0	Table A.10.2-1
CSI-RS for tracking	1-2		TRS.2.1 TDD	Table A.1.4A.2.1-1
SSB Configuration	1		SSB.1 FR2	Table A.3.2-1

		2		SSB.2 FR2	
SMTC Configuration		1-2		SMTC.3	Table A.4-1
PRACH Configuration		1-2		PRACH.2 FR2	Table A.7.2-1
DRX configuration		1-2		DRX.3	Table A.5-1
SSB index assigned as BFD RS (q_0)		1-2		0	
SSB index assigned as CBD RS (q_1)		1-2		1	
SSB index assigned as RLM RS		1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-109 Note 3	Threshold used for $Q_{in_LR_SSB}$
		2		-106 Note 3	
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	Table A.1.4.2-3
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	3.37	
T3		1-2	s	2.8	
T4		1-2	s	0	
T5		1-2	s	0.61	
D1		1-2	s	0.57	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: Including test tolerance given in Annex F.1.3.2					

Table 7.5.5.2.4.1-4: Void

7.5.5.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.5.2.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.5.2.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.5.2.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 7.5.5.2.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 7.5.5.2.5-1. T5 starts.

7. If the SS:

a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point B; and

b) does not detect preamble on a beam associated with candidate beam set q_1 before time point B; and

c) detects preamble on a beam associated with candidate beam set q_1 before time point F (D1 after the start of T5),

the number of successful tests is increased by one. Otherwise the number of failed tests is increased by one.

8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 7.5.5.2.5-1.

9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.5.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.5.2.4.3-1: Common Exception messages for NR SA FR2 SSB-based beam failure detection and link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.1-10B Table H.3.7-1 with condition DRX.3

7.5.5.2.5 Test requirement

Tables 7.5.5.2.4.1-3 and 7.5.5.2.5-1 define the primary level settings including test tolerances for NR SA FR2 SSB-based beam failure detection and link recovery in DRX.

Table 7.5.5.2.5-1: NR Cell specific test parameters for NR SA FR2 SSB-based beam failure detection and link recovery in DRX

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.9				
Assumption for UE beams Note 10		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					

EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-2	dB	13.7 Note 11,12	5.7 Note 11,12	-12	-12	-12
SNR_SSB of set q_1	Config 1-2	dB	0.2	0.2	20 Note 12	20 Note 12	20 Note 12
SSB_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.7	-84.7	-84.7
	Config 2		-101.5	-101.5	-81.7	-81.7	-81.7
N_{oc}	Config 1-2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.2.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
Note 10: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.
Note 12: Including test tolerance given in

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 560+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

7.5.5.3 NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

7.5.5.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1, and to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5.

7.5.5.3.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting CSI-RS-based RLM and link recovery .

7.5.5.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.5.3.

7.5.5.3.4 Test description

There is one NR serving cell configured in this test. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.5.3.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate CSI-RS based beam failure. Figure 7.5.5.3.4-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

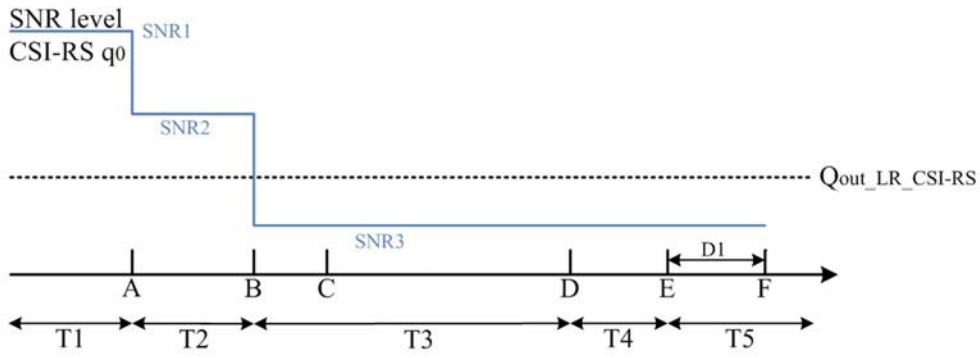

Figure 7.5.5.3.4-1: SNR variation for NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

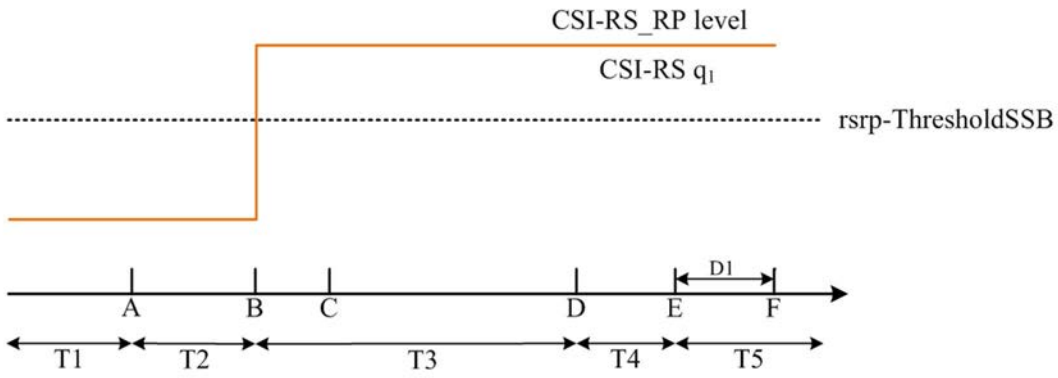

Figure 7.5.5.3.4-2: CSI-RS_RP level variation for NR SA FR2 CSI-RS based beam failure detection and link recovery in non-DRX

7.5.5.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.5.3.4.1-1.

Table 7.5.5.3.4.1-1: Supported test configurations for NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Configuration	Description
7.5.5.3-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 7.5.5.3.4.1-2.

Table 7.5.5.3.4.1-2: Initial conditions for NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.5.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.5.3.4.1-3. The NZP-CSI-RS configuration is according to Table 7.5.5.3.4.1-3.

2. Message contents are defined in clause 7.5.5.3.4.3.

3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.5.3.4.1-3: General test parameters for NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	
RF Channel Number	1		1	
Duplex mode	1		TDD	
TDD Configuration	1		TDDConf.3.1	Table A.1.5-3
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	1		66	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
DL initial BWP configuration	1		DLBWP.0.1	Table A.8.1-1
DL dedicated BWP configuration	1		DLBWP.1.1	Table A.8.1-2
UL initial BWP configuration	1		ULBWP.0.1	Table A.8.2-1
UL dedicated BWP configuration	1		ULBWP.1.1	Table A.8.2-2
PDSCH Reference Channel	1		SR.3.2 TDD	Table A.1.1.2-3
RMSI CORESET Reference Channel	1		CR.3.1 TDD	Table A.1.2.2-3
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	Table A.1.3.2-3
OCNG parameters	1		OP.1	Table A.2.1-1
CP length	1		Normal	
PDSCH/PDCCH TCI state	1		TCI.State.0	Table A.10.2-1
CSI-RS for tracking	1		TRS.2.1 TDD	Table A.1.4A.2.1-1
SSB Configuration	1		SSB.1 FR2	Table A.3.2-1
SMTC Configuration	1		SMTC.3	Table A.4-1
PRACH Configuration	1		PRACH.4 FR2	Table A.7.2-1
DRX configuration	1		OFF	
CSI-RS configuration for BFD/CBD/RLM	1		CSI-RS.3.2 TDD	Table A.1.4.2-3
CSI-RS index assigned as BFD RS (q_0)	1		0	

CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-109 Note 2	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1		CSI-RS.3.1 TDD	Table A.1.4.2-3
reportConfigType		1		periodic	
reportQuantity		1		cri-RI-PMI-CQI	
CSI reporting periodicity		1	slot	40	
CSI reporting offset		1	slot	4	
T310		1	ms	1000	
N310		1		2	
T1		1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1	s	1.17	
T3		1	s	0.9	
T4		1	s	0	
T5		1	s	0.31	
D1		1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: Including test tolerance given in Annex F.1.3.2.					

7.5.5.3.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.5.3.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.5.3.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.5.3.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 7.5.5.3.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 7.5.5.3.5-1. T5 starts.

7. If the SS:

a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point B; and

b) does not detect a preamble on a beam associated with candidate beam set q_1 before time point B; and

c) detects preamble on a beam associated with candidate beam set q_1 beforetime point F (D1 after the start of T5),

the number of successful tests is increased by one. Otherwise the number of failed tests is increased by one.

8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 7.5.5.3.5-1.

9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.5.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.5.5.3.4.3-1: Common Exception messages for NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-10 with Condition CSI-RS Table H.3.1-10A

7.5.5.3.5 Test requirement

Tables 7.5.5.3.4.1-3 and 7.5.5.3.5-1 define the primary level settings including test tolerances for NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX.

Table 7.5.5.3.5-1: NR Cell specific test parameters for NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.9				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	13.7 Note 11,12	5.7 Note 11,12	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	20 Note 12	20 Note 12	20 Note 12
CSI-RS_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	Config 1	dBm/120 KHz	-104.7				

Propagation condition		TDL-A 30ns 75Hz

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.3.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
Note 10: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.
Note 12: Including test tolerance given in Annex F.1.3.2.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 =260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

7.5.5.4 NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

7.5.5.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1, and to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5.

7.5.5.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR2 and CSI-RS-based RLM and link recovery and long DRX cycle.

7.5.5.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.5.4.

7.5.5.4.4 Test description

There is one NR serving cell configured in this test. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.5.4.4-1 shows the five different time durations and the corresponding variation of the downlink SNR in the active cell to emulate CSI-RS based beam failure. Figure 7.5.5.4.4-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

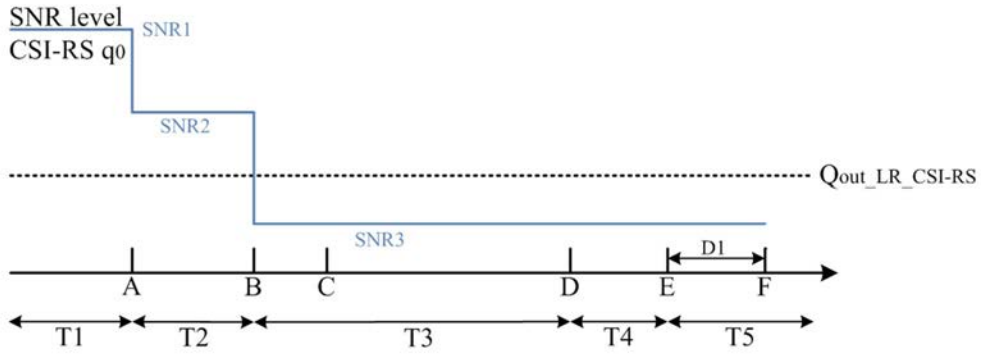

Figure 7.5.5.4.4-1: SNR variation for NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX

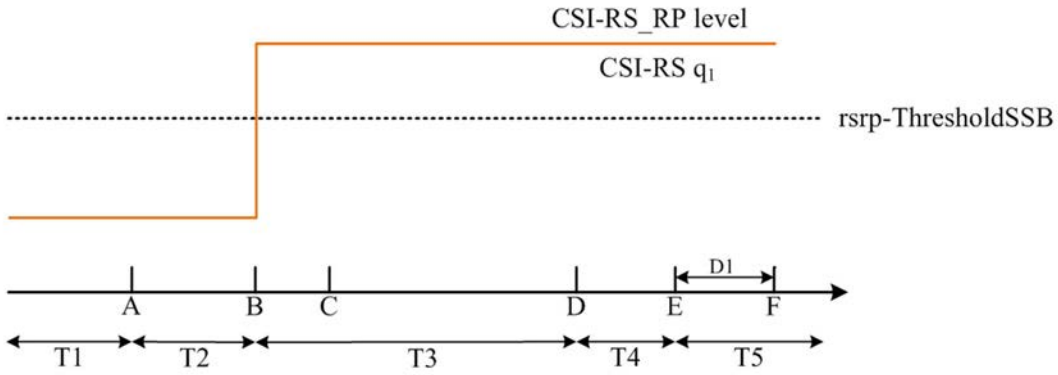

Figure 7.5.5.4.4-2: CSI-RS_RP level variation for NR SA FR2 CSI-RS based beam failure detection and link recovery in DRX

7.5.5.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.5.4.4.1-1.

Table 7.5.5.4.4.1-1: Supported test configurations for NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX

Configuration	Description
7.5.5.4-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 7.5.5.4.4.1-2.

Table 7.5.5.4.4.1-2: Initial conditions for NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.	

Channel bandwidth	As specified by the test configuration selected from Table 6.5.5.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.5.4.4.1-3. The NZP-CSI-RS configuration is according to Table 7.5.5.4.4.1-3. The DRX configuration for is according to Table 7.5.5.4.4.1-3. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

2. Message contents are defined in clause 7.5.5.4.4.3.

3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.5.4.4.1-3: General test parameters for NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1		Cell 1	
RF Channel Number		1		1	
Duplex mode		1		TDD	
TDD Configuration		1		TDDConf.3.1	Table A.1.5-3
$BW_{channel}$		1	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1		66	
PDSCH/PDCCH subcarrier spacing		1	kHz	120	
DL initial BWP configuration		1		DLBWP.0.1	Table A.8.1-1
DL dedicated BWP configuration		1		DLBWP.1.1	Table A.8.1-2
UL initial BWP configuration		1		ULBWP.0.1	Table A.8.2-1
UL dedicated BWP configuration		1		ULBWP.1.1	Table A.8.2-2
PDSCH Reference Channel		1		SR.3.2 TDD	Table A.1.1.2-3
RMSI CORESET Reference Channel		1		CR.3.1 TDD	Table A.1.2.2-3
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	Table A.1.3.2-3
OCNG parameters		1		OP.1	Table A.2.1-1
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	Table A.10.2-1
CSI-RS for tracking		1		TRS.2.1 TDD	Table A.1.4A.2.1-1
SSB Configuration		1		SSB.1 FR2	Table A.3.2-1
SMTC Configuration		1		SMTC.3	Table A.4-1
PRACH Configuration		1		PRACH.4 FR2	Table A.7.2-1
DRX configuration		1		DRX.3	Table A.5-1
CSI-RS configuration for BFD/CBD/RLM		1		CSI-RS.3.2 TDD	Table A.1.4.2-3
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	

Gap pattern ID	1		N/A	
rlmInSyncOutOfSyncThreshold	1		absent	Value 0 is applied. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS	-109 Note 2	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer	1		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting	1		CSI-RS.3.1 TDD	Table A.1.4.2-3
reportConfigType	1		periodic	
reportQuantity	1		cri-RI-PMI-CQI	
CSI reporting periodicity	1	slot	40	
CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	
T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	5.43	
T3	1	s	5.16	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: Including test tolerance given in Annex F.1.3.2				

Table 7.5.5.4.4.1-4: Void

7.5.5.4.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.5.4.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.5.4.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.5.4.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 7.5.5.4.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 7.5.5.4.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect preamble on a beam associated with candidate beam set q_1 before time point B; and

   c) detects preamble on a beam associated with candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one. Otherwise the number of failed tests is increased by one.

8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 7.5.5.4.5-1.

9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.5.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.5.4.4.3-1: Common Exception messages for NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-10 with Condition CSI-RS Table H.3.1-10A Table H.3.7-1 with Condition DRX.3

7.5.5.4.5 Test requirement

Tables 7.5.5.4.4.1-3 and 7.5.5.4.5-1 define the primary level settings including test tolerances for NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX.

Table 7.5.5.4.5-1: NR Cell specific test parameters for NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.9				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	13.7 Note 11,12	5.7 Note 11,12	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	20 Note 12	20 Note 12	20 Note 12
CSI-RS_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	Config 1	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.4.4-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
Note 10:	Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband.
Note 12:	Including test tolerance given in Annex F.1.3.2.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

7.5.5.5 NR SA FR2 scheduling availability restriction during SSB-based beam failure detection and link recovery in non-DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

BFD RS configuration and test procedure require further analysis based on recent changes in TS38.133.

7.5.5.5.1 Test purpose

The purpose of this test is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used, and to verify the scheduling availability restriction requirements for SSB based beam failure detection and link recovery for an FR2 serving cell in TS 38.133 [6] clause 8.5.7 and 8.5.8.

7.5.5.5.2 Test applicability

This test applies to all types of NR UE release 15 onwards.

7.5.5.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.5.5.

7.5.5.5.4 Test description

There is one NR serving cell configured in this test. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.5.5.4-1 shows the variation of the downlink SNR of the SSB index 0 in the active cell to emulate SSB based beam failure. Figure 7.5.5.5.4-2 shows the variation of the downlink L1-RSRP of the SSB index 1 used for link recovery.

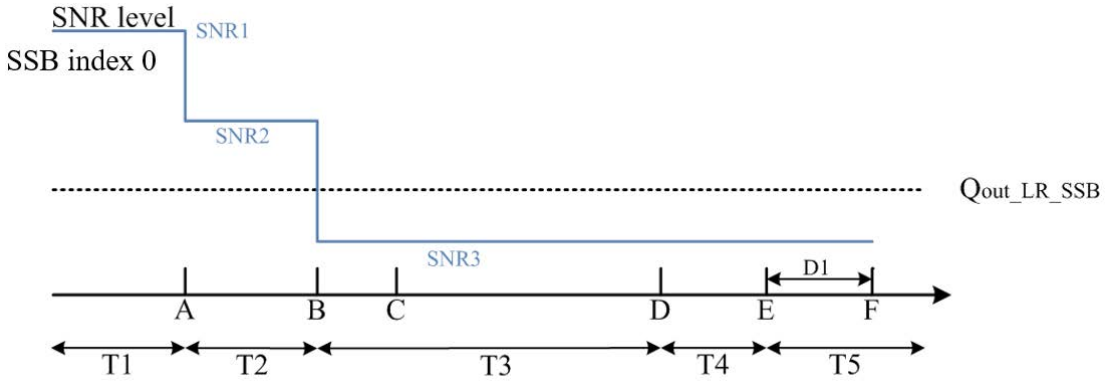

Figure 7.5.5.5.4-1: SNR variation for NR SA FR2 scheduling availability restriction during SSB-based beam failure detection and link recovery in non-DRX

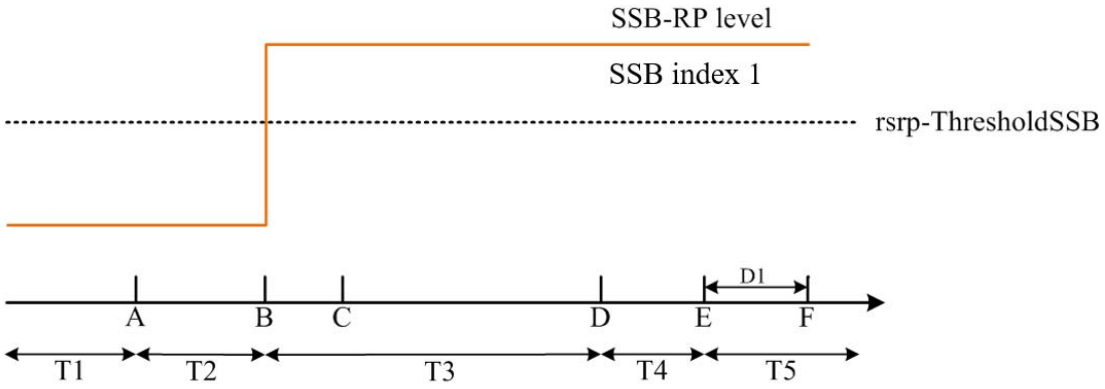

Figure 7.5.5.5.4-2: SSB_RP level variation for NR SA FR2 scheduling availability restriction during SSB-based beam failure detection and link recovery in non-DRX

7.5.5.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.5.5.4.1-1.

Table 7.5.5.5.4.1-1: Supported test configurations for NR SA FR2 scheduling availability restriction during SSB-based beam failure detection and link recovery in non-DRX

Configuration	Description
7.5.5.5-1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.5.5.5-2	NR 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.5.5.5.4.1-2.

Table 7.5.5.5.4.1-2: Initial conditions for NR SA FR2 scheduling availability restriction during SSB-based beam failure detection and link recovery in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.5.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.5.5.4.1-3.
2. Message contents are defined in clause 7.5.5.5.4.3.
3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.5.5.4.1-3: General test parameters for NR SA FR2 scheduling availability restriction during SSB-based beam failure detection and link recovery in non-DRX

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1-2		Cell 1	
RF Channel Number		1-2		1	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	Table A.1.5-3
$BW_{channel}$		1-2	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	Table A.8.1-1
DL dedicated BWP configuration		1-2		DLBWP.1.1	Table A.8.1-2
UL initial BWP configuration		1-2		ULBWP.0.1	Table A.8.2-1
UL dedicated BWP configuration		1-2		ULBWP.1.1	Table A.8.2-2
PDSCH Reference Channel		1		SR.3.2 TDD	Table A.1.1.2-3
		2		SR.3.3 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	Table A.1.2.2-3
		2		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	Table A.1.3.2-3
		2		CCR.3.7 TDD	
OCNG parameters		1-2		OP.1	Table A.2.1-1
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	Table A.10.2-1
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	Table A.3.2-1
		2		SSB.2 FR2	
SMTC Configuration		1-2		SMTC.1	Table A.4-1
PRACH Configuration		1-2		PRACH.2 FR2	Table A.7.2-1
DRX configuration		1-2		OFF	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	

	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-109 Note 3	Threshold used for $Q_{in_LR_SSB}$
		2		-106 Note 3	
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	Table A.1.4.2-3
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	2.6	
T3		1-2	s	1.64	
T4		1-2	s	0	
T5		1-2	s	1.01	
D1		1-2	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: Including test tolerance given in Annex F.1.3.2.					

7.5.5.5.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. This test will focus on the scheduling availability during beam failure detection and candidate beam detection. In the test, DRX configuration is not enabled. During the test the UE is scheduled to transmit continuously in UL.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.5.5.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.5.5.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.5.5.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 7.5.5.5.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 7.5.5.5.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) which are not overlapped with SSBs configured for beam failure detection during the period from time point B to time point D

   and

b) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point D until T5 expires,

the number of successful tests is increased by one.

Otherwise the number of failed tests is increased by one.

8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 7.5.5.5.5-1.

9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.5.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.5.5.4.3-1: Common Exception messages for NR SA FR2 scheduling availability restriction during SSB-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A

7.5.5.5.5 Test requirement

Table 7.5.5.5.4.1-3 and 7.5.5.5.5-1 define the primary level settings including test tolerances for NR SA FR2 scheduling availability restriction during SSB-based beam failure detection and link recovery in non-DRX.

Table 7.5.5.5.5-1: NR Cell specific test parameters for NR SA FR2 scheduling availability restriction during SSB-based beam failure detection and link recovery in non-DRX

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA Setup			Setup1 defined in A.9.1				
Assumption for UE beams Note 10			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SSB index assigned as BFD RS (q_0)	Config 1-2		0	0	Note 13		
SSB index assigned as CBD RS (q_1)	Config 1-2		1	1	1	1	1
SNR of SSB index 0	Config 1-2	dB	13.7 Note 11,12	5.7 Note 11,12	-12	-12	-12
SNR of SSB index 1	Config 1-2	dB	0.2	0.2	20 Note 12	20 Note 12	20 Note 12
SSB_RP of SSB index 1	Config 1	dBm/SCS kHz	-104.5	-104.5	-84.7 Note 12	-84.7 Note 12	-84.7 Note 12
	Config 2		-101.5	-101.5	-81.7 Note 12	-81.7 Note 12	-81.7 Note 12

N_{oc}	Config 1	dBm/12 0KHz	-104.7
Propagation condition			TDL-A 30ns 75Hz

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.5.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
Note 10: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.
Note 12: Including test tolerance given in Table F.1.3.2-4
Note 13: BFD RS (q0) is configured as SSB index 0 at the start of T3, and it is reconfigured by RRC as SSB index 1 after the UE transmits the preamble on a beam associated with the candidate beam set q1.

The UE behaviour during time duration T3 follows the requirements defined in TS 38.133 [6] clause 8.5.7.3:

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in TS 38.133 [6] clause 8.5.8.3:

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

7.5.5.6 NR SA FR2 Scell CSI-RS-based beam failure detection and link recovery in non-DRX

Editor's Note:

- This test case is incomplete for Test frequency f > 40.8 GHz
- This test case is incomplete for UE power class other than PC3.

7.5.5.6.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in TS 38.133 [6] clause 8.5.

7.5.5.6.2 Test applicability

This test applies to all types of NR UE release 16 onwards supporting SCell BFR.

7.5.5.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.5.0.2 and 7.5.5.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.5.6.

7.5.5.6.4 Test description

There are two cells configured in this test. Cell 1 is the active PCell and Cell 2 is the active SCell. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.5.6.4-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure 7.5.5.6.4-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

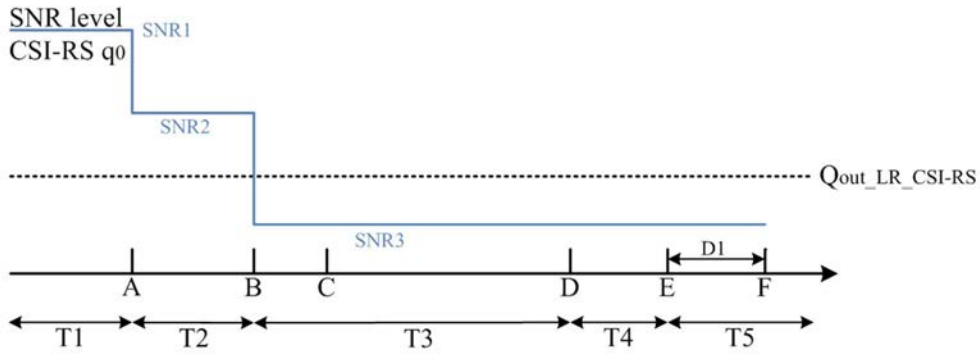

Figure 7.5.5.6.4-1: SNR variation for CSI-RS based beam failure detection and link recovery testing for SCell in non-DRX mode

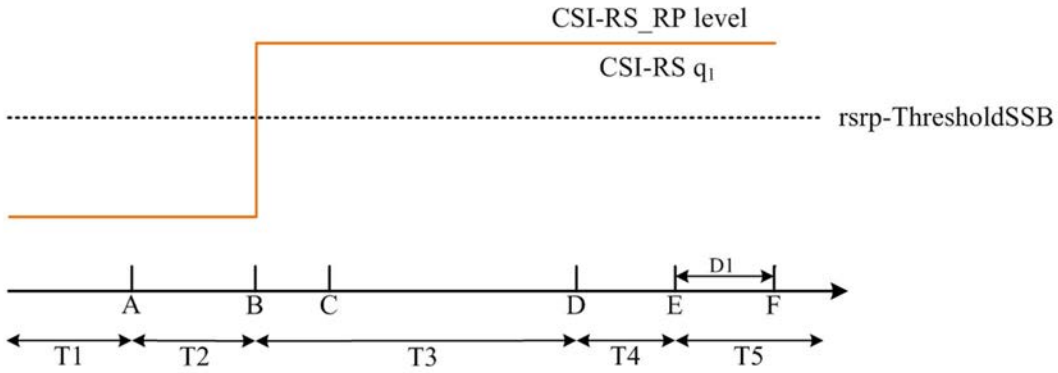

Figure 7.5.5.6.4-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in non-DRX mode

7.5.5.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.5.6.4.1-1.

Table 7.5.5.6.4.1-1: Supported test configurations for SA FR2 SCell beam failure detection and link recovery testing in non-DRX

Configuration	Description
7.5.5.6-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.5.5.6.4.1-2.

Table 7.5.5.6.4.1-2: Initial conditions for SA FR2 SCell beam failure detection and link recovery testing in non-DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	

Channel bandwidth	As specified by the test configuration selected from Table 7.5.5.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.5.6.4.1-3.
2. Message contents are defined in clause 7.5.5.6.4.3.
3. There are two NR cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.5.6.4.1-3: General test parameters for FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1		Cell 1	
RF Channel Number for PCell		1		1	
Active SCell		1		Cell 2	
RF Channel Number for SCell		1		2	
Duplex mode		1		TDD	
TDD Configuration		1		TDDConf.3.1	
$BW_{channel}$		1	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1		66	
PDSCH/PDCCH subcarrier spacing		1	kHz	120	
DL initial BWP configuration		1		DLBWP.0.1	
DL dedicated BWP configuration		1		DLBWP.1.1	
UL initial BWP configuration		1		ULBWP.0.1	
UL dedicated BWP configuration		1		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	A.1.2.2
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	A.2.1
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.3 FR2	A.3
SMTC Configuration		1		SMTC.3	A.4
PRACH Configuration		1		FR2 PRACH configuration 4	Table A.7.2-1
DRX configuration		1		OFF	
CSI-RS configuration for BFD/CBD on SCell		1		CSI-RS.3.2 TDD	A.1.4.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS configuration for RLM on PCell		1		CSI-RS.3.2 TDD	A.1.4.2
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	

	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	
schedulingRequestID-BFR-SCell-r16		1		Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		1	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell		1	slot	4	
PUCCH parameters for SR configuration for BFR on SCell		1		Table 8.3.3.1.2-1 in [28]	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (Table 8.1.1-1 in TS 38.133 [6]).
rsrp-ThresholdSSB		1	dBm/SCS	-109 Note 2	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1		CSI-RS.3.1 TDD	A.1.4.2
reportConfigType		1		periodic	
reportQuantity		1		cri-RI-PMI-CQI	
CSI reporting periodicity		1	slot	40	
CSI reporting offset		1	slot	4	
T310		1	ms	1000	
N310		1		2	
T1		1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1	s	1.17	
T3		1	s	0.9	
T4		1	s	0	
T5		1	s	0.31	
D1		1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: Including test tolerance given in Annex F.1.3.2					

7.5.5.6.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. During the test the UE is scheduled to transmit continuously in UL.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

2. The SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 7.5.5.6.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

3. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10).

4. Set the parameters of NR Cell 1 and Cell 2 according to T1 in Table 7.5.5.6.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.5.6.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.5.6.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 7.5.5.6.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 7.5.5.6.5-1. T5 starts.
9. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-2 [18] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect PUCCH with LRR before time point B, and

   c) detects PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

10. When T5 expires the SS shall change the SNR value to T1 as specified in Table 7.5.5.6.5-1.
11. If the iteration fails, the SS shall first attempt to release and add the FR2 SCell. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration, and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.
12. Repeat steps 2-11 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.5.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.5.6.4.3-1: Common Exception messages for SA FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-12 on Cell 3 Table H.3.1-13 on Cell 3

Table 7.5.5.6.4.3-2: MAC-CellGroupConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-68			
Information Element	**Value/remark**	**Comment**	**Condition**
MAC-CellGroupConfig ::= SEQUENCE {			
schedulingRequestID-BFR-SCell-r16	SchedulingRequestId		
}			

Table 7.5.5.6.4.3-3: *SchedulingRequestResourceConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-157			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
sl40	4		
}			
}			

7.5.5.6.5 Test requirement

Tables 7.5.5.6.4.1-3 and 7.5.5.6.5-1 define the primary level settings including test tolerances for SA FR2 SCell for beam failure detection and link recovery testing in non-DRX.

Table 7.5.5.6.5-1: NR Cell specific test parameters for SA FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Cell1	Cell2 Test 1				
			T1 to T5	T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.9.1	Setup 1 defined in A.9.1				
Assumption for UE beams[Note 10]			Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	13.7	5.7	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	0.2	20	20	20
CSI-RS_RP of set q_1	Config 1	dBm/SCS kHz	-104.5	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	Config 1	dBm/120kHz	-104.7	-104.7				
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.6.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
Note 10: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6], and does not limit UE implementation or test system implementation

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1. The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

7.5.5.7 NR SA FR2 Scell CSI-RS-based beam failure detection and link recovery in DRX

Editor's Note:

- This test case is incomplete for Test frequency f > 40.8 GHz
- This test case is incomplete for UE power class other than PC3.

7.5.5.7.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in TS 38.133 [6] clause 8.5.

7.5.5.7.2 Test applicability

This test applies to all types of NR UE release 16 onwards supporting SCell BFR.

7.5.5.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.5.0.2 and 7.5.5.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.5.7.

7.5.5.7.4 Test description

There are two cells configured in this test. Cell 1 is the active PCell and Cell 2 is the active SCell. This test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.5.7.4-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure 7.5.5.7.4-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

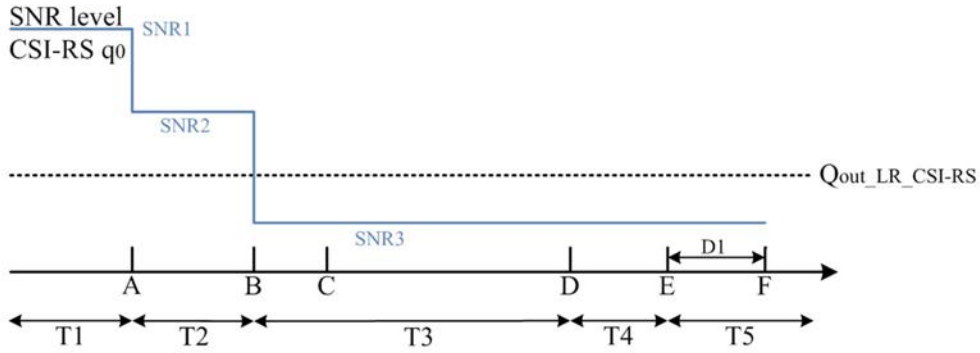

Figure 7.5.5.7.4-1: SNR variation for CSI-RS based beam failure detection and link recovery testing for SCell in DRX mode

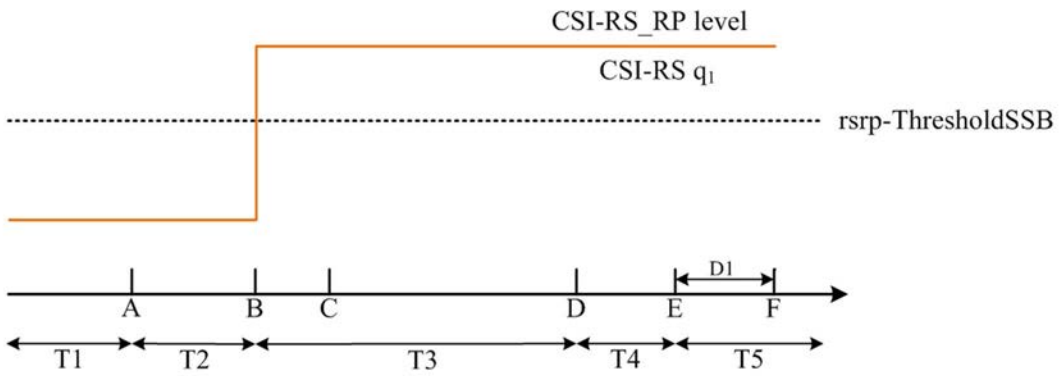

Figure 7.5.5.7.4-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in DRX mode

7.5.5.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.5.7.4.1-1.

Table 7.5.5.7.4.1-1: Supported test configurations for SA FR2 SCell beam failure detection and link recovery testing in DRX

Configuration	Description
7.5.5.7-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.5.5.7.4.1-2.

Table 7.5.5.7.4.1-2: Initial conditions for SA FR2 SCell beam failure detection and link recovery testing in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.5.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.5.7.4.1-3.
2. Message contents are defined in clause 7.5.5.7.4.3.
3. There are two NR cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.5.7.4.1-3: General test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	
RF Channel Number for PCell	1		1	

Active SCell		1		Cell 2	
RF Channel Number for SCell		1		2	
Duplex mode		1		TDD	
TDD Configuration		1		TDDConf.3.1	
$BW_{channel}$		1	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		1		66	
PDSCH/PDCCH subcarrier spacing		1	kHz	120	
DL initial BWP configuration		1		DLBWP.0.1	
DL dedicated BWP configuration		1		DLBWP.1.1	
UL initial BWP configuration		1		ULBWP.0.1	
UL dedicated BWP configuration		1		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	A.1.2.2
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	A.2.1
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.3 FR2	A.3
SMTC Configuration		1		SMTC.3	A.4
PRACH Configuration		1		FR2 PRACH configuration 4	Table A.7.2-1
DRX configuration		1		DRX.3	A.5
CSI-RS configuration for BFD/CBD on SCell		1		CSI-RS.3.2 TDD	A.1.4.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS configuration for RLM on PCell		1		CSI-RS.3.2 TDD	A.1.4.2
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	
schedulingRequestID-BFR-SCell-r16		1		Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		1	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell		1	slot	4	
PUCCH parameters for SR configuration for BFR on SCell		1		Table 8.3.3.1.2-1 in [28]	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (Table 8.1.1-1 in TS 38.133 [6]).
rsrp-ThresholdSSB		1	dBm/SCS	-109 Note 2	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1		CSI-RS.3.1 TDD	A.1.4.2
reportConfigType		1		periodic	
reportQuantity		1		cri-RI-PMI-CQI	
CSI reporting periodicity		1	slot	40	

CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	
T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	5.43	
T3	1	s	5.16	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: Including test tolerance given in Annex F.1.3.2				

7.5.5.7.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test. During the test the UE is scheduled to transmit continuously in UL.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

2. The SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 7.5.5.7.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

3. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10).

4. Set the parameters of NR Cell 1 and Cell 2 according to T1 in Table 7.5.5.7.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.5.7.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 7.5.5.7.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 7.5.5.7.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 7.5.5.7.5-1. T5 starts.

9. If the SS:

   a) detects uplink power on NR carrier in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect PUCCH with LRR before time point B, and

   c) detects PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

10. When T5 expires the SS shall change the SNR value to T1 as specified in Table 7.5.5.7.5-1.

11. If the iteration fails, the SS shall first attempt to release and add the FR2 SCell. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration, and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

12. Repeat steps 2-11 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.5.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.5.7.4.3-1: Common Exception messages for SA FR2 SCell for beam failure detection and link recovery testing in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-12 on Cell 3 Table H.3.1-13 on Cell 3 Table H.3.7-1 with condition DRX.3

Table 7.5.5.7.4.3-2: MAC-CellGroupConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-68			
Information Element	**Value/remark**	**Comment**	**Condition**
MAC-CellGroupConfig ::= SEQUENCE {			
schedulingRequestID-BFR-SCell-r16	SchedulingRequestId		
}			

Table 7.5.5.7.4.3-3: *SchedulingRequestResourceConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-157			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
sl40	4		
}			
}			

7.5.5.7.5 Test requirement

Tables 7.5.5.7.4.1-3 and 7.5.5.7.5-1 define the primary level settings including test tolerances for SA FR2 SCell for beam failure detection and link recovery testing in DRX.

Table 7.5.5.7.5-1: NR Cell specific test parameters for SA FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Cell1	Cell2 Test 1				
		T1 to T5	T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.9.1	Setup 1 defined in A.9.1				
Assumption for UE beams[Note 10]		Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						
EPRE ratio of PDSCH to PDSCH DMRS	dB						

EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	13.7	5.7	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	0.2	20	20	20
CSI-RS_RP of set q_1	Config 1	dBm/SCS kHz	-104.5	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	Config 1	dBm/120kHz	-104.7	-104.7				
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.7.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4.
Note 10: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6], and does not limit UE implementation or test system implementation

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 260+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1. The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

7.5.5.8 FFS

FFS.

7.5.5.9 NR SA FR2 SCell TRP specific CSI-RS-based Beam Failure Detection and Link Recovery in DRX

Editor's Note:

- This test case is incomplete for Test frequency f > 40.8 GHz
- This test case is incomplete for UE power class other than PC3.
- TS 38.522 applicability spec update is pending

7.5.5.9.1 Test purpose

The purpose of this test is to verify that the UE properly detects TRP specific CSI-RS-based beam failure and link recovery in the sets $\bar{q}_{0,0}$ and $\bar{q}_{1,0}$ for TRP1 when DRX is used for an FR2 active Scell requirements in TS38.133[6] clause 8.18.

7.5.5.9.2 Test applicability

This test applies to all types of NR UE release 17 onwards supporting TRP specific SCell BFR.

7.5.5.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.5.0.2 and 7.5.5.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.5.9.

7.5.5.9.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.5.9.4-1shows the variation of the downlink SNR of the CSI-RS in set $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ in the active SCell for TRP0 and TRP1 respectively. Figure 7.5.5.9.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in $\bar{q}_{1,0}$ for TPR0.

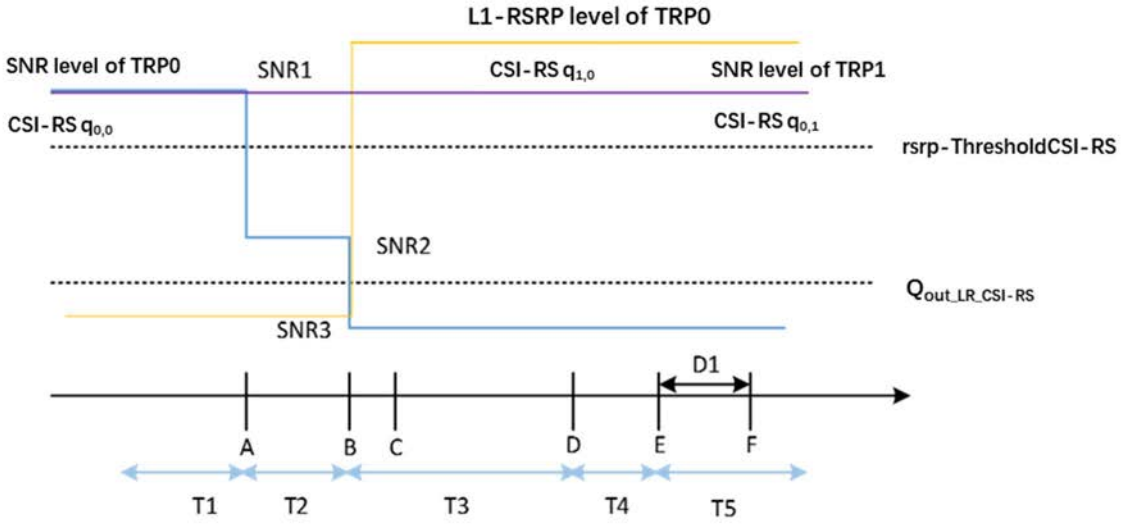

Figure 7.5.5.9.4-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing for SCell in DRX mode

7.5.5.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.5.9.4.1-1.

Table 7.5.5.9.4.1-1: Supported test configurations for FR2 PCell and SCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Configure the test equipment and the DUT according to the parameters in Table 7.5.5.9.4.1-2.

Table 7.5.5.9.4.1-2: Initial conditions for SA FR2 beam failure detection and link recovery testing in DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the test configuration selected from Table 7.5.5.9.4.1-1.	

Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.5.9.4.1-3.
2. Message contents are defined in clause 7.5.5.9.4.3.
3. There are two NR cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.5.9.4.1-3: General test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCell			2	
Duplex mode	Config 1		TDD	
BW channel	Config 1		100: $N_{RB,c}$ = 66	
DL initial BWP configuration	Config 1		DLBWP.0.1	
DL dedicated BWP configuration	Config 1		DLBWP.1.1	
UL initial BWP configuration	Config 1		ULBWP.0.1	
UL dedicated BWP configuration	Config 1		ULBWP.1.1	
TDD Configuration	Config 1		TDDConf.3.1	
CORESET Reference Channel	Config 1		CR.3.1 TDD	A.3.1.2
SSB Configuration	Config 1		SSB.3 FR2	A.3.11
SMTC Configuration	Config 1		SMTC.3	A.3.10
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz	
PRACH Configuration	Config 1		Table A.3.8.3.1-1	
CSI-RS configuration for TRP0	Config 1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS configuration for TRP1	Config 1		CSI-RS.3.6 TDD	A.3.14.2
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.3.1 TDD	A.3.14.2
TRS configuration	Config 1		TRS.2.1 TDD	
TCI configuration	Config 1		CSI-RS.Config.0	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.3	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		Slot	40	5ms

Offset of PUCCH for SR configuration for BFR on SCell		Slot	5	
PUCCH parameters for SR configuration for BFR on SCell			Table 8.3.3.1.2-1 in [13]	
csi-RS-Index assigned as BFD RS in set (q00)			0	
csi-RS-Index assigned as BFD RS in set (q01)			2	
CSI-RS index assigned as RLM RS			0, 1	
CSI-RS Index assigned as CBD RS in set (q10)			1	
CSI-RS Index assigned as CBD RS in set (q11)			3	
SSB index assigned as RLM RS			0, 1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1	dBm/SCS	-109 Note 2	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	10.81	
T3		s	10.28	
T4		s	0	
T5		s	0.57	
D1		s	0.53	
Note 1: UE-specific PDCCH is not transmitted after T1 starts. Note 2: Including test tolerance given in Annex F.1.3.2.				

7.5.5.8.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

2. The SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 7.5.5.9.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete.

3. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10).

4. Set the parameters of NR Cell 1 and Cell 2 according to T1 in Table 7.5.5.9.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR1 and SNR2 values to T2 as specified in Table 7.5.5.9.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR1 and SNR2 values to T3 as specified in Table 7.5.5.9.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR1 and SNR2 values to T4 as specified in Table 7.5.5.9.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR1 and SNR2 values to T5 as specified in Table 7.5.5.9.5-1. T5 starts.

9. If the SS:

   a) detects uplink power on NR carrier in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect PUCCH with LRR before time point B, and

   c) detects PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_{10} and q_{11} before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

10. When T5 expires the SS shall change the SNR value to T1 as specified in Table 7.5.5.7.5-1.

11. If the iteration fails, the SS shall first attempt to release and add the FR2 SCell. If that also fails, then the UE is switched OFF/ON to proceed with the next iteration, and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

12. Repeat steps 2-11 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.5.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.5.7.4.3-1: Common Exception messages for SA FR2 SCell for beam failure detection and link recovery testing in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8A with Condition CSI-RS BFD Table H.3.1-12A on Cell 3 Table H.3.1-13 on Cell 3 with condition SpCell Table H.3.7-1 with condition DRX.3

Table 7.5.5.7.4.3-2: *MAC-CellGroupConfig for R17 BFR*

Derivation Path: TS 38.508-1, Table 4.6.3-68			
Information Element	Value/remark	Comment	Condition
MAC-CellGroupConfig ::= SEQUENCE {			
schedulingRequestID-BFR-r17	Not present		
schedulingRequestID-BFR2-r17	Not present		
schedulingRequestConfig-v1700	SchedulingRequest-Config		
}			

Table 7.5.5.7.4.3-3: *SchedulingRequestResourceConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-157			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequestResourceConfig ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
sl40	4		
}			
}			

7.5.5.9.5 Test requirements

Tables 7.5.5.9.4.1-3 and 7.5.5.9.5-1 define the primary level settings including test tolerances for SA FR2 SCell for beam failure detection and link recovery testing in DRX.

Table 7.5.5.9.5.1-3: Cell specific test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Cell1	Cell2				
		T1 to T5	T1	T2	T3	T4	T5
AoA setup		Setup 3 as specified in clause A.9.1					
Assumption for UE beams Note 10		Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						
EPRE ratio of PDSCH to PDSCH DMRS	dB						
EPRE ratio of OCNG DMRS to SSS	dB						
EPRE ratio of OCNG to OCNG DMRS	dB						
SNR_CSI-RS of set $q_{0,0}$	dB	13.7	13.7	5.7	-12	-12	-12
SNR_CSI-RS of set $q_{0,1}$	dB	13.7	13.7	13.7	13.7	13.7	13.7
SNR_CSI-RS of set $q_{1,0}$	dB	0.2	0.2	0.2	20	20	20
CSI-RS_RP of set $q_{0,1}$	dBm/ SCS kHz	-104.5	-104.5	-104.5	-84.7	-84.7	-847
N_{oc}	dBm/120 kHz	-104.7	-104.7				
Propagation condition		TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.7.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause TS38.133 A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: AoA1 for PCell and TRP1 of SCell , AoA2 for TRP2 of SCell

The UE behaviour during time durations T1, T2, T3, T4 and T5 in A.7.5.5.9.1 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1 for TRP0 and TRP1.

During the period from time point A to time point B the UE shall transmit uplink signal in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3, T4, T5, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1 for TRP0.

During T3 the UE shall detect beam failure and initiate link recovery for TRP0. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$.

No later than time point F occurring no later than D1 = [520]+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{0,1}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

7.5.5.10 NR SA FR2 PCell TRP specific SSB-based Beam Failure Detection and Link Recovery in non-DRX

Editor's Note:

- This test case is incomplete for Test frequency f > 40.8 GHz
- This test case is incomplete for UE power class other than PC3.
- TS 38.522 applicability spec update is pending

7.5.5.10.1 Test purpose

The purpose of this test is to verify that the UE properly detects TRP specific SSB-based beam failure and link recovery in the sets $\bar{q}_{0,0}$ and $\bar{q}_{1,0}$ for TRP0 with *schedulingRequestID-BFR-r17* configured, when no DRX is used for an FR2 serving cell requirements in TS38.133[6] clause 8.18.

7.5.5.10.2 Test applicability

This test applies to all types of NR UE release 17 onwards supporting TRP specific PCell BFR.

7.5.5.10.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.5.0.2 and 7.5.5.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.5.10.

7.5.5.10.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 7.5.5.10.4-1 shows the variation of the downlink SNR of the SSB in set $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ for TRP0 and TRP1 respectively. Figure 7.5.5.10.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set $\bar{q}_{1,0}$ for TPR0.

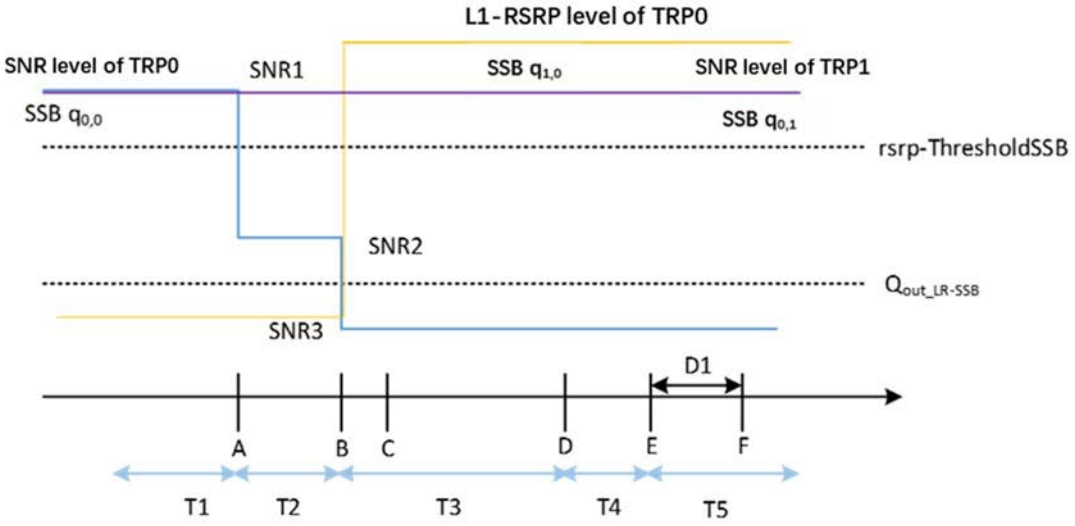

Figure 7.5.5.10.4-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

7.5.5.10.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.5.10.4.1-1.

Table 7.5.5.10.4-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Configure the test equipment and the DUT according to the parameters in Table 7.5.5.10.4.1-2.

Table 7.5.5.10.4.1-2: Initial conditions for SA FR2 beam failure detection and link recovery testing in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.5.10.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.5.10.4.1-3.
2. Message contents are defined in clause 7.5.5.10.4.3.
3. There are two NR cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.5.10.4.1-3: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	Same configuration for both TRP wherever applicable
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Duplex mode	Config 1,2		TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	
BW channel	Config 1,2		100: $N_{RB,c}$ = 66	
Data RBs allocated	Config 1,2		66	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	120	
DL initial BWP configuration	Config 1,2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1	
UL initial BWP configuration	Config 1,2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1	
PDSCH Reference Channel	Config 1		SR.3.2 TDD	
	Config 2		SR.3.3 TDD	
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	
	Config 2		CR.3.2 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD	
	Config 2		CCR.3.7 TDD	
OCNG parameters	Config 1,2		OP.1	
CP length	Config 1,2		Normal	
PDSCH/PDCCH TCI state	Config 1,2		TCI.State.0	
CSI-RS for tracking	Config 1,2		TRS.2.1 TDD	
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.3.1 TDD	
reportConfigType	Config 1,2		periodic	
reportQuantity	Config 1,2		cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2	slot	40	
CSI reporting offset	Config 1,2	slot	4	
SSB Configuration for TRP0	Config 1		SSB.1 FR2	
	Config 2		SSB.2 FR2	
SSB Configuration for TRP1	Config 1		SSB.9 FR2	
	Config 2		SSB.10 FR2	
SMTC Configuration	Config 1,2		SMTC.3	
PRACH Configuration	Config 1,2		FR2 PRACH configuration 2	
DRX configuration	Config 1,2		OFF	
SSB Index assigned as BFD RS (q0,0)	Config 1,2		0	
SSB Index assigned as CBD RS (q1,0)	Config 1,2		1	
SSB Index assigned as BFD RS (q0,1)	Config 1,2		2	
SSB Index assigned as CBD RS (q1,1)	Config 1,2		3	
SSB Index assigned as RLM RS	Config 1,2		0,1,2,3	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
Gap pattern ID			gp0	
gapOffset			0	
schedulingRequestID-BFR- r17			Configured	
Periodicity of PUCCH for SR configuration for BFR on PCell		slot	40	5ms
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB	Config 1	dBm/SCS	-109	Threshold used for $Q_{in_LR_SSB}$
	Config 2		-106	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], clause 5.17
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	2.61	
T3		s	1.64	
T4		s	0	
T5		s	1.01	
D1		s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

7.5.5.10.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.5.10.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

3. When T1 expires the SS shall change the SNR1 and SNR2 values to T2 as specified in Table 7.5.5.10.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR1 and SNR2 values to T3 as specified in Table 7.5.5.10.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR1 and SNR2 values to T4 as specified in Table 7.5.5.10.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR1 and SNR2 values to T5 as specified in Table 7.5.5.10.5-1. T5 starts.

7. If the SS:

a) detects uplink power on NR carrier in each slot configured for CQI transmission (according CQI reporting on PUCCH) during the period from time point A to time point B; and

b) does not detect a preamble on a beam associated with candidate beam set q_{10}before time point B; and

c) detects preamble on a beam associated with candidate beam set q_{10}before time point F (D1 after the start of T5),

the number of successful tests is increased by one. Otherwise the number of failed tests is increased by one.

8. When T5 expires the SS shall change the SNR value to T1 as specified in Table 7.5.5.10.5-1.
9. Wait 1s for the UE to re-establish the connection or continue directly to step 10. If the UE re-establishes the connection within 1s continue to step 11. Otherwise continue to step 10.
10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
11. Repeat steps 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.5.10.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.5.10.4.3-1: Common Exception messages for NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8A with Condition CSI-RS BFD Table H.3.1-10 with Condition CSI-RS Table H.3.1-10A Table H.3.7-1 with Condition TRP-SPECIFIC-BFD

Table 7.5.5.10.4.3-2: *MAC-CellGroupConfig for R17 BFR*

Derivation Path: TS 38.508-1, Table 4.6.3-68			
Information Element	Value/remark	Comment	Condition
MAC-CellGroupConfig ::= SEQUENCE {			
schedulingRequestID-BFR-r17	Not present		
schedulingRequestID-BFR2-r17	Not present		
schedulingRequestConfig-v1700	SchedulingRequest-Config		
}			

7.5.5.10.5 Test requirement

Tables 7.5.5.10.4.1-3 and 7.5.5.10.5-1 define the primary level settings including test tolerances for TRP specific NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX.

Table7.5.5.10.5-1: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 3 as specified in clause A.9.1 Note 12				
Assumption for UE beams Note 10		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					

EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set $q_{0,0}$	Config 1-2	dB	13.7 Note 11	5.5 Note 11	-12	-12	-12
SNR_SSB of set $q_{0,1}$	Config 1-2	dB	13.7 Note 11	13.7 Note 11	13.7 Note 11	13.7 Note 11	13.7 Note 11
SNR_SSB of set $q_{1,0}$	Config 1-2	dB	0.2	0.2	20	20	20
SSB_RP of set $q_{1,0}$	Config 1	dBm/ SCS	-104.5	-104.5	-84.7	-84.7	-84.7
	Config 2		-101.5	-101.5	-81.7	-81.7	-81.7
N_{oc}	Config 1,2	dBm/120 KHz	-104.7+TT				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.1.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband
Note 12: AoA1 for TRP1 and AoA2 for TRP2

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1 for TRP 0 and TRP1.

During the period from time point A to time point B the UE shall transmit uplink signal for TRP0 and TRP1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3, T4, T5, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission for TRP 1.

During T3 the UE shall detect beam failure and initiate link recovery for TRP 0. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$.

No later than time point F occurring no later than D1 = 960+10 ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{0,1}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{0,1}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

7.5.6 Active BWP switch delay

7.5.6.1 DCI-based and time-based active BWP switch

7.5.6.1.0 Minimum conformance requirements

[TS 38.133, clause 8.6.2]

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after the beginning of DL slot n+ $T_{BWPswitchDelay}$.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 7.5.6.1.0-1.

Table 7.5.6.1.0-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5
2	0.25	3	9
3	0.125	6	18
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP.

7.5.6.1.1 NR SA FR2 DCI-based DL active BWP switch in non-DRX

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Test tolerance analysis is missing

- Message contents are TBD

- Cell mapping is TBD

- Test procedure is TBD

- Test applicability needs to be added to TS 38.522

7.5.6.1.1.1 Test purpose

FFS

7.5.6.1.1.2 Test applicability

FFS

7.5.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.6.1.1.

7.5.6.1.1.4 Test description

7.5.6.1.1.4.1 Initial conditions

FFS

7.5.6.1.1.4.2 Test procedure

FFS

7.5.6.1.1.4.3 Message contents

FFS

7.5.6.1.1.5 Test requirements

FFS

7.5.6.1.2 NR SA FR1-FR2 DCI-based DL active BWP switch in non-DRX

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Test tolerance analysis is missing

- Message contents are TBD

- Cell mapping is TBD

- Test procedure is TBD

- Test applicability needs to be added to TS 38.522

- NR FR1 - FR2 OTA testability is still FFS.

7.5.6.1.2.1 Test purpose

FFS

7.5.6.1.2.2 Test applicability

FFS

7.5.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.6.1.2.

7.5.6.1.2.4 Test description

7.5.6.1.2.4.1 Initial conditions

FFS

7.5.6.1.2.4.2 Test procedure

FFS

7.5.6.1.2.4.3 Message contents

FFS

7.5.6.1.2.5 Test requirements

FFS

7.5.6.1.3 NR SA FR2 DCI-based DL active BWP switch in non-DRX

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Test tolerance analysis is missing

- Message contents are TBD

- Cell mapping is TBD

- Test procedure is TBD

- Test applicability needs to be added to TS 38.522

7.5.6.1.3.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS 38.133 [6] clause 8.6

7.5.6.1.3.2 Test applicability

This test applies to all types of NR UE release 15 onwards.

7.5.6.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.6.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.6.1.3.

7.5.6.1.3.4 Test description

There is one cell configured in this test. Cell 1 is PCell. This test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

7.5.6.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.6.1.3.4.1-1.

Table 7.5.6.1.3.4.1-1: Supported test configurations for NR SA FR2 DCI-based DL active BWP switch in non-DRX

Config	Description
7.5.6.1.3-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: A UE which fulfils the requirements in test case 7.5.6.1.1 or 7.5.6.1.2 can skip the test cases in 7.5.6.1.3.	

Configure the test equipment and the DUT according to the parameters in Table 7.5.6.1.3.4.1-2.

Table 7.5.6.1.3.4.1-2: Initial conditions for NR SA FR2 DCI-based DL active BWP switch in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 5.5.5.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.TBD	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.6.1.3.4.1-3.

2. Message contents are defined in clause 7.5.6.1.3.4.3.

3. There are one NR cell specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.5.6.1.3.4.1-3: General test parameters for NR SA FR2 DCI-based DL active BWP switch in non-DRX

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
bwp-InactivityTimer	ms	[200]	
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

7.5.6.1.3.4.2 Test procedure

FFS

7.5.6.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.6.1.3.4.3-1: Common Exception messages for NR SA FR2 DCI-based DL active BWP switch in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	FFS

7.5.6.1.3.5 Test requirements

FFS

7.5.6.2 RRC-based active BWP switch

7.5.6.2.0 Minimum conformance requirements

FFS

7.5.6.2.1 NR SA FR2 RRC-based DL active BWP switch in non-DRX

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Message contents are TBD

- Cell mapping is TBD

- Test procedure is TBD

- Test applicability needs to be added to TS 38.522

7.5.6.2.1.1 Test purpose

FFS

7.5.6.2.1.2 Test applicability

FFS

7.5.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.6.2.1.

7.5.6.2.1.4 Test description

7.5.6.2.1.4.1 Initial conditions

FFS

7.5.6.2.1.4.2 Test procedure

FFS

7.5.6.2.1.4.3 Message contents

FFS

7.5.6.2.1.5 Test requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs right after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k_1$.

Where, k_1 is the timing between DL data receiving and acknowledgement as specified in [12].

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

Table 7.5.6.2.1.5-1: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Active BWP ID		1
Active DL BWP-1 Configuration		DLBWP.0.2
Active DL BWP-2 Configuration		DLBWP.1.1
Active UL BWP-1 Configuration		ULBWP.1.3
Active UL BWP-2 Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State		TCI.State.0
TRS Configuration		TRS.2.1 TDD
Antenna Configuration		1x2
Propagation Condition		AWGN
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		

Parameter	Unit	Cell 1
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

Table 7.5.6.2.1.5-2: OTA related test parameters for BWP switching test case

Parameter		Unit	Cell 2
Angle of arrival configuration			According to table A.9
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note3	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s / I_{ot}$		dB	18
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone			

7.5.6.3 Simultaneous DCI-based and timer-based active BWP switch on multiple CCs

7.5.6.3.0 Minimum conformance requirements

7.5.6.3.0.1 Minimum conformance requirements for active BWP switch on multiple SCells with non-DRX in SA

7.5.6.3.0.1.1 Simultaneous DCI based BWP switch delay on multiple CCs

[TS 38.133, Clause 8.6.2A.1]

The delay requirements for simultaneous DCI based BWP switch on multiple CCs in this clause apply only if the timing difference among the first symbol of slot carrying DCI for all CCs is received within the MRTD for inter-band CA as defined in clause 7.6.4 in TS 38.133 [6].

For DCI-based BWP switch on multiple CCs, after the UE receives BWP switching request, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n, where slot n is slot which UE receives the earliest BWP switching request among CCs on which UE is performing simultaneous DCI-based BWP switching.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths on any serving cell.

UE shall finish BWP switch within the time duration $T_{MultipleBWPswitchDelay} + Y$, which is defined as:

$$T_{MultipleBWPswitchDelay} = T_{BWPswitchDelay} + D*(N-1)$$

Where:

- $T_{BWPswitchDelay}$ is the BWP switching delay on single CC defined in Table 8.6.2-1 depending on UE capability *bwp-SwitchingDelay* in TS 38.331 [13]. $T_{BWPswitchDelay}$ shall be based on the smallest SCS among SCS of all involved CCs before and after BWP switch. If the BWP switch on multiple CCs results in the change of the SCS on any CC among involved CCs, $T_{BWPswitchDelay}$ shall be based on the smallest SCS among all SCS values of all involved CCs.

- D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability *bwp-SwitchingMultiCCs-r16* in TS 38.306 [11] for switching between non-dormant BWPs, and *bwp-SwitchingMultiDormancyCCs-r16* for switching between non-dormant and dormant BWPs.

- For UE which is capable of per-FR gap, and no BWP switch involves SCS change, N is the number of CCs in same FR; For UE which is not capable of per-FR gap, or the BWP switches on any CC involves SCS changing, N is the number of CCs undergoing simultaneous BWP switch.

- Y=0, if the serving cell where UE receives DCI for BWP switch is same as the serving cell on which BWP switch occurs for each involved serving cell.

  Y equals to the length of one slot at smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change,

- if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. If both scheduling cell and scheduled cell are in FR2-2, Y shall follow the SCS of 120 KHz.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

If the BWP switch is triggered on multiple CCs simultaneously within or outside DRX active time, and one of the two BWPs on each CC in a BWP switching is a dormant BWP [TS 38.321, 12], UE shall be able to complete active BWP switching within the time duration of

- $T_{DormantMultipleBWPswitchDelay} = T_{MultipleBWPswitchDelay}+X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, or

- $T_{DormantMultipleBWPswitchDelay} = T_{MultipleBWPswitchDelay} +X+Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where

- $T_{MultipleBWPswitchDelay}$ is defined above corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.

- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs. If both scheduling cell and scheduled cell are in FR2-2, X shall follow the SCS of 120 KHz.

- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where DCI for dormancy indication is received.

The number of CCs, N, on which the UE can simultaneously switch BWPs while still meeting the requirements, if any, related to allocations on downlink, uplink, or transmission of HARQ-ACK, depends on the UE reported capabilities related to BWP switching, the network configuration and the BWP switch method.

7.5.6.3.0.1.2 Simultaneous timer-based BWP switch delay on multiple CCs

[TS 38.133, Clause 8.6.2B.1]

The delay requirements for simultaneous timer-based BWP switch on multiple CCs in this clause apply only if the timing difference among the beginning of the slot where timer-based BWP switching starts for all CCs is within the MRTD for inter-band CA as defined in clause 7.6.4 in TS 38.133 [6].

For timer-based BWP switch on multiple CCs, UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (in FR1) or DL half-subframe (in FR2) immediately after the earliest BWP-inactivity timer *bwp-InactivityTimer* defined in TS 38.331[13] expiration occurs on multiple serving cells, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{MultipleBWPswitchDelay}$ which starts from the beginning of DL slot n, where $T_{MultipleBWPswitchDelay}$ is defined in 7.5.6.3.0.1.1.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{MultipleBWPswitchDelay}$ after *bwp-InactivityTimer* (TS 38.331 [13]) expires on the cell where timer-based BWP switch occurs.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in TS 38.133 [6] in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

7.5.6.3.0.1.3 Interruptions due to active BWP switching requirement

[TS 38.133, Clause 8.2.2.2.5]

The requirements for DCI-based BWP switch, timer-based BWP switch or UL BWP switch triggered by consistent uplink CCA failures in this clause apply to the case that the BWP switch is performed on a single CC or multiple CCs.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this clause

apply for each BWP switch. Further, the requirements in this clause are applicable to UE capable of independent beam management in FR2 inter-band CA and UE capable of FR2 intra-band CA and FR1.

When UE receives a DCI indicating UE to switch its active BWP involving changes in any of the parameters listed in Table 7.5.6.3.0.1.3-2, the UE is allowed to cause interruption of up to X slot to other active serving cells if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 7.5.6.3.0.1.3-2 and the UE is capable of per-FR gap the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 7.5.6.3.0.1.3-1. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2 in TS 38.133 [6] when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ +Y as defined in clause 7.5.6.3.0.1.1 when BWP switch occurs on multiple CCs. Interruptions are not allowed during BWP switch involving any other parameter change.

When a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [13] expires, UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 7.5.6.3.0.1.3-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 7.5.6.3.0.1.3-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 7.5.6.3.0.1.3-1. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2 in TS 38.133 [6] when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ as defined in clause 8.6.2B.1 in TS 38.133 [6] when BWP switch occurs on multiple CCs simultaneously or $T_{MultipleBWPswitchDelayTotal}$ as defined in clause 8.6.2B.2 in TS 38.133 [6] when BWP switch occurs on multiple CCs over partially overlapping time period. Interruptions are not allowed during BWP switch involving any other parameter change.

When UE receives an RRC reconfiguration that only requests UE to switch its active BWP on one single CC, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 7.5.6.3.0.1.3-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 7.5.6.3.0.1.3-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 7.5.6.3.0.1.3-1. The interruption is only allowed within the delay $T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$ defined in clause 8.6.3 in TS 38.133 [6] when BWP switch occurs on a single CC. The interruption is only allowed within the delay $T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$ + D_{RRC}*(N-1) as defined in clause 8.6.3A in TS 38.133 [6] when BWP switch occurs on multiple CCs.

When UL BWP switch is triggered by consistent uplink CCA failures (TS 38.321 [12]), UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active UL BWP involving changes in any of the parameters listed in Table 7.5.6.3.0.1.3-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the UL BWP switch imposes changes in any of the parameters listed in Table 7.5.6.3.0.1.3-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing UL BWP switching. X is defined in Table 7.5.6.3.0.1.3-1. The starting time of interruption is only allowed within the UL BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2 in TS 38.133 [6]. Interruptions are not allowed during BWP switch involving other parameter change.

Table 7.5.6.3.0.1.3-1: Interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5
5	0.03125	17
6	0.015625	33
Note1: void		

Table 7.5.6.3.0.1.3-2: Parameters which cause interruption other than SCS

Parameters	Comment
locationAndBandwidth	From TS 38.331 [13]
nrofSRS-Ports	
maxMIMO-Layers-r16	

7.5.6.3.1 Active BWP switch on multiple SCells with non-DRX in SA

Editor's Note: This test case is incomplete in following aspects:

- Test procedure is missing
- Message contents are missing
- TT analysis is missing

7.5.6.3.1.1 Test purpose

The purpose of this test is to verify fulfillment of DL BWP switch delay requirement defined in clauses 8.6.2A.1 and 8.6.2B.1, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5 in TS 38.133 [6].

7.5.6.3.1.2 Test applicability

This test applies to all types of NR SA UE Rel-16 and forward supporting bwp-SwitchingMultiCCs-r16, either type1-r16 or type2-r16, as well as the corresponding r15 BWP switch capabilities from legacy tests (support of at least 2 active BWPs).7.5.6.3.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.5.6.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.6.3.1.

7.5.6.3.1.4 Test description

The supported test configurations are shown in Table 7.5.6.3.1.4.1-1 below. The test scenario comprises one PCell (Cell 1) and two SCells (Cell 2 and Cell 3) as given in Table 7.5.6.3.1.4.1-3. NR cell-specific parameters are provided in Table 7.5.6.3.1.5-1, and OTA related test parameters in Table 7.5.6.3.1.5-2.

The test consists of three consecutive time periods with durations T1, T2 and T3, respectively.

PDCCHs indicating new transmissions shall be transmitted in PCell, SCell1 and SCell2 throughout time periods T1 and T3 to ensure that UE sends ACK/NACKs for PDSCH reception in PCell, SCell1 and SCell2. During T2, there shall be scheduling on PDSCH in PCell only.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (SCell1) on radio channel 2 (SCC1), and Cell 3 (SCell2) on radio channel 3 (SCC2).

UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for Cell 1 (PCell). BWP-0 includes the bandwidth of the initial DL BWP and SSB.

UE is configured with two different UE-specific downlink bandwidth parts, BWP-1 and BWP-2, for Cell 2 (SCell1). BWP-1 and BWP-2 include the bandwidth of the initial DL BWP and SSB.

UE is configured with two different UE-specific downlink bandwidth parts, BWP-3 and BWP-4, for Cell 3 (SCell2). BWP-3 and BWP-4 include the bandwidth of the initial DL BWP and SSB.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell1.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-3 in SCell2.

UE is configured with a *bwp-InactivityTimer* timer value for SCell1 and SCell2, respectively.

All cells have constant signal levels throughout the test.

Time period T1 starts when the UE simultaneously receives DCI format 1_1 commands for DL BWP switch in SCell1 and SCell2, respectively, in a slot # denoted *m*. The UE shall switch its SCell1 bandwidth part from BWP-1 to BWP-2, and its SCell2 bandwidth part from BWP-3 to BWP-4. The UE shall be able to receive PDSCH in SCell1 and SCell2 starting from the first DL slot that occurs after slot ($m+T_{MultipleBWPswitchDelay}$) as defined in clause 7.5.6.3.0.1.1, and to transmit ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after ($m+T_{BWPswitchDelay}+k1$) where *k1* is specified in TS 38.321 [12]. The UE shall be continuously scheduled in SCell1 BWP-2 and SCell2 BWP-4 no later than in the first DL slot that occurs after slot ($m+T_{MultipleBWPswitchDelay}$). The starting time of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall occur within the BWP switching delay. The length of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall fulfill requirements in clause 7.5.6.3.0.1.3.

Time period T2 starts when the test equipment ceases to schedule the UE on PDSCH in SCell1 and SCell2, thereby causing the *bwp-InactivityTimer* timers for SCell1 and SCell2 to be running until expiry.

Time period T3 starts at the beginning of the first DL half-subframe immediately after the earliest of the *bwp-InactivityTimer* timers expires, in a slot # denoted *n*. The UE shall switch its SCell1 bandwidth part from BWP-2 to BWP-1, and its SCell2 bandwidth part from BWP-4 to BWP-3. The UE shall be able to receive PDSCH in SCell1 and SCell2 starting from the first DL slot that occurs after slot ($n+T_{MultipleBWPswitchDelay}$) as defined in clause 7.5.6.3.0.1.2, and to transmit ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after slot ($n+T_{MultipleBWPswitchDelay}+k1$). The UE shall be continuously scheduled in SCell1 BWP-1 and SCell2 BWP-3 no later than in the first DL slot that occurs after slot ($n+T_{MultipleBWPswitchDelay}$). The starting time of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall occur within the BWP switching delay. The length of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall fulfill requirements in clause 7.5.6.3.0.1.3.

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch commands are received or *bwp-InactivityTimer* timers expire until ACK/NACKs are sent in SCell1 and SCell2, respectively.

The test equipment verifies that potential interruptions of PCell due to DL BWP switching on SCell1 and SCell2 are carried out within the correct time span, and are within the correct length, by monitoring ACK/NACKs sent in PCell for PCell.

7.5.6.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.6.3.1.4.1-1.

Table 7.5.6.3.1.4.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD -TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.6.3.1.4.1-2.

Table 7.5.6.3.1.4.1-2: Initial conditions for FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.6.3.1.4.1-3. Cell-specific parameters of NR PCell are specified in Table 7.5.6.3.1.5-1.

2. Message contents are defined in clause 7.5.6.3.1.4.3.

3. There are two NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 7.5.6.3.1.4.1-3: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2, 3	Three NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell1		Cell 2	SCell1 on RF channel number 2.
Active SCell2		Cell 3	SCell2 on RF channel number 3.
CP length		Normal	
DRX		OFF	
sCellDeactivationTimer	ms	---	Same value applies for SCell1 and SCell2. The value infinity is applied.
bwp-InactivityTimer	ms	200	Same value applies for SCell1 and SCell2.
Cell2 timing offset to Cell1	µs	0	Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.
Cell3 timing offset to Cell1	µs	0	
T1	s	0.2	During T1, DCI-based simultaneous BWP switching of SCell1 and SCell2 is carried out.
T2	s	0.2	During T2 bwp-InactivityTimer timers shall run to expiry.
T3	s	0.2	During T3, timer-based simultaneous BWP switching of SCell1 and SCell2 is carried out.

7.5.6.3.1.4.2 Test procedure

TBD

7.5.6.3.1.4.3 Message contents

TBD

7.5.6.3.1.5 Test requirement

Table 7.5.6.3.1.5-1 defines the NR cell specific test parameters. Table 7.5.6.3.1.5-2 defines OTA related test parameters, not including test tolerances yet [will update after TT analysis].

7.5.6.3.1.5-1: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Cell 1	Cell 2	Cell 3
Frequency Range		FR2		
NR RF channel		1	2	3
Duplex mode		TDD		
TDD configuration		TDDConf.3.1		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		
Active Downlink BWP ID		0	1, 2	3, 4
Downlink initial BWP Configuration		DLBWP.0.2	DLBWP.0.2	DLBWP.0.2
Uplink initial BWP Configuration		ULBWP.0.2	ULBWP.0.2	ULBWP.0.2
Downlink active BWP-0 Configuration		DLBWP.1.1	---	---
Downlink active BWP-1 Configuration		---	DLBWP.1.1	---
Downlink active BWP-2 Configuration		---	DLBWP.1.3	---
Downlink active BWP-3 Configuration		---	---	DLBWP.1.1
Downlink active BWP-4 Configuration		---	---	DLBWP.1.3
Uplink active BWP-0 Configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1

PDSCH Reference measurement channel		SR.3.1 TDD		
TRS configuration		TRS.2.1 TDD		
TCI state		TCI.State.0		
RMSI CORESET parameters		CR.3.1 TDD		
Dedicated CORESET parameters		CCR.3.1 TDD		
OCNG Patterns		OP.1		
SSB Configuration		SSB.3 FR2		
SMTC Configuration		SMTC.1		
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
Propagation Condition		AWGN	AWGN	AWGN
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
Note 1: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table 7.5.6.3.1.5-2: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 1	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1 in TS 38.133 [6]		
Assumtion for UE beams Note4		Fine	Fine	Fine
Noc Note1	dBm/15kHz	-111.7 + TT	-111.7 + TT	-111.7 + TT
Noc Note1	dBm/SCS	-102.7 + TT	-102.7 + TT	-102.7 + TT
Ês/Noc	dB	7 + TT	7 + TT	7 + TT
SSB-RP Note2	dBm/SCS	-95.7 + TT	-95.7 + TT	-95.7 + TT
Ês/Iot	dB	7 + TT	7 + TT	7 + TT
Io Note3	dBm/95.04 MHz	-65.9 + TT	-65.9 + TT	-65.9 + TT
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: SSB-RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 4: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6] and does not limit UE implementation or test system implementation.				

During T1, the UE shall start to send ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after the beginning of DL slot ($m+T_{MultipleBWPswitchDelay}+k1$).

During T3, the UE shall start to send ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after the beginning of DL slot ($n+T_{MultipleBWPswitchDelay}+k1$).

During T1 and T3, the start of any interruption on PCell due to active BWP switching on SCell1 and SCell2 shall not happen outside the BWP switching delay $T_{MultipleBWPswitchDelay}$, and the length of any interruption shall not exceed the length specified in clause 7.5.6.3.0.1.3.

All of the above test requirements shall be fulfilled in order for the observed active BWP switch delays in SCell1 and SCell2 to be considered correct.

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs

7.5.6.5.0 Minimum conformance requirements

7.5.6.5.0.1 Minimum conformance requirements for active BWP switch on multiple SCells with non-DRX in SA

[TS38.133, Clause 8.6.3A]

The requirements in this clause only apply to the case when the same type of BWP switch (RRC based BWP switch) is performed on multiple CCs simultaneously or over partially overlapping time period.

The requirements in this clause shall apply:

- Active BWP switching or parameter change of its active BWPs for SpCell

- Parameter change of its active BWPs except parameter *firstActiveDownlinkBWP-Id* and *firstActiveUplinkBWP-Id* for SCells

Requirements in this clause apply only if RRC based BWP switching on multiple CCs for NR-CA is triggered by a single RRC command.

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWPs, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessing\,Delay}+T_{BWPswitchDelayRRC}+D_{RRC}*(N-1)}{NR\,slot\,length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in Clause 8.6.3 in TS 38.133 [6], and

$D_{RRC} = 0$ for UE which is capable of type 1 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [TS 38.331, 13]. $D_{RRC} = D$ for UE which is capable of type 2 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [TS 38.331, 13], where D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability [TS 38.306, 11].

N is the number of CCs within the NR-CA configured for performing simultaneous BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC} * (N-1)$ on the cells where RRC-based BWP switch occurs.

7.5.6.5.1 Active BWP switch on multiple SCells with non-DRX in SA

Editor's note: This test case is incomplete in following aspects:

- TT analysis is missing

- Message contents need more work

7.5.6.5.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement for simultaneous RRC-based BWP switch on multiple CCs defined in clause 8.6.3A in 38.133 [6].

7.5.6.5.1.2 Test applicability

This test applies to all types of NR SA UE Rel-16 and forward supporting bwp-SwitchingMultiCCs-r16, either type1-r16 or type2-r16, as well as the corresponding r15 BWP switch capabilities from legacy tests (support of at least 2 active BWPs).

7.5.6.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.6.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.6.5.1.

7.5.6.5.1.4 Test description

7.5.6.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. Supported test configurations for NR PCell and SCell are shown in Table 7.5.6.5.1.4.1-1.

Table 7.5.6.5.1.4.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD -TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.6.5.1.4.1-2.

Table 7.5.6.5.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.6.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.6.5.1.4.1-3.
2. Message contents are defined in clause 7.5.6.5.1.4.3.
3. The test scenario comprises of one NR PCell (Cell 1) and one NR SCell (Cell 2). The power levels and settings for Cell 1 and Cell 2 are configured according to clause C.1.2 and C.1.3.
4. By step 4 of the test procedure:
   - UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (SCell) on radio channel 2 (SCC).
   - UE has dedicated bandwidth part BWP-1 in its RRC configuration for PCell (Cell 1) and SCell (Cell 2)
   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell (Cell 1) and SCell (Cell 2).

Table 7.5.6.5.1.4.1-3: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2, 3	Three NR radio channels are used for this test

Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell2 timing offset to Cell1	µs	0	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	During T1, RRC-based simultaneous BWP switching of PCell and SCell is carried out.

7.5.6.5.1.4.2 Test procedure

The test consists of 1 time period with duration of T1. All cells have constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. NR Cell 3 is added as the SCell and activated.

2. Set the parameters according to Tables 7.5.6.5.1.4.1-3, Table 7.5.6.5.1.5-1 and Table 7.5.6.5.1.5-2. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall send an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP* on NR Cell 1 and NR Cell 2. This message also configures another UE-specific bandwidth part, BWP-1, and indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to the initial condition of Active BWP-1 in Table 7.5.6.5.1.5-1 and Table 7.5.6.5.1.5-2 for NR Cell 1 and NR Cell 2.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and SCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

6. The SS shall send an *RRCConnectionReconfiguration* message with updated bandwidth part configuration for PCell and SCell DL BWP switch, changing the BWP according to the final condition of Active BWP-1 in Table 7.5.6.5.1.5-1 and Table 7.5.6.5.1.5-2.

7. T1 starts from the end of the slot (denote as slot #i) in which the UE receives the RRC message reconfiguring PCell and SCell BWP, then it reconfigures its bandwidth part with the updated bandwidth part configuration.

   If the SS observes that,

   a) the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{\text{NR slot length}} + k_1)$; and

   b) the UE starts to report valid ACK/NACK for SCell from the first UL slot that occurs after the beginning of the DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{\text{NR slot length}} + k_1)$,

   then count a success for the test, otherwise count a fail for the test.

8. After the SS receives the ACK/NACK in step 7) or when T1 expires, the SS shall transmit *RRCConnectionReconfiguration* message. The UE shall transmit *RRCConnectionReconfigurationComplete* message.

9. The SS shall transmit *RRCConnectionReconfiguration* message to add NR cell (SCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 8 or step 9 fails, switch off and on the UE and go to step 1.

10. Repeat steps 3-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.6.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.6.5.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1

Table 7.5.6.5.1.4.3-2: *RRCReconfiguration* (Test procedure, step 3 and step 6)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 7.5.6.5.1.4.3-3	
}			
}			
}			

Table 7.5.6.5.1.4.3-3: *CellGroupConfig* (Table 7.5.6.5.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
spCellConfigDedicated	ServingCellConfig	Table 7.5.6.5.1.4.3-4	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		Entry 1	
sCellIndex	ServCellIndex of NR SCell		
sCellConfigDedicated	ServingCellConfig	Table 7.5.6.5.1.4.3-4	
}			
}			
}			

Table 7.5.6.5.1.4.3-4: *ServingCellConfig* (Table 7.5.6.5.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	1 entry		

BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 7.5.6.5.1.4.3-5	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	1 entry		
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 7.5.6.5.1.4.3-6	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 7.5.6.5.1.4.3-5: *BWP-Downlink* (Table 7.5.6.5.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 6
}			
}			

Table 7.5.6.5.1.4.3-6: BWP-Uplink (Table 7.5.6.5.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 6
}			
}			

7.5.6.5.1.5 Test requirements

Tables 7.5.6.5.1.4.1-3, 7.5.6.5.1.5-1 and 7.5.6.5.1.5-2 define the primary level settings including test tolerances.

Table 7.5.6.5.1.5-1: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Cell 1	Cell 2

Frequency Range			FR2	
NR RF channel			1	2
Duplex mode			TDD	
TDD configuration			TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
Active Downlink BWP ID			0	1
Downlink initial BWP Configuration			DLBWP.0.2	DLBWP.0.2
Uplink initial BWP Configuration			ULBWP.0.2	ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3	DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3	ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1	DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1	ULBWP.1.1
PDSCH Reference measurement channel			SR.3.1 TDD	
TRS configuration			TRS.2.1 TDD	
TCI state			TCI.State.0	
RMSI CORESET parameters			CR.3.1 TDD	
Dedicated CORESET parameters			CCR.3.1 TDD	
OCNG Patterns			OP.1	
SSB Configuration			SSB.3 FR2	
SMTC Configuration			SMTC.1	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
Propagation Condition			AWGN	AWGN
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low

Note 1: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table 7.5.6.5.1.5-2: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1	
Assumtion for UE beams Note4		Fine	Fine
Noc Note1	dBm/15kHz	[-111.7]	-111.7
Noc Note1	dBm/SCS	[-102.7]	-102.7
Ês/Noc	dB	[7]	7
SSB-RP Note2	dBm/SCS	[-85]	-85

Ês/Iot	dB	[18]	18
Io[Note3]	dBm/95.04 MHz	[-56]	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB-RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 4: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.			

During T1, the UE shall be ready for the reception of uplink grant for PCell and SCell in the beginning of the DL slot right after slot ($i+\frac{T_{RRC processing Delay}+T_{BWP switch Delay RRC}+D_{RRC}}{NR\ slot\ length}$).

All of the above test requirements shall be fulfilled in order for the observed PCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.7 PSCell addition and release delay

7.5.7.0 Minimum conformance requirements

7.5.7.0.1 Minimum conformance requirements for PSCell addition delay

Upon receiving PSCell addition in subframe *n*, the UE shall be capable to transmit PRACH preamble towards PSCell in FR2 no later than in subframe $n + T_{config_PSCell}$:

Where:

$T_{config_PSCell} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{PSCell_DU} + 2$ ms

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [13].

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period. $T_{processing}$ = 40 ms.

T_{search} is the time for AGC settling and PSS/SSS detection. If the target cell is known, T_{search} = 0 ms. If the target cell is unknown and the target cell Ês/Iot ≥ -2dB, T_{search} = 24* Trs ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = 1*Trs ms for a known or unknown PSCell.

T_{PSCell_DU} is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{PSCell_DU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [8].

Trs is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

In FR1 and FR2, the PSCell is known if it has been meeting the following conditions:

During the last 5 seconds before the reception of the PSCell configuration command:

- the UE has sent a valid measurement report for the PSCell being configured and
- One of the SSBs measured from the PSCell being configured remains detectable according to the cell identification conditions specified in TS 38.133 [6] clause 9.3.

- One of the SSBs measured from PSCell being configured also remains detectable during the PSCell configuration delay T_{config_PSCell} according to the cell identification conditions specified in TS 38.133 [6] clause 9.3.

otherwise it is unknown.

The PCell interruption specified in TS 38.133 [6] clause 8.2 is allowed only during the RRC reconfiguration procedure in TS 38.331 [13].

The normative reference for this requirement is TS 38.133 [6] clause 8.9.2.

7.5.7.0.2 Minimum conformance requirements for PSCell release delay

The requirements in this clause shall apply for a UE which is configured with PCell and one PSCell.

Upon receiving PSCell release in subframe *n*, the UE shall accomplish the release actions specified in TS 38.331 [13] no later than in subframe $n+ T_{RRC_delay}$:

Where

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [13].

The PCell interruption specified in TS 38.133 [6] clause 8.2 is allowed only during the RRC reconfiguration procedure in TS 38.331 [13].

The normative reference for this requirement is TS 38.133 [6] clause 8.9.3.

7.5.7.1 NR SA FR2 addition and release delay of known PSCell

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Test procedure

- Connection diagram

- Message contents are not complete.

- Test Requirements (still brackets in core-spec for PRACH preamble time [112] ms and CSI report time [20] ms)

- TT analysis is missing.

- Test Applicability in TS38.522

- Annex F

- Cell configuration mapping in Annex E

- NR FR1 - FR2 OTA testability is still FFS.

7.5.7.1.1 Test purpose

The purpose of this test is:

- To verify the requirement for the PSCell addition and release delay are within the requirements specified in TS 38.133 [6] clause 8.9.2, when the PSCell is known to the UE at the time of addition.

7.5.7.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.5.7.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 7.5.7.0.1 and 7.5.7.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.7.1.

7.5.7.1.4 Test description

7.5.7.1.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.5.7.1.4.1-1.

Table 7.5.7.1.4.1-1: Supported test configurations for NR SA FR2 PSCell

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
2	FR1 TDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.5.7.1.4.1-2.

Table 7.5.7.1.4.1-2: Initial conditions for NR SA FR2 SCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3..		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.7.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.7.1.4.1-3.
2. Message contents are defined in clause 7.5.7.1.4.3.
3. There are two NR carriers and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell (PSCell-to-be). Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.5.7.1.4.1-3: General test parameters for NR SA FR2 PSCell addition and release delay

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test
Active PCell			Cell 1	PCell on RF channel number 1 in FR1
Neighbour cell			Cell 2	Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2
A4	Hysteresis	dB	0	Hysteresis for event A4
	Threshold RSRP	dBm	-97	Threshold for event A4
	Time to Trigger	S	0	Time to trigger for event A4
DRX			OFF	For both PCell and PSCell once activated
Measurement gap pattern ID			0	Gaps are configured before T2 and released before T3.
PRACH configuration in Cell 2			FR2 PRACH configuration 2	PRACH configuration as specified in Clause A.3.8.3.2.
CSI reporting periodicity and offset configuration for Cell 2		ms	[2]	
T1		s	5	During this time the PCell is known and Cell 2 is unknown.
T2		s	1	During this time the UE shall identify neighbour cell 2 and report event B1.
T3		s	3.5	During this time the test system transmits the RRC messages to release measurement gap and add PSCell.

T4	s	1	During this time the UE adds the PSCell.
T5	s	1	During this time the UE sends CSI reports for PSCell.
T6	s	1	During this time the UE releases the PSCell.

7.5.7.1.4.2 Test procedure

TBD

7.5.7.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.5.7.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	FFS

7.5.7.1.5 Test requirement

TBD

7.5.7.2 NR SA FR2 addition and release delay of unknown PSCell

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- Test procedure
- Connection diagram
- Message contents are not complete
- Test Requirements (still brackets in core-spec for PRACH preamble time [572] ms and CSI report time [20] ms)
- TT analysis is missing
- Test Applicability in TS38.522
- Annex F
- Cell configuration mapping in Annex E
- NR FR1 - FR2 OTA testability is still FFS.

7.5.7.2.1 Test purpose

The purpose of this test is:

- To verify the requirement for the PSCell addition and release delay are within the requirements specified in TS 38.133 [6] clause 8.9.2, when the PSCell is unknown to the UE at the time of addition.

7.5.7.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.5.7.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 7.5.7.0.1 and 7.5.7.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.7.2.

7.5.7.2.4 Test description

7.5.7.2.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 7.5.7.2.4.1-1.

Table 7.5.7.2.4.1-1: Supported test configurations for NR SA FR2 PSCell

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
2	FR1 TDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.5.73.2.4.1-2.

Table 7.5.7.2.4.1-2: Initial conditions for NR SA FR2 PSCell addition and release delay

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.3.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.7.2.4.1-3.
2. Message contents are defined in clause 7.5.7.2.4.3.
3. There are two NR carriers and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is the neighbour cell (PSCell-to-be). Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.5.7.2.4.1-3: General test parameters for NR SA FR2 PSCell addition and release delay

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1 in FR1
Neighbour cell		Cell 2	Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2
DRX		OFF	For both PCell and PSCell once activated
PRACH configuration in Cell 2		FR2 PRACH configuration 2	PRACH configuration as specified in Clause A.3.8.3.2.
CSI reporting periodicity and offset configuration for Cell 2	ms	[2]	
T1	s	5	During this time the PCell is known and Cell 2 is unknown.
T2	s	1	During this time the UE adds the PSCell.
T3	s	1	During this time the UE sends CSI reports for PSCell.
T4	s	1	During this time the UE releases the PSCell.

7.5.7.2.4.2 Test procedure

TBD

7.5.7.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.5.7.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	FFS

7.5.7.2.5 Test requirement

TBD

7.5.8 Active TCI state switch delay

7.5.8.0 Minimum conformance requirements

7.5.8.0.0 Known conditions for TCI state

The TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target TCI state to the completion of active TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target TCI state or QCLed to the target TCI state
  - TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
  - The UE has sent at least 1 L1-RSRP report for the target TCI state before the TCI state switch command
  - The TCI state remains detectable during the TCI state switching period
  - The SSB associated with the TCI state remain detectable during the TCI switching period
    - SNR of the TCI state ≥ -3dB

Otherwise, the TCI state is unknown.

The normative reference for this requirement is TS 38.133 [6] clause 8.10.2.

7.5.8.0.1 Minimum conformance requirements for MAC-CE based active TCI state switch

If the target TCI state is known (according to clause 7.5.8.0.0), upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$) / *NR slot length*. The UE shall be able to receive PDCCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$ .Where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [8];

- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{SSB\text{-}proc}$ = 2 ms;
- TO_k = 1 if target TCI state is not in the active TCI state list for PDSCH, 0 otherwise.

If the target TCI state is unknown (according to clause 7.5.8.0.0), upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ T_{HARQ} +$3N_{slot}^{subframe,\mu}$ + $T_{L1\text{-}RSRP}$ +TO_{uk}*($T_{first\text{-}SSB}$+ $T_{SSB\text{-}proc}$) / *NR slot length*. The UE shall be able to receive PDCCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$.

Where

- $T_{L1\text{-}RSRP}$ = 0 in FR1 or when the TCI state switching not involving QCL-TypeD in FR2. Otherwise,
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as
- $T_{L1\text{-}RSPR_Measurement_Period_SSB}$ for SSB as specified in TS 38.133 [6] clause 9.5.4.1,
  - with the assumption of M=1
  - with T_{Report} = 0
- $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for CSI-RS as specified in TS 38.133 [6] clause 9.5.4.2
  - configured with higher layer parameter *repetition* set to ON
  - with the assumption of M=1 for periodic CSI-RS
  - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
  - with T_{Report} = 0
- TO_{uk} = 1 for CSI-RS based L1-RSRP measurement, and 0 for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD
- TO_{uk} = 1 when TCI state switching involves other QCL types only
- $T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;
- The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

The normative reference for this requirement is TS 38.133 [6] clause 8.10.3.

7.5.8.0.2 Minimum conformance requirements for RRC based active TCI state switch

If the target TCI state is known (according to clause 7.5.8.0.0), UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ ($T_{RRC_processing}$ +TO_k*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$)) / *NR slot length*, The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in Clause 11.2 of TS 36.331 [29] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in clause 12 of TS 38.331 [13].
- $T_{first\text{-}SSB}$ is time to first SSB transmission after RRC processing by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state.
- $T_{SSB\text{-}proc}$ and TO_k are defined in Ts 38.133 [6] clause 8.10.3.

If the target TCI state is unknown (according to clause 7.5.8.0.0), UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot n+ ($T_{RRC_processing}$ +$T_{L1\text{-}RSRP}$ +TO_{uk}*($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$)) / *NR slot length*, The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in clause 11.2 of TS 36.331 [29] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in clause 12 of TS 38.331 [13].

- $T_{first-SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;

- $T_{first-SSB}$ is time to first SSB transmission after RRC processing time at the UE for other QCL types;

  - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

- $T_{L1-RSRP}$, TO_{uk} and $T_{SSB-proc}$ are defined in TS 38.133 [6] clause 8.10.3.

The requirements for RRC based TCI state switch delay apply when only 1 TCI state is configured in RRC TCI state list. When $T_{HARQ} > T_{RRC_processing}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

The normative reference for this requirement is TS 38.133 [6] clause 8.10.5.

7.5.8.0.3 Minimum conformance requirements for MAC-CE based active TCI state switch in HST FR2

For FR2 power class 6 UE, if the target TCI state is known, upon receiving PDSCH carrying MAC-CE activation command in slot n, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the symbol m of the first slot that is after slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$ + TO_k*($T_{first-SSB}$ + $T_{SSB-proc}$ + T_{rs} + $T_{rs-proc}$) / *NR slot length*. The UE shall be able to receive PDCCH with the old TCI state until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$ .Where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{first-SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE;

- $T_{SSB-proc}$ = 2 ms;

- T_{rs} is time to the first TRS or SSB transmission after the SSB transmission in the definition of $T_{first-SSB}$ is processed by the UE;

- $T_{rs-proc}$ = 2 ms;

- TO_k = 1, m = 0 if target TCI state is not in the active TCI state list for PDSCH; otherwise TO_k = 0, m = 1.

When *highSpeedMeasFlagFR2-r17* is configured and *highSpeedLargeOneStepUL-TimingFR2-r17* is enabled for UE supporting FR2 power class 6 and *ue-OneShotUL-TimingAdj-r17 largeOneStepUL-timingFR2-r17* capability, the following requirements apply to the UE:

If the UE also indicates to support *tci-StateSwitchInd-r18* and *cross-RRH TCI state indicator for UE-specific PDCCH MAC-CE* as specified in Clause 6.1.3.77 of TS 38.321 [12] is indicated as '1' for the TCI state switch

- the UE transmit timing immediately after TCI state switch shall be $T_{new} - (N_{TA} + N_{TA\,offset}) + 2\times(T_{old} - T_{new})$ and clause 7.1.2 of TS 38.133 [6] requirements don't apply.

  - The UE UL transmission timing error after the TCI state switching procedure shall be less than or equal to $\pm T_e$ as specified in clause 7.1.2 of TS 38.133 [6] if the new target TCI state is within active TCI state list, otherwise ±7*64*T_c, and the reference point is $T_{new} - (N_{TA} + N_{TA\,offset}) + 2\times(T_{old} - T_{new})$.

If the UE also indicates to support *tci-StateSwitchInd-r18* and *cross-RRH TCI state indicator for UE-specific PDCCH MAC*-CE as specified in Clause 6.1.3.77 of TS 38.321 [12] is indicated as '0' for the TCI state switch

- the requirement in clause 7.1.2 of TS 38.133 [6] apply to the first UL transmission after a TCI state switch.

If the UE does not indicate to support *tci-StateSwitchInd-r18* or cross-RRH TCI state indicator for UE-specific PDCCH MAC-CE as specified in Clause 6.1.3.77 of TS 38.321 [12] is not indicated for the TCI state switch

- If the absolute value $|T_{old} - T_{new}| \leq [CP/4]$, the requirement in clause 7.1.2.1 of TS 38.133 [6] apply to the first UL transmission after a TCI state switch.

- Otherwise, the UE transmit timing immediately after TCI state switch shall be $T_{new} - (N_{TA} + N_{TA\,offset}) + 2\times(T_{old} - T_{new})$ and clause 7.1.2.1 of TS 38.133 [6] requirements don't apply.

- The UE UL transmission timing error after the TCI state switching procedure shall be less than or equal to $\pm T_e$ as specified in clause 7.1.2 if the new target TCI state is within active TCI state list, otherwise $\pm 7*64*T_c$,, and the reference point is $T_{new} - (N_{TA} + N_{TA\,offset}) + 2 \times (T_{old} - T_{new})$.

Above,

- T_{new} (in T_c units) is the DL timing defined as the time when UE receives downlink frame with new target TCI state.
- T_{old} (in T_c units) is the DL timing defined as the time when UE receives downlink frame with old source TCI state.

7.5.8.0.4 Known conditions for TCI state for UE operating in FR2-1 and configured with groupBasedBeamReporting-r17

Editor's note: FFS whether additional conditions are needed for tests.

Dual TCI states will be indicated in one or two TCI state switch commands. The dual target TCI states are known if the following conditions are met:

- Dual target TCI states are QCL-ed with typeD to reference signals in a resource group in the latest Rel-17 group based beam report
- The dual target TCI states and all the RSs in the two QCL chains remain detectable during the TCI state switching period
- SNR of the TCI state ≥ -3dB
- RS resource group configured for dual target TCI states is reported in the last [1280] ms.

7.5.8.0.5 DCI based dual DL TCI state switching delay for mDCI for UE operating in FR2-1 and configured with groupBasedBeamReporting-r17

For mDCI, if the dual target TCI states are known, when a UE is configured with the higher layer parameter *tci-PresentInDCI* from two TRPs which is set as 'enabled' for the DCIs scheduling two PDSCHs at slot n1 and n2 respectively, UE shall be able to receive PDSCHs with target TCI states of the serving cell on which TCI state switch occurs at the first slot that is after slot n1 + *timeDurationForQCL* and slot n2 + *timeDurationForQCL* respectively, where, *timeDurationForQCL* is the time required by the UE to perform PDCCH reception and apply spatial QCL information received in DCI for PDSCHs processing as described in TS 38.214 [19], the value of *timeDurationForQCL* is defined in TS 38.331 [13]. UE shall be able to simultaneously receive PDSCHs with target TCI states after slot max(n1, n2) + *timeDurationForQCL*.

For mDCI, if the dual target TCI states are known, when a UE is configured with the higher layer parameter *tci-PresentInDCI* from one TRP which is set as 'enabled' for the DCI scheduling PDSCHs at slot n1, while the indicated TCI for the other TRP remains unchanged, UE shall be able to simultaneously receive PDSCHs with target dual TCI states of the serving cell on which TCI state switch occurs at the first slot that is after slot n1 + *timeDurationForQCL*.

The known condition for dual target TCI states defined in clause 7.5.8.0.4 is applied.

7.5.8.0.6 DCI based dual DL TCI state switching delay for sDCI for UE operating in FR2-1 and configured with groupBasedBeamReporting-r17

For sDCI, if the dual target TCI states are known, when a UE is configured with the higher layer parameter *tci-PresentInDCI* from one TRP which is set as 'enabled' for the CORESET scheduling two PDSCHs at slot n, UE shall be able to receive PDSCHs with target TCI states of the serving cell on which TCI state switch occurs at the first slot that is after slot n+*timeDurationForQCL*, where, *timeDurationForQCL* is the time required by the UE to perform PDCCH reception and apply spatial QCL information received in DCI for PDSCHs processing as described in TS 38.214 [19], the value of *timeDurationForQCL* is defined in TS 38.331 [13].

The known condition for dual target TCI states defined in clause 7.5.8.0.4 is applied.

7.5.8.1 NR SA FR2 MAC-CE based active TCI state switch

7.5.8.1.1 NR SA PCell FR2 MAC-CE based active TCI state switch for a known TCI state

7.5.8.1.1.1 Test purpose

The purpose of this test is to verify the MAC-CE based active TCI state switch delay requirement specified in clause 7.5.8.0.1.

7.5.8.1.1.2 Test applicability

This test applies to all types of NR UE release 15 onwards supporting SA FR2, more than one TCI state configuration, and more than one simultaneously trackable TRS resource set.

7.5.8.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.8.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.8.1.1.

7.5.8.1.1.4 Test description

7.5.8.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.8.1.1.4.1-1.

Table 7.5.8.1.1.4.1-1: Supported test configurations for NR SA PCell FR2 MAC-CE based active TCI state switch for a known TCI state

Config	Description
7.5.8.1.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.8.1.1.4.1-2.

Table 7.5.8.1.1.4.1-2: Initial conditions for EN-DC FR2 MAC-CE based active TCI state switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.8.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.5.8.1.1.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.5.8.1.1.4.1-3.

Table 7.5.8.1.1.4.1-3: General test parameters for NR SA PCell FR2 MAC-CE based active TCI state switch for a known TCI state

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	0.2	

7.5.8.1.1.4.2 Test procedure

The test scenario comprises of one NR PCell (Cell 1) as given in Table 7.5.8.1.1.4.1-3. Cell-specific parameters of NR PCell are specified in Table 7.5.8.1.1.5-1. The OTA related test parameters for FR2 are shown in Table 7.5.8.1.1.5-2.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 2 different TCI states for PCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCIstate 1 (QCL'd to SSB1), in Cell 1 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. Figure 7.5.8.1.1.5-1 and Figure 7.5.8.1.1.5-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PCell on TCI state 0 till n+ T_{HARQ} +3 ms. The test equipment also verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after n+ T_{HARQ} +3 ms + ($T_{first\text{-}SSB}$ + $T_{SSB\text{-}proc}$).

Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.8.1.1.5-1. Propagation conditions are set according to clause C.2.3.
3. The SS transmits an *RRCReconfiguration* message to configure 2 different TCI states for Cell 1, PDCCH TCI state 0 (QCL'd to SSB0) and TCIstate 1 (QCL'd to SSB1), as indicated in clause 7.5.8.1.1.4.3. This message does not configure *tci-PresentInDCI* in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.
4. The UE transmits an *RRCReconfigurationComplete* message.
5. The SS shall send a MAC-CE to the UE indicating TCI state 0 as the active PDCCH TCI state. The SS shall continuously transmit PDCCHs to the UE indicating new transmissions on PCell to ensure that the UE is transmitting the corresponding ACK/NACK feedback.
6. T1 starts. During T1 only SSB0, to which PDCCH TCI-state 0 is QCL'd, is transmitted.
7. When T1 expires the SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reports for both SSB0 and SSB1 as indicated in clause 7.5.8.1.1.4.3. The start of T2 is the instant when the last TTI containing the *RRCReconfiguration* message is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 7.5.8.1.1.5-2 and SSB1, corresponding to TCI state 1, starts transmitting. T2 starts.
8. The SS sends, in slot n, a MAC-CE to indicate switch to TCI-state 1 as the active PDCCH TCI state. Slot n is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.
9. During T2, if the SS:
   a) Receives ACK/NACK on each UL transmission occasion scheduled on TCI-state 0 until slot n + T_{HARQ} +3 ms, and
   b) Receives ACK/NACK on TCI-state 1 corresponding to the next scheduled DL slot after n + T_{HARQ} +5 ms + $T_{first\text{-}SSB}$, where $T_{first\text{-}SSB}$ is the time to the first SSB transmission immediately after the MAC-CE command,

the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.

10. When T2 expires the SS shall sends a MAC-CE to indicate switch to TCI-state 0.

11. Wait 1s for the UE to switch TCI-state 0. If the SS receives ACK/NACK corresponding to PDSCH transmissions scheduled on TCI-state 0 continue to step 12. Otherwise switch the UE off and on and continue to step 1.

12. Repeat steps 2-11 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.8.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.8.1.1.4.3-1: Common Exception messages for NR SA PCell FR2 MAC-CE based active TCI state switch for a known TCI state

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB

Table 7.5.8.1.1.4.3-2: *ControlResourceSet* for NR SA PCell FR2 MAC-CE based active TCI state switch for a known TCI state

Derivation Path: TS 38.508-1 [14], Table 4.6.3-28			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
tci-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF {	2 entries		
TCI-StateId[0]	0	TCI.State.2	
TCI-StateId[1]	1	TCI.State.3	
}			
tci-PresentInDCI	Not present		
}			

Table 7.5.8.1.1.4.3-3: *PDSCH-Config* for NR SA PCell FR2 MAC-CE based active TCI state switch for a known TCI state

Derivation Path: TS 38.508-1 [14], Table 4.6.3-100			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[0]	TCI.State.2	TCI-StateId 2	
TCI-State[1]	TCI.State.3	TCI-StateId 3	
}			
}			

Table 7.5.8.1.1.4.3-4: *TCI-State* for NR SA PCell FR2 MAC-CE based active TCI state switch for a known TCI state

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**
TCI-State ::= SEQUENCE {	2 entries		
{			
tci-StateId	0	TCI.State.2	
qcl-Type1 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			

csi-rs	3	TRS.2.1 TDD Resource #4 Note1	
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	3	TRS.2.1 TDD Resource #4 Note1	
}			
qcl-Type	typeD		
}			
},			
{			
tci-StateId	1	TCI.State.3	
qcl-Type1 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	7	TRS.2.2 TDD Resource #4 Note1	
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	7	TRS.2.2 TDD Resource #4 Note1	
}			
qcl-Type	typeD		
}			
}			
}			
Note 1: Both TRS.2.1 TDD and TRS.2.2 TDD are configured on the UE. The assumption to configure this field is that nzp-CSI-RS-ResourceId indices are configured in the following order: TRS.2.1 TDD = {0,1,2,3}, TRS.2.2 TDD = {4,5,6,7}, so resource #4 for each set corresponds to index 3 and 7, accordingly.			

7.5.8.1.1.5 Test requirement

Tables 7.5.8.1.1.4.1-3, 7.5.8.1.1.5-1 and 7.5.8.1.1.5-2 define the primary level settings including test tolerances for NR SA Pcell FR2 MAC-CE based active TCI state switch for a known TCI state.

Table 7.5.8.1.1.5-1: NR Cell specific test parameters for NR SA Pcell FR2 MAC-CE based active TCI state switch for a known TCI state

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.2
TCI State 1		TCI.State.3
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
Correlation Matrix and Antenna Configuration		1x2 Low

EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].		

Table 7.5.8.1.1.5-2: OTA related test parameter for NR SA Pcell FR2 MAC-CE based active TCI state switch for a known TCI state

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.9			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.9	-80.9	-Infinity	-80.9
SS B_RP Note 2	dBm/ SCS	-80.9	-80.9	-Infinity	-80.9
$\hat{E}_s / I_{otBB}$ Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-55.71	-55.71	- Infinity	-55.71
Note 1: Void Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone. Note 6: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation. Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [3] Table 6.2.1.3-4.					

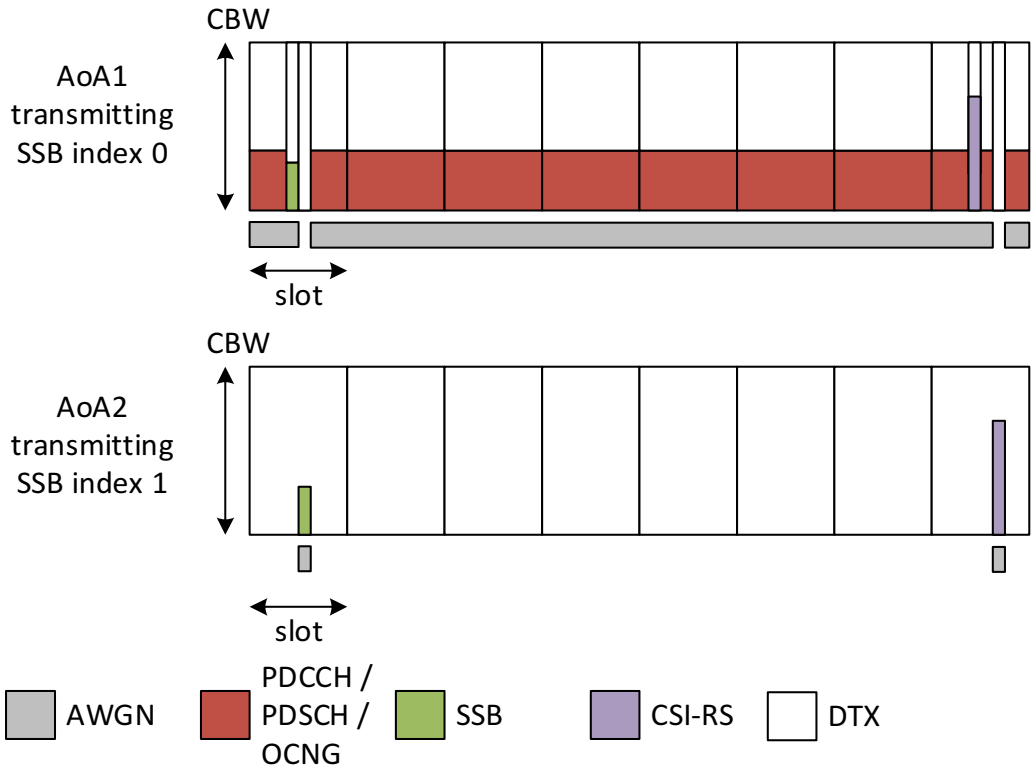

Figure 7.5.8.1.1.5-1: Time multiplexed downlink transmissions during T1

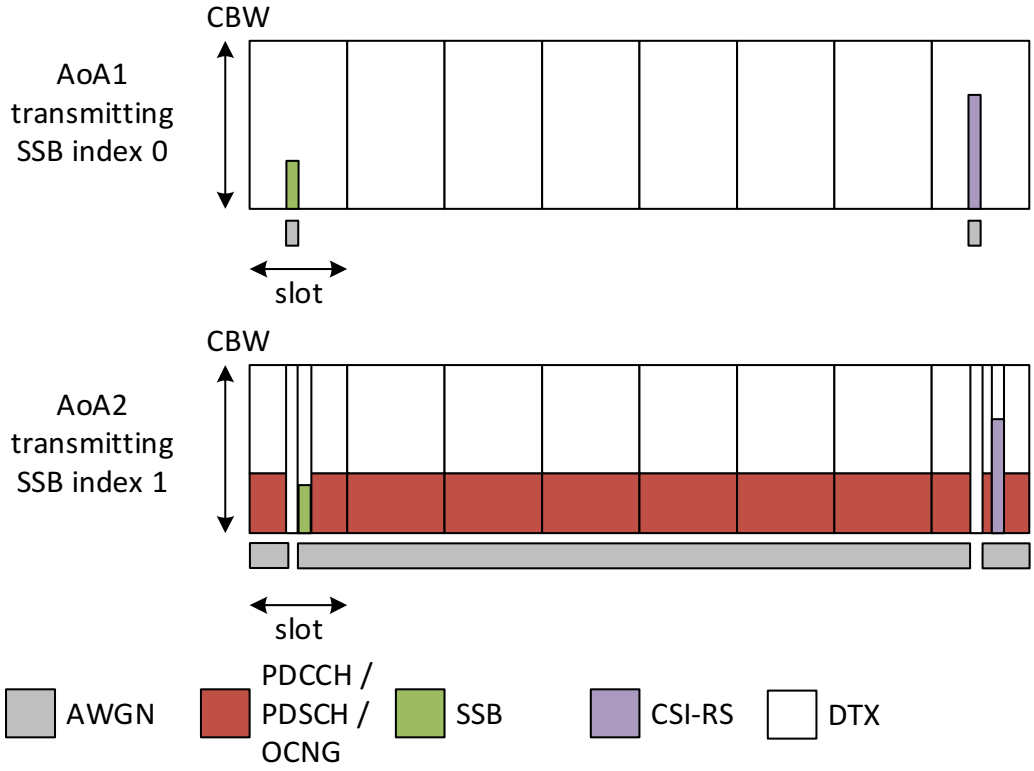

Figure 7.5.8.1.1.5-2: Time multiplexed downlink transmissions during T2

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on TCI state 0 till n+ T_{HARQ} +3 ms
- be able to start receiving on TCI state 1 after n+ T_{HARQ} +5 ms + $T_{first-SSB}$

7.5.8.2 NR SA FR2 RRC based active TCI state switch

7.5.8.2.1 NR SA Pcell FR2 RRC based active TCI state switch for a known TCI state

7.5.8.2.1.1 Test purpose

The purpose of this test is to verify the RRC based active TCI state switch delay requirement specified in clause 7.5.8.0.2.

7.5.8.2.1.2 Test applicability

This test applies to all types of NR UE release 15 onwards supporting SA FR2, more than one TCI state configuration, and more than one simultaneously trackable TRS resource set.

7.5.8.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.8.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.8.2.1.

7.5.8.2.1.4 Test description

7.5.8.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.8.2.1.4.1-1.

Table 7.5.8.2.1.4.1-1: Supported test configurations for NR SA Pcell FR2 RRC based active TCI state switch for a known TCI state

Config	Description
7.5.8.2.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.8.2.1.4.1-2.

Table 7.5.8.2.1.4.1-2: Initial conditions for NR SA Pcell FR2 RRC based active TCI state switch for a known TCI state

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.8.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.5.8.2.1.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.5.8.2.1.4.1-3.

Table 7.5.8.2.1.4.1-3: General test parameters for NR SA Pcell FR2 RRC based active TCI state switch for a known TCI state

Parameter	Unit	Value	Comment

NR RF Channel Number		1	One NR radio channel is used for this test
Active Pcell		Cell 1	Pcell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	2	

7.5.8.2.1.4.2 Test procedure

The test scenario comprises of one NR Pcell (Cell 1) as given in Table 7.5.8.2.1.4.1-3. Cell-specific parameters of NR PCell are specified in Table 7.5.8.2.1.5-1. The OTA related test parameters for FR2 is shown in Table 7.5.8.2.1.5-2.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 1 TCI state for PCell, PDCCH-TCI-state0 (QCL'd to SSB0)
- UE is indicated in TCI state0 as the active TCI state

The test consists of two time periods, T1 and T2. Figure 7.5.8.2.1.5-1 and Figure 7.5.8.2.1.5-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI-state1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a RRC command indicating a switch to TCI-state1.

The test equipment verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after n+ $T_{RRC_processing}$ + $T_{first\text{-}SSB}$ + 2ms.

Unless otherwise stated, the downlink signal and noise are aligned to arrive in the UE Rx beam peak direction.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.8.2.1.5-1. Propagation conditions are set according to clause C.2.3.
3. The SS transmits an *RRCReconfiguration* message to configure 1 TCI state for Cell 1, PDCCH TCI state 0 (QCL'd to SSB0) and indicating TCI state 0 as the active PDCCH TCI state, as indicated in clause 7.5.8.2.1.4.3. This message does not configure *tci-PresentInDCI* in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.
4. The UE transmits an *RRCReconfigurationComplete* message.
5. The SS shall continuously transmit PDCCHs to the UE indicating new transmissions on Pcell to ensure that the UE is transmitting the corresponding ACK/NACK feedback.
6. T1 starts. During T1 only SSB0, to which PDCCH TCI-state 0 is QCL'd, is transmitted.
7. When T1 expires the SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reports for both SSB0 and SSB1 as indicated in clause 7.5.8.2.1.4.3. The start of T2 is the instant when the last TTI containing the *RRCReconfiguration* message is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 7.5.8.2.1.5-2 and SSB1, corresponding to TCI state 1, starts transmitting. T2 starts.
8. The SS sends, in slot n, an *RRCReconfiguration* message to indicate switch to TCI-state 1 as the active PDCCH TCI state, as indicated in clause 7.5.8.2.1.4.3. Slot n is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.
9. The UE transmits an *RRCReconfigurationComplete* message.

10. During T2, if the SS receives ACK/NACK on TCI-state 1 corresponding to the next scheduled DL slot after n + $T_{first-SSB}$ + 12 ms, where $T_{first-SSB}$ is the time to the first SSB transmission immediately after the RRC processing by the UE, the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.

11. When T2 expires the SS shall sends an *RRCReconfiguration* message to indicate switch to TCI-state 0 as the active PDCCH TCI state and releasing TCI-state 1.

12. The UE transmits an *RRCReconfigurationComplete* message.

13. Wait 2s for the UE to switch TCI-state 0. If the SS receives ACK/NACK corresponding to PDSCH transmissions scheduled on TCI-state 0 continue to step 14. Otherwise switch the UE off and on and continue to step 1.

14. Repeat steps 2-13 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.8.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.8.2.1.4.3-1: Common Exception messages for NR SA PCell FR2 RRC based active TCI state switch for a known TCI state

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB

Table 7.5.8.2.1.4.3-2: *ControlResourceSet* for NR SA PCell FR2 RRC based active TCI state switch for a known TCI state

Derivation Path: TS 38.508-1 [14], Table 4.6.3-28			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
tci-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF {	1 entry	1 entry configured at a time (steps 3 and 8)	
TCI-StateId[0]	0	TCI.State.2	Step 3
TCI-StateId[1]	1	TCI.State.3	Step 8
}			
tci-PresentInDCI	Not present		
}			

Table 7.5.8.2.1.4.3-3: *PDSCH-Config* for NR SA PCell FR2 RRC based active TCI state switch for a known TCI state

Derivation Path: TS 38.508-1 [14], Table 4.6.3-100			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	1 entry	1 entry configured at a time (steps 3 and 8)	
TCI-State[0]	TCI.State.2	TCI-StateId 2	Step 3
TCI-State[1]	TCI.State.3	TCI-StateId 3	Step 8
}			
}			

Table 7.5.8.2.1.4.3-4: *TCI-State* for NR SA PCell FR2 RRC based active TCI state switch for a known TCI state (step 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**

TCI-State ::= SEQUENCE {	1 entry	1 entry configured at a time (steps 3 and 8)	
{			
tci-StateId	0	TCI.State.2	Step 3
qcl-Type1 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	3	TRS.2.1 TDD Resource #4 Note1	
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	3	TRS.2.1 TDD Resource #4 Note1	
}			
qcl-Type	typeD		
}			
}			
}			
Note 1: TRS.2.1 TDD is configured on the UE. The assumption to configure this field is that nzp-CSI-RS-ResourceId indices are configured in the following order: TRS.2.1 TDD = {0,1,2,3}, so resource #4 for the set corresponds to index 3, correspondingly.			

Table 7.5.8.2.1.4.3-5: *TCI-State* for NR SA PCell FR2 RRC based active TCI state switch for a known TCI state (step 8)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**
TCI-State ::= SEQUENCE {	1 entry	1 entry configured at a time (steps 3 and 8)	
{			
tci-StateId	1	TCI.State.3	Step 8
qcl-Type1 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	7	TRS.2.2 TDD Resource #4 Note1	
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	7	TRS.2.2 TDD Resource #4 Note1	
}			
qcl-Type	typeD		
}			
}			
}			
Note 1: TRS.2.2 TDD is configured on the UE. The assumption to configure this field is that nzp-CSI-RS-ResourceId indices are configured in the following order: TRS.2.2 TDD = {4,5,6,7}, so resource #4 for the set corresponds to index 7, correspondingly.			

7.5.8.2.1.5 Test requirement

Tables 7.5.8.2.1.4.1-3, 7.5.8.2.1.5-1 and 7.5.8.2.1.5-2 define the primary level settings including test tolerances for NR SA PCell FR2 RRC based active TCI state switch for a known TCI state.

Table 7.5.8.2.1.5-1: NR Cell specific test parameters for NR SA PCell FR2 RRC based active TCI state switch for a known TCI state

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1

$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.2
TCI State 1		TCI.State.3
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	640
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].		

Table 7.5.8.2.1.5-2: OTA related test parameter for NR SA PCell FR2 RRC based active TCI state switch for a known TCI state

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.9			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.9	-80.9	-Infinity	-80.9
SS B_RP Note 2	dBm/ SCS	-80.9	-80.9	-Infinity	-80.9
$\hat{E}_s / I_{otBB}$ Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-55.71	-55.71	- Infinity	-55.71

Note 1:	Void
Note 2:	SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6:	Information about types of UE beam is given in 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [3] Table 6.2.1.3-4.

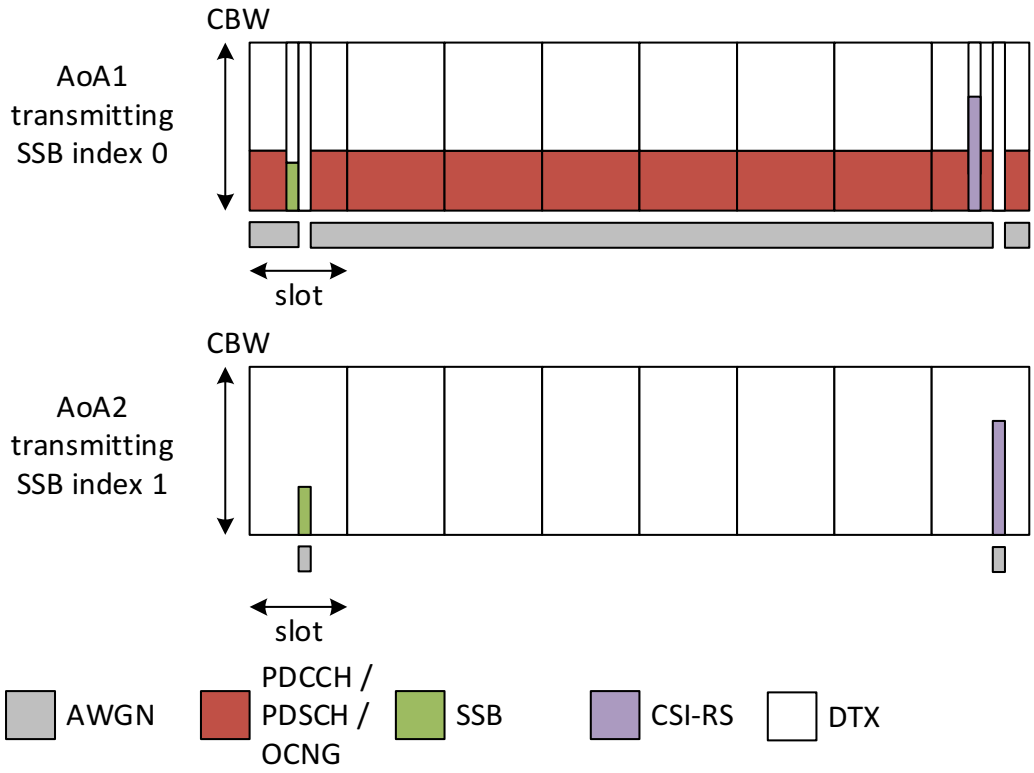

Figure 7.5.8.2.1.5-1: Time multiplexed downlink transmissions during T1

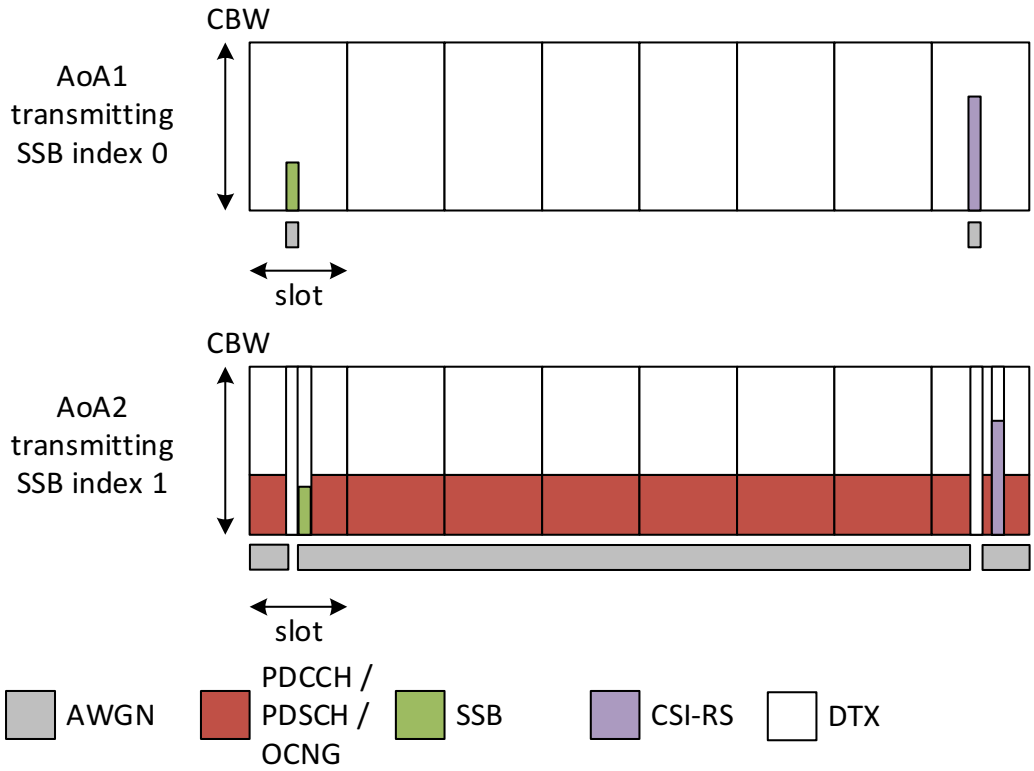

Figure 7.5.8.2.1.5-2: Time multiplexed downlink transmissions during T2

During T2, UE shall send L1-RSRP report with both SSB0 and SSB1.

After receiving RRC command in slot n, UE shall be able to start receiving on TCI state 1 after n+ $T_{RRC_processing}$ + $T_{first-SSB}$ + 2ms.

7.5.8.3 MAC-CE based active TCI state switch for HST FR2 scenario

7.5.8.3.1 NR SA FR2 HST active TCI state switch for a known TCI state

Editor's note: This test case is incomplete. The following aspects are either missing or TBD:

- Test tolerance and measurement uncertainty analysis are missing

7.5.8.3.1.1 Test Purpose

The purpose of this test is to verify the active TCI state switch delay requirement defined in TS 38.133[6] section 8.10.13A for FR2 power class 6 UE. Furthermore, the purpose of this test is also to verify the one shot large timing adjustment requirement as specified in TS 38.133[6] section 7.1.2.3.

7.5.8.3.1.2 Test Applicability

This test applies to all types of NR UE power class 6 release 17 onwards that supports one shot UL large timing adjustment *largeOneStepUL-timingFR2-r17*.

7.5.8.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.8.0.3.

The normative reference for this requirement is TS 38.133 [6] clauses 7.1.2.3, 8.10.13A and A.7.5.8.3.1.

7.5.8.3.1.4 Test description

Supported test configurations are shown in table 7.5.8.3.1.4.1-1. The test parameters are given in Tables 7.5.8.3.1.4.1-2, 7.5.8.3.1.4.1-3 and 7.5.8.3.1.5-1 below. There is one cell (Cell 1), which is the active NR cell, in the test.

The test consists of two successive time periods, with time duration of T1 and T2. Figure 7.5.8.3.1.4-1 and Figure 7.5.8.3.1.4-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting, which has the relative timing delay compared to TCI state 0 by the absolute value of the one-way differential propagation time [$|T_{old} - T_{new}| = 2.33\ \mu s$].

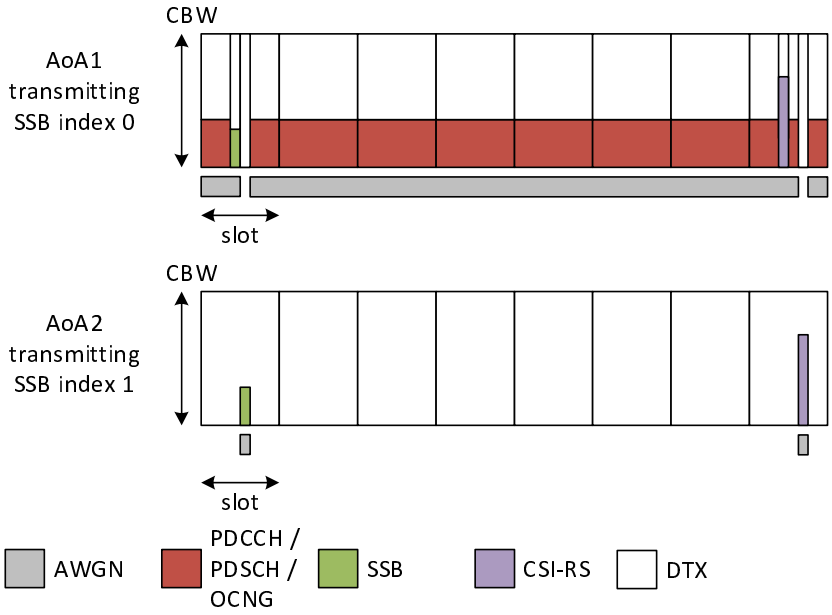

Figure 7.5.8.3.1.4-1: Time multiplexed downlink transmissions during T1

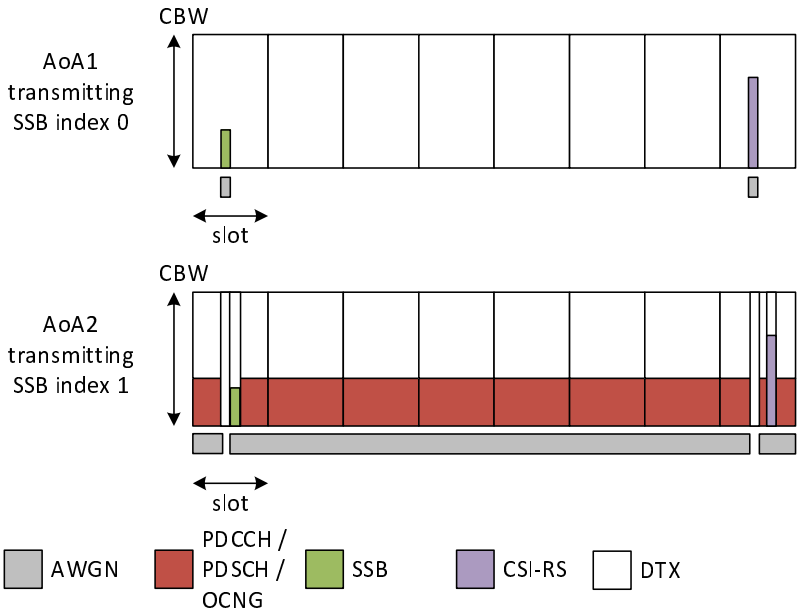

Figure 7.5.8.3.1.4-2: Time multiplexed downlink transmissions during T2

7.5.8.3.1.4.1 Initial conditions

Table 7.5.8.3.1.4.1-1: Supported test configurations

Config	Description
7.5.8.3.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 2 different TCI states for PCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCI state 1 (QCL'd to SSB1), in Cell 1 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state.

Configure the test equipment and the DUT according to the parameters in Table 7.5.6.1.3.4.1-2.

Table 7.5.8.3.1.4.1-2: Initial conditions for Active TCI state switch delay for HST FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.8.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 7.5.8.3.1.4.1-3: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	0.2	

1. The general test parameter settings are set up according to Table 7.5.8.3.1.4.1-3.
2. Message contents are defined in clause 7.5.8.3.1.4.3.
3. The test scenario comprises of 1 NR Cell. The connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.
4. The rx beam peak and directions in which the UE meets the EIS spherical coverage criteria have been found with one of the procedures from Annex I.

7.5.8.3.1.4.2 Test procedure

There is one cell (Cell 1), which is the active NR cell, in the test. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. During the test PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 7.5.8.3.1.5-2.
3. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting, which has the relative timing delay compared to TCI state 0 by the absolute value of the one-way differential propagation time [$|T_{old} - T_{new}| = 2.33\ \mu s$].
4. The UE shall start sending periodic L1-RSRP reports.

5. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

6. After the TCI state switch, the UE transmit timing accuracy shall be measured by the test equipment by using the SRS defined in Table 7.5.8.3.1.5-3.

7. Repeat steps 2-6 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.8.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table 4.6.3-169 in 38.508-1 [14] with condition R17 HST FR2
Specific message contents exceptions for Test Configuration 7.5.8.3.1-1	

7.5.8.3.1.5 Test requirements

Table 7.5.8.3.1.5-2 defines the primary level settings including test tolerances for all tests.

Table 7.5.8.3.1.5-1: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.0
TCI State 1		TCI.State.1
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		

Propagation Condition		AOA1: No external noise (Note 2) AOA2: No external noise (Note 2) with 19444 Hz frequency offset
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].		

Table 7.5.8.3.1.5-2: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.9.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6+TT	-80.6+TT	-Infinity	-80.6+TT
SSB_RP Note 2	dBm/ SCS	-80.6+TT	-80.6+TT	-Infinity	-80.6+TT
$\hat{E}_s/I_{ot}$ BB Note 7	dB	8.3+TT	8.3+TT	-Infinity	8.3+TT
Io Note2	dBm/95.04 MHz Note4	-56.0+TT	-56.0+TT	- Infinity	-56.0+TT
Note 1: Void Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.6-4.					

Table 7.5.8.3.1.5-3: Sounding Reference Symbol Configuration

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=0	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After the TCI state switch, the UE transmission timing immediately after TCI state switch shall follow the requirements as specified in clause 7.5.8.3.1.0.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on TCI state 0 till n+ T_{HARQ} +3 ms
- be able to start receiving on TCI state 1 after n+ T_{HARQ} +7 ms + $T_{first\text{-}SSB+}$ T_{rs}

The rate of correct events observed during repeated tests shall be at least [90]%.

7.5.8.3.2 NR SA FR2 HST active TCI state switch for PC6 UE supporting *tci-StateSwitchInd-r18* a known TCI state

Editor's note: This test case is incomplete. The following aspects are either missing or TBD:

- Test tolerance and measurement uncertainty analysis are missing

7.5.8.3.2.1 Test Purpose

The purpose of this test is to verify the active TCI state switch delay and timing adjustment applicable for FR2 power class 6 UE supporting *tci-StateSwitchInd-r18* capability as defined in clause 7.5.8.0.3 by configuring *highSpeedMeasFlagFR2-r17* and cross-RRH TCI state indicator for UE-specific PDCCH MAC CE as defined in clause 6.1.3.77 of TS 38.321 [12] is set to 0.

7.5.8.3.2.2 Test Applicability

This test applies to all types of NR UE power class 6 release 18 onwards that support *tci-StateSwitchInd-r18.*

7.5.8.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.8.0.3.

The normative reference for this requirement is TS 38.133 [6] clauses 7.1.2.3, 8.10.3A and A.7.5.8.3.2.

7.5.8.3.2.4 Test description

The supported test configuration is shown in Table 7.5.8.3.2.4.1-1. The test parameters are given in Tables 7.5.8.3.2.4.1-2, 7.5.8.3.2.4.1-3 and 7.5.8.3.2.5-1 below. There is one cell (Cell 1), which is the active NR cell, in the test.

During the test, *highSpeedMeasFlagFR2-r17* is configured to be *set2* and broadcast to UE. PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

The test consists of two time periods, T1 and T2. Figure 7.5.8.3.2.4-1 and Figure 7.5.8.3.2.4-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. From the beginning of T2, the SSB corresponding to TCI state 1 is transmitted. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1 with cross-RRH TCI state indicator for UE-specific PDCCH *MAC CE* set as '0'. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state. After the TCI state switch, the UE transmit timing accuracy shall be measured by the test equipment by using the SRS defined in Table 7.5.8.3.2.5-3. TCI state 1 has relative timing delay of 4.5*64*Tc compared to TCI state 0.

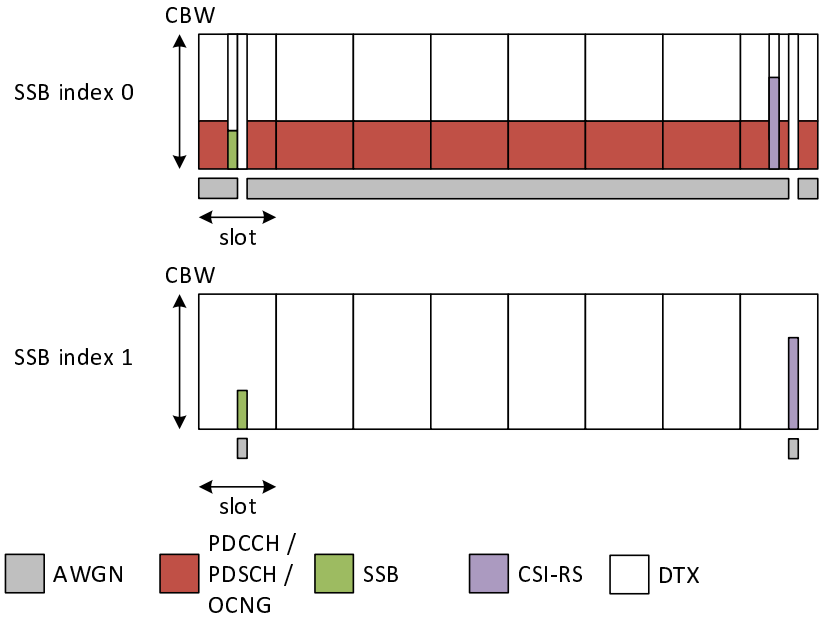

Figure 7.5.8.3.2.4-1: Time multiplexed downlink transmissions during T1

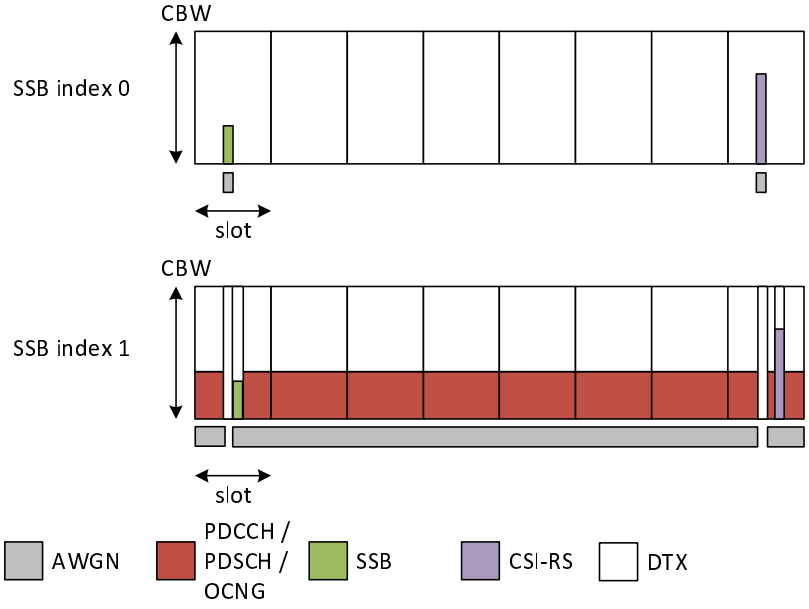

Figure 7.5.8.3.2.4-2: Time multiplexed downlink transmissions during T2

7.5.8.3.2.4.1 Initial conditions

Table 7.5.8.3.2.4.1-1: Supported test configurations

Config	Description
7.5.8.3.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).

- UE is configured with 2 different TCI states for PCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCI state 1 (QCL'd to SSB1), in Cell 1 before starting the test.

- UE is indicated in TCI state 0 as the active PDCCH TCI state

Configure the test equipment and the DUT according to the parameters in Table 7.5.8.3.2.4.1-2.

Table 7.5.8.3.2.4.1-2: Initial conditions for Active TCI state switch delay for HST FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 4.3.1.2		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.8.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 7.5.8.3.2.4.1-3: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	0.2	

1. The general test parameter settings are set up according to Table 7.5.8.3.2.4.1-3.

2. Message contents are defined in clause 7.5.8.3.2.4.3.

3. The test scenario comprises of 1 NR Cell. The connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

4. The rx beam peak and directions in which the UE meets the EIS spherical coverage criteria have been found with one of the procedures from Annex I.

7.5.8.3.2.4.2 Test procedure

There is one cell (Cell 1), which is the active NR cell, in the test. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. During the test PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.5.8.3.2.5-2.

3. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting, which has relative timing delay of 4.5*64*Tc compared to TCI state 0

4. The UE shall start sending periodic L1-RSRP reports.

5. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1 with with cross-RRH TCI state indicator for UE-specific PDCCH MAC CE indicated as '0'. tci-PresentInDCI is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

6. After the TCI state switch, the UE transmit timing accuracy shall be measured by the test equipment by using the SRS defined in Table 7.5.8.3.2.5-3.

7. Repeat steps 2-6 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved

7.5.8.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table 4.6.3-169 in 38.508-1 [14] with condition R17 HST FR2
Specific message contents exceptions for Test Configuration	

7.5.8.3.2.5 Test requirements

Table 7.5.8.3.2.5-2 defines the primary level settings including test tolerances for all tests.

Table 7.5.8.3.2.5-1: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.0
TCI State 1		TCI.State.1
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		[AWGN with 9722 Hz frequency offset]
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 7.5.8.3.2.5-2: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.9.3			
Assumption for UE beams Note 4		Rough			
$\hat{E}_s$	dBm/SCS	-80.6+TT	-80.6+TT	Infinity	-80.6+TT
SSB_RP Note 1	dBm/ SCS	-80.6+TT	-80.6+TT	Infinity	-80.6+TT
$\hat{E}_s/I_{ot_{BB}}$ Note 5	dB	8.3+TT	8.3+TT	Infinity	8.3+TT
Io Note1	dBm/95.04 MHz Note4	-56.0+TT	-56.0+TT	Infinity	-56.0+TT
Note 1: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 3: As observed with 0dBi gain antenna at the center of the quiet zone. Note 4: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 5: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.6-4.					

Table 7.5.8.3.2.5-3: Sounding Reference Symbol Configuration

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=0	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After the TCI state switch, the UE transmission timing immediately after TCI state switch shall follow the requirements as specified in clause 7.5.8.0.3.

After receiving, TCI state switch command with cross-RRH TCI state indicator for UE-specific PDCCH MAC CE set to '0' in slot n, UE shall:

- be able to continue to receive on TCI state 0 till n+ T_{HARQ} +3 ms
- be able to start receiving on TCI state 1 after n+ T_{HARQ} +5 ms + $T_{first\text{-}SSB}$.

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.8.4 NR SA FR2 DCI based active TCI state switch with m-DCI for simultaneous reception

Editor's note: This test case is incomplete. The following aspect is either missing or TBD:

- Test tolerance analysis and measurement uncertainty are missing

- Test procedure is subject to change- Configuration of 3AoA setup and testability of the device is still FFS

7.5.8.4.1 Test Purpose

The purpose of this test is to verify the DCI based active TCI state switch delay requirement specified in clause 7.5.8.0.5.

7.5.8.4.2 Test Applicability

This test applies to all types of NR UE release 18 onwards supporting SA FR2, more than one TCI state configuration, more than one simultaneously trackable TRS resource set, multi-DCI based multi-TRP, simultaneous reception with different QCL Type D, and group based beam reporting.

7.5.8.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.8.0.4 and 7.5.8.0.5.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.8.4.

7.5.8.4.4 Test description

7.5.8.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.8.4.4.1-1.

Table 7.5.8.4.4.1-1: Supported test configurations for NR SA FR2 PCell DCI based active TCI state switch with m-DCI for simultaneous reception

Config	Description
7.5.8.4-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.8.4.4.1-2.

Table 7.5.8.4.4.1-2: Initial conditions for NR SA FR2 PCell DCI based active TCI state switch with m-DCI for simultaneous reception

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.8.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.5.8.4.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.5.8.4.4.1-3.

Table 7.5.8.4.4.1-3: General test parameters for NR SA FR2 PCell DCI based active TCI state switch with m-DCI for simultaneous reception

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.8	
T2	s	0.2	

7.5.8.4.4.2 Test procedure

The test scenario comprises of one NR PCell (Cell 1) as given in Table 7.5.8.4.4.1-3. Cell-specific parameters of NR PCell are specified in Table 7.5.8.4.5-1. The OTA related test parameters for FR2 are shown in Table 7.5.8.4.5-2.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).

The UE is configured with the following TCI states: TCI state 0 (QCL'd to SSB0), TCI state 1 (QCL'd to SSB1), TCI state 2 (QCL'd to SSB2) and TCI state 3 (QCL'd to SSB3).

- UE is indicated with the following TCI states for Cell 1 (PCell):
- PDCCH TCI state 0 (QCL'd to SSB0), PDSCH TCI state 0 (QCL'd to SSB0) for CORESETPoolIndex 0, and
- PDCCH TCIstate 1 (QCL'd to SSB1), PDSCH TCI state 1 (QCL'd to SSB1) for CORESETPoolIndex 1.
- UE is configured with groupBasedBeamReporting-r17 for SSB index 3 and SSB index 4.
- tci-PresentInDCI is configured in the PDSCH configuration.

The test consists of two time periods, T1 and T2. During T1, the time multiplexed (allocation in Frequency is symbolic) downlink transmissions are scheduled from each Angle of Arrival (AoA1, AoA2 and AoA3) as shown in Figure A.7.5.8.4.1-1. UE is configured to transmit periodic L1-RSRP group-based beam reports on SSB index 2 and SSB index 3. After UE transmits the first L1-RSRP group-based beam report with SSB index 2 and SSB index 3 as a beam pair, TE sends TCI state activation MAC-CEs to activate TCI state 2 and TCI state 3 for PDSCHs.

T2 starts at a time that is not earlier than active TCI state list update delay (as defined in section 8.10E.6.2) from the time UE has received the TCI state activation MAC-CEs. At the beginning of T2, at slot n, UE receives DCI to switch PDSCH TCI state on CORESETPoolIndex 0 for indicating the TCI state switch of PDSCH to TCI state 2. At slot n+1, UE receives DCI to switch PDSCH TCI state on CORESETPoolIndex 1 for indicating the TCI state switch of PDSCH to TCI state 3. During T2, the time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival is shown in Figure A.7.5.8.4.1-2.

The test equipment verifies the TCI state switch time in PCell by scheduling the UE on TCI state 2 and TCI state 3 simultaneously after slot n + 1 + timeDurationForQCL

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.8.4.5-1. Propagation conditions are set according to clause C.2.3.
3. The SS transmits an RRCReconfiguration message to configure 2 different TCI states for Cell 1, PDCCH TCI state 0 (QCL'd to SSB0) and TCI state 1 (QCL'd to SSB1), as indicated in clause 7.5.8.4.4.3. This message also configures tci-PresentInDCI in the PDSCH configuration. This message also configures 4 different TCI states

for Cell 1 PDSCH, TCI state 0 (QCL'd to SSB0), TCI state 1 (QCL'd to SSB1), TCI state 2 (QCL'd to SSB2) and TCI state 3 (QCL'd to SSB3).

4. The UE transmits an RRCReconfigurationComplete message.

5. The SS shall send a MAC-CE to the UE indicating TCI state 0 and TCI state 1 as the active PDCCH TCI states, and TCI state 0 and TCI state 1 as the active PDSCH TCI states. The SS shall continuously transmit PDCCHs and PDSCHs to the UE indicating new transmissions on PCell to ensure that the UE is transmitting the corresponding ACK/NACK feedback.

6. T1 starts. UE is configured to transmit periodic L1-RSRP group-based beam reports for SSB index 2 and SSB index 3. The UE transmits the first L1-RSRP group-based beam report with SSB index 2 and SSB index 3 as a resource group.

7. The SS sends TCI state activation MAC-CEs to activate TCI state 3 and TCI state 4 for PDSCHs. The SS shall continuously transmit PDCCHs and PDSCHs to the UE indicating new transmissions on PCell to ensure that the UE is transmitting the corresponding ACK/NACK feedback.

8. When T1 expires the SS transmits an RRCReconfiguration message to configure periodic L1-RSRP reports for both SSB2 and SSB3 as indicated in clause 7.5.8.4.4.3. The start of T2 is the instant when the last TTI containing the RRCReconfiguration message is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 7.5.8.4.5-2 and SSB2, and SSB3, corresponding to TCI state 2, and TCI state3, starts transmitting. T2 starts.

9. The SS sends, in slot n, DCI to switch PDSCH TCI state on CORESETPoolIndex 0 for indicating the TCI state switch of PDSCH to TCI state 2. Slot n is within 1280 ms of UE providing group-based L1-RSRP report with results for SSB2 and SSB3 as a reference group.

10. The SS sends, in slot n+1, DCI to switch PDSCH TCI state switch on CORESETPoolIndex 1 for indicating the TCI state switch of PDSCH to TCI state 3.

11. During T2, if the SS receives ACK/NACK on TCI state 2 and TCI state 3, corresponding to the next scheduled DL slot after slot n + 1 + timeDurationForQCL, the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.

12. If the SS receives ACK/NACK corresponding to PDSCH transmissions scheduled on TCI state 2 and TCI state 3 continue to step 13. Otherwise switch the UE off and on and continue to step 1.

13. Repeat steps 2-12 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.8.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.8.4.4.3-1: Common Exception messages for NR SA FR2 PCell DCI based active TCI state switch with m-DCI for simultaneous reception

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.6-2 with conditions PERIODIC and SS-RSRP and groupBasedBeamReporting enabled Table H.3.6-3 with condition SSB

Table 7.5.8.4.4.3-2: ControlResourceSet for NR SA FR2 PCell DCI based active TCI state switch with m-DCI for simultaneous reception

Derivation Path: TS 38.508-1 [14], Table 4.6.3-28			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
tci-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF {	2 entries		
TCI-StateId[0]	0	TCI.State.2	

TCI-StateId[1]	1	TCI.State.3	
}			
tci-PresentInDCI	present		
}			

Table 7.5.8.4.4.3-3: PDSCH-Config for NR SA FR2 PCell DCI based active TCI state switch with m-DCI for simultaneous reception

Derivation Path: TS 38.508-1 [14], Table 4.6.3-100			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	4 entries		
TCI-State[0]	TCI.State.2	TCI-StateId 2	
TCI-State[1]	TCI.State.3	TCI-StateId 3	
TCI-State[2]	TCI.State.2	TCI-StateId 2	
TCI-State[3]	TCI.State.3	TCI-StateId 3	
}			
}			

Table 7.5.8.4.4.3-4: TCI-State for NR SA FR2 PCell DCI based active TCI state switch with m-DCI for simultaneous reception

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**
TCI-State ::= SEQUENCE {	4 entries		
{			
tci-StateId	0	TCI.State.2	
qcl-Type1 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	3	TRS.2.1 TDD Resource #4 Note1	
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	3	TRS.2.1 TDD Resource #4 Note1	
}			
qcl-Type	typeD		
}			
},			
{			
tci-StateId	1	TCI.State.3	
qcl-Type1 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	7	TRS.2.2 TDD Resource #4 Note1	
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	7	TRS.2.2 TDD Resource #4 Note1	
}			
qcl-Type	typeD		
}			
},			
{			
tci-StateId	3	TCI.State.2	
qcl-Type1 SEQUENCE {			
bwp-Id	1		

referenceSignal CHOICE {			
csi-rs	3	TRS.2.1 TDD Resource #4 Note1	
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	3	TRS.2.1 TDD Resource #4 Note1	
}			
qcl-Type	typeD		
},			
{			
tci-StateId	1	TCI.State.3	
qcl-Type1 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	7	TRS.2.2 TDD Resource #4 Note1	
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	7	TRS.2.2 TDD Resource #4 Note1	
}			
qcl-Type	typeD		
}			
}			
}			
Note 1: Both TRS.2.1 TDD and TRS.2.2 TDD are configured on the UE. The assumption to configure this field is that nzp-CSI-RS-ResourceId indices are configured in the following order: TRS.2.1 TDD = {0,1,2,3}, TRS.2.2 TDD = {4,5,6,7}, so resource #4 for each set corresponds to index 3 and 7, accordingly.			

7.5.8.4.5 Test requirement

Tables 7.5.8.4.4.1-3, 7.5.8.4.5-1 and 7.5.8.4.5-2 define the primary level settings including test tolerances for NR SA PCell FR2 DCI based active TCI state switch with m-DCI for simultaneous reception.

Table 7.5.8.4.5-1: NR Cell specific test parameters for NR SA FR2 PCell DCI based active TCI state switch with m-DCI for simultaneous reception

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI. State.2
TCI State 1		TCI.State.3
TCI State 2		TCI. State.2
TCI State 3		TCI.State.3
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD

Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [40].		

Table 7.5.8.4.5-2: OTA related test parameter for NR SA FR2 PCell DCI based active TCI state switch with m-DCI for simult aneous reception

Parameter	Unit	Cell 1							
		SSB0		SSB1		SSB2		SSB3	
		T1	T2	T1	T2	T1	T2	T1	T2
Angle of arrival configuration		Setup 6 according to clause A.9.6							
		AoA1		AoA2		AoA3		AoA1	
Assumption for UE beams Note 6		Rough							
$\hat{E}_s$	dBm/SCS	-80.6+TT	-80.6+TT	-80.6+TT	-80.6+TT	-80.6+TT	-80.6+TT	-85.60+TT	-85.60+TT
SS B_RP Note 2	dBm/ SCS	-80.6+TT	-80.6+TT	-80.6+TT	-80.6+TT	-80.6+TT	-80.6+TT	-85.60+TT	-85.60+TT
$\hat{E}_s/I_{otBB}$ Note 7	dB	8.3+TT	8.3+TT	8.3+TT	8.3+TT	8.3+TT	8.3+TT	7.63+TT	7.63+TT
Io Note2	dBm/95.04 MHz Note4	-55.41+TT	-55.41+TT	-55.41+TT	-55.41+TT	-55.41+TT	-55.41+TT	-60.41+TT	-60.41+TT
Time offset (t)	us	0	0	0	0	0	0	.35	.35

NOTE 1: Void
NOTE 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: Void
NOTE 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
NOTE 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.
NOTE 6: Information about types of UE beam is given in clause B.2.1.3 and does not limit UE implementation or test system implementation.
NOTE 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1 dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
NOTE 8: Three probes are used to test dual to dual TCI state switch. One probe shall be used to emulate two different SSBs i.e. SSB0 and SSB3. SSB3 is transmitted with same AoA as SSB0 with a time offset (x) and a different power from SSB0.

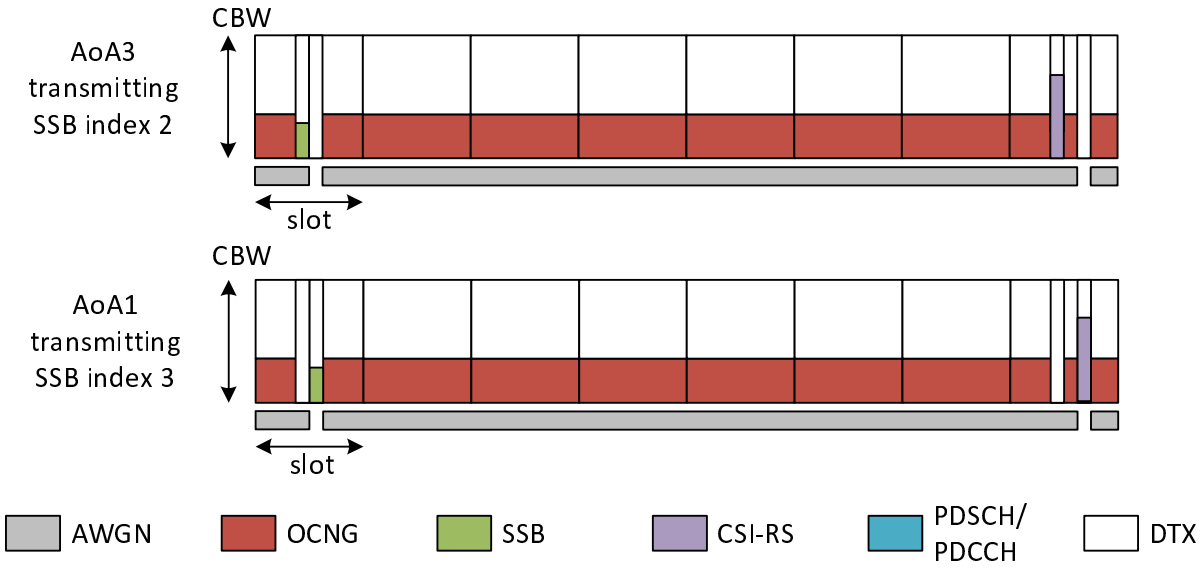

Figure 7.5.8.4.5-1: Time multiplexed downlink transmissions during T1

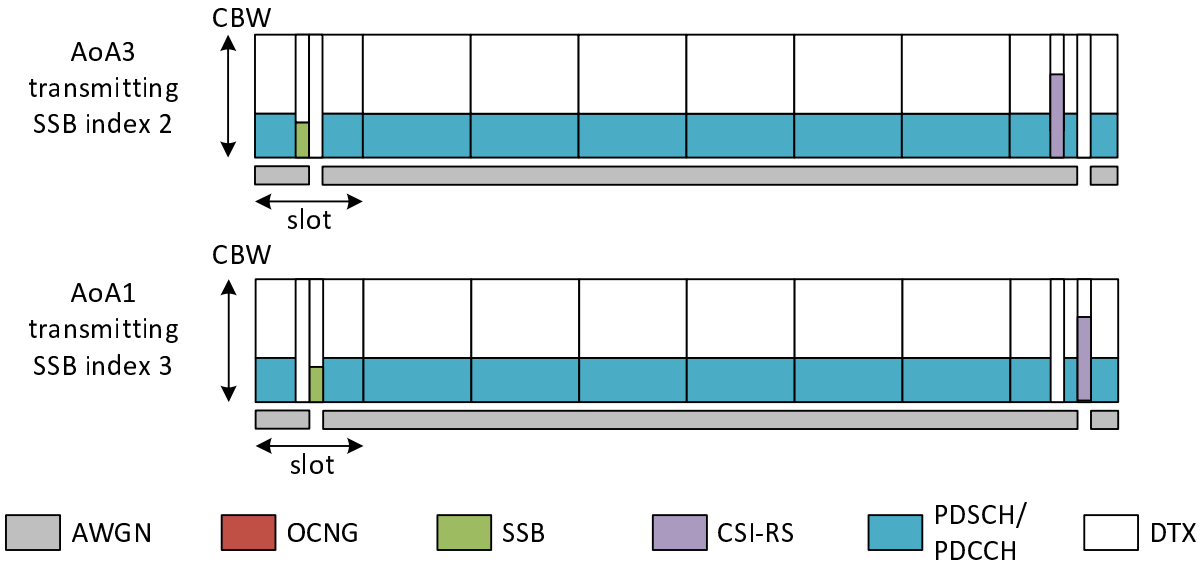

Figure 7.5.8.4.5-2: Time multiplexed downlink transmissions during T2

After receiving two DCIs in slot n and slot n+1 during T2, UE shall:

- be able to start receiving on TCI state 3 and TCI state 4 simultaneously after slot n + *timeDurationForQCL*

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.8.5 NR SA FR2 Single-DCI based active TCI state switch with known target TCI states for simultaneous reception

Editor's note: This test case is incomplete. The following aspect is either missing or TBD:

- Test tolerance analysis and measurement uncertainty are missing

- Test procedure is subject to change- Configuration of 3AoA setup and testability of the device is still FFS

7.5.8.5.1 Test Purpose

The purpose of this test is to verify the DCI based active TCI state switch delay requirement specified in clause 7.5.8.0.6.

7.5.8.5.2 Test Applicability

This test applies to all types of NR UE release 18 onwards supporting SA FR2, more than one TCI state configuration, more than one simultaneously trackable TRS resource set, group based L1-RSRP reporting enhancements, single DCI based spatial division multiplexing scheme and simultaneous reception with different QCL Type D reference signal.

7.5.8.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.8.0.6.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.8.5.

7.5.8.5.4 Test description

7.5.8.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.8.5.4.1-1.

Table 7.5.8.5.4.1-1: Supported test configurations for NR SA FR2 PCell Single-DCI based active TCI state switch with known target TCI states for simultaneous reception

Config	Description
7.5.8.5-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.8.5.4.1-2.

Table 7.5.8.5.4.1-2: Initial conditions for NR SA PCell FR2 Single-DCI based active TCI state switch with known target TCI states for simultaneous reception

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.8.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.5.8.5.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 7.5.8.5.4.1-3.

Table 7.5.8.5.4.1-3: General test parameters for NR SA FR2 PCell Single-DCI based active TCI state switch with known target TCI states for simultaneous reception

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	2	

7.5.8.5.4.2 Test procedure

The test scenario comprises of one NR PCell (Cell 1) as given in Table 7.5.8.5.4.1-3. Cell-specific parameters of NR PCell are specified in Table 7.5.8.5.5-1. The OTA related test parameters for FR2 are shown in Table 7.5.8.5.5-2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with groupBasedBeamReporting-r17 for SSB index 0 and SSB index 1
- UE is configured with 3 different TCI states for PCell in Cell 1 before starting the test:
  - PDCCH TCI state 0 (QCL'd to SSB0),
  - PDSCH TCI state 0 (QCL'd to SSB0),
  - PDSCH TCI state 1 (QCL'd to SSB1)
- UE is indicated TCI state 0 as the active PDCCH and PDSCH TCI state at the beginning of the test.
  - TCI state 1, which is one of the target TCI states, is not in the active TCI state list.

The test consists of two time periods, T1 and T2.

During T1, only SSBs to which PDCCH TCI state 0 and PDSCH TCI state 0 are QCL'd is transmitted (SSB0). During T1, SSB0 is transmitted on AoA1.

At the beginning of T2, the SSB corresponding to PDSCH TCI state 1 starts transmitting on AoA2. The UE is configured with groupBasedBeamReporting-r17 to provide periodic group-based L1-RSRP reports for SSB0 and SSB1. In slot n, which is within 1280 ms of UE providing group-based L1-RSRP report with results for SSB0 and SSB1 as a beam pair, UE receives a MAC-CE command indicating activation of TCI state 0 and TCI state 1 in a single codepoint. Tci-PresentInDCI is configured as enabled in the PDSCH configuration.

After a time that equals to the active TCI state list update delay for sDCI, UE receives a DCI indicating TCI state 0 and TCI state 1 for PDSCH scheduling. The TE verifies that the UE can start receiving PDSCH with TCI state 0 (in AoA1) and TCI state 1 (in AoA2) simultaneously after timeDurationForQCL from receiving the DCI.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.8.5.5-1. Propagation conditions are set according to clause C.2.3.
3. The SS transmits an RRCReconfiguration message to configure 3 different TCI states for Cell 1, PDCCH TCI state 0 (QCL'd to SSB0), PDSCH TCI state 0 (QCL'd to SSB0), and PDSCH TCI state 1 (QCL'd to SSB1), as indicated in clause 7.5.8.5.4.3. This message also configures tci-PresentInDCI in the PDSCH configuration. In this message the UE is also configured with groupBasedBeamReporting-r17 for SSB index 0 and SSB index 1.
4. The UE transmits an RRCReconfigurationComplete message.
5. The SS shall send a MAC-CE to the UE indicating TCI state 0 as the active PDCCH TCI state. The SS shall continuously transmit PDCCHs to the UE indicating new transmissions on PCell to ensure that the UE is transmitting the corresponding ACK/NACK feedback.
6. T1 starts. During T1 only SSBs to which PDCCH TCI state 0 and PDSCH TCI state 0 are QCL'd is transmitted (SSB0). During T1, SSB0 is transmitted on AoA1.
7. The start of T2 is the instant when the last TTI containing the RRCReconfiguration message is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 7.5.8.5.5-2 and, SSB1 corresponding to PDSCH TCI state 1 starts transmitting, on AoA2. The SS transmits an RRCReconfiguration message to configure groupBasedBeamReporting-r17 to provide periodic group-based L1-RSRP reports for SSB0 and SSB1 in clause 7.5.8.5.4.3. T2 starts.

8. The SS sends, in slot n, DCI based PDSCH TCI state switch on CORESETPoolIndex 0 for indicating the TCI state switch of PDSCH to TCI state 3. Slot n is within 1280ms of UE providing group-based L1-RSRP report with results for SSB0 and SSB1 as a beam pair.

9. During T2, if the SS receives ACK/NACK on TCI-state 0 and TCI-state1 corresponding to the next scheduled DL simultaneously after timeDurationForQCL from UE receiving the DCI , the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.

10. When T2 expires the SS shall sends a MAC-CE to indicate switch to TCI-state 0.

11. Wait 1s for the UE to switch TCI-state 0. If the SS receives ACK/NACK corresponding to PDSCH transmissions scheduled on TCI-state 0 continue to step 12. Otherwise switch the UE off and on and continue to step 1.

12. Repeat steps 2-11 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.8.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.8.5.4.3-1: Common Exception messages for NR SA FR2 PCell Single-DCI based active TCI state switch with known target TCI states for simultaneous reception

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.6-2 with conditions PERIODIC and SS-RSRP and groupBasedBeamReporting enabled Table H.3.6-3 with condition SSB

Table 7.5.8.5.4.3-2: ControlResourceSet for NR SA FR2 PCell Single-DCI based active TCI state switch with known target TCI states for simultaneous reception

Derivation Path: TS 38.508-1 [14], Table 4.6.3-28			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
tci-StatesPDCCH-ToAddList SEQUENCE(SIZE (1..maxNrofTCI-StatesPDCCH)) OF {	2 entries		
TCI-StateId[0]	0	TCI.State.2	
TCI-StateId[1]	1	TCI.State.3	
}			
tci-PresentInDCI	Present		
}			

Table 7.5.8.5.4.3-3: PDSCH-Config for NR SA FR2 PCell Single-DCI based active TCI state switch with known target TCI states for simultaneous reception

Derivation Path: TS 38.508-1 [14], Table 4.6.3-100			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-Config ::= SEQUENCE {			
tci-StatesToAddModList SEQUENCE(SIZE (1.. maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State[0]	TCI.State.2	TCI-StateId 2	
TCI-State[1]	TCI.State.3	TCI-StateId 3	
}			
}			

Table 7.5.8.5.4.3-4: TCI-State for NR SA FR2 PCell Single-DCI based active TCI state switch with known target TCI states for simultaneous reception

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190

Information Element	Value/remark	Comment	Condition
TCI-State ::= SEQUENCE {	2 entries		
{			
tci-StateId	0	TCI.State.2	
qcl-Type1 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	3	TRS.2.1 TDD Resource #4 Note1	
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	3	TRS.2.1 TDD Resource #4 Note1	
}			
qcl-Type	typeD		
}			
},			
{			
tci-StateId	1	TCI.State.3	
qcl-Type1 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	7	TRS.2.2 TDD Resource #4 Note1	
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
bwp-Id	1		
referenceSignal CHOICE {			
csi-rs	7	TRS.2.2 TDD Resource #4 Note1	
}			
qcl-Type	typeD		
}			
}			
}			
Note 1: Both TRS.2.1 TDD and TRS.2.2 TDD are configured on the UE. The assumption to configure this field is that nzp-CSI-RS-ResourceId indices are configured in the following order: TRS.2.1 TDD = {0,1,2,3}, TRS.2.2 TDD = {4,5,6,7}, so resource #4 for each set corresponds to index 3 and 7, accordingly.			

7.5.8.5.5 Test requirement

Tables 7.5.8.5.4.1-3, 7.5.8.5.5-1 and 7.5.8.5.5-2 define the primary level settings including test tolerances for NR SA PCell FR2 Single-DCI FR2 DCI based active TCI state switch with known target TCI states for simultaneous reception

Table 7.5.8.5.5-1: NR Cell specific test parameters for NR SA FR2 PCell Single-DCI based active TCI state switch with known target TCI states for simultaneous reception

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2

SMTC Configuration		SMTC.1
TCI State 0		TCI. State.2
TCI State 1		TCI.State.3
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 7.5.8.5.5-2: OTA related test parameter for NR SA FR2 PCell Single-DCI based active TCI state switch with known target TCI states for simultaneous reception

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup according to A.9.5			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{otBB}$ Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-55.41	-55.41	- Infinity	-55.41

Note 1: Void
Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

7.5.9 Uplink spatial relation switch delay

7.5.9.0 Minimum conformance requirements

7.5.9.0.1 Minimum conformance requirements for MAC-CE based uplink spatial relation switch delay

[TS38.133, Clause 8.12.3]

If the target spatial relation associated to DL RS is known, upon receiving PDSCH carrying MAC-CE activation command in slot n, for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial

relation in the slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ 1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1 where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213.

If the target spatial relation associated to DL RS is unknown, upon receiving PDSCH carrying MAC-CE activation command in slot n, for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation in the slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ $T_{L1\text{-}RSRP}$+1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213,
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as
  - $T_{L1\text{-}RSPR_Measurement_Period_SSB}$ for SSB as specified in clause 9.5.4.1,
    - with the assumption of M=1
    - with T_{Report} = 0
  - $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for CSI-RS as specified in clause 9.5.4.2
    - configured with higher layer parameter *repetition* set to ON
    - with the assumption of M=1 for periodic CSI-RS
    - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
    - with $_{T}$Report = 0

The UE shall be able to transmit with the old UL spatial relation until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$.

When the UL spatial relation info switch for PUCCH changes both the associated DL RS and *pucch-PathlossReferenceRS* with the same MAC-CE activation, and if both the DL RS and *pucch-PathlossReferenceRS* are known as specified in clause 8.12.2 and 8.14.2 respectively, the UE shall be able to transmit PUCCH with the target UL spatial relation after the delay specified in clause 8.14.3. If either the associated DL RS or *pucch-PathlossReferenceRS* are unknown, a longer switching delay is allowed. The UE is not required to transmit PUCCH with the target UL spatial relation until the DL RS and pathloss reference RS switch are completed.

7.5.9.0.2 Minimum conformance requirements for RRC based uplink spatial relation switch delay

[TS38.133, Clause 8.12.5]

If the target spatial relation associated to DL RS is known, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured in the slot n+ $T_{RRC_processing}$ */NR slot length* +1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in 36.331 is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331.

If the target spatial relation associated to DL RS is unknown, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured in the slot n+ $T_{RRC_processing}$ */NR slot length* + $T_{L1\text{-}RSRP}$ +1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in 36.331 is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331.

- $T_{L1\text{-}RSRP}$ is defined in clause 8.12.3.

7.5.9.1 MAC-CE based uplink spatial relation switch

7.5.9.1.1 NR PCell FR2 spatial relation associated with known DL-RS

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing.

7.5.9.1.1.1 Test purpose

The purpose of this test is to verify the uplink spatial relation switch delay requirement defined in TS 38.133 [6] clause 8.12.3 by a UE capable of beam correspondence without the need for UL beam sweeping.

7.5.9.1.1.2 Test applicability

This test applies to all types of UE Rel-16 and forward supporting NR SA with PCell in FR2.

7.5.9.1.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.5.9.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.9.1.

7.5.9.1.1.4 Test description

There is only one cell configured in this test: NR PCell (Cell 1). This test consists of two successive time periods, with time duration of T1 and T2 respectively.

7.5.9.1.1.4.1 Initial conditions

This test shall be tested using the test configuration in Table 7.5.9.1.1.4.1-1.

Table 7.5.9.1.1.4.1-1: Supported test configurations

Config	Description
7.5.9.1.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.9.1.1.4.1-2.

Table 7.5.9.1.1.4.1-2: Initial conditions for NR SA PCell FR2 uplink spatial relation switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.9.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.9.1.1.4.1-3.
2. Message contents are defined in clause 7.5.9.1.1.4.3.
3. There is only one NR cell specified in the test. NR Cell 1 power level is set according to clause C.1.1 and C.1.2 for this test.

Table 7.5.9.1.1.4.1-3: General test parameters for spatial relation switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test

Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	[0.2]	
T2	s	[2]	

7.5.9.1.1.4.2 Test procedure

During the test PDCCH indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have continuous ACK/NACK sending by PUCCH.

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR PCell. The UE is configured with a single TCI state, TCI State-0, which is QCL'd with SSB0. The UE shall be configured with 2 different spatial relations: PUCCH Spatial Relation Info-0 (QCL'd to SSB0) and Spatial Relation Info-1 (QCL'd to SSB1), before starting the test. The UE is indicated via MAC-CE activation of *PUCCH-SpatialRelationInfoId* corresponding to Spatial Relation Info-0.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.9.1.1.5-1. Propagation conditions are set according to clause C.2.2. T1 starts. During T1 only SSB0 associated with PDCCH TCI state-0 and PUCCH Spatial Relation Info-0 is transmitted.
3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.9.1.1.5-2. T2 starts. At the beginning of T2, the SSB1 associated with PUCCH Spatial Relation Info-1 starts transmitting.
4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.
5. The UE transmits an *RRCReconfigurationComplete* message.
6. The SS sends a MAC-CE to indicate switch to spatial relation to PUCCH Spatial Relation Info 1 in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.
7. If the SS:
   a) Receives ACK/NACK on each UL transmission occasion scheduled on Spatial Relation Info 0 until slot *n* + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$, and
   b) Receives ACK/NACK on each UL transmission occasion scheduled on Spatial Relation Info 1 on and after slot *n* + T_{HARQ}/NR slot length + $3N_{slot}^{subframe,\mu}$ + 1.

   the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.
8. When T2 expires the SS shall sends a MAC-CE to indicate switch to Spatial Relation Info 0.
9. Wait 1s for the UE to switch to Spatial Relation Info 0. If the SS receives ACK/NACK on each UL transmission occasion scheduled on Spatial Relation Info 0, continue to step 11. Otherwise continue to step 10.
10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.9.1.1.4.3 Message contents

TBD

7.5.9.1.1.5 Test requirement

Table 7.5.9.1.1.5-1 and 7.5.9.1.1.5-2 define the primary level settings including test tolerances for all tests.

Table 7.5.9.1.1.5-1: NR Cell specific test parameters for spatial relation switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State-0 Configuration		TCI.State.0
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Spatial Relation Info-0 Configuration		PUCCH.SRI.0
Spatial Relation Info-1 Configuration		PUCCH.SRI.1
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 7.5.9.1.1.5-2: OTA related test parameters for uplink spatial relation switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
N_{oc} Note 1	dBm/15 kHz	-92.1			
N_{oc} Note 1	dBm/SCS	-83.1			
$\hat{E}_s/N_{oc}$	dB	1		-infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1		-infinity	-82.1
Io Note2	dBm/95.04 MHz Note4	-50.6		-54.1	-50.6

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6] and does not limit UE implementation or test system implementation.

During T2, the UE shall send L1-RSRP report with results for SSB0 and SSB1.

After receiving MAC-CE command in slot *n*, the UE shall:

- Continue transmitting using PUCCH spatial relation associated with SSB0 up to and including slot $n + T_{HARQ}$/NR slot length + $3N_{slot}^{subframe,\mu}$
- Start transmitting using PUCCH spatial relation associated with SSB1 from slot $n + T_{HARQ}$/NR slot length + $3N_{slot}^{subframe,\mu} + 1$ and onwards.

The rate of correct events observed during repeated tests shall be at least [90]%.

7.5.9.2 RRC based uplink spatial relation switch

7.5.9.2.1 NR PCell FR2 spatial relation switch associated with a known DL-RS

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing.

7.5.9.2.1.1 Test purpose

The purpose of this test is to verify the RRC based uplink spatial relation switch delay requirement defined in TS 38.133 [6] clause 8.12.5 by a UE capable of beam correspondence without the need for UL beam sweeping.

7.5.9.2.1.2 Test applicability

This test applies to all types of UE Rel-16 and forward supporting NR SA with PCell in FR2.

7.5.9.2.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.5.9.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.9.2.

7.5.9.2.1.4 Test description

There is only one cell configured in this test: NR PCell (Cell 1). This test consists of two successive time periods, with time duration of T1 and T2 respectively.

7.5.9.2.1.4.1 Initial conditions

This test shall be tested using the test configuration in Table 7.5.9.2.1.4.1-1.

Table 7.5.9.2.1.4.1-1: Supported test configurations

Config	Description
7.5.9.2.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.9.2.1.4.1-2.

Table 7.5.9.2.1.4.1-2: Initial conditions for NR SA PCell FR2 uplink spatial relation switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.9.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.9.2.1.4.1-3.
2. Message contents are defined in clause 7.5.9.2.1.4.3.
3. There is only one NR cell specified in the test. NR Cell 1 power level is set according to clause C.1.1 and C.1.2 for this test.

Table 7.5.9.2.1.4.1-3: General test parameters for spatial relation switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
timeRestrictionForChannelMeasurements		configured	Time domain measurement restriction for the channel (signal) measurements (see TS 38.214 [19], clause 5.2.1.1)
T1	s	0.5	
T2	s	1.5	

7.5.9.2.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR PCell. The UE is configured with 1 SRS-SpatialRelation0 associated with SSB0. UE is indicated SRS-SpatialRelation0 associated with SSB0.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
2. Set the parameters of NR Cell 1 according to T1 in Table 7.5.9.2.1.5-1. Propagation conditions are set according to clause C.2.2. T1 starts. During T1 only SSB0 associated with SRS-SpatialRelation0 is transmitted.
3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.9.2.1.5-2. T2 starts. At the beginning of T2, the SSB1 associated with PUCCH Spatial Relation Info-1 starts transmitting.
4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.
5. The UE transmits an *RRCReconfigurationComplete* message.
6. The SS sends a RRC to indicate switch to periodic SRS with target SRS-SpatialRelation1 in slot n which is within [1280]ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.
7. If the SS:
   a) Receives periodic SRS with target spatial relation (SRS-SpatialRelation0) on PCell until n + $T_{RRC_processing}$/NR slot length, and

b) Receives periodic SRS with target spatial relation (SRS-SpatialRelation1) on PCell on and after n + $T_{RRC_processing}$/NR slot length + 1.

the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.

8. When T2 expires the SS shall sends a RRC to indicate switch to SRS-SpatialRelation0.

9. Wait 1s for the UE to switch to SRS-SpatialRelation0. If the SS receives SRS with target spatial relation (SRS-SpatialRelation0), continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG* and *SCG*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.9.2.1.4.3 Message contents

TBD

7.5.9.2.1.5 Test requirement

Table 7.5.9.2.1.5-1 and 7.5.9.2.1.5-2 define the primary level settings including test tolerances for all tests.

Table 7.5.9.2.1.5-1: NR Cell specific test parameters for spatial relation switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
SRS-SpatialRelation0		SRS.SRI0
SRS-SpatialRelation1		SRS.SRI1
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	160
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 7.5.9.2.1.5-2: OTA related test parameters for uplink spatial relation switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough		Rough	
N_{oc} Note 1	dBm/15 kHz	-92.1			
N_{oc} Note 1	dBm/SCS	-83.1			
$\hat{E}_s/N_{oc}$	dB	1	1	-Infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1	-82.1	-Infinity	-82.1
Io Note2,Note6	dBm/95.04 MHz Note4	-50.6	-50.6	-54.1	-50.6

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

During T1 UE shall send L1-RSRP report with SSB0 to which SRS-SpatialRelation0 is associated. During T2, UE shall send L1-RSRP report with SSB1 to which SRS-SpatialRelation1 is associated.

After receiving RRC command in slot n, UE shall be able to transmit target periodic SRS with SRS-SpatialRelation1 on the PCell in the slot n + $T_{RRC_processing}$/*NR slot length* + 1.

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.10 UE specific CBW change

7.5.10.0 Minimum conformance requirements

7.5.10.0.1 Minimum conformance requirements for NR FR2 UE specific CBW change of PCell with non-DRX in SA

[TS 38.133, Clause 8.13]

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on the DL BWP with BWP ID firstActiveDownlinkBWP-Id or transmit PUSCH on the UL BWP with BWP ID firstActiveUplinkBWP-Id of the new CBW right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in millisecond as defined in clause 11.2 in TS 36.331 [29] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in millisecond as defined in clause 12 in TS 38.331 [13], and

$T_{CBWchangeDelayRRC} = 6ms$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ on the cell where UE-specific CBW change occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

7.5.10.1 NR FR2 UE specific CBW change of PCell with non-DRX in SA

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing
- TT analysis is missing

7.5.10.1.1 Test purpose

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13 in TS 38.133 [6].

7.5.10.1.2 Test applicability

This test applies to all types of NR SA UE Rel-16 and forward. The requirements in this test apply for a UE which receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

7.5.10.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.5.10.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.10.1.

7.5.10.1.4 Test description

The test scenario comprises of one Cell, PCell (Cell 1), which has constant signal levels throughout the test. The test consists of 1 time period with duration of T1.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK transmission.

During T1 the SS sends an *RRCReconfiguration* message containing *SCS-SpecificCarrier* to reconfigure UE-specific CBW. The SS verifies the UE specific CBW switching delay in PCell by estimating the time from the moment the *RRCReconfiguration* message including updated UE-specific CBW configuration is sent to the moment a valid ACK/NACK is received.

7.5.10.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.10.1.4.1-1.

Table 7.5.10.1.4.1-1: UE specific CBW change supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.5.10.1.4.1-2.

Table 7.5.10.1.4.1-2: Initial conditions for EN-DC PSCell FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.10.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.10.1.4.1-3. Cell-specific parameters of NR PCell are specified in Table 7.5.10.1.5-1.

2. Message contents are defined in clause 7.5.10.1.4.3.

3. There is one NR cell specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 7.5.10.1.4.1-3: General test parameters for UE specific CBW change in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
T1	s	0.2	

7.5.10.1.4.2 Test procedure

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On*, and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. UE is connected to Cell 1 (PCell) on radio channel 1 (PCC). UE has been configured via RRC-configuration (*SCS-SpecificCarrier* in TS 38.331 [13]) with UE specific CBW (CBW-1), initial BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP. Set the parameters according to Tables 7.5.10.1.4.1-3 and 7.5.10.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

2. The SS starts sending PDCCHs indicating new transmissions continuously on Cell 1.

3. The SS sends an *RRCReconfiguration* message containing *SCS-SpecificCarrier* with updated UE specific CBW (CBW-2), dedicated BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP.

4. T1 starts from the beginning of slot *i*, where slot *i* is the last slot carrying the PDSCH containing the *RRCReconfiguration* message in step 3.

5. The UE shall reconfigure its CBW with the updated CBW of final condition (CBW-2).

6. The SS verifies the UE specific CBW change time in PCell by counting the time from the time when the RRC Reconfiguration message including updated CBW configuration is sent till the time when RRC Reconfiguration Complete message is received.

7. If the UE starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. If it is successful, continue to step 10. Otherwise continue to step 9.

9. Switch the UE OFF and then ON. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On*, and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4.

10. Repeat steps 2-9 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.10.1.4.3 Message contents

TBD

7.5.10.1.5 Test requirement

Table 7.5.10.1.5-1 defines the NR cell specific test parameters. Table 7.5.10.1.5-2 defines OTA related test parameters, not including test tolerances yet.

Editor's note: will be updated after the TT analysis.

7.5.10.1.5-1: NR Cell specific test parameters for UE specific CBW change in NR SA

Parameter		Unit	Cell 1
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66
Active DL BWP ID			0
Initial DL BWP Configuration (BWP-1)			DLBWP.0.2
Initial UL BWP Configuration (BWP-1)			ULBWP.0.2
Initial Condition	Active DL CBW Configuration (CBW-1)		DLCBW.1.1
	Active UL CBW Configuration (CBW-1)		ULCBW.1.1
Final Condition	Active DL CBW Configuration (CBW-2)		DLCBW.1.2
	Active UL CBW Configuration (CBW-2)		ULCBW.1.2
'PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled. Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table 7.5.10.1.5-2: OTA related test parameters for UE specific CBW change test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15 in TS 38.133 [6]
Assumption for UE beams Note 5			Fine
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-112 + TT
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-103 + TT
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		

	NR_TDD_FR2_Y		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note3	-85 + TT
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18 + TT
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-56 + TT
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.			
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.			

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot i+$\frac{T_{\text{RRCprocessingDelay}}+T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i+$\frac{T_{\text{RRCprocessingDelay}}+T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in TS 38.321 [12].

All of the above test requirements shall be fulfilled in order for the observed PCell UE specific CBW change delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.11 UE UL carrier RRC reconfiguration delay

7.5.11.1 UE UL carrier RRC reconfiguration delay

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- Normal conditions

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test is incomplete for extreme conditions

7.5.11.1.1 Test purpose

The purpose of this test is to verify that when the UE receives a RRC message implying NR UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within the time limits specified in TS 38.133 [6] clause 8.4.2 and 8.4.3 for configuring and deconfiguring, respectively. The test will also verify the interruption at UL carrier configuration requirements on PCell in TS 38.133 [6] clause 8.2.2.2.4.

7.5.11.1.2 Test applicability

This test applies to all types of NR UE release 17 onwards supporting 5GS NR SA FR2.

7.5.11.1.3 Minimum conformance requirements

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.11.1.

7.5.11.1.3.1 UE UL carrier configuration delay requirement

When the UE receives a RRC message implying NR UL or supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within $T_{UL_carrier_config}$ from the end of slot n.

Where

- Slot n is the last slot overlapping with the PDSCH containing the RRC command.
- $T_{UL_carrier_config}$ equals the maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [29] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it equals the maximum RRC procedure delay defined in clause 12 in TS 38.331 [13].

7.5.11.1.3.2 UE carrier deconfiguration delay requirement

When the UE receives a RRC message implying NR UL or supplementary UL carrier deconfiguration RRC signalling, the UE shall stop UL signalling on the deconfigured UL carrier within $T_{UL_carrier_deconfig}$ from the end of slot n.

Where

- Slot n is the last slot overlapping with the PDSCH containing the RRC command.
- $T_{UL_carrier_deconfig}$ equals the maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [29] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it equals the maximum RRC procedure delay defined in clause 12 in TS 38.331 [13].

7.5.11.1.4 Test description

7.5.11.1.4.1 Initial conditions

There are two cells: FR2 PCell (Cell 1) on NR RF channel 1 and FR2 SCell (Cell 2) on NR RF channel 2. NR uplink is broadcast by *ServingCellConfigCommonSIB.* The test parameters for PCell and SCell are given in Table 7.5.11.4.1-1, Table 7.5.11.4.1-2 and Table 7.5.11.4.1-3. The test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, NR uplink of Cell 2 is not configured to UE. At the start of T2, a NR uplink of Cell 2 is configured to UE through *RRCReconfiguration*, then UE shall start transmission on the NR uplink of Cell 2. At the start of T3, the NR uplink is released through *RRCReconfiguration*.

The test equipment also verifies that potential interruption of PCell due to UL carrier configuration on SCell is carried out within the correct time span and within the correct length by monitoring ACK/NACK sent in PCell.

Table 7.5.11.1.4.1-1: Supported test configurations

Configuration	PCell (Cell 1)	SCell (Cell 2)
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	DL and UL: 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table 7.5.11.1.4.1-2: Initial conditions for SA UE uplink RRC reconfiguration delay for FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.11.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.3	

Exceptions to connection diagram	N/A	

Table 7.5.11.1.4.1-3: General test parameters for SA UE UL carrier RRC reconfiguration Delay for FR2

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two NR RF channels
Active cell		Config 1	Cell 1: FR2 PCell Cell 2: FR2 SCell	PCell on RF channel number 1 FR2 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
Cell 2 timing offset to Cell 1	μs	Config 1	3	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5	
T3	s	Config 1	5	

7.5.11.1.4.2 Test procedure

Test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. There are two cells: FR2 PCell (Cell 1) on NR RF channel 1 and FR2 SCell (Cell 2) on NR RF channel 2. NR uplink is broadcast by *ServingCellConfigCommonSIB.*

1. Ensure the UE is in RRC_CONNECTED state with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

2. Set the parameter for PCell and SCell according to the table 7.5.11.1.4.1-1, 7.5.11.1.4.1-2 and 7.5.11.1.4.1-3.

3. T1 starts. At this moment NR uplink of Cell 2 is not configured to UE.

4. When T1 expires the SS shall initiates the *RRCReconfiguration* procedure to UE to configure the NR UL of Cell2. T2 starts.

5. The UE:

a) Starts transmission on the NR uplink carrier on SCell within 20ms from the start of T2.

and

b) Interruption of PCell due to UL carrier configuration shall not happen outside the UL carrier configuration delay which is 20ms in this test, and the length of interruption (0.125 ms after the start of T2) shall not exceed the length specified in clause TS 38.133 [6] 8.2.2.2.4.

6. When T2 expires the SS initiates *RRCReconfiguration* procedure to UE to release the NR UL of Cell2.

7. The UE:

   a) Stop the transmission on the NR uplink carrier on SCell within 20ms from the start of T3.

and

   b) Interruption of PCell due to UL carrier de-configuration shall not happen outside the UL carrier de-configuration delay which is 20ms in this test, and the length of interruption (0.125 ms after the start of T2) shall not exceed the length specified in clause TS 38.133 [6] 8.2.2.2.4.

8. Repeat step 2-7 until a test verdict has been achieved.
   The UL carrier configuration delay along with length of PCell interruption and UL carrier de-configuration delay along with length of PCell interruption is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G

clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

7.5.11.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3.

7.5.11.1.5 Test requirement

The UE shall be ready to start transmission on the NR uplink carrier on SCell within 20ms from the start of T2.

The UE shall stop the transmission on the NR uplink carrier on SCell within 20ms from the start of T3.

During T2 and T3, the start of interruption of PCell due to UL carrier configuration or de-configuration on SCell shall not happen outside the UL carrier configuration delay which is 20ms in this test, and the length of interruption shall not exceed the length specified in 38.133 [6] clause 8.2.2.2.4.

All of the above test requirements shall be fulfilled in order for the observed UE UL carrier configuration delay and UE UL carrier release delay to be counted as correct. The rate of correct observed UE UL carrier configuration delay and UE UL carrier release delay during repeated tests shall be at least 90%.

Table 7.5.11.1.5-1: NR Cell specific test parameters for SA UE UL carrier RRC reconfiguration Delay for FR2

Parameter		Unit	Test configuration	Cell 1			Cell 2		
				T1	T2	T3	T1	T2	T3
AoA setup			Config 1	Setup 1 as specified in clause A.9					
Beam Assumption[Note 7]			Config 1	Rough			Rough		
Frequency Range			Config 1	FR2			FR2		
NR RF Channel Number			Config 1	1			2		
Duplex mode			Config 1	TDD			TDD		
TDD configuration			Config 1	TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated			Config 1	66			66		
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1			DLBWP.0.1		
	Initial UL BWP			ULBWP.0.1			ULBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1			DLBWP.1.1		
	Dedicated UL BWP			ULBWP.1.1			ULBWP.1.1		
OCNG Patterns			Config 1	OP.1			OP.1		
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD			SR.3.1 TDD		
CORESET Reference Channel			Config 1	CR.3.1 TDD			CR.3.1 TDD		
SSB configuration			Config 1	SSB.1 FR2			SSB.1 FR2		
SMTC configuration			Config 1	SMTC.1			SMTC.1		
TRS configuration			Config 1	TRS.2.1 TDD			TRS.2.1 TDD		
TCI state			Config 1	TCI.State.0			TCI.State.0		
PUSCH parameters for NR UL carrier			Config 1	N/A			N/A	G-FR2-A3-4 in [28]	N/A
PUCCH parameters for NR UL carriers			Config 1	N/A			N/A	Table 11.3.2.3.1.2-2 in [28]	N/A
EPRE ratio of PSS to SSS			Config 1	0			0		
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									

EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz Note5	Config 1	-104.7	-104.7
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7	-95.7
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-88.7	-88.7
$\hat{E}_s / I_{ot}$	dB	Config 1	7	7
$\hat{E}_s / N_{oc}$	dB	Config 1	7	7
Io Note3	dBm/95.04 MHz Note5	Config 1	-58.92	-58.92
Propagation Condition		Config 1	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3 [6], and does not limit UE implementation or test system implementation

7.5.12 Conditional PSCell addition and release delay (FR2 SA)

7.5.12.1 NR SA FR2 Addition and Release Delay of PSCell

Editor's Note: This test case is incomplete in following aspects:

- This test case is incomplete for Test frequency f > 40.8 GHz
- This test case is incomplete for UE power class other than PC3.

7.5.12.1.1 Test purpose

The purpose of this test is to verify that the conditional PSCell addition and release delays under SA are within the requirements.

7.5.12.1.2 Test applicability

This test applies to all types of NR UE supporting NR-DC from Release 17 onwards and supporting Conditional PSCell addition.

7.5.12.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 4.5.11.0.

The normative reference for this requirement is TS 38.133 [6] clause 8.9A.2.

7.5.12.1.4 Test description

7.5.12.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.12.1.4.1-1.

Table 7.5.12.1.4.1-1: Supported test configurations for FR2 PSCell

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
2	FR1 TDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.5.12.1.4.1-2

Table 7.5.12.1.4.1-2: Initial conditions for NR SA FR2 Addition and Release Delay of PSCell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.12.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 7.5.12.1.4.1-3: General Test Parameters for Conditional PSCell Addition and Release delay

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test
Active PCell			Cell 1	PCell on RF channel number 1 in FR1
Neighbour cell			Cell 2	Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2
A4	Hysteresis	dB	0	Hysteresis for event A4
	Threshold RSRP	dBm	-118	Threshold for event A4
	Time to Trigger	S	0	Time to trigger for event A4
DRX			OFF	For both PCell and PSCell once activated
Measurement gap pattern ID			0	Gaps are configured before T2 and released before T3.
PRACH configuration in Cell 2			FR2 PRACH configuration 2	PRACH configuration as specified in Clause A.3.8.3.2.
CSI reporting periodicity and offset configuration for Cell 2		ms	2	
T1		s	5	During this time the PCell is known and Cell 2 is unknown.
T2		s	≤7	During this time Cell 2 meets the addition condition and UE adds this PSCell.
T3		s	1	During this time the UE sends CSI reports for Cell 2.
T4		s	1	During this time the UE releases the Cell 2.

1. The test parameters are given in Table 7.5.12.1.4.1-3.
2. Message contents are defined in clause 7.5.12.1.4.3.
3. There are two NR cells specified in the test. Cell 1 is the PCell on one NR FR1 carrier and Cell 2 is the PSCell on the other NR FR2 carrier. Cell 1 and Cell 2 shall be initially configured according to Annex C.

7.5.12.1.4.2 Test procedure

The test consists of four successive time periods, with time durations of T1, T2, T3, T4, respectively.

At the start of time duration T1, the UE does not have any timing information of cell 2. NR shall configure a condition implying addition to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2.

At the start of T2, cell 2 becomes detectable and meets the addition condition. Reception by the test system of the PRACH preamble defines the start of T3.

During T3, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send an RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T4.

During T4, the UE shall release the PSCell.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall set the parameters according to Table 7.5.12.1.5-1 as appropriate. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message with condition CPA according to TS 38.508-1 [14] Table 4.6.1-13 including *RRCReconfiguration** message and associated execution condition. The *RRCReconfiguration** message contains PSCell configuration in *RRCReconfiguration***. And measurement gap pattern #0 is configured for the UE.

4. The UE shall transmit an *RRCReconfigurationComplete* message. T1 expiring.

5. T2 starts. The execution condition of PSCell (Cell2) becomes satisfied, the UE applies *RRCReconfiguration** message corresponding to PSCell (Cell2), and sends an *RRCReconfigurationComplete** message with condition NR-DC and CPA, including NR *RRCReconfigurationComplete*** message for the selected candidate PSCell.

6. The UE shall send PRACH to PSCell no later than $T_{config_PSCell_Addition_Conditional}$ from the start of T2, otherwise increase the number of failed iterations by one, switch off the UE and continue with step 13.

7. The SS shall transmit an *RRCReconfiguration* message to release measurement gap. T3 starts.

8. The UE shall transmit an *RRCReconfigurationComplete* message.

9 During T3 the UE shall send at least one CSI report for PSCell with non-zero CQI index, otherwise increase the number of failed iterations by one, switch off the UE and continue to step 13.

10. The SS shall transmit *RRCReconfiguration* message according to TS 38.508-1 [14] TBD to release NR cell (PSCell) after the UE has send at least one CQI report with non-zero CQI index for PSCell (Cell 2).

11. The UE shall transmit an *RRCReconfigurationComplete* message. T4 starts.

12. The UE shall stop sending CSI reports for PSCell no later than 20ms from the start of T4, if so increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.

13. Set Cell 2 physical cell identity = [((current cell 2 physical cell identity + 1) mod 1008)] for next iteration of the test procedure loop.

14. If the UE is not switched off, the SS shall transmit an *RRCRelease* message to release the RRC connection then, the SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State RRC_CONNECTED with generic parameter Connectivity *NR*. If paging succeeds, go to step 16, otherwise switches off the UE.

15. Switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

16. Repeat step 2-15 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.12.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 7.5.12.1.4.3-1: Common Exception messages for Conditional PSCell addition for NR SA FR2

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition GAPNEEDED for step 3 Table H.3.1-6 with condition gapUE and Pattern #0

Table 7.5.12.1.4.3-2: MeasConfig-DEFAULT: Configuration of NR measurement (step 3)

Derivation path: Table H.3.1-2 with Condition INTER-FREQ and GAP NEEDED			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfigId[1]	ReportConfigId		
reportConfig[1] CHOICE {			
reportConfigNR	ReportConfigNR-condEventA4	Table 7.5.12.1.4.3-3	
}			
}			
}			

Table 7.5.12.1.4.3-3: reportConfigNR-condEventA4 (Table 7.5.12.1.4.3-2)

Derivation Path: TS 38.508-1 [4] Table 4.6.3-142			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
ReportType CHOICE {			
condTriggerConfig-r16 SEQUENCE {			
condEventId CHOICE {			
condEventA4-r17 SEQUENCE {			
a4-Threshold-r17 CHOICE {			
rsrp	39		
}			
hysteresis-r17	0		
timeToTrigger-r17	ms0		
}			
}			
}			
}			
}			

7.5.12.1.5 Test requirement

Table 7.5.12.1.5-1 and Table 7.5.12.1.5-2 define the primary level settings including test tolerances.

Table 7.5.12.1.5-1: Cell Specific Parameters for Conditional PSCell Addition and Release

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA Channel Number		1,2	1			
NR Channel Number		1,2	2			
Duplex Mode		1,2	TDD			
TDD configuration		1,2	TDDConf.3.1			
$BW_{channel}$	MHz	1,2	100: $N_{RB,c}$ = 66			
Data RBs allocated		1,2	48			

Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1
TRS Configuration		1	TRS.2.1 TDD
PDSCH/PDCCH TCI state		1	TCI.State.2
PDSCH Reference measurement channel		1,2	SR.3.3 TDD
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD
OCNG Patterns		1,2	OP.3
SSB configuration		1,2	SSB.2 FR2
SMTC configuration		1,2	SMTC.2
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120
TRS Configuration		1,2	TRS.2.1 TDD
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD
reportConfigType		1,2	periodic
reportQuantity		1,2	cri-RI-PMI-CQI
CSI reporting periodicity	slot	1,2	40
CSI reporting offset	slot	1,2	4
EPRE ratio of PSS to SSS	dB	1,2	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition		1,2	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]			

Table 7.5.12.1.5-2: OTA related test parameters

Parameter	Unit	Cell 2			
		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams Note 6		Rough			
$\hat{E}s$ Note2	dBm/SCS	-∞	-81		
SSB_RP Note2, Note 4	dBm/SCS	-∞	-81		
$\hat{E}_s / I_{ot}$ BB Note 2, Note 7	dB	-∞	4.88		
Io Note 2, Note 4	dBm/95.04 MHz	N/A	-56.41		

Note 1:	Void
Note 2:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

$T_{RRC_delay} + T_{Event_DU}$ occurs during T1 as the PSCell addition condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall transmit the PRACH to PSCell (Cell 2) less than $T_{config_PSCell_Addition_Conditional}$ Note1 into T2.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T3.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T3

The UE shall stop sending CSI reports for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay during T2 can be expressed as follows:

$$T_{config_PSCell_Addition_Conditional} = T_{measure} + T_{UE_preparation} + T_{processing} + T_{\Delta} + T_{PSCell_DU} + 2\ ms$$

Where:

$T_{measure}$ = 6720ms for power class 1 or 4160 for power class 2/3/4

$T_{UE_preparation}$ = 10ms

$T_{processing}$ = 40ms

T_{Δ} = 20ms

T_{PSCell_DU} = 1*10+10 = 20 ms

7.5.13 Unified TCI state switch delay

7.5.13.0 Minimum conformance requirements

7.5.13.0.1 Minimum conformance requirements for MAC-CE based downlink TCI state switch delay for unified TCI

Same as clause 5.5.11.0.1.

The normative reference for this requirement is TS 38.133 [6] clause 8.15.2 and 8.15.3.

7.5.13.0.2 Minimum conformance requirements for MAC-CE based uplink TCI state switch delay for unified TCI

Same as clause 5.5.11.0.2.

The normative reference for this requirement is TS 38.133 [6] clause 8.16.2 and 8.16.3.

7.5.13.0.3 Minimum conformance requirements for MAC-CE based uplink TCI state switch delay for unified TCI for 2 known TCI states

The requirements in this clause shall apply for UL TCI state switch using separate UL TCI state or joint TCI state of unified TCI state switch framework and having two indicated TCI-States.

In case of joint TCI state based dual TCI state switch, UE is not expected to transmit on UL before UE completes the DL and UL TCI state switch of both TRPs.

For separate UL TCI state switch or joint TCI state switch for PUCCH or PUSCH, or semi-persistent/aperiodic/periodic SRS, when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1, upon receiving PDSCH carrying MAC-CE activation command in slot n on serving cell,

If both target TCI states are known,

- The UE shall be able to transmit uplink signal with the target TCI state(s) in the slot $n+T_{HARQ} + 3N_{slot}^{subframe,\mu} + \max\{NM1^* (T_{first_target\text{-}PL\text{-}RS1} + 4^*T_{target_PL\text{-}RS1} + 2ms), NM2^* (T_{first_target\text{-}PL\text{-}RS2} + 4^*T_{target_PL\text{-}RS\ 2} + 2ms) \}$/ *NR slot length*.

If both target TCI states are unknown,

- The UE shall be able to transmit uplink signal with the target TCI state(s) in the slot $n+T_{HARQ} + 3N_{slot}^{subframe,\mu} + \max\{T_{L1\text{-}RSRP1} + T_{first_target\text{-}PL\text{-}RS1} + 4^*T_{target_PL\text{-}RS1} + 2ms, T_{L1\text{-}RSRP2} + T_{first_target\text{-}PL\text{-}RS2} + 4^*T_{target_PL\text{-}RS\ 2} + 2ms \}$/ *NR slot length*.

If one of the target TCI states is unknown and the other TCI state is known,

- The UE shall be able to transmit uplink signal with the target TCI state(s) in the slot $n+T_{HARQ} + 3N_{slot}^{subframe,\mu} + \max\{ T_{L1\text{-}RSRP1} + T_{first_target\text{-}PL\text{-}RS1} + 4^*T_{target_PL\text{-}RS1} + 2ms, NM2^* (T_{first_target\text{-}PL\text{-}RS2} + 4^*T_{target_PL\text{-}RS\ 2} + 2ms) \}$/ *NR slot length*.

Where,

- T_{HARQ} (in slot) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [8].
- NM1 = 1, if the target PL-RS of the first TCI state is not maintained by the UE, 0 otherwise.
- NM2 = 1, if the target PL-RS of the second first TCI is not maintained by the UE, 0 otherwise.

  In FR2, in case the target PL-RS associated with or included in the target UL or joint TCI state is SSB, the requirements in this clause shall apply when this target PL-RS is maintained by the UE.

- PL-RS is maintained provided:
  - the target PL-RS is associated with or included in the UL or joint TCI states in the active TCI list for PUSCH/PUCCH/SRS transmissions
  - There are no more than 4 different RS activated as PL-RS per serving cell among all active UL TCI states (UL or joint TCI state) for PUSCH/PUCCH/SRS transmissions
  - The target pathloss reference signal remains detectable during TCI state switching period
    - SNR of the target pathloss reference signal≥-3dB
  - The associated SSBs with the target pathloss reference signal remain detectable during the TCI state switching period.
    - SNR of the associated SSB ≥-3dB
- $T_{first_target\text{-}PL\text{-}RS1}$ is time to first pathloss RS transmission of the first TCI state after L1-RSRP measurement when first target TCI state is unknown.
- $T_{first_target\text{-}PL\text{-}RS2}$ is time to first pathloss RS transmission of the second TCI state after L1-RSRP measurement when second target TCI state is unknown.

- $T_{first_target\text{-}PL\text{-}RS1}$ is time to first pathloss RS transmission of the first TCI state after MAC CE command is decoded by the UE when the first target TCI state is known.
- $T_{first_target\text{-}PL\text{-}RS2}$ is time to first pathloss RS transmission of the second TCI state after MAC CE command is decoded by the UE when the first seond TCI state is known.
- $T_{target_PL\text{-}RS1}$ is the periodicity of the target pathloss reference signal of the first TCI state which would SSB or NZP CSI-RS when PL-RS is associated with serving cell.
- $T_{target_PL\text{-}RS2}$ is the periodicity of the target pathloss reference signal of the second TCI state which would SSB or NZP CSI-RS when PL-RS is associated with serving cell.
- $T_{L1\text{-}RSRP1}$ and $T_{L1\text{-}RSRP2}$ are the time for Rx beam refinement in FR2 for the first and second TCI state, defined as
  - $T_{L1\text{-}RSPR_Measurement_Period_SSB}$ for SSB as specified in TS 38.133 [6] clause 9.5.4.1,
    - with the assumption of M=1
    - with $T_{Report} = 0$
  - $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ for CSI-RS as specified in TS 38.133 [6] clause 9.5.4.2
    - CSI-RS based L1-RSRP measurement only apply for TCI state switch when source RS is associated with serving cell
    - configured with higher layer parameter *repetition* set to ON
    - with the assumption of M=1 for periodic CSI-RS
    - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
    - with $T_{Report} = 0$

The requirements specified in this clause are applicable if no more than 4 different RSs are activated as PL-RS per serving cell among all active UL (or joint) TCI states.

Note: In FR2, the requirements when the target PL-RS is not maintained in this clause apply only when PL-RS are not overlapped or adjacent to the PL-RS of the other TRP.

The normative reference for this requirement is TS 38.133 [6] clause 8.23.3.

7.5.13.1 NR SA FR2 MAC-CE based active joint TCI state switch

Editor's note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

7.5.13.1.1 Test purpose

The purpose of this test is to verify the MAC-CE based joint TCI state switch delay requirement defined in TS 38.133 [6] clause 8.15.3 and 8.16.3 by a UE capable of beam correspondence without the need for UL beam sweeping.

7.5.13.1.2 Test applicability

This test applies to all types of NR UE release 17 onwards and supporting unified TCI state operation.

7.5.13.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.13.0.1 and 7.5.13.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.13.1.

7.5.13.1.4 Test description

There is one NR PCell (Cell 1) configured in this test. This test consists of two successive time periods, with time duration of T1 and T2 respectively.

7.5.13.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.13.1.4.1-1.

Table 7.5.13.1.4.1-1: Supported test configurations for NR SA MAC-CE based active joint TCI state switch

Config	Description
7.5.13.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.13.1.4.1-2.

Table 7.5.13.1.4.1-2: Initial conditions for NR SA MAC-CE based active joint TCI state switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.13.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.13.1.4.1-3.
2. Message contents are defined in clause 7.5.13.1.4.3.
3. There is one NR cell specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 7.5.13.1.4.1-3: General test parameters for NR SA MAC-CE based active joint TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel No.		Channel 1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
Number of RS for L1-RSRP reporting		2	Two source RSs in TCI state 0 and 1.
T1	s	0.2	
T2	s	2	

7.5.13.1.4.2 Test procedure

During the test PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending.

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR PCell. The UE shall be configured with 2 different DLorJoint states for PCell: Joint TCI state 0 (QCL'd to SSB0) and Joint TCI state 1 (QCL'd to SSB1), in Cell 1 before starting the test. Joint TCI state 0 is indicated as the active joint TCI-state and the TCI state 1 is not in the active TCI state list for PDSCH/PDCCH.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters according to T1 in Table 7.5.13.1.5-1. Propagation conditions are set according to clause C.2.2. T1 starts. During T1 only SSB0 to which Joint TCI state 0 is QCL'd is transmitted.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.13.1.5-1. T2 starts. At the beginning of T2, the SSB1 corresponding to Joint TCI state 1 starts transmitting.

4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.

5. The UE transmits an *RRCReconfigurationComplete* message.

6. The SS sends a MAC-CE to indicate switch to Joint TCI-state 1 in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.

7. If the SS:

   a) Receives ACK/NACK on each UL transmission occasion scheduled on Joint TCI state 0 until slot $n+T_{HARQ}+3N_{slot}^{subframe,\mu}$, and

   b) Receives ACK/NACK on each UL transmission occasion scheduled on Joint TCI state 1 after slot $n+ T_{HARQ} +3N_{slot}^{subframe,\mu} + (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} + 2ms)$ / *NR slot length*

   the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.

8. When T2 expires the SS shall sends a MAC-CE to indicate switch to Joint TCI state 0.

9. Wait 1s for the UE to switch Joint TCI state 0. If the SS receives ACK/NACK on each UL transmission occasion scheduled on Joint TCI state 0 continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.13.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.13.1.4.3-1: Common Exception messages for NR SA MAC-CE based active joint TCI state switch

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB

Table 7.5.13.1.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
mimoParam-r17 CHOICE {			
setup SEQUENCE {			
additionalPCI-ToAddModList-r17	Not present		
additionalPCI-ToReleaseList-r17	Not present		
unifiedTCI-StateType-r17	joint		
uplink-PowerControlToAddModList-r17 SEQUENCE (SIZE (1..maxUL-TCI-r17)) OF Uplink-powerControl-r17 {	1 entry		
uplink-powerControl-r17[1] SEQUENCE {		Entry 1	
ul-powercontrolId-r17	1		
p0AlphaSetforPUSCH-r17 SEQUENCE {			
p0-r17	0		

alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
p0AlphaSetforPUCCH-r17 SEQUENCE {			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
p0AlphaSetforSRS-r17 SEQUENCE {			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
}			
}			
uplink-PowerControlToReleaseList-r17	Not present		
sfnSchemePDCCH-r17	Not present		
sfnSchemePDSCH-r17	Not present		
}			
}			
}			

Table 7.5.13.1.4.3-3: *BWP-UplinkDedicated*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-15			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-UplinkDedicated ::= SEQUENCE {			
pathlossReferenceRSToAddModList-r17 SEQUENCE (SIZE (1..maxNrofPathlossReferenceRSs-r17)) OF PathlossReferenceRS-r17 {	1 entry		
PathlossReferenceRS-r17 [1] SEQUENCE {		Entry 1	
pathlossReferenceRS-Id-r17	0		
referenceSignal-r17 CHOICE {			
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4)	Resource #4 in TRS.2.1	
}			
additionalPCI-r17	Not present		
}			
}			
pathlossReferenceRSToReleaseList-r17	Not present		
}			

Table 7.5.13.1.4.3-4: *PDSCH-Config*

Derivation Path: TS 38.508-1 [14], table 4.6.3-100			
Information Element	**Value/remark**	**Comment**	**Condition**
pdsch-HARQ-ACK-OneShotFeedbackDCI-1-2-r17	Not present		
pdsch-HARQ-ACK-EnhType3DCI-1-2-r17	Not present		
pdsch-HARQ-ACK-EnhType3DCI-Field-1-2-r17	Not present		
pdsch-HARQ-ACK-RetxDCI-1-2-r17	Not present		
pucch-sSCellDynDCI-1-2-r17	Not present		
dl-OrJointTCI-StateList-r17 CHOICE {			
explicitlist SEQUENCE {			
dl-OrJointTCI-StateToAddModList-r17 SEQUENCE (SIZE (1..maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State [1]	TCI-state_1	Entry 1 DLorJoint TCI.State.2	
TCI-State [2]	TCI-state_2	Entry 2 DLorJoint TCI.State.3	
}			

dl-OrJointTCI-StateToReleaseList-r17	Not present		
}			
}			
beamAppTime-r17	Not present		
dummy	Not present		
dmrs-FD-OCC-DisabledForRank1-PDSCH-r17	Not present		
minimumSchedulingOffsetK0-r17	Not present		
harq-ProcessNumberSizeDCI-1-2-v1700	Not present		
harq-ProcessNumberSizeDCI-1-1-r17	Not present		
mcs-Table-r17	Not present		
mcs-TableDCI-1-2-r17	Not present		
xOverheadMulticast-r17	Not present		
priorityIndicatorDCI-4-2-r17	Not present		
sizeDCI-4-2-r17	Not present		
}			

Table 7.5.13.1.4.3-5: *TCI-State_1* (Table 7.5.13.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**
TCI-State ::= SEQUENCE {			
tci-StateId	0		
qcl-Type1 SEQUENCE {			
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			
qcl-Type	typeD		
}			
additionalPCI-r17	Not present		
pathlossReferenceRS-Id-r17	0	TRS.2.1 TDD Resource #4	
ul-powerControl-r17	1		
}			

Table 7.5.13.1.4.3-6: *TCI-State_2* (Table 7.5.13.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**
TCI-State ::= SEQUENCE {			
tci-StateId	1		
qcl-Type1 SEQUENCE {			
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #1		
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #1		
}			
qcl-Type	typeD		
}			
additionalPCI-r17	Not present		

pathlossReferenceRS-Id-r17	0	TRS.2.1 TDD Resource #4	
ul-powerControl-r17	1		
}			

7.5.13.1.5 Test requirement

Tables 7.5.13.1.4.1-3, 7.5.13.1.5-1 and 7.5.13.1.5-2 define the primary level settings including test tolerances for NR SA MAC-CE based active TCI state switch.

Table 7.5.13.1.5-1: NR Cell specific test parameters for NR SA MAC-CE based active joint TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
PL-RS Configuration (CSI-RS#1)		Resource #4 in TRS.2.1 TDD for DLorJoint TCI.State.2 and DLorJoint TCI.State.3
Joint TCI State 0		DLorJoint TCI.State.2
Joint TCI State 1		DLorJoint TCI.State.3
TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.2 TRS 2.2 TDD for DLorJoint TCI.State.3
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]		

Table 7.5.13.1.5-2: OTA related test parameter for NR SA MAC-CE based active joint TCI state switch

Parameter	Unit	Cell 1			
		Source RS in TCI state 0		Source RS in TCI state 1	
		T1	T2	T1	T2

Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{ot}$ BB Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-56.0	-56.0	-Infinity	-56.0

Note 1: Void
Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to receive and transmit with TCI state 0 until slot n + T_{HARQ} + $3N_{slot}^{subframe,\mu}$
- be able to start receiving and transmitting with TCI state 1 after slot n + T_{HARQ} + $3N_{slot}^{subframe,\mu}$ + ($T_{first_target\text{-}PL\text{-}RS}$ + 4*$T_{target_PL\text{-}RS}$ + 2ms) / *NR slot length*

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.13.2 NR SA FR2 MAC-CE based active uplink TCI state switch

Editor's note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.5.13.2.1 Test purpose

The purpose of this test is to verify the MAC-CE based uplink TCI state switch delay requirement defined in TS 38.133 [6] clause 8.16.3 by a UE capable of beam correspondence without the need for UL beam sweeping.

7.5.13.2.2 Test applicability

This test applies to all types of NR UE release 17 onwards and supporting unified TCI state operation.

7.5.13.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.13.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.13.2.

7.5.13.2.4 Test description

There is one NR PCell (Cell 1) configured in this test. This test consists of two successive time periods, with time duration of T1 and T2 respectively.

7.5.13.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.13.2.4.1-1.

Table 7.5.13.2.4.1-1: Supported test configurations for NR SA MAC-CE based active uplink TCI state switch

Config	Description
7.5.13.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.13.2.4.1-2.

Table 7.5.13.2.4.1-2: Initial conditions for NR SA MAC-CE based active uplink TCI state switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.13.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.13.2.4.1-3.
2. Message contents are defined in clause 7.5.13.2.4.3.
3. There is one NR cell specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 7.5.13.2.4.1-3: General test parameters for NR SA MAC-CE based active uplink TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

7.5.13.2.4.2 Test procedure

During the test PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending.

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR PCell. The UE shall be configured with 2 different uplink TCI states for PCell: Uplink TCI state 0 (associated with SSB0) and uplink TCI state 1 (associated with SSB1), in Cell 1 before starting the test. Uplink TCI state 0 is indicated as the active uplink TCI-state and the TCI state 1 is not in the active TCI state list for PDSCH/PDCCH. The UE shall be configured with a unified DL TCI state 0, and SSB0 is configured as QCL source for the TCI state. At the start of test UE is connected to DL TCI state 0.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters according to T1 in Table 7.5.13.2.5-1. Propagation conditions are set according to clause C.2.2. T1 starts. During T1 only SSB0 to which uplink TCI state 0 is QCL'd is transmitted.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.13.2.5-1. T2 starts. At the beginning of T2, the SSB1 corresponding to uplink TCI state 1 starts transmitting.

4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.

5. The UE transmits an *RRCReconfigurationComplete* message.

6. The SS sends a MAC-CE to indicate switch to uplink TCI-state 1 in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.

7. If the SS:

   a) Receives ACK/NACK on each UL transmission occasion scheduled on uplink TCI state 0 until slot $n+T_{HARQ}+3N_{slot}^{subframe,\mu}$, and

   b) Receives ACK/NACK on each UL transmission occasion scheduled on uplink TCI state 1 after slot $n+ T_{HARQ} +3N_{slot}^{subframe,\mu} + (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} + 2ms)$ / *NR slot length*

   the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.

8. When T2 expires the SS shall sends a MAC-CE to indicate switch to uplink TCI state 0.

9. Wait 1s for the UE to switch uplink TCI state 0. If the SS receives ACK/NACK on each UL transmission occasion scheduled on uplink TCI state 0 continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.13.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.13.2.4.3-1: Common Exception messages for NR SA MAC-CE based active uplink TCI state switch

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB

Table 7.5.13.2.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
mimoParam-r17 CHOICE {			
setup SEQUENCE {			
additionalPCI-ToAddModList-r17	Not present		
additionalPCI-ToReleaseList-r17	Not present		
unifiedTCI-StateType-r17	seperate		
uplink-PowerControlToAddModList-r17 SEQUENCE (SIZE (1..maxUL-TCI-r17)) OF Uplink-powerControl-r17 {	1 entry		
uplink-powerControl-r17[1] SEQUENCE {		Entry 1	
ul-powercontrolId-r17	1		
p0AlphaSetforPUSCH-r17			
p0-r17	0		

alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
p0AlphaSetforPUCCH-r17			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
p0AlphaSetforSRS-r17			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
}			
}			
uplink-PowerControlToReleaseList-r17	Not present		
sfnSchemePDCCH-r17	Not present		
sfnSchemePDSCH-r17	Not present		
}			
}			
}			

Table 7.5.13.2.4.3-3: *BWP-UplinkDedicated*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-15			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-UplinkDedicated ::= SEQUENCE {			
ul-TCI-StateList-r17 CHOICE {			
explicitlist SEQUENCE {			
ul-TCI-ToAddModList-r17 SEQUENCE (SIZE (1..maxUL-TCI-r17)) OF TCI-UL-State-r17 {			
TCI-UL-State-r17 [1] SEQUENCE {			
tci-UL-StateId-r17	0		
servingCellId-r17	Not present		
bwp-Id-r17	Not present		
referenceSignal-r17 CHOICE {			
ssb	SSB-Index of SSB #0		
}			
additionalPCI-r17	Not present		
ul-powerControl-r17	1		
pathlossReferenceRS-Id-r17	0		
}			
TCI-UL-State-r17 [2] SEQUENCE {			
tci-UL-StateId-r17	1		
servingCellId-r17	Not present		
bwp-Id-r17	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #1		
}			
additionalPCI-r17	Not present		
ul-powerControl-r17	1		
pathlossReferenceRS-Id-r17	0		
}			
}			
ul-TCI-ToReleaseList-r17	Not present		
}			
}			
ul-powerControl-r17	Not present		
pucch-ConfigurationListMulticast1-r17	Not present		
pucch-ConfigurationListMulticast2-r17	Not present		
pathlossReferenceRSToAddModList-r17 SEQUENCE (SIZE (1..maxNrofPathlossReferenceRSs-r17)) OF PathlossReferenceRS-r17 {			
PathlossReferenceRS-r17 [1] SEQUENCE {			

pathlossReferenceRS-Id-r17	0		
referenceSignal-r17 CHOICE {			
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4)	Resource #4 in TRS.2.1	
}			
additionalPCI-r17	Not present		
}			
}			
pathlossReferenceRSToReleaseList-r17	Not present		
}			

7.5.13.2.5 Test requirement

Tables 7.5.13.2.4.1-3, 7.5.13.2.5-1 and 7.5.13.2.5-2 define the primary level settings including test tolerances for NR SA MAC-CE based active TCI state switch.

Table 7.5.13.2.5-1: NR Cell specific test parameters for NR SA MAC-CE based active uplink TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
DL TCI State		DLorJoint TCI.State.0
PL-RS Configuration for CSI-RS#0		Resource #4 in TRS.2.1 TDD for UL TCI.State.2
PL-RS Configuration for CSI-RS#1		Resource #4 in TRS.2.2 TDD for UL TCI.State.3
UL TCI State-0 Configuration		UL TCI.State.2
UL TCI State-1 Configuration		UL TCI.State.3
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 7.5.13.2.5-2: OTA related test parameter for NR SA MAC-CE based active uplink TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
N_{oc} Note 1	dBm/15 kHz	-95.1			
N_{oc} Note 1	dBm/SCS	-86.1			
$\hat{E}_s/N_{oc}$	dB	3.4		-infinity	3.4
SS-RSRP Note 2	dBm/120 kHz Note3	-82.7		-infinity	-82.7
Io Note2	dBm/95.04 MHz Note4	-56.47		-61.5	-56.47

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- Continue transmitting using UL TCI state 0 up to and including slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu}$
- Start transmitting using UL TCI state 1, from slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + (T_{first_target\text{-}PL\text{-}RS} + 4*T_{target_PL\text{-}RS} +$ 2ms) / *NR slot length* and onwards.

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.13.3 NR SA FR2 MAC-CE based active downlink TCI state switch

Editor's note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.5.13.3.1 Test purpose

The purpose of this test is to verify the MAC-CE based downlink TCI state switch delay requirement defined in TS 38.133 [6] clause 8.16.2 by a UE capable of beam correspondence without the need for UL beam sweeping.

7.5.13.3.2 Test applicability

This test applies to all types of NR UE release 17 onwards and supporting unified TCI state operation.

7.5.13.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.13.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.13.3.

7.5.13.3.4 Test description

There is one NR PCell (Cell 1) configured in this test. This test consists of two successive time periods, with time duration of T1 and T2 respectively.

7.5.13.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.13.3.4.1-1.

Table 7.5.13.3.4.1-1: Supported test configurations for NR SA MAC-CE based active downlink TCI state switch

Config	Description
7.5.13.3-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.13.3.4.1-2.

Table 7.5.13.3.4.1-2: Initial conditions for NR SA MAC-CE based active downlink TCI state switch

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.13.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.13.3.4.1-3.
2. Message contents are defined in clause 7.5.13.3.4.3.
3. There is two NR cells specified in the test: one NR PCell (Cell 1) and one NR cell as the cell with additional PCI (Cell 2). NR Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 7.5.13.3.4.1-3: General test parameters for NR SA MAC-CE based active downlink TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Cell with additional PCI		Cell 2	NR Cell on RF channel number 2.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	Two source RSs in TCI state 0 and 1.
Cell2 timing offset to cell1	us	<CP	
T1	s	0.2	
T2	s	2	

7.5.13.3.4.2 Test procedure

During the test PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending.

Prior to the start of the time duration T1, the UE shall be fully synchronized to NR PCell. The UE shall be configured with 2 different downlink TCI states for PCell: Downlink TCI state 0 (QCL'd to TRS resource set 1, TCI state of which is QCLed to SSB0 of Cell1) and downlink TCI state 1 (QCL'd to TRS resource set 2, TCI state of which is QCLed to SSB1 of Cell2), in Cell 1 before starting the test. Downlink TCI state 0 is indicated as the active downlink TCI-state.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
2. Set the parameters according to T1 in Table 7.5.13.3.5-1. Propagation conditions are set according to clause C.2.2. T1 starts. During T1 only SSB0 to which downlink TCI state 0 is QCL'd is transmitted.
3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.13.3.5-1. T2 starts. At the beginning of T2, the SSB1 corresponding to downlink TCI state 1 starts transmitting.
4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.
5. The UE transmits an *RRCReconfigurationComplete* message.
6. The SS sends a MAC-CE to indicate switch to downlink TCI-state 1 in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1.
7. If the SS:
   a) Receives ACK/NACK on each UL transmission occasion scheduled on downlink TCI state 0 until slot $n+T_{HARQ}+3N_{slot}^{subframe,\mu}$, and
   b) Receives ACK/NACK on each UL transmission occasion scheduled on downlink TCI state 1 after slot $n+T_{HARQ}+3N_{slot}^{subframe,\mu}+(T_{first\text{-}SSB}+T_{SSB\text{-}proc})$ / *NR slot length*

   the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.
8. When T2 expires the SS shall sends a MAC-CE to indicate switch to downlink TCI state 0.
9. Wait 1s for the UE to switch downlink TCI state 0. If the SS receives ACK/NACK on each UL transmission occasion scheduled on downlink TCI state 0 continue to step 11. Otherwise continue to step 10.
10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.13.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.13.3.4.3-1: Common Exception messages for NR SA MAC-CE based active downlink TCI state switch

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB

Table 7.5.13.3.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
mimoParam-r17 CHOICE {			
setup SEQUENCE {			
additionalPCI-ToAddModList-r17	Not present		
additionalPCI-ToReleaseList-r17	Not present		

unifiedTCI-StateType-r17	separate		
uplink-PowerControlToAddModList-r17	Not present		
uplink-PowerControlToReleaseList-r17	Not present		
sfnSchemePDCCH-r17	Not present		
sfnSchemePDSCH-r17	Not present		
}			
}			
}			

Table 7.5.13.3.4.3-3: *PDSCH-Config*

Derivation Path: TS 38.508-1 [14], table 4.6.3-100			
Information Element	**Value/remark**	**Comment**	**Condition**
pdsch-HARQ-ACK-OneShotFeedbackDCI-1-2-r17	Not present		
pdsch-HARQ-ACK-EnhType3DCI-1-2-r17	Not present		
pdsch-HARQ-ACK-EnhType3DCI-Field-1-2-r17	Not present		
pdsch-HARQ-ACK-RetxDCI-1-2-r17	Not present		
pucch-sSCellDynDCI-1-2-r17	Not present		
dl-OrJointTCI-StateList-r17 CHOICE {			
explicitlist SEQUENCE {			
dl-OrJointTCI-StateToAddModList-r17 SEQUENCE (SIZE (1..maxNrofTCI-States)) OF TCI-State {	2 entries		
TCI-State [1] SEQUENCE {	TCI-state_1	Entry 1 DLorJoint TCI.State.2	
TCI-State [2] SEQUENCE {	TCI-state_2	Entry 2 DLorJoint TCI.State.3	
}			
dl-OrJointTCI-StateToReleaseList-r17	Not present		
}			
}			
beamAppTime-r17	Not present		
dummy	Not present		
dmrs-FD-OCC-DisabledForRank1-PDSCH-r17	Not present		
minimumSchedulingOffsetK0-r17	Not present		
harq-ProcessNumberSizeDCI-1-2-v1700	Not present		
harq-ProcessNumberSizeDCI-1-1-r17	Not present		
mcs-Table-r17	Not present		
mcs-TableDCI-1-2-r17	Not present		
xOverheadMulticast-r17	Not present		
priorityIndicatorDCI-4-2-r17	Not present		
sizeDCI-4-2-r17	Not present		
}			

Table 7.5.13.3.4.3-4: *TCI-State_1* (Table 7.5.13.3.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**
TCI-State ::= SEQUENCE {			
tci-StateId	0		
qcl-Type1 SEQUENCE {			
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			

qcl-Type	typeD		
}			
additionalPCI-r17	Not present		
pathlossReferenceRS-Id-r17	Not present		
ul-powerControl-r17	Not present		
}			

Table 7.5.13.3.4.3-5: *TCI-State_2* (Table 7.5.13.3.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-190			
Information Element	**Value/remark**	**Comment**	**Condition**
TCI-State ::= SEQUENCE {			
tci-StateId	1		
qcl-Type1 SEQUENCE {			
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #1		
}			
qcl-Type	typeA		
}			
qcl-Type2 SEQUENCE {			
cell	Not present		
bwp-Id	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #1		
}			
qcl-Type	typeD		
}			
additionalPCI-r17	Not present		
pathlossReferenceRS-Id-r17	Not present		
ul-powerControl-r17	Not present		
}			

7.5.13.3.5 Test requirement

Tables 7.5.13.3.4.1-3, 7.5.13.3.5-1 and 7.5.13.3.5-2 define the primary level settings including test tolerances for NR SA MAC-CE based active TCI state switch.

Table 7.5.13.3.5-1: NR Cell specific test parameters for NR SA MAC-CE based active downlink TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2 for SSB0 of Cell 1 and SSB1 of Cell 2
SMTC Configuration		SMTC.1
DL TCI State 0		DLorJoint TCI.State.0
DL TCI State 1		DLorJoint TCI.State.1
TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.0 TRS.2.2 TDD for DLorJoint TCI.State.1

Pathloss RS Configuration		Resource #4 in TRS.2.1 TDD
reportQuantity for SSB		ssb-Index-RSRP-Index-r17
reportConfigType for SSB		periodic
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]		

Table 7.5.13.3.5-2: OTA related test parameter for NR SA MAC-CE based active downlink TCI state switch

Parameter	Unit	Cell 1		Cell 2	
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B_RP Note 2	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{ot}$ BB Note 7	dB	8.3	8.3	-Infinity	8.3
Io Note2	dBm/95.04 MHz Note4	-56.0	-56.0	- Infinity	-56.0
Note 1: Void Note 2: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 7: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on DL TCI state 0 till slot n+ T_{HARQ} +3$N_{slot}^{subframe,\mu}$
- be able to start receiving on DL TCI state 1 after n+ T_{HARQ} + (5ms + $T_{first\text{-}SSB}$) / *NR slot length*

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.13.4 to 7.5.13.5

7.5.13.6 MAC-CE based active uplink TCI state switch for single-DCI mTRP

7.5.13.6.1 NR SA FR2 MAC-CE based active uplink TCI state switch for 2 known TCI states

7.5.13.6.1.1 Test purpose

The purpose of this test is to verify fulfilment of the uplink TCI switch delay requirement defined in TS 38.133 [6] clause 8.23.3 by a UE capable of beam correspondence without the need for UL beam sweeping. The test scenario comprises one PCell (Cell 1) with two TRPs.

7.5.13.6.1.2 Test applicability

This test applies to all types of NR UE release 18 onwards and supporting unified TCI state operation for single-DCI based intra-cell multi-TRP with multiple activated TCI states.

7.5.13.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.13.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.5.13.6.1.

7.5.13.6.1.4 Test description

There is one NR PCell (Cell 1) configured in this test. This test consists of two successive time periods, with time duration of T1 and T2 respectively.

7.5.13.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.5.13.6.1.4.1-1.

Table 7.5.13.6.1.4.1-1: Supported test configurations for NR SA MAC-CE based active uplink TCI state switch for two known TCI states

Config	Description
7.5.13.6.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.5.13.6.1.4.1-2.

Table 7.5.13.6.1.4.1-2: Initial conditions for NR SA MAC-CE based active uplink TCI state switch for two known TCI states

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.3-1 and TS 38.508-1 [14] clause 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.13.6.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.13.6.1.4.1-3.
2. Message contents are defined in clause 7.5.13.6.1.4.3.
3. There is one NR cell specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 7.5.13.6.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment

NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1, SSB2, SSB3	L1-RSRP measurements of SSB0, SSB1, SSB2 and SSB3.
Number of reported RS		3	L1-RSRP reporting of measurements on SSB0, SSB1, SSB2, and SSB3.
T1	s	0.2	
T2	s	2	

7.5.13.6.1.4.2 Test procedure

During the test PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending. Prior to the start of the time duration T1, the UE shall be fully synchronized to NR PCell. The UE shall be configured with 4 different uplink TCI states for PCell: Uplink TCI state 0 (associated with SSB0), uplink TCI state 1 (associated with SSB1), Uplink TCI state 2 (associated with SSB2), and Uplink TCI state 3 (associated with SSB3) in Cell 1 before starting the test. Uplink TCI state 0 is indicated as the active uplink TCI-state and the TCI state 1, TCI state 2, TCI state 3 is not in the active TCI state list for PDSCH/PDCCH. The UE shall be configured with a unified DL TCI state 0, and SSB0 is configured as QCL source for the TCI state. At the start of test UE is connected to DL TCI state 0 and UL TCI state 0, and UL TCI state 1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

2. Set the parameters according to T1 in Table 7.5.13.6.1.5-2. Propagation conditions are set according to clause C.2.2. T1 starts. During T1 only SSB0, SSB1 to which uplink TCI state 0, TCI state 1 is QCL'd is transmitted.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 7.5.13.6.1.5-2. T2 starts. At the beginning of T2, the SSB2 corresponding to uplink TCI state 2, and the SSB3 corresponding to uplink TCI state 3 starts transmitting.

4. The SS transmits an *RRCReconfiguration* message to configure periodic L1-RSRP reporting.

5. The UE transmits an *RRCReconfigurationComplete* message.

6. The SS sends a MAC-CE to indicate switch to uplink TCI-state 2 and to uplink TCI-state 3 in slot n which is within 1280ms of UE providing L1-RSRP report with results for SSB0, SSB1, SSB2, and SSB3.

7. If the SS:

   a) Receives ACK/NACK on each UL transmission occasion scheduled on uplink TCI state 0 and uplink TCI state 1 until slot $n+T_{HARQ}+3N_{slot}^{subframe,\mu}$, and

   b) Receives ACK/NACK on each UL transmission occasion scheduled on uplink TCI state 2 and uplink TCI state 3 after slot $n+ T_{HARQ} +3N_{slot}^{subframe,\mu} + \max\{NM1* (T_{first_target\text{-}PL\text{-}RS1} + 4*T_{target_PL\text{-}RS1} + 2ms), NM2* (T_{first_target\text{-}PL\text{-}RS2} + 4*T_{target_PL\text{-}RS2} + 2ms)\}$ / *NR slot length.* NM1 is equal to 1. NM2 is equal to 1.

   the number of successful tests is increased by one, otherwise the number of failed tests is increased by one.

8. When T2 expires the SS shall sends a MAC-CE to indicate switch to uplink TCI state 1 and uplink TCI state 2.

9. Wait 1s for the UE to switch to uplink TCI state 1 and uplink TCI state 2. If the SS receives ACK/NACK on each UL transmission occasion scheduled on uplink TCI state 0 continue to step 11. Otherwise continue to step 10.

10. Switch the UE on and off. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.

11. Repeat steps 2-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.5.13.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.5.13.6.1.4.3-1: Common Exception messages for NR SA MAC-CE based active uplink TCI state switch for two known TCI states

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB

Table 7.5.13.6.1.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
mimoParam-r17 CHOICE {			
setup SEQUENCE {			
additionalPCI-ToAddModList-r17	Not present		
additionalPCI-ToReleaseList-r17	Not present		
unifiedTCI-StateType-r17	separate		
uplink-PowerControlToAddModList-r17 SEQUENCE (SIZE (1..maxUL-TCI-r17)) OF Uplink-powerControl-r17 {	1 entry		
uplink-powerControl-r17[1] SEQUENCE {		Entry 1	
ul-powercontrolId-r17	1		
p0AlphaSetforPUSCH-r17 SEQUENCE {			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
p0AlphaSetforPUCCH-r17 SEQUENCE {			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
p0AlphaSetforSRS-r17 SEQUENCE {			
p0-r17	0		
alpha-r17	Alpha08		
closedLoopIndex-r17	i0		
}			
}			
}			
uplink-PowerControlToReleaseList-r17	Not present		
sfnSchemePDCCH-r17	Not present		
sfnSchemePDSCH-r17	Not present		
}			
}			
}			

Table 7.5.13.6.1.4.3-3: *BWP-UplinkDedicated*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-15			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-UplinkDedicated ::= SEQUENCE {			
ul-TCI-StateList-r17 CHOICE {			
explicitlist SEQUENCE {			
ul-TCI-ToAddModList-r17 SEQUENCE (SIZE (1..maxUL-TCI-r17)) OF TCI-UL-State-r17 {			
TCI-UL-State-r17 [1] SEQUENCE {			
tci-UL-StateId-r17	0		
servingCellId-r17	Not present		
bwp-Id-r17	Not present		

referenceSignal CHOICE {			
ssb	SSB-Index of SSB #0		
}			
additionalPCI-r17	Not present		
ul-powerControl-r17	1		
pathlossReferenceRS-Id-r17	0		
}			
TCI-UL-State-r17 [2] SEQUENCE {			
tci-UL-StateId-r17	1		
servingCellId-r17	Not present		
bwp-Id-r17	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #1		
}			
additionalPCI-r17	Not present		
ul-powerControl-r17	1		
pathlossReferenceRS-Id-r17	0		
}			
TCI-UL-State-r17 [3] SEQUENCE {			
tci-UL-StateId-r17	2		
servingCellId-r17	Not present		
bwp-Id-r17	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #2		
}			
additionalPCI-r17	Not present		
ul-powerControl-r17	1		
pathlossReferenceRS-Id-r17	0		
}			
TCI-UL-State-r17 [4] SEQUENCE {			
tci-UL-StateId-r17	3		
servingCellId-r17	Not present		
bwp-Id-r17	Not present		
referenceSignal CHOICE {			
ssb	SSB-Index of SSB #3		
}			
additionalPCI-r17	Not present		
ul-powerControl-r17	1		
pathlossReferenceRS-Id-r17	0		
}			
}			
ul-TCI-ToReleaseList-r17	Not present		
}			
}			
ul-powerControl-r17	Not present		
pucch-ConfigurationListMulticast1-r17	Not present		
pucch-ConfigurationListMulticast2-r17	Not present		
pathlossReferenceRSToAddModList-r17 SEQUENCE (SIZE (1..maxNrofPathlossReferenceRSs-r17)) OF PathlossReferenceRS-r17 {			
PathlossReferenceRS-r17 [1] SEQUENCE {			
pathlossReferenceRS-Id-r17	0		
referenceSignal-r17 CHOICE {			
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4)	Resource #4 in TRS.2.1	
}			
additionalPCI-r17	Not present		
}			
}			
pathlossReferenceRSToReleaseList-r17	Not present		
}			

7.5.13.6.1.5 Test Requirement

Tables 7.5.13.6.1.4.1-3, 7.5.13.6.1.5-1 and 7.5.13.6.1.5-2 define the primary level settings including test tolerances for NR SA MAC-CE based active TCI state switch for two known TCI states.

Table 7.5.13.6.1.5-1: OTA related test parameter for NR SA MAC-CE based active uplink TCI state switch two known TCI states

Parameter	Unit	Cell 1							
		SSB0		SSB1		SSB2		SSB3	
		T1	T2	T1	T2	T1	T2	T1	T2
Angle of arrival configuration		Setup 7 according to clause A.9.7							
		AoA1		AoA2		AoA1		AoA3	
Assumption for UE beams Note 6		Rough							
N_{oc} Note 1	dBm/15 kHz	-92.1							
N_{oc} Note 1	dBm/SCS	-86.1							
$\hat{E}_s/N_{oc}$	dB	3.4		-infinity	3.4	-infinity	3.4	-infinity	3.4
SS-RSRP Note 2	dBm/120 kHz Note3	-82.7		-infinity	-82.7	-infinity	-82.7	-infinity	-82.7
Io Note2	dBm/95.04 MHz Note4	-56.47		-61.51	-56.47	-61.51	-56.47	-61.51	-56.47

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

Table 7.5.13.6.1.5-2: NR Cell specific test parameters for NR SA MAC-CE based active uplink TCI state switch for two known TCI states

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
DL TCI State		DLorJoint TCI.State.0
PL-RS Configuration for CSI-RS#0		Resource #4 in TRS.2.1 TDD for UL TCI.State.2
PL-RS Configuration for CSI-RS#1		Resource #4 in TRS.2.2 TDD for UL TCI.State.3
PL-RS Configuration for CSI-RS#2		Resource #4 in TRS.2.4 TDD for UL TCI.State.4
PL-RS Configuration for CSI-RS#3		Resource #4 in TRS.2.5 TDD for UL TCI.State.5
UL TCI State-0 Configuration		UL TCI.State.2

UL TCI State-1 Configuration		UL TCI.State.3
UL TCI State-2 Configuration		UL TCI.State.4
UL TCI State-3 Configuration		UL TCI.State.5
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

During T2, the UE shall send L1-RSRP report with results for SSB0 and SSB1. After receiving MAC-CE command in slot *n*, the UE shall:

- Continue transmitting using UL TCI state 0 and UL TCI state 1 up to and including slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu}$

- Start transmitting using UL TCI state 2 and UL TCI state 3, from slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + \max\{T_{first_target-PL-RS1} + 4*T_{target_PL-RS1} + 2ms, T_{first_target-PL-RS2} + 4*T_{target_PL-RS2} + 2ms\}$ / *NR slot length* and onwards.

The rate of correct events observed during repeated tests shall be at least 90%.

7.5.14 PSCell activation and deactivation delay

7.5.14.0 Minimum conformance requirements

7.5.14.0.1 SCG Activation Delay Requirement

The requirements in this clause shall apply for the UE configured with one deactivated SCG in NR-DC and when PScell in one SCG is being activated.

The delay within which the UE shall be able to activate the deactivated SCG depends upon the specified conditions.

Upon receiving SCG activation command in slot *n*, the UE shall be capable to transmit PRACH preamble or PUCCH or PUSCH towards PSCell no later than in slot $n + \frac{T_{activation_time}}{NR\ slot\ length}$,

where:

$T_{activation_time} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2$ ms

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [13].

$T_{processing}$ is the SW processing time needed by UE, including RF warm up period. When PSCell is activated from deactivated state, if any PSCell parameter is modified, $T_{processing}$ = 20ms. Otherwise, $T_{processing}$ = 5 ms.T_{search} is the time for AGC settling and PSS/SSS detection.

T_{search} is the time for AGC settling and PSS/SSS detection.

For RACH based PSCell activation, if the target cell is a known NR FR2 PSCell, T_{search} = 0 ms. If the target cell is an unknown FR2 PSCell and Es/Iot $\geq$ -2 dB, then T_{search} = 24* T_{rs} ms.

For RACH-less based PSCell activation, if RLM and BFD are configured and TCI state is known, T_{search} = 0 ms if the target cell is a known FR2 PScell. There are no requirements if PSCell is unknown.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target PSCell. T_{Δ} = 1*Trs ms.

T_{IU}: When RACH based PSCell activation is configured, it is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{IU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

When RACH-less based PSCell activation is configured, it is the uncertainty in acquiring the first PUSCH transmission occasion [or SR on PUCCH].

Trs is the SMTC periodicity of the PSCell if the UE has been provided with an SMTC configuration for the target cell in SCG activation command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5.

In FR2, the PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the SCG activation command:
  - the UE has sent a valid measurement report for the PSCell being activated and
  - One of the SSBs measured from the PSCell being activated remains detectable according to the cell identification conditions specified in clause 9.3.
  - One of the SSBs measured from PSCell being activated also remains detectable during the PSCell activation delay $T_{activation_time}$ according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

If the UE is configured to perform BFD while the SCG is deactivated

- The TCI state is known if the following conditions are met:
  - During the period from the PSCell deactivation to the completion of PSCell activation, while PSCell was deactivated,
  - UE has not detected beam failure
- Otherwise, the TCI state is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure TS 38.331 [13].

The normative reference for this requirement is TS 38.133 [6] clause 8.17.2.

7.5.14.0.2 SCG Deactivation Delay Requirement

The requirements in this clause shall apply for a UE which is configured with at least PCell and PScell.

Upon receiving RRC-based SCG deactivation command in subframe *n*, the UE shall accomplish the deactivation actions specified in TS 38.331 [13] no later than in slot $n + \frac{T_{RRC_delay}}{NR\ slot\ length}$:

where

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [13].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure TS 38.331 [13].

The normative reference for this requirement is TS 38.133 [6] clause 8.17.3.

7.5.14.1 NR SA FR2 PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2

Editor's note: This test case is incomplete. The following aspects are either missing or TBD

- General test parameters are TBD since it's missing in TS 38.133

7.5.14.1.1 Test purpose

The purpose of this test case is to test the activation PSCell delay for a UE configured with one deactivated SCG in NR-DC and when PScell in one SCG is being activated. The test also tests the deactivation delay. The test case tests the requirements within which the UE shall be able to activate the deactivated SCG in TS 38.133 [6] section 8.17.2 for RACH-less based conditions when PSCell and TCI state are known. The PCell is in NR FR1 and the PSCell is in NR FR2.

7.5.14.1.2 Test applicability

This test applies to all types of NR UE from Release 17 onwards and supporting NR-DC, and supporting activation and deactivation on SCG.

7.5.14.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.5.14.0.

The normative reference for this requirement is TS.38.133 [6] clause 8.17.3.

7.5.14.1.4 Test description 7.5.14.1.4.1 Initial conditions This test shall be run in one of the configurations defined in Table 7.5.14.1.4.1-1.Table 7.5.14.1.4.1-1: Supported test configurations for FR2 PSCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.5.14.1.4.1-2.

Table 7.5.14.1.4.1-2: Initial conditions for FR2 PSCell activation case

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.5.14.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.5.14.1.4.1-3.

2. Message contents are defined in clause 7.5.14.1.4.3.

3. There are two NR carriers and 2 NR Cells specified in the test. Cell 1 is the PCell and Cell 2 is PSCell. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.

Table 7.5.14.1.4.1-3: General test parameters for FR2 PSCell activation case

TBD

7.5.14.1.4.2 Test procedure

At the beginning of T1 the UE is configured with a PSCell which is activated. At T1 the PSCell is deactivated. PSCell is configured with *bfd-and-RLM* with value *true*.

An RRC message for activation of PSCell is sent by the test equipment 1s after the RRC message deactivating the PSCell, in a slot # denoted m. The point in time at which the RRC message for activation of PSCell is received at the UE defines the start of time period T2.

During T2, the test equipment monitors for SR from the UE on the PSCell. The time when test equipment receives a scheduling request from the UE is denoted as slot T3.

Time period T4 starts when an RRC message for deactivation of the PSCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of the PSCell, respectively.

The test equipment verifies the activation time by when the SR from the UE is received in the activated PSCell.

The test equipment verifies the deactivation time by counting the slots from the time when the PSCell deactivation command is sent until UL transmission from the PSCell is discontinued.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR-DC*, DC bearer MCG and SCG, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Tables 7.5.14.1.5-1 and 7.5.14.1.5-2. T1 starts.
3. T1 starts. Immediately after, the SS shall transmit *RRCReconfiguration* message with condition DeactivatedSCG according to TS 38.508-1[14] Table 4.6.1-13 to deactivate NR cell (PSCell).
4. The UE shall transmit *RRCReconfigurationComplete* message. After 1s, the SS should transmit *RRCReconfiguration* message to activate PSCell.
5. The UE shall transmit an RRCConnectionReconfigurationComplete message. T2 starts.
6. The UE shall send SR on PUCCH for PSCell in the first available uplink SR resource no later than T3, otherwise increase the number of failed iterations by one, switch off the UE and continue with step 11. T3 starts.
7. During T3 the UE shall send at least one CSI report for PSCell with non-zero CQI index, otherwise increase the number of failed iterations by one, switch off the UE and continue to step 11.
8. The SS shall transmit *RRCReconfiguration* message with condition DeactivatedSCG according to TS 38.508-1[14] Table 4.6.1-13 to deactivated NR cell (PSCell) after the UE has send at least one CQI report with non-zero CQI index for PSCell (Cell 2) during T3.
9. The UE shall transmit an *RRCReconfigurationComplete* message. T4 starts.
10. The UE shall stop sending PUSCH for PSCell no later than in slot n + $\frac{T_{RRC_delay}}{NR\ slot\ length}$ into T4, if so increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE.
11. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for the next iteration of the test procedure loop.
12. If the UE is not switched off, the SS shall transmit an *RRCRelease* message to release the RRC connection then, the SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State RRC_CONNECTED with generic parameter Connectivity *NR-DC*. If paging succeeds, go to step 14, otherwise switches off the UE.

13. Switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR-DC* with Test Mode On according to TS 38.508-1 [14] clause 4.5.

14. Repeat step 2-13 until a test verdict has been achieved.

7.5.14.1.4.3 Message contents Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 7.5.14.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table 4.6.3-19 in TS 38.508-1 [14] with condition RLM_BFD_PSCell Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition SSB.3 FR2 and SMTC.1

Table 7.5.14.1.4.3-2: *SchedulingRequestResourceConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-157			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequestResourceConfig ::= SEQUENCE {			
schedulingRequestResourceId	SchedulingRequestResourceId		
schedulingRequestID	SchedulingRequestId		
periodicityAndOffset CHOICE {			
sl80	9	With SCS = kHz120 results in repetition every 10 ms	SCS120
}			
}			

7.5.14.1.5 Test requirement Table 7.5.14.1.5-1 and Table 7.5.14.1.5-2 define the primary level settings including test tolerances.

Table 7.5.14.1.5-1: Cell specific test parameters for FR2 PSCell activation case

Parameter[Note 5]		Unit	Cell 1				Cell 2			
			T1	T2	T3	T4	T1	T2	T3	T4
SSB ARFCN			Freq1				Freq2			
Duplex mode	Config 1		FDD				TDD			
	Config 2,3		TDD							
TDD configuration	Config 1		Not Applicable				TDDConf.3.1			
	Config 2		TDDConf.1.1							
	Config 3		TDDConf.2.1							
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1							
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1							
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1							
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1							
TRS configuration	Config 1,2,3		N/A				TRS.2.1 TDD			
TCI state	Config 1,2,3		TCI.State.0							
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52				100: $N_{RB,c}$ = 66			
	Config 3		40: $N_{RB,c}$ = 106							
Data RBs allocated	Config 1,2		52	66	66	52	66	52	52	66
	Config 3		106			106		106	106	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD				-			
	Config 2		SR.1.1 TDD							
	Config 3		SR.2.1 TDD							
	Config 1		CR.1.1 FDD				-			

RMSI CORESET Parameters	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
OCNG Patterns			OP.1	
SSB configuration	Config 1,2		SSB.1 FR1	SSB.3 FR2
	Config 3		SSB.2 FR1	
CSI-RS configuration for CSI reporting	Config 1~3		N/A	CSI-RS.3.1 TDD
reportConfigType for CSI reporting			periodic	N/A
reportConfigType for L1-RSRP			periodic	N/A
reportQuantity for CSI reporting			cri-RI-PMI-CQI	N/A
reportQuantity for L1-RSRP			ssb-Index-RSRP	N/A
CSI reporting periodicity	Config 1,2	slot	5	N/A
	Config 3		10	
L1-RSRP reporting periodicity Note 7	Config 1,2	slot	5	N/A
	Config 3		10	
CSI reporting offset	Config 1,2	slot	2	N/A
	Config 3		4	
L1-RSRP reporting offset	Config 1,2	slot	2	N/A
	Config 3		4	
SMTC configuration			SMTC.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation conditions			N/A Link only, see clause A.3.7A	AWGN
Scheduling request resource periodicity		ms	N/A	20

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void
Note 5: All parameters apply for configuration 1, 2 and 3
Note 6: Void.
Note 7: L1-RSRP measurement and reporting are configured to the UE prior to the start of time period T1.

Table 7.5.14.1.5-2: OTA related test parameters for FR1 PCell with FR2 PSCell activation case

Parameter		Unit	Cell 1				Cell 2			
			T1	T2	T3	T4	T1	T2	T3	T4
Angle of arrival configuration			N/A				According to clause A.3.15.1			
Assumption for UE beams Note 7			N/A				Rough			
N_{oc} Note 1	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A				-103.8			
N_{oc} Note 1	Config 1,2,3	dBm/SCS					-94.8			
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB					7			

Ê . ⁄ ı „	Config 1,2,3	dB		7
SSB_RP Note 2, Note 4	Config 1,2,3	dBm/SCS		-87.8
Io Note 2, Note 4	Config 1,2,3	dBm/95.04 MHz		-58

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Void
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

During T2 the UE shall send the first SR on PSCell in the first available uplink SR resource no later than T3 which is:

$T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2$ ms

where

$T_{processing}$ = 5ms (no RRC parameter has been modified),

T_{search} = 0ms (RACH-less based PSCell activation, with RLM and BFD are configured, PSCell and TCI state are known), and

T_{Δ} = 20ms.

This allows T3 of [$T_{RRC_delay} + T_{IU}$ + 27]ms.

During T4 the UE shall stop all transmissions on the PSCell no later than in slot n + $\frac{T_{RRC_delay}}{NR\ slot\ length}$ as defined in 8.17.3.

During T2 the interruption of PCell during PSCell activation shall not happen outside the slot $m + T_{RRC_delay}$.

During T4 the interruption of PCell during PSCell deactivation shall not happen outside the slot $n + T_{RRC_delay}$.

The interruption duration on PCell due to activation and deactivation of PSCell shall not be more than the values specified for in Clause 8.17.2 and 8.17.3 in TS 38.133 [6].

7.6 Measurement procedures

7.6.1 Intra-frequency measurements

7.6.1.0 Minimum conformance requirements

7.6.1.0.1 Minimum conformance requirements for event-triggered measurement without gap

[TS 38.133, clause 9.2.5.1 and 9.2.5.2]

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell*is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})\ ms$$

Where:

T_{PSS/SSS_sync_intr}: it is the time period used in PSS/SSS detection given in table 7.6.1.0.1-1.

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 7.6.1.0.1-2.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in TS 38.133 [6] clause 9.1.5.1 for measurement conducted outside measurement gaps.

$M_{pss/sss_sync_w/o_gaps}$: For a UE supporting FR2 power class 1, $M_{pss/sss_sync_w/o_gaps}$ = 40. For a UE supporting power class 2, $M_{pss/sss_sync_w/o_gaps}$ = 24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync_w/o_gaps}$ = 24. For a UE supporting FR2 power class 4, $M_{pss/sss_sync_w/o_gaps}$ =24

$M_{meas_period_w/o_gaps}$: For a UE supporting power class 1, $M_{meas_period_w/o_gaps}$ = 40. For a UE supporting FR2 power class 2, $M_{meas_period_w/o_gaps}$ = 24. For a UE supporting power class 3, $M_{meas_period_w/o_gaps}$ = 24. For a UE supporting power class 4, $M_{meas_period_w/o_gaps}$ = 24.

When intra-frequency SMTC is fully non-overlapping with measurement gaps or intra frequency SMTC is fully overlapping with MGs, Kp=1.

When intra-frequency SMTC is partially overlapping with measurement gaps, Kp = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP

For FR2 when any of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting outside measurement gap is fully overlapping with intra-frequency SMTC, $K_{layer1_measurement}$= 1.5, otherwise $K_{layer1_measurement}$=1.

Table 7.6.1.0.1-1: Time period for PSS/SSS detection (Frequency range FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x $M_{pss/sss_sync_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 7.6.1.0.1-2: Measurement period for intra-frequency measurements without gaps (Frequency FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, ceil($M_{meas_period_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x $M_{meas_period_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil($M_{meas_period_w/o_gaps}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

[TS 38.133, clause 9.2.4.3]

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in TS 38.133 [6] clause 10.1.2.1, 10.1.7.1 and 10.1.12.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty

is: 2 x TTI_{DCCH}.This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ without\ index}$ defined in TS 38.133 [6] clause 9.2.5.1. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period than $T_{identify\ intra\ without\ index}$ defined in TS 38.133 [6] clause 9.2.5.1 becomes undetectable for a period and then the cell becomes detectable again and triggers an event, the event triggered measurement reporting delay shall be less than $T_{Measurement_Period,\ Intra}$ provided the timing to that cell has not changed more than ± 3200 Tc while the measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

[TS 38.133, clause 9.2.2]

The requirements given above apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] sections 10.1.2 are fulfilled for a corresponding Band,
- SS-RSRQ related side conditions given in TS 38.133 [6] sections 10.1.7 are fulfilled for a corresponding Band,
- SS-SINR related side conditions given in TS 38.133 [6] sections 10.1.12 are fulfilled for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.2 for a corresponding Band.

References: The conformance requirements covered in the current TC are specified in: TS 38.133 [6], clauses 9.2.2, 9.2.4.3, 9.2.5.1 and 9.2.5.2.

7.6.1.0.2 Minimum conformance requirements for event-triggered measurement with gap

[TS 38.133 [6], clause 9.2.6.2, 9.2.6.3]

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}\ ms$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 7.6.1.0.2-1.

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 7.6.1.0.2-2.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in TS 38.133 [6] section 9.1.5.2.2 for measurement conducted within measurement gaps.

$M_{pss/sss_sync_with_gaps}$: For a UE supporting FR2 power class 1, $M_{pss/sss_sync\ with_gaps}$=40. For a UE supporting FR2 power class 2, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting power class 4, $M_{pss/sss_sync\ with_gaps}$ =24

$M_{meas_period_ with_gaps}$: For a UE supporting power class 1, $M_{meas_period_ with_gaps}$ =40. For a UE supporting power class 2, $M_{meas_period_ with_gaps}$ =24. For a UE supporting power class 3, $M_{meas_period_ with_gaps}$ =24. For a UE supporting power class 4, $M_{meas_period\ with_gaps}$ =24.

Table 7.6.1.0.2-1: Time period for PSS/SSS detection (Frequency range FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, $M_{pss/sss_sync_with_gaps}$ x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x $M_{pss/sss_sync_with_gaps}$) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$

DRX cycle>320ms	$M_{pss/sss_sync_with_gaps}$ x max(MGRP, DRX cycle) x $CSSF_{intra}$

Table 7.6.1.0.2-2: Measurement period for intra-frequency measurements with gaps (Frequency Range FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, $M_{meas_period\ with_gaps}$ x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x $M_{meas_period\ with_gaps}$) x max(MGRP, SMTC period, DRX cycle)) Note 1 x $CSSF_{intra}$
DRX cycle>320ms	$M_{meas_period\ with_gaps}$ x max(MGRP, DRX cycle) x $CSSF_{intra}$

[TS 38.133 [6], clause 9.2.2]

The requirements given above apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] sections 10.1.2 are fulfilled for a corresponding Band,
- SS-RSRQ related side conditions given in TS 38.133 [6] sections 10.1.7 are fulfilled for a corresponding Band,
- SS-SINR related side conditions given in TS 38.133 [6] Sections 10.1.12 are fulfilled for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.2 for a corresponding Band.

[TS 38.133 [6], clause 9.2.4.2]

The RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clauses 10.1.2.1.1 and 10.1.2.1.2, the RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clauses 10.1.7.1.1, and the SINR measurement accuracy for all measured cells shall be as specified in the TS 38.133 [6] clause 10.1.12.1.1.

Reported RSRP, RSRQ and SINR measurements contained in event triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.1.2.1.1, 10.1.2.1.2, 10.1.7.1.1 and 10.1.12.1.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify_intra_without_index}$ defined in TS 38.133 [6] section 9.2.6.2. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clauses 9.2.2, 9.2.4.2, 9.2.6.2 and 9.2.6.3.

7.6.1.1 NR SA FR2 event-triggered reporting without gap in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC1, PC3

This test case is incomplete for UE power classes other than PC1 and PC3

This test case is incomplete for test frequencies > 40.8 GHz

7.6.1.1.1 Test purpose

The purpose of this test is to verify the UE's ability to make a correct reporting of an event within intra-frequency cell search without gap under non-DRX. This test will partly verify the TDD intra-frequency cell search requirements defined in TS 38.133 clause 9.2.5.1 and 9.2.5.2

7.6.1.1.2 Test applicability

This test applies to all types of NR UE release 15 onwards.

7.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.1.1.

7.6.1.1.4 Test description

7.6.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.1.1.4.1-1.

Table 7.6.1.1.4.1-1: Supported test configurations for NR SA FR2 event-triggered reporting without gap in non-DRX

Test Case ID	Description
7.6.1.1-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.6.1.1-2	240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 7.6.1.1.4.1-2.

Table 7.6.1.1.4.1-2: Initial conditions for NR SA FR2 event-triggered reporting without gap in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell and neighbour cell are given in Table 7.6.1.1.4.1-3 below.
2. Message contents are defined in clause 7.6.1.1.4.3.
3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.6.1.1.4.1-3: General test parameters for NR SA FR2 event-triggered reporting without gap in non-DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1	

A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

7.6.1.1.4.2 Test procedure

Two cells are deployed in the test, which are FR2 PCell (NR Cell 1) and a FR2 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 7.6.1.1.4.1-3 and Table 7.6.1.1.5-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.1.1.5-1. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.1.1.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than X ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X is

   - 2402 ms for UE supporting power class 1,

   - 1442 ms for UE supporting power class 2, 3 or 4,

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall transmit an *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set NR Cell 2 physical cell identity = ((current NR Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. After the RRC connection release, the SS:
   - transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   or
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.6.1.1.4.3-1: Common Exception messages for NR SA FR2 event-triggered reporting without gap in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with A3-offset = -11dB Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM

Table 7.6.1.1.4.3-2: MeasObjectNR (Step 3, test procedure)

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO, Synchronous cells and NOT SS-SINR			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
ssbSubcarrierSpacing	SubcarrierSpacing specified in 38.508-1 [14] Table 7.3.1-3a with condition SSB.3 FR2		7.6.1.1-1,
	SubcarrierSpacing specified in 38.508-1 [14] Table 7.3.1-3a with condition SSB.4 FR2		7.6.1.1-2,
smtc1	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
cellsToAddModList SEQUENCE (SIZE (1..maxNrofCellMeas)) OF CellsToAddMod {	1 entry		
CellsToAddMod[1] SEQUENCE {		entry 1	
physCellId	PhysCellId of Cell 2		
cellIndividualOffset SEQUENCE {			
rsrpOffsetSSB	dB16		
rsrqOffsetSSB	Not present		
sinrOffsetSSB	Not present		
rsrpOffsetCSI-RS	Not present		
rsrqOffsetCSI-RS	Not present		
sinrOffsetCSI-RS	Not present		
}			
}			
}			
}			

7.6.1.1.5 Test requirement

Table 7.6.1.1.4.1-3, Table 7.6.1.1.5-1 and Table 7.6.1.1.5-2 define the primary level settings including test tolerances for NR SA FR2 event-triggered reporting without gap in non-DRX.

Table 7.6.1.1.5-1: NR Cell specific test parameters for NR SA FR2 event-triggered reporting without gap in non-DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	

Active UL BWP configuration		1, 2	ULBWP.1.1	ULBWP.1.1
RLM-RS		1, 2	SSB	SSB
PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
		2	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2	CCR.3.7 TDD	N/A
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1, 2	TCI.state.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.5	N/A
cellIndividualOffset	dB	1~2	N/A	16
SSB		1	SSB.3 FR2	SSB.7 FR2
		2	SSB.4 FR2	SSB.8 FR2
Propagation Condition		1, 2	No external noise (Note 1)	
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].				

Table 7.6.1.1.5-2: NR OTA Cell specific test parameters for NR SA FR2 event-triggered reporting without gap in non-DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.9.3			
			AoA1		AoA2	
Beam assumption[Note 4]		1,2	Rough		Rough	
E_s	dBm/SCS	1	-89		-89	
		2	-86		-86	
$\hat{E}_s / I_{ot}$ BB [Note 5]	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-64.41	-64.41	-Infinity	-64.41
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure 7.6.1.1.5-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation						
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.						

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1,

- 1.44s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

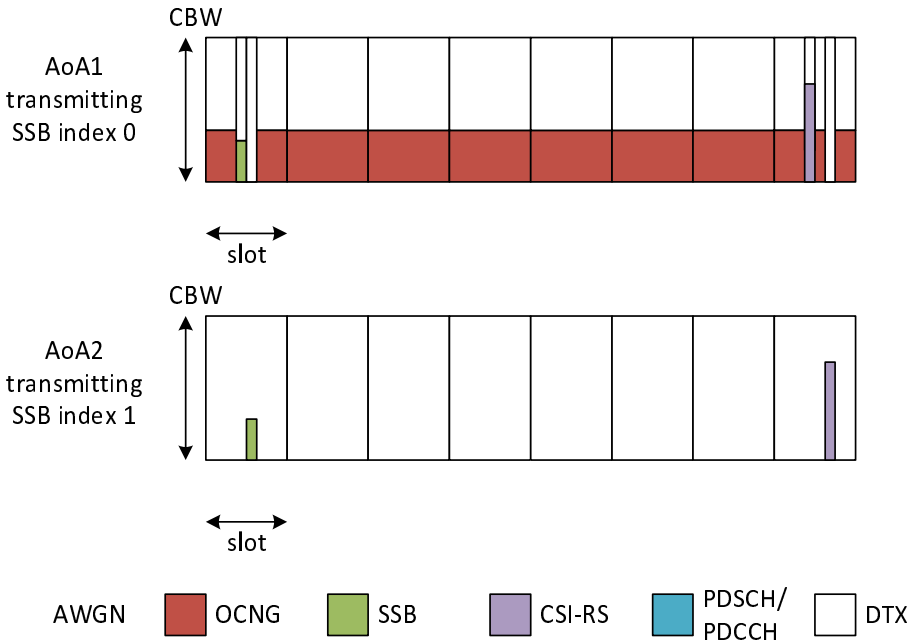

Figure 7.6.1.1.5-1: Time multiplexed downlink transmissions (Config 1 example)

7.6.1.2 NR SA FR2 event-triggered reporting without gap in DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC1, PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC1 and PC3.

7.6.1.2.1 Test purpose

Ther purpose of this test is to verify the UE's ability to make a correct reporting of an event within intra-frequency cell search without gap under DRX. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 clause 9.2.5.1 and 9.2.5.2.

7.6.1.2.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR2 and long DRX cycle.

7.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.1.2.

7.6.1.2.4 Test description

7.6.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.1.2.4.1-1.

Table 7.6.1.2.4.1-1: Supported test configurations for NR SA FR2 event-triggered reporting without gap in DRX

Test Case ID	Description
7.6.1.2-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.6.1.2-2	240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 7.6.1.2.4.1-2.

Table 7.6.1.2.4.1-2: Initial conditions for NR SA FR2 event-triggered reporting without gap in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell and neighbour cell are given in Table 7.6.1.2.4.1-3 below.
2. Message contents are defined in clause 7.6.1.2.4.3.
3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.6.1.2.4.1-3: General test parameters for NR SA FR2 event-triggered reporting without gap in DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	PCell (Cell 1)		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1		
A3-Offset	dB	1, 2	-7[Note 1]		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX. 7	
Time offset between Cell 1 and Cell 2		1, 2	3 μs		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	10	52	
Note 1: Including test tolerance given in Annex F.1.3.2					

7.6.1.2.4.2 Test procedure

Two cells are deployed in the test, which are FR2 PCell (NR Cell 1) and a FR2 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 7.6.1.2.4.1-3, Table 7.6.1.2.5-1 and Table 7.6.1.2.5-2, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.1.2.5-1 and Table 7.6.1.2.5-2. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.1.2.5-1 and Table 7.6.1.2.5-2. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than X ms for sub-test 1 or less than Y ms for sub-test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X is

   - 7202 for UE supporting power class 1,

   - 4322 for UE supporting power class 2, 3 or 4.

   and Y is

   - 51202 for UE supporting power class 1,

   - 30722 for UE supporting power class 2, 3 or 4.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall transmit an *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set NR Cell 2 physical cell identity = ((current NR Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. After the RRC connection release, the SS:
   - transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   or
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 7.6.1.2.4.1-1 as appropriate.

7.6.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.1.2.4.3-1: Common Exception messages for NR SA FR2 event-triggered reporting without gap in DRX

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ Table H.3.1-3 with Condition INTRA-FREQ MO, Synchronous cells and NOT SS-SINR Table H.3.1-4 with A3-offset = -7dB Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM Table H.3.7-1 with Condition DRX.1 for sub-test 1 Table H.3.7-1 with Condition DRX.7 for sub-test 2 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Test Configuration 7.6.1.2-1	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.3 FR2
Specific message contents exceptions for Test Configuration 7.6.1.2-2	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.4 FR2

7.6.1.2.5 Test requirement

Table 7.6.1.2.4.1-3, Table 7.6.1.2.5-1 and Table 7.6.1.2.5-2 define the primary level settings including test tolerances for NR event triggered reporting in synchronous cells when DRX is used test.

Table 7.6.1.2.5-1: NR Cell specific test parameters for NR SA FR2 event-triggered reporting without gap in DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
PDSCH RMC configuration		1	SR.3. 2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.2 TDD		CR.3.2 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.7 TDD		CCR.3.7 TDD	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.state.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120		120	
OCNG Patterns		1, 2	OP.1		OP.1	
SSB		1	SSB.3 FR2		SSB.3 FR2	
		2	SSB.4 FR2		SSB.4 FR2	
Propagation Condition		1, 2	AWGN			

Table 7.6.1.2.5-2: NR OTA Cell specific test parameters for NR SA FR2 event-triggered reporting without gap in DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 1 defined in A.9			
Beam assumption Note 4		1,2	Rough			
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	3.51	-1.60	-Infinity	-1.60
N_{oc} Note 2	dBm/15 KHz	1, 2	-101.5 Note 6			
N_{oc} Note 2	dBm/SCS	1	-92.5			
		2	-89.5			
SSB_RPSS-RSRP	dBm/SCS	1	-88.47	-88.47	-Infinity	-88.47
		2	-85.47	-85.47	-Infinity	-85.47
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
Io	dBm/95.04MHz	1	-58.03	-55.68	-58.03	-55.68

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 6: Including test tolerance given in Annex F.1.3.2

In Test 1 when DRX cycle length = 40 ms, the overall delay measured is defined as the time from the beginning of time period T2 to the moment the UE send one Event A3 triggered measurement report on PUSCH.

In Test 2 when DRX cycle length = 640 ms, the overall delay measured is defined as the time from the beginning of time period T2 to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report to NR Cell 2 on PUSCH.

For both tests:

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The overall delays measured is defined as the time from the beginning of time period T2 to the moment the UE send one Event A3 triggered measurement report to NR Cell 2.

The overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delay measured when DRX cycle length is 40 ms (sub-test 1) is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})$ ms

For UE supporting power class 1, T_{PSS/SSS_sync_intra} = 3600 ms, $T_{SSB_measurement_period_intra}$= 3600 ms,

For UE supporting power class 2, 3 or 4, T_{PSS/SSS_sync_intra} = 2160 ms, $T_{SSB_measurement_period_intra}$= 2160 ms

TTI insertion uncertainty = 2 ms

The overall delay measured when DRX cycle length is 40 ms shall be less than a total of X ms, where X is

- X = 7202 for UE supporting power class 1,

- X = 4322 for UE supporting power class 2, 3 or 4,

The overall delay measured when DRX cycle length is 640 ms (sub-test 2) is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index}$ = (T_{PSS/SSS_sync_intra} + $T_{SSB_measurement_period_intra}$) ms

For UE supporting power class 1, T_{PSS/SSS_sync_intra} = 25600 ms, $T_{SSB_measurement_period_intra}$= 25600 ms,

For UE supporting power class 2, 3 or 4, T_{PSS/SSS_sync_intra} = 15360 ms, $T_{SSB_measurement_period_intra}$= 15360 ms

TTI insertion uncertainty = 2 ms

The overall delay measured when DRX cycle length is 640 ms shall be less than a total of X ms, where

- X = 51202 for UE supporting power class 1,

- X = 30722 for UE supporting power class 2, 3 or 4,

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

7.6.1.3 NR SA FR2 event-triggered reporting with gap in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC1, PC3

This test case is incomplete for UE power classes other than PC1 and PC3

This test case is incomplete for test frequencies > 40.8 GHz

7.6.1.3.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting of an event with gaps under non-DRX within intra-frequency cell search with gaps requirements. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 clause 9.2.5.1 and 9.2.5.2.

7.6.1.3.2 Test applicability

This test applies to all types of NR UE release 15 onwards and supporting CSI-RS based RLM and BWP operation without bandwidth restriction.

7.6.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.1.3.

7.6.1.3.4 Test description

7.6.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.1.3.4.1-1.

Table 7.6.1.3.4.1-1: Supported test configurations for NR SA FR2 event-triggered reporting with gap in non-DRX

Test Case ID	Description

7.6.1.3-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.6.1.3-2	240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 7.6.1.3.4.1-2.

Table 7.6.1.3.4.1-2: Initial conditions for NR SA FR2 event-triggered reporting with gap in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.6.1.3.4.1-3.
2. Message contents are defined in clause 7.6.1.3.4.3.
3. There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.6.1.3.4.1-3: General test parameters for NR SA FR2 event-triggered reporting with gap in non-DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Gap type		1, 2	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2	40	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	39	
SMTC configuration		1, 2	SMTC.1	
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD **resource #0**	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

7.6.1.3.4.2 Test procedure

Two cells are deployed in the test, which are FR2 PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 7.6.1.3.4.1-3, Table 7.6.1.3.5-1 and 7.6.1.3.5-2, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.1.3.5-1 and Table 7.6.1.3.5-2. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.1.3.5-1 and Table 7.6.1.3.5-2.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than X ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X is

   - X = 3202 for UE supporting power class 1,

   - X = 1922 ms for UE supporting power class 2, 3 or 4,

7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall transmit an *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. After the RRC connection release, the SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   or
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.1.3.4.3-1: Common Exception messages for NR SA FR2 event-triggered reporting with gap in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and GAP NEEDED Table H.3.1-4 with A3-offset = -11dB Table H.3.1-6 with Condition gapUE and Pattern #0 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM

Table 7.6.1.3.4.3-2: MeasObjectNR (Step 3, test procedure)

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO, Synchronous cells and NOT SS-SINR			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			

ssbSubcarrierSpacing	SubcarrierSpacing specified in 38.508-1 [14] Table 7.3.1-3a with condition SSB.3 FR2		7.6.1.3-1,
	SubcarrierSpacing specified in 38.508-1 [14] Table 7.3.1-3a with condition SSB.4 FR2		7.6.1.3-2,
smtc1	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
cellsToAddModList SEQUENCE (SIZE (1..maxNrofCellMeas)) OF CellsToAddMod {	1 entry		
CellsToAddMod[1] SEQUENCE {		entry 1	
physCellId	PhysCellId of Cell 2		
cellIndividualOffset SEQUENCE {			
rsrpOffsetSSB	dB16		
rsrqOffsetSSB	Not present		
sinrOffsetSSB	Not present		
rsrpOffsetCSI-RS	Not present		
rsrqOffsetCSI-RS	Not present		
sinrOffsetCSI-RS	Not present		
}			
}			
}			
}			

Table 7.6.1.3.4.3-3: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition BWP-Id1			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 configuration	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

7.6.1.3.5 Test requirement

Table 7.6.1.3.4.1-3 and Table 7.6.1.3.5-1 define the primary level settings including test tolerances for NR SA FR2 event-triggered reporting with gap in non-DRX test.

Table 7.6.1.3.5-1: NR Cell specific test parameters for NR SA FR2 event-triggered reporting with gap in non-DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2

TDD configuration		1, 2	TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Data RBs allocated		1	24	24
		2	48	48
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Active DL BWP configuration		1, 2	DLBWP.1.2	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.2	ULBWP.1.1
RLM-RS		1, 2	CSI-RS	SSB
PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
		2	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2	CCR.3.7 TDD	N/A
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1, 2	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.5	N/A
cellIndividualOffset	dB	1,2	N/A	16
SSB		1	SSB.3 FR2	SSB.7 FR2
		2	SSB.4 FR2	SSB.8 FR2
Propagation Condition		1, 2	No external noise (Note 1)	
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].				

Table 7.6.1.3.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.9			
			AoA1		AoA2	
Beam Assumption Note 4		1,2	Rough		Rough	
E_s	dBm/SCS	1	-89		-89	
		2	-86		-86	
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	86
Io	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1,2	Defined in Figure 7.6.1.3.5-1			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 5:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

The overall delays measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}$

For UE supporting power class 1, T_{PSS/SSS_sync_intr} = 1600 ms, $T_{SSB_measurement_period_intra}$= 1600 ms,

For UE supporting power class 2, 3 or 4, T_{PSS/SSS_sync_intr} = 960 ms, $T_{SSB_measurement_period_intra}$= 960 ms

TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of X ms in this test case (note: this gives a total of 800 ms for measurement reporting delay plus 2 ms for TTI insertion uncertainty), where

X = 3202 for UE supporting power class 1,

X = 1922 for UE supporting power class 2, 3 or 4,

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

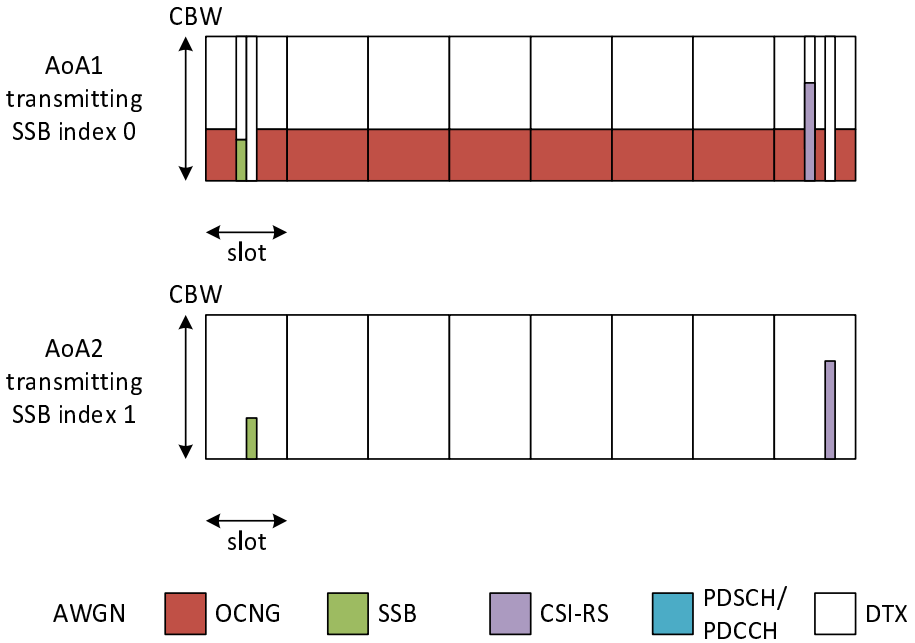

Figure 7.6.1.3.5-1: Time multiplexed downlink transmissions (Config 1 example)

7.6.1.4 NR SA FR2 event-triggered reporting with gap in DRX

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC1, PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC1 and PC3.

7.6.1.4.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting of an event with gaps under DRX within intra-frequency cell search with gaps requirements. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 clause 9.2.5.1 and 9.2.5.2.

7.6.1.4.2 Test applicability

This test applies to all types of NR UE release 15 and forward supporting 5GS NR SA FR2, CSI-RS based RLM and long DRX cycle.

7.6.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.1.4.

7.6.1.4.4 Test description

7.6.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.1.4.4.1-1.

Table 7.6.1.4.4.1-1: Supported test configurations for NR SA FR2 event-triggered reporting with gap in DRX

Test Case ID	Description

7.6.1.4-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.6.1.4-2	240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 7.6.1.4.4.1-2.

Table 7.6.1.4.4.1-2: Initial conditions for NR SA FR2 event-triggered reporting with gap in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.6.1.4.4.1-3.

2. Message contents are defined in clause 7.6.1.4.4.3.

3. There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 7.6.1.4.4.1-3: General test parameters for NR SA FR2 event-triggered reporting with gap in DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	PCell (Cell 1)		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
Gap type		1, 2	Per-UE gaps		
Measurement gap repetition periodicity	ms	1, 2	40		
Measurement gap length	ms	1, 2	6		
Measurement gap offset	ms	1, 2	39		
SMTC configuration		1, 2	SMTC.1		
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD		
A3-Offset	dB	1, 2	-7[Note1]		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX. 7	
Time offset between Cell 1 and Cell 2		1, 2	3 μs		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	10	52	
Note 1: Including test tolerance given in Annex F.1.3.2					

7.6.1.4.4.2 Test procedure

Two cells are deployed in the test, which are FR2 PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 7.6.1.4.4.1-3 and Table 7.6.1.4.4.2-1, respectively. In the measurement control information a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In Test 1 when DRX cycle = 40 ms is used, UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Timer Alignment Timer to keep the UE uplink time alignment. Furthermore, the UE is allocated with PUSCH resource at every DRX cycle. In Test 2 when DRX = 640 ms is used, the uplink time alignment is not maintained and the UE needs to use RACH to obtain uplink allocation for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.1.4.5-1 and Table 7.6.1.4.5-2. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.1.4.5-1 and Table 7.6.1.4.5-2.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than X ms for Test 1 or less than Y ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X and Y is

   - X = 7202, Y = 51202 for UE supporting power class 1,

   - X = 4322, Y = 30722 for UE supporting power class 2, 3 or 4,

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall transmit an *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. After the RRC connection release, the SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   or
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 7.6.1.4.4.1-3 as appropriate.

7.6.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.1.4.4.3-1: Common Exception messages for NR SA FR2 event-triggered reporting with gap in DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, Synchronous cells and NOT SS-SINR Table H.3.1-4 with A3-offset = -7dB Table H.3.1-6 with Condition gapUE and Pattern #0 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM Table H.3.7-1 with Condition DRX.1 and Gap for test 1 Table H.3.7-1 with Condition DRX. 7 and Gap for test 2 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Specific message contents exceptions for Test Configuration 7.6.1.4-1	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.3 FR2
Specific message contents exceptions for Test Configuration 7.6.1.4-2	Table 7.3.1-3a in TS 38.508-1 [14] with condition SSB.4 FR2

Table 7.6.1.4.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition BWP-Id1			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 configuration	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

Condition	Explanation
BWP-Id1	Active BWP (BWP2)

7.6.1.4.5 Test requirement

Table 7.6.1.4.4.1-3 , Table 7.6.1.4.5-1 and Table 7.6.1.4.5-2 define the primary level settings including test tolerances for NR SA FR2 event-triggered reporting with gap in DRX test.

Table 7.6.1.4.5-1: NR Cell specific test parameters for NR SA FR2 event-triggered reporting with gap in DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1, 2	66		66	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	

Active DL BWP configuration		1, 2	DLBWP.1.2	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.2	ULBWP.1.1
RLM-RS		1, 2	CSI-RS	SSB
PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	CR.3.1 TDD
		2	CR.3.2 TDD	CR.3.2 TDD
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	CCR.3.1 TDD
		2	CCR.3.7 TDD	CCR.3.7 TDD
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI state		1, 2	TCI.State.2	N/A
OCNG Patterns		1, 2	OP.1	OP.1
SSB		1	SSB.3 FR2	SSB.3 FR2
		2	SSB.4 FR2	SSB.4 FR2
Propagation Condition		1, 2	AWGN	

Table 7.6.1.4.5-2: NR OTA Cell specific test parameters for NR SA FR2 event-triggered reporting with gap in DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 1 defined in A.9.1			
Beam Assumption Note 4		1,2	Rough			
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	3.51	-1.60	-Infinity	-1.60
N_{oc} Note 2	dBm/15 KHz	1, 2	-101.5 Note 6			
N_{oc} Note 2	dBm/SCS	1	-92.5			
		2	-89.5			
SSB_RPSS-RSRP	dBm/SCS	1	-88.47	-88.47	-Infinity	-88.47
		2	-85.47	-85.47	-Infinity	-85.47
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
Io	dBm/95.04MHz	1	-58.03	-55.68	-58.03	-55.68

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 6: Including test tolerance given in Annex F.1.3.2

In Test 1 when DRX cycle length = 40 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE send one Event A3 triggered measurement report on PUSCH.

In Test 2 when DRX cycle length = 640 ms is used, the overall delay measured is defined as the time from the beginning of time period T2, to the moment the UE starts to send preambles on the PRACH for Scheduling Request (SR) to obtain allocation to send the measurement report on PUSCH.

For both tests:

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 1: The actual overall delays measured in the test may be up to one DRX cycle higher than the measurement reporting delays above because UE is allowed to delay the initiation of the measurement reporting procedure to the next until the Active Time.

NOTE 2: In order to calculate the rate of correct events the system simulator shall verify that it has received correct Event A3 measurement report.

The overall delay measured when DRX cycle length is 40 ms test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})$ ms

For UE supporting power class 1, T_{PSS/SSS_sync_intra} = 7200ms, $T_{SSB_measurement_period_intra}$= 7200 ms,

For UE supporting power class 2, 3 or 4, T_{PSS/SSS_sync_intra} = 2160 ms, $T_{SSB_measurement_period_intra}$= 2160 ms

TTI insertion uncertainty = 2 ms

The overall delay measured when DRX cycle length is 40 ms shall be less than a total of X ms, where X is

- X = 7202 for UE supporting power class 1,
- X = 4322 for UE supporting power class 2, 3 or 4,

The overall delay measured when DRX cycle length is 640 ms test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})$ ms

For UE supporting power class 1, T_{PSS/SSS_sync_intra} = 25600 ms, $T_{SSB_measurement_period_intra}$= 25600 ms,

For UE supporting power class 2, 3 or 4, T_{PSS/SSS_sync_intra} = 15360 ms, $T_{SSB_measurement_period_intra}$= 15360 ms

TTI insertion uncertainty = 2 ms

The overall delay measured when DRX cycle length is 640 ms shall be less than a total of X ms, where

- X = 51202 for UE supporting power class 1,
- X = 30722 for UE supporting power class 2, 3 or 4,

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

7.6.1.5 NR SA FR2 event triggered reporting test without gap in non-DRX for UE configured with *highSpeedMeasFlagFR2-r17*

Editor's note: This test case is incomplete. The following aspects are missing:

- Test tolerance and measurement uncertainty analysis are missing

7.6.1.5.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17* in TS 38.133[6] clauses 9.2.5.1 and 9.2.5.2.

7.6.1.5.2 Test applicability

This test applies to all types of NR UE power class 6 release 17 onwards that support *highSpeedMeasFlagFR2-r17*.

7.6.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.1.5.

7.6.1.5.4 Test description

7.6.1.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.1.5.1-1.

Table 7.6.1.5.4.1-1: Supported test configurations for NR SA FR2 event-triggered reporting without gap in non-DRX for UE configured with *highSpeedMeasFlagFR2-r17*

Configuration	Description
7.6.1.5.4-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.6.1.5.4-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 7.6.1.5.4.1-2.

Table 7.6.1.5.4.1-2: Initial conditions for NR SA FR2 event-triggered reporting without gap in non-DRX for UE configured with *highSpeedMeasFlagFR2-r17*

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.1.5.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell and neighbour cell are given in Table 7.6.1.5.4.1-3 below.
2. Message contents are defined in clause 7.6.1.5.4.3.
3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.
4. The rx beam peak and directions in which the UE meets the EIS spherical coverage criteria have been found with one of the procedures from Annex I.

Table 7.6.1.5.4.1-3: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
highSpeedMeasFlagFR2-r17		1,2	Set2	*highSpeedMeasFlagFR2-r17* = set2 is configured
Active cell		1, 2	PCell (Cell 1)	

Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	[1]	
T2	s	1, 2	[2]	

7.6.1.5.4.2 Test procedure

Two cells are deployed in the test, which are FR2 PCell (NR Cell 1) and a FR2 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 7.6.1.5.4.1-3 and Table 7.6.1.5.5-1, respectively. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.1.5.5-1. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.1.5.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1140 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall transmit an *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set NR Cell 2 physical cell identity = ((current NR Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. After the RRC connection release, the SS:
   - transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   or
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.6.1.5.4.3-1: Common Exception messages for NR SA FR2 event-triggered reporting without gap in non-DRX for UE configured with *highSpeedMeasFlagFR2-r17*

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with A3-offset = -11dB Table H.3.1-7 with Condition INTRA-FREQ Table 4.6.3-169 in 38.508-1 [14] with condition R17 HST FR2
Specific message contents exceptions for Test Configuration 7.6.1.5-1	

7.6.1.5.5 Test requirement

Table 7.6.1.5.4.1-3, Table 7.6.1.5.5-1 and Table 7.6.1.5.5-2 define the primary level settings including test tolerances for NR SA FR2 event-triggered reporting without gap in non-DRX for UE configured with highSpeedMeasFlagFR2-r17.

Table 7.6.1.5.5-1: NR Cell specific test parameters for NR SA FR2 event-triggered reporting without gap in non-DRX for UE configured with *highSpeedMeasFlagFR2-r17*

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2	CCR.3.7 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120		120	
OCNG Patterns		1, 2	OP.5		N/A	
cellIndividualOffset	dB	1~2	N/A		16	
SSB		1	SSB.1 FR2		SSB.7 FR2	
		2	SSB.2 FR2		SSB.8 FR2	
Propagation Condition		1, 2	No external noise (Note 2)		No external noise (Note 2) 19444Hz Note 1	

Note 1: The AWGN 19444 Hz condition is a non-fading propagation channel with one tap. Doppler shift is a constant 19444 Hz.
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

Table 7.6.1.5.5-2: NR OTA Cell specific test parameters for NR SA FR2 event-triggered reporting without gap in non-DRX for UE configured with *highSpeedMeasFlagFR2-r17*

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.9.3			
			AoA1		AoA2	
Beam assumption Note 4		1,2	Rough		Rough	
E_s	dBm/SCS	1	-89+TT	-89+TT	-Infinity	-89+TT
		2	-86+TT	-86+TT	-Infinity	-86+TT
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12+TT	-0.12+TT	-Infinity	-0.12+TT
SSB_RP	dBm/SCS	1	-89+TT	-89+TT	-Infinity	-89+TT
		2	-86+TT	-86+TT	-Infinity	-86+TT
Io	dBm/95.04MHz	1	-64.41+TT	-64.41+TT	-Infinity	-64.41+TT
		2	-61.41+TT	-61.41+TT	-Infinity	-61.41+TT
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure 7.6.1.1.5-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 1140ms for a UE supporting power class 6

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.2 Inter-frequency measurements

7.6.2.0 Minimum conformance requirements for Inter-frequency measurements

7.6.2.0.1 Minimum conformance requirements for Inter-frequency measurement with measurement gaps

Same as clause 5.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause 9.3.2, 9.3.4, 9.3.5, 9.3.6.3.

7.6.2.0.2 Minimum conformance requirements for Inter-frequency measurement without measurement gaps

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$. It is assumed that when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2, the following condition is met:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned

$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter})$ ms

$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter})$ ms

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 7.6.2.0.2-1.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 7.6.2.0.2-2.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 7.6.2.0.2-3.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in TS 38.133 [6] clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when interfrequency SMTC is fully non overlapping or partially overlapping with measurement gaps or according to $CSSF_{within_gap,i}$ in TS 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps, i.e. when interfrequency SMTC is fully overlapping with measurement gaps.

M_{pss/sss_sync_inter}: For a UE supporting FR2 power class 1, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2 power class 2, M_{pss/sss_sync_inter} = 24 samples. For a UE supporting FR2 power class 3, M_{pss/sss_sync_inter} = 24 samples. For a UE supporting FR2 power class 4, M_{pss/sss_sync} = 24 samples.

$M_{meas_period_inter}$: For a UE supporting FR2 power class 1, $M_{meas_period_inter}$ =40 samples. For a vehicle mounted UE supporting FR2 power class 2, $M_{meas_period_inter}$ =24 samples. For a UE supporting FR2 power class 3, $M_{meas_period_inter}$ =24 samples. For a UE supporting FR2 power class 4, $M_{meas_period_inter}$ = 24 samples.

When interfrequency SMTC is fully non overlapping with measurement gaps or interfrequency SMTC is fully overlapping with MGs, Kp=1.

When interfrequency SMTC is partially overlapping with measurement gaps, Kp = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP.

For FR2,

$K_{layer1_measurement}$=1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by inter-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by inter-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by *SSB-ToMeasure* and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

Table 7.6.2.0.2-1: Time period for PSS/SSS detection, (FR1)

DRX cycle	T_{PSS/SSS_sync_inter}
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 7.6.2.0.2-2: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_inter}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{inter}$
DRX cycle≤ 320ms	max(120ms, ceil (1.5 x 3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

The UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in TS 38.133 [6] clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 7.6.2.0.2-3, if UE supports inter-frequency measurement without measurement gaps:

Table 7.6.2.0.2-3: Measurement period for inter-frequency measurements without gaps ((FR1)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE is required to be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols to be measured in the following clauses are the SSB symbols indicated by SSB-ToMeasure [2], if it is configured; otherwise, all L SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

The scheduling availability requirements when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2 in TS 38.133 [6] clause 9.3.9.3.1~9.3.9.3.3 are valid under the following conditions:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned, and

The following scheduling restriction applies due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell

> The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 inter-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell should also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

If following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE is expected to receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

7.6.2.0.3 Minimum conformance requirements for event triggered reporting using MUSIM gap

Same as clause 6.6.1.0.6.

7.6.2.1 NR SA FR2-FR2 event-triggered reporting in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

7.6.2.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

7.6.2.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.1.

7.6.2.1.4 Test description

7.6.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.1.4.1-1.

Table 7.6.2.1.4.1-1: NR FR2-FR2 event triggered reporting tests in non-DRX supported test configurations

Test Case ID	Description
7.6.2.1-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note 1: Void	

Table 7.6.2.1.4.1-1: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5.2 for PC1; 3.5 for other PC	

Table 7.6.2.1.4-3: Test Environment parameters for SA inter-frequency event triggered reporting without SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.2.1.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

3. The AoA setup for this test is Setup 3 as defined in clause A.9 The UE RX spherical coverage direction has been obtained previously using one of the search procedures as described in Annex I.

7.6.2.1.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.2.1.4.1-2. The TE shall ensure that the NR FR2 cells are from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] and relative angular offset between active probes are according to Table A.9.3-1. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.1.4.1-2. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 5122 ms for UE supporting power class 1, or 3202 ms for UE supporting other power class, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. TE shall change the active probes in such way that relative angular offset between active probes differs in the following iteration.

10. After the RRC connection release, the SS:

    - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
      or:

    - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.2.1.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4 with A3-offset = -11dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE and Pattern #13 Table H.3.1-7 with Condition INTER-FREQ

Table 7.6.2.1.4.3-2: MeasObjectNR-DEFAULT: SA FR2-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB16		
}			

7.6.2.1.5 Test requirement

Table 7.6.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.2.1.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.9			
				AoA1		AoA2	
Assumption for UE beams[Note 7]			Config 1,2	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							

EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_S$	dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSB-RP Note 3	dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1	1.89	1.89	-Infinity	1.89
Io Note3	dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1	No external noise (Note 9)		No external noise (Note 9)	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SSB-RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in TS 38.133 [6] Annex B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 5122 ms in this test for power class UE and 3202 ms for other power classes.

7.6.2.2 NR SA FR2-FR2 event-triggered reporting in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.6.2.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

7.6.2.2.2 Test applicability

This test applies to all types of NR UE Release 15 and forward supporting 5GS NR SA FR2 and long DRX cycle.

7.6.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.2.

7.6.2.2.4 Test description

7.6.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.2.4.1-1.

Table 7.6.2.2.4.1-1: NR FR2-FR2 event triggered reporting tests in DRX supported test configurations

Test Case ID	Description
7.6.2.2-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note 1: Void	

Table 7.6.2.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-12		Value modified by TT
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3µs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table 7.6.2.2.4-3: Test Environment parameters for SA inter-frequency event triggered reporting without SSB time index detection in DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.	
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.2.4.1-1.	

Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.2.2.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

3. The UE Rx beam peak direction for Cell 2 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

7.6.2.2.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.2.2.4.1-2. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.2.4.1-2.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 7682 ms for UE supporting power class 1, or 4802 ms for UE supporting other power class for Test 1 and 81922 ms for UE supporting power class 1, or 51202 ms for UE supporting other power class for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 7.6.2.2.4.1-2 as appropriate.

7.6.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.2.2.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4 with A3-offset = -12dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE and Pattern #13 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 for Test 1 and DRX.2 for Test 2

7.6.2.2.5 Test requirement

Table 7.6.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Table A.7.6.2.2.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.9			
Beam Assumption[Note 7]			Config 1	Rough			
NR RF Channel Number			Config 1	1		2	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
SSB_RP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in TS 38.133 Annex B.2.1.3, and does not limit UE implementation or test system implementation

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 7682 ms for power class 1 UE and 4802 ms for other power classes in test 1 and 81922 for power class 1 UE and 51202 ms for other power classes in test 2.

7.6.2.3 NR SA FR2-FR2 event-triggered reporting in non-DRX with SSB time index detection

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.6.2.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

7.6.2.3.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.6.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.3.

7.6.2.3.4 Test description

7.6.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.3.4.1-1.

Table 7.6.2.3.4.1-1: NR FR2-FR2 event triggered reporting tests in non-DRX with SSB time index detection supported test configurations

Test Case ID	Description
7.6.2.3-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note 1: Void	

Table 7.6.2.3.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used

Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	7 for PC1; 4.5 for other PC	

Table 7.6.2.3.4-3: Test Environment parameters for SA inter-frequency event triggered reporting with SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.2.3.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

3. The AoA setup for this test is Setup 3 as defined in clause A.9. The UE RX spherical coverage direction has been obtained previously using one of the search procedures as described in Annex I.

7.6.2.3.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.2.3.4.1-2. The TE shall ensure that the NR FR2 cells are from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] and relative angular offset between active probes are according to Table A.9.3-1. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.3.4.1-2. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 6722 ms for UE supporting power class 1, or 4162 ms for UE supporting other power class, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. TE shall change the active probes in such way that relative angular offset between active probes differs in the following iteration.10. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.2.3.4.3-1: Common Exception messages SA inter frequency event triggered reporting with SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4 with Condition SSB Index and A3-offset = -11dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE and Pattern #13 Table H.3.1-7 with Condition INTER-FREQ

Table 7.6.2.3.4.3-2: MeasObjectNR-DEFAULT: SA FR2-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB16		
}			

7.6.2.3.5 Test requirement

Table 7.6.2.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.2.3.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1	Setup 3 as specified in clause A.9			
			AoA1		AoA2	
Beam Assumption[Note 7]		Config 1	Rough		Rough	
NR RF Channel Number		Config 1	1		2	
Duplex mode		Config 1	TDD		TDD	
TDD configuration		Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	

Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
$\hat{E}_s$		dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSB-RP Note 3		dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8		dB	Config 1	1.89	1.89	-Infinity	1.89
Io Note3		dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	No external noise (Note 9)		No external noise (Note 9)	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SSB-RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in TS 38.133 [6] Annex B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

The UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 6722 ms in this test for power class UE and 4162 ms for other power classes.

7.6.2.4 NR SA FR2-FR2 event-triggered reporting in DRX with SSB time index detection

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.6.2.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

7.6.2.4.2 Test applicability

This test applies to all types of NR UE Release 15 and forward supporting 5GS NR SA FR2 and long DRX cycle.

7.6.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.4.

7.6.2.4.4 Test description

7.6.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.4.4.1-1.

Table 7.6.2.4.4.1-1: NR FR2-FR2 event triggered reporting tests in DRX with SSB time index detection supported test configurations

Test Case ID	Description
7.6.2.4-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note 1: Void	

Table 7.6.2.4.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection in DRX

Parameter	Unit		Value	Comment

		Test configuration	Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-12		Value modified by TT
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

Table 7.6.2.4.4-3: Test Environment parameters for SA inter-frequency event triggered reporting with SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.2.4.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

3. The UE Rx beam peak direction for Cell 2 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

7.6.2.4.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.2.4.4.1-2. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.4.4.1-2.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 10082 ms for UE supporting power class 1, or 6242 ms for UE supporting other power class for Test 1 and 107522 ms for UE supporting power class 1, or 66562 ms for UE supporting other power class for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 7.6.2.4.4.1-2 as appropriate.

7.6.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.2.4.4.3-1: Common Exception messages SA inter frequency event triggered reporting with SSB time index detection in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4 with Condition SSB Index and A3-offset = -12dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE and Pattern #13 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 for Test 1 and DRX.2 for Test 2

7.6.2.4.5 Test requirement

Table 7.6.2.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.2.4.5-1: Cell specific test parameters for CA inter-frequency event triggered reporting with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.9			
Beam Assumption Note 7			Config 1	Rough			
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2		dBm/SCS Note4	Config 1	-95.7		-95.7	
SSB_RP Note 3		dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$		dB	Config 1	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$		dB	Config 1	6	6	-Infinity	9
Io Note3		dBm/95.04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition			Config 1	AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in TS 38.133 Annex B.2.1.3, and does not limit UE implementation or test system implementation

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 , the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 10082 ms for power class 1 UE and 6242 ms for other power classes in test 1 and 107522 for power class 1 UE and 66562 ms for other power classes in test 2.

7.6.2.5 NR SA FR1-FR2 event-triggered reporting in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- NR FR1 - FR2 OTA testability is still FFS.

7.6.2.5.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

7.6.2.5.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards. Test 2 is applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306), otherwise Test 1 is applicable.

7.6.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.5.

7.6.2.5.4 Test description

7.6.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.5.4.1-1.

Table 7.6.2.5.4.1-1: SA FR1-FR2 event triggered reporting tests in non-DRX supported test configurations

Test Case ID	Description of serving cell	Description of target cell
7.6.2.5-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.6.2.5-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
7.6.2.5-3	NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell		

Table 7.6.2.5.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1 in FR1
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2 in FR2.
Gap Pattern Id		Config 1,2,3	0	Gap not configured	As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	N/A	
SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1		As specified in clause A.3.1
		Config 2	SSB.1 FR1		As specified in clause A.3.1
		Config 3	SSB.2 FR1		As specified in clause A.3.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2		As specified in clause A.3.2
offsetMO	dB	Config 1,2,3	6		
Hysteresis	dB	Config 1,2,3	0		
a4-Threshold	dBm	Config 1,2,3	-105		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	5.2 for PC1; 3.5 for other PC	3 for PC1; 2 for other PC	PC1 - power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 7.6.2.5.4-3: Test Environment parameters for SA inter-frequency event triggered reporting with SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.2.5.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

3. The UE Rx beam peak direction for Cell 2 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

7.6.2.5.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2.

In test 1 measurement gap pattern configuration # 0 as defined in Table 7.6.2.5.4.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table 7.6.2.5.4.1-2 is provided for UE that support per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.2.5.4.1-2. The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.5.4.1-2.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 5122 ms for UE supporting power class 1, or 3202 ms for UE supporting other power class for Test 1 and 2562 ms for UE supporting power class 1, or 1602 ms for UE supporting other power class for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. After the RRC connection release, the SS:

- transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
or:
- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 7.6.2.5.4.1-2 as appropriate.

7.6.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.2.5.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ for Test 1 Table H.3.1-2 with Condition INTER-FREQ for Test 2 Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4AA with A4-threshold= -105dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE and Pattern #0 for Test 1 Table H.3.1-7 with Condition INTER-FREQ

Table 7.6.2.5.4.3-2: MeasObjectNR-DEFAULT: SA FR1-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB6		
}			

7.6.2.5.5 Test requirement

Table 7.6.2.5.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.2.5.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3	N/A		Setup 1 as specified in clause A.9	
Beam Assumption[Note 7]		Config 1,2,3	N/A		Rough	
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1	FDD		TDD	
		Config 2,3	TDD		TDD	
TDD configuration		Config 1	Not Applicable		TDDConf.3.1	
		Config 2	TDDConf.1.1		TDDConf.3.1	
		Config 3	TDDConf.2.1		TDDConf.3.1	

$BW_{channel}$		MHz	Config 1	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106	100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106	100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	N/A	
	Initial UL BWP			ULBWP.0.1	N/A	
	Dedicated DL BWP			DLBWP.1.1	N/A	
	Dedicated UL BWP			ULBWP.1.1	N/A	
OCNG Patterns			Config 1,2,3	OP.1	OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	-	
			Config 2	SR.1.1 TDD		
			Config 3	SR.2.1 TDD		
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD	-	
			Config 2	CR.1.1 TDD		
			Config 3	CR.2.1 TDD		
Dedicated CORESET RMC configuration			Config 1	CCR.1.1 FDD	CCR.3.1 TDD	
			Config 2	CCR.1.1 TDD	CCR.3.1 TDD	
			Config 3	CCR.2.1 TDD	CCR.3.1 TDD	
SMTC configuration			Config 1	SMTC.2	SMTC.2	
			Config 2,3	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15	120	
			Config 3	30	120	
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$		dBm/SCS	Config 1,2,3	NA Link only, see clause A.6A	-Infinity	-87
SSB_RP Note 3		dBm/SCS Note5	Config 1,2		-Infinity	-87
			Config 3		-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8		dB	Config 1,2,3		-Infinity	14.69
		dBm/95.04 MHz Note5	Config 1,2,3		-Infinity	-58.01
Propagation Condition			Config 1,2,3		No external noise (Note 9)	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 9:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

In test 1 with per-UE gap the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 2, without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

2560 for UE supporting power class 1, or

1600 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 5122 ms for power class 1 UE and 3202 ms for other power classes in test 1 and 2562 for power class 1 UE and 1602 ms for other power classes in test 2.

7.6.2.6 NR SA FR1-FR2 event-triggered reporting in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- NR FR1 - FR2 OTA testability is still FFS.

7.6.2.6.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

7.6.2.6.2 Test applicability

This test applies to all types of NR UE Release 15 and forward supporting 5GS NR SA FR2 and long DRX cycle. Tests 3 and 4 are applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306), otherwise Tests 1 and 2 are applicable.

7.6.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.6.

7.6.2.6.4 Test description

7.6.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.6.4.1-1.

Table 7.6.2.6.4.1-1: SA FR1-FR2 event triggered reporting tests in DRX supported test configurations

Test Case ID	Description of serving cell	Description of target cell
7.6.2.6-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.6.2.6-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
7.6.2.6-3	NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell		

Table 7.6.2.6.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection in DRX

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3	1, 2				Two NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0		Gap not configured		As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39		N/A		
SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1				As specified in clause A.3.1
		Config 2	SSB.1 FR1				As specified in clause A.3.1
		Config 3	SSB.2 FR1				As specified in clause A.3.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2				As specified in clause A.3.2
offsetMO	dB	Config 1,2,3	6				
Hysteresis	dB	Config 1,2,3	0				
a4-Threshold	dBm	Config 1,2,3	-105				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX .2	DRX .1	DRX .2	DRX is used
Time offset between serving and neighbour cells		Config 1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3	5				

T2	s	Config 1,2,3	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	PC1 - power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 7.6.2.6.4-3: Test Environment parameters for SA inter-frequency event triggered reporting without SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.2.6.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

3. The UE Rx beam peak direction for Cell 2 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.7.6.2.6.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table 7.6.2.6.4.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table 7.6.2.6.4.1-2 is provided for UE that support per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.2.6.4.1-2. The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.6.4.1-2.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 7682 ms for UE supporting power class 1, or 4802 ms for UE supporting other power class for Test 1 and Test 3 and 81922 ms for UE supporting power class 1, or 51202 ms for UE supporting other power class for Test 2 and Test 4, then the number of successful tests is increased by one. If the

UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 7.6.2.6.4.1-2 as appropriate.

7.6.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.2.6.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ for Test 1 and Test 2 Table H.3.1-2 with Condition INTER-FREQ for Test 3 and Test 4 Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4AA with A4-threshold= -105dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE and Pattern #0 for Test 1 and Test 2 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 for Test 1 and Test 3 and DRX.2 for Test 2 and Test 4

Table 7.6.2.6.4.3-2: MeasObjectNR-DEFAULT: SA FR1-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB6		
}			

7.6.2.6.5 Test requirement

Table 7.6.2.6.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.2.6.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	NA		Setup 1 as specified in clause A.9	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD		TDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.3.1	
			Config 2	TDDConf.1.1		TDDConf.3.1	
			Config 3	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		-	
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET RMC configuration			Config 1	CCR.1.1 FDD		CCR.3.1 TDD	
			Config 2	CCR.1.1 TDD		CCR.3.1 TDD	
			Config 3	CCR.2.1 TDD		CCR.3.1 TDD	
SMTC configuration			Config 1	SMTC.2		SMTC.2	
			Config 2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15		120	
			Config 3	30		120	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							

EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	dBm/15 kHz Note5		NA Link only, see clause A.6A	-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1,2		-95.7	
		Config 3		-95.7	
SSB_RP Note 3	dBm/SCS Note5	Config 1,2		-Infinity	-86.7
		Config 3		-Infinity	-86.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3		-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3		-Infinity	9
Io Note3	dBm/9.36MHz	Config 1,2		-	-
	dBm/38.16MHz	Config 3		-	-
	dBm/95.04 MHz Note5	Config 1,2,3		-66.7	-57.2
Propagation Condition		Config 1,2,3	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 7682 ms for power class 1 UE and 4802 ms for other power classes in test 1 and test 3 and 81922 for power class 1 UE and 51202 ms for other power classes in test 2 and test 4.

7.6.2.7 NR SA FR1-FR2 event-triggered reporting in non-DRX with SSB time index detection

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- NR FR1 - FR2 OTA testability is still FFS.

7.6.2.7.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

7.6.2.7.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards. Test 2 is applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306), otherwise Test 1 is applicable.

7.6.2.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.7.

7.6.2.7.4 Test description

7.6.2.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.7.4.1-1.

Table 7.6.2.7.4.1-1: SA FR1-FR2 event triggered reporting tests in non-DRX with SSB time index detection supported test configurations

Test Case ID	Description of serving cell	Description of target cell
7.6.2.7-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.6.2.7-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
7.6.2.7-3	NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell		

Table 7.6.2.7.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two NR carrier frequencies is used
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.

Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	Gap not configured	As specified in TS 38.133 [6] clause 9.1.2-1
Measurement gap offset		Config 1,2,3	39	N/A	
SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1		As specified in clause A.3.1
		Config 2	SSB.1 FR1		As specified in clause A.3.1
		Config 3	SSB.2 FR1		As specified in clause A.3.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2		As specified in clause A.3.2
offsetMO	dB	Config 1,2,3	6		
Hysteresis	dB	Config 1,2,3	0		
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	7 for PC1; 4.5 for other PC	3.5 for PC1; 2.5 for other PC	PC1 - power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 7.6.2.7.4.1-3: Test Environment parameters for SA inter-frequency event triggered reporting with SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.2.7.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

3. The UE Rx beam peak direction for Cell 2 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

7.6.2.7.4.2 Test procedure

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2.

In test 1 measurement gap pattern configuration # 0 as defined in Table 7.6.2.7.4.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table 7.6.2.7.4.1-2 is provided for UE that support per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.2.7.4.1-2. The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.7.4.1-2.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 6722 ms for UE supporting power class 1, or 4162 ms for UE supporting other power class for Test 1 and 3362 ms for UE supporting power class 1, or 2082 ms for UE supporting other power class for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 7.6.2.7.4.1-2 as appropriate.

7.6.2.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.2.7.4.3-1: Common Exception messages SA inter frequency event triggered reporting with SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ for Test 1 Table H.3.1-2 with Condition INTER-FREQ for Test 2 Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4AA with Condition SSB Index and A4-threshold= -105dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE and Pattern #0 for Test 1 Table H.3.1-7 with Condition INTER-FREQ

Table 7.6.2.7.4.3-2: MeasObjectNR-DEFAULT: SA FR1-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB6		
}			

7.6.2.7.5 Test requirement

Table 7.6.2.7.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.2.7.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter		**Unit**	**Test configuration**	**Cell 1**		**Cell 2**	
				T1	**T2**	**T1**	**T2**
AoA setup			Config 1,2,3	NA		Setup 1 as specified in clause A.9	
Beam Assumption[Note 7]			Config 1,2,3	N/A		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD		TDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.3.1	
			Config 2	TDDConf.1.1		TDDConf.3.1	
			Config 3	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		-	
			Config 2	SR.1.1 TDD			
			Config 3	SR.2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			

		Config 3	CR.2.1 TDD		
Dedicated CORESET RMC configuration		Config 1	CCR.1.1 FDD	CCR.3.1 TDD	
		Config 2	CCR.1.1 TDD	CCR.3.1 TDD	
		Config 3	CCR.2.1 TDD	CCR.3.1 TDD	
SMTC configuration		Config 1	SMTC.2	SMTC.2	
		Config 2,3	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15	120	
		Config 3	30	120	
EPRE ratio of PSS to SSS		Config 1,2,3	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$	dBm/SCS	Config 1,2, 3	NA Link only, see clause A.6A	-Infinity	-87
SSB_RP Note 3	dBm/SCS Note5	Config 1,2		-Infinity	-87
		Config 3		-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1,2,3		-Infinity	14.69
	dBm/95.04 MHz Note5	Config 1,2,3		Infinity	-58.01
Propagation Condition		Config 1,2,3		No external noise (Note 9)	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

In test 1 with per-UE gap , the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 2 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

3360 for UE supporting power class 1, or

2080 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 6722 ms for power class 1 UE and 4162 ms for other power classes in test 1 and 3362 for power class 1 UE and 2082 ms for other power classes in test 2

7.6.2.8 NR SA FR1-FR2 event-triggered reporting in DRX with SSB time index detection

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- NR FR1 - FR2 OTA testability is still FFS.

7.6.2.8.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event within inter-frequency cell search requirements.

7.6.2.8.2 Test applicability

This test applies to all types of NR UE Release 15 and forward supporting 5GS NR SA FR2 and long DRX cycle. Tests 3 and 4 are applicable only to UEs supporting per-FR gap (*IndependentGapConfig*, as defined in TS 38.306), otherwise Tests 1 and 2 are applicable.

7.6.2.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.8.

7.6.2.8.4 Test description

7.6.2.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.8.4.1-1.

Table 7.6.2.8.4.1-1: SA FR1-FR2 event triggered reporting tests in DRX with SSB time index detection supported test configurations

Test Case ID	Description of serving cell	Description of target cell
7.6.2.8-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.6.2.8-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
7.6.2.8-3	NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell		

Table 7.6.2.8.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection in DRX

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3	1, 2				Two NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0		Gap not configured		As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39		N/A		
SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1				As specified in clause A.3.1
		Config 2	SSB.1 FR1				As specified in clause A.3.1
		Config 3	SSB.2 FR1				As specified in clause A.3.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2				As specified in clause A.3.2
offsetMO	dB	Config 1,2,3	6				
Hysteresis	dB	Config 1,2,3	0				
a4-Threshold	dBm	Config 1,2,3	-105				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX .2	DRX .1	DRX .2	DRX is used
Time offset between serving and neighbour cells		Config 1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3	5				
T2	s	Config 1,2,3	11 for PC1; 6.5 for other PCT BD	108 for PC1; 67 for other PCT BD	11 for PC1; 6.5 for other PCT BD	108 for PC1; 67 for other PCT BD	PC1 - power class 1 as specified in TS 38.101-2 [3] Table 6.2.1.0

Table 7.6.2.8.4-3: Test Environment parameters for SA inter-frequency event triggered reporting with SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	

Exceptions to connection diagram		

1. Message contents are defined in clause 7.6.2.8.4.3.
2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.
3. The UE Rx beam peak direction for Cell 2 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

7.6.2.8.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table 7.6.2.8.4.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table 7.6.2.8.4.1-2 is provided for UE that support per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 7.6.2.8.4.1-2. The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction. T1 starts.
3. The SS shall transmit an *RRCReconfiguration* message.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.8.4.1-2.
6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 10082 ms for UE supporting power class 1, or 6242 ms for UE supporting other power class for Test 1 and Test 3 and 107522 ms for UE supporting power class 1, or 66562 ms for UE supporting other power class for Test 2 and Test 4 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
8. Set Cell 2 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]
9. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 7.6.2.8.4.1-2 as appropriate.

7.6.2.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.2.8.4.3-1: Common Exception messages SA inter frequency event triggered reporting with SSB time index detection in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ for Test 1 and Test 2 Table H.3.1-2 with Condition INTER-FREQ for Test 3 and Test 4 Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-4AA with Condition SSB Index and A4-threshold= -105dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE and Pattern #0 for Test 1 and Test 2 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 for Test 1 and Test 3 and DRX.2 for Test 2 and Test 4

Table 7.6.2.8.4.3-2: MeasObjectNR-DEFAULT: SA FR1-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB6		
}			

7.6.2.8.5 Test requirement

Table 7.6.2.8.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.2.8.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection in DRX

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	NA		Setup 1 as specified in clause A.9	
Beam Assumption[Note 7]			Config 1,2,3	N/A		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD		TDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.3.1	
			Config 2	TDDConf.1.1		TDDConf.3.1	
			Config 3	TDDConf.2.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 2	10: $N_{RB,c}$ = 52		100: $N_{RB,c}$ = 66	
			Config 3	40: $N_{RB,c}$ = 106		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	

	Initial UL BWP			ULBWP.0.1	N/A	
	Dedicated DL BWP			DLBWP.1.1	N/A	
	Dedicated UL BWP			ULBWP.1.1	N/A	
OCNG Patterns			Config 1,2,3	OP.1	OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	-	
			Config 2	SR.1.1 TDD		
			Config 3	SR2.1 TDD		
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD	-	
			Config 2	CR.1.1 TDD		
			Config 3	CR2.1 TDD		
Dedicated CORESET RMC configuration			Config 1	CCR.1.1 FDD	CCR.3.1 TDD	
			Config 2	CCR.1.1 TDD	CCR.3.1 TDD	
			Config 3	CCR.2.1 TDD	CCR.3.1 TDD	
SMTC configuration			Config 1	SMTC.2	SMTC.2	
			Config 2,3	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15	120	
			Config 3	30	120	
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15 kHz Note5		NA Link only, see clause A.6A	-104.7	
N_{oc} Note2		dBm/SCS Note4	Config 1,2		-95.7	
			Config 3		-95.7	
SSB_RP Note 3		dBm/SCS Note5	Config 1,2		-Infinity	-86.7
			Config 3		-Infinity	-86.7
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3		-Infinity	9
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3		-Infinity	9
Io Note3		dBm/9.36MHz	Config 1,2		-	-
		dBm/38.16MHz	Config 3		-	-
		dBm/95.04 MHz Note5	Config 1,2,3		-66.7	-57.2

Propagation Condition		Config 1,2,3		AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4:	SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone			
Note 7:	Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation			

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTIDCCH = 1 ms; 2xTTIDCCH = 2 ms

The overall delays measured shall be less than a total of 10082 ms for power class 1 UE and 6240 ms for other power classes in test 1 and test 3 and 107522 for power class 1 UE and 66562 ms for other power classes in test 2 and test 4.

7.6.2.9 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2) (rel16 additional mandatory gap pattern 17)

Editor's Note: This test case is incomplete in following aspects:

- Test procedure is missing
- Message contents are missing
- TT analysis is missing

7.6.2.9.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4 in TS 38.133 [6].

7.6.2.9.2 Test applicability

This test applies to all types of NR SA UE Rel-16 and forward supporting gap pattern17.

7.6.2.9.3 Minimum conformance requirements

The minimum conformance requirements are defined in TS 38.133 [6] clause 9.3.4.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.9.

7.6.2.9.4 Test description

In this test, there are two cells: NR Cell 1 as PCell in FR2 on NR RF channel 1 and NR Cell 2 as neighbour cell in FR2 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

7.6.2.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.9.4.1-1.

Table 7.6.2.9.4.1-1: SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Configure the test equipment and the DUT according to the parameters in Table 7.6.2.9.4.1-2.

Table 7.6.2.9.4.1-2: Initial conditions for FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.9.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.6.2.9.4.1-3. Cell-specific parameters of NR PCell are specified in Table 7.6.2.9.5-1.
2. Message contents are defined in clause 7.6.2.9.4.3.
3. There are two NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 7.6.2.9.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection (GP17)

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies are used
Active cell		Config 1	NR Cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1
Neighbour cell		Config 1	NR Cell 2	NR Cell 2 is on NR RF channel number 2

Gap Pattern Id		Config 1	17	As specified in clause 9.1.2-1 in TS 38.133 [6]
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2 in TS 38.133 [6]
A3-Offset	dB	Config 1	-30	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells\
T1	s	Config 1	5	
T2	s	Config 1	6 (PC1) 4 (other PC)	

7.6.2.9.4.2 Test procedure

TBD

7.6.2.9.4.3 Message contents

TBD

7.6.2.9.5 Test requirement

Table 7.6.2.9.5-1 defines the NR cell specific test parameters, not including test tolerances yet [will update after TT analysis].

7.6.2.9.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection (GP17)

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15 in TS 38.133 [6]			
				AoA1		AoA2	
Beam assumption[Note 7]			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	

SMTC configuration defined in A.3.11.1 and A.3.11.2		Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1	120		120	
TRS configuration		Config 1	TRS.2.1 TDD		N/A	
TCI configuration		Config 1	CSI-RS.Config.0		N/A	
EPRE ratio of PSS to SSS		Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		N/A		N/A	
N_{oc} Note2	dBm/SCS Note4	Config 1	N/A		N/A	
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-87 + TT	-87 + TT	-Infinity	-87 + TT
$\hat{E}_s / I_{ot}$	dB	Config 1	N/A	N/A	-Infinity	N/A
$\hat{E}_s / N_{oc}$	dB	Config 1	N/A	N/A	-Infinity	N/A
Io Note3	dBm/95.04 MHz Note5	Config 1	-58.01 + TT	-58.01 + TT	-Infinity	-58.01 + TT
Propagation Condition		Config 1	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone.

Note 7: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6], and does not limit UE implementation or test system implementation

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 5120 ms (PC1) or 3200 ms (other than PC1) from the beginning of time period T2.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.2.10 SA event triggered reporting test without gap under non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

7.6.2.10.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event without gap. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.9 in TS 38.133 [6].

7.6.2.10.2 Test applicability

This test applies to all types of NR UE release 16 which supports interFrequencyMeas-Nogap-r16.

7.6.2.10.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.6.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.10.

7.6.2.10.4 Test description

In this test, there are two cells: NR Cell 1 as PCell in FR2 on NR RF channel 1 and NR Cell 2 as neighbour cell in FR2 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

7.6.2.10.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.10.4.1-1.

Table 7.6.2.10.4.1-1: SA FR2-FR2 event triggered reporting tests without gap under non-DRX

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.6.2.10.4.1-2.

Table 7.6.2.10.4.1-2: Initial conditions

Parameter	Unit	Config	Value	Comment
Active cell		1	PCell (Cell 1)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		1	Cell 2	NR cell 2 is on NR RF channel number 2.
RF Channel Number		1	1, 2	Two FR2 NR carrier frequencies is used.
SMTC configuration		1	SMTC.1	
A3-Offset	dB	1	-10	Value modified by TT
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	
Time offset between Cell 1 and Cell 2		1	3 µs	Synchronous cells
T1	s	1	5	

T2	s	1	5	

Table 7.6.2.10.4.1-3: Test Environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.2.10.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

3. The UE Rx beam peak direction for Cell 2 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

7.6.2.10.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.2.1.4.10-2. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.1.4.10-2. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 2402 ms for UE supporting power class 1, or 1442 ms for UE supporting power class 2, 3 and 4, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. TE shall change the active probes in such way that relative angular offset between active probes differs in the following iteration.

10. After the RRC connection release, the SS:

- transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
  or:

- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.2.10.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.6.2.10.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -10dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ

7.6.2.10.5 Test requirement

Table 7.6.2.10.5-1 defines the NR cell specific test parameters, not including test tolerances yet [will update after TT analysis].

Table 7.6.2.10.5-1: Cell specific test parameters

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
TRS configuration		1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1	TCI.State.2		N/A	
OCNG Patterns		1	OP.1		OP.1	
SSB		1	SSB.3 FR2		SSB.3 FR2	
Propagation Condition		1	AWGN			

7.6.2.10.5-2: NR OTA Cell specific test parameters

Parameter	Unit	Config	Cell 1	Cell 2

			T1	T2	T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1			
Beam assumption Note 4		1	Rough		Rough	
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1	3.36	3.36	-Infinity	7.36
N_{oc} Note 2	dBm/15 KHz	1	-102.7			
N_{oc} Note 2	dBm/SCS	1	-93.7			
SSB-RP	dBm/SCS	1	-89.7	-89.7	-Infinity	-85.7
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	8
Io	dBm/95.04MHz	1	-58.23	-58.23	-64.68	-56.04

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB-RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1,
- 1.44s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%,

NOTE: The actual overall delays measured in the test may be up to 2xTTI$_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.2.11 SA event triggered reporting test without gap under DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

7.6.2.11.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event without gap. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.9 in TS 38.133 [6].

7.6.2.11.2 Test applicability

This test applies to all types of NR UE release 16 which supports interFrequencyMeas-Nogap-r16.

7.6.2.11.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.6.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.11.

7.6.2.11.4 Test description

In this test, there are two cells: NR Cell 1 as PCell in FR2 on NR RF channel 1 and NR Cell 2 as neighbour cell in FR2 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

7.6.2.11.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.11.4.1-1.

Table 7.6.2.11.4.1-1: SA FR2-FR2 event triggered reporting tests without gap under DRX

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 7.6.2.11.4.1-2.

Table 7.6.2.11.4.1-2: Initial conditions

Parameter	Unit	Config	Value	Comment
NR RF Channel Number		1, 2	1, 2	2 TDD carrier frequency are used for the NR cells.
Active cell		1, 2	PCell (Cell 1)	Cell 1 is on NR RF channel number 1.
Neighbour cell		1, 2	Cell 2	Cell to be identified. Cell 2 is on NR RF channel number 2.
SMTC configuration		1, 2	SMTC.1	
A3-Offset	dB	1, 2	-14	Value modified by TT
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	DRX.7	
Time offset between Cell 1 and Cell 2		1, 2	3 µs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	52	

Table 7.6.2.11.4.1-3: Test Environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.2.11.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

3. The UE Rx beam peak direction for Cell 2 has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

7.6.2.11.4.2 Test procedure

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.2.1.4.11-2. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.1.4.11-2. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 51202 ms for UE supporting power class 1, or 30722 ms for UE supporting power class 2, 3 and 4, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = [(current cell 2 physical cell identity + 1) mod 1008] for next iteration of the test procedure loop.]

9. TE shall change the active probes in such way that relative angular offset between active probes differs in the following iteration.

10. After the RRC connection release, the SS:

- transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.),
  or:

- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.2.11.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.6.2.11.4.3-1: Common Exception messages SA inter frequency event triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -14dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.7

7.6.2.11.5 Test requirement

Table 7.6.2.11.5-1 defines the NR cell specific test parameters, not including test tolerances yet [will update after TT analysis].

Table 7.6.2.11.5-1: Cell specific test parameters

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		1, 2	1		2	
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2	ULBWP.1.1		N/A	
RLM-RS		1, 2	SSB		N/A	
PDSCH RMC configuration		1, 2	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.3.1 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
SSB		1	SSB.3 FR2		SSB.3 FR2	
		2	SSB.4 FR2		SSB.4 FR2	
Propagation Condition		1, 2	AWGN			

7.6.2.11.5-2: NR OTA Cell specific test parameters

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 1 defined in A.3.15.1			
Beam assumption[Note 4]		1,2	Rough		Rough	
$\hat{E}_s/I_{ot}$ [BB Note 5]	dB	1, 2	3.70	3.70	-Infinity	3.70
N_{oc} [Note 2]	dBm/15 KHz	1, 2	-99.2			
N_{oc} [Note 2]	dBm/SCS	1	-90.2			
		2	-87.2			
SSB-RP	dBm/SCS	1	-86.2	-86.2	-Infinity	-86.2
		2	-83.2	-83.2	-Infinity	-83.2

$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
Io	dBm/95.04MHz	1	-55.73	-55.73	-61.18	-55.73
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB-RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.						
Note 5: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.						

In test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%,

NOTE: The actual overall delays measured in the test may be up to 2xTTI$_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.2.12 to 7.6.2.19

7.6.2.20 NR SA FR2-FR2 event triggered reporting using MUSIM gap with higher priority

Editor's Note: This test case is incomplete in following aspects:

TT analysis is still missing.

7.6.2.20.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event on an inter-frequency layer based on measurement performed within a measurement gap when the UE is configured with two periodic MUSIM gaps. This test will partly verify the SA inter-frequency NR cell search requirements in clause TS 38.133 [6] 9.3.4.

7.6.2.20.2 Test applicability

This test applies to all types of NR UE release 18 and forward, supporting providing MUSIM assistance information with MUSIM gap preference and related MUSIM gap configuration.

7.6.2.20.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.6.2.0.1 and 7.6.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.20.

7.6.2.20.4 Test description

7.6.2.20.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.20.4.1-1.

Table7.6.2.20.4.1-1: Supported test configurations for NR SA FR2-FR2 event-triggered reporting using MUSIM gap with higher priority

Configuration	Description
7.6.2.20-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.6.2.20.4.1-2.

Table 7.6.2.20.4.1-2: Initial conditions for NR SA FR2-FR2 event-triggered reporting using MUSIM gap with higher prority

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.20.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.2.20.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

3. The AoA setup for this test is Setup 3 as defined in clause A.9 The UE RX spherical coverage direction has been obtained previously using one of the search procedures as described in Annex I.

Table 7.6.2.20.4.1-3: General test parameters for NR SA FR2-FR2 event-triggered reporting using MUSIM gap with higher priority

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset	ms	Config 1	17	
Measurement gap priority		Config 1	3	Lowest priority level
1st MUSIM gap Pattern Id		Config 1	0	As specified in Table 9.1.10-1
1st MUSIM gap offset	ms	Config 1	10	
1st MUSIM gap priority		Config 1	2	Second priority level
2nd MUSIM gap Pattern Id		Config 1	1	As specified in Table 9.1.10-1
2nd MUSIM gap offset	ms	Config 1	3	
2nd MUSIM gap priority		Config 1	1	Highest priority level
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells
T1	s	Config 1	5	

T2	s	Config 1	10.4 for PC1; 6.5 for other PC	

7.6.2.20.4.2 Test procedure

Two cells are deployed in the test, which are FR2 PCell (NR Cell 1) in channel 1 and a FR2 neighbour cell (NR Cell 2) in channel 2. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

The three gaps, including a measurement gap and two periodic MUSIM gaps, are configured with different priority levels. In this test, the measurement gap has the lowest priority level, and the 2nd MUSIM gap has the highest priority level (i.e., priority of 2nd MUSIM gap > 1st MUSIM gap > measurement gap) as defined in Table 7.6.2.20.4.1-3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.2.20.5-1. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message with *measConfig* and *musim-GapConfig-r17*.

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.20.5-1. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 10242 ms for UE supporting power class 1, or 6402 ms for UE supporting other power class, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. TE shall change the active probes in such way that relative angular offset between active probes differs in the following iteration.

10. After the RRC connection release, the SS:
    - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5).

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.2.20.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.6.2.20.4.3-1: Common Exception messages SA inter frequency event triggered reporting using MUSIM gap with higher priority

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-4 with Condition A3-offset = -11dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ

Table 7.6.2.20.4.3-2: RRCReconfiguration: NR measurement Configuration (Step 3, test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig-DEFAULT specified in Table H. 3.1-2 with Condition INTER-FREQ and GAP NEEDED	Measurement configuration	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
musim-GapConfig-r17			
setup	MUSIM-GapConfig	MUSIM gap configuration Table 7.6.2.20.4.3-5	
}			
}			
}			
}			
}			
}			
}			
}			

Table 7.6.2.20.4.3-3: MeasObjectNR-DEFAULT (Table 7.6.2.20.4.3-2)

Derivation Path: Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR :: = SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB16		
}			

Table 7.6.2.20.4.3-4: MeasGapConfig (Table 7.6.2.20.4.3-2)

Derivation Path: Table H.3.1-6 with Condition MGe and Pattern #13			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig :: = SEQUENCE {			
gapFR2	not present		
gapFR1	not present		
gapUE	not present		
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	1 entry		
GapConfig-r17[1] SEQUENCE {		Entry 1	
gapOffset-r17	17		
gapPriority-r17	3		
}			
}			
}			

Table 7.6.2.20.4.3-5: MUSIM-GapConfig (Table 7.6.2.20.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-82BA			
Information Element	**Value/remark**	**Comment**	**Condition**
MUSIM-GapConfig-r17 ::= SEQUENCE {			
musim-GapToReleaseList-r17	not present		
musim-GapToAddModList-r17 SEQUENCE (SIZE (1..3)) OF MUSIM-Gap-r17 {	2 entries		
MUSIM-Gap-r17[1] SEQUENCE {		Entry 1	
musim-GapId-r17	0		
musim-GapInfo-r17 SEQUENCE {			
musim-Starting-SFN-AndSubframe-r17	not present		
musim-GapLength-r17	ms6	Pattern #0	
musim-GapRepetitionAndOffset-r17 CHOICE {			
ms40	10	Pattern #0	
}			
}			
}			
MUSIM-Gap-r17[2] SEQUENCE {		Entry 2	
musim-GapId-r17	1		
musim-GapInfo-r17 SEQUENCE {			
musim-Starting-SFN-AndSubframe-r17	not present		
musim-GapLength-r17	ms6	Pattern #1	
musim-GapRepetitionAndOffset-r17 CHOICE {			
ms80	3	Pattern #1	
}			
}			
}			
}			
musim-AperiodicGap-r17	not present		
musim-GapToAddModListExt-v1820 SEQUENCE (SIZE (1..3)) OF MUSIM-GapExt-v1820 {	2 entries		
MUSIM-GapExt-v1820[1] SEQUENCE {		Entry 1	
gapPriority-r18	2	Priority for 1st MUSIM gap	
}			
MUSIM-GapExt-v1820[2] SEQUENCE {		Entry 2	
gapPriority-r18	1	Priority for 2nd MUSIM gap	
}			
}			
musim-GapKeep-r18	not present		
}			

7.6.2.20.5 Test requirement

Table 7.6.2.20.4.1-3 and Table 7.6.2.20.5-1 define the primary level settings including test tolerances for NR SA FR2-FR2 event-triggered reporting using MUSIM gap with higher priority.

Table 7.6.2.20.5-1: NR Cell specific test parameters for NR SA FR2-FR2 event-triggered reporting using MUSIM gap with higher priority

Parameter	**Unit**	**Test configuration**	**Cell 1**		**Cell 2**	
			T1	**T2**	**T1**	**T2**
AoA setup		Config 1	Setup 3 as specified in clause A.9			
			AoA1		AoA2	
Beam AssumptionNote 7		1,2	Rough		Rough	
NR RF Channel Number		Config 1	1		2	
Duplex mode		Config 1	TDD		TDD	
TDD configuration		Config 1	TDDConf.3.1		TDDConf.3.1	
BWchannel	MHz	Config 1	100: NRB,c = 66		100: NRB,c = 66	

Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: NRB,c = 66		100: NRB,c = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Ês		dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSBRP Note 3		dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s/I_{ot}$ BB Note 8		dB	Config 1	1.89	1.89	-Infinity	1.89
IoNote3		dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	No external noise (Note 9)		No external noise (Note 9)	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in TS 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.
Note 9:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1, or

6400 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTI_{DCCH} = 1 ms; $2xTTI_{DCCH}$ = 2 ms

The overall delays measured shall be less than a total of 10242 ms in this test for power class UE and 6402 ms for other power classes.

7.6.2.21 NR SA FR2-FR2 event triggered reporting using MUSIM gap with shorter MGRP

Editor's Note: This test case is incomplete in following aspects:

TT analysis is still missing.

7.6.2.21.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event on an inter-frequency layer based on measurement performed within measurement gaps, when UE is also configured with MUSIM gaps. This test will partly verify the SA inter-frequency NR cell search requirements in clause TS 38.133 [6] 9.3.4.

7.6.2.21.2 Test applicability

This test applies to all types of NR UE release 18 and forward, supporting providing MUSIM assistance information with MUSIM gap preference and related MUSIM gap configuration.

7.6.2.21.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.6.2.0.1 and 7.6.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.2.21.

7.6.2.21.4 Test description

7.6.2.21.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.2.21.4.1-1.

Table7.6.2.21.4.1-1: Supported test configurations for NR SA FR2-FR2 event-triggered reporting using MUSIM gap with shorter MGRP

Configuration	Description
7.6.2.21-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.6.2.21.4.1-2.

Table 7.6.2.21.4.1-2: Initial conditions for NR SA FR2-FR2 event-triggered reporting using MUSIM gap with shorter MGRP

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.2.21.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.2.21.4.3.

2. There are two NR cells on two carriers specified in the test. Cell 1 is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings for Cell 2 are set according to Annex C.1.2.

3. The AoA setup for this test is Setup 3 as defined in clause A.9 The UE RX spherical coverage direction has been obtained previously using one of the search procedures as described in Annex I.

Table 7.6.2.21.4.1-3: General test parameters for NR SA FR2-FR2 event-triggered reporting using MUSIM gap with shorter MGRP

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	1 for per-UE gap, 14 for per-FR gap	As specified TS 38.133 [6] in table 9.1.2-1.
Measurement gap offset		Config 1	39	
MUSIM gap Pattern Id		Config 1	0	As specified in TS 38.133 [6] table 9.1.10-1.
MUSIM gap offset	ms	Config 1	2	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in TS 38.133 [6] clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	

T2	s	Config 1	10.4 for PC1; 6.5 for other PC	

7.6.2.21.4.2 Test procedure

Two cells are deployed in the test, which are FR2 PCell (NR Cell 1) in channel 1 and a FR2 neighbour cell (NR Cell 2) in channel 2. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

Measurement gap and MUSIM gap pattern configurations defined in Table 7.6.2.21.4.1-3 are provided to the UE. When UE does not support per-FR gap, measurement gap pattern configuration is provided for a per-UE gap. When UE supports per-FR gap, measurement gap pattern configuration is provided for a per-FR2 gap. MUSIM gap is configured with shorter MGRP than the configured measurement gap. In test 1 measurement gap pattern configuration # 1 as defined in Table 7.6.2.21.4.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #14 as defined in Table 7.6.2.21.4.1-2 is provided for UE that support per-FR gap.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.2.21.5-1.

3. SS shall transmit an RRCReconfiguration message with measConfig and musim-GapConfig-r17.

4. The UE shall transmit an RRCReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.2.21.5-1. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 10242 ms for UE supporting power class 1, or 6402 ms for UE supporting power class 2 ,3 and 4, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6) or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. TE shall change the active probes in such way that relative angular offset between active probes differs in the following iteration.

10. After the RRC connection release, the SS:
    - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5).

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.2.21.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.6.2.21.4.3-1: Common Exception messages SA inter frequency event triggered reporting using MUSIM gap with shorter MGRP

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-4 with Condition SSB Index and A3-offset = -11dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ

Table 7.6.2.21.4.3-2: RRCReconfiguration: NR measurement Configuration (Step 3, test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig-DEFAULT specified in Table H. 3.1-2 with Condition INTER-FREQ and GAP NEEDED	Measurement configuration	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
musim-GapConfig-r17 CHOICE {			
	MUSIM-GapConfig	MUSIM gap configuration Table 7.6.2.21.4.3-5	
}			
}			
}			
}			
}			
}			
}			
}			

Table 7.6.2.21.4.3-3: MeasObjectNR-DEFAULT (Table 7.6.2.21.4.3-2)

Derivation Path: Table H.3.1-3 with condition INTER-FREQ MO and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB16		
}			

Table 7.6.2.21.4.3-4: MeasGapConfig: measurement gap configuration (Table 7.6.2.21.4.3-2)

Derivation Path: Table H.3.1-6 with MGe			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapFR2	not present		
gapFR2 CHOICE {			pc_independentGapConfig
setup SEQUENCE {			
gapOffset	39	Pattern #14	
mgl	ms5dot5	Pattern #14	
mgrp	ms80	Pattern #14	

}			
}			
gapFR1	not present		
gapUE	not present		pc_independentGapConfig
gapUE CHOICE {	1 entry		
setup SEQUENCE {		Entry 1	
gapOffset-r17	39	Pattern #1	
gapPriority-r17	not present		
}			
}			
}			

Table 7.6.2.21.4.3-5: MUSIM-GapConfig (Table 7.6.2.21.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-82BA			
Information Element	**Value/remark**	**Comment**	**Condition**
MUSIM-GapConfig-r17 ::= SEQUENCE {			
musim-GapToReleaseList-r17	not present		
musim-GapToAddModList-r17 SEQUENCE (SIZE (1..3)) OF MUSIM-Gap-r17 {	1 entry		
MUSIM-Gap-r17[1] SEQUENCE {		Entry 1	
musim-GapId-r17	0		
musim-GapInfo-r17 SEQUENCE {			
musim-Starting-SFN-AndSubframe-r17	not present		
musim-GapLength-r17	ms6	Pattern #0	
musim-GapRepetitionAndOffset-r17 CHOICE {			
ms40	2	Pattern #0	
}			
}			
}			
}			
musim-AperiodicGap-r17	not present		
}			

7.6.2.21.5 Test requirement

Table 7.6.2.21.4.1-3 and Table 7.6.2.21.5-1 define the primary level settings including test tolerances for NR SA FR2-FR2 event-triggered reporting using MUSIM gap with shorter MGRP.

Table 7.6.2.21.5-1: NR Cell specific test parameters for NR SA FR2-FR2 event-triggered reporting using MUSIM gap with shorter MGRP

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.9			
				AoA1		AoA2	
Beam AssumptionNote 7			1,2	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
BWchannel		MHz	Config 1	100: NRB,c = 66		100: NRB,c = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: NRB,c = 66		100: NRB,c = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	

	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
$\hat{E}s$		dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSBRP Note 3		dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s/I_{ot}$ BB Note 8		dB	Config 1	1.89	1.89	-Infinity	1.89
IoNote3		dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: VoidNote 3: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in TS 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1, or

6400 for UE supporting power class 2, 3, 4.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

TTI insertion uncertainty = TTI_{DCCH} = 1 ms; $2xTTI_{DCCH}$ = 2 ms

The overall delays measured shall be less than a total of 10242 ms in this test for power class UE and 6402 ms for other power classes.

7.6.3 L1-RSRP measurement for beam reporting

7.6.3.0 Minimum conformance requirements for L1-RSRP measurement for beam reporting

7.6.3.0.1 Minimum conformance requirements for SSB-based L1-RSRP measurement for beam reporting

Same as clause 5.6.3.0.1

The normative reference for this requirement is TS 38.133 [6] clause 9.5.3.1, 9.5.4.1 and 9.5.5.1.

7.6.3.0.2 Minimum conformance requirements for CSI-RS-based L1-RSRP measurement for beam reporting

Same as clause 5.6.3.0.2

The normative reference for this requirement is TS 38.133 [6] clauses 9.5.3.1, 9.5.4.2 and 9.5.5.2.

7.6.3.0.3 Minimum conformance requirements for Inter-cell SSB based L1-RSRP Reporting

If a cell with PCI different from serving cell is known according to TS 38.133 [6] clause 9.13.2, the UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$. The requirements specified in this clause are only applicable when

- *highSpeedMeasFlag-r16* is not configured, and
- *highSpeedMeasFlagFR2-r17* is not configured, and
- highSpeedMeasCA-Scell-r17 is not configured, and
- SSBs of CDP outside SMTCs for L1-RSRP measurement are not overlapped with concurrent gaps.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ is defined in Table 7.6.3.6.3-1 for FR2 when *highSpeedMeasFlagFR2-r17* is not configured, where

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- N= 8.

For FR2,

- P is $P_{L1_sharing}$*$P_{sharing\ factor,\ CDP}$, when SSB is not overlapped with measurement gap and SSB is fully overlapped with SMTC period ($T_{SSB_CDP} = T_{SMTCperiod}$), and $T_{SSB_SC} = T_{SMTCperiod}$.
- P is $P_{L1_sharing} * \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{xRP}}$, when SSB is partially overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod}$ < xRP), and $T_{SSB_SC} = T_{SMTCperiod}$.

- $P_2=\frac{1}{1-\frac{T_{SSB_CDP}}{T_{SMTCperiod}}}$, when SSB is not overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB_CDP} < T_{SMTCperiod}$).

- $P_2=\frac{1}{1-\frac{T_{SSB_CDP}}{MGRP}-\frac{T_{SSB_CDP}}{T_{SMTCperiod}}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB_CDP} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{SSB_CDP} < 0.5*T_{SMTCperiod}$

- $P_2=\frac{1}{1-\frac{T_{SSB_CDP}}{min(T_{SMTCperiod},MGRP)}}$,when SSB is partially overlapped with measurement gap (T_{SSB_CDP} <MGRP) and SSB is partially overlapped with SMTC occasion ($T_{SSB_CDP} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- If SSB resource from serving cell is configured for L1-RSRP measurements, and P_1 is valid according to TS 38.133 [6] clause 9.5.4.1, and any symbol of the SSBs from serving cell and cell with different PCI are overlapping or adjacent (in time domain)

  - $P = \frac{P_2}{1-\frac{P_2*T_{SSB_CDP}}{P_1*T_{SSB_SC}}}$, if $P_2*T_{SSB_CDP} < P_1*T_{SSB_SC}$.

  - $P = P_2$, if $P_2*T_{SSB_CDP} > P_1*T_{SSB_SC}$.

  - $P = 2*P_2$, if $P_1*T_{SSB_SC} = P_2*T_{SSB_CDP}$.

  - Otherwise, $P = P_2$

- T_{SSB_CDP} = SSB periodicity of the cell with PCI different from serving cell

- $T_{SMTCperiod}$ = the configured SMTC period

- T_{SSB_SC} = ssb-periodicityServingCell of the serving cell

- $P_{sharing\ factor}$ = 1, if the SSB configured for L1-RSRP measurement outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

  - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,

- $P_{sharing\ factor}$ = 3, otherwise.

- $P_{L1_sharing}$ = 2, if SSB resource from serving cell is configured for L1-RSRP measurements, and $P_{sharing_factor}$ is used in 9.5.4.1, and any symbol of the SSBs from serving cell and cell with different PCI are overlapping or adjacent (in time domain). $P_{L1_sharing}$ = 1, otherwise.

If the high layer in TS 38.331 [6] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For FR2 cell with PCI different from serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For FR2 cell with PCI different from serving cell, longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 7.6.3.6.3-1: Inter-cell L1-RSRP measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ for known cells with different PCIs in FR2

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_CDP}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P*N)*T_{SSB_CDP})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},T_{SSB_CDP}))
DRX cycle > 320ms	ceil(1.5*M*P*N)*T_{DRX}
Note: T_{SSB_CDP} is the periodicity of the SSB-Index configured for inter-cell L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

The normative reference for this requirement is TS 38.133 [6] clause 9.13.4.1

7.6.3.1 NR SA FR2 SSB-based L1-RSRP measurement in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test case is incomplete for extreme conditions

7.6.3.1.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.1.

7.6.3.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.6.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.3.1.

7.6.3.1.4 Test description

7.6.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.3.1.4.1-1.

Table 7.6.3.1.4.1-1: NR SA FR2 SSB-based L1-RSRP measurement in non-DRX supported test configurations

Test Case ID	Description
7.6.3.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.6.3.1-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 7.6.3.1.4.1-2: General test parameters for NR SA FR2 SSB-based L1-RSRP measurement in non-DRX

Parameter	Config	Unit	Value

SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1		SR.3.1 TDD
			SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		Off
reportConfigType	1~2		periodic
reportQuantity	1~2		ssb-Index-RSRP
Number of reported RS	1~2		2
L1-RSRP reporting period	1~2	slot	320
T1	1~2	s	5
T2	1~2	s	2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 7.6.3.1.4-3: Test Environment parameters for NR SA FR2 SSB-based L1-RSRP measurement in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.

Connection Diagram	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.3.1.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

7.6.3.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.6.3.1.4.1-2. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.6.4.1.4.1-2.

2. Set the parameters according to T1 in Table 7.6.3.1.5-1. T1 starts.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 320 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 7.6.3.1.5-1. T2 starts.

5. The UE shall start sending valid L1-RSRP reports. The SS shall check the following requirements:

   - R1: the UE shall start to transmit valid L1-RSRP reports no later than 1760ms for UE supporting power class 1 in configuration 1, no later than 1720 ms for UE supporting power class 1 in configuration 2, no later than 1280 ms for UE supporting power class other than 1 in configuration 1 and no later than 1240 ms for UE supporting power class other than 1 in configuration 2 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 Table 7.6.3.1.5-2 for test configuration 1 and the corresponding absolute accuracy requirements in Table 7.6.3.1.5-3 for test configuration 2. If the first valid report is received before the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the UE shall transmit L1-RSRP reports every 320 slots. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   -R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding absolute accuracy requirements in Table 7.6.3.1.5-2 for test configuration 1 and the corresponding absolute accuracy requirements in Table 7.6.3.1.5-3 for test configuration 2 the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   -R4: The DIFF-RSRP value of SSB#0 reported by the UE is compared to the expected DIFF-RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding relative accuracy requirements in Table 7.6.3.1.5-4 for all test configurations, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR

SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
or:
- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.3.1.4.3-1: Common Exception messages NR SA FR2 SSB-based L1-RSRP measurement in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB

Table 7.6.3.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

7.6.3.1.5 Test requirement

Table 7.6.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.3.1.5-1: Cell specific test parameters for NR SA FR2 SSB-based L1-RSRP measurement in non-DRX

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.9			
Assumption for UE beamsNote 4	1~2		Rough			
N_{oc} Note2	1~2	dBm/15kHz	-105			
N_{oc} Note2	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s/I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87

	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in TS 38.133 Annex B.2.1.3, and does not limit UE implementation or test system implementation						

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 1680 for UE supporting power class 1
- 1200 for UE supporting power class 2,3 or 4.

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 7.6.3.1.5-2 for test configuration 1 and the corresponding absolute accuracy requirements in Table 7.6.3.1.5-3 for test configuration 2 and the corresponding relative accuracy requirements in Table 7.6.3.1.5-4 for all test configurations.

Table 7.6.3.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configuration 1 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	40
Highest reported value (SSB#1)	-	99

Table 7.6.3.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 2 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	43
Highest reported value (SSB#1)	-	102

Table 7.6.3.1.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations (R4)

	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	1
Highest DIFF RSRP reported (SSB#0)	-	7

For the test to pass, the ratio of successful reported valued for each requirement (R1 to R4) shall be at least 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.6.3.2 NR SA FR2 SSB-based L1-RSRP measurement in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- Normal conditions

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test case is incomplete for extreme conditions

7.6.3.2.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.1.

7.6.3.2.2 Test applicability

This test applies to all types of NR UE Release 15 and forward supporting 5GS NR SA FR2 and long DRX cycle.

7.6.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.3.2.

7.6.3.2.4 Test description

7.6.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.3.2.4.1-1.

Table 7.6.3.2.4.1-1: NR SA FR2 SSB-based L1-RSRP measurement in DRX supported test configurations

Test Case ID	Description
7.6.3.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.6.3.2-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 7.6.3.2.4.1-2: General test parameters for NR SA FR2 SSB-based L1-RSRP measurement in DRX

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1		SR.3.1 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2

DRX configuration	1~2		DRX.3
reportConfigType	1~2		periodic
reportQuantity	1~2		ssb-Index-RSRP
Number of reported RS	1~2		2
L1-RSRP reporting period	1~2	slot	320
T1	1~2	s	5
T2	1~2	s	3
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 7.6.3.2.4-3: Test Environment parameters for NR SA FR2 SSB-based L1-RSRP measurement in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.3.2.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

7.6.3.2.4.2 Test procedure

Same as in 7.6.3.1.4.2 with the following exception:

5. The UE shall start sending valid L1-RSRP reports. The SS shall check the following requirements:

- R1: the UE shall start to transmit valid L1-RSRP reports no later than 2960ms for UE supporting power class 1 in configuration 1, no later than 2920ms for UE supporting power class 1 in configuration 2, no later than 2000ms for UE supporting power class other than 1 in configuration 1 and no later than 1960 ms for UE

supporting power class other than 1 in configuration 2 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 Table 7.6.3.2.5-2 for test configuration 1 and the corresponding absolute accuracy requirements in Table 7.6.3.2.5-3 for test configuration 2. If the first valid report is received before the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

- R2: the UE shall transmit L1-RSRP reports every 320 slots. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

-R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding absolute accuracy requirements in Table 7.6.3.2.5-2 for test configurations 1 and 2 and the corresponding absolute accuracy requirements in Table 7.6.3.2.5-3 for test configurations 3 and 4 the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

-R4: The DIFF-RSRP value of SSB#0 reported by the UE is compared to the expected DIFF-RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding relative accuracy requirements in Table 7.6.3.2.5-4 for all test configurations, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

7.6.3.2.4.3 Message contents

Same message content as in subclause 7.6.3.1.4.3 with the following exception:

Table 7.6.3.2.4.3-1: Common Exception messages NR SA FR2 SSB-based L1-RSRP measurement in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.7-1 with condition DRX.3

7.6.3.2.5 Test requirement

Table 7.6.3.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.3.2.5-1: Cell specific test parameters for NR SA FR2 SSB-based L1-RSRP measurement in DRX

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.9			
Assumption for UE beamsNote 4	1~2		Rough			
N_{oc} Note2	1~2	dBm/15kHz	-105			
N_{oc} Note2	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s/I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47

$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in TS 38.133 Annex B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 7.6.3.2.5-2 for test configuration 1 and the corresponding absolute accuracy requirements in Table 7.6.3.2.5-3 for test configuration 2 and the corresponding relative accuracy requirements in Table 7.6.3.2.5-4 for all test configurations.

Table 7.6.3.2.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configuration 1 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	40
Highest reported value (SSB#1)	-	99

Table 7.6.3.2.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 2 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	43
Highest reported value (SSB#1)	-	102

Table 7.6.3.2.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations (R4)

	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	1
Highest DIFF RSRP reported (SSB#0)	-	7

For the test to pass, the ratio of successful reported valued for each requirement (R1 to R4) shall be at least 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.6.3.3 NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test case is incomplete for extreme conditions

7.6.3.3.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.2.

7.6.3.3.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.6.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.3.3.

7.6.3.3.4 Test description

7.6.3.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.3.3.4.1-1.

Table 7.6.3.3.4.1-1: NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX supported test configurations

Test Case ID	Description
7.6.3.4-1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table 7.6.3.3.4.1-2: General test parameters for NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
Data $_{RBs}$ allocated	1		66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		Off
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		8

Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 7.6.3.3.4-3: Test Environment parameters for NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.3.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.3.3.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

7.6.3.3.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. UE is also configured to measure L1-RSRP based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in table 7.6.3.3.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.3.3.5-1. T1 starts.

3. After 480ms from the start of the test the SS transmits the DCI trigger in slot 1.

4. The SS shall check following requirements:

   - R1: the UE shall send L1-RSRP report at slot 8 from the reception of DCI trigger. If the report is received at slot 8 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

- R2: the L1-RSRP value of CSI-RS#1 reported by the UE is compared to the expected L1-RSRP value for CSI-RS #1. If the resulting value is outside the limits in Table 7.6.3.3.5-2 or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

-R3: The DIFF RSRP value of CSI-RS #0 reported by the UE is compared to the expected DIFF RSRP value. If the resulting value is outside the limits in Table 7.6.3.3.5-4 or the UE fails to report the measurement value for CSI-RS #0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

6. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

7. After the RRC connection release, the SS:

- transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
or:
- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.6.3.3.4.3-1: Common Exception messages NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.6-2 with conditions APERIODIC and CSI-RSRP Table H.3.6-3 with conditions CSI-RS and APERIODIC

Table 7.6.3.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

7.6.3.3.5 Test requirement

Table 7.6.3.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.3.3.5-1: Cell specific test parameters for NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.9	
N_{oc} Note1	1	dBm/15kHz	-105	
N_{oc} Note1	1	dBm/SSB SCS	-95.97	
$\hat{E}_s/I_{ot}$	1	dB	0	9
CSI-RS RSRP Note2	1	dBm/SSB SCS	-95.97	-86.97
Io Note2	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s/N_{oc}$	1	dB	0	9
Note 1: Void Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

After 480ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 7.6.3.3.5-2 the corresponding relative accuracy requirements in Table 7.6.3.3.5-3.

Table 7.6.3.3.5-2: L1-RSRP absolute accuracy requirements for the reported values R2

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	40
Highest reported value (CSI-RS#1)	99

Table 7.6.3.3.5-3: L1-RSRP relative accuracy requirements for the reported values R3

	T1
Lowest DIFF RSRP reported (CSI-RS#0)	1
Highest DIFF RSRP reported (CSI-RS#0)	7

The rate of correct events observed during repeated tests (R1 to R3) shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.3.4 NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test case is incomplete for extreme conditions

7.6.3.4.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5.4.2.

7.6.3.4.2 Test applicability

This test applies to all types of NR UE Release 15 and forward supporting 5GS NR SA FR2 and long DRX cycle.

7.6.3.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.3.4.

7.6.3.4.4 Test description

7.6.3.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.3.4.4.1-1.

Table 7.6.3.4.4.1-1: NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX supported test configurations

Test Case ID	Description
7.6.3.4-1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table 7.6.3.4.4.1-2: General test parameters for NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
Data $_{RBs}$ allocated	1		66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		DRX.3
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		8
Propagation condition	1		AWGN
T1	1	s	5

EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 7.6.3.4.4-3: Test Environment parameters for NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.3.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.3.4.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

7.6.3.4.4.2 Test procedure

Same test procedure as in subclause 7.6.3.3.4.2 with tables 7.6.3.3.4.1-2 and 7.6.3.3.5-1 replaced by tables 7.6.3.4.4.1-2 and 7.6.3.4.5-1 and following change in step 3.

3. After 1440ms from the start of the test the SS transmits the DCI trigger in slot 1.

7.6.3.4.4.3 Message contents

Same message content as in subclause 7.6.3.3.4.3 with the following exception:

Table 7.6.3.4.4.3-1: Common Exception messages NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.7-1 with condition DRX.3

7.6.3.4.5 Test requirement

Table 7.6.3.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.3.4.5-1: Cell specific test parameters for NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.9	
Assumption for UE beams Note 3	1~2		Rough	
N_{oc} Note1	1	dBm/15kHz	-105	
N_{oc} Note1	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP Note2	1	dBm/SSB SCS	-95.97	-86.97
Io Note2	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9

Note 1: Void
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in TS 38.133 Annex B.2.1.3, and does not limit UE implementation or test system implementation

After 1440ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 7.6.3.4.5-2 the corresponding relative accuracy requirements in Table 7.6.3.4.5-3.

Table 7.6.3.4.5-2: L1-RSRP absolute accuracy requirements for the reported values

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	40
Highest reported value (CSI-RS#1)	99

Table 7.6.3.4.5-3: L1-RSRP relative accuracy requirements for the reported values

	T1
Lowest DIFF RSRP reported (CSI-RS#0)	1
Highest DIFF RSRP reported (CSI-RS#0)	7

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.3.5 NR SA FR2 SSB based L1-RSRP measurement test when DRX is used for power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

Editor's note: This test case is incomplete. The following aspects are missing:

- Test tolerance and measurement uncertainty analysis are missing

7.6.3.5.1 Test purpose

The purpose of this test is to verify that the power class 6 UE makes correct reporting of L1-RSRP measurement when *highSpeedMeasFlagFR2-r17* is configured within L1-RSRP measurement requirements for power class 6 UE configured with *highSpeedMeasFlagFR2*-r17 in TS 38.133[6] clause 9.5.4.1.

7.6.3.5.2 Test applicability

This test applies to all types of NR UE power class 6 release 17 onwards that support *highSpeedMeasFlagFR2-r17*.

7.6.3.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.3.5.

7.6.3.5.4 Test description

7.6.3.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.3.5.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 7.6.3.5.4.1-2. The test parameters are given in Tables 7.6.3.5.4.1-3. There is one cell (Cell 1), which is the active NR cell, in the test.

Table 7.6.3.5.4.1-1: NR SA FR2 SSB based L1-RSRP for power class 6 UE configured with *highSpeedMeasFlag-r17* test configurations

Configuration	Description
7.6.3.5-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.6.3.5-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 7.6.3.5.4.1-2: Initial conditions for NR SA FR2 cell re-selection for PC6

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.1.1.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 7.6.3.5.4.1-2: General test parameters

Parameter	Config	Unit	Value
highSpeedMeasFlagFR2-r17	1~2		Set 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD

SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		periodic
reportQuantity	1~2		ssb-Index-RSRP
Number of reported RS	1~2		2
L1-RSRP reporting period	1~2	slot	320
T1	1~2	s	5
T2	1~2	s	3
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~2		AWGN 19444Hz
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

1. Message contents are defined in clause 7.6.3.5.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

7.6.3.5.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.6.3.5.4.1-2. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 7.6.3.5.4.1-2.

2. Set the parameters according to T1 in Table 7.6.3.5.5-1. T1 starts.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 320 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 7.6.3.5.5-1. T2 starts.

5. The UE shall start sending valid L1-RSRP reports. The SS shall check the following requirements:

- R1: the UE shall start to transmit valid L1-RSRP reports no later than 720 ms plus 320 slots in configurations 1 and 2 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 Table 7.6.5.3.5-2 for test configuration 1 and the corresponding absolute accuracy requirements in Table

7.6.3.5.5-3 for test configuration 2. If the first valid report is received before the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

- R2: the UE shall transmit L1-RSRP reports every 320 slots. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

- R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding absolute accuracy requirements in Table 7.6.5.3.5-2 for test configuration 1 and the corresponding absolute accuracy requirements in Table 7.6.5.3.5-3 for test configuration 2 the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

- R4: The DIFF-RSRP value of SSB#0 reported by the UE is compared to the expected DIFF-RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding relative accuracy requirements in Table 7.6.3.5.5-4 for all test configurations, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. After the RRC connection release, the SS:

- transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switch off and on the UE and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
  or:
  - switch off and on the UE and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.3.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.3.5.4.3-1: Common Exception messages NR SA FR2 SSB-based L1-RSRP measurement in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.7-1 with condition DRX.3

Table 7.6.3.5.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM	

		and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

Table 7.6.3.5.4.3-3: HighSpeedConfigFR2

Derivation Path: TS 38.508-1[14], Table 4.6.3-62C			
Information Element	**Value/remark**	**Comment**	**Condition**
HighSpeedConfigFR2-r17 ::= SEQUENCE {			
highSpeedMeasFlagFR2-r17	set1		
highSpeedDeploymentTypeFR2-r17	bidirectional		
highSpeedLargeOneStepUL-TimingFR2-r17	true		
}			

7.6.1.1.5 Test requirement

Table 7.6.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.3.5.5-1: SSB specific test parameters for power class 6 UE configured with highSpeedMeasFlag-r17

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam Assumption Note 4	1-2		Rough			
N_{oc} Note2	1~2	dBm/15kHz	-105+TT			
N_{oc} Note2	1	dBm/SSB SCS	-96+TT			
	2		-93+TT			
$\hat{E}_s / I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP Note3	1	dBm/SSB SCS	-96+TT	-96+TT	-Infinity	-87+TT
	2		-93+TT	-93+TT	-Infinity	-84+TT
Io Note3	1	dBm/95.04MHz	-63.97+TT	-63.97+TT	-66.98	-57.47+TT
	2		-63.97+TT	-63.97+TT	-66.98	-57.47+TT
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9+TT

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall send L1-RSRP report every 320 slots. No later than 720 ms plus 320 ms from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1.

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 7.6.3.5.5-2 for test configuration 1 and the corresponding absolute accuracy requirements in Table 7.6.3.5.5-3 for test configuration 2 and the corresponding relative accuracy requirements in Table 7.6.3.5.5-4 for all test configurations.

Table 7.6.3.5.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configuration 1 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	40
Highest reported value (SSB#1)	-	99

Table 7.6.3.5.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 2 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	43
Highest reported value (SSB#1)	-	102

Table 7.6.3.5.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations (R4)

	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	1
Highest DIFF RSRP reported (SSB#0)	-	7

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be at least 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.6.3.6 NR SA FR2 Inter-cell SSB based L1-RSRP measurements on FR2 SCell when DRX is not used

Editor's note: This test case is incomplete. The following aspects are missing:

- NR FR1 - FR2 OTA testability is still FFS.

7.6.3.6.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in TS 38.133 [6] clause 9.13.4.1.

7.6.3.6.2 Test applicability

This test applies to all types of NR UE release 15 onwards supporting inter-band CA between FR1 (PCell) and FR2 (SCell).

7.6.3.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.3.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.3.6.

7.6.3.6.4 Test description

7.6.3.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.3.6.4.1-1.

Table 7.6.3.6.4.1-1: Supported test configurations

Config	Description
1	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

2	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	NR PCell 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR SCell 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR SCell 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
6	NR PCell 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR SCell 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 7.6.3.6.4.1-2: Cell specific test parameters for FR1 PCell

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
CSI-RS for tracking	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		Off
SSB index assigned as RLM RS	1~6		0,1
SSB Index assigned as BFD RS (q_0)	1~6		0
SSB Index assigned as CBD RS (q_1)	1~6		1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			

EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2	1~6	dBm/15 kHz	-104
$\hat{E}_s / I_{ot}$	1~6	dB	17
$\hat{E}_s / N_{oc}$	1~6	dB	17
SS-RSRP Note3	1~6	dBm/15 kHz	-87
Io Note3	1,2,4,5	dBm/ 9.36MHz	-58.96
	3,6	dBm/ 38.16MHz	-52.86
Propagation condition	1~6		AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 7.6.3.6.4.1-3: Cell specific test parameters for FR2 SCell

Parameter	Config	Unit	Value
SSB GSCN	1~6		Freq2
Duplex mode	1~6		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~6	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1~6		66
PDSCH Reference measurement channel	1,2,3		SR.3.2 TDD
	4,5,6		SR.3.3 TDD
RMSI CORESET Reference Channel	1,2,3		CR.3.1 TDD
	4,5,6		CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2,3		CCR.3.1 TDD
	4,5,6		CCR.3.7 TDD
SSB configuration	1,2,3		SSB.1 FR2
	4,5,6		SSB.2 FR2
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~6		SMTC.1
TRS Configuration	1~6		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~6		TCI.State.2
DRX configuration	1~6		Off
reportConfigType	1~6		periodic
reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
SSB index associated to serving PCI	1~6		0
SSB index associated to a PCI different from serving cell	1~6		1
Timing offset between two SSBs associated to different PCI	1~6		<CP
L1-RSRP reporting period	1~6	slot	320
T1	1~6	s	5
T2	1~6	s	2
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			

EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Configure the test equipment and the DUT according to the parameters in Table 7.6.3.6.4.1-4.

Table 7.6.3.6.4.1-4: Initial conditions for NR SA FR2 Inter-cell SSB based L1-RSRP measurements on FR2 SCell when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.3.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Cell specific test parameter settings are set up according to Table 7.6.3.6.4.1-2 and 7.6.3.6.4.1-3

2. Message contents are defined in clause 7.6.3.6.4.3.

7.6.3.6.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2 respectively. Prior to the start of the time duration T1, the UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.6.3.6.4.1-2 and 7.6.3.6.4.1-3. Before the test, UE is configured to perform RLM and BFD on Cell 1 in FR1 and perform L1-RSRP measurements on the SSB#0 in FR2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.3.6.5-1. T1 starts.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 320 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 7.6.3.6.5-1. T2 starts. SSB#1 starts transmission, and the UE is configured for L1-RSRP measurement on SSB#1.

5. The UE shall start sending valid L1-RSRP reports. The SS shall check the following requirements:

   - R1: the UE shall start to transmit valid L1-RSRP reports no later than 2200ms for UE supporting power class 1 in configuration 1,2 and 3, no later than 2180 ms for UE supporting power class 1 in configuration 4, 5 and 6, no later than 1720 ms for UE supporting power class 2, 3 and 4 in configuration 1 and no later than 1700 ms for UE supporting power class 2, 3 and 4 in configuration 2 from the beginning of time period T2. A valid

report shall meet the absolute L1-RSRP requirement for SSB#1 Table 7.6.3.1.5-2 for test configuration 1 and the corresponding absolute accuracy requirements in Table 7.6.3.1.5-3 for test configuration 2. If the first valid report is received before the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

- R2: the UE shall transmit L1-RSRP reports every 320 slots. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

-R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding absolute accuracy requirements in Table 7.6.3.1.5-2 for test configuration 1 and the corresponding absolute accuracy requirements in Table 7.6.3.1.5-3 for test configuration 2 the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

-R4: The DIFF-RSRP value of SSB#0 reported by the UE is compared to the expected DIFF-RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding relative accuracy requirements in Table 7.6.3.1.5-4 for all test configurations, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.3.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.6.3.6.4.3-1: Common Exception messages NR SA SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10

Table 7.6.3.6.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM	

		and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

7.6.3.6.5 Test requirements

Table 7.6.3.6.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.3.6.5-1: SSB specific test parameters for FR2 SCell

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration	1~6		Setup 3 according to A.9.3			
			AoA1		AoA2	
Beam Assumption Note 4	1~6		Rough		Rough	
N_{oc} Note2	1~6	dBm/15kHz	-105		-105	
N_{oc} Note2	1~3	dBm/SSB SCS	-96		-96	
	4~6		-93		-93	
$\hat{E}_s / I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for ☐ to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2160 for UE supporting power class 1
- 1680 for UE supporting power class 2, 3 or 4.

Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 7.6.3.6.5-2 for test configuration 1 and the corresponding absolute accuracy requirements in Table 7.6.3.6.5-3 for test configuration 2 and the corresponding relative accuracy requirements in Table 7.6.3.6.5-4 for all test configurations.

Table 7.6.3.6.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configuration 1 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#0 and SSB#1)	-	40
Highest reported value (SSB#0 and SSB#1)	-	99

Table 7.6.3.6.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 2 (R1 and R3)

Normal Conditions	T1	T2
Lowest reported value (SSB#0 and SSB#1)	-	43
Highest reported value (SSB#0 and SSB#1)	-	102

Table 7.6.3.6.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations (R4)

	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	1
Highest DIFF RSRP reported (SSB#0)	-	7

For the test to pass, the ratio of successful reported valued for each requirement (R1 to R4) shall be at least 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.6.4 CLI measurements

7.6.4.0 Minimum conformance requirements

7.6.4.0.1 Minimum conformance requirements for SRS-RSRP measurement period

The UE shall be capable of performing SRS-RSRP measurement based on the configured SRS resource, and the UE shall be capable of reporting SRS-RSRP measured over measurement period of $T_{SRS_RSRP_measurement_period}$ for FR1 and FR2.

Table 7.6.4.0.1-1 Measurement period $T_{SRS_RSRP_measurement_period}$

Configuration	$T_{SRS_measurement_period}$ (ms)
No DRX	Max(60, 3 X T_{SRS})
DRX cycle ≤ 320ms	Max(60, Ceil(1.5 X 3) X max(T_{SRS}, T_{DRX}))
DRX cycle > 320ms	3 X T_{DRX}
Note: T_{SRS} is SRS measurement periodicity configured *SRS-PeriodicityAndOffset*, and T_{DRX} is the DRX cycle length.	

If the SRS resources configured for measurement are partially or fully overlapping with SMTC window, SSB or CSI-RS configured for RLM, BFD, CBD or L1-RSRP measurement or measurement gaps, requirements are not specified for $T_{SRS_RSRP_measurement_period}$.

When configured by the network, the UE shall be able to perform SRS-RSRP measurements of configured *srs-ResourceConfigCLI*. The requirements apply when the subcarrier spacing for SRS-RSRP measurement resource configuration is the same as the subcarrier spacing of the active DL BWP of serving cell. The UE is not required to measure SRS using different SCS compared to the downlink active BWP SCS of the same carrier.

The requirements as provided:

- SRS resources configured for SRS-RSRP measurements are measurable.

An SRS resource configured for SRS-RSRP shall be considered measurable when for each relevant SRS the following conditions are met:

- SRS-RSRP related side conditions given in clauses 10.1.22.1 for FR1 and FR2 for a corresponding band,
- SRS_RP and SRS Ês/Iot according to Annex B.2.7 for a corresponding band.

The UE shall send SRS-RSRP reports only for report configurations according to *reportType* which is *cliPeriodical* or *cliEventTriggered* when SRS-RSRP report is configured.

The UE shall report the SRS-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.22.1 for FR1 and FR2.

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.1.

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.22.1.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.7.2.3.3.

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.1.

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report on.

The normative reference for this requirement is TS 38.133 [6] clause 9.7.2.5 and 9.7.2.1, 9.7.2.2 and 9.7.2.3

7.6.4.1 NR SA FR2 SRS-RSRP measurement in non-DRX

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD

- The test applicability is FFS

- The test procedure is incomplete

- The message content is FFS

- MU/TT analysis for UE PC3 and test frequency f ≤ 40.8 GHz is complete.

- MU/TT analysis for UE power class other than PC3 is incomplete.

- MU//TT analysis for test frequency f > 40.8 GHz is incomplete.

7.6.4.1.1 Test purpose

The purpose of this test case is to verify that the UE makes correct reporting of SRS-RSRP measurement in non-DRX within SRS-RSRP measurement requirements in TS 38.133 [6] clause 9.7.2.5

7.6.4.1.2 Test applicability

FFS

7.6.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.4.0.1

The normative reference for this requirement is TS 38.133 [6] clause 9.7.2.5 and A.7.6.4.1.

7.6.4.1.4 Test description

One cell is deployed in the test, which is FR2 PCell (Cell 1).

7.6.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.4.1.4.1-1.

Table 7.6.4.1.4.1-1: Supported test configurations

Test Case ID	Description
7.6.4.1 - 1	NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.6.4.1.4.1-2.

Table 7.6.4.1.4.1-2: Initial conditions SA FR2 SRS-RSRP measurement in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters are given in Table 7.6.4.1.4.1-3 below.

2. Message contents are defined in clause 7.6.4.1.4.3.

3. One cell is deployed in the test, which is FR2 PCell (Cell 1).. The test parameters for PSCell is given in Table 7.6.4.1.4.1-3

4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

Table 7.6.4.1.4.1-3: General test parameters for SRS-RSRP event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	
RF Channel Number		1	1: Cell 1	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	
SRS configuration		1	SRSConf.1	Table 7.6.4.1.5-3
CP length		1	Normal	
i1-Threshold	dBm	1	-112	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1	OFF	Non-DRX
Time offset between DL from serving cell and SRS from test system	µs	1	10.67	
T1	s	1	5	
T2	s	1	1	

7.6.4.1.4.2 Test procedure

There is one cell is deployed in the test, which is FR2 PSCell (Cell 1)

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table 7.6.4.1.5-3 and the test parameters for the (virtual) neighbour cell UE in Table 7.6.4.1.5-2. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 7.6.4.1.5-1 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1 with event I1 configured..
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.

<rest of the steps are FFS >

7.6.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

FFS

7.6.4.1.5 Test requirement

Table 7.6.4.1.5-1 defines the cell specific settings for all tests. Table 7.6.4.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

Table 7.6.4.1.5-1: NR Cell specific test parameters for SA SRS-RSRP event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS configuration			TRS.2.1. TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
Propagation Condition		1	AWGN	

Table 7.6.4.1.5-2: NR OTA Cell specific test parameters for SA SRS-RSRP event triggered reporting for PCell and neighbour cell UE in FR2

Parameter	Unit	Test configuration	Cell 1		Neighbour cell UE	
			T1	T2	T1	T2
AoA setup		1	Setup 1 defined in A.9.1			
Beam assumption Note 4		1	Fine			
N_{oc} Note 2	dBm/15 kHz	1	-100.5		-100.5	
N_{oc} Note 2	dBm/SCS	1	-91.5		-91.5	
$\hat{E}_s / I_{ot}$	dB	1	-	-	-infinity	7
$\hat{E}_s / N_{oc}$	dB	1	-	-	-infinity	7
SRS-RSRP Note 3	dBm/SCS kHz	1	-	-	-infinity	-84.5
Io	dBm/95.04 MHz	1	-63.86	-56.07	-63.86	-56.07

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5:	Cell 2 doesn't transmit during the SRS and the 2 previous symbols. Es/NoC is not applied to those symbols.

Table7.6.4.1.5-3: SRS configuration for measurement reporting

	Field	SRSConf.1	Comments
SRS-ResourceSet	srs-ResourceSetId	0	
	srs-ResourceIdList	0	
	resourceType	Periodic	
	Usage	Codebook	
SRS-Resource	SRS-ResourceId	0	
	nrofSRS-Ports	Port1	
	transmissionComb	n2	
	combOffset-n2	0	
	cyclicShift-n2	0	
	resourceMapping startPosition	0	
	resourceMapping nrofSymbols	n1	
	resourceMapping repetitionFactor	n1	
	freqDomainPosition	0	
	freqDomainShift	0	
	freqHopping c-SRS	12	
	freqHopping b-SRS	0	
	freqHopping b-hop	0	
	groupOrSequenceHopping	Neither	
	resourceType	Periodic	
	periodicityAndOffset	sl40, 25	
	sequenceId	0	Any 10 bit number

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 60 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.4.2 NR SA FR2 CLI-RSSI measurement in non-DRX

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD

- The test applicability is FFS

- The test procedure is incomplete

- The message content is FFS

- TT analysis is missing.

7.6.4.2.1 Test purpose

The purpose of this test case is to verify that the UE makes correct reporting of CLI-RSSI measurement in non-DRX within CLI-RSSI measurement requirements in TS 38.133 [6] clause 9.7.3.5

7.6.4.2.2 Test applicability

FFS

7.6.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.4.0.1

The normative reference for this requirement is TS 38.133 [6] clause 9.7.2.5 and A.7.6.4.2.

7.6.4.2.4 Test description

One cell is deployed in the test, which is FR2 PCell (Cell 1).

7.6.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.4.2.4.1-1.

Table 7.6.4.2.4.1-1: Applicable NR configurations for FR2 CLI-RSSI test

Configuration	Description
1	NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.6.4.2.4.1-2.

Table 7.6.4.2.4.1-2: Initial conditions SA FR2 CLI-RSSI measurement in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters are given in Table 7.6.4.2.4.1-3 below.
2. Message contents are defined in clause 7.6.4.2.4.3.
3. One cell is deployed in the test, which is FR2 PCell (Cell 1).. The test parameters for PSCell is given in Table 7.6.4.2.4.1-3
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

Table 7.6.4.2.4.1-3: General test parameters for CLI-RSSI event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	NR Cell 1	
RF Channel Number		1	1: Cell 1	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	

CLI-RSSI configuration		1	CLI-RSSIConf.1	Table7.6.4.2.5-3
CP length		1	Normal	
i1-Threshold	dBm	1	-94.5	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	Non-DRX
Time offset between DL from serving cell and OCNG from test system	μs	1	10.67	
T1	s	1	5	
T2	s	1	1	

7.6.4.2.4.2 Test procedure

There is one cell is deployed in the test, which is FR2 PSCell (Cell 1)

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table 7.6.4.2.5-3 and the test parameters for the (virtual) neighbour cell UE in Table 7.6.4.2.5-2. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 7.6.4.2.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1 with event I1 configured..
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.

<rest of the steps are FFS >

7.6.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

FFS

7.6.4.2.5 Test requirement

Table 7.6.4.2.5-1 defines the cell specific settings for all tests. Table 7.6.4.2.5-2 defines the OTA primary level settings including test tolerances for all tests.

Table 7.6.4.2.5-1: : NR Cell specific test parameters for CLI-RSSI event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
PUSCH parameters		1	N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns Note 1		1	OP.1	
TRS configuration			TRS.2.1. TDD	

PDSCH/PDCCH TCI state		1	TCI.State.2
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1
Active DL BWP configuration		1	DLBWP.1.1
Active UL BWP configuration		1	ULBWP.1.1
Propagation Condition		1	AWGN
Note 1: OCNG is not transmitted in the CLI-RSSI measurement resources.			

Table 7.6.4.2.5-2: NR OTA Cell specific test parameters for CLI-RSSI event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
AoA setup		1	Setup 1 defined in A.9.1	
Beam assumption Note 3		1	Fine	Fine
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/15 kHz	1	-119+TT	-108+TT
N_{oc} on CLI-RSSI measurement resource Note 2	dBm/SCS	1	-110	-99
Io on CLI-RSSI measurement resource	dBm/95.04 MHz	1	-81.01	-70.01
Io on CLI-RSSI measurement resource	dBm/1.08 MHz	1	-100.46	-89.46
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.				

Table7.6.4.2.5-3: CLI-RSSI measurement resource configuration for measurement reporting

	Field	CLI-RSSIConf.1
RSSI-Resource	rssi-ResourceId	0
	rssi-SCS	120
	startPRB	0
	nrofPRBs	66
	startPosition	3
	nrofSymbols	11
	rssi-PeriodicityAndOffset	sl40, 25

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 5ms from the beginning of time period T2. The nominal RSSI used to evaluate the requirement shall be based on Io.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.5 NR measurements with autonomous gaps

7.6.5.0 Minimum conformance requirements

7.6.5.0.1 Minimum conformance requirements for SA inter-frequency CGI reporting in autonomous gaps test (PCell in FR2)

7.6.5.0.1.1 Minimum conformance requirements for interruptions when identifying CGI of an NR cell with autonomous gaps

[TS38.133, Clause 8.2.1.2.16]

When a UE is identifying CGI of an NR cell with autonomous gaps, the UE is allowed interruptions on PSCell or any activated SCell:

- with up to K1 interruptions with interrupted slots up to interruption length X1 specified in Table 7.6.5.0.1.1-1 for each interruption during MIB decoding time period T_{MIB} (ms) specified in clause 7.6.5.0.1.2.
- with up to L1 interruptions with interrupted slots up to interruption length Y1 specified in Table 7.6.5.0.1.1-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 7.6.5.0.1.2 for SSB and CORESET for RMSI scheduling multiplexing patterns 1.
- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 7.6.5.0.1.1-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 7.6.5.0.1.2 for SSB and CORESET for RMSI scheduling multiplexing patterns 2 and 3.

Where:

- K1 = 6 for the target cell carrier frequency on FR1 and K1 = 25 for the target cell carrier frequency on FR2, and
- L1 = $T_{SIB1}/20$, and
- L2 = T_{SIB1}/T_{SMTC}, where T_{SMTC} is the periodicity of the SMTC occasion configured for the target cell carrier.

Table 7.6.5.0.1.1-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19
3	0.125	48	49	37

7.6.5.0.1.2 Minimum conformance requirements for NR measurements with autonomous gaps

[TS 38.133, Clause 9.11]

7.6.5.0.1.2.1 Introduction

The requirements in this clause are applicable for CGI identification of an intra frequency and inter frequency NR target cell.

The requirements in this clause are specified for CGI identification of an NR target cell and are applicable for a UE:

- in RRC_CONNECTED state, and
- configured with SA or NR-DC or NE-DC operation mode, or with EN-DC operation mode for CGI identification requested by NR PSCell.

The overall CGI reporting delay is defined in clause 7.6.5.0.1.2.3.

The measurement reporting delay can be longer for the measurement reporting requirements in this clause when IDC autonomous denial is configured.

7.6.5.0.1.2.2 CGI identification of an NR cell with autonomous gaps

The UE shall identify and report the CGI of a known NR target cell when requested by the network for the purpose of reportCGI. Only one cell is provided to the UE with *cellForWhichToReportCGI* for identifying the CGI. The UE may make autonomous gaps in both downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3 in TS 38.331 [13]. Note that a UE is not required to use autonomous gap if *useAutonomousGaps* is set to false. If autonomous gaps are used for measurement with the purpose of reportCGI, regardless of whether DRX is used or not, or whether SCell(s) are configured or not, the UE shall be able to identify a new CGI of NR cell within:

$$T_{identify_CGI} = (T_{MIB} + T_{SIB1})\ ms$$

Where:

T_{MIB} is the time period used to acquire MIB message. $T_{MIB} = 6 * T_{SMTC}$ ms for target cell carrier frequency on FR1 and $T_{MIB} = 25 * T_{SMTC}$ ms for target cell carrier frequency on FR2.

T_{SIB1} is the time period used to acquire SIB1 message. $T_{SIB1} = 6 * T_{RMSI\text{-}scheduling}$ ms.

Where T_{SMTC} is the SMTC periodicity configured for the target cell measurement, and $T_{RMSI\text{-}scheduling}$ is

- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and 20ms when SSB and RMSI CORESET multiplexing pattern is 1
- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and T_{SMTC} when SSB and RMSI CORESET multiplexing pattern is 2 or 3.

The requirement for identifying the CGI of an NR cell within $T_{identify_CGI}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [13] is used.

Within the time $T_{identify_CGI}$, over which the UE identifies the CGI of an NR cell, the UE shall fulfil interruption requirements specified in,

- Clause 8.2.1.2.16 in TS 38.133 [6] for NR serving cells and Clause 7.32.2.15 in TS36.133 [29] for E-UTRA serving cells if the UE is configured with EN-DC operation mode,
- Clause 8.2.2.2.14 in TS 38.133 [6] if the UE is configured with SA operation mode,
- Clause 8.2.3.2.14 in TS 38.133 [6] for NR serving cells and Clause 7.36.2.14 in TS36.133 [29] for E-UTRA serving cells if the UE is configured with NE-DC operation mode,
- Clause 8.2.4.2.11 in TS 38.133 [6] if the UE is configured with NR-DC operation mode.

In the requirement a cell is known if,

- During the last 5 seconds for FR1 or 3 seconds for FR2 before the reception of the report CGI command:
  - The UE has sent a valid L3-RSRP measurement report with SSB index for the target cell and
- During MIB decoding at least reported SSBs remains detectable according to the cell identification conditions specified in clauses 9.2 or 9.3 in TS 38.133 [6], and
- During SIB1 decoding the SSB used for MIB decoding remains detectable according to the cell identification conditions specified in clauses 9.2 or 9.3 in TS 38.133 [6], and
- During MIB decoding, the SSB for MIB decoding remains detectable with SNR $\geqslant$-3dB
- During SIB1 decoding, the PDSCH for SIB1 decoding remains detectable with SNR $\geqslant$-3dB

7.6.5.0.1.2.3 CGI reporting delay

The CGI reporting delay is defined as the time between a command that will trigger a CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This

measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI}$ defined in clause 7.6.5.0.1.2.2 plus RRC procedure delay defined in clause 12 in TS 38.331 [13], and additional 20ms margin if target cell is on FR2.

7.6.5.1 SA inter-frequency CGI reporting in autonomous gaps test (PCell in FR2)

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing
- TT analysis is missing

7.6.5.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an CGI. This test will partly verify the SA inter-frequency NR cell search requirements in clause 8.2.1.2.16 and 9.11 in TS 38.133 [6].

7.6.5.1.2 Test applicability

This test applies to all types of NR SA UE Rel-16 and forward supporting with PCell in FR2 and supporting acquisition of CGI from neighbour NR cell using autonomous gap, which is controlled by CGI reporting pc_nr_CGI_Reporting.

7.6.5.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.6.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.5.1.

7.6.5.1.4 Test description

In this test, there are two cells: NR Cell 1 as PCell in FR2 on NR RF channel 1 and NR Cell 2 as neighbour cell in FR2 on NR RF channel 2.

Measurement gap patterns are configured. During T1 the UE shall report event A3 for cell 2. Within 3 seconds of the event report, the test equipment shall add a measurement reporting configuration using *ReportConfigNR* which contains a *ReportCGI* IE with *cellForWhichToReportCGI* set to the physical Cell ID of cell 2 and including the optional IE *useAutonomousGaps-r16*.

In the measurement control information, it is indicated to the UE to decode the CGI of the neighbour cell using autonomous gaps. The test consists of two time phases, T1 and T2. Time period T2 begins 10ms after the test equipment has transmitted the RRC reconfiguration message containing the *ReportCGI* IE.

7.6.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.5.1.4.1-1.

Table 7.6.5.1.4.1-1: SA inter-frequency CGI reporting test in autonomous gaps

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.6.5.1.4.1-2.

Table 7.6.5.1.4.1-2: Initial conditions for EN-DC PSCell FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clause 7.2.3 for E-UTRA and 7.2.3 for NR.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	Figure A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	Figure A.3.4.1.1	

Exceptions to connection diagram	N/A	

1. The general test parameters for NR cells are given in Table 7.6.5.1.4.1-3 below. Cell-specific parameters of NR cells are specified in Table 7.6.5.1.5-1.
2. Message contents are defined in clause 7.6.5.1.4.3.
3. There are two NR cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to clause C.1.1 and C.1.2 for this test.

Table 7.6.5.1.4.1-3: General test parameters for SA inter-frequency CGI reporting in autonomous gaps

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies are used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1 in TS 38.133 [6].
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2 in TS 38.133 [6]
SI-RNTI scheduling rate	ms		40 ms	S-RNTI scheduled on four occasions per 160ms transmission period
A3-Offset	dB	Config 1	-30	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells
T1	s	Config 1	<10	UE expected to report event A3 for cell 2 within 5.2s (PC1) or 3.5s (other PC) of the start of T1. Test equipment shall configure CGI reporting within 3s after receiving the event A3 report. T2 begins 10ms after test equipment has transmitted the RRC reconfiguration to configure CGI reporting.
T2	s	Config 1	1	

7.6.5.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR SA*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.4. UE is connected to Cell 1 (PCell) on NR RF channel 1. NR Cell 2 is also on NR RF channel 1. Set the parameters according to Tables 7.6.5.1.4.1-3 and 7.6.5.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

2. The SS starts sending PDCCHs indicating new transmissions continuously on Cell 1.
3. T1 starts. At this moment, the UE does not have any timing information of Cell 2.
4. During T1, UE reports event A3 for Cell 2. Within 3 seconds of the event report, the test equipment shall add a measurement reporting configuration using *ReportConfigNR* which contains a *ReportCGI* IE with *cellForWhichToReportCGI* set to the physical Cell ID of cell 2 and including the optional IE *useAutonomousGaps-r16*.
5. T2 starts 10 ms after the test equipment has transmitted the RRC reconfiguration message containing the *ReportCGI* IE.
6. If the UE transmits a measurement report containing the cell global identifier of Cell 2 within 765 ms from the start of T2, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
7. If it is successful, continue to step 9. Otherwise continue to step 8.
8. Switch the UE OFF and then ON. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity *NR SA*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.4.
9. Repeat steps 2-8 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.5.1.4.3 Message contents

TBD

7.6.5.1.5 Test requirement

Table 7.6.5.1.5-1 defines the cell specific test parameters, not including test tolerances yet.

Editor's note: will be updated after TT analysis.

Table 7.6.5.1.5-1: Cell specific test parameters SA inter-frequency CGI reporting in autonomous gaps

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15 in TS 38.133 [6]			
				AoA1		AoA2	
Beam Assumption[Note 7]			1,2	Rough			
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		Not sent	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	

PDSCH/PDCCH subcarrier spacing	kHz	Config 1	120	120
TRS configuration		Config 1	TRS.2.1 TDD	N/A
TCI configuration		Config 1	CSI-RS.Config.0	N/A
EPRE ratio of PSS to SSS		Config 1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz Note5		-99.03 + TT	-99.03 + TT
N_{oc} Note2	dBm/SCS Note4	Config 1	-90 + TT	-90 + TT
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-87 + TT	-93 + TT
$\hat{E}_s / I_{ot}$	dB	Config 1	3 + TT	-3 + TT
$\hat{E}_s / N_{oc}$	dB	Config 1	3 + TT	-3 + TT
Io Note3	dBm/95.04 MHz Note5	Config 1	-56.25 + TT	-59.25 + TT
Propagation Condition		Config 1	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6], and does not limit UE implementation or test system implementation

The UE shall report the CGI of cell 2 within 25*Tsmtc + 6*Tsi-rnti+20ms +2ms= 762ms from the start of T2, allow 765ms. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall be scheduled continuously throughout the test, and from the start of T3 until 775 ms the number of interrupted slots shall not exceed the allowed number as defined in clause 8.2.2.2.14 in TS 38.133 [6].

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.6 L1-SINR measurement for beam reporting

7.6.6.0 Minimum conformance requirements

7.6.6.0.1 L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured

Same as clause 5.6.5.0.1

The normative reference for this requirement is TS 38.133 [6] clause 9.8.3, 9.8.4.1 and 9.8.5.

7.6.6.0.2 L1-SINR reporting with SSB based CMR and dedicated IMR configured

Same as clause 5.6.5.0.2

The normative reference for this requirement is TS 38.133 [6] clauses 9.8.3, 9.8.4.2 and 9.8.5.

7.6.6.0.3 L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured

Same as clause 5.6.5.0.3

The normative reference for this requirement is TS 38.133 [6] clauses 99.8.3, 9.8.4.3 and 9.8.5.

7.6.6.1 NR SA FR2 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in non-DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test case is incomplete for extreme conditions

7.6.6.1.1 Test purpose

To verify that the UE makes correct reporting of L1-SINR measurement in non-DRX within L1-SINR measurement requirements in TS 38.133 [6] clause 9.8.4.1.

7.6.6.1.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and supporting L1-SINR measurement.

7.6.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.6.1.

7.6.6.1.4 Test description

7.6.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.6.1.4.1-1.

Table 7.6.6.1.4.1-1: Applicable NR configurations for FR2 CSI-RS based CMR and no dedicated IMR L1-SINR measurement

Config	Description

1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 7.6.6.1.4.1-2: General test parameters for FR2 CSI-RS based CMR and no dedicated IMR L1-SINR measurement

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		Off
reportConfigType	1		aperiodic
reportQuantity	1		cri-SINR
reportQuantity-r16	1		cri-SINR-r16
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1		26
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 7.6.6.1.4.1-3: Test Environment parameters for FR2 CSI-RS based CMR and no dedicated IMR L1-SINR measurement

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.6.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.6.1.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

7.6.6.1.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. UE is also configured to measure L1-SINR based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in table 7.6.6.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On,* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.6.1.5-1. T1 starts.

3. After 160ms from the start of the test the SS transmits the DCI trigger in slot 8.

4. The SS shall check following requirements:

   - R1: the UE shall send L1-SINR report at slot 26 from the reception of DCI trigger. If the report is received at slot 26 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the L1-SINR value of CSI-RS#1 reported by the UE is compared to the expected L1-SINR value for CSI-RS #1. If the resulting value is outside the limits in Table 7.6.6.1.5-2 or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   -R3: The DIFF SINR value of CSI-RS #0 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 7.6.6.1.5-3 or the UE fails to report the measurement value for CSI-RS #0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

6. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

7. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.6.6.1.4.3-1: Common Exception messages for FR2 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions APERIODIC and CSI-SINR Table H.3.6A-2 with conditions CSI-RS and APERIODIC

Table 7.6.6.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
}			
}			

7.6.6.1.5 Test requirement

Table 7.6.6.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.6.1.5-1: CSI-RS specific test parameters for NR SA FR2 CSI-RS-based L1-SINR measurement in non-DRX

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.9.1	
Beam assumption Note 3	1		Rough	
N_{oc} Note1	1	dBm/15kHz	-105	
N_{oc} Note1	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP Note3	1	dBm/SSB SCS	-95.97	-86.97
Io Note2	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

After 160ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1. Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 7.6.6.1.5-2 the corresponding relative accuracy requirements in Table 7.6.6.1.5-3.

Table 7.6.6.1.5-2: L1-SINR absolute accuracy requirements for the reported values R2

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	51
Highest reported value (CSI-RS#1)	74

Table 7.6.6.1.5-3: L1-SINR relative accuracy requirements for the reported values R3

	T1
Lowest DIFF SINR reported (CSI-RS#0)	4
Highest DIFF SINR reported (CSI-RS#0)	13

The rate of correct events observed during repeated tests (R1 to R3) shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.6.2 NR SA FR2 SSB based CMR and dedicated IMR L1-SINR measurement in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test case is incomplete for extreme conditions

7.6.6.2.1 Test purpose

To verify that the UE makes correct reporting of L1-SINR measurement in DRX within L1-SINR measurement requirements in TS 38.133 [6] clause 9.8.4.2.

7.6.6.2.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards, supporting long DRX cycle and L1-SINR measurement.

7.6.6.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.6.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.6.2.

7.6.6.2.4 Test description

7.6.6.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.6.2.4.1-1.

Table 7.6.6.2.4.1-1: Applicable NR configurations for FR2 SSB based CMR and CSI-IM based IMR L1-SINR measurement

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 7.6.6.2.4.1-2: General test parameters for FR2 SSB based CMR and CSI-IM based IMR L1-SINR measurement

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
CSI-IM configuration	1~2		CSI-IM.3.1 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		periodic
reportQuantity-r16	1~2		ssb-Index-SINR-r16
Number of reported RS	1~2		2
L1-SINR reporting period	1~2	slot	640
T1	1~2	s	5
T2	1~2	s	2
Propagation condition	1~2		AWGN
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 7.6.6.2.4-3: Test Environment parameters for FR2 SSB based CMR and CSI-IM based IMR L1-SINR measurement

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.6.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.6.2.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

7.6.6.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.6.6.2.4.1-2. Before the test, UE is configured to perform RLM, BFD and L1-SINR measurement based on the SSBs.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 6.6.4.1.4.1-2.

2. Set the parameters according to T1 in Table 7.6.6.2.5-1. T1 starts.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 640 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 7.6.6.2.5-1. T2 starts.

5. The UE shall start sending valid L1-SINR reports. The SS shall check the following requirements:

   - R1: the UE shall start to transmit valid L1-SINR reports no later than 2960ms for UE supporting power class 1 in configuration 1, no later than 2920ms for UE supporting power class 1 in configuration 2, no later than 2000ms for UE supporting power class other than 1 in configuration 1 and no later than 1960 ms for UE supporting power class other than 1 in configuration 2 from the beginning of time period T2. A valid report shall meet the absolute L1-SINR requirements for SSB#1 Table 7.6.6.2.5-2 for all test configurations. If the first valid report is received before the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the UE shall transmit L1-SINR reports every 640 slots. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   -R3: The L1-SINR value of SSB#1 reported by the UE is compared to the expected L1-SINR value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding absolute accuracy requirements in Table 7.6.6.2.5-2 for all test configurations, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   -R4: The DIFF-SINR value of SSB#0 reported by the UE is compared to the expected DIFF-SINR value. In all consecutive reports after the first valid value is received, if the resulting value is outside the corresponding relative accuracy requirements in Table 7.6.6.2.5-3 for all test configurations, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. After the RRC connection release, the SS:

- transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
or:
- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.6.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.6.2.4.3-1: Common Exception messages for FR2 SSB based CMR and CSI-IM based IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and SS-SINR and CSI-IM_IMR Table H.3.6A-2 with conditions SSB and PERIODIC Table H.3.6A-4 with condition PERIODIC Table H.3.7-1 with condition DRX.3 Table H.3.4-1

Table 7.6.6.2.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

7.6.6.2.5 Test requirement

Table 7.6.6.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.6.2.5-1: SSB specific test parameters for FR2 SSB based CMR and CSI-IM based IMR L1-SINR measurement

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration	1~2		Setup 1 according to A.9.1			
Beam assumption Note 4	1~2		Rough			
N_{oc} Note2	1~2	dBm/15kHz	-105			
	1	dBm/SSB SCS	-96			

N_{oc} Note2	2		-93			
$\hat{E}_s / I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB RSRP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-64	-64	-67	-57.5
	2		-64	-64	-67	-57.5
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall send L1-SINR report every 640 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-SINR report including the results for both SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 while meeting the accuracy requirements defined in clause 10.1.28.2, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 7.6.6.2.5-2 for all test configurations and the corresponding relative accuracy requirements in Table 7.6.6.2.5-3 for all test configurations.

Table 7.6.6.2.5-2: L1-SINR absolute accuracy requirements for the reported values for all test configurations R1 and R3

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	53
Highest reported value (SSB#1)	-	72

Table 7.6.6.2.5-4: L1-SINR relative accuracy requirements for the reported values for all test configurations R4

	T1	T2
Lowest DIFF SINR reported (SSB#0)	-	5
Highest DIFF SINR reported (SSB#0)	-	12

For the test to pass, the ratio of successful reported valued for each requirement (R1 to R4) shall be at least 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.6.3 NR SA FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- Normal conditions

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test case is incomplete for extreme conditions

7.6.6.3.1 Test purpose

To verify that the UE makes correct reporting of L1-SINR measurement in DRX within L1-SINR measurement requirements in TS 38.133 [6] clause 9.8.4.3.

7.6.6.3.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards and supporting long DRX cycle and L1-SINR measurement.

7.6.6.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.6.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.6.3.

7.6.6.3.4 Test description

7.6.6.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.6.3.4.1-1.

Table 7.6.6.3.4.1-1: Applicable NR configurations for FR2 CSI-RS based CMR and CSI-RS based IMR L1-SINR measurement

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 7.6.6.3.4.1-2: General test parameters for FR2 CSI-RS based CMR and CSI-RS based IMR L1-SINR measurement

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS as CMR configuration	1		CSI-RS.3.3 TDD
CSI-RS as IMR configuration	1		CSI-RS.3.2A TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD

PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		DRX.3
reportConfigType	1		aperiodic
reportQuantity-r16	1		cri-SINR-r16
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1		26
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 7.6.6.3.4.1-3: Test Environment parameters for FR2 CSI-RS based CMR and CSI-RS based IMR L1-SINR measurement

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.6.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.6.6.3.4.3.

2. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

7.6.6.3.4.2 Test procedure

The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. UE is also configured to measure L1-SINR based on SSB. Upon receiving the DCI trigger, UE provides the report back based on the reporting configuration as defined in table 7.6.6.3.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.6.3.5-1. T1 starts.

3. After 1440ms from the start of the test the SS transmits the DCI trigger in slot 8.

4. The SS shall check following requirements:

   - R1: the UE shall send L1-SINR report at slot 26 from the reception of DCI trigger. If the report is received at slot 26 from the reception of DCI trigger, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the L1-SINR value of CSI-RS#1 reported by the UE is compared to the expected L1-SINR value for CSI-RS #1. If the resulting value is outside the limits in Table 7.6.6.3.5-2 or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   -R3: The DIFF SINR value of CSI-RS #0 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 7.6.6.3.5-3 or the UE fails to report the measurement value for CSI-RS #0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

6. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

7. After the RRC connection release, the SS:

   - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),
   or:
   - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

8. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.6.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.6.6.3.4.3-1: Common Exception messages for FR2 CSI-RS based CMR and CSI-RS based IMR L1-SINR measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions APERIODIC and CSI-SINR and CSI-RS_IMR Table H.3.6A-2 with conditions CSI-RS and APERIODIC Table H.3.6A-3 with conditions APERIODIC Table H.3.7-1 with condition DRX.3 Table H.3.4-1

Table 7.6.6.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	

}			
}			

7.6.6.3.5 Test requirement

Table 7.6.6.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.6.3.5-1: CSI-RS specific test parameters for NR SA FR2 CSI-RS-based CMR and CSI-RS based IMR L1-SINR measurement

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.9.1	
Assumption for UE beams Note 3	1~2		Rough	
N_{oc} Note1	1~2	dBm/15kHz	-105	
N_{oc} Note1	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	1.5	9
CSI-RS RSRP Note2	1~2	dBm/SSB SCS	-94.5	-87.0
Io Note2	1~2	dBm/95.04MHz	-63.2	-57.5
$\hat{E}_s / N_{oc}$	1~2	dB	1.5	9

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

After 1440ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-RS#0 as IMR and CSI-RS#1 as CMR + CSI-RS#1 as IMR. Each L1-SINR measurement report shall meet the corresponding absolute accuracy requirements in Table 7.6.6.3.5-2 the corresponding relative accuracy requirements in Table 7.6.6.3.5-3.

Table 7.6.6.3.5-2: L1-SINR absolute accuracy requirements for the reported values R2

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	54
Highest reported value (CSI-RS#1)	71

Table 7.6.6.3.5-3: L1-SINR relative accuracy requirements for the reported values R3

	T1
Lowest DIFF SINR reported (CSI-RS#0)	4
Highest DIFF SINR reported (CSI-RS#0)	10

The rate of correct events observed during repeated tests (R1 to R3) shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.7 to 7.6.12

7.6.13 UE Rx-Tx time difference measurements for PDC

7.6.13.0 Minimum conformance requirements

7.6.13.0.1 PRS based UE Rx-Tx time difference for propagation delay compensation

When UE is configured with *prs-Ref-r17* in *MeasObjectRxTxDiff*-r17 defined in TS 38.331 [2] and provided with PRS resource configuration, the UE shall be able to measure UE Rx-Tx time difference on PCell within the measurement period $T_{UERx-Tx_PRS}$, where:

$$T_{UERxTx,PRS} = \left\lceil \frac{N_{PRS}^{slot}}{N'} \right\rceil * N_{sample} * K_{layer3} * LCM(T_{PRS}, T_{DRX})$$

Where:

N_{PRS}^{slot} is the maximum number of DL PRS resources configured in a slot,

N′ is UE capability for number of DL PRS resources that it can process in a slot corresponding to *maxNumberPRS-ResourceProcessedPerSlot-r17* as specified in TS38.331 [2],

N_{sample} is the number of UE Rx-Tx time difference measurement samples and N_{sample} = 4,

T_{PRS} is the PRS resource periodicity specific for RTT-based propagation delay compensation,

T_{DRX} is the DRX cycle length when DRX is in use, 1ms otherwise.

K_{layer3} is

N_{total} / $N_{available}$, when $N_{available}$>0

Where,

- For a window W of duration LCM(T_{PRS}, MGRP_max, T_{SMTC}), where T_{SMTC} is the periodicity of SMTC for intra-frequency measurement without gap, and MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as the PDC PRS for UE supporting *concurrentMeasGap-r17*, or is the MGRP of configured per-UE measurement gap or per-FR measurement gap within the same FR as the PDC PRS for UE not supporting *concurrentMeasGap-r17*,starting at the beginning of any PRS resource occasion:
  - N_{total} is the total number of PRS resource occasions within the window W, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
  - $N_{available}$ is the number of PRS resource occasions that are not overlapped with:
    - For FR2: any measurement gap occasions nor any SMTC occasions within window W. And for a UE supporting *concurrentMeasGap-r17* after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 nor any SMTC occasions within the window W.

No requirements shall apply if $N_{available}$=0.

UE is only required to perform UE Rx-Tx time difference on PRS within the active DL BWP.

When UE is configured to perform UE Rx-Tx time difference measurement based on PRS, the requirements apply provided that the SCS of the PRS is same as that of the active BWP on PCell.

For FR2, the requirements apply if QCL information is provided for all the PRS resources in the resource set and for each resource one RS has QCL-TypeD.

If PRS resources overlap with Type 1A/1B/2 PPW, the UE is allowed longer measurement period to measure UE Rx-Tx time difference on PCell.

The UE Rx-Tx time difference measurement values contained in measurement report shall be based on the measurement report mapping requirements specified in clause 10.1.25.3, with k = 5.

The reporting range for the absolute UE Rx-Tx time difference measurement (TUE Rx-Tx) is defined from -985024×Tc to 985024×Tc with the resolution step of 2k×Tc.

Table 7.6.13.0.1-1: Absolute UE Rx-Tx time difference measurement report mapping for k=5

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \le T_{UE\ Rx-Tx} < -984992$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-984992 \le T_{UE\ Rx-Tx} < -984960$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_30782	$-32 \le T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_30783	$0 \le T_{UE\ Rx-Tx} < 32$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_61563	$984960 \le T_{UE\ Rx-Tx} < 984992$	T_c
RX-TX_TIME_DIFFERENCE_61564	$984992 \le T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_61565	$985024 \le T_{UE\ Rx-Tx}$	T_c

The error in the reported value of UE Rx-Tx time difference measurement, including both the measurement error and the reporting quantization error, should be within the accuracy requirements specified in this clause.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that:

- The UE transmits SRS within [-160, 160] msec of at least one PDC DL PRS resource from the serving cell (PCell).

When a serving cell change occurs during the UE Rx-Tx measurement period, the UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx measurement.

The accuracy requirements in Table 7.6.13.0.1-2 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band.

AWGN propagation condition.

Table 7.6.13.0.1-2: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN

Accuracy	Conditions					
	PRS $\hat{E}s/Iot$	Minimum PRS bandwidth	PRS SCS	PRS resource repetition $(T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$ Note 3	Io Note 4 range	
					Minimum Io Note 1	Maximum Io
Tc Note 5	dB	RB	kHz		dBm / SCS_{PRS}	$dBm/BW_{Channel}$
± [22+δ+ε]	-3	≥[24]	60	≥[1]	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± [15+δ+ε]		≥[64]		≥[1]	NOTE 6	NOTE 6
± [7+δ+ε]		≥[132]		≥[1]	NOTE 6	NOTE 6
± [12+δ+ε]		≥[32]	120	≥[1]	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± [7+δ+ε]		≥[64]		≥[1]	NOTE 6	NOTE 6
± [4+δ+ε]		≥[128]		≥[1]	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.
NOTE 2: NR operating band groups are as defined in Section 3.5.
NOTE 3: T_{rep}^{PRS}, L_{PRS}, K_{comb}^{PRS} are configured by higher layer parameter dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeNdefined in TS 37.355 [34].
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].

NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
NOTE 7: δ is the margin determined from Table 10.1.39.2-4.
NOTE 8: Ɛ is the margin for reporting quantitization error and Ɛ=16 Tc.

Table 7.6.13.0.1-3: Margin for UE Rx-Tx time difference measurement accuracy in FR2

Min(PRS BW, SRS BW) (MHz)		Margin (Tc [Note 1])
SCS = 60 kHz	SCS = 120 kHz	
≥ 24	N/A	76
≥ 64	≥ 32	32
≥ 132	≥ 64	24
N/A	≥ 128	20
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.		

7.6.13.0.2 TRS based UE Rx-Tx time difference for propagation delay compensation

When UE is configured with *csi-RS-Ref-r17* in *MeasObjectRxTxDiff*-r17 defined in TS 38.331 [2] and provided with TRS resource configuration, the UE shall be able to measure UE Rx-Tx time difference on PCell within the measurement period $T_{UERx-Tx_TRS}$, where:

$$T_{UERxTx,TRS} = N_{sample} * K_{layer3} * LCM(T_{TRS}, T_{DRX})$$

Where

N_{sample} is the number of UE Rx-Tx time difference measurement samples and N_{sample} is [4],

T_{TRS} is the TRS resource periodicity specific for RTT-based propagation delay compensation,

T_{DRX} is the DRX cycle length when DRX is in use, 1ms otherwise.

K_{layer3} is

N_{total} / $N_{available}$ when $N_{available}$>0

Where,

- For a window W of duration LCM(T_{TRS}, MGRP_max, T_{SMTC}) and starting at the beginning of any TRS resource occasion, where T_{SMTC} is the periodicity of SMTC for intra-frequency measurement without gap and MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as PCell for a UE that support *concurrentMeasGap-r17* and is configured with concurrent measurement gaps, otherwise MGRP_max is the MGRP of configured per-UE measurement gap or per-FR measurement gap within the same FR as PCell:
  - N_{total} is the total number of TRS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{available}$ is the number of TRS resource occasions that are not overlapped with
    - For FR2: any measurement gap occasions nor any SMTC occasions within window W. And for a UE supporting *concurrentMeasGap-r17* after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 nor any SMTC occasions within the window W.

No requirements shall apply if $N_{available}$=0.

UE is only required to perform UE Rx-Tx time difference on TRS within the active DL BWP. When UE is configured to perform UE Rx-Tx time difference measurement based on TRS, the requirements apply provided that the SCS of the TRS is same as that of the active BWP on PCell.

For FR2, the requirements apply if QCL information is provided for all the TRS resources in the resource set and for each resource one RS has QCL-TypeD.

If TRS resources overlap with Type 1A/1B/2 PPW, the UE is allowed longer measurement period to measure UE Rx-Tx time difference on PCell.

The UE Rx-Tx time difference measurement values contained in measurement report shall be based on the

measurement report mapping requirements specified in clause TS 38.133 10.1.25.3, with k = 5.

The reporting range for the absolute UE Rx-Tx time difference measurement (TUE Rx-Tx) is defined from -985024×Tc to 985024×Tc with the resolution step of 2*k*×Tc.

Table 7.6.13.0.2-1: Absolute UE Rx-Tx time difference measurement report mapping for *k*=5

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \le T_{UE\ Rx-Tx} < -984992$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-984992 \le T_{UE\ Rx-Tx} < -984960$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_30782	$-32 \le T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_30783	$0 \le T_{UE\ Rx-Tx} < 32$	T_c
…	…	…
RX-TX_TIME_DIFFERENCE_61563	$984960 \le T_{UE\ Rx-Tx} < 984992$	T_c
RX-TX_TIME_DIFFERENCE_61564	$984992 \le T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_61565	$985024 \le T_{UE\ Rx-Tx}$	T_c

The error in the reported value of UE Rx-Tx time difference measurement, including both the measurement error and the reporting quantization error, should be within the accuracy requirements specified in this clause.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall not apply, if:

- N_{TA_offset} defined in TS 38.133 Table 7.1.2-2 changes during the UE Rx-Tx measurement period or
- if the uplink transmission timing changes during the UE Rx-Tx measurement period due to the network-configured Timing Advance.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that:

- The UE transmits SRS within [-160, 160] msec of at least one PDC TRS resource from the serving cell (PCell).

When a serving cell change occurs during the UE Rx-Tx measurement period, the UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx measurement.

The accuracy requirements in 7.6.13.0.2-2 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to TS 38.133 Annex B.2.13 for a corresponding Band.

AWGN propagation condition.

Table 7.6.13.0.2-2: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN

Accuracy	Conditions				
	TRS Ês/Iot	Minimum TRS bandwidth	TRS SCS	Io[Note 3] range	
				Minimum Io[Note 1]	Maximum Io
Tc[Note 4]	dB	RB	kHz	dBm / SCS_{TRS}	dBm/$BW_{Channel}$
[29+δ+ε]	-3	≥[24]	60	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
[14+δ+ε]		≥[64]		NOTE 5	NOTE 5
[7+δ+ε]		≥[132]		NOTE 5	NOTE 5

[15+δ+ε]		≥[32]	120	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
[7+δ+ε]		≥[64]		NOTE 5	NOTE 5
[4+δ+ε]		≥[128]		NOTE 5	NOTE 5
NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol. NOTE 2: NR operating band groups are as defined in Section 3.5. NOTE 3: The Io is defined in TRS slots. The same Io range applies to TRS and non-TRS symbols. Io levels are different in TRS and non-TRS symbols within the same slot. NOTE 4: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 5: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the TRS bandwidth of the smallest RB number for the corresponding SCS. NOTE 6: δ is the margin determined from Table 10.1.39.3-4. NOTE 7: ε is the margin for reporting quantitization error and ε=16 Tc.					

Table 7.6.13.0.2-3: Margin for UE Rx-Tx time difference measurement accuracy in FR2

Min(TRS BW, SRS BW) (MHz)		Margin (Tc [Note 1])
SCS = 60 kHz	SCS = 120 kHz	
≥ 24	N/A	76
≥ 64	≥ 32	32
≥ 132	≥ 64	24
N/A	≥ 128	20
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 2: If SRS and TRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.		

7.6.13.1 NR SA FR2 UE Rx-Tx time difference measurement for propagation delay compensation using PRS

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

7.6.13.1.1 Test purpose

The purpose of the test is to verify that the UE Rx-Tx measurement for RTT-based PDC meets the requirements specified in TS 38.133[6] clause 9.12.4.1 in AWGN propagation condition in FR2 in standalone scenario.

7.6.13.1.2 Test applicability

This test applies to all types of NR UE release 17 onwards supporting *rtt-BasedPDC-PRS-r17 or gNB-SideRTT-BasedPDC-r17.*

7.6.13.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.13.0.1..

The normative reference for this requirement is TS 38.133 [6] clauses 9.12.4.1, 9.12.5, 10.1.39.2 and A.7.6.13.1.

7.6.13.1.4 Test description

7.6.13.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.13.1.4.1-1

Table 7.6.13.1.4.1-1: Supported test configurations

Config	Description
7.6.13.1-1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test requirement and the DUT according to the parameters in Table 7.6.13.1.4.1-2.

Table 7.6.13.1.4.1-2: Initial conditions for UE Tx-Rx time difference measurement for SA FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.13.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 7.6.13.1.4.1-3.
2. Message contents are defined in clause 7.6.13.1.4.3.
3. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

Table 7.6.13.1.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value
Active cell		1	Cell 1
RF Channel Number		1	1
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66
SSB configuration		1	SSB.2 FR2
SMTC configuration		1	SMTC.1
Measurement gap		1	GP#24 or GP#13 Note 1
CP length		1	Normal
DRX		1	OFF
T1	s	1	5
T2	s	1	20
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.			

7.6.13.1.4.2 Test procedure

The test is considered with one cell (Cell 1) in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. The Cell 1 mutes PRS transmission during T1 and transmits PRS during T2.

The *MeasObjectRxTxDiff-r17* is configured with *prs-Ref-r17, measObject* with *measObjectRxTxDiff-r17,* and *NR-DL-PRS-PDC-Info* is defined ~~in~~ as per 7.6.13.1.4.3 and shall be provided to the UE during T1.

The last TTI containing the RRC configuration shall be provided to the UE ΔT ms before the start of T2, where ΔT = [TBD] ms. The UE is configured to transmit SRS during T2.

The general and cell specific test parameters for PCell is given in Table 7.6.13.1.4.1-3 and Table 7.6.13.1.5-1, respectively. In the measurement control information, a measurement object is configured for the frequency of the PCell, and. The test consists of two successive time periods, with time duration of T1, and T2 respectively.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.13.1.5-1 as appropriate.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.13.1.5-1. T2 starts.

6. The UE shall transmit periodically MeasurementReport messages.

7. After 10s wait from Step 3, the SS shall check the *result-k5-r17* reported values in the periodic MeasurementReport. The result-k5 value is outside the limits in Table 7.6.13.0.1-1 or the UE fails to report the measurement value for serving cell, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

8. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

7.6.13.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table 4.6.3-76B in 38.508-1 [14] with condition PRS_REF
Specific message contents exceptions for Test Configuration 7.6.13.1-1	Table 4.6.3-84AC in 38.508-1 [14] with condition SCS120

7.6.13.1.5 Test requirements

Table 7.6.13.1.4.1-3 and Table 7.6.13.1.5-1 define the primary level settings including test tolerances for UE Rx-Tx time difference measurement with PRS for RTT-based PDC in FR2 SA.

Table 7.6.13.1.5-1: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
AoA setup		1	Setup 1 as specified in clause A.9.1	
Beam Assumption Note 4		1	Rough	
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS Configuration		1	TRS.2.1 TDD	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	

Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
PRS configuration		1	PRS.1.1 FR2	
PRS muting info		1	'10'	
SRS configuration		1	PDC-SRS.3	
N_{oc} Note 2	dBm/SCS	1	-89	
N_{oc} Note 2	dBm/15 kHz	1	-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-91
Io	dBm/95.04 MHz	1	N/A	-57.63
Propagation Condition		1	AWGN	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 7.6.13.1.5-2: SRS Configuration for FR2 Propagation Delay Compensation

	PDC-SRS.3	
Field		**Comment**
c-SRS	Same as NRB,c in the test case	
b-SRS	0	
b-hop	0	Frequency hopping is disabled
groupOrSequenceHopping	neither	No group or sequence hopping
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
pathlossReferenceRS ssb-Index	0	SSB #0 is used for SRS path loss estimation
usage	usagePDC-r17	
startPosition	5	resourceMapping setting
nrofSymbols	4	
repetitionFactor	n1	without repetition.
transmissionComb	n4	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
resourceType	Periodic	
periodicityAndOffset-p	Sl1280, 160	SRS transmission periodicity

The UE Rx-Tx time difference measurement time shall fulfils the requirements specified in clause 7.6.13.0.1. The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1, for k=5.

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 7.6.13.0.1 for Cell 1.

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.13.2 NR SA FR2 UE Rx-Tx time difference measurement for propagation delay compensation using TRS

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- The test is incomplete for UE power classes other than PC3

7.6.13.2.1 Test purpose

The purpose of the test is to verify that the UE Rx-Tx measurement for RTT-based PDC meets the requirements specified in TS 38.133[6] clause 9.12.4.2 for measurement delay and clause 10.1.39.2 for measurement accuracy in AWGN propagation condition in FR2 in standalone scenario.

7.6.13.2.2 Test applicability

This test applies to all types of NR UE release 17 onwards supporting *rtt-BasedPDC-CSI-RS-ForTracking-r17 or gNB-SideRTT-BasedPDC-r17*.

7.6.13.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.13.0.2.

The normative reference for this requirement is TS 38.133 [6] clauses 9.12.4.2, 9.12.5, 10.1.39.3 and A.7.6.13.2.

7.6.13.2.4 Test description

7.6.13.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.13.2.4.1-1

Table 7.6.13.2.4.1-1: Supported test configurations

Config	Description
7.6.13.2-1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test requirement and the DUT according to the parameters in Table 7.6.13.2.4.1-2.

Table 7.6.13.2.4.1-2: Initial conditions for UE Tx-Rx time difference measurement for SA FR2

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the test configuration selected from Table 7.6.13.2.4.1-1.	

Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 7.6.13.2.4.1-3.

2. Message contents are defined in clause 7.6.13.2.4.3.

3. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I

Table 7.6.13.2.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value
Active cell		1	Cell 1
RF Channel Number		1	1
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66
SSB configuration		1	SSB.2 FR2
SMTC configuration		1	SMTC.1
Measurement gap		1	GP#24 or GP#13 Note 1
CP length		1	Normal
DRX		1	OFF
T1	s	1	5
T2	s	1	20
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.			

7.6.13.2.4.2 Test procedure

The test is considered with one cell (Cell 1) in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 does not have TRS transmission during T1 and transmits TRS during T2.

The measurement control information with *MeasObjectRxTxDiff* set to 'csi-RS-Ref' as defined in clause 7.6.13.2.4.3 shall be provided to the UE during T1. The last TTI containing the RRC configuration shall be provided to the UE ΔT ms before the start of T2, where ΔT = [10] ms is the maximum processing time of the measurement request. The UE is configured to transmit SRS during T2.

The general and cell specific test parameters for PCell is given in Table 7.6.13.2.4.1-3 and Table 7.6.13.2.5-1, respectively. The test consists of two sub-tests with different TRS BW.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.13.2.5-1 as appropriate.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.13.2.5-1. T2 starts.

6. The UE shall transmit periodically MeasurementReport messages.

7. After 10s wait from Step 3, the SS shall check the *result-k5-r17* reported values in the periodic MeasurementReport. The result-k5 value is outside the limits in Table 7.6.13.0.2-1 or the UE fails to report the measurement value for serving cell, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

8. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

7.6.13.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table 4.6.3-76B in 38.508-1 [14] with condition CSI-RS_REF

7.6.13.2.5 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in 7.6.13.0.2

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.39.3.

The reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified [in clause 10.1.25.3.1, for k=5].

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

Table 7.6.13.2.4.1-3 and Table 7.6.13.2.5-1 define the primary level settings including test tolerances for UE Rx-Tx time difference measurement with TRS for RTT-based PDC in FR2 SA.

Table A.7.6.13.2.5-1: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
AoA setup		1	Setup 1 as specified in clause A.9.1	
Beam Assumption Note 7		1	Rough	
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS Configuration		1	TRS.2.1 TDD	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
SRS configuration		1	PDC-SRS.3	
N_{oc} Note 2	dBm/SCS	1	-89 + TT	
N_{oc} Note 2	dBm/15 kHz	1	-98 + TT	

TRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41 + TT
TRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2 + TT
TRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-91 + TT
Io	dBm/95.04 MHz	1	N/A	-57.63 + TT
Propagation Condition		1	AWGN	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: TRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: TRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in TS 38.133 B.2.1.3, and does not limit UE implementation or test system implementation

Table 7.6.13.2.5-2: SRS Configuration for FR2 Propagation Delay Compensation

	PDC-SRS.3	
Field		**Comment**
c-SRS	Same as NRB,c in the test case	
b-SRS	0	
b-hop	0	Frequency hopping is disabled
groupOrSequenceHopping	neither	No group or sequence hopping
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
pathlossReferenceRS ssb-Index	0	SSB #0 is used for SRS path loss estimation
usage	usagePDC-r17	
startPosition	5	resourceMapping setting
nrofSymbols	4	
repetitionFactor	n1	without repetition.
transmissionComb	n4	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
resourceType	Periodic	
periodicityAndOffset-p	Sl1280, 160	SRS transmission periodicity

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.14 SA event triggered reporting tests with Pre-MG

7.6.14.0 Minimum conformance requirements

7.6.14.0.1 Minimum conformance requirements for event-triggered measurement with gap

[TS 38.133 [6], clause 9.2.6.2, 9.2.6.3]

When a measurement gap is provided or an activated Pre-MG is provided without any pre-MG status changed during the measurement period, the UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index.}$ The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2 with SCS smaller or equal to 480 kHz.

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 7.6.14.0.1-1

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 7.6.14.0.1-2

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in TS38.133[6] clause 9.1.5.2 for measurement conducted within measurement gaps.

K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. K_{gap} = 1 when the UE is not configured with concurrent measurement gaps or not supporting [concurrent measurement gaps]. Otherwise, $K_{gap} = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

For a window W of duration max(SMTC period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap and per-FR measurement gap within the same FR as the SSB frequency layer, and starting from the beginning of any SMTC occasion:

-- N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W, including those overlapped with other measurement gap occasions within the window, and

$N_{available}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W after accounting for measurement gap collisions by applying the measurement gap collision rule in TS38.133[6] section 9.1.8.3.

When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{available}$ =0.

$M_{pss/sss_sync_with_gaps}$: For a UE supporting FR2-1 power class 1 or 5, $M_{pss/sss_sync\ with_gaps}$=40. For a UE supporting FR2-1 power class 2, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2-1 power class 3, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2-1 power class 4, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync\ with_gaps}$ = 60. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync\ with_gaps}$ = 36. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync\ with_gaps}$ = 36.

$M_{meas_period_with_gaps}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_with_gaps}$ =40. For a UE supporting FR2-1 power class 2, $M_{meas_period_with_gaps}$ =24. For a UE supporting FR2-1 power class 3, $M_{meas_period_with_gaps}$ =24. For a UE supporting FR2-1 power class 4, $M_{meas_period\ with_gaps}$ =24. For a UE supporting FR2-2 power class 1, $M_{meas_period_with_gaps}$ = 60. For a UE supporting FR2-2 power class 2, $M_{meas_period_with_gaps}$ = 36. For a UE supporting FR2-2 power class 3, $M_{meas_period_with_gaps}$ = 36.

The UE shall be able to identify a new detectable intra-frequency cell within the time period specified in TS 38.133 [6].

For a UE that supports Pre-MG, an SMTC occasion is only considered to be overlapped by Pre-MG if the Pre-MG is activated

The normative reference for this Intra-frequency measurements with measurement gaps requirement is in TS 38.133 [6] clauses 9.2.2, 9.2.4.3 and 9.2.6.

Table 7.6.14.0.1-1: Time period for PSS/SSS detection (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, $M_{pss/sss_sync_with_gaps}$ x K_{FR} x K_{gap} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x $M_{pss/sss_sync_with_gaps}$ x K_{FR} x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil($M_{pss/sss_sync_with_gaps}$ x K_{FR} x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer. NOTE 2: K_{FR} is a scaling factor depending on the frequency range and the SSB SCS. For FR2-1, KFR = 1. For FR2-2: KFR = 1 if the SCS of the SSB of the cell being detected is 120 kHz, KFR = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and KFR = 3 if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 7.6.14.0.1-2: Measurement period for intra-frequency measurements with gaps(FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, ceil($M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x $M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) Note 1 x $CSSF_{intra}$
DRX cycle>320ms	Ceil($M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	

[TS 38.133 [6], clause 9.2.2]

The requirements in TS 38.133 [6] clause 9.2 apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] clauses 10.1.2 and 10.1.3 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in TS 38.133 [6] clauses 10.1.7 and 10.1.8 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in TS 38.133 [6] clauses 10.1.12 and 10.1.13 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.2 for a corresponding Band.

[TS 38.133 [6], clause 9.2.4.3]

Reported RSRP, RSRQ, and RS-SINR measurements contained in event triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify\ intra\ without\ index}$ defined in TS 38.133 [6] clause 9.2.5.1 or clause 9.2.6.2. When L3 filtering is used an additional

delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ as defined in TS 38.133 [6] clause 9.2.5.1 or clause 9.2.6.2. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index}$ or $T_{identify\ intra\ with\ index}$ defined in TS 38.133 [6] clause 9.2.5.1 or clause 9.2.6.2 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

7.6.14.1 NR SA FR2 event triggered reporting tests with pre-configured measurement gaps and autonomous activation/deactivation

- Editor's Note: This test case has been completed for the following configurations:
- Test frequency f ≤ 40.8 GHz
- UE PC3
- This test case is incomplete for UE power classes other than PC3
- This test case is incomplete for test frequencies > 40.8 GHz

7.6.14.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event with autonomous activation/deactivation of Pre-MG. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 [6] clause 9.2.5.1 and 9.2.5.2.

7.6.14.1.2 Test applicability

This test applies to all types of NR UEs supporting 5GS NR SA FR2, BWP adaptation of at least 2 BWPs, BWP operation without bandwidth restriction, DCI and timer-based active BWP switching delay Type1 or Type2, CSI-RS-based RLM *and preconfiguredUE-AutonomousMeasGap-r17* capability from release 17 onwards.

7.6.14.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.14.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.14 .1.

7.6.14.1.4 Test description

7.6.14.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.14.1.4.1-1

Table 7.6.14.1.4.1-1: Supported test configurations

Config	Description
7.6.14.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Test environment parameters are given in Table 7.6.14.1.4.1-2.

Table 7.6.14.1.4.1-2: Initial conditions for SA event triggered reporting tests with Pre-MG

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.

Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.14.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 7.6.14.1.4.1-3.

2. Message contents are defined in clause 7.6.14.1.4.3.

3. The AoA setup for this test is Setup 3 as defined in clause A.3.15.3. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

Table 7.6.14.1.4.1-3: General test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Value	Comment
Active cell		PCell (Cell 1)	
Neighbour cell		Cell 2	Cell to be identified.
RF Channel Number		1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		SMTC.1	
A4-Thresholds	dBm/SCS	-120	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
Gap Pattern Id		13	
Measurement gap offset	ms	39	
Time offset between Cell 1 and Cell 2		3 μs	Synchronous cells
T1	s	0.1	
T2	s	0.2	
T3	s	5	

7.6.14.1.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

There are two different UE-specific BWPs configured in Cell 1, BWP-1 which contains the cell defining SSB, and BWP-2 which does not contain any SSB of Cell 1.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

Two cells are deployed in the test, which are FR2 PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A4 is used.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 7.6.14.1.4.1-3, 7.6.14.1.5-1, and 7.6.14.1.5-2. Propagation conditions are set according to Annex C clauses C.2.2.

3. SS shall transmit an *RRCReconfiguration* message which include with Measurement configuration and 2 different UE-specific bandwidth parts for Cell 1 (PCell), BWP-1 and BWP-2.

- UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in PCell.

- Pre-MG status is assumed to be 'deactivated' when the BWP is active.

- BWP-1 includes bandwidth of the initial DL BWP and SSB.

- BWP-2 does not include bandwidth of the initial DL BWP and SSB.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE would have ACK/NACK sending for those PDSCHs scheduled in the slots overlapped with the pre-MG occasions in T1.

6. When T1 expires, at the start of time duration T2, the serving gNB trigger Pre-MG activation starts via the DCI format 1_1 command for PCell DL BWP switch, is received at the UE side in PCell's slot # denoted i. The UE shall switch its bandwidth part from BWP-1 to BWP-2. And UE is expected to complete the Pre-MG activation within the beginning of PCell's DL slot (i+TBWPswitchDelay) + 5ms in T2 as defined in TS 38.133 [6] clause 8.6.2 and clause 8.19.2.

7. At the start of time duration T3, the SS shall switch the power setting from T2 to T3 as specified in Table 7.6.14.1.5-2.

8. The UE shall NOT be able to receive PDSCH and report corresponding ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

9. The UE shall transmit a *MeasurementReport* message triggered by Event A4. With the overall delays measured from the beginning of time period T3 is less than 3.20 ms for UE supporting power class 1,5, 1.92 ms for UE supporting power class 2, 3, and 4.

10. After the SS receive the *MeasurementReport* message in step 9 or when T3 expires, the SS shall:

    - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

11. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

12. Depending on the choice in Step 10, the SS:
    - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
    Or
    - if the device has been switched off, switcheson the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.14.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.14.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions GAP NEEDED Table H.3.1-4AA with A4-offset = -120dB Table H.3.1-5 Table H.3.1-6 with conditions Pattern #13, MGe and Pre-CFG Table H.3.1-8 with Condition CSI-RS RLM

Table 7.6.14.1.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	entry 1 BWP-1	
BWP-Downlink[2]	BWP-Downlink with condition BWP-Id2	entry 2 BWP-2	
}			
firstActiveDownlinkBWP-Id	1	BWP-1	
defaultDownlinkBWP-Id	0	Initial BWP	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	entry 1 BWP-1	
BWP-Uplink[2]	BWP-Uplink with condition BWP-Id2	entry 2 BWP-2	
}			
firstActiveUplinkBWP-Id	1	BWP-1	
}			
}			

Table 7.6.14.1.4.3-3: *BWP-Downlink*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		BWP-Id1
	2		BWP-Id2
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.6		BWP-Id1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.5		BWP-Id2
}			
}			
}			

Table 7.6.14.1.4.3-4: *BWP-Uplink*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		BWP-Id1
	2		BWP-Id2
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			

locationAndBandwidth	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.6		BWP-Id1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.5		BWP-Id2
}			
}			
}			

Table 7.6.14.1.4.3-5: *PDSCH-TimeDomainResourceAllocationList*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	3 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	$T_{BWPswitchDelay}$	Defined in TS 38.133 [6], Table 8.6.2-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	S=2, L=12	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	S=2, L=12	
}			
}			

Table 7.6.14.1.4.3-6: *MeasObjectNR*

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO, Synchronous cells, NOT SS-SINR and MGe			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
cellsToAddModList SEQUENCE (SIZE (1..maxNrofCellMeas)) OF CellsToAddMod {	1 entry		
CellsToAddMod[1] SEQUENCE {		entry 1	
physCellId	PhysCellId of Cell 2		
cellIndividualOffset SEQUENCE {			
rsrpOffsetSSB	dB16		
rsrqOffsetSSB	Not present		
sinrOffsetSSB	Not present		
rsrpOffsetCSI-RS	Not present		
rsrqOffsetCSI-RS	Not present		
sinrOffsetCSI-RS	Not present		
}			

}			
}			
}			

7.6.14.1.5 Test requirements

Table 7.6.14.1.4.1-3, 7.6.14.1.5-1, and Table 7.6.14.1.5-2 defines the primary level settings for all tests.

Table 7.6.14.1.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		24			24		
Initial BWP configuration		DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1		
BWP-1 Configuration		DLBWP.1.6 ULBWP.1.6			N/A		
BWP-2 Configuration		DLBWP.1.5 ULBWP.1.5			N/A		
RLM-RS		CSI-RS			N/A		
PDSCH RMC configuration		SR.3.2 TDD			N/A		
RMSI CORESET RMC configuration		CR.3.1 TDD			N/A		
Dedicated CORESET RMC configuration		CCR.3.1 TDD			N/A		
TRS configuration		TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI states		TCI.State.2			N/A		
PDSCH/PDCCH subcarrier spacing	kHz	120			120		
OCNG Patterns		OP.5			N/A		
cellIndividualOffset	dB	N/A			16		
SSB		SSB.3 FR2			SSB.7 FR2		
Propagation Condition		No external noise (Note 1)			No external noise (Note 1)		
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]							

Table 7.6.14.1.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.3.15.3					
		AoA1			AoA2		
Beam assumption Note 3		Rough			Rough		
E_s	dBm/SCS	-89	-89	-89	-infinity	-Infinity	-89
$\hat{E}_s / I_{ot}$ BB Note 4	dB	-0.12	-0.12	-0.12	-Infinity	-Infinity	-0.12
SSB_RP	dBm/SCS	-89	-89	-89	-infinity	-Infinity	-89
Io	dBm/95.04MHz	-64.41	-64.41	-64.41	-Infinity	-Infinity	-64.41
Time multiplexing of the downlink transmissions from each AoA		Defined in Figure 7.6.1.1.1-1					

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 4:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

During T1, the UE shall be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

During T2 and T3, the UE shall not report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions, starting from the 1st complete Pre-MG occasion after the beginning of PCell's DL slot ($i+T_{BWPswitchDelay}$) + 5ms as defined in TS 38.133 [6] clause 8.19.2.

The UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than Y ms from the beginning of time period T3, where Y is

- 3.2s for a UE supporting power class 1 and 5,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.14.2 NR SA FR2 event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for UE power classes other than PC3

This test case is incomplete for test frequencies > 40.8 GHz

7.6.14.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event with network-controlled activation/deactivation of Pre-MG. This test will partly verify the TDD intra-frequency cell search requirements in 38.133 [6] clause 9.2.6.2 and 9.2.6.3.

7.6.14.2.2 Test applicability

This test applies to all types of NR UEs supporting 5GS NR SA FR1, BWP adaptation of at least 2 BWPs, BWP operation without bandwidth restriction, DCI and timer-based active BWP switching delay Type1 or Type2, CSI-RS-based RLM *and* *preconfiguredNW-ControlledMeasGap-r17* capability from release 17 onwards.

7.6.14.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.14.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.14.2.

7.6.14.2.4 Test description

7.6.14.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.14.2.4-1.

Table 7.6.14.2.4.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Test environment parameters are given in Table 7.6.14.2.4.1-2.

Table 7.6.14.2.4.1-2: Initial conditions for SA event triggered reporting tests with Pre-MG

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.14.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 7.6.14.2.4.1-3.

2. Message contents are defined in clause 7.6.14.2.4.3.

3. There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

4. The AoA setup for this test is Setup 3 as defined in clause A.3.15.3. The UE RX Beam Peak direction has been obtained previously using one of the search procedures as described in Annex I.

Table 7.6.14.2.4.1-3: General test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Value	Comment
Active cell		PCell (Cell 1)	
Neighbour cell		Cell 2	Cell to be identified.
RF Channel Number		1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		SMTC.1	
A3-Offset	dB	-11	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
Gap Pattern Id		13	
Measurement gap offset	ms	39	
Time offset between Cell 1 and Cell 2		3 μs	Synchronous cells
T1	s	0.1	
T2	s	0.2	
T3	s	5	

7.6.14.2.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2 and T3, respectively.

There are two BWPs configured in Cell 1, BWP-1 which contains the cell defining SSB, and BWP-2 which does not contain any SSB of Cell 1.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1.

Two cells are deployed in the test, which are FR2 PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. A pre-MG is configured before the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.14.2.4.1-3 and Table 7.6.14.2.5-1 and Table 7.6.14.2.5-2. Propagation conditions are set according to Annex C clauses C.2.2.

3. SS shall transmit an *RRCReconfiguration* message which include with Measurement configuration and 2 different UE-specific bandwidth parts for Cell 1 (PCell), BWP-1 and BWP-2.

   - UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in PCell.

   - Pre-MG status is assumed to be ‘deactivated’ when the BWP is active.

   - BWP-1 includes bandwidth of the initial DL BWP and SSB with preConfGapStatus for BWP-1 is set to ‘0’ as ‘deactivated’.

   - BWP-2 does not include bandwidth of the initial DL BWP and SSB with preConfGapStatus for BWP-2 is set to ‘1’ as ‘activated’.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE would have ACK/NACK sending for those PDSCHs scheduled in the slots overlapped with the pre-MG occasions in T1.

6. When T1 expires, at the start of time duration T2, the serving gNB trigger Pre-MG activation starts via the DCI format 1-1 command for PCell DL BWP switch, is received at the UE side in PCell’s slot # denoted i. The UE shall switch its bandwidth part from BWP-1 to BWP-2. And UE is expected to complete the Pre-MG activation within the beginning of PCell’s DL slot (i+TBWPswitchDelay) + 5ms in T2 as defined in TS 38.133 [6] clause 8.6.2 and clause 8.19.2.

7. The UE shall NOT be able to receive PDSCH and report corresponding ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

8. At the start of time duration T3, the SS shall switch the power setting from T2 to T3 as specified in Table 7.6.14.2.5-2., the serving gNB trigger Pre-MG deactivation via the DCI format 1-1 command for PCell DL BWP switch, is received at the UE side in PCell’s slot # denoted i. The UE shall switch its bandwidth part from BWP-2 to BWP-1. And UE is expected to complete the Pre-MG dectivation within the beginning of PCell’s DL slot (i+TBWPswitchDelay) + 5ms in T2 as defined in TS 38.133 [6] clause 8.6.2 and clause 8.19.2.

9. The UE shall be able to receive PDSCH and report corresponding ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

10. The UE shall transmit a *MeasurementReport* message triggered by Event A3. With the overall delays measured from the beginning of time period T3 is less than 962 ms.

11. After the SS receive the *MeasurementReport* message in step 10 or when T3 expires, the SS shall:

    - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

- switch the UE off.

12. Set NR Cell 2 physical cell identity = ((current NR cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

13. Depending on the choice in Step 11, the SS:
- if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
Or
- if the device has been switched off, switcheson the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

14. Repeat step 2-13 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.14.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.14.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions GAP NEEDED Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-6 with conditions Pattern #13, MGe and Pre-CFG Table H.3.1-7 with condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM

Table 7.6.14.2.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	entry 1 BWP-1	
BWP-Downlink[2]	BWP-Downlink with condition BWP-Id2	entry 2 BWP-2	
}			
firstActiveDownlinkBWP-Id	1	BWP-1	
defaultDownlinkBWP-Id	0	Initial BWP	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	entry 1 BWP-1	
BWP-Uplink[2]	BWP-Uplink with condition BWP-Id2	entry 2 BWP-2	
}			
firstActiveUplinkBWP-Id	1	BWP1	
}			
}			

Table 7.6.14.2.4.3-3: *BWP-DownlinkDedicated*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-11			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-DownlinkDedicated ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1] {	BWP-1	DLBWP.1.6 configuration	
EXTENSION {			
preConfGapStatus-r17	00000000		
}			
}			
BWP-Downlink[2] {	BWP-2	DLBWP.1.5 configuration	
EXTENSION {			
preConfGapStatus-r17	10000000		
}			
}			
}			
}			

7.6.14.2.5 Test requirement

Table 7.6.14.2.4.1-3, 7.6.14.2.5-1, and Table 7.6.14.2.5-2 defines the primary level settings including test tolerances for all tests.

Table 7.6.14.2.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	**Unit**	**Cell 1**			**Cell 2**		
		T1	**T2**	**T3**	**T1**	**T2**	**T3**
TDD configuration		TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		24			24		
Initial BWP configuration		DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1		
BWP-1 Configuration		DLBWP.1.6 ULBWP.1.6			N/A		
BWP-2 Configuration		DLBWP.1.5 ULBWP.1.5			N/A		
RLM-RS		CSI-RS			N/A		
PDSCH RMC configuration		SR.3.2 TDD			N/A		
RMSI CORESET RMC configuration		CR.3.1 TDD			N/A		
Dedicated CORESET RMC configuration		CCR.3.1 TDD			N/A		
TRS configuration		TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI states		TCI.State.2			N/A		
PDSCH/PDCCH subcarrier spacing	kHz	120			120		
OCNG Patterns		OP.5			N/A		
cellIndividualOffset	dB	N/A			16		
SSB		SSB.3 FR2			SSB.7 FR2		
Propagation Condition		No external noise (Note 1)			No external noise (Note 1)		
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]							

Table.7.6.14.2.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	**Unit**	**Cell 1**	**Cell 2**

		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.3.15.3					
		AoA1			AoA2		
Beam assumption Note 3		Rough			Rough		
E_s	dBm/SCS	-89	-89	-89	-infinity	-infinity	-89
$\hat{E}_s / I_{ot}$ BB Note 4	dB	-0.12	-0.12	-0.12	-Infinity	-Infinity	-0.12
SSB_RP	dBm/SCS	-89	-89	-89	-infinity	-infinity	-89
Io	dBm/95.04MHz	-64.41	-64.41	-64.41	-Infinity	-Infinity	-64.41
Time multiplexing of the downlink transmissions from each AoA		Defined in Figure A.7.6.1.1.1-1					

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

During T1,

The UE shall report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions. (BWP-1)

During T2,

The UE is expected to complete the Pre-MG activation within the beginning of PCell's DL slot (i+TBWPswitchDelay) + 5ms in T2 as defined in TS 38.133 [6] clause 8.6.2 and clause 8.19.2. (BWP-1 -> BWP-2)

During T3,

The UE is expected to complete the Pre-MG deactivation within the beginning of PCell's DL slot (i+TBWPswitchDelay) + 5ms in T3 as defined in TS 38.133 [6] clause 8.6.2 and clause 8.19.2. (BWP-2 -> BWP-1)

The UE shall be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions after BWP switch complete.

The UE shall send one Event A3 triggered measurement report, with an overall measurement reporting delay less than X ms from the beginning of time period T3, where X is

- 1.6s for a UE supporting power class 1 and 5,
- 0.96s for a UE supporting power class 2, 3 and 4

The overall delays measured test requirement is expressed as:

Overall delays measured = measurement reporting delay + TTI insertion uncertainty

Measurement reporting delay = $T_{identify_intra_without_index}$

$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}$

T_{PSS/SSS_sync_intra} = 960 ms

$T_{SSB_measurement_period_intra}$ = 960 ms

TTI insertion uncertainty = 2 ms

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

Note: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.15 SA event triggered reporting tests with concurrent gaps

7.6.15.0 Minimum conformance requirements

7.6.15.0.1 Minimum conformance requirements for Intra-frequency measurement

The UE shall be able to identify a new detectable intra-frequency cell within the time period specified in TS 38.133 [6].

Intra-frequency measurements without measurement gaps:

When UE supports concurrentMeasGap-r17 and is configured with concurrent measurement gaps,

For FR2, $K_{layer1_measurement}$ is scaling factor for sharing between L3 and L1 measurement.

$K_{layer1_measurement}$=1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged. and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

The normative reference for this requirement is TS 38.133 [6] clauses 9.2.2, 9.2.4.3, 9.2.5 and 9.2.6.

7.6.15.0.2 Minimum conformance requirements for Inter-frequency measurement

The UE shall be able to identify a new detectable inter-frequency cell within the time period specified in TS 38.133 [6].

Inter-frequency measurements without measurement gaps:

When UE supports concurrentMeasGap-r17 and is configured with concurrent measurement gaps,

For FR2, $K_{layer1_measurement}$ is scaling factor for sharing between L3 and L1 measurement.

$K_{layer1_measurement}$=1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by inter-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by inter-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by *SSB-ToMeasure* and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

The normative reference for this requirement is TS 38.133 [6] clause 9.3.2, 9.3.4, 9.3.5, 9.3.6.3, 9.3.9.

7.6.15.0.3 Minimum conformance requirements for PRS measurement

When physical layer receives last of *NR-TDOA-ProvideAssistanceData* message and *NR-TDOA-RequestLocationInformation* message from LMF via LPP [37], the UE shall be able to measure multiple (up to the UE capability specified in TS 38.133 [6] clause 9.9.3.3) PRS-RSRP measurements, defined in TS 38.215 [10].

During the measurement period defined in TS 38.133 [6] clause 9.9.3.5, $K_{p,PRS,i}$ is a scaling factor for a positioning frequency layer to be measured within the associated measurement gap pattern, which is defined as $K_{p,PRS,i} = N_{total} / N_{available}$ for UE configured with concurrent measurement gap, and $K_{p,PRS,i} = 1$ for UE not configured with concurrent measurement gap.

- For a window W of duration max($T_{PRS,i}$, MGRP_max), where $T_{PRS,i}$ is the maximum PRS resource periodicity among all PRS resources in positioning frequency layer i , and where MGRP_max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the positioining frequency layer, and starting at the beginning of any associated gap occasions covering the PRS occasion:
  - N_{total} is the total number of associated gap occasions covering PRS occasions within the window, including both dropped and non-dropped instances of the associated measurement gap within the window, and
  - $N_{available}$ is the number of non-dropped associated gap occasions covering PRS occasions within the window W, after further accounting for MG collisions by applying the selected gap collision rule
  - Requirements do not apply if $N_{available}$ =0.

The normative reference for this requirement is TS 38.133 [6] clause 9.9.3.

7.6.15.1 NR SA FR2 event triggered reporting tests with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for UE power classes other than PC3

This test case is incomplete for test frequencies > 40.8 GHz

7.6.15.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements. This test will partly verify the SA inter-frequency NR cell search requirements in TS 38.133 [6] clause 9.3.4.

7.6.15.1.2 Test applicability

his test applies to all types of NR UEs supporting concurrent gap capability from release 17 onwards.

7.6.15.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.15.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.15 .1.

7.6.15.1.4 Test description

7.6.15.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.15.1.4.1-1

Table 7.6.15.1.4.1-1: Supported test configurations

Config	Description
7.6.15.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Test environment parameters are given in Table 7.6.15.1.4.1-2.

Table 7.6.15.1.4.1-2: Initial conditions for SA inter-frequency event triggered reporting for FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.14.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 7.6.15.1.4.1-3.
2. Message contents are defined in clause 7.6.15.1.4.3.
3. There are three NR carriers and three cells specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 7.6.15.1.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2, 3	Three FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2 and 3	NR cell 2 is on NR RF channel number 2. NR cell 3 is on NR RF channel number 3.
Gap Pattern Id		Config 1	14 for both gaps	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	79 for MG#1 19 for MG#2	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 and 3 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Cell 2 and 3 are synchronous cells to cell 1.
T1	s	Config 1	5	
T2	s	Config 1	10.4 for PC1; 6.5 for other PC	

7.6.15.1.4.2 Test procedure

In this test, there are three cells: NR cell 1 as PCell in FR2 on NR RF channel 1, NR cell 2 as neighbour cell in FR2 on NR RF channel 2, and NR cell 3 as neighbour cell in FR2 on NR RF channel 3. The test parameters and configurations are given in Tables 7.6.15.1.4.1-1, 7.6.15.1.4.1-2, and 7.6.15.1.5-1.

Two measurement gaps with pattern configuration # 14 as defined in Table 7.6.15.1.4-3 are provided for UE. The measurement object for NR RF channel 2 is associated with MG#1, and measurement object for NR RF channel 3 is associated with MG#2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 or NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.15.1.5-1.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.15.1.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If Cell 2 and Cell 3's overall delays measured from the beginning of time period T2 is less than 10240 ms for UE supporting power class 1 and 6400 ms for UE supporting other power class, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements, then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop. And set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.15.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.15.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ and GAP NEEDED Table H.3.1-4 with A3-offset = -11dB Table H.3.1-5
Specific message contents exceptions for Cell 2	Table H.3.1-3 with conditions INTER-FREQ MO, MGe and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Cell 3	Table H.3.1-3 with conditions INTER-FREQ MO, MGe and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.6.15.1.4.3-2: MeasObjectNR-DEFAULT: EN-DC FR2-FR2 measurement object configuration

Derivation Path: Table H.3.1-3 with condition INTER-FREQ MO			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB16		
}			

Table 7.6.15.1.4.3-3: *MeasGapConfig*

Derivation Path: Table H.3.1-6 with condition MGe			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 SEQUENCE{	2 entries		
GapConfig-r17[1] SEQUENCE{		entry 1	
measGapId-r17	1		
gapType-r17	perUE		
gapOffset-r17	79		
mgl-r17	ms5dot5		
mgrp-r17	ms80		
mgta-r17	ms0		
}			
GapConfig-r17[2] SEQUENCE{		entry 2	
measGapId-r17	2		
gapType-r17	perUE		
gapOffset-r17	19		
mgl-r17	ms5dot5		
mgrp-r17	ms80		
mgta-r17	ms0		
}			
}			
}			

Table 7.6.15.1.4.3-4: *MeasIdToAddModList*

Derivation path: Table H.3.1-2 with condition INTER-FREQ			
Information Element	**Value/Remark**	**Comment**	**Condition**
MeasIdToAddModList::= SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	2 entries		
MeasIdToAddMod[1] SEQUENCE {		entry 1	
measId	1		
measObjectId	2	NR Cell 2 measurement object	

reportConfigId	1		
}			
MeasIdToAddMod[1] SEQUENCE {		entry 2	
measId	2		
measObjectId	3	NR Cell 3 measurement object	
reportConfigId	1		
}			
}			

7.6.15.1.5 Test requirements

Table 7.6.15.1.4.1-3, 7.6.15.1.5-1 defines the primary level settings for all tests.

Table 7.6.15.1.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15					
				AoA1		AoA2		AoA2	
Beam Assumption[Note 4]			1,2	Rough		Rough		Rough	
NR RF Channel Number			Config 1	1		2		3	
Duplex mode			Config 1	TDD		TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A			
	Initial UL BWP			ULBWP.0.1		N/A			
	Dedicated DL BWP			DLBWP.1.1		N/A			
	Dedicated UL BWP			ULBWP.1.1		N/A			
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A		N/A	
EPRE ratio of PSS to SSS									
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									

EPRE ratio of PDCCH to PDCCH DMRS		Config 1	0		0		0	
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
$\hat{E}_s$	dBm/SCS	Config 1	-87	-87	-Infinity	-87	-Infinity	-87
SSBRP Note 2	dBm/SCS Note3	Config 1	-87	-87	-Infinity	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 5	dB	Config 1	1.89	1.89	-Infinity	1.89	-Infinity	1.89
Io Note 2	dBm/95.04 MHz Note3	Config 1	-58.01	-58.01	-Infinity	-58.01	-Infinity	-58.01
Propagation Condition		Config 1	No external noise (Note 6)					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 6: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]

The UE shall send one Event A3 triggered measurement report for each neighboring cell, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1, or

6400 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.15.2 NR SA FR2 event triggered reporting tests with concurrent measurement gaps without SSB time index detection when DRX is not used (PCell in FR2)

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for UE power classes other than PC3

This test case is incomplete for test frequencies > 40.8 GHz

7.6.15.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event for each neighbour cell. This test will partly verify the SA inter-frequency NR cell search requirements and collision handling between two partially overlapping gaps in TS 38.133 [6] clause 9.1.8.

7.6.15.2.2 Test applicability

This test applies to all types of NR UEs supporting concurrent gap capability from release 17 onwards.

7.6.15.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.15.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.15.2.

7.6.15.2.4 Test description

7.6.15.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.15.2.4.1-1.

Table 7.6.15.2.4.1-1: Supported test configurations

Config	Description
7.6.15.2-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Test environment parameters are given in Table 7.6.15.2.4.1-2.

Table 7.6.15.2.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.15.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.6.15.2.4.1-3.
2. Message contents are defined in clause 7.6.15.2.4.3.
3. There are three NR carriers and three cells specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 7.6.15.2.4.1-3: General test parameters for NR FR2 SA event triggered reporting tests with concurrent measurement gaps without SSB time index detection when DRX is not used (PCell in FR2)

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2, 3	Three FR2 NR carrier frequencies are used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
1st Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
2nd Neighbour cell		Config 1	NR cell 3	NR cell 3 is on NR RF channel number 3.
1st Gap Pattern Id		Config 1	13	As specified in TS 38.133 [6] clause 9.1.2-1.
2nd Gap Pattern Id		Config 1	14	As specified in TS 38.133 [6] clause 9.1.2-1.
1st gap offset		Config 1	39	

2nd gap offset		Config 1	4	
1st gap priority		Config 1	2	Second level priority
2nd gap priority		Config 1	1	Highest priority
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 and NR Cell 3 measurement objects
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	10.4 for PC1; 6.5 for other PC	

7.6.15.2.4.2 Test procedure

In this test, there are three cells: NR cell 1 as PCell in FR2 on NR RF channel 1, NR cell 2 as 1st neighbour cell in FR2 on NR RF channel 2, and NR cell 3 as 2nd neighbour cell in FR2 on NR RF channel 3. The test parameters are given in Tables 7.6.15.2.4.1-3 and Table 7.6.15.2.5-1 respectively.

Two measurement gaps are configured to UE with measurement gap pattern configuration #13 and #14 respectively. Measurement gap with pattern #13 is associated with inter-frequency measurement on NR cell 2, and measurement gap with pattern #14 is associated with inter-frequency measurement on NR cell 3. Measurement gap with pattern #14 is configured with a higher priority than measurement gap with pattern #13. Measurement gap with pattern #13 and #14 as defined in Table 7.6.15.2.4.1-3 are provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 or NR cell 3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.15.2.5-1.

3. SS shall transmit an RRCReconfiguration message to configure Event A3 triggered measurement report. Two concurrent per-UE measurement gap patterns are configured. Gap Pattern Id #14 for NR cell 3 is configured with a higher priority than Gap Pattern Id #13 for NR cell 2.

4. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.15.2.5-1. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event A3. If Cell 2 and Cell 3's overall delays measured from the beginning of time period T2 is less than 10240 ms for UE supporting power class 1 and 6400 ms for UE supporting other power class, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements, then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop. And set Cell 3 physical cell identity = ((current Cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),

   OR

   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.15.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.15.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1Table H.3.1-4 with A3-offset = -11dB Table H.3.1-5Table H.3.1-7 with condition INTER-FREQ
Specific message contents exceptions for Cell 2	Table 7.6.15.2.4.3-3 with conditions INTER-FREQ MO and MGe with MeasGapId-r17=13 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1
Specific message contents exceptions for Cell 3	Table 7.6.15.2.4.3-3 with conditions INTER-FREQ MO and MGe with MeasGapId-r17=14 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.7

Table 7.6.15.2.4.3-2: MeasConfig (Step3)

Derivation path: Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod SEQUENCE {	3 entries		
MeasObjectToAddMod[1] SEQUENCE {		Entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTRA-FREQ MO	NR Cell 1	
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		Entry 2	
measObjectId	2		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTER-FREQ MO	NR Cell 2	

}			
}			
MeasObjectToAddMod[3] SEQUENCE {		Entry 3	
measObjectId	3		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with condition INTER-FREQ MO	NR Cell 3	
}			
}			
}			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod SEQUENCE {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		Entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR-DEFAULT		
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod SEQUENCE {	2 entries		
MeasIdToAddMod[1] SEQUENCE {		Entry 1	
measId	1		
measObjectId	2	NR Cell 2	
reportConfigId	1		
}			
MeasIdToAddMod[2] SEQUENCE {		Entry 2	
measId	2		
measObjectId	3	NR Cell 3	
reportConfigId	1		
}			
}			
quantityConfig	QuantityConfig-DEFAULT		
measGapConfig	MeasGapConfig-Concurrent		
}			

Table 7.6.15.2.4.3-3: MeasObjectNR-DEFAULT: NR FR2-FR2 measurement object configuration

Derivation Path: Table H.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR of the SSB associated to serving cell	MO for Cell 1	
	ARFCN-ValueNR of the SSB associated to cell 2	MO for Cell 2	
	ARFCN-ValueNR of the SSB associated to cell 3	MO for Cell 3	
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
deriveSSB-IndexFromCell	true		
}			
}			
absThreshSS-BlocksConsolidation SEQUENCE {			
thresholdRSRP	0	SS-RSRP < -156dB	

}			
offsetMO SEQUENCE {			
rsrpOffsetSSB	dB0	MO for Cell 1	
	dB16	MO for Cell 2 and MO for Cell 3	
}			
associatedMeasGapSSB-r17	1	MO for Cell 2	
	2	MO for Cell 3	
}			

Table 7.6.15.2.4.3-4: MeasGapConfig-Concurrent

Derivation path: Table H.3.1-6 with condition MGe			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	2 entry		
GapConfig-r17[1] SEQUENCE {		Entry 1	
measGapId-r17	1	NR Cell 2	
gapType-r17	perUE		
gapOffset-r17	39		
mgl-r17	ms5dot5		
mgrp-r17	ms40		
mgta-r17	ms0		
gapPriority-r17	2		
}			
GapConfig-r17[2] SEQUENCE {		Entry 2	
measGapId-r17	2	NR Cell 3	
gapType-r17	perUE		
gapOffset-r17	4		
mgl-r17	ms5dot5		
mgrp-r17	ms80		
mgta-r17	ms0		
gapPriority-r17	1		
}			
}			
}			

7.6.15.2.5 Test requirement

Table 7.6.15.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.15.2.5-1: Cell specific test parameters for SA event triggered reporting tests with concurrent measurement gaps without SSB time index detection when DRX is not used (PCell in FR2)

Parameter		**Unit**	**Test configuration**	**Cell 1**		**Cell 2**		**Cell 3**	
				T1	**T2**	**T1**	**T2**	**T1**	**T2**
AoA setup			Config 1	Setup 3 as specified in TS 38.133 [6] clause A.3.15					
				AoA1		AoA2		AoA3	
Beam Assumption[Note 7]			1,2	Rough		Rough		Rough	
NR RF Channel Number			Config 1	1		2		3	
Duplex mode			Config 1	TDD		TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A		N/A	

	Initial UL BWP			ULBWP.0.1		N/A		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A		N/A	
OCNG Patterns defined in A.2.1-1 (OP.1)			Config 1	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-		-	
SMTC configuration defined in A.4-1			Config 1	SMTC.1		SMTC.1		SMTC.7	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS (Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
$\hat{E}_s$		dBm/SCS	Config 1	-87	-87	-Infinity	-87	-Infinity	-87
SSBRP Note 3		dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8		dB	Config 1	1.89	1.89	-Infinity	1.89	-Infinity	1.89
Io Note3		dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	No external noise (Note 9)				No external noise (Note 9)	

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18]

The UE shall send one Event A3 triggered measurement report for each neighbouring cell, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1, or

6400 for UE supporting other power class.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.15.3 NR SA FR2 event triggered reporting tests with concurrent measurement gaps with partially partial overlapping scenario for SSB-based measurements and PRS-based measurement

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for UE power classes other than PC3.

This test case is incomplete for test frequencies > 40.8 GHz.

7.6.15.3.1 Test purpose

The purpose of this test is to verify that the concurrent gap capable UE makes correct reporting of events. This test will partly verify the SA inter-frequency NR cell search requirements in TS 38.133 [6] clause 9.3.4 and PRS-RSRP measurement delay requirements specified in TS 38.133 [6] clause 9.9.3.5.

7.6.15.3.2 Test applicability

This test applies to all types of NR UEs supporting concurrent gap capability from release 17 onwards.

7.6.15.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.15.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.15.3.

7.6.15.3.4 Test description

7.6.15.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.15.3.4.1-1.

Table 7.6.15.3.4.1-1 Supported test configurations

Config	Description
7.6.15.3-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Test environment parameters are given in Table 7.6.15.3.4.1-2.

Table 7.6.15.3.4.1-2: Test environment parameters

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.	

Channel bandwidth	As specified by the test configuration selected from Table 7.6.15.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.6.15.3.4.1-3.
2. Message contents are defined in clause 7.6.15.3.4.3.
3. There are three NR carriers and three cells specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 7.6.15.3.4.1-3: General test parameters for NR SA FR2 event triggered reporting tests with concurrent gaps with partially partial overlapping scenario for SSB-based measurements and PRS-based measurement

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 3 2: Cell 2	Two TDD carrier frequencies are used for the NR cells
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data
Neighbour cell		Config 1	NR cell 2, NR cell 3	Cell 2 is an inter-frequency cell neighbor cell Cell 3 is a neighbour cell in the positioning assistance data
Gap Pattern Id		Config 1	0 for MeasGapId #0 1 for MeasGapId #1	As specified in TS 38.133 [6] clause 9.1.2-1
Measurement gap offset		Config 1	7 for MeasGapId #0 11 for MeasGapId #1	
A3-Offset	dB	Config 1	-12	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between cell 1 and neighbour cell 2		Config 1	3μs	Synchronous cells
Time offset between cell 1 and neighbour cell 3		Config 1	3μs	Synchronous cells
Expected RSTD between cell 1 and cell 3	μs	Config 1	3	
Expected RSTD uncertainty between cell 1 and cell 3	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	11	

7.6.15.3.4.2 Test procedure

In this test, there are three cells: NR cell 1 as PCell in FR2 on NR RF channel 1, NR cell 2 as inter neighbour cell in FR2 on NR RF channel 2, and NR cell 3 as intra neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables 7.6.15.3.4.1-3 and Table 7.6.15.3.5-1 respectively.

Two measurement gap patterns (MeasGapId #0 and MeasGapId #1) are configured with the gap pattern ID #0 and #1 as defined in Table 7.6.15.3.4.1-3. MeasGapId #1 is configured with a higher priority than MeasGapId #0. MeasGapId #0 and MeasGapId #1 are associated with the MOs for RF channel numbers #1 and #2 respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used for carrier 2. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3. Cell 1 and Cell 3 transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 [38] shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance of MeasGapId #1 containing the PRS resources that is ΔT after slot #n, where ΔT = 50 ms is the maximum processing time of the assistance data and location information request.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.15.3.5-1.

3. SS shall transmit an RRCReconfiguration message to configure Event A3 triggered measurement report. Two concurrent per-UE measurement gap patterns are configured. MeasGapId #1 for inter frequency measurement is configured with a higher priority than MeasGapId #0 for PRS measurement.

4. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.15.3.5-1. T2 starts.

6. UE shall transmit a MeasurementReport message triggered by Event A3. If Cell 2's overall delays measured from the beginning of time period T2 is less than 10240 ms for UE supporting power class 1 and 6400 ms for UE supporting other power class, and if the reported PRS RSRP measurement is within the PRS RSRP reporting range specified in TS 38.133 [6] clause 10.1.24.3, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements, then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop. And set Cell 3 physical cell identity = ((current Cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),

OR

- if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.15.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.15.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1Table H.3.1-2 with conditions INTER-FREQ and GAP NEEDED Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4
Specific message contents exceptions for Cell 2	Table H.3.1-3 with condition INTER-FREQ and MGe with MeasGapId-r17=1 Table H.3.1-7 with condition INTER-FREQ
Specific message contents exceptions for Cell 3	Table H.3.1-3 with condition INTRA-FREQ and MGe with MeasGapId-r17=0 Table H.3.1-7 with condition INTRA-FREQ

Table 7.6.15.3.4.3-2: MeasGapConfig (Step3)

Derivation path: Table H.3.1-6 with condition MGe and PRS			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	2 entry		
GapConfig-r17[1] SEQUENCE {		Entry 1	
measGapId-r17	0	NR Cell 1 and NR Cell 3	
gapType-r17	perUE		
gapOffset-r17	7		
mgl-r17	ms6		
mgrp-r17	ms40		
mgta-r17	ms0		
gapPriority-r17	2		
}			
GapConfig-r17[2] SEQUENCE {		Entry 2	
measGapId-r17	1	NR Cell 2	
gapType-r17	perUE		
gapOffset-r17	11		
mgl-r17	ms6		
mgrp-r17	ms80		
mgta-r17	ms0		
gapAssociationPRS-r17	true		
gapPriority-r17	1		
}			
}			
}			

7.6.15.3.5 Test requirement

Table 7.6.15.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.15.3.5-1: Cell specific test parameters for NR SA FR2 event triggered reporting tests with concurrent gaps with partially partial overlapping scenario for SSB-based measurements and PRS-based measurement

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in TS 38.133 [6] clause A.3.15					
Beam Assumption Note 7			Config 1	Rough		Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A			
	Initial UL BWP			ULBWP.0.1		N/A			
	Dedicated DL BWP			DLBWP.1.1		N/A			
	Dedicated UL BWP			ULBWP.1.1		N/A			
OCNG Patterns defined in A.2.1.1 (OP.1)			Config 1	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-		-	
TRS configuration			Config 1	TRS.2.1 TDD		-		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120		120	
SSB parameters			Config 1	SSB.1 FR2		SSB.1 FR2		SSB.1 FR2	
SMTC configuration defined in A.4-1			Config 1	SMTC.4		SMTC.4		SMTC.4	
PRS configuration			Config 1	PRS.1.1 FR2		N/A		PRS.1.2 FR2	
PRS muting configuration			Config 1	'10'		N/A		'01'	
EPRE ratio of PSS to SSS			Config 1	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS (Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		dBm/15 kHz Note5		-102		-104.7		-102	
N_{oc} Note2		dBm/SCS Note4	Config 1	-93		-95.7		-93	
SSB_RP Note 3		dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7	-Infinity	-87.3
SSB $\hat{E}_s / N_{oc}$		dB	Config 1	3.3	3.3	-Infinity	9.0	-Infinity	6.3
PRS-RSRP Note 3		dBm/SCS Note5	Config 1	-Infinity	-96	N/A	N/A	-Infinity	-102.8

PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-Infinity	-3	N/A	N/A	-Infinity	-9.8
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-Infinity	-3	N/A	N/A	-Infinity	-9.8
Io[Note3]	dBm/95.04 MHz Note5	Config 1	-59.05	-55.65	-66.7	-57.2	-59.05	-55.65
Propagation Condition		Config 1	AWGN					

Note 1: OCNG shall be used such that active cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Io values were derived for symbols without PRS.
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall send one Event A3 triggered measurement report Cell 2, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1, or

6400 for UE supporting other power class.

The PRS RSRP measurement time fulfils the requirements specified in TS 38.133 [6] clause 9.9.3.5. The UE shall perform and report the PRS RSRP measurements for Cell 3, with respect to the reference cell (Cell 1) in the DL-AoD assistance data, within the time duration specified in TS 38.133 [6] section 9.9.3.5 starting from the beginning of time interval T2. The reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in TS 38.133 [6] clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.16 SA event triggered reporting tests with NCSG

7.6.16.0 Minimum conformance requirements

7.6.16.0.1 Minimum conformance requirements for intra-frequency measurement

For the UE supporting NCSG, if NCSG is provided, the UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise, UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index.}$ The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 7.6.16.0.1-1 and 7.6.16.0.1-2 (deactivated Scell).

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 7.6.16.0.1-3 and 7.6.16.0.1-4 (deactivated Scell).

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to CSSFwithin_ncsg,i in TS 38.133 [6] clause 9.1.5.3 for measurement conducted within NCSG.

$M_{pss/sss_sync_with_gaps}$: For a UE supporting FR2 power class 1 or 5, $M_{pss/sss_sync\ with_gaps}$=40. For a UE supporting FR2 power class 2, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting power class 4, $M_{pss/sss_sync\ with_gaps}$ =24

$M_{meas_period_with_gaps}$: For a UE supporting power class 1 or 5, $M_{meas_period_with_gaps}$ =40. For a UE supporting power class 2, $M_{meas_period_with_gaps}$ =24. For a UE supporting power class 3, $M_{meas_period_with_gaps}$ =24. For a UE supporting power class 4, Mmeas_period with_gaps =24.

Table 7.6.16.0.1-1: Time period for PSS/SSS detection with NCSG (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, $M_{pss/sss_sync_with_gaps}$ x max(VIRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x $M_{pss/sss_sync_with_gaps}$) x max(VIRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	$M_{pss/sss_sync_with_gaps}$ x max(VIRP, DRX cycle) x $CSSF_{intra}$

Table 7.6.16.0.1-2: Time period for PSS/SSS detection with NCSG (deactivated SCell) (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	5 x max(measCycleSCell, VIRP) x $CSSF_{intra}$
DRX cycle≤ 320ms	5 x max(measCycleSCell, VIRP, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	5 x max(measCycleSCell, VIRP, DRX cycle) x $CSSF_{intra}$

Table 7.6.16.0.1-3: Measurement period for intra-frequency measurements with NCSG (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400ms, $M_{meas_period\ with_gaps}$ x max(VIRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x $M_{meas_period\ with_gaps}$) x max(VIRP, SMTC period, DRX cycle)) [Note 1] x $CSSF_{intra}$
DRX cycle>320ms	$M_{meas_period\ with_gaps}$ x max(VIRP, DRX cycle) x $CSSF_{intra}$

Table 7.6.16.0.1-4: Measurement period for intra-frequency measurements with NCSG (deactivated SCell) (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	5 x max(measCycleSCell, VIRP) x $CSSF_{intra}$
DRX cycle≤ 320ms	5 x max(measCycleSCell, VIRP, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	5 x max(measCycleSCell, VIRP, DRX cycle) x $CSSF_{intra}$

The requirements given above apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] sections 10.1.3 are fulfilled for a corresponding Band,
- SS-RSRQ related side conditions given in TS 38.133 [6] sections 10.1.8 are fulfilled for a corresponding Band,
- SS-SINR related side conditions given in TS 38.133 [6] sections 10.1.13 are fulfilled for a corresponding Band,

- SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.2 for a corresponding Band.

The RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clauses 10.1.3.1.1 and 10.1.3.1.2, the RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clauses 10.1.8.1.1, and the SINR measurement accuracy for all measured cells shall be as specified in the TS 38.133 [6] clause 10.1.13.1.1.

Reported RSRP, RSRQ and SINR measurements contained in event triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.1.3.1.1, 10.1.3.1.2, 10.1.8.1.1 and 10.1.13.1.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify_intra_without_index}$ defined in TS 38.133 [6] section 9.2.7.1. When L3 filtering is used an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clauses 9.2.2, 9.2.4.2, 9.2.7.1, and 9.2.7.2.

7.6.16.0.2 Minimum conformance requirements for inter-frequency measurement

For the UE supporting NCSG, if NCSG is provided, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured) or *deriveSSB-IndexFromCellInter-r17* is configured. Otherwise, UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$.

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter}) \text{ ms}$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 7.6.16.0.2-1.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 7.6.16.0.2-2.

M_{pss/sss_sync_inter}: For a UE supporting FR2 power class 1 or 5, M_{pss/sss_sync_inter} = 64 samples. For a UE supporting FR2 power class 2, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2 power class 3, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2 power class 4, M_{pss/sss_sync_inter} = 40 samples.

$M_{SSB_index_inter}$: For a UE supporting FR2 power class 1 or 5, $M_{SSB_index_inter}$ = 40 samples. For a UE supporting FR2 power class 2, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2 power class 3, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2 power class 4, $M_{SSB_index_inter}$ = 24 samples.

$M_{meas_period_inter}$: For a UE supporting FR2 power class 1 or 5, $M_{meas_period_inter}$ =64 samples. For a UE supporting FR2 power class 2, $M_{meas_period_inter}$=40 samples. For a UE supporting FR2 power class 3, $M_{meas_period_inter}$ =40 samples. For a UE supporting FR2 power class 4, $M_{meas_period_inter}$ = 40 samples.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_ncsg,i}$ in TS 38.133[6] clause 9.1.5.x for measurement conducted within NCSG.

Table 7.6.16.0.2-1: Time period for PSS/SSS detection with NCSG (FR2)

Condition NOTE1,2	T_{PSS/SSS_sync_inter}
No DRX	$\text{Max}(600\text{ms}, M_{pss/sss_sync_inter} \times \text{Max}(\text{VIRP}, \text{SMTC period})) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$\text{Max}(600\text{ms}, (1.5 \times M_{pss/sss_sync_inter}) \times \text{Max}(\text{VIRP}, \text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter}$
DRX cycle > 320ms	$M_{pss/sss_sync_inter} \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.

Table 7.6.16.0.2-2: Measurement period for inter-frequency measurements with NCSG (FR2)

Condition NOTE1,2	$T_{SSB_measurement_period_inter}$
No DRX	$\text{Max}(400\text{ms}, M_{meas_period_inter} \times \text{Max}(\text{VIRP}, \text{SMTC period})) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$\text{Max}(400\text{ms}, (1.5 \times M_{meas_period_inter}) \times \text{Max}(\text{VIRP}, \text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter}$
DRX cycle > 320ms	$M_{meas_period_inter} \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

When NCSG are provided for inter frequency measurements, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in TS 38.133 [6] clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 7.6.16.0.2-2.

For UE supporting *nr-NeedForGapNCSG-reporting-r17* and indicating *NeedForGapNCSG-InfoNR* for inter-frequency measurement,

- An inter-frequency SSB measurement is defined as measurement with NCSG if
  - the UE indicates 'ncsg' via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement, and
  - the SSB is not completely contained in the active BWP of the UE

  When network configures NCSG, the delay requirements are specified in TS 38.133 [6] clause 9.3.10.
- For inter-frequency SSB based measurements with NCSG, UE may cause scheduling restriction as specified in TS 38.133 [6] clause 9.3.10.3.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] clauses 10.1.4 and 10.1.5 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in TS 38.133 [6] clauses 10.1.9 and 10.1.10 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in TS 38.133 [6] clauses 10.1.14 and 10.1.15 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.3 for a corresponding Band.

The normative reference for this requirement is TS 38.133 [6] clause 9.3.2, 9.3.6.3, and 9.3.10.

7.6.16.0.3 Minimum conformance requirements for interruptions

It is up to UE implementation whether or not the UE is able to conduct transmission in the following slot(s),

- when *mgta* is not applied, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the last each of the interrupted slots after VIL1 and VIL2.

where UL slot denotes that all the symbols in the slot are uplink symbols, and L=1 if $(N_{\text{TA}} + N_{\text{TA offset}}) \times T_{\text{c}}$ for the UL transmission is less than the length of one slot; L=2 otherwise.

Note: Network is supposed to take into account the possible difference between the estimated TA at network and actual TA at UE when scheduling UE in the above slot(s).

The interruptions of NCSG in number of slots are listed in Table 7.6.16.0.3-1 on all serving cells when per-UE NCSG is configured or on FR1 serving cells when per-FR FR1 NCSG is configured to *ncsg-MeasGapPerFR-r17* capable UE.

There are two interruptions in each NCSG occasion, VIL1 before ML and VIL2 after ML, in NR standalone (with single carrier or NR CA). Each of them has number of interrupted slots captured in Table 7.6.16.0.3-1.

Table 7.6.16.0.3-1: Number of interrupted slots on FR2 serving cells for FR2 NCSG during each VIL in NR standalone operation (with single carrier, NR CA)

NR SCS (kHz)	Number of interrupted slots on serving cells	
	When MG timing advance of 0ms is applied	When MG timing advance of 0.75ms is applied
	VIL=0.75ms	VIL=0.75ms
60	3	3
120	6	6
NOTE 1: Void		

7.6.16.1 NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX

- Editor's Note: This test case has been completed for the following configurations:
- Test frequency f ≤ 40.8 GHz
- UE PC3
- This test case is incomplete for UE power classes other than PC3
- This test case is incomplete for test frequencies > 40.8 GHz

7.6.16.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 [6] clause 9.2.7.1 and 9.2.7.2, and also verify the scheduling availability during intra-frequency measurement with NCSG in TS 38.133 [6] clause 9.2.7.3.

7.6.16.1.2 Test applicability

This test applies to all types of NR UE from release 17 onwards supporting CSI-RS-based RLM, BWP operation without bandwidth restriction and NR NCSG capability. The UE is capable of NCSG and report '*ncsg*' through *NeedForGapNCSG-InfoNR* for PCell. Test 1 is applicable to UEs not supporting per-FR NCSG (ncsg-MeasGapPerFR-r17, as defined in TS 38.306 [11]) and Test 2 is applicable only to UEs supporting per-FR NCSG.

7.6.16.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.16.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.16 .1.

7.6.16.1.4 Test description

7.6.16.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.16.1.4.1-1

Table 7.6.16.1.4.1-1: Supported test configurations

Configuration	Description
7.6.16.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.6.16.1-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Test environment parameters are given in Table 7.6.16.1.4.1-2.

Table 7.6.16.1.4.1-2: Initial conditions for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE NCSG without DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.14.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 7.6.16.1.4.1-3.
2. Message contents are defined in clause 7.6.16.1.4.3.
3. Two cells are deployed in the test, which are FR1 PCell(Cell 1) and FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 7.6.16.1.4.1-3: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE NCSG without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
NCSG type		1, 2	Per-FR	
NCSG pattern		1, 2	13	
NCSG repitition periodicity	ms	1, 2	40	
ML	ms	1, 2	5	
NCSG offset	ms	1, 2	39	
SMTC configuration		1, 2	SMTC.1	
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

7.6.16.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The PCell shall continuously scheduled with data in the DL starting from T2 until the UE has sent the measurement report during T2. The test parameters are given in Table 7.6.16.1.4.1-3, 7.6.16.1.5-1, and 7.6.16.1.5-2 respectively.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 7.6.16.1.5-2.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.16.1.5-2. T2 start.

6. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

7. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 3.20 s for UE supporting power class 1, 1.92 s for UE supporting power class 2, 3, and 4, and DTX in PCell is not observed by the SS for the corresponding PDSCH scheduled in PCell in all the slots expect for the case where PDSCH or PUCCH is overlapped with VIL of NCSG pattern then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or DTX in PCell is observed by the SS except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern, then the number of failure tests is increased by one.

8. After the SS receive the *MeasurementReport* message in step 6 or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

9. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

10. Depending on the choice in Step 8, the SS:
    - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.16.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.16.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ Table H.3.1-4 with A3-offset = -11dB Table H.3.1-5 Table H.3.1-8 with Condition CSI-RS RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.6.16.1.4.3-2: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			

downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	1 entry		
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	entry 1	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	1 entry		
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	entry 1	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	
}			
}			

Table 7.6.16.1.4.3-3: MeasGapConfig(Step 3)

Derivation Path: Table H.3.1-6 with condition MGe and NCSG			
Information Element	**Value/remark**	**Comment**	**Condition**
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	1 entry		
GapConfig-r17[1] SEQUENCE {		entry 1	
measGapId-r17	1		
gapType-r17	perUE		Test1
	perFR2		Test2
gapOffset-r17	39		
mgl-r17	ms5		
mgrp-r17	ms40		
mgta-r17	ms0		
ncsgInd-r17	true		
}			
}			

Table 7.6.16.1.4.3-4: *BWP-Downlink*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.2		BWP-Id1
}			
}			
}			

Table 7.6.16.1.4.3-5: *BWP-Uplink*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.2		BWP-Id1
}			

}			
}			

Table 7.6.16.1.4.3-6: *MeasObjectNR*(Step 3)

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO, Synchronous cells, NOT SS-SINR and MGe			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
cellsToAddModList SEQUENCE (SIZE (1..maxNrofCellMeas)) OF CellsToAddMod {	1 entry		
CellsToAddMod[1] SEQUENCE {		entry 1	
physCellId	PhysCellId of Cell 2		
cellIndividualOffset SEQUENCE {			
rsrpOffsetSSB	dB16		
rsrqOffsetSSB	Not present		
sinrOffsetSSB	Not present		
rsrpOffsetCSI-RS	Not present		
rsrqOffsetCSI-RS	Not present		
sinrOffsetCSI-RS	Not present		
}			
}			
}			
}			

7.6.16.1.5 Test requirements

Table 7.6.16.1.4.1-3, 7.6.16.1.5-1, and Table 7.6.16.1.5-2 defines the primary level settings for all tests.

Table 7.6.16.1.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE NCSG without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.2 TDD		CR.3.2 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.7 TDD		CCR.3.7 TDD	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120		120	
OCNG Patterns		1, 2	OP.5		N/A	
cellIndividualOffset	dB	1~2	N/A		16	
SSB		1	SSB.3 FR2		SSB.7 FR2	
		2	SSB.4 FR2		SSB.8 FR2	

Propagation Condition		1, 2	AWGN	AWGN

Table 7.6.16.1.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE NCSG without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam Assumption Note 4		1,2	Rough		Rough	
E_s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
Io	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure 7.6.1.1.5-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Void
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

During T2, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.16.2 NR SA FR2 event triggered reporting tests on inter-frequency measurement with NCSG when DRX is not used (PCell in FR2)

- Editor's Note: This test case has been completed for the following configurations:
- Test frequency f ≤ 40.8 GHz
- UE PC3
- This test case is incomplete for UE power classes other than PC3
- This test case is incomplete for test frequencies > 40.8 GHz

7.6.16.2.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell identification and measurement period requirements in 38.133 [6] clauses 9.3.10.1 and 9.3.10.2, and also verify the scheduling availability during inter-frequency measurement with NCSG in 39.133 [6] clause 9.3.10.3.

7.6.16.2.2 Test applicability

This test applies to all types of NR UEs supporting NR NCSG capability from release 17 onwards. The serving frequency and the target frequency should be selected such that UE reports 'ncsg' for the target frequency given the serving frequency.

7.6.16.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.16.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.16.2.

7.6.16.2.4 Test description

7.6.16.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.16.2.4.1-1.

Table 7.6.16.2.4.1-1: Supported test configurations

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Test environment parameters are given in Table 7.6.16.2.4.1-2.

Table 7.6.16.2.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.14.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 7.6.16.2.4.1-3.

2. Message contents are defined in clause 7.6.16.2.4.3.

3. There are two NR cells on two carriers specified in the test. Cell 1 (NR cell 1) is the cell used for connection setup and Cell 2 is a target cell on a different carrier than Cell 1. The power levels and settings are according to Annex C.1.2 and C.1.3 for this test.

Table 7.6.16.2.4.1-3: General test parameters for SA inter-frequency event triggered reporting with NCSG for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.

Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
NCSG Pattern Id		Config 1	0	As specified in TS 38.133[6].clause 9.1.9.3-1.
NCSG offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5.2 for PC1 and PC5; 3.5 for other PC	

7.6.16.2.4.2 Test procedure

Two cells are deployed in the test: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell2 as neighbour cell in FR1 on NR RF channel 2. NR RF channel 1 and NR RF channel 2 should be selected such the UE reports 'ncsg' for the .target frequency on NR RF channel 2. The test parameters are given in Table 7.6.16.2.4.1-3 and Table 7.6.16.2.5-1 respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used for both frequency layers. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.16.2.5-1.

3. SS shall transmit an RRCReconfiguration message.

4. The UE shall transmit RRCReconfigurationComplete message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.16.2.5-1. T2 starts.

6. SS schedules on PCell continuously and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

7. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 5120ms for UE supporting power class 1 or 5, 3200ms for UE supporting power class 2, 3 and 4, and DTX in PCell is not observed by the SS for the corresponding PDSCH scheduled in PCell in all the slots expect for the case where PDSCH or PUCCH is overlapped with VIL of NCSG pattern, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or DTX in PCell is observed by the SS except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern, then the number of failure tests is increased by one.

8. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

- switch the UE off.

9. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

10. Depending on the choice in Step 8, the SS:
- if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
OR
- if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.16.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.16.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ Table H.3.1-4 with A3-offset = -11dB Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ

Table 7.6.16.2.4.3-2: MeasGapConfig(Step 3)

Derivation Path: Table H.3.1-6 with condition MGe and NCSG			
Information Element	**Value/remark**	**Comment**	**Condition**
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	1 entry		
GapConfig-r17[1] SEQUENCE {			
measGapId-r17	1		
gapType-r17	perUE		
gapOffset-r17	39		
mgl-r17	ms5		
mgrp-r17	ms40		
mgta-r17	ms0		
ncsgInd-r17	true		
}			

Table 7.6.16.2.4.3-3: MeasObjectNR for INTER-FREQ MO (Step 3)

Derivation Path: H.3.1-3 with Condition INTER-FREQ MO			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		

offsetMO ::= SEQUENCE {			
rsrpOffsetSSB	dB16		
}			
associatedMeasGapSSB-r17	1		
}			

7.6.16.2.5 Test requirement

Table 7.6.16.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 7.6.16.2.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting with NCSG for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.9.3			
				AoA1		AoA2	
Beam Assumption[Note 7]			1,2	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.2		OP.2	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							

N_{oc} Note2	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
$\hat{E}_s/N_{oc}$	dB	Config 1	8.7	8.7	-Infinity	9
SSB_RP Note 3	dBm/SCS Note5	Config 1	-87.0	-87.0	-Infinity	-86.7
$\hat{E}_s/I_{ot}$ BB Note 8	dB	Config 1	8.7	8.7	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1	-57.4	-57.4	-66.7	-57.2
Propagation Condition		Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in TS 38.133[6] clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1 and 5, or

3200 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall be scheduled on PCell continuously throughout the test. During the time duration T2, the interruption on PCell shall not be more than the values specified for SA in TS 38.133[6] clause 9.1.9.1.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE: For a UE that supports per-FR NCSG, it only needs to pass test case with per-FR NCSG, otherwise, it only needs to pass test case with per-UE NCSG.

7.6.16.3 NR SA FR2 event triggered reporting tests on deactivated SCell measurement via NCSG in non-DRX

- Editor's Note: This test case has been completed for the following configurations:
- Test frequency f ≤ 40.8 GHz
- UE PC3
- This test case is incomplete for UE power classes other than PC3
- This test case is incomplete for test frequencies > 40.8 GHz

7.6.16.3.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting for NCSG with SSB-based measurement with deactivated SCELL.

7.6.16.3.2 Test applicability

This test applies to all types of NR UEs supporting NR NCSG capability from release 17 onwards supporting 2DL CA.

7.6.16.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.16.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.16.3.

7.6.16.3.4 Test description

7.6.16.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for NR Cells are shown in Table 7.6.16.3.4.1-1.

Table 7.6.16.3.4.1-1: Supported test configurations for FR2 deactivated Scell measurement via NCSG

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note 1: Same configuration applies to both PCell and SCell	

Test environment parameters are given in Table 7.6.16.3.4.1-2.

Table 7.6.16.3.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.14.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 7.6.16.3.4.1-3.

2. Message contents are defined in clause 7.6.16.3.4.3.

3. Three cells are deployed in the test, which are FR2 PCell (Cell 1), FR2 SCell (Cell2) and FR2 neighbour cell (Cell3) on the same frequency as the SCell. Cell 1 and Cell 2 shall be configured according to Annex C.1.1 and C.1.2.

Table 7.6.16.3.4.1-3: General test parameters for FR2 deactivated SCell measurement via NCSG

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR radio channels are used for this test. Cell 1 uses RF channel 1. Cell 2 and Cell 3 use RF channel 2.
Hysteresis	dB	0	
A3-Offset	dBm	-11	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	DRX is not used

NCSG Pattern Id		0	As specified in TS 38.133[6] clause Table 9.1.9.3-1.
NCSG offset	ms	39	
NCSG mgta	ms	0	
Time offset between Cell 2 and Cell 3	us	3	Synchronous cells
SCell measurement cycle (measCycleSCell)	ms	160	
T1	s	5	
T2	s	15	

7.6.16.3.4.2 Test procedure

Three cells are delployed in the test, which are FR2 PCell(Cell1), FR2 SCell(Cell2) and FR2 neighbour cell(Cell3) on the same frequency as the SCell. The SCell is deactivated during the test. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered with Event A6 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 3. The PCell shall continuously schedule with data in the DL starting from T1 until the UE has sent the measurement report during T2. The test parameters are given in Table 7.6.16.3.4.1-3 and Table 7.6.16.3.5-1 respectively.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.16.3.5-1.

3. SS shall configure SCell (Cell2) on the SCC as per TS 38.508-1[14] clause 7.5.1 and provide measurement configurations.

4. T1 starts, SS continuously schedules on PCell with data in the DL starting from T1 and UE shall start sending ACK/NACK reports. The SS shall monitor ACK/NACK/DTX on PCell.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.16.3.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A6. If the overall delays measured from the beginning of time period T2 is less than 12.8s for UE support power class 1 or 5, 7.68s for UE supporting power class 2, 3, and 4 and DTX in PCell is not observed by the SS for the corresponding PDSCH scheduled in PCell in all the slots expect for the case where PDSCH or PUCCH is overlapped with VIL of NCSG pattern, then the number of successful tests is increased by one. If the UE fails to report the events within the overall delays measured requirements or DTX in PCell is observed by the SS except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern, then the number of failure tests is increased by one.

7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED

with generic procedure parameters Connectivity NR SA, Connected without release On according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.16.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 7.6.16.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions Deactivated SCell Table H.3.1-5 Table H.3.1-7 with condition Deactivated SCell

Table 7.6.16.3.4.3-2: ServingCellConfig (Cell 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
servingCellMO	2	MeasObjectId for SCell in Table H.3.1-2	
}			

Table 7.6.16.3.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
cellsToAddModList ::= SEQUENCE {(SIZE (1..maxNrofCekkMeas)) OF CellsToAddMod {	1 entry		
CellsToAddMod SEQUENCE {			
phyCellId	Cell 3 physical cell identity		
cellIndividualoffet	dB16		
}			
}			
measCycleSCell-v1530	sf160		
associatedMeasGapSSB-r17	1		
}			

Table 7.6.16.3.4.3-4: ReportConfigNR(Step 3)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition EVENT_A6			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA6 SEQUENCE {			
a6-Offset CHOICE {			

rsrp	-22	The actual value is field value * 0.5 dB.	
}			
hysteresis	0		
timeToTrigger	ms0		
}			
}			
}			
}			
}			

Table 7.6.16.3.4.3-5: MeasGapConfig(Step 3)

Derivation Path: Table H.3.1-6 with condition MGe and NCSG		
Information Element	**Value/remark**	**Comment**
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	1 entry	
GapConfig-r17[1] SEQUENCE {		
measGapId-r17	1	
gapOffset-r17	39	
mgl-r17	ms5	
mgrp-r17	ms40	
mgta-r17	ms0	
ncsgInd-r17	true	
}		

7.6.16.3.5 Test requirement

Table 7.6.16.3.4.1-3, 7.6.16.3.5-1 , and Table 7.6.16.3.5-2 defines the primary level settings including test tolerances for all tests.

Table 7.6.16.3.5-1: Cell specific test parameters for FR2 deactivated Scell measurement via NCSG

Parameter[Note 5]	**Unit**	**Cell 1**	**Cell 2**	**Cell 3**
SSB ARFCN		freq1	freq2	freq2
Duplex mode		TDD		
TDD configuration		TDDConf.3.1		
Downlink initial BWP Configuration		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
Downlink dedicated BWP Configuration		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
Uplink initial BWP configuration		ULBWP.0.1	ULBWP.0.1	ULBWP.0.1
Uplink dedicated BWP configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
TRS configuration		TRS.2.1 TDD	TRS.2.1 TDD	N/A
TCI state		TCI.State.0	TCI.State.0	N/A
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		
Data RBs allocated		24	24	24
PDSCH Reference measurement channel		SR.3.2 TDD	SR.3.2 TDD	N/A
RMSI CORESET Parameters		CR.3.1 TDD	-	N/A
Dedicated CORESET Parameters		CCR.3.1 TDD	CCR.3.1 TDD	N/A
OCNG Patterns		OP.1	OP.5	N/A
SSB Configuration		SSB.1 FR2	SSB.3 FR2	SSB.7 FR2
SMTC Configuration		SMTC.1	SMTC.1	
cellIndividualOffset		N/A	N/A	16
EPRE ratio of PSS to SSS	dB	0		
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS[Note 1]				
EPRE ratio of OCNG to OCNG DMRS [Note 1]				
Propagation conditions		AWGN		

Note 1:	OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table 7.6.16.3.5-2: OTA related test parameters for FR2 deactivated Scell measurement via NCSG

Parameter	Unit	Cell 1		Cell 2		Cell 3	
		T1	T2	T1	T2	T1	T2
Angle of arrival configuration		Setup 3 defined in A.9.3					
		AoA1		AoA1		AoA2	
Assumption for UE beams Note 3		Rough		Rough		Rough	
E_s	dBm/SCS	-89		-89	-89	-infinity	-89
SSB_RP Note2	dBm/SCS Note4	-89		-89	-89	-infinity	-89
$\hat{E}_s / I_{ot}$ BB Note 4	dB	-0.12		-0.12	-0.12	-infinity	-0.12
Io Note2	dBm/95.04 MHz Note4	-64.41		-64.41	-64.41	-infinity	-64.41
Time multiplexing of the downlink transmissions from each AoA		N/A		Defined in Figure A.7.6.1.1.1-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 4: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4

UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

12.8s for UE supporting power class 1 and 5, or

7.68s for UE supporting other power class.

UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

During the T1 and T2, UE be able to report ACK/NACK for all slots with PDCCH/PDSCH on PCell excluding those slots overlapped with

VIL1, ML and VIL2 of NCSG for intra-band FR2 CA

VIL1 and VIL2 of NCSG for inter-band FR2 CA

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.17 SA event triggered reporting tests for concurrent measurement gaps with Pre-MG in FR2

7.6.17.0 Minimum conformance requirements

7.6.17.0.1 Minimum conformance requirements for SA event triggered reporting with one pre-configured gap and one measurement gap

FFS

7.6.17.1 NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX

Editor's Note: This test case is incomplete in following aspects:

TT analysis is missing.

Test applicability is missing in 38.522

Message contents are FFS

Test procedure is missing

Minimum conformance requirement is FFS

7.6.17.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event with one pre-configured gap and one measurement gap for SSB-based measurements.

7.6.17.1.2 Test applicability

This test applies to all types of NR UE from release 18 onwards supporting preconfiguration of MGs in RRC signalling.

7.6.17.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.17.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.17 .1.

7.6.17.1.4 Test description

7.6.17.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.17.1.4.1-1

Table 7.6.17.1.4.1-1: Supported test configurations

Configuration	Description
7.6.17.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Test environment parameters are given in Table 7.6.17.1.4.1-2.

Table 7.6.17.1.4.1-2: Initial conditions for TBD

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.14.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.6.17.1.4.1-3.
2. Message contents are defined in clause 7.6.17.1.4.3.
3. Three cells are deployed in the test. NR cell 1 as PCell in FR2 on NR RF channel 1, NR cell 2 as intra-frequency neighbour cell in FR2 on NR RF channel 1, and NR cell 3 as inter-frequency neighbour cell in FR2 on NR RF channel 2.

Table 7.6.17.1.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR Cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR Cell 2 and 3	NR Cell 2 is on NR RF channel number 1. NR Cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1	14 for MG#1 (80 ms MGRP) 13 for MG#2 (40 ms MGRP)	As specified in TS 38.133 [6] clause 9.1.2-1
Measurement gap offset		Config 1	79 for MG#1 4 for MG#2	
SMTC configuration		Config 1	SMTC.1 for MO#1 SMTC.7 for MO#2	As specified in clause A.4
offsetMO	dB	Config 1	16	Applied to NR Cell 2 and 3 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between Cell 1 and Cell 2		Config 1	3μs	Cell 2 is synchronous to Cell 1
Time offset between Cell 1 and Cell 3		Config 1	5 ms	Cell 3 is asynchronous to Cell 1
T1	s	Config 1	5.2	
T2	s	Config 1	6.5	

7.6.17.1.4.2 Test procedure

TBD

7.6.17.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

FFS

7.6.17.1.5 Test requirements

Table 7.6.17.1.4.1-3, 7.6.17.1.5-1, and Table 7.6.17.1.5-2 defines the primary level settings for all tests.

Table 7.6.17.1.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
AoA setup		Config 1	Setup 3 as specified in clause A.3.15					
			AoA1		AoA2		AoA2	
Beam Assumption[Note 4]		Config 1	Rough		Rough		Rough	
NR RF Channel Number		Config 1	1		1		2	
Duplex mode		Config 1	TDD		TDD		TDD	
TDD configuration		Config 1	TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	Config 1	100: $N_{PRB,c}$ = 66		100: $N_{PRB,c}$ = 66		100: $N_{PRB,c}$ = 66	
Data PRBs allocated		Config 1	66		66		66	
BWP-1 Configuration		Config 1	DLBWP.1.6 ULBWP.1.6		N/A		N/A	
BWP-2 Configuration		Config 1	DLBWP.1.5 ULBWP.1.5		N/A		N/A	
SSB configuration			SSB.3 FR2		SSB.7 FR2		SSB.3 FR2	

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1	OP.1		N/A		N/A	
PDSCH Reference measurement channel		Config 1	SR.3.1 TDD		N/A		N/A	
CORESET Reference Channel		Config 1	CR.3.1 TDD		N/A		N/A	
TRS configuration		Config 1	TRS.2.1 TDD		N/A		N/A	
PDSCH/PDCCH TCI state		Config 1	TCI.State.2		N/A		N/A	
EPRE ratio of PSS to SSS		Config 1	0		0		0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
$\hat{E}_S$	dBm/SCS	Config 1	-87+TT	-87+TT	-Infinity	-87+TT	-87+TT	-87+TT
SSB_RP Note 2	dBm/SCS Note3	Config 1	-87+TT	-87+TT	-Infinity	-87+TT	-87+TT	-87+TT
$\hat{E}_s/I_{ot\ BB}$ Note 5	dB	Config 1	1.89+TT	1.89+TT	-Infinity	1.89+TT	1.89+TT	1.89+TT
Io Note 2	dBm/95.04 MHz Note3	Config 1	-58.01+TT	-58.01+TT	-Infinity	-58.01+TT	58.01+TT	-58.01+TT
Propagation Condition		Config 1	AWGN					

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
NOTE 4: Information about types of UE beam is given in clause B.2.1.3, and does not limit UE implementation or test system implementation
NOTE 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1 dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

For UE supporting FG 32-2:

During T1, the UE shall report ACK/NACK for PDSCHs scheduled in the slots that are not overlapped with the MG#2 occasions. The UE shall send one Event A3 triggered measurement report for Cell 3, with a measurement reporting delay less than X ms from the beginning of time period T1, where X is

5120 for UE supporting power class 1 and 5, or

3200 for UE supporting other power class.

For UE not supporting FG 32-2:

During T1, the UE shall report ACK/NACK at least for PDSCHs scheduled in the slots that are not overlapped with the non-dropped MG#2 occasions. The UE shall send one Event A3 triggered measurement report for Cell 3, with a measurement reporting delay less than X ms from the beginning of time period T1, where X is

10240 for UE supporting power class 1 and 5, or

6400 for UE supporting other power class.

For both UE supporting FG 32-2 and not supporting FG 32-2:

During T2, the UE shall report ACK/NACK for PDSCHs scheduled in the slots that are not overlapped with the MG#1 occasions or non-dropped MG#2 occasions after MG#1 is activated, i.e. starting from the 1 s^t complete MG#1 occasion after the beginning of PCell's DL slot ($i+T_{BWPswitchDelay}$) + 5 ms as defined in clause 8.19.2. The UE shall send one Event A3 triggered measurement report for Cell 2, with a measurement reporting delay less than Y ms from the beginning of time period T2, where Y is

6480 for UE supporting power class 1 and 5, or

3920 for UE supporting other power class.

Y is derived based on the requirements for intra-frequency measurement plus 80 ms, considering that the first MG#1 occasion in T2 may collide with the pre-configured gap activation delay.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90 % with the confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.17.2 NR SA FR2-FR2 event-triggered reporting with two concurrent Pre-MGs

Editor's Note: This test case is incomplete in following aspects:

TT analysis is missing.

Test applicability is missing in 38.522

Message contents are FFS

Test procedure is missing

Minimum conformance requirement is FFS

7.6.17.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event with autonomous activation/deactivation of Pre-MGs within FR2 concurrent gaps. The test will partly verify the TDD inter-frequency cell search requirements in TS 38.133 [6] clause 9.2.6.and 9.3.4. Also, this test will also jointly verify pre-configured measurement gap activation/deactivation delay in TS 38.133 [6] clause 8.19.2.

7.6.17.2.2 Test applicability

This test applies to all types of NR UE from release 18 onwards supporting pre-configuration of MGs in RRC signalling.

7.6.17.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.17.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.17.2.

7.6.17.2.4 Test description

7.6.17.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.17.2.4.1-1

Table 7.6.17.2.4.1-1: Supported test configurations

Configuration	Description
7.6.17.2-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Test environment parameters are given in Table 7.6.17.2.4.1-2.

Table 7.6.17.2.4.1-2: Initial conditions for NR SA FR2-FR2 event-triggered reporting with two concurrent Pre-MGs

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.17.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

1. The general test parameter settings are set up according to Table 7.6.17.2.4.1-3.
2. Message contents are defined in clause 7.6.17.2.4.3.
3. Two cells are deployed in the TBD.

Table 7.6.17.2.4.1-3: General test parameters for intra-frequency event triggered reporting with autonomous activation/deactivation of Pre-MG

Parameter	Unit	Test configuration	Value	Comment
Active cell		Config 1	PCell (Cell 1)	
Neighbour cell		Config 1	Cell 2	Cell to be identified.
RF Channel Number		Config 1	1: Cell 1 , 2: Cell 2	
SMTC configuration		Config 1	SMTC.1	Same configuration for MO1 and MO2
A4-Threshold	dBm	Config 1	-120	
CP length		Config 1	Normal	
Hysteresis	dB	Config 1	0	
Time To Trigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	
Gap Pattern Id		Config 1	13	For both pre-conifgured gaps
Measurement gap offset	ms	Config 1	9 for MeasGapId #1 19 for MeasGapId #2	No overlapping cases
Time offset between serving and neighbour cells		Config 1	3 μs	Synchronous cells
T1	s	Config 1	5	
T2	s	Config 1	0.2	
T3	s	Config 1	10.4 for PC1 and PC5; 6.5 for other PC	

7.6.17.2.4.2 Test procedure

FFS

7.6.17.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

FFS

7.6.17.2.5 Test requirements

Table 7.6.17.2.4.1-3, 7.6.17.2.5-1, and Table 7.6.17.2.5-2 define the primary level settings for all tests.

Table 7.6.17.2.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting with autonomous activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	100: $N_{PRB,c}$ = 66			100: $N_{PRB,c}$ = 66		
Data PRBs allocated		24			24		
Intial BWP configuration		DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1		
BWP-1 Configuration		DLBWP.1.6 ULBWP.1.6			N/A		
BWP-2 Configuration		DLBWP.1.5 ULBWP.1.5			N/A		
RLM-RS		CSI-RS			N/A		
PDSCH RMC configuration		SR.3.2 TDD			N/A		
RMSI CORESET RMC configuration		CR.3.1 TDD			N/A		
Dedicated CORESET RMC configuration		CCR.3.1 TDD			N/A		
TRS configuration		TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI states		TCI.State.2			N/A		
PDSCH/PDCCH subcarrier spacing	kHz	120			120		
OCNG Patterns		OP.5			N/A		
cellIndividualOffset	dB	N/A			16		
SSB		SSB.1 FR2			SSB.7 FR2		
Propagation Condition		AWGN			AWGN		

Table 7.6.17.2.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting with automous activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.3.15.3					
		AoA1			AoA2		
Beam assumption Note 3		Rough			Rough		
E_S	dBm/SCS	-89+TT	-89+TT	-89+TT	-infinity	-89+TT	-89+TT
$\hat{E}_s/I_{ot\ BB}$ Note 4	dB	-0.12+TT	-0.12+TT	-0.12+TT	-Infinity	-0.12+TT	-0.12+TT
SSB_RP	dBm/SCS	-89+TT	-89+TT	-89+TT	-infinity	-89+TT	-89+TT
Io	dBm/95.04 MHz	-64.41+TT	-64.41+TT	-64.41+TT	-Infinity	-64.41+TT	-64.41+TT
Time multiplexing of the downlink transmissions from each AoA		Defined in figure A.7.6.1.1.1-1					

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: Information about types of UE beam is given in clause B.2.1.3, and does not limit UE implementation or test system implementation
NOTE 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1 dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

During T1, the UE shall be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots that are not overlapped with the Pre-MG#2 occasions.

During T2 and T3, the UE shall be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots that are not overlapped with the Pre-MG#1 or Pre-MG#2 occasions, starting from the 1 s^t complete Pre-MG#1 occasion after the beginning of PCell's DL slot ($i+T_{BWPswitchDelay}$) + 5 ms as defined in clause 8.19.5.

The UE shall send one Event A3 triggered measurement report for measurements on cell 2, with a measurement reporting delay less than Y ms from the beginning of time period T3, where Y is

- 5120 ms for a UE supporting power class 1 and 5,
- 3200 ms for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90 % with the confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.18 SA event triggered reporting tests with concurrent gaps and NCSG

7.6.18.0 Minimum conformance requirements

7.6.18.0.1 Minimum conformance requirements for concurrent measurement gaps with NCSG

When UE supports *concurrentMeasGapsNCSG-r18* capability, network can provide multiple measurement gaps with at least one of the measurement gaps is NCSG configured by RRC message(s) as specified in TS 38.331 [13].

If the UE requires concurrent measurement gaps and/or NCSG to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE supports *concurrentMeasGapsNCSG-r18* but does not support *independentGapConfig* or *ncsg-MeasGapPerFR-r17* in order for the requirements in the following clauses to apply, the network can provide one per-UE concurrent measurement gap and one per-UE NCSG or at most two per-UE NCSGs for monitoring of all frequency layers.

If the UE requires concurrent measurement gaps and/or NCSG to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE supports *concurrentMeasGapsNCSG-r18, independentGapConfig* and *ncsg-MeasGapPerFR-r17* in order for the requirements defined for concurrent measurement gaps with NCSG to apply, the network can provide the concurrent measurement gap with NCSG combinations configurations specified in table 7.6.18.0.1-1 for monitoring of all frequency layers.

Table 7.6.18.0.1-1: The number of Gap Combination Configurations by UE supporting concurrent measurement gap with NCSG patterns, per-FR NCSG patterns and independent measurement gap patterns

Gap Combination Configuration Id	The number of simultaneous configured measurement gap patterns		
	Per-FR1 measurement gap/NCSG	Per-FR2 measurement gap/NCSG	Per-UE measurement gap/NCSG
0	2	1	0
1	1	2	0
2	0	0	2
3 Note 1	1	0	1
4 Note 1	0	1	1
5 Note 1	1	1	1
6	2	0	0
7	0	2	0

Note 1: Gap Combination Configuration Id #3, #4, #5 will be only applied when the per-UE measurement gap (and cannot be NCSG) is associated to measure PRS for any RSTD, PRS-RSRP, RSCP, RSCPD, UE Rx-Tx time difference and PRS-RSRPP measurement defined in TS 38.215 [10], and when the per-FR measurement gap in an FR is NCSG.

Note 2: In Gap Combination Configuration Id #0, #1, #6, #7, one per-FR measurement gap in an FR (and cannot be NCSG) can be associated to measure PRS for any RSTD, PRS-RSRP, RSCP, RSCPD, UE Rx-Tx time difference and PRS-RSRPP measurement defined in TS 38.215 [4] provided that UE supports *independentGapConfigPRS-r17*.

Note 3: In Gap Combination Configuration Id #0, #1, #2, #6, #7, one FR can be configured with up to 2 NCSGs, regardless they are per-UE or per-FR configured. Otherwise, the gaps can only be configured as Gap(s) configured via *GapConfig* without suffix or Gap(s) configured via *GapConfig-r17* without *ncsgInd-r17*.

For UE configured in the SA operation mode, when monitoring of multiple inter-RAT E-UTRAN carrier frequency layers, intra-frequency NR carrier frequency layers and/or inter-frequency NR carrier frequency layers as configured by PCell using gaps, each monitored carrier frequency layer, including following measurement types:

- a measurement object with SSB based measurement,
- E-UTRA inter-RAT measurement object,

can be associated to either one concurrent measurement gap pattern or one NCSG pattern, while the following measurement types:

- a measurement object with CSI-RS based measurement,
- E-UTRAN inter-RAT RSTD measurement,
- NR PRS-based positioning measurement,

can be only associated to one measurement gap pattern. Requirements for UE capable of *concurrentMeasGapsNCSG-r18* apply provided that each frequency layer is only associated with one concurrent measurement gap or one NCSG, and at least one of the gaps is NCSG. There can be one or more frequency layers associated with each concurrent measurement gap or each NCSG. Furthermore, if the UE is not capable of *concurrentMeasGapEUTRA-r17*[2], all E-UTRAN measurement objects shall be associated with a single concurrent measurement gap or NCSG for the requirement to apply.

When UE supports *concurrentMeasGapsNCSG-r18*, where at least one of the concurrent gaps is NCSG, supported concurrent measurement gap patterns are listed in TS 38.133 [6] table 9.1.2-1 based on the applicability specified in TS 38.133 [6] table 9.1.2-3, while supported NCSG patterns are listed in TS 38.133 [6] table 9.1.9.3-1 based on the applicability specified in TS 38.133 [6] table 9.1.9.3-2.

The requirements in TS 38.133 [6] clause 9.1.2 are also applicable for the UE capable of *concurrentMeasGapsNCSG-r18* and configured with multiple measurement gap or NCSG patterns within each concurrent measurement gap pattern. The requirements in TS 38.133 [6] clause 9.1.9 are also applicable for the UE capable of *concurrentMeasGapsNCSG-r18* and configured with multiple measurement gap or NCSG patterns within each NCSG pattern.

7.6.18.1 NR SA FR2 event-triggered reporting with concurrent Type-2 measurement gap and NCSG

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Test applicability is missing in 38.522
- Message contents are FFS
- Test procedure is missing

7.6.18.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event for each neighbour cell. This test will partly verify the SA inter-frequency NR cell search requirements and collision handling between partially overlapped concurrent gaps and NCSG.

7.6.18.1.2 Test applicability

This test applies to all types of NR UE from release 18 onwards supporting *concurrentMeasGapsNCSG-r18* capability.

7.6.18.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.18.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.18 .1.

7.6.18.1.4 Test description

7.6.18.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.18.1.4.1-1

Table 7.6.18.1.4.1-1: Supported test configurations

Configuration	Description
7.6.18.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Test environment parameters are given in Table 7.6.18.1.4.1-2.

Table 7.6.18.1.4.1-2: Initial conditions for TBD

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.14.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.6.18.1.4.1-3.
2. Message contents are defined in clause 7.6.18.1.4.3.
3. NR cell 1 as PCell in FR2 on NR RF channel 1, NR cell 2 as neighbour cell in FR2 on NR RF channel 2 and NR cell 3 as another neighbour cell in FR2 on NR RF channel 3.

Table 7.6.18.1.4.1-3: General test parameters for event-triggered reporting with concurrent Type-2 measurement gap and NCSG

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2, 3	Three FR2 NR carrier frequencies are used
Active cell		Config 1	NR cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1
1 s^{t} Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2
2nd Neighbour cell		Config 1	NR cell 3	NR cell 3 is on NR RF channel number 3
Measurement Gap Pattern Id		Config 1	13	As specified in table 9.1.2-1
NCSG Pattern Id		Config 1	14	As specified in table 9.1.9.3-1
Measurement Gap offset	ms	Config 1	39	
NCSG offset	ms	Config 1	4	
Measurement Gap priority		Config 1	2	Second level priority
NCSG priority		Config 1	1	Highest priority
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 and NR Cell 3 measurement objects
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used

Parameter	Unit	Test configuration	Value	Comment
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells
T1	s	Config 1	5	
T2	s	Config 1	5.2 for PC1 and PC5; 3.5 for other PC	

7.6.18.1.4.2 Test procedure

TBD

7.6.18.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

TBD

7.6.18.1.5 Test requirements

Table 7.6.18.1.4.1-3, 7.6.18.1.5-1, and Table 7.6.18.1.5-2 defines the primary level settings for all tests.

Table 7.6.18.1.5-1: Cell specific test parameters for event-triggered reporting with concurrent Type-2 measurement gap and NCSG

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15					
				AoA1		AoA2		AoA3	
Beam Assumption[Note 7]			1,2	Rough		Rough		Rough	
NR RF Channel Number			Config 1	1		2		3	
Duplex mode			Config 1	TDD		TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{PRB,c}$ = 66		100: $N_{PRB,c}$ = 66		100: $N_{PRB,c}$ = 66	
Data PRBs allocated			Config 1	66		66		66	
BWP BW		MHz	Config 1	100: $N_{PRB,c}$ = 66		100: $N_{PRB,c}$ = 66		100: $N_{PRB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A		N/A	
	Initial UL BWP			ULBWP.0.1		N/A		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-		-	
SMTC configuration defined in A.3.11.1 and A.3.11.7			Config 1	SMTC.1		SMTC.1		SMTC.7	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A		N/A	
EPRE ratio of PSS to SSS									
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
EPRE ratio of PDCCH DMRS to SSS		Config 1	0		0		0	
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
$\hat{E}_s$	dBm/SCS	Config 1	-87	-87	-Infinity	-87	-Infinity	-87
SSBRP Note 3	dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1	1.89	1.89	-Infinity	1.89	-Infinity	1.89
Io Note3	dBm/95.04 MHz Note 5	Config 1	-58.01	-58.01	-Infinity	-58.01	-Infinity	-58.01
Propagation Condition		Config 1	AWGN				AWGN	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Void
NOTE 3: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Void
NOTE 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
NOTE 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
NOTE 7: Information about types of UE beam is given in clause B.2.1.3, and does not limit UE implementation or test system implementation
NOTE 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1 dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

For both NR cell 2 and NR cell 3, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1 and 5, or

6400 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90 % with the confidence level of 95%.

During the T1 and T2, UE shall be able to report ACK/NACK for all slots with PDCCH/PDSCH on PCell excluding those slots overlapped with

VIL1 and VIL2 of NCSG

Measurement gap

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.7.6.19 SA event triggered reporting tests with NeedForGap in FR2

7.6.19.0 Minimum conformance requirements

7.6.19.0.1 Minimum conformance requirements for Intra-frequency measurements with measurement gaps

When a measurement gap is provided or an activated Pre-MG is provided without any pre-MG status changed during the measurement period, the UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise, UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_with_index.}$ The UE shall be able to identify a new detectable intra-frequency SS block of an already detected cell within $T_{identify_intra_without_index.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR2 with SCS smaller or equal to 480 kHz.

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}\ ms$$

$$T_{identify_intra_with_index} = T_{PSS/SSS_sync_ntra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}\ ms$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in tables 7.6.19.0.1-1 or 7.6.19.0.1-2.

- For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if SMTC $\leq$ 40ms, T_{PSS/SSS_sync_intra} is given in table 7.6.19.0.1-2; otherwise, T_{PSS/SSS_sync_intra} is given in table 7.6.19.0.1-1.

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given table 7.6.19.0.1-3 (for FR2-2).

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 7.6.19.0.1-7 or 7.6.19.0.1-4.

- For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if SMTC $\leq$ 40ms, $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.1-5; otherwise, $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.1-4.

- For power class 6 UE supporting *measEnhCAInterFreqFR2-r18* when *highSpeedMeasFlagFR2-r17* is configured, the $T_{SSB_measurement_period_intra}$ given in table 7.6.19.0.1-5 (if SMTC $\leq$ 40ms) and table 7.6.19.0.1-4 (if SMTC > 40ms) shall apply for SCC.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. K_{gap} = 1 when the UE is not configured with or the UE does not support concurrent GAPs or MUSIM gaps. Otherwise, $K_{gap} = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

For a window W of duration max(SMTC period, xRP_max), where xRP_max is the maximum xRP across all configured per-UE GAPs, periodic MUSIM gaps and per-FR GAPs within the same FR as the SSB frequency layer, and starting from the beginning of any SMTC occasion:

- N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W, including those overlapped with other GAP and MUSIM gap occasions within the window, and

$N_{available}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W after accounting for GAP and MUSIM gap collisions by applying

the collision rules for GAP and MUSIM gap in clauses 9.1.8.3, 9.1.10.4, 9.1.10.5, 9.1.12.3, and 9.1.13.3, respectively.

- xRP = MGRP when configured GAP is activated Pre-MG or MG, and xRP = VIRP when configured GAP is NCSG, also xRP = MGRP for periodic MUSIM gap.

When concurrent GAPs are configured, requirements in this clause do not apply if $N_{available}$ =0.

When UE supports [*MUSIM-GapConfig-17*] and the configured aperiodic MUSIM gap collides with the measurement gap associated with the target frequency layer, where MUSIM gap collision rule in clause 9.1.10.4 is applied, longer cell identification period for the target intra-frequency is expected.

$M_{pss/sss_sync_with_gaps}$: For a UE supporting FR2-1 power class 1 or 5, $M_{pss/sss_sync\ with_gaps}$=40. For a UE supporting FR2-1 power class 2, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2-1 power class 3, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2-1 power class 4, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2-1 power class 6, $M_{pss/sss_sync\ with_gaps}$ =24. For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync\ with_gaps}$ = 60. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync\ with_gaps}$ = 36. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync\ with_gaps}$ = 36.

$M_{meas_period_with_gaps}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_with_gaps}$ =40. For a UE supporting FR2-1 power class 2, $M_{meas_period_with_gaps}$ =24. For a UE supporting FR2-1 power class 3, $M_{meas_period_with_gaps}$ =24. For a UE supporting FR2-1 power class 4, $M_{meas_period\ with_gaps}$ =24. For a UE supporting FR2-1 power class 6, $M_{meas_period\ with_gaps}$ =24. For a UE supporting FR2-2 power class 1, $M_{meas_period_with_gaps}$ = 60. For a UE supporting FR2-2 power class 2, $M_{meas_period_with_gaps}$ = 36. For a UE supporting FR2-2 power class 3, $M_{meas_period_with_gaps}$ = 36.

- $M_{SSB_index_intra}$: For a UE supporting FR2-2 power class 1, $M_{SSB_index_intra}$ = 72. For a UE supporting FR2-2 power class 2, $M_{SSB_index_intra}$ = 48. For a UE supporting FR2 power class 3, $M_{SSB_index_intra}$ = 48.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$.

If MCG DRX is in use, cell identification requirements for intra-frequency measurement in MCG specified in table 7.6.19.0.1-1 shall depend on the MCG DRX cycle. If SCG DRX is in use, cell identification requirements for intra-frequency measurement in SCG specified in table 7.6.19.0.1-1 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 7.6.19.0.1-1: Time period for PSS/SSS detection (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600 ms, $M_{pss/sss_sync_with_gaps}$ x K_{FR} x K_{gap} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320 ms	max(600 ms, ceil(1.5x $M_{pss/sss_sync_with_gaps}$ x K_{FR} x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320 ms	Ceil($M_{pss/sss_sync_with_gaps}$ x K_{FR} x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent GAPs, if multiple concurrent GAPs are configured, the MGRP is the periodicity of the activated Pre-MG or the MG pattern associated to the intra-frequency layer. NOTE 2: K_{FR} is a scaling factor depending on the frequency range and the SSB SCS. For FR2-1, K_{FR} = 1. For FR2-2: K_{FR} = 1 if the SCS of the SSB of the cell being detected is 120 kHz, K_{FR} = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and K_{FR} = 3 if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 7.6.19.0.1-2: Time period for PSS/SSS detection when *highSpeedMeasFlagFR2-r17* is configured, (FR2) when SMTC period ≤ 40ms

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600 ms, $M1^{Note\ 2}$ x K_{gap} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 80 ms	max(600 ms, ceil($M1^{Note2}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
80 ms< DRX cycle≤ 320 ms	max(600 ms, ceil($M_{pss/sss_sync_with_gaps}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320 ms	Ceil($M_{pss/sss_sync_with_gaps}$ x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent GAPs, if multiple concurrent GAPs are configured, the MGRP is the periodicity of the activated Pre-MG or the MG pattern associated to the intra-frequency layer. NOTE 2: For UE supporting power class 6, M1 = 6 if *highSpeedMeasFlagFR2-r17* = set1 or M1 = 18 if *highSpeedMeasFlagFR2-r17* = set2	

NOTE 3: Void

Table 7.6.19.0.1-3: Time period for time index detection (FR2-2)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(200 ms, ceil($M_{SSB_index_intra}$ x K_{gap} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320 ms	max(200 ms, ceil(1.5 x $M_{SSB_index_intra}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle) x $CSSF_{intra}$)
DRX cycle>320 ms	Ceil($M_{SSB_index_intra}$ x K_{gap})x DRX cycle x $CSSF_{intra}$

The requirements in this clause apply when a measurement gap is provided or when an activated Pre-MG is provided without any pre-MG status changed during the measurement period.

The measurement period for FR2 intra-frequency measurements with gaps is as shown in table 7.6.19.0.1-4.

For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if SMTC $\leq$ 40ms, $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.1-5; otherwise, $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.1-4.

For power class 6 UE supporting *measEnhCAInterFreqFR2-r18* when *highSpeedMeasFlagFR2-r17* is configured, the $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.1-5 (if SMTC $\leq$ 40ms) and table 7.6.19.0.1-4 (if SMTC > 40ms) shall apply for SCC.

If MCG DRX is in use, measurement period requirements for intra-frequency measurement in MCG specified in table 7.6.19.0.1-4, shall depend on the MCG DRX cycle. If SCG DRX is in use, measurement period requirements for intra-frequency measurement in SCG specified in table 7.6.19.0.1-4, shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

For FR2 serving cell, longer measurement period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Table 7.6.19.0.1-4: Measurement period for intra-frequency measurements with gaps (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400 ms, ceil($M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320 ms	max(400 ms, ceil(1.5 x $M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) Note 1 x $CSSF_{intra}$
DRX cycle>320 ms	Ceil($M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent GAPs, if multiple concurrent GAPs are configured, the MGRP is the periodicity of the activated Pre-MG or the MG pattern associated to the intra-frequency layer.	

Table 7.6.19.0.1-5: Measurement period for intra-frequency measurements with gaps when *highSpeedMeasFlagFR2-r17* is configured (FR2-1) when SMTC period≤40ms

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400 ms, ceil(M1 Note 2 x K_{gap}) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 80 ms	max(400 ms, ceil(M1 Note 2 x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) Note 1 x $CSSF_{intra}$
80 ms< DRX cycle≤ 320 ms	max(400 ms, ceil($M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, SMTC period, DRX cycle)) Note 1 x $CSSF_{intra}$
DRX cycle>320 ms	Ceil($M_{meas_period\ with_gaps}$ x K_{gap}) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: For a UE supporting concurrent GAPs, if multiple concurrent GAPs are configured, the MGRP is the periodicity of the activated Pre-MG or the MG pattern associated to the intra-frequency layer. NOTE 2: For UE supporting power class 6, M1 = 6 if *highSpeedMeasFlagFR2-r17* = set1 or M1 = 18 if *highSpeedMeasFlagFR2-r17* = set2 NOTE 3: Void	

7.6.19.0.2 Minimum conformance requirements for Intra-frequency measurements without measurement gaps

The UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_without_index}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the

serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise the UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR2 with SCS smaller or equal to 480 kHz.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra}) \text{ ms}$$

$$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection

- For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if SMTC ≤ 40ms, T_{PSS/SSS_sync_intra} is given in table 7.6.19.0.2-3; otherwise, T_{PSS/SSS_sync_intra} is given in table 7.6.19.0.2-1.
- For UE indicating *no-gap-no-interruption* via *NeedForInterruptionInfoNR-r18*, T_{PSS/SSS_sync_intra} is given in table 7.6.19.0.2-1 for FR2. For UE indicating *no-gap-with-interruption* via *NeedForInterruptionInfoNR-r18*, T_{PSS/SSS_sync_intra} is given in table and table 7.6.19.0.2-6 for FR2.

- Otherwise, T_{PSS/SSS_sync_intra} is given in tables , 7.6.19.0.2-1, or 7.6.19.0.2-2 (deactivated SCell) or 7.6.19.0.2-3 or 7.6.19.0.2-4 (deactivated PSCell).

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured

- For UE indicatting *no-gap-no-interruption* via *NeedForInterruptionInfoNR-r18*, $T_{SSB_time_index_intra}$ is given in table 7.6.19.0.2-5 for FR2-2.
- Otherwise, $T_{SSB_time_index_intra}$ is given in tables 7.6.19.0.2-5 (FR2-2).
- $T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement
  - For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if SMTC ≤ 40ms, $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.3-9; otherwise, $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.3-7.
  - For UE indicating *no-gap-no-interruption* via *NeedForInterruptionInfoNR-r18*, $T_{SSB_measurement_period_intra}$ is given in table table 7.6.19.0.3-7 for FR2. For UE indicating *no-gap-with-interruption* via *NeedForInterruptionInfoNR-r18*, $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.3-11 for FR2.
  - For power class 6 UE supporting *measEnhCAInterFreqFR2-r18* when *highSpeedMeasFlagFR2* is configured, the $T_{SSB_measurement_period_intra}$ given in table 7.6.19.0.3-9 (if SMTC ≤ 40ms) and table 7.6.19.0.3-7 (if SMTC > 40ms) shall apply for SCC.
- Otherwise, $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.3-7, 7.6.19.0.3-8 (deactivated SCell) or 7.6.19.0.3-10 (deactivated PSCell).
- $CSSF_{intra}$: it is a carrier specific scaling factor and is determined
  - according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e.
    - when intra-frequency SMTC is fully non overlapping or partially overlapping with GAP, or
    - when intra-frequency SMTC is fully non overlapping with GAP for UE indicating *no-gap-with-interruption*, or
    - when intra-frequency SMTC is fully non overlapping or partially overlapping with GAP for UE indicating *no-gap-no-interruption*, or

  For a UE that supports Pre-MG, an SMTC occasion is only considered to be overlapped by Pre-MG if the Pre-MG is activated.

  if the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

$M_{pss/sss_sync_w/o_gaps}$: For a UE supporting FR2-1 power class 1 or 5, $M_{pss/sss_sync_w/o_gaps}$ =40. For a UE supporting power class 2, $M_{pss/sss_sync_w/o_gaps}$ =24. For a UE supporting FR2-1 power class 3, $M_{pss/sss_sync_w/o_gaps}$ =24. For a UE supporting FR2-1 power class 4, $M_{pss/sss_sync_w/o_gaps}$ =24. For a UE supporting FR2-1 power class 6, $M_{pss/sss_sync_w/o_gaps}$ =24. For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync_w/o_gaps}$ = 60. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync_w/o_gaps}$ = 36. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync_w/o_gaps}$ = 36.

$M_{meas_period_w/o_gaps}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_w/o_gaps}$ =40. For a UE supporting FR2-1 power class 2, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting FR2-1 power class 3, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting power class 4, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting power class 6, $M_{meas_period_w/o_gaps}$ =24. For a UE supporting FR2-2 power class 1, $M_{meas_period_w/o_gaps}$ = 60. For a UE supporting FR2-2 power class 2, $M_{meas_period_w/o_gaps}$ = 36. For a UE supporting FR2-2 power class 3, $M_{meas_period_w/o_gaps}$ = 36.

$M_{SSB_index_intra}$: For a UE supporting FR2-2 power class 1, $M_{SSB_index_intra}$ = 72 samples. For a UE supporting FR2-2 power class 2, $M_{SSB_index_intra}$ = 48 samples. For a UE supporting FR2 power class 3, $M_{SSB_index_intra}$ = 48 samples.

When UE supports concurrent GAPs, i.e., supports the following capability or capabilities' combination:

- concurrentMeasGap-r17, or
- concurrentMeasGapsPreMG-r18, or
- concurrentMeasGapsNCSG-r18,

Or when UE supports *musim-GapPreference-r17* or both concurrent measurement GAPs and *musim-GapPreference-r17* and UE concurrent GAPs or periodic MUSIM gaps or both concurrent gaps and periodic MUSIM gaps are configured

K_p is the scaling factor for an SSB frequency layer to be measured without GAP. $K_p = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

- For a window W of duration max(SMTC period, xRP_max), where xRP_max is the maximum xRP across all configured per-UE GAPs, periodic MUSIM gaps, and/or per-FR GAPs within the same FR as the SSB frequency layer, and starting from the beginning of any SMTC occasion:
  - N_{total} is the total number of SMTC occasions within the window, including those overlapped with GAP and MUSIM gap occasions within the window, and
  - $N_{available}$ is the number of SMTC occasions that are not overlapped with any non-dropped GAP or non-dropped MUSIM gap occasions within the window W, after accounting for measurement GAP and MUSIM gap collisions by applying the collision rules for GAP and MUSIM gap in clauses 9.1.8.3, 9.1.10.4, 9.1.10.5, 9.1.12.3, and 9.1.13.3, respectively.

    $K_p = 1$ when $N_{available} = 0$.
  - xRP = MGRP when configured GAP is activated Pre-MG or MG, and xRP = VIRP when configured GAP is NCSG, also xRP = MGRP for periodic MUSIM gap.

    Requirements in this clause do not apply when $N_{available} = 0$ due to fully overlapping between SMTC occasions and MUSIM gap occasions within the window W.

When UE supports [*MUSIM-GapConfig-17]* and the SMTC occasion of the target frequency layer is overlapping with the configured aperiodic MUSIM gap, longer cell identification period for the target frequency layer is expected.

- Otherwise, when the UE is not configured with or UE does not support concurrent GAPs and the UE is not configured with periodic MUSIM gaps or UE does not support MUSIM gaps:

  When intra-frequency SMTC is fully non overlapping with measurement gaps or NCSG, or intra-frequency SMTC is fully overlapping with MGs or NCSG, Kp=1

  When intra-frequency SMTC is partially overlapping with measurement gaps, K_p = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP. When intra-frequency SMTC is partially overlapping with NCSG, K_p = 1/(1- (SMTC period /VIRP)), where SMTC period < VIRP. For calculation of K_p, if the high layer signalling (TS 38.331 [2]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*. If the higher layer signaling in TS 38.331 [2]

signalling of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$

For FR2,

$K_{layer1_measurement}$=1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same serving carrier which can be merged. and RSSI symbols are indicated by *SS-RSSI-Measurement*;

  $K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

If MCG DRX is in use, cell identification requirements for intra-frequency measurement in MCG specified in table, table 7.6.19.0.2-1 table 7.6.19.0.2-2 shall depend on the MCG DRX cycle. If SCG DRX is in use, cell identification requirements for intra-frequency measurement in SCG specified in table , table 7.6.19.0.2-1, table 7.6.19.0.2-2, table 7.6.19.0.2-4 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

- When the target SSB is completely contained in active BWP of UE or the active downlink BWP is initial BWP, the intra-frequency measurement shall be conducted without gap and without interruption regardless of the NeedForGaps' status reporting.

Table 7.6.19.0.2-1: Time period for PSS/SSS detection, (Frequency range FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600 ms, ceil($M_{pss/sss_sync_w/o_gaps}$ x K_{FR} x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320 ms	max(600 ms, ceil(1.5 x $M_{pss/sss_sync_w/o_gaps}$ x K_{FR} x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320 ms	ceil($M_{pss/sss_sync_w/o_gaps}$ x K_{FR} x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: K_{FR} is a scaling factor depending on the frequency range and the SSB SCS. For FR2-1, KFR = 1. For FR2-2: K_{FR} = 1 if the SCS of the SSB of the cell being detected is 120 kHz, K_{FR} = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and K_{FR} = 3 if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 7.6.19.0.2-2: Time period for PSS/SSS detection, deactivated SCell (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320 ms	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320 ms	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: The requirements also apply to deactivated SCG SCell.	

Table 7.6.19.0.2-3: Time period for PSS/SSS detection when *highSpeedMeasFlagFR2-r17* is configured, (FR2) when SMTC period ≤ 40ms

DRX cycle	T_{PSS/SSS_sync_intra}

No DRX	max(600 ms, ceil($M1^{Note 2}$ x K_p x $K_{layer1_measurement}$) x SMTC period)$^{Note 1}$ x $CSSF_{intra}$
DRX cycle≤ 80 ms	max(600 ms, ceil($M1^{Note 2}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
80 ms< DRX cycle≤ 320 ms	ceil(1.5 x $M_{pss/sss_sync_w/o_gaps}$ $^{Note 3}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle) x $CSSF_{intra}$
DRX cycle>320 ms	ceil($M_{pss/sss_sync_w/o_gaps}$ $^{Note 3}$ x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: For UE supporting power class 6, M1 = 6 if *highSpeedMeasFlagFR2-r17* = set1 or M1 = 18 if *highSpeedMeasFlagFR2-r17* = set2 NOTE 3: Void	

Table 7.6.19.0.2-4: Time period for PSS/SSS detection, deactivated PSCell (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x measCyclePSCell x $CSSF_{intra}$
DRX cycle≤ 320 ms	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x max(measCyclePSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320 ms	Ceil($M_{pss/sss_sync_w/o_gaps}$ x K_p) x max(measCyclePSCell, DRX cycle) x $CSSF_{intra}$

Table 7.6.19.0.2-5: Time period for time index detection (Frequency range FR2-2)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(200 ms, ceil($M_{SSB_index_intra}$ x K_p x SMTC period) x $CSSF_{intra}$
DRX cycle≤ 320 ms	max(200 ms, ceil(1.5 x $M_{SSB_index_intra}$ x K_p) x max(SMTC period, DRX cycle) x $CSSF_{intra}$)
DRX cycle>320 ms	Ceil($M_{SSB_index_intra}$ x K_p)x DRX cycle x $CSSF_{intra}$

Table 7.6.19.0.2-6: Time period for PSS/SSS detection for UE indicating *no-gap-with-interruption*, (Frequency range FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600 ms, ceil($M_{pss/sss_sync_w/o_gaps}$ x K_{FR} x $K_{layer1_measurement}$) x max (80 ms, SMTC period))$^{Note 1}$ x $CSSF_{intra}$
[DRX cycle≤ 320 ms]	max(600 ms, ceil(1.5 x $M_{pss/sss_sync_w/o_gaps}$ x K_{FR} x $K_{layer1_measurement}$) x [max(80 ms, SMTC period,DRX cycle)]) x $CSSF_{intra}$
[DRX cycle>320 ms]	[ceil($M_{pss/sss_sync_w/o_gaps}$ x K_{FR} x $K_{layer1_measurement}$) x DRX cycle] x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: K_{FR} is a scaling factor depending on the frequency range and the SSB SCS. For FR2-1, KFR = 1. NOTE 3: Requirements only apply when measurement gap is not configured, or measurement gap is fully non-overlapped with SMTC on any carrier on which UE indicates *no-gap-with-interruption*.	

Editor's note: RAN4 has to decide the UE behaviour when DRX is condifured whether interruptions are allowed.

The measurement period for intra-frequency measurements without gaps is as shown in table 7.6.19.0.3-7, 7.6.19.0.3-8 (deactivated SCell) or 7.6.19.0.3-10 (deactivated SCG applicable for PSCell). When UE *highSpeedMeasFlagFR2-r17* is configured, if SMTC $\leq$ 40ms, $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.3-9; otherwise, $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.3-7. For power class 6 UE supporting *measEnhCAInterFreqFR2-r18* when *highSpeedMeasFlagFR2-r17* is configured, the $T_{SSB_measurement_period_intra}$ is given in table 7.6.19.0.3-9 (if SMTC $\leq$ 40ms) and table 7.6.19.0.3-7 (if SMTC > 40ms) shall apply for SCC.

If the higher layer signaling in TS 38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{SSB_measurement_period_intra}$

For a UE that supports Pre-MG, an SMTC occasion is only considered to be overlapped by Pre-MG if the Pre-MG is activated.

If MCG DRX is in use, measurement period requirements for intra-frequency measurement in MCG specified table 7.6.19.0.3-7, table 7.6.19.0.3-8 shall depend on the MCG DRX cycle. If SCG DRX is in use, measurement period requirements for intra-frequency measurement in SCG specified in table 7.6.19.0.3-7, table 7.6.19.0.3-8, table

7.6.19.0.3-10, shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

For FR2, a longer measurement period is allowed, if aperiodic CSI-RS resource is measured for L1-RSRP measurement on any FR2 serving frequency in the same band, and the CSI-RS resource is outside measurement gap and overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols. If *SSB-ToMeasure* or *SS-RSSI-Measurement* is configured, the SSB symbols are indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same band which can be merged and the RSSI symbols are indicated by *SS-RSSI-Measurement*.

7.6.19.0.3 Minimum conformance requirements for Inter-frequency measurements without measurement gaps

UE satisfying the applicability conditions specified in TS 38.133 [6] clause 9.3.1 on the requirement in this clause shall be able to identify a new detectable inter-frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured) or *deriveSSB-IndexFromCellInter-r17* is configured for the FR2-1 target frequency layers and UE supporting *deriveSSB-IndexFromCellInterNon-NCSG-r17*. Otherwise UE shall be able to identify a new detectable inter-frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter-frequency SS block of an already detected cell within $T_{identify_inter_without_index}$.

- For inter-frequency SSB based measurements without measurement gaps in active BWP, it is assumed that when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR2, SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter})\ ms$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter})\ ms$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection

- For inter-frequency SSB based measurements without measurement gaps in active BWP, and UE supports *interFrequencyMeas-Nogap-r16*, T_{PSS/SSS_sync_inter} is given in table 7.6.19.0.3-1.
- For UE indicating *no-gap-no-interruption*, T_{PSS/SSS_sync_inter} is given in table 7.6.19.0.3-1 for FR2
- For UE indicating *no-gap-with-interruption*, T_{PSS/SSS_sync_inter} is given in table 7.6.19.0.3-2 for FR2.

- $T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured
  - For inter-frequency SSB based measurements without measurement gaps in active BWP, and UE supports *interFrequencyMeas-Nogap-r16*, $T_{SSB_time_index_inter}$ is given in table 7.6.19.0.3-3.
  - For UE *indicating no-gap-no-interruption*, $T_{SSB_time_index_inter}$ is given in table 7.6.19.0.3-3 for FR2
  - For UE indicating *no-gap-with-interruption*, $T_{SSB_time_index_inter}$ is given in table 7.6.19.0.3-4 for FR2.
- $T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement
  - For inter-frequency SSB based measurements without measurement gaps in active BWP, and UE supports *interFrequencyMeas-Nogap-r16*, $T_{SSB_measurement_period_inter}$ is given in table 7.6.19.0.3-5, table is configured, and UE supports *measurementEnhancementInterFreq-r17*.
  - For UE indicating *no-gap-no-interruption*, $T_{SSB_measurement_period_inter}$ is given in table table 7.6.19.0.3-5 for FR2.
  - For UE indicating *no-gap-with-interruption*, $T_{SSB_measurement_period_inter}$ is given in table 7.6.19.0.3-6 for FR2.
- For UE supporting power class 6 and *measEnhCAInterFreqFR2-r18* with *highSpeedMeasFlagFR2-r17* configured, if SMTC $\leq$ 40ms, $T_{SSB_measurement_period_inter}$ is given in table 9.3.9.2-x; otherwise, $T_{SSB_measurement_period_inter}$ is given in table 7.6.19.0.3-5.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in TS 38.133 [6] clause 9.1.5.1 for measurement conducted outside GAP, i.e. when inter-frequency SMTC is fully non overlapping or partially overlapping with GAPs.

- when inter-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps for UE *indicating no-gap-no-interruption* or
- when inter-frequency SMTC is fully non overlapping with measurement gaps for UE indicating *no-gap-with-interruption*.

For inter-frequency SSB based measurements without measurement gaps in active BWP

M_{pss/sss_sync_inter}: For a UE supporting FR2-1 power class 1 or 5, M_{pss/sss_sync_inter} = 40. For a UE supporting FR2-1 power class 2, M_{pss/sss_sync_inter} = 24. For a UE supporting FR2-1 power class 3, M_{pss/sss_sync_inter} = 24. For a UE supporting FR2-1 power class 4, M_{pss/sss_sync} = 24. For a UE supporting FR2-2 power class 1, M_{pss/sss_sync_inter} = 60. For a UE supporting FR2-2 power class 2, M_{pss/sss_sync_inter} = 36. For a UE supporting FR2-2 power class 3, M_{pss/sss_sync_inter} = 36.

$M_{SSB_index_inter}$: For a UE supporting FR2-2 power class 1, $M_{SSB_index_inter}$ = 72. For a UE supporting FR2-2 power class 2, $M_{SSB_index_inter}$ = 48. For a UE supporting FR2-2 power class 3, $M_{SSB_index_inter}$ = 48.

$M_{meas_period_inter}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_inter}$ = 40. For a vehicle mounted UE supporting FR2-1 power class 2, M_{pss/sss_sync_inter}=24. For a UE supporting FR2-1 power class 3, $M_{meas_period_inter}$ = 24. For a UE supporting FR2-1 power class 4, $M_{meas_period_inter}$ = 24. For a UE supporting FR2-2 power class 1, $M_{meas_period_inter}$ = 60. For a UE supporting FR2-2 power class 2, M_{pss/sss_sync_inter} = 36. For a UE supporting FR2-2 power class 3, $M_{meas_period_inter}$ = 36.

If the UE indicates 'nogap-noncsg' via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement or the UE indicates either *no-gap-with-interruption* or *no-gap-no-interruption* via *NeedForInterruptionInfoNR-r18*,

M_{pss/sss_sync_inter}: For a UE supporting FR2-1 power class 1 or 5, M_{pss/sss_sync_inter} = 64 samples. For a UE supporting FR2-1 power class 2, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2-1 power class 3, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2-1 power class 4, M_{pss/sss_sync_inter} = 40 samples. For a UE supporting FR2-2 power class 1, M_{pss/sss_sync_inter} = 96. For a UE supporting FR2-2 power class 2, M_{pss/sss_sync_inter} = 60. For a UE supporting FR2-2 power class 3, M_{pss/sss_sync_inter} = 60.

$M_{SSB_index_inter}$: For a UE supporting FR2-1 power class 1 or 5, $M_{SSB_index_inter}$ = 40 samples. For a UE supporting FR2 power class 2, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2-1 power class 3, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2-1 power class 4, $M_{SSB_index_inter}$ = 24 samples. For a UE supporting FR2-2 power class 2 or 3, $M_{SSB_index_inter}$ = 48 samples. For a UE supporting FR2 power class 1, $M_{SSB_index_inter}$ = 72 samples.

$M_{meas_period_inter}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_inter}$ =64. For a UE supporting FR2-1 power class 2, $M_{meas_period_inter}$=40. For a UE supporting FR2-1 power class 3, $M_{meas_period_inter}$ =40. For a UE supporting FR2-1 power class 4, $M_{meas_period_inter}$ = 40. For a UE supporting FR2-2 power class 1, $M_{meas_period_inter}$ = 96. For a UE supporting FR2-2 power class 2, $M_{meas_period_inter}$ = 60. For a UE supporting FR2-2 power class 3, $M_{meas_period_inter}$ = 60.

When UE supports *concurrentMeasGap-r17* or *musim-GapPreference-r17* or both concurrent measurement GAP and *musim-GapPreference-r17* and the UE is configured with concurrent GAPs or periodic MUSIM gaps or both concurrent gaps and periodic MUSIM gaps,

K_p is a scaling factor for an SSB frequency layer to be measured without GAP. $K_p = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

For a window W of duration max(SMTC period, xRP_max), where xRP_max is the maximum xRP across all configured per-UE GAPs, periodic MUSIM gaps, and per-FR GAPs within the same FR as the SSB frequency layer, and starting at the beginning of any SMTC occasion:

N_{total} is the total number of SMTC occasions within the window, including those overlapped with GAP and MUSIM gap occasions within the window, and

$N_{available}$ is the number of SMTC occasions that are not overlapped with any non-dropped GAP or non-dropped MUSIM gap occasions within the window W, after accounting for GAP and MUSIM gap collisions by applying the collision rules for the measurement GAP and MUSIM gap in clauses 9.1.8.3, 9.1.10.4 and 9.1.10.5, respectively.

- xRP = MGRP when configured GAP is activated Pre-MG or MG, and xRP = VIRP when configured GAP is NCSG, also xRP = MGRP for periodic MUSIM gap.

K_p = 1 when $N_{available}$ = 0.

Requirements in this clause do not apply when $N_{available}$ = 0 due to fully overlapping between SMTC occasions and MUSIM gap occasions within the window W.

Editor Note: FSS for the case when $N_{available}$ = 0 due to fully overlapping between SMTC occasions and the union of MUSIM gap and measurement gap occasions within the window W.

When UE supports [*musim-GapPreference-r17]* and the SMTC occasions of the target frequency layer is fully or partially overlapping with the configured aperiodic MUSIM gap, longer cell identification period for the target frequency layer is expected.

Otherwise, when UE is not configured with or UE does not support concurrent GAPs and the UE is not configured with MUSIM gaps:

When inter-frequency SMTC is fully non overlapping with measurement gaps or NCSG, or interfrequency SMTC is fully overlapping with MGs or NCSG, K_p =1.

When inter-frequency SMTC is partially overlapping with measurement gaps, K_p = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP. When inter-frequency SMTC is partially overlapping with NCSG, K_p = 1/(1- (SMTC period /VIRP)), where SMTC period < VIRP.

For FR2,

$K_{layer1_measurement}$=1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by inter-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by inter-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by *SSB-ToMeasure* and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

For calculation of K_p, if the high layer signalling (TS 38.331 [2]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*.

Table 7.6.19.0.3-1: Time period for PSS/SSS detection, (FR2)

DRX cycle	T_{PSS/SSS_sync_inter}
No DRX	$\max(600\text{ ms}, \text{ceil}(M_{pss/sss_sync_inter} \times K_p \times K_{layer1_measurement}) \times \text{SMTC period})^{Note\ 1} \times CSSF_{inter}$
DRX cycle≤ 320 ms	$\max(600\text{ ms}, \text{ceil}(1.5 \times M_{pss/sss_sync_inter} \times K_p \times K_{layer1_measurement}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter}$
DRX cycle>320 ms	$\text{ceil}(M_{pss/sss_sync_inter} \times K_p \times K_{layer1_measurement}) \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: Void	

Table 7.6.19.0.3-2: Time period for PSS/SSS detection, when UE indicate no-gap-with-interruption (FR2)

DRX cycle	T_{PSS/SSS_sync_inter}
No DRX	max(600 ms, ceil(M_{pss/sss_sync_inter} x $K_{layer1_measurement}$) x max(80 ms, SMTC period))[Note 1] x $CSSF_{inter}$
DRX cycle≤ 320 ms	max(600ms, ceil(1.5 x M_{pss/sss_sync_inter} x $K_{layer1_measurement}$) x max(80ms, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle>320 ms	ceil(M_{pss/sss_sync_inter} x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: Void	

Table 7.6.19.0.3-3: Time period for time index detection (FR2)

Condition [NOTE1,2]	$T_{SSB_time_index_inter}$
No DRX	Max(200 ms, Ceil($M_{SSB_index_inter}$ x K_p) × SMTC period) × $CSSF_{inter}$
DRX cycle ≤ 320 ms	Max(200 ms, Ceil(1.5 × $M_{SSB_index_inter}$ x K_p) × Max(SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320 ms	Ceil($M_{SSB_index_inter}$ x K_p) × DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: Kp is applicable for UE supporting *concurrentMeasGap-r17*	

Table 7.6.19.0.3-4: ime period for time index detection, when UE indicate *no-gap-with-interruption* (FR2)

Condition [NOTE1,2]	$T_{SSB_time_index_inter}$
No DRX	Max(200 ms, $M_{SSB_index_inter}$ × max(80 ms, SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 320 ms	Max(200 ms, Ceil(1.5 × $M_{SSB_index_inter}$) × Max(80 ms, SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320 ms	$M_{SSB_index_inter}$ × DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: Kp is applicable for UE supporting [concurrent gaps] and MUSIM gaps	

The UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 7.6.19.0.3-5, if UE supports inter-frequency measurement without measurement gaps.

Table 7.6.19.0.3-5: Measurement period for inter-frequency measurements without gaps (FR2)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(400 ms, ceil($M_{meas_period_inter}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{inter}$
DRX cycle≤ 320 ms	max(400 ms, ceil(1.5x $M_{meas_period_inter}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{inter}$
DRX cycle>320 ms	ceil($M_{meas_period_inter}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 7.6.19.0.3-6: Measurement period for inter-frequency measurements without gaps when UE indicate no-gap-with-interruption (FR2)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(400 ms, ceil($M_{meas_period_inter}$ x $K_{layer1_measurement}$) x max(80 ms, SMTC period))[Note 1] x $CSSF_{inter}$
DRX cycle≤ 320 ms	max(400 ms, ceil(1.5x $M_{meas_period_inter}$ x $K_{layer1_measurement}$) x max(80 ms, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle>320 ms	ceil($M_{meas_period_inter}$ x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 7.6.19.0.3-7: Measurement period for intra-frequency measurements without gaps (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400 ms, ceil($M_{meas_period_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320 ms	max(400 ms, ceil(1.5x $M_{meas_period_w/o_gaps}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320 ms	ceil($M_{meas_period_w/o_gaps}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 7.6.19.0.3-8: Measurement period for intra-frequency measurements without gaps (deactivated SCell) (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320 ms	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320 ms	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: The requirements also apply to deactivated SCG SCell.	

Table 7.6.19.0.3-9: Measurement period for intra-frequency measurements without gaps when *highSpeedMeasFlagFR2-r17* is configured (FR2) when SMTC period <= 40 ms

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400 ms, ceil(M1[Note 2] x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 80 ms	max(400 ms, ceil(M1[Note 2] x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
80 ms< DRX cycle≤ 320 ms	ceil(1.5 x $M_{meas_period_w/o_gaps}$ [Note 3] x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle) x $CSSF_{intra}$
DRX cycle>320 ms	ceil($M_{meas_period_w/o_gaps}$ [Note 3] xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: For UE supporting power class 6, M1 = 6 if *highSpeedMeasFlagFR2-r17* = set1 or M1 = 18 if *highSpeedMeasFlagFR2-r17* = set2	

Table 7.6.19.0.3-10: Measurement period for intra-frequency measurements without gaps (deactivated SCG applicable for PSCell) (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x measCyclePSCell x $CSSF_{intra}$
DRX cycle≤ 320 ms	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x max(measCyclePSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320 ms	Ceil($M_{meas_period_w/o_gaps}$ x K_p) x max(measCyclePSCell, DRX cycle) x $CSSF_{intra}$

Table 7.6.19.0.3-11: Measurement period for intra-frequency measurements without gaps for UE indicating *no-gap-with-interruption* (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(400 ms, ceil($M_{meas_period_w/o_gaps}$ x $K_{layer1_measurement}$) x (80 ms, SMTC period))[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320 ms	max(400 ms, ceil(1.5x $M_{meas_period_w/o_gaps}$ x $K_{layer1_measurement}$) x [max(80, SMTC period,DRX cycle)]) x $CSSF_{intra}$
DRX cycle>320 ms	ceil($M_{meas_period_w/o_gaps}$ x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: Requirements only apply when measurement gap is not configured, or measurement gap is fully non-overlapped with SMTC on any carrier on which UE indicates *no-gap-with-interruption* via *NeedForInterruptionInfoNR-r18*.	

Editor's note: RAN4 has to decide the UE behavior when DRX is configured whether interruptions are allowed.

SA event triggered reporting tests with NeedForGap in FR2.

7.6.19.1 NR SA FR2 event-triggered reporting without interruption outside gap

Editor's Note: This test case is incomplete in following aspects:

TT analysis is missing.

Test applicability is missing in 38.522

Message contents are FFS

Test procedure is missing

7.6.19.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. The test partly verifies the TDD intra-frequency cell search and measurement requirements in TS 38.133 [6] clause 9.2.6.1 and 9.2.6.2. This test also verifies that the UE does not cause interruption outside measurement gap when SMTC occasions overlap with measurement gap occassions.

7.6.19.1.2 Test applicability

This test applies to all types of NR UE from release 18 onwards.

The UE which passes this test can skip the corresponding Rel-15 test cases.

7.6.19.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.19.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.19 .1.

7.6.19.1.4 Test description

In the test the UE is configured to perform measurements on the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The UE operates in an active BWP which does not contain cell-defined SSB so that the UE uses configured measurement gaps to measure on the intra-frequency target SSB.

The TE schedules continuous DL data on PCell throughout the test.

Figure 7.6.19.1.4-1 shows the Time multiplexed downlink transmissions from each Angle of Arrival.

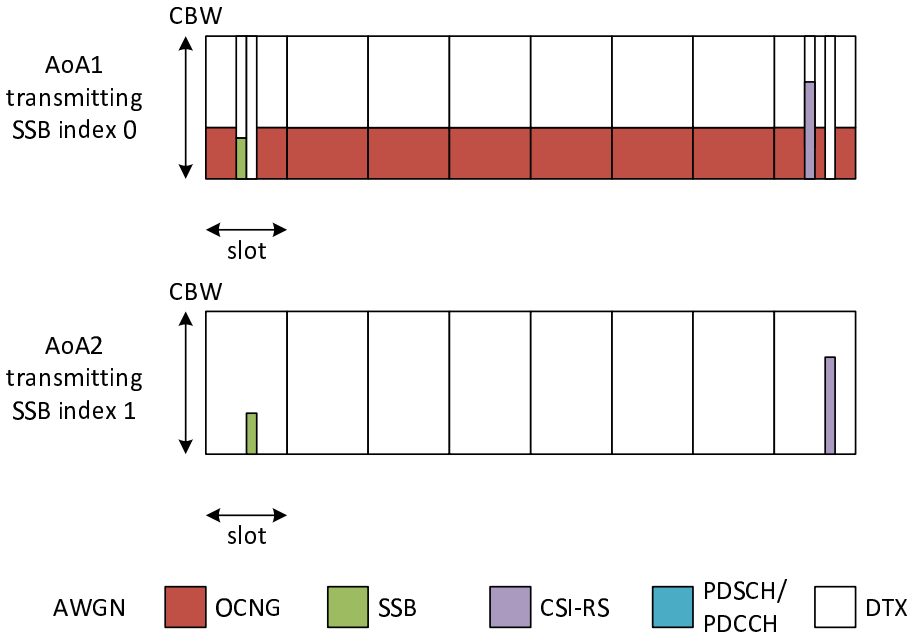

Figure 7.6.19.1.4-1: Time multiplexed downlink transmissions (Config 1 example)

7.6.19.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.19.1.4.1-1

Table 7.6.19.1.4.1-1: Supported test configurations

Configuration	Description
7.6.19.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Test environment parameters are given in Table 7.6.19.1.4.1-2.

Table 7.6.19.1.4.1-2: Initial conditions for for intra-frequency event triggered reporting for SA with TDD PCell in FR2

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.19.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.6.19.1.4.1-3.
2. Message contents are defined in clause 7.6.19.1.4.3.
3. Two cells are deployed in the test, a FR2 PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The serving frequency selected for this test case should be one in which the UE reports *NeedForGapsInfoNR-r16* = ‘nop-gap’ and *NeedForInterruptionInfoNR-r18* = ‘no-gap-with-interruption’ for the PCell.

Table 7.6.19.1.4.1-3: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2

Parameter	Unit	Config	Value	Comment
Active cell		1	PCell (Cell 1)	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1	SMTC.1	20 ms SMTC periodicity
Measurement gap pattern		1	13	Half of the SMTC occasions are overlapped in MG.
Measurement gap offset		1	39	
A3-Offset	dB	1	-11	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	
Time offset between Cell 1 and Cell 2		1	3 μs	Synchronous cells
T1	s	1	5	
T2	s	1	5	

7.6.19.1.4.2 Test procedure

FFS

7.6.19.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

FFS

7.6.19.1.5 Test requirements

Table 7.6.19.1.4.1-3, 7.6.19.1.5-1, and Table 7.6.19.1.5-2 defines the primary level settings for all tests.

Table 7.6.19.1.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{PRB,c}$ = 66		100: $N_{PRB,c}$ = 66	
Data PRBs allocated		1	24		24	
Intial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1	CSI-RS		N/A	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
TRS configuration		1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1	120		120	
OCNG Patterns		1	OP.5		N/A	
cellIndividualOffset	dB	1	N/A		16	
CD-SSB		1	SSB.1 FR2		SSB.7 FR2	

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
Propagation Condition		1	AWGN		AWGN	

Table 7.6.19.1.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption[Note 4]		1	Rough		Rough	
E_s	dBm/SCS	1	-89	-89	-Infinity	-89
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
Io	dBm/95.04 MHz	1	-64.41	-64.41	-Infinity	-64.41
Time multiplexing of the downlink transmissions from each AoA		1	Defined in figure A.7.6.19.1.1-1			

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Void
NOTE 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Information about types of UE beam is given in clause B.2.1.3, and does not limit UE implementation or test system implementation
NOTE 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1 dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3200 ms for a UE supporting power class 1 and 5,
- 1920 ms for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90 % with the confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

UE shall report corresponding HARQ-ACK/NACK for those PDSCHs scheduled in the slots that are not overlapped with the measurement gap. UE is not allowed to cause any interruption outside the configured measurement gap occasions.

7.6.19.2 NR SA FR2 SA event triggered reporting test without gap without interruption

Editor's Note: This test case is incomplete in following aspects:

TT analysis is missing.

Test applicability is missing in 38.522

Message contents are FFS

Test procedure is missing

7.6.19.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 [6] clause 9.2.5.1 and 9.2.5.2.

7.6.19.2.2 Test applicability

This test applies to all types of NR UE from release 18 onwards supporting TBD.

7.6.19.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.19.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.19 .1.

7.6.19.2.4 Test description

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The TE schedules continuous DL data on PCell throughout the test.

Figure 7.6.19.2.4-1 shows the Time multiplexed downlink transmissions from each Angle of Arrival.

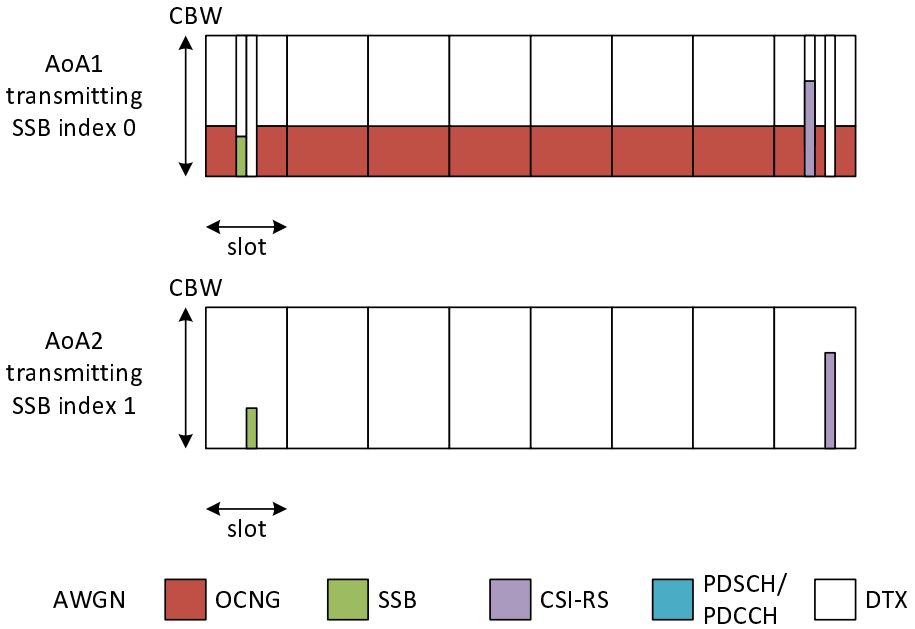

Figure 7.6.19.2.4-1: Time multiplexed downlink transmissions (Config 1 example)

7.6.19.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.19.2.4.1-1

Table 7.6.19.2.4.1-1: Supported test configurations

Configuration	Description
7.6.19.2-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.6.19.2-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Test environment parameters are given in Table 7.6.19.2.4.1-2.

Table 7.6.19.2.4.1-2: Initial conditions for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.19.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.6.19.2.4.1-3.
2. Message contents are defined in clause 7.6.19.2.4.3.
3. Two cells are deployed in the test. PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

Table 7.6.19.2.4.1-3: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1	
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD resource #0	Resource #1 is not used
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

7.6.19.2.4.2 Test procedure

FFS

7.6.19.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

FFS

7.6.19.2.5 Test requirements

Table 7.6.19.2.4.1-3, 7.6.19.2.5-1, and Table 7.6.19.2.5-2 defines the primary level settings for all tests.

Table 7.6.19.2.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{PRB,c}$ = 66		100: $N_{PRB,c}$ = 66	
Data PRBs allocated		1	24		24	
		2	48		48	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2	CCR.3.7 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120		120	
OCNG Patterns		1, 2	OP.5		N/A	
cellIndividualOffset	dB	1~2	N/A		16	
SSB		1	SSB.1 FR2		SSB.7 FR2	
		2	SSB.2 FR2		SSB.8 FR2	
Propagation Condition		1, 2	AWGN		AWGN	

Table 7.6.19.2.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption[Note 4]		1,2	Rough		Rough	
E_s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
Io	dBm/95.04 MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in figure A.7.6.19.2.1-1			

NOTE 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
NOTE 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: Information about types of UE beam is given in clause B.2.1.3, and does not limit UE implementation or test system implementation.
NOTE 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1 dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 1.6 s for a UE supporting power class 1 and 5,

- 1.08 s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90 % with the confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

UE shall report corresponding HARQ-ACK/NACK for all PDSCHs scheduled during the test.

7.6.19.3 NR SA FR2 event triggered reporting test without gap without interruption under non-DRX

Editor's Note: This test case is incomplete in following aspects:

TT analysis is missing.

Test applicability is missing in 38.522

Message contents are FFS

Test procedure is missing

7.6.19.3.1 Test purpose

The purpose of this test is to verify that if UE reports "*no-gap*" via *interFreq-needForGap-r16* and reports "*no-gap-no-interruption*" via *interFreq-needForInterruption-r18*, the UE makes correct reporting of an event. The test will partly verify the inter-frequency without gap cell search requirements in TS 133 [6] clause 9.3.9.

7.6.19.3.2 Test applicability

This test applies to all types of NR UE from release 18 onwards supporting inter-frequency measurements without gap.

7.6.19.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.19.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.19.3.

7.6.19.3.4 Test description

7.6.19.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.19.3.4.1-1

Table 7.6.19.3.4.1-1: Supported test configurations

Configuration	Description
7.6.19.3-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Test environment parameters are given in Table 7.6.19.3.4.1-2.

Table 7.6.19.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.19.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.

Connection Diagram	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 7.6.19.3.4.1-3.
2. Message contents are defined in clause 7.6.19.3.4.3.
3. Two cells are deployed in the test. NR cell 1 as PCell in FR2 on NR RF channel 1 and NR Cell 2 as neighbour cell in FR2 on NR RF channel 2.

Table 7.6.19.3.4.1-3: General test parameters for inter-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without interruption

Parameter	Unit	Config	Value	Comment
Active cell		1	PCell (Cell 1)	NR Cell 1 is on NR RF channel number 1
Neighbour cell		1	Cell 2	NR cell 2 is on NR RF channel number 2
RF Channel Number		1	1, 2	Two FR2 NR carrier frequencies are used
SMTC configuration		1	SMTC.1	
A3-Offset	dB	1	-6	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	
Time offset between Cell 1 and Cell 2		1	3 μs	Synchronous cells
T1	s	1	5	
T2	s	1	5	

7.6.19.3.4.2 Test procedure

TBD

7.6.19.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

TBD

7.6.19.3.5 Test requirements

Table 7.6.19.3.4.1-3, 7.6.19.3.5-1, and Table 7.6.19.3.5-2 defines the primary level settings for all tests.

Table 7.6.19.3.5-1: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Intial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		-	
Active DL BWP configuration		1	DLBWP.1.1		-	
Active UL BWP configuration		1	ULBWP.1.1		-	
RLM-RS		1	SSB		SSB	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	

RMSI CORESET RMC configuration		1	CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	CCR.3.1 TDD
TRS configuration		1	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1	TCI.State.2	N/A
OCNG Patterns		1	OP.1	OP.1
SSB		1	SSB.3 FR2	SSB.3 FR2
Propagation Condition		1	AWGN	

Table 7.6.19.3.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1			
Beam assumption[Note 4]		1	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	1	4	4	-Infinity	8
N_{oc} Note 2	dBm/15 KHz	1	-102			
N_{oc} Note 2	dBm/SCS	1	-93			
SS-RSRP	dBm/SCS	1	-89	-89	-Infinity	-85
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	8
Io	dBm/95.04MHz	1	-58.56		-55.38	

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in annex B.2.1.3, and does not limit UE implementation or test system implementation

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1,
- 1.44s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

During the T1 and T2, UE shall be able to report ACK/NACK for all slots with PDCCH/PDSCH on PCell excluding those symbles as defined in clause 9.3.9.4.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

7.6.20 LTM Intra-frequency L1-RSRP measurement

7.6.20.0 Minimum conformance requirements

7.6.20.0.1 Minimum conformance requirements for SSB-based intra-frequency L1-RSRP measurement

If a neighbor cell is known according to TS 38.133 [6] clause 9.14.2, the UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ if *deriveSSB-IndexFromCell* is enabled or UE has reported SSB index in L3 measurement report of the same cell. Otherwise, UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}+T_{SSB_time_index_intra}$, where $T_{SSB_time_index_intra}$ is the time period used to acquire the index of the SSB being measured given in TS 38.133 [6] clause 9.2.5.1.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ is defined for FR2 in Table 7.6.20.0.1-1 for UE incapable of *multiCellL1-measRTD-greaterThan-CP-r18* and in Table 7.6.20.0.1-2 for UE capable of *multiCellL1-measRTD-greaterThan-CP-r18*, where

- M = 1
- N = 8
- P value for SSB resource to be measured is defined as
  - $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ in FR2 with $N_{available} = 0$
  - $N_{total} / N_{available}$ in FR2 with $N_{available} > 0$

  For a window W of duration max (T_{L1}, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any SSB resource occasion:

  - N_{total} is the total number of SSB resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
  - T_{L1} is periodicity of the target SSB.
  - $P_{sharing\ factor}$ = 1, if the SSB configured for L1-RSRP measurement outside measurement gap is
    - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
    - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,
  - $P_{sharing\ factor}$ = 3, otherwise.
- $P_{L1_sharing}$ is defined as
  - When number of neighboring cells configured with SSB based L1-RSRP measurement is 1
    - $P_{L1_sharing}$ = 2, if any symbol of the SSBs from serving cell and neighbor cell are overlapping or adjacent (in time domain)
    - $P_{L1_sharing}$ = 1, otherwise

- When number of neighboring cells configured with SSB based L1-RSRP measurement is more than 1
  - When none of TCI state(s) of the intra-frequency neighbor cells or inter-frequency neighbor cells without gap are not in the active TCI state list
    - $P_{L1_sharing} = 3*N_{Neighbor_Cell}$, where $N_{Neighbor_Cell}$ is the number of neighbor cells (to measure on intra-frequency and inter-frequency without gap) whose TCI state(s) are not in the active TCI state list
  - Otherwise
    - $P_{L1_sharing} = 3*N_{Neighbor_Cell_in_list}$, where $N_{Neighbor_Cell_in_list}$ is the number of neigbour cells (including intra-frequency neighbor cells and inter-frequency without gap neighbor cells) whose TCI state(s) are in the active TCI state list. No requirements are defined for any other cell(s) whose TCI state(s) is not in the active TCI state list.

If the high layer in TS 38.331 [6] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer measurement period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet previous conditions.

Longer measurement period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 7.6.20.0.1-1: Intra-frequency L1-RSRP measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ in FR2 for UE incapable of *multiCellL1-measRTD-greaterThan-CP-r18*

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*P_{L1_sharing}*N)*T_{SSB_NBC})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*P_{L1_sharing}*N)*\max(T_{DRX},T_{SSB_NBC}))$
DRX cycle > 320ms	$\text{ceil}(1.5*M*P*P_{L1_sharing}*N)*T_{DRX}$
Note 1: T_{SSB_NBC} is the periodicity of the neighbor cell SSB-Index configured for intra-frequency L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: The requirements apply when the max RTD between the serving cell and any candidate cell on which UE is required to perform L1-RSRP measurement on the same frequency layer is not larger than CP length of the cell on the frequency layer. Note 3: When the number of neighbor cells to be measured on intra-frequency and inter-frequency without gap is more than 1 and TCI state(s) of at least one of these neighbor cells is in the active TCI state list, the requirements apply only to the cell(s) that have TCI state(s) is in the active TCI state list.	

Table 7.6.20.0.1-2: Intra-frequency L1-RSRP measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ in FR2 for UE capable of *multiCellL1-measRTD-greaterThan-CP-r18*

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_intra}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*P_{L1_sharing}*N)*T_{SSB_NBC})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*P_{L1_sharing}*N)*\max(T_{DRX},T_{SSB_NBC}))$
DRX cycle > 320ms	$\text{ceil}(1.5*M*P*P_{L1_sharing}*N)*T_{DRX}$
Note 1: T_{SSB_NBC} is the periodicity of the neighbor cell SSB-Index configured for intra-frequency L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: When the number of neighbor cells to be measured on intra-frequency and inter-frequency without gap is more than 1 and TCI state(s) of at least one of these neighbor cells is in the active TCI state list, the requirements apply only to the cell(s) that have TCI state(s) is in the active TCI state list.	

The normative reference for this requirement is TS 38.133 [6] clauses 9.14.3.1, 9.14.5, 9.14.6 and 9.14.7.

7.6.20.1 NR SA FR2 Intra-frequency SSB based L1-RSRP measurement

Editor's Note: This test case is incomplete in following aspects:

- LTM specific configurations are missing.

- Test applicability is FFS.

- TT analysis is missing.

- Test parameters contain [ ].

7.6.20.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of SSB based intra-frequency L1-RSRP measurement on neighbor cell in FR2 within L1-RSRP measurement requirements specified in TS 38.133 [6] clause 9.14.

7.6.20.1.2 Test applicability

This test applies to all types of NR UEs supporting intra-frequency L1 measurement and reports for LTM from release 18 and forward. Test 2 is applicable only to UEs supporting *multiCellL1-measRTD-greaterThan-CP-r18*, otherwise Test 1 is applicable.

7.6.20.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.20.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.20.1.

7.6.20.1.4 Test description

7.6.20.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.20.1.4.1-1.

Table 7.6.20.1.4.1-1: Supported test configurations

Test Case ID	Description
7.6.20.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.6.20.1-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Test environment parameters are given in Table 7.6.20.1.4.1-2.

Table 7.6.20.1.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.20.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	Without LTE link		

1. The general test parameter settings are set up according to Table 7.6.20.1.4.1-3.

2. Message contents are defined in clause 7.6.20.1.4.3.

3. There are one NR carrier and two cells specified in the tests. Cell 1 (Pcell) is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test. Cell 2 (intra neighbour cell) is on the same frequency as the Cell 1.

4. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX beam peak direction has been obtained previously using one of the search procedures as described in Annex I.

Table 7.6.20.1.4.1-3: General test parameters

Parameter		Unit	Value		Comment
			Test 1	Test 2	
Active cell			Cell 1		
Neighbouring cell			Cell 2		Cell 2 is the candidate cell
A3-Offset		dB	[-15]		
Hysteresis		dB	0		
Time To Trigger		ms	0		
Filter coefficient			0		L3 filtering is not used
DRX			OFF		DRX is not used
Time offset between cells			0.2μs	2μs	The timing of Cell 2 is later than the timing of Cell 1
deriveSSB-IndexFromCell			Enabled		
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	320		Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1		Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1		
	spCellInclusion		N/A		
ltm-ConfigComplete			True		Candidate cell's configuration is complete configuration
T1		s	1.5		
T2		s	≤ 2		

7.6.20.1.4.2 Test procedure

There are two tests in the test case, test 1 and test 2:

- In test 1, time offset between cells is within CP length.

- In test 2, time offset between cells is larger than CP length.

If a UE does not support *multiCellL1-measRTD-greaterThan-CP-r18*, it is only required to pass test 1. Otherwise, it is only required to pass test 2.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. SSB_RP of Cell 2 in T1 and T2 are different. No gap patterns are configured in the test case.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.6.20.1.5-1.

3. SS shall transmit *RRCReconfiguration* message to configure Event A3 triggered measurement report.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. The UE shall transmit *MeasurementReport* message triggered by Event A3 including Cell 2 measurement report with SSB index.

6. SS shall transmit *RRCReconfiguration* message to configure *LTM-Candidate-r18* for Cell 2. UE is configured with SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports for candidate Cell 2 in PUCCH format 2.

7. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

8. The UE shall transmit L1-RSRP on PUCCH format 2 in Cell 1 with a periodicity of 320 slots.

9. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.20.1.5-1. T2 starts at the beginning of a frame with an odd SFN.

10. The UE shall continue to send valid L1-RSRP reports. The SS shall check the following requirements:

    -R1: the UE shall start to transmit valid reports no later than 1000 ms from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement (Table 7.6.20.1.5-3 for test configuration 1 and Table 7.6.20.1.5-4 for test configuration 2). For candidate Cell 2, the reported L1-RSRP value in T2 shall be larger than the value reported in T1. If the first valid report is received earlier than the specified time, and includes a larger L1-RSRP value of Cell 2, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

    -R2: the UE shall transmit reports every 320 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

    -R3: the L1-RSRP value of Cell 2 reported by the UE is compared to the expected L1-RSRP value. In all consecutive reports after the first valid value is received, if the reported value is outside the limits in Table 7.6.20.1.5-3 for test configuration 1 and in Table 7.6.20.1.5-4 for test configuration 2, or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

11. The SS waits until T2 expires.

12. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

13. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

14. After the RRC connection release, the SS:

    - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),

    OR

    - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

15. Repeat steps 2-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.20.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 7.6.20.1.4.3-1: Common Exception messages (step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-5 with condition SSB Index Table H.3.1-7 with conditions INTRA-FREQ and SSB Index
Specific message contents exceptions for Cell 2	Table H.3.1-3 with conditions INTRA-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.6.20.1.4.3-2: ReportConfigNR (a3-Offset) (step 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A3			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	[-30]	The actual value is field value * 0.5 dB	
}			
hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
maxReportCells	1		
reportQuantityRS-Indexes SEQUENCE {			
rsrp	true		
rsrq	false		
sinr	false		
}			
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	true		
}			
}			
}			

Table 7.6.20.1.4.3-3: Common Exception messages (step 6)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.12-1 with condition L1-RSRP Table H.3.12-2 with condition L1-RSRP Table H.3.12-3 Table H.3.12-4 Table H.3.12-5 with condition [TBD] Table H.3.12-6 Table H.3.12-8
Specific message contents exceptiosn for Test Configuration 1	Table H.3.12-9 with conditions FR2 and SSB#1
Specific message contents exceptiosn for Test Configuration 2	Table H.3.12-9 with conditions FR2 and SSB#0

7.6.20.1.5 Test requirement

Table 7.6.20.1.5-1 and Table 7.6.20.1.5-2 define the primary level settings including test tolerances for all tests.

Table 7.6.20.1.5-1: Cell specific test parameters

Parameter	**Config**	**Unit**	**Cell 1**		**Cell 2**	
			T1	**T2**	**T1**	**T2**
SSB GSCN	1~2		Freq1			
Duplex mode	1~2		TDD			
TDD Configuration	1~2		TDDConf.3.1			
$BW_{channel}$	1~2	MHz	100: $N_{PRB,c}$ = 66			
Data RBs allocated	1~2		66			
PDSCH/PDCCH subcarrier spacing	1~2	KHz	120			
PUCCH/PUSCH subcarrier spacing	1~2	KHz	120			
PDSCH Reference measurement channel	1		SR.3.2 TDD		N/A	
	2		SR.3.3 TDD		N/A	
RMSI CORESET Reference Channel	1		CR.3.1 TDD		N/A	

	2		CR.3.2 TDD	N/A
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	N/A
	2		CCR.3.7 TDD	N/A
SSB configuration	1		SSB.3 FR2	SSB.7 FR2
	2		SSB.8 FR2	SSB.4 FR2
OCNG Patterns	1~2		OP.4	N/A
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3	
SMTC configuration	1~2		SMTC.1	
TRS Configuration	1~2		TRS.2.1 TDD	N/A
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2	N/A
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS[Note 1]				
EPRE ratio of OCNG to OCNG DMRS[Note 1]				
Propagation condition	1~2		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table 7.6.20.1.5-2: NR OTA cell specific test parameters

Parameter	Config	Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Angle of arrival configuration	1~2		Setup 1 according to A.9.1			
Beam Assumption[Note 4]	1~2		Rough		Rough	
$\hat{E}s/Iot_{BB}$[Note 5]	1~2	dB	-1.5+TT	16.5+TT	-1.5+TT	16.5+TT
SSB_RP[Note 3]	1	dBm/SSB SCS	-103+TT	-85+TT	-103+TT	-85+TT
	2		-100+TT	-82+TT	-100+TT	-82+TT
Io[Note 3]	1	dBm/95.04MHz	-74+TT	-56+TT	-74+TT	-56+TT
	2		-74+TT	-56+TT	-74+TT	-56+TT
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.						
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [3] Table 6.2.1.3-4.						

The UE shall send L1-RSRP report every 320 slots in T2. The UE shall start to report a larger L1-RSRP value of Cell 2 in no later than 960 ms plus 320 slots from the beginning of time period T2. During T2, each L1-RSRP measurement report of Cell 2 shall meet the corresponding absolute accuracy requirement in Table 7.6.20.1.5-3 for test configuration 1, and the corresponding absolute accuracy requirements in Table 7.6.20.1.5-4 for test configuration 2.

Table 7.6.20.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 1

Normal Conditions	T2
Lowest reported value (Cell 2)	TBD
Highest reported value (Cell 2)	TBD

Table 7.6.20.1.5-4: L1-RSRP absolute accuracy requirements for the reported values for test configuration 2

Normal Conditions	T2
Lowest reported value (Cell 2)	TBD
Highest reported value (Cell 2)	TBD

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.6.21 LTM Inter-frequency L1-RSRP measurement with measurement gap

7.6.21.0 Minimum conformance requirements

7.6.21.0.1 Minimum conformance requirements for SSB-based inter-frequency L1-RSRP measurement with gap

If an inter-frequency neighbor cell is known according to TS 38.133 [6] clause 9.15.2, the UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_Inter}$ if *deriveSSB-IndexFromCellInter-r17* is enabled or UE has reported SSB index in L3 measurement report of the same cell. Otherwise, UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_inter}+T_{SSB_time_index_inter}$, where $T_{SSB_time_index_inter}$ is the time period used to acquire the index of the SSB being measured given in TS 38.133 [6] clause 9.3.4.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_inter}$ is defined in Table 7.6.21.0.1-1 for FR2, where

- M = 2
- N = 8
- $CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap}$ in TS 38.133 [6] clause 9.1.5.4 for L1-RSRP measurement conducted within measurement gaps.

Table 7.6.21.0.1-1: Inter-frequency L1-RSRP measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_Inter}$ for known cells in FR2

Condition	$T_{L1\text{-}RSRP_Measurement_Period_SSB_Inter}$
No DRX	$Max(T_{report}, Ceil(K_{gap} \times M*N) \times Max(MGRP, SSB\ period)) \times CSSF_{inter}$
DRX cycle ≤ 320ms	$Max(T_{report}, Ceil(1.5 * K_{gap} \times M*N) \times Max(MGRP, SSB\ period, DRX\ cycle)) \times CSSF_{inter}$
DRX cycle > 320ms	$Ceil(K_{gap} \times M*N) \times DRX\ cycle \times CSSF_{inter}$
Note 1: The definition of K_{gap} is the same as L3 measurement which is a scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. Note 2: If the UE is incapable of *multiCellL1-measRTD-greaterThan-CP-r18*, the requirements apply for the cells configured by *LTM-CSI-ResourceConfig-r18* on which UE is required to perform L1 measurements, when the max RTD among the cells on the same inter-frequency layer is not larger than CP length.	

The normative reference for this requirement is TS 38.133 [6] clauses 9.15.3.1 and 9.15.5.1.

7.6.21.1 NR SA FR2 Inter-frequency SSB-based L1-RSRP measurement with measurement gap for LTM

Editor's Note: This test case is incomplete in following aspects:

- LTM specific configurations are missing.
- Test applicability is FFS.
- TT analysis is missing.
- Test parameters contain [ ].

7.6.21.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of inter-frequency SSB based L1-RSRP measurement with measurement gap for candidate neighbour cell in FR2 within L1-RSRP measurement requirements specified in TS 38.133 [6] clause 9.15.

7.6.21.1.2 Test applicability

This test applies to all types of NR UE supporting SSB based inter-frequency L1-RSRP measurements with measurement gaps and reports for LTM from release 18 and forward.

7.6.21.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.21.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.21.1.

7.6.21.1.4 Test description

7.6.21.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.21.1.4.1-1.

Table 7.6.21.1.4.1-1: Supported test configurations

Test Case ID	Description
7.6.21.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.6.21.1-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Test environment parameters are given in Table 7.6.21.1.4.1-2.

Table 7.6.21.1.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clauses 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.21.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	Without LTE link		

1. The general test parameter settings are set up according to Table 7.6.21.1.4.1-3.
2. Message contents are defined in clause 7.6.21.1.4.3.
3. There are two NR carriers and one cell on each carrier in the test. Cell 1 (Pcell) is on NR RF channel 1, and is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test. Cell 2 (inter neighbour cell) is on NR RF channel 2.
4. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX beam peak direction has been obtained previously using one of the search procedures as described in Annex I.

Table 7.6.21.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Active cell			Cell 1	
Neighbouring cell			Cell 2	Cell 2 is the candidate cell
A3-Offset		dB	[-15]	
Hysteresis		dB	0	
Time To Trigger		ms	0	
Filter coefficient			0	L3 filtering is not used
reportQuantityRS-Indexes			rsrp	
maxNrofRS-IndexesToReport			1	
includeBeamMeasurements			true	
DRX			OFF	DRX is not used
Time offset between cells			3 μs	The timing of Cell 2 is later than the timing of Cell 1
Gap Pattern Id			13	
Measurement gap offset		ms	39	
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	320	Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1	Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1	
	spCellInclusion		N/A	
ltm-ConfigComplete			true	Candidate cell's configuration is complete configuration
T1		s	2	
T2		s	≤ 2	

7.6.21.1.4.2 Test procedure

UE is indicated to perform inter-frequency L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. SSB_RP of Cell 2 in T1 and T2 are different. Measurement gap pattern configuration defined in Table 7.6.21.1.4.1-3 is provided.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 7.6.21.1.5-1.
3. SS shall transmit *RRCReconfiguration* message to configure Event A3 triggered measurement report.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. The UE shall transmit *MeasurementReport* message triggered by Event A3 including Cell 2 measurement report with SSB index.
6. SS shall transmit *RRCReconfiguration* message to configure *LTM-Candidate-r18* for Cell 2. UE is configured with SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports for candidate Cell 2 in PUCCH format 2.
7. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
8. The UE shall transmit L1-RSRP on PUCCH format 2 in Cell 1 with a periodicity of 320 slots.
9. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.21.1.5-1. T2 starts.
10. The UE shall continue to send valid L1-RSRP reports. The SS shall check the following requirements:

    - R1: the UE shall start to transmit valid reports no later than 1320 ms from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement (Table 7.6.21.1.5-2 for test configuration 1 and Table 7.6.21.1.5-3 for test configuration 2). For candidate Cell 2, the reported L1-RSRP value in T2 shall be larger than the value reported in T1. If the first valid report is received earlier than the specified time and includes a larger L1-RSRP value of Cell 2, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

- R2: the UE shall transmit reports every 320 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

- R3: the L1-RSRP value of Cell 2 reported by the UE is compared to the expected L1-RSRP value. In all consecutive reports after the first valid value is received, if the reported value is outside the limits in Table 7.6.21.1.5-2 for test configuration 1 and in Table 7.6.21.1.5-3 for test configuration 2, or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

11. The SS waits until T2 expires.

12. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

13. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

14. After the RRC connection release, the SS:

    - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),

    OR

    - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

15. Repeat steps 2-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.21.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 7.6.21.1.4.3-1: Common Exception messages (step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ and GAP NEEDED Table H.3.1-5 with condition SSB Index Table H.3.1-6 with conditions gapUE and Pattern #13 Table H.3.1-7 with conditions INTER-FREQ and SSB Index
Specific message contents exceptions for Cell 2	Table H.3.1-3 with condition INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.6.21.1.4.3-2: ReportConfigNR (a3-Offset) (step 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A3			
Information Element	Value/remark	Comment	Condition
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	[-30]	The actual value is field value * 0.5 dB	
}			

hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
maxReportCells	1		
reportQuantityRS-Indexes SEQUENCE {			
rsrp	true		
rsrq	false		
sinr	false		
}			
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	true		
}			
}			
}			

Table 7.6.21.1.4.3-3: Common Exception messages (step 6)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.12-1 with condition L1-RSRP Table H.3.12-2 with condition L1-RSRP Table H.3.12-3 Table H.3.12-4 Table H.3.12-5 with condition [TBD] Table H.3.12-6 Table H.3.12-8 Table H.3.12-9 with conditions FR2 and SSB#0

7.6.21.1.5 Test requirement

Table 7.6.21.1.5-1 and Table 7.6.21.1.5-2 define the primary level settings including test tolerances for all tests.

Table 7.6.21.1.5-1: Cell specific test parameters

Parameter	Config	Unit	Cell 1	Cell 2
SSB GSCN	1~2		freq1	freq 2
Duplex mode	1~2		TDD	
TDD Configuration	1~2		TDDConf.3.1	
BWchannel	1~2	MHz	100: $N_{PRB,c}$ = 66	
Data RBs allocated	1~2		66	
PDSCH/PDCCH subcarrier spacing	1~2	KHz	120	
PUCCH/PUSCH subcarrier spacing	1~2	KHz	120	
PDSCH Reference measurement channel	1		SR.3.2 TDD	N/A
	2		SR.3.3 TDD	N/A
RMSI CORESET Reference Channel	1		CR.3.1 TDD	N/A
	2		CR.3.2 TDD	N/A
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	N/A
	2		CCR.3.7 TDD	N/A
SSB configuration	1		SSB.3 FR2	SSB.3 FR2
	2		SSB.4 FR2	SSB.4 FR2
OCNG Patterns	1~2		OP.1	OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3	
SMTC configuration	1~2		SMTC.1	SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD	N/A

PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2	N/A
EPRE ratio of PSS to SSS	1~2	dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS[Note 1]				
EPRE ratio of OCNG to OCNG DMRS[Note 1]				
Propagation condition	1~2		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table 7.6.21.1.5-2: NR OTA cell specific test parameters

Parameter	Config	Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Angle of arrival configuration	1~2		Setup 1 according to A.9.1			
Beam Assumption[Note 4]	1~2		Rough		Rough	
Ês/Iot$_{BB}$[Note 5]	1~2	dB	16.5+TT	16.5+TT	-1.5+TT	16.5+TT
SSB_RP[Note 3]	1	dBm/SSB SCS	-85+TT	-85+TT	-103+TT	-85+TT
	2		-82+TT	-82+TT	-100+TT	-82+TT
Io[Note 3]	1	dBm/95.04MHz	-56+TT	-56+TT	-74+TT	-56+TT
	2		-56+TT	-56+TT	-74+TT	-56+TT
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.						
Note 5: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [3] Table 6.2.1.3-4.						

The UE shall send L1-RSRP report every 320 slots in T2. The UE shall start to report a larger L1-RSRP value of Cell 2 in no later than 960 ms plus 320 slots from the beginning of time period T2. During T2, each L1-RSRP measurement report of Cell 2 shall meet the corresponding absolute accuracy requirements in Table 7.6.21.1.5-3 for test configuration 1, and the corresponding absolute accuracy requirements in Table 7.6.21.1.5-4 for test configuration 2.

Table 7.6.21.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 1

Normal Conditions	T2
Lowest reported value (Cell 2)	TBD
Highest reported value (Cell 2)	TBD

Table 7.6.21.1.5-4: L1-RSRP absolute accuracy requirements for the reported values for test configuration 2

Normal Conditions	T2
Lowest reported value (Cell 2)	TBD
Highest reported value (Cell 2)	TBD

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.6.22 LTM Inter-frequency L1-RSRP measurement without measurement gap

7.6.22.0 Minimum conformance requirements

FFS

7.6.22.1 NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Message contents are FFS

7.6.22.1.1 Test purpose

To verify the UE supporting [FG 39-2: SSB based inter-frequency L1-RSRP measurements without measurement gaps] makes correct reporting of inter-frequency L1-RSRP measurement without gap for LTM. This test will partly verify the L1-RSRP measurement requirements in TS 38.133 [6] clause 9.15.6

7.6.22.1.2 Test applicability

This test applies to all types of NR UE supporting SSB based inter-frequency L1-RSRP measurements without measurement gaps and reports for LTM from release 18 and forward. Test 2 is applicable only to UEs supporting *multiCellL1-measRTD-greaterThan-CP-r18*, otherwise Test 1 is applicable.

7.6.22.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.6.22.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.6.22.1.

7.6.22.1.4 Test description

7.6.22.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.6.22.1.4.1-1

Table 7.6.22.1.4.1-1: Supported test configurations

Config	Description
7.6.22.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.6.22.1-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: Target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Test environment parameters are given in Table 7.6.22.1.4.1-2.

Table 7.6.22.1.4.1-2: Initial conditions for NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.

Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.6.14.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram			

1. The general test parameter settings are TBD

Table 7.6.22.1.4.1-3: General test parameters for NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX

Parameter		Unit	Value		Comment
			Test 1	Test 2	
Active cell			Cell 1		
Neighbouring cell			Cell 2		Cell 2 is the candidate cell
RF Channel Number			1: Cell 1 2: Cell 2		
A3-Offset		dB	-30		
Hysteresis		dB	0		
Time To Trigger		ms	0		
Filter coefficient			0		L3 filtering is not used
maxNrofRS-IndexesToReport			1		
includeBeamMeasurements			True		
DRX			OFF		DRX is not used
Time offset between cells			0.2 μs	2μs	The timing of Cell 2 is later than the timing of Cell 1
LTM-CSI-ReportConfig	L1-RSRP reporting period	slot	320		Periodic L1-RSRP reporting configured
	nrOfReportedCells		n1		Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1		
	spCellInclusion		N/A		
ltm-ConfigComplete			True		Candidate cell's configuration is complete configuration
T1		s	1.5		
T2		s	≤2		

7.6.22.1.4.2 Test procedure

In CSI measurement configuration, UE is indicated to perform inter-frequency L1-RSRP measurement on the SSBs and report periodically. The SSB of Cell 2 is completely within UE's active BWP BW. The RBs containing SSB from Cell 1 and Cell 2 should be different in frequency location within the cell bandwidth.

There are two tests in the test case, test 1 and test 2:

- In test 1, time offset between cells is within CP length.
- In test 2, time offset between cells is larger than CP length.

UE not capable of *multiCellL1-measRTD-greaterThan-CP-r18* is only required to pass test 1. Otherwise, it is only required to pass test 2.

The test consists of two successive time periods, with time duration of T1 and T2 respectively. There is no measurement gap configured in the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 7.6.22.1.5-1.

3. SS shall transmit an *RRCReconfiguration* message to configure Event A3 triggered measurement report.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. The UE shall transmit a *MeasurementReport* message triggered by Event A3 including Cell 2 measurement report with SSB index.
6. SS shall transmit an *RRCReconfiguration* message to configure *LTM-Candidate-r18* for Cell 2. UE is configured with SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports for candidate Cell 2 in PUCCH format 2.
7. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
8. The UE shall transmit L1-RSRP on PUCCH format 2 in Cell 1 with a periodicity of 80 slots.
9. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 7.6.22.1.5-1. T2 starts at the beginning of a frame with an even SFN.
10. The UE shall continue to send valid L1-RSRP reports. The SS shall check the following requirements:

    -R1: the UE shall start to transmit valid reports no later than 1000 ms for configuration 1 and no later than 980 slots for configuration 2 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement (Table 7.6.22.1.5-2 for test configurations 1 and Table 7.6.22.1.5-3 for test configuration 2). If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

    -R2: the UE shall transmit reports every 320 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

    -R3: the L1-RSRP value of Cell 2 reported by the UE is compared to the expected L1-RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 7.6.22.1.5-2 for test configuration 1 and in Table 7.6.22.1.5-3 for test configuration 2, or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

11. The SS waits until T2 expires.
12. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
13. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
14. After the RRC connection release, the SS:

    - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),

    or:

    - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

15. Repeat steps 2-14 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

7.6.22.1.4.3 Message contents

TBD

7.6.22.1.5 Test requirements

Table 7.6.22.1.4.1-3, 7.6.22.1.5-1, and Table 7.6.22.1.5-2 defines the primary level settings for all tests.

Table 7.6.22.1.5-1: NR Cell specific test parameters for NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX

Parameter	Config	Unit	Cell 1	Cell 2
SSB GSCN	1~2		freq1	freq2
Duplex mode	1~2		TDD	
TDD Configuration	1~2		TDDConf.3.1	
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	1~2		66	
PDSCH/PDCCH subcarrier spacing	1~2	KHz	120	
PUCCH/PUSCH subcarrier spacing	1~2	KHz	120	
PDSCH Reference measurement channel	1		SR.3.2 TDD	N/A
	2		SR.3.3 TDD	N/A
RMSI CORESET Reference Channel	1		CR.3.1 TDD	N/A
	2		CR.3.2 TDD	N/A
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	N/A
	2		CCR.3.7 TDD	N/A
SSB configuration	1		SSB.3 FR2	
	2		SSB.4 FR2	
OCNG Patterns	1~2		OP.4	N/A
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3	
SMTC configuration	1~2		SMTC.1	
TRS Configuration	1~2		TRS.2.1 TDD	N/A
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2	N/A
EPRE ratio of PSS to SSS	1~2	dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1~2		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table 7.6.22.1.5-2: NR OTA Cell specific test parameters for TBD NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX TBD

Parameter	Config	Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Angle of arrival configuration	1~2		Setup 1 according to A.3.15.1			
Beam Assumption Note 3	1~2		Rough		Rough	

$\hat{E}_s/I_{ot}$ BB Note 4	1~2	dB	-1.5	16.5	-1.5	16.5
SSB_RP Note2	1	dBm/SSB SCS	-103	-85	-103	-85
	2		-100	-82	-100	-82
Io Note2	1	dBm/95.04MHz	-74	-56	-74	-56
	2		-74	-56	-74	-56
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.						

The UE shall send L1-RSRP report every 320 slots in T2. No later than 960 ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the valid results for Cell 2 while meeting the accuracy requirements defined in clause 10.1.20B.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

7.7 Measurement performance requirements

7.7.1 SS-RSRP

7.7.1.0 Minimum conformance requirements

7.7.1.0.1 Intra-frequency SS-RSRP measurement accuracy requirements

Same as in clause 5.7.1.0.1.

7.7.1.0.2 Inter-frequency SS-RSRP measurement accuracy requirements

Same as in clause 5.7.1.0.2.

7.7.1.1 NR SA FR2 SS-RSRP measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC1, PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC1 and PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.7.1.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP measurement accuracy is within the specified limits for all bands.

7.7.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.7.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.1.1.

7.7.1.1.4 Test description

Two cells are configured in this test: Cell 1 is the NR FR2 serving cell and Cell 2 is the NR FR2 neighbour cell.

7.7.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.1.1.4.1-1.

Table 7.7.1.1.4.1-1: Supported test configurations

Configuration	Description
7.7.1.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.7.1.1.4.1-2.

Table 7.7.1.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 7.7.1.1.4.1-3.
2. Message contents are defined in clause 7.7.1.1.4.3.
3. There are two intra-frequency cells specified in the test, where Cell 1 is the NR FR2 serving cell and Cell 2 is the neighbour cell on the same NR FR2 carrier and the target cell for the SS-RSRP measurements.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.1.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 7.7.1.1.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport for the following requirements:

- R1: The SS-RSRP value of Cell 1 reported by the UE is compared to the expected SS-RSRP for Cell 1. If the value is outside the limits in Table 7.7.1.1.5-3 or the UE fails to report the measurement value for Cell 1, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

- R2: The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP for Cell 2. If the value is outside the limits in Table 7.7.1.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

- R3: The SS-RSRP value of Cell 2 reported by the UE is compared to the reported SS-RSRP of Cell 1. If the resulting value is outside the limits in Table 7.7.1.1.5-4 or the UE fails to report the measurement value for Cell 1 or Cell 2, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G for each of the requirements is achieved. The evaluation of a specific requirement is concluded when the confidence level for that requirement is reached, even if more measurement reports are required for the remaining requirements.

7a. The SS shall check all the SS-RSRP reported values during Test 1 for the following requirements:

- R9: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 1 reported by the UE. If the difference exceeds the limits in Table 7.7.1.1.5-3a count a fail for R9. Otherwise, R9 is passed.

- R10: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 2 reported by the UE. If the difference exceeds the limits in Table 7.7.1.1.5-3a count a fail for R10. Otherwise, R10 is passed.

8. Set the parameters according to Test 2 in Table 7.7.1.1.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements:

- R4: The SS-RSRP value of Cell 1 reported by the UE is compared to the expected SS-RSRP for Cell 1. If the value is outside the limits in Table 7.7.1.1.5-3 or the UE fails to report the measurement value for Cell 1, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

- R5: The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP for Cell 2. If the value is outside the limits in Table 7.7.1.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R5 is increased by one. Otherwise, the number of passed iterations for R5 is increased by one.

- R6: The SS-RSRP value of Cell 2 reported by the UE is compared to the reported SS-RSRP of Cell 1. If the resulting value is outside the limits in Table 7.7.1.1.5-4 or the UE fails to report the measurement value for Cell 1 or Cell 2, the number of failed iterations for R6 is increased by one. Otherwise, the number of passed iterations for R6 is increased by one.

- R7: The SS-RSRP value of Cell 1 reported by the UE during Test 2 is compared to the reported SS-RSRP of Cell 1 during Test 1 for the same iteration. If the resulting value is outside the limits in Table 7.7.1.1.5-5 or the UE fails to report the measurement value for Cell 1, the number of failed iterations for R7 is increased by one. Otherwise, the number of passed iterations for R7 is increased by one

- R8: The SS-RSRP value of Cell 2 reported by the UE during Test 2 is compared to the reported SS-RSRP of Cell 2 during Test 1 for the same iteration. If the resulting value is outside the limits in Table 7.7.1.1.5-5 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R8 is increased by one. Otherwise, the number of passed iterations for R8 is increased by one

8a. The SS shall check all the SS-RSRP reported values during Test 2 for the following requirements:

- R11: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 1 reported by the UE. If the difference exceeds the limits in Table 7.7.1.1.5-3a count a fail for R11. Otherwise, R11 is passed.

- R12: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 2 reported by the UE. If the difference exceeds the limits in Table 7.7.1.1.5-3a count a fail for R12. Otherwise, R12 is passed.

9. If more measurement reports with Test 1 configuration are needed in order to complete the evaluation R7 or R8, the SS shall set the parameters according to Table 7.7.1.1.5-2 as appropriate and repeat steps 5 to 8, evaluating R7 and / or R8 as appropriate.

7.7.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition Synchronous cells Table H.3.1-5 Table H.3.1-7 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.1.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

7.7.1.1.5 Test requirement

Table 7.7.1.1.5-1 defines the cell specific settings for all tests. Table 7.7.1.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clause 7.7.1.0.1.1 and relative accuracy requirements in clause 7.7.1.0.1.2. The following eight requirements are to be verified:

During T1:

R1: Absolute accuracy of Cell 1. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table 7.7.1.1.5-3.

R2: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table 7.7.1.1.5-3.

R3: Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 7.7.1.1.5-4.

R9: Δ(Max-Min) accuracy of Cell 1. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 7.7.1.1.5-3a.

R10: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 7.7.1.1.5-3a.

During T2:

R4: Absolute accuracy of Cell 1. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table 7.7.1.1.5-3.

R5: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table 7.7.1.1.5-3.

R6: Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 7.7.1.1.5-4.

R11: Δ(Max-Min) accuracy of Cell 1. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 7.7.1.1.5-3a.

R12: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 7.7.1.1.5-3a.

During T1 and T2:

R7: Relative accuracy of Cell 1 during T2 compared with Cell 1 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 7.7.1.1.5-5.

R8: Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 7.7.1.1.5-5.

Table 7.7.1.1.5-1: SS-RSRP Intra frequency general test parameters

Parameter[Note 5]	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Physical cell ID		**489**	**0**	**489**	**0**
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		24		24	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.2 TDD	-	SR.3.2 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 1	μs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					

EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: All parameters apply for configuration 1 and 2 Note 6: Void					

Table 7.7.1.1.5-2: SS-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1			
Assumption for UE beams Note 8		Rough			
N_{oc} Note1	dBm/15kHz Note4	-97.4		N/A	
N_{oc} Note1	dBm/SCS Note4	-88.37		N/A	
$\hat{E}_s/N_{oc}$	dB	6.0	1.4	N/A	N/A
E_s PC1	dBm/SCS Note4			(Table B.2.2-2 Rx Beam Peak +8.1dB)	(Table B.2.2-2 Rx Beam Peak +8.1dB)
E_s PC3	dBm/SCS Note4			(Table B.2.2-2 Rx Beam Peak +9.8dB)	(Table B.2.2-2 Rx Beam Peak +9.8dB)
SSB_RP Note2 PC1	dBm/SCS	-82.37	-86.97	(Table B.2.2-2 Rx Beam Peak +8.1dB)	(Table B.2.2-2 Rx Beam Peak +8.1dB)
SSB_RP Note2 PC3	dBm/SCS	-82.37	-86.97	(Table B.2.2-2 Rx Beam Peak +9.8dB)	(Table B.2.2-2 Rx Beam Peak +9.8dB)
$\hat{E}_s/I_{ot}$ BB Note6	dB	2.20	-5.59	-1.77	-1.77
Io Note2	dBm/95.04 MHz Note4	-55.74		(Table B.2.2-2 Rx Beam Peak +37.40dB)	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void					

Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [3] Table 6.2.1.3-4.
Note 7:	All parameters apply for configurations 1 and 2
Note 8:	Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 7.7.1.1.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5

UE power class 1			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	60	n257, n258, n261	41
		n260	44
		n259	FFS
Highest reported value (Cell 1)	126	n257, n258, n261	118
		n260	121
		n259	FFS
Lowest reported value (Cell 2)	56	n257, n258, n261	41
		n260	44
		n259	FFS
Highest reported value (Cell 2)	126	n257, n258, n261	118
		n260	121
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	57+ FFS	n257, n258, n261	38 + FFS
		n260	41 + FFS
		n259	FFS
Highest reported value (Cell 1)	126+ FFS	n257, n258, n261	121 + FFS
		n260	124 + FFS
		n259	FFS
Lowest reported value (Cell 2)	53+ FFS	n257, n258, n261	38+ FFS
		n260	41+ FFS
		n259	FFS
Highest reported value (Cell 2)	126+ FFS	n257, n258, n261	121+ FFS
		n260	125+ FFS
		n259	FFS
UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	50	n257, n258, n261	31
		n260	33
		n259	FFS
Highest reported value (Cell 1)	108	n257, n258, n261	88
		n260	90
		n259	FFS
Lowest reported value (Cell 2)	46	n257, n258, n261	31
		n260	33
		n259	FFS
Highest reported value (Cell 2)	103	n257, n258, n261	88
		n260	90
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	47+ FFS	n257, n258, n261	28 + FFS
		n260	30 + FFS
		n259	FFS
Highest reported value (Cell 1)	111+ FFS	n257, n258, n261	91 + FFS
		n260	93 + FFS

		n259	FFS
Lowest reported value (Cell 2)	46+ FFS	n257, n258, n261	28+ FFS
		n260	30+ FFS
		n259	FFS
Highest reported value (Cell 2)	106+ FFS	n257, n258, n261	91+ FFS
		n260	93+ FFS
		n259	FFS

Table 7.7.1.1.5-3a: evaluation limits for the Δ(Max-Min) reported values for each cell during each time period

UE power class 1		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 1	16	16
Δ(Max-Min) reported value Cell 2	16	16
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 1	16 + FFS	16+ FFS
Δ(Max-Min) reported value Cell 2	16 + FFS	16 + FFS
UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 1	16	16
Δ(Max-Min) reported value Cell 2	16	16
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 1	16 + FFS	16+ FFS
Δ(Max-Min) reported value Cell 2	16 + FFS	16 + FFS

Table 7.7.1.1.5-4: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 1		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 2 – Cell 1)	RSRP_x - 12	RSRP_x - 6
Highest reported value (Cell 2 – Cell 1)	RSRP_x + 2	RSRP_x + 6
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 2 – Cell 1)	RSRP_x - 15+ FFS	RSRP_x - 9+ FFS
Highest reported value (Cell 2 – Cell 1)	RSRP_x + 5+ FFS	RSRP_x + 9+ FFS
UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 2 – Cell 1)	RSRP_x - 12	RSRP_x - 6
Highest reported value (Cell 2 – Cell 1)	RSRP_x + 2	RSRP_x + 6
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**

Lowest reported value (Cell 2 – Cell 1)	RSRP_x - 15+ FFS	RSRP_x - 9+ FFS
Highest reported value (Cell 2 – Cell 1)	RSRP_x + 5+ FFS	RSRP_x + 9+ FFS
RSRP_x is the reported value of Cell 1		

Table 7.7.1.1.5-5: evaluation limits for the reported values for T2 with respect to T1 relative accuracy rules R7, R8

UE power class 1			
Test 2	**Bands**	**Normal Conditions**	**Extreme Conditions**
Lowest reported value (Cell 1 T2 – Cell 1 T1)	n257, n258, n261	RSRP_x - 28	RSRP_x - 31+ FFS
	n260	RSRP_x - 25	RSRP_x - 28+ FFS
	n259	FFS	FFS
Highest reported value (Cell 1 T2 – Cell 1 T1)	n257, n258, n261	RSRP_x - 12	RSRP_x - 9+ FFS
	n260	RSRP_x - 9	RSRP_x - 6+ FFS
	n259	FFS	FFS
Lowest reported value (Cell 2 T2 – Cell 2 T1)	n257, n258, n261	RSRP_y - 24	RSRP_y - 27+ FFS
	n260	RSRP_y - 21	RSRP_y - 24+ FFS
	n259	FFS	FFS
Highest reported value (Cell 2 T2 – Cell 2 T1)	n257, n258, n261	RSRP_y - 8	RSRP_y - 5+ FFS
	n260	RSRP_y - 5	RSRP_y - 2+ FFS
	n259	FFS	FFS
UE power class 3			
Test 2	**Bands**	**Normal Conditions**	**Extreme Conditions**
Lowest reported value (Cell 1 T2 – Cell 1 T1)	n257, n258, n261	RSRP_x - 28	RSRP_x - 31+ FFS
	n260	RSRP_x - 26	RSRP_x - 29+ FFS
	n259	FFS	FFS
Highest reported value (Cell 1 T2 – Cell 1 T1)	n257, n258, n261	RSRP_x - 12	RSRP_x - 9+ FFS
	n260	RSRP_x - 10	RSRP_x - 7+ FFS
	n259	FFS	FFS
Lowest reported value (Cell 2 T2 – Cell 2 T1)	n257, n258, n261	RSRP_y - 24	RSRP_y - 27+ FFS
	n260	RSRP_y - 21	RSRP_y - 24+ FFS
	n259	FFS	FFS
Highest reported value (Cell 2 T2 – Cell 2 T1)	n257, n258, n261	RSRP_y - 8	RSRP_y - 5+ FFS
	n260	RSRP_y - 5	RSRP_y - 2+ FFS
	n259	FFS	FFS
RSRP_x is the reported value of Cell 1 during T1 RSRP_y is the reported value of Cell 2 during T1			

For the test to pass, the ratio of successful reported values for each requirement (R1 to R8) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.1.2 NR SA FR2-FR2 SS-RSRP measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.7.1.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP measurement accuracy is within the specified limits for all bands.

7.7.1.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.7.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.1.2.

7.7.1.2.4 Test description

Two cells are configured in this test: Cell 1 is the NR FR2 serving cell and Cell 2 is the inter-frequency NR FR2 neighbour cell.

7.7.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.1.2.4.1-1.

Table 7.7.1.2.4.1-1: Supported test configurations

Configuration	Description
7.7.1.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, FDD duplex mode
7.7.1.2-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.7.1.2.4.1-2.

Table 7.7.1.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 7.7.1.2.4.1-3.
2. Message contents are defined in clause 7.7.1.2.4.3.
3. There are two inter-frequency cells specified in the test, where Cell 1 is the serving cell on an NR FR2 carrier and Cell 2 is the neighbour cell on a different NR FR2 carrier and the target cell for the SS-RSRP measurements.
4. The rx beam peak and directions in which the UE meets the EIS spherical coverage criteria have been found with one of the procedures from Annex I.

7.7.1.2.4.2 Test procedure

1. Configure the positioning system for a valid test point as defined in A.9.4. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 7.7.1.2.5-1 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport for the following requirements:

   - R1: The SS-RSRP value of Cell 1 reported by the UE is compared to the expected SS-RSRP for Cell 1. If the value is outside the limits in Table 7.7.1.2.5-3 or the UE fails to report the measurement value for Cell 1, the number of failed samples for R1 is increased by one. Otherwise, the number of passed samples for R1 is increased by one.

   - R2: The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP for Cell 2. If the value is outside the limits in Table 7.7.1.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed samples for R2 is increased by one. Otherwise, the number of passed samples for R2 is increased by one.

   - R3: The SS-RSRP value of Cell 2 reported by the UE is compared to the reported SS-RSRP of Cell 1. If the resulting value is outside the limits in Table 7.7.1.2.5-4 or the UE fails to report the measurement value for Cell 1 or Cell 2, the number of failed samples for R3 is increased by one. Otherwise, the number of passed samples for R3 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G for each of the requirements is achieved. The evaluation of a specific requirement is concluded when the confidence level for that requirement is reached, even if more measurement reports are required for the remaining requirements.

7a. The SS shall check all the SS-RSRP reported values during Test 1 for the following requirements:

   - R7: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 1 reported by the UE. If the difference exceeds the limits in Table 7.7.1.2.5-3a count a fail for R7. Otherwise, R7 is passed.

   - R8: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 2 reported by the UE. If the difference exceeds the limits in Table 7.7.1.2.5-3a count a fail for R8. Otherwise, R8 is passed.

8. The SS shall select a new test point as defined in A.9.4 and rotate the positioning system for the selected test point.

9. Set the parameters according to Test 2 in Table 7.7.2.1.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements:

   - R4: The SS-RSRP value of Cell 1 reported by the UE is compared to the expected SS-RSRP for Cell 1. If the value is outside the limits in Table 7.7.2.1.5-3 or the UE fails to report the measurement value for Cell 1, the number of failed samples for R4 is increased by one. Otherwise, the number of passed samples for R4 is increased by one.

   - R5: The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP for Cell 2. If the value is outside the limits in Table 7.7.2.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed samples for R5 is increased by one. Otherwise, the number of passed samples for R5 is increased by one.

   - R6: The SS-RSRP value of Cell 2 reported by the UE is compared to the reported SS-RSRP of Cell 1. If the resulting value is outside the limits in Table 7.7.2.1.5-4 or the UE fails to report the measurement value for Cell 1 or Cell 2, the number of failed samples for R6 is increased by one. Otherwise, the number of passed samples for R6 is increased by one.

10. The SS shall check all the SS-RSRP reported values during Test 2 for the following requirements:

   - R9: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 1 reported by the UE. If the difference exceeds the limits in Table 7.7.1.2.5-3a count a fail for R9. Otherwise, R9 is passed.

- R10: The maximum SS-RSRP value is compared to the minimum SS-RSRP of Cell 2 reported by the UE. If the difference exceeds the limits in Table 7.7.1.2.5-3a count a fail for R10. Otherwise, R10 is passed.

7.7.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-5 Table H.3.1-6 with condition Pattern #0 Table H.3.1-7 with condition INTER-FREQ Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.1.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

7.7.1.2.5 Test requirement

Table 7.7.1.2.5-1 defines the cell specific settings for all tests. Table 7.7.1.2.5-2 defines the OTA primary level settings including test tolerances for all tests.

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clause 7.7.1.0.2.1 and relative accuracy requirements in clause 7.7.1.0.2.2. The following eight requirements are to be verified:

During T1:

R1: Absolute accuracy of Cell 1. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table 7.7.1.2.5-3 for test configuration 1 and in Table 7.7.1.2.5-4 for test configuration 2.

R2: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table 7.7.1.2.5-3 for test configuration 1 and in Table 7.7.1.2.5-4 for test configuration 2 and Table 7.7.1.2.5-3a [for both configurations].

R3: Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 7.7.1.2.5-5.

R7: Δ(Max-Min) accuracy of Cell 1. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 7.7.1.2.5-3a.

R8: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 7.7.1.2.5-3a.

During T2:

R4: Absolute accuracy of Cell 1. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table 7.7.1.2.5-3 for test configuration 1 and in Table 7.7.1.2.5-4 for test configuration 2.

R5: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table 7.7.1.2.5-3 for test configuration 1 and in Table 7.7.1.2.5-4 for test configuration 2 and Table 7.7.1.2.5-3a [for both configurations].

R6: Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 7.7.1.2.5-5.

R9: Δ(Max-Min) accuracy of Cell 1. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 7.7.1.2.5-3a.

R10: Δ(Max-Min) accuracy of Cell 2. The UE is deemed to meet the requirement if the difference between the maximum and the minimum SS-RSRP report does not exceed the limit in Table 7.7.1.2.5-3a.

Table 7.7.1.2.5-1: SS-RSRP Inter frequency general test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~2		freq1	freq2	freq1	freq2
$BW_{channel}$	1~2		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated	1		24		24	
	2		48		48	
Gap pattern ID			0		0	
Duplex mode	1~2		TDD		TDD	
TDD configuration	1~2		TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel	1		SR.3. 2 TDD	-	SR.3. 2 TDD	-
	2		SR.3.3 TDD		SR.3.3 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	-	CR.3.1 TDD	-
	2		CR.3.2 TDD		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	-	CCR.3.1 TDD	-
	2		CCR.3.7 TDD		CCR.3.7 TDD	
SSB configuration	1		SSB.3 FR2		SSB.3 FR2	
	2		SSB.4 FR2		SSB.4 FR2	
PDSCH/PDCCH subcarrier spacing	1~2	kHz	120		120	
OCNG Patterns	1~2		OP.3		OP.3	
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~2		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2		TCI.State.2	
SMTC configuration	1~2		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 1	1~2	μs	3		3	
EPRE ratio of PSS to SSS	1~2	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition	1~2	-	AWGN	AWGN	AWGN	AWGN

Antenna configuration	1~2	-	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void.						

Table 7.7.1.2.5-2: SS-RSRP Inter frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	1~2		Setup 4b according to clause A.9.4		Setup 4b according to clause A.9.4	
			AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams[Note 7]	1~2		Rough		Rough	
N_{oc}[Note1]	1,	dBm/15kHz[Note4]	-96.3	-96.3	(Table B.2.3-2 Rx Beam Peak[Note 8] -4.63dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] -3.03dB)
	2		-99.3	-99.3		
N_{oc}[Note1]	1	dBm/SCS[Note4]	-87.3	-87.3	(Table B.2.3-2 Rx Beam Peak[Note 8] +4.4dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] +6.0dB)
	2		-87.3	-87.3	(Table B.2.3-2 Rx Beam Peak[Note 8] +7.4dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] +9.0dB)
$\hat{E}_s / N_{oc}$	1~2	dB	6.0	6.0	17.0	1.0
SSB_RP[Note2]	1	dBm/SCS	-81.3	-81.3	(Table B.2.3-2 Rx Beam Peak[Note 8] +21.4dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] +7.0dB)
	2		-81.3	-81.3	(Table B.2.3-2 Rx Beam Peak[Note 8] +24.4dB)	(Table B.2. 3-2 Rx Beam Peak[Note 8] +10.0dB)
($SSB_RP_{Cell\ 1}$ – $SSB_RP_{Cell\ 2}$)	1~2	dB	0		14.40	
$\hat{E}_s / I_{ot}$ BB[Note6]	1	dB	5.23	5.93	5.38	-1.46
	2		4. 58	5.87		
Io[Note2]	1	dBm/95.04 MHz[Note4]	-55.70	-55.70	(Table B.2.3-2 Rx Beam Peak[Note 8] +46.08dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] +35.13dB)
	2		-55.7	-55.7	(Table B.2.3-2 Rx Beam Peak[Note 8] +49.09dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] +38.14dB)
($Io_{freq\ 1}$ – $Io_{freq\ 2}$)	1~2	dB	0		11.95	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP, Es/Iot, Io, ($SSB_RP_{Cell\ 2}$ – $SSB_RP_{Cell\ 1}$) and ($Io_{freq\ 2}$ – $Io_{freq\ 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void						

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P or ΔMB_S from TS 38.101-2 [3] Table 6.2.1.3-4.
Note 7: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation
Note 8: The value in Table B.2.3-2 of TS 38.133 [6] is the Minimum SSB_RP for SCS_{SSB} = 120 kHz, selected according to the operating band of Cell 2 and UE power class, without $\Delta MB_{P,n}$ adjustment.

Table 7.7.1.2.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5 for test configuration 1

UE power class 3				
Normal Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 1)	n257, n258, n261	41	n257, n258, n261	33
	n260	39	n260	34
	n259	FFS	n259	FFS
Highest reported value (Cell 1)	All bands: 109		n257, n258, n261	101
			n260	104
			n259	FFS
Lowest reported value (Cell 2)	All bands: 52		n257, n258, n261	32
			n260	34
			n259	FFS
Highest reported value (Cell 2)	All bands: 109		n257, n258, n261	87
			n260	90
			n259	FFS
Extreme Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 1)	n257, n258, n261	41 + FFS	n257, n258, n261	33 + FFS
	n260	39 + FFS	n260	34 + FFS
	n259	FFS	n259	FFS
Highest reported value (Cell 1)	All bands: 109 + FFS		n257, n258, n261	101 + FFS
			n260	104 + FFS
			n259	FFS
Lowest reported value (Cell 2)	All bands: 52 + FFS		n257, n258, n261	32+ FFS
			n260	34+ FFS
			n259	FFS
Highest reported value (Cell 2)	All bands: 109 + FFS		n257, n258, n261	87+ FFS
			n260	90+ FFS
			n259	FFS

Table 7.7.1.2.5-3a: evaluation limits for the Δ(Max-Min) reported absolute values for cell 2 during each time period

Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 2	16	16
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 2	16 + FFS	16 + FFS

Table 7.7.1.2.5-4: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5 for test configuration 2

UE power class 3				
Normal Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 1)	n257, n258, n261	41	n257, n258, n261	36
	n260	39	n260	37

	n259	FFS	n259	FFS
Highest reported value (Cell 1)	All bands: 109		n257, n258, n261	104
			n260	107
			n259	FFS
Lowest reported value (Cell 2)	All bands: 52		n257, n258, n261	35
			n260	37
			n259	FFS
Highest reported value (Cell 2)	All bands: 109		n257, n258, n261	90
			n260	93
			n259	FFS
Extreme Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 1)	n257, n258, n261	41 + FFS	n257, n258, n261	36 + FFS
	n260	39 + FFS	n260	37 + FFS
	n259	FFS	n259	FFS
Highest reported value (Cell 1)	All bands: 109 + FFS		n257, n258, n261	104 + FFS
			n260	107 + FFS
			n259	FFS
Lowest reported value (Cell 2)	All bands: 52 + FFS		n257, n258, n261	35+ FFS
			n260	37+ FFS
			n259	FFS
Highest reported value (Cell 2)	All bands: 109 + FFS		n257, n258, n261	90+ FFS
			n260	93+ FFS
			n259	FFS

Table 7.7.1.2.5-5: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 3				
Normal Conditions	**Test 1**		**Test 2 All bands**	
Lowest value (RSRP report Cell 2 – RSRP report Cell 1)	All bands: -23		-37	
Highest value (RSRP report Cell 2 – RSRP report Cell 1)	n257, n258, n261	+26	n257, n258, n261	+17
	n260	+27	n260	+19
	n259	FFS	n259	FFS
Extreme Conditions	**Test 1**		**Test 2 All bands**	
Lowest value (RSRP report Cell 2 – RSRP report Cell 1)	-23 + FFS		-37 + FFS	
Highest value (RSRP report Cell 2 – RSRP report Cell 1)	n257, n258, n261	+26 + FFS	n257, n258, n261	+17 + FFS
	n260	+27+ FFS	n260	+19 + FFS
	n259	FFS	n259	FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 to R6) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.1.3 Inter-frequency measurements between FR1 and FR2

7.7.1.3.1 NR SA FR1-FR2 SS-RSRP measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

- NR FR1 - FR2 OTA testability is still FFS.

7.7.1.3.1.1 Test Purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP absolute measurement accuracy with FR1 serving cell and FR2 target cell.

7.7.1.3.1.2 Test applicability

This test applies to all types of NR UE release 15 onwards.

7.7.1.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.1.3.

7.7.1.3.1.4 Test description

7.7.1.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.1.3.1.4.1-1.

Table 7.7.1.3.1.4.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Config	Description of serving cell	Description of target cell
7.7.1.3.1-1	NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.7.1.3.1-2	NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode	
7.7.1.3.1-3	NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode	

Configure the test equipment and the DUT according to the parameters in Table 7.7.1.3.1.4.1-2.

Table 7.7.1.3.1.4.1-2: Initial conditions for NR SA FR1-FR2 SS-RSRP absolute measurement accuracy

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.7.1.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.7.1.3.1.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR FR2 neighbour cell (the target cell for SS-RSRP measurements) on a different frequency than the PCell. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

3. The directions in which the UE meets the EIS spherical coverage criteria have been found with one of the procedures from Annex I.

7.7.1.3.1.4.2 Test procedure

1. Configure the positioning system for a valid test point as defined in A.9.2. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 7.7.1.3.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport for the following requirements:

   - R1: The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP for Cell 2. If the value is outside the limits in Table 7.7.1.3.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G for each of the requirements is achieved. The evaluation of a specific requirement is concluded when the confidence level for that requirement is reached, even if more measurement reports are required for the remaining requirements.
8. The SS shall select a new test point as defined in A.9.2 and rotate the positioning system for the selected test point.
9. Set the parameters according to Test 2 in Table 7.7.1.3.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements:

   - R2: The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP for Cell 2. If the value is outside the limits in Table 7.7.1.3.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

7.7.1.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.1.3.1.4.3-1: Common Exception messages for NR SA FR1-FR2 SS-RSRP absolute measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition SSB.1 FR1 and Synchronous cells Table H.3.1-5 Table H.3.1-6 with condition Pattern #0 Table H.3.1-7 with Condition INTER-FREQ Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.1.3.1.4.3-2: ReportConfigNR-DEFAULT

Derivation Path: TS 38.508-1 [14] Table 4.6.3-142 with Condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			

}			

7.7.1.3.1.5 Test requirement

Table 7.7.1.3.1.5-1 and Table 7.7.1.3.1.5-2 define the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 7.7.1.3.1.5-1 and 7.7.1.3.1.5-2 shall meet the corresponding absolute accuracy requirements in Table 7.7.1.3.1.5-3.

Table 7.7.1.3.1.5-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~3		freq1	freq2	freq1	freq2
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66	10: $N_{RB,c}$ = 52	100: $N_{RB,c}$ = 66
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Duplex mode	1		FDD	TDD	FDD	TDD
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A	TDDConf. 3.1	N/A	TDDConf. 3.1
	2		TDDConf. 1.1		TDDConf. 1.1	
	3		TDDConf. 2.1		TDDConf. 2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1	SSB.1 FR2	SSB.1 FR1	SSB.1 FR2
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~3		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~3		TCI.State.2		TCI.State.2	
SMTC configuration	1~3		SMTC.1		SMTC.1	
Time offset between Cell 1 and Cell 2	1~3	µs	3		3	
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						

EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition	1~3	-	NA	AWGN	NA	AWGN
Antenna configuration	1~3	-	Link only, see TS 38.133 [6] clause A.3.7A	1x2	Link only, see TS 38.133 [6] clause A.3.7A	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 7.7.1.3.5-2: SS-RSRP inter-frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration according to clause A.9			NA	Setup 2b	NA	Setup 2b
Assumption for UE beams Note 4			N/A	Rough	N/A	Rough
N_{oc}	1~6	dBm/15 kHz	NA Link only, see clause A.3.7A of TS 38.133 [6]	-95.5	NA Link only, see clause A.3.7A of TS 38.133 [6]	NA
N_{oc}	1~6	dBm/SSB SCS		-86.47		NA
$\hat{E}_s / N_{oc}$	1~6	dB		5		NA
E_s	1~6	dBm/SCS		NA		(Table B.2.3-2 Spherical coverage +6.5dB)
SSB_RP Note1	1~6	dBm/SCS		-81.47		(Table B.2.3-2 Spherical coverage +6.5dB)
$\hat{E}_s / I_{otBB}$ Note6	1~6	dB		4.35		1.69
Io Note1	1~6	dBm/ 95.04MHz		-55.68		SSB_RP+34.48

Note 1: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 2: Void
Note 3: No additional noise is added by the test system in Test 2.
Note 4: Information about types of UE beam is given in B.2.1.3, of TS 38.133 [6] and does not limit UE implementation or test system implementation.
Note 5: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 6:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [2], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [2] Table 6.2.1.3-4.

Table 7.7.1.3.5-3: evaluation limits for the reported values for Test 1 and Test 2 absolute accuracy rules R1, R2

UE power class 3				
Normal Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 2)	n257, n258, n261	46	n257, n258, n261	46
	n260	45	n260	47
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	n257, n258, n261	103	n257, n258, n261	101
	n260	102	n260	104
	n259	FFS	n259	FFS
Extreme Conditions	**Test 1**		**Test 2**	
Lowest reported value (Cell 2)	n257, n258, n261	FFS	n257, n258, n261	FFS
	n260	FFS	n260	FFS
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	n257, n258, n261	FFS	n257, n258, n261	FFS
	n260	FFS	n260	FFS
	n259	FFS	n259	FFS

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

7.7.1.3.2 Void

7.7.2 SS-RSRQ

7.7.2.0 Minimum conformance requirements

7.7.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements

Same as in clause 5.7.2.0.1.

7.7.2.0.2 Inter-frequency SS-RSRQ measurement accuracy requirements

Same as in clause 5.7.2.0.2.

7.7.2.1 NR SA FR2 SS-RSRQ measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.7.2.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRQ measurement accuracy is within the specified limits for all bands.

7.7.2.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.7.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.2.1.

7.7.2.1.4 Test description

Two cells are configured in this test: Cell 1 is the NR FR2 serving cell and Cell 2 is the intra-frequency NR FR2 neighbour cell.

7.7.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.2.1.4.1-1.

Table 7.7.2.1.4.1-1: Supported test configurations

Configuration	Description
7.7.2.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.7.2.1.4.1-2.

Table 7.7.2.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 7.7.2.1.4.1-3.
2. Message contents are defined in clause 7.7.2.1.4.3.
3. There are two intra-frequency cells specified in the test, where Cell 1 is the NR FR2 serving cell and Cell 2 is the neighbour cell on the same NR FR2 carrier and the target cell for the SS-RSRQ measurements.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.2.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 7.7.2.1.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport. The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 7.7.2.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 7.7.2.1.5-2 as appropriate and repeat steps 5-7.

7.7.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition Synchronous cells Table H.3.1-5 Table H.3.1-7 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

7.7.2.1.5 Test requirement

Table 7.7.2.1.5-1 defines the cell specific settings for all tests. Table 7.7.2.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 7.7.2.1.5-2 shall meet the corresponding absolute accuracy requirements in Table 7.7.2.1.5-3.

Table 7.7.2.1.5-1: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			

Dedicated UL BWP		ULBWP.1.1			
TRS configuration		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state		TCI.State.0		TCI.State.0	
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation condition		AWGN		AWGN	
Antenna Configuration		1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: Void.					

Table 7.7.2.1.5-2: SS-RSRQ Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1		Setup 1	
Assumption for UE beams Note 9		Rough			
N_{oc} Note1	dBm/15kHz Note4	-100.7		-96.7	
N_{oc} Note1	dBm/SCS Note3	-91.67		-87.67	
SSB_RP Note2	dBm/SCS Note4	-88.67	-88.67	-90.67	-90.67
SS-RSRQ Note2	dB	-14.81	-14.81	-16.84	-16.84
$\hat{E}_s / I_{ot}$	dB	-1.76	-1.76	-4.76	-4.76
$\hat{E}_s / N_{oc}$	dB	3	3	-3	-3
Io Note2	dBm/95.04 MHz Note4	-55.7		-55.67	-55.67

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRQ and SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Void.
Note 7:	Void
Note 8:	Void
Note 9:	Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 7.7.2.1.5-3: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

UE Power Class 3	Test 1 (All bands)	Test 2	
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_41	n257, n258, n261	SS-RSRQ_35
		n260	SS-RSRQ_34
		n259	FFS
Highest reported value (Cell 2)	SS-RSRQ_73	All bands	SS-RSRQ_71
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_38+ FFS	n257, n258, n261	SS-RSRQ_34+ FFS
		n260	SS-RSRQ_33+ FFS
		n259	FFS
Highest reported value (Cell 2)	SS-RSRQ_76+ FFS	All bands	SS-RSRQ_72+ FFS

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

7.7.2.2 NR SA FR2-FR2 SS-RSRQ measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.7.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP measurement accuracy is within the specified limits for all bands.

7.7.2.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.7.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.2.2.

7.7.2.2.4 Test description

Two cells are configured in this test: Cell 1 is the NR FR2 serving cell and Cell 2 is the inter-frequency NR FR2 neighbour cell.

7.7.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.2.2.4.1-1.

Table 7.7.2.2.4.1-1: Supported test configurations

Configuration	Description
7.7.2.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.7.2.2.4.1-2.

Table 7.7.2.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 7.7.2.2.4.1-3.
2. Message contents are defined in clause 7.7.2.2.4.3.
3. There are two inter-frequency cells specified in the test, where Cell 1 is the serving cell on an NR FR2 carrier and Cell 2 is the neighbour cell on a different NR FR2 carrier and the target cell for the SS-RSRQ measurements.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.2.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 7.7.2.2.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport for the following requirements:

   - R1: The SS-RSRQ value of Cell 1 reported by the UE is compared to the expected SS-RSRQ for Cell 1. If the value is outside the limits in Table 7.7.2.2.5-3 or the UE fails to report the measurement value for Cell 1, the

number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

- R2: The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ for Cell 2. If the value is outside the limits in Table 7.7.2.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

- R3: The SS-RSRQ value of Cell 2 reported by the UE is compared to the reported SS-RSRQ of Cell 1. If the resulting value is outside the limits in Table 7.7.2.2.5-4 or the UE fails to report the measurement value for Cell 1 or Cell 2, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 7.7.2.2.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements:

- R4: The SS-RSRQ value of Cell 1 reported by the UE is compared to the expected SS-RSRQ for Cell 1. If the value is outside the limits in Table 7.7.2.2.5-3 or the UE fails to report the measurement value for Cell 1, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

- R5: The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ for Cell 2. If the value is outside the limits in Table 7.7.2.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R5 is increased by one. Otherwise, the number of passed iterations for R5 is increased by one.

- R6: The SS-RSRQ value of Cell 2 reported by the UE is compared to the reported SS-RSRQ of Cell 1. If the resulting value is outside the limits in Table 7.7.2.2.5-4 or the UE fails to report the measurement value for Cell 1 or Cell 2, the number of failed iterations for R6 is increased by one. Otherwise, the number of passed iterations for R6 is increased by one.

7.7.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.2.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-5 Table H.3.1-6 with condition Pattern #0 Table H.3.1-7 with condition INTER-FREQ Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.2.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
sinr	false		
}			
maxReportCells	2		
}			

}			
}			

7.7.2.2.5 Test requirement

Table 7.7.2.2.5-1 defines the cell specific settings for all tests. Table 7.7.2.2.5-2 defines the OTA primary level settings including test tolerances for all tests.

The SS-RSRQ measurement accuracy shall fulfil the absolute accuracy requirements in clause 7.7.2.0.2.1 and relative accuracy requirements in clause 7.7.2.0.2.2. The following eight requirements are to be verified:

During T1:

R1: Absolute accuracy of Cell 1. The UE is deemed to meet the requirement if the reported SS-RSRQ is in the range shown in Table 7.7.2.2.5-3.

R2: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRQ is in the range shown in Table 7.7.2.2.5-3.

R3: Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRQ meets the requirements in Table 7.7.2.2.5-4.

During T2:

R4: Absolute accuracy of Cell 1. The UE is deemed to meet the requirement if the reported SS-RSRQ is in the range shown in table 7.7.2.2.5-3.

R5: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRQ is in the range shown in table 7.7.2.2.5-3.

R6: Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRQ meets the requirements in Table 7.7.2.2.5-4.

Table 7.7.2.2.5-1: SS-RSRQ Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		Freq1	freq2	freq1	Freq2
SSB Configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		66		66	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1

SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void					

Table 7.7.2.2.5-2: SS-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		Setup 1		Setup 1	
Assumption for UE beams Note 8		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-95.93	-95.93	-95.44	-95.44
N_{oc} Note1	dBm/SCS Note3	-86.9	-86.9	-86.41	-86.41
$\hat{E}_s / N_{oc}$	dB	-1.75	-1.75	-3	-3
SSB_RP Note2	dBm/SCS Note4	-88.65	-88.65	-89.41	-89.41
SS-RSRQ Note2	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$	dB	-1.75	-1.75	-3	-3

Io[Note2]	dBm/95.04 MHz [Note4]	-55.7	-55.7	-55.7	-55.7

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Void
Note 7: Void
Note 8: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 7.7.2.2.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 1)	RSRQ_41	RSRQ_37
Highest reported value (Cell 1)	RSRQ_73	RSRQ_74
Lowest reported value (Cell 2)	RSRQ_41	RSRQ_37
Highest reported value (Cell 2)	RSRQ_73	RSRQ_74
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 1)	RSRQ_41 + FFS	RSRQ_37 + FFS
Highest reported value (Cell 1)	RSRQ_73 + FFS	RSRQ_74 + FFS
Lowest reported value (Cell 2)	RSRQ_41 + FFS	RSRQ_37 + FFS
Highest reported value (Cell 2)	RSRQ_73 + FFS	RSRQ_74 + FFS

Table 7.7.2.2.5-4: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest value (RSRQ report Cell 2 – RSRQ report Cell 1)	- 7	- 9
Highest value (RSRQ report Cell 2 – RSRQ report Cell 1)	+ 7	+ 9
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest value (RSRQ report Cell 2 – RSRQ report Cell 1)	– 7 + FFS	– 9 + FFS
Highest value (RSRQ report Cell 2 – RSRQ report Cell 1)	+ 7 + FFS	+ 9 + FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 to R6) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.3 SS-SINR

7.7.3.0 Minimum conformance requirements

7.7.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements

Same as in clause 5.7.3.0.1.

7.7.3.0.2 Inter-frequency SS-SINR measurement accuracy requirements

Same as in clause 5.7.3.0.2.

7.7.3.1 NR SA FR2 SS-SINR measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.7.3.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-SINR measurement accuracy is within the specified limits for all bands.

7.7.3.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting ss-SINR-Meas.

7.7.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.3.1.

7.7.3.1.4 Test description

Two cells are configured in this test: Cell 1 is the NR FR2 serving cell and Cell 2 is the intra-frequency NR FR2 neighbour cell.

7.7.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.3.1.4.1-1.

Table 7.7.3.1.4.1-1: Supported test configurations

Configuration	Description
7.7.3.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.7.3.1.4.1-2.

Table 7.7.3.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 7.7.3.1.4.1-3.
2. Message contents are defined in clause 7.7.3.1.4.3.
3. There are two intra-frequency cells specified in the test, where Cell 1 is the NR FR2 serving cell and Cell 2 is the neighbour cell on the same NR FR2 carrier and the target cell for the SS-SINR measurements.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.3.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 7.7.3.1.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic MeasurementReport. The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 7.7.3.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 7.7.3.1.5-1 as appropriate and repeat steps 5-7.

7.7.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.3.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition Synchronous cells Table H.3.1-5 Table H.3.1-7 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.3.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
rsrq	false		
}			
maxReportCells	2		
}			
}			
}			

7.7.3.1.5 Test requirement

Table 7.7.3.1.5-1 defines the cell specific settings for all tests. Table 7.7.3.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

Each SS-SINR measurement report for each of the tests in Table 7.7.3.1.5-2 shall meet the corresponding absolute accuracy requirements in Table 7.7.3.1.5-3.

Table 7.7.3.1.5-1: SS-SINR Intra frequency test parameters

Parameter	**Unit**	**Test 1**		**Test 2**	
		Cell 1	**Cell 2**	**Cell 1**	**Cell 2**
SSB ARFCN		**Freq2**		**Freq2**	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated RMSI CORESET Reference Channel		CCR.3 .1 TDD	-	CCR.3. 1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS EPRE ratio of PBCH_DMRS to SSS EPRE ratio of PBCH to PBCH_DMRS EPRE ratio of PDCCH_DMRS to SSS EPRE ratio of PDCCH to PDCCH_DMRS EPRE ratio of PDSCH_DMRS to SSS EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1	dB	0	0	0	0
Propagation condition		AWGN		AWGN	
Antenna Configuration		1x2		1x2	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void.
Note 3:	Void
Note 4:	Void

Table 7.7.3.1.5-2: SS-SINR Intra frequency OTA related test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration			Setup 1		Setup 1	
Assumption for UE beams Note 9			Rough		Rough	
N_{oc} Note1		dBm/15kHz Note4	-105		-105	
N_{oc} Note1		dBm/SCS Note3	-96		-96	
SSB_RP Note2		dBm/SCS Note4	-91.46	-93.34	-98.8	-98.8
SS-SINR Note2	n257, 258, n261	dB	-0.18	-3.32	-4.95	-4.95
	n260		-0.31	-3.42	-5.20	-5.20
	n259		-0.39	-3.48	-5.48	-5.48
$\hat{E}_s / I_{ot}$	n257, 258, n261	dB	-0.18	-3.32	-4.95	-4.95
	n260		-0.31	-3.42	-5.20	-5.20
	n259		-0.39	-3.48	-5.48	-5.48
$\hat{E}_s / N_{oc}$		dB	4.54	2.66	-3	-3
Io Note2		dBm/95.04 MHz Note4	-59.43		-63.87	

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-SINR and SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Void.
Note 7:	Void
Note 8:	Void
Note 9:	Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 7.7.3.1.5-3: SS-SINR Intra frequency absolute accuracy requirements for the reported values

UE Power Class 3	Test 1		Test 2	
Normal Conditions				
Lowest reported value (Cell 2)	n257, n258, n261	SS-SINR_22	All bands	SS-SINR_18
	n260	SS-SINR_21		
	n259	FFS		
Highest reported value (Cell 2)	All bands	SS-SINR_58	n257, n258, n261	SS-SINR_55
			n260	SS-SINR_54
			n259	FFS
Extreme Conditions				
Lowest reported value (Cell 2)	n257, n258, n261	SS-SINR_21+ FFS	All bands	SS-SINR_17+ FFS
	n260	SS-SINR_20+ FFS		
	n259	FFS		
Highest reported value (Cell 2)	All bands	SS-SINR_59+ FFS	n257, n258, n261	SS-SINR_56+ FFS

			n260	SS-SINR_55+ FFS
			n259	FFS

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

7.7.3.2 NR SA FR2-FR2 SS-SINR measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.7.3.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-SINR measurement accuracy is within the specified limits for all bands.

7.7.3.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards supporting ss-SINR-Meas.

7.7.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.3.2.

7.7.3.2.4 Test description

Two cells are configured in this test: Cell 1 is the NR FR2 serving cell and Cell 2 is the inter-frequency NR FR2 neighbour cell.

7.7.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.3.2.4.1-1.

Table 7.7.3.2.4.1-1: Supported test configurations

Configuration	Description
7.7.3.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.7.3.2.4.1-2.

Table 7.7.3.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1

Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 7.7.3.2.4.1-3.
2. Message contents are defined in clause 7.7.3.2.4.3.
3. There are two inter-frequency cells specified in the test, where Cell 1 is the serving cell on an NR FR2 carrier and Cell 2 is the neighbour cell on a different NR FR2 carrier and the target cell for the SS-SINR measurements.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.3.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 7.7.3.2.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic MeasurementReport for the following requirements:

   - R1: The SS-SINR value of Cell 1 reported by the UE is compared to the expected SS-SINR for Cell 1. If the value is outside the limits in Table 7.7.3.2.5-3 or the UE fails to report the measurement value for Cell 1, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

   - R2: The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR for Cell 2. If the value is outside the limits in Table 7.7.3.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   - R3: The SS-SINR value of Cell 2 reported by the UE is compared to the reported SS-SINR of Cell 1. If the resulting value is outside the limits in Table 7.7.3.2.5-4 or the UE fails to report the measurement value for Cell 1 or Cell 2, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 7.7.3.2.5-2 as appropriate and repeat steps 5-7. In Step 6, the SS shall check the following requirements for Test 2:

   - R4: The SS-SINR value of Cell 1 reported by the UE is compared to the expected SS-SINR for Cell 1. If the value is outside the limits in Table 7.7.3.2.5-3 or the UE fails to report the measurement value for Cell 1, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

   - R5: The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR for Cell 2. If the value is outside the limits in Table 7.7.3.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R5 is increased by one. Otherwise, the number of passed iterations for R5 is increased by one.

- R6: The SS-SINR value of Cell 2 reported by the UE is compared to the reported SS-SINR of Cell 1. If the resulting value is outside the limits in Table 7.7.3.2.5-4 or the UE fails to report the measurement value for Cell 1 or Cell 2, the number of failed iterations for R6 is increased by one. Otherwise, the number of passed iterations for R6 is increased by one.

And the following requirements for Test 3:

- R7: The SS-SINR value of Cell 1 reported by the UE is compared to the expected SS-SINR for Cell 1. If the value is outside the limits in Table 7.7.3.2.5-3 or the UE fails to report the measurement value for Cell 1, the number of failed iterations for R7 is increased by one. Otherwise, the number of passed iterations for R7 is increased by one.

- R8: The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR for Cell 2. If the value is outside the limits in Table 7.7.3.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations for R8 is increased by one. Otherwise, the number of passed iterations for R8 is increased by one.

- R9: The SS-SINR value of Cell 2 reported by the UE is compared to the reported SS-SINR of Cell 1. If the resulting value is outside the limits in Table 7.7.3.2.5-4 or the UE fails to report the measurement value for Cell 1 or Cell 2, the number of failed iterations for R9 is increased by one. Otherwise, the number of passed iterations for R9 is increased by one.

7.7.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.3.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table H.3.1-5 Table H.3.1-6 with condition Pattern #0 Table H.3.1-7 with condition INTER-FREQ Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.3.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
rsrq	false		
}			
maxReportCells	2		
}			
}			
}			

7.7.3.2.5 Test requirement

Table 7.7.3.2.5-1 defines the cell specific settings for all tests. Table 7.7.3.2.5-2 defines the OTA primary level settings including test tolerances for all tests.

The SS-SINR measurement accuracy shall fulfil the absolute accuracy requirements in clause 7.7.3.0.2.1 and relative accuracy requirements in clause 7.7.3.0.2.2. The following eight requirements are to be verified:

During Test 1:

R1: Absolute accuracy of Cell 1. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in Table 7.7.3.2.5-3.

R2: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in Table 7.7.3.2.5-3.

R3: Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-SINR meets the requirements in Table 7.7.3.2.5-4.

During Test 2:

R4: Absolute accuracy of Cell 1. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in table 7.7.3.2.5-3.

R5: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in table 7.7.3.2.5-3.

R6: Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-SINR meets the requirements in Table 7.7.3.2.5-4.

During Test 3:

R7: Absolute accuracy of Cell 1. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in table 7.7.3.2.5-3.

R8: Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-SINR is in the range shown in table 7.7.3.2.5-3.

R9: Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-SINR meets the requirements in Table 7.7.3.2.5-4.

Table 7.7.3.2.5-1: SS-SINR Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		66		66		66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1	SMTC.1	SMTC.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							

EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1							
Propagation conditions		AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna Configuration		1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: Void
Note 4: Void

Table 7.7.3.2.5-2: SS-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	degrees	Setup 1		Setup 1		Setup 1	
Assumption for UE beams Note 10		Rough		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105	-105	-105.1	-105.1	-105	-105
N_{oc} Note1	dBm/SCS Note3	-96	-96	-96.1	-96.1	-96	-96
$\hat{E}_s / N_{oc}$	dB	-0.5	-0.5	11	11	-2.1	-2.1
SS-RSRP Note2	dBm/SCS Note4	-96.5	-96.5	-85.1	-85.1	-98.1	-98.1
SS-SINR Note2	dB	-0.5	-0.5	11	11	-2.1	-2.1
$\hat{E}_s / I_{ot}$	dB	-0.5	-0.5	11	11	-2.1	-2.1
Io Note2	dBm/95.04 MHz Note4	-69.3	-69.3	-55.75	-55.75	-64.9	-64.9

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Void
Note 7: Void
Note 8: Void
Note 9: Void
Note 10: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 7.7.3.2.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5

UE power class 3						
Normal Conditions	**Test 1 All bands**		**Test 2 All bands**		**Test 3 All bands**	
Lowest reported value (Cell 1)	SINR_27		SINR_48		n257, n258, n261	SINR_23
					n260	SINR_22
					n259	FFS
Highest reported value (Cell 1)	n257, n258, n261	SINR_62	n257, n258, n261	SINR_87	n257, n258, n261	SINR_60
	n260	SINR_61	n260	SINR_86	n260	SINR_59
	n259	FFS	n259	FFS	n259	FFS
Lowest reported value (Cell 2)	SINR_27		SINR_48		n257, n258, n261	SINR_23
					n260	SINR_22
					n259	FFS
Highest reported value (Cell 2)	n257, n258, n261	SINR_62	n257, n258, n261	SINR_87	n257, n258, n261	SINR_60
	n260	SINR_61	n260	SINR_86	n260	SINR_59
	n259	FFS	n259	FFS	n259	FFS
Extreme Conditions	**Test 1 All bands**		**Test 2 All bands**		**Test 3 All bands**	
Lowest reported value (Cell 1)	SINR_27 + FFS		SINR_48 + FFS		n257, n258, n261	SINR_23 + FFS
					n260	SINR_22 + FfS
					n259	FFS
Highest reported value (Cell 1)	n257, n258, n261	SINR_62 + FFS	n257, n258, n261	SINR_87 + FFS	n257, n258, n261	SINR_60 + FFS
	n260	SINR_61 + FFS	n260	SINR_86 + FFS	n260	SINR_59 + FFS
	n259	FFS	n259	FFS	n259	FFS
Lowest reported value (Cell 2)	SINR_27 + FFS		SINR_48 + FFS		n257, n258, n261	SINR_23 + FFS
					n260	SINR_22 + FfS
					n259	FFS
Highest reported value (Cell 2)	n257, n258, n261	SINR_62 + FFS	n257, n258, n261	SINR_87 + FFS	n257, n258, n261	SINR_60 + FFS
	n260	SINR_61 + FFS	n260	SINR_86 + FFS	n260	SINR_59 + FFS
	n259	FFS	n259	FFS	n259	FFS

Table 7.7.3.2.5-4: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest value (SINR report Cell 2 – SINR report Cell 1)	- 8	- 17	- 9
Highest value (SINR report Cell 2 – SINR report Cell 1)	+ 8	+ 17	+ 9
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest value (SINR report Cell 2 – SINR report Cell 1)	– 8 + FFS	– 17 + FFS	– 9 + FFS
Highest value (SINR report Cell 2 – SINR report Cell 1)	+ 8 + FFS	+ 17 + FFS	+ 9 + FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 to R6) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.4 L1-RSRP

7.7.4.0 Minimum conformance requirements

7.7.4.0.1 SSB-based L1-RSRP absolute measurement accuracy requirements

Same as in clause 5.7.4.0.1.

7.7.4.0.2 SSB-based L1-RSRP relative measurement accuracy requirements

Same as in clause 5.7.4.0.2.

7.7.4.0.3 CSI-RS-based L1-RSRP absolute measurement accuracy requirements

Same as in clause 5.7.4.0.3.

7.7.4.0.4 CSI-RS-based L1-RSRP relative measurement accuracy requirements

Same as in clause 5.7.4.0.4.

7.7.4.1 NR SA FR2 SSB based L1-RSRP measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.7.4.1.1 Test purpose

The purpose of this test is to verify that the SSB based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

7.7.4.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.7.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.4.0.1 and 7.7.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.4.1.

7.7.4.1.4 Test description

7.7.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.4.1.4.1-1.

Table 7.7.4.1.4.1-1: Supported test configurations

Test Case ID	Description
7.7.4.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.7.4.1-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.7.4.1.4.1-2.

Table 7.7.4.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.7.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.7.4.1.4.3.

2. Cell 1 is the NR FR2 cell and the target for SSB-based L1-RSRP measurements. The UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The connection setup is done according to the settings in Annex C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.4.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in Table 7.7.4.1.5-1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.7.4.1.5-1.

3. After 320 ms from the beginning of T1, the UE shall start sending L1-RSRP report including results of both SSB#0 and SSB#1 every 80 slots.

4. The UE shall start sending valid L1-RSRP reports, a valid report shall meet the absolute L1-RSRP requirement for SSB#0 and the relative L1-RSRP requirement for SSB#1. The SS shall check following requirements:

   - R1: The L1-RSRP value of SSB#0 reported by the UE is compared to the expected L1-RSRP value for SSB#0. If the value is outside the limits in Table 7.7.4.1.5-3, Table 5.7.4.1.5-3a or Table 7.7.4.1.5-4 (depending on the test configuration) or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

   - R2: The DIFF-RSRP value of SSB#1 reported by the UE is compared to the expected DIFF-RSRP value. If the resulting value is outside the limits in Table 5.7.1.1.5-5 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to T2 Table 7.7.4.1.5-1 and repeat steps 3-5. In Step 4, The SS shall check the L1-RSRP reported values of SSB#0 and SSB#1 in the periodic L1-RSRP reports for the following requirements.

   - R3: The L1-RSRP value of SSB#0 or SSB#1 reported by the UE is compared to the expected L1-RSRP value. If the value is outside the limits in Table 7.7.4.1.5-3, Table 5.7.4.1.5-3b or Table 7.7.4.1.5-4 (depending on the test configuration) or the UE fails to report the measurement value for SSB#0 or SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   - R4: The DIFF-RSRP value of SSB#0 or SSB#1 reported by the UE is compared to the expected DIFF-RSRP value. If the resulting value is outside the limits in Table 5.7.1.1.5-5 or the UE fails to report the

measurement value for SSB#0 or SSB#1, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

7.7.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.4.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with conditions SSB and PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.4.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

7.7.4.1.5 Test requirement

Table 7.7.4.1.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 7.7.4.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 7.7.4.1.5-3 for test configurations 1, and the corresponding absolute accuracy requirements in Table 7.7.4.1.5-4 for test configurations 2 and Table 7.7.4.1.5-3a for all configurations.

Table 7.7.4.1.5-1: L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1,2		freq1	freq1
Duplex mode	1,2		TDD	TDD
TDD Configuration	1,2		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1,2	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Data RBs allocated	1,2		66	66
PDSCH Reference measurement channel	1		SR.3.2 TDD	SR.3.2 TDD
	2		SR.3.3 TDD	SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
	2		CR.3.2 TDD	CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
	2		CCR.3.7 TDD	CCR.3.7 TDD

SSB configuration	1		SSB.1 FR2	SSB.1 FR2
	2		SSB.2 FR2	SSB.2 FR2
OCNG Patterns	1,2		OP.1	OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
TRS Configuration	1,2		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1,2		TCI.State.2	TCI.State.2
SMTC configuration	1,2		SMTC.1	SMTC.1
reportConfigType	1,2		periodic	periodic
reportQuantity	1,2		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1,2		2	2
L1-RSRP reporting period	1,2		slot320	slot320
Propagation condition	1,2		AWGN	AWGN
Antenna configuration			1x2	1x2
EPRE ratio of PSS to SSS	1,2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 7.7.4.1.5-2: L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			SSB0	SSB1	SSB0	SSB1
Angle of arrival configuration			Setup 1 according to A.9.1		Setup 1 according to A.9.1	
Assumption for UE beams Note 4			Rough		Rough	
N_{oc}	1,2	dBm/15 kHz	-104.1		n.a.	
N_{oc}	1	dBm/SSB SCS	-95.1		n.a.	
	2		-92.1		n.a.	
$\hat{E}_s / I_{ot}$	1,2	dB	10	-1.6	n.a.	
SSB_RP Note1	1	dBm/SCS	-85.1	-96.9	As in Table B.2.4-2 + 5.7	
	2		-78	-90	As in Table B.2.4-2 + 5.7	
Io Note1	1,2	dBm/95.04MHz	-55.67		SSB_RP+34.68	
$\hat{E}_s / N_{oc}$	1,2	dB	10	-1.6	n.a.	

Note 1:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 2:	Void
Note 3:	No additional noise is added by the test system in Test 2.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 7.7.4.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 for the absolute accuracy rules R1, R3

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (SSB#0)	42	n257, n258, n261	27
		n260	30
		n259	FFS
Highest reported value (SSB#0)	101	n257, n258, n261	83
		n260	86
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (SSB#0)	39 + FFS	n257, n258, n261	24 + FFS
		n260	27 + FFS
		n259	FFS
Highest reported value (SSB#0)	104 + FFS	n257, n258, n261	86 + FFS
		n260	89 + FFS
		n259	FFS

Table 7.7.4.1.5-3a: evaluation limits for the Δ(Max-Min) reported values for SSB#0 for rules R1

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0	18 + FFS	18+ FFS

Table 7.7.4.1.5-3b: evaluation limits for the Δ(Max-Min) reported values for SSB#0 or SSB#1 for rules R3

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0 or SSB#1	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0 or SSB#1	18 + FFS	18+ FFS

Table 7.7.4.1.5-4: L1-RSRP absolute accuracy requirements for the reported values for test configurations 2 for the absolute accuracy rules R1, R3

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value	45	n257, n258, n261	30
		n260	33
		n259	FFS

Highest reported value	104	n257, n258, n261	86
		n260	89
		n259	FFS
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value	42+ FFS	n257, n258, n261	27 + FFS
		n260	30 + FFS
		n259	FFS
Highest reported value	107+ FFS	n257, n258, n261	89 + FFS
		n260	92 + FFS
		n259	FFS

Table 7.7.4.1.5-5: evaluation limits for the reported values for T1 and T2 relative accuracy rules R2, R4

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest DIFF RSRP reported value	2	0
Highest DIFF RSRP reported value	9	4
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest DIFF RSRP reported value	0+ FFS	0+ FFS
Highest DIFF RSRP reported value	12+ FFS	7+ FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 to R6) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.4.2 NR SA FR2 CSI-RS based L1-RSRP measurement accuracy

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.7.4.2.1 Test purpose

The purpose of this test is to verify that the CSI-RS based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

7.7.4.2.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

7.7.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.4.0.3 and 7.7.4.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.4.1.

7.7.4.2.4 Test description

7.7.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.4.2.4.1-1.

Table 7.7.4.2.4.1-1: Supported test configurations

Test Case ID	Description
7.7.4.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 7.7.4.2.4.1-2.

Table 7.7.4.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 7.7.4.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.7.4.2.4.3.

2. Cell 1 is the NR FR2 cell and the target for CSI-RS-based L1-RSRP measurements. The UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The connection setup is done according to the settings in Annex C.1.1.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.4.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.7.4.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.7.4.2.5-1.

3. After 320 ms from the beginning of T1, the UE shall start sending L1-RSRP report including results of both CSI-RS0 and CSI-RS1.

4. The UE shall start sending valid L1-RSRP reports, a valid report shall meet the absolute L1-RSRP requirement for CSI-RS0 and the relative L1-RSRP requirement for CSI-RS1. The SS shall check for the following requirements:

   - R1: The L1-RSRP value of CSI-RS0 reported by the UE is compared to the expected L1-RSRP value for CSI-RS0. If the value is outside the limits in Table 7.7.4.2.5-3, Table 5.7.4.2.5-3a or Table 7.7.4.2.5-4 (depending on the test configuration) or the UE fails to report the measurement value for CSI-RS0, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

   - R2: The DIFF-RSRP value of CSI-RS1 reported by the UE is compared to the expected DIFF-RSRP value. If the resulting value is outside the limits in Table 7.7.4.2.5-4 or the UE fails to report the measurement value for or CSI-RS1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to T2 Table 7.7.4.2.5-1 and repeat steps 3-5. In Step 4, the SS shall check the L1-RSRP reported values of CSI-RS0 and CSI-RS1 in the periodic L1-RSRP reports for the following requirements.

   - R3: The L1-RSRP value of CSI-RS0 or CSI-RS1 reported by the UE is compared to the expected L1-RSRP value. If the value is outside the limits in Table 7.7.4.2.5-3, Table 5.7.4.2.5-3b or Table 7.7.4.2.5-4 (depending on the test configuration) or the UE fails to report the measurement value for CSI-RS0 or CSI-RS1, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   - R4: The DIFF-RSRP value of CSI-RS0 or CSI-RS1 reported by the UE is compared to the expected DIFF-RSRP value. If the resulting value is outside the limits in Table 7.7.4.2.5-4 or the UE fails to report the measurement value for CSI-RS0 or CSI-RS1, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

7.7.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.4.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.6-2 with conditions PERIODIC and CSI-RSRP Table H.3.6-3 with conditions CSI-RS and PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.4.2.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
csi-RS-Index	0		
}			
}			
}			

7.7.4.2.5 Test requirement

Table 7.7.4.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 7.7.4.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 7.7.4.2.5-2 for test configurations 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 7.7.4.2.5-3 for test configurations 3 and 6 and Table 7.7.4.2.5-3a for all configurations.

Table 7.7.4.2.5-1: L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1		freq1	freq1
Duplex mode	1		TDD	TDD

TDD Configuration	1		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2	SSB.1 FR2
OCNG Patterns	1		OP.1	OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
TRS Configuration	1		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2	TCI.State.2
SMTC configuration	1		SMTC.1	SMTC.1
CSI-RS	1		CSI-RS.3.2 TDD	CSI-RS.3.2 TDD
reportConfigType	1		periodic	periodic
reportQuantity	1		cri-RSRP	cri-RSRP
Number of reported RS	1		2	2
L1-RSRP reporting period	1		slot320	slot320
Propagation condition	1		AWGN	AWGN
Antenna configuration	1		1x2	1x2
EPRE ratio of PSS to SSS	1	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 7.7.4.2.5-2: L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			CSI-RS0	CSI-RS1	CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.9.1		Setup 1 according to A.9.1	
Assumption for UE beams Note 4			Rough		Rough	
N_{oc}	1	dBm/15 kHz	-104.10		n.a.	
N_{oc}	1	dBm/SSB SCS	-95.11		n.a. n.a.	
$\hat{E}_s / I_{ot}$	1	dB	10	-1.8	n.a.	
CSI-RS_RP Note1	1	dBm/SCS	-85.11	-96.93	As in Table B.2.4.2-2 + 5.7	

Io[Note1]	1	dBm/ 95.04M Hz	-55.67		CSI-RS_RP+34.68
$\hat{E}_s / N_{oc}$	1	dB	10	-1.82	n.a.
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

Table 7.7.4.2.5-3: L1-RSRP absolute accuracy requirements for the reported values for the absolute accuracy rules R1, R3

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (CSI-RS0)	42	n257, n258, n261	27
		n260	30
		n259	FFS
Highest reported value (CSI-RS0)	101	n257, n258, n261	83
		n260	86
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (CSI-RS0)	39+ FFS	n257, n258, n261	25 + FFS
		n260	27 + FFS
		n259	FFS
Highest reported value (CSI-RS0)	104+ FFS	n257, n258, n261	86 + FFS
		n260	89 + FFS
		n259	FFS

Table 7.7.4.2.5-3a: evaluation limits for the Δ(Max-Min) reported values for CSI-RS#0 for rules R1

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0	18 + FFS	18+ FFS

Table 7.7.4.2.5-3b: evaluation limits for the Δ(Max-Min) reported values for CSI-RS#0 or CSI-RS#1 for rules R3

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0 or CSI-RS#1	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0 or CSI-RS#1	18 + FFS	18+ FFS

Table 7.7.4.2.5-4: evaluation limits for the reported values for T1 and T2 relative accuracy rules R2, R4

UE power class 3

Normal Conditions	Test 1 All bands	Test 2 All bands
Lowest DIFF RSRP reported value	2	0
Highest DIFF RSRP reported value	9	4
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest DIFF RSRP reported value	0+ FFS	0+ FFS
Highest DIFF RSRP reported value	12+ FFS	7+ FFS

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.5 SRS-RSRP

7.7.5.0 Minimum conformance requirements

7.7.5.0.1 Minimum conformance requirements for SRS-RSRP measurement accuracy

The SRS-RSRP measurement reported by the UE shall fulfil the accuracy requirements defined in Table 7.7.5.0.1-1 for FR1 and Table 5.7.7.0.1-2 for FR2, provided that the following conditions are met. The accuracy requirements in this clause are derived based on AWGN radio propagation conditions.

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for SRS-RSRP measurements are fulfilled according to Annex B.2.z for a corresponding Band for each relevant SRS resource configured for measurement.
- The time difference between UE's DL reference timing in the serving cell and SRS arrival time is no larger than $T_{error_SRS_RSRP}$, where
  - $T_{error_SRS_RSRP} = T_C \times N_{TA_offset}$ + 4.67us for FR1
  - $T_{error_SRS_RSRP} = T_C \times N_{TA_offset}$ + 3.67us for FR2
  - N_{TA_offset} is defined in Table 7.1.2-2
  - T_C is 0.509ns
- The number of SRS ports in the SRS resource configured for measurement is 1,
- The number of symbols in the SRS resource configured for measurement is 1,
- The number of repetitions in the SRS resource configured for measurement is 1,
- Frequency hopping, sequence group hopping or sequence hopping is disabled in the SRS resource configured for measurement,
- The bandwidth of the SRS resource is 48 PRBs.
- One of the following conditions is met
  - There is no other SRS resource with the same root sequence and on the same symbol and with same comb as the relevant SRS resource.
  - If multiple SRS resources are on the same symbol and with same comb, the distance between cyclic shifts of any two resources is no less than 6 if transmissionComb = n4, and no less than 4 if transmissionComb = n2.

Table 7.7.5.0.1-1: SRS-RSRP absolute accuracy in FR1

Accuracy	Conditions

Normal condition			Extreme condition			SRS Ês/Iot	Io [Note 1] range					
							NR operating band groups [Note 2]	Minimum Io				Maximum Io
dB						dB		dBm / SCS_{SRS}			dBm/BW Channel	dBm/BW Channel
SCS_{SRS} (kHz)			SCS_{SRS} (kHz)					SCS_{SRS} = 15 kHz	SCS_{SRS} = 30 kHz	SCS_{SRS} = 60 kHz		
15	30	60	15	30	60							
±3	±3.5	±5	±7.5	±8	±9.5	≥1	NR_TDD_FR1_A,	-120	-117	-114	N/A	-70
							NR_TDD_FR1_C	-119	-116	-113	N/A	-70
							NR_TDD_FR1_D	-118.5	-115.5	-112.5	N/A	-70
							NR_TDD_FR1_E	-118	-115	-112	N/A	-70
±6.5	±7	±8.5	±9.5	±10	±11.5	≥1	NR_TDD_FR1_A, NR_TDD_FR1_C, NR_TDD_FR1_D, NR_TDD_FR1_E	N/A	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

Table 7.7.5.0.1-2: SRS-RSRP absolute accuracy in FR2

Accuracy				Conditions			
Normal condition		Extreme condition		SRS Ês/Iot	Io [Note 1] range		
					Minimum Io		Maximum Io
dB				dB	dBm / SCS_{SRS} [Note 2]		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
SCS_{SRS} (kHz)		SCS_{SRS} (kHz)			SCS_{SRS} = 60kHz	SCS_{SRS} = 120kHz		
60	120	60	120					
±6	±8.5	±9	±11.5	≥1	Same value as SRS_RP in Table B.2.7-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±9	±11.5	±11	±13.5	≥1	N/A		-70	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

7.7.5.0.1.1 SRS-RSRP report mapping

The reporting range of SRS-RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution. The mapping of measured quantity is defined in Table 5.7.7.0.1.2-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 5.7.7.0.1.2-1: SRS-RSRP measurement report mapping

Reported value	Measured quantity value	Unit
SRS-RSRP_0	SRS-RSRP<-140	dBm
SRS-RSRP_1	-140≤ SRS-RSRP<-139	dBm
SRS-RSRP_2	-139≤ SRS-RSRP<-138	dBm
SRS-RSRP_3	-138≤ SRS-RSRP<-137	dBm
SRS-RSRP_4	-137≤ SRS-RSRP<-136	dBm
..	..	…
SRS-RSRP_95	-46≤ SRS-RSRP<-45	dBm
SRS-RSRP_96	-45≤ SRS-RSRP<-44	dBm
SRS-RSRP_97	-44≤ SRS-RSRP	dBm
SRS-RSRP_98	Infinity	
Note: 'Infinity' means that UE cannot detect SRS due to too strong signal to measure.		

The normative reference for this requirement is TS 38.133 [6] clause 10.1.22.1.

7.7.5.1 NR SA FR2 SRS-RSRP measurement accuracy

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD

- The test procedure is incomplete

- The message content is FFS

- MU/TT analysis for UE PC3 and test frequency f ≤ 40.8 GHz is complete.

- MU/TT analysis for UE power class other than PC3 is incomplete.

- MU//TT analysis for test frequency f > 40.8 GHz is incomplete.

7.7.5.1.1 Test purpose

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits with SRS-RSRP measurement requirements in TS 38.133 [6] clause 10.1.22.1.1.

7.7.5.1.2 Test applicability

This test applies to all types of NR UE release 16 onwards and supporting CLI-SRS-RSRP.

7.7.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.5.1.

7.7.5.1.4 Test description

7.7.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.5.1.4.1-1.

Table 7.7.5.1.4.1-1: Applicable NR configurations for FR2 SRS-RSRP accuracy test

Config	Description
1	120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 7.7.5.1.4.1-2.

Table 7.7.5.1.4.1-2: Initial conditions SA FR2 SRS-RSRP measurement accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.7.5.1.4.3.
2. In this set of test cases there is one cell in the test, FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table 7.7.5.1.5-1 and Table 7.7.5.1.5-2 below. The test parameter for the (virtual) neighbour cell UE transmitting SRS are given in Table 7.7.5.1.5-2.
3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.5.1.4 Test description

7.7.5.1.4.1 Initial conditions

7.7.5.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 7.7.5.1.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.

<rest of the steps are FFS >

7.7.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

FFS

7.7.5.1.5 Test requirement

Table 7.7.5.1.5-1 defines the cell specific settings for all tests. Table 7.7.5.1.5-2 defines the OTA primary level settings including test tolerances for all tests.

Table 7.7.5.1.5-1: FR2 test parameters for SRS-RSRP accuracy

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1		freq1	freq1
Duplex mode	1		TDD	TDD
TDD configuration	1		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD	SR.3.1 TDD

RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1		SSB.3 FR2	SSB.3 FR2
OCNG Patterns	1		OP.1	OP.1
TRS configuration	1		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTC configuration	1		SMTC.1	SMTC.1
Time offset between DL from serving cell and SRS from test system	1	μs	10.76	10.67
EPRE ratio of PSS to SSS	1	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1		AWGN	AWGN
Antenna configuration	1		1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table 7.7.5.1.5-2: SRS-RSRP accuracy OTA related test parameters for PCell and Neighbour cell UE in FR2

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.9.1	Setup 1 defined A.9.1
Beam assumption Note 5		Fine	Fine
N_{oc} Note1	dBm/15kHz Note3	-100	N/A
N_{oc} Note1	dBm/SCS Note3	-91	N/A
$\hat{E}_s / N_{oc}$	dB	2	N/A
E_s	dBm/SCS Note3		(Table B.2.7-2 Rx Beam Peak) +5
SRS_RP Note2	dBm/SCS	-89	(Table B.2.7-2 Rx Beam Peak) +5
$\hat{E}_s / I_{ot\ BB}$ Note4	dB	>1	1
Io Note2	dBm/95.04 MHz Note3	-57.89	(Table B.2.7-2 Rx Beam Peak +50.79dB)
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Note 2:	SRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 4:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Table 7.7.5.1.5-3: SRS configuration parameters for FR2 SRS-RSRP accuracy

	Field	SRSConf.1
SRS-ResourceSet	srs-ResourceSetId	0
	srs-ResourceIdList	0
	resourceType	Periodic
	Usage	Codebook
SRS-Resource	SRS-ResourceId	0
	nrofSRS-Ports	Port1
	transmissionComb	n2
	combOffset-n2	0
	cyclicShift-n2	0
	resourceMapping startPosition	0
	resourceMapping nrofSymbols	n1
	resourceMapping repetitionFactor	n1
	freqDomainPosition	0
	freqDomainShift	0
	freqHopping c-SRS	12
	freqHopping b-SRS	0
	freqHopping b-hop	0
	groupOrSequenceHopping	Neither
	resourceType	Periodic
	periodicityAndOffset-p	sl160,25
	sequenceId	0

Table 7.7.5.1.5-4: SRS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
SRS	SRS_RP -δ +G_{min} ≤ Reported SRS-RSRP(dBm) ≤SRS_RP +δ +G_{max}
Note 1:	SRS_RP is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

The SRS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 7.7.5.0. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table 7.7.5.1.5-4.

During T2:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table 7.7.5.1.5-4.

For the test to pass, the ratio of successful reported values for each requirement shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.5.2 NR SA FR2 CLI-RSSI measurement accuracy

Editor's Note: This test case is incomplete. Following aspects are either missing or TBD

- The test procedure is incomplete

- The message content is FFS

- TT analysis is missing.

7.7.5.2.1 Test purpose

The purpose of this test is to verify that the CLI-RSSI measurement accuracy is within the specified limits with CLI-RSSI measurement requirements in TS 38.133 [6] clause 10.1.22.2.1.

7.7.5.2.2 Test applicability

This test applies to all types of NR UE release 16 onwards and supporting CLI-RSSI.

7.7.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.5.2.

7.7.5.2.4 Test description

7.7.5.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.5.2.4.1-1.

Table 7.7.5.2.4.1-1: Applicable NR configurations for FR2 CLI-RSSI accuracy test

Config	Description
1	120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 7.7.5.2.4.1-2.

Table 7.7.5.2.4.1-2: Initial conditions SA FR2 CLI-RSSI measurement accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 6.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 7.7.5.2.4.3.

2. In this set of test cases there is one cell in the test, FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table 7.7.5.2.5-1 and Table 7.7.5.2.5-2 below. The test parameter for the (virtual) neighbour cell UE transmitting SRS are given in Table 7.7.5.2.5-2.

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.5.2.4 Test description

7.7.5.2.4.1 Initial conditions

7.7.5.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 7.7.5.2.5-1 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.

<rest of the steps are FFS >

7.7.5.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

FFS

7.7.5.2.5 Test requirement

Table 7.7.5.2.5-1 defines the cell specific settings for all tests. Table 7.7.5.2.5-2 defines the OTA primary level settings including test tolerances for all tests.

Table 7.7.5.2.5-1: : FR2 test parameters for CLI-RSSI accuracy

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1		freq1	freq1
Duplex mode	1		TDD	TDD
TDD configuration	1		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1		SSB.3 FR2	SSB.3 FR2
OCNG Patterns Note2	1		OP.1	OP.1
TRS configuration	1		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTC configuration	1		SMTC.1	SMTC.1
Time offset between DL from serving cell and OCNG from test system	1	μs	10.67	10.67
EPRE ratio of PSS to SSS	1	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				

EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1		AWGN	AWGN
Antenna configuration	1		1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: OCNG is not transmitted in the CLI-RSSI measurement resources.				

Table 7.7.5.2.5-2: CLI-RSSI accuracy OTA related test parameters

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.9.1	
Beam assumption Note 5		Fine	
N_{oc} on CLI-RSSI measurement resource Note1	dBm/15kHz Note3	-100+TT	
N_{oc} on CLI-RSSI measurement resource Note1	dBm/SCS Note3	-91	
$\hat{E}_s / N_{oc}$ on CLI-RSSI measurement resource	dB	-Infinity	
RSRP on CLI-RSSI measurement resource Note2	dBm/SCS	-Infinity	
$\hat{E}_s / I_{otBB}$ on CLI-RSSI measurement resource Note4	dB	-Infinity	
Io on CLI-RSSI measurement resource Note2	dBm/95.04 MHz Note3	-62.01	
Io on CLI-RSSI measurement resource Note2	dBm/1.08 MHz	-81.46	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Table 7.7.5.2.5-3: CLI-RSSI measurement resource configuration for FR2 CLI-RSSI accuracy

	Field	SRSConf.1
CLI-RSSI measurement resource	rssi-ResourceId	0
	rssi-SCS	120kHz
	startPRB	0
	nrofPRBs	66

	startPosition	3
	nrofSymbols	11
	rssi-PeriodicityAndOffset	sl160, 25

Table 7.7.5.2.5-4: CLI-RSSI absolute accuracy test requirement

	Test requirement Notes1,2,3
	Io -δ +G_{min} ≤ Reported CLI-RSSI(dBm) ≤Io +δ +G_{max}
Note 1:	Io is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for 1.08MHz
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the Io used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

The CLI-RSSI measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.22.2.1. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table 7.7.5.2.5-4.

During T2:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table 7.7.5.2.5-4.

7.7.6 L1-SINR

7.7.6.0 Minimum conformance requirements

7.7.6.0.1 Minimum conformance requirements for CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off

Dedicated resource configured as IMR for L1-SINR computation, and the UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ is defined in Table 7.7.6.0.1-1 for FR2, where

For the value of M,

- For periodic and semi-persistent CSI-RS resources as CMR, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise;
- For aperiodic CSI-RS resources as CMR, M=1.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or

- another CSI-RS in resource set configured with repetition ON.

- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with

  - SSB for L1-RSRP or L1-SINR measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured for all resources in the resource set.

For the value of P in FR2,

- P=1, when CSI-RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is not overlapped with SMTC occasion (T_{CSI-RS} < MGRP)

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).

- P=3, when CSI-RS is not overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MRGP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} < 0.5*T_{SMTCperiod}$

- $P=\frac{3}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{CSI-RS} = 0.5*T_{SMTCperiod}$

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{\min(T_{SMTCperiod},MGRP)}}$, when CSI-RS is partially overlapped with measurement gap (T_{CSI-RS} < MGRP) and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.

- $P=\frac{3}{1-\frac{T_{CSI-RS}}{MRGP}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod}$ < MGRP)

Where:

$T_{SMTCperiod}$ = the configured SMTC1 period or SMTC2 period if configured.

T_{CSI-RS} = the periodicity of CSI-RS configured for L1-SINR measurement

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Note: The overlap between CSI-RS for L1-SINR measurement and SMTC means that CSI-RS for L1-SINR measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 7.7.6.0.1-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_Only}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P*N)*$T_{CSI\text{-}RS}$)
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P*N)*max(T_{DRX},$T_{CSI\text{-}RS}$))
DRX cycle > 320ms	ceil(M*P*N)*T_{DRX}
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	

The accuracy requirements in Table 7.7.6.0.1-3 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS as CMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 7.7.6.0.1-3.

Table 7.7.6.0.1-3: L1-SINR absolute accuracy for CSI-RS based CMR only in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 3	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / $SCS_{CSI\text{-}RS}$ Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			$SCS_{CSI\text{-}RS}$ = 60kHz / $SCS_{CSI\text{-}RS}$ = 120kHz		
±5.5	±6.5	≥-3	Same value as CSI-RS_RP in Table in B.2.8.1, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the CSI-RS CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

The normative reference for this requirement is TS 38.133 [6] clauses 9.8.4.1 and 10.1.28.1.

7.7.6.0.2 Minimum conformance requirements for SSB based CMR and dedicated IMR L1-SINR measurement accuracy

The UE shall be capable of performing L1-SINR measurements with the SSB configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as

dedicated IMR shall be 1-to-1 mapped to SSB configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as SSB configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ is defined in Table 7.7.6.0.2-1 for FR2, where

For the value of M

- For periodic or semi-persistent NZP CSI-RS or CSI-IM resource as dedicated IMR, M=1 if the higher layer parameters *timeRestrictionForChannelMeasurements* and/or *timeRestrictionForInterferenceMeasurements* are configured, and M=3 otherwise;

For the value of N in FR2

- N = 8.

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- the value of P_{CMR} shall be derived in the same way as the value of P used for SSB based L1-RSRP measurement in clause 9.5.4.1, in which the occasions and period of the SSB for CMR shall be used instead.

- the value of P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2, in which the occasions and period of the NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with SSB as CMR and CSI-RS or CSI-IM as IMR, the requirement shall apply if the CSI-RS is configured as IMR with repetition field as “repetition = OFF” or CSI-IM is configured as IMR.

For L1-SINR measurement with SSB as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if SSB occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap

Table 7.7.6.0.2-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(1.5*M*P*N)*T_{DRX}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.	

The accuracy requirements in Tables 7.7.6.0.2-2 and 7.7.6.0.2-3 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.

- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

- AWGN radio propagation conditions.

- SSB based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 7.7.6.0.2-2 and 7.7.6.0.2-3.

Table 7.7.6.0.2-2: L1-SINR absolute accuracy for SSB based CMR and NZP-IMR in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	SSB CMR Ês/Iot Note 3	NZP-IMR Ês/Iot Note 3	Io Note 1 range		
				Minimum Io		Maximum Io
dB	dB	dB	dB	dBm / SCS_{SSB} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±4.0	±5.0	≥0	≥0	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival	N/A	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the SSB Ês/Iot, NZP-IMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

Table 7.7.6.0.2-3: L1-SINR absolute accuracy for SSB based CMR and ZP-IMR in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB CMR Ês/Iot Note 3	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{SSB} Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	
±4.5	±5.5	≥-3	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival	N/A	-50

NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the SSB CMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

The normative reference for this requirement is TS 38.133 [6] clauses 9.8.4.2 and 10.1.28.2.

7.7.6.0.3 Minimum conformance requirements for CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy

The UE shall be capable of performing L1-SINR measurements with the CSI-RS resource configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to CSI-RS resource configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as CSI-RS resource configured as CMR.

The value of $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ is defined in Table 7.7.6.0.3-2 for FR2, where

For the value of M,

- M=1 shall be applied if
  - aperiodic NZP-CSI-RS as CMR or dedicated IMR, or
  - aperiodic CSI-IMR as dedicated IMR, or
  - periodic and semi-persistent NZP-CSI-RS as CMR or dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured, or
  - periodic and semi-persistent CSI-IM as dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured;
- M=3 otherwise.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with
  - SSB for L1-RSRP or L1-SINR measurement, or
  - another CSI-RS in resource set configured with repetition ON.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured for all resources in the resource set.

P is defined as the maximum value between P_{CMR} and P_{IMR}, i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- The value of P_{CMR} and P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2, in which the occasions and period of the CSI-RS for CMR and NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead respectively.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS as IMR, the requirement shall apply only if CSI-RS resources as CMR and IMR are configured with the same repetition field and the number of CSI-RS resources in the resource sets for CMR and IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-IM as IMR, the requirement shall apply only if the number of CSI-RS resources in the resource set for CMR and the number of CSI-IM resources in the resource set for IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if CSI-RS occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap.

Table 7.7.6.0.3-1: Measurement period $T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ for FR2

Configuration	$T_{L1\text{-}SINR_Measurement_Period_CSI\text{-}RS_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P*N)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P*N)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P*N)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3. Note 3: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to CSI-RS configured for channel measurement, with the same periodicity.	

The accuracy requirements in Tables 7.7.6.0.3-2 and 7.7.6.0.3-3 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.
- CSI-RS based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 7.7.6.0.3-2 and 7.7.6.0.3-3.

Table 7.7.6.0.3-2: L1-SINR absolute accuracy for CSI-RS based CMR and NZP-IMR in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 3	NZP-IMR Ês/Iot Note 3	Io Note 1 range		
				Minimum Io		Maximum Io
dB	dB	dB	dB	dBm / $SCS_{CSI\text{-}RS}$ Note 2	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				$SCS_{CSI\text{-}RS}$ = 60kHz	$SCS_{CSI\text{-}RS}$ = 120kHz	
±4.0	±5.0	≥0	≥0	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival	N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.						

NOTE 2:	Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 3:	In the test cases, the CSI-RS Ês/Iot, NZP-IMR Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

Table 7.7.6.0.3-3: L1-SINR absolute accuracy for CSI-RS based CMR and ZP-IMR in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS CMR Ês/Iot Note 3	Io Note 1 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 2		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz		
±4.5	±5.5	≥-3	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival		N/A	-50
NOTE 1:	Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
NOTE 2:	Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
NOTE 3:	In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.					

The normative reference for this requirement is TS 38.133 [6] clauses 9.8.4.3 and 10.1.28.3.

7.7.6.1 NR SA FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The test is incomplete for test frequencies > 40.8 GHz

7.7.6.1.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

7.7.6.1.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards. Applicability requires support of L1-SINR measurements.

7.7.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.6.1.

7.7.6.1.4 Test description

7.7.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.6.1.4.1-1.

Table 7.7.6.1.4.1-1: Applicable NR configurations for FR2 L1-SINR test with CSI-RS based CMR and no dedicated IMR configured

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.7.6.1.4.1-2.

Table 7.7.6.1.4.1-2: Initial conditions for CSI-RS based L1-SINR absolute accuracy in FR2

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 7.7.6.1.4.3.
2. Cell 1 is the NR FR2 cell. Cell 1 is the target cell for the CSI-RS based L1-SINR measurements. The UE is configured to perform RLM and BFD measurement based on the CSI-RS.
3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.6.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.7.6.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 7.7.6.1.5-1.
3. After 640ms from the start of the test the SS transmits CSI-RS with a periodicity of 20 slots.
4. The SS shall check following requirements:

   - R1: the L1-SINR reported values of CSI-RS#0 and CSI-RS#1 in the periodic L1-RSRP reports. If the value for both CSI-RSs is within the limits in Table 7.7.6.1.5-2 or Table 7.7.6.1.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

   - R2: the L1-SINR value of CSI-RS#1 reported by the UE is compared to the expected L1-SINR value for CSI-RS#1. If the resulting value is outside the limits in Table 7.7.6.1.5-4 or the UE fails to report the measurement value for CSI-RS#1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   - R3: the DIFF SINR value of CSI-RS#0 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 7.7.6.1.5-4 or the UE fails to report the measurement value for CSI-RS#0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
6. Set the parameters according to each sub-test in Table 7.7.6.1.5-1 as appropriate and repeat steps 3-5.

7.7.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.6.1.4.3-1: Common Exception messages NR SA CSI-RS-based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and CSI-SINR Table H.3.6A-2 with conditions CSI-RS and PERIODIC Table H.3.6A-3 with condition PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.6.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSB.	
}			
}			

7.7.6.1.5 Test requirement

Table 7.7.6.1.5-1 defines the primary level settings excluding test tolerances for all tests. (Refer to Sec. 7.7.3.1.5)

Each L1-SINR measurement report for each of the tests in Table 7.7.6.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 7.7.6.1.5-2 for test configurations 1 and 2, and the corresponding absolute accuracy requirements in Table 7.7.6.1.5-3 for test configuration 3.

Table 7.7.6.1.5-1: FR2 CSI-RS based L1-SINR general test parameters

Parameter	Config	Unit	Test 1
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,C}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
SMTC configuration	1		SMTC.1
CSI-RS	1		CSI-RS.3.2 TDD
reportConfigType	1		periodic
reportQuantity	1		cri-SINR-r16
nrofReportedRS	1		2
L1-SINR reporting period	1		slot80
Propagation condition	1		AWGN

Antenna configuration	1		1x2
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table 7.7.6.1.5-2: FR2 CSI-RS based L1-SINR OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.9.1	
Assumption for UE beams Note 4			Rough	
N_{oc}	1~2	dBm/15 kHz	-104.1	
N_{oc}	1~2	dBm/SSB SCS	-95.1	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-1.8
CSI-RS-RSRP Note1	1~2	dBm/SCS	-85.07	-96.87
Io Note1	1~2	dBm/95.04MHz	-55.67	-63.88
$\hat{E}_s / N_{oc}$	1~2	dB	10	-1.8
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Void. Note 4: Information about types of UE beam is given in TS 38.133 Annex B.2.1.3, and does not limit UE implementation or test system implementation				

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall meet the corresponding absolute accuracy requirements in Table 7.7.6.1.5-3 and the corresponding relative accuracy requirements in Table 7.7.6.1.5-4.

Table 7.7.6.1.5-3: L1-SINR absolute accuracy requirements for the reported values R1

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest reported value (CSI-RS0)	53

Highest reported value (CSI-RS0)	76
Extreme Conditions	**Test 1 All bands**
Lowest reported value (CSI-RS0)	51
Highest reported value (CSI-RS0)	78

Table 7.7.6.1.5-4: L1-SINR relative accuracy requirements for the reported values R2 and R3

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest DIFF SINR reported value	6
Highest DIFF SINR reported value	15
Extreme Conditions	**Test 1 All bands**
Lowest DIFF SINR reported value	5
Highest DIFF SINR reported value	15

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.6.2 NR SA FR2 SSB based CMR and dedicated IMR L1-SINR measurement accuracy

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.7.6.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

7.7.6.2.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards. Applicability requires support of L1-SINR measurements.

7.7.6.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.6.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.6.2.

7.7.6.2.4 Test description

7.7.6.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.6.2.4.1-1.

Table 7.7.6.2.4.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with SSB based CMR and CSI-IM based IMR

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Configure the test equipment and the DUT according to the parameters in Table 7.7.6.2.4.1-2.

Table 7.7.6.2.4.1-2: Initial conditions for SSB based L1-SINR absolute accuracy in FR2

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the test configuration selected from Table 7.7.6.2.4.1-1.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 7.7.6.2.4.3.

2. Cell 1 is the NR FR2 cell. Cell 1 is the target cell for the SSB-based L1-RSRP measurements. The UE is configured one SSB resource set with two SSB resources and one CSI-IM resource set with two CSI-IM resource. UE is configured to perform RLM and BFD measurement based on the SSB resources 0 and 1. UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-IM resources as IMR..

3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.6.2.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.7.6.2.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.7.6.2.5-1.

3. After 640ms from the start of the test the SS transmits CSI-RS as IMR with a periodicity of 20 slots.

4. The SS shall check following requirements:

   - R1: the L1-SINR reported values of SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 in the periodic L1-RSRP reports. If the value for both SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 is within the limits in Table 7.7.6.2.5-2 and Table 7.7.6.2.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

   - R2: the L1-SINR value of SSB#1 reported by the UE is compared to the expected L1-SINR value for SSB#1. If the resulting value is outside the limits in Table 7.7.6.2.5-4 or the UE fails to report the

measurement value for SSB#1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

- R3: the DIFF SINR value of SSB#0 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 7.7.6.2.5-4 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 7.7.6.2.5-1 as appropriate and repeat steps 3-5.

7.7.6.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.6.2.4.3-1: Common Exception messages NR SA SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and SS-SINR and CSI-RS_IMR Table H.3.6A-2 with conditions SSB and PERIODIC Table H.3.6A-3 with condition PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.6.2.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

7.7.6.2.5 Test requirement

Table 7.7.6.2.5-1 defines the primary level settings including test tolerances for all tests.

Each L1-RSRP measurement report for each of the tests in Table 7.7.6.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 7.7.6.2.5-2 for test configurations 1 and 2, and the corresponding absolute accuracy requirements in Table 7.7.6.2.5-3 for test configuration 3.

Table 7.7.6.2.5-1: FR2 L1-SINR general test parameters with SSB based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
$BW_{channel}$	1~2	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD

RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
CSI-IM configuration	1~2		CSI-IM 3.1 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
SMTC configuration	1~2		SMTC.1
reportConfigType	1~2		periodic
reportQuantity-r16	1~2		ssb-Index-SINR-r16
Number of reported RS	1~2		2
L1-SINR reporting period	1~2		slot640
Propagation condition	1~2		AWGN
Antenna configuration	1~2		1x2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 7.7.6.2.5-2: FR2 L1-SINR SSB specific test parameters

Parameter	Config	Unit	Test 1	
			SSB0	SSB1
Angle of arrival configuration			Setup 1 according to A.9.1	
Assumption for UE beams Note 4			Rough	
N_{oc}	1~2	dBm/15kHz	-104.1	
N_{oc}	1	dBm/SSB SCS	-95.1	
	2		92.1	
$\hat{E}_s/I_{ot}$	1~2	dB	10	1.8
SS-RSRP Note1	1	dBm/SCS	-85.07	-96.87
	2		-82.06	-93.86
Io Note1	1~2	dBm/95.04 MHz	-55.67	
$\hat{E}_s/N_{oc}$	1~2	dB	10	-1.8

Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 2:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 3:	Information about types of UE beam is given in TS 38.133 Annex B.2.1.3, and does not limit UE implementation or test system implementation

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 of Cell 1 shall meet the corresponding absolute accuracy of SSB#0+CSI-IM#0 and absolute accuracy of SSB#1+CSI-IM#1 in Table 7.7.6.2.5-3. The corresponding relative accuracy requirements in Table 7.7.6.2.5-4

Table 7.7.6.2.5-3: L1-SINR absolute accuracy test requirement R1

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest reported value (CSI-RS0)	55
Highest reported value (CSI-RS0)	74
Extreme Conditions	**Test 1 All bands**
Lowest reported value (CSI-RS0)	53
Highest reported value (CSI-RS0)	76

Table 7.7.6.2.5-4: L1-SINR relative accuracy requirements for the reported values R2 and R3

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest DIFF SINR reported value	7
Highest DIFF SINR reported value	15
Extreme Conditions	**Test 1 All bands**
Lowest DIFF SINR reported value	6
Highest DIFF SINR reported value	15

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.6.3 NR SA FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

7.7.6.3.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

7.7.6.3.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards. Applicability requires support of L1-SINR measurements.

7.7.6.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.6.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.6.3.

7.7.6.3.4 Test description

7.7.6.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.6.3.4.1-1.

Table 7.7.6.3.4.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with CSI-RS based both CMR based IMR

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.7.6.3.4.1-2.

Table 7.7.6.3.4.1-2: Initial conditions for CSI-RS based L1-SINR absolute accuracy in FR2

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the test configuration selected from Table 7.7.6.3.4.1-1.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 7.7.6.3.4.3.
2. Cell 1 is the NR FR2 cell. Cell 1 is the target cell for the SSB-based L1-RSRP measurements. The UE is configured two CSI-RS resource sets with two CSI-RS resources for each set. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as both CMR and IMR.
3. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.6.3.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in the above table 7.7.6.3.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 7.7.6.3.5-1.

3. After 640ms from the start of the test the SS transmits CSI-RS as IMR with a periodicity of 20 slots.

4. The SS shall check following requirements:

   - R1: the L1-SINR reported values of CSI-RS#0+CSI-IM#0 and CSI-RS#1+CSI-IM#1 in the periodic L1-RSRP reports. If the value for both CSI-RS#0+CSI-IM#0 and CSI-RS#1+CSI-IM#1 is within the limits in Table 7.7.6.3.5-2 and Table 7.7.6.3.5-3 (depending on the test configuration), the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

   - R2: the L1-SINR value of CSI-RS#1 reported by the UE is compared to the expected L1-SINR value for CSI-RS #1. If the resulting value is outside the limits in Table 7.7.6.3.5-4 or the UE fails to report the measurement value for CSI-RS #1, the number of failed iterations for R2 is increased by one. Otherwise, the number of passed iterations for R2 is increased by one.

   -R3: The DIFF SINR value of CSI-RS #0 reported by the UE is compared to the expected DIFF SINR value. If the resulting value is outside the limits in Table 7.7.6.3.5-4 or the UE fails to report the measurement value for CSI-RS #0, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

5. The SS shall continue checking the L1-SINR report messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

6. Set the parameters according to each sub-test in Table 7.7.6.3.5-1 as appropriate and repeat steps 3-5.

7.7.6.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.6.3.4.3-1: Common Exception messages NR SA CSI-RS-based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6A-1 with conditions PERIODIC and CSI-SINR Table H.3.6A-2 with conditions CSI-RS and PERIODIC Table H.3.6A-3 with condition PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.6.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSB.	
}			
}			

7.7.6.3.5 Test requirement

Table 7.7.6.3.5-1 defines the primary level settings excluding test tolerances for all tests.

Each L1-SINR measurement report for each of the tests in Table 7.7.6.3.5-1 shall meet the corresponding absolute accuracy requirements in Table 7.7.6.3.5-2 for test configurations 1 and 2, and the corresponding absolute accuracy requirements in Table 7.7.6.3.5-3 for test configuration 3.

Table 7.7.6.3.5-1: FR2 L1-SINR measurement test with CSI-RS based both CMR and IMR

Parameter	Config	Unit	Test 1
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
SMTC configuration	1		SMTC.1
CSI-RS configuration as CMR	1		CSI-RS.3.2 TDD
CSI-RS configuration as IMR	1		CSI-RS.3.3A TDD
reportConfigType	1		periodic
reportQuantity-r16	1		cri-SINR-r16
nrofReportedRS	1		2
L1-RSRP reporting period	1		slot80
Propagation condition	1		AWGN
Antenna configuration	1		1x2
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 7.7.6.3.5-2: FR2 CSI-RS based L1-SINR measurement OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.9.1	
Assumption for UE beams Note 4			Rough	
N_{oc}	1~2	dBm/15 kHz	-104.1	
N_{oc}	1~2	dBm/SS B SCS	-95.1	

$\hat{E}_s/I_{ot}$	1~2	dB	10	0.2
CSI-RS-RSRP[Note1]	1~2	dBm/SCS	-85.07	-94.87
Io[Note1]	1~2	dBm/95.04MHz	-55.67	-62.97
$\hat{E}_s/N_{oc}$	1~2	dB	10	0.2
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in TS 38.133 Annex B.2.1.3, and does not limit UE implementation or test system implementation				

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for CSI-RS#0+CSI-RS#2 and CSI-RS#1+CSI-RS#3 of Cell 1 shall meet the corresponding absolute accuracy of CSI-RS#0 and absolute accuracy of CSI-RS#1 in Table 7.7.6.3.5-3. The corresponding relative accuracy of CSI-RS#0 compared with CSI-RS#1 in Table 7.7.6.3.5-4.

Table 7.7.6.3.5-3: L1-SINR absolute accuracy test requirement R1

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest reported value (CSI-RS0)	55
Highest reported value (CSI-RS0)	74
Extreme Conditions	**Test 1 All bands**
Lowest reported value (CSI-RS0)	53
Highest reported value (CSI-RS0)	76

Table 7.7.6.3.5-4: L1-SINR relative accuracy test requirement for the reported values R2 and R3

UE power class 3	
Normal Conditions	**Test 1 All bands**
Lowest DIFF SINR reported value	5
Highest DIFF SINR reported value	13
Extreme Conditions	**Test 1 All bands**
Lowest DIFF SINR reported value	4
Highest DIFF SINR reported value	14

For the test to pass, the ratio of successful reported values for each requirement (R1 to R3) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.7 CSI-RSRP

7.7.7.0 Minimum conformance requirements

Same as in clause 5.7.7.0.

7.7.7.1 Intra-frequency measurements

7.7.7.1.1 NR SA FR2 CSI-RSRP measurement accuracy

Editor's Note: This test case is incomplete. The following still is missing:

- Message content is missing

- Test procedure is missing

- Cell mapping is missing

- Applicability is missing

- TT is missing

7.7.7.1.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency CSI-RS based RSRP measurement accuracy for NR FR2 is within the specified limits for all bands. This test will partly verify the requirements in clauses 10.1.3.2.1 & 10.1.3.2.2 in TS 38.133 [6].

7.7.7.1.1.2 Test applicability

This test applies to all types of NR UE release 16 forward supporting CSI-RS based RSRP and RSRQ measurement.

7.7.7.1.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.7.7.0.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.7.1

7.7.7.1.1.4 Test description

7.7.7.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.7.1.1.4.1-1.

Table 7.7.7.1.1.4.1-1: NR SA FR1 CSI-RSRP measurement accuracy supported test configurations

Configuration	Description
7.7.7.1.1-1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.7.7.1.1.1.1.4.1-2.

Table 7.7.7.1.1.4-3: Test Environment parameters

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table TBD		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.7.7.1.1.4.3.
2. There are two cells on the same frequency. Cell 1 is the PCell, and Cell 2 is the target cell for CSI-RSRP measurements.

7.7.7.1.1.4.2 Test procedure

TBD

7.7.7.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.7.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	TBD

7.7.7.1.1.5 Test requirement

Tables 7.7.7.1.1.5-1 and 7.7.7.1.1.5-2 define the NR cell specific test parameters, not including test tolerances yet.

Table 7.7.7.1.1.5-1: Cell specific test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 24		100: $N_{RB,c}$ = 24	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SMTC configuration		SMTC.1		SMTC.1	
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			

Time offset with Cell 1	µs	-	0.58	-	0.58
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table 7.7.7.1.1.5-2: CSI-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams Note 7		Rough		Assumption for UE beams Note 7	
N_{oc} Note1	dBm/15kHz Note4	-91.6		N/A	
N_{oc} Note1	dBm/SCS Note4	-82.6		N/A	
$\hat{E}_s / N_{oc}$	dB	6.0	1.0	N/A	N/A
E_s	dBm/SCS Note4			(Table B.2.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2.2-2 Rx Beam Peak +2.1dB)
CSI-RS_RP Note2	dBm/SCS	-76.6	-81.6	(Table B.2.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2.2-2 Rx Beam Peak +2.1dB)
$\hat{E}_s / I_{ot}$ BB Note6	dB	2.44	-5.98	-5.98	-5.98
Io Note2	dBm/95.04 MHz Note4	-50.05		(Table B.2.2.2-2 Rx Beam Peak +29.70dB)	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: CSI-RS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void					

Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 7.7.7.1.1.5-3: SS-RSRP Intra frequency accuracy requirements for the reported values for test configurations 1 and 2

TBD

The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90% with the confidence level of 95%,

7.7.7.2 Inter-frequency measurements

7.7.7.2.1 NR SA FR2-FR2 CSI-RSRP measurement accuracy

Editor's Note: This test case is incomplete. The following still is missing:

- Message content is missing
- Test procedure is missing
- Cell mapping is missing
- Applicability is missing
- TT is missing

7.7.7.2.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency CSI-RS based RSRP measurement accuracy for NR FR2 is within the specified limits for all bands. This test will partly verify the requirements in clauses 10.1.5.2.1 and 10.1.5.2.2 in TS 38.133 [6].

7.7.7.2.1.2 Test applicability

This test applies to all types of NR UE release 16 forward supporting CSI-RS based RSRP and RSRQ measurement.

7.7.7.2.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 7.7.7.0

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.7.2.

7.7.7.2.1.4 Test description

In this test, there TBD.

7.7.7.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.7.2.1.4.1-1.

Table 7.7.7.2.1.4.1-1: NR SA FR1 CSI-RSRP measurement accuracy supported test configurations

Configuration	Description
7.7.7.2.1-1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.7.7.2.1.1.1.4.1-2.

Table 7.7.7.2.1.4-3: Test Environment parameters

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table TBD		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram			

1. Message contents are defined in clause 7.7.7.2.1.4.3.
2. There are two cells on the different frequencies. Cell 1 is the PCell, and Cell 2 is the target cell for CSI-RSRP measurements.

7.7.7.2.1.4.2 Test procedure

TBD

7.7.7.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 7.7.7.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	TBD

7.7.7.2.1.5 Test requirement

Table 7.7.7.2.1.5-1 defines the NR cell specific test parameters, not including test tolerances yet.

Table 7.7.7.2.1.5-1: Cell specific test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
$BW_{channel}$			100: $N_{RB,c}$ = 24		100: $N_{RB,c}$ = 24	
Gap pattern ID			0		0	
Duplex mode			TDD	TDD	TDD	TDD
TDD configuration			TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel			SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel			CCR.3.1 TDD	-	CCR.3.1 TDD	-
SSB configuration			SSB.3 FR2		SSB.3 FR2	
SMTC configuration			SMTC.1		SMTC.1	
OCNG Patterns			OP.3		OP.3	
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration			DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration			TRS.2.1 TDD		TRS.2.1 TDD	

PDCCH/PDSCH TCI Configuration			TCI.State.2		TCI.State.2	
CSI-RS configuration for RRM			CSI-RS.RRM.FR2.1 TDD		CSI-RS.RRM.FR2.1 TDD	
Time offset between Cell 2 and Cell 3		µs	0.58		0.58	
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation condition		-	AWGN	AWGN	AWGN	AWGN
Antenna configuration		-	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

Table 7.7.7.2.1.5-2: CSI-RSRP Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
		AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
N_{oc} Note1	dBm/15kHz Note4	-90.6	-90.6	(Table B.2.3.2-2 Rx Beam Peak +1.97dB)	(Table B.2.3.2-2 Rx Beam Peak - 3.03dB)
Assumption for UE beams Note 7		Rough		Rough	
N_{oc} Note1	dBm/SCS Note4	-81.6	-81.6	(Table B.2.3.2-2 Rx Beam Peak +11.0dB)	(Table B.2.3.2-2 Rx Beam Peak +6.0dB)
$\hat{E}_s / N_{oc}$	dB	6.0	6.0	17.0	-1.0
CSI-RS_RP Note2	dBm/SCS	-75.60	-75.60	(Table B.2.3.2-2 Rx Beam Peak +28.0dB)	(Table B.2.3.2-2 Rx Beam Peak +5.0dB)
(CSI-RS_RP$_{Cell\ 1}$ – CSI-RS_RP$_{Cell\ 2}$)	dB	0		23.00	
$\hat{E}_s / I_{ot\ BB}$ Note6	dB	5.29	5.96	8.86	-3.92
Io Note2	dBm/95.04 MHz Note4	-50.03	-50.03	(Table B.2.3.2-2 Rx Beam	(Table B.2.3.2-2 Rx Beam

				Peak +52.68dB)	Peak +33.13dB)
($Io_{freq\ 1}$ – $Io_{freq\ 2}$)	dB	0		19.55	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-RS_RP, Es/Iot, Io, (CSI-RS_$RP_{Cell\ 2}$ – CSI-RS_$RP_{Cell\ 1}$) and ($Io_{freq\ 2}$ – $Io_{freq\ 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Void
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: Void
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P or ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 7.7.7.2.1.5-3: SS-RSRP Intra frequency accuracy requirements for the reported values for test configurations 1 and 2

TBD

The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90% with the confidence level of 95%,

7.7.8 CSI-RSRQ

7.7.8.0 Minimum conformance requirements

7.7.8.0.1 Intra-frequency CSI-RSRQ accuracy requirements

[TS 38.133, Clause 10.1.8.2 and Clause 10.1.11]

7.7.8.0.1.1 Absolute CSI-RSRQ accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the intra-frequency measurement defined in Clause 9.10.2.1 in TS 38.133 [6] in FR2.

The accuracy requirements in Table 7.7.8.0.1.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 in TS 38.133 [6] for a corresponding Band for each relevant SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.12 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 7.7.8.0.1.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in Clause 7.3.4 of TS 38.101-2 [3].

Table 7.7.8.0.1.1-1: CSI-RSRQ Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io [Note 2] range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} [Note 1]		$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±2.5	±4	≥-3	Same value as CSI_RP in Table B.2.8-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-6			

Note 1: Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

The reporting range of CSI-RSRQ measurement is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 7.7.8.0.1.1-2. The range in the signaling may be larger than the guaranteed accuracy range.

Table 7.7.8.0.1.1-2: CSI-RSRQ measurement report mapping

Reported value	Measured quantity value	Unit
CSI-RSRQ_0	CSI-RSRQ<-43	dB
CSI-RSRQ_1	-43≤ CSI-RSRQ<-42.5	dB
CSI-RSRQ_2	-42.5≤ CSI-RSRQ<-42	dB
CSI-RSRQ_3	-42≤ CSI-RSRQ<-41.5	dB
CSI-RSRQ_4	-41.5≤ CSI-RSRQ<-41	dB
..	..	…
CSI-RSRQ_122	17.5≤ CSI-RSRQ<18	dB
CSI-RSRQ_123	18≤ CSI-RSRQ<18.5	dB
CSI-RSRQ_124	18.5≤ CSI-RSRQ<19	dB
CSI-RSRQ_125	19≤ CSI-RSRQ<19.5	dB
CSI-RSRQ_126	19.5≤ CSI-RSRQ<20	dB
CSI-RSRQ_127	20 ≤ CSI-RSRQ	dB

7.7.8.0.2 Inter-frequency CSI-RSRQ accuracy requirements

[TS 38.133, Clause 10.1.10.2 and Clause 10.1.11]

7.7.8.0.2.1 Absolute CSI-RSRQ accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply the inter-frequency measurement defined in Clause 9.10.3.1 in TS 38.133 [6] in FR2.

The accuracy requirements in Table 7.7.8.0.2.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 in TS 38.133 [6] for a corresponding Band for associated SSB.

- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 7.7.8.0.2.1-1.

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 7.7.8.0.2.1-1: CSI-RSRQ Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±2.5	±4	≥-3	Same value as CSI_RP in Table B.2.9-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-4			

Note 1: Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

The reporting range of CSI-RSRQ measurement is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 7.7.8.0.2.1-2. The range in the signaling may be larger than the guaranteed accuracy range.

Table 7.7.8.0.2.1-2: CSI-RSRQ measurement report mapping

Reported value	Measured quantity value	Unit
CSI-RSRQ_0	CSI-RSRQ<-43	dB
CSI-RSRQ_1	-43≤ CSI-RSRQ<-42.5	dB
CSI-RSRQ_2	-42.5≤ CSI-RSRQ<-42	dB
CSI-RSRQ_3	-42≤ CSI-RSRQ<-41.5	dB
CSI-RSRQ_4	-41.5≤ CSI-RSRQ<-41	dB
..	..	…
CSI-RSRQ_122	17.5≤ CSI-RSRQ<18	dB
CSI-RSRQ_123	18≤ CSI-RSRQ<18.5	dB
CSI-RSRQ_124	18.5≤ CSI-RSRQ<19	dB
CSI-RSRQ_125	19≤ CSI-RSRQ<19.5	dB
CSI-RSRQ_126	19.5≤ CSI-RSRQ<20	dB
CSI-RSRQ_127	20 ≤ CSI-RSRQ	dB

7.7.8.0.2.2 Relative CSI-RSRQ accuracy

The relative accuracy of CSI-RSRQ is defined as the CSI-RSRQ measured from one cell compared to the CSI-RSRQ measured from another cell with the same center frequency, or between any two CSI-RSRQ levels measured on the same cell in FR2.

The accuracy requirements in Table 7.7.8.0.2.2-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 in TS 38.133 [6] for a corresponding Band for the associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 7.7.8.0.2.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 7.7.8.0.2.2-1: CSI-RSRQ Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±3	±4	≥-3	Same value as CSI_RP in Table B.2.9-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival		-50
±4	±4	≥-4			

Note 1: Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of cells to which the requirement applies.
Note 4: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

7.7.8.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

7.7.8.1.1 Test purpose

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.8.2.1 in TS 38.133 [6].

7.7.8.1.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR SA and CSI-RS based RSRP and RSRQ measurements.

7.7.8.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 7.7.8.0.1.

The normative reference for this requirement is in TS 38.133 [6] A.7.7.8.1.

7.7.8.1.4 Test description

7.7.8.1.4.1 Initial conditions

Supported test configurations are shown in Table 7.7.8.1.4.1-1.

Table 7.7.8.1.4.1-1: CSI-RSRQ Intra frequency CSI-RSRQ supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.7.8.1.4.1-2.

Table 7.7.8.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] Clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 7.7.8.1.5-1.
2. Message contents are defined in Clause 7.7.8.1.4.3.
3. There are two intra-frequency cells specified in the test, where Cell 1 is the NR FR2 serving cell and Cell 2 is the neighbour cell on the same NR FR2 carrier and the target cell for the CSI-RSRQ measurements.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.8.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 7.7.8.1.5-1 and 7.7.8.1.5-2 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the CSI-RSRQ reported values in the periodic MeasurementReport. The CSI-RSRQ value of Cell 2 reported by the UE is compared to the expected CSI-RSRQ. If the value is outside the limits (determined Table 7.7.8.0.1.1-1 and Table 7.7.8.0.1.1-2) or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 7.7.8.1.5-1 and 7.7.8.1.5-2 as appropriate and repeat steps 5-7.

7.7.8.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 7.7.8.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition CSI-RS MOBILITY and RSRQ

Table 7.7.8.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
maxReportCells	2		
}			
}			
}			

7.7.8.1.5 Test Requirements

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ+2.5 dB to Nominal CSI-RSRQ-3.5 dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ+3.5 dB to Nominal CSI-RSRQ-4.5 dB according to the requirements in Clause 7.7.8.0.1.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal RSRQ is the value shown in Table 7.7.8.1.5-2.

Table 7.7.8.1.5-1: CSI-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	

TCI state		TCI.State .0		TCI.Sta te.0	
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	
Control channel RMC		CCR.3.1 TDD	-	CCR.3. 1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
Time offset with Cell 1	µs	-	0.58	-	0.58
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
EPRE ratio of CSI-RS to SSS	dB	0	0	0	0
EPRE ratio of PSS to SSS					
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Propagation condition		AWGN		AWGN	
Antenna configuration		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 7.7.8.1.5-2: CSI-RSRQ Intra frequency OTA related test parameters

	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to Clause A.3.15.1 in TS 38.133 [6]		Setup 1according to Clause A.3.15.1 in TS 38.133 [6]	
Assumption for UE beams Note 9		Rough			
N_{OC} Note1	dBm/15kHz Note 4	-100.7		-96.7	
N_{OC} Note1	dBm/SCS Note3	-91.7		-87.7	
CSI-RSRP Note2	dBm/SCS Note4	-88.67	-88.67	-90.67	-90.67
CSI-RSRQ Note2	dB	-14.81	-14.81	-16.84	-16.84
$\hat{E}_s / N_{oc}$ for SSB	dB	3	3	-3	-3
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	3	3	-3	-3
$\hat{E}_s / I_{ot}$ for SSB	dB	-1.83	-1.83	-4.81	-4.81
$\hat{E}_s / I_{ot}$ for CSI-RS	dB	-1.83	-1.83	-4.81	-4.81
Io Note2	dBm/95.04 MHz Note4	-55.7		-55.67	-55.67

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.

Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.

Note 6: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6]. Note 7: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6] and does not limit UE implementation or test system implementation.

Table 7.7.8.1.5-3: CSI-RSRQ Intra frequency absolute accuracy requirements for the reported values

UE Power Class 3	Test 1		Test 2	
Normal Conditions				
Lowest reported value (Cell 2)	n257, n258, n261	CSI-RSRQ_52	n257, n258, n261	CSI-RSRQ_46
	n260	CSI-RSRQ_51	n260	CSI-RSRQ_46
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	All bands	CSI-RSRQ_62	All bands	CSI-RSRQ_60

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

7.7.8.2 SA inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

7.7.8.2.1 Test purpose

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.10.2.1 and 10.1.10.2.2 in TS 38.133 [6] for inter-frequency measurement.

7.7.8.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR SA and CSI-RS based RSRP and RSRQ measurements.

7.7.8.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 7.7.8.0.2.

The normative reference for this requirement is in TS 38.133 [6] A.7.7.8.2.

7.7.8.2.4 Test description

7.7.8.2.4.1 Initial conditions

Supported test configurations are shown in Table 7.7.8.2.4.1-1.

Table 7.7.8.2.4.1-1: CSI-RSRQ Inter frequency supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.7.8.2.4.1-2.

Table 7.7.8.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] Clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the selected test configuration.	

Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 7.7.8.2.5-1.
2. Message contents are defined in Clause 7.7.8.2.4.3.
3. There are two inter-frequency cells specified in the test, where Cell 1 is the serving cell on an NR FR2 carrier and Cell 2 is the neighbour cell on a different NR FR2 carrier and the target cell for the CSI-RSRQ measurements.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.8.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 7.7.8.2.5-1 and 7.7.8.2.5-2 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the CSI-RSRQ reported values in the periodic MeasurementReport. The CSI-RSRQ value of Cell 2 reported by the UE is compared to the expected CSI-RSRQ. If the value is outside the limits (determined by Table 7.7.8.0.2.1-1 and Table 7.7.8.0.2.1-2) or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 7.7.8.2.5-1 and 7.7.8.2.5-2 as appropriate and repeat steps 5-7.

7.7.8.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 7.7.8.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-6 with condition gapUE and Pattern #0 Table H.3.1-7 with condition INTER-FREQ, CSI-RS MOBILITY and RSRQ

Table 7.7.8.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		
maxReportCells	2		
}			
}			
}			

7.7.8.2.5 Test Requirements

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ+2.5dB to Nominal CSI-RSRQ -3.5dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ +3.5dB to Nominal CSI-RSRQ -4.5dB according to the requirements in Clause 7.7.8.0.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test.

The CSI-RSRQ relative measurement accuracy shall fulfil the requirements in Clause 7.7.8.0.2.2.

Table 7.7.8.2.5-1: CSI-RSRQ Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		Freq1	freq2	freq1	Freq2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
Time offset with Cell 1	µs	-	0.58	-	0.58
SMTC configuration		SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS[Note 1]					
EPRE ratio of CSI-RS to SSS					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 7.7.8.2.5-2: CSI-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		Setup 1 in Clause A.3.15 in TS 38.133 [6].		Setup 1 in Clause A.3.15 in TS 38.133 [6].	
Assumption for UE beams[Note 8]		Rough		Rough	

N_{oc} Note1	dBm/15kHz Note4	-95.93		-95.44	
N_{oc} Note1	dBm/SCS Note3	-86.90		-86.41	
CSI-RSRP Note2	dBm/SCS Note4	-88.65	-88.65	-89.41	-89.41
CSI-RSRQ Note2	dB	-14.80	-14.80	-15.59	-15.59
$\hat{E}_s/N_{oc}$ for SSB	dB	-1.75	-1.75	-3	-3
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	-1.75	-1.75	-3	-3
$\hat{E}_s/I_{ot}$ for SSB	dB	-1.81	-1.81	-3.06	-3.06
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	-1.81	-1.81	-3.06	-3.06
Io Note2	dBm/95.04 MHz Note4	-55.69	-55.69	-55.66	-55.66

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6] and does not limit UE implementation or test system implementation.

Table 7.7.8.2.5-3: Evaluation limits for the reported values for T1 and T2 absolute accuracy

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	RSRQ 52	n257, n258, n261	RSRQ_48
		n260	RSRQ_48
Highest reported value (Cell 1)	RSRQ 62	n257, n258, n261	RSRQ_63
		n260	RSRQ_62
Lowest reported value (Cell 2)	RSRQ 52	n257, n258, n261	RSRQ_48
		n260	RSRQ_48
Highest reported value (Cell 2)	RSRQ 62	n257, n258, n261	RSRQ_63
		n260	RSRQ_62

Table 7.7.8.2.5-4: Evaluation limits for the reported values for T1 and T2 relative accuracy

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest value (RSRQ report Cell 2 – RSRQ report Cell 1)	- 7	- 9
Highest value (RSRQ report Cell 2 – RSRQ report Cell 1)	+ 7	+ 9

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

7.7.9 CSI-SINR

7.7.9.0 Minimum conformance requirements

7.7.9.0.1 Intra-frequency CSI-SINR accuracy requirements

[TS 38.133, Clause 10.1.13.2 and Clause 10.1.16]

7.7.9.0.1.1 Absolute CSI-SINR accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 7.7.9.0.1.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.12 in TS 38.133 [6] for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in Clause 7.3.4 of TS 38.101-2 [3].
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for intra-frequency measurement is serving cell timing.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 7.7.9.0.1.1-1.

Table 7.7.9.0.1.1-1: CSI-SINR Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±3	±4	≥-3	Same value as CSI_RP in Table B.2.8-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-6			

Note 1: Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

The reporting range of CSI-SINR for reporting is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 7.7.9.0.1.1-2. The range in the signaling may be larger than the guaranteed accuracy range.

Table 7.7.9.0.1.1-2: CSI-SINR measurement report mapping

Reported value	Measured quantity value	Unit
CSI-SINR_0	CSI-SINR <-23	dB
CSI-SINR_1	-23≤ CSI-SINR <-22.5	dB
CSI-SINR_2	-22.5≤ CSI-SINR <-22	dB
CSI-SINR_3	-22≤ CSI-SINR <-21.5	dB
CSI-SINR_4	-21.5≤ CSI-SINR <-21	dB
..	..	…

CSI-SINR_123	38≤ CSI-SINR <38.5	dB
CSI-SINR_124	38.5≤ CSI-SINR <39	dB
CSI-SINR_125	39≤ CSI-SINR <39.5	dB
CSI-SINR_126	39.5≤ CSI-SINR <40	dB
CSI-SINR_127	40≤ CSI-SINR	dB

7.7.9.0.2 Inter-frequency CSI-SINR accuracy requirements

[TS 38.133, Clause 10.1.15.2 and Clause 10.1.16]

7.7.9.0.2.1 Absolute CSI-SINR accuracy

The requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 7.7.9.0.2.1-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in Clause 7.3.4 of TS 38.101-2 [3].
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 7.7.9.0.2.1-1.

Table 7.7.9.0.2.1-1: CSI-SINR Inter frequency absolute accuracy in FR2

Accuracy		**Conditions**		
Normal condition	**Extreme condition**	**CSI-RS Ês/Iot**	**Io [Note 2] range**	
			Minimum Io	**Maximum Io**
dB	**dB**	**dB**	**dBm / SCS_{CSI-RS} [Note 1]**	**dBm/$BW_{Channel}$**
			SCS_{CSI-RS} = 60kHz / **SCS_{CSI-RS} = 120kHz**	
±3	±4	≥-3	Same value as CSI_RP in Table B.2.9-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival	-50
3.5	±4	≥-4		

Note 1: Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2: Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4: The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

The reporting range of CSI-SINR for reporting is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 7.7.9.0.2.1-2. The range in the signaling may be larger than the guaranteed accuracy range.

Table 7.7.9.0.2.1-2: CSI-SINR measurement report mapping

Reported value	Measured quantity value	Unit
CSI-SINR_0	CSI-SINR <-23	dB
CSI-SINR_1	-23≤ CSI-SINR <-22.5	dB
CSI-SINR_2	-22.5≤ CSI-SINR <-22	dB
CSI-SINR_3	-22≤ CSI-SINR <-21.5	dB
CSI-SINR_4	-21.5≤ CSI-SINR <-21	dB
..	..	…
CSI-SINR_123	38≤ CSI-SINR <38.5	dB
CSI-SINR_124	38.5≤ CSI-SINR <39	dB
CSI-SINR_125	39≤ CSI-SINR <39.5	dB
CSI-SINR_126	39.5≤ CSI-SINR <40	dB
CSI-SINR_127	40≤ CSI-SINR	dB

7.7.9.0.2.2 Relative CSI-SINR accuracy

The relative accuracy of CSI-SINR in inter frequency case is defined as the CSI-SINR measured from one cell on a frequency in FR2 compared to the CSI-SINR measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 7.7.9.0.2.2-1 are valid under the following conditions:

- Conditions defined in Clause 7.3 of TS 38.101-2 [3] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.13 in TS 38.133 [6] for a corresponding Band.
- $|CSI_RP1_{dBm} - CSI_RP2_{dBm}| \leq 27$ dB
- | Channel 1_Io -Channel 2_Io | ≤ 20 dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in Clause 7.3.4 of TS 38.101-2 [3].
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
  - Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
  - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 7.7.9.0.2.2-1.

Table 7.7.9.0.2.2-1: CSI-SINR Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io Note 2 range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS_{CSI-RS} Note 1		$dBm/BW_{Channel}$
			SCS_{CSI-RS} = 60kHz	SCS_{CSI-RS} = 120kHz	
±3.5	±4	≥-3	Same value as CSI_RP in Table B.2.9-2 in TS 38.133 [6], according to UE Power class, operating band and angle of arrival		-50
±4	±4	≥-6			

Note 1:	Values based on Refsens and EIS spherical coverage as defined in Clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
Note 2:	Io specified at the reference point and assumed to have constant EPRE across the bandwidth.
Note 3:	In the test cases, the CSI-RS Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.
Note 4:	The requirements apply for CSI-RS Ês/Iot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.

7.7.9.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

7.7.9.1.1 Test purpose

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.13.2.1 in TS 38.133 [6].

7.7.9.1.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR SA, which supports CSI-RS based SINR measurements.

7.7.9.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 7.7.9.0.1.

The normative reference for this requirement is in TS 38.133 [6] A.7.7.9.1.

7.7.9.1.4 Test description

7.7.9.1.4.1 Initial conditions

Supported test configurations are shown in Table 7.7.9.1.4.1-1.

Table 7.7.9.1.4.1-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.7.8.1.4.1-2.

Table 7.7.9.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] Clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.

Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 7.7.9.1.5-1.
2. Message contents are defined in Clause 7.7.9.1.4.3.
3. There are two intra-frequency cells specified in the test, where Cell 1 is the NR FR2 serving cell and Cell 2 is the neighbour cell on the same NR FR2 carrier and the target cell for the CSI-SINR measurements. The TCI status for Cell 1 is defined in Table A.3.16.2-1 in TS 38.133 [6] and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1 in TS 38.133 [6].
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.9.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 7.7.9.1.5-1 and 7.7.9.1.5-2 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the CSI-SINR reported values in the periodic MeasurementReport. The CSI-SINR value of Cell 2 reported by the UE is compared to the expected CSI-SINR. If the value is outside the limits (determined by Table 7.7.9.0.1.1-1 and Table 7.7.9.0.1.1-2) or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 7.7.9.1.5-1 and 7.7.9.1.5-2 as appropriate and repeat steps 5-7.

7.7.9.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 7.7.9.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-7 with condition CSI-RS MOBILITY and SINR

Table 7.7.9.1.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
rsType	csirs		

reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

7.7.9.1.5 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR+XdB to Nominal CSI-SINR –X-1dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR +YdB to Nominal CSI-SINR –Y-1dB according to the requirements in Clause 7.7.9.0.1.1 with an additional -1dB margin reflecting the possible impact of UE self-noise in the test. The relative CSI-SINR measurement accuracy shall fulfil the requirements in Clause 7.7.9.0.1.1.

Editor's note: The values of X and Y are pending on the accuracy requirement discussion.

Table 7.7.9.1.5-1: CSI-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	
Dedicated RMSI CORESET Reference Channel		CCR.3 .1 TDD	-	CCR.3. 1 TDD	-
Time offset with Cell 1	µs	-	0.29	-	0.29
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of CSI-RS to SSS					
EPRE ratio of OCNG to SSS[Note 1]					
Propagation conditions		AWGN			
Antenna configuration		1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 7.7.9.1.5-2: CSI-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to Clause A.3.15.1 in TS 38.133 [6]		Setup 1 according to Clause A.3.15.1 in TS 38.133 [6]	
Assumption for UE beams Note 9		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105		-105	
N_{oc} Note1	dBm/SCS Note3	-96		-96	
CSI-RSRP Note2	dBm/SCS Note4	-91.43	-93.31	-98.77	-98.77
CSI-SINR Note2	dB	-0.18	-3.32	-4.95	-4.95
$\hat{E}_s / N_{oc}$ for SSB	dB	4.54	2.66	-2.8	-2.8
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	4.54	2.66	-2.8	-2.8
$\hat{E}_s / I_{ot}$ for SSB	dB	-0.18	-3.32	-4.95	-4.95
$\hat{E}_s / I_{ot}$ for CSI-RS	dB	-0.18	-3.32	-4.95	-4.95
Io Note2	dBm/95.04 MHz Note4	-59.43		-63.87	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.
Note 6: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6].
Note 7: Void
Note 8: Void
Note 9: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6] and does not limit UE implementation or test system implementation.

Table 7.7.9.1.5-3: CSI-SINR Intra frequency absolute accuracy requirements for the reported values

UE Power Class 3	Test 1		Test 2	
Normal Conditions				
Lowest reported value (Cell 2)	n257, n258, n261	CSI-SINR_32	n257, n258, n261	CSI-SINR_29
	n260	CSI-SINR_32	n260	CSI-SINR_28
	n259	FFS	n259	FFS
Highest reported value (Cell 2)	All bands	CSI-SINR_48	All bands	CSI-SINR_45

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

7.7.9.2 SA inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

7.7.9.2.1 Test purpose

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.15.2.1 and 10.1.15.2.2 in TS 38.133 [6] for inter-frequency measurement.

7.7.9.2.2 Test applicability

This test applies to all types of NR UE Rel-16 and forward supporting NR SA, which supports CSI-RS based SINR measurements.

7.7.9.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in Clause 7.7.9.0.2.

The normative reference for this requirement is in TS 38.133 [6] A.7.7.9.2.

7.7.9.2.4 Test description

7.7.9.2.4.1 Initial conditions

Supported test configurations are shown in Table 7.7.9.2.4.1-1.

Table 7.7.9.2.4.1-1: CSI-SINR Inter frequency CSI-SINR supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 7.7.9.2.4.1-2.

Table 7.7.9.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] Clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 7.7.9.2.5-1.
2. Message contents are defined in Clause 7.7.9.2.4.3.
3. There are two inter-frequency cells specified in the test, where Cell 1 is the serving cell on an NR FR2 carrier and Cell 2 is the neighbour cell on a different NR FR2 carrier and the target cell for the CSI-SINR measurements. The TCI status for Cell 1 is defined in Table A.3.16.2-1 in TS 38.133 [6] and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1 in TS 38.133 [6].

4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I.

7.7.9.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] Clause 4.5.
2. Set the parameters according to Table 7.7.9.2.5-1 and 7.7.9.2.5-2 as appropriate.
3. The SS shall transmit an RRCReconfiguration message on Cell 1.
4. The UE shall transmit an RRCReconfigurationComplete message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the CSI-SINR reported values in the periodic MeasurementReport. The CSI-SINR value of Cell 2 reported by the UE is compared to the expected CSI-SINR. If the value is outside the limits (determined by Table 7.7.9.0.2.1-1 and Table 7.7.9.0.2.1-2) or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 7.7.9.2.5-1 and 7.7.9.2.5-2 as appropriate and repeat steps 5-7.

7.7.9.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] Clause 7.3 with the following exceptions.

Table 7.7.9.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with condition CSI-RS MOBILITY Table H.3.1-5 Table H.3.1-6 with condition gapUE and Pattern #0 Table H.3.1-7 with condition INTER-FREQ, CSI-RS MOBILITY and SINR

Table 7.7.9.2.4.3-2: ReportConfigNR-DEFAULT(Periodical)

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
reportQuantityCell SEQUENCE {			
rsType	csirs		
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

7.7.9.2.5 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR +XdB to Nominal CSI-SINR –X-1dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR +YdB to Nominal CSI-SINR –Y-1dB according to the requirements in 7.7.9.0.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test.

The CSI-SINR relative measurement accuracy shall fulfil the requirements in Clause 7.7.9.0.2.2.

Editor's note: The values of X and Y are pending on the accuracy requirement discussion.

Table 7.7.9.2.5-1: CSI-SINR Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
Time offset with Cell 1	µs	-	0.29	-	0.29	-	0.29
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1	SMTC.1	SMTC.1
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD					
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS EPRE ratio of PBCH_DMRS to SSS EPRE ratio of PBCH to PBCH_DMRS EPRE ratio of PDCCH_DMRS to SSS EPRE ratio of PDCCH to PDCCH_DMRS EPRE ratio of PDSCH_DMRS to SSS EPRE ratio of PDSCH to PDSCH_DMRS EPRE ratio of OCNG to SSS Note 1	dB	0	0	0	0	0	0
Propagation conditions		AWGN					
Antenna configuration		1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: CSI-SINR, CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 7.7.9.2.5-2: CSI-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	degrees	Setup 1 according to A.3.15.1 in TS 38.133 [6]		Setup 1 according to A.3.15.1 in TS 38.133 [6]		Setup 1 according to A.3.15.1 in TS 38.133 [6]	
Assumption for UE beams Note 10		Rough		Rough		Rough	

N_{oc} Note1	dBm/15kHz Note4	-105		-105.1		-105	
N_{oc} Note1	dBm/SCS Note3	-96		-96.1		-96	
CSI-RSRP Note2	dBm/SCS Note4	-96.47	-96.47	-85.07	-85.07	-98.07	-98.07
CSI-SINR Note2	dB	-0.98	-0.98	10.51	10.51	-2.58	-2.58
$\hat{E}_s/N_{oc}$ for SSB	dB	-0.5	-0.5	11	11	-2.1	-2.1
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	-0.5	-0.5	11	11	-2.1	-2.1
$\hat{E}_s/I_{ot}$ for SSB	dB	-0.98	-0.98	10.51	10.51	-2.58	-2.58
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	-0.98	-0.98	10.51	10.51	-2.58	-2.58
Io Note2	dBm/95.04 MHz Note4	-64.21		-55.75		-64.90	

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.
Note 6: NR operating band groups are as defined in Clause 3.5.2 in TS 38.133 [6].
Note 7: Void
Note 8: Void
Note 9: Void
Note 10: Information about types of UE beam is given in B.2.1.3 in TS 38.133 [6] and does not limit UE implementation or test system implementation.

Table 7.7.9.2.5-3: Evaluation limits for the reported values for T1, T2 and T3 absolute accuracy

UE power class 3						
Normal Conditions	**Test 1**		**Test 2**		**Test 3**	
Lowest reported value (Cell 1)	n257, n258, n261	SINR_37	n257, n258, n261	SINR_54	n257, n258, n261	SINR_33
	n260	SINR_36	n260	SINR_54	n260	SINR_32
	n259	FFS	n259	FFS	n259	FFS
Highest reported value (Cell 1)	n257, n258, n261	SINR_52	n257, n258, n261	SINR_81	n257, n258, n261	SINR_50
	n260	SINR_52	n260	SINR_80	n260	SINR_50
	n259	FFS	n259	FFS	n259	FFS
Lowest reported value (Cell 2)	n257, n258, n261	SINR_37	n257, n258, n261	SINR_54	n257, n258, n261	SINR_33
	n260	SINR_36	n260	SINR_54	n260	SINR_32
	n259	FFS	n259	FFS	n259	FFS
Highest reported value (Cell 2)	n257, n258, n261	SINR_52	n257, n258, n261	SINR_81	n257, n258, n261	SINR_50
	n260	SINR_52	n260	SINR_80	n260	SINR_50
	n259	FFS	n259	FFS	n259	FFS

Table 7.7.9.2.5-4: Evaluation limits for the reported values for T1, T2 and T3 relative accuracy

UE power class 3			
Normal Conditions	**Test 1**	**Test 2**	**Test 3**
Lowest value (SINR report Cell 2 – SINR report Cell 1)	-8	-17	-9
Highest value (SINR report Cell 2 – SINR report Cell 1)	8	17	9

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

7.7.10 to 7.7.13

7.7.14 L1-RSRP measurement for group-based beam reporting

7.7.14.1 NR SA FR2 SSB based L1-RSRP measurement for group-based beam reporting

Editor's note: This test case is incomplete. The following aspects are either missing or TBD:

- Test requirement shall require an update

- TT is missing.

- Configuration of 3AoA setup and testability of the device is still FFS.

7.7.14.1.1 Test Purpose

The purpose of this test is to verify that the L1-RSRP measurement accuracy for group-based beam reporting is within the specified limits. This test will verify the requirements as defined in clauses 9.5.2 and 10.1.20.1 of TS 38.133[6] for SSB based L1-RSRP measurements.

7.7.14.1.2 Test Applicability

This test applies to all types of NR PC3 UE release 18 onwards that support *groupBasedBeamReporting-r17*.

7.7.14.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 7.7.4.0.1 and 7.7.4.0.2

The normative reference for this requirement is TS 38.133 [6] clauses A.7.7.14.1

7.7.14.1.4 Test description

7.7.14.1.4.1 Initial conditions

The AoA setup for this test is Setup 5 as defined in clause A.9.5.

This test shall be tested using any of the test configurations in Table 7.7.14.1.4.1-1.

Table 7.7.14.1.4.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

1. Configure the test equipment and the DUT according to the parameters in Table 7.7.4.1.4.1-2.
2. Message contents are defined in clause 7.7.14.1.4.3.
3. The test scenario comprises of 1 NR FR2 Cell. There is no measurement gap configured in the test. Before the test, UE is configured two CSI resource sets with one SSB resource in each set.
4. UE is configured with *groupBasedBeamReporting-r17* for SSB index 0 and SSB index 1.
5. UE is configured to perform RLM and BFD based on SSB 0 and UE is configured to perform group-based L1-RSRP measurement based on the SSB resources 0 and 1.

7.7.14.1.4.2 Test procedure

Same as in clause 7.7.4.1.4.2 except Step 4 R1 scenario.

4. The UE shall start sending valid L1-RSRP reports, a valid report shall meet the absolute L1-RSRP requirement for SSB#0 and SSB#1 and the relative L1-RSRP requirement for SSB1. The SS shall check for the following requirements:

- R1: The L1-RSRP values of SSB#0 and SSB#1 are reported by the UE is compared to the expected L1-RSRP values for SSB#0 and SSB#1. If the value is outside the limits in Table TBD (depending on the test configuration) or the UE fails to report the measurement value for SSB#0 and SSB#1, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

7.7.14.1.4.3 Message contents

Message contents are same as in clause 7.7.4.1.4.3 with the following exceptions:

Table 7.7.4.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.6-2 with conditions PERIODIC, SS-RSRP and groupBasedBeamReporting as enabled Table H.3.6-3 with conditions SSB and PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

7.7.14.1.5 Test requirements

Same as in clause 7.7.4.1.5 with below exceptions:

After 320ms from the beginning of the test, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 1 shall fulfil the requirements as defined in clauses 7.7.4.0.1, 7.7.4.0.2 TS 38.133 [6] 10.1.20.1. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB0 and SSB1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table 7.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in TS 38.133 [6] Table 10.1.20.1.2-1.

For Test 2:

Absolute accuracy of SSB resource reported by UE in L1-RSRP report (SSB0 or SSB1). The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table 7.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in TS 38.133 [6] Table 10.1.20.1.2-1.

Table 7.7.14.1.5-1: FR2 SSB based L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			SSB0	SSB1	SSB0	SSB1
Angle of arrival configuration			Setup 5 according to A.9.5		Setup 5 according to A.9.5	
Assumption for UE beams Note 4			Rough		Rough	
N_{oc}	1~2	dBm/15 kHz	-100+TT		n.a.	
N_{oc}	1	dBm/SSB SCS	-91+TT		n.a.	
	2		-88+TT		n.a.	
$\hat{E}_s/I_{ot}$	1~2	dB	10+TT	-2+TT	n.a.	
SSB_RP Note1	1	dBm/SCS	-81+TT	-93+TT	As in Table B.2.4-2	
	2		-78+TT	-90+TT	As in Table B.2.4-2	
Io Note1	1~2	dBm/95.04MHz	-51.57+TT		SSB_RP+28.98	

$\hat{E}_s / N_{oc}$	1~2	dB	10+TT	-2+TT	n.a.
Note 1: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: Void Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.14.2 NR SA FR2 CSI-RS based L1-RSRP measurement on resource set with repetition off

Editor's note: This test case is incomplete. The following aspects are either missing or TBD:

- Test requirement shall require an update.

- TT is missing

- Configuration of 3AoA setup and testability of the device is still FFS

7.7.14.2.1 Test Purpose

The purpose of this test is to verify that the L1-RSRP measurement accuracy for group-based beam reporting is within the specified limits. This test will verify the requirements as defined in clauses 9.5.3 and 10.1.20.2 of TS 38.133 [6] for L1-RSRP measurements based on CSI-RS.

7.7.14.2.2 Test Applicability

This test applies to all types of NR UE from Release 17 onwards supporting *groupBasedBeamReporting-r17*.

7.7.14.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.4.0.3 and 7.7.4.0.4.

The normative reference for this requirement is TS 38.133 [6] clauses 9.5.3, 10.1.20.2 and A.7.7.14.2.

7.7.14.2.4 Test description

7.7.14.2.4.1 Initial conditions

Same as in clause 7.7.4.2.4.1 with the following exceptions:

The AoA setup for this test is Setup 5 as defined in clause A.9.5.

1. The general test parameter settings are set up according to Table 7.7.4.2.4.1-2.
2. Message contents are defined in clause 7.7.4.2.4.3.
3. The test scenario comprises of 1 NR FR2 Cell. There is no measurement gap configured in the test. Before the test, UE is configured two CSI resource sets with one CSI-RS resource in each set.
4. UE is configured with groupBasedBeamReporting-r17 for CSI-RS0 and CSI-RS1.
5. UE is configured to perform RLM and BFD based on SSB 0 and 1 and UE is configured to perform group-based L1-RSRP measurement based on the CSI resources.
6. CSI-RS resources are not transmitted in the same OFDM symbols as SSB. The connection setup is done according to the settings in Annex C.1.1.
7. The rx beam peak and directions in which the UE meets the EIS spherical coverage criteria have been found with one of the procedures from Annex I.

7.7.14.2.4.2 Test procedure

Same as in clause 7.7.4.2.4.2 except Step 4 R1 scenario.

4. The UE shall start sending valid L1-RSRP reports, a valid report shall meet the absolute L1-RSRP requirement for CSI-RS0 and the relative L1-RSRP requirement for CSI-RS1. The SS shall check for the following requirements:

   - R1: The L1-RSRP values of CSI-RS0 and CSI-RS1 are reported by the UE is compared to the expected L1-RSRP values for CSI-RS0 and CSI-RS1. If the value is outside the limits in Table TBD (depending on the test configuration) or the UE fails to report the measurement value for CSI-RS0 and CSI-RS1, the number of failed iterations for R1 is increased by one. Otherwise, the number of passed iterations for R1 is increased by one.

7.7.14.2.4.3 Message contents

Same as in clause 7.7.4.2.4.3 with the following exceptions:

Table 7.7.4.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.6-2 with conditions PERIODIC, CSI-RSRP and groupBasedBeamReporting as enabled Table H.3.6-3 with conditions CSI-RS and PERIODIC Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

7.7.14.2.5 Test requirements

Same as in clause 7.7.4.2.5 with the following exceptions:

After 640ms from the beginning of the test, the L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements as defined in clauses 7.7.4.0.3, 7.7.4.0.4 and in TS 38.133[6] clause 10.1.20.2. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0 and CSI-RS1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in TS 38.133[6] clause A.7.7.4.2.3 Table A.7.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements defined in TS 38.133 [6] Table 10.1.20.2.2-1.

. For Test 2:

Absolute accuracy of CSI-RS resource reported by UE in L1-RSRP report (CSI-RS0 or CSI-RS1). The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in TS 38.133[6] clause A.7.7.4.2.3 Table A.7.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements defined in TS 38.133 [6] in Table 10.1.20.2.2-1.

Table 7.7.14.2.5-1: FR2 CSI-RS based L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 NOTE 3	
			CSI-RS0	CSI-RS1	CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 5 according to A.9.5		Setup 5 according to A.9.5	
Assumption for UE beams Note 4			Rough		Rough	
N_{oc}	1~2	dBm/15 kHz	-100+TT		n.a.	

N_{oc}	1~2	dBm/SSB SCS	-91+TT		n.a. n.a.
$\hat{E}_s / I_{ot}$	1~2	dB	10+TT	-2+TT	n.a.
CSI-RS-RSRP[Note1]	1~2	dBm/SCS	-81+TT	-93+TT	As in Table B.2.4-2
Io[Note1]	1~2	dBm/ 95.04MHz	-59.86+TT		SS-RSRP+28.98
$\hat{E}_s / N_{oc}$	1~2	dB	-51.57+TT	-2+TT	n.a.
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

7.7.15 LTM L1-RSRP measurement

7.7.15.0 Minimum conformance requirements

7.7.15.0.1 SSB based absolute L1-RSRP measurement accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of candidate neighbour cell(s) on a frequency in FR2 that is on a different frequency than the serving cell.

The accuracy requirements in Table 7.7.15.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to TS 38.133 [6] Annex B.2.4.1 for a corresponding band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 7.7.15.0.1-1: SSB based L1-RSRP absolute accuracy in FR2

Accuracy		**Conditions**			
Normal condition	**Extreme condition**	**SSB Ês/Iot**	**Io[NOTE 1] range**		
			Minimum Io		**Maximum Io**
dB	**dB**	**dB**	**dBm / SCS_{SSB}[NOTE 2]**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
			SCS_{SSB} = 120kHz	**SCS_{SSB} = 240kHz**		
±6.5	±9.5	≥-3	Same value as SSB_RP in TS 38.133 [6] Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±8.5	±11.5	≥-3	N/A		-70	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth. NOTE 2: Values based on REFSENS and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival. NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.						

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.20B.1.1 and 10.1.6.

7.7.15.0.2 SSB based relative L1-RSRP measurement accuracy requirements

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured on one SSB configured in *LTM-CSI-ResourceConfig* on one cell on a frequency in FR2 compared to the value of L1-RSRP measured from another SSB configured in *LTM-CSI-ResourceConfig* from any other cell on another frequency in FR2.

The accuracy requirements in Table 7.7.15.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to TS 38.133 [6] Annex B.2.4.1 for a corresponding band for each relevant SSB.
- |SSB_RP1 dBm - SSB_RP2 dBm| ≤ 27 dB
- |Channel 1_Io - Channel 2_Io| ≤ 20 dB
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [3].

Table 7.7.15.0.2-1: SSB based L1-RSRP relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io[NOTE 1] range		
			Minimum Io		Maximum Io
			dBm / SCS_{SSB}[NOTE 3]		
dB	dB	dB	SCS_{SSB} = 120kHz	SCS_{SSB} = 240kHz	$dBm/BW_{Channel}$
±6.5	±9.5	≥-3	Same value as SSB_RP in TS 38.133 [6] Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival		-50

NOTE 1: Io specified at the Reference point and assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of SSBs to which the requirement applies.
NOTE 3: Values based on REFSENS and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [3]. Applicable side condition selected depending on angle of arrival.
NOTE 4: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.20B.1.2 and 10.1.6

7.7.15.1 NR SA FR2 SSB based inter-frequency L1-RSRP measurement

Editor's Note: This test case is incomplete in following aspects:

- LTM specific configurations are missing.
- Test applicability is FFS.
- TT analysis is missing.
- Test parameters contain [ ].

7.7.15.1.1 Test purpose

The purpose of this test is to verify that the SSB based inter-frequency L1-RSRP absolute measurement accuracy on neighbor cell is within the limits for all bands specified in TS 38.133 [6] clause 10.1.20B.

7.7.15.1.2 Test applicability

This test applies to all types of NR UE supporting SSB based inter-frequency L1-RSRP measurements with measurement gaps and reports for LTM from release 18 and forward.

7.7.15.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.7.15.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.7.7.15.1.

7.7.15.1.4 Test description

7.7.15.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 7.7.15.1.4.1-1.

Table 7.7.15.1.4.1-1: Supported test configurations

Test Case ID	Description
7.7.15.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
7.7.15.1-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Test environment parameters are given in Table 7.7.15.1.4.1-2.

Table 7.7.15.1.4.1-2: Test environment parameters

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 7.7.15.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	Without LTE link		

1. The general test parameter settings are set up according to Table 7.7.15.1.4.1-3.
2. Message contents are defined in clause 7.7.15.1.4.3.
3. There are two NR carriers and one cell on each carrier in the test. Cell 1 (Pcell) is on NR RF channel 1, and is the cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test. Cell 2 (inter neighbour cell) is on NR RF channel 2.
4. The AoA setup for this test is Setup 1 as defined in clause A.9. The UE RX beam peak direction has been obtained previously using one of the search procedures as described in Annex I.

Table 7.7.15.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
Active cell		Cell 1	
Neighbouring cell		Cell 2	Cell 2 is the candidate cell
RF Channel Number		1: Cell 1 2: Cell 2	
Filter coefficient		0	L3 filtering is not used
reportQuantityRS-Indexes		rsrp	
maxNrofRS-IndexesToReport		1	
includeBeamMeasurements		true	
DRX		OFF	DRX is not used
Time offset between cells		3 μs	The timing of Cell 2 is later than the timing of Cell 1
Gap Pattern Id		13	

Measurement gap offset		ms	39	
LTM-CSI-ReportConfig	ltm-ResourcesForChannelMeasurement		SSB#0	Candidate Cell 2's SSB index for L1-RSRP measurement
	reportConfigType		periodic	Periodic L1-RSRP reporting configured
	L1-RSRP reporting period	slot	320	
	nrOfReportedCells		n1	Report candidate cell's (Cell 2) L1-RSRP measurement results.
	nrOfReportedRS-PerCell		n1	
	spCellInclusion		N/A	
ltm-ConfigComplete			true	Candidate cell's configuration is complete configuration

7.7.15.1.4.2 Test procedure

UE is indicated to perform inter-frequency L1-RSRP measurement on the SSBs and report periodically.

There are two tests in the test case, test 1 and test 2:

- In test 1, test at the highest power level below maximum Io.
- In test 2, test at the lowest power level above minimum SSB_RP.

Measurement gap pattern configuration defined in Table 7.7.15.1.4.1-3 is provided.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Test 1 in Table 7.7.15.1.5-1.
3. SS shall transmit *RRCReconfiguration* message to configure Event A4 triggered measurement report.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. The UE shall transmit *MeasurementReport* message triggered by Event A4 including Cell 2 measurement report with SSB index.
6. SS shall transmit *RRCReconfiguration* message to configure *LTM-Candidate-r18* for Cell 2. UE is configured with SSB-based L1-RSRP measurements and periodic L1-RSRP measurement reports for candidate Cell 2 in PUCCH format 2.
7. The UE shall transmit *RRCReconfigurationComplete* message.
8. The UE shall transmit L1-RSRP on PUCCH format 2 in Cell 1 with a periodicity of 320 slots.
9. After 10s wait from Step 6, the SS shall check the values in the periodic measurement report. The L1-RSRP value of Cell 2 reported by the UE is compared to the expected L1-RSRP value. If the reported value is outside the limits in Table 7.7.15.1.5-3 for test configuration 1 and in Table 7.7.15.1.5-4 for test configuration 2, or if the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
10. The SS shall continue checking the L1-RSRP report transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
11. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
12. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
13. After the RRC connection release, the SS:

    - transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE and ensures the UE in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and

on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.),

OR

- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR SA, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

14. Set the parameters according to each test in Table 7.7.15.1.5-1 as appropriate and repeat steps 3-13.

7.7.15.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 7.3 with the following exceptions:

Table 7.7.15.1.4.3-1: Common Exception messages (step 3)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with conditions INTER-FREQ and GAP NEEDED Table H.3.1-5 with condition SSB Index Table H.3.1-6 with conditions gapUE and Pattern #13 Table H.3.1-7 with conditions INTER-FREQ and SSB Index
Specific message contents exceptions for Cell 2	Table H.3.1-3 with condition INTER-FREQ MO Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 7.7.15.1.4.3-2: MeasObjectNR for Cell 2 (Step 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
offsetMO ::= SEQUENCE {			
rsrpOffsetSSB	[dB16]		
}			
}			

Table 7.7.15.1.4.3-3: ReportConfigNR (a4-threshold) (step3)

Derivation Path: Table H.3.1-4AA			
Information Element	Value/remark	Comment	Condition
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA4 SEQUENCE {			
a4-Threshold CHOICE {			
rsrp	[36]	The actual value is (IE value – 156) dBm	
}			
hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
maxReportCells	1		
reportQuantityRS-Indexes SEQUENCE {			
rsrp	true		
rsrq	false		
sinr	false		
}			
maxNrofRS-IndexesToReport	1		
includeBeamMeasurements	true		
}			

}			
}			

Table 7.7.15.1.4.3-4: Common Exception messages (step 6)

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.12-1 with condition L1-RSRP Table H.3.12-2 with condition L1-RSRP Table H.3.12-3 Table H.3.12-4 Table H.3.12-5 with condition [TBD] Table H.3.12-6 Table H.3.12-8 Table H.3.12-9 with conditions FR2 and SSB#0

7.7.15.1.5 Test requirement

Table 7.7.15.1.5-1 and Table 7.7.15.1.5-2 define the primary level settings including test tolerances for all tests.

Table 7.7.15.1.5-1: Cell specific test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~2		freq1	freq2	freq1	freq2
$BW_{channel}$	1~2		100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated	1~2		66		66	
Duplex mode	1~2		TDD		TDD	
TDD configuration	1~2		TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel	1		SR.3. 2 TDD	-	SR.3. 2 TDD	-
	2		SR.3.3 TDD		SR.3.3 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	-	CR.3.1 TDD	-
	2		CR.3.2 TDD		CR.3.2 TDD	
Control Channel RMC	1		CCR.3.1 TDD	-	CCR.3.1 TDD	-
	2		CCR.3.7 TDD		CCR.3.7 TDD	
SSB configuration	1		SSB.3 FR2		SSB.3 FR2	
	2		SSB.4 FR2		SSB.4 FR2	
PDSCH/PDCCH subcarrier spacing	1~2	kHz	120		120	
OCNG Patterns	1~2		OP.1		OP.1	
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~2		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2		TCI.State.2	
SMTC configuration	1~2		SMTC.1		SMTC.1	
EPRE ratio of PSS to SSS	1~2	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS[Note 1]						
EPRE ratio of OCNG to OCNG DMRS[Note 1]						
Propagation condition	1~2	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration	1~2	-	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 7.7.15.1.5-2: NR OTA cell specific test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	1~2		Setup 1 according to A.9.1		Setup 1 according to A.9.1	
Assumption for UE beams[Note 4]	1~2		Rough		Rough	
N_{oc}[Note 1]	1	dBm/15kHz[Note 4]	-100+TT		N/A	
	2					
N_{oc}[Note 1]	1	dBm/SCS[Note 4]	-91+TT		N/A	
	2		-88+TT		N/A	
$\hat{E}s/N_{oc}$	1~2	dB	10+TT	-2+TT	N/A	
$\hat{E}s/Iot$[Note 2]	1~2	dB	10+TT	-2+TT	N/A	
SSB_RP[Note 2]	1	dBm/SCS	-81+TT	-93+TT	As in TS 38.133 [6] Table B.2.4.1-2+TT	
	2		-78+TT	-90+TT	As in TS 38.133 [6] Table B.2.4.1-2+TT	
Io[Note 2]	1	dBm/95.04MHz[Note 3]	-51.57+TT	-59.86+TT	SSB_RP+28.98+TT	
	2		-51.57+TT	-59.86+TT	SSB_RP+28.98+TT	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SSB_RP, Es/Iot, Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.
Note 4: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.

Each L1-RSRP measurement report of Cell 2 in each test shall meet the corresponding absolute accuracy requirements in Table 7.7.15.1.5-3 for test configuration 1, and the corresponding absolute accuracy requirements in Table 7.7.15.1.5-4 for test configuration 2.

Table 7.7.15.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 1

UE power class 3			
Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	TBD	n257, n258, n261	TBD
		n259	TBD
		n260	TBD
		n262	TBD
Highest reported value (Cell 2)	TBD	n257, n258, n261	TBD
		n259	TBD
		n260	TBD

		n262	TBD
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	TBD	n257, n258, n261	TBD
		n259	TBD
		n260	TBD
		n262	TBD
Highest reported value (Cell 2)	TBD	n257, n258, n261	TBD
		n259	TBD
		n260	TBD
		n262	TBD

Table 7.7.15.1.5-4: L1-RSRP absolute accuracy requirements for the reported values for test configuration 2

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	TBD	n257, n258, n261	TBD
		n259	TBD
		n260	TBD
		n262	TBD
Highest reported value (Cell 2)	TBD	n257, n258, n261	TBD
		n259	TBD
		n260	TBD
		n262	TBD
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	TBD	n257, n258, n261	TBD
		n259	TBD
		n260	TBD
		n262	TBD
Highest reported value (Cell 2)	TBD	n257, n258, n261	TBD
		n259	TBD
		n260	TBD
		n262	TBD

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

8 E-UTRA - NR inter-RAT with E-UTRA serving cell

8.0 General

This clause contains test scenarios for E-UTRA - NR inter-RAT with the serving cell in E-UTRA. The NR cells can be in FR1, FR2 or both.

For conformance testing involving FR2 test cases in this specification, the UE under test shall be pre-configured with UL Tx diversity schemes disabled to account for single polarization System Simulator (SS) in the test environment. The UE under test may transmit with dual polarization.

8.1 Void

8.2 RRC_IDLE state mobility

8.2.1 Inter-RAT cell re-selection

8.2.1.0 Minimum conformance requirements

8.2.1.0.1 Minimum conformance requirements for E-UTRA-NR FR1 inter-RAT cell reselection

[TS 36.133, clause 4.2.1]

When the UE is in either *Camped Normally* state or *Camped on Any Cell* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. UE measurement activity is also controlled by measurement rules defined in TS36.304, allowing the UE to limit its measurement activity.

[TS 36.133, clause 4.2.2]

The UE shall search every layer of higher priority at least every $T_{higher_priority_search}$ = (60 * N_{layers}) seconds when the UE is not configured with eDRX_IDLE cycle, and at least every $T_{higher_priority_search}$ = MAX(60 * N_{layers}, one eDRX_IDLE cycle) when UE is configured with eDRX_IDLE cycle, where N_{layers} is the total number of configured higher priority E-UTRA, UTRA FDD, UTRA TDD, CDMA2000 1x, HRPD and NR carrier frequencies and is additionally increased by one if one or more groups of GSM frequencies is configured as a higher priority.

[TS 36.133, clause 4.2.2.5.6]

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-RAT NR layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 36.133 clause 4.2.2.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-RAT NR layers of higher, lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT NR layers shall be the same as that defined below for lower priority RATs.

The requirements in this clause apply for inter-RAT NR measurements. When the measurement rules indicate that inter-RAT NR cells are to be measured, the UE shall measure SS-RSRP and SS-RSRQ of detected NR cells in the neighbour frequency list at the minimum measurement rate specified in this clause.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$, a carrier is indicated to meet high speed requirement if *highSpeedInterRAT-NR-r16* is configured and the carrier to be measured is configured with *highSpeedCarrierNR-r16*. If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$, the UE is required to meet non high speed requirements no matter whether *highSpeedInterRAT-NR-r16* or *highSpeedCarrierNR-r16* is configured or not. The parameter $N_{NR_carrier}$ is the number of configured NR carriers indicated to meet non high speed requirement in the neighbour frequency list. $N_{NR_carrier_HST}$ is the number of configured carriers for reselection indicated to meet high speed requirements. The

parameter $N_{NR_carrier}$ for a UE configured with idle mode DC measurements (while T331 is running) is the combined number of configured NR carriers indicated to meet non high speed requirement in the neighbour frequency list, and NR carriers configured for idle mode DC measurements.

NOTE: Combined total number means that if a carrier is indicated in the neighbour frequency list and additionally a carrier configured for idle mode DC measurements, it only counts as one carrier.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured NR cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period.

The UE shall be able to evaluate whether a newly detectable inter-RAT NR cell meets the reselection criteria defined in TS 36.304 [1] within $N_{NR_carrier_HST} * T_{detect,\ NR_HST} + N_{NR_carrier} * T_{detect,\ NR}$

when $Srxlev \leq S_{nonIntraSearchP}$ or $Squal \leq S_{nonIntraSearchQ}$ when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 5 dB in FR1 or 6.5 dB in FR2 for reselections based on ranking or 6 dB in FR1 or 7.5 dB in FR2 for SS-RSRP reselections based on absolute priorities or 4 dB in FR1 and 4 dB in FR2 for SS-RSRQ reselections based on absolute priorities.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell.

If the UE detects on an inter-RAT NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall not consider an inter-RAT NR cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

Cells which have been detected shall be measured at least every $N_{NR_carrier_HST} * T_{measure,\ NR_HST} + N_{NR_carrier} * T_{measure,\ NR}$ when $Srxlev \leq S_{nonIntraSearchP}$ or $Squal \leq S_{nonIntraSearchQ}$.

For a cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified inter-RAT NR cell has met reselection criterion defined in TS 36.304 [1] within $N_{NR_carrier_HST} * T_{evaluate,\ NR_HST} + N_{NR_carrier} * T_{evaluate,\ NR}$ when $T_{reselection} = 0$ as specified in Table 8.2.1.0.1-1 and table 8.2.1.0.1-2 provided that the reselection criteria is met by a margin of at least 5dB in FR1 or 6.5 dB in FR2 for reselections based on ranking or 6 dB in FR1 or 7.5 dB in FR2 for SS-RSRP reselections based on absolute priorities or 4 dB in FR1 and 4 dB in FR2 for SS-RSRQ reselections based on absolute priorities.

If $T_{reselection}$ timer has a non-zero value and the inter-RAT NR cell is satisfied with the reselection criteria which are defined in TS 36.304 [1], the UE shall evaluate this NR cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

Table 8.2.1.0.1-1: $T_{detect,NR}$, $T_{measureNR,}$ and $T_{evaluate,NR}$

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR}$ [s] (number of DRX cycles)	$T_{measure,NR}$ [s] (number of DRX cycles)	$T_{evaluate,NR}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x 1.5 x N1 (36 x 1.5 x N1)	1.28 x 1.5 x N1 (4 x 1.5 x N1)	5.12 x 1.5 x N1 (16 x 1.5 x N1)
0.64		5	17.92 x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
NOTE: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, N1 = 8 for all DRX cycle length.					

Table 8.2.1.0.1-2: T_{detect,NR_HST}, $T_{measureNR_HST}$, and $T_{evaluate,NR_HST}$ for UE configured with highSpeedInterRAT-NR-r16

DRX cycle length [s]	T_{detect,NR_HST} [s] (number of DRX cycles)	$T_{measure,NR_HST}$ [s] (number of DRX cycles)	$T_{evaluate,NR_HST}$ [s] (number of DRX cycles)
0.32	4.16 x M2 (13 x M2) Note 2	0.64 x M3 (2 x M3) Note 2	0.96 x M4 (3 x M4) Note 2
0.64	7.68 (12))	1.28 (2)	1.92 (3)
1.28	12.8(10)	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)
NOTE 1: FR2 high speed requirements are not specified. NOTE 2: M2=1.5, M3=2 and M4=2 if SMTC periodicity of measured intra-frequency cell > 40 ms; otherwise M2=1.			

The normative reference for this requirement is TS 36.133 clause 4.2.1, 4.2.2, 4.2.2.5.6.

8.2.1.1 E-UTRA - NR FR1 cell re-selection to higher priority NR target cell

8.2.1.1.1 Test purpose

The purpose of this test is to verify the requirement for the E-UTRAN to NR inter-RAT cell reselection requirements specified in TS 36.133 [23] clause 4.2.2.5.6.

8.2.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards.

8.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.2.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.8.2.1.1.

8.2.1.1.4 Test description

There are two cells configured in this test, the E-UTRA Cell 1 and NR Cell 2. NR Cell 2 is the PCell and E-UTRA Cell 1 is the neighbour cell. This test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. E-UTRA Cell 1 is already identified by the UE prior to the start of the test. Cell 2 is of higher priority than cell 1.

8.2.1.1.4.1 Initial conditions

This test shall be tested under any of the test configuration in Table 8.2.1.1.4.1-1.

Table 8.2.1.1.4.1-1: Supported test configurations

Configuration	Description
8.2.1.1-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.2.1.1-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.2.1.1-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8.2.1.1-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.2.1.1-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.2.1.1-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.2.1.1.4.1-2.

Table 8.2.1.1.4.1-2: Initial conditions for E-UTRA - NR FR1 cell re-selection to higher priority NR target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.2.1.1.4.1-3.
2. Message contents are defined in clause 8.2.1.1.4.3.
3. The test scenario comprises of one NR cell and one E-UTRAN cell. NR Cell 2 is the PCell and E-UTRA Cell 1 is the neighbour cell. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clauses C.1.0 and C.1.1 and NR Cell 2 is configured according to clauses C.1.1 and C.1.2.

Table 8.2.1.1.4.1-3: General test parameters for E-UTRA - NR FR1 cell re-selection to higher priority NR target cell

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE camps on cell 2 in the initial phase
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell1	
T1 end condition	Active cell			Cell1	During T1 period the UE reselects to cell 1
	Neighbour cell			Cell2	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T3
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
RF Channel Number			1, 2, 3, 4, 5, 6	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2, 5	3 µs	Synchronous cells
			3, 6	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
T1		s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	1, 2, 3, 4, 5, 6	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

8.2.1.1.4.2 Test procedure

Two cells are deployed in the test, which are one NR PCell (NR Cell 2) and a E-UTRA neighbour cell (E-UTRA Cell 1). The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. E-UTRA Cell 1 is already identified by the UE prior to the start of the test. NR Cell 2 is of higher priority than E-UTRA Cell 1.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure.

1. The SS shall send a *RRCRelease* message on NR Cell 2 to ensure the UE is in State RRC_IDLE with generic procedure parameters connectivity = *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

2. The SS shall set the parameters according to T1 in Table 8.2.1.1.5-1 and 8.2.1.1.5-2 at the same time instance *RRCRelease* message is sent on NR Cell 2, T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, E-UTRA Cell 1.

4. If the UE responds on lower priority cell, E-UTRA Cell 1 during time duration T1 within 8 seconds from the beginning of time period T1, then count a success for the event "Re-select lower priority Cell 1". Otherwise count a fail for the event "Re-select lower priority Cell 1".

5. If the UE has re-selected E-UTRA Cell 1 within T1, after the re-selection or when T1 expires, continue with step 5a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.

5a. The SS shall send an *RRCConnectionRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 8.2.1.1.5-1. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) shall be changed to ensure Cell 2 is not detected by the UE, T2 starts.

7. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 8.2.1.1.5-1, T3 starts.

8. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, NR Cell 2.

9. If the UE responds on higher priority cell, NR Cell 2 during time duration T3 within 68 seconds from the beginning of time period T3, then count a success for the event "Re-select higher priority Cell 2". Otherwise count a fail for the event "Re-select higher priority Cell 2".

10. If the UE has re-selected Cell 2 within T3, after the re-selection or when T3 expires, continues with step 10a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and continue with step 11.

10a. The SS shall send an *RRCRelease* message on NR Cell 2 to ensure that the UE is in state RRC_IDLE with generic procedure parameters connectivity = NR with Test Mode On according to TS 38.508-1 [14] clause 4.5 on Cell 2.

11. The SS shall set the parameters according to T1 in Table 8.2.1.1.5-1 and 8.2.1.1.5-2 at the same time instance *RRCRelease* message is sent on NR Cell 2.

12. Repeat step 2-11 until a test verdict has been achieved.
Each of the events "Re-select lower priority Cell 1" and "Re-select higher priority Cell 2" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
If both events pass, the test passes. If one event fails, the test fails.

8.2.1.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.2.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.3-1 Table H.2.3-2 with condition lower priority Table H.2.3-3 with condition lower priority

Default RRC messages and information elements contents exceptions	

Table 8.2.1.1.4.3-2: *SystemInformationBlockType3*

Derivation Path: TS 36.508 Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearch	25	Actual value = 50 dB	
threshServingLow	22	Actual value = 44 dB	
}			
}			

Table 8.2.1.1.4.3-3: SystemInformationBlockType24

Derivation Path: TS 36.508, Table 4.4.3.3-20 with Condition FR1			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
measTimingConfig-r15[1] SEQUENCE {			
periodicityAndOffset-r15 CHOICE {			
sf20-r15	0		
}			
ssb-Duration-r15	sf5	Asynchronous cells	Configuration 1,4
	sf2	Synchronous cells	Configuration 2,3,5,6
}			
subcarrierSpacingSSB-r15[1]	kHz15		Configuration 1,2,4,5
	kHz30		Configuration 3,6
threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
q-RxLevMin-r15[1]	-70	Actual value = -140 dBm	Configuration 1,2,4,5
	-69	Actual value = -137 dBm, Round down	Configuration 3,6
}			
}			

Table 8.2.1.1.4.3-4: Void

Table 8.2.1.1.4.3-5: Void

8.2.1.1.5 Test requirement

Tables 8.2.1.1.4.1-3, 8.2.1.1.5-1 and 8.2.1.1.5-2 define the primary level settings including test tolerances for higher priority NR cell re-selection test case.

Table 8.2.1.1.5-1: NR Cell specific test parameters for E-UTRA - NR FR1 cell re-selection to higher priority NR target cell

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 4	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH Reference measurement channel		1, 4	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1, 4	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
RMC CORESET Reference Channel		1, 4	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		
SMTC configuration		1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
Pcompensation	dB	1, 2, 3, 4, 5, 6	0		
$Qhyst_s$	dB	1, 2, 3, 4, 5, 6	0		
$Qoffset_{s,n}$	dB	1, 2, 3, 4, 5, 6	0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6	SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4	-3.65	-infinity	13.55
		2, 5			
		3, 6			
N_{oc} Note2	dBm/SCS	1, 4	-99.90	-98	-98
		2, 5	-99.90	-98	-98
		3, 6	-96.90	-95	-95
N_{oc} Note2	dBm/15 kHz	1, 4	-99.90	-98	-98
		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 4	-3.65	-infinity	13.55
		2, 5			
		3, 6			
SS-RSRP Note3	dBm/SCS	1, 4	-103.55	-infinity	-84.45
		2, 5	-103.55	-infinity	-84.45
		3, 6	-100.54	-infinity	-81.44
Io	dBm/9.36 MHz	1, 4	-70.39	-70.05	-56.31
	dBm/9.36 MHz	2, 5	-70.39	-70.05	-56.31
	dBm/38.16 MHz	3, 6	-64.29	-63.94	-50.21
Treselection	s	1, 2, 3, 4, 5, 6	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	50		
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6	48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6	44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4, 5, 6	50		
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.2.1.1.5-2: E-UTRA Cell specific test parameters for E-UTRA - NR FR1 cell re-selection to higher priority NR target cell

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc} Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 KHz	-84	-84	-82.45
$\hat{E}_s / I_{ot}$	dB	14	14	15.55
$\hat{E}_s / N_{oc}$	dB	14	14	15.55
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	50		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$	dB	50		
Propagation Condition		AWGN		

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell reselection delay to a higher priority NR cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate, NR} + T_{SI-NR,}$ and to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN} + T_{SI-E-UTRA}$,

Where:

$T_{higher_priority_search}$ is the higher priority search period, $T_{higher_priority_search}$ = 60 s according to TS 36.133 [23], clause 4.2.2;

$T_{evaluate, NR}$ is the evaluation time for NR Cell, $T_{evaluate, NR}$ = 6400 ms according TS 36.133 [23], Table 4.2.2.5.6-1;

T_{SI-NR} is the maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; T_{SI-NR} = 1280 ms is assumed in this test case.

$T_{evaluate, E-UTRAN}$ is the evaluation time for E-UTRAN Cell, $T_{evaluate, E-UTRAN}$ = 6400 ms according TS 38.133 [6], Table 4.2.2.5-1;

$T_{SI-E-UTRA}$ is the maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; $T_{SI-E-UTRA}$ = 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority NR cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

8.2.1.2 E-UTRA - NR FR1 Cell reselection to lower priority NR target Cell in FR1 for UE configured with highSpeedInterRAT-NR-r16

8.2.1.2.1 Test purpose

The purpose of this test is to verify the requirement for the E-UTRAN to NR inter-RAT cell reselection requirements specified in TS 36.133 [23] clause 4.2.2.5.6.

8.2.1.2.2 Test applicability

This test applies to all types of NR UE configured with highSpeedInterRAT-NR-r16 from Release 15 onwards.

8.2.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.2.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.8.2.1.2.

8.2.1.2.4 Test description

8.2.1.2.4.1 Initial conditions

This test shall be tested under any of the test configuration in Table 8.2.1.2.4.1-1.

Table 8.2.1.2.4.1-1: Supported test configurations

Configuration	Description
8.2.1.2-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.2.1.2-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.2.1.2-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8.2.1.2-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.2.1.2-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.2.1.2-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.2.1.2.4.1-2.

Table 8.2.1.2.4.1-2: Initial conditions for E-UTRA - NR FR1 cell re-selection to lower priority NR target cell in FR1 for UE configured with highSpeedInterRAT-NR-r16

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.2.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 8.2.1.2.4.1-3.
2. Message contents are defined in clause 8.2.1.2.4.3.
3. The test scenario comprises of one NR cell and one E-UTRAN cell. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1 and NR Cell 2 is configured according to clauses C.1.1 and C.1.2.
4. In SIB of the E-UTRA cell, highSpeedInterRAT-NR-r16 is configured and the carrier of NR cell is configured with highSpeedCarrierNR-r16.

Table 8.2.1.2.4.1-3: General test parameters for E-UTRA - NR FR1 cell re-selection to lower priority NR target cell in FR1 for UE configured with highSpeedInterRAT-NR-r16

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
RF Channel Number			1, 2, 3, 4, 5, 6	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2, 5	3 µs	Synchronous cells
			3, 6	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	0.32	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
T1		s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

8.2.1.2.4.2 Test procedure

Two cells are deployed in the test, which are one E-UTRA Cell 1 and NR Cell 2. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cells are already identified by the UE prior to the start of the test. NR Cell 2 is of lower priority than E-UTRA Cell 1. UE is camped on E-UTRA Cell 1 during the initial phase of the test.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure.

1. Ensure the UE is in State RRC_IDLE with generic procedure parameters Connectivity EUTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T2 in Table 8.2.1.2.5-1 and 8.2.1.2.5-2. Then wait 5s to ensure that Cell 2 has been detected by the UE.
3. Set the parameters according to T1 in Table 8.2.1.2.5-1 and 8.2.1.2.5-2, T1 starts.

4. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority NR Cell 2.

5. If the UE responds on lower priority cell, NR Cell 2 during time duration T1 within 3 seconds from the beginning of time period T1, then count a success for the event "Re-select lowe priority Cell 2". Otherwise count a fail for the event "Re-select lower priority Cell 2".

6. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 7. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, skip to step 10.

7. The SS shall switch the power setting from T1 to T2 as specified in Table Table 8.2.1.2.5-1 and 8.2.1.2.5-2. T2 starts.

8. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority E-UTRA Cell 1.

9. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, skip to step 11. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and continue with step 10.

10. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity EUTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 in Cell 1.

11. Repeat step 3-9 the confidence level according to Table G.2.3-1 in Annex G is achieved.

8.2.1.2.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.2.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-3 with Condition HighSpeedMeas Table H.2.3-1 Table H.2.3-2 with condition higher priority Table H.2.3-3 with condition higher priority
Default RRC messages and information elements contents exceptions	

Table 8.2.1.2.4.3-2: SystemInformationBlockType3

Derivation Path: TS 36.508 [25] Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearch	25	Actual value = 50 dB	
threshServingLow	22	Actual value = 44 dB	
cellReselectionPriority	5		higher priority E-UTRA
}			
}			

Table 8.2.1.2.4.3-3: highSpeedCarrierNR-r16 in SystemInformationBlockType24

Derivation Path: TS 36.508, Table 4.4.3.3-20 with Condition FR1			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
measTimingConfig-r15[*n*] SEQUENCE {			
periodicityAndOffset-r15 CHOICE {			

sf20	0		
}			
ssb-Duration-r15	sf5	Asynchronous cells	Configuration 1,4
	sf2	Synchronous cells	Configuration 2,3,5,6
}			
subcarrierSpacingSSB-r15[1]	kHz15		Configuration 1,2,4,5
	kHz30		Configuration 3,6
cellReselectionPriority-r15[*n*]	4		higher priority E-UTRA
threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
q-RxLevMin-r15[1]	-70	Actual value = -140 dBm	Configuration 1,2,4,5
	-69	Actual value = -137 dBm, Round down	Configuration 3,6
}			
carrierFreqListNR-v1610 ::= SEQUENCE {(SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
highSpeedCarrierNR-r16	TRUE		
}			

Table 8.2.1.2.4.3-4: highSpeedInterRAT-NR-r16 configuration

Derivation Path: TS 36.508 Table 4.6.3-14			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioResourceConfigCommonSIB::= SEQUENCE {			
highSpeedInterRAT-NR-r16	TRUE		
}			

Table 8.2.1.2.4.3-5: *SIB2*

Derivation Path: TS 38.508-1, Table 4.6.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
}			
}			

Table 8.2.1.2.4.3-6: SIB5

Derivation Path: Table H.2.3-3 with Condition higher priority			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB5 ::= SEQUENCE {			
carrierFreqListEUTRA-v1610 SEQUENCE (SIZE (1..maxEUTRA-Carrier)) OF CarrierFreqEUTRA-v1610 {	1 entry	carrierFreqListEUTRA-v1610 and carrierFreqListEUTRA contain same number of entries. And the entries are listed in the same order	
CarrierFreqEUTRA-v1610[1] SEQUENCE {		entry 1	
highSpeedEUTRACarrier-r16	true		
}			
}			
}			

8.2.1.2.5 Test requirement

Tables 8.2.1.2.4.1-3, 8.2.1.2.5-1 and 8.2.1.2.5-2 define the primary level settings including test tolerances for higher priority E-UTRA cell re-selection test case.

Table 8.2.1.2.5-1: NR Cell specific test parameters for E-UTRA - NR FR1 cell re-selection to lower priority NR target cell for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH Reference measurement channel		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET Reference Channel		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
RMC CORESET Reference Channel		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration		1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
Pcompensation	dB	1, 2, 3, 4, 5, 6	0	
$Qhyst_s$	dB	1, 2, 3, 4, 5, 6	0	
$Qoffset_{s,n}$	dB	1, 2, 3, 4, 5, 6	0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6	SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	1, 4	17.45	14
		2, 5		
		3, 6		
N_{oc} Note2	dBm/SCS	1, 4	-99.9	
		2, 5	-99.9	
		3, 6	-96.9	
N_{oc} Note2	dBm/15 kHz	1, 4	-99.9	
		2, 5		
		3, 6		
$\hat{E}_s/N_{oc}$	dB	1, 4	17.45	14
		2, 5		
		3, 6		
SS-RSRP Note3	dBm/SCS	1, 4	-82.45	-85.90
		2, 5	-82.45	-85.90
		3, 6	-79.45	-82.90
Io	dBm/9.36 MHz	1, 4	-54.42	-57.78
	dBm/9.36 MHz	2, 5	-54.42	-57.78
	dBm/38.16 MHz	3, 6	-48.32	-51.68
Treselection	s	1, 2, 3, 4, 5, 6	0	

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
Snonintrasearch	dB	1, 2, 3, 4, 5, 6	Not sent	
$Thresh_{x, high}$	dB	1, 2, 3, 4, 5, 6	48	
$Thresh_{serving, low}$	dB	1, 2, 3, 4, 5, 6	44	
$Thresh_{x, low}$	dB	1, 2, 3, 4, 5, 6	50	
Propagation Condition		1, 2, 4, 56	AWGN 1944 Note 4	
		3, 6	AWGN 3334 Note 5	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.
NOTE 5: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334 Hz.

Table 8.2.1.2.5-2: E-UTRA Cell specific test parameters for for E-UTRA - NR FR1 cell re-selection to lower priority NR target cell for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Cell 1	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [23] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc} Note 2	dBm/15 kHz	-99.9	
RSRP Note 3	dBm/15 KHz	-103.55	-84.45
$\hat{E}_s/I_{ot}$	dB	-3.65	15.45
$\hat{E}_s/N_{oc}$	dB	-3.65	15.45
$Treselection_{EUTRAN}$	S	0	
Snonintrasearch	dB	50	
$Thresh_{x, high}$	dB	48	
$Thresh_{serving, low}$	dB	44	
$Thresh_{x, low}$	dB	50	
Propagation Condition		AWGN	

Parameter	Unit	Cell 1	
		T1	T2
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 4: Void			

The cell reselection delay to a lower priority NR cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Registration procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, NR_HST} + T_{SI-NR,}$

Where:

$T_{evaluate, NR_HST}$ See Table 4.2.2.5.6-2 in clause 4.2.2.5.6 in TS 36.133 [23]

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 2.24 s, allow 3 s for the cell re-selection delay to a lower priority NR cell.

8.2.2 E-UTRA - NR Inter-RAT Early Measurement Reporting

8.2.2.0 Minimum conformance requirements

A UE supporting *ca-IdleModeMeasurements* shall perform the idle mode measurement on the inter-frequency CA candidate frequencies/cells indicated by higher layers and meet the requirement specified in this clause. A UE supporting *nr-IdleInactiveMeasFR1-r16* and/or *nr-IdleInactiveMeasFR2-r16* shall perform the idle mode measurement on the NR inter-RAT EN-DC candidate frequencies/cells indicated by higher layers and meet the requirement specified in this section.

Additionally, a UE supporting *ca-IdleModeMeasurements* or *nr-IdleInactiveMeasFR1-r16*/*nr-IdleInactiveMeasFR2-r16* shall perform the idle mode measurement on serving cell and meet the requirement specified in this section.

A UE only supporting *ca-IdleModeMeasurements* shall fulfil the requirements defined for a UE supporting *ca-IdleModeMeasurements* as defined in this section.

A UE only supporting *nr-IdleInactiveMeasFR1-r16*/*nr-IdleInactiveMeasFR2-r16* shall fulfil the requirements defined for a UE supporting *nr-IdleInactiveMeasFR1-r16*/*nr-IdleInactiveMeasFR2-r16* as defined in this section.

A UE supporting both *ca-IdleModeMeasurements* and *nr-IdleInactiveMeasFR1-r16*/*nr-IdleInactiveMeasFR2-r16* shall fulfil the requirements for a UE supporting *ca-IdleModeMeasurements* and *nr-IdleInactiveMeasFR1-r16*/*nr-IdleInactiveMeasFR2-r16* as defined in this section.

The requirements in clause 4.9 apply provided that the UE is provided with a valid timer T331 by dedicated RRC signalling and T331 is running.

For a UE which supports *ca-IdleModeMeasurements* the UE shall support the idle mode CA measurements on the serving cell, overlapping and non-overlapping carriers.

For inter-frequency idle mode measurements, an overlapping carrier is defined as a carrier configured by higher layer for early measurement reporting and inter-frequency mobility measurements. A non-overlapping carrier is defined as a carrier configured by higher layer for early measurement reporting while not configured for inter-frequency mobility measurements.

This clause defines the requirements for the detected cell status for the idle mode CA measurement when UE transitions from RRC Connected mode to Idle mode and after UE has entered Idle mode. The requirements are applicable to an E-UTRAN carrier aggregation or EN-DC capable UE which has been configured with one or more downlink SCells or NR PSCell and one or more downlink NR SCells during the Connected mode and which supports *ca-IdleModeMeasurements* or *nr-IdleInactiveMeasFR1-r16*/*nr-IdleInactiveMeasFR2-r16*. The requirements are applicable for E-UTRAN FDD and TDD SCell(s), and NR PSCell and SCells.

Upon releasing the connection and if the UE has been configured with idle mode CA measurement reporting, following requirements apply concerning the detected cells in Connected mode upon state transitioning to Idle mode and during Idle mode:

- A cell which is detected cell in Connected mode prior to connection release, shall remain detected after UE has entered Idle mode and during Idle mode, provided that the following conditions are met:
  - The UE has been provided with a list of cells and/or carrier frequencies for early measurement reporting by dedicated RRC signalling and
  - The detected cell is among the list of cells or on a carrier frequency provided for early measurement reporting, and
  - The UE is provided with a valid timer T331 by dedicated RRC signalling, and
  - For inter-frequency carrier, the detected cell remains detectable until UE reconnects to the network and transmits the early measurement report, or for NR inter-RAT carrier, the detected cell and SSBs of the detected cell remains detectable until UE reconnects to the network and transmits the early measurement report.
  - The carrier frequency of the detected cell and the carrier frequency of the serving cell are among the supported band combination of the UE.

An inter-frequency cell is considered detectable according to RSRP, RSRP Ês/Iot, SCH_RP and SCH Ês/Iot defined in Annex B.1.1 and Annex B.1.2 for a corresponding Band. An inter-RAT NR cell is considered detectable according to the conditions in B.1.3 of [50] for a corresponding band. An SSB of an inter-RAT NR cell is considered detectable according to SSB_RP and SSB Ês/Iot defined in Annex B.1.3 of [50] for a corresponding Band.

In the absence or expiration of T331, it is up to UE implementation to apply the requirements on the detected cell status in this subclause.

The UE shall measure the RSRP and RSRQ level of the serving cell and evaluate the cell selection criterion S defined in section 4.2.2.1 and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements of the serving cell to higher layers, with measurement accuracy as specified in clauses 9.1.2B.2 and 9.1.5B.2, respectively.

While T331 is running, the UE shall perform measurement on the configured NR inter-RAT carriers for idle mode measurement reporting.

In addition to the requirements defined in section 4.2.2.9 and 4.2.2.9a, a UE which supports *nr-IdleInactiveMeasFR1-r16 or nr-IdleInactiveMeasFR2-r16* shall be able to support idle mode DC measurements of.

- at least 8 inter-RAT NR carriers which are also configured for inter-RAT mobility measurements, and
- at least 2 inter-RAT NR carrier which are not configured for inter-RAT mobility measurements.

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 8 inter-RAT NR carriers for idle mode DC measurements comprising of carriers configured for inter-RAT mobility measurements and carriers not configured for inter-RAT mobility measurements.

For idle mode DC measurements on NR inter-RAT carriers, if Srxlev $\leq S_{nonIntraSearchP}$ and Squal $\leq S_{nonIntraSearchQ}$, the NR inter-RAT measurement requirements defined in clause 4.2.2.5.6 shall apply, where UE shall search for and measure inter-RAT layers configured for idle mode DC measurements in preparation for possible reporting. If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$, the UE shall search for NR inter-RAT layers configured for idle mode DC measurements at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2, where UE shall search for and measure NR inter-RAT layers configured for idle mode DC measurements in preparation for possible reporting.

For UE supporting *nr-IdleInactiveBeamMeasFR1-r16* and/or *nr-IdleInactiveBeamMeasFR2-r16*, if the UE is configured with *beamMeasConfigIdle-r16* on one or more carriers for idle mode DC measurement, the UE, on each carrier, shall be able to

- detect a newly detectable inter-RAT NR cell and perform RSRP/RSRQ measurement in preparation for reporting, and
- detect and acquire the SSB index for a newly detectable inter-RAT NR cell if *beamMeasConfigIdle-r16* is configured on this carrier and perform RSRP/RSRQ measurement in preparation for reporting,

within the requirements defined in clause 4.2.2.5.6 plus k*$T_{SSB_index,NR}$, where k is the number of carriers configured for idle mode DC measurement with *beamMeasConfigIdle-r16*, and $T_{SSB_index,NR}$ is the additional time period used to acquire the index of the SSB being measured as defined in Table 4.9.2.4-1.

Table 4.9.2.4-1: $T_{SSB_index,NR}$

DRX cycle length [s]	Scaling Factor (N1)		$T_{SSB_index,NR}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]	
0.32	1	8	N2 x 1.28 x 1.5 x N1 (N2 x 4 x 1.5 x N1)
0.64		5	N2 x 1.28 x N1 (N2 x 2 x N1)
1.28		4	N2 x 1.28 x N1 (N2 x 1 x N1)
2.56		3	N2 x 2.56 x N1 (N2 x 1 x N1)
NOTE 1: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, N1 = 8 for all DRX cycle length. NOTE 2: N2 = 3 if the NR inter-RAT carrier for idle mode DC measurement reporting is in FR1, and N2= 5 if the NR inter-RAT carrier for idle mode DC measurement reporting is in FR2.			

For UE supporting *nr-IdleInactiveBeamMeasFR1-r16* and/or *nr-IdleInactiveBeamMeasFR2-r16*, if the UE is configured with *beamMeasConfigIdle-r16* for idle mode DC measurement, the UE shall be capable of performing SS-RSRP, SS-RSRQ for at least

- 7 SSBs with different SSB index and/or PCI on an NR inter- RAT layer in FR1,
- 10 SSBs with different SSB index and/or PCI on an NR inter- RAT layer in FR2.

In the absence or expiration of T331, it is up to UE implementation to perform the idle mode DC measurement.

The UE shall be capable of performing SS-RSRP and SS-RSRQ measurements of the carriers for idle mode DC measurements, and the UE physical layer shall be capable of reporting SS-RSRP and SS-RSRQ measurements of the carriers for idle mode DC measurements to higher layers, with measurement accuracy as specified in sub-clauses 9.11.1A and 9.11.2A, respectively. The UE shall be able to report idle mode DC measurements when idle mode DC measurement reporting is requested by the network.

8.2.2.1 E-UTRA – NR FR1 Early Measurement Reporting

8.2.2.1.1 Test purpose

The purpose of this test is to verify the requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in TS 36.133 [23] clause 4.9.2.4 and verify to the accuracy requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in TS 36.133 [23] clause 9.11.1A and 9.11.2A.

8.2.2.1.2 Test applicability

This test applies to all types of E-UTRA UE from Release 16 onwards, capable of NR measurements and supporting eNB-configured SSB-based RRM measurements of NR FR1 carrier(s) in RRC_IDLE and in RRC_INACTIVE.

8.2.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.2.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.8.2.2.1.

8.2.2.1.4 Test description

8.2.2.1.4.1 Initial conditions

This test shall be tested under any of the test configuration in Table 8.2.2.1.4.1-1.

Table 8.2.2.1.4.1-1: Supported test configurations for E-UTRA - NR FR1 Inter-RAT Early Measurement Reporting

Test Case ID	Description
8.2.2.1-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.2.2.1-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.2.2.1-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8.2.2.1-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.2.2.1-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.2.2.1-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test requirement and the DUT according to the parameters in Table 8.2.2.1.4.1-2.

Table 8.2.2.1.4.1-2: Initial conditions for E-UTRA – NR FR1 Inter-RAT Early Measurement Reporting

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1. 6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.2.2.1.4.1-3.
2. Message contents are defined in clause 8.2.2.1.4.3.
3. The test scenario comprises of one NR cell and one E-UTRAN cell. E-UTRA Cell 1 is the PCell and Cell 2 is the neighbour cell. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clauses C.1.0 and C.1.1 and Cell 2 is configured according to clauses C.1.1 and C.1.2.

Table 8.2.1.1.4.1-3: General test parameters for E-UTRA – NR FR1 Inter-RAT Early Measurement Reporting

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1	
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 2	Cell 2 is of higher priority.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2	
DRX cycle length	s	1, 2, 3, 4, 5, 6	1.28	
Time offset between Cell 1 and Cell 2		1, 2, 3, 4, 5, 6	3 μs	
T1	s	1, 2, 3, 4, 5, 6	0.5	

T2	s	1, 2, 3, 4, 5, 6	71	
T3	s	1, 2, 3, 4, 5, 6	2	
T331	s	1, 2, 3, 4, 5, 6	300	

8.2.2.1.4.2 Test procedure

In this test there are two cells, E-UTRA PCell (Cell 1) and neighbour NR Cell (Cell 2). The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Prior to the start of the test the UE shall be connected to Cell 1. During T1, NR Cell 2 shall be powered off.

At the end of T1, the RRC connection to Cell 1 is released and UE is configured Idle mode DC measurement on the carrier frequency of Cell 2.

1. Ensure the UE is in State RRC_IDLE with generic procedure parameters Connectivity EUTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall set the parameters for T1 according to Table 8.8.2.2.1.5-1 and Table 8.8.2.2.1.5-2 as appropriate. T1 starts.

3. After T1 expires, the SS shall send the RRCConnectionRelease with configuration of Idle mode DC measurement on the carrier frequency of Cell 2.

4. The SS shall set the parameters for T2 according to Table 8.8.2.2.1.5-1 and Table 8.8.2.2.1.5-2 as appropriate. T2 starts.

5. During the time period T2 the UE is in Idle mode configured to perform inter-RAT idle mode CA/DC measurements on Cell 2. The UE shall not perform reselection.

6. After T2 expires, the SS shall set the parameters for T3 according to Table 8.8.2.2.1.5-1 and Table 8.8.2.2.1.5-2 as appropriate. T3 starts.

7. The SS transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity). During the connection setup the UE is reports idleMeasAvailable-r15 in the *RRCConnectionSetupComplete* message.

8. The SS shall send the *UEInformationRequest* message, requesting UE to report idle mode CA/DC measurements.

9. If UE responds with *UEInformationResponse* message containing the idle mode measurement results with SS-RSRP values within the limits in Table 8.2.2.1.5-3 for configuration 1, 2, 4 and 5 and Table 8.2.2.1.5-4 for configuration 3 and 6 and SS-RSRQ values within the limits in Table 8.2.2.1.5-5 for configuration 1, 2, 3, 4, 5 and 6 the number of passed iterations is increased by one. Otherwise, the number of failed iterations is increased by one.

10. If paging in step 7 succeeds, go to step 12, otherwise switch off the UE.

11. Switch on the UE and ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR with Connected without release On according to TS 38.508-1 [14] clause 4.5.

12. Repeat step 2-12 until a test verdict has been achieved.

8.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 8.2.2.1.4.3-2: *SystemInformationBlockType2*

Derivation Path: 36.508 Table 4.4.3.3-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType2 ::= SEQUENCE {			
idleModeMeasurementsNR-r16	true		
}			

Table 8.2.2.1.4.3-2: *RRCConnectionRelease*

Derivation Path: 36.508 Table 4.6.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionRelease ::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-TransactionIdentifier-DL		
criticalExtensions CHOICE {			
nonCriticalExtension SEQUENCE {			
measIdleConfig-r15 SEQUENCE {			
measIdleCarrierListNR-r16 ::= SEQUENCE {			
carrierFreqNR-r16	ARFCN of Cell2		
subcarrierSpacingSSB-r16	kHz15	8.2.2.1-1 8.2.2.1-2 8.2.2.1-4 8.2.2.1-5	
subcarrierSpacingSSB-r16	kHz30	8.2.2.1-3 8.2.2.1-6	
reportQuantitiesNR-r16	both		
}			
}			
}			
}			
}			

Table 8.2.2.1.4.3-2: *RRCConnectionSetupComplete*

Derivation Path: 36.508 Table 4.6.1-18			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionSetupComplete ::= SEQUENCE {			
criticalExtensions CHOICE {			
nonCriticalExtension SEQUENCE {			
idleMeasAvailable-r15	true		
}			
}			
}			

Table 8.2.2.1.4.3-3: *UEInformationRequest*

Derivation Path: 36.508 Table 4.6.1-23A			
Information Element	**Value/remark**	**Comment**	**Condition**
UEInformationRequest-r9 ::= SEQUENCE {			
criticalExtensions CHOICE {			
nonCriticalExtension SEQUENCE {			
idleModeMeasurementReq-r15			
}			
}			
}			

Table 4.6.1-23B: *UEInformationResponse*

Derivation Path: 36.331 clause 6.2.2			
Information Element	**Value/remark**	**Comment**	**Condition**
UEInformationResponse-r9 ::= SEQUENCE {			
criticalExtensions CHOICE {			
nonCriticalExtension SEQUENCE {			
measResultListIdleNR-r16 SEQUENCE {			
carrierFreqNR-r16	ARFCN of Cell2		
measResultsPerCellListIdleNR-r16 SEQUENCE {			
physCellIdNR-r16	Cell ID of Cell2		
rsrpResultNR-r16	INTEGER (0..127)		

rsrqResultNR-r16	INTEGER (0..127)		
}			
}			
}			
}			
}			

8.2.2.1.5 Test requirement

Tables 8.2.2.1.5-1 and 8.2.2.1.5-2 define the primary level settings including test tolerances for and tables 8.2.2.1.5-3, 8.2.2.1.5-4, 8.2.2.1.5-5 and 8.2.2.1.5-6 define accuracy requirements E-UTRA - NR FR1 Early Measurement Reporting test case.

Table 8.2.2.1.5-1: Cell specific test parameters for NR cell 2 for E-UTRA – NR FR1 Inter-RAT Early Measurement Reporting

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 4	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH Reference measurement channel		1, 4	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1, 4	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
RMC CORESET Reference Channel		1, 4	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		
SMTC configuration		1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
Pcompensation	dB	1, 2, 3, 4, 5, 6	0		
Qhysts	dB	1, 2, 3, 4, 5, 6	0		
Qoffsets, n	dB	1, 2, 3, 4, 5, 6	0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6	SS-RSRP		
$\hat{E}_s/I_{ot}$	dB	1, 4	-infinity	-4	4
		2, 5			
		3, 6			
N_{oc} Note2	dBm/SCS	1, 4	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc} Note2	dBm/15 kHz	1, 4	-98		
		2, 5			
		3, 6			
$\hat{E}_s/N_{oc}$	dB	1, 4	-infinity	-3.7	-3.7

		2, 5			
		3, 6			
SS-RSRP Note3	dBm/SCS	1, 4	-infinity	-101.7	-101.7
		2, 5	-infinity	-101.7	-101.7
		3, 6	-infinity	-98.7	-98.7
SS-RSRQ Note3	dB	1, 4	-infinity	-16.03	-16.03
		2, 5	-infinity	-16.03	-16.03
		3, 6	-infinity	-16.03	-16.03
Io	dBm/9.36 MHz	1, 4	-70.05	-68. 51	-68. 51
	dBm/9.36 MHz	2, 5	-70.05	-68. 51	-68. 51
	dBm/38.16 MHz	3, 6	-63.94	-62.40	-62.40
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.2.2.1.5-2: Cell specific test parameters for E-UTRA cell 1 for E-UTRA – NR FR1 Inter-RAT Early Measurement Reporting

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc} Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 KHz	-84	-84	-84
RSRQ Note 3	dB	-10.96	-10.96	-10.96
$\hat{E}_s/I_{ot}$	dB	14	14	14
$\hat{E}_s/N_{oc}$	dB	14	14	14
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	50		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$	dB	50		
beamMeasConfigIdle		True		
Propagation Condition		AWGN		

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.2.2.1.5-3: Absolute accuracy requirements for the Cell 2 SS-RSRP reported values for test configurations 1 and 2

Normal Conditions	T3
Lowest reported value (Cell 2)	44
Highest reported value (Cell 2)	66

Table 8.2.2.1.5-4: Absolute accuracy requirements for the Cell 2 SS-RSRP reported values for test configurations 3

Normal Conditions	T3
Lowest reported value (Cell 2)	47
Highest reported value (Cell 2)	69

Table 8.2.2.1.5-5: Absolute accuracy requirements for the Cell 2 SS-RSRQ reported values for test configurations 1, 2 and 3

Normal Conditions	T3
Lowest reported value (Cell 2)	44
Highest reported value (Cell 2)	65

At the beginning of the time-period T2 the connection is released, and UE enters idle mode. During the time period T2 the UE is in Idle mode and Cell 2 is active. The UE shall not perform reselection. The UE shall perform Idle Mode DC measurement according to clause 4.9.2.4 in TS 36.133 [23]. UE shall be able to detect, acquire the SSB index and measure the SS-RSRP and SS-RSRQ from Cell 2 for Idle mode DC measurement during T2.

At the start of T3 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report. The UE shall send early measurement report to the PCell.

After receiving the requested early measurement report, the test equipment verifies the accuracy of measurement reported for serving Cell 1 and Cell 2 meets the requirements in Section 9.1.2B in TS 36.133 [23] and Section 9.1.3B, respectively and test ends.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

8.2.2.2 E-UTRA – NR FR2 Early Measurement Reporting

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions
- E-UTRA - FR2 OTA testability is still FFS.

8.2.2.2.1 Test purpose

The purpose of this test is to verify the requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in TS 36.133 [23] clause 4.9.2.4 and verify to the accuracy requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in TS 36.133 [23] clause 9.11.1A and 9.11.2A.

8.2.2.2.2 Test applicability

This test applies to all types of NR UE from Release 16 onwards, capable of NR measurements and supporting eNB-configured SSB-based RRM measurements of NR FR2 carrier(s) in RRC_IDLE and in RRC_INACTIVE.

8.2.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.2.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.8.2.2.2.

8.2.2.2.4 Test description

8.2.2.2.4.1 Initial conditions

This test shall be tested under any of the test configuration in Table 8.2.2.2.4.1-1.

Table 8.2.2.2.4.1-1: Supported test configurations for E-UTRA - NR FR2 Inter-RAT Early Measurement Reporting

Test ID	Description
8.2.2.2-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
8.2.2.2-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test requirement and the DUT according to the parameters in Table 8.2.2.2.4.1-2.

Table 8.2.2.2.4.1-2: Initial conditions for E-UTRA - NR FR2 Inter-RAT Early Measurement Reporting

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.2.2.2.4.1-3.
2. Message contents are defined in clause 8.2.2.2.4.3.
3. The test scenario comprises of one NR cell and one E-UTRAN cell. E-UTRA Cell 1 is the PCell and Cell 2 is the neighbour cell. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clauses C.1.0 and C.1.1 and Cell 2 is configured according to clauses C.1.1 and C.1.2.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx Beam Peak Search procedures as described in Annex I. Ensure that the UE is receiving NR Cell 2 from the Rx Beam Peak direction.

Table 8.2.2.2.4.1-3: General test parameters for E-UTRA – NR FR2 Inter-RAT Early Measurement Reporting

Parameter	Unit	Test	Value	Comment

		configuration		
Active cell		1, 2	E-UTRAN Cell 1	E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR Cell 2	
E-UTRA RF Channel Number		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1	One FR2 NR carrier frequency is used.
DRX cycle length	s	1, 2	1.28	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	
T1	s	1, 2	0.5	
T2	s	1, 2	128	
T3	s	1, 2	2	
T331	s	1, 2	300	

8.2.2.2.4.2 Test procedure

Same test procedure as in 8.2.2.1.4.2.

8.2.2.2.4.3 Message contents

Same message content as in 8.2.2.1.4.3.

8.2.2.2.5 Test requirement

Table8.2.2.2.5-1 define the primary level settings including test tolerances and tables 8.2.2.2.5-2, 8.2.2.2.5-3 define accuracy requirements for E-UTRA - NR FR2 Early Measurement Reporting test case.

Table 8.2.2.2.5-1: Cell specific test parameters for NR cell 2 for E-UTRA – NR FR2 Inter-RAT Early Measurement Reporting

Parameter	**Unit**	**Test configuration**	**Cell 2**		
			T1	**T2**	**T3**
TDD configuration		1, 2	TDDConf.3.1		
PDSCH Reference measurement channel		1, 2	SR.3.1 TDD		
RMSI CORESET Reference Channel		1, 2	CR.3.1 TDD		
RMC CORESET Reference Channel		1, 2	CCR.3.1 TDD		
OCNG Patterns		1, 2	OP.1		
BWchannel	MHz	1, 2	100		
Data RBs allocated		1, 2	66		
SMTC configuration		1, 2	SMTC.1		
SSB configuration		1, 2	SSB.1 FR2		
Initial DL BWP configuration		1, 2	DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1		
RLM-RS			SSB		
Qrxlevmin			-140		
Pcompensation			0		
Qhysts			0		
Qoffsets, n			0		
Cell_selection_and_reselection_quality_measurement			SS-RSRP		
AoA setup			Setup 1 defined in A.9.1		
Beam assumption[Note 4]			Rough		
$\hat{E}_s / I_{ot}$ UE baseband	dB	1, 4	-infinity	-3.66	-3.66

N_{oc} Note2	dBm/SCS	1, 4	-98		
N_{oc} Note2	dBm/15kHz	1, 2	-107		
$\hat{E}_s / N_{oc}$	dB	1, 4	-infinity	-2.4	-2.4
SSbRP Note3	dBm/SCS	1, 4	-infinity	-100.4	-100.4
SS-RSRQ Note3	dB	1, 4	-infinity	-16.01	-16.01
Io	dBm/95.04MHz	1, 4	-68.98	-67.01	-67.01
Propagation Condition		1, 2	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP, SS-RSRQ levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/IotBB includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBP from TS 38.101-2 [19] Table 6.2.1.3-4.

Table 8.2.2.2.5-2: Cell specific test parameters for E-UTRA cell 1 for E-UTRA – NR FR2 Inter-RAT Early Measurement Reporting

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc} Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 KHz	-84	-84	-84
RSRQ Note 3	dB	-10.96	-10.96	-10.96
$\hat{E}_s / I_{ot}$	dB	14	14	14
$\hat{E}_s / N_{oc}$	dB	14	14	14
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	N/A		
$Thresh_{x, highP}$	dB	51		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$	dB	50		
beamMeasConfigIdle		False		
Propagation Condition		AWGN		

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.2.2.2.5-3: Absolute accuracy requirements for the Cell 2 SS-RSRP reported values

Normal Conditions	T3
Lowest reported value (Cell 2)	28
Highest reported value (Cell 2)	86

Table 8.2.2.2.5-4: Absolute accuracy requirements for the Cell 2 SS-RSRQ reported values

Normal Conditions	T3
Lowest reported value (Cell 2)	44
Highest reported value (Cell 2)	65

At the beginning of the time-period T2 the connection is released, and UE enters idle mode. During the time period T2 the UE is in Idle mode and Cell 2 is active. The UE shall not perform reselection. The UE shall perform Idle Mode DC measurement according to clause 4.9.2.4 in TS 36.133 [23]. UE shall be able to detect, acqure the SSB index and measure the SS-RSRP and SS-RSRQ from Cell 2 for Idle mode DC measurement during T2.

At the start of T3 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report. The UE shall send early measurement report to the PCell.

After receiving the requested early measurement report, the test equipment verifies the accuracy of measurement reported for serving Cell 1 and Cell 2 meets the requirements in Section 9.1.2B in TS 36.133 [23] and Section 9.1.3B, respectively and test ends.

The rate of correct events observed during repeated tests shall be at least 90% with confidence level of 95%.

8.3 RRC_CONNECTED state mobility

8.3.1 Inter-RAT cell handover

8.3.1.0 Minimum conformance requirements

8.3.1.0.1 Minimum conformance requirements for E-UTRA - NR FR1 handover

[TS 36.133, clause 5.3.4.2]

When the UE receives a RRC message implying inter-RAT handover to the UE shall be ready to start the transmission of the uplink PRACH channel in NR within $D_{handover}$ seconds from the end of the last TTI containing the RRC command. $D_{handover}$ is defined as:

$$D_{handover} = T_{RRC_procedure_delay} + T_{interruption}$$

Where:

$T_{RRC_procedure_delay}$: it is the RRC procedure delay which is [50] ms.

$T_{interruption}$: it is the time between end of the last TTI containing the RRC command on the PDSCH in E-UTRAN and the time the UE starts transmission of the PRACH in NR, excluding $T_{RRC_procedure_delay}$. $T_{interruption}$ is defined in TS 36.133 clause 5.3.4.3.

[TS 36.133, clause 5.3.4.3]

When inter-RAT handover to NR is commanded, the interruption time shall be less than $T_{interruption}$

$$T_{interruption} = T_{search} + T_{IU} + T_{rs}+20 \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknowncell and target cell Es/Iot ≥ [-2] dB, then $T_{search} = 3 \cdot T_{rs} + 2$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

T_{rs} is the SMTC period of the target NR cell if the UE has been provided with an SMTC configuration for the target cell prior to, or in the handover command, otherwise T_{rs} is the target cell SSB transmission period, if such is provided. If the UE is not provided with an SMTC configuration or SSB transmission period, the requirement in this clause is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If UE is provided with both SMTC configuration and SSB transmission period the requirement shall be based on SMTC periodicity.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in clauses 8.1.2.4.21 and 8.1.2.4.22.

The normative reference for this requirement is TS 38.133 [6] clause 5.3.4.2 and 5.3.4.3.

8.3.1.1 E-UTRA - NR FR1 handover with known target cell

8.3.1.1.1 Test purpose

The purpose of this test is to verify the E-UTRAN to NR FR1 handover requirements as specified in TS 36.133 [23] clause 5.3.4.

8.3.1.1.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards and capable of NR measurements.

8.3.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.3.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.8.3.1.1.

8.3.1.1.4 Test description

The test comprises of one E-UTRA carrier and one NR carrier. There are two cells and one cell on each carrier. Cell 1 is the E-UTRAN PCell and Cell 2 is an inter-RAT NR neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 8.1.2.1-1 of TS 36.133 [23] is configured before T2 begins to enable inter-RAT frequency monitoring.

8.3.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.3.1.1.4.1-1.

Table 8.3.1.1.4.1-1: Supported test configurations for E-UTRA - NR FR1 handover with known target cell

Configuration	Description
8.3.1.1-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.3.1.1-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.3.1.1-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8.3.1.1-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.3.1.1-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.3.1.1-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.3.1.1.4.1-2.

Table 8.3.1.1.4.1-2: Initial conditions for E-UTRA - NR FR1 handover with known target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.3.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.3.1.1.4.1-3.
2. Message contents are defined in clause 8.3.1.1.4.3.
3. There are two carriers and two cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

Table 8.3.1.1.4.1-3: General test parameters for E-UTRA - NR FR1 handover with known target cell

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	E-UTRAN cell
	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	-83	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2NR		dBm	As specified in Table 8.3.1.1.5-2	Absolute NR SS-RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in Table 8.1.2.1-1 started before T2 starts [23]
T1		s	5	
T2		s	≤5	
T3		s	1	

8.3.1.1.4.2 Test procedure

The test comprises of one E-UTRA carrier and one NR carrier. There are two cells and one cell on each carrier. Cell 1 is the E-UTRAN and Cell 2 is an inter-RAT NR neighbour cell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 8.3.1.1.4.1-3, 8.3.1.1.5-1 and 8.3.1.1.5-2, respectively.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 8.1.2.1-1 of TS 36.133 [23] is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters of Cell 1 and Cell 2 according to T1 in Table 8.3.1.1.5-1 and Table 8.3.1.1.5-2 respectively, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the parameters setting from T1 to T2 as specified in Table 8.3.1.1.5-1 and Table 8.3.1.1.5-2 respectively. T2 Starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event B2.
7. SS shall transmit a *MobilityFromEUTRACommand* message implying handover to Cell 2.
8. The start of T3 is the instant when the last TTI containing the *MobilityFromEUTRACommand* message implying handover is sent to the UE, at that instant the SS shall switch the power setting from T2 to T3 as specified in Table 8.3.1.1.5-1 and Table 8.3.1.1.5-2.
9. If the UE transmits the uplink PRACH channel to Cell 2 less than 112 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
10. The UE shall transmit an *RRCReconfigurationComplete* message on Cell 2.
11. After T3 expires,
    - The SS could switch the parameters setting from T3 to T1 as specified in Table 8.3.1.1.5-1 and Table 8.3.1.1.5-2 respectively.
    - If the UE handover back to E-UTRA Cell 1, then T1 starts, skip to step 3. Otherwise, switch off and on the UE. Then ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3. E-UTRA Cell 1 is the active cell.
    - Or, switch off and on the UE Then ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3. E-UTRA Cell 1 is the active cell.
12. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
13. Repeat step 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved

8.3.1.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.3.1.1.4.3-1: Common Exception messages for E-UTRA - NR FR1 handover with known target cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.3-2; Table H.3.4-1a Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 and gapUE Table H.3.4-5 with Condition Pattern #0
Specific message contents exceptions for Test Configuration 8.3.1.1-1, 8.3.1.1-2, 8.3.1.1-4 and 8.3.1.1-5	Table H.3.4-6 with Condition SSB.1 FR1, SMTC.1 and Asynchronous cells
Specific message contents exceptions for Test Configuration 8.3.1.1-3 and 8.3.1.1-6	Table H.3.4-6 with Condition SSB.2 FR1, SMTC.1 and Asynchronous cells

8.3.1.1.5 Test requirement

Table 8.3.1.1.4.1-3, 8.3.1.1.5-1 and 8.3.1.1.5-2 define the primary level settings including test tolerances for E-UTRA - NR FR1 handover with known target cell.

Table 8.3.1.1.5-1: E-UTRAN PCell specific test parameters for E-UTRA - NR FR1 handover with known target cell

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration[Note1]		4, 5, 6	6		
TDD uplink-downlink configuration[Note1]		4, 5, 6	1		
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1, 2, 3	4		
		4, 5, 6	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
PDSCH_RA					
PDSCH_RB					
OCNG_RA Note4					
OCNG_RB Note4					
N_{oc} Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	7	5.45	5.45
$\hat{E}_s/I_{ot}$ Note6	dB	1, 2, 3, 4, 5, 6	7	5.45	5.45
RSRP Note6	dBm/15kHz	1, 2, 3, 4, 5, 6	-91	-92.55	-92.55
SCH_RP Note6	dBm/15kHz	1, 2, 3, 4, 5, 6	-91	-92.55	-92.55
Io Note6	dBm/9MHz	1, 2, 3, 4, 5, 6	-62.43	-63.68	-63.68
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix Note7		1, 2, 3, 4, 5, 6	1x2 Low		

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
NOTE 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
NOTE 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
NOTE 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 8.3.1.1.5-2: NR neighbour cell specific test parameters for E-UTRA - NR FR1 handover with known target cell

Parameter		Unit	Configuration	Cell 2		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6	1		
Duplex mode			1, 4	FDD		
			2, 3, 5, 6	TDD		
TDD Configuration			2, 5	TDDConf.1.1		
			3, 6	TDDConf.2.1		
$BW_{channel}$		MHz	1, 4	10: $N_{RB,c}$ = 52 (FDD)		
			2, 5	10: $N_{RB,c}$ = 52 (TDD)		
			3, 6	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
OCNG pattern Note1			1, 2, 3, 4, 5, 6	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		
b2-Threshold2NR		dBm	1, 2, 4, 5	-106		
			3, 6	-103		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						

EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6	-98		
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5	-98		
		3, 6	-95		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-infinity	1.55	1.55
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6	-infinity	1.55	1.55
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5	-infinity	-96.45	-96.45
		3, 6	-infinity	-93.44	-93.44
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5	-70.05	-66.19	-66.19
	dBm/38.16 MHz	3, 6	-63.94	-60.09	-60.09
Propagation condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low		
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
NOTE 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

The UE shall start to transmit the PRACH to Cell 2 less than 112 ms from the beginning of time period T3.

The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

- RRC procedure delay = 50 ms and is specified in TS 36.133 [23].
- $T_{interrupt}$ = 62 ms in the test; $T_{interrupt}$ is defined in TS 36.133 [23] clause 5.3.4.3.

This gives a total of 112 ms.

The rate of correct handovers observed during repeated tests shall be at least 90%.

8.4 Measurement procedures

8.4.1 SFTD measurement delay

8.4.1.0 Minimum conformance requirements

8.4.1.0.1 Minimum conformance requirements for E-UTRA - NR FR1 SFTD measurement delay

[TS 36.133, clause 8.1.2.4.25.1]

The UE shall perform inter-RAT SFTD measurement and report SFTD result with/without SS-RSRP after the network requests with *reportSFTD-Meas* set to *neighborCells*. The overall delay includes RRC procedure delay to be defined in clause 11.2 in TS 36.331 and SFTD measurement reporting delay in TS 36.133 clause 8.1.2.4.25.3.

[TS 36.133, clause 8.1.2.4.25.2]

The requirements on SFTD measurement delay defined in this clause are applicable under the side condition SCH $\hat{E}s/Iot \geq$ -3 dB for the NR cell. Depending on configuration, the SFTD measurement may be carried out with or without the support of configured measurement gaps. In the current release, indication on whether to carry out the SFTD measurement with or without measurement gaps is implicit and depending on whether measurement gaps are configured.

The UE shall be able to detect, identify and measure SFTD of up to 3 of the strongest NR cells on the carrier frequency provided in the SFTD measurement configuration. Further depending on the SFTD measurement configuration, the UE shall additionally report SS-RSRP for the one or more NR cells. The UE may or may not be configured with

cellsForWhichToReportSFTD. The UE does not expect *cellsForWhichToReportSFTD* to change during an ongoing SFTD measurement.

When no measurement gaps are provided, the UE shall be capable of finding the NR cell regardless of its SSB position in the SMTC period. The SFTD measurement shall be conducted with sustained connection to the E-UTRA PCell and activated SCell(s), however, the UE may be allowed to cause a certain amount of interruptions for reconfiguration of the radio receiver, as specified in TS 36.133 clause 7.35.

When measurement gaps are provided, the UE shall be capable of finding the NR cell under the additional condition that the SSB at least occasionally falls within the measurement gap.

When no MCG DRX is used, the UE shall be capable of determining SFTD within a physical layer measurement period of $T_{measure_SFTD1}$ as follows:

- For SFTD measurements without measurement gaps, and without additional SS-RSRP reporting:
  - For NR carrier in FR1: $T_{measure_SFTD1}$ = [14] SMTC periods
- For SFTD measurements in measurement gaps, and without additional SS-RSRP reporting:
  - For NR carrier in FR1: $T_{measure_SFTD1} = [N_{freq} \times 8 \times \max(MGRP, SMTC\ period)]$
- For SFTD measurements without measurement gaps, and with additional SS-RSRP reporting:
  - For NR carrier in FR1: $T_{measure_SFTD1}$ = [19] SMTC periods
- For SFTD measurements in measurement gaps, and with additional SS-RSRP reporting:
  - For NR carrier in FR1: $T_{measure_SFTD1} = [N_{freq} \times 13 \times \max(MGRP, SMTC\ period)]$

Where N_{freq} is the number of carriers monitored in measurement gaps.

When MCG DRX is used, the same $T_{measure_SFTD1}$ as for non-DRX applies, but the reporting delay depends on the DRX cycle length in use.

In case an NR PSCell is added, the UE shall terminate the inter-RAT SFTD measurement.

In case PCell is changed due to handover, the UE shall terminate the inter-RAT SFTD measurement.

[TS 36.133, clause 8.1.2.4.25.3]

The SFTD measurement reporting delay is defined as the time between a command that will trigger an SFTD measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report. When the UE is configured to perform SRS carrier-based switching, an additional delay can be expected.

The SFTD measurement reporting delay shall be less than $T_{measure_SFTD1}$ defined in TS 36.133, clause 8.1.2.4.25.2.

8.4.1.1 E-UTRA - NR FR1 SFTD measurement delay in non-DRX

8.4.1.1.1 Test purpose

The purpose of this test is to partly verify that measurement reporting delay for SFTD between E-UTRA PCell and inter-RAT NR neighbour cell in FR1 is within the requirements stated in clauses 8.1.2.4.25 and 8.1.2.4.26 of TS 36.133 [23] for E-UTRA FDD and TDD, respectively, when no measurement gaps are provided and no DRX is configured.

8.4.1.1.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards and capable of inter-RAT SFTD measurements.

8.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.1.1.

8.4.1.1.4 Test description

Two carriers are used in this test: one E-UTRA carrier with the PCell (Cell 1), and one NR carrier with the NR neighbour cell (Cell 2).

This test consists of a single time period of duration T1. Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The point in time at which the UE receives, at the UE antenna connector(s), a RRC message containing a measurement configuration for SFTD measurements on RF channel 1 defines the start of time duration T1. Following the start of T1 the UE shall detect Cell 2, determine the SFN and frame time difference of Cell 2 relative to Cell 1, and send a measurement report. No measurement gaps are provided and no DRX is configured in this test.

8.4.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.1.1.4.1-1.

Table 8.4.1.1.4.1-1: Supported test configurations for E-UTRA - NR FR1 SFTD measurement delay in non-DRX

Config	Description
8.4.1.1-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.1.1-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.1.1-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8.4.1.1-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.1.1-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.1.1-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.4.1.1.4.1-2.

Table 8.4.1.1.4.1-2: Initial conditions for E-UTRA - NR FR1 SFTD measurement delay in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.4.1.1.4.1-3.
2. Message contents are defined in clause 8.4.1.1.4.3.
3. There are two carriers and two cells specified in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. Cell 1 is the cell used for connection setup for this test. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clauses C.1.0 and C.1.1.

Table 8.4.1.1.4.1-3: General test parameters for E-UTRA - NR FR1 SFTD measurement delay in non-DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1		One NR FR1 carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	Cell 1		Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	Cell 2		Cell 2 is on NR RF channel number 1.
SSB configuration		Config 1,4	SSB.1 FR1		As specified in TS 38.133 [6] clause A.3.10.1
		Config 2,5	SSB.1 FR1		As specified in TS 38.133 [6] clause A.3.10.1
		Config 3,6	SSB.2 FR1		As specified in TS 38.133 [6] clause A.3.10.1
CP length		Config 1,2,3,4,5,6	Normal		Applicable to both cells.
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Frame time offset between serving and neighbour cells	ms	Config 1,2,4,5	3	7	Asynchronous cells. The timing of Cell 2 relative to the timing of Cell 1.
	µs	Config 3,6	3		Synchronous cells.
SFN offset between serving and neighbour cells		Config 1,2,3,4,5,6	0	1	SFN of Cell 2 relative to SFN of Cell 1.
T1	s	Config 1,2,3,4,5,6	1		

8.4.1.1.4.2 Test procedure

Two cells are deployed in the test, which are E-UTRA PCell (Cell 1) on the E-UTRA carrier and a FR1 NR neighbour cell (Cell 2) on NR carrier. The general test parameters are given in Table 8.4.1.1.4.1-3. The test has two subtests with different frame time offset and SFN offset. Cell specific test parameters for the E-UTRA PCell and neighbour cell are given in Table 8.4.1.1.5-1 and 8.4.1.1.5-2, respectively.

In the measurement control information, it is indicated to the UE that inter-RAT SFTD measurement on Cell 2 is used. This test consists of single time period with time duration of T1. Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only.

Configure the frame time offset and SFN offset according to Test 1 in Table 8.4.1.1.4.1-3.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters of Cell 2 according to T1 in Table 8.4.1.1.5-2, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. UE shall transmit a *MeasurementReport* message triggered by SFTD measurement reporting. If the overall delays measured from the beginning of time period T1 is less than 297 ms then the number of successful tests is increased by one. If the UE fails to report within the overall delays measured requirement then the number of failure tests is increased by one.
6. After the SS receive the *MeasurementReport* message in step 6) or when T1 expires, the SS shall transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
7. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

8. After the RRC connection release, the SS:

   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or

   - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

10 Set the frame time offset and SFN offset for Test 2 according to Table 8.4.1.1.4.1-3 and repeat steps 1 to 9.

8.4.1.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.4.1.1.4.3-1: Common Exception messages for E-UTRA - NR FR1 SFTD measurement delay in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and SFTD; Table H.3.4-4 with Condition INTER-RAT NR, SFTD and GAPLESS
Specific message contents exceptions for Test Configuration 8.4.1.1-1 8.4.1.1-2, 8.4.1.1-4 and 8.4.1.1-5	Table H.3.4-6 with Condition SSB.1 FR1 andSMTC.1
Specific message contents exceptions for Test Configuration 8.4.1.1-3 and 8.4.1.1-6	Table H.3.4-6 with Condition SSB.2 FR1 andSMTC.1

8.4.1.1.5 Test requirement

Table 8.4.1.1.4.1-3, 8.4.1.1.5-1 and 8.4.1.1.5-2 define the primary level settings including test tolerances for E-UTRA - NR FR1 SFTD measurement delay in non-DRX.

Table 8.4.1.1.5-1: E-UTRA Cell specific test parameters for E-UTRA - NR FR1 SFTD measurement delay in non-DRX

Parameter	Unit	E-UTRAN Cell1
E-UTRA RF Channel Number		1
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0

PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA Note3	dB	
OCNG_RB Note3	dB	
N_{oc} Note4	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	17
$\hat{E}_s/I_{ot}$	dB	17
RSRP Note5	dBm/15 kHz	-87
SCH_RP Note5	dBm/15 kHz	-87
Io Note5	dBm/Ch BW	-59.13+10log($N_{RB,c}$ /50)
Propagation Condition		AWGN
Antenna Configuration		1x2

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
NOTE 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 5: E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.4.1.1.5-2: NR Cell specific test parameters for E-UTRA - NR FR1 SFTD measurement delay in non-DRX

Parameter	Unit	Test configuration	Cell 2
NR RF Channel Number		Config 1,2,3,4,5,6	1
Duplex mode		Config 1,4	FDD
		Config 2,3,5,6	TDD
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52
		Config 2,5	10: $N_{RB,c}$ = 52
		Config 3,6	40: $N_{RB,c}$ = 106
TDD configuration		Config 2,5	TDDConf.1.1
		Config 3,6	TDDConf.2.1
OCNG Pattern defined in A.3.2.1.1		Config 1,2,3,4,5,6	OP.1
SMTC configuration		Config 1,2,3,4,5,6	SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15
		Config 3,6	30
EPRE ratio of PSS to SSS	dB	Config 1,2,3,4,5,6	0
EPRE ratio of PBCH DMRS to SSS	dB		
EPRE ratio of PBCH to PBCH DMRS	dB		
EPRE ratio of OCNG DMRS to SSS Note 1	dB		
EPRE ratio of OCNG to OCNG DMRS Note 1	dB		
N_{oc} Note2	dBm/15kHz		-98
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98
		Config 3,6	-95
SS-RSRP Note 3, 4	dBm/SCS	Config 1,2,4,5	-94
		Config 3,6	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6	4
Io Note 3	dBm/9.36MHz	Config 1,2,4,5	-64.59
	dBm/38.16MHz	Config 3,6	-58.49

Propagation Condition		Config 1,2,3,4,5,6	AWGN
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			

The overall delays measured is defined as the time from the beginning of time period T1, to the moment the UE send one SFTD measurement triggered measurement report.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

- Overall delays measured = measurement reporting delay + TTI insertion uncertainty
- Measurement reporting delay = $T_{RRC_procedure_delay} + T_{measure_SFTD1}$

  $T_{RRC_procedure_delay}$ = 15 ms, is the RRC procedure delay for RRC reconfiguration, which is defined in TS 36.331 [2] Clause 11.2

  $T_{measure_SFTD1}$ = 280 ms, is the SFTD measurement report delay defined in TS 36.133 [23] clause 8.1.2.4.25 and 8.1.2.4.26 for FDD and TDD E-UTRA Cell 1, respectively.
- TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 297 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.4.1.2 E-UTRA - NR FR1 SFTD measurement delay in DRX

8.4.1.2.1 Test purpose

The purpose of this test is:

- To partly verify that measurement reporting delay for SFTD between E-UTRA PCell and inter-RAT NR neighbour cell in FR1 is within the requirements stated in clauses 8.1.2.4.25 and 8.1.2.4.26 of TS 36.133 [23] for E-UTRA FDD and TDD, respectively, when no measurement gaps are provided and DRX is configured.

8.4.1.2.2 Test applicability

This test applies to all types of E-UTRA UE Release 15 and forward supporting inter-RAT SFTD measurements and long DRX cycle.

8.4.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.1.2.

8.4.1.2.4 Test description

Two carriers are used in this test: one E-UTRA carrier with the PCell (Cell 1), and one NR carrier with the NR neighbour cell (Cell 2).

This test consists of a single time period of duration T1. Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The point in time at which the UE receives, at the UE antenna connector(s), a RRC message containing a measurement configuration for SFTD measurements on RF channel 1 defines the start of time duration T1. Following the start of T1 the UE shall detect Cell 2, determine the SFN and frame time difference of Cell 2 relative to Cell 1, and send a measurement report. No measurement gaps are provided and DRX is configured in this test.

8.4.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.1.2.4.1-1.

Table 8.4.1.2.4.1-1: Supported test configurations for E-UTRA - NR FR1 SFTD measurement delay in DRX

Config	Description
8.4.1.2-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.1.2-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.1.2-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8.4.1.2-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.1.2-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.1.2-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.4.1.2.4.1-2.

Table 8.4.1.2.4.1-2: Initial conditions for E-UTRA - NR FR1 SFTD measurement delay in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.4.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.4.1.2.4.1-3.
2. Message contents are defined in clause 8.4.1.2.4.3.
3. There are two carriers and two cells specified in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. Cell 1 is the cell used for connection setup for this test. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clauses C.1.0 and C.1.1.

Table 8.4.1.2.4.1-3: General test parameters for E-UTRA - NR FR1 SFTD measurement delay in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1		One NR FR1 carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	Cell 1		Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	Cell 2		Cell 2 is on NR RF channel number 1.
SSB Configuration		Config 1,4	SSB.1 FR1		As specified in TS 38.133 [6] clause A.3.10.1
		Config 2,5	SSB.1 FR1		As specified in TS 38.133 [6] clause A.3.10.1

		Config 3,6	SSB.2 FR1		As specified in TS 38.133 [6] clause A.3.10.1
CP length		Config 1,2,3,4,5,6	Normal		Applicable to both cells.
DRX		Config 1,2,3,4,5,6	DRX.4		DRX configuration as specified in TS 38.133 [6] clause A.3.3.4
Frame time offset between serving and neighbour cells	ms	Config 1,2,4,5	3	7	Asynchronous cells. The timing of Cell 2 relative to the timing of Cell 1.
	µs	Config 3,6	3		Synchronous cells.
SFN offset between serving and neighbour cells		Config 1,2,3,4,5,6	0	1	SFN of Cell 2 relative to SFN of Cell 1.
T1	s	Config 1,2,3,4,5,6	1		

8.4.1.2.4.2 Test procedure

Two cells are deployed in the test, which are E-UTRA PCell (Cell 1) on the E-UTRA carrier and a FR1 NR neighbour cell (Cell 2) on NR carrier. The general test parameters are given in Table 8.4.1.2.4.1-3. The test has two subtests with different frame time offset and SFN offset. Cell specific test parameters for the E-UTRA PCell and neighbour cell are given in Table 8.4.1.2.5-1 and 8.4.1.2.5-2, respectively.

In the measurement control information, it is indicated to the UE that inter-RAT SFTD measurement on Cell 2 is used. This test consists of single time period with time duration of T1. Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only.

Configure the frame time offset and SFN offset according to Test 1 in Table 8.4.1.2.4.1-3.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters of Cell 2 according to T1 in Table 8.4.1.2.5-2, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. UE shall transmit a *MeasurementReport* message triggered by SFTD measurement reporting. . If the overall delays measured from the beginning of time period T1 is less than 455 ms then the number of successful tests is increased by one, otherwise the number of failure tests is increased by one.
6. After the SS receive the *MeasurementReport* message in step 6) or when T1 expires, the SS shall transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
7. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod1008) for next iteration of the test procedure loop.
8. After the RRC connection release, the SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or
   - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.
10 Set the frame time offset and SFN offset for Test 2 according to Table 8.4.1.2.4.1-3 and repeat steps 1 to 9.

8.4.1.2.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions.

Table 8.4.1.2.4.3-1: Common Exception messages for E-UTRA - NR FR1 SFTD measurement delay in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and SFTD; Table H.3.4-4 with Condition INTER-RAT NR, SFTD and GAPLESS Table H.3.7-2 with Condition DRX.4
Specific message contents exceptions for Test Configuration 8.4.1.1-1, 8.4.1.1-2, 8.4.1.1-4 and 8.4.1.1-5	Table H.3.4-6 with Condition SSB.1 FR1 and SMTC.1 and
Specific message contents exceptions for Test Configuration 8.4.1.1-3 and 8.4.1.1-6	Table H.3.4-6 with Condition SSB.2 FR1 and SMTC.1

8.4.1.2.5 Test requirement

Table 8.4.1.2.4.1-3, 8.4.1.2.5-1 and 8.4.1.2.5-2 define the primary level settings including test tolerances for E-UTRA - NR FR1 SFTD measurement delay in DRX.

Table 8.4.1.2.5-1: E-UTRA Cell specific test parameters for E-UTRA - NR FR1 SFTD measurement delay in DRX

Parameter	Unit	E-UTRAN Cell1
E-UTRA RF Channel Number		1
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA[Note3]	dB	
OCNG_RB[Note3]	dB	
N_{oc}[Note4]	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	17
$\hat{E}_s/I_{ot}$	dB	17

RSRP Note5	dBm/15 kHz	-87
SCH_RP Note5	dBm/15 kHz	-87
Io Note5	dBm/Ch BW	-59.13+10log($N_{RB,c}$ /50)
Propagation Condition		AWGN
Antenna Configuration		1x2

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
NOTE 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 5: E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.4.1.2.5-2: NR Cell specific test parameters for E-UTRA - NR FR1 SFTD measurement delay in DRX

Parameter	Unit	Test configuration	Cell 2
NR RF Channel Number		Config 1,2,3,4,5,6	1
Duplex mode		Config 1,4	FDD
		Config 2,3,5,6	TDD
$BW_{channel}$	MHz	Config 1,4	10: $N_{RB,c}$ = 52
		Config 2,5	10: $N_{RB,c}$ = 52
		Config 3,6	40: $N_{RB,c}$ = 106
TDD configuration		Config 2,5	TDDConf.1.1
		Config 3,6	TDDConf.2.1
OCNG Pattern defined in A.3.2.1.1		Config 1,2,3,4,5,6	OP.1
SMTC configuration		Config 1,2,3,4,5,6	SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15
		Config 3,6	30
EPRE ratio of PSS to SSS	dB	Config 1,2,3,4,5,6	0
EPRE ratio of PBCH DMRS to SSS	dB		
EPRE ratio of PBCH to PBCH DMRS	dB		
EPRE ratio of OCNG DMRS to SSS Note 1	dB		
EPRE ratio of OCNG to OCNG DMRS Note 1	dB		
N_{oc} Note2	dBm/15kHz		-98
N_{oc} Note2	dBm/SCS	Config 1,2,4,5	-98
		Config 3,6	-95
SS-RSRP Note 3, 4	dBm/SCS	Config 1,2,4,5	-94
		Config 3,6	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6	4
Io Note 3	dBm/9.36MHz	Config 1,2,4,5	-64.59
	dBm/38.16MHz	Config 3,6	-58.49
Propagation Condition		Config 1,2,3,4,5,6	AWGN

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The overall delays measured is defined as the time from the beginning of time period T1, to the moment the UE send one SFTD measurement triggered measurement report.

The overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays because of TTI insertion uncertainty of the measurement report in DCCH.

The overall delays measured test requirement is expressed as:

- Overall delays measured = measurement reporting delay + TTI insertion uncertainty
- Measurement reporting delay = $T_{RRC_procedure_delay} + T_{measure_SFTD1} + T_{DRX_transmission}$

  $T_{RRC_procedure_delay}$ = 15 ms, is the RRC procedure delay for RRC reconfiguration, which is defined in TS 36.331 [2] Clause 11.2

  $T_{measure_SFTD1}$ = 280 ms, is the SFTD measurement report delay defined in TS 36.133 [23] clause 8.1.2.4.25 and 8.1.2.4.26 for FDD and TDD E-UTRA Cell 1, respectively. When DRX is used, the same $T_{measure_SFTD1}$ as for non-DRX applies.

  $T_{DRX_transmission}$ = 158 ms, it is the time until the next transmission in the worst case that the last PDDCH is missed at 280ms from the beginning of T1.
- TTI insertion uncertainty = 2 ms

The overall delays measured shall be less than a total of 455 ms.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

8.4.2 Inter-RAT measurements

8.4.2.0 Minimum conformance requirements

8.4.2.0.1 Minimum conformance requirements for E-UTRA - NR event-triggered measurement

The UE shall be able to identify new inter-RAT E-UTRAN – NR cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-RAT cells if carrier frequency information is provided by the PCell, even if no explicit neighbour list with physical layer cell identities is provided.

When measurement gaps are scheduled, the UE shall be able to identify a new detectable cell within $T_{identify_irat_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise, UE shall be able to identify a new detectable inter-RAT frequency cell within $T_{identify_irat_with_index}$. The UE shall be able to identify a new detectable inter-RAT SS block of an already detected cell within $T_{identify_irat_without_index.}$

$$T_{identify_irat_without_index} = (T_{PSS/SSS_sync_irat} + T_{SSB_measurement_period_irat}) \text{ ms}$$

$$T_{identify_irat_with_index} = (T_{PSS/SSS_sync_irat} + T_{SSB_measurement_period_irat} + T_{SSB_time_index_irat}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_irat}: it is the time period used in PSS/SSS detection given in table 8.4.2.0.1-1 and table 8.4.2.0.1-2.

$T_{SSB_time_index_irat}$: it is the time period used to acquire the index of the SSB being measured given in table 8.4.2.0.1-3 and table 8.4.2.0.1-4.

$T_{SSB_measurement_period_irat}$: equal to a measurement period of SSB based measurement given in table 8.4.2.0.1-5 and table 8.4.2.0.1-6.

M_{pss/sss_sync_irat}: For a UE supporting FR2 power class 1, M_{pss/sss_sync_ira}=64 samples. For a UE supporting FR2 power class 2 (vehicle mounted), M_{pss/sss_sync_irat}=40 samples. For a UE supporting FR2 power class 3 (handheld), M_{pss/sss_sync_irat}=40 samples. For a UE supporting FR2 power class 4, M_{pss/sss_syn_iratc}=40 samples.

$M_{SSB_index_irat}$: For a UE supporting power class 1, $M_{SSB_index_irat}$ =40 samples. For a vehicle mounted UE supporting power class 2 (vehicle mounted), M_{pss/sss_sync_irat}=24 samples.For a UE supporting power class 3 (handheld), $M_{SSB_index_irat}$ =24 samples. For a UE supporting power class 4, $M_{meas_period_irat}$ =24 samples.

$M_{meas_period_irat}$: For a UE supporting FR2 power class 1, $M_{meas_period_irat}$ =64 samples. For a vehicle mounted UE supporting FR2 power class 2 (vehicle mounted), M_{pss/sss_sync_irat}=40 samples.For a UE supporting FR2 power class 3 (handheld), $M_{meas_period_irat}$ =40 samples. For a UE supporting FR2 power class 4, $M_{meas_period_irat}$ =40 samples.

N_{freq} is defined in TS 36.133 [23] clause 8.1.2.1.1.

For per-FR measurement gap capable UE, when serving cells are in E-UTRA and measurement objects are only in FR2:

- UE can perform such measurements without gap; and
- UE fulfils the requirements for FR2 measurement objects based on effective MGRP = 20 ms.

Table 8.4.2.0.1-1: Time period for PSS/SSS detection, (Frequency range FR1)

Condition NOTE1,2	T_{PSS/SSS_sync_irat}
No DRX	max[600ms, 8 x max(MGRP, SMTC period)] x N_{freq}
DRX cycle ≤ 320ms	max[600ms, ceil(8x1.5) x max(MGRP, SMTC period, DRX cycle)] x N_{freq}
DRX cycle > 320ms	8 x DRX cycle x N_{freq}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 36.133 [23] clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in TS 36.133 [23] clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 8.4.2.0.1-1A: Time period for PSS/SSS detection for UE configured with *highSpeedInterRAT-r16* (Frequency range FR1)

Condition NOTE1,2	T_{PSS/SSS_sync_irat}
No DRX	Max(600ms, 8 × Max(MGRP, SMTC period)) × N_{freq}
DRX cycle < 320ms	Max(600ms, ceil(8 × M) × max(MGRP, SMTC period, DRX cycle)) ×N_{freq}
DRX cycle ≥ 320ms	8× DRX cycle ×N_{freq}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 of TS 38.133 [3]. NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 of TS 38.133 [3] are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: M = 1 when SMTC < = 40ms, and M = 1.5 when SMTC > 40ms.	

Table 8.4.2.0.1-2: Time period for PSS/SSS detection, (Frequency range FR2)

Condition NOTE1,2	T_{PSS/SSS_sync_irat}
No DRX	Max(600ms, M_{pss/sss_sync_irat} x max(MGRP, SMTC period)) x N_{freq}
DRX cycle ≤ 320ms	Max(600ms, (1.5 x M_{pss/sss_sync_irat}) x max(MGRP, SMTC period, DRX cycle)) x N_{freq}
DRX cycle > 320ms	M_{pss/sss_sync_irat} x DRX cycle x N_{freq}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 36.133 [23] clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in TS 36.133 [23] clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 8.4.2.0.1-3: Time period for time index detection (Frequency range FR1)

Condition NOTE1,2	$T_{SSB_time_index_irat}$
No DRX	Max(120ms, 3 x max(MGRP, SMTC period)) x N_{freq}
DRX cycle ≤ 320ms	Max(120ms, ceil(3 x 1.5) x max(MGRP, SMTC period,DRX cycle)) x N_{freq}
DRX cycle > 320ms	3 x DRX cycle x N_{freq}

NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 36.133 [23] clause 3.6.1
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in TS 36.133 [23] clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.

Table 8.4.2.0.1-3A: Time period for time index detection for UE configured with *highSpeedInterRAT-r16* (Frequency range FR1)

Condition NOTE1,2	$T_{SSB_time_index_irat}$
No DRX	$Max(120ms, 3 \times Max(MGRP, SMTC\ period)) \times N_{freq}$
DRX cycle < 320ms	$Max(120ms, Ceil(3 \times M) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times N_{freq}$
DRX cycle $\geq$ 320ms	$3 \times DRX\ cycle \times N_{freq}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 of TS 38.133 [3].	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 of TS 38.133 [3] are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: M = 1 when SMTC < = 40ms, and M = 1.5 when SMTC > 40ms.	

Table 8.4.2.0.1-4: Time period for time index detection (Frequency range FR2)

Condition NOTE1,2	$T_{SSB_time_index_irat}$
No DRX	$Max(200ms, M_{SSB_index_irat} \times max(MGRP, SMTC\ period)) \times N_{freq}$
DRX cycle ≤ 320ms	$Max(200ms, (1.5 \times M_{SSB_index_irat}) \times max(MGRP, SMTC\ period, DRX\ cycle)) \times N_{freq}$
DRX cycle > 320ms	$M_{SSB_index_irat} \times DRX\ cycle \times N_{freq}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 36.133 [23] clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in TS 36.133 [23] clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

In the requirements, an NR cell is considered to be detectable when:

- NR SS-RSRP related conditions in the accuracy requirements in clause 9.11.1 are fulfilled for a corresponding Band, together with the corresponding side conditions in clause B.2.3 of TS 38.133 [6],
- NR SS-RSRQ related conditions in the accuracy requirements in clause 9.11.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in clause B.2.3 of TS 38.133 [6],
- NR SS-SINR related conditions in the accuracy requirements in clause 9.11.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in clause B.2.3 of TS 38.133 [6].

When measurement gaps are scheduled for NR measurements the UE physical layer shall be capable of reporting NR SS-RSRP, SS-RSRQ, and SS-SINR measurements to higher layers with measurement accuracy as specified in TS 36.133 [23] clause 9.11, with measurement period as shown in table 8.4.2.0.1-5 and table 8.4.2.0.1-6:

Table 8.4.2.0.1-5: Measurement period for inter-RAT frequency measurements (Frequency FR1)

Condition NOTE1,2	$T_{SSB_measurement_period_irat}$
No DRX	$Max(200ms, 8 \times max(MGRP, SMTC\ period)) \times N_{freq}$
DRX cycle ≤ 320ms	$Max(200ms, ceil(8 \times 1.5) \times max(MGRP, SMTC\ period, DRX\ cycle)) \times N_{freq}$
DRX cycle > 320ms	$8 \times DRX\ cycle \times N_{freq}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 36.133 [23] clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in TS 36.133 [23] clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 8.4.2.0.1-5A: Measurement period for inter-RAT measurements for UE configured with *highSpeedInterRAT-r16* (Frequency range FR1)

Condition NOTE1,2	$T_{SSB_measurement_period_irat}$
No DRX	Max(200ms, 8 × Max(MGRP, SMTC period)) × N_{freq}
DRX cycle < 320ms	Max(200ms, ceil(8 × M) x max(MGRP, SMTC period, DRX cycle))×N_{freq}
DRX cycle ≥ 320ms	4× M × DRX cycle ×N_{freq}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 of TS 38.133 [50].	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 of TS 38.133 [50] are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: M = 1 when SMTC < = 40ms, and M = 1.5 when SMTC > 40ms.	

Table 8.4.2.0.1-6: Measurement period for inter-RAT frequency measurements (Frequency FR2)

Condition NOTE1,2	$T_{SSB_measurement_period_irat}$
No DRX	Max(400ms, $M_{meas_period_irat}$ x max(MGRP, SMTC period)) x N_{freq}
DRX cycle ≤ 320ms	Max(400ms, (1.5 x $M_{meas_period_irat}$) x max(MGRP, SMTC period, DRX cycle)) x N_{freq}
DRX cycle > 320ms	$M_{meas_period_irat}$ x DRX cycle x N_{freq}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 36.133 [23] clause 3.6.1.	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in TS 36.133 [23] clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

The UE shall be capable of performing NR SS-RSRP, SS-RSRQ, and SS-SINR for up to 7 NR carrier frequencies.

For each RAT E-UTRAN - NR layer on FR1 or FR2, the UE shall be capable of monitoring at least 4 cells.

For each RAT E-UTRAN - NR layer on FR1, during each layer 1 measurement period, the UE shall be capable of monitoring at least 7 SSBs with different SSB index and/or PCI on the RAT E-UTRA -NR.

For each RAT E-UTRA - NR layer on FR2, during each layer 1 measurement period, the UE shall be capable of monitoring at least 10 SSBs with different SSB index and/or PCI on the RAT E-UTRAN - NR layer. The UE shall be capable of monitoring at least one SSB per cell.

The NR SS-RSRP measurement accuracy for all measured cells shall be as specified in TS 36.133 [23] clause 9.11.1.
The NR SS-RSRQ measurement accuracy for all measured cells shall be as specified in TS 36.133 [23] clause 9.11.2.
The NR SS-SINR measurement accuracy for all measured cells shall be as specified in TS 36.133 [23] clause 9.11.3.

Reported measurements in event triggered measurement reports shall meet the requirements in TS 36.133 [23] clause 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any events that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify_irat_without_index}$ or $T_{identify_irat_with_index}$ for the minimum requirements. When L3 filtering is used or IDC autonomous denial or the UE is performing reception and/or transmission for ProSe Direct Discovery and/or ProSe Direct Communication, or the UE is configured to perform SRS carrier based switching, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_irat_without_index}$ or $T_{identify_irat_with_index}$ for the minimum requirements and then triggers the measurement report as per TS 36.331 [2], the event triggered measurement reporting delay shall be less than $T_{measurement_NR_FDD}$ provided the timing to that cell has not changed more than ±3200 Tc while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used or IDC autonomous denial is configured or the UE is performing reception and/or transmission for ProSe Direct Discovery and/or ProSe Direct Communication, or the UE is configured to perform SRS carrier based switching, an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [23] clause 8.1.2.4.21 and 8.1.2.4.22.

8.4.2.0.2 Void

8.4.2.1 E-UTRA event-triggered reporting of a NR FR1 neighbour cell without SSB time index detection in non-DRX

8.4.2.1.1 Test purpose

The purpose of this test isto verify that the UE makes correct reporting of an event and to verify partly the NR inter-RAT cell search requirements for E-UTRA FDD - NR FR1 measurements given in TS 36.133 [23] clause 8.1.2.4.21 and for E-UTRAN TDD - NR FR1 measurements given in TS 36.133 [23] clause 8.1.2.4.22.

8.4.2.1.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards and capable of NR measurements.

8.4.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.2.1.

8.4.2.1.4 Test description

The test consists of two sub-tests with two cells configured, the E-UTRA PCell and NR neighbour cell. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR neighbour cell. The UE is not required to report SSB time index.

8.4.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.2.1.4.1-1.

Table 8.4.2.1.4.1-1: Supported test configurations for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in non-DRX

Configuration	Description
8.4.2.1-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.2.1-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.2.1-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8.4.2.1-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.2.1-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.2.1-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.4.2.1.4.1-2.

Table 8.4.2.1.4.1-2: Initial conditions for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in non-DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 8.4.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.4.2.1.4.1-3.
2. Message contents are defined in clause 8.4.2.1.4.3.
3. There are two carriers and two cells specified in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table 8.4.2.1.5-1 for this test. Cell 1 is configured according to clauses C.1.1 and C.1.2.

Table 8.4.2.1.4.1-3: General test parameters for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Numbers		1, 2, 3, 4, 5, 6	1	One E-UTRA carrier frequency is used.
NR RF Chanel Number		1, 2, 3, 4, 5, 6	1	One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset		1, 2, 3, 4, 5, 6	39	As specified in TS 36.331 [29].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1	E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [29]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [29]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
CP length		1, 2, 3, 4, 5, 6	Normal	
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3µs	Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	1	
NOTE 1: The value of b2-Threshold1 is defined in Table 8.4.2.1.5-1. NOTE 2: The value of b2-Threshold2NR is defined in Table 8.4.2.1.5-2.				

8.4.2.1.4.2 Test procedure

Two cells are deployed in the test, which are E-UTRA PCell (Cell 1) on the E-UTRA carrier and a FR1 NR neighbour cell (Cell 2) on NR carrier. The general and cell specific test parameters for PCell and neighbour cell are given in Table 8.4.2.1.4.1-3, 8.4.2.1.5-1 and 8.4.2.1.5-2, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 is used. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

2. Set the parameters of Cell 1 and Cell 2 according to T1 in Table 8.4.2.1.5-1 and Table 8.4.2.1.5-2 respectively, T1 starts.

3. The SS shall transmit an *RRCConnectionReconfiguration* message.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the parameters setting from T1 to T2 as specified in Table 8.4.2.1.5-1 and Table 8.4.2.1.5-2 respectively. T2 Starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 922 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources, or

- switch off the UE.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS:

- transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or

- switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.4.2.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions.

Table 8.4.2.1.4.3-1: Common Exception messages for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and EVENT B2; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 Table H.3.4-5 with Condition Pattern #0
Specific message contents exceptions for Test Configuration 8.4.2.1-1 and 8.4.2.1-4	Table H.3.4-6 with Conditions SMTC.2, SSB.1 FR1 and Asynchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.1-2 and 8.4.2.1-5	Table H.3.4-6 with Conditions SMTC.1, SSB.1 FR1 and Synchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.1-3 and 8.4.2.1-6	Table H.3.4-6 with Conditions SMTC.1, SSB.2 FR1 and Synchronous cells

Table 8.4.2.1.4.3-2: SchedulingRequest-Config-DEFAULT

Derivation Path: TS 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 8.4.2.1-1/2/3
	22		Config 8.4.2.1-4/5/6

}			
}			

8.4.2.1.5 Test requirement

Table 8.4.2.1.4.1-3, 8.4.2.1.5-1 and 8.4.2.1.5-2 define the primary level settings including test tolerances for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in non-DRX.

Table 8.4.2.1.5-1: E-UTRAN PCell specific test parameters for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in non-DRX

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	17	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-56.12	-56.12
Propagation Condition [Note6]		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix [Note6]		1, 2, 3, 4, 5, 6	1x2	
NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].				

NOTE 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 8.4.2.1.5-2: NR neighbour cell specific test parameters for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5	10: $N_{RB,c}$ = 52	
		3, 6	40: $N_{RB,c}$ = 106	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Io Note3	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.94	-56.15
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 922 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

NOTE: The overall delay requirement is defined as the delay requirement in TS 38.133 plus 2 ms corresponding to the TTI insertion uncertainty of the measurement report in DCCH.

8.4.2.2 E-UTRA event-triggered reporting of a NR FR1 neighbour cell without SSB time index detection in DRX

8.4.2.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event and to verify partly the NR inter-RAT cell search requirements given in clause 8.1.2.4.21 of TS 36.133 for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 for E-UTRAN TDD-NR measurements.

8.4.2.2.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards supporting long DRX cycle and capable of NR measurements.

8.4.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.2.2.

8.4.2.2.4 Test description

The test consists of two sub-tests with two cells configured, the E-UTRA PCell and NR neighbour cell; the difference between the two sub-tests is the DRX configuration parameters. Each sub-test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR neighbour cell. In all sub-tests the UE is not required to report SSB time index.

8.4.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.2.2.4.1-1.

Table 8.4.2.2.4.1-1: Supported test configurations for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in DRX

Configuration	Description
8.4.2.2-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.2.2-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.2.2-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8.4.2.2-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.2.2-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.2.2-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.4.2.2.4.1-2.

Table 8.4.2.2.4.1-2: Initial conditions for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 8.4.2.2.4.1-1.	

Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.4.2.2.4.1-3.
2. Message contents are defined in clause 8.4.2.2.4.3.
3. There are two carriers and two cells specified in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table 8.4.2.2.5-1 for this test. Cell 1 is configured according to clauses C.1.1 and C.1.2.

Table 8.4.2.2.4.1-3: General test parameters for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1		One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset		1, 2, 3, 4, 5, 6	39		As specified in TS 36.331 [29].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1		E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [29]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [29]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
CP length		1, 2, 3, 4, 5, 6	Normal		
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.9	DRX.12	As specified in clause A.5
Time offset between serving and neighbour cells		1, 4	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs		Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	2	11	
NOTE 1: The value of b2-Threshold1 is defined in Table 8.4.2.2.5-1. NOTE 2: The value of b2-Threshold2NR is defined in Table 8.4.2.2.5-2.					

8.4.2.2.4.2 Test procedure

Two cells are deployed in the test, which are E-UTRA PCell (Cell 1) on the E-UTRA carrier and a FR1 NR neighbour cell (Cell 2) on NR carrier. The general and cell specific test parameters for PCell and neighbour cell are given in Table 8.4.2.2.4.1-3, 8.4.2.2.5-1 and 8.4.2.2.5-2, respectively.

DRX cycle = 40 ms is used in sub-test 1, DRX cycle = 640 ms is used in sub-test 2. The UE is allocated with PUSCH resource at every DRX cycle.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 is used. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters of Cell 1 and Cell 2 according to T1 in Table 8.4.2.2.5-1 and Table 8.4.2.2.5-2 respectively, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the parameters setting from T1 to T2 as specified in Table 8.4.2.2.5-1 and Table 8.4.2.2.5-2 respectively. T2 Starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than X ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one. Where X is,
   - 1082 for sub-test 1,
   - 10242 for sub-test 2.
7. .After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:
   - transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources, or
   - switch off the UE.
8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or
   - switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.4.2.2.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.4.2.2.4.3-1: Common Exception messages for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and EVENT B2; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 Table H.3.4-5 with Condition Pattern #0;Table H.3.7-2 with Condition DRX.9 and Gap for Test 1 Table H.3.7-2 with Condition DRX.12 and Gap for Test 2
Specific message contents exceptions for Test Configuration 8.4.2.2-1 and 8.4.2.2-4	Table H.3.4-6 with Conditions SMTC.2, SSB.1 FR1 and Asynchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.2-2 and 8.4.2.2-5	Table H.3.4-6 with Conditions SMTC.1, SSB.1 FR1 and Synchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.2-3 and 8.4.2.2-6	Table H.3.4-6 with Conditions SMTC.1, SSB.2 FR1 and Synchronous cells

Table 8.4.2.2.4.3-2: SchedulingRequest-Config-DEFAULT

Derivation Path: TS 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 8.4.2.2-1/2/3
	22		Config 8.4.2.2-4/5/6
}			
}			

8.4.2.2.5 Test requirement

Table 8.4.2.2.4.1-3, 8.4.2.2.5-1 and 8.4.2.2.5-2 define the primary level settings including test tolerances for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in DRX.

Table 8.4.2.2.5-1: E-UTRAN PCell specific test parameters for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in DRX

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				

OCNG_RA Note3				
OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2, 3, 4, 5, 6	17	17
RSRP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
Io Note5	dBm/9MHz	1, 2, 3, 4, 5, 6	-56.12	-56.12
Propagation Condition Note6		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix Note6		1, 2, 3, 4, 5, 6	1x2	

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
NOTE 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 8.4.2.2.5-2: NR neighbour cell specific test parameters for E-UTRA - NR FR1 event-triggered reporting without SSB time index detection in DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5	10: $N_{RB,c}$ = 52	
		3, 6	40: $N_{RB,c}$ = 106	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Io Note3	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.15
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	

Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1082 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 10242 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is not required to report SSB time index.

NOTE: The overall delay requirement is defined as the delay requirement in TS 38.133 plus 2 ms corresponding to the TTI insertion uncertainty of the measurement report in DCCH.

8.4.2.3 E-UTRA event-triggered reporting of a NR FR1 neighbour cell with SSB time index detection in non-DRX

8.4.2.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event and to verify partly the NR inter-RAT cell search requirements for E-UTRA FDD - NR FR1 measurements given in TS 36.133 [23] clause 8.1.2.4.21 and for E-UTRAN TDD - NR FR1 measurements given in TS 36.133 [23] clause 8.1.2.4.22.

8.4.2.3.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards and capable of NR measurements.

8.4.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.2.3.

8.4.2.3.4 Test description

The test consists of two cells configured, the E-UTRA PCell and NR neighbour cell. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR neighbour cell. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell.

8.4.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.2.3.4.1-1.

Table 8.4.2.3.4.1-1: Supported test configurations for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in non-DRX

Configuration	Description
8.4.2.3-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

8.4.2.3-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.2.3-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8.4.2.3-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.2.3-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.2.3-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.4.2.3.4.1-2.

Table 8.4.2.3.4.1-2: Initial conditions for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.4.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.4.2.3.4.1-3.
2. Message contents are defined in clause 8.4.2.3.4.3.
3. There are two carriers and two cells specified in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table 8.4.2.3.5-1 for this test. Cell 1 is configured according to clauses C.1.1 and C.1.2.

Table 8.4.2.3.4.1-3: General test parameters for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
E-UTRA RF Channel Numbers		1, 2, 3, 4, 5, 6	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset		1, 2, 3, 4, 5, 6	39	As specified in TS 36.331 [29].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1	E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [29]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [29]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
CP length		1, 2, 3, 4, 5, 6	Normal	
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3 ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs	Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	2	

NOTE 1: The value of b2-Threshold1 is defined in Table 8.4.2.3.5-1.
NOTE 2: The value of b2-Threshold2NR is defined in Table 8.4.2.3.5-2.

8.4.2.3.4.2 Test procedure

Two cells are deployed in the test, which are E-UTRA PCell (Cell 1) on the E-UTRA carrier and a FR1 NR neighbour cell (Cell 2) on NR carrier. The general and cell specific test parameters for PCell and neighbour cell are given in Table 8.4.2.3.4.1-3, 8.4.2.3.5-1 and 8.4.2.3.5-2, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 is used. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters of Cell 1 and Cell 2 according to T1 in Table 8.4.2.3.5-1 and Table 8.4.2.3.5-2 respectively, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the parameters setting from T1 to T2 as specified in Table 8.4.2.3.5-1 and Table 8.4.2.3.5-2 respectively. T2 Starts.
6. UE shall transmit a MeasurementReport message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 1042 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.
7. . After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources, or

   - switch off the UE.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS:

   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or

   - switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.4.2.3.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions.

Table 8.4.2.3.4.3-1: Common Exception messages for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and EVENT B2; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 Table H.3.4-5 with Condition Pattern #0 Table H.3.4-8 with Condition SSB-Index

Specific message contents exceptions for Test Configuration 8.4.2.3-1 and 8.4.2.3-4	Table H.3.4-6 with Conditions SMTC.2, SSB.1 FR1 and Asynchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.3-2 and 8.4.2.3-5	Table H.3.4-6 with Conditions SMTC.1, SSB.1 FR1 and Synchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.3-3 and 8.4.2.3-6	Table H.3.4-6 with Conditions SMTC.1, SSB.2 FR1 and Synchronous cells

Table 8.4.2.3.4.3-2: SchedulingRequest-Config-DEFAULT

Derivation Path: 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 8.4.2.3-1/2/3
	22		Config 8.4.2.3-4/5/6
}			
}			

8.4.2.3.5 Test requirement

Table 8.4.2.3.4.1-3, 8.4.2.3.5-1 and 8.4.2.3.5-2 define the primary level settings including test tolerances for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in non-DRX.

Table 8.4.2.3.5-1: E-UTRAN PCell specific test parameters for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in non-DRX

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				

Parameter	Unit	Configuration	Cell 1	
			T1	T2
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note3				
OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2, 3, 4, 5, 6	17	17
RSRP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
Io Note5	dBm/9MHz	1, 2, 3, 4, 5, 6	-56.12	-56.12
Propagation Condition Note6		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix Note6		1, 2, 3, 4, 5, 6	1x2	

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
NOTE 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 8.4.2.3.5-2: NR neighbour cell specific test parameters for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5	10: $N_{RB,c}$ = 52	
		3, 6	40: $N_{RB,c}$ = 106	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88

$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Io[Note3]	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.15
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1042 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

NOTE: The overall delay requirement is defined as the delay requirement in TS 38.133 plus 2 ms corresponding to the TTI insertion uncertainty of the measurement report in DCCH.

8.4.2.4 E-UTRA event-triggered reporting of a NR FR1 neighbour cell with SSB time index detection in DRX

8.4.2.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event and to verify partly the NR inter-RAT cell search requirements for E-UTRA FDD - NR FR1 measurements given in TS 36.133 [23] clause 8.1.2.4.21 and for E-UTRAN TDD - NR FR1 measurements given in TS 36.133 [23] clause 8.1.2.4.22.

8.4.2.4.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards supporting long DRX cycle and capable of NR measurements.

8.4.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.2.4.

8.4.2.4.4 Test description

The test consists of two sub-tests with two cells configured, the E-UTRA PCell and NR neighbour cell; the difference between the two sub-tests is the DRX configuration. Each subtest consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR neighbour cell. In measurements configuration UE shall be indicated to report the SSB index of the identified NR cell.

8.4.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.2.4.4.1-1.

Table 8.4.2.4.4.1-1: Supported test configurations for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in DRX

Configuration	Description

8.4.2.4-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.2.4-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.2.4-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8.4.2.4-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.2.4-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.2.4-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.4.2.4.4.1-2.

Table 8.4.2.4.4.1-2: Initial conditions for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.4.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.4.2.4.4.1-3.
2. Message contents are defined in clause 8.4.2.4.4.3.
3. There are two carriers and two cells specified in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Table 8.4.2.4.5-1 for this test. Cell 1 is configured according to clauses C.1.1 and C.1.2.

Table 8.4.2.4.4.1-3: General test parameters for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1		One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset		1, 2, 3, 4, 5, 6	39		As specified in TS 36.331 [29].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1		E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [29]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [29]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
CP length		1, 2, 3, 4, 5, 6	Normal		
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.9	DRX.12	As specified in clause A.5

Time offset between serving and neighbour cells		1, 4	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs		Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	2	13	
NOTE 1: The value of b2-Threshold1 is defined in Table 8.4.2.4.5-1. NOTE 2: The value of b2-Threshold2NR is defined in Table 8.4.2.4.5-2.					

8.4.2.4.4.2 Test procedure

Two cells are deployed in the test, which are E-UTRA PCell (Cell 1) on the E-UTRA carrier and a FR1 NR neighbour cell (Cell 2) on NR carrier. The general and cell specific test parameters for PCell and neighbour cell are given in Table 8.4.2.4.4.1-3, 8.4.2.4.5-1 and 8.4.2.4.5-2, respectively.

DRX cycle = 40 ms is used in sub-test 1 and sub-test 3, DRX cycle = 640 ms is used in sub-test 2 and sub-test 4. The UE is allocated with PUSCH resource at every DRX cycle.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 is used. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in State 3A-RF according to TS 36.508 clause 7.2A.3.
2. Set the parameters of Cell 1 and Cell 2 according to T1 in Table 8.4.2.4.5-1 and Table 8.4.2.4.5-2 respectively, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the parameters setting from T1 to T2 as specified in Table 8.4.2.4.5-1 and Table 8.4.2.4.5-2 respectively. T2 Starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than X ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one. Where X is,
   - 1282 for sub-test 1,
   - 12162 for sub-test 2.
7. . After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:
   - transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources, or
   - switch off the UE.
8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or
   - switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.4.2.4.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.4.2.4.4.3-1: Common Exception messages for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and EVENT B2; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 Table H.3.4-5 with Condition Pattern #0 Table H.3.4-8 with Condition SSB-Index Table H.3.7-2 with Condition DRX.9 and Gap for Test 1 Table H.3.7-2 with Condition DRX.12 and Gap for Test 2
Specific message contents exceptions for Test Configuration 8.4.2.4-1 and 8.4.2.4-4	Table H.3.4-6 with Conditions SMTC.2, SSB.1 FR1 and Asynchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.4-2 and 8.4.2.4-5	Table H.3.4-6 with Conditions SMTC.1, SSB.1 FR1 and Synchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.4-3 and 8.4.2.4-6	Table H.3.4-6 with Conditions SMTC.1, SSB.2 FR1 and Synchronous cells

Table 8.4.2.4.4.3-2: SchedulingRequest-Config-DEFAULT

Derivation Path: 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 8.4.2.4-1/2/3
	22		Config 8.4.2.4-4/5/6
}			
}			

8.4.2.4.5 Test requirement

Table 8.4.2.4.4.1-3, 8.4.2.4.5-1 and 8.4.2.4.5-2 define the primary level settings including test tolerances for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in DRX.

Table 8.4.2.4.5-1: E-UTRAN PCell specific test parameters for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in DRX

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD	

Parameter	Unit	Configuration	Cell 1	
			T1	T2
			20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	17	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-56.12	-56.12
Propagation Condition [Note6]		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix [Note6]		1, 2, 3, 4, 5, 6	1x2	

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
NOTE 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 8.4.2.4.5-2: NR neighbour cell specific test parameters for E-UTRA - NR FR1 event-triggered reporting with SSB time index detection in DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5	10: $N_{RB,c}$ = 52	
		3, 6	40: $N_{RB,c}$ = 106	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	

b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Io Note3	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.15
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1282 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 12162 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is required to report SSB time index.

NOTE: The overall delay requirement is defined as the delay requirement in TS 38.133 plus 2 ms corresponding to the TTI insertion uncertainty of the measurement report in DCCH.

8.4.2.5 E-UTRA event-triggered reporting of a NR FR2 neighbour cell without SSB time index detection in non-DRX

Editor's Note: This test case is incomplete:

- *EUTRA – NR FR2 testability issue is not cleared*
- *The TT analysis is complete for test frequency f ≤ 40.8 GHz*
- *The TT analysis is complete for UE PC3*
- *The test is incomplete for UE power classes other than PC3*

- *The test is incomplete for test frequencies > 40.8 GHz*

8.4.2.5.1 Test purpose

To verify the UE's ability to make a correct reporting of an event without SSB time index detection in non-DRX within E-UTRA - NR FR2 cell search requirements.

8.4.2.5.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards and capable of NR FR2 measurements.

8.4.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.2.5.

8.4.2.5.4 Test description

8.4.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.2.5.4.1-1.

Table 8.4.2.5.4.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in non-DRX

Configuration	Description
8.4.2.5-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
8.4.2.5-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.4.2.5.4.1-2.

Table 8.4.2.5.4.1-2: Initial conditions for E-UTRA - NR FR2 event-triggered reporting without SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.4.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.4.2.5.4.1-3.
2. Message contents are defined in clause 8.4.2.5.4.3.
3. There are two carriers and two cells specified in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR FR2 neighbour cell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to clause A.6.1.2 for this test.

Table 8.4.2.5.4.1-3: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value	Comment

E-UTRA RF Channel Number		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1	One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.6.1.2.
Neighbour cell		1, 2	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [23]. For UEs not supporting per-FR gap (*independentGapConfig*)
			N/A	For UEs supporting per-FR gap (*independentGapConfig*)
Measurement gap offset		1, 2	39	As specified in TS 36.331 [29]. For UEs not supporting per-FR gap (*independentGapConfig*)
			N/A	For UEs supporting per-FR gap (*independentGapConfig*)
b1-ThresholdNR	dBm	1, 2	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [29].
Hysteresis	dB	1, 2	0	
CP length		1, 2	Normal	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used.
DRX		1, 2	OFF	DRX is not used.
Time offset between serving and neighbour cells		1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs	Synchronous cells.
T1	s	1, 2	10	
T2	s	1, 2	6	
NOTE 1: The value of b1-ThresholdNR is defined in Table 8.4.2.5.5-1.				

8.4.2.5.4.2 Test procedure

Measurement gap pattern configuration # 0 as defined in Table 8.4.2.5.4.1-3 is provided for UE that does not support per-FR gap and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [29] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters of Cell 1 and Cell 2 according to Table A.6.1.2-1 and T1 in Table 8.4.2.5.5-1 respectively, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the parameters setting from T1 to T2 as specified in Table 8.4.2.5.5-1. T2 Starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event B1. If the overall delays measured from the beginning of time period T2 is less than X ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X is,
   - 3202 for UEs supporting per-FR gap (*independentGapConfig*),
   - 1602 for UEs supporting per-FR gap (*independentGapConfig*).
7. . After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

- transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources, or

- switch off the UE.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS:

- transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or

- switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.4.2.5.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.4.2.5.4.3-1: Common Exception messages for E-UTRA - NR FR2 event-triggered reporting without SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with condition INTER-RAT and EVENT B1; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B1 for UEs not supporting per-FR gap; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B1 and GAPLESS for UEs supporting per-FR gap; Table H.3.4-5 with Condition Pattern #0 for UEs not supporting per-FR gap;
Specific message contents exceptions for Test Configuration 8.4.2.5-1	Table H.3.4-6 with Conditions SMTC.2, SSB.3 FR2 and Asynchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.5-2	Table H.3.4-6 with Conditions SMTC.1, SSB.3 FR2 and Synchronous cells

Table 8.4.2.5.4.3-2: SchedulingRequest-Config-DEFAULT

Derivation Path: 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 8.4.2.5-1/2/3
	22		Config 8.4.2.5-4/5/6
}			
}			

8.4.2.5.5 Test requirement

Tables 8.4.2.5.4.1-3 and 8.4.2.5.5-1 define the primary level settings including test tolerances for E-UTRA - NR FR2 event-triggered reporting without SSB time index detection in non-DRX.

Table 8.4.2.5.5-1: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2

			T1	T2
AoA setup defined in A.9.2.1		1, 2	Setup 2a	
Assumption for UE beams[Note 5]		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	
TDD configuration		1, 2	TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 24	
OCNG patterns defined in A.3.2.1.1		1, 2	OP. 3	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1	SMTC.2	
		2	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	
b1-ThresholdNR UE power class 3	dBm/SCS	1, 2	-118	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} $\hat{E}_s$	dBm/SCS	1, 2	- Infinity	-80.6
SS B_RP [Note 3]	dBm/SCS	1, 2	-Infinity	-80.6
$\hat{E}_s/I_{ot}$ BB [Note 6]	dB	1, 2	-Infinity	8.3
Io[Note3]	dBm/95.04MHz	1, 2	-Infinity	-56.0
Propagation Condition		1, 2	AWGN	

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Information about types of UE beam is given in 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation
Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Table 8.4.2.5.5-2: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Test case	Measurement reporting delay (ms)	
	D1 ms	D2 ms
UE power class 3	3202	1602

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays specified in 36.133 [23] because of TTI insertion uncertainty of the measurement report in DCCH.

The UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms and D2 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

8.4.2.6 E-UTRA event-triggered reporting of a NR FR2 neighbour cell without SSB time index detection in DRX

Editor's Note: This test case is incomplete:

- *EUTRA – NR FR2 testability issue is not cleared*
- *The TT analysis is complete for test frequency f ≤ 40.8 GHz*
- *The TT analysis is complete for UE PC3*
- *The test is incomplete for UE power classes other than PC3*
- *The test is incomplete for test frequencies > 40.8 GHz*

8.4.2.6.1 Test purpose

To verify the UE's ability to make a correct reporting of an event without SSB time index detection in DRX within E-UTRA - NR FR2 cell search requirements.

8.4.2.6.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards supporting long DRX cycle and capable of NR FR2 measurements..

8.4.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.2.6.

8.4.2.6.4 Test description

8.4.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.2.6.4.1-1.

Table 8.4.2.6.4.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in DRX

Configuration	Description
8.4.2.6-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
8.4.2.6-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.4.2.6.4.1-2.

Table 8.4.2.6.4.1-2: Initial conditions for E-UTRA - NR FR2 event-triggered reporting without SSB time index detection in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.4.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	

Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 8.4.2.6.4.1-3.
2. Message contents are defined in clause 8.4.2.6.4.3.
3. There are two carriers and two cells specified in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR FR2 neighbour cell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to clause A.6.1.2 for this test.

Table 8.4.2.6.4.1-3: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1		One FR2 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.6.1.2.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [23]. For UEs not supporting per-FR gap (*independentGapConfig*)
			N/A		For UEs supporting per-FR gap (*independentGapConfig*)
Measurement gap offset		1, 2, 3, 4, 5, 6	39		As specified in TS 36.331 [29]. For UEs not supporting per-FR gap (*independentGapConfig*)
			N/A		For UEs supporting per-FR gap (*independentGapConfig*)
b1-ThresholdNR	dBm	1, 2	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [29].
Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
CP length		1, 2, 3, 4, 5, 6	Normal		
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used.
DRX		1, 2, 3, 4, 5, 6	DRX.9	DRX.12	As specified in clause A.3.3.
Time offset between serving and neighbour cells		1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs		Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	6	s83	
NOTE: The value of b1-ThresholdNR is defined in Table 8.4.2.6.5-1.					

8.4.2.6.4.2 Test procedure

Measurement gap pattern configuration # 0 as defined in Table 8.4.2.6.4.1-3 is provided for UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [29] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters of Cell 1 and Cell 2 according to Table A.6.1.2-1 and T1 in Table 8.4.2.6.5-1 respectively, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the parameters setting from T1 to T2 as specified in Table 8.4.2.6.5-1. T2 Starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event B1. If the overall delays measured from the beginning of time period T2 is less than X ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X is,
   - 4802 for sub-test 1,
   - 51202 for sub-test 2.
7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:
   - transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources, or
   - switch off the UE
8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or
   - switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.4.2.6.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.4.2.6.4.3-1: Common Exception messages for E-UTRA - NR FR2 event-triggered reporting without SSB time index detection in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with condition INTER-RAT and EVENT B1; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B1 for UEs not supporting per-FR gap; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B1 and GAPLESS for UEs supporting per-FR gap; Table H.3.4-5 with Condition Pattern #0 for UEs not supporting per-FR gap; Table H.3.7-2 with Condition DRX.9 for Test 1 Table H.3.7-2 with Condition DRX.12 for Test 2
Specific message contents exceptions for Test Configuration 8.4.2.6-1	Table H.3.4-6 with Conditions SMTC.2, SSB.3 FR2 and Asynchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.6-2	Table H.3.4-6 with Conditions SMTC.1, SSB.3 FR2 and Synchronous cells

Table 8.4.2.6.4.3-2: SchedulingRequest-Config-DEFAULT

Derivation Path: 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 8.4.2.6-1/2/3
	22		Config 8.4.2.6-4/5/6
}			
}			

8.4.2.6.5 Test requirement

Tables 8.4.2.6.4.1-3 and 8.4.2.6.5-1 define the primary level settings including test tolerances for E-UTRA - NR FR2 event-triggered reporting without SSB time index detection in DRX.

Table 8.4.2.6.5-1: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Parameter	**Unit**	**Test configuration**	**Cell 2**	
			T1	**T2**
AoA setup defined in A.9.1		1, 2	Setup 1	
Assumption for UE beams Note 5		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	
TDD configuration		1, 2	TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66	
OCNG patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1	SMTC.2	
		2	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	
b1-ThresholdNR UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-104.7	
N_{oc} Note2	dBm/SCS	1, 2	-95.7	
SS-RSRP Note 3	dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$	dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8
Io Note3	dBm/95.04MHz	1, 2	-66.7	-58.0
Propagation Condition		1, 2	AWGN	

Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Information about types of UE beam is given in 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation

Table 8.4.2.6.5-2: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Test case	Measurement reporting delay (ms)			
	D1 ms	D2 ms	D3 ms	D4 ms
UE power class 3	4802	51202	4802	51202

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays specified in 36.133 [23] because of TTI insertion uncertainty of the measurement report in DCCH.

In test 1, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms and D3 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms and D4 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is not required to report SSB time index.

8.4.2.7 E-UTRA event-triggered reporting of a NR FR2 neighbour cell with SSB time index detection in non-DRX

Editor's Note: This test case is incomplete:

- *EUTRA – NR FR2 testability issue is not cleared*
- *The TT analysis is complete for test frequency f ≤ 40.8 GHz*
- *The TT analysis is complete for UE PC3*
- *The test is incomplete for UE power classes other than PC3*
- *The test is incomplete for test frequencies > 40.8 GHz*

8.4.2.7.1 Test purpose

To verify the UE's ability to make a correct reporting of an event with SSB time index detection in non-DRX within E-UTRA - NR FR2 cell search requirements.

8.4.2.7.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards and capable of NR FR2 measurements.

8.4.2.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.2.7.

8.4.2.7.4 Test description

8.4.2.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.2.7.4.1-1.

Table 8.4.2.7.4.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR2 in non-DRX

Configuration	Description
8.4.2.7-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
8.4.2.7-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.4.2.7.4.1-2.

Table 8.4.2.7.4.1-2: Initial conditions for E-UTRA - NR FR2 event-triggered reporting with SSB time index detection in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.4.2.7.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.4.2.7.4.1-3.
2. Message contents are defined in clause 8.4.2.7.4.3.
3. There are two carriers and two cells specified in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR FR2 neighbour cell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to clause A.6.1.2 for this test.

Table 8.4.2.7.4.1-3: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
E-UTRA RF Channel Numbers		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Channel Numbers		1, 2	1	One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.6.1.2.
Neighbour cell		1, 2	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [23]. For UEs not supporting per-FR gap (*independentGapConfig*)
			N/A	For UEs supporting per-FR gap (*independentGapConfig*)
Measurement gap offset		1, 2	39	As specified in TS 36.331 [29]. For UEs not supporting per-FR gap (*independentGapConfig*)

			N/A	For UEs supporting per-FR gap (*independentGapConfig*)
b1-ThresholdNR	dBm	1, 2	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [29]
Hysteresis	dB	1, 2	0	
CP length		1, 2	Normal	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used.
DRX		1, 2	OFF	DRX is not used.
Time offset between serving and neighbour cells		1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs	Synchronous cells.
T1	s	1, 2	5	
T2	s	1, 2	5	
NOTE: The value of b1-ThresholdNR is defined in Table A.8.4.2.7.5-1.				

8.4.2.7.4.2 Test procedure

Measurement gap pattern configuration # 0 as defined in Table 8.4.2.7.4.1-3 is provided for UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [29] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters of Cell 1 and Cell 2 according to Table A.6.1.2-1 and T1 in Table 8.4.2.7.5-1 respectively, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the parameters setting from T1 to T2 as specified in Table 8.4.2.7.5-1. T2 Starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event B1. If the overall delays measured from the beginning of time period T2 is less than X ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X is,
   - 4162 for UEs supporting per-FR gap (*independentGapConfig*),
   - 2082 for UEs not supporting per-FR gap (*independentGapConfig*).
7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:
   - transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources, or
   - switch off the UE.
8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or

- switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.4.2.7.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.4.2.7.4.3-1: Common Exception messages for E-UTRA - NR FR2 event-triggered reporting with SSB time index detection in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with condition INTER-RAT and EVENT B1; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B1 for UEs not supporting per-FR gap; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B1 and GAPLESS for UEs supporting per-FR gap; Table H.3.4-5 with Condition Pattern #0 for UEs not supporting per-FR gap;
Specific message contents exceptions for Test Configuration 8.4.2.7-1	Table H.3.4-6 with Conditions SMTC.2, SSB.3 FR2 and Asynchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.7-2	Table H.3.4-6 with Conditions SMTC.1, SSB.3 FR2 and Synchronous cells

Table 8.4.2.7.4.3-2: SchedulingRequest-Config-DEFAULT

Derivation Path: 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 8.4.2.7-1/2/3
	22		Config 8.4.2.7-4/5/6
}			
}			

Table 8.4.2.7.4.3-3: ReportConfigInterRAT

Derivation Path: 36.508 [25] Table 4.6.6-7BA			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB1-NR-r15 SEQUENCE{			
b1-Threshold2NR-r15 CHOICE{			
nr-RSRP-r15	50	Actual value = 50 -156 = -106dBm	
}			
}			
}			
}			
}			
maxReportRS-Index-r15	2		
reportQuantityRS-IndexNR-r15 SEQUENCE {			
ss-rsrp	TRUE		
ss-rsrq	FALSE		
ss-sinr	FALSE		
}			
}			

8.4.2.7.5 Test requirement

Tables 8.4.2.7.4.1-3 and 8.4.2.7.5-1 define the primary level settings including test tolerances for E-UTRA - NR FR2 event-triggered reporting with SSB time index detection in non-DRX.

Table 8.4.2.7.5-1: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup defined in A.9.1		1, 2	Setup 1	
Assumption for UE beams Note 5		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	
TDD configuration		1, 2	TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66	
OCNG patterns defined in A.3.2.1.1		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1	SMTC.2	
		2	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	
b1-ThresholdNR UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
$N_{\hat{}}$ Note2	dBm/15kHz	1, 2	-104.7	
N_{oc} Note2	dBm/SCS	1, 2	-95.7	
SS-RSRP Note 3	dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$	dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8
Io Note3	dBm/95.04MHz	1, 2	-66.7	-58.0
Propagation Condition		1, 2	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Information about types of UE beam is given in 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation

Table 8.4.2.7.5-2: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Test case	Measurement reporting delay (ms)	
	D1 ms	D2 ms
UE power class 3	4162	2082

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays specified in 36.133 [23] because of TTI insertion uncertainty of the measurement report in DCCH.

The UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms and D2 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

8.4.2.8 E-UTRA event-triggered reporting of a NR FR2 neighbour cell with SSB time index detection in DRX

Editor's Note: This test case is incomplete:

- *EUTRA – NR FR2 testability issue is not cleared*
- *The TT analysis is complete for test frequency f ≤ 40.8 GHz*
- *The TT analysis is complete for UE PC3*
- *The test is incomplete for UE power classes other than PC3*
- *The test is incomplete for test frequencies > 40.8 GHz*

8.4.2.8.1 Test purpose

To verify the UE's ability to make a correct reporting of an event with SSB time index detection in DRX within E-UTRA - NR FR2 cell search requirements.

8.4.2.8.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards supporting long DRX cycle and capable of NR FR2 measurements.

8.4.2.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.2.8.

8.4.2.8.4 Test description

8.4.2.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.2.8.4.1-1.

Table 8.4.2.8.4.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in DRX

Configuration	Description
8.4.2.8-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
8.4.2.8-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.4.2.8.4.1-2.

Table 8.4.2.8.4.1-2: Initial conditions for E-UTRA - NR FR2 event-triggered reporting with SSB time index detection in DRX

Parameter	Value	Comment

Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.4.2.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.4.2.8.4.1-3.
2. Message contents are defined in clause 8.4.2.8.4.3.
3. There are two carriers and two cells specified in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR FR2 neighbour cell on the NR carrier. Cell 1 is the cell used for connection setup with the power level set according to clause A.6.1.2 for this test.

Table 8.4.2.8.4.1-3: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Numbers		1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Numbers		1, 2	1		One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.6.1.2.
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [23]. For UEs not supporting per-FR gap (*independentGapConfig*)
			N/A		For UEs supporting per-FR gap (*independentGapConfig*)
Measurement gap offset		1, 2	39		As specified in TS 36.331 [29]. For UEs not supporting per-FR gap (*independentGapConfig*)
			N/A		For UEs supporting per-FR gap (*independentGapConfig*)
b1-ThresholdNR	dBm	1, 2	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [29].
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used.
DRX			DRX.9	DRX.12	As specified in clause A.3.3.
Time offset between serving and neighbour cells		1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs		Synchronous cells.
T1	s	1, 2	5		
T2	s	1, 2	7	70	
NOTE: The value of b1-ThresholdNR is defined in Table 8.4.2.8.5-1					

8.4.2.8.4.2 Test procedure

Measurement gap pattern configuration # 0 as defined in Table 8.4.2.8.4.1-3 is provided for UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [29] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters of Cell 1 and Cell 2 according to Table A.6.1.2-1 and T1 in Table 8.4.2.8.5-1 respectively, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the parameters setting from T1 to T2 as specified in Table 8.4.2.8.5-1. T2 Starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event B1. If the overall delays measured from the beginning of time period T2 is less than X ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X is,
   - 6242 for sub-test 1,
   - 66562 for sub-test 2.
7. . After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:
   - transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources, or
   - switch off the UE.
8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or
   - switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.4.2.8.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.4.2.8.4.3-1: Common Exception messages for E-UTRA - NR FR2 event-triggered reporting with SSB time index detection in DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.4-7 with condition INTER-RAT and EVENT B1; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B1 for UEs not supporting per-FR gap; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B1 and GAPLESS for UEs supporting per-FR gap; Table H.3.4-5 with Condition Pattern #0 for UEs not supporting per-FR gap; Table H.3.7-2 with Condition DRX.9 for Test 1; Table H.3.7-2 with Condition DRX.12 for Test 2
Specific message contents exceptions for Test Configuration 8.4.2.8-1	Table H.3.4-6 with Conditions SMTC.2, SSB.3 FR2 and Asynchronous cells
Specific message contents exceptions for Test Configuration 8.4.2.8-2	Table H.3.4-6 with Conditions SMTC.1, SSB.3 FR2 and Synchronous cells

Table 8.4.2.8.4.3-2: SchedulingRequest-Config-DEFAULT

Derivation Path: 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 8.4.2.8-1/2/3
	22		Config 8.4.2.8-4/5/6
}			
}			

Table 8.4.2.8.4.3-3: ReportConfigInterRAT

Derivation Path: 36.508 [25] Table 4.6.6-7BA			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventB1-NR-r15 SEQUENCE{			
b1-Threshold2NR-r15 CHOICE{			
nr-RSRP-r15	50	Actual value = 50 -156 = -106dBm	
}			
}			
}			
}			
}			
maxReportRS-Index-r15	2		
reportQuantityRS-IndexNR-r15 SEQUENCE {			
ss-rsrp	TRUE		
ss-rsrq	FALSE		
ss-sinr	FALSE		
}			
}			

8.4.2.8.5 Test requirement

Tables 8.4.2.8.4.1-3 and 8.4.2.8.5-1 define the primary level settings including test tolerances for E-UTRA - NR FR2 event-triggered reporting with SSB time index detection in DRX.

Table 8.4.2.8.5-1: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2

AoA setup defined in A.9.1		1, 2	Setup 1	
Assumption for UE beams[Note 5]		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	
TDD configuration		1, 2	TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66	
OCNG patterns defined in A.3.2.1.1		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1	SMTC.2	
		2	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	
b1-ThresholdNR UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} [Note2]	dBm/15kHz	1, 2	-104.7	
N_{oc} [Note2]	dBm/SCS	1, 2	-95.7	
SS-RSRP [Note 3]	dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$	dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8
Io[Note3]	dBm/95.04MHz	1, 2	-66.7	-58.0
Propagation Condition		1, 2	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Information about types of UE beam is given in 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation

Table 8.4.2.8.5-2: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

Test case	Measurement reporting delay (ms)			
	D1 ms	D2 ms	D3 ms	D4 ms
UE power class 3	6242	66562	6242	66562

In test 1, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms and D3 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms and D4 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays specified in 36.133 [23] because of TTI insertion uncertainty of the measurement report in DCCH.

8.4.2.9 E-UTRA event triggered reporting of a NR FR1 neighbour cell with SSB time index detection in DRX for UE configured with highSpeedInterRAT-NR-r16

8.4.2.9.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event and to verify partly the NR inter-RAT cell search requirements for E-UTRA FDD - NR FR1 measurements given in TS 36.133 [23] clause 8.1.2.4.21 and for E-UTRAN TDD - NR FR1 measurements given in TS 36.133 [23] clause 8.1.2.4.22 when UE is configured with *highSpeedInterRAT-NR-r16*.

8.4.2.9.2 Test applicability

This test applies to all E-UTRA UEs capable of NR measurements and configured with highSpeedInterRAT-NR-r16 from release 15 onwards.

8.4.2.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.2.9.

8.4.2.9.4 Test description

8.4.2.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.2.9.4.1-1.

Table 8.4.2.9.4.1-1: Supported test configurations for NR inter-RAT event triggered reporting for FR1 with SSB time index detection for UE configured with highSpeedInterRAT-NR-r16

Configuration	Description
8.4.2.9-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.2.9-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.2.9-3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8.4.2.9-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
8.4.2.9-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
8.4.2.9-6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 8.4.2.9.4.1-2.

Table 8.4.2.9.4.1-2: Initial conditions for NR inter-RAT event triggered reporting for FR1 with SSB time index detection for UE configured with highSpeedInterRAT-NR-r16

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.4.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 8.4.2.9.4.1-3: General test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1	E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
CP length		1, 2, 3, 4, 5, 6	Normal	
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.5	As specified in clause A.5
Time offset between serving and neighbour cells		1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3µs	Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	5	
NOTE 1: The value of b2-Threshold1 is defined in Table A.8.4.2.9.1-3. NOTE 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.9.1-4.				

8.4.2.9.4.2 Test procedure

Two cells are deployed in the test, which are E-UTRA PCell (Cell 1) on the E-UTRA carrier and a FR1 NR neighbour cell (Cell 2) on NR carrier. The general and cell specific test parameters for PCell and neighbour cell are given in Table 8.4.2.9.4.1-3, 8.4.2.9.5-1 and 8.4.2.9.5-2, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 is used. The test consists of two successive time periods, with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2. UE is configured with *highSpeedInterRAT-NR-r16*.

1. Ensure the UE is in State 3A-RF according to TS 36.508 clause 7.2A.3.
2. Set the parameters of Cell 1 and Cell 2 according to T1 in Table 8.4.2.9.5-1 and Table 8.4.2.9.5-2 respectively, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit *RRCConnectionReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the parameters setting from T1 to T2 as specified in Table 8.4.2.9.5-1 and Table 8.4.2.9.5-2 respectively. T2 Starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 4.8s ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. After the RRC connection release, the SS:

   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3),

   or

   - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

8.4.2.9.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.4.2.9.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks on condition of HighSpeedMeas with exceptions	Table H.2.1-3 with Condition HighSpeedMeas
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and EVENT B2; Table H.3.4-4 with Condition INTER-RAT NR and EVENT B2 Table H.3.4-5 with Condition Pattern #0 Table H.3.4-8 with Condition SSB-Index Table H.3.7-2 with Condition DRX.5 and Gap

Table 8.4.2.9.4.3-2: highSpeedCarrierNR-r16 in SystemInformationBlockType24

Derivation Path: TS 36.508, Table 4.4.3.3-20 with Condition FR1			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
CarrierFreqNR-v1610 ::= SEQUENCE {(SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
highSpeedCarrierNR-r16	TRUE		
}			

Table 8.4.2.9.4.3-3: highSpeedInterRAT-NR-r16 configuration

Derivation Path: 36.508 Table 4.6.3-14			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioResourceConfigCommonSIB::= SEQUENCE {			
highSpeedInterRAT-NR-r16	TRUE		
}			

8.4.2.9.5 Test requirement

Tables 8.4.2.9.4.1-3, 8.4.2.9.5-1 and 8.4.2.9.5-2 define the primary level settings including test tolerances for E-UTRA - NR FR2 event-triggered reporting with SSB time index detection in DRX for UE configured with highSpeedInterRAT-NR-r16.

Table 8.4.2.9.5-1: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting with NR neighbour cell in FR1 with SSB time index detection for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration[Note1]		4, 5, 6	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6	17	17
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix [Note6]		1, 2, 3, 4, 5, 6	1x2 Low	

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
NOTE 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Parameter	Unit	Configuration	Cell 1	
			T1	T2
NOTE 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
NOTE 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table 8.4.2.9.5-2: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5	10: $N_{RB,c}$ = 52	
		3, 6	40: $N_{RB,c}$ = 106	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
N_{oc} Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Io Note3	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.16
Propagation Condition		1, 2, 4, 5	AWGN1944	
		3,6	AWGN3334	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 4.8s from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB

index in this test. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

8.4.3 Inter-RAT measurements without gaps

8.4.3.0 Minimum conformance requirements

8.4.3.0.1 Minimum conformance requirements for inter-RAT event-triggered reporting without gap

FFS

8.4.3.1 E-UTRAN - NR SA FR2 event-triggered reporting without gap with interruption

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Test applicability is missing in 38.522
- Message contents are FFS
- Test procedure is missing
- Minimum conformance requirement is FFS

8.4.3.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event without gap. The test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.29 of TS 36.133 [23] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.30 of TS 36.133 [23] for E-UTRAN TDD-NR measurements, as well as the interruption requirements in clause 7.8.2.22 of TS 38.133 [6].

8.4.3.1.2 Test applicability

This test applies to all types of NR UE from release 18 onwards supporting inter-RAT measurements without gaps.

8.4.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.4.3.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.8.4.3.1.

8.4.3.1.4 Test description

8.4.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.4.3.1.4.1-1

Table 8.4.3.1.4.1-1: Supported test configurations

Configuration	Description
8.4.3.1-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
8.4.3.1-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE 1: The UE is only required to be tested in one of the supported test configurations.	

Test environment parameters are given in Table 8.4.3.1.4.1-2.

Table 8.4.3.1.4.1-2: Initial conditions for TBD

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 8.4.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.4.3.1.4.1-3.
2. Message contents are defined in clause 8.4.3.1.4.3.
3. Two cells are deployed in the TBD.

Table 8.4.3.1.4.1-3: General test parameters for NR inter-RAT event triggered reporting for FR2 without MG nor DRX

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1	One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in TS 38.133 [6] clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2	NR cell 2 is on NR RF channel number 1.
b1-ThresholdNR	dBm	1, 2	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
SMTC configuration		1, 2	SMTC.3	As defined in A.4
Hysteresis	dB	1, 2	0	
CP length		1, 2	Normal	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 2	3μs	Synchronous cells.
T1	s	1, 2	10	
T2	s	1, 2		
NOTE 1: The value of b1-ThresholdNR is defined in table 8.4.3.1.5-1				

8.4.3.1.4.2 Test procedure

TBD

8.4.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

TBD

8.4.3.1.5 Test requirements

Table 8.4.3.1.4.1-3 and 8.4.3.1.5-1 define the primary level settings for all tests.

Table 8.4.3.1.5-1: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup defined in A.3.15.2.1		1, 2	Setup 2a	
Assumption for UE beams Note 5		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	
TDD configuration		1, 2	TDDConf.3.1	
$BW_{channel}$	MHz	1, 2	100: $N_{PRB,c}$ = 24	
OCNG patterns defined in A.3.2.1.1		1, 2	OP. 3	
SSB configuration		1, 2	SSB.3 FR2	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	
b1-ThresholdNR UE power class 3	dBm/SCS	1, 2	-112	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
$\hat{E}_s$	dBm/SCS	1, 2	- Infinity	-80.6+TT
SS B_RP Note 3	dBm/SCS	1, 2	-Infinity	-80.6+TT
$\hat{E}_s / I_{ot}$ BB Note 6	dB	1, 2	-Infinity	8.3+TT
Io Note3	dBm/95.04 MHz	1, 2	-Infinity	-56.0+TT
Propagation Condition		1, 2	AWGN	

NOTE 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Void
NOTE 3: SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Void
NOTE 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
NOTE 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1 dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

In the test, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2, where D1 = 12.8 s for UE power class 3.

During the test, the interruption ratio (number of interrupted subframes over the number of total subframes) in LTE PCell shall be less than 1.25 %, and each interruption shall not exceed 1 subframe.

The UE shall not send event triggered measurement reports, if the reporting criteria are not fulfilled.

In the test, the UE is not required to report SSB time index.

The rate of correct events observed during repeated tests shall be at least 90 % with the confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

8.5 Measurement performance requirements

8.5.1 SFTD measurement accuracy

8.5.1.0 Minimum conformance requirements

8.5.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements

The SFN and frame timing difference (SFTD) is measured between PCell and NR cell for inter-RAT SFTD. The inter-RAT SFTD measurement can only be configured for E-UTRA - NR band combinations that are supported by the UE.

The accuracy requirements in Table 8.5.1.0.1-3 are applicable under the following conditions:

For PCell SFN and frame timing measurement:

- Cell specific reference signals are transmitted either from one, two or four antenna ports.
- Conditions defined in TS 36.101 clause 7.3 for reference sensitivity are fulfilled.
- No changes to the uplink transmission timing are applied during the measurement period.
- $RSRP|_{dBm}$ according to TS 36.133 Annex B.3.5 for a corresponding Band.
- Io range defined in Table 8.5.1.0.1-1.

Table 8.5.1.0.1-1: PCell Io range conditions for SFTD measurement accuracy

Parameter	Io [Note 1] range		
	E-UTRA operating band groups [Note 4, 5]	Minimum Io	Maximum Io
		dBm/15kHz [Note 2, 3]	$dBm/BW_{Channel}$
Conditions	FDD_A, TDD_A	-121	-50
	FDD_C, TDD_C	-120	-50
	FDD_D	-119.5	-50
	FDD_E, TDD_E	-119	-50
	FDD_F	-118.5	-50
	FDD_G	-118	-50
	FDD_H	-117.5	-50
	FDD_N	-114.5	-50

NOTE 1: When in dBm/15kHz, the minimum Io condition is expressed as the average Io per RE over all REs in that symbol. Io may be different in different symbols within a subframe.
NOTE 2: The condition level is increased by $\Delta>0$, when applicable, as described in clause B.4.2 and B.4.3.
NOTE 3: The condition level is increased by MSD as defined in clause 7.3B in TS 38.101-3 [54], if applicable depending on E-UTRA - NR band combination.
NOTE 4: E-UTRA operating band groups are as defined in clause 3.5.
NOTE 5: Only E-UTRA bands within EN-DC band combinations as specified in clause 5.5B in TS 38.101-3 [54] are applicable.

For NR PSCell, or NR cell SFN and frame timing measurement in FR1:

- Conditions defined in TS 38.101-1 clause 7.3 for reference sensitivity are fulfilled.
- Io range defined in Table 8.5.1.0.1-2.

Table 8.5.1.0.1-2: NR PSCell, or NR cell Io range conditions for SFTD measurement accuracy in FR1

Parameter	Io [Note 1] range		
	NR operating band groups [Note 4, 5]	Minimum Io [Note 2, 3]	Maximum Io
		dBm/ SCS_{SSB}	$dBm/BW_{Channel}$

		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-121	-118	-50
	NR_FDD_FR1_B	-120.5	-117.5	-50
	NR_TDD_FR1_C	-120	-117	-50
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-50
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-50
	NR_FDD_FR1_G	-118	-115	-50
	NR_FDD_FR1_H	-117.5	-114.5	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The condition level is increased by $\Delta R_{IB,c}$ as defined in clause 7.3B in TS 38.101-3 [54], depending on E-UTRA - NR band combination.
NOTE 3: The condition level is increased by MSD as defined in clause 7.3B in TS 38.101-3 [54], if applicable depending on E-UTRA - NR band combination.
NOTE 4: NR operating band groups are as defined in clause 3.5.
NOTE 5: Only NR bands within EN-DC band combinations as specified in clause 5.5B in TS 38.101-3 [54] are applicable.

Table 8.5.1.0.1-3: SFTD measurement accuracy

Accuracy	Conditions	
	Ês/Iot	Frequency range
Ts [Note 1]	dB	
40	≥ -3 dB	FR1

NOTE 1: Ts is the basic timing unit defined in TS 36.211 [16].
NOTE 2: The parameter Ês/Iot is the minimum Ês/Iot of the pair of cells to which the requirement applies.

8.5.1.1 E-UTRA - NR FR1 SFTD measurement accuracy

8.5.1.1.1 Test purpose

The purpose of this test is to verify that the SFTD measurement accuracy is within the specified limits and to verify the requirements as specified in clause 9.1.27 in TS 36.133 [23] for inter-RAT FR1 SFTD measurements.

8.5.1.1.2 Test applicability

This test applies to all types of NR UE from Release 15 onwards and support inter-RAT NR SFTD measurements.

8.5.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.5.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.8.5.1.1.

8.5.1.1.4 Test description

Two cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell and Cell 2 is the inter-RAT NR FR1 neighbour cell.

8.5.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.5.1.1.4.1-1.

Table 8.5.1.1.4.1-1: Supported test configurations for E-UTRA - NR FR1 SFTD measurement accuracy

Configuration	Description
8.5.1.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
8.5.1.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
8.5.1.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
8.5.1.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD

8.5.1.1-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
8.5.1.1-6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 8.5.1.1.4.1-2.

Table 8.5.1.1.4.1-2: Initial conditions for E-UTRA - NR FR1 SFTD measurement accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 8.4.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.5.1.1.4.1-3.
2. Message contents are defined in clause 8.5.1.1.4.3.
3. There are two carriers and two cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.
4. The SFTD between PCell and NR neighbour cell shall be set to one of the conditions in Table 8.5.1.1.5-3. For negative Frame boundary offset, it can be achieved delaying NR neighbour cell in regards to PCell OR advancing PCell in regards to NR neighbour cell. For positive Frame boundary offset, it can be achieved delaying PCell in regards to NR neighbour cell OR advancing NR neighbour cell in regards to PCell.

8.5.1.1.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 8.5.1.1.5-1 and Table 8.5.1.1.5-3 as appropriate. (Condition = 3)
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit a *MeasurementReport* message triggered by SFTD measurement.
6. The SS shall check the reported values of SFN offset and frame boundary offset in the *MeasurementReport*. The SFN offset value and frame boundary offset value between E-UTRA Cell 1 and Cell 2 reported by the UE is compared to the expected SFN offset value and frame boundary offset, respectively. The number of failed iterations is increased by one, if

   - The value of *sfn-OffsetResult* is different with the expected SFN offset value, or
   - The value of *frameBoundaryOffsetResult*is outside the range given in Table 8.5.1.1.5-5, or
   - The UE fails to report the measurement value for Cell 2.

   Otherwise the number of successful iterations is increased by one.
7. After the RRC connection release, the SS:

   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or

- switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

8. Repeat steps 1-7 until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8.5.1.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.5.1.1.4.3-1: Common Exception messages for E-UTRA - NR FR1 SFTD measurement accuracy

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and SFTDTable H.3.4-4 with Condition INTER-RAT NR, SFTD and GAPLESS
Specific message contents exceptions for Test Configuration 8.5.1.1-1 and 8.5.1.1-4	Table H.3.4-6 with Condition SSB.1 FR1 and SMTC.1
Specific message contents exceptions for Test Configuration 8.5.1.1-2 and 8.5.1.1-5	Table H.3.4-6 with Condition SSB.1 FR1 and SMTC.1
Specific message contents exceptions for Test Configuration 8.5.1.1-3 and 8.5.1.1-6	Table H.3.4-6 with Condition SSB.2 FR1 and SMTC.1

8.5.1.1.5 Test requirement

Table 8.5.1.1.5-1 and 8.5.1.1.5-2 defines the primary level settings including test tolerances for E-UTRA - NR FR1 SFTD measurement accuracy.

The SFN offset and frame boundary offset between E-UTRA PCell and the inter-RAT neighbour cell shall be set to one of the configurations in Table 8.5.1.1.5-3. The reported SFTD accuracy shall fulfil the accuracy requirements in Table 8.5.1.1.5-4. The SFN offset in reported SFTD shall match the values in Table 8.5.1.1.5-3 and the frame boundary offset in reported SFTD shall be within the range given in Table 8.5.1.1.5-5.

Table 8.5.1.1.5-1: E-UTRA cell specific test parameters for E-UTRA - NR FR1 SFTD measurement accuracy

Parameter	Unit	Test 1
E-UTRA RF Channel Number		1
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	

PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA Note3	dB	
OCNG_RB Note3	dB	
N_{oc} Note4	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	-2.2
$\hat{E}_s/I_{ot}$	dB	-2.2
RSRP Note5	dBm/15 kHz	-106.2
SCH_RP Note5	dBm/15 kHz	-106.2
Io Note5	dBm/Ch BW	-74.17 +10log ($N_{RB,c}$ /50)
Propagation Condition		AWGN
Antenna Configuration		1x2

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
NOTE 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 5: Es/Iot, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 8.5.1.1.5-2: NR cell specific test parameters for E-UTRA - NR FR1 SFTD measurement accuracy

Parameter	Config	Unit	Test 1
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52
	2,5		10: $N_{RB,c}$ = 52
	3,6		40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
RMC CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1
	2,5		SSB.1 FR1
	3,6		SSB.2 FR1
SMTC configuration	1~6		SMTC.1
DL BWP configuration	1~6		DLBWP.1.1
UL BWP configuration	1~6		ULBWP.1.1
OCNG Patterns	1~6		OP.1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

Parameter		Config	Unit	Test 1
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A	1~6	dBm/15kHz	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A	1,2,4,5	dBm/SSB SCS	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A	3,6		-101
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
$\hat{E}_s / I_{ot}$		1~6	dB	-2.7
$\hat{E}_s / N_{oc}$		1~6	dB	-2.7
SS-RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A	1,2,4,5	dBm/SCS	-106.7
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A	3,6		-103.7
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A	1,2,4,5	dBm/9.36 MHz	-74.18
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			

Parameter		Config	Unit	Test 1
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A	3,6	dBm/38.16 MHz	-68.08
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Propagation condition		1~6		AWGN
Antenna configuration		1~6		1x2
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

Table 8.5.1.1.5-3: Timing offsets for E-UTRA - NR FR1 SFTD measurement accuracy

Condition	SFN offset between PCell and PSCell	Frame boundary offset between PCell and PSCell (Ts)
1	100	-122000
2	300	-60540
3	500	1000
4	700	62540
5	900	124000

Table 8.5.1.1.5-4: SFTD measurement accuracy

Accuracy	Conditions	
	Ês/Iot	Frequency range
Ts Note 1	dB	
40	≥ -3 dB	FR1
NOTE 1: Ts is the basic timing unit defined in TS 36.211 [24]. NOTE 2: The parameter Ês/Iot is the minimum Ês/Iot of the pair of cells to which the requirement applies.		

Table 8.5.1.1.5-5: E-UTRA - NR FR1 SFTD measurement accuracy requirements for the value of frameBoundaryOffsetResult in reported SFTD

Normal and Extreme Conditions	frameBoundaryOffsetResult				
	Condition 1	Condition 2	Condition 3	Condition 4	Condition 5
Lowest reported value	-24408	-12116	192	12500	24792
Highest reported value	-24392	-12100	208	12516	24808

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

8.5.2 Inter-RAT measurement accuracy

8.5.2.1 SS-RSRP

8.5.2.1.0 Minimum conformance requirements

The measurement period of NR SS-RSRP measurements in RRC_CONNECTED state is specified in TS 36.133 [23] Clause 8.1.2.4.21 for UE with FDD PCell not configured with E-UTRA-NR Dual Connectivity operation. The measurement period of NR SS-RSRP measurements in RRC_CONNECTED state is specified in TS 36.133 [23] Clause 8.1.2.4.22 for UE with TDD PCell not configured with E-UTRA-NR Dual Connectivity operation.

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 36.133 [23] clause 9.11.1.

8.5.2.1.0.1 Inter-RAT E-UTRA - NR FR1 SS-RSRP measurement accuracy requirements

The accuracy requirements of NR SS-RSRP measurements in FR1 and the corresponding side conditions shall be the same as the inter-frequency SS-RSRP absolute accuracy requirements in clause 4.7.1.0.3.

8.5.2.1.0.2 Inter-RAT E-UTRA - NR FR2 SS-RSRP minimum conformance requirements

The accuracy requirements of NR SS-RSRP measurements in FR2 and the corresponding side conditions shall be the same as the inter-frequency SS-RSRP absolute accuracy requirements in clause 5.7.1.0.2.

8.5.2.1.1 SS-RSRP with NR FR1 target cell

8.5.2.1.1.1 E-UTRA SS-RSRP absolute measurement accuracy of a NR FR1 neighbour cell

8.5.2.1.1.1.1 Test purpose

The purpose of this test is to verify that the inter-RAT SS-RSRP absolute measurement accuracy is within the specified limits for all bands, when the serving cell is E-UTRA and the target cell is NR FR1.

8.5.2.1.1.1.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards and capable of NR measurements.

8.5.2.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.5.2.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.8.5.2.1.1.1.

8.5.2.1.1.1.4 Test description

Two cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell and Cell 2 is the inter-RAT NR FR1 neighbour cell.

8.5.2.1.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.5.2.1.1.1.4.1-1.

Table 8.5.2.1.1.1.4.1-1: Supported test configurations

Configuration	Description
8.5.2.1.1.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
8.5.2.1.1.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
8.5.2.1.1.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD

8.5.2.1.1.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
8.5.2.1.1.1-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
8.5.2.1.1.1-6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 8.5.2.1.1.1.4.1-2.

Table 8.5.2.1.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the selected test configuration.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part 2Rx	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.7.3	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	Without faders		

1. The general test parameter settings are set up according to Table 8.5.2.1.1.1.4.1-3.
2. Message contents are defined in clause 8.5.2.1.1.1.4.3.
3. There are two carriers and two cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

8.5.2.1.1.1.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 8.5.2.1.1.1.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport. The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP. If the value is outside the limits in clause 8.5.2.1.1.1.5 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 8.5.2.1.1.1.5-1 as appropriate and repeat steps 5-7.

8.5.2.1.1.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.5.2.1.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 Table 4.6.6-2B in TS 36.508 [25]

Table 8.5.2.1.1.1.4.3-2: ReportConfigInterRAT-DEFAULT(Periodical)

Derivation Path: 36.508 [25] Table 4.6.6-9			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
ReportQuantityNR-r15 SEQUENCE {	PRESENT		
ss-rsrp	true		
}			
}			
}			
}			

8.5.2.1.1.1.5 Test requirement

Table 8.5.2.1.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 8.5.2.1.1.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 8.5.2.1.1.1.5-2 for test configurations 1, 2, 4 and 5, and the corresponding absolute accuracy requirements in Table 8.5.2.1.1.1.5-3 for test configurations 3 and 6.

Table 8.5.2.1.1.1.5-1: SS-RSRP inter-RAT test parameters

Parameter			**Unit**	**Test 1**		**Test 2**	
				Cell 2		**Cell 2**	
SSB ARFCN				freq1		freq1	
Duplex mode		Config 1,4		FDD			
		Config 2,3,5,6		TDD			
TDD configuration		Config 1,4		Not Applicable			
		Config 2,5		TDDConf.1.1			
		Config 3,6		TDDConf.2.1			
Downlink initial BWP configuration				DLBWP.0.1			
Uplink initial BWP configuration				ULBWP.0.1			
DRX Cycle configuration			ms	Not Applicable			
PDSCH Reference measurement channel		Config 1,4		-		-	
		Config 2,5					
		Config 3,6					
RMSI CORESET Reference Channel		Config 1,4		-		-	
		Config 2,5					
		Config 3,6					
Dedicated CORESET Reference Channel		Config 1,4		-		-	
		Config 2,5					
		Config 3,6					
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
SMTC configuration				SMTC.1			
SSB configuration		Config 1,2,4,5		SSB.1 FR1			
		Config 3,6		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15			
		Config 3,6		30			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	Config 1,2,4,5	Depending on band group	dBm/15k Hz	-94.65		-117 + Δ_{BG_offset}	

Parameter			Unit	Test 1	Test 2
				Cell 2	Cell 2
	Config 3,6	Depending on band group	dBm/15kHz	-96.00	-117 + Δ_{BG_offset}
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-94.65	Same as Noc for 15kHz
	Config 3,6	Depending on band group		-93.00	-114 + Δ_{BG_offset}
$\hat{E}_s / I_{ot}$			dB	10	-3.2
$\hat{E}_s / N_{oc}$			dB	10	-3.2
SS-RSRP Note3	Config 1,2,4,5	Depending on band group	dBm/SCS	-84.65	-120.2 + Δ_{BG_offset}
	Config 3,6	Depending on band group		-83.00	-117.2 + Δ_{BG_offset}
Io Note3	Config 1,2,4,5	Depending on band group	dBm/9.36MHz	-56.28	-87.35 + Δ_{BG_offset}
	Config 3,6	Depending on band group	dBm/38.16MHz	-51.53	-81.25 + Δ_{BG_offset}
Propagation condition			-	AWGN	
Antenna configuration			-	1x2	

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: NR operating band groups are as defined in clause 3.5.2.
NOTE 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 8.5.2.1.1.1.5-2: SS-RSRP Inter RAT absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	62	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	30
		Bands NR_FDD_FR1_B	31
		Bands NR_TDD_FR1_C	31
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	32
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	32
		Bands NR_FDD_FR1_F	33
		Bands NR_FDD_FR1_G	33
		Bands NR_FDD_FR1_H	34
Highest reported value (Cell 2)	82	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	43
		Bands NR_FDD_FR1_B	43
		Bands NR_TDD_FR1_C	44
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	44
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	45
		Bands NR_FDD_FR1_F	45
		Bands NR_FDD_FR1_G	46
		Bands NR_FDD_FR1_H	46
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	59	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	26

		Bands NR_FDD_FR1_B	26
		Bands NR_TDD_FR1_C	27
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	27
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	28
		Bands NR_FDD_FR1_F	28
		Bands NR_FDD_FR1_G	29
		Bands NR_FDD_FR1_H	29
Highest reported value (Cell 2)	85	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	47
		Bands NR_FDD_FR1_B	48
		Bands NR_TDD_FR1_C	48
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	49
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	49
		Bands NR_FDD_FR1_F	50
		Bands NR_FDD_FR1_G	50
		Bands NR_FDD_FR1_H	51
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 8.5.2.1.1.1.5-3: SS-RSRP Inter RAT absolute accuracy requirements for the reported values for test configurations 3 and 6

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	64	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	33
		Bands NR_FDD_FR1_B	34
		Bands NR_TDD_FR1_C	34
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	35
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	35
		Bands NR_FDD_FR1_F	36
		Bands NR_FDD_FR1_G	36
		Bands NR_FDD_FR1_H	37
Highest reported value (Cell 2)	83	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	46
		Bands NR_FDD_FR1_B	46
		Bands NR_TDD_FR1_C	47
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	47
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	48
		Bands NR_FDD_FR1_F	48
		Bands NR_FDD_FR1_G	49
		Bands NR_FDD_FR1_H	49
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	61	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	29
		Bands NR_FDD_FR1_B	29
		Bands NR_TDD_FR1_C	30
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	30
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	31
		Bands NR_FDD_FR1_F	31
		Bands NR_FDD_FR1_G	32
		Bands NR_FDD_FR1_H	32
Highest reported value (Cell 2)	86	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	50
		Bands NR_FDD_FR1_B	51

Normal Conditions	Test 1 All bands	Test 2	
		Bands NR_TDD_FR1_C	51
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	52
		Bands NR_FDD_FR1_E, NR_TDD_FR1_E	52
		Bands NR_FDD_FR1_F	53
		Bands NR_FDD_FR1_G	53
		Bands NR_FDD_FR1_H	54
NOTE: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

8.5.2.1.1.2 Void

8.5.2.1.2 E-UTRA SS-RSRP absolute measurement accuracy of a NR FR2 neighbour cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

8.5.2.1.2.1 Test purpose

The purpose of this test is to verify that the inter-RAT SS-RSRP measurement accuracy is within the specified limits for all bands, when the serving cell is E-UTRA and the target cell is NR FR2.

8.5.2.1.2.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards and capable of NR FR2 measurements.

8.5.2.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.5.2.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.8.5.2.1.2.

8.5.2.1.2.4 Test description

Two cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell and Cell 2 is the inter-RAT NR FR2 neighbour cell.

8.5.2.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.5.2.1.2.4.1-1.

Table 8.5.2.1.2.4.1-1: Supported test configurations

Configuration	Description
8.5.2.1.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
8.5.2.1.2-2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD

NOTE: The UE is only required to be tested in one of the supported test configurations

Configure the test equipment and the DUT according to the parameters in Table 8.5.2.1.2.4.1-2.

Table 8.5.2.1.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-2 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	UE Part: A.3.4.1.1	
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 8.5.2.1.2.4.1-3.
2. Message contents are defined in clause 8.5.2.1.2.4.3.
3. There are two carriers and two cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

8.5.2.1.2.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 8.5.2.1.2.5-1 and Table 8.5.2.1.2.5-2 as appropriate. The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1 to configure inter-RAT NR neighbour cell periodical measurements.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport. The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP. If the value is outside the limits in clause 8.5.2.1.2.5 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Tables 8.5.2.1.2.5-1 and 8.5.2.1.2.5-2 as appropriate and repeat steps 5-7.

8.5.2.1.2.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.5.2.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.4-7 Table 4.6.6-2B in TS 36.508 [25]

Table 8.5.2.1.2.4.3-2: ReportConfigInterRAT-DEFAULT(Periodical)

Derivation Path: 36.508 [25] Table 4.6.6-9			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
ReportQuantityNR-r15 SEQUENCE {	PRESENT		
rsrp	true		
}			
}			
}			
}			

8.5.2.1.2.5 Test requirement

Table 8.5.2.1.2.5-1 defines the general test parameters and Table 8.5.2.1.2.5-2 defines the primary level OTA settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 8.5.2.1.2.5-2 shall meet the corresponding absolute accuracy requirements in Table 8.5.2.1.2.5-3

Table 8.5.2.1.2.5-1: SS-RSRP Inter-RAT general test parameters

Parameter	**Unit**	**Test 1**	**Test 2**
		Cell 2	**Cell 2**
SSB ARFCN		Freq1	freq1
Duplex mode		TDD	TDD
TDD configuration		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Downlink initial BWP configuration		DLBWP.0.1	
Uplink initial BWP configuration		ULBWP.0.1	
DRX cycle configuration	ms	Not applicable	
PDSCH Reference measurement channel		-	-
RMSI CORESET Reference Channel		-	-
OCNG Patterns		OP.1	OP.1
SMTC configuration		SMTC.1	SMTC.1
SSB configuration		SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS[Note 1]			
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Void. NOTE 3: Void. NOTE 4: Void.			

Table 8.5.2.1.2.5-2: SS-RSRP Inter-RAT OTA related test parameters

Parameter	**Unit**	**Test 1**	**Test 2**
		Cell 2	**Cell 2**

Angle of arrival configuration		Setup 1 according to A.9.1	Setup 1 according to A.9.1
Assumption for UE beams Note 9		Rough	Rough
N_{oc} Note1	dBm/15kHz Note4	-105.1	N/A
N_{oc} Note1	dBm/SCS Note4	-96.07	N/A
$\hat{E}_s / N_{oc}$	dB	11	N/A
E_s	dBm/SCS Note 4		(Table B.2.3-2 of TS 38.133 [6] Rx Beam Peak +6.65dB)
SSB_RP Note2	dBm/SCS Note4	-85.07	(Table B.2.3-2 of TS 38.133 [6] Rx Beam Peak +6.65dB)
$\hat{E}_s / I_{ot}$ BB Note 7	dB	9.95	1.84
Io Note2	dBm/95.04 MHz Note4	-55.75	(Table B.2.3-2 of TS 38.133 [6] Rx Beam Peak +35.65dB)

NOTE 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

NOTE 3: Void

NOTE 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

NOTE 5: Void

NOTE 6: Void

NOTE 7: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [3] Table 6.2.1.3-4.

NOTE 8: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 8.5.2.1.2.5-3: evaluation limits for the reported values

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	48	n257, n258, n261	29
		n260	32
		n259	33
Highest reported value (Cell 2)	105	n257, n258, n261	87
		n260	89
		n259	90
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	45	n257, n258, n261	26
		n260	29
		n259	30
Highest reported value (Cell 2)	108	n257, n258, n261	90
		n260	92
		n259	93

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

8.5.2.2 SS-RSRQ

8.5.2.2.0 Minimum conformance requirements

The measurement period of NR SS-RSRQ measurements is the same as the measurement period of NR SS-RSRP measurements defined in clause 8.5.2.1.0.

The reporting range of SS-RSRQ is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.2.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 36.133 [23] clause 9.11.2.

8.5.2.2.0.1 Inter-RAT E-UTRA - NR FR1 SS-RSRQ minimum conformance requirements

The accuracy requirements of NR SS-RSRQ measurements in FR1 and the corresponding side conditions shall be the same as the inter-frequency SS-RSRQ absolute accuracy requirements in clause 4.7.2.0.2.

8.5.2.2.0.2 Inter-RAT E-UTRA - NR FR2 SS-RSRQ minimum conformance requirements

The accuracy requirements of NR SS-RSRP measurements in FR2 and the corresponding side conditions shall be the same as the inter-frequency SS-RSRP absolute accuracy requirements in clause 5.7.2.0.2.

8.5.2.2.1 E-UTRA SS-RSRQ absolute measurement accuracy of a NR FR1 neighbour cell

8.5.2.2.1.1 Test purpose

The purpose of this test is to verify that the inter-RAT SS-RSRQ measurement accuracy is within the specified limits for all bands, when the serving cell is E-UTRA and the target cell is NR FR1.

8.5.2.2.1.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards and capable of NR measurements.

8.5.2.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.5.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.8.5.2.2.1.

8.5.2.2.1.4 Test description

Two cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell and Cell 2 is the inter-RAT NR FR1 neighbour cell.

8.5.2.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.5.2.2.1.4.1-1.

Table 8.5.2.2.1.4.1-1: Supported test configurations

Configuration	Description
8.5.2.2.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
8.5.2.2.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
8.5.2.2.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
8.5.2.2.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
8.5.2.2.1-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
8.5.2.2.1-6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 8.5.2.2.1.4.1-2.

Table 8.5.2.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the selected test configuration.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part 2Rx	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.7.3	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.5.2.2.1.4.1-3.
2. Message contents are defined in clause 8.5.2.2.1.4.3.
3. There are two carriers and two cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

8.5.2.2.1.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 8.5.2.2.1.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport. The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in clause 8.5.2.2.1.5 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 8.5.2.2.1.5-1 as appropriate and repeat steps 5-7.

8.5.2.2.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.5.2.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 Table 4.6.6-2B in TS 36.508 [25]

Table 8.5.2.2.1.4.3-2: ReportConfigInterRAT-DEFAULT(Periodical)

Derivation Path: 36.508 [25] Table 4.6.6-9			
Information Element	**Value/remark**	**Comment**	**Condition**

ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
ReportQuantityNR-r15 SEQUENCE {	PRESENT		
ss-rsrq	true		
}			
}			
}			
}			

8.5.2.2.1.5 Test requirement

Table 8.5.2.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 8.5.2.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 8.5.2.2.1.5-2.

Table 8.5.2.2.1.5-1: SS-RSRQ inter-RAT test parameters

Parameter			Unit	Test 1	Test 2	Test 3
				Cell 2	Cell 2	Cell 2
SSB ARFCN				freq1	freq1	freq1
Duplex mode		Config 1,4		FDD		
		Config 2,3,5,6		TDD		
TDD configuration		Config 1,4		Not Applicable		
		Config 2,5		TDDConf.1.1		
		Config 3,6		TDDConf.2.1		
Downlink initial BWP configuration				DLBWP.0.1		
Uplink initial BWP configuration				ULBWP.0.1		
DRX Cycle configuration			ms	Not Applicable		
PDSCH Reference measurement channel		Config 1,4		-	-	-
		Config 2,5				
		Config 3,6				
RMSI CORESET Reference Channel		Config 1,4		-	-	-
		Config 2,5				
		Config 3,6				
Dedicated CORESET Reference Channel		Config 1,4		-	-	-
		Config 2,5				
		Config 3,6				
OCNG Patterns				OP.1		
SS-RSSI-Measurement				Not Applicable		
SMTC configuration				SMTC.1		
SSB configuration		Config 1,2,4,5		SSB.1 FR1		
		Config 3,6		SSB.2 FR1		
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15		
		Config 3,6		30		
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	Depending on band group	dBm/15kHz	-81.68	-106	-116 + Δ_{BG_offset}
	Config 3,6			-87.80	-113	Same as Noc for 15kHz for Config 1,2,4,5
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-81.68	-106	Same as Noc for 15kHz
	Config 3,6	Depending on band group		-84.80	-110	-113 + Δ_{BG_offset}
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75

Parameter			Unit	Test 1	Test 2	Test 3
				Cell 2	Cell 2	Cell 2
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	-1.75
SS-RSRP Note3	Config 1,2,4,5	Depending on band group	dBm/SCS	-83.43	-107.75	-117.75 + Δ_{BG_offset}
	Config 3,6	Depending on band group		-86.55	-111.75	-114.75 + Δ_{BG_offset}
SS-RSRQ Note3			dB	-14.77	-14.76	-14.76
Io Note3	Config 1,2,4,5	Depending on band group	dBm/ 9.36MHz	-50	-75.83	-85.83 + Δ_{BG_offset}
	Config 3,6	Depending on band group	dBm/ 38.16MHz	-50	-76.73	-79.73 + Δ_{BG_offset}
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: NR operating band groups are as defined in clause 3.5.2.
NOTE 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 8.5.2.2.1.5-2: SS-RSRQ accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_51	SS-RSRQ_51	SS-RSRQ_51
Highest reported value (Cell 2)	SS-RSRQ_63	SS-RSRQ_63	SS-RSRQ_63
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_48	SS-RSRQ_48	SS-RSRQ_48
Highest reported value (Cell 2)	SS-RSRQ_66	SS-RSRQ_66	SS-RSRQ_66

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

8.5.2.2.2 E-UTRA SS-RSRQ absolute measurement accuracy of a NR FR2 neighbour cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

8.5.2.2.2.1 Test purpose

The purpose of this test is to verify that the inter-RAT SS-RSRQ measurement accuracy is within the specified limits for all bands, when the serving cell is E-UTRA and the target cell is NR FR2.

8.5.2.2.2.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards and capable of NR FR2 measurements.

8.5.2.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.5.2.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.8.5.2.2.2.

8.5.2.2.2.4 Test description

Two cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell and Cell 2 is the inter-RAT NR FR2 neighbour cell.

8.5.2.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.5.2.2.2.4.1-1.

Table 8.5.2.2.2.4.1-1: Supported test configurations

Configuration	Description
8.5.2.2.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
8.5.2.2.2-2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 8.5.2.2.2.4.1-2.

Table 8.5.2.2.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-2 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	UE Part: A.3.4.1.1	
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 8.5.2.2.2.4.1-3.
2. Message contents are defined in clause 8.5.2.2.2.4.3.
3. There are two carriers and two cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

8.5.2.2.2.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 8.5.2.2.2.5-1 and Table 8.5.2.2.2.5-2 as appropriate. The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1 to configure inter-RAT NR neighbour cell periodical measurements.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport. The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in clause 8.5.2.2.2.5 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Tables 8.5.2.2.2.5-1 and 8.5.2.2.2.5-2 as appropriate and repeat steps 5-7.

8.5.2.2.2.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.5.2.2.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 Table 4.6.6-2B in TS 36.508 [25]

Table 8.5.2.2.2.4.3-2: ReportConfigInterRAT-DEFAULT(Periodical)

Derivation Path: 36.508 [25] Table 4.6.6-9			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
ReportQuantityNR-r15 SEQUENCE {	PRESENT		
rsrq	true		
}			
}			
}			
}			

8.5.2.2.2.5 Test requirement

Table 8.5.2.2.2.5-1 defines the general test parameters and Table 8.5.2.2.2.5-2 defines the primary level OTA settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 8.5.2.2.2.5-2 shall meet the corresponding absolute accuracy requirements in Table 8.5.2.2.2.5-3

Table 8.5.2.2.2.5-1: SS-RSRQ Inter-RAT general test parameters

Parameter	Unit	Test 1	Test 2
		Cell 2	Cell 2
SSB ARFCN		Freq1	freq1
Duplex mode		TDD	TDD
TDD configuration		TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Downlink initial BWP configuration		DLBWP.0.1	
Uplink initial BWP configuration		ULBWP.0.1	
DRX cycle configuration	ms	Not applicable	

PDSCH Reference measurement channel		-	-
RMSI CORESET Reference Channel		-	-
OCNG Patterns		OP.1	OP.1
SMTC configuration		SMTC.1	SMTC.1
SSB configuration		SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-SINR, SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 8.5.2.2.2.5-2: SS-RSRQ Inter-RAT OTA related test parameters

Parameter	Unit	Test 1	Test 2
		Cell 2	Cell 2
Angle of arrival configuration		Setup 1	Setup 1
Assumption for UE beams Note 10		Rough	Rough
N_{oc} Note1	dBm/15kHz Note4	-105	(Table B.2.3-2 of TS 38.133 [6] Rx Beam Peak -5dB) (Note 7)
N_{oc} Note1	dBm/SCS Note4	-95.97	(Table B.2.3-2 of TS 38.133 [6] Rx Beam Peak +4dB) (Note 7)
$\hat{E}_s / N_{oc}$	dB	-0.5	3.55
SSB_RP Note2	dBm/SCS Note4	-96.47	(Table B.2.3-2 of TS 38.133 [6] Rx Beam Peak +7.55dB) (Note 8)
SS-RSRQ Note2	dB	-14.06	-12.38
$\hat{E}_s / I_{ot}$ Note2	dB	-0.5	3.55
Io Note2	dBm/95.04 MHz Note4	-64.21	(Table B.2.3-2 of TS 38.133 [6] Rx Beam Peak +43.16dB) (Note 9)

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SSB_RP, SS-RSRQ, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: Void
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.

NOTE 5: Void
NOTE 6: Void
NOTE 7: N_{oc} for SCS 15kHz is applied at $-10\log_{10}(8)+4$dB above the minimum level specified in Table B.2.3-2 of TS 38.133 [6] for beam peak. N_{oc} for SCS 120kHz is applied at 4dB above the minimum level specified in Table B.2.3-2 for beam peak.
NOTE 8: SSB_RP is applied at 2.25dB above the minimum level specified in Table B.2.3-2 of TS 38.133 [6] for beam peak.
NOTE 9: Io is applied at $10\log_{10}(792)+6.22$dB above the minimum level specified in Table B.2.3-2 of TS 38.133 [6] for beam peak.
NOTE 10: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation.

Table 8.5.2.2.2.5-3: evaluation limits for the reported values

Normal Conditions	Test 1	Test 2
Lowest reported value (Cell 2)	23	26
Highest reported value (Cell 2)	95	98
Extreme Conditions	**Test 1**	**Test 2**
Lowest reported value (Cell 2)	20	23
Highest reported value (Cell 2)	98	101

8.5.2.3 SS-SINR

8.5.2.3.0 Minimum conformance requirements

The measurement period of NR SS-SINR measurements is the same as the measurement period of NR SS-RSRP measurements defined in clause 8.5.2.1.0.

The reporting range of SS-SINR and CSI-SINR is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 4.7.3.0.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

The normative reference for this requirement is TS 36.133 [23] clause 9.11.3.

8.5.2.3.0.1 Inter-RAT E-UTRA - NR FR1 SS-SINR minimum conformance requirements

The accuracy requirements of NR SS-SINR measurements in FR1 and the corresponding side conditions shall be the same as the inter-frequency SS-SINR absolute accuracy requirements in clause 4.7.3.0.2.

8.5.2.3.0.2 Inter-RAT E-UTRA - NR FR2 SS-SINR minimum conformance requirements

The accuracy requirements of NR SS-SINR measurements in FR2 and the corresponding side conditions shall be the same as the inter-frequency SS-SINR absolute accuracy requirements in clause 5.7.3.0.2.

8.5.2.3.1 E-UTRA SS-SINR absolute measurement accuracy of a NR FR1 neighbour cell

8.5.2.3.1.1 Test purpose

The purpose of this test is to verify that the inter-RAT SS-SINR measurement accuracy is within the specified limits for all bands, when the serving cell is E-UTRA and the target cell is NR FR1.

8.5.2.3.1.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards supporting ss-SINR-Meas and capable of NR measurements.

8.5.2.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.5.2.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.8.5.2.3.1.

8.5.2.3.1.4 Test description

Two cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell and Cell 2 is the inter-RAT NR FR1 neighbour cell.

8.5.2.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.5.2.3.1.4.1-1.

Table 8.5.2.3.1.4.1-1: Supported test configurations

Configuration	Description
8.5.2.3.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
8.5.2.3.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
8.5.2.3.1-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
8.5.2.3.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
8.5.2.3.1-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
8.5.2.3.1-6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 8.5.2.3.1.4.1-2.

Table 8.5.2.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the selected test configuration.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part 2Rx	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.7.3	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 8.5.2.3.1.4.1-3.
2. Message contents are defined in clause 8.5.2.3.1.4.3.
3. There are two carriers and two cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

8.5.2.3.1.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 8.5.2.3.1.5-1 as appropriate.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic MeasurementReport. The SS- SINR value of Cell 2 reported by the UE is compared to the expected SS- SINR. If the value is outside the limits in clause 8.5.2.3.1.5 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 8.5.2.3.1.5-1 as appropriate and repeat steps 5-7.

8.5.2.3.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.5.2.3.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 Table 4.6.6-2B in TS 36.508 [25]

Table 8.5.2.3.1.4.3-2: ReportConfigInterRAT-DEFAULT(Periodical)

Derivation Path: 36.508 [25] Table 4.6.6-9			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
ReportQuantityNR-r15 SEQUENCE {	PRESENT		
ss-sinr	true		
}			
}			
}			
}			

8.5.2.3.1.5 Test requirement

Table 8.5.2.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 8.5.2.3.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 8.5.2.3.1.5-2.

Table 8.5.2.3.1.5-1: SS-SINR inter-RAT test parameters

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 2	Cell 2	Cell 2
SSB ARFCN			freq1	freq1	freq1
Duplex mode	Config 1,4		FDD		
	Config 2,3,5,6		TDD		
TDD configuration	Config 1,4		Not Applicable		
	Config 2,5		TDDConf.1.1		
	Config 3,6		TDDConf.2.1		
Downlink initial BWP configuration			DLBWP.0.1		
Uplink initial BWP configuration			ULBWP.0.1		
DRX Cycle configuration		ms	Not Applicable		
PDSCH Reference measurement channel	Config 1,4		-	-	-
	Config 2,5				
	Config 3,6				
RMSI CORESET Reference Channel	Config 1,4		-	-	-
	Config 2,5				
	Config 3,6				
Dedicated CORESET Reference Channel	Config 1,4		-	-	-
	Config 2,5				
	Config 3,6				
OCNG Patterns			OP.1		
SS-RSSI-Measurement			Not Applicable		
SMTC configuration			SMTC.1		

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 2		Cell 2		Cell 2	
SSB configuration		Config 1,2,4,5		SSB.1 FR1					
		Config 3,6		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15					
		Config 3,6		30					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS (Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	Depending on band group	dBm/15kHz	-88		-108.5		-119.5 + Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4,5		dBm/SCS	-88		-108.5		Same as Noc for 15kHz	
	Config 3,6	Depending on band group		-85		-105.5		-116.5 + Δ_{BG_offset}	
$\hat{E}_s / I_{ot}$			dB	-1.75		20		-3.2	
$\hat{E}_s / N_{oc}$			dB	-1.75		20		-3.2	
SS-RSRP Note3	Config 1,2,4,5	Depending on band group	dBm/SCS	-89.75		-88.5		-122.7 + Δ_{BG_offset}	
	Config 3,6	Depending on band group		-86.75		-85.5		-119.7 + Δ_{BG_offset}	
SS-SINR Note3			dB	-1.75		20		-4.0	
Io Note3	Config 1,2,4,5	Depending on band group	dBm/9.36MHz	-57.83		-60.5		-89.85 + Δ_{BG_offset}	
	Config 3,6	Depending on band group	dBm/38.16MHz	-51.73		-54.41		-83.75 + Δ_{BG_offset}	
Propagation condition			-	AWGN					
Antenna configuration			-	1x2					

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: NR operating band groups are as defined in clause 3.5.2.
NOTE 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 8.5.2.3.1.5-2: SS-SINR accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-SINR_35	SS-SINR_79	SS-SINR_32
Highest reported value (Cell 2)	SS-SINR_51	SS-SINR_94	SS-SINR_49
Extreme Conditions			
Lowest reported value (Cell 2)	SS-SINR_33	SS-SINR_77	SS-SINR_31
Highest reported value (Cell 2)	SS-SINR_53	SS-SINR_96	SS-SINR_50

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

8.5.2.3.2 E-UTRA SS-SINR absolute measurement accuracy of a NR FR2 neighbour cell

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

8.5.2.3.2.1 Test purpose

The purpose of this test is to verify that the inter-RAT SS-SINR measurement accuracy is within the specified limits for all bands, when the serving cell is E-UTRA and the target cell is NR FR2.

8.5.2.3.2.2 Test applicability

This test applies to all E-UTRA UE release 15 onwards supporting ss-SINR-Meas and capable of NR FR2 measurements.

8.5.2.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 8.5.2.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.8.5.2.3.2.

8.5.2.3.2.4 Test description

Two cells are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell and Cell 2 is the inter-RAT NR FR2 neighbour cell.

8.5.2.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 8.5.2.3.2.4.1-1.

Table 8.5.2.3.2.4.1-1: Supported test configurations

Configuration	Description
8.5.2.3.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE FDD
8.5.2.3.2-2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode, LTE TDD
NOTE: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 8.5.2.3.2.4.1-2.

Table 8.5.2.3.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-2 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in clause C.2.1
Connection Diagram	TE Part: A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	UE Part: A.3.4.1.1	
Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 8.5.2.3.2.4.1-3.

2. Message contents are defined in clause 8.5.2.3.2.4.3.
3. There are two carriers and two cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.
4. The UE Rx beam peak direction has been obtained previously using one of the Rx beam peak search procedures as described in Annex I.

8.5.2.3.2.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to Table 8.5.2.3.2.5-1 and Table 8.5.2.3.2.5-2 as appropriate. The TE shall ensure that the NR FR2 cell will be received by the UE from the Rx beam peak direction.
3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1 to configure inter-RAT NR neighbour cell periodical measurements.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. The UE shall transmit periodically MeasurementReport messages.
6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic MeasurementReport. The SS- SINR value of Cell 2 reported by the UE is compared to the expected SS- SINR. If the value is outside the limits in clause 8.5.2.3.2.5 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Tables 8.5.2.3.2.5-1 and 8.5.2.3.2.5-2 as appropriate and repeat steps 5-7.

8.5.2.3.2.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 8.5.2.3.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 Table 4.6.6-2B in TS 36.508 [25]

Table 8.5.2.3.2.4.3-2: ReportConfigInterRAT-DEFAULT(Periodical)

Derivation Path: 36.508 [25] Table 4.6.6-9			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			
ReportQuantityNR-r15 SEQUENCE {	PRESENT		
sinr	true		
}			
}			
}			
}			

8.5.2.3.2.5 Test requirement

Table 8.5.2.3.2.5-1 defines the general test parameters and Table 8.5.2.3.2.5-2 defines the primary level OTA settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 8.5.2.3.2.5-2 shall meet the corresponding absolute accuracy requirements in Table 8.5.2.3.2.5-3.

Table 8.5.2.3.2.5-1: SS-SINR Inter-RAT general test parameters

Parameter	Unit	Test 1	Test 2	Test 3
		Cell 2	Cell 2	Cell 2
SSB ARFCN		Freq1	freq1	freq1
Duplex mode		TDD	TDD	TDD
TDD configuration		TDDConf.3.1	TDDConf.3.1	TDDConf.3.1
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66
Downlink initial BWP configuration		DLBWP.0.1		
Uplink initial BWP configuration		ULBWP.0.1		
DRX cycle configuration	ms	Not applicable		
PDSCH Reference measurement channel		-	-	-
RMSI CORESET Reference Channel		-	-	-
OCNG Patterns		OP.1	OP.1	OP.1
SMTC configuration		SMTC.1	SMTC.1	SMTC.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-SINR, SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 8.5.2.3.2.5-2: SS-SINR Inter-RAT OTA related test parameters

Parameter	Unit	Test 1	Test 2	Test 3
		Cell 2	Cell 2	Cell 2
Angle of arrival configuration		Setup 1	Setup 1	Setup 1
Assumption for UE beams Note 10		Rough	Rough	Rough
N_{oc} Note1	dBm/15kHz Note4	-105	-105.1	(Table B.2.3-2 of TS 38.133 [6] Rx Beam Peak -5dB) (Note 7)
N_{oc} Note1	dBm/SCS Note4	-95.97	-96.07	(Table B.2.3-2 of TS 38.133 [6] Rx Beam Peak +4dB) (Note 7)
$\hat{E}_s / N_{oc}$	dB	-0.5	11	3.7
SSB_RP Note2	dBm/SCS Note4	-96.47	-85.07	(Table B.2.3-2 of TS 38.133 [6] Rx Beam Peak +7.6dB)

				(Note 8)
SS-SINR Note2	dB	-0.5	11	3.6
$\hat{E}_s / I_{ot}$ Note2	dB	-0.5	11	3.6
Io Note2	dBm/95.04 MHz Note4	-64.21	-55.75	(Table B.2.3-2 of TS 38.133 [6] Rx Beam Peak +43.19dB) (Note 9)

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SSB_RP, SS-SINR, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: Void
NOTE 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.
NOTE 5: Void
NOTE 6: Void
NOTE 7: N_{oc} for SCS 15kHz is applied at $-10\log_{10}(8)+4$dB above the minimum level specified in Table B.2.3-2 of TS 38.133 [6] for beam peak. N_{oc} for SCS 120kHz is applied at 4dB above the minimum level specified in Table B.2.3-2 of TS 38.133 [6] for beam peak.
Note 8: SSB_RP is applied at 3dB above the minimum level specified in Table B.2.3-2 of TS 38.133 [6] for beam peak.
Note 9: Io is applied at level $10\log_{10}(792)+6.54$dB above the minimum level specified in Table B.2.3-2 of TS 38.133 [6] for beam peak.
Note 10: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation.

Table 8.5.2.3.2.5-3: evaluation limits for the reported values

Normal Conditions	**Test 1**	**Test 2**	**Test 3**
Lowest reported value (Cell 2)	9	32	17
Highest reported value (Cell 2)	82	105	90
Extreme Conditions	**Test 1**	**Test 2**	**Test 3**
Lowest reported value (Cell 2)	7	30	15
Highest reported value (Cell 2)	84	107	92

9 NR sidelink

9.1 NR sidelink in FR1

9.1.1 UE transmit timing

9.1.1.0 Minimum conformance requirements

9.1.1.0.1 Minimum conformance requirements for GNSS as synchronization reference source

The requirements in this subclause are applicable when the reference timing used by the UE for NR sidelink communication is derived from GNSS.

The sidelink transmissions takes place $\left(N_{\mathrm{TA,SL}} + N_{\mathrm{TA\,offset}}\right) \times T_c$ before the subframe starting boundary as defined in TS 38.331 [13], where $N_{\mathrm{TA\,offset}} = 0$ and $N_{\mathrm{TA,SL}} = 0$.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 9.1.1.0.1-1.

Table 9.1.1.0.1-1: T_e Timing Error Limit

Frequency Range of sidelink	$T_{e_}$
FR1	12*64*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [7].	

The normative reference for this requirement is TS 38.133 [6] clause 12.2.2.

9.1.1.0.2 Minimum conformance requirements for SyncRef UE as synchronization reference source

The requirements in this subclause are applicable when the reference timing used for deriving sidelink transmission is from SyncRef UE transmitting sidelink synchronization signals.

The sidelink transmissions takes place $\left(N_{\mathrm{TA,SL}} + N_{\mathrm{TA\,offset}}\right) \times T_c$ before the reception of the first detected path (in time) of the corresponding timing reference frame from the SyncRef UE, where $N_{\mathrm{TA\,offset}} = 0$ and $N_{\mathrm{TA,SL}} = 0$.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 9.1.1.0.2-1.

Table 9.1.1.0.2-1: T_e Timing Error Limit

Frequency Range of sidelink	SCS of sidelink signals (kHz)	T_e
FR1	15	12*64*T_c
	30	8*64*T_c
	60	5*64*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [7].		

The normative reference for this requirement is TS 38.133 [6] clause 12.2.5.

9.1.1.0.3 Minimum conformance requirements for FR1 NR Cell as synchronization reference source

The requirements in this subclause are applicable when the reference timing used for sidelink transmissions is a NR serving cell on a non-NR sidelink carrier.

The sidelink transmissions takes place $\left(N_{\mathrm{TA,SL}} + N_{\mathrm{TA\,offset}}\right) \times T_c$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell, where $N_{\mathrm{TA\,offset}} = 0$ and $N_{\mathrm{TA,SL}} = 0$.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 9.1.1.0.3-1.

Table 9.1.1.0.3-1: T_e Timing Error Limit

Frequency Range of sidelink	SCS of SSB signals (kHz)	SCS of sidelink signals (kHz)	T_e
FR1	15	15	14*64*T_c
		30	12*64*T_c
		60	12*64*T_c
	30	15	10*64*T_c
		30	10*64*T_c
		60	9*64*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [7].			

The normative reference for this requirement is TS 38.133 [6] clause 12.2.3.

9.1.1.1 NR SA FR1 UE transmit timing accuracy for GNSS as synchronization reference source

9.1.1.1.1 Test purpose

The purpose of this test is to verify the UE timing requirements as specified in TS 38.133 [6] clause 12.2.2, when the GNSS is used as timing reference.

9.1.1.1.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting NR sidelink communication.

9.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.1.0.1

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.1.1.

9.1.1.1.4 Test description

9.1.1.1.4.1 Initial conditions

Configure the test equipment and the DUT according to the parameters in Table 9.1.1.1.4.1-1.

Table 9.1.1.1.4.1-1: Initial conditions for NR SA FR1 UE transmit timing accuracy for GNSS as synchronization reference source

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8. 1		
Channel bandwidth	PC5: As specified by the test configuration selected from Table 9.1.1.1.4.1-2.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.1	
Exceptions to connection diagram	N/A		

1. The parameter settings for the NR sidelink communication are pre-configured according to TS 38.508-1 [14] clause 4.10.1.
2. Message content exceptions are given in clause 9.1.1.1.4.3
3. The GNSS simulator is configured for Scenario #1: static in Geographical area #1, as defined in TS 38.508-1 [14] Table 4.11.2-2.

Table 9.1.1.1.4.1-2: NR sidelink test parameters for NR SA FR1 UE transmit timing accuracy for GNSS as synchronization reference source

Parameter	Unit	Value	Comment
RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 1	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
Active cell		None	
Active SyncRef UE		None	
NR sidelink communication pre-configuration		As specified in section A.11.2	IE values unless specified otherwise in this test.

PSCCH Reference Measurement Channel		CC.1A HD	As specified in Table A.11.3-1
PSSCH Reference Measurement Channel		CD.1A HD	As specified in Table A.11.3-2
Propagation condition		AWGN	
Note 1: The UE is only required to be tested in one of the supported test configurations.			

9.1.1.1.4.2 Test procedure

For this test, the UE is triggered by the test loop function to transmit for NR sidelink communication. There is one GNSS based synchronization source during the test. The test system can emulate and send the GNSS signal to the test UE.

1. Ensure the UE is in state 4-A with generic procedure parameters Test Mode = *On* and GNSS Sync = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1.
3. Wait at least 20 seconds for the UE to acquire the GNSS signal.
4. The SS sends AT command +CCUTLE to close test loop function and trigger UE to transmit.
5. The UE starts to transmit NR sidelink communication data over the PC5 interface in accordance of pre-configuration and to schedule PSSCH.
6. After the UE is synchronized to the GNSS synchronization source, the SS shall monitor all PSSCH transmissions and verify that, for each received PSSCH, the timing is within $\left(N_{\mathrm{TA,SL}} + N_{\mathrm{TA\ offset}}\right) \times T_c \pm T_e$ before the subframe starting boundary determined by the GNSS reference time in the GNSS simulator, where $N_{\mathrm{TA\ offset}} = 0$ and $N_{\mathrm{TA,SL}} = 0$, and T_e is given in Table 9.1.1.1.5-1.
7. The SS sends AT command +CCUTLE to open test loop function.

9.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.1.1.4.3-1: +CCUTLE (Test procedure, step 4)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Close and Transmit

Table 9.1.1.1.4.3-2: +CCUTLE (Test procedure, step 7)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Open

9.1.1.1.5 Test requirement

The sidelink transmissions takes place $\left(N_{\mathrm{TA,SL}} + N_{\mathrm{TA\ offset}}\right) \times T_c$ before the subframe starting boundary as defined in TS 38.331 [13] clause 5.8.12, where $N_{\mathrm{TA\ offset}} = 0$ and $N_{\mathrm{TA,SL}} = 0$.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 9.1.1.1.5-1.

Table 9.1.1.1.5-1: T_e Timing Error Limit

Frequency Range of sidelink	T_e Note 2
FR1	$15*64*T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]. Note 2: Including the test tolerance given in annex F.	

9.1.1.2 NR SA FR1 UE transmit timing accuracy for SyncRef UE as synchronization reference source

9.1.1.2.1 Test purpose

The purpose of this test is to verify the UE timing requirements as specified in TS 38.133 [6] clause 12.2.5, when SyncRef UE is used as timing reference.

9.1.1.2.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting NR sidelink communication.

9.1.1.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.1.0.2

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.1.2.

9.1.1.2.4 Test description

9.1.1.2.4.1 Initial conditions

Configure the test equipment and the DUT according to the parameters in Table 9.1.1.2.4.1-1.

Table 9.1.1.2.4.1-1: Initial conditions for NR SA FR1 UE transmit timing accuracy for SyncRef UE as synchronization reference source

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8. 1		
Channel bandwidth	PC5: As specified by the test configuration selected from Table 9.1.1.2.4.1-2.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.1	
Exceptions to connection diagram	GNSS System Simulator is not used.		

1. The parameter settings for the NR sidelink communication are pre-configured according to TS 38.508-1 [14] clause 4.10.1.
2. Message content exceptions are given in clause 9.1.1.2.4.3
3. There is one NR-SS-UE (SyncRef UE 1) specified in this test. SyncRef UE 1 is configured according to the parameters in Table 9.1.1.2.4.1-1.

Table 9.1.1.2.4.1-2: NR sidelink test parameters for NR SA FR1 UE transmit timing accuracy for SyncRef UE as synchronization reference source

Parameter	Unit	Value	Comment
RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 3	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
Active cell		None	
Active SyncRef UE		SyncRef UE 1	Transmitting S-SSB on RF channel number 1
NR sidelink communication preconfiguration		As specified in section A.11.2	IE values unless specified otherwise in this test.

PSCCH Reference Measurement Channel			CC.1A HD	As specified in Table A.11.3-1
PSSCH Reference Measurement Channel			CD.1A HD	As specified in Table A.11.3-2
Noc Note1,2		dBm/30kHz	-95	
SyncRef UE 1	sl-SSB-TimeAllocation		sl-SSB-TimeAllocation1	
	slssid		30	
	inCoverage		TRUE	In MIB-SL
	networkControlledSyncTx		ON	
	NR sidelink communication configuration		As specified in section A.11.2	IE values unless specified otherwise in this test.
	Ês/Noc		3	
	PSBCH-RSRP Note1, Note 2	dBm/30kHz	-92	
Propagation condition			AWGN	
Note 1: PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: S-PSS Ês/Noc and S-PSS Ês/Noc are set the same as PSBCH Ês/Noc. Note 3: The UE is only required to be tested in one of the supported test configurations.				

9.1.1.2.4.2 Test procedure

In this test there is one active NR-SS-UE (SyncRef UE 1) and no serving cell nor GNSS signals. The UE is triggered by the test loop function to transmit for NR sidelink communication.

1. Ensure the UE is in state 4-A with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The SS sends AT command +CCUTLE to close test loop function and trigger UE to transmit.
3. The UE starts to transmit NR sidelink communication data over the PC5 interface in accordance of pre-configuration and to schedule PSSCH.
4. Power on SyncRef UE 1 and wait at least 8 seconds for the UE to be synchronized to SyncRef UE 1.
5. After the UE is synchronized to SyncRef UE 1, the SS shall monitor all PSSCH transmissions and verify that, for each received PSSCH, the timing is within $\left(N_{\mathrm{TA,SL}} + N_{\mathrm{TA\,offset}}\right) \times T_c \pm T_e$ before the subframe starting boundary determined by the reception of the first detected path (in time) of corresponding timing reference frame from SyncRef UE 1, where $N_{\mathrm{TA\,offset}} = 0$ and $N_{\mathrm{TA,SL}} = 0$, and T_e is given in Table 9.1.1.2.5-1.
6. The SS sends AT command +CCUTLE to open test loop function.

9.1.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.1.2.4.3-1: +CCUTLE (Test procedure, step 2)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Close and Transmit

Table 9.1.1.2.4.3-2: MasterInformationBlockSidelink (SyncRef UE 1)

Derivation Path: TS 38.508-1 [14], Table 4.6.1A-1 with condition NB_SYNC and RX

Table 9.1.1.2.4.3-3: SL-ConfigDedicatedNR (SyncRef UE 1)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-7 with condition SELECTED			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ConfigDedicatedNR-r16 ::= SEQUENCE {			
sl-PHY-MAC-RLC-Config-r16 SEQUENCE {			

sl-FreqInfoToAddModList-r16 SEQUENCE (SIZE (1..maxNrofFreqSL-r16)) OF SL-FreqConfig-r16 {	1 entry		
SL-FreqConfig-r16[1] SEQUENCE {		entry 1	
sl-SyncConfigList-r16 SEQUENCE (SIZE (1..maxSL-SyncConfig-r16)) OF SL-SyncConfig-r16 {	1 entry		
SL-SyncConfig-r16[1]	SL-SyncConfig	entry 1 Table 9.1.1.2.4.3-4	
}			
sl-SyncPriority-r16	gnbEnb		
}			
}			
networkControlledSyncTx-r16	on		
}			
}			

Table 9.1.1.2.4.3-4: SL-SyncConfig (Table 9.1.1.2.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-31			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-SyncConfig-r16 ::= SEQUENCE {			
sl-SSID-r16	30		
}			
}			

Table 9.1.1.2.4.3-5: +CCUTLE (Test procedure, step 6)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Open

9.1.1.2.5 Test requirement

The sidelink transmissions takes place $\left(N_{\mathrm{TA,SL}} + N_{\mathrm{TA\,offset}}\right) \times T_c$ before the reception of the first detected path (in time) of the corresponding timing reference frame from SyncRef UE 1, where $N_{\mathrm{TA\,offset}} = 0$ and $N_{\mathrm{TA,SL}} = 0$.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 9.1.1.2.5-1.

Table 9.1.1.2.5-1: T_e Timing Error Limit

Frequency Range of sidelink	SCS of sidelink signals (kHz)	T_e Note 2
FR1	30	$10*64*T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]. Note 2: Including the test tolerance given in annex F.		

9.1.1.3 NR SA FR1 UE transmit timing accuracy for FR1 NR cell as synchronization reference source

9.1.1.3.1 Test purpose

The purpose of this test is to verify the UE timing requirements as specified in TS 38.133 [6] clause 12.2.5, when the downlink timing of the serving cell (RRC_IDLE) or PCell (RRC_CONNECTED) on a non-sidelink NR carrier is used as timing reference.

9.1.1.3.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting NR Uu and sidelink communication.

9.1.1.3.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.1.0.3

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.1.3.

9.1.1.3.4 Test description

9.1.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 9.1.1.3.4.1-1.

Table 9.1.1.3.4.1-1: Supported test configurations for FR1 NR Cell

Configuration	Description
9.1.1.3-1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
9.1.1.3-2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
9.1.1.3-3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 9.1.1.3.4.1-2.

Table 9.1.1.3.4.1-2: Initial conditions for NR SA FR1 UE transmit timing accuracy for FR1 NR cell as synchronization reference source

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	Uu & PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8.2.1		
Channel bandwidth	Uu: As specified by the test configuration selected from Table 9.1.1.3.4.1-1 PC5: As specified by the test configuration selected from Table 9.1.1.3.4.1-3.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.3	
Exceptions to connection diagram	N/A		

1. The parameter settings for the NR sidelink communication are pre-configured according to TS 38.508-1 [14] clause 4.10.1.
2. Message content exceptions are defined in clause 9.1.1.3.4.3
3. There is one NR Uu carrier and one NR Cell (Cell 1) specified in this test. Cell 1 is configured according to Annex C.1.1 and C.1.2.
4. Test parameters for Cell 1 are given in Table 9.1.1.3.4.1-3.

Table 9.1.1.3.4.1-3: NR sidelink test parameters for NR SA FR1 UE transmit timing accuracy for FR1 NR cell as synchronization reference source

Parameter	Unit	Value	Comment
RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 1	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
Active cell		Cell 1	
Active SyncRef UE		None	

V2X sidelink communication configuration		As specified in section A.11.2	IE values unless specified otherwise in this test.
PSCCH Reference Measurement Channel		CC.1A HD	As specified in Table A.11.3-1
PSSCH Reference Measurement Channel		CD.1A HD	As specified in Table A.11.3-2
Note 1: The UE is only required to be tested in one of the supported test configurations.			

Table 9.1.1.3.4.1-3: Cell Test Parameters for NR SA FR1 UE transmit timing accuracy for FR1 NR cell as synchronization reference source

Parameter		Unit	Cell 1
RF Channel Number			2
Duplex Mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
Channel Bandwidth ($BW_{channel}$)	Config 1,2	MHz	10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1
DRX Cycle			N/A
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.2
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Noc Note2	Config 1,2,3	dBm/15 kHz	-98
Noc Note2	Config 1,2	dBm/SCS	-98
	Config 3		-95
Ês/Noc		dB	3
SS-RSRP Note3	Config 1,2	dBm/SCS	-95
	Config 3		-92
Io Note 3	Config 1,2	dBm/9.36 MHz	-65.2
	Config 3	dBm/38.1 MHz	-59.2
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

9.1.1.3.4.2 Test procedure

In this test there is one active cell (Cell 1). For this test, the UE is triggered by the test loop function or the upper layers to transmit for NR sidelink communication.

1. Ensure the UE is in state 1N-B with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The SS sends AT command +CCUTLE to close test loop function and trigger UE to transmit.
3. The UE starts to transmit NR sidelink communication data over the PC5 interface in according to Pre-configuration and to schedule PSSCH.
4. The SS shall monitor all PSSCH transmissions and verify that, for each received PSSCH, the timing is within $\left(N_{\mathrm{TA,SL}} + N_{\mathrm{TA\,offset}}\right) \times T_c \pm T_e$ before the subframe starting boundary determined by the reception of the first detected path (in time) of the corresponding downlink frame from the Cell 1, where $N_{\mathrm{TA\,offset}} = 0$ and $N_{\mathrm{TA,SL}} = 0$, and T_e is given in Table 9.1.1.3.5-1.
5. The SS sends AT command +CCUTLE to open test loop function.
6. Ensure the UE is in state 3N-B with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
7. The SS sends an *RRCReconfiguration* message with *sl-ConfigDedicatedNR* to provide sidelink configuration.
8. The UE sends an *RRCReconfigurationComplete* message.
9. The SS sends a CLOSE UE TEST LOOP message to close test loop function and trigger UE to transmit.
10. The UE sends a CLOSE UE TEST LOOP COMPLETE message.
11. The SS shall monitor all PSSCH transmissions and verify that, for each received PSSCH, the timing is within $\left(N_{\mathrm{TA,SL}} + N_{\mathrm{TA\,offset}}\right) \times T_c \pm T_e$ before the subframe starting boundary determined by the reception of the first detected path (in time) of the corresponding downlink frame from the Cell 1, where $N_{\mathrm{TA\,offset}} = 0$ and $N_{\mathrm{TA,SL}} = 0$, and T_e is given in Table 9.1.1.3.5-1.
12. The SS sends an OPEN UE TEST LOOP message to open test loop function.
13. The UE sends an OPEN UE TEST LOOP COMPLETE message.

9.1.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions: Table 9.1.1.3.4.3-1: Common Exception messages for NR SA FR1 UE transmit timing accuracy for FR1 NR cell as synchronization reference source

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO and Synchronous cells, where smtc1 field is set to SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3: with condition SMTC.2.

Table 9.1.1.3.4.3-2: SIB12-IEs-r16 (Preamble and test procedure, Cell 1)

Derivation Path: TS 38.508-1 [14], Table 4.6.2-14A			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB12-IEs-r16 ::= SEQUENCE {			
sl-ConfigCommonNR-r16 SEQUENCE {			
sl-FreqInfoList-r16 SEQUENCE (SIZE (1..maxNrofFreqSL-r16)) OF SL-FreqConfigCommon-r16 {	1 entry		
SL-FreqConfigCommon-r16[1] SEQUENCE {		entry 1	
sl-SyncPriority-r16	gnbEnb		
}			
}			
}			
}			

Table 9.1.1.3.4.3-3: +CCUTLE (Test procedure, step 2)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Close and Transmit

Table 9.1.1.3.4.3-4: +CCUTLE (Test procedure, step 5)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Open

Table 9.1.1.3.4.3-5: RRCReconfiguration (Test procedure, step 7)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SIDELINK			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
sl-ConfigDedicatedNR-r16 CHOICE {			
setup	SL-ConfigDedicatedNR	Table 9.1.1.3.4.3-5	
}			
}			
}			
}			
}			
}			
}			

Table 9.1.1.3.4.3-6: SL-ConfigDedicatedNR (Table 9.1.1.3.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-7 with condition SELECTED			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ConfigDedicatedNR-r16 ::= SEQUENCE {			
sl-PHY-MAC-RLC-Config-r16 SEQUENCE {			
sl-FreqInfoToAddModList-r16 SEQUENCE (SIZE (1..maxNrofFreqSL-r16)) OF SL-FreqConfig-r16 {	1 entry		
SL-FreqConfig-r16[1] SEQUENCE {		entry 1	
sl-SyncPriority-r16	gnbEnb		
}			
}			
}			
}			

Table 9.1.1.3.4.3-7: CLOSE UE TEST LOOP (Test procedure, step 9)

Derivation Path: 36.508 [25] Table 4.7A-3 with condition UE TEST LOOP MODE E(V2X Transmission)			
Information Element	**Value/remark**	**Comment**	**Condition**
UE test loop mode E LB setup			
Communication Transmit or Receive	0 0 0 0 0 0 0 1	'01' indicates V2X UE triggered to transmit NR sidelink communication with single spatial layer.	

9.1.1.3.5 Test requirement

The sidelink transmissions takes place $\left(N_{\mathrm{TA,SL}} + N_{\mathrm{TA\ offset}}\right) \times T_c$ before the subframe starting boundary determined by the reception of the first detected path (in time) of the corresponding downlink frame from the Cell 1, where $N_{\mathrm{TA\ offset}} = 0$ and $N_{\mathrm{TA,SL}} = 0$.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 9.1.1.3.5-1.

Table 9.1.1.3.5-1: T_e Timing Error Limit

Frequency Range of sidelink	SCS of SSB signals (kHz)	SCS of sidelink signals (kHz)	T_e Note2
FR1	15	30	15*64*T_c
	30	30	13*64*Tc
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]. Note 2: Including the test tolerance given in Annex F.			

9.1.2 Initiation/Cease of S-SSB transmission

9.1.2.0 Minimum conformance requirements

9.1.2.0.1 Minimum conformance requirements for FR1 NR cell as synchronization reference source

The requirements apply when the NR Cell is used as synchronization reference source and when the UE is

- out of coverage on the NR sidelink carrier and in-coverage with a serving cell on a NR non-sidelink carrier,

and when the conditions for SLSS transmissions specified in TS 38.331[13] are met; *networkControlledSyncTx* is not configured; and *syncTxThreshIC* is included in *SIB12*. The UE shall be capable of measuring the RSRP of the cell used as synchronization reference source to evaluate to initiate/cease SLSS transmissions within $T_{evaluate,SLSS}$

where,

- $T_{evaluate,SLSS}$ is as specified in Table 9.1.2.0.1-1 when UE performs SSB based measurements without measurement gaps.

- $T_{evaluate,SLSS}$ is as specified in Table 9.1.2.0.1-2 when UE performs SSB based measurements with measurement gaps.

Table 9.1.2.0.1-1: $T_{evaluate,SLSS}$ for measurements without measurement gaps when NR cell is used as synchronization reference source (FR1)

DRX cycle in NR cell	$T_{evaluate,SLSS}$
No DRX	max(400ms, ceil(2 x 5 x K_p) x SMTC period) Note 1
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x 2 x 5 x K_p) x max(SMTC period, DRX cycle))

DRX cycle>320ms	ceil(7 x K_p) x DRX cycle
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.1.2.0.1-2: $T_{evaluate,SLSS}$ for measurements with measurement gaps when NR cell is used as synchronization reference source (FR1)

DRX cycle in NR cell	$T_{evaluate,SLSS}$
No DRX	max(400ms, 2 x 5 x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(2 x 1.5x 5) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	7 x max(MGRP, DRX cycle) x $CSSF_{intra}$

If higher layer filtering is configured, an additional delay in evaluation to initiate/cease SLSS transmissions can be expected.

For the NR cell as synchronization reference source:

- SS-RSRP related side conditions given in 38.133[6] clauses 10.1.2 for FR1, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in 38.133[6] clauses 10.1.7 for FR1, respectively, for a corresponding Band,
- SS-SINR related side conditions given in 38.133[6] clauses 10.1.12 for FR1, respectively, for a corresponding Band,
- SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.

The normative reference for this requirement is TS 38.133 [6] clause 12.3.1.1.

9.1.1.0.2 Minimum conformance requirements for SyncRef UE as synchronization reference source

The requirements apply when SyncRef UE is used as synchronization reference source and when the UE is

- in any cell selection state, or
- out of coverage on the NR sidelink carrier and is associated with a serving cell on a non-sidelink carrier,

and when the conditions for SLSS transmissions specified in TS 38.331[13] are met and when SyncRef UE is used as synchronization reference source and if *syncTxThreshOoC* is included in the pre-configuration parameters.

The UE shall be capable of measuring the PSBCH-RSRP of the selected SyncRef UE used as synchronization reference source and evaluate it to initiate/cease SLSS transmissions within $T_{evaluate,SLSS}$ = 4 S-SSB periods.

If higher layer filtering for PSBCH-RSRP measurements is pre-configured, an additional delay in evaluation to initiate/cease SLSS transmissions can be expected.

For the selected SyncRef UE as defined in TS 38.331 [2] used to derive transmission timing for NR sidelink communication:

- PSBCH-RSRP related side conditions given in 38.133[6] clause 10.4 for a corresponding Band are fulfilled,
- NR S-SSB_RP and S-SSB Ês/Iot according to Annex B.4 for a corresponding Band are fulfilled.

The requirements for absolute accuracy of PSBCH-RSRP apply to a NR sidelink synchronization source on the same frequency as that of the own NR sidelink UE performing the measurement in FR1.

The accuracy requirements in Table 9.1.1.0.2-1 are valid under the following conditions:

- Demodulation reference signals are transmitted from one port.

- Conditions defined in Clause 7.3E of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for PSBCH-RSRP measurements are fulfilled according to Annex B.4.2 for a corresponding Band for each relevant PSBCH-DMRS.

Table 9.1.1.0.2-1: Intra-frequency PSBCH-RSRP absolute accuracy in FR1

Accuracy		Conditions						
			Io Note 1 range					
Normal condition	Extreme condition	Ês/Iot Note 3	NR sidelink operating band groups Note 2	Minimum Io				Maximum Io
				dBm / SCS_{SL}				
dB	dB	dB		SCS_{SL} = 15 kHz	SCS_{SL} = 30 kHz	SCS_{SL} = 60 kHz	$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
±4.5	±9	≥-6	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-70
±8	±11	≥-6	NR_TDD_FR1_B, NR_TDD_FR1_J	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR sidelink operating band groups in FR1 are as defined in clause 3.5.2. NOTE 3: Ês/Iot for a SyncRef UE is the Ês/Iot of PSBCH-DMRS.								

The relative accuracy of PSBCH-RSRP is defined as the PSBCH-RSRP measured from one NR sidelink synchronization source compared to the PSBCH-RSRP measured from another NR sidelink synchronization source on the same frequency in FR1.

The accuracy requirements in Table 9.1.1.0.2-2 are valid under the following conditions:

- Demodulation reference signals are transmitted from one port.
- Conditions defined in Clause 7.3E of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for PSBCH-RSRP accuracy measurements are fulfilled according to Annex B.4.2 for a corresponding Band for each relevant PSBCH-DMRS.

Table 9.1.1.0.2-2: Intra-frequency PSBCH-RSRP relative accuracy in FR1

Accuracy		Conditions						
			Io Note 1 range					
Normal condition	Extreme condition	Ês/Iot Note 3	NR sidelink operating band groups Note 2	Minimum Io				Maximum Io
				dBm / SCS_{SL}				
dB	dB	dB		SCS_{SL} = 15 kHz	SCS_{SL} = 30 kHz	SCS_{SL} = 60 kHz	$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
±2	±3	≥-3	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-50
±3	±3	≥-6	Note 4	Note 4	Note 4	Note 4	N/A	Note 4
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR sidelink operating band groups in FR1 are as defined in clause 3A.4.1. NOTE 3: Ês/Iot for a SyncRef UE is the Ês/Iot of PSBCH-DMRS. NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.								

The normative references for this requirement are TS 38.133 [6] clause 10.4.2 and 12.3.1.4.

9.1.2.1 NR SA FR1 initiation/cease of S-SSB transmission for FR1 NR cell as synchronization reference source

9.1.2.1.1 Test purpose

The purpose of this test is to verify that the NR sidelink UE meets the requirements related to the maximum evaluation time allowed to initiate and cease S-SSB transmissions defined in TS 38.133 [6] clause 12.3.1.1, when the reference timing used for sidelink transmissions is a NR serving cell in FR1 on a non-sidelink carrier.

9.1.2.1.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting NR Uu and sidelink communication.

9.1.2.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.2.0.1

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.2.1.

9.1.2.1.4 Test description

9.1.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 9.1.2.1.4.1-1.

Table 9.1.2.1.4.1-1: Supported test configurations for FR1 NR Cell

Configuration	Description
9.1.2.1-1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
9.1.2.1-2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
9.1.2.1-3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 9.1.2.1.4.1-2.

Table 9.1.2.1.4.1-2: Initial conditions for Initiation/Cease of S-SSB Transmission Test for FR1 NR cell as synchronization reference source

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	Uu & PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8.2.1		
Channel bandwidth	Uu: As specified by the test configuration selected from Table 9.1.1.3.4.1-1 PC5: As specified by the test configuration selected from Table 9.1.1.3.4.1-2.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.3	
Exceptions to connection diagram	N/A		

1. The parameter settings for the NR sidelink communication are configured according to Table 9.1.2.1.4.1-3.
2. Message content exceptions are given in clause 9.1.2.1.4.3
3. There is one NR Uu carrier and one NR Cell (Cell 1) specified in this test. Cell 1 is configured according to Annex C.1.1 and C.1.2.
4. General test parameters for Cell 1 are given in Table 9.1.2.1.4.1-3.

Table 9.1.2.1.4.1-3: NR sidelink test parameters and NR Cell general test parameters for Initiation/Cease of S-SSB Transmission Test for FR1 NR cell as synchronization reference source

Parameter	Unit	Value	Comment
SCS	kHz	30	
Active cell		Cell 1	Serving cell on RF channel number 1
Active SyncRef UE		None	
Active NR sidelink UE		NR sidelink UE	Transmitting S-SSB on RF channel number 2(HD carrier in Band n47 or n38)
NR sidelink communication configuration		As specified in A.11.2	IE values unless specified otherwise in this test
networkControlledSyncTx		Not configured	
syncTxThreshIC	dBm/SCS	-110	In SIB12
DRX		OFF	
T1	s	3	
T2	s	5.24	
T3	s	5.24	

9.1.2.1.4.2 Test procedure

In this test there is one active cell (Cell 1). The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

1. Ensure the UE is in state 1N-B with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The SS shall set parameters according to T1 in Table 9.1.2.1.5-1. T1 starts.
3. If the SS observes that no SL SSB is transmitted by the UE until T1 expires then count a success for the event "No S-SSB transmission", otherwise count a fail for the event "No S-SSB transmission".
4. When T1 expires, the SS shall switch the power setting from T1 to T2 in Table 9.1.2.1.5-1. T2 starts.
5. If the UE starts to send S-SSB within 560 ms from the start of T2 then count a success for the event "S-SSB transmission initiation", otherwise count a fail for the event "S-SSB transmission initiation".
6. When T2 expires, the SS shall switch the power setting from T2 to T3 in Table 9.1.2.1.5-1. T3 starts.
7. If the UE stops to send S-SSB within 560 ms from the start of T3 then count a success for the event "S-SSB transmission cease", otherwise count a fail for the event "S-SSB transmission cease".
8. Repeat step 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

Each of the events "No S-SSB transmission", "S-SSB transmission initiation" and "S-SSB transmission cease" is evaluated independently for the statistic, resulting in an event verdict pass or fail. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

9.1.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.2.1.4.3-1: Common Exception messages for NR SA FR1 initiation/cease of S-SSB transmission for FR1 NR cell as synchronization reference source

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-1 with condition SMTC.2 and Asynchronous cells for test configuration 9.1.2.1-1 Table H.2.1-1 with condition SMTC.1 and Synchronous cells for test configuration 9.1.2.1-2 and 9.1.2.1-3

Table 9.1.2.1.4.3-2: SIB12-IEs-r16 (Preamble and test procedure, Cell 1)

Derivation Path: TS 38.508-1 [14], Table 4.6.2-14A			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB12-IEs-r16 ::= SEQUENCE {			
sl-ConfigCommonNR-r16 SEQUENCE {			
sl-FreqInfoList-r16 SEQUENCE (SIZE (1..maxNrofFreqSL-r16)) OF SL-FreqConfigCommon-r16 {	1 entry		
SL-FreqConfigCommon-r16[1] SEQUENCE {		entry 1	
sl-SyncPriority-r16	gnbEnb		
sl-SyncConfigList-r16 SEQUENCE (SIZE (1..maxSL-SyncConfig-r16)) OF SL-SyncConfig-r16 {	1 entry		
SL-SyncConfig-r16[1]	SL-SyncConfig	entry 1 Table 9.1.2.1.4.3-3	
}			
}			
}			
}			
}			

Table 9.1.2.1.4.3-3: SL-SyncConfig (Table 9.1.2.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-31			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-SyncConfig-r16 ::= SEQUENCE {			
sl-filterCoefficient-r16	fc0	L3 filtering is not used to avoid introducing additional delay	
txParameters-r16 SEQUENCE {			
syncTxThreshIC-r16	2	actual threshold is -120+2*5 = -110 dBm	
syncTxThreshOoC-r16	Not present		
}			
}			

9.1.2.1.5 Test requirement

Cell specific test parameters for NR Cell 1 is given in Table 9.1.2.1.5-1.

Table 9.1.2.1.5-1: FR1 NR Cell-specific test parameters for Initiation/Cease of S-SSB Transmission Test for FR1 NR cell as synchronization reference source

Parameter		**Unit**	**Cell1**		
			T1	**T2**	**T3**
NR RF Channel Number			1		
Duplex Mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
Channel Bandwidth ($BW_{channel}$)	Config 1,2	MHz	10:$N_{RB,c}$ = 52		
	Config 3		40:$N_{RB,c}$ = 106		
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1		
DRX Cycle		ms	N/A		

PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		
	Config 2		SR.1.1 TDD		
	Config 3		SR.2.1 TDD		
CORESET Reference Channel	Config 1		CR.1.1 FDD		
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
SSB configuration	Config 1,2		SSB.1 FR1		
	Config 3		SSB.2 FR1		
SMTC Configuration	Config 1		SMTC.2		
	Config 2,3		SMTC.1		
TRS configuration	Config 1		TRS.1.1 FDD		
	Config 2		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		
OCNG Patterns			OP.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
Noc Note2		Config 1,2	dBm/15 kHz		
		Config 3			
		Config 1,2,3	dBm/SCS		
Ês/Noc		dB	7.6 Note 5	-4.5	7.6 Note 5
Ês/Iot		dB	7.6	-4.5	7.6
SS-RSRP Note3	Config 1,2	dBm/SCS	-103.95	116.05	-103.95
	Config 3		-103.95	-116.05	-103.95
Io Note3	Config 1,2	dBm/9.36MHz	-75.30	-82.28	-75.30
	Config 3	dBm/38.16MHz	-72.20	-79.18	-72.20
Propagation condition			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Including the test tolerance given in Annex F.

During T1, the SS-RSRP of the PCell is above *syncTxThreshIC* and the UE is not expected to be transmitting S-SSB.

During T2, the SS-RSRP of the PCell is lowered below *syncTxThreshIC* and the UE is expected to initiate S-SSB transmissions.

During T3, the SS-RSRP of the PCell is increased back to be above *syncTxThreshIC* and the UE is expected to cease S-SSB transmissions.

The S-SSB transmission initiation delay is defined as the time from the beginning of time period T2 up to the moment when the UE initiates the S-SSB transmission.

The S-SSB transmission initiation delay shall be less than $T_{evaluate,SLSS}$ + S-SSB period = 560ms, where,

$T_{evaluate,SLSS}$ = max(400 ms, ceil (10 · Kp) · SMTC period) = 400 ms, is the evaluation time specified in 38.133 [6] Table 12.3.1.1-1, where

SMTC period = 20ms according to Table 9.1.2.1.5-1.

K_p = 1 according to Table 9.1.2.1.5-1.

S-SSB period = 160 ms.

The S-SSB transmission cease delay is defined as the time from the beginning of time period T3 up to the moment when the UE ceases the S-SSB transmission.

The S-SSB transmission cease delay shall be less than $T_{evaluate,SLSS}$ + S-SSB period = 560ms.

The rate of correct initiation/cease delay of S-SSB transmissions observed during repeated tests shall be at least 90%.

9.1.2.2 NR SA FR1 initiation/cease of S-SSB transmission for SyncRef UE as synchronization reference source

9.1.2.2.1 Test purpose

The purpose of this test is to verify that the NR sidelink UE meets the requirements related to the maximum evaluation time allowed to initiate and cease S-SSB transmissions defined in TS 38.133 [6] clause 12.3.1.4, when the reference timing used for sidelink transmissions is a SyncRef UE.

9.1.2.2.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting NR sidelink communication.

9.1.2.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.2.0.2

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.2.2.

9.1.2.2.4 Test description

9.1.2.2.4.1 Initial conditions

Configure the test equipment and the DUT according to the parameters in Table 9.1.2.2.4.1-1.

Table 9.1.2.2.4.1-1: Initial conditions for NR SA FR1 initiation/cease of S-SSB transmission for SyncRef UE as synchronization reference source

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8.		
Channel bandwidth	PC5: As specified by the test configuration selected from Table 9.1.1.3.4.1-2.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.1	

Exceptions to connection diagram	GNSS System Simulator is not used.	

1. The parameter settings for the NR sidelink communication are configured according to Table 9.1.2.2.4.1-2.
2. Message content exceptions are given in clause 9.1.2.2.4.3
3. There is one NR-SS-UE (SyncRef UE 1) specified in this test. SyncRef UE 1 is configured according to the parameters in Table 9.1.1.2.4.1-2.

Table 9.1.2.2.4.1-2: NR sidelink test parameters for NR SA FR1 initiation/cease of S-SSB transmission for SyncRef UE as synchronization reference source

Parameter	Unit	Value	Comment
SCS	kHz	30	
Active cell		None	
Active SyncRef UE		SyncRef UE 1	Transmitting S-SSB on RF channel number 1(HD carrier in Band n47 or n38)
Active NR sidelink UE		NR sidelink UE	Transmitting S-SSB on RF channel number 1(HD carrier in Band n47 or n38)
NR sidelink communication preconfiguration		As specified in section A.11.2	IE values unless specified otherwise in this test
networkControlledSyncTx		Not configured	
syncTxThreshOoC	dBm/30kHz	-100	
T1	s	3	
T2	s	5.24	
T3	s	5.24	

9.1.2.2.4.2 Test procedure

In this test there is one active NR-SS-UE (SyncRef UE 1) and no serving cell nor GNSS signals. The test system shall emulate SyncRef UE 1 to transmit S-SSB every synchronization period with the SLSSID and inCoverage indicator as specified in Table 9.1.2.2.5-1.

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

1. Ensure the UE is in state 4-A with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The SS powers on SyncRef UE 1, sets parameters according to T3 in Table 9.1.2.2.5-1. Then the SS waits at least 8 seconds for the UE to be synchronized to SyncRef UE 1.
3. The SS sets parameters according to T1 in Table 9.1.2.2.5-1, T1 starts.
4. During T1, if the SS observes that no SL SSB is transmitted by the UE until T1 expires, then count a success for the event "No S-SSB transmission", otherwise count a fail for the event "No S-SSB transmission".
5. When T1 expires, the SS shall switch the power setting from T1 to T2 in Table 9.1.2.2.5-1. T2 starts.
6. If the UE
   a) starts to send S-SSB within 800 ms from the start of T2, and
   b) uses SLSSID = 30, and
   c) *inCoverage* = FALSE in *MasterInformationBlockSidelink*

then count a success for the event "S-SSB transmission initiation", otherwise count a fail for the event "S-SSB transmission initiation".

7. When T2 expires, the SS shall switch the power setting from T2 to T3 in Table 9.1.2.2.5-1. T3 starts.
8. If the UE transmits no SL SSB from 800 ms after the start of T3 then count a success for the event "S-SSB transmission cease", otherwise count a fail for the event "S-SSB transmission cease".
9. Repeat step 3-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

Each of the events "No S-SSB transmission", "S-SSB transmission initiation" and "S-SSB transmission cease" is evaluated independently for the statistic, resulting in an event verdict pass or fail. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

9.1.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.2.2.4.3-1: MasterInformationBlockSidelink (SyncRef UE 1)

Derivation Path: TS 38.508-1 [14], Table 4.6.1A-1 with condition NB_SYNC and RX

Table 9.1.2.2.4.3-2: SL-ConfigDedicatedNR (SyncRef UE 1)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-7 with condition SELECTED			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ConfigDedicatedNR-r16 ::= SEQUENCE {			
sl-PHY-MAC-RLC-Config-r16 SEQUENCE {			
sl-FreqInfoToAddModList-r16 SEQUENCE (SIZE (1..maxNrofFreqSL-r16)) OF SL-FreqConfig-r16 {	1 entry		
SL-FreqConfig-r16[1] SEQUENCE {		entry 1	
sl-SyncConfigList-r16 SEQUENCE (SIZE (1..maxSL-SyncConfig-r16)) OF SL-SyncConfig-r16 {	1 entry		
SL-SyncConfig-r16[1]	SL-SyncConfig	entry 1 Table 9.1.2.2.4.3-3	
}			
sl-SyncPriority-r16	gnbEnb		
}			
}			
networkControlledSyncTx-r16	on		
}			
}			

Table 9.1.2.2.4.3-3: SL-SyncConfig (Table 9.1.2.2.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-31			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-SyncConfig-r16 ::= SEQUENCE {			
sl-SSID-r16	30		
}			
}			

9.1.2.2.5 Test requirement

SyncRef UE Specific test parameters for SyncRef UE 1 is given in Table 9.1.2.2.5-1.

Table 9.1.2.2.5-1: SyncRef UE Specific test parameters for NR SA FR1 initiation/cease of S-SSB transmission for SyncRef UE as synchronization reference source

Parameter	Unit	SyncRef UE 1		
		T1	T2	T3

NR RF Channel Number		1		
V2X SL communication resource pool configuration		As specified in section A.11.2		
Channel Bandwidth ($BW_{channel}$) Note3	MHz	20($N_{RB,c}$ = 50) or 40($N_{RB,c}$ = 100)		
SLSSID		30		
inCoverage		TRUE		
networkControlledSyncTx		ON		
Noc Note1	dBm/30 kHz	-99.35 Note 5	-102.55 Note 5	-99.35 Note 5
Ês/Noc	dB	5.5	-3.5	5.5
PSBCH Ês/Noc	dB	5.5	-3.5	5.5
PSBCH-RSRP Note2	dBm/30 kHz	-93.85	-106.05	-93.85
Io Note2	dBm /18MHz	-71.57	-79.74	-71.57
	dBm /36MHz	-71.57	-79.74	-71.57
Propagation condition		AWGN		

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 2: PSBCH-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Io level is based on the allocated RBs for S-PSS/S-SSS/PSBCH symbols.
Note 3: The UE is only required to be tested in one of the supported test configurations.
Note 4: S-PSS Es/Noc and S-SSS Es/Noc are set the same as PSBCH Es/Noc.
Note 5: Including the test tolerance given in Annex F.

During T1, the PSBCH-RSRP of SyncRef UE 1 is above *syncTxThreshOOC* and the UE is not expected to be transmitting S-SSB.

During T2, the PSBCH-RSRP of SyncRef UE 1 is lowered below *syncTxThreshOOC* and the UE is expected to initiate S-SSB transmissions.

During T3, the PSBCH-RSRP of SyncRef UE 1 is increased back to be above *syncTxThreshOOC* and the UE is expected to cease S-SSB transmissions.

The S-SSB transmission initiation delay is defined as the time from the beginning of time period T2 up to the moment when the UE initiates the S-SSB transmission.

The S-SSB transmission initiation delay shall be less than $T_{evaluate,SLSS}$ + S-SSB period = 800 ms, where,

$T_{evaluate,SLSS}$ = 4 · S-SSB period, is the evaluation time specified in 38.133 [6] clause 12.3.1.4,

S-SSB period = 160 ms.

The S-SSB transmission cease delay is defined as the time from the beginning of time period T3 up to the moment when the UE ceases the S-SSB transmission.

The S-SSB transmission cease delay shall be less than $T_{evaluate,SLSS}$ + S-SSB period = 800 ms.

The rate of correct initiation/cease delay of S-SSB transmissions observed during repeated tests shall be at least 90%.

9.1.3 Synchronization reference selection/reselection

9.1.3.0 Minimum conformance requirements

9.1.3.0.1 Minimum conformance requirements for GNSS configured as the highest priority synchronization reference source

The requirements defined in this clause do not apply to the UEs that do not support transmission and reception of SLSS.

A SyncRef UE is considered to be detectable when

- PSBCH-RSRP related side conditions given in 38.133 [6] clause 10.4 are fulfilled for a corresponding Band,

- S-SSB_RP and S-SSBÊs/Iot according to Annex B.4.3 for a corresponding Band are fulfilled.

When GNSS synchronization reference source is configured as the highest priority and

- UE is synchronized to GNSS directly,
  - UE shall not drop any NR SLSS and data transmission for the purpose of selection/reselection to the SyncRef UE.
- UE is synchronized to a SyncRef UE that is synchronized to GNSS directly or in-directly,
  - UE shall not drop any NR sidelink data transmission for the purpose of selection/reselection to the SyncRef UE. The UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{detect,SyncRef\ UE_V2X}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[13]. $T_{detect,SyncRef\ UE_V2X}$ is defined as 1.6 seconds at S-SSB Ês/Iot $\geq$ 0 dB, provided that the UE is allowed to drop a maximum of 30% of its SLSS transmissions during $T_{detect,SyncRef\ UE_V2X}$ for the purpose of selection / reselection to the SyncRef UE.
- in other case
  - The UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{detect,SyncRef\ UE_V2X}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[13]. $T_{detect,SyncRef\ UE_V2X}$ is defined as 8 seconds at S-SSB Ês/Iot $\geq$ 0 dB, provided that the UE is allowed to drop a maximum of 6 % of its NR sidelink data and SLSS transmissions during $T_{detect,SyncRef\ UE_V2X}$ for the purpose of selection / reselection to the SyncRef UE.
  - UE is allowed to drop up to 2 slots of its NR sidelink data reception per PSBCH monitoring occasion and overall drop rate shall not exceed 0.3% of its NR sidelink data reception during $T_{detect,SyncRef\ UE_V2X}$ for the purpose of selection / reselection to the SyncRef UE.

UE shall be capable of performing PSBCH-RSRP measurements for 3 identified intra-frequency SyncRef UEs with the measurement period of 320 ms. It is assumed that the SyncRef UE do not drop or delay any SLSS transmission within the measurement period. Otherwise, the measurement period may be extended.

When UE is synchronized to GNSS directly, before selection / reselection of the new synchronization reference source UE shall evaluate the GNSS synchronization source reliability for at least 20 seconds before changing the synchronization reference from GNSS to another synchronization reference source. UE shall be always synchronized to GNSS directly during the evaluation of GNSS synchronization source reliability.

The requirements for absolute accuracy of PSBCH-RSRP apply to a NR sidelink synchronization source on the same frequency as that of the own NR sidelink UE performing the measurement in FR1.

The accuracy requirements in Table 9.1.3.0.1-1 are valid under the following conditions:

- Demodulation reference signals are transmitted from one port.
- Conditions defined in Clause 7.3E of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for PSBCH-RSRP measurements are fulfilled according to Annex B.4.2 for a corresponding Band for each relevant PSBCH-DMRS.

Table 9.1.3.0.1-1: Intra-frequency PSBCH-RSRP absolute accuracy in FR1

Accuracy		Conditions						
			Io Note 1 range					
Normal condition	Extreme condition	Ês/Iot Note 3	NR Sidelink operating band groups Note 2	Minimum Io				Maximum Io
				dBm / SCS_{SL}				
dB	dB	dB		SCS_{SL} = 15 kHz	SCS_{SL} = 30 kHz	SCS_{SL} = 60 kHz	dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
±4.5	±9	≥-6	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-70
±8	±11	≥-6	NR_TDD_FR1_B,	N/A	N/A	N/A	-70	-50

			NR_TDD_FR1_J					
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR sidelink operating band groups in FR1 are as defined in clause 3.5.2. NOTE 3: Ês/Iot for a SyncRef UE is the Ês/Iot of PSBCH-DMRS.								

The relative accuracy of PSBCH-RSRP is defined as the PSBCH-RSRP measured from one NR sidelink synchronization source compared to the PSBCH-RSRP measured from another NR sidelink synchronization source on the same frequency in FR1.

The accuracy requirements in Table 9.1.3.0.1-2 are valid under the following conditions:

- Demodulation reference signals are transmitted from one port.
- Conditions defined in Clause 7.3E of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for PSBCH-RSRP accuracy measurements are fulfilled according to Annex B.4.2 for a corresponding Band for each relevant PSBCH-DMRS.

Table 9.1.3.0.1-2: Intra-frequency PSBCH-RSRP relative accuracy in FR1

Accuracy		**Conditions**						
			Io [Note 1] range					
Normal condition	**Extreme condition**	**Ês/Iot [Note 3]**	**NR sidelink operating band groups [Note 2]**	**Minimum Io**				**Maximum Io**
				dBm / SCS_{SL}				
dB	**dB**	**dB**		**SCS_{SL} = 15 kHz**	**SCS_{SL} = 30 kHz**	**SCS_{SL} = 60 kHz**	**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
±2	±3	≥-3	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-50
±3	±3	≥-6	Note 4	Note 4	Note 4	Note 4	N/A	Note 4
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR sidelink operating band groups in FR1 are as defined in clause 3A.4.1. NOTE 3: Ês/Iot for a SyncRef UE is the Ês/Iot of PSBCH-DMRS. NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.								

The normative references for this requirement are TS 38.133 [6] clause 10.4.2 and 12.4.

9.1.3.0.2 Minimum conformance requirements for eNB/gNB configured as the highest priority synchronization reference source

The requirements defined in this clause do not apply to the UEs that do not support transmission and reception of SLSS.

A SyncRef UE is considered to be detectable when

- PSBCH-RSRP related side conditions given in 38.133 [6] clause 10.4 are fulfilled for a corresponding Band,
- S-SSB_RP and S-SSB Ês/Iot according to Annex B.4.3 for a corresponding Band are fulfilled.

When serving cell/PCell synchronization reference source is configured as the highest priority,

- UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{detect,SyncRef\ UE_V2X}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331 [13]. $T_{detect,SyncRef\ UE_V2X}$ is defined as 8 seconds at S-SSB Ês/Iot $\geq$ 0 dB, provided that the NR sidelink UE is allowed to drop a maximum of 6 % of its NR sidelink data and SLSS transmissions for the purpose of selection / reselection to the SyncRef UE.
- UE is allowed to drop up to 2 slots of its NR sidelink data reception per PSBCH monitoring occasion and overall drop rate shall not exceed 0.3% of its NR sidelink data reception during $T_{detect,SyncRef\ UE_V2X}$ for the purpose of selection / reselection to the SyncRef UE.

UE shall be capable of performing PSBCH-RSRP measurements for 3 identified intra-frequency SyncRef UEs with the measurement period of 320 ms. It is assumed that the SyncRef UE do not drop or delay any SLSS transmission within the measurement period. Otherwise, the measurement period may be extended.

The requirements for absolute accuracy of PSBCH-RSRP apply to a NR sidelink synchronization source on the same frequency as that of the own NR sidelink UE performing the measurement in FR1.

The accuracy requirements in Table 9.1.3.0.2-1 are valid under the following conditions:

- Demodulation reference signals are transmitted from one port.
- Conditions defined in Clause 7.3E of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for PSBCH-RSRP measurements are fulfilled according to Annex B.4.2 for a corresponding Band for each relevant PSBCH-DMRS.

Table 9.1.3.0.2-1: Intra-frequency PSBCH-RSRP absolute accuracy in FR1

Accuracy		Conditions						
			Io [Note 1] range					
Normal condition	Extreme condition	Ês/Iot [Note 3]	NR Sidelink operating band groups [Note 2]	Minimum Io				Maximum Io
				dBm / SCS_{SL}				
dB	dB	dB		SCS_{SL} = 15 kHz	SCS_{SL} = 30 kHz	SCS_{SL} = 60 kHz	$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
±4.5	±9	≥-6	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-70
±8	±11	≥-6	NR_TDD_FR1_B, NR_TDD_FR1_J	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR sidelink operating band groups in FR1 are as defined in clause 3.5.2. NOTE 3: Ês/Iot for a SyncRef UE is the Ês/Iot of PSBCH-DMRS.								

The relative accuracy of PSBCH-RSRP is defined as the PSBCH-RSRP measured from one NR sidelink synchronization source compared to the PSBCH-RSRP measured from another NR sidelink synchronization source on the same frequency in FR1.

The accuracy requirements in Table 9.1.3.0.2-2 are valid under the following conditions:

- Demodulation reference signals are transmitted from one port.
- Conditions defined in Clause 7.3E of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for PSBCH-RSRP accuracy measurements are fulfilled according to Annex B.4.2 for a corresponding Band for each relevant PSBCH-DMRS.

Table 9.1.3.0.2-2: Intra-frequency PSBCH-RSRP relative accuracy in FR1

Accuracy		Conditions						
			Io [Note 1] range					
Normal condition	Extreme condition	Ês/Iot [Note 3]	NR sidelink operating band groups [Note 2]	Minimum Io				Maximum Io
				dBm / SCS_{SL}				
dB	dB	dB		SCS_{SL} = 15 kHz	SCS_{SL} = 30 kHz	SCS_{SL} = 60 kHz	$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
±2	±3	≥-3	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-50
±3	±3	≥-6	Note 4	Note 4	Note 4	Note 4	N/A	Note 4
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR sidelink operating band groups in FR1 are as defined in clause 3A.4.1.								

NOTE 3: Ês/Iot for a SyncRef UE is the Ês/Iot of PSBCH-DMRS.
NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.

9.1.3.1 NR SA FR1 synchronization reference selection/reselection for GNSS configured as the highest priority synchronization reference source

9.1.3.1.1 Test purpose

The purpose of this test is to verify the requirements related to SyncRef UE (re)selection as specified in TS 38.133 [6] clause 12.4, when GNSS is configured as the highest priority.

9.1.3.1.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting NR sidelink communication.

9.1.3.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.3.0.1

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.3.1.

9.1.3.1.4 Test description

9.1.3.1.4.1 Initial conditions

Configure the test equipment and the DUT according to the parameters in Table 9.1.3.1.4.1-1.

Table 9.1.3.1.4.1-1: Initial conditions for NR SA FR1 synchronization reference selection/reselection for GNSS configured as the highest priority synchronization reference source

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8.		
Channel bandwidth	PC5: As specified by the test configuration selected from Table 9.1.3.1.4.1-2.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.1	
Exceptions to connection diagram	GNSS System Simulator is not used.		

1. The parameter settings for the NR sidelink communication are pre-configured according to TS 38.508-1 [14] clause 4.10.1.
2. Message content exceptions are given in clause 9.1.3.1.4.3
3. There are three NR-SS-UEs (SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3) specified in this test. SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3 are configured according to the generic parameters in Table 9.1.3.1.4.1-2.

Table 9.1.3.1.4.1-2: NR sidelink test parameters for NR SA FR1 synchronization reference selection/reselection for GNSS configured as the highest priority synchronization reference source

Parameter		Unit	Value	Comment
Initial condition	Active synchronization source		Sync Ref UE 1	DUT transmits for NR Sidelink Communication and S-SSB with

				SLSS ID = 30 and in-coverage set as FALSE in MIB-SL.
T2 end condition	Active synchronization source		Sync Ref UE 2	DUT transmits for NR Sidelink Communication and S-SSB with SLSS ID = 336 and in-coverage set as FALSE in MIB-SL.
Final condition	Active synchronization source		Sync Ref UE 3	UE transmits for NR Sidelink Communication and S-SSB with SLSS ID = 0 and in-coverage set as FALSE in MIB-SL.
Active SyncRef UEs			SyncRef UE 1 SyncRef UE 2 SyncRef UE 3	Transmitting S-SSB on RF channel number 1 (HD carrier in Band n47 or n38)
Timing offset among SyncRef UEs		µs	CP/2	Synchronous
Frequency offset of SyncRef UE 1,2 and 3		ppm	0	
NR sidelink Communication configuration			As specified in clause A.11.2	IE values unless specified otherwise in this test.
sl-SyncPriority			gnss	
syncTxThreshOoC			+infinity	
T1		s	24	
T2		s	16	
T3		s	3.2	

9.1.3.1.4.2 Test procedure

In this test there are three active SyncRef UEs (SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3) and no GNSS signals nor Cells. The test system shall emulate SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3 to transmit S-SSB every S-SSB period with the SLSSIDs and inCoverage indicators specified in Table 9.1.3.1.5-1.

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3 are all switched off before starting the test. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

1. Ensure the UE is in state 4-A with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The UE transmits S-SSB with SLSSID belonging to id_oon set and *inCoverage* = false in SL MIB.
3. The SS sends AT command +CCUTLE to close test loop function and trigger UE to transmit.
4. The SS sets parameters according to T1 in Table 9.1.3.1.5-1. T1 starts.
5. If the UE

   a) starts to transmit S-SSB within 8800 ms from the start of T1 with SLSSID = 30 and *inCoverage* = false in *MasterInformationBlockSidelink*, and

   b) drops no more than 6 % of its PSSCH and S-SSB transmissions within 8000 ms from the start of T1.

   then count a success for the event "select SyncRef UE 1", otherwise count a fail for the event "select SyncRef UE 1".
6. When T1 expires, the SS shall switch the power setting from T1 to T2 in Table 9.1.3.1.5-1. T2 starts.
7. If the UE

   a) starts to transmit S-SSB within 8800 ms from the start of T2 with SLSSID = 336 and *inCoverage* = false in *MasterInformationBlockSidelink*, and

   b) drops no more than 6 % of its PSSCH and S-SSB transmissions within 8000 ms from the start of T2.

   then count a success for the event "reselect SyncRef UE 2", otherwise count a fail for the event "reselect SyncRef UE 2".
8. When T2 expires, the SS shall switch the power setting from T2 to T3 in Table 9.1.3.1.5-1. T3 starts.

9. If the UE

   a) starts to transmit S-SSB within 2400 ms from the start of T3 with SLSSID = 0 and *inCoverage* = false in *MasterInformationBlockSidelink*, and

   b) drops no more than 30 % of its S-SSB transmissions within 1600 ms from the start of T3.

   then count a success for the event "reselect SyncRef UE 3", otherwise count a fail for the event" reselect SyncRef UE 3".

10. When T3 expires, the SS shall switch off all three SyncRef UEs and wait at least 8 seconds.

11. The SS sends AT command +CCUTLE to open test loop function and trigger UE to stop transmitting.

12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

Each of the events " select SyncRef UE 1", " reselect SyncRef UE 2" and " reselect SyncRef UE 3" is evaluated independently for the statistic, resulting in an event verdict pass or fail. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

9.1.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.3.1.4.3-1: SL-ConfigDedicatedNR (SyncRef UE 1 and SyncRef UE 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-7 with condition SELECTED			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ConfigDedicatedNR-r16 ::= SEQUENCE {			
sl-PHY-MAC-RLC-Config-r16 SEQUENCE {			
sl-FreqInfoToAddModList-r16 SEQUENCE (SIZE (1..maxNrofFreqSL-r16)) OF SL-FreqConfig-r16 {	1 entry		
SL-FreqConfig-r16[1] SEQUENCE {		entry 1	
sl-SyncConfigList-r16 SEQUENCE (SIZE (1..maxSL-SyncConfig-r16)) OF SL-SyncConfig-r16 {	1 entry		
SL-SyncConfig-r16[1]	SL-SyncConfig	entry 1 Table 9.1.3.1.4.3-3	
}			
sl-SyncPriority-r16	gnbEnb		SyncRef UE 1
	gnss		SyncRef UE 3
}			
}			
networkControlledSyncTx-r16	on		
}			
}			

Table 9.1.3.1.4.3-2: SL-PreconfigurationNR (SyncRef UE 2)

Derivation Path: TS 38.508-1 [14], Table 4.10.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-PreconfigurationNR-r16 ::= SEQUENCE {			
sidelinkPreconfigNR-r16 SEQUENCE {			
sl-PreconfigFreqInfoList-r16 SEQUENCE (SIZE (1..maxNrofFreqSL-r16)) OF {	1 entry		
SL-FreqConfigCommon-r16[1] SEQUENCE {		entry 1	
sl-SyncConfigList-r16 SEQUENCE (SIZE (1..maxSL-SyncConfig-r16)) OF SL-SyncConfig-r16 {	1 entry		
SL-SyncConfig-r16[1]	SL-SyncConfig	entry 1 Table 9.1.3.1.4.3-3	
}			
}			

}			
}			
}			

Table 9.1.3.1.4.3-3: SL-SyncConfig (Table 9.1.3.1.4.3-1 and Table 9.1.3.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-31			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-SyncConfig-r16 ::= SEQUENCE {			
sl-SSID-r16	30		SyncRef UE 1
txParameters-r16 SEQUENCE {			SyncRef UE 2
syncTxThreshOoC-r16	13	the special value corresponding to +infinity	
}			
gnss-Sync-r16	true		SyncRef UE 2 SyncRef UE 3
}			

Table 9.1.3.1.4.3-4: SL-PreconfigurationNR (The UE under test)

Derivation Path: TS 38.508-1 [14], Table 4.10.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-PreconfigurationNR-r16 ::= SEQUENCE {			
sidelinkPreconfigNR-r16 SEQUENCE {			
sl-PreconfigFreqInfoList-r16 SEQUENCE (SIZE (1..maxNrofFreqSL-r16)) OF {	1 entry		
SL-FreqConfigCommon-r16[1] SEQUENCE {		entry 1	
sl-SyncConfigList-r16 SEQUENCE (SIZE (1..maxSL-SyncConfig-r16)) OF SL-SyncConfig-r16 {	1 entry		
SL-SyncConfig-r16[1] SEQUENCE {		entry 1	
sl-SyncRefMinHyst-r16	dB0		
sl-filterCoefficient-r16	fc0		
txParameters-r16 SEQUENCE {			
syncTxThreshOoC-r16	13	the special value corresponding to +infinity	
}			
}			
}			
}			
}			
}			
}			

Table 9.1.3.1.4.3-5: MasterInformationBlockSidelink (SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.1A-1			
Information Element	**Value/remark**	**Comment**	**Condition**
MasterInformationBlockSidelink ::= SEQUENCE {			
inCoverage-r16	true		SyncRef UE 1, SyncRef UE 3
	false		SyncRef UE 2
}			

Table 9.1.3.1.4.3-6: MasterInformationBlockSidelink (Test procedure, step 2,5 and 7, the UE under test)

Derivation Path: TS 38.508-1 [14], Table 4.6.1A-1 with condition TX			
Information Element	**Value/remark**	**Comment**	**Condition**
MasterInformationBlockSidelink ::= SEQUENCE {			
inCoverage-r16	false		
}			

Table 9.1.3.1.4.3-7: +CCUTLE (Test procedure, step 2)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Close and Transmit

Table 9.1.3.1.4.3-8: +CCUTLE (Test procedure, step 11)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Open

9.1.3.1.5 Test requirement

SyncRef UE Specific test parameters for SyncRef UEs are given in Table 9.1.3.1.5-1.

Table 9.1.3.1.5-1: SyncRef UE Specific Test Parameters for NR SA FR1 synchronization reference selection/reselection for GNSS configured as the highest priority synchronization reference source

Parameter	Unit	SyncRef UE 1			SyncRef UE 2			SyncRef UE 3		
		T1	T2	T3	T1	T2	T3	T1	T2	T3
NR RF Channel Number		1(HD carrier in Band n47 or n38)								
Channel Bandwidth ($BW_{channel}$) Note 4	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)								
V2X Sidelink Communication resource pool configuration		As specified in Table A.11.2-2								
networkControlledSyncTx		ON			N/A			ON		
syncTxThreshOoC	dBm/SCS	N/A			+∞			N/A		
SLSSID		30			0			0		
inCoverage (in MIB-SL)		TRUE			FALSE			TRUE		
N_{oc} Note1	dBm/SCS	-95								
$\hat{E}_s/N_{oc}$ Note2	dB	0.35 Note 5	0	0	−∞	0.35 Note 5	0	−∞	−∞	3.35 Note 5
$\hat{E}_s/I_{ot}$	dB	0.35	0	-5.00	−∞	0.35	0	−∞	−∞	0.34
Io Note2	dBm/18 MHz	-70.61	-70.78	-67.60	-73.79	-70.61	-70.78	-70.61	-70.78	-67.60
	dBm/36 MHz	-70.61	-70.78	-67.60	-73.79	-70.61	-70.78	-70.61	-70.78	-67.60
PSBCH-RSRP Note2, Note 3	dBm/SCS	-94.65	-95	-95	−∞	-94.65	-95	−∞	−∞	-91.65
Propagation Condition		AWGN								

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: $\hat{E}_s/I_{ot}$, Io, PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: S-PSS/S-SSS Es/Iot is set the same as PSBCH Es/Iot.
Note 4: The UE is only required to be tested in one of the supported test configurations.
Note 5: Including test tolerance given in Annex F.

During T1, the UE shall detect, evaluate and select SyncRef UE 1 as synchronization source. Then it shall change its S-SSB transmission timing with SLSSID = 30 and *inCoverage* = FALSE in *MasterInformationBlockSidelink* after SyncRef UE selection delay from start of T1.

During T2, the UE shall detect, evaluate and reselect SyncRef UE 2 as synchronization source. Then it shall change its S-SSB transmission timing with SLSSID = 336 and *inCoverage* = FALSE in *MasterInformationBlockSidelink* after SyncRef UE reselection delay from start of T2.

During T3, the UE will detect, evaluate and reselect SyncRef UE 3 as synchronization source. Then it shall change its S-SSB transmission timing with SLSSID = 0 and *inCoverage* = FALSE in *MasterInformationBlockSidelink* after SyncRef UE reselection delay from start of T2.

SyncRef UE (re)selection delay is defined as the time from the beginning of corresponding time instant to the time UE is synchronized to SyncRef UE and changes its S-SSB transmissions timing and SLSSID to follow SyncRef UE as the synchronization source. The SyncRef UE (re)selection delay can be expressed as:

SyncRef UE selection delay = $T_{detect,SyncRef\ UE}$ + $T_{evaluate,SLSS}$ + S-SSB period

- $T_{detect,SyncRef\ UE}$ = 1.6 seconds, is the time to identify newly detectable intra-frequency SyncRef UE as specified in 38.133 [6] clause 12.4 when UE is synchronized to a SyncRef UE that is synchronized to GNSS directly or in-directly, otherwise $T_{detect,SyncRef\ UE}$ = 8 seconds if UE is not directly synchronized to GNSS.
- $T_{evaluate,SLSS}$ = 4 S-SSB periods, is the time to measure the PSBCH-RSRP of the selected SyncRef UE used as synchronization reference source and evaluate it to initiate/cease S-SSB transmissions.
- S-SSB period = 160 ms.

Which gives SyncRef UE (re)selection delay = 8800 ms for T1 and T2, and 2400 ms for T3.

The test system will also verify that the UE does not drop or delay more than 6% of its sidelink data and S-SSB transmissions during the duration of T1 and T2, and does not drop or delay more than 30% of its S-SSB transmissions during the duration of T3.

The rate of correct SyncRef UE (re)selection observed during repeated tests shall be at least 90%.

9.1.3.2 NR SA FR1 synchronization reference selection/reselection for FR1 NR Cell configured as the highest priority synchronization reference source

9.1.3.2.1 Test purpose

The purpose of this test is to verify the requirements related to SyncRef UE (re)selection as specified in TS 38.133 [6] clause 12.4, when gNB is configured as the highest priority.

9.1.3.2.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting gNB as synchronization source and NR sidelink communication.

9.1.3.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.3.0.2

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.3.2.

9.1.3.2.4 Test description

9.1.3.2.4.1 Initial conditions

Configure the test equipment and the DUT according to the parameters in Table 9.1.3.2.4.1-1.

Table 9.1.3.2.4.1-1: Initial conditions for NR SA FR1 synchronization reference selection/reselection for FR1 NR Cell configured as the highest priority synchronization reference source

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8.	

Channel bandwidth	PC5: As specified by the test configuration selected from Table 9.1.3.2.4.1-2.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.1	
Exceptions to connection diagram	N/A		

1. The parameter settings for the NR sidelink communication are pre-configured according to TS 38.508-1 [14] clause 4.10.1.
2. Message content exceptions are given in clause 9.1.3.2.4.3
3. There are two NR-SS-UEs (SyncRef UE 1 and SyncRef UE 2) specified in this test. SyncRef UE 1 and SyncRef UE 2 are configured according to the generic parameters in Table 9.1.3.2.4.1-2.
4. The GNSS simulator is configured for Scenario #1: static in Geographical area #1, as defined in TS 38.508-1 [14] Table 4.11.2-2.

Table 9.1.3.2.4.1-2: NR sidelink test parameters for NR SA FR1 synchronization reference selection/reselection for FR1 NR Cell configured as the highest priority synchronization reference source

Parameter		Unit	Value	Comment
SCS		kHz	30	
Initial condition	Active synchronization source		GNSS	DUT transmits for NR Sidelink Communication and S-SSB with SLSSID = 0 and inCoverage set as TRUE in MIB-SL.
T2 end condition	Active synchronization source		Sync Ref UE 1	DUT transmits for NR Sidelink Communication and S-SSB with SLSSID = 395 and inCoverage set as FALSE in MIB-SL.
Final condition	Active synchronization source		Sync Ref UE 2	DUT transmits for V2X Sidelink Communication and S-SSB with SLSSID = 30 and inCoverage set as FALSE in MIB-SL.
Active cell			None	
Active SyncRef UEs			SyncRef UE 1 SyncRef UE 2	Transmitting S-SSB on RF channel number 1
Timing offset between SyncRef UE 1 and SyncRef UE 2		ms	3	Asynchronous
Frequency offset of SyncRef UE 1 and 2		ppm	0	
NR sidelink Communication preconfiguration			As specified in Clause A.11.2	IE values unless specified otherwise in this test.
syncPriority			gnb	
syncTxThreshOoC			13 (+infinity)	
T1		s	24	
T2		s	16	
T3		s	16	

9.1.3.2.4.2 Test procedure

In this test there are two active SyncRef UEs (SyncRef UE 1 and SyncRef UE 2). There are no active cells and GNSS is reliable during the whole test. The test system can emulate and send the GNSS signal to the test UE. The test system shall emulate SyncRef UE 1 and SyncRef UE 2 to transmit S-SSB every S-SSB period with the SLSSIDs and inCoverage indicators specified in Table 9.1.3.2.5-1.

The test consists of three successive time periods with time duration of T1, T2 and T3 respectively. SyncRef UE 1 and SyncRef UE 2 are all switched off before starting the test. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

1. Ensure the UE is in state 4-A with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1.
3. Wait at least 20 seconds for the UE to acquire the GNSS signal.
4. The SS sends AT command +CCUTLE to close test loop function and trigger UE to transmit.
5. The SS sets parameters according to T1 in Table 9.1.3.2.5-1. T1 starts.
6. The UE transmits S-SSB with SLSSID = 0 and *inCoverage* = true in *MasterInformationBlockSidelink*.
7. When T1 expires, the SS shall switch the power setting from T1 to T2 in Table 9.1.3.2.5-1. T2 starts.
8. If the UE

   a) starts to transmit S-SSB within 8800 ms from the start of T2 with SLSSID = 395 and *inCoverage* = false in *MasterInformationBlockSidelink*, and

   b) drops no more than 6 % of its PSSCH and S-SSB transmissions within 8000 ms from the start of T2

   then count a success for the event "reselect SyncRef UE 1", otherwise count a fail for the event "reselect SyncRef UE 1".

9 When T2 expires, the SS shall switch the power setting from T2 to T3 in Table 9.1.3.2.5-1. T3 starts.

10. If the UE

    a) starts to transmit S-SSB within 8800 ms from the start of T3 with SLSSID = 30 and *inCoverage* = false in *MasterInformationBlockSidelink*, and

    b) drops no more than 6 % of its PSSCH and S-SSB transmissions within 8000 ms from the start of T2

    then count a success for the event "reselect SyncRef UE 2", otherwise count a fail for the event" reselect SyncRef UE 2".

11. When T3 expires, the SS shall switch off all SyncRef UEs.
12. The SS sends AT command +CCUTLE to open test loop function and trigger UE to stop transmitting.
13. Repeat step 3-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

Each of the events " reselect SyncRef UE 1" and " reselect SyncRef UE 2" is evaluated independently for the statistic, resulting in an event verdict pass or fail. Different events may require different times for a verdict.

If all events pass, the test passes. If one event fails, the test fails.

9.1.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.3.2.4.3-1: SL-PreconfigurationNR (SyncRef UE 1)

Derivation Path: TS 38.508-1 [14], Table 4.10.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-PreconfigurationNR-r16 ::= SEQUENCE {			
sidelinkPreconfigNR-r16 SEQUENCE {			
sl-PreconfigFreqInfoList-r16 SEQUENCE (SIZE (1..maxNrofFreqSL-r16)) OF {	1 entry		
SL-FreqConfigCommon-r16[1] SEQUENCE {		entry 1	
sl-SyncPriority-r16	gnbEnb		
sl-SyncConfigList-r16 SEQUENCE (SIZE (1..maxSL-SyncConfig-r16)) OF SL-SyncConfig-r16 {	1 entry		
SL-SyncConfig-r16[1]	SL-SyncConfig	entry 1	

		Table 9.1.3.2.4.3-3	
}			
}			
}			
}			
}			

Table 9.1.3.2.4.3-2: SL-ConfigDedicatedNR (SyncRef UE 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-7 with condition SELECTED			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ConfigDedicatedNR-r16 ::= SEQUENCE {			
sl-PHY-MAC-RLC-Config-r16 SEQUENCE {			
sl-FreqInfoToAddModList-r16 SEQUENCE (SIZE (1..maxNrofFreqSL-r16)) OF SL-FreqConfig-r16 {	1 entry		
SL-FreqConfig-r16[1] SEQUENCE {		entry 1	
sl-SyncConfigList-r16 SEQUENCE (SIZE (1..maxSL-SyncConfig-r16)) OF SL-SyncConfig-r16 {	1 entry		
SL-SyncConfig-r16[1]	SL-SyncConfig	entry 1 Table 9.1.3.2.4.3-3	
}			
sl-SyncPriority-r16	gnbEnb		
}			
}			
networkControlledSyncTx-r16	on		
}			
}			

Table 9.1.3.2.4.3-3: SL-SyncConfig (Table 9.1.3.2.4.3-1 and Table 9.1.3.2.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-31			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-SyncConfig-r16 ::= SEQUENCE {			
sl-SSID-r16	30		SyncRef UE 2
txParameters-r16 SEQUENCE {			SyncRef UE 1
syncTxThreshOoC-r16	13	the special value corresponding to +infinity	
}			
}			

Table 9.1.3.2.4.3-4: SL-PreconfigurationNR (The UE under test)

Derivation Path: TS 38.508-1 [14], Table 4.10.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-PreconfigurationNR-r16 ::= SEQUENCE {			
sidelinkPreconfigNR-r16 SEQUENCE {			
sl-PreconfigFreqInfoList-r16 SEQUENCE (SIZE (1..maxNrofFreqSL-r16)) OF {	1 entry		
SL-FreqConfigCommon-r16[1] SEQUENCE {		entry 1	
sl-SyncPriority-r16	gnbEnb		
sl-SyncConfigList-r16 SEQUENCE (SIZE (1..maxSL-SyncConfig-r16)) OF SL-SyncConfig-r16 {	1 entry		
SL-SyncConfig-r16[1] SEQUENCE {		entry 1	
sl-SyncRefMinHyst-r16	dB0		
sl-filterCoefficient-r16	fc0		
txParameters-r16 SEQUENCE {			

syncTxThreshOoC-r16	13	the special value corresponding to +infinity	
}			
}			
}			
}			
}			
}			
}			

Table 9.1.3.2.4.3-5: MasterInformationBlockSidelink (SyncRef UE 1 and SyncRef UE 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.1A-1			
Information Element	**Value/remark**	**Comment**	**Condition**
MasterInformationBlockSidelink ::= SEQUENCE {			
inCoverage-r16	true		SyncRef UE 2,
	false		SyncRef UE 1
}			

Table 9.1.3.2.4.3-6: MasterInformationBlockSidelink (Test procedure, step 6,8 and 10, the UE under test)

Derivation Path: TS 38.508-1 [14], Table 4.6.1A-1 with condition TX			
Information Element	**Value/remark**	**Comment**	**Condition**
MasterInformationBlockSidelink ::= SEQUENCE {			
inCoverage-r16	true		Step 6
	false		Step 8, Step 10
}			

Table 9.1.3.2.4.3-7: +CCUTLE (Test procedure, step 4)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Close and Transmit

Table 9.1.3.2.4.3-8: +CCUTLE (Test procedure, step 12)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Open

9.1.3.2.5 Test requirement

SyncRef UE Specific test parameters for SyncRef UEs are given in Table 9.1.3.2.5-1.

Table 9.1.3.2.5-1: SyncRef UE Specific Test Parameters for NR SA FR1 synchronization reference selection/reselection for FR1 NR Cell configured as the highest priority synchronization reference source

Parameter	**Unit**	**SyncRef UE 1**			**SyncRef UE 2**		
		T1	**T2**	**T3**	**T1**	**T2**	**T3**
NR RF Channel Number		1(HD carrier in Band n47 or n38)					
Channel Bandwidth ($BW_{channel}$) Note 4	MHz	20($N_{RB,c}$ = 50) or 40($N_{RB,c}$ = 100)					
NR Sidelink Communication resource pool configuration		As specified in Table A.11.2-2			As specified in Table A.11.2-2		
networkControlledSyncTx		N/A			ON		
syncTxThreshOoC	dBm/15 kHz	+infinity			N/A		
SLSSID		59			30		
inCoverage (in MIB-SL)		FALSE			TRUE		
Noc Note1	dBm/30 kHz	-95					
Ês/Noc	dB	-∞	0	0	-∞	-∞	0

$\hat{E}_s/I_{ot}$	dB	-∞	0	0	-∞	-∞	0
PSBCH-RSRP Note2, Note 3	dBm/30 kHz	-∞	-95	-95	-∞	-∞	-95
Propagation Condition		AWGN					
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.							
Note 2: PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 3: S-PSS Es/Iot and S-SSS Es/Iot are set the same as PSBCH Es/Iot.							
Note 4: The UE is only required to be tested in one of the supported test configurations.							

During T1, both SyncRef UE 1 and SyncRef UE 2 are powered off. The UE will select GNSS as synchronization source.

During T2, the UE shall detect, evaluate and reselect SyncRef UE 1 as synchronization source. Then it shall change its S-SSB transmission timing with SLSSID = 395 and *inCoverage* = false in *MasterInformationBlockSidelink* after SyncRef UE reselection delay from start of T2.

During T3, the UE will detect, evaluate and reselect SyncRef UE 2 as synchronization source. Then it shall change its S-SSB transmission timing with SLSSID = 30 and *inCoverage* = false in *MasterInformationBlockSidelink* after SyncRef UE reselection delay from start of T2.

SyncRef UE reselection delay is defined as the time from the beginning of corresponding time instant to the time UE is synchronized to SyncRef UE and changes its S-SSB transmissions timing and SLSSID to follow SyncRef UE as the synchronization source. The SyncRef UE (re)selection delay can be expressed as:

SyncRef UE reselection delay = $T_{detect,SyncRef\ UE}$ + $T_{evaluate,SLSS}$ + S-SSB period

- $T_{detect,SyncRef\ UE}$ = 8 seconds, is the time to identify newly detectable intra-frequency SyncRef UE as specified in 38.133 [6] clause 12.4 when UE is not directly synchronized to GNSS.

- $T_{evaluate,SLSS}$ = 4 S-SSB periods, is the time to measure the PSBCH-RSRP of the selected SyncRef UE used as synchronization reference source and evaluate it to initiate/cease S-SSB transmissions.

- S-SSB period = 160 ms.

Which gives SyncRef UE reselection delay = 8800 ms.

The test system will also verify that the UE does not drop or delay more than 6% of its sidelink data and S-SSB transmissions during the duration of T1 and T2.

The rate of correct SyncRef UE reselection observed during repeated tests shall be at least 90%.

9.1.4 L1 SL-RSRP measurements

9.1.4.0 Minimum conformance requirements

9.1.4.0.1 Minimum conformance requirements for resource selection/reselection, re-evaluation and pre-emption

The UE physical layer shall be capable of performing the L1 SL-RSRP measurements on the carrier operating NR sidelink communication for determining the subset of resources to be excluded in PSSCH resource selection in sidelink transmission mode 2. The L1 SL-RSRP measurement period corresponds to one slot and the measurement shall meet the L1 SL-RSRP measurement accuracy requirement in 38.133 [6] clause 10.4.4. After resource (re-)selection procedure, re-evaluation is performed on the reserved resources by L1 SL-RSRP measurements before transmission of SCI with reservation when the conditions specified in TS 38.214 [9] are satisfied.

When the pre-emption mechanism is enabled for the resource pool that UE is monitoring and selecting resource from, after UE selects from the resource not excluded based on L1 SL-RSRP measurement procedure, the UE shall be capable of triggering reselection of already signalled resource(s) as a resource reservation when the conditions specified in TS 38.214 [9] are satisfied.

The requirements for absolute accuracy of L1 SL-RSRP in this clause apply to a UE performing PSCCH-RSRP and/or PSSCH-RSRP measurements on the same frequency as used by operating NR sidelink communication.

The accuracy requirements in Table 9.1.4.0.1-1 are valid under the following conditions:

- Demodulation reference signals for PSCCH and/or PSSCH are transmitted from one port.
- Conditions defined in clause 7.3E of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- PSCCH-RSRP|dBm and/or PSSCH-RSRP|dBm according to Annex B.4.4 for a corresponding Band are fulfilled.

Table 9.1.4.0.1-1: Intra-frequency L1 SL-RSRP absolute accuracy for UE capable of NR sidelink communication

Accuracy		Conditions						
			Io [Note 1] range					
Normal condition	Extreme condition	Ês/Iot [Note 3]	NR Sidelink operating band groups [Note 2]	Minimum Io				Maximum Io
				dBm/SCS			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
dB	dB	dB		SCS = 15kHz	SCS = 30kHz	SCS = 60kHz		
± 4.5	± 9	≥0 dB	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-70
± 8	± 11	≥0 dB	NR_TDD_FR1_B NR_TDD_FR1_J	N/A	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR sidelink operating band groups are as defined in Section 3.5 for the corresponding NR operating bands.
NOTE 3: The parameter Ês/Iot is the Ês/Iot of PSCCH-DMRS and/or PSSCH-DMRS.

The normative references for this requirement are TS 38.133 [6] clause 10.4.4 and 12.5.

9.1.4.1 NR SA FR1 L1 SL-RSRP measurement for autonomous resource selection/reselection

9.1.4.1.1 Test purpose

The purpose of this test is to verify the requirements related to autonomous resource selection / reselection for NR sidelink UE in mode 2 defined in TS 38.133 [6] clause 12.5.

9.1.4.1.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting and NR sidelink communication.

9.1.4.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.4.0.1

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.4.1.

9.1.4.1.4 Test description

9.1.4.1.4.1 Initial conditions

Configure the test equipment and the DUT according to the parameters in Table 9.1.4.1.4.1-1.

Table 9.1.4.1.4.1-1: Initial conditions for NR SA FR1 L1 SL-RSRP measurement for autonomous resource selection/reselection

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8.		
Channel bandwidth	PC5: As specified by the test configuration selected from Table 9.1.4.1.4.1-2.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.1	
Exceptions to connection diagram	N/A		

1. The parameter settings for the NR sidelink communication are pre-configured according to TS 38.508-1 [14] clause 4.10.1.
2. Message content exceptions are given in clause 9.1.4.1.4.3
3. There are 50 NR-SS-UEs (active sidelink UE i, i=0,1,...,49) specified in this test. active sidelink UE i, i=0,1,...,49, is configured according to the generic parameters in Table 9.1.4.1.4.1-2.
4. The GNSS simulator is configured for Scenario #1: static in Geographical area #1, as defined in TS 38.508-1 [14] Table 4.11.2-2.

Table 9.1.4.1.4.1-2: NR sidelink test parameters for NR SA FR1 L1 SL-RSRP measurement for autonomous resource selection/reselection

Parameter		Unit	Value	Comment
NR RF Channel Number			1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 2		MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS		kHz	30	
NR sidelink communication pre-configuration			As specified in clause A.11.2	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool			1111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213 [8])
sl-NumSubchannel-r16 included in SL-ResourcePool			5	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool			10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Number of Active Sidelink UEs			50	Active Sidelink UE i = 0, .., 49
SL-Thres-RSRP			15 Note 3	Corresponding -100 dBm as defined in Section 6.3.5 in TS 38.331[13] Same for all priority level pairs.
Active Sidelink UEs (UE i = 0, .., 49)	NR sidelink Communication preconfiguration		As specified in clause A.11.2	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1i} Note1	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within

				a SFN cycle (see TS 38.213 [8])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool		floor(i/10)x10	Indicates the lowest RB index of the subchannel with the lowest index. UE 0~9 start RB=0; UE 10~19 start RB=10; UE 20~29 start RB=20; UE 30~39 start RB=30; UE 40~49 start RB=40;
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Timing offset among Active Sidelink UEs		μs	CP/2	Synchronous
Note 1: $\{1_i\}$ is a sequence of nine 0's with one 1 in (mod(i,10)+1'th position. Note 2: The UE is only required to be tested in one of the supported test configurations. Note 3: Including test tolerance given in Annex F.				

9.1.4.1.4.2 Test procedure

In this test there are 50 active sidelink UEs (UE i, i=0,1,...,49). There are no active cells and GNSS is reliable during the whole test. The test system can emulate and send the GNSS signal to the test UE. DUT and all active sidelink UEs select GNSS as synchronization reference source. The test system shall emulate the active sidelink UEs to transmit PSCCH/PSSCH every 5ms as specified in Table 9.1.4.1.4.1-2.

The test consists of two successive time periods with time duration of T1, T2 respectively. T1 and T2 should be long enough. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

1. Ensure the UE is in state 4-A with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1.
3. Wait at least 20 seconds for the UE to acquire the GNSS signal.
4. The SS sends AT command +CCUTLE to close test loop function and trigger UE to transmit.
5. The SS switches on all sidelink UEs and sets parameters according to T1 in Table 9.1.4.1.5-1. T1 starts.
6. During T1, the SS records:
   - $N_{resource,\ total}$: the number of resources occupied by the PSSCH transmissions of the DUT on all subchannels.
   - $N_{resource,\ subch\ 2}$ the number of resources occupied by the PSSCH transmissions of the DUT on subchannel #2.

   If $N_{resource,\ subch\ 2}$ (corresponds to the "ne" in Annex G.2.3) and $N_{resource,\ total}$ (corresponds to the "ns" in Annex G.2.3) achieve the confidence level according to Tables G.2.3-1, T1 expires.
7. If the ratio $N_{resource,\ subch\ 2}$/ $N_{resource,\ total}$ is less than 10%, count a success for the event "subchannel #2 resource not available", otherwise count a fail for the event "subchannel #2 resource not available ".
8. When T1 expires, the SS shall switch the power setting from T1 to T2 in Table 9.1.4.1.5-1. T2 starts.
9. During T2, the SS records:
   - $N_{resource,\ total}$: the number of resources occupied by PSSCH transmission of the DUT on all subchannels.

- $N_{resource,\ non\text{-}subch\ 2}$ the number of resources occupied by PSSCH transmission of the DUT on subchannels other than subchannel #2.

If $N_{resource,\ non\text{-}subch\ 2}$ (corresponds to the "ne" in Annex G.2.3) and $N_{resource,\ total}$ (corresponds to the "ns" in Annex G.2.3) achieve the confidence level according to Tables G.2.3-1, T2 expires.

10. If the ratio $N_{resource,\ non\text{-}subch\ 2}/ N_{resource,\ total}$ is less than 10%, count a success for the event "subchannel #2 resource available", otherwise count a fail for the event " subchannel #2 resource available ".

12. When T2 expires, the SS sends AT command +CCUTLE to open test loop function and trigger UE to stop transmitting.

Each of the events " subchannel #2 resource not available" and " subchannel #2 resource available" is evaluated independently, resulting in an event verdict pass or fail. If all events pass, the test passes. If one event fails, the test fails.

9.1.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.4.1.4.3-1: SL-ResourcePool (UE under test)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-NumSubchannel-r16	5		
sl-UE-SelectedConfigRP-r16 SEQUENCE {			
sl-Thres-RSRP-List-r16 SEQUENCE (SIZE (64)) OF SL-Thres-RSRP-r16 {	64 entries		
SL-Thres-RSRP-r16[k, k=1,..64]	15	entry k actual value is -130 +2*15 = -100 dBm	
}			
}			
sl-PreemptionEnable-r16	Not present		
sl-TimeResource-r16	1111111111		
}			

Table 9.1.4.1.4.3-2: SL-ResourcePool (active sidelink UE 0 ~ 49)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-StartRB-Subchannel-r16	floor(i/10)x10	i is the index of active sidelink UE, i = 0, 1,..., 49	active sidelink UE i
sl-UE-SelectedConfigRP-r16 SEQUENCE {			
sl-Thres-RSRP-List-r16 SEQUENCE (SIZE (64)) OF SL-Thres-RSRP-r16 {	64 entries		
SL-Thres-RSRP-r16[k, k=1,..64]	0	entry k special value corresponds to -infinity	
}			
}			
sl-PreemptionEnable-r16	Not present		
sl-TimeResource-r16	$\{1_i\}$	$\{1_i\}$ is a sequence of nine 0's with one 1 in (mod(i,10)+1'th position.	active sidelink UE i
}			

Table 9.1.4.1.4.3-3: +CCUTLE (Test procedure, step 4)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Close and Transmit

Table 9.1.4.1.4.3-4: +CCUTLE (Test procedure, step 12)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Open

9.1.4.1.5 Test requirement

Active sidelink UE specific test parameters are given in Table 9.1.4.1.5-1.

Table 9.1.4.1.5-1: SyncRef UE Specific Test Parameters for NR SA FR1 L1 SL-RSRP measurement for autonomous resource selection/reselection

Parameter	Unit	Active Sidelink UE i (i = 0, .., 49)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth ($BW_{channel}$) Note 5	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
PSCCH RMC	-	CC.1A HD	
PSSCH RMC	-	CD.1A HD	
Noc Note1	dBm/30 kHz	-111	-121
Ês/Noc Note3	dB	10	
Ês/Iot Note2,3	dB	10	
Ês/Noc Note3	dB	20.55 Note 6	10
Ês/Iot Note2,3	dB	20.55	10.00
Ês/Noc Note4	dB	0.35 Note 6	30.55 Note 6
Ês/Iot Note2,4	dB	0	30.55
PSSCH-RSRP1 Note 2,3	dBm/SCS	-90.45	-111
PSSCH-RSRP2 Note 2,4	dBm/SCS	-110.65	-90.45
Io Note 2	dBm/18 MHz	-69.31	-63.62
	dBm/36 MHz	-69.31	-63.62
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 2: Es/Iot, PSSCH-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: For UE 20 to 29, occupying subchannel #2
Note 4: For UE 0 to 19 and 30 to 49, occupying subchannel #0/1/3/4
Note 5: The UE is only required to be tested in one of the supported test configurations.
Note 6 Including test tolerance given in Annex F.

During T1, the signal from test equipment are configured such that

- The measured PSSCH-RSRP for 10 active NR sidelink UEs(UE 20~UE 29) is above *SL-Thres-RSRP*. Then the resources occupied by these 10 active NR sidelink UEs (resources on subchannel #2) are expected to be excluded in the resource selection procedure and,

- The measured PSSCH-RSRP for other 40 active NR sidelink UEs(UE 0~UE 19, UE 30~UE 49) is below the *SL-Thres-RSRP*, and the resources occupied by these 40 active NR sidelink UEs (resources on subchannels other than subchannel #2) are expected to be included in the resource selection procedure.

The rate of PSSCH transmissions on the resources on subchannel #2 shall be less than 10% during T1.

During T2, the signal from test equipment are configured such that

- the measured PSSCH-RSRP for the 10 active NR sidelink UEs (UE 20~UE 29) is below *SL-Thres-RSRP*. Then the resources occupied by these 10 active NR sidelink UEs (resources on subchannel #2) are expected to be included in the resource selection procedure and,
- the measured PSSCH-RSRP for other 40 active NR sidelink UEs (UE 0~UE 19, UE 30~UE 49) is above *SL-Thres-RSRP*, and the resources occupied by these 40 active NR sidelink UEs (subchannels other than subchannel #2) are expected to be excluded in the resource selection procedure.

The rate of PSSCH transmissions on the resources on subchannel #2 shall be larger than 90% during T2.

Figure 9.1.4.1.5-2 shows the two different time durations and the corresponding variation of the power level in the active sidelink UEs to emulate change of candidate resource set.

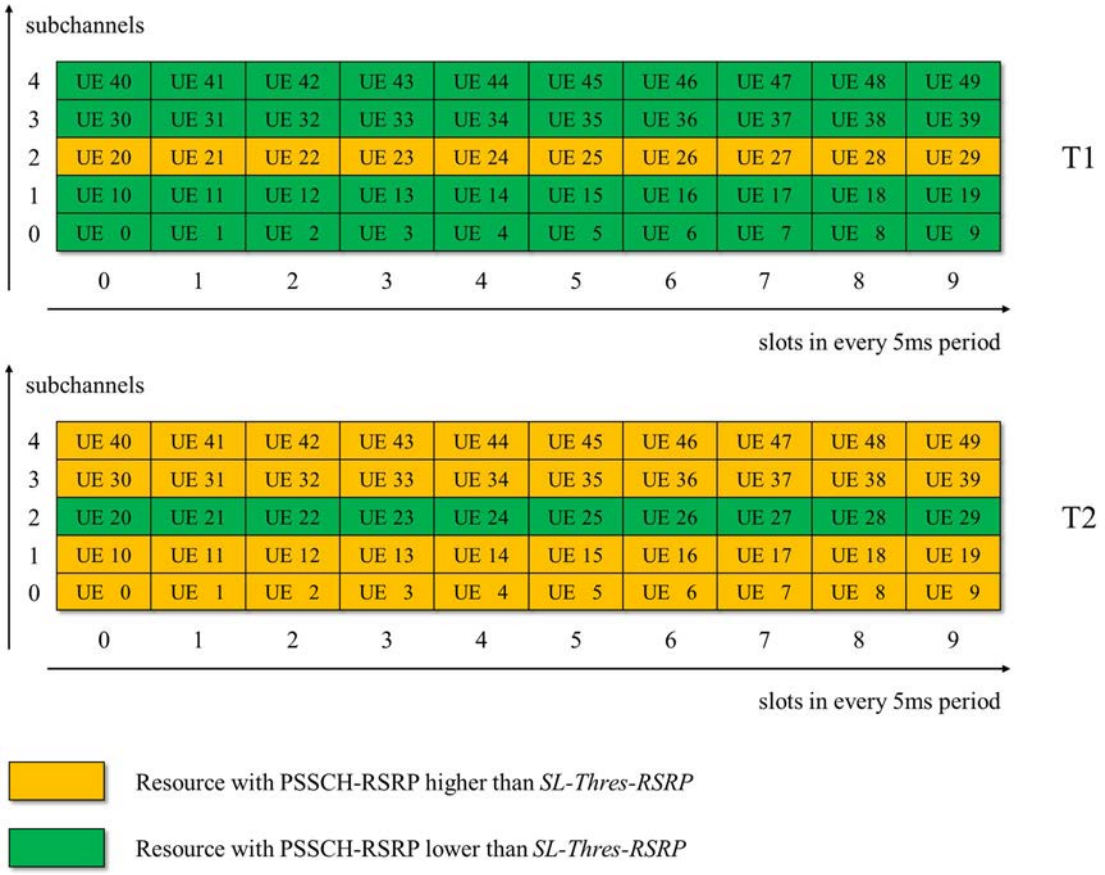

Figure 9.1.4.1.5-2: Power level variation of active sidelink UEs for NR SA FR1 L1 SL-RSRP measurement for autonomous resource selection/reselection

9.1.4.2 NR SA FR1 L1 SL-RSRP measurement for resource pre-emption

9.1.4.2.1 Test purpose

The purpose of this test is to verify the requirements related to autonomous resource pre-emption for NR sidelink UE in mode 2 defined in TS 38.133 [6] clause 12.5.

9.1.4.2.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting and NR sidelink communication.

9.1.4.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.4.0.1

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.4.2.

9.1.4.2.4 Test description

9.1.4.2.4.1 Initial conditions

Configure the test equipment and the DUT according to the parameters in Table 9.1.4.2.4.1-1.

Table 9.1.4.2.4.1-1: Initial conditions for NR SA FR1 L1 SL-RSRP measurement for resource pre-emption

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8.		
Channel bandwidth	PC5: As specified by the test configuration selected from Table 9.1.4.2.4.1-2.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.1	
Exceptions to connection diagram	N/A		

1. The parameter settings for the NR sidelink communication are pre-configured according to TS 38.508-1 [14] clause 4.10.1.
2. Message content exceptions are given in clause 9.1.4.2.4.3
3. There are 1 NR-SS-UEs (active NR sidelink UE) specified in this test. active NR sidelink UE is configured according to the generic parameters in Table 9.1.4.2.4.1-2.
4. The GNSS simulator is configured for Scenario #1: static in Geographical area #1, as defined in TS 38.508-1 [14] Table 4.11.2-2.

Table 9.1.4.2.4.1-2: NR sidelink test parameters for NR SA FR1 L1 SL-RSRP measurement for resource pre-emption

Parameter	Unit	Value	Comment
NR RF Channel Number		1	HD carrier in Band n47 and n38
Channel Bandwidth ($BW_{channel}$) Note 1	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
V2X sidelink communication pre-configuration		As specified in Annex A.11.2	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool in SL-ResourcePool in sl-TxPoolSelectedNormal-r16		10000000000000000000	Indicates the time resource of resource pool within *sl-Period*. (see TS 38.213 [8]) Note that this is for Tx pool.
sl-TimeResource-r16 included in SL-ResourcePool in sl-RxPool-r16		11111111111111111111	Indicates the time resource of resource pool within *sl-Period*. (see TS 38.213 [8]) Note that this is for Rx pool.
sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of subchannels in the corresponding resource pool, which consists of contiguous PRBs only

sl-SubchannelSize-r16 included in SL-ResourcePool			10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
sl-StartRB-Subchannel-r16 included in SL-ResourcePool			10	Indicates the lowest RB index of the subchannel with the lowest index.
Number of Active Sidelink UEs			1	
SL-Thres-RSRP			12	Corresponding -106 dBm as defined in Section 6.3.8 in TS38.331[13]
Active Sidelink UEs	V2X sidelink Communication preconfiguration		As specified in Annex A.11.2	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		1111111111111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[8])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool		0	Indicates the lowest RB index of the subchannel with the lowest index.
	Sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Timing offset among Active Sidelink Ues		μs	CP/2	Synchronous
Note 1: The UE is only required to be tested in one of the supported test configurations.				

9.1.4.2.4.2 Test procedure

In this test there is one active sidelink UE. There are no active cells and GNSS is reliable during the whole test. The test system can emulate and send the GNSS signal to the test UE. Both DUT and active sidelink UE select GNSS as synchronization reference source.

The test consists of two successive time periods with time duration of T1, T2 respectively. T1 and T2 should be long enough. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

1. Ensure the UE is in state 4-A with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1.
3. Wait at least 20 seconds for the UE to acquire the GNSS signal.
4. The SS sends AT command +CCUTLE to close test loop function and trigger UE to transmit.
5. The SS switches on active sidelink UE and sets parameters according to T1 in Table 9.1.4.2.5-1. T1 starts.
6. The SS keeps monitoring PSCCH sent by the UE. If the SS detecting a PSCCH sent by the UE which reserves multiple PSSCH resources, T1 expires.
7. When T1 expires, the SS shall switch the power setting from T1 to T2 in Table 9.1.4.2.5-1. T2 starts.
8. Denoting the slot occupied by the second PSCCH scheduled by the PSSCH in step 6 as "slot n". The active sidelink UE shall send PSCCH no later than slot n-5 which:

- indicates higher priority than the PSCCH in step 6, and
- schedules the same resource in slot n as the PSCCH in step 6.

9. If the UE sends no PSSCH on the resource in slot n, count a success for the test, otherwise count a fail for the test. T2 expires.
10. When T2 expires, the SS sends AT command +CCUTLE to open test loop function and trigger UE to stop transmitting
11. Repeat step 4-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved

9.1.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.4.2.4.3-1: SL-BWP-PoolConfigCommon (UE under test)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-BWP-PoolConfigCommon-r16 ::= SEQUENCE {			
sl-RxPool-r16 SEQUENCE (SIZE (1..maxNrofRXPool-r16)) OF SL-ResourcePool-r16 {	1 entry		
SL-ResourcePool-r16[1]	SL-ResourcePool-TX	entry 1 Table 9.1.4.2.4.3-2	
}			
sl-TxPoolSelectedNormal-r16 SEQUENCE (SIZE (1..maxNrofTXPool-r16)) OF SL-ResourcePoolConfig-r16 {	1 entry		
SL-ResourcePoolConfig-r16[1] SEQUENCE {		entry 1	
sl-ResourcePool-r16	SL-ResourcePool-RX	Table 9.1.4.2.4.3-3	
}			
}			
}			

Table 9.1.4.2.4.3-2: SL-ResourcePool-TX (Table 9.1.4.2.4.3-1)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-UE-SelectedConfigRP-r16 SEQUENCE {			
sl-Thres-RSRP-List-r16 SEQUENCE (SIZE (64)) OF SL-Thres-RSRP-r16 {	64 entries		
SL-Thres-RSRP-r16[k, k=1,..64]	12	entry k actual value is -130 +2*12 = -106 dBm	
}			
sl-MultiReserveResource-r16	enabled		
}			
sl-TimeResource-r16	1000000000000000000		
}			

Table 9.1.4.2.4.3-3: SL-ResourcePool-RX (Table 9.1.4.2.4.3-1)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-UE-SelectedConfigRP-r16 SEQUENCE {			
sl-Thres-RSRP-List-r16 SEQUENCE (SIZE (64)) OF SL-Thres-RSRP-r16 {	64 entries		
SL-Thres-RSRP-r16[k, k=1,..64]	12	entry k	

		actual value is -130 +2*12 = -106 dBm	
}			
sl-MultiReserveResource-r16	enabled		
}			
sl-TimeResource-r16	1111111111111111111		
}			

Table 9.1.4.2.4.3-4: SL-LogicalChannelConfig (UE under test)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-12 with condition LO			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-LogicalChannelConfig-r16 ::= SEQUENCE {			
sl-Priority-r16	8	PSSCH sents from DUT has the lowest priority	
}			

Table 9.1.4.2.4.3-5: SL-ResourcePool (active sidelink UE)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-TimeResource-r16	1111111111111111111		
}			

Table 9.1.4.2.4.3-6: +CCUTLE (Test procedure, step 4)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Close and Transmit

Table 9.1.4.2.4.3-7: +CCUTLE (Test procedure, step 10)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Open

9.1.4.2.5 Test requirement

Active sidelink UE specific test parameters are given in Table 9.1.4.2.5-1.

Table 9.1.4.2.5-1: SyncRef UE Specific Test Parameters for NR SA FR1 L1 SL-RSRP measurement for resource pre-emption

Parameter	Unit	Active Sidelink UE	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth ($BW_{channel}$) Note 3	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
PSCCH RMC	-	CC.1A HD	
PSSCH RMC	-	CD.1A HD	
Noc Note1	dBm/30 kHz	N/A	-100
PSCCH Ês/Noc	dB		5
PSSCH Ês/Noc	dB		5
PSCCH Ês/Iot Note2	dB		5
PSSCH Ês/Iot Note2	dB		5
PSSCH-RSRP Note 2	dBm/30kHz		-95

Io Note 2	dBm/18M Hz		-73.01
	dBm/36M Hz		-73.01
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	
Note 1: Interference from other Ues and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled. Note 2: Es/Iot, PSSCH-RSRP and Io have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: The UE is only required to be tested in one of the supported test configurations.			

During T1, The UE under test keep transmitting PSCCH/PSSCH and reserve resources in slot n for future transmission.

During T2, The UE under test is required to trigger resource reselection and not to transmit on the reserved resource at slot n when the high priority reservation is transmitted by the active sidelink UE before n-$T_{pre-empt}$, where,

$T_{pre-empt} = T_3 + T_{proc,0}$

- T_3 = 5 slots, is given in 38.214 Table 8.1.4-2.
- $T_{proc,0}$ = 1 slot, is given in 38.214 Table 8.1.4-1.

Which gives a total of $T_{pre-empt}$ = 6 slots.

The rate of PSSCH transmissions on the resources at slot n shall be less than 10% during repeated tests.

Figure 9.1.4.2.5-2 shows the two different time durations and the corresponding variation of the power level in the active sidelink UE to emulate resource pre-emption.

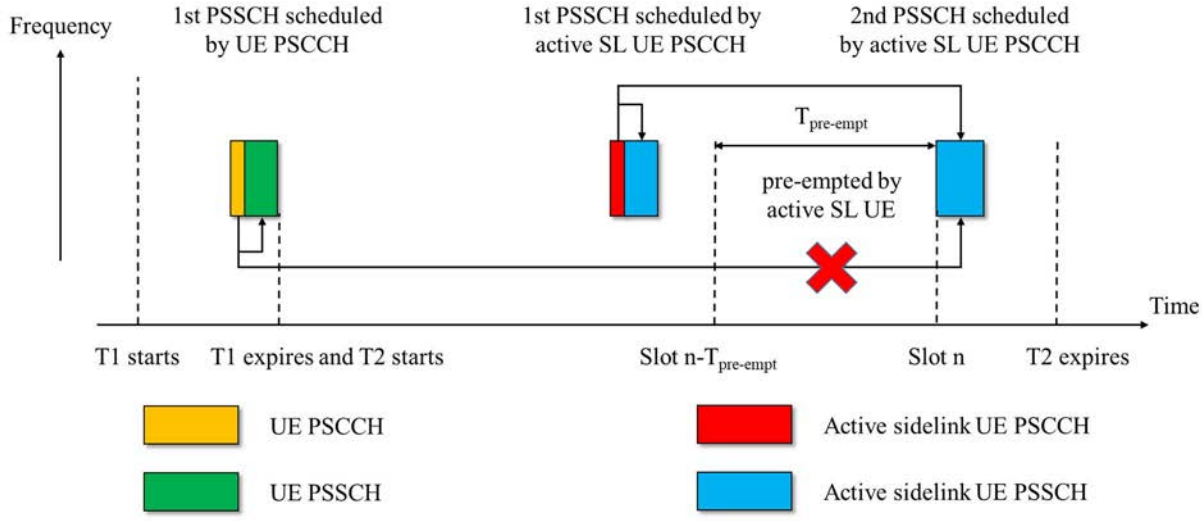

Figure 9.1.4.2.5-2: Power level variation of active sidelink UE for NR SA FR1 L1 SL-RSRP measurement for resource pre-emption

9.1.4.3 NR SA FR1 L1 SL-RSRP measurement for resource re-evaluation

9.1.4.3.1 Test purpose

The purpose of this test is to verify the requirements related to autonomous resource re-evaluation for NR sidelink UE in mode 2 defined in TS 38.133 [6] clause 12.5.

9.1.4.3.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting and NR sidelink communication.

9.1.4.3.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.4.0.1

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.4.3.

9.1.4.3.4 Test description

9.1.4.3.4.1 Initial conditions

Configure the test equipment and the DUT according to the parameters in Table 9.1.4.3.4.1-1.

Table 9.1.4.3.4.1-1: Initial conditions for NR SA FR1 L1 SL-RSRP measurement for resource re-evaluation

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8.		
Channel bandwidth	PC5: As specified by the test configuration selected from Table 9.1.4.3.4.1-2.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.1	
Exceptions to connection diagram	N/A		

1. The parameter settings for the NR sidelink communication are pre-configured according to TS 38.508-1 [14] clause 4.10.1.
2. Message content exceptions are given in clause 9.1.4.3.4.3
3. There are 130 NR-SS-UEs (active NR sidelink UE i, i = 0, 1, ..., 129) specified in this test. Active NR sidelink UEs are configured according to the generic parameters in Table 9.1.4.3.4.1-2.
4. The GNSS simulator is configured for Scenario #1: static in Geographical area #1, as defined in TS 38.508-1 [14] Table 4.11.2-2.

Table 9.1.4.3.4.1-2: NR sidelink test parameters for NR SA FR1 L1 SL-RSRP measurement for resource re-evaluation

Parameter	Unit	Value	Comment
NR RF Channel Number		1	HD carrier in Band n47 and n38
Channel Bandwidth ($BW_{channel}$) Note 2	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
V2X sidelink communication pre-configuration		As specified in Annex A.11.2	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool		1111111111111111111 1111111111111111111 1111111111111111111 1111111111111111111 1111111111111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool		10	
sl-StartRB-Subchannel-r16		0	

Number of Active Sidelink UEs			130	Active Sidelink UE i = 0, .., 129
SL-Thres-RSRP-r16			14[Note 3]	Corresponding -102 dBm as defined in Section 6.3.5 in TS38.331[2]
Active Sidelink UEs(UE i=0-99)	V2X sidelink Communication preconfiguration		As specified in Annex A.11.2	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1$_i$}[Note1]	Indicates the bitmap of the TX resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213 [3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the size of sub-channels for TX resource pool
	sl-ResourceReservePeriod2-r16	ms	50	
Active Sidelink UEs(UE i= 100-129)	V2X sidelink Communication preconfiguration		As specified in Annex A.11.2	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1$_i$}[Note1]	Indicates the bitmap of the TX resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213 [3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-SubchannelSize included in SL-ResourcePool		10	Indicates the size of sub-channels for TX resource pool
	sl-MultiReserveResource-r16		enabled	
	sl-MaxNumPerReserve-r16		n2	
	sl-ResourceReservePeriod2-r16		0	Unit:ms
Timing offset among Active Sidelink UEs		μs	CP/2	Synchronous
T0		s	1	
T1		ms	50	
T2		ms	50	
Note 1: {1$_i$} is a sequence of ninety-nine 0's with one 1 in (mod(i,100)+1)'th position. Note 2: The UE is only required to be tested in one of the supported test configurations. Note 3: Including the test tolerance given in Annex F.				

9.1.4.3.4.2 Test procedure

In this test there is 130 active sidelink UEs (denoted as UE i, i = 0,1,...,129). There are no active cells and GNSS is reliable during the whole test. The test system can emulate and send the GNSS signal to the test UE. DUT and all active sidelink UEs select GNSS as synchronization reference source. The first 100 active sidelink UEs are scheduled to send with 50ms periodicity. The last 30 active sidelink UEs are aperiodic service UE with reservation period of 15ms.

The test consists of three successive time periods with time duration of T0, T1 and T2 respectively. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

1. Ensure the UE is in state 4-A with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.

2. The GNSS simulator is triggered to start step 1 of Scenario #1 to simulate a location in the centre of Geographical area #1.

3. Wait at least 20 seconds for the UE to acquire the GNSS signal.
4. The SS switches on UE 0~UE 99, triggers UE 0 ~UE 99 to transmit PSCCH/PSSCH with 50ms periodicity, and set power level of UE 0~UE 99 to ensure their measured PSSCH-RSRP is higher than *SL-Thres-RSRP*. T0 starts.
5. When T0 expires, the SS sets parameters according to T1 in Table 9.1.4.3.5-1. T1 starts.
6. The SS sends AT command +CCUTLE to close test loop function and trigger UE to transmit at the end of T1.
7. When T1 expires, the SS shall switch the power setting from T1 to T2 in Table 9.1.4.3.5-1. T2 starts.
8. The SS switches off UE 0~UE 29, switches on UE 101~UE 129, and triggers UE 101~UE 129 to transmit PSCCH/PSSCH aperiodically with a time resource assignment interval of 15ms.
9. During T2, the SS accumulates:
   - $N_{resource, total}$: the number of resources occupied by the PSSCH transmissions of the DUT during T2 since the beginning of the test.
   - $N_{resource, 65-84}$ the number of resources in slot (i mod 100 = 65,66...,84) occupied by the PSSCH transmissions of the DUT during T2 since the beginning of the test.
10. When T2 expires, the SS sends AT command +CCUTLE to open test loop function and trigger UE to stop transmitting
11. The SS switches off all active sidelink UEs.
12. Repeat step 4-11 until $N_{resource, total}$ - $N_{resource, 65-84}$ (corresponds to the "ne" in Annex G.2.3) and $N_{resource, total}$ (corresponds to the "ns" in Annex G.2.3) achieve the confidence level according to Tables G.2.3-1.

If the ratio $N_{resource, 65-84}$/ $N_{resource, total}$ is larger than 90%, count a success for the test, otherwise count a fail for the test.

9.1.4.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.4.3.4.3-1: SL-ResourcePool (UE under test)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-UE-SelectedConfigRP-r16 SEQUENCE {			
sl-Thres-RSRP-List-r16 SEQUENCE (SIZE (64)) OF SL-Thres-RSRP-r16 {	64 entries		
SL-Thres-RSRP-r16[k, k=1,..64]	14	entry k actual value is -130 +2*14 = -102 dBm	
}			
sl-ResourceReservePeriodList-r16 SEQUENCE (SIZE (1..16)) OF SL-ResourceReservePeriod-r16 {	2 entries		
SL-ResourceReservePeriod-r16[1] CHOICE {		entry 1	
sl-ResourceReservePeriod1-r16	ms0		
}			
SL-ResourceReservePeriod-r16[2] CHOICE {		entry 2	
sl-ResourceReservePeriod2-r16	50		
}			
}			
}			
sl-PreemptionEnable-r16	Not present		
sl-TimeResource-r16	ones(1,100)	ones(1,100) is a sequence of 100 "1"s	
}			

Table 9.1.4.3.4.3-2: SL-ResourcePool (active sidelink UE 0~129)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-UE-SelectedConfigRP-r16 SEQUENCE {			
sl-Thres-RSRP-List-r16 SEQUENCE (SIZE (64)) OF SL-Thres-RSRP-r16 {	64 entries		
SL-Thres-RSRP-r16[k, k=1,..64]	14	entry k actual value is -130 +2*14 = -102 dBm	
}			
sl-MultiReserveResource-r16	Not present		sidelink UE 0~99
	enabled		sidelink UE 100~129
sl-ResourceReservePeriodList-r16 SEQUENCE (SIZE (1..16)) OF SL-ResourceReservePeriod-r16 {	2 entries		
SL-ResourceReservePeriod-r16[1] CHOICE {		entry 1	
sl-ResourceReservePeriod1-r16	ms0		
}			
SL-ResourceReservePeriod-r16[2] CHOICE {		entry 2	
sl-ResourceReservePeriod2-r16	50		
}			
}			
}			
sl-PreemptionEnable-r16	Not present		
sl-TimeResource-r16	$\{1_i\}$	$\{1_i\}$ is a sequence of ninety-nine 0's with one 1 in (mod(i,100)+1)'th position i = 0,1,...,129	sidelink UE i
}			

Table 9.1.4.3.4.3-3: Physical layer parameters for SCI format 1-A (Sidelink UE 0~129)

Derivation Path: TS 38.508-1 [14] Table 4.3.6.2.1.1-1			
Parameter	**Value**	**Value in binary**	**Condition**
Frequency resource assignment	Not present	-	
Time domain resource assignment	Indicates only one resource is scheduled	"00000"B	Sidelink UE 0~99
	Indicate 2 resources are scheduled and the time interval between the 1st resource and 2nd resource is 30 slot (i.e. 15ms)	"11110"B	Sidelink UE 10~129
Resource reservation period	Indicates the 2nd entry in sl-ResourceReservePeriodList, i.e. 50 ms	"1"B	Sidelink UE 0~99
	Indicates the 1st entry in sl-ResourceReservePeriodList, i.e. 0 ms	"0"B	Sidelink UE 10~129

Table 9.1.4.3.4.3-4: +CCUTLE (Test procedure, step 6)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Close and Transmit

Table 9.1.4.3.4.3-5: +CCUTLE (Test procedure, step 10)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Open

9.1.4.3.5 Test requirement

Active sidelink UE specific test parameters for UE 0~UE 99 and UE 100~UE 129 are given in Table 9.1.4.3.5-1 and Table 9.1.4.3.5-2 respectively.

Table 9.1.4.3.5-1: SyncRef UE Specific Test Parameters for NR SA FR1 L1 SL-RSRP measurement for resource re-evaluation (UE #0...99)

Parameter	Unit	Active Sidelink UE i (i = 0, .., 99)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth ($BW_{channel}$) Note 7	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
PSCCH RMC	-	CC.1A HD	
PSSCH RMC	-	CD.1A HD	
Noc Note1	dBm/SCS	-110.05 Note 13	
PSSCH1 Ês/Noc Note 3	dB	32.60 Note 13	32.60 Note 13
PSSCH2 Ês/Noc Note 4	dB	2	2
PSSCH3 Ês/Noc Note 5	dB	14.10 Note 13	-infinity
PSSCH4 Ês/Noc Note 6	dB	14.1 Note 13	14.10 Note 13
PSSCH1 Ês/Iot Note2,3,10	dB	32.60	-0.45
PSSCH1 Ês/Iot Note2,3,11		32.60	32.60
PSSCH2 Ês/Iot Note2,4	dB	2	-31.05
PSSCH3 Ês/Iot Note2,5	dB	14.10	-infinity
PSSCH4 Ês/Iot Note2,6	dB	14.10	14.10
PSSCH -RSRP1 Note 2, 3	dBm/SCS	-77.45	-77.45
PSSCH -RSRP2 Note 2, 4	dBm/SCS	-108.05	-108.05
PSSCH -RSRP3 Note 2, 5	dBm/SCS	-95.95	-infinity
PSSCH -RSRP4 Note 2, 6	dBm/SCS	-95.95	-95.95
Io Note 2, 8	dBm/18 MHz	-74.99	-56.21
	dBm/36 MHz	-74.99	-56.21
Io Note 2, 9	dBm/18 MHz	-85.13	-56.20
	dBm/36 MHz	-85.13	-56.20
Io Note 2, 10	dBm/18 MHz	-56.66	-53.42
	dBm/36 MHz	-56.66	-53.42
Io Note 2, 11	dBm/18 MHz	-56.66	-56.66
	dBm/36 MHz	-56.66	-56.66
Io Note 2, 12	dBm/18 MHz	-74.99	-74.99
	dBm/36 MHz	-74.99	-74.99
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 2: Ês/Iot, PSSCH-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: UE #50~64 and UE #85~99 will periodically occupy the subchannels on the slot with "#slot index mod 100" = #50-64 and #85-99.
Note 4: UE #30~49 will periodically occupy the subchannels on the slot with “#slot index mod 100” = #30-49.
Note 5: UE #0~29 will periodically occupy the subchannels on the slot with “#slot index mod 100” = #0-29.
Note 6: UE #65~84 will periodically occupy the subchannels on the slot with “#slot index mod 100” = #65-84.
Note 7: The UE is only required to be tested in one of the supported configurations.
Note 8: Calculated on slot with “#slot index mod 100” = #0~29.
Note 9: Calculated on slot with “#slot index mod 100” = #30~49.
Note 10: Calculated on slot with “#slot index mod 100” = #50~59.
Note 11: Calculated on slot with “#slot index mod 100” = #60~64 and slot #85~99.
Note 12: Calculated on slot with “#slot index mod 100” = #65~84.
Note 13 Including test tolerance given in Annex F.

Table 9.1.4.3.5-2: SyncRef UE Specific Test Parameters for NR SA FR1 L1 SL-RSRP measurement for resource re-evaluation (UE #100...129)

Parameter	Unit	Active Sidelink UE i (i = 100, ..., 129)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth ($BW_{channel}$) Note 4	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
PSCCH RMC	-	CC.1A HD	
PSSCH RMC	-	CD.1 A HD	
Noc Note1	dBm/SCS	-110.05Note 8	
PSSCH Ês/Noc	dB	-infinity	33.05 Note 8
PSSCH Ês/Iot Note2,5	dB	-infinity	33.05
PSSCH Ês/Iot Note2,6		-infinity	28.93
PSSCH Ês/Iot Note2,7		-infinity	0.45
PSSCH-RSRP Note 2, Note 3	dBm/SCS	-infinity	-77.0
Io Note 2, 5	dBm/18 MHz	-74.99	-56.21
	dBm/36 MHz	-74.99	-56.21
Io Note 2, 6	dBm/18 MHz	-85.13	-56.20
	dBm/36 MHz	-85.13	-56.20
Io Note 2, 7	dBm/18 MHz	-56.66	-53.42
	dBm/36 MHz	-56.66	-53.42
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 2: Es/Iot, PSSCH-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: UE #100~129 will occupy the subchannels on the slots with "#slot index mod 100"= #0-29 during T2.
Note 4: The UE is only required to be tested in one of the supported configurations.
Note 5: Calculated on slot with "#slot index mod 100" = #0~29.
Note 6: Calculated on slot with "#slot index mod 100" = #30~49.
Note 7: Calculated on slot with "#slot index mod 100" = #50~59.
Note 8: Including the test tolerance given in Annex F.

During T0, the SS shall configure UE 0~UE 99 to transmit PSCCH/PSSCH every 50ms. The measured PSSCH-RSRP of UE 0 ~UE 99 is above *SL-Thres-RSRP*. Hence the resources occupied by UE 0 ~UE 99 are expected to be excluded in the resource selection procedure.

During T1, the SS shall configure UE 0~UE 99 to transmit PSCCH/PSSCH every 50ms. The measured PSSCH-RSRP of UE 0~UE 29, UE 50 ~ UE 99 is above *SL-Thres-RSRP*, and the measured PSSCH-RSRP of UE 30~UE 49 is below *SL-Thres-RSRP*. Hence the resource occupied by UE 30 ~UE 49 are expected to be included in the resource selection procedure and other resources are expected to be excluded in the resource selection procedure.

At the end of T1, the UE under test shall be triggered to periodically transmit PSCCH/PSSCH.

During T2, the SS switches off UE 0~UE 29. and switches on UE 100~UE 129. UE 100~UE 129 transmit PSCCH/PSSCH with the maximum number of reserved PSCCH/PSSCH resources equalling n2 and time resource assignment interval as 15ms in the beginning 30 slots. The measured PSSCH-RSRP of UE 100~UE 129 is above *SL-Thres-RSRP*. Hence the resource occupied by UE 100 ~UE 129 are expected to be excluded in the resource re-evaluation procedure. The UE under test is expected to reselect the resources and transmit the PSCCH/PSSCH in the newly re-evaluated resources.

The rate of PSSCH transmissions on the resources which are occupied by UE #65-84 shall be more than 90% during T2.

Figure 9.1.4.3.5-3 shows the two different time durations and the corresponding variation of the power level in the active sidelink UEs to emulate change of candidate resource set.

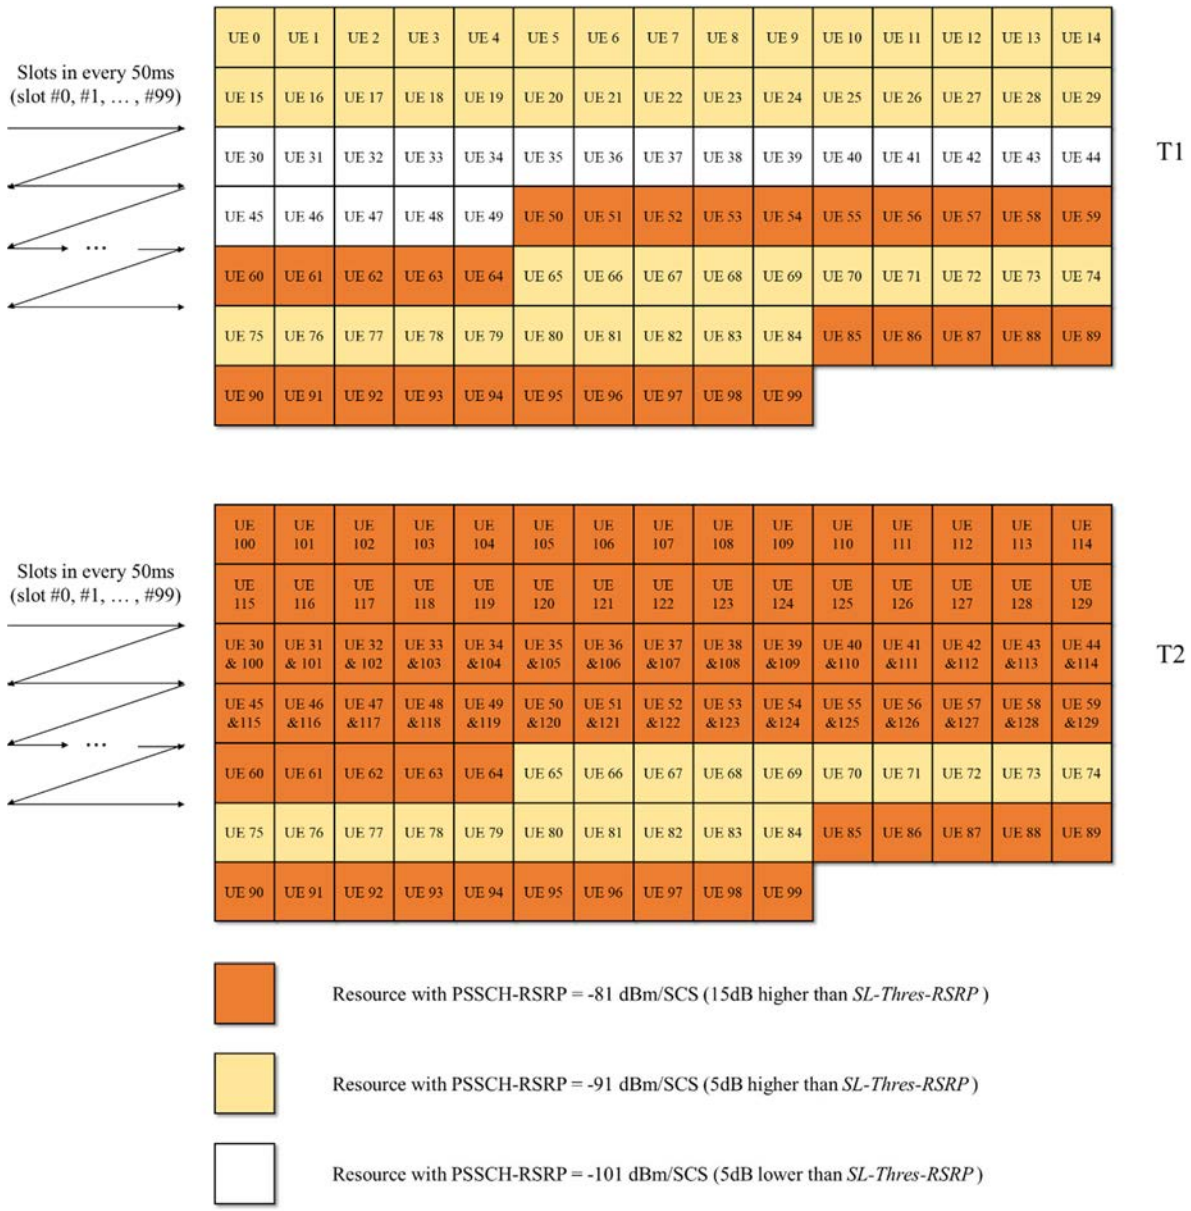

Figure 9.1.4.3.5-3: Power level variation of active sidelink UEs for NR SA FR1 L1 SL-RSRP measurement for resource re-evaluation

9.1.5 Congestion control measurement

9.1.5.0 Minimum conformance requirements

9.1.5.0.1 Minimum conformance requirements for congestion control measurements

The UE shall be capable of estimating the channel busy ratio for one or more transmission pools indicated by higher layers in TS 38.331[13], based on SL-RSSI measurements provided by the physical layer.

When no sidelink transmissions occur, the UE physical layer shall perform a single-shot SL-RSSI measurement for each sub-channel included in all the slots configured as transmission pools.

The SL-RSSI measurement performed according to this clause shall meet the SL-RSSI measurement accuracy requirements defined in 38.133 [6] clause 10.4.

The UE shall perform channel busy ratio (CBR) measurement based on SL-RSSI measurements as described in TS 38.215 [10].

The intra-frequency SL-RSSI requirements are specified in Table 9.1.5.0.1-1. The requirements apply for measurement period of 1 slot and for any configured measurement bandwidth larger than 10 RBs, provided that:

- All symbols during each RSSI measurement duration are available for RSSI sampling within the same measurement interval.

Table 9.1.5.0.1-1: Intra-frequency SL-RSSI absolute accuracy

Accuracy		Conditions				
		Io Note 1 range				
Normal condition	Extreme condition	NR sidelink operating band groups Note 2	Minimum Io			Maximum Io
			dBm/SCS_{SL}			
dB	dB		SCS_{SL} = 15kHz	SCS_{SL} = 30kHz	SCS_{SL} = 60kHz	dBm/$BW_{Channel}$
±2.5	±5.5	NR_TDD_FR1_B	-120.5	-117.5	-114.5	-50
		NR_TDD_FR1_J	-116.5	-113.5	-110.5	-50
±4.5	±7.5	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR sidelink operating band groups are as defined in Section 3A.4 for the corresponding NR operating bands.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.

The normative references for this requirement are TS 38.133 [6] clause 10.4.3 and 12.6.

9.1.5.1 NR SA FR1 congestion control measurement for concurrent operation

9.1.5.1.1 Test purpose

The purpose of this test is to verify the congestion control measurement requirements in TS 38.133 [6] clause 12.6. This test will also verify that UE makes correct reporting of an event for CBR measurement.

9.1.5.1.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting both Uu and sidelink communication.

9.1.5.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.5.0.1

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.5.

9.1.5.1.4 Test description

9.1.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 9.1.5.1.4.1-1.

Table 9.1.5.1.4.1-1: Supported test configurations for FR1 NR Cell

Configuration	Description
9.1.5.1-1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz

9.1.5.1-2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
9.1.5.1-3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 9.1.5.1.4.1-2.

Table 9.1.5.1.4.1-2: Initial conditions for NR SA FR1 congestion control measurement for concurrent operation

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	Uu&PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8.2.1.		
Channel bandwidth	Uu: As specified by the test configuration selected from Table 9.1.5.1.4.1-1 PC5: As specified by the test configuration selected from Table 9.1.5.1.4.1-3.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.3	
Exceptions to connection diagram	N/A		

1. The parameter settings for the NR sidelink communication are pre-configured according to TS 38.508-1 [14] clause 4.10.1.
2. Message content exceptions are given in clause 9.1.5.1.4.3
3. There is one NR Uu carrier and one NR Cell (Cell 1) specified in this test. Cell 1 is configured according to Annex C.1.1 and C.1.2.
4. Test parameters for Cell 1 are given in Table 9.1.5.1.5-2.
5. There are 4 NR-SS-UEs (active NR sidelink UE i, i = 0,1,2,3) specified in this test. Active NR sidelink UEs are configured according to the generic parameters in Table 9.1.5.1.4.1-3.

Table 9.1.5.1.4.1-3: NR sidelink test parameters for NR SA FR1 congestion control measurement for concurrent operation

Parameter	Unit	Value	Comment
NR RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$)[Note 2]	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS	kHz	30	
V2X sidelink communication configuration		As specified in Annex A.11.2	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool		1111111111111111111 1111111111111111111 1111111111111111111 1111111111111111111 1111111111111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[8])
sl-NumSubchannel-r16 included in SL-ResourcePool		1	ENUMERATED {n1}
sl-SubchannelSize included in SL-ResourcePool		10	ENUMERATED {n10}
sl-StartRB-Subchannel-r16		0	
threshS-RSSI-CBR		19	Corresponding -74dBm as defined in Section 6.3.8 in TS38.331[13]
Number of Active Sidelink UEs every 50ms		4	Active Sidelink UE i, where i = 0, 1, 2, 3

Active Sidelink UEs (i = 0,1,2,3)	V2X sidelink Communication configuration		As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		$\{1_i\}^{Note1}$	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[8])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	
	sl-SubchannelSize included in SL-ResourcePool		10	
Timing offset between V2X UE and Active Sidelink UEs		µs	CP/2	Synchronous
c1-Threshold-r16			2	Corresponding 0.02 as defined in Section 6.3.2 in TS38.331[13]
Hysteresis			0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
T1		s	5	
T2		s	5	
Note 1: $\{1_i\}$ is a sequence of ninety nine 0's with one 1 in i+1'th position. Note 2: The UE is only required to be tested in one of the channel bandwidths.				

9.1.5.1.4.2 Test procedure

In this test there is 4 active sidelink UEs (denoted as UE i, i = 0,1,2,3). There are 1 active cells (Cell 1) and no GNSS during the whole test. DUT and all active sidelink UEs select Cell 1 as synchronization reference source. All active sidelink UEs are scheduled to transmit PSCCH/PSSCH with 50ms periodicity.

The test consists of two successive time periods with time duration of T1 and T2 respectively.

1. Ensure the UE is in state 3N-B with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The SS switches on all active sidelink UEs, triggers all active sidelink UEs to transmit PSCCH/PSSCH with 50ms periodicity.
3. The SS sets parameters according to T1 in Table 9.1.5.1.5-1. T1 starts.
4. The SS sends a *RRCReconfiguration* message with *sl-ConfigDedicatedNR* and *measConfig* to configure event C1 triggered CBR measurement and reporting.
5. The UE sends a *RRCReconfigurationComplete* message.
6. If the UE send no *measurmentReport* message before T1 expires, then count a success for the event "entry condition is not satisfied", otherwise count a fail for the event "entry condition is not satisfied".
7. When T1 expires, the SS shall switch the power setting from T1 to T2 in Table 9.1.5.1.5-1. T2 starts.
8. If the UE sends a *measurmentReport* message before T2 expires, then count a success for the event "entry condition is satisfied", otherwise count a fail for the event "entry condition is satisfied".
9. The SS sends a *RRCReconfiguration* message with *measConfig* to release configure event C1 triggered CBR measurement and reporting.
10. The UE sends a *RRCReconfigurationComplete* message.
11. Repeat step 3-10 until the confidence level according to Table G.3.3-1 is achieved.

9.1.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.5.1.4.3-1: RRCReconfiguration (Test procedure, step 4 and step 9)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SIDELINK			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 9.1.5.1.4.3-2	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
sl-ConfigDedicatedNR-r16	SL-ConfigDedicatedNR specified in 38.508-1 [14] Table 4.6.6-7 with condition SELECTED		Step 4
	Not present		Step 9
}			
}			
}			
}			
}			
}			
}			

Table 9.1.5.1.4.3-2: MeasConfig (Table 9.1.5.1.4.3-1)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-69			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig ::= SEQUENCE {			
measObjectToAddModList	Not present		step 9
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasObjectToAddMod {	2 entries		step 4
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT specified in Table H.3.1-3 with condition INTRA-FREQ MO	MO for PCell	
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		entry 2	
measObjectId	2		
measObject CHOICE {			
measObjectNR-SL-r16	MeasObjectNR-SL specified in 38.508-1 [14] Table 4.6.3-76A	MO for CBR	
}			
}			
}			
reportConfigToAddModList	Not present		step 9
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		step 4
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			

reportConfigNR-SL-r16	ReportConfigNR-SL	Table 9.1.5.1.4.3-3	
}			
}			
}			
measIdToRemoveList	Not present		step 4
measIdToRemoveList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasId {	1 entry		step 9
MeasId[1]	1	entry 1	
}			
measIdToAddModList	Not present		step 9
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	1 entry		step 4
MeasIdToAddMod[1] SEQUENCE {		entry 1	
measId	1		
measObjectId	2		
reportConfigId	1		
}			
}			

Table 9.1.5.1.4.3-3: ReportConfigNR-SL (Table 9.1.5.1.4.3-2)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-142A with condition EVENT_C1			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR-SL-r16 ::= SEQUENCE {			
reportType-r16 CHOICE {			
eventTriggered-r16 SEQUENCE {			
eventId-r16 CHOICE {			
eventC1 SEQUENCE {			
c1-Threshold-r16	2	actual CBR threshold value is 2*0.01 = 2%	
hysteresis-r16	0		
timeToTrigger-r16	ms0		
}			
}			
}			
}			
}			

Table 9.1.5.1.4.3-4: SL-ResourcePool (UE under test)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-ThreshS-RSSI-CBR-r16	19	actual value is -112 + 2*19 = -74 dBm	
sl-UE-SelectedConfigRP-r16 SEQUENCE {			
sl-ResourceReservePeriodList-r16 SEQUENCE (SIZE (1..16)) OF SL-ResourceReservePeriod-r16 {	2 entries		
SL-ResourceReservePeriod-r16[1] CHOICE {		entry 1	
sl-ResourceReservePeriod1-r16	ms0		
}			
SL-ResourceReservePeriod-r16[2] CHOICE {		entry 2	
sl-ResourceReservePeriod2-r16	50		
}			
}			
}			
sl-FilterCoefficient-r16	fc0	L3 filtering is disabled	
sl-TimeResource-r16	ones(1,100)	ones(1,100) is a sequence of 100 "1"s	

}			

Table 9.1.5.1.4.3-5: SL-ResourcePool (active sidelink UE 0~3)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-UE-SelectedConfigRP-r16 SEQUENCE {			
sl-ResourceReservePeriodList-r16 SEQUENCE (SIZE (1..16)) OF SL-ResourceReservePeriod-r16 {	2 entries		
SL-ResourceReservePeriod-r16[1] CHOICE {		entry 1	
sl-ResourceReservePeriod1-r16	ms0		
}			
SL-ResourceReservePeriod-r16[2] CHOICE {		entry 2	
sl-ResourceReservePeriod2-r16	50		
}			
}			
}			
sl-TimeResource-r16	{1_i}	{1_i} is a sequence of ninety-nine 0's with one 1 in (mod(i,100)+1)'th position i = 0,1,2,3	sidelink UE i
}			

Table 9.1.5.1.4.3-6: Physical layer parameters for SCI format 1-A (Sidelink UE 0~3)

Derivation Path: TS 38.508-1 [14] Table 4.3.6.2.1.1-1			
Parameter	**Value**	**Value in binary**	**Condition**
Frequency resource assignment	Not present	-	
Time domain resource assignment	Indicates only one resource is scheduled	"00000"B	
Resource reservation period	Indicates the 2nd entry in sl-ResourceReservePeriodList, i.e. 50 ms	"1"B	

Table 9.1.5.1.4.3-7: MeasurementReport (Test procedure, step 8)

Derivation Path: TS 38.38.508-1[14] Table 4.6.1-5A			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasurementReport ::= SEQUENCE {			
criticalExtensions CHOICE {			
measurementReport SEQUENCE {			
measResults SEQUENCE {	MeasResults		
measId	1		
measResultServingMOList	Not checked		
measResultsSL-r16 SEQUENCE {			
measResultsListSL-r16 CHOICE {			
measResultNR-SL-r16 SEQUENCE {			
measResultListCBR-NR-r16 SEQUENCE (SIZE (1.. maxNrofSL-PoolToMeasureNR-r16)) OF MeasResultCBR-NR-r16 {	1 entry		
MeasResultCBR-NR-r16[1] SEQUENCE {		entry 1	
sl-poolReportIdentity-r16	1		
sl-CBR-ResultsNR-r16	(3..4)		
}			
}			
}			
}			
}			
}			

}			
}			
}			

9.1.5.1.5 Test requirement

Active sidelink UE specific test parameters for UE 0~UE 4 are given in Table 9.1.5.1.5-1. Cell specific test parameters for Cell 1 are given in Table 9.1.5.1.5-2.

Table 9.1.5.1.5-1: SyncRef UE Specific Test Parameters for NR SA FR1 congestion control measurement for concurrent operation

Parameter	Unit	Active Sidelink UE *i* (*i* = 0, 1, 2, 3)	
		T1	T2
NR RF Channel Number		1	
Channel Bandwidth ($BW_{channel}$) Note 7	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
PSCCH RMC (defined in A.3.21.3)		CC.1A HD	
PSSCH RMC (defined in A.3.21.3)		CD.1A HD	
Noc Note1	dBm/30 kHz	-104.55 Note 8	
Ês/Noc	dB	4.35	13.62 Note 8
SL-RSSI1 Note 2,3	dBm/3.6 MHz	-78.05	-69.95
SL-RSSI2 Note 2,4	dBm/3.6 MHz	-83.76	-83.76
Io1 Note 2,5	dBm/18 MHz	-78.05	-69.95
	dBm/36 MHz	-78.05	-69.95
Io2 Note 2,6	dBm/18 MHz	-83.76	-83.76
	dBm/36 MHz	-83.76	-83.76
Propagation Condition	-	AWGN	

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 2: SL-RSSI1, SL-RSSI2, Io1 and Io2 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SL-RSSI1 is the SL-RSSI level measured on the slot# 0 - 3 with “SFN mod 5 = 0”.
Note 4: SL-RSSI2 is the SL-RSSI level measured on the slot# 4-9 with “SFN mod 5 = 0” and the slot# 0-9 with “SFN mod 5 = 1,…, 4”.
Note 5: Io1 is the Io level measured on the slot# 0 - 3 with “SFN mod 5 = 0”.
Note 6: Io2 is the Io level measured on the slot# 4-9 with “SFN mod 5 = 0” and the slot# 0-9 with “SFN mod 5 = 1,…, 4”.
Note 7: The UE is only required to be tested in one of the supported test configurations.
Note 8: Including test tolerance given in Annex F.

Table 9.1.5.1.5-2: Cell specific Test Parameters for NR SA FR1 congestion control measurement for concurrent operation

Parameter		Unit	Cell 1
RF Channel Number			2
Duplex Mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
Channel Bandwidth ($BW_{channel}$)	Config 1,2	MHz	10: $N_{RB,c}$ = 52
	Config 3		40: $N_{RB,c}$ = 106
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1
DRX Cycle			N/A
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD

CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.2
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Noc Note2	Config 1,2,3	dBm/15 kHz	-98
Noc Note2	Config 1,2	dBm/SCS	-98
	Config 3		-95
Ês/Noc		dB	3
SS-RSRP Note3	Config 1,2	dBm/SCS	-95
	Config 3		-92
Io Note 3	Config 1,2	dBm/9.36 MHz	-65.2
	Config 3	dBm/38.1 MHz	-59.2
Propagation Condition			AWGN

Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

During T1, all of active sidelink UEs are configured to transmit PSCCH/PSSCH every 50ms such that the SL-RSSI on the resources occupied by active sidelink UEs is lower than *threshS-RSSI-CBR*. Then the measured CBR is lower than *c1-Threshold*. No CBR measurement reporting shall be triggered.

During T2, all of active sidelink UEs are configured to transmit PSCCH/PSSCH every 50ms such that the SL-RSSI on the resources occupied by active sidelink UEs is higher than *threshS-RSSI-CBR*. Then the measured CBR is higher than *c1-Threshold*. CBR measurement reporting shall be triggered.

The rate of correct events observed during repeated tests shall be at least 98%.

9.1.5.2 NR SA FR1 congestion control measurement for PC5-only operation

9.1.5.2.1 Test purpose

The purpose of this test is to verify the congestion control measurement requirements in TS 38.133 [6] clause 12.6.

9.1.5.2.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting only sidelink communication.

9.1.5.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.5.0.1

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.5.

9.1.5.2.4 Test description

9.1.5.2.4.1 Initial conditions

Configure the test equipment and the DUT according to the parameters in Table 9.1.5.2.4.1-1.

Table 9.1.5.2.4.1-1: Initial conditions for NR SA FR1 congestion control measurement for PC5-only operation

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8.		
Channel bandwidth	PC5: As specified by the test configuration selected from Table 9.1.5.2.4.1-2.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.1FFS	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.1FFS	
Exceptions to connection diagram	N/A		

1. The parameter settings for the NR sidelink communication are pre-configured according to TS 38.508-1 [14] clause 4.10.1.
2. Message content exceptions are given in clause 9.1.5.2.4.3
3. There are 4 NR-SS-UEs (active NR sidelink UE i, i = 0,1,2,3) specified in this test. Active NR sidelink UEs are configured according to the generic parameters in Table 9.1.5.2.4.1-2.

Table 9.1.5.2.4.1-2: NR sidelink test parameters for NR SA FR1 congestion control measurement for PC5-only operation

Parameter		Unit	Value	Comment
NR RF Channel Number			1	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$)[Note 2]		MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
SCS		kHz	30	
V2X sidelink communication configuration			As specified in Annex A.11.2	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool			11111111111111111111 11111111111111111111 11111111111111111111 11111111111111111111 11111111111111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[8])
sl-NumSubchannel-r16 included in SL-ResourcePool			1	ENUMERATED {n1}
sl-SubchannelSize included in SL-ResourcePool			10	ENUMERATED {n10}
sl-StartRB-Subchannel-r16			0	
threshS-RSSI-CBR			19	Corresponding -74dBm as defined in Section 6.3.8 in TS38.331[13]
Number of Active Sidelink UEs every 50ms			4	Active Sidelink UE i, where i = 0, 1, 2, 3
Active Sidelink UEs (i = 0,1,2,3)	V2X sidelink Communication configuration		As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1_i}[Note1]	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[8])

	sl-NumSubchannel-r16 included in SL-ResourcePool		1	
	sl-SubchannelSize included in SL-ResourcePool		10	
Timing offset between V2X UE and Active Sidelink UEs		µs	CP/2	Synchronous
sl-CBR-RangeConfigList-r16			[2 100]	Two ranges are defined by this list: 0 to 0.02 and 0.02 to 1
sl-CR-Limit-r16			10000 and 10	Corresponding to the two CBR ranges: if CBR > 0.02, CR ≤ 0.001, otherwise CR > 0.001
sl-Thres-RSRP-r16			12	Configure threshold <-98.64dBm/30kHz to ensure not blocking transmission
Hysteresis			0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
T1		s	5	
T2		s	5	
Note 1: $\{1_i\}$ is a sequence of ninety nine 0's with one 1 in i+1'th position. Note 2: The UE is only required to be tested in one of the channel bandwidths.				

9.1.5.2.4.2 Test procedure

In this test there is 4 active sidelink UEs (denoted as UE i, i = 0,1,2,3). There are 1 active cells (Cell 1) and no GNSS during the whole test. DUT and all active sidelink UEs select Cell 1 as synchronization reference source. All active sidelink UEs are scheduled to transmit PSCCH/PSSCH with 50ms periodicity.

The test consists of two successive time periods with time duration of T1 and T2 respectively.

1. Ensure the UE is in state 4-A with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The SS switches on all active sidelink UEs, triggers all active sidelink UEs to transmit PSCCH/PSSCH with 50ms periodicity.
3. The SS sends AT command +CCUTLE to close test loop function and trigger UE to transmit.
4. The SS sets parameters according to T1 in Table 9.1.5.2.5-1. T1 starts.
5. During T1, the SS recodes the number of resources occupied by the PSSCH transmission of the UE under test (denoted as $N_{resource,\ low\ CBR}$:) until T1 expires. If $N_{resource,\ low\ CBR} > 10$, then count as success for the event "high CR limit", otherwise count a fail for the event "high CR limit".
6. When T1 expires, the SS shall switch the power setting from T1 to T2 in Table 9.1.5.2.5-1. T2 starts.
7. During T2, the SS recodes the number of resources occupied by the PSSCH transmission of the UE under test (denoted as $N_{resource,\ high\ CBR}$:) until T2 expires. If $N_{resource,\ low\ CBR} \leq 10$, then count as success for the event "low CR limit", otherwise count a fail for the event "low CR limit".
8. When T2 expires, the SS sends AT command +CCUTLE to open test loop function and trigger UE to stop transmitting.
9. Repeat step 3-7 until the confidence level according to Table G.3.3-1 is achieved.

9.1.5.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.5.2.4.3-1: SL-ResourcePool (UE under test)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-ThreshS-RSSI-CBR-r16	19	actual value is -112 + 2*19 = -74 dBm	
sl-UE-SelectedConfigRP-r16 SEQUENCE {			
sl-CBR-PriorityTxConfigList-r16	SL-CBR-PriorityTxConfigList	Table 9.1.5.2.4.3-2	
sl-ResourceReservePeriodList-r16 SEQUENCE (SIZE (1..16)) OF SL-ResourceReservePeriod-r16 {	2 entries		
SL-ResourceReservePeriod-r16[1] CHOICE {		entry 1	
sl-ResourceReservePeriod1-r16	ms0		
}			
SL-ResourceReservePeriod-r16[2] CHOICE {		entry 2	
sl-ResourceReservePeriod2-r16	50		
}			
}			
}			
sl-FilterCoefficient-r16	fc0	L3 filtering is disabled	
sl-TimeResource-r16	ones(1,100)	ones(1,100) is a sequence of 100 "1"s	
}			

Table 9.1.5.2.4.3-2: SL-CBR-PriorityTxConfigList (Table 9.1.5.2.4.3-1)

Derivation Path: TS 38.508-1 [14] Table 4.6.6-5			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-CBR-PriorityTxConfigList -r16 ::= SEQUENCE (SIZE (1..8)) OF SL-PriorityTxConfigIndex-r16 {	8 entries		
SL-PriorityTxConfigIndex-r16[k, k=1..8] SEQUENCE {		entry k	
sl-DefaultTxConfigIndex-r16	Not present		
sl-Tx-ConfigIndexList-r16 SEQUENCE (SIZE (1..maxCBR-Level-r16)) OF SL-TxConfigIndex-r16 {	2 entries		
SL-TxConfigIndex-r16[1]	0	entry 1 First entry in sl-CBR-PSSCH-TxConfigList is used for the first CBR range in sl-CBR-RangeConfigList, i.e. 0<=CBR<0.02	
SL-TxConfigIndex-r16[2]	1	entry 2 Second entry in sl-CBR-PSSCH-TxConfigList is used for the second CBR range in sl-CBR-RangeConfigList, i.e. 0.02<=CBR<1	
}			
}			
}			

Table 9.1.5.2.4.3-3: SL-CBR-CommonTxConfigList (UE under test)

Derivation Path: TS 38.508-1 [14], Table 4.6.6-6

Information Element	Value/remark	Comment	Condition
SL-CBR-CommonTxConfigList-r16 ::= SEQUENCE {			
sl-CBR-RangeConfigList-r16 SEQUENCE (SIZE (1..maxCBR-Config-r16)) OF SL-CBR-LevelsConfig-r16 {	1 entry		
SL-CBR-LevelsConfig-r16[1] SEQUENCE (SIZE (1..maxCBR-Level-r16)) OF SL-CBR-r16 {	2 entries	entry 1	
SL-CBR-r16[1]	2	entry 1 0<=CBR<0.02	
SL-CBR-r16[2]	100	entry 2 0.02<=CBR<1	
}			
}			
sl-CBR-PSSCH-TxConfigList-r16 SEQUENCE (SIZE (1.. maxTxConfig-r16)) OF SL-CBR-PSSCH-TxConfig-r16 {	2 entries		
SL-CBR-PSSCH-TxConfig-r16[1] SEQUENCE {		entry 1	
sl-CR-Limit-r16	10000	0.001 <CR <=1	
sl-TxParameters-r16	Not present		
}			
SL-CBR-PSSCH-TxConfig-r16[2] SEQUENCE {		entry 2	
sl-CR-Limit-r16	10	CR <=0.001	
sl-TxParameters-r16	Not present		
}			
}			
}			

Table 9.1.5.2.4.3-4: SL-ResourcePool (active sidelink UE 0~3)

Derivation Path: TS 38.508-1 [14] Table 7.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SL-ResourcePool-r16 ::= SEQUENCE {			
sl-UE-SelectedConfigRP-r16 SEQUENCE {			
sl-ResourceReservePeriodList-r16 SEQUENCE (SIZE (1..16)) OF SL-ResourceReservePeriod-r16 {	2 entries		
SL-ResourceReservePeriod-r16[1] CHOICE {		entry 1	
sl-ResourceReservePeriod1-r16	ms0		
}			
SL-ResourceReservePeriod-r16[2] CHOICE {		entry 2	
sl-ResourceReservePeriod2-r16	50		
}			
}			
}			
sl-TimeResource-r16	$\{1_i\}$	$\{1_i\}$ is a sequence of ninety-nine 0's with one 1 in (mod(i,100)+1)'th position i = 0,1,2,3	sidelink UE i
}			

Table 9.1.5.2.4.3-5: Physical layer parameters for SCI format 1-A (Sidelink UE 0~3)

Derivation Path: TS 38.508-1 [14] Table 4.3.6.2.1.1-1			
Parameter	**Value**	**Value in binary**	**Condition**
Frequency resource assignment	Not present	-	
Time domain resource assignment	Indicates only one resource is scheduled	"00000"B	
Resource reservation period	Indicates the 2nd entry in sl-ResourceReservePeriodList, i.e. 50 ms	"1"B	

Table 9.1.5.2.4.3-6: +CCUTLE (Test procedure, step 3)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Close and Transmit

Table 9.1.5.2.4.3-7: +CCUTLE (Test procedure, step 8)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Open

9.1.5.2.5 Test requirement

Active sidelink UE specific test parameters for UE 0~UE 4 are given in Table 9.1.5.2.5-1.

Table 9.1.5.2.5-1: SyncRef UE Specific Test Parameters for NR SA FR1 congestion control measurement for PC5-only operation

Parameter	Unit	Active Sidelink UE *i* (*i* = 0, 1, 2, 3)	
		T1	T2
NR RF Channel Number		1	
Channel Bandwidth ($BW_{channel}$) Note 7	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	
PSCCH RMC (defined in A.3.21.3)		CC.1A HD	
PSSCH RMC (defined in A.3.21.3)		CD.1A HD	
Noc Note1	dBm/30 kHz	-104.55 Note 8	
Ês/Noc	dB	4.35	13.62 Note 8
SL-RSSI1 Note 2,3	dBm/3.6 MHz	--78.05	-69.95
SL-RSSI2 Note 2,4	dBm/3.6 MHz	-83.76	-83.76
Io1 Note 2,5	dBm/18 MHz	-78.05	-69.95
	dBm/36 MHz	-78.05	-69.95
Io2 Note 2,6	dBm/18 MHz	-83.76	-83.76
	dBm/36 MHz	-83.76	-83.76
Propagation Condition	-	AWGN	

Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.
Note 2: SL-RSSI1, SL-RSSI2, Io1 and Io2 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SL-RSSI1 is the SL-RSSI level measured on the slot# 0 - 3 with “SFN mod 5 = 0”.
Note 4: SL-RSSI2 is the SL-RSSI level measured on the slot# 4-9 with “SFN mod 5 = 0” and the slot# 0-9 with “SFN mod 5 = 1,…, 4”.
Note 5: Io1 is the Io level measured on the slot# 0 - 3 with “SFN mod 5 = 0”.
Note 6: Io2 is the Io level measured on the slot# 4-9 with “SFN mod 5 = 0” and the slot# 0-9 with “SFN mod 5 = 1,…, 4”.
Note 7: The UE is only required to be tested in one of the supported test configurations.
Note 8: Including test tolerance given in Annex F.

During T1, all of active sidelink UEs are configured to transmit PSCCH/PSSCH every 50ms such that the SL-RSSI on the resources occupied by active sidelink UEs is lower than *threshS-RSSI-CBR*. Then the measured CBR is lower than 2%. The UE needs to ensure its channel occupancy ratio higher than 1% in T1.

During T2, all of active sidelink UEs are configured to transmit PSCCH/PSSCH every 50ms such that the SL-RSSI on the resources occupied by active sidelink UEs is higher than *threshS-RSSI-CBR*. Then the measured CBR is higher than 2%. The UE needs to ensure its channel occupancy ratio lower than 1% in T2.

The rate of correct events observed during repeated tests shall be at least 98%.

9.1.6 Congestion control measurement

9.1.6.0 Minimum conformance requirements

9.1.6.0.1 Minimum conformance requirements for interruption to WAN due to NR sidelink communication

This clause contains the requirements related to the interruptions on the PCell/serving cell due to NR sidelink communication.

A UE capable of NR sidelink communication may indicate its interest (initiation or termination) in NR sidelink communication to the connected gNB using IE *SidelinkUEInformationNR* in TS 38.331 [13].

The UE is allowed an interruption of up to the duration shown in Table 9.1.6.0.1-1 on the PCell/serving cell during the RRC reconfiguration procedure that includes the V2X sidelink communication configuration message *SL-ConfigDedicatedNR* in TS 38.331 [13] (setup and release). This interruption is for both uplink and downlink of the PCell/serving cell.

Table 9.1.6.0.1-1: Interruption length at V2X RRC reconfiguration

μ	NR Slot length (ms)	Interruption length (number of slots)
0	1	2
1	0.5	3
2	0.25	5
3	0.125	9

The normative references for this requirement are TS 38.133 [6] clause 12.7.

9.1.6.1 NR SA FR1 interruption to WAN due to NR sidelink communication

9.1.6.1.1 Test purpose

The purpose of this test is to verify the requirements related to interruptions due to NR sidelink communication as specified in TS 38.133 [6] clause 12.7.1, when UE is out of coverage on the NR sidelink carrier and is associated with a serving cell on a non-sidelink carrier.

9.1.6.1.2 Test applicability

This test applies to all types of NR UEs from release 16 onwards and supporting NR Uu and sidelink communication.

9.1.6.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 9.1.6.0.1

The normative reference for this requirement is TS 38.133 [6] clause A.9.1.6.1.

9.1.6.1.4 Test description

9.1.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 9.1.6.1.4.1-1.

Table 9.1.6.1.4.1-1: Supported test configurations for FR1 NR Cell

Configuration	Description
9.1.6.1-1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
9.1.6.1-2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz

9.1.6.1-3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note:	The UE is only required to pass in one of the supported test configurations in FR1

Configure the test equipment and the DUT according to the parameters in Table 9.1.6.1.4.1-2.

Table 9.1.6.1.4.1-2: Initial conditions for NR SA FR1 interruption to WAN due to NR sidelink communication

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	Uu&PC5: As specified in TS 38.508-1 [14] clause 4.3.1.8.2.1.		
Channel bandwidth	Uu: As specified by the test configuration selected from Table 9.1.6.1.4.1-1 PC5: As specified by the test configuration selected from Table 9.1.6.1.4.1-4		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.9.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.7.3	
Exceptions to connection diagram	N/A		

1. The parameter settings for the NR sidelink communication are pre-configured according to TS 38.508-1 [14] clause 4.10.1.
2. Message content exceptions are defined in clause 9.1.6.1.4.3
3. There is one NR Uu carrier and one NR Cell (Cell 1) specified in this test. Cell 1 is configured according to Annex C.1.1 and C.1.2.
4. Test parameters for Cell 1 are given in Table 9.1.6.1.4.1-3.
5. There are 8 active sidelink UEs (UE i, i=0,1,...,7) in this test. Test parameters for active sidelink UEs are given in Table 9.1.6.1.4.1-3 and Table 9.1.6.1.4.1-4.

Table 9.1.6.1.4.1-3: General test parameters for NR SA FR1 interruption to WAN due to NR sidelink communication

Parameter	Unit	Value	Comment
RF Channel Number	-	1, 2	RF channel 1 is non-sidelink carrier RF channel 2 is sidelink carrier
SCS	kHz	30	
Active cell	-	Cell 1	PCell on RF channel number 1
CP length of Cell 1	-	Normal	
T1	s	5.12	
T2	s	Up to receiving RRC reconfiguration setup complete from the UE, or up to 2 second if UE does not transmit *SidelinkUEInformationNR* during this period.	
T3	s	10	

Table 9.1.6.1.4.1-4: Sidelink test parameters for NR SA FR1 interruption to WAN due to NR sidelink communication

Parameter	Unit	Value	Comment
RF Channel Number	-	2	HD carrier in Band n47 or n38
Channel Bandwidth ($BW_{channel}$) Note 1	MHz	20 ($N_{RB,c}$ = 50) or 40 ($N_{RB,c}$ = 100)	

Sidelink Communication configuration		-	As specified in Annex A.11.2	IE values unless specified otherwise in this test.
Number of Active Sidelink UEs		-	8	Active Sidelink UE i = 0, .., 7
Active Sidelink UEs (UE i = 0, .., 7)	Sidelink Communication configuration	-	As specified in Annex A.11.2	IE values unless specified otherwise in this test.
	PSCCH Reference Measurement Channel	-	CC.1A HD	As specified in Table A.11.2.2-1
	PSSCH Reference Measurement Channel	-	CD.1A HD	As specified in Table A.11.2.2-2
	sl-NumSubchannel-r16 included in SL-ResourcePool	-	1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool	-	i	Indicates the lowest RB index of the subchannel with the lowest index for active Sidelink UE i = 0, .., 7.
	PSBCH-RSRP	dBm/30kHz	-95	
Note 1: The UE is only required to be tested in one of the supported test configurations.				

9.1.6.1.4.2 Test procedure

In this test there is one active cell (Cell 1) and 8 active sidelink UEs transmitting sidelink communication. The UE under test and all active sidelink UEs select the active cell as synchronization source.

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

For this test, the UE is triggered by the test loop function or the upper layers to monitor NR sidelink communication.

1. Ensure the UE is in state 1N-B with generic procedure parameters Test Mode = *On* according to TS 38.508-1 [14] clause 4.4A.2.
2. The SS switches on all active sidelink UEs. Active sidelink UEs are configured to transmit PSCCH/PSSCH according to the parameters specified in Table 9.1.6.1.4.1-4.
3. The SS sends AT command +CCUTLE to close test loop function and trigger UE to receive.
4. The SS sets parameters according to T1 in Table 9.1.6.1.5-1. T1 starts.
5, When T1 expires, the SS sends a paging message including matched *ng-5G-S-TMSI*.
6. The UE sends an *RRCSetupRequest* message.
7. The SS sends an *RRCSetup* message.
8. The UE sends an *RRCSetupComplete* message.
9. The SS shall switch the power setting from T1 to T2 in Table 9.1.6.1.5-1 upon receiving the *RRCSetupComplete* message sent by the UE, T2 starts.
10. If the UE sends a *SidelinkUEInformationNR* message within 2 seconds from the beginning of T2. continues with step 11, otherwise skips to step 13.
11. The SS sends an *RRCReconfiguration* message with *SL-ConfigDedicatedNR* to provide sidelink communication configuration to the UE.
12. The UE sends a *RRCReconfigurationComplete* message.
13. T2 expires. The SS shall switch the power setting from T2 to T3 in Table 9.1.6.1.5-1. T3 starts.
14. During T3, The SS continuously schedules the UE to perform DL reception in every DL slots and monitoring corresponding ACK/NACK feedback in UL slots.

15. If the SS observes on missing ACK/NACKs until T3 expiring, then count a success for the test, otherwise count a fail for the test.

16. When T3 expires, the SS sends AT command +CCUTLE to open test loop function.

9.1.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 9.1.6.1.4.3-1: +CCUTLE (Test procedure, step 3)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Close and Receive

Table 9.1.6.1.4.3-2: +CCUTLE (Test procedure, step 16)

Derivation Path: 38.508-1[14] Table 4.7B-1 with condition Open

9.1.6.1.5 Test requirement

Cell-specific test parameters for Cell 1 are given in Table 9.1.6.1.5-1.

Table 9.1.6.1.5-1: Cell specific test parameters for NR SA FR1 interruption to WAN due to NR sidelink communication

Parameter		Unit	Cell 1		
			T1	T2	T3
RF Channel Number			1		
UE RRC state			IDLE	CONNECTED	
Duplex Mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
Channel Bandwidth ($BW_{channel}$)	Config 1,2	MHz	10: $N_{RB,c}$ = 52		
	Config 3		40: $N_{RB,c}$ = 106		
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1		
DRX Cycle			N/A		
PDSCH Reference measurement channel	Config 1		N/A	None	SR.1.1 FDD
	Config 2		N/A	None	SR.1.1 TDD
	Config 3		N/A	None	SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD		
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
SSB configuration	Config 1,2		SSB.1 FR1		
	Config 3		SSB.2 FR1		
SMTC Configuration			SMTC.2		
OCNG Patterns			OP.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

Noc Note2	Config 1,2,3	dBm/15 kHz	-98
Noc Note2	Config 1,2	dBm/SCS	-98
	Config 3		-95
Ês/Noc		dB	3
SS-RSRP Note3	Config 1,2	dBm/SCS	-95
	Config 3		-92
Io Note 3	Config 1,2	dBm/9.36 MHz	-65.3
	Config 3	dBm/38.1 MHz	-59.2
Antenna Configuration			1x2
Propagation Condition			AWGN
Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

During T1, the UE is in RRC_IDLE and monitoring the sidelink communication transmission from other active Sidelink UEs on the sidelink communication resources.

During T2, the test system establishes a RRC connection with the UE. No PDSCH is scheduled for UE, and the UE is expected to transmit *SidelinkUEInformationNR* indicating *sl-RxInterestedFreqList*. On reception of *SidelinkUEInformationNR*, the test system shall send *RRCReconfiguration* message to the UE and wait for the UE to respond with *RRCReconfigurationComplete* message before transitioning to T3. If the UE does not transmit *SidelinkUEInformationNR* for up to 2 second, the test system shall transition to T3.

During T3, the UE is continuously scheduled with PDSCH on PCell downlink. The test system will count the missed ACK/NACKs during T3 to verify the allowed interruptions during NR sidelink communication. 100% of all expected ACK/NACKs shall be transmitted by the UE.

10 EN-DC Tests with NR PSCell under CCA and Other NR Cells in FR1

10.0 General

10.0.1 Principle of testing for UE capable of EN-DC with only NR bands with shared spectrum access

Test cases in table 10.0.1-1 are defined for UE capable of EN-DC with only NR band(s) with shared spectrum access and are not required for UE supporting also other NR band(s) (i.e. band with no shared spectrum access). The EN-DC configurations are defined in clause of 5.5B of TS 38.101-3 [4].

Table 10.0.1-1: Test cases applicable to UE supporting EN-DC with only NR bands with shared spectrum access

Test category	Section	Test case
Active BWP switching	10.3.5.2.1	EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch in non-DRX in synchronous EN-DC
	10.3.5.2.2	EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC
	10.3.5.3.1	EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch in non-DRX in synchronous EN-DC

10.1 RRC_CONNECTED state mobility

10.1.1 Random Access

10.1.1.0 Minimum conformance requirements

10.1.1.0.1 Minimum conformance requirements for 4-step RA type

The random access procedure is initiated to establish uplink time synchronization for a UE which either has not acquired or has lost its uplink synchronization, or to convey UE's request Other SI, or for beam failure recovery. The random access is specified in clause 8 of TS 38.213 [8] and the control of the RACH transmission is specified in clause 5.1 of TS 38.321 [12]. Two types of procedure are defined for the random access, the 4-step RA type, and the 2-step RA type [7]. The decision on which type of procedure to adopt is as described in clause 5.1.1 of TS 38.321 [12]. The requirements for the 4-step RA type procedure are described in clause 6.2.2A.2, whereas the requirements for the 2-step RA type procedure are described in the clause 6.2.2A.3 of this specification.

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [12].

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [8] and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [2]. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [2].

The UE shall indicate a random access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4 in TS 38.321 [12].

The requirements in this clause apply for UE operating in a carrier frequency with CCA in SA operation mode or any MR-DC operation mode, in a carrier frequency with CCA.

10.1.1.0.1.1 Contention based random access

10.1.1.0.1.1.1 Correct behaviour when transmitting Random Access Preamble

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SSB is configured, as specified in clause 5.1.2 in TS 38.321 [12].

If the UL CCA is successful on the next available PRACH occasion, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall perform the Random Access Resource selection procedure again, as specified in clause 5.1.3 in TS 38.321 [12].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3 in TS 38.321 [12].

10.1.1.0.1.1.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

10.1.1.0.1.1.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], if the UL CCA is successful, and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [12].

10.1.1.0.1.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission, if the UL CCA is successful,

10.1.1.0.1.1.5 Correct behaviour when receiving a message over Temporary C-RNTI

If the UL CCA is successful, The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires and the UL CCA is successful, unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

10.1.1.0.1.1.6 Correct behaviour when contention Resolution timer expires

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2A.2.

10.1.1.0.1.2 Non-Contention based random access

10.1.1.0.1.2.1 Correct behaviour when transmitting Random Access Preamble

If the UL CCA is successful on the next available PRACH occasion and if the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

If the UL CCA is successful, and if the random access procedure is initialized for beam failure recovery and if the contention-free Random Access Resources and the contention-free PRACH occasions for beam failure recovery request associated with SSBs configured, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall perform the Random Access Resource selection procedure again, as specified in clause 5.1.3 in TS 38.321 [12].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3 in TS 38.321 [12].

10.1.1.0.1.2.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE may stop monitoring for Random Access Response(s) and shall monitor the Other SI transmission if the Random Access Response only contains a Random Access Preamble identifier which is corresponding to the transmitted Random Access Preamble and the random access procedure is initialized for SI request from UE, as specified in clause 5.1.4 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s), if the contention-free Random Access Preamble for beam failure recovery request was transmitted and if the PDCCH addressed to UE's C-RNTI is received, as specified in clause 5.1.4 in TS 38.321 [12].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion if the UL CCA is successful, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

10.1.1.0.1.2.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion if the UL CCA is successful, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2A.2.

10.1.1.0.2 Minimum conformance requirements for 2-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [12].

The UE shall have capability to calculate MsgA PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [8] and the MsgA PUSCH power formula of clause 7.1.1 of TS 38.213 [8] and apply this power level at the first MsgA or additional MsgA repetitions. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [2]. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [2].

The UE shall switch to 4-step RA type procedure if the MsgA transmission counter has exceeded *msgA-TransMax*, if configured, as specified in clause 5.1.4a of TS 38.321 [12]. The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4a in TS 38.321 [12].

The requirements in this clause apply for UE operating in a carrier frequency with CCA in SA operation mode or any MR-DC operation mode, in a carrier frequency with CCA.

10.1.1.0.2.1 Contention based random access

10.1.1.0.2.1.1 Correct behaviour when transmitting MsgA

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, the UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2a in TS 38.321 [12].

If the UL CCA is successful on the next available PRACH occasion, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, UE shall have the capability to transmit MsgA PRACH on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured.

The PRACH preamble and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [12].

In association with the MsgA PRACH, if the UL CCA is successful, the UE shall be able to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [8].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and perform the Random Access Resource selection procedure, as specified in clause 5.1.3a in TS 38.321 [12].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3a in TS 38.321 [12]. If the Random Access Procedure is not complete and the UE is configured with *msgA-TransMax* then, as specified in clause 5.1.3a in TS 38.321 [12], the UE shall perform the Random Access Resource selection procedure with 4-step RA type provided that PREAMBLE_TRANSMISSION_COUNTER = *msgA-TransMax* + 1.

10.1.1.0.2.1.2 Correct behaviour when receiving MsgB

The UE shall stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [8] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [12].

If the UL CCA is successful, the UE shall send ACK if Success RAR is received in MsgB and the Contention Resolution is successful, as defined in clause 5.1.4a in TS 38.321 [12].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH if the UL CCA is successful, and monitor contention resolution as described in clause 8.2A in TS 38.213 [8].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power, if the UL CCA is successful on the next available PRACH occasion, when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [12].

10.1.1.0.2.1.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12], and if the UL CCA is successful, transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful on the next available PRACH occasion when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2A.2.

10.1.1.0.2.2 Non-Contention based random access

10.1.1.0.2.2.1 Correct behaviour when transmitting MsgA

If the UL CCA is successful, if the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [12].

In association with the MsgA PRACH, the UE shall be able to transmit MsgA PUSCH, if the UL CCA is successful, on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [8].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall have cancel the transmission of the MsgA payload on the associated PUSCH resource and perform the Random Access Resource selection procedure, as specified in clause 5.1.3a in TS 38.321 [12].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3a in TS 38.321 [12]. If the Random Access Procedure is not complete and the UE is configured with *msgA-TransMax* then, as specified in clause 5.1.3a in TS 38.321 [12], the UE shall perform the Random Access Resource selection procedure with 4-step RA type provided that PREAMBLE_TRANSMISSION_COUNTER = *msgA-TransMax* + 1.

10.1.1.0.2.2.2 Correct behaviour when receiving MsgB

The UE may stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [8] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [12].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH if the UL CCA is successful, as described in clause 8.2A in TS 38.213 [8].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12] for the next available PRACH occasion, and transmit the preamble with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful, if all received MsgBs contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

10.1.1.0.2.2.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12] for the next available PRACH occasion, and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful on the next available PRACH occasion, if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA* and the Random Access Response Reception has not been considered as successful as defined in clause 5.1.4a in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2A.2.

10.1.1.1.1 EN-DC FR1 4-step RA type contention based random access test for NR PSCell with CCA

10.1.1.1.1.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in 38.133 [6] clause 6.2.2A.2 and clause 7.1.2 in an AWGN model.

10.1.1.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a UL shared spectrum NR carrier.

10.1.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.1.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.10.1.1.1.1.

10.1.1.1.1.4 Test description

10.1.1.1.1.4.1 Initial conditions

This test can be run in one of the configurations defined in Table 10.1.1.1.1.4.1-1.

Table 10.1.1.1.1.4.1-1: Supported test configurations for contention based random access test in FR1 for PSCell with CCA

Configuration	Description
10.1.1.1.1-1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.1.1.1.1-2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to be tested in one of the supported test configurations in FR1 depending on UE capability.	

Configure the test equipment and the DUT according to the parameters in Table 10.1.1.1.1.4.1-2

Table 10.1.1.1.1.4.1-2: Initial conditions for contention based random access test in FR1 for PSCell with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.1.1.1.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.1.1.1.1.4.3.

2. There are one E-UTRAN carrier and one NR carrier cells specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on NR carrier. Cell 2 is subject to CCA. Cell 1 is the cell used for connection setup with the power level set according to Table A.6B.1-1. Cell 2 shall be configured according to clauses C.1.1 and C.1.2.

10.1.1.1.1.4.2 Test procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell) subject to CCA. Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. For the NR PSCell, the System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set up E-UTRA PCell according to parameters given in Table A.6B.1-1 and setup NR PSCell according to parameters given in Table 10.1.1.1.1.5-1. The SS shall enable DL and UL CCA model according to Table 10.1.1.1.1.5-1.

3. The test system shall send a RRCReconfiguration message to the UE to add NR PSCell, then the UE shall trigger a random access procedure.

4. Test 1: Correct behaviour when transmitting Random Access Preamble:

   4.1. If the UL CCA is successful , The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured rsrp-ThresholdSSB.

5. Test 2: Correct behaviour when receiving Random Access Response:

   5.1. Repeat steps 1-3.

   5.2. If the UL CCA is successful, The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

   5.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and if the UL CCA is successful , transmit with the calculated PRACH transmission power when the backoff time expires.

   5.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   5.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

   5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 10.1.1.1.1.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 10.1.1.1.1.5.

6. Test 3: Correct behaviour when not receiving Random Access Response:

   6.1. Repeat steps 1-3.

   6.2. If the UL CCA is successful,The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

   6.3. As no Random Access Response was received within the RA Response window, and if the UL CCA is successful, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and if the UL CCA is successful , transmit with the calculated PRACH transmission power when the backoff time expires.

   6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 10.1.1.1.1.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 10.1.1.1.1.5.

7. Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission:

   7.1. Repeat steps 1-3.

   7.2. If the UL CCA is successful , The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

   7.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, UE shall transmit the msg3 including C-RNTI MAC control element.

   7.4. The System Simulator shall send PDCCH addressed to the Temporary C-RNTI after receiving the msg3.

   7.5. If the UL CCA is successful, The UE shall re-transmit the msg3 including C-RNTI MAC control element.

   7.6. The System Simulator shall check if UE re-transmit the msg3.

8. Test 5: Correct behaviour when receiving a successful UE Contention Resolution:

   8.1. Repeat steps 1-3.

   8.2. If the UL CCA is successful, The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

   8.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, and If the UL CCA is successful, the UE shall transmit the msg3 including C-RNTI MAC control element.

   8.4. The System Simulator shall send a PDCCH addressed to the C-RNTI.

   8.5. The UE shall send PUSCH according to the received PDCCH addressed to the C-RNTI.

9. Test 7: Correct behaviour when contention Resolution timer expires:

   9.1. Repeat steps 1-3.

   9.2. If the UL CCA is successful,The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

   9.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3 including C-RNTI MAC control element.

   9.4. The System Simulator shall not send a PDCCH addressing the C-RNTI.

   9.5. As there was no PDCCH addressing the C-RNTI, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and if the UL CCA is successful, transmit with the calculated PRACH transmission power when the Contention Resolution Timer expires and then after the backoff timer expires.

   9.6. Measure the power and timing of the first preamble after the Contention Resolution Timer and backoff timer expire and it shall not exceed the values specified in clause 10.1.1.1.1.5.

10.1.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.1.1.1.1.4.3-0: Common Exception messages for contention based random access test in FR1 for PSCell with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 10.1.1.1.1.4.3-1: RACH-ConfigCommon for contention based random access test in FR1 for PSCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n48		FR1
}			
groupBconfigured SEQUENCE {			
numberOfRA-PreamblesGroupA	48		
}			
ra-ContentionResolutionTimer	sf48		
rsrp-ThresholdSSB	RSRP_51		
prach-RootSequenceIndex CHOICE {			
l139	0		
}			
msg1-SubcarrierSpacing	kHz 30		30 kHz
}			

Table 10.1.1.1.1.4.3-2: RACH-ConfigGeneric for contention based random access test in FR1 for PSCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	102		FR1
msg1-FDM	one		FR1
zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-114		
preambleTransMax	N20		
powerRampingStep	dB2		
ra-ResponseWindow	Sl20		
}			

Table 10.1.1.1.1.4.3-3: *ServingCellConfigCommon* for contention based random access test in FR1 for PSCell with CCA

Derivation Path: TS 38.508-1 [14], table 7.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
ss-PBCH-BlockPower	-5		
}			

10.1.1.1.1.5 Test requirement

Table 10.1.1.1.1.5-1 defines the primary level settings for contention based random access test in FR1 for PSCell in EN-DC. Tables 10.1.1.1.1.5-2, 10.1.1.1.1.5-3 and 10.1.1.1.1.5-4 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances.

Table 10.1.1.1.1.5-1: General test parameters for contention based random access test in FR1 for PSCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1,2		SSB.1 CCA	As defined in A.3A.1
	Note 5, 6	Config 1,2		SSB.2 CCA	As defined in A.3A.1
DBT Window Configuration		Config 1,2		DBT.1	As specified in A.12.1
DL CCA model		Config 1,2		As specified in clause D.7.2.1	
UL CCA model		Config 1,2		As specified in clause D.7.2.2	
Duplex Mode for Cell 2		Config 1,2		TDD	
TDD Configuration		Config 1,2		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.6B.1.
PDSCH parameters Note 3		Config 1,2		SR.1.1 CCA	As defined in A.1A.1.1
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1,2	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1 under CCA	As defined in A.7.1A.1.
DL CCA probability P_{CCA_DL}	Note 4, 6			0.9375	
	Note 5, 6			0.75/0.75	
L_{CCA_DL} Note 7				4	
W_{CCA_DL} Note 8				Inf	
UL CCA probability P_{CCA_UL}	Note 4, 6			0.87	
	Note 5, 6			0.75	
L_{CCA_UL} Note 7				5	
W_{CCA_UL} Note 8				Inf	

Semi-static channel access config period Note 4, 6	ms	2	
Propagation Condition	-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.
Note 8: A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

Test 1: Correct behaviour when transmitting Random Access Preamble:

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.

Test 2: Correct behaviour when receiving Random Access Response:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 10.1.1.1.1.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 10.1.1.1.1.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 10.1.1.1.1.5-4.

Test 3: Correct behaviour when not receiving Random Access Response:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 10.1.1.1.1.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 10.1.1.1.1.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 10.1.1.1.1.5-4.

Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission:

- The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

Test 5: Correct behaviour when receiving a successful UE Contention Resolution:

- The UE shall send PUSCH according to the PDCCH addressed to the C-RNTI.

Test 7: Correct behaviour when contention resolution timer expires:

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if the contention resolution timer expires.
- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 10.1.1.1.1.5-2.
- The transmit timing of the PRACH transmission shall be within the accuracy specified in Table 10.1.1.1.1.5-4.

Table 10.1.1.1.1.5-2: Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 10.1.1.1.1.5-3: Relative power tolerance Test requirements

Power step ΔP (Up or down) (dB)	PRACH (dB)
2 ≤ ΔP < 3	±3.2

Table 10.1.1.1.1.5-4: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	30	30	$624*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [7]			

10.1.1.1.2 EN-DC FR1 4-step RA type non-contention based random access for NR PSCell with CCA

10.1.1.1.2.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in 38.133 [6] clause 6.2.2A.2 and clause 7.1.2 in an AWGN model.

10.1.1.1.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a UL shared spectrum NR carrier. Subtest 2 requires support of CSI-RS-based random access.

10.1.1.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.1.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.10.1.1.1.2.

10.1.1.1.2.4 Test description

10.1.1.1.2.4.1 Initial conditions

This test can be run in one of the configurations defined in Table 10.1.1.1.2.4.1-1.

Table 10.1.1.1.2.4.1-1: Supported test configurations for non-contention based random access test in FR1 for PSCell with CCA

Configuration	Description
10.1.1.1.2-1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.1.1.1.2-2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to be tested in one of the supported test configurations in FR1 depending on UE capability.	

Configure the test equipment and the DUT according to the parameters in Table 10.1.1.1.2.4.1-2

Table 10.1.1.1.2.4.1-2: Initial conditions for non-contention based random access test in FR1 for PSCell with CCA

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 10.1.1.1.2.4.1-1	

Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.1.1.1.2.4.3.

2. There are one E-UTRAN carrier and one NR carrier cells specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on NR carrier. Cell 2 is subject to CCA. Cell 1 is the cell used for connection setup with the power level set according to Table A.6B.1-1. Cell 2 shall be configured according to clauses C.1.1 and C.1.2.

10.1.1.1.2.4.2 Test procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell) subject to CCA. Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. For the NR PSCell, the System Simulator shall explicitly assign a random access preamble via dedicated signalling in the downlink.There are two subtests, to test both SSB-based non-contention based random access (subtest 1) and CSI-RS-based non-contention based random access (subtest 2).The CCA model (both DL and UL) is disabled (i.e. PCCA_DL_i= PCCA_UL=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC , DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Set the parameters according to Table 10.1.1.1.2.5-1.

3. SS sends a RRCReconfiguration to trigger a contention-free random access procedure according to the Tables for Non-Contention Random Access in clause 10.1.1.1.2.4.3. The SS shall enable DL and UL CCA model according to Table 10.1.1.1.2.5-1.

4. Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble:

   4.1. If the UL CCA is successful , The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble has the Preamble Index associated with the SSB with index 0, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

5. Test 2: Correct behaviour when transmitting CSI-RS-based Random Access Preamble:

   5.1. Set the parameters according to Table 10.1.1.1.2.5-1 Subtest 2.

   5.2. Repeat steps 1-3.

   5.3. If the UL CCA is successful, The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble has the Preamble Index associated with the CSI-RS configured, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

6. Test 3: Correct behaviour when receiving Random Access Response:

   6.1. Repeat steps 1-3.

   6.2. If the UL CCA is successful ,The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

   6.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection

procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power.

6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 10.1.1.1.2.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 10.1.1.1.2.5.

7. Test 4: Correct behaviour when not receiving Random Access Response:

7.1. Repeat steps 1-3.

7.2. If the UL CCA is successful, The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

7.3. As no Random Access Response was received within the RA Response window configured in *RACH-ConfigCommon*, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and if the UL CCA is successful , transmit with the calculated PRACH transmission power.

7.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

7.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

7.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 10.1.1.1.2.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 10.1.1.1.2.5.

10.1.1.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6.1 with the following exceptions.

Table 10.1.1.1.2.4.3-0: Common Exception messages for non-contention based random access test in FR1 for PSCell with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 10.1.1.1.2.4.3-1: RACH-ConfigCommon for non-contention based random access test in FR1 for PSCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
rsrp-ThresholdSSB	RSRP_51		Subtest 1
prach-RootSequenceIndex CHOICE {			
l139	0		
}			
msg1-SubcarrierSpacing	kHz 30		30kHz

}			

Table 10.1.1.1.2.4.3-2: RACH-ConfigDedicated for non-contention based random access test in FR1 for PSCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	1 entry		
ssb[1]	0		
ra-PreambleIndex[1]	50		Subtest 1
}			
ra-ssb-OccasionMaskIndex	1		Subtest 1
}			
csirs SEQUENCE {			
csirs-ResourceList SEQUENCE (SIZE(1..maxRA-CSIRS -Resources)) OF {			
ra-OccasionList	1		Subtest 2
ra-PreambleIndex[1]	50		Subtest 2
}			
rsrp-ThresholdCSI-RS	RSRP_51		Subtest 2
}			
}			
}			
}			

Table 10.1.1.1.2.4.3-3: RACH-ConfigGeneric for non-contention based random access test in FR1 for PSCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	102		
msg1-FDM	one		
zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-114		
preambleTransMax	N20		
powerRampingStep	dB2		
ra-ResponseWindow	Sl20		
}			

Table 10.1.1.1.2.4.3-4: *ServingCellConfigCommon* for non-contention based random access test in FR1 for PSCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-168			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
ss-PBCH-BlockPower	-5		
}			

Table 10.1.1.1.2.4.3-5: CellGroupConfig for non-contention based random access test in FR1 for PSCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-19 with Condition CFRA and PSCell_Change

Information Element	Value/remark	Comment	Condition
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex		
reconfigurationWithSync SEQUENCE {			
newUE-Identity	1		
}			
spCellConfigDedicated SEQUENCE {			
firstActiveDownlinkBWP-Id	BWP-Id		
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
srs-Config	SRS-Config		
}			
firstActiveUplinkBWP-Id	BWP-Id		
}			
}			
}			
}			

10.1.1.1.2.5 Test requirement

Table 10.1.1.1.2.5-1 defines the primary level settings for non-contention based random access test in FR1 for PSCell in EN-DC. Tables 10.1.1.1.2.5-2, 10.1.1.1.2.5-3 and 10.1.1.1.2.5-4 define the Absolute power limits, Relative power limits and uplink timing error limits respectively, and all include test tolerances

Table 10.1.1.1.2.5-1: General test parameters for non-contention based random access test in FR1 for PSCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1,2		SSB.1 CCA	As defined in A.3A.1
	Note 5, 6	Config 1,2		SSB.2 CCA	As defined in A.3A.1
DBT Window Configuration		Config 1,2		DBT.1	As specified in A.12.1
DL CCA model		Config 1,2		As specified in clause D.7.2.1	
UL CCA model		Config 1,2		As specified in clause D.7.2.2	
Duplex Mode for Cell 2		Config 1,2		TDD	
TDD Configuration		Config 1,2		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.6B.1.
PDSCH parameters Note 3		Config 1,2		SR.1.1 CCA	As defined in A.1A.1.1
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be

					below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io Note 2		Config 1,2	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 2 under CCA	As defined in A.7.1A.2.
DL CCA probability P_{CCA_DL}		Note 4, 6		0.9375	
		Note 5, 6		0.75/0.75	
L_{CCA_DL} Note 7				4	
W_{CCA_DL} Note 8				Inf	
UL CCA probability P_{CCA_UL}		Note 4, 6		0.87	
		Note 5, 6		0.75	
L_{CCA_UL} Note 7				5	
W_{CCA_UL} Note 8				Inf	
Semi-static channel access config period Note 4, 6			ms	2	
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.

Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.

Note 8: A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble:

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.
- The Random Access Preamble shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0.
- The selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

Test 2: Correct behaviour when transmitting CSI-RS-based Random Access Preamble:

- The Random Access Preamble shall have the Preamble Index associated with the CSI-RS configured.
- The Random Access Preamble shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured.

- the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

Test 3: Correct behaviour when receiving Random Access Response:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 10.1.1.1.2.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 10.1.1.1.2.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 10.1.1.1.2.5-4.

Test 4: Correct behaviour when not receiving Random Access Response:

- The power of the first preamble shall be -22 dBm within the accuracy specified in Table 10.1.1.1.2.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 10.1.1.1.2.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 10.1.1.1.2.5-4.

Table 10.1.1.1.2.5-2: Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 10.1.1.1.2.5-3: Relative power tolerance Test requirements

Power step ΔP (Up or down) (dB)	PRACH (dB)
2 ≤ ΔP < 3	± 3.2

Table 10.1.1.1.2.5-4: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	30	30	$624*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [7].			

10.1.1.1.3 EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

10.1.1.1.3.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in clause 10.1.1.0.2 and 38.133 [6] clause 7.1.2 in an AWGN model.

10.1.1.1.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a UL shared spectrum NR carrier, and supporting twoStepRACH-r16.

10.1.1.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.1.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.10.1.1.1.3.

10.1.1.1.3.4 Test description

For all tests described in section 10.1.1.1.3, the following three requirements apply:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.

- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [12], and transmit with the calculated MsgA transmission power in case of UL CCA failure.

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

10.1.1.1.3.4.1 Initial conditions

This test can be run in one of the configurations defined in Table 10.1.1.1.3.4.1-1.

Table 10.1.1.1.3.4.1-1: Supported test configurations for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

Configuration	Description
10.1.1.1.3-1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.1.1.1.3-2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to be tested in one of the supported test configurations in FR1 depending on UE capability.	

Configure the test equipment and the DUT according to the parameters in Table 10.1.1.1.3.4.1-2

Table 10.1.1.1.3.4.1-2: Initial conditions for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.1.1.1.3.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.1.1.1.3.4.3.

2. There are one E-UTRAN carrier and one NR carrier cells specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on NR carrier. Cell 2 is subject to CCA. Cell 1 is the cell used for connection setup with the power level set according to Table A.6B.1-1. Cell 2 shall be configured according to clauses C.1.1 and C.1.2.

10.1.1.1.3.4.2 Test procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell) subject to CCA. Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. For the NR PSCell, the System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set up E-UTRA PCell according to parameters given in Table A.6B.1-1 and setup NR PSCell according to parameters given in Table 10.1.1.1.3.5-1. The SS shall enable DL and UL CCA model according to Table 10.1.1.1.3.5-1

3. The test system shall send a RRCReconfiguration message to the UE to add NR PSCell, then the UE shall trigger a random access procedure.

4. Test 1: Correct behaviour when transmitting MsgA:

   4.1. If the UL CCA is successful , The UE shall send a MsgA to the System Simulator. The System Simulator shall check that the MsgA preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SSB_RP above the configured rsrp-ThresholdSSB.

   4.2 Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 10.1.1.1.3.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 10.1.1.1.3.5.

5. Test 2: Correct behaviour when receiving MsgB:

   5.1. Repeat steps 1-3.

   5.2. If the UL CCA is successful, The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB containing identifiers that do not match the transmitted Random Access Preamble.

   5.3. As the received MsgB contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and If the UL CCA is successful , transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

   5.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   5.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

   5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 10.1.1.1.3.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 10.1.1.1.3.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 10.1.1.1.3.5.

6. Test 3: Correct behaviour when not receiving MsgB:

   6.1. Repeat steps 1-3.

   6.2. If the UL CCA is successful, the UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

   6.3. As no MsgB was received within the RA Response window, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

   6.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   6.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

   6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 10.1.1.1.3.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 10.1.1.1.3.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 10.1.1.1.3.5.

10.1.1.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.1.1.1.3.4.3-1: Common Exception messages for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-81A

Table 10.1.1.1.3.4.3-2: *RACH-ConfigCommonTwoStepRA* for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

Derivation Path: TS 38.508-1 [14],Table 4.6.3-128A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommonTwoStepRA-r16 ::= SEQUENCE {			
rach-ConfigGenericTwoStepRA-r16	RACH-ConfigGenericTwoStepRA		
msgA-TotalNumberOfRA-Preambles-r16	48		
msgA-SSB-PerRACH-OccasionAndCB-PreamblesPerSSB-r16 CHOICE {			
oneFourth	n48		
}			
msgA-PRACH-RootSequenceIndex-r16 CHOICE {}	0		
msgA-TransMax-r16	n20		
msgA-SubcarrierSpacing-r16	Same as UL carrier SCS		
ra-ContentionResolutionTimer-r16	sf48		
}			

Table 10.1.1.1.3.4.3-3: *RACH-ConfigGenericTwoStepRA* for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

Derivation Path: TS 38.508-1 [14],Table 4.6.3-130A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGenericTwoStepRA-r16 ::= SEQUENCE {			
msgA-PRACH-ConfigurationIndex-r16	102		
msgA-RO-FDM-r16	One		
msgA-ZeroCorrelationZoneConfig-r16	11		
msgA-PreamblePowerRampingStep-r16	dB2		
msgA-PreambleReceivedTargetPower-r16	-114		
msgB-ResponseWindow-r16	sl20		
preambleTransMax-r16	n20		
}			

Table 10.1.1.1.3.4.3-4: *ServingCellConfigCommon* for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-168			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	-5		
}			

10.1.1.1.3.5 Test requirement

Table 10.1.1.1.3.5-1 defines the primary level settings for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA.

Table 10.1.1.1.3.5-1: General test parameters for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

Parameter			Unit	Value	Comments
SSB Configuration	Note 4, 6	Config 1,2		SSB.1 CCA	As defined in A.3A.1
	Note 5, 6	Config 1,2		SSB.2 CCA	As defined in A.3A.1
DBT Window Configuration		Config 1,2		DBT.1	As specified in A.12.1
DL CCA model		Config 1,2		As specified in clause D.7.2.1	
UL CCA model		Config 1,2		As specified in clause D.7.2.2	
Duplex Mode for Cell 2		Config 1,2		TDD	
TDD Configuration		Config 3,4		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.2.1
PDSCH parameters Note 3		Config 1,2		SR.1.1 CCA	As defined in A.1A.1.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP Note 2		dBm/SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 2		dBm/SCS	-115	
Io		Config 1,2	dBm/38.16MHz	-62.18	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 1 under CCA	As defined in A.7A.1A.1.
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
DL CCA probability	Note 4, 6			0.9375	

P_{CCA_DL}	Note 5, 6		0.75/0.75	
L_{CCA_DL} Note 7			4	
W_{CCA_DL} Note 8			Inf	
UL CCA probability	Note 4, 6		0.87	
P_{CCA_UL}	Note 5, 6		0.75	
L_{CCA_UL} Note 7			5	
W_{CCA_UL} Note 8			Inf	
Semi-static channel access config period Note 4, 6		ms	2	
Propagation Condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.

Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.

Note 8: A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

Test 1: Correct behaviour when transmitting MsgA:

- The MsgA shall be one of the Random Access Preambles associated with SSB index 0.
- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 10.1.1.1.3.5-2.
- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2)) within the accuracy specified in Table 10.1.1.1.3.5-2A.

Test 2: Correct behaviour when receiving MsgB:

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 10.1.1.1.3.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 10.1.1.1.3.5-3.
- The transmit timing of all MsgA PRACH transmissions shall be within the accuracy specified in Table 10.1.1.1.3.5-4.
- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2)) within the accuracy specified in Table 10.1.1.1.3.5-2A.

Test 3: Correct behaviour when not receiving MsgB:

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 10.1.1.1.3.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 10.1.1.1.3.5-3.
- The transmit timing of all MsgA PRACH transmissions shall be within the accuracy specified in Table 10.1.1.1.3.5-4.
- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2)) within the accuracy specified in Table 10.1.1.1.3.5-2A.

Table 10.1.1.1.3.5-2: MsgA PRACH Absolute power tolerance Test requirements for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

Conditions	Tolerance
Normal	± 19.1 dB

Table 10.1.1.1.3.5-2A: MsgA PUSCH Absolute power tolerance Test requirements for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

Conditions	Tolerance
Normal	± 19.1 dB

Table 10.1.1.1.3.5-3: Relative power tolerance Test requirements for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

Power step ΔP (Up or down) (dB)	MsgA PRACH (dB)
2 ≤ ΔP < 3	± 3.2 dB

Table 10.1.1.1.3.5-4: T_e Timing error Test requirements for EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	30	30	$624*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [7]			

10.1.1.1.4 EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

10.1.1.1.4.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in clause 10.1.1.0.2 and 38.133 [6] clause 7.1.2 in an AWGN model.

10.1.1.1.4.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a UL shared spectrum NR carrier, and supporting twoStepRACH-r16.

10.1.1.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.1.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.10.1.1.1.4.

10.1.1.1.4.4 Test description

For all tests described in section 10.1.1.4, the following three requirements apply:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.

- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [12], and transmit with the calculated MsgA transmission power in case of UL CCA failure.

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

10.1.1.1.4.4.1 Initial conditions

This test can be run in one of the configurations defined in Table 10.1.1.1.4.4.1-1.

Table 10.1.1.1.4.4.1-1: Supported test configurations for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Configuration	Description
10.1.1.1.4-1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.1.1.1.4-2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to be tested in one of the supported test configurations in FR1 depending on UE capability.	

Configure the test equipment and the DUT according to the parameters in Table 10.1.1.1.4.4.1-2

Table 10.1.1.1.4.4.1-2: Initial conditions for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.1.1.1.4.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.1.1.1.4.4.3.

2. There are one E-UTRAN carrier and one NR carrier cells specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on NR carrier. Cell 2 is subject to CCA. Cell 1 is the cell used for connection setup with the power level set according to Table A.6B.1-1. Cell 2 shall be configured according to clauses C.1.1 and C.1.2.

10.1.1.1.4.4.2 Test procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell) subject to CCA. Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. For the NR PSCell, the System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink. The CCA model (both DL and UL) is disabled (i.e. PCCA_DL_i= PCCA_UL=1) at the start of the test.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 10.1.1.1.4.5-1.

3. SS sends a RRCReconfiguration to trigger a contention-free random access procedure according to the Tables for Non-Contention Random Access in clause 10.1.1.1.4.4.3. The SS shall enable DL and UL CCA model according to Table 10.1.1.1.4.5-1.

4. Test 1: Correct behaviour when transmitting MsgA:

   4.1. If the UL CCA is successful, The UE shall send a MsgA to the System Simulator. The System Simulator shall check that the MsgA preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *msgA-SSB-SharedRO-MaskIndex*.

   4.2 Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 10.1.1.1.4.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 10.1.1.1.4.5.

5. Test 2: Correct behaviour when receiving MsgB:

   5.1. Repeat steps 1-3.

   5.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB containing identifiers that do not match the transmitted Random Access Preamble.

   5.3. As the received MsgB contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and If the UL CCA is successful , transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

   5.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   5.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

   5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 10.1.1.1.4.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 10.1.1.1.4.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 10.1.1.1.4.5.

6. Test 3: Correct behaviour when not receiving MsgB:

   6.1. Repeat steps 1-3.

   6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

   6.3. As no MsgB was received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA*, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

   6.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   6.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

   6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in clause 10.1.1.1.4.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in clause 10.1.1.1.4.5. Measure the power of the first MsgA PUSCH transmission and it shall not exceed the values specified in clause 10.1.1.1.4.5.

10.1.1.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.1.1.1.4.4.3-1: Common Exception messages for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-81A

Table 10.1.1.1.4.4.3-2: *RACH-ConfigCommonTwoStepRA* for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Derivation Path: TS 38.508-1 [14],Table 4.6.3-128A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommonTwoStepRA-r16 ::= SEQUENCE {			
rach-ConfigGenericTwoStepRA-r16	RACH-ConfigGenericTwoStepRA		
msgA-TotalNumberOfRA-Preambles-r16	48		
msgA-PRACH-RootSequenceIndex-r16 CHOICE {}	0		
msgA-TransMax-r16	n20		
msgA-SubcarrierSpacing-r16	Same as UL carrier SCS		
ra-ContentionResolutionTimer-r16	sf48		
}			

Table 10.1.1.1.4.4.3-3: *CellGroupConfig* for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex		
reconfigurationWithSync SEQUENCE {			
newUE-Identity	1		
t304	ms1000		
rach-ConfigDedicted			
uplink	RACH-ConfigDedicated for Non-Contention Based Random Access	Table 10.1.1.1.4.4.3-4	
}			
spCellConfigDedicated SEQUENCE {			
firstActiveDownlinkBWP-Id	BWP-Id		
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
srs-Config	SRS-Config		
}			
firstActiveUplinkBWP-Id	BWP-Id		
}			
}			
}			
}			

Table 10.1.1.1.4.4.3-4: *RACH-ConfigDedicated* for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Derivation Path: TS 38.508-1 [14],Table 4.6.3-129

Information Element	Value/remark	Comment	Condition
RACH-ConfigDedicated ::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF CFRA-SSB-Resource {	1 entry		
CFRA-SSB-Resource[1] SEQUENCE {		entry 1	
ssb	SSB-Index		
ra-PreambleIndex	40		
}			
}			
ra-ssb-OccasionMaskIndex	1		
}			
}			
}			
cfra-TwoStep-r16 SEQUENCE {			2-step RA
occasionsTwoStepRA-r16 SEQUENCE {			
rach-ConfigGenericTwoStepRA-r16	RACH-ConfigGenericTwoStepRA		
ssb-PerRACH-OccasionTwoStepRA-r16	oneFourth		
}			
msgA-CFRA-PUSCH-r16 SEQUENCE {			
msgA-MCS-r16	1		
nrofSlotsMsgA-PUSCH-r16	1		
nrofMsgA-PO-PerSlot-r16	one		
msgA-PUSCH-TimeDomainOffset-r16	1		
nrofPRBs-PerMsgA-PO-r16	2		
nrofMsgA-PO-FDM-r16	one		
msgA-DMRS-Config-r16 SEQUENCE {			
msgA-DMRS-AdditionalPosition-r16	Pos1		
msgA-PUSCH-NrofPorts-r16	1		
}			
msgA-Alpha-r16	alpha1		
}			
resourcesTwoStep-r16 SEQUENCE {			
}			
}			

Table 10.1.1.1.4.4.3-5: *RACH-ConfigGenericTwoStepRA* for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Derivation Path: TS 38.508-1 [14],Table 4.6.3-130A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGenericTwoStepRA-r16 ::= SEQUENCE {			
msgA-PRACH-ConfigurationIndex-r16	102		
msgA-RO-FDM-r16	One		
msgA-ZeroCorrelationZoneConfig-r16	11		
msgA-PreamblePowerRampingStep-r16	dB2		
msgA-PreambleReceivedTargetPower-r16	-114		
msgB-ResponseWindow-r16	sl20		
preambleTransMax-r16	n20		
}			

Table 10.1.1.1.4.4.3-6: *ServingCellConfigCommon* for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-168			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	-5		
}			

10.1.1.4.4.5 Test requirement

Table 10.1.1.1.4.4.5-1 defines the primary level settings for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA.

Table 10.1.1.1.4.5-1: General test parameters for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Parameter			**Unit**	**Value**	**Comments**
SSB Configuration	Note 4, 6	Config 1,2		SSB.1 CCA	As defined in A.3A.1
	Note 5, 6	Config 1,2		SSB.2 CCA	As defined in A.3A.1
DBT Window Configuration		Config 1,2		DBT.1	As specified in A.12.1
DL CCA model		Config 1,2		As specified in clause D.7.2.1	
UL CCA model		Config 1,2		As specified in clause D.7.2.2	
Duplex Mode for Cell 2		Config 1,2		TDD	
TDD Configuration		Config 1,2		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.2.1
PDSCH parameters Note 3		Config 1,2		SR.1.1 CCA	As defined in A.1A.1.1
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	

SS-RSRP		dBm/SCS	-115	
Io Note 2	Config 1,2	dBm/38.16MHz	-62.18	For symbols without SSB index 1
ss-PBCH-BlockPower		dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,f,c}$)		dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration			FR1 MsgA configuration 2 under CCA	As defined inA.7A.1A.2.
msgA-RSRP-ThresholdSSB		dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
DL CCA probability	Note 4, 6		0.9375	
P_{CCA_DL}	Note 5, 6		0.75/0.75	
L_{CCA_DL} Note 7			4	
W_{CCA_DL} Note 8			Inf	
UL CCA probability	Note 4, 6		0.87	
P_{CCA_UL}	Note 5, 6		0.75	
L_{CCA_UL} Note 7			5	
W_{CCA_UL} Note 8			Inf	
Semi-static channel access config period Note 4, 6		ms	2	
Propagation Condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.

Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.

Note 8: A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

Test 1: Correct behaviour when transmitting MsgA:

- The MsgA shall be one of the Random Access Preambles associated with SSB index 0.
- The MsgA shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0.
- The selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *msgA-SSB-SharedRO-MaskIndex*.
- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 10.1.1.1.4.5-2.
- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2)) within the accuracy specified in Table 10.1.1.1.4.5-2A.

Test 2: Correct behaviour when receiving MsgB:

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 10.1.1.1.4.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 10.1.1.1.4.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 10.1.1.1.4.5-4.

- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2)) within the accuracy specified in Table 10.1.1.1.4.5-2A.

Test 3: Correct behaviour when not receiving MsgB:

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 10.1.1.1.4.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 10.1.1.1.4.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 10.1.1.1.4.5-4.
- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2)) within the accuracy specified in Table 10.1.1.1.4.5-2A.

Table 10.1.1.1.4.5-2: MsgA PRACH Absolute power tolerance Test requirements for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Conditions	Tolerance
Normal	± 19.1 dB

Table 10.1.1.1.4.5-2A: MsgA PUSCH Absolute power tolerance Test requirements for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Conditions	Tolerance
Normal	± 19.1 dB

Table 10.1.1.1.4.5-3: Relative power tolerance Test requirements for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Power step ΔP (Up or down) (dB)	MsgA PRACH (dB)
2 ≤ ΔP < 3	± 3.2 dB

Table 10.1.1.1.4.5-4: T_e Timing error Test requirements for EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	30	30	$624*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [7]			

10.1.2 EN-DCFR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA

10.1.2.1 Test purpose

To verify that the requirement for E-UTRA handover with NR PSCell change, where NR PSCell is on carrier with CCA. This test will verify the requirements for EN-DC HO with PSCell change on CCA specified in clause 5.9 in 36.133 [23] for the case when the target PSCell is on carrier with CCA.

10.1.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC, RRM measurements and UL transmission with a shared spectrum NR carrier.

10.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.1.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.1.2.

10.1.2.4 Test description

Table 10.1.2.4.1-1 gives general test configurations for Handover with PSCell from EN-DC to EN-DC, Table 10.1.2.4.1-3 provides general test parameters for Handover from E-UTRA to E-UTRA cell in EN-DC to EN-DC, Table 10.1.2.5-1 provides E-UTRAN cell specific test parameters for Handover with PSCell from EN-DC to EN-DC, Table 10.1.2.4.1-4 provides general test parameters for PSCell change from FR1 carrier under CCA to FR1 carrier under CCA, Table 10.1.2.5-2 provides cell specific test parameters for PSCell change from FR1 carrier under CCA to FR1 carrier under CCA.

In the test there are four cells: Cell1 and Cell2 are PCell and target PCell on E-UTRA carrier, Cell3 and Cell4 are PSCell and target PSCell on NR CCA carrier. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. Before the test starts the UE is connected to Cell1 (E-UTRA PCell) and Cell3 (NR PSCell) with EN-DC mode.

At the start of time duration T1, the UE do not have any information of cell 2 and cell 4. At the end of T1, UE is configured with neighbour cell measurements on the Cell 3 and Cell 4 for Event A3 conditional measurement report.

During T2, UE acquires the timing information of Cell3 and Cell 4 and performs L3-RSRP measurements on the configured neighbour cells. UE sends measurement report to the Cell1 to indicate the event triggering condition A3 is satisfied for the configured for neighbour cells. By end of T2, E-UTRA PCell (Cell1) shall send a RRC message implying handover with PSCell change.

The start of T3 is defined as the end of the last TTI containing the RRC message implying handover with PSCell. UE shall complete PRACH transmission to PCell and PSCell by end of T3.

10.1.2.4.1 Initial conditions

This test can be run in one of the configurations defined in Table 10.1.2.4.1-1.

Table 10.1.2.4.1-1: Supported test configurations for EN-DC FR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA

Configuration	Description
10.1.2-1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.1.2-2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to be tested in one of the supported test configurations in FR1 depending on UE capability.	

Configure the test equipment and the DUT according to the parameters in Table 10.1.2.4.1-2

Table 10.1.2.4.1-2: Initial conditions for EN-DC FR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.1.2.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.1.2.4.3.

2. There are four cells in the test. Cell1 and Cell2 are PCell and target PCell on E-UTRA carrier, Cell3 and Cell4 are PSCell and target PSCell on NR CCA carrier. The UE is initially in an EN-DC connection with Cell 1 and Cell 3. In addition, Cell 1 is the cell used for connection setup with the power level set according to Table A.6B.1-1. Cell 3 shall be configured according to clauses C.1.1 and C.1.2.

Table 10.1.2.4.1-3: General test parameters for EN-DC FR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	One is E-UTRA RF channel and one is NR RF channel
Initial conditions	Active E-UTRA PCell		Cell1	On E-UTRA RF channel number 1.
	Active NR PSCell		Cell3	On NR RF channel number 2.
Final conditions	Active E-UTRA PCell		Cell2	On E-UTRA RF channel number 1.
	Active NR PSCell		Cell4	On NR RF channel number 2.
CP length			Normal	Applicable to Cell1, Cell2, Cell3 and Cell4.
A3-Offset		dB	-1 Note1,2	
Hysteresis		dB	0 Note1	
Time To Trigger		s	0 Note1	
Filter coefficient			0 Note1	L3 filtering is not used
DRX			OFF	Continuous monitoring of primary cell
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between same RAT cells		μs	3	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	Tinterrupt is defined in 38.133 [6] clause 6.1B.1.2
Note 1: Applies to the measurement configuration on E-UTRAN carrier. The measurement configuration on NR carrier is given in Table 10.1.2.4.1-4. Note 2: Includes test tolerance.				

Table 10.1.2.4.1-4: General test parameters for EN-DC FR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 3	On the carrier under CCA
	Neighbouring cell		Cell 4	On the carrier under CCA
Final condition	Active cell		Cell 4	On the carrier under CCA
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause D.7.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause D.7.2.2	
	Semi-static channel access Note 2,3			
A3-Offset		dB	-1 Note4	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells

T304	ms	500	
L_{CCA_DL}		5	
W_{CCA_DL}	ms	T304	
L_{CCA_UL}		5	
W_{CCA_UL}	ms	T304	
T1	s	5	
T2	s	≤ 5	
T3	s	≥ $T_{interrupt}$	$T_{interrupt}$ is defined in 38.133 [6] clause 6.1B.1.2
Note 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only. Note 4: Includes test tolerance.			

10.1.2.4.2 Test procedure

During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 4. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity EN-DC*, *DC bearer MCG and SCG*, *Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 and Cell 3 are the active cells.

2. Set the parameters according to T1 in Tables 10.2.1.5-1 and 10.1.2.5-2. The SS shall enable DL and UL CCA model according to Table 10.1.2.5-2. T1 starts.

3. SS shall transmit an *RRCConnectionReconfiguration* message configuring two event A3 with the corresponding offsets, for both E-UTRA and NR, correspondingly, according to Tables 10.1.2.4.1-3 and 10.1.2.4.1-4.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Tables 10.1.2.5-1 and 10.1.2.5-2. T2 starts.

5. UE shall transmit two *MeasurementReport* messages triggered by Event A3, for both E-UTRA and NR neighbor cells, embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the UE transmits both *MeasurementReport* messages proceed with step 6, otherwise proceed with step 9 once T2 expires.

6. SS shall transmit *RRCConnectionReconfiguration* message to the UE implying EN-DC handover from Cell1+Cell3 to Cell2+Cell4. T3 starts immediately after the end of the last TTI containing the handover request. At that instant the SS shall switch the power settings from T2 to T3 as specified in Tables 10.1.2.5-1 and 10.1.2.5-2.

7. If the UE transmits PRACH to Cell 2 less than 62 ms from the beginning of time period T3, and if the UE transmits PRACH to Cell 4 less than 57+20*(1+ L_2)+10*(1+ L_3) ms, where $L_2 \leq L_{CCA_DL}$= 5 and $L_3 \leq L_{CCA_UL}$= 5, then the number of successful tests is increased by one (the maximum allowed delay is 57+120+60 = 237ms). Otherwise, the number of failure tests is increased by one.

8. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2. After T3 expires proceed with step 9.

9. The SS shall switch off and then on the UE. The SS shall disable the CCA model (both DL and UL) (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1). Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) and set Cell 4 physical cell identity = ((current cell 4 physical cell identity + 3) mod1008) for the next iteration of the test procedure loop.

10. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.1.2.4.3 Message contents

Table 10.1.2.4.3-1: Common Exception messages for EN-DC FR1 Event-triggered reporting tests on PSCC without gaps under non-DRX and CCA

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-4 with A3-offset set as per Table 10.2.1.4.1-3 Table H.3.1-5 Table H.3.1-7 Table H.3.2-2 with Condition RBConfig_KeyChange Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with A3-offset set as per Table 10.2.1.4.1-4 Table H.3.4-10 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

10.1.2.5 Test requirement

Tables 10.1.2.5-1 and 10.1.2.5-2 define the primary level settings including test tolerances for EN-DC FR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA.

Table 10.1.2.5-1: E-UTRAN cell specific test parameters for EN-DC FR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA

Parameter	Unit	Cell1			Cell2		
		T1	T2	T3	T1	T2	T3
Duplex mode		FDD or TDD			FDD or TDD		
TDD special subframe configuration[Note1]		6			6		
TDD uplink-downlink configuration[Note1]		1			1		
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100			5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD			5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD			5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		

OCNG Patterns defined in A.3.2.1 (FDD) and in A.3.2.2(TDD) Note2		5 MHz: OP.20 FDD 10MHz: OP.1 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		OP.18 FDD OP.2 FDD OP.14 FDD OP.10 TDD OP.2 TDD OP.8 TDD	5MHz: OP.18 FDD 10MHz: OP.2 FDD 20MHz: OP.14 FDD 5MHz: OP.10 TDD 10MHz: OP.2 TDD 20MHz: OP.8 TDD		OP.20 FDD OP.1 FDD OP.17 FDD OP.9 TDD OP.1 TDD OP.7 TDD
PRACH configuration		-			4, As specified in table 5.7.1-2 in TS 36.211[24]		
PBCH_RA	dB	0			0		
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB						
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA Note3	dB						
OCNG_RB Note3	dB						
N_{oc} Note4	dBm/15 kHz	-98					
$\hat{E}_s/N_{oc}$	dB	8	8	8	-Infinity	10	10
$\hat{E}_s/I_{ot}$	dB	8	-2.41	-2.41	-Infinity	1.36	1.36
RSRP Note5	dBm/15 kHz	-90	-90	-90	-Infinity	-88	-88
SCH_RP Note5	dBm/15 kHz	-90	-90	-90	-Infinity	-88	-88
Io Note5	dBm/Ch BW	-61.58+10log($N_{RB,c}$/50)	-57.84+10log($N_{RB,c}$/50)		N/A	-57.84+10log($N_{RB,c}$/50)	
Propagation Condition		AWGN					
Antenna Configuration		1x2					

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 10.1.2.5-2: NR cell specific test parameters for EN-DC FR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA

Parameter	Unit	Cell 3			Cell 4		
		T1	T2	T3	T1	T2	T3
NR RF Channel Number		1			1		
P_{CCA_DL} for dynamic channel access Note 4,6	-	$P_{CCA_DL_1}$=0.75			$P_{CCA_DL_1}$=0.75		

			$P_{CCA_DL_2}$=0.75			$P_{CCA_DL_2}$=0.75		
P_{CCA_DL} for semi-static channel access Note 5,6		-	P_{CCA_DL}=0.9375			P_{CCA_DL}=0.9375		
P_{CCA_UL} for dynamic channel access Note 4,6		-	0.75			0.75		
P_{CCA_UL} for semi-static channel access Note 5,6		-	0.87			0.87		
TDD configuration	Config 1, 2		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1, 2		40: $N_{RB,c}$ = 106					
BWP BW	Config 1, 2		40: $N_{RB,c}$ = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference	Config 1, 2		SR.1.1 CCA					
CORESET Reference Channel	Config 1, 2		CR.1.1 CCA					
Dedicated CORESET RMC configuration	Config 1, 2		CCR.1.1 CCA					
TRS configuration	Config 1, 2		TRS.1.1 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
DBT window configuration	Config 1, 2		DBT.1					
SSB configuration for semi-static channel access Note 4, 6	Config 1, 2		SSB.1 CCA					
SSB configuration for dynamic channel access Note 5, 6	Config 1, 2		SSB.2 CCA					
ssb-PositionQCL	Config 1, 2		1					
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1, 2	kHz	30 kHz					
PRACH configuration			FR1 PRACH configuration 1 under CCA					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1, 2	dBm/SCS	-95					
$\hat{E}_s / I_{ot}$		dB	8	-2.41	-2.41	-Infinity	1.36	1.36
$\hat{E}_s / N_{oc}$		dB	8	8	8	-Infinity	10	10
SSB_RP	Config 1, 2	dBm/SCS	-87	-87	-87	-Infinity	-85	-85
Io Note3	Config 1, 2	dBm/38.16MHz	-55.31	-51.56	-51.56	-55.31	-51.56	-51.56
Propagation condition		-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

The UE shall start to transmit the PRACH to Cell 2 less than 60 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover requirements for handover with PSCell for EN-DC is defined in clause 5.9 in 36.133 [23] as:

$D_{HOwithPSCel_PCell} = T_{RRC_delay} + T_{search} + T_{IU} + T_{processing}$

Where:

T_{RRC_delay} = 20 ms for 'RRC connection reconfiguration (NR SCG establishment/ /modification/release)'.

T_{search} = 0 ms for known cell.

T_{IU} = 15 ms in the test configuration.

$T_{processing}$ = 25ms for source Cell and target Cell are in the same FR.

This gives a total of 60ms for handover delay.

The UE shall transmit the PRACH preamble to Cell 4 less than $D_{HOwithPSCell_PSCell}$ from the beginning of time period T3.

NOTE: The PSCell change delay for handover with PSCell for EN-DC is defined in clause 5.8 in 36.133 [23] as:

$D_{HOwithPSCell_PSCell} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU_PSCell} + 2$ ms

Where:

T_{RRC_delay} = 20 ms for 'RRC connection reconfiguration (NR SCG establishment/ /modification/release)'.

$T_{processing}$ = 25ms for source Cell and target Cell are in the same FR.

T_{search} = 0 ms for known cell.

$T_{\Delta} = (1+ L_2) *20$ ms.

$T_{IU} = (1+ L_3) *10 + 10$ ms

L_2 is the number of SMTC occasions not available at the UE during the time tracking period where $L_2 \leq L_{CCA_DL}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{CCA_UL}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [37]. The interruption time considering the potential extensions caused by L_1, L_2, L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [13]. Test equipment should make sure that L_{CCA_DL} and L_{CCA_UL} are not exceeded during a test by monitoring the number of CCA failures and preventing additional CCA failures from happening after L_{CCA_DL} or L_{CCA_UL} is reached.

The rate of correct PSCell addition observed during repeated tests shall be at least 90%.

10.2 Timing

10.2.1 UE transmit timing

10.2.1.0 Minimum conformance requirements

10.2.1.0.1 Minimum conformance requirements for UE transmit timing accuracy

Same as section 4.4.1.0.1 with the following additional considerations:

The term reference cell on a carrier frequency subject to CCA is not available at the UE refers to when at least one SSB is configured by gNB, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available during at least one discovery burst transmission window, at the UE due to DL CCA failures at gNB during the last 1280 ms; otherwise the reference cell on the carrier frequency subject to CCA is considered as available at the UE.

If the UE uses a reference cell on a carrier frequency subject to CCA for deriving the UE transmit timing, then the UE shall meet all the transmit timing requirements defined in TS 38.133 [6] clause 7.1.2 provided that the reference cell is available at the UE. If the reference cell is not available at the UE on a carrier frequency subject to CCA, then the UE is allowed to transmit in the uplink provided that the UE meets all the transmit timing requirements defined in TS 38.133 [6] clause 7.1.2; otherwise the UE shall not transmit any uplink signal.

If a reference cell on a carrier frequency belonging to the PTAG, which is subject to CCA, is not available at the UE then the UE is allowed to use any of available activated SCell(s) at the UE in PTAG as a new reference cell. If the SCell used as reference cell is deactivated, or becomes not available, the UE is allowed to use another active serving cell in PTAG as new reference cell.

If a reference cell on a carrier frequency belonging to the STAG, which is subject to CCA is not available at the UE then the UE is allowed to use any of available activated SCell(s) at the UE in STAG as a new reference cell.

The normative reference for this requirement is TS.38.133 [6] clause 7.1.2.

10.2.1.1 EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

10.2.1.1.1 Test purpose

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb when PSCell is subject to DL CCA and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits.

10.2.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a UL shared spectrum NR carrier.

10.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.2.1.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.10.2.1.1.

10.2.1.1.4 Test Description

10.2.1.1.4.1 Initial Conditions

This test can be run in one of the configurations defined in Table 10.2.1.1.4.1-1.

Table 10.2.1.1.4.1-1: Supported test configurations for EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

Configuration	Description
10.2.1.1-1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.2.1.1-2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to be tested in one of the supported test configurations in FR1 depending on UE capability.	

Configure the test equipment and the DUT according to the parameters in Table 10.2.1.1.4.1-2

Table 10.2.1.1.4.1-2: Initial conditions for EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.2.1.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.2.1.1.4.3.

2. There are one E-UTRAN carrier and one NR carrier cells specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on NR carrier. Cell 2 is subject to CCA. Cell 1 is the cell used for connection setup with the power level set according to Table A.6B.1-1. Cell 2 shall be configured according to clauses C.1.1 and C.1.2.

10.2.1.1.4.2 Test procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell) subject to CCA. Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The downlink timing of the PSCell is changed and the changes in UE transmit timing are observed. The transmit timing is verified by the UE transmitting SRS used as a measurement reference facilitating the SS timing estimation. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test:

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. Set up E-UTRA PCell according to parameters given in Table A.6B.1-1 and setup NR PSCell according to parameters given in Table 10.2.1.1.5-1.

3. The SS shall transmit an RRCConnectionReconfiguration message configuring the UE with the message content defined in clause 10.2.1.1.4.3.

4. The UE shall transmit RRCConnectionReconfigurationComplete message. Afterwards, the SS shall enable DL and UL CCA model according to Table 10.2.1.1.5-1

5. After connection set up with the cell and during 2 seconds before DL timing adjustment, the test equipment shall monitor all SRS transmissions and verify that, for each received SRS, the timing of the NR cell is within (N_{TA} + N_{TA_offset}) $\times T_c \pm T_e$ of the first detected path of DL SSB:

   a. The N_{TA} offset value (in T_c units) is 25600 for FR1.

   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 10.2.1.1.5-4.

6. The test system shall adjust the timing of the DL path by values given in Table 10.2.1.1.4.2-1. For Test 2, the DL timing change shall be applied within the first half of the DRX cycle upon expiration of the preceding DRX ON duration.

Table 10.2.1.1.4.2-1: Adjustment Value for EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

SCS of SSB signals (kHz)	Adjustment Value

	Test1	Test2
30	+32*64T_c	+16*64T_c

7. The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Table 10.2.1.1.5-5. This will only be done for Test1. The test system samples the UE Transmit Timing once per SRS transmission (as per configured SRS periodicity). To check Rule 1, the SS shall check that the maximum time adjustment step size T_q between one SRS transmission to next consecutive SRS transmission of a valid UL slot is within Rule 1 as specified in clause 10.2.1.0.1 and Table 10.2.1.0.1-3. To check that the minimum adjustment rate is within Rule 2 as specified in clause 10.2.1.0.1 and Table 10.2.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 1 + offset seconds sliding window (offset in ms to the next consecutive SRS transmission), with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. To check that the maximum adjustment rate is within Rule 3 as specified in clause 10.2.1.0.1 and Table 10.2.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 200ms - offset sliding window of previous SRS transmission, with step size p (where p is the periodicity of SRS), as long as the resulting slot is a valid UL slot. The three rules apply until the UE transmit timing offset is within the limits specified in 10.2.1.0.1 and Table 10.2.1.0.1-3 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1. The test system will wait till evaluation interval of T seconds is met to ensure UE transmit timing is stable at the end of the step, where T=DL_timing_change[Ts]/6.6Ts and DL_timing_change is specified in Table 10.2.1.1.4.2-1.

8. After the UE transmit timing is within the limits specified in step 7, and during 2 seconds, the test system shall monitor all SRS transmissions and verify that, for each received SRS, the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

10.2.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.2.1.1.4.3-0: Common Exception messages for EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 10.2.1.1.4.3-1: *SRS-Config* : Additional test requirement for EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {			
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {			
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	14		SCS15
	25		SCS30
}			

groupOrSequenceHopping	neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
sl1	0		Test 1
sl320	3		Test 2 and SCS15
sl640	5		Test 2 and SCS30
}			
}			
}			
}			
}			
}			

Table 10.2.1.1.4.3-2: *DRX-Config* : Additional test requirement for EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
DRX-Config ::= CHOICE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms6		
}			
drx-InactivityTimer	ms1		
drx-HARQ-RTT-TimerDL	56		
drx-HARQ-RTT-TimerUL	56		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms320	0		
}			
shortDRX		Not present	
}			

10.2.1.1.5 Test Requirements

Table 10.2.1.1.5-1: Cell Specific Test Parameters for EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

Parameter		Unit	Config	Test1	Test2
SSB ARFCN			1,2	Freq1	Freq1
TDD configuration			1,2	TDDConf.1.1 CCA	
$BW_{channel}$		MHz	1,2	40: $N_{RB,c}$ = 106	
Initial BWP Configuration			1,2	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration			1,2	DLBWP.1.1 ULBWP.1.1	
DRX Cycle		ms	1,2	N/A	DRX.8[Note5]
DL CCA model			1,2	As specified in clause D.7.2.1	
UL CCA model			1,2	As specified in clause D.7.2.2	
PDSCH Reference			1,2	SR.1.1 CCA	
CORESET Reference			1,2	CR.1.1 CCA	
OCNG Patterns			1,2	OCNG pattern 1	
SSB configuration	Semi- static channel access		1,2	SSB.1 CCA	
	Dynamic channel access		1,2	SSB.2 CCA	
SMTC configuration			1,2	SMTC.1 FR1	
TRS configuration			1,2	TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})			1,2	0.9375	0.9375

DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		1,2	0.75	0.75
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		1,2	0.75	0.75
UL CCA probability (P_{CCA_UL})		1,2	1	1
EPRE ratio of PSS to SSS	dB	1,2	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/30 kHz	1,2	-95	-95
$\hat{E}_s / I_{ot}$		1,2	3	3
$\hat{E}_s / N_{oc}$		1,2	3	3
SS-RSRP Note3	dBm/30 kHz	1,2	-92	-92
Io Note3	dBm/38.1MHz	1,2	-59.2	-59.2
Propagation condition		1,2	AWGN	
SRS Config		1,2	SRSConf.1 Note6	SRSConf.2 Note6

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: DRX related parameters are given in Table 10.2.1.1.5-3.

Note 6: SRS configs are given in Table 10.2.1.1.5-2.

Note 7: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause D.7.2.

Note 8: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 10.2.1.1.5-2: SRS Configuration for EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	14 for test configuration 1,2	25	Matches $N_{RB,c}$

		25 for test configuration 3		
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl640, 0	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

Table 10.2.1.1.5-3: DRX-Configuration for EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

Field	Test 2
	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
longDRX-CycleStartOffset	320 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
NOTE: The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [13].	

Table 10.2.1.1.5-4: T_e Timing Error Limit for EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

Frequency Range	SCS of SSB signals (KHz)	SCS of uplink signals s(KHz)	T_e
1	30	15	$9.75*64*T_c$
		30	$9.75*64*T_c$
		60	$8.75*64*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [6].			

Table 10.2.1.1.5-5: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate for EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA

Frequency Range	SCS of uplink signals (KHz)	T_q	T_p	Maximum Adjustment Rate
1	15	$6*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
	30	$6*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
	60	$6*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [6].				

10.2.2 UE timing advance

10.2.2.0 Minimum conformance requirements

The timing advance is initiated from PSCell in EN-DC operation mode with MAC message that implies and adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [12].

10.2.2.0.1 Minimum conformance requirements for timing advance adjustment delay

UE shall adjust the timing of its uplink transmission timing at time slot *n+ k+1* for a timing advance command received in time slot *n*, and the value of *k* is defined in clause 4.2 in TS 38.213 [3]. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

10.2.2.0.2 Minimum conformance requirements for timing advance adjustment accuracy

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 10.2.2.0.2-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS 38.213 [3].

Table 10.2.2.0.1-1: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	15	30	60	120	480	960
UE Timing Advance adjustment accuracy	±256 T_c	±256 T_c	±128 T_c	±32 T_c	±10 T_c	±6 T_c

The normative reference for this requirement is TS.38.133 [6] clause A.10.2.2.1.

10.2.2.1 EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA

10.2.2.1.1 Test purpose

The purpose of the test is to verify UE timing advance adjustment delay and accuracy requirement defined in clause 7.3 of TS 38.133 [6].

10.2.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a UL shared spectrum NR carrier.

10.2.2.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 10.2.2.0.1 and clause 10.2.2.0.2.

The normative reference for this requirement is TS.38.133 [6] clause A.10.2.2.1.

10.2.2.1.4 Test description

10.2.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.2.2.1.4.1-1.

Table 10.2.2.1.4.1-1: Supported test configurations for EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA

Test Case ID	Description
10.2.2.1.4.1-1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.2.2.1.4.1-2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 10.2.2.1.4.1-2

Table 10.2.2.1.4.1-2: Initial conditions for EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 10.2.2.1.4.1-1	

Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

Table 10.2.2.1.4.1-3: General test parameters for EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA

Parameter	Unit	Value	Comment
RF channel number		Cell 1: 1 Cell 2: 2	1 for E-UTRAN PCell 2 for NR PSCell
Initial DL BWP		DLBWP.0.1	As specified in Table A.8.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.8.1-2
Initial UL BWP		ULBWP.0.1	As specified in Table A.8.2-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.8.2-2
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	*For 30 kHz SCS* $N_{TA_new} = N_{TA_old} + 4096*T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

1. Message contents are defined in clause 10.2.2.1.4.3.

2. There are one E-UTRAN carrier and one NR carrier cells specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on NR carrier. Cell 2 is subject to CCA. Cell 1 is the cell used for connection setup with the power level set according to Table A.6.1.1-1. Cell 2 shall be configured according to clauses C.1.1 and C.1.2.

10.2.2.1.4.2 Test Procedure

The test consists of two cells, a single E-UTRA cell (Pcell), and a single NR cell (PSCell) subject to CCA. Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. Cell 1 is the PCell in the primary Timing Advance Group (pTAG) and cell 2 is the PSCell is in the secondary Timing Advance Group (sTAG). The test consists of two successive time periods, with time durations of T1 and T2 respectively. In each time period, timing advance commands for sTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in Table 10.2.2.1.4.1-3 and Table 10.2.2.1.5-2, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PSCell in sTAG. The UE Time Alignment Timer (timeAlignmentTimer IE), described in Clause 5.2 in TS 38.321 [12], shall be configured so that it does not expire in the duration of the test. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i} = P_{CCA_UL} = 1$) at the start of the test

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Message contents are defined in clause 10.2.2.1.4.3.

2. Set the parameters according to values in Tables 10.2.2.1.4.1-3 and Table 10.2.2.1.5-1 as appropriate. Propagation conditions are set according to clause C.2.2.

3. SS shall transmit an *RRCConnectionReconfiguration* message.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. Afterwards, the SS shall enable DL and UL CCA model according to Table 10.2.2.1.5-1.

5. During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for sTAG, as specified in clause 6.1.3.4 in TS 38.321 [12]. The Timing Advance Command

value shall be set to 31, which according to clause 4.2 in TS 38.213 [8] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for sTAG used by the UE is established.

6. During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value of 39 as specified in Table 10.2.2.1.4.1-3.

7. This value shall result in changes of the timing advance for sTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

8. As specified in clause 7.3.2.1 of TS 38.133 [6], the UE adjusts its uplink timing at slot n+k+1 for a timing advance command received in slot n. This delay should be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

9. The UE Time Alignment Timer, described in clause 5.2 in TS 38.321 [12], shall be configured so that it does not expire in the duration of the test.

10. The result from the SRS and adjustment of the timing advance in step 7) is used to measure that the UE adjusts the timing of its transmission with a relative accuracy better than or equal to value specified in Table 10.2.2.0.1-1 to the signalled timing advance value compared to the timing of preceding uplink transmission.

11. If the UE adjust the timing of its transmission within a relative accuracy greater than or equal to value specified in Table 10.2.2.0.1-1 to the signalled timing advance value compared to the timing of preceding uplink transmission then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

12. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

13. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit RRCConnectionReconfigurationComplete message.

14. If any of the above Reconfiguration in Step 12 or 13 fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

15. Repeat steps 3-14 until the confidence level according to Annex G clause G.2.7 is achieved.

10.2.2.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3, with the following exceptions:

Table 10.2.2.1.4.3-0: Common Exception messages for EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 10.2.2.1.4.3-1: *srs-Config* setup for EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA

Derivation Path: TS 38.508-1, Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			

Derivation Path: TS 38.508-1, Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {	1 entry		
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {	1 entry		
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	12		Config 1,2,4,5
	24		Config 3,6
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
sl5	2	Once every 5 Slots	SCS15
sl5	4	Once every 5 Slots	SCS30
}			
}			
}			
}			
}			
}			

10.2.2.1.5 Test Requirement

The UE shall apply the signalled Timing Advance value for PSCell in sTAG to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where:

$k = 5$ for Config 1, 2, 3, 4, 5, 6

The Timing Advance adjustment accuracy for PSCell in sTAG shall be within the limits specified in Table 10.2.2.1.5-3.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90 %.

Table 10.2.2.1.5-1 and Table 10.2.2.1.5-2 define the primary level settings.

Table 10.2.2.1.5-1: Cell specific test parameters for EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA

Parameter			**Unit**	**Test1**	
				T1	**T2**
TDD configuration		Config 1,2		TDDConf.1.1 CCA	
$BW_{channel}$		Config 1,2	MHz	40: $N_{RB,c}$ = 106	
BWP BW		Config 1,2	MHz	40: $N_{RB,c}$ = 106	
DRX Cycle		Config 1,2	ms	Not Applicable	
DL CCA model		Config 1,2		As specified in clause D.7.2.1	
UL CCA model		Config 1,2		As specified in clause D.7.2.2	
PDSCH Reference		Config 1,2		SR.1.1 CCA	
CORESET Reference		Config 1,2		CR.1.1 CCA	
TRS configuration		Config 1,2		TRS.1.2 TDD	
OCNG Patterns		Config 1,2		OCNG pattern 1	
	Semi-static	Config 1,2		SSB.1 CCA	

SSB Configuration	channel access			
	Dynamic channel access	Config 1,2		SSB.2 CCA
SMTC configuration		Config 1,2		SMTC.1 FR1
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1,2		1
UL CCA probability P_{CCA}		Config 1,2		1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		Config 1,2	dBm/30 kHz	-95
		Config 3,6		-95
$\hat{E}_s / I_{ot}$			dB	3
$\hat{E}_s / N_{oc}$			dB	3
Io Note3		Config 1,2	dBm/38.16MHz	-62.58
Propagation condition			-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause D.7.2.

Note 5: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 10.2.2.1.5-2: Sounding Reference Symbol Configuration for EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA

Field		Value	Comment
c-SRS	Config 1,2	24	Frequency hopping is disabled
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.

nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [13].		

Table 10.2.2.1.5-3: UE Timing Advance adjustment accuracy for EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA

Sub Carrier Spacing, SCS kHz	15	30	60
UE Timing Advance adjustment accuracy	±344 T_c	±344 T_c	±216 T_c

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95 %.

10.3 Signalling characteristics

10.3.1 Radio link monitoring

10.3.1.0 General

The requirements in this section apply for radio link monitoring on a carrier frequency with CCA for the following cells:

- PCell in SA NR operation mode,
- PSCell in EN-DC operation mode.
- PSCell in NR-DC operation mode.

The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell and PSCell as specified in TS 38.213 [8]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds $Q_{out,CCA}$ and $Q_{in,CCA}$ for the purpose of monitoring downlink radio link quality of the cell.

The threshold $Q_{out,CCA}$ is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out,CCA}$) as defined in Table 10.3.1.0-1. For SSB based radio link monitoring, $Q_{out_SSB,CCA}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 10.3.1.0.1-1.

The threshold $Q_{in,CCA}$ is defined as the level at which the downlink radio link quality can be received with significantly higher reliability than at $Q_{out,CCA}$ and shall correspond to the in-sync block error rate ($BLER_{in}$) as defined in Table 10.3.1.0-1. For SSB based radio link monitoring, $Q_{in_SSB,CCA}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 10.3.1.0.1-2.

The out-of-sync block error rate ($BLER_{out,CCA}$) and in-sync block error rate ($BLER_{in,CCA}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *rlmInSyncOutOfSyncThreshold* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 10.3.1.0-1 as default. All requirements in clause 10.3.1.0 are applicable for BLER Configuration #0 in Table 10.3.1.0-1.

Table 10.3.1.0-1: Out-of-sync and in-sync block error rates

Configuration	$BLER_{out,CCA}$	$BLER_{in,CCA}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [8], where N_{RLM} is specified in Table 10.3.1.0-2, and meet the requirements as specified in clause 10.3.1.0. UE is not required to meet the requirements in clause 10.3.1.0 if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 10.3.1.0-2: Maximum number of RLM-RS resources N_{RLM}

Carrier frequency range of PCell/PSCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1	8	4

In the requirements of clause 10.3.1.0, the term RLM-RS SSB occasion not available at the UE refers to when the RLM-RS SSB is configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the set of configured RLM-RS resources are not available at the UE due to DL CCA failures at gNB during the corresponding evaluation period; otherwise the RLM-RS SSB is considered as available at the UE.

The requirements in clause 10.3.1.0 apply for any *channelAccessMode* configuration [TS 38.331, 13].

The normative reference for this requirement is TS 38.133 [6] clause 8.1A.1.

10.3.1.0.1 Minimum conformance requirements for SSB based Radio Link Monitoring under CCA

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell or PSCell, provided that the SSB configured for RLM are actually configured to be transmitted within UE active DL BWP during the entire evaluation period specified in clause 10.3.1.0.1.1 but occasionally may not be transmitted due to CCA operation.

Table 10.3.1.0.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4 dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4 dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 10.3.1.0.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB

Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

The normative reference for this requirement is TS 38.133 [6] clause 8.1A.2.1.

10.3.1.0.1.1 Minimum requirement for SSB based Radio Link Monitoring under CCA

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB,CCA}$ [ms] period becomes worse than the threshold $Q_{out_SSB,CCA}$ within $T_{Evaluate_out_SSB,CCA}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_SSB,CCA}$ [ms] period becomes better than the threshold $Q_{in_SSB,CCA}$ within $T_{Evaluate_in_SSB,CCA}$ [ms] evaluation period. During the in-sync evaluation procedure, layer 1 of the UE shall not send any in-sync indication for the cell to the higher layers when L_{in} exceeds $L_{in,max}$, where L_{in} and $L_{in,max}$ are defined in Table 10.3.1.0.1.1-1.

$T_{Evaluate_out_SSB,CCA}$ and $T_{Evaluate_in_SSB,CCA}$ are defined in Table 10.3.1.0.1.1-1 for FR1.

When concurrent gaps are configured,

- P value for an RLM-RS resource to be measured is defined as N_{total} / $N_{outside_MG}$
- For a window W of duration max(T_{L1}, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap and per-FR measurement gap within the same FR as serving cell, and starting at the beginning of any RLM-RS resource occasion:
  - N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions within the window, and
  - $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{xGP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, and these GAPs are overlapping with some but not all occasions of the SSB RLM-RS resources; and
- P=1 when in the monitored cell there are no GAPs overlapping with any occasion of the SSB RLM-RS resources.

When a measurement gap is configured and the measurement gap is not NCSG,

- an RLM-RS resource is considered to be overlapped with the GAP f it overlaps a measurement gap occasion, and
- xRP = MGRP

Otherwise, when NCSG measurement gap is configured,

- an RLM-RS resource is considered to be overlapped with the GAP if it overlaps the VIL1 or VIL2 of NCSG, and
- xRP = VIRP

If the UE is configured with Pre-MG, an RLM-RS resource is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

When concurrent gaps are configured, an RLM-RS is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 38.133 [6] section 9.1.8.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and GAP configurations does not meet previous conditions.

Table 10.3.1.0.1.1-1: Evaluation period $T_{Evaluate_out_SSB,CCA}$ and $T_{Evaluate_in_SSB,CCA}$ for FR1

Configuration	$T_{Evaluate_out_SSB,CCA}$ (ms)		$T_{Evaluate_in_SSB,CCA}$ (ms)
	RLM-RS SSB Es/Iot[Note4] ≥-7 dB	RLM-RS SSB Es/Iot[Note4] <-7 dB	
no DRX	Max(200, Ceil(17*P)*T_{SSB})	Max(200, Ceil(24*P)*T_{SSB})	Max(100, Ceil((5+L_{in})*P)*T_{SSB})
DRX cycle≤320	Max(200, Ceil(1.5*15*P)*Max(T_{DRX},T_{SSB}))	Max(200, Ceil(1.5*20*P)*Max(T_{DRX},T_{SSB}))	Max(100, Ceil(1.5*(5+L_{in})*P)*Max(T_{DRX},T_{SSB}))
DRX cycle>320	Ceil(13*P)*T_{DRX}	Ceil(16*P)*T_{DRX}	Ceil((5+L_{in})*P)*T_{DRX}

NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.
NOTE 2: When DRX is not configured, L_{in} is the number of RLM-RS SSB occasions which are not available at the UE during $T_{Evaluate_in_SSB,CCA}$, where $L_{in} \le L_{in,max}$. When DRX is configured, L_{in} is the number of DRX cycles in which at least one RLM-RS SSB occasion is not available at the UE during $T_{Evaluate_in_SSB,CCA}$, where $L_{in} \le L_{in,max}$. The UE is not required to determine the availability of SSB occasions more frequent than
Once per Max(10ms, P * T_{SSB}) if no DRX is used,
Once per Max(10ms, Ceil(1.5 * P) * Max(T_{DRX}, T_{SSB})) if DRX cycle ≤ 320ms,
Once per P * T_{DRX} if DRX cycle > 320ms.
NOTE 3: $L_{in,max}$=7 for Max(T_{DRX},T_{SSB}) ≤ 40 assuming T_{DRX}=0 for non-DRX case,
$L_{in,max}$=5 for 40<Max(T_{DRX},T_{SSB})≤320,
$L_{in,max}$=3 for T_{DRX}>320.
NOTE 4: RLM-RS SSB Es/Iot is the averaged Es/Iot over the most recent previous out-of-sync evaluation period.

The normative reference for this requirement is TS 38.133 [6] clause 8.1A.2.2.

10.3.1.0.1.2 Measurement restrictions for SSB based RLM under CCA

The UE is required to be capable of measuring SSB for RLM without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

For FR1, when the SSB for RLM is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure SSB for RLM.

The normative reference for this requirement is TS 38.133 [6] clause 8.1A.2.3.

10.3.1.1 Requirements for determining UE in-sync or out-of-sync status

In the test cases specified in clause 10.3.1, any uplink signal transmitted by the UE is used for detecting the in-/out-of-sync state of the UE. In terms of measurement, the uplink signal is verified based on the UE output power:

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [4]) means uplink signal
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [4]) means no uplink signal.

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.1.1.

10.3.1.2 EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

10.3.1.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 10.3.1.0

10.3.1.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier, and supporting UL and SSB-based RLM on shared channel access.

10.3.1.2.3 Minimum conformance requirement

The minimum requirements are specified in clause 10.3.1.0.1. The measurement restrictions for SSB based RLM under CCA are specified in clause 10.3.1.0.2. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.1.2.

10.3.1.2.4 Test description

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 10.3.1.2.4.1-1. The test parameters are given in Tables 10.3.1.2.4.1-3, 10.3.1.2.5-1, and 10.3.1.2.5-2 below.

The test consists of three successive time periods, with time duration of T1, T2 and T3, respectively. Figure 10.3.1.2.4-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40 ms) in the test.

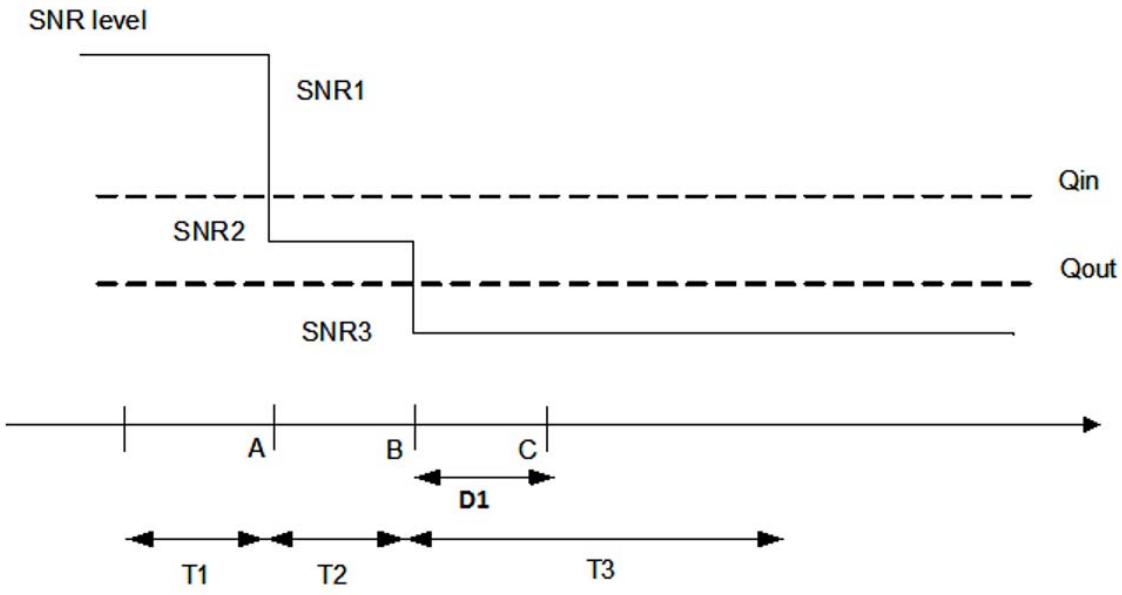

Figure 10.3.1.2.4-1: SNR variation for EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

10.3.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.3.1.2.4.1-1.

Table 10.3.1.2.4.1-1: Supported test configurations for EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Configuration	Description
10.3.1.2-1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.3.1.2-2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Configure the test equipment and the DUT according to the parameters in Table 10.3.1.2.4.1-2.

Table 10.3.1.2.4.1-2: Initial conditions for EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.3.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.3.1.2.4.3.

2. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2.

3. The test parameters are given in Table 10.3.1.2.4.1-3 below.

Table 10.3.1.2.4.1-3: General test parameters for EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter			Unit	Value
				Test 1
Active E-UTRA PCell				Cell 1
E-UTRA RF Channel Number				1
Active PSCell				Cell 2
RF Channel Number				2
DL CCA model				As specified in clause D.7.2.1
UL CCA model				As specified in clause D.7.2.2
Duplex mode		Config 1,2		TDD
$BW_{channel}$		Config 1,2	MHz	40: $N_{RB,c}$ = 106
DL initial BWP configuration		Config 1,2		DLBWP.0.1
DL dedicated BWP configuration		Config 1,2		DLBWP.1.1
UL initial BWP configuration		Config 1,2		ULBWP.0.1
UL dedicated BWP configuration		Config 1,2		ULBWP.1.1
TDD configuration		Config 1,2		TDDConf.1.1 CCA
CORESET Reference Channel		Config 1,2		CR.1.1 CCA
SSB configuration for semi-static channel access[Note 4, 6]		Config 1,2		SSB.1 CCA
SSB configuration for dynamic channel access[Note 5, 6]		Config 1,2		SSB.2 CCA
DBT window configuration		Config 1,2		DBT.1
PDSCH/PDCCH subcarrier spacing		Config 1,2		30 kHz
PRACH Configuration		Config 1,2		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				OFF
Gap pattern ID				gp0
Layer 3 filtering				Enabled
T310 timer			ms	0
T311 timer			ms	1000
N310				1
N311				1
CSI-RS configuration for CSI reporting		Config 1,2		CSI-RS.2.1 TDD
CSI-RS for tracking		Config 1,2		TRS.1.2 TDD

T1	s	0.2
T2	s	1.04
T3	s	1.04
D1	s	1
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 3: E-UTRAN is in non-DRX mode under test. NOTE 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.		

10.3.1.2.4.2 Test Procedure

There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 10.3.1.2.4.1-4. The UE transmits the reporting according to UL CCA model. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40 ms) in test 1. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.

2. The SS shall transmit an *RRCConnectionReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) configuring the UE for inter-frequency measurements with the corresponding gap pattern and periodic CSI reporting.

3. The UE shall transmit *RRCReconfigurationComplete* message (embedded in *RRCConnectionReconfigurationComplete* message).

4. Set the parameters according to T1 in Table 10.3.1.2.5-1. Propagation conditions are set according to clause C.2.3. The SS shall enable DL and UL CCA model according to Table 10.3.1.2.5-1. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 10.3.1.2.5-1

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 10.3.1.2.5-1

7. If the SS:

   a) detects uplink power equal to or higher than minimum output power, according to section 10.3.1.1, in each uplink slot configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2), provided that such slot is not subject to CCA failure (as determined by P_{CCA_UL} in Table 10.3.1.2.5-1), during the period from time point A to time point B; and

   b) does not detect any uplink power higher than OFF power, according to section 10.3.1.1, from time point C (D1 after the start of T3) until T3 expires, the number of successful tests is increased by one.

   Otherwise, the number of failed tests is increased by one and proceed to step 10.

8. When T3 expires the SS shall disable the DL and UL CCA model (i.e. PCCA_DL_i= PCCA_UL=1) and change the SNR value to T1 as specified in Table 10.3.1.2.5-1.

9. If the UE has re-established the connection within 2 seconds, proceed with step 11. Otherwise, proceed with step 10.

10. The SS shall switch off and then on the UE and then proceed with step 1.

11. Repeat steps 4-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.3.1.2.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 10.3.1.2.4.3-1: Common Exception messages for EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-6 with conditions gapUE and RLM Table H.3.1-8 with Condition SSB RLM Table H.3.4-4 with Condition gapUE Table H.3.5-4 Table H.3.5-9 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 10.3.1.2.4.3-2: *RLF-TimersAndConstants* for EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

10.3.1.2.5 Test Requirement

Table 10.3.1.2.5-1 and Table 10.3.1.2.5-2 define the cell specific primary level settings including test tolerances and the measurement gap configuration for EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA.

Table 10.3.1.2.5-1: Cell-specific test parameters for EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter		Unit	Test 1		
			T1	T2	T3
DL CCA probability P_{CCA_DL}	Note 6,8		P_{CCA_DL}=0.9375		
	Note 7,8		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		
UL CCA probability P_{CCA_UL}			1		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
$SNR^{Note\ 3,4}$ on RLM-RS	Config 1,2	dB	1.8	-6.2	-15.8

SNR on other channels and signals	Config 1,2	dB	1
N_{oc}	Config 1,2	dBm/ SCS	-95
Propagation condition			TDL-C 300 ns 100 Hz

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows.
NOTE 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3, respectively, in Figure 10.3.1.2.4-1.
NOTE 5: The SNR values are specified for testing a UE which supports 2 RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 is defined in section D.4A.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 10.3.1.2.5-2: Measurement gap configuration for EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Field	Test 1
	Value
gapOffset	0

NOTE 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned.
NOTE 2: Ensure that RLM RS is partially overlapped with measurement gap.

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows.

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting, provided that such slots are not subject to CCA failure.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90 %.

10.3.1.3 EN-DC FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

10.3.1.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 10.3.1.0.

10.3.1.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and supporting UL and SSB-based RLM on shared channel access.

10.3.1.3.3 Minimum conformance requirements

The minimum requirements are specified in clause 10.3.1.0.1. The measurement restrictions for SSB based RLM under CCA are specified in clause 10.3.1.0.2. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.1.3.

10.3.1.3.4 Test description

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to '*rlf*'. Supported test configurations are shown in table10.3.1.3.4.1-1. The test parameters are given in Tables10.3.1.3.4.1-3, and 10.3.1.3.5-1 below.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 10.3.1.3.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model.

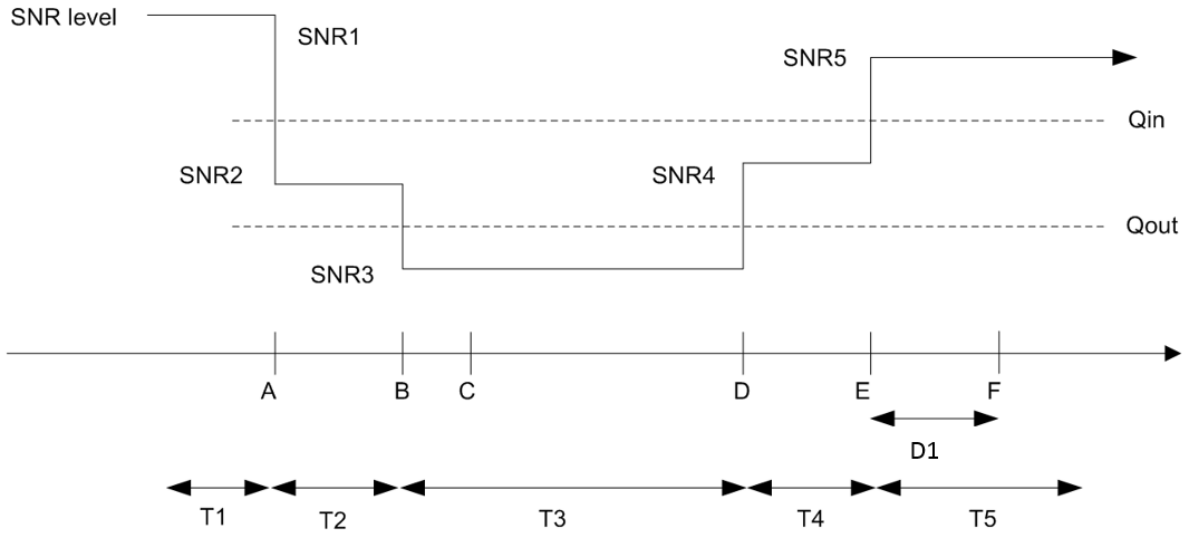

Figure 10.3.1.3.4-1: SNR variation for EN-DC FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

10.3.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.3.1.3.4.1-1.

Table 10.3.1.3.4.1-1: Supported test configurations for EN-DC FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Configuration	Description
10.3.1.3-1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.3.1.3-2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Configure the test equipment and the DUT according to the parameters in Table 10.3.1.3.4.1-2.

Table 10.3.1.3.4.1-2: Initial conditions for EN-DC FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.3.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.3.1.3.4.3.
2. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is NR FR1 PSCell. The connection setup is done according to the settings in clause C.1.3, and the downlink signal levels as per clause C.1.2
3. The general test parameters are given in Table 10.3.1.3.4.1-4.

Table 10.3.1.3.4.1-4: General test parameters for EN-DC FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
DL CCA model			As specified in clause D.7.2.1
UL CCA model			As specified in clause D.7.2.2
Duplex mode	Config 1,2		TDD
$BW_{channel}$	Config 1,2	MHz	40: $N_{RB,c}$ = 106
DL initial BWP configuration	Config 1,2		DLBWP.0.1
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1
UL initial BWP configuration	Config 1,2		ULBWP.0.1
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1
TDD Configuration	Config 1,2		TDDConf.1.1 CCA
CORESET Reference Channel	Config 1,2		CR.1.1 CCA
SSB configuration for semi-static channel access Note 3, 5	Config 1,2		SSB.1 CCA
SSB configuration for dynamic channel access Note 4,5	Config 1,2		SSB.2 CCA
DBT window configuration	Config 1,2		DBT.1
PDSCH/PDCCH subcarrier spacing	Config 1,2		30 kHz

PRACH Configuration	Config 1,2		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N/A
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,2		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.52
T4		s	0.2
T5		s	2.04
D1		s	2

NOTE 1: All configurations are assigned to the UE prior to the start of time period T1.
NOTE 2: UE-specific PDCCH is not transmitted after T1 starts.
NOTE 3: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 4: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

10.3.1.3.4.2 Test procedure

There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 10.3.1.3.4.1-4. The UE transmits the reporting according to UL CCA model. In the test, DRX configuration is not enabled. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [6] clause 4.5.
2. The SS shall transmit an *RRCConnectionReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) to configure periodic CSI reporting.
3. The UE shall transmit *RRCReconfigurationComplete* message (embedded in *RRCConnectionReconfigurationComplete* message).
4. Set the parameters of NR Cell according to T1 in Table 10.3.1.3.5-1. Propagation conditions are set according to clause C.2.3. The SS shall enable DL and UL CCA model according to Table 10.3.1.3.5-1. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 10.3.1.2.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 10.3.1.2.5-1. T3 starts.
7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 10.3.1.3.5-1. T4 starts.
8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 10.3.1.3.5-1. T5 starts.
9. If the SS detects uplink power equal to or higher than minimum output power, according to section 10.3.1.1, in each uplink slot configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2), provided that such slot is not subject to CCA failure (as determined by P_{CCA_UL} in Table 10.3.1.3.5-1), during the period from time point A to time point F (D1 seconds after the start of time duration T5), the number of successful tests is increased by one. After the expiration of T5, the SS shall disable the DL and UL CCA model (i.e. PCCA_DL_i= PCCA_UL=1) and proceed with step 11 for the next iteration, or with step 10.

   Otherwise, the number of failed tests is increased by one and proceed with step 10.
10. The SS shall switch off and then on the UE and then proceed with step 1.
11. Repeat steps 4-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.3.1.3.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 10.3.1.3.4.3-1: Common Exception messages for EN-DC FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of [High] range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-8 with Condition SSB RLM Table H.3.5-4 Table H.3.5-9 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 10.3.1.3.4.3-2: *RLF-TimersAndConstants* for EN-DC FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms2000		
n310	n1		
t311	ms1000		
n311	n1		
}			

10.3.1.3.5 Test Requirement

Table 10.3.1.3.5-1 defines the cell specific primary level settings including test tolerances for EN-DC FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA.

Table 10.3.1.3.5-1: Cell-specific test parameters for EN-DC FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter		**Unit**	**Test 1**				
			T1	**T2**	**T3**	**T4**	**T5**
DL CCA probability P_{CCA_DL}	Note 6,8		P_{CCA_DL}=0.9375				
	Note 7,8		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75				
UL CCA probability P_{CCA_UL}			1				
L_{CCA_DL}			7				
W_{CCA_DL}		ms	$T_{Evaluate_in_SSB,CCA}$ NOTE 9				
EPRE ratio of PDCCH DMRS to SSS		dB	4				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,2	dB	1.8	-6.2	-15.8	-5.3	1.8
SNR on other channels and signals	Config 1,2	dB	1				
N_{oc}	Config 1,2	dBm/ SCS	-95				
Propagation condition			TDL-C 300ns 100Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows.
NOTE 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 10.3.1.3.4-1.
NOTE 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 and T4 is modified as specified in clause D.4A.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.
NOTE 9: As defined in Table 10.3.1.0.1.1-1.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting, provided that such slots are not subject to CCA failure.

The rate of correct events observed during repeated tests shall be at least 90% with a confidence interval of 95 %.

10.3.1.4 Void

10.3.1.5 Void

10.3.2 Void

10.3.3 SCell activation and deactivation delay

10.3.3.0 Minimum Conformance Requirements

10.3.3.0.1 SCell Activation Delay Requirement for Deactivated SCell under CCA

The requirements in this clause shall apply for the UE configured with one downlink SCell operating with CCA in EN-DC or in standalone NR carrier aggregation and when one SCell operating with CCA is being activated but none of the RRC parameters *CO-DurationPerCell-r16*, *SlotFormatIndicator*, and *CSI-RS-ValidationWith-DCI-r16* is configured and all of the CSI reporting resources for being-activated SCell are available.

The delay within which the UE shall be able to activate the deactivated SCell depends upon the specified conditions.

Upon receiving SCell activation command in slot *n*, the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot $n + (T_{HARQ} + T_{activation_time_withCCA} + T_{CSI_reporting_withCCA})/NR_slot_length$, where:

- T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [8]. In the event of UE not being able to transmit the acknowledgment due to UL CCA failures: T_{HARQ} is extended to also include the time to all next HARQ feedback transmission and retransmission opportunities, until the time of its successful transmission, as specified in TS 38.213 [8]; no extension of T_{HARQ} due to UL CCA failures is allowed for Type 2C UL channel access procedure as defined in TS 37.213 [37].
  - $T_{activation_time_withCCA}$ is the SCell activation delay in millisecond.
    - If the SCell is known and belongs to FR1, $T_{activation_time_withCCA}$ is:
      - $T_{FirstSSB} + L_1 * T_{rs}$ + 5ms, if the measurement period of the SCell being activated is equal to or smaller than 2400ms.
      - $T_{FirstSSB_MAX} + L_{2,1} * T_{SMTC_MAX} + (1 + L_{2,2}) * T_{rs}$ + 5ms, if the measurement period of the SCell being activated is larger than 2400ms.
    - If the SCell is unknown and belongs to FR1, provided that the side condition $\hat{E}s/Iot \geq -2$ dB is fulfilled and the SCell can be successfully detected in one attempt, $T_{activation_time_withCCA}$ is:
    - $T_{FirstSSB_MAX} + (1 + L_{3,1}) * T_{SMTC_MAX} + (2 + L_{3,2}) * T_{rs}$ + 5ms.- If the SCell being activated belongs to FR2-2 and if there is at least one active serving cell on that FR2-2 band, if the UE supporting *scellWithoutSSB* is not provided with any SMTC for the target SCell, $T_{activation_time_withCCA}$ is 3 ms, provided
      - the RS (s) of SCell being activated is (are) QCL-TypeD with RS (s) of one active serving cell on that FR2-2 band.
    - If the SCell being activated belongs to FR2-2 and if there is no active serving cell on that FR2-2 band provided that PCell or PSCell is in FR1 or in FR2-2:

- If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{activation_time_withCCA}$ is:
  - 3ms + max($T_{uncertainty_MAC}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$), where $T_{uncertainty_MAC}$=0 and $T_{uncertainty_SP}$=0 if UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation command at the same time.
- If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{activation_time}$ is:
  - max($T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$, $T_{uncertainty_RRC}$ + T_{RRC_delay}-T_{HARQ}), where $T_{uncertainty_MAC}$=0 if UE receives the SCell activation command and TCI state activation commands at the same time.
- If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, then $T_{activation_time_withCCA}$ is:
  - 6ms + $T_{FirstSSB_MAX}$ + (23+[N*$L_{4,1}$])*T_{SMTC_MAX} + (12+[N *$L_{4,2}$])*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + T_{HARQ} + max($T_{uncertainty_MAC}$ + $T_{FineTiming}$ + 2ms, $T_{uncertainty_SP}$).
- If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}s/Iot \geq -2dB$ is fulfilled, then $T_{activation_time_withCCA}$ is:
  - 3ms + $T_{FirstSSB_MAX}$ + (23+[N*$L_{5,1}$])*T_{SMTC_MAX} + (12+[N *$L_{5,2}$])*T_{rs} + $T_{L1\text{-}RSRP,\ measure}$ + $T_{L1\text{-}RSRP,\ report}$ + max {(T_{HARQ} + $T_{uncertainty_MAC}$ + 5ms + $T_{FineTiming}$), ($T_{uncertainty_RRC}$ + T_{RRC_delay})}.

Where,

T_{SMTC_MAX}:

- In case of intra-band SCell activation, T_{SMTC_MAX} is the longest SMTC periodicity between active serving cells and SCell being activated provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot;
- In case of inter-band SCell activation, T_{SMTC_MAX} is the SMTC periodicity of SCell being activated;
- T_{SMTC_MAX} is bounded to a minimum value of 10ms.

T_{rs} is the SMTC periodicity of the SCell being activated if the UE has been provided with an SMTC configuration for the SCell in SCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement which involves T_{rs} is applied with T_{rs} = 5ms assuming the SSB transmission periodicity is 5ms. There are no requirements if the SSB transmission periodicity is not 5ms

$T_{FirstSSB}$: is the time to the end of the first complete configured SSB burst indicated by the SMTC after slot n + (T_{HARQ}+3ms)/*NR_slot_length*

$T_{FirstSSB_MAX}$: is the time to the end of first complete configured SSB burst indicated by the SMTC after slot n + (T_{HARQ}+3ms)/*NR_slot_length* when all active serving cells and SCells being activated or released have configured SSB bursts in the same slot for intra-band scenario. In case of inter-band SCell activation, $T_{FirstSSB_MAX}$ is the time to the end of the first complete configured SSB burst of the SCell being activated. In FR2-2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

L_1 ($L_1 \leq L_{1,max}$) is the number of configured SMTC occasions not available at the UE. $L_{1,max}$ = 2 if $T_{rs} \leq 40$ ms; otherwise $L_{1,max}$ = 1.

$L_{2,1}$ ($L_{2,1} \leq L_{2,1,max}$) and $L_{3,1}$ ($L_{3,1} \leq L_{3,1,max}$) are the numbers of configured SMTC occasions not available at the UE, for a known and unknown SCell activation respectively,

in the SCell being activated, for inter-band scenario, or

in any of the SCells already activated or being activated provided their cell specific reference signals are configured in the same slot, for intra-band scenario

and $L_{2,1,max} = 2$ if $T_{SMTC_MAX} \leq 40$ ms; otherwise $L_{2,1,max} = 1$. $L_{3,1,max} = 2$ if $T_{SMTC_MAX} \leq 40$ ms; otherwise $L_{3,1,max} = 1$.

$L_{2,2}$ ($L_{2,2} \leq L_{2,2,max}$) and $L_{3,2}$ ($L_{3,2} \leq L_{3,2,max}$) are the number of configured SMTC occasions not available at the UE in the SCell being activated. $L_{2,2,max} = 2$ if $T_{rs} \leq 40$ ms; otherwise $L_{2,2,max} = 1$. $L_{3,2,max} = 2$ if $T_{rs} \leq 40$ ms; otherwise $L_{3,2,max} = 1$.

N = TBD for an FR2-2 unknown SCell activation.

$L_{4,1}$ ($L_{4,1} \leq L_{4,1,max}$) and $L_{5,1}$ ($L_{5,1} \leq L_{5,1,max}$) are the numbers of SMTC occasions groups not available at the UE, for an FR2-2 unknown SCell activation,

in the SCell being activated, for inter-band scenario, or

in any of the SCells already activated or being activated provided their cell specific reference signals are configured in the same slot, for intra-band scenario

and $L_{4,1,max} = 2$ if $T_{SMTC_MAX} \leq 40$ ms; otherwise $L_{4,1,max} = 1$. $L_{5,1,max} = 2$ if $T_{SMTC_MAX} \leq 40$ ms; otherwise $L_{5,1,max} = 1$.

$L_{4,2}$ ($L_{4,2} \leq L_{4,2,max}$) and $L_{5,2}$ ($L_{5,2} \leq L_{5,2,max}$) are the number of SMTC occasions groups not available at the UE in the FR2-2 unknown SCell being activated. $L_{4,2,max} = 2$ if $T_{rs} \leq 40$ ms; otherwise $L_{4,2,max} = 1$. $L_{5,2,max} = 2$ if $T_{rs} \leq 40$ ms; otherwise $L_{5,2,max} = 1$.

$T_{FineTiming}$ is the time period between UE finish processing the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and the timing of first complete available SSB corresponding to the TCI state.

$T_{L1\text{-}RSRP,\ measure}$ is L1-RSRP measurement delay $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$ ms as defined in 38.133 [6] clause 9.5A.4.1 with the assumption of M=1.

$T_{L1\text{-}RSRP,\ report}$ is delay of acquiring CSI reporting resources.

$T_{uncertainty_MAC}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{uncertainty_RRC}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{uncertainty_SP}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

T_{RRC_delay} is the RRC procedure delay as specified in TS38.331 [13].

Longer delays for RRM measurement requirements, and in case of FR2-2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

When *absoluteFrequencySSB* is not configured in *DownlinkConfigCommon* for target SCell but SMTC for target SCell is configured, no requirement would be applied.

$T_{CSI_reporting_withCCA} = T_{CSI_reporting} + T_{CSI_ReportingDelay}$, where

$T_{CSI_reporting}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13].

$T_{CSI_ReportingDelay}$ is the additional delay in transmission of CSI reporting due to UL CCA failures at the UE. If there are no uplink resources for reporting the valid CSI, then the UE shall use the next available opportunities for reporting the corresponding valid CSI as specified in TS 38.213 [8].

Upon exceeding any of the maximum numbers $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$ of SMTC occasions or CSI-RS occasions, respectively, not available at the UE, the UE shall abandon the SCell activation procedure.

SCell operating with CCA in FR1 is known if it has been meeting the following conditions:

- During the period equal to max(5 measCycleSCell, 5 DRX cycles) before the reception of the SCell activation command:
  - the UE has sent a valid measurement report for the SCell being activated and
  - the SSB measured remains detectable in the SMTC occasions available at the UE, according to the cell identification conditions specified in 38.133 [6] clause 9.2A and 9.3A.
- the SSB measured during the period equal to max(5 measCycleSCell, 5 DRX cycles) also remains detectable - the SSB measured during the period equal to max(5 measCycleSCell, 5 DRX cycles) also remains detectable in the SMTC occasions available at the UE during the SCell activation delay according to the cell identification conditions specified in 38.133 [6] clause 9.2A and 9.3A.

Otherwise SCell operating with CCA in FR1 is unknown.

For the first SCell activation with CCA in FR2-2 bands, the SCell is known if it has been meeting the following conditions:

- During the period equal to 4s for UE supporting power class 1/5 and 3s for UE supporting power class 2/3/4 before UE receives the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable):
  - the UE has sent a valid L3-RSRP measurement report with SSB index
  - SCell activation command is received after L3-RSRP reporting and no later than the time when UE receives MAC-CE command for TCI activation
- During the period from L3-RSRP reporting to the valid CQI reporting, the reported SSBs with indexes remain detectable according to the cell identification conditions specified in 38.133 [6] clauses 9.2 and 9.3, and the TCI state is selected based on one of the latest reported SSB indexes.

Otherwise, the first SCell with CCA in FR2-2 band is unknown. The requirement for unknown SCell applies provided that the activation commands for PDCCH TCI, PDSCH TCI (when applicable), semi-persistent CSI-RS for CQI reporting (when applicable), and configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) are based on the latest valid L1-RSRP reporting.

If the UE has been provided with higher layer in TS 38.331 [13] signalling of *smtc2* prior to the activation command, T_{SMTC_Scell} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. T_{SMTC_MAX} follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.331 [13] for a SCell at the first opportunities for the corresponding actions once the SCell is activated.

For intra-band CA, the starting point of an interruption window on SpCell or any activated SCell as specified 38.133 [6] in clause 8.2, shall not occur before slot n+1+ $\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot n+1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$, where T_X is:

- $T_{FirstSSB}$, for known SCell activation when SCell measurement cycle is equal to or smaller than 160ms;
- $T_{FirstSSB_MAX}$ + $L_{2,1}$* T_{SMTC_MAX} for known SCell activation when SCell measurement cycle is greater than 160ms;
- $T_{FirstSSB_MAX}$ + $L_{3,1}$* T_{SMTC_MAX} for unknown SCell activation

For inter-band CA, the starting point of an interruption window on SpCell or any activated SCell as specified in 38.133 [6] clause 8.2, shall not occur before slot n+1+ $\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot n+1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$, where T_X is:

- $T_{FirstSSB}$, for known SCell activation when SCell measurement cycle is equal to, or smaller than, 160ms.

For intra-band CA,

- While the SCell being activated is known with measurement cycle equal to or smaller than 160ms, no more than one interruption is allowed during SCell activation.
- While the SCell being activated is known with measurement cycle greater than 160ms, up to $1+L_{2,1}$ interruptions are allowed during SCell activation,
- While the SCell being activated is unknown, up to $1+L_{3,1}$ interruptions are allowed during SCell activation. When $L_{3,1}>0$, performance degradation may be expected on any activated intra-band victim cells during the SCell activation
- For a single interruption (L=0), interruption window length at SCell activation does not depend on DL CCA failures.

For inter-band CA,

- For any active cell in the same band with the SCell being activated, the interruption requirements (i.e. number of interruptions and starting point of an interruption) for intra-band CA apply.
- For any active cell outside the band with the SCell being activated, a single interruption applies

The number of interruptions and length of each interruption window may be different for different victim cells and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell. For a single interruption (L=0), the interruption window length at SCell activation does not depend on DL CCA failures.

Starting from slot *n* + T_{HARQ} + 3 ms where slot *n* is the slot where SCell activation command is received (as specified in clause 4.3 of TS 38.213 [8]) and until the SCell activation completion at UE, after at least one CSI-RS transmission occasion for the channel measurement and reporting (specified in clause 5.2.2.5 of TS 38.214 [9]), the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [8] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

The requirements in this section do not apply when *sCellDeactivationTimer* [13] is not configured and when $T_{activation_time_withCCA}$ exceeds 1280 ms.

The normative reference for this requirement is TS 38.133 [6] clause 8.3A.

10.3.3.0.2 SCell Deactivation Delay Requirement for Activated SCell under CCA

The requirements in this clause shall apply for the UE configured with one downlink SCell operating with CCA in EN-DC or in standalone NR carrier aggregation.

Upon receiving SCell deactivation command in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot *n*+(T_{HARQ} +3ms)/*NR_slot_length*. The starting point of an interruption window on spCell or any activated SCell, as specified in 38.133 [6] clause 8.2, shall not occur before slot n+1+$\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot n+1+$\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.

Upon expiry of the *sCellDeactivationTimer* in slot *n*, the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot *n* + $\frac{3ms}{NR\ slot\ length}$. The starting point of an interruption window on spCell or any activated SCell, as specified in 38.133 [6] clause 8.2, shall not occur before slot n+1 and not occur after slot n+1+ $\frac{3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.The

length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

The requirements in this section do not apply when *sCellDeactivationTimer* [13] is not configured and when SCell deactivation delay exceeds 1280 ms.

The normative reference for this requirement is TS 38.133 [6] clause 8.3A.

10.3.3.1 EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle

10.3.3.1.1 Test purpose

The purpose of this test is to verify that the SCell activation and deactivation delays for NR SCell, with NR PSCell and NR SCell both under CCA, are within the requirements, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 160 ms.

10.3.3.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and 2DL CA in NR.

10.3.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 10.3.3.0.1 and 10.3.3.0.2 for SCell Activation Delay Requirement for Deactivated SCell under CCA and SCell Deactivation Delay Requirement for Activated SCell under CCA correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.3.1.

10.3.3.1.4 Test description

10.3.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations for LTE PCell and NR PSCell and SCell are shown in Table 10.3.3.1.4.1-1.

This test shall be tested using any of the test configurations in Table 10.3.3.1.4.1-1.

Table 10.3.3.1.4.1-1: Supported test configurations for EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle

Configuration	Description
10.3.3.1-1	PCC: LTE FDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.3.3.1-2	PCC: LTE TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.3.3.1.4.1-2.

Table 10.3.3.1.4.1-2: Initial conditions for EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 10.3.3.1.4.1-1	
Propagation conditions	AWGN	As specified in clause C.2.2.

Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

Table 10.3.3.1.4.1-3: General test parameters for EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	Three radio channels (1, 2, 3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1.
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
SCell measurement cycle (measCycleSCell)	ms	160	
Cell 3 timing offset to Cell 2	µs	0	
Time alignment error between Cell 3 and Cell 2	µs	≤ TAE as specified in TS 38.104 [28] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time PCell and PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [8] depends on UE's capability
$T_{CSI_Reporting}$	ms	$10 + 5 \cdot 2^{\mu_{DL}}$	The delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214 [9]) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [13] μ_{DL} is the subcarrier spacing configuration for DL

1. Message contents are defined in clause 10.3.3.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR FR1 cells with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the PSCell and Cell 3 is the deactivated SCell.

10.3.3.1.4.2 Test procedure

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, each with one cell: Cell 1 (PCell) on radio channel 1 (PCC) in E-UTRA, Cell 2 (PSCell) on radio channel 2 (PSCC) in NR, and Cell3 (SCell) on radio channel 3 (SCC) in NR. Before the test starts the UE is connected to Cell 1 and Cell 2, but is not aware of Cell 3, as the UE is only monitoring PCC and PSCC. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

The point in time at which UE receives an RRC message by which the SCell (Cell 3) becomes configured on radio channel 2 defines the start of time period T1. During T1, UE starts monitoring the SCC. At the end of T1, the test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted *m*, defines the start of time period T2. The UE shall be able to report a valid CSI in PSCell for the activated SCell at latest in slot m + (T_{HARQ}+ $T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, as defined in TS 38.133 [6] clause 8.3A.2. The UE shall start reporting CSI in PSCell in first available uplink resource for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting following slot $m+\frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption shall fall within the time window specified in TS 38.133 [6] clause 8.3A.2.

Time period T3 starts when the MAC message is received by at the UE antenna connector, in a slot # denoted *n*, The UE shall complete the deactivation at latest in slot $n+\frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\text{NR slot length}}$. Any PSCell interruption shall fall within the time window specified in TS 38.133 [6] clause 8.3A.3.

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 10.3.3.1.5**-**1 and A.6B.1.1. Propagation conditions are set according to Annex C clauses C.2.2. The SS shall enable DL and UL CCA model according to Table 10.3.3.1.5-1.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 10.3.3.1.4.3. NR RRCReconfiguration message is contained in *RRCConnectionReconfiguration* and NR RRCReconfigurationComplete message is contained in *RRCConnectionReconfigurationComplete*.

3a. The UE send a *MeasurementReport* message embedded in *ULInformationTransferMRDC*. If the TE doesn't receive the MeasurementReport during T1, go to step 9.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m and T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot s_{first_CSI} = m + 1 + $\frac{\mathrm{T_{HARQ}}+3\mathrm{ms}+T_{CSI_Reporting_withCCA}}{NR\ slot\ length}$,

     - or slot $s^{int}_{first_CSI} = m + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting_withCCA}+T_X}{NR\ slot\ length}$ +if the slot s_{first_CSI} was subject to interruption,

     - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI}$ = m + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time_withCCA}}+T_{\mathrm{CSI_Reporting_withCCA}}}{\text{NR slot length}}$,

     - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

     - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if $s_{nonzero_CQI}$ was subject to interruption,

   - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length}$up to the end of T2

- Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 9.

7. When T2 expires, the SS deactivate SCC by sending the deactivation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n and T3 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 8, otherwise go to step 9.

8. The UE shall stop sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PSCell during SCell deactivation.

   - If the last CSI report is received by the SS earlier than or equal to slot n + $\frac{\mathrm{T_{HARQ}}+3ms}{NR\ slot\ length}$

   - and DTX is not observed by the SS outside the slot n + 1 + $\frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$ up to the end of T3,

   - Then the number of successes for the event "Deactivation" is increased by one. Otherwise, count a fail for the event "Deactivation".

9. When T3 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event "Activation" in step 6, or Deactivation in step 7 was not acknowledged, the SS shall transmit an RRCConnectionReconfiguration message with condition EN-DC_PSCell_Rel according to TS 36.508[25] Table 4.6.1-8 to release NR PSCell. The UE shall transmit an RRCConnectionReconfigurationComplete message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

10. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

11. The SS shall transmit an RRCConnectionReconfiguration message with condition MCG and SCG according to TS 36.508 [25] Table 4.6.1-8 to ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5. The UE shall transmit an RRCConnectionReconfigurationComplete message.

12. Repeat steps 2-11 until a test verdict has been achieved.

Each of the events "Activation" and "Deactivation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Annex G.2.7 is achieved. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

10.3.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 10.3.3.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 10.3.3.1.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_MEAS and EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			

secondaryCellGroup	CellGroupConfig-SCell	Table 10.3.3.1.4.3-5	
measConfig	MeasConfig	Table 10.3.3.1.4.3-2A	
}			
}			
}			

Table 10.3.3.1.4.3-2A: MeasConfig (Table 10.3.3.1.4.3-2)

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 10.3.3.1.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 10.3.3.1.4.3-4	
}			
}			
}			
}			

Table 10.3.3.1.4.3-3: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 10.3.3.1.4.3-4: ReportConfigNR

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			

}			

Table 10.3.3.1.4.3-5: CellGroupConfig-SCell (Table 10.3.3.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 10.3.3.1.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 10.3.3.1.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 10.3.3.1.4.3-6: ServingCellConfig-SpCell (Table 10.3.3.1.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 10.3.3.1.4.3-7: ServingCellConfig-SCell (Table 10.3.3.1.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

10.3.3.1.5 Test requirements

Table 10.3.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 10.3.3.1.5-1: Cell specific test parameters for EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1,2		TDD			TDD		
TDD configuration	Config 1,2		TDDConf.1.1 CCA			TDDConf.1.1 CCA		

$BW_{channel}$	Config 1,2	MHz	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
DL CCA model			As specified in clause D.7.2.1	As specified in clause D.7.2.1
UL CCA model			As specified in clause D.7.2.2	As specified in clause D.7.2.2
DL CCA probability for semi-static channel access Note5,7	P_{CCA_DL}		0.9375	0.9375
DL CCA probability for dynamic channel access Note6,7	$P_{CCA_DL_1}$		0.75	0.75
	$P_{CCA_DL_2}$		0.75	0.75
UL CCA probability for semi-static channel access	P_{CCA_UL}		0.87	0.87
UL CCA probability for dynamic channel access	P_{CCA_UL}		0.75	0.75
L_{CCA_DL} Note 8			2	2
W_{CCA_DL} Note 8			$T_{activation_time_withCCA}$	$T_{activation_time_withCCA}$
Initial downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Initial uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
Dedicated downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Dedicated uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
TCI state			TCI.State.0	TCI.State.0
TRS Configuration	Config 1,2		TRS.1.2 TDD	TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA	SR.1.1 CCA
Dedicated CORESET parameters	Config 1,2		CCR.1.3 CCA	CCR.1.3 CCA
RMSI CORESET parameters	Config 1,2		CR.1.1 CCA	CR.1.1 CCA
OCNG Patterns Note1			OP.1	OP.1
SSB Configuration for semi-static channel access Note5,7	Config 1,2		SSB.1 CCA	SSB.1 CCA
SSB Configuration for dynamic channel access Note6,7	Config 1,2		SSB.2 CCA	SSB.2 CCA
SMTC configuration			SMTC.1	SMTC.1
DBT window configuration			DBT.1	DBT.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	Config 1,2	dBm/15kHz	-104	-104
N_{oc} Note2	Config 1,2	dBm/SCS	-101	-101
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-84	-84
Io Note3	Config 1,2	dBm/ 38.16MHz	-52.87	-52.87
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that resources in the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8:	As specified in TS 38.133 [6] clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [8] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+ $T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA} = T_{FirstSSB} + L_1*T_{rs}$ + 5ms, as specified in TS 38.133 [6] clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] clause 8.3A.3.

During T2, interruption on PSCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB}$.

During T3, interruption on PSCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PSCell shall not be more than specified for EN-DC in TS 38.133 [6] clause 8.2.1.2.4.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

10.3.3.2 EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle

10.3.3.2.1 Test purpose

The purpose of this test is to verify that the SCell activation and deactivation delays for NR SCell, with NR PSCell and NR SCell both under CCA, are within the requirements, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 640 ms.

10.3.3.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and supporting 2DL CA in NR.

10.3.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 10.3.3.0.1 and 10.3.3.0.2 for SCell Activation Delay Requirement for Deactivated SCell under CCA and SCell Deactivation Delay Requirement for Activated SCell under CCA correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.3.2.

10.3.3.2.4 Test description

10.3.3.2.4.1 Initial conditions

Same initial conditions as described in section 10.3.3.1.4.1 with following exception:

- The listed parameter values in Tables 10.3.3.2.4.1-3 will replace the values of corresponding parameters in Tables 10.3.3.1.4.1-3.

Table 10.3.3.2.4.1-3: General test parameters for EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

10.3.3.2.4.2 Test procedure

Same test procedure as described in section 10.3.3.1.4.2.

10.3.3.2.4.3 Message contents

Same message contents as described in section 10.3.3.1.4.3 with following exception:

- Table 10.3.3.1.4.3-3 is replaced by Table 10.3.3.2.4.3-1.

Table 10.3.3.2.4.3-1: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf640		
}			

10.3.3.2.5 Test requirements

Table 10.3.3.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 10.3.3.2.5-1: Cell specific test parameters for EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1,2		TDD			TDD		
TDD configuration	Config 1,2		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
$BW_{channel}$	Config 1,2	MHz	40: $N_{RB,c}$ = 106			40: $N_{RB,c}$ = 106		
DL CCA model			As specified in clause D.7.2.1			As specified in clause D.7.2.1		
UL CCA model			As specified in clause D.7.2.2			As specified in clause D.7.2.2		
DL CCA probability for semi-static channel access Note5,7	P_{CCA_DL}		0.9375			0.9375		
DL CCA probability for dynamic channel access Note6,7	$P_{CCA_DL_1}$		0.75			0.75		
	$P_{CCA_DL_2}$		0.75			0.75		
UL CCA probability for semi-static channel access	P_{CCA_UL}		0.87			0.87		
UL CCA probability for dynamic channel access	P_{CCA_UL}		0.75			0.75		
L_{CCA_DL} Note 8			2			2		
W_{CCA_DL} Note 8			$T_{activation_time_withCCA}$			$T_{activation_time_withCCA}$		
Initial downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Initial uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
Dedicated downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Dedicated uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
TCI state			TCI.State.0			TCI.State.0		
TRS Configuration	Config 1,2		TRS.1.2 TDD			TRS.1.2 TDD		

PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA	SR.1.1 CCA
Dedicated CORESET parameters	Config 1,2		CCR.1.3 CCA	CCR.1.3 CCA
RMSI CORESET parameters	Config 1,2		CR.1.1 CCA	CR.1.1 CCA
OCNG Patterns Note1			OP.1	OP.1
SSB Configuration for semi-static channel access Note5,7	Config 1,2		SSB.1 CCA	SSB.1 CCA
SSB Configuration for dynamic channel access Note6,7	Config 1,2		SSB.2 CCA	SSB.2 CCA
SMTC configuration			SMTC.1	SMTC.1
DBT window configuration			DBT.1	DBT.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	Config 1,2	dBm/15kHz	-104	-104
N_{oc} Note2	Config 1,2	dBm/SCS	-101	-101
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-84	-84
Io Note3	Config 1,2	dBm/ 38.16MHz	-52.87	-52.87
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that resources in the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8: As specified in 38.133 [6] clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [8] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+ $T_{activation_time_withCCA}$ + $T_{CSI_reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA} = T_{FirstSSB_MAX} + L_{2,1}*T_{SMTC_MAX} + (1 + L_{2,2})*T_{rs}$ + 5ms, as specified in TS 38.133 [6] clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] clause 8.3A.3.

During T2, interruption on PSCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB_MAX} + L_{2,1}* T_{SMTC_MAX}$.

During T3, interruption on PSCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PSCell shall not be more than specified for EN-DC in TS 38.133 [6] clause 8.2.1.2.4.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

10.3.3.3 EN-DC FR1 SCell Activation and Deactivation of unknown NR SCell with NR PSCell and NR SCell under CCA

10.3.3.3.1 Test purpose

The purpose of this test is to verify that the SCell activation and deactivation delays for NR SCell, with NR PSCell and NR SCell both under CCA, are within the requirements, when the when the SCell is unknown to the UE at the time of activation.

10.3.3.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and supporting 2DL CA in NR.

10.3.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 10.3.3.0.1 and 10.3.3.0.2 for SCell Activation Delay Requirement for Deactivated SCell under CCA and SCell Deactivation Delay Requirement for Activated SCell under CCA correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.3.3.

10.3.3.3.4 Test description

10.3.3.3.4.1 Initial conditions

Same initial conditions as described in section 10.3.3.1.4.1 with following exception:

- The listed parameter values in Tables 10.3.3.3.4.1-3 will replace the values of corresponding parameters in Tables 10.3.3.1.4.1-3.

Table 10.3.3.3.4.1-3: General test parameters for EN-DC FR1 SCell Activation and Deactivation of unknown NR SCell with NR PSCell and NR SCell under CCA

Parameter	Unit	Value	Comment
T1	s	0.1	During this time period PCell and PSCell shall be known and the SCell configured, but not detected.

10.3.3.3.4.2 Test procedure

Same test procedure as described in section 10.3.3.1.4.2, except step 3 and step 5 are replaced by following steps:

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 10.3.3.3.4.3. NR RRCReconfiguration message is contained in RRCConnectionReconfiguration and NR RRCReconfigurationComplete message is contained in RRCConnectionReconfigurationComplete. The SCell (Cell 3) shall be powered OFF till T2 starts.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m, power ON the SCell (Cell3), T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

and:

- Step 3a is removed.

10.3.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 10.3.3.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 10.3.3.3.4.3-2: *RRCReconfiguration* in step 3: SCell addition

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 10.3.3.3.4.3-3	
}			
}			
}			

Table 10.3.3.3.4.3-3: CellGroupConfig (Table 10.3.3.3.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR SpCell		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 10.3.3.3.4.3-4	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 10.3.3.3.4.3-5	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 10.3.3.3.4.3-4: ServingCellConfig-SpCell (Table 4.5.3.3.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 10.3.3.3.4.3-5: ServingCellConfig-SCell (Table 10.3.3.3.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

10.3.3.3.5 Test requirements

Table 10.3.3.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 10.3.3.3.5-1: Cell specific test parameters for EN-DC FR1 SCell Activation and Deactivation of unknown NR SCell with NR PSCell and NR SCell under CCA

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1,2		TDD			TDD		
TDD configuration	Config 1,2		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
$BW_{channel}$	Config 1,2	MHz	40: $N_{RB,c}$ = 106			40: $N_{RB,c}$ = 106		
DL CCA model			As specified in clause D.7.2.1			As specified in clause D.7.2.1		
UL CCA model			As specified in clause D.7.2.2			As specified in clause D.7.2.2		
DL CCA probability for semi-static channel access Note5,7	P_{CCA_DL}		0.9375			0.9375		
DL CCA probability for dynamic channel access Note6,7	$P_{CCA_DL_1}$		0.75			0.75		
	$P_{CCA_DL_2}$		0.75			0.75		
UL CCA probability for semi-static channel access	P_{CCA_UL}		0.87			0.87		
UL CCA probability for dynamic channel access	P_{CCA_UL}		0.75			0.75		
L_{CCA_DL} Note 8			2			2		
W_{CCA_DL} Note 8			$T_{activation_time_withCCA}$			$T_{activation_time_withCCA}$		
Initial downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Initial uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
Dedicated downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Dedicated uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
TCI state			TCI.State.0			TCI.State.0		
TRS Configuration	Config 1,2		TRS.1.2 TDD			TRS.1.2 TDD		
PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA			SR.1.1 CCA		
Dedicated CORESET parameters	Config 1,2		CCR.1.3 CCA			CCR.1.3 CCA		
RMSI CORESET parameters	Config 1,2		CR.1.1 CCA			CR.1.1 CCA		
OCNG Patterns Note1			OP.1			OP.1		
SSB Configuration for semi-static channel access Note5,7	Config 1,2		SSB.1 CCA			SSB.1 CCA		
SSB Configuration for dynamic channel access Note6,7	Config 1,2		SSB.2 CCA			SSB.2 CCA		
SMTC configuration			SMTC.1			SMTC.1		
DBT window configuration			DBT.1			DBT.1		
EPRE ratio of PSS to SSS		dB	0			0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								

EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS Note1 EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	Config 1,2	dBm/15kHz	-104	-104
N_{oc} Note2	Config 1,2	dBm/SCS	-101	-101
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-84	-84
Io Note3	Config 1,2	dBm/ 38.16MHz	-52.87	-52.87
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that resources in the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8: As specified in 38.133 [6] clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [8] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+ $T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA} = T_{FirstSSB_MAX} + (1 + L_{3,1})*T_{SMTC_MAX} + (2 + L_{3,2})*T_{rs}$ + 5ms, as specified in TS 38.133 [6] clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] clause 8.3A.3.

During T2, interruption on PSCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB_MAX} + L_{3,1}* T_{SMTC_MAX}$.

During T3, interruption on PSCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PSCell shall not be more than specified for EN-DC in TS 38.133 [6] clause 8.2.1.2.4.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

10.3.4 Beam failure detection and link recovery procedures

10.3.4.0 General

The requirements for link recovery procedure in the clause apply when CCA is used on a serving frequency on the downlink.

The UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set $\bar{q}_0$ as specified in TS 38.213 [8] in order to detect beam failure on:

- PCell in SA operation mode,

- PSCell in EN-DC operation mode.
- PSCell in NR-DC operation mode.

The RS resource configurations in the set $\bar{q}_0$ can be periodic SSBs. UE is not required to perform beam failure detection outside the active DL BWP. UE is not required to meet the requirements in clause 10.3.4.0.1 and 10.3.4.0.2 if UE does not have set $\bar{q}_0$.

On each RS resource configuration in the set $\bar{q}_0$, the UE shall estimate the radio link quality and compare it to the threshold $Q_{out_LR,CCA}$ for the purpose of accessing downlink radio link quality of the serving cell beams.

The threshold $Q_{out_LR,CCA}$ is defined as the level at which the downlink radio level link of a given resource configuration on set $\bar{q}_0$ cannot be reliably received and shall correspond to the $BLER_{out,CCA}$ = 10% block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{out_LR_SSB,CCA}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 10.3.4.0.1-1.

Upon request the UE shall deliver configuration indexes from the set $\bar{q}_1$ as specified in TS 38.213 [8] , to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold $Q_{in_LR,CCA}$, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the $Q_{in_LR,CCA}$ threshold to the L1-RSRP measurement obtained from an SSB. The RS resource configurations in the set $\bar{q}_1$ can be periodic SSBs. UE is not required to perform candidate beam detection outside the active DL BWP.

In the requirements of this clause, the term CBD-RS SSB occasions not available at the UE refers to when the CBD-RS SSB is configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the set of configured CBD-RS resources are not available at the UE due to DL CCA failures at gNB during the corresponding evaluation period; otherwise the CBD-RS SSB is considered as available at the UE.

The requirements in this clause apply for any *channelAccessMode* configuration [TS 38.331, 13].

The normative reference for this requirement is TS 38.133 [6] clause 8.5A.1.

10.3.4.0.1 Minimum conformance requirements for SSB based Beam Failure Detection under CCA

The requirements in this clause apply for each SSB resource in the set $\bar{q}_0$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 10.3.4.0.1, but occasionally may not be transmitted due to CCA operation.

Table 10.3.4.0.1-1: PDCCH transmission parameters for beam failure instance under CCA

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

The normative reference for this requirement is TS 38.133 [6] clause 8.5A.2.

10.3.4.0.1.1 Minimum requirement for SSB based Beam Failure Detection under CCA

UE shall be able to evaluate whether the downlink radio link quality on the configured BFD-RS SSB resource in set $\bar{q}_0$ estimated over the last $T_{Evaluate_BFD_SSB_CCA}$ ms period becomes worse than the threshold $Q_{out_LR_SSB,CCA}$ within $T_{Evaluate_BFD_SSB_CCA}$ ms period.

The value of $T_{Evaluate_BFD_SSB_CCA}$ is defined in Table 10.3.4.0.1.1-1 for FR1.

When concurrent gaps are configured,

- P value for a BFD-RS resource to be measured is defined as N_{total} / $N_{outside_MG}$
- For a window W of duration max(T_{L1}, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap and per-FR measurement gap within the same FR as serving cell, and starting at the beginning of any BFD-RS resource occasion:
  - N_{total} is the total number of BFD-RS resource occasions within the window, including those overlapped with measurement gap occasions within the window, and
  - $N_{outside_MG}$ is the number of BFD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,
  - $P = \frac{1}{1-\frac{T_{SSB}}{xGP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the BFD-RS SSB.
  - P=1 when in the monitored cell there are no GAPs overlapping with any occasion of the BFD-RS SSB.
- When a measurement gap is configured and the measurement gap is not NCSG,
  - a BFD-RS resource is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
  - xRP = MGRP
- Otherwise, when NCSG measurement gap is configured,
  - a BFD-RS resource is considered to be overlapped with the GAP if it overlaps the VIL1 or VIL2 of NCSG, and
  - xRP = VIRP
- When concurrent gaps are configured, a BFD-RS is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to 38.133 [6] section 9.1.8.

Longer evaluation period would be expected if the combination of BFD-RS SSB resource, SMTC occasion and GAP configurations does not meet pervious conditions.

Table 10.3.4.0.1-1: Evaluation period $T_{Evaluate_BFD_SSB_CCA}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB_CCA}$ (ms)	
	BFD-RS SSB Es/Iot Note2 ≥ -7 dB	BFD-RS SSB Es/Iot Note2 < -7 dB
no DRX	Max(50, Ceil((10 × P) × T_{SSB}))	Max(50, Ceil((12 × P) × T_{SSB}))
DRX cycle ≤ 320ms	Max(50, Ceil(1.5 × 8 × P) × Max(T_{DRX},T_{SSB}))	Max(50, Ceil(1.5 × 10 × P) × Max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	Ceil(7 × P) × T_{DRX}	Ceil(8 × P) × T_{DRX}
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.		
Note 2: BFD-RS SSB Es/Iot is the averaged BFD-RS SSB Es/Iot over the most recent previous evaluation period.		

The normative reference for this requirement is TS 38.133 [6] clause 8.5A.2.2.

10.3.4.0.1.2 Measurement restriction for SSB based Beam Failure Detection under CCA

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure SSB for BFD measurement.

The normative reference for this requirement is TS 38.133 [6] clause 8.5A.2.3.

10.3.4.0.2 Void

10.3.4.0.3 Scheduling availability of UE during beam failure detection under CCA

10.3.4.0.3.1 Scheduling availability of UE performing beam failure detection under CCA with a same subcarrier spacing as PDSCH/PDCCH

In this clause, the same requirements apply as in Clause 4.5.5.0.3.

The normative reference for this requirement is TS 38.133 [6] clause 8.5A.7.1.

10.3.4.0.4 Scheduling availability of UE during candidate beam detection under CCA

10.3.4.0.4.1 Scheduling availability of UE performing L1-RSRP measurement under CCA with a same subcarrier spacing as PDSCH/PDCCH on FR1

In this clause, the same requirements apply as in Clause 4.5.5.0.3.

The normative reference for this requirement is TS 38.133 [6] clause 8.5A.8.1.

10.3.4.1 EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

10.3.4.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 10.3.4.0.1.

10.3.4.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and supporting UL and SSB-based RLM and link recovery on shared channel access.

10.3.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.3.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.4.1.

10.3.4.1.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 10.3.4.1.4-1 shows the variation of the downlink SNR of the PSCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure 10.3.4.1.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

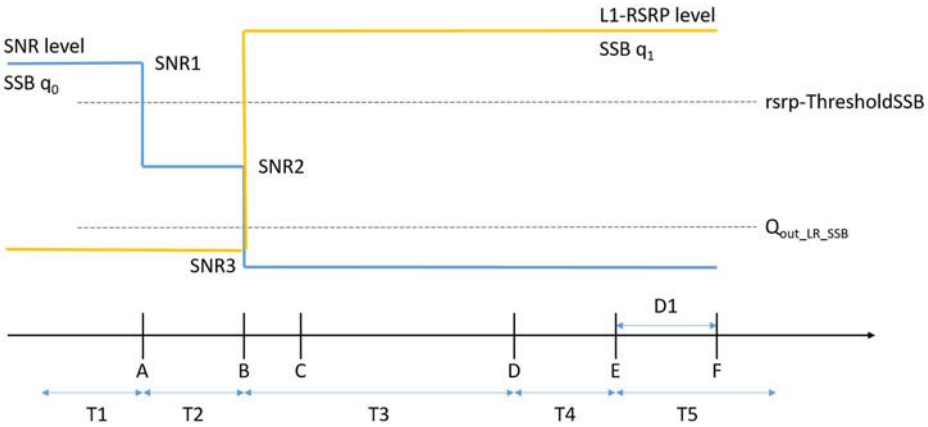

Figure 10.3.4.1.4-1: SNR and L1-RSRP variation for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

10.3.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.3.4.1.4.1-1.

Table 10.3.4.1.4.1-1: Supported test configurations for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

Configuration	Description
10.3.4.1-1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.3.4.1-2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 10.3.4.1.4.1-2.

Table 10.3.4.1.4.1-2: Initial conditions for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.3.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.3.4.1.4.1-3.
2. Message contents are defined in clause 10.3.4.1.4.3.

3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 10.3.4.1.4.1-3: General test parameters for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
DL CCA model			As specified in D.7.2.1	
UL CCA model			As specified in D.7.2.2	
Duplex mode	Config 1, 2		TDD	
BWchannel	Config 1, 2	MHz	40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1	
TDD configuration	Config 1, 2		TDDConf.1.1 CCA	
CORESET Reference Channel	Config 1, 2		CR.1.1 CCA	
SSB Configuration	Config 1, 2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access	
DBT Window Configuration	Config 1, 2		DBT.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		30 KHz	
PRACH Configuration	Config 1, 2		Table A.7.1A.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	

		Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
		Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
		DMRS precoder granularity		REG bundle size	
		REG bundle size		6	
DRX				OFF	
Gap pattern ID				gp0	
gapOffset				0	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0. (38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2		dBm/SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer				pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting	Config 1, 2			CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1, 2			TRS.1.2 TDD	
SSB Index assigned as RLM RS				0,1	
T310 timer			ms	1000	
N310				2	
T1			s	0.2	During this time the UE shall be fully synchronized to cell 1
T2			s	0.93	
T3			s	0.52	
T4			s	0	
T5			s	0.45	
D1			s	0.41	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.					

10.3.4.1.4.2 Test procedure

There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA model. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40 ms) in test 1. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS sends an *RRCReconfiguration* (embedded in *RRCConnectionReconfiguration* message) message to the UE to configure inter-frequency measurement with the corresponding gap pattern.

3. The UE sends an RRCReconfigurationComplete (embedded in RRCConnectionReconfigurationComplete message) message.

4. Set the parameters of NR Cell according to T1 in Table 10.3.4.1.5-1. Propagation conditions are set according to clause C.2.3. The SS shall enable DL and UL CCA model according to Table 10.3.4.1.5-1. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 10.3.4.1.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 10.3.4.1.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 10.3.4.1.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 10.3.4.1.5-1. T5 starts.

9. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according to CSI reporting on PUCCH), provided that such slot is not subject to CCA failure (as determined by P_{CCA_UL} in Table 10.3.4.1.5-1), during the period from time point A to time point B; and

   b) does not detect preamble on a beam associated with the candidate beam set q_1 before time point B; and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5), the number of successful tests is increased by one.

   Otherwise, the number of failed tests is increased by one.

10. The SS shall first attempt to release and add the PSCell, by disabling the CCA model (i.e. PCCA_DL_i= PCCA_UL=1) and then proceeding with step 1. Otherwise, the UE is switched OFF/ON, then proceed with step 1.

11. Repeat steps 2-10 for all subtests until the confidence level according to Annex G clause G.2.7 is achieved.

10.3.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.3.4.1.4.3-1: Common Exception messages for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition BFD Table H.3.5-4 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 10.3.4.1.4.3-2: PDCCH *Search Space* for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 10.3.4.1.4.3-3: *RLF-TimersAndConstants* for EN-D FR1 C Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 10.3.4.1.4.3-4: *PDCCH-Config* for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 10.3.4.1.4.3-5: *ControlResourceSet* for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15

Information Element	Value/remark	Comment	Condition
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

10.3.4.1.5 Test requirements

Tables 10.3.4.1.4.1-3 and 10.3.4.1.5-1 define the primary level settings including test tolerances for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

Table 10.3.4.1.5-1: Cell specific test parameters for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability $P_{CCA,DL}$	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability $P_{CCA,UL}$			1.0	1.0	1.0	1.0	1.0
L_{CCA_DL}			N/A	7			
W_{CCA_DL}		ms	N/A	$T_{Evaluate_CBD_SSB_CCA}$ Note 13			
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1, 2	dB	5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q_1	Config 1, 2	dB	-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_1	Config 1, 2	dBm/SCS kHz	-105.2	-105.2	-84.8	-84.8	-84.8
N_{oc}	Config 1, 2	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT window.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 10.3.4.1.4-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4A.
Note 10:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 11:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 12:	For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.
Note 13:	As defined in 38.133 [6] Table 8.5A.5.2-1.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1, provided that such slots are not subject to CCA failure.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1, provided that such slots are not subject to CCA failure.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 410 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

10.3.4.2 EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode

10.3.4.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 10.3.4.0.1.

10.3.4.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier, and supporting UL and SSB-based RLM and link recovery on shared channel access.

10.3.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.3.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.4.2.

10.3.4.2.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 10.3.4.2.4-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure 10.3.4.2.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

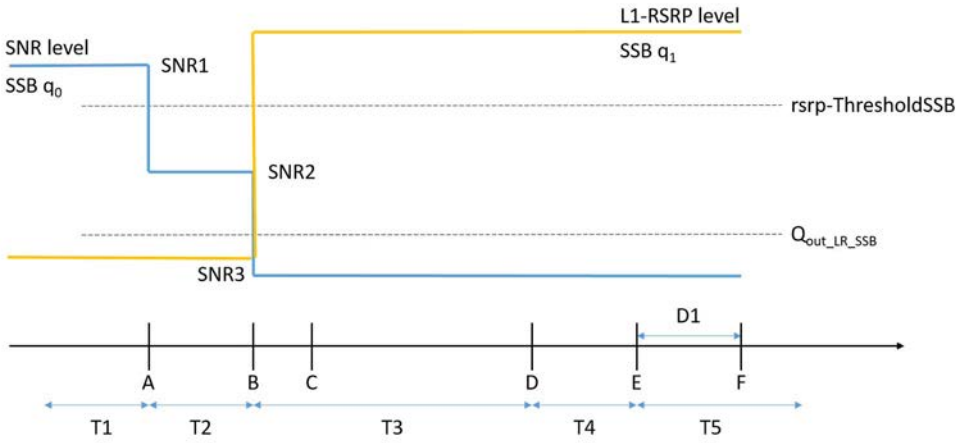

Figure 10.3.4.2.4-1: SNR and L1-RSRP variation for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode

10.3.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.3.4.2.4.1-1.

Table 10.3.4.2.4.1-1: Supported test configurations for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode

Configuration	Description
10.3.4.2-1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.3.4.2-2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 10.3.4.2.4.1-2.

Table 10.3.4.2.4.1-2: Initial conditions for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.3.4.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.3.4.2.4.1-3.
2. Message contents are defined in clause 10.3.4.2.4.3.

3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 10.3.4.2.4.1-3: General test parameters for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
DL CCA model			As specified in D.7.2.1	
UL CCA model			As specified in D.7.2.2	
Duplex mode	Config 1, 2		TDD	
BWchannel	Config 1, 2	MHz	40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1	
TDD configuration	Config 1, 2		TDDConf.1.1 CCA	
CORESET Reference Channel	Config 1, 2		CR.1.1 CCA	
SSB Configuration	Config 1, 2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access	
DBT Window Configuration	Config 1, 2		DBT.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		30 KHz	
PRACH Configuration	Config 1, 2		Table A.7.1A.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to	dB	0	

	average SSS RE energy			
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	Table A.5-1
Gap pattern ID			N.A.	
gapOffset			N.A.	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1, 2		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	9.01	
T3		s	5.16	
T4		s	0	
T5		s	3.89	
D1		s	3.85	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: E-UTRAN is in non-DRX mode under test.				

10.3.4.2.4.2 Test procedure

There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA model. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. No inter-frequency gap is configured on the UE. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of NR Cell according to T1 in Table 10.3.4.2.5-1. Propagation conditions are set according to clause C.2.3. The SS shall enable DL and UL CCA model according to Table 10.3.4.2.5-1. T1 starts.

3. When T1 expires the SS shall change the SNR value to T2 as specified in Table 10.3.4.2.5-1. T2 starts.

4. When T2 expires the SS shall change the SNR value to T3 as specified in Table 10.3.4.2.5-1. T3 starts.

5. When T3 expires the SS shall change the SNR value to T4 as specified in Table 10.3.4.2.5-1. T4 starts.

6. When T4 expires the SS shall change the SNR value to T5 as specified in Table 10.3.4.2.5-1. T5 starts.

7. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according to CSI reporting on PUCCH), provided that such slot is not subject to CCA failure (as determined by P_{CCA_UL} in Table 10.3.4.2.5-1), during the period from time point A to time point B; and

   b) does not detect preamble on a beam associated with the candidate beam set q_1 before time point B; and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5), the number of successful tests is increased by one.

   Otherwise, the number of failed tests is increased by one.

8. The SS shall first attempt to release and add the PSCell, by disabling the CCA model (i.e. PCCA_DL_i= PCCA_UL=1) and then proceeding with step 1. Otherwise, the UE is switched OFF/ON, then proceed with step 1.

9. Repeat steps 2-8 for all subtests until the confidence level according to Annex G clause G.2.7 is achieved.

10.3.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.3.4.2.4.3-1: Common Exception messages for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.4-5 with Condition BFD Table H.3.5-4 Table H.3.7-1 with Condition DRX.7 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 10.3.4.2.4.3-2: PDCCH *Search Space* for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 10.3.4.2.4.3-3: *RLF-TimersAndConstants* for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 10.3.4.2.4.3-4: *PDCCH-Config* for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 10.3.4.2.4.3-5: *ControlResourceSet* for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		

shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

10.3.4.2.5 Test requirements

Tables 10.3.4.2.4.1-3 and 10.3.4.2.5-1 define the primary level settings including test tolerances for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode.

Table 10.3.4.2.5-1: Cell specific test parameters for EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability $P_{CCA,DL}$	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability $P_{CCA,UL}$			1.0	1.0	1.0	1.0	1.0
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1, 2	dB	5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q_1	Config 1, 2	dB	-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_1	Config 1, 2	dBm/SCS kHz	-105.2	-105.2	-84.8	-84.8	-84.8
N_{oc}	Config 1, 2	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT window.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 10.3.4.2.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4A.
Note 10: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 11: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 12: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1, provided that such slots are not subject to CCA failure.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1, provided that such slots are not subject to CCA failure.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 3850 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

10.3.5 Active BWP switching

10.3.5.1 EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA

10.3.5.1.1 Test purpose

The purpose of this test is to verify the UL BWP switch delay requirement defined in 38.133 [6] clause 8.6.4.

10.3.5.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 onwards, supporting EN-DC, RRM measurements and UL with a shared spectrum NR carrier, BWP adaptation of at least 2BWPs, DCI and timer-based active BWP switching delay Type1 or Type2 on shared channel access, and UL LBT detection and recovery.

10.3.5.1.3 Minimum conformance requirements

Upon detection of consistent UL CCA failure is slot#n in SpCell when UE detects *lbt-FailureInstanceMaxCount* number of CCA failure within *lbt-FailureDetectionTimer*, the UE shall switch the active UL BWP to an UL BWP configured with PRACH occasion and for which consistent CCA failure has not been triggered as defined in TS 38.321 [12] clause 5.21. The UE shall be ready to transmit PRACH on the new UL BWP of the SpCell on the first UL slot occurs right after slot $n+T_{BWPswitchDelay}+1$, where $T_{BWPswitchDelay}$ is defined in 38.133 [6] Table 8.6.2-1. The UE shall finish the UL BWP switch within the time duration $T_{BWPswitchDelay}$ depending on UE capability *bwp-SwitchingDelay* [13].

Note: Additional delay in acquiring the first available RACH occasion will be derived in a way similar to that in handover in 38.133 [6] clause 6.1B.1.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ on the SpCell in the UL BWP switch. The UE is not required to follow the requirements defined in this clause when performing a UL BWP switch between the UL BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

The normative reference for this requirement is TS 38.133 [6] clause 8.6.4.

10.3.5.1.4 Test description

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in 10.3.5.1.4.1-3. Cell-specific parameters of E-UTRA Pcell are specified in Table A.6B-1 and Cell-specific parameters of NR PSCell is specified in Table 10.3.5.1.5-1. SRS configuration used in the test is specified in Table 10.3.5.1.5-2.

The UE shall be configured with PRACH configuration on UL BWP on which the UE shall switch after the consistent UL LBT failure detection.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1 and Cell 2 on radio channel 2.

- UE is configured with 2 different UE-specific downlink and uplink bandwidth parts on Cell 2: DL BWP-1, DL BWP-2, UL BWP-1 and UL BWP-2 before starting the test. DL BWP-1 and DL BWP-2 always include bandwidth of the initial DL BWP and SSB. UL BWP-1 and UL BWP-2 always include bandwidth of the SRS.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is DL BWP-1.
- UE is indicated in *firstActiveUplinkBWP-Id* that the active UL BWP is UL BWP-1.
- UE is configured with *LBT-FailureRecoveryConfig* parameters for Cell 2.

The cell has constant signal levels throughout the test. The test consists of 2 successive time periods, with durations of T1 and T2, respectively.

During T1,

- Time period T1 starts when the UE has received the SRS configuration for periodic SRS transmission on active UL BWP-1.
- The UE shall perform UL CCA before SRS transmission.
- The parameter UL CCA probability P_{CCA} is set to 0 during T1. This requires the test system to set energy level above the detection level during portion of the UL slot where the UE performs UL CCA. This in turn forces the UE to fail the UL CCA. The UE consistently fails UL CCA during T1 and is therefore unable to transmit SRS.

During T2,

- T2 starts when the UE detects consistent UL LBT failures i.e. when total number of UL LBT failures in Cell 2 on active UL BWP-1 exceeds *lbt-FailureInstanceMaxCount* during *lbt-FailureDetectionTimer.*
- The UE upon detected consistent UL LBT failure starts the LBT recovery mechanism, which requires the UE to switch to active UL BWP-2 in Cell 2 and to send PRACH in the active UL BWP-2.
- Staring from T2, the UE shall be able to send PRACH in the active UL BWP-2 within the delay specified in 38.133 [6] clause 8.6.4.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

10.3.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.3.5.1.4.1-1.

Table 10.3.5.1.4.1-1: Supported test configurations for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Config	Description
10.3.5.1-1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.3.5.1-2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 10.3.5.1.4.1-2.

Table 10.3.5.1.4.1-2: Initial conditions for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 10.3.5.1.4.1-1.	

Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable Ues without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 10.3.5.1.4.1-3.

2. Message contents are defined in clause 10.3.5.1.4.3.

3. The test scenario comprises of one E-UTRA Pcell (Cell 1), and one NR PSCell (Cell 2) with CCA transmitting SSBs in DBT windows according to DL CCA model. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is configured according to clause C.1.2 and C.1.3.

Table 10.3.5.1.4.1-3: General test parameters for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active Pcell		Cell 1	Pcell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
lbt-FailureDetectionTimer	ms	80	Parameter configured by IE: *LBT-FailureRecoveryConfig* [13]
lbt-FailureInstanceMaxCount		4	Parameter configured by IE: *LBT-FailureRecoveryConfig* [13]
T1	s	0.1	During T1 consistent LBT failure is detected on active UL BWP-1
T2	s	0.1	During T2 UE sends PRACH on active UL BWP-2

10.3.5.1.4.2 Test procedure

All cells have constant signal levels throughout the test. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 10.3.5.1.4.1-3 and 10.3.5.1-5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures 2 different UE-specific bandwidth parts, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, and as the active UL BWP using *firstActiveUplinkBWP-Id* according to Table 10.3.5.1.4.3-2. UE is configured with *LBT-FailureRecoverConfig* parameters for Cell 2 according to Table 10.3.5.1.4.3-5, PRACH configuration on UL BWP-2 according to Table 10.3.5.1.4.3-4 and periodic SRS transmissions on UL BWP-1 according to Tables 10.3.5.1.4.3-4 and 10.3.5.1.5-2.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.3.5.1.5-1. T1 starts.

5. During T1 the UE shall perform UL CCA before each SRS transmission. The parameter UL CCA probability P_{CCA} is set to 0 during T1. This requires the test system to set energy level above the detection level during portion of the UL slot where the UE performs UL CCA. This in turn forces the UE to fail the UL CCA. The UE consistently fails UL CCA during T1 and is therefore unable to transmit SRS.

6. When T1 expires T2 starts. The SS shall change the UL CCA probability P_{CCA} to 1 during T2. This will make the SS to not occupy the channel anymore.

7. The UE shall attempt to recover the link by transmitting PRACH on UL BWP-2. If the UE transmits PRACH on UL BWP-2 within 21.5ms from the start of T2 (for UE capable of *bwp-SwitchingDelay type1*) or within 23ms from the start of T2 (for UE capable of *bwp-SwitchingDelay type2*), then the number of successful tests is increased by one. If the UE does not transmit PRACH on UL BWP-2 during the required time, the number of failures is increased by one.

8. The SS shall first attempt to release and add the PSCell, by disabling the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1) and then ensuring the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode On according to TS 38.508-1 [6] clause 4.5, then proceed with step 2. Otherwise, the UE is switched OFF/ON, then proceed with step 1.

9. Repeat steps 2-8 for until the confidence level according to Annex G clause G.2.7 is achieved.

10.3.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.3.5.1.4.3-1: Common Exception messages for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 10.3.5.1.4.3-1A: *RRCReconfiguration* (Step3) for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 10.3.5.1.4.3-1B	
}			
}			
}			

Table 10.3.5.1.4.3-1B: *CellGroupConfig* (Table 10.3.5.1.4.3-1A) for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PSCell		
spCellConfigDedicated	ServingCellConfig	Table 10.3.5.1.4.3-2	
}			
}			

Table 10.3.5.1.4.3-2: *ServingCellConfig* (Table 10.3.5.1.4.3-1B) for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 10.3.5.1.4.3-3	BWP1
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 10.3.5.1.4.3-3	BWP2
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 10.3.5.1.4.3-4	BWP1
BWP-Uplink[2]	BWP-Uplink with condition BWP2	entry 2 Table 10.3.5.1.4.3-4	BWP2
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 10.3.5.1.4.3-3: *BWP-Downlink* (Table 10.3.5.1.4.3-2) for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
}			

}			

Table 10.3.5.1.4.3-4: *BWP-Uplink* (Table 10.3.5.1.4.3-2) for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3	BWP-2	BWP2
rach-ConfigCommon CHOICE {			
setup	RACH-ConfigCommon	Table A.7.1A.1-1	BWP2
}			
}			
bwp-Dedicated SEQUENCE {			
srs-Config CHOICE {			BWP1
setup	SRS-Config	Table 10.3.5.1.5-2	
}			
lbt-FailureRecoveryConfig-r16 CHOICE {			BWP2
setup	LBT-FailureRecoveryConfig-r16	Table 10.3.5.1.4.3-5	
}			
}			
}			

Table 10.3.5.1.4.3-5: *LBT-FailureRecoveryConfig* for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Derivation Path: TS 38.508-1 [14], Table 4.6.3-64A			
Information Element	**Value/remark**	**Comment**	**Condition**
LBT-FailureRecoveryConfig-r16 ::= SEQUENCE {			
lbt-FailureInstanceMaxCount-r16	n4		
lbt-FailureDetectionTimer-r16	ms80		
}			

10.3.5.1.5 Test requirements

Tables 10.3.5.1.5-1 and 10.3.5.1.5-2 define the primary level settings including test tolerances for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC.

Table 10.3.5.1.5-1: NR Cell specific test parameters for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Parameter		**Unit**	**Cell 2**	
			T1	**T2**
TDD configuration	Config 1, 2		TDDConf.1.1 CCA	
$BW_{channel}$	Config 1, 2		40 MHz: $N_{RB,c}$ = 106	
DL CCA model	Config 1, 2		As specified in clause D.7.2.1	
UL CCA model	Config 1, 2		As specified in clause D.7.2.2	
Active BWP ID	Config 1, 2		1, 2	
Initial DL BWP Configuration	Config 1, 2		DLBWP.0.2 Note 4	
Active DL BWP-1 Configuration	Config 1, 2		DLBWP.1.1 Note 4	
Active DL BWP-2 Configuration	Config 1, 2		DLBWP.1.3 Note 4	
Initial UL BWP Configuration	Config 1, 2		ULBWP.0.2 Note 4	
Active UL BWP-1 Configuration	Config 1, 2		ULBWP.1.1 Note 4	
Active UL BWP-2 Configuration	Config 1, 2		ULBWP.1.3 Note 4	
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 CCA	

RMSI CORESET parameters		Config 1, 2		CR.1.1 CCA	
Dedicated CORESET parameters		Config 1, 2		CCR.1.1 CCA	
OCNG Patterns		Config 1, 2		OP.1	
SSB Configuration	Semi- static channel access	Config 1, 2		SSB.1 CCA	
	Dynamic channel access	Config 1, 2		SSB.2 CCA	
SMTC Configuration		Config 1, 2		SMTC.1 FR1	
Correlation Matrix and Antenna Configuration		Config 1, 2		1x2 Low	
TRS Configuration		Config 1, 2		TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1, 2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1, 2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1, 2		1	1
UL CCA probability (P_{CCA_UL})		Config 1, 2		0	1
PRACH configuration		Config 1, 2		N/A	Table A.7.1A.1-1
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 2		Config 1, 2	dBm/SCS	-101	
SS-RSRP Note 3		Config 1, 2	dBm/SCS	-84	
$\hat{E}_s/I_{ot}$		Config 1, 2	dB	17	
$\hat{E}_s/N_{oc}$		Config 1, 2	dB	17	
Io Note3		Config 1, 2	dBm/ 38.16MHz	-52.86	
Propagation Condition				AWGN	

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].

Note 5: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in section D.7.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 10.3.5.1.5-2: Sounding Reference Symbol Configuration for EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

Field	Value	Comment
c-SRS	24	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4 for SCS 30kHz	Once every 5 slots

pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [13].		

The UE capable of *bwp-SwitchingDelay type1* [13] shall start to transmit the PRACH on active UL BWP-2 of Cell 2 (PSCell) less than 21.5 ms from the beginning of time period T1.

The UE capable of *bwp-SwitchingDelay type2* [13] shall start to transmit the PRACH on active UL BWP-2 of Cell 2 (PSCell) less than 23 ms from the beginning of time period T1.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The above delay is calculated as follows:'

The active UL BWP switch delay from UL BWP-1 to UL BWP-2 can be expressed as:

$$T_{BWPswitchDelay} * T_{slot} + 1 * T_{slot} + (1 + L_3) * T_{SSB,RO} + 10 \text{ ms}$$

Where:

- $T_{BWPswitchDelay}$ = 1 ms (2 slots) and 2.5 ms (5 slots) for *bwp-SwitchingDelay* [13] *type1* and *type2* UE capabilities according to 38.133 [6] clause 8.6.4.
- T_{slot} = It is the slot length. It is 0.5 ms for 30 kHz.
- L3 = It is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. L3= 0 during T2 since P_{CCA} = 1.
- $T_{SSB,RO}$ = 10 ms according to FR1 PRACH configuration 1.

This gives a total of 21.5 ms and 23 ms for *type1* and *type2* UE respectively.

10.3.5.2 DCI-based and Timer-based Active BWP Switch

10.3.5.2.0 Minimum conformance requirements

10.3.5.2.0.1 Minimum conformance requirements for DCI-based and timer-based active BWP switch

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ + Y which starts from the beginning of DL slot n. Where,

- Y=0, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.
- Y equals to the length of 1 slot, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. In this scenario, $T_{BWPswitchDelay}$ + Y shall follow the smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change. If both scheduling cell and scheduled cell are in FR2-2, Y shall follow the SCS of 120 KHz.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause

when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (FR1) or DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [13] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* [13] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 10.3.5.2.0.1-1.

Table 10.3.5.2.0.1-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5
2	0.25	3	9
3	0.125	6	18
5	0.03125	20	65
6	0.015625	39	129
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in 38.133 [6] Clause 8.10 in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in 38.133 [6] Clause 8.10 in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

If the BWP switch is triggered within or outside DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321, 12], UE shall be able to complete active BWP switching within the time duration of

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is receiveds, or
- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where
- $T_{BWPswitchDelay}$ is defined in Table 10.3.5.2.0.1-1 corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs;
- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after

switching the BWP of the serving cell where BWP switching occurs. If both scheduling cell and scheduled cell are in FR2-2, X shall follow the SCS of 120 KHz.

- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where UE receives dormancy indication.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this clause apply for each BWP switch.

When UE receives a DCI indicating UE to switch its active BWP involving changes in any of the parameters listed in Table 10.3.5.2.0.1-3, the UE is allowed to cause interruption of up to X slot to other active serving cells if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 10.3.5.2.0.1-3 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 10.3.5.2.0.1-2. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in 38.133 [6] clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ +Y as defined in 38.133 [6] clause 8.6.2A.1 when BWP switch occurs on multiple CCs. Interruptions are not allowed during BWP switch involving any other parameter change.

When a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [13] expires, UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 10.3.5.2.0.1-3 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 10.3.5.2.0.1-3 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 10.3.5.2.0.1-2. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in 38.133 [6] clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ as defined in 38.133 [6] clause 8.6.2B.1 when BWP switch occurs on multiple CCs simultaneously or $T_{MultipleBWPswitchDelayTotal}$ as defined in 38.133 [6] clause 8.6.2B.2 when BWP switch occurs on multiple CCs over partially overlapping time period. Interruptions are not allowed during BWP switch involving any other parameter change.

When UE receives an RRC reconfiguration that only requests UE to switch its active BWP on one single CC, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 10.3.5.2.0.1-3 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 10.3.5.2.0.1-3 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 10.3.5.2.0.1-2. The interruption is only allowed within the delay $T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$ defined in 38.133 [6] clause 8.6.3 when BWP switch occurs on a single CC. The interruption is only allowed within the delay $T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$ + D_{RRC}*(N-1) as defined in 38.133 [6] clause 8.6.3A when BWP switch occurs on multiple CCs.

When UL BWP switch is triggered by consistent uplink CCA failures [12], the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active UL BWP involving changes in any of the parameters listed in Table 10.3.5.2.0.1-3 if the UE is not capable of per-FR gap, or if the UL BWP switching involves SCS changing. When the UL BWP switch imposes changes in any of the parameters listed in Table 10.3.5.2.0.1-3 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing UL BWP switching. X is defined in Table 10.3.5.2.0.1-2. The starting time of interruption is only allowed within the UL BWP switching delay $T_{BWPswitchDelay}$ as defined in 38.133 [6] clause 8.6.2. Interruptions are not allowed during UL BWP switch involving other parameter change.

Table 10.3.5.2.0.1-2: interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5
Note1: void		

Table 10.3.5.2.0.1-3: Parameters which cause interruption other than SCS

Parameters	Comment
locationAndBandwidth	From TS 38.331 [13]
nrofSRS-Ports	
maxMIMO-Layers-r16	

DCI-based or timer-based downlink BWP and/or uplink BWP switching due to change in any of the parameters listed in Table 8.2.1.2.7-2 of TS 38.133 [6] or SCS in NR PSCell or in any NR SCell may cause an interruption on PCell or on activated SCell(s) in the MCG. Interruptions are not allowed during BWP switch involving other parameter change.

Uplink BWP switching on a NR PSCell triggered by consistent uplink LBT failures on the NR PSCell may cause an interruption on PCell or on activated SCell(s) in the MCG.

The starting time of interruption due to DCI-based or timer-based downlink BWP and/or uplink BWP switching or due to uplink BWP switching on a NR PSCell triggered by consistent uplink LBT failures on the NR PSCell is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in clause 8.6.2 of TS 38.133 [6].

The normative reference for this requirement is TS 38.133 [6] clauses 8.6.2, 8.2.1.2.7 and TS 36.133 [23] clause 7.32.2.7.

10.3.5.2.1 EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

10.3.5.2.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS 38.133 [6] clause 8.6 with NR PSCell under CCA, and interruption requirement for E-UTRA victim cell defined in TS 36.133 [23] clause 7.32.2.7.

10.3.5.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 onwards, supporting EN-DC, RRM measurements and UL with a shared spectrum NR carrier, BWP adaptation of at least 2BWPs, DCI and timer-based active BWP switching delay Type1 or Type2 on shared channel access.

10.3.5.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.3.5.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.5.2.1.

10.3.5.2.1.4 Test description

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and PSCell (Cell 2) with CCA transmitting SSBs in DBT windows according to DL CCA model: PSCell (Cell 2). The test parameters for the two cells are given in Table 10.3.5.2.1.4.1-1 and 10.3.5.2.1.4.1-3 below.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

10.3.5.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.3.5.2.1.4.1-1.

Table 10.3.5.2.1.4.1-1: Supported test configurations for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Config	Description

10.3.5.2.1-1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.3.5.2.1-2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: A UE which fulfils the requirements in test case 10.3.5.2.2 can skip the test cases in 10.3.5.2.1. Note 3: The UE supporting EN-DC with only NR band(s) with shared spectrum access is required to be tested.	

Configure the test equipment and the DUT according to the parameters in Table 10.3.5.2.1.4.1-2.

Table 10.3.5.2.1.4.1-2: Initial conditions for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.3.5.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 10.3.5.2.1.4.1-3.
2. Message contents are defined in clause 10.3.5.2.1.4.3.
3. The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) with CCA transmitting SSBs in DBT windows according to DL CCA model. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is configured according to clause C.1.2 and C.1.3.
4. By step 4 of the test procedure:
   - UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
   - UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
   - UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

Table 10.3.5.2.1.4.1-3: General test parameters for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
DL CCA model		As specified in clause D.7.2.1	
UL CCA model		As specified in clause D.7.2.2	
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.

Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

10.3.5.2.1.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

The SS verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or bwp-InactivityTimer timer expires till an ACK/NACK is received.

The SS verifies that potential interruption to E-UTRA PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of PSCell, respectively.

"k" is the length (slot) between E-UTRA PCell PDSCH and its corresponding ACK/NACK as specified in TS 36.213 [33].

All cells have constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 10.3.5.2.1.4.1-3 and 10.3.5.2.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures 2 different UE-specific bandwidth parts, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to Table 10.3.5.2.1.4.3-2. UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.3.5.2.1.5-1.

5. The SS shall send a DCI format 1_1 command for PSCell DL BWP switch.

6. The UE shall receive the DCI format 1_1 command in PSCell's slot # denoted i, then T1 starts and the UE switch its bandwidth part from BWP-1 to BWP-2:

   a) If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of the DL slot (i+$T_{BWPswitchDelay}$+k_1); and

   b) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot (i+$T_{BWPswitchDelay}$+ 1 subframe + k); and

   c) If the number of consecutive missing ACK/NACK for PCell is no more than 1.

   Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

7. If the UE sends valid ACK/NACK for the PSCell on BWP-2, T2 starts. During T2, the SS shall not transmit DCI format for PDSCH reception on PSCell.

8. T3 starts from the first slot #j of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires and the SS restarts to send DCI format for PDSCH reception on PSCell. Then, the UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part - BWP-1 on PSCell:

   a) If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of the DL slot (j+$T_{BWPswitchDelay}$+k_1); and

   b) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot (j+$T_{BWPswitchDelay}$+ 1 subframe + k); and

   c) If the number of consecutive missing ACK/NACK for PCell is no more than 1

   Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).

9. Repeat steps 5-8 until the confidence level according to Annex G clause G.2.7 is achieved. If all subtests pass, the test passes. If one subtest fails, the test fails.

10.3.5.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.3.5.2.1.4.3-1: Common Exception messages for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 10.3.5.2.1.4.3-1A: *RRCReconfiguration* (Step3) for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 10.3.5.2.1.4.3-1B	
}			
}			
}			

Table 10.3.5.2.1.4.3-1B: *CellGroupConfig* (Table 10.3.5.2.1.4.3-1A) for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PSCell		
spCellConfigDedicated	ServingCellConfig	Table 10.3.5.2.1.4.3-2	
}			
}			

Table 10.3.5.2.1.4.3-2: *ServingCellConfig* (Table 10.3.5.2.1.4.3-1B) for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 10.3.5.2.1.4.3-3	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 10.3.5.2.1.4.3-3	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 10.3.5.2.1.4.3-4	
BWP-Uplink[2]	BWP-Uplink with condition BWP2	entry 2 Table 10.3.5.2.1.4.3-4	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 10.3.5.2.1.4.3-3: *BWP-Downlink* (Table 10.3.5.2.1.4.3-2) for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2

bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 10.3.5.2.1.4.3-6	
}			
}			
}			

Table 10.3.5.2.1.4.3-4: *BWP-Uplink* (Table 10.3.5.2.1.4.3-2) for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3	BWP-2	BWP2
}			
}			

Table 10.3.5.2.1.4.3-5: *PDSCH-TimeDomainResourceAllocationList* (Table 10.3.5.2.1.4.3-6) for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	$T_{BWPswitchDelay}$	Defined in Table 10.3.5.2.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 10.3.5.2.1.4.3-6: *PDSCH-ConfigCommon* (Table 10.3.5.2.1.4.3-3) for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 10.3.5.2.1.4.3-5	
}			

10.3.5.2.1.5 Test requirements

Tables 10.3.5.2.1.4.1-3 and 10.3.5.2.1.5-1 define the primary level settings including test tolerances for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA.

Table 10.3.5.2.1.5-1: NR Cell specific test parameters for EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Parameter			**Unit**	**Cell 2**
Frequency Range				FR1
Duplex mode		Config 1,2		TDD
TDD configuration		Config 1,2		TDDConf.1.1 CCA
$BW_{channel}$		Config 1,2		40 MHz: $N_{RB,c}$ = 106
Active BWP ID				1, 2
Initial DL BWP Configuration		Config 1,2		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration		Config 1,2		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration		Config 1,2		DLBWP.1.3 Note 4
Initial UL BWP Configuration		Config 1,2		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration		Config 1,2		ULBWP.1.1 Note 4
Active UL BWP-2 Configuration		Config 1,2		ULBWP.1.3 Note 4
PDSCH Reference measurement channel		Config 1,2		SR.1.1 CCA
RMSI CORESET parameters		Config 1,2		CR.1.1 CCA
Dedicated CORESET parameters		Config 1,2		CCR.1.1 CCA
OCNG Patterns		Config 1,2		OP.1
SSB Configuration	Semi- static channel access	Config 1,2		SSB.1 CCA
	Dynamic channel access	Config 1,2		SSB.2 CCA
SMTC Configuration		Config 1,2		SMTC.1
TRS Configuration		Config 1,2		TRS.1.2 TDD
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1,2		1
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1
Correlation Matrix and Antenna Configuration				1x2 Low
EPRE ratio of PSS to SSS				
EPRE ratio of PBCH DMRS to SSS				

EPRE ratio of PBCH to PBCH DMRS		dB	0
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS (Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-101
SS-RSRP Note 3	Config 1,2	dBm/SCS	-84
$\hat{E}_s/I_{ot}$	Config 1,2	dB	17
$\hat{E}_s/N_{oc}$	Config 1,2	dB	17
Io Note3	Config 1,2	dBm/38.16MHz	-59
Propagation Condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Note 5: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause D.7.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in 38.214 [9].

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in TS 38.133 [6] Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PCell interruption during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PCell interruption of during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS 36.133 [23] Clause 7.32.2.7.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

k1 is the timing between DL data receiving and acknowledgement as specified in [12].

10.3.5.2.2 EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

10.3.5.2.2.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS 38.133 [6] clause 8.6 with NR PSCell and SCell under CCA, and interruption requirements for NR victim cell defined in TS 38.133 [6] clause 8.2.1.2.7 and interruption requirement for E-UTRA victim cell defined in clause 7.32.2.7 of TS 36.133 [23].

10.3.5.2.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 onwards, supporting EN-DC, RRM measurements and UL with a shared spectrum NR carrier, BWP adaptation of at least 2BWPs, DCI and timer-based active BWP switching delay Type1 or Type2 and 2DL CA on shared channel access.

10.3.5.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.3.5.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.5.2.2.

10.3.5.2.2.4 Test description

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and PSCell (Cell 2) on one NR carrier and NR SCell (Cell 3) on the other NR carrier with CCA transmitting SSBs in DBT windows according to DL CCA model. The test parameters for the three cells are given in Table 10.3.5.2.2.4.1-1 and 10.3.5.2.2.4.1-3 below.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

10.3.5.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. Supported test configurations for LTE PCell and NR PSCell are shown in Table 10.3.5.2.2.4.1-1. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

Table 10.3.5.2.2.4.1-1: Supported test configurations for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

Config	Description
10.3.5.2.2-1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.3.5.2.2-2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations Note 2: A UE which fulfils the requirements in test case 10.3.5.2.2 can skip the test cases in 10.3.5.2.1. Note 3: NR configuration is the same for PSCell and SCells. Note 4: The UE supporting EN-DC with only NR band(s) with shared spectrum access is required to be tested.	

Configure the test equipment and the DUT according to the parameters in Table 10.3.5.2.2.4.1-2.

Table 10.3.5.2.2.4.1-2: Initial conditions for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.3.5.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.	

1. The general test parameter settings are set up according to Table 10.3.5.2.2.4.1-3.
2. Message contents are defined in clause 10.3.5.2.2.4.3.
3. There are one E-UTRAN carrier and two NR carriers and three cells specified in the test. Cell 1 is the PCell on E-UTRAN carrier, Cell 2 is the PSCell on one NR carrier and Cell 3 is the NR SCell on the other NR carrier. Cell 1 is the cell used for connection setup with the power level set according to Annex A.6B. Cell 2 and Cell 3 are configured according to clauses C.1.2 and C.1.3.

4. By step 4 of the test procedure:

   - UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
   - UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 3 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
   - UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0 in Cell 2 before starting the test.
   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.
   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PSCell.
   - UE is configured with a *bwp-InactivityTimer* timer value for SCell.

Table 10.3.5.2.2.4.1-3: General test parameters for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	
DL CCA model		As specified in clause D.7.2.1	
UL CCA model		As specified in clause D.7.2.2	
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
Cell3 timing offset to cell2	µs	3	Synchronous cells
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

10.3.5.2.2.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) and PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 3 and the time duration of T2.

The SS verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The SS verifies that potential interruption to E-UTRA PCell and NR PSCell is carried out in the correct time span by monitoring ACK/NACK sent in E-UTRA PCell and PSCell during BWP switch of SCell, respectively.

Interruption length is defined in TS 38.133 [6] Table 8.2.1.2.7-1.

k is the length (slot) between E-UTRA PCell PDSCH and its corresponding ACK/NACK as specified in TS 36.213 [33].

k_1 is the timing between NR DL data receiving and acknowledgement as specified in TS 38.214 [9].

All cells have constant signal levels throughout the test:

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall configure SCell (Cell 3) on the SCC as per TS 38.508-1 [14] clause 7.5.1. Set the parameters according to Tables 10.3.5.2.2.4.1-3 and 10.3.5.2.2.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP* of Cell 3. This message also configures 2 different UE-specific bandwidth parts for Cell 3, BWP-1 and BWP-2,which always include the bandwidth of the initial DL BWP and SSB. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id* in SCell, and BWP-0 as the active DL BWP using *firstActiveDownlinkBWP-Id* in PSCell, according to Table 10.3.5.2.2.4.3-2. UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.3.5.2.2.5-1.

5. The SS shall send a DCI format 1_1 command for SCell DL BWP switch.

6. The UE shall receive the DCI format 1_1 command in SCell's slot # denoted i, then T1 starts and the UE switch its bandwidth part from BWP-1 to BWP-2:

   a) If the UE starts to report valid ACK/NACK for SCell on PSCell from the first UL slot that occurs after the beginning of the DL slot ($i+T_{BWPswitchDelay}+k_1$); and

   b) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot ($i+T_{BWPswitchDelay}$+ 1 subframe + k); and

   c) If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}$+ Interruption length + k_1); and

   d) If the number of consecutive missing ACK/NACK for PCell is no more than 1; and

   e) If the number of consecutive missing ACK/NACK for PSCell is no more than 1.

   Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

7. If the UE sends valid ACK/NACK for the SCell on PSCell on BWP-2, T2 starts. During T2, the SS shall not transmit DCI format for PDSCH reception on SCell.

8. T3 starts from the first slot #j of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires and the SS restarts to send DCI format for PDSCH reception on SCell. Then, the UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part, BWP-1, on SCell:

   a) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot ($j+T_{BWPswitchDelay}$+ 1 subframe + k); and

   b) If the UE starts to report valid ACK/NACK for SCell on PSCell from the first UL slot that occurs after the beginning of the DL slot ($j+T_{BWPswitchDelay}+k_1$); and

c) If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of DL slot (i+$T_{BWPswitchDelay}$+ Interruption length + k_1); and

d) If the number of consecutive missing ACK/NACK for PCell is no more than 1; and

e) If the number of consecutive missing ACK/NACK for PSCell is no more than 1.Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).

9. Repeat steps 5-8 until the confidence level according to Annex G clause G.2.7 is achieved. If all subtests pass, the test passes. If one subtest fails, the test fails.

10.3.5.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.3.5.2.2.4.3-1: Common Exception messages for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access.

Table 10.3.5.2.2.4.3-1A: *RRCReconfiguration* (Step 3) for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC_SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 10.3.5.2.2.4.3-1B	
}			
}			
}			

Table 10.3.5.2.2.4.3-1B: *CellGroupConfig* (Table 10.3.5.2.2.4.3-1A) for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig	Table 10.3.5.2.2.4.3-2	
}			
}			
}			

Table 10.3.5.2.2.4.3-2: *ServingCellConfig* (Table 10.3.5.2.2.4.3-1B) for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**

ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 10.3.5.2.2.4.3-3	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 10.3.5.2.2.4.3-3	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
}			

Table 10.3.5.2.2.4.3-3: *BWP-Downlink* (Table 10.3.5.2.2.4.3-2) for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 10.3.5.2.2.4.3-5	
}			
}			
}			

Table 10.3.5.2.2.4.3-4: *PDSCH-TimeDomainResourceAllocationList* (Table 10.3.5.2.2.4.3-5) for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	

}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	$T_{BWPswitchDelay}$	Defined in Table 10.3.5.2.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 10.3.5.2.2.4.3-5: *PDSCH-ConfigCommon* (Table 10.3.5.2.2.4.3-3) for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 10.3.5.2.2.4.3-4	
}			

10.3.5.2.2.5 Test requirements

Tables 10.3.5.2.2.4.1-3 and 10.3.5.2.2.5-1 define the primary level settings including test tolerances for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA.

Table 10.3.5.2.2.5-1: NR Cell specific test parameters for EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC under CCA

Parameter			Unit	Cell 2	Cell 3
Frequency Range				FR1	
Duplex mode		Config 1,2		TDD	
TDD configuration		Config 1,2		TDDConf.1.1 CCA	
$BW_{channel}$		Config 1,2		40 MHz: $N_{RB,c}$ = 106	
Active BWP ID				1, 2	0
Initial BWP Configuration		Config 1,2		DLBWP.0.2	DLBWP.0.2
Active BWP-0 Configuration		Config 1,2		NA	DLBWP.0.2
Active BWP-1 Configuration		Config 1,2		DLBWP.1.3	NA
Active BWP-2 Configuration		Config 1,2		DLBWP.1.1	NA
PDSCH Reference measurement channel		Config 1,2		SR.1.1 CCA	
RMSI CORESET parameters		Config 1,2		CR.1.1 CCA	
Dedicated CORESET parameters		Config 1,2		CCR.1.1 CCA	
OCNG Patterns		Config 1,2		OP.1	
SSB Configuration	Semi- static channel access	Config 1,2		SSB.1 CCA	

Dynamic channel access		Config 1,2		SSB.2 CCA	
SMTC Configuration		Config 1,2		SMTC.1	
TRS Configuration		Config 1,2		TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1,2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1,2		1	1
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1	1
Correlation Matrix and Antenna Configuration				1x2	
Propagation Condition				AWGN	
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note 2		Config 1,2	dBm/SCS kHz	-101	-101
SS-RSRP Note 3		Config 1,2	dBm/SCS kHz	-84	-84
$\hat{E}_s/I_{ot}$		Config 1,2	dB	17	17
$\hat{E}_s/N_{oc}$		Config 1,2	dB	17	17
Io Note3		Config 1,2	dBm/38.16MHz	-59	-59

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause D.7.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after slot ($j+T_{BWPswitchDelay}+k11$).

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 7.32.2.7 of TS 36.133 [15].

During T1, the start of the interruption of SCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of SCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in TS 38.133 [6] clause 8.6.2.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK.

k1 is the timing between DL data receiving and acknowledgement as specified in [12].

10.3.5.3 RRC-based Active BWP Switch

10.3.5.3.0 Minimum conformance requirements

10.3.5.3.0.1 Minimum conformance requirements for RRC-based active BWP switch

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where:

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

NR Slot length is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [29] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [13], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

The normative reference for this requirement is TS 38.133 [6] clauses 8.6.3.

10.3.5.3.1 EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

10.3.5.3.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch under CCA defined in TS 38.133 [6] clause 8.6.3.

10.3.5.3.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 onwards supporting EN-DC, RRM measurements and UL with a shared spectrum NR carrier, BWP adaptation of at least 2BWPs on shared channel access.

10.3.5.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.3.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.5.3.1.

10.3.5.3.1.4 Test description

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and PSCell (Cell 2) with CCA transmitting SSBs in DBT windows according to DL CCA model: PSCell (Cell 2). The test parameters for the two cells are given in Table 10.3.5.3.1.4.1-1 and 10.3.5.3.1.4.1-3 below.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

10.3.5.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.3.5.3.1.4.1-1.

Table 10.3.5.3.1.4.1-1: Supported test configurations for EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Config	Description
10.3.5.3.1-1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.3.5.3.1-2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE supporting EN-DC with only NR band(s) with shared spectrum access is required to be tested.	

Configure the test equipment and the DUT according to the parameters in Table 10.3.5.3.1.4.1-2.

Table 10.3.5.3.1.4.1-2: Initial conditions for EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.3.5.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 10.3.5.3.1.4.1-3.
2. Message contents are defined in clause 10.3.5.3.1.4.3.
3. The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2). The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 are configured according to clause C.1.2 and C.1.3.

4. By step 4 of the test procedure:

   - UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).

   - UE has bandwidth part BWP-1 in its RRC-configuration for Cell 2 (PSCell).

- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell

Table 10.3.5.3.1.4.1-3: General test parameters for EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
DL CCA model		As specified in clause D.7.2.1	
UL CCA model		As specified in clause D.7.2.2	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	0.2	

10.3.5.3.1.4.2 Test procedure

The test consists of 1 time period, with duration of T1. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

The SS verifies the DL BWP switch time in PSCell by counting the slots from the time when the RRCConnectionReconfiguration message including updated BWP configuration is sent till the time when a valid ACK/NACK is received.

All cells have constant signal levels throughout the test:

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 10.3.5.3.1.4.1-3 and 10.3.5.3.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall send an *RRCConnectionReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures another UE-specific bandwidth part, BWP-1, and indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to the initial condition of Active BWP-1 in Table 10.3.5.3.1.5-1.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.3.5.3.1.5-1.

5. The SS shall send an *RRCConnectionReconfiguration* message with updated bandwidth part configuration for PSCell DL BWP switch, changing the BWP according to the final condition of Active BWP-1 in Table 10.3.5.3.1.5-1. T1 starts.

6. The UE shall receive the *RRCConnectionReconfiguration* in PSCell's slot # denoted i and reconfigure its bandwidth part with the updated bandwidth part configuration:

7 If the UE starts to report valid ACK/NACK for PSCell from the first UL slot that occurs after the beginning of DL slot $i+X+k_1$ then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one. Where,

- X = 52 for test configuration 10.3.5.3.1-1 and 10.3.5.3.1-2;

8. After the SS receives the ACK/NACK in step 5) or when T1 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

9. The SS shall transmit RRCConnectionReconfiguration message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1). If either of the reconfiguration in step 6 or step 7 fails, switch off and on the UE and go to step 1.

10. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.3.5.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.3.5.3.1.4.3-1: Common Exception messages for EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 10.3.5.3.1.4.3-1A: *RRCReconfiguration* (Step 3, Step 5) EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition EN-DC			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 10.3.5.3.1.4.3-1B	
}			
}			
}			

Table 10.3.5.3.1.4.3-1B: *CellGroupConfig* (Table 10.3.5.3.1.4.3-1A) EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PSCell		
spCellConfigDedicated	ServingCellConfig	Table 10.3.5.3.1.4.3-1C	
}			
}			

Table 10.3.5.3.1.4.3-1C: *ServingCellConfig* (Table 10.3.5.3.1.4.3-1B) EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167

Information Element	Value/remark	Comment	Condition
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1] SEQUENCE {	BWP-Downlink	entry 1 Table 10.3.5.3.1.4.3-1D	
}			
firstActiveDownlinkBWP-Id	1	BWP-1	
defaultDownlinkBWP-Id	1	BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 10.3.5.3.1.4.3-1E	
}			
firstActiveUplinkBWP-Id	1	BWP-1	
}			
}			

Table 10.3.5.3.1.4.3-1D: *BWP-Downlink* (Table 10.3.5.3.1.4.3-1C) EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 5
}			
}			

Table 10.3.5.3.1.4.3-1E: *BWP-Uplink* (Table 10.3.5.3.1.4.3-1C) EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13

Information Element	Value/remark	Comment	Condition
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 5
}			
}			

10.3.5.3.1.5 Test requirements

Tables 10.3.5.3.1.4.1-3 and 10.3.5.3.1.5-1 define the primary level settings including test tolerances for EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA.

Table 10.3.5.3.1.5-1: NR Cell specific test parameters for EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC under CCA

Parameter			Unit	Cell 2
Frequency Range				**FR1**
Duplex mode		Config 1,2		TDD
TDD configuration		Config 1,2		TDDConf.1.1 CCA
$BW_{channel}$		Config 1,2		40 MHz: $N_{RB,c}$ = 106
Active DL BWP ID				1, 2
Initial DL BWP Configuration		Config 1,2		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1,2		DLBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1,2		DLBWP.1.1
Initial UL BWP Configuration		Config 1,2		ULBWP.0.2
Active UL BWP-1 Configuration		Config 1,2		ULBWP.1.3
Active UL BWP-2 Configuration		Config 1,2		ULBWP.1.1
PDSCH Reference measurement channel		Config 1,2		SR.1.1 CCA
RMSI CORESET parameters		Config 1,2		CR.1.1 CCA
Dedicated CORESET parameters		Config 1,2		CCR.1.1 CCA
OCNG Patterns		Config 1,2		OP.1
SSB Configuration	Semi- static channel access	Config 1,2		SSB.1 CCA
	Dynamic channel access	Config 1,2		SSB.2 CCA
SMTC Configuration		Config 1,2		SMTC.1
TRS Configuration		Config 1,2		TRS.1.2 TDD
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1,2		1
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1
Antenna Configuration				1x2
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		Config 1,2	dBm/SCS kHz	-101
SS-RSRP Note 3		Config 1,2	dBm/SCS kHz	-84
$\hat{E}_s/I_{ot}$		Config 1,2	dB	17

$\hat{E}_s/N_{oc}$	Config 1,2	dB	17
Io^{Note3}	Config 1,2	dBm/38.16MHz	-59

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Note 5: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause D.7.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

During T1, the UE shall be ready for the reception of uplink grant on PSCell from the first DL slot occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$, and starts to report valid ACK/NACK for the PSCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k_1$

Where,

$T_{RRCprocessingDelay}$ = 20 ms, is the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [29];

$T_{BWPSwitchDelayRRC}$ = 6 ms, is the time used by the UE to perform BWP switch;

NR slot length = 1ms for SCS = 15kHz, and NR slot length = 0.5 ms for SCS = 30kHz.

k1 is the timing between DL data receiving and acknowledgement as specified in [12].

Which gives $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} =$

26 slots, for SCS = 15kHz,

52 slots, for SCS = 30kHz.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

10.3.6 PSCell addition and release delay

10.3.6.0 Minimum conformance requirements

10.3.6.0.1 NR PSCell Addition Delay Requirement

The requirements in this section shall apply for the UE which is configured with PCell, and may also be configured with one or more SCells.

Upon receiving NR PSCell addition in subframe *n*, the UE shall be capable to transmit PRACH preamble towards NR PSCell no later than in subframe $n + T_{config\ PSCell_withCCA}$:

Where:

$T_{config_PSCell_withCCA} = T_{RRC_delay} + T_{processing} + T_{search_withCCA} + T_{\Delta_withCCA} + T_{PSCell_DU_withCCA} + 2$ ms

T_{RRC_delay} is the RRC procedure delay as specified in TS 36.331 [29].

$T_{processing}$ is the software processing time needed by UE, including RF warm up period. $T_{processing}$ = 20 ms.

$T_{search_withCCA}$ is the time for AGC settling and PSS/SSS detection.

- If the target cell is known, then $T_{search_withCCA}$ = 0 ms. If the target cell is an unknown cell and the target cell Es/Iot ≥ -2 dB, then $T_{search_withCCA}$ = (3 + L_1)* Trs ms where L_1 is the number of SMTC occasions not available at the UE for AGC settling and PSS/SSS detection.

$T_{\Delta_withCCA}$ is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta_withCCA}$ = (1+ L_2)*Trs ms for a known or for an unknown PSCell where L_2 is the number of SMTC occasions not available at the UE for fine time tracking and acquiring full timing information.

$T_{PSCell_DU_withCCA}$ is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell:

$T_{PSCell_DU_withCCA}$ = (1+L_3)×$T_{SSB,RO}$ + 10 ms; where:

- L_3 is the consecutive number of SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failures. L_3 = 0 for Type 2C UL channel access procedure as defined in TS 37.213 [37].

- $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in the table 8.1-1 of TS 38.213 [8].

- The value of L3 is limited by *PREAMBLE_TRANSMISSION_COUNTER*, which is increased when PRACH occasion is unavailable for PRACH transmission due to UL CCA failure as specified in TS 38.321 [12]. The UE behaviour when *PREAMBLE_TRANSMISSION_COUNTER* reaches the *preambleTransMax* is specified in TS 38.321 [12].

Trs is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise Trs is the SMTC configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing. If UE is not provided SMTC configuration or measurement object on this frequency: the requirement in this clause is applied with Trs =5 ms assuming the SSB transmission periodicity is 5ms, and there is no requirement if the SSB transmission periodicity is not 5 ms.

NOTE 1: The PSCell addition delay including the potential extensions caused by L_1, L_2 and L_3 is limited by the T304 timer TS 38.331 [13].

The NR PSCell operating with CCA is known if it has been meeting the following conditions:

During the last 5 seconds before the reception of the NR PSCell configuration command:

- the UE has sent a valid measurement report for the NR PSCell being configured and

- One of the SSBs measured from the NR PSCell being configured remains detectable according to the cell identification conditions in the SMTC occasions available at the UE, as specified in section 9.3A of TS 38.133 [6],

- One of the SSBs measured from NR PSCell being configured also remains detectable during the NR PSCell configuration delay according to the cell identification conditions in the SMTC occasions available at the UE, as specified in section 9.3A of TS 38.133 [6].

otherwise it is unknown. The PCell interruption specified in 36.133 [23] section 7.32 is allowed only during the RRC reconfiguration procedure TS 36.331 [29]

The normative reference for this requirement is TS 36.133 [23] clause 7.31A.2.

10.3.6.0.2 NR PSCell Release Delay Requirement

The requirements in this section shall apply for a UE which is:

- configured with PCell, and

- configured with NR PSCell operating with CCA, and

- may also be configured with one or more SCells, and

- may also be configured with one or more NR SCells operating with CCA.

Upon receiving NR PSCell release in subframe *n*, the UE shall accomplish the release actions specified in TS 36.331 [29] no later than in subframe $n+ T_{RRC_delay}$:

Where

T_{RRC_delay} is the RRC procedure delay as specified in TS 36.331 [29].

The PCell interruption specified in 36.133 [23] section 7.32 is allowed only during the RRC reconfiguration procedure TS 36.331 [29].

The normative reference for this requirement is TS 36.133 [23] clause 7.31A.3.

10.3.6.1 EN-DC FR1 Addition and Release Delay of known NR PSCell on the carrier under CCA

10.3.6.1.1 Test purpose

This test is to verify that the NR PSCell addition and release delays on the carrier under CCA are within the requirements defined in 36.133 [23] clause 7.31A.2.

10.3.6.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 onwards, supporting EN-DC, RRM measurements, and UL with a shared spectrum NR carrier.

10.3.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.3.6.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.3.6.1.

10.3.6.1.4 Test description

The test consists of five successive time periods with duration of T1, T2, T3, T4, T5 and T6 respectively. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event B1 is configured for neighbour cell (Cell2). Before the start of T2 the UE is configured with the measurement gaps (gap pattern Id # 0). The Cell2 becomes known to the UE during T2. Therefore, during T2 the UE shall report Event B1. The point in time at which the RRC message to release measurement gap is transmitted from the test system defines the start of period T3. During T3, after measurement gap is released, the test system transmits the RRC message to the UE to add PSCell on radio channel 2.

The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

The test system shall observe the periodic reporting of CSI for PSCell during T5. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T5.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T5, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T6.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

10.3.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.3.6.1.4.1-1.

Table 10.3.6.1.4.1-1: Test configurations for EN-DC FR1 Addition and Release Delay of known NR PSCell on the carrier under CCA

Configuration	Description
10.3.6.1-1	LTE FDD, With CCA: NR SCS 30 kHz, BW 40 MHz, TDD
10.3.6.1-2	LTE TDD, With CCA: NR SCS 30 kHz, BW 40 MHz, TDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 10.3.6.1.4.1-2.

Table 10.3.6.1.4.1-2: Initial conditions for EN-DC FR1 Addition and Release Delay of known NR PSCell on the carrier under CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 4.5.7.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.3.6.1.4.1-3.
2. Message contents are defined in clause 10.3.6.1.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR FR1 cell. Cell 2 is the PSCell. The connection setup is done according to the settings in clause C.1.1.

Table 10.3.6.1.4.1-3: General test parameters for EN-DC FR1 Addition and Release Delay of known NR PSCell on the carrier under CCA

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell on the carrier under CCA
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-96	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in 38.133 [6] clause 9.1.11.1 into account plus margin. Value includes Test Tolerance analysis.
	Time to Trigger	s	0	
DRX			OFF	Continuous monitoring of primary cell

DL CCA model	Dynamic channel access Note 1, 3			As specified in clause D.7.2.1
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3			As specified in clause D.7.2.2
	Semi-static channel access Note 2,3			
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
PRACH configuration on cell2			FR1 PRACH configuration 2	Captured in A.7.1
CQI/PMI periodicity and offset configuration index on cell2			2ms	CQI reporting for PSCell every uplink subframe
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T304		ms	500	
L_{CCA_DL}			5	
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	≥ $T_{identify_irat_cca_without_index}$	$T_{identify_irat_cca_without_index}$ is defined in 36.133 [23] clause 8.1.2.4.21A and 8.1.2.4.22A. During this time the UE shall identify neighbour cell (cell2) and report event B1.
T3		s	3	During this time the test system transmit the RRC messages to release measurement gap and add the PSCell
T4		s	≥ $T_{config_PSCell_withCCA}$	During this time the UE adds the PSCell. $T_{config_PSCell_withCCA}$ is defined in 36.133 [23] clause 7.31A.2
T5		s	0.5	During this time the UE sends CSI reports for PSCell.
T6		s	0.5	During this time the UE releases the PSCell.

NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

10.3.6.1.4.2 Test procedure

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and PSCell (Cell 2) with CCA transmitting SSBs in DBT windows according to DL CCA model: PSCell (Cell 2). The test parameters for the two cells are given in Table 10.3.6.1.4.1-1 and 10.3.6.1.4.1-3.

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS shall set the parameters according to Table 10.3.6.1.5-1 as appropriate. The SS shall enable DL and UL CCA model according to Table 10.3.6.1.5-1. T1 starts.

3. The SS shall transmit an *RRCConnectionReconfiguration message* with event B1 configured.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. When T1 expires, the SS shall set T2 parameters according to Table 10.3.6.1.5-1 as appropriate. T2 starts.

6. The UE shall transmit a *MeasurementReport* message triggered by Event B1 for Cell 2 no later than 1.5s from the start of T2. Otherwise proceed with step 19.

7. The SS shall transmit an *RRCConnectionReconfiguration* message to release measurement gap. T3 starts.

8. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

9. During T3 the SS then shall transmit *RRCConnectionReconfiguration* message with condition *MCG_and_SCG* according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). T4 starts from the instant when the SS sends the last TTI containing the RRC message.

10. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

11. The UE shall send a PRACH to PSCell during T4. The UE shall send PRACH no later than 82ms from the start of T4, otherwise increase the number of failed iterations by one, switch off the UE and continue with step 17.

12. T5 starts.

13. During T5 the UE shall send at least one CSI report for PSCell with non-zero CQI index, otherwise increase the number of failed iterations by one, switch off the UE and continue to step 17.

14. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell) after the UE has send at least one CQI report with non-zero CQI index for PSCell (Cell 2). T6 starts from the instant when the SS sends the last TTI containing the RRC message.

15. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

16. The UE shall stop sending CSI reports for PSCell no later than 20ms from the start of T6, if so increase the number of passed iterations by one otherwise increase the number of failed iterations by one and switch off the UE. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).

17. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

18. If the UE is not switched off, the SS shall transmit an *RRCConnectionRelease* message to release the RRC connection then, the SS transmits in Cell 1 a Paging message (including *PagingRecord* with *UE-Identity*) for the UE and ensures the UE is in State E-UTRA RRC_CONNECTED with generic parameter Connectivity E-UTRA/EPC. If paging succeeds, go to step 20, otherwise switches off the UE.

19. Switches on the UE and ensures the UE is in state E-UTRA RRC_CONNECTED with generic procedure parameters *Connectivity* E-UTRA/EPC with Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

20. Repeat step 2-19 until the confidence level according to Annex G clause G.2.7 is achieved.

10.3.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.3.6.1.4.3-1: Common exception messages for EN-DC FR1 Addition and Release Delay of known NR PSCell on the carrier under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 for step 3 Table H.3.4-1 for step 6. Table H.3.4-4 with condition INTER-RAT NR and EVENT B1 Table H.3.4-5 with condition Pattern#0 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access
Specific message contents exceptions for Test Configuration 10.3.6.1-1, 10.3.6.1-2	Table H.3.4-6 with condition SMTC.1 and SSB.2 FR1

10.3.6.1.5 Test requirements

Tables 10.3.6.1.4.1-3 and 10.3.6.1.5-1 define the primary level settings including test tolerances for EN-DC FR1 Addition and Release Delay of known NR PSCell on the carrier under CCA.

Table 10.3.6.1.5-1: Cell Specific Parameters for EN-DC FR1 Addition and Release Delay of known NR PSCell on the carrier under CCA

Parameter	Unit	Config	Test					
			T1	T2	T3	T4	T5	T6
P_{CCA_DL} for dynamic channel access Note 5,7	-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75					
P_{CCA_DL} for semi-static channel access Note 6,7	-	P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375					
P_{CCA_UL} for dynamic channel access Note 5,7	-	1	1					
P_{CCA_UL} for semi-static channel access Note 6,7	-	1	1					
E-UTRA RF Channel Number		1,2	1					
NR RF Channel Number		1,2	2					
TDD configuration		1,2	TDDConf.1.1 CCA					
$BW_{channel}$		1,2	40: $N_{RB,c}$ = 106					
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1					
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1					
PDSCH Reference		1,2	SR1.1 CCA					
RMSI CORESET Reference		1,2	CR1.1 CCA					
Dedicated CORESET Reference		1,2	CCR1.1 CCA					
OCNG Patterns		1,2	OP.1					
DBT window configuration		1, 2	DBT.1					
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA					
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA					
SMTC configuration		1,2	SMTC.1					
TRS Configuration		1,2	TRS.1.2 TDD					
EPRE ratio of PSS to SSS	dB	1,2	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15 kHz	1,2	N/A	-88.6				

N_{oc} Note2	dBm/SCS	1,2	N/A	-85.6
$\hat{E}_s/I_{ot}$		1,2	-infinity	0
$\hat{E}_s/N_{oc}$		1,2	-infinity	0
SS-RSRP Note3	dBm/SCS	1,2	-infinity	-85.6
Io Note3	dBm/38.1MHz	1,2	N/A	-51.53
Propagation condition		1,2	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

The UE shall transmit the PRACH to PSCell at latest $T_{config_PSCell_withCCA}$ Note1 into T4.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T5.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T5

The UE shall stop sending CSI reports for PSCell in at latest 20 ms into T6.

All the above test requirements shall be fulfilled in order for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.31A.2 of TS 36.133 [23]:

$$T_{config_PSCell_withCCA} = T_{RRC_delay} + T_{processing} + T_{search_withCCA} + T_{\Delta_withCCA} + T_{PSCell_DU_withCCA} + 2 \text{ ms}$$

Where:

T_{RRC_delay} = 20 ms

$T_{processing}$ = 20 ms

$T_{search_withCCA}$ = 0

$T_{\Delta_withCCA} = (1+ L_2)*20$ ms

$T_{PSCell_DU_withCCA}$ = 20 ms.

L_2 is the number of SMTC occasions not available at the UE for fine time tracking and acquiring full timing information, where $L_2 \leq L_{CCA_DL}$.

10.4 Measurement procedures

10.4.1 Intra-frequency measurements

10.4.1.0 Minimum conformance requirements

10.4.1.0.1 Minimum conformance requitements for intra-frequency measurements without measurement gaps

10.4.1.0.1.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index_CCA}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index_CCA}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index_CCA}$.

$$T_{identify_intra_without_index_CCA} = (T_{PSS/SSS_sync_intra_CCA} + T_{SSB_measurement_period_intra_CCA}) \text{ ms}$$

$$T_{identify_intra_with_index\ CCA} = (T_{PSS/SSS_sync_intra_CCA} + T_{SSB_measurement_period_intra_CCA} + T_{SSB_time_index_intra_CCA}) \text{ ms}$$

Where:

$T_{PSS/SSS_sync_intra_CCA}$: it is the time period used in PSS/SSS detection given in table 10.4.1.0.1.1-1, 10.4.1.0.1.1-3 (deactivated Scell) .

$T_{SSB_time_index_intra_CCA}$: it is the time period used to acquire the index of the SSB being measured given in table 10.4.1.0.1.1-2 or 10.4.1.0.1.1-4 (deactivated SCell).

$T_{SSB_measurement_period_intra_CCA}$: equal to a measurement period of SSB based measurement given in table 10.4.1.0.1.2-1, 10.4.1.0.1.2-2 (deactivated Scell). $CSSF_{intra}$: it is a carrier specific scaling factor and is determined

- according to $CSSF_{outside_gap,i}$ in 38.133 [6] clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps, or according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps, i.e. when intra-frequency SMTC is fully overlapping with measurement gaps.

- $M_{pss/sss_sync_w/o_gaps_CCA}$: For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync_w/o_gaps\ CCA} = 60$. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync_w/o_gaps\ CCA} = 36$. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync_w/o_gaps\ CCA} = 36$.

- $M_{meas_period_w/o_gaps_CCA}$: For a UE supporting FR2-2 power class 1, $M_{meas_period_w/o_gaps\ CCA} = 60$. For a UE supporting FR2-2 power class 2, $M_{meas_period_w/o_gaps\ CCA} = 36$. For a UE supporting FR2-2 power class 3, $M_{meas_period_w/o_gaps\ CCA} = 36$.

- $M_{SSB_index_intra_CCA}$: For a UE supporting FR2-2 power class 1, $M_{SSB_index_intra\ CCA} = 72$ samples. For a UE supporting FR2-2 power class 2, $M_{SSB_index_intra\ CCA} = 48$ samples. For a UE supporting FR2 power class 3, $M_{SSB_index_intra\ CCA} = 48$ samples.

  N: is the UE Rx beam sweeping scaling factor. N = 12.

  When intra-frequency SMTC is fully non overlapping with measurement gaps or intra-frequency SMTC is fully overlapping with MGs, Kp=1

  When intra-frequency SMTC is partially overlapping with measurent gaps, Kp = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP.

For FR2-2,

$K_{layer1_measurement}$=TBD

If MCG DRX is in use, intra-frequency cell identification requirements specified in Table 10.4.1.0.1.1-1, Table 10.4.1.0.1.1-2, Table 10.4.1.0.1.1-3, Table 10.4.1.0.1.1-4, Table 10.4.1.0.1.1-5 and Table 10.4.1.0.1.1-6 shall depend on the MCG DRX cycle. If SCG DRX is in use, intra-frequency cell identification requirements specified in Table 10.4.1.0.1.1-1, Table 10.4.1.0.1.1-2, Table 10.4.1.0.1.1-3, Table 10.4.1.0.1.1-4, Table 10.4.1.0.1.1-5 and Table 10.4.1.0.1.1-6 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in 38.133 [6] clause 9.2A.4.3.

Table 10.4.1.0.1.1-1: Time period for PSS/SSS detection (FR1)

Condition	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	max(600ms, ceil((5+$L_{PSS/SSS}$) x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x (5+$L_{PSS/SSS}$) x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil((5+$L_{PSS/SSS}$) x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, $L_{PSS/SSS}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS}$< $L_{PSS/SSS,max}$. When DRX is configured, $L_{PSS/SSS}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS}$< $L_{PSS/SSS,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.	
NOTE 3: $L_{PSS/SSS,max}$ =7 for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,max}$ =5 for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{PSS/SSS,max}$ = 3 for DRX cycle>320ms.	
NOTE 4: Upon exceeding $L_{PSS/SSS,max}$, the UE is not required to meet the requirements for PSS/SSS detection.	

Table 10.4.1.0.1.1-2: Time period for time index detection (FR1)

Condition	$T_{SSB_time_index_intra_CCA}$
No DRX	max(120ms, ceil((3+L_{ind}) x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil (1.5 x (3+L_{ind}) x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil((3+L_{ind}) x K_p) x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, L_{ind} is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where L_{ind} ≤ $L_{ind,max}$. When DRX is configured, L_{ind} is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where L_{ind} ≤ $L_{ind,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.	
NOTE 3: $L_{ind,max}$ = 5 for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,max}$ = 3 for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{ind,max}$ =2 for DRX cycle>320ms.	
NOTE 4: Upon exceeding $L_{ind,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.	

Table 10.4.1.0.1.1-3: Time period for PSS/SSS detection, deactivated SCell (FR1)

Condition	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	(5 + $L_{PSS/SSS,deact}$) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	(5 + $L_{PSS/SSS,\ deact}$) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle>320ms	(5 + $L_{PSS/SSS,\ deact}$) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{PSS/SSS,\ deact}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,\ deact}$< $L_{PSS/SSS,\ deact,max}$. When DRX is configured, $L_{PSS/SSS,\ deact}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,\ deact}$< $L_{PSS/SSS,\ deact,max}$.When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.	

NOTE 2: $L_{PSS/SSS,\ deact,max,}$ = 7 for Max(DRX cycle, measCycleSCell)≤40ms where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,\ deact,max}$ = 5 for 40ms<Max(DRX cycle, measCycleSCell)≤320ms, $L_{PSS/SSS,\ deact,max}$ = 3 for DRX cycle>320ms.
NOTE 3: Upon exceeding $L_{PSS/SSS,\ deact,max,}$, the UE is not required to meet the requirements for PSS/SSS detection.

Table 10.4.1.0.1.1-4: Time period for time index detection, deactivated SCell (FR1)

Condition	$T_{SSB_time_index_intra_CCA}$
No DRX	$(3+L_{ind,deact})$ x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	$(3+L_{ind,deact})$ x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle>320ms	$(3+L_{ind,deact})$ x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$

NOTE 1: When DRX is not configured, $L_{ind,deact}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} < L_{ind,deact,max}$. When DRX is configured, $L_{ind,deact}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} < L_{ind,deact,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 2: $L_{ind,deact,max,}$ = 5 for Max(DRX cycle, measCycleSCell)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,deact,max}$ = 3 for 40ms<Max(DRX cycle, measCycleSCell)≤320ms, $L_{ind,deact,max}$ = 2 for DRX cycle>320ms.
NOTE 3: Upon exceeding $L_{ind,deact,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.

Table 10.4.1.0.1.1-5: Time period for PSS/SSS detection, (Frequency range FR2-2)

Condition	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	max(600ms, ceil(($M_{pss/sss_sync_w/o_gaps_CCA}$ x K_{FR} + N x $L_{PSS/SSS}$) x K_p x $K_{layer1_measurement}$) x SMTC period)$^{Note\ 1}$ x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x ($M_{pss/sss_sync_w/o_gaps_CCA}$ x K_{FR} + N x $L_{PSS/SSS}$) x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(($M_{pss/sss_sync_w/o_gaps_CCA}$ x K_{FR} + N x $L_{PSS/SSS}$) x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2: When DRX is not configured, $L_{PSS/SSS}$ is the number of SMTC occasion groups not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS} < L_{PSS/SSS,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{PSS/SSS}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS} < L_{PSS/SSS,max}$. [A [DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.
NOTE 3: $L_{PSS/SSS,max}$ =[7] for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,max}$ =[5] for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{PSS/SSS,max}$ = [3] for DRX cycle>320ms.
NOTE 4: Upon exceeding $L_{PSS/SSS,max}$, the UE is not required to meet the requirements for PSS/SSS detection.
NOTE 5: K_{FR} is a scaling factor depending on the frequency range and SSB SCS. K_{FR} = 1 if the SCS of the SSB of the cell being detected is 120 kHz, K_{FR} = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and K_{FR}= 3 if the SCS of the SSB of the cell being detected is 960 kHz.

Table 10.4.1.0.1.1-6: Time period for PSS/SSS detection, deactivated SCell (FR2-2)

DRX cycle	$T_{PSS/SSS_sync_intra_CCA}$

No DRX	Ceil((Mpss/sss_sync_w/o_gaps x KFR + N x LPSS/SSS,deact) x Kp) x measCycleSCell x CSSFintra
DRX cycle≤ 320ms	Ceil((Mpss/sss_sync_w/o_gaps x KFR + N x LPSS/SSS,deact) x Kp) x max(measCycleSCell, 1.5xDRX cycle) x CSSFintra
DRX cycle> 320ms	Ceil((Mpss/sss_sync_w/o_gaps x KFR + N x LPSS/SSS,deact) x Kp) x max(measCycleSCell, DRX cycle) x CSSFintra
NOTE 1: When DRX is not configured, $L_{PSS/SSS,\ deact}$ is the number of SMTC occasions groups not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,\ deact} < L_{PSS/SSS,\ deact,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{PSS/SSS,\ deact}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,\ deact} < L_{PSS/SSS,\ deact,max}$.When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. [A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle.	
NOTE 2: $L_{PSS/SSS,\ deact,max,}$ = [7] for Max(DRX cycle, measCycleSCell)≤40ms where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,\ deact,max}$ = [5] for 40ms<Max(DRX cycle, measCycleSCell)≤320ms, $L_{PSS/SSS,\ deact,max}$ = [3] for DRX cycle>320ms.	
NOTE 3: Upon exceeding $L_{PSS/SSS,\ deact,max,}$, the UE is not required to meet the requirements for PSS/SSS detection.	
NOTE 4: Void	
NOTE 5: K_{FR} is a scaling factor depending on the frequency range and SSB SCS. K_{FR} = 1 if the SCS of the SSB of the cell being detected is 120 kHz, K_{FR} = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and K_{FR}= 3 if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 10.4.1.0.1.1-7: Time period for time index detection (FR2-2)

DRX cycle	$T_{SSB_time_index_intra_CCA}$
No DRX	Max(200ms, ceil(($M_{SSB_index_intra_CCA}$ + N × L_{ind}) × K_p) × SMTC period) × $CSSF_{intra}$
DRX cycle≤ 320ms	Max(200ms, ceil(1.5 × (($M_{SSB_index_intra}$ + N × L_{ind}) × K_p) × Max(SMTC period, DRX cycle)) × $CSSF_{intra}$
DRX cycle> 320ms	ceil(($M_{SSB_index_intra}$ + N × L_{ind}) × K_p) × DRX cycle × $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, L_{ind} is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind} \le L_{ind,max}$. When DRX is configured, L_{ind} is the number of DRX cycles groups in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind} \le L_{ind,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.	
NOTE 3: $L_{ind,max}$ = 5 for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,max}$ = 3 for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{ind,max}$ =2 for DRX cycle>320ms.	
NOTE 4: Upon exceeding $L_{ind,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.	

Table 10.4.1.0.1.1-8: Time period for time index detection, deactivated SCell (FR2-2)

DRX cycle	$T_{SSB_time_index_intra_CCA}$
No DRX	Max(200ms, ceil(($M_{SSB_index_intra_CCA}$ + N × $L_{ind,deact}$) × K_p) × SMTC period) × $CSSF_{intra}$
DRX cycle≤ 320ms	Max(200ms, ceil(1.5 × (($M_{SSB_index_intra}$ + N × $L_{ind,deact}$) × K_p) × Max(SMTC period, DRX cycle)) × $CSSF_{intra}$
DRX cycle> 320ms	ceil(($M_{SSB_index_intra}$ + N × $L_{ind,deact}$) × K_p) × DRX cycle × $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, Lind,deact is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} \le L_{ind,deact,max}$. When DRX is configured, $L_{ind,deact}$ is the number of DRX cycles groups in which at least one SMTC occasion is not	

available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} \leq L_{ind,deact,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.

NOTE 3: $L_{ind,deact,max}$ = 5 for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,deact,max}$ = 3 for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{ind,deact,max}$ =2 for DRX cycle>320ms.

NOTE 4: Upon exceeding $L_{ind,deact,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.5.1.

10.4.1.0.1.2 Measurement period

The measurement period for intra-frequency measurements without gaps is as shown in table 10.4.1.0.1.2-1, 10.4.1.0.1.2-2 (deactivated SCell).

If SCG DRX is in use, intra-frequency measurement period requirements specified in Table 10.4.1.0.1.2-1, Table 10.4.1.0.1.2-2 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in 38.133 [6] clause 9.2A.4.3.

When the time period of unsuccessful measurement attempts due to exceeding the maximum number of unavailable at the UE SMTC occasions of an already identified cell exceeds the maximum time requirement for the cell to remain known defined in 38.133 [6] clause 9.2A.4.3, UE shall stop the measurement attempts on this SSB and perform the detection procedure again like for any other SSB.

Table 10.4.1.0.1.2-1: Measurement period for intra-frequency measurements without gaps (FR1)

Condition	$T_{SSB_measurement_period_intra_CCA}$
No DRX	max(200ms, ceil((5+L_{meas}) x K_p) x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x (5+L_{meas}) x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil((5+L_{meas}) x K_p) x DRX cycle x $CSSF_{intra}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified

NOTE 2: When DRX is not configured, L_{meas} is the number of SMTC occasions not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas} < L_{meas,max}$. When DRX is configured, L_{meas} is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas} < L_{meas,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.

NOTE 3: $L_{meas,max}$ = 7 for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas,max}$ = 5 for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{meas,max}$ = 3 for DRX cycle>320ms.

NOTE 4: Upon exceeding $L_{meas,max}$ over the period of time $T_{SSB_measurement_period_intra_CCA}$, the UE has to restart the measurement procedure.

Table 10.4.1.0.1.2-2: Measurement period for intra-frequency measurements without gaps, deactivated SCell (FR1)

Condition	$T_{SSB_measurement_period_intra_CCA}$
No DRX	(5+$L_{meas,deact}$) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	(5+$L_{meas,\ deact}$) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle>320ms	(5+$L_{meas,\ deact}$) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$

NOTE 1: When DRX is not configured, $L_{meas,deact}$ is the number of SMTC occasions not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact} < L_{meas,\ ,deact\ ,max}$. When DRX is configured, $L_{meas,deact}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact} < L_{meas,\ ,deact\ ,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC

	occasions more frequent than once per DRX cycle. When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 2:	$L_{meas, ,deact ,max,}$ = 7 for Max(DRX cycle, measCycleSCell)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas, ,deact ,max}$ = 5 for 40ms<Max(DRX cycle, measCycleSCell)≤320ms, $L_{meas, ,deact ,max}$ = 3 for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{meas,deact,max}$ over the period of time $T_{SSB_measurement_period_intra_CCA}$, the UE has to restart the measurement procedure.

Table 10.4.1.0.1.2-3: Measurement period for intra-frequency measurements without gaps (FR2-2)

DRX cycle	$T_{SSB_measurement_period_intra_CCA}$
No DRX	max(400ms, ceil(($M_{meas_period_w/o_gaps_CCA}$ + N x L_{meas}) x K_p x $K_{layer1_measurement}$) x SMTC period)$^{Note\ 1}$ x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x ($M_{meas_period_w/o_gaps_CCA}$ + N x L_{meas}) x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(($M_{meas_period_w/o_gaps_CCA}$ + N x L_{meas}) x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra}$
NOTE 1:	If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified
NOTE 2:	When DRX is not configured, L_{meas} is the number of SMTC occasion groups not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where L_{meas} <$L_{meas,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, L_{meas} is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where L_{meas} <$L_{meas,max}$. . [A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.
NOTE 3:	$L_{meas,max}$ = [7] for Max(DRX cycle,SMTC period)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas,max}$ = [5] for 40ms<Max(DRX cycle,SMTC period)≤320ms, $L_{meas,max}$ = [3] for DRX cycle>320ms.
NOTE 4:	Upon exceeding $L_{meas,max}$ over the period of time $T_{SSB_measurement_period_intra_CCA}$, the UE has to restart the measurement procedure.

Table 10.4.1.0.1.2-4: Measurement period for intra-frequency measurements without gaps, deactivated Scell (FR2-2)

DRX cycle	$T_{SSB_measurement_period_intra_CCA}$
No DRX	Ceil(($M_{meas_period_w/o_gaps_CCA}$ + N x $L_{meas,deact}$) x K_p) x measCycleSCell x $CSSF_{intra}$
DRX cycle≤ 320ms	Ceil(($M_{meas_period_w/o_gaps_CCA}$ + N x $L_{meas,deact}$) x K_p) x max(measCycleSCell, 1.5xDRX cycle) x $CSSF_{intra}$
DRX cycle> 320ms	Ceil(($M_{meas_period_w/o_gaps_CCA}$ + N x $L_{meas,deact}$) x K_p) x max(measCycleSCell, DRX cycle) x $CSSF_{intra}$
NOTE 1:	When DRX is not configured, $L_{meas,deact}$ is the number of SMTC occasion groups not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact}$ <$L_{meas, ,deact ,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{meas,deact}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact}$ <$L_{meas, ,deact ,max}$. [A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 2:	$L_{meas, ,deact ,max,}$ = [7] for Max(DRX cycle, measCycleSCell)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas, ,deact ,max}$ = [5] for 40ms<Max(DRX cycle, measCycleSCell)≤320ms, $L_{meas, ,deact ,max}$ = [3] for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{meas,deact,max}$ over the period of time $T_{SSB_measurement_period_intra_CCA}$, the UE has to restart the measurement procedure.

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.5.2.

10.4.1.0.2 Minimum conformance requitements for intra-frequency measurements with measurement gaps

10.4.1.0.2.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index_CCA}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index_CCA}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index\ CCA}$.

$$T_{identify_intra_without_index\ CCA} = T_{PSS/SSS_sync_intra_CCA} + T_{SSB_measurement_period_intra_CCA}\ \text{ms}$$

$$T_{identify_intra_with_index_CCA} = T_{PSS/SSS_sync_intra_CCA} + T_{SSB_measurement_period_intra_CCA} + T_{SSB_time_index_intra_CCA}$$

Where:

$T_{PSS/SSS_sync_intra_CCA}$: it is the time period used in PSS/SSS detection given in table 10.4.1.0.2.1-1.

$T_{SSB_time_index_intra_CCA}$: it is the time period used to acquire the index of the SSB being measured given in table 10.4.1.0.2.1-2.

$T_{SSB_measurement_period_intra_CCA}$: equal to a measurement period of SSB based measurement given in table 10.4.1.0.2.2-1 or 10.4.1.0.2.1-3.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps.

$M_{pss/sss_sync_w/o_gaps_CCA}$: For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync_w/o_gaps\ CCA} = 60$. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync_w/o_gaps\ CCA} = 36$. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync_w/o_gaps\ CCA} = 36$.

$M_{meas_period_w/o_gaps_CCA}$: For a UE supporting FR2-2 power class 1, $M_{meas_period_w/o_gaps\ CCA} = 60$. For a UE supporting FR2-2 power class 2, $M_{meas_period_w/o_gaps\ CCA} = 36$. For a UE supporting FR2-2 power class 3, $M_{meas_period_w/o_gaps\ CCA} = 36$.

- $M_{SSB_index_intra_CCA}$: For a UE supporting FR2-2 power class 1, $M_{SSB_index_intra\ CCA} = 72$ samples. For a UE supporting FR2-2 power class 2, $M_{SSB_index_intra\ CCA} = 48$ samples. For a UE supporting FR2 power class 3, $M_{SSB_index_intra\ CCA} = 48$ samples.

N: is the UE Rx beam sweeping scaling factor. N = 12.

If MCG DRX is in use, intra-frequency cell identification requirements specified in Table 10.4.1.0.2.1-1, Table 10.4.1.0.2.1-2 and Table 10.4.1.0.2.1-3 shall depend on the MCG DRX cycle. If SCG DRX is in use, intra-frequency cell identification requirements specified in Table 10.4.1.0.2.1-1, Table 10.4.1.0.2.1-2 and Table 10.4.1.0.2.1-3 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in 38.133 [6] clause 9.2A.4.3.

Table 10.4.1.0.2.1-1: Time period for PSS/SSS detection (FR1)

Condition	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	max(600ms, (5+$L_{PSS/SSS,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x (5+$L_{PSS/SSS,gaps}$)) x max(DRX cycle, MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle>320ms	(5+$L_{PSS/SSS,gaps}$) x (MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{PSS/SSS,gaps}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps} < L_{PSS/SSS,gaps,max}$. When DRX is configured, $L_{PSS/SSS,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not	

	available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps}$ <$L_{PSS/SSS,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 2:	$L_{PSS/SSS,gaps,max,}$ =7 for Max(DRX cycle, SMTC period, MGRP)≤40ms where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,gaps,max}$ =5 for 40ms<Max(DRX cycle, SMTC period, MGRP)≤320ms, $L_{PSS/SSS,gaps,max}$ =3 for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{PSS/SSS,gaps,max}$, the UE is not required to meet the requirements for PSS/SSS detection.

Table 10.4.1.0.2.1-2: Time period for time index detection (FR1)

Condition	$T_{SSB_time_index_intra_CCA}$
No DRX	max(120ms, (3+$L_{ind,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil(1.5x (3+$L_{ind,gaps}$)) x max(MGRP, SMTC period,DRX cycle) x $CSSF_{intra}$)
DRX cycle>320ms	(3+$L_{ind,gaps}$) x (MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1:	When DRX is not configured, $L_{ind,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps}$ < $L_{ind,gaps,max}$. When DRX is configured, $L_{ind,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps}$ < $L_{ind,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.
NOTE 2:	$L_{ind,gaps,max,}$ = 5 for Max(DRX cycle, SMTC period, MGRP)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,gaps,max}$ = 3 for 40ms<Max(DRX cycle, SMTC period, MGRP)≤320ms, $L_{ind,gaps,max}$ = 2 for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{ind,gaps,max}$ over the $T_{SSB_time_index_intra_CCA}$ period of time, the UE has to restart the time index detection procedure.

Table 10.4.1.0.2.1-3: Time period for PSS/SSS detection (FR2-2)

DRX cycle	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	max(600ms, ($M_{pss/sss_sync_with_gaps_CCA}$ x K_{FR} + N x $L_{ind,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x ($M_{pss/sss_sync_with_gaps_CCA}$ x K_{FR} + N x $L_{ind,gaps}$)) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	($M_{pss/sss_sync_with_gaps_CCA}$ x K_{FR} + N x $L_{ind,gaps}$) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1:	When DRX is not configured, $L_{ind,gaps}$ is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps}$ < $L_{ind,gaps,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{ind,gaps}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps}$ < $L_{ind,gaps,max}$.[A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP.
NOTE 2:	$L_{ind,gaps,max,}$ = [5] for Max(DRX cycle, SMTC period, MGRP)≤40ms where DRX cycle is 0 for non-DRX, $L_{ind,gaps,max}$ = [3] for 40ms<Max(DRX cycle, SMTC period, MGRP)≤320ms, $L_{ind,gaps,max}$ = [2] for DRX cycle>320ms.
NOTE 3:	Upon exceeding $L_{ind,gaps,max}$ over the $T_{SSB_time_index_intra_CCA}$ period of time, the UE has to restart the time index detection procedure.
NOTE 4:	K_{FR} is a scaling factor depending on the frequency range and SSB SCS. K_{FR} = 1 if the SCS of the SSB of the cell being detected is 120 kHz, K_{FR} = 2 if the SCS of the SSB of the cell being detected is 480 kHz, and K_{FR} = 3 if the SCS of the SSB of the cell being detected is 960 kHz.

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.6.1.

10.4.1.0.2.2 Intra-frequency measurement period

The measurement period for intra-frequency measurements with gaps is as shown in table 10.4.1.0.2.2-1.

If MCG DRX is in use, intra-frequency cell identification requirements specified in Table 10.4.1.0.2.2-1 and 10.4.1.0.2.2-2 shall depend on the MCG DRX cycle. If SCG DRX is in use, intra-frequency measurement period requirements specified in Table 10.4.1.0.2.2-1 and 10.4.1.0.2.2-2 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in 38.133 [6] clause 9.2A.4.3.

When the time period of unsuccessful measurement attempts due to exceeding the maximum number of unavailable at the UE SMTC occasions of an already identified cell exceeds the maximum time requirement for the cell to remain known defined in 38.133 [6] clause 9.2A.4.3, UE shall stop the measurement attempts on this SSB and perform the detection procedure again like for any other SSB.

Table 10.4.1.0.2.2-1: Measurement period for intra-frequency measurements with gaps (FR1)

Condition	$T_{SSB_measurement_period_intra_CCA}$
No DRX	max(200ms, (5+$L_{meas,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x (5+$L_{meas,gaps}$)) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	(5+$L_{meas,gaps}$) x (MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{meas,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_intra_CCA}$ for measurement where $L_{meas,gaps} < L_{meas,gaps,max}$. When DRX is configured, $L_{meas,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for measurement where $L_{meas,gaps} < L_{meas,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$.	
NOTE 2: $L_{meas,gaps,max}$ = 7 for Max(DRX cycle, SMTC period, MGRP)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas,gaps,max}$ = 5 for 40ms<Max(DRX cycle, SMTC period, MGRP)≤320ms, $L_{meas,gaps,max}$ = 3 for DRX cycle>320ms.	
NOTE 3: Upon exceeding $L_{meas,gaps,max}$ over the $T_{SSB_measurement_period_intra_CCA}$ period of time, the UE has to restart the measurement procedure.	

Table 10.4.1.0.2.2-2: Measurement period for intra-frequency measurements with gaps (FR2-2)

DRX cycle	$T_{SSB_measurement_period_intra_CCA}$
No DRX	max(400ms, ($M_{meas_period\ with_gaps_CCA}$ + N x $L_{meas,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x ($M_{meas_period\ with_gaps_CCA}$ + N x $L_{meas,gaps}$)) x max(MGRP, SMTC period, DRX cycle)) Note 1 x $CSSF_{intra}$
DRX cycle>320ms	($M_{meas_period\ with_gaps_CCA}$ + N x $L_{meas,gaps}$) x max(MGRP, DRX cycle) x $CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{meas,gaps}$ is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for measurement where $L_{meas,gaps} < L_{meas,gaps,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{meas,gaps}$ is the number of DRX cycle groups in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for measurement where $L_{meas,gaps} < L_{meas,gaps,max}$. A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP.	

NOTE 2: $L_{meas,gaps,max}$ = 7 for Max(DRX cycle, SMTC period, MGRP)≤40ms where DRX cycle is 0 for non-DRX, $L_{meas,gaps,max}$ = 5 for 40ms<Max(DRX cycle, SMTC period, MGRP)≤320ms, $L_{meas,gaps,max}$ = 3 for DRX cycle>320ms.
NOTE 3: Upon exceeding $L_{meas,gaps,max}$ over the $T_{SSB_measurement_period_intra_CCA}$ period of time, the UE has to restart the measurement procedure.

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.6.2.

10.4.1.0.3 Minimum conformance requitements for intra-frequency RSSI and channel occupancy measurements

10.4.1.0.3.1 Intra-frequency RSSI measurements

An RSSI measurement is defined as an intra-frequency measurement provided that the RSSI measurement bandwidth is fully contained within the current carrier bandwidth of the UE.

The UE physical layer shall be capable of performing the RSSI measurements, defined in TS 38.215 [10] on one or more serving carriers operating with CCA, TS 37.213 [37], if the carrier(s) are indicated by higher layers [13], and report the RSSI measurements to higher layers. The UE physical layer shall provide to higher layers a single RSSI sample for each OFDM symbol within each configured RSSI measurement duration [13] occurring with a configured RSSI measurement timing configuration periodicity [13], *rmtc-Periodicity*.

The UE can perform RSSI measurements without measurement gaps if RSSI measurement bandwidth is fully within the active DL BWP of the UE.

For performing intra-frequency RSSI measurement in FR2-2, UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to the DL RS associated with the TCI state provided in the RMTC configuration. If no TCI state is provided in the RMTC configuration, UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to one of the latest received PDSCH and the latest monitored CORESET in the active BWP of the current carrier in FR2-2.

For RSSI measurement in FR2-2 with SCS of 480 kHz or 960 kHz, the RSSI measurement results shall be derived based on symbols configured by RMTC except for the first symbol and the last symbol in RMTC, and there is no requirement when *measDurationSymbols* is configured as 1.

The measurement period for intra-frequency RSSI measurements without measurement gaps is as shown in Table 10.4.1.0.3.1-1 and Table 10.4.1.0.3.1-2, for FR1, and in 38.133 [6] Table 9.2A.7.4-1 and 38.133 [6] Table 9.2A.7.5-1 for FR2-2. The measurement period for intra-frequency RSSI measurements with measurement gaps is as shown in Table 10.4.1.0.3.1-3, for FR1 and in Table 10.4.1.0.3.1-6 for FR2-2.

Table 10.4.1.0.3.1-1: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are overlapping (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, *rmtc-Periodicity**$CSSF_{outside_gap,i}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, DRX cycle) *$CSSF_{outside_gap,i}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $CSSF_{outside_gap,i}$ is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in 38.133 [6] clause 9.1.5.1 for measurement conducted outside measurement gap.	

Table 10.4.1.0.3.1-2: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are not overlapping (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInt*erval, $N_{intra-MO}$**rmtc-Periodicity*)
DRX	max(*reportInt*erval, $N_{intra-MO}$*max(*rmtc-Periodicity*, DRXcycle length))
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $N_{intra-MO}$ is defined as the number of measurement objects that can be measured without gaps	

Table 10.4.1.0.3.1-3: Measurement period for intra-frequency RSSI measurements with measurement gaps (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{intra}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle length) x $CSSF_{intra}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $CSSF_{intra}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps.	

Table 10.4.1.0.3.1-4: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are overlapping (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, *rmtc-Periodicity**$CSSF_{outside_gap,i}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, DRX cycle) *$CSSF_{outside_gap,i}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $CSSF_{outside_gap,i}$ is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in 38.133 [6] clause 9.1.5.1 for measurement conducted outside measurement gap.	

Table 10.4.1.0.3.1-5: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are not overlapping (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInt*erval, $N_{intra-MO}$**rmtc-Periodicity*)
DRX	max(*reportInt*erval, $N_{intra-MO}$*max(*rmtc-Periodicity*, DRX cycle))
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $N_{intra-MO}$ is defined as the number of measurement objects that can be measured without gaps	

Table 10.4.1.0.3.1-6: Measurement period for intra-frequency RSSI measurements with measurement gaps (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{intra}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle) x $CSSF_{intra}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $CSSF_{intra}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps.	

If the UE requires measurement gaps to perform intra-frequency measurements, a single measurement gap pattern is used for all concurrent intra-frequency measurements, including intra-frequency RSSI measurements. The RSSI measurement duration and the measurement gap should be aligned, and the following additional condition should be fulfilled:

- Entire RSSI measurement duration should be contained in the measurement gap.

The RSSI measurement performed and reported according to this clause shall meet the RSSI measurement accuracy requirement in 38.133 [6] clause 10.1.34.1. The reported RSSI measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in 38.133 [6] clause 10.1.34.3.

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.7.1.

10.4.1.0.3.2 Intra-frequency channel occupancy measurements

The UE shall be capable of estimating the channel occupancy on one or more serving carrier frequencies indicated by higher layers [13], based on RSSI samples provided by the physical layer.

The UE can perform channel occupancy measurements without measurement gaps if RSSI measurement bandwidth is fully within the active DL BWP of the UE.

The measurement period for intra-frequency channel occupancy measurements without measurement gap is as shown in Table 10.4.1.0.3.2-1 and Table 10.4.1.0.3.1-2 for FR1, and in Table 10.4.1.0.3.2-4 and Table 10.4.1.0.3.1-5 for FR2-2. The measurement period for intra-frequency RSSI measurements with measurement gaps is as shown in Table 10.4.1.0.3.2-3 for FR1, and in Table 10.4.1.0.3.2-6 for FR2-2 .

Table 10.4.1.0.3.2-1: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are overlapping (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, *rmtc-Periodicity**$CSSF_{outside_gap,i}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, DRX cycle) *$CSSF_{outside_gap,i}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $CSSF_{outside_gap,i}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.1 for measurement conducted outside measurement gap.	

Table 10.4.1.0.3.2-2: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are not overlapping (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInt*erval, $N_{intra-MO}$**rmtc-Periodicity*)
DRX	max(*reportInt*erval, $N_{intra-MO}$*max(*rmtc-Periodicity*, DRXcycle length))
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $N_{intra-MO}$ is defined as the number of measurement objects that can be measured without gaps	

Table 10.4.1.0.3.2-3: Measurement period for intra-frequency Channel Occupancy measurements with measurement gaps (FR1)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{intra}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle length) x $CSSF_{intra}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $CSSF_{intra}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps.	

Table 10.4.1.0.3.2-4: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are overlapping (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, *rmtc-Periodicity**$CSSF_{outside_gap,i}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, DRX cycle) *$CSSF_{outside_gap,i}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $CSSF_{outside_gap,i}$ is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in 38.133 [6] clause 9.1.5.1 for measurement conducted outside measurement gap.	

Table 10.4.1.0.3.2-5: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are not overlapping (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInt*erval, $N_{intra-MO}$**rmtc-Periodicity*)
DRX	max(*reportInt*erval, $N_{intra-MO}$*max(*rmtc-Periodicity*, DRX cycle))
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $N_{intra-MO}$ is defined as the number of measurement objects that can be measured without gaps	

Table 10.4.1.0.3.2-6: Measurement period for intra-frequency Channel Occupancy measurements with measurement gaps (FR2-2)

Condition NOTE1,2	$T_{RSSI_measurement_period_intra_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{intra}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle) x $CSSF_{intra}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

NOTE 2: $CSSF_{intra}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps.

If the UE requires measurement gaps to perform intra-frequency measurements, a single measurement gap pattern is used for all concurrent intra-frequency measurements, including intra-frequency RSSI measurements. The RSSI measurement duration and the measurement gap should be aligned, and the following additional condition should be fulfilled:

- Entire RSSI measurement duration should be contained in the measurement gap.

The channel occupancy measurement performed and reported according to this clause shall meet the channel occupancy measurement accuracy requirements in 38.133 [6] clause 10.1.35.1. The reported channel occupancy measurement values contained in measurement reports shall be based on the measurement reporting range specified in TS 38.331 [13].

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.7.2.

10.4.1.1 EN-DC FR1 Event-triggered reporting tests on PSCC without gaps under non-DRX and CCA

10.4.1.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 10.4.1.0.1.1 and 10.4.1.0.1.2.

10.4.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and supporting intra-freq measurements on shared channel access.

10.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.1.1.

10.4.1.1.4 Test description

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and two cells on the same carrier frequency with CCA transmitting SSBs in DBT windows according to DL CCA model: PSCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table 10.4.1.1.4.1-1 and 10.4.1.1.4.1-3 below. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

10.4.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.1.1.4.1-1.

Table 10.4.1.1.4.1-1: Supported test configurations for EN-DC FR1 Event-triggered reporting tests on PSCC without gaps under non-DRX and CCA

Configuration	Description
10.4.1.1-1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.1.1-2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 10.4.1.1.4.1-2.

Table 10.4.1.1.4.1-2: Initial conditions for EN-DC FR1 Event-triggered reporting tests on PSCC without gaps under non-DRX and CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.1.1.4.1-3.
2. Message contents are defined in clause 10.4.1.1.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 10.4.1.1.4.1-3: General test parameters for EN-DC FR1 Event-triggered reporting tests on PSCC without gaps under non-DRX and CCA

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2	1	
NR RF Channel Number		Config 1,2	1, 2	
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2	NR cell 3	NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause D.7.2.1	
UL CCA model		Config 1,2	As specified in clause D.7.2.2	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μs	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	5	

10.4.1.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 10.4.1.1.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 with the corresponding offset according to Table 10.4.1.1.4.1-3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.4.1.1.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 10.4.1.1.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than 842ms, then the number of successful tests is increased by one. If the UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC PSCell release according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. The SS then shall transmit *RRCConnectionReconfiguration* message with condition *MCG_and_SCG* according to TS 36.508 [25] Table 4.6.1-8 to add NR Cell 2 (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If any the reconfiguration fails, switch off and on the UE and proceed with step 1.

10. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.4.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.1.1.4.3-1: Common Exception messages for EN-DC FR1 Event-triggered reporting tests on PSCC without gaps under non-DRX and CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-4 with A3-offset set as per Table 10.4.1.1.4.1-3 Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

10.4.1.1.5 Test requirements

Tables 10.4.1.1.4.1-3 and 10.4.1.1.5-1 define the primary level settings including test tolerances for EN-DC FR1 Event-triggered reporting tests on PSCC without gaps under non-DRX and CCA.

Table 10.4.1.1.5-1: Cell specific test parameters for EN-DC FR1 Event-triggered reporting tests on PSCC without gaps under non-DRX and CCA

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	2		2	
Duplex mode			Config 1,2	TDD			
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
TDD configuration			Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP			Config 1,2	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2	ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.2 TDD		NA	
OCNG Pattern			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	DBT.1		DBT.1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2	12		12	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_intra_cca}$		$T_{PSS/SSS_sync_intra_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							

EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	Config 1,2	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-91	-89.8	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2	4	-2.59	-Infinity	0.65
$\hat{E}_s / N_{oc}$	dB	Config 1,2	4	5.2	-Infinity	7
Io Note3	dBm/38.16MHz	Config 1,2	-58.49	-54.25	-58.49	-54.25
Propagation Condition		Config 1,2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_intra_without_index_CCA}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{identify_intra_cca_without_index} = (T_{PSS/SSS_sync_intra_cca} + T_{SSB_measurement_period_intra_cca})$ ms, where

$T_{PSS/SSS_sync_intra_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.1.0.1.1-1.

$T_{SSB_measurement_period_intra_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.1.0.1.2-1.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.1.2 Void

10.4.1.3 Void

10.4.1.4 EN-DC FR1 Event-triggered reporting tests on PSCC with per-UE gaps under DRX and CCA

10.4.1.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 10.4.1.0.2.1 and 10.4.1.0.2.2.

10.4.1.4.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier, supporting intra-freq measurements on shared channel access and long DRX.

10.4.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.1.4.

10.4.1.4.4 Test description

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and two cells on the same carrier frequency with CCA transmitting SSBs in DBT windows according to DL CCA model: PSCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table 10.4.1.4.4.1-1 and 10.4.1.4.4.1-3 below. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. Gap pattern #0 and DRX are configured on the UE.

10.4.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.1.4.4.1-1.

Table 10.4.1.4.4.1-1: Supported test configurations for EN-DC FR1 Event-triggered reporting tests on PSCC with per-UE gaps under DRX and CCA

Configuration	Description
10.4.1.4-1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.1.4-2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Configure the test equipment and the DUT according to the parameters in Table 10.4.1.4.4.1-2.

Table 10.4.1.4.4.1-2: Initial conditions for EN-DC FR1 Event-triggered reporting tests on PSCC with per-UE gaps under DRX and CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.1.4.4.1-3.
2. Message contents are defined in clause 10.4.1.4.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 10.4.1.4.4.1-3: General test parameters for EN-DC FR1 Event-triggered reporting tests on PSCC with per-UE gaps under DRX and CCA

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2	1	
NR RF Channel Number		Config 1,2	1, 2	

Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2	NR cell 3	NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause D.7.2.1	
UL CCA model		Config 1,2	As specified in clause D.7.2.2	
Measurement gap type		Config 1,2	Per-UE gaps	
Measurement gap repitition periodicity	ms	Config 1,2	40	
Measurement gap length	ms	Config 1,2	6	
Measurement gap offset	ms	Config 1,2	39	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	DRX.1	
Time offset between PCell and PSCell		Config 1,2	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μs	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	5	

10.4.1.4.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity EN-DC*, *DC bearer MCG and SCG*, *Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 10.4.1.4.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with gap configuration and event A3 offset according to Table 10.4.1.4.4.1-3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.4.1.1.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 10.4.1.4.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delay measured from the beginning of time period T2 is less than 842ms, then the number of successful tests is increased by one. If the UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC PSCell release according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. The SS then shall transmit *RRCConnectionReconfiguration* message with condition *MCG_and_SCG* according to TS 36.508 [25] Table 4.6.1-8 to add NR Cell 2 (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If any the reconfiguration fails, switch off and on the UE and proceed with step 1.

10. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.4.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.1.4.4.3-1: Common Exception messages for EN-DC FR1 Event-triggered reporting tests on PSCC with per-UE gaps under DRX and CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-4 with A3-offset set as per Table 10.4.1.4.4.1-3 Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 and gap offset 39 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.7-1 with condition DRX.1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

10.4.1.4.5 Test requirements

Tables 10.4.1.4.4.1-3 and 10.4.1.4.5-1 define the primary level settings including test tolerances for EN-DC FR1 Event-triggered reporting tests on PSCC with per-UE gaps under DRX and CCA.

Table 10.4.1.4.5-1: Cell specific test parameters for EN-DC FR1 Event-triggered reporting tests on PSCC with per-UE gaps under DRX and CCA

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2	2		2	
Duplex mode		Config 1,2	TDD			
$BW_{channel}$	MHz	Config 1,2	40: $N_{RB,c}$ = 106			
BWP BW	MHz	Config 1,2	40: $N_{RB,c}$ = 106			
TDD configuration		Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
TRS configuration		Config 1,2	TRS.1.2 TDD		NA	
OCNG Pattern		Config 1,2	OP.1		OP.1	

PDSCH Reference measurement channel			Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	DBT.1		DBT.1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2	12		12	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_intra_cca}$		$T_{PSS/SSS_sync_intra_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-91	-89.8	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2	4	-2.59	-Infinity	0.65
$\hat{E}_s / N_{oc}$		dB	Config 1,2	4	5.2	-Infinity	7
Io Note3		dBm/38.16MHz	Config 1,2	-58.49	-54.25	-58.49	-54.25
Propagation Condition			Config 1,2	AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_intra_without_index_CCA}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{identify_intra_cca_without_index} = (T_{PSS/SSS_sync_intra_cca} + T_{SSB_measurement_period_intra_cca})$ ms, where

$T_{PSS/SSS_sync_intra_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.1.0.1.1-1.

$T_{SSB_measurement_period_intra_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.1.0.1.2-1.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.2 Inter-frequency measurements

10.4.2.0 Minimum conformance requirements

10.4.2.0.1 Minimum conformance requirements for inter-frequency measurements

10.4.2.0.1.1 Inter-frequency cell identification

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter-frequency cell within $T_{identify_inter_cca_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter-frequency cell, in carrier frequencies with CCA, within $T_{identify_inter_cca_with_index}$. The UE shall be able to identify a new detectable inter-frequency SS block, in carrier frequencies with CCA, of an already detected cell within $T_{identify_inter_cca_without_index.}$

$$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})\ ms$$

$$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})\ ms$$

Where:

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in Table 10.4.2.0.1.1-1 and Table 10.4.2.0.1.1-3.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in Table 10.4.2.0.1.1-2 and Table 10.4.2.0.1.1-4.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in Table 10.4.2.0.1.2-1 and 10.4.2.0.1.2-2.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps.

$M_{pss/sss_sync_inter_CCA}$: For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync_inter\ CCA}$ = 96. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync_inter\ CCA}$ = 60. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync_inter\ CCA}$ = 60.

$M_{SSB_index_inter_CCA}$: For a UE supporting FR2-2 power class 2 or 3, $M_{SSB_index_inter\ CCA}$ = 48 samples. For a UE supporting FR2 power class 1, $M_{SSB_index_inter\ CCA}$ = 72 samples

$M_{meas_period_inter_CCA}$: For a UE supporting FR2-2 power class 1, $M_{meas_period_inter\ CCA}$ = 96. For a UE supporting FR2-2 power class 2, $M_{meas_period_inter\ CCA}$ = 60. For a UE supporting FR2-2 power class 3, $M_{meas_period_inter\ CCA}$ = 60

Table 10.4.2.0.1.1-1: Time period for PSS/SSS detection (FR1)

Condition NOTE1,2,3,4	$T_{PSS/SSS_sync_inter_cca}$
No DRX	max(600ms, (8+$L_{PSS/SSS,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{inter}$
DRX cycle ≤ 320ms	max(600ms, ceil((8+$L_{PSS/SSS,gaps}$)x1.5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle > 320ms	(8+$L_{PSS/SSS,gaps}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 38.133 [6] clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in TS 38.133 [6] clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: When DRX is not configured, $L_{PSS/SSS,gaps}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_inter_cca}$, for PSS/SSS detection, where $L_{PSS/SSS,gaps} \le L_{PSS/SSS,gaps,max}$. When DRX is configured, $L_{PSS/SSS,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_inter_cca}$, for PSS/SSS detection, where $L_{PSS/SSS,gaps} \le L_{PSS/SSS,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{inter}$.	
NOTE 4: $L_{PSS/SSS,gaps,max}$ = 12 for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms $L_{PSS/SSS,gaps,max}$ = 8 for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{PSS/SSS,gaps,max}$ = 5 for DRX cycle > 320 ms.	

Upon exceeding $L_{PSS/SSS,gaps,max}$, the UE is not required to meet the corresponding PSS/SSS detection requirement. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

Table 10.4.2.0.1.1-2: Time period for time index detection (FR1)

Condition NOTE1,2,3,4	$T_{SSB_time_index_inter_cca}$
No DRX	max(120ms, (3+ $L_{ind,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{inter}$
DRX cycle ≤ 320ms	max(120ms, ceil((3+ $L_{ind,gaps}$) x 1.5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle > 320ms	(3 + $L_{ind,gaps}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 38.133 [6] clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in TS 38.133 [6] clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: When DRX is not configured, $L_{ind,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_inter_cca}$ for time index identification, where $L_{ind,gaps} \le L_{ind,gaps,max}$. When DRX is configured, $L_{ind,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_inter_cca}$ for time index identification, where $L_{ind,gaps} \le L_{ind,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{inter}$.	
NOTE 4: $L_{ind,gaps,max}$ = 5 for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{ind,gaps,max}$ = 3 for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{ind,gaps,max}$ = 2 for DRX cycle > 320 ms.	

The UE shall restart the time index detection upon exceeding $L_{ind,gaps,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

Table 10.4.2.0.1.1-3: Time period for PSS/SSS detection, (Frequency range FR2-2)

Condition NOTE	T_{PSS/SSS_sync_inter}
No DRX	Max(600ms, ceil($M_{pss/sss_sync_inter_CCA}$+ [$N_{RxBeam}$] x $L_{PSS/SSS,gaps}$))× Max(MGRP, SMTC period)) × $CSSF_{inter}$
DRX cycle ≤ 320ms	Max(600ms, ceil(1.5 × $M_{pss/sss_sync_inter_CCA}$+ [$N_{RxBeam}$] x $L_{PSS/SSS,gaps}$)) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$
DRX cycle > 320ms	Ceil($M_{pss/sss_sync_inter_CCA}$+ [$N_{RxBeam}$] x $L_{PSS/SSS,gaps}$)× DRX cycle × $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 38.133 [6] clause 3.6.1	
NOTE 2: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 3: When DRX is not configured, $L_{PSS/SSS,gaps}$ is the number of SMTC occasion groups not available at the UE during $T_{PSS/SSS_sync_inter_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps} < L_{PSS/SSS,gaps,max}$. A SMTC occasion group consists of N_{RxBeam} consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{PSS/SSS}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_inter_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps} < L_{PSS/SSS,gaps,max}$. [A DRX occasion group consists of N_{RxBeam} consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.	
NOTE 4: $L_{PSS/SSS,gaps}$ = 12 for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms $L_{PSS/SSS,gaps}$ = 8 for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{PSS/SSS,gaps}$ = 5 for DRX cycle > 320 ms	

Upon exceeding $L_{PSS/SSS,gaps,max}$, the UE is not required to meet the corresponding PSS/SSS detection requirement. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

Table 10.4.2.0.1.1-4: Time period for time index detection (FR2-2)

Condition NOTE1,2,3,4	$T_{SSB_time_index_inter_cca}$
No DRX	max(120ms, ceil($M_{SSB_index_inter_CCA}$ + [N_{RxBeam}] x $L_{ind,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{inter}$
DRX cycle ≤ 320ms	max(120ms, ceil($M_{SSB_index_inter_CCA}$ + [N_{RxBeam}] x $L_{ind,gaps}$) x 1.5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle > 320ms	ceil($M_{SSB_index_inter_CCA}$ + [N_{RxBeam}] x $L_{ind,gaps}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 38.133 [6] clause 3.6.1	
NOTE 2: When DRX is not configured, $L_{ind,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_inter_cca, for}$ for time index identification, where $L_{ind,gaps} \le L_{ind,gaps,max}$. When DRX is configured, $L_{ind,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_inter_cca, for}$ for time index identification, where $L_{ind,gaps} \le L_{ind,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{inter}$.	
NOTE 3: $L_{ind,gaps,max}$ = [5] for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{ind,gaps,max}$ = [3] for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{ind,gaps,max}$ = [2] for DRX cycle > 320 ms.	

The UE shall restart the time index detection upon exceeding $L_{ind,gaps,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

The normative reference for this requirement is TS 38.133 [6] clause 9.3A.4.

10.4.2.0.1.2 Inter-frequency measurements

When measurement gaps are provided for inter-frequency measurements in carrier frequencies with CCA, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in 38.133 [6] clauses 10.1.28, 10.1.30 and 10.1.32, respectively, as shown in Table 10.4.2.0.1.2-1:

Table 10.4.2.0.1.2-1: Measurement period for inter-frequency measurements with gaps

Condition NOTE1,2,3,4	$T_{SSB_measurement_period_inter_cca}$
No DRX	max(200ms, (8+ L_{meas}) x max(MGRP, SMTC period)) x $CSSF_{inter}$
DRX cycle ≤ 320ms	max(200ms, ceil((8+ L_{meas}) x 1.5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle > 320ms	(8+ L_{meas}) x DRX cycle x $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 38.133 [6] clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in TS 38.133 [6] clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: When DRX is not configured, L_{meas} is the number of SMTC occasions not available at the UE during $T_{SSB_measurement_period_NR_cca}$, for inter-frequency measurements with gaps, where $L_{meas} \leq L_{meas,max}$. When DRX is configured, L_{meas} is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_NR_cca}$, for inter-frequency measurements with gaps, where $L_{meas} \leq L_{meas,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{inter}$.	
NOTE 4: $L_{meas,max}$ = 12 for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{meas,max}$ = 8 for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{meas,max}$ = 5 for DRX cycle > 320 ms.	

The UE shall restart the measurement upon exceeding $L_{meas,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

The UE shall stop the measurement attempts on the SSB of a cell and perform the detection procedure again, like for any other SSB, when the following conditions are met:

- $L_{meas} > L_{meas,max}$, and
- The time period of unsuccessful measurement attempts exceeds the maximum time required for the cell to remain known as defined in TS 38.133 [6] clause 9.3A.6.3.

Table 10.4.2.0.1.2-2: Measurement period for inter-frequency measurements with gaps (FR2-2)

Condition NOTE1,2,3,4	$T_{SSB_measurement_period_inter_cca}$
No DRX	max(200ms, ceil($M_{meas_period_inter_CCA}$ + [N_{RxBeam}] x $L_{meas,gaps}$) x max(MGRP, SMTC period)) x $CSSF_{inter}$
DRX cycle ≤ 320ms	max(200ms, ceil($M_{meas_period_inter_CCA}$ + [N_{RxBeam}] x $L_{meas,gaps}$) x 1.5) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{inter}$
DRX cycle > 320ms	ceil($M_{meas_period_inter_CCA}$ + [N_{RxBeam}] x $L_{meas,gaps}$) x DRX cycle x $CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in TS 38.133 [6] clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in TS 38.133 [6] clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: When DRX is not configured, $L_{meas,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_measurement_period_inter_cca}$, for inter-frequency measurements with gaps, where $L_{meas,gaps} \leq L_{meas,gaps,max}$. When DRX is configured, $L_{meas,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_NR_cca}$, for inter-frequency measurements with gaps, where $L_{meas,gaps} \leq L_{meas,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{inter}$.	
NOTE 4: $L_{meas,gaps,max}$ = [12] for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{meas,gaps,max}$ = [8] for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{meas,gaps,max}$ = [5] for DRX cycle > 320 ms.	

The UE shall restart the measurement upon exceeding $L_{meas,gap,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

The normative reference for this requirement is TS 38.133 [6] clause 9.3A.5.

10.4.2.0.1.3 Inter-frequency RSSI measurements

An RSSI measurement is defined as an inter-frequency measurement provided that the RSSI measurement bandwidth is not contained within the current carrier bandwidth of the UE.

The UE physical layer shall be capable of performing the RSSI measurements, defined in TS 38.215 [10] on one or more inter-frequency carriers operating with CCA, TS 37.213 [37], if the carrier(s) are indicated by higher layers [13], and report the RSSI measurements to higher layers. The UE physical layer shall provide to higher layers a single RSSI sample for each OFDM symbol within each configured RSSI measurement duration [13] occurring with a configured RSSI measurement timing configuration periodicity [13], *rmtc-Periodicity*. The requirements apply if *rmtc-SubframeOffset* [13] is configured.

For performing inter-frequency RSSI measurement in FR2-2,

- If a UE has serving cell in FR2-2,
  - If the TCI state is provided in RMTC configuration of FR2-2, the UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to the DL RS associated with the TCI state provided in the RMTC configuration. The UE does not expect to be configured with an explicit TCI-state in RMTC-Config with a reference serving cell in FR1 or FR2-1. If no TCI state is provided in the RMTC configuration, the UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to one of the latest received PDSCH and the latest monitored CORESET in the active BWP of a serving carrier in FR2-2.
- If a UE has no serving cell in FR2-2,
  - The UE does not expect that a TCI state is provided in RMTC configuration. It is up to UE implementation how to determine the spatial domain filter for the inter-frequency RSSI measurement in FR2-2, and no requirements are defined.

For RSSI measurement in FR2-2 with SCS of 480 kHz or 960 kHz, the RSSI measurement results shall be derived based on symbols configured by RMTC except for the first symbol and the last symbol in RMTC, and there is no requirements when *measDurationSymbols* is configured as 1.

Table 10.4.2.0.1.3-1: Measurement period for inter-frequency RSSI measurements with gaps

Condition NOTE1,2,3,4	$T_{RSSI_measurement_period_inter_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{inter}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle) x $CSSF_{inter}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $CSSF_{inter}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps.	

If the UE requires measurement gaps to perform inter-frequency measurements, a single measurement gap pattern is used for all concurrent inter-frequency measurements, including inter-frequency RSSI measurements. The RSSI measurement duration and the measurement gap shall be aligned, and the following additional condition shall be fulfilled:

- Entire RSSI measurement duration is contained in the measurement gap.

The RSSI measurement performed and reported according to this clause shall meet the RSSI measurement accuracy requirement in 38.133 [6] Clause 10.1.34.2. The reported RSSI measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in 38.133 [6] Clause 10.1.34.3.

The normative reference for this requirement is TS 38.133 [6] clause 9.3A.8.

10.4.2.0.2 Minimum conformance requirements for channel occupancy measurements

10.4.2.0.2.1 Channel occupancy measurement reporting

The UE shall be capable of estimating the channel occupancy on one or more carrier frequencies indicated by higher layers [13], based on RSSI samples provided by the physical layer. The requirements apply if *rmtc-SubframeOffset* [13] is configured.

Table 10.4.2.0.2.1-1: Measurement period for inter-frequency Channel Occupancy measurements with gaps

Condition NOTE1,2,3,4	$T_{CO_measurement_period_inter_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{inter}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle) x $CSSF_{inter}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: $CSSF_{inter}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps.	

If the UE requires measurement gaps to perform inter-frequency measurements, a single measurement gap pattern is used for all concurrent inter-frequency measurements, including inter-frequency channel occupancy measurements. The RSSI measurement duration used for channel occupancy measurement and the measurement gap shall be aligned, and the following additional condition shall be fulfilled:

- Entire RSSI measurement duration is contained in the measurement gap.

The channel occupancy measurement performed and reported according to this clause shall meet the channel occupancy measurement accuracy requirements in 38.133 [6] Clause 10.1.35.2. The reported channel occupancy measurement values contained in measurement reports shall be based on the measurement reporting range specified in TS 38.331 [13].

The normative reference for this requirement is TS 38.133 [6] clause 9.3A.9.

10.4.2.1 Void

10.4.2.2 Void

10.4.2.3 EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is not used

10.4.2.3.1 Test purpose

The purpose of the test is to verify that the UE makes correct reporting of an event in non-DRX without SSB time index detection and with CCA. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clauses 10.4.2.0.1.1 and 10.4.2.0.1.2.

10.4.2.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC and RRM measurements with a shared spectrum NR carrier.

10.4.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.2.3.

10.4.2.3.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test configurations and parameters are given in Tables 10.4.2.3.4.1-1, 10.4.2.3.4.1-2, and 10.4.2.3.4.1-3.

In this test 1 measurement gap pattern configuration # 0 as defined in Table 10.4.2.3.4.1-3 is provided.

10.4.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.2.3.4.1-1.

Table 10.4.2.3.4.1-1: Supported test configurations for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is not used

Config	Description
10.4.2.3-1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.3-2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.4.2.3.4.1-2.

Table 10.4.2.3.4.1-2: Initial conditions for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.2.3.4.1-3.
2. Message contents are defined in clause 10.4.2.3.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.2.3.4.1-3: General test parameters for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is not used

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2	1	One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.

Neighbour cell		Config 1,2	NR cell 3	NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause D.7.2.1	
UL CCA model		Config 1,2	As specified in clause D.7.2.2	
Gap Pattern Id		Config 1,2	0	As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μs	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	1.7	

10.4.2.3.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 10.4.2.3.5-1.

3. The SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.4.2.3.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 10.4.2.3.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 1602 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and proceeds with step 1. Otherwise proceed with step 2 for the next iteration.

10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.4.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.2.3.4.3-1: Common Exception messages for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access
Specific message contents exceptions for Test Configuration 10.4.2.3-1 and 10.4.2.3-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

10.4.2.3.5 Test requirements

Table 10.4.2.3.5-1 defines the primary level settings including test tolerances for all tests for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is not used.

Table 10.4.2.3.5-1: Cell specific test parameters for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is not used

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Duplex mode			Config 1,2	TDD			
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
TDD configuration			Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP			Config 1,2	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2	ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.12.1-1		As defined in A.12.1-1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	

PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2	12		12	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-90.99	-90.99	-Infinity	-87.99
$\hat{E}_s / I_{oc}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
Io Note3		dBm/38.16MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in Table 10.4.2.0.1.1-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table Table 10.4.2.0.1.2-1.

MGRP = 40 ms

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.2.4 EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used

10.4.2.4.1 Test purpose

The purpose of the test is to verify that the UE makes correct reporting of an event in DRX without SSB time index detection and with CCA. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clauses 10.4.2.0.1.1 and 10.4.2.0.1.2.

10.4.2.4.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC and RRM measurements with a shared spectrum NR carrier, and long DRX cycle.

10.4.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.2.4.

10.4.2.4.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables 10.4.2.4.4.1-1, 10.4.2.4.4.1-2, 10.4.2.4.4.1-3, 10.4.2.4.5-2 and 10.4.2.4.5-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table 10.4.2.4.4.1-3 is provided.

10.4.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.2.4.4.1-1.

Table 10.4.2.4.4.1-1: Supported test configurations for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used

Config	Description
10.4.2.4-1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.4-2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.4.2.4.4.1-2.

Table 10.4.2.4.4.1-2: Initial conditions for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.2.4.4.1-3.
2. Message contents are defined in clause 10.4.2.4.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.2.4.4.1-3: General test parameters for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause D.7.2.1		
UL CCA model		Config 1,2	As specified in clause D.7.2.2		
Gap Pattern Id		Config 1,2	0		As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2	9		
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	DRX.1	DRX.2	As specified in clause A.5
Time offset between PCell and PSCell		Config 1,2	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μs		Synchronous cells.
T1	s	Config 1,2	5		
T2	s	Config 1,2	2.5	17	

10.4.2.4.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 10.4.2.4.5-1.
3. The SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured on Cell 1.
4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.4.2.4.5-1. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 10.4.2.4.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 2402 ms for Test 1 or 16642 ms for Test2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).
8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and proceeds with step 1. Otherwise proceed with step 2 for the next iteration.
10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.
11. Repeat steps 1-10 for each Test in Tables 10.4.2.4.4.1-3 and 10.4.2.4.5-1 as appropriate.

10.4.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.2.4.4.3-1: Common Exception messages for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9 Table H.3.7-1 with Condition Gap, INTER-FREQ, DRX.1 (Test 1) and DRX.2 (Test 2) Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access
Specific message contents exceptions for Test Configuration 10.4.2.4-1 and 10.4.2.4-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

10.4.2.4.5 Test requirements

Table 10.4.2.4.5-1 defines the primary level settings including test tolerances for all tests for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used.

Table 10.4.2.4.5-1: Cell specific test parameters for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T12	T2
NR RF Channel Number			Config 1,2	1		2	
Duplex mode			Config 1,2	TDD			
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
TDD configuration			Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP			Config 1,2	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2	ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns			Config 1,2	OP.1		OP.1	
PDSCH Reference			Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.12.1-1		As defined in A.12.1-1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	

UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2	5		5	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-90.99	-90.99	-Infinity	-87.99
$\hat{E}_s / I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
Io Note3		dBm/38.16MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table 10.4.2.4.5-2: DRX-Configuration for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [13]

drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	ms640	
shortDRX	disable	disable	

Table 10.4.2.4.5-3: *TimeAlignmentTimer* Configuration for EN-DC FR1 vent triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [13]

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 the UE is not required to report SSB time index.$T_{identify_inter_cca_without_index}$ = ($T_{PSS/SSS_sync_inter_cca}$ + $T_{SSB_measurement_period_inter_cca}$) ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.2.0.1.1-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.2.0.1.2-1.

MGRP = 40 ms.

For test 1 DRX cycle = 40 ms and for test 2 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.2.5 EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is not used

10.4.2.5.1 Test purpose

The purpose of the test is to verify that the UE makes correct reporting of an event in non-DRX with SSB time index detection and with CCA. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clauses 10.4.2.0.1.1 and 10.4.2.0.1.2.

10.4.2.5.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC and RRM measurements with a shared spectrum NR carrier.

10.4.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.2.5.

10.4.2.5.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables 10.4.2.5.4.1-1, 10.4.2.5.4.1-2, and 10.4.2.5.4.1-3.

In this test 1 measurement gap pattern configuration # 0 as defined in Table 10.4.2.5.4.1-3 is provided.

10.4.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.2.5.4.1-1.

Table 10.4.2.5.5.1-1: Supported test configurations for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is not used

Config	Description
10.4.2.5-1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.5-2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.4.2.5.4.1-2.

Table 10.4.2.5.4.1-2: Initial conditions for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.2.5.4.1-3.
2. Message contents are defined in clause 10.4.2.5.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.2.5.4.1-3: General test parameters for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is not used

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2	1	One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.

Neighbour cell		Config 1,2	NR cell 3	NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause D.7.2.1	
UL CCA model		Config 1,2	As specified in clause D.7.2.2	
Gap Pattern Id		Config 1,2	0	As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μs	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	2	

10.4.2.5.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 10.4.2.5.5-1.

3. The SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.4.2.5.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 10.4.2.5.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 1922 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and proceeds with step 1. Otherwise proceed with step 2 for the next iteration.

10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.4.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.2.5.4.3-1: Common Exception messages for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB and with Condition SSB Index Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ and SSB Index Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access
Specific message contents exceptions for Test Configuration 10.4.2.5-1 and 10.4.2.5-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

10.4.2.5.5 Test requirements

Table 10.4.2.5.5-1 defines the primary level settings including test tolerances for all tests for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is not used.

Table 10.4.2.5.5-1: Cell specific test parameters for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is not used

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Duplex mode			Config 1,2	TDD			
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
TDD configuration			Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP			Config 1,2	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2	ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns			Config 1,2	OP.1		OP.1	
PDSCH Reference			Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.12.1-1		As defined in A.12.1-1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	

DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2	5		5	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-90.99	-90.99	-Infinity	-87.99
$\hat{E}_s / I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
Io Note3		dBm/38.16MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.2.0.1.1-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 10.4.2.0.1.1-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.2.0.1.2-1.

MGRP = 40 ms

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.2.6 EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is used

10.4.2.6.1 Test purpose

The purpose of the test is to verify that the UE makes correct reporting of an event in DRX without SSB time index detection and with CCA. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clauses 10.4.2.0.1.1 and 10.4.2.0.1.2.

10.4.2.6.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC and RRM measurements with a shared spectrum NR carrier, and long DRX cycle.

10.4.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.2.6.

10.4.2.6.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables 10.4.2.6.4.1-1, 10.4.2.6.4.1-2, 10.4.2.6.4.1-3, 10.4.2.6.5-2 and 10.4.2.6.5-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table 10.4.2.6.4.1-3 is provided.

10.4.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.2.6.4.1-1.

Table 10.4.2.6.4.1-1: Supported test configurations for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is used

Config	Description
10.4.2.6-1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.6-2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note 1: The UE is only required to be tested in one of the supported test configurations

Configure the test equipment and the DUT according to the parameters in Table 10.4.2.6.4.1-2.

Table 10.4.2.6.4.1-2: Initial conditions for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.2.6.4.1-3.
2. Message contents are defined in clause 10.4.2.6.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.2.6.4.1-3: General test parameters for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is used

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause D.7.2.1		
UL CCA model		Config 1,2	As specified in clause D.7.2.2		
Gap Pattern Id		Config 1,2	0		As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2	9		
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	DRX.1	DRX.2	As specified in clause A.5
Time offset between PCell and PSCell		Config 1,2	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μs		Synchronous cells.
T1	s	Config 1,2	5		

T2	s	Config 1,2	3	20	

10.4.2.6.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 10.4.2.6.5-1.

3. The SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.4.2.6.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 10.4.2.6.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 2882 ms for Test 1 or 19842 ms for Test2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and proceeds with step 1. Otherwise proceed with step 2 for the next iteration.

10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11. Repeat steps 1-10 for each Test in Tables 10.4.2.6.4.1-3 and 10.4.2.6.5-1 as appropriate.

10.4.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.2.6.4.3-1: Common Exception messages for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB and with Condition SSB Index Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ and SSB Index Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9 Table H.3.7-1 with Condition Gap, INTER-FREQ, DRX.1 (Test 1) and DRX.2 (Test 2 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access
Specific message contents exceptions for Test Configuration 10.4.2.6-1 and 10.4.2.6-2	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4

10.4.2.6.5 Test requirements

Table 10.4.2.6.5-1 defines the primary level settings including test tolerances for all tests for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is used.

Table 10.4.2.6.5-1: Cell specific test parameters for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is used

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Duplex mode			Config 1,2	TDD			
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106			
TDD configuration			Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP			Config 1,2	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2	ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns			Config 1,2	OP.1		OP.1	
PDSCH Reference			Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.12.1-1		As defined in A.12.1-1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	

UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2	2		2	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-90.99	-90.99	-Infinity	-87.99
$\hat{E}_s / I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
Io Note3		dBm/38.16MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table 10.4.2.6.5-2: DRX-Configuration for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is used

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [13]

drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	ms640	
shortDRX	disable	disable	

Table 10.4.2.6.5-3: *TimeAlignmentTimer* Configuration for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [13]

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 the UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.2.0.1.1-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 10.4.2.0.1.1-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.2.0.1.2-1.

MGRP = 40 ms.

For tests 1 DRX cycle = 40 ms and for tests 2 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.2.7 EN-DC FR1-FR1 Event-triggered reporting for FR1 cell without SSB time index detection when DRX is not used

10.4.2.7.1 Test purpose

The purpose of the test is to verify that the UE makes correct reporting of an event in non-DRX without SSB time index detection. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clauses 10.4.2.0.1.1 and 10.4.2.0.1.2.

10.4.2.7.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC and RRM measurements with a shared spectrum NR carrier.

10.4.2.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.2.7.

10.4.2.7.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables 10.4.2.7.4.1-1, 10.4.2.7.4.1-2, and 10.4.2.7.4.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table 10.4.2.7.4.1-3 is provided

10.4.2.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.2.7.4.1-1.

Table 10.4.2.73.4.1-1: Supported test configurations for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell without SSB time index detection when DRX is not used

Config	Description
10.4.2.7-1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.7-2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.7-3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.7-4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.7-5	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.7-6	E-UTRAN cell: LTE TDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.4.2.7.4.1-2.

Table 10.4.2.7.4.1-2: Initial conditions for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell without SSB time index detection when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.2.7.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.2.7.4.1-3.
2. Message contents are defined in clause 10.4.2.7.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different

frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.2.7.4.1-3: General test parameters for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell without SSB time index detection when DRX is not used

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3	NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause D.7.2.1	
UL CCA model		Config 1,2,3,4,5,6	As specified in clause D.7.2.2	
Gap Pattern Id		Config 1,2,3,4,5,6	0	As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μs	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	1.7	

10.4.2.7.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 10.4.2.7.5-1.

3. The SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured on Cell 1.
4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.4.2.7.5-1. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 10.4.2.7.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 1602 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).
8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and proceeds with step 1. Otherwise proceed with step 2 for the next iteration.
10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.4.2.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.2.7.4.3-1: Common Exception messages for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell without SSB time index detection when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access
Test Configuration 10.4.2.7-1, 10.4.2.7-2, 10.4.2.7-4 and 10.4.2.7-5	Table H.3.4-6 with Condition SSB.1 FR1
Test Configuration 10.4.2.7-3, 10.4.2.7-6,	Table H.3.4-6 with Condition SSB.2 FR1
Specific message contents exceptions for Test Configuration 10.4.2.7-2, 10.4.2.7-3, 10.4.2.7-5 and 10.4.2.7-6 Test Configuration 10.4.2.7-1 and 10.4.2.7-4	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5

10.4.2.7.5 Test requirements

Table 10.4.2.7.5-1 defines the primary level settings including test tolerances for all tests for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell without SSB time index detection when DRX is not used

Table 10.4.2.7.5-1: Cell specific test parameters for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell without SSB time index detection when DRX is not used

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4,5,6	1		2	
Duplex mode			Config 1,4	TDD		FDD	
			Config 2,3,5,6	TDD		TDD	
$BW_{channel}$		MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
TDD configuration			Config 1,4	TDDConf.1.1 CCA		NA	
			Config 2,5	TDDConf.1.1 CCA		TDDConf.1.1	
			Config 3,6	TDDConf.1.1 CCA		TDDConf.2.1	
Initial DL BWP			Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration			Config 1,2,3,4,5,6	TRS.1.2 TDD		NA	
OCNG Patterns			Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 CCA		SR.1.1 FDD	
			Config 2,5	SR.1.1 CCA		SR.1.1 TDD	
			Config 3,6	SR.1.1 CCA		SR.2.1 TDD	
CORESET Reference Channel			Config 1,4	CR.1.1 CCA		CR.1.1 FDD	
			Config 2,5	CR.1.1 CCA		CR.1.1 TDD	
			Config 3,6	CR.1.1 CCA		CR.2.1 TDD	
SSB parameters	Semi-static channel access Note 5,7		Config 1,4	SSB.1 CCA		SSB.1 FR1	
			Config 2,5	SSB.1 CCA		SSB.1 FR1	
			Config 3,6	SSB.1 CCA		SSB.2 FR1	
	Dynamic channel access Note 6,7		Config 1,4	SSB.2 CCA		SSB.1 FR1	
			Config 2,5	SSB.2 CCA		SSB.1 FR1	
			Config 3,6	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3,4,5,6	As defined in A.12.1-1		Not applicable	
SMTC configuration			Config 1,4	SMTC.2		SMTC.5	
			Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5	30		15	
			Config 3,6	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_DL}=0.9375		Not applicable	
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		Not applicable	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1		Not applicable	

	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1		Not applicable	
L_{CCA_DL}			Config 1,2,3,4,5,6	12		12	
W_{CCA_DL}		ms	Config 1,2,3,4,5,6	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2,3,4,5,6	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2,4,5	-98		-95	
			Config 3,6	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-88
			Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3		dBm/9.36 MHz	NR Config 1,2,4,5	-64.59	-64.59	-63.94	-56.15
		dBm/38.16MHz	NR Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.2.0.1.1-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.2.0.1.2-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.2.8 EN-DC FR1-FR1 Event triggered reporting for FR1 cell without SSB time index detection when DRX is used

10.4.2.8.1 Test purpose

The purpose of the test is to verify that the UE makes correct reporting of an event in DRX without SSB time index detection and with CCA. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clauses 10.4.2.0.1.1 and 10.4.2.0.1.2.

10.4.2.8.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC and RRM measurements with a shared spectrum NR carrier, and long DRX cycle.

10.4.2.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.2.8.

10.4.2.8.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables 10.4.2.8.4.1-1, 10.4.2.8.4.1-2, 10.4.2.8.4.1-3, 10.4.2.8.5-2 and 10.4.2.8.5-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table 10.4.2.8.4.1-3 is provided.

10.4.2.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.2.8.4.1-1.

Table 10.4.2.8.4.1-1: Supported test configurations for EN-DC FR1-FR1 Event triggered reporting for FR1 cell without SSB time index detection when DRX is used

Config	Description
10.4.2.8-1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.8-2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.8-3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.8-4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.8-5	E-UTRAN cell: LTE TDD

	NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.8-6	E-UTRAN cell: LTE TDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.4.2.8.4.1-2.

Table 10.4.2.8.4.1-2: Initial conditions for EN-DC FR1-FR1 Event triggered reporting for FR1 cell without SSB time index detection when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.2.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.2.8.4.1-3.
2. Message contents are defined in clause 10.4.2.8.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.2.8.4.1-3: General test parameters for EN-DC FR1-FR1 Event triggered reporting for FR1 cell without SSB time index detection when DRX is used

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause D.7.2.1		
UL CCA model		Config 1,2,3,4,5,6	As specified in clause D.7.2.2		
Gap Pattern Id		Config 1,2,3,4,5,6	0		As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		

TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX.1	DRX.2	As specified in clause A.5
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	2.5	17	

10.4.2.8.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 10.4.2.8.5-1.

3. The SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.4.2.8.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 10.4.2.8.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 2402 ms for Test 1 or 16642 ms for Test2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and proceeds with step 1. Otherwise proceed with step 2 for the next iteration.

10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11. Repeat steps 1-10 for each Test in Tables 10.4.2.8.4.1-3 and 10.4.2.8.5-1 as appropriate.

10.4.2.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.2.8.4.3-1: Common Exception messages for EN-DC FR1-FR1 Event triggered reporting for FR1 cell without SSB time index detection when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9 Table H.3.7-1 with Condition Gap, INTER-FREQ, DRX.1 (Test 1) and DRX.2 (Test 2) Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access
Test Configuration 10.4.2.8-1, 10.4.2.8-2, 10.4.2.8-4 and 10.4.2.8-5	Table H.3.4-6 with Condition SSB.1 FR1
Test Configuration 10.4.2.8-3, 10.4.2.8-6,	Table H.3.4-6 with Condition SSB.2 FR1
Specific message contents exceptions for Test Configuration 10.4.2.8-2, 10.4.2.8-3, 10.4.2.8-5 and 10.4.2.8-6 Test Configuration 10.4.2.8-1 and 10.4.2.8-4	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5

10.4.2.8.5 Test requirements

Table 10.4.2.8.5-1 defines the primary level settings including test tolerances for all tests for EN-DC FR1-FR1 Event triggered reporting for FR1 cell without SSB time index detection when DRX is used.

Table 10.4.2.8.5-1: Cell specific test parameters for EN-DC FR1-FR1 Event triggered reporting for FR1 cell without SSB time index detection when DRX is used

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	TDD		FDD	
		Config 2,3,5,6	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW	MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
TDD configuration		Config 1,4	TDDConf.1.1 CCA		NA	
		Config 2,5	TDDConf.1.1 CCA		TDDConf.1.1	
		Config 3,6	TDDConf.1.1 CCA		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	

TRS configuration			Config 1,2,3,4,5,6	TRS.1.2 TDD	NA
OCNG Patterns			Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,4	SR.1.1 CCA	SR.1.1 FDD
			Config 2,5	SR.1.1 CCA	SR.1.1 TDD
			Config 3,6	SR.1.1 CCA	SR.2.1 TDD
CORESET Reference Channel			Config 1,4	CR.1.1 CCA	CR.1.1 FDD
			Config 2,5	CR.1.1 CCA	CR.1.1 TDD
			Config 3,6	CR.1.1 CCA	CR.2.1 TDD
SSB parameters	Semi-static channel access Note 5,7		Config 1,4	SSB.1 CCA	SSB.1 FR1
			Config 2,5	SSB.1 CCA	SSB.1 FR1
			Config 3,6	SSB.1 CCA	SSB.2 FR1
	Dynamic channel access Note 6,7		Config 1,4	SSB.2 CCA	SSB.1 FR1
			Config 2,5	SSB.2 CCA	SSB.1 FR1
			Config 3,6	SSB.2 CCA	SSB.2 FR1
DBT window configuration			Config 1,2,3,4,5,6	As defined in A.12.1-1	Not applicable
SMTC configuration			Config 1,4	SMTC.2	SMTC.5
			Config 2,3,5,6	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5	30	15
			Config 3,6	30	30
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_DL}=0.9375	Not applicable
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	Not applicable
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1	Not applicable
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1	Not applicable
L_{CCA_DL}			Config 1,2,3,4,5,6	5	5
W_{CCA_DL}		ms	Config 1,2,3,4,5,6	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15kHz	Config 1,2,3,4,5,6	-98	-98
N_{oc} Note2		dBm/SCS	Config 1,2,4,5	-98	-95
			Config 3,6	-95	-95

SS-RSRP Note 3	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-88
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3	dBm/9.36 MHz	NR Config 1,2,4,5	-64.59	-64.59	-63.94	-56.15
	dBm/38.16MHz	NR Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table 10.4.2.8.5-2: DRX-Configuration for EN-DC FR1-FR1 Event triggered reporting for FR1 cell without SSB time index detection when DRX is used

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [13]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	ms640	
shortDRX	disable	disable	

Table 10.4.2.8.5-3: *TimeAlignmentTimer* Configuration for EN-DC FR1-FR1 Event triggered reporting for FR1 cell without SSB time index detection when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [13]

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 the UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.2.0.1.1-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.2.0.1.2-1.

MGRP = 40 ms.

For test 1 DRX cycle = 40 ms and for test 2 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.2.9 EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with SSB time index detection when DRX is not used

10.4.2.9.1 Test purpose

The purpose of the test is to verify that the UE makes correct reporting of an event in non-DRX with SSB time index detection. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clauses 10.4.2.0.1.1 and 10.4.2.0.1.2.

10.4.2.9.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC and RRM measurements with a shared spectrum NR carrier.

10.4.2.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.2.9.

10.4.2.9.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables 10.4.2.9.4.1-1, 10.4.2.9.4.1-2, and 10.4.2.9.4.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table 10.4.2.9.4.1-3 is provided

10.4.2.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.2.9.4.1-1.

Table 10.4.2.9.4.1-1: Supported test configurations for EN-DC FR1-FR1 Event-triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used

Config	Description
10.4.2.9-1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.9-2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.9-3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.9-4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.9-5	E-UTRAN cell: LTE TDD

	NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mod
10.4.2.9-6	E-UTRAN cell: LTE TDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.4.2.9.4.1-2.

Table 10.4.2.9.4.1-2: Initial conditions for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with SSB time index detection when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.2.9.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.2.9.4.1-3.
2. Message contents are defined in clause 10.4.2.9.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.2.9.4.1-3: General test parameters for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with SSB time index detection when DRX is not used

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3	NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause D.7.2.1	
UL CCA model		Config 1,2,3,4,5,6	As specified in clause D.7.2.2	
Gap Pattern Id		Config 1,2,3,4,5,6	0	As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	

TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μs	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	2	

10.4.2.9.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 10.4.2.9.5-1.
3. The SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured on Cell 1.
4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.4.2.9.5-1. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 10.4.2.9.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 1922 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and proceeds with step 1. Otherwise proceed with step 2 for the next iteration.
10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.4.2.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.2.9.4.3-1: Common Exception messages for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with SSB time index detection when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB and with Condition SSB Index Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ and SSB Index Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access
Test Configuration 10.4.2.9-1, 10.4.2.9-2, 10.4.2.9-4 and 10.4.2.9-5	Table H.3.4-6 with Condition SSB.1 FR1
Test Configuration 10.4.2.9-3, 10.4.2.9-6,	Table H.3.4-6 with Condition SSB.2 FR1
Specific message contents exceptions for Test Configuration 10.4.2.9-2, 10.4.2.9-3, 10.4.2.9-5 and 10.4.2.9-6 Test Configuration 10.4.2.9-1 and 10.4.2.9-4	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5

10.4.2.9.5 Test requirements

Table 10.4.2.9.5-1 defines the primary level settings including test tolerances for all tests for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with SSB time index detection when DRX is not used.

Table 10.4.2.9.5-1: Cell specific test parameters for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with SSB time index detection when DRX is not used

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	TDD		FDD	
		Config 2,3,5,6	TDD		TDD	
$BW_{channel}$	MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW	MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
TDD configuration		Config 1,4	TDDConf.1.1 CCA		NA	
		Config 2,5	TDDConf.1.1 CCA		TDDConf.1.1	
		Config 3,6	TDDConf.1.1 CCA		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,2,3,4,5,6	TRS.1.2 TDD		NA	
OCNG Patterns		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 CCA		SR.1.1 FDD	
		Config 2,5	SR.1.1 CCA		SR.1.1 TDD	
		Config 3,6	SR.1.1 CCA		SR.2.1 TDD	
CORESET Reference Channel		Config 1,4	CR.1.1 CCA		CR.1.1 FDD	
		Config 2,5	CR.1.1 CCA		CR.1.1 TDD	
		Config 3,6	CR.1.1 CCA		CR.2.1 TDD	

SSB parameters	Semi-static channel access Note 5,7		Config 1,4	SSB.1 CCA		SSB.1 FR1	
			Config 2,5	SSB.1 CCA		SSB.1 FR1	
			Config 3,6	SSB.1 CCA		SSB.2 FR1	
	Dynamic channel access Note 6,7		Config 1,4	SSB.2 CCA		SSB.1 FR1	
			Config 2,5	SSB.2 CCA		SSB.1 FR1	
			Config 3,6	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3,4,5,6	As defined in A.12.1-1		Not applicable	
SMTC configuration			Config 1,4	SMTC.2		SMTC.5	
			Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5	30		15	
			Config 3,6	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_DL}=0.9375		Not applicable	
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		Not applicable	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1		Not applicable	
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1		Not applicable	
L_{CCA_DL}			Config 1,2,3,4,5,6	5		5	
W_{CCA_DL}		ms	Config 1,2,3,4,5,6	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2,3,4,5,6	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2,4,5	-98		-95	
			Config 3,6	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-88
			Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3		dBm/9.36 MHz	NR Config 1,2,4,5	-64.59	-64.59	-63.94	-56.15
		dBm/38.16MHz	NR Config 3,6	-58.49	-58.49	-63.94	-56.15

Propagation Condition		Config 1,2,3,4,5,6	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.2.0.1.1-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 10.4.2.0.1.1-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.2.0.1.2-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.2.10 EN-DC FR1-FR1 Event triggered reporting for FR1 cell with SSB time index detection when DRX is used

10.4.2.10.1 Test purpose

The purpose of the test is to verify that the UE makes correct reporting of an event in DRX without SSB time index detection and with CCA. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clauses 10.4.2.0.1.1 and 10.4.2.0.1.2.

10.4.2.10.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC and RRM measurements with a shared spectrum NR carrier, and long DRX cycle.

10.4.2.10.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.2.10.

10.4.2.10.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables 10.4.2.10.4.1-1, 10.4.2.10.4.1-2, 10.4.2.10.4.1-3, 10.4.2.10.5-2 and 10.4.2.10.5-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table 10.4.2.10.4.1-3 is provided

10.4.2.10.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.2.10.4.1-1.

Table 10.4.2.10.4.1-1: Supported test configurations for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with SSB time index detection when DRX is used

Config	Description
10.4.2.10-1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.10-2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.10-3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.10-4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.2.10-5	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mod
10.4.2.10-6	E-UTRAN cell: LTE TDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.4.2.10.4.1-2.

Table 10.4.2.10.4.1-2: Initial conditions for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with SSB time index detection when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.2.10.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.2.10.4.1-3.
2. Message contents are defined in clause 10.4.2.10.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.2.10.4.1-3: General test parameters for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with SSB time index detection when DRX is used

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause D.7.2.1		
UL CCA model		Config 1,2,3,4,5,6	As specified in clause D.7.2.2		
Gap Pattern Id		Config 1,2,3,4,5,6	0		As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX.1	DRX.2	As specified in clause A.5
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μs		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μs		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	3	20	

10.4.2.10.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 10.4.2.10.5-1.

3. The SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured on Cell 1.
4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.4.2.10.5-1. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 10.4.2.10.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event A3 embedded in E-UTRA RRC message *ULInformationTransferMRDC*. If the overall delays measured from the beginning of time period T2 is less than 2882 ms for Test 1 or [9842 ms for Test2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).
8. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. The SS shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. If either of the reconfiguration in step 7 or step 9 fails, SS switches off and on the UE and proceeds with step 1. Otherwise proceed with step 2 for the next iteration.
10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.
11. Repeat steps 1-10 for each Test in Tables 10.4.2.10.4.1-3 and 10.4.2.10.5-1 as appropriate.

10.4.2.10.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.2.10.4.3-1: Common Exception messages for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with SSB time index detection when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB and with Condition SSB Index Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ and SSB Index Table H.3.4-1a Table H.3.4-2 Table H.3.4-3 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern #0 and gap offset = 9 Table H.3.7-1 with Condition Gap, INTER-FREQ, DRX.1 (Test 1) and DRX.2 (Test 2) Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access
Test Configuration 10.4.2.10-1, 10.4.2.10-2, 10.4.2.10-4 and 10.4.2.10-5	Table H.3.4-6 with Condition SSB.1 FR1
Test Configuration 10.4.2.10-3, 10.4.2.10-6,	Table H.3.4-6 with Condition SSB.2 FR1
Specific message contents exceptions for Test Configuration 10.4.2.10-2, 10.4.2.10-3, 10.4.2.10-5 and 10.4.2.10-6 Test Configuration 10.4.2.10-1 and 10.4.2.10-4	Table H.3.1-3 with Conditions INTER-FREQ MO and Synchronous cells Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5

10.4.2.10.5 Test requirements

Table 10.4.2.10.5-1 defines the primary level settings including test tolerances for all tests for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with SSB time index detection when DRX is used.

Table 10.4.2.10.5-1: Cell specific test parameters for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with SSB time index detection when DRX is used

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4,5,6	1		2	
Duplex mode			Config 1,4	TDD		FDD	
			Config 2,3,5,6	TDD		TDD	
$BW_{channel}$		MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2,4,5	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3,6	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
TDD configuration			Config 1,4	TDDConf.1.1 CCA		NA	
			Config 2,5	TDDConf.1.1 CCA		TDDConf.1.1	
			Config 3,6	TDDConf.1.1 CCA		TDDConf.2.1	
Initial DL BWP			Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration			Config 1,2,3,4,5,6	TRS.1.2 TDD		NA	
OCNG Patterns			Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 CCA		SR.1.1 FDD	
			Config 2,5	SR.1.1 CCA		SR.1.1 TDD	
			Config 3,6	SR.1.1 CCA		SR.2.1 TDD	
CORESET Reference Channel			Config 1,4	CR.1.1 CCA		CR.1.1 FDD	
			Config 2,5	CR.1.1 CCA		CR.1.1 TDD	
			Config 3,6	CR.1.1 CCA		CR.2.1 TDD	
SSB parameters	Semi-static channel access Note 5,7		Config 1,4	SSB.1 CCA		SSB.1 FR1	
			Config 2,5	SSB.1 CCA		SSB.1 FR1	
			Config 3,6	SSB.1 CCA		SSB.2 FR1	
	Dynamic channel access Note 6,7		Config 1,4	SSB.2 CCA		SSB.1 FR1	
			Config 2,5	SSB.2 CCA		SSB.1 FR1	
			Config 3,6	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3,4,5,6	As defined in A.12.1-1		Not applicable	
SMTC configuration			Config 1,4	SMTC.2		SMTC.5	
			Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5	30		15	
			Config 3,6	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_DL}=0.9375		Not applicable	
	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		Not applicable	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1		Not applicable	

	Dynamic channel access Note 6,7		Config 1,2,3,4,5,6	P_{CCA_UL}=1		Not applicable	
L_{CCA_DL}			Config 1,2,3,4,5,6	2		2	
W_{CCA_DL}		ms	Config 1,2,3,4,5,6	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2,3,4,5,6	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2,4,5	-98		-95	
			Config 3,6	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-88
			Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io Note3		dBm/9.36 MHz	NR Config 1,2,4,5	-64.59	-64.59	-63.94	-56.15
		dBm/38.16MHz	NR Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table 10.4.2.10.5-2: DRX-Configuration for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with SSB time index detection when DRX is used

Field	Test1	Test2	Comment
	Value	Value	

drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [13]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	ms640	
shortDRX	disable	disable	

Table 10.4.2.10.5-3: *TimeAlignmentTimer* Configuration for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with SSB time index detection when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [13]

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_}$from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 the UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.2.0.1.1-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 10.4.2.0.1.1-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.2.0.1.2-1.

MGRP = 40 ms.

For test 1 DRX cycle = 40 ms and for test 2 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.3 L1-RSRP measurement for beam reporting under CCA

10.4.3.0 Minimum conformance requirements

10.4.3.0.1 Minimum conformance requitements for SSB-based L1-RSRP measurement for beam reporting under CCA

10.4.3.0.1.1 SSB-based L1-RSRP Reporting under CCA

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource under CCA for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$ is defined in Table 10.4.3.0.1.1-1 for FR1,

where

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise

For FR1,

- $P=\frac{1}{1-\frac{T_{SSB}}{xGP}}$, when in the monitored cell there are GAPs configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- P=1 when in the monitored cell there are no GAPs overlapping with any occasion of the SSB.

Where:

T_{SSB} = ssb-periodicityServingCell

$T_{SMTCperiod}$ = the configured SMTC period or SMTC2 period if configured

If the high layer in TS 38.331 [13] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet previous conditions.

UE shall report RSRP_0 (Not valid) if $L_1 > L_{1max}$, where L1 and $L1_{max}$ are defined in Table 10.4.3.0.1.1-1.

Table 10.4.3.0.1.1-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}((M+L1)*P)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*(M+L1)*P)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}((M+L1)*P)*T_{DRX}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
Note 2: L1=0 if higher layer parameter timeRestrictionForChannelMeasurement is configured. Otherwise, when DRX is not configured L1 is the number of SSBs not available at the UE during $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$, and when DRX is configured L1 is the number of DRX cycles in which at least one SSB is not available at the UE during $T_{L1\text{-}RSRP_Measurement_Period_SSB_CCA}$, where $L1 \le L1_{max}$. The UE is not required to determine the availability of SSB occasions more frequent than Once per $\max(T_{Report}, P * T_{SSB})$ if no DRX is used, Once per $\max(T_{Report}, \text{Ceil}(1.5 * P) * \max(T_{DRX}, T_{SSB}))$ if DRX cycle ≤ 320ms, Once per $P * T_{DRX}$ if DRX cycle > 320ms.	
Note 3: $L1_{max}$ =7 for $\max(T_{DRX},T_{SSB}) \le 40$ms assuming $T_{DRX}=0$ for non-DRX, $L1_{max}$ =5 for 40ms < $\max(T_{DRX}, T_{SSB}) \le 320$ms, $L1_{max}$ =3 for T_{DRX} > 320ms.	

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to TS 38.133 [6] clause 10.1.33 for FR1 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in TS 38.133 [6] clause 10.1.33 for FR1. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in TS 38.133 [6] Table 10.1.6.1-2.

During EN-DC operation, for FR1, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected if the UE is capable of per-FR gap, or an additional delay can be expected.

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.1.33 for FR1.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [9].

The UE is required to be capable of measuring SSB for L1-RSRP without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

When the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports simultaneousRxDataSSB-DiffNumerology, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
  - If UE does not support simultaneousRxDataSSB-DiffNumerology, UE is required to measure SSB for L1-RSRP measurement.

The normative reference for this requirement is TS 38.133 [6] clause 9.5A.3.1, 9.5A.4.1 and 9.5A.5.1.

10.4.3.1 EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is not used

10.4.3.1.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement under CCA when DRX is not used. This test will partly verify the L1-RSRP measurement requirements in clause 10.4.3.0.1.1.

10.4.3.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR1 with a shared spectrum NR carrier, RRM measurements and UL with a shared spectrum NR carrier.

10.4.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.3.1.

10.4.3.1.4 Test description

There are two cells in the test, E-UTRAN Pcell (Cell 1) and FR1 PSCell (Cell 2) which operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in Table A.6B.1-1. The test configurations and parameters for the Cell 2 are given in Table 10.4.3.1.4.1-1 and Table 10.4.3.1.4.1-2 below respectively.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

10.4.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.3.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 10.4.3.1.4.1-2. Test environment parameters are given in Table 10.4.3.1.4.1-3.

Table 10.4.3.1.4.1-1: Supported test configurations for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is not used

Config	Description
10.4.3.1-1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

10.4.3.1-2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 10.4.3.1.4.1-2: General test parameters for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is not used

Parameter	Config	Unit	Value
SSB GSCN	1,2		freq1
DL CCA model	1,2		As specified in D.7.2.1
UL CCA model	1,2		As specified in D.7.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
$BW_{channel}$	1,2	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		Off
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1,2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with			

downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Table 10.4.3.1.4.1-3: Test Environment parameters for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.4.3.1.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Table A.6B.1-1. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for SSB based L1-RSRP measurements.

10.4.3.1.4.2 Test procedure

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above Table 10.4.3.1.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 10.4.3.1.4.1-2.

2. Set the parameters according to T1 in Table 10.4.3.1.5-1. The SS shall enable DL and UL CCA model according to Table 10.4.3.1.5-1. T1 starts.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 80 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 10.4.3.1.5-1. T2 starts.

5. The UE shall start sending L1-RSRP reports. The SS shall check following requirements:

   R1: the UE shall start to transmit valid reports no later than 682 ms from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 (Table 10.4.3.1.5-2) and the relative L1-RSRP requirement for SSB#0 in Table 10.4.3.1.5-3. If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 10.4.3.1.5-2 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

R4: The DIFF RSRP value of SSB#0 reported by the UE is compared to the expected DIFF RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 10.4.3.1.5-3 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

9. If any of the reconfiguration at steps 7 or 8 fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.4.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.3.1.4.3-1: Common Exception messages for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10 Table H.3.4-1 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 10.4.3.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			

}			

10.4.3.1.5 Test requirement

Table 10.4.3.1.5-1 defines the primary level settings for all tests for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is not used.

Table 10.4.3.1.5-1: SSB specific test parameters for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is not used

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1,2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1,2		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1,2		1.0	1.0	1.0	1.0
N_{oc} Note2	1,2	dBm/15kHz	-94.65			
N_{oc} Note2	1,2	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1,2	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1,2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.15
Io Note3	1,2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1,2	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5: The signal levels apply for SSS Res when the discovery burst is transmitted during DBT windows.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in Table 10.4.3.1.5-2 and relative accuracy requirement in Table 10.4.3.1.5-3. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

Table 10.4.3.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58

Highest reported value (SSB#1)	-	78

Table 10.4.3.1.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.3.2 EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is used

10.4.3.2.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement under CCA when DRX is used. This test will partly verify the L1-RSRP measurement requirements in clause 10.4.3.0.1.1.

10.4.3.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR1 with a shared spectrum NR carrier, RRM measurements, UL with a shared spectrum NR carrier and long DRX cycle.

10.4.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.3.2.

10.4.3.2.4 Test description

There are two cells in the test, E-UTRAN Pcell (Cell 1) and FR1 PSCell (Cell 2) which operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in Table A.6B.1-1. The test configurations and parameters for the Cell 2 are given in Table 10.4.3.2.4.1-1 and Table 10.4.3.2.4.1-2 below respectively.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

10.4.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.3.2.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 10.4.3.2.4.1-2. Test environment parameters are given in Table 10.4.3.2.4.1-3.

Table 10.4.3.2.4.1-1: Supported test configurations for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is used

Config	Description
10.4.3.2-1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.3.2-2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 10.4.3.2.4.1-2: General test parameters for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is used

Parameter	Config	Unit	Value
SSB GSCN	1,2		freq1
DL CCA model	1,2		As specified in D.7.2.1
UL CCA model	1,2		As specified in D.7.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
$BW_{channel}$	1,2	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		DRX.3
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1,2		AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Table 10.4.3.2.4.1-3: Test Environment parameters for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.4.3.2.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Table A.6B.1-1. Cell 2 is NR FR1 cell (PSCell). Cell 2 is the target for SSB based L1-RSRP measurements. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. DRX is configured as specified in Table 10.4.3.2.4.1-2.

10.4.3.2.4.2 Test procedure

Same test procedure as in subclause 10.4.3.1.4.2 with tables 10.4.3.1.4.1-2 and 10.4.3.1.5-1 replaced by tables 10.4.3.2.4.1-2 and 10.4.3.2.5-1.

10.4.3.2.4.3 Message contents

Same message content as in subclause 10.4.3.1.4.3 with the following exception:

Table 10.4.3.2.4.3-1: Common Exception messages for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3

10.4.3.2.5 Test requirement

Table 10.4.3.2.5-1 defines the primary level settings for all tests for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is used.

Table 10.4.3.2.5-1: SSB specific test parameters for EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is used

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1,2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4,7	1,2		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1,2		1.0	1.0	1.0	1.0
N_{oc} Note2	1,2	dBm/15kHz	-94.65			

N_{oc} Note2	1,2	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1,2	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1,2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.15
Io Note3	1,2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1,2	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in Table 10.4.3.2.5-2 and relative accuracy requirement in Table 10.4.3.2.5-3. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

Table 10.4.3.2.5-2: L1-RSRP absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 10.4.3.2.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.3.3 EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used

10.4.3.3.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement under CCA when DRX is not used. This test will partly verify the L1-RSRP measurement requirements in clause 10.4.3.0.1.1.

10.4.3.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR1 with a shared spectrum NR carrier, RRM measurements and UL with a shared spectrum NR carrier.

10.4.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.3.3.

10.4.3.3.4 Test description

There are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2), and FR1 SCell (Cell 3). Cell 2 and Cell 3 operate on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in Table A.6B.1-1. The test configurations and parameters for the Cell 2 and Cell 3 are given in Table 10.4.3.3.4.1-1 and Table 10.4.3.3.4.1-2 below respectively.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

10.4.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.3.3.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 10.4.3.3.4.1-2. Test environment parameters are given in Table 10.4.3.3.4.1-3.

Table 10.4.3.3.4.1-1: Supported test configurations for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used

Config	Description
10.4.3.3-1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.3.3-2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 10.4.3.3.4.1-2: General test parameters for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used

Parameter	Config	Unit	Value
Active PScell	1,2		Cell 2
Active Scell	1,2		Cell 3
RF Channel Number	1,2		1: Cell 2 2: Cell 3
DL CCA model	1,2		As specified in D.7.2.1
UL CCA model	1,2		As specified in D.7.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
$BW_{channel}$	1,2	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access

			SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		Off
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1,2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table 10.4.3.3.4.1-3: Test Environment parameters for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.3.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.4.3.3.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Table A.6B.1-1. Cell 2 is NR FR1 PSCell and Cell3 is the NR FR1 SCell. Cell 3 is the target for SSB based L1-RSRP measurements. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

10.4.3.3.4.2 Test procedure

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The CCA model (both DL and UL) is disabled (i.e. PCCA_DL_i= PCCA_UL=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 10.4.3.3.4.1-2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode On, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 10.4.3.3.4.1-2.

2. Set the parameters according to T1 in Table 10.4.3.3.5-1. The SS shall enable DL and UL CCA model according to Table 10.4.3.3.5-1. T1 starts.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 80 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 10.4.3.3.5-1. T2 starts.

5. The UE shall start sending L1-RSRP reports. The SS shall check following requirements:

   R1: the UE shall start to transmit valid reports no later than 682 ms from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 (Table 10.4.3.3.5-2) and the relative L1-RSRP requirement for SSB#0 in Table 10.4.3.3.5-3. If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 10.4.3.3.5-2 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   R4: The DIFF RSRP value of SSB#0 reported by the UE is compared to the expected DIFF RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 10.4.3.3.5-3 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. The SS waits until T2 expires.

7. The SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. The SS then shall transmit *RRCConnectionReconfiguration* message with condition MCG_and_SCG according to TS 36.508 [25] Table 4.6.1-8 to add NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message.

9. If any the reconfiguration fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

10.4.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.3.3.4.3-1: Common Exception messages for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10 Table H.3.4-1 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 10.4.3.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

10.4.3.3.5 Test requirement

Table 10.4.3.3.5-1 defines the primary level settings for all tests for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used.

Table 10.4.3.3.5-1: SSB specific test parameters for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1, 2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4,7	1, 2		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1, 2		1.0	1.0	1.0	1.0
N_{oc} Note2	1, 2	dBm/15kHz	-94.65			
N_{oc} Note2	1, 2	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1, 2	dB	0	0	-Infinity	3.5

SSB RSRP Note3	1, 2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.15
Io Note3	1, 2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1, 2	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in Table 10.4.3.3.5-2 and relative accuracy requirement in Table 10.4.3.3.5-3. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 3.

Table 10.4.3.3.5-2: L1-RSRP absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 10.4.3.3.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.3.4 EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used

10.4.3.4.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement under CCA when DRX is used. This test will partly verify the L1-RSRP measurement requirements in clause 10.4.3.0.1.1.

10.4.3.4.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR1 with a shared spectrum NR carrier, RRM measurements, UL with a shared spectrum NR carrier and long DRX cycle.

10.4.3.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.3.4.

10.4.3.4.4 Test description

There are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2), and FR1 SCell (Cell 3). Cell 2 and Cell 3 operate on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in Table A.6B.1-1. The test configurations and parameters for the Cell 2 are given in Table 10.4.3.4.4.1-1 and Table 10.4.3.4.4.1-2 below respectively.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

10.4.3.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.3.4.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 10.4.3.4.4.1-2. Test environment parameters are given in Table 10.4.3.4.4.1-3.

Table 10.4.3.2.4.1-1: Supported test configurations for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used

Config	Description
10.4.3.4-1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.3.4-2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 10.4.3.4.4.1-2: General test parameters for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used

Parameter	Config	Unit	Value
Active PScell	1,2		Cell 2
Active Scell	1,2		Cell 3
RF Channel Number	1,2		1: Cell 2 2: Cell 3
DL CCA model	1,2		As specified in D.7.2.1
UL CCA model	1,2		As specified in D.7.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
$BW_{channel}$	1,2	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access

			SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		DRX.3
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1,2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table 10.4.3.4.4.1-3: Test Environment parameters for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.3.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.4.3.4.4.3.

2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Table A.6B.1-1. Cell 2 is NR FR1 PSCell and Cell3 is the NR FR1 SCell. Cell 3 is the target for SSB based L1-RSRP measurements. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. DRX is configured as specified in Table 10.4.3.4.4.1-2.

10.4.3.4.4.2 Test procedure

Same test procedure as in subclause 10.4.3.3.4.2 with tables 10.4.3.3.4.1-2 and 10.4.3.3.5-1 replaced by tables 10.4.3.4.4.1-2 and 10.4.3.4.5-1.

10.4.3.4.4.3 Message contents

Same message content as in subclause 10.4.3.4.4.3 with the following exception:

Table 10.4.3.4.4.3-1: Common Exception messages for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3

10.4.3.4.5 Test requirement

Table 10.4.3.4.5-1 defines the primary level settings for all tests for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used.

Table 10.4.3.4.5-1: SSB specific test parameters for EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1, 2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4,7	1, 2		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1, 2		1.0	1.0	1.0	1.0
N_{oc} Note2	1, 2	dBm/15kHz	-94.65			
N_{oc} Note2	1, 2	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1, 2	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1, 2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.15
Io Note3	1, 2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1, 2	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in Table 10.4.3.4.5-2 and relative accuracy requirement in Table 10.4.3.4.5-3. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 3.

Table 10.4.3.4.5-2: L1-RSRP absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 10.4.3.4.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.4 E-UTRAN-NR inter-RAT measurements on NR carrier frequency under CCA

10.4.4.0 Minimum conformance requirements

10.4.4.0.1 Minimum conformance requitements for E-UTRAN FDD – NR measurements when CCA is used

Requirements in this clause shall apply for NR capable UE, when NR is in carrier frequencies with CCA and not configured with EN-DC.

The UE shall be able to identify new RAT E-UTRAN FDD-NR cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-RAT cells if carrier frequency information is provided by the PCell, even if no explicit neighbour list with physical layer cell identities is provided.

In the requirements of clause 10.4.4.0.1, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the *N* candidate SSB positions for the same SS/PBCH block index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding period, where:

- For the cell detection procedure: *N* is at least one candidate SSB position (NOTE: the one candidate SSB position for the cell detection shall not be impacted by the set of candidate SSB positions which are already being measured by the UE within the current measurement period of the on-going measurements), and

- For other procedures in clause 10.4.4.0.1: *N* are the first two successive candidate SSB positions when two or more candidate SSB positions are configured for this SSB index in one discovery burst transmission window, otherwise N is one candidate SSB position;

otherwise the SMTC occasion is considered as available at the UE.

The normative reference for this requirement is TS 36.133 [23] clause 8.1.2.4.21A.

10.4.4.0.1.1 Identification of a new NR cell

When measurement gaps are scheduled, the UE shall be able to identify a new detectable cell within $T_{identify_irat_cca_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise, UE shall be able to identify a new detectable inter-RAT frequency cell within $T_{identify_irat_cca_with_index}$. The UE shall be able to identify a new detectable inter-RAT frequency SSB of an already detected cell within $T_{identify_irat_cca_without_index}$.

$$T_{identify_irat_cca_without_index} = (T_{PSS/SSS_sync_irat_cca} + T_{SSB_measurement_period_irat_cca})\ ms$$

$$T_{identify_irat_cca_with_index} = (T_{PSS/SSS_sync_irat_cca} + T_{SSB_measurement_period_irat_cca} + T_{SSB_time_index_irat_cca})\ ms$$

Where:

$T_{PSS/SSS_sync_irat_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.4.0.1.1-1.

$T_{SSB_time_index_irat_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 10.4.4.0.1.1-2.

$T_{SSB_measurement_period_irat_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.4.0.1.1-3.

N_{freq} is defined in TS 36.133 [23] clause 8.1.2.1.1.

Table 10.4.4.0.1.1-1: Time period for PSS/SSS detection, in NR carrier frequencies with CCA

Condition NOTE1,2,3,4	$T_{PSS/SSS_sync_irat_cca}$
No DRX	Max(600ms, (8 +$L_{PSS/SSS,gaps}$) × Max(MGRP, SMTC period)) × N_{freq}
DRX cycle ≤ 320ms	Max(600ms, Ceil((8+$L_{PSS/SSS,gaps}$) ×1.5) × Max(MGRP, SMTC period, DRX cycle)) × N_{freq}
DRX cycle > 320ms	(8+$L_{PSS/SSS,gaps}$) × DRX cycle × N_{freq}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 5.	
NOTE 2: $L_{PSS/SSS,gaps}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_irat_cca}$, where $L_{PSS/SSS,gaps} \le L_{PSS/SSS,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP.	
NOTE 3: $L_{PSS/SSS,gaps}$ = 12 for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms $L_{PSS/SSS,gaps}$ = 8 for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{PSS/SSS,gaps}$ = 5 for DRX cycle > 320 ms.	

Upon exceeding $L_{PSS/SSS,gaps,max}$, the UE is not required to meet the corresponding PSS/SSS detection requirement. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

Table 10.4.4.0.1.1-2: Time period for time index detection, in NR carrier frequencies with CCA

Condition NOTE1,2,3,4	$T_{SSB_time_index_irat_cca}$
No DRX	Max(120ms, (3 + $L_{ind,gaps}$) × Max(MGRP, SMTC period)) × N_{freq}
DRX cycle ≤ 320ms	Max(120ms, ceil((3+ $L_{ind,gaps}$) x 1.5) × Max(MGRP, SMTC period, DRX cycle)) × N_{freq}
DRX cycle > 320ms	(3+ $L_{ind,gaps}$) × DRX cycle × N_{freq}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 5	
NOTE 2: $L_{ind,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_irat_cca}$, where $L_{ind,gaps} \le L_{ind,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP.	
NOTE 3: $L_{ind,gaps,max}$ = 5 for Max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{ind,gaps,max}$ = 3 for Max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{ind,gaps,max}$ = 2 for DRX cycle > 320 ms.	

The UE shall restart the time index detection upon exceeding $L_{ind,gaps,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

In the requirements, an NR cell is considered to be detectable when:

- NR SS-RSRP related conditions in the accuracy requirements in Section TBD are fulfilled for a corresponding Band, together with the corresponding side conditions in TBD of TS 38.133 [6],
- NR SS-RSRQ related conditions in the accuracy requirements in Section TBD are fulfilled for a corresponding Band, together with the corresponding side conditions in TBD of TS 38.133 [6],
- NR SS-SINR related conditions in the accuracy requirements in Section TBD are fulfilled for a corresponding Band, together with the corresponding side conditions in TBD of TS 38.133 [6].

When measurement gaps are scheduled for NR measurements the UE physical layer shall be capable of reporting NR SS-RSRP, SS-RSRQ, and SS-SINR measurements to higher layers with measurement accuracy as specified in clause TBD, with measurement period as shown in table 10.4.4.0.1.1-3:

Table 10.4.4.0.1.1-3: Measurement period for inter-RAT measurements

Condition NOTE1,2,3,4	$T_{SSB_measurement_period_irat_cca}$
No DRX	$Max(200ms, (8+ L_{meas}) \times Max(MGRP, SMTC\ period)) \times N_{freq}$
DRX cycle ≤ 320ms	$Max(200ms, ceil((8+ L_{meas}) \times 1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times N_{freq}$
DRX cycle > 320ms	$(8+ L_{meas}) \times DRX\ cycle \times N_{freq}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 5 NOTE 3: L_{meas} is the number of SMTC occasions not available at the UE during $T_{SSB_measurement_period_irat_cca}$, where $L_{meas} \le L_{meas,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. NOTE 4: $L_{meas,max}$ = 12 for Max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{meas,max}$ = 8 for Max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{meas,max}$ = 5 for DRX cycle > 320 ms.	

The UE shall restart the measurement upon exceeding $L_{meas,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

When the time period of unsuccessful measurement attemps due to exceeding the maximum number of unavailable at the UE SMTC occasions of an already identified cell exceeds the maximum time requirement for the cell to remain known defined in clause TS 36.133 [23] 9.3A.6.3, the UE shall stop the measurement attempts on this SSB and perform the detection procedure again, like for any other SSB.

The UE shall be capable of performing SSB based SS-RSRP, SS-RSRQ, and SS-SINR for up to [7] NR carrier frequencies.

For each RAT E-UTRAN FDD-NR layer on, in carrier frequencies with CCA, the UE shall be capable of monitoring at least 4 cells.

For each RAT E-UTRAN FDD-NR layer in carrier frequencies with CCA, during each layer 1 measurement period, the UE shall be capable of monitoring at least 7 SSBs with different SSB indexes and/or PCI on the RAT E-UTRAN FDD-NR layer.

The NR SS-RSRP measurement accuracy for all measured cells shall be as specified in clause TBD. The NR SS-RSRQ measurement accuracy for all measured cells shall be as specified in clause TBD. The NR SS-SINR measurement accuracy for all measured cells shall be as specified in clause TBD.

The normative reference for this requirement is TS 36.133 [23] clause 8.1.2.4.21A.1.1.

10.4.4.0.1.2 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in TS 36.133 [23] clause 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report and all delays due to UL CCA failures until the successful transmission of the report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify_irat_cca_without_index}$ or $T_{identify_irat_cca_with_index}$ defined in Clause 10.4.4.0.1.1 for the minimum requirements. When L3 filtering is used or IDC autonomous denial or the UE is performing reception and/or transmission for ProSe Direct Discovery and/or ProSe Direct Communication, or the UE is configured to perform SRS carrier based switching, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_irat_cca_without_index}$ or $T_{identify_irat_cca_with_index}$ defined in clause 10.4.4.0.1.1 for the minimum requirements and then triggers the measurement report as per TS 36.331 [29], the event triggered measurement reporting delay shall be less than $T_{measurement_NR_cca_FDD}$ defined in clause 10.4.4.0.1.1 provided the timing to that cell has not changed more than ±3200 Tc while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used or IDC autonomous denial is configured or the UE is performing reception and/or transmission for ProSe Direct Discovery and/or ProSe Direct Communication, or the UE is configured to perform SRS carrier based switching, an additional delay can be expected.

The normative reference for this requirement is TS 36.133 [23] clause 8.1.2.4.21A.1.3.

10.4.4.0.2 Minimum conformance requitements for E-UTRAN TDD – NR measurements when CCA is used

Requirements in this clause shall apply for NR capable UE when not configured with EN-DC, considering NR carrier frequencies with CCA.

The requirements in clause 10.4.4.0.1 also apply for this section.

The normative reference for this requirement is TS 36.133 [23] clause 8.1.2.4.22A.

10.4.4.1 EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

10.4.4.1.1 Test purpose

The purpose of the test is to verify that the UE makes correct reporting of an event in non-DRX without SSB time index detection. This test will partly verify the NR inter-RAT cell search requirements in clause 10.4.4.0.1 for E-UTRAN FDD-NR measurements under CCA and clause 10.4.4.0.2 for E-UTRAN TDD-NR measurements under CCA.

10.4.4.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR1 with a shared spectrum NR carrier and supporting inter-RAT and RRM measurements on shared channel access.

10.4.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.4.1.

10.4.4.1.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test configurations and parameters are given in Tables 10.4.4.1.4.1-1, 10.4.4.1.4.1-3, 10.4.4.1.5-1 and 10.4.4.1.5-2. Cell transmits SSBs in DBT windows according to DL CCA model.

In test 1, measurement gap pattern configuration # 0 as defined in Table 10.4.4.1.4.1-3 is provided for a UE that does not support per-FR gap.

10.4.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.4.1.4.1-1.

Table 10.4.4.1.4.1-1: Supported test configurations for EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

Config	Description
10.4.4.1-1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.4.1-2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.4.4.1.4.1-2.

Table 10.4.4.1.4.1-2: Initial conditions for EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.4.1.4.1-3.
2. Message contents are defined in clause 10.4.4.1.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.4.1.4.1-3: General test parameters for EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2	1	One E-UTRAcarrier frequency is used.
NR RF Chanel Number		1, 2	1,2	Two FR1 NR carrier frequency under CCA is used.

DL CCA model	Dynamic channel access Note 3, 5			As specified in clause D.7.2.1	
	Semi-static channel access Note 4, 5				
UL CCA model	Dynamic channel access Note 3, 5			As specified in clause D.7.2.2	
	Semi-static channel access Note 4, 5				
L_{CCA_DL}			1, 2	12	
W_{CCA_DL}		ms	1, 2	$T_{PSS/SSS_sync_irat_cca}$	
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			1, 2	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id			1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset			1, 2	39	As specified in TS 36.331 [29].
b2-Threshold1		dBm	1, 2	Note 1	E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [29]
b2-Threshold2NR		dBm	1, 2	Note 2	SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 3 for event B2 [29]
Hysteresis		dB	1, 2	0	
CP length			1, 2	Normal	
TimeToTrigger		s	1, 2	0	
Filter coefficient			1, 2	0	L3 filtering is not used
DRX			1, 2	OFF	DRX is not used
Time offset between serving and neighbour cells			1, 2	3μs	Synchronous cells.
T1		s	1, 2	5	
T2		s	1, 2	$\geq T_{identify_irat_cca_without_index}$	Tidentify_irat_cca_without_index¬ is defined in clause 10.4.4.0.1 and 10.4.4.0.2

NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.1.1-3
NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.1.1-4
NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

10.4.4.1.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The UE is tested when *MeasTriggerQuantity* is configured as RSRP, RSRQ and SINR for each test. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}= P_{CCA_UL}=1$) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of Cell 1 and Cell 2 according to T1 in Tables 10.4.4.1.5-1 and 10.4.4.1.5-2 respectively.
3. The SS shall transmit an *RRCConnectionReconfiguration* message with event B2 configured on Cell 1.
4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 10.4.4.1.5-1. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Tables 10.4.4.1.5-1 and 10.4.4.1.5-2. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 1602 ms for Test1, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).
8. The SS shall transmit an *RRCConnectionRelease* message to release the RRC connection on Cell 1 which includes the release of the established radio bearers as well as all radio resources.
9. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
10. The SS:
    - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or
    - switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
11. Repeat step 1-10 until the confidence level according to Annex G clause G.2.7 is achieved.

10.4.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.4.1.4.3-1: Common Exception messages for EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-3 Table H.3.4-4 with Condition gapUE (Test 1) Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 for Test 1 Table H.3.4-5 with Condition Pattern #0 and gap offset = 39 (Test 1) Table H.3.4-7 with Condition Inter-RAT and EVENT B2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access
Specific message contents exceptions for Test Configuration 10.4.4.1-1 and 10.4.4.1-2	Table H.3.4-6 with Conditions SMTC.1 and Synchronous cells

10.4.4.1.5 Test requirements

Tables 10.4.4.1.5-1 and 10.4.4.1.5-2 define the primary level settings for all tests for EN-DC FR1-FR1 Event-triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is not used.

Table 10.4.4.1.5-1: E-UTRAN PCell specific test parameters for EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2	17	17
RSRP[Note5]	dBm/15kHz	1, 2	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2	-87	-87
Io[Note5]	dBm/9MHz	1, 2	-59.13	-59.13
Propagation Condition [Note6]		1, 2	ETU70	
Antenna Configuration and Correlation Matrix [Note6]		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 10.4.4.1.5-2: NR neighbour cell specific test parameters for EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 6,8		1, 2	1		1	
P_{CCA_UL} for semi-static channel access Note 7,8		1, 2	1		1	
OCNG Patterns		1, 2	OP.1		OP.1	
SMTC configuration		1, 2	SMTC.1		SMTC.1	
DBT window configuration		1, 2	DBT.1		DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA		SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA		SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30		30	
b2-Threshold2NR	dBm	1, 2	NA		-98	
EPRE ratio of PSS to SSS		1, 2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	1, 2	-98		-98	
N_{oc} Note2	dBm/SCS	1, 2	-95		-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	4	4	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	ETU70		ETU70	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, the UE is not required to report SSB time index. $T_{identify_irat_cca_without_index}$ is defined in clause 10.4.4.0.1 and 10.4.4.0.2.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.4.2 EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

10.4.4.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in DRX without SSB time index detection. This test will partly verify the NR inter-RAT cell search requirements in clause 10.4.4.0.1 for E-UTRAN FDD-NR measurements under CCA and clause 10.4.4.0.2 for E-UTRAN TDD-NR measurements under CCA.

10.4.4.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR1 with a shared spectrum NR carrier, inter-RAT and RRM measurements on shared channel access and long DRX cycle.

10.4.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.4.2.

10.4.4.2.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test configurations and parameters are given in Tables 10.4.4.2.4.1-1, 10.4.4.2.4.1-3, 10.4.4.2.5-1 and 10.4.4.2.5-2. Cell transmits SSBs in DBT windows according to DL CCA model.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table 10.4.4.2.4.1-3 is provided for UE that does not support per-FR gap.

10.4.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.4.2.4.1-1.

Table 10.4.4.2.4.1-1: Supported test configurations for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used

Config	Description
10.4.4.2-1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.4.2-2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.4.4.2.4.1-2.

Table 10.4.4.2.4.1-2: Initial conditions for EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.4.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.4.2.4.1-3.
2. Message contents are defined in clause 10.4.4.2.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.4.2.4.1-3: General test parameters for EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

Parameter		Unit	Test configuration	Value		Comment
				Test 1	Test 2	
E-UTRA RF Channel Number			1, 2	1		One E-UTRAcarrier frequency is used.
NR RF Chanel Number			1, 2	1,2		Two FR1 NR carrier frequency under CCA is used.
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
DL CCA model	Dynamic channel access Note 3, 5			As specified in clause D.7.2.1		
	Semi-static channel access Note 4, 5					

UL CCA model	Dynamic channel access Note 3, 5			As specified in clause D.7.2.2		
	Semi-static channel access Note 4, 5					
L_{CCA_DL}			1, 2	12	5	
W_{CCA_DL}		ms	1, 2	$T_{PSS/SSS_sync_irat_cca}$		
Neighbour cell			1, 2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id			1, 2	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset			1, 2	39		As specified in TS 36.331 [29].
b2-Threshold1		dBm	1, 2	Note 1		E-UTRA RSRP threshold for measurement on cell 1 for event B2 [29]
b2-Threshold2NR		dBm	1, 2	Note 2		SS-RSRP threshold measurement on cell 3 for event B2 [29]
Hysteresis		dB	1, 2	0		
CP length			1, 2	Normal		
TimeToTrigger		s	1, 2	0		
Filter coefficient			1, 2	0		L3 filtering is not used
DRX			1, 2	DRX.9	DRX.12	As specified in clause H3.7-2
Time offset between serving and neighbour cells			1, 2	3µs		Synchronous cells.
T1		s	1, 2	5		
T2		s	1, 2	$\geq T_{identify_irat_cca_without_index}$		$T_{identify_irat_cca_without_index}$ is defined in clause 10.4.4.0.1 and 10.4.4.0.2

NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.1.1-3
NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.1.1-4
NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

10.4.4.2.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [29] is used. The UE is tested when *MeasTriggerQuantity* is configured as RSRP, RSRQ and SINR for each test. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}= P_{CCA_UL}=1$) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of Cell 1 and Cell 2 according to T1 in Tables 10.4.4.2.5-1 and 10.4.4.2.5-2 respectively.

3. The SS shall transmit an *RRCConnectionReconfiguration* message with event B2 configured on Cell 1.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Tables 10.4.4.2.5-1 and 10.4.4.2.5-2. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Tables 10.4.4.2.5-1 and 10.4.4.2.5-2. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 2402 ms for Test 1 or 16642 ms for Test2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. The SS shall transmit an *RRCConnectionRelease* message to release the RRC connection on Cell 1 which includes the release of the established radio bearers as well as all radio resources.

9. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

10. The SS:

    - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or

    - switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

11. Repeat step 1-10 until the confidence level according to Annex G clause G.2.7 is achieved.

12. Repeat steps 1-11 for each Test in Tables 10.4.4.2.4.1-3, 10.4.4.2.5-1 and 10.4.4.2.5-2 as appropriate.

10.4.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.4.2.4.3-1: Common Exception messages for EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-3 Table H.3.4-4 with Condition gapUE (Test 1, Test 2 Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 for Test 1 and 2 Table H.3.4-5 with Condition Pattern #0 and gap offset = 39 (Test 1, Test 2) Table H.3.4-7 with Condition Inter-RAT and EVENT B2 Table H.3.7-2 with Condition DRX.9 and Gap for Test 1 Table H.3.7-2 with Condition DRX.12 and Gap for Test 2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access
Specific message contents exceptions for Test Configuration 10.4.4.2-1 and 10.4.4.2-2	Table H.3.4-6 with Conditions SMTC.1 and Synchronous cells

10.4.4.2.5 Test requirements

Tables 10.4.4.2.5-1 and 10.4.4.2.5-2 define the primary level settings for all tests for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA without SSB time index detection when DRX is used.

Table 10.4.4.2.5-1: E-UTRAN PCell specific test parameters for EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	

Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2	17	17
RSRP[Note5]	dBm/15kHz	1, 2	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2	-87	-87
Io[Note5]	dBm/9MHz	1, 2	-59.13	-59.13
Propagation Condition [Note6]		1, 2	ETU70	
Antenna Configuration and Correlation Matrix [Note6]		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 10.4.4.2.5-2: NR neighbor cell specific test parameters for EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 6,8		1, 2	1		1	
P_{CCA_UL} for semi-static channel access Note 7,8		1, 2	1		1	
OCNG Patterns		1, 2	OP.1		OP.1	
SMTC configuration		1, 2	SMTC.1		SMTC.1	
DBT window configuration		1, 2	DBT.1		DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA		SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA		SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30		30	
b2-Threshold2NR	dBm	1, 2	NA		-98	
EPRE ratio of PSS to SSS		1, 2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	1, 2	-98		-98	
N_{oc} Note2	dBm/SCS	1, 2	-95		-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	4	4	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	ETU70		ETU70	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.4.3 EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

10.4.4.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in non-DRX with SSB time index detection. This test will partly verify the NR inter-RAT cell search requirements in clause 10.4.4.0.1 for E-UTRAN FDD-NR measurements under CCA and clause 10.4.4.0.2 for E-UTRAN TDD-NR measurements under CCA.

10.4.4.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR1 with a shared spectrum NR carrier, supporting inter-RAT and RRM measurements on shared channel access.

10.4.4.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.4.3.

10.4.4.3.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test configurations and parameters are given in Tables 10.4.4.3.4.1-1, 10.4.4.3.4.1-3, 10.4.4.3.5-1 and 10.4.4.3.5-2. Cell transmits SSBs in DBT windows according to DL CCA model.

In test 1 measurement gap pattern configuration # 0 as defined in Table 10.4.4.3.4.1-3 is provided for UE that does not support per-FR gap

10.4.4.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.4.3.4.1-1.

Table 10.4.4.3.4.1-1: Supported test configurations for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

Config	Description
10.4.4.3-1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.4.3-2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.4.4.3.4.1-2.

Table 10.4.4.3.4.1-2: Initial conditions for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.4.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 10.4.4.3.4.1-3.
2. Message contents are defined in clause 10.4.4.3.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.4.3.4.1-3: General test parameters for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

Parameter		Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number			1, 2	1	One E-UTRAcarrier frequency is used.
NR RF Chanel Number			1, 2	1,2	Two FR1 NR carrier frequency under CCA is used.
DL CCA model	Dynamic channel access[Note 3, 5]			As specified in clause D.7.2.1	
	Semi-static channel access [Note 4, 5]				
UL CCA model	Dynamic channel access[Note 3, 5]			As specified in clause D.7.2.2	

	Semi-static channel access Note 4, 5				
L_{CCA_DL}			1, 2	12	
W_{CCA_DL}		ms	1, 2	$T_{PSS/SSS_sync_irat_cca}$	
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			1, 2	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id			1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset			1, 2	39	As specified in TS 36.331 [29].
b2-Threshold1		dBm	1, 2	Note 1	E-UTRA RSRP threshold for measurement on cell 1 for event B2 [29]
b2-Threshold2NR		dBm	1, 2	Note 2	SS-RSRP threshold measurement on cell 3 for event B2 [29]
Hysteresis		dB	1, 2	0	
CP length			1, 2	Normal	
TimeToTrigger		s	1, 2	0	
Filter coefficient			1, 2	0	L3 filtering is not used
DRX			1, 2	OFF	DRX is not used
Time offset between serving and neighbour cells			1, 2	3μs	Synchronous cells.
T1		s	1, 2	5	
T2		s	1, 2	≥ $T_{identify_irat_cca_with_index}$	$T_{identify_irat_cca_with_index}$ is defined in clause 10.4.4.0.1 and 10.4.4.0.2

NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.3.1-3
NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.3.1-4
NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

10.4.4.3.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [29] is used. The UE is tested when *MeasTriggerQuantity* is configured as RSRP, RSRQ and SINR for each test. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of Cell 1 and Cell 2 according to T1 in Tables 10.4.4.3.5-1 and 10.4.4.3.5-2 respectively.

3. The SS shall transmit an *RRCConnectionReconfiguration* message with event B2 configured on Cell 1.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Tables 10.4.4.3.5-1 and 10.4.4.3.5-2. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Tables 10.4.4.3.5-1 and 10.4.4.3.5-2. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 1922 ms for Test1, then the number of successful tests is increased by

one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. The SS shall transmit an *RRCConnectionRelease* message to release the RRC connection on Cell 1 which includes the release of the established radio bearers as well as all radio resources.

9. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

10. The The SS:

    - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or

    - switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

11. Repeat step 1-10 until the confidence level according to Annex G clause G.2.7 is achieved.

10.4.4.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.4.3.4.3-1: Common Exception messages for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-3 Table H.3.4-4 with Condition gapUE (Test 1) Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 for Test 1 Table H.3.4-5 with Condition Pattern #0 and gap offset = 39 (Test 1) Table H.3.4-7 with Condition Inter-RAT and EVENT B2 Table H.3.4-8 with Condition SSB-Index Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access
Specific message contents exceptions for Test Configuration 10.4.4.3-1 and 10.4.4.3-2	Table H.3.4-6 with Conditions SMTC.1 and Synchronous cells

10.4.4.3.5 Test requirements

Table 10.4.4.3.5-1 and 10.4.4.3.5-2 define the primary level settings for all tests for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used.

Table 10.4.4.3.5-1: E-UTRAN PCell specific test parameters for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25	

			10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel Note2		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel Note2		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns Note2		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
b2-Threshold1	dBm	1, 2	-77
PBCH_RA	dB	1, 2	0
PBCH_RB			
PSS_RA			
SSS_RA			
PCFICH_RB			
PHICH_RA			
PHICH_RB			
PDCCH_RA			
PDCCH_RB			
PDSCH_RA			
PDSCH_RB			
OCNG_RA Note3			
OCNG_RB Note3			
N_{oc} Note4	dBm/15kHz	1, 2	-104
$\hat{E}_s/N_{oc}$	dB	1, 2	17 | 17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2	17 | 17
RSRP Note5	dBm/15kHz	1, 2	-87 | -87
SCH_RP Note5	dBm/15kHz	1, 2	-87 | -87
Io Note5	dBm/9MHz	1, 2	-59.13 | -59.13
Propagation Condition Note6		1, 2	ETU70
Antenna Configuration and Correlation Matrix Note6		1, 2	1x2 Low

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 10.4.4.3.5-2: NR neighbor cell specific test parameters for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T2	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	

P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 6,8		1, 2	1		1	
P_{CCA_UL} for semi-static channel access Note 7,8		1, 2	1		1	
OCNG Patterns		1, 2	OP.1		OP.1	
SMTC configuration		1, 2	SMTC.1		SMTC.1	
DBT window configuration		1, 2	DBT.1		DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA		SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA		SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30		30	
b2-Threshold2NR	dBm	1, 2	NA		-98	
EPRE ratio of PSS to SSS		1, 2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	1, 2	-98		-98	
N_{oc} Note2	dBm/SCS	1, 2	-95		-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	4	4	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	ETU70		ETU70	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.4.4.4 EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

10.4.4.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in DRX with SSB time index detection. This test will partly verify the NR inter-RAT cell search requirements in clause 10.4.4.0.1 for E-UTRAN FDD-NR measurements under CCA and clause 10.4.4.0.2 for E-UTRAN TDD-NR measurements under CCA.

10.4.4.4.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR1 with a shared spectrum NR carrier, supporting inter-RAT and RRM measurements on shared channel access and long DRX cycle.

10.4.4.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.4.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.4.4.4.

10.4.4.4.4 Test description

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test configurations and parameters are given in Tables 10.4.4.4.4.1-1, 10.4.4.4.4.1-3, 10.4.4.4.5-1 and 10.4.4.4.5-2. Cell transmits SSBs in DBT windows according to DL CCA model.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table 10.4.4.4.4.1-3 is provided for UE that does not support per-FR gap.

10.4.4.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.4.4.4.4.1-1.

Table 10.4.4.4.4.1-1: Supported test configurations for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

Config	Description
10.4.4.4-1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.4.4.4-2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 10.4.4.4.4.1-2.

Table 10.4.4.4.4.1-2: Initial conditions for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.4.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part	

1. The general test parameter settings are set up according to Table 10.4.4.4.4.1-3.
2. Message contents are defined in clause 10.4.4.4.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are NR cells (PSCell and neighbour cell, respectively) in different frequencies with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 10.4.4.4.4.1-3: General test parameters for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

Parameter		Unit	Test configuration	Value		Comment
				Test 1	Test 2	
E-UTRA RF Channel Number			1, 2	1		One E-UTRAcarrier frequency is used.
NR RF Chanel Number			1, 2	1,2		Two FR1 NR carrier frequency under CCA is used.
DL CCA model	Dynamic channel access Note 3, 5			As specified in clause D.7.2.1		
	Semi-static channel access Note 4, 5					
UL CCA model	Dynamic channel access Note 3, 5			As specified in clause D.7.2.2		
	Semi-static channel access Note 4, 5					
L_{CCA_DL}			1, 2	12	5	
W_{CCA_DL}		ms	1, 2	$T_{PSS/SSS_sync_irat_cca}$		
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			1, 2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id			1, 2	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset			1, 2	39		As specified in TS 36.331 [29].
b2-Threshold1		dBm	1, 2	Note 1		E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [29]
b2-Threshold2NR		dBm	1, 2	Note 2		SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 3 for event B2 [29]
Hysteresis		dB	1, 2	0		
CP length			1, 2	Normal		
TimeToTrigger		s	1, 2	0		
Filter coefficient			1, 2	0		L3 filtering is not used
DRX			1, 2	DRX.9	DRX.12	As specified in clause A.3.3

Time offset between serving and neighbour cells		1, 2	3μs	Synchronous cells.
T1	s	1, 2	5	
T2	s	1, 2	≥$T_{identify_irat_cca_with_index}$	$T_{identify_irat_cca_with_index}$ is defined in clause 10.4.4.0.1 and 10.4.4.0.2
NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.4.1-3 NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.4.1-4 NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

10.4.4.4.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [29] is used. The UE is tested when *MeasTriggerQuantity* is configured as RSRP, RSRQ and SINR for each test. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters of Cell 1 and Cell 2 according to T1 in Tables 10.4.4.4.5-1 and 10.4.4.4.5-2 respectively.

3. The SS shall transmit an *RRCConnectionReconfiguration* message with event B2 configured on Cell 1.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Tables 10.4.4.4.5-1 and 10.4.4.4.5-2. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Tables 10.4.4.4.5-1 and 10.4.4.4.5-2. T2 starts.

. UE shall transmit a *MeasurementReport* message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 2882 ms for Test 1 or 19842 ms for Test2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCConnectionReconfiguration* message with condition EN-DC_PSCell_Rel according to TS 36.508 [25] Table 4.6.1-8 to release NR cell (PSCell). The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. The SS shall transmit an *RRCConnectionRelease* message to release the RRC connection on Cell 1 which includes the release of the established radio bearers as well as all radio resources.

9. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

10. The The SS:

    - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or

    - switches on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

11. Repeat step 1-10 until the confidence level according to Annex G clause G.2.7 is achieved.

12. Repeat steps 1-11 for each Test in Tables 10.4.4.4.4.1-3, 10.4.4.4.5-1 and 10.4.4.4.5-2 as appropriate.

10.4.4.42.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.4.4.4.4.3-1: Common Exception messages for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-3 Table H.3.4-4 with Condition gapUE (Test 1, Test 2 Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 for Test 1 and 2 Table H.3.4-5 with Condition Pattern #0 and gap offset = 39 (Test 1, Test 2 Table H.3.4-7 with Condition Inter-RAT and EVENT B2 Table H.3.7-2 with Condition DRX.9 and Gap for Test 1 Table H.3.7-2 with Condition DRX.12 and Gap for Test 2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access
Specific message contents exceptions for Test Configuration 10.4.4.4-1 and 10.4.4.4-2	Table H.3.4-6 with Conditions SMTC.1 and Synchronous cells

10.4.4.4.5 Test requirements

Table 10.4.4.4.5-1 and 10.4.4.4.5-2 define the primary level settings for all tests for EN-DC FR1-FR1 Event triggered reporting for FR1 cell with CCA with SSB time index detection when DRX is used.

Table 10.4.4.4.5-1: E-UTRAN PCell specific test parameters for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	

		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note3				
OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2	17	17
RSRP Note5	dBm/15kHz	1, 2	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2	-87	-87
Io Note5	dBm/9MHz	1, 2	-59.13	-59.13
Propagation Condition Note6		1, 2	ETU70	
Antenna Configuration and Correlation Matrix Note6		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table 10.4.4.4.5-2: NR neighbor cell specific test parameters for EN-DC FR1 E-UTRA-NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T2	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 6,8		1, 2	1		1	
P_{CCA_UL} for semi-static channel access Note 7,8		1, 2	1		1	
OCNG Patterns		1, 2	OP.1		OP.1	
SMTC configuration		1, 2	SMTC.1		SMTC.1	
DBT window configuration		1, 2	DBT.1		DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA		SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA		SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30		30	
b2-Threshold2NR	dBm	1, 2	NA		-98	
EPRE ratio of PSS to SSS		1, 2	0		0	

EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	1, 2	-98		-98	
N_{oc} Note2	dBm/SCS	1, 2	-95		-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	4	4	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	ETU70		ETU70	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

In In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

10.5 Measurement Performance

10.5.1 SS-RSRP

10.5.1.0 Minimum Conformance Requirements

10.5.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements under CCA

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell under CCA.

The accuracy requirements in Table 10.5.1.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.8 for a corresponding Band for each relevant SSB.

Table 10.5.1.0.1-1: SS-RSRP intra-frequency absolute accuracy

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 2]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.5	±9	≥-6	NR_CCA_FR1_I	-117	-114	N/A	-70
			NR_CCA_FR1_J	-116.5	-113.5		
±8	±11	≥-6	NR_CCA_FR1_I	N/A	N/A	-70	-50
			NR_CCA_FR1_J				
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups are as defined in clause 3A.4.1.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.36.1.1.

10.5.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements under CCA

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell under CCA.

The accuracy requirements in Table 10.5.1.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.8 for a corresponding Band for each relevant SSB.

Table 10.5.1.0.2-1: SS-RSRP intra-frequency relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot [Note 2]	Io [Note 1] range				
			NR operating band groups [Note 4]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±2	±3	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±3	±3	≥-6	Note 3	Note 3	Note 3	N/A	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.							

NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups are as defined in clause 3A.4.1.

The normative reference for this requirement is TS 38.133 [6] clause 10.1.36.1.2.

10.5.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements under CCA

The requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency under CCA that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.5.1.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.9 for a corresponding Band for each relevant SSB.

Table 10.5.1.0.3-1: SS-RSRP inter-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 2]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.5	±9	≥-6	NR_CCA_FR1_I	-117	-114	N/A	-70
			NR_CCA_FR1_J	-116.5	-113.5		
±8	±11	≥-6	NR_CCA_FR1_I	N/A	N/A	-70	-50
			NR_CCA_FR1_J				

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups are as defined in clause 3A.4.1.

The normative reference for this requirement is TS 38.133 [6] clause 10.1.37.1.1.

10.5.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements under CCA

The relative accuracy of SS-RSRP in inter frequency case is defined as the RSRP measured from one cell on a frequency compared to the RSRP measured from another cell on a different frequency, with at least one of the two frequencies being under CCA.

The accuracy requirements in Table 10.5.1.0.4-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.9 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- $|Channel\ 1_Io - Channel\ 2_Io| \leq 20$ dB

Table 10.5.1.0.4-1: SS-RSRP inter-frequency relative accuracy under CCA

Accuracy		Conditions	
Normal condition	Extreme condition	SSB Ês/Iot [Note 2]	Io [Note 1] range

			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.5	±6	≥-6	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: NR operating band groups are as defined in clause 3A.4.1.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.37.1.2.

10.5.1.1 EN-DC FR1 intra-frequency SS-RSRP measurement accuracy on a CCA serving cell

10.5.1.1.1 Test purpose

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.5.1.0.1 and 10.5.1.0.2 when the serving cell is subject to CCA.

10.5.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and RRM measurements in dynamic channel access or in semi-static channel access.

10.5.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 10.5.1.0.1 and 10.5.1.0.2 for absolute and relative accuracy, correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.1.1.

10.5.1.1.4 Test description

Supported test configurations are shown in Table 10.5.1.1.4.1-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in Table 10.5.1.1.5-1. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.6B. In all test cases, Cell 2 is the PSCell, and Cell 3 is the target cell.

10.5.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.1.1.4.1-1.

Table 10.5.1.1.4.1-1: Supported test configurations for EN-DC FR1 intra-frequency SS-RSRP measurement accuracy on a CCA serving cell

Configuration	Description
10.5.1.1-1	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.5.1.1-2	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 10.5.1.1.4.1-2.

Table 10.5.1.1.4.1-2: Initial conditions for EN-DC FR1 intra-frequency SS-RSRP measurement accuracy on a CCA serving cell

Parameter	Value	Comment

Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 10.5.1.1.5-1.
2. Message contents are defined in clause 10.5.1.1.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

10.5.1.1.4.2 Test procedure

In this set of test cases there are three cells, E-UTRAN PCell (Cell 1), FR1 PSCell under CCA (Cell 2), and target neighbour FR1 Cell 3. Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 10.5.1.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform intra-frequency measurements as specified in section 10.5.1.1.4.3.
4. The UE shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 10.5.1.1.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the SS-RSRP reported values in the periodic *MeasurementReport*. The SS-RSRP value of Cell 3 reported by the UE is compared to the expected SS-RSRP. If the value is outside the limits in Table 10.5.1.1.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
8. Repeat steps 2-7 for each subtest defined in Table 10.5.1.1.5-1.

10.5.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.1.1.4.3-1: Common Exception messages for EN-DC FR1 intra-frequency SS-RSRP measurement accuracy on a CCA serving cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 10.5.1.1.4.3-2: *ReportConfigNR* for EN-DC FR1 intra-frequency SS-RSRP measurement accuracy on a CCA serving cell

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

10.5.1.1.5 Test requirements

Table 10.5.1.1.5-1 defines the primary level settings including test tolerances for EN-DC FR1 intra-frequency SS-RSRP measurement accuracy on a CCA serving cell. Table 10.5.1.1.5-2 and Table 10.5.1.1.5-3 define the absolute and relative accuracy requirements, correspondingly.

Table 10.5.1.1.5-1: Cell specific test parameters for EN-DC FR1 intra-frequency SS-RSRP measurement accuracy on a CCA serving cell

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0
SSB ARFCN			freq1			
Duplex mode	Config 1, 2		TDD			
TDD configuration	Config 1, 2		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1, 2	MHz	40: $N_{RB,c}$ = 106			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TRS configuration	Config 1, 2		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 CCA		CR.1.1 CCA	
Control Channel RMC	Config 1, 2		CCR.1.1 CCA		CCR.1.1 CCA	

DL CCA model				As specified in clause D.7.2.1			
UL CCA model				As specified in clause D.7.2.2			
P_{CCA_DL} for dynamic channel access Note 7,8		Config 1, 2		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75
P_{CCA_DL} for semi-static channel access Note 6.8		Config 1, 2		P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375
P_{CCA_UL}		Config 1, 2		1	1	1	1
SSB configuration	Semi-static channel access	Config 1, 2		SSB.1 CCA (As defined in A.3A.1)	SSB.1 CCA (As defined in A.3A.1)	SSB.1 CCA (As defined in A.3A.1)	SSB.1 CCA (As defined in A.3A.1)
	Dynamic channel access			SSB.2 CCA (As defined in A.3A.1)	SSB.2 CCA (As defined in A.3A.1)	SSB.2 CCA (As defined in A.3A.1)	SSB.2 CCA (As defined in A.3A.1)
Time offset with Cell 2		Config 1, 2	μs	-	3	-	3
SMTC configuration		Config 1, 2		SMTC.1			
DBT Window Configuration		Config 1, 2		DBT.1 (As defined in A.12.1)			
DL CCA model		Config 1, 2		As specified in clause D.7.2.1			
UL CCA model		Config 1, 2		As specified in clause D.7.2.2			
OCNG Patterns				OP.1			
PDSCH/PDCCH subcarrier spacing		Config 1, 2	kHz	30kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	Config 1, 2	NR_CCA_FR1_I	dBm/15Khz	-94		-111	
		NR_CCA_FR1_J				-111	
N_{oc} Note2	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-91		-108	
		NR_CCA_FR1_J				-108	
$\hat{E}_s/I_{ot}$			dB	2.23	-5.57	-2.11	-3.34
$\hat{E}_s/N_{oc}$			dB	6	1.4	1	0.2
SS-RSRP Note3	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-85	-89.6	-107	-107.8
		NR_CCA_FR1_J				-107	-107.8
Io Note3	Config 1, 2	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.91		-71.75	
		NR_CCA_FR1_J				-71.75	

Propagation condition			-	AWGN	
Antenna configuration				1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 10.5.1.1.5-2: Absolute accuracy requirements for the reported values for EN-DC FR1 intra-frequency SS-RSRP measurement accuracy on a CCA serving cell

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest SS-RSRP reported value (cell 3)	57	Bands NR_CCA_FR1_I	43
		Bands NR_CCA_FR1_J	43
Highest SS-RSRP reported value (cell 3)	76	Bands NR_CCA_FR1_I	55
		Bands NR_CCA_FR1_J	55
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest SS-RSRP reported value (cell 3)	54	Bands NR_CCA_FR1_I	38
		Bands NR_CCA_FR1_J	38
Highest SS-RSRP reported value (cell 3)	79	Bands NR_CCA_FR1_I	59
		Bands NR_CCA_FR1_J	59

Table 10.5.1.1.5-3: Relative accuracy requirements for the reported values for EN-DC FR1 intra-frequency SS-RSRP measurement accuracy on a CCA serving cell

	Test 1	**Test 2**
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	RSRP_x – 8	RSRP_x – 7
Highest reported value (Cell 3)	RSRP_x – 1	RSRP_x + 1
Extreme Conditions		
Lowest reported value (Cell 3)	RSRP_x – 8	RSRP_x – 7
Highest reported value (Cell 3)	RSRP_x - 1	RSRP_x + 1
RSRP_x is the reported value of Cell 2		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

10.5.1.2 EN-DC FR1-FR1 inter-frequency SS-RSRP measurement accuracy with CCA serving cell and CCA target cell

10.5.1.2.1 Test purpose

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.5.1.0.3 and 10.5.1.0.4 when both the serving cell and the target cell are subject to CCA.

10.5.1.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and RRM measurements in dynamic channel access or in semi-static channel access.

10.5.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 10.5.1.0.3 and 10.5.1.0.4 for absolute and relative accuracy, correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.1.2.

10.5.1.2.4 Test description

Supported test configurations are shown in Table 10.5.1.2.4.1-1. Both absolute and relative accuracy of SS-RSRP inter-frequency measurements are tested by using the parameters in Table 10.5.1.2.5-1. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.6B. In all test cases, Cell 2 is the PSCell, and Cell 3 is the target cell. The inter-frequency measurements are supported by a measurement gap.

10.5.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.1.2.4.1-1.

Table 10.5.1.2.4.1-1: Supported test configurations for EN-DC FR1-FR1 inter-frequency SS-RSRP measurement accuracy with CCA serving cell and CCA target cell

Configuration	Description
10.5.1.2-1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.5.1.2-2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 10.5.1.2.4.1-2.

Table 10.5.1.2.4.1-2: Initial conditions for EN-DC FR1-FR1 inter-frequency SS-RSRP measurement accuracy with CCA serving cell and CCA target cell

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 10.5.1.2.5-1.
2. Message contents are defined in clause 10.5.1.2.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

10.5.1.2.4.2 Test procedure

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. Both Cell 2 and Cell 3 are subject to CCA and transmit SSBs in DBT windows according to DL CCA model. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 10.5.1.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform measurements in the target neighbouring frequency, as specified in section 10.5.1.2.4.3.
4. The UE shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 10.5.1.2.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the SS-RSRP reported values in the periodic *MeasurementReport*. The SS-RSRP value of Cell 3 reported by the UE is compared to the expected SS-RSRP. If the value is outside the limits in Table 10.5.1.2.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
8. Repeat steps 2-7 for each subtest defined in Table 10.5.1.2.5-1.

10.5.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.1.2.4.3-1: Common Exception messages for EN-DC FR1-FR1 inter-frequency SS-RSRP measurement accuracy with CCA serving cell and CCA target cell

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern#0 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 10.5.1.2.4.3-2: *ReportConfigNR* for EN-DC FR1-FR1 inter-frequency SS-RSRP measurement accuracy with CCA serving cell and CCA target cell

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

10.5.1.2.5 Test requirements

Table 10.5.1.2.5-1 defines the primary level settings including test tolerances for EN-DC FR1-FR1 inter-frequency SS-RSRP measurement accuracy with CCA serving cell and CCA target cell. Table 10.5.1.2.5-2 and Table 10.5.1.2.5-3 define the absolute and relative accuracy requirements, correspondingly.

Table 10.5.1.2.5-1: Cell specific test parameters for EN-DC FR1-FR1 inter-frequency SS-RSRP measurement accuracy with CCA serving cell and CCA target cell

Parameter		Config	Unit	Test 1		Test 2	
				Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		1, 2		freq1	freq2	freq1	freq2
$BW_{channel}$		1, 2	MHz	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
Gap pattern ID				0		0	
Duplex mode		1, 2		TDD		TDD	
TDD configuration		1, 2		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
PDSCH Reference measurement channel		1, 2		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		1, 2		CR.1.1 CCA	-	CR.1.1 CCA	-
Dedicated CORESET Reference Channel		1, 2		CCR.1.1 CCA	-	CCR.1.1 CCA	-
SSB configuration	Semi-static channel access	1, 2		SSB.1 CCA (As defined in A.3A.1)		SSB.1 CCA (As defined in A.3A.1)	
	Dynamic channel access			SSB.2 CCA (As defined in A.3A.1)		SSB.2 CCA (As defined in A.3A.1)	
OCNG Patterns		1, 2		OP.1		OP.1	
TRS configuration		1, 2		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration		1, 2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	

Dedicated BWP configuration		1, 2		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 2		1, 2	µs	-	3	-	3
SMTC configuration		1, 2		SMTC.1		SMTC.1	
DBT Window Configuration		1, 2		As defined in A.12.1		As defined in A.12.1	
DL CCA model				As specified in clause D.7.2.1			
UL CCA model				As specified in clause D.7.2.2			
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1		1, 2	dB	0	0	0	0
N_{oc} Note2	NR_CCA_FR1_I	1, 2	dBm/15kHz	-96		(N_{oc} for Cell 3 +8dB)	-111
	NR_CCA_FR1_J						-110.5
N_{oc} Note2	NR_CCA_FR1_I	1, 2	dBm/SSB SCS	-93		(N_{oc} for Cell 3 +8dB)	-108.00
	NR_CCA_FR1_J						-107.50
$\hat{E}_s / I_{ot}$		1, 2	dB	10	10	13	-3
SS-RSRP Note3	NR_CCA_FR1_I	1, 2	dBm/SCS	-82.99		(RSRP for Cell 3 +24dB)	-111
	NR_CCA_FR1_J						-110.50
Io Note3	R_CCA_FR1_I	1, 2	dBm/ 38.16MHz	-51.53		(Io for Channel 3 +19.45dB)	-67.18
	NR_CCA_FR1_J						-74.68
$\hat{E}_s / N_{oc}$		1, 2	dB	10	10	13	-3
Propagation condition		1, 2	-	AWGN		AWGN	
Antenna configuration				1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 10.5.1.2.5-2: Absolute accuracy requirements for the reported values for EN-DC FR1-FR1 inter-frequency SS-RSRP measurement accuracy with CCA serving cell and CCA target cell

Normal Conditions	Test 1 All bands	Test 2	
Lowest SS-RSRP reported value (cell 3)	64	Bands NR_CCA_FR1_I	47
		Bands NR_CCA_FR1_J	40
Highest SS-RSRP reported value (cell 3)	83	Bands NR_CCA_FR1_I	60
		Bands NR_CCA_FR1_J	52
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest SS-RSRP reported value (cell 3)	61	Bands NR_CCA_FR1_I	43
		Bands NR_CCA_FR1_J	35
Highest SS-RSRP reported value (cell 3)	86	Bands NR_CCA_FR1_I	64
		Bands NR_CCA_FR1_J	57

Table 10.5.1.2.5-3: Relative accuracy requirements for the reported values for EN-DC FR1-FR1 inter-frequency SS-RSRP measurement accuracy with CCA serving cell and CCA target cell

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	RSRP_x – 7	RSRP_x – 31
Highest reported value (Cell 3)	RSRP_x + 7	RSRP_x – 18
Extreme Conditions		
Lowest reported value (Cell 3)	RSRP_x – 9	RSRP_x – 33
Highest reported value (Cell 3)	RSRP_x + 9	RSRP_x – 17
RSRP_x is the reported value of Cell 2		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

10.5.2 SS-RSRQ

10.5.2.0 Minimum Conformance Requirements

10.5.2.0.1 Intra-frequency absolute SS-RSRQ measurement accuracy requirements under CCA

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell under CCA.

The accuracy requirements in Table 10.5.2.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.9 for a corresponding Band for each relevant SSB.

Table 10.5.2.0.1-1: SS-RSRQ intra-frequency absolute accuracy under CCA

Accuracy		Conditions			
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$	I_o Note 1 range		
			NR operating band groups Note 3	Minimum Io	Maximum Io
dB	dB	dB		dBm / SCS_{SSB} / dBm/$BW_{Channel}$	dBm/$BW_{Channel}$

				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±2.5	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: NR operating band groups are as defined in clause 3A.4.1.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.29.1.1.

10.5.2.0.2 Void

10.5.2.0.3 Inter-frequency absolute SS-RSRQ measurement accuracy requirements under CCA

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency under CCA that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.5.2.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.10 for a corresponding Band for each relevant SSB.

Table 10.5.2.0.3-1: SS-RSRQ inter-frequency absolute accuracy under CCA

Accuracy		**Conditions**				
Normal condition	**Extreme condition**	**SSB Ês/Iot**	**Io [Note 1] range**			
			NR operating band groups [Note 3]	**Minimum Io**		**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**	**$dBm/BW_{Channel}$**	**$dBm/BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**	
±2.5	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: NR operating band groups are as defined in clause 3A.4.1.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.30.1.1.

10.5.2.0.4 Inter-frequency relative SS-RSRQ measurement accuracy requirements under CCA

The relative accuracy of SS-RSRQ in inter-frequency case is defined as the RSRQ measured from one cell on a frequency compared to the RSRQ measured from another cell on a different frequency, with at least one of the two frequencies being under CCA.

The accuracy requirements in Table 10.5.2.0.4-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.9 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB

- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 10.5.2.0.4-1: SS-RSRQ inter-frequency relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±4	±4	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups are as defined in clause 3A.4.1.

The normative reference for this requirement is TS 38.133 [6] clause 10.1.30.1.2.

10.5.2.1 EN-DC FR1 intra-frequency SS-RSRQ measurement accuracy with serving cell and target cell under CCA

10.5.2.1.1 Test purpose

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.5.2.0.1 when the serving and target cell are subject to CCA.

10.5.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and RRM measurements in dynamic channel access or in semi-static channel access.

10.5.2.1.3 Minimum conformance requirements

The minimum conformance requirement is specified in clause 10.5.2.0.1 for absolute RSRQ accuracy.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.2.1.

10.5.2.1.4 Test description

Supported test configurations are shown in Table 10.5.2.1.4.1-1. Absolute accuracy of SS-RSRQ intra-frequency measurements is tested by using the parameters in Table 10.5.2.1.5-1. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.6B. In all test cases, Cell 2 is the PSCell, and Cell 3 is the target cell.

10.5.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.2.1.4.1-1.

Table 10.5.2.1.4.1-1: Supported test configurations for EN-DC FR1 intra-frequency SS-RSRQ measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell

Configuration	Description
10.5.2.1-1	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.5.2.1-2	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 10.5.2.1.4.1-2.

Table 10.5.2.1.4.1-2: Initial conditions for EN-DC FR1 intra-frequency SS-RSRQ measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 10.5.2.1.5-1.
2. Message contents are defined in clause 10.5.2.1.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

10.5.2.1.4.2 Test procedure

In this test case all cells are on the same carrier frequency. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table 10.5.2.1.5-1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 10.5.2.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform intra-frequency measurements as specified in section 10.5.2.1.4.3.
4. The UE shall transmit an *RRCReconfigurationComplete* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. The SS shall enable DL and UL CCA model according to Table 10.5.2.1.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the SS-RSRQ reported values in the periodic *MeasurementReport*. The SS-RSRQ value of Cell 3 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 10.5.2.1.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

8. Repeat steps 1-7 for each subtest defined in Table 10.5.2.1.5-1.

10.5.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.2.1.4.3-1: Common Exception messages for EN-DC FR1 intra-frequency SS-RSRQ measurement accuracy on a CCA serving cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessTable H.3.10-2 with Condition SMTC.1

Table 10.5.2.1.4.3-2: *ReportConfigNR* for EN-DC FR1 intra-frequency SS-RSRQ measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	true		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

10.5.2.1.5 Test requirements

Table 10.5.2.1.5-1 defines the primary level settings including test tolerances for EN-DC FR1 intra-frequency SS-RSRQ measurement accuracy on a CCA serving cell. Table 10.5.2.1.5-2 defines the absolute accuracy requirements.

Table 10.5.2.1.5-1: Cell specific test parameters for EN-DC FR1 intra-frequency SS-RSRQ measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell

Parameter		Unit	Test 1		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1			
Duplex mode	Config 1, 2		TDD			
TDD configuration	Config 1, 2		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1, 2	MHz	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
DRX Cycle		ms	Not Applicable			

PDSCH Reference measurement channel	Config 1, 2			SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1, 2			CR.1.1 CCA		CR.1.1 CCA	
Control Channel RMC	Config 1, 2			CCR.1.1 CCA		CCR.1.1 CCA	
TRS configuration	Config 1, 2			TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OP. 1			
SS-RSSI-Measurement				Not Applicable			
Time offset with Cell 2	Config 1, 2		µs	-	3	-	3
SMTC configuration	Config 1, 2			SMTC.1			
SSB configuration	Semi-static channel access	Config 1, 2		SSB.1 CCA (As defined in A.3A.1.1)			
	Dynamic channel access			SSB.2 CCA (As defined in A.3A.1.2)			
PDSCH/PDCCH subcarrier spacing	Config 1, 2		kHz	30kHz			
DBT Window Configuration	Config 1, 2			DBT.1 (As defined in A.12.1)			
DL CCA model	Config 1, 2			As specified in clause D.7.2.1			
UL CCA model	Config 1, 2			As specified in clause D.7.2.2			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	Config1, 2	NR_CCA_FR1_I	Bm/15kHz	-92.6		-110	
		NR_CCA_FR1_J				-109.5	
N_{oc} Note2	Config 1, 2	NR_CCA_FR1_I	dBm/SC S	-89.6		-107	
		NR_CCA_FR1_J				-106.5	
$\hat{E}_s / I_{ot}$			dB	-1.76		-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	3	3	-4	-4
SS-RSRP Note3	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-86.59	-86.59	-110.99	-110.99
		NR_CCA_FR1_J				-110.49	-110.49
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77	-14.77	-17.34	-17.34
		NR_CCA_FR1_J					
Io Note3	Config 1, 2	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.56			-73.4
		NR_CCA_FR1_J					-72.9
Propagation condition			-	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Clause 3A.4.1.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 10.5.2.1.5-2: Absolute accuracy requirements for the reported values for EN-DC FR1 intra-frequency SS-RSRQ measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	SS-RSRQ_52	SS-RSRQ_44
Highest reported value (Cell 3)	SS-RSRQ_62	SS-RSRQ_59
Extreme Conditions		
Lowest reported value (Cell 3)	SS-RSRQ_49	SS-RSRQ_43
Highest reported value (Cell 3)	SS-RSRQ_65	SS-RSRQ_60

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

10.5.2.2 EN-DC FR1-FR1 inter-frequency SS-RSRQ measurement accuracy with serving cell and target cell under CCA

10.5.2.2.1 Test purpose

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.5.2.0.3 and 10.5.2.0.4 when both the serving cell and the target cell are subject to CCA.

10.5.2.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and RRM measurements in dynamic channel access or in semi-static channel access.

10.5.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 10.5.2.0.3 and 10.5.2.0.4 for absolute and relative accuracy, correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.2.2.

10.5.2.2.4 Test description

Supported test configurations are shown in Table 10.5.2.2.4.1-1. Both absolute and relative accuracy of SS-RSRQ inter-frequency measurements are tested by using the parameters in Table 10.5.2.2.5-1. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.6B. In all test cases, Cell 2 is the PSCell, and Cell 3 is the target cell. The inter-frequency measurements are supported by a measurement gap.

10.5.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.2.2.4.1-1.

Table 10.5.2.2.4.1-1: Supported test configurations for EN-DC FR1-FR1 inter-frequency SS-RSRQ measurement accuracy with CCA serving cell and CCA target cell

Configuration	Description
10.5.2.2-1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.5.2.2-2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 10.5.2.2.4.1-2.

Table 10.5.2.2.4.1-2: Initial conditions for EN-DC FR1-FR1 inter-frequency SS-RSRQ measurement accuracy with CCA serving cell and CCA target cell

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 10.5.2.2.5-1.
2. Message contents are defined in clause 10.5.2.2.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

10.5.2.2.4.2 Test procedure

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. Both Cell 2 and Cell 3 are subject to CCA and transmit SSBs in DBT windows according to DL CCA model. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 10.5.2.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform measurements in the target neighbouring frequency, as specified in section 10.5.2.2.4.3.
4. The UE shall transmit an *RRCReconfigurationComplete* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. The SS shall enable DL and UL CCA model according to Table 10.5.2.2.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the SS-RSRQ reported values in the periodic *MeasurementReport*. The SS-RSRQ value of Cell 3 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 10.5.2.2.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
8. Repeat steps 1-7 for each subtest defined in Table 10.5.2.2.5-1.

10.5.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.2.2.4.3-1: Common Exception messages for EN-DC FR1-FR1 inter-frequency SS-RSRQ measurement accuracy with CCA serving cell and CCA target cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern#0 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessH.3.10-2 with Condition SMTC.1

Table 10.5.2.2.4.3-2: *ReportConfigNR* for EN-DC FR1-FR1 inter-frequency SS-RSRQ measurement accuracy with CCA serving cell and CCA target cell

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	true		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

10.5.2.2.5 Test requirements

Table 10.5.2.2.5-1 defines the primary level settings including test tolerances for EN-DC FR1-FR1 inter-frequency SS-RSRQ measurement accuracy with CCA serving cell and CCA target cell. Table 10.5.2.2.5-2 and Table 10.5.2.2.5-3 define the absolute and relative accuracy requirements, correspondingly.

Table 10.5.2.2.5-1: Cell specific test parameters for EN-DC FR1-FR1 inter-frequency SS-RSRQ measurement accuracy with CCA serving cell and CCA target cell

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1, 2		TDD					
TDD configuration	Config 1, 2		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1, 2		40: $N_{RB,c}$ = 106					
BWP BW	Config 1, 2	MHz	40: $N_{RB,c}$ = 106					
Gap pattern ID			0					
DRX Cycle		ms	Not Applicable					

PDSCH Reference measurement channel		Config 1, 2		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		Config 1, 2		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel		Config 1, 2		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA	
TRS configuration		Config 1, 2		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OCNG pattern 1					
Time offset with Cell 2		Config 1, 2	µs	-	3	-	3	-	3
SMTC configuration		Config 1, 2		SMTC.1					
SSB configuration	Semi-static channel access	Config 1, 2		SSB.1 CCA					
	Dynamic channel access			SSB.2 CCA					
DBT Window Configuration		Config 1, 2		DBT.1					
PDSCH/PDCCH subcarrier spacing		Config 1, 2	kHz	30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1, 2	NR_CCA_FR1_I	dBm/15kHz	-87.80	-87.80	-113	-113	-112	-112
		NR_CCA_FR1_J						-111.5	-111.5
N_{oc} Note2	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-84.80	-84.80	-110	-110	-109	-109
		NR_CCA_FR1_J						-108.5	-108.5
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
SS-RSRP Note3	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-86.54	-86.54	-111.74	-111.74	-105.99	-110.74
		NR_CCA_FR1_J						-105.49	-110.24
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.76	-14.76	-14.76	-14.76	-14.76	-12.56
		NR_CCA_FR1_J							
Io Note3	Config 1, 2	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.52	-51.52	-76.72	-76.72	-73.18	-75.72
		NR_CCA_FR1_J						-72.68	-75.22
Propagation condition				AWGN	AWGN	AWGN	AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Clause 3A.4.1.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 10.5.2.2.5-2: Absolute accuracy requirements for the reported values for EN-DC FR1-FR1 inter-frequency SS-RSRQ measurement accuracy with CCA serving cell and CCA target cell

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_52	SS-RSRQ_52	SS-RSRQ_52
Highest reported value (Cell 3)	SS-RSRQ_62	SS-RSRQ_62	SS-RSRQ_62
Extreme Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_49	SS-RSRQ_49	SS-RSRQ_49
Highest reported value (Cell 3)	SS-RSRQ_65	SS-RSRQ_65	SS-RSRQ_65

Table 10.5.2.2.5-3: Relative accuracy requirements for the reported values for EN-DC FR1-FR1 inter-frequency SS-RSRQ measurement accuracy with CCA serving cell and CCA target cell

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_x - 7	SS-RSRQ_x - 7	SS-RSRQ_x - 11
Highest reported value (Cell 3)	SS-RSRQ_x + 7	SS-RSRQ_x + 7	SS-RSRQ_x + 2
Extreme Conditions			
Lowest reported value (Cell 3)	SS-RSRQ_x - 9	SS-RSRQ_x - 9	SS-RSRQ_x - 13
Highest reported value (Cell 3)	SS-RSRQ_x + 9	SS-RSRQ_x + 9	SS-RSRQ_x + 4
RSRQ_x is the reported value of Cell 2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

10.5.3 SS-SINR

10.5.3.0 Minimum Conformance Requirements

10.5.3.0.1 Intra-frequency absolute SS-SINR measurement accuracy requirements under CCA

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell under CCA.

The accuracy requirements in Table 10.5.3.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.9 for a corresponding Band for each relevant SSB.

Table 10.5.3.0.1-1: SS-SINR intra-frequency absolute accuracy under CCA

Accuracy		**Conditions**				
Normal condition	**Extreme condition**	**SSB $\hat{E}s/Iot$** Note 3	**Io** Note 1 **range**			
			NR operating band groups Note 4	**Minimum Io**		**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±3.0	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							

NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB.
NOTE 4: NR operating band groups are as defined in clause 3A.4.1.

The normative reference for this requirement is TS 38.133 [6] clause 10.1.31.1.1.

10.5.3.0.2 Void

10.5.3.0.3 Inter-frequency absolute SS-SINR measurement accuracy requirements under CCA

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency under CCA that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.5.3.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.10 for a corresponding Band for each relevant SSB.

Table 10.5.3.0.3-1: SS-SINR inter-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 3	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3.0	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	116.5	-113.5		
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB.
NOTE 4: NR operating band groups are as defined in clause 3A.4.1.

The normative reference for this requirement is TS 38.133 [6] clause 10.1.32.1.1.

10.5.3.0.4 Inter-frequency relative SS-SINR measurement accuracy requirements under CCA

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency compared to the SS-SINR measured from another cell on a different frequency, with at least one of the two frequencies being under CCA.

The accuracy requirements in Table 10.5.3.0.4-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.10 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 10.5.3.0.4-1: SS-SINR inter-frequency relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2,4	Io Note 1 range				
			NR operating band groups Note 5	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 120 kHz	SCS_{SSB} = 240 kHz		
±3.5	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±4	±4	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: The requirements apply for SSB Ês/Iot ≤ 25 dB.
NOTE 5: NR operating band groups are as defined in clause 3A.4.1.

The normative reference for this requirement is TS 38.133 [6] clause 10.1.32.1.2.

10.5.3.1 EN-DC FR1 intra-frequency SS-SINR measurement accuracy on PSCC under CCA

10.5.3.1.1 Test purpose

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.5.3.0.1 when the serving and target cell are subject to CCA.

10.5.3.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and RRM measurements in dynamic channel access or in semi-static channel access and SS-SINR measurements on shared spectrum.

10.5.3.1.3 Minimum conformance requirements

The minimum conformance requirement is specified in clause 10.5.3.0.1 for absolute SS-SINR accuracy.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.3.1.

10.5.3.1.4 Test description

Supported test configurations are shown in Table 10.5.3.1.4.1-1. Absolute accuracy of SS-SINR intra-frequency measurements is tested by using the parameters in Table 10.5.3.1.5-1. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.6B. In all test cases, Cell 2 is the PSCell under CCA, and Cell 3 is the target cell under CCA.

10.5.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.3.1.4.1-1.

Table 10.5.3.1.4.1-1: Supported test configurations for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on PSCC under CCA

Configuration	Description
10.5.3.1-1	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.5.3.1-2	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 10.5.3.1.4.1-2.

Table 10.5.3.1.4.1-2: Initial conditions for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on PSCC under CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 10.5.3.1.5-1.
2. Message contents are defined in clause 10.5.3.1.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

10.5.3.1.4.2 Test procedure

In this test case all cells are on the same carrier frequency. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table 10.5.3.1.5-1. In all test cases, Cell 2 is the PSCell with CCA and Cell 3 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 2 and 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 10.5.3.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform intra-frequency measurements as specified in section 10.5.3.1.4.3.
4. The UE shall transmit an *RRCReconfigurationComplete* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. The SS shall enable DL and UL CCA model according to Table 10.5.3.1.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the SS-SINR reported values in the periodic *MeasurementReport*. The SS-SINR value of Cell 3 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 10.5.3.1.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

8. Repeat steps 1-7 for each subtest defined in Table 10.5.3.1.5-1.

10.5.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.3.1.4.3-1: Common Exception messages for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on PSCC under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessH.3.10-2 with Condition SMTC.1

Table 10.5.3.1.4.3-2: *ReportConfigNR* for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on PSCC under CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

10.5.3.1.5 Test requirements

Table 10.5.3.1.5-1 defines the primary level settings including test tolerances for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on a CCA serving cell. Table 10.5.3.1.5-2 defines the absolute accuracy requirements.

Table 10.5.3.1.5-1: Cell specific test parameters for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on PSCC under CCA

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1		freq1	
DL CCA model	Config 1,2		As specified in clause D.7.2.1			
UL CCA model	Config 1,2		As specified in clause D.7.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-

		$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode		Config 1,2		TDD			
TDD configuration		Config 1,2		TDDConf.1.1 CCA			
Downlink initial BWP configuration				DLBWP.0.1			
Downlink dedicated BWP configuration				DLBWP.1.1			
Uplink initial BWP configuration				ULBWP.0.1			
Uplink dedicated BWP configuration				ULBWP.1.1			
DRX Cycle configuration			ms	Not Applicable			
TRS Configuration		Config 1,2		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel		Config 1,2		SR.1.1 CCA		SR1.1 CCA	
RMSI CORESET Reference Channel		Config 1,2		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel		Config 1,2		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
Time offset with Cell 2		Config 1,2	µs	-	3	-	3
DBT Window Configuration		Config 1,2		DBT.1			
SSB configuration		Config 1,2		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration		Config 1,2		SMTC.1			
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	30			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93.2		-112	
		NR_CCA_FR1_J				-111.5	
N_{oc} Note2	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-90.2		-109	
		NR_CCA_FR1_J				-108.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.10	-5.10
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-3.5	-3.5
SS-RSRP Note3	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-85.65	-87.53	-112.49	-112.49
		NR_CCA_FR1_J				-111.99	-111.99
SS-SINR Note3		NR_CCA_FR1_I	dB	0	-3.19	-5.10	-5.10
		NR_CCA_FR1_J					
Io Note3	Config 1,2	NR_CCA_FR1_I	dBm/38.16MHz	-51.59		-75.17	
		NR_CCA_FR1_J				-74.67	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	NR operating band groups are as defined in Clause 3A.4.1.
Note 6:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 10.5.3.1.5-2: Absolute accuracy requirements for the reported values for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on PSCC under CCA

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	SS-SINR_31	SS-SINR_28
Highest reported value (Cell 3)	SS-SINR_49	SS-SINR_45
Extreme Conditions		
Lowest reported value (Cell 3)	SS-SINR_30	SS-SINR_27
Highest reported value (Cell 3)	SS-SINR_50	SS-SINR_46

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

10.5.3.2 EN-DC FR1-FR1 inter-frequency SS-SINR measurement accuracy on PSCC under CCA

10.5.3.2.1 Test purpose

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.5.3.0.3 and 10.5.3.0.4 when both the serving cell and the target cell are subject to CCA.

10.5.3.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and RRM measurements in dynamic channel access or in semi-static channel access and SS-SINR measurements on shared spectrumsupporting.

10.5.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 10.5.3.0.3 and 10.5.3.0.4 for absolute and relative accuracy, correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.3.2.

10.5.3.2.4 Test description

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table 10.5.3.2.4.1-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table 10.5.3.2.5-1. In all test cases, Cell 2 is the PSCell with CCA and Cell 3 is target cell with CCA. Cell 1 is the E-UTRA cell of which specific test parameters for this test case are specified in Table A.6B.

10.5.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.3.2.4.1-1.

Table 10.5.3.2.4.1-1: Supported test configurations for EN-DC FR1-FR1 inter-frequency SS-SINR measurement accuracy on PSCC under CCA

Configuration	Description
10.5.3.2-1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.5.3.2-2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 10.5.3.2.4.1-2.

Table 10.5.3.2.4.1-2: Initial conditions for EN-DC FR1-FR1 inter-frequency SS-SINR measurement accuracy on PSCC under CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 10.5.3.2.5-1.
2. Message contents are defined in clause 10.5.3.2.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

10.5.3.2.4.2 Test procedure

Three sub-tests (Test 1, Test 2 and Test 3) are provided different N_{oc} on Cells 2 and 3. In all test cases, Cell 2 is the PSCell under CCA, and Cell 3 is the target cell under CCA. The inter-frequency measurements are supported by a measurement gap. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 10.5.3.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform measurements in the target neighbouring frequency, as specified in section 10.5.3.2.4.3.

4. The UE shall transmit an *RRCReconfigurationComplete* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. The SS shall enable DL and UL CCA model according to Table 10.5.3.2.5-1.

5. The UE shall transmit periodical *MeasurementReport* messages.

6. After 10s wait from Step 5, the SS shall check the SS-SINR reported values in the periodic *MeasurementReport*. The SS-SINR value of Cell 3 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 10.5.3.2.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

8. Repeat steps 1-7 for each subtest defined in Table 10.5.3.2.5-1.

10.5.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.3.2.4.3-1: Common Exception messages for EN-DC FR1-FR1 inter-frequency SS-SINR measurement accuracy on PSCC under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern#0 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessH.3.10-2 with Condition SMTC.1

Table 10.5.3.2.4.3-2: *ReportConfigNR* for EN-DC FR1-FR1 inter-frequency SS-SINR measurement accuracy on PSCC under CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

10.5.3.2.5 Test requirements

Table 10.5.3.2.5-1 defines the primary level settings including test tolerances for EN-DC FR1-FR1 inter-frequency SS-SINR measurement accuracy with CCA serving cell and CCA target cell. Table 10.5.3.2.5-2 and Table 10.5.3.2.5-3 define the absolute and relative accuracy requirements, correspondingly.

Table 10.5.3.2.5-1: Cell specific test parameters for EN-DC FR1-FR1 inter-frequency SS-SINR measurement accuracy on PSCC under CCA

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN				freq1	freq2	freq1	freq2	freq1	freq2
DL CCA model		Config 1,2		As specified in clause D.7.2.1					
UL CCA model		Config 1,2		As specified in clause D.7.2.2					
UL CCA probability		P_{CCA_UL}		1.0	-	1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8		P_{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9		$P_{CCA_DL_1}$		0.75	-	0.75	-	0.75	-
		$P_{CCA_DL_2}$		0.75	-	0.75	-	0.75	-
Duplex mode		Config 1,2		TDD					
TDD configuration		Config 1,2		TDDConf.1.1 CCA					
Downlink initial BWP configuration				DLBWP.0.1					
Downlink dedicated BWP configuration				DLBWP.1.1					
Uplink initial BWP configuration				ULBWP.0.1					
Uplink dedicated BWP configuration				ULBWP.1.1					
DRX Cycle configuration			ms	Not Applicable					
Gap pattern ID				0	-	0	-	0	-
TRS configuration		Config 1,2		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel		Config 1,2		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		Config 1,2		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel		Config 1,2		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns				OP.1					
SS-RSSI-Measurement				Not Applicable					
Time offset with Cell 2		Config 1,2	µs	-	3	-	3	-	3
DBT Window configuration		Config 1,2		DBT.1					
SSB configuration		Config 1,2		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access					
SMTC configuration		Config 1,2		SMTC.1					
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	30					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-88		-108.5		-115.5	
		NR_CCA_FR1_J						-115	
N_{oc} Note2	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-85		-105.5		-112.5	

		NR_CCA_FR1_J				-112
$\hat{E}_s / I_{ot}$			dB	-1.75	20	-3.2
$\hat{E}_s / N_{oc}$			dB	-1.75	20	-3.2
SS-RSRP Note3	Config 1,2	NR_CCA_FR1_I		-86.74	-85.49	-115.69
		NR_CCA_FR1_J				-115.19
SS-SINR Note3		NR_CCA_FR1_I	dB	-1.75	20	-3.2
		NR_CCA_FR1_J				
Io Note3	Config 1,2	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.72	-54.40	-79.75
		NR_CCA_FR1_J				-79.25
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in Clause 3A.4.1.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 10.5.3.2.5-2: Absolute accuracy requirements for the reported values for EN-DC FR1-FR1 inter-frequency SS-SINR measurement accuracy on PSCC under CCA

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	SS-SINR_35	SS-SINR_79	SS-SINR_32
Highest reported value (Cell 3)	SS-SINR_51	SS-SINR_94	SS-SINR_49
Extreme Conditions			
Lowest reported value (Cell 3)	SS-SINR_33	SS-SINR_77	SS-SINR_31
Highest reported value (Cell 3)	SS-SINR_53	SS-SINR_96	SS-SINR_50

Table 10.5.3.2.5-3: Relative accuracy requirements for the reported values for EN-DC FR1-FR1 inter-frequency SS-SINR measurement accuracy on PSCC under CCA

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	SS-SINR_x - 10	SS-SINR_x - 10	SS-SINR_x - 11
Highest reported value (Cell 3)	SS-SINR_x + 10	SS-SINR_x + 10	SS-SINR_x + 11
Extreme Conditions			
Lowest reported value (Cell 3)	SS-SINR_x - 11	SS-SINR_x - 11	SS-SINR_x - 11
Highest reported value (Cell 3)	SS-SINR_x + 11	SS-SINR_x + 11	SS-SINR_x + 11
SS-SINR_x is the reported value of Cell 2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

10.5.3.3 EN-DC FR1 intra-frequency SS-SINR measurement accuracy on SCC under CCA

10.5.3.3.1 Test purpose

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.5.3.0.1 when the serving and target cell are subject to CCA.

10.5.3.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and RRM measurements in dynamic channel access or in semi-static channel access and SS-SINR measurements on shared spectrum, and 2DL CA.

10.5.3.3.3 Minimum conformance requirements

The minimum conformance requirement is specified in clause 10.5.3.0.1 for absolute SS-SINR accuracy.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.3.1.

10.5.3.3.4 Test description

Supported test configurations are shown in Table 10.5.3.3.4.1-1. Absolute accuracy of SS-SINR intra-frequency measurements is tested by using the parameters in Table 10.5.3.3.5-1. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.6B. In all test cases, Cell 2 is the PSCell with CCA, Cell 3 is the SCell with CCA, and Cell 4 is the target cell with CCA.

10.5.3.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.3.3.4.1-1.

Table 10.5.3.3.4.1-1: Supported test configurations for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on SCC under CCA

Configuration	Description
10.5.3.3-1	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.5.3.3-2	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 10.5.3.3.4.1-2.

Table 10.5.3.3.4.1-2: Initial conditions for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on SCC under CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.3.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	

Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 10.5.3.3.5-1.
2. Message contents are defined in clause 10.5.3.3.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 and Cell 3 are the NR cell (PSCell) and NR SCell respectively, with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 4 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

10.5.3.3.4.2 Test procedure

In this test case Cell 2 (PSCell) in on frequency 1 while Cell 3 (SCell) and Cell 4 (target cell) which are intra-frequency neighbors, are on frequency 2. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table 10.5.3.3.5-1. Cell 2 is the PSCell with CCA, Cell 3 is the SCell with CCA, and Cell 4 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 2, 3 and 4. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. The SS shall configure SCell (Cell 3) on the NR-U SCC as per TS 38.508-1 [14] clause 7.5.2, with the message content exceptions defined in clause 10.5.3.3.4.3. NR *RRCReconfiguration* message is contained in *RRCConnectionReconfiguration* and NR *RRCReconfigurationComplete* message is contained in *RRCConnectionReconfigurationComplete*. Cell 3 is an activated SCell and is scheduled throughout the test as specified in Table 10.5.3.3.5-1.
3. Set the parameters according to Table 10.5.3.3.5-1 as appropriate.
4. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform SCC intra-frequency measurements as specified in section 10.5.3.3.4.3.
5. The UE shall transmit an *RRCReconfigurationComplete* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. The SS shall enable DL and UL CCA model according to Table 10.5.3.3.5-1.
6. The UE shall transmit periodical *MeasurementReport* messages.
7. After 10s wait from Step 6, the SS shall check the SS-SINR reported values in the periodic *MeasurementReport*. The SS-SINR value of Cell 4 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 10.5.3.3.5-2 or the UE fails to report the measurement value for Cell 4, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
8. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
9. Repeat steps 1-8 for each subtest defined in Table 10.5.3.3.5-1.

10.5.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.3.3.4.3-1: Common Exception messages for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on SCC under CCA

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessH.3.10-2 with Condition SMTC.1 CCA

Table 10.5.3.3.4.3-2: *RRCReconfiguration* (step 2, SCell addition) for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on SCC under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig-DEFAULT	Measurements configuration	NR_MEAS
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell(n)	n is number of SCC to be added	SCell_add
}			
}			
}			
}			

Table 10.5.3.3.4.3-3: *ReportConfigNR* for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on SCC under CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

10.5.3.3.5 Test requirements

Table 10.5.3.3.5-1 defines the primary level settings including test tolerances for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on a CCA serving SCell. Table 10.5.3.3.5-2 defines the absolute accuracy requirements.

Table 10.5.3.3.5-1: Cell specific test parameters for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on SCC under CCA

Parameter	Unit	Test 1		Test 2	
		Cell 2 / Cell 3	Cell 4	Cell 2 / Cell 3	Cell 4
SSB ARFCN		freq1 for Cell 2	freq2	freq1 for Cell 2	freq2

			freq2 for Cell 3		freq2 for Cell 3		
DL CCA model	Config 1,2		As specified in clause D.7.2.1				
UL CCA model	Config 1,2		As specified in clause D.7.2.2				
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-	
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-	
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-	
	$P_{CCA_DL_2}$		0.75	-	0.75	-	
Duplex mode	Config 1,2		TDD				
TDD configuration	Config 1,2		TDDConf.1.1 CCA				
Downlink initial BWP configuration			DLBWP.0.1				
Downlink dedicated BWP configuration			DLBWP.1.1				
Uplink initial BWP configuration			ULBWP.0.1				
Uplink dedicated BWP configuration			ULBWP.1.1				
DRX Cycle configuration		ms	Not Applicable				
TRS Configuration	Config 1,2		TRS.1.2 TDD		TRS.1.2 TDD		
PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA		SR1.1 CCA		
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 CCA		CR.1.1 CCA		
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 CCA		CCR.1.1 CCA		
OCNG Patterns			OP.1				
SS-RSSI-Measurement			Not Applicable				
Time offset with Cell 2	Config 1,2	µs	3 (for Cell 3)	3	3 (for Cell 3)	3	
DBT Window Configuration	Config 1,2		DBT.1				
SSB configuration	Config 1,2		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access				
SMTC configuration	Config 1,2		SMTC.1				
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	30				
EPRE ratio of PSS to SSS		dB	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93.2		-112	
		NR_CCA_FR1_J				-111.5	
N_{oc} Note2	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-90.2		-109	
		NR_CCA_FR1_J				-108.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.10	-5.10
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-3.5	-3.5
SS-RSRP Note 3	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-85.65	-87.53	-112.49	-112.49
		NR_CCA_FR1_J				-111.99	-111.99
SS-SINR Note3		NR_CCA_FR1_I	dB	0	-3.19	-5.10	-5.10

		NR_CCA_FR1_J			
Io[Note3]	Config 1,2	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.59	-75.17
		NR_CCA_FR1_J			-74.67
Propagation condition			-	AWGN	
Antenna configuration			-	1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in Clause 3A.4.1.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration

Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 10.5.3.3.5-2: Absolute accuracy requirements for the reported values for EN-DC FR1 intra-frequency SS-SINR measurement accuracy on SCC under CCA

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 4)	SS-SINR_31	SS-SINR_28
Highest reported value (Cell 4)	SS-SINR_49	SS-SINR_45
Extreme Conditions		
Lowest reported value (Cell 4)	SS-SINR_30	SS-SINR_27
Highest reported value (Cell 4)	SS-SINR_50	SS-SINR_46

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

10.5.4 L1-RSRP measurement accuracy for beam reporting with CCA serving cell

10.5.4.0 Minimum conformance requirements

10.5.4.0.1 Minimum conformance requitements for SSB-based L1-RSRP measurement accuracy for beam reporting under CCA

10.5.4.0.1.1 SSB-based L1-RSRP measurement absolute accuracy under CCA

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement under CCA.

The accuracy requirements in Table 10.5.4.0.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.

- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.11.1 of TS 38.133 [6] for a corresponding Band for each relevant SSB.

Table 10.5.4.0.1.1-1: SSB based L1-RSRP absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 2]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±5.0	±9.5	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-70
			NR_CCA_FR1_J	-116.5	-113.5		
±8.5	±11.5	≥-3	NR_CCA_FR1_I	N/A	N/A	-70	-50
			NR_CCA_FR1_J				
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups are as defined in clause 3A.4.1.							

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined in TS 38.133 [6] Table 10.1.6.1-1.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.33.1 and 10.1.6.

10.5.4.0.1.2 SSB-based L1-RSRP measurement relative accuracy under CCA

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the serving cell under CCA.

The accuracy requirements in Table 10.5.4.0.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to 38.133 [6] Annex B.2.11.1 for a corresponding Band for each relevant SSB.

Table 10.5.4.0.1.2-1: SSB based L1-RSRP relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot [Note 2]	Io [Note 1] range				
			NR operating band groups [Note 3]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of SSBs to which the requirement applies. NOTE 3: NR operating band groups are as defined in clause 3A.4.1.							

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by TS 38.133 [6] Table 10.1.6.1-1.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1.33.1 and 10.1.6.

10.5.4.1 EN-DC FR1 SSB based L1-RSRP measurement accuracy with CCA

10.5.4.1.1 Test purpose

The purpose of this test is to verify that the SSB based L1-RSRP absolute measurement accuracy is within the specified limits for all bands. This test will verify the L1-RSRP measurement accuracy requirements in clauses 10.5.4.0.1.1 and 10.5.4.0.1.2.

10.5.4.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC FR1 with a shared spectrum NR carrier, RRM measurements in dynamic channel access or in semi-static channel access and UL with a shared spectrum NR carrier.

10.5.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.5.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.4.1.

10.5.4.1.4 Test description

There are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell under CCA (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in Table A.6B.1-1. The test configurations and parameters for the Cell 2 are given in Table 10.5.4.1.4.1-1 and Table 10.5.4.1.5-1 below respectively. Two sub-tests (Test 1 and Test 2) are provided with different N_{oc} on Cell 2. The absolute and relative accuracy of L1-RSRP measurements is tested by using the parameters in Table 10.5.4.1.5-2 and Table 10.5.4.1.5-3 respectively.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

10.5.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.4.1.4.1-1. Configure the test equipment and the DUT according to the parameters in Table 10.5.4.1.4.1-2. Test environment parameters are given in Table 10.5.4.1.4.1-2.

Table 10.5.4.1.4.1-1: Supported test configurations for EN-DC FR1 SSB based L1-RSRP measurement accuracy with CCA

Config	Description
10.5.4.1-1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
10.5.4.1-2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 10.5.4.1.4.1-2: Test Environment parameters for EN-DC FR1 SSB based L1-RSRP measurement accuracy with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 10.5.4.1.4.3.
2. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Table A.6B.1-1. Cell 2 is NR FR1 PSCell under CCA and is the target for SSB based L1-RSRP measurements.

10.5.4.1.4.2 Test procedure

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1. The CCA model (both DL and UL) is disabled (i.e. PCCA_DL_i= PCCA_UL=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

Prior to the start of the time duration T1, the UE shall be fully synchronized to PSCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the table 10.5.4.1.5-1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 10.5.4.1.4.1-2.
2. The SS shall set the parameters according to Test 1 in Table 10.5.4.1.5-1 and enable DL and UL CCA model according to the same table.
3. The UE shall start sending L1-RSRP report including results of both SSB#0 and SSB#1 every 80 slots.
4. The SS shall check following requirements:

   R1: The SS shall check the L1-RSRP reported values of SSB#0 or SSB#1 in the periodic L1-RSRP reports. If the value for the strongest SSB is within the limits in Table 10.5.4.1.5-2, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

   R2: The SS shall check the L1-RSRP reported values of SSB#0 and SSB#1 in the periodic L1-RSRP reports. The DIFF-RSRP value of SSB#0 or SSB#1 reported by the UE is compared to the expected DIFF-RSRP. If the DIFF-RSRP value is within the limits in Table 10.5.4.1.5-3, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
6. Set the parameters according to Test 2 in Table 10.5.4.1.5-1 and repeat steps 3-5.

10.5.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.4.1.4.3-1: Common Exception messages for EN-DC FR1 SSB based L1-RSRP measurement accuracy with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10 Table H.3.4-1 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 10.5.4.1.4.3-2: *RadioLinkMonitoringConfig* for EN-DC FR1 SSB based L1-RSRP measurement accuracy with CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

10.5.4.1.5 Test requirement

Table 10.5.4.1.5-1 defines the primary level settings for all tests for EN-DC FR1 SSB based L1-RSRP measurement accuracy with CCA. In both Test 1 and Test 2, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.5.4.0.1.1 and 10.5.4.0.1.2 while meeting the corresponding absolute accuracy requirements in Table 10.5.4.1.5-2, and the corresponding relative accuracy requirements in Table 10.5.4.1.5-3 for all test configurations.

Table 10.5.4.1.5-1: Test parameters for EN-DC FR1 SSB based L1-RSRP measurement accuracy with CCA

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1,2		freq1	freq1
DL CCA model	1,2		As specified in D.7.2.1	As specified in D.7.2.1
UL CCA model	1,2		As specified in D.7.2.2	As specified in D.7.2.2
Duplex mode	1,2		TDD	TDD
TDD Configuration	1,2		TDDConf.1.1 CCA	TDDConf.1.1 CCA
$BW_{channel}$	1,2	MHz	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
Duplex mode	1,2		TDD	TDD
TDD configuration	1,2		TDDConf.1.1 CCA	TDDConf.1.1 CCA
PDSCH Reference measurement channel	1,2		SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA	CCR.1.1 CCA
SSB configuration for Semi-static channel access	1,2		SSB.3 CCA	SSB.3 CCA
SSB configuration for Dynamic channel access	1,2		SSB.4 CCA	SSB.4 CCA
OCNG Patterns	1,2		OP.1	OP.1
TRS configuration	1,2		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1	DBT.1
reportConfigType	1,2		periodic	periodic
reportQuantity	1,2		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1,2		2	2

L1-RSRP reporting period		1,2		slot80	slot80
EPRE ratio of PSS to SSS		1,2	dB	0	0
EPRE ratio of PBCH DMRS to SSS		1,2			
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_TDD_FR1_I	1,2	dBm/15kHz	-96	-113
N_{oc} Note2	NR_TDD_FR1_I	1,2	dBm/SCS	-93	-110
$\hat{E}_s / I_{ot}$		1,2	dB	10	-2.2
SS-RSRP Note3	NR_TDD_FR1_I	1,2	dBm/SCS	-82.99	-112.19
Io Note3	NR_TDD_FR1_I	1,2	dBm/ 38.16MHz	-51.53	-76.90
$\hat{E}_s / N_{oc}$		1,2	dB	10	-2.2
Propagation condition		1,2		AWGN	AWGN
Antenna configuration		1,2		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 10.5.4.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	63	Bands NR_CCA_FR1_I	38
		Bands NR_CCA_FR1_J	38
Highest reported value (Cell 2)	84	Bands NR_CCA_FR1_I	51
		Bands NR_CCA_FR1_J	51
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	60	Bands NR_CCA_FR1_I	33
		Bands NR_CCA_FR1_J	33
Highest reported value (Cell 2)	87	Bands NR_CCA_FR1_I	56
		Bands NR_CCA_FR1_J	56
NOTE: NR operating band groups are defined in clause 3A.4.1, Table 3A.4.1-1			

Table 10.5.4.1.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2
Extreme Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

10.5.5 RSSI

10.5.5.0 Minimum Conformance Requirements

10.5.5.0.1 Intra-frequency absolute RSSI measurement accuracy requirements in FR1

The accuracy requirements for intra-frequency RSSI measurements on a carrier frequency under CCA are specified in Table 10.5.5.0.1-1. The requirements apply for any configured RSSI *measDuration* [13], provided that:

- All symbols during each RSSI measurement duration are available for RSSI sampling within the same reporting interval.

The intra-frequency RSSI measurement bandwidth is the channel bandwidth defined in Clause 4 of TS 37.213 [37], where the channel has the centre frequency configured by *ARFCN-valueNR*.

Table 10.5.5.0.1-1: Intra-frequency RSSI accuracy under CCA

Accuracy		**Conditions**				
Normal condition	**Extreme condition**	**Io [Note 1] range**				
		NR operating band groups [Note 2]	**Minimum Io**			**Maximum Io**
dB	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
			SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
[±3.5]	[±6.5]	NR_CCA_FR1_I	-117	-114	N/A	-70
		NR_CCA_FR1_J	-116.5	-113.5		
[±5.5]	[±8.5]	NR_CCA_FR1_I	N/A	N/A	-70	-50
		NR_CCA_FR1_J				
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups are as defined in clause 3A.4.1.						

The normative reference for this requirement is TS.38.133 [6] clause 10.1.34.1.

10.5.5.0.2 Inter-frequency absolute RSSI measurement accuracy requirements in FR1

The accuracy requirements for inter-frequency RSSI measurements on a carrier frequency under CCA are the same as specified in clause 10.5.5.0.1.

The inter-frequency RSSI measurement bandwidth is the channel bandwidth defined in Clause 4 of TS 37.213 [37], where the channel has the centre frequency configured by *ARFCN-valueNR*.

The normative reference for this requirement is TS.38.133 [6] clause 10.1.34.2.

10.5.5.1 EN-DC FR1 RSSI measurement accuracy on PSCC with CCA

10.5.5.1.1 Test purpose

The purpose of this test is to verify that RSSI measurement accuracy for PSCC is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in clause 10.5.5.0.1 when the PSCC is subject to CCA.

10.5.5.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and supporting RRM and RSSI measurements on shared channel access.

10.5.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.5.1.

10.5.5.1.4 Test description

10.5.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.5.1.4.1-1.

Table 10.5.5.1.4.1-1: EN-DC FR1 RSSI measurement accuracy supported test configurations for PSCC under CCA

Test Case ID	Description
10.5.5.1-1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.5.5.1-2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Configure the test equipment and the DUT according to the parameters in Table 10.5.5.1.4.1-2.

Table 10.5.5.1.4.1-2: Initial conditions for EN-DC FR1 RSSI measurement accuracy on PSCC under CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 10.5.5.1.5-1.
2. Message contents are defined in clause 10.5.5.1.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the PSCell and is the target cell for RSSI measurements. The connection setup is done according to the settings in clause C.1.2 and C.1.3.

10.5.5.1.4.2 Test procedure

In this set of test cases there are two cells, E-UTRAN PCell (Cell 1), FR1 PSCell under CCA (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *EN-DC*, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 10.5.5.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform RSSI measurements according to the RMTC specified in section 10.5.5.1.4.3.
4. The UE shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 10.5.5.1.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the RSSI reported values in the periodic *MeasurementReport*. The RSSI value of Cell 2 reported by the UE is compared to the expected RSSI. If the value is outside the limits in Table 10.5.5.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

10.5.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.5.1.4.3-1: Common Exception messages for EN-DC FR1 RSSI measurement accuracy for PSCC under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 10.5.5.1.4.3-2: *MeasResults* for EN-DC FR1 RSSI measurement accuracy for PSCC under CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 10.5.5.1.4.3-3: *MeasResultForRSSI* for EN-DC FR1 RSSI measurement accuracy for PSCC under CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
rssi-Result-r16	measResultRSSI	RSSI-Range-r16, integer (0..76)	RSSI

10.5.5.1.5 Test requirement

Table 10.5.5.1.5-1 defines the primary level settings including test tolerances for EN-DC FR1 RSSI measurement accuracy for PSCC under CCA. Each RSSI measurement report shall meet the corresponding accuracy requirements in Table 10.5.5.1.5-3.

Table 10.5.5.1.5-1: Cell specific test parameters for EN-DC FR1 RSSI measurement accuracy for PSCC under CCA

Parameter		Configurations	Unit	Test 1
				Cell 2
RF Channel Number				1
$BW_{channel}$			MHz	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA
P_{CCA_DL}				0.9375 (Note 1, 3)
P_{CCA_UL}				0.75 / 0.75 (Note 2, 3)
DL CCA model				As specified in D.7.2.1
UL CCA model				As specified in D.7.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth
Channel access bandwidth			MHz	20
DRX Cycle configuration			ms	Not Applicable
PDSCH Reference measurement channel				SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA
OCNG Patterns				OP.1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-58.96
Propagation condition		-	AWGN
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table 10.5.5.1.5-2: EN-DC FR1 RSSI RMTC parameters for EN-DC FR1 RSSI measurement accuracy for PSCC under CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

Table 10.5.5.1.5-3: Requirements for the reported values for EN-DC FR1 RSSI measurement accuracy for PSCC under CCA

Normal Conditions	**Test 1 All bands**
Lowest RSSI reported value	35
Highest RSSI reported value	49
Extreme Conditions	**Test 1 All bands**
Lowest RSSI reported value	32
Highest RSSI reported value	52
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1	

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

10.5.5.2 EN-DC FR1 RSSI measurement accuracy on SCC with CCA

10.5.5.2.1 Test purpose

The purpose of this test is to verify that RSSI measurement accuracy for SCC is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in clause 10.5.5.0.1 when SCC is subject to CCA.

10.5.5.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and supporting RRM and RSSI measurements on shared channel access.

10.5.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 10.5.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A. 10.5.5.2.

10.5.5.2.4 Test description

10.5.5.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.5.2.4.1-1.

Table 10.5.5.2.4.1-1: Supported test configurations for EN-DC FR1 RSSI measurement accuracy on SCC with CCA

Configuration	Description
10.5.5.2-1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.5.5.2-2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 10.5.5.2.4.1-2.

Table 10.5.5.2.4.1-2: Initial conditions for EN-DC FR1 RSSI measurement accuracy on SCC with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.5.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 10.5.5.2.5-1.
2. Message contents are defined in clause 10.5.5.2.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is the NR cell (SCC) also with the power level set according to clauses C.1.2 and C.1.3 for this test.

10.5.5.2.4.2 Test procedure

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 SCC cell (Cell 3) on a different frequency than the PSCell. Both Cell 2 and Cell 3 are subject to CCA and transmit SSBs in DBT windows according to DL CCA model. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. Both Cell 2 (PCell) and Cell 3 (SCell) are configured on the UE.

2. Set the parameters according to Table 10.5.5.2.5-1 as appropriate.

3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform RSSI measurements in the target SCC frequency, according to the RMTC specified in section 10.5.5.2.4.3.

4. The UE shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 10.5.5.2.5-1.

5. The UE shall transmit periodical *MeasurementReport* messages.

6. After 10s wait from Step 5, the SS shall check the RSSI reported values in the periodic *MeasurementReport*. The RSSI value of Cell 3 reported by the UE is compared to the expected RSSI. If the value is outside the limits in Table 10.5.5.2.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

10.5.5.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.5.2.4.3-1: Common Exception messages for EN-DC FR1 RSSI measurement accuracy on SCC with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTER-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access H.3.10-2 with Condition SMTC.1

Table 10.5.5.2.4.3-2: *MeasResults* for EN-DC FR1 RSSI measurement accuracy on SCC under CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			

physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 10.5.5.2.4.3-3: *MeasResultForRSSI* for EN-DC FR1 RSSI measurement accuracy on SCC under CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
rssi-Result-r16	measResultRSSI	RSSI-Range-r16, integer (0..76)	RSSI

10.5.5.2.5 Test requirements

Table 10.5.5.2.5-1 defines the primary level settings including test tolerances for EN-DC FR1 RSSI measurement accuracy on SCC with CCA. Each RSSI measurement report shall meet the corresponding accuracy requirements in Table 10.5.5.2.5-3.

Table 10.5.5.2.5-1: Cell specific test parameters for EN-DC FR1 RSSI measurement accuracy on SCC with CCA

Parameter		Configurations	Unit	Test 1	
				Cell 2	Cell 3
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	0.9375 (Note 1, 3)
P_{CCA_UL}				1	0.75 / 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in D.7.2.1
UL CCA model				N/A	As specified in D.7.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					

EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table 10.5.5.2.5-2: EN-DC FR1 RSSI RMTC parameters for EN-DC FR1 RSSI measurement accuracy on SCC with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

Table 10.5.5.2.5-3: Requirements for the reported values for EN-DC FR1 RSSI measurement accuracy on SCC with CCA

Normal Conditions	**Test 1 All bands**
Lowest RSSI reported value	35
Highest RSSI reported value	49
Extreme Conditions	**Test 1 All bands**
Lowest RSSI reported value	32
Highest RSSI reported value	52
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1	

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

10.5.5.3 EN-DC FR1-FR1 RSSI measurement accuracy on a carrier with CCA

10.5.5.3.1 Test purpose

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.5.5.0.2 when both the serving cell and the target cell are subject to CCA.

10.5.5.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and supporting inter-frequency RRM and RSSI measurements on shared channel access.

10.5.5.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 10.5.5.0.2 for absolute accuracy.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.5.3.

10.5.5.3.4 Test description

Supported test configurations are shown in Table 10.5.5.3.4.1-1. Absolute accuracy of RSSI inter-frequency measurements are tested by using the parameters in Table 10.5.5.3.5-1. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.6B. In all test cases, Cell 2 is the PSCell, and Cell 3 is the target cell. The inter-frequency measurements are supported by a measurement gap.

10.5.5.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.5.3.4.1-1.

Table 10.5.5.3.4.1-1: Supported test configurations for EN-DC FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Configuration	Description
10.5.5.3-1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.5.5.3-2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 10.5.5.3.4.1-2.

Table 10.5.5.3.4.1-2: Initial conditions for EN-DC FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.5.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	

	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 10.5.5.3.5-1.
2. Message contents are defined in clause 10.5.5.3.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

10.5.5.3.4.2 Test procedure

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. Both Cell 2 and Cell 3 are subject to CCA and transmit SSBs in DBT windows according to DL CCA model. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 10.5.5.3.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform RSSI measurements in the target neighbouring frequency, according to the RMTC specified in section 10.5.5.3.4.3.
4. The UE shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 10.5.5.3.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the RSSI reported values in the periodic *MeasurementReport*. The RSSI value of Cell 3 reported by the UE is compared to the expected RSSI. If the value is outside the limits in Table 10.5.5.3.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G. 2.7 is achieved.

10.5.5.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.5.3.4.3-1: Common Exception messages for EN-DC FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern#0 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access H.3.10-2 with Condition SMTC.1

Table 10.5.5.3.4.3-2: *MeasResults* for EN-DC FR1 RSSI measurement accuracy on a carrier under CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 10.5.5.3.4.3-3: *MeasResultForRSSI* for EN-DC FR1 RSSI measurement accuracy on a carrier under CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
rssi-Result-r16	measResultRSSI	RSSI-Range-r16, integer (0..76)	RSSI

10.5.5.3.5 Test requirements

Table 10.5.5.3.5-1 defines the primary level settings including test tolerances for EN-DC FR1-FR1 RSSI measurement accuracy on a carrier with CCA. Each RSSI measurement report shall meet the corresponding accuracy requirements in Table 10.5.5.3.5-3.

Table 10.5.5.3.5-1: Cell specific test parameters for EN-DC FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Parameter		Configurations	Unit	Test 1	
				Cell 2	Cell 3
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA

P_{CCA_DL}			1	0.9375 (Note 1, 3)
P_{CCA_UL}			1	0.75 / 0.75 (Note 2, 3)
DL CCA model			N/A	As specified in D.7.2.1
UL CCA model			N/A	As specified in D.7.2.2
Measurement bandwidth		n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth		MHz	20	
DRX Cycle configuration		ms	Not Applicable	
PDSCH Reference measurement channel			SR.1.1 TDD	NA
RMSI CORESET Reference Channel			CR.1.1 TDD	NA
Dedicated CORESET Reference Channel			CCR.1.1 TDD	NA
OCNG Patterns			OP.1	NA
EPRE ratio of PSS to SSS		dB	0	NA
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				

Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 10.5.5.3.5-2: EN-DC FR1 RSSI RMTC parameters for EN-DC FR1-FR1 RSSI measurement accuracy on a carrier with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

Table 10.5.5.3.5-3: Absolute accuracy requirements for the reported values for EN-DC FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Normal Conditions	**Test 1** **All bands**
Lowest RSSI reported value	35
Highest RSSI reported value	49
Extreme Conditions	**Test 1** **All bands**
Lowest RSSI reported value	32
Highest RSSI reported value	52
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1	

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

10.5.6 Channel occupancy

10.5.6.0 Minimum Conformance Requirements

10.5.6.0.1 Intra-frequency channel occupancy measurement accuracy requirements in FR1

The UE shall be able to correctly evaluate the intra-frequency channel occupancy configured according to TS 38.331 [13], provided that the following conditions are met:

- All symbols during each RSSI measurement duration are available for RSSI sampling within the same reporting interval,
- RSSI at the UE receiver meets the following condition with respect to the configured *channelOccupancyThreshold* [13]:
  - RSSI at the UE receiver is below *channelOccupancyThreshold*- Δ_{RSSI}, or
  - RSSI at the UE receiver is above *channelOccupancyThreshold*+ Δ_{RSSI},
- where Δ_{RSSI} is the applicable RSSI measurement accuracy value from the RSSI measurement accuracy requirements specified in clause 10.5.5.0.1.

The channel occupancy measurement bandwidth is the same as the RSSI measurement bandwidth in Clause 10.5.5.0.1.

The normative reference for this requirement is TS.38.133 [6] clause 10.1.35.1.

10.5.6.0.2 Inter-frequency channel occupancy measurement accuracy requirements in FR1

The UE shall be able to correctly evaluate the inter-frequency channel occupancy configured according to TS 38.331 [13], provided that the following conditions are met:

- All symbols during each RSSI measurement duration are available for RSSI sampling within the same reporting interval,
- RSSI at the UE receiver meets the following condition with respect to the configured *channelOccupancyThreshold* [2]:
  - RSSI at the UE receiver is below *channelOccupancyThreshold*- Δ_{RSSI}, or
  - RSSI at the UE receiver is above *channelOccupancyThreshold*+ Δ_{RSSI},
- where Δ_{RSSI} is the applicable RSSI measurement accuracy value from the RSSI measurement accuracy requirements specified in clause 10.5.5.0.2.

The channel occupancy measurement bandwidth is the same as the RSSI measurement bandwidth in Clause 10.5.5.0.2.

The normative reference for this requirement is TS.38.133 [6] clause 10.1.35.2.

10.5.6.1 EN-DC FR1 Channel occupancy measurement accuracy on PSCC with CCA

10.5.6.1.1 Test purpose

The purpose of this test is to verify that Channel occupancy measurement accuracy for PSCC is within the specified limits. This test will partially verify the Channel occupancy measurement accuracy requirements in clause 10.5.6.0.1 when the PSCC is subject to CCA.

10.5.6.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and supporting RRM and Channel occupancy measurements on shared channel access.

10.5.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 10.5.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.6.1.

10.5.6.1.4 Test description

10.5.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.6.1.4.1-1.

Table 10.5.6.1.4.1-1: Supported test configurations for EN-DC FR1 Channel occupancy measurement accuracy on PSCC with CCA

Test Case ID	Description
10.5.6.1-1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.5.6.1-2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Configure the test equipment and the DUT according to the parameters in Table 10.5.6.1.4.1-2.

Table 10.5.6.1.4.1-2: Initial conditions for EN-DC FR1 Channel occupancy measurement accuracy on PSCC with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.6.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 10.5.6.1.5-1.
2. Message contents are defined in clause 10.5.6.1.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B.Cell 2 is the PSCell and is the target cell for Channel occupancy measurements. The connection setup is done according to the settings in clause C.1.2 and C.1.3.

10.5.6.1.4.2 Test procedure

In this set of test cases there are two cells, E-UTRAN PCell (Cell 1), FR1 PSCell under CCA (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 10.5.6.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform Channel occupancy measurements in DBT windows according to the RMTC specified in section 10.5.6.1.4.3.
4. The UE shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 10.5.6.1.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the Channel occupancy reported values in the periodic *MeasurementReport*. If the Channel occupancy value of Cell 2 reported by the UE is less than 100%, or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

10.5.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.6.1.4.3-1: Common Exception messages for EN-DC FR1 Channel occupancy measurement accuracy on PSCC with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI and channelOccupancyThreshold set to 18 (value of -83dBm) Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 10.5.6.1.4.3-2: *MeasResults* for EN-DC FR1 RSSI measurement accuracy for PSCC under CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 10.5.6.1.4.3-3: *MeasResultForRSSI* for EN-DC FR1 RSSI measurement accuracy for PSCC under CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
channelOccupancy-r16	measResultChannelOccupancy	Integer (0..100)	Channel_Occupancy

10.5.6.1.5 Test requirement

Table 10.5.6.1.5-1 defines the primary level settings including test tolerances for EN-DC FR1 Channel occupancy measurement accuracy on PSCC with CCA.

Table 10.5.6.1.5-1: Cell specific test parameters for EN-DC FR1 Channel occupancy measurement accuracy on PSCC with CCA

Parameter		Configurations	Unit	Test 1
				Cell 2
RF Channel Number				1
$BW_{channel}$			MHz	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA

	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA
P_{CCA_DL}				0.9375 (Note 1, 3)
P_{CCA_UL}				0.75 / 0.75 (Note 2, 3)
DL CCA model				As specified in D.7.2.1
UL CCA model				As specified in D.7.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth
Channel access bandwidth			MHz	20
DRX Cycle configuration			ms	Not Applicable
PDSCH Reference measurement channel				SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA
OCNG Patterns				OP.1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)			dB	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)			dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/measBW	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/measBW	-58.96
Propagation condition			-	AWGN
channelOccupancyThreshold			dBm	-83

Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 10.5.6.1.5-2: EN-DC FR1 Channel occupancy RMTC parameters for EN-DC FR1 Channel occupancy measurement accuracy on PSCC with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

The nominal reported *channelOccupancy* shall be 100%. For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

10.5.6.2 EN-DC FR1 Channel occupancy measurement accuracy on SCC with CCA

10.5.6.2.1 Test purpose

The purpose of this test is to verify that Channel occupancy measurement accuracy for SCC is within the specified limits. This test will partially verify the Channel occupancy measurement accuracy requirements in clause 10.5.6.0.1 when SCC is subject to CCA.

10.5.6.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and supporting RRM and Channel occupancy measurements on shared channel access.

10.5.6.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 10.5.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.6.2.

10.5.6.2.4 Test description

10.5.6.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.6.2.4.1-1.

Table 10.5.6.2.4.1-1: Supported test configurations for EN-DC FR1 Channel occupancy measurement accuracy on SCC with CCA

Configuration	Description
10.5.6.2-1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.5.6.2-2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 10.5.6.2.4.1-2.

Table 10.5.6.2.4.1-2: Initial conditions for EN-DC FR1 Channel occupancy measurement accuracy on SCC with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.6.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	

Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 10.5.6.2.5-1.
2. Message contents are defined in clause 10.5.6.2.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is the NR cell (SCC) also with the power level set according to clauses C.1.2 and C.1.3 for this test.

10.5.6.2.4.2 Test procedure

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 SCC cell (Cell 3) on a different frequency than the PSCell. Both Cell 2 and Cell 3 are subject to CCA and transmit SSBs in DBT windows according to DL CCA model. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 10.5.6.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform measurements in the target SCC frequency, according to the RMTC specified in section 10.5.6.2.4.3.
4. The UE shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 10.5.6.2.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the Channel occupancy reported values in the periodic *MeasurementReport*. If the Channel occupancy value of Cell 3 reported by the UE is less than 100%, or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

10.5.6.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.6.2.4.3-1: Common Exception messages for EN-DC FR1 Channel occupancy measurement accuracy on SCC with CCA

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI and channelOccupancyThreshold set to 18 (value of -83dBm) Table H.3.1-5 Table H.3.1-7 Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 10.5.6.2.4.3-2: *MeasResults* for EN-DC FR1 RSSI measurement accuracy on SCC under CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 10.5.6.2.4.3-3: *MeasResultForRSSI* for EN-DC FR1 RSSI measurement accuracy on SCC under CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
channelOccupancy-r16	measResultChannelOccupancy	Integer (0..100)	Channel_Occupancy

10.5.6.2.5 Test requirements

Table 10.5.6.2.5-1 defines the primary level settings including test tolerances for EN-DC FR1 Channel occupancy measurement accuracy on SCC with CCA.

Table 10.5.6.2.5-1: Cell specific test parameters for EN-DC FR1 Channel occupancy measurement accuracy on SCC with CCA

Parameter		Configurations	Unit	Test 1	
				Cell 2	Cell 3
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	0.9375 (Note 1, 3)
P_{CCA_UL}				1	0.75 / 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in D.7.2.1

UL CCA model			N/A	As specified in D.7.2.2
Measurement bandwidth		n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth		MHz	20	
DRX Cycle configuration		ms	Not Applicable	
PDSCH Reference measurement channel			SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel			CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel			CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns			OP.1	OP.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	

Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 10.5.6.2.5-2: EN-DC FR1 Channel occupancy RMTC parameters for EN-DC FR1 Channel occupancy measurement accuracy on SCC with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

The nominal reported *channelOccupancy* shall be 100%.

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

10.5.6.3 EN-DC FR1-FR1 Channel occupancy measurement accuracy on a carrier with CCA

10.5.6.3.1 Test purpose

The purpose of this test is to verify that the Channel occupancy measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.5.6.0.2 when both the serving cell and the target cell are subject to CCA.

10.5.6.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting EN-DC with a shared spectrum NR carrier and supporting inter-frequency RRM and Channel occupancy measurements on shared channel access.

10.5.6.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 10.5.6.0.2 for absolute accuracy.

The normative reference for this requirement is TS 38.133 [6] clause A.10.5.6.3.

10.5.6.3.4 Test description

Supported test configurations are shown in Table 10.5.6.3.4.1-1. Absolute accuracy of Channel occupancy inter-frequency measurements are tested by using the parameters in Table 10.5.6.3.5-1. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.6B. In all test cases, Cell 2 is the PSCell, and Cell 3 is the target cell. The inter-frequency measurements are supported by a measurement gap.

10.5.6.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 10.5.6.3.4.1-1.

Table 10.5.6.3.4.1-1: Supported test configurations for EN-DC FR1-FR1 Channel occupancy measurement accuracy on a carrier with CCA

Configuration	Description
10.5.6.3-1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
10.5.6.3-2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 10.5.6.3.4.1-2.

Table 10.5.6.3.4.1-2: Initial conditions for EN-DC FR1-FR1 Channel occupancy measurement accuracy on a carrier with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.8-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 10.5.6.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 10.5.6.3.5-1.
2. Message contents are defined in clause 10.5.6.3.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell) for the EN-DC setup. The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is the NR cell (PSCell) with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 3 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

10.5.6.3.4.2 Test procedure

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. Both Cell 2 and Cell 3 are subject to CCA and transmit SSBs in DBT windows according to DL CCA model. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity EN-DC, DC bearer MCG and SCG, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 10.5.6.3.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfiguration* message) on Cell 1 configuring the UE to perform measurements in the target neighbouring frequency, according to the RMTC specified in section 10.5.6.3.4.3.
4. The UE shall transmit an *RRCReconfiguration* message (embedded in *RRCConnectionReconfigurationComplete* message) to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 10.5.6.3.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the Channel occupancy reported values in the periodic *MeasurementReport*. If the Channel occupancy value of Cell 3 reported by the UE is less than 100%, or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

10.5.6.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 10.5.6.3.4.3-1: Common Exception messages for EN-DC FR1-FR1 Channel occupancy measurement accuracy on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI and channelOccupancyThreshold set to 18 (value of -83dBm) Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.4-1 Table H.3.4-1a Table H.3.4-2 Table H.3.4-4 with Condition gapUE Table H.3.4-5 with Condition Pattern#0 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 10.5.6.3.4.3-2: *MeasResults* for EN-DC FR1 RSSI measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 10.5.6.3.4.3-3: *MeasResultForRSSI* for EN-DC FR1 RSSI measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
channelOccupancy-r16	measResultChannelOccupancy	Integer (0..100)	Channel_Occupancy

10.5.6.3.5 Test requirements

Table 10.5.6.3.5-1 defines the primary level settings including test tolerances for EN-DC FR1-FR1 Channel occupancy measurement accuracy on a carrier with CCA.

Table 10.5.6.3.5-1: Cell specific test parameters for EN-DC FR1-FR1 Channel occupancy measurement accuracy on a carrier with CCA

Parameter	Configurations	Unit	Test 1	
			Cell 2	Cell 3
RF Channel Number			1	2
$BW_{channel}$		MHz	40	40

SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	0.9375 (Note 1, 3)
P_{CCA_UL}				1	0.75 / 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in D.7.2.1
UL CCA model				N/A	As specified in D.7.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 TDD	NA
RMSI CORESET Reference Channel				CR.1.1 TDD	NA
Dedicated CORESET Reference Channel				CCR.1.1 TDD	NA
OCNG Patterns				OP.1	NA
EPRE ratio of PSS to SSS			dB	0	NA
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI			dBm/measBW	-77.96	-58.96

measurement time configuration (RMTC)				
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table 10.5.6.3.5-2: EN-DC FR1 Channel occupancy RMTC parameters for EN-DC FR1-FR1 Channel occupancy measurement accuracy on a carrier with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

The nominal reported *channelOccupancy* shall be 100%.

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

11 NR Standalone Tests with NR PCell under CCA and Other NR Cells in FR1

11.0 General

11.0.1 Principle of testing for UE capable of EN-DC with only NR bands with shared spectrum access

Test cases in table 11.0.1-1 are defined for UE capable of NR SA operation with only NR band(s) with shared spectrum access and are not required for UE supporting also other NR band(s) (i.e. band with no shared spectrum access).

Table 11.0.1-1: Test cases applicable to UE supporting SA operation with only NR bands with shared spectrum access

Test category	Section	Test case
Active BWP switching	11.4.5.2.1	NR SA FR1 - NR FR1 DL active BWP switch of PCell under CCA with non-DRX
	11.4.5.2.2	NR SA FR1 DL active BWP switch with non-DRX under CCA
	11.4.5.3.1	NR SA FR1 DL active BWP switch of Cell with non-DRX under CCA

11.1 RRC_IDLE state mobility

11.1.1 Cell re-selection with both source and target NR carrier frequencies under CCA

11.1.1.0 Minimum conformance requirements

11.1.1.0.1 Minimum conformance requirements for intra-frequency cell re-selection with both source and target NR carrier frequencies under CCA

The UE shall be able to identify new intra-frequency cells with CCA and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS 38.304 [30] within T_{detect,NR_Intra_CCA} when that $T_{reselection}$= 0 . An intra frequency cell is considered to be detectable according to the conditions defined in 38.133 [6] Annex B.2.9 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra_CCA}$ (see table 11.1.1.0.1-1) for intra-frequency cells that are identified and measured according to the measurement rules. For a cell that is already identified, after 2 unsuccessful measurement attempts due to exceeding the maximum number of SMTC occasions not available at the UE, the UE shall detect cells on any of the configured serving- and/or non-serving carriers.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra_CCA}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS 38.304 [30] within $T_{evaluate,NR_Intra_CCA}$ when $T_{reselection}$ = 0 as specified in table 11.1.1.0.1-1 provided that:

when *rangeToBestCell* is not configured:

- the cell is at least 3dB better ranked in FR1 or 4.5 dB better ranked in FR2-2.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value [30] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
    - if there are multiple such cells, the cell has the highest rank among them.
        - the cell is at least 3dB better ranked in FR1 or 4.5 dB better ranked in FR2-2 if the current serving cell is among them.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the intra-frequency cell is satisfied with the reselection criteria, which are defined in TS38.304 [30], the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

Table 11.1.1.0.1-1: T_{detect,NR_Intra_CCA}, $T_{measure,NR_Intra_CCA}$ and $T_{evaluate,NR_Intra_CCA}$

DRX cycle length [s]	Scaling Factor (N1)		T_{detect,NR_Intra_CCA} [s] (number of DRX cycles)	$T_{measure,NR_Intra_CCA}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_CCA}$ [s] (number of DRX cycles)
	FR1	FR2-2 Note 5			

0.32	1	12	0.32xN1x(36+M_d)xM2 {(36+M_d)xN1xM2}	0.32xN1x(4+M_m)xM2 {(4+M_m)xN1 xM2	0.32xN1x(16+M_e) x M2 {(16+M_e)xN1xM2}
0.64		8	0.64xN1x(28+M_d) {(28+M_d)xN1 }	0.64xN1x(2+M_m) {(2+M_m)xN1 }	0.64xN1x(8+M_e) {(8+M_e)xN1 }
1.28		6	1.28xN1x(25+M_d) {(25+M_d)xN1 }	1.28xN1x(1+M_m) {(1+M_m)xN1 }	1.28xN1x(5+M_e) {(5+M_e)xN1 }
2.56		5	2.56xN1x(23+M_d) {(23+M_d)xN1 }	2.56xN1x(1+M_m) {(1+M_m)xN1 }	2.56xN1x(3+M_e) {(3+M_e)xN1 }
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.					
Note 2: Md, Mm, Me are the number of groups of consecutive N1 DRX cycles each group with at least one SMTC occasion not available during the T_{detect,NR_Intra_CCA}, $T_{measure,NR_Intra_CCA}$ and $T_{evaluate,NR_Intra_CCA}$, and $M_m \leq M_{m,max}$, $M_d \leq M_{d,max}$ and $M_e \leq M_{e,max}$					
Note 3: $M_{m,max}$ = 16 for DRX cycle length = 0.32s; $M_{m,max}$ = 8 for DRX cycle length = 0.64s; $M_{m,max}$ = 4 for DRX cycle length = 1.28s; $M_{m,max}$ = 4 for DRX cycle length = 2.56s.					
Note 4: $M_{d,max} = 4*M_{m,max}$, $M_{e,max} = 2*M_{m,max}$.					
Note 5: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.					

The UE shall restart the measurements upon exceeding $M_{m,max}$, $M_{d,max}$, or $M_{e,max}$.

The normative reference for this requirement is TS 38.133 [6] clause 4.2A.2.3.

11.1.1.0.2 Minimum conformance requirements for for inter-frequency cell re-selection with target NR carrier frequency under CCA

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 38.133 [6] clause 4.2A.2.7.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS 38.304 [30] within $K_{carrier} * T_{detect,NR_Inter} + K_{carrier_CCA} * T_{detect,NR_Inter_CCA}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection}$ = 0 provided that the reselection criteria is met by a margin of at least 5 dB in FR1 or 6.5dB in FR2-2 for reselections based on ranking or 6dB in FR1 or 7.5 dB in FR2-2 for SS-RSRP reselections based on absolute priorities or 4dB in FR1 and 4 dB in FR2-2 for SS-RSRQ reselections based on absolute priorities. The parameter $K_{carrier}$ is the number of NR inter-frequency carriers on licensed band and $K_{carrier_CCA}$ is the number of NR inter-frequency carriers on unlicensed band indicated by the serving cell. An inter-frequency cell is considered to be detectable according to the conditions defined in 38.133 [6] Annex B.2.10 for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter_CCA}$. If after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier} * T_{measure,NR_Inter} + K_{carrier_CCA} * T_{measure,NR_Inter_CCA}$ for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

For a cell that is already identified, after 2 unsuccessful measurement attempts due to exceeding the maximum number of SMTC occasions not available at the UE, the UE shall detect cells on any of the configured serving- and/or non-serving carriers.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter_CCA}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [30] within $K_{carrier} * T_{evaluate,NR_Inter} + K_{carrier_CCA} * T_{evaluate,NR_Inter_CCA}$ when $T_{reselection} = 0$ as specified in table 11.1.1.0.2-1 provided that the reselection criteria is met by

- the condition when performing equal priority reselection and

  when *rangeToBestCell* is not configured:

  - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2-2 or.

  when *rangeToBestCell* is configured:

  - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.

    - if there are multiple such cells, the cell has the highest rank among them

  - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2-2 if the current serving cell is among them. or

- 6dB in FR1 or 7.5dB in FR2-2 for SS-RSRP reselections based on absolute priorities or

- 4dB in FR1 or 4dB in FR2-2 for SS-RSRQ reselections based on absolute priorities.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{reselection}$ timer has a non zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 11.1.1.0.2-1 under the following conditions:

- $T_{SMTC_intra} = T_{SMTC_inter} = 160$ ms; where T_{SMTC_intra} and T_{SMTC_inter} are periodicities of the SMTC occasions configured for the intra-frequency carrier and the inter-frequency carrier respectively, and

- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and

- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion [30].

Table 11.1.1.0.2-1: T_{detect,NR_Inter_CCA}, $T_{measure,NR_Inter_CCA}$ and $T_{evaluate,NR_Inter_CCA}$

DRX cycle length [s]	Scaling Factor (N1)		T_{detect,NR_Inter_CCA} [s] (number of DRX cycles)	$T_{measure,NR_Inter_CCA}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_CCA}$ [s] (number of DRX cycles)
	FR1	FR2-2 Note 5			
0.32	1	12	0.32xN1x(36+M_d)xM2 {(36+M_d)xN1xM2}	0.32xN1x(4+M_m) xM2 {(4+M_m)xN1xM2}	0.32xN1x(16+M_e) x M2 {(16+M_e)xN1 xM2}
0.64		8	0.64xN1x(28+M_d) {(28+M_d)xN1 }	0.64xN1x(2+M_m) {(2+M_m)xN1 }	0.64xN1x(8+M_e) {(8+M_e)xN1 }
1.28		6	1.28xN1x(25+M_d) {(25+M_d)xN1 }	1.28xN1x(1+M_m) {(1+M_m)xN1 }	1.28xN1x(5+M_e) {(5+M_e)xN1}
2.56		5	2.56xN1x(23+M_d) {(23+M_d)xN1 }	2.56xN1x(1+M_m) {(1+M_m)xN1 }	2.56xN1x(3+M_e) {(3+M_e)xN1}

Note 1:	M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.
Note 2:	Md, Mm, Me are the number of groups of consecutive N1 DRX cycles each group with at least one SMTC occasion not available at the UE during T_{detect,NR_Inter_CCA}, $T_{measure,NR_Inter_CCA}$ and $T_{evaluate,NR_Inter_CCA}$, and $M_m \leq M_{m,max}$, $M_d \leq M_{d,max}$ and $M_e \leq M_{e,max}$
Note 3:	$M_{m,max}$ = 16 for DRX cycle length = 0.32s; $M_{m,max}$ = 8 for DRX cycle length = 0.64s; $M_{m,max}$ = 4 for DRX cycle length = 1.28s; $M_{m,max}$ = 4 for DRX cycle length = 2.56s
Note 4:	$M_{d,max} = 4*M_{m,max}$, $M_{e,max} = 2*M_{m,max}$.
Note 5:	Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.

The UE shall restart the measurements upon exceeding Mm,max, Md.max, or Me,max.

The normative reference for this requirement is TS 38.133 [6] clause 4.2A.2.4.

11.1.1.1 NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell

11.1.1.1.1 Test purpose

The purpose of this test is to verify that UE can meet the intra frequency NR cell reselection requirements specified in clause 11.1.1.0.1 when both the serving and target cells are subject to CCA.

11.1.1.1.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.1.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.1.1.1.

11.1.1.1.4 Test description

11.1.1.1.4.1 Initial conditions

This test shall be run in the configuration defined in Table 11.1.1.1.4.1-1.

Table 11.1.1.1.4.1-1: Supported test configurations for NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell

Configuration	Description
11.1.1.1-1	With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.1.1.1.4.1-2.

Table 11.1.1.1.4.1-2: Initial conditions for NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.	

1. The general test parameter settings are set up according to Table 11.1.1.1.4.1-3.

2. Message contents are defined in clause 11.1.1.1.4.3.

3. The test scenario comprises of 1 NR carrier and 2 cells that are subject to CCA. Cell 1 is the PCell and Cell 2 is the neighbor cell. Cell 1 and Cell 2 are configured according to Annex C.1.2 and C.1.3.

Table 11.1.1.1.4.1-3: General test parameters for NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
T2 end condition	Active cell		1	Cell2	
	Neighbour cells		1	Cell1	
Final condition	Active cell		1	Cell1	
RF Channel Number			1	1	
Time offset between cells			1	3 μs	Synchronous cells
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration	Semi-static channel access		1	SSB.1 CCA	(As defined in clause A.3A.1)
	Dynamic channel access			SSB.2 CCA	
DBT Window Configuration			1	DBT.1	As specified in clause A.12.1.
SMTC confituration				SMTC.1	
DL CCA model			1	As specified in clause D.7.2.1	
UL CCA model			1	As specified in clause D.7.2.2	
DRX cycle length		s	1	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			1	Not configured	
T1		s	1	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	1	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	1	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

11.1.1.1.4.2 Test procedure

Two cells are deployed in the test, FR1 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency both of which are subject to CCA. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Set Cell 2 physical cell identity = initial cell 2 physical cell identity.

2. Set the parameters according to T1 in Table 11.1.1.1.5-1. The SS shall enable DL and UL CCA model according to Table 11.1.1.1.5-1. T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for one iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.1.1.1.5-1. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 54 seconds from the beginning of time period T2, then count a success for the event “Re-select newly detected Cell 2”. Otherwise count a failure for the event “Re-select newly detected Cell 2”.

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 12.

7a The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 11.1.1.1.5-1. T3 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

10. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 18 seconds from the beginning of time period T3, then count a success for the event “Re-select already detected Cell 1”. Otherwise count a failure for the event “Re-select already detected Cell 1”.

11. If the UE has re-selected Cell 1 within T3, after the re-selection or when T3 expires, continue with step 11a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 12.

11a.The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

12. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 in Cell 1. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

13. Repeat step 2-12 until a test verdict has been achieved.
    Each of the events “Re-select newly detected Cell 2” and “Re-select already detected Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Annex G clause G.2.7 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

11.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.1.1.1.4.3-1: Common Exception messages NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.1.1.1.4.3-2: SIB1 (Cell 1 and Cell 2) for NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-64	-128 is actual value in dBm (-64 * 2 +1 dBm)	
}			
}			

Table 11.1.1.1.4.3-3: SIB2 (Cell 1 and Cell 2) for NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell

Derivation Path: Table H.2.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
q-RxLevMin	-64	Actual value is -64*2 = -128dBm	
deriveSSB-IndexFromCell	true		
}			
}			

11.1.1.1.5 Test requirement

Table 11.1.1.1.5-1 defines the primary level settings including test tolerances for intra frequency NR cell re-selection test case.

Table 11.1.1.1.5-1: Cell specific test parameters for NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1	0.9			0.9		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1	0.75			0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1	0.5			0.5		
UL CCA probability P_{CCA_UL}		1	1			1		
$M_{d,max}$		1	16			16		
$M_{m,max}$		1	4			4		

$M_{e,max}$		1	8			8			
PDSCH RMC		1	SR.1.1 CCA			SR.1.1 CCA			
RMSI CORESET		1	CR.1.1 CCA			CR.1.1 CCA			
Dedicated CORESET		1	CCR.1.1 CCA			CCR.1.1 CCA			
OCNG Pattern		1	OP.1			OP.1			
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1			
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1			
RLM-RS		1	SSB			SSB			
Qrxlevmin	dBm/SCS	1	-127			-127			
Pcompensation	dB	1	0			0			
$Qhyst_s$	dB	1	0			0			
$Qoffset_{s,n}$	dB	1	0			0			
Cell_selection_and_ reselection_quality_measurement		1	SS-RSRP			SS-RSRP			
$\hat{E}_s / I_{ot}$	dB	1	16	-3.55	3.24	-infinity	3.24	-3.55	
N_{oc} Note2	dBm/SCS	1	-95						
N_{oc} Note2	dBm/15 kHz	1	-98						
$\hat{E}_s / N_{oc}$	dB	1	16	13	16.45	-infinity	16.45	13	
SS-RSRP Note3	dBm/SCS	1	-79	-82	-78.54	-infinity	-78.54	-82	
Io	dBm/38.16 MHz	1	-47.84	-45.81	-45.81	Same as parameters specified in Cell 1 columns-			
Treselection	s	1	0	0	0	0	0	0	
SintrasearchP	dB	1	50			50			
Propagation Condition		1	AWGN						

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

The The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than $(25 + M_d)*1.28 + T_{SI_CCA}$ s. M_d is the number of DRX cycles with at least one SMTC where there are no SSBs available during the T_{detect,NR_Intra_CCA}. If $M_d > M_{d,max}$ the UE is required to restart the detection of Cell 2.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than $(5+M_e)*1.28 + T_{SI_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of Cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra_CCA} + T_{SI_CCA}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_ intra_CCA} + T_{SI_CCA}$,

Where:

- T_{detect, NR_Intra_CCA} See Table 11.1.1.0.1-1 in clause 11.1.1.0.1
- $T_{evaluate, NR_ intra_CCA}$ See Table 11.1.1.0.1-1 in clause 11.1.1.0.1
- T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

This gives a total of $(25 + M_d)*1.28 + T_{SI_CCA}$ s for the cell re-selection delay to a newly detectable cell and $(5+M_e)*1.28 + T_{SI_CCA}$ s for the cell re-selection delay to an already detected cell in the test case.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

11.1.1.2 NR SA FR1 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell

11.1.1.2.1 Test purpose

The purpose of this test is to verify that UE can meet the inter frequency NR cell reselection requirements specified in clause 11.1.1.0.2 when both the serving and target cells are subject to CCA.

11.1.1.2.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.1.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.1.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.1.1.2.

11.1.1.2.4 Test description

11.1.1.2.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 11.1.1.2.4.1-1.

Table 11.1.1.2.4.1-1: Supported test configurations for NR SA FR1 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell

Configuration	Description of cell 1 with CCA	Description of cell 2 with CCA
11.1.1.2-1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.1.1.2.4.1-2.

Table 11.1.1.2.4.1-2: Initial conditions for NR SA FR1 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.

Connection Diagram	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.1.1.2.4.1-3.

2. Message contents are defined in clause 11.1.1.2.4.3.

3. The test scenario comprises of 2 cells on 2 different NR carriers that are subject to CCA. Cell 2 is the PCell and Cell 1 is the neighbour cell in a different carrier than cell 2. Cell 1 and Cell 2 are configured according to Annex C.1.2 and C.1.3.

Table 11.1.1.2.4.1-3: General test parameters for NR SA FR1 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
T1 end condition	Active cell		1	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1	Cell2	
T3 end condition	Active cell		1	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
RF Channel Number			1	1, 2	
Time offset between cells			1	3 µs	Synchronous cells
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration	Semi-static channel access		1	SSB.1 CCA	(As defined in clause A.3A.1)
	Dynamic channel access			SSB.2 CCA	
DBT Window Configuration			1	DBT.1	As specified in clause A.12.1.
SMTC configuration			1	SMTC.1	
DL CCA model			1	As specified in clause D.7.2.1	
UL CCA model			1	As specified in clause D.7.2.2	
DRX cycle length		s	1	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			1	Not configured	
T1		s	1	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	1	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

11.1.1.2.4.2 Test procedure

Two cells are deployed in the test, FR1 NR PCell (Cell 2) and an NR neighbour cell (Cell 1) on different frequencies both of which are subject to CCA. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

2. Set the parameters according to T1 in Table 11.1.1.2.5-1. The SS shall enable DL and UL CCA model according to Table 11.1.1.1.5-1. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, Cell 1.

4. If the UE responds on lower priority cell, Cell 1 during time duration T1 within 18 seconds from the beginning of time period T1, then count a success for the event “Re-select lower priority Cell 1”. Otherwise count a fail for the event “Re-select lower priority Cell 1”.

5. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 5a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.

5a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 11.1.1.2.5-1. T2 starts. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) shall be changed to ensure Cell 2 is not detected by the UE.

7. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 11.1.1.2.5-1. T3 starts.

8. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, Cell 2.

9. If the UE responds on higher priority cell, Cell 2 during time duration T3 within 78 seconds from the beginning of time period T3, then count a success for the event “Re-select higher priority Cell 2”. Otherwise count a fail for the event “Re-select higher priority Cell 2”.

10. If the UE has re-selected Cell 2 within T3, after the re-selection or when T3 expires, continue with step 10a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11.

10a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 on Cell 2. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

12. Repeat step 2-11 until a test verdict has been achieved.
    Each of the events “Re-select lower priority Cell 1” and “Re-select higher priority Cell 2” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Annex G clause G.2.7 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

11.1.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.1.1.2.4.3-1: Common Exception messages for NR SA FR1 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.2-1 Table H.2.2-2 with Condition synchronous cells Table H.2.2-3
Default RRC messages and information elements contents exceptions	Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

11.1.1.2.5 Test requirement

Table 11.1.1.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell.

Table 11.1.1.2.5-1: Cell specific test parameters for NR SA FR1 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1	0.9			0.9		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1	0.75			0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1	0.5			0.5		
UL CCA probability P_{CCA_UL}		1	1			1		
$M_{d,max}$		1	16			16		
$M_{m,max}$		1	4			4		
$M_{e,max}$		1	8			8		
PDSCH RMC		1	SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET		1	CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET		1	CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		1	OP.1			OP.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-137			-137		
Pcompensation	dB	1	0			0		
$Qhyst_s$	dB	1	0			0		
$Qoffset_{s,n}$	dB	1	0			0		
Cell_selection_and_reselection_quality_measurement		1	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	15.6	15.6	15.6	-3.6	-infinity	13.6
N_{oc} Note2	dBm/SCS	1	-95			-97	-95	-95
N_{oc} Note2	dBm/15 kHz	1	-98			-100	-98	-98

$\hat{E}_s / N_{oc}$	dB	1	15.6	15.6	15.6	-3.6	-infinity	13.6
SS-RSRP Note3	dBm/SCS	1	-79.39	-79.39	-79.39	-100.59	-infinity	-81.39
Io	dBm/Ch BW	1	-48.23	-48.23	-48.23	-67.38	-66.96	-53.17
Treselection	s	1	0	0	0	0	0	0
SnonintrasearchP	dB	1	50			50		
$Thresh_{x, high}$	dB	1	48			48		
$Thresh_{serving, low}$	dB	1	44			44		
$Thresh_{x, low}$	dB	1	50			50		
Propagation Condition		1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than $60 + 1.28 \times (5 + M_e) + T_{SI_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of cell 2.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell shall be less than $1.28 \times (5 + M_e) + T_{SI_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate,\ NR_inter_CCA} + T_{SI_CCA}$, and to a lower priority cell can be expressed as: $T_{evaluate,\ NR_\ inter_CCA} + T_{SI_CCA}$,

Where:

- $T_{higher_priority_search}$ See clause 4.2.2.7 of TS 38.133 [6]
- $T_{evaluate,\ NR_\ inter_CCA}$ See Table 11.1.1.0.2-1 in clause 11.1.1.0.2
- T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

This gives a total of $60 + 1.28 \times (5 + M_e) + T_{SI_CCA}$ s for the cell re-selection delay to a higher priority cell and $1.28 \times (5 + M_e) + T_{SI_CCA}$ s for the cell re-selection delay to a lower priority cell in the test case.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

11.1.2 Cell re-selection to NR with source NR carrier frequency under CCA

11.1.2.0 Minimum conformance requirements

The requirements in this sections apply as follows:

- When the target cell is an NR cell operating in a carrier frequency under CCA, there requirements are same as section 11.1.1.0.
- When the target cell is an NR cell operating in a carrier frequency which is not under CCA, there requirements are same as section 6.1.1.0.

11.1.2.1 NR SA FR1 Cell re-selection to NR with source NR carrier frequency under CCA

11.1.2.1.1 Test purpose

The purpose of this test is to verify the inter frequency NR cell reselection requirements specified in clause 11.1.2.0 when only the serving cell is subject to CCA.

11.1.2.1.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, SSB-based RRM, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.1.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.1.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.11.1.2.1.

11.1.2.1.4 Test description

11.1.2.1.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 11.1.2.1.4.1-1.

Table 11.1.2.1.4.1-1: Supported test configurations for NR SA FR1 Cell re-selection to NR with source NR carrier frequency under CCA

Configuration	Description of a cell with CCA	Description of a cell without CCA
11.1.2.1-1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
11.1.2.1-2	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
11.1.2.1-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 11.1.2.1.4.1-2.

Table 11.1.2.1.4.1-2: Initial conditions for NR SA FR1 Cell re-selection to NR with source NR carrier frequency under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.1.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.

Connection Diagram	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.1.2.1.4.1-3.

2. Message contents are defined in clause 11.1.2.1.4.3.

3. The test scenario comprises of 2 cells on 2 different NR carriers where the first carrier is subject to CCA. Cell 2 is the PCell subject to CCA and Cell 1 is the neighbour cell in a different carrier than cell 2. Cell 1 and Cell 2 are configured according to Annex C.1.2 and C.1.3.

Table 11.1.2.1.4.1-3: General test parameters for NR SA FR1 Cell re-selection to NR with source NR carrier frequency under CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 which is subject to CCA in the initial phase and during T1 period the UE reselects to cell 1 which is an inter-frequency NR cell
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	Cell 1: SSB.1 FR1 Cell 2: SSB.1 CCA for semi-static channel access; Cell 2: SSB.2 CCA for dynamic channel access	
			2	Cell 1: SSB.1 FR1 Cell 2: SSB.1 CCA for semi-static channel access; Cell 2: SSB.2 CCA for dynamic channel access	
			3	Cell 1: SSB.2 FR1 Cell 2: SSB.1 CCA for semi-static channel access; Cell 2: SSB.2 CCA for dynamic channel access	
SMTC configuration			1	Cell 1: SMTC pattern 2 Cell 2: SMTC.1	
			2	Cell 1: SMTC pattern 1 Cell 2: SMTC.1	
			3	Cell 1: SMTC pattern 1 Cell 2: SMTC.1	
DBT Window Configuration			1, 2, 3	Cell 1: N/A Cell 2: DBT.1	As specified in clause A.12.1.
DL CCA model			1, 2, 3	Cell 1: N/A Cell 2: As specified in clause D.7.2.1	

UL CCA model		1, 2, 3	Cell 1: N/A Cell 2: As specified in clause D.7.2.2	
DRX cycle length	s	1, 2, 3	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

11.1.2.1.4.2 Test procedure

Two cells are deployed in the test, FR1 NR PCell (Cell 2) and an NR neighbour cell (Cell 1) on different frequencies of which only cell 2 is subject to CCA. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. The CCA model for Cell 2 (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

2. Set the parameters according to T1 in Table 11.1.2.1.5-1. The SS shall enable DL and UL CCA model for cell 2 according to Table 11.1.2.1.5-1. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, Cell 1.

4. If the UE responds on lower priority cell, Cell 1 during time duration T1 within 8 seconds from the beginning of time period T1, then count a success for the event “Re-select lower priority Cell 1”. Otherwise count a fail for the event “Re-select lower priority Cell 1”.

5. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 5a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.

5a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 11.1.2.1.5-1. T2 starts. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) shall be changed to ensure Cell 2 is not detected by the UE.

7. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 11.1.2.1.5-1. T3 starts.

8. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, Cell 2.

9. If the UE responds on higher priority cell, Cell 2 during time duration T3 within [76.64 + T_{SI_CCA}] seconds from the beginning of time period T3, then count a success for the event "Re-select higher priority Cell 2". Otherwise count a fail for the event "Re-select higher priority Cell 2".

10. If the UE has re-selected Cell 2 within T3, after the re-selection or when T3 expires, continue with step 10a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11.

10a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 on Cell 2. The SS shall disable the CCA model for Cell 2 (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

12. Repeat step 2-11 until a test verdict has been achieved.
    Each of the events "Re-select lower priority Cell 1" and "Re-select higher priority Cell 2" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Annex G clause G.2.7 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

11.1.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.1.2.1.4.3-1: Common Exception messages for NR SA FR1 Cell re-selection to NR with source NR carrier frequency under CCA

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.2-1 Table H.2.2-2 with Conditions SSB.1 FR1, SMTC.2 and Asynchronous cells for configuration 11.1.2.1-1 and Cell 1 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.1 and Synchronous cells for configuration 11.1.2.1-2 and Cell 1 Table H.2.2-2 with Condition SSB.2 FR1, SMTC.1 and synchronous cells for configuration 11.1.2.1-3 and Cell 1 Table H.2.2-3
Default RRC messages and information elements contents exceptions	Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

11.1.2.1.5 Test requirement

Table 11.1.2.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 Cell re-selection to NR with source NR carrier frequency under CCA.

Table 11.1.2.1.5-1: Cell specific test parameters for NR SA FR1 Cell re-selection to NR with source NR carrier frequency under CCA

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			TDDConf.1.1.CCA		
		2	TDDConf.1.1			TDDConf.1.1.CCA		
		3	TDDConf.2.1			TDDConf.1.1.CCA		

DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2, 3	N/A			0.9			
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2, 3	N/A			0.75			
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2, 3	N/A			0.5			
UL CCA probability P_{CCA_UL}		1, 2, 3	N/A			1			
$M_{d,max}$		1, 2, 3	N/A			16			
$M_{m,max}$		1, 2, 3	N/A			4			
$M_{e,max}$		1, 2, 3	N/A			8			
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 CCA			
		2	SR.1.1 TDD			SR.1.1 CCA			
		3	SR.2.1 TDD			SR.1.1 CCA			
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 CCA			
		2	CR.1.1 TDD			CR.1.1 CCA			
		3	CR.2.1 TDD			CR.1.1 CCA			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 CCA			
		2	CCR.1.1 TDD			CCR.1.1 CCA			
		3	CCR.2.1 TDD			CCR.1.1 CCA			
OCNG Pattern		1, 2, 3	OP.1			OP.1			
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1			
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1			
RLM-RS		1, 2, 3	SSB			SSB			
Qrxlevmin	dBm/SCS	1, 2	-140			-137			
		3	-137			-137			
Pcompensation	dB	1, 2, 3	0			0			
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP			
$\hat{E}_s / I_{ot}$	dB	1	15.6	15.6	15.6	-3.6	-infinity	13.6	
		2							
		3							
N_{oc} Note2	dBm/SCS	1	-98			-100.00	-98.00	-98.00	
		2	-98			-100.00	-98.00	-98.00	
		3	-95			-97.00	-95.00	-95.00	
N_{oc} Note2	dBm/15 kHz	1	-98			-100.00	-98.00	-98.00	
		2							
		3							
$\hat{E}_s / N_{oc}$	dB	1	15.6	15.6	15.6	-3.6	-infinity	13.6	
		2							
		3							
SS-RSRP Note3	dBm/SCS	1	-82.4	-82.4	-82.4	-100.59	-infinity	-81.39	
		2	-82.4	-82.4	-82.4	-100.59	-infinity	-81.39	
		3	-79.39	-79.39	-79.39	-100.59	-infinity	-81.39	
Io	dBm/Ch BW	1	-54.33	-54.33	-54.33	-67.38	-66.96	-53.17	
	dBm/Ch BW	2	-54.33	-54.33	-54.33	-67.38	-66.96	-53.17	
	dBm/Ch BW	3	-48.23	-48.23	-48.23	-67.38	-66.96	-53.17	
Treselection	s	1, 2, 3	0	0	0	0	0	0	
SnonintrasearchP	dB	1, 2, 3	50			50			
$Thresh_{x, highP}$	dB	1, 2, 3	48			48			
$Thresh_{serving, lowP}$	dB	1, 2, 3	44			44			
$Thresh_{x, lowP}$	dB	1, 2, 3	50			50			

Propagation Condition		1, 2, 3	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 60 + 1.28 x (5 + M_e) + T_{SI_CCA} s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of cell 2.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search}$ + $T_{evaluate,\ NR_inter_CCA}$ + T_{SI_CCA}, and to a lower priority cell can be expressed as: $T_{evaluate,\ NR_inter}$ + $T_{SI\text{-}NR}$.

Where:

- $T_{higher_priority_search}$ See clause 4.2.2.7 of TS 38.133 [6]
- $T_{evaluate,\ NR_inter_CCA}$ See Table 11.1.1.0.2-1 in clause 11.1.1.0.2
- T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.
- $T_{evaluate,\ NR_inter}$ See Table 6.1.1.0.2-1 in clause 6.1.1.0.2.
- $T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test cases.

This gives a total of 60 + 1.28 x (5 + M_e) + T_{SI_CCA} s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

11.1.3 Cell re-selection from NR carrier with target NR carrier frequency under CCA

11.1.3.0 Minimum conformance requirements

The requirements in this sections apply as follows:

- When the target cell is an NR cell operating in a carrier frequency under CCA, there requirements are same as section 11.1.1.0.
- When the target cell is an NR cell operating in a carrier frequency which is not under CCA, there requirements are same as section 6.1.1.0.

11.1.3.1 NR SA FR1 Cell re-selection from NR carrier with target NR carrier frequency under CCA

11.1.3.1.1 Test purpose

The purpose of this test is to verify the inter frequency NR cell reselection requirements specified in clause 11.1.1.0.2 when the target cell is subject to CCA.

11.1.3.1.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.1.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.1.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.1.3.1.

11.1.3.1.4 Test description

11.1.3.1.4.1 Initial conditions

This test shall be run in one of the configurations defined in Table 11.1.3.1.4.1-1.

Table 11.1.3.1.4.1-1: Supported test configurations for NR SA FR1 Cell re-selection from NR carrier with target NR carrier frequency under CCA

Configuration	Description of a cell without CCA	Description of a cell with CCA
11.1.3.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
11.1.3.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
11.1.3.1-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 11.1.3.1.4.1-2.

Table 11.1.3.1.4.1-2: Initial conditions for NR SA FR1 Cell re-selection from NR carrier with target NR carrier frequency under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.1.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.1.3.1.4.1-3.

2. Message contents are defined in clause 11.1.3.1.4.3.

3. The test scenario comprises of 2 cells on 2 different NR carriers. Cell 2 is the NR PCell and Cell 1 is the neighbour cell subject to CCA in a different carrier than Cell 2. Cell 1 and Cell 2 are configured according to Annex C.1.2 and C.1.3.

Table 11.1.3.1.4.1-3: General test parameters for NR SA FR1 Cell re-selection from NR carrier with target NR carrier frequency under CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 which is an inter-frequency NR cell in the initial phase and during T1 period the UE reselects to cell 1 which is cell subject to CCA
	Neighbour cell		1, 2, 3	Cell 1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3	Cell 1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access; Cell 2: SSB.1 FR1	
			2	Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access; Cell 2: SSB.1 FR1	
			3	Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access; Cell 2: SSB.2 FR1	
SMTC configuration			1	Cell 1: SMTC.1 Cell 2: SMTC.2	
			2	Cell 1: SMTC.1 Cell 2: SMTC.1	
			3	Cell 1: SMTC.1 Cell 2: SMTC.1	
DBT Window Configuration			1, 2, 3	Cell 1: DBT.1 Cell 2: N/A	As specified in clause A.12.1.
DL CCA model			1, 2, 3	Cell 1: As specified in clause D.7.2.1 Cell 2: N/A	
UL CCA model			1, 2, 3	Cell 1: As specified in clause D.7.2.2 Cell 2: N/A	
DRX cycle length		s	1, 2, 3	1.28	The value shall be used for all cells in the test.

PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

11.1.3.1.4.2 Test procedure

Two cells are deployed in the test, FR1 NR PCell (Cell 2) and an NR neighbour cell (Cell 1) on different frequencies of which only cell 1 is subject to CCA. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. The CCA model for Cell 1 (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

2. Set the parameters according to T1 in Table 11.1.3.1.5-1. The SS shall enable DL and UL CCA model for cell 1 according to Table 11.1.3.1.5-1. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, Cell 1.

4. If the UE responds on lower priority cell, Cell 1 during time duration T1 within [16.64 + T_{SI_CCA}] seconds from the beginning of time period T1, then count a success for the event “Re-select lower priority Cell 1”. Otherwise count a fail for the event “Re-select lower priority Cell 1”.

5. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 5a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.

5a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 11.1.3.1.5-1. T2 starts. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) shall be changed to ensure Cell 2 is not detected by the UE.

7. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 11.1.3.1.5-1. T3 starts.

8. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, Cell 2.

9. If the UE responds on higher priority cell, Cell 2 during time duration T3 within 68 seconds from the beginning of time period T3, then count a success for the event “Re-select higher priority Cell 2”. Otherwise count a fail for the event “Re-select higher priority Cell 2”.

10. If the UE has re-selected Cell 2 within T3, after the re-selection or when T3 expires, continue with step 10a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11.

10a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 on Cell 2. The SS shall disable the CCA model for Cell 1 (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

12. Repeat step 2-11 until a test verdict has been achieved.
    Each of the events "Re-select lower priority Cell 1" and "Re-select higher priority Cell 2" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Annex G clause G.2.7 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

11.1.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.1.3.1.4.3-1: Common Exception messages for NR SA FR1 Cell re-selection from NR carrier with target NR carrier frequency under CCA

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.2-1 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.2 and Asynchronous cells for configuration 11.1.3.1-1 and Cell 2 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.1 and Synchronous cells for configuration 11.1.3.1-2 and Cell 2 Table H.2.2-2 with Condition SSB.2 FR1, SMTC.1 and Synchronous cells for configuration 11.1.3.1-3 and Cell 2 Table H.2.2-3
Default RRC messages and information elements contents exceptions	Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

11.1.3.1.5 Test requirement

Table 11.1.3.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 Cell re-selection from NR carrier with target NR carrier frequency under CCA.

Table 11.1.3.1.5-1: Cell specific test parameters for NR SA FR1 Cell re-selection from NR carrier with target NR carrier frequency under CCA

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	TDDConf.1.1.CCA			N/A		
		2	TDDConf.1.1.CCA			TDDConf.1.1		
		3	TDDConf.1.1.CCA			TDDConf.2.1		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2, 3	0.9			N/A		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2, 3	0.75			N/A		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2, 3	0.5			N/A		

UL CCA probability P_{CCA_UL}		1, 2, 3	1			N/A			
$M_{d,max}$		1, 2, 3	16			N/A			
$M_{m,max}$		1, 2, 3	4			N/A			
$M_{e,max}$		1, 2, 3	8			N/A			
PDSCH RMC configuration		1	SR.1.1 CCA			SR.1.1 FDD			
		2	SR.1.1 CCA			SR.1.1 TDD			
		3	SR.1.1 CCA			SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 CCA			CR.1.1 FDD			
		2	CR.1.1 CCA			CR.1.1 TDD			
		3	CR.1.1 CCA			CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 CCA			CCR.1.1 FDD			
		2	CCR.1.1 CCA			CCR.1.1 TDD			
		3	CCR.1.1 CCA			CCR.2.1 TDD			
OCNG Pattern		1, 2, 3	OP.1			OP.1			
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1			
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1			
RLM-RS		1, 2, 3	SSB			SSB			
Qrxlevmin	dBm/SCS	1, 2	-137			-140			
		3	-137			-137			
Pcompensation	dB	1, 2, 3	0			0			
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP			
$\hat{E}_s/I_{ot}$	dB	1	15.6	15.6	15.6	-3.6	-infinity	13.6	
		2							
		3							
N_{oc} Note2	dBm/SCS	1	-95			-100.00	-98.00	-98.00	
		2	-95			-100.00	-98.00	-98.00	
		3	-95			-97.00	-95.00	-95.00	
N_{oc} Note2	dBm/15 kHz	1	-98			-100.00	-98.00	-98.00	
		2							
		3							
$\hat{E}_s/N_{oc}$	dB	1	15.6	15.6	15.6	-3.6	-infinity	13.6	
		2							
		3							
SS-RSRP Note3	dBm/SCS	1	-79.39	-79.39	-79.39	-103.6	-infinity	-84.4	
		2	-79.39	-79.39	-79.39	-103.6	-infinity	-84.4	
		3	-79.39	-79.39	-79.39	-100.59	-infinity	-81.39	
Io	dBm/Ch BW	1	-48.23	-48.23	-48.23	-70.48	-70.05	-56.26	
	dBm/Ch BW	2	-48.23	-48.23	-48.23	-70.48	-70.05	-56.26	
	dBm/Ch BW	3	-48.23	-48.23	-48.23	-67.38	-66.96	-53.17	
Treselection	s	1, 2, 3	0	0	0	0	0	0	
SnonintrasearchP	dB	1, 2, 3	50			50			
$Thresh_{x, highP}$	dB	1, 2, 3	48			48			
$Thresh_{serving, lowP}$	dB	1, 2, 3	44			44			
$Thresh_{x, lowP}$	dB	1, 2, 3	50			50			
Propagation Condition		1, 2, 3	AWGN						

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

1.28 x (5 + M_e) + T_{SI_CCA} s. Me is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search}$ + $T_{evaluate,\ NR_\ inter}$ + $T_{SI\text{-}NR}$, and to a lower priority cell can be expressed as: $T_{evaluate,\ NR_\ inter}$ + $T_{SI\text{-}NR}$.

Where:

- $T_{higher_priority_search}$ See clause 4.2.2.7 of TS 38.133 [6]
- $T_{evaluate,\ NR_\ inter_CCA}$ See Table 11.1.1.0.2-1 in clause 11.1.1.0.2
- T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.
- $T_{evaluate,\ NR_\ inter}$ See Table 6.1.1.0.2-1 in clause 6.1.1.0.2
- $T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 1.28 x (5 + M_e) + T_{SI_CCA} s for the cell re-selection delay to a lower priority cell in the test case.

The statistical pass/fail decisions are done separated for each event. For an event to pass, the total number of successful loops shall be more than 90% of the cases with a confidence level of 95%.

11.1.4 Inter-RAT cell re-selection to E-UTRAN with source NR carrier frequency under CCA

11.1.4.0 Minimum conformance requirements

11.1.4.0.1 Minimum conformance requirements for Inter-RAT cell re-selection to E-UTRAN with source NR carrier frequency under CCA

The requirements in clause 6.1.2.0.1 shall apply.

11.1.4.1 NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA

11.1.4.1.1 Test purpose

This test is to verify the requirement for the NR cell subject to CCA to E-UTRAN inter-RAT cell reselection requirements specified in clause 11.1.4.0.1 when the E-UTRAN cell is of higher priority.

11.1.4.1.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, and UL with a shared spectrum NR carrier.

11.1.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.1.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.1.4.1.

11.1.4.1.4 Test description

11.1.4.1.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 11.1.4.1.4.1-1.

Table 11.1.4.1.4.1-1: Supported test configurations for NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA

Configuration	Description of a cell with CCA	Description of a cell without CCA
11.1.4.1-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
11.1.4.1-2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test requirement and the DUT according to the parameters in Table 11.1.4.1.4.1-2.

Table 11.1.4.1.4.1-2: Initial conditions for NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.1.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.1.4.1.4.1-3.

2. Message contents are defined in clause 11.1.4.1.4.3.

3. The test scenario comprises of one NR cell which is subject to CCA and one E-UTRAN cell. Cell 1 is the NR PCell under CCA and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.2 and C.1.3, Cell 2 is configured according to Annex A.6B.1.

Table 11.1.4.1.4.1-3: General test parameters for NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
T2 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cells		1, 2	Cell1	
T3 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cells		1, 2	Cell2	
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.

SMTC configuration		1, 2	SMTC.1	
DBT Window Configuration		1, 2	DBT.1	As specified in clause A.12.1.
SSB configuration			Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access;	
DL CCA model		1, 2	As specified in clause D.7.2.1	
UL CCA model		1, 2	As specified in clause D.7.2.2	
DRX cycle length	s	1, 2	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
E-UTRAN PRACH configuration index		1	53	As specified in table 5.7.1-2 in TS 36.211 [24]
		2	4	
T1	s	1, 2	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2	s	1, 2	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

11.1.4.1.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) under CCA and an E-UTRA neighbour cell (Cell 2). The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. NR cell 1 is already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of higher priority than cell 1. The CCA model (both DL and UL) on Cell 1 is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

Before T1 the UE is camped on to cell 1. During T1, cell 2 shall be powered off. At the start of T2 the UE is expected to detect cell 2, send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2. At the start of T3 cell 2 becomes weaker than cell 1, and the UE reselects to Cell 1.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

2. Set the parameters according to T1 in Table 11.1.4.1.5-1 and 11.1.4.1.5-2. The SS shall enable DL and UL CCA model on Cell 1 according to Table 11.1.4.1.5-1. T1 starts.

3. During T1, Cell 2 shall be powered off and set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for one iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.1.4.1.5-1 and 11.1.4.1.5-2. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a higher priority cell, Cell 2.

6. If the UE responds on Cell 2 during time duration T2 within 68 seconds from the beginning of time period T2, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11.

7a The SS shall send an *RRCConnectionRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 11.1.4.1.5-1 and 11.1.4.1.5-2. T3 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to a lower priority cell, Cell 1.

10. If the UE has re-selected Cell 1 within T3, after the re-selection or when T3 expires, continue with step 10a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.

10a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1) on Cell 1.

12. Repeat step 2-11 until the confidence level according to Annex G clause G.2.7 is achieved.

11.1.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.1.4.1.4.3-1: Common Exception messages for NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.3-1 Table H.2.3-2 with Condition higher priority Table H.2.3-3 with Condition higher priority
Default RRC messages and information elements contents exceptions	Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.1.4.1.4.3-2: *SystemInformationBlockType3* for NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA

Derivation Path: TS 36.508 [25] Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
threshServingLow	22	Actual value = 44 dB	
cellReselectionPriority	5		higher priority E-UTRA
}			
}			

Table 11.1.4.1.4.3-3: *SystemInformationBlockType24* for NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA

Derivation Path: TS 36.508 [25] Table 4.4.3.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			

carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
cellReselectionPriority-r15[*n*]	4		higher priority E-UTRA
threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
}			
}			

11.1.4.1.5 Test requirement

Tables 11.1.4.1.5-1 and 11.1.4.1.5-2 define the primary level settings including test tolerances for higher priority E-UTRA cell re-selection test case.

Table 11.1.4.1.5-1: NR Cell 1 specific parameters for NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
TDD configuration		1, 2	TDDConf.1.1.CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2	0.9		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2	0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2	0.5		
UL CCA probability P_{CCA_UL}		1, 2	1		
$M_{d,max}$		1, 2	16		
$M_{m,max}$		1, 2	4		
$M_{e,max}$		1, 2	8		
PDSCH parameters		1, 2	SR.1.1 CCA		
RMSI CORESET parameters		1, 2	CR.1.1 CCA		
Dedicated CORESET parameters		1, 2	CCR.1.1 CCA		
SSB parameters		1, 2	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access		
NR SMTC parameters		1, 2	SMTC.1		
OCNG Pattern		1, 2	OP.1		
Initial DL BWP configuration		1, 2	DLBWP.0		
Initial UL BWP configuration		1, 2	ULBWP.0		
RLM-RS		1, 2	SSB		
Qrxlevmin	dBm/SCS	1, 2	-137		
N_{oc}	dBm/SCS	1, 2	-95		
N_{oc}	dBm/15 kHz	1, 2	-98		
SS-RSRP		1, 2	-80.99	-80.99	-80.99
$\hat{E}_s / I_{ot}$	dB	1, 2	14	15.6	15.6
$\hat{E}_s / N_{oc}$	dB	1, 2	14	15.6	15.6
Io	dBm/38.16 MHz	1, 2	-49.78	-48.23	-48.23
Treselection	S	1, 2	0		
Snonintrasearch	dB	1, 2	50		
$Thresh_{x, high (Note 2)}$	dB	1, 2	48		
$Thresh_{serving, low}$	dB	1, 2	44		
$Thresh_{x, low}$	dB	1, 2	50		
Propagation Condition		1, 2	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell
Note 3: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.1.4.1.5-2: E-UTRA Cell 2 specific parameters for NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc}	dBm/15 kHz	-98	-98	-100
RSRP	dBm/15 KHz	-infinity	-84.4	-103.6
$\hat{E}_s / I_{ot}$	dB	-infinity	13.6	-3.6
$\hat{E}_s / N_{oc}$	dB	-infinity	13.6	-3.6
$Treselection_{EUTRAN}$	s	0		
Snonintrasearch	dB	50		
$Thresh_{x, high (Note 2)}$	dB	48		
$Thresh_{serving, low}$	dB	44		
$Thresh_{x, low}$	dB	50		
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate, E-UTRAN} + T_{SI-E-UTRA}$,

Where:

- $T_{higher_priority_search}$ See clause 4.2.2.7 of TS 38.133 [6]
- $T_{evaluate, E-UTRAN}$ See Table 6.1.2.0.1-1 in TS 38.133 [6] clause 6.1.2.0.1
- $T_{SI-E-UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority E-UTRAN cell.

11.1.4.2 NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA

11.1.4.2.1 Test purpose

This test is to verify the requirement for the NR cell subject to CCA to E-UTRAN inter-RAT cell reselection requirements specified in clause 11.1.4.0.1 when the E-UTRAN cell is of lower priority.

11.1.4.2.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, SSB-based RRM, and UL with a shared spectrum NR carrier.

11.1.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.1.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.1.4.2.

11.1.4.2.4 Test description

11.1.4.2.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 11.1.4.2.4.1-1.

Table 11.1.4.2.4.1-1: Supported test configurations for NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA

Configuration	Description of a cell with CCA	Description of a cell without CCA
11.1.4.2-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
11.1.4.2-2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test requirement and the DUT according to the parameters in Table 11.1.4.2.4.1-2.

Table 11.1.4.2.4.1-2: Initial conditions for NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.1.4.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	Without LTE part. For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.1.4.2.4.1-3.

2. Message contents are defined in clause 11.1.4.2.4.3.

3. The test scenario comprises of one NR cell which is subject to CCA and one E-UTRAN cell. Cell 1 is the NR PCell under CCA and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.2 and C.1.3, Cell 2 is configured according to Annex A.6B.1.

Table 11.1.4.2.4.1-3: General test parameters for NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase.
T1 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cells		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cells		1, 2	Cell2	
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DBT Window Configuration			1, 2	DBT.1	As specified in clause A.12.1.
DL CCA model			1, 2	As specified in clause D.7.2.1	
UL CCA model			1, 2	As specified in clause D.7.2.2	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
E-UTRAN PRACH configuration index			1	53	As specified in table 5.7.1-2 in TS 36.211 [24]
			2	4	
T1		s	1, 2	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

11.1.4.2.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) under CCA and an E-UTRA neighbour cell (Cell 2). The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1. The CCA model (both DL and UL) on Cell 1 is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

1a. Set the parameters according to T2 in Table 11.1.4.2.5-1 and 11.1.4.2.5-2. SS waits at least for 32sec ($T_{detect,EUTRAN}$) to ensure the UE can detect E-UTRA neighbor cell (Cell2).

2. Set the parameters according to T1 in Table 11.1.4.2.5-1 and 11.1.4.2.5-2. The SS shall enable DL and UL CCA model on Cell 1 according to Table 11.1.4.2.5-1. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.

4. If the UE responds on Cell 2 during time duration T1 within 8 seconds from the beginning of time period T1 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

5. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 5a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 9.

5a The SS shall send an *RRCConnectionRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 11.1.4.2.5-1 and 11.1.4.2.5-2. T2 starts.

7. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 1.

8. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 8a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch on and off the UE and skip to step 9.

8a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

9. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1) on Cell 1.

9a. Set the parameters according to T2 in Table 11.1.4.2.5-1 and 11.1.4.2.5-2. SS waits at least for 32sec ($T_{detect,EUTRAN}$) to ensure the UE can detect E-UTRA neighbor cell(Cell2).

10. Repeat step 2-9a until the confidence level according to Annex G clause G.2.7 is achieved.

11.1.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.1.4.1.4.3-1: Common Exception messages for NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.3-1 Table H.2.3-3 with Condition lower priority
Default RRC messages and information elements contents exceptions	Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.1.4.1.4.3-2: *SystemInformationBlockType3* for NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA

Derivation Path: TS 36.508 [25] Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
threshServingLow	22	Actual value = 44 dB	
cellReselectionPriority	4		lower priority E-UTRA
}			
}			

Table 11.1.4.1.4.3-3: *SystemInformationBlockType24* for NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA

Derivation Path: TS 36.508 [25] Table 4.4.3.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
cellReselectionPriority-r15[*n*]	5		lower priority E-UTRA
threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
}			
}			

11.1.4.2.5 Test requirement

Tables 11.1.4.2.5-1 and 11.1.4.2.5-2 define the primary level settings including test tolerances for higher priority E-UTRA cell re-selection test case.

Table 11.1.4.2.5-1: NR Cell 1 specific parameters for NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA

Parameter	**Unit**	**Test configuration**	**Cell 1**	
			T1	**T2**
TDD configuration		1, 2	TDDConf.1.1.CCA	
DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2	0.9	
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2	0.75	
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2	0.5	
UL CCA probability P_{CCA_UL}		1, 2	1	
$M_{d,max}$		1, 2	16	
$M_{m,max}$		1, 2	4	
$M_{e,max}$		1, 2	8	
PDSCH RMC configuration		1, 2	SR.1.1 CCA	
RMSI CORESET RMC Configuration		1, 2	CR.1.1 CCA	
Dedicated CORESET RMC Configuration		1, 2	CCR.1.1 CCA	
SSB configuration		1, 2	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access	
SMTC configuration		1, 2	SMTC.1	
OCNG Pattern		1, 2	OP.1	
Initial DL BWP configuration		1, 2	DLBWP.0	
Initial UL BWP configuration		1, 2	ULBWP.0	
RLM-RS		1, 2	SSB	
Qrxlevmin	dBm/SCS	1, 2	-137	
N_{oc}	dBm/SCS	1, 2	-97	-95
N_{oc}	dBm/15 kHz	1, 2	-100	-98
SS-RSRP	dBm/SCS	1, 2	-100.59	-81.39
$\hat{E}_s / I_{ot}$	dB	1, 2	-3.6	13.6

$\hat{E}_s/N_{oc}$	dB	1, 2	-3.6	13.6
Io	dBm/38.16 MHz	1, 2	-64.37	-50.16
Treselection	S	1, 2	0	
Snonintrasearch	dB	1, 2	50	
$Thresh_{x, high (Note 2)}$	dB	1, 2	48	
$Thresh_{serving, low}$	dB	1, 2	44	
$Thresh_{x, low}$	dB	1, 2	50	
Propagation Condition		1, 2	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell Note 3: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.				

Table 11.1.4.2.5-2: E-UTRA Cell 2 specific parameters for NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA[Note 1]	dB		
OCNG_RB[Note 1]	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-82.4	-84
$\hat{E}_s/I_{ot}$	dB	15.6	14
$\hat{E}_s/N_{oc}$	dB	15.6	14
$Treselection_{EUTRAN}$	S	0	
Snonintrasearch	dB	50	
$Thresh_{x, high (Note 2)}$	dB	48	
$Thresh_{serving, low}$	dB	44	
$Thresh_{x, low}$	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell			

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate,\ E\text{-}UTRAN} + T_{SI\text{-}E\text{-}UTRA}$,

Where:

- $T_{evaluate,\ E\text{-}UTRAN}$ See Table 6.1.2.0.1-1 in 38.133[6] clause 6.1.2.0.1
- $T_{SI\text{-}E\text{-}UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s for the cell re-selection delay to a lower priority E-UTRAN cell.

11.2 RRC_CONNECTED state mobility

11.2.1 Handover

11.2.1.0 Minimum conformance requirements

11.2.1.0.1 Minimum conformance requirements for NR FR1 - NR FR1 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR1 cell to NR FR1 cell in carrier frequencies with CCA, and to both intra-frequency and inter-frequency handovers from NR FR1 cell in carrier frequencies with CCA to NR FR1 cell in carrier frequencies with CCA.

When the UE receives an RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ ms from the end of the last TTI containing the RRC command.

Where:

$D_{handover}$ equals the applicable RRC procedure delay to be defined in clause12 in TS 38.331 [13] plus the interruption time.

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}\ \text{ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot ≥-2 dB, then $T_{search} = (1+L_1) * T_{rs}$. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot ≥-2 dB, then $T_{search} = (3+L_1') * T_{rs}$ where L_1 and L_1' are the number of SMTC occasions not available at the UE during the intra-frequency and inter-frequency detection period, respectively. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = (1+ L_2) * T_{rs}$ ms, where L_2 is the number of SMTC occasions not available at the UE during the time tracking period.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. T_{IU} can be up to: $(1+ L_3)*T_{SSB,RO}$ + 10 ms where $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [8] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [37]. When the UE is configured with both the UL BWP with PRACH occasion on the target cell and UL CCA failure detection/recovery, the interruption can be longer.

T_{rs} is the SMTC periodicity of the target NR cell in a carrier frequency with CCA if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

NOTE 1: The interruption time considering the potential extensions caused by L_1, L_1´,L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [13].

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in TS 38.133 [6] Clause 9.2A.5 for intra-frequency handover and Clause 9.3A.4 for inter-frequency handover to a carrier frequency with CCA.

The normative reference for this requirement is TS 38.133 [6] clause 6.1B.1.2.

11.2.1.1 NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell

11.2.1.1.1 Test purpose

To verify the NR intra frequency handover requirements from FR1 carrier under CCA to FR1 carrier under CCA specified in clause 11.2.1.0.1 in RRC_CONNECTED state by meeting the delay requirement and interruption length for handover to a known target cell.

11.2.1.1.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.1.1.

11.2.1.1.4 Test description

11.2.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 11.2.1.1.4.1-1.

Table 11.2.1.1.4.1-1: Supported test configurations for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell

Config	Description
11.2.1.1-1	With CCA: Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.2.1.1.4.1-2

Table 11.2.1.1.4.1-2: Initial conditions for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. Message contents are defined in clause 11.2.1.1.4.3.
2. The test scenario comprises of 1 NR carrier and 2 cells that are subject to CCA. The power levels and settings for source NR cell and target FR1 NR cell are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 11.2.1.1.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 11.2.1.1.4.1-3: General test parameters for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier under CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause D.7.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause D.7.2.2	
	Semi-static channel access Note 2,3			
A3-Offset		dB	-1	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T304		ms	500	
L_{CCA_DL}			5	
W_{CCA_DL}		ms	T304	
L_{CCA_UL}			5	
W_{CCA_UL}		ms	T304	
T1		s	5	
T2		s	≤ 5	
T3		s	≥ $T_{interrupt}$	$T_{interrupt}$ is defined in clause 11.2.1.0.1

NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

11.2.1.1.4.2 Test procedure

Two cells are deployed in the test, FR1 NR Cell 1 and FR1 NR Cell 2 on the same frequency both of which are subject to CCA as given in tables 11.2.1.1.4.1-3 and 11.2.1.1.5-1. No gap patterns are configured in the test case. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

The SS shall send a RRC message implying handover to cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 11.2.1.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. The SS shall enable DL and UL CCA model according to Table 11.1.1.1.5-1. T1 starts.
3. SS shall transmit an *RRCReconfiguration* message, configuring measurement object.
4. UE shall transmit *RRCReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.2.1.1.5-1.
6. UE shall transmit a *MeasurementReport* message triggered by Event A3.
7. SS shall transmit the *RRCReconfiguration* message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 11.2.1.1.5-1. T3 starts.
8. If the UE transmits the uplink PRACH channel to Cell 2 within [222 ms] from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
9. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.
10. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).
11. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop.
12. Repeat steps 2-11 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.2.1.1.4.3-1: Common Exception messages for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, and Synchronous cells Table H.3.1-4 with A3-offset = -1dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.2-2 with Condition RBConfig_KeyChange Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

11.2.1.1.5 Test requirements

Table 11.2.1.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell test.

Table 11.2.1.1.5-1: Cell specific test parameters for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
P_{CCA_DL} for dynamic channel access Note 4,6		-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		
P_{CCA_DL} for semi-static channel access Note 5,6		-	P_{CCA_DL}=0.9375			P_{CCA_DL}=0.9375		
P_{CCA_UL} for dynamic channel access Note 4,6		-	0.75			0.75		
P_{CCA_UL} for semi-static channel access Note 5,6		-	0.87			0.87		
TDD configuration	Config 1		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1		40: $N_{RB,c}$ = 106					
BWP BW	Config 1		40: $N_{RB,c}$ = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference	Config 1		SR.1.1 CCA					
CORESET Reference Channel	Config 1		CR.1.1 CCA					
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA					
TRS configuration	Config 1		TRS.1.1 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
DBT window configuration	Config 1		DBT.1					
SSB configuration for semi-static channel access Note 4, 6	Config 1		SSB.1 CCA					
SSB configuration for dynamic channel access Note 5, 6	Config 1		SSB.2 CCA					
ssb-PositionQCL	Config 1		[1]					
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	30 kHz					
PRACH configuration			FR1 PRACH configuration 1 under CCA					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					

EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)		dB	0					
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1	dBm/SCS	-95					
$\hat{E}_s / I_{ot}$		dB	8	-2.41	-2.41	- Infinity	1.36	1.36
$\hat{E}_s / N_{oc}$		dB	8	8	8	- Infinity	10	10
SSB_RP	Config 1	dBm/SCS	-87	-87	-87	- Infinity	-85	-85
Io Note3	Config 1	dBm/ 38.16MHz	-55.31	-51.56	-51.56	-55.31	-51.56	-51.56
Propagation condition		-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{interrupt}$ from the beginning of time period T3, where $T_{interrupt}$ is defined in clause 11.2.1.0.1.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

$T_{search} = 0$.

$T_{processing} = 20$ ms.

$T_{margin} = 2$ ms.

$T_{\Delta} = (1+ L_2) *20$ ms.

$T_{IU} = (1+ L_3)*10 + 10$ ms

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [13], L_2 is the number of SMTC occasions not available at the UE during the time tracking period where $L_2 \leq L_{CCA_DL}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{CCA_UL}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [37]. The interruption time considering the potential extensions caused by L_1, L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [13]. Test equipment should make sure that L_{CCA_DL} and L_{CCA_UL} are not exceeded during a test by monitoring the number of CCA failures and preventing additional CCA failures from happening after L_{CCA_DL} or L_{CCA_UL} is reached.

11.2.1.2 NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

11.2.1.2.1 Test purpose

To verify the NR intra frequency handover requirements from FR1 carrier under CCA to FR1 carrier under CCA specified in clause 11.2.1.0.1 in RRC_CONNECTED state by meeting the delay requirement and interruption length for handover to an unknown target cell.

11.2.1.2.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.1.2.

11.2.1.2.4 Test description

11.2.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 11.2.1.2.4.1-1.

Table 11.2.1.2.4.1-1: Supported test configurations for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

Config	Description
11.2.1.2-1	With CCA: Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.2.1.2.4.1-2

Table 11.2.1.2.4.1-2: Initial conditions for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. Message contents are defined in clause 11.2.1.2.4.3.
2. The test scenario comprises of 1 NR carrier and 2 cells that are subject to CCA. The power levels and settings for source NR cell and target FR1 NR cell are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 11.2.1.2.4.1-3 below.

Table 11.2.1.2.4.1-3: General test parameters for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier under CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause D.7.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause D.7.2.2	
	Semi-static channel access Note 2,3			
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 µs	Synchronous cells
T304		ms	500	
L_{CCA_DL}			5	
W_{CCA_DL}		ms	T304	
L_{CCA_UL}			5	
W_{CCA_UL}		ms	T304	
T1		s	5	
T2		s	≥ $T_{interrupt}$	$T_{interrupt}$ is defined in clause 11.2.1.0.1

NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

11.2.1.2.4.2 Test procedure

Two cells are deployed in the test, FR1 NR Cell 1 and FR1 NR Cell 2 on the same frequency both of which are subject to CCA as given in tables 11.2.1.2.4.1-3 and 11.2.1.2.5-1. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE is expected to detect and start to transmit the PRACH to Cell 2 after it receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.2.1.2.5-1. Propagation conditions are set according to Annex C clause C.2.2. The SS shall enable DL and UL CCA model according to Table 11.2.1.2.5-1. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message implying handover to Cell 2.

4. The start of T2 is the instant when the last TTI containing the RRC reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 11.2.1.2.5-1. T2 starts.

5. If the UE transmits the uplink PRACH channel to Cell 2 less than [242 ms] from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

6. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.

7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Repeat step 2-8 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.2.1.2.4.3-1: Common Exception messages for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.2-2 with Condition RBConfig_KeyChange Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

11.2.1.2.5 Test requirements

Table 11.2.1.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell test.

Table 11.2.1.2.5-1: Cell specific test parameters for NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
P_{CCA_DL} for dynamic channel access Note 4,6		-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 5,6		-	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 4,6		-	0.75		0.75	
P_{CCA_UL} for semi-static channel access Note 5,6		-	0.87		0.87	
TDD configuration	Config 1		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1		40: $N_{RB,c}$ = 106			
BWP BW	Config 1		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference	Config 1		SR.1.1 CCA			
CORESET Reference Channel	Config 1		CR.1.1 CCA			
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA			
TRS configuration	Config 1		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
DBT window configuration	Config 1		DBT.1			
SSB configuration for semi-static channel access Note 4, 6	Config 1		SSB.1 CCA			
SSB configuration for dynamic channel access Note 5, 6	Config 1		SSB.2 CCA			
ssb-PositionQCL	Config 1		[1]			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	30 kHz			

PRACH configuration			FR1 PRACH configuration 1 under CCA			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1	dBm/SCS	-95			
$\hat{E}_s/I_{ot}$		dB	8	-0.64	-Infinity	-0.64
$\hat{E}_s/N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1	dBm/SCS	-87	-87	-Infinity	-87
Io Note3	Config 1	dBm/ 38.16MHz	-55.31	-52.60	-55.31	-52.60
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{interrupt}$ from the beginning of time period T3, where $T_{interrupt}$ is defined in clause 11.2.1.0.1.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

$T_{search} = (1+L_1)* 20$ ms.

$T_{processing} = 20$ ms.

$T_{margin} = 2$ ms.

$T_{\Delta} = (1+ L_2) *20$ ms.

$T_{IU} = (1+ L_3)*10 + 10$ ms

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [13], L_1 is the number of SMTC occasions not available at the UE during the intra-frequency detection period, L_2 is the number of SMTC occasions not available at the UE during the time tracking period, where $L_1 + L_2 \leq L_{CCA_DL}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{CCA_UL}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [37]. The

interruption time considering the potential extensions caused by L_1, L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer.

11.2.1.3 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

11.2.1.3.1 Test purpose

To verify the inter frequency handover requirements from FR1 carrier under CCA to FR1 carrier under CCA specified in clause 11.2.1.0.1 in RRC_CONNECTED state by meeting the delay requirement and interruption length for handover to an unknown target cell.

11.2.1.3.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.1.3.

11.2.1.3.4 Test description

11.2.1.3.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 11.2.1.3.4.1-1.

Table 11.2.1.3.4.1-1: Supported test configurations for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

Config	Description
11.2.1.3-1	With CCA: Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.2.1.3.4.1-2

Table 11.2.1.3.4.1-2: Initial conditions for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. Message contents are defined in clause 11.2.1.3.4.3.
2. The power levels and settings for source NR cell 1 and target FR1 NR cell 2 are set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Table 11.2.1.3.4.1-3 below.

Table 11.2.1.3.4.1-3: General test parameters for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier under CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause D.7.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause D.7.2.2	
	Semi-static channel access Note 2,3			
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T304		ms	500	
L_{CCA_DL}			5	
W_{CCA_DL}		ms	T304	
L_{CCA_UL}			5	
W_{CCA_UL}		ms	T304	
T1		s	5	
T2		s	$\leq T_{interrupt}$	$T_{interrupt}$ is defined in clause 11.2.1.0.1
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

11.2.1.3.4.2 Test procedure

The test scenario comprises of two NR carriers and one cell on each carrier both of which are subject to CCA as given in tables 11.2.1.3.4.1-3 and 11.2.1.3.5-1. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.2.1.3.5-1. Propagation conditions are set according to Annex C clause C.2.2. The SS shall enable DL and UL CCA model according to Table 11.2.1.3.5-1. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message implying handover to Cell 2.

4. The start of T2 is the instant when the last TTI containing the RRC reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 11.2.1.3.5-1. T2 starts.

5. If the UE transmits the uplink PRACH channel to Cell 2 less than [282 ms] from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

6. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.

7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*,

Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Repeat step 2-8 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.2.1.3.4.3-1: Common Exception messages for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.2-2 with Condition RBConfig_KeyChange Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

11.2.1.3.5 Test requirements

Table 11.2.1.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell test.

Table 11.2.1.3.5-1: Cell specific test parameters for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
P_{CCA_DL} for dynamic channel access Note 4,6		-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 5,6		-	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 4,6		-	0.75		0.75	
P_{CCA_UL} for semi-static channel access Note 5,6		-	0.87		0.87	
TDD configuration	Config 1		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1		40: $N_{RB,c}$ = 106			
BWP BW	Config 1		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference	Config 1		SR.1.1 CCA			
CORESET Reference Channel	Config 1		CR1.1 CCA			
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA			
TRS configuration	Config 1		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
DBT window configuration	Config 1		DBT.1			
SSB configuration for semi-static channel access Note 4, 6	Config 1		SSB.1 CCA			
SSB configuration for dynamic channel access Note 5, 6	Config 1		SSB.2 CCA			
ssb-PositionQCL	Config 1		[1]			

PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	30 kHz			
PRACH configuration			FR1 PRACH configuration 1 under CCA			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1	dBm/SCS	-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s/N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1	dBm/SCS	-91	-91	-Infinity	-90
Io Note3	Config 1	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-57.75
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{interrupt}$ from the beginning of time period T3, where $T_{interrupt}$ is defined in clause 11.2.1.0.1.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$

$T_{search} = (3+L_1')* 20$ ms.

$T_{processing} = 20$ ms.

$T_{margin} = 2$ ms.

$T_{\Delta} = (1+ L_2) *20$ ms.

$T_{IU} = (1+ L_3)*10 + 10$ ms

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [13], L_1' is the number of SMTC occasions not available at the UE during the inter-frequency detection period, L_2 is the number of SMTC occasions not available at the UE during the time tracking period, where $L_1' + L_2 \leq L_{CCA_DL}$, and L_3 is the number of consecutive SSB to PRACH

occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{CCA_UL}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [37]. The interruption time considering the potential extensions caused by , L_1´,L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer.

11.2.1.4 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell

11.2.1.4.1 Test purpose

To verify the NR with CCA FR1-NR FR1 handover requirements specified in clause 6.3.1.0.2 in RRC_CONNECTED state by meeting the delay requirement and interruption length for handover to a known target cell.

11.2.1.4.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.1.4.

11.2.1.4.4 Test description

11.2.1.4.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 11.2.1.4.4.1-1.

Table 11.2.1.4.4.1-1: Supported test configurations for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell

Config	Description
11.2.1.4-1	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
11.2.1.4-2	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
11.2.1.4-3	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.2.1.4.4.1-2

Table 11.2.1.4.4.1-2: Initial conditions for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.1.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. Message contents are defined in clause 11.2.1.4.4.3.

2. The test scenario comprises of 2 cells on 2 different NR carriers where the first carrier is subject to CCA. The power levels and settings for source NR cell under CCA and target FR1 NR cell are set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Table 11.2.1.4.4.1-3 below, with A3-Offset modified by Test Tolerance.

Table 11.2.1.4.4.1-3: General test parameters for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	NR cell with CCA
	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause D.7.2.1	
UL CCA model			As specified in clause D.7.2.2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

11.2.1.4.4.2 Test procedure

Two cells are deployed in the test, FR1 NR Cell 1 under CCA and FR1 NR Cell 2 on a different frequency than Cell 1 as given in tables 11.2.1.4.4.1-3 and 11.2.1.4.5-1. No gap patterns are configured in the test case. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR Cell 1 with CCA shall send a RRC message implying handover to Cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.2.1.4.5-1. Propagation conditions are set according to Annex C clause C.2.2. The SS shall enable DL and UL CCA model according to Table 11.1.1.4.5-1. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message, configuring measurement object.

4. UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.2.1.4.5-1.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3.

7. SS shall transmit the *RRCReconfiguration* message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 11.2.1.4.5-1. T3 starts.

8. If the UE transmits the uplink PRACH channel to Cell 2 within 112 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

9. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.

10. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

11. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop.

12. Repeat steps 2-11 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.2.1.4.4.3-1: Common Exception messages for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ and no GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1, SMTC pattern 1 and Synchronous cells for Config 1 and 2 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.2 FR1, SMTC pattern 1 and Synchronous cells for Config 3 Table H.3.1-4 with A3-offset = -1dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.2-2 with Condition RBConfig_KeyChange Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

11.2.1.4.5 Test requirements

Table 11.2.1.4.5-1 defines the primary level settings including test tolerances for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell test.

Table 11.2.1.4.5-1: Cell specific test parameters for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number		1,2,3	1			2		
Duplex mode		1	TDD			FDD		
		2	TDD			TDD		
		3	TDD			TDD		
TDD configuration		1	TDDConf.1.1 CCA			Not Applicable		
		2	TDDConf.1.1 CCA			TDDConf.1.1		
		3	TDDConf.1.1 CCA			TDDConf.2.1		
$BW_{channel}$	MHz	1	40: $N_{RB,c}$ = 106			10: $N_{RB,c}$ = 52		
		2	40: $N_{RB,c}$ = 106			10: $N_{RB,c}$ = 52		
		3	40: $N_{RB,c}$ = 106			40: $N_{RB,c}$ = 106		
BWP BW	MHz	1	40: $N_{RB,c}$ = 106			10: $N_{RB,c}$ = 52		
		2	40: $N_{RB,c}$ = 106			10: $N_{RB,c}$ = 52		
		3	40: $N_{RB,c}$ = 106			40: $N_{RB,c}$ = 106		
DRX Cycle	ms	1,2,3	Not Applicable					

PDSCH Reference measurement channel			1	SR.1.1 CCA			SR.1.1 FDD		
			2	SR.1.1 CCA			SR.1.1 TDD		
			3	SR.1.1 CCA			SR2.1 TDD		
CORESET Reference Channel			1	CR1.1 CCA			CR.1.1 FDD		
			2	CR1.1 CCA			CR.1.1 TDD		
			3	CR1.1 CCA			CR2.1 TDD		
Dedicated CORESET RMC configuration			1	CCR.1.1 CCA			CCR.1.1 FDD		
			2	CCR.1.1 CCA			CCR.1.1 TDD		
			3	CCR.1.1 CCA			CCR.2.1 TDD		
DL CCA probability for semi-static channel access (P_{CCA_DL})DL CCA probability P_{CCA_DL}			1,2,3	0.9375			N/A		
DL CCA probability for dynamic channel access ($P_{CCA_DL_1}$)			1,2,3	0.75			N/A		
DL CCA probability for dynamic channel access ($P_{CCA_DL_2}$)			1,2,3	0.75			N/A		
UL CCA probability for semi-static channel access P_{CCA_UL}			1,2,3	0.75			N/A		
UL CCA probability for dynamic static channel access P_{CCA_UL}			1,2,3	0.87					
TRS configuration			1	TRS.1.2 TDD			TRS.1.1 FDD		
			2	TRS.1.2 TDD			TRS.1.1 TDD		
			3	TRS.1.2 TDD			TRS.1.2 TDD		
OCNG Patterns				OP.1					
SMTC Configuration				SMTC.1					
SSB Configuration	Semi-static channel access		1,2	SSB.1 CCA (As defined in A.3A.1)			SSB.1 FR1		
	Dynamic channel access			SSB.2 CCA (As defined in A.3A.1)					
	Semi-static channel access		3	SSB.1 CCA (As defined in A.3A.1)			SSB.2 FR1		
	Dynamic channel access			SSB.2 CCA (As defined in A.3A.1)					
DBT window configuration				As defined in A.12.1			Not applicable		
PDSCH/PDCCH subcarrier spacing		kHz	1,2	30 kHz			15 kHz		
			3	30 kHz			30 kHz		
PUCCH/PUSCH subcarrier spacing		kHz	1,2	30 kHz			15 kHz		
			3	30 kHz			30 kHz		
PRACH configuration				FR1 PRACH configuration 1 under CCA			FR1 PRACH configuration 1		
BWP configuration	Initial DL BWP		1,2,3	DLBWP.0.1					
	Dedicated DL BWP		1,2,3	DLBWP.1.1					
	Initial UL BWP		1,2,3	ULBWP.0.1					
	Dedicated UL BWP		1,2,3	ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	1,2,3	0					
EPRE ratio of PBCH DMRS to SSS			1,2,3						
EPRE ratio of PBCH to PBCH DMRS			1,2,3						
EPRE ratio of PDCCH DMRS to SSS			1,2,3						
EPRE ratio of PDCCH to PDCCH DMRS			1,2,3						
EPRE ratio of PDSCH DMRS to SSS			1,2,3						
EPRE ratio of PDSCH to PDSCH			1,2,3						
EPRE ratio of OCNG DMRS to SSS[Note1]			1,2,3						
EPRE ratio of OCNG to OCNG DMRS[Note1]			1,2,3						
N_{oc} [Note2]		dBm/SCS	1,2	-95			-98		
			3	-95			-95		
$\hat{E}_s / I_{ot}$		dB	1,2,3	8	8	8	-Infinity	11	11
$\hat{E}_s / N_{oc}$		dB	1,2,3	8	8	8	-Infinity	11	11
SSB_RP		dBm/SCS	1,2,3	-87	-87	-87	-Infinity	-87	-87
Io[Note3]		dBm/Ch BW	1,2	-55.31	-55.31	-55.31	-70.05	-58.72	-58.72

Io[Note3]	dBm/Ch BW	3	-55.31	-55.31	-55.31	-63.94	-52.61	-52.61
Propagation condition	-	1,2,3	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

The UE shall start to transmit the PRACH to Cell 2 less than 112 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [13].

$T_{interrupt}$ = 102 ms in the test. $T_{interrupt}$ is defined in clause 6.3.1.0.2.

This gives a total of 112 ms

11.2.1.5 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell

11.2.1.5.1 Test purpose

To verify the NR with CCA FR1-NR FR1 inter frequency handover handover requirements specified in clause 6.3.1.0.2 in RRC_CONNECTED state by meeting the delay requirement and interruption length for handover to an unknown target cell.

11.2.1.5.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.1.5.

11.2.1.5.4 Test description

11.2.1.5.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 11.2.1.5.4.1-1.

Table 11.2.1.5.4.1-1: Supported test configurations for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell

Config	Description
11.2.1.5-1	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
11.2.1.5-2	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

11.2.1.5-3	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.2.1.5.4.1-2

Table 11.2.1.5.4.1-2: Initial conditions for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.1.5.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. Message contents are defined in clause 11.2.1.5.4.3.
2. The power levels and settings for source NR cell 1 under CCA and target FR1 NR cell 2 are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 11.2.1.5.4.1-3 below.

Table 11.2.1.5.4.1-3: General test parameters for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	NR cell with CCA
	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause D.7.2.1	
UL CCA model			As specified in clause D.7.2.2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	

11.2.1.5.4.2 Test procedure

The test scenario comprises of two carriers and one cell on each carrier. Cell 1 is the NR cell with CCA cell and Cell 2 is an NR neighbour cell. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2.

Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

The CCA model (both DL and UL) for Cell 1 is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.2.1.5.5-1. Propagation conditions are set according to Annex C clause C.2.2. The SS shall enable DL and UL CCA model for Cell 1 according to Table 11.2.1.5.5-1. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message implying handover to Cell 2.

4. The start of T2 is the instant when the last TTI containing the RRC reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 11.2.1.5.5-1. T2 starts.

5. If the UE transmits the uplink PRACH channel to Cell 2 less than 132 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

6. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.

7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model for Cell 1 (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Repeat step 2-8 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.2.1.5.4.3-1: Common Exception messages for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.2-2 with Condition RBConfig_KeyChange Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

11.2.1.5.5 Test requirements

Table 11.2.1.5.5-1 defines the primary level settings including test tolerances for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell test.

Table 11.2.1.5.5-1: Cell specific test parameters for NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell

Parameter	Unit	Configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		1, 2, 3	1		2	
Duplex mode		1	TDD		FDD	
		2	TDD		TDD	
		3	TDD		TDD	
DL CCA model		1, 2, 3	As specified in clause D.7.2.1		N/A	
UL CCA model		1, 2, 3	As specified in clause D.7.2.2			
TDD configuration		1	TDDConf.1.1 CCA		Not Applicable	
		2	TDDConf.1.1 CCA		TDDConf.1.1	
		3	TDDConf.1.1 CCA		TDDConf.2.1	
$BW_{channel}$	MHz	1	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
		2	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	

		3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP BW	MHz	1	40: $N_{RB,c}$ = 106	10: $N_{RB,c}$ = 52
		2	40: $N_{RB,c}$ = 106	10: $N_{RB,c}$ = 52
		3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
DRX Cycle	ms		Not Applicable	
PDSCH Reference measurement channel		1	SR.1.1 CCA	SR.1.1 FDD
		2	SR.1.1 CCA	SR.1.1 TDD
		3	SR.1.1 CCA	SR2.1 TDD
CORESET Reference Channel		1	CR2.1 TDD	CR.1.1 FDD
		2	CR2.1 TDD	CR.1.1 TDD
		3	CR2.1 TDD	CR2.1 TDD
Dedicated CORESET RMC configuration		1	CCR.1.1 CCA	CCR.1.1 FDD
		2	CCR.1.1 CCA	CCR.1.1 TDD
		3	CCR.1.1 CCA	CCR.2.1 TDD
TRS configuration		1	TRS.1.2 TDD	TRS.1.1 FDD
		2	TRS.1.2 TDD	TRS.1.1 TDD
		3	TRS.1.2 TDD	TRS.1.2 TDD
DL CCA probability for semi-static channel access (P_{CCA_DL})DL CCA probability P_{CCA_DL}		1, 2, 3	0.9375	N/A
DL CCA probability for dynamic channel access ($P_{CCA_DL_1}$)		1, 2, 3	0.75	N/A
DL CCA probability for dynamic channel access ($P_{CCA_DL_2}$)		1, 2, 3	0.75	N/A
UL CCA probability for semi-static channel access P_{CCA_UL}		1, 2, 3	0.75	N/A
UL CCA probability for dynamic static channel access P_{CCA_UL}		1, 2, 3	0.87	N/A
OCNG Patterns		1, 2, 3	OP.1	
SMTC Configuration		1, 2, 3	SMTC.1	
DBT window configuration		1, 2, 3	As defined in A.12.1	N/A
SSB configuration	Semi-static channel access	1,2	SSB.1 CCA (As defined in A.3A.1)	SSB.1 FR1
	Dynamic channel access		SSB.2 CCA (As defined in A.3A.1)	
	Semi-static channel access	3	SSB.1 CCA (As defined in A.3A.1)	SSB.2 FR1
	Dynamic channel access		SSB.2 CCA (As defined in A.3A.1)	
ssb-PositionQCL			[1]	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1	30 kHz	15 kHz
		2	30 kHz	15 kHz
		3	30 kHz	30 kHz
PUCCH/PUSCH subcarrier spacing	kHz	1	30 kHz	15 kHz
		2	30 kHz	15 kHz
		3	30 kHz	30 kHz
PRACH configuration		1,2,3	FR1 PRACH configuration 1 under CCA	FR1 PRACH configuration 1
BWP configuration	Initial DL BWP	1,2,3	DLBWP.0.1	
	Dedicated DL BWP	1,2,3	DLBWP.1.1	
	Initial UL BWP	1,2,3	ULBWP.0.1	
	Dedicated UL BWP	1,2,3	ULBWP.1.1	
EPRE ratio of PSS to SSS	dB	1,2,3	0	
EPRE ratio of PBCH DMRS to SSS		1,2,3		
EPRE ratio of PBCH to PBCH DMRS		1,2,3		

EPRE ratio of PDCCH DMRS to SSS		1,2,3				
EPRE ratio of PDCCH to PDCCH DMRS		1,2,3				
EPRE ratio of PDSCH DMRS to SSS		1,2,3				
EPRE ratio of PDSCH to PDSCH		1,2,3				
EPRE ratio of OCNG DMRS to SSS Note1		1,2,3				
EPRE ratio of OCNG to OCNG DMRS Note1		1,2,3				
N_{oc} Note2	dBm/SCS	1,2,3	-95		-98	
			-95		-95	
$\hat{E}_s / I_{ot}$	dB	1,2,3	4	4	-Infinity	5
$\hat{E}_s / N_{oc}$	dB	1,2,3	4	4	-Infinity	5
SSB_RP	dBm/SCS	1,2,3	-91	-91	-Infinity	-93
			-91	-91	-Infinity	-90
Io Note3	dBm/Ch BW	1,2,3	-58.49	-58.49	-70.05	-63.85
	dBm/Ch BW	1,2,3	-58.49	-58.49	-63.94	-57.75
Propagation condition	-	1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

The UE shall start to transmit the PRACH to Cell 2 less than 132 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [13].

$T_{interrupt}$ = 122 ms in the test. $T_{interrupt}$ is defined in clause 6.3.1.0.2.

This gives a total of 132 ms.

11.2.1.6 NR SA FR1 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell

11.2.1.6.1 Test purpose

To verify the inter frequency handover requirements from FR1 to FR1 carrier under CCA specified in clause 11.2.1.0.1 in RRC_CONNECTED state by meeting the delay requirement and interruption length for handover to an unknown target cell.

11.2.1.6.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.1.6.

11.2.1.6.4 Test description

11.2.1.6.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 11.2.1.6.4.1-1.

Table 11.2.1.6.4.1-1: Supported test configurations for NR SA FR1 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell

Configuration	Description of a cell with CCA	Description of a cell without CCA
11.2.1.6-1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
11.2.1.6-2	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
11.2.1.6-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations		

Configure the test equipment and the DUT according to the parameters in Table 11.2.1.6.4.1-2

Table 11.2.1.6.4.1-2: Initial conditions for NR SA FR1 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.1.6.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. Message contents are defined in clause 11.2.1.6.4.3.
2. The test scenario comprises of 1 NR carrier and 2 cells that are subject to CCA. The power levels and settings for source NR cell and target FR1 NR cell are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 11.2.1.6.4.1-3 below.

Table 11.2.1.6.4.1-3: General test parameters for NR SA FR1 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
DL CCA model			As specified in clause D.7.2.1	
UL CCA model			As specified in clause D.7.2.2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	$\leq T_{interrupt}$	$T_{interrupt}$ is defined in clause 11.2.1.0.1

11.2.1.6.4.2 Test procedure

The test scenario comprises of two carriers and one cell on each carrier. FR1 NR Cell 1 and FR1 NR Cell 2 which is subject to CCA as given in tables 11.2.1.6.4.1-3 and 11.2.1.6.5-1. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.2.1.6.5-1. Propagation conditions are set according to Annex C clause C.2.2. The SS shall enable DL and UL CCA model according to Table 11.2.1.6.5-1. T1 starts.

3. SS shall transmit an RRCReconfiguration message implying handover to Cell 2.

4. The start of T2 is the instant when the last TTI containing the RRC reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 11.2.1.6.5-1. T2 starts.

5. If the UE transmits the uplink PRACH channel to Cell 2 less than [282 ms] from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

6. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.

7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Repeat step 2-8 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.2.1.6.4.3-1: Common Exception messages for NR SA FR1 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.2-2 with Condition RBConfig_KeyChange Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

11.2.1.6.5 Test requirements

Table 11.2.1.6.5-1 defines the primary level settings including test tolerances for NR SA FR1 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell test.

Table 11.2.1.6.5-1: Cell specific test parameters for NR SA FR1 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell

Parameter		Unit	Configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			1, 2, 3	1		2	
DL CCA probability for semi-static channel access (P_{CCA_DL})DL CCA probability P_{CCA_DL}			1, 2, 3	N/A		0.9375	
DL CCA probability for dynamic channel access ($P_{CCA_DL_1}$)			1, 2, 3	N/A		0.75	
DL CCA probability for dynamic channel access ($P_{CCA_DL_2}$)			1, 2, 3	N/A		0.75	
UL CCA probability for semi-static channel access P_{CCA_UL}			1, 2, 3	N/A		0.75	
UL CCA probability for dynamic static channel access P_{CCA_UL}			1, 2, 3	N/A		0.87	
TDD configuration			1	N/A		TDDConf.1.1.CCA	
			2	TDDConf.1.1		TDDConf.1.1.CCA	
			3	TDDConf.1.2		TDDConf.1.1.CCA	
$BW_{channel}$			1	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
			2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
			3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW			1	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
			2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
			3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
DRX Cycle		ms		Not Applicable			
PDSCH Reference			1	SR.1.1 FDD		SR.1.1 CCA	
			2	SR.1.1 TDD		SR.1.1 CCA	
			3	SR.2.1 TDD		SR.1.1 CCA	
CORESET Reference Channel			1	CR.1.1 FDD		CR.1.1 CCA	
			2	CR.1.1 TDD		CR.1.1 CCA	
			3	CR.2.1 TDD		CR.1.1 CCA	
Dedicated CORESET RMC configuration			1	CCR.1.1 FDD		CCR.1.1 CCA	
			2	CCR.1.1 TDD		CCR.1.1 CCA	
			3	CCR.2.1 TDD		CCR.1.1 CCA	
TRS configuration			1	TRS.1.1 FDD		TRS.1.2 TDD	
			2	TRS.1.1 TDD		TRS.1.2 TDD	
			3	TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			1, 2, 3	OP.1			
SMTC Configuration			1, 2, 3	SMTC.1			
DBT window configuration			1, 2, 3	N/A		As defined in A.12.1	
SSB configuration			1, 2	SSB.1 FR1		SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access;	
			3	SSB.2 FR1		SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access;	
ssb-PositionQCL				N/A		[1]	
PDSCH/PDCCH subcarrier spacing		kHz	1	15 kHz		30 kHz	
			2	15 kHz		30 kHz	
			3	30 kHz		30 kHz	
PUCCH/PUSCH subcarrier spacing		kHz	1	15 kHz		30 kHz	
			2	15 kHz		30 kHz	
			3	30 kHz		30 kHz	
PRACH configuration				FR1 PRACH configuration 1		FR1 PRACH configuration 1 CCA	
BWP configuration	Initial DL BWP		1, 2, 3	DLBWP.0.1			
	Dedicated DL BWP		1, 2, 3	DLBWP.1.1			
	Initial UL BWP		1, 2, 3	ULBWP.0.1			

	Dedicated UL BWP		1, 2, 3	ULBWP.1.1			
EPRE ratio of PSS to SSS		dB		0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz		98			
N_{oc} Note2	Config 1	dBm/SCS	1, 2	-98		-95	
			3	-95			
$\hat{E}_s/I_{ot}$		dB		4	4	-Infinity	5
$\hat{E}_s/N_{oc}$		dB		4	4	-Infinity	5
SSB_RP	Config 1	dBm/SCS	1, 2	-94	-94	-Infinity	-90
			3	-91	-91	-Infinity	-90
Io Note3	Config 1	dBm/Ch BW	1, 2	-64.59	-64.59	-63.94	-57.75
		dBm/Ch BW	3	-58.49	-58.49	-63.94	-57.75
Propagation condition		-		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{interrupt}$ from the beginning of time period T3, where $T_{interrupt}$ is defined in clause 11.2.1.0.1.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [13], L_1' is the number of SMTC occasions not available at the UE during the inter-frequency detection period, L_2 is the number of SMTC occasions not available at the UE during the time tracking period, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. L_3 = 0 for Type 2C UL channel access procedure as defined in TS 37.213 [37]. The interruption time considering the potential extensions caused by L_1, L_1´,L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [13].

11.2.1.7 NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell

11.2.1.7.1 Test purpose

The purpose of this test is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1 carrier under CCA. This test shall verify the NR to E-UTRAN handover requirements as specified in clause 6.3.1.0.1.

11.2.1.7.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.1.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.1.7.

11.2.1.7.4 Test description

11.2.1.7.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 11.2.1.7.4.1-1.

Table 11.2.1.7.4.1-1: Supported test configurations for NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell

Configuration	Description of a cell with CCA	Description of a cell without CCA
11.2.1.7-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
11.2.1.7-2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE supporting SA operation only on NR band(s) with shared spectrum access is required to be tested.		

Configure the test requirement and the DUT according to the parameters in Table 11.2.1.7.4.1-2.

Table 11.2.1.7.4.1-2: Initial conditions for NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.1.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.2.1.7.4.1-3.

2. Message contents are defined in clause 11.2.1.7.4.3.

3. The test comprises of one NR carrier under CCA and one E-UTRA carrier with one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. Cell 1 is configured according to Annex C.1.2 and C.1.3, Cell 2 is configured according to Annex A.6B.1.

Table 11.2.1.7.4.1-3: General test parameters for NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell on a carrier under CCA

	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause D.7.2.1	
UL CCA model			As specified in clause D.7.2.2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	As specified in Table 11.2.1.7.5-1	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN		dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in TS 38.133 [6] Table 9.1.2-1 started before T2 starts
T1		s	5	
T2		s	≤5	
T3		s	1	

11.2.1.7.4.2 Test procedure

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in TS 38.133 [6] Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the next instant after the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.2.1.7.5-1 and 11.2.1.7.5-2. Propagation conditions are set according to Annex C clause C.2.2. The SS shall enable DL and UL CCA model on Cell 1 according to Table 11.2.1.7.5-1. T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.2.1.7.5-1 and 11.2.1.7.5-2.

6. UE shall transmit a *MeasurementReport* message triggered by Event B2.

7. SS shall transmit an *RRCReconfiguration* message implying handover to Cell 2.

8. The start of T3 is the next instant after the last TTI containing the *RRCReconfiguration* message implying handover is sent to the UE, at that instant the SS shall switch the power setting from T2 to T3 as specified in Table 11.2.1.7.5-1 and 11.2.1.7.5-2.

9. If the UE transmits the uplink PRACH channel to Cell 2 less than 85 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

10. The UE shall transmit *RRCConnectionReconfigurationComplete* message on Cell 2.

11. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model on Cell 1 (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

12. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.

13. Repeat step 2-12 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.2.1.7.4.3-1: Common Exception messages for NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-RAT and GAP NEEDED Table H.3.1-3A Table H.3.1-4A Table H.3.1-5 Table H.3.1-6 with Condition Pattern #0 Table H.3.1-7 with Condition INTER-RAT Table H.3.3-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.2.1.7.4.3-2: *PRACH-Config-DEFAULT* for NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell

Derivation Path: TS 36.508 [25], Table 4.6.3-7			
Information Element	**Value/remark**	**Comment**	**Condition**
PRACH-Config-DEFAULT ::= SEQUENCE {			
prach-ConfigInfo SEQUENCE {			
prach-ConfigIndex	4		Config 1
	53		Config 2
}			
}			

Table 11.2.1.7.4.3-3: *RRCConnectionReconfiguration* for NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell

Derivation Path: TS 36.508 [25], Table 4.6.1-8			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfiguration ::= SEQUENCE {			
securityConfigHO	Not present		
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v890-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v920-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1020-IEs	

nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1130-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1250-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1310-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1430-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1510-IEs	
nonCriticalExtension SEQUENCE {		RRCConnectionReconfiguration-v1530-IEs	
securityConfigHO-v1530 {			
handoverType-v1530 CHOICE {	fivegc-ToEPC-r15		
fivegc-ToEPC-r15 {			
securityAlgorithmConfig-r15 {			
cipheringAlgorithm	eea0		
integrityProtAlgorithm	eia1		
}			
nextHopChainingCount-r15	2		
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			

11.2.1.7.5 Test requirement

Tables 11.2.1.7.4.1-3, 11.2.1.7.5-1 and 11.2.1.7.5-2 define the primary level settings including test tolerances for NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell test case.

Table 11.2.1.7.5-1: Cell specific test parameters for NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell (Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2	1		
TDD Configuration		1, 2	TDDConf.1.1.CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})DL CCA probability P_{CCA_DL}		1, 2	0.9375		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2	0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2	0.75		
UL CCA probability for semi-static channel access P_{CCA_UL}		1, 2	0.75		
UL CCA probability for dynamic static channel access P_{CCA_UL}		1, 2	0.87		
$BW_{channel}$		1, 2	40: $N_{RB,c}$ = 106 (TDD)		

PDSCH reference measurement channel			1, 2	SR.1.1 CCA		
CORESET reference channel			1, 2	CR.1.1 CCA		
Dedicated CORESET RMC configuration			1, 2	CCR.1.1 CCA		
TRS configuration			1, 2	TRS.1.2 TDD		
OCNG pattern[Note1]			1, 2	OP.1		
BWP	Initial DL BWP		1, 2	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2	SMTC.1		
DBT window configuration			1, 2	As defined in A.12.1		
SSB configuration			1, 2	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access;		
b2-Threshold1		dBm	1, 2	-93		
EPRE ratio of PSS to SSS		dB	1, 2	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1, 2	-100	-104	-100
N_{oc}[Note2]		dBm/SCS	1, 2	-97	-101	-97
$\hat{E}_s/N_{oc}$		dB	1, 2	12	0	0
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2	12	0	0
SS-RSRP[Note3]		dBm/SCS	1, 2	-85	-101	-97
Io[Note3]		dBm/38.16 MHz	1, 2	-53.68	-66.93	-62.93
Propagation condition			1, 2	AWGN		
Antenna Configuration and Correlation Matrix			1, 2	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.2.1.7.5-2: Cell specific test parameters for NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell (Cell 2)

Parameter	Unit	Configuration	Cell 2

			T1	T2	T3
RF channel number		1, 2	2		
Duplex mode		1	FDD		
		2	TDD		
TDD special subframe configuration[Note1]		2	6		
TDD uplink-downlink configuration[Note1]		2	1		
$BW_{channel}$	MHz	1, 2	10 MHz: $N_{RB,c}$ = 50		
PRACH Configuration[Note2]		1	4		
		2	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1	10 MHz: R.3 FDD		
		2	10 MHz: R.0 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1	10 MHz: R.6 FDD		
		2	10 MHz: R.6 TDD		
OCNG Patterns[Note3]		1	10 MHz: OP.10 FDD		
		2	10 MHz: OP.1 TDD		
PBCH_RA	dB	1, 2	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1, 2	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	9.55	9.55
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2	-Infinity	9.55	9.55
RSRP[Note6]	dBm/15kHz	1, 2	-Infinity	-88.45	-88.45
SCH_RP[Note6]	dBm/15kHz	1, 2	-Infinity	-88.45	-88.45
Io[Note6]	dBm/9MHz	1, 2	-67.21	-57.20	-57.20
Propagation Condition		1, 2	AWGN		
Antenna Configuration and Correlation Matrix Note7		1, 2	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [24].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.3.1.0.1.

$T_{interrupt}$ = 35 ms in the test; $T_{interrupt}$ is defined in clause 6.3.1.0.1.

This gives a total of 85 ms.

11.2.1.8 NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell

11.2.1.8.1 Test purpose

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1 carrier under CCA. This test shall verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in clause 6.3.1.0.1.

11.2.1.8.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.1.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.1.8.

11.2.1.8.4 Test description

11.2.1.8.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 11.2.1.8.4.1-1.

Table 11.2.1.8.4.1-1: Supported test configurations for NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell

Configuration	Description of a cell with CCA	Description of a cell without CCA
11.2.1.8-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
11.2.1.8-2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: The UE supporting SA operation only on NR band(s) with shared spectrum access is required to be tested.		

Configure the test requirement and the DUT according to the parameters in Table 11.2.1.8.4.1-2.

Table 11.2.1.8.4.1-2: Initial conditions for NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	

Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.	

1. The general test parameter settings are set up according to Table 11.2.1.8.4.1-3.

2. Message contents are defined in clause 11.2.1.8.4.3.

3. The test comprises of one NR carrier under CCA and one E-UTRA carrier with one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. Cell 1 is configured according to Annex C.1.2 and C.1.3, Cell 2 is configured according to Annex A.6B.1.

Table 11.2.1.8.4.1-3: General test parameters for NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell on a carrier under CCA
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause D.7.2.1	
UL CCA model			As specified in clause D.7.2.2	
NR measurement quantity			SS-RSRP	
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
T1		s	≤5	
T2		s	1	

11.2.1.8.4.2 Test procedure

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable. No Gap pattern shall be configured.

A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the next instant after the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.2.1.8.5-1 and 11.2.1.8.5-2. The SS shall enable DL and UL CCA model on Cell 1 according to Table 11.2.1.6.5-1. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message implying handover to Cell 2.

4. The start of T2 is the instant when the last subframe containing the RRC Reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 11.2.1.8.5-1 and 11.2.1.8.5-2. T2 starts.

5. If the UE transmits the uplink PRACH channel to Cell 2 less than 165 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

6. The UE shall transmit *RRCConnectionReconfigurationComplete* message on Cell 2.

7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model on Cell 1 (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.

9. Repeat step 2-8 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.1.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.2.1.8.4.3-1: Common Exception messages for NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.3-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.2.1.8.4.3-2: *PRACH-Config-DEFAULT* for NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell

Derivation Path: TS 36.508 [25], Table 4.6.3-7			
Information Element	**Value/remark**	**Comment**	**Condition**
PRACH-Config-DEFAULT ::= SEQUENCE {			
prach-ConfigInfo SEQUENCE {			
prach-ConfigIndex	4		Config 1
	53		Config 2
}			
}			

11.2.1.8.5 Test requirement

Tables 11.2.1.8.4.1-3, 11.2.1.8.5-1 and 11.2.1.8.5-2 define the primary level settings including test tolerances for NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell test.

Table 11.2.1.8.5-1: Cell specific test parameters for NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell (Cell 1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
DL CCA probability for semi-static channel access (P_{CCA_DL})DL CCA probability P_{CCA_DL}		1, 2	0.9375	
DL CCA probability for dynamic channel access ($P_{CCA_DL_1}$)		1, 2	0.75	
DL CCA probability for dynamic channel access ($P_{CCA_DL_2}$)		1, 2	0.75	
UL CCA probability for semi-static channel access P_{CCA_UL}		1, 2	0.75	

UL CCA probability for dynamic static channel access P_{CCA_UL}			1, 2	0.87	
TDD Configuration			1, 2	TDDConf.1.1.CCA	
$BW_{channel}$		MHz	1, 2	40: $N_{RB,c}$ = 106 (TDD)	
PDSCH reference measurement channel			1, 2	SR.1.1 CCA	
CORESET reference channel			1, 2	CR.1.1 CCA	
Dedicated CORESET RMC configuration			1, 2	CCR.1.1 CCA	
TRS configuration			1, 2	TRS.1.2 TDD	
OCNG pattern[Note1]			1, 2	OP.1	
BWP	Initial DL BWP		1, 2	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2	SMTC.1	
DBT window configuration			1, 2	As defined in A.12.1	
SSB configuration			1, 2	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access;	
EPRE ratio of PSS to SSS		dB	1, 2	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1, 2	-98	
N_{oc}[Note2]		dBm/SCS	1, 2	-95	
$\hat{E}_s/N_{oc}$		dB	1, 2	0	0
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2	0	0
SS-RSRP[Note3]		dBm/SCS	1, 2	-95	-95
Io[Note3]		dBm/38.16 MHz	1, 2	-60.93	-60.93
Propagation condition			1, 2	AWGN	
Antenna Configuration and Correlation Matrix			1, 2	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.2.1.8.5-2: Cell specific test parameters for NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2	2	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	10 MHz: $N_{RB,c}$ = 50	
PRACH Configuration[Note2]		1	4	
		2	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1	10 MHz: R.3 FDD	
		2	10 MHz: R.0 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1	10 MHz: R.6 FDD	
		2	10 MHz: R.6 TDD	
OCNG Patterns[Note3]		1	10 MHz: OP.10 FDD	
		2	10 MHz: OP.1 TDD	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1, 2	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	7
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2	-Infinity	7
RSRP[Note6]	dBm/15kHz	1, 2	-Infinity	-91
SCH_RP[Note6]	dBm/15kHz	1, 2	-Infinity	-91
Io[Note6]	dBm/9MHz	1, 2	-67.21	-59.42
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix [Note7]		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [24].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

The UE shall start to transmit the PRACH to Cell 2 less than 165 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.3.1.0.1.

$T_{interrupt}$ = 115 ms in the test; $T_{interrupt}$ is defined in clause 6.3.1.0.1.

This gives a total of 165 ms.

11.2.2 RRC connection mobility control

11.2.2.1 RRC re-establishment

11.2.2.1.0 Minimum conformance requirements

11.2.2.1.0.1 Minimum conformance requirements for NR SA FR1 RRC re-establishment with CCA

In In RRC_CONNECTED state on the carrier w/o or with CCA the UE shall be capable of sending *RRCReestablishmentRequest* message within $T_{re\text{-}establish_delay_CCA}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re\text{-}establish_delay_CCA}$) shall be less than:

$$T_{re-establish_delay_CCA} = T_{UE_re-establish_delay_CCA} + T_{UL_grant}$$

T_{UL_grant}: It is the time required to acquire and process uplink grant from the target PCell with CCA. The uplink grant is required to transmit *RRCReestablishmentRequest* message.

The UE re-establishment on the carrier with CCA delay ($T_{UE_re\text{-}establish_delay_CCA}$) is the time between the moments when any of the conditions requiring RRC re-establishment on the carrier with CCA as defined in TS 38.331 [13] clause 5.3.7 is detected by the UE and when the UE sends PRACH to the target PCell on the carrier with CCA . The UE re-establishment delay requirement ($T_{UE_re\text{-}establish_delay_CCA}$) on the carrier with CCA shall be less than:

$$T_{UE_re-establish_delay_CCA} = 50\text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

The intra-frequency target NR cell with CCA shall be considered detectable if each relevant SSB can satisfy that:

- SS-RSRP related side conditions given in TS 38.133 [6] clause 10.1.2 and 10.1.3 are fulfilled for a corresponding NR Band for FR1 and FR2-2, respectively, and
- the conditions of SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.2 for a corresponding NR Band are fulfilled.

The inter-frequency target NR cell on the carrier with CCA shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in TS 38.133 [6] clause 10.1.4 and 10.1.5 are fulfilled for a corresponding NR Band for FR1 and FR2-2, respectively, and
- the conditions of SSB_RP and SSB Ês/Iot according to TS 38.133 [6] Annex B.2.3 for a corresponding NR Band are fulfilled.

$T_{identify_intra_NR_CCA}$: If the target intra-frequency carrier is the carrier without CCA, it is the time to identify the target intra-frequency NR cell which is defined in clause 6.3.2.1.0; otherwise it is the time to identify the target intra-frequency NR cell on the carrier with CCA and it depends on whether the target NR cell on the carrier with CCA is known cell or unknown cell and on the frequency range (FR) of the target NR cell on the carrier with CCA. If the UE is not configured with intra-frequency NR carrier with CCA for RRC re-establishment then $T_{identify_intra_NR_CCA}$=0; otherwise $T_{identify_intra_NR_CCA}$ shall not exceed the values defined in Table 11.2.2.1.0.1-1.

$T_{identify_inter_NR_CCA,i}$: If the target inter-frequency carrier is the carrier without CCA, it is the time to identify the target inter-frequency NR cell which is defined in clause 6.3.2.1.0; otherwise it is the time to identify the target inter-frequency NR cell on inter-frequency carrier *i* with CCA configured for RRC re-establishment and it depends on whether the target NR cell on the inter-frequency carrier with CCA is known or unknown. $T_{identify_inter_NR_CCA,i}$ shall not exceed the values defined in Table 11.2.2.1.0.1-2.

T_{SMTC}: It is the periodicity of the SMTC occasion configured for the intra-frequency carrier. If the UE has been provided with higher layer in TS 38.331 [13] signaling of *smtc2*, T_{smtc} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier *i*. If it is not configured, the UE may assume that the target SSB periodicity is not larger than 20 ms.

$T_{SI\text{-}NR_CCA}$: It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [13] for the target NR cell on the carrier with CCA.

T_{PRACH_CCA} is the delay uncertainty in acquiring the first available PRACH occasion in the target NR Cell on the carrier with CCA:

$T_{PRACH_CCA} = (1+ K_3)*T_{SSB,RO} + 10$ ms, where:

- $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined inTable 8.1-1 of TS 38.213 [8].
- K_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $K_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [37]. $L_3 = 0$ if *ra-ChannelAccess-r17* is not configured in FR2-2.

N_{freq}: It is the total number of NR frequencies to be monitored for RRC re-establishment; $N_{freq} = 1$ if the target NR cell on the intra-frequency carrier with CCA is known, else $N_{freq} = 2$ and $T_{identify_intra_NR_CCA} = 0$ if the target NR cell on the inter-frequency carrier with CCA is known.

There is no requirement if the target cell on the carrier with CCA does not contain the UE context.

In the requirement defined in the below tables, the target FR1 cell on the carrier with CCA is known if it has been meeting the relevant cell identification requirement during the last 8 seconds otherwise it is unknown.

Table 11.2.2.1.0.1-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell with CCA

Serving cell SSB Ês/Iot (dB)	Frequency range (FR) of target NR cell	$T_{identify_intra_NR_CCA}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, (5+K_1) x T_{SMTC})	MAX (800 ms, (10+ K_1) x T_{SMTC})
≥ -8	FR2-2	N/A	MAX (1000 ms, N x (10+ K_3) x T_{SMTC})
< -8	FR1	N/A	(800+20 x K_1)[Note1]
< -8	FR2-2	N/A	N x (440+20 x K_3)[Note1]
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer with CCA when T_{SMTC} > 20 ms and serving cell SSB Ês/Iot < -8 dB.			
Note 2: K_1 is the number of SMTC occasions not available at the UE due during RRC re-establishment period on the carrier with CCA.			
Note 3: K_3 is the number of SMTC occasion groups not available at the UE during RRC re-establishment period on the carrier with CCA. An SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. N is equal to 12.			

Table 11.2.2.1.0.1-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell on the carrier with CCA

Serving cell SSB Ês/Iot (dB)	Frequency range (FR) of target NR cell	$T_{identify_inter_NR_CCA,\ i}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, ([6]+$K_{2,i}$) x $T_{SMTC,\ i}$)	MAX (800 ms, ([13]+$K_{2,i}$) x $T_{SMTC,\ i}$)
< -8	FR1	N/A	(800+20 x $K_{2,i}$) [Note1]
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer with CCA when $T_{SMTC,i}$ > 20 ms and serving cell SSB Ês/Iot < -8 dB.			
Note 2: $K_{2,i}$ is the number of SMTC occasions not available at the UE during RRC re-establishment period on the “i” th carrier with CCA,			

The normative reference for this requirement is TS 38.133 [6] clause 6.2.1A.2.

11.2.2.1.1 NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1

11.2.2.1.1.1 Test purpose

The purpose is to verify that the NR intra-frequency RRC re-establishment delay with CCA in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 11.2.2.1.0.1.

11.2.2.1.1.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.2.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.2.1.1.

11.2.2.1.1.4 Test description

11.2.2.1.1.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 11.2.2.1.1.4.1-1

Table 11.2.2.1.1.4.1-1: Supported test configurations for NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1

Configuration	Description
11.2.2.1.1-1	With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test requirement and the DUT according to the parameters in Table 11.2.2.1.1.4.1-2

Table 11.2.2.1.1.4.1-2: Initial conditions for NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.2.2.1.1.4.1-3.
2. Message contents are defined in clause 11.2.2.1.1.4.3.

There is one NR carrier and two cells under CCA specified in the test. Cell 1 is the cell used for registration with the power levels set according to Annex C.1.2 and C.1.3 for this test.

Table 11.2.2.1.1.4.1-3: General test parameters for NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1

Parameter	Unit	Value	Comment

Initial Condition	Active cell	-	Cell1	Cell 1 is with CCA.
	Neighbour cells	-	Cell2	Cell 2 is with CCA.
Final condition	Active cell	-	Cell2	
RF Channel Number		-	1	
DL CCA model	Dynamic channel access Note 1, 3	-	As specified in clause D.7.2.1	
	Semi-static channel access Note 2, 3	-		
UL CCA model	Dynamic channel access Note 1, 3	-	As specified in clause D.7.2.2	
	Semi-static channel access Note 2,3	-		
Time offset between cells		-	3 μs	Synchronous cells
N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	3000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration	Dynamic channel access Note 1, 3	-	SSB.2 CCA	Table A.3A.1
	Semi-static channel access Note 2, 3	-	SSB.1 CCA	Table A.3A.1
DBT window configuration		-	DBT.1	Table A.12.1
SMTC configuration		-	SMTC pattern 1	
DRX cycle length		s	OFF	
PRACH configuration		-	FR1 PRACH configuration 1 under CCA	Table A.7.1A.1
T1		s	5	
T2		ms	480	Time for the UE to detect RLF
T3		s	2	
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

11.2.2.1.1.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell with CCA, is deactivated. The time period T3 starts after the occurrence of the radio link failure. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.

2. Set the parameters according to T1 in Table 11.2.2.1.1.5-1. The SS shall enable DL and UL CCA model according to Table 11.2.2.1.1.5-1. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.2.2.1.1.5-1. T2 starts

6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 11.2.2.1.1.5-1. T3 starts

7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within 1350 + MAX (200, (5+K_1) x 20) ms from the beginning of time period T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).

9. Repeat step 2-8 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.2.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3with the following exceptions:

Table 11.2.2.1.1.4.3-1: Common Exception messages for NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, and Synchronous cells Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.2.2.1.1.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
t311	ms3000		
}			

Table 11.2.2.1.1.4.3-3: *MeasConfig* for NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1

Derivation Path: TS 38.508-1 [14], Table 4.6.3-69			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
quantityConfig	Not present		
}			

11.2.2.1.1.5 Message contents

Table 11.2.2.1.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1 test case.

Table 11.2.2.1.1.5-1: Cell specific test parameters for NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration	-	TDDConf.1.1 CCA			TDDConf.1.1 CCA		

DL CCA probability P_{CCA_DL} for dynamic channel access Note 4,6	-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		
DL CCA probability P_{CCA_DL} for semi-static channel access Note 5,6	-	P_{CCA_DL}=0.9375			P_{CCA_DL}=0.9375		
UL CCA probability P_{CCA_UL}	-	1			1		
PDSCH RMC configuration		SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET RMC configuration		CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET RMC configuration		CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		OP.1			OP.1		
TRS configuration		TRS.1.2 TDD			N/A		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1.54	-infinity	-infinity	-3.79	4	4
N_{oc} Note2	dBm/SCS	-95					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s / N_{oc}$	dB	7	-infinity	-infinity	4	4	4
SS-RSRP Note3	dBm/SCS	-88	-infinity	-infinity	-91	-91	-91
Io	dBm/38.16 MHz	-54.65	-58.50	-58.50	-54.65	-58.50	-58.50
Propagation Condition		AWGN					

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

NOTE 4: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.

NOTE 5: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.

NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell with CCA shall be less than 1350 + MAX (200, $(5+K_1)$ x 20) ms.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re-establish_delay_CCA} = T_{UE_re-establish_delay_CCA} + T_{UL_grant}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay_CCA} = 50 \text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

Where

N_{freq} = 1

$T_{identify_intra_NR_CCA}$ = MAX (200 ms, (5+K_1) x T_{SMTC}), where

K_1 is the number of SMTC occasions not available at the UE due to DL CCA failures during RRC re-establishment period on the carrier with CCA.

T_{SMTC} = 20 ms is the SMTC periodicity.

$T_{identify_inter_NR_CCA}$ = 0 ms

T_{SI-NR_CCA} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [13] for the target intra-frequency NR cell.

T_{PRACH_CCA} = $T_{SSB,RO}$ + 10 ms, where:

- $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [8], which is $T_{SSB,RO}$=10 ms for FR1 PRACH configuration 1 under CCA.

This gives a total of 1350 + MAX (200, (5+K_1) x 20) ms.

11.2.2.1.2 NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1

11.2.2.1.2.1 Test purpose

The purpose is to verify that the NR inter-frequency RRC re-establishment delay with CCA in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 11.2.2.1.0.1.

11.2.2.1.2.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.2.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.2.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.2.1.2.

11.2.2.1.2.4 Test description

11.2.2.1.2.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 11.2.2.1.2.4.1-1

Table 11.2.2.1.2.4.1-1: Supported test configurations for NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1

Configuration	Description

11.2.2.1.2-1	With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test requirement and the DUT according to the parameters in Table 11.2.2.1.2.4.1-2

Table 11.2.2.1.2.4.1-2: Initial conditions for NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.2.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.2.2.1.2.4.1-3.
2. Message contents are defined in clause 11.2.2.1.2.4.3.

There are two NR carriers and one cell on each carrier both of which are subject to CCA. Cell 1 is the cell used for registration with the power levels set according to Annex C.1.2 and C.1.3 for this test.

Table 11.2.2.1.2.4.1-3: General test parameters for NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1

Parameter		Unit	Value	Comment
Initial Condition	Active cell	-	Cell1	Cell 1 is with CCA.
	Neighbour cells	-	Cell2	Cell 2 is with CCA.
Final condition	Active cell	-	Cell2	
RF Channel Number		-	1, 2	
DL CCA model	Dynamic channel access Note 1, 3	-	As specified in clause D.7.2.1	
	Semi-static channel access Note 2, 3	-		
UL CCA model	Dynamic channel access Note 1, 3	-	As specified in clause D.7.2.2	
	Semi-static channel access Note 2, 3	-		
Time offset between cells		-	3 μs	Synchronous cells
N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	3000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration	Dynamic channel access Note 1, 3	-	SSB.2 CCA	Table A.3A.1
	Semi-static channel access Note 2, 3	-	SSB.1 CCA	Table A.3A.1
DBT window configuration		-	DBT.1	Table A.12.1
SMTC configuration		-	SMTC pattern 1	
DRX cycle length		s	OFF	
PRACH configuration		-	FR1 PRACH configuration 1 under CCA	Table A.7.1A.1

T1	s	5	
T2	ms	200	Time for the UE to detect RLF
T3	s	2	
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.			

11.2.2.1.2.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell with CCA, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.
2. Set the parameters according to T1 in Table 11.2.2.1.2.5-1. The SS shall enable DL and UL CCA model according to Table 11.2.2.1.2.5-1. T1 starts.
3. SS shall transmit an *RRCReconfiguration* message.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.2.2.1.2.5-1. T2 starts
6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 11.2.2.1.2.5-1. T3 starts
7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within MAX (200 ms, (6+K2,1) x TSMTC, 1) + 1340 ms from the beginning of time period T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
9. Set cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.2.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3with the following exceptions:

Table 11.2.2.1.1.4.3-1: Common Exception messages for NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, and Synchronous cells Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.2.2.1.2.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
t311	ms3000		
}			

Table 11.2.2.1.2.4.3-3: *MeasConfig* for NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1

Derivation Path: TS 38.508-1 [14], Table 4.6.3-69			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
quantityConfig	Not present		
}			

11.2.2.1.2.5 Message contents

Table 11.2.2.1.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1 test case.

Table 11.2.2.1.2.5-1: Cell specific test parameters for NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability P_{CCA_DL} for dynamic channel access Note 4,6	-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		
DL CCA probability P_{CCA_DL} for semi-static channel access Note 5,6	-	P_{CCA_DL}=0.9375			P_{CCA_DL}=0.9375		
UL CCA probability P_{CCA_UL}	-	1			1		
PDSCH RMC configuration		SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET RMC configuration		CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET RMC configuration		CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		OP.1			OP.1		
TRS configuration		TRS.1.2 TDD			N/A		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	7	-infinity	-infinity	-infinity	-infinity	4

N_{oc} Note2	dBm/SCS	-95					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s / N_{oc}$	dB	7	-infinity	-infinity	-infinity	-infinity	4
SS-RSRP Note3	dBm/SCS	-88	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/38.16MHz	-56.15	-63.94	-63.94	-63.94	-63.94	-58.49
Propagation Condition		AWGN					

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 5: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than $T_{re-establish_{delay_{CCA}}}$.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re-establish_{delay_{CCA}}} = T_{UE_{re-establish_{delay_{CCA}}}} + T_{UL_{grant}}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay_CCA} = 50 \text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

Where

$T_{identify_intra_NR_CCA}$: 0 ms

$T_{identify_inter_NR_CCA,i}$: MAX (200 ms, (6+K2,i) x TSMTC, i),

where

K2,i is the number of SMTC not available at the UE during RRC re-establishment period on the "i" th carrier with CCA

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier *i*.

N_{freq} = 2

T_{SI-NR_CCA} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [13] for the target inter-frequency NR cell.

T_{PRACH_CCA} = (1+ K_3)*$T_{SSB,RO}$ + 10 ms, where:

- $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [8].
- K_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $K_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [37].

This gives a total of $T_{re-establish_{delay_{CCA}}}$ = 50 + MAX (200 ms, (6+K2,1) x TSMTC, 1) + 1280 + (1+ K_3)*$T_{SSB,RO}$ + 10 ms.

11.2.2.1.3 NR SA FR1 Intra-frequency RRC Re-establishment with CCA without serving cell timing

11.2.2.1.3.1 Test purpose

The purpose is to verify that the NR intra-frequency RRC re-establishment delay with CCA in FR1 without serving cell timing is within the specified limits and to verify the requirements in TS 38.133 [6] clause 6.2.1A.

11.2.2.1.3.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.2.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.2.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.2.1.3.

11.2.2.1.3.4 Test description

11.2.2.1.3.4.1 Initial conditions

The test shall be tested using any of the test configuration in Table 11.2.2.1.3.4.1-1

Table 11.2.2.1.3.4.1-1: Supported test configurations for NR SA FR1 Intra-frequency RRC Re-establishment with CCA without serving cell timing in FR1

Configuration	Description
11.2.2.1.3-1	With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test requirement and the DUT according to the parameters in Table 11.2.2.1.3.4.1-2

Table 11.2.2.1.3.4.1-2: Initial conditions for NR SA FR1 Intra-frequency RRC Re-establishment with CCA without serving cell timing in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.2.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.2.2.1.3.4.1-3.
2. Message contents are defined in clause 11.2.2.1.3.4.3.

3. There is one NR carrier and two cells under CCA specified in the test. Cell 1 is the cell used for registration with the power levels set according to Annex C.1.2 and C.1.3 for this test.

Table 11.2.2.1.3.4.1-3: General test parameters for NR SA FR1 Intra-frequency RRC Re-establishment with CCA without serving cell timing in FR1

Parameter		Unit	Value	Comment
Initial Condition	Active cell	-	Cell 1	Cell 1 is with CCA.
	Neighbour cells	-	Cell 2	Cell 2 is with CCA.
Final condition	Active cell	-	Cell 2	
RF Channel Number		-	1	
DL CCA model	Dynamic channel access Note 1,3	-	As specified in clause D.7.2.1	
	Semi-static channel access Note 2,3	-		
UL CCA model	Dynamic channel access Note 1,3	-	As specified in clause D.7.2.2	
	Semi-static channel access Note 2,3	-		
L_{CCA_DL}			5	
W_{CCA_DL}		ms	T311	
L_{CCA_UL}			5	
W_{CCA_UL}		ms	T311	
Time offset between cells		-	3 μs	Synchronous cells
N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	3000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration	Dynamic channel access Note 1, 3	-	SSB.2 CCA	Table A.3A.1
	Semi-static channel access Note 2, 3	-	SSB.1 CCA	Table A.3A.1
DBT window configuration		-	DBT.1	Table A.12.1
SMTC configuration		-	SMTC pattern 1	
DRX cycle length		s	OFF	
PRACH configuration		-	FR1 PRACH configuration 1	Table A.7.1A.1
T1		s	5	
T2		ms	520	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1A in TS 38.133 [6], T310 and the period for UE turns off transmitter)
T3		s	≥ $T_{UE_re-establish_delay_CCA}$	As defined in clause 6.2.1A in TS 38.133 [6]
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.				

11.2.2.1.3.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell with CCA, is deactivated. The time period T3 starts after the occurrence of the radio link failure. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.
2. Set the parameters according to T1 in Table 11.2.2.1.3.5-1. The SS shall enable DL and UL CCA model according to Table 11.2.2.1.3.5-1. T1 starts.
3. SS shall transmit an *RRCReconfiguration* message.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.2.2.1.3.5-1. T2 starts
6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 11.2.2.1.3.5-1. T3 starts
7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within 1870 + MAX (800 ms, (10+ K_1) x 20) ms from the beginning of time period T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
9. Set cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.2.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.2.2.1.3.4.3-1: Common Exception messages for NR SA FR1 Intra-frequency RRC Re-establishment with CCA without serving cell timing in FR1

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, and Synchronous cells Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.2.2.1.3.4.3-2: *RLF-TimersAndConstants for intra-frequency RRC re-establishment*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
t311	ms3000		
}			

Table 11.2.2.1.3.4.3-3: *MeasConfig* for NR SA FR1 Intra-frequency RRC Re-establishment with CCA without serving cell timing in FR1

Derivation Path: TS 38.508-1 [14], Table 4.6.3-69			
Information Element	**Value/remark**	**Comment**	**Condition**

MeasConfig::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
quantityConfig	Not present		
}			

11.2.2.1.3.5 Test requirement

Table 11.2.2.1.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 RRC re-establishment without serving cell timing test case.

Table 11.2.2.1.3.5-1: Cell specific test parameters for NR SA FR1 RRC re-establishment with CCA without serving cell timing

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability P_{CCA_DL} for dynamic channel access Note 4,6	-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75			$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		
DL CCA probability P_{CCA_DL} for semi-static channel access Note 5,6	-	P_{CCA_DL}=0.9375			P_{CCA_DL}=0.9375		
UL CCA probability P_{CCA_UL}	-	1			1		
PDSCH RMC configuration		SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET RMC configuration		CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET RMC configuration		CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		OP.1			OP.1		
TRS configuration		TRS.1.2 TDD			N/A		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	4	-infinity	-infinity	-infinity	-infinity	4
N_{oc} Note2	dBm/SCS	-95					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s/N_{oc}$	dB	4	-infinity	-infinity	-infinity	-infinity	4
SS-RSRP Note3	dBm/SCS	-91	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/38.16 MHz	-58.49	-63.94	-58.49	-58.49	-63.94	-58.49
Propagation Condition		AWGN					

NOTE 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{OC} to be fulfilled.
NOTE 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4:	For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 5:	For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 6:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to Cell 2 for sending the *RRCReestablishmentRequest* message to Cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 1350 + MAX (800 ms, (10+ K_1) x 20) ms.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re-establish_delay_CCA} = T_{UE_re-establish_delay_CCA} + T_{UL_grant}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay_CCA} = 50 \text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

Where,

N_{freq} = 1

$T_{identify_intra_NR}$ = MAX (800 ms, (10+ K_1) x T_{SMTC}), where

K_1 is the number of SMTC occasions not available at the UE due to DL CCA failures during RRC re-establishment period on the carrier with CCA.

T_{SMTC} is the SMTC periodicity which is 20ms.

$T_{identify_inter_NR_CCA}$ = 0 ms

T_{SI-NR_CCA} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [13] for the target intra-frequency NR cell.

T_{PRACH_CCA} = (1+ K_3)*$T_{SSB,RO}$ + 10 ms, where:

- $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [8]. It is 10 ms for FR1 PRACH configuration 1 under CCA.
- K_3 = 0.

This gives total $T_{UE_re-establish_delay_CCA}$=1350 + MAX (800 ms, (10+ K_1) x 20) ms, allow 1870 + MAX (800 ms, (10+ K_1) x 20) ms from the beginning of T2 in the test case.

11.2.2.1.4 NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA

11.2.2.1.4.1 Test purpose

The purpose is to verify that the NR inter-frequency RRC re-establishment delay requirement for RRC re-establishment from NR FR1 carrier without CCA to NR FR1 inter-frequency carrier under CCA with unknown target cell. These tests will verify the requirements in clause 11.2.2.1.0.1.

11.2.2.1.4.2 Test applicability

This test applies to all types of NR UE from release 16 and forward, supporting standalone NR-U, RRM measurements, support of MIB and SIB1 acquisition on shared spectrum and UL with a shared spectrum NR carrier.

11.2.2.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.2.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.2.1.4.

11.2.2.1.4.4 Test description

11.2.2.1.4.4.1 Initial conditions

The Test shall be tested using any of the test configuration in Table 11.2.2.1.4.4.1-1

Table 11.2.2.1.4.4.1-1: Supported test configurations for NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA

Configuration	Source cell without CCA	Target cell with CCA
11.2.2.1.4-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
11.2.2.1.4-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
11.2.2.1.4-3	30 kHz SSB SCS, 40 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations		

Configure the test requirement and the DUT according to the parameters in Table 11.2.2.1.4.4.1-2

Table 11.2.2.1.4.4.1-2: Initial conditions for NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.2.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.2.2.1.4.4.1-3.
2. Message contents are defined in clause 11.2.2.1.4.4.3.

The test scenario comprises of 2 cells on 2 different NR carriers where the second carrier is subject to CCA. UE camps on Cell 1 on carrier 1 whichis not subject to CCA and is the cell used for registration with the power levels set according to Annex C.1.2 and C.1.3 for this test.

Table 11.2.2.1.4.4.1-3: General test parameters for NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2	
Final condition	Active cell		Cell2	
RF Channel Number			1, 2	
Time offset between cells			3 μs	Synchronous cells
DL CCA model	Dynamic channel access Note 1,3	-	As specified in clause D.7.2.1	
	Semi-static channel access Note 2,3	-		
UL CCA model	Dynamic channel access Note 1,3	-	As specified in clause D.7.2.2	
	Semi-static channel access Note 2,3	-		
N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	5000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	OFF	
PRACH configuration			FR1 PRACH configuration 1	Table A.7.1A.1
T1		s	5	
T2		ms	480	Time for the UE to detect RLF
T3		s	≥ $T_{UE_re\text{-}establish_delay_CCA}$	As defined in clause 11.2.2.1.0.1
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.				

11.2.2.1.4.4.2 Test procedure

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1. The CCA model (both DL and UL) is disabled on Cell 2 (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.

2. Set the parameters according to T1 in Table 11.2.2.1.4.5-1. The SS shall enable DL and UL CCA model on Cell 2 according to Table 11.2.2.1.4.5-1. T1 starts.

3. SS shall transmit an *RRCReconfiguration* message.

4. The UE shall transmit *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.2.2.1.4.5-1. T2 starts

6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 11.2.2.1.4.5-1. T3 starts

7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within 1350+MAX (800 ms, (10+ K_1) x 20) ms+MAX (800 ms, ([13]+$K_{2,2}$) x 20) ms from the beginning of time period T3, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. The SS shall disable the CCA model on Cell 2 (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).

9. Set cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.2.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3with the following exceptions:

Table 11.2.2.1.4.4.3-1: Common Exception messages for NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1
Specific message contents exceptions for Test Configuration 11.2.2.1.4-1	Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1
Specific message contents exceptions for Test Configuration 11.2.2.1.4-2	Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1 and Synchronous cells
Specific message contents exceptions for Test Configuration 11.2.2.1.4-3	Table H.3.1-3 with Condition INTER-FREQ MO, SSB.2 FR1 and Synchronous cells

Table 11.2.2.1.4.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
t311	ms5000		
}			

Table 11.2.2.1.4.4.3-3: *MeasConfig* for NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-69			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig::= SEQUENCE {			
reportConfigToAddModList	Not present		
measIdToAddModList	Not present		
quantityConfig	Not present		
}			

11.2.2.1.4.5 Message contents

Table 11.2.2.1.4.5-1 defines the primary level settings including test tolerances for NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA test case.

Table 11.2.2.1.4.5-1: Cell specific test parameters for NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA

Parameter		Test config	Unit	Cell 1			Cell 2		
				T1	T2	T3	T1	T2	T3
TDD configuration		1		N/A			TDDConf.1.1.CCA		
		2		TDDConf.1.1			TDDConf.1.1.CCA		
		3		TDDConf.2.1			TDDConf.1.1.CCA		
PDSCH RMC configuration		1		SR.1.1 FDD			SR.1.1 CCA		
		2		SR.1.1 TDD			SR.1.1 CCA		
		3		SR.2.1 TDD			SR.1.1 CCA		
RMSI CORESET RMC configuration		1		CR.1.1 FDD			CR.1.1 CCA		
		2		CR.1.1 TDD			CR.1.1 CCA		
		3		CR.2.1 TDD			CR.1.1 CCA		
Dedicated CORESET RMC configuration		1		CCR.1.1 FDD			CCR.1.1 CCA		
		2		CCR.1.1 TDD			CCR.1.1 CCA		
		3		CCR.2.1 TDD			CCR.1.1 CCA		
OCNG Pattern		1		OP.1			OP.1		
TRS configuration		1		TRS.1.1 FDD			TRS.1.2 TDD		
		2		TRS.1.1 TDD			TRS.1.2 TDD		
		3		TRS.1.2 TDD			TRS.1.2 TDD		
SMTC configuration		1,2,3		SMTC.1			SMTC.1		
SSB configuration	Semi- static channel acces	1,2		SSB.1 FR1			SSB.1 CCA		
	Semi- static channel acces	3		SSB.2 FR1			SSB.1 CCA		
	Dymamic channel acces	1,2		SSB.1 FR1			SSB.2 CCA		
	Dymamic channel acces	3		SSB.2 FR1			SSB.2 CCA		
Initial DL BWP configuration		1,2,3		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3		ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1,2,3		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1,2,3		ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
DL CCA probability for semi-static channel access (P_{CCA_DL})		1,2,3		N/A	N/A	N/A	1	1	0.9375
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1,2,3		N/A	N/A	N/A	1	1	0.75
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1,2,3		N/A	N/A	N/A	1	1	0.75
UL CCA probability (P_{CCA_UL})		1,2,3		N/A	N/A	N/A	1	1	1
RLM-RS		1,2,3		SSB			SSB		
$\hat{E}_s/I_{ot}$		1,2,3	dB	4	-infinity	-infinity	-infinity	-infinity	7
N_{oc} Note2		1,2,3	dBm/15 KHz	-98					
N_{oc} Note2		1,2	dBm/SCS	-98					
		3		-95					
$\hat{E}_s/N_{oc}$		1,2,3	dB	4	-infinity	-infinity	-infinity	-infinity	7
SS-RSRP Note3		1, 2	dBm/SCS	-94	-infinity	-infinity	-infinity	-infinity	-88
		3		-91	-infinity	-infinity	-infinity	-infinity	-88
Io		1,2	dBm/Ch BW	-64.59	-70. 05	-70. 05	-63.94	-63.94	-56.15
		3	dBm/Ch BW	-58.50	-63.94	-63.94	-63.94	-63.94	-56.15
Propagation Condition		1,2,3		AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause D.7.2.
Note 5:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less $T_{UE_re-establish_delay_CCA}$.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re-establish_delay_CCA} = T_{UE_re-establish_delay_CCA} + T_{UL_grant}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay_CCA} = 50\text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

N_{freq} = 2

$T_{identify_intra_NR_CCA}$ = MAX (800 ms, (10+ K_1) x 20) ms

$T_{identify_inter_NR_CCA}$ = MAX (800 ms, (13+$K_{2,2}$) x 20) ms

T_{SI-NR_CCA} = 1280 ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 [13] for the target inter-frequency NR cell.

T_{PRACH_CCA} = It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{PRACH_CCA} = (1+ K_3)*$T_{SSB,RO}$ + 10 ms; where K_3=0 and $T_{SSB,RO}$=10 ms for FR1 PRACH configuration 1 under CCA.

K_1 is the number of SMTC occasions not available at the UE due during RRC re-establishment period on the carrier with CCA and with RF channel number # 1.

$K_{2,2}$ is the number of SMTC occasions not available at the UE during RRC re-establishment period on the carrier with CCA and with RF channel number # 2.

This gives total $T_{UE_re-establish_delay_CCA}$=1350+MAX (800 ms, (10+ K_1) x 20) ms+MAX (800 ms, (13+$K_{2,2}$) x 20) ms.

11.2.2.2 Random Access

11.2.2.2.0 Minimum conformance requirements

11.2.2.2.0.1 Minimum conformance requirements for 4-step RA type

11.2.2.2.0.1.1 Minimum conformance requirements for Contention based random access

The random access procedure is used to establish uplink time synchronization for a UE which either has not acquired or has lost its uplink synchronization, or to convey UE's request Other SI, or for beam failure recovery. The random

access is specified in clause 8 of TS 38.213 [8] and the control of the RACH transmission is specified in clause 5.1 of TS 38.321 [12].

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [8] and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [2]. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [2].

The UE shall indicate a random access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4 in TS 38.321 [12].

The UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SSB is configured, as specified in clause 5.1.2 in TS 38.321 [12].

If the UL CCA is successful on the next available PRACH occasion, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [13] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall perform the Random Access Resource selection procedure again, as specified in clause 5.1.3 in TS 38.321 [12].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [13] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3 in TS 38.321 [12].

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SSB is configured, as specified in clause 5.1.2 in TS 38.321 [12].

If the UL CCA is successful on the next available PRACH occasion, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [13] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall perform the Random Access Resource selection procedure again, as specified in clause 5.1.3 in TS 38.321 [12].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [13] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], if the UL CCA is successful, and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [12].

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission, if the UL CCA is successful,

If the UL CCA is successful, The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires and the UL CCA is successful, unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2A.2.

11.2.2.2.0.1.2 Minimum conformance requirements for Non-Contention based random access

If the UL CCA is successful on the next available PRACH occasion and if the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

If the UL CCA is successful, and if the random access procedure is initialized for beam failure recovery and if the contention-free Random Access Resources and the contention-free PRACH occasions for beam failure recovery request associated with SSBs configured, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [12].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [13] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall perform the Random Access Resource selection procedure again, as specified in clause 5.1.3 in TS 38.321 [12].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [13] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE may stop monitoring for Random Access Response(s) and shall monitor the Other SI transmission if the Random Access Response only contains a Random Access Preamble identifier which is corresponding to the transmitted Random Access Preamble and the random access procedure is initialized for SI request from UE, as specified in clause 5.1.4 in TS 38.321 [12].

The UE may stop monitoring for Random Access Response(s), if the contention-free Random Access Preamble for beam failure recovery request was transmitted and if the PDCCH addressed to UE's C-RNTI is received, as specified in clause 5.1.4 in TS 38.321 [12].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion if the UL CCA is successful, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [12] for the next available PRACH occasion if the UL CCA is successful, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2A.2.

11.2.2.2.0.2 Minimum conformance requirements for 2-step RA type

11.2.2.2.0.2.1 Minimum conformance requirements for Contention based random access

The UE shall have capability to calculate MsgA PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [8] and the MsgA PUSCH power formula of clause 7.1.1 of TS 38.213 [8] and apply this power level at the first MsgA or additional MsgA repetitions. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [2]. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [2].

The UE shall switch to 4-step RA type procedure if the MsgA transmission counter has exceeded *msgA-TransMax*, if configured, as specified in clause 5.1.4a of TS 38.321 [12]. The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4a in TS 38.321 [12].

The requirements in this clause apply for UE operating in a carrier frequency with CCA in SA operation mode or any MR-DC operation mode, in a carrier frequency with CCA.

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, the UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2a in TS 38.321 [12].

If the UL CCA is successful on the next available PRACH occasion, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, UE shall have the capability to transmit MsgA PRACH on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured.

The PRACH preamble and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [12].

In association with the MsgA PRACH, if the UL CCA is successful, the UE shall be able to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [8].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [13] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and perform the Random Access Resource selection procedure, as specified in clause 5.1.3a in TS 38.321 [12].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [13] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3a in TS 38.321 [12]. If the Random Access Procedure is not complete and the UE is configured with *msgA-TransMax* then, as specified in clause 5.1.3a in TS 38.321 [12], the UE shall perform the Random Access Resource

selection procedure with 4-step RA type provided that PREAMBLE_TRANSMISSION_COUNTER = *msgA-TransMax* + 1.

The UE shall stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [8] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [12].

If the UL CCA is successful, the UE shall send ACK if Success RAR is received in MsgB and the Contention Resolution is successful, as defined in clause 5.1.4a in TS 38.321 [12].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH if the UL CCA is successful, and monitor contention resolution as described in clause 8.2A in TS 38.213 [8].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power, if the UL CCA is successful on the next available PRACH occasion, when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [12].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12], and if the UL CCA is successful, transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful on the next available PRACH occasion when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2A.3.

11.2.2.2.0.2.2 Minimum conformance requirements for Non-Contention based random access

If the UL CCA is successful, if the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [12].

In association with the MsgA PRACH, the UE shall be able to transmit MsgA PUSCH, if the UL CCA is successful, on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [8].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [13] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall have cancelled the transmission of the MsgA payload on the associated PUSCH resource and perform the Random Access Resource selection procedure, as specified in clause 5.1.3a in TS 38.321 [12].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [13] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [12], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3a in TS 38.321 [12]. If the Random Access Procedure is not complete and the UE is configured with *msgA-TransMax* then, as specified in clause 5.1.3a in TS 38.321 [12], the UE shall perform the Random Access Resource selection procedure with 4-step RA type provided that PREAMBLE_TRANSMISSION_COUNTER = *msgA-TransMax* + 1.

The UE may stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [8] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [12].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH if the UL CCA is successful, as described in clause 8.2A in TS 38.213 [8].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12] for the next available PRACH occasion, and transmit the preamble with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful, if all received MsgBs contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [12] for the next available PRACH occasion, and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful on the next available PRACH occasion, if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA* and the Random Access Response Reception has not been considered as successful as defined in clause 5.1.4a in TS 38.321 [12].

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2A.3.

11.2.2.2.1 NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

11.2.2.2.1.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 11.2.2.2.0.1 and 38.133 [6] Clause 7.1.2 in an AWGN model.

11.2.2.2.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting RRM measurements and UL in shared channel access.

11.2.2.2.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 11.2.2.2.0.1.1.

The normative reference for this requirement is TS 38.133 [6] clauses A.11.2.2.2.1.

11.2.2.2.1.4 Test description

The test consists of a single cell, configured as PCell in an unlicensed FR1 carrier. The System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

For all tests described in section 11.2.2.2.1, the following three requirements apply:

- The System Simulator shall implement the UL CCA model of D.7.2.2 for the RACH occasions where PRACH transmissions are expected. The System Simulator shall monitor the RACH occasions to detect if the UE is transmitting PRACH preambles. If a PRACH transmission is detected on a RACH occasion that is expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit PRACH for semi-static channel access mode; for dynamic channel access mode it is assumed that RACH occasions are always scheduled within a UE-initiated COT.

- In case of UL CCA failure, The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power.

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

11.2.2.2.1.4.1 Initial conditions

This test can be run in the configurations defined in Table 11.2.2.2.1.4.1-1.

Table 11.2.2.2.1.4.1-1: Supported test configurations for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

Config	Description
11.2.2.2.1-1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: Void	

Configure the test equipment and the DUT according to the parameters in Table 11.2.2.2.1.4.1-2.

Table 11.2.2.2.1.4.1-2: Initial conditions for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.2.2.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 11.2.2.2.1.4.3.

2. For this test a single NR cell is used which is subject to CCA. The connection setup is done according to the settings in Annex C.1.3, and the downlink signal levels as per Annex C.1.2. Table 11.3.1.1.5.1-1 defines the Cell specific test parameters to be configured and strength of the transmitted signals.

11.2.2.2.1.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. When the CCA model is enabled, the following rules apply for all tests:

Rule 1: The UE shall transmit the preamble only if the UL CCA is successful.

Rule 2: The SS shall delay the transmission of Random Access Response if the DL CCA is not successful.

Rule 3: The UE shall transmit msg3 only if the UL CCA is successful.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity *NR* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 11.2.2.2.1.5-1.

3. The UE shall establish a connection setup with SS, the random access procedure within the connection setup is used in the test. The SS shall enable DL and UL CCA model according to Table 11.2.2.2.1.5-1.

4. Test 1: Correct behaviour when transmitting Random Access Preamble

   4.1. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured rsrp-ThresholdSSB.

   4.2. Measure the power and timing of the first preamble and it shall not exceed the values specified in 11.2.2.2.1.5.

5. Test 2: Correct behaviour when receiving Random Access Response

   5.1. Repeat steps 1-3.

5.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

5.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

5.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

5.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 11.2.2.2.1.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in 11.2.2.2.1.5.

6. Test 3: Correct behaviour when not receiving Random Access Response

6.1. Repeat steps 1-3.

6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

6.3. As no Random Access Response was received within the RA Response window, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 11.2.2.2.1.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in 11.2.2.2.1.5.

7. Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission

7.1. Repeat steps 1-3.

7.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

7.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

7.4. The System Simulator shall send PDCCH addressed to the Temporary C-RNTI after receiving the msg3.

7.5. The UE shall re-transmit the msg3.

7.6. The System Simulator shall check if UE re-transmit the msg3.

8. Test 5: Correct behaviour when receiving an unsuccessful UE Contention Resolution

8.1. Repeat steps 1-3.

8.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

8.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

8.4. The System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element not matching the CCCH SDU transmitted in msg3 uplink message.

8.5. As the UE Contention Resolution Identity included in the MAC control element did not match the CCCH SDU transmitted in the uplink message, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the backoff time expires.

9. Test 6: Correct behaviour when receiving a successful UE Contention Resolution

9.1. Repeat steps 1-3.

9.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

9.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

9.4. The System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in msg3 uplink message.

9.5. As the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU, the Contention Resolution is successful and the UE shall send ACK.

10. Test 7: Correct behaviour when contention Resolution timer expires

10.1. Repeat steps 1-3.

10.2. The UE shall send a preamble to the System Simulator. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble.

10.3. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit the msg3.

10.4. The System Simulator shall not send a response.

10.5. As there was no response, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power when the Contention Resolution Timer expires and then after the backoff timer expires.

11.2.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.2.2.2.1.4.3-1: Common Exception messages for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 11.2.2.2.1.4.3-2: *FrequencyInfoUL-SIB* for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-62			
Information Element	**Value/remark**	**Comment**	**Condition**
FrequencyInfoUL-SIB SEQUENCE {			
p-Max	23	23 dBm	
}			

Table 11.2.2.2.1.4.3-3: RACH-ConfigCommon for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n48		
}			
groupBconfigured SEQUENCE {			
numberOfRA-PreamblesGroupA	48		
}			
ra-ContentionResolutionTimer	sf48		
rsrp-ThresholdSSB	RSRP_51	RSRP = -105dBm	
prach-RootSequenceIndex CHOICE {			
0			
}			
msg1-SubcarrierSpacing	kHz30		
}			

Table 11.2.2.2.1.4.3-4: RACH-ConfigGeneric for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	102		
msg1-FDM	one		
zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-114		
preambleTransMax	n20		
powerRampingStep	dB2		
ra-ResponseWindow	sl20		
}			

Table 11.2.2.2.1.4.3-5: *ServingCellConfigCommonSIB* for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-169			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommonSIB ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	-5		
}			

11.2.2.2.1.5 Test requirement

Table 11.2.2.2.1.5-1 defines the primary level settings for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA.

Table 11.2.2.2.1.5-1: General test parameters for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

Parameter			Unit	Value	Comments
SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3A.1
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3A.1
DBT Window Configuration		Config 1		DBT.1	As specified in A.12.1
DL CCA model		Config 1		As specified in clause D.7.2.1	
UL CCA model		Config 1		As specified in clause D.7.2.2	
Duplex Mode for Cell 1		Config 1		TDD	
TDD Configuration		Config 1		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.2.1.
PDSCH parameters Note 3		Config 1		SR.1.1 CCA	As defined in A.1A.1.1
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/SCS	-115	
Io Note 2		Config 1	dBm/38.16MHz	-62.18	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1 under CCA	As defined in A.7.1A.1.
DL CCA probability P_{CCA_DL}	Note 4, 6			0.9375	
	Note 5, 6			0.75 / 0.75	
L_{CCA_DL} Note 7				4	
W_{CCA_DL} Note 8				Inf	
UL CCA probability P_{CCA_UL}	Note 4, 6			0.87	
	Note 5, 6			0.75	
L_{CCA_UL} Note 7				5	
W_{CCA_UL} Note 8				Inf	
Semi-static channel access config period Note 4, 6			ms	2	
Propagation Condition			-	AWGN	

Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3:	The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 6:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7:	L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.
Note 8:	A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

Test 1: Correct behaviour when transmitting Random Access Preamble

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.
- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.1.5-2.
- The transmit timing of the PRACH transmission shall be within the accuracy specified in Table 11.2.2.2.1.5-4.

Test 2: Correct behaviour when receiving Random Access Response

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.1.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 11.2.2.2.1.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 11.2.2.2.1.5-4.

Test 3: Correct behaviour when not receiving Random Access Response

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.1.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 11.2.2.2.1.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 11.2.2.2.1.5-4.

Test 4: Correct behaviour when receiving an UL grant for msg3 retransmission

- The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

Test 5: Correct behaviour when receiving an incorrect message over Temporary C-RNTI

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires.

Test 6: Correct behaviour when receiving a correct message over Temporary C-RNTI

- The UE shall send ACK if the contention resolution is successful.

Test 7: Correct behaviour when contention resolution timer expires

- The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the back off time expires if the contention resolution timer expires.

Table 11.2.2.2.1.5-2 Absolute power tolerance Test requirements for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

Conditions	Tolerance
Normal	± 19.1 dB

Table 11.2.2.2.1.5-3 Relative power tolerance Test requirements for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

Power step ΔP (Up or down) (dB)	PRACH (dB)
2 ≤ ΔP < 3	± 3.2

Table 11.2.2.2.1.5-4: T_e Timing error Test requirements for NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	30	30	$624*T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

11.2.2.2.2 NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA

11.2.2.2.2.1 Test purpose

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 11.2.2.2.0.1 and 38.133 [6] Clause 7.1.2 in an AWGN model.

11.2.2.2.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting RRM measurements and UL in shared channel access.

11.2.2.2.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 11.2.2.2.0.1.2.

The normative reference for this requirement is TS 38.133 [6] clauses A.11.2.2.2.2.

11.2.2.2.2.4 Test description

The test consists of a single cell, configured as PCell in FR1. The System Simulator shall explicitly assign a random access preamble via dedicated signalling in the downlink.

For all tests described in section 11.2.2.2.2, the following three requirements apply:

- The System Simulator shall implement the UL CCA model of D.7.2.2 for the RACH occasions where PRACH transmissions are expected. The System Simulator shall monitor the RACH occasions to detect if the UE is transmitting PRACH preambles. If a PRACH transmission is detected on a RACH occasion that is expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit PRACH for semi-static channel access mode; for dynamic channel access mode it is assumed that RACH occasions are always scheduled within a UE-initiated COT.

- In case of UL CCA failure, The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power.

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

11.2.2.2.2.4.1 Initial conditions

This test can be run in the configurations defined in Table 11.2.2.2.2.4.1-1.

Table 11.2.2.2.2.4.1-1: Supported test configurations for NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA

Config	Description
11.2.2.2.2-1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: Void	

Configure the test equipment and the DUT according to the parameters in Table 11.2.2.2.2.4.1-2.

Table 11.2.2.2.2.4.1-2: Initial conditions for NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.2.2.2.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 11.2.2.2.2.4.3.

2. For this test a single NR cell is used which is subject to CCA. The connection setup is done according to the settings in Annex C.1.3, and the downlink signal levels as per Annex C.1.2. Table 11.3.1.1.5.1-1 defines the Cell specific test parameters to be configured and strength of the transmitted signals.

11.2.2.2.2.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. When the CCA model is enabled, the following rules apply for all tests:

Rule 1: The UE shall transmit the preamble only if the UL CCA is successful.

Rule 2: The SS shall delay the transmission of Random Access Response if the DL CCA is not successful.

Rule 3: The UE shall transmit msg3 only if the UL CCA is successful.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.

2. Set the parameters according to Table 11.2.2.2.2.5-1.

3. The SS shall signal a Random Access Preamble ID via a *RRCReconfiguration* message to the UE and initiate a Non-contention based Random Access procedure according to Table 11.2.2.2.2.4.3-3 and Table 11.2.2.2.2.4.3-4. The SS shall enable DL and UL CCA model according to Table 11.2.2.2.2.5-1.

4. Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble

   4.1. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble has the Preamble Index associated with the SSB with index 0, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

4.2. Measure the power and timing of the first preamble and it shall not exceed the values specified in 11.2.2.2.2.5.

5. Test 2: Correct behaviour when receiving Random Access Response

5.1. Repeat steps 1-3.

5.2. The UE shall send preambles to the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response containing Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

5.3. As the received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power.

5.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

5.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

5.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 11.2.2.2.2.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in 11.2.2.2.2.5.

6. Test 3: Correct behaviour when not receiving Random Access Response

6.1. Repeat steps 1-3.

6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

6.3. As no Random Access Response was received within the RA Response window configured in *RACH-ConfigCommon*, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [12], and transmit with the calculated PRACH transmission power.

6.4. The System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

6.5. As the received Random Access Response contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE may stop monitoring for Random Access Response(s).

6.6. Measure the power and timing of the first preamble and it shall not exceed the values specified in 6.3.2.2.2.5. Measure the relative power and timing applied to additional preambles (last 4 preambles) and it shall not exceed the values specified in 6.3.2.2.2.5.

11.2.2.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 11.2.2.2.2.4.3-1: Common Exception messages for NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 11.2.2.2.2.4.3-2: *FrequencyInfoUL-SIB* for NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-62			
Information Element	**Value/remark**	**Comment**	**Condition**
FrequencyInfoUL-SIB SEQUENCE {			
p-Max	23	23 dBm	
}			

Table 11.2.2.2.2.4.3-3: *RACH-ConfigCommon* for NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-128			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
totalNumberOfRA-Preambles	48		
rsrp-ThresholdSSB	RSRP_51	RSRP = -105dBm	
prach-RootSequenceIndex CHOICE {			
0			
}			
msg1-SubcarrierSpacing	kHz30		
}			

Table 11.2.2.2.2.4.3-4: *CellGroupConfig* for NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex		
reconfigurationWithSync SEQUENCE {			
newUE-Identity	1		
t304	ms1000		
rach-ConfigDedicted			
uplink	RACH-ConfigDedicated for Non-Contention Based Random Access	Table 11.2.2.2.2.4.3-5	
}			
spCellConfigDedicated SEQUENCE {			
firstActiveDownlinkBWP-Id	BWP-Id		
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
srs-Config	SRS-Config		
}			
firstActiveUplinkBWP-Id	BWP-Id		
}			
}			
}			
}			

Table 11.2.2.2.2.4.3-5: *RACH-ConfigDedicated* for NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
ssb-perRACH-Occasion	oneFourth		
}			

resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF {	1 entry		
ssb[1]	0		
ra-PreambleIndex[1]	40		
}			
ra-ssb-OccasionMaskIndex	1		
}			
}			
}			
}			

Table 11.2.2.2.2.4.3-6: *RACH-ConfigGeneric* for NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	102		
msg1-FDM	one		
zeroCorrelationZoneConfig	11		
preambleReceivedTargetPower	-114		
preambleTransMax	n20		
powerRampingStep	dB2		
ra-ResponseWindow	sl20		
}			

Table 11.2.2.2.2.4.3-7: *ServingCellConfigCommon* for NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-168			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'0011 0000'B		
}			
ss-PBCH-BlockPower	-5		
}			

11.2.2.2.2.5 Test requirement

Table 11.2.2.2.2.5-1 defines the primary level settings for NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA.

Table 11.2.2.2.2.5-1: General test parameters for NR SA FR1 4-step RA type non-contention based random access for NR PCell with CCA

Parameter			Unit	Value	Comments
SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3A.1
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3A.1
DBT Window Configuration		Config 1		DBT.1	As specified in A.12.1
DL CCA model		Config 1		As specified in clause D.7.2.1	
UL CCA model		Config 1		As specified in clause D.7.2.2	
Duplex Mode for Cell 2		Config 1		TDD	
TDD Configuration		Config 1		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.2.1.

PDSCH parameters Note 3		Config 1		SR.1.1 CCA	As defined in A.1A.1.1
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/SCS	-115	
Io Note 2		Config 1	dBm/38.16MHz	-62.18	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 2 under CCA	As defined in A.7.1A.2.
DL CCA probability P_{CCA_DL}	Note 4, 6			0.9375	
	Note 5, 6			0.75 / 0.75	
L_{CCA_DL} Note 7				4	
W_{CCA_DL} Note 8				Inf	
UL CCA probability P_{CCA_UL}	Note 4, 6			0.87	
	Note 5, 6			0.75	
L_{CCA_UL} Note 7				5	
W_{CCA_UL} Note 8				Inf	
Semi-static channel access config period Note 4, 6			ms	2	
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.

Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.

Note 8:	A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

Test 1: Correct behaviour when transmitting SSB-based Random Access Preamble

- The Random Access Preamble shall be one of the Random Access Preambles associated with SSB index 0.
- The Random Access Preamble shall arrive on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0.
- The selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.
- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.2.5-2.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 11.2.2.2.2.5-4.

Test 2: Correct behaviour when receiving Random Access Response

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.2.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 11.2.2.2.2.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 11.2.2.2.2.5-4.

Test 3: Correct behaviour when not receiving Random Access Response

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.2.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 11.2.2.2.2.5-3.
- The transmit timing of all PRACH transmissions shall be within the accuracy specified in Table 11.2.2.2.2.5-4.

Table 11.2.2.2.2.5-2 Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 19.1 dB

Table 11.2.2.2.2.5-3 Relative power tolerance Test requirements

Power step ΔP (Up or down) (dB)	PRACH (dB)
2 ≤ ΔP < 3	± 3.2

Table 11.2.2.2.2.5-4: T_e Timing error Test requirements

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	30	30	624*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

11.2.2.2.3 NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

11.2.2.2.3.1 Test purpose

The purpose of this test is to verify that the behaviour of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 11.2.2.2.0.2 and 38.133 [6] Clause 7.1.2 in an AWGN model.

11.2.2.2.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U, supporting RRM measurements and UL in shared channel access, and supporting twoStepRACH-r16.

11.2.2.2.3.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 11.2.2.2.0.2.1.

The normative reference for this requirement is TS 38.133 [6] clauses A.11.2.2.2.3.

11.2.2.2.3.4 Test description

The test consists of a single cell, configured as PCell in an unlicensed FR1 carrier. The System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

For all tests described in section 11.2.2.2.3, the following three requirements apply:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.

- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [12], and transmit with the calculated MsgA transmission power in case of UL CCA failure.

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

11.2.2.2.3.4.1 Initial conditions

This test can be run in the configurations defined in Table 11.2.2.2.3.4.1-1.

Table 11.2.2.2.3.4.1-1: Supported test configurations for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

Config	Description
11.2.2.2.3-1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: Void	

Configure the test equipment and the DUT according to the parameters in Table 11.2.2.2.3.4.1-2.

Table 11.2.2.2.3.4.1-2: Initial conditions for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 11.2.2.2.3.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 11.2.2.2.3.4.3.

2. For this test a single NR cell is used which is subject to CCA. The connection setup is done according to the settings in Annex C.1.3, and the downlink signal levels as per Annex C.1.2. Table 11.3.1.1.5.1-1 defines the Cell specific test parameters to be configured and strength of the transmitted signals.

11.2.2.2.3.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. When the CCA model is enabled, the following rules apply for all tests:

Rule 1: The UE shall transmit the MsgA only if the UL CCA is successful.

Rule 2: The SS shall delay the transmission of MsgB if the DL CCA is not successful.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity *NR* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 11.2.2.2.3.5-1.

3. The UE shall establish a connection setup with SS, the random access procedure within the connection setup is used in the test. The SS shall enable DL and UL CCA model according to Table 11.2.2.2.3.5-1.

4. Test 1: Correct behaviour when transmitting MsgA:

   4.1. The UE shall send a MsgA to the System Simulator. The System Simulator shall check that the MsgA preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SSB_RP above the configured *msgA-RSRP-ThresholdSSB.*

   4.2 Measure the power and timing of the first MsgA preamble and it shall not exceed the values specified in 11.2.2.2.3.5.

5. Test 2: Correct behaviour when receiving MsgB:

   5.1. Repeat steps 1-3.

   5.2. The UE shall send MsgA preambles to the System Simulator. In response to the first 4 MsgA preambles, the System Simulator shall transmit a MsgB containing identifiers that do not match the transmitted Random Access Preamble.

   5.3. As the received MsgB contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

   5.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   5.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

   5.6. Measure the power and timing of the first MsgA preamble and it shall not exceed the values specified in clause 11.2.2.2.3.5. Measure the relative power and timing applied to additional MsgA preambles (last 4 preambles) and they shall not exceed the values specified in clause 11.2.2.2.3.5.

6. Test 3: Correct behaviour when not receiving MsgB:

6.1. Repeat steps 1-3.

6.2. The UE shall send preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

6.3. As no MsgB was received within the RA Response window, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

6.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

6.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

6.6 Measure the power and timing of the first MsgA preamble and it shall not exceed the values specified in clause 11.2.2.2.3.5. Measure the relative power and timing applied to additional MsgA preambles (last 4 preambles) and they shall not exceed the values specified in clause 11.2.2.2.3.5.

11.2.2.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3.1 with the following exceptions:

Table 11.2.2.2.3.4.3-1: Common Exception messages for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-81A

Table 11.2.2.2.3.4.3-2: *RACH-ConfigCommonTwoStepRA* for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14],Table 4.6.3-128A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommonTwoStepRA-r16 ::= SEQUENCE {			
rach-ConfigGenericTwoStepRA-r16	RACH-ConfigGenericTwoStepRA		
msgA-TotalNumberOfRA-Preambles-r16	48		
msgA-SSB-PerRACH-OccasionAndCB-PreamblesPerSSB-r16 CHOICE {			
oneFourth	n48		
}			
msgA-PRACH-RootSequenceIndex-r16 CHOICE {}	0		
msgA-TransMax-r16	n20		
msgA-SubcarrierSpacing-r16	Same as UL carrier SCS		
ra-ContentionResolutionTimer-r16	sf48		
}			

Table 11.2.2.2.3.4.3-3: *RACH-ConfigGenericTwoStepRA* for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14],Table 4.6.3-130A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGenericTwoStepRA-r16 ::= SEQUENCE {			
msgA-PRACH-ConfigurationIndex-r16	102		
msgA-RO-FDM-r16	One		

msgA-ZeroCorrelationZoneConfig-r16	11		
msgA-PreamblePowerRampingStep-r16	dB2		
msgA-PreambleReceivedTargetPower-r16	-114		
msgB-ResponseWindow-r16	sl20		
preambleTransMax-r16	n20		
}			

Table 11.2.2.2.3.4.3-4: *ServingCellConfigCommonSIB* for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-169			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommonSIB ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'1100 0000'B		
}			
ss-PBCH-BlockPower	-5		
}			

11.2.2.2.3.5 Test requirement

Table 11.2.2.2.3.5-1 defines the primary level settings for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA.

Table 11.2.2.2.3.5-1: General test parameters for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

Parameter			Unit	Value	Comments
SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3A.1
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3A.1
DBT Window Configuration		Config 1		DBT.1	As specified in A.12.1
DL CCA model		Config 1		As specified in clause D.7.2.1	
UL CCA model		Config 1		As specified in clause D.7.2.2	
Duplex Mode for Cell 2		Config 1		TDD	
TDD Configuration		Config 2		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.2.1
PDSCH parameters Note 3		Config 1		SR.1.1 CCA	As defined in A.1A.1.1
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	

SS-RSRP		dBm/SCS	-115	
Io Note 2	Config 1	dBm/38.16MHz	-62.18	For symbols without SSB index 1
ss-PBCH-BlockPower		dBm/SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,f,c}$)		dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration			FR1 MsgA configuration 1 under CCA	As defined in A.7A.1A.1.
msgA-RSRP-ThresholdSSB		dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
DL CCA probability	Note 4, 6		0.9375	
P_{CCA_DL}	Note 5, 6		0.75 / 0.75	
L_{CCA_DL} Note 7			4	
W_{CCA_DL} Note 8			Inf	
UL CCA probability	Note 4, 6		0.87	
P_{CCA_UL}	Note 5, 6		0.75	
L_{CCA_UL} Note 7			5	
W_{CCA_UL} Note 8			Inf	
Semi-static channel access config period Note 4, 6		ms	2	
Propagation Condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.

Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.

Note 8: A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

Test 1: Correct behaviour when transmitting MsgA:

- The MsgA shall be one of the Random Access Preambles associated with SSB index 0.
- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.3.5-2.
- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2))dBm and with accuracy specified in Table 11.2.2.2.3.5-2A.

Test 2: Correct behaviour when receiving MsgB:

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.3.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 11.2.2.2.3.5-3.
- The transmit timing of all MsgA PRACH transmissions shall be within the accuracy specified in Table 11.2.2.2.3.5-4.
- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2))dBm and with accuracy specified in Table 11.2.2.2.3.5-2A.

Test 3: Correct behaviour when not receiving MsgB:

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.3.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 11.2.2.2.3.5-3.
- The transmit timing of all MsgA PRACH transmissions shall be within the accuracy specified in Table 11.2.2.2.3.5-4.
- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2))dBm and with accuracy specified in Table 11.2.2.2.3.5-2A.

Table 11.2.2.2.3.5-2: MsgA PRACH Absolute power tolerance Test requirements for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

Conditions	Tolerance
Normal	± 19.1 dB

Table 11.2.2.2.3.5-2A: MsgA PUSCH Absolute power tolerance Test requirements for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

Conditions	Tolerance
Normal	± 19.1 dB

Table 11.2.2.2.3.5-3: Relative power tolerance Test requirements for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

Power step ΔP (Up or down) (dB)	MsgA PRACH (dB)
$2 \leq \Delta P < 3$	± 3.2 dB

Table 11.2.2.2.3.5-4: T_e Timing error Test requirements for NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	30	30	$624*T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

11.2.2.2.4 NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

11.2.2.2.4.1 Test purpose

The purpose of this test is to verify that the behaviour of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 11.2.2.2.0.2 and 38.133 [6] Clause 7.1.2 in an AWGN model.

11.2.2.2.4.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U, supporting RRM measurements and UL in shared channel access, and supporting twoStepRACH-r16.

11.2.2.2.4.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 11.2.2.2.0.2.2.

The normative reference for this requirement is TS 38.133 [6] clauses A.11.2.2.2.4.

11.2.2.2.4.4 Test description

The test consists of a single cell, configured as PCell in an unlicensed FR1 carrier. The System Simulator shall not explicitly assign a random access preamble via dedicated signalling in the downlink.

For all tests described in section 11.2.2.2.4, the following three requirements apply:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.

- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [12], and transmit with the calculated MsgA transmission power in case of UL CCA failure.

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

11.2.2.2.4.4.1 Initial conditions

This test can be run in the configurations defined in Table 11.2.2.2.4.4.1-1.

Table 11.2.2.2.4.4.1-1: Supported test configurations for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Config	Description
11.2.2.2.4-1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: Void	

Configure the test equipment and the DUT according to the parameters in Table 11.2.2.2.4.4.1-2.

Table 11.2.2.2.4.4.1-2: Initial conditions for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.2.2.4.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 11.2.2.2.4.4.3.

2. For this test a single NR cell is used which is subject to CCA. The connection setup is done according to the settings in Annex C.1.3, and the downlink signal levels as per Annex C.1.2. Table 11.3.1.1.5.1-1 defines the Cell specific test parameters to be configured and strength of the transmitted signals.

11.2.2.2.4.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. When the CCA model is enabled, the following rules apply for all tests:

Rule 1: The UE shall transmit the MsgA only if the UL CCA is successful.

Rule 2: The SS shall delay the transmission of MsgB if the DL CCA is not successful.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.

2. Set the parameters according to Table 11.2.2.2.4.5-1.

3. The SS shall signal a Random Access Preamble ID via a *RRCReconfiguration* message to the UE and initiate a Non-contention based Random Access procedure according to Table 11.2.2.2.4.4.3-3 and Table 11.2.2.2.4.4.3-4. The SS shall enable DL and UL CCA model according to Table 11.2.2.2.4.5-1.

4. Test 1: Correct behaviour when transmitting MsgA:

   4.1. The UE shall send a MsgA to the System Simulator. The System Simulator shall check that the MsgA preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, that it arrives on a PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and that the selected PRACH occasion belongs to the PRACH occasions permitted by the restrictions given by the *msgA-SSB-SharedRO-MaskIndex*.

   4.2 Measure the power and timing of the first MsgA preamble and it shall not exceed the values specified in 11.2.2.2.4.5.

5. Test 2: Correct behaviour when receiving MsgB:

   5.1. Repeat steps 1-3.

   5.2. The UE shall send MsgA preambles to the System Simulator. In response to the first 4 MsgA preambles, the System Simulator shall transmit a MsgB containing identifiers that do not match the transmitted Random Access Preamble.

   5.3. As the received MsgB contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

   5.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   5.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

   5.6. Measure the power and timing of the first MsgA preamble and it shall not exceed the values specified in clause 11.2.2.2.4.5. Measure the relative power and timing applied to additional MsgA preambles (last 4 preambles) and they shall not exceed the values specified in clause 11.2.2.2.4.5.

6. Test 3: Correct behaviour when not receiving MsgB:

   6.1. Repeat steps 1-3.

   6.2. The UE shall send MsgA preambles to the System Simulator. The System Simulator shall not respond to the first 4 preambles.

   6.3. As no MsgB was received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA*, the UE shall perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [12], and transmit with the calculated MsgA PRACH transmission power when the backoff time expires.

   6.4. The System Simulator shall transmit a MsgB containing a Random Access Preamble identifier matching the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator.

   6.5. As the received MsgB contains a Random Access Preamble identifier that matches the transmitted Random Access Preamble, the UE shall transmit an ACK and stop monitoring for MsgB.

6.6 Measure the power and timing of the first MsgA preamble and it shall not exceed the values specified in clause 11.2.2.2.4.5. Measure the relative power and timing applied to additional MsgA preambles (last 4 preambles) and they shall not exceed the values specified in clause 11.2.2.2.4.5.

11.2.2.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3.1 with the following exceptions:

Table 11.2.2.2.4.4.3-1: Common Exception messages for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access
Common exceptions to the contents of TS 38.508-1 [14]	Table 4.6.3-81A

Table 11.2.2.2.4.4.3-2: *RACH-ConfigCommonTwoStepRA* for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14],Table 4.6.3-128A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommonTwoStepRA-r16 ::= SEQUENCE {			
rach-ConfigGenericTwoStepRA-r16	RACH-ConfigGenericTwoStepRA		
msgA-TotalNumberOfRA-Preambles-r16	48		
msgA-PRACH-RootSequenceIndex-r16 CHOICE {}	0		
msgA-TransMax-r16	n20		
msgA-SubcarrierSpacing-r16	Same as UL carrier SCS		
ra-ContentionResolutionTimer-r16	sf48		
}			

Table 11.2.2.2.4.4.3-3: *CellGroupConfig* for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex		
reconfigurationWithSync SEQUENCE {			
newUE-Identity	1		
t304	ms1000		
rach-ConfigDedicted			
uplink	RACH-ConfigDedicated for Non-Contention Based Random Access	Table 11.2.2.2.4.4.3-4	
}			
spCellConfigDedicated SEQUENCE {			
firstActiveDownlinkBWP-Id	BWP-Id		
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
srs-Config	SRS-Config		
}			
firstActiveUplinkBWP-Id	BWP-Id		
}			
}			
}			

}			

Table 11.2.2.2.4.4.3-4: *RACH-ConfigDedicated* for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14],Table 4.6.3-129			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigDedicated ::= SEQUENCE {			
cfra SEQUENCE {			
occasions SEQUENCE {			
rach-ConfigGeneric	RACH-ConfigGeneric		
ssb-perRACH-Occasion	oneFourth		
}			
resources CHOICE {			
ssb SEQUENCE {			
ssb-ResourceList SEQUENCE (SIZE(1..maxRA-SSB-Resources)) OF CFRA-SSB-Resource {	1 entry		
CFRA-SSB-Resource[1] SEQUENCE {		entry 1	
ssb	SSB-Index		
ra-PreambleIndex	40		
}			
}			
ra-ssb-OccasionMaskIndex	1		
}			
}			
}			
cfra-TwoStep-r16 SEQUENCE {			2-step RA
occasionsTwoStepRA-r16 SEQUENCE {			
rach-ConfigGenericTwoStepRA-r16	RACH-ConfigGenericTwoStepRA		
ssb-PerRACH-OccasionTwoStepRA-r16	oneFourth		
}			
msgA-CFRA-PUSCH-r16 SEQUENCE {			
msgA-MCS-r16	1		
nrofSlotsMsgA-PUSCH-r16	1		
nrofMsgA-PO-PerSlot-r16	one		
msgA-PUSCH-TimeDomainOffset-r16	1		
nrofPRBs-PerMsgA-PO-r16	2		
nrofMsgA-PO-FDM-r16	one		
msgA-DMRS-Config-r16 SEQUENCE {			
msgA-DMRS-AdditionalPosition-r16	Pos1		
msgA-PUSCH-NrofPorts-r16	1		
}			
msgA-Alpha-r16	alpha1		
}			
resourcesTwoStep-r16 SEQUENCE {			
}			
}			

Table 11.2.2.2.4.4.3-5: *RACH-ConfigGenericTwoStepRA* for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14],Table 4.6.3-130A			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGenericTwoStepRA-r16 ::= SEQUENCE {			
msgA-PRACH-ConfigurationIndex-r16	102		
msgA-RO-FDM-r16	One		
msgA-ZeroCorrelationZoneConfig-r16	11		
msgA-PreamblePowerRampingStep-r16	dB2		
msgA-PreambleReceivedTargetPower-r16	-114		
msgB-ResponseWindow-r16	sl20		

preambleTransMax-r16	n20		
}			

Table 11.2.2.2.4.4.3-6: *ServingCellConfigCommon* for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Derivation Path: TS 38.508-1 [14], table 4.6.3-168			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'0011 0000'B		
}			
ss-PBCH-BlockPower	-5		
}			

11.2.2.2.4.5 Test requirement

Table 11.2.2.2.4.5-1 defines the primary level settings for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA.

Table 11.2.2.2.4.5-1: General test parameters for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Parameter			Unit	Value	Comments
SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3A.1
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3A.1
DBT Window Configuration		Config 1		DBT.1	As specified in A.12.1
DL CCA model		Config 1		As specified in clause D.7.2.1	
UL CCA model		Config 1		As specified in clause D.7.2.2	
Duplex Mode for Cell 1		Config 1		TDD	
TDD Configuration		Config 1		TDDConf.1.1 CCA	
OCNG Pattern Note 1				OCNG pattern 1	As defined in A.2.1
PDSCH parameters Note 3		Config 1		SR.1.1 CCA	As defined in A.1A.1.1
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
msgA-*RSRP-ThresholdSSB*			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured msgA-*RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured msgA-*RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/SCS	-115	
Io Note 2		Config 1	dBm/38.16MHz	-62.18	For symbols without SSB index 1

ss-PBCH-BlockPower		dBm/SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)		dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration			FR1 MsgA configuration 2 under CCA	As defined in A.7A.1A.2.
DL CCA probability	Note 4, 6		0.9375	
P_{CCA_DL}	Note 5, 6		0.75 / 0.75	
L_{CCA_DL} Note 7			4	
W_{CCA_DL} Note 8			Inf	
UL CCA probability	Note 4, 6		0.87	
P_{CCA_UL}	Note 5, 6		0.75	
L_{CCA_UL} Note 7			5	
W_{CCA_UL} Note 8			Inf	
Semi-static channel access config period Note 4, 6		ms	2	
Propagation Condition		-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.

Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}.

Note 8: A window W_{CCA_DL}=W_{CCA_UL}=Inf is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

Test 1: Correct behaviour when transmitting MsgA:

- The MsgA shall be one of the Random Access Preambles associated with SSB index 0.
- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.4.5-2.
- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2))dBm and with accuracy specified in Table 11.2.2.2.4.5-2A.

Test 2: Correct behaviour when receiving MsgB:

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.4.5-2.
- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 11.2.2.2.4.5-3.
- The transmit timing of all MsgA PRACH transmissions shall be within the accuracy specified in Table 11.2.2.2.4.5-4.
- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2))dBm and with accuracy specified in Table 11.2.2.2.4.5-2A.

Test 3: Correct behaviour when not receiving MsgB:

- The power of the first preamble shall be -16 dBm within the accuracy specified in Table 11.2.2.2.4.5-2.

- The relative power for preamble ramping step shall be 2 dB within the accuracy specified in Table 11.2.2.2.4.5-3.

- The transmit timing of all MsgA PRACH transmissions shall be within the accuracy specified in Table 11.2.2.2.4.5-4.

- The power of the first MsgA PUSCH transmission shall be 9.6 dBm (= 0.6+3(μ=1+2))dBm and with accuracy specified in Table 11.2.2.2.4.5-2A.

Table 11.2.2.2.4.5-2: MsgA PRACH Absolute power tolerance Test requirements for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Conditions	Tolerance
Normal	± 19.1 dB

Table 11.2.2.2.4.5-2A: MsgA PUSCH Absolute power tolerance Test requirements for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Conditions	Tolerance
Normal	± 19.1 dB

Table 11.2.2.2.4.5-3: Relative power tolerance Test requirements for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Power step ΔP (Up or down) (dB)	MsgA PRACH (dB)
$2 \leq \Delta P < 3$	± 3.2 dB

Table 11.2.2.2.4.5-4: T_e Timing error Test requirements for NR SA FR1 2-step RA type non-contention based random access for NR PCell with CCA

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals s(KHz)	T_e
1	30	30	$624*T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

11.2.2.3 RRC connection release with redirection

11.2.2.3.0 Minimum conformance requirements

The UE shall be capable of performing the RRC connection release with redirection to the target NR cell subject to CCA within $T_{connection_release_redirect_NR_CCA}$.

The time delay ($T_{connection_release_redirect_NR_CCA}$) is the time between the end of the last slot containing the RRC command, "*RRCRelease*" (TS 38.331 [2]) on the NR PDSCH and the time the UE starts to send random access to the target NR cell. The time delay ($T_{connection_release_redirect_NR_CCA}$) shall be less than:

$$T_{connection_release_redirect_NR_CCA} = T_{RRC_procedure_delay} + T_{identify\text{-}NR_CCA} + T_{SI\text{-}NR_CCA} + T_{RACH_CCA}$$

The target NR cell shall be considered detectable when for each relevant SSB, the side conditions should be met that,

- the conditions of SSB_RP and SSB Ês/Iot as defined in Annex B.2.5 of TS 38.133 for a corresponding NR Band are fulfilled.

- $T_{RRC_procedure_delay}$: It is the RRC procedure delay for processing the received message "*RRCRelease*" as defined in clause 6.2.2 of TS 38.331 [2].

- $T_{identify\text{-}NR_CCA}$: It is the time to identify the target NR cell and is defined as:

- $T_{identify-NR_CCA} = T_{PSS/SSS-sync} + T_{meas}$; $T_{PSS/SSS-sync}$ is the cell search time and T_{meas} is the measurement time due to cell selection criteria evaluation.

- For FR1 target NR cell: $T_{identify-NR_CCA}$ = MAX (680 ms, $(L_1+11) \times T_{rs}$);

  - where L_1 is the number of SMTC occasions not available at the UE due to DL CCA failures and L_1' is the number of SMTC occasion groups not available at the UE due to DL CCA failures. An SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. N is equal to 12. If $L_1 > L_{1,max}$ or $L_1' > L_{1,max}$ then the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1]; where $L_{1,max}$ is defined in Table 11.2.2.3.0-1.

- T_{SI-NR_CCA}: It is the time required for acquiring all the relevant system information of the target NR cell. This time depends upon whether the UE is provided with the relevant system information of the target NR cell or not by the old NR cell before the RRC connection is released.

- $T_{RACH_CCA:}$ It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell:

- $T_{RACH_CCA} = (1+L_2) \times T_{SSB,RO} + 10$ ms; where:

  - L_2 is the consecutive number of SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failures. $L_2 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. $L_3 = 0$ if *ra-ChannelAccess-r17* is not configured in FR2-2.

  - $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in the table 8.1-1 of TS 38.213 [3].

  - The value of L2 is limited by *PREAMBLE_TRANSMISSION_COUNTER*, which is increased when PRACH occasion is unavailable for PRACH transmission due to UL CCA failure as specified in TS 38.321 [7]. The UE behaviour when *PREAMBLE_TRANSMISSION_COUNTER* reaches the *preambleTransMax* is specified in TS 38.321 [7].

- T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the redirection command, otherwise T_{rs} is the SMTC periodicity configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing configured for the RRC connection release with redirection. If the UE is not provided with SMTC configuration or measurement object for the frequency which is also configured for the RRC connection release with redirection then:

- the requirement in this clause is applied with T_{rs} = 20 ms if the SSB transmission periodicity is not larger than 20 ms;

- otherwise, there is no requirement if the SSB transmission periodicity is larger than 20ms.

Table 11.2.2.3.0-1: Maximum allowed number of missed SMTC occasions during cell identification

SMTC periodicity (T_{rs}) [ms]	Maximum allowed number of missed SMTC occasions ($L_{1,max}$)
$T_{rs} \leq 40$	8
$T_{rs} > 40$	4

The normative reference for this requirement is TS 38.133 [6] clause 6.2.3.2.3.

11.2.2.3.1 NR SA FR1 Redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA

11.2.2.3.1.1 Test purpose

The purpose of this test is to verify that UE shall perform RRC connection release with redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA within limits.

11.2.2.3.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U.

11.2.2.3.1.3 Minimum conformance requirement

The minimum requirements are specified in clause 11.2.2.3.0

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.2.3.1.

11.2.2.3.1.4 Test description

11.2.2.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.2.2.3.1.4.1-1.

Table 11.2.2.3.1.4.1-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.2.2.3.1.4.1-2.

Table 11.2.2.3.1.4.1-2: NR SA FR1 Redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.2.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 11.2.2.3.1.4.3.
2. There is one NR carrier and two NR cells specified in the test. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.
3. The test parameters are given in Table 11.2.2.3.1.4.1-3.

Table 11.2.2.3.1.4.1-3: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier under CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.26.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.26.2.2	
	Semi-static channel access Note 2,3			
T1		s	5	
T2		s	≥ $T_{connection_release_redirect_NR_CCA}$	$T_{connection_release_redirect_NR_CCA}$ is defined in clause 6.2.3.2.3

NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

11.2.2.3.1.4.2 Test Procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The "*RRCRelease*" message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the beginning of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell
2. Set the parameters to T1 and enable the CCA model according to Table 11.2.2.3.1.5-1. T1 starts.
3. SS shall transmit an *RRCRelease* during period T1.
4. The SS shall switch the power setting from T1 to T2 as specified in Table 11.2.2.3.1.5-1. When the last TTI containing the *RRCRelease* message is sent to UE, T2 starts.
5. If the UE transmits the PRACH to Cell 2 in less than $T_{connection_release_redirect_NR_CCA}$ ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
6. After T2 expires, the UE shall be switched off. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell and Cell 2 shall be powered OFF.
7. The SS shall set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
8. Repeat steps 2-7 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.2.3.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.2.2.3.1.4.3-1: Common exceptions for NR SA FR1 Redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 11.2.2.3.1.4.3-2: RRCRelease for NR RRC redirection

Derivation Path: TS 38.508-1 [14], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCRelease ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcRelease SEQUENCE {			
redirectedCarrierInfo CHOICE {			
nr SEQUENCE {			
carrierFreq	ARFCN-ValueNR	Frequency of Cell 2	
ssbSubcarrierSpacing	kHz30		
smtc SEQUENCE {			
duration	sf1		SMTC.1

}			
}			
}			
}			
}			
}			

11.2.2.3.1.5 Test Requirement

Table 11.2.2.3.1.5-1 defines the cell-specific test parameters for redirection from NR to NR test case.

Table 11.2.2.3.1.5-1: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
P_{CCA_DL} for dynamic channel access Note 4,6		-	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 5,6		-	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
P_{CCA_UL} for dynamic channel access Note 4,6		-	1		1	
P_{CCA_UL} for semi-static channel access Note 5,6		-	1		1	
L_{CCA_DL} Note 7			N/A		8	
W_{CCA_DL} Note 7		ms	N/A		$T_{identify\text{-}NR_CCA}$	
TDD configuration	Config 1		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1		40: $N_{RB,c}$ = 106			
BWP BW	Config 1		40: $N_{RB,c}$ = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference	Config 1		SR.1.1 CCA			
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA			
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA			
TRS configuration	Config 1		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
DBT configuration			DBT.1			
SSB configuration for semi-static channel access Note 4, 6	Config 1		SSB.1 CCA			
SSB configuration for dynamic channel access Note 5, 6	Config 1		SSB.2 CCA			
ssb-PositionQCL	Config 1		[1]			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	30 kHz			
PRACH configuration			FR1 PRACH configuration 1 under CCA			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						

EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1	dBm/SCS	-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4
Io Note3	Config 1	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-58.49
Propagation condition		-	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.
Note 7: As defined in clause 6.2.3.2.3 for $T_{rs} \leq 40$ ms.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{connection_release_redirect_NR_CCA}$ ms from the beginning of time period T2, where $T_{connection_release_redirect_NR_CCA}$ is defined in clause 11.2.2.3.0.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR_CCA} = T_{RRC_procedure_delay} + T_{identify\text{-}NR_CCA} + T_{SI\text{-}NR_CCA} + T_{RACH_CCA},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}NR_CCA}$ = 680 ms in the test.

$T_{SI\text{-}NR_CCA}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH_CCA} = 20 ms in the test.

The total delay, $T_{connection_release_redirect_NR_CCA}$, shall be less than 2090 ms, allowing 2.2 s in the test case.

11.2.2.3.2 NR SA FR1 Redirection from NR FR1 carrier without CCA to NR FR1 carrier under CCA

11.2.2.3.2.1 Test purpose

The purpose of this test is to verify that UE shall perform RRC connection release with redirection from NR FR1 carrier without CCA to NR FR1 carrier under CCA within limits.

11.2.2.3.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U.

11.2.2.3.2.3 Minimum conformance requirement

The minimum requirements are specified in clause 11.2.2.3.0

The normative reference for this requirement is TS 38.133 [6] clause A.11.2.2.3.2.

11.2.2.3.2.4 Test description

11.2.2.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.2.2.3.2.4.1-1.

Table 11.2.2.3.2.4.1-1: Redirection from NR to NR test configurations

Configuration	Source cell without CCA	Target cell with CCA
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations		

Configure the test equipment and the DUT according to the parameters in Table 11.2.2.3.2.4.1-2.

Table 11.2.2.3.2.4.1-2: NR SA FR1 Redirection from NR FR1 carrier without CCA to NR FR1 carrier under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 11.2.2.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 11.2.2.3.2.4.3
2. There is one NR carrier and two NR cells specified in the test. Cell 1 and Cell 2 are configured according to Annex C.1.1 and C.1.2.3. The test parameters are given in Table 11.2.2.3.2.4.1-3.

Table 11.2.2.3.2.4.1-3: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier without CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.26.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.26.2.2	
	Semi-static channel access Note 2,3			
T1		s	5	
T2		s	≥ $T_{connection_release_redirect_NR_CCA}$	$T_{connection_release_redirect_NR_CCA}$ is defined in clause 6.2.3.2.3
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

11.2.2.3.2.4.2 Test Procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The "*RRCRelease*" message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the beginning of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters to T1 and enable the CCA model according to Table 11.2.2.3.1.5-1. T1 starts.
3. SS shall transmit an *RRCRelease* during period T1.
4. The SS shall switch the power setting from T1 to T2 as specified in Table 11.2.2.3.1.5-1. When the last TTI containing the *RRCRelease* message is sent to UE, T2 starts.
5. If the UE transmits the PRACH to Cell 2 in less than $T_{connection_release_redirect_NR_CCA}$ ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
6. After T2 expires, the UE shall be switched off. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell and Cell 2 shall be powered OFF.
7. The SS shall set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
8. Repeat steps 2-7 until the confidence level according to Annex G clause G.2.7 is achieved.

11.2.2.3.2.4.3 Message Contents

Same as 11.2.2.3.1.4.3 with the following exceptions:

Table 11.2.2.3.2.4.3-1: RRCRelease for NR RRC redirection

Derivation Path: TS 38.508-1 [14], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCRelease ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcRelease SEQUENCE {			
redirectedCarrierInfo CHOICE {			
nr SEQUENCE {			
carrierFreq	ARFCN-ValueNR	Frequency of Cell 2	
ssbSubcarrierSpacing	kHz30		
smtc SEQUENCE {	sf1		SMTC.1
duration	sf5		SMTC.2
}			
}			
}			
}			
}			
}			

11.2.2.3.2.5 Test Requirement

Table 11.2.2.3.2.5-1 defines the cell-specific test parameters for redirection from NR to NR test case.

Table 11.2.2.3.2.5-1: Cell specific test parameters for Redirection from NR to NR test case

Parameter			Unit	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number				1		2	
P_{CCA_DL} for dynamic channel access Note 4,6				N/A		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75
P_{CCA_DL} for semi-static channel access Note 5,6				N/A		P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375
P_{CCA_UL} for dynamic channel access Note 4,6				N/A		1	1
P_{CCA_UL} for semi-static channel access Note 5,6				N/A		1	1
L_{CCA_DL} Note 7				N/A		8	
W_{CCA_DL} Note 7			ms	N/A		$T_{identify\text{-}NR_CCA}$	
Duplex mode		Config 1		FDD		TDD	
		Config 2,3		TDD			
TDD configuration		Config 1		Not Applicable		TDDConf.1.1 CCA	
		Config 2		TDDConf.1.1		TDDConf.1.1 CCA	
		Config 3		TDDConf.2.1		TDDConf.1.1 CCA	
$BW_{channel}$		Config 1	MHz	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
		Config 2		10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
		Config 3		40: $N_{RB,c}$ = 106			
BWP BW		Config 1	MHz	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
		Config 2		10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106	
		Config 3		40: $N_{RB,c}$ = 106			
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD		SR.1.1 CCA	
		Config 2		SR.1.1 TDD		SR.1.1 CCA	
		Config 3		SR2.1 TDD		SR.1.1 CCA	
RMSI CORESET RMC configuration		Config 1		CR.1.1 FDD		CR.1.1 CCA	
		Config 2		CR.1.1 TDD		CR.1.1 CCA	
		Config 3		CR.2.1 TDD		CR.1.1 CCA	
Dedicated CORESET RMC configuration		Config 1		CCR.1.1 FDD		CCR.1.1 CCA	
		Config 2		CCR.1.1 TDD		CCR.1.1 CCA	
		Config 3		CCR.2.1 TDD		CCR.1.1 CCA	
OCNG Patterns				OCNG pattern 1			
SSB Configuration	Semi-static channel acces	Config 1,2		SSB.1 FR1		SSB.1 CCA	
	Dymamic channel acces	Config 3		SSB.2 FR1		SSB.2 CCA	
	Semi-static channel acces	Config 1,2		SSB.1 FR1		SSB.1 CCA	
	Dymamic channel acces	Config 3		SSB.2 FR1		SSB.2 CCA	
SMTC configuration		Config 1,2		SMTC.1 FR1		SMTC.2 FR1	
		Config 3		SMTC.2 FR1			
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz		30 kHz	
		Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing		Config 1,2	kHz	15 kHz		30 kHz	
		Config 3		30 kHz			
PRACH configuration				FR1 PRACH configuration 1 under CCA in Table A.3.8A.2.1-1			
BWP configuration		Initial DL BWP		DLBWP.0.1			
		Dedicated DL BWP		DLBWP.1.1			
		Initial UL BWP		ULBWP.0.1			
		Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS			dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							

EPRE ratio of OCNG DMRS to SSS (Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-95	
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4
Io Note3	Config 1,2	dBm/9.36 MHz	-64.59	-64.59	N/A	N/A
		dBm/38.16 MHz	N/A	N/A	-63.94	-58.49
	Config 3	dBm/38.16 MHz	-58.49	-58.49	-63.94	-58.49
Propagation condition		-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only. Note 7: As defined in clause 6.2.3.2.3 for $T_{rs} \leq 40$ ms.						

The UE shall start to transmit the PRACH to Cell 2 less than $T_{connection_release_redirect_NR_CCA}$ ms from the beginning of time period T2, where $T_{connection_release_redirect_NR_CCA}$ is defined in clause 11.2.2.3.0.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR_CCA} = T_{RRC_procedure_delay} + T_{identify\text{-}NR_CCA} + T_{SI\text{-}NR_CCA} + T_{RACH_CCA},$$

where:

$T_{RRC_procedure_delay}$ = 110 ms in the test.

$T_{identify\text{-}NR_CCA}$ = 680 ms in the test.

$T_{SI\text{-}NR_CCA}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH_CCA} = 20 ms in the test.

The total delay, $T_{connection_release_redirect_NR_CCA}$, shall be less than 2090 ms, allowing 2.2 s in the test case. .

11.3 Timing

11.3.1 UE transmit timing

11.3.1.0 Minimum conformance requirements

11.3.1.0.1 Minimum conformance requirements for UE transmit timing accuracy

Same as section 4.4.1.0.1 with the following additional considerations:

The term reference cell on a carrier frequency subject to CCA is not available at the UE refers to when at least one SSB is configured by gNB, but the first two successive candidate SSB positions for the same SSB index within the discovery

burst transmission window are not available during at least one discovery burst transmission window, at the UE due to DL CCA failures at gNB during the last 1280 ms; otherwise the reference cell on the carrier frequency subject to CCA is considered as available at the UE.

If the UE uses a reference cell on a carrier frequency subject to CCA for deriving the UE transmit timing, then the UE shall meet all the transmit timing requirements defined in TS 38.133 [6] clause 7.1.2 provided that the reference cell is available at the UE. If the reference cell is not available at the UE on a carrier frequency subject to CCA, then the UE is allowed to transmit in the uplink provided that the UE meets all the transmit timing requirements defined in TS 38.133 [6] clause 7.1.2; otherwise the UE shall not transmit any uplink signal.

If a reference cell on a carrier frequency belonging to the PTAG, which is subject to CCA, is not available at the UE then the UE is allowed to use any of available activated SCell(s) at the UE in PTAG as a new reference cell. If the SCell used as reference cell is deactivated, or becomes not available, the UE is allowed to use another active serving cell in PTAG as new reference cell.

If a reference cell on a carrier frequency belonging to the STAG, which is subject to CCA is not available at the UE then the UE is allowed to use any of available activated SCell(s) at the UE in STAG as a new reference cell.

The normative reference for this requirement is TS.38.133 [6] clause 7.1.2.

11.3.1.1 NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

11.3.1.1.1 Test purpose

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb when PSCell is subject to DL CCA and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in TS 38.133 [6] clause 7.1.2.

11.3.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone NR-U with a UL shared spectrum NR carrier.

11.3.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.3.1.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.11.3.1.1.

11.3.1.1.4 Test Description

11.3.1.1.4.1 Initial Conditions

This test can be run in one of the configurations defined in Table 11.3.1.1.4.1-1.

Table 11.3.1.1.4.1-1: Supported test configurations for NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

Configuration	Description
11.3.1.1.4.1-1	With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz

Configure the test equipment and the DUT according to the parameters in Table 11.3.1.1.4.1-2

Table 11.3.1.1.4.1-2: Initial conditions for NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 11.3.1.1.4.1-1	

Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 11.3.1.1.4.3.

2. For this test a single NR cell is used which is subject to DL CCA. The connection setup is done according to the settings in Annex C.1.3, and the downlink signal levels as per Annex C.1.2. Table 11.3.1.1.5.1-1 defines the Cell specific test parameters to be configured and strength of the transmitted signals.

11.3.1.1.4.2 Test procedure

The test consists of a single NR cell (PCell) subject to CCA which operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table 11.3.1.1.5.1-2, used as a measurement reference facilitating the SS timing estimation. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test:

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set up NR Cell according to parameters given in Table 11.3.1.1.5-1.

3. The SS shall transmit an *RRCConnectionReconfiguration* message configuring the UE with the message content defined in clause 11.3.1.1.4.3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.3.1.1.5-1

5. After connection set up with the cell and during 2 seconds before DL timing adjustment, the test equipment shall monitor all SRS transmissions and verify that, for each received SRS, the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB:

   a. The N_{TA} offset value (in T_c units) is 25600 for FR1.

   b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 11.3.1.1.5-4.

6. The test system shall adjust the timing of the DL path by values given in Table 11.3.1.1.4.2-1. For Test 2, the DL timing change shall be applied within the first half of the DRX cycle upon expiration of the preceding DRX ON duration.

Table 11.3.1.1.4.2-1: Adjustment Value for DL Timing for NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
30	+32*64T_c	+16*64T_c

7. The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Table 11.3.1.1.5-5. This will only be done for Test1. The test system samples the UE Transmit Timing once per SRS transmission (as per configured SRS periodicity). To check Rule 1, the SS shall check that the maximum time adjustment step size T_q between one SRS transmission to next consecutive SRS transmission of a valid UL slot is within Rule 1 as specified in clause 11.3.1.0.1 and Table 11.3.1.0.1-3. To check that the minimum adjustment rate is within Rule 2 as specified in clause 11.3.1.0.1 and Table 11.3.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 1 + offset seconds sliding window (offset in ms to the next consecutive SRS transmission), with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. To check that the maximum adjustment rate is within Rule 3 as specified in clause 11.3.1.0.1 and Table 11.3.1.0.1-3, the SS shall measure the change in SRS transmission timing over a 200ms - offset sliding window of previous SRS transmission, with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot. The three rules apply until the UE transmit timing offset is within the limits specified in 11.3.1.0.1 and Table 11.3.1.0.1-3 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1. The test system will wait till evaluation interval of T seconds is met to ensure UE transmit timing is stable at the end of the step, where T=.DL_timing_change[Ts]/6.6Ts and DL_timing_change is specified in Table 11.3.1.1.4.2-1.

8. After the UE transmit timing is within the limits specified in step 7, and during 2 seconds, the test system shall monitor all SRS transmissions and verify that, for each received SRS, the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

11.3.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.3.1.1.4.3-0: Common Exception messages for NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.3.1.1.4.3-1: *SRS-Config* : Additional test requirement for NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {			
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {			
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	14		SCS15
	25		SCS30
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			
periodic SEQUENCE {			

periodicityAndOffset-p CHOICE {			
sl1	0		Test 1
sl320	3		Test 2 and SCS15
sl640	5		Test 2 and SCS30
}			
}			
}			
}			
}			
}			

Table 11.3.1.1.4.3-2: *DRX-Config* : Additional test requirement for NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
DRX-Config ::= CHOICE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms6		
}			
drx-InactivityTimer	ms1		
drx-HARQ-RTT-TimerDL	56		
drx-HARQ-RTT-TimerUL	56		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms320	0		
}			
shortDRX		Not present	
}			

11.3.1.1.5 Test Requirements

Table 11.3.1.1.5-1: Cell Specific Test Parameters for NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

Parameter		Unit	Configuration	Test1	Test2
SSB ARFCN			1	1	1
TDD configuration			1	TDDConf.1.1 CCA	
$BW_{channel}$		MHz	1	40: $N_{RB,c}$ = 106	
Initial BWP Configuration			1	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration			1	DLBWP.1.1 ULBWP.1.1	
DRX Cycle		ms	1	N/A	DRX.8 Note5
DL CCA model			1	As specified in clause D.7.2.1	
UL CCA model			1	As specified in clause D.7.2.2	
PDSCH Reference measurement channel			1	SR.1.1 CCA	
RMSI CORESET Reference Channel			1	CR.1.1 CCA	
Dedicated CORESET Reference Channel			1	CCR.1.1 CCA	
OCNG Patterns			1	OP.1	
SSB configuration	Semi- static channel acces		1	SSB.1 CCA	
	Dymamic channel acces		1	SSB.2 CCA	
SMTC Configuration			1	SMTC.1 FR1	
TRS configuration			1	TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})			1	0.9375	0.9375
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)			1	0.75	0.75

DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		1	0.75	0.75
UL CCA probability (P_{CCA_UL})		1	1	1
EPRE ratio of PSS to SSS	dB	1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/30 KHz	1	-95	-95
$\hat{E}_s / I_{ot}$		1	3	3
$\hat{E}_s / N_{oc}$		1	3	3
SS-RSRP Note3	dBm/30 kHz	1	-92	-92
Io Note3	dBm/38.1MHz	1	-59.2	-59.2
Propagation condition		1	AWGN	
SRS Config		1	SRSConf.1 Note6	SRSConf.2 Note6

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: DRX related parameters are given in Table 11.3.1.1.5-3

Note 6: SRS configs are given in Table 11.3.1.1.5-2

Note 7: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause D.7.2.

Note 8: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.3.1.1.5-2: SRS Configuration for NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	14 for test configuration 1,2	25	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	

	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl640, 0	Offset to align with DRX periodicity
	sequenceId	0	0	Any 10 bit number

Table 11.3.1.1.5-3: DRX-Configuration for NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

Field	Test 2
	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
longDRX-CycleStartOffset	320 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
NOTE: The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [13].	

Table 11.3.1.1.5-4: T_e Timing Error Limit for NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

Frequency Range	SCS of SSB signals (KHz)	SCS of uplink signals s(KHz)	T_e
1	30	15	$9.75*64*T_c$
		30	$9.75*64*T_c$
		60	$8.75*64*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [6].			

Table 11.3.1.1.5-5: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate for NR SA FR1 UE Transmit Timing Test with PCell under DL CCA

Frequency Range	SCS of uplink signals (KHz)	T_q	T_p	Maximum Adjustment Rate
1	15	$6*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
	30	$6*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
	60	$6*64*T_c$	$1.9*64*T_c$	$6.6*64*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [6].				

11.3.2 UE timing advance

11.3.2.0 Minimum conformance requirements

The timing advance is initiated from PSCell in EN-DC operation mode with MAC message that implies and adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [12].

11.3.2.0.1 Minimum conformance requirements for timing advance adjustment delay

UE shall adjust the timing of its uplink transmission timing at time slot $n+ k+1$ for a timing advance command received in time slot n, and the value of k is defined in clause 4.2 in TS 38.213 [3]. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

11.3.2.0.2 Minimum conformance requirements for timing advance adjustment accuracy

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 11.3.2.0.2-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS 38.213 [3].

Table 11.3.2.0.2-1: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	15	30	60	120	480	960
UE Timing Advance adjustment accuracy	±256 T_c	±256 T_c	±128 T_c	±32 T_c	±10 T_c	±6 T_c

The normative reference for this requirement is TS.38.133 [6] clause 7.3.2.

11.3.2.1 NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA

11.3.2.1.1 Test purpose

The purpose of the test is to verify UE timing advance adjustment delay and accuracy requirement defined in clause 7.3 of TS 38.133 [6].

11.3.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone NR-U with a UL shared spectrum NR carrier.

11.3.2.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 11.3.2.0.1 and clause 11.3.2.0.2.

The normative reference for this requirement is TS.38.133 [6] clause A.11.3.2.1.

11.3.2.1.4 Test description

11.3.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.3.2.1.4.1-1.

Table 11.3.2.1.4.1-1: Supported test configurations for NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA

Config	Description
11.3.2.1-1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE supporting SA operation only on NR band(s) with shared spectrum access is required to be tested	

Configure the test equipment and the DUT according to the parameters in Table 11.3.2.1.4.1-2

Table 11.3.2.1.4.1-2: Initial conditions for NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.3.2.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part	

Table 11.3.2.1.4.1-3: General test parameters for NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.8.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.8.1-2
Initial UL BWP		ULBWP.0.1	As specified in Table A.8.2-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.8.2-2
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096*T_c$ (based on equation in clause 4.2 of TS 38.213 [8])
T1	s	5	
T2	s	5	

1. Message contents are defined in clause 11.3.2.1.4.3.

2. Single Cell is used, which is NR FR1 PCell under CCA. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.

10.2.2.1.4.2 Test Procedure

The test consists of a single NR cell (PCell) subject to CCA that operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test consists of consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in able 11.3.2.1.5-1 and Table 11.3.2.1.5-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured. The UE Time Alignment Timer (timeAlignmentTimer IE), described in Clause 5.2 in TS 38.321 [12], shall be configured so that it does not expire in the duration of the test. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i} = P_{CCA_UL} = 1$) at the start of the test

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to values in Tables 11.3.2.1.4.1-3 and Table 11.3.2.1.5-1 as appropriate. Propagation conditions are set according to clause C.2.2.

3. SS shall transmit an *RRCConnectionReconfiguration* message.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.3.2.1.5-1.

5. During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [12]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [8] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

6. During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table 11.3.2.1.4.1-3. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

7. As specified in Clause 7.3.2.1 of TS 38.133 [6], the UE adjusts its uplink timing at slot n+k+1 for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

8. The UE Time Alignment Timer, described in clause 5.2 in TS 38.321 [12], shall be configured so that it does not expire in the duration of the test.

9. The result from the SRS and adjustment of the timing advance in step 7) is used to measure that the UE adjusts the timing of its transmission with a relative accuracy better than or equal to value specified in Table 11.3.2.0.2-1 to the signalled timing advance value compared to the timing of preceding uplink transmission.

10. If the UE adjust the timing of its transmission within a relative accuracy greater than or equal to value specified in Table 11.3.2.0.2-1 to the signalled timing advance value compared to the timing of preceding uplink transmission then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

11. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

12. After the RRC connection release, the SS transmits in Cell a Paging message (including PagingRecord with ue-Identity) for the UE and ensures the UE is in State RRC_CONNECTED according to TS 38.508-1 [14] clause 4.5.4 or if the paging fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED according to TS 38.508-1 [14] clause 4.5.4.

13. If Step 12 fails, switch off and on the UE and ensure the UE is in RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

14. Repeat steps 3-13 until the confidence level according to Annex G clause G.2.7 is achieved.

11.3.2.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clause 7.3, with the following exceptions:

Table 11.3.2.1.4.3-0: Common Exception messages for NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.9-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.3.2.1.4.3-1: *srs-Config* setup for NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA

Derivation Path: TS 38.508-1, Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {	1 entry		
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {	1 entry		

Derivation Path: TS 38.508-1, Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	12		Config 1,2,4,5
	24		Config 3,6
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
sl5	2	Once every 5 Slots	SCS15
sl5	4	Once every 5 Slots	SCS30
}			
}			
}			
}			
}			
}			

11.3.2.1.5 Test Requirement

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. *k+1* slots after the reception of the timing advance command, where k=5.

The Timing Advance adjustment accuracy shall be within the limits specified in Table 11.3.2.1.5-3.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

Table 11.3.2.1.5-1 and Table 11.3.2.1.5-2 define the primary level settings.

Table 11.3.2.1.5-1: Cell specific test parameters for NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA

Parameter			**Unit**	**Test1**	
				T1	**T2**
TDD configuration		Config 1		TDDConf.1.1 CCA	
$BW_{channel}$		Config 1	MHz	40: $N_{RB,c}$ = 106	
BWP BW		Config 1	MHz	40: $N_{RB,c}$ = 106	
DRX Cycle		Config 1	ms	Not Applicable	
DL CCA model		Config 1		As specified in clause D.7.2.1	
UL CCA model		Config 1		As specified in clause D.7.2.2	
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA	
CORESET Reference Channel		Config 1		CR.1.1 CCA	
TRS configuration		Config 1		TRS.1.2 TDD	
OCNG Patterns		Config 1		OCNG pattern 1	
SMTC configuration		Config 1		SMTC.1 FR1	
SSB configuration	Semi-static channel acces	Config 1		SSB.1 CCA	
	Dymamic channel acces	Config 1		SSB.2 CCA	
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1		1	
DL CCA model probability for dynamic		Config 1		1	

static channel access ($P_{CCA_DL_1}$)			
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)	Config 1		1
UL CCA probability P_{CCA}	Config 1		1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2	Config 1	dBm/30 kHz	-95
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
Io Note3	Config 1	dBm/ 38.16MHz	-62.58
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause D.7.2.

Note 5: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.3.2.1.5-2: Sounding Reference Symbol Configuration for NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA

Field	Value	Comment
c-SRS	24	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission

Note: For further information see clause 6.3.2 in TS 38.331 [13].

Table 11.3.2.1.5-3: UE Timing Advance adjustment accuracy for NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA

Sub Carrier Spacing, SCS kHz	15	30	60
UE Timing Advance adjustment accuracy	±344 T_c	±344 T_c	±216 T_c

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95 %.

11.4 Signalling characteristics

11.4.1 Radio link monitoring

11.4.1.0 General

Same as in clause 10.3.1.0.

11.4.1.0.1 Minimum conformance requirements for SSB based radio link monitoring under CCA

Same as in clause 10.3.1.0.1.

11.4.1.0.1.1 Minimum requirement for SSB based Radio Link Monitoring under CCA

Same as in clause 10.3.1.0.1.1.

11.4.1.0.1.2 Measurement restrictions for SSB based RLM under CCA

Same as in clause 10.3.1.0.1.2.

11.4.1.1 Requirements for determining UE in-sync or out-of-sync status

In the test cases specified in clause 11.4.1, any uplink signal transmitted by the UE is used for detecting the in-/out-of-sync state of the UE. In terms of measurement, the uplink signal is verified based on the UE output power:

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [2]) means uplink signal.
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [2]) means no uplink signal.

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

The normative reference for this requirement is TS 38.133 [6] clause A.11.4.1.1.

11.4.1.2 NR SA FR1 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

11.4.1.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 PCell radio link monitoring requirements in clause 11.4.1.0.

11.4.1.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting UL and SSB-based RLM on shared channel access.

11.4.1.2.3 Minimum conformance requirement

The minimum requirements are specified in clause 11.4.1.0.1. The measurement restrictions for SSB based RLM under CCA are specified in clause 11.4.1.0.2. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.11.4.1.2.

11.4.1.2.4 Test description

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 11.4.1.2.4.1-1. The test parameters are given in Tables 11.4.1.2.4.1-3, 11.4.1.2.5-1, and 11.4.1.2.5-2 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

The test consists of three successive time periods, with time duration of T1, T2 and T3, respectively. Figure 11.4.1.2.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40 ms) in the test.

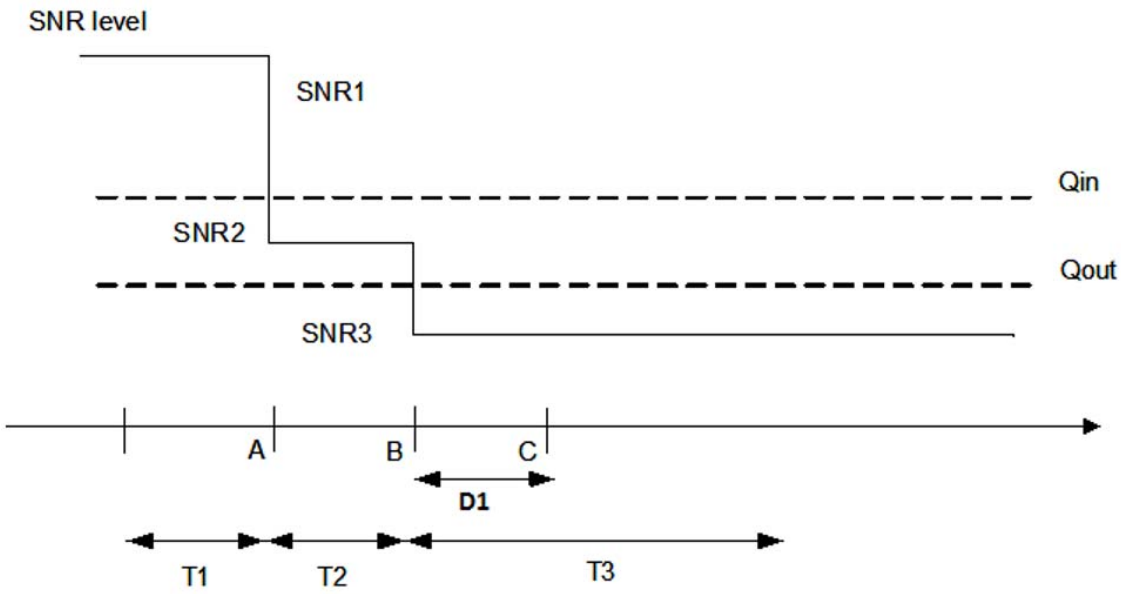

Figure 11.4.1.2.4-1: SNR variation for NR SA FR1 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

11.4.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.4.1.2.4.1-1.

Table 11.4.1.2.4.1-1: Supported test configurations for NR SA FR1 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Configuration	Description

11.4.1.2-1	TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Configure the test equipment and the DUT according to the parameters in Table 11.4.1.2.4.1-2.

Table 11.4.1.2.4.1-2: Initial conditions for NR SA FR1 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 11.4.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 11.4.1.2.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 11.4.1.2.4.1-3.

Table 11.4.1.2.4.1-3: General test parameters for NR SA FR1 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
DL CCA model				As specified in clause D.7.2.1
UL CCA model				As specified in clause D.7.2.2
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1	MHz	40: $N_{RB,c}$ = 106
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD configuration		Config 1		TDDConf.1.1 CCA
CORESET Reference Channel		Config 1		CR.1.1 CCA
SSB configuration for semi-static channel access Note 3, 5		Config 1		SSB.1 CCA
SSB configuration for dynamic channel access Note 4, 5		Config 1		SSB.2 CCA
DBT window configuration		Config 1		DBT.1
PDSCH/PDCCH subcarrier spacing		Config 1		30 kHz
PRACH Configuration		Config 1		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				OFF
Gap pattern ID				gp0
Layer 3 filtering				Enabled
T310 timer			ms	0
T311 timer			ms	1000
N310				1
N311				1
CSI-RS configuration for CSI reporting		Config 1		CSI-RS.2.1 TDD
CSI-RS for tracking		Config 1		TRS.1.2 TDD
T1			s	0.2
T2			s	1.04
T3			s	1.04
D1			s	1
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

11.4.1.2.4.2 Test Procedure

The test consists of a single NR cell (PCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to the PCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 11.4.1.2.4.1-3.

The CCA model (both DL and UL) is disabled (i.e. PCCA_DL_i= PCCA_UL=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. The SS sends an *RRCReconfiguration* message to the UE to configure inter-frequency measurement with the corresponding gap pattern and periodic CSI reporting.

3. The UE sends an *RRCReconfigurationComplete* message.

4. Set the parameters of NR Cell according to T1 in Table 11.4.1.2.5-1. Propagation conditions are set according to clause C.2.3. The SS shall enable DL and UL CCA model according to Table 11.4.1.2.5-1. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 11.4.1.2.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 11.4.1.2.5-1. T3 starts.

7. If the SS:

   a) detects uplink power equal to or higher than minimum output power, according to section 11.4.1.1, in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point B; and

   b) does not detect any uplink power higher than OFF power, according to section 11.4.1.1, from time point C (D1 after the start of T3) until T3 expires, the number of successful tests is increased by one.

   Otherwise, the number of failed tests is increased by one and proceed with step 10.

8. When T3 expires the SS shall change the SNR value to T1 as specified in Table 11.4.1.2.5-1.
9. If the UE has re-established the connection within 2 seconds, proceed with step 11. Otherwise, proceed with step 10.
10. The SS shall switch off and then on the UE and then proceed with step 1.
11. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.4.1.2.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 11.4.1.2.4.3-1: Common Exception messages for NR SA FR1 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-6 with conditions gapUE and RLM Table H.3.1-8 with Condition SSB RLM Table H.3.5-4 Table H.3.5-9 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 11.4.1.2.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

11.4.1.2.5 Test Requirement

Table 11.4.1.2.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA.

Table 11.4.1.2.5-1: Cell-specific test parameters for NR SA FR1 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter		Unit	Test 1		
			T1	T2	T3
DL CCA probability P_{CCA_DL}	Note 6,8		P_{CCA_DL}=0.9375		
	Note 7,8		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		
UL CCA probability P_{CCA_UL}			1		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			

EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR[Note 3,4] on RLM-RS	Config 1	dB	1.8	-6.2	-15.8
SNR on other channels and signals	Config 1	dB	1		
N_{oc}	Config 1	dBm/SCS	-95		
Propagation condition			TDL-C 300 ns 100 Hz		
NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows. NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows. NOTE 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3, respectively, in Figure 11.4.1.2.4-1. NOTE 5: The SNR values are specified for testing a UE which supports 2 RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 is D.4A. NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.					

Table 11.4.1.2.5-2: Measurement gap configuration for NR SA FR1 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Field	Test 1	
	Value	
gapOffset	0	
NOTE: Ensure that RLM RS is partially overlapped with measurement gap0		

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

- During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.
- The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

11.4.1.3 NR SA FR1 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

11.4.1.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 PCell radio link monitoring requirements in clause 11.4.1.0.

11.4.1.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting UL and SSB-based RLM on shared channel access.

11.4.1.3.3 Minimum conformance requirement

The minimum requirements are specified in clause 11.4.1.0.1. The measurement restrictions for SSB based RLM under CCA are specified in clause 11.4.1.0.2. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.11.4.1.3.

11.4.1.3.4 Test description

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table 11.4.1.3.4.1-1. The test parameters are given in Tables 11.4.1.3.4.1-3 and 11.4.1.3.5-1. There is one cell (Cell 1), which is the active NR cell in FR1, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5, respectively. Figure 11.4.1.3.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model.

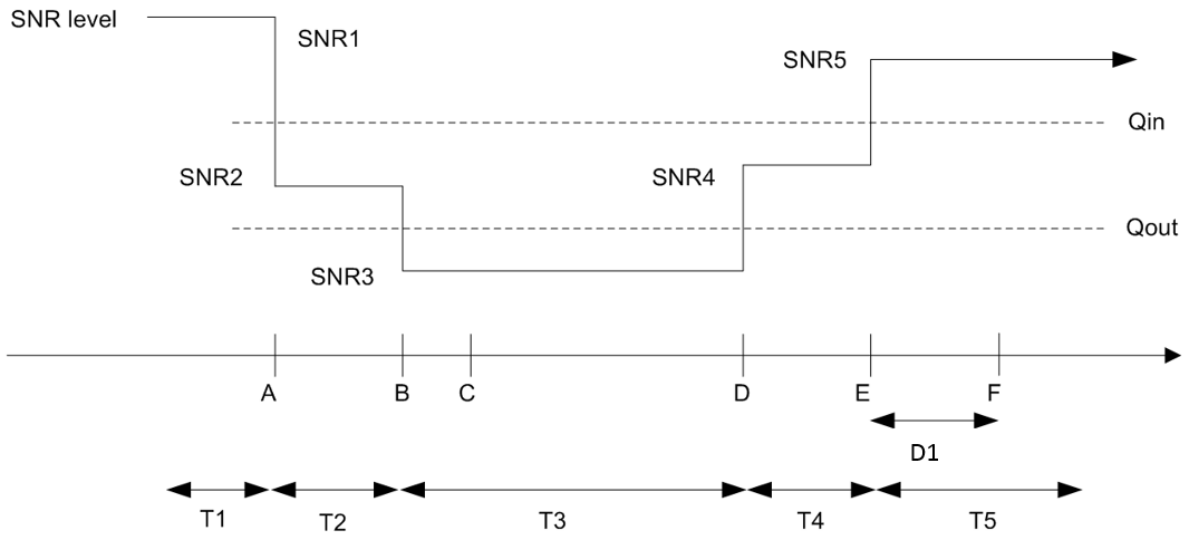

Figure 11.4.1.3.4-1: SNR variation for NR SA FR1 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

11.4.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.4.1.3.4.1-1.

Table 11.4.1.3.4.1-1: Supported test configurations for NR SA FR1 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Configuration	Description
11.4.1.3-1	TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Configure the test equipment and the DUT according to the parameters in Table 11.4.1.3.4.1-2.

Table 11.4.1.3.4.1-2: Initial conditions for NR SA FR1 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 11.4.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 11.4.1.3.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 11.4.1.3.4.1-3.

Table 11.4.1.3.4.1-3: General test parameters for NR SA FR1 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
DL CCA model				As specified in clause D.7.2.1
UL CCA model				As specified in clause D.7.2.2
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1	MHz	40: $N_{RB,c}$ = 106
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.1.1 CCA
CORESET Reference Channel		Config 1		CR.1.1 CCA
SSB configuration for semi-static channel access Note 3, 5		Config 1		SSB.1 CCA
SSB configuration for dynamic channel access Note 4,5		Config 1		SSB.2 CCA
DBT window configuration		Config 1		DBT.1
PDSCH/PDCCH subcarrier spacing		Config 1		30 kHz
PRACH Configuration		Config 1		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0

	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N/A
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.52
T4		s	0.2
T5		s	2.04
D1		s	2
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

11.4.1.3.4.2 Test Procedure

The test consists of a single NR cell (PCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to the PCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 11.4.1.3.4.1-3. The CCA model (both DL and UL) is disabled (i.e. PCCA_DL_i= PCCA_UL=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. The SS sends an *RRCReconfiguration* message to the UE to configure periodic CSI reporting.

3. The UE sends an *RRCReconfigurationComplete* message.

4. Set the parameters of NR Cell according to T1 in Table 11.4.1.3.5-1. Propagation conditions are set according to clause C.2.3. The SS shall enable DL and UL CCA model according to Table 11.4.1.3.5-1. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 11.4.1.3.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 11.4.1.3.5-1. T3 starts.
7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 11.4.1.3.5-1. T4 starts.
8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 11.4.1.3.5-1. T5 starts.
9. If the SS detects uplink power equal to or higher than minimum output power, according to section 11.4.1.1, in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point F (D1 seconds after the start of time duration T5), the number of successful tests is increased by one. After the expiration of T5, the SS shall proceed with step 11 for the next iteration, or with step 10.

   Otherwise, the number of failed tests is increased by one and proceed with step 10.
10. The SS shall switch off and then on the UE and then proceed with step 1.
11. Repeat steps 4-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.4.1.3.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 11.4.1.3.4.3-1: Common Exception messages for NR SA FR1 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition L3 FILTERING NEEDED, Table H.3.1-3 with Condition RLM Table H.3.1-4 with A3-offset = 0 Table H.3.1-8 with Condition SSB RLM Table H.3.5-4 Table H.3.5-9 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 11.4.1.3.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms2000		
n310	n1		
t311	ms1000		
n311	n1		
}			

11.4.1.3.5 Test Requirement

Table 11.4.1.3.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA.

Table 11.4.1.3.5-1: Cell-specific test parameters for NR SA FR1 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode under CCA

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability P_{CCA_DL}	Note 6,8		P_{CCA_DL}=0.9375				
	Note 7,8		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75				
UL CCA probability P_{CCA_UL}			1				
L_{CCA_DL}			7				
W_{CCA_DL}		ms	$T_{Evaluate_in_SSB,CCA}$ NOTE 9				
EPRE ratio of PDCCH DMRS to SSS		dB	4				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8	-5.3	1.8
SNR on other channels and signals	Config 1	dB	1				
N_{oc}	Config 1	dBm/SCS	-95				
Propagation condition			TDL-C 300ns 100Hz				

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows.
NOTE 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 11.4.1.3.4-1.
NOTE 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 and T4 is modified as specified in clause D.4A.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.
NOTE 9: As defined in Table 11.4.1.0.1-1.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

- During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

11.4.2 Void

11.4.3 SCell activation and deactivation delay

11.4.3.0 Minimum conformance requirements

11.4.3.0.1 Minimum conformance requirements for SCell activation and deactivation delay

Same as in clauses 10.3.3.0.1 for activation delay requirement and 10.3.3.0.2 for deactivation delay requirement.

11.4.3.1 NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

11.4.3.1.1 Test purpose

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell both under CCA, are within the requirements stated in clause 11.4.3.0.1, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 160 ms.

11.4.3.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting NR-U with a shared spectrum NR carrier and 2DL CA in NR.

11.4.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.4.3.0.1 for SCell Activation Delay Requirement for Deactivated SCell under CCA and SCell Deactivation Delay Requirement for Activated SCell under CCA correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.11.4.3.1.

11.4.3.1.4 Test description

11.4.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations are shown in Table 11.4.3.1.4.1-1.

Table 11.4.3.1.4.1-1: Supported test configurations for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Configuration	Description
11.4.3.1-1	With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.4.3.1.4.1-2.

Table 11.4.3.1.4.1-2: Initial conditions for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.4.3.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.	

Table 11.4.3.1.4.1-3: General test parameters for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two radio channels (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ TAE as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	$10 + 5 \cdot 2^{\mu_{DL}}$	The delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] μ_{DL} is the subcarrier spacing configuration for DL

1. Message contents are defined in clause 11.4.3.1.4.3.

2. Cell 1 and Cell 2 are NR FR1 cells with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 1 is the PCell and Cell 2 is the deactivated SCell

11.4.3.1.4.2 Test procedure

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two carriers, each with one cell: Cell 1 (PCell) on radio channel 1 (PCC) in NR with CCA, and Cell2 (SCell) on radio channel 2 (SCC) in NR with CCA. Before the test starts the UE is connected to Cell 1, but is not aware of Cell 2, as the UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. At the end of T1, the test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted *m*, defines the start of time period T2. The UE shall be able to report a valid CSI in PCell for the activated SCell at latest in slot *m* +

(T_{HARQ}+$T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, as defined in TS 38.133 [6] clause 8.3A.2. The UE shall start reporting CSI in PCell in first available uplink resource for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting following slot $m+\frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption shall fall within the time window specified in TS 38.133 [6] clause 8.3A.2.

The point in time at which the MAC message is received by at the UE antenna connector, in a slot # denoted *n*, defines the start of time period T3. The UE shall complete the activation at latest in slot $n+\frac{T_{\mathrm{HARQ}}+3\mathrm{ms}}{\mathrm{NR\ slot\ length}}$. Any PCell interruption shall fall within the time window specified in TS 38.133 [6] clause 8.3A.3.

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 11.4.3.1.4.1-3 and 11.4.3.1.5**-**1. Propagation conditions are set according to Annex C clauses C.2.2. The SS shall enable DL and UL CCA model according to Table 11.4.3.1.5-1.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1 1 and provide measurement configurations with the message content exceptions defined in clause 11.4.3.1.4.3.

3a. The UE sends a *MeasurementReport* message. If the TE doesn't receive the *MeasurementReport* during T1, go to step 9.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m and T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot s_{first_CSI} = m + 1 + $\frac{\mathrm{T_{HARQ}+3ms}+T_{CSI_Reporting_withCCA}}{NR\ slot\ length}$,

     - or slot $s^{int}_{first_CSI} = m + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting_withCCA}+T_X}{NR\ slot\ length}$ if the slot s_{first_CSI} was subject to interruption,

     - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI}$ = m + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time_withCCA}}+T_{\mathrm{CSI_Reporting_withCCA}}}{\mathrm{NR\ slot\ length}}$,

     - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

     - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if $s_{nonzero_CQI}$ was subject to interruption,

   - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length}$up to the end of T2

     - Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 9.

7. When T2 expires, the SS deactivate SCC by sending the deactivation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n and T3 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 8, otherwise go to step 9.

8. The UE shall stop sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell during SCell deactivation.

   - If the last CSI report is received by the SS earlier than or equal to slot n + $\frac{\mathrm{T_{HARQ}}+3ms}{NR\ slot\ length}$

   - and DTX is not observed by the SS outside the slot n + 1 + $\frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$ up to the end of T3,

   - Then the number of successes for the event "Deactivation" is increased by one. Otherwise, count a fail for the event "Deactivation".

9. When T3 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event “Activation” in step 6, or Deactivation in step 7 was not acknowledged, the SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

10. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

11. After the RRC connection release, the SS:
    - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
    or
    - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

12. Repeat steps 2-11 until a test verdict has been achieved.

Each of the events "Activation" and "Deactivation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Annex G.2.7 is achieved. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

11.4.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 11.4.3.1.4.3-1: Common Exception messages for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.4.3.1.4.3-2: *RRCReconfiguration*: SCell addition for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			

measConfig	MeasConfig	Table 11.4.3.1.4.3-2A	
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell	Table 11.4.3.1.4.3-5	
}			
}			
}			
}			

Table 11.4.3.1.4.3-2A: *MeasConfig* (Table 11.4.3.1.4.3-2) for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 11.4.3.1.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 11.4.3.1.4.3-4	
}			
}			
}			
}			

Table 11.4.3.1.4.3-3: *MeasObjectNR* for SCell for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 11.4.3.1.4.3-4: *ReportConfigNR* for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	

}			
}			
}			
}			
}			
}			

Table 11.4.3.1.4.3-5: *CellGroupConfig-SCell* (Table 11.4.3.1.4.3-2) for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 11.4.3.1.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 11.4.3.1.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 11.4.3.1.4.3-6: *ServingCellConfig-SpCell* (Table 11.4.3.1.4.3-5) for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 11.4.3.1.4.3-7: *ServingCellConfig-SCell* (Table 11.4.3.1.4.3-5) for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

11.4.3.1.5 Test requirements

Table 11.4.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 11.4.3.1.5-1: Cell specific test parameters for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		TDD			TDD		
TDD configuration	Config 1		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106			40: $N_{RB,c}$ = 106		
DL CCA model			As specified in clause D.7.2.1			As specified in clause D.7.2.1		
UL CCA model			As specified in clause D.7.2.2			As specified in clause D.7.2.2		
DL CCA probability for semi-static channel access	P_{CCA_DL}		0.9375			0.9375		
DL CCA probability for dynamic channel access	$P_{CCA_DL_1}$		0.75			0.75		
	$P_{CCA_DL_2}$		0.75			0.75		
UL CCA probability for semi-static channel access	P_{CCA_UL}		0.87			0.87		
UL CCA probability	P_{CCA_UL}		0.75			0.75		
L_{CCA_DL} Note 8			2			2		
W_{CCA_DL} Note 8		ms	$T_{activation_time_withCCA}$			$T_{activation_time_withCCA}$		
Initial downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Initial uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
Dedicated downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Dedicated uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
TCI state			TCI.State.0			TCI.State.0		
TRS Configuration	Config 1		TRS.1.2 TDD			TRS.1.2 TDD		
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA			SR.1.1 CCA		
Dedicated CORESET parameters	Config 1		CCR.1.3 CCA			SR.1.1 CCA		
RMSI CORESET parameters	Config 1		CR.1.1 CCA			SR.1.1 CCA		
OCNG Patterns Note1			OP.1			OP.1		
SSB Configuration for semi-static channel access	Config 1		SSB.1 CCA			SSB.1 CCA		
SSB Configuration for dynamic channel access	Config 1		SSB.2 CCA			SSB.2 CCA		
SMTC configuration			SMTC.1			SMTC.1		
EPRE ratio of PSS to SSS		dB	0			0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS Note1								
EPRE ratio of OCNG to OCNG DMRS Note1								
N_{oc} Note2	Config 1	dBm/15kHz	-104			-104		
N_{oc} Note2	Config 1	dBm/SCS	-101			-101		
$\hat{E}_s/I_{ot}$		dB	17			17		
$\hat{E}_s/N_{oc}$		dB	17			17		
SS-RSRP Note3	Config 1	dBm/SCS	-84			-84		
Io Note3	Config 1	dBm/ 38.16MHz	-52.87			-52.87		
Propagation condition		-	AWGN					

Note 1: OCNG shall be used such that resources in the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8:	As specified in TS 38.133 [6] clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [8] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+$T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA}$ = $T_{FirstSSB}$ + L_1*T_{rs} + 5ms, as specified in TS 38.133 [6] clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with T_X = $T_{FirstSSB.}$

During T3, interruption on PCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PCell shall not be more than specified for SA in TS 38.133 [6] clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

11.4.3.2 NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 640 ms SCell measurement cycle

11.4.3.2.1 Test purpose

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell under CCA, are within the requirements stated in clause 11.4.3.0.1, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 640 ms.

11.4.3.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting NR-U with a shared spectrum NR carrier and 2DL CA in NR.

11.4.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.4.3.0.1 for SCell Activation Delay Requirement for Deactivated SCell under CCA and SCell Deactivation Delay Requirement for Activated SCell under CCA correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.11.4.3.2.

11.4.3.2.4 Test description

11.4.3.2.4.1 Initial conditions

Same initial conditions as described in section 11.4.3.1.4.1 with following exception:

- The listed parameter values in Tables 11.4.3.2.4.1-3 will replace the values of corresponding parameters in Tables 11.4.3.1.4.1-3.

Table 11.4.3.2.4.1-3: General test parameters for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

11.4.3.2.4.2 Test procedure

Same test procedure as described in section 11.4.3.1.4.2.

11.4.3.2.4.3 Message contents

Same message contents as described in section 11.4.3.1.4.3 with following exception:

- Table 11.4.3.1.4.3-3 is replaced by Table 11.4.3.2.4.3-1.

Table 11.4.3.2.4.3-1: MeasObjectNR for SCell

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf640		
}			

11.4.3.2.5 Test requirements

Table 11.4.3.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 11.4.3.2.5-1: Cell specific test parameters for NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 640 ms SCell measurement cycle

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		TDD			TDD		
TDD configuration	Config 1		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106			40: $N_{RB,c}$ = 106		
DL CCA model			As specified in clause D.7.2.1			As specified in clause D.7.2.1		
UL CCA model			As specified in clause D.7.2.2			As specified in clause D.7.2.2		
DL CCA probability for semi-static channel access Note 5,7	P_{CCA_DL}		0.9375			0.9375		
DL CCA probability for dynamic channel access Note 6,7	$P_{CCA_DL_1}$		0.75			0.75		
	$P_{CCA_DL_2}$		0.75			0.75		
UL CCA probability for semi-static channel access	P_{CCA_UL}		0.87			0.87		
UL CCA probability	P_{CCA_UL}		0.75			0.75		
L_{CCA_DL} Note 8			2			2		
W_{CCA_DL} Note 8		ms	$T_{activation_time_withCCA}$			$T_{activation_time_withCCA}$		
Initial downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Initial uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
Dedicated downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Dedicated uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
TCI state			TCI.State.0			TCI.State.0		

TRS Configuration	Config 1		TRS.1.2 TDD	TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA	SR.1.1 CCA
Dedicated CORESET parameters	Config 1		CCR.1.3 CCA	SR.1.1 CCA
RMSI CORESET parameters	Config 1		CR.1.1 CCA	SR.1.1 CCA
OCNG Patterns Note1			OP.1	OP.1
SSB Configuration for semi-static channel access Note5,7	Config 1		SSB.1 CCA	SSB.1 CCA
SSB Configuration for dynamic channel access Note6,7	Config 1		SSB.2 CCA	SSB.2 CCA
SMTC configuration			SMTC.1	SMTC.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	Config 1	dBm/15kHz	-104	-104
N_{oc} Note2	Config 1	dBm/SCS	-101	-101
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
SS-RSRP Note3	Config 1	dBm/SCS	-84	-84
Io Note3	Config 1	dBm/ 38.16MHz	-52.87	-52.87
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that resources in the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8: As specified in TS 38.133 [6] clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

During During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [8] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+$T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA}$ = $T_{FirstSSB_MAX}$ + $L_{2,1}$*T_{SMTC_MAX} + (1 +$L_{2,2}$)*T_{rs} + 5ms, as specified in TS 38.133 [6] clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with T_X = $T_{FirstSSB_MAX}$ + $L_{2,1}$* T_{SMTC_MAX}.

During T3, interruption on PCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PCell shall not be more than specified for SA in TS 38.133 [6] clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

11.4.3.3 NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA

11.4.3.3.1 Test purpose

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell under CCA, are within the requirements stated in clause 11.4.3.0.1, when the SCell is unknown to the UE at the time of activation.

11.4.3.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting NR-U with a shared spectrum NR carrier and 2DL CA in NR.

11.4.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.4.3.0.1 for SCell Activation Delay Requirement for Deactivated SCell under CCA and SCell Deactivation Delay Requirement for Activated SCell under CCA correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.11.4.3.3.

11.4.3.3.4 Test description

11.4.3.3.4.1 Initial conditions

Same initial conditions as described in section 11.4.3.1.4.1 with following exception:

- The listed parameter values in Tables 11.4.3.3.4.1-3 will replace the values of corresponding parameters in Tables 11.4.3.1.4.1-3.

Table 11.4.3.3.4.1-3: General test parameters for NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA

Parameter	Unit	Value	Comment
T1	s	0.1	During this time period the PCell shall be known and the SCell configured, but not detected.

11.4.3.3.4.2 Test procedure

Same test procedure as described in section 11.4.3.1.4.2, except step 3 and step 5 are replaced by following steps:

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1. The SCell (Cell 2) shall be powered OFF till T2 starts.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m, power ON the SCell (Cell2), T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

and:

- Step 3a is removed.

11.4.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 11.4.3.3.4.3-1: Common Exception messages for NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 11.4.3.3.4.3-2: *RRCReconfiguration* in step 3: SCell addition for NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 11.4.3.3.4.3-3	
}			
}			
}			
}			

Table 11.4.3.3.4.3-3: *CellGroupConfig* (Table 11.4.3.3.4.3-2) for NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
spCellConfigDedicated	ServingCellConfig-SpCell	Table 11.4.3.3.4.3-4	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 11.4.3.3.4.3-5	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 11.4.3.3.4.3-4: *ServingCellConfig-SpCell* (Table 11.4.3.3.4.3-3) for NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 11.4.3.3.4.3-5: *ServingCellConfig-SCell* (Table 11.4.3.3.4.3-3) for NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

11.4.3.3.5 Test requirements

Table 11.4.3.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 11.4.3.3.5-1: Cell specific test parameters for NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		TDD			TDD		
TDD configuration	Config 1		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106			40: $N_{RB,c}$ = 106		
DL CCA model			As specified in clause D.7.2.1			As specified in clause D.7.2.1		
UL CCA model			As specified in clause D.7.2.2			As specified in clause D.7.2.2		
DL CCA probability for semi-static channel access Note5,7	P_{CCA_DL}		0.9375			0.9375		
DL CCA probability for dynamic channel access Note6,7	$P_{CCA_DL_1}$		0.75			0.75		
	$P_{CCA_DL_2}$		0.75			0.75		
UL CCA probability for semi-static channel access	P_{CCA_UL}		0.87			0.87		
UL CCA probability	P_{CCA_UL}		0.75			0.75		
L_{CCA_DL} Note 8			2			2		
W_{CCA_DL} Note 8		ms	$T_{activation_time_withCCA}$			$T_{activation_time_withCCA}$		
Initial downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Initial uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
Dedicated downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Dedicated uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
TCI state			TCI.State.0			TCI.State.0		
TRS Configuration	Config 1		TRS.1.2 TDD			TRS.1.2 TDD		
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA			SR.1.1 CCA		
Dedicated CORESET parameters	Config 1		CCR.1.3 CCA			SR.1.1 CCA		
RMSI CORESET parameters	Config 1		CR.1.1 CCA			SR.1.1 CCA		
OCNG Patterns Note1			OP.1			OP.1		
SSB Configuration for semi-static channel access Note5,7	Config 1		SSB.1 CCA			SSB.1 CCA		
SSB Configuration for dynamic channel access Note6,7	Config 1		SSB.2 CCA			SSB.2 CCA		
SMTC configuration			SMTC.1			SMTC.1		
EPRE ratio of PSS to SSS		dB	0			0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS Note1								

EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	Config 1	dBm/15kHz	-104	-104
N_{oc} Note2	Config 1	dBm/SCS	-101	-101
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
SS-RSRP Note3	Config 1	dBm/SCS	-84	-84
Io Note3	Config 1	dBm/ 38.16MHz	-52.87	-52.87
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that resources in the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8: As specified in TS 38.133 [6] clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [8] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+$T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA} = T_{FirstSSB_MAX} + (1 + L_{3,1})*T_{SMTC_MAX} + (2 + L_{3,2})*T_{rs}$ + 5ms, as specified in 38.133 [6] clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in 38.133 [6] clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB_MAX} + L_{3,1}* T_{SMTC_MAX}$.

During T3, interruption on PCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PCell shall not be more than specified for SA in 38.133 [6] clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

11.4.4 Beam failure detection and link recovery procedures

11.4.4.0 General

Same as in clause 10.3.4.0.

11.4.4.0.1 Minimum conformance requirements for SSB based Beam Failure Detection under CCA

Same as in clause 10.3.4.0.1.

11.4.4.0.1.1 Minimum requirement for SSB based Beam Failure Detection under CCA

Same as in clause 10.3.4.0.1.1.

11.4.4.0.1.2 Measurement restriction for SSB based Beam Failure Detection under CCA

Same as in clause 10.3.4.0.1.2.

11.4.4.0.2 Void

Same as in clause 10.3.4.0.2.

11.4.4.0.3 Scheduling availability of UE during beam failure detection under CCA

Same as in clause 10.3.4.0.3.

11.4.4.0.3.1 Scheduling availability of UE performing beam failure detection under CCA with a same subcarrier spacing as PDSCH/PDCCH

Same as in clause 10.3.4.0.3.1.

11.4.4.0.4 Scheduling availability of UE during candidate beam detection under CCA

Same as in clause 10.3.4.0.4.

11.4.4.0.4.1 Scheduling availability of UE performing L1-RSRP measurement under CCA with a same subcarrier spacing as PDSCH/PDCCH on FR1

Same as in clause 10.3.4.0.4.1.

11.4.4.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA

11.4.4.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 11.4.4.0.1.

11.4.4.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting UL and SSB-based RLM and link recovery on shared channel access.

11.4.4.1.3 Minimum conformance requirement

The minimum requirements are specified in clause 11.4.4.0.1. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.11.4.4.1.

11.4.4.1.4 Test description

The test parameters are given in Tables 11.4.4.1.4.1-3 and 11.4.4.1.5-1 below. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 11.4.4.1.4-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure 11.4.4.1.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

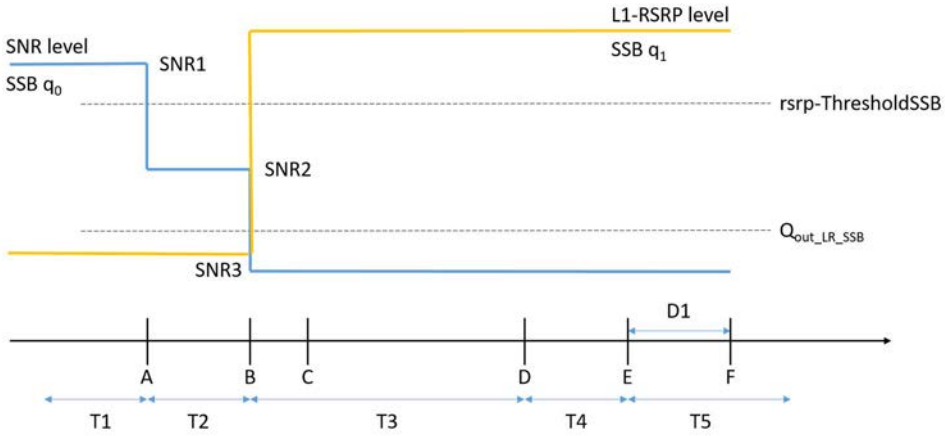

Figure 11.4.4.1.4-1: SNR variation for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA

11.4.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.4.4.1.4.1-1.

Table 11.4.4.1.4.1-1: Supported test configurations for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA

Configuration	Description
11.4.4.1-1	TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Configure the test equipment and the DUT according to the parameters in Table 11.4.4.1.4.1-2.

Table 11.4.4.1.4.1-2: Initial conditions for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 11.4.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 11.4.4.1.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 11.4.4.1.4.1-3.

Table 11.4.4.1.4.1-3: General test parameters for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA

Parameter	Unit	Value	Comment
		Test 1	
Active PSCell		Cell 1	
RF Channel Number		1	
DL CCA model		As specified in D.7.2.1	

UL CCA model			As specified in D.7.2.2	
Duplex mode	Config 1		TDD	
BWchannel	Config 1	MHz	40: NRB,c = 106	
DL initial BWP configuration	Config 1		DLBWP.0.1	
DL dedicated BWP configuration	Config 1		DLBWP.1.1	
UL initial BWP configuration	Config 1		ULBWP.0.1	
UL dedicated BWP configuration	Config 1		ULBWP.1.1	
TDD Configuration	Config 1		TDDConf.1.1 CCA	
CORESET Reference Channel	Config 1		CR.1.1 CCA	
SSB Configuration	Config 1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access	
DBT Window Configuration	Config 1		DBT.1	
PDSCH/PDCCH subcarrier spacing	Config 1		30 KHz	
PRACH Configuration	Config 1		Table A.7.1A.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1	dBm/ SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS

beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the UE shall be fully synchronized to cell 1
T2		s	0.93	
T3		s	0.52	
T4		s	0	
T5		s	0.45	
D1		s	0.41	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

11.4.4.1.4.2 Test Procedure

There is one cell, cell 1 which is the active cell, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA mode. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40 ms) in test 1. The CCA model (both DL and UL) is disabled (i.e. PCCA_DL_i= PCCA_UL=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. The SS sends an *RRCReconfiguration* message to the UE to configure inter-frequency measurement with the corresponding gap pattern and periodic CSI reporting.

3. The UE sends an *RRCReconfigurationComplete* message.

4. Set the parameters of NR Cell according to T1 in Table 11.4.4.1.5-1. Propagation conditions are set according to clause C.2.3. The SS shall enable DL and UL CCA model according to Table 11.4.4.1.5-1. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 11.4.4.1.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 11.4.4.1.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 11.4.4.1.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 11.4.4.1.5-1. T5 starts.

9. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according to CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect preamble on a beam associated with the candidate beam set q_1 before time point B; and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5), the number of successful tests is increased by one. Proceed with step 10.

Otherwise, the number of failed tests is increased by one. Switch off and then on the UE and proceed with step 1.

10. Repeat steps 2-9 for all subtests until the confidence level according to Annex G clause G.2.7 is achieved.

11.4.4.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 11.4.4.1.4.3-1: Common Exception messages for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-6 with conditions gapUE and BFD Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.5-4 Table H.3.5-9 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 11.4.4.1.4.3-2: PDCCH *Search Space* for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 11.4.4.1.4.3-3: *RLF-TimersAndConstants* for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms1000		

n310	n2		
}			

Table 11.4.4.1.4.3-4: *PDCCH-Config* for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 11.4.4.1.4.3-5: *ControlResourceSet* for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

11.4.4.1.5 Test Requirement

Table 11.4.4.1.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA.

Table 11.4.4.1.5-1: Cell-specific test parameters for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode under CCA

Parameter		**Unit**	**Test 1**				
			T1	**T2**	**T3**	**T4**	**T5**
DL CCA probability $P_{CCA,DL}$	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability $P_{CCA,UL}$			1.0	1.0	1.0	1.0	1.0
L_{CCA_DL}			N/A	7			
W_{CCA_DL}		ms	N/A	$T_{Evaluate_CBD_SSB_CCA}$ Note 13			
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					

EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q_1	Config 1	dB	-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_1	Config 1	dBm/SCS kHz	-105.2	-105.2	-84.8	-84.8	-84.8
N_{oc}	Config 1	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio the transmitted SSS REs during DBT window.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 11.4.4.1.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4A.
Note 10: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 11: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 12: For UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.
Note 13: As defined in TS 38.133 [6] Table 8.5A.5.2-1.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 410 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

11.4.4.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA

11.4.4.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 11.4.4.0.

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 11.4.4.0.

11.4.4.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting UL and SSB-based RLM and link recovery on shared channel access.

11.4.4.2.3 Minimum conformance requirement

The minimum requirements are specified in clause 11.4.4.0. DRX configuration is not used for this test.

The normative reference for this requirement is TS 38.133 [6] clause A.11.4.4.2.

11.4.4.2.4 Test description

The test parameters are given in Tables 11.4.4.2.4.1-3 and 11.4.4.2.5-1 below. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 11.4.4.2.4-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure 11.4.4.2.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

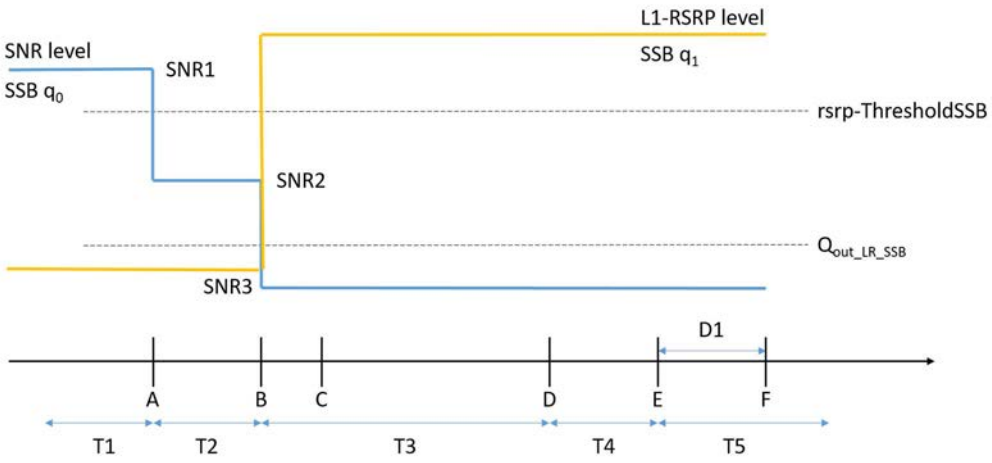

Figure 11.4.4.2.4-1: SNR variation for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA

11.4.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.4.4.2.4.1-1.

Table 11.4.4.2.4.1-1: Supported test configurations for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA

Configuration	Description
11.4.4.2-1	TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Configure the test equipment and the DUT according to the parameters in Table 11.4.4.2.4.1-2.

Table 11.4.4.2.4.1-2: Initial conditions for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 11.4.4.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. Message contents are defined in clause 11.4.4.2.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 11.4.4.2.4.1-3.

Table 11.4.4.2.4.1-3: General test parameters for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
DL CCA model			As specified in D.7.2.1	
UL CCA model			As specified in D.7.2.2	
Duplex mode	Config 1		TDD	
BWchannel	Config 1	MHz	40: NRB,c = 106	
DL initial BWP configuration	Config 1		DLBWP.0.1	
DL dedicated BWP configuration	Config 1		DLBWP.1.1	
UL initial BWP configuration	Config 1		ULBWP.0.1	
UL dedicated BWP configuration	Config 1		ULBWP.1.1	
TDD Configuration	Config 1		TDDConf.1.1 CCA	
CORESET Reference Channel	Config 1		CR.1.1 CCA	
SSB Configuration	Config 1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access	

DBT Window Configuration	Config 1		DBT.1	
PDSCH/PDCCH subcarrier spacing	Config 1		30 KHz	
PRACH Configuration	Config 1		Table A.7.1A.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	
Gap pattern ID			N.A.	
gapOffset			N.A.	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1	dBm/ SCS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	9.01	
T3		s	5.16	
T4		s	0	
T5		s	3.89	
D1		s	3.85	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

11.4.4.2.4.2 Test Procedure

There is one cell, cell 1 which is the active cell, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA mode. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test. The CCA model (both DL and UL) is disabled (i.e. PCCA_DL_i= PCCA_UL=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. The SS sends an *RRCReconfiguration* message to the UE to configure DRX and periodic CSI reporting.
3. The UE sends an *RRCReconfigurationComplete* message.
4. Set the parameters of NR Cell according to T1 in Table 11.4.4.2.5-1. Propagation conditions are set according to clause C.2.3. The SS shall enable DL and UL CCA model according to Table 11.4.4.2.5-1. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 11.4.4.2.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 11.4.4.2.5-1. T3 starts.
7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 11.4.4.2.5-1. T4 starts.
8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 11.4.4.2.5-1. T5 starts.
9. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according to CSI reporting on PUCCH) during the period from time point A to time point B; and

   b) does not detect preamble on a beam associated with the candidate beam set q_1 before time point B; and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5), the number of successful tests is increased by one. Proceed with step 10.

   Otherwise, the number of failed tests is increased by one. Switch off and then on the UE and proceed with step 1.

10. Repeat steps 2-9 for all subtests until the confidence level according to Annex G clause G.2.7 is achieved.

11.4.4.2.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 11.4.4.2.4.3-1: Common Exception messages for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.5-4 Table H.3.5-9 Table H.3.7-1 with Condition DRX.7 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 11.4.4.2.4.3-2: PDCCH *Search Space* for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	3	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbols 0 and 1	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 11.4.4.2.4.3-3: *RLF-TimersAndConstants* for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms1000		
n310	n2		
}			

Table 11.4.4.2.4.3-4: *PDCCH-Config* for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 11.4.4.2.4.3-5: *ControlResourceSet* for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

11.4.4.2.5 Test Requirement

Table 11.4.4.2.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA.

Table 11.4.4.2.5-1: Cell-specific test parameters for NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode under CCA

Parameter		**Unit**	**Test 1**				
			T1	**T2**	**T3**	**T4**	**T5**
DL CCA probability $P_{CCA,DL}$	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability $P_{CCA,UL}$			1.0	1.0	1.0	1.0	1.0
L_{CCA_DL}			N/A	7			
W_{CCA_DL}		ms	N/A	$T_{Evaluate_CBD_SSB_CCA}$ Note 13			
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q_1	Config 1	dB	-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_1	Config 1	dBm/SCS kHz	-105.2	-105.2	-84.8	-84.8	-84.8
N_{oc}	Config 1	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio the transmitted SSS REs during DBT window.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 11.4.4.2.4-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause D.4A.
Note 10:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 11:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.
Note 12:	For UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel occupancy only.
Note 13:	As defined in TS 38.133 [6] Table 8.5A.5.2-1.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 410 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

11.4.5 Active BWP switching

11.4.5.1 NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

11.4.5.1.1 Test purpose

The purpose of this test is to verify the UL BWP switch delay requirement defined in 38.133 [6] clause 8.6.4.

11.4.5.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U, RRM measurements and UL with a shared spectrum NR carrier, BWP adaptation of at least 2BWPs, DCI and timer-based active BWP switching delay Type1 or Type2 on shared channel access, and UL LBT detection and recovery.

11.4.5.1.3 Minimum conformance requirements

Upon detection of consistent UL CCA failure is slot#n in PCell when UE detects *lbt-FailureInstanceMaxCount* number of CCA failure within *lbt-FailureDetectionTimer*, the UE shall switch the active UL BWP to an UL BWP configured with PRACH occasion and for which consistent CCA failure has not been triggered as defined in TS 38.321 [12] clause

5.21. The UE shall be ready to transmit PRACH on the new UL BWP of the PCell on the first UL slot occurs right after slot $n+T_{BWPswitchDelay}$ +1, where $T_{BWPswitchDelay}$ is defined in 38.133 [6] Table 8.6.2-1. The UE shall finish the UL BWP switch within the time duration $T_{BWPswitchDelay}$ depending on UE capability *bwp-SwitchingDelay* [13].

Note: Additional delay in acquiring the first available RACH occasion will be derived in a way similar to that in handover in 38.133 [6] clause 6.1B.1.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ on the PCell in the UL BWP switch. The UE is not required to follow the requirements defined in this clause when performing a UL BWP switch between the UL BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

The normative reference for this requirement is TS 38.133 [6] clause 8.6.4.

11.4.5.1.4 Test description

The test scenario comprises of one NR PCell (Cell 1) as given in 11.4.5.1.4.1-3. Cell-specific parameters of NR PCell are specified in Table 11.4.5.1.5-1. SRS configuration used in the test is specified in Table 11.4.5.1.5-2.

The UE shall be configured with PRACH configuration on UL BWP on which the UE shall switch after the consistent UL LBT failure detection.

The test consists of 2 successive time periods, with durations of T1 and T2, respectively.

During T1,

- Time period T1 starts when the UE has received the SRS configuration for periodic SRS transmission on active UL BWP-1.
- The UE shall perform UL CCA before SRS transmission.
- The parameter UL CCA probability P_{CCA} is set to 0 during T1. This requires the test system to set energy level above the detection level during portion of the UL slot where the UE performs UL CCA. This in turn forces the UE to fail the UL CCA. The UE consistently fails UL CCA during T1 and is therefore unable to transmit SRS.

During T2,

- T2 starts when the UE detects consistent UL LBT failures i.e. when total number of UL LBT failures in cell1 on active UL BWP-1 exceeds *lbt-FailureInstanceMaxCount* during *lbt-FailureDetectionTimer*.
- The UE upon detected consistent UL LBT failure starts the LBT recovery mechanism, which requires the UE to switch to active UL BWP-2 in Cell 1 and to send PRACH in the active UL BWP-2.
- Staring from T2, the UE shall be able to send PRACH in the active UL BWP-2 within the delay specified in 38.133 [6] clause 8.6.4.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.4.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.4.5.1.4.1-1.

Table 11.4.5.1.4.1-1: Supported test configurations for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

Config	Description
11.4.5.1-1	With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz

Configure the test equipment and the DUT according to the parameters in Table 11.4.5.1.4.1-2.

Table 11.4.5.1.4.1-2: Initial conditions for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.4.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable Ues without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.4.5.1.4.1-3.

2. Message contents are defined in clause 11.4.5.1.4.3.

3. The test scenario comprises of one NR PCell (Cell 1) with CCA transmitting SSBs in DBT windows according to DL CCA model. The power levels and settings for Cell 1 are configured according to clause C.1.2 and C.1.3.

4. Before the test starts:

   - UE is connected to Cell 1 on radio channel 1.

   - UE is configured with 2 different UE-specific downlink and uplink bandwidth parts: DL BWP-1, DL BWP-2, UL BWP-1 and UL BWP-2 before starting the test. DL BWP-1 and DL BWP-2 always include bandwidth of the initial DL BWP and SSB. UL BWP-1 and UL BWP-2 always include bandwidth of the SRS.

   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is DL BWP-1.

   - UE is indicated in *firstActiveUplinkBWP-Id* that the active UL BWP is UL BWP-1.

   - UE is configured with *LBT-FailureRecoveryConfig* parameters for Cell 1.

All cells have constant signal levels throughout the test.

Table 11.4.5.1.4.1-3: General test parameters for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Pcell		Cell 1	Pcell on RF channel number 1.
CP length		Normal	
DRX		OFF	
lbt-FailureDetectionTimer	ms	80	Parameter configured by IE: *LBT-FailureRecoveryConfig* [13]
lbt-FailureInstanceMaxCount		4	Parameter configured by IE: *LBT-FailureRecoveryConfig* [13]
T1	s	0.1	During T1 consistent LBT failure is detected on active UL BWP-1
T2	s	0.1	During T2 UE sends PRACH on active UL BWP-2

11.4.5.1.4.2 Test procedure

Cell 1 has constant signal level throughout the test. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 11.4.5.1.4.1-3 and 11.4.5.1-5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures 2 different UE-specific bandwidth

parts, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, and as the active UL BWP using *firstActiveUplinkBWP-Id* according to Table 11.4.5.1.4.3-2. UE is configured with *LBT-FailureRecoverConfig* parameters for Cell 2 according to Table 11.4.5.1.4.3-5, PRACH configuration on UL BWP-2 according to Table 11.4.5.1.4.3-4 and periodic SRS transmissions on UL BWP-1 according to Tables 11.4.5.1.4.3-4 and 11.4.5.1.5-2.

4. The UE shall transmit an *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.4.5.1.5-1. T1 starts.

5. During T1 the UE shall perform UL CCA before each SRS transmission. The parameter UL CCA probability P_{CCA} is set to 0 during T1. This requires the test system to set energy level above the detection level during portion of the UL slot where the UE performs UL CCA. This in turn forces the UE to fail the UL CCA. The UE consistently fails UL CCA during T1 and is therefore unable to transmit SRS.

6. When T1 expires T2 starts. The SS shall change the UL CCA probability P_{CCA} to 1 during T2. This will make the SS to not occupy the channel anymore.

7. The UE shall attempt to recover the link by transmitting PRACH on UL BWP-2. If the UE transmits PRACH on UL BWP-2 within 21.5ms from the start of T2 (for UE capable of *bwp-SwitchingDelay type1*) or within 23ms from the start of T2 (for UE capable of *bwp-SwitchingDelay type2*), then the number of successful tests is increased by one. If the UE does not transmit PRACH on UL BWP-2 during the required time, the number of failures is increased by one.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1), then send an *RRCRelease* message to release the PCell, then the UE is switched OFF/ON, then proceed with step 1.

9. Repeat steps 2-8 for until the confidence level according to Annex G clause G.2.7 is achieved.

11.4.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.4.5.1.4.3-1: Common Exception messages for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 11.4.5.1.4.3-1A: *RRCReconfiguration* (Step3) for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 11.4.5.1.4.3-1B	
}			
}			
}			

Table 11.4.5.1.4.3-1B: *CellGroupConfig* (Table 11.4.5.1.4.3-1A) for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**

CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PCell		
spCellConfigDedicated	ServingCellConfig	Table 11.4.5.1.4.3-2	
}			
}			

Table 11.4.5.1.4.3-2: *ServingCellConfig* (Table 11.4.5.1.4.3-1B) for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 11.4.5.1.4.3-3	BWP1
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 11.4.5.1.4.3-3	BWP2
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 11.4.5.1.4.3-4	BWP1
BWP-Uplink[2]	BWP-Uplink with condition BWP2	entry 2 Table 11.4.5.1.4.3-4	BWP2
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 11.4.5.1.4.3-3: *BWP-Downlink* (Table 11.4.5.1.4.3-2) for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**

BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
}			
}			

Table 11.4.5.1.4.3-4: *BWP-Uplink* (Table 11.4.5.1.4.3-2) for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3	BWP-2	BWP2
rach-ConfigCommon CHOICE {			
setup	RACH-ConfigCommon	Table A.7.1A.1-1	BWP2
}			
}			
bwp-Dedicated SEQUENCE {			
srs-Config CHOICE {			BWP1
setup	SRS-Config	Table 11.4.5.1.5-2	
}			
lbt-FailureRecoveryConfig-r16 CHOICE {			BWP2
setup	LBT-FailureRecoveryConfig-r16	Table 11.4.5.1.4.3-5	
}			
}			
}			

Table 11.4.5.1.4.3-5: *LBT-FailureRecoveryConfig* for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA DC

Derivation Path: TS 38.508-1 [14], Table 4.6.3-64A			
Information Element	**Value/remark**	**Comment**	**Condition**
LBT-FailureRecoveryConfig-r16 ::= SEQUENCE {			
lbt-FailureInstanceMaxCount-r16	n4		
lbt-FailureDetectionTimer-r16	ms80		
}			

11.4.5.1.5 Test requirements

Tables 11.4.5.1.5-1 and 11.4.5.1.5-2 define the primary level settings including test tolerances for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA.

Table 11.4.5.1.5-1: NR Cell specific test parameters for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

Parameter		Unit	Cell 1	
			T1	T2
TDD configuration	Config 1, 2		TDDConf.1.1 CCA	
$BW_{channel}$	Config 1, 2		40 MHz: $N_{RB,c}$ = 106	

DL CCA model		Config 1, 2		As specified in clause D.7.2.1	
UL CCA model		Config 1, 2		As specified in clause D.7.2.2	
Active BWP ID		Config 1, 2		1, 2	
Initial DL BWP Configuration		Config 1, 2		DLBWP.0.2 Note 4	
Active DL BWP-1 Configuration		Config 1, 2		DLBWP.1.1 Note 4	
Active DL BWP-2 Configuration		Config 1, 2		DLBWP.1.3 Note 4	
Initial UL BWP Configuration		Config 1, 2		ULBWP.0.2 Note 4	
Active UL BWP-1 Configuration		Config 1, 2		ULBWP.1.1 Note 4	
Active UL BWP-2 Configuration		Config 1, 2		ULBWP.1.3 Note 4	
PDSCH Reference measurement channel		Config 1, 2		SR.1.1 CCA	
RMSI CORESET parameters		Config 1, 2		CR.1.1 CCA	
Dedicated CORESET parameters		Config 1, 2		CCR.1.1 CCA	
OCNG Patterns		Config 1, 2		OP.1	
SSB Configuration	Semi- static channel access	Config 1, 2		SSB.1 CCA	
	Dynamic channel access	Config 1, 2		SSB.2 CCA	
SMTC Configuration		Config 1, 2		SMTC.1 FR1	
Correlation Matrix and Antenna Configuration		Config 1, 2		1x2 Low	
TRS Configuration		Config 1, 2		TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1, 2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1, 2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1, 2		1	1
UL CCA probability (P_{CCA_UL})		Config 1, 2		0	1
PRACH configuration		Config 1, 2		N/A	Table A.7.1A.1-1
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note 2		Config 1, 2	dBm/SCS	-101	
SS-RSRP Note 3		Config 1, 2	dBm/SCS	-84	
$\hat{E}_s/I_{ot}$		Config 1, 2	dB	17	
$\hat{E}_s/N_{oc}$		Config 1, 2	dB	17	
Io Note3		Config 1, 2	dBm/ 38.16MHz	-52.86	
Propagation Condition				AWGN	

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].

Note 5: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in section D.7.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.4.5.1.5-2: Sounding Reference Symbol Configuration for NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

Field	Value	Comment
c-SRS	24	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [13].		

The UE capable of *bwp-SwitchingDelay type1* [13] shall start to transmit the PRACH on active UL BWP-2 of Cell 2 (PCell) less than 21.5 ms from the beginning of time period T1.

The UE capable of *bwp-SwitchingDelay type2* [13] shall start to transmit the PRACH on active UL BWP-2 of Cell 2 (PCell) less than 23 ms from the beginning of time period T1.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The above delay is calculated as follows:

The active UL BWP switch delay from UL BWP-1 to UL BWP-2 can be expressed as:

$$T_{BWPswitchDelay} * T_{slot} + 1 * T_{slot} + (1 + L_3) * T_{SSB,RO} + 10 \text{ ms}$$

Where:

- $T_{BWPswitchDelay}$ = 1 ms (2 slots) and 2.5 ms (5 slots) for *bwp-SwitchingDelay* [13] *type1* and *type2* UE capabilities according to 38.133 [6] clause 8.6.4.
- T_{slot} = It is the slot length. It is 0.5 ms for 30 kHz.
- L3 = It is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. L3= 0 during T2 since $P_{CCA} = 1$.
- $T_{SSB,RO}$ = 10 ms according to FR1 PRACH configuration 1.

This gives a total of 21.5 ms and 23 ms for *type1* and *type2* UE respectively.

11.4.5.2 DCI-based and Timer-based Active BWP Switch

11.4.5.2.0 Minimum conformance requirements

11.4.5.2.0.1 Minimum conformance requirements for DCI-based and timer-based active BWP switch

Same as section 10.3.5.2.0.1.

11.4.5.2.0.2 Minimum conformance requirements for Interruptions due to Active BWP switching

The requirements for DCI-based BWP switch, timer-based BWP switch or UL BWP switch triggered by consistent uplink CCA failures in this clause apply to the case that the BWP switch is performed on a single CC or multiple CCs.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this clause apply for each BWP switch. Further, the requirements in this clause are applicable to UE capable of independent beam management in FR2 inter-band CA and UE capable of FR2 intra-band CA and FR1.

When UE receives a DCI indicating UE to switch its active BWP involving changes in any of the parameters listed in Table 11.4.5.2.0.2-2, the UE is allowed to cause interruption of up to X slot to other active serving cells if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 11.4.5.2.0.2-2 and the UE is capable of per-FR gap the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 11.4.5.2.0.2-1. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in 38.133 [6] clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ +Y as defined in 38.133 [6] clause 8.6.2A.1 when BWP switch occurs on multiple CCs. Interruptions are not allowed during BWP switch involving any other parameter change.

When a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [13] expires, UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 11.4.5.2.0.2-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 11.4.5.2.0.2-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 11.4.5.2.0.2-1. The starting time of interruption is only allowed within the BWP switching delay $T_{BWPswitchDelay}$ as defined in 38.133 [6] clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{MultipleBWPswitchDelay}$ as defined in 38.133 [6] clause 8.6.2B.1 when BWP switch occurs on multiple CCs simultaneously or $T_{MultipleBWPswitchDelayTotal}$ as defined in 38.133 [6] clause 8.6.2B.2 when BWP switch occurs on multiple CCs over partially overlapping time period. Interruptions are not allowed during BWP switch involving any other parameter change.

When UE receives an RRC reconfiguration that only requests UE to switch its active BWP on one single CC, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 11.4.5.2.0.2-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 11.4.5.2.0.2-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 11.4.5.2.0.2-1. The interruption is only allowed within the delay $T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$ defined in 38.133 [6] clause 8.6.3 when BWP switch occurs on a single CC. The interruption is only allowed within the delay $T_{RRCprocessingDelay}$ + $T_{BWPswitchDelayRRC}$ + D_{RRC}*(N-1) as defined in 38.133 [6] clause 8.6.3A when BWP switch occurs on multiple CCs.

When UL BWP switch is triggered by consistent uplink CCA failures [12], UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active UL BWP involving changes in any of the parameters listed in Table 11.4.5.2.0.2-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the UL BWP switch imposes changes in any of the parameters listed in Table 11.4.5.2.0.2-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing UL BWP switching. X is defined in Table 11.4.5.2.0.2-1. The starting time of interruption is only allowed within the UL BWP switching delay $T_{BWPswitchDelay}$ as defined in 38.133 [6] clause 8.6.2. Interruptions are not allowed during BWP switch involving other parameter change.

Table 11.4.5.2.0.2-1: Interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5
5	0.03125	17
6	0.015625	33

Note1: void

Table 11.4.5.2.0.2-2: Parameters which cause interruption other than SCS

Parameters	Comment
locationAndBandwidth	From TS 38.331 [13]
nrofSRS-Ports	
maxMIMO-Layers-r16	

The normative reference for this requirement is TS 38.133 [6] clause 8.2.2.2.5.

11.4.5.2.1 NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

11.4.5.2.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay and interruption requirements on other active serving cell defined in clause 11.4.5.2.0.

11.4.5.2.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U, RRM measurements and UL with a shared spectrum NR carrier, BWP adaptation of at least 2BWPs, DCI and timer-based active BWP switching delay Type1 or Type2 on shared channel access and 2 DL CA.

11.4.5.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.4.5.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.11.4.5.2.1.

11.4.5.2.1.4 Test description

The test scenario comprises of one PCell (Cell 1) and one SCell (Cell 2) as given in Table 11.4.5.2.4.1-3. NR Cell-specific parameters are specified in Table 11.4.5.2.1.5-1 below.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of PCell's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 11.4.5.2.0 and starts to report valid ACK/NACK for the PCell no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PCell's BWP-2 no later than the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).
>
> The starting time of SCell (Cell 2) interruption due to BWP switch on PCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PCell (Cell 1).

During T3,

> The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of PCell's slot ($j+T_{BWPswitchDelay}$) as defined in clause 11.4.5.2.0 and starts to report valid ACK/NACK for the SCell at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on PCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The starting time of SCell (Cell 2) interruption due to BWP switch of PCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to SCell is carried out in the correct time span by monitoring ACK/NACK sent in SCell during BWP switch of PCell, respectively.

11.4.5.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.4.5.2.1.4.1-1.

Table 11.4.5.2.1.4.1-1: Supported test configurations for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Config	Description
11.4.5.2.1-1	With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE supporting SA operation with only NR band(s) with shared spectrum access is required to be tested.	

Configure the test equipment and the DUT according to the parameters in Table 11.4.5.2.1.4.1-2.

Table 11.4.5.2.1.4.1-2: Initial conditions for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.4.5.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.4.5.2.1.4.1-3.
2. Message contents are defined in clause 11.4.5.2.1.4.3.
3. The test scenario comprises of two NR Cells, PCell (Cell 1) and SCell (Cell 2), both with CCA transmitting SSBs in DBT windows according to DL CCA model. The power levels and settings for Cell 1 and Cell 2 is configured according to clause C.1.2 and C.1.3.
4. Before the test starts:
   - UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).
   - UE is configured with 2 different UE-specific downlink bandwidth parts for PCell, BWP-1 and BWP-2, in Cell 1 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
   - UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for SCell, BWP-0 in Cell 2 before starting the test.
   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.

- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in SCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PCell.

All cells have constant signal levels throughout the test.

Table 11.4.5.2.1.4.1-3: General test parameters for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used in this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
DL CCA model		As specified in clause D.7.2.1	
UL CCA model		As specified in clause D.7.2.2	
bwp-InactivityTimer	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3	Time alignment error as specified in TS 38.104 [28] clause 6.5.3.1.
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

11.4.5.2.1.4.2 Test procedure

The test consists of three successive time periods, with durations of T1, T2, and T3, respectively. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

All cells have constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Tables 11.4.5.2.1.4.1-3 and 11.4.5.2.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.
3. The SS shall transmit an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures 2 different UE-specific bandwidth parts, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to Table 11.4.5.2.1.4.3-2. UE is configured with a *bwp-InactivityTimer* timer value for PCell.
4. The UE shall transmit an *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.4.5.2.1.5-1.
5. The SS shall send a DCI format 1_1 command for PCell DL BWP switch.
6. The UE shall receive the DCI format 1_1 command in PCell's slot # denoted i, then T1 starts and the UE switch its bandwidth part from BWP-1 to BWP-2:
   a) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot (i+$T_{BWPswitchDelay}$+k_1); and

b) During the BWP switch delay interval checked in a), if the number of consecutive missing ACK/NACK for SCell is no more than 1 (based on Table 11.4.5.2.0.2-1).

Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

7. Once the UE sends valid ACK/NACK for the PCell on BWP-2, T2 starts. During T2, the SS shall not transmit DCI format for PDSCH reception on PCell.

8. T3 starts from the first slot #j of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires and the SS restarts to send DCI format for PDSCH reception on PCell. Then, the UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part, BWP-1 on PCell:

   a) If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot (j+$T_{BWPswitchDelay}$+k_1); and

   b) During the BWP switch delay interval checked in a), if the number of consecutive missing ACK/NACK for SCell is no more than 1 (based on Table 11.4.5.2.0.2-1).

   Then, the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).

9. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1), then send an *RRCRelease* message to release the PCell, then the UE is switched OFF/ON, then proceed with step 1.

10. Repeat steps 5-9 until the confidence level according to Annex G clause G.2.7 is achieved.

If all subtests pass, the test passes. If one subtest fails, the test fails.

11.4.5.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.4.5.2.1.4.3-1: Common Exception messages for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 11.4.5.2.1.4.3-1A: *RRCReconfiguration* (Step3) for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 11.4.5.2.1.4.3-1B	
}			
}			
}			

Table 11.4.5.2.1.4.3-1B: *CellGroupConfig* (Table 11.4.5.2.1.4.3-1A) for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**

CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PCell		
spCellConfigDedicated	ServingCellConfig	Table 11.4.5.2.1.4.3-2	
}			
}			

Table 11.4.5.2.1.4.3-2: *ServingCellConfig* (Table 11.4.5.2.1.4.3-1B) for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 11.4.5.2.1.4.3-3	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 11.4.5.2.1.4.3-3	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 11.4.5.2.1.4.3-4	
BWP-Uplink[2]	BWP-Uplink with condition BWP2	entry 2 Table 11.4.5.2.1.4.3-4	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 11.4.5.2.1.4.3-3: *BWP-Downlink* (Table 11.4.5.2.1.4.3-2) for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 11.4.5.2.1.4.3-6	
}			
}			
}			

Table 11.4.5.2.1.4.3-4: *BWP-Uplink* (Table 11.4.5.2.1.4.3-2) for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3	BWP-2	BWP2
}			
}			

Table 11.4.5.2.1.4.3-5: *PDSCH-TimeDomainResourceAllocationList* (Table 11.4.5.2.1.4.3-6) for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
k0	$T_{BWPswitchDelay}$	Defined in Table 11.4.5.2.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 11.4.5.2.1.4.3-6: *PDSCH-ConfigCommon* (Table 11.4.5.2.1.4.3-3) for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 11.4.5.2.1.4.3-5	
}			

11.4.5.2.1.5 Test requirements

Tables 11.4.5.2.1.4.1-3 and 11.4.5.2.1.5-1 define the primary level settings including test tolerances for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA.

Table 11.4.5.2.1.5-1: NR Cell specific test parameters for NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA

Parameter			Unit	Cell 1	Cell2
Frequency Range				FR1	
Duplex mode		Config 1		TDD	
TDD configuration		Config 1		TDDConf.1.1 CCA	
$BW_{channel}$		Config 1		40 MHz: $N_{RB,c}$ = 106	
Active BWP ID				1, 2	0
Initial DL BWP Configuration				DLBWP.0.2[Note4]	
Initial UL BWP Configuration				ULBWP.0.2[Note4]	
Active DL BWP-0 Configuration				N.A.	DLBWP.0.2[Note4]
Active DL BWP-1 Configuration				DLBWP.1.1[Note4]	N.A.
Active DL BWP-2 Configuration				DLBWP.1.3[Note4]	N.A.
Active UL BWP-0 Configuration				N.A.	ULBWP.0.2[Note4]
Active UL BWP-1 Configuration				ULBWP.1.1[Note4]	N.A.
Active UL BWP-2 Configuration				ULBWP.1.3[Note4]	N.A.
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA	
RMSI CORESET parameters		Config 1		CR.1.1 CCA	
Dedicated CORESET parameters		Config 1		CCR.1.3 CCA	
OCNG Patterns				OP.1	
SSB Configuration	Semi- static channel access	Config 1		SSB.1 CCA	
	Dynamic channel access	Config 1		SSB.2 CCA	
SMTC Configuration		Config 1		SMTC.1	
DL CCA probability (P_{CCA_DL})		Config 1		1	1

UL CCA probability (P_{CCA_UL})	Config 1		1	1
Correlation Matrix and Antenna Configuration			1x2 Low	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2	Config 1	dBm/SCS	-101	-101
SS-RSRP Note 3	Config 1	dBm/SCS	-84	-84
$\hat{E}_s/I_{ot}$	Config 1	dB	17	17
$\hat{E}_s/N_{oc}$	Config 1	dB	17	17
Io Note3	Config 1	dBm/38.16MHz	-52.86	-52.86
Propagation Condition			AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3 SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [12].

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in 38.133 [6] Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of SCell interruption during PCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in clause 11.4.5.2.0.2.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first DL slot that occurs after the beginning of DL slot ($i+ T_{BWPswitchDelay}+k1$), ($j+ T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

11.4.5.2.2 NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

11.4.5.2.2.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay and interruption requirements on other active serving cell defined in clause 11.4.5.2.0.

11.4.5.2.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U, RRM measurements and UL with a shared spectrum NR carrier, BWP adaptation of at least 2BWPs, DCI and timer-based active BWP switching delay Type1 or Type2 on shared channel access.

11.4.5.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.4.5.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.11.4.5.2.2.

11.4.5.2.2.4 Test description

The test scenario comprises of one PCell (Cell 1) as given in Table 11.4.5.2.4.1-3. NR Cell-specific parameters are specified in Table 11.4.5.2.2.5-1 below.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 11.4.5.2.0 and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

> The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot ($j+T_{BWPswitchDelay}$) as defined in clause 11.4.5.2.0 and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}+k1$). The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

11.4.5.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.4.5.2.2.4.1-1.

Table 11.4.5.2.2.4.1-1: Supported test configurations for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Config	Description
11.4.5.2.2-1	With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: A UE which fulfils the requirements in test case 11.4.5.2.1 can skip test case 11.4.5.2.2. Note 3: The UE supporting SA operation with only NR band(s) with shared spectrum access is required to be tested.	

Configure the test equipment and the DUT according to the parameters in Table 11.4.5.2.2.4.1-2.

Table 11.4.5.2.2.4.1-2: Initial conditions for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.4.5.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.4.5.2.2.4.1-3.
2. Message contents are defined in clause 11.4.5.2.2.4.3.
3. The test scenario comprises of one NR Cell, PCell (Cell 1), under CCA transmitting SSBs in DBT windows according to DL CCA model. The power levels and settings for Cell 1 is configured according to clause C.1.2 and C.1.3.

4. Before the test starts:

   - UE is connected to Cell 1 on radio channel 1.
   - UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
   - UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

The cell has constant signal levels throughout the test.

Table 11.4.5.2.2.4.1-3: General test parameters for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
DL CCA model		As specified in clause D.7.2.1	
UL CCA model		As specified in clause D.7.2.2	
bwp-InactivityTimer	ms	200	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

11.4.5.2.2.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

All cells have constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 11.4.5.2.2.4.1-3 and 11.4.5.2.2.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures 2 different UE-specific bandwidth parts, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to Table 11.4.5.2.2.4.3-2. UE is configured with a *bwp-InactivityTimer* timer value for PCell.

4. The UE shall transmit an *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.4.5.2.2.5-1.

5. The SS shall send a DCI format 1_1 command for PCell DL BWP switch.

6. The UE shall receive the DCI format 1_1 command in PCell's slot # denoted i, then T1 starts and the UE switch its bandwidth part from BWP-1 to BWP-2. If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot ($i+T_{BWPswitchDelay}+k_1$), the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

7. Once the UE sends valid ACK/NACK for the PCell on BWP-2, T2 starts. During T2, the SS shall not transmit DCI format for PDSCH reception on PCell.

8. T3 starts from the first slot #j of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires and the SS restarts to send DCI format for PDSCH reception on PCell. Then, the UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part, BWP-1 on PCell. If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of the DL slot ($j+T_{BWPswitchDelay}+k_1$), the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}= P_{CCA_UL}=1$).

9. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}= P_{CCA_UL}=1$), then send an *RRCRelease* message to release the PCell, then the UE is switched OFF/ON, then proceed with step 1.

10. Repeat steps 5-9 until the confidence level according to Annex G clause G.2.7 is achieved.

If all subtests pass, the test passes. If one subtest fails, the test fails.

11.4.5.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.4.5.2.2.4.3-1: Common Exception messages for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 11.4.5.2.2.4.3-1A: *RRCReconfiguration* (Step3) for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 11.4.5.2.2.4.3-1B	

}			
}			
}			

Table 11.4.5.2.2.4.3-1B: *CellGroupConfig* (Table 11.4.5.2.2.4.3-1A) for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PCell		
spCellConfigDedicated	ServingCellConfig	Table 11.4.5.2.2.4.3-2	
}			
}			

Table 11.4.5.2.2.4.3-2: *ServingCellConfig* (Table 11.4.5.2.2.4.3-1B) for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 11.4.5.2.2.4.3-3	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 11.4.5.2.2.4.3-3	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		

BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 11.4.5.2.2.4.3-4	
BWP-Uplink[2]	BWP-Uplink with condition BWP2	entry 2 Table 11.4.5.2.2.4.3-4	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 11.4.5.2.2.4.3-3: *BWP-Downlink* (Table 11.4.5.2.2.4.3-2) for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 11.4.5.2.2.4.3-6	
}			
}			
}			

Table 11.4.5.2.2.4.3-4: *BWP-Uplink* (Table 11.4.5.2.2.4.3-2) for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3	BWP-2	BWP2
}			
}			

Table 11.4.5.2.2.4.3-5: *PDSCH-TimeDomainResourceAllocationList* (Table 11.4.5.2.2.4.3-6) for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	$T_{BWPswitchDelay}$	Defined in Table 11.4.5.2.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 11.4.5.2.2.4.3-6: *PDSCH-ConfigCommon* (Table 11.4.5.2.2.4.3-3) for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 11.4.5.2.2.4.3-5	
}			

11.4.5.2.2.5 Test requirements

Tables 11.4.5.2.2.4.1-3 and 11.4.5.2.2.5-1 define the primary level settings including test tolerances for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA.

Table 11.4.5.2.2.5-1: NR Cell specific test parameters for NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		TDD
TDD configuration	Config 1		TDDConf.1.1 CCA
$BW_{channel}$	Config 1		40 MHz: $N_{RB,c}$ = 106
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration	Config 1		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration	Config 1		DLBWP.1.3 Note 4
Initial UL BWP Configuration	Config 1		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration	Config 1		ULBWP.1.1 Note 4

Active UL BWP-2 Configuration		Config 1		ULBWP.1.3 Note 4
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA
RMSI CORESET parameters		Config 1		CR.1.1 CCA
Dedicated CORESET parameters		Config 1		CCR.1.3 CCA
OCNG Patterns				OP.1
SSB Configuration	Semi- static channel access	Config 1		SSB.1 CCA
	Dynamic channel access	Config 1		SSB.2 CCA
SMTC Configuration		Config 1		SMTC.1
Correlation Matrix and Antenna Configuration				1x2 Low
TRS Configuration		Config 1		TRS.1.2 TDD
DL CCA probability (P_{CCA_DL})		Config 1		1
UL CCA probability (P_{CCA_UL})		Config 1		1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		Config 1	dBm/SCS	-101
SS-RSRP Note 3		Config 1	dBm/SCS	-84
$\hat{E}_s/I_{ot}$		Config 1	dB	17
$\hat{E}_s/N_{oc}$		Config 1	dB	17
Io Note3		Config 1	dBm/38.16 MHz	-52.86
Propagation Condition				AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].				

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in 38.133 [6] Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

11.4.5.3 RRC-based Active BWP Switch

11.4.5.3.0 Minimum conformance requirements

11.4.5.3.0.1 Minimum conformance requirements for RRC-based active BWP switch

Same as section 10.3.5.3.0.1.

11.4.5.3.1 NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA

11.4.5.3.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch under CCA defined in clause 11.4.5.3.0.1.

11.4.5.3.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U, RRM measurements and UL with a shared spectrum NR carrier, BWP adaptation of at least 2BWPs on shared channel access.

11.4.5.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.4.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.4.5.3.1.

11.4.5.3.1.4 Test description

One cell is deployed in the test, the NR PCell (Cell 1) under CCA transmitting SSBs in DBT windows according to DL CCA model. The test parameters for the cell is given in Table 11.4.5.3.1.4.1-3 and 11.4.5.3.1.5-1 below.

The test consists of 1 time period, with duration of T1.

During T1,

> Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.
>
> The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 11.4.5.3.0.1 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1 on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.
>
> $T_{\text{RRCprocessingDelay}}$ and $T_{\text{BWPswitchDelayRRC}}$ are defined in clause 11.4.5.3.0.1.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a valid ACK/NACK is received is received.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.4.5.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.4.5.3.1.4.1-1.

Table 11.4.5.3.1.4.1-1: Supported test configurations for NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA

Config	Description
11.4.5.3.1-1	With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE supporting SA operation with only NR band(s) with shared spectrum access is required to be tested.	

Configure the test equipment and the DUT according to the parameters in Table 11.4.5.3.1.4.1-2.

Table 11.4.5.3.1.4.1-2: Initial conditions for NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.4.5.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.4.5.3.1.4.1-3.
2. Message contents are defined in clause 11.4.5.3.1.4.3.
3. The test scenario comprises of one NR Cell, PCell (Cell 1), under CCA transmitting SSBs in DBT windows according to DL CCA model. The power levels and settings for Cell 1 is configured according to clause C.1.2 and C.1.3.

4. Before the test starts:

   - UE is connected to Cell 1 on radio channel 1.
   - UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

Table 11.4.5.3.1.4.1-3: General test parameters for NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DL CCA model		As specified in clause D.7.2.1	
UL CCA model		As specified in clause D.7.2.2	
DRX		OFF	
T1	s	0.2	

11.4.5.3.1.4.2 Test procedure

The test consists of 1 time period, with duration of T1. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

All cells have constant signal levels throughout the test:

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, DC bearer *MCG_and_SCG*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 11.4.5.3.1.4.1-3 and 11.4.5.3.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall send an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures another UE-specific bandwidth part, BWP-1, and indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to the initial condition of Active BWP-1 in Table 11.4.5.3.1.5-1.

4. The UE shall transmit an *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.4.5.3.1.5-1.

5. The SS shall send an *RRCReconfiguration* message with updated bandwidth part configuration for PCell DL BWP switch, changing the BWP according to the final condition of Active BWP-1 in Table 11.4.5.3.1.5-1. T1 starts.

6. The UE shall receive the *RRCReconfiguration* in PCell's slot # denoted i and reconfigure its bandwidth part with the updated bandwidth part configuration:

7 If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i+X+k_1$ then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one. Where,

   - X = 52 for test configuration 11.4.5.3.1-1 and 11.4.5.3.1-2;

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1), then send an *RRCRelease* message to release the PCell, then the UE is switched OFF/ON, then proceed with step 1.

9. Repeat steps 2-8 until the confidence level according to Annex G clause G.2.7 is achieved.

11.4.5.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.4.5.3.1.4.3-1: Common Exception messages for NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 11.4.5.3.1.4.3-1A: *RRCReconfiguration* (Step 3, Step 5) for NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			

rrcReconfiguration SEQUENCE {			
secondaryCellGroup	CellGroupConfig	Table 11.4.5.3.1.4.3-1B	
}			
}			
}			

Table 11.4.5.3.1.4.3-1B: *CellGroupConfig* (Table 11.4.5.3.1.4.3-1A) for NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
cellGroupId	1		
spCellConfig SEQUENCE {			
servCellIndex	ServCellIndex of NR PCell		
spCellConfigDedicated	ServingCellConfig	Table 11.4.5.3.1.4.3-1C	
}			
}			

Table 11.4.5.3.1.4.3-1C: *ServingCellConfig* (Table 11.4.5.3.1.4.3-1B) for NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1] SEQUENCE {	BWP-Downlink	entry 1 Table 11.4.5.3.1.4.3-1D	
}			
firstActiveDownlinkBWP-Id	1	BWP-1	
defaultDownlinkBWP-Id	1	BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 11.4.5.3.1.4.3-1E	
}			
firstActiveUplinkBWP-Id	1	BWP-1	

}			
}			

Table 11.4.5.3.1.4.3-1D: *BWP-Downlink* (Table 11.4.5.3.1.4.3-1C) for NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 5
}			
}			

Table 11.4.5.3.1.4.3-1E: *BWP-Uplink* (Table 11.4.5.3.1.4.3-1C) for NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 5
}			
}			

11.4.5.3.1.5 Test requirements

Tables 11.4.5.3.1.4.1-3 and 11.4.5.3.1.5-1 define the primary level settings including test tolerances for NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA.

Table 11.4.5.3.1.5-1: NR Cell specific test parameters for NR SA FR1 RRC-based DL active BWP switch of Cell with non-DRX under CCA

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		TDD
TDD configuration		Config 1		TDDConf.1.1 CCA
$BW_{channel}$		Config 1		40 MHz: $N_{RB,c}$ = 106
Active BWP ID				1
Initial DL BWP Configuration		Config 1		DLBWP.0.2
Initial UL BWP Configuration		Config 1		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1		DLBWP.1.3
	Active UL BWP-1 Configuration	Config 1		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1		ULBWP.1.1
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA
RMSI CORESET parameters		Config 1		CR.1.1 CCA
Dedicated CORESET parameters		Config 1		CCR.1.3 CCA
OCNG Patterns				OP.1
SSB Configuration	Semi-static channel access	Config 1		SSB.1 CCA

Dynamic channel access	Config 1		SSB.2 CCA
SMTC Configuration			SMTC.1
TRS Configuration	Config 1		TRS.1.2 TDD
DL CCA probability (P_{CCA_DL})	Config 1		1
UL CCA probability (P_{CCA_UL})	Config 1		1
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS (Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1	dBm/SCS	-101
SS-RSRP Note 3	Config 1	dBm/SCS	-84
$\hat{E}_s/I_{ot}$	Config 1	dB	17
$\hat{E}_s/N_{oc}$	Config 1	dB	17
Io Note3	Config 1	dBm/38.16MHz	-52.86

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [8].

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the beginning of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where,

$T_{RRCprocessingDelay}$ = 10 ms, is the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [13];

$T_{BWPSwitchDelayRRC}$ = 6 ms, is the time used by the UE to perform BWP switch;

NR slot length = 0.5 ms for SCS = 30kHz.

k1 is the timing between DL data receiving and acknowledgement as specified in [12].

Which gives $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ =

16 ms (32 slots), for SCS = 30kHz.

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

11.5 Measurement procedure

11.5.1 Intra-frequency measurements

11.5.1.0 Minimum Conformance Requirements

11.5.1.0.1 Minimum conformance requitements for intra-frequency measurements without measurement gaps

11.5.1.0.1.1 Intra-frequency cell identification

Same Minimum Conformance Requirements as in clause 10.4.1.0.1.1.

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.5.1.

11.5.1.0.1.2 Measurement period

Same Minimum Conformance Requirements as in clause 10.4.1.0.1.2.

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.5.2.

11.5.1.0.2 Minimum conformance requitements for intra-frequency measurements with measurement gaps

11.5.1.0.2.1 Intra-frequency cell identification

Same Minimum Conformance Requirements as in clause 10.4.1.0.2.1

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.6.1.

11.5.1.0.2.2 Intra-frequency measurement period

Same Minimum Conformance Requirements as in clause 10.4.1.0.2.2

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.6.2.

11.5.1.0.3 Minimum conformance requitements for intra-frequency RSSI and channel occupancy measurements

11.5.1.0.3.1 Intra-frequency RSSI measurements

Same Minimum Conformance Requirements as in clause 10.4.1.0.3.1.

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.7.1.

11.5.1.0.3.2 Intra-frequency channel occupancy measurements

Same Minimum Conformance Requirements as in clause 10.4.1.0.3.2.

The normative reference for this requirement is TS 38.133 [6] clause 9.2A.7.2.

11.5.1.1 SA FR1 Event-triggered reporting tests on PCC without gaps under non-DRX

11.5.1.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event without gaps in non DRX with CCA. This test will partly verify the intra-frequency cell search requirements.

11.5.1.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and intra-frequency measurements on shared channel access.

11.5.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.1.1.

11.5.1.1.4 Test description

Two cells are deployed in the test on the same carrier frequency with CCA transmitting SSBs in DBT windows according to DL CCA model: PCell (Cell 1) and a neighbour cell (Cell 2). The test parameters for the two cells are given in Table 11.5.1.1.4.1-1 and 11.5.1.1.4.1-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

.

11.5.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.1.1.4.1-1.

Table 11.5.1.1.4.1-1: Supported test configurations

Configuration	Description
11.5.1.1-1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.5.1.1.4.1-2.

Table 11.5.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE part. For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.5.1.1.4.1-3.
2. Message contents are defined in clause 11.5.1.1.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 11.5.1.1.4.1-3 General test parameters

Parameter		Unit	Test configuration	Value	Comment
Active cell			1	Cell 1	
Neighbour cell			1	Cell 2	Cell to be identified.
RF Channel Number			1	1: Cell 1 and Cell 2	
DL CCA model			1	As specified in clause D.7.2.1	
UL CCA model			1	As specified in clause D.7.2.12	
SSB configuration	Semi-static channel access Note 1,3		1	SSB.1 CCA	

	Dynamic channel access Note 2,3		1	SSB.2 CCA	
SMTC configuration			1	SMTC.1	
A3-Offset		dB	1	-4.5	
CP length			1	Normal	
Hysteresis		dB	1	0	
Time To Trigger		s	1	0	
Filter coefficient			1	0	L3 filtering is not used
DRX			1	OFF	DRX is not used
Time offset between serving and neighbour cells			1	3 μs	Synchronous cells
T1		s	1	5	
T2		s	1	5	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.					

11.5.1.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.5.1.1.5-1.

3. SS shall transmit an *RRCReconfiguration* message with event A3 with the corresponding offset according to Table 11.5.1.1.4.1-3.

4. The UE shall transmit *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.5.1.1.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in 11.5.1.1.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delay measured from the beginning of time period T2 is less than 842ms, then the number of successful tests is increased by one. If the UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   Or

- if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.5.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.1.1.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRP measurements

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-4 with A3-offset set as per Table 11.5.1.1.4.1-3 Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

11.5.1.1.5 Test requirements

Table 11.5.1.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRP measurements.

Table 11.5.1.1.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRP measurements

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability for semi-static channel access (P_{CCA_DL})		1	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
DL CCA probability for dynamic static channel access ($P_{CCA_DL_1}$)		1	$P_{CCA_DL_1}$=0.75		$P_{CCA_DL_1}$=0.75	
DL CCA probability for dynamic static channel access ($P_{CCA_DL_2}$)		1	$P_{CCA_DL_2}$=0.75		$P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}		1	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}		1	7		7	
W_{CCA_DL}	ms	1	600		600	
PDSCH RMC configuration		1	SR.1.1 CCA		N/A	
RMSI CORESET RMC configuration		1	CR.1.1 CCA		N/A	

Dedicated CORESET RMC configuration		1	CCR.1.1 CCA		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS Configuration		1	TRS.1.2 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1	-91	-91	-Infinity	-91
Io	dBm/38.16 MHz	1	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

The UE shall send one Event A3 triggered measurement report with a measurement reporting delay less than 840 ms from the beginning of time period T2.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.5.1.2 SA FR1 Event-triggered reporting tests on PCC without gaps under DRX

11.5.1.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event without gaps in DRX and with CCA. This test will partly verify the intra-frequency cell search requirements.

11.5.1.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U, long DRX and intra-frequency measurements on shared channel access.

11.5.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.1.2.

11.5.1.2.4 Test description

Two cells are deployed in the test on the same carrier frequency with CCA transmitting SSBs in DBT windows according to DL CCA model: PCell (Cell 1) and a neighbour cell (Cell 2). The test parameters for the two cells are given in Table 10.5.1.1.4.1-1 and 10.5.1.1.4.1-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.5.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.1.2.4.1-1.

Table 11.5.1.2.4.1-1: Supported test configuration

Configuration	Description
11.5.1.2-1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.5.1.2.4.1-2.

Table 11.5.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE part. For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.5.1.2.4.1-3.
2. Message contents are defined in clause 11.5.1.2.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 11.5.1.2.4.1-3 General test parameters

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test	
Active cell		1	Cell 1		
Neighbour cell		1	Cell 2		Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2		
DL CCA model		1	As specified in clause D.7.2.1		
UL CCA model		1	As specified in clause D.7.2.2		

SSB configuration	Semi-static channel access Note 1,3		1	SSB.1 CCA		
	Dynamic channel access Note 2,3		1	SSB.2 CCA		
SMTC configuration			1	SMTC.1		
A3-Offset		dB	1	-4.5		
CP length			1	Normal		
Hysteresis		dB	1	0		
Time To Trigger		s	1	0		
Filter coefficient			1	0		L3 filtering is not used
DRX			1	DRX.1	DRX.7	
Time offset between serving and neighbour cells			1	3 μs		Synchronous cells
T1		s	1	5		
T2		s	1	5	15	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.						

11.5.1.2.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.5.1.2.5-1.

3. SS shall transmit an *RRCReconfiguration* message with event A3 with the corresponding offset according to Table 11.5.1.2.4.1-3.

4. The UE shall transmit *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.5.1.2.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in 11.5.1.2.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delay measured from the beginning of time period T2 is less than 1202ms in test 1 and10242 ms in test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),

Or
- if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.5.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.1.2.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRP measurements

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-4 with A3-offset set as per Table 11.5.1.1.4.1-3 Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.7-1 with Condition DRX.1 and Offset for test 1 Table H.3.7-1 with Condition DRX.7 and Offset for test 2

11.5.1.2.5 Test requirements

Table 11.5.1.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRP measurements.

Table 11.5.1.2.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRP measurements

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability for semi-static channel access (P_{CCA_DL})		1	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
DL CCA probability for dynamic static channel access ($P_{CCA_DL_1}$)		1	$P_{CCA_DL_1}$=0.75		$P_{CCA_DL_1}$=0.75	
DL CCA probability for dynamic static channel access ($P_{CCA_DL_2}$)		1	$P_{CCA_DL_2}$=0.75		$P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}		1	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}		1	Test 1: L_{CCA_DL} = 5 Test 2: L_{CCA_DL} = 3		Test 1: L_{CCA_DL} = 5 Test 2: L_{CCA_DL} = 3	
W_{CCA_DL}	ms	1	Test 1: W_{CCA_DL} = 600 Test 2: W_{CCA_DL} = 5120		Test 1: W_{CCA_DL} = 600 Test 2: W_{CCA_DL} = 5120	

PDSCH RMC configuration		1	SR.1.1 CCA		N/A	
RMSI CORESET RMC configuration		1	CR.1.1 CCA		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 CCA		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS Configuration		1	TRS.1.2 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1	-91	-91	-Infinity	-91
Io	dBm/38.16 MHz	1	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

In test 1, the UE shall send one Event A3 triggered measurement report with a measurement reporting delay less than 1200 ms from the beginning of time period T2.

In test 2, the UE shall send one Event A3 triggered measurement report with a measurement reporting delay less than 10240 ms from the beginning of time period T2.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.5.2 Inter-frequency measurements

11.5.2.0 Minimum Conformance Requirements

11.5.2.0.1 Inter-frequency cell identification

Same Minimum Conformance Requirements as in clause 10.4.2.0.1

The normative reference for this requirement is TS 38.133 [6] clause 9.3A.4.

11.5.2.0.2 Inter-frequency measurements

Same Minimum Conformance Requirements as in clause 10.4.2.0.2

The normative reference for this requirement is TS 38.133 [6] clause 9.3A.5.

11.5.2.0.3 Inter-frequency RSSI measurements

Same Minimum Conformance Requirements as in clause 10.4.2.0.3

The normative reference for this requirement is TS 38.133 [6] clause 9.3A.9.

11.5.2.1 Void

11.5.2.2 Void

11.5.2.3 NR SA FR1-FR1 Event triggered reporting tests with CCA without SSB time index detection when DRX is not used

11.5.2.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in non DRX without SSB time index detection with CCA. This test will partly verify the SA inter-frequency NR cell search requirements for NR cell with CCA.

11.5.2.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and inter-frequency measurements on shared channel access.

11.5.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.2.0.1 and 11.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.2.3.

11.5.2.3.4 Test description

Two cells are deployed in the test. NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters for the two cells are given in Table 11.5.2.3.4.1-1 and 11.5.2.3.4.1-3 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.5.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.2.3.4.1-1.

Table 11.5.2.3.4.1-1: Supported test configurations

Configuration	Description
11.5.2.3-1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.5.2.3.4.1-2.

Table 11.5.2.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE part. For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.5.2.3.4.1-3.
2. Message contents are defined in clause 11.5.2.3.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 11.5.2.3.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value		Comment
NR RF Channel Number		Config 1	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cells		Config 1	NR cell 1 with CCA (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA		NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in clause A.3.26.2.1		
UL CCA model		Config 1	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1	0		
Measurement gap offset		Config 1	9		
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	1.7		

11.5.2.3.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The CCA model (both DL and UL) is disabled (i.e.

$P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

11. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.5.2.3.5-1.

3. The SS shall transmit an *RRCReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.5.2.3.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.5.2.3.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1602 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.5.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.2.3.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRP measurements

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 11.5.2.3.4.3-2: MeasGapConfig: measurement gap configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapUE CHOICE {			
setup SEQUENCE {			
gapOffset	9		
mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			
}			

11.5.2.3.5 Test requirements

Table 11.5.2.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRP measurements.

Table 11.5.2.3.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRP measurements

Parameter		**Unit**	**Test configuration**	**Cell 1**		**Cell 2**	
				T1	**T2**	**T1**	**T2**
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD			
TDD configuration			Config 1	TDDConf.1.1 CCA			
$BW_{channel}$		MHz	Config 1	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1		NA	
	Initial UL BWP	Config 1		ULBWP.0.1		NA	
	Dedicated DL BWP	Config 1		DLBWP.1.1		NA	
	Dedicated UL BWP	Config 1		ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 CCA			
CORESET Reference Channel			Config 1	CR.1.1 CCA			
SSB parameters	Semi-static channel access Note 5,7		Config 1	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration defined in A.3.11			Config 1	SMTC.1		SMTC.4	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	

	Dynamic channel access Note 6,7		Config 1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1	12		12	
W_{CCA_DL}		ms	Config 1	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30			
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

SMTC period = 20 ms.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.2.4 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used

11.5.2.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in DRX without SSB time index detection with CCA. This test will partly verify the SA inter-frequency NR cell search requirements for NR cell with CCA.

11.5.2.4.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and inter-frequency measurements on shared channel access.

11.5.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.2.0.1 and 11.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.2.4.

11.5.2.4.4 Test description

Two cells are deployed in the test. NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters for the two cells are given in Table 11.5.2.4.4.1-1 and 11.5.2.4.4.1-3 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.5.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.2.4.4.1-1.

Table 11.5.2.4.4.1-1: Supported test configurations

Configuration	Description
11.5.2.4-1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.5.2.4.4.1-2.

Table 11.5.2.4.4.1-2: Initial conditions

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9 -1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE part. For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.5.2.4.4.1-3.
2. Message contents are defined in clause 11.5.2.4.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 11.5.2.4.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cells		Config 1	NR cell 1 with CCA (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA		NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in TS 38.133 [6] clause A.3.26.2.1		
UL CCA model		Config 1	As specified in TS 38.133 [6] clause A.3.26.2.2		
Gap Pattern Id		Config 1	0		As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1	9		
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.2	As specified in clause TS 38.133 [6] A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	2.5	17	

Table 11.5.2.4.4.1-4: DRX-Configuration

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [13]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	

shortDRX	disable	disable	

Table 11.5.2.4.4.1-5: *TimeAlignmentTimer* -Configuration

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [13]

11.5.2.4.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.5.2.4.5-1.

3. The SS shall transmit an *RRCReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.5.2.4.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.5.2.4.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 2402 ms for Test 1 or 16642 ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.5.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.2.4.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRP measurements

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 for Test 1 or DRX.2 for Test 2 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 11.5.2.4.4.3-2: MeasGapConfig: measurement gap configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapUE CHOICE {			
setup SEQUENCE {			
gapOffset	9		
mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			
}			

11.5.2.4.5 Test requirements

Table 11.5.2.4.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRP measurements.

Table 11.5.2.4.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRP measurements

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD			
TDD configuration			Config 1	TDDConf.1.1 CCA			
$BW_{channel}$		MHz	Config 1	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1		NA	
	Initial UL BWP	Config 1		ULBWP.0.1		NA	
	Dedicated DL BWP	Config 1		DLBWP.1.1		NA	
	Dedicated UL BWP	Config 1		ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	

PDSCH Reference measurement channel			Config 1	SR.1.1 CCA			
CORESET Reference Channel			Config 1	CR.1.1 CCA			
SSB parameters	Semi-static channel access Note 5,7		Config 1	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access Note 6,7		Config 1	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration defined in A.3.11			Config 1	SMTC.1		SMTC.4	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30			
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.2.5 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used

11.5.2.5.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in non-DRX with SSB time index detection with CCA. This test will partly verify the SA inter-frequency NR cell search requirements for NR cell with CCA.

11.5.2.5.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and inter-frequency measurements on shared channel access.

11.5.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.2.0.1 and 11.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.2.5.

11.5.2.5.4 Test description

Two cells are deployed in the test. NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters for the two cells are given in Table 11.5.2.5.4.1-1 and 11.5.2.5.4.1-3 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.5.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.2.5.4.1-1.

Table 11.5.2.5.4.1-1: Supported test configurations

Configuration	Description
11.5.2.5-1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.5.2.5.4.1-2.

Table 11.5.2.5.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE part. For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.5.2.5.4.1-3.
2. Message contents are defined in clause 11.5.2.5.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 11.5.2.5.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cells		Config 1	NR cell 1 with CCA (PCell)	NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA	NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in clause A.3.26.2.1	
UL CCA model		Config 1	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	9	
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	

Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	2	

11.5.2.5.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

12. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.5.2.5.5-1.

3. The SS shall transmit an *RRCReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.5.2.5.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.5.2.5.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1922 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

11. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

    - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

12. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

13. Depending on the choice in Step 7, the SS:
    - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

14. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.5.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.2.5.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRP measurements

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB and with Condition SSB Index Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 11.5.2.5.4.3-2: MeasGapConfig: measurement gap configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapUE CHOICE {			
setup SEQUENCE {			
gapOffset	9		
mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			

11.5.2.5.5 Test requirements

Table 11.5.2.5.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRP measurements.

Table 11.5.2.5.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRP measurements

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD			
TDD configuration			Config 1	TDDConf.1.1 CCA			
$BW_{channel}$		MHz	Config 1	40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1	40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1		NA	
	Initial UL BWP	Config 1		ULBWP.0.1		NA	
	Dedicated DL BWP	Config 1		DLBWP.1.1		NA	
	Dedicated UL BWP	Config 1		ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 CCA			
CORESET Reference Channel			Config 1	CR.1.1 CCA			
SSB parameters			Config 1	SSB.1 CCA		SSB.1 CCA	

	Semi-static channel access Note 5,7						
	Semi-static channel access Note 5,7		Config 1	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration defined in A.3.11			Config 1	SMTC.1		SMTC.4	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1	P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1	5		5	
W_{CCA_DL}		ms	Config 1	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30			
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.2.6 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used

11.5.2.6.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in DRX with SSB time index detection with CCA. This test will partly verify the SA inter-frequency NR cell search requirements for NR cell with CCA.

11.5.2.6.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and inter-frequency measurements on shared channel access.

11.5.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.2.0.1 and 11.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.2.6.

11.5.2.6.4 Test description

Two cells are deployed in the test. NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters for the two cells are given in Table 11.5.2.6.4.1-1 and 11.5.2.6.4.1-3 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.5.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.2.6.4.1-1.

Table 11.5.2.6.4.1-1: Supported test configurations

Configuration	Description
11.5.2.6-1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.5.2.6.4.1-2.

Table 11.5.2.6.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE part. For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.5.2.6.4.1-3.
2. Message contents are defined in clause 11.5.2.6.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 11.5.2.6.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cells		Config 1	NR cell 1 with CCA (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA		NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in clause A.3.26.2.1		
UL CCA model		Config 1	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	9		
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.2	As specified in clause A.3.3

Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	3	20	

Table 11.5.2.6.4.1-4: DRX-Configuration

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table 11.5.2.6.4.1-5: *TimeAlignmentTimer* -Configuration

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

11.5.2.6.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

13. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.5.2.6.5-1.

3. The SS shall transmit an *RRCReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.5.2.6.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.5.2.6.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 2882 ms for Test 1 or 19842 ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

15. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

    - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

16. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

17. Depending on the choice in Step 7, the SS:
    - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

18. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.5.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.2.6.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRP measurements

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB and with Condition SSB Index Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 for Test 1 or DRX.2 for Test 2 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 11.5.2.6.4.3-2: MeasGapConfig: measurement gap configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapUE CHOICE {			
setup SEQUENCE {			
gapOffset	9		
mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			

11.5.2.6.5 Test requirements

Table 11.5.2.6.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRP measurements.

Table 11.5.2.6.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRP measurements

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1	1		2	

Duplex mode			Config 1	TDD	
TDD configuration			Config 1	TDDConf.1.1 CCA	
$BW_{channel}$		MHz	Config 1	40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1	40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1	NA
	Initial UL BWP	Config 1		ULBWP.0.1	NA
	Dedicated DL BWP	Config 1		DLBWP.1.1	NA
	Dedicated UL BWP	Config 1		ULBWP.1.1	NA
TRS configuration			Config 1	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 CCA	
SSB parameters	Semi-static channel access Note 5,7		Config 1	SSB.1 CCA	SSB.1 CCA
	Semi-static channel access Note 5,7		Config 1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1	As defined in A.3.28.1	As defined in A.3.28.1
SMTC configuration defined in A.3.11			Config 1	SMTC.1	SMTC.4
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375
	Dynamic channel access Note 6,7		Config 1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1	P_{CCA_UL}=1	P_{CCA_UL}=1
	Dynamic channel access Note 6,7		Config 1	P_{CCA_UL}=1	P_{CCA_UL}=1
L_{CCA_DL}			Config 1	2	2
W_{CCA_DL}		ms	Config 1	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30	
EPRE ratio of PSS to SSS			Config 1	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		dBm/15 kHz	Config 1	-98	-98

N_{oc} Note2	dBm/SCS	Config 1	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.2.7 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

11.5.2.7.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in non-DRX without SSB time index detection with CCA. This test will partly verify the SA inter-frequency NR cell search requirements for NR cell with CCA.

11.5.2.7.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and inter-frequency measurements on shared channel access.

11.5.2.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.2.0.1 and 11.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.2.7.

11.5.2.7.4 Test description

Two cells are deployed in the test. NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters for the two cells are given in Table 11.5.2.7.4.1-1 and 11.5.2.7.4.1-3 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.5.2.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.2.7.4.1-1.

Table 11.5.2.7.4.1-1: Supported test configurations

Config	Description
11.5.2.7-1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
11.5.2.7-2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
11.5.2.7-3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.5.2.7.4.1-2.

Table 11.5.2.7.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	WithoutLTE part. For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.5.2.7.4.1-3.
2. Message contents are defined in clause 11.5.2.7.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 11.5.2.7.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.

Active cell		Config 1,2,3	NR cell 1 (PCell)	NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3	NR cell 2	NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1	
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1,2,3	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1.7	

11.5.2.7.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

14. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.5.2.7.5-1.

3. The SS shall transmit an *RRCReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.5.2.5.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.5.2.7.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1922 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

19. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

    - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

20. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

21. Depending on the choice in Step 7, the SS:
- if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
OR
- if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

22. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.5.2.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.2.7.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRP measurements

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 11.5.2.7.4.3-2: MeasGapConfig: measurement gap configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapUE CHOICE {			
setup SEQUENCE {			
gapOffset	9		
mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			

11.5.2.7.5 Test requirements

Table 11.5.2.7.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRP measurements.

Table 11.5.2.7.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRP measurements

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1	TDD		FDD	

			Config 2,3	TDD	TDD
TDD configuration			Config 1	TDDConf.1.1 CCA	Not Applicable
			Config 2	TDDConf.1.1 CCA	TDDConf.1.1
			Config 3	TDDConf.1.1 CCA	TDDConf.2.1
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106	10: $N_{RB,c}$ = 52
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106	10: $N_{RB,c}$ = 52
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	NA
	Initial UL BWP			ULBWP.0.1	NA
	Dedicated DL BWP			DLBWP.1.1	NA
	Dedicated UL BWP			ULBWP.1.1	NA
TRS configuration			Config 1,2,3	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA	
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA	
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA	SSB.1 FR1
			Config 3	SSB.1 CCA	SSB.2 FR1
	Semi-static channel access Note 5,7		Config 1,2	SSB.2 CCA	SSB.1 FR1
			Config 3	SSB.2 CCA	SSB.2 FR1
DBT window configuration			Config 1,2,3	As defined in A.3.28.1	Not applicable
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30	15
			Config 3	30	30
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_DL}=0.9375	NA
	Dynamic channel access Note 6,7		Config 1,2,3	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	NA
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_UL}=1	NA
	Dynamic channel access Note 6,7		Config 1,2,3	P_{CCA_UL}=1	NA
L_{CCA_DL}			Config 1,2,3	12	12
W_{CCA_DL}		ms	Config 1,2,3	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
EPRE ratio of PSS to SSS			Config 1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

N_{oc} Note2	dBm/15kHz	Config 1,2,3	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-91	-91	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-58.49	-58.49	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.2.8 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used

11.5.2.8.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in DRX without SSB time index detection with CCA. This test will partly verify the SA inter-frequency NR cell search requirements.

11.5.2.8.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and inter-frequency measurements on shared channel access.

11.5.2.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.2.0.1 and 11.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.2.8.

11.5.2.8.4 Test description

Two cells are deployed in the test. NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters for the two cells are given in Table 11.5.2.8.4.1-1 and 11.5.2.8.4.1-3 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.5.2.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.2.8.4.1-1.

Table 11.5.2.8.4.1-1: Supported test configurations

Config	Description
11.5.2.8-1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
11.5.2.8-2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
11.5.2.8-3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.5.2.8.4.1-2.

Table 11.5.2.8.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9 -1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE part. For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.5.2.8.4.1-3.
2. Message contents are defined in clause 11.5.2.8.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 11.5.2.8.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.
Active cell		Config 1,2,3	NR cell 1 (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.

Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3µs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	2.5	17	

Table 11.5.2.8.4.1-4: DRX-Configuration

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table 11.5.2.8.4.1-5: *TimeAlignmentTimer* -Configuration

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

11.5.2.8.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

15. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.5.2.8.5-1.

3. The SS shall transmit an *RRCReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.5.2.8.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.5.2.8.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 2402 ms for Test 1 and 16642 ms for Test2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

23. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

    - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

24. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

25. Depending on the choice in Step 7, the SS:
    - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

26. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.5.2.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.2.8.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRP measurements

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition Gap, INTER-FREQ, DRX.1 (Test 1) and DRX.2 (Test 2) Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 11.5.2.8.4.3-2: MeasGapConfig: measurement gap configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapUE CHOICE {			

setup SEQUENCE {			
gapOffset	9		
mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			

11.5.2.8.5 Test requirements

Table 11.5.2.8.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRP measurements.

Table 11.5.2.8.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRP measurements

Parameter		Unit	Test configuration	Cell 1				Cell 2			
				T1	T2	T3	T4	T1	T2	T3	T4
NR RF Channel Number			Config 1,2,3	1				2			
Duplex mode			Config 1	TDD				FDD			
			Config 2,3	TDD				TDD			
TDD configuration			Config 1	TDDConf.1.1 CCA				Not Applicable			
			Config 2	TDDConf.1.1 CCA				TDDConf.1.1			
			Config 3	TDDConf.1.1 CCA				TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106				10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106			
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106				10: $N_{RB,c}$ = 52			
			Config 3	40: $N_{RB,c}$ = 106				40: $N_{RB,c}$ = 106			
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1				NA			
	Initial UL BWP			ULBWP.0.1				NA			
	Dedicated DL BWP			DLBWP.1.1				NA			
	Dedicated UL BWP			ULBWP.1.1				NA			
TRS configuration			Config 1,2,3	TRS.1.2 TDD				NA			
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1				OP.1			
PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA							
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA							
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA				SSB.1 FR1			
			Config 3	SSB.1 CCA				SSB.2 FR1			
	Semi-static channel access Note 5,7		Config 1,2	SSB.2 CCA				SSB.1 FR1			
			Config 3	SSB.2 CCA				SSB.2 FR1			
DBT window configuration			Config 1,2,3	As defined in A.3.28.1				Not applicable			
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1				SMTC.4			
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30				15			
			Config 3	30				30			
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_DL}=0.9375				NA			
	Dynamic channel access Note 6,7		Config 1,2,3	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75				NA			
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_UL}=1				NA			

	Dynamic channel access Note 6,7		Config 1,2,3	P_{CCA_UL}=1		NA	
L_{CCA_DL}			Config 1,2,3	5		5	
W_{CCA_DL}		ms	Config 1,2,3	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2,3	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98	
			Config 3	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-91	-91	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-58.49	-58.49	-70.05	-62.26
		dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

In test 1 and UE is not required to report SSB time index.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.2.9 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

11.5.2.9.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in non-DRX with SSB time index detection with CCA. This test will partly verify the SA inter-frequency NR cell search requirements.

11.5.2.9.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and inter-frequency measurements on shared channel access.

11.5.2.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.2.0.1 and 11.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.2.9.

11.5.2.9.4 Test description

Two cells are deployed in the test. NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters for the two cells are given in Table 11.5.2.9.4.1-1 and 11.5.2.9.4.1-3 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.5.2.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.2.9.4.1-1.

Table 11.5.2.9.4.1-1: Supported test configurations

Config	Description
11.5.2.9-1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
11.5.2.9-2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
11.5.2.9-3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.5.2.9.4.1-2.

Table 11.5.2.9.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9 -1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	Without LTE part. For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.	

1. The general test parameter settings are set up according to Table 11.5.2.9.4.1-3.
2. Message contents are defined in clause 11.5.2.9.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 11.5.2.9.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.
Active cell		Config 1,2,3	NR cell 1 (PCell)	NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3	NR cell 2	NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1	
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1,2,3	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	2	

11.5.2.9.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

16. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 11.5.2.9.5-1.
3. The SS shall transmit an *RRCReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.5.2.5.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.5.2.9.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1922 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

27. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

    - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

    OR

    - switch the UE off.

28. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

29. Depending on the choice in Step 7, the SS:
    - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
    OR
    - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

30. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.5.2.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.2.9.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRP measurements

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 11.5.2.9.4.3-2: MeasGapConfig: measurement gap configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapUE CHOICE {			
setup SEQUENCE {			
gapOffset	9		

mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			

11.5.2.9.5 Test requirements

Table 11.5.2.9.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRP measurements.

Table 11.5.2.9.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRP measurements

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	TDD		FDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	TDDConf.1.1 CCA		Not Applicable	
			Config 2	TDDConf.1.1 CCA		TDDConf.1.1	
			Config 3	TDDConf.1.1 CCA		TDDConf.2.1	
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2,3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA			
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA			
SSB parameters	Semi-static channel access Note 5,7		Config 1,2	SSB.1 CCA		SSB.1 FR1	
			Config 3	SSB.1 CCA		SSB.2 FR1	
	Semi-static channel access Note 5,7		Config 1,2	SSB.2 CCA		SSB.1 FR1	
			Config 3	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3	As defined in A.3.28.1		Not applicable	
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30		15	
			Config 3	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_DL}=0.9375		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		NA	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_UL}=1		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	P_{CCA_UL}=1		NA	

L_{CCA_DL}		Config 1,2,3	5		5	
W_{CCA_DL}	ms	Config 1,2,3	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	Config 1,2,3	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-91	-91	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-58.49	-58.49	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The UE is required to report SSB time index.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.2.10 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used

11.5.2.10.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event in DRX with SSB time index detection with CCA. This test will partly verify the SA inter-frequency NR cell search requirements.

11.5.2.10.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and inter-frequency measurements on shared channel access.

11.5.2.10.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.2.0.1 and 11.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.2.10.

11.5.2.10.4 Test description

Two cells are deployed in the test. NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters for the two cells are given in Table 11.5.2.10.4.1-1 and 11.5.2.10.4.1-3 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.5.2.10.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.2.10.4.1-1.

Table 11.5.2.10.4.1-1: Supported test configurations

Config	Description
11.5.2.10-1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
11.5.2.10-2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
11.5.2.10-3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.5.2.10.4.1-2.

Table 11.5.2.10.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2a	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE part. For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part.		

1. The general test parameter settings are set up according to Table 11.5.2.10.4.1-3.

2. Message contents are defined in clause 11.5.2.10.4.3.

3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

Table 11.5.2.10.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.
Active cell		Config 1,2,3	NR cell 1 (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	3	20	

Table 11.5.2.10.4.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table 11.5.2.10.4.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment

TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

11.5.2.10.4.2 Test procedure

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

17. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 11.5.2.10.5-1.

3. The SS shall transmit an *RRCReconfiguration* message with event A3 configured on Cell 1.

4. The UE shall transmit *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.5.2.10.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 11.5.2.10.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 2882 ms for Test 1 and 9842 ms for Test2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) and set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in NR Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),
   OR
   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.5.2.10.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.2.10.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRP measurements

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition Gap, INTER-FREQ, DRX.1 (Test 1) and DRX.2 (Test 2) Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

Table 11.5.2.10.4.3-2: MeasGapConfig: measurement gap configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapUE CHOICE {			
setup SEQUENCE {			
gapOffset	9		
mgl	ms6		
mgrp	ms40		
mgta	ms0		
}			
}			

11.5.2.10.5 Test requirements

Table 11.5.2.10.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRP measurements.

Table 11.5.2.10.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRP measurements

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	TDD		FDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	TDDConf.1.1 CCA		Not Applicable	
			Config 2	TDDConf.1.1 CCA		TDDConf.1.1	
			Config 3	TDDConf.1.1 CCA		TDDConf.2.1	
$BW_{channel}$		MHz	Config 1,2	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	40: $N_{RB,c}$ = 106		10: $N_{RB,c}$ = 52	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2,3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA			
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA			
SSB parameters			Config 1,2	SSB.1 CCA		SSB.1 FR1	

	Semi-static channel access Note 5,7		Config 3	SSB.1 CCA		SSB.2 FR1	
	Semi-static channel access Note 5,7		Config 1,2	SSB.2 CCA		SSB.1 FR1	
			Config 3	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3	As defined in A.3.28.1		Not applicable	
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30		15	
			Config 3	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_DL}=0.9375		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		NA	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	P_{CCA_UL}=1		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	P_{CCA_UL}=1		NA	
L_{CCA_DL}			Config 1,2,3	2		2	
W_{CCA_DL}		ms	Config 1,2,3	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2,3	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98	
			Config 3	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-91	-91	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-58.49	-58.49	-70.05	-62.26
		dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

In test 1 and 2 UE is required to report SSB time index.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.3 Inter-RAT E-UTRAN measurements

11.5.3.0 Minimum conformance requirements

Same minimum conformance requirements as in 6.6.3.0.

11.5.3.1 NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX

11.5.3.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1.

11.5.3.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting RRM measurements with a shared spectrum NR carrier.

11.5.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.3.1.

11.5.3.1.4 Test description

Two cells are deployed in the test. Cell 1 is the NR PCell on a frequency carrier with CCA and Cell 2 is an inter-RAT E-UTRAN neighbour cell. Each test consists of two consecutive time periods, with durations T1 and T2, respectively.

11.5.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.3.1.4.1-1.

Table 11.5.3.1.4.1-1: Supported test configurations

Test ID	Description
11.5.3.1-1	NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
11.5.3.1-2	NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.5.3.1.4.1-2.

Table 11.5.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.5.3.1.4.1-3.
2. Message contents are defined in clause 11.5.3.1.4.3.
3. Cell specific test parameters are set up according to Table 11.5.3.2.5-1.

Table 11.5.3.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables 11.5.3.1.5-1 and 11.5.3.1.5-2	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in TS 38.11 [6]Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in TS.38.133 [6] Table A.11.5.3.1.1-3			

11.5.3.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of E-UTRA cell 2. The CCA model (both DL and UL) is disabled (i.e. PCCA_DL_i= PCCA_UL=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 11.5.3.1.5-1 and 11.5.3.1.5-2. Propagation conditions are set according to Annex C clause C.2.2.
3. SS shall transmit an *RRCReconfiguration* message with event B2 configured on Cell 1.
4. The UE shall transmit *RRCReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 11.5.3.1.5-1. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in tables 11.5.3.1.5-1 and 11.5.3.1.5-2. T2 starts.
6. The UE shall transmit a MeasurementReport message triggered by Event B2. If the measurement reporting delay from the beginning of time period T2 is less than 3842ms the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one.
7. After the SS receive the MeasurementReport message in step 6 or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.
9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED according to TS 38.508-1 [14] clause 4.5.4 (if the paging fails, switches off and on the UE and ensures the UE is in the state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5,
     OR

   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11.5.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.3.1.4.3-1: Common Exception messages for NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-RAT Table H.3.1-3A Table H.3.1-4A Table H.3.1-5 with Condition INTER-RAT Table H.3.1-6 with Condition Pattern #0 Table H.3.1-7 with Condition INTER-RATTable H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access

11.5.3.1.5 Test requirements

Table 11.5.3.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX in FR1.

Table 11.5.3.1.5-1: PCell specific test parameters for NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-106	
N_{oc} Note2	dBm/SCS	1, 2	-103	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-83.45	-105
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	19.55	-2
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	19.55	-2
Io Note3	dBm/38.16MHz	1, 2	-52.35	-69.82
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2	1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 11.5.3.1.5-2: E-UTRAN neighbour cell specific test parameters for NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1,2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1,2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2	-104	

$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	18.55
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2	-Infinity	18.55
RSRP Note5	dBm/15kHz	1, 2	-Infinity	-85.45
SCH_RP Note5	dBm/15kHz	1, 2	-Infinity	-85.45
Io Note5	dBm/9MHz	1, 2	-73.21+10log ($N_{RB,c}$ /50)	-56.12+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2	1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.3.2 NR SA FR1 - E-UTRAN event-triggered reporting in DRX

11.5.3.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1.

11.5.3.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting RRM measurements with a shared spectrum NR carrier and long DRX cycle.

11.5.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.3.2.

11.5.3.2.4 Test description

Two cells are deployed in the test. Cell 1 is the NR PCell on a frequency carrier with CCA and Cell 2 is an inter-RAT E-UTRAN neighbour cell. Each test consists of two consecutive time periods, with durations T1 and T2, respectively.

11.5.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.3.2.4.1-1.

Table 11.5.3.2.4.1-1: Supported test configurations

Test ID	Description
11.5.3.2-1	NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
11.5.3.2-2	NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD

Note: The UE is only required to be tested in one of the supported test configurations

Configure the test equipment and the DUT according to the parameters in Table 11.5.3.2.4.1-2.

Table 11.5.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.5.3.2.4.1-3.
2. Message contents are defined in clause 11.5.3.2.4.3.
3. Cell specific test parameters are set up according to Table 11.5.3.2.5-1.

Table 11.5.3.2.4.1-3: General test parameters

Parameter	Unit	Test 1	Test 2	Comment
		Value		
NR RF Channel Number		1		1 NR carrier frequency is used in the test
LTE RF Channel Number		2		1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables 11.5.3.2.5-1 and 11.5.3.2.5-2		
Active cell		Cell 1		Cell 1 is on RF channel number 1
Neighbour cell		Cell 2		Cell 2 is on RF channel number 2
Gap Pattern Id		0		As specified in TS 38.11 [6] Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP		Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP		Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95		E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0		
TimeToTrigger	s	0		
Filter coefficient		0		L3 filtering is not used
DRX		DRX.1	DRX.7	DRX cycle configurations DRX.1 and DRX.7 are defined in Table A.5-1
T1	s	5		
T2	s	5	15	
Note 1: Values are defined in TS 38.11 [6] Table A.11.5.3.2.1-3				

11.5.3.2.4.2 Test procedure

Same test proccedure as in 11.5.3.1.4.2 with the following exception in step 6:

6. The UE shall transmit a MeasurementReport message triggered by Event B2. If the measurement reporting delay from the beginning of time period T2 is less than 3842ms for test 1 and less than 12802ms for test 2, the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement then the number of failure tests is increased by one.

11.5.3.2.4.3 Message contents

Same message content as in 11.5.3.1.4.3 with the following exceptions:

Table 11.5.3.2.4.3-1: Common Exception messages NR SA FR1 – E-UTRAN event-triggered reporting in DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with Condition DRX.1 and Gap for Test 1 Table H.3.7-1 with Condition DRX.7 and OFFSET for Test 2

11.5.3.2.5 Test requirements

Table 11.5.3.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX in FR1.

Table 11.5.3.2.5-1: PCell specific test parameters for NR SA FR1 - E-UTRAN event-triggered reporting in DRX

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-106	
N_{oc} Note2	dBm/SCS	1, 2	-103	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-83.45	-105
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	19.55	-2
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	19.55	-2
Io Note3	dBm/38.16MHz	1, 2	-52.35	-69.82
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2	1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 11.5.3.2.5-2: E-UTRAN neighbour cell specific test parameters for NR SA FR1 - E-UTRAN event-triggered reporting in DRX

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1,2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1,2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				

N_{oc} Note4	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	18.55
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2	-Infinity	18.55
RSRP Note5	dBm/15kHz	1, 2	-Infinity	-85.45
SCH_RP Note5	dBm/15kHz	1, 2	-Infinity	-85.45
Io Note5	dBm/9MHz	1, 2	-73.21+10log ($N_{RB,c}$ /50)	-56.12+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2	1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 12.8s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.4 L1-RSRP measurements for beam reporting

11.5.4.0 Minimum conformance requirements

Same minimum conformance requirements as in 10.4.3.0.

11.5.4.1 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used

11.5.4.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement under CCA when DRX is not used.

11.5.4.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting RRM measurements and UL with a shared spectrum NR carrier.

11.5.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.4.1.

11.5.4.1.4 Test description

There is one cell in the test, the FR1 PCell (Cell 1). Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test consists of two consecutive time periods, with durations T1 and T2, respectively.

11.5.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.4.1.4.1-1.

Table 11.5.4.1.4.1-1: Supported test configurations

Test ID	Description
11.5.4.1-1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.5.4.1.4.1-2.

Table 11.5.4.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.5.4.1.4.1-3.
2. Message contents are defined in clause 11.5.4.1.4.3.

Table 11.5.4.1.4.1-3: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
DL CCA model	1		As specifieed in A.3.20.2.1
UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
$BW_{channel}$	1	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA
SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1

			ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		Off
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

11.5.4.1.4.2 Test procedure

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

Prior to the start of the time duration T1, the UE shall be fully synchronized to PCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above Table 11.5.4.1.4.1-3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 11.5.4.1.4.1-3.

2. Set the parameters according to T1 in Table 11.5.4.1.5-1. The SS shall enable DL and UL CCA model according to Table 11.5.4.1.5-1. T1 starts.

3. The UE shall be transmitting CSI on PUCCH with a periodicity of 80 slots.

4. When T1 expires, the SS shall set the parameters according to T2 in 11.5.4.1.5-1. T2 starts.

5. The UE shall start sending L1-RSRP reports. The SS shall check following requirements:

   R1: the UE shall start to transmit valid reports no later than 680 ms for configuration 1 and 2 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 in Table 11.5.4.1.5-2 and the relative L1-RSRP requirement for SSB#0 in Table 11.5.4.1.5-3. If the first

valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 11.5.4.1.5-2 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

R4: The DIFF RSRP value of SSB#0 reported by the UE is compared to the expected DIFF RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 11.5.4.1.5-3 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

6. After T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   OR

   - switch the UE off.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED according to TS 38.508-1 [14] clause 4.5.4 (if the paging fails, switches off and on the UE and ensures the UE is in the state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 and general test parameters set according to Table 11.5.4.1.4.1-3, OR

   - if the device has been switched off, switches on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat step 2-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11.5.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.5.4.1.4.3-1: Common Exception messages for NR SA FR1 SSB based L1-RSRP measurement when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 11.5.4.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

11.5.4.1.5 Test requirements

Table 11.5.4.1.5-1 defines the primary level settings including test tolerances for SSB based L1-RSRP measurement in non-DRX.

Table 11.5.4.1.5-1: SSB specific test parameters for NR SA FR1 SSB based L1-RSRP measurement when DRX is not used

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} Note2	1	dBm/15kHz	-94.65			
N_{oc} Note2	1	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.15
Io Note3	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 7:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in and relative accuracy requirement in Table 11.5.4.1.5-2 and 11.5.4.1.5-3.

Table 11.5.4.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 11.5.4.1.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.4.2 NR SA FR1 SSB based L1-RSRP measurement when DRX is used

11.5.4.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement under CCA when DRX is used.

11.5.4.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting RRM measurements and UL with a shared spectrum NR carrier and long DRX cycle.

11.5.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.5.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.4.2.

11.5.4.2.4 Test description

There is one cell in the test, the FR1 PCell (Cell 1). Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test consists of two consecutive time periods, with durations T1 and T2, respectively.

11.5.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.4.2.4.1-1.

Table 11.5.4.2.4.1-1: Supported test configurations

Test ID	Description

11.5.4.2-1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.5.4.2.4.1-2.

Table 11.5.4.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.5.4.2.4.1-3.
2. Message contents are defined in clause 11.5.4.2.4.3.

Table 11.5.4.2.4.1-3: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
DL CCA model	1		As specified in A.3.20.2.1
UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
$BW_{channel}$	1	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA
SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		DRX.3
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			

EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

11.5.4.2.4.2 Test procedure

Same test procedure as in subclause 11.5.4.1.4.2 with tables 11.5.4.1.4.1-2 and 11.5.4.1.5-1 replaced by tables 11.5.4.2.4.1-2 and 11.5.4.2.5-1.

11.5.4.2.4.3 Message contents

Same message content as in subclause11.5.4.1.4.3 with the following exceptions:

Table 11.5.4.2.4.3-1: Common Exception messages for NR SA FR1 SSB based L1-RSRP measurement when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3

11.5.4.2.5 Test requirements

Table 11.5.4.2.5-1 defines the primary level settings including test tolerances for SSB based L1-RSRP measurement in DRX.

Table 11.5.4.2.5-1: SSB specific test parameters for NR SA FR1 SSB based L1-RSRP measurement when DRX is used

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} Note2	1	dBm/15kHz	-94.65			
N_{oc} Note2	1	dBm/SSB SCS	-91.65			

$\hat{E}_s/I_{ot}$	1	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.15
Io Note3	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s/N_{oc}$	1	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement and relative accuracy requirement in Table 11.5.4.2.5-2 and 11.5.4.2.5-3.

Table 11.5.4.2.5-2: L1-RSRP absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 11.5.4.2.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.4.3 NR SA FR1 SSB based L1-RSRP measurement on SCC when DRX is not used

11.5.4.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement on SCC under CCA when DRX is not used.

11.5.4.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting RRM measurements and UL with a shared spectrum NR carrier.

11.5.4.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.5.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.4.3.

11.5.4.3.4 Test description

There are two cells in the test, the FR1 PCell (Cell 1) and FR1 SCell (Cell 2). Both Cell 1 and Cell 2 operate on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test consists of two consecutive time periods, with durations T1 and T2, respectively.

11.5.4.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.4.3.4.1-1.

Table 11.5.4.3.4.1-1: Supported test configurations

Test ID	Description
11.5.4.3-1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.5.4.3.4.1-2.

Table 11.5.4.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.8-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.5.4.3.4.1-3.
2. Message contents are defined in clause 11.5.4.3.4.3.

Table 11.5.4.3.4.1-3: General test parameters

Parameter	Config	Unit	Value
Active PCell	1		Cell 1
Active SCell	1		Cell 2
RF Channel Number	1		1: Cell 1 2: Cell 2
DL CCA model	1		As specifieed in A.3.20.2.1
UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
$BW_{channel}$	1	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA

SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		Off
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

11.5.4.3.4.2 Test procedure

Same test procedure as in subclause 11.5.4.1.4.2 with tables 11.5.4.1.4.1-2 and 11.5.4.1.5-1 replaced by tables 11.5.4.3.4.1-2 and 11.5.4.3.5-1.

11.5.4.3.4.3 Message contents

Same message content as in subclause11.5.4.1.4.3.

11.5.4.3.5 Test requirements

Table 11.5.4.3.5-1 defines the primary level settings including test tolerances for SSB based L1-RSRP measurement on SCC in non-DRX.

Table 11.5.4.3.5-1: SSB specific test parameters for NR SA FR1 SSB based L1-RSRP measurement on SCC when DRX is not used

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2

DL CCA Probability P_{CCA_DL} Note 4,6	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} Note2	1	dBm/15kHz	-94.65s			
N_{oc} Note2	1	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.15
Io Note3	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.

Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement and relative accuracy requirement in TS 38.133 [6] in Table 11.5.4.3.5-2 and 11.5.4.3.5-3.

Table 11.5.4.3.5-2: L1-RSRP absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 11.5.4.3.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.5.4.4 NR SA FR1 SSB based L1-RSRP measurement on SCC when DRX is used

11.5.4.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP on SCC measurement under CCA when DRX is used.

11.5.4.4.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting RRM measurements and UL with a shared spectrum NR carrier and long DRX cycle.

11.5.4.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.5.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.11.5.4.4.

11.5.4.4.4 Test description

There are two cells in the test, the FR1 PCell (Cell 1) and FR1 SCell (Cell 2). Both Cell 1 and Cell 2 operate on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test consists of two consecutive time periods, with durations T1 and T2, respectively.

11.5.4.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.5.4.4.4.1-1.

Table 11.5.4.4.4.1-1: Supported test configurations

Test ID	Description
11.5.4-1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.5.4.4.4.1-2.

Table 11.5.4.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.9-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 10.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.3	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

1. The general test parameter settings are set up according to Table 11.5.4.4.4.1-3.
2. Message contents are defined in clause 11.5.4.4.4.3.

Table 11.5.4.4.4.1-3: General test parameters

Parameter	Config	Unit	Value
Active PCell	1		Cell 1
Active SCell	1		Cell 2
RF Channel Number	1		1: Cell 1

			2: Cell 2
DL CCA model	1		As specifieed in A.3.20.2.1
UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
$BW_{channel}$	1	MHz	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA
SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		DRX.3
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

11.5.4.4.4.2 Test procedure

Same test procedure as in subclause 11.5.4.1.4.2 with tables 11.5.4.1.4.1-2 and 11.5.4.1.5-1 replaced by tables 11.5.4.4.4.1-2 and 11.5.4.4.5-1.

11.5.4.4.4.3 Message contents

Same message content as in subclause11.5.4.1.4.3 with the following exceptions:

Table 11.5.4.4.4.3-1: Common Exception messages for NR SA FR1 SSB based L1-RSRP measurement on SCC when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3

11.5.4.4.5 Test requirements

Table 11.5.4.4.5-1 defines the primary level settings including test tolerances for SSB based L1-RSRP measurement on SCC in DRX.

Table 11.5.4.4.5-1: Cell specific test parameters for NR SA FR1 SSB based L1-RSRP measurement on SCC when DRX is used

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} Note2	1	dBm/15kHz	-94.65			
N_{oc} Note2	1	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.15
Io Note3	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement and relative accuracy requirement Table 11.5.4.4.5-2 and 11.5.4.4.5-3.

Table 11.5.4.4.5-2: L1-RSRP absolute accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2

Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 11.5.4.4.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

11.6 Measurement Performance

11.6.1 SS-RSRP

11.6.1.0 Minimum Conformance Requirements

11.6.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements under CCA

Same as in clause 10.5.1.0.1.

11.6.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements under CCA

Same as in clause 10.5.1.0.2.

11.6.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements under CCA

Same as in clause 10.5.1.0.3.

11.6.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements under CCA

Same as in clause 10.5.1.0.4.

11.6.1.1 NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA

11.6.1.1.1 Test purpose

The purpose of this test is to verify that the SS-RSRP measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will verify the requirements in clauses 11.6.1.0.1 and 11.6.1.0.2 for intra-frequency measurements under CCA.

11.6.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone NR-U, UL in shared spectrum and RRM measurements in dynamic channel access or in semi-static channel access.

11.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.6.1.0.1 and 11.6.1.0.2 for absolute and relative accuracy, correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.1.1.

11.6.1.1.4 Test description

Supported test configurations are shown in Table 11.6.1.1.4.1-1. Both absolute and relative accuracies of SS-RSRP intra-frequency measurements are tested by using the parameters in Table 11.6.1.1.5-1. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

11.6.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.1.1.4.1-1.

Table 11.6.1.1.4.1-1: Supported test configurations for NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA

Configuration	Description
11.6.1.1-1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.1.1.4.1-2.

Table 11.6.1.1.4.1-2: Initial conditions for NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.1.1.5-1.
2. Message contents are defined in clause 11.6.1.1.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test.

11.6.1.1.4.2 Test procedure

In this set of test cases all cells are on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 11.6.1.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform intra-frequency measurements as specified in section 11.6.1.1.4.3.
4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.1.1.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the SS-RSRP reported values in the periodic *MeasurementReport*. The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP. If the value is outside the limits in Table 11.6.1.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
8. Repeat steps 1-7 for each subtest defined in Table 11.6.1.1.5-1.

11.6.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.1.1.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessTable H.3.10-2 with Condition SMTC.1

Table 11.6.1.1.4.3-2: *ReportConfigNR* for NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

11.6.1.1.5 Test requirements

Table 11.6.1.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA. Table 11.6.1.1.5-2 and Table 11.6.1.1.5-3 define the absolute and relative accuracy requirements, correspondingly.

Table 11.6.1.1.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID				489	0	489	0	489	0
SSB ARFCN				freq1		freq1		freq1	
TDD configuration	Config 1			TDDConf.1.1 CCA					
$BW_{channel}$	Config 1		MHz	40: $N_{RB,c}$ = 106					
BWP BW	Config 1			40: $N_{RB,c}$ = 106					
DL CCA model				As specified in clause D.7.2.1					
UL CCA model				As specified in clause D.7.2.2					
P_{CCA_DL} for dynamic channel access Note 7,9				$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75					
P_{CCA_DL} for semi-static channel access Note 8,9				P_{CCA_DL}=0.9375					
P_{CCA_UL}				1					
Downlink initial BWP configuration				DLBWP.0.1					
Downlink dedicated BWP configuration				DLBWP.1.1					
Uplink initial BWP configuration				ULBWP.0.1					
Uplink dedicated BWP configuration				ULBWP.1.1					
TRS configuration	Config 1			TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel	Config 1			SR.1.1 CCA	-	SR.1.1 CCA	-	SR.1.1 CCA	-
RMSI CORESET Reference Channel	Config 1			CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
Control channel RMC	Config 1			CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
SSB configuration for semi-static channel access	Config 1			SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA
SSB configuration for dynamic channel access	Config 1			SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA
DBT window configuration	Config 1,2,3			DBT.1	DBT.1	DBT.1	DBT.1	DBT.1	DBT.1
Time offset with Cell 1	Config 1		µs	-	3	-	3	-	3
SMTC configuration	Config 1			SMTC.1					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1		kHz	30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1	NR_CCA_FR1_I		Not applicable Note 5		-94		-111	
		NR_CCA_FR1_J						-111	
	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applicable Note 5		-91		-108	

N_{oc} Note2		NR_CCA_FR1_J						-108	
$\hat{E}_s/I_{ot}$ Note6			dB	Not applicable Note 5	Not applicable Note 5	2.23	-5.57	-2.11	-3.34
$\hat{E}_s/N_{oc}$ Note6			dB	Not applicable Note 5	Not applicable Note 5	6	1.4	1	0.20
SS-RSRP Note3,6	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applicable Note 5	Not applicable Note 5	-85	-89.6	-107	-107.8
		NR_CCA_FR1_J						-107	-107.8
Io Note3	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	Not applicable Note 5		-51.91		-71.75	
		NR_CCA_FR1_J						-71.75	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
NOTE 6: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 9: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 11.6.1.1.5-2: Absolute accuracy requirements for the reported values for NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest SS-RSRP reported value (cell 2)	57	Bands NR_CCA_FR1_I	43
		Bands NR_CCA_FR1_J	43
Highest SS-RSRP reported value (cell 2)	76	Bands NR_CCA_FR1_I	55
		Bands NR_CCA_FR1_J	55
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest SS-RSRP reported value (cell 2)	54	Bands NR_CCA_FR1_I	38
		Bands NR_CCA_FR1_J	38
Highest SS-RSRP reported value (cell 2)	79	Bands NR_CCA_FR1_I	59
		Bands NR_CCA_FR1_J	59

Table 11.6.1.1.5-3: Relative accuracy requirements for the reported values for NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA

	Test 1	**Test 2**
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 2)	RSRP_x – 8	RSRP_x – 7
Highest reported value (Cell 2)	RSRP_x – 1	RSRP_x + 1
Extreme Conditions		
Lowest reported value (Cell 2)	RSRP_x – 8	RSRP_x – 7
Highest reported value (Cell 2)	RSRP_x - 1	RSRP_x + 1
RSRP_x is the reported value of Cell 1		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.6.1.2 NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA

11.6.1.2.1 Test purpose

The purpose of this test is to verify that the SS-RSRP measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will verify the requirements in clauses 11.6.1.0.1 and 11.6.1.0.2 for intra-frequency measurements under CCA.

11.6.1.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone 2DL CA NR-U, UL in shared spectrum and RRM measurements in dynamic channel access or in semi-static channel access.11.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.6.1.0.1 and 11.6.1.0.2 for absolute and relative accuracy, correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.1.2.

11.6.1.2.4 Test description

Supported test configurations are shown in Table 11.6.1.2.4.1-1. Both absolute and relative accuracies of SS-RSRP intra-frequency measurements are tested by using the parameters in Table 11.6.1.2.5-1. In all test cases, Cell 1 is the PCell, Cell 2 is the SCell, and Cell 3 is the target cell.

11.6.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.1.2.4.1-1.

Table 11.6.1.2.4.1-1: Supported test configurations for NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA

Configuration	Description
11.6.1.2-1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.1.2.4.1-2.

Table 11.6.1.2.4.1-2: Initial conditions for NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	

Exceptions to connection diagram	LTE link is not used in this test	

1. The general test parameter settings are set up according to Table 11.6.1.2.5-1.
2. Message contents are defined in clause 11.6.1.2.4.3.
3. Cell 1 is the NR PCell, Cell 2 is the NR SCell, Cell 3 is the NR target cell, all of which have power levels set according to clauses C.1.2 and C.1.3 for this test.

11.6.1.2.4.2 Test procedure

Three cells are deployed in the test, which are FR1 PCell (Cell 1) on the carrier frequency with CCA, and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE.
2. Set the parameters according to Table 11.6.1.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform intra-frequency measurements as specified in section 11.6.1.2.4.3.
4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.1.2.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the SS-RSRP reported values in the periodic *MeasurementReport*. The SS-RSRP value of Cell 3 reported by the UE is compared to the expected SS-RSRP. If the value is outside the limits in Table 11.6.1.2.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.8. Repeat steps 1-7 for each subtest defined in Table 11.6.1.2.5-1.

11.6.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.1.2.4.3-1: Common Exception messages for NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessTable H.3.10-2 with Condition SMTC.1

Table 11.6.1.2.4.3-2: *ReportConfigNR* for NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

11.6.1.2.5 Test requirements

Table 11.6.1.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA. Table 11.6.1.2.5-2 and Table 11.6.1.2.5-3 define the absolute and relative accuracy requirements, correspondingly.

Table 11.6.1.2.5-1: Cell specific test parameters for NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
TDD configuration	Config 1		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c}$ = 106					
BWP BW	Config 1		40: $N_{RB,c}$ = 106					
DL CCA model			As specified in clause D.7.2.1					
UL CCA model			As specified in clause D.7.2.2					
P_{CCA_DL} for dynamic channel access Note 7,9			$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75					
P_{CCA_DL} for semi-static channel access Note 8,9			P_{CCA_DL}=0.9375					
P_{CCA_UL}			1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA	-	SR.1.1 CCA	-	SR.1.1 CCA	-
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
Control channel RMC	Config 1		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
SSB configuration for semi-static channel access	Config 1		SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA
SSB configuration for dynamic channel access	Config 1		SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA
DBT window configuration	Config 1,2,3		DBT.1	DBT.1	DBT.1	DBT.1	DBT.1	DBT.1

Time offset with Cell 1	Config 1		μs	-	3	-	3	-	3
SMTC configuration	Config 1			SMTC.1					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1		kHz	30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1	NR_CCA_FR1_I		Not applicable Note 5		-94		-111	
		NR_CCA_FR1_J						-111	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applicable Note 5		-91		-108	
		NR_CCA_FR1_J						-108	
$\hat{E}_s/I_{ot}$ Note6			dB	2.23	-5.57	2.23	-5.57	-2.11	-3.34
$\hat{E}_s/N_{oc}$ Note6			dB	6	1.4	6	1.4	1	0.2
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applicable Note 5	Not applicable Note 5	-85	-89.6	-107	-107.8
		NR_CCA_FR1_J						-107	-107.8
Io Note3	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	Not applicable Note 5		-51.91		-71.75	
		NR_CCA_FR1_J						-71.75	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
NOTE 6: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 9: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 11.6.1.2.5-2: Absolute accuracy requirements for the reported values for NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest SS-RSRP reported value (cell 3)	57	Bands NR_CCA_FR1_I	43
		Bands NR_CCA_FR1_J	43
Highest SS-RSRP reported value (cell 3)	76	Bands NR_CCA_FR1_I	55
		Bands NR_CCA_FR1_J	55
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest SS-RSRP reported value (cell 3)	54	Bands NR_CCA_FR1_I	38
		Bands NR_CCA_FR1_J	38
Highest SS-RSRP reported value (cell 3)	79	Bands NR_CCA_FR1_I	59
		Bands NR_CCA_FR1_J	59
Note 1: NR operating band groups are defined in [clause 3A.4, Table 3A.4.1-2]			

Table 11.6.1.2.5-3: Relative accuracy requirements for the reported values for NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	RSRP_x – 8	RSRP_x – 7
Highest reported value (Cell 3)	RSRP_x – 1	RSRP_x + 1
Extreme Conditions		
Lowest reported value (Cell 3)	RSRP_x – 8	RSRP_x – 7
Highest reported value (Cell 3)	RSRP_x - 1	RSRP_x + 1
RSRP_x is the reported value of Cell 1		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.6.2 SS-RSRQ

11.6.2.0 Minimum Conformance Requirements

11.6.2.0.1 Intra-frequency absolute SS-RSRQ measurement accuracy requirements under CCA

Same as in clause 10.5.2.0.1.

11.6.2.0.2 Void

11.6.2.0.3 Inter-frequency absolute SS-RSRQ measurement accuracy requirements under CCA

Same as in clause 10.5.2.0.3.

11.6.2.0.4 Inter-frequency relative SS-RSRQ measurement accuracy requirements under CCA

Same as in clause 10.5.2.0.4.

11.6.2.1 NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

11.6.2.1.1 Test purpose

The purpose of this test is to verify that the SS-RSRQ measurement accuracy on the carrier frequency with CCA is within the specified limits.

11.6.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone NR-U, UL in shared spectrum and RRM measurements in dynamic channel access or in semi-static channel access.

11.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.6.2.0.1 for absolute accuracy under CCA.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.2.1.

11.6.2.1.4 Test description

Supported test configurations are shown in Table 11.6.2.1.4.1-1. Absolute accuracy of SS-RSRQ intra-frequency measurements are tested by using the parameters in Table 11.6.2.1.5-1. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is the target cell with CCA.

11.6.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.2.1.4.1-1.

Table 11.6.2.1.4.1-1: Supported test configurations for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

Configuration	Description
11.6.2.1-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.6.2.1.4.1-2.

Table 11.6.2.1.4.1-2: Initial conditions for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.2.1.5-1.
2. Message contents are defined in clause 11.6.2.1.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test. All cells are on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model.

11.6.2.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
2. Set the parameters according to Table 11.6.2.1.5-1 as appropriate.

3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform intra-frequency measurements as specified in section 11.6.2.1.4.3.

4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.2.1.5-1.

5. The UE shall transmit periodical *MeasurementReport* messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic *MeasurementReport*. The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 11.6.2.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

8. Repeat steps 1-7 for each subtest defined in Table 11.6.2.1.5-1.

11.6.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.2.1.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessTable H.3.10-2 with Condition SMTC.1

Table 11.6.2.1.4.3-2: *ReportConfigNR* for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	true		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

11.6.2.1.5 Test requirements

Table 11.6.2.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA. Table 11.6.2.1.5-2 define the absolute accuracy requirements.

Table 11.6.2.1.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

Parameter			Unit	Test 1		Test 2	
				Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN				freq1			
DL CCA model		Config 1		As specified in clause D.7.2.1			
UL CCA model		Config 1		As specified in clause D.7.2.2			
DL CCA probability for semi-static channel access Note 7, 8		P_{CCA_UL}		1.0	-	1.0	-
		P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9		$P_{CCA_DL_1}$		0.75	-	0.75	-
		$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode		Config 1		TDD			
TDD configuration		Config 1		TDDConf.1.1 CCA			
$BW_{channel}$		Config 1	MHz	40: $N_{RB,c}$ = 106			
BWP configuration		Initial DL BWP		DLBWP.0.1			
		Dedicated DL BWP		DLBWP.1.1			
		Initial UL BWP		ULBWP.0.1			
		Dedicated UL BWP		ULBWP.1.1			
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		Config 1		CR.1.1 CCA		CR.1.1 CCA	
Control Channel RMC		Config 1		CCR.1.1 CCA		CCR.1.1 CCA	
TRS configuration		Config 1		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OP. 1			
SS-RSSI-Measurement				Not Applicable			
Time offset with Cell 1		Config 1	µs	-	3	-	3
DBT Window Configuration		Config 1		DBT.1 (As defined in A.12.1)			
SSB configuration		Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration		Config 1		SMTC.1			
PDSCH/PDCCH subcarrier spacing		Config 1	kHz	30kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	Config1	NR_CCA_FR1_I	dBm/15kHz	-92.6		-110	
		NR_CCA_FR1_J				-109.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-89.6		-107	
		NR_CCA_FR1_J				-106.5	
$\hat{E}_s / I_{ot}$			dB	-1.76		-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	3	3	-4	-4
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	-86.59	-86.59	-111	-111
		NR_CCA_FR1_J				-110.5	-110.5
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77	-14.77	-17.34	-17.34
		NR_CCA_FR1_J					

Io[Note3]	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.56		-73.4	-73.4
		NR_CCA_FR1_J				-72.9	-72.9
Propagation condition			-	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in Clause 3.5.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.6.2.1.5-2: Absolute accuracy requirements for the reported values for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

	Test 1	**Test 2**
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 2)	SS-RSRQ_52	SS-RSRQ_44
Highest reported value (Cell 2)	SS-RSRQ_62	SS-RSRQ_59
Extreme Conditions		
Lowest reported value (Cell 2)	SS-RSRQ_49	SS-RSRQ_43
Highest reported value (Cell 2)	SS-RSRQ_65	SS-RSRQ_60

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.6.2.2 NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

11.6.2.2.1 Test purpose

The purpose of this test is to verify that the SS-RSRQ measurement accuracy on the carrier frequency with CCA is within the specified limits.

11.6.2.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone NR-U, UL in shared spectrum and RRM measurements in dynamic channel access or in semi-static channel access.

11.6.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.6.2.0.3 and 11.6.2.0.4 for absolute and relative accuracy under CCA, correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.2.2.

11.6.2.2.4 Test description

Supported test configurations are shown in Table 11.6.2.2.4.1-1. Both absolute and relative accuracies of SS-RSRQ inter-frequency measurements are tested by using the parameters in Table 11.6.2.2.5-1. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is target cell with CCA. The inter-frequency measurements are supported by a measurement gap.

11.6.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.2.2.4.1-1.

Table 11.6.2.2.4.1-1: Supported test configurations for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

Configuration	Description
11.6.2.2-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.6.2.2.4.1-2.

Table 11.6.2.2.4.1-2: Initial conditions for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.2.2.5-1.
2. Message contents are defined in clause 11.6.2.2.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test. The two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies, with CCA and transmit SSBs in DBT windows according to DL CCA model.

11.6.2.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1.
2. Set the parameters according to Table 11.6.2.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform inter-frequency measurements as specified in section 11.6.2.2.4.3.

4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.2.2.5-1.

5. The UE shall transmit periodical *MeasurementReport* messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic *MeasurementReport*. The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 11.6.2.2.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

8. Repeat steps 1-7 for each subtest defined in Table 11.6.2.2.5-1.

11.6.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.2.2.4.3-1: Common Exception messages for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessTable H.3.10-2 with Condition SMTC.1

Table 11.6.2.2.4.3-2: *ReportConfigNR* for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	true		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

11.6.2.2.5 Test requirements

Table 11.6.2.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA. Table 11.6.2.2.5-2 and Table 11.6.2.2.5-3 define the absolute and relative accuracy requirements, correspondingly.

Table 11.6.2.2.5-1: Cell specific test parameters for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN				freq1	freq2	freq1	freq2	freq1	freq2
DL CCA model		Config 1		As specified in clause D.7.2.1					
UL CCA model		Config 1		As specified in clause D.7.2.2					
UL CCA probability		P_{CCA_UL}		1.0	-	1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8		P_{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9		$P_{CCA_DL_1}$		0.75	-	0.75	-	0.75	-
		$P_{CCA_DL_2}$		0.75	-	0.75	-	0.75	-
Duplex mode		Config 1		TDD					
TDD configuration		Config 1		TDDConf.1.1 CCA					
$BW_{channel}$		Config 1	MHz	40: $N_{RB,c}$ = 106					
Gap pattern ID		Config 1		0					
BWP BW		Config 1		40: NRB,c = 106					
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		Config 1		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA	
TRS Configuration		Config 1		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OCNG pattern 1					
Time offset with Cell 1		Config 1	µs	-	3	-	3	-	3
DBT Window configuration		Config 1		DBT.1					
SSB configuration		Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access					
SMTC configuration		Config 1		SMTC.1					
PDSCH/PDCCH subcarrier spacing		Config 1	kHz	30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-87.80		-113		-112	
		NR_CCA_FR1_J						-111.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-84.80		-110		-109	
		NR_CCA_FR1_J						-108.5	
$\hat{E}_s / I_{ot}$			dB	-1.75		-1.75		3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75		-1.75		3	-1.75
SS-RSRP Note3	Config 1	NR_CCA_FR1_I		-86.54	-86.54	-111.74	-111.74	-105.99	-110.74
		NR_CCA_FR1_J						-105.49	-110.24

SS-RSRQ[Note3]		NR_CCA_FR1_I	dB	-14.76	-14.76	-14.76	-14.76	12.56	14.76
		NR_CCA_FR1_J							
Io[Note3]	Config 1	NR_CCA_FR1_I	dBm/SCS	-51.52		-76.72		-73.18	-75.72
		NR_CCA_FR1_J						-72.68	-75.22
Propagation condition			-	AWGN					
Antenna configuration				1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.6.2.2.5-2: Absolute accuracy requirements for the reported values for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

	Test 1	**Test 2**	**Test 3**
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_52	SS-RSRQ_52	SS-RSRQ_52
Highest reported value (Cell 2)	SS-RSRQ_62	SS-RSRQ_62	SS-RSRQ_62
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_49	SS-RSRQ_49	SS-RSRQ_49
Highest reported value (Cell 2)	SS-RSRQ_65	SS-RSRQ_65	SS-RSRQ_65

Table 11.6.2.2.5-3: Relative accuracy requirements for the reported values for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA

	Test 1	**Test 2**	**Test 3**
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x - 7	SS-RSRQ_x - 7	SS-RSRQ_x - 11
Highest reported value (Cell 2)	SS-RSRQ_x + 7	SS-RSRQ_x + 7	SS-RSRQ_x + 2
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x - 9	SS-RSRQ_x - 9	SS-RSRQ_x - 13
Highest reported value (Cell 2)	SS-RSRQ_x + 9	SS-RSRQ_x + 9	SS-RSRQ_x + 4
RSRQ_x is the reported value of Cell 1			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.6.2.3 NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on SCC on a carrier frequency with CCA

11.6.2.3.1 Test purpose

The purpose of this test is to verify that the SS-RSRQ measurement accuracy on the carrier frequency with CCA is within the specified limits.

11.6.2.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone 2DL CA NR-U and RRM measurements in dynamic channel access or in semi-static channel access.

11.6.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.6.2.0.1 for absolute accuracy under CCA.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.2.3.

11.6.2.3.4 Test description

Supported test configurations are shown in Table 11.6.2.3.4.1-1. Absolute accuracy of SS-RSRQ intra-frequency measurements are tested by using the parameters in Table 11.6.2.3.5-1. In all test cases, Cell 1 is the PCell with CCA, Cell 2 is the SCell with CCA, and Cell 3 is the target cell with CCA.

11.6.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.2.3.4.1-1.

Table 11.6.2.3.4.1-1: Supported test configurations for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on SCC on a carrier frequency with CCA

Configuration	Description
11.6.2.3-1	SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.2.3.4.1-2.

Table 11.6.2.3.4.1-2: Initial conditions for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on SCC on a carrier frequency with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.2.3.5-1.
2. Message contents are defined in clause 11.6.2.3.4.3.
3. Cell 1 is the PCell with CCA, Cell 2 is the SCell with CCA, and Cell 3 is the target cell with CCA, all of which have power levels set according to clauses C.1.2 and C.1.3 for this test. PCell (Cell 1) is on one carrier frequency with CCA, Cell 2 and Cell 3 are both on a different carrier frequency than Cell 1.

11.6.2.3.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).

2. Set the parameters according to Table 11.6.2.3.5-1 as appropriate.

3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform intra-frequency measurements as specified in section 11.6.2.3.4.3.

4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.2.3.5-1.

5. The UE shall transmit periodical *MeasurementReport* messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic *MeasurementReport*. The SS-RSRQ value of Cell 3 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 11.6.2.3.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

8. Repeat steps 1-7 for each subtest defined in Table 11.6.2.3.5-1.

11.6.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.2.3.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on SCC on a carrier frequency with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access H.3.10-2 with Condition SMTC.1 CCA

Table 11.6.2.3.4.3-2: *ReportConfigNR* for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on SCC on a carrier frequency with CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

11.6.2.3.5 Test requirements

Table 11.6.2.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA. Table 11.6.2.3.5-2 defines the absolute accuracy requirements.

Table 11.6.2.3.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on SCC on a carrier frequency with CCA

Parameter			Unit	Test 1		Test 2	
				Cell 1 / Cell 2	Cell 3	Cell 1 / Cell 2	Cell 3
SSB ARFCN				freq1 for Cell 1 freq2 for Cell 2	freq2	freq1 for Cell 1 freq2 for Cell 2	freq2
DL CCA model		Config 1		As specified in clause D.7.2.1			
UL CCA model		Config 1		As specified in clause D.7.2.2			
DL CCA probability for semi-static channel access Note 7, 8		P_{CCA_UL}		1.0	-	1.0	-
		P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9		$P_{CCA_DL_1}$		0.75	-	0.75	-
		$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode		Config 1		TDD			
TDD configuration		Config 1		TDDConf.1.1 CCA			
$BW_{channel}$		Config 1	MHz	40: $N_{RB,c}$ = 106			
BWP configuration		Initial DL BWP		DLBWP.0.1			
		Dedicated DL BWP		DLBWP.1.1			
		Initial UL BWP		ULBWP.0.1			
		Dedicated UL BWP		ULBWP.1.1			
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		Config 1		CR.1.1 CCA		CR.1.1 CCA	
Control Channel RMC		Config 1		CCR.1.1 CCA		CCR.1.1 CCA	
TRS configuration		Config 1		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OP. 1			
SS-RSSI-Measurement				Not Applicable			
Time offset with Cell 1		Config 1	µs	-	3	-	3
DBT Window Configuration		Config 1		DBT.1 (As defined in A.12.1)			
SSB configuration		Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration		Config 1		SMTC.1			
CSI-RS for tracking		Config 1		TRS.1.2 TDD			
PDSCH/PDCCH subcarrier spacing		Config 1	kHz	30kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	Config1	NR_CCA_FR1_I	dBm/15kHz	-92.6		-110	
		NR_CCA_FR1_J				-109.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-89.6		-107	

		NR_CCA_FR1_J				-106.5	
$\hat{E}_s / I_{ot}$			dB	-1.76		-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	3	3	-4	-4
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	-86.59	-86.59	-111	-111
		NR_CCA_FR1_J				-110.5	-110.5
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77	-14.77	-17.34	-17.34
		NR_CCA_FR1_J					
Io Note3	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.56		-73.4	-73.4
		NR_CCA_FR1_J				-72.9	-72.9
Propagation condition			-	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in Clause 3.5.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.6.2.3.5-2: Absolute accuracy requirements for the reported values for NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on SCC on a carrier frequency with CCA

	Test 1	**Test 2**
	All bands	
Normal Conditions		
Lowest reported value (Cell 2)	SS-RSRQ_52	SS-RSRQ_44
Highest reported value (Cell 2)	SS-RSRQ_62	SS-RSRQ_59
Extreme Conditions		
Lowest reported value (Cell 2)	SS-RSRQ_49	SS-RSRQ_43
Highest reported value (Cell 2)	SS-RSRQ_65	SS-RSRQ_60

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.6.2.4 NR SA FR1 Inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA from carrier without CCA

Editor's Note:

- MU and TT analysis is incomplete

11.6.2.4.1 Test purpose

The purpose of this test is to verify that the SS-RSRQ measurement accuracy on the carrier frequency with CCA is within the specified limits.

11.6.2.4.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone NR-U, UL in shared spectrum and RRM measurements in dynamic channel access or in semi-static channel access.

11.6.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.6.2.0.3 and 11.6.2.0.4 for absolute and relative accuracy under CCA, correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.2.4.

11.6.2.4.4 Test description

Supported test configurations are shown in Table 11.6.2.4.4.1-1. Both absolute and relative accuracies of SS-RSRQ inter-frequency measurements are tested by using the parameters in Table 11.6.2.4.5-1. In all test cases, Cell 1 is the PCell and Cell 2 is target cell with CCA. The inter-frequency measurements are supported by a measurement gap.

11.6.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.2.4.4.1-1.

Table 11.6.2.4.4.1-1: Supported test configurations for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA from carrier without CCA

Configuration	Description
11.6.2.4-1	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
11.6.2.4-2	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
11.6.2.4-3	Without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.6.2.4.4.1-2.

Table 11.6.2.4.4.1-2: Initial conditions for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA from carrier without CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.2.4.5-1.
2. Message contents are defined in clause 11.6.2.4.4.3.
3. Cell 1 is the PCell and Cell 2 is target cell with CCA, all of which have power levels set according to clauses C.1.2 and C.1.3 for this test. The two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies, Cell 2 is with CCA and transmit SSBs in DBT windows according to DL CCA model.

11.6.2.4.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
2. Set the parameters according to Table 11.6.2.4.5-1 and Table 11.6.2.4.5-2 appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform inter-frequency measurements as specified in section 11.6.2.4.4.3.
4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.2.4.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic *MeasurementReport*. The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 11.6.2.4.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
8. Repeat steps 1-7 for each subtest defined in Table 11.6.2.4.5-1.

11.6.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.2.4.4.3-1: Common Exception messages for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA from carrier without CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER -FREQ MO Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access H.3.10-2 with Condition SMTC.1 CCA

Table 11.6.2.4.4.3-2: *ReportConfigNR* for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA from carrier without CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			

reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

11.6.2.4.5 Test requirements

Table 11.6.2.4.5-1 defines the primary level settings including test tolerances for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA. Table 11.6.2.4.5-3 and Table 11.6.2.4.5-4 define the absolute and relative accuracy requirements, correspondingly.

Table 11.6.2.4.5-1: Cell specific test parameters for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA from carrier without CCA for target cell

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 2	Cell 2	Cell 2
SSB ARFCN			freq2	freq2	freq2
DL CCA model	Config 1, 2, 3		As specified in clause D.7.2.1		
UL CCA model	Config 1, 2, 3		As specified in clause D.7.2.2		
UL CCA probability	P_{CCA_UL}		1.0		
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375		
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75		
	$P_{CCA_DL_2}$		0.75		
Duplex mode	Config 1, 2, 3		TDD		
TDD configuration	Config 1, 2, 3		TDDConf.1.1 CCA		
$BW_{channel}$	Config 1, 2, 3	MHz	40: $N_{RB,c}$ = 106		
Gap pattern ID	Config 1, 2, 3		0		
BWP BW	Config 1, 2, 3		40: NRB,c = 106		
DRX Cycle		ms	Not Applicable		
OCNG Patterns			OCNG pattern 1		
Time offset with Cell 1	Config 1, 2, 3	µs	3		
DBT Window configuration	Config 1, 2, 3		DBT.1		
SSB configuration	Config 1, 2, 3		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access		
SMTC configuration	Config 1, 2, 3		SMTC.1		
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 3	kHz	30 kHz		
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	NR_CCA_FR1_I	dBm/15kHz	-86.27+TT	-113+TT	-112
	NR_CCA_FR1_J				-111.5

N_{oc} Note2	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-83.27+TT	-110+TT	-109
		NR_CCA_FR1_J				-108.5
$\hat{E}_s/I_{ot}$			dB	-1.75+TT	-1.75+TT	-1.75+TT
$\hat{E}_s/N_{oc}$			dB	-1.75+TT		-1.75+TT
SS-RSRP Note3	Config 1, 2, 3	NR_CCA_FR1_I		-85.02+TT	-111.75+TT	-110.75+TT
		NR_CCA_FR1_J				-110-.25+TT
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77+TT	-40.59+TT	14.76+TT
		NR_CCA_FR1_J				
Io Note3	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-50	-76.73	-75.73
		NR_CCA_FR1_J				-75.23
Propagation condition			-	AWGN		
Antenna configuration				1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.6.2.4.5-2: Cell specific test parameters for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA from carrier without CCA for NR PCell

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 1	Cell 1	Cell 1
SSB ARFCN			freq1		
Duplex mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52		
	Config 2		10: $N_{RB,c}$ = 52		
	Config 3		40: $N_{RB,c}$ = 106		
Gap Pattern ID			0		
BWP configuration	Initial DL BWP		DLBWP.0.1		
	Dedicated DL BWP		DLBWP.1.1		
	Initial UL BWP		ULBWP.0.1		
	Dedicated UL BWP		ULBWP.1.1		
DRX Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		

		Config 2		SR.1.1 TDD		
		Config 3		SR2.1 TDD		
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD		
		Config 2		CR.1.1 TDD		
		Config 3		CR.2.1 TDD		
Control Channel RMC		Config 1		CCR.1.1 FDD		
		Config 2		CCR.1.1 TDD		
		Config 3		CCR.2.1 TDD		
TRS Configuration		Config 1		TRS.1.1 FDD		
		Config 2		TRS.1.1 TDD		
		Config 3		TRS.1.2 TDD		
OCNG Patterns				OP. 1		
SS-RSSI-Measurement				Not Applicable		
SMTC configuration		Config 1		SMTC.2		
		Config 2,3		SMTC.1		
SSB configuration		Config 1,2		SSB.1 FR1		
		Config 3		SSB.2 FR1		
CSI-RS for tracking		Config 1		TRS.1.1 FDD		
		Config 2		TRS.1.1 TDD		
		Config 3		TRS.1.2 TDD		
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz		
		Config 3		30 kHz		
EPRE ratio of PSS to SSS			dB	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2	Depending on band group NOTE 6	dBm/15kHz	-85+TT	-101 +TT	-114 + Δ_{BG_offset} +TT
	Config 3	Depending on band group NOTE 6		-91 +TT	-	-114 + Δ_{BG_offset} +TT
N_{oc} Note2	Config 1,2	Depending on band group NOTE 6	dBm/SCS	-85 +TT	-101 +TT	-114+ Δ_{BG_offset} +TT
	Config 3	Depending on band group NOTE 6		-88 +TT	-	-111+ Δ_{BG_offset} +TT
$\hat{E}_s/I_{ot}$			dB	-1.76 +TT	-4.7 +TT	-5.46
$\hat{E}_s/N_{oc}$			dB	3 +TT	-2.9 +TT	-4
SS-RSRP Note 3	Config 1,2	Depending on band group NOTE 6	dBm/SCS	-82 +TT	-103.9 +TT	-118 + Δ_{BG_offset} +TT
	Config 3	Depending on band group NOTE 6		-85 +TT	-	-115 + Δ_{BG_offset} +TT
SS-RSRQ Note3		Depending on band group NOTE 6	dB	-14.77 +TT	-16.76 +TT	-17.34 + Δ_{BG_offset} +TT
Io Note3	Config 1,2	Depending on band group NOTE 6	dBm/ 9.36MHz	-50	-70	-83.5 + Δ_{BG_offset} +TT
	Config 3	Depending on band group NOTE 6	dBm/ 38.16MHz	-50	-	-77.4 + Δ_{BG_offset} +TT
Propagation condition			-	AWGN		
Antenna configuration				1x2		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.
Note 7: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2

Table 11.6.2.4.5-3: Absolute accuracy requirements for the reported values for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA from carrier without CCA

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest SS-RSRQ reported value	FFS	FFS	Bands FFS	FFS
			Bands FFS	FFS
			Bands FFS	FFS
			Bands FFS	FFS
Highest SS-RSRQ reported value	FFS	FFS	Bands FFS	FFS
			Bands FFS	FFS
			Bands FFS	FFS
			Bands FFS	FFS
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1				

Table 11.6.2.4.5-4: Relative accuracy requirements for the reported values for NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA from carrier without CCA

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	RSRQ_x – FFS	RSRQ_x – FFS	RSRQ_x – FFS
Highest reported value (Cell 3)	RSRQ_x – FFS	RSRQ_x + FFS	RSRQ_x + FFS
Extreme Conditions			
Lowest reported value (Cell 3)	RSRQ_x – FFS	RSRQ_x – FFS	RSRQ_x – FFS
Highest reported value (Cell 3)	RSRQ_x – FFS	RSRQ_x + FFS	RSRQ_x + FFS
RSRQ_x is the reported value of Cell 2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.6.3 SS-SINR

11.6.3.0 Minimum Conformance Requirements

11.6.3.0.1 Intra-frequency absolute SS-SINR measurement accuracy requirements under CCA

Same as in clause 10.5.3.0.1.

11.6.3.0.2 Void

11.6.3.0.3 Inter-frequency absolute SS-SINR measurement accuracy requirements under CCA

Same as in clause 10.5.3.0.3.

11.6.3.0.4 Inter-frequency relative SS-SINR measurement accuracy requirements under CCA

Same as in clause 10.5.230.4.

11.6.3.1 NR SA FR1 Intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

11.6.3.1.1 Test purpose

The purpose of this test is to verify that the SS-SINR measurement accuracy on the carrier frequency with CCA is within the specified limits.

11.6.3.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone NR-U and RRM measurements in dynamic channel access or in semi-static channel access and SS-SINR measurements on shared spectrum.

11.6.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.6.3.0.1 for absolute accuracy under CCA.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.3.1.

11.6.3.1.4 Test description

Supported test configurations are shown in Table 11.6.3.1.4.1-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table 11.6.3.1.5-1. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is the target cell with CCA.

11.6.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.3.1.4.1-1.

Table 11.6.3.1.4.1-1: Supported test configurations for NR SA FR1 intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

Configuration	Description
11.6.3.1-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.3.1.4.1-2.

Table 11.6.3.1.4.1-2: Initial conditions for NR SA FR1 intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 11.6.3.1.4.1-1.	
Propagation conditions	AWGN	As specified in clause C.2.2.

Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.3.1.5-1.
2. Message contents are defined in clause 11.6.3.1.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test. All cells are on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model.

11.6.3.1.4.2 Test procedure

1. Ensure the UE is in [state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*], according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
2. Set the parameters according to Table 11.6.3.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform intra-frequency measurements as specified in section 11.6.3.1.4.3.
4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.3.1.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic *MeasurementReport*. The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 11.6.3.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
8. Repeat steps 1-7 for each subtest defined in Table 11.6.3.1.5-1.

11.6.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.3.1.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access H.3.10-2 with Condition SMTC.1 CCA

Table 11.6.3.1.4.3-2: *ReportConfigNR* for NR SA FR1 intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

11.6.3.1.5 Test requirements

Table 11.6.3.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA. Table 11.6.3.1.5-2 defines the absolute accuracy requirements.

Table 11.6.3.1.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

Parameter		**Unit**	**Test 1**		**Test 2**	
			Cell 1	**Cell 2**	**Cell 1**	**Cell 2**
SSB ARFCN			freq1		freq1	
DL CCA model	Config 1		As specified in clause D.7.2.1			
UL CCA model	Config 1		As specified in clause D.7.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1		TDD			
TDD configuration	Config 1		TDDConf.1.1 CCA			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA	

Dedicated CORESET Reference Channel		Config 1		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
DBT Window configuration		Config 1		DBT.1			
Time offset with Cell 1		Config 1	µs	-	3	-	3
SSB configuration		Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration		Config 1		SMTC.1			
PDSCH/PDCCH subcarrier spacing		Config 1	kHz	30			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93.20		-112	
		NR_CCA_FR1_J				-111.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-90.20		-109	
		NR_CCA_FR1_J				-108.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.10	-5.10
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP Note 3	Config 1	NR_CCA_FR1_I	dBm/SCS	-85.65	-87.53	-112.50	-112.50
		NR_CCA_FR1_J				-112	-112
SS-SINR Note3		NR_CCA_FR1_I	dB	0	-3.19	-5.10	-5.10
		NR_CCA_FR1_J					
Io Note3	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.41		-75.41	
		NR_CCA_FR1_J				-74.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.

Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.6.3.1.5-2: Absolute accuracy requirements for the reported values for NR SA FR1 intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	SS-SINR_31	SS-SINR_28
Highest reported value (Cell 3)	SS-SINR_49	SS-SINR_45
Extreme Conditions		
Lowest reported value (Cell 3)	SS-SINR_30	SS-SINR_27
Highest reported value (Cell 3)	SS-SINR_50	SS-SINR_46

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.6.3.2 NR SA FR1 Inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

11.6.3.2.1 Test purpose

The purpose of this test is to verify that the SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA is within the specified limits.

11.6.3.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone NR-U, UL in shared spectrum, RRM measurements in dynamic channel access or in semi-static channel access and SS-SINR measurements on shared spectrum.

11.6.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.6.3.0.3 and 11.6.3.0.4 for absolute and relative accuracy under CCA, correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.3.2.

11.6.3.2.4 Test description

Supported test configurations are shown in Table 11.6.3.2.4.1-1. The absolute accuracy of SS-SINR Inter-frequency measurement is tested by using the parameters in Table 11.6.3.2.5-1. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is the target cell with CCA. The inter-frequency measurements are supported by a measurement gap.

11.6.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.3.2.4.1-1.

Table 11.6.3.2.4.1-1: Supported test configurations for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

Configuration	Description
11.6.3.2-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.3.2.4.1-2.

Table 11.6.3.2.4.1-2: Initial conditions for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.3.2.5-1.
2. Message contents are defined in clause 11.6.3.2.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is the NR neighbour cell also with the power level set according to clauses C.1.2 and C.1.3 for this test. All cells are on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model.

11.6.3.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
2. Set the parameters according to Table 11.6.3.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform inter-frequency measurements as specified in section 11.6.3.2.4.3.
4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.3.2.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic *MeasurementReport*. The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 11.6.3.2.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
8. Repeat steps 1-7 for each subtest defined in Table 11.6.3.2.5-1.

11.6.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.3.2.4.3-1: Common Exception messages for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessTable H.3.10-2 with Condition SMTC.1

Table 11.6.3.2.4.3-2: *ReportConfigNR* for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

11.6.3.2.5 Test requirements

Table 11.6.3.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 Inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA. Table 11.6.3.2.5-2 defines the absolute accuracy requirements.

Table 11.6.3.2.5-1: Cell specific test parameters for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

Parameter		**Unit**	**Test 1**		**Test 2**		**Test 3**	
			Cell 1	**Cell 2**	**Cell 1**	**Cell 2**	**Cell 1**	**Cell 2**
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
DL CCA model	Config 1		As specified in clause D.7.2.1					
UL CCA model	Config 1		As specified in clause D.7.2.2					
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-	0.75	-
Duplex mode	Config 1		TDD					
TDD configuration	Config 1		TDDConf.1.1 CCA					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA	

RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1	µs	-	3	-	3	-	3
DBT Window configuration	Config 1		DBT.1					
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access					
SMTC configuration	Config 1		SMTC.1					
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-88		-108.5		-115.5	
		NR_CCA_FR1_J						-115	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-85		-105.5		-112.5	
		NR_CCA_FR1_J						-112	
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	20	20	-3.2	-3.2
$\hat{E}_s / N_{oc}$			dB	-1.75		20		-3.2	
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	-86.74		-85.49		-115.69	
		NR_CCA_FR1_J						-115.19	
SS-SINR Note3		NR_CCA_FR1_I	dB	-1.75		20		-3.2	
		NR_CCA_FR1_J							
Io Note3	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.72		-54.40		-79.75	
		NR_CCA_FR1_J						-79.25	
Propagation condition			-	AWGN					
Antenna configuration			-	1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.

Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.6.3.2.5-2: Absolute accuracy requirements for the reported values for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

	Test 1	Test 2	Test 3

	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-SINR_35	SS-SINR_79	SS-SINR_32
Highest reported value (Cell 2)	SS-SINR_51	SS-SINR_94	SS-SINR_49
Extreme Conditions			
Lowest reported value (Cell 2)	SS-SINR_33	SS-SINR_77	SS-SINR_31
Highest reported value (Cell 2)	SS-SINR_53	SS-SINR_96	SS-SINR_50

Table 11.6.3.2.5-3: Relative accuracy requirements for the reported values for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA

	Test 1	**Test 2**	**Test 3**
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-SINR_x - 10	SS-SINR_x - 10	SS-SINR_x - 11
Highest reported value (Cell 2)	SS-SINR_x + 10	SS-SINR_x + 10	SS-SINR_x + 11
Extreme Conditions			
Lowest reported value (Cell 2)	SS-SINR_x - 11	SS-SINR_x - 11	SS-SINR_x - 11
Highest reported value (Cell 2)	SS-SINR_x + 11	SS-SINR_x + 11	SS-SINR_x + 11
SS-SINR_x is the reported value of Cell 1			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.6.3.3 NR SA FR1 Intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA

11.6.3.3.1 Test purpose

The purpose of this test is to verify that the SS-SINR measurement accuracy on the carrier frequency with CCA is within the specified limits.

11.6.3.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone 2DL CA NR-U and RRM measurements in dynamic channel access or in semi-static channel access and SS-SINR measurements on shared spectrum, and 2DL CA.

11.6.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.6.3.0.1 for absolute accuracy under CCA.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.3.3.

11.6.3.3.4 Test description

Supported test configurations are shown in Table 11.6.3.3.4.1-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table 11.6.3.3.5-1. In all test cases, Cell 1 is the PCell with CCA, Cell 2 is the Scell with CCA, and Cell 3 is the target cell with CCA.

11.6.3.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.3.3.4.1-1.

Table 11.6.3.3.4.1-1: Supported test configurations for NR SA FR1 intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA

Configuration	**Description**
11.6.3.3-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.3.3.4.1-2.

Table 11.6.3.3.4.1-2: Initial conditions for NR SA FR1 intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.3.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.3.3.5-1.
2. Message contents are defined in clause 11.6.3.3.4.3.
3. Cell 1 is the PCell with CCA, Cell 2 is the SCell with CCA, and Cell 3 is the target cell with CCA, all of which have power levels set according to clauses C.1.2 and C.1.3 for this test. PCell (Cell 1) is on one carrier frequency with CCA, Cell 2 and Cell 3 are both on a different carrier frequency than Cell 1.

11.6.3.3.4.2 Test procedure

1. Ensure the UE is in [state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*], according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
2. Set the parameters according to Table 11.6.3.3.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform intra-frequency measurements as specified in section 11.6.3.3.4.3.
4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.3.3.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic *MeasurementReport*. The SS-SINR value of Cell 3 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 11.6.3.3.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
8. Repeat steps 1-7 for each subtest defined in Table 11.6.3.3.5-1.

11.6.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.3.3.4.3-1: Common Exception messages for NR SA FR1 intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access H.3.10-2 with Condition SMTC.1 CCA

Table 11.6.3.3.4.3-2: *ReportConfigNR* for NR SA FR1 intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

11.6.3.3.5 Test requirements

Table 11.6.3.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 intra-frequency measurement accuracy on SCC on a carrier frequency with CCA. Table 11.6.3.3.5-2 defines the absolute accuracy requirements, correspondingly.

Table 11.6.3.3.5-1: Cell specific test parameters for NR SA FR1 intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA

Parameter		Unit	Test 1		Test 2	
			Cell 1 / Cell 2	Cell 3	Cell 1 / Cell 2	Cell 3
SSB ARFCN			freq1 for Cell 1 freq2 for Cell 2	freq2	freq1 for Cell 1 freq2 for Cell 2	freq2
DL CCA model	Config 1		As specified in clause D.7.2.1			
UL CCA model	Config 1		As specified in clause D.7.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-

Duplex mode		Config 1		TDD			
TDD configuration		Config 1		TDDConf.1.1 CCA			
Downlink initial BWP configuration				DLBWP.0.1			
Downlink dedicated BWP configuration				DLBWP.1.1			
Uplink initial BWP configuration				ULBWP.0.1			
Uplink dedicated BWP configuration				ULBWP.1.1			
DRX Cycle configuration			ms	Not Applicable			
TRS configuration		Config 1		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		Config 1		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
DBT Window configuration		Config 1		DBT.1			
Time offset with Cell 1		Config 1	µs	3 (for Cell 2)	3	3 (for Cell 2)	3
SSB configuration		Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration		Config 1		SMTC.1			
PDSCH/PDCCH subcarrier spacing		Config 1	kHz	30			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93.20		-112	
		NR_CCA_FR1_J				-111.5	
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-90.20		-109	
		NR_CCA_FR1_J				-108.	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.10	-5.10
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP Note 3	Config 1	NR_CCA_FR1_I	dBm/SCS	-85.65	-87.53	-112.50	--112.50
		NR_CCA_FR1_J				-112	-112
SS-SINR Note3		NR_CCA_FR1_I	dB	0	-3.19	-5.10	-5.10
		NR_CCA_FR1_J					
Io Note3	Config 1	NR_CCA_FR1_I	dBm/38.16MHz	-51.41		-75.41	
		NR_CCA_FR1_J				-74.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	NR operating band groups are as defined in clause 3.5.2.
Note 6:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.6.3.3.5-2: Absolute accuracy requirements for the reported values for NR SA FR1 intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	SS-SINR_31	SS-SINR_28
Highest reported value (Cell 3)	SS-SINR_49	SS-SINR_45
Extreme Conditions		
Lowest reported value (Cell 3)	SS-SINR_30	SS-SINR_27
Highest reported value (Cell 3)	SS-SINR_50	SS-SINR_46

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.6.3.4 NR SA FR1 Inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA

Editor's Note:

- MU and TT analysis is incomplete

11.6.3.4.1 Test purpose

The purpose of this test is to verify that the SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA is within the specified limits.

11.6.3.4.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone NR-U and RRM measurements in dynamic channel access or in semi-static channel access and SS-SINR measurements on shared spectrum.

11.6.3.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.6.3.0.3 and 11.6.3.0.4 for absolute and relative accuracy under CCA, correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.3.4.

11.6.3.4.4 Test description

Supported test configurations are shown in Table 11.6.3.4.4.1-1. The absolute accuracy of SS-SINR Inter-frequency measurement is tested by using the parameters in Table 11.6.3.4.5-1. In all test cases, Cell 1 is the PCell with CCA, Cell 2 is the Scell with CCA, and Cell 3 is the target cell with CCA. The inter-frequency measurements are supported by a measurement gap.

11.6.3.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.3.4.4.1-1.

Table 11.6.3.4.4.1-1: Supported test configurations for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA

Config	Description
11.6.3.4-1	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
11.6.3.4-2	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
11.6.3.4-3	Without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 11.6.3.4.4.1-2.

Table 11.6.3.4.4.1-2: Initial conditions for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.3.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.3.4.5-1.
2. Message contents are defined in clause 11.6.3.4.4.3.
3. Cell 1 is the PCell and Cell 2 is target cell with CCA, all of which have power levels set according to clauses C.1.2 and C.1.3 for this test. The two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies, Cell 2 is with CCA and transmit SSBs in DBT windows according to DL CCA model.

11.6.3.4.4.2 Test procedure

1. Ensure the UE is in [state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*], according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
2. Set the parameters according to Table 11.6.3.4.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform inter-frequency measurements as specified in section 11.6.3.4.4.3.
4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.3.4.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.

6. After 10s wait from Step 3, the SS shall check the SS-SINR reported values in the periodic *MeasurementReport*. The SS-SINR value of Cell 3 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 11.6.3.4.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

8. Repeat steps 1-7 for each subtest defined in Table 11.6.3.4.5-1.

11.6.3.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.3.4.4.3-1: Common Exception messages for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access H.3.10-2 with Condition SMTC.1 CCA

Table 11.6.3.4.4.3-2: *ReportConfigNR* for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

11.6.3.4.5 Test requirements

Table 11.6.3.4.5-1 and 11.6.3.4.5-2 define the primary level settings including test tolerances for NR SA FR1 Inter-frequency measurement accuracy on a carrier frequency with CCA. Table 11.6.3.4.5-3 and Table 11.6.3.4.5-4 define the absolute and relative accuracy requirements, correspondingly.

Table 11.6.3.4.5-1: Cell specific test parameters for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA for target cell

Parameter		**Unit**	**Test 1**	**Test 2**	**Test 3**
			Cell 2	**Cell 2**	**Cell 2**
SSB ARFCN			freq2	freq2	freq2
DL CCA model	Config 1		As specified in clause D.7.2.1		
UL CCA model	Config 1		As specified in clause D.7.2.2		

UL CCA probability		P_{CCA_UL}		1.0	
DL CCA probability for semi-static channel access Note 7, 8		P_{CCA_DL}		0.9375	
DL CCA probability for dynamic channel access Note 8, 9		$P_{CCA_DL_1}$		0.75	
		$P_{CCA_DL_2}$		0.75	
Duplex mode		Config 1		TDD	
TDD configuration		Config 1		TDDConf.1.1 CCA	
Downlink initial BWP configuration				DLBWP.0.1	
Downlink dedicated BWP configuration				DLBWP.1.1	
Uplink initial BWP configuration				ULBWP.0.1	
Uplink dedicated BWP configuration				ULBWP.1.1	
DRX Cycle configuration			ms	Not Applicable	
Gap pattern ID				-	
OCNG Patterns				OP.1	
SS-RSSI-Measurement				Not Applicable	
Time offset with Cell 1		Config 1	µs	3	
DBT Window configuration		Config 1		DBT.1	
SSB configuration		Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access	
SMTC configuration		Config 1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		Config 1	kHz	30	
EPRE ratio of PSS to SSS			dB	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-88+TT	-108.5+TT	-115.5+TT
		NR_CCA_FR1_J				-115+TT
N_{oc} Note2	Config 1	NR_CCA_FR1_I	dBm/SCS	-85+TT	-105.5+TT	-112.5+TT
		NR_CCA_FR1_J				-112+TT
$\hat{E}_s / I_{ot}$			dB	-1.75	20	-4.0
$\hat{E}_s / N_{oc}$			dB	-1.75	20	-4.0
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	-86.75+TT	-85.5+TT	-116.5+TT
		NR_CCA_FR1_J				-116+TT
SS-SINR Note3		NR_CCA_FR1_I	dB	-1.75+TT	20+TT	-4.0+TT
		NR_CCA_FR1_J				
Io Note3	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.73	-54.41	-80
		NR_CCA_FR1_J				-79.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 11.6.3.4.5-2: Cell specific test parameters for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA for NR PCell

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 1	Cell 1	Cell 1
SSB ARFCN			freq1	freq1	freq1
Duplex mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
Downlink initial BWP configuration			DLBWP.0.1		
Downlink dedicated BWP configuration			DLBWP.1.1		
Uplink initial BWP configuration			ULBWP.0.1		
Uplink dedicated BWP configuration			ULBWP.1.1		
DRX Cycle configuration		ms	Not Applicable		
Gap pattern ID			0		
TRS configuration	Config 1		TRS.1.1 FDD		
	Config 2		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		
	Config 2		SR.1.1 TDD		
	Config 3		SR2.1 TDD		
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD		
	Config 2		CR.1.1 TDD		
	Config 3		CR2.1 TDD		
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD		
	Config 3		CCR2.1 TDD		
OCNG Patterns			OP.1		
SS-RSSI-Measurement			Not Applicable		
SMTC configuration	Config 1		SMTC pattern 2		
	Config 2,3		SMTC pattern 1		
SSB configuration	Config 1,2		SSB.1 FR1		
	Config 3		SSB.2 FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15		
	Config 3		30		
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					

EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2	Depending on band group NOTE 6	dBm/15 kHz	-88+TT	-108.5+TT	-119.5+ Δ_{BG_offset} +TT
N_{oc} Note2	Config 1,2		dBm/SCS	-88+TT	-108.5+TT	Same as Noc for 15kHz
	Config 3	Depending on band group NOTE 6		-85+TT	-105.5+TT	-116.5+ Δ_{BG_offset} +TT
$\hat{E}_s / I_{ot}$			dB	-1.75	20	-4.0
$\hat{E}_s / N_{oc}$			dB	-1.75	20	-4.0
SS-RSRP Note3	Config 1,2	Depending on band group NOTE 6	dBm/SCS	-89.75+TT	-88.5+TT	-123.5+ Δ_{BG_offset} +TT
	Config 3	Depending on band group NOTE 6		-86.75+TT	-85.5+TT	-120.5+ Δ_{BG_offset} +TT
SS-SINR Note3		Depending on band group NOTE 6	dB	-1.75+TT	20+TT	-4.0+ Δ_{BG_offset} +TT
Io Note3	Config 1,2	Depending on band group NOTE 6	dBm/ 9.36MHz	-57.83	-60.5	-90.09+ Δ_{BG_offset}
	Config 3	Depending on band group NOTE 6	dBm/ 38.16MHz	-51.73	-54.41	-84+ Δ_{BG_offset}
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.
Note 7: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2

Table 11.6.3.4.5-3: Absolute accuracy requirements for the reported values for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest SS-SINR reported value	FFS	FFS	Bands FFS	FFS
			Bands FFS	FFS
			Bands FFS	FFS
			Bands FFS	FFS
Highest SS-SINR reported value	FFS	FFS	Bands FFS	FFS
			Bands FFS	FFS
			Bands FFS	FFS
			Bands FFS	FFS

Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1

Table 11.6.2.4.5-4: Relative accuracy requirements for the reported values for NR SA FR1 inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA from carrier without CCA

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 3)	SINR_x – FFS	SINR_x – FFS	SINR_x – FFS
Highest reported value (Cell 3)	SINR_x – FFS	SINR_x + FFS	SINR_x + FFS
Extreme Conditions			
Lowest reported value (Cell 3)	SINR_x – FFS	SINR_x – FFS	SINR_x – FFS
Highest reported value (Cell 3)	SINR_x – FFS	SINR_x + FFS	SINR_x + FFS
SINR_x is the reported value of Cell 2			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.6.4 L1-RSRP measurement accuracy for beam reporting with CCA serving cell

11.6.4.0 Minimum conformance requirements

11.6.4.0.1 Minimum conformance requitements for SSB-based L1-RSRP measurement accuracy for beam reporting under CCA

Same as in clause 10.5.4.0.1.

11.6.4.1 NR SA FR1 SSB based L1-RSRP measurement accuracy with CCA

11.6.4.1.1 Test purpose

The purpose of this test is to verify that the SSB based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

11.6.4.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting EN-DC FR1 with a shared spectrum NR carrier, RRM measurements and UL with a shared spectrum NR carrier.

11.6.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.6.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.4.1.

11.6.4.1.4 Test description

There is one cell in the test, PCell, which operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test configurations and parameters for the Cell 2 are given in Table 11.6.4.1.4.1-1. Two sub-tests (Test 1 and Test 2) are provided with different N_{oc} on Cell 1. The absolute and relative accuracy of L1-RSRP measurements is tested by using the parameters in Table 11.6.4.1.5-2 and Table 11.6.4.1.5-3 respectively.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

11.6.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.4.1.4.1-1.

Table 11.6.4.1.4.1-1: Supported test configurations for NR SA FR1 SSB based L1-RSRP measurement accuracy with CCA

Configuration	Description
11.6.4.1-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.4.1.4.1-2. Test environment parameters are given in Table 11.6.4.1.4.1-2.

Table 11.6.4.1.4.1-2: Test Environment parameters for NR SA FR1 SSB based L1-RSRP measurement accuracy with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.4.1.5-1.
2. Message contents are defined in clause 11.6.4.1.4.3.
3. Cell 1 is the PCell with CCA and transmits SSBs in DBT windows according to DL CCA model. The power levels are set according to clauses C.1.2 and C.1.3 for this test.
4. There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

11.6.4.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1). The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.
2. Set the parameters according to Test 1 in Table 11.6.4.1.5-1 and enable DL and UL CCA model according to the same table. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in Table 11.6.4.1.5-1.
3. The UE shall start sending L1-RSRP report including results of both SSB#0 and SSB#1 every 80 slots.
4. The SS shall check following requirements:

R1: The SS shall check the L1-RSRP reported values of SSB#0 or SSB#1 in the periodic L1-RSRP reports. If the value for the strongest SSB is within the limits in Table 11.6.4.1.5-2, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

R2: The SS shall check the L1-RSRP reported values of SSB#0 and SSB#1 in the periodic L1-RSRP reports. The DIFF-RSRP value of SSB#0 or SSB#1 reported by the UE is compared to the expected DIFF-RSRP. If the DIFF-RSRP value is within the limits in Table 11.6.4.1.5-3, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

5. The SS shall continue checking the L1-RSRP report messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

6. Set the parameters according Test 2 in Table 11.6.4.1.5-1 and repeat steps 3-5.

11.6.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.4.1.4.3-1: Common Exception messages for NR SA FR1 SSB based L1-RSRP measurement accuracy with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10 Table H.3.4-1 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 11.6.4.1.4.3-2: *RadioLinkMonitoringConfig* for NR SA FR1 SSB based L1-RSRP measurement accuracy with CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

11.6.4.1.5 Test requirement

Table 11.6.4.1.5-1 defines the primary level settings for all tests for NR SA FR1 SSB based L1-RSRP measurement accuracy with CCA. In both Test 1 and Test 2, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 11.6.4.0.1 while meeting the corresponding absolute accuracy requirements in Table 11.6.4.1.5-2, and the corresponding relative accuracy requirements in Table 11.6.4.1.5-3 for all test configurations.

Table 11.6.4.1.5-1: Test parameters for NR SA FR1 SSB based L1-RSRP measurement accuracy with CCA

Parameter		Config	Unit	Test 1	Test 2
SSB GSCN		1		freq1	freq1
DL CCA model		1		As specified in D.7.2.1	As specified in D.7.2.1
UL CCA model		1		As specified in D.7.2.2	As specified in D.7.2.2
Duplex mode		1		TDD	TDD
TDD configuration		1		TDDConf.1.1 CCA	TDDConf.1.1 CCA
$BW_{channel}$		1	MHz	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
PDSCH Reference measurement channel		1		SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel		1		CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel		1		CCR.1.1 CCA	CCR.1.1 CCA
SSB configuration Semi-static channel access		1		SSB.3 CCA	SSB.3 CCA
SSB configuration for Dynamic channel access		1		SSB.4 CCA	SSB.4 CCA
OCNG Patterns		1		OP.1	OP.1
Initial BWP Configuration		1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
TRS configuration		1		TRS.1.2 TDD	TRS.1.2 TDD
Dedicated BWP configuration		1		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
DBT Window Configuration		1		DBT.1	DBT.1
reportConfigType		1		periodic	periodic
reportQuantity		1		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS		1		2	2
L1-RSRP reporting period		1		slot80	slot80
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1		1	dB	0	0
N_{oc} Note2	NR_TDD_FR1_I	1	dBm/15kHz	-96	-113
N_{oc} Note2	NR_TDD_FR1_I	1	dBm/SCS	-93	-110
$\hat{E}_s / I_{ot}$		1	dB	10	-2.2
SS-RSRP Note3	NR_TDD_FR1_I	1	dBm/SCS	-82.99	-112.19
Io Note3	NR_TDD_FR1_I	1	dBm/ 38.16MHz	-51.53	-76.90
$\hat{E}_s / N_{oc}$		1	dB	10	-2.2
Propagation condition		1		AWGN	AWGN
Antenna configuration		1		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 11.6.4.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 1)	63	Bands NR_CCA_FR1_I	38
		Bands NR_CCA_FR1_J	38
Highest reported value (Cell 1)	84	Bands NR_CCA_FR1_I	51
		Bands NR_CCA_FR1_J	51
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	60	Bands NR_CCA_FR1_I	33
		Bands NR_CCA_FR1_J	33
Highest reported value (Cell 1)	87	Bands NR_CCA_FR1_I	56
		Bands NR_CCA_FR1_J	56
NOTE: NR operating band groups are defined in clause 3A.4.1, Table 3A.4.1-1			

Table 11.6.4.1.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

	Test 1	Test 2
	All bands	**All bands**
Normal Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2
Extreme Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

11.6.5 RSSI

11.6.5.0 Minimum Conformance Requirements

11.6.5.0.1 Intra-frequency absolute RSSI measurement accuracy requirements in FR1

Same as in clause 10.5.5.0.1.

11.6.5.0.2 Inter-frequency absolute RSSI measurement accuracy requirements in FR1

Same as in clause 10.5.5.0.2.

11.6.5.1 NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA

11.6.5.1.1 Test purpose

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits.

11.6.5.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone NR-U and supporting RRM and RSSI measurements on shared channel access.

11.6.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.6.5.0.1 for absolute accuracy under CCA.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.5.1.

11.6.5.1.4 Test description

Supported test configurations are shown in Table 11.6.5.1.4.1-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table 11.6.5.1.5-1 and Table 11.6.5.1.5-2. In all test cases, Cell 1 is the PCell with CCA. RSSI is measured on channel number 1.

11.6.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.5.1.4.1-1.

Table 11.6.5.1.4.1-1: Supported test configurations for NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA

Configuration	Description
11.6.5.1-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.5.1.4.1-2.

Table 11.6.5.1.4.1-2: Initial conditions for NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.5.1.5-1.
2. Message contents are defined in clause 11.6.5.1.4.3.
3. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. CCA and transmit SSBs in DBT windows according to DL CCA model.

11.6.5.1.4.2 Test procedure

1. Ensure the UE is in [state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*], according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
2. Set the parameters according to Table 11.6.5.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform RSSI measurements according to the RMTC specified in section 11.6.5.1.4.3.
4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.5.1.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 3, the SS shall check the RSSI reported values in the periodic *MeasurementReport*. The RSSI value of Cell 2 reported by the UE is compared to the expected RSSI. If the value is outside the limits in Table 11.6.5.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
8. Repeat steps 1-7 for each subtest defined in Table 11.6.5.1.5-1.

11.6.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.5.1.4.3-1: Common Exception messages for NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO and RSSITable H.3.1-4 with Condition RSSI Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-3 with condition RSSI

Table 11.6.5.1.4.3-2: *MeasResults* for NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		

measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 11.6.5.1.4.3-3: *MeasResultForRSSI* for EN-DC FR1 RSSI measurement accuracy for PCC under CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
rssi-Result-r16	measResultRSSI	RSSI-Range-r16, integer (0..76)	RSSI

11.6.5.1.5 Test requirements

Table 11.6.5.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA. Table 11.6.5.1.5-2 defines the RSSI measurement time configuration (RMTC). Table 11.6.5.1.5-3 defines the absolute accuracy requirements.

Table 11.6.5.1.5-1: Cell specific test parameters for NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA

Parameter			**Unit**	**Test 1**
				Cell 1
RF Channel Number				1
$BW_{channel}$			MHz	40
SSB configuration	Semi-static channel access Note 1, 3	Config 1		SSB.1 CCA
	Dynamic channel access Note 2, 3	Config 1		SSB.2 CCA
P_{CCA_DL}				0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P_{CCA_UL}				0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
DL CCA model				As specified in clause D.7.2.1
UL CCA model				As specified in clause D.7.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth
Channel access bandwidth			MHz	20
DRX Cycle configuration			ms	Not Applicable
PDSCH Reference measurement channel				SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA
OCNG Patterns				OP.1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				

N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)	dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)	dBm/SCS	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)	dB	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)	dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)	dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)		-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)	dBm/BW	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)	dBm/BW	-58.96
Propagation condition	-	AWGN
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.		

11.6.5.1.5-2: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

Table 11.6.5.1.5-3: Absolute accuracy requirements for the reported values for NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA

Normal Conditions	**Test 1 All bands**
Lowest RSSI reported value	35
Highest RSSI reported value	49
Extreme Conditions	**Test 1 All bands**
Lowest RSSI reported value	32
Highest RSSI reported value	52
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1	

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

11.6.5.2 NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA

11.6.5.2.1 Test purpose

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits.

11.6.5.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting standalone 2DL CA NR-U and supporting RRM and RSSI measurements on shared channel access.

11.6.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.6.5.0.1 for absolute accuracy under CCA.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.5.2.

11.6.5.2.4 Test description

Supported test configurations are shown in Table 11.6.5.2.4.1-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table 11.6.5.2.5-1 and Table 11.6.5.2.5-2. Cell 1 which is PCell operating on a carrier frequency under CCA, and Cell 2 which is SCell operating on a carrier frequency under CCA. RSSI is measured on channel number 2.

11.6.5.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.5.2.4.1-1.

Table 11.6.5.2.4.1-1: Supported test configurations for NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA

Configuration	Description
11.6.5.2-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.5.2.4.1-2.

Table 11.6.5.2.4.1-2: Initial conditions for NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.5.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.5.2.5-1.
2. Message contents are defined in clause 11.6.5.2.4.3.
3. Cell 1 is the NR PCell, Cell 2 is the SCell, all of which have power levels set according to clauses C.1.2 and C.1.3 for this test. All cells are on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model.

11.6.5.2.4.2 Test procedure

1. Ensure the UE is in [state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*], according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
2. Set the parameters according to Table 11.6.5.2.5-1 as appropriate.

3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform RSSI - measurements according to the RMTC specified in section 11.6.5.2.4.3.

4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.5.2.5-1.

5. The UE shall transmit periodical *MeasurementReport* messages.

6. After 10s wait from Step 3, the SS shall check the RSSI reported values in the periodic *MeasurementReport*. The RSSI value of Cell 2 reported by the UE is compared to the expected RSSI. If the value is outside the limits in Table 11.6.5.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

8. Repeat steps 1-7 for each subtest defined in Table 11.6.5.2.5-1.

11.6.5.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.5.2.4.3-1: Common Exception messages for NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-3 with condition RSSI

Table 11.6.5.2.4.3-2: *MeasResults* for NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 11.6.5.2.4.3-3: *MeasResultForRSSI* for NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			

rssi-Result-r16	measResultRSSI	RSSI-Range-r16, integer (0..76)	RSSI

11.6.5.2.5 Test requirements

Table 11.6.5.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA. Table 11.6.5.2.5-2 defines the RSSI measurement time configuration (RMTC). Table 11.6.5.2.5-3 defines the absolute accuracy requirements.

Table 11.6.5.2.5-1: Cell specific test parameters for NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA

Parameter			Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	Config 1		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	Config 1		SSB.2 CCA	SSB.2 CCA
P_{CCA_DL}				1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P_{CCA_UL}				1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in A.3.20.2.1
UL CCA model				N/A	As specified in A.3.20.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)				-103.5	-Infinity

Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)	dBm/BW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)	dBm/BW	-77.96	-58.96
Propagation condition	-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2 For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

11.6.5.2.5-2: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

Table 11.6.5.2.5-3: Absolute accuracy requirements for the reported values for NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA

Normal Conditions	**Test 1 All bands**
Lowest RSSI reported value	35
Highest RSSI reported value	49
Extreme Conditions	**Test 1 All bands**
Lowest RSSI reported value	32
Highest RSSI reported value	52
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1	

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

11.6.5.3 NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA

11.6.5.3.1 Test purpose

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits.

11.6.5.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting inter-frequency RRM and RSSI measurements on shared channel access.

11.6.5.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.6.5.0.2 for absolute accuracy under CCA.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.5.3.

11.6.5.3.4 Test description

Supported test configurations are shown in Table 11.6.5.3.4.1-1. The absolute accuracy of RSSI inter-frequency measurements is tested by using the parameters in Table 11.6.5.3.5-1 and Table 11.6.5.3.5-2 Cell 1 is the PCell with CCA and Cell 2 is the neighbor cell with CCA. RSSI is measured on channel number 2. The inter-frequency measurements are supported by a measurement gap.

11.6.5.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.5.3.4.1-1.

Table 11.6.5.3.4.1-1: Supported test configurations for NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA

Configuration	Description
11.6.5.3-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.5.3.4.1-2.

Table 11.6.5.3.4.1-2: Initial conditions for NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.5.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.5.3.5-1.
2. Message contents are defined in clause 11.6.5.3.4.3.
3. Cell 1 is the NR PCell with CCA, Cell 2 is the neighbor with CCA, all of which have power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is on a different frequency than Cell 1, both cells with CCA and transmit SSBs in DBT windows according to DL CCA model.

11.6.5.3.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
2. Set the parameters according to Table 11.6.5.3.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform inter-frequency measurements, according to the RMTC specified in section 11.6.5.3.4.3.
4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.5.3.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 3, the SS shall check the RSSI reported values in the periodic *MeasurementReport*. The RSSI value of Cell 2 reported by the UE is compared to the expected RSSI. If the value is outside the limits in Table 11.6.5.3.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

11.6.5.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.5.3.4.3-1: Common Exception messages for NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access Table H.3.10-3 with condition RSSI

Table 11.6.5.3.4.3-2: *MeasResults* for NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 11.6.5.2.4.3-3: *MeasResultForRSSI* for NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
rssi-Result-r16	measResultRSSI	RSSI-Range-r16, integer (0..76)	RSSI

11.6.5.3.5 Test requirements

Table 11.6.5.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA. Table 11.6.5.3.5-2 defines the RSSI measurement time configuration (RMTC). Table 11.6.5.3.5-3 defines the absolute accuracy requirements.

Table 11.6.5.3.5-1: Cell specific test parameters for NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA

Parameter	Unit	Test 1	
		Cell 1	Cell 2
RF Channel Number		1	2
$BW_{channel}$	MHz	40	40

SSB configuration	Config 1		SSB.1 CCA for semi-static channel access Note 1, 3 SSB.2 CCA for dynamic channel access Note 2, 3	
P_{CCA_DL}			1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P_{CCA_UL}			1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model			N/A	As specified in clause D.7.2.1
UL CCA model			N/A	As specified in clause D.7.2.2
Measurement bandwidth		n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth		MHz	20	
DRX Cycle configuration		ms	Not Applicable	
PDSCH Reference measurement channel			SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel			CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel			CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns			OP.1	OP.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI		dBm/BW	-77.96	-58.96

measurement time configuration (RMTC)			
Propagation condition	-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

11.6.5.3.5-2: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

Table 11.6.5.3.5-3: Absolute accuracy requirements for the reported values for NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA

Normal Conditions	**Test 1** **All bands**
Lowest RSSI reported value	35
Highest RSSI reported value	49
Extreme Conditions	**Test 1** **All bands**
Lowest RSSI reported value	32
Highest RSSI reported value	52
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1	

For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

11.6.6 Channel occupancy

11.6.6.0 Minimum Conformance Requirements

11.6.6.0.1 Intra-frequency channel occupancy measurement accuracy requirements in FR1

Same as in clause 10.5.6.0.1.

11.6.6.0.2 Inter-frequency channel occupancy measurement accuracy requirements in FR1

Same as in clause 10.5.6.0.2.

11.6.6.1 NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA

11.6.6.1.1 Test purpose

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits.

11.6.6.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone NR-U and supporting RRM and Channel occupancy measurements on shared channel access.

11.6.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 11.6.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.6.1.

11.6.6.1.4 Test description

Supported test configurations are shown in Table 11.6.6.1.4.1-1. The absolute accuracy of intra-frequency channel occupancy measurement is tested by using the parameters in Table 11.6.6.1.5-1 and Table 11.6.6.1.5-2. Cell 1 is the PCell with CCA.

11.6.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.6.1.4.1-1.

Table 11.6.6.1.4.1-1: Supported test configurations for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA

Configuration	Description
11.6.6.1-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.6.1.4.1-2.

Table 11.6.6.1.4.1-2: Initial conditions for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.6.1.5-1.
2. Message contents are defined in clause 11.6.6.1.4.3.
3. Cell 1 is the PCell with CCA and transmits SSBs in DBT windows according to DL CCA model. The power levels are set according to clauses C.1.2 and C.1.3 for this test.

11.6.6.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
2. Set the parameters according to Table 11.6.6.1.5-1 as appropriate.

3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform Channel occupancy measurements according to the RMTC specified in section 11.6.6.1.4.3.

4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.6.1.5-1.

5. The UE shall transmit periodical *MeasurementReport* messages.

6. After 10s wait from Step 3, the SS shall check the Channel occupancy reported values in the periodic *MeasurementReport*. If the Channel occupancy value of Cell 1 reported by the UE is less than 100%, or the UE fails to report the measurement value for Cell 1, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

11.6.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.6.1.4.3-1: Common Exception messages for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI and channelOccupancyThreshold set to 18 (value of -83dBm) Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access Table H.3.10-3 with condition Channel_Occupancy

Table 11.6.6.1.4.3-2: *MeasResults* for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 11.6.6.1.4.3-3: *MeasResultForRSSI* for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
channelOccupancy-r16	measResultChannelOccupancy	Integer (0..100)	Channel_Occupancy

11.6.6.1.5 Test requirements

Table 11.6.6.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA.

Table 11.6.6.1.5-1: Cell specific test parameters for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA

Parameter		Unit	Test 1 Cell 1
RF Channel Number			1
$BW_{channel}$		MHz	40
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access Note 1, 3 SSB.2 CCA for dynamic channel access Note 2, 3
P_{CCA_DL}			0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P_{CCA_UL}			0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model			As specified in clause D.7.2.1
UL CCA model			As specified in clause D.7.2.2
Measurement bandwidth		n_{PRB}	Same as channel access bandwidth
Channel access bandwidth		MHz	20
DRX Cycle configuration		ms	Not Applicable
PDSCH Reference measurement channel			SR.1.1 CCA
RMSI CORESET Reference Channel			CR.1.1 CCA
Dedicated CORESET Reference Channel			CCR.1.1 CCA
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5
$\hat{E}_s / I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/BW	-58.96
Propagation condition		-	AWGN
channelOccupancyThreshold		dBm	-83

Note 1:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 2:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 3:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 11.6.6.1.5-2: EN-DC FR1 Channel occupancy RMTC parameters for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

The nominal reported *channelOccupancy* shall be 100%. For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

11.6.6.2 NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

11.6.6.2.1 Test purpose

The purpose of this test is to verify that the channel occupancy measurement accuracy for SCC is within the specified limits.

11.6.6.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone 2DL CA NR-U and supporting RRM and Channel occupancy measurements on shared channel access.

11.6.6.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.6.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.6.2.

11.6.6.2.4 Test description

Supported test configurations are shown in Table 11.6.6.2.4.1-1. The absolute accuracy of intra-frequency channel occupancy measurement is tested by using the parameters in Table 11.6.6.2.5-1 and Table 11.6.6.2.5-2. Cell 1 is the PCell with CCA, and Cell 2 is SCell with CCA.

11.6.6.2.4.1 Initial conditions

Table 11.6.6.2.4.1-1: Supported test configurations for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

Configuration	Description
11.6.6.1-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.6.2.4.1-2.

Table 11.6.6.2.4.1-2: Initial conditions for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.6.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.6.2.5-1.
2. Message contents are defined in clause 11.6.6.2.4.3.
3. Cell 1 is the PCell with CCA, Cell 2 is the SCell with CCA, all of which have power levels set according to clauses C.1.2 and C.1.3 for this test. All cells are on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model.

11.6.6.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
2. Set the parameters according to Table 11.6.6.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform Channel occupancy measurements in the target SCC frequency, according to the RMTCspecified in section 11.6.6.2.4.3.
4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.6.2.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 3, the SS shall check the Channel occupancy reported values in the periodic *MeasurementReport*. If the Channel occupancy value of Cell 2 reported by the UE is less than 100%, or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

11.6.6.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.6.2.4.3-1: Common Exception messages for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI and channelOccupancyThreshold set to 18 (value of -83dBm) Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-3 with condition Channel_Occupancy

Table 11.6.6.2.4.3-2: *MeasResults* for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 11.6.6.2.4.3-3 *MeasResultForRSSI* for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
channelOccupancy-r16	measResultChannelOccupancy	Integer (0..100)	Channel_Occupancy

11.6.6.2.5 Test requirements

Table 11.6.6.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA.

Table 11.6.6.2.5-1: Cell specific test parameters for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

Parameter		**Unit**	**Test 1**	
			Cell 1	**Cell 2**
RF Channel Number			1	2
$BW_{channel}$		MHz	40	40
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access Note 1, 3 SSB.2 CCA for dynamic channel access Note 2, 3	
P_{CCA_DL}			1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P_{CCA_UL}			1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model			N/A	As specified in clause D.7.2.1
UL CCA model			N/A	As specified in clause D.7.2.2

Measurement bandwidth	n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth	MHz	20	
DRX Cycle configuration	ms	Not Applicable	
PDSCH Reference measurement channel		SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel		CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel		CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns		OP.1	OP.1
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)	dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)	dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)	dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)	dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)	dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)		-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)	dBm/BW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)	dBm/BW	-77.96	-58.96
Propagation condition	-	AWGN	
channelOccupancyThreshold	dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table 11.6.6.2.5-2: EN-DC FR1 Channel occupancy RMTC parameters for NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

The nominal reported *channelOccupancy* shall be 100%. For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

11.6.6.3 NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

11.6.6.3.1 Test purpose

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits.

11.6.6.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting standalone standalone NR-U and supporting inter-frequency RRM and Channel occupancy measurements on shared channel access.

11.6.6.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 11.6.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.11.6.6.3.

11.6.6.3.4 Test description

Supported test configurations are shown in Table 11.6.6.3.4.1-1. The absolute accuracy of inter-frequency channel occupancy measurement is tested by using the parameters in Table 11.6.6.3.5-1 and Table 11.6.6.3.5-2. Cell 1 is the PCell with CCA and Cell 2 is the neighbor cell with CCA. The inter-frequency measurements are supported by a measurement gap.

11.6.6.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 11.6.6.3.4.1-1.

Table 11.6.6.3.4.1-1: Supported test configurations for NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

Configuration	Description
11.6.6.3-1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 11.6.6.3.4.1-2.

Table 11.6.6.3.4.1-2: Initial conditions for NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.9-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 11.6.6.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	LTE link is not used in this test		

1. The general test parameter settings are set up according to Table 11.6.6.3.5-1.

2. Message contents are defined in clause 11.6.6.3.4.3.

3. Cell 1 is the NR PCell with CCA, Cell 2 is the neighbor with CCA, all of which have power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 2 is on a different frequency than Cell 1.

11.6.6.3.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).

2. Set the parameters according to Table 11.6.6.3.5-1 as appropriate.

3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 configuring the UE to perform channel occupancy measurements in the target neighbouring frequency, according to the RMTCspecified in section 11.6.6.3.4.3.

4. The UE shall transmit an *RRCReconfiguration* message to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 11.6.6.3.5-1.

5. The UE shall transmit periodical *MeasurementReport* messages.

6. After 10s wait from Step 3, the SS shall check the Channel occupancy reported values in the periodic *MeasurementReport*. If the Channel occupancy value of Cell 2 reported by the UE is less than 100%, or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

11.6.6.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 11.6.6.3.4.3-1: Common Exception messages for NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI and channelOccupancyThreshold set to 18 (value of -83dBm) Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-3 with condition Channel_Occupancy

Table 11.6.6.3.4.3-2: *MeasResults* for NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		

}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 11.6.6.3.4.3-3: *MeasResultForRSSI* for EN-DC FR1 RSSI measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
channelOccupancy-r16	measResultChannelOccupancy	Integer (0..100)	Channel_Occupancy

11.6.6.3.5 Test requirements

Table 11.6.6.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

Table 11.6.6.3.5-1: Cell specific test parameters for NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

Parameter		**Unit**	**Test 1**	
			Cell 1	**Cell 2**
RF Channel Number			1	2
$BW_{channel}$		MHz	40	40
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access Note 1, 3 SSB.2 CCA for dynamic channel access Note 2, 3	
P_{CCA_DL}			1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P_{CCA_UL}			1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model			N/A	As specified in clause D.7.2.1
UL CCA model			N/A	As specified in clause D.7.2.2
Measurement bandwidth		n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth		MHz	20	
DRX Cycle configuration		ms	Not Applicable	
PDSCH Reference measurement channel			SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel			CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel			CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns			OP.1	OP.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/ SCS	-106	-106

N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)	dBm/ SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)	dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)	dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)	dBm/ SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)		-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)	dBm/ BW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)	dBm/ BW	-77.96	-58.96
Propagation condition	-	AWGN	
channelOccupancyThreshold	dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table 11.6.6.3.5-2: EN-DC FR1 Channel occupancy RMTC parameters for NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

The nominal reported *channelOccupancy* shall be 100%. For the test to pass, the ratio of successful reported values shall be more than 90% with a confidence level of 95%.

12 E-UTRA Standalone Tests with at Least One NR Cell under CCA

12.1 RRC_IDLE State Mobility

12.1.1 Inter-RAT cell re-selection to NR on a carrier frequency with CCA

12.1.1.0 Minimum Conformance Requirements

12.1.1.0.1 Minimum conformance requitements for Inter-RAT cell re-selection to NR on a carrier frequency with CCA

The UE shall be able to identify new inter-RAT cells subject to CCA and perform SS-RSRP or SS-RSRQ measurements of identified inter-RAT cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-RAT layers of higher priority at least every $T_{higher_priority_search}$.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-RAT layers of higher, lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this subclause.

The UE shall be able to evaluate whether a newly detectable inter-RAT cell meets the reselection criteria defined in TS38.304 [30] within $K_{carrier} * T_{detect,NR_Inter} + K_{carrier_CCA} * T_{detect,NR_Inter_CCA}$ if at least carrier frequency information is provided for inter-RAT neighbour cells by the serving cells when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 6dB in FR1 for SS-RSRP reselections based on absolute priorities or 4dB in FR1 for SS-RSRQ reselections based on absolute priorities.

The parameter $K_{carrier}$ is the number of NR inter-RAT carriers on licensed band and $K_{carrier_CCA}$ is the number of NR inter-RAT carriers on unlicensed band indicated by the serving cell. An inter-RAT cell is considered to be detectable according to the conditions defined in Annex B.x.y for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter_CCA}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this section shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier} * T_{measure,NR_Inter} + K_{carrier_CCA} * T_{measure,NR_Inter_CCA}$ (see table 12.1.1.0.1-1) for identified lower priority inter-RAT cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

For a cell that is already identified, after 2 unsuccessful measurement attempts due to exceeding the maximum number of SMTC occasions not available at the UE, the UE shall detect cells on any of the configured serving- and/or non-serving carriers.

In the requirements of clause 12.1.1.0.1, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the *N* candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding detection, measurement, or evaluation period, where:

- For the cell detection procedure: *N* is at least one candidate SSB position (NOTE: the one candidate SSB position for the cell detection shall not be impacted by the set of candidate SSB positions which are already being measured by the UE within the current measurement period of the on-going measurements), and

- For other procedures in clause 12.1.1.0.1: *N* are the first two successive candidate SSB positions when two or more candidate SSB positions are configured for this SSB index in one discovery burst transmission window, otherwise N is one candidate SSB position;

otherwise the SMTC occasion is considered as available at the UE.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher and lower priority inter-RAT cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter_CCA}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-RAT cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-RAT cell has met reselection criterion defined TS 38.304 [30] within $K_{carrier} * T_{evaluate,NR_Inter} + K_{carrier_CCA} * T_{evaluate,NR_Inter_CCA}$ when $T_{reselection} = 0$ as specified in table 12.1.1.0.1-1 if eDRX_IDLE cycle is not configured, provided that the reselection criteria is met by

- 6dB in FR1 for SS-RSRP reselections based on absolute priorities or

- 4dB in FR1 for SS-RSRQ reselections based on absolute priorities.

If $T_{reselection}$ timer has a non zero value and the inter-RAT cell is satisfied with the reselection criteria, the UE shall evaluate this inter-RAT cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

Table 12.1.1.0.1-1: T_{detect,NR_Inter_CCA}, $T_{measure,NR_Inter_CCA}$ and $T_{evaluate,NR_Inter_CCA}$

DRX cycle length [s]	T_{detect,NR_Inter_CCA} [s] (number of DRX cycles)	$T_{measure,NR_Inter_CCA}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_CCA}$ [s] (number of DRX cycles)
0.32	0.32x([36]+M_d) {([36]+ M_d) }	0.32x([4]+M_m) {([4]+ M_m) }	0.32x([16]+M_e) {([16]+ M_e) }
0.64	0.64x([28]+ M_d) {[28]+ M_d }	0.64x([2]+ M_m) {[2]+ M_m }	0.64x([8]+ M_e) {[8]+ M_e }
1.28	1.28x([25]+ M_d) {[25]+ M_d }	1.28x([1]+ M_m) {[1]+ M_m }	1.28x([5]+ M_e) {[5]+ M_e }
2.56	2.56x([23]+ M_d) {[23]+ M_d }	2.56x([1]+ M_m) {[1]+ M_m }	2.56x([3]+ M_e) {[3]+ M_e }
Note 1:	Md, Mm, Me are the number of DRX cycles each with at least one SMTC occasion not available at the UE during the $T_{detect,NR_Inter_CCA,}$, $T_{measure,NR_Inter_CCA}$ and $T_{evaluate,NR_Inter_CCA}$, respectively. $M_{m,max}$, $M_{d,max}$ and $M_{e,max}$ are the maximum values of M_m, M_d and M_e, respectively.		
Note 2:	$M_m \leq M_{m,max}$, where: $M_{m,max}$ = [16] for DRX cycle = 0.32 seconds, $M_{m,max}$ = [8] for DRX cycle = 0.64 seconds, $M_{m,max}$ = [4] for DRX cycle = 1.28 seconds, $M_{m,max}$ = [4] for DRX cycle = 2.56 seconds,		
Note 3:	$M_d \leq M_{d,max}$, where: $M_{d,max}$ = [4] * $M_{m,max}$,		
Note 4:	$Me \leq M_{e,max}$, where: $M_{e,max}$ = [2] * $M_{m,max}$,		

The UE shall restart the measurements upon exceeding $M_{m,max}$, $M_{d.max}$, or $M_{e,max}$.

The normative reference for this requirement is TS 36.133 [23] clause 4.2.2.5.7.

12.1.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA

12.1.1.1.1 Test purpose

This test is to verify the requirement for the E-UTRAN to NR inter-RAT cell subject to CCA reselection requirements specified in clause 12.1.1.0.1.

12.1.1.1.2 Test applicability

This test applies to all E-UTRA UE release 16 and forward, supporting RRM measurements on a shared spectrum NR carrier, supporting standalone NR-U, RRM measurements and UL with a shared spectrum NR carrier.

12.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 12.1.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.12.1.1.1.

12.1.1.1.4 Test description

12.1.1.1.4.1 Initial conditions

This test shall be tested under any of the test configuration in Table 12.1.1.1.4.1-1.

Table 12.1.1.1.4.1-1: Supported test configurations for E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA

Configuration	Description of a cell without CCA	Description of a cell with CCA
12.1.1.1-1	LTE FDD	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
12.1.1.1-2	LTE TDD	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations		

Configure the test requirement and the DUT according to the parameters in Table 12.1.1.1.4.1-2.

Table 12.1.1.1.4.1-2: Initial conditions for E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.10-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 12.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 12.1.1.1.4.1-3.
2. Message contents are defined in clause 12.1.1.1.4.3.
3. The test scenario comprises of one NR cell and one E-UTRAN cell. NR Cell 2 is the PCell subject to CCA and E-UTRA Cell 1 is the neighbour cell. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clauses C.1.0 and C.1.1 and NR Cell 2 is configured according to clauses C.1.1 and C.1.2.

Table 12.1.1.1.4.1-3: General test parameters for E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell 2	The UE camps on Cell 2 in the initial phase
	Neighbour cell		1, 2	Cell 1	
T1 end condition	Active cell			Cell 1	During T1 period the UE reselects to Cell 1
	Neighbour cell			Cell 2	

T3 end condition	Active cell		1, 2	Cell 2	The UE shall perform reselection to Cell 2 during T3
	Neighbour cell		1, 2	Cell 1	
RF Channel Number			1, 2	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
DBT Window Configuration			1, 2	DBT.1	As specified in clause A.12.1.
DL CCA model			1, 2	As specified in clause D.7.2.1	DL CCA model
UL CCA model			1, 2	As specified in clause D.7.2.2	UL CCA model
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
T1		s	1, 2	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2	>7	During T2, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	1, 2	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

12.1.1.1.4.2 Test procedure

Two cells are deployed in the test, which are one NR PCell (NR Cell 2) subject to CCA and a E-UTRA neighbour cell (E-UTRA Cell 1). The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. E-UTRA Cell 1 is already identified by the UE prior to the start of the test. NR Cell 2 is of higher priority than E-UTRA Cell 1. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure.

1. The SS shall send a *RRCRelease* message on NR Cell 2 to ensure the UE is in State RRC_IDLE with generic procedure parameters connectivity = *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

2. The SS shall set the parameters according to T1 in Table 12.1.1.1.5-1 and 12.1.1.1.5-2 at the same time instance *RRCRelease* message is sent on NR Cell 2, The SS shall enable DL and UL CCA model according to Table 12.1.1.1.5-1. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, E-UTRA Cell 1.

4. If the UE responds on lower priority cell, E-UTRA Cell 1 during time duration T1 within 8 seconds from the beginning of time period T1, then count a success for the event "Re-select lower priority Cell 1". Otherwise count a fail for the event "Re-select lower priority Cell 1".

5. If the UE has re-selected E-UTRA Cell 1 within T1, after the re-selection or when T1 expires, continue with step 5a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE, disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1) and skip to step 1.

5a. The SS shall send an *RRCConnectionRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 12.1.1.1.5-1. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) shall be changed to ensure Cell 2 is not detected by the UE. T2 starts.

7. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 12.1.1.1.5-1, T3 starts.

8. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, NR Cell 2.

9. If the UE responds on higher priority cell, NR Cell 2 during time duration T3 within 68 seconds from the beginning of time period T3, then count a success for the event "Re-select higher priority Cell 2". Otherwise count a fail for the event "Re-select higher priority Cell 2".

10. If the UE has re-selected Cell 2 within T3, after the re-selection or when T3 expires, continue with step 11. Otherwise, if T3 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE, disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1) and continue with step 1.

11. The SS shall send an *RRCRelease* message on NR Cell 2 to ensure that the UE is in state RRC_IDLE with generic procedure parameters connectivity = NR with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

12. Repeat step 2-11 until a test verdict has been achieved.
Each of the events "Re-select lower priority Cell 1" and "Re-select higher priority Cell 2" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Annex G clause G.2.7 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

12.1.1.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 12.1.1.1.4.3-1: Common Exception messages for E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.3-1 Table H.2.3-2 with condition lower priority Table H.2.3-3 with condition lower priority
Default RRC messages and information elements contents exceptions	Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 12.1.1.1.4.3-2: *SystemInformationBlockType3*

Derivation Path: TS 36.508 Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearch	25	Actual value = 50 dB	
threshServingLow	22	Actual value = 44 dB	
}			
}			

Table 12.1.1.1.4.3-3: SystemInformationBlockType24

Derivation Path: TS 36.508, Table 4.4.3.3-20 with Condition FR1			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
measTimingConfig-r15[1] SEQUENCE {			
periodicityAndOffset-r15 CHOICE {			
sf20-r15	0		

}			
ssb-Duration-r15	sf2	Synchronous cells	Configuration 1,2
}			
subcarrierSpacingSSB-r15[1]	kHz30		Configuration 1,2
threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
q-RxLevMin-r15[1]	-69	Actual value = -137 dBm, Round down	Configuration 1,2
}			
}			

12.1.1.1.5 Test requirement

Tables 12.1.1.1.4.1-3, 12.1.1.1.5-1 and 12.1.1.1.5-2 define the primary level settings including test tolerances for E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA.

Table 12.1.1.1.5-1: NR Cell specific test parameters for E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 2	TDDConf.1.1.CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2	0.9		
DL CCA probability for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2	0.75		
DL CCA probability for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2	0.5		
UL CCA probability P_{CCA_UL}		1, 2	1		
$M_{d,max}$		1, 2	16		
$M_{m,max}$		1, 2	4		
$M_{e,max}$		1, 2	8		
PDSCH Reference measurement channel		1, 2	SR.1.1 CCA		
RMSI CORESET Reference Channel		1, 2	CR.1.1 CCA		
RMC CORESET Reference Channel		1, 2	CCR.1.1 CCA		
OCNG Patterns		1, 2	OP.1		
SSB configuration		1, 2	SSB.1 CCA Note4 SSB.2 CCA Note5,6		
Initial DL BWP configuration		1, 2	DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1		
RLM-RS		1, 2	SSB		
Qrxlevmin	dBm/SCS	1, 2	-137		
Pcompensation	dB	1, 2	0		
$Qhyst_s$	dB	1, 2	0		
$Qoffset_{s,n}$	dB	1, 2	0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		

$\hat{E}_s/I_{ot}$	dB	1, 2	-3.65	-infinity	13.55
N_{oc} Note2	dBm/SCS	1, 2	-96.9	-95	-95
N_{oc} Note2	dBm/15 kHz	1, 2	-99.9	-98	-98
$\hat{E}_s/N_{oc}$	dB	1, 2	-3.65	-infinity	13.55
SS-RSRP Note3	dBm/SCS	1, 2	-100.54	-infinity	-81.44
Io	dBm/38.16 MHz	1, 2	-64.29	-63.94	-50.21
Treselection	s	1, 2	0	0	0
SnonintrasearchP	dB	1, 2	50		
$Thresh_{x, highP}$	dB	1, 2	48		
$Thresh_{serving, lowP}$	dB	1, 2	44		
$Thresh_{x, lowP}$	dB	1, 2	50		
Propagation Condition		1, 2	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table 12.1.1.1.5-2: E-UTRA Cell specific test parameters for E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [23] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc} Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 KHz	-84	-84	-82.45
$\hat{E}_s/I_{ot}$	dB	14	14	15.55
$\hat{E}_s/N_{oc}$	dB	14	14	15.55

$Treselection_{EUTRAN}$	s	0
SnonintrasearchP	dB	50
$Thresh_{x, highP}$	dB	48
$Thresh_{serving, lowP}$	dB	44
$Thresh_{x, lowP}$	dB	50
Propagation Condition		AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell reselection delay to a higher priority NR cell subject to CCA is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration updateon Cell 2.

The cell re-selection delay to a higher priority cell shall be less than 60 + 1.28 x (5 + M_e) + T_{SI_CCA} s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate,NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of Cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search}$ + $T_{evaluate,\ NR_\ inter_CCA}$ + $T_{SI_CCA,}$ and to a lower priority cell can be expressed as: $T_{evaluate,\ NR}$ + $T_{SI\text{-}NR,}$

Where:

$T_{higher_priority_search}$ See clause 4.2.2 in TS 36.133 [23]

$T_{evaluate,\ NR_\ inter_CCA}$ See Table 12.1.1.0.1-1 in clause 12.1.1.0.1.

T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

$T_{evaluate,\ NR}$ See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [23]

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority NR cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

12.2 RRC_CONNECTED State Mobility

12.2.1 Handover

12.2.1.0 Minimum Conformance Requirements

12.2.1.0.1 Minimum conformance requitements for E-UTRA - NR FR1 with CCA handover

The purpose of inter-RAT handover from E-UTRAN to NR in FR1 in carrier frequencies with CCA is to transfer a connection between the UE and E-UTRAN to NR in FR1 carrier frequencies with CCA. The handover procedure is initiated from E-UTRAN with an RRC message (MOBILITY FROM E-UTRA). The procedure is described in TS 36.331 [29].

In the requirements of clause 12.2.1.0.1, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due

to DL CCA failures at gNB during the corresponding detection or time tracking period; otherwise the SMTC occasion is considered as available at the UE.

In the requirements of clause 12.2.1.0.1, the term PRACH occasion unavailable for transmission refers to when the PRACH occasion is configured by gNB at the UE but not transmitted by the UE during the corresponding period due to UL CCA failures at the UE; otherwise the PRACH occasion is considered as available for transmission.

When the UE receives an RRC message implying inter-RAT handover to the UE shall be ready to start the transmission of the uplink PRACH channel in NR within $D_{handover}$ seconds from the end of the last TTI containing the RRC command. $D_{handover}$ is defined as

$$D_{handover} = T_{RRC_procedure_delay} + T_{interruption}$$

Where:

$T_{RRC_procedure_delay}$: it is the RRC procedure delay which is [50] ms.

$T_{interruption}$: it is the time between end of the last TTI containing the RRC command on the PDSCH in E-UTRAN and the time the UE starts transmission of the PRACH in NR, excluding $T_{RRC_procedure_delay}$. $T_{interrupt}$ is defined below.

When inter-RAT handover to NR is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{rs} + T_{processing} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknown cell and target cell Es/Iot $\geq$ [-2] dB, then $T_{search} = (3+L_1') * T_{rs}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

L_1' is the number of SMTC occasions not available at the UE during the inter-RAT detection period. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20 ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2 ms.

T_{IU} is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. T_{IU} can be up to: $(1+ L_3)*T_{SSB,RO}$ + 10 ms; where $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [8] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failures. L_3 = 0 for Type 2C UL channel access procedure as defined in TS 37.213 [37]. When the UE is configured with both the UL BWP with PRACH occasion on the target cell and UL LBT failure detection/recovery, the interruption can be longer.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

NOTE 2: The interruption time extended by L_1' and L_3 parameters, and by the UL LBT failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is specified in TS 38.331 [13].

T_{rs} is the SMTC period of the taget NR cell if the UE has been provided with an SMTC configuration for the target cell prior to, or in the handover command, otherwise T_{rs} is the target cell SSB transmission period, if such is provided. If the UE is not provided with an SMTC configuration or SSB transmission period, the requirement in this section is applied with Trs = 5 ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If UE is provided with both SMTC configuration and SSB transmission period the requirement shall be based on SMTC periodicity.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in TS 36.133 [23] clause 8.1.2.4.21A, and 8.1.2.4.22A.

The normative reference for this requirement is TS 36.133 [23] clause 5.3.4A.

12.2.1.1 E-UTRAN - NR with CCA handover with known target cell

12.2.1.1.1 Test purpose

The purpose of this test is to verify the E-UTRAN to NR FR1 handover requirements specified in clause 12.2.1.0.1.

12.2.1.1.2 Test applicability

This test applies to all E-UTRA UE release 16 and forward, supporting RRM measurements on a shared spectrum NR carrier, supporting standalone NR-U, RRM measurements and UL with a shared spectrum NR carrier.

12.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 12.2.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.12.2.1.1.

12.2.1.1.4 Test description

12.2.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 12.2.1.1.4.1-1.

Table 12.2.1.1.4.1-1: Supported test configurations for E-UTRAN - NR with CCA handover with known target cell

Configuration	Description
12.2.1.1-1	LTE FDD, NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
12.2.1.1-2	LTE TDD, NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 12.2.1.1.4.1-2.

Table 12.2.1.1.4.1-2: Initial conditions for E-UTRAN - NR with CCA handover with known target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.10-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 12.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 12.2.1.1.4.1-3.
2. Message contents are defined in clause 12.2.1.1.4.3.
3. There are two carriers and two cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier subject to CCA. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1 and NR Cell 2 is configured according to clauses C.1.1 and C.1.2.

Table 12.2.1.1.4.1-3: General test parameters for E-UTRAN - NR with CCA handover with known target cell

Parameter	Unit	Value	Comment

NR RF Channel Number			1	1 NR carrier frequency with CCA is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	E-UTRAN cell
	Neighbouring cell		Cell 2	NR cell with CCA
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause D.7.2.1	
UL CCA model			As specified in clause D.7.2.2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	-84	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2NR		dBm	As specified in Table 12.2.1.1.5-2	Absolute NR SS-RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in Table 8.1.2.1-1 started before T2 starts [23]
T1		s	5	
T2		s	≤5	
T3		s	1	

12.2.1.1.4.2 Test procedure

The test comprises of one E-UTRA carrier and one NR carrier. There are two cells and one cell on each carrier. Cell 1 is the E-UTRAN cell and Cell 2 is an inter-RAT NR neighbour cell under CCA. The general and cell specific test parameters for PCell and neighbour cell are given in Table 12.2.1.1.4.1-3, 12.2.1.1.5-1 and 12.2.1.1.5-2, respectively.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable, and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 8.1.2.1-1 of TS 36.133 [23] is configured before T2 begins to enable inter-RAT frequency monitoring. A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters of Cell 1 and Cell 2 according to T1 in Table 12.2.1.1.5-1 and Table 12.2.1.1.5-2 respectively, T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the parameters setting from T1 to T2 as specified in Table 12.2.1.1.5-1 and Table 12.2.1.1.5-2 respectively. The SS shall enable DL and UL CCA model according to Table 12.1.1.1.5-2. T2 Starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event B2.
7. SS shall transmit a *MobilityFromEUTRACommand* message implying handover to Cell 2.
8. The start of T3 is the instant when the last TTI containing the *MobilityFromEUTRACommand* message implying handover is sent to the UE, at that instant the SS shall switch the power setting from T2 to T3 as specified in Table 12.2.1.1.5-1 and Table 12.2.1.1.5-2.

9. If the UE transmits the uplink PRACH channel to Cell 2 less than 312 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

10. The UE shall transmit an *RRCReconfigurationComplete* message on Cell 2.

11. After T3 expires, the SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1) and,

    - could switch the parameters setting from T3 to T1 as specified in Table 12.2.1.1.5-1 and Table 12.2.1.1.5-2 respectively.

    - If the UE handover back to E-UTRA Cell 1, then T1 starts, skip to step 3. Otherwise, switch off and on the UE. Then ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3. E-UTRA Cell 1 is the active cell.

    - Or, switch off and on the UE. Then ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3. E-UTRA Cell 1 is the active cell.

12. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

13. Repeat step 2-12 until the confidence level according to Annex G clause G.2.7 is achieved.

12.2.1.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 12.2.1.1.4.3-1: Common Exception messages for E-UTRAN - NR with CCA handover with known target cell

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.3-2 Table H.3.4-1a Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 and gapUE Table H.3.4-5 with Condition Pattern #0 Table H.3.4-6 with Condition Asynchronous cells Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

12.2.1.1.5 Test requirement

Table 12.2.1.1.4.1-3, 12.2.1.1.5-1 and 12.2.1.1.5-2 define the primary level settings including test tolerances for E-UTRAN - NR with CCA handover with known target cell.

Table 12.2.1.1.5-1: E-UTRAN PCell specific test parameters for E-UTRAN - NR with CCA handover with known target cell

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2	2		
Duplex mode		1	FDD		
		2	TDD		
TDD special subframe configuration[Note1]		1, 2	6		
TDD uplink-downlink configuration[Note1]		1, 2	1		
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		

PRACH Configuration[Note2]		1	4		
		2	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA PBCH_RB PSS_RA SSS_RA PCFICH_RB PHICH_RA PHICH_RB PDCCH_RA PDCCH_RB PDSCH_RA PDSCH_RB OCNG_RA[Note4] OCNG_RB[Note4]	dB	1, 2	0		
N_{oc}[Note5]	dBm/15kHz	1, 2	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2	7	4.45	4.45
$\hat{E}_s/I_{ot}$[Note6]	dB	1, 2	7	4.45	4.45
RSRP[Note6]	dBm/15kHz	1, 2	-91	-93.55	-93.55
SCH_RP[Note6]	dBm/15kHz	1, 2	-91	-93.55	-93.55
Io[Note6]	dBm/9MHz	1, 2	-59.42	-61.43	-61.43
Propagation Condition		1, 2	AWGN		
Antenna Configuration and Correlation Matrix [Note7]		1, 2	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [24].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 12.2.1.1.5-2: NR neighbor cell specific test parameters for E-UTRAN - NR with CCA handover with known target cell

Parameter		Unit	Configuration	Cell 2		
				T1	T2	T3
RF channel number			1, 2	1		
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 4, 6		1, 2	P_{CCA_DL}=0.9375		
	Dynamic channel access Note 5, 6		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		

UL CCA probability P_{CCA_UL}	Semi-static channel access Note 4, 6		1, 2	P_{CCA_UL}=0.87		
	Dynamic channel access Note 5, 6		1, 2	P_{CCA_UL}=0.75		
L_{CCA_DL}		-	1, 2	5		
W_{CCA_DL}		ms	1, 2	T304		
L_{CCA_UL}		-	1, 2	5		
W_{CCA_UL}		ms	1, 2	T304		
T304		ms	1, 2	500		
Duplex mode			1, 2	TDD		
TDD Configuration			1, 2	TDDConf.1.1 CCA		
$BW_{channel}$		MHz	1, 2	40: $N_{RB,c}$ = 106 (TDD)		
PDSCH reference measurement channel			1, 2	SR.1.1 CCA		
CORESET reference channel			1, 2	CR.1.1 CCA		
PRACH configuration			1, 2	FR1 PRACH configuration 1 under CCA		
OCNG pattern Note1			1, 2	OP.1		
BWP	Initial DL BWP		1, 2	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2	SMTC.1		
SSB configuration	Semi-static channel access Note 4, 6		1, 2	SSB.1 CCA		
	Dynamic channel access Note 5, 6		1, 2	SSB.2 CCA		
DBT window configuration				DBT.1		
b2-Threshold2NR		dBm	1	-105		
			2	-103		
EPRE ratio of PSS to SSS		dB	1, 2	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc} Note2		dBm/15 KHz	1, 2	-98		
N_{oc} Note2		dBm/SCS	1, 2	-95		
$\hat{E}_s/N_{oc}$		dB	1, 2	-inifinity	0.55	0.55
$\hat{E}_s/I_{ot}$ Note3		dB	1, 2	-inifinity	0.55	0.55
SS-RSRP Note3		dBm/SCS	1, 2	-inifinity	-94.44	-94.44
Io Note3		dBm/38.16 MHz	1, 2	-63.94	-60.65	-60.65
Propagation condition			1, 2	AWGN		
Antenna Configuration and Correlation Matrix			1, 2	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted						

	only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	$\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

The UE shall start to transmit the PRACH to Cell 2 less than 112 + (L_1´ + L_3)*20 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in TS 36.331 [29].

$T_{interrupt}$ = 62 + (L_1´ + L_3) * T_{SMTC}; $T_{interrupt}$ is defined in clause 12.2.1.0.1 where

- L_1´ is the number of SMTC occasions not available at the UE during the inter-RAT detection period.
- L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. L_3 = 0 for Type 2C UL channel access procedure as defined in TS 37.213 [33].

  T_{SMTC} = 20 ms is the SMTC periodicity ms in the test.

This gives a total of 112 +(L_1´ + L_3)*20 ms.

12.3 Void

12.4 Measurement Procedure

12.4.1 E-UTRAN-NR inter-RAT SFTD measurements

12.4.1.0 Minimum Conformance Requirements

12.4.1.0.1 Minimum conformance requitements for E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA

Same Minimum Conformance Requirements as in clause 8.4.1.0.1 apply with addition below.

12.4.1.0.1.1 SFTD Measurement delay with CCA on target frequency

The requirements on SFTD measurement delay defined in this section are applicable to a UE configured with a target NR carrier for which CCA is used and under the side condition SCH $\hat{E}s/Iot \geq$ -3 dB for the NR cell. Depending on configuration, the SFTD measurement may be carried out with or without the support of configured measurement gaps. In the current release, indication on whether to carry out the SFTD measurement with or without measurement gaps is implicit and depending on whether measurement gaps are configured.

The UE shall be able to detect, identify and measure SFTD of up to 3 of the strongest NR cells on the carrier frequency provided in the SFTD measurement configuration. Further depending on the SFTD measurement configuration, the UE shall additionally report SS-RSRP for the one or more NR cells. The UE may be configured with *cellsForWhichToReportSFTD*. The UE does not expect *cellsForWhichToReportSFTD* to change during an ongoing SFTD measurement.

When no measurement gaps are provided, the UE shall be capable of finding the NR cell regardless of its SSB position in the SMTC period. The SFTD measurement shall be conducted with sustained connection to the E-UTRA PCell and activated SCell(s), however, the UE may be allowed to cause a certain amount of interruptions for reconfiguration of the radio receiver, as specified in TS 36.133 [23] clause 7.35.

When measurement gaps are provided, the UE shall be capable of finding the NR cell under the additional condition that the SSB at least occasionally falls within the measurement gap.

When no MCG DRX is used, the UE shall be capable of determining SFTD within a physical layer measurement period of $T_{measure_SFTD_LBT_max} = 4 \times T_{measure_SFTD1}$, where $T_{measure_SFTD1}$ is defined in clause 8.4.1.0.1. If the UE is unable to meet the requirement, it shall terminate the inter-RAT SFTD measurement.

When MCG DRX is used, the same $T_{measure_SFTD_LBT_max}$ as for non-DRX applies, but the reporting delay depends on the DRX cycle length in use.

In case an NR PSCell is added, the UE shall terminate the inter-RAT SFTD measurement.

In case PCell is changed due to handover, the UE shall terminate the inter-RAT SFTD measurement.

12.4.1.0.1.2 SFTD Measurement reporting delay

The SFTD measurement reporting delay is defined as the time between a command that will trigger an SFTD measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report and all delays due to UL CCA failures until the successful transmission of the report. When the UE is configured to perform SRS carrier-based switching, an additional delay can be expected.

The SFTD measurement reporting delay shall be less than $T_{measure_SFTD1}$ defined in clause 8.4.1.0.1 and $T_{measure_SFTD_LBT_max}$ defined in clause 12.4.1.0.1.1 for target carrier without and with CCA, respectively.

12.4.1.0.1.3 E-UTRAN TDD – NR SFTD Measurements

This clause contains requirements for a UE supporting E-UTRAN TDD – NR dual connectivity and is applicable in RRC_CONNECTED state and conditioned on that no NR PSCell is configured.

When no measurement gap is provided, the UE is not required to perform SFTD measurement during the UL subframes of an E-UTRAN serving cell which is on the same TDD band with the NR target cell.

When no measurement gap is provided, the UE is not required to perform SFTD measurement during the UL subframes of a TDD E-UTRAN serving cell which is on the different band with the NR target cell when UE doesn't support *simultaneousRxTxInterBandENDC* in this band combination.

The requirements in clauses 12.4.1.0.1.1 and 12.4.1.0.1.2 also apply for this section.

The normative reference for this requirement is TS 36.133 [23] clauses 8.1.2.4.25 and 8.1.2.4.26.

12.4.1.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX

Editor's Note:

- MU and TT analysis is incomplete

12.4.1.1.1 Test purpose

The purpose of this test is to partly verify that measurement reporting delay for SFTD between E-UTRA PCell and inter-RAT NR neighbour cell under CCA is within the requirements stated in clause 12.4.1.0.1 for E-UTRA FDD and TDD, when no measurement gaps are provided and no DRX is configured.

12.4.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting FR1 with a shared spectrum NR carrier and supporting inter-RAT SFTD measurements on a TDD NR cell.

12.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 12.4.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.12.4.1.1.

12.4.1.1.4 Test description

Two carriers are used in the tests: one E-UTRA carrier with the PCell (Cell 1), and one NR carrier under CCA with the NR neighbour cell (Cell 2).

This test consists of a single time period of duration T1. Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The point in time at which the UE receives, at the UE antenna connector(s), a RRC message containing a measurement configuration for SFTD measurements on RF channel 2 defines the start of time duration T1. Following the start of T1 the UE shall detect Cell 2, determine the SFN and frame time difference of Cell 2 relative to Cell 1, and send a measurement report. No measurement gaps are provided and no DRX is configured in this test.

12.4.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 12.4.1.1.4.1-1.

Table 12.4.1.1.4.1-1: Supported test configurations for E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX

Config	Description
12.4.1.1-1	LTE FDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
12.4.1.1-2	LTE TDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test requirement and the DUT according to the parameters in Table 12.4.1.1.4.1-2.

Table 12.4.1.1.4.1-2: Initial conditions for E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.10-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 12.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 12.4.1.1.4.1-3.
2. Message contents are defined in clause 12.4.1.1.4.3.
3. There are two carriers and two cells specified in the test, where Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier under CCA. Cell 1 is the cell used for connection setup for this test. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clauses C.1.0 and C.1.1.

Table 12.4.1.1.4.1-3: General test parameters for E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2	1		One NR carrier frequencies is used.
Active cell		Config 1,2	Cell 1		Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Config 1,2	Cell 2		Cell 2 is on NR RF channel number 1.
CP length		Config 1,2	Normal		Applicable to both cells.
DRX		Config 1,2	OFF		DRX is not used
Frame time offset between serving and neighbour cells	ms	Config 1	3	7	Asynchronous cells. The timing of Cell 2 relative to the timing of Cell 1.
	µs	Config 2	3		Synchronous cells.
SFN offset between serving and neighbour cells		Config 1,2	0	1	SFN of Cell 2 relative to SFN of Cell 1.
SS-RSRP reporting		Config 1,2	No		Only SFTD is reported.
T1	s	Config 1,2	2		T1 shall exceed $T_{measure_SFTD_LBT_max}$ = 56 × SMTC

12.4.1.1.4.2 Test procedure

The test has two subtests with different frame time offset and SFN offset. Cell specific test parameters for the E-UTRA PCell and neighbour cell are given in Table 12.4.1.1.5-1 and 12.4.1.1.5-2, respectively.

In the measurement control information, it is indicated to the UE that inter-RAT SFTD measurement on Cell 2 is used. This test consists of single time period with time duration of T1. Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The DL CCA model is disabled (i.e. $P_{CCA_DL_i}$= 1) at the start of the test.

Configure the frame time offset and SFN offset according to Test 1 in Table 12.4.1.1.4.1-3.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. The SS shall set the parameters of Cell 2 according to T1 in Table 12.4.1.1.5-2 and enable DL CCA model according to Table 12.4.1.1.5-2. T1 starts.
3. The SS shall transmit an *RRCConnectionReconfiguration* message.
4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.
5. UE shall transmit a *MeasurementReport* message triggered by SFTD measurement reporting. If the overall delays measured from the beginning of time period T1 is less than [1130 ms] then the number of successful tests is increased by one. If the UE fails to report within the overall delays measured requirement then the number of failure tests is increased by one.
6. After the SS receive the *MeasurementReport* message in step 6) or when T1 expires, the SS shall transmit an *RRCConnectionRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources. The SS shall disable the DL CCA model (i.e. PCCA_DL_i= 1).
7. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
8. After the RRC connection release, the SS:
   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or

- switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

9. Repeat step 2-8 until the confidence level according to Annex G clause G.2.7 is achieved.
10. Set the frame time offset and SFN offset for Test 2 according to Table 12.4.1.1.4.1-3 and repeat steps 1 to 9.

12.4.1.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 12.4.1.1.4.3-1: Common Exception messages for E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and SFTD; Table H.3.4-4 with Condition INTER-RAT NR, SFTD and GAPLESS Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.2

12.4.1.1.5 Test requirement

Table 12.4.1.1.4.1-3, 12.4.1.1.5-1 and 12.4.1.1.5-2 define the primary level settings including test tolerances E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX.

Table 12.4.1.1.5-1: E-UTRA Cell specific test parameters for E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX

Parameter	Unit	E-UTRAN Cell1
E-UTRA RF Channel Number		1
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	

PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA Note3	dB	
OCNG_RB Note3	dB	
N_{oc} Note4	dBm/15 kHz	-104+TT
$\hat{E}_s/N_{oc}$	dB	17+TT
$\hat{E}_s/I_{ot}$	dB	17+TT
RSRP Note5	dBm/15 kHz	-87+TT
SCH_RP Note5	dBm/15 kHz	-87+TT
Io Note5	dBm/Ch BW	-59.13+10log($N_{RB,c}$ /50)+TT
Propagation Condition		AWGN
Antenna Configuration		1x2

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
NOTE 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 5: E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 12.4.1.1.5-2: NR Cell specific test parameters for E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX

Parameter		Unit	Cell 2
NR RF Channel Number			1
Duplex mode			TDD
$BW_{channel}$		MHz	40: $N_{RB,c}$ = 106
TDD configuration			TDDConf.1.1 CCA
DL CCA model			As specified in clause D.7.2.1
DL CCA probability for semi-static channel access Note5,7	P_{CCA_DL}		0.9375
DL CCA probability for dynamic channel access Note6,7	$P_{CCA_DL_1}$		0.75
	$P_{CCA_DL_2}$		0.75
OCNG Pattern defined in A.2.1 Note 1			OP.1
SMTC configuration defined in A.4			SMTC.2
SSB configuration for semi-static channel access Note5,7			SSB.1 CCA
SSB configuration for dynamic channel access Note6,7			SSB.2 CCA
DBT window configuration			DBT.1
PDSCH/PDCCH subcarrier spacing		kHz	30
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS		dB	
EPRE ratio of PBCH to PBCH DMRS		dB	
EPRE ratio of OCNG DMRS to SSS Note 1		dB	
EPRE ratio of OCNG to OCNG DMRS Note 1		dB	
N_{oc} Note2		dBm/15 kHz	-98+TT
N_{oc} Note2		dBm/SCS	-95+TT

SS-RSRP Note 3, 4	dBm/SCS	-91+TT
$\hat{E}_s/I_{ot}$	dB	4+TT
$\hat{E}_s/N_{oc}$	dB	4+TT
Io Note 3	dBm/38.16 MHz	-58.50+TT
Propagation Condition		AWGN

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic cannel access, the UE can be tested under dynamic channel access only..

Following the start of T1, the UE shall detect Cell 2 and determine the relative time difference between Cell 1 and Cell 2. At latest at $T_{RRC_procedure_delay} + T_{measure_SFTD_LBT_max}$ after the beginning of time duration T1, the UE shall send a measurement report on SFTD between Cell 1 and Cell 2.

The observed rate of successful SFTD reports in repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2\times TTI_{DCCH}$ longer than the measurement reporting delays above due to TTI insertion uncertainty of the measurement report in DCCH.

12.4.2 E-UTRAN-NR inter-RAT measurements on NR carrier frequency under CCA

12.4.2.0 Minimum Conformance Requirements

Requirements in this clause shall apply for NR capable UE, when NR is in carrier frequencies with CCA and not configured with EN-DC.

The UE shall be able to identify new NR cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-RAT cells if carrier frequency information is provided by the PCell, even if no explicit neighbour list with physical layer cell identities is provided.

In the requirements on this clause, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the *N* candidate SSB positions for the same SS/PBCH block index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding period, where:

- For the cell detection procedure: *N* is at least one candidate SSB position (NOTE: the one candidate SSB position for the cell detection shall not be impacted by the set of candidate SSB positions which are already being measured by the UE within the current measurement period of the on-going measurements), and

- For other procedures in this clause: *N* are the first two successive candidate SSB positions when two or more candidate SSB positions are configured for this SSB index in one discovery burst transmission window, otherwise N is one candidate SSB position;

otherwise the SMTC occasion is considered as available at the UE.

The normative reference for this requirement is TS 36.133 [23] clauses 8.1.2.4.21A and 8.1.2.4.22A.

12.4.2.0.1 E-UTRAN – NR measurements

12.4.2.0.1.1 Identification of a new NR cell

When measurement gaps are scheduled, the UE shall be able to identify a new detectable cell within $T_{identify_irat_cca_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise, UE shall be able to identify a new detectable inter-RAT frequency cell within $T_{identify_irat_cca_with_index}$. The UE shall be able to identify a new detectable inter-RAT frequency SSB of an already detected cell within $T_{identify_irat_cca_without_index}$.

$$T_{identify_irat_cca_without_index} = (T_{PSS/SSS_sync_irat_cca} + T_{SSB_measurement_period_irat_cca}) \text{ ms}$$

$$T_{identify_irat_cca_with_index} = (T_{PSS/SSS_sync_irat_cca} + T_{SSB_measurement_period_irat_cca} + T_{SSB_time_index_irat_cca}) \text{ ms}$$

Where:

$T_{PSS/SSS_sync_irat_cca}$: it is the time period used in PSS/SSS detection given in table 12.4.2.0.1.1-1.

$T_{SSB_time_index_irat_cca}$: it is the time period used to acquire the index of the SSB being measured given in table 12.4.2.0.1.1-2.

$T_{SSB_measurement_period_irat_cca}$: equal to a measurement period of SSB based measurement given in table 12.4.2.0.1.1-3.

N_{freq} is defined in 36.133 [23] clause 8.1.2.1.1.

Table 12.4.2.0.1.1-1: Time period for PSS/SSS detection, in NR carrier frequencies with CCA

Condition NOTE1,2,3,4	$T_{PSS/SSS_sync_irat_cca}$
No DRX	Max(600ms, (8 +$L_{PSS/SSS,gaps}$) × Max(MGRP, SMTC period)) × N_{freq}
DRX cycle ≤ 320ms	Max(600ms, Ceil((8+$L_{PSS/SSS,gaps}$) ×1.5) × Max(MGRP, SMTC period, DRX cycle)) × N_{freq}
DRX cycle > 320ms	(8+$L_{PSS/SSS,gaps}$) × DRX cycle × N_{freq}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 5.	
NOTE 3: $L_{PSS/SSS,gaps}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_irat_cca}$, where $L_{PSS/SSS,gaps} \leq L_{PSS/SSS,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP.	
NOTE 4: $L_{PSS/SSS,gaps}$ = 12 for max(DRX cycle, SMTC period, MGRP) ≤ 40 ms $L_{PSS/SSS,gaps}$ = 8 for 40 ms < max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{PSS/SSS,gaps}$ = 5 for DRX cycle > 320 ms.	

Upon exceeding $L_{PSS/SSS,gaps,max}$, the UE is not required to meet the corresponding PSS/SSS detection requirement. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

Table 12.4.2.0.1.1-2: Time period for time index detection, in NR carrier frequencies with CCA

Condition NOTE1,2,3,4	$T_{SSB_time_index_irat_cca}$
No DRX	Max(120ms, (3 + $L_{ind,gaps}$) × Max(MGRP, SMTC period)) × N_{freq}
DRX cycle ≤ 320ms	Max(120ms, ceil((3+ $L_{ind,gaps}$) x 1.5) × Max(MGRP, SMTC period, DRX cycle)) × N_{freq}
DRX cycle > 320ms	(3+ $L_{ind,gaps}$) × DRX cycle × N_{freq}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 5	
NOTE 3: $L_{ind,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_irat_cca}$, where $L_{ind,gaps} \leq L_{ind,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP.	
NOTE 4: $L_{ind,gaps,max}$ = 5 for Max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{ind,gaps,max}$ = 3 for Max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{ind,gaps,max}$ = 2 for DRX cycle > 320 ms.	

The UE shall restart the time index detection upon exceeding $L_{ind,gaps,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

In the requirements, an NR cell is considered to be detectable when:

- NR SS-RSRP related conditions in the accuracy requirements in 36.133 [23] Section 9.11.4 are fulfilled for a corresponding Band, together with the corresponding side conditions in subclause 10.1.37.1 of TS 38.133 [6],
- NR SS-RSRQ related conditions in the accuracy requirements in 36.133 [23] Section 9.11.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in subclause 10.1.30.1 of TS 38.133 [6],
- NR SS-SINR related conditions in the accuracy requirements in 36.133 [23] Section 9.11.6 are fulfilled for a corresponding Band, together with the corresponding side conditions in subclause 10.1.32.1 of TS 38.133 [6].

When measurement gaps are scheduled for NR measurements the UE physical layer shall be capable of reporting NR SS-RSRP, SS-RSRQ, and SS-SINR measurements to higher layers with measurement accuracy, with measurement period as shown in table 12.4.2.0.1.1-3:

Table 12.4.2.0.1.1-3: Measurement period for inter-RAT measurements

Condition NOTE1,2,3,4	$T_{SSB_measurement_period_irat_cca}$
No DRX	$Max(200ms, (8+ L_{meas}) \times Max(MGRP, SMTC\ period)) \times N_{freq}$
DRX cycle ≤ 320ms	$Max(200ms, ceil((8+ L_{meas}) \times 1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times N_{freq}$
DRX cycle > 320ms	$(8+ L_{meas}) \times DRX\ cycle \times N_{freq}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 5 NOTE 3: L_{meas} is the number of SMTC occasions not available at the UE during $T_{SSB_measurement_period_irat_cca}$, where $L_{meas} \le L_{meas,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. NOTE 4: $L_{meas,max}$ = 12 for Max(DRX cycle, SMTC period, MGRP) ≤ 40 ms, $L_{meas,max}$ = 8 for Max(DRX cycle, SMTC period, MGRP) ≤ 320 ms, and $L_{meas,max}$ = 5 for DRX cycle > 320 ms.	

The UE shall restart the measurement upon exceeding $L_{meas,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

When the time period of unsuccessful measurement attemps due to exceeding the maximum number of unavailable at the UE SMTC occasions of an already identified cell exceeds the maximum time requirement for the cell to remain known defined in 36.133 [23] clause 9.3A.6.3, the UE shall stop the measurement attempts on this SSB and perform the detection procedure again, like for any other SSB.

The UE shall be capable of performing SSB based SS-RSRP, SS-RSRQ, and SS-SINR for up to [7] NR carrier frequencies.

For each RAT E-UTRAN-NR layer on, in carrier frequencies with CCA, the UE shall be capable of monitoring at least 4 cells.

For each RAT E-UTRAN-NR layer in carrier frequencies with CCA, during each layer 1 measurement period, the UE shall be capable of monitoring at least 7 SSBs with different SSB indexes and/or PCI on the RAT E-UTRAN-NR layer.

The normative reference for this requirement is TS 36.133 [23] clause 8.1.2.4.21A.1.1.

12.4.2.0.1.2 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in 36.133 [23] clause 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement

report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report and all delays due to UL CCA failures until the successful transmission of the report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify_irat_cca_without_index}$ or $T_{identify_irat_cca_with_index}$ defined in clause 12.4.2.0.1.1 for the minimum requirements. When L3 filtering is used or IDC autonomous denial or the UE is performing reception and/or transmission for ProSe Direct Discovery and/or ProSe Direct Communication, or the UE is configured to perform SRS carrier based switching, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{identify_irat_cca_without_index}$ or $T_{identify_irat_cca_with_index}$ defined in clause 12.4.2.0.1.1 for the minimum requirements and then triggers the measurement report as per TS 36.331 [29], the event triggered measurement reporting delay shall be less than $T_{measurement_NR_cca}$ defined in clause 12.4.2.0.1.1 provided the timing to that cell has not changed more than ±3200 Tc while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used or IDC autonomous denial is configured or the UE is performing reception and/or transmission for ProSe Direct Discovery and/or ProSe Direct Communication, or the UE is configured to perform SRS carrier based switching, an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clause 8.1.2.4.21A.1.3.

12.4.2.0.1.3 NR inter-RAT RSSI measurements

The UE physical layer shall be capable of performing the RSSI measurements, defined in TS 38.215 [10], on one or more inter-RAT carriers operating with CCA, TS 37.213 [37], if the carrier(s) are indicated by higher layers, and reporting the RSSI measurements to higher layers. The UE physical layer shall provide to higher layers a single RSSI sample for each OFDM symbol within each configured RSSI measurement duration occurring with a configured RSSI measurement timing configuration periodicity, *rmtc-Periodicity*.

Table 12.4.2.0.1.3-1: Measurement period for inter-RAT RSSI measurements with gaps

Condition NOTE1,2,3,4	$T_{RSSI_measurement_period_NR_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{NR,EN-DC}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle) x $CSSF_{NR,EN-DC}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 of TS 38.133 [6].	

If the UE requires measurement gaps to perform inter-frequency measurements, a single measurement gap pattern is used for all concurrent inter-frequency measurements, including inter-frequency RSSI measurements. The RSSI measurement duration and the measurement gap shall be aligned, and the following additional condition shall be fulfilled:

- Entire RSSI measurement duration shall be contained in the measurement gap.

The normative reference for this requirement is TS 36.133 [23] clause 8.1.2.4.21A.1.5.

12.4.2.0.1.4 NR inter-RAT channel occupancy measurements

The UE shall be capable of estimating the channel occupancy on one or more carrier frequencies indicated by higher layers, based on RSSI samples provided by the physical layer.

Table 12.4.2.0.1.4-1: Measurement period for inter-RAT Channel Occupancy measurements with gaps

Condition NOTE1,2,3,4	$T_{CO_measurement_period_NR_cca}$
No DRX	max(*reportInterval*, max(*rmtc-Periodicity, MGRP*) x $CSSF_{NR,EN-DC}$)
DRX	max(*reportInterval*, max(*rmtc-Periodicity*, MGRP,DRX cycle) x $CSSF_{NR,EN-DC}$)
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 of TS 38.133 [6].	

If the UE requires measurement gaps to perform inter-frequency measurements, a single measurement gap pattern is used for all concurrent inter-frequency measurements, including inter-frequency channel occupancy measurements.

The normative reference for this requirement is TS 36.133 [23] clause 8.1.2.4.21A.1.6.

12.4.2.1 E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA

12.4.2.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 12.4.2.0 for E-UTRAN-NR measurements under CCA.

12.4.2.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting RRM measurements on a shared spectrum NR carrier.

12.4.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 12.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.12.4.2.1.

12.4.2.1.4 Test description

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables 12.4.2.1.4.1-3, 12.4.2.1.5-1 and 12.4.2.1.5-2. Cell transmits SSBs in DBT windows according to DL CCA model.

In this test measurement gap pattern configuration # 0 as defined in Table 12.4.2.1.4.1-3 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

12.4.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 12.4.2.1.4.1-1.

Table 12.4.2.1.4.1-1: Supported test configurations for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA

Configuration	Description
12.4.2.1-1	LTE FDD; NR with CCA: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
12.4.2.1-2	LTE TDD; NR with CCA: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note1: The UE is only required to pass in one of the supported test configurations above.	

Configure the test equipment and the DUT according to the parameters in Table 12.4.2.1.4.1-2.

Table 12.4.2.1.4.1-2: Initial conditions for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.10-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 12.4.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part	

1. The test parameter settings are set up according to Tables 12.4.2.1.5-1 and 12.4.2.1.5-2.
2. Message contents are defined in clause 12.4.2.1.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is an NR cell (neighbor cell) in an unlicensed carrier subject to CCA and its power level is set according to clauses C.1.2 and C.1.3 for this test.

Table 12.4.2.1.4.1-3: General test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Chanel Number		1, 2	1	One FR1 NR carrier frequency under CCA is used.
DL CCA model			As specified in clause D.7.2.1	
UL CCA model			As specified in clause D.7.2.2	
L_{CCA_DL}		1, 2	12	
W_{CCA_DL}	ms	1, 2	$T_{PSS/SSS_sync_irat_cca}$	
Active cell		1, 2	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset		1, 2	39	As specified in TS 36.331 [29].
b2-Threshold1	dBm	1, 2	Note 1	E-UTRA RSRP threshold for measurement on cell 1 for event B2
b2-Threshold2NR	dBm	1, 2	Note 2	SS-RSRP threshold for measurement on cell 2 for event B2
Hysteresis	dB	1, 2	0	
CP length		1, 2	Normal	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 2	3µs	Synchronous cells.
T1	s	1, 2	5	
T2	s	1, 2	$\geq T_{identify_irat_cca_without_index}$	$T_{identify_irat_cca_without_index}$ is defined in clause 12.4.2.0
Note 1: The value of b2-Threshold1 is defined in Table 12.4.2.1.5-1 Note 2: The value of b2-Threshold2NR is defined in Table 12.4.2.1.5-2				

12.4.2.1.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}= P_{CCA_UL}=1$) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to T1 in Tables 12.4.2.1.5-1 and 12.4.2.1.5-2.

3. The SS shall transmit an *RRCConnectionReconfiguration* message configuring inter-RAT RSRP measurements on a target NR unlicensed carrier according to section 12.4.2.1.4.3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 12.4.2.1.5-1. T1 starts.

5. UE shall transmit a *MeasurementReport* message containing Cell 2 RSRP measurements obtained in the target unlicensed NR carrier. If the overall measurement reporting delay measured from the beginning of time period T1 is less than 1602 ms, then the number of successful tests is increased by one. If the UE fails to report the measurements within the overall delays measured requirement, then the number of failure tests is increased by one.

6. After the SS receives the *MeasurementReport* message in step 5, the SS shall transmit *RRCConnectionRelease* according to TS 36.508 [25] to release the LTE cell. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

7. Set Cell 2 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

8. Repeat step 1-7 until the confidence level according to Annex G clause G.2.7 is achieved.

12.4.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 12.4.2.1.4.3-1: Common Exception messages for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and EVENT B2; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 Table H.3.4-5 with Condition Pattern #0 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

12.4.2.1.5 Test requirements

Tables 12.4.2.1.5-1 and 12.4.2.1.5-2 define the primary level settings including test tolerances for all tests for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA.

Table 12.4.2.1.5-1: E-UTRAN cell specific test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD	

			10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2	17	17
RSRP[Note5]	dBm/15kHz	1, 2	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2	-87	-87
Io[Note5]	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2	AWGN	
Antenna Configuration and Correlation Matrix [Note6]		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 12.4.2.1.5-2: NR neighbor cell specific test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	2	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access [Note 6,8]		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access [Note 7,8]		1, 2	P_{CCA_DL}=0.9375	
OCNG Pattern		1, 2	OP.1	
SMTC configuration		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	

SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold2NR	dBm	1, 2	-98	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-98	
N_{oc} Note2	dBm/SCS	1, 2	-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-63.95	-56.16
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2	1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index. $T_{identify_irat_cca_without_index}$ is defined in defined in clause 12.4.2.0.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

12.4.2.2 E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA

12.4.2.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 12.4.2.0 for E-UTRAN-NR measurements under CCA.

12.4.2.2.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting RRM measurements on a shared spectrum NR carrier and long DRX cycle.

12.4.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 12.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.12.4.2.2.

12.4.2.2.4 Test description

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables 12.4.2.2.4.1-3, 12.4.2.2.5-1 and 12.4.2.2.5-2. Cell transmits SSBs in DBT windows according to DL CCA model.

In this test measurement gap pattern configuration # 0 as defined in Table 12.4.2.2.4.1-3 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

12.4.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 12.4.2.2.4.1-1.

Table 12.4.2.2.4.1-1: Supported test configurations for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA

Configuration	Description
12.4.2.2-1	LTE FDD; NR with CCA: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
12.4.2.2-2	LTE TDD; NR with CCA: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note1: The UE is only required to pass in one of the supported test configurations above.	

Configure the test equipment and the DUT according to the parameters in Table 12.4.2.2.4.1-2.

Table 12.4.2.2.4.1-2: Initial conditions for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.10-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 12.4.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The test parameter settings are set up according to Tables 12.4.2.2.5-1 and 12.4.2.2.5-2.
2. Message contents are defined in clause 12.4.2.2.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is an NR cell (neighbor cell) in an unlicensed carrier subject to CCA and its power level is set according to clauses C.1.2 and C.1.3 for this test.

Table 12.4.2.2.4.1-3: General test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRAcarrier frequency is used.
NR RF Chanel Number		1, 2	1		One FR1 NR carrier frequency under CCA is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
DL CCA model			As specified in clause D.7.2.1		
UL CCA model			As specified in clause D.7.2.2		
L_{CCA_DL}		1, 2	12	5	
W_{CCA_DL}	ms	1, 2	$T_{PSS/SSS_sync_irat_cca}$		
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset		1, 2	39		As specified in TS 36.331 [29].
b2-Threshold1	dBm	1, 2	Note 1		E-UTRA RSRP threshold for measurement on cell 1 for event B2
b2-Threshold2NR	dBm	1, 2	Note 2		SS-RSRP threshold for measurement on cell 2 for event B2
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.9	DRX.12	As specified in clause A.5
Time offset between serving and neighbour cells		1, 2	3µs		Synchronous cells.
T1	s	1, 2	5		
T2	s	1, 2	$\geq T_{identify_irat_cca_without_index}$		$T_{identify_irat_cca_without_index}$ is defined in clause 12.4.2.0
Note 1: The value of b2-Threshold1 is defined in Table 12.4.2.2.5-1 Note 2: The value of b2-Threshold2NR is defined in Table 12.4.2.2.5-2					

12.4.2.2.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to T1 in Tables 12.4.2.2.5-1 and 12.4.2.2.5-2.
3. The SS shall transmit an *RRCConnectionReconfiguration* message configuring inter-RAT RSRP measurements on a target NR unlicensed carrier according to section 12.4.2.2.4.3.
4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 12.4.2.2.5-1. T1 starts.
5. UE shall transmit a *MeasurementReport* message containing Cell 2 RSRP measurements obtained in the target unlicensed NR carrier. If the overall measurement reporting delay measured from the beginning of time period T1 is less than 2402 ms for Test 1 and 16642 ms for Test 2, then the number of successful tests is increased by

one. If the UE fails to report the measurements within the overall delays measured requirement, then the number of failure tests is increased by one.

6. After the SS receives the *MeasurementReport* message in step 5, the SS shall transmit *RRCConnectionRelease* according to TS 36.508 [25] to release the LTE cell. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

7. Set Cell 2 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

8. Repeat step 1-7 until the confidence level according to Annex G clause G.2.7 is achieved.

9. Repeat step 1-8 for each subtest in Table 12.4.2.2.4.3-1.

12.4.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 12.4.2.2.4.3-1: Common Exception messages for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and EVENT B2; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 Table H.3.4-5 with Condition Pattern #0 Table H.3.7-2 with Condition DRX.9 for Test 1, or Condition DRX.12 for Test 2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

12.4.2.2.5 Test requirements

Tables 12.4.2.2.5-1 and 12.4.2.2.5-2 define the primary level settings including test tolerances for all tests for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA.

Table 12.4.2.2.5-1: E-UTRAN cell specific test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters:		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	

DL Reference Measurement Channel[Note2]				
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2	17	17
RSRP[Note5]	dBm/15kHz	1, 2	-87	-87
SCH_RP[Note5]	dBm/15kHz	1, 2	-87	-87
Io[Note5]	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition [Note6]		1, 2	AWGN	
Antenna Configuration and Correlation Matrix [Note6]		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 12.4.2.2.5-2: NR neighbor cell specific test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access [Note 6,8]		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access [Note 7,8]		1, 2	P_{CCA_DL}=0.9375	
OCNG Pattern		1, 2	OP.1	
SMTC configuration		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	

SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold2NR	dBm	1, 2	-98	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-98	
N_{oc} Note2	dBm/SCS	1, 2	-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-63.95	-56.16
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

In test 1, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

12.4.2.3 E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA

12.4.2.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 12.4.2.0 for E-UTRAN-NR measurements under CCA.

12.4.2.3.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting RRM measurements on a shared spectrum NR carrier.

12.4.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 12.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.12.4.2.3.

12.4.2.3.4 Test description

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables 12.4.2.3.4.1-3, 12.4.2.3.5-1 and 12.4.2.3.5-2. Cell transmits SSBs in DBT windows according to DL CCA model.

In this test measurement gap pattern configuration # 0 as defined in Table 12.4.2.3.4.1-3 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

12.4.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 12.4.2.3.4.1-1.

Table 12.4.2.3.4.1-1: Supported test configurations for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA

Configuration	Description
12.4.2.3-1	LTE FDD; NR with CCA: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
12.4.2.3-2	LTE TDD; NR with CCA: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note1: The UE is only required to pass in one of the supported test configurations above.	

Configure the test equipment and the DUT according to the parameters in Table 12.4.2.3.4.1-2.

Table 12.4.2.3.4.1-2: Initial conditions for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.10-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 12.4.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The test parameter settings are set up according to Tables 12.4.2.3.5-1 and 12.4.2.3.5-2.
2. Message contents are defined in clause 12.4.2.3.4.3.
3. Cell 1 is the E-UTRA serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is an NR cell (neighbor cell) in an unlicensed carrier subject to CCA and its power level is set according to clauses C.1.2 and C.1.3 for this test.

Table 12.4.2.3.4.1-3: General test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Chanel Number		1, 2	1	One FR1 NR carrier frequency under CCA is used.
DL CCA model			As specified in clause D.7.2.1	
UL CCA model			As specified in clause D.7.2.2	
L_{CCA_DL}		1, 2	12	
W_{CCA_DL}	ms	1, 2	$T_{PSS/SSS_sync_irat_cca}$	
Active cell		1, 2	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset		1, 2	39	As specified in TS 36.331 [29].
b2-Threshold1	dBm	1, 2	Note 1	E-UTRA RSRP threshold for measurement on cell 1 for event B2
b2-Threshold2NR	dBm	1, 2	Note 2	SS-RSRP threshold for measurement on cell 2 for event B2
Hysteresis	dB	1, 2	0	
CP length		1, 2	Normal	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 2	3µs	Synchronous cells.
T1	s	1, 2	5	
T2	s	1, 2	$\geq T_{identify_irat_cca_without_index}$	$T_{identify_irat_cca_without_index}$ is defined in clause 12.4.2.0
Note 1: The value of b2-Threshold1 is defined in Table 12.4.2.3.5-1 Note 2: The value of b2-Threshold2NR is defined in Table 12.4.2.3.5-2				

12.4.2.3.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}= P_{CCA_UL}=1$) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to T1 in Tables 12.4.2.3.5-1 and 12.4.2.3.5-2.
3. The SS shall transmit an *RRCConnectionReconfiguration* message configuring inter-RAT RSRP measurements on a target NR unlicensed carrier according to section 12.4.2.3.4.3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 12.4.2.3.5-1. T1 starts.

5. UE shall transmit a *MeasurementReport* message containing Cell 2 RSRP measurements obtained in the target unlicensed NR carrier. If the overall measurement reporting delay measured from the beginning of time period T1 is less than 1922 ms, then the number of successful tests is increased by one. If the UE fails to report the measurements within the overall delays measured requirement, then the number of failure tests is increased by one.

6. After the SS receives the *MeasurementReport* message in step 5, the SS shall transmit *RRCConnectionRelease* according to TS 36.508 [25] to release the LTE cell. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

7. Set Cell 2 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

8. Repeat step 1-7 until the confidence level according to Annex G clause G.2.7 is achieved.

12.4.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 12.4.2.3.4.3-1: Common Exception messages for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and EVENT B2; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 Table H.3.4-5 with Condition Pattern #0 Table H.3.4-8 with Condition SSB-Index Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

12.4.2.3.5 Test requirements

Tables 12.4.2.3.5-1 and 12.4.2.3.5-2 define the primary level settings including test tolerances for all tests for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA.

Table 12.4.2.3.5-1: E-UTRAN cell specific test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA

Parameter	**Unit**	**Configuration**	**Cell 1**	
			T1	**T2**
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel Note2		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns Note2		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note3				
OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2	17	17
RSRP Note5	dBm/15kHz	1, 2	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2	-87	-87
Io Note5	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2	AWGN	
Antenna Configuration and Correlation Matrix Note6		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 12.4.2.3.5-2: NR neighbor cell specific test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	2	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375	
OCNG Pattern		1, 2	OP.1	
SMTC configuration		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	

SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold2NR	dBm	1, 2	-98	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-98	
N_{oc} Note2	dBm/SCS	1, 2	-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-63.95	-56.16
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2	1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

12.4.2.4 E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA

12.4.2.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 12.4.2.0 for E-UTRAN-NR measurements under CCA.

12.4.2.4.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting RRM measurements on a shared spectrum NR carrier and long DRX cycle.

12.4.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 12.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.12.4.2.4.

12.4.2.4.4 Test description

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables 12.4.2.4.4.1-3, 12.4.2.4.5-1 and 12.4.2.4.5-2. Cell transmits SSBs in DBT windows according to DL CCA model.

In this test measurement gap pattern configuration # 0 as defined in Table 12.4.2.4.4.1-3 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

12.4.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 12.4.2.4.4.1-1.

Table 12.4.2.4.4.1-1: Supported test configurations for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA

Configuration	Description
12.4.2.4-1	LTE FDD; NR with CCA: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
12.4.2.4-2	LTE TDD; NR with CCA: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note1: The UE is only required to pass in one of the supported test configurations above.	

Configure the test equipment and the DUT according to the parameters in Table 12.4.2.4.4.1-2.

Table 12.4.2.4.4.1-2: Initial conditions for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.10-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 12.4.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The test parameter settings are set up according to Tables 12.4.2.4.5-1 and 12.4.2.4.5-2.
2. Message contents are defined in clause 12.4.2.4.4.3.

3. Cell 1 is the E-UTRA serving cell (PCell). The power levels and settings for Cell 1 are set according to Annex A.6B. Cell 2 is an NR cell (neighbor cell) in an unlicensed carrier subject to CCA and its power level is set according to clauses C.1.2 and C.1.3 for this test.

Table 12.4.2.4.4.1-3: General test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRAcarrier frequency is used.
NR RF Chanel Number		1, 2	1		One FR1 NR carrier frequency under CCA is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
DL CCA model			As specified in clause D.7.2.1		
UL CCA model			As specified in clause D.7.2.2		
L_{CCA_DL}		1, 2	12	5	
W_{CCA_DL}	ms	1, 2	$T_{PSS/SSS_sync_irat_cca}$		
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset		1, 2	39		As specified in TS 36.331 [29].
b2-Threshold1	dBm	1, 2	Note 1		E-UTRA RSRP threshold for measurement on cell 1 for event B2
b2-Threshold2NR	dBm	1, 2	Note 2		SS-RSRP threshold for measurement on cell 2 for event B2
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.9	DRX.12	As specified in clause A.5
Time offset between serving and neighbour cells		1, 2	3µs		Synchronous cells.
T1	s	1, 2	5		
T2	s	1, 2	≥$T_{identify_irat_cca_without_index}$		$T_{identify_irat_cca_without_index}$ is defined in clause 12.4.2.0
Note 1: The value of b2-Threshold1 is defined in Table 12.4.2.4.5-1 Note 2: The value of b2-Threshold2NR is defined in Table 12.4.2.4.5-2					

12.4.2.4.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to T1 in Tables 12.4.2.4.5-1 and 12.4.2.4.5-2.
3. The SS shall transmit an *RRCConnectionReconfiguration* message configuring inter-RAT RSRP measurements on a target NR unlicensed carrier according to section 12.4.2.4.4.3.
4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 12.4.2.4.5-1. T1 starts.

5. UE shall transmit a *MeasurementReport* message containing Cell 2 RSRP measurements obtained in the target unlicensed NR carrier. If the overall measurement reporting delay measured from the beginning of time period T1 is less than 2882 ms for Test 1 or 19842 ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the measurements within the overall delays measured requirement, then the number of failure tests is increased by one.

6. After the SS receives the *MeasurementReport* message in step 5, the SS shall transmit *RRCConnectionRelease* according to TS 36.508 [25] to release the LTE cell. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

7. Set Cell 2 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

8. Repeat step 1-7 until the confidence level according to Annex G clause G.2.7 is achieved.

9. Repeat step 1-8 for each subtest in Table 12.4.2.4.4.3-1.

12.4.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 12.4.2.4.4.3-1: Common Exception messages for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and EVENT B2; Table H.3.4-4 with Condition INTER-RAT NR, EVENT B2 Table H.3.4-5 with Condition Pattern #0 Table H.3.4-8 with Condition SSB-Index Table H.3.7-2 with Condition DRX.9 for Test 1, or Condition DRX.12 for Test 2 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

12.4.2.4.5 Test requirements

Tables 12.4.2.4.5-1 and 12.4.2.4.5-2 define the primary level settings including test tolerances for all tests for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA.

Table 12.4.2.4.5-1: E-UTRAN cell specific test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration[Note1]		2	6	
TDD uplink-downlink configuration[Note1]		2	1	
$BW_{channel}$	MHz	1, 2	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel Note2		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns Note2		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note3				
OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2	17	17
RSRP Note5	dBm/15kHz	1, 2	-87	-87
SCH_RP Note5	dBm/15kHz	1, 2	-87	-87
Io Note5	dBm/9MHz	1, 2	-59.13+10log ($N_{RB,c}$ /50)	-59.13+10log ($N_{RB,c}$ /50)
Propagation Condition Note6		1, 2	AWGN	
Antenna Configuration and Correlation Matrix Note6		1, 2	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 12.4.2.4.5-2: NR neighbor cell specific test parameters for E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c}$ = 106	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	P_{CCA_DL}=0.9375	
OCNG Pattern		1, 2	OP.1	
SMTC configuration		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	

SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold2NR	dBm	1, 2	-98	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-98	
N_{oc} Note2	dBm/SCS	1, 2	-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	-Infinity	7
Io Note3	dBm/38.16MHz	1, 2	-63.95	-56.16
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

In test 1 the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_with_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

12.4.2.5 Void

12.4.2.6 Void

12.5 Measurement Performance

12.5.1 E-UTRAN-NR SFTD

12.5.1.0 Minimum conformance requirements

12.5.1.0.1 Minimum conformance requitements for E-UTRAN-NR SFTD Accuracy Requirement under CCA

The SFN and frame timing difference (SFTD) is measured between PCell and NR PSCell under CCA in EN-DC, or between PCell and NR cell under CCA for inter-RAT SFTD. The inter-RAT SFTD measurement can only be configured for E-UTRA - NR band combinations that are supported by the UE.

The accuracy requirements in Table 12.5.1.0.1-2 are applicable under the following conditions:

For PCell SFN and frame timing measurement:

- Cell specific reference signals are transmitted either from one, two or four antenna ports.
- Conditions defined in TS 36.101 [27] clause 7.3 for reference sensitivity are fulfilled.
- No changes to the uplink transmission timing are applied during the measurement period.
- $RSRP|_{dBm}$ according to TS 36.133 [23] Annex B.3.5 for a corresponding Band.
- Io range defined in TS 36.133 [23] Table 9.1.27.1-1.

For NR PSCell, or NR cell SFN and frame timing measurement in FR1:

- Conditions defined in TS 38.101-1 [2] clause 7.3F for reference sensitivity are fulfilled.
- Io range defined in Table 12.5.1.0.1-1.

Table 12.5.1.0.1-1: NR PSCell, or NR cell Io range conditions for SFTD measurement accuracy with NR cell under CCA

Parameter	Io [Note 1] range			
	NR operating band groups [Note 4, 5]	Minimum Io [Note 2, 3]		Maximum Io
		dBm/ SCS_{SSB}		dBm/$BW_{Channel}$
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_CCA_FR1_I	-117	-114	-50
	NR_CCA_FR1_J	-116.5	-113.5	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The condition level is increased by $\Delta R_{IB,c}$ as defined in clause 7.3B in TS 38.101-3 [4], depending on E-UTRA – NR band combination.
NOTE 3: The condition level is increased by MSD as defined in clause 7.3B in TS 38.101-3 [4], if applicable depending on E-UTRA – NR band combination.
NOTE 4: NR operating band groups are as defined in clause 3.5 in TS 38.133 [6].
NOTE 5: Only NR bands within EN-DC band combinations as specified in clause 5.5B in TS 38.101-3 [4] are applicable.

Table 12.5.1.0.1-2: SFTD measurement accuracy with NR cell under CCA

Accuracy	Conditions	
	Ês/Iot	Frequency range
Ts [Note 1]	dB	
40	≥ -3 dB	FR1

NOTE 1: Ts is the basic timing unit defined in TS 36.211 [24].
NOTE 2: The parameter Ês/Iot is the minimum Ês/Iot of the pair of cells to which the requirement applies.

The normative reference for this requirement is TS 36.133 [23] clause 9.1.28.

12.5.1.1 E-UTRA - NR FR1 SFTD measurement accuracy under CCA

Editor's Note:

- MU and TT analysis is incomplete

12.5.1.1.1 Test purpose

The purpose of this test is to verify that the SFTD measurement accuracy is within the specified limits and to verify the requirements as specified in clause 12.5.1.0.1 for inter-RAT SFTD measurements between E-UTRA PCell and NR target cell under CCA.

12.5.1.1.2 Test applicability

This test applies to all types of E-UTRA UE release 16 and forward, supporting FR1 with a shared spectrum NR carrier and supporting inter-RAT SFTD measurements on a TDD NR cell.

12.5.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 12.5.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.12.5.1.1.

12.5.1.1.4 Test description

Two cells on different carriers are configured in this test: E-UTRA Cell 1 is the E-UTRAN PCell and Cell 2 is the inter-RAT NR FR1 neighbour cell under CCA.

12.5.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 12.5.1.1.4.1-1.

Table 12.5.1.1.4.1-1: Supported test configurations for E-UTRA - NR FR1 SFTD measurement accuracy under CCA

Config	Description
12.5.1.1-1	LTE FDD NR with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
12.5.1.1-2	LTE TDD NR with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 12.5.1.1.4.1-2.

Table 12.5.1.1.4.1-2: Initial conditions for E-UTRA - NR FR1 SFTD measurement accuracy under CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.10-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 12.5.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 12.5.1.1.4.3.

2. There are two carriers and two cells specified in the test, where E-UTRA Cell 1 is the E-UTRA PCell on the E-UTRA carrier and Cell 2 is the NR neighbour cell on the NR carrier under CCA. E-UTRA Cell 1 is configured according to TS 36.521-3 [26] clause C.1.0 and C.1.1.

3. The SFTD between PCell and NR neighbour cell shall be set to one of the conditions in Table 12.5.1.1.5-3. For negative Frame boundary offset, it can be achieved delaying NR neighbour cell in regards to PCell OR advancing PCell in regards to NR neighbour cell. For positive Frame boundary offset, it can be achieved delaying PCell in regards to NR neighbour cell OR advancing NR neighbour cell in regards to PCell. The DL CCA model is disabled (i.e. $P_{CCA_DL_i}$= 1) at the start of the test.

12.5.1.1.4.2 Test procedure

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

2. Set the parameters according to Table 12.5.1.1.5-1 and Table 12.5.1.1.5-3 as appropriate. (Condition = 3). The SS shall set the parameters of Cell 2 and enable DL CCA model according to Table 12.5.1.1.5-2.

3. The SS shall transmit an *RRCConnectionReconfiguration* message on Cell 1.

4. The UE shall transmit an *RRCConnectionReconfigurationComplete* message.

5. The UE shall transmit a *MeasurementReport* message triggered by SFTD measurement.

6. The SS shall check the reported values of SFN offset and frame boundary offset in the *MeasurementReport*. The SFN offset value and frame boundary offset value between E-UTRA Cell 1 and Cell 2 reported by the UE is compared to the expected SFN offset value and frame boundary offset, respectively. The number of failed iterations is increased by one, if

   - The value of *sfn-OffsetResult* is different with the expected SFN offset value, or

   - The value of *frameBoundaryOffsetResult* is outside the range given in Table 12.5.1.1.5-4, or

   - The UE fails to report the measurement value for Cell 2.

   Otherwise the number of successful iterations is increased by one.

7. After the RRC connection release, the SS shall disable the DL CCA model (i.e. PCCA_DL_i= 1) and:

   - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in State 3A according to TS 36.508 [25] clause 4.5.3A (if the paging fails, switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3); or

   - switches off and on the UE and ensures the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.

8. Repeat steps 1-7 until the confidence level according to Annex G.2.7 is achieved.

12.5.1.1.4.3 Message contents

Message contents are according to TS 36.508 [25] clause 7.3 with the following exceptions:

Table 12.5.1.1.4.3-1: Common Exception messages for E-UTRA - NR FR1 SFTD measurement accuracy under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.4-7 with Condition Inter-RAT and SFTD Table H.3.4-4 with Condition INTER-RAT NR, SFTD and GAPLESS Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

12.5.1.1.5 Test requirement

Table 12.5.1.1.5-1 and 12.5.1.1.5-2 defines the primary level settings including test tolerances for E-UTRA - NR FR1 SFTD measurement accuracy under CCA.

The SFN offset and frame boundary offset between E-UTRA PCell and the inter-RAT neighbour cell shall be set to one of the configurations in Table 12.5.1.1.5-3. The reported SFTD accuracy shall fulfil the accuracy requirements in Table 12.5.1.0.1-2. The SFN offset in reported SFTD shall match the values in Table 12.5.1.1.5-3 and the frame boundary offset in reported SFTD shall be within the range given in Table 12.5.1.1.5-4.

Table 12.5.1.1.5-1: E-UTRA cell specific test parameters for E-UTRA - NR FR1 SFTD measurement accuracy under CCA

Parameter	Unit	Test 1
E-UTRA RF Channel Number		1
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA[Note3]	dB	
OCNG_RB[Note3]	dB	
N_{oc}[Note4]	dBm/15 kHz	-104+TT
$\hat{E}_s/N_{oc}$	dB	-3+TT
$\hat{E}_s/I_{ot}$	dB	-3+TT
RSRP [Note5]	dBm/15 kHz	-107+TT
SCH_RP [Note5]	dBm/15 kHz	-107+TT
Io [Note5]	dBm/Ch BW	-74.45 +10log ($N_{RB,c}$ /50) +TT
Propagation Condition		AWGN
Antenna Configuration		1x2

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: Es/Iot, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 12.5.1.1.5-2: NR cell specific test parameters for E-UTRA - NR FR1 SFTD measurement accuracy under CCA

Parameter		Unit	Test 1
Duplex mode			TDD
TDD Configuration			TDDConf.1.1 CCA
$BW_{channel}$		MHz	40: $N_{RB,c}$ = 106
DL CCA model			As specified in clause D.7.2.1
DL CCA probability for semi-static channel access Note6,8	P_{CCA}		0.75
DL CCA probability for dynamic channel access Note7,8	$P_{CCA_DL_1}$		0.75
	$P_{CCA_DL_2}$		0.75
SSB configuration for semi-static channel access Note6,8			SSB.1 CCA
SSB configuration for dynamic channel access Note7,8			SSB.2 CCA
SMTC configuration			SMTC.1
DBT window configuration			DBT.1
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	-104+TT
N_{oc} Note2		dBm/SSB SCS	-101+TT
$\hat{E}_s/I_{ot}$		dB	-3+TT
$\hat{E}_s/N_{oc}$		dB	-3+TT
SS-RSRP Note3		dBm/SCS	-104+TT
Io Note3		dBm/38.16 MHz	-68.18+TT
Propagation condition			AWGN
Antenna configuration			1x2

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 6:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 8:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 12.5.1.1.5-3: Timing offsets for E-UTRA - NR FR1 SFTD measurement accuracy under CCA

Configuration	SFN offset between PCell and NR neighbor cell	Frame boundary offset between PCell and NR neighbour cell (Ts)
1	100	-122000
2	300	-60540
3	500	1000
4	700	62540
5	900	124000

Table 12.5.1.1.5-4: E-UTRA - NR FR1 SFTD measurement accuracy requirements for E-UTRA - NR FR1 SFTD measurement accuracy under CCA

Normal and Extreme Conditions	frameBoundaryOffsetResult				
	Condition 1	Condition 2	Condition 3	Condition 4	Condition 5
Lowest reported value	FFS	FFS	FFS	FFS	FFS
Highest reported value	FFS	FFS	FFS	FFS	FFS

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and inter-RAT NR target cell. The reported SFTD accuracy shall fulfil the requirement in clause 12.5.1.0.

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

13 NR Standalone Tests with NR SCell under CCA and All Other NR Cells in FR1

13.1 Void

13.2 Signalling Characteristics

13.2.2 SCell activation and deactivation delay

13.2.2.0 Minimum conformance requirements

13.2.2.0.1 Minimum conformance requirements for SCell activation and deactivation delay

Same as in clauses 10.3.3.0.1 for activation delay requirement and 10.3.3.0.2 for deactivation delay requirement.

13.2.2.1 NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

13.2.2.1.1 Test purpose

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell both under CCA, are within the requirements stated in clause 13.2.2.0.1, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 160 ms.

13.2.2.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier.

13.2.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.2.2.0.1 for SCell Activation Delay Requirement for Deactivated SCell under CCA and SCell Deactivation Delay Requirement for Activated SCell under CCA correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.13.2.2.1.

13.2.2.1.4 Test description

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two carriers, each with one cell: Cell 1 (PCell) on radio channel 1 (PCC) in NR, and Cell2 (SCell) on radio channel 2 (SCC) in NR with CCA. Before the test starts the UE is connected to Cell 1, but is not aware of Cell 2, as the UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. At the end of T1, the test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted *m*, defines the start of time period T2. The UE shall be able to report a valid CSI in PCell for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}}+T_{\text{activation_time_withCCA}}+T_{\text{CSI_Reporting_withCCA}}}{\text{NR slot length}}$, as defined in 38.133 [6] clause 8.3A.2. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $m+\frac{T_{\text{HARQ}}+3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption shall fall within the time window specified in 38.133 [6] clause 8.3A.2. At the end of T2 the test equipment sends a MAC message for deactivation of the SCell.

The point in time at which the MAC message is received by at the UE antenna connector, in a slot # denoted *n*, defines the start of time period T3. The UE shall complete the activation at latest in slot $n + \frac{T_{\text{HARQ}}+3\text{ms}}{\text{NR slot length}}$. Any PCell interruption shall fall within the time window specified in TS 38.133 [6] clause 8.3A.3.

13.2.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in this clause. The supported test configurations are shown in Table 13.2.2.1.4.1-1.

This test shall be tested using any of the test configurations in Table 13.2.2.1.4.1-1.

Table 13.2.2.1.4.1-1: Supported test configurations for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Configuration	Description
13.2.2.1-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.2.2.1-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.2.2.1-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note:	The UE is only required to be tested in one of the supported test configurations

Configure the test equipment and the DUT according to the parameters in Table 13.2.2.1.4.1-2.

Table 13.2.2.1.4.1-2: Initial conditions for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.11-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 13.2.2.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link - For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE part.		

Table 13.2.2.1.4.1-3: General test parameters for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two radio channels (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	µs	0	
Time alignment error between cell2 and cell1	µs	≤ TAE as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	k_1×NR slot length	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by *dl-DataToUL-ACK*, the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{CSI_Reporting}$	ms	$10 + 5 \cdot 2^{\mu_{DL}}$	The delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] μ_{DL} is the subcarrier spacing configuration for DL

1. Message contents are defined in clause 13.2.2.1.4.3.

2. Cell 1 and Cell 2 are NR FR1 cells with the power levels set according to clauses C.1.2 and C.1.3 for this test. Cell 1 is the PCell and Cell 2 is the deactivated SCell. In addition, Cell 2 is on an unlicensed carrier subject to CCA.

13.2.2.1.4.2 Test procedure

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received, while taking into account CCA failures on SCC.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Tables 13.2.2.1.4.1-3 and 13.2.2.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2. The SS shall enable DL and UL CCA model according to Table 13.2.2.1.5-1.

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1 and provide measurement configurations with the message content exceptions defined in clause 13.2.2.1.4.3.

3a. The UE sends a *MeasurementReport* message. If the TE doesn't receive the *MeasurementReport* during T1, go to step 9.

4. The SS shall configure transmission of PDSCH with a maximum number of 1 HARQ transmission.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m and T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

6. After at least one CSI-RS transmission occasion for channel measurement, the UE shall start sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell according to the following criteria:

   - If the first CSI report for SCell is received by the SS no later than slot s_{first_CSI} = m + 1 + $\frac{\mathrm{T_{HARQ}+3ms+}T_{CSI_Reporting_withCCA}}{NR\ slot\ length}$,

     - or slot $s^{int}_{first_CSI} = m + 1 + \frac{T_{HARQ}+3ms+T_{CSI_Reporting_withCCA}+T_X}{NR\ slot\ length}$ if the slot s_{first_CSI} was subject to interruption,

     - or the next CSI report occasion if there is no CSI report occasion in slots s_{first_CSI} or $s^{int}_{first_CSI}$,

   - and CSI report with non-zero CQI index is received by the SS earlier than or equal to slot $s_{nonzero_CQI}$ = m + $\frac{T_{\mathrm{HARQ}}+T_{\mathrm{activation_time_withCCA}}+T_{\mathrm{CSI_Reporting_withCCA}}}{\mathrm{NR\ slot\ length}}$,

     - or slot $s^{int}_{nonzero_CQI} = max\left(s^{int}_{first_CSI}, s_{nonzero_CQI}\right)$ if slot $s_{nonzero_CQI}$ was subject to interruption,

     - or the next available CSI report occasion if there is no CSI report occasion for reporting the valid CSI in slot $s_{nonzero_CQI}$, or slot $s^{int}_{nonzero_CQI}$ if $s_{nonzero_CQI}$ was subject to interruption,

   - and DTX is not observed by the SS outside the slot $m + 1 + \frac{T_{\mathrm{HARQ}}}{\mathrm{NR\ slot\ length}}$ to $m + 1 + \frac{T_{HARQ}+3ms+T_X}{NR\ slot\ length}$up to the end of T2

   - Then the number of successes for the event "Activation" is increased by one. Otherwise, count a fail for the event "Activation" and go to step 9.

7. When T2 expires, the SS deactivate SCC by sending the deactivation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted n and T3 starts in slot n. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 8, otherwise go to step 9.

8. The UE shall stop sending CSI reports for SCell and the SS shall monitor CSI reports for SCell sent from the UE and ACK/NACK sent in PCell during SCell deactivation.

   - If the last CSI report is received by the SS earlier than or equal to slot n + $\frac{\mathrm{T_{HARQ}}+3ms}{NR\ slot\ length}$

   - and DTX is not observed by the SS outside the slot n + 1 + $\frac{\mathrm{T_{HARQ}}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$ up to the end of T3,

   - Then the number of successes for the event "Deactivation" is increased by one. Otherwise, count a fail for the event "Deactivation".

9. When T3 expires, or Activation in step 5 was not acknowledged, or a fail was counted for the event “Activation” in step 6, or Deactivation in step 7 was not acknowledged, the SS shall transmit a RRCRelease message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources. The SS shall disable the CCA model (both DL and UL, i.e. PCCA_DL_i= PCCA_UL=1).

10. Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

11. After the RRC connection release, the SS:
    - transmits in Cell 1 a Paging message (including PagingRecord with UE-Identity) for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5),
    or
    - switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

12. Repeat steps 2-11 until a test verdict has been achieved.

Each of the events "Activation" and "Deactivation" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Annex G.2.7 is achieved. Different events may require different times for a verdict. If all events pass, the test passes. If one event fails, the test fails.

13.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 13.2.2.1.4.3-1: Common Exception messages for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1 CCA

Table 13.2.2.1.4.3-2: *RRCReconfiguration*: SCell addition for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add

Information Element	Value/remark	Comment	Condition
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig	Table 13.2.2.1.4.3-2A	
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell	Table 13.2.2.1.4.3-5	
}			
}			
}			
}			

Table 13.2.2.1.4.3-2A: *MeasConfig* (Table 13.2.2.1.4.3-2) for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Derivation path: Table H.3.1-2 with condition Deactivated SCell			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	2 entries		
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR for SCell	entry 2 Table 13.2.2.1.4.3-3	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	1 entry		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	ReportConfigId		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR	Table 13.2.2.1.4.3-4	
}			
}			
}			
}			

Table 13.2.2.1.4.3-3: *MeasObjectNR* for SCell for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf160		
}			

Table 13.2.2.1.4.3-4: *ReportConfigNR* for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: Table H.3.1-4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			

eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-30	To ensure reporting can always be triggered	
}			
}			
}			
}			
}			
}			

Table 13.2.2.1.4.3-5: *CellGroupConfig-SCell* (Table 13.2.2.1.4.3-2) for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
servCellIndex	Not present	PCell always uses servCellIndex=0	
reconfigurationWithSync	Not present		
rlf-TimersAndConstants	Not present		
rlmInSyncOutOfSyncThreshold	Not present		
spCellConfigDedicated	ServingCellConfig-SpCell	Table 13.2.2.1.4.3-6	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 13.2.2.1.4.3-7	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 13.2.2.1.4.3-6: *ServingCellConfig-SpCell* (Table 13.2.2.1.4.3-5) for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	1		
}			

Table 13.2.2.1.4.3-7: *ServingCellConfig-SCell* (Table 13.2.2.1.4.3-5) for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
servingCellMO	2		
}			

13.2.2.1.5 Test requirements

Table 13.2.2.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle.

Table 13.2.2.1.5-1: Cell specific test parameters for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		FDD			TDD		
	Config 2,3		TDD					
TDD configuration	Config 1		---			TDDConf.1.1 CCA		
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			40: $N_{RB,c}$ = 106		
	Config 3		40: $N_{RB,c}$ = 106					
DL CCA model			---			As specified in clause D.7.2.1		
DL CCA probability for semi-static channel access Note5,7	P_{CCA_DL}		---			0.9357		
DL CCA probability for dynamic channel access Note6,7	$P_{CCA_DL_1}$		---			0.75		
	$P_{CCA_DL_2}$		---			0.75		
P_{CCA_UL}						1		
L_{CCA_DL} Note 8						2		
W_{CCA_DL} Note 8		ms				$T_{activation_time_withCCA}$		
Initial downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Initial uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
Dedicated downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Dedicated uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
TCI state			TCI.State.0			TCI.State.0		
TRS Configuration	Config 1		TRS.1.1 FDD			TRS.1.2 TDD		
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			SR.1.1 CCA		
	Config 2		SR.1.1 TDD					
	Config 3		SR.2.1 TDD					
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD			CCR.1.3 CCA		
	Config 2		CCR.1.1 TDD					
	Config 3		CCR.2.1 TDD					
RMSI CORESET parameters	Config 1		CR.1.1 FDD			CR.1.1 CCA		
	Config 2		CR.1.1 TDD					
	Config 3		CR.2.1 TDD					
OCNG Patterns Note1			OP.1			OP.1		
SSB Configuration for semi-static channel access Note5,7	Config 1,2		SSB.1 FR1			SSB.1 CCA		
	Config 3		SSB.2 FR1					
SSB Configuration for dynamic channel access Note6,7	Config 1,2		SSB.1 FR1			SSB.2 CCA		
	Config 3		SSB.2 FR1					
SMTC configuration			SMTC.1			SMTC.1		
DBT window configuration			---			DBT.1		
EPRE ratio of PSS to SSS		dB	0			0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS Note1								

EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	Config 1,2	dBm/15kHz	-104	-104
	Config 3			
N_{oc} Note2	Config 1,2	dBm/SCS	-104	-101
	Config 3		-101	
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-87	-84
	Config 3		-84	-84
Io Note3	Config 1,2		-58.96	-52.87
	Config 3		-52.87	-52.87
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For Cell 2 with CCA model, OCNG is transmitted only in slots with downlink transmission bursts and is not transmitted during muted slots or during DBT windows.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8: As specified in 38.133 [6] clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

During T2, the UE shall send the first CSI report for SCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $m+1+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$ and no later than slot $m+1+\frac{T_{HARQ}+3ms+T_{CSI_Reporting_withCCA}}{NR\ slot\ length}$.

During T2, conditioned on that downlink CCA failures L_1 and $L_{2,2}$ experienced in the SCell fulfill $L_1 \leq L_{1,max}$ and $L_{2,2} \leq L_{2,2,max}$ with $L_{1,max} = 2$ and $L_{2,2,max} = 2$, respectively, the UE shall send the first valid CSI report (non-zero CQI) for the SCell no later than slot $m+\frac{T_{HARQ}+T_{activation_time_withCCA}+T_{CSI_Reporting_withCCA}}{NR\ slot\ length}$, where $T_{activation_time_withCCA} = T_{FirstSSB} + L_1*T_{rs}$ + 5ms and $T_{CSI_reporting_withCCA} = T_{CSI_reporting} + L_{2,2}*T_{CSI\text{-}RS} + T_{CSI_ReportingDelay}$, as specified in 38.133 [6] clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in 38.133 [6] clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot $m+1+\frac{T_{HARQ}}{NR\ slot\ length}$ to slot $m+1+\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB}$.

During T3, interruption on PCell shall not occur outside slot $n+1+T_{HARQ}$/NR_slot_length to slot $n+1+(T_{HARQ}+3ms)$/NR_slot_length.

The interruption on PCell shall not be more than specified for SA in 38.133 [6] clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

13.2.2.2 NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle

13.2.2.2.1 Test purpose

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell under CCA, are within the requirements stated in clause 13.2.2.0.1, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 640 ms.

13.2.2.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier.

13.2.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.2.2.0.1 for SCell Activation Delay Requirement for Deactivated SCell under CCA and SCell Deactivation Delay Requirement for Activated SCell under CCA correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.13.2.2.2.

13.2.2.2.4 Test description

Same test description as in section 13.2.2.1.4.

13.2.2.2.4.1 Initial conditions

Same initial conditions as described in section 13.2.2.1.4.1 with following exception:

- The listed parameter values in Tables 13.2.2.2.4.1-3 will replace the values of corresponding parameters in Tables 13.2.2.1.4.1-3.

Table 13.2.2.2.4.1-3: General test parameters for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

13.2.2.2.4.2 Test procedure

Same test procedure as described in section 13.2.2.1.4.2.

13.2.2.2.4.3 Message contents

Same message contents as described in section 13.2.2.1.4.3 with following exception:

- Table 13.2.2.1.4.3-3 is replaced by Table 13.2.2.2.4.3-1.

Table 13.2.2.2.4.3-1: *MeasObjectNR* for SCell for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle

Derivation Path: Table H.3.1-3 with condition Deactivated SCell and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
smtc1	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
measCycleSCell-v1530	sf640		
}			

13.2.2.2.5 Test requirements

Table 13.2.2.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle.

Table 13.2.2.2.5-1: Cell specific test parameters for NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle

Parameter	Unit	Cell 1	Cell 2

			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		FDD			TDD		
	Config 2,3		TDD					
TDD configuration	Config 1		---			TDDConf.1.1 CCA		
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			40: $N_{RB,c}$ = 106		
	Config 3		40: $N_{RB,c}$ = 106					
DL CCA model			---			As specified in clause D.7.2.1		
DL CCA probability for semi-static channel access Note5,7	P_{CCA_DL}		---			0.9357		
DL CCA probability for dynamic channel access Note6,7	$P_{CCA_DL_1}$		---			0.75		
	$P_{CCA_DL_2}$		---			0.75		
P_{CCA_UL}						1		
L_{CCA_DL} Note 8						2		
W_{CCA_DL} Note 8		ms				$T_{activation_time_withCCA}$		
Initial downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Initial uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
Dedicated downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Dedicated uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
TCI state			TCI.State.0			TCI.State.0		
TRS Configuration	Config 1		TRS.1.1 FDD			TRS.1.2 TDD		
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			SR.1.1 CCA		
	Config 2		SR.1.1 TDD					
	Config 3		SR.2.1 TDD					
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD			CCR.1.3 CCA		
	Config 2		CCR.1.1 TDD					
	Config 3		CCR.2.1 TDD					
RMSI CORESET parameters	Config 1		CR.1.1 FDD			CR.1.1 CCA		
	Config 2		CR.1.1 TDD					
	Config 3		CR.2.1 TDD					
OCNG Patterns Note1			OP.1			OP.1		
SSB Configuration for semi-static channel access Note5,7	Config 1,2		SSB.1 FR1			SSB.1 CCA		
	Config 3		SSB.2 FR1					
SSB Configuration for dynamic channel access Note6,7	Config 1,2		SSB.1 FR1			SSB.2 CCA		
	Config 3		SSB.2 FR1					
SMTC configuration			SMTC.1			SMTC.1		
DBT window configuration			---			DBT.1		
EPRE ratio of PSS to SSS		dB	0			0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS Note1								
EPRE ratio of OCNG to OCNG DMRS Note1								
N_{oc} Note2	Config 1,2	dBm/15kHz	-104			-104		
	Config 3							
N_{oc} Note2	Config 1,2	dBm/SCS	-104			-101		
	Config 3		-101					
$\hat{E}_s/I_{ot}$		dB	17			17		
$\hat{E}_s/N_{oc}$		dB	17			17		
SS-RSRP Note3	Config 1,2	dBm/SCS	-87			-84		
	Config 3		-84			-84		
Io Note3	Config 1,2		-58.96			-52.87		
	Config 3		-52.87			-52.87		
Propagation condition		-	AWGN					

Note 1:	OCNG shall be used such that resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For Cell 2 with CCA model, OCNG is transmitted only in slots with downlink transmission bursts and is not transmitted during muted slots or during DBT windows.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8:	As specified in 38.133 [6] clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [8] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot m + (T_{HARQ}+$T_{activation_time_withCCA}$ + $T_{CSI_Reporting_withCCA}$)/NR_slot_length, where $T_{activation_time_withCCA}$ = $T_{FirstSSB_MAX}$ + $L_{2,1}$*T_{SMTC_MAX} + (1 +$L_{2,2}$)*T_{rs} + 5ms, as specified in TS 38.133 [6] clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in TS 38.133 [6] clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot m +1+$\frac{T_{HARQ}}{NR\ slot\ length}$ to slot m +1+$\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with T_X = $T_{FirstSSB_MAX}$ + $L_{2,1}$* T_{SMTC_MAX}.

During T3, interruption on PCell shall not occur outside slot n +1+T_{HARQ}/NR_slot_length to slot n+1+(T_{HARQ} +3ms)/NR_slot_length.

The interruption on PCell shall not be more than specified for SA in TS 38.133 [6] clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

13.2.2.3 NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA

13.2.2.3.1 Test purpose

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell under CCA, are within the requirements stated in clause 13.2.2.0.1, when the SCell is unknown to the UE at the time of activation.

13.2.2.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier.

13.2.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.2.2.0.1 for SCell Activation Delay Requirement for Deactivated SCell under CCA and SCell Deactivation Delay Requirement for Activated SCell under CCA correspondingly.

The normative reference for this requirement is TS 38.133 [6] clause A.13.2.2.3.

13.2.2.3.4 Test description

Same test description as described in section 13.2.2.1.4.

13.2.2.3.4.1 Initial conditions

Same initial conditions as described in section 13.2.2.1.4.1 with following exception:

- The listed parameter values in Tables 13.2.2.3.4.1-3 will replace the values of corresponding parameters in Tables 13.2.2.1.4.1-3.

Table 13.2.2.3.4.1-3: General test parameters for NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA

Parameter	Unit	Value	Comment
T1	s	0.1	During this time period the PCell shall be known and the SCell configured, but not detected.

13.2.2.3.4.2 Test procedure

Same test procedure as described in section 13.2.2.1.4.2, except step 3 and step 5 are replaced by following steps:

3. T1 starts. Immediately after, the SS shall configure SCell (Cell 2) on the SCC as per TS 38.508-1 [14] clause 7.5.1. The SCell (Cell 2) shall be powered OFF till T2 starts.

5. The SS activates SCC by sending the activation MAC-CE (Refer TS 38.321 [12], clauses 5.9, 6.1.3.10) in a slot # denoted m, power ON the SCell (Cell2), T2 starts in slot m. If the SS receives ACK for MAC-CE sent by the UE, the test proceeds to step 6, otherwise go to step 9.

and:

- Step 3a is removed.

13.2.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with condition SCELL_CSI_ON_SPCELL with the following exceptions:

Table 13.2.2.3.4.3-1: Common Exception messages for NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-7 with Condition Deactivated SCell Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1 CCA

Table 13.2.2.3.4.3-2: *RRCReconfiguration* in step 3: SCell addition for NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 13.2.2.3.4.3-3	
}			
}			
}			
}			

Table 13.2.2.3.4.3-3: *CellGroupConfig* (Table 13.2.2.3.4.3-2) for NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
spCellConfigDedicated	ServingCellConfig-SpCell	Table 13.2.2.3.4.3-4	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellConfigDedicated	ServingCellConfig-SCell	Table 13.2.2.3.4.3-5	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		
}			
}			
}			

Table 13.2.2.3.4.3-4: *ServingCellConfig-SpCell* (Table 13.2.2.3.4.3-3) for NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

Table 13.2.2.3.4.3-5: *ServingCellConfig-SCell* (Table 13.2.2.3.4.3-3) NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition No_UL			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
csi-MeasConfig	CSI-MeasConfig for RRM specified in TS 38.508-1 [14] Table 7.3.1-6		
}			

13.2.2.3.5 Test requirements

Table 13.2.2.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA.

Table 13.2.2.3.5-1: Cell specific test parameters for NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA

Parameter		**Unit**	**Cell 1**			**Cell 2**		
			T1	**T2**	**T3**	**T1**	**T2**	**T3**
Duplex mode	Config 1		FDD			TDD		
	Config 2,3		TDD					
TDD configuration	Config 1		---			TDDConf.1.1 CCA		
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52			40: $N_{RB,c}$ = 106		
	Config 3		40: $N_{RB,c}$ = 106					

DL CCA model			---	As specified in clause D.7.2.1
DL CCA probability for semi-static channel access Note5,7	P_{CCA_DL}		---	0.9357
DL CCA probability for dynamic channel access Note6,7	$P_{CCA_DL_1}$		---	0.75
	$P_{CCA_DL_2}$		---	0.75
P_{CCA_UL}				1
L_{CCA_DL} Note 8				2
W_{CCA_DL} Note 8		ms		$T_{activation_time_withCCA}$
Initial downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Initial uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
Dedicated downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Dedicated uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
TCI state			TCI.State.0	TCI.State.0
TRS Configuration	Config 1		TRS.1.1 FDD	TRS.1.2 TDD
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 CCA
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.1.3 CCA
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.1.1 CCA
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
OCNG Patterns Note1			OP.1	OP.1
SSB Configuration for semi-static channel access Note5,7	Config 1,2		SSB.1 FR1	SSB.1 CCA
	Config 3		SSB.2 FR1	
SSB Configuration for dynamic channel access Note6,7	Config 1,2		SSB.1 FR1	SSB.2 CCA
	Config 3		SSB.2 FR1	
SMTC configuration			SMTC.1	SMTC.1
DBT window configuration			---	DBT.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note1				
EPRE ratio of OCNG to OCNG DMRS Note1				
N_{oc} Note2	Config 1,2	dBm/15kHz	-104	-104
	Config 3			
N_{oc} Note2	Config 1,2	dBm/SCS	-104	-101
	Config 3		-101	
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
SS-RSRP Note3	Config 1,2	dBm/SCS	-87	-84
	Config 3		-84	-84
Io Note3	Config 1,2		-58.96	-52.87
	Config 3		-52.87	-52.87
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For Cell 2 with CCA model, OCNG is transmitted only in slots with downlink transmission bursts and is not transmitted during muted slots or during DBT windows.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8:	As specified in 38.133 [6] clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

During T2, the UE shall send the first CSI report for SCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $m+1+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$ and no later than slot $m+1+\frac{T_{HARQ}+3ms+T_{CSI_Reporting_withCCA}}{NR\ slot\ length}$.

During T2, conditioned on that downlink CCA failures $L_{3,1}$ and $L_{3,2}$ experienced in the SCell fulfill $L_{3,1} \leq L_{3,1,max}$ and $L_{3,2} \leq L_{3,2,max}$ with $L_{3,1,max} = 2$ and $L_{3,2,max} = 2$, respectively, the UE shall send the first valid CSI report (non-zero CQI) for the SCell no later than slot $m+\frac{T_{HARQ}+T_{activation_time_withCCA}+T_{CSI_Reporting_withCCA}}{NR\ slot\ length}$, where $T_{activation_time_withCCA} = T_{FirstSSB_MAX} + (1 + L_{3,1})*T_{SMTC_MAX} + (2 + L_{3,2})*T_{rs} + 5ms$ and $T_{CSI_reporting_withCCA} = T_{CSI_reporting} + T_{CSI_ReportingDelay}$, as specified in 38.133 [6] clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in 38.133 [6] clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot $m +1+\frac{T_{HARQ}}{NR\ slot\ length}$ to slot $m +1+\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB}$.

During T3, interruption on PCell shall not occur outside slot $n +1+T_{HARQ}$/NR_slot_length to slot $n+1+(T_{HARQ}+3ms)$/NR_slot_length.

The interruption on PCell shall not be more than specified for SA in 38.133 [6] clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

13.3 Measurement Procedure

13.3.1 Intra-frequency measurements

13.3.1.0 Minimum Conformance Requirements

13.3.1.0.1 Minimum conformance requitements for intra-frequency measurements without measurement gaps

13.3.1.0.1.1 Intra-frequency cell identification

Same as in clause 10.4.1.0.1.1.

13.3.1.0.1.2 Measurement period

Same as in clause 10.4.1.0.1.2.

13.3.1.0.2 Minimum conformance requitements for intra-frequency measurements with measurement gaps

13.3.1.0.2.1 Intra-frequency cell identification

Same as in clause 10.4.1.0.2.1

13.3.1.0.2.2 Intra-frequency measurement period

Same as in clause 10.4.1.0.2.2

13.3.1.1 NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under non-DRX

13.3.1.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 13.3.1.0.1.1 and 13.3.1.0.1.2.

13.3.1.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with an unlicensed carrier and RRM measurements on shared channel access.

13.3.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.3.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.3.1.1.

13.3.1.1.4 Test description

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table 13.3.1.1.4.1-1 and 13.3.1.1.4.1-3 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

13.3.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.3.1.1.4.1-1.

Table 13.3.1.1.4.1-1: Supported test configurations for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under non-DRX

Configuration	Description
13.3.1.1-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.1.1-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.1.1-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 13.3.1.1.4.1-2.

Table 13.3.1.1.4.1-2: Initial conditions for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.3.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 13.3.1.1.4.1-3.

2. Message contents are defined in clause 13.3.1.1.4.3.

3. There are two NR carriers and three cells specified in the test. Cell 1 is the serving cell (PCell) on one NR carrier and Cell2, Cell 3 belong to another NR carrier subject to CCA. Cell 2 is the SCell and Cell 3 is it's intra-frequency neighbor cell. The power levels and settings for Cell 1, Cell 2 and Cell 3 are set according to Annex C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 13.3.1.1.4.1-3: General test parameters for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under non-DRX

Paramater	Unit	Test Configuration	Value	Comment
Active PCell		1, 2, 3	Cell 1	
Active SCell		1, 2, 3	Cell 2	
Neighbour cell		1, 2, 3	Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3	
DL CCA model			As specified in clause D.7.2.1	
UL CCA model			As specified in clause D.7.2.2	
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: DBT.1	
A3-Offset	dB	1, 2, 3	-4.5	
Event A3 measurement quantity			SS-RSRP	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between Cell 1 and Cell 2		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
deriveSSB-IndexFromCell		1	*False*	
		2	*True*	
		3	*True*	
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

13.3.1.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE.

2. Set the parameters according to T1 in Table 13.3.1.1.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured with the corresponding offset according to Table 13.3.1.1.4.1-3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 13.3.1.1.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 13.3.1.1.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delay measured from the beginning of time period T2 is less than 842 ms, then the number of successful tests is increased by one. If the

UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection.

   OR

   - switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1). Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE (if the paging fails, switches off and on the UE),
     OR:

   - if the device has been switched off, switches on the UE.

10. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.7 is achieved.

13.3.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.3.1.1.4.3-1: Common Exception messages for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 for configuration 13.3.1.1-1 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 and synchronous cells for configurations 13.3.1.1-2 and 13.3.1.1-3 Table H.3.1-4 with A3-offset set as per Table 13.3.1.1.4.1-3 Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

13.3.1.1.5 Test requirements

Tables 13.3.1.1.4.1-3 and 13.3.1.1.5-1 define the primary level settings including test tolerances for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under non-DRX.

Table 13.3.1.1.5-1: Cell specific test parameters for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under non-DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2		2	
Duplex mode		Config 1	FDD		TDD		TDD	
		Config 2,3	TDD		TDD		TDD	
TDD configuration		Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	

			Config 2	TDDConf.1.1	TDDConf.1.1 CCA	TDDConf.1.1 CCA
			Config 3	TDDConf.2.1	TDDConf.1.1 CCA	TDDConf.1.1 CCA
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable	P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable	P_{CCA_UL}=1	P_{CCA_UL}=1
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable	P_{CCA_UL}=1	P_{CCA_UL}=1
L_{CCA_DL}			Config 1,2,3	Not Applicable	12	12
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	DLBWP.0.1	
	Initial UL BWP			ULBWP.0.1	ULBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	DBT.1	DBT.1
SMTC configuration			Config 1,2,3	SMTC.1	SMTC.1	SMTC.1
		kHz	Config 1	15	30	30

PDSCH/PDCCH subcarrier spacing		Config 2	15		30		30	
		Config 3	30		30		30	
EPRE ratio of PSS to SSS		Config 1,2,3	0		0		0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/ 15kHz	Config 1,2,3	-98		-98		-98	
N_{oc} Note2	dBm/ SCS	Config 1,2	-98		-95		-95	
		Config 3	-95		-95		-95	
SS-RSRP Note 3	dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	4	-3.79	-Infinity	1.54
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	4	4	-Infinity	7
Io Note3	dBm/ ChBW	Config 1,2	-64.59	-64.59	-58.49	-54.64	-58.49	-54.64
	dBm/ ChBW	Config 3	-58.49	-58.49	-58.49	-54.64	-58.49	-54.64
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_intra_without_index_CCA}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{identify_intra_cca_without_index} = (T_{PSS/SSS_sync_intra_cca} + T_{SSB_measurement_period_intra_cca})$ ms, where

$T_{PSS/SSS_sync_intra_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.1.0.1.1-1.

$T_{SSB_measurement_period_intra_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.1.0.1.2-1.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

13.3.1.2 NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under DRX

13.3.1.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 13.3.1.0.1.1 and 13.3.1.0.1.2.

13.3.1.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with an unlicensed carrier, RRM measurements on shared channel access and long DRX cycle.

13.3.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.3.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.3.1.2.

13.3.1.2.4 Test description

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table 13.3.1.2.4.1-1 and 13.3.1.2.4.1-3 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

13.3.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.3.1.2.4.1-1.

Table 13.3.1.2.4.1-1: Supported test configurations for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under DRX

Configuration	Description
13.3.1.2-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.1.2-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.1.2-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 13.3.1.2.4.1-2.

Table 13.3.1.2.4.1-2: Initial conditions for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under DRX

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.	
Channel bandwidth	As specified by the test configuration selected from Table 13.3.1.2.4.1-1.	

Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 13.3.1.2.4.1-3.
2. Message contents are defined in clause 13.3.1.2.4.3.
3. There are two NR carriers and three cells specified in the test. Cell 1 is the serving cell (PCell) on one NR carrier and Cell2, Cell 3 belong to another NR carrier subject to CCA. Cell 2 is the SCell and Cell 3 is it's intra-frequency neighbor cell. The power levels and settings for Cell 1, Cell 2 and Cell 3 are set according to Annex C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 13.3.1.2.4.1-3: General test parameters for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under DRX

Parameter	Unit	Test Configuration	Value		Comment
			Test 1	Test 2	
Active PCell		1, 2, 3	Cell 1		
Active SCell		1, 2, 3	Cell 2		
Neighbour cell		1, 2, 3	Cell 3		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3		
DL CCA model			As specified in clause D.7.2.1		
UL CCA model			As specified in clause D.7.2.2		
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: DBT.1		
A3-Offset	dB	1, 2, 3	-4.5		
Event A3 measurement quantity			SS-RSRP		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used
DRX		1, 2, 3	DRX.1	DRX.2	
Time offset between Cell 1 and Cell 2		1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs		Synchronous cells
		3	3 μs		Synchronous cells
deriveSSB-IndexFromCell		1	*False*		
		2	*True*		
		3	*True*		
T1	s	1, 2, 3	5		
T2	s	1, 2, 3	5	20	

13.3.1.2.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furhtermore UE is allocated with PUSCH resource

at every DRX cycle. In Test 2 when DRX = 640 ms is used, the uplink time alignment is not maintained and the UE needs to use RACH to obtain uplink allocation for measurement reporting.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE.

2. Set the parameters according to T1 in Table 13.3.1.2.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured with the corresponding offset according to Table 13.3.1.2.4.1-3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 13.3.1.2.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 13.3.1.2.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delay measured from the beginning of time period T2 is less than 1442 ms for Test 1 or less than 10242 ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection.

   OR

   - switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1). Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE (if the paging fails, switches off and on the UE),
     OR:

   - if the device has been switched off, switches on the UE.

10. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11. Repeat step 1-10 for each sub-test in Tables 13.3.1.2.4.1-3 and 13.3.1.2.5-1 as appropriate.

13.3.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.3.1.2.4.3-1: Common Exception messages for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under DRX

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 for configuration 13.3.1.2-1 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 and synchronous cells for configurations 13.3.1.2-2 and 13.3.1.2-3 Table H.3.1-4 with A3-offset set as per Table 13.3.1.2.4.1-3 Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.7-1 with Condition DRX.1 (Test 1) and DRX.2 (Test 2) Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

13.3.1.2.5 Test requirements

Tables 13.3.1.2.4.1-3 and 13.3.1.2.5-1 define the primary level settings including test tolerances for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under DRX.

Table 13.3.1.2.5-1: Cell specific test parameters for NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under DRX

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		2	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2,3	Not Applicable		12		12	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		DLBWP.0.1			
	Initial UL BWP			ULBWP.0.1		ULBWP.0.1			

	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	DBT.1	DBT.1
SMTC configuration			Config 1,2,3	SMTC.1	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	Config 1,2,3	-98	-98	-98
			Config 1,2	-98	-95	-95

N_{oc} Note2	dBm/ SCS	Config 3	-95		-95		-95	
SS-RSRP Note 3	dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	-3.79	-Infinity	1.54
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
Io Note3	dBm/ ChBW	Config 1,2	-64.59	-64.59	-58.49	-54.64	-58.49	-54.64
	dBm/ ChBW	Config 3	-58.49	-58.49	-58.49	-54.64	-58.49	-54.64
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_intra_without_index_CCA}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{identify_intra_cca_without_index} = (T_{PSS/SSS_sync_intra_cca} + T_{SSB_measurement_period_intra_cca})$ ms, where

$T_{PSS/SSS_sync_intra_cca}$: it is the time period used in PSS/SSS detection given in 10.4.1.0.1.1-1.

$T_{SSB_measurement_period_intra_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.1.0.1.2-1.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

13.3.1.3 NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX

13.3.1.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 13.3.1.0.2.1 and 13.3.1.0.2.2.

13.3.1.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with an unlicensed carrier, RRM measurements on shared channel access and BWP operation without bandwidth restriction.

13.3.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.3.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.3.1.3.

13.3.1.3.4 Test description

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table 13.3.1.3.4.1-1 and 13.3.1.3.4.1-3 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

13.3.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.3.1.3.4.1-1.

Table 13.3.1.3.4.1-1: Supported test configurations for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX

Configuration	Description
13.3.1.3-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.1.3-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.1.3-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 13.3.1.3.4.1-2.

Table 13.3.1.3.4.1-2: Initial conditions for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.3.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 13.3.1.3.4.1-3.
2. Message contents are defined in clause 13.3.1.3.4.3.
3. There are two NR carriers and three cells specified in the test. Cell 1 is the serving cell (PCell) on one NR carrier and Cell2, Cell 3 belong to another NR carrier subject to CCA. Cell 2 is the SCell and Cell 3 is it's intra-frequency neighbor cell. The power levels and settings for Cell 1, Cell 2 and Cell 3 are set according to Annex C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 13.3.1.3.4.1-3: General test parameters for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX

Paramater	Unit	Test Configuration	Value	Comment
Active PCell		1, 2, 3	Cell 1	
Active SCell		1, 2, 3	Cell 2	
Neighbour cell		1, 2, 3	Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3	
Measurement gap type		1, 2, 3	Per-UE gaps	

Measurement gap repitition periodicity	ms	1, 2, 3	40	
Measurement gap length	ms	1, 2, 3	6	
Measurement gap offset	ms	1, 2, 3	39	
DL CCA model			As specified in clause D.7.2.1	
UL CCA model			As specified in clause D.7.2.2	
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: DBT.1	
CSI-RS parameters in Cell 1		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
Event A3 measurement quantity			SS-RSRP	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between Cell 1 and Cell 2		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
deriveSSB-IndexFromCell		1	*False*	
		2	*True*	
		3	*True*	
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

13.3.1.3.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

There are two BWPs configured in Cell 1, BWP0 which contains the cell defining SSB, and BWP1 which does not contain any SSB of Cell 1. During the whole test, BWP1 is always scheduled as the active BWP for the UE.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE.

2. Set the parameters according to T1 in Table 13.3.1.3.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured with the corresponding offset according to Table 13.3.1.3.4.1-3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 13.3.1.3.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 13.3.1.3.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delay measured from the beginning of time period T2 is less than 1082 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection.

   OR

- switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1). Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE (if the paging fails, switches off and on the UE),
     OR:

   - if the device has been switched off, switches on the UE.

10. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.7 is achieved.

13.3.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.3.1.3.4.3-1: Common Exception messages for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 for configuration 13.3.1.3-1 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 and synchronous cells for configurations 13.3.1.3-2 and 13.3.1.3-3 Table H.3.1-4 with A3-offset set as per Table 13.3.1.3.4.1-3 and SSB Index Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 with gap offset 39 Table H.3.1-7 with Condition INTRA-FREQ and SSB Index Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 13.3.1.3.4.3-2: *ServingCellConfig* for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.1 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP1)	BWP1
defaultDownlinkBWP-Id	0	Initial BWP (BWP0)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.1 configuration	
}			

firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP1)	BWP1
}			
}			

13.3.1.3.5 Test requirements

Tables 13.3.1.3.4.1-3 and 13.3.1.3.5-1 define the primary level settings including test tolerances for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX.

Table 13.3.1.3.5-1: Cell specific test parameters for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		2	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2,3	Not Applicable		12		12	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		DLBWP.0.1			
	Initial UL BWP			ULBWP.0.1		ULBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1		DLBWP.1.1			
	Dedicated UL BWP			ULBWP.1.1		ULBWP.1.1			
TRS configuration			Config 1	TRS.1.1 FDD		TRS.1.2 TDD			
			Config 2	TRS.1.1 TDD		TRS.1.2 TDD			
			Config 3	TRS.1.2 TDD		TRS.1.2 TDD			

OCNG Pattern			Config 1,2,3	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		SR.1.1 CCA			
			Config 2	SR.1.1 TDD		SR.1.1 CCA			
			Config 3	SR2.1 TDD		SR.1.1 CCA			
CORESET Reference Channel			Config 1	CR.1.1 FDD		CR.1.1 CCA			
			Config 2	CR.1.1 TDD		CR.1.1 CCA			
			Config 3	CR2.1 TDD		CR.1.1 CCA			
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1		SSB.1 CCA		SSB.1 CCA	
			Config 2	SSB.1 FR1		SSB.1 CCA		SSB.1 CCA	
			Config 3	SSB.2 FR1		SSB.1 CCA		SSB.1 CCA	
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1		SSB.2 CCA		SSB.2 CCA	
			Config 2	SSB.1 FR1		SSB.2 CCA		SSB.2 CCA	
			Config 3	SSB.2 FR1		SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2,3	Not Applicable		DBT.1		DBT.1	
SMTC configuration			Config 1,2,3	SMTC.1		SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15		30		30	
			Config 2	15		30		30	
			Config 3	30		30		30	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		dBm/ 15kHz	Config 1,2,3	-98		-98		-98	
N_{oc} Note2		dBm/ SCS	Config 1,2	-98		-95		-95	
			Config 3	-95		-95		-95	
SS-RSRP Note 3		dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
			Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2	4	4	4	-3.79	-Infinity	1.54
$\hat{E}_s/N_{oc}$		dB	Config 1,2	4	4	4	4	-Infinity	7
Io Note3		dBm/ ChBW	Config 1,2	-64.59	-64.59	-58.49	-54.64	-58.49	-54.64
		dBm/ ChBW	Config 3	-58.49	-58.49	-58.49	-54.64	-58.49	-54.64

Propagation Condition		Config 1,2,3	AWGN	AWGN	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.				

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_intra_without_index_CCA}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{identify_intra_cca_without_index} = (T_{PSS/SSS_sync_intra_cca} + T_{SSB_measurement_period_intra_cca})$ ms, where

$T_{PSS/SSS_sync_intra_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.1.0.2.1-1.

$T_{SSB_measurement_period_intra_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.1.0.2.2-1.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

13.3.1.4 NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX

13.3.1.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 13.3.1.0.2.1 and 13.3.1.0.2.2.

13.3.1.4.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with an unlicensed carrier, RRM measurements on shared channel access, BWP operation without bandwidth restriction and long DRX cycle.

13.3.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.3.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.3.1.4.

13.3.1.4.4 Test description

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table 13.3.1.4.4.1-1 and 13.3.1.4.4.1-3 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

13.3.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.3.1.4.4.1-1.

Table 13.3.1.4.4.1-1: Supported test configurations for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX

Configuration	Description
13.3.1.4-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.1.4-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.1.4-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 13.3.1.4.4.1-2.

Table 13.3.1.4.4.1-2: Initial conditions for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.3.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 13.3.1.4.4.1-3.
2. Message contents are defined in clause 13.3.1.4.4.3.
3. There are two NR carriers and three cells specified in the test. Cell 1 is the serving cell (PCell) on one NR carrier and Cell2, Cell 3 belong to another NR carrier subject to CCA. Cell 2 is the SCell and Cell 3 is it's intra-frequency neighbor cell. The power levels and settings for Cell 1, Cell 2 and Cell 3 are set according to Annex C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 13.3.1.4.4.1-3: General test parameters for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX

Parameter	Unit	Test Configuration	Value		Comment
			Test 1	Test 2	
Active PCell		1, 2, 3	Cell 1		
Active SCell		1, 2, 3	Cell 2		
Neighbour cell		1, 2, 3	Cell 3		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3		
Measurement gap type		1, 2, 3	Per-UE gaps		
Measurement gap repitition periodicity	ms	1, 2, 3	40		
Measurement gap length	ms	1, 2, 3	6		
Measurement gap offset	ms	1, 2, 3	39		
DL CCA model			As specified in clause D.7.2.1		
UL CCA model			As specified in clause D.7.2.2		
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: DBT.1		
CSI-RS parameters in Cell 1		1	CSI-RS.1.2 FDD resource #0		

		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3	-4.5		
Event A3 measurement quantity			SS-RSRP		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used
DRX		1, 2, 3	DRX.1	DRX.2	
Time offset between Cell 1 and Cell 2		1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 µs		Synchronous cells
		3	3 µs		Synchronous cells
deriveSSB-IndexFromCell		1	*False*		
		2	*True*		
		3	*True*		
T1	s	1, 2, 3	5		
T2	s	1, 2, 3	5	20	

13.3.1.4.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

There are two BWPs configured in Cell 1, BWP0 which contains the cell defining SSB, and BWP1 which does not contain any SSB of Cell 1. During the whole test, BWP1 is always scheduled as the active BWP for the UE.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle. In Test 2 when DRX = 640 ms is used, the uplink time alignment is not maintained and the UE needs to use RACH to obtain uplink allocation for measurement reporting.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE.

2. Set the parameters according to T1 in Table 13.3.1.4.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured with the corresponding offset according to Table 13.3.1.4.4.1-3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 13.3.1.4.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 13.3.1.4.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delay measured from the beginning of time period T2 is less than 1442 ms for Test 1 or less than 10242 ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection.

   OR

   - switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1). Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE (if the paging fails, switches off and on the UE),
     OR:

   - if the device has been switched off, switches on the UE.

10. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11. Repeat step 1-10 for each sub-test in Tables 13.3.1.4.4.1-3 and 13.3.1.4.5-1 as appropriate.

13.3.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.3.1.4.4.3-1: Common Exception messages for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 for configuration 13.3.1.4-1 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 and synchronous cells for configurations 13.3.1.4-2 and 13.3.1.4-3 Table H.3.1-4 with A3-offset set as per Table 13.3.1.4.4.1-3 and SSB Index Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 with gap offset 39 Table H.3.1-7 with Condition INTRA-FREQ and SSB Index Table H.3.7-1 with Condition DRX.1 (Test 1) and DRX.2 (Test 2) Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 13.3.1.4.4.3-2: *ServingCellConfig* for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.1 configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP1)	BWP1
defaultDownlinkBWP-Id	0	Initial BWP (BWP0)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.1 configuration	
}			

firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP1)	BWP1
}			
}			

13.3.1.4.5 Test requirements

Tables 13.3.1.4.4.1-3 and 13.3.1.4.5-1 define the primary level settings including test tolerances for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX.

Table 13.3.1.4.5-1: Cell specific test parameters for NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		2	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2,3	Not Applicable		12		12	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		DLBWP.0.1			
	Initial UL BWP			ULBWP.0.1		ULBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1		DLBWP.1.1			
	Dedicated UL BWP			ULBWP.1.1		ULBWP.1.1			
TRS configuration			Config 1	TRS.1.1 FDD		TRS.1.2 TDD			
			Config 2	TRS.1.1 TDD		TRS.1.2 TDD			
			Config 3	TRS.1.2 TDD		TRS.1.2 TDD			

OCNG Pattern			Config 1,2,3	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		SR.1.1 CCA			
			Config 2	SR.1.1 TDD		SR.1.1 CCA			
			Config 3	SR2.1 TDD		SR.1.1 CCA			
CORESET Reference Channel			Config 1	CR.1.1 FDD		CR.1.1 CCA			
			Config 2	CR.1.1 TDD		CR.1.1 CCA			
			Config 3	CR2.1 TDD		CR.1.1 CCA			
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1		SSB.1 CCA		SSB.1 CCA	
			Config 2	SSB.1 FR1		SSB.1 CCA		SSB.1 CCA	
			Config 3	SSB.2 FR1		SSB.1 CCA		SSB.1 CCA	
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1		SSB.2 CCA		SSB.2 CCA	
			Config 2	SSB.1 FR1		SSB.2 CCA		SSB.2 CCA	
			Config 3	SSB.2 FR1		SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2,3	Not Applicable		DBT.1		DBT.1	
SMTC configuration			Config 1,2,3	SMTC.1		SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15		30		30	
			Config 2	15		30		30	
			Config 3	30		30		30	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		dBm/ 15kHz	Config 1,2,3	-98		-98		-98	
N_{oc} Note2		dBm/ SCS	Config 1,2	-98		-95		-95	
			Config 3	-95		-95		-95	
SS-RSRP Note 3		dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
			Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2	4	4	4	-3.79	-Infinity	1.54
$\hat{E}_s/N_{oc}$		dB	Config 1,2	4	4	4	4	-Infinity	7
Io Note3		dBm/ ChBW	Config 1,2	-64.59	-64.59	-58.49	-54.64	-58.49	-54.64
		dBm/ ChBW	Config 3	-58.49	-58.49	-58.49	-54.64	-58.49	-54.64

Propagation Condition		Config 1,2,3	AWGN	AWGN	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_intra_without_index_CCA}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{identify_intra_cca_without_index} = (T_{PSS/SSS_sync_intra_cca} + T_{SSB_measurement_period_intra_cca})$ ms, where

$T_{PSS/SSS_sync_intra_cca}$: it is the time period used in PSS/SSS detection given in table 10.4.1.0.2.1-1.

$T_{SSB_measurement_period_intra_cca}$: equal to a measurement period of SSB based measurement given in table 10.4.1.0.2.2-1.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

13.3.2 Inter-frequency measurements

13.3.2.0 Minimum Conformance Requirements

13.3.2.0.1 Minimum conformance requirements for inter-frequency measurements

13.3.2.0.1.1 Inter-frequency cell identification

Same as in clause 10.4.2.0.1.1.

13.3.2.0.1.2 Inter-frequency measurements

Same as in clause 10.4.2.0.1.2.

13.3.2.1 Void

13.3.2.2 Void

13.3.2.3 NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is not used

13.3.2.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements for NR cell with CCA in clauses 13.3.2.0.1.1 and 13.3.2.0.1.2.

13.3.2.3.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with an unlicensed carrier and RRM measurements on shared channel access.

13.3.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.3.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.3.2.3.

13.3.2.3.4 Test description

In this test, there are three cells: NR Cell 1 as PCell in FR1 on NR RF channel 1, NR Cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR Cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables 13.3.2.3.4.1-1, 13.3.2.3.4.1-3 and 13.3.2.3.5-1.

In this test, measurement gap pattern configuration # 0 as defined in Table 13.3.2.3.4.1-3 is provided

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 3.

13.3.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.3.2.3.4.1-1.

Table 13.3.2.3.4.1-1: Supported test configurations for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is not used

Configuration	Description
13.3.2.3-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.2.3-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.2.3-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 13.3.2.3.4.1-2.

Table 13.3.2.3.4.1-2: Initial conditions for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.3.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 13.3.2.3.4.1-3.
2. Message contents are defined in clause 13.3.2.3.4.3.
3. There are three cells specified in the test, each on its carrier. Cell 1 is the serving cell (PCell), Cell2 is the SCell and Cell 3 is an inter-frequency neighbor cell. The power levels and settings for Cell 1, Cell 2 and Cell 3 are set according to Annex C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 13.3.2.3.4.1-3: General test parameters for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is not used

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2, 3	Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA.
Active cells		Config 1,2,3	NR Cell 1 (PCell), NR Cell 2 with CCA (SCell)	NR Cell 1 is on NR RF channel number 1. NR Cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2,3	NR Cell 3 with CCA	NR Cell 3 is on NR RF channel number 3 with CCA.
DL CCA model		Config 1,2,3	As specified in clause D.7.2.1	
UL CCA model		Config 1,2,3	As specified in clause D.7.2.2	
Gap Pattern Id		Config 1,2,3	0	As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1.7	

13.3.2.3.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE.

2. Set the parameters according to T1 in Table 13.3.2.3.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured with the corresponding offset according to Table 13.3.2.3.4.1-3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 13.3.2.3.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 13.3.2.3.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delay measured from the beginning of time period T2 is less than 1602 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection.

OR

- switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1). Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE (if the paging fails, switches off and on the UE),
     OR:

   - if the device has been switched off, switches on the UE.

10. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.7 is achieved.

13.3.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.3.2.3.4.3-1: Common Exception messages for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 for configuration 13.3.2.3-1 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 and synchronous cells for configurations 13.3.2.3-2 and 13.3.2.3-3 Table H.3.1-4 with A3-offset set as per Table 13.3.2.3.4.1-3 Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

13.3.2.3.5 Test requirements

Tables 13.3.2.3.4.1-3 and 13.3.2.3.5-1 define the primary level settings including test tolerances for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is not used.

Table 13.3.2.3.5-1: Cell specific test parameters for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is not used

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	

	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable	P_{CCA_UL}=1	P_{CCA_UL}=1
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable	P_{CCA_UL}=1	P_{CCA_UL}=1
L_{CCA_DL}			Config 1,2,3	Not Applicable	12	12
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	DLBWP.0.1	
	Initial UL BWP			ULBWP.0.1	ULBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	DBT.1	DBT.1
SMTC configuration			Config 1,2,3	SMTC.1	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS		dB	Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS		dB				

EPRE ratio of PBCH to PBCH DMRS	dB							
EPRE ratio of PDCCH DMRS to SSS	dB							
EPRE ratio of PDCCH to PDCCH DMRS	dB							
EPRE ratio of PDSCH DMRS to SSS	dB							
EPRE ratio of PDSCH to PDSCH	dB							
EPRE ratio of OCNG DMRS to SSS(Note 1)	dB							
EPRE ratio of OCNG to OCNG DMRS (Note 1)	dB							
N_{oc} Note2	dBm/ 15kHz	Config 1,2,3	-98		-98		-98	
N_{oc} Note2	dBm/ SCS	Config 1,2	-98		-95		-95	
		Config 3	-95		-95		-95	
SS-RSRP Note 3	dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
Io Note3	dBm/ ChBW	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15
	dBm/ ChBW	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

In this test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in 38.133 [6] Table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in 38.133 [6] Table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

13.3.2.4 NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used

13.3.2.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements for NR cell with CCA in clauses 13.3.2.0.1.1 and 13.3.2.0.1.2.

13.3.2.4.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with an unlicensed carrier and RRM measurements on shared channel access and long DRX cycle.

13.3.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.3.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.3.2.4.

13.3.2.4.4 Test description

In this test, there are three cells: NR Cell 1 as PCell in FR1 on NR RF channel 1, NR Cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR Cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables 13.3.2.4.4.1-1, 13.3.2.4.4.1-3 and 13.3.2.4.5-1.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table 13.3.2.4.4.1-3 is provided

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 3.

13.3.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.3.2.4.4.1-1.

Table 13.3.2.4.4.1-1: Supported test configurations for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used

Configuration	Description
13.3.2.4-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.2.4-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.2.4-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 13.3.2.4.4.1-2.

Table 13.3.2.4.4.1-2: Initial conditions for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.3.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 13.3.2.4.4.1-3.
2. Message contents are defined in clause 13.3.2.4.4.3.
3. There are three cells specified in the test, each on its carrier. Cell 1 is the serving cell (PCell), Cell2 is the SCell and Cell 3 is an inter-frequency neighbor cell. The power levels and settings for Cell 1, Cell 2 and Cell 3 are set according to Annex C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 13.3.2.4.4.1-3: General test parameters for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2, 3		Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA.
Active cells		Config 1,2,3	NR Cell 1 (PCell), NR Cell 2 with CCA (SCell)		NR Cell 1 is on NR RF channel number 1. NR Cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2,3	NR Cell 3 with CCA		NR Cell 3 is on NR RF channel number 3 with CCA.
DL CCA model		Config 1,2,3	As specified in clause D.7.2.1		
UL CCA model		Config 1,2,3	As specified in clause D.7.2.2		
Gap Pattern Id		Config 1,2,3	0		As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used

DRX		Config 1,2,3	DRX.1	DRX.2	As specified in clause A.5
Time offset between serving and neighbour cells		Config 1,2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	2.5	17	

13.3.2.4.4.2 Test procedure

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE.
2. Set the parameters according to T1 in Table 13.3.2.4.5-1.
3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured with the corresponding offset according to Table 13.3.2.4.4.1-3.
4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 13.3.2.4.5-1. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 13.3.2.4.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delay measured from the beginning of time period T2 is less than 2402 ms for Test 1 or less than 16642 ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.
7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:
   - transmit *RRCRelease* message to release the RRC connection.

   OR

   - switch the UE off.
8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1). Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
9. Depending on the choice in Step 7, the SS:
   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE (if the paging fails, switches off and on the UE),
     OR:
   - if the device has been switched off, switches on the UE.
10. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.7 is achieved.
11. Repeat step 1-10 for each sub-test in Tables 13.3.2.4.4.1-3 and 13.3.2.4.5-1 as appropriate.

13.3.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.3.2.4.4.3-1: Common Exception messages for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 for configuration 13.3.2.4-1 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 and synchronous cells for configurations 13.3.2.4-2 and 13.3.2.4-3 Table H.3.1-4 with A3-offset set as per Table 13.3.2.4.4.1-3 Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 (Test 1) and DRX.2 (Test 2) Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

13.3.2.4.5 Test requirements

Tables 13.3.2.4.5-1, 13.3.2.4.5-2 and 13.3.2.4.5-3 define the primary level settings including test tolerances for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used.

Table 13.3.2.4.5-1: Cell specific test parameters for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2,3	Not Applicable		5		5	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	

BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	DLBWP.0.1	
	Initial UL BWP			ULBWP.0.1	ULBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	DBT.1	DBT.1
SMTC configuration			Config 1,2,3	SMTC.1	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS		dB	Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS		dB				
EPRE ratio of PBCH to PBCH DMRS		dB				
EPRE ratio of PDCCH DMRS to SSS		dB				
EPRE ratio of PDCCH to PDCCH DMRS		dB				
EPRE ratio of PDSCH DMRS to SSS		dB				
EPRE ratio of PDSCH to PDSCH		dB				
EPRE ratio of OCNG DMRS to SSS(Note 1)		dB				
EPRE ratio of OCNG to OCNG DMRS (Note 1)		dB				

N_{oc} Note2	dBm/ 15kHz	Config 1,2,3	-98		-98		-98	
N_{oc} Note2	dBm/ SCS	Config 1,2	-98		-95		-95	
		Config 3	-95		-95		-95	
SS-RSRP Note 3	dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
Io Note3	dBm/ ChBW	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15
	dBm/ ChBW	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table 13.3.2.4.5-2: DRX-Configuration for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [13]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	ms640	
shortDRX	disable	disable	

Table 13.3.2.4.5-3: *TimeAlignmentTimer* Configuration for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [13]

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in 38.133 [6] Table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in 38.133 [6] Table 9.3A.5-1.

MGRP = 40 ms.

For test 1 DRX cycle = 40 ms and for test 2 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

13.3.2.5 NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is not used

13.3.2.5.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements for NR cell with CCA in clauses 13.3.2.0.1.1 and 13.3.2.0.1.2.

13.3.2.5.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with an unlicensed carrier and RRM measurements on shared channel access.

13.3.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.3.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.3.2.5.

13.3.2.5.4 Test description

In this test, there are three cells: NR Cell 1 as PCell in FR1 on NR RF channel 1, NR Cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR Cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables 13.3.2.5.4.1-1, 13.3.2.5.4.1-3 and 13.3.2.5.5-1.

In this test, measurement gap pattern configuration # 0 as defined in Table 13.3.2.5.4.1-3 is provided

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 3.

13.3.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.3.2.5.4.1-1.

Table 13.3.2.5.4.1-1: Supported test configurations for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is not used

Configuration	Description
13.3.2.5-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.2.5-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.2.5-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

NOTE: The UE is only required to be tested in one of the supported test configurations.

Configure the test equipment and the DUT according to the parameters in Table 13.3.2.5.4.1-2.

Table 13.3.2.5.4.1-2: Initial conditions for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.3.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 13.3.2.5.4.1-3.
2. Message contents are defined in clause 13.3.2.5.4.3.
3. There are three cells specified in the test, each on its carrier. Cell 1 is the serving cell (PCell), Cell2 is the SCell and Cell 3 is an inter-frequency neighbor cell. The power levels and settings for Cell 1, Cell 2 and Cell 3 are set according to Annex C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 13.3.2.5.4.1-3: General test parameters for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is not used

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2, 3	Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA
Active cells		Config 1,2,3	NR Cell 1 (PCell), NR Cell 2 with CCA (SCell)	NR Cell 1 is on NR RF channel number 1. NR Cell 2 is on NR RF channel number 2 with CCA
Neighbour cell		Config 1,2,3	NR Cell 3 with CCA	NR Cell 3 is on NR RF channel number 3 with CCA
DL CCA model		Config 1,2,3	As specified in clause D.7.2.1	
UL CCA model		Config 1,2,3	As specified in clause D.7.2.2	
Gap Pattern Id		Config 1,2,3	0	As specified in 38.133 [6] clause 9.1.2-1
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3μs	Synchronous cells
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	2	

13.3.2.5.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE.

2. Set the parameters according to T1 in Table 13.3.2.5.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured with the corresponding offset according to Table 13.3.2.5.4.1-3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 13.3.2.5.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 13.3.2.5.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delay measured from the beginning of time period T2 is less than 1922 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection.

   OR

   - switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1). Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE (if the paging fails, switches off and on the UE),
     OR:

   - if the device has been switched off, switches on the UE.

10. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.7 is achieved.

13.3.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.3.2.5.4.3-1: Common Exception messages for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 for configuration 13.3.2.5-1 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 and synchronous cells for configurations 13.3.2.5-2 and 13.3.2.5-3 Table H.3.1-4 with A3-offset set as per Table 13.3.2.5.4.1-3 with Condition SSB Index Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ and SSB Index Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

13.3.2.5.5 Test requirements

Tables 13.3.2.5.4.1-3 and 13.3.2.5.5-1 define the primary level settings including test tolerances for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is not used.

Table 13.3.2.5.5-1: Cell specific test parameters for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is not used

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_DL}=0.9375		P_{CCA_DL}=0.9375	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		P_{CCA_UL}=1		P_{CCA_UL}=1	
L_{CCA_DL}			Config 1,2,3	Not Applicable		5		5	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
			Config 3	40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		DLBWP.0.1			
	Initial UL BWP			ULBWP.0.1		ULBWP.0.1			

	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	DBT.1	DBT.1
SMTC configuration			Config 1,2,3	SMTC.1	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS		dB	Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS		dB				
EPRE ratio of PBCH to PBCH DMRS		dB				
EPRE ratio of PDCCH DMRS to SSS		dB				
EPRE ratio of PDCCH to PDCCH DMRS		dB				
EPRE ratio of PDSCH DMRS to SSS		dB				
EPRE ratio of PDSCH to PDSCH		dB				
EPRE ratio of OCNG DMRS to SSS(Note 1)		dB				
EPRE ratio of OCNG to OCNG DMRS (Note 1)		dB				
N_{oc} Note2		dBm/15kHz	Config 1,2,3	-98	-98	-98
			Config 1,2	-98	-95	-95

N_{oc} Note2	dBm/ SCS	Config 3	-95		-95		-95	
SS-RSRP Note 3	dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
Io Note3	dBm/ ChBW	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15
	dBm/ ChBW	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In this test UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in 38.133 [6] Table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in 38.133 [6] Table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in 38.133 [6] Table 9.3A.5-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

13.3.2.6 NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used

13.3.2.6.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements for NR cell with CCA in clauses 13.3.2.0.1.1 and 13.3.2.0.1.2.

13.3.2.6.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with an unlicensed carrier and RRM measurements on shared channel access and long DRX cycle.

13.3.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.3.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.3.2.6.

13.3.2.6.4 Test description

In this test, there are three cells: NR Cell 1 as PCell in FR1 on NR RF channel 1, NR Cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR Cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables 13.3.2.6.4.1-1, 13.3.2.6.4.1-3 and 13.3.2.6.5-1.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table 13.3.2.6.4.1-3 is provided

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 3.

13.3.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.3.2.6.4.1-1.

Table 13.3.2.6.4.1-1: Supported test configurations for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used

Configuration	Description
13.3.2.6-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.2.6-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.2.6-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 13.3.2.6.4.1-2.

Table 13.3.2.6.4.1-2: Initial conditions for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.3.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part		

1. The general test parameter settings are set up according to Table 13.3.2.6.4.1-3.
2. Message contents are defined in clause 13.3.2.6.4.3.
3. There are three cells specified in the test, each on its carrier. Cell 1 is the serving cell (PCell), Cell2 is the SCell and Cell 3 is an inter-frequency neighbor cell. The power levels and settings for Cell 1, Cell 2 and Cell 3 are set according to Annex C.1.2 and C.1.3 for this test. Cell 3 is switched off during the initial connection setup.

Table 13.3.2.6.4.1-3: General test parameters for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2, 3		Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA
Active cells		Config 1,2,3	NR Cell 1 (PCell), NR Cell 2 with CCA (SCell)		NR Cell 1 is on NR RF channel number 1. NR Cell 2 is on NR RF channel number 2 with CCA
Neighbour cell		Config 1,2,3	NR Cell 3 with CCA		NR Cell 3 is on NR RF channel number 3 with CCA
DL CCA model		Config 1,2,3	As specified in clause D.7.2.1		
UL CCA model		Config 1,2,3	As specified in clause D.7.2.2		
Gap Pattern Id		Config 1,2,3	0		As specified in 38.133 [6] clause 9.1.2-1
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.2	As specified in clause A.5
Time offset between serving and neighbour cells		Config 1,2,3	3μs		Synchronous cells
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	3	20	

13.3.2.6.4.2 Test procedure

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Both Cell 1 (PCell) and Cell 2 (SCell) are configured on the UE.

2. Set the parameters according to T1 in Table 13.3.2.6.5-1.

3. SS shall transmit an *RRCConnectionReconfiguration* message with event A3 configured with the corresponding offset according to Table 13.3.2.6.4.1-3.

4. The UE shall transmit *RRCConnectionReconfigurationComplete* message. The SS shall enable DL and UL CCA model according to Table 13.3.2.6.5-1. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 13.3.2.6.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delay measured from the beginning of time period T2 is less than 2882 ms for Test 1 or less than 19842 ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the required measurement delay, then the number of failure tests is increased by one.

7. After the SS receive the *MeasurementReport* message in step 6) or when T2 expires, the SS shall:

- transmit *RRCRelease* message to release the RRC connection.

OR

- switch the UE off.

8. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1). Set Cell 3 physical cell identity = ((current cell 3 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Depending on the choice in Step 7, the SS:

   - if the RRC Connection Release has been sent, transmits in Cell 1 a *Paging* message (including PagingRecord with ue-Identity) for the UE (if the paging fails, switches off and on the UE),
     OR:

   - if the device has been switched off, switches on the UE.

10. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.7 is achieved.

11. Repeat step 1-10 for each sub-test in Tables 13.3.2.6.4.1-3 and 13.3.2.6.5-1 as appropriate.

13.3.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.3.2.6.4.3-1: Common Exception messages for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 for configuration 13.3.2.6-1 Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 CCA for semi-static channel access or SSB.2 CCA for dynamic channel access, SMTC.1 and synchronous cells for configurations 13.3.2.6-2 and 13.3.2.6-3 Table H.3.1-4 with A3-offset set as per Table 13.3.2.6.4.1-3 and SSB Index Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ and SSB Index Table H.3.7-1 with Condition DRX.1 (Test 1) and DRX.2 (Test 2) Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

13.3.2.6.5 Test requirements

Tables 13.3.2.6.5-1, 13.3.2.6.5-2 and 13.3.2.6.5-3 define the primary level settings including test tolerances for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used.

Table 13.3.2.6.5-1: Cell specific test parameters for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2		3	
Duplex mode		Config 1	FDD		TDD		TDD	
		Config 2,3	TDD		TDD		TDD	
TDD configuration		Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
		Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	

			Config 3	TDDConf.2.1	TDDConf.1.1 CCA	TDDConf.1.1 CCA
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable	P_{CCA_DL}=0.9375	P_{CCA_DL}=0.9375
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable	P_{CCA_UL}=1	P_{CCA_UL}=1
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable	P_{CCA_UL}=1	P_{CCA_UL}=1
L_{CCA_DL}			Config 1,2,3	Not Applicable	2	2
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
			Config 3	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	DLBWP.0.1	
	Initial UL BWP			ULBWP.0.1	ULBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	DBT.1	DBT.1
SMTC configuration			Config 1,2,3	SMTC.1	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30

		Config 3	30		30		30	
EPRE ratio of PSS to SSS	dB	Config 1,2,3	0		0		0	
EPRE ratio of PBCH DMRS to SSS	dB							
EPRE ratio of PBCH to PBCH DMRS	dB							
EPRE ratio of PDCCH DMRS to SSS	dB							
EPRE ratio of PDCCH to PDCCH DMRS	dB							
EPRE ratio of PDSCH DMRS to SSS	dB							
EPRE ratio of PDSCH to PDSCH	dB							
EPRE ratio of OCNG DMRS to SSS(Note 1)	dB							
EPRE ratio of OCNG to OCNG DMRS (Note 1)	dB							
N_{oc} Note2	dBm/ 15kHz	Config 1,2,3	-98		-98		-98	
N_{oc} Note2	dBm/ SCS	Config 1,2	-98		-95		-95	
		Config 3	-95		-95		-95	
SS-RSRP Note 3	dBm/ SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
Io Note3	dBm/ ChBW	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15
	dBm/ ChBW	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table 13.3.2.6.5-2: DRX-Configuration for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	

drx-InactivityTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [13]
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	ms640	
shortDRX	disable	disable	

Table 13.3.2.6.5-3: *TimeAlignmentTimer* Configuration for NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [13]

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in 38.133 [6] Table 9.3A.4-1.

$T_{SSB_time_index_inter_cca}$: it is the time period used to acquire the index of the SSB being measured given in 38.133 [6] Table 9.3A.4-2.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in 38.133 [6] Table 9.3A.5-1.

MGRP = 40 ms.

For test 1 DRX cycle = 40 ms and for test 2 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

13.3.3 L1-RSRP measurement for beam reporting for SCell under CCA

13.3.3.0 Minimum Conformance Requirements

Same as section 10.4.3.0.

13.3.3.1 NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used

13.3.3.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 13.3.3.0.

13.3.3.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier and supporting RRM measurements in shared spectrum.

13.3.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.3.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.3.3.1.

13.3.3.1.4 Test description

There are two cells in the tests, FR1 PCell (Cell 1) and FR1 SCell (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 and Cell 2 are given in Table 13.3.3.1.4.1-3 and Table 13.3.3.1.5-1 below.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

13.3.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.3.3.1.4.1-1.

Table 13.3.3.1.4.1-1: Supported test configurations for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used

Config	Description
13.3.3.1-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.3.1-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.3.1-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 13.3.3.1.4.1-2.

Table 13.3.3.1.4.1-2: Initial conditions for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.3.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The test parameter settings are set up according to Tables 13.3.3.1.5-1 and 13.3.3.1.5-2.
2. Message contents are defined in clause 13.3.3.1.4.3.
3. Cell 1 and Cell 2 are NR cells with power levels set according to clauses C.1.2 and C.1.3. In addition, Cell 2 is on an unlicensed carrier subject to CCA.

Table 13.3.3.1.4.1-3: General test parameters for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used

Parameter	Config	Unit	Value	
			Cell 1	Cell 2
Active PCell/SCell Configuration			PCell	SCell
RF Channel Number			1	2
DL CCA model	1~3		N/A	As specified in D.7.2.1
UL CCA model	1~3		N/A	As specified in D.7.2.2
Duplex mode	1		FDD	TDD
	2		TDD	
	3		TDD	
TDD Configuration	1		N/A	TDDConf.1.1 CCA
	2		TDDConf.1.1	
	3		TDDConf.2.1	
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106
	2		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106	
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 CCA
	2		SR.1.1 TDD	
	3		SR.2.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 CCA
	2		CR.1.1 TDD	
	3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 CCA
	2		CCR.1.1 TDD	
	3		CCR.2.1 TDD	
SSB configuration	1		SSB.3 FR1	SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
	2		SSB.3 FR1	
	3		SSB.4 FR1	
OCNG Patterns	1~3		OP.1	OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1	N/A
DBT Window Configuration	1~3		N/A	DBT.1
TRS Configuration	1		TRS.1.1 FDD	TRS.1.2 TDD
	2		TRS.1.1 TDD	
	3		TRS.1.2 TDD	
DRX configuration	1~3		Off	Off
reportConfigType	1~3		periodic	periodic
reportQuantity	1~3		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~3		2	2
L1-RSRP reporting period	1~3	slot	80	80
T1	1~3	s	5	5
T2	1~3	s	1	1
EPRE ratio of PSS to SSS	1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				

EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1~3		AWGN	AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				

13.3.3.1.4.2 Test procedure

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

Prior to the start of the time duration T1, the UE shall be fully synchronized to SCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above Table 13.3.3.1.4.1-3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. The SS shall transmit an *RRCReconfiguration* message on Cell 1 adding Cell 2 as SCell as specified in section 13.3.3.1.4.3.
3. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration.
4. Set the parameters according to T1 in Table 13.3.3.1.5-1. The SS shall enable DL and UL CCA model according to Table 13.3.3.1.5-1. T1 starts.
5. The UE shall be transmitting CSI on PUCCH with a periodicity of 80 slots.
6. When T1 expires, the SS shall set the parameters according to T2 in 13.3.3.1.5-1. T2 starts.
7. The UE shall start sending L1-RSRP reports for the SCell. The SS shall check following requirements:

   R1: the UE shall start to transmit valid reports no later than 722 ms from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 (Table 13.3.3.1.5-2) and the relative L1-RSRP requirement for SSB#0 (Table 13.3.3.1.5-3). If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 13.3.3.1.5-2 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   R4: The DIFF RSRP value of SSB#0 reported by the UE is compared to the expected DIFF RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 13.3.3.1.5-3 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

8. The SS waits until T2 expires.
9. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
10. The SS shall switch off and then on the UE. Then proceed with step 11.
11. Repeat steps 1-10 until the confidence level according to Annex G clause G.2.7 is achieved.

13.3.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.3.3.1.4.3-1: Common Exception messages for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 13.3.3.1.4.3-2: *RadioLinkMonitoringConfig* for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

13.3.3.1.5 Test requirements

Tables 13.3.3.1.5-1, 13.3.3.1.5-2 and 13.3.3.1.5-3 define the primary level settings including test tolerances for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used.

Table 13.3.3.1.5-1: Cell specific test parameters for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1,2,3		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1,2,3		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75

UL CCA probability P_{CCA_UL}	1,2,3		1.0	1.0	1.0	1.0
N_{oc} Note2	1,2,3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,3	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1,2,3	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1,2,3	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.15
Io Note3	1,2,3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1,2,3	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5: The signal levels apply for SSS Res when the discovery burst is transmitted during DBT windows.
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in Table 13.3.3.1.5-2 and relative accuracy requirement in Table 13.3.3.1.5-3. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

Table 13.3.3.1.5-2: L1-RSRP absolute accuracy requirements for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 13.3.3.1.5-3: L1-RSRP relative accuracy requirements for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

13.3.3.2 NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used

13.3.3.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 13.3.3.0.

13.3.3.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier and supporting RRM measurements in shared spectrum and long DRX cycle.

13.3.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.3.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.3.3.2.

13.3.3.2.4 Test description

There are two cells in the tests, FR1 PCell (Cell 1) and FR1 SCell (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 and Cell 2 are given in Table 13.3.3.2.4.1-3 and Table 13.3.3.2.5-1 below.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

13.3.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.3.3.2.4.1-1.

Table 13.3.3.2.4.1-1: Supported test configurations for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used

Config	Description
13.3.3.2-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.3.2-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.3.3.2-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 13.3.3.2.4.1-2.

Table 13.3.3.2.4.1-2: Initial conditions for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.3.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The test parameter settings are set up according to Tables 13.3.3.2.5-1 and 13.3.3.2.5-2.
2. Message contents are defined in clause 13.3.3.2.4.3.

3. Cell 1 and Cell 2 are NR cells with power levels set according to clauses C.1.2 and C.1.3. In addition, Cell 2 is on an unlicensed carrier subject to CCA.

Table 13.3.3.2.4.1-3: General test parameters for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used

Parameter	Config	Unit	Value	
			Cell 1	Cell 2
Active PCell/SCell Configuration			PCell	SCell
RF Channel Number			1	2
DL CCA model	1~3		N/A	As specified in D.7.2.1
UL CCA model	1~3		N/A	As specified in D.7.2.2
Duplex mode	1		FDD	TDD
	2		TDD	
	3		TDD	
TDD Configuration	1		N/A	TDDConf.1.1 CCA
	2		TDDConf.1.1	
	3		TDDConf.2.1	
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106
	2		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106	
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 CCA
	2		SR.1.1 TDD	
	3		SR.2.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 CCA
	2		CR.1.1 TDD	
	3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 CCA
	2		CCR.1.1 TDD	
	3		CCR.2.1 TDD	
SSB configuration	1		SSB.3 FR1	SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
	2		SSB.3 FR1	
	3		SSB.4 FR1	
OCNG Patterns	1~3		OP.1	OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1	N/A
DBT Window Configuration	1~3		N/A	DBT.1
TRS Configuration	1		TRS.1.1 FDD	TRS.1.2 TDD
	2		TRS.1.1 TDD	
	3		TRS.1.2 TDD	
DRX configuration	1~3		DRX.3	DRX.3
reportConfigType	1~3		periodic	periodic
reportQuantity	1~3		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~3		2	2
L1-RSRP reporting period	1~3	slot	80	80
T1	1~3	s	5	5
T2	1~3	s	1	1
EPRE ratio of PSS to SSS	1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				

EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition	1~3		AWGN	AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				

13.3.3.2.4.2 Test procedure

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs. The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test.

Prior to the start of the time duration T1, the UE shall be fully synchronized to SCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above Table 13.3.3.2.4.1-3.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. The SS shall transmit an *RRCReconfiguration* message on Cell 1 adding Cell 2 as SCell as specified in section 13.3.3.2.4.3.
3. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration.
4. Set the parameters according to T1 in Table 13.3.3.2.5-1. The SS shall enable DL and UL CCA model according to Table 13.3.3.2.5-1. T1 starts.
5. The UE shall be transmitting CSI on PUCCH with a periodicity of 80 slots.
6. When T1 expires, the SS shall set the parameters according to T2 in 13.3.3.2.5-1. T2 starts.
7. The UE shall start sending L1-RSRP reports for the SCell. The SS shall check following requirements:

   R1: the UE shall start to transmit valid reports no later than 722 ms from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 (Table 13.3.3.2.5-2) and the relative L1-RSRP requirement for SSB#0 (Table 13.3.3.2.5-3). If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 13.3.3.2.5-2 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   R4: The DIFF RSRP value of SSB#0 reported by the UE is compared to the expected DIFF RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in

Table 13.3.3.2.5-3 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

8. The SS waits until T2 expires.
9. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources. The SS shall disable the CCA model (both DL and UL, i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1).
10. The SS shall switch off and then on the UE. Then proceed with step 11.
11. Repeat steps 1-10 until the confidence level according to Annex G clause G.2.7 is achieved.

13.3.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.3.3.2.4.3-1: Common Exception messages for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10 Table H.3.7-1 with condition DRX.3 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 13.3.3.2.4.3-2: *RadioLinkMonitoringConfig* for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

13.3.3.2.5 Test requirements

Tables 13.3.3.2.5-1, 13.3.3.2.5-2 and 13.3.3.2.5-3 define the primary level settings including test tolerances for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used.

Table 13.3.3.2.5-1: Cell specific test parameters for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2

DL CCA Probability P_{CCA_DL} Note 4,6	1,2,3		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1,2,3		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1,2,3		1.0	1.0	1.0	1.0
N_{oc} Note2	1,2,3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,3	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1,2,3	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1,2,3	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.15
Io Note3	1,2,3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.49
$\hat{E}_s / N_{oc}$	1,2,3	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

Note 5: The signal levels apply for SSS Res when the discovery burst is transmitted during DBT windows.

Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in Table 13.3.3.2.5-2 and relative accuracy requirement in Table 13.3.3.2.5-3. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

Table 13.3.3.2.5-2: L1-RSRP absolute accuracy requirements for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	-	58
Highest reported value (SSB#1)	-	78

Table 13.3.3.2.5-3: L1-RSRP relative accuracy requirements for NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	-	0
Highest DIFF RSRP reported (SSB#0)	-	3

For the test to pass, the ratio of successful reported values for each requirement (R1 to R4) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

13.4 Measurement Peformance

13.4.1 SS-RSRP

13.4.1.0 Minimum Conformance Requirements

13.4.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements under CCA

Same as section 10.5.1.0.1.

13.4.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements under CCA

Same as section 10.5.1.0.2.

13.4.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements under CCA

Same as section 10.5.1.0.3.

13.4.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements under CCA

Same as section 10.5.1.0.4.

13.4.1.1 NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA

13.4.1.1.1 Test purpose

The purpose of this test is to verify that the SS-RSRP measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will partially verify the SS-RSRP measurement accuracy requirements in section 13.4.1.0.1 and 13.4.1.0.2.

13.4.1.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier and supporting RRM.

13.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.4.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.4.1.1.

13.4.1.1.4 Test description

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). Supported test configurations are shown in Table 13.4.1.1.4.1-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements is tested by using the parameters in Tables 13.4.1.1.5-1, 13.4.1.1.5-2 and 13.4.1.1.5-3.

13.4.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.4.1.1.4.1-1.

Table 13.4.1.1.4.1-1: Supported test configurations for NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA

Config	Description
13.4.1.1-1	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
13.4.1.1-2	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
13.4.1.1-3	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 13.4.1.1.4.1-2.

Table 13.4.1.1.4.1-2: Initial conditions for NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The test parameter settings are set up according to Tables 13.4.1.1.5-1 and 13.4.1.1.5-2.
2. Message contents are defined in clause 13.4.1.1.4.3.
3. Cell 1, Cell 2 and Cell 3 are NR cells with power levels set according to clauses C.1.2 and C.1.3. In addition, Cell 2 and Cell 3 are on an unlicensed carrier subject to CCA.

13.4.1.1.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 13.4.1.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 adding Cell 2 as SCell as specified in section 13.4.1.1.4.3.
4. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration.
5. The SS shall transmit an *RRCReconfiguration* on Cell 1 configuring the UE to perform intra-frequency SS-RSRP measurements on the SCC as specified in section 13.4.1.1.4.3.
6. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 13.4.1.1.5-1.
7. The UE shall transmit periodical *MeasurementReport* messages.

8. After 10s wait from Step 5, the SS shall check the SS-RSRP reported values in the periodic *MeasurementReport*. The SS-RSRP value of Cell 3 reported by the UE is compared to the expected SS-RSRP. If the value is outside the limits in Tables 13.4.1.1.5-2 and 13.4.1.1.5-3 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

9. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

10. Repeat steps 1-9 for each Test in Table 13.4.1.1.5-1 as appropriate.

13.4.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.4.1.1.4.3-1: Common Exception messages for NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessTable H.3.10-2 with Condition SMTC.1 CCA

Table 13.4.1.1.4.3-2: *ReportConfigNR* for NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

13.4.1.1.5 Test requirements

Tables 13.4.1.1.5-1, 13.4.1.1.5-2 and 13.4.1.1.5-3 define the primary level settings including test tolerances for all tests for NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA.

Table 13.4.1.1.5-1: Cell specific test parameters for NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Cell ID		489	0	489	0	489	0
SSB ARFCN		freq1		freq1		freq1	
DL CCA model		As specified in clause D.7.2.1					
UL CCA model		As specified in clause D.7.2.2					
P_{CCA_DL} for dynamic channel access Note 7,9		$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75					

P_{CCA_DL} for semi-static channel access Note 8,9				P_{CCA_DL}=0.9375					
P_{CCA_UL}				1					
TDD configuration		Config 1,2,3		TDDConf.1.1 CCA					
$BW_{channel}$		Config 1,2,3	MHz	40: $N_{RB,c}$ = 106					
BWP BW		Config 1,2,3		40: $N_{RB,c}$ = 106					
Downlink initial BWP configuration				DLBWP.0.1					
Downlink dedicated BWP configuration				DLBWP.1.1					
Uplink initial BWP configuration				ULBWP.0.1					
Uplink dedicated BWP configuration				ULBWP.1.1					
TRS configuration		Config 1,2,3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel		Config 1,2,3		SR.1.1 CCA	-	SR.1.1 CCA	-	SR.1.1 CCA	-
RMSI CORESET Reference Channel		Config 1,2,3		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
Control channel RMC		Config 1,2,3		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
SSB configuration for semi-static channel access		Config 1,2,3		SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA
SSB configuration for dynamic channel access		Config 1,2,3		SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA
DBT window configuration		Config 1,2,3		DBT.1	DBT.1	DBT.1	DBT.1	DBT.1	DBT.1
Time offset with Cell 1		Config 1,2,3	µs	-	3	-	3	-	3
SMTC configuration		Config 1,2,3		SMTC.1					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing		Config 1,2,3	kHz	30 kHz					
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)			dB	0	0	0	0	0	0
N_{oc} Note2	Config 1,2,3	NR_CCA_FR1_I		Not applicable Note 5		-94		-111	
		NR_CCA_FR1_J						-111	
N_{oc} Note2	Config 1,2,3	NR_CCA_FR1_I	dBm/SCS	Not applicable Note 5		-91		-108	
		NR_CCA_FR1_J						-108	
$\hat{E}_s/I_{ot}$ Note6			dB	Not applicable Note 5	Not applicable Note 5	2.23	-5.57	-2.11	-3.34
$\hat{E}_s/N_{oc}$ Note6			dB	Not applicable Note 5	Not applicable Note 5	6	1.4	1	0.2
SS-RSRP Note3,6	Config 1,2,3	NR_TDD_FR1_I	dBm/SCS	Not applicable Note 5	Not applicable Note 5	-85	-89.6	-107	-107.8
								-107	-107.8
Io Note3	Config 1,2,3	NR_CCA_FR1_I	dBm/ 38.16MHz	Not applicable Note 5-		-51.91		-71.75	
		NR_CCA_FR1_J						-71.75	
Propagation condition			-	AWGN					
Antenna configuration				1x2					
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.									

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 5: Subtest 1 is not used when testing with 30kHz SSB SCS.
NOTE 6: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
NOTE 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 9: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 13.4.1.1.5-2: Absolute accuracy requirements for the reported values for NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA

Normal Conditions	Test 2 All bands	Test 3	
Lowest SS-RSRP reported value (cell 3)	57	Bands NR_CCA_FR1_I	43
		Bands NR_CCA_FR1_J	43
Highest SS-RSRP reported value (cell 3)	76	Bands NR_CCA_FR1_I	55
		Bands NR_CCA_FR1_J	55
Extreme Conditions	**Test 2 All bands**	**Test 3**	
Lowest SS-RSRP reported value (cell 3)	54	Bands NR_CCA_FR1_I	38
		Bands NR_CCA_FR1_J	38
Highest SS-RSRP reported value (cell 3)	79	Bands NR_CCA_FR1_I	59
		Bands NR_CCA_FR1_J	59

Table 13.4.1.1.5-3: Relative accuracy requirements for the reported values for NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA

	Test 2	Test 3
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	RSRP_x – 8	RSRP_x – 7
Highest reported value (Cell 3)	RSRP_x – 1	RSRP_x + 1
Extreme Conditions		
Lowest reported value (Cell 3)	RSRP_x – 8	RSRP_x – 7
Highest reported value (Cell 3)	RSRP_x - 1	RSRP_x + 1
RSRP_x is the reported value of Cell 2		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

13.4.2 SS-RSRQ

13.4.2.0 Minimum Conformance Requirements

13.4.2.0.1 Intra-frequency absolute SS-RSRQ measurement accuracy requirements under CCA

Same as section 10.5.2.0.1.

13.4.2.0.2 Void

13.4.2.0.3 Inter-frequency absolute SS-RSRQ measurement accuracy requirements under CCA

Same as section 10.5.2.0.3.

13.4.2.0.4 Inter-frequency relative SS-RSRQ measurement accuracy requirements under CCA

Same as section 10.5.2.0.4.

13.4.2.1 NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA

13.4.2.1.1 Test purpose

The purpose of this test is to verify that the SS-RSRQ measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will partially verify the SS-RSRQ measurement accuracy requirements in section 13.4.2.0.1.

13.4.2.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier and supporting RRM in shared spectrum.

13.4.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.4.2.1.

13.4.2.1.4 Test description

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). Supported test configurations are shown in Table 13.4.2.1.4.1-1. The absolute accuracy of SS-RSRQ intra-frequency measurements is tested by using the parameters in Tables 13.4.2.1.5-1 and 13.4.2.1.5-2.

13.4.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.4.2.1.4.1-1.

Table 13.4.2.1.4.1-1: Supported test configurations for NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA

Config	Description
13.4.2.1-1	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
13.4.2.1-2	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
13.4.2.1-3	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 13.4.2.1.4.1-2.

Table 13.4.2.1.4.1-2: Initial conditions for NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.4.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The test parameter settings are set up according to Tables 13.4.2.1.5-1 and 13.4.2.1.5-2.
2. Message contents are defined in clause 13.4.2.1.4.3.
3. Cell 1, Cell 2 and Cell 3 are NR cells with power levels set according to clauses C.1.2 and C.1.3. In addition, Cell 2 and Cell 3 are on an unlicensed carrier subject to CCA.

13.4.2.1.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On,* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 13.4.2.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 adding Cell 2 as SCell as specified in section 13.4.2.1.4.3.
4. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration.
5. The SS shall transmit an *RRCReconfiguration* on Cell 1 configuring the UE to perform intra-frequency SS-RSRQ measurements on the SCC as specified in section 13.4.2.1.4.3.
6. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 13.4.2.1.5-1.
7. The UE shall transmit periodical *MeasurementReport* messages.
8. After 10s wait from Step 5, the SS shall check the SS-RSRQ reported values in the periodic *MeasurementReport*. The SS-RSRQ value of Cell 3 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 13.4.2.1.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
9. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
10. Repeat steps 1-9 for each Test in Table 13.4.2.1.5-1 as appropriate.

13.4.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.4.2.1.4.3-1: Common Exception messages for NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessTable H.3.10-2 with Condition SMTC.1 CCA

Table 13.4.2.1.4.3-2: *ReportConfigNR* for NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	true		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

13.4.2.1.5 Test requirements

Tables 13.4.2.1.5-1 and 13.4.2.1.5-2 define the primary level settings including test tolerances for all tests for NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA.

Table 13.4.2.1.5-1: Cell specific test parameters for NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA

Parameter		**Unit**	**Test 1**		**Test 2**	
			Cell 2	**Cell 3**	**Cell 2**	**Cell 3**
SSB ARFCN			freq2	freq2	freq2	freq2
DL CCA model	Config 1, 2, 3		As specified in clause D.7.2.1			
UL CCA model	Config 1, 2, 3		As specified in clause D.7.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1, 2, 3		TDD			
TDD configuration	Config 1, 2, 3		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1, 2, 3	MHz	40: $N_{RB,c}$ = 106			
Gap Pattern ID			0			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1, 2, 3		SR1.1 CCA		SR1.1 CCA	
RMSI CORESET Reference Channel	Config 1, 2, 3		CR.1.1 CCA		CR.1.1 CCA	

Control Channel RMC		Config 1, 2, 3		CCR.1.1 CCA		CCR.1.1 CCA	
TRS Configuration		Config 1, 2, 3		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OP. 1			
SS-RSSI-Measurement				Not Applicable			
Time offset with Cell 1		Config 1, 2, 3	µs	3	3	3	3
DBT Window configuration		Config 1, 2, 3		DBT.1			
SSB configuration		Config 1, 2, 3		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration		Config 1, 2, 3		SMTC.1			
CSI-RS for tracking		Config 1, 2, 3		TRS.1.2 TDD			
PDSCH/PDCCH subcarrier spacing		Config 1, 2, 3	kHz	30 kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-92.6		-110	
		NR_CCA_FR1_J				-109.5	
N_{oc} Note2	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-89.6		-107	
		NR_CCA_FR1_J				-106.5	
$\hat{E}_s/I_{ot}$			dB	-1.76		-5.46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-4	-4
SS-RSRP Note 3	Config 1, 2, 3	NR_CCA_FR1_I		-86.59	-86.59	-110.99	-110.99
		NR_CCA_FR1_J				-110.49	-110.49
SS-RSRQ Note3		NR_CCA_FR1_I	dB	-14.77	-14.77	-17.34	-17.34
		NR_CCA_FR1_J					
Io Note3	Config 1, 2, 3	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.56		-73.4	
		NR_CCA_FR1_J				-72.9	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3A.4.1.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.

Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 13.4.2.1.5-2: NR PCell specific test parameters for NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA

Parameter			Unit	Test 1	Test 2
				Cell 1	Cell 1
SSB ARFCN				freq1	freq1
Duplex mode		Config 1		FDD	FDD
		Config 2,3		TDD	TDD
TDD configuration		Config 1		Not Applicable	Not Applicable
		Config 2		TDDConf.1.1	TDDConf.1.1
		Config 3		TDDConf.2.1	TDDConf.2.1
$BW_{channel}$		Config 1	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
		Config 2		10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
		Config 3		40: $N_{RB,c}$ = 106	40: $N_{RB,c}$ = 106
Gap Pattern ID				0	0
Downlink initial BWP configuration				DLBWP.0.1	DLBWP.0.1
Downlink dedicated BWP configuration				DLBWP.1.1	DLBWP.1.1
Uplink initial BWP configuration				ULBWP.0.1	ULBWP.0.1
Uplink dedicated BWP configuration				ULBWP.1.1	ULBWP.1.1
DRX Cycle configuration			ms	Not Applicable	Not Applicable
TRS configuration		Config 1		TRS.1.1 FDD	TRS.1.1 FDD
		Config 2		TRS.1.1 TDD	TRS.1.1 TDD
		Config 3		TRS.1.2 TDD	TRS.1.2 TDD
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD	SR.1.1 FDD
		Config 2		SR.1.1 TDD	SR.1.1 TDD
		Config 3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD	CR.1.1 FDD
		Config 2		CR.1.1 TDD	CR.1.1 TDD
		Config 3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD	CCR.1.1 FDD
		Config 2		CCR.1.1 TDD	CCR.1.1 TDD
		Config 3		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns				OP.1	OP.1
SS-RSSI-Measurement				Not Applicable	Not Applicable
SMTC configuration		Config 1 Config 2,3		SMTC.2	SMTC.2
				SMTC.1	SMTC.1
SSB configuration		Config 1,2		SSB.1 FR1	SSB.1 FR1
		Config 3		SSB.2 FR1	SSB.2 FR1
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15	15
		Config 3		30	30
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	Config 1, 2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-85	-114

		NR_FDD_FR1_B			-113.5
		NR_TDD_FR1_C			-113
		NR_FDD_FR1_D, NR_TDD_FR1_D			-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-112
		NR_FDD_FR1_F			-111.5
		NR_FDD_FR1_G			-111
		NR_FDD_FR1_H			-110.5
		NR_FDD_FR1_N			-107.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91	-114
		NR_FDD_FR1_B			-113.5
		NR_TDD_FR1_C			-113
		NR_FDD_FR1_D, NR_TDD_FR1_D			-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-112
		NR_FDD_FR1_F			-111.5
		NR_FDD_FR1_G			-111
		NR_FDD_FR1_H			-110.5
		NR_FDD_FR1_N			-107.5
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-85	-114
		NR_FDD_FR1_B			-113.5
		NR_TDD_FR1_C			-113
		NR_FDD_FR1_D, NR_TDD_FR1_D			-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-112
		NR_FDD_FR1_F			-111.5
		NR_FDD_FR1_G			-111
		NR_FDD_FR1_H			-110.5
		NR_FDD_FR1_N			-107.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88	-111
		NR_FDD_FR1_B			-110.5
		NR_TDD_FR1_C			-110
		NR_FDD_FR1_D, NR_TDD_FR1_D			-109.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-109
		NR_FDD_FR1_F			-108.5
		NR_FDD_FR1_G			-108
		NR_FDD_FR1_H			-107.5
		NR_FDD_FR1_N			-104.5
$\hat{E}_s / I_{ot}$			dB	-1.76	-5.46
$\hat{E}_s / N_{oc}$			dB	3	-4
SS-RSRP Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-82	-118
		NR_FDD_FR1_B			-117.5
		NR_TDD_FR1_C			-117
		NR_FDD_FR1_D, NR_TDD_FR1_D			-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-116
		NR_FDD_FR1_F			-115.5
		NR_FDD_FR1_G			-115
		NR_FDD_FR1_H			-114.5
		NR_FDD_FR1_N			-111.5

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-115
		NR_FDD_FR1_B			-114.5
		NR_TDD_FR1_C			-114
		NR_FDD_FR1_D, NR_TDD_FR1_D			-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-113
		NR_FDD_FR1_F			-112.5
		NR_FDD_FR1_G			-112
		NR_FDD_FR1_H			-111.5
		NR_FDD_FR1_N			-108.5
SS-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-17.34
		NR_FDD_FR1_B			
		NR_TDD_FR1_C			
		NR_FDD_FR1_D, NR_TDD_FR1_D			
		NR_FDD_FR1_E, NR_TDD_FR1_E			
		NR_FDD_FR1_F			
		NR_FDD_FR1_G			
		NR_FDD_FR1_H			
		NR_FDD_FR1_N			
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50	-83.5
		NR_FDD_FR1_B			-83
		NR_TDD_FR1_C			-82.5
		NR_FDD_FR1_D, NR_TDD_FR1_D			-82
		NR_FDD_FR1_E, NR_TDD_FR1_E			-81.5
		NR_FDD_FR1_F			-81
		NR_FDD_FR1_G			-80.5
		NR_FDD_FR1_H			-80
		NR_FDD_FR1_N			-77
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-50	-77.4
		NR_FDD_FR1_B			-76.9
		NR_TDD_FR1_C			-76.4
		NR_FDD_FR1_D, NR_TDD_FR1_D			-75.9
		NR_FDD_FR1_E, NR_TDD_FR1_E			-75.4
		NR_FDD_FR1_F			-74.9
		NR_FDD_FR1_G			-74.4
		NR_FDD_FR1_H			-73.9
		NR_FDD_FR1_N			-70.9
Propagation condition			-	AWGN	AWGN
Antenna configuration			-	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3A.4.1.

Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 13.4.2.1.5-3: Absolute accuracy requirements for the reported values for NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	SS-RSRQ_52	SS-RSRQ_44
Highest reported value (Cell 3)	SS-RSRQ_62	SS-RSRQ_59
Extreme Conditions		
Lowest reported value (Cell 3)	SS-RSRQ_49	SS-RSRQ_43
Highest reported value (Cell 3)	SS-RSRQ_65	SS-RSRQ_60

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

13.4.3 SS-SINR

13.4.3.0 Minimum Conformance Requirements

13.4.3.0.1 Intra-frequency absolute SS-SINR measurement accuracy requirements under CCA

Same as section 10.5.3.0.1.

13.4.3.0.2 Intra-frequency relative SS-SINR measurement accuracy requirements under CCA

Same as section 10.5.3.0.2.

13.4.3.0.3 Inter-frequency absolute SS-SINR measurement accuracy requirements under CCA

Same as section 10.5.3.0.3.

13.4.3.0.4 Inter-frequency relative SS-SINR measurement accuracy requirements under CCA

Same as section 10.5.3.0.4.

13.4.3.1 NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA

13.4.3.1.1 Test purpose

The purpose of this test is to verify that the SS-SINR measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will partially verify the SS-SINR measurement accuracy requirements in section 13.4.3.0.1.

13.4.3.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier and supporting RRM and SS-SINR measurements on shared spectrum.

13.4.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.4.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.4.3.1.

13.4.3.1.4 Test description

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). Supported test configurations are shown in Table 13.4.3.1.4.1-1. The absolute accuracy of SS-SINR intra-frequency measurements is tested by using the parameters in Tables 13.4.3.1.5-1, 13.4.3.1.5-2 and 13.4.3.1.5-3. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 1, 2, and 3.

13.4.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.4.3.1.4.1-1.

Table 13.4.3.1.4.1-1: Supported test configurations for NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA

Config	Description
13.4.3.1-1	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
13.4.3.1-2	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
13.4.3.1-3	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 13.4.3.1.4.1-2.

Table 13.4.3.1.4.1-2: Initial conditions for NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.4.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The test parameter settings are set up according to Tables 13.4.3.1.5-1 and 13.4.3.1.5-2.
2. Message contents are defined in clause 13.4.3.1.4.3.
3. Cell 1, Cell 2 and Cell 3 are NR cells with power levels set according to clauses C.1.2 and C.1.3. In addition, Cell 2 and Cell 3 are on an unlicensed carrier subject to CCA.

13.4.3.1.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Tables 13.4.3.1.5-1 and 13.4.3.1.5-2 as appropriate.

3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 adding Cell 2 as SCell as specified in section 13.4.3.1.4.3.

4. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration.

5. The SS shall transmit an *RRCReconfiguration* on Cell 1 configuring the UE to perform intra-frequency SS-SINR measurements on the SCC as specified in section 13.4.3.1.4.3.

6. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 13.4.3.1.5-1.

7. The UE shall transmit periodical *MeasurementReport* messages.

8. After 10s wait from Step 5, the SS shall check the SS-SINR reported values in the periodic *MeasurementReport*. The SS-SINR value of Cell 3 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 13.4.3.1.5-2 or the UE fails to report the measurement value for Cell 3, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

9. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

10. Repeat steps 1-9 for each Test in Table 13.4.3.1.5-1 as appropriate.

13.4.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.4.3.1.4.3-1: Common Exception messages for NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel accessH.3.10-2 with Condition SMTC.1 CCA

Table 13.4.3.1.4.3-2: *RRCReconfiguration* (step 2, SCell addition) for NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig-DEFAULT	Measurements configuration	NR_MEAS
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig-SCell(n)	n is number of SCC to be added	SCell_add
}			
}			
}			
}			

Table 13.4.3.1.4.3-3: *ReportConfigNR* for NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

13.4.3.1.5 Test requirements

Tables 13.4.3.1.5-1, 13.4.3.1.5-2 and 13.4.3.1.5-3 define the primary level settings including test tolerances for all tests for NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA.

Table 13.4.3.1.5-1: Cell specific test parameters for CCA cells for NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA

Parameter		**Unit**	**Test 1**		**Test 2**	
			Cell 2	**Cell 3**	**Cell 2**	**Cell 3**
SSB ARFCN			freq2	freq2	freq2	freq2
DL CCA model	Config 1, 2, 3		As specified in clause D.7.2.1			
UL CCA model	Config 1, 2, 3		As specified in clause D.7.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1, 2, 3		TDD			
TDD configuration	Config 1, 2, 3		TDDConf.1.1 CCA			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1, 2, 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1, 2, 3		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1, 2, 3		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1, 2, 3		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
DBT Window configuration	Config 1, 2, 3		DBT.1			
Time offset with Cell 1	Config 1, 2, 3	µs	3 (for Cell 2)	3	3 (for Cell 2)	3
SSB configuration	Config 1, 2, 3		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration	Config 1, 2, 3		SMTC.1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 3	kHz	30			

EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93.2		-112	
		NR_CCA_FR1_J				-111.5	
N_{oc} Note2	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-90.2		-109	
		NR_CCA_FR1_J				-108.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.10	-5.10
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-3.5	-3.5
SS-RSRP Note 3	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-85.65	-87.53	-112.49	-112.49
		NR_CCA_FR1_J				-111.99	-111.99
SS-SINR Note3		NR_CCA_FR1_I	dB	0	-3.19	-5.10	-5.10
		NR_CCA_FR1_J					
Io Note3	Config 1, 2, 3	NR_CCA_FR1_I	dBm/38.16MHz	-51.59		-75.17	
		NR_CCA_FR1_J				-74.67	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in 38.133 [6] clause 3.5.2.

Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.

Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.

Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 9: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table 13.4.3.1.5-2: Cell specific test parameters for PCell for NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA

Parameter		Unit	Test 1	Test 2
			Cell 1	Cell 1
SSB ARFCN			freq1	freq1
Duplex mode	Config 1		FDD	FDD
	Config 2,3		TDD	TDD
TDD configuration	Config 1		Not Applicable	Not Applicable
	Config 2		TDDConf.1.1	TDDConf.1.1

		Config 3		TDDConf.2.1	TDDConf.2.1
Downlink initial BWP configuration				DLBWP.0.1	DLBWP.0.1
Downlink dedicated BWP configuration				DLBWP.1.1	DLBWP.1.1
Uplink initial BWP configuration				ULBWP.0.1	ULBWP.0.1
Uplink dedicated BWP configuration				ULBWP.1.1	ULBWP.1.1
DRX Cycle configuration			ms	Not Applicable	Not Applicable
TRS configuration		Config 1		TRS.1.1 FDD	TRS.1.1 FDD
		Config 2		TRS.1.1 TDD	TRS.1.1 TDD
		Config 3		TRS.1.2 TDD	TRS.1.2 TDD
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD	SR.1.1 FDD
		Config 2		SR.1.1 TDD	SR.1.1 TDD
		Config 3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD	CR.1.1 FDD
		Config 2		CR.1.1 TDD	CR.1.1 TDD
		Config 3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 FDD	CCR.1.1 FDD
		Config 2		CCR.1.1 TDD	CCR.1.1 TDD
		Config 3		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns				OP.1	OP.1
SS-RSSI-Measurement				Not Applicable	Not Applicable
SMTC configuration		Config 1 Config 2,3		SMTC.2	SMTC.2
				SMTC.1	SMTC.1
SSB configuration		Config 1,2		SSB.1 FR1	SSB.1 FR1
		Config 3		SSB.2 FR1	SSB.2 FR1
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15	15
		Config 3		30	30
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-93	-116
		NR_FDD_FR1_B			-115.5
		NR_TDD_FR1_C			-115
		NR_FDD_FR1_D, NR_TDD_FR1_D			-114.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-114
		NR_FDD_FR1_F			-113.5
		NR_FDD_FR1_G			-113
		NR_FDD_FR1_H			-112.5
		NR_FDD_FR1_N			-109.5
N_{oc} Note2	Config 1,2		dBm/SCS	-93	Same as Noc for 15 kHz
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90	-113
		NR_FDD_FR1_B			-112.5
		NR_TDD_FR1_C			-112

		NR_FDD_FR1_D, NR_TDD_FR1_D			-111.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-111
		NR_FDD_FR1_F			-110.5
		NR_FDD_FR1_G			-110
		NR_FDD_FR1_H			-109.5
		NR_FDD_FR1_N			-106.5
$\hat{E}_s / I_{ot}$			dB	0	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	-4
SS-RSRP Note 3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-120
		NR_FDD_FR1_B			-119.5
		NR_TDD_FR1_C			-119
		NR_FDD_FR1_D, NR_TDD_FR1_D			-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-118
		NR_FDD_FR1_F			-117.5
		NR_FDD_FR1_G			-117
		NR_FDD_FR1_H			-116.5
		NR_FDD_FR1_N			-113.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-117
		NR_FDD_FR1_B			-116.5
		NR_TDD_FR1_C			-116
		NR_FDD_FR1_D, NR_TDD_FR1_D			-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-115
		NR_FDD_FR1_F			-114.5
		NR_FDD_FR1_G			-114
		NR_FDD_FR1_H			-113.5
		NR_FDD_FR1_N			-110.5
SS-SINR Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-5.46
		NR_FDD_FR1_B			
		NR_TDD_FR1_C			
		NR_FDD_FR1_D, NR_TDD_FR1_D			
		NR_FDD_FR1_E, NR_TDD_FR1_E			
		NR_FDD_FR1_F			
		NR_FDD_FR1_G			
		NR_FDD_FR1_H			
		NR_FDD_FR1_N			
Io Note3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5	-85.51
		NR_FDD_FR1_B			-85.01
		NR_TDD_FR1_C			-84.51
		NR_FDD_FR1_D, NR_TDD_FR1_D			-84.01
		NR_FDD_FR1_E, NR_TDD_FR1_E			-83.51
		NR_FDD_FR1_F			-83.01
		NR_FDD_FR1_G			-82.51
		NR_FDD_FR1_H			-82.01
		NR_FDD_FR1_N			-79.01
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.41	-79.41

		NR_FDD_FR1_B			-78.91
		NR_TDD_FR1_C			-78.41
		NR_FDD_FR1_D, NR_TDD_FR1_D			-77.91
		NR_FDD_FR1_E, NR_TDD_FR1_E			-77.41
		NR_FDD_FR1_F			-76.91
		NR_FDD_FR1_G			-76.41
		NR_FDD_FR1_H			-75.91
		NR_FDD_FR1_N			-72.91
Propagation condition			-	AWGN	AWGN
Antenna configuration			-	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: NR operating band groups are as defined in 38.133 [6] clause 3.5.2. Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

Table 13.4.3.1.5-3: Absolute accuracy requirements for the reported values for NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 3)	SS-SINR_31	SS-SINR_28
Highest reported value (Cell 3)	SS-SINR_49	SS-SINR_45
Extreme Conditions		
Lowest reported value (Cell 3)	SS-SINR_30	SS-SINR_27
Highest reported value (Cell 3)	SS-SINR_50	SS-SINR_46

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

13.4.4 L1-RSRP measurement for beam reporting with CCA serving cell

13.4.4.0 Minimum Conformance Requirements

13.4.4.0.1 SSB-based L1-RSRP measurement absolute accuracy under CCA

Same as section 10.5.4.0.1.1.

13.4.4.0.2 SSB-based L1-RSRP measurement relative accuracy under CCA

Same as section 10.5.4.0.1.2.

13.4.4.1 NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA

13.4.4.1.1 Test purpose

The purpose of this test is to verify that the L1-RSRP measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will partially verify the L1-RSRP measurement accuracy requirements in section 13.4.4.0.1 and 13.4.4.0.2.

13.4.4.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier and supporting RRM and UL with a shared spectrum NR carrier.

13.4.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.4.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.4.4.1.

13.4.4.1.4 Test description

In this set of test cases there are two cells in the test, PCell (Cell 1) and a SCell under CCA (Cell2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model.

Two sub-tests (Test 1 and Test 2) are provided with different N_{oc} on Cell 2. The test parameters for the Cell 1 and Cell 2 as well as the absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Tables 13.4.4.1.5-1, 13.4.4.1.5-2 and 13.4.4.1.5-3.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. On Cell 2, UE is configured to perform L1-RSRP measurement based on the SSB resources 0 and 1.

13.4.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.4.4.1.4.1-1.

Table 13.4.4.1.4.1-1: Supported test configurations for NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA

Config	Description
13.4.4.1-1	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
13.4.4.1-2	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
13.4.4.1-3	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Configure the test equipment and the DUT according to the parameters in Table 13.4.4.1.4.1-2.

Table 13.4.4.1.4.1-2: Initial conditions for NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.4.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part	

1. The test parameter settings are set up according to Tables 13.4.4.1.5-1 and 13.4.4.1.5-2.
2. Message contents are defined in clause 13.4.4.1.4.3.
3. Cell 1 and Cell 2 are NR cells with power levels set according to clauses C.1.2 and C.1.3. In addition, Cell 2 is on an unlicensed carrier subject to CCA.

13.4.4.1.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 13.4.4.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 adding Cell 2 as SCell as specified in section 13.4.4.1.4.3.
4. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration.
5. The SS shall transmit an *RRCReconfiguration* on Cell 1 configuring the UE to perform L1-RSRP measurements on the SCell as specified in section 13.4.4.1.4.3.
6. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 13.4.4.1.5-1.
7. The UE shall transmit periodical PUCCH format 2 CSI reports containing L1-RSRP measurements for the SCell every 80 slots.
8. After 10s wait from Step 6, the SS shall check the L1-RSRP reported values in the periodic CSI reports:

   R1: The SS shall check the L1-RSRP reported values of SSB#0 or SSB#1 in the periodic L1-RSRP reports. If the value for the strongest SSB is within the limits in Table 13.4.4.1.5-2, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.

   R2: The SS shall check the L1-RSRP reported values of SSB#0 and SSB#1 in the periodic L1-RSRP reports. The DIFF-RSRP value of SSB#0 or SSB#1 reported by the UE is compared to the expected DIFF-RSRP. If the DIFF-RSRP value is within the limits in Table 13.4.4.1.5-3, the number of passed iterations is increased by one, otherwise the number of failed iterations is increased by one.
9. The SS shall continue checking the L1-RSRP reports transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
10. Repeat steps 1-9 for each Test in Table 13.4.4.1.5-1 as appropriate.

13.4.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.4.4.1.4.3-1: Common Exception messages for NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with condition SSB Table H.3.6-10 Table H.3.10-1 with Condition SSB.3 CCA and SemiStatic, for semi-static channel access; or Condition SSB.4 CCA and Dynamic, for dynamic channel access

Table 13.4.4.1.4.3-2: RadioLinkMonitoringConfig for NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

13.4.4.1.5 Test requirements

Tables 13.4.4.1.5-1, 13.4.4.1.5-2 and 13.4.4.1.5-3 define the primary level settings including test tolerances for all tests for NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA.

Table 13.4.4.1.5-1: Cell specific test parameters for NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA

Parameter	**Config**	**Unit**	**Test 1**		**Test 2**	
			Cell 1	**Cell 2**	**Cell 1**	**Cell 2**
Active PCell/SCell Configuration	1~3		PCell	SCell	PCell	SCell
SSB GSCN	1~3		freq1	freq2	freq1	freq2
DL CCA model	1~3		N/A	As specifieed in D.7.2.1	N/A	As specifieed in D.7.2.1
UL CCA model	1~3		N/A	As specified in D.7.2.2	N/A	As specified in D.7.2.2
Duplex mode	1		FDD	TDD	FDD	TDD
	2,3		TDD		TDD	
TDD configuration	1		N/A	TDDConf.1.1 CCA	N/A	TDDConf.1.1 CCA
	2		TDDConf. 1.1		TDDConf.1 .1	
	3		TDDConf. 2.1		TDDConf.2 .1	
$BW_{channel}$	1	MHz	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106	10: $N_{RB,c}$ = 52	40: $N_{RB,c}$ = 106
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		40: $N_{RB,c}$ = 106		40: $N_{RB,c}$ = 106	
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 CCA	SR.1.1 FDD	SR.1.1 CCA
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 CCA	CR.1.1 FDD	CR.1.1 CCA
	2		CR.1.1 TDD		CR.1.1 TDD	

		3		CR.2.1 TDD		CR.2.1 TDD		
Dedicated CORESET Reference Channel		1		CCR.1.1 FDD	CCR.1.1 CCA	CCR.1.1 FDD	CCR.1.1 CCA	
		2		CCR.1.1 TDD		CCR.1.1 TDD		
		3		CCR.2.1 TDD		CCR.2.1 TDD		
SSB configuration for Semi-static channel access		1		SSB.3 FR1	SSB.3 CCA	SSB.3 FR1	SSB.3 CCA	
		2		SSB.3 FR1		SSB.3 FR1		
		3		SSB.4 FR1		SSB.4 FR1		
SSB configuration for Dynamic channel access		1		SSB.3 FR1	SSB.4 CCA	SSB.3 FR1	SSB.4 CCA	
		2		SSB.3 FR1		SSB.3 FR1		
		3		SSB.4 FR1		SSB.4 FR1		
TRS configuration		1		TRS.1.1 FDD	TRS.1.2 TDD	TRS.1.1 FDD	TRS.1.2 TDD	
		2		TRS.1.1 TDD		TRS.1.1 TDD		
		3		TRS.1.2 TDD		TRS.1.2 TDD		
OCNG Patterns		1~3		OP.1		OP.1		
Initial BWP Configuration		1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		
Dedicated BWP configuration		1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1		
SMTC configuration		1~3		SMTC.1	N/A	SMTC.1	N/A	
DBT Window Configuration		1~3		N/A	DBT.1	N/A	DBT.1	
reportConfigType		1~3		periodic		periodic		
reportQuantity		1~3		ssb-Index-RSRP		ssb-Index-RSRP		
Number of reported RS		1~3		2		2		
L1-RSRP reporting period		1~3		slot80		slot80		
EPRE ratio of PSS to SSS		1~3	dB	0		0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH DMRS								
EPRE ratio of OCNG DMRS to SSS Note 1								
EPRE ratio of OCNG to OCNG DMRS Note 1								
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15 kHz	-94.65	-96	-94.65	-	
	NR_FDD_FR1_B						-	
	NR_TDD_FR1_C						-	
	NR_FDD_FR1_D, NR_TDD_FR1_D						-	
	NR_FDD_FR1_E, NR_TDD_FR1_E						-	
	NR_FDD_FR1_F						-	
	NR_FDD_FR1_G						-	
	NR_FDD_FR1_H						-	
	NR_FDD_FR1_N						-	
	NR_TDD_FR1_I					-	-113	
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/SSB SCS	-91.65 for SCS 30kHz -94.65 for SCS 15kHz	-93	-91.65 for SCS 30kHz -94.65 for SCS 15kHz	-	
	NR_FDD_FR1_B						-	
	NR_TDD_FR1_C						-	
	NR_FDD_FR1_D, NR_TDD_FR1_D						-	

	NR_FDD_FR1_E, NR_TDD_FR1_E						-
	NR_FDD_FR1_F						-
	NR_FDD_FR1_G						-
	NR_FDD_FR1_H						-
	NR_FDD_FR1_N						-
	NR_TDD_FR1_I					-	-110
$\hat{E}_s/I_{ot}$		1~3	dB	10		10	-2.2
SS-RSRP[N ote3]	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/SCS	-81.65 for SCS 30kHz -84.65 for SCS 15kHz	-83	-81.65 for SCS 30kHz -84.65 for SCS 15kHz	-
	NR_FDD_FR1_B						-
	NR_TDD_FR1_C						-
	NR_FDD_FR1_D, NR_TDD_FR1_D						-
	NR_FDD_FR1_E, NR_TDD_FR1_E						-
	NR_FDD_FR1_F						-
	NR_FDD_FR1_G						-
	NR_FDD_FR1_H						-
	NR_FDD_FR1_N						-
	NR_TDD_FR1_I					-	-112.2
Io[Note3]	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/ 38.16MHz	-50.19	-51.53	-50.19	-
	NR_FDD_FR1_B						-
	NR_TDD_FR1_C						-
	NR_FDD_FR1_D, NR_TDD_FR1_D						-
	NR_FDD_FR1_E, NR_TDD_FR1_E						-
	NR_FDD_FR1_F						-
	NR_FDD_FR1_G						-
	NR_FDD_FR1_H						-
	NR_FDD_FR1_N						-
	NR_TDD_FR1_I					-	-76.90
$\hat{E}_s/N_{oc}$		1~3	dB	10		10	-2.2
Propagation condition		1~3		AWGN		AWGN	
Antenna configuration		1~3		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 13.4.4.1.5-2: Absolute accuracy requirements for the L1-RSRP reported values for NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	63	Bands NR_CCA_FR1_I	38
		Bands NR_CCA_FR1_J	38
Highest reported value (Cell 2)	84	Bands NR_CCA_FR1_I	51

		Bands NR_CCA_FR1_J	51
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	60	Bands NR_CCA_FR1_I	33
		Bands NR_CCA_FR1_J	33
Highest reported value (Cell 2)	87	Bands NR_CCA_FR1_I	56
		Bands NR_CCA_FR1_J	56
NOTE: NR operating band groups are defined in clause 3A.4.1, Table 3A.4.1-1			

Table 13.4.4.1.5-3: Relative accuracy requirements for the L1-RSRP reported values for NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2
Extreme Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

13.4.5 RSSI

13.4.5.0 Minimum Conformance Requirements

13.4.5.0.1 Intra-frequency absolute RSSI measurement accuracy requirements in FR1

Same as section 10.5.5.0.1.

13.4.5.0.2 Inter-frequency absolute RSSI measurement accuracy requirements in FR1

Same as section 10.5.5.0.2.

13.4.5.0.3 RSSI measurement report mapping

The reporting range of RSSI measurement is defined from -100 dBm to -25 dBm with 1 dBm resolution.

The mapping of the measured quantity is defined in Table 13.4.5.0.3-1. The range in the signalling may be larger than the guaranteed accuracy range, provided that the following condition is met:

the RSSI measurement bandwidth is the channel bandwidth defined in Clause 4 of TS 37.213 [37], where the channel has the center frequency configured by *ARFCN-valueNR*.

Table 13.4.5.0.3-1: RSSI measurement report mapping

Reported value	Measured quantity value	Unit
RSSI_00	RSSI < -100	dBm
RSSI_01	-100 ≤ RSSI < -99	dBm
RSSI_02	-99 ≤ RSSI < -98	dBm
…	…	…

RSSI_74	-27 ≤ RSSI < -26	dBm
RSSI_75	-26 ≤ RSSI < -25	dBm
RSSI_76	-25 ≤ RSSI	dBm

The normative reference for this requirement is TS 38.133 [6] clause 10.1.34.3.

13.4.5.1 NR SA FR1 RSSI measurement accuracy on a carrier with CCA

13.4.5.1.1 Test purpose

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in section 13.4.5.0.1.

13.4.5.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier and supporting RRM and Channel occupancy measurements on shared channel access.

13.4.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.4.5.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.4.5.1.

13.4.5.1.4 Test description

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the SCell with CCA. RSSI is measured on channel number 2. Supported test configurations are shown in Table 13.4.5.1.4.1-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in Tables 13.4.5.1.5-1, 13.4.5.1.5-2 and 13.4.5.1.5-3.

13.4.5.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.4.5.1.4.1-1.

Table 13.4.5.1.4.1-1: Supported test configurations for NR SA FR1 RSSI measurement accuracy on a carrier with CCA

Configuration	Description
13.4.5.1-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.4.5.1-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.4.5.1-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 13.4.5.1.4.1-2.

Table 13.4.5.1.4.1-2: Initial conditions for NR SA FR1 RSSI measurement accuracy on a carrier with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.4.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part	

1. The test parameter settings are set up according to Tables 13.4.5.1.5-1 and 13.4.5.1.5-2.
2. Message contents are defined in clause 13.4.5.1.4.3.
3. Cell 1 and Cell 2 are NR cells with power levels set according to clauses C.1.2 and C.1.3. In addition, Cell 2 is on an unlicensed carrier subject to CCA.

13.4.5.1.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 13.4.5.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 adding Cell 2 as SCell as specified in section 13.4.5.1.4.3.
4. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration.
5. The SS shall transmit an *RRCReconfiguration* on Cell 1 configuring the UE to perform intra-frequency RSSI measurements on the SCC according to the RMTC specified in section 13.4.5.1.4.3.
6. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 13.4.5.1.5-1.
7. The UE shall transmit periodical *MeasurementReport* messages.
8. After 10s wait from Step 5, the SS shall check the RSSI reported values in the periodic *MeasurementReport*. The RSSI value of Cell 2 reported by the UE is compared to the expected RSSI. If the value is outside the limits in Table 13.4.5.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
9. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
10. Repeat steps 1-9 for each Test in Table 13.4.5.1.5-1 as appropriate.

13.4.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.4.5.1.4.3-1: Common Exception messages for NR SA FR1 RSSI measurement accuracy on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTER-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access H.3.10-2 with Condition SMTC.1

Table 13.4.5.1.4.3-2: *MeasResults* for NR SA FR1 RSSI measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 13.4.5.1.4.3-3: *MeasResultForRSSI* for NR SA FR1 RSSI measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
rssi-Result-r16	measResultRSSI	RSSI-Range-r16, integer (0..76)	RSSI

13.4.5.1.5 Test requirements

Tables 13.4.5.1.5-1, 13.4.5.1.5-2 and 13.4.5.1.5-3 define the primary level settings including test tolerances for all tests for NR SA FR1 RSSI measurement accuracy on a carrier with CCA.

Table 13.4.5.1.5-1: Cell specific test parameters for NR SA FR1 RSSI measurement accuracy on a carrier with CCA

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.2 CCA
P_{CCA_DL} for dynamic channel access Note 1,3		1,2,3		1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75
P_{CCA_DL} for semi-static channel access Note 2,3		1,2,3		1	P_{CCA_DL}=0.9375
P_{CCA_UL}				1	1
DL CCA model				N/A	As specified in D.7.2.1
UL CCA model				N/A	As specified in D.7.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel		1		SR.1.1 FDD	SR.1.1 CCA
		2,3		SR.1.1 TDD	

RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 CCA
	2,3		CR.1.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 CCA
	2,3		CCR.1.1 TDD	
OCNG Patterns			OP.1	OP.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	

Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 13.4.5.1.5-2: RSSI RMTC parameters for NR SA FR1 RSSI measurement accuracy on a carrier with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

Table 13.4.5.1.5-3: Requirements for the reported values for NR SA FR1 RSSI measurement accuracy on a carrier with CCA

Normal Conditions	Test 1 All bands
Lowest RSSI reported value	35
Highest RSSI reported value	49
Extreme Conditions	**Test 1 All bands**
Lowest RSSI reported value	32
Highest RSSI reported value	52
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1	

The average RSSI measurement accuracy shall fulfil the requirements in section 13.4.5.0.1. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

13.4.5.2 NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA

13.4.5.2.1 Test purpose

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier and supporting RRM and Channel occupancy measurements on shared channel access.

13.4.5.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier and supporting RRM and Channel occupancy measurements on shared channel access.

13.4.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.4.5.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.4.5.2.

13.4.5.2.4 Test description

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the neighbour with CCA. RSSI is measured on channel number 2. Supported test configurations are shown in Table 13.4.5.2.4.1-1. The accuracy of RSSI inter-frequency measurements is tested by using the parameters in Tables 13.4.5.2.5-1, 13.4.5.2.5-2 and 13.4.5.2.5-3.

13.4.5.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.4.5.2.4.1-1.

Table 13.4.5.2.4.1-1: Supported test configurations for NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Configuration	Description
13.4.5.2-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.4.5.2-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.4.5.2-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 13.4.5.2.4.1-2.

Table 13.4.5.2.4.1-2: Initial conditions for NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.4.5.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The test parameter settings are set up according to Tables 13.4.5.2.5-1 and 13.4.5.2.5-2.
2. Message contents are defined in clause 13.4.5.2.4.3.
3. Cell 1 and Cell 2 are NR cells with power levels set according to clauses C.1.2 and C.1.3. In addition, Cell 2 is on an unlicensed carrier subject to CCA.

13.4.5.2.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 13.4.5.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* on Cell 1 configuring the UE to perform inter-frequency RSSI measurements according to the RMTC specified in section 13.4.5.2.4.3.
4. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 13.4.5.2.5-1.
5. The UE shall transmit periodical *MeasurementReport* messages.
6. After 10s wait from Step 5, the SS shall check the RSSI reported values in the periodic *MeasurementReport*. The RSSI value of Cell 2 reported by the UE is compared to the expected RSSI. If the value is outside the limits in Table 13.4.5.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.
8. Repeat steps 1-7 for each Test in Table 13.4.5.2.5-1 as appropriate.

13.4.5.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.4.5.2.4.3-1: Common Exception messages for NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTER-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access H.3.10-2 with Condition SMTC.1

Table 13.4.5.2.4.3-2: *MeasResults* for NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 13.4.5.2.4.3-3: *MeasResultForRSSI* for NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
rssi-Result-r16	measResultRSSI	RSSI-Range-r16, integer (0..76)	RSSI

13.4.5.2.5 Test requirements

Tables 13.4.5.2.5-1, 13.4.5.2.5-2 and 13.4.5.2.5-3 define the primary level settings including test tolerances for all tests for NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA.

Table 13.4.5.2.5-1: Cell specific test parameters for NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.2 CCA
P_{CCA_DL} for dynamic channel access Note 1,3		1,2,3		1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75

P_{CCA_DL} for semi-static channel access Note 2,3	1,2,3		1	P_{CCA_DL}=0.9375
P_{CCA_UL}			1	1
DL CCA model			N/A	As specifieed in D.7.2.1
UL CCA model			N/A	As specified in D.7.2.2
Measurement bandwidth		n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth		MHz	20	
DRX Cycle configuration		ms	Not Applicable	
PDSCH Reference measurement channel	1		SR.1.1 FDD	NA
	2,3		SR.1.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	NA
	2,3		CR.1.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	NA
	2,3		CCR.1.1 TDD	
OCNG Patterns			OP.1	NA
EPRE ratio of PSS to SSS		dB	0	NA
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-77.96	-58.96
Propagation condition		-	AWGN	

Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.

Note 3:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table 13.4.5.2.5-2: RSSI RMTC parameters for NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

Table 13.4.5.2.5-3: Requirements for the reported values for NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA

Normal Conditions	**Test 1 All bands**
Lowest RSSI reported value	35
Highest RSSI reported value	49
Extreme Conditions	**Test 1 All bands**
Lowest RSSI reported value	32
Highest RSSI reported value	52
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-1	

The average RSSI measurement accuracy shall fulfil the requirements in section 13.4.5.0.2. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

13.4.6 Channel Occupancy

13.4.6.0 Minimum Conformance Requirements

13.4.6.0.1 Intra-frequency channel occupancy measurement accuracy requirements in FR1

Same as section 10.5.6.0.1.

13.4.6.0.2 Inter-frequency channel occupancy measurement accuracy requirements in FR1

Same as section 10.5.6.0.2.

13.4.6.1 NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA

13.4.6.1.1 Test purpose

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in section 13.4.6.0.1.

13.4.6.1.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier and supporting RRM and Channel occupancy measurements on shared channel access.

13.4.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.4.6.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.4.6.1.

13.4.6.1.4 Test description

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the SCell with CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in Table 13.4.6.1.4.1-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in Tables 13.4.6.1.5-1, 13.4.6.1.5-2 and 13.4.6.1.5-3.

13.4.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.4.6.1.4.1-1.

Table 13.4.6.1.4.1-1: Supported test configurations for NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA

Configuration	Description
13.4.6.1-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.4.6.1-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.4.6.1-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 13.4.6.1.4.1-2.

Table 13.4.6.1.4.1-2: Initial conditions for NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.4.6.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The test parameter settings are set up according to Tables 13.4.6.1.5-1 and 13.4.6.1.5-2.
2. Message contents are defined in clause 13.4.6.1.4.3.
3. Cell 1 and Cell 2 are NR cells with power levels set according to clauses C.1.2 and C.1.3. In addition, Cell 2 is on an unlicensed carrier subject to CCA.

13.4.6.1.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 13.4.6.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 adding Cell 2 as SCell as specified in section 13.4.6.1.4.3.
4. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration.

5. The SS shall transmit an *RRCReconfiguration* on Cell 1 configuring the UE to perform intra-frequency channel occupancy measurements on the SCC according to the RMTC specified in section 13.4.6.1.4.3.

6. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 13.4.6.1.5-1.

7. The UE shall transmit periodical *MeasurementReport* messages.

8. After 10s wait from Step 5, the SS shall check the channel occupancy reported values in the periodic *MeasurementReport*. If the channel occupancy value of Cell 2 reported by the UE is less than 100%, or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

9. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

10. Repeat steps 1-9 for each Test in Table 13.4.6.1.5-1 as appropriate.

13.4.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.4.6.1.4.3-1: Common Exception messages for NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI and channelOccupancyThreshold set to 18 (value of -83dBm) Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 13.4.6.1.4.3-2: *MeasResults* for NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 13.4.6.1.4.3-3: *MeasResultForRSSI* for NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**

MeasResultForRSSI ::= SEQUENCE {			
channelOccupancy-r16	measResultChannelOccupancy	Integer (0..100)	Channel_Occupancy

13.4.6.1.5 Test requirements

Tables 13.4.6.1.5-1 and 13.4.6.1.5-2 define the primary level settings including test tolerances for all tests for NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA.

Table 13.4.6.1.5-1: Cell specific test parameters for NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.2 CCA
P_{CCA_DL} for dynamic channel access Note 1,3		1,2,3		1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75
P_{CCA_DL} for semi-static channel access Note 2,3		1,2,3		1	P_{CCA_DL}=0.9375
P_{CCA_UL}				1	1
DL CCA model				N/A	As specified in D.7.2.1
UL CCA model				N/A	As specified in D.7.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel		1		SR.1.1 FDD	SR.1.1 CCA
		2,3		SR.1.1 TDD	
RMSI CORESET Reference Channel		1		CR.1.1 FDD	CR.1.1 CCA
		2,3		CR.1.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.1.1 FDD	CCR.1.1 CCA
		2,3		CCR.1.1 TDD	
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106

N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table 13.4.6.1.5-2: Channel Occupancy RMTC parameters for NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

The nominal reported *channelOccupancy* shall be 100%. At least 90% of channel occupancy reports made by the UE shall indicate this value.

13.4.6.2 NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA

13.4.6.2.1 Test purpose

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in section 13.4.6.0.2.

13.4.6.2.2 Test applicability

This test applies to all types of NR UE release 16 and forward, supporting 2DL CA with a shared spectrum NR carrier and supporting RRM and Channel occupancy measurements on shared channel access.

13.4.6.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 13.4.6.0.

The normative reference for this requirement is TS 38.133 [6] clause A.13.4.6.2.

13.4.6.2.4 Test description

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the neighbour with CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in Table 13.4.6.2.4.1-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in Tables 13.4.6.2.5-1, 13.4.6.2.5-2 and 13.4.6.2.5-3.

13.4.6.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 13.4.6.2.4.1-1.

Table 13.4.6.2.4.1-1: Supported test configurations for NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA

Configuration	Description
13.4.6.2-1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.4.6.2-2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
13.4.6.2-3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 13.4.6.2.4.1-2.

Table 13.4.6.2.4.1-2: Initial conditions for NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.11-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 13.4.6.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	For 4Rx capable UEs without any 2Rx RF bands use A.3.2.5.2 for DUT Part. and A.3.1.8.4 for TE Part		

1. The test parameter settings are set up according to Tables 13.4.6.2.5-1 and 13.4.6.2.5-2.
2. Message contents are defined in clause 13.4.6.2.4.3.
3. Cell 1 and Cell 2 are NR cells with power levels set according to clauses C.1.2 and C.1.3. In addition, Cell 2 is on an unlicensed carrier subject to CCA.

13.4.6.2.4.2 Test procedure

The CCA model (both DL and UL) is disabled (i.e. $P_{CCA_DL_i}$= P_{CCA_UL}=1) at the start of the test. The SS shall provide sufficient UL grants to the UE such that no SR is required for measurement reporting.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On*, according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Table 13.4.6.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 adding Cell 2 as SCell as specified in section 13.4.6.2.4.3.
4. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration.

5. The SS shall transmit an *RRCReconfiguration* on Cell 1 configuring the UE to perform inter-frequency channel occupancy measurements according to the RMTC specified in section 13.4.6.2.4.3.

6. The UE shall transmit an *RRCReconfigurationComplete* to acknowledge the configuration. Afterwards, the SS shall enable DL and UL CCA model according to Table 13.4.6.2.5-1.

7. The UE shall transmit periodical *MeasurementReport* messages.

8. After 10s wait from Step 5, the SS shall check the channel occupancy reported values in the periodic *MeasurementReport*. If the channel occupancy value of Cell 2 reported by the UE is less than 100%, or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

9. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Annex G clause G.2.7 is achieved.

10. Repeat steps 1-9 for each Test in Table 13.4.6.2.5-1 as appropriate.

13.4.6.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 13.4.6.2.4.3-1: Common Exception messages for NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition INTRA-FREQ MO and RSSI Table H.3.1-4 with Condition RSSI and channelOccupancyThreshold set to 18 (value of -83dBm) Table H.3.1-5 Table H.3.1-7 Table H.3.10-1 with Condition SSB.1 CCA and SemiStatic, for semi-static channel access; or Condition SSB.2 CCA and Dynamic, for dynamic channel access Table H.3.10-2 with Condition SMTC.1

Table 13.4.6.2.4.3-2: *MeasResults* for NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measId	MeasId		
MeasResultServMO[1] SEQUENCE {		entry 1	
servCellId	ServCellIndex		
measResultServingCell SEQUENCE {			
physCellId	PhysCellId		
}			
measResultForRSSI-r16	MeasResultForRSSI		SharedSpectrum
}			
}			

Table 13.4.6.2.4.3-3: *MeasResultForRSSI* for NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA

Derivation Path: TS 38.508-1[14], Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**

MeasResultForRSSI ::= SEQUENCE {			
channelOccupancy-r16	measResultChannelOccupancy	Integer (0..100)	Channel_Occupancy

13.4.6.2.5 Test requirements

Tables 13.4.6.2.5-1 and 13.4.6.2.5-2 define the primary level settings including test tolerances for all tests for NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA.

Table 13.4.6.2.5-1: Cell specific test parameters for NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
$BW_{channel}$			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.2 CCA
P_{CCA_DL} for dynamic channel access Note 1,3		1,2,3		1	$P_{CCA_DL_1}$=0.75 $P_{CCA_DL_2}$=0.75
P_{CCA_DL} for semi-static channel access Note 2,3		1,2,3		1	P_{CCA_DL}=0.9375
P_{CCA_UL}				1	1
DL CCA model				N/A	As specified in D.7.2.1
UL CCA model				N/A	As specified in D.7.2.2
Measurement bandwidth			n_{PRB}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel		1		SR.1.1 FDD	SR.1.1 CCA
		2,3		SR.1.1 TDD	
RMSI CORESET Reference Channel		1		CR.1.1 FDD	CR.1.1 CCA
		2,3		CR.1.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.1.1 FDD	CCR.1.1 CCA
		2,3		CCR.1.1 TDD	
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106

N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table 13.4.6.2.5-2: Channel Occupancy RMTC parameters for NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

The nominal reported *channelOccupancy* shall be 100%. At least 90% of channel occupancy reports made by the UE shall indicate this value.

14 NR standalone tests for Satellite access

14.0 General

The Satellite Access tests defined in this clause apply provided that UE indicates *nonTerrestrialNetwork* and is accessing a cell served by a Satellite Access Node (SAN). The requirements apply provided that serving and all neighbour satellites on the same layer are of same satellite type (LEO or GEO).

14.0.1 Principle of testing GSO and NGSO scenarios

The test cases related to satellite access are defined for both GSO and NGSO. The testing principle for these test cases is as follows:

- A UE capable of GSO only is required to pass the test cases with GSO.

- A UE capable of NGSO only is required to pass the test cases with NGSO.
- A UE capable of both GSO and NGSO is required to pass the test cases with NGSO only.

Support of GSO and NGSO scenario is indicated via *ntn-ScenarioSupport-r17*.

14.0.2 Principle of testing different RRM requirements

Satellite Access RRM test cases are defined for all applicable RRM requirements. The testing principle for these test cases is as follows:

- A UE capable of NTN only is required to pass all the test cases defined in clause 14.
- A UE capable of both TN and NTN is required to pass the test cases for NTN specific requirements in Table 14.0.2-1.

Table 14.0.2-1: Test cases for NTN specific requirements

Clause	Test case slogan
14.1.2	SA FR1 Cell reselection for UE configured with [capability for enhanced requirements] for NR satellite access
14.1.3	SA FR1 Time-based cell reselection for NR satellite access
14.1.4	SA FR1 Location-based cell reselection for NR satellite access
14.1.7	SA FR1-FR1 Cell reselection for UE configured with [capability for enhanced requirements] for NR satellite access
14.1.8	SA FR1-FR1 Time-based Cell reselection for NR satellite access
14.1.9	SA FR1-FR1 Location-based Cell reselection for NR satellite access
14.2.1.3	SA FR1 SAN time-based conditional Handover for NR satellite access
14.2.1.4	SA FR1-FR1 SAN time-based conditional Handover for NR satellite access
14.2.1.5	SA FR1 SAN distance-based conditional Handover for NR satellite access
14.2.1.6	SA FR1-FR1 SAN distance-based conditional Handover for NR satellite access
14.3.1.1	SA FR1 NR UE Transmit Timing Test for NR satellite access
14.5.1.1	SA FR1 event triggered reporting tests without gap under non-DRX for NR satellite access
14.5.1.2	SA FR1 event triggered reporting tests without gap under DRX for NR satellite access
14.5.1.3	SA FR1 event triggered reporting tests without gap under non-DRX with SSB index reading for NR satellite access
14.5.1.4	SA FR1 event triggered reporting tests with single measurement gap under non-DRX for satellite access for NR satellite access
14.5.1.5	SA FR1 event triggered reporting tests with FNO concurrent gaps under DRX for satellite access for NR satellite access
14.5.1.6	SA FR1 event triggered reporting tests with PPO concurrent gaps under non-DRX with SSB index reading for satellite access for NR satellite access
14.5.2.1	SA FR1-FR1 Event triggered reporting test with single measurement gap under non-DRX for NR satellite access
14.5.2.2	SA FR1-FR1 Event triggered reporting tests with single measurement gap under DRX for NR satellite access
14.6.3.1	SA FR1 SS-SINR measurement accuracy for NR satellite access
14.6.3.2	SA FR1-FR1 SS-SINR measurement accuracy for NR satellite access
14.6.4.1	SA FR1 SSB based L1-RSRP measurement for NR satellite access
14.6.4.2	SA FR1 CSI-RS based L1-RSRP measurement on resource set with repetition off for NR satellite access

14.0.3 Principle of testing different ephemeris formats

Satellite access RRM test cases are defined such that satellite ephemeris information is sent to UE in each test case, according to Tables 14.0.3-1 and 14.0.3-2.

Table 14.0.3-1: Test cases configuring EphemerisInfo as PositionVelocity

Functional Area	Test Case
RRC_IDLE state mobility	14.1.3
	14.1.4
	14.1.5
	14.1.6
	14.1.9
	14.1.10
Handover	14.2.1.3
	14.2.1.4
	14.2.1.5
	14.2.1.6
Timing	14.3.1
Radio Link Monitoring	14.4.1.1
	14.4.1.2
	14.4.1.5
	14.4.1.6
BFD and LR procedures	14.4.2.1
	14.4.2.3
	14.4.2.5
Active BWP switch	14.4.3.1
UE specific CBW change	14.4.4.1
PL-RS switching delay	14.4.5.1
Intra-frequency measurements	14.5.1.1
	14.5.1.3
	14.5.1.5
Inter-frequency measurements	14.5.2.1
	14.5.2.3
	14.5.2.7
L1-RSRP measurements	14.5.3.1
	14.5.3.3
SS-RSRP accuracy	14.6.1.1
SS-RSRQ accuracy	14.6.2.1
SS-SINR accuracy	14.6.3.1
L1-RSRP accuracy	14.6.4.1

Table 14.0.3-2: Test cases configuring EphemerisInfo as Orbital

Functional Area	Test Case
RRC_IDLE state mobility	14.1.1
	14.1.2
	14.1.5
	14.1.6
Handover	14.2.1.1
	14.2.1.2
RRC Connection Mobility Control	14.2.2.1
	14.2.2.2
	14.2.2.3
Timing	14.3.2
Radio Link Monitoring	14.4.1.3
	14.4.1.4
	14.4.1.7
	14.4.1.8
BFD and LR procedures	14.4.2.2
	14.4.2.4
	14.4.2.6
Active BWP switch	14.4.3.2
Intra-frequency measurements	14.5.1.2
	14.5.1.4
	14.5.1.6
Inter-frequency measurements	14.5.2.2
	14.5.2.4
	14.5.2.6

	14.5.2.8
L1-RSRP measurements	14.5.3.2
	14.5.3.4
SS-RSRP accuracy	14.6.1.2
SS-RSRQ accuracy	14.6.2.2
SS-SINR accuracy	14.6.3.2
L1-RSRP accuracy	14.6.4.2

14.0.4 General setup for SIB19

The general parameters for SIB19 setup is specified in Table 14.0.4-1.

Table 14.0.4-1: SIB19 configuration for NTN test cases

Parameter	Unit	Test 1
Interval between adjacent epoch time	s	LEO: 2.56 GEO: 10.24
ntn-UlSyncValidityDuration	s	LEO: 5 GEO: 900
cellSpecificKoffset	slot	LEO: 8 GEO: 256
kmac	slot	Not configured
ta-Common		0
ta-CommonDrift		0
ta-CommonDriftVariant		0
ntn-PolarizationDL		linear
ntn-PolarizationUL		linear
ephemerisInfo		Detailed ephemeris information is provided in TS 38.508-1 [14]
ta-Report		Not configured

14.0.5 Initial test environment conditions for RRM NTN tests

The following initial conditions apply to all RRM satellite access specified in this section, unless otherwise specified in the test:

1. UE location according to TS 38.508-1 [14] clause 7.6.1 is provided to the UE through any preconfigured means.
2. Test equipment shall emulate the signal with doppler and delay according to ephemeris defined in TS 38.508-1 [14] Tables 7.6.2.1-1a and 7.6.2.1-1b for GSO at 30º elevation angle conditions for GSO configurations or Tables 7.6.2.1-2a and 7.6.2.1-2b for NGSO (LEO-600) at 30º elevation angle conditions for NGSO (LEO-600) configurations or Tables 7.6.2.1-3a and 7.6.2.1-3b for NGSO (LEO-1200) at 30º elevation angle conditions for NGSO (LEO-1200) configurations. Test system shall send same SIB19 information during the duration of the test as defined in TS 38.508-1 [14] clause 7.6.3.1.
3. Deactivate UE prediction of satellite trajectory by any preconfigured means.

Unless otherwise specified in the test, all multi-cell RRM test cases in clause 14 are configured such that all involved NR NTN cells belong to the same satellite.

14.1 RRC_IDLE state mobility

14.1.0 Minimum conformance requirements

14.1.0.1 Measurements of intra-frequency NR cells

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

If Srxlev > SnonIntraSearchP and Squal > SnonIntraSearchQ, and the distance between UE and serving cell reference location is smaller than *distanceThresh* if the *distanceThresh* is configured (see 38.304 [30]) and UE has location information, then the UE is not required to perform measurement of intra-frequency.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in 38.304 [30] within $K_{multi_SMTC} * T_{detect,NR_Intra}$ when that $T_{reselection}= 0$ if the UE does not support the feature for enhanced RRM requirements defined in 38.306 [11] or if the *enhancedMeasurementLEO-r17* is not enabled, or within $K_{multi_SMTC} * T_{detect,NR_Intra_enh}$ if the UE supports the feature for enhanced RRM requirements defined in 38.306 [11] and the *enhancedMeasurementLEO-r17* is enabled. An intra frequency cell is considered to be detectable according to the conditions defined in 38.133 [6] Annex B.1.6 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $K_{multi_SMTC} * T_{measure,NR_Intra}$ (see table 14.1.0.1-1) if the UE does not support the feature for enhanced RRM requirements defined in 38.306 [11] or if the *enhancedMeasurementLEO-r17* is not enabled, or every $K_{multi_SMTC} * T_{measure,NR_Intra_enh}$ (see table 14.1.0.1-2) if the UE supports the feature for enhanced RRM requirements defined in 38.306 [11] and the *enhancedMeasurementLEO-r17* is enabled, for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra}/2$.

If smtcs do not overlap with each other,

- $K_{multi_SMTC} = 1$, if GEO satellites are measured on the carrier;
- $K_{multi_SMTC} = \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if LEO satellites are measured on the carrier;

- If smtcs partially overlap with each other,
  - $K_{multi_SMTC} = N_{SMTC,overlap}$, if only GEO satellites are measured on the carrier;
  - $K_{multi_SMTC} = \sum_{i=1}^{N_{SMTC,overlap}} \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if only LEO satellites are measured on the carrier;

Where

- $N_{LEO,i}$ Is the number of LEO satellites to be measured within i-th SMTC,
- $N_{LEO,simul}$ Is the number of LEO satellites that UE can measure in parallel within an SMTC,
- $N_{SMTC,overlap}$ Is the number of smtcs that partially overlap with each other.

Note: for deriving K_{multi_SMTC} for T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$, two SMTCs are considered as overlapping if they overlap in one or more occasions during a single T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ or $T_{evaluate,NR_Intra}$.

The parameter K_{multi_SMTC} is the scaling factor for measurements of multiple SMTCs which correspond to different satellites.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in 38.304 [30] within $K_{multi_SMTC} * T_{evaluate,NR_Intra}$ if the UE does not support the feature for enhanced RRM requirements defined in 38.306 [11] or if the *enhancedMeasurementLEO-r17* is not enabled, or within $K_{multi_SMTC} * T_{evaluate,NR_Intra_enh}$ if the UE supports the feature for enhanced RRM requirements defined in 38.306 [11] and the *enhancedMeasurementLEO-r17* is enabled, when $T_{reselection} = 0$ as specified in table 14.1.0.1-1 or table 14.1.0.1-2 provided that:

- when *rangeToBestCell* is not configured:
- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2.
- when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in 38.304 [30] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.

  - if there are multiple such cells, the cell has the highest rank among them.

    - the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2 if the current serving cell is among them.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{reselection}$ timer has a nonzero value and the intra-frequency cell is satisfied with the reselection criteria which are defined in 38.304 [30], the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

Table 14.1.0.1-1: T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$

DRX cycle length [s]	Scaling Factor (N1)	T_{detect,NR_Intra} [s] (number of DRX cycles)	$T_{measure,NR_Intra}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra}$ [s] (number of DRX cycles)
	FR1			
0.32	1	11.52 x N1 x M2 (36 x N1 x M2)	1.28 x N1 x M2 (4 x N1 x M2)	5.12 x N1 x M2 (16 x N1 x M2)
0.64		17.92 x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: M2 = 2 if SMTC periodicity of measured intra-frequency cell > 20 ms and $1<N_{SMTC} \leq 4$ upon more than 1 SMTC configured at the UE; M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms and $N_{SMTC}=1$ upon 1 SMTC configured at the UE; otherwise M2=1. Where, N_{SMTC} is the number of SMTCs configured by SAN If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T_{detect, NR_intra} is expected.				
Note 2: The UE is not required to meet the requirements for 2.56s DRX cycle length for earth-moving LEO deployment.				

Table 14.1.0.1-2: T_{detect,NR_Intra_enh}, $T_{measure,NR_Intra_enh}$ and $T_{evaluate,NR_Intra_enh}$

DRX cycle length [s]	T_{detect,NR_Intra_enh} [s] (number of DRX cycles)	$T_{measure,NR_Intra_enh}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_enh}$ [s] (number of DRX cycles)
0.32	2.56 x M2 (8 x M2) Note 1	0.32 x M3 (1 x M3) Note 1	0.96 x M4 (3 x M4) Note 1
0.64	5.12 (8)	0.64 (1)	1.92 (3)
1.28	8.96 (7)	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)
Note 1: When SMTC < = 40 ms, M2 = M3 = M4 = 1; and when SMTC > 40 ms, M2 = 2, M3 = M4 = 2.5			

If '*t-Service*' is broadcasted and applicable, UE shall be able to detect, measure, and evaluate neighbour cells before the serving cell stops serving the area regardless of whether the distance condition based on serving cell reference location is met or the legacy Srxlev/Squal condition are met, and when to start the detection, measurement and evaluation on neighbour cells is up to UE implementation. This requirement does not apply when the time span from the last slot of SI transmission within SI modification period where the broadcasting of the last updated value for t-Service is acquired by the UE for the first time to the first slot when the cell is scheduled to stop serving the area according to the broadcasted information is less than $T_{trigger}$.

$$T_{trigger} = \max(T_{detect,NR_Intra}, K_{carrier} * T_{detect,NR_Inter}),$$

where

- $K_{carrier}$ is the number of NR inter-frequency carriers indicated by the serving cell,

- T_{detect,NR_Intra} refers to intra-frequency cell detection delay in IDLE/INACTIVE mode defined Table 14.1.0.1-2,
- T_{detect,NR_Inter} refers to inter-frequency cell detection delay in IDLE/INACTIVE mode defined Table 14.1.0.2-2.

The requirements in this clause apply provided that the number of SMTCs for any inter-frequency carrier does not exceed the *parallelSMTC-r17*, otherwise UE may select one or subset of all the configured SMTCs sequentially for performing the measurements until all of the SMTCs can be measured. The selection of SMTCs to be used is up to UE implementation, and in this case, measurement period longer than the corresponding measurement period specified in Table 14.1.0.1-1 and Table 14.1.0.1-2 is expected.

The normative reference for this requirement is TS 38.133 [6] clause 4.2C.2.3.

14.1.0.2 Measurements of inter-frequency NR cells

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$, and the distance between UE and serving cell reference location is smaller than *distanceThresh* if *distanceThresh* is configured and UE has location information, then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in 38.133 [6] clause 4.2C.2.9.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$, or the distance between UE and serving cell reference location is larger than *distanceThresh* if *distanceThresh* is configured and UE has location information, then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. The requirements apply provided that the distance exceeds the *distanceThresh* by a margin of 50 m. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in 38.304 [30] within $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{detect,NR_Inter}$ if the UE does not support the feature for enhanced RRM requirements defined in 38.306 [11] or if the *enhancedMeasurementLEO-r17* is not enabled, or within $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{detect,NR_Inter_enh}$ if the UE supports the feature for enhanced RRM requirements defined in 38.306 [11] and the *enhancedMeasurementLEO-r17* is enabled, if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection}$ = 0 provided that the reselection criteria is met by a margin of at least [5]dB in FR1 for reselections based on ranking or [6]dB in FR1 for SS-RSRP reselections based on absolute priorities or [4]dB in FR1 for SS-RSRQ reselections based on absolute priorities. The parameter $K_{carrier}$ is the number of NR inter-frequency carriers indicated by the serving cell.

The parameter $K_{multi_SMTC,i}$ is the scaling factor for measurement of multiple SMTCs or multiple satellites

- If SMTCs do not overlap with each other,
  - $K_{multi_{SMTC},i} = 1$, if GEO satellites are measured on the carrier;
  - $K_{multi_{SMTC},i} = \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if LEO satellites are measured on the carrier;
- If SMTCs partially overlap with each other,
  - $K_{multi_{SMTC},i} = N_{SMTC,overlap}$, if only GEO satellites are measured on the carrier;
  - $K_{multi_{SMTC},i} = \sum_{i=1}^{N_{SMTC,overlap}} \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if only LEO satellites are measured on the carrier;

where:

$N_{LEO,i}$ is the number of LEO satellites to be measured within i-th SMTC,

$N_{LEO,simul}$ is the number of LEO satellites that UE can measure in parallel within an SMTC, $N_{SMTC,overlap}$ is the number of SMTCs that partially overlap with each other.

Note: for deriving $K_{multi_SMTC,i}$ for T_{detect,NR_Inter}, $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$ of frequency layer *i*, two SMTCs are considered as overlapping if they overlap in one or more occasions during a single T_{detect,NR_Inter}, $T_{measure,NR_Inter}$ or $T_{evaluate,NR_Inter}$.

An inter-frequency cell is considered to be detectable according to the conditions defined in 38.133 [6] Annex B.1.7 for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{measure,NR_Inter}$ (see table 14.1.0.2-1) if the UE does not support the feature for enhanced RRM requirements defined in 38.306 [11] or if the *enhancedMeasurementLEO-r17* is not enabled, or every $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{measure,NR_Inter_enh}$ (see table 14.1.0.2-2) if the UE supports the feature for enhanced RRM requirements defined in 38.306 [11] and the *enhancedMeasurementLEO-r17*is enabled, for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined 38.304 [30] within $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{evaluate,NR_Inter}$ if the UE does not support [capability for enhanced requirements] or if the [NW configuration for enhanced requirements] is not enabled, or within $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{evaluate,NR_Inter_enh}$ if the UE supports the feature for enhanced RRM requirements defined in 38.306 [11] and the *enhancedMeasurementLEO-r17* is enabled, when $T_{reselection} = 0$ as specified in table 14.1.0.2-1 provided that the reselection criteria is met by

- the condition when performing equal priority reselection and

  when *rangeToBestCell* is not configured:

  - the cell is at least [5]dB better ranked in FR1 or.

  when *rangeToBestCell* is configured:

  - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [30] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.

    - if there are multiple such cells, the cell has the highest rank among them

    - the cell is at least [5]dB better ranked in FR1 if the current serving cell is among them. or

- [6]dB in FR1 for SS-RSRP reselections based on absolute priorities or

- [4]dB in FR1 for SS-RSRQ reselections based on absolute priorities.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 14.1.0.2-1 under the following conditions:

- $T_{SMTC_intra} = T_{SMTC_inter} = 160$ ms; where
  - TSMTC_intra is the periodicity of the SMTC configured for the intra-frequency carrier if no identified intra-frequency cell is in the PCI list of smtc2-LP on this intra-frequency carrier; TSMTC_intra is the periodicity of the smtc2-LP configured for the intra-frequency carrier if at least one identified intra-frequency cell is in the PCI list of smtc2-LP on this intra-frequency carrier. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed for TSMTC_intra. If the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer Tdetect, NR_intra is expected.
  - TSMTC_inter is the actual SMTC periodicity used by the inter-frequency cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the inter-frequency carrier is assumed for TSMTC_inter. If the actual SSB transmission periodicity is greater than the SMTC configured for the inter-frequency carrier, longer Tdetect, NR_inter is expected.
  - SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and
  - SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion in TS38.304 [30].

Table 14.1.0.2-1: T_{detect,NR_Inter}, $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$

DRX cycle length [s]	Scaling Factor (N1)	T_{detect,NR_Inter} [s] (number of DRX cycles)	$T_{measure,NR_Inter}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter}$ [s] (number of DRX cycles)
	FR1			
0.32	1	11.52 x N1 x 1.5 (36 x N1 x 1.5)	1.28 x N1 x 1.5 (4 x N1 x 1.5)	5.12 x N1 x 1.5 (16 x N1 x 1.5)
0.64		17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: UE is not required to fulfil the requirements for 2.56s DRX cycle length for earth-moving LEO deployment.				

Table 14.1.0.2-2: T_{detect,NR_Inter_enh}, $T_{measure,NR_Inter_enh}$ and $T_{evaluate,NR_Inter_enh}$

DRX cycle length [s]	T_{detect,NR_Inter_enh} [s] (number of DRX cycles)	$T_{measure,NR_Inter_enh}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_enh}$ [s] (number of DRX cycles)
0.32	[3.2 x M2 (10 x M2)] Note 1	[0.32 x M3 ([1] x M3)] Note 1	0.96 x M4 (3 x M4) Note 1
0.64	[6.4 (10)]	[0.64 (1)]	1.92 (3)
1.28	[10.24 (8)]	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)
Note 1: When SMTC < = 40 ms, M2 = M3 = M4 = 1; and when SMTC > 40 ms, M2 = 1.5, M3 = M4 = 2			

If *t-Service* is broadcasted and applicable, UE shall be able to detect, measure, and evaluate neighbour cells before the serving cell stops serving the area regardless of whether the distance condition based on serving cell reference location or the legacy Srxlev/Squal condition are met, and when to start detection, measurement, and evaluation is up to UE implementation. This requirement does not apply when the time span from the last slot of SI transmission within SI modification period where the broadcasting of the last updated value for t-Service is acquired by the UE for the first time to the first slot when the cell is scheduled to stop serving the area according to the broadcasted information is less than $T_{trigger}$, and $T_{trigger} = \max(T_{detect,NR_Intra}, K_{carrier} * T_{detect,NR_Inter})$ when serving cell is below the search threshold, and $T_{trigger} = \max(T_{detect,NR_Intra}, N_{layer} * [60s])$ when serving cell is above the search threshold, where

- $K_{carrier}$ is the number of NR inter-frequency carriers indicated by the serving cell,
- N_{layer} is the total number of higher priority NR carrier frequencies broadcasted in system information,

- T_{detect,NR_Intra} refers to HST intra-frequency cell detection delay in IDLE/INACTIVE mode defined 38.133 [6] Table 4.2.2.3-2,

- T_{detect,NR_Inter} refers to HST inter-frequency cell detection delay in IDLE/INACTIVE mode defined 38.133 [6] Table 4.2.2.4-2.

The requirements in this clause apply provided that the number of SMTCs for any inter-frequency carrier does not exceed the [UE capability], otherwise UE may select one or subset of all the configured SMTCs sequentially until all of the SMTCs can be measured, the selection of SMTCs to be used is up to UE implementation, and longer measurement delay than the corresponding measurement period specified in Table 14.1.0.2-1 and Table 14.1.0.2-2 is expected.

The requirements in this clause apply provided that the valid information for the satellite serving the target cell has been provided by the serving cell.

The requirements in this clause apply provided that SSB of neighbour cells are within the time shifted SMTC.

The normative reference for this requirement is TS 38.133 [6] clause 4.2C.2.4.

14.1.1 NR SA FR1 Cell Reselection for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS
- Several test parameters and configuration are still in brackets

14.1.1.1 Test purpose

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 14.1.0.1.

14.1.1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.1.1.

14.1.1.4 Test description

The test scenario comprises of 1 NR carrier and 2 cells as given in tables 14.1.1.4.1-1, 14.1.1.4.1-3 and 14.1.1.5-1. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively.

14.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.1.1.4.1-1.

Table 14.1.1.4.1-1: Supported test configurations for NR SA FR1 Cell reselection for Satellite Access

Configuration	Description
14.1.1-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.1.1-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.1.1.4.1-2

Table 14.1.1.4.1-2: Initial conditions for NR SA FR1 Cell reselection for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.1.1.4.1-3.
2. Message contents are defined in clause 14.1.1.4.3.
3. Cell 1 and Cell 2 are NR cells with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.1.1.4.1-3: General test parameters for NR SA FR1 Cell reselection for Satellite Access

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell 1	
T2 end condition	Active cell		Cell 2	
	Neighbour cells		Cell 1	
Final condition	Active cell		Cell 1	
	Neighbour cells		Cell 2	
RF Channel Number			1	
Time offset between cells		ms	3	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			Not configured	
Ephemeris information			Note 1	
T1		s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	40 (NOTE 1)	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	15 (NOTE 1)	T3 needs to be defined so that cell re-selection reaction time is taken into account.
Note 1: If the test is performed in a NGSO configuration, and the scaling factor Kmulti_SMTC defined in clause 14.1.0.1 is greater than 1, according to UE capabilities, the duration of times T2 and T3 shall be scaled for the same factor to allow the UE to complete the cell reselection within the duration of the test case. Note 2: Detailed ephemeris information is provided in TS 38.508-1 [14]				

14.1.1.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD intra-frequency cells as given in table 14.1.1.4.1-3. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

For NGSO configurations, the number of LEO satellites that a UE can measure in parallel within an SMTC is a capability the UE reports via *maxNumber-NGSO-SatellitesWithinOneSMTC-r17*. This value will determine the requirement to be used in the test, as well as the duration of T2 and T3.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5. Cell 1 is an active cell and Cell 2 is powered off.

2. Set the parameters according to T1 in Table 14.1.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for this iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.1.1.5-1. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 34 seconds for GSO configurations or for NGSO configurations for UEs supporting measurement of only one LEO satellite in parallel within an SMTC, or within 66 seconds for NGSO configurations for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC, from the beginning of time period T2, then count a success for the event “Re-select newly detected Cell 2”. Otherwise count a fail for the event “Re-select newly detected Cell 2”.

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 1.

7a The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 14.1.1.5-1. T3 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

10. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 8 seconds for GSO configurations or for NGSO configurations for UEs supporting measurement of only one LEO satellite in parallel within an SMTC, or within 14.5 seconds for NGSO configurations for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC, from the beginning of time period T3, then count a success for the event “Re-select already detected Cell 1”. Otherwise count a fail for the event “Re-select already detected Cell 1”.

11. If the UE has re-selected to Cell 1 within T3, after the re-selection or when T3 expires, the SS shall send an *RRCRelease* message to the UE and then proceed with step 1 for the next iteration. Otherwise proceed with step 11a.

11a. The SS shall switch off and on the UE, and skip to step 1 for the next iteration.

12. Repeat step 2-11 until a test verdict has been achieved. Each of the events “Re-select newly detected Cell 2” and “Re-select already detected Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

14.1.1.4.3 Message contents

FFS

14.1.1.5 Test requirements

Table 14.1.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 Cell reselection for Satellite Access.

Table 14.1.1.5-1: Cell specific parameters for NR SA FR1 Cell reselection for Satellite Access

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2			NSC.1 for Config 1 NSC.2 for Config 2		
PDSCH RMC configuration		SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET configuration		CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET configuration		CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		OP.1 defined in A.2.1			OP.1 defined in A.2.1		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
SSB configuration		SSB.1 FR1			SSB.5 FR1		
SMTC configuration		SMTC.1 for Cell 1			SMTC.4 for Cell 2		
RLM-RS		SSB			SSB		
Qrxlevmin	dBm/SCS	-130			-130		
Pcompensation	dB	0			0		
$Qhyst_s$	dB	0			0		
$Qoffset_{s,n}$	dB	0			0		
Cell_selection_and_reselection_quality_measurement		SS-RSRP			SS-RSRP		
$\hat{E}_s/I_{ot}$	dB	16+TT	-3.11+TT	2.79+TT	-infinity	2.79+TT	-3.11+TT
N_{oc} Note2	dBm/SCS	-98+TT					
N_{oc} Note2	dBm/15 kHz	-98+TT					
$\hat{E}_s/N_{oc}$	dB	16+TT	13+TT	16+TT	-infinity	16+TT	13+TT
SS-RSRP Note3	dBm/SCS	-82+TT	-85+TT	-82+TT	-infinity	-82+TT	-85+TT
Io	dBm/9.36 MHz	-53.94+TT	-52.21+TT	-52.21+TT	Same as parameters specified in Cell 1 columns-		
Treselection	s	0+TT	0+TT	0+TT	0+TT	0+TT	0+TT
SintrasearchP	dB	60			60		
Propagation Condition		AWGN					

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than:

34 s if K_{multi_SMTC} is equal to 1 (see note on Table 14.1.1.4.1-3); or

66 s if K_{multi_SMTC} is equal to 2.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 1.

The cell re-selection delay to an already detected cell shall be less than:

8 s if K_{multi_SMTC} is equal to 1 (see note on Table 14.1.1.4.1-3); or

14.5 s if K_{multi_SMTC} is equal to 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $K_{multi_SMTC} * T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $K_{multi_SMTC} * T_{evaluate, NR_intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 14.1.0.1-1 in clause 14.1.0.1

$T_{evaluate, NR_intra}$ See Table 14.1.0.1-1 in clause 14.1.0.1

K_{multi_SMTC} is described in clause 14.1.0.1

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period and 80 ms period, respectively.

If $K_{multi_SMTC} = 1$, $K_{multi_SMTC} * T_{evaluate, NR_Intra} + T_{SI-NR} = 7.68$ s; allow 8 s. And $K_{multi_SMTC} * T_{detect, NR_intra} + T_{SI-NR} = 33.28$ s, allow 34s.

If K_multi_SMTC = 2, $K_{multi_SMTC} * T_{evaluate, NR_Intra} + T_{SI-NR} = 14.08$ s; allow 14.5 s. And $K_{multi_SMTC} * T_{detect, NR_intra} + T_{SI-NR} = 65.28$ s, allow 66s.

14.1.2 NR SA FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS
- Call setup and test procedure needs to be updated
- Applicability needs to be updated
- Exceptions to connection diagram may need to be updated
- Several sections are in brackets
- Several test parameters and configuration are still in brackets
- Annex E and F need to be updated

14.1.2.1 Test purpose

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 14.1.0.1.

14.1.2.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access [and enhanced RRM measurement requirements for NTN bands].

14.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.1.2.

14.1.2.4 Test description

The test scenario comprises of 1 NR carrier and 2 cells as given in tables 14.1.2.4.1-1, 14.1.2.4.1-3 and 14.1.2.5-1. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. The flag *enhancedMeasurementLEO-r17* should be set.

14.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.1.2.4.1-1.

Table 14.1.2.4.1-1: Supported test configurations for NR SA FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access

Configuration	Description
14.1.2-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.1.2-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.1.2.4.1-2

Table 14.1.2.4.1-2: Initial conditions for NR SA FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	[For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part]		[4Rx support is FFS, exceptions may need to be removed]

1. The general test parameter settings are set up according to Table 14.1.2.4.1-3.
2. Message contents are defined in clause 14.1.2.4.3.
3. Cell 1 and Cell 2 are NR cells with the power level set according to clauses [C.1.2 and C.1.3] for this test. [Both Cell 1 and Cell 2 are satellite access cells].
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.1.2.4.1-3: General test parameters for NR SA FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	

	Neighbour cells		Cell1	
Final condition	Active cell		Cell1	
	Neighbour cells		Cell2	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			Not configured	
T1		s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	40 (NOTE 1)	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	15 (NOTE 1)	T3 needs to be defined so that cell re-selection reaction time is taken into account.
NOTE 1: If the test is performed in a LEO configuration, and the scaling factor K_{multi_SMTC} defined in clause 14.1.0.1 is greater than 1, according to UE capabilities, the duration of times T2 and T3 shall be scaled for the same factor to allow the UE to complete the cell reselection within the duration of the test case.				

14.1.2.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD intra-frequency cells as given in table 14.1.2.4.1-3. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

For NGSO configurations, the number of LEO satellites that a UE can measure in parallel within an SMTC is a capability the UE reports via *maxNumber-NGSO-SatellitesWithinOneSMTC-r17*. This value will determine the requirement to be used in the test, as well as the duration of T2 and T3.

1. Ensure the UE is in [state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5]. Cell 1 is an active cell and Cell 2 is powered off.

2. Set the parameters according to T1 in Table 14.1.2.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for this iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.1.2.5-1. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 11 seconds for GSO configurations or for NGSO configurations for UEs supporting measurement of only one LEO satellite in parallel within an SMTC, or within 20 seconds for NGSO configurations for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC, from the beginning of time period T2, then count a success for the event “Re-select newly detected Cell 2”. Otherwise count a fail for the event “Re-select newly detected Cell 2”.

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11a.

7a The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 14.1.2.5-1. T3 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

10. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 6 seconds for GSO configurations or for NGSO configurations for UEs supporting measurement of only one LEO satellite in parallel within an SMTC, or within 9 seconds for NGSO configurations for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC, from the beginning of time period T3, then count a success for the event "Re-select already detected Cell 1". Otherwise count a fail for the event "Re-select already detected Cell 1".

11. If the UE has re-selected to Cell 1 within T3, after the re-selection or when T3 expires, the SS shall send an *RRCRelease* message to the UE and then proceed with step 1 for the next iteration. Otherwise proceed with step 11a.

11a. The SS shall switch off and on the UE, and skip to step 1 for the next iteration.

12. Repeat step 2-11 until a test verdict has been achieved. Each of the events "Re-select newly detected Cell 2" and "Re-select already detected Cell 1" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

14.1.2.4.3 Message contents

FFS

14.1.2.5 Test requirements

Table 14.1.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access.

Table 14.1.2.5-1: Cell specific parameters for NR SA FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2			NSC.1 for Config 1 NSC.2 for Config 2		
PDSCH RMC configuration		SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET configuration		CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET configuration		CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		OP.1			OP.1		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
SSB configuration		SSB.1 FR1			SSB.X FR1		
SMTC configuration		#1: SMTC.2 for Cell 1 #2: SMTC.7 for Cell 2			#1: SMTC.2 for Cell 1 #2: SMTC.7 for Cell 2		
RLM-RS		SSB			SSB		
Qrxlevmin	dBm/SCS	-130			-130		
Pcompensation	dB	0			0		
$Qhyst_s$	dB	0			0		
$Qoffset_{s,n}$	dB	0			0		

Cell_selection_and_reselection_quality_measurement		SS-RSRP			SS-RSRP		
$\hat{E}_s/I_{ot}$	dB	16+TT	-3.11+TT	2.79+TT	-infinity	2.79+TT	-3.11+TT
N_{oc} Note2	dBm/SCS	-98+TT					
N_{oc} Note2	dBm/15 kHz	-98+TT					
$\hat{E}_s/N_{oc}$	dB	16+TT	13+TT	16+TT	-infinity	16+TT	13+TT
SS-RSRP Note3	dBm/SCS	-82+TT	-85+TT	-82+TT	-infinity	-82+TT	-85+TT
Io	dBm/9.36 MHz	-53.94+TT	-52.21+TT	-52.21+TT	Same as parameters specified in Cell 1 columns-		
Treselection	s	0+TT	0+TT	0+TT	0+TT	0+TT	0+TT
SintrasearchP	dB	60			60		
Propagation Condition		AWGN					

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than:

11 s if K_{multi_SMTC} is equal to 1 (see note on Table 14.1.2.4.1-3); or

20 s if K_{multi_SMTC} is equal to 2.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 1 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than:

6 s if K_{multi_SMTC} is equal to 1 (see note on Table 14.1.2.4.1-3); or

9 s if K_{multi_SMTC} is equal to 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $K_{multi_SMTC} * T_{detect,\ NR_Intra_enh} + T_{SI\text{-}NR}$, and to an already detected cell can be expressed as: $K_{multi_SMTC} * T_{evaluate,\ NR_intra_enh} + T_{SI\text{-}NR}$,

Where:

$T_{detect,\ NR_Intra_enh}$ See Table 14.1.0.1-2 in clause 14.1.0.1

$T_{evaluate,\ NR_Intra_enh}$ See Table 14.1.0.1-2 in clause 14.1.0.1

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period and 80 ms period, respectively.

If $K_{multi_SMTC} = 1$, $K_{multi_SMTC} * T_{evaluate,\ NR_Intra_enh} + T_{SI\text{-}NR} = 5.12$ s; allow 6 s. And $K_{multi_SMTC} * T_{detect,\ NR_Intra_enh} + T_{SI\text{-}NR} = 10.24$ s, allow 11 s.

If K_multi_SMTC = 2, $K_{multi_SMTC} * T_{evaluate,\ NR_Intra_enh} + T_{SI\text{-}NR} = 8.96$ s; allow 9 s. And $K_{multi_SMTC} * T_{detect,\ NR_Intra_enh} + T_{SI\text{-}NR} = 19.2$ s, allow 20s.

In this test, SMTC.2 (period 20ms, duration 5ms, offset 0ms) and SMTC.7 (period 20ms, duration 5ms, offset 5ms) are configured. These are non-overlapping SMTCs therefore, according to clause 14.1.0.1, $K_{multi_SMTC} = 1$ for GEO, $K_{multi_SMTC} = 1$ for LEO for UEs supporting measurement of only one LEO satellite in parallel within an SMTC

($N_{LEO,simul} = 1$), and K_{multi_SMTC} = 2 for LEO for Ues supporting measurement of two or more LEO satellites in parallel within an SMTC ($N_{LEO,simul} = \{2,3,4\}$).

14.1.3 NR SA FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS
- Call setup and test procedure needs to be updated
- Applicability needs to be updated
- Exceptions to connection diagram may need to be updated
- Several sections are in brackets
- Several test parameters and configuration are still in brackets
- Annex E and F need to be updated

14.1.3.1 Test purpose

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 14.1.0.1.

14.1.3.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access [and time-based measurement initiation].

14.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.1.3.

14.1.3.4 Test description

The test scenario comprises of 1 NR carrier and 2 cells as given in tables 14.1.3.4.1-1, 14.1.3.4.1-3 and 14.1.3.5-1. The test consists of two successive time periods, with time duration of T1 and T2, respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. *T-Service* broadcasted in SIB19 of Cell 1 is set to the time point that is 36s after start of T2.

14.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.1.3.4.1-1.

Table 14.1.3.4.1-1: Supported test configurations for NR SA FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access

Configuration	Description
14.1.3-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.1.3-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.1.3.4.1-2

Table 14.1.3.4.1-2: Initial conditions for NR SA FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	[For 4Rx capable Ues without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part]		[4Rx support is FFS, exceptions may need to be removed]

1. The general test parameter settings are set up according to Table 14.1.3.4.1-3.
2. Message contents are defined in clause 14.1.3.4.3.
3. Cell 1 and Cell 2 are NR cells with the power level set according to clauses [C.1.2 and C.1.3] for this test. [Both Cell 1 and Cell 2 are satellite access cells].
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.1.3.4.1-3: General test parameters for NR SA FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	
	Neighbour cells		Cell1	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			Not configured	
T1		s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	40 (NOTE 1)	T2 needs to be defined so that cell re-selection reaction time is taken into account.
NOTE 1: If the test is performed in a LEO configuration, and the scaling factor K_{multi_SMTC} defined in clause 14.1.0.1 is greater than 1, according to UE capabilities, the duration of time T2 shall be scaled for the same factor to allow the UE to complete the cell reselection within the duration of the test case.				

14.1.3.4.2 Test procedure

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

For NGSO configurations, the number of LEO satellites that a UE can measure in parallel within an SMTC is a capability the UE reports via *maxNumber-NGSO-SatellitesWithinOneSMTC-r17*. This value will determine the requirement to be used in the test, as well as the duration of T2.

1. Ensure the UE is in [state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5]. Cell 1 is an active cell and Cell 2 is powered off.

2. Set the parameters according to T1 in Table 14.1.3.5-1. Propagation conditions are set according to Annex C clause C.2.2. *T-Service* broadcasted in SIB19 of Cell 1 is set to the time point that is 36s after start of T2, according to Table 14.1.3.4.3-FFS (this timestamp indicates the UE when Cell 1 will stop providing service). T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for this iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.1.3.5-1. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 34 seconds for GSO configurations or for NGSO configurations for Ues supporting measurement of only one LEO satellite in parallel within an SMTC, or within 66 seconds for NGSO configurations for Ues supporting measurement of two or more LEO satellites in parallel within an SMTC, from the beginning of time period T2, then count a success for the test.

7. If the UE has re-selected to Cell 2 within T2, after the re-selection or when T2 expires, the SS shall send an *RRCRelease* message to the UE and then proceed with step 1 for the next iteration. Otherwise proceed with step 7a.

7a. The SS shall switch off and on the UE, and skip to step 1 for the next iteration.

8. Repeat step 2-7 until a test verdict has been achieved.

14.1.3.4.3 Message contents

FFS

14.1.3.5 Test requirements

Table 14.1.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access.

Table 14.1.3.5-1: Cell specific parameters for NR SA FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2		NSC.1 for Config 1t NSC.2 for Config 2	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		OP.1		OP.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	

Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
$Qhyst_s$	dB	0		0	
$Qoffset_{s, n}$	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	16+TT	-3.11+TT	-infinity	2.79+TT
N_{oc} Note2	dBm/SCS	-98+TT			
N_{oc} Note2	dBm/15 kHz	-98+TT			
$\hat{E}_s / N_{oc}$	dB	16+TT	13+TT	-infinity	16+TT
SS-RSRP Note3	dBm/SCS	-82+TT	-85+TT	-infinity	-82+TT
Io	dBm/9.36 MHz	-53.94+TT	-52.21+TT	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintrasearchP	dB	40		40	
Propagation Condition		AWGN			

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than:

34 s if K_{multi_SMTC} is equal to 1 (see note on Table 14.1.3.4.1-3); or

66 s if K_{multi_SMTC} is equal to 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $K_{multi_SMTC} * T_{detect, NR_Intra} + T_{SI-NR}$,

Where:

T_{detect, NR_Intra} See Table 14.1.0.1-1 in clause 14.1.0.1

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period and 80 ms period, respectively.

If $K_{multi_SMTC} = 1$, $K_{multi_SMTC} * T_{detect, NR_intra} + T_{SI-NR} = 33.28$ s, allow 34s.

If $K_{multi_SMTC} = 2$, $K_{multi_SMTC} * T_{detect, NR_intra} + T_{SI-NR} = 65.28$ s, allow 66s.

In this test, SMTC.1 (period 20ms, duration 1ms, offset 0ms) is configured on both cells. Since only one SMTC is configured there is no chance for overlap, therefore according to clause 14.1.0.1, $K_{multi_SMTC} = 1$ for GEO, $K_{multi_SMTC} = 1$ for LEO for UEs supporting measurement of only one LEO satellite in parallel within an SMTC ($N_{LEO,simul} = 1$), and $K_{multi_SMTC} = 2$ for LEO for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC ($N_{LEO,simul} = \{2,3,4\}$).

14.1.4 NR SA FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS
- Call setup and test procedure needs to be updated
- Applicability needs to be updated
- Exceptions to connection diagram may need to be updated
- Several sections are in brackets
- Several test parameters and configuration are still in brackets
- Annex E and F need to be updated

14.1.4.1 Test purpose

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 14.1.0.1.

14.1.4.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access [and location-based measurement initiation].

14.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.1.4.

14.1.4.4 Test description

The test scenario comprises of 1 NR carrier and 2 cells as given in tables 14.1.4.4.1-1, 14.1.4.4.1-3 and 14.1.4.5-1. The test consists of two successive time periods, with time duration of T1 and T2, respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

At 4s after the start of T2, the UE location is changed such that the distance to the reference location broadcasted in SIB19 of Cell 1 is exceeded by the configured value in *distanceThresh* plus 50m.

14.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.1.4.4.1-1.

Table 14.1.4.4.1-1: Supported test configurations for NR SA FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access

Configuration	Description
14.1.4-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.1.4-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.1.4.4.1-2

Table 14.1.4.4.1-2: Initial conditions for NR SA FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.1.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	[For 4Rx capable Ues without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part]		[4Rx support is FFS, exceptions may need to be removed]

1. The general test parameter settings are set up according to Table 14.1.4.4.1-3.
2. Message contents are defined in clause 14.1.4.4.3.
3. Cell 1 and Cell 2 are NR cells with the power level set according to clauses [C.1.2 and C.1.3] for this test. [Both Cell 1 and Cell 2 are satellite access cells].
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.1.4.4.1-3: General test parameters for NR SA FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	
	Neighbour cells		Cell1	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			Not configured	
T1		s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	40 (NOTE 1)	T2 needs to be defined so that cell re-selection reaction time is taken into account.
NOTE 1: If the test is performed in a LEO configuration, and the scaling factor K_{multi_SMTC} defined in clause 14.1.0.1 is greater than 1, according to UE capabilities, the duration of time T2 shall be scaled for the same factor to allow the UE to complete the cell reselection within the duration of the test case.				

14.1.4.4.2 Test procedure

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

For NGSO configurations, the number of LEO satellites that a UE can measure in parallel within an SMTC is a capability the UE reports via *maxNumber-NGSO-SatellitesWithinOneSMTC-r17*. This value will determine the requirement to be used in the test, as well as the duration of T2.

1. Ensure the UE is in [state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5]. Cell 1 is an active cell and Cell 2 is powered off.
2. Set the parameters according to T1 in Table 14.1.4.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.
3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for this iteration of the test procedure loop.
4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.1.4.5-1. T2 starts.
5. After 4 seconds from the start of T2, the UE location is changed such that the distance to the reference location broadcasted in SIB19 of Cell 1 is exceeded by the configured value in *distanceThresh* plus 50m, according to Table 14.1.4.4.3-FFS.
6. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.
7. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 34 seconds for GSO configurations or for NGSO configurations for Ues supporting measurement of only one LEO satellite in parallel within an SMTC, or within 66 seconds for NGSO configurations for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC, from the beginning of time period T2, then count a success for the test.
8. If the UE has re-selected to Cell 2 within T2, after the re-selection or when T2 expires, the SS shall send an *RRCRelease* message to the UE and then proceed with step 1 for the next iteration. Otherwise proceed with step 8a.

8a. The SS shall switch off and on the UE, and skip to step 1 for the next iteration.

9. Repeat step 2-8 until a test verdict has been achieved.

14.1.4.4.3 Message contents

FFS

14.1.4.5 Test requirements

Table 14.1.4.5-1 defines the primary level settings including test tolerances for NR SA FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access.

Table 14.1.4.5-1: Cell specific parameters for NR SA FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2		NSC.1 for Config 1 NSC.2 for Config 2	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		OP.1		OP.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	

SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
$Qhyst_s$	dB	0		0	
$Qoffset_{s,n}$	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	16+TT	-3.11+TT	-infinity	2.79+TT
N_{oc} Note2	dBm/SCS	-98+TT			
N_{oc} Note2	dBm/15 kHz	-98+TT			
$\hat{E}_s/N_{oc}$	dB	16+TT	13+TT	-infinity	16+TT
SS-RSRP Note3	dBm/SCS	-82+TT	-85+TT	-infinity	-82+TT
Io	dBm/9.36 MHz	-53.94+TT	-52.21+TT	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintrasearchP	dB	40		40	
Propagation Condition		AWGN			

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than:

34 s if K_{multi_SMTC} is equal to 1 (see note on Table 14.1.4.4.1-3); or

66 s if K_{multi_SMTC} is equal to 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $K_{multi_SMTC} * T_{detect,\ NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $K_{multi_SMTC} * T_{evaluate,\ NR_intra} + T_{SI-NR}$,

Where:

$T_{detect,\ NR_Intra}$ See Table 14.1.0.1-1 in clause 14.1.0.1

$T_{evaluate,\ NR_intra}$ See Table 14.1.0.1-1 in clause 14.1.0.1

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period and 80 ms period, respectively.

If $K_{multi_SMTC} = 1$, $K_{multi_SMTC} * T_{detect,\ NR_intra} + T_{SI-NR} = 33.28$ s, allow 34s.

If $K_{multi_SMTC} = 2$, $K_{multi_SMTC} * T_{detect,\ NR_intra} + T_{SI-NR} = 65.28$ s, allow 66s.

In this test, SMTC.1 (period 20ms, duration 1ms, offset 0ms) is configured on both cells. Since only one SMTC is configured there is no chance for overlap, therefore according to clause 14.1.0.1, $K_{multi_SMTC} = 1$ for GEO, $K_{multi_SMTC} = 1$ for LEO for UEs supporting measurement of only one LEO satellite in parallel within an SMTC ($N_{LEO,simul} = 1$), and $K_{multi_SMTC} = 2$ for LEO for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC ($N_{LEO,simul} = \{2,3,4\}$).

14.1.5 NR SA FR1-FR1 Cell Reselection for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS
- Several test parameters and configuration are still in brackets

14.1.5.1 Test purpose

This test is to verify the requirement for the inter frequency NR cell reselection requirements for satellite access specified in clause 14.1.0.2.

14.1.5.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.1.5.

14.1.5.4 Test description

The test scenario comprises of 2 NR carriers and 2 cells as given in tables 14.1.5.4.1-1, 14.1.5.4.1-3 and 14.1.5.5-1. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively.

14.1.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.1.5.4.1-1.

Table 14.1.5.4.1-1: Supported test configurations for NR SA FR1-FR1 Cell reselection for Satellite Access

Configuration	Description
14.1.5-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.1.5-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.1.5.4.1-2

Table 14.1.5.4.1-2: Initial conditions for NR SA FR1-FR1 Cell reselection for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.1.5.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.1.5.4.1-3.
2. Message contents are defined in clause 14.1.5.4.3.
3. Cell 1 and Cell 2 are NR cells on two different carriers with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.

4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.1.5.4.1-3: General test parameters for NR SA FR1-FR1 Cell reselection for Satellite Access

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell 1	
T2 end condition	Active cell		1, 2	Cell 2	
	Neighbour cells		1, 2	Cell 1	
Final condition	Active cell		1, 2	Cell 1	
	Neighbour cells		1, 2	Cell 2	
RF Channel Number			1, 2	1,2	
Time offset between cells		ms	1, 2	3	Asynchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 2	SSB.1 FR1	
SMTC configuration#1			1, 2	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
SMTC configuration#2			1, 2	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
Ephemeris information			1, 2	Note 1	
T1		s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	1, 2	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	1, 2	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.
Note 1: Detailed ephemeris information is provided in TS 38.508-1 [14]					

14.1.5.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD inter-frequency cells as given in table 14.1.5.4.1-3. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5. Cell 1 is an active cell and Cell 2 is powered off.

2. Set the parameters according to T1 in Table 14.1.5.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for this iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.1.5.5-1. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 68 seconds for GSO configurations or for NGSO configurations for UEs supporting measurement of only one LEO satellite in parallel within an SMTC, [or within FFS seconds for NGSO configurations for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC] from the beginning of time period T2, then count a success for the event "Re-select newly detected Cell 2". Otherwise count a fail for the event "Re-select newly detected Cell 2".

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 1.

7a The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 14.1.5.5-1. T3 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

10. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 8 seconds for GSO configurations or for NGSO configurations for UEs supporting measurement of only one LEO satellite in parallel within an SMTC, [or within FFS seconds for NGSO configurations for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC], from the beginning of time period T3, then count a success for the event "Re-select already detected Cell 1". Otherwise count a fail for the event "Re-select already detected Cell 1".

11. If the UE has re-selected to Cell 1 within T3, after the re-selection or when T3 expires, the SS shall send an *RRCRelease* message to the UE and then proceed with step 1 for the next iteration. Otherwise proceed with step 11a.

11a. The SS shall switch off and on the UE, and skip to step 1 for the next iteration.

12. Repeat step 2-11 until a test verdict has been achieved. Each of the events "Re-select newly detected Cell 2" and "Re-select already detected Cell 1" is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

14.1.5.4.3 Message contents

FFS

14.1.5.5 Test requirements

Table 14.1.5.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 Cell reselection for Satellite Access.

Table 14.1.5.5-1: Cell specific parameters for NR SA FR1-FR1 Cell reselection for Satellite Access

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Satellite information		1	SSC.1			SSC.1		
		2	SSC.2			SSC.2		
PDSCH RMC configuration		1, 2	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2	OP.1 defined in A.2.1			OP.1 defined in A.2.1		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		

Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-130			-130		
Pcompensation	dB	1, 2	0			0		
$Qhyst_s$	dB	1, 2	0			0		
$Qoffset_{s,n}$	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
$\hat{E}_s/I_{ot}$	dB	1, 2	16+TT	-3.11+TT	2.79+TT	-infinity	2.79+TT	-3.11+TT
N_{oc} Note2	dBm/SCS	1, 2	-98+TT					
N_{oc} Note2	dBm/15 kHz	1, 2	-98+TT					
$\hat{E}_s/N_{oc}$	dB	1, 2	16+TT	13+TT	16+TT	-infinity	16+TT	13+TT
SS-RSRP Note3	dBm/SCS	1, 2	-82+TT	-85+TT	-82+TT	-infinity	-82+TT	-85+TT
Io	dBm/9.36 MHz	1, 2	-53.94+TT	-52.21+TT	-52.21+TT	Same as parameters specified in Cell 1 columns-		
Treselection	s	1, 2	0+TT	0+TT	0+TT	0+TT	0+TT	0+TT
SintersearchP	dB	1, 2	60			60		
Propagation Condition		1, 2	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period [T2], to the moment when the UE camps again on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period [T3], to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate,\ NR_\ inter} + T_{SI\text{-}NR}$, and to a lower priority cell can be expressed as: $T_{evaluate,\ NR_\ inter} + T_{SI\text{-}NR}$,

Where:

$T_{higher_priority_search}$ See clause 4.2.2.7 in TS 38.133 [6].

$T_{evaluate,\ NR_\ inter}$ See Table 14.1.0.2-1 in clause 14.1.0.2

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell.

14.1.6 NR SA FR1-FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS
- Several test parameters and configuration are still in brackets

14.1.6.1 Test purpose

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 14.1.0.2.

14.1.6.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and enhanced RRM idle mode measurements in NTN bands.

14.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.1.6.

14.1.6.4 Test description

The test scenario comprises of 2 NR carriers and 2 cells as given in tables 14.1.6.4.1-1, 14.1.6.4.1-3 and 14.1.6.5-1. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively.

14.1.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.1.6.4.1-1.

Table 14.1.6.4.1-1: Supported test configurations for NR SA FR1-FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access

Configuration	Description
14.1.6-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.1.6-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.1.6.4.1-2

Table 14.1.6.4.1-2: Initial conditions for NR SA FR1-FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.1.6.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.1.6.4.1-3.
2. Message contents are defined in clause 14.1.6.4.3.
3. Cell 1 and Cell 2 are NR cells on two different carriers with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.1.6.4.1-3: General test parameters for NR SA FR1-FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell 1	
T2 end condition	Active cell		Cell 2	
	Neighbour cells		Cell 1	
Final condition	Active cell		Cell 1	
	Neighbour cells		Cell 2	
RF Channel Number			1,2	
Time offset between cells		ms	3	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration			SSB.1 FR1	
SMTC configuration#1			SMTC.2	Configured in SIB2 of Cell 1
			SMTC.6	Configured in SIB2 of Cell 2
SMTC configuration#2			SMTC.2	Configured in SIB2 of Cell 1
			SMTC.6	Configured in SIB2 of Cell 2
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			Not configured	
Ephemeris information			Note 1	
T1		s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.
Note 1: Detailed ephemeris information is provided in TS 38.508-1 [14]				

14.1.6.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD inter-frequency cells as given in table 14.1.2.4.1-3. Only Cell 1 is already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. The flag *enhancedMeasurementNGSO-r17* should be set.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5. Cell 1 is an active cell and Cell 2 is powered off.

2. Set the parameters according to T1 in Table 14.1.6.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for this iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.1.6.5-1. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within [FFS seconds] for GSO configurations or for NGSO configurations for UEs supporting measurement of only one LEO satellite in parallel within an SMTC, [or within FFS seconds for NGSO configurations for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC], from the beginning of time period T2, then count a success for the event “Re-select newly detected Cell 2”. Otherwise count a fail for the event “Re-select newly detected Cell 2”.

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 1.

7a The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 14.1.6.5-1. T3 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

10. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 3 seconds for GSO configurations or for NGSO configurations for UEs supporting measurement of only one LEO satellite in parallel within an SMTC, [or within FFS seconds for NGSO configurations for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC], from the beginning of time period T3, then count a success for the event “Re-select already detected Cell 1”. Otherwise count a fail for the event “Re-select already detected Cell 1”.

11. If the UE has re-selected to Cell 1 within T3, after the re-selection or when T3 expires, the SS shall send an *RRCRelease* message to the UE and then proceed with step 1 for the next iteration. Otherwise proceed with step 11a.

11a. The SS shall switch off and on the UE, and skip to step 1 for the next iteration.

12. Repeat step 2-11 until a test verdict has been achieved. Each of the events “Re-select newly detected Cell 2” and “Re-select already detected Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

14.1.6.4.3 Message contents

FFS

14.1.6.5 Test requirements

Table 14.1.6.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access.

Table 14.1.6.5-1: Cell specific parameters for NR SA FR1-FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3

Satellite information		SSC.1 for Config 1 SSC.2 for Config 2			SSC.1 for Config 1 SSC.2 for Config 2		
PDSCH RMC configuration		SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		OP.1 defined in A.2.1			OP.1 defined in A.2.1		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
RLM-RS		SSB			SSB		
Qrxlevmin	dBm/SCS	-130			-130		
Pcompensation	dB	0			0		
$Qhyst_s$	dB	0			0		
$Qoffset_{s,n}$	dB	0			0		
Cell_selection_and_reselection_quality_measurement		SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	16+TT	-3.11+TT	2.79+TT	-infinity	2.79+TT	-3.11+TT
N_{oc} Note2	dBm/SCS	-98+TT					
N_{oc} Note2	dBm/15 kHz	-98+TT					
$\hat{E}_s / N_{oc}$	dB	16+TT	13+TT	16+TT	-infinity	16+TT	13+TT
SS-RSRP Note3	dBm/SCS	-82+TT	-85+TT	-82+TT	-infinity	-82+TT	-85+TT
Io	dBm/9.36 MHz	-53.94+TT	-52.21+TT	-52.21+TT	Same as parameters specified in Cell 1 columns-		
Treselection	s	0+TT	0+TT	0+TT	0+TT	0+TT	0+TT
SintersearchP	dB	60			60		
Propagation Condition		AWGN					

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period [T3], to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 1.

The cell re-selection delay to a lower priority cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate,\ NR_\ inter} + T_{SI\text{-}NR}$,

Where:

$T_{evaluate,\ NR_\ inter}$ See Table 14.1.0.2-2 in clause 14.1.0.2

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

14.1.7 NR SA FR1-FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS

- Call setup and test procedure needs to be updated
- Several test parameters and configuration are still in brackets
- Annex E and F need to be updated

14.1.7.1 Test purpose

This test is to verify the requirement for the inter frequency NR cell reselection requirements for satellite access specified in clause 14.1.0.2.

14.1.7.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and time-based measurement initiation.

14.1.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.1.7.

14.1.7.4 Test description

The test scenario comprises of 1 NR carrier and 2 cells as given in tables 14.1.7.4.1-1, 14.1.7.4.1-3 and 14.1.7.5-1. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. t-Service broadcasted in SIB19 of Cell 1 is set to the time point that is 36s after start of T2.

14.1.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.1.7.4.1-1.

Table 14.1.7.4.1-1: Supported test configurations for NR SA FR1-FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access

Configuration	Description
14.1.7-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.1.7-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.1.7.4.1-2

Table 14.1.7.4.1-2: Initial conditions for NR SA FR1-FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.1.7.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

1. The general test parameter settings are set up according to Table 14.1.7.4.1-3.

2. Message contents are defined in clause 14.1.7.4.3.

3. Cell 1 and Cell 2 are NR cells with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.

4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.1.7.4.1-3: General test parameters for NR SA FR1-FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	
	Neighbour cells		1, 2	Cell1	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 ms	Asynchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	1, 2	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.

14.1.7.4.2 Test procedure

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

For NGSO configurations, the number of LEO satellites that a UE can measure in parallel within an SMTC is a capability the UE reports via *maxNumber-NGSO-SatellitesWithinOneSMTC-r17*. This value will determine the requirement to be used in the test, as well as the duration of T2.

1. Ensure the UE is in [state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5]. Cell 1 is an active cell and Cell 2 is powered off.

2. Set the parameters according to T1 in Table 14.1.7.5-1. Propagation conditions are set according to Annex C clause C.2.2. *T-Service* broadcasted in SIB19 of Cell 1 is set to the time point that is 36s after start of T2, according to Table 14.1.7.4.3-FFS (this timestamp indicates the UE when Cell 1 will stop providing service). T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for this iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.1.7.5-1. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within [36] seconds for GSO configurations or for NGSO configurations for UEs supporting measurement of only one LEO satellite in parallel within an SMTC, or within FFS seconds for NGSO configurations for UEs supporting measurement of

two or more LEO satellites in parallel within an SMTC, from the beginning of time period T2, then count a success for the test.

7. If the UE has re-selected to Cell 2 within T2, after the re-selection or when T2 expires, the SS shall send an *RRCRelease* message to the UE and then proceed with step 1 for the next iteration. Otherwise proceed with step 7a.

7a. The SS shall switch off and on the UE, and skip to step 1 for the next iteration.

8. Repeat step 2-7 until a test verdict has been achieved.

14.1.7.4.3 Message contents

FFS

14.1.7.5 Test requirements

Table 14.1.7.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access.

Table 14.1.7.5-1: Cell specific parameters for NR SA FR1-FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2		NSC.1 for Config 1 NSC.2 for Config 2	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		OP.1		OP.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
$Qhyst_s$	dB	0		0	
$Qoffset_{s,n}$	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	16+TT	-3.11+TT	-infinity	2.79+TT
N_{oc} Note2	dBm/SCS	-98+TT			
N_{oc} Note2	dBm/15 kHz	-98+TT			
$\hat{E}_s / N_{oc}$	dB	16+TT	13+TT	-infinity	16+TT
SS-RSRP Note3	dBm/SCS	-82+TT	-85+TT	-infinity	-82+TT
Io	dBm/9.36 MHz	-53.94+TT	-52.21+TT	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintersearchP	dB	40+TT		40+TT	
Propagation Condition		AWGN			

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a lower priority cell shall be less than [36] s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate,\ NR_\ inter} + T_{SI\text{-}NR}$,

Where:

$T_{evaluate,\ NR_\ inter}$ See Table 4.2C.2.4-1 in 38.133 [6] clause 4.2C.2.4

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 80ms period.

[In this test, SMTC.1 (period 20ms, duration 1ms, offset 0ms) is configured on both cells. Since only one SMTC is configured there is no chance for overlap, therefore according to clause 14.1.0.2, K_{multi_SMTC} = 1 for GEO, K_{multi_SMTC} = 1 for LEO for UEs supporting measurement of only one LEO satellite in parallel within an SMTC ($N_{LEO,simul} = 1$), and K_{multi_SMTC} = 2 for LEO for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC ($N_{LEO,simul} = \{2,3,4\}$).]

14.1.8 NR SA FR1-FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS
- Call setup and test procedure needs to be updated
- Several test parameters and configuration are still in brackets
- Annex E and F need to be updated

14.1.8.1 Test purpose

This test is to verify the requirement for the inter frequency NR cell reselection requirements for satellite access specified in clause 14.1.0.2.

14.1.8.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and location-based measurement initiation.

14.1.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.1.8.

14.1.8.4 Test description

The test scenario comprises of 1 NR carrier and 2 cells as given in tables 14.1.8.4.1-1, 14.1.8.4.1-3 and 14.1.8.5-1. The test consists of two successive time periods, with time duration of T1and T2, respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

At 4s after the start of T2, the UE location is changed such that the distance to the reference location broadcasted in SIB19 of Cell 1 is exceeded by the configured value in *distanceThresh* plus 50m.

14.1.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.1.8.4.1-1.

Table 14.1.8.4.1-1: Supported test configurations for NR SA FR1-FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access

Configuration	Description
14.1.8-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.1.8-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.1.8.4.1-2

Table 14.1.8.4.1-2: Initial conditions for NR SA FR1-FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.1.8.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

1. The general test parameter settings are set up according to Table 14.1.8.4.1-3.
2. Message contents are defined in clause 14.1.8.4.3.
3. Cell 1 and Cell 2 are NR cells with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.1.8.4.1-3: General test parameters for NR SA FR1-FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	
	Neighbour cells		1, 2	Cell1	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 ms	Asynchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	

T1	s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.

14.1.8.4.2 Test procedure

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

For NGSO configurations, the number of LEO satellites that a UE can measure in parallel within an SMTC is a capability the UE reports via *maxNumber-NGSO-SatellitesWithinOneSMTC-r17*. This value will determine the requirement to be used in the test, as well as the duration of T2.

1. Ensure the UE is in [state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5]. Cell 1 is an active cell and Cell 2 is powered off.
2. Set the parameters according to T1 in Table 14.1.8.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.
3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for this iteration of the test procedure loop.
4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.1.8.5-1. T2 starts.
5. After 4 seconds from the start of T2, the UE location is changed such that the distance to the reference location broadcasted in SIB19 of Cell 1 is exceeded by the configured value in *distanceThresh* plus 50m, according to Table 14.1.8.4.3-FFS.
6. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.
7. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within [36] seconds for GSO configurations or for NGSO configurations for UEs supporting measurement of only one LEO satellite in parallel within an SMTC, or within FFS seconds for NGSO configurations for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC, from the beginning of time period T2, then count a success for the test.
8. If the UE has re-selected to Cell 2 within T2, after the re-selection or when T2 expires, the SS shall send an *RRCRelease* message to the UE and then proceed with step 1 for the next iteration. Otherwise proceed with step 8a.

8a. The SS shall switch off and on the UE, and skip to step 1 for the next iteration.

9. Repeat step 2-8 until a test verdict has been achieved.

14.1.8.4.3 Message contents

FFS

14.1.8.5 Test requirements

Table 14.1.8.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access.

Table 14.1.8.5-1: Cell specific parameters for NR SA FR1-FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access

Parameter	Unit	Cell 1	Cell 2

		T1	T2	T1	T2
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2		NSC.1 for Config 1 NSC.2 for Config 2	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		OP.1		OP.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
$Qhyst_s$	dB	0		0	
$Qoffset_{s,n}$	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	16+TT	-3.11+TT	-infinity	2.79+TT
N_{oc} Note2	dBm/SCS	-98+TT			
N_{oc} Note2	dBm/15 kHz	-98+TT			
$\hat{E}_s/N_{oc}$	dB	16+TT	13+TT	-infinity	16+TT
SS-RSRP Note3	dBm/SCS	-82+TT	-85+TT	-infinity	-82+TT
Io	dBm/9.36 MHz	-53.94+TT	-52.21+TT	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintersearchP	dB	40+TT		40+TT	
Propagation Condition		AWGN			

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a lower priority cell shall be less than [36] s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate,\ NR_\ inter} + T_{SI\text{-}NR}$,

Where:

$T_{evaluate,\ NR_\ inter}$ See Table 4.2C.2.4-1 in 38.133 [6] clause 4.2C.2.4

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 80ms period.

[In this test, SMTC.1 (period 20ms, duration 1ms, offset 0ms) is configured on both cells. Since only one SMTC is configured there is no chance for overlap, therefore according to clause 14.1.0.1, K_{multi_SMTC} = 1 for GEO, K_{multi_SMTC} = 1 for LEO for UEs supporting measurement of only one LEO satellite in parallel within an SMTC ($N_{LEO,simul} = 1$), and K_{multi_SMTC} = 2 for LEO for UEs supporting measurement of two or more LEO satellites in parallel within an SMTC ($N_{LEO,simul} = \{2,3,4\}$).]

14.1.9 NR SA FR1-FR1 Cell reselection for UE fulfilling low mobility relaxed measurement criterion for Satellite Access

14.1.9.1 Test purpose

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 7.1.1.0.4, for UE fulfilling low mobility relaxed measurement criterion.

14.1.9.2 Test applicability

This test applies to all types of NR UE release 17 and forward satellite access and relaxed RRM idle mode measurements in NTN bands.

14.1.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.1.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.14.1.9.

14.1.9.4 Test description

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables 14.1.9.4.1-1, 14.1.9.4.1-3 and 14.1.9.5-1. The test consists of two successive time periods, with time duration of T1 and T2 respectively

14.1.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.1.9.4.1-1.

Table 14.1.9.4.1-1: Supported test configurations for NR SA FR1-FR1 Cell reselection for UE fulfilling low mobility relaxed measurement criterion for Satellite Access

Configuration	Description
14.1.9-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.1.9-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 14.1.9.4.1-2

Table 14.1.9.4.1-2: Initial conditions for NR SA FR1-FR1 Cell reselection for UE fulfilling low mobility relaxed measurement criterion for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.1.9.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

1. The general test parameter settings are set up according to Table 14.1.9.4.1-3.
2. Message contents are defined in clause 14.1.9.4.3.
3. Cell 1 and Cell 2 are NR cells with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.1.9.4.1-3: General test parameters for NR SA FR1-FR1 Cell reselection for UE fulfilling low mobility relaxed measurement criterion for Satellite Access

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell 2	The UE camps on Cell 2 in the initial phase, it fulfills Low Mobility relaxation measurements criterion, and during T1 period the UE reselects to Cell 1
	Neighbour cells		1, 2	Cell 1	
T1 end condition	Active cell		1, 2	Cell 1	The UE shall perform reselection to Cell 1 during T1
	Neighbour cells		1, 2	Cell 2	
T2 end condition	Active cell		1, 2	Cell 2	The UE shall perform reselection to Cell 2 with higher priority during T2
	Neighbour cells		1, 2	Cell 1	
RF Channel Number			1, 2	1, 2	
Time offset between cells		ms	1, 2	3	Asynchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB Configuration			1, 2	SSB.1 FR1	
SMTC configuration			1, 2	SMTC pattern 2	Configured in SIB4 of Cell 1
				SMTC pattern 6	Configured in SIB4 of Cell 2
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
Ephemeris information				Note 1	
T1		s	1, 2	25	T1 is defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2	25	T2 is defined so that cell re-selection reaction time is taken into account.
Note 1: Detailed ephemeris information is provided in TS 38.508-1 [14]					

14.1.9.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD inter-frequency cells on two different NR carriers as given in table 14.1.9.4.1-3. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

The UE is configured with the relaxed measurement criterion for UE with low mobility defined in TS 38.304 [30] clause 5.2.4.9.1. So, Cell 2 and Cell 1 configure the UE as follows:

lowMobilityEvalutation [13] criterion is configured according to the parameters listed in Table 14.1.9.5-1;

cellEdgeEvaluation [13] criterion is not configured;

combineRelaxedMeasCondition [13] is not configured;

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5. Cell 2 is the active cell and Cell 1 is the neighbor cell.

1a. Set the parameters according to T2 in Table 14.1.9.5-1. SS waits at least for 32sec (T_{detect,NR_Inter}) to ensure the UE can detect NR neighbor cell (Cell 1).

2. Set the parameters according to T1 in Table 14.1.9.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. If the UE responds on Cell 1 during time duration T1 within 17 seconds, from the beginning of time period T1, then count a success for the test.

4. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 4a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 1.

4a The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

5. The SS shall switch the power setting from T1 to T2 as specified in Table 14.1.9.5-1. T2 starts.

6. The SS waits for random access requests information from the UE to perform cell re-selection to an already identified cell, Cell 2.

7. If the UE responds on Cell 2 during time duration T2 within 17 seconds, from the beginning of time period T2, then count a success for the test.

8. If the UE has re-selected to Cell 2 within T2, after the re-selection or when T2 expires, the SS shall send an *RRCRelease* message to the UE and then proceed with step 1 for the next iteration. Otherwise proceed with step 8a.

8a. The SS shall switch off and on the UE, and skip to step 1 for the next iteration.

9. Repeat step 1a-8 until a test verdict has been achieved. Each of the events “Re-select already detected lower priority Cell 1” and “Re-select already detected higher priority Cell 2” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

14.1.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.1.9.4.3-1: SIB1 (Cell 1 and Cell 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
servingCellConfigCommon SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
pcch-Config SEQUENCE {			
defaultPagingCycle	rf64		
}			
}			
}			
}			

Table 14.1.9.4.3-2: SIB2 (Cell 1)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
threshServingLowP	22	Actual value = 22*2 = 44dB	
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16 SEQUENCE {			
s-SearchDeltaP-r16	dB3		
t-SearchDeltaP-r16	s5		
}			

cellEdgeEvaluation-r16	Not present		
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 14.1.9.4.3-3: SIB2 (Cell 2)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
threshServingLowP	23	Actual value = 23*2 = 46dB	
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16 SEQUENCE {			
s-SearchDeltaP-r16	dB15		
t-SearchDeltaP-r16	s5		
}			
cellEdgeEvaluation-r16	Not present		
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 14.1.9.4.3-4: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 2		
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		
deriveSSB-IndexFromCell	false		
threshX-HighP	22	Actual value = 22*2 = 44dB	
threshX-LowP	25	Actual value = 25*2 = 50dB	
cellReselectionPriority	5	Same as the priority in SIB 2 of Cell 2.	
}			
}			
}			

Table 14.1.9.4.3-5: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 1 SSB		

smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.6		
deriveSSB-IndexFromCell	false		
threshX-HighP	24	Actual value = 24*2 = 48dB	
threshX-LowP	24	Actual value = 24*2 = 48dB	
cellReselectionPriority	4	Same as the priority in SIB 2 of Cell 1.	
}			
}			
}			

14.1.9.5 Test requirements

Table 14.1.9.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 Cell reselection for UE fulfilling low mobility relaxed measurement criterion for Satellite Access.

Table 14.1.9.5-1: Cell specific parameters for NR SA FR1-FR1 Cell reselection for UE fulfilling low mobility relaxed measurement criterion for Satellite Access

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		1, 2	OP.1 defined in A.2.1		OP.1 defined in A.2.1	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s,n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	1, 2	14	14	-3.70	9.75
N_{oc} Note2	dBm/SCS	1, 2	-98			
N_{oc} Note2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/N_{oc}$	dB	1, 2	14	14	-3.70	9.75
SS-RSRP Note3	dBm/SCS	1, 2	-84	-84	-101.70	-88.25
Io	dBm/9.36 MHz	1, 2	-55.88	-55.88	-68.51	-59.86
Treselection	s	1, 2	0	0	0	0
SnonintersearchP	dB	1, 2	Not sent		Not sent	
$Thresh_{x,highP}$	dB	1, 2	48		44	
$Thresh_{serving,lowP}$	dB	1, 2	44		46	
$Thresh_{x,lowP}$	dB	1, 2	48		50	
$S_{SearchDeltaP}$	dB	1, 2	3		3	
$T_{SearchDeltaP}$	s	1, 2	5		5	
Propagation Condition		1, 2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell reselection delay to an already detected lower priority cell for UE fulfilling low mobility relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to a lower priority cell for UE fulfilling low mobility relaxed measurements shall be less than 17s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling low mobility relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling low mobility relaxed measurements shall be less than 17s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a known lower priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$,

Where:

$T_{evaluate, NR_ inter}$ See Table 4.2.2.10.2-1 in TS 38.133 [6] clause 4.2.2.10.2

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64s, allow 17s for the cell re-selection delay to an already detected lower priority cell and 16.64s for the cell re-selection delay to an already detected higher priority cell, which we allow 17s for UE fulfilling low mobility relaxed measurements in the test case.

14.1.10 NR SA FR1-FR1 Cell reselection for UE fulfilling not-at-cell edge relaxed measurement criterion for Satellite Access

14.1.10.1 Test purpose

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 7.1.1.0.4, for UE fulfilling low mobility relaxed measurement criterion.

14.1.10.2 Test applicability

This test applies to all types of NR UE release 17 and forward satellite access and relaxed RRM idle mode measurements in NTN bands.

14.1.10.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 7.1.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.14.1.10.

14.1.10.4 Test description

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables 14.1.10.4.1-1, 14.1.10.4.1-3 and 14.1.10.5-1. The test consists of two successive time periods, with time duration of T1 and T2 respectively

14.1.10.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.1.10.4.1-1.

Table 14.1.10.4.1-1: Supported test configurations for NR SA FR1-FR1 Cell reselection for UE fulfilling not-at-cell edge relaxed measurement criterion for Satellite Access

Configuration	Description
14.1.10-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.1.10-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 14.1.10.4.1-2

Table 14.1.10.4.1-2: Initial conditions for NR SA FR1-FR1 Cell reselection for UE fulfilling not-at-cell edge relaxed measurement criterion for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.1.10.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

1. The general test parameter settings are set up according to Table 14.1.10.4.1-3.
2. Message contents are defined in clause 14.1.10.4.3.
3. Cell 1 and Cell 2 are NR cells with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.1.10.4.1-3: General test parameters for NR SA FR1-FR1 Cell reselection for UE fulfilling not-at-cell edge relaxed measurement criterion for Satellite Access

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell 2	The UE camps on Cell 2 in the initial phase, it fulfills Not-at-cell edge relaxation measurements criterion, and during T1 period the UE reselects to Cell 1
	Neighbour cells		1, 2	Cell 1	
T1 end condition	Active cell		1, 2	Cell 1	The UE shall perform reselection to Cell 1 during T1
	Neighbour cells		1, 2	Cell 2	
T2 end condition	Active cell		1, 2	Cell 2	The UE shall perform reselection to Cell 2 with higher priority during T2
	Neighbour cells		1, 2	Cell 1	
RF Channel Number			1, 2	1, 2	
Time offset between cells		ms	1, 2	3	Asynchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB Configuration			1, 2	SSB.1 FR1	
SMTC configuration			1, 2	SMTC pattern 2	Configured in SIB4 of Cell 1
				SMTC pattern 6	Configured in SIB4 of Cell 2
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 [7] clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
Ephemeris information				Note 1	
T1		s	1, 2	20	T1 is defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2	20	T2 is defined so that cell re-selection reaction time is taken into account.
Note 1: Detailed ephemeris information is provided in TS 38.508-1 [14]					

14.1.10.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD inter-frequency cells on two different NR carriers as given in table 14.1.10.4.1-3. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

The UE is configured with the relaxed measurement criterion for UE not-at-cell edge as defined in TS38.304 [30] clause 5.2.4.9.2 in [30]. So, Cell 2 and Cell 1configures the UE as follows:

cellEdgeEvaluation [13] criterion is configured according to the parameters listed in Table 14.1.9.2-3;

lowMobilityEvalutation [13] criterion is not configured;

combineRelaxedMeasCondition [13] is not configured;

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR and Test Mode On according to TS 38.508-1 [14] clause 4.5. Cell 2 is the active cell and Cell 1 is the neighbor cell.

1a. Set the parameters according to T2 in Table 14.1.10.5-1. SS waits at least for 32sec (T_{detect,NR_Inter}) to ensure the UE can detect NR neighbor cell (Cell 1).

2. Set the parameters according to T1 in Table 14.1.10.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.

3. If the UE responds on Cell 1 during time duration T1, within 17 seconds from the beginning of time period T1, then count a success for the test.

4. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 4a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 1.

4a The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

5. The SS shall switch the power setting from T1 to T2 as specified in Table 14.1.10.5-1. T2 starts.

6. The SS waits for random access requests information from the UE to perform cell re-selection to an already identified cell, Cell 2.

7. If the UE responds on Cell 2 during time duration T2 within 17 seconds, from the beginning of time period T2, then count a success for the test.

8. If the UE has re-selected to Cell 2 within T2, after the re-selection or when T2 expires, the SS shall send an *RRCRelease* message to the UE and then proceed with step 1 for the next iteration. Otherwise proceed with step 8a.

8a. The SS shall switch off and on the UE, and skip to step 1 for the next iteration.

9. Repeat steps 1a-8 until a test verdict has been achieved. Each of the events “Re-select already detected lower priority Cell 1” and “Re-select already detected higher priority Cell 2” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

14.1.10.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.1.10.4.3-1: SIB1 (Cell 1 and Cell 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**

SIB1 ::= SEQUENCE {			
servingCellConfigCommon SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
pcch-Config SEQUENCE {			
defaultPagingCycle	rf64		
}			
}			
}			
}			

Table 14.1.10.4.3-2: SIB2 (Cell 1)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16	Not present		
cellEdgeEvaluation-r16 SEQUENCE {	Not present		
s-SearchThresholdP-r16	25	Actual value = 25*2 = 50dB	
s-SearchThresholdQ-r16	Not present		
}			
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 14.1.10.4.3-3: SIB2 (Cell 2)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
}			
relaxedMeasurement-r16 SEQUENCE {			
lowMobilityEvaluation-r16	Not present		
cellEdgeEvaluation-r16 SEQUENCE {	Not present		
s-SearchThresholdP-r16	17	Actual value = 17*2 = 34dB	
s-SearchThresholdQ-r16	Not present		
}			
combineRelaxedMeasCondition-r16	Not present		
highPriorityMeasRelax-r16	Not present		
}			
}			

Table 14.1.10.4.3-4: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 2 SSB		
smtc	SSB-MTC specified in 38.508-1 [14] Table		

	7.3.1-3 with condition SMTC.2		
deriveSSB-IndexFromCell	false		
cellReselectionPriority	5	Same as the priority in SIB 2 of Cell 2.	
}			
}			
}			

Table 14.1.10.4.3-5: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 1 SSB		
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.6		
deriveSSB-IndexFromCell	false		
cellReselectionPriority	4	Same as the priority in SIB 2 of Cell 1.	
}			
}			
}			

14.1.10.5 Test requirements

Table 14.1.10.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 Cell reselection for UE fulfilling not-at-cell edge relaxed measurement criterion for Satellite Access.

Table 14.1.10.5-1: Cell specific parameters for NR SA FR1-FR1 Cell reselection for UE fulfilling not-at-cell edge relaxed measurement criterion for Satellite Access

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		1, 2	OP.1 defined in A.2.1		OP.1 defined in A.2.1	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s,n}$	dB	1, 2	0		0	

Cell_selection_and_ reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1, 2	16	14	-3.65	16
N_{oc} Note2	dBm/SCS	1, 2	-98	-98	-100	-100
N_{oc} Note2	dBm/15 kHz	1, 2	-98	-98	-100	-100
$\hat{E}_s / N_{oc}$	dB	1, 2	16	14	-3.65	16
SS-RSRP Note3	dBm/SCS	1, 2	-82	-84	-103.65	-84
Io	dBm/9.36 MHz	1, 2	-53.94	-55.88	-70.49	-55.94
Treselection	s	1, 2	0	0	0	0
SnonintersearchP	dB	1, 2	Not sent		Not sent	
$Thresh_{x, highP}$	dB	1, 2	48		48	
$Thresh_{serving, lowP}$	dB	1, 2	44		44	
$Thresh_{x, lowP}$	dB	1, 2	50		50	
$S_{SearchThresholdP}$	dB	1, 2	50		34	
$S_{SearchThresholdQ}$	s	1, 2	Not Configured			
Propagation Condition		1, 2	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell reselection delay to an already detected lower priority cell for UE fulfilling not-at-cell edge relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected lower priority cell for UE fulfilling not-at-cell edge relaxed measurements shall be less than 17s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling not-at-cell-edge relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling not-at-cell-edge relaxed measurements shall be less than 17s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, NR_ inter} + T_{SI-NR}$,

Where:

$T_{evaluate, NR_ inter}$ See Table 4.2.2.10.3-1 in TS 38.133 [6] clause 4.2.2.10

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64s, allow 17s for the cell re-selection delay to an already detected lower priority cell and 16.64s for the cell re-selection delay to an already higher priority cell, which we allow 17s for UE fulfilling not-at-cell edge relaxed measurements in the test case.

14.2 RRC_CONNECTED state mobility

14.2.1 Handover for SAN

14.2.1.0 Minimum conformance requirements

14.2.1.0.1 Minimum conformance requirements for handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR SAN FR1 cell to NR SAN FR1 cell. The requirements in this clause apply provided that UE has the valid and applicable parameters of ephemeris information, common TA, DL and UL Polarization information, K_{offset}, and K_{mac} for target NR SAN cell during $D_{handover}$, otherwise interruption time may be longer than the requirements in this clause.

The normative reference for this requirement is TS 38.133 [6] clause 6.1C.1.2.

14.2.1.0.1.1 Handover delay

When the UE receives a RRC message implying handover to NR SAN cell, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ msec from the end of the last TTI containing the RRC command.

Where:

- $D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [13] plus the interruption time stated in clause 14.2.1.0.1.2.

The normative reference for this requirement is TS 38.133 [6] clause 6.1C.1.2.1

14.2.1.0.1.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover to NR SAN cell is commanded,

the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}\ \text{ms}$$

Otherwise, no interruption time requirement is applied.

Where:

- T_{search} is the time required to search the target NR SAN cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot $\geq$ -2 dB, then $T_{search} = T_{rs}$ ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot $\geq$ -2 dB, then $T_{search} = 3 * T_{rs}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.
- T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.
- $T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.
- T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.
- T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and [10] ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [8].
- T_{rs} is the SMTC periodicity of the target NR SAN cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission

periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [13] signalling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in 38.133 [6] clause 9.2.5 for intra-frequency handover and 38.133 [6] clause 9.3.4 for inter-frequency handover.

The normative reference for this requirement is TS 38.133 [6] clause 6.1C.1.2.2

14.2.1.0.2 Minimum conformance requirements for conditional handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency conditional handover from NR SAN FR1 cell to NR SAN FR1 cell. The requirements in this clause apply provided that UE has the valid and applicable parameters of ephemeris information, common TA, DL and UL Polarization information, K_{offset}, and K_{mac} for target NR SAN cell during D_{CHO}, otherwise the measurement time, preparation time and interruption time may be longer than the requirements in clauses 14.2.1.0.2.2, 14.2.1.0.2.3 and 14.2.1.0.2.4.

The normative reference for this requirement is TS 38.133 [6] clause 6.1C.2.2.

14.2.1.0.2.1 Handover delay

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [13]. UE shall start RRM measurement before the time or distance condition is met, the time/distance condition is defined in clause 5.5.4 in TS 38.331[13]

When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{CHO} seconds from the end of the last TTI containing the RRC command.

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

Where:

- T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [13].
- T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover
- $T_{measure}$ is the measurements time stated in clause 14.2.1.0.2.2.
- $T_{CHO_execution}$ is the UE conditional execution preparation time for conditional handover in clause 14.2.1.0.2.3.
- $T_{interrupt}$ is the interruption time stated in clause 14.2.1.0.2.4.

The conditional handover delay requirements are applied if condition T1-2 is later than the end of $T_{measure}$ for time based CHO, or both condition D1-1 and condition D1-2 are fulfilled before the end of $T_{measure}$ for location-based CHO, otherwise no CHO requirement is applied.

The normative reference for this requirement is TS 38.133 [6] clause 6.1C.2.2.1.

14.2.1.0.2.2 Measurement time

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a handover to a target cell and interruption time starts.

For intra-frequency handover, the requirements for identifying a new detectable intra frequency cell measured without Time To Trigger (TTT) and L3 filtering, $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$, defined in 38.133 [6] clauses 9.2C.5.1 and 9.2C.6.1 are used.

For time-based conditional intra-frequency handover:

- If condition T1-1 occurs earlier than $T_{Event_DU} + T_{identify_intra_with_index}$ or $T_{Event_DU} + T_{identify_intra_without_index}$, then the measurement time delay equal to $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$ assuming UE only performs the measurements within SMTC window of the target cell.

- If condition T1-1 occurs later than $T_{Event_DU} + T_{identify_intra_with_index}$ or $T_{Event_DU} + T_{identify_intra_without_index}$, then the measurement time delay equals to the time from the end of T_{event_DU} until condition T1-1.

For location-based conditional intra-frequency handover:

- If both condition D1-1 and condition D1-2 are fulfilled earlier than $T_{Event_DU} + T_{identify_intra_with_index}$ or $T_{Event_DU} + T_{identify_intra_without_index}$, then the measurement time delay equal to $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$ assuming UE only performs measurements within SMTC window of the target cell.

- If both condition D1-1 and condition D1-2 are fulfilled is later than T_{Event_DU} plus $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$ for intra-frequency handover, then the measurement time delay equal to the time from the end of T_{event_DU} until time when both condition D1-1 and condition D1-2 are fulfilled.

For inter-frequency handover, the requirements for identifying a new detectable inter frequency cell measured without Time To Trigger (TTT) and L3 filtering, $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$, defined in 38.133 [6] clause 9.3C.7.1 are used.

For time-based conditional inter-frequency handover:

- If condition T1-1 occurs earlier than $T_{Event_DU} + T_{identify_inter_with_index}$ or $T_{Event_DU} + T_{identify_inter_without_index}$, then the measurement time delay equal to $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$ assuming that the UE uses only the SMTC window of the target inter-frequency carrier for performing the measurements. In this case $K_{satellite}=1$, $CSSF_{inter}=1$.

- If condition T1-1 occurs later than $T_{Event_DU} + T_{identify_inter_with_index}$ or $T_{Event_DU} + T_{identify_inter_without_index}$, then the measurement time delay equals to the time from the end of T_{event_DU} until condition T1-1.

For location-based conditional inter-frequency handover,

- If both condition D1-1 and condition D1-2 are fulfilled earlier than $T_{Event_DU} + T_{identify_inter_with_index}$ or $T_{Event_DU} + T_{identify_inter_without_index}$, then the measurement time delay equal to $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$, assuming that the UE uses only the SMTC window of the target inter-frequency carrier for performing the measurements. In this case $K_{satellite=}1$, $CSSF_{inter}=1$.

- If both condition D1-1 and condition D1-2 are fulfilled later than T_{Event_DU} plus $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$, then the measurement time delay equal to the time from the end of T_{event_DU} until time of both condition D1-1 and condition D1-2 are fulfilled.

When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period [$T_{identify_intra_without_index}$] or [$T_{identify_intra_with_index}$] for intra-frequency handover or [$T_{identify_inter_without_index}$] for inter-frequency handover.

The normative reference for this requirement is TS 38.133 [6] clause 6.1C.2.2.2.

14.2.1.0.2.3 Preparation time

$T_{CHO_execution}$ is the UE execution preparation time for conditional handover and starts after UE realizes the condition of CHO is met and identity of the target cell is determined. $T_{CHO_execution}$ can be up to 10ms.

The normative reference for this requirement is TS 38.133 [6] clause 6.1C.2.2.3.

14.2.1.0.2.4 Interruption time

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional handover, the measurment time shall be less than

$$T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

- $T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

- T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and [10] ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [8]

- T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

- T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

- T_{rs} is the SMTC periodicity of the target NR SAN cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [13] signalling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

The normative reference for this requirement is TS 38.133 [6] clause 6.1C.2.2.4.

14.2.1.1 NR SA FR1 Handover for Satellite Access

Editor's Note: This test is incomplete in the following aspects:

- Several test parameters and configuration are still in brackets

- AT command related configuration is FFS

14.2.1.1.1 Test purpose

To verify the requirement for Intra-frequency SAN Handover from FR1 to FR1 specified in clause 14.2.1.0.1.

14.2.1.1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.2.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.2.1.1.

14.2.1.1.4 Test description

14.2.1.1.4.1 Initial conditions

The test scenario comprises of one NR carrier and two satellite access cells as given in tables 14.2.1.1.4.1-3 and 14.2.1.1.5-1. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. During T1, the UE is configured to measure intra-frequency neighbour cell with Event A3 report.

Starting T2, Cell 2 becomes detectable and offset better than Cell 1. The RRC message implying handover to Cell 2 shall be sent to the UE during period T2, after the UE has reported Event A3. The start of T3 is defined as the end of the last TTI containing the RRC message implying handover.

This test shall be tested using any of the test configurations in Table 14.2.1.1.4.1-1.

Table 14.2.1.1.4.1-1: Supported test configurations for NR SA FR1 Handover for Satellite Access

Configuration	Description
14.2.1.1-1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
14.2.1.1-2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW

Note:	If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.

Configure the test equipment and the DUT according to the parameters in Table 14.2.1.1.4.1-2

Table 14.2.1.1.4.1-2: Initial conditions for NR SA FR1 Handover for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.2.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.2.1.1.4.3.
2. Cell 1 and Cell 2 are NR FR1 cells with the power levels set according to clauses C.1.2 and C.1.3 for this test where Cell 2 is the target cell. Both Cell 1 and Cell 2 are satellite access cells.
3. The general test parameters are given in Table 14.2.1.1.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.2.1.1.4.1-3: General test parameters for NR SA FR1 Handover for Satellite Access

Parameter		Unit	Value	Comment
RF Channel Number			1	One NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellites configuration
	Config 2		RMC in [A.x]	For NGSO satellites configuration
UE position (N,S, H)			[(0, 0, 0)]	Set by AT command
A3-Offset		dB	-1	Modified by Test Tolerance
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

14.2.1.1.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD intra-frequency cells as given in table 14.2.1.1.4.1-3. The handover delay is tested.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.
2. Set the parameters according to T1 in Table 14.2.1.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.
3. SS shall transmit an *RRCReconfiguration* message, configuring measurement object.

4. UE shall transmit *RRCReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.2.1.1.5-1.
6. UE shall transmit a *MeasurementReport* message triggered by Event A3.
7. SS shall transmit the *RRCReconfiguration* message implying handover to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 14.2.1.1.5-1. T3 starts.
8. If the UE transmits the uplink PRACH channel to Cell 2 less than 72 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
9. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.
10. After T3 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
11. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
12. Once the connection is released, the SS shall switch off and then on the UE and then proceed with step 1.
13. Repeat steps 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.2.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 14.2.1.1.4.3-1: Common Exception messages for NR SA FR1 Handover for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 1 and Synchronous cells Table H.3.1-4 with A3-offset = -1 dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.2-2 with Condition RBConfig_KeyChange

14.2.1.1.5 Test requirements

Table 14.2.1.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 Handover for Satellite Access.

Table 14.2.1.1.5-1: Cell specific test parameters for NR SA FR1 Handover for Satellite Access

Parameter	Test configuration	Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number	Config 1,2		1			1		
$BW_{channel}$		MHz	10: $N_{RB,c}$ = 52			10: $N_{RB,c}$ = 52		
BWP BW		MHz	10: $N_{RB,c}$ = 52			10: $N_{RB,c}$ = 52		
TA_{Common}	Config 1,2	s	0			0		
$TA_{CommonDrift}$		s	0			0		
$TA_{CommonDriftVariation}$		s	0			0		
K_{offset}	Config 1	ms	[239]			[239]		
	Config 2		[4]			[4]		
K_{mac}	Config 1,2	ms	0			0		
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel			SR.1.1 FDD					

CORESET Reference Channel				CR.1.1 FDD					
TRS configuration				TRS.1.1 FDD					
OCNG Patterns				OP.1					
SMTC Configuration				SMTC.1					
SSB Configuration				SSB.1 FR1					
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz					
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz					
PRACH configuration				FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP	Config 1,2		DLBWP.0.1					
	Dedicated DL BWP			DLBWP.1.1					
	Initial UL BWP			ULBWP.0.1					
	Dedicated UL BWP			ULBWP.1.1					
EPRE ratio of PSS to SSS		Config 1,2	dB	0					
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		Config 1,2	dBm/ 15kHz	-98					
N_{oc} Note2			dBm/ SCS	-98					
$\hat{E}_s / I_{ot}$			dB	8	-2.41	-2.41	-Infinity	1.36	1.36
$\hat{E}_s / N_{oc}$			dB	8	8	8	-Infinity	10	10
SSB_RP			dBm/ SCS	-90	-90	-90	-Infinity	-88	-88
Io Note3			dBm/ 9.36MHz	-61.41	-57.67	-57.67	-61.41	-57.67	-57.67
Propagation condition			-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [13]. $T_{interrupt}$ is defined in clause 14.2.1.0.1.2.

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Here: $T_{search} = 0$; $T_{IU} = 20$ms; $T_{processing} = 20$ms; $T_{\Delta} = 20$ms; $T_{margin} = 2$ms.

This gives a total of 72 ms.

14.2.1.2 NR SA FR1-FR1 Handover for Satellite Access

Editor's Note: This test is incomplete in the following aspects:

- Several test parameters and configuration are still in brackets
- AT command related configuration is FFS
- Needs alignment with latest changes introduced in 38.133 (gap, SMTC, SSB configurations)
- Neighbour cell ephemeris needs further analysis

14.2.1.2.1 Test purpose

To verify the requirement for Inter-frequency SAN Handover from FR1 to FR1 specified in clause 14.2.1.0.1.

14.2.1.2.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.2.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.2.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.2.1.2.

14.2.1.2.4 Test description

14.2.1.2.4.1 Initial conditions

The test scenario comprises of two NR carriers and two satellite access cells as given in tables 14.2.1.2.4.1-3 and 14.2.1.2.5-1. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. During T1, the UE is configured to measure inter frequency neighbour cell with Event A3 report and a gap patterns are configured in the test case.

Starting T2, Cell 2 becomes detectable and offset better than Cell 1. The RRC message implying handover to Cell 2 shall be sent to the UE during period T2, after the UE has reported Event A3. The start of T3 is defined as the end of the last TTI containing the RRC message implying handover.

This test shall be tested using any of the test configurations in Table 14.2.1.2.4.1-1.

Table 14.2.1.2.4.1-1: Supported test configurations for NR SA FR1-FR1 Handover for Satellite Access

Configuration	Description
14.2.1.2-1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
14.2.1.2-2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Configure the test equipment and the DUT according to the parameters in Table 14.2.1.2.4.1-2

Table 14.2.1.2.4.1-2: Initial conditions for NR SA FR1-FR1 Handover for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.2.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.2.1.2.4.3.
2. Cell 1 and Cell 2 are NR FR1 cells with the power levels set according to clauses C.1.2 and C.1.3 for this test where Cell 2 is the target cell. Both Cell 1 and Cell 2 are satellite access cells.
3. The general test parameters are given in Table 14.2.1.2.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.2.1.2.4.1-3: General test parameters for NR SA FR1-FR1 Handover for Satellite Access

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H)			[(0, 0, 0)]	Set by AT command
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

14.2.1.2.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD inter-frequency cells as given in table 14.2.1.2.4.1-3. The handover delay is tested.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.
2. Set the parameters according to T1 in Table 14.2.1.2.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.
3. SS shall transmit an *RRCReconfiguration* message, configuring measurement object.
4. UE shall transmit *RRCReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.2.1.2.5-1.
6. UE shall transmit a *MeasurementReport* message triggered by Event A3.
7. SS shall transmit the *RRCReconfiguration* message implying handover to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 14.2.1.2.5-1. T3 starts.
8. If the UE transmits the uplink PRACH channel to Cell 2 less than 72 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
9. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.
10. After T3 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
11. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

12. Once the connection is released, the SS shall switch off and then on the UE and then proceed with step 1.

13. Repeat steps 2-12 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.2.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 14.2.1.2.4.3-1: Common Exception messages for NR SA FR1-FR1 Handover for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO, SSB.1 FR1, SMTC pattern 1 and Synchronous cells Table H.3.1-4 with A3-offset = 0 dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table H.3.2-2 with Condition RBConfig_KeyChange

14.2.1.2.5 Test requirements

Table 14.2.1.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 Handover for Satellite Access.

Table 14.2.1.2.5-1: Cell specific test parameters for NR SA FR1-FR1 Handover for Satellite Access

Parameter		Test configuration	Unit	Cell 1			Cell 2		
				T1	T2	T3	T1	T2	T3
NR RF Channel Number		Config 1,2		1			2		
$BW_{channel}$			MHz	10: $N_{RB,c}$ = 52			10: $N_{RB,c}$ = 52		
BWP BW			MHz	10: $N_{RB,c}$ = 52			10: $N_{RB,c}$ = 52		
TA_{Common}		Config 1,2	s	0			0		
$TA_{CommonDrift}$			s	0			0		
$TA_{CommonDriftVariation}$			s	0			0		
K_{offset}		Config 1	ms	[239]			[239]		
		Config 2		[4]			[4]		
K_{mac}		Config 1,2	ms	0			0		
DRx Cycle			ms	Not Applicable					
PDSCH Reference measurement channel				SR.1.1 FDD					
CORESET Reference Channel				CR.1.1 FDD					
TRS configuration				TRS.1.1 FDD					
OCNG Patterns				OP.1					
SMTC Configuration				SMTC.1					
SSB Configuration				SSB.1 FR1					
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz					
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz					
PRACH configuration				FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP	Config 1,2		DLBWP.0.1					
	Dedicated DL BWP			DLBWP.1.1					
	Initial UL BWP			ULBWP.0.1					
	Dedicated UL BWP			ULBWP.1.1					
EPRE ratio of PSS to SSS		Config 1,2	dB	0					
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									

EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2	dBm/ 15kHz	-98					
N_{oc} Note2		dBm/ SCS	-98					
$\hat{E}_s / I_{ot}$		dB	4	4	4	-Infinity	9	9
$\hat{E}_s / N_{oc}$		dB	4	4	4	-Infinity	9	9
SSB_RP		dBm/ SCS	-94	-94	-94	-Infinity	-89	-89
Io Note3		dBm/ 9.36MHz	-64.59	-64.59	-64.59	-70.05	-60.53	-60.53
Propagation condition		-	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [13]. $T_{interrupt}$ is defined in clause 14.2.1.0.1.2.

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}\ \text{ms}$$

Here: T_{search} = 0; T_{IU} = 20ms; $T_{processing}$ = 20ms; T_{Δ} = 20ms; T_{margin} = 2ms.

This gives a total of 72 ms.

14.2.1.3 NR SA FR1 Time-based Conditional Handover for Satellite Access

Editor's Note:

- Several test parameters and configuration are still in brackets
- AT command related configuration is FFS

14.2.1.3.1 Test purpose

This test is to verify the requirement for intra-frequency SAN time-based conditional handover from FR1 to FR1 specified in clause 14.2.1.0.2.

14.2.1.3.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and time-based conditional handover.

14.2.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.2.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.2.1.3.

14.2.1.3.4 Test description

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. Immediately before the start of T1, the UE is configured to measure intra-frequency neighbour cell and with a time-based handover trigger to Cell 2 with Event *CondEvent* T1.

Starting T2, Cell 2 becomes detectable and offset better than Cell 1 and time condition event *t1-Threshold-r17* is fulfilled.

14.2.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.2.1.3.4.1-1.

Table 14.2.1.3.4.1-1: Supported test configurations for NR SA FR1 Time-based Conditional Handover for Satellite Access

Configuration	Description
14.2.1.3-1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
14.2.1.3-2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Configure the test equipment and the DUT according to the parameters in Table 14.2.1.3.4.1-2

Table 14.2.1.3.4.1-2: Initial conditions for NR SA FR1 Time-based Conditional Handover for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.2.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.2.1.3.4.1-3.
2. Message contents are defined in clause 14.2.1.3.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbour cell, respectively) with the power level set according to clauses C.1.2 and C.1.3. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.2.1.3.4.1-3: General test parameters for NR SA FR1 Time-based Conditional Handover for Satellite Access

Parameter		Unit	Value	Comment
RF Channel Number			1	One NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	FDD duplex mode cell
	Neighbouring cell		Cell 2	FDD duplex mode cell
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H)			[(0, 0, 0)]	Set by AT command

t1-Threshold-r17.condEventT1-r17	s	T1	Entering condition at start of T2 (end of T1)
duration-r17.condEventT1-r17	slot	1000	Give 1s search duration
A3-Offset in condition	dB	-1	Modified by Test Tolerance
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μs	Synchronous cells
T1	s	5	
T2	s	≤ 2	

14.2.1.3.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD intra-frequency cells as given in table 14.2.1.3.4.1-3. The handover delay is tested.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode On according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. Establish SRB2 and DRB. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 14.2.1.3.5-1. Propagation conditions are set according to Annex C clause C.2.2.

3. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration-r16* on Cell 1 to configure time-based CHO condition on the UE, as specified in Table 14.2.1.3.4.3-1.

4. The UE shall transmit an *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.2.1.3.5-1. T2 starts.

6. If the UE transmits the PRACH preambles to Cell 2 less than 872 ms from the beginning of time period T2, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. After T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for the next iteration of the test procedure loop.

9. Once the connection is released, the SS shall switch off and then on the UE and then proceed with step 1.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.2.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.2.1.3.4.3-1: *RRCReconfiguration* for NR SA FR1 Time-based Conditional Handover for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 14.2.1.3.4.3-2	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
conditionalReconfiguration-r16	ConditionalReconfiguration	Table 14.2.1.3.4.3-6	

}			
}			
}			
}			
}			
}			
}			

Table 14.2.1.3.4.3-2: *MeasConfig* (Table 14.2.1.3.4.3-1) for NR SA FR1 Time-based Conditional Handover for Satellite Access

Derivation Path: Table H.3.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofObjectId)) OF MeasObjectToAddMod {	1 entry		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR	Table 14.2.1.3.4.3-3	
}			
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	2 entries		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR-T1	Table 14.2.1.3.4.3-4	
}			
}			
ReportConfigToAddMod[2] SEQUENCE {		entry 2	
reportConfigId	2		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR-A3	Table 14.2.1.3.4.3-5	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	2 entries		
MeasIdToAddMod[1] SEQUENCE {		entry 1	
measId	1		
measObjectId	1		
reportConfigId	1		
}			
MeasIdToAddMod[2] SEQUENCE {		entry 2	
measId	2		
measObjectId	1		
reportConfigId	2		
}			
}			
quantityConfig	QuantityConfig specified in Table H.3.1-5		
}			

Table 14.2.1.3.4.3-3: *MeasObjectNR* (Table 14.2.1.3.4.3-2) for NR SA FR1 Time-based Conditional Handover for Satellite Access

Derivation Path: TS 38.508-1[14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			

ssbFrequency	ARFCN-ValueNR for PCell		
smtc1	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.1		
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 14.2.1.3.4.3-4: *ReportConfigNR-T1* (Table 14.2.1.3.4.3-2) for NR SA FR1 Time-based Conditional Handover for Satellite Access

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
condTriggerConfig-r16 SEQUENCE {			
condEventId CHOICE {			
condEventT1-r17 SEQUENCE {			
t1-Threshold-r17	100*T	T is the time difference in seconds between start of T2 and the 00:00:00 UTC on Gregorian calendar date 1 January, 1900. Units in 10ms	
duration-r17	10	Each step represents 100ms (= 100 slots @ 15kHz SCS), so 1000 slots/100 slots = 10	
}			
}			
}			
}			
}			

Table 14.2.1.3.4.3-5: *ReportConfigNR-A3* (Table 14.2.1.3.4.3-2) for NR SA FR1 Time-based Conditional Handover for Satellite Access

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
condTriggerConfig-r16 SEQUENCE {			
condEventId CHOICE {			
condEventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	-2	actuall value = -2*0.5 = -1dB	
}			
hysteresis	0	actuall value = 0*0.5 = 0dB	
timeToTrigger	ms0		
}			
}			
}			
}			
}			

Table 14.2.1.3.4.3-6: *ConditionalReconfiguration* (Table 14.2.1.3.4.3-1) for NR SA FR1 Time-based Conditional Handover for Satellite Access

Derivation Path: TS 38.508-1[14], Table 4.6.3-25D			
Information Element	**Value/remark**	**Comment**	**Condition**

ConditionalReconfiguration-r16::= SEQUENCE {			
condReconfigToAddModList-r16 SEQUENCE (SIZE (1.. maxNrofCondCells-r16)) OF CondReconfigToAddMod-r16 {	1 entry		
CondReconfigToAddMod-r16 [1] SEQUENCE {		entry 1	
condReconfigId-r16	1		
condExecutionCond-r16 SEQUENCE (SIZE (1..2)) OF MeasId {	2 entries		
MeasId[1]	1	entry 1 MeasId configured in Table 14.2.1.3.4.3-2 Event T1	
MeasId[2]	2	entry 2 MeasId configured in Table 14.2.1.3.4.3-2 Event A3	
}			
condRRCReconfig-r16	OCTET STRING (CONTAINING RRCReconfiguration Specified in Table 4.8.1-1A with condition RBConfig_NoKeyChange)		
}			
}			
}			

14.2.1.3.5 Test requirements

Table 14.2.1.3.5-1 defines the primary level settings including test tolerances for NR SA FR1 Time-based Conditional Handover for Satellite Access.

Table 14.2.1.3.5-1: Cell specific parameters for NR SA FR1 Time-based Conditional Handover for Satellite Access

Parameter		Test configuration	Unit	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number		Config 1,2		1		1	
$BW_{channel}$			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
BWP BW			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
TA_{Common}		Config 1,2	s	0		0	
$TA_{CommonDrift}$			s	0		0	
$TA_{CommonDriftVariation}$			s	0		0	
K_{offset}		Config 1	ms	[239]		[239]	
		Config 2	ms	[4]		[4]	
K_{mac}		Config 1,2	ms	0		0	
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel				SR.1.1 FDD			
CORESET Reference Channel				CR.1.1 FDD			
TRS configuration				TRS.1.1 FDD			
OCNG Patterns				OP.1			
SMTC Configuration				SMTC.1			
SSB Configuration				SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz			
PRACH configuration				FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP	Config 1,2		DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS		Config 1,2	dB	0			
EPRE ratio of PBCH DMRS to SSS							

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1,2	dBm/ 15kHz	-98			
N_{oc} Note2		dBm/ SCS	-98			
$\hat{E}_s / I_{ot}$		dB	8	-2.41	-Infinity	1.36
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	10
SSB_RP		dBm/ SCS	-90	-90	-Infinity	-88
Io Note3		dBm/ 9.36MHz	-61.41	-57.67	-61.41	-57.67
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 872 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in clause 14.2.1.0.2.1, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay T_{RRC} = 10 ms and is specified in clause 12 in TS 38.331 [13].

T_{Event_DU} = start of T2

$T_{measure}$ = 600 + 200 ms; $T_{interrupt}$ = 62ms; $T_{CHO_execution}$ = 10ms.

This gives a total of 872 ms.

14.2.1.4 NR SA FR1-FR1 Time-based Conditional Handover for NR Satellite Access

Editor's Note:

- Several test parameters and configuration are still in brackets
- AT command related configuration is FFS
- Neighbor cell ephemeris needs further analysis

14.2.1.4.1 Test purpose

This test is to verify the requirement for inter-frequency SAN time-based conditional handover from FR1 to FR1 specified in clause 14.2.1.0.2.

14.2.1.4.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and time-based conditional handover.

14.2.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.2.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.2.1.4.

14.2.1.4.4 Test description

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of Cell 2. Immediately before the start of T1, the UE is configured to measure inter-frequency neighbour cell with Gap pattern ID gp0 and time-based handover trigger to Cell 2 with Event *CondEvent* T1.

Starting T2, Cell 2 becomes detectable and offset better than Cell 1 and after 1000ms of T2, time condition event *t1-Threshold-r17* is fulfilled.

14.2.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.2.1.4.4.1-1.

Table 14.2.1.4.4.1-1: Supported test configurations for NR SA FR1-FR1 Time-based Conditional Handover for Satellite Access

Configuration	Description
14.2.1.4-1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
14.2.1.4-2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Configure the test equipment and the DUT according to the parameters in Table 14.2.1.4.4.1-2

Table 14.2.1.4.4.1-2: Initial conditions for NR SA FR1-FR1 Time-based Conditional Handover for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.2.1.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.2.1.4.4.1-3.
2. Message contents are defined in clause 14.2.1.4.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbour cell, respectively) with the power level set according to clauses C.1.2 and C.1.3. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.2.1.4.4.1-3: General test parameters for NR SA FR1-FR1 Time-based Conditional Handover for Satellite Access

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR NTN satellite RF channel

Initial conditions	Active cell		Cell 1	FDD duplex mode cell
	Neighbouring cell		Cell 2	FDD duplex mode cell
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H)			[(0, 0, 0)]	Set by AT command
t1-Threshold-r17.condEventT1-r17		s	T1+1	Entering condition 1000ms after start of T2
duration-r17.condEventT1-r17		slot	1000	Give 1s search duration
Gap Pattern Id			0	
Measurement gap offset			9	
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤ 2	

14.2.1.4.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD inter-frequency cells as given in table 14.2.1.4.4.1-3. The handover delay is tested.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode On according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell. Establish SRB2 and DRB. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 14.2.1.4.5-1. Propagation conditions are set according to Annex C clause C.2.2.

3. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration-r16* on Cell 1 to configure time-based CHO condition on the UE, as specified in Table 14.2.1.4.4.3-1.

4. The UE shall transmit an *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.2.1.4.5-1. T2 starts.

6. If the UE transmits the PRACH preambles to Cell 2 later than 1000 ms and less than 1072 ms from the beginning of time period T2, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. After T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for the next iteration of the test procedure loop.

9. Once the connection is released, the SS shall switch off and then on the UE and then proceed with step 1.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.2.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.2.1.4.4.3-1: *RRCReconfiguration* for NR SA FR1-FR1 Time-based Conditional Handover for NR Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS and CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			

criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
measConfig	MeasConfig	Table 14.2.1.4.4.3-2	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
conditionalReconfiguration-r16	ConditionalReconfiguration	Table 14.2.1.4.4.3-6	
}			
}			
}			
}			
}			
}			
}			

Table 14.2.1.4.4.3-2: *MeasConfig* (Table 14.2.1.4.4.3-1) for NR SA FR1-FR1 Time-based Conditional Handover for NR Satellite Access

Derivation Path: Table H.3.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofObjectId)) OF MeasObjectToAddMod {	2 entries		
MeasObjectToAddMod[1] SEQUENCE {		entry 1	
measObjectId	1		
measObject CHOICE {			
measObjectNR	MeasObjectNR	Table 14.2.1.4.4.3-3	Cell 1
}			
}			
MeasObjectToAddMod[2] SEQUENCE {		entry 2	
measObjectId	2		
measObject CHOICE {			
measObjectNR	MeasObjectNR	Table 14.2.1.4.4.3-3	Cell 2
}			
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF ReportConfigToAddMod {	2 entries		
ReportConfigToAddMod[1] SEQUENCE {		entry 1	
reportConfigId	1		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR-T1	Table 14.2.1.4.4.3-4	
}			
}			
ReportConfigToAddMod[1] SEQUENCE {		entry 2	
reportConfigId	2		
reportConfig CHOICE {			
reportConfigNR	ReportConfigNR-A3	Table 14.2.1.4.4.3-5	
}			
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF MeasIdToAddMod {	2 entries		
MeasIdToAddMod[1] SEQUENCE {		entry 1	
measId	1		
measObjectId	2		
reportConfigId	1		
}			
MeasIdToAddMod[2] SEQUENCE {		entry 2	
measId	2		
measObjectId	2		
reportConfigId	2		

}			
}			
quantityConfig	QuantityConfig specified in Table H.3.1-5		
measGapConfig	MeasGapConfig specified in Table H.3.1-6 with conditions gapUE, Pattern #0 and gap offset = 9		
}			

Table 14.2.1.4.4.3-3: *MeasObjectNR* (Table 14.2.1.4.4.3-2) for NR SA FR1-FR1 Time-based Conditional Handover for NR Satellite Access

Derivation Path: TS 38.508-1[14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR for Cell 1		Cell 1
	ARFCN-ValueNR for Cell 2		Cell 2
smtc1	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.2		Cell 1
	SSB-MTC specified in TS 38.508-1[14] Table 7.3.1-3 with condition SMTC.5		Cell 2
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
}			
}			
absThreshSS-BlocksConsolidation	Not present		
}			

Table 14.2.1.4.4.3-4: *ReportConfigNR-T1* (Table 14.2.1.4.4.3-2) for NR SA FR1-FR1 Time-based Conditional Handover for NR Satellite Access

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
condTriggerConfig-r16 SEQUENCE {			
condEventId CHOICE {			
condEventT1-r17 SEQUENCE {			
t1-Threshold-r17	100*T	T is the time difference in seconds between 1000ms after the start of T2 and the 00:00:00 UTC on Gregorian calendar date 1 January, 1900. Units in 10ms	
duration-r17	10	Each step represents 100ms (=100 slots @ 15kHz SCS), so 1000 slots/100 slots = 10	
}			
}			
}			
}			
}			

Table 14.2.1.4.4.3-5: *ReportConfigNR-A3* (Table 14.2.1.4.4.3-2) for NR SA FR1-FR1 Time-based Conditional Handover for NR Satellite Access

Derivation Path: TS 38.508-1[14], Table 4.6.3-142 with condition CHO			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			

reportType CHOICE {			
condTriggerConfig-r16 SEQUENCE {			
condEventId CHOICE {			
condEventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	0	actuall value = 0*0.5 = 0dB	
}			
hysteresis	0	actuall value = 0*0.5 = 0dB	
timeToTrigger	ms0		
}			
}			
}			
}			
}			

Table 14.2.1.4.4.3-6: *ConditionalReconfiguration* (Table 14.2.1.4.4.3-1) for NR SA FR1-FR1 Time-based Conditional Handover for NR Satellite Access

Derivation Path: TS 38.508-1[14], Table 4.6.3-25D			
Information Element	**Value/remark**	**Comment**	**Condition**
ConditionalReconfiguration-r16::= SEQUENCE {			
condReconfigToAddModList-r16 SEQUENCE (SIZE (1.. maxNrofCondCells-r16)) OF CondReconfigToAddMod-r16 {	1 entry		
CondReconfigToAddMod-r16 [1] SEQUENCE {		entry 1	
condReconfigId-r16	1		
condExecutionCond-r16 SEQUENCE (SIZE (1..2)) OF MeasId {	2 entries		
MeasId[1]	1	entry 1 The MeasId configured in Table 14.2.1.4.4.3-2 Event T1	
MeasId[2]	2	entry 2 The MeasId configured in Table 14.2.1.4.4.3-2 Event A3	
}			
condRRCReconfig-r16	OCTET STRING (CONTAINING RRCReconfiguration Specified in Table 4.8.1-1A with condition RBConfig_NoKeyChange)		
}			
}			
}			

14.2.1.4.5 Test requirements

Table 14.2.1.4.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 Time-based Conditional Handover for Satellite Access.

Table 14.2.1.4.5-1: Cell specific parameters for NR SA FR1-FR1 Time-based Conditional Handover for Satellite Access

Parameter	Test configuration	Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number	Config 1, 2		1		2	
$BW_{channel}$		MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
BWP BW		MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
TA_{Common}	Config 1, 2	s	0		0	

$TA_{CommonDrift}$			s	0		0
$TA_{CommonDriftVariation}$			s	0		0
K_{offset}		Config 1	ms	239		239
		Config 2	ms	4		4
K_{mac}		Config 1, 2	ms	0		0
DRX Cycle			ms	Not Applicable		
PDSCH Reference measurement channel				SR.1.1 FDD		
CORESET Reference Channel				CR.1.1 FDD		
TRS configuration				TRS.1.1 FDD		
OCNG Patterns				OP.1		
SMTC Configuration				SMTC.2		SMTC.5
SSB Configuration				SSB.1 FR1		SSB.5 FR1
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz		
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz		
PRACH configuration				FR1 PRACH configuration 1		
BWP configuration	Initial DL BWP	Config 1, 2		DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
EPRE ratio of PSS to SSS		Config 1, 2	dB	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		Config 1, 2	dBm/ 15kHz	-98		
N_{oc} Note2			dBm/ SCS	-98		
$\hat{E}_s / I_{ot}$			dB	4	4	-Infinity	9
$\hat{E}_s / N_{oc}$			dB	4	4	-Infinity	9
SSB_RP			dBm/ SCS	-94	-94	-Infinity	-89
Io Note3			dBm/ 9.36MHz	-64.59	-64.59	-70.05	-60.53
Propagation condition			-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 later than 1000ms and less than 1072 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in clause 14.2.1.0.2.1, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay T_{RRC} = 10 ms and is specified in clause 12 in TS 38.331 [13].

T_{Event_DU} = start of T2

$T_{measure}$ = max(600 + 200, 1000) ms; $T_{interrupt}$ = 62ms; $T_{CHO_execution}$ = 10ms.

This gives a total of 1072 ms.

14.2.1.5 NR SA FR1 Distance-based Conditional Handover for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS
- Call setup and test procedure needs to be updated
- Several test parameters and configuration are still in brackets
- Annex E and F need to be updated

14.2.1.5.1 Test purpose

This test is to verify the requirement for intra-frequency SAN distance-based conditional handover from FR1 to FR1 specified in clause 14.2.1.0.2.

14.2.1.5.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access, distance-based conditional handover, and inter-satellite measurements.

14.2.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.2.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.2.1.5.

14.2.1.5.4 Test description

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure intra-frequency neighbour cell. The RRC message implying distance-based handover to cell 2 with Event CondEvent D1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2.

Starting T2, cell 2 becomes detectable and offset better than cell 1 and location condition event condEventD1-r17 is fulfilled.

14.2.1.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.2.1.5.4.1-1.

Table 14.2.1.5.4.1-1: Supported test configurations for NR SA FR1 Distance-based Conditional Handover for Satellite Access

Configuration	Description
14.2.1.5-1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
14.2.1.5-2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Configure the test equipment and the DUT according to the parameters in Table 14.2.1.5.4.1-2

Table 14.2.1.5.4.1-2: Initial conditions for NR SA FR1 Distance-based Conditional Handover for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.2.1.5.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

1. The general test parameter settings are set up according to Table 14.2.1.5.4.1-3.
2. Message contents are defined in clause 14.2.1.5.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbour cell, respectively) with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.2.1.5.4.1-3: General test parameters for NR SA FR1 Distance-based Conditional Handover for Satellite Access

Parameter		Unit	Value	Comment
RF Channel Number			1	One NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	FDD duplex mode cell
	Neighbouring cell		Cell 2	FDD duplex mode cell
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H) at T1 start			[(0, 0, 0)]	Set by AT command
UE moving speed		km/h	[(108, 0, 0)]	Set by AT command
referenceLocation1-r17.condEventD1-r17		m	[(-700, 0, 0)]	Reference location for serving cell
referenceLocation2-r17.condEventD1-r17		m	[(1300, 0, 0)]	Reference location for target cell
distanceThreshFromReference1-r17.condEventD1-r17		50m	[20]	D1-1 Location condition is fulfilled at T2
distanceThreshFromReference2-r17.condEventD1-r17		50m	[20]	D1-2 Location condition is fulfilled at T2
hysteresis-r17.condEventD1-r17		10m	0	
timeToTrigger-r17.condEventD1-r17		s	0	
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	12	
T2		s	≤ 6	

14.2.1.5.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD intra-frequency cells as given in table 14.2.1.5.4.1-3. Both handover delay and interruption length are tested.

Time interval T1 needs to start immediately after the UE position and moving speed are configured via AT commands.

1. Ensure the UE is in [state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5]. Cell 1 is the active cell. Establish SRB2 and DRB. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 14.2.1.5.5-1. Propagation conditions are set according to Annex C clause C.2.2. UE position and moving speed are configured on the UE via AT commands. Immediately after that, T1 starts.

3. The SS shall transmit an *RRCReconfiguration* message [with *conditionalReconfiguration* on Cell 1] to configure distance-based CHO condition on the UE.

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.2.1.5.5-1. T2 starts.

6. If the UE transmits the PRACH preambles to Cell 2 less than 872 ms from the beginning of time period T2, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. After T2 expires, [the SS sends an *RRCReconfiguration* with *reconfigurationWithSync*] to cause UE handover back to Cell 1. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2). If the handover back to Cell 1 was successful go to step 9. If the handover back to Cell 2 was not successful, go to step 8.

8. Switch off and then on the UE and go to step 1.

9. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.2.1.5.4.3 Message contents

FFS

14.2.1.5.5 Test requirements

Table 14.2.1.5.5-1 defines the primary level settings including test tolerances for NR SA FR1 Distance-based Conditional Handover for Satellite Access.

Table 14.2.1.5.5-1: Cell specific parameters for NR SA FR1 Distance-based Conditional Handover for Satellite Access

Parameter		Test configuration	Unit	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number		Config 1, 2		1		1	
$BW_{channel}$			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
BWP BW			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
TA_{Common}		Config 1, 2	s	0		0	
$TA_{CommonDrift}$			s	0		0	
$TA_{CommonDriftVariation}$			s	0		0	
K_{offset}		Config 1	ms	[239]		[239]	
		Config 2	ms	[4]		[4]	
K_{mac}		Config 1, 2	ms	0		0	
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel				SR.1.1 FDD			
CORESET Reference Channel				CR.1.1 FDD			
TRS configuration				TRS.1.1 FDD			
OCNG Patterns				OP.1			
SMTC Configuration				SMTC.1			
SSB Configuration				SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz			
PRACH configuration				FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP	Config 1, 2		DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			

	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS		Config 1, 2	dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		Config 1, 2	dBm/ 15kHz	-98+TT			
N_{oc} Note2			dBm/ SCS	-98+TT			
$\hat{E}_s / I_{ot}$			dB	8+TT	-3.3+TT	-Infinity	2.36+TT
$\hat{E}_s / N_{oc}$			dB	8+TT	8+TT	-Infinity	11+TT
SSB_RP			dBm/ SCS	-90+TT	-90+TT	-Infinity	-87+TT
Io Note3			dBm/ 9.36MHz	-61.41+TT	-57.06+TT	-61.41+TT	-57.06+TT
Propagation condition			-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 872 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in 38.133 [6] clause 6.1C.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay T_{RRC} = 10 ms and is specified in clause 12 in TS 38.331 [13].

T_{Event_DU} = start of T2

UE moving speed, v = (108km/h*1000/3600) = 30m/s.

At start of T2,

distance to source cell reference location is 30 m/s * 12 s – (-700)m = 1060m, and D1-1 = 1000m

distance to target cell reference location is 30 m/s * 12 s – 1300m = -940m, and D1-2 = 1000m

i.e. D1-1 and D1-2 conditions are fulfilled at start of T2 with >=50m location margin.

$T_{measure}$ = max(600 + 200 ms, 0) = 800 ms;

$T_{interrupt}$ = 62ms; $T_{CHO_execution}$ = 10ms.

This gives a total of 800ms + 62ms + 10ms = 872 ms.

14.2.1.6 NR SA FR1-FR1 Distance-based Conditional Handover for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS
- Call setup and test procedure needs to be updated
- Several test parameters and configuration are still in brackets
- Annex E and F need to be updated

14.2.1.6.1 Test purpose

This test is to verify the requirement for inter-frequency SAN distance-based conditional handover from FR1 to FR1 specified in clause 14.2.1.0.2.

14.2.1.6.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access, distance-based conditional handover, and inter-satellite measurements.

14.2.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.2.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.2.1.6.

14.2.1.6.4 Test description

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure inter-frequency neighbour cell and Gap pattern ID gp0. The RRC message implying distance-based handover to cell 2 with Event D1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2.

Starting T2, cell 2 becomes detectable and offset better than cell 1 and after 11670ms of T2, location condition event condEventD1-r17 is fulfilled.

14.2.1.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.2.1.6.4.1-1.

Table 14.2.1.6.4.1-1: Supported test configurations for NR SA FR1-FR1 Distance-based Conditional Handover for Satellite Access

Configuration	Description
14.2.1.6-1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
14.2.1.6-2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Configure the test equipment and the DUT according to the parameters in Table 14.2.1.6.4.1-2

Table 14.2.1.6.4.1-2: Initial conditions for NR SA FR1-FR1 Distance-based Conditional Handover for Satellite Access

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 14.2.1.6.4.1-1	

Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

1. The general test parameter settings are set up according to Table 14.2.1.6.4.1-3.
2. Message contents are defined in clause 14.2.1.6.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbour cell, respectively) with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.2.1.6.4.1-3: General test parameters for NR SA FR1-FR1 Distance-based Conditional Handover for Satellite Access

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	FDD duplex mode cell
	Neighbouring cell		Cell 2	FDD duplex mode cell
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H) at T1 start			[(0, 0, 0)]	Set by AT command
UE moving speed		km/h	[(108, 0, 0)]	Set by AT command
referenceLocation1-r17.condEventD1-r17		m	[(-700, 0, 0)]	Reference location for serving cell
referenceLocation2-r17.condEventD1-r17		m	[(1300, 0, 0)]	Reference location for target cell
distanceThreshFromReference1-r17.condEventD1-r17		50m	[20]	D1-1 Location condition is fulfilled at T2
distanceThreshFromReference2-r17.condEventD1-r17		50m	[20]	D1-2 Location condition is fulfilled at T2
hysteresis-r17.condEventD1-r17		10m	0	
timeToTrigger-r17.condEventD1-r17		s	0	
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	1	
T2		s	12	

14.2.1.6.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD inter-frequency cells as given in table 14.2.1.6.4.1-3. Both handover delay and interruption length are tested.

Time interval T1 needs to start immediately after the UE position and moving speed are configured via AT commands.

1. Ensure the UE is in [state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5]. Cell 1 is the active cell. Establish SRB2 and DRB. Set Cell 2 physical cell identity to the initial physical cell identity.
2. Set the parameters according to T1 in Table 14.2.1.6.5-1. Propagation conditions are set according to Annex C clause C.2.2. UE position and moving speed are configured on the UE via AT commands. Immediately after that, T1 starts.
3. The SS shall transmit an *RRCReconfiguration* message [with *conditionalReconfiguration* on Cell 1] to configure distance-based CHO condition on the UE.
4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.2.1.6.5-1. T2 starts.

6. If the UE transmits the PRACH preambles to Cell 2 less than 11741 ms from the beginning of time period T2, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. After T2 expires, [the SS sends an *RRCReconfiguration* with *reconfigurationWithSync*] to cause UE handover back to Cell 1. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 14 + 2). If the handover back to Cell 1 was successful go to step 9. If the handover back to Cell 2 was not successful, go to step 8.

8. Switch off and then on the UE and go to step 1.

9. Repeat steps 2-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.2.1.6.4.3 Message contents

FFS

14.2.1.6.5 Test requirements

Table 14.2.1.6.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 Distance-based Conditional Handover for Satellite Access.

Table 14.2.1.6.5-1: Cell specific parameters for NR SA FR1-FR1 Distance-based Conditional Handover for Satellite Access

Parameter		Test configuration	Unit	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number		Config 1, 2		1		2	
$BW_{channel}$			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
BWP BW			MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
TA_{Common}		Config 1, 2	s	0		0	
$TA_{CommonDrift}$			s	0		0	
$TA_{CommonDriftVariation}$			s	0		0	
K_{offset}		Config 1	ms	[239]		[239]	
		Config 2	ms	[4]		[4]	
K_{mac}		Config 1, 2	ms	0		0	
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel				SR.1.1 FDD			
CORESET Reference Channel				CR.1.1 FDD			
TRS configuration				TRS.1.1 FDD			
OCNG Patterns				OP.1			
SMTC Configuration				SMTC.1			
SSB Configuration				SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz			
PRACH configuration				FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP	Config 1, 2		DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS		Config 1, 2	dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							

EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	Config 1, 2	dBm/ 15kHz	-98+TT			
N_{oc} Note2		dBm/ SCS	-98+TT			
$\hat{E}_s / I_{ot}$		dB	4+TT	4+TT	-Infinity	9+TT
$\hat{E}_s / N_{oc}$		dB	4+TT	4+TT	-Infinity	9+TT
SSB_RP		dBm/ SCS	-94+TT	-94+TT	-Infinity	-89+TT
Io Note3		dBm/ 9.36MHz	-64.59+ TT	-64.59+ TT	-70.05	-60.53+ TT
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 later than 11670ms and less than 11741 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in 38.133 [6] clause 6.1C.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay T_{RRC} = 10 ms and is specified in clause 12 in TS 38.331 [13].

T_{Event_DU} = start of T2

UE moving speed, v = (108km/h*1000/3600) = 30m/s.

At 11670ms after start of T2,

distance to source cell reference location is 30 m/s * 11.67 s – (-700)m = 1050m, and D1-1 = 1000m

distance to target cell reference location is 30 m/s * 11.67 s – 1300m = -950m, and D1-2 = 1000m

i.e. D1-1 and D1-2 conditions are fulfilled at T2 + 11670ms with >=50m location margin.

$T_{measure}$ = max(600 + 200 ms, 11670ms) = 11670ms;

$T_{interrupt}$ = 62ms; $T_{CHO_execution}$ = 10ms.

This gives a total of 11670ms + 62ms + 10ms = 11741 ms.

14.2.2 RRC Connection Mobility Control for SAN

14.2.2.1 RRC Re-establishment for SAN

14.2.2.1.0 Minimum conformance requirements for RRC Re-establishment for Satellite Access

In RRC_CONNECTED state the UE shall be capable of sending *RRCReestablishmentRequest* message within $T_{re\text{-}establish_delay}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{re\text{-}establish_delay}$) shall be less than:

$$T_{re-establish_delay} = T_{UE_re-establish_delay} + T_{UL_grant}$$

T_{UL_grant}: It is the time required to acquire and process uplink grant from the target PCell. The uplink grant is required to transmit *RRCReestablishmentRequest* message.

The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in clause 5.3.7 of TS 38.331 [13] is detected by the UE and when the UE sends PRACH to the target PCell. The UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$) requirement shall be less than:

$$T_{UE_re-establish_delay} = 50\ ms + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

The intra-frequency target NR cell shall be considered detectable if each relevant SSB can satisfy that:

- SS-RSRP related side conditions given in 38.133 [6] clauses 10.1.2 and 10.1.3 are fulfilled for a corresponding NR Band for FR1, and
- the conditions of SSB_RP and SSB Ês/Iot according to 38.133 [6] Annex B.2.17 for a corresponding NR Band are fulfilled.

The inter-frequency target NR cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in 38.133 [6] clause 10.1.4 are fulfilled for a corresponding NR Band for FR1, and
- the conditions of SSB_RP and SSB Ês/Iot according to Annex B.2.18 for a corresponding NR Band are fulfilled.

$T_{identify_intra_NR}$: It is the time to identify the target intra-frequency NR cell and it depends on whether the target NR cell is known cell or unknown cell. If the UE is not configured with intra-frequency NR carrier for RRC re-establishment then $T_{identify_intra_NR}$=0; otherwise $T_{identify_intra_NR}$ shall not exceed the values defined in Table 14.2.2.1.0-1.

$T_{identify_inter_NR,i}$: It is the time to identify the target inter-frequency NR cell on inter-frequency carrier *i* configured for RRC re-establishment and it depends on whether the target NR cell is known cell or unknown cell. $T_{identify_inter_NR,i}$ shall not exceed the values defined in Table 14.2.2.1.0-2.

T_{SMTC}: It is the periodicity of the SMTC occasion configured for the intra-frequency carrier. If the UE has been provided with higher layer in TS 38.331 [13] signaling of *smtc2*, T_{smtc} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier *i*. If it is not configured, the UE may assume that the target SSB periodicity is no larger than 20 ms.

$T_{SI\text{-}NR}$: It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [13] for the target NR cell.

T_{PRACH}: It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{PRACH} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [8].

N_{freq}: It is the total number of NR frequencies to be monitored for RRC re-establishment; N_{freq} = 1 if the target intra-frequency NR cell is known, else N_{freq} = 2 and $T_{identify_intra_NR}$ = 0 if the target inter-frequency NR cell is known.

There is no requirement if the target cell does not contain the UE context.

In the requirement defined in the below tables, the target FR1 cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown.

The requirements in this clause apply provided that the ephemeris information provided by the serving cell for the target cell is valid during UE re-establishment delay ($T_{UE_re\text{-}establish_delay}$).

Table 14.2.2.1.0-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell

Serving cell SSB Ês/Iot (dB)	FR of target NR cell	$T_{identify_intra_NR}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 5 x T_{SMTC})	K_{multi_SMTC} * MAX (800 ms, 10 x T_{SMTC})
< -8	FR1	N/A	k * 800 ms Note1, 3
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when T_{SMTC} > 20 ms and serving cell SSB Ês/Iot < -8 dB. Note 2: K_{multi_SMTC} is defined in 38.133 [6] clause 9.2C.5.1. Note 3: k = 1 if the cells on the target frequency are served by GEO. k = (N+1) if the cells on the target frequency are served by LEO, where N is the number of different satellites associated to the list of configured neighbor cells in ntn-NeighCellConfigList and ntn-NeighCellConfigListExt.			

Table 14.2.2.1.0-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell

Serving cell SSB Ês/Iot (dB)	FR of target NR cell	$T_{identify_inter_NR,\ i}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 6 x $T_{SMTC,\ i}$)	K_satellite * MAX (800 ms, 13 x $T_{SMTC,\ i}$)
< -8	FR1	N/A	k * 800 ms Note1, 3
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{SMTC,i}$ > 20 ms and serving cell SSB Ês/Iot < -8 dB. Note 2: K_satellite is defined in 38.133 [6] clause 9.3C.4. Note 3: k = 1 if the cells on the target frequency are served by GEO. k = (N+1) if the cells on the target frequency are served by LEO, where N is the number of different satellites associated to the list of configured neighbor cells in ntn-NeighCellConfigList and ntn-NeighCellConfigListExt.			

The normative reference for this requirement is TS 38.133 [6] clause 6.2C.1.

14.2.2.1.1 NR SA FR1 RRC Re-establishment for Satellite Access

Editor's Note: This test is incomplete in the following aspects:

- MU and TT analysis is incomplete
- Message contents may need to be updated
- Applicability may need to be updated
- Several test parameters and configuration are still TBD or need to be recalculated
- Re-establishment delay calculation needs to be aligned with legacy tests

14.2.2.1.1.1 Test purpose

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. This test will verify the requirements in clause 14.2.2.1.0.

14.2.2.1.1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.2.2.1.1.3 Minimum conformance requirement

The minimum requirements are specified in clause 14.2.2.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.2.2.1.1.

14.2.2.1.1.4 Test description

The test parameters are given in Table 14.2.2.1.1.4.1-3 and Table 14.2.2.1.1.5-1 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

The UE shall be provided with valid information about the SAN serving each cell in the test before the test.

14.2.2.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.2.2.1.1.4.1-1.

Table 14.2.2.1.1.4.1-1: Supported test configurations for NR SA FR1 RRC Re-establishment for Satellite Access

Configuration	Description
14.2.2.1.1-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.2.2.1.1-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.2.2.1.1.4.1-2.

Table 14.2.2.1.1.4.1-2: Initial conditions for NR SA FR1 RRC Re-establishment for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.2.2.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.2.2.1.1.4.3.
2. The power levels and settings for Cell 1 and Cell 2 are set according to Annex C.1.2 and C.1.3. Cell 1 and Cell 2 are satellite access cells.
3. The test parameters are given in Table 14.2.2.1.1.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.2.2.1.1.4.1-3: General test parameters for NR SA FR1 RRC Re-establishment for Satellite Access

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
	Neighbour cells		1, 2	Cell2	
Final condition	Active cell		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1	3 ms	Asynchronous cells
N310		-	1, 2	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2	0	Radio link failure timer;
T311		ms	1, 2	3000	RRC re-establishment timer

Access Barring Information	-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration		1, 2	SMTC.2	
DRX cycle length	s	1, 2	OFF	
PRACH configuration		1, 2	PRACH.1 FR1	
T1	s	1, 2	5	
T2	ms	1, 2	640	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1C of 38.133 [6], T310 and the period for UE turns off transmitter defined in clause 8.1C.5 of 38.133 [6])
T3	s	1, 2	2	

14.2.2.1.1.4.2 Test Procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.
2. Set the parameters according to T1 in Table 14.2.2.1.1.5-1. T1 starts.
3. SS shall transmit an *RRCReconfiguration* message.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.2.2.1.1.5-1. T2 starts
6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 14.2.2.1.1.5-1. T3 starts
7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within [FFS ms (= FFSms + FFS s) from the beginning of time period T2], then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
9. Repeat step 2-8 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

14.2.2.1.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 14.2.2.1.1.4.3-1: Common Exception messages for NR SA FR1 RRC Re-establishment for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2

Table 14.2.2.1.1.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 RRC Re-establishment for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		

t311	ms3000		
n311	n1		
}			

14.2.2.1.1.5 Test Requirement

Table 14.2.2.1.1.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 RRC Re-establishment for Satellite Access.

Table 14.2.2.1.1.5-1: Cell-specific test parameters for NR SA FR1 RRC Re-establishment for Satellite Access

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Satellite information		1	SSC.1			NSC.1		
		2	SSC.2			NSC.2		
PDSCH RMC configuration		1, 2	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2	OP.1			OP.1		
TRS configuration		1, 2	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1, 2	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
SSB configuration		1, 2	SSB.1 FR1			SSB.1 FR1		
RLM-RS		1, 2	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1, 2	1.54+TT	-infinity	-infinity	-3.79+TT	4+TT	4+TT
N_{oc} Note2	dBm/SCS	1, 2	-98+TT					
N_{oc} Note2	dBm/15 kHz	1, 2	-98+TT					
$\hat{E}_s/N_{oc}$	dB	1, 2	7+TT	-infinity	-infinity	4+TT	4+TT	4+TT
SS-RSRP Note3	dBm/SCS	1, 2	-91+TT	-infinity	-infinity	-94+TT	-94+TT	-94+TT
Io	dBm/9.36 MHz	1, 2	-60.74+TT	-64.59+TT	-64.59+TT	-60.74+TT	-64.59+TT	-64.59+TT
Propagation Condition		1, 2	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell shall be less than 1.6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$N_{freq} = 1$

$T_{identify_intra_NR}$ = 200 ms

T_{SI} = 1280 ms, provided that SIB1 and SIB19 are scheduled with 20ms period; it is the time required for receiving all the relevant system information as defined in 38.331 [13] for the target intra-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of [1545] ms, allow [1.6] s in the test case.

14.2.2.1.2 NR SA FR1-FR1 RRC Re-establishment for Satellite Access

Editor's Note: This test is incomplete in the following aspects:

- MU and TT analysis is incomplete
- Message contents may need to be updated
- Applicability may need to be updated
- Several test parameters and configuration are still TBD or need to be recalculated
- Re-establishment delay calculation needs to be aligned with legacy tests

14.2.2.1.2.1 Test purpose

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. This test will verify the requirements in clause 14.2.2.1.0.

14.2.2.1.2.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.2.2.1.2.3 Minimum conformance requirement

The minimum requirements are specified in clause 14.2.2.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.2.2.1.2.

14.2.2.1.2.4 Test description

The test parameters are given in Table 14.2.2.1.2.4.1-3 and Table 14.2.2.1.2.5-1 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

The UE shall be provided with valid information about the SAN serving each cell in the test before the test.

14.2.2.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.2.2.1.2.4.1-1.

Table 14.2.2.1.2.4.1-1: Supported test configurations for NR SA FR1-FR1 RRC Re-establishment for Satellite Access

Configuration	Description
14.2.2.1.2-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.2.2.1.2-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.2.2.1.2.4.1-2.

Table 14.2.2.1.2.4.1-2: Initial conditions for NR SA FR1-FR1 RRC Re-establishment for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.2.2.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.2.2.1.2.4.3.
2. The power levels and settings for Cell 1 and Cell 2 are set according to Annex C.1.2 and C.1.3. Cell 1 and Cell 2 are satellite access cells.
3. The test parameters are given in Table 14.2.2.1.2.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.2.2.1.2.4.1-3: General test parameters for NR SA FR1-FR1 RRC Re-establishment for Satellite Access

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
	Neighbour cells		1, 2	Cell2	
Final condition	Active cell		1, 2	Cell2	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 ms	Asynchronous cells
N310		-	1, 2	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2	0	Radio link failure timer;
T311		ms	1, 2	5000	RRC re-establishment timer
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.2	
DRX cycle length		s	1, 2	OFF	
PRACH configuration			1, 2	PRACH.1 FR1	
T1		s	1, 2	5	

T2	ms	1, 2	640	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1C of 38.133 [6], T310 and the period for UE turns off transmitter defined in clause 8.1C.5 of 38.133 [6])
T3	s	1, 2	5	

14.2.2.1.2.4.2 Test Procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message.
2. Set the parameters according to T1 in Table 14.2.2.1.2.5-1. T1 starts.
3. SS shall transmit an *RRCReconfiguration* message.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.2.2.1.2.5-1. T2 starts
6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 14.2.2.1.2.5-1. T3 starts
7. If the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2 within [FFS ms (= FFSms + FFS s) from the beginning of time period T2], then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
8. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
9. Repeat step 2-8 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

14.2.2.1.2.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 14.2.2.1.2.4.3-1: Common Exception messages for NR SA FR1-FR1 RRC Re-establishment for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2

Table 14.2.2.1.2.4.3-2: *RLF-TimersAndConstants* for NR SA FR1-FR1 RRC Re-establishment for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms5000		
n311	n1		
}			

14.2.2.1.2.5 Test Requirement

Table 14.2.2.1.2.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1-FR1 RRC Re-establishment for Satellite Access.

Table 14.2.2.1.2.5-1: Cell-specific test parameters for NR SA FR1-FR1 RRC Re-establishment for Satellite Access

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Satellite information		1	SSC.1			NSC.1		
		2	SSC.2			NSC.2		
RF Channel Number		1, 2	1			2		
PDSCH RMC configuration		1, 2	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2	OP.1			OP.1		
TRS configuration		1, 2	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1, 2	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
SSB configuration		1, 2	SSB.1 FR1			SSB.1 FR1		
RLM-RS		1, 2	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1, 2	4+TT	-infinity	-infinity	-infinity	-infinity	7+TT
N_{oc} Note2	dBm/SCS	1, 2	-98+TT					
N_{oc} Note2	dBm/15 kHz	1, 2	-98+TT					
$\hat{E}_s/N_{oc}$	dB	1, 2	4+TT	-infinity	-infinity	-infinity	-infinity	7+TT
SS-RSRP Note3	dBm/SCS	1, 2	-94+TT	-infinity	-infinity	-infinity	-infinity	-91+TT
Io	dBm/9.36 MHz	1, 2	-64.59+TT	-70.05+TT	-70.05+TT	-70.05+TT	-70.05+TT	-62.26+TT
Propagation Condition		1, 2	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re\text{-}establish_delay} = T_{UL_grant} + T_{UE_re\text{-}establish_delay}.$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$T_{UE_re-establish_delay} = 50\ ms + T_{identify_intra_NR} + \sum_{i=1}^{Nfreq-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$

N_{freq} = 2

$T_{identify_intra_NR}$ = 800 ms

$T_{identify_inter_NR}$ = 800 ms

T_{SI} = 1280 ms, provided that SIB1 and SIB19 are scheduled with 20ms period; it is the time required for receiving all the relevant system information as defined in 38.331 [13] for the target inter-frequency NR cell.

T_{PRACH} = 15 ms; it is the additional delay caused by the random access procedure.

This gives a total of [2945] ms, allow [3] s in the test case.

14.2.2.4 NR SA FR1 RACH-based Hard Satellite switching with re-synchronization for Satellite Access

Editor's Note: This test is incomplete in the following aspects:

- MU and TT analysis is incomplete
- Message contents need to be updated
- Applicability needs to be updated
- Test procedure needs to be updated
- Annex E and F need to be updated

14.2.2.4.1 Test purpose

This test is to verify the requirement for RACH-based hard satellite switching with re-synchronization from SAN FR1 to SAN FR1 specified in clause 14.2.2.4.4.

14.2.2.4.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting satellite access and [RACH-based hard satellite switching with re-synchronization].

14.2.2.4.3 Minimum conformance requirement

The requirements in this clause apply provided that UE has the valid and applicable parameters of ephemeris information, common TA, DL and UL Polarization information, K_{offset}, and K_{mac} for target NR SAN cell during $D_{switch_unchangedPCI}$, otherwise interruption time may be longer than the requirements in clause 14.2.2.4.3.2.

Requirements for hard satellite switching are applicable for UEs that support *hardSatelliteSwitchResyncNTN-r18* or *softSatelliteSwitchResyncNTN-r18* [11] when the network configures hard satellite switching with resynchronization [13]; or for UEs that support *hardSatelliteSwitchResyncNTN*-r18 but do not support *softSatelliteSwitchResyncNTN-r18* when the network configures soft satellite switching with resynchronization.

14.2.2.4.3.1 Satellite switching delay

When the UE receives a broadcast message implying satellite switching within re-synchronization, the UE shall be ready to start the transmission of the new uplink PRACH channel or transmission of the new uplink PUSCH channel within $D_{switch_unchangedPCI}$ msec.

Where:

- $D_{switch_unchangedPCI}$ equals to the interruption time stated in clause 14.2.2.4.3.2.

14.2.2.4.3.2 Interruption time for hard satellite switch with re-sync

The interruption time is the time between *t-service* and the time when the UE is ready to receive any DL channel/signal and transmit any UL channel/signal from/to the target satellite.

When intra-frequency hard switch to NR SAN cell is commanded,

the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{processing} + T_{\Delta} + T_{margin}\ \text{ms}$$

Otherwise, no interruption time requirement is applied.

Where:

- T_{search} is the time required to search the target NR SAN cell assuming the target cell is not already known when UE starts synchronizing with target satellite. If the target cell Es/Iot $\geq$ -2 dB, then $T_{search} = T_{first_SSB}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.
- T_{Δ} is same as the one defined in 38.133 [6] section 6.1C.1.2.2.1.
- $T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 10 ms.
- T_{margin} is time for SSB post-processing. T_{margin} can be up to 2 ms.
- T_{first_SSB} is the time to the end of the first complete SSB burst of target satellite, the location of which is determined by the periodicity and location of SSB of the source satellite, and if *ssb-TimeOffset* is configured, the *ssb-TimeOffset* and the difference between propagation delay of the serving satellite and the target satellite counted from the *SSB-TimeOffset* reference point as defined in TS 38.331 [13] to UE.

UE is allowed to skip measurements for other cells and satellites than the target satellite and source satellite from *T-service* until the satellite switch completion.

The normative reference for this requirement is TS 38.133 [6] clause 6.1C.3.

14.2.2.4.4 Test description

The test scenario comprises of 1 NR FDD carrier and 2 cells with same PCI as given in Tables 14.2.2.4.4.1-1, 14.2.2.4.4.1-3, 14.2.2.4.5-1 and 14.2.2.4.5-2. Both satellite switching delay and interruption length are tested.

The test consists of two successive time periods, with time durations of T1 and T2 respectively.

At the start of time duration T1, the UE may not have any timing information of Cell 2. During T1, The SIB19 implying *t-service-r17* and target satellite configuration *SatSwitchWithReSync-r18* shall be sent to UE. The target satellite configuration is in Table 14.2.2.4.5-1.

At the start of time duration T2, Cell 2 becomes detectable and *t-service-r17* of Cell 1 is fulfilled.

The normative reference for this requirement is TS 38.133 [6] clause A.14.2.2.4.

14.2.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.2.2.4.4.1-1.

Table 14.2.2.4.4.1-1: Supported test configurations for NR SA FR1 RACH-based Hard Satellite switching with re-synchronization for Satellite Access

Configuration	Description
14.2.2.4-1	NGSO, NR FDD, 15 kHz SSB SCS, 10 MHz BW

Configure the test equipment and the DUT according to the parameters in Table 14.2.2.4.4.1-2.

Table 14.2.2.4.4.1-2: Initial conditions for NR SA FR1 RACH-based Hard Satellite switching with re-synchronization for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.2.2.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.2.2.4.4.3.
2. The power levels and settings for Cell 1 and Cell 2 are set according to Annex C.1.2 and C.1.3. Both Cell 1 and Cell 2 are satellite access cells.
3. The test parameters are given in Table 14.2.2.4.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.2.2.4.4.1-3: General test parameters for NR SA FR1 RACH-based Hard Satellite switching with re-synchronization for Satellite Access

Parameter		Unit	Value	Comment
RF Channel Number			1	One NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	
Final condition	Active cell		Cell 2	
UE position (N,S, H)			(0, 0, 0)	Set by AT command
Access Barring Information		-	Not barred	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	

14.2.2.4.4.2 Test Procedure

In this test Cell 1 and Cell 2 have the same physical cell identity. This identity does not change across iterations.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 14.2.2.4.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.
3. SS shall transmit an *RRCReconfiguration* message, configuring [RACH-based hard satellite switching on the UE] as specified in section 14.2.2.4.4.3.
4. UE shall transmit *RRCReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.2.2.4.5-1. [This causes *t-Service-r17* of Cell 1 to be fulfilled].
6. The UE shall start satellite switching on Cell 2. If the UE transmits the uplink PRACH channel to Cell 2 less than 52.5 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
7. After T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
8. Once the connection is released, the SS shall switch off and then on the UE.

9. Repeat steps 1-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.2.2.4.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

FFS

14.2.2.4.5 Test Requirement

Table 14.2.2.4.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 RACH-based Hard Satellite switching with re-synchronization for Satellite Access.

Table 14.2.2.4.5-1: Cell-specific test parameters for NR SA FR1 RACH-based Hard Satellite switching with re-synchronization for Satellite Access

Parameter		Unit	Cell 1[Note1]		Cell 2[Note1]	
			T1	T2	T1	T2
Satellite configuration[Note2]			SSC.2	N/A	N/A	SSC.2
$BW_{channel}$		MHz	10: $N_{PRB,c}$ = 52			10: $N_{PRB,c}$ = 52
BWP BW		MHz	10: $N_{PRB,c}$ = 52			10: $N_{PRB,c}$ = 52
K_{mac}		ms	0			0
DRX Cycle		ms	Not Applicable			Not Applicable
PDSCH Reference measurement channel			SR.1.1 FDD			SR.1.1 FDD
CORESET Reference Channel			CR.1.1 FDD			CR.1.1 FDD
TRS configuration			TRS.1.1 FDD			TRS.1.1 FDD
OCNG Patterns			OP.1			OP.1
SMTC Configuration			SMTC.1			SMTC.1
SSB Configuration			SSB.1 FR1			SSB.1 FR1
PDSCH/PDCCH subcarrier spacing		kHz	15 kHz			15 kHz
PUCCH/PUSCH subcarrier spacing		kHz	15 kHz			15 kHz
PRACH configuration			FR1 PRACH configuration 1			FR1 PRACH configuration 1
BWP configuration	Initial DL BWP		DLBWP.0.1			DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1			DLBWP.1.1
	Initial UL BWP		ULBWP.0.1			ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1			ULBWP.1.1
EPRE ratio of PSS to SSS		dB	0			0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} [Note3]		dBm/ 15 kHz	-98+TT			
N_{oc} [Note3]		dBm/ SCS	-98+TT			
$\hat{E}_s / I_{ot}$		dB	8+TT	-Infinity	-Infinity	8+TT
$\hat{E}_s / N_{oc}$		dB	8+TT	-Infinity	-Infinity	8+TT
SSB_RP		dBm/ SCS	-90+TT	-Infinity	-Infinity	-90+TT
Io[Note4]		dBm/ 9.36 MHz	-61.41+TT	-61.41+TT	-61.41+TT	-61.41+TT
Propagation condition		-	AWGN			

NOTE 1: Cell 1 and Cell 2 have same PCI. Satellite serving for Cell 1 and Satellite serving for Cell 2 are two different NGSO satellites.

NOTE 2: SSB transmit timing from TE should fit the SSB-timeOffset and the nominal propagation delay difference between serving satellite and target satellite. The nominal propagation delay is counted from the SSB-TimeOffset reference point to UE, which based on satellite locations and UE location known to the TE in this test case.

Parameter	Unit	Cell 1[Note1]		Cell 2[Note1]	
		T1	T2	T1	T2
NOTE 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 4: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 5: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table 14.2.2.4.5-2: Target Satellite configuration pattern for NR SA FR1 RACH-based Hard Satellite switching with re-synchronization for Satellite Access

Parameter	TSC.1
Interval between adjacent epoch time	2.56 s
ntn-UlSyncValidityDuration	5 s
cellSpecificKoffset	14 slots
ta-Common	0
ta-CommonDrift	0
ta-CommonDriftVariant	0
ntn-PolarizationDL	linear
ntn-PolarizationUL	linear
ephemerisInfo	Detailed ephemeris information is provided in TS 38.508-1 [14]
ssb-TimeOffset	0

The UE shall start to transmit the PRACH to Cell 2 less than 52.5 ms from the beginning of time period T2.

The rate of correct satellite switch observed during repeated tests shall be at least 90 %.

NOTE: The hard satellite switch with re-sync delay $D_{switch_unchangedPCI}$ can be expressed as: $T_{interrupt}$, where:

$T_{interrupt}$ is defined in clause 14.2.2.4.3.2.

$$D_{switch_unchangedPCI} = T_{interrupt} = T_{search} + T_{processing} + T_{\Delta} + T_{margin}\ \text{ms}$$

Here: $T_{search} = T_{first_SSB} = 0.5\text{ms}$; $T_{processing} = 10\text{ms}$; $T_{\Delta} = 20\text{ms}$; $T_{margin} = 2\text{ms}$.

Besides, interruption uncertainty $T_{IU} = 20\text{ms}$ in acquiring the first PRACH transmission resource is needed.

This gives a total of 52.5 ms.

14.2.2.5 NR SA FR1 RACH-less Soft Satellite switching with re-synchronization for Satellite Access

Editor's Note: This test is incomplete in the following aspects:

- MU and TT analysis is incomplete
- Message contents need to be updated
- Applicability needs to be updated
- Test procedure needs to be updated
- Annex E and F need to be updated

14.2.2.5.1 Test purpose

This test is to verify the requirement for RACH-less soft satellite switching with re-synchronization from SAN FR1 to SAN FR1 specified in clause 14.2.2.5.4.

14.2.2.5.2 Test applicability

This test applies to all types of NR UE release 18 and forward supporting satellite access and [RACH-less soft satellite switching with re-synchronization].

14.2.2.5.3 Minimum conformance requirement

The requirements in this clause apply provided that UE has the valid and applicable parameters of ephemeris information, common TA, DL and UL Polarization information, K_{offset}, and K_{mac} for target NR SAN cell during $D_{switch_unchangedPCI}$, otherwise interruption time may be longer than the requirements in clause 14.2.2.5.3.2.

Requirements for soft satellite switching are applicable for UEs that support *softSatelliteSwitchResyncNTN-r18* [11] when network configures soft satellite switching with resynchronization [13].

14.2.2.5.3.1 Satellite switching delay

When the UE receives a broadcast message implying satellite switching within re-synchronization, the UE shall be ready to start the transmission of the new uplink PRACH channel or transmission of the new uplink PUSCH channel within $D_{switch_unchangedPCI}$ msec.

Where:

- $D_{switch_unchangedPCI}$ equals to the interruption time stated in clause 14.2.2.5.3.2.

14.2.2.5.3.2 Interruption time for hard satellite switch with re-sync

The Satellite switch delay is from *t-serviceStart* to the time instance when UE is ready to receive any DL channel/signal and transmit any UL channel/signal from/to the target satellite.

When intra-frequency soft switch to NR SAN cell is commanded,

the satellite switch time shall be less than T_{soft_switch}

$$T_{soft_switch} = \max(\textit{t-service-t-seviceStart}, T_{search} + T_{\Delta} + T_{margin}) + T_{processing} \text{ ms}$$

Where:

- T_{search} is the time required to search the target NR SAN cell assuming the target cell is not already known when the handover command is received by the UE. If the target cell Es/Iot $\geq$ -2 dB, then $T_{search} = T_{first_SSB}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.
- T_{Δ} is same as the one defined in 38.133 [6] section 6.1C.2.2.2.1.
- $T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 10 ms.
- T_{margin} is same as the one defined in 38.133 [6] section 6.1C.2.2.2.1.
- T_{first_SSB} is the time to the end of the first complete SSB burst of target satellite, the location of which is determined by the periodicity and location of SSB of the source satellite, the *ssb-TimeOffset* and the difference between propagation delay of the serving satellite and the target satellite counted from *SSB-TimeOffset* reference point as defined in 38.331 [13] to UE.

During the time period from *t-seviceStart* to *t-service*, scheduling restriction as defined in 38.133 [6] clause 9.2C.5.3 is allowed, with the exception that the locations of SSB symbols of target satellite where scheduling restriction applies are determined by the periodicity and location of SSB of the source satellite, the *ssb-TimeOffset* and the difference between propagation delay of the serving satellite and the target satellite counted from the *SSB-TimeOffset* reference point as defined in 38.331 [13] to UE.

UE is allowed to skip measurements for other cells and satellites than the target satellite and source satellite from *t-seviceStart* to the satellite switch completion.

The requirement in this clause applies and UE is required to keep the connection (DL and UL) with the source NGSO satellite, under the following conditions:

- SSBs from the two satellites are spaced apart from each other at least by 1 OFDM symbol in the time domain at UE Rx side.

The normative reference for this requirement is TS 38.133 [6] clause 6.1C.3.

14.2.2.5.4 Test description

The test scenario comprises of 1 NR FDD carrier and 2 cells with same PCI as given in Tables 14.2.2.5.4.1-1, 14.2.2.5.4.1-3, 14.2.2.5.5-1 and 14.2.2.5.5-2. Satellite switching delay is tested.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively.

At the start of time duration T1, the UE may not have any timing information of Cell 2. During T1, The SIB19 implying *t-service-r17* and target satellite configuration *SatSwitchWithReSync-r18* shall be sent to UE. The target satellite configuration is in table 14.2.2.5.5-1. The configured grant PUSCH transmission in the Cell 2 is configured in the RRC message from Cell 1.

At the start of time duration T2, Cell 2 becomes detectable and *t-ServiceStart-r18* is fulfilled.

At the start of time duration T3, *t-service-r17* of Cell 1 is fulfilled.

The normative reference for this requirement is TS 38.133 [6] clause A.14.2.2.5.

14.2.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.2.2.5.4.1-1.

Table 14.2.2.5.4.1-1: Supported test configurations for NR SA FR1 RACH-less Soft Satellite switching with re-synchronization for Satellite Access

Configuration	Description
14.2.2.5-1	NGSO, NR FDD, 15 kHz SSB SCS, 10 MHz BW

Configure the test equipment and the DUT according to the parameters in Table 14.2.2.5.4.1-2.

Table 14.2.2.5.4.1-2: Initial conditions for NR SA FR1 RACH-less Soft Satellite switching with re-synchronization for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.2.2.5.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.2.2.5.4.3.
2. The power levels and settings for Cell 1 and Cell 2 are set according to Annex C.1.2 and C.1.3. Both Cell 1 and Cell 2 are satellite access cells.
3. The test parameters are given in Table 14.2.2.5.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.2.2.5.4.1-3: General test parameters for NR SA FR1 RACH-less Soft Satellite switching with re-synchronization for Satellite Access

Parameter	Unit	Value	Comment
RF Channel Number		1	One NR NTN satellite RF channel

Initial conditions	Active cell		Cell 1	
Final condition	Active cell		Cell 2	
UE position (N,S, H)			(0, 0, 0)	Set by AT command
Access Barring Information		-	Not barred	No additional delays in random access procedure.
timeDomainOffset			0	
timeDomainAllocation			0	PUSCH MappingType A *startSymbol S=0* *Length* L=14
timeReferenceSFN-r16			sfn512	
Periodcity			sym10x14	
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		ms	100	
T3		s	≤5	

14.2.2.5.4.2 Test Procedure

In this test Cell 1 and Cell 2 have the same physical cell identity. This identity does not change across iterations.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 14.2.2.5.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.
3. SS shall transmit an *RRCReconfiguration* message, configuring [RACH-less soft satellite switching on the UE] as specified in section 14.2.2.5.4.3.
4. UE shall transmit *RRCReconfigurationComplete* message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.2.2.5.5-1. [Cell 2 becomes detectable and *t-ServiceStart-r18* is fulfilled on Cell 2, however *t-Service-r17* on Cell 1 is not yet fulfilled].
6. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 14.2.2.5.5-1. [This time, *t-Service-r17* on Cell 1 is fulfilled].
7. The UE shall start satellite switching on Cell 2. If the UE transmits the uplink PUSCH channel to Cell 2 less than 130 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
8. After T3 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
9. Once the connection is released, the SS shall switch off and then on the UE.
10. Repeat steps 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.2.2.5.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

FFS

14.2.2.5.5 Test Requirement

Table 14.2.2.5.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 RACH-less Soft Satellite switching with re-synchronization for Satellite Access.

Table 14.2.2.5.5-1: Cell-specific test parameters for NR SA FR1 RACH-less Soft Satellite switching with re-synchronization for Satellite Access

Parameter		Unit	Cell 1[Note1]			Cell 2[Note1]		
			T1	T2	T3	T1	T2	T3
Satellite configuration[Note2]			SSC.2		N/A	N/A	SSC.2	
$BW_{channel}$		MHz	10: $N_{PRB,c}$ = 52				10: $N_{PRB,c}$ = 52	
BWP BW		MHz	10: $N_{PRB,c}$ = 52				10: $N_{PRB,c}$ = 52	
K_{mac}		ms	0				0	
DRX Cycle		ms	Not Applicable				Not Applicable	
PDSCH Reference measurement channel			SR.1.1 FDD				SR.1.1 FDD	
CORESET Reference Channel			CR.1.1 FDD				CR.1.1 FDD	
TRS configuration			TRS.1.1 FDD				TRS.1.1 FDD	
OCNG Patterns			OP.1				OP.1	
SMTC Configuration			SMTC.1				SMTC.5	
SSB Configuration			SSB.1 FR1				SSB.5 FR1	
PDSCH/PDCCH subcarrier spacing		kHz	15 kHz				15 kHz	
PUCCH/PUSCH subcarrier spacing		kHz	15 kHz				15 kHz	
PRACH configuration			FR1 PRACH configuration 1				N/A	
BWP configuration	Initial DL BWP		DLBWP.0.1				DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1				DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1				ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1				ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0				0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} [Note2]		dBm/ 15 kHz	-98+TT					
N_{oc} [Note2]		dBm/ SCS	-98+TT					
$\hat{E}_s / I_{ot}$		dB	4+TT	4+TT	-Infinity	-Infinity	9+TT	9+TT
$\hat{E}_s / N_{oc}$		dB	4+TT	4+TT	-Infinity	-Infinity	9+TT	9+TT
SSB_RP		dBm/ SCS	-94+TT	-94+TT	-Infinity	-Infinity	-89+TT	-89+TT
Io[Note3]		dBm/ 9.36 MHz	-64.59+TT	-64.59+TT	-70.05+TT	-70.05+TT	-60.53+TT	-60.53+TT
Propagation condition		-	AWGN					

NOTE 1: Cell 1 and Cell 2 have same PCI. Satellite serving for Cell 1 and Satellite serving for Cell 2 are two different NGSO satellites.
NOTE 2: SSB transmit timing from TE should fit the SSB-timeOffset and the nominal propagation delay difference between serving satellite and target satellite. The nominal propagation delay is counted from the SSB-TimeOffset reference point to UE, which based on satellite locations and UE location known to the TE in this test case.
NOTE 3: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 4: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 5: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table 14.2.2.5.5-2: Target Satellite configuration pattern for NR SA FR1 RACH-less Soft Satellite switching with re-synchronization for Satellite Access

Parameter	TSC.2
Interval between adjacent epoch time	2.56 s
ntn-UlSyncValidityDuration	5 s
cellSpecificKoffset	14 slots
ta-Common	0
ta-CommonDrift	0
ta-CommonDriftVariant	0
ntn-PolarizationDL	linear
ntn-PolarizationUL	linear
ephemerisInfo	Detailed ephemeris information is provided in TS 38.508-1 [14]
ssb-TimeOffset	10
t-ServiceStart	T2

The UE shall start to transmit the PUSCH to Cell 2 less than 130 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90 %.

NOTE: The satellite switch with re-sync delay $D_{switch_unchangedPCI}$ can be expressed as: T_{soft_switch}, where:

$$T_{soft_switch} = \max(t\text{-}service\text{-}t\text{-}seviceStart, T_{search} + T_{\Delta} + T_{margin}) + T_{IU} + T_{processing} \text{ ms}$$

Here: *t-service-t-seviceStart*= 100ms; T_{search} = 10.5ms; T_{Δ} = 20ms; T_{margin} = 2ms, $T_{processing}$ = 10ms.

Besides, interruption uncertainty T_{IU} = 20ms in acquiring the first configured grant based PUSCH transmission resource is needed.

This gives a total of 130 ms.

14.3 Timing for Satellite Access

14.3.1 UE transmit timing for Satellite Access

14.3.1.0 Minimum conformance requirements

The UE shall have capability to follow the frame timing change of the reference cell in connected state. The uplink frame transmission takes place $\left(N_{\mathrm{TA}} + N_{\mathrm{TA\text{-}offset}} + N_{\mathrm{TA,adj}}^{\mathrm{common}} + N_{\mathrm{TA,adj}}^{\mathrm{UE}}\right) \times T_{\mathrm{c}}$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell. UE initial transmit timing accuracy and gradual timing adjustment requirements are defined in the following requirements.

The normative reference for this requirement is TS.38.133 [6] clause 7.1C.1.

14.3.1.0.1 Minimum conformance requirements for UE transmit timing accuracy

The UE initial transmission timing error shall be less than or equal to $\pm T_{e_NTN}$ where the timing error limit value T_{e_NTN} is specified in Table 14.3.1.0.1-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS, or it is the PRACH transmission, or it is the msgA transmission.

The UE shall meet the T_{e_NTN} requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $\left(N_{\mathrm{TA}} + N_{\mathrm{TA\text{-}offset}} + N_{\mathrm{TA,adj}}^{\mathrm{common}} + N_{\mathrm{TA,adj}}^{\mathrm{UE}}\right) \times T_{\mathrm{c}}$.

The downlink timing is defined as the time when the first path (in time) of the corresponding downlink frame used by the UE to determine downlink timing is received from the reference cell at the UE antenna.

N_{TA} for PRACH is defined as 0. $\left(N_{TA} + N_{TA\text{-}offset} + N_{TA,adj}^{common} + N_{TA,adj}^{UE}\right) \times T_c$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in 38.133 [6] clause 7.3 was applied. or after the last update in $N_{TA,adj}^{common}$ or $N_{TA,adj}^{UE}$.

The value of $N_{TA\text{-}offset}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{TA\text{-}offset}$ is defined in 38.133 [6] Table 7.1.2-2.

$N_{TA,adj}^{common}$ and $N_{TA,adj}^{UE}$ are as defined in 38.211 [7].

Table 14.3.1.0.1-1: T_{e_NTN} Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_{e_NTN}
1	15	15	29*64*T_c
		30	24*64*T_c
		60	N/A
	30	15	24*64*T_c
		30	22*64*T_c
		60	N/A
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell, the updating of $N_{TA,adj}^{common}$ and the updating of $N_{TA,adj}^{UE}$, except when the timing advance in 38.133 [6] clause 7.3C is applied.

The normative reference for this requirement is TS.38.133 [6] clause 7.1C.2.

14.3.1.0.2 Minimum conformance requirements for gradual timing adjustment

When the transmission timing error between the UE and the reference timing exceeds $\pm T_{e_NTN}$ then the UE shall adjust the timing such that timing error is to within $\pm T_{e_NTN}$. The reference timing shall be $\left(N_{TA} + N_{TA\text{-}offset} + N_{TA,adj}^{common} + N_{TA,adj}^{UE}\right) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

1) The maximum amount of the magnitude of the timing change, apart from a change of $N_{TA,adj}^{UE}$ due to satellite position update and $N_{TA,adj}^{common}$ between the previous transmission and the current transmission, in one adjustment shall be T_{q_NTN}.

2) The minimum aggregate adjustment rate, apart from a change of $N_{TA,adj}^{UE}$ due to satellite position update and $N_{TA,adj}^{common}$ during the last one second, shall be T_{p_NTN} per second.

3) The maximum aggregate adjustment rate, apart from a change of $N_{TA,adj}^{UE}$ due to satellite position update and $N_{TA,adj}^{common}$ during the last 200ms, shall be T_{q_NTN} per 200 ms.

Where, the maximum autonomous time adjustment step T_{q_NTN} and the aggregate adjustment rate T_{p_NTN} are specified in Table 14.3.1.0.2-1.

Table 14.3.1.0.2-1: T_{q_NTN} Maximum Autonomous Time Adjustment Step and T_{p_NTN} Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (kHz)	T_{q_NTN}	T_{p_NTN}
1	15	5.5*64*T_c	5.5*64*T_c
	30	5.5*64*T_c	5.5*64*T_c
	60	N/A	N/A
NOTE: T_c is the basic timing unit defined in TS 38.211 [7]			

The normative reference for this requirement is TS.38.133 [6] clause 7.1C.2.1

14.3.1.1 NR SA FR1 UE transmit timing accuracy for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS
- Call setup and test procedure needs to be updated
- Applicability may need to be updated
- Exceptions to connection diagram may need to be updated
- Several sections are in brackets
- Several test parameters and configuration are still in brackets
- Whether GNSS is used and its config is FFS

14.3.1.1.1 Test purpose

The purpose of this test is to verify that the UE can follow frame timing change of the reference cell and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clauses 14.3.1.0.1 and 14.3.1.0.2. Supported test configurations are shown in Table 14.3.1.1.4.1-1.

14.3.1.1.2 Test applicability

This test applies to all types of NR UE from Release 17 and onwards supporting satellite access. Test 2 requires support of long DRX cycle.

14.3.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 14.3.1.0.1 and 14.3.1.0.2.

The normative reference for this requirement is 38.133 [6] clause A.14.3.1.1

14.3.1.1.4 Test Description

The test consists of a single NR cell (PCell). Table 14.3.1.1.5-1 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table 14.3.1.1.5-2.

14.3.1.1.4.1 Initial Conditions

This test shall be tested in one of the configurations defined in Table 14.3.1.1.4.1-1.

Table 14.3.1.1.4.1-1: Supported test configurations for NR SA FR1 UE transmit timing accuracy for Satellite Access

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Configure the test equipment and the DUT according to the parameters in Table 14.3.1.1.4.1-2

Table 14.3.1.1.4.1-2: Initial conditions for NR SA FR1 UE transmit timing accuracy for Satellite Access

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	[For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part]		[4Rx support is FFS, exceptions may need to be removed]

1. Message contents are defined in clause 14.3.1.1.4.3.
2. Cell 1 is the NR PCell with the power level set according to clauses [C.1.2 and C.1.3] for this test. [Cell 1 is a satellite access cell].
3. The initial test environment conditions are setup according to section 14.0.5, with the following exceptions:
   - For GSO instead of 38.508-1 [14] Tables 7.6.2.1-1a and 7.6.2.1-1b, use Tables 7.6.2.2-1, 7.6.2.2-3 and 7.6.2.2-5.
   - For NGSO (LEO-600) instead of 38.508-1 [14] Tables 7.6.2.1-2a and 7.6.2.1-2b, use Tables 7.6.2.2-4 and 7.6.2.2-6.
   - For NGSO (LEO-1200) instead of 38.508-1 [14] Tables 7.6.2.1-3a and 7.6.2.1-3b, use Table 7.6.2.2-2.

14.3.1.1.4.2 Test procedure

The test consists of a single NR cell (PCell). The downlink timing of the NR Cell is changed and the changes in UE transmit timing are observed. The transmit timing is verified by the UE transmitting SRS used as a measurement reference facilitating the SS timing estimation.

1. Ensure the UE is in [state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* according to TS 38.508-1 [6] clause 4.5]. Cell 1 is the active cell.
2. Set up NR Cell according to parameters given in Table 14.3.1.1.5-1.
3. The SS shall transmit an *RRCReconfiguration* message configuring the UE with periodic SRS transmissions according to clause 14.3.1.1.4.3. In Test 2, the UE is also configured with DRX configuration according to Table 14.3.1.1.5-2, for Test 1 and Test 2, correspondingly.
4. The UE shall transmit *RRCReconfigurationComplete* message.
5. After connection set up with the cell, and before the DL timing adjustment, the test equipment shall verify that the timing of the NR cell is within $\left(N_{\mathrm{TA}} + N_{\mathrm{TA\text{-}offset}} + N_{\mathrm{TA,adj}}^{\mathrm{common}} + N_{\mathrm{TA,adj}}^{\mathrm{UE}}\right) \times T_{\mathrm{c}} \pm \left(T_{\mathrm{e_NTN}} - T_{\mathrm{GNSS_margin}}\right)$ of the first detected path of DL SSB.
   a. The $N_{\mathrm{TA_offset}}$ value (in T_{c} units) is 25600
   b. The $N_{\mathrm{TA,adj}}^{\mathrm{common}}$ value is derived from the higher-layer parameters *TACommon*, *TACommonDrift*, and *TACommonDriftVariation*.
   c. The $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$ value is computed by the UE based on UE position and serving-satellite-ephemeris-related higher-layers parameters.
   d. The $T_{\mathrm{e_NTN}}$ values depend on the DL and UL SCS for which the test is being run and are given in Table 14.3.1.1.5-4.
   e. The $T_{\mathrm{GNSS_margin}}$ is the margin for the GNSS position definition error considered in the core requirement, which needs to be substracted for the test requirement, due to the usuage of AT commands in the test. $T_{\mathrm{GNSS_margin}} = [327{,}68] \times T_{\mathrm{c}}$

6. The test system shall adjust the timing of the DL path by values given in Table 14.3.1.1.4.2-1. For Test 2, the DL timing change shall be applied within the first half of the DRX cycle upon expiration of the preceding DRX ON duration.

Table 14.3.1.1.4.2-1: Adjustment Value for NR SA FR1 UE transmit timing accuracy for Satellite Access

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
15	+64*64T_c	+32*64T_c

7. For Test 1, the test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Table 14.3.1.1.5-5. The test system samples the UE Transmit Timing once per SRS transmission (as per configured SRS periodicity) and checks these against the following rules:

   - Rule 1: the SS shall check that the maximum amount of the magnitude of the timing change, apart from a change of $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$ due to satellite position update and $N_{\mathrm{TA,adj}}^{\mathrm{common}}$ between the previous transmission and the current transmission, in one adjustment shall be T_{q_NTN}, as specified in Table 14.3.1.1.5-5.

   - Rule 2: to check that the minimum adjustment rate is within Rule 2 as specified in clause 14.3.1.0.1 and Table 14.3.1.1.5-5, the SS shall measure the change in SRS transmission timing, apart from a change of $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$ due to satellite position update and $N_{\mathrm{TA,adj}}^{\mathrm{common}}$, over a 1 + offset seconds sliding window (offset in ms to the next consecutive SRS transmission), with step size p (where p is the periodicity of SRS) , as long as the resulting slot is a valid UL slot.

   - Rule 3: to check that the maximum aggregate adjustment rate is within Rule 3 as specified in clause 14.3.1.0.1 and Table 14.3.1.1.5-5, the SS shall measure the change in SRS transmission timing, apart from a change of $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$ due to satellite position update and $N_{\mathrm{TA,adj}}^{\mathrm{common}}$, over a 200ms - offset sliding window of previous SRS transmission, with step size p (where p is the periodicity of SRS), as long as the resulting slot is a valid UL slot.

   The three rules apply until the UE transmit timing offset is within the limits specified in Table 14.3.1.1.5-5 with respect to the first detected path (in time) of the corresponding downlink frame of Cell 1. The test system will wait till evaluation interval of T seconds is met to ensure UE transmit timing is stable at the end of this test step, where T=DL_timing_change[Ts]/[5.5+TT]Ts and DL_timing_change is specified in Table 14.3.1.1.4.2-1.

8. Once the UE transmit timing is within the limits specified in step 7, the test system shall verify that the UE transmit timing offset is within $\left(N_{\mathrm{TA}} + N_{\mathrm{TA\text{-}offset}} + N_{\mathrm{TA,adj}}^{\mathrm{common}} + N_{\mathrm{TA,adj}}^{\mathrm{UE}}\right) \times T_c \pm \left(T_{\mathrm{e_NTN}} - T_{\mathrm{GNSS_margin}}\right)$ of the first detected path of DL SSB (similar to test step 5). For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

9. The SS shall transmit an *RRCRelease* message to release the UE from the NR cell.

14.3.1.1.4.3 Message contents

Editor's Note: Message contents are FFS

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.3.1.1.4.3-0: Common Exception messages for NR SA FR1 UE transmit timing accuracy for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	FFS

Table 14.3.1.1.4.3-1: *SRS-Config* for NR SA FR1 UE transmit timing accuracy for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-182

Information Element	Value/remark	Comment	Condition
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {			
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {			
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	14		
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
sl1	0		Test 1
sl320	3		Test 2
}			
}			
}			
}			
}			
}			

Table 14.3.1.1.4.3-2: *DRX-Config* for NR SA FR1 UE transmit timing accuracy for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-56			
Information Element	**Value/remark**	**Comment**	**Condition**
DRX-Config ::= CHOICE {			
drx-InactivityTimer	ms1		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms320	0		
}			
}			

14.3.1.1.5 Test Requirements

Tables 14.3.1.1.5-1, 14.3.1.1.5-2, 14.3.1.1.5-3, 14.3.1.1.5-4 and 14.3.1.1.5-5 define the primary level settings including test tolerances for NR SA FR1 UE transmit timing accuracy for Satellite Access.

Table 14.3.1.1.5-1: Cell Specific Test Parameters for NR SA FR1 UE transmit timing accuracy for Satellite Access

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1,2	1	1
Serving satellite configuration		1	SSC.1	
		2	SSC.2	
$BW_{channel}$	MHz	1,2	10: $N_{RB,c}$ = 52	
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1	
DRX Cycle	ms	1,2	N/A	DRX.8[Note5]

PDSCH Reference measurement channel		1,2	SR.1.1 FDD	
RMSI CORESET Reference Channel		1,2	CR.1.1 FDD	
Dedicated CORESET Reference Channel		1,2	CCR.1.1 FDD	
OCNG Patterns		1,2	OP.1	
SSB configuration		1,2	SSB.1 FR1	
SMTC Configuration		1,2	SMTC.1	
TRS configuration		1,2	TRS.1.1 FDD	
EPRE ratio of PSS to SSS	dB	1,2	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15 kHz	1,2	-98+TT	-98+TT
N_{oc} Note2	dBm/SCS	1,2	-98+TT	-98+TT
$\hat{E}_s / I_{ot}$		1,2	3+TT	3+TT
$\hat{E}_s / N_{oc}$		1,2	3+TT	3+TT
SS-RSRP Note3	dBm/SCS	1,2	-95+TT	-95+TT
Io Note3	dBm/9.36MHz	1,2	-65.2+TT	-65.2+TT
Propagation condition		1,2	AWGN	
SRS Config		1,2	SRSConf.1 Note6	SRSConf.2 Note6

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: DRX related parameters are given in Table 14.3.1.1.5-3
Note 6: SRS configs are given in Table 14.3.1.1.5-2

Table 14.3.1.1.5-2: SRS Configuration for NR SA FR1 UE transmit timing accuracy for Satellite Access

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	

	freqHopping c-SRS	14	14	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl320, 3	Offset to align with DRX periodicity
	sequenceId	0	0	Any 10 bit number

Table 14.3.1.1.5-3: DRX-Configuration for NR SA FR1 UE transmit timing accuracy for Satellite Access

Field	Test 2
	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
longDRX-CycleStartOffset	320 ms
shortDRX	Disabled
TimeAlignmentTimer	Infinity
Note: The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [13]	

Table 14.3.1.1.5-4: T_e Timing Error Limit for NR SA FR1 UE transmit timing accuracy for Satellite Access

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_{e_NTN}
1	15	15	(29+TT)*64*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [7]			

Table 14.3.1.1.5-5: T_{q_NTN} Maximum Autonomous Time Adjustment Step and T_{p_NTN} Minimum Aggregate Adjustment rate for NR SA FR1 UE transmit timing accuracy for Satellite Access

Frequency Range	SCS of uplink signals (kHz)	T_{q_NTN}	T_{p_NTN}
1	15	(5.5+TT)*64*T_c	(5.5+TT)*64*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [7]			

14.3.2 Timing Advance for Satellite Access

14.3.2.0 Minimum conformance requirements

UE shall adjust the timing of its uplink transmission timing from the beginning of uplink time slot $n+ k+1+2^{\mu} \cdot K_{\text{offset}}$ for a timing advance command received in time slot n, and the value of k, μ and K_{offset} are defined in clause 4.2 in TS 38.213 [8]. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

The normative reference for this requirement is TS.38.133 [6] clause 7.3C.2.1.

14.3.2.0.1 Minimum conformance requirements for UE Timing Advance adjustment accuracy

The UE shall adjust the timing of its transmissions, apart from a change of $N_{\mathrm{TA,adj}}^{\mathrm{UE}}$ and $N_{\mathrm{TA,adj}}^{\mathrm{common}}$ between the preceding uplink transmission and the current transmission, with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 14.3.2.0.1-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS 38.213 [8].

Table 14.3.2.0.1-1: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	15	30	60
UE Timing Advance adjustment accuracy	±256 T_c	±256 T_c	N/A

The normative reference for this requirement is TS.38.133 [6] clause 7.3C.2.2

14.3.2.1 NR SA FR1 Timing Advance adjustment accuracy for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS

14.3.2.1.1 Test purpose

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 14.3.2.0.

14.3.2.1.2 Test applicability

This test applies to all types of NR UE from Release 17 and onwards supporting satellite access.

14.3.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 14.3.2.0.1 and 14.3.2.0.2.

The normative reference for this requirement is 38.133 [6] clause A.14.3.2.1

14.3.2.1.4 Test Description

In all test cases, single cell served by SAN is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table 14.3.2.1.5-2, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

The UE shall be provided with the valid information about the SAN serving cell before the test. During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [12]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [8] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in Table 14.3.2.1.4.1-3. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

The UE shall adjust its uplink timing at slot n+k+$1+2^{\mu}\cdot K_{\text{offset}}$ for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

14.3.2.1.4.1 Initial Conditions

This test shall be tested in one of the configurations defined in Table 14.3.2.1.4.1-1.

Table 14.3.2.1.4.1-1: Supported test configurations for NR SA FR1 Timing Advance adjustment accuracy for Satellite Access

Configuration	Description
14.3.2.1-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.3.2.1-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Configure the test equipment and the DUT according to the parameters in Table 14.3.2.1.4.1-2

Table 14.3.2.1.4.1-2: Initial conditions for NR SA FR1 Timing Advance adjustment accuracy for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

1. Message contents are defined in clause 14.3.2.1.4.3.
2. Cell 1 is the NR PCell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 1 is a satellite access cell.
3. The initial test environment conditions are setup according to section 14.0.5.

Table 14.3.2.1.4.1-3: General test parameters for NR SA FR1 Timing Advance adjustment accuracy for Satellite Access

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.8.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.8.1-2
Initial UL BWP		ULBWP.0.1	As specified in Table A.8.2-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.8.2-2
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192*T_c$ (based on equation in clause 4.2 of TS 38.213 [8])
T1	s	5	
T2	s	5	

14.3.2.1.4.2 Test procedure

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [12], shall be configured so that it does not expire in the duration of the test.

1. Ensure the UE is in [state RRC_CONNECTED with generic procedure parameters *Connectivity* NR, Connected without release *On* according to TS 38.508-1 [6] clause 4.5]. Cell 1 is the active cell.
2. Set up NR Cell according to parameters given in Table 14.3.2.1.5-1.
3. The SS shall transmit an *RRCReconfiguration* message configuring the UE with periodic SRS transmissions according to clause 14.3.2.1.4.3.
4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
5. During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element with value set to 31. This results in zero adjustment of the Timing Advance, and therefore establishes a reference value for the timing advance used by the UE. T2 starts once T1 expires.
6. During time period T2, the test equipment shall send Timing Advance command MAC Control Elements, with a Timing Advance value of 39 as specified in table 14.3.2.1.4.1-3. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.
7. The UE shall adjust its uplink timing at slot $n+ k+1+2^{\mu} \cdot K_{\text{offset}}$ for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.
8. The result from the SRS and adjustment of the timing advance in step 7) is used to measure whether the UE adjusts the timing of its transmission with a relative accuracy better than or equal to value specified in Table 14.3.2.1.5-3 to the signalled timing advance value compared to the timing of preceding uplink transmission. If the UE adjusts its timing within the requirement, the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
9. The SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
10. After the RRC connection is released, the SS shall switch OFF and then ON the UE to proceed with the next iteration.
11. Repeat step 1-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.3.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.3.2.1.4.3-0: Common Exception messages for NR SA FR1 Timing Advance adjustment accuracy for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	FFS

Table 14.3.2.1.4.3-1: *SRS-Config* for NR SA FR1 Timing Advance adjustment accuracy for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			

srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SEQUENCE {	1 entry		
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SEQUENCE {	1 entry		
SRS-Resource[1] SEQUENCE {		entry 1	
freqHopping SEQUENCE {			
c-SRS	12		
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
sl5	2	Once every 5 slots	
}			
}			
}			
}			
}			
}			

14.3.2.1.5 Test Requirements

Tables 14.3.2.1.5-1 and 14.3.2.1.5-2 define the primary level settings including test tolerances for NR SA FR1 Timing Advance adjustment accuracy for Satellite Access.

Table 14.3.2.1.5-1: Cell Specific Test Parameters for NR SA FR1 Timing Advance adjustment accuracy for Satellite Access

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1,2		FDD	
Satellite information	Config 1		SSC.1	
	Config 2		SSC.2	
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52	
BWP BW	Config 1,2	MHz	10: $N_{RB,c}$ = 52	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2		SR.1.1 FDD	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	
TRS configuration	Config 1,2		TRS.1.1 FDD	
OCNG Patterns			OCNG pattern 1	
SMTC configuration	Config 1,2		SMTC.1 FR1	
SSB configuration	Config 1,2		SSB.1 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				

EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note2		dBm/15kHz	-98+TT
N_{oc} Note2	Config 1,2	dBm/SCS	-98+TT
$\hat{E}_s / I_{ot}$		dB	3+TT
$\hat{E}_s / N_{oc}$		dB	3+TT
Io Note3	Config 1,2	dBm/ 9.36MHz	-67.57+TT
Propagation condition		-	AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 14.3.2.1.5-2: SRS Configuration for NR SA FR1 Timing Advance adjustment accuracy for Satellite Access

Field		Value	Comment
c-SRS	Config 1,2	12	Frequency hopping is disabled
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5=2 for SCS 15kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].			

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. $k+1+2^{\mu} \cdot K_{\text{offset}}$ slots after the reception of the timing advance command, where k=5.

The Timing Advance adjustment accuracy shall be within the limits specified in Table 14.3.2.1.5-3.

Table 14.3.2.1.5-3: UE Timing Advance adjustment accuracy for NR SA FR1 Timing Advance adjustment accuracy for Satellite Access

Sub Carrier Spacing, SCS kHz	15
UE Timing Advance adjustment accuracy	±256+TT T_c

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

14.4 Signalling characteristics

14.4.1 Radio link monitoring for Satellite Access

14.4.1.0 General

The requirements in this clause apply for radio link monitoring on PCell and the UE is configured with only PCell, which is served by satellite access node (SAN).The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell as specified in TS 38.213 [8]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell.

The threshold Q_{out} is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out}$) as defined in Table 14.4.1.0-1. For SSB based radio link monitoring, Q_{out_SSB} is derived based on the hypothetical PDCCH transmission parameters listed in Table 14.4.1.0.1-1. For CSI-RS based radio link monitoring, Q_{out_CSI-RS} is derived based on the hypothetical PDCCH transmission parameters listed in Table 14.4.1.0.2-1.

The threshold Q_{in} is defined as the level at which the downlink radio link quality can be received with significantly higher reliability than at Q_{out} and shall correspond to the in-sync block error rate ($BLER_{in}$) as defined in Table 14.4.1.0-1. For SSB based radio link monitoring, Q_{in_SSB} is derived based on the hypothetical PDCCH transmission parameters listed in Table 14.4.1.0.1-2. For CSI-RS based radio link monitoring, Q_{in_CSI-RS} is derived based on the hypothetical PDCCH transmission parameters listed in Table 14.4.1.0.2-2.

The out-of-sync block error rate ($BLER_{out}$) and in-sync block error rate ($BLER_{in}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *rlmInSyncOutOfSyncThreshold* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 14.4.1.0-1 by default. All requirements in this clause are applicable for BLER Configuration #0 in Table 14.4.1.0-1.

Table 14.4.1.0-1: Out-of-sync and in-sync block error rates

Configuration	$BLER_{out}$	$BLER_{in}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [8], where N_{RLM} is specified in Table 14.4.1.0-2 according TS 38.213 [8], and meet the requirements as specified in this clause. UE is not required to meet the requirements in this clause if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 14.4.1.0-2: Maximum number of RLM-RS resources N_{RLM}

Carrier frequency range of PCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1, ≤ 3 GHz[Note]	4	2
FR1, > 3 GHz[Note]	8	4
NOTE: For unpaired spectrum operation with Case C - 30 kHz SCS, 3GHz is replaced by 1.88GHz, as specified in clause 4.1 in TS 38.213 [8].		

The normative reference for this requirement is TS 38.133 [6] clause 8.1C.1.

14.4.1.0.1 Minimum conformance requirements for SSB based Radio Link Monitoring for Satellite Access

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell, provided that the SSB configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 14.4.1.0.1.

Table 14.4.1.0.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 14.4.1.0.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB}$ [ms] period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_SSB}$ [ms] period becomes better than the threshold Q_{in_SSB} within $T_{Evaluate_in_SSB}$ [ms] evaluation period.

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in Table 14.4.1.0.1-1 for FR1.

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
- $N_{total} / N_{available}$ with $N_{available} > 0$

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is
  - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
  - same as $N_{outside_MG}$, otherwise
- T_{L1} is periodicity of the target RLM-RS
- $P_{sharing\ factor} = 3$.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Table 14.4.1.0.1-1: Evaluation period $T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ for FR1

Configuration	$T_{Evaluate_out_SSB}$ (ms)	$T_{Evaluate_in_SSB}$ (ms)
no DRX	Max(200, Ceil(10 × P) × T_{SSB})	Max(100, Ceil(5 × P) × T_{SSB})
DRX cycle≤320ms	Max(200, Ceil(15 × P) × Max(T_{DRX},T_{SSB}))	Max(100, Ceil(7.5 × P) × Max(T_{DRX},T_{SSB}))
DRX cycle>320ms	Ceil(10 × P) × T_{DRX}	Ceil(5 × P) × T_{DRX}
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

The normative reference for this requirement is TS 38.133 [6] clause 8.1C.2.1 and 8.1C.2.2.

14.4.1.0.1.1 Measurement restrictions for SSB based RLM for Satellite Access

The UE is required to be capable of measuring SSB for RLM without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for RLM is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

The normative reference for this requirement is TS 38.133 [6] clause 8.1C.2.3.

14.4.1.0.2 Minimum conformance requirements for CSI-RS based Radio Link Monitoring for Satellite Access

The requirements in this clause apply for each CSI-RS based RLM-RS resource configured for PCell, provided that the CSI-RS configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period

specified in clause 14.4.1.0.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

Table 14.4.1.0.2-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	4dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 14.4.1.0.2-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI-RS}$ ms period becomes worse than the threshold Q_{out_CSI-RS} within $T_{Evaluate_out_CSI-RS}$ ms evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_CSI-RS}$ ms period becomes better than the threshold Q_{in_CSI-RS} within $T_{Evaluate_in_CSI-RS}$ ms evaluation period.

- $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ are defined in Table 14.4.1.0.2-1 for FR1.

The requirements of $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ apply provided that the CSI-RS for RLM is not in a resource set configured with repetition ON. The requirements do not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for RLM and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
- $N_{total} / N_{available}$ with $N_{available} > 0$

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is
  - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
  - same as $N_{outside_MG}$, otherwise
- T_{L1} is periodicity of the target RLM-RS
- $P_{sharing\ factor}$ = 3.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

The values of M_{out} and M_{in} used in Table 14.4.1.0.2-1 are defined as:

- M_{out} = 20 and M_{in} = 10, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth $\geq$ 24 PRBs.

Table 14.4.1.0.2-1: Evaluation period $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ for FR1

Configuration	$T_{Evaluate_out_CSI-RS}$ (ms)	$T_{Evaluate_in_CSI-RS}$ (ms)
no DRX	Max(200, Ceil(M_{out}×P)×T_{CSI-RS})	Max(100, Ceil(M_{in}×P) × T_{CSI-RS})
DRX ≤ 320ms	Max(200, Ceil(1.5×M_{out}×P)× Max(T_{DRX}, T_{CSI-RS}))	Max(100, Ceil(1.5×M_{in}×P)× Max(T_{DRX}, T_{CSI-RS}))
DRX > 320ms	Ceil(M_{out}×P) × T_{DRX}	Ceil(M_{in}×P) × T_{DRX}
NOTE: T_{CSI-RS} is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

The normative reference for this requirement is TS 38.133 [6] clause 8.1C.3.1 and 8.1C.3.2.

14.4.1.0.2.1 Measurement restrictions for SSB based RLM for Satellite Access

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS for RLM measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for RLM without any restriction.

The normative reference for this requirement is TS 38.133 [6] clause 8.1C.3.3.

14.4.1.1 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Editor's Note: This test is complete, but the following aspect needs to be updated:

- Modified parameters for RLM testing with 4RX antenna connection are not specified in TS 38.133

14.4.1.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the SAN PCell when no DRX is used. This test will partly verify the FR1 PCell SSB based radio link monitoring requirements in clause 14.4.1.0.

14.4.1.1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.4.1.1.3 Minimum conformance requirement

The minimum requirements are specified in clause 14.4.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.1.1.

14.4.1.1.4 Test description

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 14.4.1.1.4.1-1. The test parameters are given in Tables 14.4.1.1.4.1-3, 14.4.1.1.5-1, and 14.4.1.1.5-2 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test.

The test consists of three successive time periods, with time duration of T1, T2 and T3, respectively. Figure 14.4.1.1.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40 ms) in the test.

The UE shall be provided with valid information about the SAN serving each cell in the test before the test.

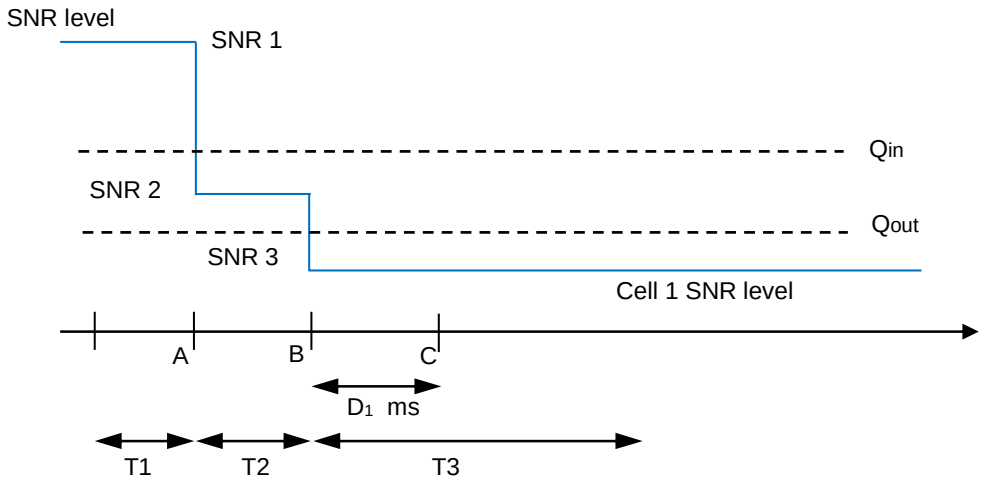

Figure 14.4.1.1.4-1: SNR variation for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

14.4.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.1.1.4.1-1.

Table 14.4.1.1.4.1-1: Supported test configurations for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Configuration	Description
14.4.1.1-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.4.1.1-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.4.1.1.4.1-2.

Table 14.4.1.1.4.1-2: Initial conditions for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.4.1.1.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.1.1.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.1.1.4.1-3: General test parameters for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
$BW_{channel}$		Config 1, 2	MHz	10: $N_{RB,c}$ = 52
DL initial BWP configuration		Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2		DLBWP.1.1
UL initial BWP configuration		Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel		Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel		Config 1, 2		CCR.1.3 FDD
SSB Configuration		Config 1, 2		SSB.1 FR1
SMTC Configuration		Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2		15 kHz
PRACH Configuration		Config 1, 2		PRACH.1 FR1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				*gp0*
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS configuration for CSI reporting		Config 1, 2		CSI-RS.1.1 FDD
CSI-RS for tracking		Config 1, 2		TRS.1.1 FDD
T1			s	0.2
T2			s	0.48
T3			s	0.48
D1			s	0.44

Note 1: All configurations are assigned to the UE prior to the start of time period T1.
Note 2: UE-specific PDCCH is not transmitted after T1 starts.

14.4.1.1.4.2 Test Procedure

The test consists of a single satellite access NR cell (PCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to the PCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 14.4.1.1.4.1-3.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. The SS sends an *RRCReconfiguration* message to the UE to configure inter-frequency measurement with the corresponding gap pattern and periodic CSI reporting.
3. The UE sends an *RRCReconfigurationComplete* message.
4. Set the parameters of NR Cell according to T1 in Table 14.4.1.1.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.1.1.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.1.1.5-1. T3 starts.
7. If the SS:

a) detects uplink power equal to or higher than minimum output power in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point B; and

b) does not detect any uplink power higher than OFF power from time point C (D1 after the start of T3) until T3 expires, the number of successful tests is increased by one.

Otherwise, the number of failed tests is increased by one and proceed with step 10.

8. When T3 expires the SS shall change the SNR value to T1 as specified in Table 14.4.1.1.5-1.
9. If the UE has re-established the connection within 2 seconds, proceed with step 11. Otherwise, proceed with step 10.
10. The SS shall switch off and then on the UE and then proceed with step 1.
11. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.3 is achieved.

14.4.1.1.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 14.4.1.1.4.3-1: Common Exception messages for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-6 with conditions gapUE and RLM Table H.3.1-8 with Condition SSB RLM Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.1.1.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

14.4.1.1.5 Test Requirement

Table 14.4.1.1.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access.

Table 14.4.1.1.5-1: Cell-specific test parameters for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Parameter		**Unit**	**Test 1**		
			T1	**T2**	**T3**
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8
	Config 2		1.8	-6.2	-15.8
N_{oc}	Config 1	dBm/ 15kHz	-98		
	Config 2		-98		
N_{oc}	Config 1	dBm/ SCS	-98		
	Config 2		-98		
Propagation condition			NTN-TDLC5-200		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure 14.4.1.1.4-1.					

Table 14.4.1.1.5-2: Measurement gap configuration for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Field	**Test 1**
	Value
gapOffset	0
NOTE: Ensure that RLM RS is partially overlapped with measurement gap0	

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

- During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

- The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

14.4.1.2 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Editor's Note: This test is complete, but the following aspect needs to be updated:

- Modified parameters for RLM testing with 4RX antenna connection are not specified in TS 38.133

14.4.1.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the SAN PCell when no DRX is used. This test will partly verify the FR1 PCell SSB based radio link monitoring requirements in clause 14.4.1.0.

14.4.1.2.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.4.1.2.3 Minimum conformance requirement

The minimum requirements are specified in clause 14.4.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.1.2.

14.4.1.2.4 Test description

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 14.4.1.2.4.1-1. The test parameters are given in Tables 14.4.1.2.4.1-3 and 14.4.1.2.5-1 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5, respectively. Figure 14.4.1.2.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

The UE shall be provided with valid information about the SAN serving each cell in the test before the test.

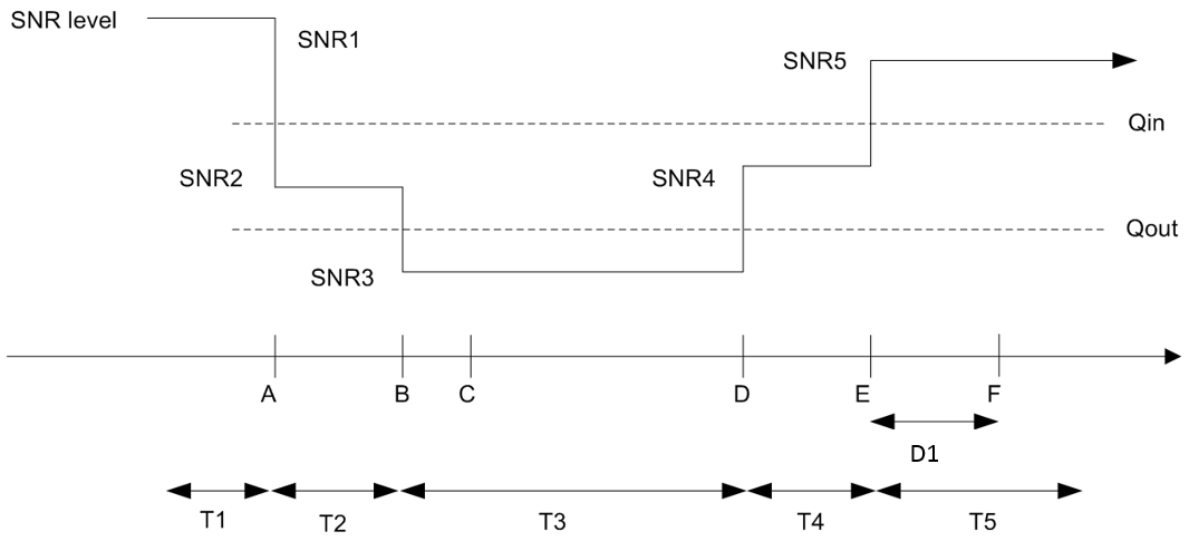

Figure 14.4.1.2.4-1: SNR variation for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

14.4.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.1.2.4.1-1.

Table 14.4.1.2.4.1-1: Supported test configurations for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Configuration	Description
14.4.1.2-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.4.1.2-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.4.1.2.4.1-2.

Table 14.4.1.2.4.1-2: Initial conditions for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.4.1.2.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.1.2.4.1-3.

4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.1.2.4.1-3: General test parameters for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
$BW_{channel}$		Config 1, 2	MHz	10: $N_{RB,c}$ = 52
DL initial BWP configuration		Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2		DLBWP.1.1
UL initial BWP configuration		Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel		Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel		Config 1, 2		CCR.1.1 FDD
SSB Configuration		Config 1, 2		SSB.1 FR1
SMTC Configuration		Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2		15 kHz
PRACH Configuration		Config 1, 2		PRACH.1 FR1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4

	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

14.4.1.2.4.2 Test Procedure

The test consists of a single satellite access NR cell (PCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to the PCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 14.4.1.2.4.1-3.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. The SS sends an *RRCReconfiguration* message to the UE to configure periodic CSI reporting.
3. The UE sends an *RRCReconfigurationComplete* message.
4. Set the parameters of NR Cell according to T1 in Table 14.4.1.2.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.1.2.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.1.2.5-1. T3 starts.
7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 14.4.1.2.5-1. T4 starts.
8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 14.4.1.2.5-1. T5 starts.
9. If the SS detects uplink power equal to or higher than minimum output power in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point F (D1 seconds after the start of time duration T5), the number of successful tests is increased by one. After the expiration of T5, the SS shall proceed with step 11 for the next iteration, or with step 10.

Otherwise, the number of failed tests is increased by one and proceed with step 10.

10. The SS shall switch off and then on the UE and then proceed with step 1.
11. Repeat steps 4-9 until the confidence level according to Annex G clause G.2.3 is achieved.

14.4.1.2.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 14.4.1.2.4.3-1: Common Exception messages for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition L3 FILTERING NEEDED Table H.3.1-3 with Condition RLM Table H.3.1-8 with Condition SSB RLM Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.1.2.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms1000		
n310	n1		
t311	ms1000		
n311	n1		
}			

14.4.1.2.5 Test Requirement

Table 14.4.1.2.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access.

Table 14.4.1.2.5-1: Cell-specific test parameters for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8	-5.3	1.8
	Config 2		1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				
N_{oc}	Config 1	dBm/SCS	-98				
	Config 2		-98				
Propagation condition			NTN-TDLC5-200				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 14.4.1.2.4-1.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

14.4.1.3 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Editor's Note: This test is complete, but the following aspect needs to be updated:

- Modified parameters for RLM testing with 4RX antenna connection are not specified in TS 38.133

14.4.1.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 PCell SSB based radio link monitoring requirements in clause 14.4.1.0.

14.4.1.3.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and long DRX.

14.4.1.3.3 Minimum conformance requirement

The minimum requirements are specified in clause 14.4.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.1.3.

14.4.1.3.4 Test description

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 14.4.1.3.4.1-1. The test parameters are given in Tables 14.4.1.3.4.1-3, 14.4.1.3.5-1, and 14.4.1.3.5-2 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test.

The test consists of three successive time periods, with time duration of T1, T2 and T3, respectively. Figure 14.4.1.3.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

The UE shall be provided with valid information about the SAN serving each cell in the test before the test.

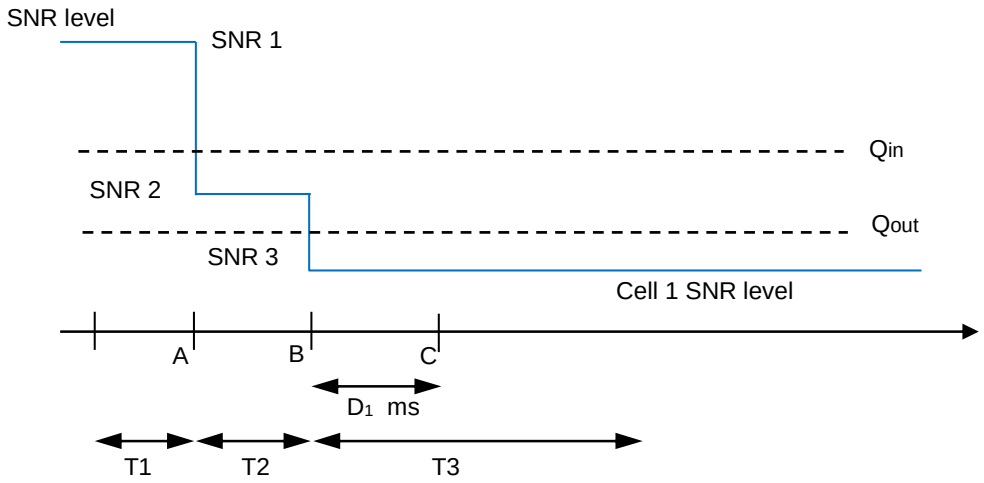

Figure 14.4.1.3.4-1: SNR variation for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

14.4.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.1.3.4.1-1.

Table 14.4.1.3.4.1-1: Supported test configurations for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Configuration	Description
14.4.1.3-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.4.1.3-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.4.1.3.4.1-2.

Table 14.4.1.3.4.1-2: Initial conditions for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.4.1.3.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.1.3.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.1.3.4.1-3: General test parameters for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
$BW_{channel}$	Config 1, 2		MHz	10: $N_{RB,c}$ = 52
DL initial BWP configuration	Config 1, 2			DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2			DLBWP.1.1
UL initial BWP configuration	Config 1, 2			ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2			ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2			CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2			CCR.1.3 FDD
SSB Configuration	Config 1, 2			SSB.1 FR1
SMTC Configuration	Config 1, 2			SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2			15 kHz
PRACH Configuration	Config 1, 2			PRACH.1 FR1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
Out of sync transmission parameters		DCI format		1-0
		Number of Control OFDM symbols		2
		Aggregation level	CCE	8
		Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
		Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
		DMRS precoder granularity		REG bundle size
		REG bundle size		6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1

CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

14.4.1.3.4.2 Test Procedure

The test consists of a single satellite access NR cell (PCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to the PCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 14.4.1.3.4.1-3.

In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. The SS sends an *RRCReconfiguration* message to the UE to configure periodic CSI reporting and DRX according to section 14.4.1.3.4.3.
3. The UE sends an *RRCReconfigurationComplete* message.
4. Set the parameters of NR Cell according to T1 in Table 14.4.1.3.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.1.3.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.1.3.5-1. T3 starts.
7. If the SS:

   a) detects uplink power equal to or higher than minimum output power in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point B; and

   b) does not detect any uplink power higher than OFF power from time point C (D1 after the start of T3) until T3 expires, the number of successful tests is increased by one.

   Otherwise, the number of failed tests is increased by one and proceed with step 10.
8. When T3 expires the SS shall change the SNR value to T1 as specified in Table 14.4.1.3.5-1.
9. If the UE has re-established the connection within 2 seconds, proceed with step 11. Otherwise, proceed with step 10.
10. The SS shall switch off and then on the UE and then proceed with step 1.
11. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.3 is achieved.

14.4.1.3.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 14.4.1.3.4.3-1: Common Exception messages for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition L3 FILTERING NEEDED, Table H.3.1-3 with Condition RLM Table H.3.1-8 with Condition SSB RLM Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table H.3.7-1 with condition DRX.3 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.1.3.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

14.4.1.3.5 Test Requirement

Table 14.4.1.3.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access.

Table 14.4.1.3.5-1: Cell-specific test parameters for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8
	Config 2		1.8	-6.2	-15.8
N_{oc}	Config 1	dBm/15 kHz	-98		
	Config 2		-98		
N_{oc}	Config 1	dBm/SCS	-98		
	Config 2		-98		
Propagation condition			NTN-TDLC5-200		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure 14.4.1.3.4-1.

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

- During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.
- The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

14.4.1.4 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Editor's Note: This test is complete, but the following aspect needs to be updated:

- Modified parameters for RLM testing with 4RX antenna connection are not specified in TS 38.133

14.4.1.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 PCell SSB based radio link monitoring requirements in clause 14.4.1.0.

14.4.1.4.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and long DRX.

14.4.1.4.3 Minimum conformance requirement

The minimum requirements are specified in clause 14.4.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.1.4.

14.4.1.4.4 Test description

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 14.4.1.4.4.1-1. The test parameters are given in Tables 14.4.1.4.4.1-3 and 14.4.1.4.5-1 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5, respectively. Figure 14.4.1.4.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

The UE shall be provided with valid information about the SAN serving each cell in the test before the test.

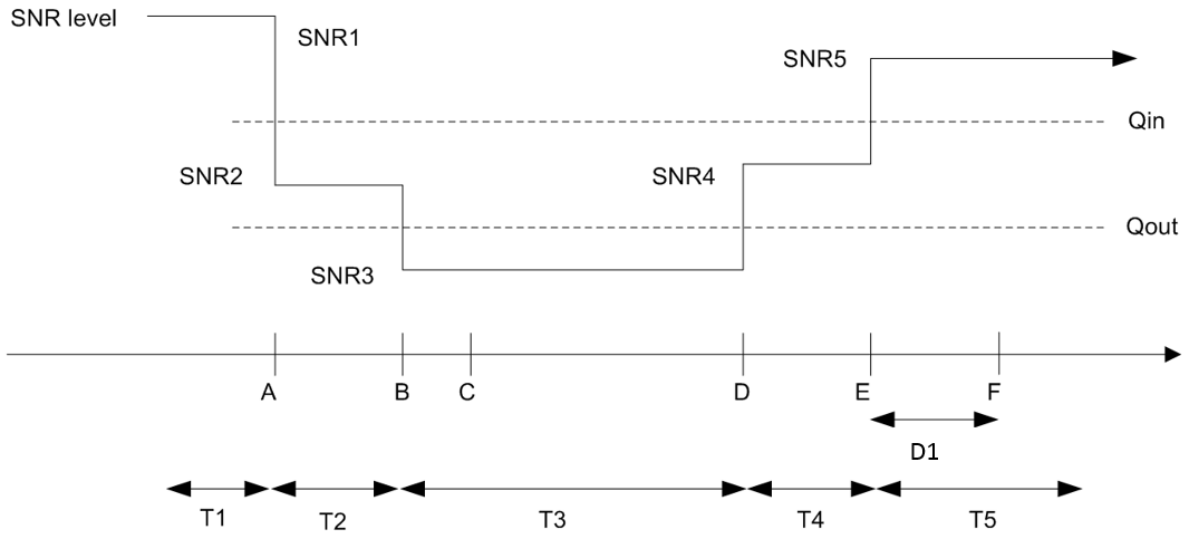

Figure 14.4.1.4.4-1: SNR variation for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

14.4.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.1.4.4.1-1.

Table 14.4.1.4.4.1-1: Supported test configurations for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Configuration	Description
14.4.1.4-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.4.1.4-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.4.1.4.4.1-2.

Table 14.4.1.4.4.1-2: Initial conditions for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.1.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.4.1.4.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.1.4.4.1-3.

4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.1.4.4.1-3: General test parameters for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
$BW_{channel}$		Config 1, 2	MHz	10: $N_{RB,c}$ = 52
DL initial BWP configuration		Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2		DLBWP.1.1
UL initial BWP configuration		Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel		Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel		Config 1, 2		CCR.1.1 FDD
SSB Configuration		Config 1, 2		SSB.1 FR1
SMTC Configuration		Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2		15 kHz
PRACH Configuration		Config 1, 2		PRACH.1 FR1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4

	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

14.4.1.4.4.2 Test Procedure

The test consists of a single satellite access NR cell (PCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to the PCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 14.4.1.4.4.1-3.

In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. The SS sends an *RRCReconfiguration* message to the UE to configure periodic CSI reporting and DRX according to section 14.4.1.4.4.3.
3. The UE sends an *RRCReconfigurationComplete* message.
4. Set the parameters of NR Cell according to T1 in Table 14.4.1.4.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.1.4.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.1.4.5-1. T3 starts.
7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 14.4.1.4.5-1. T4 starts.
8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 14.4.1.4.5-1. T5 starts.
9. If the SS detects uplink power equal to or higher than minimum output power in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point F (D1 seconds after the start of time duration T5), the number of successful tests is increased by one. After the expiration of T5, the SS shall proceed with step 11 for the next iteration, or with step 10.

Otherwise, the number of failed tests is increased by one and proceed with step 10.

10. The SS shall switch off and then on the UE and then proceed with step 1.
11. Repeat steps 4-9 until the confidence level according to Annex G clause G.2.3 is achieved.

14.4.1.4.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 14.4.1.4.4.3-1: Common Exception messages for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition L3 FILTERING NEEDED Table H.3.1-3 with Condition RLM Table H.3.1-8 with Condition SSB RLM Table H.3.5-4 Table H.3.5-9 with Condition SSB RLM Table H.3.7-1 with condition DRX.3 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.1.4.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms2000		
n310	n1		
t311	ms1000		
n311	n1		
}			

14.4.1.4.5 Test Requirement

Table 14.4.1.4.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access.

Table 14.4.1.4.5-1: Cell-specific test parameters for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1.8	-6.2	-15.8	-5.3	1.8
	Config 2		1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				
N_{oc}	Config 1	dBm/SCS	-98				
	Config 2		-98				

Propagation condition		NTN-TDLC5-200
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.	
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.	
Note 4:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 14.4.1.4.4-1.	

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

14.4.1.5 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Editor's Note: This test is complete, but the following aspect needs to be updated:

- Modified parameters for RLM testing with 4RX antenna connection are not specified in TS 38.133

14.4.1.5.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS based radio link monitoring requirements in clause 14.4.1.0.

14.4.1.5.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and CSI-RS based RLM.

14.4.1.5.3 Minimum conformance requirement

The minimum requirements are specified in clause 14.4.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.1.5.

14.4.1.5.4 Test description

In the test, UE is configured to perform RLM based on CSI-RS, with *detectionResource* included in *RadioLinkMonitoringRS* set to CSI-RS, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 14.4.1.5.4.1-1. The test parameters are given in Tables 14.4.1.5.4.1-3, 14.4.1.5.5-1, and 14.4.1.5.5-2 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test.

The test consists of three successive time periods, with time duration of T1, T2 and T3, respectively. Figure 14.4.1.5.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40 ms) in the test.

The UE shall be provided with valid information about the SAN serving each cell in the test before the test.

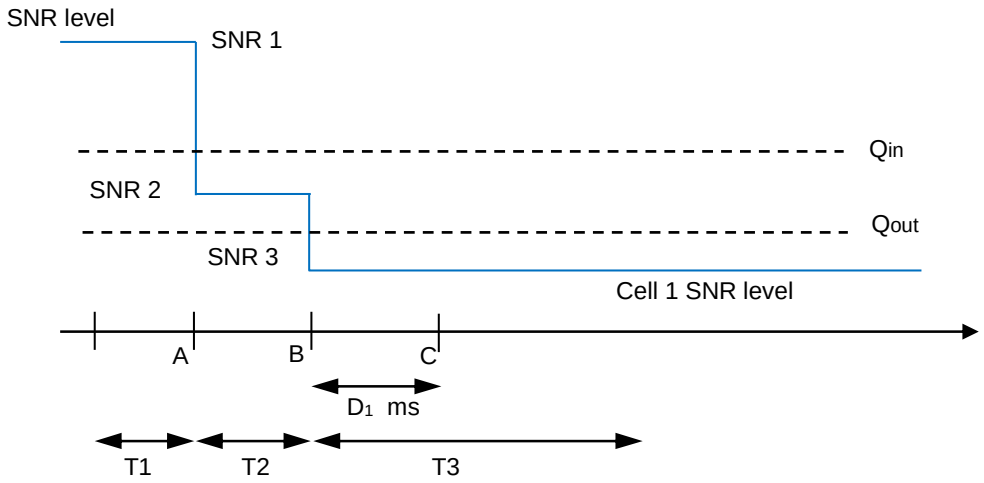

Figure 14.4.1.5.4-1: SNR variation for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

14.4.1.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.1.5.4.1-1.

Table 14.4.1.5.4.1-1: Supported test configurations for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Configuration	Description
14.4.1.5-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.4.1.5-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note:	If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.

Configure the test equipment and the DUT according to the parameters in Table 14.4.1.5.4.1-2.

Table 14.4.1.5.4.1-2: Initial conditions for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.1.5.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.4.1.5.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.1.5.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.1.5.4.1-3: General test parameters for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.3 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
TRS configuration	Config 1, 2		TRS.1.1 FDD
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

14.4.1.5.4.2 Test Procedure

The test consists of a single satellite access NR cell (PCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to the PCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 14.4.1.5.4.1-3.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. The SS sends an *RRCReconfiguration* message to the UE to configure inter-frequency measurement with the corresponding gap pattern and periodic CSI reporting.
3. The UE sends an *RRCReconfigurationComplete* message.
4. Set the parameters of NR Cell according to T1 in Table 14.4.1.5.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.1.5.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.1.5.5-1. T3 starts.
7. If the SS:

a) detects uplink power equal to or higher than minimum output power in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point B; and

b) does not detect any uplink power higher than OFF power from time point C (D1 after the start of T3) until T3 expires, the number of successful tests is increased by one.

Otherwise, the number of failed tests is increased by one and proceed with step 10.

8. When T3 expires the SS shall change the SNR value to T1 as specified in Table 14.4.1.5.5-1.
9. If the UE has re-established the connection within 2 seconds, proceed with step 11. Otherwise, proceed with step 10.
10. The SS shall switch off and then on the UE and then proceed with step 1.
11. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.3 is achieved.

14.4.1.5.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 14.4.1.5.4.3-1: Common Exception messages for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-6 with conditions gapUE and RLM Table H.3.1-8 with Condition CSI-RS RLM Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.1.5.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

14.4.1.5.5 Test Requirement

Table 14.4.1.5.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access.

Table 14.4.1.5.5-1: Cell-specific test parameters for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Parameter		**Unit**	**Test 1**		
			T1	**T2**	**T3**
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB			
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 2	dB	1.8	-6.2	-15.8
N_{oc}	Config 1, 2	dBm/15kHz	-98		
Propagation condition			NTN-TDLC5-200		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 14.4.1.5.4-1.

Table 14.4.1.5.5-2: Measurement gap configuration for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Field	**Test 1**
	Value
gapOffset	0
NOTE: Ensure that RLM RS is partially overlapped with measurement gap0	

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

- During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.
- The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

14.4.1.6 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Editor's Note: This test is complete, but the following aspect needs to be updated:

- Modified parameters for RLM testing with 4RX antenna connection are not specified in TS 38.133

14.4.1.6.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS based radio link monitoring requirements in clause 14.4.1.0.

14.4.1.6.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and CSI-RS based RLM.

14.4.1.6.3 Minimum conformance requirement

The minimum requirements are specified in clause 14.4.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.1.6.

14.4.1.6.4 Test description

In the test, UE is configured to perform RLM based on CSI-RS, with *detectionResource* included in *RadioLinkMonitoringRS* set to CSI-RS, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 14.4.1.6.4.1-1. The test parameters are given in Tables 14.4.1.6.4.1-3 and 14.4.1.6.5-1 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5, respectively. Figure 14.4.1.6.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. In the test, DRX configuration is not enabled. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

The UE shall be provided with valid information about the SAN serving each cell in the test before the test.

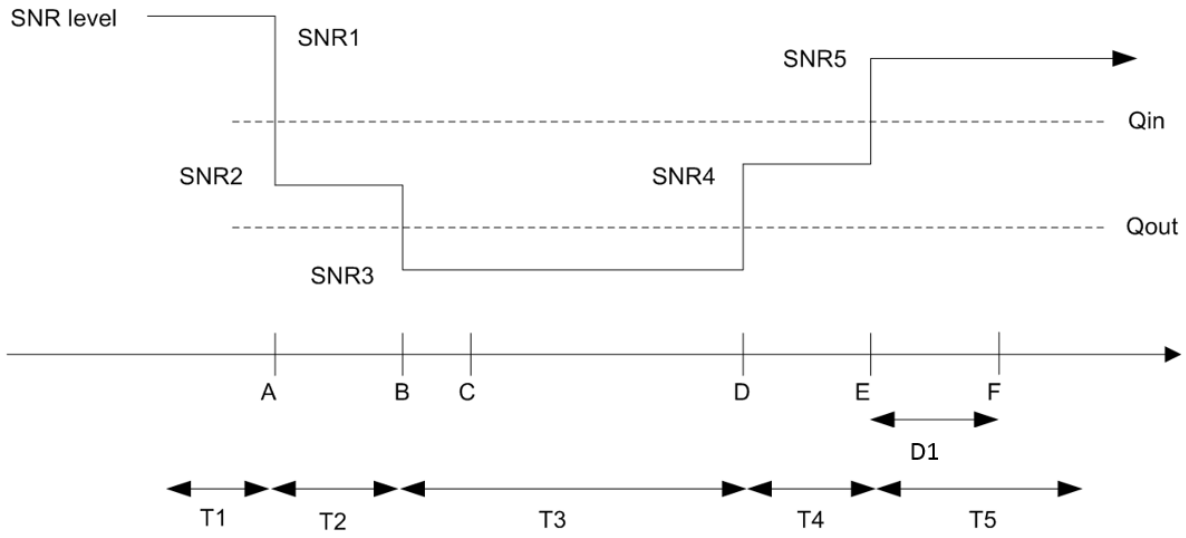

Figure 14.4.1.6.4-1: SNR variation for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

14.4.1.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.1.6.4.1-1.

Table 14.4.1.6.4.1-1: Supported test configurations for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Configuration	Description
14.4.1.6-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.4.1.6-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note:	If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.

Configure the test equipment and the DUT according to the parameters in Table 14.4.1.6.4.1-2.

Table 14.4.1.6.4.1-2: Initial conditions for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.1.6.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.4.1.6.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.1.6.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.1.6.4.1-3: General test parameters for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
TRS configuration	Config 1, 2		TRS.1.1 FDD
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1

CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	0.2
T3		s	0.44
T4		s	0.2
T5		s	0.88
D1		S	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

14.4.1.6.4.2 Test Procedure

The test consists of a single satellite access NR cell (PCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to the PCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 14.4.1.6.4.1-3.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. The SS sends an *RRCReconfiguration* message to the UE to configure periodic CSI reporting.
3. The UE sends an *RRCReconfigurationComplete* message.
4. Set the parameters of NR Cell according to T1 in Table 14.4.1.6.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.1.6.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.1.6.5-1. T3 starts.
7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 14.4.1.6.5-1. T4 starts.
8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 14.4.1.6.5-1. T5 starts.
9. If the SS detects uplink power equal to or higher than minimum output power in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point F (D1 seconds after the start of time duration T5), the number of successful tests is increased by one. After the expiration of T5, the SS shall proceed with step 11 for the next iteration, or with step 10.

Otherwise, the number of failed tests is increased by one and proceed with step 10.

10. The SS shall switch off and then on the UE and then proceed with step 1.
11. Repeat steps 4-9 until the confidence level according to Annex G clause G.2.3 is achieved.

14.4.1.6.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 14.4.1.6.4.3-1: Common Exception messages for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition L3 FILTERING NEEDED, Table H.3.1-3 with Condition RLM Table H.3.1-8 with Condition CSI-RS RLM Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.1.6.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms1000		
n310	n1		
t311	ms1000		
n311	n1		
}			

14.4.1.6.5 Test Requirement

Table 14.4.1.6.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access.

Table 14.4.1.6.5-1: Cell-specific test parameters for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access

Parameter		**Unit**	**Test 1**				
			T1	**T2**	**T3**	**T4**	**T5**
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 2	dB	1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1, 2	dBm/15kHz	-98				
Propagation condition			NTN-TDLC5-200				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 14.4.1.6.4-1.

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

14.4.1.7 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Editor's Note: This test is complete, but the following aspect needs to be updated:

- Modified parameters for RLM testing with 4RX antenna connection are not specified in TS 38.133

14.4.1.7.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS based radio link monitoring requirements in clause 14.4.1.0.

14.4.1.7.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access, CSI-RS based RLM and long DRX.

14.4.1.7.3 Minimum conformance requirement

The minimum requirements are specified in clause 14.4.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.1.7.

14.4.1.7.4 Test description

In the test, UE is configured to perform RLM based on CSI-RS, with *detectionResource* included in *RadioLinkMonitoringRS* set to CSI-RS, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table 14.4.1.7.4.1-1. The test parameters are given in Tables 14.4.1.7.4.1-3, 14.4.1.7.5-1, and 14.4.1.7.5-2 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test.

The test consists of three successive time periods, with time duration of T1, T2 and T3, respectively. Figure 14.4.1.7.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

The UE shall be provided with valid information about the SAN serving each cell in the test before the test.

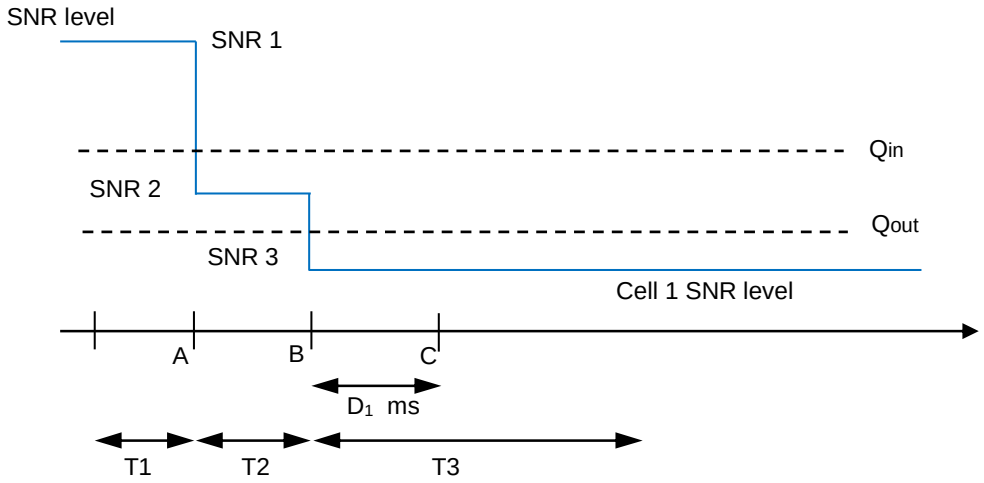

Figure 14.4.1.7.4-1: SNR variation for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

14.4.1.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.1.7.4.1-1.

Table 14.4.1.7.4.1-1: Supported test configurations for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Configuration	Description
14.4.1.7-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.4.1.7-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Configure the test equipment and the DUT according to the parameters in Table 14.4.1.7.4.1-2.

Table 14.4.1.7.4.1-2: Initial conditions for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.1.7.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.4.1.7.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.1.7.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.1.7.4.1-3: General test parameters for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.3 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
TRS configuration	Config 1, 2		TRS.1.1 FDD
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2

OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

14.4.1.7.4.2 Test Procedure

The test consists of a single satellite access NR cell (PCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to the PCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 14.4.1.7.4.1-3.

In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. The SS sends an *RRCReconfiguration* message to the UE to configure periodic CSI reporting and DRX according to section 14.4.1.7.4.3.

3. The UE sends an *RRCReconfigurationComplete* message.

4. Set the parameters of NR Cell according to T1 in Table 14.4.1.7.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.1.7.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.1.7.5-1. T3 starts.

7. If the SS:

a) detects uplink power equal to or higher than minimum output power in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point B; and

b) does not detect any uplink power higher than OFF power from time point C (D1 after the start of T3) until T3 expires, the number of successful tests is increased by one.

Otherwise, the number of failed tests is increased by one and proceed with step 10.

8. When T3 expires the SS shall change the SNR value to T1 as specified in Table 14.4.1.7.5-1.
9. If the UE has re-established the connection within 2 seconds, proceed with step 11. Otherwise, proceed with step 10.
10. The SS shall switch off and then on the UE and then proceed with step 1.
11. Repeat steps 1-9 until the confidence level according to Annex G clause G.2.3 is achieved.

14.4.1.7.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 14.4.1.7.4.3-1: Common Exception messages for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition L3 FILTERING NEEDED Table H.3.1-3 with Condition RLM Table H.3.1-8 with Condition CSI-RS RLM Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM Table H.3.7-1 with condition DRX.3 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.1.7.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
n310	n1		
t311	ms1000		
n311	n1		
}			

14.4.1.7.5 Test Requirement

Table 14.4.1.7.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access.

Table 14.4.1.7.5-1: Cell-specific test parameters for NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta	dB			
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta	dB			
EPRE ratio of PSS to SSSSSS_beta	dB			

EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 2	dB	1.8	-6.2	-15.8
N_{oc}	Config 1, 2	dBm/15kHz	-98		
Propagation condition			NTN-TDLC5-200		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 14.4.1.7.4-1.

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

- During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.
- The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

14.4.1.8 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Editor's Note: This test is complete, but the following aspect needs to be updated:

- Modified parameters for RLM testing with 4RX antenna connection are not specified in TS 38.133

14.4.1.8.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS based radio link monitoring requirements in clause 14.4.1.0.

14.4.1.8.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access, CSI-RS based RLM and long DRX.

14.4.1.8.3 Minimum conformance requirement

The minimum requirements are specified in clause 14.4.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.1.8.

14.4.1.8.4 Test description

In the test, UE is configured to perform RLM based on CSI-RS, with *detectionResource* included in *RadioLinkMonitoringRS* set to CSI-RS, and *purpose* set to '*rlf*'. Supported test configurations are shown in Table

14.4.1.8.4.1-1. The test parameters are given in Tables 14.4.1.8.4.1-3, 14.4.1.8.5-1 and 14.4.1.8.5-2 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5, respectively. Figure 14.4.1.8.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test.

The UE shall be provided with valid information about the SAN serving each cell in the test before the test.

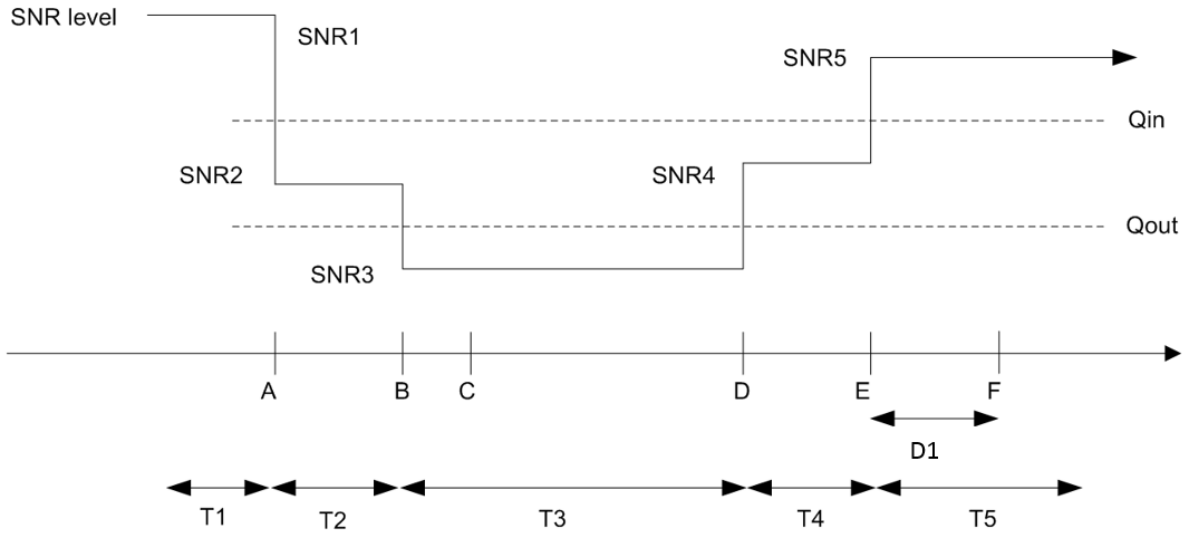

Figure 14.4.1.8.4-1: SNR variation for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

14.4.1.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.1.8.4.1-1.

Table 14.4.1.8.4.1-1: Supported test configurations for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Configuration	Description
14.4.1.8-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.4.1.8-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Configure the test equipment and the DUT according to the parameters in Table 14.4.1.8.4.1-2.

Table 14.4.1.8.4.1-2: Initial conditions for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.1.8.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	N/A	

1. Message contents are defined in clause 14.4.1.8.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.1.8.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.1.8.4.1-3: General test parameters for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
TRS configuration	Config 1, 2		TRS.1.1 FDD
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0

	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	0.2
T3		s	1.24
T4		s	0.2
T5		s	1.88
D1		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

14.4.1.8.4.2 Test Procedure

The test consists of a single satellite access NR cell (PCell). Prior to the start of the time duration T1, the UE shall be fully synchronized to the PCell. The UE shall be configured for periodic CSI reporting in PUCCH format 2 with a reporting periodicity as mentioned in the above table 14.4.1.8.4.1-3.

In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. The SS sends an *RRCReconfiguration* message to the UE to configure inter-frequency measurement with the corresponding gap pattern, periodic CSI reporting and DRX according to section 14.4.1.8.4.3.
3. The UE sends an *RRCReconfigurationComplete* message.
4. Set the parameters of NR Cell according to T1 in Table 14.4.1.8.5-1. Propagation conditions are set according to clause C.2.3. T1 starts.
5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.1.8.5-1. T2 starts.
6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.1.8.5-1. T3 starts.
7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 14.4.1.8.5-1. T4 starts.
8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 14.4.1.8.5-1. T5 starts.
9. If the SS detects uplink power equal to or higher than minimum output power in each subframe configured for CSI transmission (according to configured CSI periodicity on PUCCH format 2) during the period from time point A to time point F (D1 seconds after the start of time duration T5), the number of successful tests is increased by one. After the expiration of T5, the SS shall proceed with step 11 for the next iteration, or with step 10.

   Otherwise, the number of failed tests is increased by one and proceed with step 10.
10. The SS shall switch off and then on the UE and then proceed with step 1.
11. Repeat steps 4-9 until the confidence level according to Annex G clause G.2.3 is achieved.

14.4.1.8.4.3 Message Contents

Message contents are according to TS 38.508-1 [14] clauses 4.6.1 and 7.3 with the following exceptions:

Table 14.4.1.8.4.3-1: Common Exception messages for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-6 with conditions gapUE and RLM Table H.3.1-8 with Condition CSI-RS RLM Table H.3.5-4 Table H.3.5-9 with Condition CSI-RS RLM Table H.3.7-1 with condition DRX.3 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.1.8.4.3-2: *RLF-TimersAndConstants* for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms2000		
n310	n1		
t311	ms1000		
n311	n1		
}			

14.4.1.8.5 Test Requirement

Table 14.4.1.8.5-1 defines the cell specific primary level settings including test tolerances for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access.

Table 14.4.1.8.5-1: Cell-specific test parameters for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta	dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta	dB					
EPRE ratio of PSS to SSSSSS_beta	dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					

SNR on RLM-RS	Config 1, 2	dB	1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1, 2	dBm/15kHz	-98				
Propagation condition			NTN-TDLC5-200				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 14.4.1.8.4-1.							

Table 14.4.1.8.5-2: Measurement gap configuration for NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access

Field	Test 1
	Value
gapOffset	0
NOTE: Ensure that RLM RS is partially overlapped with measurement gap0	

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

14.4.2 Beam Failure Detection and Link recovery procedures for satellite access

14.4.2.00 General

The UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set $\overline{q}_0$ as specified in TS 38.213 [8] in order to detect beam failure on PCell and the UE is configured with only PCell, which is served by satellite access node (SAN).

The RS resource configurations in the set $\overline{q}_0$ on PCell can be periodic CSI-RS resources and/or SSBs.

On each RS resource configuration in the set $\overline{q}_0$, the UE shall estimate the radio link quality and compare it to the threshold Q_{out_LR} for the purpose of accessing downlink radio link quality of the serving cell beams.

The threshold Q_{out_LR} is defined as the level at which the downlink radio level link of a given resource configuration on set $\overline{q}_0$ cannot be reliably received and shall correspond to the $BLER_{out}$ = 10% block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{out_LR_SSB}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 14.4.2.0.1-1. For CSI-RS based beam failure detection, $Q_{out_LR_CSI\text{-}RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 14.4.2.0.3-1.

Upon request the UE shall deliver configuration indexes from the set $\overline{q}_1$ as specified in TS 38.213 [8] , to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold Q_{in_LR}, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained from an SSB. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained for a CSI-RS resource after scaling a respective CSI-RS reception power with a value provided

by higher layer parameter *powerControlOffsetSS*. The RS resource configurations in the set $\overline{q}_1$ can be periodic CSI-RS resources or SSBs or both SSB and CSI-RS resources.

The normative reference for this requirement is TS 38.133 [6] clause 8.5C.1.

14.4.2.0 Minimum conformance requirements

14.4.2.0.1 Minimum conformance requitements for SSB based beam failure detection

[TS 38.133, clause 8.5C.2.1]

The requirements in this clause apply for each SSB resource in the set $\overline{q}_0$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in this clause.

Table 14.4.2.0.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

[TS 38.133, clause 8.5C.2.2]

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_SSB}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB}$ ms period.

The value of $T_{Evaluate_BFD_SSB}$ is defined in Table 14.4.2.0.1-2 for FR1.

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
- $N_{total} / N_{available}$ with $N_{available} > 0$

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is

- the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
- same as $N_{outside_MG}$, otherwise

- T_{L1} is periodicity of the target RLM-RS
- $P_{sharing\ factor} = 3$.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Table 14.4.2.0.1-2: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	Max(50, Ceil(5 × P) × T_{SSB})
DRX cycle ≤ 320ms	Max(50, Ceil(7.5 × P) × Max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	Ceil(5 × P) × T_{DRX}
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

The normative reference for this requirement is TS 38.133 [6] clause 8.5C.2.

14.4.2.0.2 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

The normative reference for this requirement is TS 38.133 [6] clause 8.5C.2.3.

14.4.2.0.3 Minimum conformance requitements for CSI-RS based beam failure detection

[TS 38.133, clause 8.5C.3.1]

The requirements in this clause apply for each CSI-RS resource in the set $\overline{q}_0$ of resource configurations for a serving cell, provided that the CSI-RS resource(s) in set $\overline{q}_0$ for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in this clause. UE is not expected to perform beam failure detection measurements on the CSI-RS configured for BFD if the CSI-RS is not QCL-ed, with QCL-TypeD when applicable, with the RS in the active TCI state of any CORESET configured in the UE active BWP.

Table 14.4.2.0.3-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER

DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

[TS 38.133, clause 8.5C.3.2]

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_CSI-RS}$ ms period becomes worse than the threshold $Q_{out_LR_CSI-RS}$ within $T_{Evaluate_BFD_CSI-RS}$ ms period.

The value of $T_{Evaluate_BFD_CSI-RS}$ is defined in Table 14.4.2.0.3-1 for FR1.

The requirements of $T_{Evaluate_BFD_CSI-RS}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
- $N_{total} / N_{available}$ with $N_{available} > 0$

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is
  - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
  - same as $N_{outside_MG}$, otherwise
- T_{L1} is periodicity of the target RLM-RS
- $P_{sharing\ factor} = 3$.

Note: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

The values of M_{BFD} used in Table 14.4.2.0.3-2 are defined as

- M_{BFD} = 10, if the CSI-RS resource(s) in set $\overline{q}_0$ used for BFD is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{BFD} used in Table 14.4.2.0.3-2 are defined as

For each CSI-RS resource in the set $\overline{q}_0$ configured for PCell SA

- P_{BFD} = 1.

Table 14.4.2.0.3-2: Evaluation period $T_{Evaluate_BFD_CSI-RS}$ for FR1

Configuration	$T_{Evaluate_BFD_CSI-RS}$ (ms)
no DRX	$Max(50, Ceil(M_{BFD} \times P \times P_{BFD}) \times T_{CSI-RS})$
DRX cycle ≤ 320ms	$Max(50, Ceil(1.5 \times M_{BFD} \times P \times P_{BFD}) \times Max(T_{DRX}, T_{CSI-RS}))$
DRX cycle > 320ms	$Ceil(M_{BFD} \times P \times P_{BFD}) \times T_{DRX}$
Note: T_{CSI-RS} is the periodicity of CSI-RS resource in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.	

The normative reference for this requirement is TS 38.133 [6] clause 8.5C.3.2.

14.4.2.0.4 Measurement restriction for CSI-RS based beam failure detection

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following scenarios.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clause 8.5C.3.3.

14.4.2.0.5 Minimum requirement for L1 indication

When the radio link quality on all the RS resources in set $\overline{q}_0$ is worse than Q_{out_LR}, layer 1 of the UE shall send a beam failure instance indication to the higher layers

The beam failure instance evaluation for the RS resources in set $\overline{q}_0$ shall be performed as specified in clause 6 in TS 38.213 [8]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval_BFD}$.

When DRX is not used, $T_{Indication_interval_BFD}$ is max(2ms, $T_{SSB\text{-}RS,M}$)) or max(2ms, $T_{CSI\text{-}RS,M}$), where $T_{SSB\text{-}RS,M}$ and $T_{CSI\text{-}RS,M}$ is the shortest periodicity of all RS resources in set $\overline{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\overline{q}_0$ or CSI-RS resource in the set $\overline{q}_0$.

When DRX is used, for SSB based link quality measurement,

- $T_{Indication_interval_BFD}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{SSB\text{-}RS,M}$), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{Indication_interval_BFD}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{CSI\text{-}RS,M}$), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

The normative reference for this requirement is TS 38.133 [6] clause 8.5C.4.

14.4.2.0.6 Minimum conformance requitements for SSB based candidate beam detection

[TS 38.133, clause 8.5C.5.1]

The requirements in this clause apply for each SSB resource in the set $\overline{q}_1$ configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in this clause.

[TS 38.133, clause 8.5C.5.2]

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in set $\overline{q}_1$ estimated over the last $T_{Evaluate_CBD_SSB}$ ms period becomes better than the threshold Q_{in_LR} provided SSB_RP and SSB Ês/Iot are according to Annex Table B.2.19.1 of TS 38.133 [6] for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 14.4.2.0.6-1 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_SSB}$ is defined in Table 14.4.2.0.6-1 for FR1.

where,

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ with $N_{available}$ = 0
- N_{total} / $N_{available}$ with $N_{available}$ > 0

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is
  - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
  - same as $N_{outside_MG}$, otherwise
- T_{L1} is periodicity of the target RLM-RS

- $P_{sharing\ factor} = 3$.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

The values of P_{CBD} used in Table 14.4.2.0.6-1 are defined as

For each SSB resource in the set $\bar{q}_1$ configured for PCell.

- $P_{CBD} = 1$.

Table 14.4.2.0.6-1: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR1

Configuration	$T_{Evaluate_CBD_SSB}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$Max(25, Ceil(3 \times P \times P_{CBD}) \times T_{SSB})$
DRX cycle > 320ms	$Ceil(3 \times P \times P_{CBD}) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

The normative reference for this requirement is TS 38.133 [6] clause 8.5C.5.2.

14.4.2.0.7 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB for CBD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions;
- If SSB and CSI-RS have different SCS-es,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

The normative reference for this requirement is TS 38.133 [6] clause 8.5C.5.3.

14.4.2.0.8 Minimum conformance requitements for CSI-RS based candidate beam detection

[TS 38.133, clause 8.5C.6.1]

The requirements in this clause apply for each CSI-RS resource in the set $\bar{q}_1$ configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in this clause.

[TS 38.133, clause 8.5C.6.2]

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in set $\bar{q}_1$ estimated over the last $T_{Evaluate_CBD_CSI\text{-}RS}$ [ms] period becomes better than the threshold Q_{in_LR} within $T_{Evaluate_CBD_CSI\text{-}RS}$ [ms] period provided CSI-RS $\hat{E}s/Iot$ is according to Annex Table B.2.19.2 of TS 38.133 [6] for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in table 14.4.2.0.8-1 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_CSI\text{-}RS}$ is defined in Table 14.4.2.0.8-1 for FR1.

P value for an RLM-RS resource to be measured is defined as

- $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
- $N_{total} / N_{available}$ with $N_{available} > 0$

For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{available}$ is
  - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
  - same as $N_{outside_MG}$, otherwise
- T_{L1} is periodicity of the target RLM-RS
- $P_{sharing\ factor} = 3$.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

The values of M_{CBD} used in Table 14.4.2.0.8-1 are defined as

- $M_{CBD} = 3$, if the CSI-RS resource configured in the set $\bar{q}_1$ is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{CBD} used in Table 8.5C.6.2-1 are defined as

For each CSI-RS resource in the set $\bar{q}_1$ configured for SA

- $P_{CBD} = 1$.

Table 14.4.2.0.8-1: Evaluation period $T_{Evaluate_CBD_CSI-RS}$ for FR1

Configuration	$T_{EvaluateC_CBD_CSI-RS}$ (ms)
non-DRX, DRX cycle ≤ 320ms	$Max(25, Ceil(M_{CBD} \times P \times P_{CBD}) \times T_{CSI-RS})$
DRX cycle > 320ms	$Ceil(M_{CBD} \times P \times P_{CBD}) \times T_{DRX}$
Note: T_{CSI-RS} is the periodicity of CSI-RS resource in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

The normative reference for this requirement is TS 38.133 [6] clause 8.5C.6.2.

14.4.2.0.9 Measurement restriction for CSI-RS based candidate beam detection

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for CBD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS based CBD measurement for without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer measurement period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for CBD measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clause 8.5C.6.3.

14.4.2.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in non-DRX mode for Satellite Access

Editor's note: This test tolerance analysis is incomplete. The following aspects are missing:

- The accuracy requirement for L1-RSRP are in [ ] in TS 38.133 and not yet finalised

- The results of the TT analysis are provisional until the corresponding uncertainty requirement values are agreed

14.4.2.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct SSB-based link recovery based on beam candidate set q1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 14.4.2.0.

14.4.2.1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.4.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.2.1.

14.4.2.1.4 Test description

The test parameters are given in Tables 14.4.2.1.4.1-1, 14.4.2.1.4.1-3 and 14.4.2.1.5-1 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 14.4.2.1.4-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure 14.4.2.1.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

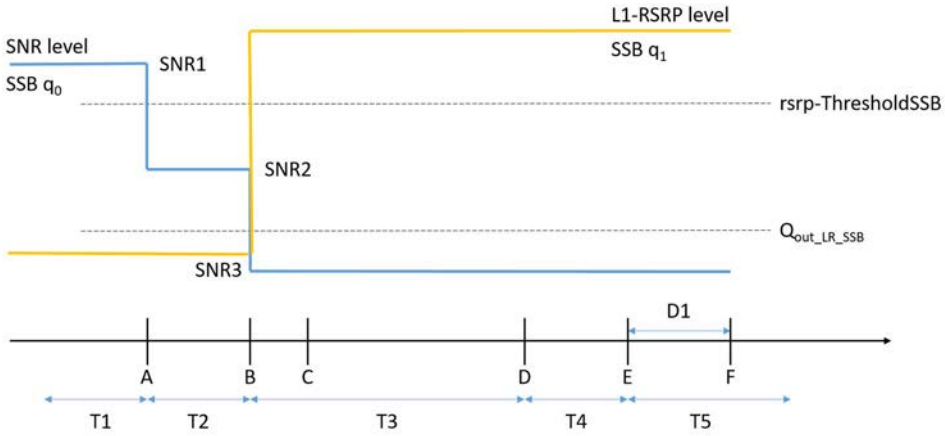

Figure 14.4.2.1.4-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

14.4.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.2.1.4.1-1.

Table 14.4.2.1.4.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.4.2.1.4.1-2.

Table 14.4.2.1.4.1-2: Initial conditions for NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in non-DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.2.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.4.2.1.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.2.1.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.2.1.4.1-3: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Value	Comment
		Test 1	

NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
BWchannel	Config 1,2	MHz	10: NRB,c = 52	
DL initial BWP configuration	Config 1,2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1	
UL initial BWP configuration	Config 1,2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1	
TDD Configuration	Config 1,2		Not Applicable	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	
SSB Configuration	Config 1,2		SSB.3 FR1	
SMTC Configuration	Config 1,2		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		PRACH.2 FR1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table

				8.1.1-1 of TS 38.133 [6]).
rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	
CSI-RS for tracking	Config 1,2		TRS.1.1 FDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

14.4.2.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS sends an *RRCReconfiguration* message to the UE to configure inter-frequency measurement.

3. The UE sends an *RRCReconfigurationComplete* message.

4. Set the parameters of NR Cell 1 according to T1 in Table 14.4.2.1.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.2.1.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.2.1.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 14.4.2.1.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 14.4.2.1.5-1. T5 starts.

9. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

and

b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B

and

c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

the number of successful tests is increased by one.

Otherwise the number of failed tests is increased by one.

10. Switch the UE off and on. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 4-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.4.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 4.6 and 7.3.1 with condition "Short_DCI" with the following exceptions:

Table 14.4.2.1.4.3-1: Common Exception messages for NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-6 with Condition BFD Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ, L3 FILTERING NEEDED, GAP_NEEDED Table H.3.1-3 with Condition INTER-FREQ MO (where ssbFrequency is set to the ARFCN value of carrier centre of High range) Table H.3.1-4 with A3-offset = 0 Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.5-4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.2.1.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbol 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			

ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 14.4.2.1.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 14.4.2.1.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 14.4.2.1.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

Table 14.4.2.1.4.3-6: PDCCH *Search Space* for USS

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	2		
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n1		

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
aggregationLevel4	n1		
aggregationLevel8	n0		
}			
}			

14.4.2.1.5 Test requirements

Tables 14.4.2.1.4.1-3 and 14.4.2.1.5-1 define the primary level settings including test tolerances for NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX.

Table 14.4.2.1.5-1: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1,2	dB	5.4	-2.6	-12.4	-12.4	-12.4
SNR_SSB of set q_1	Config 1,2	dB	-10.1	-10.1	10.1	10.1	10.1
SSB_RP of set q_1	Config 1,2	dBm/SCS kHz	-108.1	-108.1	-87.9	-87.9	-87.9
N_{oc}	Config 1,2	dBm/15 KHz	-98				
Propagation condition			AWGN				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 14.4.2.1.4-1.
Note 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 is -15dB-TT = -15.4dB (including test tolerances).

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 130 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

14.4.2.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in DRX mode for Satellite Access

Editor's note: This test tolerance analysis is incomplete. The following aspects are missing:

- The accuracy requirement for L1-RSRP are in [ ] in TS 38.133 and not yet finalised

- The results of the TT analysis are provisional until the corresponding uncertainty requirement values are agreed

14.4.2.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct SSB-based link recovery based on beam candidate set q1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 14.4.2.0.

14.4.2.2.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.4.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.2.2.

14.4.2.2.4 Test description

The test parameters are given in Tables 14.4.2.2.4.1-1, 14.4.2.2.4.1-3 and 14.4.2.2.5-1 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 14.4.2.2.4-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure 14.4.2.2.4-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery.

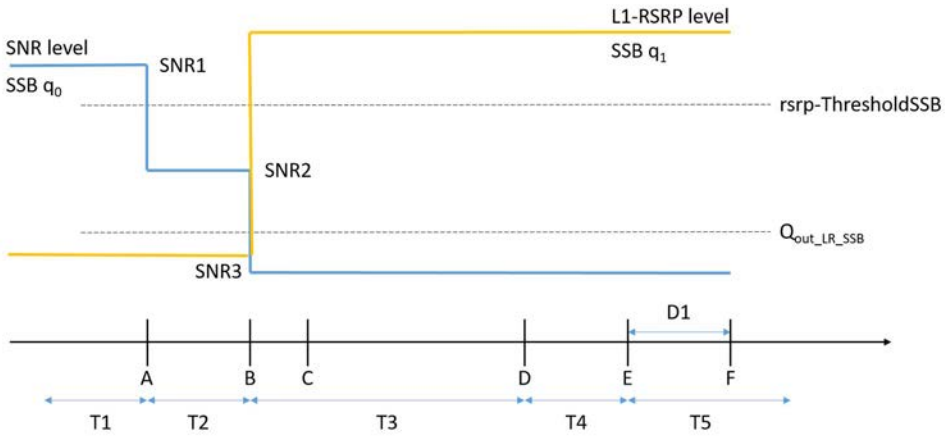

Figure 14.4.2.2.4-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in DRX mode

14.4.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.2.2.4.1-1.

Table 14.4.2.2.4.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.4.2.2.4.1-2.

Table 14.4.2.2.4.1-2: Initial conditions for NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.2.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.4.2.2.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.2.2.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.2.2.4.1-3: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
BWchannel	Config 1,2	MHz	10: NRB,c = 52	
DL initial BWP configuration	Config 1,2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1	
UL initial BWP configuration	Config 1,2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1	
TDD Configuration	Config 1,2		Not Applicable	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	
SSB Configuration	Config 1,2		SSB.3 FR1	
SMTC Configuration	Config 1,2		SMTC.1	

PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		PRACH.2 FR1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	Table A.5-1
Gap pattern ID			N.A.	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1 of TS 38.133 [6]).
rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	
CSI-RS for tracking	Config 1,2		TRS.1.1 FDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	

N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	3.24	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

14.4.2.1.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS sends an *RRCReconfiguration* message to the UE to configure inter-frequency measurement.

3. The UE sends an *RRCReconfigurationComplete* message.

4. Set the parameters of NR Cell 1 according to T1 in Table 14.4.2.2.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.2.2.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.2.2.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 14.4.2.2.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 14.4.2.2.5-1. T5 starts.

9. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B

   and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

10. Switch the UE off and on. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 4-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.4.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 4.6 and 7.3.1 with condition "Short_DCI" with the following exceptions:

Table 14.4.2.2.4.3-1: Common Exception messages for NR SA FR1 SSB-based beam failure detection and link recovery in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition SSB BFD Table H.3.1-10 with Condition SSB Table H.3.1-10A Table H.3.5-4 Table H.3.7-1 with Condition DRX.7 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.2.2.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbol 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 14.4.2.2.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 14.4.2.2.4.3-4: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		

searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 14.4.2.2.4.3-5: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

Table 14.4.2.2.4.3-6: PDCCH *Search Space* for USS

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	2		
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n1		
aggregationLevel4	n1		
aggregationLevel8	n0		
}			
}			

14.4.2.2.5 Test requirements

Tables 14.4.2.2.4.1-3 and 14.4.2.2.5-1 define the primary level settings including test tolerances for NR SA FR1 SSB-based beam failure detection and link recovery in DRX.

Table 14.4.2.2.5-1: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1,2	dB	5.4	-2.6	-12.4	-12.4	-12.4

SNR_SSB of set q_1	Config 1,2	dB	-10.1	-10.1	10.1	10.1	10.1
SSB_RP of set q_1	Config 1,2	dBm/SCS kHz	-108.1	-108.1	-87.9	-87.9	-87.9
N_{oc}	Config 1,2	dBm/15 KHz	-98				
Propagation condition			AWGN				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Void. Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 14.4.2.2.4-1. Note 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 is -15dB-TT = -15.4dB (including test tolerances).							

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1930 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

14.4.2.3 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with CSI-RS-based BFD and LR in non-DRX mode for Satellite Access

Editor's note: This test tolerance analysis is incomplete. The following aspects are missing:

- The accuracy requirement for L1-RSRP are in [ ] in TS 38.133 and not yet finalised

- The results of the TT analysis are provisional until the corresponding uncertainty requirement values are agreed

14.4.2.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 14.4.2.0.

14.4.2.3.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.4.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.2.3.

14.4.2.3.4 Test description

The test parameters are given in Tables 14.4.2.3.4.1-1, 14.4.2.3.4.1-3 and 14.4.2.3.5-1 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 14.4.2.3.4-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure 14.4.2.3.4-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

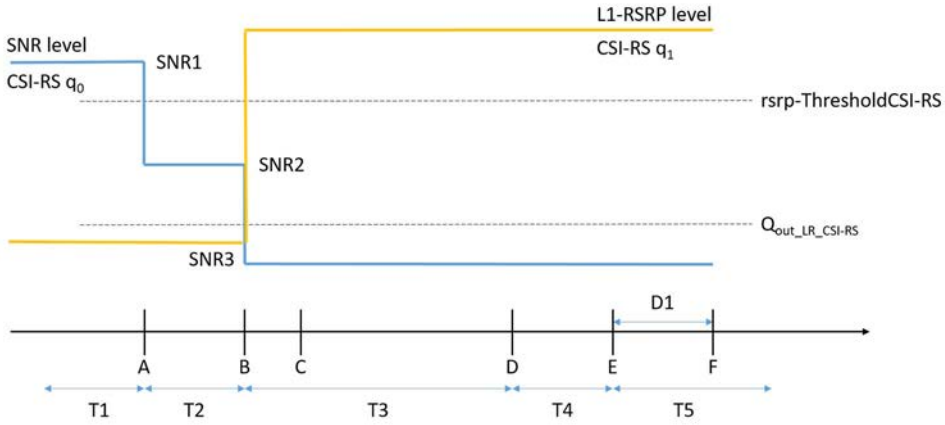

Figure 14.4.2.3.4-1: SNR and L1-RSRP variation CSI-RS for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

14.4.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.2.3.4.1-1.

Table 14.4.2.3.4.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.4.2.3.4.1-2.

Table 14.4.2.3.4.1-2: Initial conditions for NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with CSI-RS-based BFD and LR in non-DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.2.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.4.2.3.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.2.3.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.2.3.4.1-3: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
TDD Configuration	Config 1,2		Not Applicable	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	
SSB Configuration	Config 1,2		SSB.3 FR1	
SMTC Configuration	Config 1,2		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		PRACH.4 FR1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	

DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1 of TS 38.133 [6]).
rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for q_0 and q_1	Config 1,2		CSI-RS.1.2 FDD	
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	
TRS configuration	Config 1,2		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1,2		CSI-RS.1.2 FDD	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.08	
D1		s	0.04	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

14.4.2.3.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS sends an *RRCReconfiguration* message to the UE to configure inter-frequency measurement.

3. The UE sends an *RRCReconfigurationComplete* message.

4. Set the parameters of NR Cell 1 according to T1 in Table 14.4.2.3.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.2.3.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.2.3.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 14.4.2.3.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 14.4.2.3.5-1. T5 starts.

9. If the SS:

a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

and

b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B

and

c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

the number of successful tests is increased by one.

Otherwise the number of failed tests is increased by one.

10. Switch the UE off and on. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 4-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.4.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 4.6 and 7.3.1 with condition “Short_DCI” with the following exceptions:

Table 14.4.2.3.4.3-1: Common Exception messages for NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-10 with Condition CSI-RS Table H.3.1-10A Table H.3.5-4 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.2.3.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbol 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS

dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 14.4.2.3.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 14.4.2.3.4.3-4: *NZP-CSI-RS-Resource*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-85			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
powerControlOffsetSS	db0		
}			

Table 14.4.2.3.4.3-5: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		
tpc-SRS	Not present		
}			

Table 14.4.2.3.4.3-6: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

14.4.2.3.5 Test requirements

Tables 14.4.2.3.4.1-3 and 14.4.2.3.5-1 define the primary level settings including test tolerances for NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX.

Table 14.4.2.3.5-1: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1,2	dB	5.4	-2.6	-12.4	-12.4	-12.4
SNR_CSI-RS of set q_1	Config 1,2	dB	-10.1	-10.1	10.1	10.1	10.1
CSI-RS_RP of set q_1	Config 1,2	dBm/SCS kHz	-108.1	-108.1	-87.9	-87.9	-87.9
N_{oc}	Config 1,2	dBm/15 KHz	-98				
Propagation condition			AWGN				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 14.4.2.3.4-1.
Note 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 is -15dB-TT = -15.4dB (including test tolerances).

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 40 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

14.4.2.4 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with CSI-RS-based BFD and LR in DRX mode for Satellite Access

Editor's note: This test tolerance analysis is incomplete. The following aspects are missing:

- The accuracy requirement for L1-RSRP are in [ ] in TS 38.133 and not yet finalised

- The results of the TT analysis are provisional until the corresponding uncertainty requirement values are agreed

14.4.2.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 14.4.2.0.

14.4.2.4.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.4.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.4.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.2.4.

14.4.2.4.4 Test description

The test parameters are given in Tables 14.4.2.4.4.1-1, 14.4.2.4.4.1-3 and 14.4.2.4.5-1 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 14.4.2.4.4-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure 14.4.2.4.4-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery.

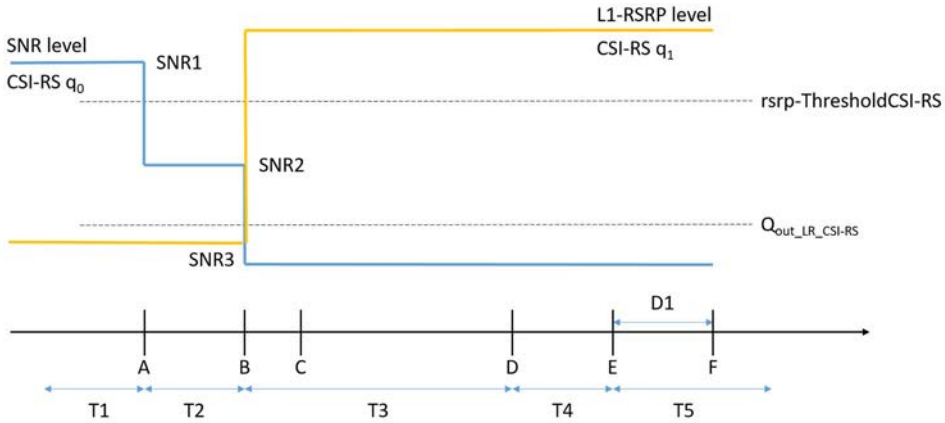

Figure 14.4.2.4.4-1: SNR and L1-RSRP variation CSI-RS for CSI-RS-based beam failure detection and link recovery testing in DRX mode

14.4.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.2.4.4.1-1.

Table 14.4.2.4.4.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz

Note: The UE is only required to be tested in one of the supported test configurations

Configure the test equipment and the DUT according to the parameters in Table 14.4.2.4.4.1-2.

Table 14.4.2.4.4.1-2: Initial conditions for NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with CSI-RS-based BFD and LR in DRX mode for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.2.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.4.2.4.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.4.2.4.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.4.2.4.4.1-3: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
TDD Configuration	Config 1,2		Not Applicable	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	
SSB Configuration	Config 1,2		SSB.3 FR1	
SMTC Configuration	Config 1,2		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		PRACH.4 FR1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetica	dB	0	

	l PDCCH RE energy to average SSS RE energy			
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1 of TS 38.133 [6]).
rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for q_0 and q_1	Config 1,2		CSI-RS.1.2 FDD	
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	
TRS configuration	Config 1,2		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1,2		CSI-RS.1.2 FDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

14.4.2.4.4.2 Test procedure

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. The SS sends an *RRCReconfiguration* message to the UE to configure inter-frequency measurement.

3. The UE sends an *RRCReconfigurationComplete* message.

4. Set the parameters of NR Cell 1 according to T1 in Table 14.4.2.4.5-1. Propagation conditions are set according to Annex C.2.3. T1 starts.

5. When T1 expires the SS shall change the SNR value to T2 as specified in Table 14.4.2.4.5-1. T2 starts.

6. When T2 expires the SS shall change the SNR value to T3 as specified in Table 14.4.2.4.5-1. T3 starts.

7. When T3 expires the SS shall change the SNR value to T4 as specified in Table 14.4.2.4.5-1. T4 starts.

8. When T4 expires the SS shall change the SNR value to T5 as specified in Table 14.4.2.4.5-1. T5 starts.

9. If the SS:

   a) detects uplink power on NR carrier equal to or higher than minimum output power defined in TS 38.521-1 [17] clause 6.3.1.5 in each slot configured for CSI transmission (according CSI reporting on PUCCH) during the period from time point A to time point B

   and

   b) does not detect preamble on a beam associated with the candidate beam set $q_1$before time point B

   and

   c) detects preamble on a beam associated with the candidate beam set q_1 before time point F (D1 after the start of T5),

   the number of successful tests is increased by one.

   Otherwise the number of failed tests is increased by one.

10. Switch the UE off and on. Ensure the UE is in RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat steps 4-10 for all subtests until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.4.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 and clause 4.6 and 7.3.1 with condition "Short_DCI" with the following exceptions:

Table 14.4.2.4.4.3-1: Common Exception messages for NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX mode

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-8 with Condition CSI-RS BFD Table H.3.1-10 with Condition CSI-RS Table H.3.1-10A Table H.3.5-4 Table H.3.7-1 with Condition DRX.7 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.4.2.4.4.3-2: PDCCH *Search Space* for BFR

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
searchSpaceId	4	BFR	
controlResourceSetId	2	BFR	
monitoringSlotPeriodicityAndOffset CHOICE {			
sl1	NULL		
}			
monitoringSymbolsWithinSlot	10000000000000	Symbol 0	
nrofCandidates SEQUENCE {			
aggregationLevel1	n0		
aggregationLevel2	n0		
aggregationLevel4	n0		
aggregationLevel8	n1	AL8	
aggregationLevel16	n0		
}			
searchSpaceType CHOICE {			
ue-Specific SEQUENCE {			USS
dci-Formats	formats0-0-And-1-0	DCI Format 1_0	
}			
}			
}			

Table 14.4.2.4.4.3-3: *RLF-TimersAndConstants*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
n310	n2		
}			

Table 14.4.2.4.4.3-4: *NZP-CSI-RS-Resource*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-85			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
powerControlOffsetSS	db0		
}			

Table 14.4.2.4.4.3-5: *PDCCH-Config*

Derivation Path: TS 38.501-1 [14],Table 4.6.3-95			
Information Element	**Value/remark**	**Comment**	**Condition**
PDCCH-Config ::= SEQUENCE {			
controlResourceSetToAddModList SEQUENCE(SIZE (1..3)) OF ControlResourceSet {	2 entries		
ControlResourceSet[2]	ControlResourceSet	entry 2, BFR	
}			
controlResourceSetToReleaseList	Not present		
searchSpacesToAddModList SEQUENCE(SIZE (1..10)) OF SearchSpace {	2 entries		
SearchSpace[2]	SearchSpace	entry 2, BFR	
}			
searchSpacesToReleaseList	Not present		
downlinkPreemption	Not present		
tpc-PUSCH	Not present		
tpc-PUCCH	Not present		

tpc-SRS	Not present		
}			

Table 14.4.2.4.4.3-6: ControlResourceSet for BFR

Derivation Path: TS 38.501-1 [14],Table 7.3.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
controlResourceSetId	2		
duration	2		
cce-REG-MappingType CHOICE {			
interleaved ::= SEQUENCE {			
reg-BundleSize	n6		
interleaverSize	n2		
shiftIndex	0		
}			
tci-StatesPDCCH-ToAddList	Not present		
}			

14.4.2.4.5 Test requirements

Tables 14.4.2.4.4.1-3 and 14.4.2.4.5-1 define the primary level settings including test tolerances for NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX.

Table 14.4.2.4.5-1: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		**Unit**	**Test 1**				
			T1	**T2**	**T3**	**T4**	**T5**
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1,2	dB	5.4	-2.6	-12.4	-12.4	-12.4
SNR_CSI-RS of set q_1	Config 1,2	dB	-10.1	-10.1	10.1	10.1	10.1
CSI-RS_RP of set q_1	Config 1,2	dBm/SCS kHz	-108.1	-108.1	-87.9	-87.9	-87.9
N_{oc}	Config 1,2	dBm/15 KHz	-98				
Propagation condition			AWGN				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Void.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 14.4.2.3.4-1.
Note 9: The SNR values are specified for a UE with 2RX antennas connected under test. For a UE with 4RX antennas connected under test, the SNR for RS in set q0 during T3, T4, and T5 is -15dB-TT = -15.4dB (including test tolerances).

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1.

No later than time point F occurring no later than D1 = 1930 ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1. The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

14.4.3 Active BWP Switch for SAN

14.4.3.1 DCI-based and Timer-based Active BWP Switch

14.4.3.1.0 Minimum conformance requirements

14.4.3.1.0.1 Minimum conformance requirements for DCI-based and timer-based active BWP switch

The requirements in this clause apply for a UE configured with only PCell, which is served by satellite access node (SAN). The requirements in this clause also apply for a UE configured with more than one BWP on PCell.

UE shall complete the switch of active DL and/or UL BWP within the delay defined in this clause.

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with more than one BWP configurations configured.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ + Y which starts from the beginning of DL slot n. Where,

- Y=0, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.
- Y equals to the length of 1 slot, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. In this scenario, $T_{BWPswitchDelay}$ + Y shall follow the smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (FR1) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [13] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* [13] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 14.4.3.1.0.1-1.

Table 14.4.3.1.0.1-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5
2	0.25	3	9
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in TS 38.133 [6] clause 8.10C in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in TS 38.133 [6] clause 8.10C in the new BWP.

If the BWP switch is triggered within or outside DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321, 12], UE shall be able to complete active BWP switching within the time duration of

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, or
- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where
- $T_{BWPswitchDelay}$ is defined in Table 14.4.3.1.0.1-1 corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.
- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.
- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where UE receives dormancy indication.

For DCI-based BWP switch, if the new BWP is a dormant BWP, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive CSI-RS (for DL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL slot occurs right after a time duration of $T_{dormantBWPswitchDelay}$ which starts from the beginning of DL slot n.

The normative reference for this requirement is TS 38.133 [6] clauses 8.6C.2.

14.4.3.1.1 NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Editor's Note: This test is incomplete in the following aspects:

- MU and TT analysis is incomplete
- Message contents may need to be updated

- Several test parameters and configuration are still FFS

14.4.3.1.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 14.4.3.1.0.1.

14.4.3.1.1.2 Test applicability

This test applies to all types of NR UE release 17 onwards supporting BWP adaptation of at least 2 BWPs, DCI and timer-based active BWP switching delay Type1 or Type2 and satellite access.

14.4.3.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.4.3.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.3.1.1.

14.4.3.1.1.4 Test description

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

> Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot ($i+T_{BWPswitchDelay}$) as defined in clause 14.4.3.1.0 and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + k1 + 2^{\mu-\mu_{K_{offset}}} K_{offset}$). The UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i+T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

> The time period T3 starts from the slot #*j*, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.
>
> The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot ($j+T_{BWPswitchDelay}$) as defined in clause 14.4.3.1.0 and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay} + k1 + 2^{\mu-\mu_{K_{offset}}} K_{offset}$). The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j+T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

14.4.3.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.3.1.1.4.1-1.

Table 14.4.3.1.1.4.1-1: Supported test configurations for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Configuration	Description
14.4.3.1.1-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.4.3.1.1-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.4.3.1.1.4.1-2.

Table 14.4.3.1.1.4.1-2: Initial conditions for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.3.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.4.3.1.1.4.1-3.

2. Message contents are defined in clause 14.4.3.1.1.4.3.

3. The test scenario comprises of one satellite access NR PCell (Cell 1). Cell 1 is configured according to Annex C.1.2 and C.1.3.

4. The initial test environment conditions are setup according to section 14.0.5.

5. By step 4 of the test procedure:

   - UE is connected to Cell 1 on radio channel 1.

   - UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.

   - UE is configured with a *bwp-InactivityTimer* timer value for Cell 1.

Table 14.4.3.1.1.4.1-3: General test parameters for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell 1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	200	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

14.4.3.1.1.4.2 Test procedure

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

The Cell 1 has constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Tables 14.4.3.1.1.4.1-3 and 14.4.3.1.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall transmit an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures 2 different UE-specific bandwidth parts, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to Table 14.4.3.1.1.4.3-2. UE is configured with a bwp-InactivityTimer timer value for PCell.

4. The SS shall send a DCI format 1_1 command for Cell 1 DL BWP switch.

5. The UE shall receive the DCI format 1_1 command in slot # denoted i, then T1 starts and the UE switch its bandwidth part from BWP-1 to BWP-2:

   If the UE starts to report valid ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot ($i + T_{BWPswitchDelay} + k1 + 2^{\mu - \mu_{K_{offset}}} K_{offset}$), the number of successful subtests is increased by one. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

6. If the UE sends valid ACK/NACK for the Cell 1 on BWP-2, T2 starts. During T2, the SS shall not transmit DCI format for PDSCH reception on Cell 1.

7. T3 starts from the first slot #j of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires and the SS restarts to send DCI format for PDSCH reception on PCell. Then, the UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part, BWP-1:

   If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j + T_{BWPswitchDelay} + k1 + 2^{\mu - \mu_{K_{offset}}} K_{offset}$), the number of successful tests is increased by one, otherwise, the number of failure tests is increased by one. The SS shall switch off and then on the UE.

8. Repeat steps 1-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

The SS verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

If all subtests pass, the test passes. If one subtest fails, the test fails.

14.4.3.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.4.3.1.1.4.3-1: Common Exception messages for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	

Table 14.4.3.1.1.4.3-1A: *RRCReconfiguration* (Step 3) for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.8.1-1B			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 14.4.3.1.1.4.3-1B	
}			
}			
}			
}			

Table 14.4.3.1.1.4.3-1B: *CellGroupConfig* (Table 14.4.3.1.1.4.3-1A) for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.8.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 14.4.3.1.1.4.3-2	
}			
}			

Table 14.4.3.1.1.4.3-2: *ServingCellConfig* (Table 14.4.3.1.1.4.3-1B) for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 14.4.3.1.1.4.3-3	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 14.4.3.1.1.4.3-3	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 14.4.3.1.1.4.3-4	
BWP-Uplink[2]	BWP-Uplink with condition BWP2	entry 2 Table 14.4.3.1.1.4.3-4	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			

}			
}			

Table 14.4.3.1.1.4.3-3: *BWP-Downlink* (Table 14.4.3.1.1.4.3-2) for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 14.4.3.1.1.4.3-6	
}			
}			
}			

Table 14.4.3.1.1.4.3-4: *BWP-Uplink* (Table 14.4.3.1.1.4.3-2) for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3	BWP-2	BWP2
}			
}			

Table 14.4.3.1.1.4.3-5: *PDSCH-TimeDomainResourceAllocationList* (Table 14.4.3.1.1.4.3-6) for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		
mappingType	typeA		

startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	$T_{BWPswitchDelay}$	Defined in Table 14.4.3.1.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

Table 14.4.3.1.1.4.3-6: *PDSCH-ConfigCommon* (Table 14.4.3.1.1.4.3-3) for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 14.4.3.1.1.4.3-5	
}			

14.4.3.1.1.5 Test requirements

Tables 14.4.3.1.1.4.1-3 and 14.4.3.1.1.5-1 define the primary level settings including test tolerances for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access.

Table 14.4.3.1.1.5-1: NR Cell specific test parameters for NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1, 2		FDD
$BW_{channel}$	Config 1, 2		10 MHz: $N_{PRB,c}$ = 52
Serving Satellite Configuration	Config 1, 2		*[SSC.1] or [SSC.2]* *[NOTE: SSC.1 and SSC.2 are Serving Satellite Configurations for GSO and NGSO, respectively. The selection between the two is up to UE capability, and SSC.2 is selected if DUT supports both]*
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1, 2		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration	Config 1, 2		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration	Config 1, 2		DLBWP.1.3 Note 4
Initial UL BWP Configuration	Config 1, 2		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration	Config 1, 2		ULBWP.1.1 Note 4
Active UL BWP-2 Configuration	Config 1, 2		N/A
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 FDD

Parameter		Unit	Cell 1
RMSI CORESET parameters	Config 1, 2		CR.1.1 FDD
Dedicated CORESET parameters	Config 1, 2		CCR.1.2 FDD
OCNG Patterns			OP.1
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1, 2		TRS.1.1 FDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1, 2	dBm/SCS	-104+TT
N_{oc} Note 2		dBm/15 kHz	-104+TT
SS-RSRP Note 3	Config 1, 2	dBm/SCS	-87+TT
$\hat{E}_s/I_{ot}$		dB	17+TT
$\hat{E}_s/N_{oc}$		dB	17+TT
Io Note3	Config 1, 2	dBm/ 9.36 MHz	-58.96+TT
Propagation Condition			AWGN

NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i + T_{BWPswitchDelay} + k1 + 2^{\mu-\mu_{K_{offset}}} K_{offset}$).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($j + T_{BWPswitchDelay} + k1 + 2^{\mu-\mu_{K_{offset}}} K_{offset}$.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in TS 38.321 [12].

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 14.4.3.1.0.1-1.

All of the above test requirements shall be fulfilled in order for the observed Cell 1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

14.4.3.2 RRC-based Active BWP Switch

14.4.3.2.0 Minimum conformance requirements

14.4.3.2.0.1 Minimum conformance requirements for RRC-based Active BWP switch

The The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with one or more than one BWP configuration(s) configured, with

- Active BWP switch or parameter change of its active BWPs for PCell

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL

slot right after a time duration of $\frac{T_{RRCprocessing\,Delay}+T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot containing the RRC command, and

$NR\ Slot\ length$ is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessing\,Delay}$ is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [13], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

The normative reference for this requirement is TS 38.133 [6] clause 8.6C.3.

14.4.3.2.1 NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access

Editor's Note: This test is incomplete in the following aspects:

- MU and TT analysis is incomplete
- Message contents may need to be updated
- Several test parameters and configuration are still FFS

14.4.3.2.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 14.4.3.2.0.1.

14.4.3.2.1.2 Test applicability

This test applies to all types of NR UE release 17 onwards supporting BWP adaptation of at least 2 BWPs and satellite access.

14.4.3.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.4.3.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.3.2.1.

14.4.3.2.1.4 Test description

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot (i + $\frac{T_{\mathrm{RRCprocessingDelay}}+T_{\mathrm{BWPswitchDelayRRC}}}{\mathrm{NR\,Slot\,length}}$) as defined in clause 14.4.3.2.0 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot ($i + \frac{T_{\mathrm{RRCprocessingDelay}}+T_{\mathrm{BWPswitchDelayRRC}}}{\mathrm{NR\,Slot\,length}} + k1 + 2^{\mu-\mu_{K_{offset}}}K_{offset}$) on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot (i + $\frac{T_{\mathrm{RRCprocessingDelay}}+T_{\mathrm{BWPswitchDelayRRC}}}{\mathrm{NR\,Slot\,length}}$).

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 14.4.3.2.0.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a vaild ACK/NACK is received is received.

14.4.3.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.3.2.1.4.1-1.

Table 14.4.3.2.1.4.1-1: Supported test configurations for NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access

Configuration	Description
14.4.3.2.1-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.4.3.2.1-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.4.3.2.1.4.1-2.

Table 14.4.3.2.1.4.1-2: Initial conditions for NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.3.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.4.3.2.1.4.1-3.
2. Message contents are defined in clause 14.4.3.2.1.4.3.
3. The test scenario comprises of one satellite access NR Cell (Cell 1). Cell 1 is configured according to Annex C.1.2 and C.1.3.
4. The initial test environment conditions are setup according to section 14.0.5.
5. By step 4 of the test procedure:
   - UE is connected to Cell 1 on radio channel 1.
   - UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
   - UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

Table 14.4.3.2.1.4.1-3: General test parameters for NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	

T1	s	0.2	

14.4.3.2.1.4.2 Test procedure

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Cell 1 has constant signal level throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Tables 14.4.3.2.1.4.1-3 and 14.4.3.2.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.
3. The SS shall send an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures another UE-specific bandwidth part, BWP-1 and indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to the initial condition of Active BWP-1 in Table 14.4.3.2.1.5-1.
4. The UE shall transmit an *RRCReconfigurationComplete* message.
5. The SS shall send an *RRCReconfiguration* message with updated bandwidth part configuration for DL BWP switch, change the BWP according to the final condition of Active BWP-1 in Table 14.4.3.2.1.5-1. T1 starts.
6. The UE shall receive the *RRCReconfiguration* in PCell's slot # denoted i and reconfigure its bandwidth part with the updated bandwidth part configuration.
7. If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i + X + k1 + 2^{\mu - \mu_{K_{offset}}} K_{offset}$), then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one. Where:

   - X = 16 for both test configurations 14.4.3.2.1-1 and 14.4.3.2.1-2.
8. After the SS receives the ACK/NACK in step 7 or when T1 expires, the SS shall transmit *RRCRelease* message to release the RRC connection.
9. The SS shall switch off and then on the UE.
10. Repeat steps 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a valid ACK/NACK is received.

14.4.3.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.4.3.2.1.4.3-1: Common Exception messages for NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	

Table 14.4.3.2.1.4.3-1A: *RRCReconfiguration* (1, Step 3, Step 5) for NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			

rrcReconfiguration SEQUENCE {			
radioBearerConfig	Not present		
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 14.4.3.2.1.4.3-1B	
dedicatedNAS-MessageList	Not present		
}			
}			
}			
}			

Table 14.4.3.2.1.4.3-1B: *CellGroupConfig* (Table 14.4.3.2.1.4.3-1A) for NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 14.4.3.2.1.4.3-1C	
}			
}			

Table 14.4.3.2.1.4.3-1C: *ServingCellConfig* (Table 14.4.3.2.1.4.3-1B) for NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1] SEQUENCE {	BWP-Downlink	entry 1 Table 14.4.3.2.1.4.3-1D	
}			
firstActiveDownlinkBWP-Id	1	BWP-1	
defaultDownlinkBWP-Id	1	BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1	

		Table 14.4.3.2.1.4.3-1E	
}			
firstActiveUplinkBWP-Id	1	BWP-1	
}			
}			

Table 14.4.3.2.1.4.3-1D: *BWP-Downlink* (Table 14.4.3.2.1.4.3-1C) for NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 5
}			
}			

Table 14.4.3.2.1.4.3-1E: *BWP-Uplink* (Table 14.4.3.2.1.4.3-1C) for NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 5
}			
}			

14.4.3.2.1.5 Test requirements

Tables 14.4.3.2.1.4.1-3 and 14.4.3.2.1.5-1 define the primary level settings including test tolerances for NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access.

Table 14.4.3.2.1.5-1: NR Cell specific test parameters for NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1, 2		FDD
$BW_{channel}$	Config 1, 2		10 MHz: $N_{PRB,c}$ = 52
Serving Satellite Configuration	Config 1, 2		*[SSC.1] or [SSC.2] [NOTE: SSC.1 and SSC.2 are Serving Satellite Configurations for GSO and NGSO, respectively. The selection between the two is up to UE capability, and SSC.2 is selected if DUT supports both]*
Active BWP ID			1
Initial DL BWP Configuration	Config 1, 2		DLBWP.0.2

Parameter			Unit	Cell 1
Initial UL BWP Configuration		Config 1, 2		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1, 2		DLBWP.1.3
	Active UL BWP-1 Configuration	Config 1, 2		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1, 2		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1, 2		ULBWP.1.1
PDSCH Reference measurement channel		Config 1, 2		SR.1.1 FDD
RMSI CORESET parameters		Config 1, 2		CR.1.1 FDD
Dedicated CORESET parameters		Config 1, 2		CCR.1.2 FDD
OCNG Patterns				OP.1
SSB Configuration		Config 1, 2		SSB.1 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1, 2		TRS.1.1 FDD
Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		Config 1, 2	dBm/SCS	-104+TT
SS-RSRP Note 3		Config 1, 2	dBm/SCS	-87+TT
$\hat{E}_s/I_{ot}$			dB	17+TT
$\hat{E}_s/N_{oc}$			dB	17+TT
Io Note3		Config 1, 2	dBm/ 9.36 MHz	-58.96+TT

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the beginning of slot ($i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$) and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1 + 2^{\mu - \mu_{K_{offset}}} K_{offset}$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

14.4.4 UE specific CBW change for SAN

14.4.4.0 Minimum conformance requirements

14.4.4.0.1 Minimum conformance requirements for UE specific CBW change for SAN

The requirements in this clause apply for a UE receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on an active DL BWP or transmit PUSCH on an active UL BWP of the new CBW right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot containing the RRC command, and

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in millisecond as defined in clause 12 in TS 38.331 [13], and

$T_{CBWchangeDelayRRC} = 6ms$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ on the cell where UE-specific CBW change occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

The normative reference for this requirement is TS 38.133 [6] clause 8.13C.

14.4.4.1 NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access

Editor's Note: This test is incomplete in the following aspects:

- MU and TT analysis is incomplete
- Several test parameters and configuration are still FFS

14.4.4.1.1 Test purpose

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 14.4.4.0.1.

14.4.4.1.2 Test applicability

This test applies to all types of NR UE release 17 onwards supporting satellite access.

14.4.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.4.4.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.4.4.1.

14.4.4.1.4 Test description

The test scenario comprises of one Cell, PCell (Cell 1), which has constant signal levels throughout the test. The test consists of 1 time period with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* containing *SCS-SpecificCarrier* with updated UE specific CBW, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its UE specific CBW with the updated CBW-2 for the final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $(i + \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length})$ as defined in clause 14.4.4.0 and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(i + \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1 + 2^{\mu-\mu_{K_{offset}}}K_{offset})$ on the PCell's BWP-1 on CBW-2 for the final condition. The UE shall be continuously scheduled on the PCell's BWP-1 on CBW-2 for the final condition starting from the first DL slot right after slot $(i + \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length})$.

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 14.4.4.0.

The test equipment verifies the UE specific CBW switching delay in PCell by estimating the time from the moment the RRC Reconfiguration message including updated UE specific CBW configuration is sent until the moment a vaild ACK/NACK is received.

14.4.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.4.4.1.4.1-1.

Table 14.4.4.1.4.1-1: Supported test configurations for NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access

14.4.4.1-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.4.4.1-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.4.4.1.4.1-2.

Table 14.4.4.1.4.1-2: Initial conditions for NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.4.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.4.4.1.4.1-3.

2. Message contents are defined in clause 14.4.4.1.4.3.

3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the satellite access NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

4. The initial test environment conditions are setup according to section 14.0.5.

5. By step 3 of the test procedure:

   - UE is connected to Cell 1 (PCell) on radio channel 1.

   - UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).

- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PCell.
- UE has been configured with UE specific CBW (CBW-1).
- UE is indicated in *SCS-SpecificCarrier* [13] that the UE specific CBW is CBW-1 as the initial condition in Cell 1 (PCell).

Table 14.4.4.1.4.1-3: General test parameters for NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

14.4.4.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Tables 14.4.4.1.4.1-3 and 14.4.4.1.5-1. Propagation conditions are set according to Annex C clauses C.2.2.
3. The SS starts sending PDCCHs indicating new transmissions continuously on Cell 1 to ensure that the UE sends ACK/NACK during the test.
4. The SS sends an *RRCReconfiguration* message containing *SCS-SpecificCarrier* with updated UE specific CBW (CBW-2), dedicated BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP.
5. T1 starts from the beginning of slot i, where slot i is the last slot carrying the PDSCH containing the *RRCReconfiguration* message in step 4. The SS shall continuously schedule the PCell's BWP-1 on CBW-2 starting from the first DL slot right after slot ($i + \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$).
6 If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i + \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1 + 2^{\mu-\mu_{K_{offset}}} K_{offset}$), then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
7. After the SS receives the ACK/NACK in step 6 or when T1 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources. Then the SS shall switch off and then on the UE.
8. Repeat steps 1-7 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.4.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.4.4.1.4.3-1:*ServingCellConfigCommon* (step 1 and step 4) for NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-168			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon::= SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
genericParameters	Set according to DLBWP.0.2		
}			
uplinkConfigCommon SEQUENCE {			
initialUplinkBWP SEQUENCE {	BWP-UplinkCommon		

genericParameters	Set according to ULBWP.0.2		
}			
}			
}			

Table 14.4.4.1.4.3-2: *ServingCellConfig* (step 1 and step 4) for NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
uplinkConfig SEQUENCE {			
uplinkChannelBW-PerSCS-List SEQUENCE (SIZE (1..maxSCSs)) OF SCS-SpecificCarrier {	1 entry		
SCS-SpecificCarrier[1]	SCS-SpecificCarrier-UL	Entry 1 Table 14.4.4.1.4.3-4	
}			
}			
downlinkChannelBW-PerSCS-List SEQUENCE (SIZE (1..maxSCSs)) OF SCS-SpecificCarrier {	1 entry		
SCS-SpecificCarrier[1]	SCS-SpecificCarrier-DL	Entry 1 Table 14.4.4.1.4.3-3	
}			
}			

Table 14.4.4.1.4.3-3: *SCS-SpecificCarrier-DL* (step 1 and step 4) for NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14] Table 4.6.3-160			
Information Element	**Value/remark**	**Comment**	**Condition**
SCS-SpecificCarrier ::= SEQUENCE {			
offsetToCarrier	The offset between point A and the lowest PRB index to guarantee the CBW including SSB and CORESET#0	CBW-1 (DLCBW.1.1)	step 1
	The offset between Point A and the lowest usable subcarrier on this carrier, i.e. the offsetToCarrier given in 38.508-1[14] clause 4.3.1.	CBW-2 (DLCBW.1.2)	step 4
}			

Table 14.4.4.1.4.3-4: *SCS-SpecificCarrier-UL* (step 1 and step 4) for NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access

Derivation Path: TS 38.508-1 [14] Table 4.6.3-160			
Information Element	**Value/remark**	**Comment**	**Condition**
SCS-SpecificCarrier ::= SEQUENCE {			
offsetToCarrier	Any offset within the CBW of test frequency given in 38.508-1[14] clause 4.3.1.and different with offsetToCarrier of ULCBW.1.2	CBW-1 (ULCBW.1.1)	step 1
	The offset between Point A and the lowest usable subcarrier on this carrier, i.e. the offsetToCarrier given in 38.508-1[14] clause 4.3.1.	CBW-2 (ULCBW.1.2)	step 4
}			

14.4.4.1.5 Test requirement

Tables 14.4.4.1.4.1-3 and 14.4.4.1.5-1 define the primary level settings including test tolerances for NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access.

Table 14.4.4.1.5-1: NR Cell specific test parameters for NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1, 2		FDD
$BW_{channel}$		Config 1, 2		10 MHz: $N_{PRB,c}$ = 52
Serving Satellite Configuration		Config 1, 2		*[SSC.1] or [SSC.2]* *[NOTE: SSC.1 and SSC.2 are Serving Satellite Configurations for GSO and NGSO, respectively. The selection between the two is up to UE capability, and SSC.2 is selected if DUT supports both]*
Active DL BWP ID		Config 1, 2		1
Initial DL BWP Configuration (BWP-1)		Config 1, 2		DLBWP.0.2
Initial UL BWP Configuration		Config 1, 2		ULBWP.0.2
Initial Condition	Active DLCBW-1 Configureation	Config 1, 2		DLCBW.1.1
	Active UL CBW-1 Configuration	Config 1, 2		ULCBW.1.1
Final Condition	Active DLCBW-1 Configureation	Config 1, 2		DLCBW.1.2
	Active UL CBW-1 Configuration	Config 1, 2		ULCBW.1.2
PDSCH Reference measurement channel		Config 1, 2		SR.1.1 FDD
RMSI CORESET parameters		Config 1, 2		CR.1.1 FDD
Dedicated CORESET parameters		Config 1, 2		CCR.1.1 FDD
OCNG Patterns				OP.1
SSB Configuration		Config 1, 2		SSB.1 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1, 2		TRS.1.1 FDD
Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		Config 1, 2	dBm/SCS	-104+TT
SS-RSRP Note 3		Config 1, 2	dBm/SCS	-87+TT
$\hat{E}_s/I_{ot}$			dB	17+TT
$\hat{E}_s/N_{oc}$			dB	17+TT
Io Note3		Config 1, 2	dBm/ 9.36 MHz	-58.96+TT

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

During T1, the UE shall be ready for the reception of uplink grant for the PCell from the first DL slot that occurs right after the begining of slot ($i + \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$) and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i + \frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1 + 2^{\mu-\mu_{K_{offset}}} K_{offset}$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [12].

All of the above test requirements shall be fulfilled in order for the observed UE specific CBW change delay on the PCell to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

14.5 Measurement procedure

14.5.1 Intra-frequency Measurements for SAN

14.5.1.0 Minimum conformance requirements

14.5.1.0.1 Minimum conformance requitements for intra-frequency measurements without measurement gaps

14.5.1.0.1.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_without_index}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise, UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index}$.

$$T_{identify_intra_without_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra})\ ms$$

$$T_{identify_intra_with_index} = (T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra})\ ms$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 14.5.1.0.1.1-1

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in table 14.5.1.0.1.1-2

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 14.5.1.0.1.2-1

K_{multi_SMTC} is the scaling factor for measurement of multiple SMTCs or multiple satellites, and

if SMTCs do not overlap with each other,

- $K_{multi_SMTC} = 1$, if GEO satellites are measured on the carrier;
- $K_{multi_SMTC} = \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if LEO satellites are measured on the carrier;

if SMTCs partially overlap with each other,

- $K_{multi_SMTC} = N_{SMTC,overlap}$, if only GEO satellites are measured on the carrier;
- $K_{multi_SMTC} = \sum_{i=1}^{N_{SMTC,overlap}} \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if only LEO satellites are measured on the carrier;

where

- $N_{LEO,i}$ is the number of LEO satellites to be measured within i-th SMTC,
- $N_{LEO,simul}$ is the number of LEO satellites that UE can measure in parallel within an SMTC,
- $N_{SMTC,overlap}$ is the number of SMTCs that partially overlap with each other.

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in 38.133 [6] clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps, or according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps, i.e. when intra-frequency SMTC is fully overlapping with measurement gaps.

if the high layer in TS 38.331 [13] signalling of *smtc2* is configured, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

K_p is the scaling factor for an SSB frequency layer to be measured without measurement gaps. $K_p = N_{total_SAN} / N_{available_SAN}$, where $N_{available_SAN}$ and N_{total_SAN} are calculated as follows:

- For a window W of duration max(SMTC period, MGRP_max), where
  - If UE supports *parallelMeasurementGap-r17* and is configured with concurrent measurement gaps, MGRP max is the maximum MGRP across all configured per-UE measurement gap. Otherwise, MGRP max is the MGRP of configured measurement gap.
  - Starting from the beginning of any SMTC occasion:
    - N_{total_SAN} is the total number of SMTC occasions within the window, including those overlapped and non-overlapped with measurement gap occasions within the window, and
    - $N_{available_SAN}$ is the number of SMTC occasions within the window W that don't collide with any non-dropped MG occasion within or outside the window W, after accounting for measurement gap collisions by applying the measurement gap collision rule in 38.133 [6] section 9.1C.8.3. The collision rule between SMTC occasion and measurement gap occasion is defined in 38.133 [6] section 9.1C.9.1

K_p = [1] when $N_{available_SAN} = 0$ and measurement gap sharing in 38.133 [6] clause 9.1.2.1a shall apply.

$K_p = 1$ when intra-frequency SMTC is fully non overlapping with measurement gaps.

For calculation of Kp, if the high layer signalling (TS 38.331 [13]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*.

$K_{layer1_measurement}$: it is scaling factor for sharing between L3 and L1 measurement, and $K_{layer1_measurement} = 1$, if GEO satellites are measured on the carrier, or if LEO satellites are measured on the carrier and UE supports *parallelMeasurementWithoutRestriction*, otherwise

$K_{layer1_measurement} = 1$,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or
- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement} = 1.5$, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

If the higher layer signalling in TS38.331 [13] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$.

Table 14.5.1.0.1.1-1: Time period for PSS/SSS detection, (Frequency range FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, ceil(5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x 5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 14.5.1.0.1.1-2: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	max(120ms, ceil(3 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil (1.5 x 3 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	Ceil(3 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

The requirements in clause 14.5.1.0.1.1 and 14.5.1.0.1.2 are not applicable when the overall overhead ratio due to scheduling restriction caused by all configured SMTCs (i.e. scheduling restriction overhead of all SMTCs in one SMTC periodicity), is larger than 75%.

The normative reference for this requirement is TS 38.133 [6] clause 9.2C.5.1.

14.5.1.0.1.2 Measurement period

The measurement period for intra-frequency measurements without gaps is as shown in table 14.5.1.0.1.2-1.

If the higher layer signalling in TS38.331 [13] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{SSB_measurement_period_intra}$.

Table 14.5.1.0.1.2-1: Measurement period for intra-frequency measurements without gaps (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, ceil(5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x SMTC period)[Note 1] x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x max(SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	ceil(5 x K_p x $K_{layer1_measurement}$) x K_{multi_SMTC} x DRX cycle x $CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

The normative reference for this requirement is TS 38.133 [6] clause 9.2C.5.2.

14.5.1.0.1.3 Scheduling availability of UE during intra-frequency measurements

When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged (in TS

38.331 [13]), if it is configured; otherwise, all *L* SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [8] are included.

The normative reference for this requirement is TS 38.133 [6] clause 9.2C.5.3.

14.5.1.0.1.3.1 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [11] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement:

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer signalling of *smtc2* is configured (in TS 38.331 [13]), the SMTC periodicity follows *smtc2*; Otherwise, the SMTC periodicity follows *smtc1*.

- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [13], the SMTC periodicity follows *smtc2*; Otherwise, the SMTC periodicity follows *smtc1*.

The normative reference for this requirement is TS 38.133 [6] clause 9.2C.5.3.1.

14.5.1.0.1.3.2 Scheduling availability of UE performing measurements on a neighbor cell served by a different satellite in LEO

For UE which do not support *TBD* the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement on a neighbor cell served by a different satellite in LEO.

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer signalling of *smtc2* is configured (in TS 38.331 [13]), the SMTC periodicity follows *smtc2*; Otherwise, the SMTC periodicity follows *smtc1*.

- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [13], the SMTC periodicity follows *smtc2*; Otherwise, the SMTC periodicity follows *smtc1*.

- If the following conditions are met:

  - The UE has been notified about system information update through paging,

  - The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots

- The UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and/or the corresponding PDSCH, on SSB symbols to be measured.

The normative reference for this requirement is TS 38.133 [6] clause 9.2C.5.3.2.

14.5.1.0.2 Minimum conformance requitements for intra-frequency measurements with measurement gaps

14.5.1.0.2.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise, the UE shall be able to identify a new

detectable intra frequency cell within $T_{identify_intra_with_index}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index}$

$$T_{identify_intra_without_index} = T_{PSS/SSS_sync_intra} + T_{SSB_measurement_period_intra} \text{ ms}$$

$$T_{identify_intra_with_index} = T_{PSS/SSS_sync_ntra} + T_{SSB_measurement_period_intra} + T_{SSB_time_index_intra} \text{ ms}$$

Where:

T_{PSS/SSS_sync_intra}: it is the time period used in PSS/SSS detection given in table 14.5.1.0.2.1-1.

$T_{SSB_time_index_intra}$: it is the time period used to acquire the index of the SSB being measured given in table 14.5.1.0.2.1-2.

$T_{SSB_measurement_period_intra}$: equal to a measurement period of SSB based measurement given in table 14.5.1.0.2.2-1.

K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. K_{gap} = 1 when the UE is not configured with concurrent measurement gaps. When the UE is configured with concurrent measurement gaps and the two measurement gaps are fully overlapping with MGRP=160ms, K_{gap} = 2. Otherwise, $K_{gap} = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

$CSSF_{intra}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1.5.2 for measurement conducted within measurement gaps.

K_{multi_SMTC} is the scaling factor for measurement of multiple SMTCs or multiple satellites, and

if SMTCs within a measurement gap do not overlap with each other,

- $K_{multi_SMTC} = 1$, if GEO satellites are measured on the carrier;
- $K_{multi_SMTC} = \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if LEO satellites are measured on the carrier;

if SMTCs within a measurement gap partially overlap with each other,

- $K_{multi_SMTC} = N_{SMTC,overlap}$, if only GEO satellites are measured on the carrier;
- $K_{multi_SMTC} = \sum_{i=1}^{N_{SMTC,overlap}} \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if only LEO satellites are measured on the carrier;

where

- $N_{LEO,i}$ is the number of LEO satellites to be measured within i-th SMTC,
- $N_{LEO,simul}$ is the number of LEO satellites that UE can measure in parallel within an SMTC,
- $N_{SMTC,overlap}$ is the number of SMTCs that partially overlap with each other.

If the higher layer signaling in TS 38.331 [13] of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$.

Table 14.5.1.0.2.1-1: Time period for PSS/SSS detection (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	max(600ms, 5 x K_{gap} x K_{multi_SMTC} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x 5) x K_{gap} x K_{multi_SMTC} x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x K_{gap} x K_{multi_SMTC} x max(MGRP, DRX cycle) x $CSSF_{intra}$

Table 14.5.1.0.2.1-2: Time period for time index detection (Frequency range FR1)

DRX cycle	$T_{SSB_time_index_intra}$

No DRX	max(120ms, 3 x K_{gap} x K_{multi_SMTC} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(120ms, ceil(1.5 x 3) x K_{gap} x K_{multi_SMTC} x max(MGRP, SMTC period,DRX cycle) x $CSSF_{intra}$)
DRX cycle>320ms	3 x K_{gap} x K_{multi_SMTC} x max(MGRP, DRX cycle) x $CSSF_{intra}$

The normative reference for this requirement is TS 38.133 [6] clause 9.2C.6.1 and 9.2C.6.2.

14.5.1.0.2.2 Intra-frequency measurement period

The measurement period for FR1 intrafrequency measurements with gaps is as shown in table 14.5.1.0.2.2-1.

Table 14.5.1.0.2.2-1: Measurement period for intra-frequency measurements with gaps (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	max(200ms, 5 x K_{gap} x K_{multi_SMTC} x max(MGRP, SMTC period)) x $CSSF_{intra}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5) x K_{multi_SMTC} x K_{gap} x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra}$
DRX cycle>320ms	5 x K_{gap} x K_{multi_SMTC} x max(MGRP, DRX cycle) x $CSSF_{intra}$

The normative reference for this requirement is TS 38.133 [6] clause 9.2C.6.3.

14.5.1.1 NR SA FR1 Event-triggered reporting tests without gap under non-DRX for NR satellite access

14.5.1.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 14.5.1.0.1.1 and 14.5.1.0.1.2.

14.5.1.1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.5.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.1.1.

14.5.1.1.4 Test description

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table 14.5.1.1.4.1-1,14.5.1.1.4.1-3 and 14.5.1.1.5-1 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The UE shall be provided with the valid information about the SAN serving each cell in the test before the start of the test.

UE is configured with 2 non-overlapping SMTCs for the intra-frequency measurement. The SMTC periodicity is 20ms, and SMTC1 is associated with Cell 1 with offset 0, and SMTC2 is associated with Cell 2 with offset 10ms.

14.5.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.1.1.4.1-1.

Table 14.5.1.1.4.1-1: Supported test configurations for NR SA FR1 Event-triggered reporting tests without gap under non-DRX for NR satellite access

Configuration	Description
14.5.1.1-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.1.1-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.5.1.1.4.1-2.

Table 14.5.1.1.4.1-2: Initial conditions for NR SA FR1 Event-triggered reporting tests without gap under non-DRX for NR satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.5.1.1.4.1-3.
2. Message contents are defined in clause 14.5.1.1.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbor cell, respectively) with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.1.1.4.1-3: General test parameters for NR SA FR1 Event-triggered reporting tests without gap under non-DRX for NR satellite access

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1	Cell 1 and Cell 2
SMTC1 configuration		1	SMTC.1	Period: 20ms, offset: 0
SMTC2 configuration		2	SMTC.4	Period: 20ms, offset: 10ms
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between serving and neighbour cells	ms	1, 2	10	Asynchronous cells. The timing of Cell 2 is 10ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

14.5.1.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The UE is not required to read the neighbour cell SSB index in this test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR, Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 14.5.1.1.5-1.
3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an intra-frequency measurement object, event A3, and SMTC configuration according to Table 14.5.1.1.4.1-3.
4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.1.1.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than 802 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
9. Once the connection is released, the SS shall switch OFF and then ON the UE.
10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.5.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.1.1.4.3-1: Common Exception messages for NR SA FR1 Event-triggered reporting tests without gap under non-DRX for NR satellite access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 1 (for config 1) or SMTC pattern 4 (for config 2), and Asynchronous cells Table H.3.1-4 with A3-offset = -4.5 dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ

14.5.1.1.5 Test requirements

Tables 14.5.1.1.4.1-3 and 14.5.1.1.5-1 define the primary level settings including test tolerances for NR SA FR1 Event-triggered reporting tests without gap under non-DRX for NR satellite access.

Table 14.5.1.1.5-1: Cell specific test parameters for NR SA FR1 Event-triggered reporting tests without gap under non-DRX for NR satellite access

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	

		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS Configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.59	-62.25	-64.59	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.1.2 NR SA FR1 Event triggered reporting tests without gap under DRX for NR satellite access

Editor's Note:

- Test requirements might need to be updated for UEs not reporting *maxNumber-NGSO-SatellitesWithinOneSMTC*

14.5.1.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 14.5.1.0.1.1 and 14.5.1.0.1.2.

14.5.1.2.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and long DRX cycle.

14.5.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.1.2.

14.5.1.2.4 Test description

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table 14.5.1.2.4.1-1,14.5.1.2.4.1-3 and 14.5.1.2.5-1 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The UE shall be provided with the valid information about the SAN serving for each cell in the test before the start of the test.

UE is configured with 1 SMTC for the intra-frequency measurement. Both Cell 1 and Cell 2 are associated with the configured SMTC.

14.5.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.1.2.4.1-1.

Table 14.5.1.2.4.1-1: Supported test configurations for NR SA FR1 Event triggered reporting tests without gap under DRX for NR satellite access

Configuration	Description
14.5.1.2-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.1.2-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.5.1.2.4.1-2.

Table 14.5.1.2.4.1-2: Initial conditions for NR SA FR1 Event triggered reporting tests without gap under DRX for NR satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.5.1.2.4.1-3.
2. Message contents are defined in clause 14.5.1.2.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbor cell, respectively) with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.1.2.4.1-3: General test parameters for NR SA FR1 Event triggered reporting tests without gap under DRX for NR satellite access

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	Cell 1		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1		Cell 1 and Cell 2
SMTC configuration		1, 2	SMTC.2		
A3-Offset	dB	1, 2	-4.5		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX. 7	
Time offset between serving and neighbour cells	μs	1, 2	3		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	5	10	

14.5.1.2.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

The UE is not required to read the neighbour cell SSB index in this test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR, Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 14.5.1.2.5-1.

3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an intra-frequency measurement object, event A3, and SMTC configuration according to Table 14.5.1.2.4.1-3.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.1.2.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delay measured from the beginning of time period T2 is less than X ms for Test 1, or Y ms for Test 2 then the number of successful tests is increased by one. Where X and Y are defined as:

   - For configuration 2, if the UE reports *maxNumber-NGSO-SatellitesWithinOneSMTC* as ‘n1’:

     - X = 1282ms

     - Y = 12802ms

   - Otherwise:

     - X = 922ms

     - Y = 6402ms

   If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Once the connection is released, the SS shall switch OFF and then ON the UE.

10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 14.5.1.2.4.1-3 as appropriate.

14.5.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.1.2.4.3-1: Common Exception messages for NR SA FR1 Event triggered reporting tests without gap under DRX for NR satellite access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 2, and Synchronous cells Table H.3.1-4 with A3-offset = -4.5 dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.7-1 with Condition DRX.1 and Gap and INTER-FREQ for Test 1 Table H.3.7-1 with Condition DRX.7 and Gap and INTER-FREQ for Test 2

14.5.1.2.5 Test requirements

Tables 14.5.1.2.4.1-3 and 14.5.1.2.5-1 define the primary level settings including test tolerances for NR SA FR1 Event triggered reporting tests without gap under DRX for NR satellite access.

Table 14.5.1.2.5-1: Cell specific test parameters for NR SA FR1 Event triggered reporting tests without gap under DRX for NR satellite access

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			

$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.59	-62.25	-64.59	-62.25
Propagation Condition		1, 2	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. X=1280 for test configuration 2 and if UE indicates 'n1' for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise X=920.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than Y ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. Y=12800 for test configuration 2 and if UE indicates 'n1' for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise Y=6400.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.1.3 NR SA FR1 event triggered reporting tests without gap under non-DRX with FDD PCell with SSB index reading for NR satellite access

Editor's Note:

- Test requirements might need to be updated for UEs not reporting *maxNumber-NGSO-SatellitesWithinOneSMTC*

14.5.1.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clauses 14.5.1.0.1.1 and 14.5.1.0.1.2.

14.5.1.3.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.5.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.1.3.

14.5.1.3.4 Test description

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table 14.5.1.3.4.1-1 and 14.5.1.3.4.1-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The UE shall be provided with the valid information about the SAN serving each cell in the test before the start of the test.

UE is configured with 2 overlapping SMTC for the intra-frequency measurement. The SMTC periodicity is 20ms, and SMTC1 is associated with Cell 1 with offset 0, and SMTC2 is associated with Cell 2 with offset 17ms.

14.5.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.1.3.4.1-1.

Table 14.5.1.3.4.1-1: Supported test configurations for NR SA FR1 event triggered reporting tests without gap under non-DRX with FDD PCell with SSB index reading for NR satellite access

Configuration	Description
14.5.1.3-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.1.3-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.5.1.3.4.1-2.

Table 14.5.1.3.4.1-2: Initial conditions for NR SA FR1 event triggered reporting tests without gap under non-DRX with FDD PCell with SSB index reading for NR satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.5.1.3.4.1-3.
2. Message contents are defined in clause 14.5.1.3.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbor cell, respectively) with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.1.3.4.1-3: General test parameters for NR SA FR1 event triggered reporting tests without gap under non-DRX with FDD PCell with SSB index reading for NR satellite access

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1	Cell 1 and Cell 2
SSB configuration		1, 2	SSB.1 FR1	
SMTC1 configuration		1, 2	SMTC.2	
SMTC2 configuration		1, 2	SMTC.6	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX	ms	1, 2	OFF	

Time offset between serving and neighbour cells	ms	1, 2	3	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

14.5.1.3.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR*, *Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 14.5.1.3.5-1.
3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an intra-frequency measurement object, event A3, and SMTC configuration according to Table 14.5.1.3.4.1-3.
4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.1.3.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than X ms, then the number of successful tests is increased by one. Where X is defined as:

   - For configuration 2, if the UE reports *maxNumber-NGSO-SatellitesWithinOneSMTC* as ‘n1’:

     - X = 922ms

   - Otherwise:

     - X = 802ms

   If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
9. Once the connection is released, the SS shall switch OFF and then ON the UE.
10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.5.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.1.3.4.3-1: Common Exception messages for NR SA FR1 event triggered reporting tests without gap under non-DRX with FDD PCell with SSB index reading for NR satellite access

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 2 (for config 1) or SMTC pattern 6 (for config 2), and Asynchronous cells Table H.3.1-4 with A3-offset = -4.5 dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ and SSB Index

14.5.1.3.5 Test requirements

Tables 14.5.1.3.4.1-3 and 14.5.1.3.5-1 define the primary level settings including test tolerances for NR SA FR1 event triggered reporting tests without gap under non-DRX with FDD PCell with SSB index reading for NR satellite access.

Table 14.5.1.3.5-1: Cell specific test parameters for NR SA FR1 event triggered reporting tests without gap under non-DRX with FDD PCell with SSB index reading for NR satellite access

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0,1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.59	-62.25	-64.59	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test. X=920 for test configuration 2 and if UE indicates ‘n1’ for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise X=800.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.1.4 NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Editor's Note:

- Test requirements might need to be updated for UEs not reporting *maxNumber-NGSO-SatellitesWithinOneSMTC*
- BWP index to be configured needs to be corrected in 38.133 (BWP-0 containing CD-SSB, BWP-1 not containing CD-SSB)

14.5.1.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA intra-frequency NR cell search requirements in clause 14.5.1.0.2.

14.5.1.4.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and CSI-RS based RLM.

14.5.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.1.4.

14.5.1.4.4 Test description

Two cells are deployed in the test, which are NR FR1 PCell (Cell 1) and a NR FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Tables 14.5.1.4.4.1-1, 14.5.1.4.4.1-3 and 14.5.1.4.5-1 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

14.5.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.1.4.4.1-1.

Table 14.5.1.4.4.1-1: Supported test configurations for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Configuration	Description
14.5.1.4-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.1.4-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 14.5.1.4.4.1-2.

Table 14.5.1.4.4.1-2: Initial conditions for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.	
Channel bandwidth	As specified by the test configuration selected from Table 14.5.1.4.4.1-1.	
Propagation conditions	AWGN	As specified in clause C.2.2.

Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.5.1.4.4.1-3.
2. Message contents are defined in clause 14.5.1.4.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbor cell, respectively) with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.1.4.4.1-3: General test parameters for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1	Cell 1 and Cell 2
Measurement gap type		1, 2	Per-UE gaps	
Gap Pattern ID		1, 2	0	As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap repetition periodicity	ms	1, 2	40	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	39	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX	ms	1, 2	OFF	
Time offset between serving and neighbour cells	ms	1,2	3	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

14.5.1.4.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, [BWP1] which contains the cell defining SSB, and [BWP2] which does not contain any SSB of Cell 1. During the whole test, [BWP2] is always scheduled as the active BWP for the UE.

UE is configured with 1 SMTC for the intra-frequency measurement. Both Cell 1 and Cell 2 are associated with the configured SMTC.

The UE is not required to read the neighbour cell SSB index in this test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR, Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 14.5.1.4.5-1.
3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an intra-frequency measurement object, event A3, gap configuration, and SMTC configuration according to Tables 14.5.1.4.4.1-3 and 14.5.1.4.5-1.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.1.4.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than X ms, then the number of successful tests is increased by one. Where X is defined as:

   - For configuration 2, if the UE reports *maxNumber-NGSO-SatellitesWithinOneSMTC* as 'n1':

     - X = 1602ms

   - Otherwise:

     - X = 1002ms

   If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
9. Once the connection is released, the SS shall switch OFF and then ON the UE.
10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.5.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.1.4.4.3-1: Common Exception messages for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 2, and Asynchronous cells Table H.3.1-4 with A3-offset = -4.5 dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 and gap offset = 39 Table H.3.1-7 with Condition INTRA-FREQ and SSB Index

14.5.1.4.5 Test requirements

Tables 14.5.1.4.4.1-3 and 14.5.1.4.5-1 define the primary level settings including test tolerances for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access.

Table 14.5.1.4.5-1: Cell specific test parameters for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
SMTC configuration		1, 2	SMTC.2		SMTC.2	

CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.2 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.59	-62.25	-64.59	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. X=1600 for test configuration 2 and if UE indicates 'n1' for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise X=1000.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.1.5 NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Editor's Note:

- Mismatching measurement gap config in 38.133 (Gap pattern ID 1, and mgrp = 40ms) needs to be corrected
- SMTC pattern Y needs to be updated
- BWP index to be configured needs to be corrected in 38.133 (BWP-0 containing CD-SSB, BWP-1 not containing CD-SSB)

14.5.1.5.1 Test purpose

The purpose of this test is to verify that the multiple gaps capable UE makes correct reporting of an event. This test will partly verify the SA intra-frequency NR cell search requirements in clause 14.5.1.0.2.

14.5.1.5.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access, 2 parallel measurement gaps (*parallelMeasurementGap-r17*, TS 38.306), CSI-RS based RLM and long DRX cycle.

14.5.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.1.5.

14.5.1.5.4 Test description

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Tables 14.5.1.5.4.1-1, 14.5.1.5.4.1-3 and 14.5.1.5.5-1 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The UE is configured with 2 concurrent and fully non-overlapping (FNO) measurement gaps for the intra-frequency measurement. Serving Cell 1 is expected to be measured within MeasGapId #0 and Neighbour Cell 2 is expected to be measured within MeasGapId #1.

14.5.1.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.1.5.4.1-1.

Table 14.5.1.5.4.1-1: Supported test configurations for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Configuration	Description
14.5.1.5-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.1.5-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 14.5.1.5.4.1-2.

Table 14.5.1.5.4.1-2: Initial conditions for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.5.1.5.4.1-3.
2. Message contents are defined in clause 14.5.1.5.4.3.

3. Cell 1 and Cell 2 are NR cells (PCell and neighbor cell, respectively) with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.

4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.1.5.4.1-3: General test parameters for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	Cell 1		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1		Cell 1 and Cell 2
Measurement gap type		1, 2	Per-UE gap		
Gap Pattern ID		1	[1]		As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap repetition periodicity	ms	1, 2	40		
Measurement gap length	ms	1, 2	6		
Measurement gap offset	ms	1, 2	19 for MeasGapId #0 4 for MeasGapId #1		
A3-Offset	dB	1, 2	-4.5		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX. 7	
Time offset between serving and neighbour cells	ms	1, 2	3		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2	5		
T2	s	1, 2	5	10	

14.5.1.5.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, [BWP1] which contains the cell defining SSB, and [BWP2] which does not contain any SSB of Cell 1. During the whole test, [BWP2] is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle.

The UE is not required to read the neighbour cell SSB index in this test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR*, *Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 14.5.1.5.5-1.

3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an intra-frequency measurement object, event A3, two parallel gap configurations, and SMTC configuration according to Tables 14.5.1.5.4.1-3 and 14.5.1.5.5-1.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.1.5.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than 922 ms for Test 1 or 6402 ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Once the connection is released, the SS shall switch OFF and then ON the UE.

10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 14.5.1.5.4.1-3 as appropriate.

14.5.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.1.5.4.3-1: Common Exception messages for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.7 FR1, [SMTC pattern Y], and Asynchronous cells Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.7-1 with Condition DRX.1 and Gap and INTER-FREQ for Test 1 Table H.3.7-1 with Condition DRX.7 and Gap and INTER-FREQ for Test 2

Table 14.5.1.5.4.3-2: *MeasGapConfig* for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70 with Condition GAP_ADD			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	2 entries		
GapConfig-r17[1] SEQUENCE {			
measGapId-r17	1	MeasGapId #1	
gapType-r17	perUE		
gapOffset-r17	19		
mgl-r17	ms6		
mgrp-r17	ms40	Gap pattern 0	
mgta-r17	ms0		
}			
GapConfig-r17[2] SEQUENCE {			
measGapId-r17	2	MeasGapId #2	
gapType-r17	perUE		
gapOffset-r17	4		
mgl-r17	ms6		
mgrp-r17	ms40	Gap pattern 0	
mgta-r17	ms0		
}			
}			

}			

14.5.1.5.5 Test requirements

Tables 14.5.1.5.4.1-3 and 14.5.1.5.5-1 define the primary level settings including test tolerances for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is used with two concurrent fully non-overlapped (FNO) gaps for satellite access.

Table 14.5.1.5.5-1: Cell specific test parameters for NR SA FR1 Event-triggered reporting without SSB time index detection when DRX is used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.7 FR1	
SMTC configuration		1, 2	SMTC.2		SMTC.Y	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.2 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.59	-62.25	-64.59	-62.25
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.1.6 NR SA FR1 Event-triggered reporting with SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Editor's Note:

- Gap index needs to be corrected in 38.133 (from #0, #1 to #1, #2)
- BWP index to be configured needs to be corrected in 38.133 (BWP-0 containing CD-SSB, BWP-1 not containing CD-SSB)

14.5.1.6.1 Test purpose

The purpose of this test is to verify that the multiple gaps capable UE makes correct reporting of an event. This test will partly verify the SA intra-frequency NR cell search requirements in clause 14.5.1.0.2.

14.5.1.6.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access, 2 parallel measurement gaps (*parallelMeasurementGap-r17*, TS 38.306) and CSI-RS based RLM.

14.5.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.1.6.

14.5.1.6.4 Test description

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Tables 14.5.1.6.4.1-1, 14.5.1.6.4.1-3 and 14.5.1.6.5-1 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The UE is configured with 2 PPO concurrent measurement gaps for the intra-frequency measurement. Serving Cell 1 is expected to be measured within MeasGapId #0 and Neighbour Cell 2 is expected to be measured within MeasGapId #1. The priority for MeasGapId #1 is higher than the priority for MeasGapId #0.

14.5.1.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.1.6.4.1-1.

Table 14.5.1.6.4.1-1: Supported test configurations for NR SA FR1 Event-triggered reporting with SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Configuration	Description
14.5.1.6-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.1.6-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 14.5.1.6.4.1-2.

Table 14.5.1.6.4.1-2: Initial conditions for NR SA FR1 Event-triggered reporting with SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.5.1.6.4.1-3.
2. Message contents are defined in clause 14.5.1.6.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbor cell, respectively) with the power level set according to clauses C.1.2 and C.1.3 for this test. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.1.6.4.1-3: General test parameters for NR SA FR1 Event-triggered reporting with SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1	Cell 1 and Cell 2
Measurement gap type		1, 2	Per-UE gap	
Gap Pattern ID		1, 2	0 for MeasGapId #0 1 for MeasGapId #1	As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap repetition periodicity	ms	1, 2	40ms for MeasGapId #0 80ms for MeasGapId #1	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	39 for MeasGapId #0 4 for MeasGapId #1	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX	ms	1, 2	OFF	
Time offset between serving and neighbour cells	ms	1, 2	5	Asynchronous cells. The timing of Cell 2 is 5ms later than the timing of serving Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

14.5.1.6.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, [BWP1] which contains the cell defining SSB, and [BWP2] which does not contain any SSB of Cell 1. During the whole test, [BWP2] is always scheduled as the active BWP for the UE.

The UE is required to report the neighbour cell SSB index in this test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR, Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 14.5.1.6.5-1.
3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an intra-frequency measurement object, event A3, two parallel gap configurations, and SMTC configuration according to Tables 14.5.1.6.4.1-3 and 14.5.1.6.5-1.
4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.1.6.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than 1242 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
9. Once the connection is released, the SS shallswitch OFF and then ON the UE.
10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.5.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.1.6.4.3-1: Common Exception messages for NR SA FR1 Event-triggered reporting with SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, [SMTC pattern Y], and Asynchronous cells Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ

Table 14.5.1.6.4.3-2: *MeasGapConfig* for NR SA FR1 Event-triggered reporting with SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70 with Condition GAP_ADD			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	2 entries		
GapConfig-r17[1] SEQUENCE {			
measGapId-r17	1	MeasGapId #1	
gapType-r17	perUE		
gapOffset-r17	39		
mgl-r17	ms6		
mgrp-r17	ms40	Gap pattern 0	

mgta-r17	ms0		
}			
GapConfig-r17[2] SEQUENCE {			
measGapId-r17	2	MeasGapId #2	
gapType-r17	perUE		
gapOffset-r17	4		
mgl-r17	ms6		
mgrp-r17	ms80	Gap pattern 1	
mgta-r17	ms0		
}			
}			
}			

14.5.1.6.5 Test requirements

Tables 14.5.1.6.4.1-3 and 14.5.1.6.5-1 define the primary level settings including test tolerances for NR SA FR1 Event-triggered reporting with SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access.

Table 14.5.1.6.5-1: Cell specific test parameters for NR SA FR1 Event-triggered reporting with SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
SMTC configuration		1, 2	SMTC.2		SMTC.Y	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.2 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.59	-62.25	-64.59	-62.25
Propagation Condition		1, 2	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

satellite access

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1240 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.2 Inter-frequency Measurements for SAN

14.5.2.0 Minimum conformance requirements

14.5.2.0.1 Minimum conformance requirements for inter-frequency measurements with measurement gaps

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$.

$$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter}) \text{ ms}$$

$$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter}) \text{ ms}$$

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 14.5.2.0.1-1.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 14.5.2.0.1-2.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 14.5.2.0.1-3.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1D.5.2 for measurement conducted within measurement gaps.

K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. K_{gap} = 1 when the UE is not configured with concurrent measurement gaps. When the UE is configured with concurrent measurement gaps and the two measurement gaps are fully overlapping with MGRP=160ms, K_{gap} = 2. Otherwise, $K_{gap} = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

For a window W of duration max(SMTC period, MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gap, and starting from the beginning of any SMTC occasion:

- N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W, including those overlapped with other measurement gap occasions within the window, and

- $N_{available}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W after accounting for measurement gap collisions by applying the measurement gap collision rule in 38.133 [6] section 9.1.8.3.

K_{gap} is only applicable for UE supporting *parallelMeasurementGap-r17*. When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{available}$ =0, or if one SMTC overlaps more than one MGs associated to the frequency layer.

K_satellite: it is a statellite specific scaling factor.

- If SMTCs within a measurement gap do not overlap with each other, and if LEO satellite(s) is/are required to be measured within SMTC
  - K_satellite = 1, if GSO satellites are measured on the carrier
  - $\text{K_satellite} = \left\lceil \frac{Num\ of\ LEO\ satellites\ to\ be\ measured\ in\ the\ SMTC}{number\ of\ LEO\ satellites\ UE\ is\ capable\ to\ measure\ in\ one\ SMTC} \right\rceil$, if LEO satellites are measured on the carrier.
- If SMTCs within a measurement gap partially overlap with each other, and if LEO and/or GEO satellite(s) is/are required to be measured within overlapped SMTCs
  - $\text{K_satellite} = number\ of\ overlapped\ SMTCs$, if only GEO satellites are measured on the carrier
  - $\text{K_satellite} = \sum_i \left\lceil \frac{Num\ of\ LEO\ satellites\ to\ be\ measured\ in\ the\ SMTC\ i}{number\ of\ LEO\ satellites\ UE\ is\ capable\ to\ measure\ in\ one\ SMTC} \right\rceil$, if only LEO satellites are measured on the carrier.

Table 14.5.2.0.1-1: Time period for PSS/SSS detection (Frequency range FR1)

Condition NOTE1	T_{PSS/SSS_sync_inter}
No DRX	Max(600ms, Ceil(8 x K_{gap}) × Max(MGRP, SMTC period NOTE2)) × $CSSF_{inter}$ × K_satellite
DRX cycle ≤ 320ms	Max(600ms, Ceil(8*1.5 x K_{gap}) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$ × K_satellite
DRX cycle > 320ms	Ceil(8 x K_{gap}) × DRX cycle × $CSSF_{inter}$ × K_satellite
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.	

Table 14.5.2.0.1-2: Time period for time index detection (Frequency range FR1)

Condition NOTE1	$T_{SSB_time_index_inter}$
No DRX	Max(120ms, Ceil(3 x K_{gap}) × Max(MGRP, SMTC period NOTE2)) × $CSSF_{inter}$ × K_satellite
DRX cycle ≤ 320ms	Max(120ms, Ceil(3 × 1.5 x K_{gap}) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$ × K_satellite
DRX cycle > 320ms	Ceil(3 x K_{gap}) × DRX cycle × $CSSF_{inter}$ × K_satellite
NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1 NOTE 2: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.	

When measurement gaps are provided for inter frequency measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in 38.133 [6] clauses 10.1C.4, 10.1C.5, 10.1C.9, 10.1C.10, 10.1C.14 and 10.1C.15, respectively, as shown in table 14.5.2.0.1-3.

Table 14.5.2.0.1-3: Measurement period for inter-frequency measurements with gaps (Frequency FR1)

Condition NOTE1	$T_{SSB_measurement_period_inter}$
No DRX	Max(200ms, Ceil(8 x K_{gap}) × Max(MGRP, SMTC period NOTE2)) × $CSSF_{inter}$ × K_satellite
DRX cycle ≤ 320ms	Max(200ms, Ceil(8 × 1.5 x K_{gap}) × Max(MGRP, SMTC period, DRX cycle)) × $CSSF_{inter}$ × K_satellite
DRX cycle > 320ms	Ceil(8 x K_{gap}) × DRX cycle × $CSSF_{inter}$ × K_satellite

NOTE 1: DRX or non DRX requirements apply according to the conditions described in 38.133 [6] clause 3.6.1
NOTE 2: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.

The normative reference for this requirement is TS 38.133 [6] clause 9.3C.4 and 9.3C.5.

14.5.2.0.2 Minimum conformance requirements for inter-frequency measurements with measurement gaps

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index}$. It is assumed that when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1, the following conditions are met:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned, and
- the timing of SSBs across serving cell and inter-frequency neighbor cells are aligned

$T_{identify_inter_without_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter})$ ms

$T_{identify_inter_with_index} = (T_{PSS/SSS_sync_inter} + T_{SSB_measurement_period_inter} + T_{SSB_time_index_inter})$ ms

Where:

T_{PSS/SSS_sync_inter}: it is the time period used in PSS/SSS detection given in table 14.5.2.0.2-1.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 14.5.2.0.2-2.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 14.5.2.0.2-3.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in 38.133 [6] clause 9.1D.5.1 for measurement conducted outside measurement gaps, i.e. when inter-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps or according to $CSSF_{within_gap,i}$ in 38.133 [6] clause 9.1D.5.2 for measurement conducted within measurement gaps, i.e. when inter-frequency SMTC is fully overlapping with measurement gaps.

K_p is the scaling factor for a SSB frequency layer to be measured without measurement gaps. $K_p = N_{total_SAN} / N_{available_SAN}$, where $N_{available_SAN}$ and N_{total_SAN} are calculated as follows:

- For a window W of duration max(SMTC period, MGRP_max), where
  - If UE supports *parallelMeasurementGap-r17* and is configured with concurrent measurement gaps, MGRP max is the maximum MGRP across all configured per-UE measurement gap. Otherwise, MGRP max is the MGRP of configured measurement gap.
  - Starting from the beginning of any SMTC occasion:
    - N_{total_SAN} is the total number of SMTC occasions within the window, including those overlapped and non-overlapped with measurement gap occasions within the window, and
    - $N_{available_SAN}$ is the number of SMTC occasions within the window W that don't collide with any non-dropped MG occasion within or outside the window W, after accounting for measurement gap collisions by applying the measurement gap collision rule in 38.133 [6] section 9.1C.8.3. The collision rule between SMTC occasion and measurement gap occasion is defined in 38.133 [6] section 9.1C.9.1

K_p = [1] when $N_{available_SAN} = 0$ and measurement gap sharing in 38.133 [6] clause 9.1.2.1a shall apply.

$K_p = 1$ when inter-frequency SMTC is fully non overlapping with measurement gaps.

$K_{satellite}$: it is a satellite specific scaling factor.

- If SMTCs do not overlap with each other, and if LEO and/or GEO satellite(s) is/are required to be measured within SMTC
  - $K_{satellite}$ = 1, if GSO satellite(s) is/are measured on the carrier
  - $K_{satellite} = \left\lceil \frac{Num\ of\ LEO\ satellites\ to\ be\ measured\ in\ the\ SMTC}{number\ of\ LEO\ satellites\ UE\ is\ capable\ to\ measure\ in\ one\ SMTC} \right\rceil$, if LEO satellite(s) is/are measured on the carrier.
- If SMTCs partially overlap with each other, and if LEO and/or GEO satellite(s) is/are required to be measured within overlapped SMTCs
  - $K_{satellite} = number\ of\ overlapped\ SMTCs$, if only GEO satellite(s) is/are measured on the carrier
  - $K_{satellite} = \sum_i \left\lceil \frac{Num\ of\ LEO\ satellites\ to\ be\ measured\ in\ the\ SMTC\ i}{number\ of\ LEO\ satellites\ UE\ is\ capable\ to\ measure\ in\ one\ SMTC} \right\rceil$, if only LEO satellite(s) is/are measured on the carrier.

Table 14.5.2.0.2-1: Time period for PSS/SSS detection, (FR1)

DRX cycle	T_{PSS/SSS_sync_inter}
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter} \times K_{satellite}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter} \times K_{satellite}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter} \times K_{satellite}$
NOTE 1: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.	

Table 14.5.2.0.2-2: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_inter}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{inter} \times K_{satellite}$
DRX cycle≤ 320ms	max(120ms, ceil (1.5 x 3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter} \times K_{satellite}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{inter} \times K_{satellite}$
NOTE 1: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.	

The UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in 38.133 [6] clauses 10.1C.4, 10.1C.5, 10.1C.9, 10.1C.10, 10.1C.14 and 10.1C.15, respectively, as shown in table 14.5.2.0.2-3, if UE supports inter-frequency measurement without measurement gaps:

Table 14.5.2.0.2-3: Measurement period for inter-frequency measurements without gaps ((FR1)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter} \times K_satellite$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter} \times K_satellite$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter} \times K_satellite$
NOTE 1: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in *SSB-MTC4List-r17*.	

The normative reference for this requirement is TS 38.133 [6] clause 9.3C.7.1 and 9.3C.7.2.

14.5.2.1 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Editor's Note:

- Neighbor cell ephemeris needs further analysis

14.5.2.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 14.5.2.0.1.

14.5.2.1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.5.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.2.1.

14.5.2.1.4 Test description

Two cells are deployed in the test, which are NR FR1 PCell (Cell 1) on NR RF channel 1 and NR FR1 neighbour cell (Cell 2) on NR RF channel 2. The test parameters for PCell and neighbour cell are given in Tables 14.5.2.1.4.1-1, 14.5.2.1.4.1-3 and 14.5.2.1.5-1 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. Measurement gap pattern configuration # 0 is provided to the UE.

14.5.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.2.1.4.1-1.

Table 14.5.2.1.4.1-1: Supported test configurations for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Configuration	Description
14.5.2.1-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.2.1-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note 1: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 14.5.2.1.4.1-2.

Table 14.5.2.1.4.1-2: Initial conditions for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.5.2.1.4.1-3.
2. Message contents are defined in clause 14.5.2.1.4.3.

3. Cell 1 and Cell 2 are NR cells (PCell and neighbor cell, respectively) with the power level set according to clauses C.1.2 and C.1.3. Both Cell 1 and Cell 2 are satellite access cells.

4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.2.1.4.1-3: General test parameters for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2	NR Cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR Cell2	NR Cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5	
T2	s	Config 1,2	1	

14.5.2.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The UE is not required to read the neighbour cell SSB index in this test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR*, *Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 14.5.2.1.5-1.

3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an inter-frequency measurement object, event A3, gap configuration, and SMTC configuration according to Tables 14.5.2.1.4.1-3 and 14.5.2.1.5-1.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.2.1.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than 922 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Once the connection is released, the SS shall switch OFF and then ON the UE.

10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.5.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.2.1.4.3-1: Common Exception messages for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Conditions INTER-FREQ MO Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 and gap offset = 9 Table H.3.1-7 with Condition INTER-FREQ Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5

14.5.2.1.5 Test requirements

Tables 14.5.2.1.4.1-3 and 14.5.2.1.5-1 define the primary level settings including test tolerances for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access.

Table 14.5.2.1.5-1: Cell specific test parameters for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Satellite information			Config 1	SSC.1		NSC.1	
			Config 2	SSC.2		NSC.2	
Duplex mode			Config 1,2	FDD			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP configuration	Initial DL BWP	Config 1	Config 1,2	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA	
OCNG Patterns			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD			
RMSI CORESET Reference Channel			Config 1,2	CR.1.1 FDD			
Dedicated CORESET Reference Channel			Config 1,2	CCR.1.1 FDD			
SSB parameters			Config 1,2	SSB.1 FR1		SSB.5 FR1	
SMTC configuration			Config 1,2	SMTC.2		SMTC.5	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			

EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	Config 1,2	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
Propagation Condition		Config 1,2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.2.2 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access

Editor's Note:

- Neighbor cell ephemeris needs further analysis
- Several test parameters are still in brackets

14.5.2.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 14.5.2.0.1.

14.5.2.2.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and long DRX cycle.

14.5.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.2.2.

14.5.2.2.4 Test description

Two cells are deployed in the test, which are NR FR1 PCell (Cell 1) on NR RF channel 1 and NR FR1 neighbour cell (Cell 2) on NR RF channel 2. The test parameters for PCell and neighbour cell are given in Tables 14.5.2.2.4.1-1, 14.5.2.2.4.1-3, 14.5.2.2.5-1, 14.5.2.2.5-2 and 14.5.2.2.5-3 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. Measurement gap pattern configuration # 0 is provided to the UE.

14.5.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.2.2.4.1-1.

Table 14.5.2.2.4.1-1: Supported test configurations for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access

Configuration	Description
14.5.2.2-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.2.2-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note 1: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 14.5.2.2.4.1-2.

Table 14.5.2.2.4.1-2: Initial conditions for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.5.2.2.4.1-3.
2. Message contents are defined in clause 14.5.2.2.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbour cell, respectively) with the power level set according to clauses C.1.2 and C.1.3. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.2.2.4.1-3: General test parameters for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2	1, 2		Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2	NR Cell 1 (PCell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR Cell2		NR Cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0		As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2	9		
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	DRX.1	DRX. 7	As specified in clause A.5
Time offset between serving and neighbour cells		Config 1,2	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5		
T2	s	Config 1,2	[1.1]	[11]	

14.5.2.2.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

The UE is not required to read the neighbour cell SSB index in this test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR, Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 14.5.2.2.5-1.

3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an inter-frequency measurement object, event A3, gap configuration, DRX configuration, and SMTC configuration according to Tables 14.5.2.2.4.1-3 and 14.5.2.2.5-1.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.2.2.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than [1082] ms for Test 1 or less than [10242] ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Once the connection is released, the SS shall switch OFF and then ON the UE.

10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

11. Repeat step 1-10 for each sub-test in Table 14.5.2.2.4.1-3 as appropriate.

14.5.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.2.2.4.3-1: Common Exception messages for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Conditions INTER-FREQ MO Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 and gap offset = 9 Table H.3.1-7 with Condition INTER-FREQ Table H.3.7-1 with Condition DRX.1 and Gap and INTER-FREQ for Test 1 Table H.3.7-1 with Condition DRX.7 and Gap and INTER-FREQ for Test 2 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5

14.5.2.2.5 Test requirements

Tables 14.5.2.2.4.1-3, 14.5.2.2.5-1, 14.5.2.2.5-2 and 14.5.2.2.5-3 define the primary level settings including test tolerances for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access.

Table 14.5.2.2.5-1: Cell specific test parameters for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Satellite information			Config 1	SSC.1		NSC.1	
			Config 2	SSC.2		NSC.2	
Duplex mode			Config 1,2	FDD			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP configuration	Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA	
OCNG Patterns			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD			
RMSI CORESET Reference Channel			Config 1,2	CR.1.1 FDD			
Dedicated CORESET Reference Channel			Config 1,2	CCR.1.1 FDD			
SSB parameters			Config 1,2	SSB.1 FR1		SSB.5 FR1	
SMTC configuration			Config 1,2	SMTC.2		SMTC.5	

PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
Propagation Condition		Config 1,2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 14.5.2.2.5-2: DRX-Configuration for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [13]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	ms640	
shortDRX	disable	disable	

Table 14.5.2.2.5-3: *TimeAlignmentTimer* configuration for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [13]

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [1080] ms from the beginning of time period T2. The UE shall not send event triggered measurement

reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [10240] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.2.3 NR SA FR1-FR1 Event-triggered reporting with SSB time index detection when DRX is not used with single gap for satellite access

Editor's Note:

- Neighbor cell ephemeris needs further analysis
- Several test parameters are still in brackets

14.5.2.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 14.5.2.0.1.

14.5.2.3.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.5.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.2.3.

14.5.2.3.4 Test description

Two cells are deployed in the test, which are NR FR1 PCell (Cell 1) on NR RF channel 1 and NR FR1 neighbour cell (Cell 2) on NR RF channel 2. The test parameters for PCell and neighbour cell are given in Tables 14.5.2.3.4.1-1, 14.5.2.3.4.1-3 and 14.5.2.3.5-1 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. Measurement gap pattern configuration # 0 is provided to the UE.

14.5.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.2.3.4.1-1.

Table 14.5.2.3.4.1-1: Supported test configurations for NR SA FR1-FR1 Event-triggered reporting with SSB time index detection when DRX is not used with single gap for satellite access

Configuration	Description
14.5.2.3-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.2.3-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note 1: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 14.5.2.3.4.1-2.

Table 14.5.2.3.4.1-2: Initial conditions for NR SA FR1-FR1 Event-triggered reporting with SSB time index detection when DRX is not used with single gap for satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.5.2.3.4.1-3.
2. Message contents are defined in clause 14.5.2.3.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbor cell, respectively) with the power level set according to clauses C.1.2 and C.1.3. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.2.3.4.1-3: General test parameters for NR SA FR1-FR1 Event-triggered reporting with SSB time index detection when DRX is not used with single gap for satellite access

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2	NR Cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR Cell2	NR Cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5	
T2	s	Config 1,2	[1.1]	

14.5.2.3.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The UE is required to report the neighbour cell SSB index in this test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR, Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 14.5.2.3.5-1.
3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an inter-frequency measurement object, event A3, gap configuration, and SMTC configuration according to Tables 14.5.2.3.4.1-3 and 14.5.2.3.5-1.
4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.2.3.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than [1042] ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
9. Once the connection is released, the SS shall switch OFF and then ON the UE.
10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.5.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.2.3.4.3-1: Common Exception messages for NR SA FR1-FR1 Event-triggered reporting with SSB time index detection when DRX is not used with single gap for satellite access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Conditions INTER-FREQ MO Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-6 with Conditions gapUE, Pattern #0 and gap offset = 9 Table H.3.1-7 with Condition INTER-FREQ and SSB Index Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5

14.5.2.3.5 Test requirements

Tables 14.5.2.3.4.1-3 and 14.5.2.3.5-1 define the primary level settings including test tolerances for NR SA FR1-FR1 Event-triggered reporting with SSB time index detection when DRX is not used with single gap for satellite access.

Table 14.5.2.3.5-1: Cell specific test parameters for NR SA FR1-FR1 Event-triggered reporting with SSB time index detection when DRX is not used with single gap for satellite access

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Duplex mode			Config 1,2	FDD			
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
BWP configuration	Initial DL BWP	Config 1	Config 1,2	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	

	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA	
OCNG Patterns			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD			
RMSI CORESET Reference Channel			Config 1,2	CR.1.1 FDD			
Dedicated CORESET Reference Channel			Config 1,2	CCR.1.1 FDD			
SSB parameters			Config 1,2	SSB.1 FR1		SSB.5 FR1	
SMTC configuration			Config 1,2	SMTC.2		SMTC.5	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
$\hat{E}_s/I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
Io Note3		dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
Propagation Condition			Config 1,2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [1040] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.2.4 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Editor's Note:

- Several test parameters are still in brackets

14.5.2.4.1 Test purpose

The purpose of this test is to verify that the multiple gaps capable UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 14.5.2.0.1.

14.5.2.4.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and 2 parallel measurement gaps (*parallelMeasurementGap-r17*, TS 38.306).

14.5.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.2.4.

14.5.2.4.4 Test description

Three cells are deployed in the test, which are NR FR1 PCell (Cell 1) on NR RF channel 1, NR FR1 neighbour cell (Cell 2) on NR RF channel 2, and NR FR1 neighbour cell (Cell 3) also on NR RF channel 2. The test parameters for PCell and neighbour cell are given in Tables 14.5.2.4.4.1-1, 14.5.2.4.4.1-3 and 14.5.2.4.5-1 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. Two parallel non-overlapping measurement gap pattern configurations are provided to the UE.

14.5.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.2.4.4.1-1.

Table 14.5.2.4.4.1-1: Supported test configurations for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Configuration	Description
14.5.2.4-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.2.4-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note 1: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 14.5.2.4.4.1-2.

Table 14.5.2.4.4.1-2: Initial conditions for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram	N/A	

1. The general test parameter settings are set up according to Table 14.5.2.4.4.1-3.
2. Message contents are defined in clause 14.5.2.4.4.3.
3. Cell 1, Cell 2 and Cell 3 are NR cells (PCell and two neighbor cells, respectively) with the power level set according to clauses C.1.2 and C.1.3. Both Cell 1, Cell 2 and Cell 3 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.2.4.4.1-3: General test parameters for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2	NR Cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR Cell 2 and NR Cell 3	NR Cell 2 and NR Cell 3 are on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0 for MeasGapId #1 0 for MeasGapId #2	As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2	9 for MeasGapId #1 19 for MeasGapId #2	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cell 2,3		Config 1,2	3ms	Asynchronous cells. The timing of Cell 2 and Cell 3 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5	
T2	s	Config 1,2	[1]	

14.5.2.4.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3.

The UE is not required to read the neighbour cell SSB index in this test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR*, *Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 14.5.2.4.5-1.
3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an inter-frequency measurement object, event A3, two parallel gap configurations, and two SMTC configurations, respectively, according to Tables 14.5.2.4.4.1-3 and 14.5.2.4.5-1.
4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.2.4.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than [922] ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.

9. Once the connection is released, the SS shall switch OFF and then ON the UE and proceed with step 1.

10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.5.2.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.2.4.4.3-1: Common Exception messages for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Conditions INTER-FREQ MO Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5

Table 14.5.2.4.4.3-2: *MeasGapConfig* for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70 with Condition GAP_ADD			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	2 entries		
GapConfig-r17[1] SEQUENCE {			
measGapId-r17	1	MeasGapId #1	
gapType-r17	perUE		
gapOffset-r17	9		
mgl-r17	ms6		
mgrp-r17	ms40	Gap pattern 0	
mgta-r17	ms0		
}			
GapConfig-r17[2] SEQUENCE {			
measGapId-r17	2	MeasGapId #2	
gapType-r17	perUE		
gapOffset-r17	19		
mgl-r17	ms6		
mgrp-r17	ms40	Gap pattern 0	
mgta-r17	ms0		
}			
}			
}			

14.5.2.4.5 Test requirements

Tables 14.5.2.4.4.1-3 and 14.5.2.4.5-1 define the primary level settings including test tolerances for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access.

Table 14.5.2.4.5-1: Cell specific test parameters for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2		2	
Satellite information			Config 1	SSC.1		NSC.1			
			Config 2	SSC.2		NSC.2			
Duplex mode			Config 1,2	FDD					
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
BWP configuration	Initial DL BWP		Config 1,2	DLBWP.0.1		NA		NA	
	Initial UL BWP			ULBWP.0.1		NA		NA	
	Dedicated DL BWP			DLBWP.1.1		NA		NA	
	Dedicated UL BWP			ULBWP.1.1		NA		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA		NA	
OCNG Patterns			Config 1,2	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD					
RMSI CORESET Reference Channel			Config 1,2	CR.1.1 FDD					
Dedicated CORESET Reference Channel			Config 1,2	CCR.1.1 FDD					
SSB parameters			Config 1,2	SSB.1 FR1		SSB.5 FR1		SSB.1 FR1	
SMTC configuration			Config 1,2	SMTC.2		[SMTC.Y]		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15					
EPRE ratio of PSS to SSS			Config 1,2	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2		dBm/15 kHz	Config 1,2	-98		-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98		-98	
SS-RSRP Note 3		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91	-Infinity	-91
$\hat{E}_s/I_{ot}$		dB	Config 1,2	4	4	-Infinity	7	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2	4	4	-Infinity	7	-Infinity	7

Io[Note3]	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26	-70.05	-62.26
Propagation Condition		Config 1,2	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [920] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.2.5 Void

14.5.2.6 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Editor's Note:

- Several test parameters are still in brackets

14.5.2.6.1 Test purpose

The purpose of this test is to verify that the multiple gaps capable UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 14.5.2.0.1.

14.5.2.6.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and 2 parallel measurement gaps (*parallelMeasurementGap-r17*, TS 38.306).

14.5.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.2.6.

14.5.2.6.4 Test description

Three cells are deployed in the test, which are NR FR1 PCell (Cell 1) on NR RF channel 1, NR FR1 neighbour cell (Cell 2) on NR RF channel 2, and NR FR1 neighbour cell (Cell 3) also on NR RF channel 2. The test parameters for PCell and neighbour cell are given in Tables 14.5.2.6.4.1-1, 14.5.2.6.4.1-3 and 14.5.2.6.5-1 below. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. Two parallel partially overlapping measurement gap pattern configurations are provided to the UE. MeasGapId #2 is configured with a higher priority than MeasGapId #1.

14.5.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.2.6.4.1-1.

Table 14.5.2.6.4.1-1: Supported test configurations for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Configuration	Description
14.5.2.6-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.2.6-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note 1: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test equipment and the DUT according to the parameters in Table 14.5.2.6.4.1-2.

Table 14.5.2.6.4.1-2: Initial conditions for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 14.5.2.6.4.1-3.
2. Message contents are defined in clause 14.5.2.6.4.3.
3. Cell 1, Cell 2 and Cell 3 are NR cells (PCell and two neighbor cells, respectively) with the power level set according to clauses C.1.2 and C.1.3. Both Cell 1, Cell 2 and Cell 3 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.2.6.4.1-3: General test parameters for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2	NR Cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR Cell 2 and NR Cell 3	NR Cell 2 and NR Cell 3 are on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0 for MeasGapId #1 1 for MeasGapId #2	As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2	79 for MeasGapId #1 4 for MeasGapId #2	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	

CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cell 1		Config 1,2	3μs	Cell 1 and Cell 2 are synchronous.
Time offset between serving and neighbour cell 2		Config 1,2	5ms	Cell 1 and Cell 3 are asynchronous. The timing of Cell 3 is 5ms later than the timing of Cell 1.
T1	s	Config 1,2	5	
T2	s	Config 1,2	1.5	

14.5.2.6.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3.

The UE is not required to read the neighbour cell SSB index in this test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR*, *Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 14.5.2.6.5-1.
3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an inter-frequency measurement object, event A3, two parallel gap configurations, and two SMTC configurations, respectively, according to Tables 14.5.2.6.4.1-3 and 14.5.2.6.5-1.
4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.2.6.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than 1282 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.
8. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for next iteration of the test procedure loop.
9. Once the connection is released, the SS shall switch OFF and then ON the UE and proceed with step 1.
10. Repeat step 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

14.5.2.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.2.6.4.3-1: Common Exception messages for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Conditions GAP NEEDED and INTER-FREQ Table H.3.1-3 with Conditions INTER-FREQ MO Table H.3.1-4 with A3-offset = -6dB Table H.3.1-5 Table H.3.1-7 with Condition INTER-FREQ Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.5

Table 14.5.2.6.4.3-2: *MeasGapConfig* for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70 with Condition GAP_ADD			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 {	2 entries		
GapConfig-r17[1] SEQUENCE {			
measGapId-r17	1	MeasGapId #1	
gapType-r17	perUE		
gapOffset-r17	79		
mgl-r17	ms6		
mgrp-r17	ms40	Gap pattern 0	
mgta-r17	ms0		
gapPriority-r17	2	Lower priority	
}			
GapConfig-r17[2] SEQUENCE {			
measGapId-r17	2	MeasGapId #2	
gapType-r17	perUE		
gapOffset-r17	4		
mgl-r17	ms6		
mgrp-r17	ms80	Gap pattern1	
mgta-r17	ms0		
gapPriority-r17	1	Higher priority	
}			
}			
}			

14.5.2.6.5 Test requirements

Tables 14.5.2.6.4.1-3 and 14.5.2.6.5-1 define the primary level settings including test tolerances for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access.

Table 14.5.2.6.5-1: Cell specific test parameters for NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access

Parameter		**Unit**	**Test configuration**	**Cell 1**		**Cell 2**		**Cell 3**	
				T1	**T2**	**T1**	**T2**	**T1**	**T2**
NR RF Channel Number			Config 1,2	1		2		2	
Satellite information			Config 1	SSC.1		NSC.1			
			Config 2	SSC.2		NSC.2			
Duplex mode			Config 1,2	FDD					
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52					
BWP configuration	Initial DL BWP		Config 1,2	DLBWP.0.1		NA		NA	
	Initial UL BWP			ULBWP.0.1		NA		NA	
	Dedicated DL BWP			DLBWP.1.1		NA		NA	
	Dedicated UL BWP			ULBWP.1.1		NA		NA	

TRS configuration		Config 1,2	TRS.1.1 FDD		NA		NA	
OCNG Patterns		Config 1,2	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.1.1 FDD					
RMSI CORESET Reference Channel		Config 1,2	CR.1.1 FDD					
Dedicated CORESET Reference Channel		Config 1,2	CCR.1.1 FDD					
SSB parameters		Config 1,2	SSB.1 FR1		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		Config 1,2	SMTC.2		SMTC.2		[SMTC.Y]	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15					
EPRE ratio of PSS to SSS		Config 1,2	0		0		0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15 kHz	Config 1,2	-98		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2	-98		-98		-98	
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91	-Infinity	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	-Infinity	7	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	-Infinity	7	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26	-70.05	-62.26
Propagation Condition		Config 1,2	AWGN		AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.2.7 NR SA FR1-FR1 Event triggered reporting without gap under non-DRX for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete

- Message contents are FFS
- Call setup and test procedure needs to be updated
- Applicability needs to be updated
- Several sections are in brackets
- Several test parameters and configuration are still in brackets
- Neighbor cell ephemeris needs further analysis

14.5.2.7.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in clauses 14.5.2.0.2

14.5.2.7.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.5.2.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.2.7.

14.5.2.7.4 Test description

Supported test configurations are shown in table 14.5.2.7.4.1-1. Two cells are deployed in the test, which are FR1 PCell (Cell 1) on NR RF channel 1 and a FR1 neighbour cell (Cell 2) on NR RF channel 2. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

14.5.2.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.2.7.4.1-1.

Table 14.5.2.7.4.1-1: NR SA FR1-FR1 Event triggered reporting without gap under non-DRX for Satellite Access

Configuration	Description
14.5.2.7-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.2.7-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.5.2.7.4.1-2.

Table 14.5.2.7.4.1-2: Initial conditions for NR SA FR1-FR1 Event triggered reporting without gap under non-DRX for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.2.7.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	[For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part]		[4Rx support is FFS, exceptions may need to be removed]

1. The general test parameter settings are set up according to Table 14.5.2.7.4.1-3.
2. Message contents are defined in clause 14.5.2.7.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbor cell, respectively) with the power level set according to Annex C.1.2 and C.1.3. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.2.7.4.1-3: General test parameters for NR SA FR1-FR1 Event triggered reporting without gap under non-DRX for Satellite Access

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
SMTC1 configuration		1	SMTC.1	Period: 20ms, offset: 0
SMTC2 configuration		2	SMTC.4	Period: 20ms, offset: 10ms
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2		OFF
Time offset between serving and neighbour cells		1, 2	20 ms	Asynchronous cells. The timing of Cell 2 is 20ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

14.5.2.7.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The UE is not required to read the neighbour cell SSB index in this test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR, Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 14.5.2.7.5-1.
3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an inter-frequency measurement object, event A3, with 2 non-overlapping SMTCs for the inter-frequency measurement according to Tables 14.5.2.7.4.1-3 and 14.5.2.7.5-1.
4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.2.7.5-1. T2 starts.
6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than 800 ms, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.
7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Once the connection is released, the SS [shall reset the satellite access channel model and then] switch OFF and then ON the UE and proceed with step 1.

10. Repeat step 2-9 until the confidence level [according to Tables G.2.3-1 in Annex G clause G.2 is achieved].

14.5.2.7.4.3 Message contents

FFS

14.5.2.7.5 Test requirements

Table 14.5.2.7.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 Event triggered reporting without gap under non-DRX for Satellite Access.

Table 14.5.2.7.5-1: Cell specific test parameters for NR SA FR1-FR1 Event triggered reporting without gap under non-DRX for Satellite Access

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		Config 1	SSC.1		NSC.1	
		Config 2	SSC.2		NSC.2	
SSB configuration		Config 1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		Config 1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		Config 1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		Config 1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		Config 1, 2	OP.1		OP.1	
TRS Configuration		Config 1, 2	TRS.1.1 FDD		N/A	
IInitial BWP configuration		Config 1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		Config 1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		Config 1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		Config 1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	Config 1, 2	-98+TT			
N_{oc} Note 2	dBm/15 kHz	Config 1, 2	-98+TT			
$\hat{E}_s/I_{ot}$	dB	Config 1, 2	4+TT	-1.46+TT	-Infinity	-1.46+TT
$\hat{E}_s/N_{oc}$	dB	Config 1, 2	4+TT	4+TT	-Infinity	4+TT
SS-RSRP Note 3	dBm/SCS kHz	Config 1, 2	-94+TT	-94+TT	-Infinity	-94+TT
Io	dBm/9.36 MHz	Config 1, 2	-64.60+TT	-62.25+TT	--64.60+TT	-62.25+TT
Propagation Condition		Config 1, 2	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.2.8 NR SA FR1-FR1 Event triggered reporting without gap under DRX for Satellite Access

Editor's Note:

- MU and TT analysis is incomplete
- Message contents are FFS
- Call setup and test procedure needs to be updated
- Applicability needs to be updated
- Several sections are in brackets
- Several test parameters and configuration are still in brackets

14.5.2.8.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in clauses 14.5.2.0.2

14.5.2.8.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access.

14.5.2.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.2.8.

14.5.2.8.4 Test description

Supported test configurations are shown in table 14.5.2.8.4.1-1. Two cells are deployed in the test, which are FR1 PCell (Cell 1) on NR RF channel 1 and a FR1 neighbour cell (Cell 2) on NR RF channel 2. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

14.5.2.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.2.8.4.1-1.

Table 14.5.2.8.4.1-1: NR SA FR1-FR1 Event triggered reporting without gap under DRX for Satellite Access

Configuration	Description
14.5.2.8-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.2.8-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.5.2.8.4.1-2.

Table 14.5.2.8.4.1-2: Initial conditions for NR SA FR1-FR1 Event triggered reporting without gap under DRX for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.12-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.2.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	[For 4Rx capable UEs without any 2 Rx RF bands use A.3.2.5.2 for DUT part and A.3.1.8.4 for TE Part]		[4Rx support is FFS, exceptions may need to be removed]

1. The general test parameter settings are set up according to Table 14.5.2.8.4.1-3.
2. Message contents are defined in clause 14.5.2.8.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbor cell, respectively) with the power level set according to Annex C.1.2 and C.1.3. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.2.8.4.1-3: General test parameters for NR SA FR1-FR1 Event triggered reporting without gap under DRX for Satellite Access

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	Cell 1		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
NTN reference configuration		1	TBD		For GSO
		2	TBD		For NGSO
RF Channel Number		1, 2	1: Cell 1 and Cell 2		
SMTC configuration		1, 2	SMTC.2		
A3-Offset	dB	1, 2	-4.5		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 2	3 μs		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	5	10	

14.5.2.8.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furhtermore UE is allocated with PUSCH resource at every DRX cycle

The UE is not required to read the neighbour cell SSB index in this test.

2. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters *Connectivity NR, Connected without release On* and *Test Mode On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 14.5.2.8.5-1.

3. SS shall transmit an *RRCReconfiguration* message configuring a *MeasId* consisting in an inter-frequency measurement object, event A3, with 1 SMTC for the inter-frequency measurement according to Table 14.5.2.8.4.1-3.

4. The UE shall transmit *RRCReconfigurationComplete* message. T1 starts.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 14.5.2.8.5-1. T2 starts.

6. UE shall transmit a *MeasurementReport* message triggered by event A3. If the overall delay measured from the beginning of time period T2 is less than X ms for Test 1 or less than Y ms for Test 2, then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one. Where X and Y are

   - X=1280 for test configuration 2 and if UE indicates ‘n1’ for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise X=920.

   - Y=12800 for test configuration 2 and if UE indicates ‘n1’ for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise Y=6400.

7. After the SS receives the *MeasurementReport* message in step 6 or when T2 expires, the SS shall transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources.

8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

9. Once the connection is released, the SS [shall reset the satellite access channel model and then] switch OFF and then ON the UE and proceed with step 1.

10. Repeat step 2-9 until the confidence level [according to Tables G.2.3-1 in Annex G clause G.2 is achieved].

11. Repeat step 1-10 for each sub-test in Table 14.5.2.8.4.1-3 as appropriate.

14.5.2.8.4.3 Message contents

FFS

14.5.2.8.5 Test requirements

Table 14.5.2.8.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 Event triggered reporting without gap under DRX for Satellite Access.

Table 14.5.2.8.5-1: Cell specific test parameters for NR SA FR1-FR1 Event triggered reporting without gap under DRX for Satellite Access

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2

Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
IInitial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98+TT			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98+TT			
$\hat{E}_s/I_{ot}$	dB	1, 2	4+TT	-1.46+TT	-Infinity	-1.46+TT
$\hat{E}_s/N_{oc}$	dB	1, 2	4+TT	4+TT	-Infinity	4+TT
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94+TT	-94+TT	-Infinity	-94+TT
Io	dBm/9.36 MHz	1, 2	-64.60+TT	-62.25+TT	-64.60+TT	-62.25+TT
Propagation Condition		1, 2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. X=1280 for test configuration 2 and if UE indicates 'n1' for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise X=920.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than Y ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. Y=12800 for test configuration 2 and if UE indicates 'n1' for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise Y=6400.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.3 L1-RSRP measurement for beam reporting for SAN

14.5.3.0 Minimum conformance requirements

14.5.3.0.1 Minimum conformance requirements for SSB based L1-RSRP measurement for beam reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$ is defined in Table 14.5.3.0.1-1 for FR1, where

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- P value for SSB resource to be measured is defined as
  - $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
  - $N_{total} / N_{available}$ with $N_{available} > 0$
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any SSB resource occasion:
  - N_{total} is the total number of SSB resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is
    - the number of SSB resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
    - same as $N_{outside_MG}$, otherwise
  - T_{L1} is periodicity of the target SSB.
  - $P_{sharing\ factor} = 3$.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet previous conditions.

Table 14.5.3.0.1-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to 38.133 [6] clause 10.1.19C for FR1 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in TS 38.133 [6] clause 10.1.19C for FR1. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 38.133 [6] clause 10.1.6.

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in TS 38.133 [6] clause 10.1.19C.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

The UE is required to be capable of measuring SSB and CSI-RS for L1-RSRP without measurement gaps. The UE is required to perform the SSB and CSI-RS measurements with measurement restrictions as described in the following clauses.

For FR1, when the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports simultaneousRxDataSSB-DiffNumerology, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
  - If UE does not support simultaneousRxDataSSB-DiffNumerology, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

The normative reference for this requirement is TS 38.133 [6] clauses 9.5C.3.1, 9.5C.4.1 and 9.5C.5.1.

14.5.3.0.2 Minimum conformance requirements for CSI-RS based L1-RSRP measurement for beam reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_SAN}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ is defined in Table 14.5.3.0.2-1 for FR1, where

- For periodic and semi-persistent CSI-RS resources, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- For aperiodic CSI-RS resources M=1
- P value for a CSI-RS resource to be measured is defined as
  - $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
  - $N_{total} / N_{available}$ with $N_{available} > 0$
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any CSI-RS resource occasion:
  - N_{total} is the total number of CSI-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is
    - the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
    - same as $N_{outside_MG}$, otherwise

- T_{L1} is periodicity of the target CSI-RS.
- $P_{sharing\ factor} = 3$.

Note: The overlap between CSI-RS for L1-RSRP measurement and SMTC means that CSI-RS for L1-RSRP measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet previous conditions.

Table 14.5.3.0.2-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_SAN}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_SAN}$ (ms)
non-DRX	$\max(T_{Report}, ceil(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, ceil(1.5*M*P)*\max(T_{DRX},T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$ceil(M*P)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19C for FR1 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19C for FR1. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19C.

The UE shall only send aperiodic L1-RSRP measurement reports, if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for L1-RSRP measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clauses 9.5C.3.3, 9.5C.4.2 and 9.5C.5.2.

14.5.3.1 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for Satellite Access

Editor's note: This test case is incomplete in following aspects:

- MU and TT analysis is incomplete.
- Message contents may need to be updated.
- Call setup and test procedure are FFS
- Test requirements contain parameters in square brackets.

14.5.3.1.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in 14.5.3.0.1.

14.5.3.1.2 Test applicability

This test applies to all types of NR UE from Release 17 and onwards supporting satellite access.

14.5.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.3.1.

14.5.3.1.4 Test description

Supported test configurations are shown in table 14.5.3.1.4.1-1. There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN).

14.5.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.3.1.4.1-1.

Table 14.5.3.1.4.1-1: Supported test configurations for NR SA FR1 SSB based L1-RSRP test for satellite access

Configuration	Description
14.5.3.1-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.3.1-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.5.3.1.4-2.

Table 14.5.3.1.4.1-2: Initial conditions for NR SA FR1 SSB based L1-RSRP test for satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.3.1.4-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.5.3.1.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.5.3.1.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.3.1.4.1-3: General test parameters for NR SA FR1 SSB based L1-RSRP test for satellite access

Parameter	Config	Unit	Value
SSB GSCN	1, 2		freq1
Duplex mode	1, 2		FDD
TDD Configuration	1, 2		N/A
$BW_{channel}$	1, 2	MHz	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD
SSB configuration	1, 2		SSB.3 FR1
OCNG Patterns	1, 2		OP.1
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1, 2		SMTC.1
TRS Configuration	1, 2		TRS.1.1 FDD
DRX configuration	1, 2		Off
reportConfigType	1, 2		periodic
reportQuantity	1, 2		ssb-Index-RSRP
Number of reported RS	1, 2		2
L1-RSRP reporting period	1, 2	slot	80
T1	1, 2	s	5
T2	1, 2	s	1
EPRE ratio of PSS to SSS	1, 2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1, 2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

14.5.3.1.4.2 Test procedure

FFS

14.5.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.3.1.4.3-1: Common Exception messages EN-DC SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with conditions SSB and PERIODIC Table H.3.6-10

Table 14.5.3.1.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

14.5.3.1.5 Test requirement

Table 14.5.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Table 14.5.3.1.5-1: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1, 2	dBm/15kHz	-94.65+TT			
N_{oc} Note2	1, 2	dBm/SSB SCS	-94.65+TT			
$\hat{E}_s / I_{ot}$	1, 2	dB	0	0	-Infinity	3
SSB RSRP Note3	1, 2	dBm/SSB SCS	-94.65+TT	-94.65+TT	-Infinity	-91.65+TT
Io Note3	1, 2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
$\hat{E}_s / N_{oc}$	1, 2	dB	0+TT	0+TT	-Infinity	3+TT

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1. Each L1-RSRP measurement report shall

meet the corresponding absolute accuracy requirements in Table 14.5.3.1.5-2 and the corresponding relative accuracy requirements in Table 14.5.3.1.5-3.

Table 14.5.3.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	[FFS]	[FFS]
Highest reported value (SSB#1)	[FFS]	[FFS]

Table 14.5.3.1.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	[FFS]	[FFS]
Highest DIFF RSRP reported (SSB#0)	[FFS]	[FFS]

For the test to pass, the ratio of successful reported values for each requirement (RX to RY) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.3.2 NR SA FR1 SSB based L1-RSRP measurement when DRX is used for Satellite Access

Editor's note: This test case is incomplete in following aspects:

- MU and TT analysis is incomplete.
- Message contents may need to be updated.
- Call setup and test procedure are FFS
- Test requirements contain parameters in square brackets.

14.5.3.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement in DRX within L1-RSRP measurement requirements in 14.5.3.0.1.

14.5.3.2.2 Test applicability

This test applies to all types of NR UE from Release 17 and onwards supporting satellite access and long DRX cycle.

14.5.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 14.5.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.3.2.

14.5.3.2.4 Test description

Supported test configurations are shown in table 14.5.3.2.4.1-1. There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN).

14.5.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.3.2.4.1-1.

Table 14.5.3.2.4.1-1: Supported test configurations for NR SA FR1 SSB based L1-RSRP test for satellite access

Configuration	Description
14.5.3.2-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.3.2-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.5.3.2.4-2.

Table 14.5.3.2.4.1-2: Initial conditions for NR SA FR1 SSB based L1-RSRP test for satellite access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.3.2.4-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.5.3.2.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.5.3.2.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.3.2.4.1-3: General test parameters for NR SA FR1 SSB based L1-RSRP test for satellite access

Parameter	Config	Unit	Value
SSB GSCN	1, 2		freq1
Duplex mode	1, 2		FDD
TDD Configuration	1, 2		N/A
$BW_{channel}$	1, 2	MHz	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD
SSB configuration	1, 2		SSB.3 FR1
OCNG Patterns	1, 2		OP.1
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1, 2		SMTC.1
TRS Configuration	1, 2		TRS.1.1 FDD
DRX configuration	1, 2		DRX.3
reportConfigType	1, 2		periodic
reportQuantity	1, 2		ssb-Index-RSRP
Number of reported RS	1, 2		2
L1-RSRP reporting period	1, 2	slot	80
T1	1, 2	s	5
T2	1, 2	s	1
EPRE ratio of PSS to SSS	1, 2	dB	0
EPRE ratio of PBCH DMRS to SSS			

EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1, 2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

14.5.3.2.4.2 Test procedure

FFS

14.5.3.2.4.3 Message contents

Same message content as in subclause 14.5.3.2.4.3 with the following exception:

Table 14.5.3.2.4.3-1: Common Exception messages EN-DC SSB based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3

14.5.3.2.5 Test requirement

Table 14.5.3.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 14.5.3.2.5-1: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1, 2	dBm/15kHz	-94.65+TT			
N_{oc} Note2	1, 2	dBm/SSB SCS	-94.65+TT			
$\hat{E}_s / I_{ot}$	1, 2	dB	0	0	-Infinity	3
SSB RSRP Note3	1, 2	dBm/SSB SCS	-94.65+TT	-94.65+TT	-Infinity	-91.65+TT
Io Note3	1, 2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
$\hat{E}_s / N_{oc}$	1, 2	dB	0+TT	0+TT	-Infinity	3+TT
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1. Each L1-RSRP measurement report shall meet the corresponding absolute accuracy requirements in Table 14.5.3.2.5-2 and the corresponding relative accuracy requirements in Table 14.5.3.2.5-3.

Table 14.5.3.2.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2, 4 and 5

Normal Conditions	T1	T2
Lowest reported value (SSB#1)	[FFS]	[FFS]
Highest reported value (SSB#1)	[FFS]	[FFS]

Table 14.5.3.2.5-3: L1-RSRP relative accuracy requirements for the reported values for all test configurations

Normal Conditions	T1	T2
Lowest DIFF RSRP reported (SSB#0)	[FFS]	[FFS]
Highest DIFF RSRP reported (SSB#0)	[FFS]	[FFS]

For the test to pass, the ratio of successful reported values for each requirement (XX to YY) shall be more than 90% with a confidence level of 95%. Each requirement is evaluated independently of the others.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.3.3 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for Satellite Access

Editor's note: This test case is incomplete in following aspects:

- MU and TT analysis is incomplete.
- Message contents may need to be updated.
- Call setup and test procedure are FFS
- Applicability needs to be updated.
- Test requirements contain parameters in square brackets.

14.5.3.3.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement in non-DRX within L1-RSRP measurement requirements in 14.5.3.0.2.

14.5.3.3.2 Test applicability

This test applies to all types of NR UE from Release 17 and onwards supporting satellite access.

14.5.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.3.3.

14.5.3.3.4 Test description

Supported test configurations are shown in table 14.5.3.3.4.1-1. There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN).

14.5.3.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.3.3.4.1-1.

Table 14.5.3.3.4.1-1: Supported test configurations for NR SA FR1 CSI-RS based L1-RSRP test for Satellite Access

Configuration	Description
14.5.3.3-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.3.3-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.5.3.3.4-2.

Table 14.5.3.3.4.1-2: Initial conditions for NR SA FR1 CSI-RS based L1-RSRP test for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.3.3.4-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.5.3.3.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.5.3.3.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.3.3.4.1-3: General test parameters for NR SA FR1 CSI-RS based L1-RSRP test for Satellite Access

Parameter	Config	Unit	Value
SSB GSCN	1, 2		freq1
Duplex mode	1, 2		FDD
TDD Configuration	1, 2		N/A
$BW_{channel}$	1, 2	MHz	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD
SSB configuration	1, 2		SSB.3 FR1
CSI-RS configuration	1, 2		CSI-RS 1.3 FDD
OCNG Patterns	1, 2		OP.1
TRS Configuration	1, 2		TRS.1.1 FDD
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1, 2		SMTC.1
DRX configuration	1, 2		Off
reportConfigType	1, 2		aperiodic
reportQuantity	1, 2		cri-RSRP
Number of reported RS	1, 2		2

qcl-Info	1, 2		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1, 2	slots	8
T1	1, 2	s	5
EPRE ratio of PSS to SSS	1, 2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1, 2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

14.5.3.3.4.2 Test procedure

FFS

14.5.3.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.5.3.3.4.3-1: Common Exception messages EN-DC CSI-RS based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions APERIODIC and CSI-RSRP Table H.3.6-3 with condition CSI-RS TS 38.508-1 [14] Table 7.3.1-21 with condition APERIODIC

Table 14.5.3.3.4.3-2: RadioLinkMonitoringConfig

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

14.5.3.3.5 Test requirement

Table 14.5.3.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 14.5.3.3.5-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1, 2	dBm/15kHz	-94.65+TT	
N_{oc} Note1	1, 2	dBm/SSB SCS	-94.65+TT	
$\hat{E}_s/I_{ot}$	1, 2	dB	0	3
CSI-RS RSRP Note2	1, 2	dBm/SSB SCS	-94.65+TT	-91.65+TT
Io Note2	1, 2	dBm/9.36 MHz	-63.69+TT	-61.93+TT
$\hat{E}_s/N_{oc}$	1, 2	dB	0+TT	3+TT
Note 1:				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in TS 38.133 [6] clause 10.1.19C.2.1 and relative accuracy requirement in TS 38.133 [6] clause 10.1.19C.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.5.3.4 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for Satellite Access

Editor's note: This test case is incomplete in following aspects:

- MU and TT analysis is incomplete.
- Message contents may need to be updated.
- Call setup and test procedure are FFS
- Applicability needs to be updated.
- Test requirements contain parameters in square brackets.

14.5.3.4.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement in DRX within L1-RSRP measurement requirements in 14.5.3.0.2.

14.5.3.4.2 Test applicability

This test applies to all types of NR UE from Release 17 and onwards supporting satellite and long DRX cycle.

14.5.3.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 14.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.5.3.4.

14.5.3.4.4 Test description

Supported test configurations are shown in table 14.5.3.4.4.1-1. There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN).

14.5.3.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.5.3.4.4.1-1.

Table 14.5.3.4.4.1-1: Supported test configurations for NR SA FR1 CSI-RS based L1-RSRP test for Satellite Access

Configuration	Description
14.5.3.4-1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
14.5.3.4-2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.5.3.4.4-2.

Table 14.5.3.4.4.1-2: Initial conditions for NR SA FR1 CSI-RS based L1-RSRP test for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.5.3.4.4-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 14.5.3.4.4.3.
2. The power levels and settings for Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 1 is a satellite access cell.
3. The test parameters are given in Table 14.5.3.4.4.1-3.
4. The initial test environment conditions are setup according to section 14.0.5.

Table 14.5.3.4.4.1-3: General test parameters for NR SA FR1 CSI-RS based L1-RSRP test for Satellite Access

Parameter	Config	Unit	Value
SSB GSCN	1, 2		freq1
Duplex mode	1, 2		FDD
TDD Configuration	1, 2		N/A
$BW_{channel}$	1, 2	MHz	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD
SSB configuration	1, 2		SSB.3 FR1
CSI-RS configuration	1, 2		CSI-RS 1.3 FDD
OCNG Patterns	1, 2		OP.1
TRS Configuration	1, 2		TRS.1.1 FDD
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1

SMTC configuration	1, 2		SMTC.1
DRX configuration	1, 2		DRX.3
reportConfigType	1, 2		aperiodic
reportQuantity	1, 2		cri-RSRP
Number of reported RS	1, 2		2
qcl-Info	1, 2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1, 2	slots	8
T1	1, 2	s	5
EPRE ratio of PSS to SSS	1, 2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1, 2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

14.5.3.4.4.2 Test procedure

FFS

14.5.3.4.4.3 Message contents

Same message content as in subclause 14.5.3.3.4.3 with the following exception:

Table 14.5.3.4.4.3-1: Common Exception messages EN-DC CSI-RS based L1-RSRP measurement

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.7-1 with condition DRX.3

14.5.3.4.5 Test requirement

Table 14.5.3.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 14.5.3.4.5-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1	1, 2	dBm/15kHz	-94.65+TT	
N_{oc} Note1	1, 2	dBm/SSB SCS	-94.65+TT	
$\hat{E}_s / I_{ot}$	1, 2	dB	0+TT	3+TT
CSI-RS RSRP Note2	1, 2	dBm/SSB SCS	-94.65+TT	-91.65+TT
Io Note2	1, 2	dBm/9.36 MHz	-63.69+TT	-61.93+TT
$\hat{E}_s / N_{oc}$	1, 2	dB	0+TT	3+TT
Note 1:				

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause TS 38.133 [6] 10.1.19C.2.1 and relative accuracy requirement in TS 38.133 [6] clause 10.1.19C.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

14.6 Measurement Performance Requirements

14.6.1 SS-RSRP for SAN

14.6.1.0 Minimum conformance requirements

14.6.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements for FR1 SAN

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 14.6.1.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 14.6.1.0.1-1: SS-RSRP Intra frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 1 range				
			NR operating band groups Note 2	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[4.5]	±[9]	≥-6	NR_FDD_SAB_FR1_A	-121	-118	N/A	-70
±[8]	±[11]	≥-6	NR_FDD_SAB_FR1_A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3A.4.1A							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.2C.1.1.

14.6.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements for FR1 SAN

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell in FR1.

The accuracy requirements in Table 14.6.1.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 14.6.1.0.2-1: SS-RSRP Intra frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 2	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[2]	±[3]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[3]	±[3]	≥-6	Note 3	Note 3	Note 3	N/A	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB $\hat{E}_s/I_{ot}$ is the minimum SSB $\hat{E}_s/I_{ot}$ of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3A.4.1A.

The normative reference for this requirement is TS 38.133 [6] clause 10.1.2C.1.2.

14.6.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements for FR1 SAN

The requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 14.6.1.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 14.6.1.0.3-1: SS-RSRP Inter frequency Absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 2	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		

±[4.5]	±[9]	≥-6	NR_FDD_SAB_FR1_A	-121	-118	N/A	-70
±[8]	±[11]	≥-6	NR_FDD_SAB_FR1_A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: Void NOTE 3: NR operating band groups in FR1 are as defined in clause 3A.4.1A.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.4C.1.1.

14.6.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements for FR1 SAN

The relative accuracy of SS-RSRP in inter frequency case is defined as the RSRP measured from one cell on a frequency in FR1compared to the RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 14.6.1.0.4-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB
- Valid information for the SAN serving the target cell has been provided.

Table 14.6.1.0.4-1: SS-RSRP Inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[4.5]	±[6]	≥-6	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: NR operating band groups in FR1 are as defined in clause 3A.4.1A.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.4C.1.2.

14.6.1.1 NR SA FR1 SS-RSRP measurement accuracy for Satellite Access

Editor's note: This test case is incomplete in following aspects:

- MU and TT analysis is incomplete.
- Message contents may need to be updated.
- Call setup and test procedure may need to be updated.
- Test requirements contain parameters in square brackets.

14.6.1.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

14.6.1.1.2 Test applicability

This test applies to all types of NR UE from Release 17 and onwards supporting satellite access.

14.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 14.6.1.0.1 and 14.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.6.1.1.

14.6.1.1.4 Test description

Supported test configurations are shown in table 14.6.1.1.4.1-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in 14.6.1.1.5-1. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell

14.6.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.6.1.1.4.1-1.

Table 14.6.1.1.4.1-1: Supported test configurations for NR SA FR1 SS-RSRP measurement accuracy for Satellite Access

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.6.1.1.4.1-2.

Table 14.6.1.1.4.1-2: Initial conditions for NR SA FR1 SS-RSRP measurement accuracy for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table [E.12-1] and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A. [4Rx support is FFS, diagram may need to be removed]
	[TE Part 4Rx]	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	[DUT Part 4Rx]	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

1. The general test parameter settings are set up according to Table 14.6.1.1.5-1

2. Message contents are defined in clause 14.6.1.1.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour in the same frequency and the target cell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.

4. The initial test environment conditions are setup according to section 14.0.5.

14.6.1.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 14.6.1.1.5-1 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1 configuring the UE to perform intra-frequency measurements as specified in section 14.6.1.1.4.3.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport. The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP. If the value is outside the limits in Tables 14.6.1.1.5-2 and 14.6.1.1.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 14.6.1.1.5-1 as appropriate and repeat steps 5-7.

14.6.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.6.1.1.4.3-1: Common Exception messages for NR SA FR1 SS-RSRP measurement accuracy for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition SSB.1 FR1 Table H.3.1-5 Table H.3.1-7 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2

Table 14.6.1.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for NR SA FR1 SS-RSRP measurement accuracy for Satellite Access

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

14.6.1.1.5 Test requirement

Table 14.6.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 14.6.1.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 14.6.1.1.5-2 and the relative accuracy requirements in Table 14.6.1.1.5-3, correspondingly.

Table 14.6.1.1.5-1: Cell specific test parameters for NR SA FR1 SS-RSRP measurement accuracy for Satellite Access

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID				489	0	489	0	489	0
SSB ARFCN				freq1		freq1		freq1	
$BW_{channel}$	Config 1,2		MHz	10: $N_{RB,c}$ = 52					
BWP BW	Config 1,2			10: $N_{RB,c}$ = 52					
Downlink initial BWP configuration				DLBWP.0.1					
Downlink dedicated BWP configuration				DLBWP.1.1					
Uplink initial BWP configuration				ULBWP.0.1					
Uplink dedicated BWP configuration				ULBWP.1.1					
TRS configuration	Config 1,2			TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
DRX Cycle	Config 1,2		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,2			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1,2			CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
Control channel RMC	Config 1,2			CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
SSB configuration	Config 1,2			SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
Time offset with Cell 1	Config 1,2		ms	-	3	-	3	-	3
SMTC configuration	Config 1,2			SMTC.2					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	15 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A	dBm/15Khz	-106+TT		-88+TT		-114+TT	
N_{oc} Note2	Config 1,2		dBm/SCS	-106+TT		-88+TT		Same as Noc/15kHz	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6+TT	1+TT	6+TT	1+TT	3+TT	0+TT
SS-RSRP Note3	Config 1,2	NR_FDD_FR1_A	dBm/SCS	-100+TT	-105+TT	-82+TT	-87+TT	-111.00+TT	-114.00+TT
Io Note3	Config 1,2	NR_FDD_FR1_A	dBm/9.36MHz	-70.09		-52.09		-80.03	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 14.6.1.1.5-2: SS-RSRP Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2
	All bands	[All bands]
Normal Conditions		
Lowest reported value (Cell 2)	FFS	FFS
Highest reported value (Cell 2)	FFS	FFS
Extreme Conditions		
Lowest reported value (Cell 2)	FFS	FFS
Highest reported value (Cell 2)	FFS	FFS

Table 11.6.1.1.5-3: SS-RSRP Intra frequency relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	[All bands]
Normal Conditions		
Lowest reported value (Cell 2)	SS-RSRP_x - FFS	SS-RSRP_x - FFS
Highest reported value (Cell 2)	SS-RSRP_x + FFS	SS-RSRP_x + FFS
Extreme Conditions		
Lowest reported value (Cell 2)	SS-RSRP_x - FFS	SS-RSRP_x - FFS
Highest reported value (Cell 2)	SS-RSRP_x + FFS	SS-RSRP_x + FFS

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

14.6.1.2 NR SA FR1-FR1 SS-RSRP measurement accuracy for Satellite Access

Editor's note: This test case is incomplete in following aspects:

- MU and TT analysis is incomplete.
- Message contents may need to be updated.
- Call setup and test procedure may need to be updated.
- Test requirements contain parameters in square brackets.

14.6.1.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

14.6.1.2.2 Test applicability

This test applies to all types of NR UE from Release 17 and onwards supporting satellite access.

14.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 14.6.1.0.3 and 14.6.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.14.6.1.2.

14.6.1.2.4 Test description

Supported test configurations are shown in table 14.6.1.2.4.1-1. Both absolute and relative accuracy of SS-RSRP inter-frequency measurements are tested by using the parameters in 14.6.1.2.5-1. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell

14.6.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.6.1.2.4.1-1.

Table 14.6.1.2.4.1-1: Supported test configurations for NR SA FR1-FR1 SS-RSRP measurement accuracy for Satellite Access

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 14.6.1.2.4.1-2.

Table 14.6.1.2.4.1-2: Initial conditions for NR SA FR1-FR1 SS-RSRP measurement accuracy for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table [E.12-1] and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A. [4Rx support is FFS, diagram may need to be removed]
	[TE Part 4Rx]	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	[DUT Part 4Rx]	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

1. The general test parameter settings are set up according to Table 14.6.1.2.5-1

2. Message contents are defined in clause 14.6.1.2.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour, on a different frequency than the PCell, and the target cell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.

4. The initial test environment conditions are setup according to section 14.0.5.

14.6.1.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 14.6.1.2.5-1 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1 configuring the UE to perform inter-frequency measurements as specified in section 14.6.1.2.4.3.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRP reported values in the periodic MeasurementReport. The SS-RSRP value of Cell 2 reported by the UE is compared to the expected SS-RSRP. If the value is outside

the limits in Tables 14.6.1.2.5-2 and 14.6.1.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 14.6.1.2.5-1 as appropriate and repeat steps 5-7.

14.6.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.6.1.2.4.3-1: Common Exception messages for NR SA FR1-FR1 SS-RSRP measurement accuracy for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition SSB.1 FR1 Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.1-6 with condition Pattern #0 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2

Table 14.6.1.2.4.3-2: ReportConfigNR-DEFAULT(Periodical) for NR SA FR1-FR1 SS-RSRP measurement accuracy for Satellite Access

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

14.6.1.2.5 Test requirement

Table 14.6.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 14.6.1.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 14.6.1.2.5-2 and the relative accuracy requirements in Table 14.6.1.2.5-3, correspondingly.

Table 14.6.1.2.5-1: Cell specific test parameters for NR SA FR1-FR1 SS-RSRP measurement accuracy for Satellite Access

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1, 2		freq1	freq2	freq1	freq2
$BW_{channel}$	1, 2	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD	-	CR.1.1 FDD	-

Dedicated CORESET Reference Channel		1, 2		CCR.1.1 FDD	-	CCR.1.1 FDD	-
SSB configuration		1, 2		SSB.1 FR1		SSB.1 FR1	
OCNG Patterns		1, 2		OP.1		OP.1	
TRS configuration		1, 2		TRS.1.1 FDD	-	TRS.1.1 FDD	
Initial BWP Configuration		1, 2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration		1, 2		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1		1, 2	ms	-	3	-	3
SMTC configuration		1, 2		SMTC.2		SMTC.2	
EPRE ratio of PSS to SSS		1, 2	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS Note 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
N_{oc} Note2	NR_FDD_FR1_A	1,2	dBm/15 kHz	-94.65+TT		(N_{oc} for Channel 2 +8dB)	-115+TT
N_{oc} Note2	NR_FDD_FR1_A	1,2	dBm/SSB SCS	-94.65+TT		(N_{oc} for Channel 2 +8dB)	-115+TT
$\hat{E}_s / I_{ot}$		1,2	dB	10	10	13	-3
SS-RSRP Note3	NR_FDD_FR1_A	1,2	dBm/SCS	-84.65+TT		(RSRP for Cell 2 +25dB)	-118.00+TT
Io Note3	NR_FDD_FR1_A	1,2	dBm/9.36MHz	-56.28		(Io for Channel 2 +19.75dB)	-85.28
$\hat{E}_s / N_{oc}$		1,2	dB	10+TT	10+TT	13+TT	-3+TT
Propagation condition		1,2	-	AWGN		AWGN	
Antenna configuration		1,2		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 14.6.1.2.5-2: SS-RSRP Inter frequency absolute accuracy requirements for the reported values

	Test 1	Test 2
	All bands	[All bands]
Normal Conditions		
Lowest reported value (Cell 2)	FFS	FFS
Highest reported value (Cell 2)	FFS	FFS

Extreme Conditions		
Lowest reported value (Cell 2)	FFS	FFS
Highest reported value (Cell 2)	FFS	FFS

Table 11.6.1.1.5-3: SS-RSRP Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	[All bands]
Normal Conditions		
Lowest reported value (Cell 2)	SS-RSRP_x - FFS	SS-RSRP_x - FFS
Highest reported value (Cell 2)	SS-RSRP_x + FFS	SS-RSRP_x + FFS
Extreme Conditions		
Lowest reported value (Cell 2)	SS-RSRP_x - FFS	SS-RSRP_x - FFS
Highest reported value (Cell 2)	SS-RSRP_x + FFS	SS-RSRP_x + FFS

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

14.6.2 SS-RSRQ for SAN

14.6.2.0 Minimum conformance requirements

14.6.2.0.1 Intra-frequency absolute SS-RSRQ measurement accuracy requirements for FR1 SAN

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 14.6.2.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 14.6.2.0.1-1: SS-RSRQ Intra frequency absolute accuracy in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB $\hat{E}s/Iot$**	**Io [Note 1] range**				
			NR operating band groups [Note 3]	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±[2.5]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[3.5]	±[4]	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.7C.1.1.

14.6.2.0.2 Inter-frequency absolute SS-RSRQ measurement accuracy requirements for FR1 SAN

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 14.6.2.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 14.6.2.0.2-1: SS-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$	Io [Note 1] range				
			NR operating band groups [Note 3]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[2.5]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[3.5]	±[4]	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.9C.1.1.

14.6.2.0.3 Inter-frequency relative SS-RSRQ measurement accuracy requirements for FR1 SAN

The relative accuracy of SS-RSRQ in inter frequency case is defined as the RSRQ measured from one cell on a frequency in FR1 compared to the RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 14.6.2.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB
- Valid information for the SAN serving the target cell has been provided.

Table 14.6.2.0.3-1: SS-RSRQ Inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ [Note 2]	Io [Note 1] range				
			NR operating band groups [Note 4]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		

±[3]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[4]	±[4]	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

The normative reference for this requirement is TS 38.133 [6] clause 10.1.9C.1.2.

14.6.2.1 NR SA FR1 SS-RSRQ measurement accuracy for Satellite Access

Editor's note: This test case is incomplete in following aspects:

- MU and TT analysis is incomplete.
- Message contents may need to be updated.
- Call setup and test procedure may need to be updated.
- Test requirements contain parameters in square brackets.

14.6.2.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRQ absolute measurement accuracy is within the specified limits for all bands.

14.6.2.1.2 Test applicability

This test applies to all types of NR UE from Release 17 and onwards supporting satellite access.

14.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.6.2.1.

14.6.2.1.4 Test description

Supported test configurations are shown in table 14.6.2.1.4.1-1. The absolute accuracy of SS-RSRQ intra-frequency is tested by using the parameters in 14.6.2.1.5-1. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell

14.6.2.1.4.1 Initial conditions

Table 14.6.2.1.4.1-1: Supported test configurations for NR SA FR1 SS-RSRQ measurement accuracy for Satellite Access

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Configure the test equipment and the DUT according to the parameters in Table 14.6.2.1.4.1-2.

Table 14.6.2.1.4.1-2: Initial conditions for NR SA FR1 SS-RSRQ measurement accuracy for Satellite Access

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table [E.12-1] and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 14.6.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A. [4Rx support is FFS, diagram may need to be removed]
	[TE Part 4Rx]	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	[DUT Part 4Rx]	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

1. The general test parameter settings are set up according to Table 14.6.2.1.5-1

2. Message contents are defined in clause 14.6.2.1.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour in the same frequency and the target cell for SS-RSRQ measurements. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.

4. The initial test environment conditions are setup according to section 14.0.5.

14.6.2.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 14.6.2.1.5-1 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1 configuring the UE to perform intra-frequency measurements as specified in section 14.6.2.1.4.3.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport. The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Table 14.6.2.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 14.6.2.1.5-1 as appropriate and repeat steps 5-7.

14.6.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.6.2.1.4.3-1: Common Exception messages for NR SA FR1 SS-RSRQ measurement accuracy for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition SSB.1 FR1 Table H.3.1-5 Table H.3.1-7 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2

Table 14.6.2.1.4.3-2: ReportConfigNR-DEFAULT(Periodical) for NR SA FR1 SS-RSRQ measurement accuracy for Satellite Access

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

14.6.2.1.5 Test requirement

Table 14.6.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 14.6.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 14.6.2.1.5-2.

Table 14.6.2.1.5-1: Cell specific test parameters for NR SA FR1 SS-RSRQ measurement accuracy for Satellite Access

Parameter		**Unit**	**Test 1**		**Test 2**		**Test 3**	
			Cell 1	**Cell 2**	**Cell 1**	**Cell 2**	**Cell 1**	**Cell 2**
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,2		FDD					
$BW_{channel}$	Config 1,2	MHz	10: $N_{RB,c}$ = 52					
Gap Pattern ID			0					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,2		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
Control Channel RMC	Config 1,2		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
TRS Configuration	Config 1,2		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
OCNG Patterns			OP. 1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1,2	ms	-	3	-	3	-	3
SMTC configuration	Config 1,2		SMTC.2					
SSB configuration	Config 1,2		SSB.1 FR1					
CSI-RS for tracking	Config 1,2		TRS.1.1 FDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								

EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_SAB_FR1_A	dBm/15kHz	-85+TT		-101+TT		-114+TT	
N_{oc} Note2	Config 1,2	NR_FDD_SAB_FR1_A	dBm/SCS	-85+TT		-101+TT		-114+TT	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5..46	-5.46
$\hat{E}_s/N_{oc}$			dB	3+TT	3+TT	-2.9+TT	-2.9+TT	-4+TT	-4+TT
SS-RSRP Note 3	Config 1,2	NR_FDD_SAB_FR1_A	dBm/SCS	-82+TT	-82+TT	-103.9+TT	-103.9+TT	-118+TT	-118+TT
SS-RSRQ Note3		NR_FDD_SAB_FR1_A	dB	TBD	-14.84+TT	-14.84+TT	-16.76+TT	-16.76+TT	-17.34+TT
Io Note3	Config 1,2	NR_FDD_SAB_FR1_A	dBm/9.36MHz	-50		-70		-83.5	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3A.4.1A.

Table 14.6.2.1.5-2: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2
	All bands	[All bands]
Normal Conditions		
Lowest reported value (Cell 2)	FFS	FFS
Highest reported value (Cell 2)	FFS	FFS
Extreme Conditions		
Lowest reported value (Cell 2)	FFS	FFS
Highest reported value (Cell 2)	FFS	FFS

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

14.6.2.2 NR SA FR1-FR1 SS-RSRQ measurement accuracy for Satellite Access

Editor's note: This test case is incomplete in following aspects:

- MU and TT analysis is incomplete.
- Message contents may need to be updated.
- Call setup and test procedure may need to be updated.
- Test requirements contain parameters in square brackets.

14.6.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRQ absolute measurement accuracy is within the specified limits for all bands.

14.6.2.2.2 Test applicability

This test applies to all types of NR UE from Release 17 and onwards supporting satellite access.

14.6.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clauses 14.6.2.0.2 and 14.6.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.14.6.2.2.

14.6.2.2.4 Test description

Supported test configurations are shown in table 14.6.2.2.4.1-1. Both absolute and relative accuracy of SS-RSRQ inter-frequency measurements are tested by using the parameters in 14.6.2.2.5-1. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell

14.6.2.2.4.1 Initial conditions

Table 14.6.2.2.4.1-1: Supported test configurations for NR SA FR1-FR1 SS-RSRQ measurement accuracy for Satellite Access

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Configure the test equipment and the DUT according to the parameters in Table 14.6.2.2.4.1-2.

Table 14.6.2.2.4.1-2: Initial conditions for NR SA FR1-FR1 SS-RSRQ measurement accuracy for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table [E.12-1] and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.6.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A. [4Rx support is FFS, diagram may need to be removed]
	[TE Part 4Rx]	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	[DUT Part 4Rx]	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

1. The general test parameter settings are set up according to Table 14.6.2.2.5-1

2. Message contents are defined in clause 14.6.2.2.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour, on a different frequency than the PCell, and the target cell for SS-RSRQ measurements. The connection setup is done according to the settings in Annex C.1.2 and C.1.3.

4. The initial test environment conditions are setup according to section 14.0.5.

14.6.2.2.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 14.6.2.2.5-1 as appropriate.

3. The SS shall transmit an RRCReconfiguration message on Cell 1 configuring the UE to perform inter-frequency measurements as specified in section 14.6.2.2.4.3.

4. The UE shall transmit an RRCReconfigurationComplete message.

5. The UE shall transmit periodically MeasurementReport messages.

6. After 10s wait from Step 3, the SS shall check the SS-RSRQ reported values in the periodic MeasurementReport. The SS-RSRQ value of Cell 2 reported by the UE is compared to the expected SS-RSRQ. If the value is outside the limits in Tables 14.6.2.2.5-2 and 14.6.2.2.5-3 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.

7. The SS shall continue checking the MeasurementReport messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.

8. Set the parameters according to each sub-test in Table 14.6.2.2.5-1 as appropriate and repeat steps 5-7.

14.6.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.6.2.2.4.3-1: Common Exception messages for NR SA FR1-FR1 SS-RSRQ measurement accuracy for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition SSB.1 FR1 Table H.3.1-5 Table H.3.1-7 with condition INTER-FREQ Table H.3.1-6 with condition Pattern #0 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2

Table 14.6.2.2.4.3-2: ReportConfigNR-DEFAULT(Periodical) for NR SA FR1-FR1 SS-RSRQ measurement accuracy for Satellite Access

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrq	false		
sinr	false		
}			
maxReportCells	2		
}			
}			
}			

14.6.2.2.5 Test requirement

Table 14.6.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRQ measurement report for each of the tests in Table 14.6.2.2.5-1 shall meet the corresponding absolute accuracy requirements in Table 14.6.2.2.5-2 and the relative accuracy requirements in Table 14.6.2.2.5-3, correspondingly.

Table 14.6.2.2.5-1: Cell specific test parameters for NR SA FR1-FR1 SS-RSRQ measurement accuracy for Satellite Access

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN				freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,2			FDD					
$BW_{channel}$	Config 1,2		MHz	10: $N_{RB,c}$ = 52					
Gap pattern ID	Config 1,2			0					
BWP BW	Config 1,2			10: $N_{RB,c}$ = 52					
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,2			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1,2			CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2			CCR.1 .1 FDD	-	CCR.1. 1 FDD	-	CCR.1. 1 FDD	-
TRS Configuration	Config 1,2			TRS.1. 1 FDD	-	TRS.1.1 FDD	-	TRS.1. 1 FDD	-
OCNG Patterns				OCNG pattern 1					
Time offset with Cell 1	Config 1,2		ms	-	3	-	3	-	3
SMTC configuration	Config 1,2			SMTC pattern 2					
SSB configuration	Config 1,2			SSB pattern 1 in FR1					
CSI-RS for tracking	Config 1,2			TRS.1.1 FDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	15 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_SAB_FR1_A	dBm/15kHz	-80.18+TT		-106+TT		-116+TT	
N_{oc} Note2	Config 1,2	NR_FDD_SAB_FR1_A	dBm/15kHz	-80.18+TT		-106+TT		-116+TT	
$\hat{E}_s / I_{ot}$			dB	-1.75		-1.75		3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75+TT		-1.75+TT		3+TT	-1.75+TT
SS-RSRP Note3	Config 1,2	NR_FDD_SAB_FR1_A	dBm/SCS	-81.93 +TT	-81.93+ TT	-107.75 +TT	-107.75 +TT	-113+T T	-117.7 5+TT
SS-RSRQ Note3		NR_FDD_SAB_FR1_A	dB	-14.77 +TT	-14.77+ TT	-14.76+ TT	-14.76+ TT	-12.56+ TT	-14.76 +TT
Io Note3	Config 1,2	NR_FDD_SAB_FR1_A	dBm/9.36MHz	-50		-75.83		-83.28	-85.83
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in clause 3A.4.1A.

Table 14.6.2.2.5-2: SS-RSRQ Inter frequency absolute accuracy requirements for the reported values

	Test 1	Test 2
	All bands	[All bands]
Normal Conditions		
Lowest reported value (Cell 2)	FFS	FFS
Highest reported value (Cell 2)	FFS	FFS
Extreme Conditions		
Lowest reported value (Cell 2)	FFS	FFS
Highest reported value (Cell 2)	FFS	FFS

Table 11.6.1.1.5-3: SS-RSRQ Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	[All bands]
Normal Conditions		
Lowest reported value (Cell 2)	SS-RSRQ_x - FFS	SS-RSRQ_x - FFS
Highest reported value (Cell 2)	SS-RSRQ_x + FFS	SS-RSRQ_x + FFS
Extreme Conditions		
Lowest reported value (Cell 2)	SS-RSRQ_x - FFS	SS-RSRQ_x - FFS
Highest reported value (Cell 2)	SS-RSRQ_x + FFS	SS-RSRQ_x + FFS

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

14.6.3 SS-SINR Requirements for SAN

14.6.3.0 Minimum conformance requirements

14.6.3.0.1 Intra-Frequency SS-SINR accuracy requirements in FR1

14.6.3.0.1.1 Absolute SS-SINR accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 14.6.3.0.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.2 for a corresponding Band.
- Valid information for the SAN serving the target cell has been provided.

Table 14.6.3.0.1.1-1: SS-SINR Intra frequency absolute accuracy in FR1

Accuracy		Conditions				
Normal condition	Extreme condition	SSB Ês/Iot Note 3	Io Note 1 range			
			NR operating band groups Note 4	Minimum Io		Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		

±[3]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[3.5]	±[4]	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB under non-HST scenarios. NOTE 4: NR operating band groups for satellite access in FR1 are as defined in clause 3A.4.1A. NOTE 5: The requirements apply for SSB Ês/Iot ≤5 dB with SCS 15kHz or 30kHz under NR high speed scenarios.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.12C.1.1.

14.6.3.0.2 Inter-Frequency SS-SINR accuracy requirements in FR1

14.6.3.0.2.1 Absolute SS-SINR accuracy

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 14.6.3.0.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.3 for a corresponding Band.
- Valid information for the SAN serving the target cell has been provided.

Table 14.6.3.0.2.1-1: SS-SINR Inter frequency absolute accuracy in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 3	**Io** Note 1 **range**				
			NR operating band groups Note 4	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±[3]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[3.5]	±[4]	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB. NOTE 4: NR operating band groups in FR1 are as defined in clause 3A.4.1A.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.14C.1.1.

14.6.3.0.2.2 Relative SS-SINR accuracy

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency in FR1 compared to the SS-SINR measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 14.6.3.0.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to 38.133 [6] Annex B.2.3 for a corresponding Band.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- | Channel 1_Io -Channel 2_Io | ≤ 20 dB

- Valid information for the SAN serving the target cell has been provided.

Table 14.6.3.0.2.2-1: SS-SINR Inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2,4	Io Note 1 range				
			NR operating band groups Note 5	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 120 kHz	SCS_{SSB} = 240 kHz		
±[3.5]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[4]	±[4]	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: The requirements apply for SSB Ês/Iot ≤ [25] dB.
NOTE 5: NR operating band groups in FR1 are as defined in clause 3A.4.1A.

The normative reference for this requirement is TS 38.133 [6] clause 10.1.14C.1.2.

14.6.3.1 NR SA FR1 SS-SINR Measurement Accuracy for Satellite Access

Editor's Note:

- Undefined Satellite band groups need to be removed in 38.133

14.6.3.1.1 Test purpose

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 14.6.3.0.1.

14.6.3.1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and SS-SINR measurements in FR1.

14.6.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.6.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.6.3.1.

14.6.3.1.4 Test description

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table 14.6.3.1.4.1-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table 14.6.3.1.5-1. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

14.6.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.6.3.1.4.1-1.

Table 14.6.3.1.4.1-1: Supported test configurations for NR SA FR1 SS-SINR Measurement Accuracy for Satellite Access

Configuration	Description
14.6.3.1-1	GSO, NR FDD, 15kHz SSB SCS, data SCS 15kHz, 10 MHz BW
14.6.3.1-2	NGSO, NR FDD, 15kHz SSB SCS, data SCS 15kHz, 10 MHz BW

Note:	The UE is only required to be tested in one of the supported test configurations.

Configure the test equipment and the DUT according to the parameters in Table 14.6.3.1.4.1-2

Table 14.6.3.1.4.1-2: Initial conditions for NR SA FR1 SS-SINR Measurement Accuracy for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.6.3.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	NA		

1. The general test parameter settings are set up according to Table 14.6.3.1.4.1-3.
2. Message contents are defined in clause 14.6.3.1.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbour cell, respectively) with the power level set according to clauses C.1.2 and C.1.3. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

14.6.3.1.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD intra-frequency cells as given in table 14.6.3.1.5-1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to Table 14.6.3.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 to configure periodic SS-SINR measurements on the UE.
4. The UE shall transmit an *RRCReconfigurationComplete* message.
5. The UE shall transmit periodic *MeasurementReport* messages.
6. After 10s wait from Step 4, the SS shall check the SS-SINR reported values in the periodic *MeasurementReport*. The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 14.6.3.1.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 14.6.3.1.5-1 as appropriate and repeat steps 5-7.

14.6.3.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.6.3.1.4.3-1: Common Exception messages for NR SA FR1 SS-SINR Measurement Accuracy for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-3 with Condition SS-SINR Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ and SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2

Table 14.6.3.1.4.3-2: *ReportConfigNR* for NR SA FR1 SS-SINR Measurement Accuracy for Satellite Access

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
rsrq	false		
sinr	true		
}			
maxReportCells	2		
}			
}			
}			

14.6.3.1.5 Test requirements

Table 14.6.3.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 SS-SINR Measurement Accuracy for Satellite Access. Table 14.6.3.1.5-2 defines the requirement that the SS-SINR values contained in the *MeasurementReport* shall meet.

Table 14.6.3.1.5-1: Cell specific parameters for NR SA FR1 SS-SINR Measurement Accuracy for Satellite Access

Parameter		**Unit**	**Test 1**		**Test 2**	
			Cell 1	**Cell 2**	**Cell 1**	**Cell 2**
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1, 2		FDD			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1, 2		TRS.1.1 FDD		TRS.1.1 FDD	
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD	-	CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD	-	CCR.1.1 FDD	-
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
SMTC configuration	Config 1, 2		SMTC.2			
Time offset with Cell 1	Config 1, 2	ms	-	3	-	3
SSB configuration	Config 1, 2		SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	15			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						

EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_FDD_SAB_FR1_A,	dBm/15kHz	-93		-116	
		NR_FDD_SAB_FR1_B				-115.5+TT	
		NR_FDD_SAB_FR1_C				-115+TT	
		NR_FDD_SAB_FR1_D				-114.5+TT	
		NR_FDD_SAB_FR1_E				-114+TT	
		NR_FDD_SAB_FR1_F,				-113.5+TT	
		NR_FDD_SAB_FR1_G				-113+TT	
		NR_FDD_SAB_FR1_H				-112.5+TT	
		NR_FDD_SAB_FR1_I				-112+TT	
		NR_FDD_SAB_FR1_J				-111.5+TT	
N_{oc} Note2	Config 1, 2		dBm/SCS	-93		Same as Noc for 15kHz	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.10	-5.10
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-3.50	-3.50
SS-RSRP Note 3	Config 1, 2	NR_FDD_SAB_FR1_A,	dBm/SCS	-88.46	-90.34	-119.50	-119.50
		NR_FDD_SAB_FR1_B				-119.5+TT	-119.5+TT
		NR_FDD_SAB_FR1_C				-119+TT	-119+TT
		NR_FDD_SAB_FR1_D				-118.5+TT	-118.5+TT
		NR_FDD_SAB_FR1_E				-118+TT	-118+TT
		NR_FDD_SAB_FR1_F,				-117.5+TT	-117.5+TT
		NR_FDD_SAB_FR1_G				-117+TT	-117+TT
		NR_FDD_SAB_FR1_H				-116.5+TT	-116.5+TT
		NR_FDD_SAB_FR1_I				-116+TT	-116+TT
		NR_FDD_SAB_FR1_J				-115.5+TT	-115.5+TT
SS-SINR Note3		NR_FDD_SAB_FR1_A,	dB	0	-3.19	-5.10	-5.10
		NR_FDD_SAB_FR1_B					

		NR_FDD_SAB_FR1_C			
		NR_FDD_SAB_FR1_D			
		NR_FDD_SAB_FR1_E			
		NR_FDD_SAB_FR1_F,			
		NR_FDD_SAB_FR1_G			
		NR_FDD_SAB_FR1_H			
		NR_FDD_SAB_FR1_I			
		NR_FDD_SAB_FR1_J			
Io[Note3]	Config 1, 2	NR_FDD_SAB_FR1_A,	dBm/ 9.36MHz	-57.50	-85.28
		NR_FDD_SAB_FR1_B			-85.01+TT
		NR_FDD_SAB_FR1_C			-84.51+TT
		NR_FDD_SAB_FR1_D			-84.01+TT
		NR_FDD_SAB_FR1_E			-83.51+TT
		NR_FDD_SAB_FR1_F,			-83.01+TT
		NR_FDD_SAB_FR1_G			-82.51+TT
		NR_FDD_SAB_FR1_H			-82.01+TT
		NR_FDD_SAB_FR1_I			-81.51+TT
		NR_FDD_SAB_FR1_J			-81.01+TT
Propagation condition			-	AWGN	
Antenna configuration			-	1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3A.4.1A.

Table 14.6.3.1.5-2: SS-SINR Intra frequency absolute accuracy requirements for the reported values

	Test 1	**Test 2**
	All bands	[All bands]
Normal Conditions		
Lowest reported value (Cell 2)	SS-SINR_31	SS-SINR_28
Highest reported value (Cell 2)	SS-SINR_49	SS-SINR_45
Extreme Conditions		
Lowest reported value (Cell 2)	SS-SINR_30	SS-SINR_27
Highest reported value (Cell 2)	SS-SINR_50	SS-SINR_46

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

14.6.3.2 NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access

Editor's Note:

- Undefined Satellite band groups need to be removed in 38.133

14.6.3.2.1 Test purpose

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 14.6.3.0.2.

14.6.3.2.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access and SS-SINR measurements in FR1.

14.6.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.6.3.2.

14.6.3.2.4 Test description

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table 14.6.3.2.4.1-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table 14.6.3.2.5-1. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

14.6.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.6.3.2.4.1-1.

Table 14.6.3.2.4.1-1: Supported test configurations for NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access

Configuration	Description
14.6.3.2-1	GSO, NR FDD, 15kHz SSB SCS, data SCS 15kHz, 10 MHz BW
14.6.3.2-2	NGSO, NR FDD, 15kHz SSB SCS, data SCS 15kHz, 10 MHz BW
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 14.6.3.2.4.1-2

Table 14.6.3.2.4.1-2: Initial conditions for NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.6.3.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	NA		

1. The general test parameter settings are set up according to Table 14.6.3.2.4.1-3.
2. Message contents are defined in clause 14.6.3.2.4.3.
3. Cell 1 and Cell 2 are NR cells (PCell and neighbour cell, respectively) with the power level set according to clauses C.1.2 and C.1.3. Both Cell 1 and Cell 2 are satellite access cells.
4. The initial test environment conditions are setup according to section 14.0.5.

14.6.3.2.4.2 Test procedure

The test scenario comprises of two satellite access NR FDD inter-frequency cells as given in table 14.6.3.2.5-1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to Table 14.6.3.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 to configure periodic SS-SINR measurements on the UE.
4. The UE shall transmit an *RRCReconfigurationComplete* message.
5. The UE shall transmit periodic *MeasurementReport* messages.
6. After 10s wait from Step 4, the SS shall check the SS-SINR reported values in the periodic *MeasurementReport*. The SS-SINR value of Cell 2 reported by the UE is compared to the expected SS-SINR. If the value is outside the limits in Table 14.6.3.2.5-2 or the UE fails to report the measurement value for Cell 2, the number of failed iterations is increased by one. Otherwise, the number of passed iterations is increased by one.
7. The SS shall continue checking the *MeasurementReport* messages transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 14.6.3.2.5-1 as appropriate and repeat steps 5-7.

14.6.3.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.6.3.2.4.3-1: Common Exception messages for NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTER-FREQ and GAP NEEDED Table H.3.1-3 with Condition INTER-FREQ MO and SS-SINR Table H.3.1-5 Table H.3.1-6 with Condition Pattern #0 Table H.3.1-7 with Condition INTER-FREQ and SINR Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.2

Table 14.6.3.2.4.3-2: *ReportConfigNR* for NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access

Derivation Path: 38.508-1 [14] Table 4.6.3-142 with condition PERIODICAL			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
periodical SEQUENCE {			PERIODICAL
reportQuantityCell SEQUENCE {			
rsrp	false		
rsrq	false		

sinr	true		
}			
maxReportCells	2		
}			
}			
}			

14.6.3.2.5 Test requirements

Table 14.6.3.2.5-1 defines the primary level settings including test tolerances for NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access. Table 14.6.3.2.5-2 and 14.6.3.2.5-3 define the absolute and relative requirements, correspondingly, that the SS-SINR values contained in the *MeasurementReport* shall meet.

Table 14.6.3.2.5-1: Cell specific parameters for NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN				freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1, 2			FDD					
Downlink initial BWP configuration				DLBWP.0.1					
Downlink dedicated BWP configuration				DLBWP.1.1					
Uplink initial BWP configuration				ULBWP.0.1					
Uplink dedicated BWP configuration				ULBWP.1.1					
DRX Cycle configuration			ms	Not Applicable					
Gap pattern ID				0	-	0	-	0	-
TRS configuration	Config 1, 2			TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD	
PDSCH Reference measurement channel	Config 1, 2			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1, 2			CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1, 2			CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
OCNG Patterns				OP.1					
SS-RSSI-Measurement				Not Applicable					
Time offset with Cell 1	Config 1, 2		ms	-	3	-	3	-	3
SMTC configuration	Config 1, 2			SMTC pattern 2					
SSB configuration	Config 1, 2			SSB.1 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1, 2		kHz	15					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1, 2	NR_FDD_SAB_FR1_A,	dBm/15kHz	-88		-108.5		-119.5	
		NR_FDD_SAB_FR1_B						-119+TT	
		NR_FDD_SAB_FR1_C						-118.5+TT	
		NR_FDD_SAB_FR1_D						-118+TT	
		NR_FDD_SAB_FR1_E						-117.5+TT	
		NR_FDD_SAB_FR1_F,						-117+TT	

		NR_FDD_SAB_FR1_G						-116.5+TT	
		NR_FDD_SAB_FR1_H						-116+TT	
		NR_FDD_SAB_FR1_I						-115.5+TT	
		NR_FDD_SAB_FR1_J						-115+TT	
N_{oc} Note2	Config 1, 2		dBm/SCS	-88		-108.5		Same as Noc for 15kHz	
$\hat{E}_s/I_{ot}$			dB	-1.75	-1.75	20	20	-2.1	-2.1
$\hat{E}_s/N_{oc}$			dB	-1.75		20		-2.1	
SS-RSRP Note3	Config 1, 2	NR_FDD_SAB_FR1_A,	dBm/SCS	-89.75		-88.50		-121.60	
		NR_FDD_SAB_FR1_B						-123+TT	
		NR_FDD_SAB_FR1_C						-122.5+TT	
		NR_FDD_SAB_FR1_D						-122+TT	
		NR_FDD_SAB_FR1_E						-121.5+TT	
		NR_FDD_SAB_FR1_F,						-121+TT	
		NR_FDD_SAB_FR1_G						-120.5+TT	
		NR_FDD_SAB_FR1_H						-120+TT	
		NR_FDD_SAB_FR1_I						-119.5+TT	
		NR_FDD_SAB_FR1_J						-119+TT	
SS-SINR Note3		NR_FDD_SAB_FR1_A,	dB	-1.75		20		-2.10	
		NR_FDD_SAB_FR1_B							
		NR_FDD_SAB_FR1_C							
		NR_FDD_SAB_FR1_D							
		NR_FDD_SAB_FR1_E							
		NR_FDD_SAB_FR1_F,							
		NR_FDD_SAB_FR1_G							
		NR_FDD_SAB_FR1_H							
		NR_FDD_SAB_FR1_I							
		NR_FDD_SAB_FR1_J							
Io Note3	Config 1, 2	NR_FDD_SAB_FR1_A,	dBm/ 9.36MHz	-57.83		-60.50		-89.46	
		NR_FDD_SAB_FR1_B						-89.59+TT	

		NR_FDD_SAB_FR1_C				-89.09+TT
		NR_FDD_SAB_FR1_D				-88.59+TT
		NR_FDD_SAB_FR1_E				-88.09+TT
		NR_FDD_SAB_FR1_F,				-87.59+TT
		NR_FDD_SAB_FR1_G				-87.09+TT
		NR_FDD_SAB_FR1_H				-86.59+TT
		NR_FDD_SAB_FR1_I				-86.09+TT
		NR_FDD_SAB_FR1_J				-85.59+TT
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in clause 3A.4.1A.

Table 14.6.3.2.5-2: Reported SS-SINR Intra frequency absolute accuracy requirements for NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-SINR_35	SS-SINR_79	SS-SINR_34
Highest reported value (Cell 2)	SS-SINR_51	SS-SINR_94	SS-SINR_51
Extreme Conditions			
Lowest reported value (Cell 2)	SS-SINR_33	SS-SINR_77	SS-SINR_33
Highest reported value (Cell 2)	SS-SINR_53	SS-SINR_96	SS-SINR_52

Table 14.6.3.2.5-3: Reported SS-SINR Intra frequency relative accuracy requirements for NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-SINR_x - 10	SS-SINR_x - 10	SS-SINR_x - 11
Highest reported value (Cell 2)	SS-SINR_x + 10	SS-SINR_x + 10	SS-SINR_x + 11
Extreme Conditions			
Lowest reported value (Cell 2)	SS-SINR_x - 11	SS-SINR_x - 11	SS-SINR_x - 11
Highest reported value (Cell 2)	SS-SINR_x + 11	SS-SINR_x + 11	SS-SINR_x + 11

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

14.6.4 L1-RSRP Beam Reporting Measurement Requirements for SAN

14.6.4.0 Minimum conformance requirements

14.6.4.0.1 Minimum conformance requirements for SSB based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$ is defined in Table 14.6.4.0.1-1 for FR1, where

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise
- P value for SSB resource to be measured is defined as
  - $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
  - $N_{total} / N_{available}$ with $N_{available} > 0$
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any SSB resource occasion:
  - N_{total} is the total number of SSB resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is
    - the number of SSB resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
    - same as $N_{outside_MG}$, otherwise
  - T_{L1} is periodicity of the target SSB.
  - $P_{sharing\ factor} = 3$.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 14.6.4.0.1-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_SAN}$ (ms)
non-DRX	$\max(T_{Report}, ceil(M*P)*T_{SSB})$
DRX cycle ≤ 320ms	$\max(T_{Report}, ceil(1.5*M*P)*\max(T_{DRX},T_{SSB}))$
DRX cycle > 320ms	$ceil(M*P)*T_{DRX}$
Note: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

The normative reference for this requirement is TS 38.133 [6] clause 9.5C.4.1.

14.6.4.0.1.1 Absolute SSB based L1-RSRP accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 14.6.4.0.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.19 for a corresponding Band for each relevant SSB.

- Valid information for the SAN serving the target cell has been provided.

Table 14.6.4.0.1.1-1: SSB based L1-RSRP absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io [Note 1] range				
			NR operating band groups [Note 2]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[5]	±[9.5]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-70
±[8.5]	±[11.5]	≥-3	NR_FDD_SAB_FR1_A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3A.4.1A.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.19C.1.1.

14.6.4.0.1.2 Relative SSB based L1-RSRP accuracy

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the serving cell.

The accuracy requirements in Table 14.6.4.0.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.19 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 14.6.4.0.1.2-1: SSB based L1-RSRP relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot [Note 2]	Io [Note 1] range				
			NR operating band groups [Note 4]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±[3]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of SSBs to which the requirement applies. NOTE 3: Void NOTE 4: NR operating band groups in FR1 are as defined in clause 3A.4.1A.							

The normative reference for this requirement is TS 38.133 [6] clause 10.1.19C.1.2.

14.6.4.0.2 Minimum conformance requirements for CSI-RS based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_SAN}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS}$ is defined in Table 14.6.4.0.2-1 for FR1, where

- For periodic and semi-persistent CSI-RS resources, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise

- For aperiodic CSI-RS resources M=1
- P value for a CSI-RS resource to be measured is defined as
  - $P_{sharing\ factor} * N_{total} / N_{outside_MG}$ with $N_{available} = 0$
  - $N_{total} / N_{available}$ with $N_{available} > 0$
- For a window W of duration max($T_{L1,}$ MGRP_max), where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any CSI-RS resource occasion:
  - N_{total} is the total number of CSI-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
  - $N_{outside_MG}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is
    - the number of SSB resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
    - same as $N_{outside_MG}$, otherwise
  - T_{L1} is periodicity of the target CSI-RS.
  - $P_{sharing\ factor} = 3$.

Note: The overlap between CSI-RS for L1-RSRP measurement and SMTC means that CSI-RS for L1-RSRP measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Table 14.6.4.0.2-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_SAN}$ for FR1

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_SAN}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M*P)*T_{CSI\text{-}RS})$
DRX cycle ≤ 320ms	$\max(T_{Report}, \text{ceil}(1.5*M*P)*\max(T_{DRX}, T_{CSI\text{-}RS}))$
DRX cycle > 320ms	$\text{ceil}(M*P)*T_{DRX}$
Note 1: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

The normative reference for this requirement is TS 38.133 [6] clause 9.5C.4.2.

14.6.4.0.2.1 Absolute CSI-RS based L1-RSRP accuracy

FFS

The normative reference for this requirement is TS 38.133 [6] clause 10.1.19C.2.1.

14.6.4.0.2.2 Relative CSI-RS based L1-RSRP accuracy

FFS

The normative reference for this requirement is TS 38.133 [6] clause 10.1.19C.2.2.

14.6.4.1 NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access

Editor's Note:

- Accuracy requirements are in brackets in 38.133
- Undefined Satellite band groups need to be removed in 38.133

14.6.4.1.1 Test purpose

The purpose of this test is to verify that the SSB based L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 14.6.4.0.1.

14.6.4.1.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access in FR1.

14.6.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.6.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.14.6.4.1.

14.6.4.1.4 Test description

In this set of test cases there one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table 14.6.4.1.5-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table 14.6.4.1.5-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

14.6.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.6.4.1.4.1-1.

Table 14.6.4.1.4.1-1: Supported test configurations for NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access

Configuration	Description
14.6.4.1-1	GSO, NR FDD, 15kHz SSB SCS, data SCS 15kHz, 10 MHz BW
14.6.4.1-2	NGSO, NR FDD, 15kHz SSB SCS, data SCS 15kHz, 10 MHz BW
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 14.6.4.1.4.1-2

Table 14.6.4.1.4.1-2: Initial conditions for NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.6.4.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

1. The general test parameter settings are set up according to Table 14.6.4.1.4.1-3.

2. Message contents are defined in clause 14.6.4.1.4.3.
3. Cell 1 is an NR cell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 1 is a satellite access cell.
4. The initial test environment conditions are setup according to section 14.0.5.

14.6.4.1.4.2 Test procedure

The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in Table 14.6.4.1.5-1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to Table 14.6.4.1.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 to configure periodic SSB based L1-RSRP measurements on the UE.
4. The UE shall transmit an *RRCReconfigurationComplete* message.
5. The UE shall transmit periodic L1-RSRP messages including measurements for both SSB#0 and SSB#1.
6. After 10s wait from Step 4, the SS shall check the L1-RSRP reported values of SSB#0 or SSB#1 in the periodic L1-RSRP reports. If the value for the reported SSBs is within the limits in Table 14.6.4.1.5-2 and Table 14.6.4.1.5-3, the number of passed iterations is increased by one. If the values are outside the limits in Table 14.6.4.1.5-2 or Table 14.6.4.1.5-3, the number of failed iterations is increased by one.
7. The SS shall continue checking the reported L1-RSRP measurements transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 14.6.4.1.5-1 as appropriate and repeat steps 5-7.

14.6.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.6.4.1.4.3-1: Common Exception messages for NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and SS-RSRP Table H.3.6-3 with conditions SSB and PERIODIC Table H.3.6-10 Table H.3.5-8 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.6.4.1.4.3-2: *RadioLinkMonitoringConfig* for NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	

detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

14.6.4.1.5 Test requirements

Table 14.6.4.1.5-1 defines the primary level settings including test tolerances for NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access. Table 14.6.4.1.5-2 and Table 14.6.4.1.5-3 define the absolute and relative accuracy, respectively, that the L1-RSRP shall meet.

Table 14.6.4.1.5-1: Cell specific parameters for NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access

Parameter		Config	Unit	Test 1	Test 2
SSB GSCN		1, 2		freq1	freq1
Duplex mode		1, 2		FDD	FDD
TDD Configuration		1, 2		N/A	N/A
$BW_{channel}$		1, 2	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel		1, 2		SR.1.1 FDD	SR.1.1 FDD
RMSI CORESET Reference Channel		1, 2		CR.1.1 FDD	CR.1.1 FDD
Dedicated CORESET Reference Channel		1, 2		CCR.1.1 FDD	CCR.1.1 FDD
SSB configuration		1, 2		SSB.3 FR1	SSB.3 FR1
OCNG Patterns		1, 2		OP.1	OP.1
Initial BWP Configuration		1, 2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
TRS configuration		1, 2		TRS.1.1 FDD	TRS.1.1 FDD
Dedicated BWP configuration		1, 2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1, 2		SMTC.1	SMTC.1
reportConfigType		1, 2		periodic	periodic
reportQuantity		1, 2		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS		1, 2		2	2
L1-RSRP reporting period		1, 2		slot80	slot80
EPRE ratio of PSS to SSS		1, 2	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_SAB_FR1_A	1, 2	dBm/15kHz	-94.65	-117
	NR_FDD_SAB_FR1_B				-116.5+TT
	NR_FDD_SAB_FR1_C				-116+TT
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-115.5+TT
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-115+TT

	NR_FDD_SAB_FR1_H				-114.5+TT
	NR_FDD_SAB_FR1_I				-114+TT
	NR_FDD_SAB_FR1_J				-113.5+TT
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1, 2	dBm/SSB SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5+TT
	NR_TDD_FR1_C				-116+TT
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5+TT
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115+TT
	NR_FDD_FR1_F				-114.5+TT
	NR_FDD_FR1_G				-114+TT
	NR_FDD_FR1_H				-113.5+TT
	NR_FDD_FR1_N				-110.5+TT
$\hat{E}_s/I_{ot}$		1, 2	dB	10	-2.2
SSB RSRP Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/SSB SCS	-84.65	-119.20
	NR_FDD_SAB_FR1_B				-119.5+TT
	NR_FDD_SAB_FR1_C				-119+TT
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-118.5+TT
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-118+TT
	NR_FDD_SAB_FR1_H				-117.5+TT
	NR_FDD_SAB_FR1_I				-117+TT
	NR_FDD_SAB_FR1_J				-116.5+TT
Io Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/9.36 MHz	-56.28	-87.00
	NR_FDD_SAB_FR1_B				-86.78+TT
	NR_FDD_SAB_FR1_C				-86.28+TT
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-85.78+TT
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-85.28+TT
	NR_FDD_SAB_FR1_H				-84.78+TT
	NR_FDD_SAB_FR1_I				-84.28+TT
	NR_FDD_SAB_FR1_J				-83.78+TT
$\hat{E}_s/N_{oc}$		1, 2	dB	10	-2.2
Propagation condition		1, 2		AWGN	AWGN
Antenna configuration		1, 2		1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table 14.6.4.1.5-2: L1-RSRP absolute accuracy requirements for NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access

	Test 1	Test 2
	All bands	[All bands]
Normal Conditions		
Lowest reported value (Cell 1)	62	31

Highest reported value (Cell 1)	82	44
Extreme Conditions		
Lowest reported value (Cell 1)	59	26
Highest reported value (Cell 1)	85	49
Note 1: NR operating band groups are defined in Table 3A.4.1A-1.		

Table 14.6.4.1.5-3: L1-RSRP relative accuracy requirements for NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access

	Test 1	Test 2
	All bands	[All bands]
Normal Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2
Extreme Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2
Note 1: NR operating band groups are defined in Table 3A.4.1A-1.		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

14.6.4.2 NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access

Editor's Note:

- Accuracy requirements are in brackets in 38.133
- Undefined Satellite band groups need to be removed in 38.133

14.6.4.2.1 Test purpose

The purpose of this test is to verify that the CSI-RS based L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 14.6.4.0.2.

14.6.4.2.2 Test applicability

This test applies to all types of NR UE release 17 and forward supporting satellite access in FR1.

14.6.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 14.6.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.14.6.4.2.

14.6.4.2.4 Test description

In this set of test cases there one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table 14.6.4.2.5-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table 14.6.4.2.5-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM, BFD based on SSB#0 and SSB$1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

14.6.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 14.6.4.2.4.1-1.

Table 14.6.4.2.4.1-1: Supported test configurations for NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access

Configuration	Description
14.6.4.2-1	GSO, NR FDD, 15kHz SSB SCS, data SCS 15kHz, 10 MHz BW
14.6.4.2-2	NGSO, NR FDD, 15kHz SSB SCS, data SCS 15kHz, 10 MHz BW
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 14.6.4.2.4.1-2

Table 14.6.4.2.4.1-2: Initial conditions for NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.12-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 14.6.4.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

1. The general test parameter settings are set up according to Table 14.6.4.2.4.1-3.
2. Message contents are defined in clause 14.6.4.2.4.3.
3. Cell 1 is an NR cell with the power level set according to clauses C.1.2 and C.1.3 for this test. Cell 1 is a satellite access cell.
4. The initial test environment conditions are setup according to section 14.0.5.

14.6.4.2.4.2 Test procedure

The UE shall be configured for periodic CSI reporting in PUCCH [format 2] with a reporting periodicity as mentioned in Table 14.6.4.2.5-1.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity NR, Connected without release On and Test Mode On according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
2. Set the parameters according to Table 14.6.4.2.5-1 as appropriate.
3. The SS shall transmit an *RRCReconfiguration* message on Cell 1 to configure periodic CSI-RS based L1-RSRP measurements on the UE.
4. The UE shall transmit an *RRCReconfigurationComplete* message.
5. The UE shall transmit periodic L1-RSRP messages including measurements for both CSI-RS#0 and CSI-RS#1.
6. After 10s wait from Step 4, the SS shall check the L1-RSRP reported values of CSI-RS#0 or CSI-RS#1 in the periodic L1-RSRP reports. If the value for the reported CSI-RSs is within the limits in Table 14.6.4.2.5-2 and Table 14.6.4.2.5-3, the number of passed iterations is increased by one. If the values are outside the limits in Table 14.6.4.2.5-2 or Table 14.6.4.2.5-3, the number of failed iterations is increased by one.
7. The SS shall continue checking the reported L1-RSRP measurements transmitted by the UE until the confidence level according to Table G.2.3-1 in Annex G is achieved.
8. Set the parameters according to each sub-test in Table 14.6.4.2.5-1 as appropriate and repeat steps 5-7.

14.6.4.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 14.6.4.2.4.3-1: Common Exception messages for NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.6-2 with conditions PERIODIC and CSI-RSRP Table H.3.6-3 with conditions CSI-RS and PERIODIC Table H.3.6-10 Table 7.3.1-3 in TS 38.508-1 [14] with condition SMTC.1

Table 14.6.4.2.4.3-2: *RadioLinkMonitoringConfig* for NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	1 entry		
purpose	both	UE is configured to perform RLM and BFD based on the SSBs.	
detectionResource CHOICE {			
ssb-Index	0		
}			
}			
}			

14.6.4.2.5 Test requirements

Table 14.6.4.2.5-1 defines the primary level settings including test tolerances for NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access. Table 14.6.4.2.5-2 and Table 14.6.4.2.5-3 define the absolute and relative accuracy, respectively, that the L1-RSRP shall meet.

Table 14.6.4.2.5-1: Cell specific parameters for NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1, 2		freq1	freq1
Duplex mode	1, 2		FDD	FDD
TDD Configuration	1, 2		N/A	N/A
$BW_{channel}$	1, 2	MHz	10: $N_{RB,c}$ = 52	10: $N_{RB,c}$ = 52
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD	SR.1.1 FDD
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD	CR.1.1 FDD
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD	CCR.1.1 FDD
SSB configuration	1, 2		SSB.3 FR1	SSB.3 FR1
OCNG Patterns	1, 2		OP.1	OP.1
TRS configuration	1, 2		TRS.1.1 FDD	TRS.1.1 FDD
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1, 2		SMTC.1	SMTC.1
CSI-RS	1, 2		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
reportConfigType	1, 2		periodic	periodic
reportQuantity	1, 2		cri-RSRP	cri-RSRP
Number of reported RS	1, 2		2	2

L1-RSRP reporting period		1, 2		slot80	slot80
EPRE ratio of PSS to SSS		1, 2	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2	NR_FDD_SAB_FR1_A	1, 2	dBm/15kHz	-94.65	-117
	NR_FDD_SAB_FR1_B				-116.5+TT
	NR_FDD_SAB_FR1_C				-116+TT
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-115.5+TT
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-115+TT
	NR_FDD_SAB_FR1_H				-114.5+TT
	NR_FDD_SAB_FR1_I				-114+TT
	NR_FDD_SAB_FR1_J				-113.5+TT
N_{oc} Note2	NR_FDD_SAB_FR1_A	1, 2	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_SAB_FR1_B				-116.5+TT
	NR_FDD_SAB_FR1_C				-116+TT
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-115.5+TT
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-115+TT
	NR_FDD_SAB_FR1_H				-114.5+TT
	NR_FDD_SAB_FR1_I				-114+TT
	NR_FDD_SAB_FR1_J				-113.5+TT
$\hat{E}_s/I_{ot}$		1, 2	dB	10	-2.20
CSI-RS RSRP Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/CSI-RS SCS	-84.65	-119.20
	NR_FDD_SAB_FR1_B				-119.5+TT
	NR_FDD_SAB_FR1_C				-119+TT
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-118.5+TT
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-118+TT
	NR_FDD_SAB_FR1_H				-117.5+TT
	NR_FDD_SAB_FR1_I				-117+TT
	NR_FDD_SAB_FR1_J				-116.5+TT
Io Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/9.36 MHz	-56.28	-87.00
	NR_FDD_SAB_FR1_B				-86.78+TT
	NR_FDD_SAB_FR1_C				-86.28+TT
	NR_FDD_SAB_FR1_D NR_FDD_SAB_FR1_E				-85.78+TT
	NR_FDD_SAB_FR1_F NR_FDD_SAB_FR1_G				-85.28+TT
	NR_FDD_SAB_FR1_H				-84.78+TT

	NR_FDD_SAB_FR1_I				-84.28+TT
	NR_FDD_SAB_FR1_J				-83.78+TT
$\hat{E}_s/N_{oc}$		1, 2	dB	10	-2.2
Propagation condition		1, 2		AWGN	AWGN
Antenna configuration		1, 2		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

Table 14.6.4.2.5-2: L1-RSRP absolute accuracy requirements for NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value	62	31
Highest reported value	82	44
Extreme Conditions		
Lowest reported value	59	26
Highest reported value	85	49
Note 1: NR operating band groups are defined in Table 3A.4.1A-1.		

Table 14.6.4.2.5-3: L1-RSRP relative accuracy requirements for NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2
Extreme Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2
Note 1: NR operating band groups are defined in Table 3A.4.1A-1.		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

15 FFS

16 NR standalone tests in FR1 for RedCap

16.0 General

This clause contains test scenarios for NR standalone for Reduced Capability UE. All NR cells are in Frequency Range 1.

16.1 RRC_IDLE state mobility

16.1.1 NR cell re-selection for RedCap

16.1.1.0 Minimum conformance requirements

16.1.1.0.1 Minimum conformance requirements for intra-frequency cell re-selection for RedCap

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS 38.304 [30] within $T_{detect,NR_Intra_RedCap}$ when that Treselection= 0 . An intra frequency cell is considered to be detectable according to the conditions defined in TS 38.133 [6] Annex B.x.y for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra_RedCap}$ for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra_RedCap}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS 38.304 [30] within $T_{evaluate,NR_Intra_RedCap}$ when $T_{reselection} = 0$ provided that:

when *rangeToBestCell* is not configured:

- the cell is at least 3dB better ranked in FR1 for 2 Rx RedCap.
- the cell is at least 4dB better ranked in FR1 for 1 Rx RedCap.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS 38.304 [30] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
    - if there are multiple such cells, the cell has the highest rank among them.
        - the cell is at least 3dB better ranked in FR1 if the current serving cell is among them for 2 Rx RedCap.
        - the cell is at least 4dB better ranked in FR1 if the current serving cell is among them for 1 Rx RedCap.

The 1 Rx RedCap UE applies *absThreshSS-BlocksConsolidation* as the signalled value of *absThreshSS-BlocksConsolidation* [2] + 1 dB.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the intra-frequency cell is satisfied with the reselection criteria which are defined in TS 38.304 [30], the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

For 1 Rx RedCap not configured with eDRX_IDLE cycle, $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ are specified in Table 16.1.1.0.1-1. For 2 Rx RedCap not configured with eDRX_IDLE cycle, $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ are same as T_{detect,NR_Intra}, $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ specified in TS 38.133 [6] in Table 4.2.2.3-1.

For 1 Rx RedCap and 2 Rx RedCap configured with eDRX_IDLE cycle, $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ are specified in Table 16.1.1.0.1-2 for FR1, where the requirements apply provided that the serving cell is configured with eDRX_IDLE and is the same in all PTWs during any of $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ when multiple PTWs are used.

Table 16.1.1.0.1-1: $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Intra_RedCap}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x M2 (36 x N1 x M2)	1.28 x N1 x M2 (4 x N1 x M2)	5.12 x N1 x M2 (16 x N1 x M2)
0.64		5	17.92 x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)

Note 1: Applies for RedCap UE of all FR2 power class.
Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{detect, NR_intra_RedCap}$ is expected.

Table 16.1.1.0.1-2: $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{measure,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{evaluate,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])
2.56	-	-	58.88 (23)	2.56 (1)	7.68 (3)
5.12	-	-	117.76 (23)	5.12 (1)	10.24 (2)
10.24	-	-	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥[1.28] ([1])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ (23)	0.32 x M2 (1 x M2)	0.64 x M2 (2 x M2)
	0.64	≥[1.28] ([1])		0.64 (1)	1.28 (2)
	1.28	≥[2.56] ([2])		1.28 (1)	2.56 (2)
	2.56	≥[5.12] ([4])		2.56 (1)	5.12 (2)

Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].

Note 3:	Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.
Note 4:	The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 5:	M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, being configured with eDRX_IDLE cycle, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

16.1.1.0.2 Minimum conformance requirements for inter-frequency cell re-selection for RedCap

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS 38.304 [30] within $K_{carrier_RedCap} * T_{detect,NR_Inter_RedCap}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection}$ = 0 provided that the reselection criteria is met

For 2 Rx RedCap by a margin of at least

5 dB in FR1 for reselections based on ranking or

6 dB in FR1 for SS-RSRP reselections based on absolute priorities or

4 dB in FR1 for SS-RSRQ reselections based on absolute priorities

For 1 Rx RedCap by a margin of at least

[5 dB] in FR1 or for reselections based on ranking or

[6 dB] in FR1 for SS-RSRP reselections based on absolute priorities or

[4 dB] in FR1 for SS-RSRQ reselections based on absolute priorities.

The parameter $K_{carrier_RedCap}$ is the number of NR inter-frequency carriers indicated by the serving cell. An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.x.y for a corresponding Band. When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter_RedCap}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier_RedCap} * T_{measure,NR_Inter_RedCap}$ for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [1] within $K_{carrier} * T_{evaluate,NR_Inter_RedCap}$ when $T_{reselection} = 0$ provided that the reselection criteria is met by

- the condition when performing equal priority reselection and
  - when *rangeToBestCell* is not configured:
    - the cell is at least 5dB better ranked in FR1 for 2 Rx RedCap.
    - the cell is at least [5dB] better ranked in FR1 for 1 Rx RedCap.
  - when *rangeToBestCell* is configured:
    - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value defined in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
      - if there are multiple such cells, the cell has the highest rank among them
      - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 if the current serving cell is among them, or 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities for 2 Rx RedCap or 4dB in FR1 or 4dB in FR2 for SS-RSRQ reselections based on absolute priorities for 2 Rx RedCap.
      - the cell is at least [5dB] better ranked in FR1 if the current serving cell is among them, or [6dB] in FR1 for SS-RSRP reselections based on absolute priorities or [4dB] in FR1 for SS-RSRQ reselections based on absolute priorities for 1 Rx RedCap.

The 1 Rx RedCap UE applies *absThreshSS-BlocksConsolidation* as the signalled value of *absThreshSS-BlocksConsolidation* [2] + 1 dB.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 4.2B.2.4-1 or Table 4.2.2.4-1 for 1 Rx RedCap and 2 Rx RedCap respectively, under the following conditions:

- $T_{SMTC_intra} = T_{SMTC_inter} = 160$ ms; where T_{SMTC_intra} and T_{SMTC_inter} are periodicities of the SMTC occasions configured for the intra-frequency carrier and the inter-frequency carrier respectively, and
- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and
- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion defined in TS38.304 [1].

For UE not configured with eDRX_IDLE cycle, $T_{detect,NR_Inter_RedCap,}$ $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ are specified in Table 4.2B.2.4.1-1.

For 1 Rx RedCap configured with eDRX_IDLE cycle, $T_{detect,NR_Inter_RedCap,}$ $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ are specified in Table 4.2B.2.4-2 for FR1. For 1 Rx RedCap and 2 Rx RedCap configured with eDRX_IDLE cycle, $T_{detect,NR_Inter_RedCap,}$ $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ are specified in Table 4.2B.2.4-2 and Table 4.2B.2.4-3 for FR1 and FR2 respectively. The requirements apply provided that the serving cell is configured with

eDRX_IDLE and is the same in all PTWs during any of $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ when multiple PTWs are used.

Table 4.2B.2.4-1: $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Inter_RedCap}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x 1.5 (36 x N1 x 1.5)	1.28 x N1 x 1.5 (4 x N1 x 1.5)	5.12 x N1 x 1.5 (16 x N1 x 1.5)
0.64		5	17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: Applies for RedCap UE of all FR2 power class.					

Table 4.2B.2.4-2: $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{measure,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{evaluate,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])
2.56	-	-	58.88 (23)	2.56 (1)	7.68 (3)
5.12	-	-	117.76 (23)	5.12 (1)	10.24 (2)
10.24	-	-	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥1.28 (1)	$\frac{eDRX_cycle_length}{23} \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ (23)	0.32 x 1.5 (1 x 1.5)	0.64 x 1.5 (2 x 1.5)
	0.64	≥1.28 (1)		0.64 (1)	1.28 (2)
	1.28	≥2.56 (2)		1.28 (1)	2.56 (2)
	2.56	≥5.12 (4)		2.56 (1)	5.12 (2)
NOTE 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs. NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles. NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Inter_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.					

Table 4.2B.2.4-3: $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) [Note1]	$T_{detect,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{measure,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])	$T_{evaluate,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 3])
2.56	-	-	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
5.12	-	-	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	10.24 x N1 (2 x N1)
10.24	-	-	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	20.48 x N1 (2 x N1)

20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥5.12 (4)	8	$eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1)	0.32 x N1 (1 x N1)	0.64 x N1 (2 x N1)
	0.64	≥6.4 (5)	5		0.64 x N1 (1 x N1)	1.28 x N1 (2 x N1)
	1.28	≥10.24 (8)	4		1.28 x N1 (1 x N1)	2.56 x N1 (2 x N1)
	2.56	≥15.36 (12)	3		2.56 x N1 (1 x N1)	5.12 x N1 (2 x N1)
NOTE 1: Applies for RedCap UE of all power class. NOTE 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs. NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles. NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Inter_RedCap} * DRX_cycle}{1.28} \right\rceil * 1.28$.						

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, being configured with eDRX_IDLE cycle, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

16.1.1.0.3 Minimum conformance requirements for intra-frequency cell re-selection for RedCap UE configured with stationary relaxed measurement criterion

This clause contains the requirements for measurements on intra-frequency NR cells when Srxlev ≤ $S_{IntraSearchP}$ or Squal ≤ $S_{IntraSearchQ}$ and when the UE is configured any of the following relaxed measurement criteria:

- Relaxed measurement criterion for a stationary UE defined in clause 5.2.4.9.3 in TS 38.304 [30],
- Relaxed measurement criterion for a stationary UE not at cell edge defined in clause 5.2.4.9.4 in 38.304 [30],
- Both low mobility criterion and stationary criterion as defined in clause 5.2.4.9.1 and 5.2.4.9.3 or 5.2.4.9.4 in 38.304 [30] respectively.

The 1 Rx RedCap UE for the evaluation of one or more relaxed measurement criteria defined in clause 5.2.4.9 38.304 [30] applies:

- *s-SearchDeltaP-r16* as the signalled value of *s-SearchDeltaP-r16* [2] - 1 dB.
- *s-SearchDeltaP-Stationary-r17* as the signalled value of *s-SearchDeltaP-Stationary-r17* [2] - 1 dB.
- *s-SearchThresholdP-r16* as the signalled value of *s-SearchThresholdP-r16* [2] + 1 dB.
- *s-SearchThresholdQ-r16* as the signalled value of *s-SearchThresholdQ-r16* [2] + 1 dB.
- *s-SearchThresholdP2-r17* as the signalled value of *s-SearchThresholdP2-r17* [2] + 1 dB.
- *s-SearchThresholdQ2-r17* as the signalled value of *s-SearchThresholdQ2-r17* [2] + 1 dB.

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and UE has fulfilled that criterion, or
- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled only the *stationaryMobilityEvaluation* [2] criterion

The requirements defined in clause 4.2B.2.3 apply for this clause except that:

- $T_{detect,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.2-1 and Table 4.2B.2.9.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

- $T_{measure,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.2-1 and Table 4.2B.2.9.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

- $T_{evaluate,NR_Intra_RedCap_Relax}$ as specified in Table 4.2B.2.9.2-1 and Table 4.2B.2.9.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.9.2-3 and Table 4.2B.2.9.2-4 are applicable for eDRX cycle up to 10.24 s in FR1 and FR2 respectively.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, then the requirements in Table 4.2B.2.9.2-5 and Table 4.2B.2.9.2-6 respectively apply provided eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 4.2B.2.9.2-1: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UEs fulfilling stationary criterion for 1 Rx RedCap UE

DRX cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x M2 x K3 (36 x M2 x K3)	1.28 x M2 x K3 (4 x M2 x K3)	5.12 x M2 x K3 (16 x M2 x K3)
0.64	17.92 x K3 (28 x K3)	1.28 x K3 (2 x K3)	5.12 x K3 (8 x K3)
1.28	32 x K3 (25 x K3)	1.28x K3 (1 x K3)	6.4 x K3 (5 x K3)
2.56	58.88 x K3 (23 x K3)	2.56 x K3 (1 x K3)	7.68 x K3 (3 x K3)

Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T_{detect, NR_intra} is expected.

Note 2: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

Table 4.2B.2.9.2-2: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UEs fulfilling stationary criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x M2 x K3 (36 x N1 x M2 x K3)	1.28 x N1 x M2 x K3 (4 x N1 x M2 x K3)	5.12 x N1 x M2 x K3 (16 x N1 x M2 x K3)
0.64		5	17.92 x N1 x K3 (28 x N1 x K3)	1.28 x N1 x K3 (2 x N1 x K3)	5.12 x N1 x K3 (8 x N1 x K3)
1.28		4	32 x N1 x K3 (25 x N1 x K3)	1.28 x N1 x K3 (1 x N1 x K3)	6.4 x N1 x K3 (5 x N1 x K3)
2.56		3	58.88 x N1 x K3 (23 x N1 x K3)	2.56 x N1 x K3 (1 x N1 x K3)	7.68 x N1 x K3 (3 x N1 x K3)

Note 1: Applies for RedCap UE of all supporting FR2 power classes.

Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T_{detect, NR_intra} is expected.

Note 3: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

Table 4.2B.2.9.2-3: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle up to 10.24 s

eDRX_IDLE cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
2.56	58.88 x K3 (23 x K3)	2.56 x K3 (1 x K3)	7.68 x K3 (3 x K3)
5.12	117.76 x K3 (23 x K3)	5.12 x K3 (1 x K3)	10.24 x K3 (2 x K3)
10.24	235.52 x K3 (23 x K3)	10.24 x K3 (1 x K3)	20.48 x K3 (2 x K3)
Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.			

Table 4.2B.2.9.2-4: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle up to 10.24 s

eDRX_IDLE cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
2.56	58.88 x N1 x K3 (23 x N1 x K3)	2.56 x N1 x K3 (1 x K3)	7.68 x N1 x K3 (3 x N1 x K3)
5.12	117.76 x N1 x K3 (23 x N1 x K3)	5.12 x N1 x K3 (1 x N1 x K3)	10.24 x N1 x K3 (2 x N1 x K3)
10.24	235.52 x N1 x K3 (23 x N1 x K3)	10.24 x N1 x K3 (1 x N1 x K3)	20.48 x N1 x K3 (2 x N1 x K3)
Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.			

Table 4.2B.2.9.2-5: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥[6.4] ([5])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ x K3 (23 x K3)	0.32 x M2 x K3 (1 x M2 x K3)	0.64 x M2 x K3 (2 x M2 x K3)
	0.64	≥[12.8] ([10])		0.64 x K3 (1 x K3)	1.28 x K3 (2 x K3)
	1.28	≥[15.36] ([12])		1.28 x K3 (1 x K3)	2.56 x K3 (2 x K3)
	2.56	≥[30.72] ([24])		2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)
Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs.					
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].					
Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.					
Note 4: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{detect,\ NR_intra_RedCap}$ is expected.					
Note 5: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.					

Table 4.2B.2.9.2-6: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥30.72 (24)	8	K3 x $eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K3)	0.32 x N1 x K3 (1 x N1 x K3)	0.64 x N1 x K3 (2 x N1 x K3)
	0.64	≥38.4 (30)	5		0.64 x N1 x K3 (1 x N1 x K3)	1.28 x N1 x K3 (2 x N1 x K3)
	1.28	≥61.44 (48)	4		1.28 x N1 x K3 (1 x N1 x K3)	2.56 x N1 x K3 (2 x N1 x K3)
	2.56	≥92.16 (72)	3		2.56 x N1 x K3 (1 x N1 x K3)	5.12 x N1 x K3 (2 x N1 x K3)

Note 1: Applies for RedCap UE of all supporting FR2 power classes.
Note 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 5: The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW.
Note 6: The evaluation shall not be performed across PTW's. In this case the evaluation is performed in the next available PTW.
Note 7: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.

16.1.1.0.4 Minimum conformance requirements for inter-frequency cell re-selection for RedCap UE configured with stationary relaxed measurement criterion

This clause contains the requirements for measurements on inter-frequency NR cells when Srxlev ≤ $S_{IntraSearchP}$ or Squal ≤ $S_{IntraSearchQ}$ and when the UE is configured any of the following relaxed measurement criteria:

- Relaxed measurement criterion for a stationary UE defined in clause 5.2.4.9.3 in 38.304 [30],
- Relaxed measurement criterion for a stationary UE not at cell edge defined in clause 5.2.4.9.4 in 38.304 [30],
- Both low mobility criterion and stationary criterion as defined in clause 5.2.4.9.1 and 5.2.4.9.3 or 5.2.4.9.4 in 38.304 [30] respectively.

The 1 Rx RedCap UE for the evaluation of one or more relaxed measurement criteria defined in clause 5.2.4.9 38.304 [30] applies:

- *s-SearchDeltaP-r16* as the signalled value of *s-SearchDeltaP-r16* [2] - 1 dB.
- *s-SearchDeltaP-Stationary-r17* as the signalled value of *s-SearchDeltaP-Stationary-r17* [2] - 1 dB.
- *s-SearchThresholdP-r16* as the signalled value of *s-SearchThresholdP-r16* [2] + 1 dB.
- *s-SearchThresholdQ-r16* as the signalled value of *s-SearchThresholdQ-r16* [2] + 1 dB.
- *s-SearchThresholdP2-r17* as the signalled value of *s-SearchThresholdP2-r17* [2] + 1 dB.
- *s-SearchThresholdQ2-r17* as the signalled value of *s-SearchThresholdQ2-r17* [2] + 1 dB.

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and UE has fulfilled that criterion, or

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled only the *stationaryMobilityEvaluation* [2] criterion, and

The requirements defined in TS 38.133 [6] in clause 4.2B.2.4 apply for this clause except that:

- $T_{detect,NR_Inter_RedCap_Relax}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

- $T_{measure,NR_Inter_RedCap_Relax}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

- $T_{evaluate,NR_Inter_RedCap_Relax}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

- When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every K2*$T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and, K2 = 240.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.10.2-3 and Table 4.2B.2.10.2-4 are applicable for eDRX cycle up to 10.24 s in FR1 and FR2 respectively.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, then the requirements in Table 4.2B.2.10.2-5 and Table 4.2B.2.10.2-6 respectively apply provided that eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 4.2B.2.10.2-1: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for 1 Rx RedCap UE

DRX cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x 1.5 x K4(36 x 1.5 x K4)	1.28 x 1.5 x K4 (4 x 1.5 x K4)	5.12 x 1.5 x K4 (16 x 1.5 x K4)
0.64	17.92 x K4 (28 x K4)	1.28x K4 (2 x K4)	5.12 x K4 (8 x K4)
1.28	32 x K4 (25 x K4)	1.28x K4 (1 x K4)	6.4 x K4 (5 x K4)
2.56	58.88 x K4 (23 x K4)	2.56 x K4 (1 x K4)	7.68 x K4 (3 x K4)
Note 1: K4 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.			

Table 4.2B.2.10.2-2: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Inter_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_Relax}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x 1.5 x K4 (36 x N1 x 1.5 x K4)	1.28 x N1 x 1.5 x K4 (4 x N1 x 1.5 x K4)	5.12 x N1 x 1.5 x K4 (16 x N1 x 1.5 x K4)
0.64		5	17.92x N1 x K4 (28 x N1 x K4)	1.28 x N1 x K4 (2 x N1 x K4)	5.12 x N1 x K4 (8 x N1 x K4)
1.28		4	32 x N1 x K4 (25 x N1 x K4)	1.28 x N1 x K4 (1 x N1 x K4)	6.4 x N1 x K4 (5 x N1 x K4)
2.56		3	58.88 x N1 x K4 (23 x N1 x K4)	2.56 x N1 x K4 (1 x N1 x K4)	7.68 x N1 x K4 (3 x N1 x K4)
Note 1: Applies for RedCap UE of all supporting power class. Note 2: K4 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.					

Table 4.2B.2.10.2-3: $T_{detect,E\text{-}UTRAN_RedCap_Relax}$, $T_{measure,NR_,E\text{-}UTRAN_RedCap_Relax}$ and $T_{evaluate,NR_,E\text{-}UTRAN_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle

eDRX_IDLE cycle length [s]	$T_{detect,NR_E\text{-}UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_E\text{-}UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_E\text{-}UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)
2.56	58.88 x K3 (23 x K3)	2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)
5.12	117.76 x K3 (23 x K3)	5.12 x K3 (1 x K3)	10.24 x K3 (2 x K3)

Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{detect,\ NR_intra}$ is expected.

Note 2: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

Table 4.2B.2.10.2-4: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle up to 10.24 s

eDRX_IDLE cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)
2.56	58.88 x N1 x K3 (23 x N1 x K3)	2.56 x N1 x K3 (1 x K3)	7.68 x N1 x K3 (3 x N1 x K3)
5.12	117.76 x N1 x K3 (23 x N1 x K3)	5.12 x N1 x K3 (1 x N1 x K3)	10.24 x N1 x K3 (2 x N1 x K3)
10.24	235.52 x N1 x K3 (23 x N1 x K3)	10.24 x N1 x K3 (1 x N1 x K3)	20.48 x N1 x K3 (2 x N1 x K3)

Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

able 4.2B.2.10.2-5: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle larger than 10.24 s

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥[6.4] ([5])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ x K3 (23 x K3)	0.32 x M2 x K3 (1 x M2 x K3)	0.64 x M2 x K3 (2 x M2 x K3)
	0.64	≥[12.8] ([10])		0.64 x K3 (1 x K3)	1.28 x K3 (2 x K3)
	1.28	≥[15.36] ([12])		1.28 x K3 (1 x K3)	2.56 x K3 (2 x K3)
	2.56	≥[30.72] ([4])		2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)

Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs.

Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].

Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Inter_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.

Note 4: K4 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.

Table 4.2B.2.10.2-6: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle larger than 10.24 s

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥30.72 (24)	8	K3 x $eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K3)	0.32 x N1 x K3 (1 x N1 x K3)	0.64 x N1 x K3 (2 x N1 x K3)
	0.64	≥38.4 (30)	5		0.64 x N1 x K3 (1 x N1 x K3)	1.28 x N1 x K3 (2 x N1 x K3)
	1.28	≥61.44 (48)	4		1.28 x N1 x K3 (1 x N1 x K3)	2.56 x N1 x K3 (2 x N1 x K3)
	2.56	≥92.16 (72)	3		2.56 x N1 x K3 (1 x N1 x K3)	5.12 x N1 x K3 (2 x N1 x K3)

Note 1: Applies for RedCap UE of all supporting FR2 power classes.
Note 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Inter_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 5: K4 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.

16.1.1.1 NR SA FR1 Cell reselection for 1 Rx UE

16.1.1.1.1 Test purpose

The purpose of this test is to verify the requirement for the intra frequency NR cell reselection for 1Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.3.

16.1.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 and forward.

16.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.1.1.

16.1.1.1.4 Test description

16.1.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.1.1.4.1-1.

Table 16.1.1.1.4.1-1: Supported test configurations for NR SA FR1 Cell reselection to FR1 intra-frequency NR case for 1 Rx UE

Configuration	Description
16.1.1.1.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.1.1.1.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.1.1.1.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.1.1.1.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 16.1.1.1.4.1-2.

Table 16.1.1.1.4.1-2: Initial conditions for NR SA FR1 Cell reselection to FR1 intra-frequency NR case for 1 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	Without faders. Without LTE link.		

1. The general test parameter settings are set up according to Table 16.1.1.1.4.1-3.
2. Message contents are defined in clause 16.1.1.1.4.3.
3. There is 1 NR carrier, and 2 cells specified in the test. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table 16.1.1.1.4.1-3: General test parameters for intra frequency NR cell re-selection test case for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
T2 end condition	Active cell		1, 2, 3, 4	Cell2	
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2

T2	s	1, 2, 3, 4	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3, 4	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.1.1.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 3 successive time periods, with time duration of T1, T2, and T3 respectively.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Set Cell 2 physical cell identity = initial cell 2 physical cell identity.

2. Set the parameters according to T1 in Table 16.1.1.1.5-1. T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for one iteration of the test procedure loop.

4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 16.1.1.1.5-1. T2 starts.

5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.

6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 34 seconds from the beginning of time period T2, then count a success for the event “Re-select newly detected Cell 2”. Otherwise count a fail for the event “Re-select newly detected Cell 2”.

7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 7a. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 12.

7a The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

8. The SS shall switch the power setting from T2 to T3 as specified in Table 16.1.1.1.5-1. T3 starts.

9. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

10. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 8 seconds from the beginning of time period T3, then count a success for the event “Re-select already detected Cell 1”. Otherwise count a fail for the event “Re-select already detected Cell 1”.

11. If the UE has re-selected Cell 1 within T3, after the re-selection or when T3 expires, continue with step 11a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 12.

11a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.12.
Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 in Cell 1.

13. Repeat step 2-12 until a test verdict has been achieved.
Each of the events “Re-select newly detected Cell 2” and “Re-select already detected Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
If both events pass, the test passes. If one event fails, the test fails.

16.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.1.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 16.1.1.1.4.3-2: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-65	-130 is actual value in dBm (-65 * 2 dBm)	16.1.1.1-1, 16.1.1.1-2
	-64	-128 is actual value in dBm (-64 * 2dBm)	16.1.1.1-3
}			
}			

Table 16.1.1.1.4.3-3: SIB2 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
q-RxLevMin	-65	Actual value is -65*2 = -130dBm	16.1.1.1-1, 16.1.1.1-2
	-64	Actual value is -64*2 = -128dBm	16.1.1.1-3
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		(16.1.1.1-1 OR 16.1.1.1-4) AND Cell 1
	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.6		(16.1.1.1-1 OR 16.1.1.1-4) AND Cell 2
	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		16.1.1.1-2, 16.1.1.1-3
deriveSSB-IndexFromCell	false		16.1.1.1-1
	true		16.1.1.1-2, 16.1.1.1-3
}			
}			

Table 16.1.1.1.4.3-4: *SIB3*: (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB3 ::= SEQUENCE {			
intraFreqNeighCellList SEQUENCE (SIZE (1..maxCellIntra)) OF SEQUENCE {			
IntraFreqNeighCellInfo ::= SEQUENCE{			
q-OffsetCell	dB-1		
}			
}			
}			

16.1.1.1.5 Test requirement

Table 16.1.1.1.5-1 defines the primary level settings including test tolerances for intra frequency NR cell re-selection test case in AWGN for 1 Rx UE.

Table 16.1.1.1.5-1: NR cell specific test parameters for intra frequency NR cell re-selection test case in AWGN for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1			OP.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2, 4	-130			-130		
		3	-127			-127		
Pcompensation	dB	1, 2, 3, 4	0			0		
$Qhyst_s$	dB	1, 2, 3, 4	0			0		
$Qoffset_{s,n}$ Note 4	dB	1, 2, 3, 4	-1			-1		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, , 4	16	-3.55	3.24	-infinity	3.24	-3.55
		2						
		3						
N_{oc} Note2	dBm/SCS	1, 4	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1, 4	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 4	16	13	16.45	-infinity	16.45	13

		2						
		3						
SS-RSRP Note3	dBm/SCS	1, 4	-82	-85	-81.55	-infinity	-81.55	-85
		2	-82	-85	-81.55	-infinity	-81.55	-85
		3	-79	-82	-78.55	-infinity	-78.55	-82
Io	dBm/9.36 MHz	1, 4	-53.94	-51.91	-51.91	Same as parameters specified in Cell 1 columns-		
	dBm/9.36 MHz	2	-53.94	-51.91	-51.91			
	dBm/18.36 MHz	3	-51.02	-48.99	-48.99			
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3, 4	60			60		
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Value modified in Test Tolerance analysis in TS 38.903.

During T2 the cell re-selection delay to a newly detectable cell shall be less than 34 s.

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on Cell 2.

During T3 the cell re-selection delay to an already detected cell shall be less than 8 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 1.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect,NR_Intra_RedCap} + T_{SI\text{-}NR}$, and to an already detected cell can be expressed as: $T_{evaluate,NR_Intra_RedCap} + T_{SI\text{-}NR}$,

Where:

$T_{detect,NR_Intra_RedCap}$See Table 16.1.1.0.1-1 in clause 16.1.1.0.1

$T_{evaluate,NR_Intra_RedCap}$ See Table 16.1.1.0.1-1 in clause 16.1.1.0.1

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 33.28 s, allow 34 s for the cell re-selection delay to a newly detectable cell and 7.68 s for the cell re-selection delay to an already detected cell in the test case, which we allow 8 s.

16.1.1.2 NR SA FR1 Cell reselection for 2 Rx UE

16.1.1.2.1 Test purpose

The purpose of this test is to verify the requirement for the intra frequency NR cell reselection for 2Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.3.

16.1.1.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 and forward.

16.1.1.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.1.2.

16.1.1.2.4 Test description

16.1.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.1.2.4.1-1.

Table 16.1.1.2.4.1-1: Supported test configurations for NR SA FR1 Cell reselection to FR1 intra-frequency NR case for 2 Rx UE

Configuration	Description
16.1.1.2.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.1.1.2.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.1.1.2.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.1.1.2.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 16.1.1.2.4.1-2.

Table 16.1.1.2.4.1-2: Initial conditions for NR SA FR1 Cell reselection to FR1 intra-frequency NR case for 2 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without faders. Without LTE link.		

1. The general test parameter settings are set up according to Table 16.1.1.2.4.1-3.
2. Message contents are defined in clause 16.1.1.2.4.3.
3. There is 1 NR carrier, and 2 cells specified in the test. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table 16.1.1.2.4.1-3: General test parameters for intra frequency NR cell re-selection test case for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
T2 end condition	Active cell		1, 2, 3, 4	Cell2	
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1, , 4	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells

		3	3 μs	Synchronous cells
Access Barring Information	-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration		1, 4	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	Configured in SIB2 of Cell 1
			SMTC.6	Configured in SIB2 of Cell 2
		2	SMTC.1	
		3	SMTC.1	
DRX cycle length	s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3, 4	Not configured	
T1	s	1, 2, 3, 4	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2, 3, 4	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3, 4	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.1.2.4.2 Test procedure

Same test procedure as in 16.1.1.1.4.2, except Table 16.1.1.1.5-1 will be replaced with Table 16.1.1.2.5-1.

16.1.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.1.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 16.1.1.2.4.3-2: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-65	-130 is actual value in dBm (-65 * 2 dBm)	16.1.1.1-1, 16.1.1.1-2
	-64	-128 is actual value in dBm (-64 * 2dBm)	16.1.1.1-3
}			
}			

Table 16.1.1.2.4.3-3: SIB2 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
q-RxLevMin	-65	Actual value is -65*2 = -130dBm	16.1.1.1-1, 16.1.1.1-2
	-64	Actual value is -64*2 = -128dBm	16.1.1.1-3
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		(16.1.1.1-1 OR 16.1.1.1-4) AND Cell 1
	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.6		(16.1.1.1-1 OR 16.1.1.1-4) AND Cell 2
	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		16.1.1.1-2, 16.1.1.1-3
deriveSSB-IndexFromCell	false		16.1.1.1-1
	true		16.1.1.1-2, 16.1.1.1-3
}			
}			

16.1.1.2.5 Test requirement

Table 16.1.1.2.5-1 defines the primary level settings including test tolerances for intra frequency NR cell re-selection test case in AWGN for 2 Rx UE.

Table 16.1.1.2.5-1: NR cell specific test parameters for intra frequency NR cell re-selection test case in AWGN for 2 Rx UE

Parameter	**Unit**	**Test configuration**	**Cell 1**			**Cell 2**		
			T1	**T2**	**T3**	**T1**	**T2**	**T3**
TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1			OP.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		

Qrxlevmin	dBm/SCS	1, 2, 4	-130			-130		
		3	-127			-127		
Pcompensation	dB	1, 2, 3, 4	0			0		
$Qhyst_s$	dB	1, 2, 3	0			0		
$Qoffset_{s,n}$	dB	1, 2, 3, 4	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4	16	-3.55	3.24	-infinity	3.24	-3.55
		2						
		3						
N_{oc} Note2	dBm/SCS	1, 4	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1, 4	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 4	16	13	16.45	-infinity	16.45	13
		2						
		3						
SS-RSRP Note3	dBm/SCS	1, 4	-82	-85	-81.55	-infinity	-81.55	-85
		2	-82	-85	-81.55	-infinity	-81.55	-85
		3	-79	-82	-78.54	-infinity	-78.54	-82
Io	dBm/9.36 MHz	1, 4	-53.94	-51.91	-51.91	Same as parameters specified in Cell 1 columns-		
	dBm/9.36 MHz	2	-53.94	-51.91	-51.91			
	dBm/18.36 MHz	3	-51.01	-48.99	-48.99			
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3, 4	60			60		
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

During T2 the cell re-selection delay to a newly detectable cell shall be less than 34 s.

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on Cell 2.

During T3 the cell re-selection delay to an already detected cell shall be less than 8 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 1.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI\text{-}NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_intra} + T_{SI\text{-}NR}$,

Where:

T_{detect, NR_Intra} See Table 16.1.1.0.1-1 in clause 16.1.1.0.1

$T_{evaluate, NR_intra}$ See Table 16.1.1.0.1-1 in clause 16.1.1.0.1

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 33.28 s, allow 34 s for the cell re-selection delay to a newly detectable cell and 7.68 s for the cell re-selection delay to an already detected cell in the test case, which we allow 8 s.

16.1.1.3 NR SA FR1-FR1 Cell reselection for 1 Rx UE

16.1.1.3.1 Test purpose

The purpose of this test is to verify the requirement for the inter frequency NR cell reselection for 1 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.4.

16.1.1.3.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 and forward.

16.1.1.3.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.1.3.

16.1.1.3.4 Test description

16.1.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.1.3.4.1-1.

Table 16.1.1.3.4.1-1: Supported test configurations for FR1-FR1 Cell reselection for 1 Rx UE

Configuration	Description of serving cell	Description of target cell
16.1.1.3.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.1.1.3.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.1.1.3.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.1.1.3.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.1.1.3.4.1-2.

Table 16.1.1.3.4.1-2: Initial conditions for FR1-FR1 Cell reselection for 1 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.1.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	Without faders. Without LTE link.		

1. The general test parameter settings are set up according to Table 16.1.1.3.4.1-3.
2. Message contents are defined in clause 16.1.1.3.4.3.

3. There are 2 NR carriers, and 2 cells specified in the test. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table 16.1.1.3.4.1-3: General test parameters for FR1-FR1 Cell reselection for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3, 4	Cell 1	
T1 end condition	Active cell		1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3, 4	Cell2	
T3 end condition	Active cell		1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3, 4	Cell 1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	1, 2, 3, 4	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.1.3.4.2 Test procedure

The test consists of one active cell and one neighbour cell. The UE is requested to monitor the neighbouring cell on one of the NR carriers. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

2. Set the parameters according to T1 in Table 16.1.1.3.5-1. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, Cell 1.

4. If the UE responds on lower priority cell, Cell 1 during time duration T1 within 8 seconds from the beginning of time period T1, then count a success for the event “Re-select lower priority Cell 1”. Otherwise count a fail for the event “Re-select lower priority Cell 1”.

5. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 5a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.

5a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 16.1.1.3.5-1. T2 starts. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) shall be changed to ensure Cell 2 is not detected by the UE.

7. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 16.1.1.3.5-1. T3 starts.

8. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, Cell 2.

9. If the UE responds on higher priority cell, Cell 2 during time duration T3 within 68 seconds from the beginning of time period T3, then count a success for the event “Re-select higher priority Cell 2”. Otherwise count a fail for the event “Re-select higher priority Cell 2”.

10. If the UE has re-selected Cell 2 within T3, after the re-selection or when T3 expires, continue with step 10a. Otherwise, if T3 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11.

10a. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

12. Repeat step 2-11 until a test verdict has been achieved.
Each of the events “Re-select lower priority Cell 1” and “Re-select higher priority Cell 2” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
If both events pass, the test passes. If one event fails, the test fails.

16.1.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.1.1.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.2-1 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.2 and Asynchronous cells for configuration 16.1.1.2-1/4 and Cell 1 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.6 and Asynchronous cells for configuration 16.1.1.2-1/4 and Cell 2 Table H.2.2-2 with Condition SSB.1 FR1, SMTC.1 and synchronous cells for configuration 16.1.1.2-2 Table H.2.2-2 with Condition SSB.1 RedCap FR1, SMTC.1 and synchronous cells for configuration 16.1.1.2-3 Table H.2.2-3

Default RRC messages and information elements contents exceptions	

16.1.1.3.5 Test requirement

Table 16.1.1.3.5-1 defines the primary level settings including test tolerances for FR1-FR1 Cell reselection for 1 Rx UE

Table 16.1.1.3.5-1: NR cell specific test parameters for FR1-FR1 Cell reselection for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1			OP.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2, 4	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3, 4	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4	15.6	15.6	15.6	-3.7	-infinity	13.6
		2						
		3						
N_{oc} Note2	dBm/SCS	1, 4	-98	-98	-98	-102	-98	-98
		2	-98	-98	-98	-102	-98	-98
		3	-95	-95	-95	-99	-95	-95
N_{oc} Note2	dBm/15 kHz	1, 4	-98	-98	-98	-102	-98	-98
		2	-98	-98	-98	-102	-98	-98
		3	-98	-98	-98	-102	-99	-98
$\hat{E}_s / N_{oc}$	dB	1, 4	15.6	15.6	15.6	-3.7	-infinity	13.6
		2						
		3						
SS-RSRP Note3	dBm/SCS	1, 4	-82.4	-82.4	-82.4	-105.7	-infinity	-84.4
		2	-82.4	-82.4	-82.4	-105.7	-infinity	-84.4
		3	-79.4	-79.4	-79.4	-102.7	-infinity	-81.4
Io	dBm/9.36 MHz	1, 4	-54.35	-54.35	-54.35	-72.51	-70.05	-56.26
	dBm/9.36 MHz	2	-54.35	-54.35	-54.35	-72.51	-70.05	-56.26
	dBm/18.36 MHz	3	-51.43	-51.43	-51.43	-72.59	-70.13	-56.35
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4	50			50		
$Thresh_{x, highP}$	dB	1, 2, 3, 4	48			48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4	44			44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4	50			50		
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

During T1, The cell re-selection delay to a lower priority cell shall be less than 8 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

During T3, the cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search}$ + $T_{evaluate,NR_Inter_RedCap}$ + $T_{SI\text{-}NR}$, and to a lower priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap}$ + $T_{SI\text{-}NR}$,

Where:

$T_{higher_priority_search}$ See clause 4.2B.2.7 in 38.133

$T_{evaluate,NR_Inter_RedCap}$ See Table 4.2B.2.4-1 in clause 16.1.1.0.2

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

16.1.1.4 NR SA FR1-FR1 Cell reselection for 2 Rx UE

16.1.1.4.1 Test purpose

The purpose of this test is to verify the requirement for the inter frequency NR cell reselection for 2 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.4.

16.1.1.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 and forward.

16.1.1.4.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.1.4.

16.1.1.4.4 Test description

16.1.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.1.4.4.1-1.

Table 16.1.1.4.4.1-1: Supported test configurations for NR SA FR1-FR1 Cell reselection for 2 Rx UE

Configuration	Description of serving cell	Description of target cell

16.1.1.4.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.1.1.4.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.1.1.4.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.1.1.4.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.1.1.4.4.1-2.

Table 16.1.1.4.4.1-2: Initial conditions for FR1-FR1 Cell reselection for 2 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.1.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without faders. Without LTE link.		

1. The general test parameter settings are set up according to Table 16.1.1.4.4.1-3.
2. Message contents are defined in clause 16.1.1.4.4.3.
3. There are 2 NR carriers, and 2 cells specified in the test. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table 16.1.1.4.4.1-3: General test parameters for FR1-FR1 Cell reselection for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3, 4	Cell 1	
T1 end condition	Active cell		1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3, 4	Cell2	
T3 end condition	Active cell		1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3, 4	Cell 1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 µs	Synchronous cells
			3	3 µs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	
			3	SMTC.1	

DRX cycle length	s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3, 4	Not configured	
T1	s	1, 2, 3, 4	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.1.4.4.2 Test procedure

Same test procedure as in 16.1.1.3.4.2 except Table 16.1.1.3.5-1 will be replaced with Table 16.1.1.4.5-1.

16.1.1.4.4.3 Message contents

Same message contents as in 16.1.1.3.4.3.

16.1.1.4.5 Test requirement

Table 16.1.1.4.5-1 defines the primary level settings including test tolerances for FR1-FR1 Cell reselection for 2 Rx UE

Table 16.1.1.4.5-1: NR cell specific test parameters for FR1-FR1 Cell reselection for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1			OP.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2, 4	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3, 4	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s/I_{ot}$	dB	1, 4	15.6	15.6	15.6	-4	-infinity	12
		2						
		3						
	dBm/SCS	1, 4	-98			-100	-98	-98
		2	-98			-100	-98	-98

N_{oc} Note2		3	-95			-97	-95	-95
N_{oc} Note2	dBm/15 kHz	1, 4	-98			-100	-98	-98
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 4	15.60	15.60	15.60	-3.60	-infinity	13.60
		2						
		3						
SS-RSRP Note3	dBm/SCS	1, 4	-82.40	-82.40	-82.40	-103.60	-infinity	-84.40
		2	-82.40	-82.40	-82.40	-103.60	-infinity	-84.40
		3	-79.40	-79.40	-79.40	-100.60	-infinity	-81.40
Io	dBm/9.36 MHz	1, 4	-54.33	-54.33	-54.33	-70.48	-70.05	-56.26
	dBm/9.36 MHz	2	-54.33	-54.33	-54.33	-70.48	-70.05	-56.26
	dBm/18.36 MHz	3	-51.40	-51.40	-51.40	-70.56	-70.13	-56.35
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4	50			50		
$Thresh_{x, highP}$	dB	1, 2, 3, 4	48			48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4	44			44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4	50			50		
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

During T1, The cell re-selection delay to a lower priority cell shall be less than 8 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

During T3, the cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search}$ + $T_{evaluate,NR_Inter_RedCap}$ + $T_{SI\text{-}NR}$, and to a lower priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap}$ + $T_{SI\text{-}NR}$,

Where:

$T_{higher_priority_search}$ See clause 4.2B.2.7 in 38.133

$T_{evaluate,NR_Inter_RedCap}$ See Table 4.2B.2.4-1 in clause 16.1.1.0.2

$T_{SI\text{-}NR}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

16.1.1.5 NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

16.1.1.5.1 Test purpose

The purpose of this test is to verify the requirement for the intra frequency NR cell reselection requirements for UE fulfilling stationary relaxed measurement criterion. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.9.2.

16.1.1.5.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 and forward supporting Rel.17 stationary idle mode relaxed measurement criterion.

16.1.1.5.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.1.5.

16.1.1.5.4 Test description

16.1.1.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.1.5.4.1-1.

Table 16.1.1.5.4.1-1: Supported test configurations for NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Configuration	Description
16.1.1.5.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.1.1.5.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.1.1.5.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.1.1.5.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 16.1.1.5.4.1-2.

Table 16.1.1.5.4.1-2: Initial conditions for NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.1.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	Without faders. Without LTE link.		

1. The general test parameter settings are set up according to Table 16.1.1.5.4.1-3.
2. Message contents are defined in clause 16.1.1.5.4.3.
3. There is 1 NR carrier, and 2 cells specified in the test. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table 16.1.1.5.4.1-3: General test parameters for NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3, 4	Cell2	
T1 end condition	Active cell		1, 2, 3, 4	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	32	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4	32	T2 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.1.5.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 2 successive time periods, with time duration of T1, and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. *stationaryMobilityEvaluation-r17* is provided in SIB2 of Cell 1 and Cell 2. Set Cell 2 physical cell identity = initial cell 2 physical cell identity.

2. Set the parameters according to T2 in Table 16.1.1.5.5-1. Then wait 113s to ensure that Cell 2 has been detected by the UE.
3. Set the parameters according to T1 in Table 16.1.1.5.5-1. T1 starts.
4. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 2.
5. If the UE responds on Cell 2 within 32 seconds from the beginning of time period T1, then count a success for the event “Re-select Cell 2”. Otherwise count a fail for the event “Re-select Cell 2”.
6. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 7. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, skip to step 13.
7. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.
8. The SS shall switch the power setting from T1 to T2 as specified in Table 16.1.1.53.5-1. T2 starts.
9. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.
10. If the UE responds on Cell 1 within 32 seconds from the beginning of time period T2, then count a success for the event “Re-select Cell 1”. Otherwise count a fail for the event “Re-select Cell 1”.
11. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 12. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, skip to step 13.
12. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1. Skip to step 14.
13. The SS shall power OFF/ON the UE, then proceed with step 1.
14. Repeat step 3-11 until a test verdict has been achieved. Each of the events “Re-select Cell 2” and “Re-select Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

16.1.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.1.1.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 16.1.1.5.4.3-2: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-69	-137 is actual value in dBm (-69 * 2+1 dBm)	Config 16.1.1.5.1-3
}			
servingCellConfigCommon SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
pcch-Config SEQUENCE {			
defaultPagingCycle	rf64		

}			
}			
}			
}			

Table 16.1.1.5.4.3-3: SIB2 (Cell 1)

Derivation Path: Table H.2.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		16.1.1.5-1, 16.1.1.5-4
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		16.1.1.5-2, 16.1.1.5-3
deriveSSB-IndexFromCell	false		16.1.1.5-1, 16.1.1.5-4
	true		16.1.1.5-2, 16.1.1.5-3
}			
relaxedMeasurement-r16	Not present		
cellEquivalentSize-r17	Not present		
relaxedMeasurement-r17 SEQUENCE {			
stationaryMobilityEvaluation-r17 SEQUENCE {			
s-SearchDeltaP-Stationary-r17	dB6		16.1.1.5.5-1
t-SearchDeltaP-Stationary-r17	s5		
}			
cellEdgeEvaluationWhileStationary-r17	Not present		
combineRelaxedMeasCondition2-r17	Not present		
}			
}			

Table 16.1.1.5.4.3-4: SIB2 (Cell 2)

Derivation Path: Table H.2.1-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
s-IntraSearchP	31	Actal value = 31 * 2 = 62 dB	
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.6		16.1.1.5-1, 16.1.1.5-4
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		16.1.1.5-2, 6.1.1.3-3
deriveSSB-IndexFromCell	false		16.1.1.5-1
	true		16.1.1.5-2, 6.1.1.3-3
}			
relaxedMeasurement-r16	Not present		
cellEquivalentSize-r17	Not present		
relaxedMeasurement-r17 SEQUENCE {			
stationaryMobilityEvaluation-r17 SEQUENCE {			
s-SearchDeltaP-Stationary-r17	dB6		16.1.1.5.5-1
t-SearchDeltaP-Stationary-r17	s5		
}			
cellEdgeEvaluationWhileStationary-r17	Not present		
combineRelaxedMeasCondition2-r17	Not present		
}			
}			

Table 16.1.1.5.4.3-5: *SIB3*

Derivation Path: TS 38.508-1 [14], Table 4.6.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB3 ::= SEQUENCE {			
intraFreqNeighCellList SEQUENCE (SIZE (1..maxCellIntra)) OF SEQUENCE {			
IntraFreqNeighCellInfo ::= SEQUENCE{			
physCellId	Set according to the neighbour cell PCI		
q-OffsetCell	dB-1		
}			
}			
}			

16.1.1.5.5 Test requirement

Table 16.1.1.5.5-1 defines the primary level settings including test tolerances for FR1-FR1 Cell reselection for 2 Rx UE

Table 16.1.1.5.5-1: NR cell specific test parameters for NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3, 4	OP.1		OP.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3, 4	0		0	
$Qhyst_s$	dB	1, 2, 3, 4	0		0	
$Qoffset_{s,n}$ Note4	dB	1, 2, 3, 4	-1		-1	
$S_{SearchDeltaP-Stationary}$ Note4	dB	1, 2, 3, 4	6		6	
$T_{SearchDeltaP-Stationary}$	s	1, 2, 3, 4	5		5	
Cell_selection_and_ reselection_quality_ measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1, 2, 3, 4	-3.55	3.24	3.24	-3.55

N_{oc} Note2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1, 2, 3, 4	-98			
$\hat{E}_s / N_{oc}$	dB	1, 2, 3, 4	13	16.45	16.45	13
SS-RSRP Note3	dBm/SCS	1, 4	-85	-81.55	-81.55	-85
		2	-85	-81.55	-81.55	-85
		3	-82	-78.55	-78.55	-82
Io	dBm/9.36 MHz	1, 4	-52.56	-51.91	specified in Cell 1 columns-	
	dBm/9.36 MHz	2	-52.56	-51.91		
	dBm/18.36 MHz	3	-49.64	-48.99		
Treselection	s	1, 2, 3, 4	0	0	0	0
SintrasearchP Note4	dB	1, 2, 3, 4	62		62	
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Value modified in Test Tolerance analysis in TS 38.903.

During T1, the cell re-selection delay to an already detected cell shall be less than 32 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

During T2, the cell re-selection delay to an already detected cell shall be less than 32 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{evaluate,NR_Intra_RedCap_Relax} + T_{SI-NR}$,

Where:

$T_{evaluate,NR_Intra_RedCap_Relax}$ See Table 4.2B.2.9.2-1 in clause 16.1.1.0.3 for reselection to Cell 2 during T1 with UE fulfilling stationary criterion, 30.72 s.

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected cell for UE fulfilling stationary criterion in the test case.

16.1.1.6 NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

16.1.1.6.1 Test purpose

The purpose of this test is to verify the requirement for the intra frequency NR cell reselection requirements for UE fulfilling stationary relaxed measurement criterion. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.9.2.

16.1.1.6.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 and forward supporting Rel.17 stationary idle mode relaxed measurement criterion.

16.1.1.6.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.1.6.

16.1.1.6.4 Test description

16.1.1.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.1.6.4.1-1.

Table 16.1.1.6.4.1-1: Supported test configurations for NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Configuration	Description
16.1.1.6.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.1.1.6.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.1.1.6.1-3	30 kHz SSB SCS, 20MHz bandwidth, TDD duplex mode
16.1.1.6.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 16.1.1.6.4.1-2.

Table 16.1.1.6.4.1-2: Initial conditions for NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.1.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without faders. Without LTE link.		

1. The general test parameter settings are set up according to Table 16.1.1.6.4.1-3.
2. Message contents are defined in clause 16.1.1.6.4.3.
3. There is 1 NR carrier, and 2 cells specified in the test. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table 16.1.1.6.4.1-3: General test parameters for NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3, 4	Cell2	
T1 end condition	Active cell		1, 2, 3, 4	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	32	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4	32	T2 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.1.6.4.2 Test procedure

Same test procedure as in 16.1.1.5.4.2.

16.1.1.6.4.3 Message contents

Same message content as in 16.1.1.5.4.3 with the following exceptions:

- Table 16.1.1.5.4.3-5 is replaced by Table 16.1.1.6.4.3-1.

Table 16.1.1.6.4.3-1: *SIB3*

Derivation Path: TS 38.508-1 [14], Table 4.6.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB3 ::= SEQUENCE {			

intraFreqNeighCellList SEQUENCE (SIZE (1..maxCellIntra)) OF SEQUENCE {			
IntraFreqNeighCellInfo ::= SEQUENCE{			
physCellId	Set according to the neighbour cell PCI		
q-OffsetCell	dB0		
}			
}			
}			

16.1.1.6.5 Test requirement

Table 16.1.1.6.5-1 defines the primary level settings including test tolerances for FR1-FR1 Cell reselection for 2 Rx UE

Table 16.1.1.6.5-1: NR cell specific test parameters for NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3, 4	OP.1		OP.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3, 4	0		0	
$Qhyst_s$	dB	1, 2, 3, 4	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3, 4	0		0	
$S_{SearchDeltaP-Stationary}$ Note4	dB	1, 2, 3, 4	6		6	
$T_{SearchDeltaP-Stationary}$	s	1, 2, 3, 4	5		5	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1, 2, 3, 4	-3.56	3.22	3.22	-3.56
N_{oc} Note2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			

N_{oc} Note2	dBm/15 kHz	1, 2, 3, 4	-98			
$\hat{E}_s / N_{oc}$	dB	1, 2, 3, 4	12.55	16	16	12.55
SS-RSRP Note3	dBm/SCS	1, 4	-85.45	-82	-82	-85.45
		2	-85.45	-82	-82	-85.45
		3	-82.45	-79	-79	-82.45
Io	dBm/9.36 MHz	1, 4	-52.44	-52.44	specified in Cell 1 columns-	
	dBm/9.36 MHz	2	-52.44	-52.44		
	dBm/18.36 MHz	3	-49.43	-49. 43		
Treselection	s	1, 2, 3, 4	0	0	0	0
SintrasearchP	dB	1, 2, 3, 4	60		60	
Propagation Condition		1, 2, 3, 4	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SSearchDeltaP includes Test Tolerance applied to fulfil the low mobility criterion.						

During T1, the cell re-selection delay to an already detected cell shall be less than 32 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

During T2, the cell re-selection delay to an already detected cell shall be less than 32 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{evaluate,NR_Intra_RedCap_Relax} + T_{SI-NR}$,

Where:

$T_{evaluate,NR_Intra_RedCap_Relax}$ See Table 4.2B.2.9.2-2 in clause 16.1.1.0.3 for reselection to Cell 2 during T1 with UE fulfilling stationary criterion, 30.72 s.

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected cell for UE fulfilling stationary criterion in the test case.

16.1.1.7 NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

16.1.1.7.1 Test purpose

The purpose of this test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling stationary relaxed measurement criterion. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.10.2.

16.1.1.7.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 and forward supporting Rel.17 stationary idle mode relaxed measurement criterion.

16.1.1.7.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.1.7.

16.1.1.7.4 Test description

16.1.1.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.1.7.4.1-1.

Table 16.1.1.7.4.1-1: Supported test configurations for NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Configuration	Description of serving cell	Description of target cell
16.1.1.7.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.1.1.7.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.1.1.7.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.1.1.7.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.1.1.7.4.1-2.

Table 16.1.1.7.4.1-2: Initial conditions for NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.1.1.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	Without faders. Without LTE link.		

1. The general test parameter settings are set up according to Table 16.1.1.7.4.1-3.
2. Message contents are defined in clause 16.1.1.7.4.3.
3. There is 1 NR carrier, and 2 cells specified in the test. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 1.

Table 16.1.1.7.4.1-3: General test parameters for NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
	Active cell		1, 2, 3, 4	Cell2	

Initial condition	Neighbour cells		1, 2, 3, 4	Cell1	The UE camps on cell 2 in the initial phase, it fulfils stationary relaxation measurements criterion, and during T1 period the UE reselects to cell 1
T1 end condition	Active cell		1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3, 4	Cell2	
T2 end condition	Active cell		1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3, 4	Cell1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB Configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	32	T1 is defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4	32	T2 is defined so that cell re-selection reaction time is taken into account.

16.1.1.7.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR Cell 1 and Cell 2 on different frequencies. The test consists of 2 successive time periods, with time duration of T1, and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test, and cell parameters are set according to T2. Cell 1 and cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 1.

In the following test procedure "UE responds" means "UE starts transmitting preamble on PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility.

1. Power on Cell 2 and set the its parameters according to T2 in Table 16.1.1.7.5-1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2. Then power on Cell 1 and set its parameters according to T2 in Table 16.1.1.7.5-1. SIB2 of Cell 1 and Cell 2 are configured as in 16.1.1.7.4.3. Set Cell 2 physical cell identity = initial cell 2 physical cell identity.

2. Wait 113s to ensure that Cell 1 has been detected by the UE.

3. Set the parameters according to T1 in Table 16.1.1.7.5-1. T1 starts.

4. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.

5. If the UE responds on Cell 1 within 32 seconds from the beginning of time period T1, then count a success for the event “Re-select Cell 1”. Otherwise count a fail for the event “Re-select Cell 1”.

6. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, skip to step 13.

7. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

8. The SS shall switch the power setting from T1 to T2 as specified in Table 16.1.1.7.5-1. T2 starts.
9. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 2.
10. If the UE responds on Cell 2 within 32 seconds from the beginning of time period T2, then count a success for the event “Re-select Cell 2”. Otherwise count a fail for the event “Re-select Cell 2”.
11. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 11. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, skip to step 13.
12. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2. skip to 14.
13. The SS shall power OFF/ON the UE, then proceed with step 1.
14. Repeat step 3-11 until a test verdict has been achieved. Each of the events “Re-select Cell 2” and “Re-select Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict. If both events pass, the test passes. If one event fails, the test fails.

16.1.1.7.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.1.1.7.4.3-1: SIB1 (Cell 1 and Cell 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
servingCellConfigCommon SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
pcch-Config SEQUENCE {			
defaultPagingCycle	rf64		
}			
}			
}			
}			

Table 16.1.1.7.4.3-2: SIB2 (Cell 1)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
threshServingLowP	22	Actual value = 22*2 = 44dB	
}			
relaxedMeasurement-r16	Not present		
cellEquivalentSize-r17	Not present		
relaxedMeasurement-r17 SEQUENCE {			
stationaryMobilityEvaluation-r17 SEQUENCE {			
s-SearchDeltaP-Stationary-r17	dB3		
t-SearchDeltaP-Stationary-r17	s5		
}			
cellEdgeEvaluationWhileStationary-r17	Not present		
combineRelaxedMeasCondition2-r17	Not present		
}			
}			

Table 16.1.1.7.4.3-3: SIB2 (Cell 2)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**

SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
threshServingLowP	23	Actual value = 23*2 = 46dB	Cell 2
}			
relaxedMeasurement-r16	Not present		
cellEquivalentSize-r17	Not present		
relaxedMeasurement-r17 SEQUENCE {			
stationaryMobilityEvaluation-r17 SEQUENCE {			
s-SearchDeltaP-Stationary-r17	dB15		Cell 2
t-SearchDeltaP-Stationary-r17	s5		
}			
cellEdgeEvaluationWhileStationary-r17	Not present		
combineRelaxedMeasCondition2-r17	Not present		
}			
}			

Table 16.1.1.7.4.3-4: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 2		
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		16.1.1.7-1, 16.1.1.7-4
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		16.1.1.7-2, 16.1.1.7-3
deriveSSB-IndexFromCell	false		16.1.1.7-1, 16.1.1.7-4
	true		16.1.1.7-2, 16.1.1.7-3
threshX-HighP	24	Actual value = 24*2 = 48dB	
threshX-LowP	24	Actual value = 25*2 = 50dB	
cellReselectionPriority	5	Same as the priority in SIB 2 of Cell 2.	
}			
}			
}			

Table 16.1.1.7.4.3-5: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 1 SSB		Cell 2
smtc	SSB-MTC specified in 38.508-1 [14] Table		16.1.1.7-1, 16.1.1.7-4

	7.3.1-3 with condition SMTC.6		
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		16.1.1.7-2, 16.1.1.7-3
deriveSSB-IndexFromCell	false		16.1.1.7-1, 16.1.1.7-4
	true		16.1.1.7-2, 16.1.1.7-3
threshX-HighP	22	Actual value = 22*2 = 44dB	Cell 2
threshX-LowP	25	Actual value = 25*2 = 50dB	Cell 2
cellReselectionPriority	4	Same as the priority in SIB 2 of Cell 1.	Cell 2
}			
}			
}			

16.1.1.7.5 Test requirement

Table 16.1.1.7.5-1 defines the primary level settings including test tolerances for FR1-FR1 Cell reselection for 2 Rx UE

Table 16.1.1.7.5-1: NR cell specific test parameters for NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3, 4	OP.1		OP.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3, 4	0		0	
$Qhyst_s$	dB	1, 2, 3, 4	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3, 4	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	1, 4	14	14	-3.7	9.75
		2				
		3				
N_{oc} Note2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	14	14	-3.7	9.75
		2				
		3				
SS-RSRP Note3	dBm/SCS	1, 4	-84	-84	-101.7	-88.25
		2	-84	-84	-101.7	-88.25
		3	-81	-81	-98.7	-85.25
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88	-68.51	-59.86
	dBm/9.36 MHz	2	-55.88	-55.88	-68.51	-59.86
	dBm/18.36 MHz	3	-52.96	-52.96	65.58	-56.93
Treselection	s	1, 2, 3, 4	0	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4	Not sent		Not sent	
$Thresh_{x, highP}$ Note 4	dB	1, 2, 3, 4	48		44	
$Thresh_{serving, lowP}$ Note 4	dB	1, 2, 3, 4	44		46	
$Thresh_{x, lowP}$ Note 4	dB	1, 2, 3, 4	48		50	
$S_{SearchDeltaP-Stationary}$ Note 4	dB	1, 2, 3	3		15	

$T_{SearchDeltaP-Stationary}$	s	1, 2, 3	5	5
Propagation Condition		1, 2, 3	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Value modified in Test Tolerance analysis in TS 38.903.

During T1, the cell re-selection delay to a lower priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The cell reselection delay to an already detected lower priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

During T2, the cell re-selection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Tracking Area Update procedure on cell 2.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The cell re-selection delay to a known lower priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap_Relax} + T_{SI-NR}$,

Where:

$T_{evaluate,NR_Inter_RedCap_Relax}$ See Table 4.2B.2.10.2-1 in clause 16.1.1.0.4

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected lower priority cell and 32 s for the cell re-selection delay to an already detected higher priority cell, for UE fulfilling stationary relaxed measurements in the test case.

16.1.1.8 NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

16.1.1.8.1 Test purpose

The purpose of this test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling stationary relaxed measurement criterion. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.10.2.

16.1.1.8.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 and forward supporting Rel.17 stationary idle mode relaxed measurement criterion.

16.1.1.8.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.1.8.

16.1.1.8.4 Test description

16.1.1.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.1.8.4.1-1.

Table 16.1.1.8.4.1-1: Supported test configurations for NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Configuration	Description of serving cell	Description of target cell
16.1.1.8.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.1.1.8.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.1.1.8.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.1.1.8.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.1.1.8.4.1-2.

Table 16.1.1.8.4.1-2: Initial conditions for NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.1.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without faders. Without LTE link.		

1. The general test parameter settings are set up according to Table 16.1.1.8.4.1-3.
2. Message contents are defined in clause 16.1.1.8.4.3.
3. There are 2 NR carriers, and 2 cells specified in the test. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 1.

Table 16.1.1.8.4.1-3: General test parameters for NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell2	The UE camps on cell 2 in the initial phase, it fulfils stationary relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2, 3, 4	Cell1	
T1 end condition	Active cell		1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3, 4	Cell2	
T2 end condition	Active cell		1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3, 4	Cell1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells

		2	3 µs	Synchronous cells
		3	3 µs	Synchronous cells
Access Barring Information	-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB Configuration		1, 4	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	Configured in SIB4 of Cell 1
			SMTC.6	Configured in SIB4 of Cell 2
		2	SMTC.1	
		3	SMTC.1	
DRX cycle length	s	1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3, 4	Not configured	
T1	s	1, 2, 3, 4	32	T1 is defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4	32	T2 is defined so that cell re-selection reaction time is taken into account.

16.1.1.8.4.2 Test procedure

Same test procedure as in 16.1.1.7.4.2.

16.1.1.8.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.1.1.8.4.3-1: SIB1 (Cell 1 and Cell 2)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
servingCellConfigCommon SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
pcch-Config SEQUENCE {			
defaultPagingCycle	rf64		
}			
}			
}			
}			

Table 16.1.1.8.4.3-2: SIB2 (Cell 1)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
threshServingLowP	22	Actual value = 22*2 = 44dB	
}			
cellEquivalentSize-r17	Not present		
relaxedMeasurement-r17 SEQUENCE {			
stationaryMobilityEvaluation-r17 SEQUENCE {			
s-SearchDeltaP-Stationary-r17	dB3		
t-SearchDeltaP-Stationary-r17	s5		
}			
cellEdgeEvaluationWhileStationary-r17	Not present		

combineRelaxedMeasCondition2-r17	Not present		
}			
}			

Table 16.1.1.8.4.3-3: SIB2 (Cell 2)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present		
threshServingLowP	23	Actual value = 23*2 = 46dB	Cell 2
}			
cellEquivalentSize-r17	Not present		
relaxedMeasurement-r17 SEQUENCE {			
stationaryMobilityEvaluation-r17 SEQUENCE {			
s-SearchDeltaP-Stationary-r17	dB15		Cell 2
t-SearchDeltaP-Stationary-r17	s5		
}			
cellEdgeEvaluationWhileStationary-r17	Not present		
combineRelaxedMeasCondition2-r17	Not present		
}			
}			

Table 16.1.1.8.4.3-4: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 2		
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		16.1.1.8-1, 16.1.1.8-4
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		16.1.1.8-2, 16.1.1.8-3
deriveSSB-IndexFromCell	false		16.1.1.8-1, 16.1.1.8-4
	true		16.1.1.8-2, 16.1.1.8-3
threshX-HighP	24	Actual value = 24*2 = 48dB	
threshX-LowP	24	Actual value = 24*2 = 48dB	
cellReselectionPriority	5	Same as the priority in SIB 2 of Cell 2.	
}			
}			
}			

Table 16.1.1.8.4.3-5: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			

interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		entry 1	
dl-CarrierFreq	ARFCN-ValueNR for Cell 1 SSB		Cell 2
smtc	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.6		16.1.1.8-1, 16.1.1.8-4
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		16.1.1.8-2, 16.1.1.8-3
deriveSSB-IndexFromCell	false		16.1.1.8-1, 16.1.1.8-4
	true		16.1.1.8-2, 16.1.1.8-3
threshX-HighP	22	Actual value = 22*2 = 44dB	Cell 2
threshX-LowP	25	Actual value = 25*2 = 50dB	Cell 2
cellReselectionPriority	4	Same as the priority in SIB 2 of Cell 1.	Cell 2
}			
}			
}			

16.1.1.8.5 Test requirement

Table 16.1.1.8.5-1 defines the primary level settings including test tolerances for FR1-FR1 Cell reselection for 2 Rx UE

Table 16.1.1.8.5-1: NR cell specific test parameters for NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3, 4	OP.1		OP.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3, 4	0		0	
$Qhyst_s$	dB	1, 2, 3, 4	0		0	
$Qoffset_{s,n}$	dB	1, 2, 3, 4	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	1, 4	14	14	-3.7	9.75
		2				
		3				
N_{oc} Note2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	14	14	-3.70	9.75
		2				
		3				
SS-RSRP Note3	dBm/SCS	1, 4	-84	-84	-101.70	-88.25
		2	-84	-84	-101.70	-88.25
		3	-81	-81	-98.7	-85.25
Io	dBm/9.36 MHz	1, 4	-55.96	-55.96	-68.60	-59.95
	dBm/9.36 MHz	2	-55.96	-55.96	-68.60	-59.95
	dBm/18.36 MHz	3	-52.95	-52.95	-65.58	-56.93
Treselection	s	1, 2, 3, 4	0	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4	Not sent		Not sent	
$Thresh_{x,highP}$ Note 4	dB	1, 2, 3, 4	48		44	
$Thresh_{serving,lowP}$ Note 4	dB	1, 2, 3, 4	44		46	
$Thresh_{x,lowP}$ Note 4	dB	1, 2, 3, 4	48		50	
$S_{SearchDeltaP-Stationary}$ Note 4	dB	1, 2, 3	3		15	

$T_{SearchDeltaP-Stationary}$	s	1, 2, 3	5	5
Propagation Condition		1, 2, 3	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Thresholds include Test Tolerance applied to fulfil the cell re-selection criterion.

During T1, the cell re-selection delay to a lower priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The cell reselection delay to an already detected lower priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

During T2, the cell re-selection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Tracking Area Update procedure on cell 2.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The cell re-selection delay to a known lower priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap_Relax}$ + T_{SI-NR},

Where:

$T_{evaluate,NR_Inter_RedCap_Relax}$ See Table 4.2B.2.10.2-2 in clause 16.1.1.0.4

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected lower priority cell and 32 s for the cell re-selection delay to an already detected higher priority cell, for UE fulfilling stationary relaxed measurements in the test case.

16.1.2 NR – E-UTRA cell re-selection for RedCap

16.1.2.0 Minimum conformance requirements

16.1.2.0.1 Minimum conformance requirements for NR SA FR1 - E-UTRA cell re-selection for 1 Rx

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-RAT E-UTRAN layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 38.133 [6] in clause 4.2B.2.7.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-RAT E-UTRAN layers of higher, lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT E-UTRAN layers shall be the same as that defined below for lower priority RATs.

The requirements in this clause apply for inter-RAT E-UTRAN FDD measurements and E-UTRA TDD measurements. When the measurement rules indicate that inter-RAT E-UTRAN cells are to be measured, the UE shall measure RSRP

and RSRQ of detected E-UTRA cells in the neighbour frequency list at the minimum measurement rate specified in this clause.

The parameter $N_{EUTRA_carrier_RedCap}$ is the total number of configured E-UTRA carriers in the neighbour frequency list. The UE shall filter RSRP and RSRQ measurements of each measured E-UTRA cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,EUTRAN_RedCap}/2$.

An inter-RAT E-UTRA cell is considered to be detectable provided the following conditions are fulfilled:

- the same conditions as for inter-frequency RSRP measurements specified in TS 36.133 [15, Annex B.x.y] are fulfilled for a corresponding Band, and
- the same conditions as for inter-frequency RSRQ measurements specified in TS 36.133 [15, Annex B.x.y] are fulfilled for a corresponding Band.
- SCH conditions specified in TS 36.133 [15, Annex B.x.y] are fulfilled for a corresponding Band

The UE shall be able to evaluate whether a newly detectable inter-RAT E-UTRAN cell meets the reselection criteria defined in TS38.304 [30] within $(N_{EUTRA_carrier_RedCap}) * T_{detect,EUTRAN_RedCap}$ when $Srxlev \leq S_{nonIntraSearchP}$ or $Squal \leq S_{nonIntraSearchQ}$ when $T_{reselection} = 0$ provided that the reselection criteria are met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities for 2 Rx RedCap and at least [6dB] for RSRP reselections based on absolute priorities or [4dB] for RSRQ reselections based on absolute priorities for 1 Rx RedCap.

Cells which have been detected shall be measured at least every $(N_{EUTRA_carrier_RedCap}) * T_{measure,EUTRAN_RedCap}$ when $Srxlev \leq S_{nonIntraSearchP}$ or $Squal \leq S_{nonIntraSearchQ}$.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,EUTRAN_RedCap}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell.

If the UE detects on an inter-RAT E-UTRAN carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall not consider an inter-RAT E-UTRA cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For a cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified inter-RAT E-UTRA cell has met reselection criterion defined in TS 38.304 [30] within $(N_{EUTRA_carrier_RedCap}) * T_{evaluate,EUTRAN_RedCap}$ when $T_{reselection} = 0$ provided that the reselection criteria are met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities for 2 Rx RedCap and at least [6dB] for RSRP reselections based on absolute priorities or [4dB] for RSRQ reselections based on absolute priorities for 1 Rx RedCap.

If $T_{reselection}$ timer has a non-zero value and the inter-RAT E-UTRA cell is satisfied with the reselection criteria which are defined in TS 38.304 [1], the UE shall evaluate this E-UTRA cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

For 1 Rx RedCap and 2 Rx RedCap not configured with eDRX_IDLE cycle, $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$ and $T_{evaluate,\ E\text{-}UTRAN_RedCap}$ are specified in Table 16.1.2.0.1-1.

For 1 Rx RedCap and 2 Rx RedCap configured with eDRX_IDLE cycle, $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$ and $T_{evaluate,\ E\text{-}UTRAN_RedCap}$ are specified in Table 16.1.2.0.1-2, where the requirements apply provided that the serving cell is configured with eDRX_IDLE and is the same in all PTWs during any of $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$ and $T_{evaluate,\ E\text{-}UTRAN_RedCap}$ when multiple PTWs are used.

Table 16.1.2.0.1-1: $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$, and $T_{evaluate,EUTRAN_RedCap}$ for 1 Rx RedCap

DRX cycle length [s]	$T_{detect,EUTRAN}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN}$ [s] (number of DRX cycles)
0.32	11.52 (36)	1.28 (4)	5.12 (16)
0.64	17.92 (28)	1.28 (2)	5.12 (8)
1.28	32(25)	1.28 (1)	6.4 (5)
2.56	58.88 (23)	2.56 (1)	7.68 (3)

Table 16.1.2.0.1-2: $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$, and $T_{evaluate,EUTRAN_RedCap}$ for UE configured with eDRX_IDLE cycle

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,EUTRAN_RedCap}$ [s] (number of DRX or eDRX cycles Note 3)	$T_{measure,EUTRAN_RedCap}$ [s] (number of DRX or eDRX cycles Note 3)	$T_{evaluate,E-UTRAN_RedCap}$ [s] (number of DRX or eDRX cycles Note 3)
2.56	N/A	N/A	58.88 (23)	2.56 (1)	7.68 (3)
5.12	N/A	N/A	117.76 (23)	5.12 (1)	10.24 (2)
10.24	N/A	N/A	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥1.28 (1)	$eDRX_cycle_length \times \left\lceil \frac{23}{\lceil PTW / DRX_cycle_length \rceil} \right\rceil$ (23)	0.32 (1)	0.64 (2)
	0.64	≥1.28 (1)		0.64 (1)	1.28 (2)
	1.28	≥2.56 (2)		1.28 (1)	2.56 (2)
	2.56	≥5.12 (4)		2.56 (1)	5.12 (2)

NOTE 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 5.12s, number of DRX cycles otherwise.
NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,E-UTRAN_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.
NOTE 5: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, being configured with eDRX_IDLE cycle, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

16.1.2.0.2 Minimum conformance requirements for NR SA FR1 - E-UTRA cell re-selection for 2 Rx

Same Minimum conformance requirements as in clause 16.1.2.0.1.

16.1.2.0.3 Minimum conformance requirements for NR SA FR1 - E-UTRA cell re-selection

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and UE has fulfilled that criterion, or
- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled only the *stationaryMobilityEvaluation* [2] criterion, and

The requirements defined in TS 38.133 [6] clause 4.2B.2.5 apply for this clause except that:

- $T_{detect,EUTRAN_RedCap\ Relax}$ as specified in Table 16.1.2.0.3-1 and Table 16.1.2.0.3-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

- $T_{measure,EUTRAN\ RedCap\ Relax}$ as specified in Table 16.1.2.0.3-1 and Table 16.1.2.0.3-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

- $T_{evaluate,EUTRAN\ RedCap\ Relax}$ as specified in Table 16.1.2.0.3-1 and Table 16.1.2.0.3-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 16.1.2.0.3-3 are applicable for eDRX cycle < 10.24 s.

If the UE is configured with eDRX_IDLE cycle ≥ 10.24 s, then the requirements in Table 16.1.2.0.3-4 apply provided that filtering of a measurement is done within a single PTW and provided that the eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 16.1.2.0.3-1: $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$, and $T_{evaluate,EUTRAN_RedCap_Relax}$ for 1 Rx RedCap

DRX cycle length [s]	$T_{detect,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x K5 (36 x K5)	1.28 x K5 (4 x K5)	5.12 x K5 (16 x K5)
0.64	17.92 x K5 (28 x K5)	1.28 x K5 (2 x K5)	5.12 x K5 (8 x K5)
1.28	32 x K5 (25 x K5)	1.28 x K5 (1 x K5)	6.4 x K5 (5 x K5)
2.56	58.88 x K5 (23 x K5)	2.56 x K5 (1 x K5)	7.68 x K5 (3 x K5)
Note 1: K5 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.			

Table 16.1.2.0.3-2: $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$, and $T_{evaluate,EUTRAN_Relax}$ for 2 Rx RedCap

DRX cycle length [s]	$T_{detect,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_Relax}$ [s] (number of DRX cycles)
0.32	11.52 x K5 (36 x K5)	1.28 x K5 (4 x K5)	5.12 x K5 (16 x K5)
0.64	17.92 x K5 (28 x K5)	1.28 x K5 (2 x K5)	5.12 x K5 (8 x K5)
1.28	32 x K5 (25 x K5)	1.28 x K5 (1 x K5)	6.4 x K5 (5 x K5)
2.56	58.88 x K5 (23 x K5)	2.56 x K5 (1 x K5)	7.68 x K5 (3 x K5)

Table 16.1.2.0.3-3: $T_{detect,E\text{-}UTRAN\ _RedCap_Relax}$, $T_{measure,NR_,E\text{-}UTRAN\ _RedCap_Relax}$ and $T_{evaluate,NR_,E\text{-}UTRAN\ _RedCap_Relax}$ for UE configured with eDRX_IDLE cycle

eDRX_IDLE cycle length [s]	$T_{detect,NR_E\text{-}UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_E\text{-}UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_E\text{-}UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)
5.12	117.76 x K3 (23 x K3)	5.12 x K3 (1 x K3)	10.24 x K3 (2 x K3)

Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{detect,\ NR_intra}$ is expected.

Note 2: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

Table 16.1.2.0.3-4: $T_{detect,E-UTRAN_RedCap_Relax}$, $T_{measure,NR_,E-UTRAN_RedCap_Relax}$ and $T_{evaluate,NR_,E-UTRAN_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,EUTRAN_RedCap_Relax}$ [s] (number of DRX or eDRX cycles Note 3)	$T_{measure,EUTRAN_RedCap_Relax}$ [s] (number of DRX or eDRX cycles Note 3)	$T_{evaluate,E-UTRAN_RedCap_Relax}$ [s] (number of DRX or eDRX cycles Note 3)
10.24 ≤ eDRX_IDLE cycle length ≤ 2621.444	0.32	≥1.28 (1)	$eDRX_cycle_length \times \left\lceil \frac{\text{K3 x } 23}{\lceil PTW / DRX_cycle_length \rceil} \right\rceil$ (23 x K3)	0.32 x K3 (1 x K3)	0.64 x K3 (2 x K3)
	0.64	≥1.28 (1)		0.64 x K3 (1 x K3)	1.28 x K3 (2 x K3)
	1.28	≥2.56 (2)		1.28 x K3 (1 x K3)	2.56 x K3 (2 x K3)
	2.56	≥5.12 (4)		2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)
NOTE 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs. NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 5.12s, number of DRX cycles otherwise. NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,E-UTRAN_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.					

16.1.2.1 NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 1 Rx UE

16.1.2.1.1 Test purpose

The purpose of this test is to verify the requirement for the NR – E-UTRA inter-RAT cell reselection to higher priority E-UTRA cell, for 1 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.5.

16.1.2.1.2 Test applicability

This test applies to all types of NR RedCap UEwith 1Rx from release 17 and forward.

16.1.2.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.2.1.

16.1.2.1.4 Test description

16.1.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.2.1.4.1-1.

Table 16.1.2.1.4.1-1: Supported test configurations for NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 1RX

Configuration	Description of serving cell	Description of target cell
16.1.2.1.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.1-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.1-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode

16.1.2.1.1-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.1-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.1.2.1.4.1-2.

Table 16.1.2.1.4.1-2: Initial conditions for NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 1RX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	Without faders.		

1. The general test parameter settings are set up according to Table 16.1.2.1.4.1-3.
2. Message contents are defined in clause 16.1.2.1.4.3.
3. There are two cells in the test on two carriers. Cell 1 is the NR PCell and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1. E-UTRAN cell 2 is of higher priority than cell 1.

Table 16.1.2.1.4.1-3: General test parameters for NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 1RX

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6, 8	4	
E-UTRAN PRACH			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
configuration index			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6, 7, 8	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.

T2	s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3, 4, 5, 6, 7, 8	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.2.1.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an E-UTRA neighbour cell (Cell 2). The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively.

Before T1 the UE is camped on to cell 1. During T1, cell 2 shall be powered off. At the start of T2 the UE is expected to detect cell 2, send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2. At the start of T3 cell 2 becomes weaker than cell 1, and the UE reselects to Cell 1.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* with Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.
2. Set the parameters according to T1 in Table 16.1.2.1.5-1 and 16.1.2.1.5-2. T1 starts.
3. During T1, Cell 2 shall be powered off and set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008 for one iteration of the test procedure loop.
4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 16.1.2.1.5-1 and 16.1.2.1.5-2. T2 starts.
5. The SS waits for random access requests information from the UE to perform cell re-selection to a higher priority Cell 2.
6. If the UE responds on Cell 2 during time duration T2 within 68 seconds from the beginning of time period T2, then count a success, continue with step 7. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, count a fail, and the TE shall switch off and, on the UE, and skip to step 12.
7. The SS shall send an *RRCConnectionRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.
8. The SS shall switch the power setting from T2 to T3 as specified in Table 16.1.2.1.5-1 and 16.1.2.1.5-2. T3 starts.
9. The SS waits for random access requests information from the UE to perform cell re-selection to a lower priority Cell 1.
10. If the UE has re-selected Cell 1 within T3, after the re-selection or when T3 expires, continue with step11. Otherwise, if T3 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and, on the UE and skip to step 12.
11. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.
12. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5.
13. Repeat step 2-12 until a test verdict with the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

16.1.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.1.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.3-1 Table H.2.3-2 with Condition SMTC 1 and higher priority for configuration 16.1.2.1-2, 16.1.2.1-3, 16.1.2.1-5 and 16.1.2.1-6 Table H.2.3-2 with Condition SMTC 2 and higher priority for configuration 16.1.2.1-1, 16.1.2.1-4, 16.1.2.1-7 and 16.1.2.1-8 Table H.2.3-3 with Condition higher priority
Default RRC messages and information elements contents exceptions	

Table 16.1.2.1.4.3-2: SystemInformationBlockType3

Derivation Path: TS 36.508 [25] Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
threshServingLow	22	Actual value = 44 dB	
cellReselectionPriority	5		higher priority E-UTRA
}			
}			

Table 16.1.2.1.4.3-3: SystemInformationBlockType24

Derivation Path: TS 36.508 [25] Table 4.4.3.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
cellReselectionPriority-r15[*n*]	4		higher priority E-UTRA
threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
}			
}			

16.1.2.1.5 Test requirement

Table 16.1.2.1.5-1 defines the primary level settings including test tolerances for NR – E-UTRA cell re-selection test case in AWGN for 1 Rx UE.

Table 16.1.2.1.5-1: NR cell specific test parameters for NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 1RX

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
TDD configuration		1, 4, 7, 8	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH parameters		1, 4, 7, 8	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET parameters		1, 4, 7, 8	CR.1.1 FDD		

		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
Dedicated CORESET parameters		1, 4, 7, 8	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
SSB parameters		1, 4, 7, 8	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.1 RedCap FR1		
NR SMTC parameters		1, 4, 7, 8	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
N_{oc}	dBm/SCS	1, 4, 7, 8	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
SS-RSRP	dBm/SCS	1, 4, 7, 8	-84	-84	-82.40-
		2, 5	-84	-84	-82.40-
		3, 6	-81	-81	-79.40-
$\hat{E}_s / I_{ot}$	dB	1, 4, 7, 8	14	14	15.60
		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 4, 7, 8	14	14	15.60
		2, 5			
		3, 6			
Io	dBm/9.36 MHz	1, 4, 7, 8	-55.88	-55.88	-54.33
	dBm/9.36 MHz	2, 5	-55.88	-55.88	-54.33
	dBm/18.36 MHz	3, 6	-52.95	-52.95	-51.40
Treselection	S	1, 2, 3, 4, 5, 6, 7, 8	0		
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
$Thresh_{x, highP}$ (Note 2)	dB	1, 2, 3, 4, 5, 6, 7, 8	48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell

Table 16.1.2.1.5-2: E-UTRA Cell specific test parameters for NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 1RX

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		

PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
QrxlevminNote 3	dBm	-139		
Noc		-98	-98	-100
RSRP	dBm/15 KHz	-infinity	-84.4	-103.6
$\hat{E}_s / I_{ot}$	dB	-infinity	13.6	-3.6
$\hat{E}_s / N_{oc}$	dB	-infinity	13.6	-3.6
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	Not sent		
$Thresh_{X, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{X, lowP (Note 2)}$	dB	50		
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: This refers to the value of $Thresh_{X, Low}$ which is included in E-UTRA system information, and is a threshold for the NR target cell
Note 3: Value modified in Test Tolerance analysis in TS 38.903.

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

16.1.2.2 NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 2 Rx UE

16.1.2.2.1 Test purpose

The purpose of this test is to verify the requirement for the NR – E-UTRA inter-RAT cell reselection to higher priority E-UTRA cell, for 2 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.5.

16.1.2.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 and forward.

16.1.2.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.2.2.

16.1.2.2.4 Test description

16.1.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.2.2.4.1-1.

Table 16.1.2.2.4.1-1: Supported test configurations for NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 2 RX

Configuration	Description of serving cell	Description of target cell
16.1.2.1.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.2-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.2-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.2-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.2-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.1.2.2.4.1-2.

Table 16.1.2.2.4.1-2: Initial conditions for NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 2RX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	Without faders.		

1. The general test parameter settings are set up according to Table 16.1.2.2.4.1-3.
2. Message contents are defined in clause 16.1.2.2.4.3.
3. There are two cells in the test on two carriers. Cell 1 is the NR PCell and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 16.1.2.2.4.1-3: General test parameters for NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 2 RX

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	

Access Barring Information	-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length	s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index		1, 2, 3, 7	53	As specified in table 5.7.1-2 in TS 36.211 [23]
		4, 5, 6, 8	4	
E-UTRAN PRACH		1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
configuration index		4, 5, 6	4	
T1	s	1, 2, 3, 4, 5, 6, 7, 8	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2	s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3, 4, 5, 6, 7, 8	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.2.2.4.2 Test procedure

Same test procedure as in 16.1.2.1.4.2.

16.1.2.2.4.3 Message contents

Same message contents as in 16.1.2.1.4.3.

16.1.2.2.5 Test requirement

Table 16.1.2.2.5-1 defines the primary level settings including test tolerances for NR – E-UTRA cell re-selection test case in AWGN for 2 Rx UE.

Table 16.1.2.2.5-1: NR cell specific test parameters for NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 2 RX

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
TDD configuration		1, 4, 7, 8	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH parameters		1, 4, 7, 8	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET parameters		1, 4, 7, 8	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
Dedicated CORESET parameters		1, 4, 7, 8	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
SSB parameters		1, 4, 7, 8	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.1 RedCap FR1		
NR SMTC parameters		1, 4, 7, 8	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB		

Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
N_{oc}	dBm/SCS	1, 4, 7, 8	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
SS-RSRP	dBm/SCS	1, 4, 7, 8	-84	-82.40	-82.40
		2, 5	-84	-82.40	-82.40
		3, 6	-81	-79.40	-79.40
$\hat{E}_s/I_{ot}$	dB	1, 4, 7, 8	14	15.60	15.60
		2, 5			
		3, 6			
$\hat{E}_s/N_{oc}$	dB	1, 4, 7, 8	14	15.60	15.60
		2, 5			
		3, 6			
Io	dBm/9.36 MHz	1, 4, 7, 8	-55.88	-54.33	-54.33
	dBm/9.36 MHz	2, 5	-55.88	-54.33	-54.33
	dBm/18.36 MHz	3, 6	-52.95	-51.40	-51.40
Treselection	S	1, 2, 3, 4, 5, 6, 7, 8	0		
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
$Thresh_{x, highP}$ (Note 2)	dB	1, 2, 3, 4, 5, 6, 7, 8	48		
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44		
$Thresh_{x, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell					

Table 16.1.2.2.5-2: E-UTRA Cell specific test parameters for for NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 2 RX

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			

OCNG_RA[Note 1]	dB			
OCNG_RB[Note 1]	dB			
Qrxlevmin	dBm	-140		
N_{oc}	dBm/15 kHz	-98	-98	-100
RSRP	dBm/15 KHz	-infinity	-84.4	-103.6
$\hat{E}_s / I_{ot}$	dB	-infinity	13.6	-3.6
$\hat{E}_s / N_{oc}$	dB	-infinity	13.6	-3.6
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	Not sent		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP (Note 2)}$	dB	50		
Propagation Condition		AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, Low}$ which is included in E-UTRA system information, and is a threshold for the NR target cell				

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

16.1.2.3 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 1 Rx UE

16.1.2.3.1 Test purpose

The purpose of this test is to verify the requirement for the NR – E-UTRA inter-RAT cell reselection to lower priority E-UTRA cell, for 1 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.5.

16.1.2.3.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 and forward.

16.1.2.3.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.2.3.

16.1.2.3.4 Test description

16.1.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.2.3.4.1-1.

Table 16.1.2.3.4.1-1: Supported test configurations for NR SA FR1 – E-UTRA Cell reselection to lower priority E-UTRA for 1RX

Configuration	Description of serving cell	Description of target cell
16.1.2.1.3-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.3-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode

16.1.2.1.3-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.3-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.3-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.3-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.3-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.3-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.1.2.3.4.1-2.

Table 16.1.2.3.4.1-2: Initial conditions for NR SA FR1 – E-UTRA Cell reselection to lower priority E-UTRA for 1RX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	Without faders.		

1. The general test parameter settings are set up according to Table 16.1.2.3.4.1-3.
2. Message contents are defined in clause 16.1.2.3.4.3.
3. There are two cells in the test on two carriers. Cell 1 is the NR PCell and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 16.1.2.3.4.1-3: General test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 1RX

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7	534	As specified in table 5.7.1-2 in TS 36.211 [23]

		4, 5, 6, 8		
T1	s	1, 2, 3, 4, 5, 6, 7, 8	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.2.3.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an E-UTRA neighbour cell (Cell 2). The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5 on Cell 1.
2. Set the parameters according to T2 in Table 16.1.2.3.5-1 and 16.1.2.3.5-2. SS waits at least for 32sec($T_{detect,EUTRAN}$) to ensure the UE can detect E-UTRA neighbour cell (Cell2).
3. Set the parameters according to T1 in Table 16.1.2.3.5-1 and 16.1.2.3.5-2. T1 starts.
4. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.
5. If the UE responds on Cell 2 during time duration T1 within 8 seconds from the beginning of time period T1 then count a success for the event “re-select lower priority E-UTRA Cell 2” and continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, count a failure for the event “re-select lower priority E-UTRA Cell 2”, the TE shall switch off and on the UE and skip to step 11.

6 The SS shall send an *RRCConnectionRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

7. The SS shall switch the power setting from T1 to T2 as specified in Table 16.1.2.3.5-1 and 16.1.2.3.5-2. T2 starts.
8. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 1.
9. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 10. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch off the UE and skip to step 11.
10. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.
11. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR* according to TS 38.508-1 [14] clause 4.5.
12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.1.2.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.1.2.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.3-1 Table H.2.3-3 with Condition lower priority
Default RRC messages and information elements contents exceptions	

Table 16.1.2.3.4.3-2: SIB2

Derivation Path: Table H.2.3-2 with condition lower priority			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	Not present	UE applies the default value of infinity	
}			
intraFreqCellReselectionInfo SEQUENCE {			
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.1		16.1.2.2-2, 16.1.2.2-3, 16.1.2.2-5, 16.1.2.2-6
	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2		16.1.2.2-1, 16.1.2.2-4, 16.1.2.2-7, 16.1.2.2-8,
}			
}			

16.1.2.3.4.3-3: SystemInformationBlockType3

Derivation Path: TS 36.508 [25] Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
threshServingLow	22	Actual value = 44 dB	
cellReselectionPriority	4		lower priority E-UTRA
}			
}			

16.1.2.3.4.3-4: SystemInformationBlockType24

Derivation Path: TS 36.508 [25] Table 4.4.3.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
cellReselectionPriority-r15[*n*]	5		lower priority E-UTRA
threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
}			
}			

16.1.2.3.5 Test requirement

Table 16.1.2.3.5-1 defines the primary level settings including test tolerances for NR – E-UTRA cell re-selection test case in AWGN for 1 Rx UE.

Table 16.1.2.3.5-1: NR cell specific test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 1RX

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4, 7, 8	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	

PDSCH RMC configuration		1, 4, 7, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4, 7, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4, 7, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4, 7, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
SMTC configuration		1, 4, 7, 8	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
Qrxlevmin[Note3]	dBm/SCS	1, 2, 4, 5	-139	
		3, 6	-136	
N_{oc}	dBm/SCS	1, 4, 7, 8	-100	
		2, 5	-100	
		3, 6	-97	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-100	
SS-RSRP	dBm/SCS	1, 4, 7, 8	-103.6	-84.4
		2, 5	-103.6	-84.4
		3, 6	-100.6	-81.4
$\hat{E}_s / I_{ot}$	dB	1, 4, 7, 8	-3.6	13.6
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4, 7, 8	-3.6	13.6
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4, 7, 8	-70.48	-56.26
	dBm/9.36 MHz	2, 5	-70.48	-56.26
	dBm/18.36 MHz	3, 6	-65.12	-53.15
Treselection	S	1, 2, 3, 4, 5, 6, 7, 8	0	
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	Not sent	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
$Thresh_{x, lowP (Note 2)}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell
Note 3: Value modified in Test Tolerance analysis in TS 38.903.

Table 16.1.2.3.5-2: E-UTRA Cell specific test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 1RX

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	

PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-82.4	-84
$\hat{E}_s / I_{ot}$	dB	15.6	14
$\hat{E}_s / N_{oc}$	dB	15.6	14
$Treselection_{EUTRAN}$	S	0	
SnonintrasearchP	dB	Not sent	
$Thresh_{x, highP}$ (Note 2)	dB	48	
$Thresh_{serving, lowP}$	dB	44	
$Thresh_{x, lowP}$	dB	50	
Propagation Condition		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

16.1.2.4 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 2 Rx UE

16.1.2.4.1 Test purpose

The purpose of this test is to verify the requirement for the NR – E-UTRA inter-RAT cell reselection to lower priority E-UTRA cell, for 2 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.5.

16.1.2.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 and forward.

16.1.2.4.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.2.4.

16.1.2.4.4 Test description

16.1.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.2.4.4.1-1.

Table 16.1.2.4.4.1-1: Supported test configurations for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 2RX

Configuration	Description of serving cell	Description of target cell
16.1.2.1.4-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.4-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.4-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.4-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.4-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.4-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.4-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.4-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.1.2.4.4.1-2.

Table 16.1.2.4.4.1-2: Initial conditions for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 2RX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	Without faders.		

1. The general test parameter settings are set up according to Table 16.1.2.4.4.1-3.
2. Message contents are defined in clause 16.1.2.4.4.3.
3. There are two cells in the test on two carriers. Cell 1 is the NR PCell and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 16.1.2.4.4.1-3: General test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 2RX

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	

Access Barring Information	-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length	s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index		1, 2, 3, 7	534	As specified in table 5.7.1-2 in TS 36.211 [23]
		4, 5, 6, 8		
T1	s	1, 2, 3, 4, 5, 6, 7, 8	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.2.4.4.2 Test procedure

Same test procedure as in 16.1.2.3.4.2.

16.1.2.4.4.3 Message contents

Same message contents as in 16.1.2.3.4.3.

16.1.2.4.5 Test requirement

Table 16.1.2.4.5-1 defines the primary level settings including test tolerances for NR – E-UTRA cell re-selection test case in AWGN for 2 Rx UE.

Table 16.1.2.4.5-1: NR cell specific test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 2RX

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4, 7, 8	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4, 7, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4, 7, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4, 7, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4, 7, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
SMTC configuration		1, 4, 7, 8	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-100	
		2, 5	-100	
		3, 6	-97	

N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-100	
SS-RSRP	dBm/SCS	1, 4, 7, 8	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s/I_{ot}$	dB	1, 4, 7, 8	-3.6	13.6
		2, 5		
		3, 6		
$\hat{E}_s/N_{oc}$	dB	1, 4, 7, 8	-3.6	13.6
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4, 7, 8	-70.84	-56.26
	dBm/9.36 MHz	2, 5	-70.84	-56.26
	dBm/18.36 MHz	3, 6	-65.12	-55.15
Treselection	S	1, 2, 3, 4, 5, 6, 7, 8	0	
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	Not sent	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
$Thresh_{x, lowP (Note 2)}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, high}$ which is included in NR system information, and is a threshold for the E-UTRA target cell				

Table 16.1.2.4.5-2: E-UTRA cell specific test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 2RX

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA[Note 1]	dB		
OCNG_RB[Note 1]	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-82.4	-84
$\hat{E}_s/I_{ot}$	dB	15.6	14
$\hat{E}_s/N_{oc}$	dB	15.6	14
$Treselection_{EUTRAN}$	S	0	
SnonintrasearchP	dB	Not sent	
$Thresh_{x, highP (Note 2)}$	dB	48	
$Thresh_{serving, lowP}$	dB	44	
$Thresh_{x, lowP}$	dB	50	
Propagation Condition		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

16.1.2.5 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

16.1.2.5.1 Test purpose

The purpose of this test is to verify the requirement for the NR – E-UTRA inter-RAT cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.11.2.

16.1.2.5.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 and forward supporting Rel.17 stationary idle mode relaxed measurement criterion.

16.1.2.5.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.2.5.

16.1.2.5.4 Test description

16.1.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.2.5.4.1-1.

Table 16.1.2.5.4.1-1: Supported test configurations for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Configuration	Description of serving cell	Description of target cell
16.1.2.1.5-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.5-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.5-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.5-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.5-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.5-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.5-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.5-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.1.2.5.4.1-2.

Table 16.1.2.5.4.1-2: Initial conditions for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	Without faders.		

1. The general test parameter settings are set up according to Table 16.1.2.5.4.1-3.
2. Message contents are defined in clause 16.1.2.5.4.3.
3. There are two cells in the test on two carriers. Cell 1 is the NR PCell and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 16.1.2.5.4.1-3: General test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase, it fulfils stationary criterion, and during T1 period the UE reselects to cell 2
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T1
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 with higher priority during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	0.64	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7, 8	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6, 7, 8	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6, 7, 8	35	T2 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.2.5.4.2 Test procedure

Two cells are deployed in the test, which are one FR1 NR PCell (Cell 1) and an E-UTRA neighbour cell (Cell 2). The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-

UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

The UE is configured with the relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in TS 38.304 [30]. So, Cell 1 configures the UE as follows:

- *stationaryMobilityEvaluation* [13] criterion is configured according to the parameters listed TS 38.133 [6] in Table A.16.1.1.8.2-3;
- *cellEdgeEvaluationWhileStationary* [13] criterion is not configured;
- *combineRelaxedMeasCondition2* [13] is not configured;

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling stationary relaxed measurement criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The physical cell identity of Cell 2 does not change throughout the test.1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR according to TS 38.508-1 [14] clause 4.5.

1a. Set the parameters according to T2 in Table 16.1.2.5.5-1 and Table 16.1.2.5.5-2. SS waits at least for 113 sec ($T_{detect,EUTRAN_Relax}$ + *t-SearchDeltaP-Stationary-r17*) to ensure the UE can detect E-UTRA neighbor cell (Cell 2).

2. Set the parameters according to T1 in Table 16.1.2.5.5-1 and 16.1.2.5.5-2. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 2.

4. If the UE responds on Cell 2 during time duration T1 within 32 seconds from the beginning of time period T1 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

5. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11.

6 The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE.

7. The SS shall switch the power setting from T1 to T2 as specified in Table 16.1.2.5.5-1 and 16.1.2.5.5-2. T2 starts.

8. The SS waits for random access requests information from the UE to perform cell re-selection on Cell 1.

9. If the UE has re-selected Cell 1 within T2, after the re-selection or when T2 expires, continue with step 10. Otherwise, if T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.

10 The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE, and then skip to step 12.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR according to TS 38.508-1 [14] clause 4.5.

11a. Set the parameters according to T2 in Table 16.1.2.5.5-1 and Table 16.1.2.5.5-2. SS waits at least for 113 sec (Tdetect,EUTRAN_Relax+ t-SearchDeltaP-Stationary-r17) to ensure the UE can detect E-UTRA neighbor cell (Cell 2).

12. Repeat step 2-11 a until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.1.2.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.1.2.5.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	Table H.2.3-1 Table H.2.3-2 with Condition SMTC 1 and lower priority for configuration 16.1.2.5-2, 16.1.2.5-3, 16.1.2.5-5 and 16.1.2.5-6 Table H.2.3-2 with Condition SMTC 2 and lower priority for configuration 16.1.2.5-1, 16.1.2.5-4, 16.1.2.5-7 and 16.1.2.5-8 Table H.2.3-3 with Condition lower priority
Default RRC messages and information elements contents exceptions	Table H.3.2-1

16.1.2.5.4.3-2: SIB2

Derivation Path: TS 38.508-1 [14] Table 4.6.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
relaxedMeasurement-r17 SEQUENCE {			
stationaryMobilityEvaluation-r17 SEQUENCE {			
s-SearchDeltaP-Stationary-r17	dB3		
t-SearchDeltaP-Stationary-r17	s5		
}			
cellEdgeEvaluationWhileStationary-r17	Not present		
combineRelaxedMeasCondition2-r17	Not present		
}			
}			

16.1.2.5.4.3-3: SystemInformationBlockType3

Derivation Path: TS 36.508 [25] Table 4.4.3.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType3 ::= SEQUENCE {			
relaxedMeasurement-r16 SEQUENCE {			
threshServingLow	22	Actual value = 44 dB	
cellReselectionPriority	4		lower priority E-UTRA
}			
}			

16.1.2.5.4.3-4: SystemInformationBlockType24

Derivation Path: TS 36.508 [25] Table 4.4.3.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SystemInformationBlockType24-r15 ::= SEQUENCE {			
carrierFreqListNR-r15 SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 entry		
cellReselectionPriority-r15[*n*]	5		lower priority E-UTRA
threshX-High-r15[1]	24	Actual value = 48 dB	
threshX-Low-r15[1]	25	Actual value = 50 dB	
}			
}			

16.1.2.5.5 Test requirement

Table 16.1.2.5.5-1 defines the primary level settings including test tolerances for NR – E-UTRA cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE.

Table 16.1.2.5.5-1: NR cell specific test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4,7, 8	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
SMTC configuration		1, 4, 8	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
Qrxlevmin[Note3]	dBm/SCS	1, 2, 4, 5	-139	
		3, 6	-136	
N_{oc}	dBm/SCS	1, 4, 8	-100	
		2, 5	-100	
		3, 6	-97	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-100	
SS-RSRP	dBm/SCS	1, 4, 8	-103.6	-84.4
		2, 5	-103.6	-84.4
		3, 6	-100.6	-81.4
$\hat{E}_s / I_{ot}$	dB	1, 4, 8	-3.6	13.6
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4, 8	-3.6	13.6
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4, 8	-70.84	-56.26
	dBm/9.36 MHz	2, 5	-70.84	-56.26
	dBm/18.36 MHz	3, 6	-65.12	-55.15
TreselectionP	S	1, 2, 3, 4, 5, 6, 7, 8	0	
Snonintrasearch	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
$Thresh_{x, lowP}$ (Note 2)	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
$S_{SearchDeltaP-Stationary}$	dB	1, 2, 3, 4, 5, 6, 7, 8	3	
$T_{SearchDeltaP-Stationary}$	s	1, 2, 3, 4, 5, 6, 7, 8	5	
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: This refers to the value of $Thresh_{x, low}$ which is included in NR system information, and is a threshold for the E-UTRA target cell
Note 3: Value modified in Test Tolerance analysis in TS 38.903.

Table 16.1.2.5.5-2: E-UTRA cell specific test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA Note 1	dB		
OCNG_RB Note 1	dB		
Qrxlevmin	dBm	-140	
$\hat{N}_{oc}$	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-82.4	-84
$\hat{E}_s / I_{ot}$	dB	15.6	14
$\hat{E}_s / N_{oc}$	dB	15.6	14
$Treselection_{EUTRAN}$	S	0	
Snonintrasearch	dB	Not sent	
$Thresh_{x, high}$ (Note 2)	dB	48	
$Thresh_{serving, low}$	dB	44	
$Thresh_{x, low}$	dB	50	
Propagation Condition		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling stationary relaxed measurement criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 32 s.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

16.1.2.6 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

16.1.2.6.1 Test purpose

The purpose of this test is to verify the requirement for the NR – E-UTRA inter-RAT cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.11.2.

16.1.2.6.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 and forward supporting Rel.17 stationary idle mode relaxed measurement criterion.

16.1.2.6.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 16.1.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.1.2.6.

16.1.2.6.4 Test description

16.1.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.1.2.6.4.1-1.

Table 16.1.2.6.4.1-1: Supported test configurations for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Configuration	Description of serving cell	Description of target cell
16.1.2.1.6-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.6-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.6-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.6-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.6-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.6-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
16.1.2.1.6-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
16.1.2.1.6-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.1.2.6.4.1-2.

Table 16.1.2.6.4.1-2: Initial conditions for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	

Exceptions to connection diagram	Without faders.	

1. The general test parameter settings are set up according to Table 16.1.2.6.4.1-3.
2. Message contents are defined in clause 16.1.2.6.4.3.
3. There are two cells in the test on two carriers. Cell 1 is the NR PCell and Cell 2 is the E-UTRA neighbour cell. Cell 1 is configured according to Annex C.1.1 and C.1.2, Cell 2 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1.

Table 16.1.2.6.4.1-3: General test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase, it fulfils stationary criterion, and during T1 period the UE reselects to cell 2
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T1
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 with higher priority during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	0.64	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6, 8	4	
T1		s	1, 2, 3, 4, 5, 6, 7, 8	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6, 7, 8	35	T2 needs to be defined so that cell re-selection reaction time is taken into account.

16.1.2.6.4.2 Test procedure

Same test procedure as in 16.1.2.5.4.2.

16.1.2.6.4.3 Message contents

Same message contents as in 16.1.2.5.4.3.

16.1.2.6.5 Test requirement

Table 16.1.2.6.5-1 defines the primary level settings including test tolerances for NR – E-UTRA cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE.

Table 16.1.2.6.5-1: NR cell specific test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1	
			T1	T2

TDD configuration		1, 4, 7, 8	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4, 7, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4, 7, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4, 7, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4, 7, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
SMTC configuration		1, 4, 7, 8	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4, 7, 8	-100	
		2, 5	-100	
		3, 6	-97	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-100	
SS-RSRP	dBm/SCS	1, 4, 7, 8	-103.6	-84.4
		2, 5	-103.6	-84.4
		3, 6	-100.6	-81.4
$\hat{E}_s / I_{ot}$	dB	1, 4, 7, 8	-3.6	13.6
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4, 7, 8	-3.6	13.6
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4, 7, 8	-70.84	-56.26
	dBm/9.36 MHz	2, 5	-70.84	-56.26
	dBm/18.36 MHz	3, 6	-65.12	-53.15
TreselectionP	S	1, 2, 3, 4, 5, 6, 7, 8	0	
Snonintrasearch	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
$Thresh_{x, highP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
$Thresh_{serving, lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
$Thresh_{x, lowP (Note 2)}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
$S_{SearchDeltaP-Stationary}$	dB	1, 2, 3, 4, 5, 6, 7, 8	3	
$T_{SearchDeltaP-Stationary}$	s	1, 2, 3, 4, 5, 6, 7, 8	5	
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, low}$ which is included in NR system information, and is a threshold for the E-UTRA target cell

Table 16.1.2.6.5-2: E-UTRA cell specific test parameters for NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	

OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA[Note 1]	dB		
OCNG_RB[Note 1]	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-82.4	-84
$\hat{E}_s / I_{ot}$	dB	15.6	14
$\hat{E}_s / N_{oc}$	dB	15.6	14
$Treselection_{EUTRAN}$	S	0	
Snonintrasearch	dB	Not sent	
$Thresh_{x, high (Note 2)}$	dB	48	
$Thresh_{serving, low}$	dB	44	
$Thresh_{x, low}$	dB	50	
Propagation Condition		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: This refers to the value of $Thresh_{x, high}$ which is included in E-UTRA system information, and is a threshold for the NR target cell

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling stationary relaxed measurement criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 32 s.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

16.2 RRC_INACTIVE state mobility for RedCap

16.2.1 Configured Grant based Small Data Transmissions for RedCap

16.2.1.0 Minimum conformance requirements

16.2.1.0.1 Minimum conformance requirements for TA validation using CG-SDT

The requirements in this clause are applicable when the UE is configured with timing alignment (TA) validation using cg-SDT-RSRP-ChangeThreshold for transmitting in uplink using CG-SDT as specified in TS 38.331 [13].

The requirements in this clause are applicable for the UE performing small data tranmissions using configured resources as TS 38.331 [13].

The UE is allowed to transmit using the configured uplink resources provided that the UE is synchronized towards (i.e. using the timing derived using the latest available N_{TA} value as specified in subclause 7.1.2) the serving cell prior to transmission. If the UE is not able to obtain the synchronization towards the serving cell then the UE shall drop the small data transmission. The UE determines the small data transmission occasion according to the received CG-SDT configuration as specified in TS 38.331 [13].

When *cg-SDT-RSRP-ChangeThreshold* [13] is configured for TA validation based on the RSRP change criterion according to clause 5.8.2 in [12], the UE is allowed to transmit using CG-SDT using the timing derived using the latest available N_{TA} value as specified in TS 38.133 [6] subclause 7.1 provided that

- the first RSRP ($RSRP_1$) measurement and the second RSRP ($RSRP_2$) measurements used in the TA validation are valid measurements and,
- timing alignment validation for transmission using CG-SDT is valid according to the validation criteria in clause 5.8.2 in [12].

$RSRP_1$ and $RSRP_2$ are considered valid provided that the conditions in Table 16.2.1.0.1-1 are met for FR1.

Table 16.2.1.0.1-1 Valid measurement for FR1

Measurement	FR1
$RSRP_1$	$(T1 - \min(640ms, M1*T_{DRX})) \le T1' \le (T1 + \min(640ms, M1*T_{DRX}))$
$RSRP_2$	$(T2 - \min(640ms, M1*T_{DRX})) \le T2' \le T2$

If at least one of $RSRP_1$ and $RSRP_2$ is considered to be invalid based on the above conditions, then the UE shall not validate the CG-SDT using $RSRP_1$ and $RSRP_2$ and shall not transmit using CG-SDT. Additionally, for the initial CG-SDT transmission, the UE shall not transmit in an CG-SDT occasion that occurs more than 640 ms after T2.

Where:

- T1 is the time when
  - *RRCRelease* with CG-SDT configuration (TS 38.331 [2]) is received, or
  - the latest TA is received if TA is received while in RRC_INACITVE state.
- T1' is the time when the UE has completed $RSRP_1$.
- T2 is the time when the UE performs TA validation as defined in TS 38.321 [12] clause 5.27.2 for transmission using CG-SDT.
- T2' is the time when the UE has completed $RSRP_2$.
- T_{DRX} is the DRX cycle length in ms.
- M1 the scaling factor as defined in TS 38.133 [6] clause 4.2.2.2.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [11] the following restrictions apply due to SS-RSRP/RSRQ measurement

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH on all symbols within SMTC window duration.

For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [11] the following restrictions apply due to measurement of serving cell.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/ on SSB symbols of the serving cell.

The UE is not required to meet the following measurement requirements during subsequent SDT transmissions:

- Measurements of inter-frequency NR cells in TS 38.133 [6] clause 5.1.2.4

- Measurements of inter-RAT E-UTRAN cells in TS 38.133 [6] clause 5.1.2.5

- Idle Mode CA/DC Measurements in TS 38.133 [6] clause 5.4

The UE is allowed to delay the reception of PRS resources on the positioning frequency layer until the SDT session is completed if the measurement using PRS resource overlaps with the SDT resources.

The normative reference for this requirement is TS 38.133 [6] clauses 5.2B.

16.2.1.1 NR SA FR1 CG-SDT for 1 Rx UE

16.2.1.1.1 Test purpose

To verify that the UE properly perform TA validation for CG-SDT transmission as specified in TS 38.133 [6] clause 5.2B.2.1.

16.2.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards and supporting CG-SDT.

16.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.2.1.1.

16.2.1.1.4 Test description

Same as the test description given in clause 6.2.1.4.

16.2.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.2.1.4.1 with following exceptions:

- Table 6.2.1.4.1-1 is replaced by Table 16.2.1.1.4.1-1;
- Table 6.2.1.4.1-2 is replaced by Table 16.2.1.1.4.1-2;
- Table 6.2.1.4.1-3 is replaced by Table 16.2.1.1.4.1-3;

Table 16.2.1.1.4.1-1: Supported test configurations

Config	Description
16.2.1.1-1	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, NR FDD
16.2.1.1-2	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, NR TDD
16.2.1.1-3	SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz, NR TDD
16.2.1.1-4	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, NR HD-FDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.2.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

Table 16.2.1.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1,4		N/A	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52	
	Config 3		20: $N_{RB,c}$ = 51	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.3 FDD	
	Config 2		CCR.1.3 TDD	
	Config 3		CCR.2.2 TDD	
SSB configuration	Config 1,2,4		SSB.1 FR1	
	Config 3		SSB. 1 RedCap FR1	
OCNG Patterns			OP.1	
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration			DLBWP.1.1 ULBWP.1.1	
SMTC configuration			SMTC.1	
DRX configuration			DRX.7	
T_delay_modeB		s	4	
T1		s	0.4	

T2	s	1.28	2 x W1
T3	s	2.72	T_timer_modeB - W1 -W2
T4	s	1.5	W2+W3
T5	s	1.68	T1+T2
T6	s	4.22	T3+W2+W3
cg-SDT-RSRP-ChangeThreshold	dB	8	
cg-SDT-RSRP-ThresholdSSB	Config 1,2,4	dBm	-115
	Config 3		-112
cg-SDT-TimeAlignmentTime		Infinity	
CG-SDT resource period	ms	320	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
Propagation condition		AWGN	

16.2.1.1.4.2 Test procedure

Same as the test procedure given in clause 6.2.1.4.2.

16.2.1.1.4.3 Message contents

Same as the message contents given in 6.2.1.4.3 with following exceptions:

- Table 6.2.1.4.3-2 is replaced by Table 16.2.1.1.4.3-1.

Table 16.2.1.1.4.3-1: SDT-MAC-PHY-CG-Config-r17

Derivation Path: TS 38.508-1 [6], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**
SDT-MAC-PHY-CG-Config-r17::= SEQUENCE {			
cg-SDT-ConfigLCH-RestrictionToAddModList-r17 SEQUENCE (SIZE(1..maxLC-ID)) OF CG-SDT-Config-LCH-restriction-r17 {	1 entry		
logicalChannelIdentity-r17	LogicalChannelIdentity with condition DRB1		
configuredGrantType1Allowed-r17	true		
allowedCG-List-r17	Not present		
}			
cg-SDT-ConfigInitialBWP-NUL-r17 CHOICE {			
setup	BWP-UplinkDedicatedSDT-r17		
}			
cg-SDT-ConfigInitialBWP-SUL-r17	Not present		
cg-SDT-ConfigInitialBWP-DL-r17			
setup	BWP-DownlinkDedicatedSDT-r17		
}			
cg-SDT-TimeAlignmentTimer-r17	infinity		
cg-SDT-RSRP-ThresholdSSB-r17	44	-112dBm	Config 3
	41	-115dBm	Config 1,2,4
cg-SDT-TA-ValiditationConfig-r17 CHOICE {			
setup SEQUENCE {			
cg-SDT-RSRP-ChangeThreshold-r17	dB8		
}			
}			
}			

16.2.1.1.5 Test requirements

Same as the test requirements given in clause 6.2.1.5 with following exceptions:

- Table 6.2.1.5-1 is replaced by Table 16.2.1.1.5-1.

Table 16.2.1.1.5-1: Cell-specific test parameters (NR Cell 1)

Parameter	Config	Unit	SSB#0					
			T1	T2	T3	T4	T5	T6
N_{oc} Note1	1,2,3,4	dBm/15kHz	-100					
N_{oc} Note1	1,2,4	dBm/SSB SCS	-100					
	3		-97					
$\hat{E}_s / I_{ot}$		dB	0	12.43	0	14	14	-0.43
SS RSRP Note2	1,2,4	dBm/SSB SCS	-100	-87.57	-100	-86	-86	-100.43
	3		-97	-84.57	-97	-83	-83	-97.43
Io Note2	1,2,4	dBm/ 9.36 MHz	-69.04	-59.38	-69.04	-57.88	-57.88	-69.25
	3	dBm/ 18.36 MHz	-66.11	-56.45	-66.11	-54.95	-54.95	-66.32
$\hat{E}_s / N_{oc}$		dB	0	12.43	0	14	14	-0.43
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

16.2.1.2 NR SA FR1 CG-SDT for 2 Rx UE

16.2.1.2.1 Test purpose

To verify that the UE properly perform TA validation for CG-SDT transmission as specified in TS 38.133 [6] clause 5.2B.2.1.

16.2.1.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards and supporting CG-SDT.

16.2.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.2.1.2.

16.2.1.2.4 Test description

Same as the test description given in clause 6.2.1.4.

16.2.1.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.2.1.4.1 with following exceptions:

- Table 6.2.1.4.1-1 is replaced by Table 16.2.1.2.4.1-1;
- Table 6.2.1.4.1-2 is replaced by Table 16.2.1.2.4.1-2;
- Table 6.2.1.4.1-3 is replaced by Table 16.2.1.2.4.1-3;

Table 16.2.1.2.4.1-1: Supported test configurations

Config	Description
16.2.1.2-1	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, NR FDD
16.2.1.2-2	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, NR TDD
16.2.1.2-3	SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz, NR TDD
16.2.1.2-4	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, NR HD-FDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.2.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.2.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 16.2.1.2.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1,4		N/A	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52	
	Config 3		20: $N_{RB,c}$ = 51	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.3 FDD	
	Config 2		CCR.1.3 TDD	
	Config 3		CCR.2.2 TDD	
SSB configuration	Config 1,2,4		SSB.1 FR1	
	Config 3		SSB. 1 RedCap FR1	
OCNG Patterns			OP.1	
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration			DLBWP.1.1 ULBWP.1.1	
SMTC configuration			SMTC.1	
DRX configuration			DRX.7	
T_delay_modeB		s	4	
T1		s	0.4	
T2		s	1.28	2 x W1
T3		s	2.72	T_timer_modeB - W1 -W2
T4		s	1.5	W2+W3
T5		s	1.68	T1+T2
T6		s	4.22	T3+W2+W3
cg-SDT-RSRP-ChangeThreshold		dB	8	
cg-SDT-RSRP-ThresholdSSB		dBm	-110	
cg-SDT-TimeAlignmentTime			Infinity	
CG-SDT resource period		ms	320	

EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
Propagation condition		AWGN	

16.2.1.2.4.2 Test procedure

Same as the test procedure given in clause 6.2.1.4.2.

16.2.1.2.4.3 Message contents

Same as the message contents given in 6.2.1.4.3 with following exceptions:

- Table 6.2.1.4.3-2 is replaced by Table 16.2.1.2.4.3-1.

Table 16.2.1.2.4.3-1: SDT-MAC-PHY-CG-Config-r17

Derivation Path: TS 38.508-1 [6], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**
SDT-MAC-PHY-CG-Config-r17::= SEQUENCE {			
cg-SDT-ConfigLCH-RestrictionToAddModList-r17 SEQUENCE (SIZE(1..maxLC-ID)) OF CG-SDT-Config-LCH-restriction-r17 {	1 entry		
logicalChannelIdentity-r17	LogicalChannelIdentity with condition DRB1		
configuredGrantType1Allowed-r17	true		
allowedCG-List-r17	Not present		
}			
cg-SDT-ConfigInitialBWP-NUL-r17 CHOICE {			
setup	BWP-UplinkDedicatedSDT-r17		
}			
cg-SDT-ConfigInitialBWP-SUL-r17	Not present		
cg-SDT-ConfigInitialBWP-DL-r17			
setup	BWP-DownlinkDedicatedSDT-r17		
}			
cg-SDT-TimeAlignmentTimer-r17	infinity		
cg-SDT-RSRP-ThresholdSSB-r17	46	-110dBm	
cg-SDT-TA-ValiditationConfig-r17 CHOICE {			
setup SEQUENCE {			
cg-SDT-RSRP-ChangeThreshold-r17	dB8		
}			
}			
}			

16.2.1.2.5 Test requirements

Same as the test requirements given in clause 6.2.1.5 with following exceptions:

- Table 6.2.1.5-1 is replaced by Table 16.2.1.2.5-1.

Table 16.2.1.2.5-1: Cell-specific test parameters (NR Cell 1)

Parameter	Config	Unit	SSB#0					
			T1	T2	T3	T4	T5	T6

N_{oc} Note1	1,2,3,4	dBm/15kHz	-100					
N_{oc} Note1	1,2,4	dBm/SSB SCS	-100					
	3		-97					
$\hat{E}_s / I_{ot}$	1,2,4	dB	0	12	0	14	14	0.25
	3		0	12	0	14	14	0
SS RSRP Note2	1,2,4	dBm/SSB SCS	-100	-88	-100	-86	-86	-99.75
	3		-97	-85	-97	-83	-83	-97
Io Note2	1,2,4	dBm/ 9.36 MHz	-69.04	-59.78	-69.04	-57.88	-57.88	-68.91
	3	dBm/ 18.36 MHz	-66.11	-56.86	-66.11	-54.95	-54.95	-66.11
$\hat{E}_s / N_{oc}$	1,2,4	dB	0	12	0	14	14	0.25
	3		0	12	0	14	14	0
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

16.3 RRC_CONNECTED state mobility for RedCap

16.3.1 Handover for RedCap

16.3.1.0 Minimum conformance requirements

16.3.1.0.1 Minimum conformance requirements for NR – E-UTRAN handover

The requirements in clause 6.3.1.0.1 shall apply when RedCap UE is capable of 2 Rx.

When UE is only required to support 1 Rx antenna, the requirements for category 1bis UE defined in 36.133 [23] clause 5.1.2 shall apply.

The normative reference for this requirement is TS 38.133 [6] clause 6.1D.2.1.

16.3.1.0.2 Minimum conformance requirements for NR FR1 – NR FR1 handover

The purpose of NR handover is to change the NR PCell to another NR cell for RedCap UE. The requirements in this clause are applicable to SA NR.

The requirements in this clause apply for the following handover scenarios:

- Handover to a target cell's initial BWP associated with CD-SSB;
- Handover to a target cell's specific Redcap BWP associated with NCD-SSB besides to the initial BWP associated with CD-SSB (i.e. UE directly sync to the NCD-SSB and perform RACH on that BWP).

The requirements in clause 6.3.1.0.2 shall apply when RedCap UE is capable of 2 Rx.

When UE is only required to support 1 Rx antenna, the requirements defined in clause 6.1.1.2 shall apply except that:

- T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = 2*T_{rs} ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = 5* T_{rs} ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.
- T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise, T_{rs} is the SMTC configured in the *measObjectNR* having the

same SSB frequency and subcarrier spacing as NCD-SSB indicated by *nonCellDefiningSSB-r17* if the first active DL BWP included in handover command is configured with *nonCellDefiningSSB-r17*, otherwise, as CD-SSB indicated by *absoluteFrequencySSB* in *frequencyInfoDL* in handover command.

- If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, Trs is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signalling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

For RedCap UE with HD-FDD, the handover requirements are met provided that

- SSB is available at the UE once every SMTC period during Tsearch
- One SSB is available during T_{Δ}
- One SSB is available during $T_{IU.}$

The normative reference for this requirement is TS 38.133 [6] clause 6.1D.1.2.

16.3.1.1 NR SA FR1 handover with known target cell for 1 Rx UE

16.3.1.1.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements for 1 Rx RedCap UE specified in 38.133 [6] clause 6.1D.1.2.

16.3.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.3.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.1.1.

16.3.1.1.4 Test description

16.3.1.1.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.1.1.4.1 with the following exceptions:

- Table 6.3.1.1.4.1-1 is replaced by Table 16.3.1.1.4.1-1.
- Table 6.3.1.1.4.1-2 is replaced by Table 16.3.1.1.4.1-2.
- Table 6.3.1.1.4.1-3 is replaced by Table 16.3.1.1.4.1-3.

Table 16.3.1.1.4.1-1: Supported test configurations

Configuration	Description
16.3.1.1-1	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.1.1-2	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.1.1-3	Source cell:NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.1.1-4	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.3.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

Table 16.3.1.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	-2.5	A3 offset is updated via TT analysis
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

16.3.1.1.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.1.1.4.2.

16.3.1.1.4.3 Message contents

Same as the message contents specified in sub-clause 6.3.1.1.4.3 with following exceptions:

- Table H.3.1-4 is used with A3-offset = -2.5 dB.

16.3.1.1.5 Test requirement

Same as the test requirements given in sub-clause 6.3.1.1.5 with following exceptions:

- Table 6.3.1.1.5-1 is replaced by Table 16.3.1.1.5-1.
- $T_{interrupt}$ in test requirements is specified in 38.133 [6] clause 6.1D.2.2.

Table 16.3.1.1.5-1: Cell specific test parameters

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52					

	Config 3		20: $N_{RB,c}$ = 51					
BWP BW	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR.2.1 TDD					
CORESET Reference Channel	Config 1,4		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR.2.1 TDD					
TRS configuration	Config 1,4		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
SSB Configuration	Config 1,2,4		SSB.1 FR1			SSB.1 FR1		
	Config 3		SSB.1 RedCap FR1			SSB.1 RedCap FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30 kHz					
PRACH configuration			PRACH.1 FR1					
Initial DL BWP			DLBWP.0.1					
Dedicated DL BWP			DLBWP.1.1					
Initial UL BWP			ULBWP.0.1					
Dedicated UL BWP			ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS Note 1								
EPRE ratio of OCNG to OCNG DMRS Note 1								
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98					
	Config 3		-95					
$\hat{E}_s/I_{ot}$		dB	8	-1.65	-1.65	-∞	0.51	0.51
$\hat{E}_s/N_{oc}$		dB	8	8	8	-∞	9.15	9.15
SSB_RP	Config 1,2,4	dBm/SCS	-90	-90	-90	-∞	-88.85	-88.85
	Config 3	dBm/SCS	-87	-87	-87	-∞	-85.85	-85.85
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-61.41	-58.14	-58.14	-61.41	-58.14	-58.14
	Config 3	dBm/ 18.36MHz	-58.49	-55.21	-55.21	-58.49	-55.21	-55.21
Propagation condition		-	AWGN			AWGN		
Antenna Configuration			1x1					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 62 ms in the test. $T_{interrupt}$ is defined in clause 6.1D.1.2.

This gives a total of 72 ms.

16.3.1.2 NR SA FR1 handover with known target cell for 2 Rx UE

16.3.1.2.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements for 2 Rx RedCap UE as specified in 38.133 [6] clause 6.1D.1.2

16.3.1.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.3.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.1.2.

16.3.1.2.4 Test description

16.3.1.2.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.1.1.4.1 with the following exceptions:

- Table 6.3.1.1.4.1-1 is replaced by Table 16.3.1.2.4.1-1.
- Table 6.3.1.1.4.1-2 is replaced by Table 16.3.1.2.4.1-2.
- Table 6.3.1.1.4.1-3 is replaced by Table 16.3.1.2.4.1-3

Table 16.3.1.2.4.1-1: Supported test configurations

Configuration	Description
16.3.1.2-1	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.1.2-2	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.1.2-3	Source cell:NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.1.2-4	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.3.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 16.3.1.2.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	-1	
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

16.3.1.2.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.1.1.4.2.

16.3.1.2.4.3 Message contents

Same as the message contents specified in 6.3.1.1.4.3 with following exceptions:

- Table 7.3.1-3 in TS 38.508-1 [14] is used with condition SMTC.1.

16.3.1.2.5 Test requirement

Table 16.3.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 16.3.1.2.5-1: Cell specific test parameters

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
BWP BW	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR.2.1 TDD					
CORESET Reference Channel	Config 1,4		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR.2.1 TDD					
TRS configuration	Config 1,4		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
SSB Configuration	Config 1,2,4		SSB.1 FR1			SSB.1 FR1		
	Config 3		SSB.1 RedCap FR1			SSB.1 RedCap FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30 kHz					

PRACH configuration				PRACH.1 FR1					
BWP configuration	Initial DL BWP			DLBWP.0.1					
	Dedicated DL BWP			DLBWP.1.1					
	Initial UL BWP			ULBWP.0.1					
	Dedicated UL BWP			ULBWP.1.1					
EPRE ratio of PSS to SSS			dB	0					
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS Note 1									
EPRE ratio of OCNG to OCNG DMRS Note 1									
N_{oc} Note2			dBm/ 15kHz	-98					
N_{oc} Note2		Config 1,2,4	dBm/ SCS	-98					
		Config 3		-95					
$\hat{E}_s/I_{ot}$			dB	8	-2.41	-2.41	-∞	1.36	1.36
$\hat{E}_s/N_{oc}$			dB	8	8	8	-∞	10	10
SSB_RP		Config 1,2,4	dBm/ SCS	-90	-90	-90	-∞	-88	-88
		Config 3	dBm/ SCS	-87	-87	-87	-∞	-85	-85
Io Note3		Config 1,2,4	dBm/ 9.36MHz	-61.41	-57.67	-57.67	-61.41	-57.67	-57.67
		Config 3	dBm/ 18.36MHz	-58.49	-54.74	-54.74	-58.49	-54.74	-54.74
Propagation condition			-	AWGN			AWGN		
Antenna Configuration				1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

- RRC procedure delay = 10 ms, is the RRC processing delay specified in TS 38.331 [2] clause 12.
- $T_{interrupt}$ = 62 ms, is the interruption time specified in TS 38.133 [6] clause 6.1D.1.2.

This gives a total of 72 ms.

16.3.1.3 NR SA FR1 handover with unknown target cell for 1 Rx UE

16.3.1.3.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements for 1Rx RedCap as specified in TS 38.133 [6] clause 6.1D.1.2.

16.3.1.3.2 Test applicability

This test applies to all types of NR RedCap UEs with 1 Rx from Release 17 onwards.

16.3.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.1.3.

16.3.1.3.4 Test description

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively.

Before the test starts,

- UE is connected to Cell 1 with active DL BWP and active UL BWP
- UE is configured with *nonCellDefiningSSB-r17* under *BWP-DownlinkDedicated* which serves as the reference SSB for the serving cell. The *nonCellDefiningSSB-r17* corresponds to the NCD-SSB within the active DL BWP.

At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives an RRC handover command from the network indicating the UE to handover to cell 2 with *firstActiveDownlinkBWP-Id* configured to DL BWP and *firstActiveUplinkBWP-Id* configured to UL BWP. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

16.3.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.3.1.3.4.1-1.

Table 16.3.1.3.4.1-1: Supported test configurations

Config	Description
16.3.1.3-1	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.1.3-2	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.1.3-3	Source cell:NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.1.3-4	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 16.3.1.3.4.1-2

Table 16.3.1.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 16.3.1.3.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 16.3.1.3.4.1-3 below.

Table 16.3.1.3.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	

16.3.1.3.4.2 Test procedure

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell and RedCap-specific dedicated BWP of Cell 1 is the activated BWP. The SS transmits NCD-SSB on Cell 1 with an absolute frequency (in ARFCN value and aligned with channel raster) of

$$f_{\mathrm{NCDSSB}} = f_{\mathrm{pointA}} + \frac{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}} \cdot \left[\left(f_{\mathrm{CDSSB}} - f_{\mathrm{pointA}}\right) \cdot \frac{\Delta\mathrm{F}_{\mathrm{Global}}}{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}} \right] + \frac{N_{\mathrm{SC}}^{\mathrm{SSB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}}$$

   where,

   - f_{CDSSB} is the absolute frequency of CD-SSB (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
   - f_{pointA} is the absolute frequency of Point A (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
   - $\Delta\mathrm{F}_{\mathrm{Global}}$ is the granularity of the global frequency raster (in kHz) specified in 38.101-1 [2] clause 5.4.2.1;- $\mathrm{SCS}_{\mathrm{SSB}}$ is the subcarrier spacing of SSB (in kHz);
   - $N_{\mathrm{SC}}^{\mathrm{RB}} = 12$, is the number of subcarriers in an RB;
   - $N_{\mathrm{SC}}^{\mathrm{SSB}} = 240$, is the number of subcarriers in an SSB.

2. Set the parameters according to T1 in Table 16.3.1.3.5-1.
3. Set NR Cell 2 physical cell identity = (current NR cell 2 physical cell identity + 3) mod 1008 for current iteration of the test procedure loop.
4. SS shall transmit an *RRCReconfiguration* message implying handover to the RedCap-specific dedicated BWP of Cell 2.
5. At the instant when the last TTI containing the *RRCReconfiguration* message in step 4) is sent to the UE, the SS shall switch the power settings from T1 to T2 as specified in Table 16.3.1.3.5-1. T2 starts. The SS also transmits NCD-SSB on Cell 2 with an absolute frequency of f_{NCDSSB} calculated above.
6. If the UE transmits a PRACH preamble to Cell 2 satisfying the delay requirement specified in clause 16.3.1.3.5 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
7. After T2 expires, the SS shall

   - transmit an *RRCReconfiguration* message to cause the UE handover back to Cell 1. if the handover fails, switch off and on the UE

   or

   - switch off and on the UE.

8. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell and RedCap-specific dedicated BWP of Cell 1 is the activated BWP.

9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.3.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.3.1.3.4.3-1: *RRCReconfiguration* (Step 1, 4 and 8, test procedure)

Derivation Path: Table H.3.2-2 with condition RBConfig_KeyChange			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 16.3.1.3.4.3-2	
}			
}			
}			
}			

Table 16.3.1.3.4.3-2: *CellGroupConfig* (Table 16.3.1.3.4.3-1)

Derivation Path: Table H.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			
smtc	SMTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2 RedCap		
}			
spCellConfigDedicated	ServingCellConfig	Table 16.3.1.3.4.3-3	
}			

Table 16.3.1.3.4.3-3: *ServingCellConfig* (Table 16.3.1.3.4.3-2)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1]	BWP-Downlink	entry 1 Table 16.3.1.3.4.3-4	
}			
firstActiveDownlinkBWP-Id	1	Activate the RedCap-specific dedicated DL BWP	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 16.3.1.3.4.3-5	
}			
firstActiveUplinkBWP-Id	1	Activate the RedCap-specific dedicated UL BWP	
}			
}			
}			

Table 16.3.1.3.4.3-4: *BWP-Downlink* (Table 16.3.1.3.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to DLBWP.1.1 RedCap corresponding to NCD-SSB PRB index		
}			
}			
bwp-Dedicated SEQUENCE {			
nonCellDefiningSSB-r17 SEQUENCE {			
absoluteFrequencySSB-r17	ARFCN-ValueNR of NCD-SSB		
ssb-Periodicity-r17	ms80		
ssb-TimeOffset-r17	Not present		
}			
}			
}			

Table 16.3.1.3.4.3-5: *BWP-Uplink* (Table 16.3.1.3.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {	BWP-UplinkCommon		
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to ULBWP.1.1 RedCap. The starting PRB index for dedicated UL BWP is the same as the corresponding RedCap-specific dedicated DL BWP		
}			
}			
}			

16.3.1.3.5 Test requirements

Table 16.3.1.3.5-1 defines the primary level settings including test tolerances for all tests.

Table 16.3.1.3.5-1: Cell specific test parameters

Parameter		**Unit**	**Cell 1**		**Cell 2**	
			T1	**T2**	**T1**	**T2**
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf. 2.1			
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			

BWP BW	Config 1,2,4	MHz	10: $N_{RB,c}$ = 25			
	Config 3		20: $N_{RB,c}$ = 25			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1,4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1,4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC configuration for CD-SSB			SMTC.1			
SMTC configuration for NCD-SSB			SMTC.2 RedCap			
CD-SSB Configuration	Config 1,2,4		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
NCD-SSB Configuration	Config 1,2,4		SSB.6 RedCap FR1 Note 1			
	Config 3		SSB.7 RedCap FR1 Note 1			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PRACH configuration			PRACH.1 FR1			
BWP configuration	Initial DL BWP		DLBWP.0.1		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1 RedCap Note 2		DLBWP.1.1 RedCap Note 2	
	Initial UL BWP		ULBWP.0.1		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1 RedCap Note 3		ULBWP.1.1 RedCap Note 3	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS Note 4						
EPRE ratio of OCNG to OCNG DMRS Note 4						
N_{oc} Note5		dBm/15kHz	-98			
N_{oc} Note5	Config 1,2,4	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-0.64	-Infinity	-0.64
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1,2,4	dBm/SCS	-90	-90	-Infinity	-90
	Config 3	dBm/SCS	-87	-87	-Infinity	-87
Io Note6	Config 1,2,4	dBm/9.36MHz	-61.41	-58.71	-61.41	-58.71
	Config 3	dBm/18.36MHz	-58.48	-55.78	-58.48	-55.78
Propagation condition			AWGN		AWGN	
Antenna Configuration			1x1		1x1	

Note 1: NCD-SSB is configured within dedicated RedCap DL BWP and CD-SSB is configured completely outside the dedicated RedCap DL BWP.
Note 2: The starting PRB index for dedicated DL BWP corresponding to NCD-SSB PRB index;
Note 3: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to NCD-SSB PRB index;
Note 4: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The handover delay is measured from the beginning of time period T2 to the time that the UE transmit the first PRACH to Cell 2. The handover delay shall be no larger than: RRC procedure delay + $T_{interrupt}$, where:

- RRC procedure delay = 10 ms, is the RRC processing delay specified in TS 38.331 [13] clause 12,
- $T_{interrupt}$ = 282 ms, is the interruption time specified in TS 38.133 [6] clause 6.1D.1.2.

This gives a total of 292 ms.

16.3.1.4 NR SA FR1 handover with unknown target cell for 2 Rx UE

16.3.1.4.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements for 2Rx RedCap UE as specified in TS 38.133 [6] clause 6.1D.1.2.

16.3.1.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.3.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.1.4.

16.3.1.4.4 Test description

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively.

Before the test starts,

- UE is connected to Cell 1 with active DL BWP and active UL BWP
- UE is configured with *nonCellDefiningSSB-r17* under *BWP-DownlinkDedicated* which serves as the reference SSB for the serving cell. The *nonCellDefiningSSB-r17* corresponds to the NCD-SSB within the active DL BWP.

At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives an RRC handover command from the network indicating the UE to handover to cell 2 with *firstActiveDownlinkBWP-Id* configured to DL BWP and *firstActiveUplinkBWP-Id* configured to UL BWP. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

16.3.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.3.1.4.4.1-1.

Table 16.3.1.4.4.1-1: Supported test configurations

Configuration	Description
16.3.1.4-1	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.1.4-2	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.1.4-3	Source cell:NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.1.4-4	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 16.3.1.4.4.1-2.

Table 16.3.1.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 16.3.1.4.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Table 16.3.1.4.4.1-3 below.

Table 16.3.1.4.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤5	

16.3.1.4.4.2 Test procedure

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell and RedCap-specific dedicated BWP of Cell 1 is the activated BWP. The SS transmits NCD-SSB on Cell 1 with an absolute frequency (in ARFCN value and aligned with channel raster) of

$$f_{\mathrm{NCDSSB}} = f_{\mathrm{pointA}} + \frac{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}} \cdot \left[\left(f_{\mathrm{CDSSB}} - f_{\mathrm{pointA}}\right) \cdot \frac{\Delta\mathrm{F}_{\mathrm{Global}}}{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}} \right] + \frac{N_{\mathrm{SC}}^{\mathrm{SSB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}}$$

where,

- f_{CDSSB} is the absolute frequency of CD-SSB (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- f_{pointA} is the absolute frequency of Point A (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- $\Delta\mathrm{F}_{\mathrm{Global}}$ is the granularity of the global frequency raster (in kHz) specified in 38.101-1 [2] clause 5.4.2.1;- $\mathrm{SCS}_{\mathrm{SSB}}$ is the subcarrier spacing of SSB (in kHz);
- $N_{\mathrm{SC}}^{\mathrm{RB}} = 12$, is the number of subcarriers in an RB;
- $N_{\mathrm{SC}}^{\mathrm{SSB}} = 240$, is the number of subcarriers in an SSB.

2. Set the parameters according to T1 in Table 16.3.1.4.5-1.
3. Set NR Cell 2 physical cell identity = (current NR cell 2 physical cell identity + 3) mod 1008 for current iteration of the test procedure loop

4. SS shall transmit an *RRCReconfiguration* message implying handover to the RedCap-specific dedicated BWP of Cell 2.

5. At the instant when the last TTI containing the *RRCReconfiguration* message in step 4) is sent to the UE, the SS shall switch the power settings from T1 to T2 as specified in Table 16.3.1.4.5-1. T2 starts. The SS also transmits NCD-SSB on Cell 2 with an absolute frequency of f_{NCDSSB} calculated above.

6. If the UE transmits a PRACH preamble to Cell 2 satisfying the delay requirement specified in clause 16.3.1.4.5 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. After T2 expires, the SS shall

   - transmit an *RRCReconfiguration* message to cause the UE handover back to Cell 1. if the handover fails, switch off and on the UE

   or

   - switch off and on the UE.

8. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell and RedCap-specific dedicated BWP of Cell 1 is the activated BWP.

9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.3.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.3.1.4.4.3-1: *RRCReconfiguration* (Step 1, 4 and 8, test procedure)

Derivation Path: Table H.3.2-2 with condition RBConfig_KeyChange			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 16.3.1.4.4.3-2	
}			
}			
}			
}			

Table 16.3.1.4.4.3-2: *CellGroupConfig* (Table 16.3.1.4.4.3-1)

Derivation Path: Table H.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			
smtc	SMTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2 RedCap		
}			
spCellConfigDedicated	ServingCellConfig	Table 16.3.1.4.4.3-3	
}			

Table 16.3.1.4.4.3-3: *ServingCellConfig* (Table 16.3.1.4.4.3-2)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			

downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1]	BWP-Downlink	entry 1 Table 16.3.1.4.4.3-4	
}			
firstActiveDownlinkBWP-Id	1	Activate the RedCap-specific dedicated DL BWP	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 16.3.1.4.4.3-5	
}			
firstActiveUplinkBWP-Id	1	Activate the RedCap-specific dedicated UL BWP	
}			
}			
}			

Table 16.3.1.4.4.3-4: *BWP-Downlink* (Table 16.3.1.4.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to DLBWP.1.1 RedCap corresponding to NCD-SSB PRB index		
}			
}			
bwp-Dedicated SEQUENCE {			
nonCellDefiningSSB-r17 SEQUENCE {			
absoluteFrequencySSB-r17	ARFCN-ValueNR of NCD-SSB		
ssb-Periodicity-r17	ms80		
ssb-TimeOffset-r17	Not present		
}			
}			
}			

Table 16.3.1.4.4.3-5: *BWP-Uplink* (Table 16.3.1.4.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {	BWP-UplinkCommon		
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to ULBWP.1.1 RedCap. The starting PRB index for dedicated UL BWP is the same as the corresponding RedCap-specific dedicated DL BWP		

}			
}			
}			

16.3.1.4.5 Test requirement

Table 16.3.1.4.5-1 defines the primary level settings including test tolerances for all tests.

Table 16.3.1.4.5-1: Cell specific test parameters

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf. 2.1			
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
BWP BW	Config 1,2,4	MHz	10: $N_{RB,c}$ = 25			
	Config 3		20: $N_{RB,c}$ = 25			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1,4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1, 4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC configuration for CD-SSB			SMTC.1			
SMTC configuration for NCD-SSB			SMTC.2 RedCap			
CD-SSB Configuration	Config 1,2,4		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
NCD-SSB Configuration	Config 1,2,4		SSB.6 RedCap FR1 Note 1			
	Config 3		SSB.7 RedCap FR1 Note 1			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PRACH configuration			PRACH.1 FR1			
BWP configuration	Initial DL BWP		DLBWP.0.1		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1 RedCap Note 2		DLBWP.1.1 RedCap Note 2	
	Initial UL BWP		ULBWP.0.1		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1 RedCap Note 3		ULBWP.1.1 RedCap Note 3	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS Note 4						
EPRE ratio of OCNG to OCNG DMRS Note 4						

N_{oc} Note5		dBm/15kHz	-98			
N_{oc} Note5	Config 1,2,4	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	8	-0.64	-Infinity	-0.64
$\hat{E}_s/N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1,2,4	dBm/SCS	-90	-90	-Infinity	-90
	Config 3	dBm/SCS	-87	-87	-Infinity	-87
Io Note6	Config 1,2,4	dBm/9.36MHz	-61.41	-58.71	-61.41	-58.71
	Config 3	dBm/18.36MHz	-58.41	-55.71	-58.41	-55.71
Propagation condition			AWGN		AWGN	

Note 1: NCD-SSB is configured within dedicated RedCap DL BWP and CD-SSB is configured completely outside the dedicated RedCap DL BWP.
Note 2: The starting PRB index for dedicated DL BWP corresponding to NCD-SSB PRB index;
Note 3: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to NCD-SSB PRB index.
Note 4: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The handover delay is measured from the beginning of time period T2 to the time that the UE transmit the first PRACH to Cell 2. The handover delay shall be no larger than: RRC procedure delay + $T_{interrupt}$, where:

- RRC procedure delay = 10 ms, is the RRC processing delay specified in TS 38.331 [13] clause 12,
- $T_{interrupt}$ = 202 ms, is the interruption time specified in TS 38.133 [6] clause 6.1D.1.2.

This gives a total of 212 ms.

16.3.1.5 NR SA FR1-FR1 handover with unknown target cell for 1 Rx UE

16.3.1.5.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 inter frequency handover requirements for 1 Rx RedCap UE as specified in TS 38.133 [6] clause 6.1D.1.2.

16.3.1.5.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.3.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.1.5.

16.3.1.5.4 Test description

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives an RRC handover command from the network indicating the UE to handover to Cell 2 with *firstActiveDownlinkBWP-Id* configured to DL BWP and *firstActiveUplinkBWP-Id* configured to UL BWP, where cell 2's DL BWP is the Redcap specific BWP associated with NCD-SSB, then UE handover from cell 1's CD-SSB to cell 2's specific Redcap BWP associated with NCD-SSB. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

16.3.1.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.3.1.5.4.1-1.

Table 16.3.1.5.4.1-1: Supported test configurations

Configuration	Description
16.3.1.5-1	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.1.5-2	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.1.5-3	Source cell:NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.1.5-4	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 16.3.1.5.4.1-2.

Table 16.3.1.5.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 16.3.1.5.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Tables 16.3.1.5.4.1-3 and 16.3.1.5.5-1 below.

Table 16.3.1.5.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤5	

16.3.1.5.4.2 Test procedure

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 16.3.1.5.5-1.
3. Set NR Cell 2 physical cell identity = (current NR cell 2 physical cell identity + 1) mod 1008 for current iteration of the test procedure loop

4. SS shall transmit an *RRCReconfiguration* message implying handover to the RedCap-specific dedicated BWP of Cell 2.

5. At the instant when the last TTI containing the *RRCReconfiguration* message in step 4) is sent to the UE, the SS shall switch the power settings from T1 to T2 as specified in Table 16.3.1.5.5-1. T2 starts. The SS transmits NCD-SSB on Cell 2 with an absolute frequency (in ARFCN value and aligned with channel raster) of

$$f_{\mathrm{NCDSSB}} = f_{\mathrm{pointA}} + \frac{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}} \cdot \left[\left(f_{\mathrm{CDSSB}} - f_{\mathrm{pointA}}\right) \cdot \frac{\Delta\mathrm{F}_{\mathrm{Global}}}{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}} \right] + \frac{N_{\mathrm{SC}}^{\mathrm{SSB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}}$$

where,

- f_{CDSSB} is the absolute frequency of CD-SSB (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- f_{pointA} is the absolute frequency of Point A (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- $\Delta\mathrm{F}_{\mathrm{Global}}$ is the granularity of the global frequency raster (in kHz) specified in 38.101-1 [2] clause 5.4.2.1;
- $\mathrm{SCS}_{\mathrm{SSB}}$ is the subcarrier spacing of SSB (in kHz);
- $N_{\mathrm{SC}}^{\mathrm{RB}} = 12$, is the number of subcarriers in an RB;
- $N_{\mathrm{SC}}^{\mathrm{SSB}} = 240$, is the number of subcarriers in an SSB.

6. If the UE transmits a PRACH preamble to Cell 2 satisfying the delay requirement specified in clause 16.3.1.5.5 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. After T2 expires, the SS shall

   - transmit an *RRCReconfiguration* message to cause the UE handover back to Cell 1. if the handover fails, switch off and on the UE

   or

   - switch off and on the UE.

8. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.3.1.5.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.3.1.5.4.3-1: *RRCReconfiguration* (Step 4, test procedure)

Derivation Path: Table H.3.2-2 with condition RBConfig_KeyChange			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 16.3.1.5.4.3-2	
}			
}			
}			
}			

Table 16.3.1.5.4.3-2: *CellGroupConfig* (Table 16.3.1.5.4.3-1)

Derivation Path: Table H.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**

CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			
smtc	SMTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2 RedCap		
}			
spCellConfigDedicated	ServingCellConfig	Table 16.3.1.5.4.3-3	
}			

Table 16.3.1.5.4.3-3: *ServingCellConfig* (Table 16.3.1.5.4.3-2)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1]	BWP-Downlink	entry 1 Table 16.3.1.5.4.3-4	
}			
firstActiveDownlinkBWP-Id	1	Activate the RedCap-specific dedicated DL BWP	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 16.3.1.5.4.3-5	
}			
firstActiveUplinkBWP-Id	1	Activate the RedCap-specific dedicated UL BWP	
}			
}			
}			

Table 16.3.1.5.4.3-4: *BWP-Downlink* (Table 16.3.1.5.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to DLBWP.1.1 RedCap corresponding to NCD-SSB PRB index		
}			
}			
bwp-Dedicated SEQUENCE {			
nonCellDefiningSSB-r17 SEQUENCE {			
absoluteFrequencySSB-r17	ARFCN-ValueNR of NCD-SSB		
ssb-Periodicity-r17	ms80		
ssb-TimeOffset-r17	Not present		
}			
}			
}			

Table 16.3.1.5.4.3-5: *BWP-Uplink* (Table 16.3.1.5.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {	BWP-UplinkCommon		
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to ULBWP.1.1 RedCap The starting PRB index for dedicated UL BWP is the same as the corresponding RedCap-specific dedicated DL BWP		
}			
}			
}			

16.3.1.5.5 Test requirement

Table 16.3.1.5.5-1 defines the primary level settings including test tolerances for all tests.

Table 16.3.1.5.5-1: Cell specific test parameters

Parameter		**Unit**	**Cell 1**		**Cell 2**	
			T1	**T2**	**T1**	**T2**
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
BWP BW	Config 1,2,4	MHz	10: $N_{RB,c}$ = 25			
	Config 3		20: $N_{RB,c}$ = 25			
TRS configuration	Config 1,4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1,4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR. 2.1 TDD			
OCNG Patterns			OP.1			
SMTC configuration for CD-SSB			SMTC.1			
SMTC configuration for NCD-SSB			SMTC.2 RedCap			
CD-SSB Configuration	Config 1,2,4		SSB.1 FR1		N/A	
	Config 3		SSB.1 RedCap FR1		N/A	
NCD-SSB Configuration	Config 1,2,4		N/A		SSB.6 RedCap FR1 Note 4	
	Config 3		N/A		SSB.7 RedCap FR1 Note 4	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PRACH configuration			PRACH.1 FR1			
Initial DL BWP			DLBWP.0.1			
Dedicated DL BWP			DLBWP.1.1 RedCap Note 5		DLBWP.1.1 RedCap Note 6	
Initial UL BWP			ULBWP.0.1			

Dedicated UL BWP			DLBWP.1.1 RedCap Note 7		ULBWP.1.1 RedCap Note 8	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2		dBm/ 15kHz	-98		-98	
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s/I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s/N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1,2,4	dBm/SCS	-94	-94	-Infinity	-93
	Config 3	dBm/SCS	-91	-91	-Infinity	-90
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3	dBm/ 18.36MHz	-61.67	-61.67	-67.13	-60.93
Propagation condition		-	AWGN		AWGN	
Antenna Configuration			1x1			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: NCD-SSB is configured within dedicated RedCap DL BWP.
Note 5: The starting PRB index for dedicated DL BWP corresponding to CD-SSB PRB index;
Note 6: The starting PRB index for dedicated DL BWP corresponding to NCD-SSB PRB index;
Note 7: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to CD-SSB PRB index;
Note 8: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to NCD-SSB PRB index;

The handover delay is measured from the beginning of time period T2 to the time that the UE transmit the first PRACH to Cell 2. The handover delay shall be no larger than: RRC procedure delay + $T_{interrupt}$, where:

- RRC procedure delay = 10 ms, is the RRC processing delay specified in TS 38.331 [13] clause 12,
- $T_{interrupt}$ = 522 ms, is the interruption time specified in TS 38.133 [6] clause 6.1D.1.2.

This gives a total of 532 ms.

16.3.1.6 NR SA FR1-FR1 handover with unknown target cell for 2 Rx UE

16.3.1.6.1 Test purpose

To verify the requirement for the NR FR1-NR FR1 inter frequency handover requirements for 2 Rx RedCap UE as specified in TS 38.133 [6] clause 6.1D.1.2.

16.3.1.6.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.3.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.1.6.

16.3.1.6.4 Test description

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives an RRC handover command from the network indicating the UE to handover to Cell 2 with *firstActiveDownlinkBWP-Id* configured to DL BWP and *firstActiveUplinkBWP-Id* configured to UL BWP, where cell 2's DL BWP is the Redcap specific BWP associated with NCD-SSB, then UE handover from cell 1's CD-SSB to cell 2's specific Redcap BWP associated with NCD-SSB. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

16.3.1.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.3.1.6.4.1-1.

Table 16.3.1.6.4.1-1: Supported test configurations

Configuration	Description
16.3.1.6-1	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.1.6-2	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.1.6-3	Source cell:NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.1.6-4	Source cell:NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 16.3.1.6.4.1-2.

Table 16.3.1.6.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 16.3.1.6.4.3.

2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Tables 16.3.1.6.4.1-3 and 16.3.1.6.5-1 below.

Table 16.3.1.6.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤5	

16.3.1.6.4.2 Test procedure

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 16.3.1.6.5-1.

3. Set NR Cell 2 physical cell identity = (current NR cell 2 physical cell identity + 1) mod 1008 for current iteration of the test procedure loop

4. SS shall transmit an *RRCReconfiguration* message implying handover to the RedCap-specific dedicated BWP of Cell 2.

5. At the instant when the last TTI containing the *RRCReconfiguration* message in step 4) is sent to the UE, the SS shall switch the power settings from T1 to T2 as specified in Table 16.3.1.6.5-1. T2 starts. . The SS transmits NCD-SSB on Cell 2 with an absolute frequency (in ARFCN value and aligned with channel raster) of

$$f_{\mathrm{NCDSSB}} = f_{\mathrm{pointA}} + \frac{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}} \cdot \left[\left(f_{\mathrm{CDSSB}} - f_{\mathrm{pointA}}\right) \cdot \frac{\Delta\mathrm{F}_{\mathrm{Global}}}{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}} \right] + \frac{N_{\mathrm{SC}}^{\mathrm{SSB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}}$$

where,

- f_{CDSSB} is the absolute frequency of CD-SSB (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- f_{pointA} is the absolute frequency of Point A (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- $\Delta\mathrm{F}_{\mathrm{Global}}$ is the granularity of the global frequency raster (in kHz) specified in 38.101-1 [2] clause 5.4.2.1;
- $\mathrm{SCS}_{\mathrm{SSB}}$ is the subcarrier spacing of SSB (in kHz);
- $N_{\mathrm{SC}}^{\mathrm{RB}} = 12$, is the number of subcarriers in an RB;
- $N_{\mathrm{SC}}^{\mathrm{SSB}} = 240$, is the number of subcarriers in an SSB.

6. If the UE transmits a PRACH preamble to Cell 2 satisfying the delay requirement specified in clause 16.3.1.6.5 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. After T2 expires, the SS shall

   - transmit an *RRCReconfiguration* message to cause the UE handover back to Cell 1. if the handover fails, switch off and on the UE

   or

   - switch off and on the UE.

8. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.

9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.3.1.6.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.3.1.6.4.3-1: *RRCReconfiguration* (Step 4, test procedure)

Derivation Path: Table H.3.2-2 with condition RBConfig_KeyChange			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration::= SEQUENCE {			
criticalExtensions CHOICE {			

rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 16.3.1.6.4.3-2	
}			
}			
}			
}			

Table 16.3.1.6.4.3-2: *CellGroupConfig* (Table 16.3.1.6.4.3-1)

Derivation Path: Table H.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			
smtc	SMTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2 RedCap		
}			
spCellConfigDedicated	ServingCellConfig	Table 16.3.1.6.4.3-3	
}			

Table 16.3.1.6.4.3-3: *ServingCellConfig* (Table 16.3.1.6.4.3-2)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1]	BWP-Downlink	entry 1 Table 16.3.1.6.4.3-4	
}			
firstActiveDownlinkBWP-Id	1	Activate the RedCap-specific dedicated DL BWP	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 16.3.1.6.4.3-5	
}			
firstActiveUplinkBWP-Id	1	Activate the RedCap-specific dedicated UL BWP	
}			
}			
}			

Table 16.3.1.6.4.3-4: *BWP-Downlink* (Table 16.3.1.6.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to DLBWP.1.1 RedCap corresponding to NCD-SSB PRB index		
}			

}			
bwp-Dedicated SEQUENCE {			
nonCellDefiningSSB-r17 SEQUENCE {			
absoluteFrequencySSB-r17	ARFCN-ValueNR of NCD-SSB		
ssb-Periodicity-r17	ms80		
ssb-TimeOffset-r17	Not present		
}			
}			
}			

Table 16.3.1.6.4.3-5: *BWP-Uplink* (Table 16.3.1.6.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {	BWP-UplinkCommon		
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to ULBWP.1.1 RedCap. The starting PRB index for dedicated UL BWP is the same as the corresponding RedCap-specific dedicated DL BWP		
}			
}			
}			

16.3.1.6.5 Test requirement

Table 16.3.1.6.5-1 defines the primary level settings including test tolerances for all tests.

Table 16.3.1.6.5-1: Cell specific test parameters

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
BWP BW	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
TRS configuration	Config 1,4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1,4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR. 2.1 TDD			
OCNG Patterns			OP.1			
SMTC configuration for CD-SSB			SMTC.1			

SMTC configuration for NCD-SSB			SMTC.2 RedCap			
CD-SSB Configuration	Config 1,2,4		SSB.1 FR1		N/A	
	Config 3		SSB.1 RedCap FR1		N/A	
NCD-SSB Configuration	Config 1,2,4		N/A		SSB.6 RedCap FR1 Note 4	
	Config 3		N/A		SSB.7 RedCap FR1 Note 4	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PRACH configuration			PRACH.1 FR1			
Initial DL BWP			DLBWP.0.1			
Dedicated DL BWP			DLBWP.1.1 RedCap Note 5		DLBWP.1.1 RedCap Note 6	
Initial UL BWP			ULBWP.0.1			
Dedicated UL BWP			DLBWP.1.1 RedCap Note 7		ULBWP.1.1 RedCap Note 8	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2		dBm/ 15kHz	-98		-98	
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1,2,4	dBm/SCS	-94	-94	-Infinity	-93
	Config 3	dBm/SCS	-91	-91	-Infinity	-90
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3	dBm/ 18.36MHz	-61.67	-61.67	-67.13	-60.93
Propagation condition		-	AWGN		AWGN	
Antenna Configuration			1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: NCD-SSB is configured within dedicated RedCap DL BWP.

Note 5: The starting PRB index for dedicated DL BWP corresponding to CD-SSB PRB index;

Note 6: The starting PRB index for dedicated DL BWP corresponding to NCD-SSB PRB index;

Note 7: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to CD-SSB PRB index;

Note 8: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to NCD-SSB PRB index;

The handover delay is measured from the beginning of time period T2 to the time that the UE transmit the first PRACH to Cell 2. The handover delay shall be no larger than: RRC procedure delay + $T_{interrupt}$, where:

- RRC procedure delay = 10 ms, is the RRC processing delay specified in TS 38.331 [13] clause 12,
- $T_{interrupt}$ = 362 ms, is the interruption time specified in TS 38.133 [6] clause 6.1D.1.2.

This gives a total of 372 ms.

16.3.1.7 NR SA FR1 - E-UTRA handover with known target cell for 1 Rx UE

16.3.1.7.1 Test purpose

To verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall also verify the NR to E-UTRAN handover requirements as specified in 38.133 [6] clause 6.1D.2.1.

16.3.1.7.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.3.1.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.1.7.

16.3.1.7.4 Test description

16.3.1.7.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.1.4.4.1 with the following exceptions:

- Table 6.3.1.4.4.1-1 is replaced by Table 16.3.1.7.4.1-1.
- Table 6.3.1.4.4.1-2 is replaced by Table 16.3.1.7.4.1-2.
- Table 6.3.1.4.4.1-3 is replaced by Table 16.3.1.7.4.1-3

Table 16.3.1.7.4.1-1: Supported test configurations

Configuration	Description
16.3.1.7-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.3.1.7-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.1.7-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.1.7-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.3.1.7-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.1.7-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.1.7-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode, LTE FDD
16.3.1.7-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.3.1.7.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.1.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

Table 16.3.1.7.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test

LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	As specified in Table 16.3.1.7.5-1	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN		dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in 38.133 [6] Table 9.1.2-1 started before T2 starts
T1		s	5	
T2		s	≤5	
T3		s	1	

16.3.1.7.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.1.4.4.2.

16.3.1.7.4.3 Message contents

Same as the message contents specified in 6.3.1.4.4.3 with the following exceptions:

- Table 7.3.1-3 in TS 38.508-1 [14] is used with condition SMTC.1 RedCap.
- Table H.3.1-4A is replaced by Table 16.3.1.7.4.3-1.

Table 16.3.1.7.4.3-1: ReportConfigInterRAT- DEFAULT

Derivation Path: Table H.3.1-4A			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT ::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventB2 SEQUENCE {			
b2-Threshold1 CHOICE {			
rsrp	63	Actual value = 63 – 156 = -93dBm	16.3.1.7-1 16.3.1.7-2 16.3.1.7-4 16.3.1.7-5 16.3.1.7-7 16.3.1.7-8
	66	Actual value = 66 – 156 = -90dBm	16.3.1.7-3 16.3.1.7-6
}			
b2-Threshold2EUTRA CHOICE {			
rsrp	42	Actual value = 42 – 140 = -98dBm	
}			
}			
}			
}			
}			
}			

16.3.1.7.5 Test requirement

Same as the test requirements given in sub-clause 6.3.1.4.5 with following exceptions:

- Table 6.3.1.4.4.1-3 is replaced by Table 16.3.1.7.4.1-3.
- Table 6.3.1.4.5-1 is replaced by Table 16.3.1.7.5-1.
- Table 6.3.1.4.5-2 is replaced by Table 16.3.1.7.5-2.
- $T_{interrupt}$ in test requirements is specified in 38.133 [6] clause 6.1D.2.1.

Table 16.3.1.7.5-1: Cell specific test parameters (Cell 1)

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1,2,3,4,5,6,7,8	1		
Duplex mode			1,4	FDD		
			2,3,5,6	TDD		
			7,8	HD-FDD		
TDD Configuration			2,5	TDDConf.1.1		
			3,6	TDDConf.2.1		
$BW_{channel}$		MHz	1,4,7,8	10: $N_{RB,c}$ = 52 (FDD)		
			2,5	10: $N_{RB,c}$ = 52 (TDD)		
			3,6	20: $N_{RB,c}$ = 51 (TDD)		
PDSCH reference measurement channel			1,4,7,8	SR.1.1 FDD		
			2,5	SR.1.1 TDD		
			3,6	SR.2.1 TDD		
CORSET reference channel			1,4,7,8	CR.1.1 FDD		
			2,5	CR.1.1 TDD		
			3,6	CR.2.1 TDD		
TRS configuration			1,4,7,8	TRS.1.1 FDD		
			2,5	TRS.1.1 TDD		
			3,6	TRS.1.2 TDD		
OCNG pattern[Note1]			1,2,3,4,5,6,7,8	OP.1		
BWP	Initial DL BWP		1,2,3,4,5,6,7,8	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1,2,3,4,5,6,7,8	SMTC.1 RedCap		
SSB configuration			1,2,4,5,7,8	SSB.1 FR1		
			3,6	SSB.1 RedCap FR1		
b2-Threshold1[Note 4]		dBm	1,2,4,5,7,8	-93		
			3,6	-90		
EPRE ratio of PSS to SSS		dB	1,2,3,4,5,6,7,8	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1,2,3,4,5,6,7,8	-100	-104	-100
N_{oc}[Note2]		dBm/SCS	1,2,4,5,7,8	-100	-104	-100
			3,6	-97	-101	-97
$\hat{E}_s/N_{oc}$		dB	1,2,3,4,5,6,7,8	12	0	0
$\hat{E}_s/I_{ot}$[Note3]		dB	1,2,3,4,5,6,7,8	12	0	0
SS-RSRP[Note3]		dBm/SCS	1,2,4,5,7,8	-88	-104	-100
			3,6	-85	-101	-97
Io[Note3]		dBm/9.36 MHz	1,2,4,5,7,8	-59.78	-73.04	-69.04

	dBm/18.36 MHz	3,6	-56.86	-70.11	-66.11
Propagation condition		1,2,3,4,5,6,7,8	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Including test tolerance given in Annex F.

Table 16.3.1.7.5-2: Cell specific test parameters (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1,2,3,4,5,6,7,8	2		
Duplex mode		1,2,3,7	FDD		
		4,5,6,8	TDD		
TDD special subframe configuration[Note1]		4,5,6,8	6		
TDD uplink-downlink configuration[Note1]		4,5,6,8	1		
$BW_{channel}$	MHz	1,2,3,4,5,6,7,8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1,2,3,7	4		
		4,5,6,8	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4,5,6,8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4,5,6,8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1,2,3,7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4,5,6,8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1,2,3,4,5,6,7,8	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1,2,3,4,5,6,7,8	-98		
$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6,7,8	-Infinity	10.55	8
$\hat{E}_s/I_{ot}$[Note6]	dB	1,2,3,4,5,6,7,8	-Infinity	10.55	8
RSRP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-87.45	-90
SCH_RP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-87.45	-90
Io[Note6]	dBm/9MHz	1,2,3,4,5,6,7,8	-67.21	-56.29	-58.57

			+10log($N_{RB,c}$/100)	+10log($N_{RB,c}$/100)	+10log($N_{RB,c}$/100)
Propagation Condition		1,2,3,4,5,6,7,8	AWGN		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [24].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

16.3.1.8 NR SA FR1 - E-UTRA handover with known target cell for 2 Rx UE

16.3.1.8.1 Test purpose

To verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall also verify the NR to E-UTRAN handover requirements as specified in 38.133 [6] clause 6.1D.2.1.

16.3.1.8.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.3.1.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.1.8.

16.3.1.8.4 Test description

16.3.1.8.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.1.4.4.1 with the following exceptions:

- Table 6.3.1.4.4.1-1 is replaced by Table 16.3.1.8.4.1-1.
- Table 6.3.1.4.4.1-2 is replaced by Table 16.3.1.8.4.1-2.
- Table 6.3.1.4.4.1-3 is replaced by Table 16.3.1.8.4.1-3

Table 16.3.1.8.4.1-1: Supported test configurations

Configuration	Description
16.3.1.8-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.3.1.8-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.1.8-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.1.8-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.3.1.8-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.1.8-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.1.8-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode, LTE FDD
16.3.1.8-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.3.1.8.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 16.3.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

Table 16.3.1.8.4.1-3: General test parameters

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	As specified in Table 16.3.1.8.5-2	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN		dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in 38.133 [6] Table 9.1.2-1 started before T2 starts
T1		s	5	
T2		s	≤5	
T3		s	1	

16.3.1.8.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.1.4.4.2.

16.3.1.8.4.3 Message contents

Same as the message contents specified in 6.3.1.4.4.3 with the following exceptions:

- Table 7.3.1-3 in TS 38.508-1 [14] is used with condition SMTC.1 RedCap.

16.3.1.8.5 Test requirement

Same as the test requirements given in sub-clause 6.3.1.4.5 with following exceptions:

- Table 6.3.1.4.4.1-3 is replaced by Table 16.3.1.8.4.1-3.
- Table 6.3.1.4.5-1 is replaced by Table 16.3.1.8.5-1.
- Table 6.3.1.4.5-2 is replaced by Table 16.3.1.8.5-2.
- $T_{interrupt}$ in test requirements is specified in 38.133 [6] clause 6.1D.2.1.

Table 16.3.1.8.5-1: Cell specific test parameters (Cell 1)

Parameter	Unit	Configuration	Cell 1

				T1	T2	T3
RF channel number			1,2,3,4,5,6,7,8	1		
Duplex mode			1,4	FDD		
			2,3,5,6	TDD		
			7,8	HD-FDD		
TDD Configuration			2,5	TDDConf.1.1		
			3,6	TDDConf.2.1		
$BW_{channel}$		MHz	1,4,7,8	10: $N_{RB,c}$ = 52 (FDD)		
			2,5	10: $N_{RB,c}$ = 52 (TDD)		
			3,6	20: $N_{RB,c}$ = 51 (TDD)		
PDSCH reference measurement channel			1,4,7,8	SR.1.1 FDD		
			2,5	SR.1.1 TDD		
			3,6	SR.2.1 TDD		
CORSET reference channel			1,4,7,8	CR.1.1 FDD		
			2,5	CR.1.1 TDD		
			3,6	CR.2.1 TDD		
TRS configuration			1,4,7,8	TRS.1.1 FDD		
			2,5	TRS.1.1 TDD		
			3,6	TRS.1.2 TDD		
OCNG pattern[Note1]			1,2,3,4,5,6,7,8	OP.1		
BWP	Initial DL BWP		1,2,3,4,5,6,7,8	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1,2,3,4,5,6,7,8	SMTC.1 RedCap		
SSB configuration			1,2,4,5,7,8	SSB.1 FR1		
			3,6	SSB.1 RedCap FR1		
b2-Threshold1		dBm	1,2,4,5,7,8	-94		
			3,6	-91		
EPRE ratio of PSS to SSS		dB	1,2,3,4,5,6,7,8	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1,2,3,4,5,6,7,8	-100	-104	-100
N_{oc}[Note2]		dBm/SCS	1,2,4,5,7,8	-100	-104	-100
			3,6	-97	-101	-97
$\hat{E}_s/N_{oc}$		dB	1,2,3,4,5,6,7,8	12	0	0
$\hat{E}_s/I_{ot}$[Note3]		dB	1,2,3,4,5,6,7,8	12	0	0
SS-RSRP[Note3]		dBm/SCS	1,2,4,5,7,8	-88	-104	-100
			3,6	-85	-101	-97
Io[Note3]		dBm/9.36 MHz	1,2,4,5,7,8	-59.78	-73.04	-69.04
		dBm/18.36 MHz	3,6	-56.86	-70.11	-66.11
Propagation condition			1,2,3,4,5,6,7,8	AWGN		
Antenna Configuration and Correlation Matrix			1,2,3,4,5,6,7.8	1x2 Low		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.3.1.8.5-2: Cell specific test parameters (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1,2,3,4,5,6,7,8	2		
Duplex mode		1,2,3,7	FDD		
		4,5,6,8	TDD		
TDD special subframe configuration[Note1]		4,5,6,8	6		
TDD uplink-downlink configuration[Note1]		4,5,6,8	1		
$BW_{channel}$	MHz	1,2,3,4,5,6,7,8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1,2,3,7	4		
		4,5,6,8	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4,5,6,8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4,5,6,8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1,2,3,7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4,5,6,8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1,2,3,4,5,6,7,8	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note4]					
OCNG_RB[Note4]					
N_{oc}[Note5]	dBm/15kHz	1,2,3,4,5,6,7,8	-98		
$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6,7,8	-Infinity	9.55	9.55
$\hat{E}_s/I_{ot}$[Note6]	dB	1,2,3,4,5,6,7,8	-Infinity	9.55	9.55
RSRP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-88.45	-88.45
SCH_RP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-88.45	-88.45
Io[Note6]	dBm/ChBW	1,2,3,4,5,6,7,8	-67.21+10log($N_{RB,c}$/100)	-57.20+10log($N_{RB,c}$/100)	-57.20+10log($N_{RB,c}$/100)
Propagation Condition		1,2,3,4,5,6,7,8	AWGN		

Antenna Configuration and Correlation Matrix Note7		1,2,3,4,5,6,7,8	1x2 Low

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [24].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

16.3.1.9 NR SA FR1 - E-UTRA handover with unknown target cell for 1 Rx UE

16.3.1.9.1 Test purpose

To verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall also verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in 38.133 [6] clause 6.1D.2.1.

16.3.1.9.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.3.1.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.1.9.

16.3.1.9.4 Test description

16.3.1.9.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.1.5.4.1 with the following exceptions:

- Table 6.3.1.5.4.1-1 is replaced by Table 16.3.1.9.4.1-1.
- Table 6.3.1.5.4.1-2 is replaced by Table 16.3.1.9.4.1-2.
- Table 6.3.1.5.4.1-3 is replaced by Table 16.3.1.9.4.1-3

Table 16.3.1.9.4.1-1: Supported test configurations

Configuration	Description
16.3.1.9-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.3.1.9-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.1.9-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.1.9-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.3.1.9-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.1.9-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.1.9-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode, LTE FDD
16.3.1.9-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.3.1.9.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.

Test frequencies	As specified in Annex E, Table E.14-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.1.9.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

Table 16.3.1.9.4.1-3: General test parameters

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
T1		s	≤5	
T2		s	1	

16.3.1.9.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.1.5.4.2.

16.3.1.9.4.3 Message contents

Same as the message contents specified in 6.3.1.5.4.3.

16.3.1.9.5 Test requirement

Same as the test requirements given in sub-clause 6.3.1.5.5 with following exceptions:

- Table 6.3.1.5.4.1-3 is replaced by Table 16.3.1.9.4.1-3.
- Table 6.3.1.5.5-1 is replaced by Table 16.3.1.9.5-1.
- Table 6.3.1.5.5-2 is replaced by Table 16.3.1.9.5-2.
- $T_{interrupt}$ in test requirements is specified in 38.133 [6] clause 6.1D.2.1.

Table 16.3.1.9.5-1: Cell specific test parameters (Cell 1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1,2,3,4,5,6,7,8	1	
Duplex mode		1,4	FDD	
		2,3,5,6	TDD	
		7,8	HD-FDD	
TDD Configuration		2,5	TDDConf.1.1	
		3,6	TDDConf.2.1	
$BW_{channel}$	MHz	1,4,7,8	10: $N_{RB,c}$ = 52 (FDD)	
		2,5	10: $N_{RB,c}$ = 52 (TDD)	
		3,6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel		1,4,7,8	SR.1.1 FDD	

			2,5	SR.1.1 TDD	
			3,6	SR.2.1 TDD	
CORSET reference channel			1,4,7,8	CR.1.1 FDD	
			2,5	CR.1.1 TDD	
			3,6	CR.2.1 TDD	
TRS configuration			1,4,7,8	TRS.1.1 FDD	
			2,5	TRS.1.1 TDD	
			3,6	TRS.1.2 TDD	
OCNG pattern[Note1]			1,2,3,4,5,6,7,8	OP.1	
BWP	Initial DL BWP		1,2,3,4,5,6,7,8	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1,2,3,4,5,6,7,8	SMTC.1 RedCap	
SSB configuration			1,2,4,5,7,8	SSB.1 FR1	
			3,6	SSB.1 RedCap FR1	
EPRE ratio of PSS to SSS		dB	1,2,3,4,5,6,7,8	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1,2,3,4,5,6,7,8	-98	
N_{oc}[Note2]		dBm/SCS	1,2,4,5,7,8	-98	
			3,6	-95	
$\hat{E}_s/N_{oc}$		dB	1,2,3,4,5,6,7,8	0	0
$\hat{E}_s/I_{ot}$[Note3]		dB	1,2,3,4,5,6,7,8	0	0
SS-RSRP[Note3]		dBm/SCS	1,2,4,5,7,8	-98	-98
			3,6	-95	-95
Io[Note3]		dBm/9.36 MHz	1,2,4,5,7,8	-67.04	-67.04
		dBm/38.16 MHz	3,6	-64.12	-64.12
Propagation condition			1,2,3,4,5,6,7,8	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.3.1.9.5-2: Cell specific test parameters (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1,2,3,4,5,6,7,8	2	
Duplex mode		1,2,3,7	FDD	
		4,5,6,8	TDD	
TDD special subframe configuration[Note1]		4,5,6,8	6	
TDD uplink-downlink configuration[Note1]		4,5,6,8	1	
$BW_{channel}$	MHz	1,2,3,4,5,6,7,8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1,2,3,7	4	
		4,5,6,8	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	

		4,5,6,8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4,5,6,8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1,2,3,7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4,5,6,8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1,2,3,4,5,6,7,8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1,2,3,4,5,6,7,8	-98	
$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6,7,8	-Infinity	7
$\hat{E}_s/I_{ot}$[Note6]	dB	1,2,3,4,5,6,7,8	-Infinity	7
RSRP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-91
SCH_RP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-91
Io[Note6]	dBm/9MHz	1,2,3,4,5,6,7,8	-70.22	-62.43
Propagation Condition		1,2,3,4,5,6,7,8	AWGN	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [24].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

16.3.1.10 NR SA FR1 - E-UTRA handover with unknown target cell for 2 Rx UE

16.3.1.10.1 Test purpose

To verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall also verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in 38.133 [6] clause 6.1D.2.1.

16.3.1.10.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.3.1.10.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.1.10.

16.3.1.10.4 Test description

16.3.1.10.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.1.5.4.1 with the following exceptions:

- Table 6.3.1.5.4.1-1 is replaced by Table 16.3.1.10.4.1-1.
- Table 6.3.1.5.4.1-2 is replaced by Table 16.3.1.10.4.1-2.
- Table 6.3.1.5.4.1-3 is replaced by Table 16.3.1.10.4.1-3

Table 16.3.1.10.4.1-1: Supported test configurations

Configuration	Description
16.3.1.10-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.3.1.10-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.1.10-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.1.10-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.3.1.10-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.1.10-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.1.10-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode, LTE FDD
16.3.1.10-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.3.1.10.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.1.10.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram	N/A		

Table 16.3.1.10.4.1-3: General test parameters

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2	E-UTRAN cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
T1		s	≤5	
T2		s	1	

16.3.1.10.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.1.5.4.2.

16.3.1.10.4.3 Message contents

Same as the message contents specified in 6.3.1.5.4.3.

16.3.1.10.5 Test requirement

Same as the test requirements given in sub-clause 6.3.1.5.5 with following exceptions:

- Table 6.3.1.5.4.1-3 is replaced by Table 16.3.1.10.4.1-3.
- Table 6.3.1.5.5-1 is replaced by Table 16.3.1.10.5-1.
- Table 6.3.1.5.5-2 is replaced by Table 16.3.1.10.5-2.
- $T_{interrupt}$ in test requirements is specified in 38.133 [6] clause 6.1D.2.1.

Table 16.3.1.10.5-1: Cell specific test parameters (Cell 1)

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1,2,3,4,5,6,7,8	1	
Duplex mode			1,4	FDD	
			2,3,5,6	TDD	
			7,8	HD-FDD	
TDD Configuration			2,5	TDDConf.1.1	
			3,6	TDDConf.2.1	
$BW_{channel}$		MHz	1,4,7,8	10: $N_{RB,c}$ = 52 (FDD)	
			2,5	10: $N_{RB,c}$ = 52 (TDD)	
			3,6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel		0	1,4,7,8	SR.1.1 FDD	
			2,5	SR.1.1 TDD	
			3,6	SR.2.1 TDD	
CORSET reference channel			1,4,7,8	CR.1.1 FDD	
			2,5	CR.1.1 TDD	
			3,6	CR.2.1 TDD	
TRS configuration			1,4,7,8	TRS.1.1 FDD	
			2,5	TRS.1.1 TDD	
			3,6	TRS.1.2 TDD	
OCNG pattern[Note1]			1,2,3,4,5,6,7,8	OP.1	
BWP	Initial DL BWP		1,2,3,4,5,6,7,8	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1,2,3,4,5,6,7,8	SMTC.1 RedCap	
SSB configuration			1,2,4,5,7,8	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
EPRE ratio of PSS to SSS		dB	1,2,3,4,5,6,7,8	0	
EPRE ratio of PBCH-DMRS to SSS					
EPRE ratio of PBCH to PBCH-DMRS					
EPRE ratio of PDCCH-DMRS to SSS					
EPRE ratio of PDCCH to PDCCH-DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH-DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1,2,3,4,5,6,7,8	-98	
N_{oc}[Note2]		dBm/SCS	1,2,4,5,7,8	-98	
			3,6	-95	
$\hat{E}_s/N_{oc}$		dB	1,2,3,4,5,6,7,8	0	0
$\hat{E}_s/I_{ot}$[Note3]		dB	1,2,3,4,5,6,7,8	0	0
SS-RSRP[Note3]		dBm/SCS	1,2,4,5,7,8	-98	-98
			3,6	-95	-95
Io[Note3]		dBm/9.36 MHz	1,2,4,5,7,8	-67.04	-67.04

	dBm/18.36 MHz	3,6	-64.12	-64.12
Propagation condition		1,2,3,4,5,6,7,8	AWGN	
Antenna Configuration and Correlation Matrix		1,2,3,4,5,6,7,8	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.3.1.10.5-2: Cell specific test parameters (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1,2,3,4,5,6,7,8	2	
Duplex mode		1,2,3,7	FDD	
		4,5,6,8	TDD	
TDD special subframe configuration[Note1]		4,5,6,8	6	
TDD uplink-downlink configuration[Note1]		4,5,6,8	1	
$BW_{channel}$	MHz	1,2,3,4,5,6,7,8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1,2,3,7	4	
		4,5,6,8	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4,5,6,8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4,5,6,8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1,2,3,7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4,5,6,8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1,2,3,4,5,6,7,8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1,2,3,4,5,6,7,8	-98	
$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6,7,8	-Infinity	7
$\hat{E}_s/I_{ot}$[Note6]	dB	1,2,3,4,5,6,7,8	-Infinity	7
RSRP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-91
SCH_RP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-91
Io[Note6]	dBm/9MHz	1,2,3,4,5,6,7,8	-70.22	-62.43
Propagation Condition		1,2,3,4,5,6,7,8	AWGN	

Antenna Configuration and Correlation Matrix Note7		1,2,3,4,5,6,7,8	1x2 Low

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [24].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

16.3.2 RRC connection mobility control for RedCap

16.3.2.1 RRC re-establishment for RedCap

16.3.2.1.0 Minimum conformance requirements

16.3.2.1.0.1 Minimum conformance requirements for FR1 RRC re-establishment

The requirements in clause 6.3.2.1.0.1 shall apply when RedCap UE is capable of 2 Rx.

When UE is only required to support 1 Rx antenna, the requirements defined in clause 6.3.2.1.0.1 shall apply except that:

- $T_{identify_intra_NR}$ as specified in Table 16.3.2.1.0.1-1.
- $T_{identify_inter_NR,\ i}$ as specified in Table 16.3.2.1.0.1-2.

Table 16.3.2.1.0.1-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell

Serving cell SSB $\hat{E}s/Iot$ (dB)	FR of target NR cell	$T_{identify_intra_NR}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 6 x T_{SMTC})	MAX (800 ms, [11] x T_{SMTC})
< -8	FR1	N/A	800 Note1

Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when T_{SMTC} > 20 ms and serving cell SSB $\hat{E}s/Iot$ < -8 dB.

Table 16.3.2.1.0.1-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell

Serving cell SSB $\hat{E}s/Iot$ (dB)	FR of target NR cell	$T_{identify_inter_NR,\ i}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, 7 x $T_{SMTC,\ i}$)	MAX (800 ms, [14] x $T_{SMTC,\ i}$)
< -8	FR1	N/A	800 Note1

Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{SMTC,i}$ > 20 ms and serving cell SSB $\hat{E}s/Iot$ < -8 dB.

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.1B.

16.3.2.1.1 NR SA FR1 RRC Re-establishment for 1 Rx UE

16.3.2.1.1.1 Test purpose

To verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. This test will verify the requirements in 38.133 [6] clause 6.2.1B.

16.3.2.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

16.3.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.1.1.

16.3.2.1.1.4 Test description

16.3.2.1.1.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.1.1.4.1 with following exceptions:

- Table 6.3.2.1.1.4.1-1 is replaced by Table 16.3.2.1.1.4.1-1.
- Table 6.3.2.1.1.4.1-2 is replaced by Table 16.3.2.1.1.4.1-2.
- Table 6.3.2.1.1.4.1-3 is replaced by Table 16.3.2.1.1.4.1-3

Table 16.3.2.1.1.4.1-1: Supported test configurations

Configuration	Description
16.3.2.1.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.1.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.1.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.1.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.3.2.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.3.2.1.1.4.1-3: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3,4	Cell1	
	Neighbour cells		1,2,3,4	Cell2	
Final condition	Active cell		1,2,3,4	Cell2	
RF Channel Number			1,2,3,4	1	
Time offset between cells			1,4	3 ms	Asynchronous cells
			2,3	3 μs	Synchronous cells
N310		-	1,2,3,4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3,4	1	Minimum consecutive in-sync indications from lower layers

T310	ms	1,2,3,4	0	Radio link failure timer;
T311	ms	1,2,3,4	3000	RRC re-establishment timer
Access Barring Information	-	1,2,3,4	Not Sent	No additional delays in random access procedure.
SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1,4	SMTC.2	
		2,3	SMTC.1	
DRX cycle length	s	1,2,3,4	OFF	
PRACH configuration		1,2,3,4	PRACH.1 FR1	Table A.7.1-1
T1	s	1,2,3,4	5	
T2	ms	1,2,3,4	440	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133 [6], T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133[6])
T3	s	1,2,3,4	2	

16.3.2.1.1.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.1.1.4.2 with the following exception:

- Step 7 is replaced by

7. If the UE starts to send PRACH preambles to cell 2 for sending the RRCReestablishmentRequest message to cell 2 within 2040 ms (= 420ms + 1.6 s) from the beginning of time period T2, then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

16.3.2.1.1.4.3 Message contents

Same as the message contents given in 6.3.2.1.1.4.3 with the following exceptions:

- Table 7.3.1-3 in 38.508-1 [14] is used with condition SMTC.2 for Test Configuration 16.3.2.1.1-4.

16.3.2.1.1.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.1.1.5 with following exceptions:

- Table 6.3.2.1.1.5-1 is replaced by Table 16.3.2.1.1.5-1.

Table 16.3.2.1.1.5-1: Cell specific test parameters

Parameter	Unit	Test config	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1,4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1,4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1,4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1,2,3,4	OP.1			OP.1		
TRS configuration		1,4	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		

Initial DL BWP configuration		1,2,3,4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3,4	ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		1,2,3,4	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1,2,3,4	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		1,2,3,4	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	1.54	-infinity	-infinity	-3.79	4	4
N_{oc} Note2	dBm/SCS	1,2,4	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1,2,3,4	-98					
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	7	-infinity	-infinity	4	4	4
SS-RSRP Note3	dBm/SCS	1,2,4	-91	-infinity	-infinity	-94	-94	-94
		3	-88	-infinity	-infinity	-91	-91	-91
Io	dBm/9.36 MHz	1,2,4	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/18.36 MHz	3	-57.81	-61.66	-61.66	-57.81	-61.66	-61.66
Propagation Condition		1,2,3,4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

- RRC re-establishment delay allows for 2040 ms (440 ms + 1.6 s) from the beginning of T2 in the test case.

16.3.2.1.2 NR SA FR1 RRC Re-establishment for 2 Rx UE

16.3.2.1.2.1 Test purpose

To verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. This test will verify the requirements in 38.133 [6] clause 6.2.1B.

16.3.2.1.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

16.3.2.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.1.2.

16.3.2.1.2.4 Test description

16.3.2.1.2.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.1.1.4.1 with following exceptions:

- Table 6.3.2.1.1.4.1-1 is replaced by Table 16.3.2.1.2.4.1-1.
- Table 6.3.2.1.1.4.1-2 is replaced by Table 16.3.2.1.2.4.1-2.
- Table 6.3.2.1.1.4.1-3 is replaced by Table 16.3.2.1.2.4.1-3

Table 16.3.2.1.2.4.1-1: Supported test configurations

Configuration	Description
16.3.2.1.2-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.1.2-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.1.2-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.1.2-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.3.2.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

Table 16.3.2.1.2.4.1-3: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3,4	Cell1	
	Neighbour cells		1,2,3,4	Cell2	
Final condition	Active cell		1,2,3,4	Cell2	
RF Channel Number			1,2,3,4	1	
Time offset between cells			1,4	3 ms	Asynchronous cells
			2,3	3 μs	Synchronous cells
N310		-	1,2,3,4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3,4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1,2,3,4	0	Radio link failure timer;
T311		ms	1,2,3,4	3000	RRC re-establishment timer
Access Barring Information		-	1,2,3,4	Not Sent	No additional delays in random access procedure.
SSB configuration			1,2,4	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1,4	SMTC.2	
			2,3	SMTC.1	
DRX cycle length		s	1,2,3,4	OFF	
PRACH configuration			1,2,3,4	PRACH.1 FR1	Table A.7.1-1
T1		s	1,2,3,4	5	
T2		ms	1,2,3,4	240	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133 [6], T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133[6])
T3		s	1,2,3,4	2	

16.3.2.1.2.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.1.1.4.2.

16.3.2.1.2.4.3 Message contents

Same as the message contents given in 6.3.2.1.1.4.3 with the following exceptions:

- Table 7.3.1-3 in 38.508-1 [14] is used with condition SMTC.2 for Test Configuration 16.3.2.1.2-4.

16.3.2.1.2.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.1.1.5 with following exceptions:

- Table 6.3.2.1.1.5-1 is replaced by Table 16.3.2.1.2.5-1.

Table 16.3.2.1.2.5-1: Cell specific test parameters

Parameter	Unit	Test config	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1,4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1,4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1,4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1,2,3,4	OP.1			OP.1		
TRS configuration		1,4	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
Initial DL BWP configuration		1,2,3,4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3,4	ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		1,2,3,4	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1,2,3,4	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		1,2,3,4	SSB			SSB		
$\hat{E}_s / I_{ot}$	dB	1,2,3,4	1.54	-infinity	-infinity	-3.79	4	4
N_{oc} Note2	dBm/SCS	1,2,4	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1,2,3,4	-98					
$\hat{E}_s / N_{oc}$	dB	1,2,3,4	7	-infinity	-infinity	4	4	4
SS-RSRP Note3	dBm/SCS	1,2,4	-91	-infinity	-infinity	-94	-94	-94
		3	-88	-infinity	-infinity	-91	-91	-91
Io	dBm/9.36 MHz	1,2,4	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/18.36 MHz	3	-57.81	-61.66	-61.66	-57.81	-61.66	-61.66
Propagation Condition		1,2,3,4	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.3.2.1.3 NR SA FR1-FR1 RRC Re-establishment for 1 Rx UE

16.3.2.1.3.1 Test purpose

To verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. This test will verify the requirements in 38.133 [6] clause 6.2.1B.

16.3.2.1.3.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

16.3.2.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.1.3.

16.3.2.1.3.4 Test description

16.3.2.1.3.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.1.2.4.1 with following exceptions:

- Table 6.3.2.1.2.4.1-1 is replaced by Table 16.3.2.1.3.4.1-1.
- Table 6.3.2.1.2.4.1-2 is replaced by Table 16.3.2.1.3.4.1-2.
- Table 6.3.2.1.1.4.1-3 is replaced by Table 16.3.2.1.3.4.1-3

Table 16.3.2.1.3.4.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
16.3.2.1.3-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.1.3-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.1.3-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.1.3-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table 16.3.2.1.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	

Exceptions to connection diagram		

Table 16.3.2.1.3.4.1-3: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3,4	Cell1	
	Neighbour cells		1,2,3,4	Cell2	
Final condition	Active cell		1,2,3,4	Cell2	
RF Channel Number			1,2,3,4	1,2	
Time offset between cells			1,4	3 ms	Asynchronous cells
			2,3	3 μs	Synchronous cells
N310		-	1,2,3,4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3,4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1,2,3,4	0	Radio link failure timer;
T311		ms	1,2,3,4	5000	RRC re-establishment timer
Access Barring Information		-	1,2,3,4	Not Sent	No additional delays in random access procedure.
SSB configuration			1,2,4	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1,4	SMTC.2	
			2,3	SMTC.1	
DRX cycle length		s	1,2,3,4	OFF	
PRACH configuration			1,2,3,4	PRACH.1 FR1	Table A.7.1-1
T1		s	1,2,3,4	5	
T2		ms	1,2,3,4	440	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133 [6], T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133[6])
T3		s	1,2,3,4	5	

16.3.2.1.3.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.1.2.4.2.

16.3.2.1.3.4.3 Message contents

Same as the message contents given in 6.3.2.1.2.4.3 with the following exceptions:

- Table 7.3.1-3 in 38.508-1 [14] is used with condition SMTC.2 for Test Configuration 16.3.2.1.3-4.

16.3.2.1.3.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.1.2.5 with following exceptions:

- Table 6.3.2.1.2.5-1 is replaced by Table 16.3.2.1.3.5-1.

Table 16.3.2.1.3.5-1: Cell specific test parameters

Parameter	Unit	Test config	Cell 1	Cell 2

			T1	T2	T3	T1	T2	T3
RF Channel Number		1,2,3,4	1			2		
TDD configuration		1,4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1,4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1,4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1,2,3,4	OP.1			OP.1		
TRS configuration		1,4	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
Initial DL BWP configuration		1,2,3,4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3,4	ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		1,2,3,4	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1
Active UL BWP configuration		1,2,3,4	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBWP.1.1
RLM-RS		1,2,3,4	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	4	-infinity	-infinity	-infinity	-infinity	7
N_{oc} Note2	dBm/SCS	1,2,4	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1,2,3,4	-98					
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	4	-infinity	-infinity	-infinity	-infinity	7
SS-RSRP Note3	dBm/SCS	1,2,4	-94	-infinity	-infinity	-infinity	-infinity	-91
		3	-91	-infinity	-infinity	-infinity	-infinity	-88
Io	dBm/9.36 MHz	1,2,4	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/18.36 MHz	3	-61.66	-67.12	-67.12	-67.12	-67.12	-59.33
Propagation Condition		1,2,3,4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.3.2.1.4 NR SA FR1-FR1 RRC Re-establishment for 2 Rx UE

16.3.2.1.4.1 Test purpose

To verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. This test will verify the requirements in 38.133 [6] clause 6.2.1B.

16.3.2.1.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

16.3.2.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.1.4.

16.3.2.1.4.4 Test description

16.3.2.1.4.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.1.2.4.1 with following exceptions:

- Table 6.3.2.1.2.4.1-1 is replaced by Table 16.3.2.1.4.4.1-1.
- Table 6.3.2.1.2.4.1-2 is replaced by Table 16.3.2.1.4.4.1-2.
- Table 6.3.2.1.2.4.1-3 is replaced by Table 16.3.2.1.4.4.1-3

Table 16.3.2.1.4.4.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
16.3.2.1.4-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.1.4-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.1.4-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.1.4-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table 16.3.2.1.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

Table 16.3.2.1.4.4.1-3: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3,4	Cell1	
	Neighbour cells		1,2,3,4	Cell2	
Final condition	Active cell		1,2,3,4	Cell2	
RF Channel Number			1,2,3,4	1,2	
Time offset between cells			1,4	3 ms	Asynchronous cells
			2,3	3 μs	Synchronous cells
N310		-	1,2,3,4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3,4	1	Minimum consecutive in-sync indications from lower layers

T310	ms	1,2,3,4	0	Radio link failure timer;
T311	ms	1,2,3,4	5000	RRC re-establishment timer
Access Barring Information	-	1,2,3,4	Not Sent	No additional delays in random access procedure.
SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1,4	SMTC.2	
		2,3	SMTC.1	
DRX cycle length	s	1,2,3,4	OFF	
PRACH configuration		1,2,3,4	PRACH.1 FR1	Table A.7.1-1
T1	s	1,2,3,4	5	
T2	ms	1,2,3,4	240	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133 [6], T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133[6])
T3	s	1,2,3,4	5	

16.3.2.1.4.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.1.2.4.2.

16.3.2.1.4.4.3 Message contents

Same as the message contents given in 6.3.2.1.2.4.3 with the following exceptions:

- Table 7.3.1-3 in 38.508-1 [14] is used with condition SMTC.2 for Test Configuration 16.3.2.1.4-4.

16.3.2.1.4.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.1.2.5 with following exceptions:

- Table 6.3.2.1.2.5-1 is replaced by Table 16.3.2.1.4.5-1.

Table 16.3.2.1.4.5-1: Cell specific test parameters

Parameter	Unit	Test config	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
RF Channel Number		1,2,3,4	1			2		
TDD configuration		1,4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1,4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1,4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1,2,3,4	OP.1			OP.1		
TRS configuration		1,4	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
Initial DL BWP configuration		1,2,3,4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3,4	ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		1,2,3,4	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBWP.1.1

Active UL BWP configuration		1,2,3,4	ULBW P.1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
RLM-RS		1,2,3,4	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	4	-infinity	-infinity	-infinity	-infinity	7
N_{oc} Note2	dBm/SCS	1,2,4	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1,2,3,4	-98					
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	4	-infinity	-infinity	-infinity	-infinity	7
SS-RSRP Note3	dBm/SCS	1,2,4	-94	-infinity	-infinity	-infinity	-infinity	-91
		3	-91	-infinity	-infinity	-infinity	-infinity	-88
Io	dBm/9.36 MHz	1,2,4	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/18.36 MHz	3	-61.66	-67.12	-67.12	-67.12	-67.12	-59.33
Propagation Condition		1,2,3,4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.3.2.1.5 NR SA FR1 RRC Re-establishment for 1 Rx UE without serving cell timing

16.3.2.1.5.1 Test purpose

To verify that the NR intra-frequency RRC re-establishment delay in FR1 without serving cell timing is within the specified limits. This test will verify the requirements in 38.133 [6] clause 6.2.1B.

16.3.2.1.5.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

16.3.2.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.1.5.

16.3.2.1.5.4 Test description

16.3.2.1.5.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.1.3.4.1 with following exceptions:

- Table 6.3.2.1.3.4.1-1 is replaced by Table 16.3.2.1.5.4.1-1.
- Table 6.3.2.1.3.4.1-2 is replaced by Table 16.3.2.1.5.4.1-2.
- Table 6.3.2.1.1.4.1-3 is replaced by Table 16.3.2.1.5.4.1-3

Table 16.3.2.1.5.4.1-1: Supported test configurations

Configuration	Description
16.3.2.1.5-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.1.5-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.1.5-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.1.5-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.3.2.1.5.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.3.2.1.5.4.1-3: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3,4	Cell1	
	Neighbour cells		1,2,3,4	Cell2	
Final condition	Active cell		1,2,3,4	Cell2	
RF Channel Number			1,2,3,4	1	
Time offset between cells			1,4	3 ms	Asynchronous cells
			2,3	3 μs	Synchronous cells
N310		-	1,2,3,4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3,4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1,2,3,4	6000	Radio link failure timer;
T311		ms	1,2,3,4	3000	RRC re-establishment timer
Access Barring Information		-	1,2,3,4	Not Sent	No additional delays in random access procedure.
SSB configuration			1,2,4	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1,4	SMTC.2	
			2,3	SMTC.1	
DRX cycle length		s	1,2,3,4	OFF	
PRACH configuration			1,2,3,4	PRACH.1 FR1	Table A.7.1-1
T1		s	1,2,3,4	5	
T2		s	1,2,3,4	6.24	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133 [6], T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133[6])
T3		s	1,2,3,4	3	

16.3.2.1.5.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.1.3.4.2.

16.3.2.1.5.4.3 Message contents

Same as the message contents given in 6.3.2.1.3.4.3 with the following exceptions:

- Table 7.3.1-3 in 38.508-1 [14] is used with condition SMTC.2 for Test Configuration 16.3.2.1.5-4.

16.3.2.1.5.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.1.3.5 with following exceptions:

- Table 6.3.2.1.3.5-1 is replaced by Table 16.3.2.1.5.5-1.

Table 16.3.2.1.5.5-1: Cell specific test parameters

Parameter	Unit	Test config	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1,4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1,4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1,4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1,2,3,4	OP.1			OP.1		
TRS configuration		1,4	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
Initial DL BWP configuration		1,2,3,4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3,4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1,2,3,4	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	4	-infinity	-infinity	-infinity	-infinity	4
N_{oc} Note2	dBm/SCS	1,2,4	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1,2,3,4	-98					
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	4	-infinity	-infinity	-infinity	-infinity	4
SS-RSRP Note3	dBm/SCS	1,2,4	-94	-infinity	-infinity	-infinity	-infinity	-94
		3	-91	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/9.36 MHz	1,2,4	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59
	dBm/18.36 MHz	3	-61.68	-67.12	-67.12	-67.12	-67.12	-61.68
Propagation Condition		1,2,3,4	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.3.2.1.6 NR SA FR1 RRC Re-establishment for 2 Rx UE without serving cell timing

16.3.2.1.6.1 Test purpose

To verify that the NR intra-frequency RRC re-establishment delay in FR1 without serving cell timing is within the specified limits. This test will verify the requirements in 38.133 [6] clause 6.2.1B.

16.3.2.1.6.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

16.3.2.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.1.6.

16.3.2.1.6.4 Test description

16.3.2.1.6.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.1.3.4.1 with following exceptions:

- Table 6.3.2.1.3.4.1-1 is replaced by Table 16.3.2.1.6.4.1-1.
- Table 6.3.2.1.3.4.1-2 is replaced by Table 16.3.2.1.6.4.1-2.
- Table 6.3.2.1.3.4.1-3 is replaced by Table 16.3.2.1.6.4.1-3

Table 16.3.2.1.6.4.1-1: Supported test configurations

Configuration	Description
16.3.2.1.6-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.1.6-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.1.6-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.1.6-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.3.2.1.6.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

Table 16.3.2.1.6.4.1-3: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3,4	Cell1	
	Neighbour cells		1,2,3,4	Cell2	
Final condition	Active cell		1,2,3,4	Cell2	
RF Channel Number			1,2,3,4	1	
Time offset between cells			1,4	3 ms	Asynchronous cells
			2,3	3 μs	Synchronous cells
N310		-	1,2,3,4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3,4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1,2,3,4	6000	Radio link failure timer;

T311	ms	1,2,3,4	3000	RRC re-establishment timer
Access Barring Information	-	1,2,3,4	Not Sent	No additional delays in random access procedure.
SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1,4	SMTC.2	
		2,3	SMTC.1	
DRX cycle length	s	1,2,3,4	OFF	
PRACH configuration		1,2,3,4	PRACH.1 FR1	Table A.7.1-1
T1	s	1,2,3,4	5	
T2	s	1,2,3,4	6.24	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133 [6], T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133[6])
T3	s	1,2,3,4	3	

16.3.2.1.6.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.1.3.4.2.

16.3.2.1.6.4.3 Message contents

Same as the message contents given in 6.3.2.1.3.4.3 with the following exceptions:

- Table 7.3.1-3 in 38.508-1 [14] is used with condition SMTC.2 for Test Configuration 16.3.2.1.6-4.

16.3.2.1.6.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.1.3.5 with following exceptions:

- Table 6.3.2.1.3.5-1 is replaced by Table 16.3.2.1.6.5-1.

Table 16.3.2.1.6.5-1: Cell specific test parameters

Parameter	Unit	Test config	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1,4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1,4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1,4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1,2,3,4	OP.1			OP.1		
TRS configuration		1,4	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
Initial DL BWP configuration		1,2,3,4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3,4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1,2,3,4	SSB			SSB		
$\hat{E}_s / I_{ot}$	dB	1,2,3,4	4	-infinity	-infinity	-infinity	-infinity	4
N_{oc} Note2	dBm/SCS	1,2,4	-98					

		3	-95					
N_{oc} Note2	dBm/15 kHz	1,2,3,4	-98					
$\hat{E}_s / N_{oc}$	dB	1,2,3,4	4	-infinity	-infinity	-infinity	-infinity	4
SS-RSRP Note3	dBm/SCS	1,2,4	-94	-infinity	-infinity	-infinity	-infinity	-94
		3	-91	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/9.36 MHz	1,2,4	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59
	dBm/18.36 MHz	3	-61.66	-67.12	-67.12	-67.12	-67.12	-61.66
Propagation Condition		1,2,3,4	AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

16.3.2.2 Random access for RedCap

16.3.2.2.0 Minimum conformance requirements

16.3.2.2.0.1 Minimum conformance requirements for Contention based random access

The 4-step and 2-step random access requirements described in clause 6.3.2.2.0.1 are applicable for TDD and FDD RedCap UEs.

The 4-step and 2-step RA requirements for contention based random access defined in clause 6.3.2.2.0.1 apply to HD-FDD UE with the following conditions:

- The RedCap UE operating in HD-FDD mode is not expected to perform PRACH transmission on a PRACH resource of a cell if UE has not received at least one SSB associated with that PRACH resource during the last T_p period in the cell, where T_p=160 ms.

- The RedCap UE operating in HD-FDD mode shall meet the PRACH requirements when performing PRACH transmission on a PRACH resource of a cell provided that the UE has received at least one SSB associated with that PRACH resource during the last T_p period before the PRACH transmission, where T_p=160 ms.

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.2B.

16.3.2.2.0.2 Minimum conformance requirements for Non-Contention based random access

The 4-step and 2-step non-contention based random access requirements described in clause 6.3.2.2.0.1 are applicable for TDD and FDD RedCap UEs.

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.1B.

16.3.2.2.1 NR SA FR1 4-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE

16.3.2.2.1.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in 38.133 [6] clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

16.3.2.2.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

16.3.2.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.2.1.

16.3.2.2.1.4 Test description

16.3.2.2.1.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.2.1.4.1 with following exceptions:

- Table 6.3.2.2.1.4.1-1 is replaced by Table 16.3.2.2.1.4.1-1.
- Table 6.3.2.2.1.4.1-2 is replaced by Table 16.3.2.2.1.4.1-2.

Table 16.3.2.2.1.4.1-1: Supported test configurations

Configuration	Description
16.3.2.2.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.2.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.2.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.2.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.3.2.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

16.3.2.2.1.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.2.1.4.2 with following exceptions:

- Step 4 (Test 1) is replaced by following steps:

4. Test 1: Correct behaviour when transmitting Random Access Preamble

   4.1. The UE shall send a preamble to the System Simulator. The System Simulator shall check that the Random Access Preamble belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured rsrp-ThresholdSSB+1dB.

16.3.2.2.1.4.3 Message contents

Same as the message contents given in 6.3.2.2.1.4.3.

16.3.2.2.1.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.2.1.5 with following exceptions:

- Table 6.3.2.2.1.5-1 is replaced by Table 16.3.2.2.1.5-1.
- The check on the power of the first preamble in Test 2, Test 3, Test 5 and Test 7 is replaced as follows:

- The power of the first preamble shall be X dBm within the accuracy specified in Table 16.3.2.2.1.5-2, where
  - X = -23.55 for test configuration 16.3.2.2.1-1, 16.3.2.2.1-3 and 16.3.2.2.1-4,
  - X = -26.55 for test configuration 16.3.2.2.1-2.

Table 16.3.2.2.1.5-1: General test parameters

Parameter			Unit	Test-1	Comments
SSB Configuration		Config 1,2,4		SSB.1 FR1	As defined in A.3 and A.3A, except for number of SSBs per SS-burst and SS/PBCH block index as below
		Config 3		SSB.1 RedCap FR1	
Number of SSBs per SS-burst				2	Different from the definition in A.3 and A.3A
SS/PBCH block index				0,1	Different from the definition in A.3 and A.3A
Duplex Mode for Cell 1		Config 1		FDD	
		Config 2,3		TDD	
		Config 4		HD-FDD	
TDD Configuration		Config 2		TDDConf.1.1	
		Config 3		TDDConf.2.1	
CSI-RS for tracking		Config 1,4		TRS.1.1 FDD	
		Config 2		TRS.1.1 TDD	
		Config 3		TRS.1.2 TDD	
OCNG Pattern Note 1				OP.1	As defined in A.2.1
PDSCH parameters Note 4		Config 1,4		SR.1.1 FDD	As defined in A.1.1
		Config 2		SR.1.1 TDD	
		Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD	
		Config 2		CR.1.1 TDD	
		Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD	
		Config 2		CCR.1.1 TDD	
		Config 3		CCR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	4.55	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*+1dB
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	4.55	
	SS-RSRP Note 3		dBm/ SCS	-93.45	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*+1dB
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	

Io Note 2	Config 1,2,4	dBm	-64.19/9.36MHz	For symbols without SSB index 1
	Config 3		-64.27/18.36 MHz	
ss-PBCH-BlockPower		dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)		dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
PRACH Configuration			PRACH.1 FR1	As defined in A.7.1
Propagation Condition		-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.				

Table 16.3.2.2.1.5-2 Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 20.1 dB

16.3.2.2.2 NR SA FR1 4-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE

16.3.2.2.2.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will also verify the requirements in 38.133 [6] Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model

16.3.2.2.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

16.3.2.2.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.3.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clauses A.16.3.2.2.2.

16.3.2.2.2.4 Test description

16.3.2.2.2.4.1 Initial conditions

Same as the initial conditions given in 6.3.2.2.1.4.1 with following exceptions:

- Table 6.3.2.2.1.4.1-1 is replaced by Table 16.3.2.2.2.4.1-1.
- Table 6.3.2.2.1.4.1-2 is replaced by Table 16.3.2.2.2.4.1-2.

Table 16.3.2.2.2.4.1-1: Supported test configurations

Config	Description
16.3.2.2.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.2.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.2.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.2.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table 16.3.2.2.2.4.1-2: Initial conditions for Contention based random access test in FR1 for NR standalone

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

16.3.2.2.2.4.2 Test procedure

Same as the test procedure given in clause 6.3.2.2.1.4.2.

16.3.2.2.2.4.3 Message contents

Same as the message contents given in clause 6.3.2.2.1.4.3.

16.3.2.2.2.5 Test requirement

Same as the test requirements given in clause 6.3.2.2.1.4.2 with following exceptions:

- Table 6.3.2.2.1.5-1 is replaced by Table 16.3.2.2.2.5-1.
- The check on the power of the first preamble in Test 2, Test 3, Test 5 and Test 7 is replaced as follows:
  - The power of the first preamble shall be X dBm within the accuracy specified in Table 6.3.2.2.1.5-2, where
    - X = -22 for test configuration 16.3.2.2.2-1, 16.3.2.2.2-3 and 16.3.2.2.2-4,
    - X = -25 for test configuration 16.3.2.2.2-2.

Table 16.3.2.2.2.5-1: General test parameters

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2,4		SSB.1 FR1	As defined in A.3 and A.3A, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 3		SSB.1 RedCap FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10 and A.3.10B
SS/PBCH block index			0,1	Different from the definition in A.3.10 and A.3.10B
Duplex Mode for Cell 1	Config 1,4		FDD	
	Config 2,3		TDD	
TDD Configuration	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Pattern Note 1			OP.1	As defined in A.2.1.
PDSCH parameters Note 4	Config 1,4		SR.1.1 FDD	As defined in A.1.1.
	Config 2		SR.1.1 TDD	

		Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD	
		Config 2		CR.1.1 TDD	
		Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD	
		Config 2		CCR.1.1 TDD	
		Config 3		CCR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP Note 3	Config 1,2,4	dBm/15kHz	-95	
		Config 3		-98	
	SS-RSRP Note 3		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3	Config 1,2,4	dBm/15kHz	-115	
		Config 3		-118	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1,2,4	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3		-65.38/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
PRACH Configuration				PRACH.1 FR1	As defined in A.7.1.
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

16.3.2.2.3 NR SA FR1 4-step RA type non-contention based random access test in FR1 for NR standalone for 1 Rx UE

16.3.2.2.3.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in 38.133 [6] clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

16.3.2.2.3.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards. In addition, Test 2 is applicable to UEs that support CSI-RS based Random Access Preamble which requires UE to support *csi-RS-CFRA-ForHO*.

16.3.2.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.2.3.

16.3.2.2.3.4 Test description

16.3.2.2.3.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.2.2.4.1 with following exceptions:

- Table 6.3.2.2.2.4.1-1 is replaced by Table 16.3.2.2.3.4.1-1.
- Table 6.3.2.2.2.4.1-2 is replaced by Table 16.3.2.2.3.4.1-2.

Table 16.3.2.2.3.4.1-1: Supported test configurations

Configuration	Description
16.3.2.2.3-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.2.3-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.2.3-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.2.3-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.3.2.2.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

16.3.2.2.3.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.2.2.4.2

16.3.2.2.3.4.3 Message contents

Same as the message contents given in 6.3.2.2.2.4.3.

16.3.2.2.3.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.2.2.5 with following exceptions:

- Table 6.3.2.2.2.5-1 is replaced by Table 16.3.2.2.3.5-1.
- The check on the power of the first preamble in Test 3 and Test 4 is replaced as follows:
  - The power of the first preamble shall be X dBm within the accuracy specified in Table 16.3.2.2.3.5-2, where
    - X = -23.55 for test configuration 16.3.2.2.3-1, 16.3.2.2.3-3 and 16.3.2.2.3-4,
    - X = -26.55 for test configuration 16.3.2.2.3-2.

Table 16.3.2.2.3.5-1: General test parameters

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1,2,4		SSB.1 FR1	SSB.1 FR1	As defined in A.3, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 3		SSB.1 RedCap FR1	SSB.1 RedCap FR1	
Number of SSBs per SS-burst			2	2	Different from the definition in A.3.10B
SS/PBCH block index			0,1	0,1	Different from the definition in A.3.10B
CSI-RS Configuration	Config 1,2,4		N/A	CSI-RS.1.1 FDD	As defined in A.1.4
	Config 3			CSI-RS.2.1 TDD	
Duplex Mode for Cell 1	Config 1		FDD	FDD	
	Config 2,3		TDD	TDD	
	Config 4		HD-FDD	HD-FDD	
TDD Configuration	Config 2		TDDConf.1.1	TDDConf.1.1	
	Config 3		TDDConf.2.1	TDDConf.2.1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern Note 1			OP.1	OP.1	As defined in A.2.1.
PDSCH parameters Note 4	Config 1,4		SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1.1
	Config 2		SR.1.1 TDD	SR.1.1 TDD	
	Config 3		SR.2.1 TDD	SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 TDD	CR.1.1 TDD	
	Config 2		CR.1.1 TDD	CR.1.1 TDD	
	Config 3		CR.2.1 TDD	CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					

SSB with index 0	$\hat{E}_s/I_{ot}$		dB	4.55	4.55	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*+1dB
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	-98	
		Config 3		-101	-101	
	$\hat{E}_s/N_{oc}$		dB	4.55	4.55	
	SS-RSRP Note 3		dBm/ SCS	-93.45	-93.45	
SSB with index 1	$\hat{E}_s/I_{ot}$		dB	-17	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*+1dB
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	-98	
		Config 3		-101	-101	
	$\hat{E}_s/N_{oc}$		dB	-17	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	-115	
Io Note 2		Config 1,2,4	dBm	-64.19/9.36MHz	-64.19/9.36MHz	For symbols without SSB index 1
		Config 3		-64.27/18.36 MHz	-64.27/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{\mathrm{CMAX},\ f,c}$)			dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
PRACH Configuration				PRACH.2 FR1	PRACH.3 FR1	As defined in A.3.8B.2.
Propagation Condition			-	AWGN	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Table 16.3.2.2.3.5-2 Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 20.1 dB

16.3.2.2.4 NR SA FR1 4-step RA type non-contention based random access test in FR1 for NR standalone for 2 Rx UE

16.3.2.2.4.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will also verify the requirements in 38.133 [6] Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model

16.3.2.2.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards. In addition, Test 2 is applicable to UEs that support CSI-RS based Random Access Preamble which requires UE to support *csi-RS-CFRA-ForHO*.

16.3.2.2.4.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.3.2.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clauses A.16.3.2.2.4.

16.3.2.2.4.4 Test description

16.3.2.2.4.4.1 Initial conditions

Same as the initial conditions given in 6.3.2.2.2.4.1 with following exceptions:

- Table 6.3.2.2.2.4.1-1 is replaced by Table 16.3.2.2.4.4.1-1.
- Table 6.3.2.2.2.4.1-2 is replaced by Table 16.3.2.2.4.4.1-2.

Table 16.3.2.2.4.4.1-1: Supported test configurations

Config	Description
16.3.2.2.4-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.2.4-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.2.4-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.2.4-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table 16.3.2.2.4.4.1-2: Initial conditions for non-contention based random access test in FR1 for NR standalone

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

16.3.2.2.4.4.2 Test procedure

Same as the test procedure given in clause 6.3.2.2.2.4.2.

16.3.2.2.4.4.3 Message contents

Same as the message contents given in clause 6.3.2.2.2.4.3.

16.3.2.2.4.5 Test requirement

Same as the test requirements given in clause 6.3.2.2.2.4.2 with following exceptions:

- Table 6.3.2.2.2.5-1 is replaced by Table 16.3.2.2.4.5-1.
- The check on the power of the first preamble in Test 3 and Test 4 is replaced as follows:
  - The power of the first preamble shall be X dBm within the accuracy specified in Table 6.3.2.2.2.5-2, where
    - X = -22 for test configuration 16.3.2.2.4-1, 16.3.2.2.4-3 and 16.3.2.2.4-4,
    - X = -25 for test configuration 16.3.2.2.4-2.

Table 16.3.2.2.4.5-1: General test parameters

Parameter			Unit	Test-1	Test-2	Comments
SSB Configuration		Config 1,2,4		SSB.1 FR1	SSB.1 FR1	As defined in A.3, except for number of SSBs per SS-burst and SS/PBCH block index as below
		Config 3		SSB.1 RedCap FR1	SSB.1 RedCap FR1	
Number of SSBs per SS-burst				2	2	Different from the definition in A.3.10B
SS/PBCH block index				0,1	0,1	Different from the definition in A.3.10B
CSI-RS Configuration		Config 1,2,4		N/A	CSI-RS.1.1 FDD	As defined in A.1.4
		Config 3			CSI-RS.2.1 TDD	
Duplex Mode for Cell 1		Config 1		FDD	FDD	
		Config 2,3		TDD	TDD	
		Config 4		HD-FDD	HD-FDD	
TDD Configuration		Config 2		TDDConf.1.1	TDDConf.1.1	
		Config 3		TDDConf.2.1	TDDConf.2.1	
CSI-RS for tracking		Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD	
		Config 2		TRS.1.1 TDD	TRS.1.1 TDD	
		Config 3		TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern Note 1				OP.1	OP.1	As defined in A.2.1.
PDSCH parameters Note 4		Config 1,4		SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1.1
		Config 2		SR.1.1 TDD	SR.1.1 TDD	
		Config 3		SR.2.1 TDD	SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 TDD	CR.1.1 TDD	
		Config 2		CR.1.1 TDD	CR.1.1 TDD	
		Config 3		CR.2.1 TDD	CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 TDD	CCR.1.1 TDD	
		Config 2		CCR.1.1 TDD	CCR.1.1 TDD	
		Config 3		CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number				1	1	
EPRE ratio of PSS to SSS			dB	0	0	
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	3	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	-98	
		Config 3		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	3	3	
	SS-RSRP Note 3	Config 1,2,4	dBm/15kHz	-95	-95	
		Config 3		-98	-98	
	SS-RSRP Note 3		dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	-17	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	-98	
		Config 3		-101	-101	

	$\hat{E}_s / N_{oc}$		dB	-17	-17	
	SS-RSRP Note 3	Config 1,2,4	dBm/15kHz	-115	-115	
		Config 3		-118	-118	
	SS-RSRP Note 3		dBm/ SCS	-115	-115	
Io Note 2		Config 1,2,4	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3		-65.38/18.36 MHz	-65.38/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,c}$)			dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
PRACH Configuration				PRACH.2 FR1	PRACH.3 FR1	As defined in A.3.8B.2.
Propagation Condition			-	AWGN	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

16.3.2.2.5 NR SA FR1 2-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE

16.3.2.2.5.1 Test purpose

To verify that the behaviour of the 2-step RA type random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in 38.133 [6] clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

16.3.2.2.5.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx and supporting 2-step RACH from Release 17 onwards.

16.3.2.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.2.5.

16.3.2.2.5.4 Test description

16.3.2.2.5.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.2.3.4.1 with following exceptions:

- Table 6.3.2.2.3.4.1-1 is replaced by Table 16.3.2.2.5.4.1-1.
- Table 6.3.2.2.3.4.1-2 is replaced by Table 16.3.2.2.5.4.1-2.

Table 16.3.2.2.5.4.1-1: Supported test configurations

Configuration	Description
16.3.2.2.5-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.2.5-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.2.5-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.2.5-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.3.2.2.5.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

16.3.2.2.5.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.2.3.4.2.

16.3.2.2.5.4.3 Message contents

Same as the message contents given in 6.3.2.2.3.4.3.

Table 16.3.2.2.5.4.3-1: *BWP-UplinkCommon* (Void)

16.3.2.2.5.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.2.3.5 with following exceptions:

- Table 6.3.2.2.3.5-1 is replaced by Table 16.3.2.2.5.5-1.
- The check on the power of the first preamble in Test 1, Test 2 and Test 3 is replaced as follows:
  - The power of the first preamble shall be X dBm within the accuracy specified in Table 16.3.2.2.5.5-2, where
    - X = -23.55 for test configuration 16.3.2.2.5-1, 16.3.2.2.5-3 and 16.3.2.2.5-4,
    - X = -26.55 for test configuration 16.3.2.2.5-2.
- The check on the power of the first MsgA PUSCH transmission in Test 1, Test 2 and Test 3 is replaced as follows:
  - The power of the first MsgA PUSCH transmission shall be Y dBm within the accuracy specified in Table 16.3.2.2.5.5-2, where
    - Y = -26.55 for test configuration 16.3.2.2.5-1, 16.3.2.2.5-2 and 16.3.2.2.5-4,
    - Y = -23.55 for test configuration 16.3.2.2.5-3.

Table 16.3.2.2.5.5-1: General test parameters

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2,4		SSB.1 FR1	As defined in A.3, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 3		SSB.1 RedCap FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3
SS/PBCH block index			0,1	Different from the definition in A.3
Duplex Mode for Cell 1	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	

TDD Configuration		Config 2		TDDConf.1.1	
		Config 3		TDDConf.2.1	
CSI-RS for tracking		Config 1,4		TRS.1.1 FDD	
		Config 2		TRS.1.1 TDD	
		Config 3		TRS.1.2 TDD	
OCNG Pattern Note 1				OP.1	As defined in A.2.1
PDSCH parameters Note 4		Config 1,4		SR.1.1 FDD	As defined in A.1.1
		Config 2		SR.1.1 TDD	
		Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD	
		Config 2		CR.1.1 TDD	
		Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD	
		Config 2		CCR.1.1 TDD	
		Config 3		CCR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS				0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	4.55	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	4.55	
	SS-RSRP Note 3		dBm/ SCS	-93.45	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1,2,4	dBm	-64.19/9.36MHz	For symbols without SSB index 1
		Config 3		-64.27/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{\mathrm{CMAX},\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
MsgA Configuration				MsgA.1 FR1	As defined in A.7A.1
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3:	The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Table 16.3.2.2.5.5-2 Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 20.1 dB

16.3.2.2.6 NR SA FR1 2-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE

16.3.2.2.6.1 Test purpose

To verify that the behaviour of the 2-step RA type random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will also verify the requirements in 38.133 [6] Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model

16.3.2.2.6.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx and supporting 2-step RACH from Release 17 onwards.

16.3.2.2.6.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.3.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clauses A.16.3.2.2.6.

16.3.2.2.6.4 Test description

16.3.2.2.6.4.1 Initial conditions

Same as the initial conditions given in 6.3.2.2.3.4.1 with following exceptions:

- Table 6.3.2.2.3.4.1-1 is replaced by Table 16.3.2.2.6.4.1-1.
- Table 6.3.2.2.3.4.1-2 is replaced by Table 16.3.2.2.6.4.1-2.

Table 16.3.2.2.6.4.1-1: Supported test configurations

Config	Description
16.3.2.2.6-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.2.6-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.2.6-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.2.6-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table 16.3.2.2.6.4.1-2: Initial conditions for Contention based random access test in FR1 for NR standalone

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

16.3.2.2.6.4.2 Test procedure

Same as the test procedure given in clause 6.3.2.2.3.4.2.

16.3.2.2.6.4.3 Message contents

Same as the message contents given in clause 6.3.2.2.3.4.3.

Table 16.3.2.2.6.4.3-1: *BWP-UplinkCommon* (Void)

16.3.2.2.6.5 Test requirement

Same as the test requirements given in clause 6.3.2.2.3.4.2 with following exceptions:

- Table 6.3.2.2.3.5-1 is replaced by Table 16.3.2.2.6.5-1.
- The check on the power of the first preamble in Test 1, Test 2 and Test 3 is replaced as follows:
  - The power of the first preamble shall be X dBm within the accuracy specified in Table 6.3.2.2.3.5-2, where
    - X = -22 for test configuration 16.3.2.2.6-1, 16.3.2.2.6-3 and 16.3.2.2.6-4,
    - X = -25 for test configuration 16.3.2.2.6-2.
- The check on the power of the first MsgA PUSCH transmission in Test 1, Test 2 and Test 3 is replaced as follows:
  - The power of the first MsgA PUSCH transmission shall be Y dBm within the accuracy specified in Table 6.3.2.2.4.5-2A, where
    - Y = -25 for test configuration 16.3.2.2.6-1, 16.3.2.2.6-2 and 16.3.2.2.6-4,
    - Y = -22 for test configuration 16.3.2.2.6-3.

Table 16.3.2.2.6.5-1: General test parameters

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2,4		SSB.1 FR1	As defined in A.3, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 3		SSB.1 RedCap FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3
SS/PBCH block index			0,1	Different from the definition in A.3
Duplex Mode for Cell 1	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Pattern Note 1			OP.1	As defined in A.2.1
PDSCH parameters Note 4	Config 1,4		SR.1.1 FDD	As defined in A.1.1
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	

Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD	
		Config 2		CCR.1.1 TDD	
		Config 3		CCR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP Note 3	Config 1,2,4	dBm/15kHz	-95	
		Config 3		-98	
	SS-RSRP Note 3		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3	Config 1,2,4	dBm/15kHz	-115	
		Config 3		-118	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1,2,4	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3		-65.38/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{\mathrm{CMAX},\ f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
MsgA Configuration				MsgA.1 FR1	As defined in A.7A.1
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

16.3.2.2.7 NR SA FR1 2-step RA type non-contention based test in FR1 for NR standalone for 1 RX UE

16.3.2.2.7.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in 38.133 [6] clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

16.3.2.2.7.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx and 2-step RACH from Release 17 onwards.

16.3.2.2.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 6.3.2.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.2.7.

16.3.2.2.7.4 Test description

16.3.2.2.7.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.2.4.4.1 with following exceptions:

- Table 6.3.2.2.4.4.1-1 is replaced by Table 16.3.2.2.7.4.1-1.
- Table 6.3.2.2.4.4.1-2 is replaced by Table 16.3.2.2.7.4.1-2.

Table 16.3.2.2.7.4.1-1: Supported test configurations

Configuration	Description
16.3.2.2.7-1	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.2.7-2	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.3.2.2.7.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.2.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

16.3.2.2.7.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.2.4.4.2.

16.3.2.2.7.4.3 Message contents

Same as the message contents given in 6.3.2.2.4.4.3.

Table 16.3.2.2.7.4.3-1: *BWP-UplinkCommon* (Void)

16.3.2.2.7.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.2.4.5 with following exceptions:

- Table 6.3.2.2.4.5-1 is replaced by Table 16.3.2.2.7.5-1.
- The check on the power of the first preamble in Test 1, Test 2 and Test 3 is replaced as follows:
  - The power of the first preamble shall be -23.55 dBm within the accuracy specified in Table 16.3.2.2.7.5-2.
- The check on the power of the first MsgA PUSCH transmission in Test 1, Test 2 and Test 3 is replaced as follows:
  - The power of the first MsgA PUSCH transmission shall be -23.55 dBm for test configuration 16.3.2.2.7-1 and -26.55 dBm for test configuration 16.3.2.2.7-2 within the accuracy specified in Table 16.3.2.2.7.5-2.

Table 16.3.2.2.7.5-1: General test parameters

Parameter			Unit	Test-1	Comments
SSB Configuration		Config 1		SSB.1 RedCap FR1	As defined in A.3, except for number of SSBs per SS-burst and SS/PBCH block index as below
		Config 2		SSB.1 FR1	
Number of SSBs per SS-burst				2	Different from the definition in A.3
SS/PBCH block index				0,1	Different from the definition in A.3
Duplex Mode for Cell 1		Config 1		TDD	
		Config 2		HD-FDD	
TDD Configuration		Config 1		TDDConf.2.1	
CSI-RS for tracking		Config 1		TRS. 1.2 TDD	
		Config 2		TRS. 1.1 FDD	
OCNG Pattern Note 1				OP.1	As defined in A.2.1
PDSCH parameters Note 4		Config 1		SR.2.1 TDD	As defined in A.1.1
		Config 2		SR.1.1 FDD	
RMSI CORESET Reference Channel		Config 1		CR.2.1 TDD	
		Config 2		CR.1.1 FDD	
Dedicated CORESET Reference Channel		Config 1		CCR.2.1 TDD	
		Config 2		CCR.1.1 FDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	4.55	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	4.55	
	SS-RSRP Note 3		dBm/ SCS	--93.45	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	

		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	--94.19/9.36MHz	For symbols without SSB index 1
		Config 2		--64.27/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
MsgA Configuration				MsgA.2 FR1	As defined in A.7A.1
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Table 16.3.2.2.7.5-2 Absolute power tolerance Test requirements

Conditions	Tolerance
Normal	± 20.1 dB

16.3.2.2.8 NR SA FR1 2-step RA type non-contention based test in FR1 for NR standalone for 2 RX UE

16.3.2.2.8.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in 38.133 [6] Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

16.3.2.2.8.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx and 2-step RACH from Release 17 onwards.

16.3.2.2.8.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.3.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clauses A.16.3.2.2.8.

16.3.2.2.8.4 Test description

16.3.2.2.8.4.1 Initial conditions

Same as the initial conditions given in 6.3.2.2.4.4.1 with following exceptions:

- Table 6.3.2.2.4.4.1-1 is replaced by Table 16.3.2.2.8.4.1-1.
- Table 6.3.2.2.4.4.1-2 is replaced by Table 16.3.2.2.8.4.1-2.

Table 16.3.2.2.8.4.1-1: Supported test configurations

Config	Description
16.3.2.2.8-1	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.2.8-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table 16.3.2.2.8.4.1-2: Initial conditions for Contention based random access test in FR1 for NR standalone

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.2.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

16.3.2.2.8.4.2 Test procedure

Same as the test procedure given in clause 6.3.2.2.4.4.2.

16.3.2.2.8.4.3 Message contents

Same as the message contents given in clause 6.3.2.2.4.4.3.

Table 16.3.2.2.8.4.3-1: *BWP-UplinkCommon* (Void)

16.3.2.2.8.5 Test requirement

Same as the test requirements given in clause 6.3.2.2.4.4.2 with following exceptions:

- Table 6.3.2.2.4.5-1 is replaced by Table 16.3.2.2.8.5-1.
- The check on the power of the first MsgA PUSCH in Test 1, Test 2 and Test 3 is replaced as follows:
  - The power of the first MsgA PUSCH transmission shall be -22 dBm for test configuration 16.3.2.2.8-1 and -25 dBm for test configuration 16.3.2.2.8-2 within the accuracy specified in Table 6.3.2.2.4.5-2A.

Table 16.3.2.2.8.5-1: General test parameters

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 RedCap FR1	As defined in A.3, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB.1 FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3
SS/PBCH block index			0,1	Different from the definition in A.3
Duplex Mode for Cell 1	Config 1		TDD	
	Config 2		HD-FDD	
TDD Configuration	Config 1		TDDConf.2.1	
CSI-RS for tracking	Config 1		TRS.1.2 TDD	
	Config 2		TRS.1.1 FDD	
OCNG Pattern Note 1			OP.1	As defined in A.2.1
PDSCH parameters Note 4	Config 1		SR.2.1 TDD	As defined in A.1.1
	Config 2		SR.1.1 FDD	

RMSI CORESET Reference Channel		Config 1		CR.2.1 TDD	
		Config 2		CR.1.1 FDD	
Dedicated CORESET Reference Channel		Config 1		CCR.2.1 TDD	
		Config 2		CCR.1.1 FDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP Note 3	Config 1,2,4	dBm/15kHz	-95	
		Config 3		-98	
	SS-RSRP Note 3		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	N_{oc}	Config 1	dBm/15kHz	-101	
		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP Note 3	Config 1,2,4	dBm/15kHz	-115	
		Config 3		-118	
	SS-RSRP Note 3		dBm/ SCS	-115	
Io Note 2		Config 1	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-65.38/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [13].
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1 [2].
MsgA Configuration				MsgA.2 FR1	As defined in A.7A.1
msgA-RSRP-ThresholdSSB				RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
Propagation Condition			-	AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

16.3.2.3 RRC connection release with redirection for RedCap

16.3.2.3.0 Minimum conformance requirements

16.3.2.3.0.1 Minimum conformance requirements for FR1 RRC connection release with redirection

The requirements in clause 6.3.2.3.0.1 shall apply when RedCap UE is capable of 2 Rx.

When UE is only required to support 1 Rx antenna, the requirements defined in clause 6.3.2.3.0.1 shall apply except that:

- $T_{identify-NR}$ as specified in Table 16.3.2.3.0.1-1.

Table 16.3.2.3.0.1-1: Time to identify target NR cell for RRC connection release with redirection to NR

FR of target NR cell	$T_{identify-NR}$
FR1	MAX (680 ms, [12] x T_{rs})
Note: If the UE has been provided with higher layer signalling of *smtc2* specified in TS 38.331 [2] prior to the redirection command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.	

The HD-FDD UE shall meet the RRC connection release with redirection requirements provided that SSB is available at the UE once every SMTC period during T_{search}.

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.3A.2.1.

16.3.2.3.0.2 Minimum conformance requirements for FR1 – E-UTRAN RRC connection release with redirection

The requirements in clause 6.3.2.3.0.2 shall apply.

The normative reference for this requirement is TS 38.133 [6] clauses 6.2.3A.2.2.

16.3.2.3.1 NR SA FR1-FR1 RRC connection release with redirection for 1 Rx UE

16.3.2.3.1.1 Test purpose

To verify RRC connection release with redirection from NR to NR requirements specified in 38.133 [6] clause 6.2.3A.2.1.

16.3.2.3.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

16.3.2.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.2.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.3.1.

16.3.2.3.1.4 Test description

16.3.2.3.1.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.3.1.4.1 with following exceptions:

- Table 6.3.2.3.1.4.1-1 is replaced by Table 16.3.2.3.1.4.1-1.
- Table 6.3.2.3.1.4.1-2 is replaced by Table 16.3.2.3.1.4.1-2.
- Table 6.3.2.3.1.4.1-3 is replaced by Table 16.3.2.3.1.4.1-3.

Table 16.3.2.3.1.4.1-1: Supported test configurations

Configuration	Description
16.3.2.3.1-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

16.3.2.3.1-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.3.1-3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.3.1-4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.3.2.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.3.2.3.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	2.3	

16.3.2.3.1.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.3.1.4.2.

16.3.2.3.1.4.3 Message contents

Same as the message contents given in 6.3.2.3.1.4.3 with following exceptions.

- Table 6.3.2.3.1.4.3-1 is replaced by Table 16.3.2.3.1.4.3-1.

Table 16.3.2.3.1.4.3-1: RRCRelease (Test procedure, Step 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCRelease ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcRelease SEQUENCE {			
redirectedCarrierInfo CHOICE {			
nr SEQUENCE {			
carrierFreq	ARFCN-ValueNR of Cell 2		
ssbSubcarrierSpacing	kHz15		Config 1,2,4
	kHz30		Config 3
smtc SEQUENCE {			
duration	sf1		SMTC.1
	sf5		SMTC.2
}			
}			

}			
}			
}			
}			

16.3.2.3.1.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.3.1.5 with following exceptions:

- Table 6.3.2.3.1.5-1 is replaced by Table 16.3.2.3.1.5-1.

Table 16.3.2.3.1.5-1: Cell specific test parameters

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2, 3		TDD			
	Config 4		HD-FDD			
SSB Configuration	Config 1,2,4		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
BWP BW	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
	Config 4		SR.1.1 FDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
	Config 4		CR.1.1 FDD			
OCNG Patterns			OP.1			
SMTC configuration	Config 1,2,4		SMTC.1 FR1			
	Config 3		SMTC.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			PRACH.1 FR1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98			

	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4
Io[Note3]	Config 1,2,4	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-64.59
	Config 3	dBm/ 18.36MHz	-61.66	-61.66	-67.12	-61.66
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.3.2.3.2 NR SA FR1-FR1 RRC connection release with redirection for 2 Rx UE

16.3.2.3.2.1 Test purpose

To verify RRC connection release with redirection from NR to NR requirements specified in 38.133 [6] clause 6.2.3A.2.1.

16.3.2.3.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

16.3.2.3.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.3.2.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clauses A.16.3.2.3.2.

16.3.2.3.2.4 Test description

16.3.2.3.2.4.1 Initial conditions

Same as the initial conditions given in 6.3.2.3.1.4.1 with following exceptions:

- Table 6.3.2.3.1.4.1-1 is replaced by Table 16.3.2.3.2.4.1-1.
- Table 6.3.2.3.1.4.1-2 is replaced by Table 16.3.2.3.2.4.1-2.
- Table 6.3.2.3.1.4.1-3 is replaced by Table 16.3.2.3.1.4.1-3.

Table 16.3.2.3.2.4.1-1: Supported test configurations

Configuration	Description
16.3.2.3.2-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.3.2.3.2-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.3.2.3.2-3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.3.2.3.2-4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.3.2.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 16.3.2.3.2.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 µs	Synchronous cells
T1		s	5	
T2		s	2.3	

16.3.2.3.2.4.2 Test procedure

Same as the test procedure given in clause 6.3.2.3.1.4.2.

16.3.2.3.2.4.3 Message contents

Same as the message contents given in 6.3.2.3.1.4.3 with following exceptions.

- Table 6.3.2.3.1.4.2-1 is replaced by Table 16.3.2.3.2.4.3-1.

Table 16.3.2.3.2.4.3-1: RRCRelease (Test procedure, Step 3)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-16			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCRelease ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcRelease SEQUENCE {			
redirectedCarrierInfo CHOICE {			
nr SEQUENCE {			
carrierFreq	ARFCN-ValueNR of Cell 2		
ssbSubcarrierSpacing	kHz15		Config 1,2,4
	kHz30		Config 3
smtc SEQUENCE {			
duration	sf1		SMTC.1
	sf5		SMTC.2
}			
}			
}			
}			
}			
}			

16.3.2.3.2.5 Test requirement

Same as the test requirements given in clause 6.3.2.3.1.5 with following exceptions:

- Table 6.3.2.3.1.5-1 is replaced by Table 16.3.2.3.2.5-1.

Table 16.3.2.3.2.5-1: Cell specific test parameter

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2, 3		TDD			
	Config 4		HD-FDD			
SSB Configuration	Config 1,2,4		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
BWP BW	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52			
	Config 3		20: $N_{RB,c}$ = 51			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1,4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
OCNG Patterns			OP.1			
SMTC configuration	Config 1,2,4		SMTC.1 FR1			
	Config 3		SMTC.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			PRACH.1 FR1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-64.59
	Config 3	dBm/ 18.36MHz	-61.66	-61.66	-67.12	-61.66
Propagation condition		-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.3.2.3.3 NR SA FR1 - E-UTRA RRC connection release with redirection for 1 Rx UE

16.3.2.3.3.1 Test purpose

To verify RRC connection release with redirection from NR to E-UTRAN requirements specified in 38.133 [4] clause 6.2.3A.2.2.

16.3.2.3.3.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

16.3.2.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.2.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.3.3.

16.3.2.3.3.4 Test description

16.3.2.3.3.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.3.2.4.1 with following exceptions:

- Table 6.3.2.3.2.4.1-1 is replaced by Table 16.3.2.3.3.4.1-1.
- Table 6.3.2.3.2.4.1-2 is replaced by Table 16.3.2.3.3.4.1-2.
- Table 6.3.2.3.2.4.1-3 is replaced by Table 16.3.2.3.3.4.1-3.

Table 16.3.2.3.3.4.1-1: Supported test configurations

Configuration	Description
16.3.2.3.3-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.3.2.3.3-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.2.3.3-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.2.3.3-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.3.2.3.3-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.2.3.3-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.2.3.3-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
16.3.2.3.3-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.3.2.3.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.3.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.3.2.3.3.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	2.3	

16.3.2.3.3.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.3.2.4.2.

16.3.2.3.3.4.3 Message contents

Same as the message contents given in 6.3.2.3.2.4.3.

16.3.2.3.3.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.3.2.5 with following exceptions:

- Table 6.3.2.3.2.5-1 is replaced by Table 16.3.2.3.3.5-1.
- Table 6.3.2.3.2.5-2 is replaced by Table 16.3.2.3.3.5-2.

Table 16.3.2.3.3.5-1: Cell specific test parameters for NR Cell (Cell 1)

Parameter		Unit	Cell 1	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
	Config 7,8		HD-FDD	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6		SSB.1 RedCap FR1	
CSI-RS for tracking	Config 1,4,7,8		TRS.1.1 FDD	
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
TDD configuration	Config 1,4,7,8		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
BWP BW	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4,7,8		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD	
CORESET Reference Channel	Config 1,4,7,8		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD	
OCNG Patterns			OP.1	
SMTC configuration	Config 1,2,4,5,7,8		SMTC.1 FR1	
	Config 3,6		SMTC.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PRACH configuration			PRACH.1 FR1	

BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	
	Config 3,6		-95	
$\hat{E}_s/I_{ot}$		dB	4	4
$\hat{E}_s/N_{oc}$		dB	4	4
Io Note3	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6	dBm/ 18.36MHz	-61.66	-61.66
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.3.2.3.3.5-2: Cell specific test parameters for E-UTRAN Cell (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1,2,3,4,5,6,7,8	2	
Duplex mode		1,2,3,7	FDD	
		4,5,6,8	TDD	
TDD special subframe configuration Note1		4,5,6,8	6	
TDD uplink-downlink configuration Note1		4,5,6,8	1	
$BW_{channel}$	MHz	1,2,3,4,5,6,7,8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration Note2		1,2,3,7	4	
		4,5,6,8	53	
PDSCH parameters: DL Reference Measurement Channel Note3		1,2,3,7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4,5,6,8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel Note3		1,2,3,7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4,5,6,8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns Note3		1,2,3,7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4,5,6,8	5 MHz: OP.9 TDD	

			10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1,2,3,4,5,6,7,8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note4				
OCNG_RB Note4				
N_{oc} Note5	dBm/15kHz	1,2,3,4,5,6,7,8	-98	
$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6,7,8	-Infinity	4
$\hat{E}_s/I_{ot}$ Note6	dB	1,2,3,4,5,6,7,8	-Infinity	4
RSRP Note6	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-94
SCH_RP Note6	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-94
Io Note6	dBm/9MHz	1,2,3,4,5,6,7,8	-70.22	-64.76
Propagation Condition		1,2,3,4,5,6,7,8	AWGN	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [24].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

16.3.2.3.4 NR SA FR1 - E-UTRA RRC connection release with redirection for 2 Rx UE

16.3.2.3.4.1 Test purpose

To verify RRC connection release with redirection from NR to E-UTRAN requirements specified in 38.133 [4] clause 6.2.3A.2.2.

16.3.2.3.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

16.3.2.3.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.3.2.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.3.2.3.4.

16.3.2.3.4.4 Test description

16.3.2.3.4.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.3.2.3.2.4.1 with following exceptions:

- Table 6.3.2.3.2.4.1-1 is replaced by Table 16.3.2.3.4.4.1-1.
- Table 6.3.2.3.2.4.1-2 is replaced by Table 16.3.2.3.4.4.1-2.
- Table 6.3.2.3.2.4.1-3 is replaced by Table 16.3.2.3.4.4.1-3.

Table 16.3.2.3.4.4.1-1: Supported test configurations

Configuration	Description
16.3.2.3.4-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.3.2.3.4-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.2.3.4-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.3.2.3.4-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.3.2.3.4-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.2.3.4-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
16.3.2.3.4-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
16.3.2.3.4-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.3.2.3.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.3.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram			

Table 16.3.2.3.4.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	2.3	

16.3.2.3.4.4.2 Test procedure

Same as the test procedure given in sub-clause 6.3.2.3.2.4.2.

16.3.2.3.4.4.3 Message contents

Same as the message contents given in 6.3.2.3.2.4.3.

16.3.2.3.4.5 Test requirement

Same as the test requirements given in sub-clause 6.3.2.3.2.5 with following exceptions:

- Table 6.3.2.3.2.5-1 is replaced by Table 16.3.2.3.4.5-1.
- Table 6.3.2.3.2.5-2 is replaced by Table 16.3.2.3.4.5-2.

Table 16.3.2.3.4.5-1: Cell specific test parameters for NR Cell (Cell 1)

Parameter		Unit	Cell 1	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	

	Config 2,3,5,6		TDD	
	Config 7,8		HD-FDD	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6		SSB.1 RedCap FR1	
CSI-RS for tracking	Config 1,4,7,8		TRS.1.1 FDD	
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
TDD configuration	Config 1,4,7,8		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
BWP BW	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4,7,8		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD	
CORESET Reference Channel	Config 1,4,7,8		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD	
OCNG Patterns			OP.1	
SMTC configuration	Config 1,2,4,5,7,8		SMTC.1 FR1	
	Config 3,6		SMTC.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PRACH configuration			PRACH.1 FR1	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	
	Config 3,6		-95	
$\hat{E}_s/I_{ot}$		dB	4	4
$\hat{E}_s/N_{oc}$		dB	4	4
Io Note3	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6	dBm/ 18.36MHz	-61.66	-61.66
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.3.2.3.4.5-2: Cell specific test parameters for E-UTRAN Cell (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1,2,3,4,5,6,7,8	2	
Duplex mode		1,2,3,7	FDD	
		4,5,6,8	TDD	
TDD special subframe configuration[Note1]		4,5,6,8	6	
TDD uplink-downlink configuration[Note1]		4,5,6,8	1	
$BW_{channel}$	MHz	1,2,3,4,5,6,7,8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1,2,3,7	4	
		4,5,6,8	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4,5,6,8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4,5,6,8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1,2,3,7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4,5,6,8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1,2,3,4,5,6,7,8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1,2,3,4,5,6,7,8	-98	
$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6,7,8	-Infinity	4
$\hat{E}_s/I_{ot}$[Note6]	dB	1,2,3,4,5,6,7,8	-Infinity	4
RSRP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-94
SCH_RP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-94
Io[Note6]	dBm/9MHz	1,2,3,4,5,6,7,8	-70.22	-64.76
Propagation Condition		1,2,3,4,5,6,7,8	AWGN	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [24].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

16.4 Timing for RedCap

16.4.1 UE transmit timing for RedCap

16.4.1.0 Minimum conformance requirements

16.4.1.0.1 Minimum conformance requirements for UE transmit timing accuracy

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 16.4.1.0.1-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS, or it is the PRACH transmission, or it is the msgA transmission.

The UE shall meet the T_e requirement for an initial transmission provided that at least one SSB (CD-SSB or NCD-SSB) is available at the UE during the last 160 ms on the condition that:

the SSB is within the UE's active BWP, or

the SSB is not within the UE's active BWP, and the measurement gap is configured

The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_{\mathrm{c}}$. The downlink timing is defined as the time when the first ~~detected~~ path (in time) of the corresponding downlink frame used by the UE to determine downlink timing is received from the reference cell at UE antenna. N_{TA} for PRACH is defined as 0.

$(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_{\mathrm{c}}$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in 38.133 [6] clause 7.3A was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{\mathrm{TA\ offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{\mathrm{TA\ offset}}$ is defined in Table 16.4.1.0.1-2.

Table 16.4.1.0.1-1: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_e
1	15	15	12*64*T_c
		30	10*64*T_c
		60	10*64*T_c
	30	15	8*64*T_c
		30	8*64*T_c
		60	7*64*T_c
Note 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 16.4.1.0.1-2: The Value of $N_{\mathrm{TA\ offset}}$

Frequency range and band of cell used for uplink transmission	$N_{\mathrm{TA\ offset}}$ (Unit: T_C)
FR1 FDD or TDD band with neither E-UTRA–NR nor NB-IoT–NR coexistence case	25600 (Note 1)
FR1 FDD band with E-UTRA–NR and/or NB-IoT–NR coexistence case	0 (Note 1)
FR1 TDD band with E-UTRA–NR and/or NB-IoT–NR coexistence case	39936 (Note 1)
FR2	13792

Note 1:	The UE identifies $N_{\text{TA offset}}$ based on the information n-TimingAdvanceOffset as specified in TS 38.331 [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{\text{TA offset}}$ is set as 25600 for FR1 band.
Note 2:	Void

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell except when the timing advance in 38.133 [6] clause 7.3A is applied.

When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$ then the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{\text{TA}} + N_{\text{TA offset}}) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q.

2) The minimum aggregate adjustment rate shall be T_p per second.

3) The maximum aggregate adjustment rate shall be T_q per 200 ms.

   where the maximum autonomous time adjustment step T_q and the aggregate adjustment rate T_p are specified in Table 16.4.1.0.1-3.

Table 16.4.1.0.1-3: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (kHz)	T_q	T_p
1	15	$5.5*64*T_c$	$5.5*64*T_c$
	30	$5.5*64*T_c$	$5.5*64*T_c$
	60	$5.5*64*T_c$	$5.5*64*T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]			

The normative reference for this requirement is TS.38.133 [6] clause 7.1A.

16.4.1.1 NR SA FR1 NR UE Transmit Timing accuracy for 1 Rx UE

16.4.1.1.1 Test purpose

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in 38.133 [6] clause 7.1A.2.

16.4.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

16.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.4.1.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.16.4.1.1

16.4.1.1.4 Test Description

16.4.1.1.4.1 Initial Conditions

Same as the initial conditions given in clause 6.4.1.1.4.1 with following exceptions:

- Table 6.4.1.1.4.1-1 is replaced by Table 16.4.1.1.4.1-1.

- Table 6.4.1.1.4.1-2 is replaced by Table 16.4.1.1.4.1-2

Table 16.4.1.1.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
16.4.1.1-1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
16.4.1.1-2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
16.4.1.1-3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
16.4.1.1-4	NR HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.4.1.1.4.1-2: Initial conditions for NR SA FR1 transmit timing accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

16.4.1.1.4.2 Test procedure

Same as the test procedure given in clause 6.4.1.1.4.2.

16.4.1.1.4.3 Message contents

Same as the message contents given in clause 6.4.1.1.4.3.

16.4.1.1.5 Test Requirements

Same as the test Requirements given in clause 6.4.1.1.5 with following exceptions:

- Table 6.4.1.1.5-1 is replaced by Table 16.4.1.1.5-1.

Table 16.4.1.1.5-1: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1,2,3	Freq1	Freq1
TDD configuration		1,4	Not Applicable	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
$BW_{channel}$	MHz	1,2,4	10: $N_{RB,c}$ = 52	
		3	20: $N_{RB,c}$ = 51	
Initial BWP Configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3,4	DLBWP.1.1 ULBWP.1.1	
DRX Cycle	ms	1,2,3,4	N/A	DRX.8[Note5]
PDSCH Reference measurement channel		1,4	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD	
		2	CCR.1.1 TDD	

		3	CCR.2.1 TDD	
OCNG Patterns		1,2,3,4	OP.1	
SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC Configuration		1,2,4	SMTC.1	
		3	SMTC.2	
TRS configuration		1,4	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
EPRE ratio of PSS to SSS	dB	1,2,3,4	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2	dBm/15 kHz	1,2,3,4	-98	-98
N_{oc} Note2	dBm/SCS	1,2,4	-98	-98
		3	-95	-95
$\hat{E}_s / I_{ot}$		1,2,3,4	3.3	3.3
$\hat{E}_s / N_{oc}$		1,2,3,4	3.3 Note 7	3.3 Note 7
SS-RSRP Note3	dBm/SCS	1,2,4	-94.7	-94.7
		3	-91.7	-91.7
Io Note3	dBm/9.36MHz	1,2,4	-65.08	-65.08
	dBm/18.36MHz	3	-62.16	-62.16
Propagation condition		1,2,3,4	AWGN	
SRS Config		1,2,4	SRSConf.1 Note6	SRSConf.3 Note6
		3	SRSConf.1 Note6	SRSConf.2 Note6

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: DRX related parameters are given in Table A.5-1
Note 6: SRS configs are given in Table 16.4.1.1.5-2
Note 7: With the test tolerance given in Annex F.

Table 16.4.1.1.5-2: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	SRSConf.3	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	0	
	srs-ResourceIdList	0	0	0	
	resourceType	Periodic	Periodic	Periodic	
	Usage	Codebook	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	0	
	nrofSRS-Ports	Port1	Port1	Port1	
	transmissionComb	n2	n2	n2	
	combOffset-n2	0	0	0	

	cyclicShift-n2	0	0	0	
	resourceMapping startPosition	0	0	0	
	resourceMapping nrofSymbols	n1	n1	n1	
	resourceMapping repetitionFactor	n1	n1	n1	
	freqDomainPosition	0	0	0	
	freqDomainShift	0	0	0	
	freqHopping c-SRS	12 for test configuration 1,2, 3	12	12	
	freqHopping b-SRS	0	0	0	
	freqHopping b-hop	0	0	0	
	groupOrSequenceHopping	Neither	Neither	Neither	
	resourceType	Periodic	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl640, 5	sl320, 3	Offset to align with DRx periodicity
	sequenceId	0	0	0	Any 10 bit number

16.4.1.2 NR SA FR1 NR UE Transmit Timing accuracy for 2 Rx UE

16.4.1.2.1 Test purpose

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeb and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in 38.133 [6] clause 7.1A.2.

16.4.1.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

16.4.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.4.1.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.16.4.1.2

16.4.1.2.4 Test Description

16.4.1.2.4.1 Initial Conditions

Same as the initial conditions given in clause 6.4.1.1.4.1 with following exceptions:

- Table 6.4.1.1.4.1-1 is replaced by Table 16.4.1.2.4.1-1.
- Table 6.4.1.1.4.1-2 is replaced by Table 16.4.1.2.4.1-2

Table 16.4.1.2.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
16.4.1.2-1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
16.4.1.2-2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
16.4.1.2-3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
16.4.1.2-4	NR HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.4.1.2.4.1-2: Initial conditions for NR SA FR1 transmit timing accuracy

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.3.2.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	Without LTE link		

16.4.1.2.4.2 Test procedure

Same as the test procedure given in clause 6.4.1.1.4.2.

16.4.1.2.4.3 Message contents

Same as the message contents given in clause 6.4.1.1.4.3.

16.4.1.2.5 Test Requirements

Same as the test Requirements given in clause 6.4.1.1.5 with following exceptions:

- Table 6.4.1.1.5-1 is replaced by Table 16.4.1.2.5-1.

Table 16.4.1.2.5-1: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1,2,3,4	Freq1	Freq1
TDD configuration		1,4	Not Applicable	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
$BW_{channel}$	MHz	1,2,4	10: $N_{RB,c}$ = 52	
		3	20: $N_{RB,c}$ = 51	
Initial BWP Configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3,4	DLBWP.1.1 ULBWP.1.1	
DRX Cycle	ms	1,2,3,4	N/A	DRX.8[Note5]
PDSCH Reference measurement channel		1,4	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1,2,3,4	OP.1	
SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC Configuration		1,2,4	SMTC.1	
		3	SMTC.2	
TRS configuration		1,4	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
EPRE ratio of PSS to SSS	dB	1,2,3,4	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				

EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2	dBm/15 kHz	1,2,3,4	-98	-98
N_{oc} Note2	dBm/SCS	1,2,4	-98	-98
		3	-95	-95
$\hat{E}_s / I_{ot}$		1,2,3,4	3.3	3.3
$\hat{E}_s / N_{oc}$		1,2,3,4	3.3 Note 7	3.3 Note 7
SS-RSRP Note3	dBm/SCS	1,2,4	-94.7	-94.7
		3	-91.7	-91.7
Io Note3	dBm/9.36MHz	1,2,4	-65.08	-65.08
	dBm/18.36MHz	3	-62.16	-62.16
Propagation condition		1,2,3,4	AWGN	
SRS Config		1,2,4	SRSConf.1 Note6	SRSConf.3 Note6
		3	SRSConf.1 Note6	SRSConf.2 Note6

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: DRX related parameters are given in Table A.5-1
Note 6: SRS configs are given in Table 16.4.1.1.5-2
Note 7: With the test tolerance given in Annex F.

16.4.2

16.4.3 Timing advance for RedCap

16.4.3.0 Minimum conformance requirement

The timing advance is initiated from gNB to UE configured with only PCell, with MAC message that implies the adjustment of the timing advance, as defined in TS 38.321 [12] clause 5.2.

UE shall adjust the timing of its uplink transmission at time slot n+k+1 for a timing advance command received in time slot n, and the value of k is defined in TS 38.213 [8] clause 4.2. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 16.4.3.0-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS 38.213 [8].

Table 16.4.3.0-1: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	15	30
UE Timing Advance adjustment accuracy	±256 T_c	±256 T_c

16.4.3.1 NR SA FR1 timing advance adjustment accuracy for 1 Rx UE

16.4.3.1.1 Test purpose

To verify UE timing advance adjustment delay and accuracy requirement defined in TS 38.133 [6] clause 7.3A.

16.4.3.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.4.3.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.4.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.16.4.3.1.

16.4.3.1.4 Test description

16.4.3.1.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.4.3.1.4.1 with following exceptions:

- Table 6.4.3.1.4.1-1 is replaced by Table 16.4.3.1.4.1-1.
- Table 6.4.3.1.4.1-2 is replaced by Table 16.4.3.1.4.1-2.
- Table 6.4.3.1.4.1-3 is replaced by Table 16.4.3.1.4.1-3.

Table 16.4.3.1.4.1-1: Supported test configurations

Config	Description
16.4.3.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.4.3.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.4.3.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.4.3.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.4.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.4.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	Without LTE link		

Table 16.4.3.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.8.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.8.1-2
Initial UL BWP		ULBWP.0.1	As specified in Table A.8.2-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.8.2-2

Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For SCS = 15kHz : $N_{TA_new} = N_{TA_old} + 8192*T_c$ For SCS = 30kHz : $N_{TA_new} = N_{TA_old} + 4096*T_c$ (based on equation in TS 38.213 [8] clause 4.2)
T1	s	5	
T2	s	5	

16.4.3.1.4.2 Test Procedure

Same as the test procedure given in sub-clause 6.4.3.1.4.2.

16.4.3.1.4.3 Message Contents

Same as the message contents specified in sub-clause 6.4.3.1.4.3.

16.4.3.1.5 Test Requirement

Same as the test requirements given in sub-clause 6.4.3.1.5 with following exceptions:

- Table 6.4.3.1.5-1 is replaced by Table 16.4.3.1.5-1.
- Table 6.4.3.1.5-2 is replaced by Table 16.4.3.1.5-2.
- Table 6.4.3.1.5-3 is replaced by Table 16.4.3.1.5-3.

Table 16.4.3.1.5-1: Cell specific test parameters

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		20: $N_{RB,c}$ = 51	
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		20: $N_{RB,c}$ = 51	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
TRS Configuration	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Patterns			OP.1	
SMTC configuration	Config 1,2,4		SMTC.1 FR1	
	Config 3		SMTC.2 FR1	
SSB configuration	Config 1,2,4		SSB.1 FR1	
	Config 3		SSB.1 RedCap FR1	

PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	-98
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
Io Note3	Config 1,2,4	dBm/9.36MHz	-67.57
	Config 3	dBm/18.36MHz	-65.76
Propagation condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.4.3.1.5-2: Sounding Reference Symbol Configuration

Field		Value	Comment
c-SRS		12	Frequency hopping is disabled
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset	Config 1,2,4	sl5=2	Once every 5 slots
	Config 3	sl5=4	
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331.			

Table 16.4.3.1.5-3: UE Timing Advance adjustment accuracy

Sub Carrier Spacing, SCS kHz	15	30
UE Timing Advance adjustment accuracy	±344 T_c	±344 T_c

16.4.3.2 NR SA FR1 timing advance adjustment accuracy for 2 Rx UE

16.4.3.2.1 Test purpose

To verify UE timing advance adjustment delay and accuracy requirement defined in TS 38.133 [6] clause 7.3A.

16.4.3.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.4.3.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.4.3.0.

The normative reference for this requirement is TS 38.133 [6] clause A.16.4.3.2.

16.4.3.2.4 Test description

16.4.3.2.4.1 Initial conditions

Same as the initial conditions given in sub-clause 6.4.3.1.4.1 with following exceptions:

- Table 6.4.3.1.4.1-1 is replaced by Table 16.4.3.2.4.1-1.
- Table 6.4.3.1.4.1-2 is replaced by Table 16.4.3.2.4.1-2.
- Table 6.4.3.1.4.1-3 is replaced by Table 16.4.3.2.4.1-3.

Table 16.4.3.2.4.1-1: Supported test configurations

Config	Description
16.4.3.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.4.3.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.4.3.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.4.3.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.4.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.4.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.1	
Exceptions to connection diagram	Without LTE link		

Table 16.4.3.2.4.1-3: General test parameters

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.8.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.8.1-2
Initial UL BWP		ULBWP.0.1	As specified in Table A.8.2-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.8.2-2

Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For SCS = 15kHz : $N_{TA_new} = N_{TA_old} + 8192*T_c$ For SCS = 30kHz : $N_{TA_new} = N_{TA_old} + 4096*T_c$ (based on equation in TS38.213 section 4.2)
T1	s	5	
T2	s	5	

16.4.3.2.4.2 Test Procedure

Same as the test procedure given in sub-clause 6.4.3.1.4.2.

16.4.3.2.4.3 Message Contents

Same as the message contents specified in sub-clause 6.4.3.1.4.3.

16.4.3.2.5 Test Requirement

Same as the test requirements given in sub-clause 6.4.3.1.5 with following exceptions:

- Table 6.4.3.1.5-1 is replaced by Table 16.4.3.2.5-1.
- Table 6.4.3.1.5-2 is replaced by Table 16.4.3.2.5-2.
- Table 6.4.3.1.5-3 is replaced by Table 16.4.3.2.5-3.

Table 16.4.3.2.5-1: Cell specific test parameters

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		20: $N_{RB,c}$ = 51	
BWP BW	Config 1,4	MHz	10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52	
	Config 3		20: $N_{RB,c}$ = 51	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
TRS Configuration	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Patterns			OP.1	
SMTC configuration	Config 1,2,4		SMTC.1 FR1	
	Config 3		SMTC.2 FR1	
SSB configuration	Config 1,2,4		SSB.1 FR1	
	Config 3		SSB.1 RedCap FR1	

PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
N_{oc} Note2		dBm/15kHz	-98
N_{oc} Note2	Config 1,2,4	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
Io Note3	Config 1,2,4	dBm/9.36MHz	-67.57
	Config 3	dBm/18.36MHz	-65.76
Propagation condition			AWGN

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.4.3.2.5-2: Sounding Reference Symbol Configuration

Field		Value	Comment
c-SRS		12	Frequency hopping is disabled
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset	Config 1,2,4	sl5=2	Once every 5 slots
	Config 3	sl5=4	
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331.			

Table 16.4.3.2.5-3: UE Timing Advance adjustment accuracy

Sub Carrier Spacing, SCS kHz	15	30
UE Timing Advance adjustment accuracy	±344 T_c	±344 T_c

16.5 Signalling characteristics for RedCap

16.5.1 Radio link monitoring for RedCap

16.5.1.0 Minimum requirements

16.5.1.0.1 General

The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell as specified in TS 38.213 [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP. The SSB and SMTC in this section applies for both CD-SSB and NCD-SSB if it is not additional specified.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell.

The threshold Q_{out} is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out}$) as defined in Table 16.5.1.0.1-1. For SSB based radio link monitoring, $Q_{out_SSB,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 16.5.1.0.1-2. For CSI-RS based radio link monitoring, $Q_{out_CSI\text{-}RS,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 16.5.1.0.1-4.

The threshold Q_{in} is defined as the level at which the downlink radio link quality can be significantly more reliably received than at Q_{out} and shall correspond to the in-sync block error rate ($BLER_{in}$) as defined in Table 16.5.1.0.1-1. For SSB based radio link monitoring, $Q_{in_SSB,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 16.5.1.0.1-3. For CSI-RS based radio link monitoring, $Q_{in_CSI\text{-}RS,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 16.5.1.0.1-5.

The out-of-sync block error rate ($BLER_{out}$) and in-sync block error rate ($BLER_{in}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *RLM-IS-OOS-thresholdConfig* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 16.5.1.0.1-1 as default. All requirements here are applicable for BLER Configuration #0 in Table 16.5.1.0.1-1.

Table 16.5.1.0.1-1: Out-of-sync and in-sync block error rates

Configuration	$BLER_{out}$	$BLER_{in}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [3], where N_{RLM} is specified in Table 16.5.1.0.1-6 according TS 38.213 [3], and meet the requirements as specified in 38.133 [6] clause 8.1B. UE is not required to meet the requirements in 38.133 [6] clause 8.1B if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 16.5.1.0.1-2: PDCCH transmission parameters for out-of-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16; for RedCap UE with 1Rx branch. 8; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4dB
Bandwidth (PRBs)	48; for RedCap UE with 1Rx branch.

	24; for RedCap UE with 2Rx branches.
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 16.5.1.0.1-3: PDCCH transmission parameters for in-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8; for RedCap UE with 1Rx branch. 4; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	48; for RedCap UE with 1Rx branch. 24; for RedCap UE with 2Rx branches.
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 16.5.1.0.1-4: PDCCH transmission parameters for out-of-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16; for RedCap UE with 1Rx branch. 8; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	4dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 16.5.1.0.1-5: PDCCH transmission parameters for in-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8; for RedCap UE with 1Rx branch. 4; for RedCap UE with 2Rx branches.

Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 16.5.1.0.1-6: Maximum number of RLM-RS resources X_{RLM-RS}

Carrier frequency range of PCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1, ≤ 3 GHz[Note]	4	2
FR1, > 3 GHz[Note]	8	4
FR2	64	8
NOTE: For unpaired spectrum operation with Case C - 30 kHz SCS, 3GHz is replaced by 1.88GHz, as specified in clause 4.1 in TS 38.213 [3].		

When the UE transitions between RLM CD-SSB resource and RLM NCD-SSB resource during one evaluation period, the UE is allowed to restart the ongoing evaluation using the second SSB type after BWP switching. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second SSB type for each RLM-RS resource.

The requirements in 38.133 [6] clause 8.1.4 shall also apply except the scenarios described above.

The requirements in 38.133 [6] clause 8.1.5 shall apply.

When the downlink radio link quality on all the configured RLM-RS resources is worse than Q_{out}, Layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [13].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than $Q_{in,RedCap}$, layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [8]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval,RedCap}$.

When DRX is not used for RedCap UEs, $T_{Indication_interval,RedCap}$ is max(10ms, $T_{RLM-RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 38.133 [6] 8.1B.2 if the RLM-RS resource is SSB, or T_{CSI-RS} specified in 38.133 [6] clause 8.1B.3 if the RLM-RS resource is CSI-RS.

In case DRX is used for RedCap UEs, $T_{Indication_interval,RedCap}$ is max(10ms, 1.5 × DRX_cycle_length, 1.5 × $T_{RLM-RS,M}$)) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

When DRX is not used for HD-FDD RedCap UEs, $T_{Indication_interval,RedCap}$ is max(10ms, $T_{RLM-RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in 38.133 [6] clause 8.1B.2 if the RLM-RS resource is SSB, or T_{CSI-RS} specified in 38.133 [6] clause 8.1B.3 if the RLM-RS resource is CSI-RS, under the following condition

- For each RLM-RS configuration, at least one RLM-RS sample must fall with DL occasion within an indication period.

In case DRX is used for HD-FDD RedCap UEs, $T_{Indication_interval,RedCap}$ is max(10ms, 1.5 × DRX_cycle_length, 1.5 × $T_{RLM-RS,M}$)) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms, under the following condition

- For each RLM-RS configuration, at least one RLM-RS sample must fall with DL occasion within an indication period.

The requirements in 38.133 [6] clause 8.1.7 shall apply

The normative reference for this requirement is TS 38.133 [6] clauses 8.1B.1, 8.1B.2, 8.1B.3, 8.1B.4, 8.1B.5, 8.1B.6 and 8.1B.7.

16.5.1.0.2 Minimum conformance requirements for SSB-based RLM

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell, provided that the SSB configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in this clause.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB,RedCap}$ [ms] period becomes worse than the threshold $Q_{out_SSB,RedCap}$ within $T_{Evaluate_out_SSB,RedCap}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_SSB,RedCap}$ [ms] period becomes better than the threshold $Q_{in_SSB,RedCap}$ within $T_{Evaluate_in_SSB,RedCap}$ [ms] evaluation period.

$T_{Evaluate_out_SSB,RedCap}$ and $T_{Evaluate_in_SSB,RedCap}$ are defined in Table 16.5.1.0.2-1 and Table 16.5.1.0.2-2 for FR1 for UE with 2Rx RedCap and 1Rx RedCap, respectively.

Table 16.5.1.0.2-1: Evaluation period $T_{Evaluate_out_SSB,RedCap}$ and $T_{Evaluate_in_SSB,RedCap}$ for FR1 for 2Rx RedCap UE

Configuration	$T_{Evaluate_out_SSB,RedCap}$ (ms)	$T_{Evaluate_in_SSB,RedCap}$ (ms)
no DRX	Max(200, Ceil(10 × P) × T_{SSB})	Max(100, Ceil(5 × P) × T_{SSB})
DRX cycle≤320ms	Max(200, Ceil(15 × P) × Max(T_{DRX},T_{SSB}))	Max(100, Ceil(7.5 × P) × Max(T_{DRX},T_{SSB}))
DRX cycle>320ms	Ceil(10 × P) × T_{DRX}	Ceil(5 × P) × T_{DRX}
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

Table 16.5.1.0.2-2: Evaluation period $T_{Evaluate_out_SSB,RedCap}$ and $T_{Evaluate_in_SSB,RedCap}$ for FR1 for 1Rx RedCap UE

Configuration	$T_{Evaluate_out_SSB,RedCap}$ (ms)	$T_{Evaluate_in_SSB,RedCap}$ (ms)
no DRX	Max(400, Ceil(20 × P) × T_{SSB})	Max(100, Ceil(5 × P) × T_{SSB})
DRX cycle≤320ms	Max(400, Ceil(30 × P) × Max(T_{DRX},T_{SSB}))	Max(100, Ceil(7.5 × P) × Max(T_{DRX},T_{SSB}))
DRX cycle>320ms	Ceil(20 × P) × T_{DRX}	Ceil(5 × P) × T_{DRX}
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, and these measurement gaps are overlapping with some but not all occasions of the SSB; and

- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

If the high layer in TS 38.331 [13] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; otherwise $T_{SMTCperiod}$ follows *smtc1*.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

Longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Longer evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

For FR1, when the SSB for RLM is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

The normative reference for this requirement is TS 38.133 [6] clauses 8.1B.2.

16.5.1.0.3 Minimum conformance requirements for CSI-RS based RLM

The requirements in this clause apply for each CSI-RS based RLM-RS resource configured for PCell, provided that the CSI-RS configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in this clause. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI\text{-}RS,RedCap}$ ms period becomes worse than the threshold $Q_{out_CSI\text{-}RS,RedCap}$ within $T_{Evaluate_out_CSI\text{-}RS,RedCap}$ ms evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_CSI\text{-}RS,RedCap}$ ms period becomes better than the threshold $Q_{in_CSI\text{-}RS,RedCap}$ within $T_{Evaluate_in_CSI\text{-}RS,RedCap}$ ms evaluation period.

$T_{Evaluate_out_CSI\text{-}RS,RedCap}$ and $T_{Evaluate_in_CSI\text{-}RS,RedCap}$ are defined in Table 16.5.1.0.3-1 and Table 16.5.1.0.3-2 for FR1 for RedCap 2Rx RedCap and 1Rx RedCap, respectively.

Table 16.5.1.0.3-1: Evaluation period $T_{Evaluate_out_CSI\text{-}RS,RedCap}$ and $T_{Evaluate_in_CSI\text{-}RS,RedCap}$ for FR1 for 2Rx RedCap UE

Configuration	$T_{Evaluate_out_CSI\text{-}RS,RedCap}$ (ms)	$T_{Evaluate_in_CSI\text{-}RS,RedCap}$ (ms)
no DRX	$\max(200, \lceil M_{out,RedCap} \times P \rceil) \times T_{CSI\text{-}RS}$	$\max(100, \lceil M_{in,RedCap} \times P \rceil) \times T_{CSI\text{-}RS}$
DRX ≤ 320ms	$\max(200, \lceil 1.5 \times M_{out,RedCap} \times P \rceil) \times \max(T_{DRX}, T_{CSI\text{-}RS})$	$\max(100, \lceil 1.5 \times M_{in,RedCap} \times P \rceil) \times \max(T_{DRX}, T_{CSI\text{-}RS})$
DRX > 320ms	$\lceil M_{out,RedCap} \times P \rceil \times T_{DRX}$	$\lceil M_{in,RedCap} \times P \rceil \times T_{DRX}$
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{CSI\text{-}RS}$ equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

Table 16.5.1.0.3-2: Evaluation period $T_{Evaluate_out_CSI\text{-}RS,RedCap}$ and $T_{Evaluate_in_CSI\text{-}RS,RedCap}$ for FR1 for 1Rx RedCap UE

Configuration	$T_{Evaluate_out_CSI\text{-}RS,RedCap}$ (ms)	$T_{Evaluate_in_CSI\text{-}RS,RedCap}$ (ms)
no DRX	$\max(400, \lceil M_{out,RedCap} \times P \rceil) \times T_{CSI\text{-}RS}$	$\max(100, \lceil M_{in,RedCap} \times P \rceil) \times T_{CSI\text{-}RS}$
DRX ≤ 320ms	$\max(400, \lceil 1.5 \times M_{out,RedCap} \times P \rceil) \times \max(T_{DRX}, T_{CSI\text{-}RS})$	$\max(100, \lceil 1.5 \times M_{in,RedCap} \times P \rceil) \times \max(T_{DRX}, T_{CSI\text{-}RS})$
DRX > 320ms	$\lceil M_{out,RedCap} \times P \rceil \times T_{DRX}$	$\lceil M_{in,RedCap} \times P \rceil \times T_{DRX}$
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{CSI\text{-}RS}$ equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, and these measurement gaps are overlapping with some but not all occasions of the CSI-RS; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

Longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Longer evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS for RLM measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for RLM without any restriction.

The normative reference for this requirement is TS 38.133 [6] clauses 8.1B.3.

16.5.1.1 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE

16.5.1.1.1 Test purpose

To verify that the 1Rx RedCap UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell for 1Rx RedCap UE. This test will partly verify the FR1 radio link monitoring requirements in 38.133 [6] clause 8.1B.2.

16.5.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 RX from Release 17 onwards.

16.5.1.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.1.

16.5.1.1.4 Test description

Same as the test description given in clause 6.5.1.1.4.

16.5.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.1.4.1 with following exceptions:

- Table 6.5.1.1.4.1-1 is replaced by Table 16.5.1.1.4.1-1.
- Table 6.5.1.1.4.1-2 is replaced by Table 16.5.1.1.4.1-2.
- Table 6.5.1.1.4.1-4 is replaced by Table 16.5.1.1.4.1-3.

Table 16.5.1.1.4.1-1: Supported test configurations

Configuration	Description
16.5.1.1-1	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, FDD
16.5.1.1-2	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, TDD
16.5.1.1-3	SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz, TDD
16.5.1.1-4	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, HD-FDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.1.1.4.1-3: General test parameters

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
DL initial BWP configuration	Config 1,2,3,4		DLBWP.0.1
DL dedicated BWP configuration	Config 1,2,3,4		DLBWP.1.1
UL initial BWP configuration	Config 1,2,3,4		ULBWP.0.1
UL dedicated BWP configuration	Config 1,2,3,4		ULBWP.1.1
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.3.2 FDD
	Config 2		CCR.4.2 TDD
	Config 3		CCR.5.2 TDD
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1,2,3,4		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		15 kHz

	Config 3		30 kHz
PRACH Configuration	Config 1,2,3,4		PRACH.1 FR1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.88
T3		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.1.4.2 Test Procedure

Same as the test procedure given in clause 6.5.1.1.4.2.

16.5.1.1.4.3 Message Contents

Same as the message contents given in clause 6.5.1.1.4.3 with the following exceptions.

Table 16.5.1.1.4.3-1: PDCCH *Search Space*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel16	n1		
}			
}			

16.5.1.1.5 Test Requirement

Same as the test requirements given in clause 6.5.1.1.5 with following exceptions:

- Table 6.5.1.1.5-1 is replaced by Table 16.5.1.1.5-1.

Table 16.5.1.1.5-1: Cell specific test parameters (Cell 1)

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1,2,4	dB	1.8	-6.2	-15.8
	Config 3		1.8	-6.2	-15.8
N_{oc}	Config 1,2,4	dBm/15 kHz	-98		
	Config 3		-98		
N_{oc}	Config 1,2,4	dBm/SCS	-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure 6.5.1.1.4-1.					

16.5.1.2 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE

16.5.1.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell for 2Rx RedCap UE. This test will partly verify the FR1 radio link monitoring requirements in 38.133 [6] clause 8.1B.2.

16.5.1.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 RX from Release 17 onwards.

16.5.1.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.2.

16.5.1.2.4 Test description

Same as the test description given in clause 6.5.1.1.4.

16.5.1.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.1.4.1 with following exceptions:

- Table 6.5.1.1.4.1-1 is replaced by Table 16.5.1.2.4.1-1.

- Table 6.5.1.1.4.1-2 is replaced by Table 16.5.1.2.4.1-2.
- Table 6.5.1.1.4.1-4 is replaced by Table 16.5.1.2.4.1-3.

Table 16.5.1.2.4.1-1: Supported test configurations

Configuration	Description
16.5.1.2-1	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, FDD
16.5.1.2-2	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, TDD
16.5.1.2-3	SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz, TDD
16.5.1.2-4	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, HD-FDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.5.1.2.4.1-3: General test parameters

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
DL initial BWP configuration	Config 1,2,3,4		DLBWP.0.1
DL dedicated BWP configuration	Config 1,2,3,4		DLBWP.1.1
UL initial BWP configuration	Config 1,2,3,4		ULBWP.0.1
UL dedicated BWP configuration	Config 1,2,3,4		ULBWP.1.1
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1,2,3,4		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1,2,3,4		PRACH.1 FR1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal

Correlation Matrix and Antenna Configuration			2x2 low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.2.4.2 Test Procedure

Same as the test procedure given in clause 6.5.1.1.4.2.

16.5.1.2.4.3 Message Contents

Same as the message contents given in clause 6.5.1.1.4.3.

16.5.1.2.5 Test Requirement

Same as the test requirements given in clause 6.5.1.1.5 with following exceptions:

- Table 6.5.1.1.5-1 is replaced by Table 16.5.1.2.5-1.

Table 16.5.1.2.5-1: Cell specific test parameters (Cell 1)

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB	0		
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PSS to SSS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			
EPRE ratio of OCNG DMRS to SSS	dB			

EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1,2,4	dB	1.8Note 5	-6.2Note 5	-15.8Note 5
	Config 3		1.8Note 5	-6.2Note 5	-15.8Note 5
N_{oc}	Config 1,2,4	dBm/15 kHz	-98		
	Config 3		-98		
N_{oc}	Config 1,2,4	dBm/SCS	-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure 6.5.1.1.4-1.
Note 5: Including the test tolerance given in Annex F.

16.5.1.3 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE

16.5.1.3.1 Test purpose

To verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in 38.133 [6] clause 8.1B.

16.5.1.3.2 Test applicability

This test applies to all types of NR RedCap UE with 1 RX from Release 17 onwards.

16.5.1.3.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.3.

16.5.1.3.4 Test description

Same as the test description given in clause 6.5.1.2.4.

16.5.1.3.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.2.4.1 with following exceptions:

- Table 6.5.1.2.4.1-1 is replaced by Table 16.5.1.3.4.1-1.
- Table 6.5.1.2.4.1-2 is replaced by Table 16.5.1.3.4.1-2.
- Table 6.5.1.2.4.1-4 is replaced by Table 16.5.1.3.4.1-3.

Table 16.5.1.3.4.1-1: Supported test configurations

Configuration	Description
16.5.1.3-1	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, FDD
16.5.1.3-2	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, TDD
16.5.1.3-3	SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz, TDD
16.5.1.3-4	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, HD-FDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.1.3.4.1-3: General test parameters

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
		Config 4		HD-FDD
$BW_{channel}$		Config 1,2,4	MHz	10: $N_{RB,c}$ = 52
		Config 3		20: NRB,c = 51
DL initial BWP configuration		Config 1,2,3,4		DLBWP.0.1
DL dedicated BWP configuration		Config 1,2,3,4		DLBWP.1.1
UL initial BWP configuration		Config 1,2,3,4		ULBWP.0.1
UL dedicated BWP configuration		Config 1,2,3,4		ULBWP.1.1
TDD Configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1,4		CCR.3.1 FDD
		Config 2		CCR.4.1 TDD
		Config 3		CCR.5.1 TDD
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration		Config 1,2,3,4		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1,2,4		15 kHz
		Config 3		30 kHz
PRACH Configuration		Config 1,2,3,4		PRACH.1 FR1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x1 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0

	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.44
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.3.4.2 Test Procedure

Same as the test procedure given in clause 6.5.1.2.4.2.

16.5.1.3.4.3 Message Contents

Same as the message contents given in clause 6.5.1.2.4.3.

16.5.1.3.5 Test Requirement

Same as the test requirements given in clause 6.5.1.2.5 with following exceptions:

- Table 6.5.1.2.5-1 is replaced by Table 16.5.1.3.5-1.

Table 16.5.1.3.5-1: Cell specific test parameters (Cell 1)

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,2,4	dB	1.8	-6.2	-15.8	-5.3	1.8

	Config 3		1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1,2,4	dBm/15 kHz	-98				
	Config 3		-98				
N_{oc}	Config 1,2,4	dBm/SCS	-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 6.5.1.2.1-1.							

16.5.1.4 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE

16.5.1.4.1 Test purpose

To verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in 38.133 [6] clause 8.1B.

16.5.1.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2 RX from Release 17 onwards.

16.5.1.4.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.4.

16.5.1.4.4 Test description

Same as the test description given in clause 6.5.1.2.4.

16.5.1.4.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.2.4.1 with following exceptions:

- Table 6.5.1.2.4.1-1 is replaced by Table 16.5.1.4.4.1-1.
- Table 6.5.1.2.4.1-2 is replaced by Table 16.5.1.4.4.1-2.
- Table 6.5.1.2.4.1-4 is replaced by Table 16.5.1.4.4.1-3.

Table 16.5.1.4.4.1-1: Supported test configurations

Configuration	Description
16.5.1.4-1	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, FDD
16.5.1.4-2	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, TDD
16.5.1.4-3	SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz, TDD
16.5.1.4-4	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, HD-FDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.4.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.5.1.4.4.1-3: General test parameters

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
		Config 4		HD-FDD
$BW_{channel}$		Config 1,2,4	MHz	10: $N_{RB,c}$ = 52
		Config 3		20: NRB,c = 51
DL initial BWP configuration		Config 1,2,3,4		DLBWP.0.1
DL dedicated BWP configuration		Config 1,2,3,4		DLBWP.1.1
UL initial BWP configuration		Config 1,2,3,4		ULBWP.0.1
UL dedicated BWP configuration		Config 1,2,3,4		ULBWP.1.1
TDD Configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration		Config 1,2,3,4		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1,2,4		15 kHz
		Config 3		30 kHz
PRACH Configuration		Config 1,2,3,4		PRACH.1 FR1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy		dB	4

	to average SSS RE energy		
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.4.4.2 Test Procedure

Same as the test procedure given in clause 6.5.1.2.4.2.

16.5.1.4.4.3 Message Contents

Same as the message contents given in clause 6.5.1.2.4.3.

16.5.1.4.5 Test Requirement

Same as the test requirements given in clause 6.5.1.2.5 with following exceptions:

- Table 6.5.1.2.5-1 is replaced by Table 16.5.1.4.5-1.

Table 16.5.1.4.5-1: Cell specific test parameters (Cell 1)

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,2,4	dB	1.8 Note 6	-6.2 Note 6	-15.8 Note 6	-5.3 Note 6	1.8 Note 6
	Config 3		1.8 Note 6	-6.2 Note 6	-15.8 Note 6	-5.3 Note 6	1.8 Note 6
N_{oc}	Config 1,2,4	dBm/15 kHz	-98				

	Config 3		-98
N_{oc}	Config 1,2,4	dBm/SCS	-98
	Config 3		-95
Propagation condition			TDL-C 300ns 100Hz
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.			
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.			
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 6.5.1.2.1-1.			
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band.			
Note 6: Including the test tolerance given in Annex F.			

16.5.1.5 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE

16.5.1.5.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used for 1Rx RedCap UE. This test will partly verify the FR1 radio link monitoring requirements in 38.133 [6] clause 8.1B.

16.5.1.5.2 Test applicability

This test applies to all types of NR RedCap UE with 1 RX from Release 17 onwards.

16.5.1.5.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.5.

16.5.1.5.4 Test description

Same as the test description given in clause 6.5.1.3.4.

16.5.1.5.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.3.4.1 with following exceptions:

- Table 6.5.1.3.4.1-1 is replaced by Table 16.5.1.5.4.1-1.
- Table 6.5.1.3.4.1-2 is replaced by Table 16.5.1.5.4.1-2.
- Table 6.5.1.3.4.1-4 is replaced by Table 16.5.1.5.4.1-3.

Table 16.5.1.5.4.1-1: Supported test configurations for NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE

Configuration	Description
16.5.1.5-1	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, FDD
16.5.1.5-2	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, TDD
16.5.1.5-3	SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz, TDD
16.5.1.5-4	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, HD-FDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.5.4.1-2: Initial conditions for NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.5.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.1.5.4.1-3: General test parameters for NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
	Config 4		10: $N_{RB,c}$ = 52
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
	Config 4		Not Applicable
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.3.2 FDD
	Config 2		CCR.4.2 TDD
	Config 3		CCR.5.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz

	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 4		Table A.7.1, PRACH.1 FR1
	Config 3		Table A.7.1, PRACH.1 FR1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.5.4.2 Test Procedure

Same as the test procedure given in clause 6.5.1.3.4.2.

16.5.1.5.4.3 Message Contents

Same as the message contents given in clause 6.5.1.3.4.3 with the following exceptions.

Table 16.5.1.5.4.3-1: PDCCH *Search Space*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162

Information Element	Value/remark	Comment	Condition
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel16	n1		
}			
}			

16.5.1.5.5 Test Requirement

Same as the test requirements given in clause 6.5.1.3.5 with following exceptions:

- Table 6.5.1.3.5-1 is replaced by Table 16.5.1.5.5-1.

Table 16.5.1.5.5-1: Cell specific test parameters (Cell 1) for NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1.8	-6.2	-15.8
	Config 2		1.8	-6.2	-15.8
	Config 3		1.8	-6.2	-15.8
N_{oc}	Config 1, 4	dBm/15 kHz	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1, 4	dBm/SCS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure 6.5.1.3.4-1.					

16.5.1.6 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

16.5.1.6.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used for 2Rx RedCap UE. This test will partly verify the FR1 radio link monitoring requirements in 38.133 [6] clause 8.1B.

16.5.1.6.2 Test applicability

This test applies to all types of NR RedCap UE with 2 RX from Release 17 onwards.

16.5.1.6.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.6.

16.5.1.6.4 Test description

Same as the test description given in clause 6.5.1.3.4.

16.5.1.6.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.3.4.1 with following exceptions:

- Table 6.5.1.3.4.1-1 is replaced by Table 16.5.1.6.4.1-1.
- Table 6.5.1.3.4.1-2 is replaced by Table 16.5.1.6.4.1-2.
- Table 6.5.1.3.4.1-4 is replaced by Table 16.5.1.6.4.1-3.

Table 16.5.1.6.4.1-1: Supported test configurations for NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

Configuration	Description
16.5.1.6-1	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, FDD
16.5.1.6-2	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, TDD
16.5.1.6-3	SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz, TDD
16.5.1.6-4	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, HD-FDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.6.4.1-2: Initial conditions for NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.6.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.5.1.6.4.1-3: General test parameters for NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52
	Config 2		10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
	Config 4		10: $N_{RB,c}$ = 52
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1

DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
	Config 4		Not Applicable
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 4		Table A.7.1, PRACH.1 FR1
	Config 3		Table A.7.1, PRACH.1 FR1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*

T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.6.4.2 Test Procedure

Same as the test procedure given in clause 6.5.1.3.4.2.

16.5.1.6.4.3 Message Contents

Same as the message contents given in clause 6.5.1.3.4.3.

16.5.1.6.5 Test Requirement

Same as the test requirements given in clause 6.5.1.3.5 with following exceptions:

- Table 6.5.1.3.5-1 is replaced by Table 16.5.1.6.5-1.

Table 16.5.1.6.5-1: Cell specific test parameters (Cell 1) for NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1.8	-6.2	-15.8
	Config 2		1.8	-6.2	-15.8
	Config 3		1.8	-6.2	-15.8
N_{oc}	Config 1, 4	dBm/15 kHz	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1, 4	dBm/SCS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS Res.
Note 4:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure 6.5.1.3.4-1.
Note 5:	The SNR values are specified for testing a UE which supports 2RX on at least one band.

16.5.1.7 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE

16.5.1.7.1 Test purpose

To verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in 38.133 [6] clause 8.1B.

16.5.1.7.2 Test applicability

This test applies to all types of NR RedCap UE with 1 RX from Release 17 onwards supporting long DRX cycle.

16.5.1.7.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.7.

16.5.1.7.4 Test description

Same as the test description given in clause 6.5.1.4.4.

16.5.1.7.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.4.4.1 with following exceptions:

- Table 6.5.1.4.4.1-1 is replaced by Table 16.5.1.7.4.1-1.
- Table 6.5.1.4.4.1-2 is replaced by Table 16.5.1.7.4.1-2.
- Table 6.5.1.4.4.1-4 is replaced by Table 16.5.1.7.4.1-3.

Table 16.5.1.7.4.1-1: Supported test configurations

Configuration	Description
16.5.1.7-1	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, FDD
16.5.1.7-2	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, TDD
16.5.1.7-3	SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz, TDD
16.5.1.7-4	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, HD-FDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.7.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.7.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.

	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.1.7.4.1-3: General test parameters

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
		Config 4		HD-FDD
$BW_{channel}$		Config 1,2,4	MHz	10: $N_{RB,c}$ = 52
		Config 3		20: NRB,c = 51
DL initial BWP configuration		Config 1,2,3,4		DLBWP.0.1
DL dedicated BWP configuration		Config 1,2,3,4		DLBWP.1.1
UL initial BWP configuration		Config 1,2,3,4		ULBWP.0.1
UL dedicated BWP configuration		Config 1,2,3,4		ULBWP.1.1
TDD Configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1,4		CCR.3.1 FDD
		Config 2		CCR.4.1 TDD
		Config 3		CCR.5.1 TDD
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration		Config 1,2,3,4		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1,2,4		15 kHz
		Config 3		30 kHz
PRACH Configuration		Config 1,2,3,4		PRACH.1 FR1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x1 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS		dB	4

	energy to average SSS RE energy		
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.24
T4		s	0.2
T5		s	1.88
D1		s	1.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.7.4.2 Test Procedure

Same as the test procedure given in clause 6.5.1.4.4.2.

16.5.1.7.4.3 Message Contents

Same as the message contents given in clause 6.5.1.4.4.3.

16.5.1.7.5 Test Requirement

Same as the test requirements given in clause 6.5.1.4.5 with following exceptions:

- Table 6.5.1.4.5-1 is replaced by Table 16.5.1.7.5-1.

Table 16.5.1.7.5-1: Cell specific test parameters (Cell 1)

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,2,4	dB	1.8	-6.2	-15.8	-5.3	1.8
	Config 3		1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	Config 1,2,4	dBm/15 kHz	-98				
	Config 3		-98				
N_{oc}	Config 1,2,4	dBm/SCS	-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 6.5.1.4.1-1.

16.5.1.8 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

16.5.1.8.1 Test purpose

To verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in 38.133 [6] clause 8.1B.

16.5.1.8.2 Test applicability

This test applies to all types of NR RedCap UE with 2 RX from Release 17 onwards.

16.5.1.8.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.8.

16.5.1.8.4 Test description

Same as the test description given in clause 6.5.1.4.4.

16.5.1.8.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.4.4.1 with following exceptions:

- Table 6.5.1.4.4.1-1 is replaced by Table 16.5.1.8.4.1-1.
- Table 6.5.1.4.4.1-2 is replaced by Table 16.5.1.8.4.1-2.
- Table 6.5.1.4.4.1-4 is replaced by Table 16.5.1.8.4.1-3.

Table 16.5.1.8.4.1-1: Supported test configurations

Configuration	Description
16.5.1.8-1	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, FDD
16.5.1.8-2	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, TDD
16.5.1.8-3	SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz, TDD
16.5.1.8-4	SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz, HD-FDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.8.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.8.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram		

Table 16.5.1.8.4.1-3: General test parameters

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
		Config 4		HD-FDD
$BW_{channel}$		Config 1,2,4	MHz	10: $N_{RB,c}$ = 52
		Config 3		20: $N_{RB,c}$ = 51
DL initial BWP configuration		Config 1,2,3,4		DLBWP.0.1
DL dedicated BWP configuration		Config 1,2,3,4		DLBWP.1.1
UL initial BWP configuration		Config 1,2,3,4		ULBWP.0.1
UL dedicated BWP configuration		Config 1,2,3,4		ULBWP.1.1
TDD Configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration		Config 1,2,3,4		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1,2,4		15 kHz
		Config 3		30 kHz
PRACH Configuration		Config 1,2,3,4		PRACH.1 FR1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4

	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.64
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.8.4.2 Test Procedure

Same as the test procedure given in clause 6.5.1.4.4.2.

16.5.1.8.4.3 Message Contents

Same as the message contents given in clause 6.5.1.4.4.3.

16.5.1.8.5 Test Requirement

Same as the test requirements given in clause 6.5.1.4.5 with following exceptions:

- Table 6.5.1.4.5-1 is replaced by Table 16.5.1.8.5-1.

Table 16.5.1.8.5-1: Cell specific test parameters (Cell 1)

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,2,4	dB	1.8 Note 6	-6.2 Note 6	-15.8 Note 6	-5.3 Note 6	1.8 Note 6
	Config 3		1.8 Note 6	-6.2 Note 6	-15.8 Note 6	-5.3 Note 6	1.8 Note 6
N_{oc}	Config 1,2,4	dBm/15 kHz	-98				
	Config 3		-98				
N_{oc}	Config 1,2,4	dBm/SCS	-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure 6.5.1.4.1-1.
Note 5:	The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 6:	Including the test tolerance given in Annex F.

16.5.1.9 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE

16.5.1.9.1 Test purpose

To verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used for 1 Rx RedCap UE. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in 38.133 [6] clause 8.1B.3.

16.5.1.9.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards supporting CSI-RS based RLM.

16.5.1.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.9.

16.5.1.9.4 Test description

Same as the test description given in clause 6.5.1.5.4.

16.5.1.9.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.5.4.1 with following exceptions:

- Table 6.5.1.5.4.1-1 is replaced by Table 16.5.1.9.4.1-1.
- Table 6.5.1.5.4.1-2 is replaced by Table 16.5.1.9.4.1-2.
- Table 6.5.1.5.4.1-3 is replaced by Table 16.5.1.9.4.1-3.

Table 16.5.1.9.4.1-1: Supported test configurations

Configuration	Description
16.5.1.9-1	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, FDD duplex mode
16.5.1.9-2	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, TDD duplex mode
16.5.1.9-3	30 kHz SSB SCS, 30 kHz data SCS, 20 MHz bandwidth, TDD duplex mode
16.5.1.9-4	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.9.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.9.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.

Connection Diagram	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.1.9.4.1-3: General test parameters

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
		Config 4		HD-FDD
TDD Configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
DL initial BWP configuration				DLBWP.0.1
DL dedicated BWP configuration				DLBWP.1.1
UL initial BWP configuration				ULBWP.0.1
UL dedicated BWP configuration				ULBWP.1.1
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1,4		CCR.3.2 FDD
		Config 2		CCR.4.2 TDD
		Config 3		CCR.5.2 TDD
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration				SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1,2,4		15 kHz
		Config 3		30 kHz
TRS configuration		Config 1,4		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
CSI-RS for RLM		Config 1,4		Resource #4 in TRS.1.1 FDD
		Config 2		Resource #4 in TRS.1.1 TDD
		Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH				TCI.State.2
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x1 Low
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				OFF
Gap pattern ID				gp0
Layer 3 filtering				Enabled
T310 timer			ms	0
T311 timer			ms	1000
N310				1
N311				1
CSI-RS configuration		Config 1,4		CSI-RS.1.1 FDD
		Config 2		CSI-RS.1.1 TDD
		Config 3		CSI-RS.2.1 TDD
T1			s	0.2

T2	s	0.88
T3	s	0.88
D1	s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.		

16.5.1.9.4.2 Test procedure

Same as the test procedure given in clause 6.5.1.5.4.2.

16.5.1.9.4.3 Message contents

Same as the message contents given in clause 6.5.1.5.4.3 with the following exceptions.

Table 16.5.1.9.4.3-1: PDCCH *Search Space*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel16	n1		
}			
}			

16.5.1.9.5 Test requirement

Same as the test requirements given in clause 6.5.1.5.5 with following exceptions:

- Table 6.5.1.5.5-1 is replaced by Table 16.5.1.9.5-1.

Table 16.5.1.9.5-1: Cell specific test parameters

Parameter	**Unit**	**Test 1**		
		T1	**T2**	**T3**
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			
EPRE ratio of OCNG DMRS to SSS	dB			
EPRE ratio of OCNG to OCNG DMRS	dB			
SNR on RLM-RS	dB	1.8	-6.2	-15.8
N_{oc}	dBm/15KHz	-98		
Propagation condition		TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1. Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.1.5.4-1.				

16.5.1.10 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE

16.5.1.10.1 Test purpose

To verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used for 2 Rx RedCap UE. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in 38.133 [6] clause 8.1B.3.

16.5.1.10.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting CSI-RS based RLM.

16.5.1.10.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.10.

16.5.1.10.4 Test description

Same as the test description given in clause 6.5.1.5.4.

16.5.1.10.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.5.4.1 with following exceptions:

- Table 6.5.1.5.4.1-1 is replaced by Table 16.5.1.10.4.1-1.
- Table 6.5.1.5.4.1-2 is replaced by Table 16.5.1.10.4.1-2.
- Table 6.5.1.5.4.1-3 is replaced by Table 16.5.1.10.4.1-3.

Table 16.5.1.10.4.1-1: Supported test configurations

Configuration	Description
16.5.1.10-1	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, FDD duplex mode
16.5.1.10-2	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, TDD duplex mode
16.5.1.10-3	30 kHz SSB SCS, 30 kHz data SCS, 20 MHz bandwidth, TDD duplex mode
16.5.1.10-4	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.10.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.10.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.5.1.10.4.1-3: General test parameters

Parameter	Unit	Value
		Test 1

Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration			DLBWP.0.1
DL dedicated BWP configuration			DLBWP.1.1
UL initial BWP configuration			ULBWP.0.1
UL dedicated BWP configuration			ULBWP.1.1
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1,4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
SSB index assigned as BFD-RS			0
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.10.4.2 Test procedure

Same as the test procedure given in clause 6.5.1.5.4.2.

16.5.1.10.4.3 Message contents

Same as the message contents given in clause 6.5.1.5.4.3.

16.5.1.10.5 Test requirement

Same as the test requirements given in clause 6.5.1.5.5 with following exceptions:

- Table 6.5.1.5.5-1 is replaced by Table 16.5.1.10.5-1.

Table 16.5.1.10.5-1: Cell specific test parameters

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			
EPRE ratio of OCNG DMRS to SSS	dB			
EPRE ratio of OCNG to OCNG DMRS	dB			
SNR on RLM-RS	dB	1.8	-6.2	-15.8
N_{oc}	dBm/15KHz	-98		
Propagation condition		TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.1.5.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.

16.5.1.11 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE

16.5.1.11.1 Test purpose

To verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in 38.133 [6] clause 8.1B.3.

16.5.1.11.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards supporting CSI-RS based RLM.

16.5.1.11.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.11.

16.5.1.11.4 Test description

Same as the test description given in clause 6.5.1.6.4.

16.5.1.11.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.6.4.1 with following exceptions:

- Table 6.5.1.6.4.1-1 is replaced by Table 16.5.1.11.4.1-1.
- Table 6.5.1.6.4.1-2 is replaced by Table 16.5.1.11.4.1-2.
- Table 6.5.1.6.4.1-3 is replaced by Table 16.5.1.11.4.1-3.

Table 16.5.1.11.4.1-1: Supported test configurations

Configuration	Description
16.5.1.11-1	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, FDD duplex mode
16.5.1.11-2	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, TDD duplex mode
16.5.1.11-3	30 kHz SSB SCS, 30 kHz data SCS, 20 MHz bandwidth, TDD duplex mode
16.5.1.11-4	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.11.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.11.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.1.11.4.1-3: General test parameters

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration			DLBWP.0.1
DL dedicated BWP configuration			DLBWP.1.1
UL initial BWP configuration			ULBWP.0.1
UL dedicated BWP configuration			ULBWP.1.1
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.3.1 FDD
	Config 2		CCR.4.1 TDD
	Config 3		CCR.5.1 TDD
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1,4		TRS.1.1 FDD

		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
CSI-RS for RLM		Config 1,4		Resource #4 in TRS.1.1 FDD
		Config 2		Resource #4 in TRS.1.1 TDD
		Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH				TCI.State.2
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x1 Low
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				OFF
Gap pattern ID				N.A
Layer 3 filtering				Enabled
T310 timer			ms	2000
T311 timer			ms	1000
N310				1
N311				1
CSI-RS configuration		Config 1,4		CSI-RS.1.1 FDD
		Config 2		CSI-RS.1.1 TDD
		Config 3		CSI-RS.2.1 TDD
T1			s	0.2
T2			s	0.2
T3			s	0.488
T4			s	0.2
T5			s	1.88
T6			s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

16.5.1.11.4.2 Test procedure

Same as the test procedure given in clause 6.5.1.6.4.2.

16.5.1.11.4.3 Message contents

Same as the message contents given in clause 6.5.1.6.4.3.

16.5.1.11.5 Test requirement

Same as the test requirements given in clause 6.5.1.6.5 with following exceptions:

- Table 6.5.1.6.5-1 is replaced by Table 16.5.1.11.5-1.

Table 16.5.1.11.5-1: Cell specific test parameters

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5

EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					
SNR on RLM-RS	dB	1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	dBm/15kHz	-98				
Propagation condition		TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 6.5.1.6.4-1.

16.5.1.12 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE

16.5.1.12.1 Test purpose

To verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in 38.133 [6] clause 8.1B.3.

16.5.1.12.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting CSI-RS based RLM.

16.5.1.12.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.12.

16.5.1.12.4 Test description

Same as the test description given in clause 6.5.1.6.4.

16.5.1.12.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.6.4.1 with following exceptions:

- Table 6.5.1.6.4.1-1 is replaced by Table 16.5.1.12.4.1-1.
- Table 6.5.1.6.4.1-2 is replaced by Table 16.5.1.12.4.1-2.
- Table 6.5.1.6.4.1-3 is replaced by Table 16.5.1.12.4.1-3.

Table 16.5.1.12.4.1-1: Supported test configurations

Configuration	Description
16.5.1.12-1	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, FDD duplex mode
16.5.1.12-2	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, TDD duplex mode

16.5.1.12-3	30 kHz SSB SCS, 30 kHz data SCS, 20 MHz bandwidth, TDD duplex mode
16.5.1.12-4	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.12.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.12.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.5.1.12.4.1-3: General test parameters

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration			DLBWP.0.1
DL dedicated BWP configuration			DLBWP.1.1
UL initial BWP configuration			ULBWP.0.1
UL dedicated BWP configuration			ULBWP.1.1
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1,4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
SSB index assigned as BFD-RS			0
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4

	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				OFF
Gap pattern ID				N.A
Layer 3 filtering				Enabled
T310 timer			ms	1000
T311 timer			ms	1000
N310				1
N311				1
CSI-RS configuration		Config 1,4		CSI-RS.1.1 FDD
		Config 2		CSI-RS.1.1 TDD
		Config 3		CSI-RS.2.1 TDD
T1			s	0.2
T2			s	0.2
T3			s	0.44
T4			s	0.2
T5			s	0.88
T6			s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

16.5.1.12.4.2 Test procedure

Same as the test procedure given in clause 6.5.1.6.4.2.

16.5.1.12.4.3 Message contents

Same as the message contents given in clause 6.5.1.6.4.3.

16.5.1.12.5 Test requirement

Same as the test requirements given in clause 6.5.1.6.5 with following exceptions:

- Table 6.5.1.6.5-1 is replaced by Table 16.5.1.12.5-1.

Table 16.5.1.12.5-1: Cell specific test parameters

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					
SNR on RLM-RS	dB	1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	dBm/15kHz	-98				
Propagation condition		TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 6.5.1.6.4-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band.

16.5.1.13 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE

16.5.1.13.1 Test purpose

To verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used for 1 Rx RedCap UE. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in 38.133 [6] clause 8.1B.3.

16.5.1.13.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards supporting CSI-RS based RLM and long DRX cycle.

16.5.1.13.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.13.

16.5.1.13.4 Test description

Same as the test description given in clause 6.5.1.7.4.

16.5.1.13.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.7.4.1 with following exceptions:

- Table 6.5.1.7.4.1-1 is replaced by Table 16.5.1.13.4.1-1.
- Table 6.5.1.7.4.1-2 is replaced by Table 16.5.1.13.4.1-2.
- Table 6.5.1.7.4.1-3 is replaced by Table 16.5.1.13.4.1-3.

Table 16.5.1.13.4.1-1: Supported test configurations

Configuration	Description
16.5.1.13-1	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, FDD duplex mode
16.5.1.13-2	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, TDD duplex mode
16.5.1.13-3	30 kHz SSB SCS, 30 kHz data SCS, 20 MHz bandwidth, TDD duplex mode
16.5.1.13-4	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.13.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.13.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.1.13.4.1-3: General test parameters

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
		Config 4		HD-FDD
TDD Configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
DL initial BWP configuration				DLBWP.0.1
DL dedicated BWP configuration				DLBWP.1.1
UL initial BWP configuration				ULBWP.0.1
UL dedicated BWP configuration				ULBWP.1.1
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1,4		CCR.3.2 FDD
		Config 2		CCR.4.2 TDD
		Config 3		CCR.5.2 TDD
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration				SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1,2,4		15 kHz
		Config 3		30 kHz
TRS configuration		Config 1,4		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
CSI-RS for RLM		Config 1,4		Resource #4 in TRS.1.1 FDD
		Config 2		Resource #4 in TRS.1.1 TDD
		Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH				TCI.State.2
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x1 Low
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				DRX.3
Gap pattern ID				N.A
Layer 3 filtering				Enabled
T310 timer			ms	0
T311 timer			ms	1000
N310				1
N311				1

CSI-RS configuration	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	2.48
T3		s	2.48
D1		s	2.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.13.4.2 Test procedure

Same as the test procedure given in clause 6.5.1.7.4.2.

16.5.1.13.4.3 Message contents

Same as the message contents given in clause 6.5.1.7.4.3 with the following exceptions.

Table 16.5.1.13.4.3-1: PDCCH *Search Space*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-162			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel16	n1		
}			
}			

16.5.1.13.5 Test requirement

Same as the test requirements given in clause 6.5.1.7.5 with following exceptions:

- Table 6.5.1.7.5-1 is replaced by Table 16.5.1.13.5-1.

Table 16.5.1.13.5-1: Cell specific test parameters

Parameter	**Unit**	**Test 1**		
		T1	**T2**	**T3**
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			
EPRE ratio of OCNG DMRS to SSS	dB			
EPRE ratio of OCNG to OCNG DMRS	dB			
SNR on RLM-RS	dB	1.8	-6.2	-15.8
N_{oc}	dBm/15KHz	-98		
Propagation condition		TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.1.7.4-1.

16.5.1.14 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE

16.5.1.14.1 Test purpose

To verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used for 2 Rx RedCap UE. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in 38.133 [6] clause 8.1B.3.

16.5.1.14.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting CSI-RS based RLM and long DRX cycle.

16.5.1.14.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.14.

16.5.1.14.4 Test description

Same as the test description given in clause 6.5.1.7.4.

16.5.1.14.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.7.4.1 with following exceptions:

- Table 6.5.1.7.4.1-1 is replaced by Table 16.5.1.14.4.1-1.
- Table 6.5.1.7.4.1-2 is replaced by Table 16.5.1.14.4.1-2.
- Table 6.5.1.7.4.1-3 is replaced by Table 16.5.1.14.4.1-3.

Table 16.5.1.14.4.1-1: Supported test configurations

Configuration	Description
16.5.1.14-1	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, FDD duplex mode
16.5.1.14-2	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, TDD duplex mode
16.5.1.14-3	30 kHz SSB SCS, 30 kHz data SCS, 20 MHz bandwidth, TDD duplex mode
16.5.1.14-4	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.14.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.14.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.5.1.14.4.1-3: General test parameters

Parameter	Unit	Value

			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration			DLBWP.0.1
DL dedicated BWP configuration			DLBWP.1.1
UL initial BWP configuration			ULBWP.0.1
UL dedicated BWP configuration			ULBWP.1.1
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1,4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
SSB index assigned as BFD-RS			0
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.14.4.2 Test procedure

Same as the test procedure given in clause 6.5.1.7.4.2.

16.5.1.14.4.3 Message contents

Same as the message contents given in clause 6.5.1.7.4.3.

16.5.1.14.5 Test requirement

Same as the test requirements given in clause 6.5.1.7.5 with following exceptions:

- Table 6.5.1.7.5-1 is replaced by Table 16.5.1.14.5-1.

Table 16.5.1.14.5-1: Cell specific test parameters

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			
EPRE ratio of OCNG DMRS to SSS	dB			
EPRE ratio of OCNG to OCNG DMRS	dB			
SNR on RLM-RS Config 1,2,3,4	dB	1.8	-6.2	-15.8
N_{oc}	dBm/15KHz	-98		
Propagation condition		TDL-C 300ns 100Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.1.7.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.

16.5.1.15 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE

16.5.1.15.1 Test purpose

To verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in 38.133 [6] clause 8.1B.3.

16.5.1.15.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards supporting CSI-RS based RLM and long DRX cycle.

16.5.1.15.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.15.

16.5.1.15.4 Test description

Same as the test description given in clause 6.5.1.8.4.

16.5.1.15.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.8.4.1 with following exceptions:

- Table 6.5.1.8.4.1-1 is replaced by Table 16.5.1.15.4.1-1.
- Table 6.5.1.8.4.1-2 is replaced by Table 16.5.1.15.4.1-2.
- Table 6.5.1.8.4.1-3 is replaced by Table 16.5.1.15.4.1-3.

Table 16.5.1.15.4.1-1: Supported test configurations

Configuration	Description
16.5.1.15-1	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, FDD duplex mode
16.5.1.15-2	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, TDD duplex mode
16.5.1.15-3	30 kHz SSB SCS, 30 kHz data SCS, 20 MHz bandwidth, TDD duplex mode
16.5.1.15-4	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.15.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.15.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.1.15.4.1-3: General test parameters

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration			DLBWP.0.1
DL dedicated BWP configuration			DLBWP.1.1
UL initial BWP configuration			ULBWP.0.1
UL dedicated BWP configuration			ULBWP.1.1
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.3.1 FDD
	Config 2		CCR.4.1 TDD
	Config 3		CCR.5.1 TDD
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1

PDSCH/PDCCH subcarrier spacing	Config 1,2,4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1,4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	2.44
T4		s	0.2
T5		s	1.88
T6		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

16.5.1.15.4.2 Test procedure

Same as the test procedure given in clause 6.5.1.8.4.2.

16.5.1.15.4.3 Message contents

Same as the message contents given in clause 6.5.1.8.4.3.

16.5.1.15.5 Test requirement

Same as the test requirements given in clause 6.5.1.8.5 with following exceptions:

- Table 6.5.1.8.5-1 is replaced by Table 16.5.1.15.5-1.

Table 16.5.1.15.5-1: Cell specific test parameters

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					
SNR on RLM-RS	dB	1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	dBm/15kHz	-98				
Propagation condition		TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 6.5.1.8.4-1.

16.5.1.16 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE

16.5.1.16.1 Test purpose

To verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in 38.133 [6] clause 8.1B.3.

16.5.1.16.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting CSI-RS based RLM and long DRX cycle.

16.5.1.16.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.1.0.1 and 16.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.1.16.

16.5.1.16.4 Test description

Same as the test description given in clause 6.5.1.8.4.

16.5.1.16.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.1.8.4.1 with following exceptions:

- Table 6.5.1.8.4.1-1 is replaced by Table 16.5.1.16.4.1-1.
- Table 6.5.1.8.4.1-2 is replaced by Table 16.5.1.16.4.1-2.
- Table 6.5.1.8.4.1-3 is replaced by Table 16.5.1.16.4.1-3.

Table 16.5.1.16.4.1-1: Supported test configurations

Configuration	Description
16.5.1.16-1	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, FDD duplex mode
16.5.1.16-2	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, TDD duplex mode
16.5.1.16-3	30 kHz SSB SCS, 30 kHz data SCS, 20 MHz bandwidth, TDD duplex mode
16.5.1.16-4	15 kHz SSB SCS, 15 kHz data SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.1.16.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.1.16.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.5.1.16.4.1-3: General test parameters

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration			DLBWP.0.1
DL dedicated BWP configuration			DLBWP.1.1
UL initial BWP configuration			ULBWP.0.1
UL dedicated BWP configuration			ULBWP.1.1
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1,4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
SSB index assigned as BFD-RS			0
TCI configuration for PDCCH/PDSCH			TCI.State.2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low

Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				DRX.3
Gap pattern ID				gp0
Layer 3 filtering				Enabled
T310 timer			ms	2000
T311 timer			ms	1000
N310				1
N311				1
CSI-RS configuration		Config 1,4		CSI-RS.1.1 FDD
		Config 2		CSI-RS.1.1 TDD
		Config 3		CSI-RS.2.1 TDD
T1			s	0.2
T2			s	0.2
T3			s	1.24
T4			s	0.2
T5			s	1.88
T6			s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

16.5.1.16.4.2 Test procedure

Same as the test procedure given in clause 6.5.1.8.4.2.

16.5.1.16.4.3 Message contents

Same as the message contents given in clause 6.5.1.8.4.3.

16.5.1.16.5 Test requirement

Same as the test requirements given in clause 6.5.1.8.5 with following exceptions:

- Table 6.5.1.8.5-1 is replaced by Table 16.5.1.16.5-1.

Table 16.5.1.16.5-1: Cell specific test parameters

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					

SNR on RLM-RS	dB	1.8	-6.2	-15.8	-5.3	1.8
N_{oc}	dBm/15kHz	-98				
Propagation condition		TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.						
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.						
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 6.5.1.8.4-1.						
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.						

16.5.2 Beam Failure Detection and Link recovery procedures for RedCap

16.5.2.0 Minimum requirements

16.5.2.0.1 General

The Redcap UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set $\overline{q}_0$ as specified in TS 38.213 [3] in order to detect beam failure on PCell in SA. The SSB and SMTC in this section applies for both CD-SSB and NCD-SSB if it is not additional specified.

The RS resource configurations in the set $\overline{q}_0$ on PCell can be periodic CSI-RS resources and/or SSBs. UE is not required to perform beam failure detection outside the active DL BWP. UE is not required to meet the requirements in 38.133 [6] clause 8.5B.2 and 8.5B.3 if UE does not have set $\overline{q}_0$.

On each RS resource configuration in the set $\overline{q}_0$, the UE shall estimate the radio link quality and compare it to the threshold $Q_{out_LR_Redcap}$ for the purpose of accessing downlink radio link quality of the serving cell beams.

The threshold $Q_{out_LR_Redcap}$ is defined as the level at which the downlink radio level link of a given resource configuration on set $\overline{q}_0$ cannot be reliably received and shall correspond to the $BLER_{out}$ = 10% block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{out_LR_SSB}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 16.5.2.0.1-1. For CSI-RS based beam failure detection, $Q_{out_LR_CSI\text{-}RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 16.5.2.0.1-2.

Table 16.5.2.0.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16 for 1 Rx UE; 8 for 2 Rx UE
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	48 for 1 Rx UE; 24 for 2 Rx UE
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Note 1 : Note: SCS=60kHz is not applicable for FR1

Table 16.5.2.0.1-2: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16 for 1 Rx UE; 8 for 2 Rx UE
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48 for 1 Rx UE; 24 for 2 Rx UE
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note 1 : Note: SCS=60kHz is not applicable for FR1	

Upon request the UE shall deliver configuration indexes from the set $\bar{q}$ as specified in TS 38.213 [3] to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold $Q_{in_LR_RedCap}$, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the $Q_{in_LR_RedCap}$ threshold to the L1-RSRP measurement obtained from an SSB. The UE applies the $Q_{in_LR_RedCap}$ threshold to the L1-RSRP measurement obtained for a CSI-RS resource after scaling a respective CSI-RS reception power with a value provided by higher layer parameter *powerControlOffsetSS*. The RS resource configurations in the set $\bar{q}$ can be periodic CSI-RS resources or SSBs or both SSB and CSI-RS resources. UE is not required to perform candidate beam detection outside the active DL BWP.

When the radio link quality on all the RS resources in set $\bar{q}_0$ is worse than $Q_{out_LR_Redcap}$, layer 1 of the UE shall send a beam failure instance indication to the higher layers

The beam failure instance evaluation for the RS resources in set $\bar{q}_0$ shall be performed as specified in TS 38.213 [3] clause 6. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval_BFD_Redcap}$.

When DRX is not used, $T_{Indication_interval_BFD_Redcap}$ is max(2ms, $T_{SSB\text{-}RS,M}$)) or max(2ms, $T_{CSI\text{-}RS,M}$), where $T_{SSB\text{-}RS,M}$ and $T_{CSI\text{-}RS,M}$ is the shortest periodicity of all RS resources in set $\bar{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\bar{q}_0$ or CSI-RS resource in the set $\bar{q}_0$.

When DRX is used, for SSB based link quality measurement,

- $T_{Indication_interval_BFD_Redcap}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{SSB\text{-}RS,M}$), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD_Redcap}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{Indication_interval_BFD_Redcap}$ = Max(1.5 × DRX_cycle_length, 1.5 × $T_{CSI\text{-}RS,M}$), if DRX_cycle_length ≤ 320ms,
- $T_{Indication_interval_BFD_Redcap}$ = DRX_cycle_length, if DRX_cycle_length > 320ms.

For HD-FDD UE, the above conditions and requirements $T_{Indication_interval_BFD_Redcap}$ apply given that for each BFD-RS configuration, at least one BFD-RS sample must fall with DL occasion within an indication period.

There are no scheduling restrictions due to beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to beam failure detection when SSB is configured as BFD. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to beam failure detection when SSB is configured as BFD.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for beam failure detection.

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as link recovery detection resource. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured as link recovery detection resource.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, TRS, CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for L1-RSRP.

When the UE transitions between BFD CD-SSB resource and BFD NCD-SSB resource during one evaluation period, the UE is allowed to restart the ongoing evaluation using the second SSB type after BWP switching. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second SSB type for each BFD-RS resource.

The requirements in 38.133 [6] clause 8.5.10 shall also apply except the scenarios described above.

The normative reference for this requirement is TS 38.133 [6] clauses 8.5B.1, 8.5B.2, 8.5B.3, 8.5B.4, 8.5B.6, 8.5B.8 and 8.5B.9.

16.5.2.0.2 Minimum conformance requirements for SSB-based BFD and CBD

The requirements in this clause apply for each SSB resource in the set $\overline{q}_0$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in Table 16.5.2.0.2-1.

The requirements in this clause apply for each SSB resource in the set $\overline{q}_1$ configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in Table 16.5.2.0.2-2.

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_SSB_Redcap}$ ms period becomes worse than the threshold $Q_{out_LR_SSB}$ within $T_{Evaluate_BFD_SSB_Redcap}$ ms period.

The value of $T_{Evaluate_BFD_SSB_Redcap}$ is defined in Table 16.5.2.0.2-1 for FR1.

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB.
- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

where,

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For an FR1 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 16.5.2.0.2-1: Evaluation period $T_{Evaluate_BFD_SSB_Redcap}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB_Redcap}$ (ms) for Redcap UE with 2 Rx	$T_{Evaluate_BFD_SSB_Redcap}$ (ms) for 1 Rx Redcap
no DRX	Max(50, Ceil(5 × P) × T_{SSB})	[Max(50, Ceil(10 × P) × T_{SSB})]
DRX cycle ≤ 320ms	Max(50, Ceil(7.5 × P) × Max(T_{DRX},T_{SSB}))	[Max(50, Ceil(15 × P) × Max(T_{DRX},T_{SSB}))]
DRX cycle > 320ms	Ceil(5 × P) × T_{DRX}	[Ceil(10 × P) × T_{DRX}]
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.		

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
  - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

The UE shall monitor the configured SSB resources using the evaluation period in Table 16.5.2.0.2-2 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_SSB_Redcap}$ is defined in Table 16.5.2.0.2-2 for FR1.

where,

For FR1,

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB,
- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

where,

If the high layer in TS 38.331 [2] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For an FR1 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of P_{CBD} used in Table 16.5.2.0.2-2 are defined as

For each SSB resource in the set $\bar{q}_1$ configured for PCell

- P_{CBD} = 1.

Table 16.5.2.0.2-2: Evaluation period $T_{Evaluate_CBD_SSB_Redcap}$ for FR1

Configuration	$T_{Evaluate_CBD_SSB_Redcap}$ (ms)
non-DRX, DRX cycle ≤ 320ms	Max(25, Ceil(3 × P × P_{CBD}) × T_{SSB})
DRX cycle > 320ms	Ceil(3 × P × P_{CBD}) × T_{DRX}
Note: T_{SSB} is the periodicity of SSB in the set $\overline{q}_1$. T_{DRX} is the DRX cycle length.	

The normative reference for this requirement is TS 38.133 [6] clauses 8.5B.2 and 8.5B.5.

16.5.2.0.3 Minimum conformance requirements for CSI-RS based RLM

The requirements in this clause apply for each CSI-RS resource in the set $\overline{q}_0$ of resource configurations for a serving cell, provided that the CSI-RS resource(s) in set $\overline{q}_0$ for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in Table 16.5.2.0.3-1.

The requirements in this clause apply for each CSI-RS resource in the set $\overline{q}_1$ configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in Table 16.5.2.0.3-2.

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\overline{q}_0$ estimated over the last $T_{Evaluate_BFD_CSI-RS_Redcap}$ ms period becomes worse than the threshold $Q_{out_LR_CSI-RS}$ within $T_{Evaluate_BFD_CSI-RS_Redcap}$ ms period.

The value of $T_{Evaluate_BFD_CSI-RS_Redcap}$ is defined in Table 16.5.2.0.3-1 for FR1.

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS.
- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

where,

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Note: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For an FR1 serving cell, longer BFD evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{BFD} used in Table 16.5.2.0.3-1 are defined as

- M_{BFD} = 10, if the CSI-RS resource(s) in set $\overline{q}_0$ used for BFD is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{BFD} used in Table 16.5.2.0.3-1 are defined as

For each CSI-RS resource in the set $\overline{q}_0$ configured for PCell

- P_{BFD} = 1.

Table 16.5.2.0.3-1: Evaluation period $T_{Evaluate_BFD_CSI-RS_Redcap}$ for FR1

Configuration	$T_{Evaluate_BFD_CSI-RS_Redcap}$ (ms) for Redcap UE with 2 Rx	$T_{Evaluate_BFD_CSI-RS_Redcap}$ (ms) for 1 Rx Redcap
no DRX	Max(50, Ceil($M_{BFD} \times P \times P_{BFD}$) × T_{CSI-RS})	Max(50, Ceil(2×$M_{BFD} \times P \times P_{BFD}$) × T_{CSI-RS})
DRX cycle ≤ 320ms	Max(50, Ceil(1.5 × $M_{BFD} \times P \times P_{BFD}$) × Max($T_{DRX}$, T_{CSI-RS}))	Max(50, Ceil(2×1.5 × $M_{BFD} \times P \times P_{BFD}$) × Max($T_{DRX}$, T_{CSI-RS}))
DRX cycle > 320ms	Ceil($M_{BFD} \times P \times P_{BFD}$) × T_{DRX}	Ceil(2×$M_{BFD} \times P \times P_{BFD}$) × T_{DRX}
Note: T_{CSI-RS} is the periodicity of CSI-RS resource in the set $\overline{q}_0$. T_{DRX} is the DRX cycle length.		

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following scenarios.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in set $\overline{q}_1$ estimated over the last $T_{Evaluate_CBD_CSI-RS_Redcap}$ [ms] period becomes better than the threshold $Q_{in_LR_RedCap}$ within $T_{Evaluate_CBD_CSI-RS_Redcap}$ [ms] period provided CSI-RS Ês/Iot is according to 38.133 [6] Annex Table B.2.4.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in Table 16.5.2.0.3-2 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320ms.

The value of $T_{Evaluate_CBD_CSI-RS_Redcap}$ is defined in Table 16.5.2.0.3-2 for FR1.

For FR1,

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

where,

If the high layer in TS 38.331 [2] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet pervious conditions.

Longer evaluation period would be expected if the CSI-RS is on the same OFDM symbols with RLM, BFD, BM-RS, or other CBD-RS, according to the measurement restrictions defined in clause 8.5.6.3.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For an FR1 serving cell, longer CBD evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{CBD} used in Table 16.5.2.0.3-2 are defined as

- M_{CBD} = 3, if the CSI-RS resource configured in the set $\bar{q}_1$ is transmitted with Density = 3 and over the bandwidth $\geqslant$ 24 PRBs.

The values of P_{CBD} used in Table 16.5.2.0.3-2 are defined as

For each CSI-RS resource in the set $\bar{q}_1$ configured for PCell

- P_{CBD} = 1.

Table 16.5.2.0.3-2: Evaluation period $T_{Evaluate_CBD_CSI\text{-}RS_Redcap}$ for FR1

Configuration	$T_{EvaluateC_CBD_CSI\text{-}RS_Redcap}$ (ms)
non-DRX, DRX cycle ≤ 320ms	Max(25, Ceil($M_{CBD} \times P \times P_{CBD}$) × $T_{CSI\text{-}RS}$)
DRX cycle > 320ms	Ceil($M_{CBD} \times P \times P_{CBD}$) × T_{DRX}
Note: $T_{CSI\text{-}RS}$ is the periodicity of CSI-RS resource in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

The normative reference for this requirement is TS 38.133 [6] clauses 8.5B.3 and 8.5B.6.

16.5.2.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 1 Rx UE

16.5.2.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in 38.133 [6] clause 8.5B.

16.5.2.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from release 17 onwards and supporting link recovery.

16.5.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.2.0.1 and 16.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.2.1.

16.5.2.1.4 Test description

Same as the test description given in clause 6.5.5.1.4.

16.5.2.1.4.1 Initial conditions

Same as the initial conditions 6.5.5.1.4.1 with following exceptions:

- Table 6.5.5.1.4.1-1 is replaced by Table 16.5.2.1.4.1-1.
- Table 6.5.5.1.4.1-2 is replaced by Table 16.5.2.1.4.1-2.
- Table 6.5.5.1.4.1-3 is replaced by Table 16.5.2.1.4.1-3.

Table 16.5.2.1.4.1-1: Supported test configurations

Configuration	Description
16.5.2.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.2.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.2.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.2.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.2.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
BWchannel	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52	
	Config 3		20: $N_{RB,c}$ = 51	
DL initial BWP configuration	Config 1,2,3,4		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2,3,4		DLBWP.1.1	
UL initial BWP configuration	Config 1,2,3,4		ULBWP.0.1	
UL dedicated BWP configuration	Config 1,2,3,4		ULBWP.1.1	
TDD Configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
SSB Configuration	Config 1,4		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
SMTC Configuration	Config 1,2,4		SMTC.1 RedCap	
	Config 3		SMTC.1 RedCap	
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	

	Config 3		30 KHz	
PRACH Configuration	Config 1,2,3,4		PRACH.2 FR1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x1 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	16	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1,2,4	dBm/ SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 Timer	ms		1000	
N310			2	
T1		s	0.2	During this time the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.44	
T4		s	0	
T5		s	0.17	
D1		s	0.14	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

16.5.2.1.4.2 Test procedure

Same as the test procedure given in clause 6.5.5.1.4.2.

16.5.2.1.4.3 Message contents

Same as the message contents given in clause 6.5.5.1.4.3 with following exceptions:

- Table 7.3.1-3 in TS 38.508-1 [14] is used with condition SMTC.1 RedCap.

Table 16.5.2.1.4.3-1: PDCCH *Search Space* for BFR

Derivation Path: Table 6.5.5.1.4.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel8	n0		
aggregationLevel16	n1	AL16	
}			
}			

Table 16.5.2.1.4.3-2: ControlResourceSet for BFR

Derivation Path: Table 6.5.5.1.4.3-6			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 48 RBs of the BWP	
}			

16.5.2.1.5 Test requirement

Same as the test requirements given in clause 6.5.5.1.5 with following exceptions:

- Table 6.5.5.1.5-1 is replaced by Table 16.5.2.1.5-1.

Table 16.5.2.1.5-1: NR Cell specific test parameters (Cell 1)

Parameter		**Unit**	**Test 1**				
			T1	**T2**	**T3**	**T4**	**T5**
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1,2,4	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 3		5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q_1	Config 1,2,4	dB	-13.25	-13.25	13.25	13.25	13.25
	Config 3		-13.25	-13.25	13.25	13.25	13.25
SSB_RP of set q_1	Config 1,2,4	dBm/SCS	-111.25	-111.25	-84.75	-84.75	-84.75
	Config 3		-108.25	-108.25	-81.75	-81.75	-81.75
N_{oc}	Config 1,2,3,4	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.1.4-1.

16.5.2.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE

16.5.2.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in 38.133 [6] clause 8.5B.

16.5.2.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from release 17 onwards and supporting link recovery.

16.5.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.2.0.1 and 16.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.2.2.

16.5.2.2.4 Test description

Same as the test description given in clause 6.5.5.1.4.

16.5.2.2.4.1 Initial conditions

Same as the initial conditions 6.5.5.1.4.1 with following exceptions:

- Table 6.5.5.1.4.1-1 is replaced by Table 16.5.2.2.4.1-1.
- Table 6.5.5.1.4.1-2 is replaced by Table 16.5.2.2.4.1-2.
- Table 6.5.5.1.4.1-3 is replaced by Table 16.5.2.2.4.1-3.

Table 16.5.2.2.4.1-1: Supported test configurations

Configuration	Description
16.5.2.2-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.2.2-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.2.2-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.2.2-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.2.2.4.1-2: Initial conditions

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

Table 16.5.2.2.4.1-3: General test parameters

Parameter			Unit	Value	Comment
				Test 1	
Active PCell				Cell 1	
RF Channel Number				1	
Duplex mode		Config 1		FDD	
		Config 2,3		TDD	
		Config 4		HD-FDD	
BWchannel		Config 1,2,4	MHz	10: $N_{RB,c}$ = 52	
		Config 3		20: $N_{RB,c}$ = 51	
DL initial BWP configuration		Config 1,2,3,4		DLBWP.0.1	
DL dedicated BWP configuration		Config 1,2,3,4		DLBWP.1.1	
UL initial BWP configuration		Config 1,2,3,4		ULBWP.0.1	
UL dedicated BWP configuration		Config 1,2,3,4		ULBWP.1.1	
TDD Configuration		Config 1,4		Not Applicable	
		Config 2		TDDConf.1.1	
		Config 3		TDDConf.2.1	
CORESET Reference Channel		Config 1,4		CR.1.1 FDD	
		Config 2		CR.1.1 TDD	
		Config 3		CR.2.1 TDD	
SSB Configuration		Config 1,4		SSB.3 FR1	
		Config 2		SSB.3 FR1	
		Config 3		SSB.2 RedCap FR1	
SMTC Configuration		Config 1,2,4		SMTC.1 RedCap	
		Config 3		SMTC.1 RedCap	
PDSCH/PDCCH subcarrier spacing		Config 1,2,4		15 KHz	
		Config 3		30 KHz	
PRACH Configuration		Config 1,2,3,4		PRACH.2 FR1	
SSB Index assigned as BFD RS (q_0)				0	
SSB Index assigned as CBD RS (q_1)				1	
OCNG parameters				OP.1	
CP length				Normal	
Correlation Matrix and Antenna Configuration				2x2 Low	
Beam failure detection transmission parameters	DCI format			1-0	
	Number of Control OFDM symbols			2	
	Aggregation level		CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0	
	DMRS precoder granularity			REG bundle size	
	REG bundle size			6	
DRX				OFF	
Gap pattern ID				gp0	

gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1,2,4	dBm/ SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 Timer	ms		1000	
N310			2	
T1		s	0.2	During this time the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.14	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

16.5.2.2.4.2 Test procedure

Same as the test procedure given in clause 6.5.5.1.4.2.

16.5.2.2.4.3 Message contents

Same as the message contents given in clause 6.5.5.1.4.3 with following exceptions:

- Table 7.3.1-3 in TS 38.508-1 [14] is used with condition SMTC.1 RedCap.

16.5.2.2.5 Test requirement

Same as the test requirements given in clause 6.5.5.1.5 with following exceptions:

- Table 6.5.5.1.5-1 is replaced by Table 16.5.2.2.5-1.

Table 16.5.2.2.5-1: NR Cell specific test parameters (Cell 1)

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					

SNR_SSB of set q_0	Config 1,2,4	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 3		5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q_1	Config 1,2,4	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 3		-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_1	Config 1,2,4	dBm/ SCS	-108.2	-108.2	-88.2	-88.2	-88.2
	Config 3		-105.2	-105.2	-85.2	-85.2	-85.2
N_{oc}	Config 1,2,3,4	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.1.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.

16.5.2.3 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 1 Rx UE

16.5.2.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5B.2.

16.5.2.3.2 Test applicability

This test applies to all types of NR RedCap UE with 1 RX from Release 17 onwards supporting link recovery and long DRX cycle.

16.5.2.3.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.2.0.1 and 16.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.2.3.

16.5.2.3.4 Test description

Same as the test description given in clause 6.5.5.2.4.

16.5.2.3.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.5.2.4.1 with following exceptions:

- Table 6.5.5.2.4.1-1 is replaced by Table 16.5.2.3.4.1-1.
- Table 6.5.5.2.4.1-2 is replaced by Table 16.5.2.3.4.1-2.
- Table 6.5.5.2.4.1-3 is replaced by Table 16.5.2.3.4.1-3.

Table 16.5.2.3.4.1-1: Supported test configurations for NR SA FR1 SSB-based beam failure detection and link recovery in DRX mode for 1 Rx UE

Configuration	Description

16.5.2.3-1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
16.5.2.3-2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
16.5.2.3-3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
16.5.2.3-4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.2.3.4.1-2: Initial conditions for NR SA FR1 SSB-based beam failure detection and link recovery in DRX mode for 1 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1and and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.2.3.4.1-3: General test parameters for NR SA FR1 SSB-based beam failure detection and link recovery in DRX mode for 1 Rx UE

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
BWchannel	Config 1,2,4	MHz	10: NRB,c = 52	
	Config 3		20: NRB,c = 51	
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1	
TDD Configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	

SSB Configuration	Config 1,2,4		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
SMTC Configuration	Config 1, 2,3,4		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	15	
	Config 3		30	
PRACH Configuration	Config 1, 2, 3, 4		PRACH.1	Table A.7-1
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x1 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	16	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.5
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			Absent	When the field is absent, the UE applies the value 0. (38.133 [6] Table 8.1.1-1).
Rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	

beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

16.5.2.3.4.2 Test Procedure

Same as the test procedure given in clause 6.5.5.2.4.2.

16.5.2.3.4.3 Message Contents

Same as the message contents given in clause 6.5.5.2.4.3 with following exceptions:

Table 16.5.2.3.4.3-1: PDCCH *Search Space* for BFR

Derivation Path: Table 6.5.5.2.4.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel8	n0		
aggregationLevel16	n1	AL16	
}			
}			

Table 16.5.2.3.4.3-2: ControlResourceSet for BFR

Derivation Path: Table 6.5.5.2.4.3-6			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			

frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 48 RBs of the BWP	
}			

16.5.2.3.5 Test Requirement

Same as the test requirements given in clause 6.5.5.2.5 with following exceptions:

- Table 6.5.5.2.5-1 is replaced by Table 16.5.2.3.5-1.

Table 16.5.2.3.5-1: Cell specific test parameters for NR SA FR1 SSB-based beam failure detection and link recovery in DRX mode for 1 Rx UE

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0		dB	5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q_1		dB	-13.25	-13.25	13.25	13.25	13.25
SSB_RP of set q_1	Config 1,2,4	dBm/ SCS	-111.25	-111.25	-84.75	-84.75	-84.75
	Config 3		-108.25	-108.25	-81.75	-81.75	-81.75
N_{oc}		dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting is assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS Res.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.1.4-1.

16.5.2.4 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE

16.5.2.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in TS 38.133 [6] clause 8.5B.2.

16.5.2.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2 RX from Release 17 onwards supporting link recovery and long DRX cycle.

16.5.2.4.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.2.0.1 and 16.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.2.4.

16.5.2.4.4 Test description

Same as the test description given in clause 6.5.5.2.4.

16.5.2.4.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.5.2.4.1 with following exceptions:

- Table 6.5.5.2.4.1-1 is replaced by Table 16.5.2.4.4.1-1.
- Table 6.5.5.2.4.1-2 is replaced by Table 16.5.2.4.4.1-2.
- Table 6.5.5.2.4.1-3 is replaced by Table 16.5.2.4.4.1-3.

Table 16.5.2.4.4.1-1: Supported test configurations for NR SA FR1 SSB-based beam failure detection and link recovery in DRX mode for 2 Rx UE

Configuration	Description
16.5.2.4-1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
16.5.2.4-2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
16.5.2.4-3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
16.5.2.4-4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.5.2.4.4.1-2: Initial conditions for NR SA FR1 SSB-based beam failure detection and link recovery in DRX mode for 2 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.5.2.4.4.1-3: General test parameters for NR SA FR1 SSB-based beam failure detection and link recovery in DRX mode for 2 Rx UE

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
Bwchannel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		20: NRB,c = 51	
	Config 4		10: NRB,c = 52	
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1	

DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
	Config 3		SMTC.1	
	Config 4		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
	Config 4		15 KHz	
PRACH Configuration	Config 1, 2		PRACH.2 FR1	Table A.7.1-1
	Config 3		PRACH.2 FR1	Table A.7.1-1
	Config 4		PRACH.2 FR1	Table A.7.1-1
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.5
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			Absent	When the field is

				absent, the UE applies the value 0. (38.133 [6] Table 8.1.1-1).
Rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
	Config 4		-98	
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [12]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [12]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
	Config 4		CSI-RS.1.1 FDD	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
	Config 4		TRS.1.1 FDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	3.24	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

16.5.2.4.4.2 Test Procedure

Same as the test procedure given in clause 6.5.5.2.4.2.

16.5.2.4.4.3 Message Contents

Same as the message contents given in clause 6.5.5.2.4.3.

16.5.2.4.5 Test Requirement

Same as the test requirements given in clause 6.5.5.2.5 with following exceptions:

- Table 6.5.5.2.5-1 is replaced by Table 16.5.2.4.5-1.

Table 16.5.2.4.5-1: Cell specific test parameters for NR SA FR1 SSB-based beam failure detection and link recovery in DRX mode for 2 Rx UE

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5

EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5.8	-2.2	-12.8	-12.8	-12.8
	Config 2		5.8	-2.2	-12.8	-12.8	-12.8
	Config 3		5.8	-2.2	-12.8	-12.8	-12.8
	Config 4		5.8	-2.2	-12.8	-12.8	-12.8
SNR_SSB of set q_1	Config 1	dB	-10.2	-10.2	10.2	10.2	10.2
	Config 2		-10.2	-10.2	10.2	10.2	10.2
	Config 3		-10.2	-10.2	10.2	10.2	10.2
	Config 4		-10.2	-10.2	10.2	10.2	10.2
SSB_RP of set q_1	Config 1	dBm/SCS kHz	-108.2	-108.2	−87.8	−87.8	−87.8
	Config 2		-108.2	-108.2	−87.8	−87.8	−87.8
	Config 3		-105.2	-105.2	−84.8	−84.8	−84.8
	Config 4		-108.2	-108.2	−87.8	−87.8	−87.8
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting is assigned to the UE prior to the start of time period T1.
Note 4: Void
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS Res.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.2.4-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.

16.5.2.5 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 1 Rx UE

16.5.2.5.1 Test purpose

To verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in 38.133 [6] clause 8.5B.3.

16.5.2.5.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards supporting CSI-RS based RLM and link recovery.

16.5.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.2.0.1 and 16.5.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.2.5.

16.5.2.5.4 Test description

Same as the test description given in clause 6.5.5.3.4.

16.5.2.5.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.5.3.4.1 with following exceptions:

- Table 6.5.5.3.4.1-1 is replaced by Table 16.5.2.5.4.1-1.
- Table 6.5.5.3.4.1-2 is replaced by Table 16.5.2.5.4.1-2.
- Table 6.5.5.3.4.1-3 is replaced by Table 16.5.2.5.4.1-3.

Table 16.5.2.5.4.1-1: Supported test configurations

Configuration	Description
16.5.2.5-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.2.5-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.2.5-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.2.5-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.2.5.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.2.5.4.1-3: General test parameters

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
SSB Configuration	Config 1,2,4		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
SMTC Configuration			SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		15 KHz	
	Config 3		30 KHz	
PRACH Configuration			PRACH.4 FR1	

csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x1 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	16	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB	Config 1,2,4	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], section 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], section 5.17
CSI-RS configuration for q_0 and q_1	Config 1,4		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS	Config 1,4		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.27	
T4		s	0	
T5		s	0.08	
D1		s	0.05	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

16.5.2.5.4.2 Test procedure

Same as the test procedure given in clause 6.5.5.3.4.2.

16.5.2.5.4.3 Message contents

Same as the message contents given in clause 6.5.5.3.4.3 with following exceptions:

Table 16.5.2.5.4.3-1: PDCCH *Search Space* for BFR

Derivation Path: Table 6.5.5.3.4.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel8	n0		
aggregationLevel16	n1	AL16	
}			
}			

Table 16.5.2.5.4.3-2: ControlResourceSet for BFR

Derivation Path: Table 6.5.5.3.4.3-7			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 48 RBs of the BWP	
}			

16.5.2.5.5 Test requirement

Same as the test requirements given in clause 6.5.5.3.5 with following exceptions:

- Table 6.5.5.3.5-1 is replaced by Table 16.5.2.5.5-1.

Table 16.5.2.5.5-1: Cell specific test parameters

Parameter		**Unit**	**Test 1**				
			T1	**T2**	**T3**	**T4**	**T5**
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0		dB	5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set q_1		dB	-13.25	-13.25	13.25	13.25	13.25
CSI-RS_RP of set q_1	Config 1,2,4	-111.25	-111.25	-84.75	-84.75	-84.75	-87.8
	Config 3	-108.25	-108.25	-81.75	-81.75	-81.75	-84.8
N_{oc}		dBm/ 15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 5: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 6: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 7: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.3.4-1.

16.5.2.6 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE

16.5.2.6.1 Test purpose

To verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in 38.133 [6] clause 8.5B.3.

16.5.2.6.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting CSI-RS based RLM and link recovery.

16.5.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.2.0.1 and 16.5.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.2.6.

16.5.2.6.4 Test description

Same as the test description given in clause 6.5.5.3.4.

16.5.2.6.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.5.3.4.1 with following exceptions:

- Table 6.5.5.3.4.1-1 is replaced by Table 16.5.2.6.4.1-1.
- Table 6.5.5.3.4.1-2 is replaced by Table 16.5.2.6.4.1-2.
- Table 6.5.5.3.4.1-3 is replaced by Table 16.5.2.6.4.1-3.

Table 16.5.2.6.4.1-1: Supported test configurations

Configuration	Description
16.5.2.6-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.2.6-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.2.6-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.2.6-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.2.6.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2 with n=1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.5.2.6.4.1-3: General test parameters

Parameter			Unit	Value	Comment
				Test 1	
Active PCell				Cell 1	
RF Channel Number				1	
Duplex mode		Config 1		FDD	
		Config 2,3		TDD	
		Config 4		HD-FDD	
TDD Configuration		Config 1,4		Not Applicable	
		Config 2		TDDConf.1.1	
		Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD	
		Config 2		CR.1.1 TDD	
		Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD	
		Config 2		CCR.1.1 TDD	
		Config 3		CCR.2.1 TDD	
SSB Configuration		Config 1,2,4		SSB.3 FR1	
		Config 3		SSB.2 RedCap FR1	
SMTC Configuration				SMTC.1	
PDSCH/PDCCH subcarrier spacing		Config 1,2,4		15 KHz	
		Config 3		30 KHz	
PRACH Configuration				PRACH.4 FR1	
csi-RS-Index assigned as beam failure detection RS in set q_0				0	
OCNG parameters				OP.1	
CP length				Normal	
Correlation Matrix and Antenna Configuration				2x2 Low	
Beam failure detection transmission parameters	DCI format			1-0	
	Number of Control OFDM symbols			2	
	Aggregation level		CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0	
	DMRS precoder granularity			REG bundle size	
	REG bundle size			6	
DRX				OFF	
Gap pattern ID				N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1				1	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB		Config 1,2,4	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
		Config 3	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see TS 38.321 [12], section 5.17
beamFailureDetectionTimer				pbfd4	see TS 38.321 [12], section 5.17
CSI-RS configuration for q_0 and q_1		Config 1,4		CSI-RS.1.2 FDD	
		Config 2		CSI-RS.1.2 TDD	
		Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting		Config 1,4		CSI-RS.1.1 FDD	
		Config 2		CSI-RS.1.1 TDD	
		Config 3		CSI-RS.2.1 TDD	
TRS configuration		Config 1,4		TRS.1.1 FDD	

	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS	Config 1,4		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.08	
D1		s	0.05	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

16.5.2.6.4.2 Test procedure

Same as the test procedure given in clause 6.5.5.3.4.2.

16.5.2.6.4.3 Message contents

Same as the message contents given in clause 6.5.5.3.4.3.

16.5.2.6.5 Test requirement

Same as the test requirements given in clause 6.5.5.3.5 with following exceptions:

- Table 6.5.5.3.5-1 is replaced by Table 16.5.2.6.5-1.

Table 16.5.2.6.5-1: Cell specific test parameters

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0		dB	5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set q_1		dB	-10.2	-10.2	10.2	10.2	10.2
CSI-RS_RP of set q_1	Config 1,2,4	dBm/ SCS	-108.2	-108.2	-87.8	-87.8	-87.8
	Config 3		-105.2	-105.2	-84.8	-84.8	-84.8
N_{oc}		dBm/ 15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 5:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 6:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 7:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.3.4-1.
Note 8:	The SNR values are specified for testing a UE which supports 2RX on at least one band.

16.5.2.7 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 1 Rx UE

16.5.2.7.1 Test purpose

To verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in 38.133 [6] clause 8.5B.3.

16.5.2.7.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards supporting CSI-RS based RLM, long DRX cycle and link recovery.

16.5.2.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.2.0.1 and 16.5.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.2.7.

16.5.2.7.4 Test description

Same as the test description given in clause 6.5.5.4.4.

16.5.2.7.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.5.4.4.1 with following exceptions:

- Table 6.5.5.4.4.1-1 is replaced by Table 16.5.2.7.4.1-1.
- Table 6.5.5.4.4.1-2 is replaced by Table 16.5.2.7.4.1-2.
- Table 6.5.5.4.4.1-3 is replaced by Table 16.5.2.7.4.1-3.

Table 16.5.2.7.4.1-1: Supported test configurations

Configuration	Description
16.5.2.7-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.2.7-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.2.7-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.2.7-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.2.7.4.1-2: Initial conditions

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.2.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.2.7.4.1-3: General test parameters

Parameter			Unit	Value	Comment
				Test 1	
Active PCell				Cell 1	
RF Channel Number				1	
Duplex mode		Config 1		FDD	
		Config 2,3		TDD	
		Config 4		HD-FDD	
TDD Configuration		Config 1,4		Not Applicable	
		Config 2		TDDConf.1.1	
		Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel		Config 1,4		CR.1.1 FDD	
		Config 2		CR.1.1 TDD	
		Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4		CCR.1.1 FDD	
		Config 2		CCR.1.1 TDD	
		Config 3		CCR.2.1 TDD	
SSB Configuration		Config 1,2,4		SSB.3 FR1	
		Config 3		SSB.2 RedCap FR1	
SMTC Configuration				SMTC.1	
PDSCH/PDCCH subcarrier spacing		Config 1,2,4		15 KHz	
		Config 3		30 KHz	
PRACH Configuration				PRACH.4 FR1	
csi-RS-Index assigned as beam failure detection RS in set q_0				0	
OCNG parameters				OP.1	
CP length				Normal	
Correlation Matrix and Antenna Configuration				2x1 Low	
Beam failure detection transmission parameters	DCI format			1-0	
	Number of Control OFDM symbols			2	
	Aggregation level		CCE	16	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy		dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy		dB	0	
	DMRS precoder granularity			REG bundle size	
	REG bundle size			6	
DRX				DRX.7	
Gap pattern ID				N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1				1	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB		Config 1,2,4	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
		Config 3	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$

powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], section 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], section 5.17
CSI-RS configuration for q_0 and q_1	Config 1,4		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS	Config 1,4		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	12.24	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

16.5.2.7.4.2 Test procedure

Same as the test procedure given in clause 6.5.5.4.4.2.

16.5.2.7.4.3 Message contents

Same as the message contents given in clause 6.5.5.4.4.3 with following exceptions:

Table 16.5.2.7.4.3-1: PDCCH *Search Space* for BFR

Derivation Path: Table 6.5.5.4.4.3-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SearchSpace ::= SEQUENCE {			
nrofCandidates SEQUENCE {			
aggregationLevel8	n0		
aggregationLevel16	n1	AL16	
}			
}			

Table 16.5.2.7.4.3-2: ControlResourceSet for BFR

Derivation Path: Table 6.5.5.4.4.3-7			
Information Element	**Value/remark**	**Comment**	**Condition**
ControlResourceSet ::= SEQUENCE {			
frequencyDomainResources	11111111 00000000 00000000 00000000 00000000 00000	CORESET to use the least significant 48 RBs of the BWP	
}			

16.5.2.7.5 Test requirement

Same as the test requirements given in clause 6.5.5.4.5 with following exceptions:

- Table 6.5.5.4.5-1 is replaced by Table 16.5.2.7.5-1.

Table 16.5.2.7.5-1: Cell specific test parameters

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0		dB	5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set q_1		dB	-13.25	-13.25	13.25	13.25	13.25
CSI-RS_RP of set q_1	Config 1,2,4	-111.25	-111.25	-84.75	-84.75	-84.75	-87.8
	Config 3	-108.25	-108.25	-81.75	-81.75	-81.75	-84.8
N_{oc}		dBm/ 15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 5: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 6: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 7: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.4.4-1.

16.5.2.8 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE

16.5.2.8.1 Test purpose

To verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in 38.133 [6] clause 8.5B.3.

16.5.2.8.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting CSI-RS based RLM, long DRX cycle and link recovery.

16.5.2.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.2.0.1 and 16.5.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.2.8.

16.5.2.8.4 Test description

Same as the test description given in clause 6.5.5.4.4.

16.5.2.8.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.5.4.4.1 with following exceptions:

- Table 6.5.5.4.4.1-1 is replaced by Table 16.5.2.8.4.1-1.
- Table 6.5.5.4.4.1-2 is replaced by Table 16.5.2.8.4.1-2.
- Table 6.5.5.4.4.1-3 is replaced by Table 16.5.2.8.4.1-3.

Table 16.5.2.8.4.1-1: Supported test configurations

Configuration	Description
16.5.2.8-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.2.8-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.2.8-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.2.8-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.2.8.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.2.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.5.2.8.4.1-3: General test parameters

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
SSB Configuration	Config 1,2,4		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
SMTC Configuration			SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		15 KHz	

	Config 3		30 KHz	
PRACH Configuration			PRACH.4 FR1	
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0.
rsrp-ThresholdSSB	Config 1,2,4	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [12], section 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [12], section 5.17
CSI-RS configuration for q_0 and q_1	Config 1,4		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS	Config 1,4		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

16.5.2.8.4.2 Test procedure

Same as the test procedure given in clause 6.5.5.4.4.2.

16.5.2.8.4.3 Message contents

Same as the message contents given in clause 6.5.5.4.4.3.

16.5.2.8.5 Test requirement

Same as the test requirements given in clause 6.5.5.4.5 with following exceptions:

- Table 6.5.5.4.5-1 is replaced by Table 16.5.2.8.5-1.

Table 16.5.2.8.5-1: Cell specific test parameters

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0		dB	5.8	-2.2	-12.8	-12.8	-12.8
SNR_CSI-RS of set q_1		dB	-10.2	-10.2	10.2	10.2	10.2
CSI-RS_RP of set q_1	Config 1,2,4	dBm/ SCS	-108.2	-108.2	-87.8	-87.8	-87.8
	Config 3		-105.2	-105.2	-84.8	-84.8	-84.8
N_{oc}		dBm/ 15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 5: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 6: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 7: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 6.5.5.4.4-1.
Note 8: The SNR values are specified for testing a UE which supports 2RX on at least one band.

16.5.3 Active BWP switch delay for RedCap

16.5.3.1 DCI-based and timer-based active BWP switch for RedCap

16.5.3.1.0 Minimum conformance requirements

16.5.3.1.0.1 Minimum conformance requirements for DCI-based and time-based active BWP switch for RedCap

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ + Y which starts from the beginning of DL slot n. Where,

- Y=0, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.

- Y equals to the length of 1 slot, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. In this scenario, $T_{BWPswitchDelay}$ + Y shall follow the smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL subframe (FR1) or DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [13] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* [13] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 16.5.3.1.0.1-1.

Table 16.5.3.1.0.1-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
0	1	1	3
1	0.5	2	5
2	0.25	3	9
3	0.125	6	18
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in 38.133 [6] Clause 8.10 in the new BWP.

- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in 38.133 [6] Clause 8.10 in the new BWP.

If the BWP switch is triggered within or outside DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321, 12], UE shall be able to complete active BWP switching within the time duration of

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, or

- $T_{dormantBWPswitchDelay} = T_{BWPswitchDelay} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where

- $T_{BWPswitchDelay}$ is defined in Table 16.5.3.1.0.1-1 corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.

- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.

- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where UE receives dormancy indication.

For DCI-based BWP switch, if the new BWP is a dormant BWP, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive CSI-RS (for DL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL slot occurs right after a time duration of $T_{dormantBWPswitchDelay}$ which starts from the beginning of DL slot n.

The normative reference for this requirement is TS 38.133 [6] clauses 8.6A.2

16.5.3.1.1 NR SA FR1 DCI-based DL active BWP switch in non-DRX for 1 Rx UE

16.5.3.1.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement for 1Rx RedCap defined in TS 38.133 [6] clause 8.6A.

16.5.3.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 RX from Release 17 onwards supporting BWP adaptation of at least 2 BWPs, DCI and timer-based active BWP switching delay Type1 or Type2.

16.5.3.1.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.3.0.1 and 16.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.3.1.1.

16.5.3.1.1.4 Test description

Same as the test description given in clause 6.5.6.1.2.4.

16.5.3.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.6.1.2.4.1 with following exceptions:

- Table 6.5.6.1.2.4.1-1 is replaced by Table 16.5.3.1.1.4.1-1.

- Table 6.5.6.1.2.4.1-2 is replaced by Table 16.5.3.1.1.4.1-2.

- Table 6.5.6.1.2.4.1-3 is replaced by Table 16.5.3.1.1.4.1-3.

Table 16.5.3.1.1.4.1-1: Supported test configurations for NR SA FR1 DCI-based DL active BWP switch in non-DRX for 1 Rx UE

Configuration	Description
16.5.3.1.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.3.1.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.3.1.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.3.1.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.5.3.1.1.4.1-2: Initial conditions for NR SA FR1 DCI-based DL active BWP switch in non-DRX for 1 Rx UE

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 16.5.3.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.3.1.1.4.1-3: General test parameters for NR SA FR1 DCI-based DL active BWP switch in non-DRX for 1 Rx UE

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	200	
PDCCH and PDSCH maximum number of HARQ transmission		1	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

16.5.3.1.1.4.2 Test Procedure

Same as the test procedure given in clause 6.5.6.1.2.4.2.

16.5.3.1.1.4.3 Message Contents

Same as the message contents given in clause 6.5.6.1.2.4.3 with following exceptions:

- Table 6.5.6.1.2.4.3-3 is replaced by Table 16.5.3.1.1.4.3-1.
- Table 6.5.6.1.2.4.3-4 is replaced by Table 16.5.3.1.1.4.3-2.

Table 16.5.3.1.1.4.3-1: *BWP-Downlink* (Table 6.5.6.1.2.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1 RedCap		BWP2
pdsch-ConfigCommon CHOICE {			

setup	PDSCH-ConfigCommon	Table 6.5.6.1.2.4.3-8	
}			
}			
}			

Table 16.5.3.1.1.4.3-2: *BWP-Uplink* (Table 6.5.6.1.2.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1 RedCap	BWP-2	BWP2
}			
}			

16.5.3.1.1.5 Test Requirement

Tables 16.5.3.1.1.4.1-3 and 16.5.3.1.1.5-1 define the primary level settings including test tolerances.

Table 16.5.3.1.1.5-1: Cell specific test parameters for NR SA FR1 DCI-based DL active BWP switch in non-DRX for 1 Rx UE

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52
	Config 2		10 MHz: $N_{RB,c}$ = 52
	Config 3		20 MHz: $N_{RB,c}$ = 51
	Config 4		10 MHz: $N_{RB,c}$ = 52
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,2,3,4		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration	Config 1,2,3,4		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration	Config 1,2,3,4		DLBWP.1.1 RedCap Note 4
Initial UL BWP Configuration	Config 1,2,3,4		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration	Config 1,2,3,4		ULBWP.1.1 Note 4
Active UL BWP-2 Configuration	Config 1,4		N/A
	Config 2,3		ULBWP.1.1 RedCap Note 4
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD

	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x1 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2,4	dBm/SCS	-104
	Config 3		-101
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1,2,4	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.1 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [8].

During T1, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [12].

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 16.5.3.1.0.1-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

16.5.3.1.2 NR SA FR1 DCI-based DL active BWP switch in non-DRX for 2 Rx UE

16.5.3.1.2.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement for 2Rx RedCap defined in TS 38.133 [6] clause 8.6A.

16.5.3.1.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 RX from Release 17 onwards supporting BWP adaptation of at least 2 BWPs, DCI and timer-based active BWP switching delay Type1 or Type2.

16.5.3.1.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.3.1.2.

16.5.3.1.2.4 Test description

Same as the test description given in clause 6.5.6.1.2.4.

16.5.3.1.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.6.1.2.4.1 with following exceptions:

- Table 6.5.6.1.2.4.1-1 is replaced by Table 16.5.3.1.2.4.1-1.
- Table 6.5.6.1.2.4.1-2 is replaced by Table 16.5.3.1.2.4.1-2.
- Table 6.5.6.1.2.4.1-3 is replaced by Table 16.5.3.1.2.4.1-3.

Table 16.5.3.1.2.4.1-1: Supported test configurations for NR SA FR1 DCI-based DL active BWP switch in non-DRX for 2 Rx UE

Configuration	Description
16.5.3.1.2-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.3.1.2-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.3.1.2-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.3.1.2-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.5.3.1.2.4.1-2: Initial conditions for NR SA FR1 DCI-based DL active BWP switch in non-DRX for 2 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.3.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	

Exceptions to connection diagram		

Table 16.5.3.1.2.4.1-3: General test parameters for NR SA FR1 DCI-based DL active BWP switch in non-DRX for 2 Rx UE

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	200	
PDCCH and PDSCH maximum number of HARQ transmission		1	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

16.5.3.1.2.4.2 Test Procedure

Same as the test procedure given in clause 6.5.6.1.2.4.2.

16.5.3.1.2.4.3 Message Contents

Same as the message contents given in clause 6.5.6.1.2.4.3 with following exceptions:

- Table 6.5.6.1.2.4.3-3 is replaced by Table 16.5.3.1.2.4.3-1.
- Table 6.5.6.1.2.4.3-4 is replaced by Table 16.5.3.1.2.4.3-2.

Table 16.5.3.1.2.4.3-1: *BWP-Downlink* (Table 6.5.6.1.2.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1 RedCap		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 6.5.6.1.2.4.3-8	
}			
}			
}			

Table 16.5.3.1.2.4.3-2: *BWP-Uplink* (Table 6.5.6.1.2.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2

bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1 RedCap	BWP-2	BWP2
}			
}			

16.5.3.1.2.5 Test Requirement

Tables 16.5.3.1.2.4.1-3 and 16.5.3.1.2.5-1 define the primary level settings including test tolerances.

Table 16.5.3.1.2.5-1: Cell specific test parameters for NR SA FR1 DCI-based DL active BWP switch in non-DRX for 2 Rx UE

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1		10 MHz: $N_{RB,c}$ = 52
	Config 2		10 MHz: $N_{RB,c}$ = 52
	Config 3		20 MHz: $N_{RB,c}$ = 51
	Config 4		10 MHz: $N_{RB,c}$ = 52
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,2,3,4		DLBWP.0.2 Note 4
Active DL BWP-1 Configuration	Config 1,2,3,4		DLBWP.1.1 Note 4
Active DL BWP-2 Configuration	Config 1,2,3,4		DLBWP.1.1 RedCap Note 4
Initial UL BWP Configuration	Config 1,2,3,4		ULBWP.0.2 Note 4
Active UL BWP-1 Configuration	Config 1,2,3,4		ULBWP.1.1 Note 4
Active UL BWP-2 Configuration	Config 1,4		N/A
	Config 2,3		ULBWP.1.1 RedCap Note 4
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0

EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} Note 2	Config 1,2,4	dBm/SCS	-104
	Config 3		-101
N_{oc} Note 2		dBm/15kHz	-104
SS-RSRP Note 3	Config 1,2,4	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.1 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [8].

During T1, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k1$).

During T3, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k1$).

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [12].

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 16.5.3.1.0.1-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot ($i+T_{BWPswitchDelay}+k1$), ($j+T_{BWPswitchDelay}+k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

16.5.3.2 RRC-based active BWP switch for RedCap

16.5.3.2.0 Minimum conformance requirements

16.5.3.2.0.1 Minimum conformance requirements for RRC-based active BWP switch for RedCap

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH

(for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$NR\ Slot\ length$ is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [29] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [13], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

The normative reference for this requirement is TS 38.133 [6] clauses 8.6A.3.

16.5.3.2.1 NR SA FR1 RRC-based DL active BWP switch in non-DRX for 1 Rx UE

16.5.3.2.1.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in TS 38.133 [6] clause 8.6A.

16.5.3.2.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 RX from Release 17 onwards supporting BWP adaptation of at least 2 BWPs.

16.5.3.2.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 16.5.3.0.1 and 16.5.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.3.2.1.

16.5.3.2.1.4 Test description

Same as the test description given in clause 6.5.6.2.1.4.

16.5.3.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.6.1.2.4.1 with following exceptions:

- Table 6.5.6.2.1.4.1-1 is replaced by Table 16.5.3.2.1.4.1-1.
- Table 6.5.6.2.1.4.1-2 is replaced by Table 16.5.3.2.1.4.1-2.
- Table 6.5.6.2.1.4.1-3 is replaced by Table 16.5.3.2.1.4.1-3.

Table 16.5.3.2.1.4.1-1: Supported test configurations for NR SA FR1 RRC-based DL active BWP switch in non-DRX for 1 Rx UE

Configuration	Description
16.5.3.2.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.3.2.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.3.2.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.3.2.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,

Note:	The UE is only required to be tested in one of the supported test configurations.

Table 16.5.3.2.1.4.1-2: Initial conditions for NR SA FR1 RRC-based DL active BWP switch in non-DRX for 1 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.3.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.5.3.2.1.4.1-3: General test parameters for NR SA FR1 RRC-based DL active BWP switch in non-DRX for 1 Rx UE

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
PDCCH and PDSCH maximum number of HARQ transmission		1	
T1	s	0.2	

16.5.3.2.1.4.2 Test Procedure

Same as the test procedure given in clause 6.5.6.2.1.4.2.

16.5.3.2.1.4.3 Message Contents

Same as the message contents given in clause 6.5.6.2.1.4.3 with following exceptions:

- Table 6.5.6.2.1.4.3-1F is replaced by Table 16.5.3.2.1.4.3-1.
- Table 6.5.6.2.1.4.3-1G is replaced by Table 16.5.3.2.1.4.3-2.

Table 16.5.3.2.1.4.3-1: *BWP-Downlink* (Table 6.5.6.2.1.4.3-1E)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1 RedCap		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 5
}			
}			

Table 16.5.3.2.1.4.3-2: *BWP-Uplink* (Table 6.5.6.2.1.4.3-1E)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1 RedCap		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 5
}			
}			

16.5.3.2.1.5 Test Requirement

Tables 16.5.3.2.1.4.1-3 and 16.5.3.2.1.5-1 define the primary level settings including test tolerances.

Table 16.5.3.2.1.5-1: Cell specific test parameters for NR SA FR1 RRC-based DL active BWP switch in non-DRX for 1 Rx UE

Parameter			**Unit**	**Cell 1**
Frequency Range				FR1
Duplex mode		Config 1,4		FDD
		Config 2,3		TDD
TDD configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1,4		10 MHz: $N_{RB,c}$ = 52
		Config 2		10 MHz: $N_{RB,c}$ = 52
		Config 3		20 MHz: $N_{RB,c}$ = 51
Active BWP ID				1
Initial DL BWP Configuration		Config 1,2, 3,4		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3,4		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4		DLBWP.1.1 RedCap
	Active UL BWP-1 Configuration	Config 1, 2, 3,4		ULBWP.1.1 RedCap
Final Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1, 2, 3,4		ULBWP.1.1
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.2 FDD

	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
Antenna Configuration			1x1 Low
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS(Note 1)			
N_{oc} Note 2	Config 1,2	dBm/SCS	-104
	Config 3		-101
SS-RSRP Note 3	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.1 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [8].

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the beginning of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [12].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

16.5.3.2.2 NR SA FR1 RRC-based DL active BWP switch in non-DRX for 2 Rx UE

16.5.3.2.2.1 Test purpose

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in TS 38.133 [6] clause 8.6A.

16.5.3.2.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 RX from Release 17 onwards supporting BWP adaptation of at least 2 BWPs.

16.5.3.2.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.3.2.2.

16.5.3.2.2.4 Test description

Same as the test description given in clause 6.5.6.2.1.4.

16.5.3.2.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.6.2.1.4.1 with following exceptions:

- Table 6.5.6.2.1.4.1-1 is replaced by Table 16.5.3.2.2.4.1-1.
- Table 6.5.6.2.1.4.1-2 is replaced by Table 16.5.3.2.2.4.1-2.
- Table 6.5.6.2.1.4.1-3 is replaced by Table 16.5.3.2.2.4.1-3.

Table 16.5.3.2.2.4.1-1: Supported test configurations for NR SA FR1 RRC-based DL active BWP switch in non-DRX for 2 Rx UE

Configuration	Description
16.5.3.2.2-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.3.2.2-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.3.2.2-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.3.2.2-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.5.3.2.2.4.1-2: Initial conditions for NR SA FR1 RRC-based DL active BWP switch in non-DRX for 2 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.3.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.5.3.2.2.4.1-3: General test parameters for NR SA FR1 RRC-based DL active BWP switch in non-DRX for 2 Rx UE

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
PDCCH and PDSCH maximum number of HARQ transmission		1	

T1	s	0.2	

16.5.3.2.2.4.2 Test Procedure

Same as the test procedure given in clause 6.5.6.2.1.4.2.

16.5.3.2.2.4.3 Message Contents

Same as the message contents given in clause 6.5.6.2.1.4.3 with following exceptions:

- Table 6.5.6.2.1.4.3-1F is replaced by Table 16.5.3.2.2.4.3-1.
- Table 6.5.6.2.1.4.3-1G is replaced by Table 16.5.3.2.2.4.3-2.

Table 16.5.3.2.2.4.3-1: *BWP-Downlink* (Table 6.5.6.2.1.4.3-1E)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1 RedCap		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 5
}			
}			

Table 16.5.3.2.2.4.3-2: *BWP-Uplink* (Table 6.5.6.2.1.4.3-1E)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1 RedCap		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 5
}			
}			

16.5.3.2.2.5 Test Requirement

Tables 16.5.3.2.2.4.1-3 and 16.5.3.2.2.5-1 define the primary level settings including test tolerances.

Table 16.5.3.2.2.5-1: Cell specific test parameters for NR SA FR1 RRC-based DL active BWP switch in non-DRX for 2 Rx UE

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1

$BW_{channel}$		Config 1,4		10 MHz: $N_{RB,c}$ = 52
		Config 2		10 MHz: $N_{RB,c}$ = 52
		Config 3		20 MHz: $N_{RB,c}$ = 51
Active BWP ID				1
Initial DL BWP Configuration		Config 1,2, 3,4		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3,4		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4		DLBWP.1.1 RedCap
	Active UL BWP-1 Configuration	Config 1, 2, 3,4		ULBWP.1.1 RedCap
Final Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1, 2, 3,4		ULBWP.1.1
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.2 FDD
		Config 2		CCR.1.2 TDD
		Config 3		CCR.2.4 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS(Note 1)				
N_{oc} Note 2		Config 1,2,4	dBm/SCS	-104
		Config 3		-101
SS-RSRP Note 3		Config 1,2,4	dBm/SCS	-87
		Config 3		-84
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
Io^{Note3}		Config 1,2,4	dBm/ 9.36MHz	-58.96
		Config 3	dBm/ 38.16MHz	-52.86

Note 1:	OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.2 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [8].

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the beginning of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [12].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

16.5.4 UE specific CBW change for RedCap

16.5.4.0 Minimum conformance requirements

16.5.4.0.1 Minimum conformance requirements for UE specific CBW change

The requirements in this clause apply for a RedCap UE receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on the DL BWP with BWP ID firstActiveDownlinkBWP-Id or transmit PUSCH on the UL BWP with BWP ID firstActiveUplinkBWP-Id of the new CBW right after a time duration of $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

- DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and
- $T_{RRCprocessing\,Delay}$ is the length of the RRC procedure delay in millisecond as defined in TS 36.331 [29] clause 11.2 is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in millisecond as defined in TS 38.331 [13] clause 12, and
- $T_{CBWchangeDelayRRC} = 6\,ms$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ on the cell where UE-specific CBW change occurs. When $T_{HARQ} > T_{RRCprocessing\,Delay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [8].

The normative reference for this requirement is TS 38.133 [6] clause 8.13A.1 and 8.13A.2.

16.5.4.1 NR SA FR1 UE specific CBW change on PCell in non-DRX for 1 Rx UE

16.5.4.1.1 Test purpose

To verify the UE specific CBW change delay requirement defined in 38.133 [6] clause 8.13A.

16.5.4.1.2 Test applicability

This test applies to all types of NR RedCap UEs with 1 Rx from Release 17 onwards.

16.5.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.4.1.

16.5.4.1.4 Test description

Same as the test description given in clause 6.5.8.1.

16.5.4.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.8.1 with following exceptions:

- Table 6.5.8.1.4.1-1 is replaced by Table 16.5.4.1.4.1-1.
- Table 6.5.8.1.4.1-2 is replaced by Table 16.5.4.1.4.1-2.
- Table 6.5.8.1.4.1-3 is replaced by Table 16.5.4.1.4.1-3.

Table 16.5.4.1.4.1-1: Supported test configurations

Configuration	Description
16.5.4.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.4.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.4.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.4.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.4.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 16.5.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	- Without LTE link		

Table 16.5.4.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

16.5.4.1.4.2 Test procedure

Same as the test procedure given in clause 6.5.8.1.4.2.

16.5.4.1.4.3 Message contents

Same as the message contents given in clause 6.5.8.1.4.2

16.5.4.1.5 Test requirement

Same as the test requirements given in clause 6.5.8.1.5 with followings exceptions:

- Table 6.5.8.1.5-1 is replaced by Table 16.5.4.1.5-1.

Table 16.5.4.1.5-1: NR Cell specific test parameters

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
		Config 4		HD-FDD
TDD configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1,2,4		10 MHz: $N_{RB,c}$ = 52
		Config 3		20 MHz: $N_{RB,c}$ = 51
Active DL BWP ID				0
Initial DL BWP Configuration (BWP-1)				DLBWP.0.2
Initial UL BWP Configuration (BWP-1)				ULBWP.0.2
Initial Condition	Active DL CBW Configuration (CBW-1)			DLCBW.1.1
	Active UL CBW Configuration (CBW-1)			ULCBW.1.1
Final Condition	Active DL CBW Configuration (CBW-2)			DLCBW.1.2
	Active UL CBW Configuration (CBW-2)			ULCBW.1.2
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR.2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration				SMTC.1 RedCap FR1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
Antenna Configuration				1x1
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2		Config 1,2,4	dBm/SCS	-104
		Config 3		-101
SS-RSRP Note 3		Config 1,2,4	dBm/SCS	-87
		Config 3		-84
$\hat{E}_s/I_{ot}$			dB	17

$\hat{E}_s/N_{oc}$		dB	17
Io^{Note3}	Config 1,2,4	dBm/9.36MHz	-58.96
	Config 3	dBm/18.36MHz	-56.04
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.1 is linked with ULBWP.0.1; DLBWP.1.1 is linked with ULBWP.1.1; as defined in clause 12 of TS 38.213 [3].			

16.5.4.2 NR SA FR1 UE specific CBW change on PCell in non-DRX for 2 Rx UE

16.5.4.2.1 Test purpose

To verify the UE specific CBW change delay requirement defined in 38.133 [6] clause 8.13A.

16.5.4.2.2 Test applicability

This test applies to all types of NR RedCap UEs with 2 Rx from Release 17 onwards.

16.5.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.5.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.5.4.2.

16.5.4.2.4 Test description

Same as the test description given in clause 6.5.8.1.

16.5.4.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.5.8.1 with following exceptions:

- Table 6.5.8.1.4.1-1 is replaced by Table 16.5.4.2.4.1-1.
- Table 6.5.8.1.4.1-2 is replaced by Table 16.5.4.2.4.1-2.
- Table 6.5.8.1.4.1-3 is replaced by Table 16.5.4.2.4.1-3.

Table 16.5.4.2.4.1-1: Supported test configurations

Configuration	Description
16.5.4.2-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.5.4.2-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.5.4.2-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.5.4.2-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.5.4.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.	
Channel bandwidth	As specified by the test configuration selected from Table 16.5.4.2.4.1-1.	
Propagation conditions	AWGN	As specified in Annex C.2.2.

Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

Table 16.5.4.2.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

16.5.4.2.4.2 Test procedure

Same as the test procedure given in clause 6.5.8.1.4.2.

16.5.4.2.4.3 Message contents

Same as the message contents given in clause 6.5.8.1.4.2

16.5.4.2.5 Test requirement

Same as the test requirements given in clause 6.5.8.1.5 with followings exceptions:

- Table 6.5.8.1.5-1 is replaced by Table 16.5.4.2.5-1.

Table 16.5.4.2.5-1: NR Cell specific test parameters

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
		Config 4		HD-FDD
TDD configuration		Config 1,4		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
$BW_{channel}$		Config 1,2,4		10 MHz: $N_{RB,c}$ = 52
		Config 3		20 MHz: $N_{RB,c}$ = 51
Active DL BWP ID				0
Initial DL BWP Configuration (BWP-1)				DLBWP.0.2
Initial UL BWP Configuration (BWP-1)				ULBWP.0.2
Initial Condition	Active DL CBW Configuration (CBW-1)			DLCBW.1.1
	Active UL CBW Configuration (CBW-1)			ULCBW.1.1
Final Condition	Active DL CBW Configuration (CBW-2)			DLCBW.1.2
	Active UL CBW Configuration (CBW-2)			ULCBW.1.2
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR.2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration				SMTC.1 RedCap FR1
TRS Configuration		Config 1,4		TRS.1.1 FDD

	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
Antenna Configuration			1x2 low
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS(Note 1)			
N_{oc} Note 2	Config 1,2,4	dBm/SCS	-104
	Config 3		-101
SS-RSRP Note 3	Config 1,2,4	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
Io Note3	Config 1,2,4	dBm/9.36MHz	-58.96
	Config 3	dBm/18.36MHz	-56.04

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.1 is linked with ULBWP.0.1; DLBWP.1.1 is linked with ULBWP.1.1; as defined in clause 12 of TS 38.213 [3].

16.6 Measurement procedures for RedCap

16.6.1 Intra-frequency measurements for RedCap

16.6.1.0 Minimum conformance requirements

16.6.1.0.1 General

A measurement is defined as a SSB based intra-frequency measurement provided the centre frequency of the reference SSB of the serving cell and the centre frequency of the SSB of the neighbour cell are the same, and the subcarrier spacing of the two SSBs are also the same. The reference SSB is the SSB defined in BWP-specific *servingCellMO* under *BWP-DownlinkDedicated* of active DL BWP. If the field is absent, the reference SSB is the SSB defined in *servingCellMO* under *ServingCellConfig*.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell, even if no explicit neighbour list with physical layer cell identities is provided.

The UE can perform intra-frequency SSB based measurements without measurement gaps if

- the SSB is completely contained in the active BWP of the UE, or
- the active downlink BWP is initial BWP [3].

For intra-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in 38.133 [6] clause 9.2B.5.3.

SSB based measurements are configured along with one or two measurement timing configuration(s) (SMTC(s)) which provides periodicity, duration and offset information on a window of up to 5ms where the measurements are to be performed. For intra-frequency connected mode measurements, up to two measurement window periodicities may be configured. A single measurement window offset and measurement duration are configured per intra-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB which start earlier than the gap starting time + switching time, nor detect SSB which end later than the gap end – switching time. Switching time is 0.5ms for frequency range FR1.

The requirements in this clause apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- For 2Rx RedCap:
  - SS-RSRP related side conditions given in 38.133 [6] clauses 10.1.2 and 10.1.3 for FR1 and FR2, respectively, for a corresponding Band,
  - SS-RSRQ related side conditions given in 38.133 [6] clauses 10.1.7 and 10.1.8 for FR1 and FR2, respectively, for a corresponding Band,
  - SS-SINR related side conditions given in 38.133 [6] clauses 10.1.12 and 10.1.13 for FR1 and FR2, respectively, for a corresponding Band,
  - SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.
- For 1Rx RedCap:
  - SS-RSRP related side conditions given in clauses [x.y.z] and [x.y.z] for FR1 and FR2, respectively, for a corresponding Band,
  - SS-RSRQ related side conditions given in clauses [x.y.z] and [x.y.z] for FR1 and FR2, respectively, for a corresponding Band,
  - SS-SINR related side conditions given in clauses [x.y.z] and [x.y.z] for FR1 and FR2, respectively, for a corresponding Band,
  - SSB_RP and SSB Ês/Iot according to Annex [x.y.z] for a corresponding Band.

For 2Rx RedCap: The requirements in 38.133 [6] clause 9.2.4.3 shall apply.

For 1Rx RedCap: Reported RSRP, RSRQ, and RS-SINR measurements contained in event triggered measurement reports shall meet the requirements in 38.133 [6] clauses 10.1.2.1 (RSRP for FR1), 10.1.7.1 (RSRQ for FR1), 10.1.12.1 (RS-SINR for FR1).

The UE shall not send any event triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ with\ index_RedCap}$ or $T_{identify\ intra\ without\ index_RedCap}$ defined in clause 16.6.1.0.2 or clause 16.6.1.0.3. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index_RedCap}$ or $T_{identify_intra_with_index_RedCap}$ as defined in clause 16.6.1.0.2 or clause 16.6.1.0.3. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index_RedCap}$ or $T_{identify\ intra\ with\ index_RedCap}$ defined in clause 16.6.1.0.2 or clause 16.6.1.0.3 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra_RedCap}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clauses 9.2B.1 and 9.2B.4.3.

16.6.1.0.2 Minimum conformance requirements for event-triggered measurement without gap

The UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_without_index_RedCap}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index_RedCap}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index_RedCap}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD.

$$T_{identify_intra_without_index_RedCap} = (T_{PSS/SSS_sync_intra_RedCap} + T_{SSB_measurement_period_intra_RedCap})\ ms$$

$$T_{identify_intra_with_index_RedCap} = (T_{PSS/SSS_sync_intra_RedCap} + T_{SSB_measurement_period_intra_RedCap} + T_{SSB_time_index_intra_RedCap})\ ms$$

Where:

$T_{PSS/SSS_sync_intra_RedCap}$: it is the time period used in PSS/SSS detection given in Table 16.6.1.0.2-1 for 2RX RedCap and Table 16.6.1.0.2-2 for 1Rx RedCap.

$T_{SSB_time_index_intra_RedCap}$: it is the time period used to acquire the index of the SSB being measured given in Table 16.6.1.0.2-3 for 2RX RedCap and Table 16.6.1.0.2-4 for 1RX RedCap.

$T_{SSB_measurement_period_intra_RedCap}$: equal to a measurement period of SSB based measurement given in Table 16.6.1.0.2-5 for 2RX RedCap and Table 16.6.1.0.2-6 for 1RX RedCap.

$CSSF_{intra_RedCap}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap_RedCap,i}$ in 38.133 [6] clause 9.1A.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps.

When intra-frequency SMTC is fully non overlapping with measurement gaps, Kp=1.

Table 16.6.1.0.2-1: Time period for PSS/SSS detection, (Frequency range FR1) for 2Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 16.6.1.0.2-2: Time period for PSS/SSS detection, (Frequency range FR1) for 1Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600ms, ceil(7 x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(7 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil(7 x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 16.6.1.0.2-3: Time period for time index detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_time_index_intra_RedCap}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(120ms, ceil (3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 16.6.1.0.2-4: Time period for time index detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_time_index_intra_RedCap}$

No DRX	max(160ms, ceil([6] x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(160ms, ceil ([6] x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	Ceil([6] x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 16.6.1.0.2-5: Measurement period for intra-frequency measurements without gaps (FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 16.6.1.0.2-6: Measurement period for intra-frequency measurements without gaps (FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max([200]ms, ceil([5] x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max([200]ms, ceil(1.5x [5] x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil([5] x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

When the UE performs intra-frequency measurements in a HD-FDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

When the UE performs intra-frequency measurements in a HD-FDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

The normative reference for this requirement is TS 38.133 [6] clauses 9.2B.5.

16.6.1.0.3 Minimum conformance requirements for event-triggered measurement with gap

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_with_index_RedCap}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index_RedCap}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD.

$$T_{identify_intra_without_index_RedCap} = T_{PSS/SSS_sync_intra_RedCap} + T_{SSB_measurement_period_intra_RedCap} \text{ ms}$$

$$T_{identify_intra_with_index_RedCap} = T_{PSS/SSS_sync_intra_RedCap} + T_{SSB_measurement_period_intra_RedCap} + T_{SSB_time_index_intra_RedCap} \text{ ms}$$

Where:

$T_{PSS/SSS_sync_intra_RedCap}$: it is the time period used in PSS/SSS detection given in Table 16.6.1.0.3-1 for 2RX RedCap or Table 16.6.1.0.3-2 for 1RX RedCap.

$T_{SSB_time_index_intra_RedCap}$: it is the time period used to acquire the index of the SSB being measured given in Table 16.6.1.0.3-3 for 2RX RedCap or Table 16.6.1.0.3-4 for 1RX RedCap.

$T_{SSB_measurement_period_intra_RedCap}$: equal to a measurement period of SSB based measurement given in Table 16.6.1.0.3-5 for 2RX RedCap or Table 16.6.1.0.3-6 for 1RX RedCap.

$CSSF_{intra_RedCap}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap_RedCap,i}$ in 38.133 [6] clause 9.1A.5.2 for measurement conducted within measurement gaps.

Table 16.6.1.0.3-1: Time period for PSS/SSS detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600ms, 5 x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600ms, 5 x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	5 x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 16.6.1.0.3-2: Time period for PSS/SSS detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600 ms, 7 x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600 ms, 7 x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	7 x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 16.6.1.0.3-3: Time period for time index detection (Frequency range FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_time_index_intra_RedCap}$
No DRX	max(120ms, 3 x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(120ms, 3 x max(MGRP, SMTC period,DRX cycle) x $CSSF_{intra_RedCap}$)
DRX cycle>320ms	3 x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 16.6.1.0.3-4: Time period for time index detection (Frequency range FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_time_index_intra_RedCap}$
No DRX	max(160ms, [6] x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(160ms, [6] x max(MGRP, SMTC period,DRX cycle) x $CSSF_{intra_RedCap}$)
DRX cycle>320ms	[6] x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 16.6.1.0.3-5: Measurement period for intra-frequency measurements with gaps (FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max(200ms, 5 x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$

DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	5 x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 16.6.1.0.3-6: Measurement period for intra-frequency measurements with gaps (FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max([200] ms, [5] x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max([200] ms, ceil(1.5x [5]) x max(MGRP, SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	[5] x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

The normative reference for this requirement is TS 38.133 [6] clauses 9.2B.6.

16.6.1.1 NR SA FR1 Event triggered reporting tests without gap under non-DRX for 1 Rx UE

16.6.1.1.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in 38.133 [6] clauses 9.2B.5.1 and 9.2B.5.2.

16.6.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.1.

16.6.1.1.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.1.1.4.1-3 and Table 16.6.1.1.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the PCell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.1.1.4.1-1.

Table 16.6.1.1.4.1-1: Supported test configurations

Configuration	Description
16.6.1.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.1.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.1.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.1.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 16.6.1.1.4.1-2.

Table 16.6.1.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

1. The test parameters for PCell and neighbour cell are given in Table 16.6.1.1.4.1-3 below.

2. Message contents are defined in clause 16.6.1.1.4.3.

3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 16.6.1.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Active cell			Cell 1	
Neighbour cell			Cell 2	Cell to be identified.
RF Channel Number			1: Cell 1 and Cell 2	
CD-SSB configuration	Config 1,2,4		SSB.1 FR1	
	Config 3		SSB.1 RedCap FR1	
NCD-SSB configuration	Config 1,2,4		SSB.6 RedCap FR1 Note 1	
	Config 3		SSB.7 RedCap FR1 Note 1	
SMTC configuration for NCD-SSB	Config 1,4		SMTC.4 RedCap	
	Config 2,3		SMTC.2 RedCap	
A3-Offset		dB	-4.5	
CP length			Normal	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			N/A	OFF
Time offset between serving and neighbour cells	Config 1,4	ms	3	Asynchronous cells. The timing of Cell 2 is 3 ms later than the timing of Cell 1.
	Config 2,3	µs	3	Synchronous cells
T1		s	5	
T2		s	5	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.				

16.6.1.1.4.2 Test procedure

The test consists of two successive time periods with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

2. Set the parameters according to T1 in Table 16.6.1.1.5-1.

3. Set NR Cell 2 physical cell identity = (current NR cell 2 physical cell identity + 3) mod 1008 for current iteration of the test procedure loop.

4. SS shall transmit an *RRCReconfiguration* message to configure Event A3 triggered reporting and dedicated BWP-1, which contains NCD-SSB configuration, as specified in 16.6.1.1.4.3. RedCap-specific dedicated BWP-1 is the activated BWP. The SS transmits NCD-SSB on Cell 1 with an absolute frequency (in ARFCN value and aligned with channel raster) of

$$f_{\mathrm{NCDSSB}} = f_{\mathrm{pointA}} + \frac{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}} \cdot \left\lfloor \left(f_{\mathrm{CDSSB}} - f_{\mathrm{pointA}}\right) \cdot \frac{\Delta\mathrm{F}_{\mathrm{Global}}}{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}} \right\rfloor + \frac{N_{\mathrm{SC}}^{\mathrm{SSB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}}$$

where,

- f_{CDSSB} is the absolute frequency of CD-SSB (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- f_{pointA} is the absolute frequency of Point A (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- $\Delta \mathrm{F}_{\mathrm{Global}}$ is the granularity of the global frequency raster (in kHz) specified in 38.101-1 [2] clause 5.4.2.1;- $\mathrm{SCS}_{\mathrm{SSB}}$ is the subcarrier spacing of SSB (in kHz);
- $N_{\mathrm{SC}}^{\mathrm{RB}} = 12$, is the number of subcarriers in an RB;

- $N_{\mathrm{SC}}^{\mathrm{SSB}} = 240$, is the number of subcarriers in an SSB.

5. The UE shall transmit an *RRCReconfigurationComplete* message. T1 starts upon the SS receives the *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 16.6.1.1.5-1. T2 starts. The SS also transmits NCD-SSB on Cell 2 with an absolute frequency of f_{NCDSSB} calculated above.

7. The SS increases the number of successful tests by one if the UE transmits a *MeasurementReport* message triggered by event A3 satisfying the overall delay requirement specified in clause 16.6.1.1.5, otherwise the SS increases the number of failure tests by one.

8. After the SS receive the *MeasurementReport* message in step 7) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   or

   - switch the UE off.

9. Depending on the choice in step 8, the SS shall,

   - transmit in NR Cell 1 a *Paging* message including matched ng-5G-S-TMSI for the UE if an *RRCRelease* has been sent in step 8. If the paging fails, switches off and on the UE,

   or

   - switch on the UE if the UE is switched off in step 8.

10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.6.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.6.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM

Table 16.6.1.1.4.3-2: *MeasObjectNR* (step 4, test procedure)

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR of NCD-SSB		

smtc1	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.4 RedCap	SMTC.4 RedCap	Config 1,4
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2 RedCap	SMTC.2 RedCap	Config 2,3
}			

Table 16.6.1.1.4.3-3: *ServingCellConfig* (step 1, test procedure)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList	Not present		
firstActiveDownlinkBWP-Id	Not present		
uplinkConfig	Not present		
servingCellMO	Not present		
}			

Table 16.6.1.1.4.3-3A: *ServingCellConfig* (step 4, test procedure)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1]	BWP-Downlink	entry 1 Table 16.6.1.1.4.3-4	
}			
firstActiveDownlinkBWP-Id	1	Activate the RedCap-specific dedicated DL BWP	
uplinkConfig SEQUENCE {			
initialUplinkBWP	Not present		
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 16.6.1.1.4.3-5	
}			
firstActiveUplinkBWP-Id	1	Activate the RedCap-specific dedicated UL BWP	
pusch-ServingCellConfig	Not present		
}			
}			
servingCellMO	Not present		
}			

Table 16.6.1.1.4.3-4: *BWP-Downlink* (Table 16.6.1.1.4.3-3A)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to DLBWP.1.3 RedCap		
}			
}			

bwp-Dedicated SEQUENCE {			
nonCellDefiningSSB-r17 SEQUENCE {			
absoluteFrequencySSB-r17	ARFCN-ValueNR of NCD-SSB		
ssb-Periodicity-r17	ms80		
ssb-TimeOffset-r17	Not present		
}			
servingCellMO-r17	1	MeasObjectId associated to NCD-SSB	
}			
}			

Table 16.6.1.1.4.3-5: *BWP-Uplink* (Table 16.6.1.1.4.3-3A)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {	BWP-UplinkCommon		
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to ULBWP.1.3 RedCap		
}			
}			
}			

16.6.1.1.5 Test requirement

Table 16.6.1.1.4.1-3 and Table 16.6.1.1.5-1 define the primary level settings including test tolerances.

Table 16.6.1.1.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting tests without gap under non-DRX

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration	Config 1,4		N/A		N/A	
	Config 2		TDDConf.1.1		TDDConf.1.1	
	Config 3		TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration	Config 1,4		SR.1.1 FDD		N/A	
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
RMSI CORESET RMC configuration	Config 1,4		CR.1.1 FDD		N/A	
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
Dedicated CORESET RMC configuration	Config 1,4		CCR.1.1 FDD		N/A	
	Config 2		CCR.1.1 TDD			
	Config 3		CCR.2.1 TDD			
OCNG Patterns			OP.1		OP.1	
TRS Configuration	Config 1,4		TRS.1.1 FDD		N/A	
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
Initial DL BWP configuration			DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration			ULBWP.0.1		ULBWP.0.1	
Active DL BWP configuration			DLBWP.1.3 RedCap		DLBWP.1.3 RedCap	
Active UL BWP configuration			ULBWP.1.3 RedCap		ULBWP.1.3 RedCap	
RLM-RS			SSB		SSB	
N_{oc} Note 2	Config 1,2,4	dBm/SCS	-98			
	Config 3		-95			
N_{oc} Note 2		dBm/15 KHz	-98			
$\hat{E}_s/I_{ot}$		dB	4	-1.46	-Infinity	-1.46

$\hat{E}_s/N_{oc}$		dB	4	4	-Infinity	4
SS-RSRP Note 3	Config 1,2,4	dBm/SCS	-94	-94	-Infinity	-94
	Config 3		-91	-91	-Infinity	-91
Io	Config 1,2,4	dBm/9.36 MHz	-64.60	-62.25	-64.60	-62.25
	Config 3	dBm/18.36 MHz	-61.68	-59.34	-61.68	-59.34
Propagation Condition			AWGN			
Antenna Configuration			1x1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The overall delay is measured from the beginning of time period T2 to the time that the SS receives the first *MeasurementReport* message triggered by event A3. It is allowed to be up to $2xTTI_{DCCH}$ higher than the measurement reporting delay specified in 38.133[6] clause 9.2B.4 due to the TTI insertion uncertainty of the measurement report in DCCH.

Then the overall delay shall be no larger than: $T_{identify_intra_without_index} + 2xTTI_{DCCH}$, where

- $T_{identify_intra_without_index}$ = 1000 ms, is the time for intra-frequency cell identification specified in 38.133 [6] clause 9.2B.5.1,
- TTI_{DCCH} = 1 ms.

Which gives a total of 1002 ms.

The UE is not required to read the neighbour cell SSB index in this test.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

16.6.1.2 NR SA FR1 Event triggered reporting tests without gap under non-DRX for 2 Rx UE

16.6.1.2.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in 38.133 [6] clauses 9.2B.5.1 and 9.2B.5.2.

16.6.1.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.2.

16.6.1.2.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.1.2.4.1-3 and Table 16.6.1.2.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the PCell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.1.2.4.1-1.

Table 16.6.1.2.4.1-1: Supported test configurations

Configuration	Description
16.6.1.2-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.1.2-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.1.2-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.1.2-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 16.6.1.2.4.1-2.

Table 16.6.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

1. The test parameters for PCell and neighbour cell are given in Table 16.6.1.2.4.1-3 below.
2. Message contents are defined in clause 16.6.1.2.4.3.
3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 16.6.1.2.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Active cell			Cell 1	
Neighbour cell			Cell 2	Cell to be identified.
RF Channel Number			1: Cell 1 and Cell 2	
CD-SSB configuration	Config 1,2,4		SSB.1 FR1	
	Config 3		SSB.1 RedCap FR1	
NCD-SSB configuration	Config 1,2,4		SSB.6 RedCap FR1 Note 1	
	Config 3		SSB.7 RedCap FR1 Note 1	
SMTC configuration for NCD-SSB	Config 1,4		SMTC.4 RedCap	
	Config 2,3		SMTC.2 RedCap	
A3-Offset		dB	-4.5	
CP length			Normal	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			N/A	OFF
Time offset between serving and neighbour cells	Config 1,4	ms	3	Asynchronous cells. The timing of Cell 2 is 3 ms later than the timing of Cell 1.
	Config 2,3	µs	3	Synchronous cells
T1		s	5	
T2		s	5	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.				

16.6.1.2.4.2 Test procedure

The test consists of two successive time periods with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

2. Set the parameters according to T1 in Table 16.6.1.2.5-1.

3. Set NR Cell 2 physical cell identity = (current NR cell 2 physical cell identity + 3) mod 1008 for current iteration of the test procedure loop.

4. SS shall transmit an *RRCReconfiguration* message to configure Event A3 triggered reporting and dedicated BWP-1, which contains NCD-SSB configuration, as specified in 16.6.1.2.4.3. RedCap-specific dedicated BWP-1 is the activated BWP. The SS transmits NCD-SSB on Cell 1 with an absolute frequency (in ARFCN value and aligned with channel raster) of

$$f_{\mathrm{NCDSSB}} = f_{\mathrm{pointA}} + \frac{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}} \cdot \left[\left(f_{\mathrm{CDSSB}} - f_{\mathrm{pointA}}\right) \cdot \frac{\Delta\mathrm{F}_{\mathrm{Global}}}{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}} \right] + \frac{N_{\mathrm{SC}}^{\mathrm{SSB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}}$$

where,

- f_{CDSSB} is the absolute frequency of CD-SSB (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- f_{pointA} is the absolute frequency of Point A (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- $\Delta\mathrm{F}_{\mathrm{Global}}$ is the granularity of the global frequency raster (in kHz) specified in 38.101-1 [2] clause 5.4.2.1;- $\mathrm{SCS}_{\mathrm{SSB}}$ is the subcarrier spacing of SSB (in kHz);
- $N_{\mathrm{SC}}^{\mathrm{RB}} = 12$, is the number of subcarriers in an RB;
- $N_{\mathrm{SC}}^{\mathrm{SSB}} = 240$, is the number of subcarriers in an SSB.

5. The UE shall transmit an *RRCReconfigurationComplete* message. T1 starts upon the SS receives the *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 16.6.1.2.5-1. T2 starts. The SS also transmits NCD-SSB on Cell 2 with an absolute frequency of f_{NCDSSB} calculated above.

7. The SS increases the number of successful tests by one if the UE transmits a *MeasurementReport* message triggered by event A3 satisfying the overall delay requirement specified in clause 16.6.1.2.5, otherwise the SS increases the number of failure tests by one.

8. After the SS receive the *MeasurementReport* message in step 7) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   or

   - switch the UE off.

9. Depending on the choice in step 8, the SS shall,

   - transmit in NR Cell 1 a *Paging* message including matched ng-5G-S-TMSI for the UE if an *RRCRelease* has been sent in step 8. If the paging fails, switches off and on the UE,

   or

   - switch on the UE if the UE is switched off in step 8.

10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.6.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.6.1.2.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition SSB RLM

Table 16.6.1.2.4.3-2: *MeasObjectNR* (step 4, test procedure)

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR of NCD-SSB		
smtc1	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2 RedCap	SMTC.2 RedCap	Config 2,3
	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.4 RedCap	SMTC.4 RedCap	Config 1,4
}			

Table 16.6.1.2.4.3-3: *ServingCellConfig* (step 1, test procedure)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList	Not present		
firstActiveDownlinkBWP-Id	Not present		
uplinkConfig	Not present		
servingCellMO	Not present		
}			

Table 16.6.1.2.4.3-3A: *ServingCellConfig* (step 4, test procedure)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1]	BWP-Downlink	entry 1 Table 16.6.1.2.4.3-4	
}			
firstActiveDownlinkBWP-Id	1	Activate the RedCap-specific dedicated DL BWP	
uplinkConfig SEQUENCE {			
initialUplinkBWP	Not present		
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 16.6.1.2.4.3-5	
}			
firstActiveUplinkBWP-Id	1	Activate the RedCap-specific dedicated UL BWP	
pusch-ServingCellConfig	Not present		
}			
}			

servingCellMO	Not present		
}			

Table 16.6.1.2.4.3-4: *BWP-Downlink* (Table 16.6.1.2.4.3-3A)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to DLBWP.1.3 RedCap		
}			
}			
bwp-Dedicated SEQUENCE {			
nonCellDefiningSSB-r17 SEQUENCE {			
absoluteFrequencySSB-r17	ARFCN-ValueNR of NCD-SSB		
ssb-Periodicity-r17	ms80		
ssb-TimeOffset-r17	Not present		
}			
servingCellMO-r17	1	MeasObjectId associated with NCD-SSB	
}			
}			

Table 16.6.1.2.4.3-5: *BWP-Uplink* (Table 16.6.1.2.4.3-3A)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {	BWP-UplinkCommon		
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to ULBWP.1.3 RedCap		
}			
}			
}			

16.6.1.2.5 Test requirement

Table 16.6.1.2.4.1-3 and Table 16.6.1.2.5-1 define the primary level settings including test tolerances.

Table 16.6.1.2.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting tests without gap under non-DRX

Parameter		**Unit**	**Cell 1**		**Cell 2**	
			T1	**T2**	**T1**	**T2**
TDD configuration	Config 1,4		N/A		N/A	
	Config 2		TDDConf.1.1		TDDConf.1.1	
	Config 3		TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration	Config 1,4		SR.1.1 FDD		N/A	
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
RMSI CORESET RMC configuration	Config 1,4		CR.1.1 FDD		N/A	
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
	Config 1,4		CCR.1.1 FDD		N/A	

Dedicated CORESET RMC configuration	Config 2		CCR.1.1 TDD			
	Config 3		CCR.2.1 TDD			
OCNG Patterns			OP.1		OP.1	
TRS Configuration	Config 1,4		TRS.1.1 FDD		N/A	
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
Initial DL BWP configuration			DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration			ULBWP.0.1		ULBWP.0.1	
Active DL BWP configuration			DLBWP.1.3 RedCap		DLBWP.1.3 RedCap	
Active UL BWP configuration			ULBWP.1.3 RedCap		ULBWP.1.3 RedCap	
RLM-RS			SSB		SSB	
N_{oc} Note 2	Config 1,2,4	dBm/SCS	-98			
	Config 3		-95			
N_{oc} Note 2		dBm/15 KHz	-98			
$\hat{E}_s/I_{ot}$		dB	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$		dB	4	4	-Infinity	4
SS-RSRP Note 3	Config 1,2,4	dBm/SCS	-94	-94	-Infinity	-94
	Config 3		-91	-91	-Infinity	-91
Io	Config 1,2,4	dBm/9.36 MHz	-64.60	-62.25	-64.60	-62.25
	Config 3	dBm/18.36 MHz	-61.68	-59.34	-61.68	-59.34
Propagation Condition			AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

The overall delay is measured from the beginning of time period T2 to the time that the SS receives the first *MeasurementReport* message triggered by event A3. It is allowed to be up to $2xTTI_{DCCH}$ higher than the measurement reporting delay specified in 38.133[6] clause 9.2B.4 due to the TTI insertion uncertainty of the measurement report in DCCH.

Then the overall delay shall be no larger than: $T_{identify_intra_without_index} + 2xTTI_{DCCH}$, where

- $T_{identify_intra_without_index}$ = 1000 ms, is the time for intra-frequency cell identification specified in 38.133 [6] clause 9.2B.5.1,
- TTI_{DCCH} = 1 ms.

Which gives a total of 1002 ms.

The UE is not required to read the neighbour cell SSB index in this test.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

16.6.1.3 NR SA FR1 Event triggered reporting tests without gap under DRX for 1 Rx UE

16.6.1.3.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in 38.133 [6] clauses 9.2B.5.1 and 9.2B.5.2.

16.6.1.3.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 onwards and supporting long DRX cycle.

16.6.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.3.

16.6.1.3.4 Test description

16.6.1.3.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.1.2.4.1 with following exceptions:

- Table 6.6.1.2.4.1-1 is replaced by Table 16.6.1.3.4.1-1.
- Table 6.6.1.2.4.1-2 is replaced by Table 16.6.1.3.4.1-2.
- Table 6.6.1.2.4.1-3 is replaced by Table 16.6.1.3.4.1-3.

Table 16.6.1.3.4.1-1: Supported test configurations

Configuration	Description
16.6.1.3-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
16.6.1.3-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
16.6.1.3-3	30 kHz SSB SCS, 20MHz bandwidth, TDD duplex mode
16.6.1.3-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.6.1.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.1.3.4.1-3: General test parameters for SA intra-frequency event triggered reporting tests without gap for FR1 under DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1,2,3,4	Cell 1		
Neighbour cell		1,2,3,4	Cell 2		Cell to be identified.
RF Channel Number		1,2,3,4	1: Cell 1 and Cell 2		
SSB configuration		1,2,4	SSB.1 FR1		
		3	SSB.1 RedCap FR1		
SMTC configuration		1,4	SMTC.2		
		2,3	SMTC.1		
A3-Offset	dB	1,2,3,4	-4.5		
CP length		1,2,3,4	Normal		
Hysteresis	dB	1,2,3,4	0		
Time To Trigger	s	1,2,3,4	0		
Filter coefficient		1,2,3,4	0		L3 filtering is not used
DRX	ms	1,2,3,4	DRX.1	DRX.7	
Time offset between serving and neighbour cells		1,4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1
		2,3	3 us		Synchronous cells
T1	s	1,2,3,4	5		
T2	s	1,2,3,4	5	10	

16.6.1.3.4.2 Test procedure

Same as the test procedure given in 6.6.1.2.4.2 with following exceptions:

- Step 6 in 6.6.1.2.4.2 is replaced by following step.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 922 ms for Test 1 or less than 7682 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

16.6.1.3.4.3 Message contents

Same as the message contents given in 6.6.1.2.4.3.

16.6.1.3.5 Test requirement

Same as the test requirement given in 6.6.1.2.5 with following exceptions:

- Table 6.6.1.2.5-1 is replaced by Table 16.6.1.3.5-1.
- The overall delay measured is expressed as:

  Overall delays measured = $T_{PSS/SSS_sync_intra_RedCap}$ + $T_{SSB_measurement_period_intra_RedCap}$ + TTI insertion uncertainty

  - $T_{PSS/SSS_sync_intra_RedCap}$ = 600 ms for Test 1, and $T_{PSS/SSS_sync_intra_RedCap}$ = 4480 ms for Test 2;
  - $T_{SSB_measurement_period_intra_RedCap}$= 320 ms for Test 1, and $T_{PSS/SSS_sync_intra_RedCap}$ = 3200 ms for Test 2
  - TTI insertion uncertainty = 2 ms

  As a result, the overall delay measured for Test 1 and Test 2 shall be less than a total of 922 ms and 7682ms respectively.

Table 16.6.1.3.5-1: NR Cell specific test parameters

Parameter	Unit	Test config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1,4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1,4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1,2,3,4	OP.1		OP.1	
TRS Configuration		1,4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3,4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1,2,3,4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1,2,3,4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1,2,4	-98			
		3	-95			
N_{oc} Note 2	dBm/15 KHz	1,2,3,4	-98			
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	4	-1.46	-Infinity	-1.46

$\hat{E}_s/N_{oc}$	dB	1,2,3,4	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS	1,2,4	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/ 9.36 MHz	1,2,4	-64.60	-62.25	Specified in Cell 1 columns	
	dBm/ 18.36 MHz	3	-61.68	-59.34		
Propagation Condition		1,2,3,4	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

16.6.1.4 NR SA FR1 Event triggered reporting tests without gap under DRX for 2 Rx UE

16.6.1.4.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in 38.133 [6] clauses 9.2B.5.1 and 9.2B.5.2.

16.6.1.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 onwards and supporting long DRX cycle.

16.6.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.4.

16.6.1.4.4 Test description

16.6.1.4.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.1.2.4.1 with following exceptions:

- Table 6.6.1.2.4.1-1 is replaced by Table 16.6.1.4.4.1-1.
- Table 6.6.1.2.4.1-2 is replaced by Table 16.6.1.4.4.1-2.
- Table 6.6.1.2.4.1-3 is replaced by Table 16.6.1.4.4.1-3.

Table 16.6.1.4.4.1-1: Supported test configurations

Configuration	Description
16.6.1.4-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
16.6.1.4-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
16.6.1.4-3	30 kHz SSB SCS, 20MHz bandwidth, TDD duplex mode
16.6.1.4-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.6.1.4.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

Table 16.6.1.4.4.1-3: General test parameters for SA intra-frequency event triggered reporting tests without gap for FR1 under DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1,2,3,4	Cell 1		
Neighbour cell		1,2,3,4	Cell 2		Cell to be identified.
RF Channel Number		1,2,3,4	1: Cell 1 and Cell 2		
SSB configuration		1,2,4	SSB.1 FR1		
		3	SSB.1 RedCap FR1		
SMTC configuration		1,4	SMTC.2		
		2,3	SMTC.1		
A3-Offset	dB	1,2,3,4	-4.5		
CP length		1,2,3,4	Normal		
Hysteresis	dB	1,2,3,4	0		
Time To Trigger	s	1,2,3,4	0		
Filter coefficient		1,2,3,4	0		L3 filtering is not used
DRX	ms	1,2,3,4	DRX.1	DRX.7	
Time offset between serving and neighbour cells		1,4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1
		2,3	3 us		Synchronous cells
T1	s	1,2,3,4	5		
T2	s	1,2,3,4	5	10	

16.6.1.4.4.2 Test procedure

Same as the test procedure given in 6.6.1.2.4.2.

16.6.1.4.4.3 Message contents

Same as the message contents given in 6.6.1.2.4.3.

16.6.1.4.5 Test requirement

Same as the test requirement given in 6.6.1.2.5 with following exceptions:

- Table 6.6.1.2.5-1 is replaced by Table 16.6.1.4.5-1.
- The overall delay measured is expressed as:

Overall delays measured = $T_{PSS/SSS_sync_intra_RedCap}$ + $T_{SSB_measurement_period_intra_RedCap}$ + TTI insertion uncertainty

- $T_{PSS/SSS_sync_intra_RedCap}$ = 600 ms for Test 1, and $T_{PSS/SSS_sync_intra_RedCap}$ = 3200 ms for Test 2;
- $T_{SSB_measurement_period_intra_RedCap}$= 320 ms for Test 1, and $T_{PSS/SSS_sync_intra_RedCap}$ = 3200 ms for Test 2
- TTI insertion uncertainty = 2 ms

As a result, the overall delay measured for Test 1 and Test 2 shall be less than a total of 922 ms and 6402 ms respectively.

Table 16.6.1.4.5-1: NR Cell specific test parameters

Parameter	Unit	Test config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1,4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1,4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1,2,3,4	OP.1		OP.1	
TRS Configuration		1,4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3,4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1,2,3,4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1,2,3,4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1,2,4	-98			
		3	-95			
N_{oc} Note 2	dBm/15 KHz	1,2,3,4	-98			
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS	1,2,4	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/ 9.36 MHz	1,2,4	-64.60	-62.25	Specified in Cell 1 columns	
	dBm/ 18.36 MHz	3	-61.68	-59.34		
Propagation Condition		1,2,3,4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.6.1.5 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX for 1 Rx UE

16.6.1.5.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in 38.133 [6] clause 9.2B.6.1 and 9.2B.6.2.

16.6.1.5.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards supporting CSI-RS based RLM and BWP operation without bandwidth restriction.

16.6.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.5.

16.6.1.5.4 Test description

16.6.1.5.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.1.3.4.1 with following exceptions:

- Table 6.6.1.3.4.1-1 is replaced by Table 16.6.1.5.4.1-1.
- Table 6.6.1.3.4.1-2 is replaced by Table 16.6.1.5.4.1-2.
- Table 6.6.1.3.4.1-3 is replaced by Table 16.6.1.5.4.1-3.

Table 16.6.1.5.4.1-1: Supported test configurations

Configuration	Description
16.6.1.5-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.1.5-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.1.5-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.1.5-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.6.1.5.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.1.5.4.1-3: General test parameters

Parameter	Unit	Test config.	Value	Comment
Active cell		1,2,3,4	Cell 1	
Neighbour cell		1,2,3,4	Cell 2	Cell to be identified.
RF Channel Number		1,2,3,4	1: Cell 1 and Cell 2	
Measurement gap type		1,2,3,4	Per-UE gaps	
Measurement gap repetition periodicity	ms	1,2,3,4	40	
Measurement gap length	ms	1,2,3,4	6	
Measurement gap offset	ms	1,2,3,4	39	
SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1,4	SMTC.2	
		2,3	SMTC.1	
CSI-RS parameters		1,4	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1,2,3,4	-4.5	
CP length		1,2,3,4	Normal	

Hysteresis	dB	1,2,3,4	0	
Time To Trigger	s	1,2,3,4	0	
Filter coefficient		1,2,3,4	0	L3 filtering is not used
DRX	ms	1,2,3,4	N/A	OFF
Time offset between serving and neighbour cells		1,4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2,3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

16.6.1.5.4.2 Test procedure

Same as the test procedure given in clause 6.6.1.3.4.2.

16.6.1.5.4.3 Message contents

Same as the message contents given in clause 6.6.1.3.4.3 with the following exception:

- For test configuration 16.6.1.5-1 and 16.6.1.5-4,
  - Table H.3.1-3 is used with condition INTRA-FREQ MO.
  - Table 7.3.1-3 specified in 38.508-1 [14] is used with condition SMTC.2.
- For test configuration 16.6.1.5-2 and 16.6.1.5-3,
  - Table H.3.1-3 is used with condition INTRA-FREQ MO and Synchronous cells.
  - Table 7.3.1-3 specified in 38.508-1 [14] is used with condition SMTC.1.

16.6.1.5.5 Test requirement

Same as the test requirements given in clause 6.6.1.3.5 with following exceptions:

- Table 6.6.1.3.5-1 is replaced by Table 16.6.1.5.5-1.

Table 16.6.1.5.5-1: Cell specific test parameters

Parameter	Unit	Test config.	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1,4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1,4	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD			
		3	CCR.2.3 TDD			
OCNG Patterns		1,2,3,4	OP.1		OP.1	
TRS Configuration		1,4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3,4	DLBWP.1.2 RedCap		DLBWP.1.1	
Active UL BWP configuration		1,2,3,4	ULBWP.1.2 RedCap		ULBWP.1.1	

RLM-RS		1,2,3,4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,2,4	-98			
		3	-95			
N_{oc} Note 2	dBm/15 KHz	1,2,3,4	-98			
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS	1,2,4	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1,2,4	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1,2,3,4	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

16.6.1.6 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX for 2 Rx UE

16.6.1.6.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in 38.133 [6] clause 9.2B.6.1 and 9.2B.6.2.

16.6.1.6.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting CSI-RS based RLM and BWP operation without bandwidth restriction.

16.6.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.6.

16.6.1.6.4 Test description

16.6.1.6.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.1.3.4.1 with following exceptions:

- Table 6.6.1.3.4.1-1 is replaced by Table 16.6.1.6.4.1-1.
- Table 6.6.1.3.4.1-2 is replaced by Table 16.6.1.6.4.1-2.
- Table 6.6.1.3.4.1-3 is replaced by Table 16.6.1.6.4.1-3.

Table 16.6.1.6.4.1-1: Supported test configurations

Configuration	Description
16.6.1.6-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.1.6-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.1.6-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.1.6-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.6.1.6.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram			

Table 16.6.1.6.4.1-3: General test parameters

Parameter	Unit	Test config	Value	Comment
Active cell		1,2,3,4	Cell 1	
Neighbour cell		1,2,3,4	Cell 2	Cell to be identified.
RF Channel Number		1,2,3,4	1: Cell 1 and Cell 2	
Measurement gap type		1,2,3,4	Per-UE gaps	
Measurement gap repetition periodicity	ms	1,2,3,4	40	
Measurement gap length	ms	1,2,3,4	6	
Measurement gap offset	ms	1,2,3,4	39	
SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1,4	SMTC.2	
		2,3	SMTC.1	
CSI-RS parameters		1,4	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1,2,3,4	-4.5	
CP length		1,2,3,4	Normal	
Hysteresis	dB	1,2,3,4	0	
Time To Trigger	s	1,2,3,4	0	
Filter coefficient		1,2,3,4	0	L3 filtering is not used
DRX	ms	1,2,3,4	N/A	OFF
Time offset between serving and neighbour cells		1,4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2,3	3 μs	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

16.6.1.6.4.2 Test procedure

Same as the test procedure given in clause 6.6.1.3.4.2.

16.6.1.6.4.3 Message contents

Same as the message contents given in clause 6.6.1.3.4.3 with the following exception:

- For test configuration 16.6.1.6-1 and 16.6.1.6-4,
  - Table H.3.1-3 is used with condition INTRA-FREQ MO.
  - Table 7.3.1-3 specified in 38.508-1 [14] is used with condition SMTC.2.
- For test configuration 16.6.1.6-2 and 16.6.1.6-3,

- Table H.3.1-3 is used with condition INTRA-FREQ MO and Synchronous cells.
- Table 7.3.1-3 specified in 38.508-1 [14] is used with condition SMTC.1.

16.6.1.6.5 Test requirement

Same as the test requirements given in clause 6.6.1.3.5 with following exceptions:

- Table 6.6.1.3.5-1 is replaced by Table 16.6.1.6.5-1.

Table 16.6.1.6.5-1: Cell specific test parameters

Parameter	Unit	Test config.	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1,4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1,4	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD			
		3	CCR.2.3 TDD			
OCNG Patterns		1,2,3,4	OP.1		OP.1	
TRS Configuration		1,4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3,4	DLBWP.1.2 RedCap		DLBWP.1.1	
Active UL BWP configuration		1,2,3,4	ULBWP.1.2 RedCap		ULBWP.1.1	
RLM-RS		1,2,3,4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,2,4	-98			
		3	-95			
N_{oc} Note 2	dBm/15 KHz	1,2,3,4	-98			
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS	1,2,4	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1,2,4	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1,2,3,4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.6.1.7 NR SA FR1 Event triggered reporting tests with per-UE gaps under DRX for 1 Rx UE

16.6.1.7.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in 38.133 [6] clauses 9.2B.6.1 and 9.2B.6.2.

16.6.1.7.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 onwards and supporting CSI-RS-based RLM, BWP operation without bandwidth restriction and long DRX cycle.

16.6.1.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.7.

16.6.1.7.4 Test description

16.6.1.7.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.1.4.4.1 with following exceptions:

- Table 6.6.1.4.4.1-1 is replaced by Table 16.6.1.7.4.1-1.
- Table 6.6.1.4.4.1-2 is replaced by Table 16.6.1.7.4.1-2.
- Table 6.6.1.4.4.1-3 is replaced by Table 16.6.1.7.4.1-3.

Table 16.6.1.7.4.1-1: Supported test configurations

Configuration	Description
16.6.1.7-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
16.6.1.7-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
16.6.1.7-3	30 kHz SSB SCS, 20MHz bandwidth, TDD duplex mode
16.6.1.7-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.6.1.7.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.1.7.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1,2,3,4	Cell 1		

Neighbour cell		1,2,3,4	Cell 2		Cell to be identified.
RF Channel Number		1,2,3,4	1: Cell 1 and Cell 2		
Measurement gap type		1,2,3,4,	Per-UE gaps		
Measurement gap repetition periodicity	ms	1,2,3,4	40		
Measurement gap length	ms	1,2,3,4	6		
Measurement gap offset	ms	1,2,3,4	39		
SSB configuration		1,2,4	SSB.1 FR1		
		3	SSB.1 RedCap FR1		
SMTC configuration		1,4	SMTC.**2**		
		2,3	SMTC.1		
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0		
		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1,2,3,4	-4.5		
CP length		1,2,3,4	Normal		
Hysteresis	dB	1,2,3,4	0		
Time To Trigger	s	1,2,3,4	0		
Filter coefficient		1,2,3,4	0		L3 filtering is not used
DRX	ms	1,2,3,4	DRX.1	DRX.7	
Time offset between serving and neighbour cells		1,4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1
		2,3	3 us		Synchronous cells
T1	s	1,2,3,4	5		
T2	s	1,2,3,4	5	10	

16.6.1.7.4.2 Test procedure

Same as the test procedure given in 6.6.1.4.4.2 with following exceptions:

- Step 6 in 6.6.1.4.4.2 is replaced by following step.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 922 ms for Test 1 or less than 7682 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

16.6.1.7.4.3 Message contents

Same as the message contents given in 6.6.1.4.4.3.

16.6.1.7.5 Test requirement

Same as the test requirement given in 6.6.1.4.5 with following exceptions:

- Table 6.6.1.4.5-1 is replaced by Table 16.6.1.7.5-1.

- The overall delay measured is expressed as:

  Overall delays measured = $T_{PSS/SSS_sync_intra_RedCap}$ + $T_{SSB_measurement_period_intra_RedCap}$ + TTI insertion uncertainty

  - $T_{PSS/SSS_sync_intra_RedCap}$ = 600 ms for Test 1, and $T_{PSS/SSS_sync_intra_RedCap}$ = 4480 ms for Test 2;

  - $T_{SSB_measurement_period_intra_RedCap}$= 320 ms for Test 1, and $T_{PSS/SSS_sync_intra_RedCap}$ = 3200 ms for Test 2

  - TTI insertion uncertainty = 2 ms

  As a result, the overall delay measured for Test 1 and Test 2 shall be less than a total of 922 ms and 7682ms respectively.

Table 16.6.1.7.5-1: NR Cell specific test parameters

Parameter	Unit	Test config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1,4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1,4	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD			
		3	CCR.2.3 TDD			
OCNG Patterns		1,2,3,4	OP.1		OP.1	
TRS Configuration		1,4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3,4	DLBWP.1.2 RedCap		DLBWP.1.1	
Active UL BWP configuration		1,2,3,4	ULBWP.1.2 RedCap		ULBWP.1.1	
RLM-RS		1,2,3,4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,2,4	-98			
		3	-95			
N_{oc} Note 2	dBm/15 KHz	1,2,3,4	-98			
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS	1,2,4	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/ 9.36 MHz	1,2,4	-64.60	-62.25	Specified in Cell 1 columns	
	dBm/ 18.36 MHz	3	-61.68	-59.34		
Propagation Condition		1,2,3,4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.6.1.8 NR SA FR1 Event triggered reporting tests with per-UE gaps under DRX for 2 Rx UE

16.6.1.8.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in 38.133 [6] clauses 9.2B.6.1 and 9.2B.6.2.

16.6.1.8.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 onwards and supporting CSI-RS-based RLM, BWP operation without bandwidth restriction and long DRX cycle.

16.6.1.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.8.

16.6.1.8.4 Test description

16.6.1.8.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.1.4.4.1 with following exceptions:

- Table 6.6.1.4.4.1-1 is replaced by Table 16.6.1.8.4.1-1.
- Table 6.6.1.4.4.1-2 is replaced by Table 16.6.1.8.4.1-2.
- Table 6.6.1.4.4.1-3 is replaced by Table 16.6.1.8.4.1-3.

Table 16.6.1.8.4.1-1: Supported test configurations

Configuration	Description
16.6.1.8-1	15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
16.6.1.8-2	15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
16.6.1.8-3	30 kHz SSB SCS, 20MHz bandwidth, TDD duplex mode
16.6.1.8-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.6.1.8.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

Table 16.6.1.8.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1,2,3,4	Cell 1		
Neighbour cell		1,2,3,4	Cell 2		Cell to be identified.
RF Channel Number		1,2,3,4	1: Cell 1 and Cell 2		
Measurement gap type		1,2,3,4,	Per-UE gaps		
Measurement gap repetition periodicity	ms	1,2,3,4	40		
Measurement gap length	ms	1,2,3,4	6		
Measurement gap offset	ms	1,2,3,4	39		
SSB configuration		1,2,4	SSB.1 FR1		
		3	SSB.1 RedCap FR1		
SMTC configuration		1,4	SMTC.2		
		2,3	SMTC.1		
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0		

		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1,2,3,4	-4.5		
CP length		1,2,3,4	Normal		
Hysteresis	dB	1,2,3,4	0		
Time To Trigger	s	1,2,3,4	0		
Filter coefficient		1,2,3,4	0		L3 filtering is not used
DRX	ms	1,2,3,4	DRX.1	DRX.7	
Time offset between serving and neighbour cells		1,4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1
		2,3	3 us		Synchronous cells
T1	s	1,2,3,4	5		
T2	s	1,2,3,4	5	10	

16.6.1.8.4.2 Test procedure

Same as the test procedure given in 6.6.1.4.4.2.

16.6.1.8.4.3 Message contents

Same as the message contents given in 6.6.1.4.4.3.

16.6.1.8.5 Test requirement

Same as the test requirement given in 6.6.1.4.5 with following exceptions:

- Table 6.6.1.4.5-1 is replaced by Table 16.6.1.8.5-1.
- The overall delay measured is expressed as:

Overall delays measured = $T_{PSS/SSS_sync_intra_RedCap}$ + $T_{SSB_measurement_period_intra_RedCap}$ + TTI insertion uncertainty

- $T_{PSS/SSS_sync_intra_RedCap}$ = 600 ms for Test 1, and $T_{PSS/SSS_sync_intra_RedCap}$ = 3200 ms for Test 2;
- $T_{SSB_measurement_period_intra_RedCap}$ = 320 ms for Test 1, and $T_{PSS/SSS_sync_intra_RedCap}$ = 3200 ms for Test 2
- TTI insertion uncertainty = 2 ms

As a result, the overall delay measured for Test 1 and Test 2 shall be less than a total of 922 ms and 6402 ms respectively.

Table 16.6.1.8.5-1: NR Cell specific test parameters

Parameter	Unit	Test config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1,4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1,4	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD			
		3	CCR.2.3 TDD			
OCNG Patterns		1,2,3,4	OP.1		OP.1	
TRS Configuration		1,4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			

		3	TRS.1.2 TDD			
Initial BWP configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3,4	DLBWP.1.2 RedCap		DLBWP.1.1	
Active UL BWP configuration		1,2,3,4	ULBWP.1.2 RedCap		ULBWP.1.1	
RLM-RS		1,2,3,4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,2,4	-98			
		3	-95			
N_{oc} Note 2	dBm/15 KHz	1,2,3,4	-98			
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS	1,2,4	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/ 9.36 MHz	1,2,4	-64.60	-62.25	Specified in Cell 1 columns	
	dBm/ 18.36 MHz	3	-61.68	-59.34		
Propagation Condition		1,2,3,4	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

16.6.1.9 NR SA FR1 Event triggered reporting tests without gap under non-DRX with SSB index reading for 1 Rx UE

16.6.1.9.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in 38.133 [6] clauses 9.2B.5.1 and 9.2B.5.2.

16.6.1.9.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.6.1.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.9.

16.6.1.9.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for FDD PCell and neighbour cell are given in Table 16.6.1.9.4.1-3 and Table 16.6.1.9.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the PCell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.1.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.1.9.4.1-1.

Table 16.6.1.9.4.1-1: Supported test configurations

Configuration	Description
16.6.1.9-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.1.9-2	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 16.6.1.9.4.1-2.

Table 16.6.1.9.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.9.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

1. The test parameters for PCell and neighbour cell are given in Table 16.6.1.9.4.1-3 below.

2. Message contents are defined in clause 16.6.1.9.4.3.

3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 16.6.1.9.4.1-3: General test parameters

Parameter	Unit	Value	Comment
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
RF Channel Number		1: Cell 1 and Cell 2	
CD-SSB configuration		SSB.1 FR1	
NCD-SSB configuration		SSB.6 RedCap FR1 Note 1	
SMTC configuration for CD-SSB		SMTC.2	
SMTC configuration for NCD-SSB		SMTC.4 RedCap	
A3-Offset	dB	-4.5	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		N/A	OFF
Time offset between serving and neighbour cells	ms	3	Asynchronous cells. The timing of Cell 2 is 3 ms later than the timing of Cell 1.
T1	s	5	
T2	s	5	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.			

16.6.1.9.4.2 Test procedure

The test consists of two successive time periods with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

2. Set the parameters according to T1 in Table 16.6.1.9.5-1.

3. Set NR Cell 2 physical cell identity = (current NR cell 2 physical cell identity + 3) mod 1008 for current iteration of the test procedure loop.

4. SS shall transmit an *RRCReconfiguration* message to configure Event A3 triggered reporting and dedicated BWP-1, which contains NCD-SSB configuration, as specified in 16.6.1.9.4.3. RedCap-specific dedicated BWP-1 is the activated BWP. The SS transmits NCD-SSB on Cell 1 with an absolute frequency (in ARFCN value and aligned with channel raster) of

$$f_{\mathrm{NCDSSB}} = f_{\mathrm{pointA}} + \frac{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}} \cdot \left[\left(f_{\mathrm{CDSSB}} - f_{\mathrm{pointA}}\right) \cdot \frac{\Delta\mathrm{F}_{\mathrm{Global}}}{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}} \right] + \frac{N_{\mathrm{SC}}^{\mathrm{SSB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}}$$

where,

- f_{CDSSB} is the absolute frequency of CD-SSB (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- f_{pointA} is the absolute frequency of Point A (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- $\Delta\mathrm{F}_{\mathrm{Global}}$ is the granularity of the global frequency raster (in kHz) specified in 38.101-1 [2] clause 5.4.2.1;- $\mathrm{SCS}_{\mathrm{SSB}}$ is the subcarrier spacing of SSB (in kHz);
- $N_{\mathrm{SC}}^{\mathrm{RB}} = 12$, is the number of subcarriers in an RB;
- $N_{\mathrm{SC}}^{\mathrm{SSB}} = 240$, is the number of subcarriers in an SSB.

5. The UE shall transmit an *RRCReconfigurationComplete* message. T1 starts upon the SS receives the *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 16.6.1.9.5-1. T2 starts. The SS also transmits NCD-SSB on Cell 2 with an absolute frequency of f_{NCDSSB} calculated above.

7. The SS increases the number of successful tests by one if the UE transmits a *MeasurementReport* message triggered by event A3 satisfying the overall delay requirement specified in clause 16.6.1.9.5, otherwise the SS increases the number of failure tests by one.

8. After the SS receive the *MeasurementReport* message in step 7) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   or

   - switch the UE off.

9. Depending on the choice in step 8, the SS shall,

   - transmit in NR Cell 1 a *Paging* message including matched ng-5G-S-TMSI for the UE if an *RRCRelease* has been sent in step 8. If the paging fails, switches off and on the UE,

   or

   - switch on the UE if the UE is switched off in step 8.

10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.6.1.9.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.6.1.9.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with condition SSB Index and A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ and SSB Index Table H.3.1-8 with Condition SSB RLM

Table 16.6.1.9.4.3-2: *MeasObjectNR* (step 4, test procedure)

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR of NCD-SSB		
smtc1	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.4 RedCap	SMTC.4 RedCap	
}			

Table 16.6.1.9.4.3-3: *ServingCellConfig* (step 1, test procedure)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList	Not present		
firstActiveDownlinkBWP-Id	Not present		
uplinkConfig	Not present		
servingCellMO	Not present		
}			

Table 16.6.1.9.4.3-3A: *ServingCellConfig* (step 4, test procedure)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1]	BWP-Downlink	entry 1 Table 16.6.1.9.4.3-4	
}			
firstActiveDownlinkBWP-Id	1	Activate the RedCap-specific dedicated DL BWP	
uplinkConfig SEQUENCE {			
initialUplinkBWP	Not present		
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 16.6.1.9.4.3-5	
}			
firstActiveUplinkBWP-Id	1	Activate the RedCap-specific dedicated UL BWP	
pusch-ServingCellConfig	Not present		
}			
}			
servingCellMO	Not present		
}			

Table 16.6.1.9.4.3-4: *BWP-Downlink* (Table 16.6.1.9.4.3-3A)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to DLBWP.1.3 RedCap		
}			
}			
bwp-Dedicated SEQUENCE {			
nonCellDefiningSSB-r17 SEQUENCE {			
absoluteFrequencySSB-r17	ARFCN-ValueNR of NCD-SSB		
ssb-Periodicity-r17	ms80		
ssb-TimeOffset-r17	Not present		
}			
servingCellMO-r17	1	MeasObjectID associated with NCD-SSB	
}			
}			

Table 16.6.1.9.4.3-5: *BWP-Uplink* (Table 16.6.1.9.4.3-3A)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {	BWP-UplinkCommon		
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to ULBWP.1.3 RedCap		
}			
}			
}			

16.6.1.9.5 Test requirement

Table 16.6.1.9.4.1-3 and Table 16.6.1.9.5-1 define the primary level settings including test tolerances.

Table 16.6.1.9.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting tests without gap under non-DRX

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
TDD configuration		N/A		N/A	
PDSCH RMC configuration		SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		CCR.1.1 FDD		N/A	
OCNG Patterns		OP.1		OP.1	
TRS Configuration		TRS.1.1 FDD		N/A	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
Active DL BWP configuration		DLBWP.1.3 RedCap Note 4		DLBWP.1.3 RedCap Note 4	
Active UL BWP configuration		ULBWP.1.3 RedCap Note 5		ULBWP.1.3 RedCap Note 5	
RLM-RS		SSB		SSB	
N_{oc} Note 2	dBm/SCS	-98			
N_{oc} Note 2	dBm/15 KHz	-98			

$\hat{E}_s/I_{ot}$	dB	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	-64.60	-62.25	-64.60	-62.25
Propagation Condition		AWGN			
Antenna Configuration		1x1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dedicated DL BWP2 corresponding to NCD-SSB PRB index.
Note 5: The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.

The overall delay is measured from the beginning of time period T2 to the time that the SS receives the first *MeasurementReport* message triggered by event A3. It is allowed to be up to $2xTTI_{DCCH}$ higher than the measurement reporting delay specified in 38.133[6] clause 9.2B.4 due to the TTI insertion uncertainty of the measurement report in DCCH.

Then the overall delay shall be no larger than: $T_{identify_intra_with_index} + 2xTTI_{DCCH}$, where

- $T_{identify_intra_with_index}$ = 1480 ms, is the time for intra-frequency cell identification specified in 38.133 [6] clause 9.2B.5.1,

- TTI_{DCCH} = 1 ms.

Which gives a total of 1482 ms.

The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

16.6.1.10 NR SA FR1 Event triggered reporting tests without gap under non-DRX with SSB index reading for 2 Rx UE

16.6.1.10.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in 38.133 [6] clauses 9.2B.5.1 and 9.2B.5.2.

16.6.1.10.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.6.1.10.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.10.

16.6.1.10.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for FDD PCell and neighbour cell are given in Table 16.6.1.10.4.1-3 and Table 16.6.1.10.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the PCell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.1.10.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.1.10.4.1-1.

Table 16.6.1.10.4.1-1: Supported test configurations

Configuration	Description
16.6.1.10-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.1.10-2	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 16.6.1.10.4.1-2.

Table 16.6.1.10.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.10.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

1. The test parameters for PCell and neighbour cell are given in Table 16.6.1.10.4.1-3 below.
2. Message contents are defined in clause 16.6.1.10.4.3.
3. There is one carrier and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 16.6.1.10.4.1-3: General test parameters

Parameter	Unit	Value	Comment
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
RF Channel Number		1: Cell 1 and Cell 2	
CD-SSB configuration		SSB.1 FR1	
NCD-SSB configuration		SSB.6 RedCap FR1 Note 1	
SMTC configuration for CD-SSB		SMTC.2	
SMTC configuration for NCD-SSB		SMTC.4 RedCap	
A3-Offset	dB	-4.5	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		N/A	OFF
Time offset between serving and neighbour cells	ms	3	Asynchronous cells. The timing of Cell 2 is 3 ms later than the timing of Cell 1.
T1	s	5	
T2	s	5	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.			

16.6.1.10.4.2 Test procedure

The test consists of two successive time periods with time duration of T1 and T2 respectively. During time duration T1, the UE shall not have any timing information of NR Cell 2.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

2. Set the parameters according to T1 in Table 16.6.1.10.5-1.

3. Set NR Cell 2 physical cell identity = (current NR cell 2 physical cell identity + 3) mod 1008 for current iteration of the test procedure loop.

4. SS shall transmit an *RRCReconfiguration* message to configure Event A3 triggered reporting and dedicated BWP-1, which contains NCD-SSB configuration, as specified in 16.6.1.10.4.3. RedCap-specific dedicated BWP-1 is the activated BWP. The SS transmits NCD-SSB on Cell 1 with an absolute frequency (in ARFCN value and aligned with channel raster) of

$$f_{\mathrm{NCDSSB}} = f_{\mathrm{pointA}} + \frac{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}} \cdot \left[\left(f_{\mathrm{CDSSB}} - f_{\mathrm{pointA}}\right) \cdot \frac{\Delta\mathrm{F}_{\mathrm{Global}}}{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}} \right] + \frac{N_{\mathrm{SC}}^{\mathrm{SSB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}}$$

where,

- f_{CDSSB} is the absolute frequency of CD-SSB (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- f_{pointA} is the absolute frequency of Point A (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- $\Delta\mathrm{F}_{\mathrm{Global}}$ is the granularity of the global frequency raster (in kHz) specified in 38.101-1 [2] clause 5.4.2.1;- $\mathrm{SCS}_{\mathrm{SSB}}$ is the subcarrier spacing of SSB (in kHz);
- $N_{\mathrm{SC}}^{\mathrm{RB}} = 12$, is the number of subcarriers in an RB;
- $N_{\mathrm{SC}}^{\mathrm{SSB}} = 240$, is the number of subcarriers in an SSB.

5. The UE shall transmit an *RRCReconfigurationComplete* message. T1 starts upon the SS receives the *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 16.6.1.10.5-1. T2 starts. The SS also transmits NCD-SSB on Cell 2 with an absolute frequency of f_{NCDSSB} calculated above.

7. The SS increases the number of successful tests by one if the UE transmits a *MeasurementReport* message triggered by event A3 satisfying the overall delay requirement specified in clause 16.6.1.10.5, otherwise the SS increases the number of failure tests by one.

8. After the SS receive the *MeasurementReport* message in step 7) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   or

   - switch the UE off.

9. Depending on the choice in step 8, the SS shall,

   - transmit in NR Cell 1 a *Paging* message including matched ng-5G-S-TMSI for the UE if an *RRCRelease* has been sent in step 8. If the paging fails, switches off and on the UE,

   or

   - switch on the UE if the UE is switched off in step 8.

10. Repeat step 1-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.6.1.10.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.6.1.10.4.3-1: Common Exception messages

Default Message Contents

Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with condition SSB Index and A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ and SSB Index Table H.3.1-8 with Condition SSB RLM

Table 16.6.1.10.4.3-2: *MeasObjectNR* (step 4, test procedure)

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR ::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR of NCD-SSB		
smtc1	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.4 RedCap	SMTC.4 RedCap	
}			

Table 16.6.1.10.4.3-3: *ServingCellConfig* (step 1, test procedure)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList	Not present		
firstActiveDownlinkBWP-Id	Not present		
uplinkConfig	Not present		
servingCellMO	Not present		
}			

Table 16.6.1.10.4.3-3A: *ServingCellConfig* (step 4, test procedure)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1]	BWP-Downlink	entry 1 Table 16.6.1.10.4.3-4	
}			
firstActiveDownlinkBWP-Id	1	Activate the RedCap-specific dedicated DL BWP	
uplinkConfig SEQUENCE {			
initialUplinkBWP	Not present		
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 16.6.1.10.4.3-5	
}			
firstActiveUplinkBWP-Id	1	Activate the RedCap-specific dedicated UL BWP	
pusch-ServingCellConfig	Not present		
}			
}			
servingCellMO	Not present		
}			

Table 16.6.1.10.4.3-4: *BWP-Downlink* (Table 16.6.1.10.4.3-3A)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to DLBWP.1.3 RedCap		
}			
}			
bwp-Dedicated SEQUENCE {			
nonCellDefiningSSB-r17 SEQUENCE {			
absoluteFrequencySSB-r17	ARFCN-ValueNR of NCD-SSB		
ssb-Periodicity-r17	ms80		
ssb-TimeOffset-r17	Not present		
}			
servingCellMO-r17	1	MeasObjectId associated with NCD-SSB	
}			
}			

Table 16.6.1.10.4.3-5: *BWP-Uplink* (Table 16.6.1.10.4.3-3A)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {	BWP-UplinkCommon		
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to ULBWP.1.3 RedCap		
}			
}			
}			

16.6.1.10.5 Test requirement

Table 16.6.1.10.4.1-3 and Table 16.6.1.10.5-1 define the primary level settings including test tolerances.

Table 16.6.1.10.5-1: NR Cell specific test parameters for SA intra-frequency event triggered reporting tests without gap under non-DRX

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
TDD configuration		N/A		N/A	
PDSCH RMC configuration		SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		CCR.1.1 FDD		N/A	
OCNG Patterns		OP.1		OP.1	
TRS Configuration		TRS.1.1 FDD		N/A	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
Active DL BWP configuration		DLBWP.1.3 RedCap Note 4		DLBWP.1.3 RedCap Note 4	
Active UL BWP configuration		ULBWP.1.3 RedCap Note 5		ULBWP.1.3 RedCap Note 5	
RLM-RS		SSB		SSB	
N_{oc} Note 2	dBm/SCS	-98			
N_{oc} Note 2	dBm/15 KHz	-98			

$\hat{E}_s/I_{ot}$	dB	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	-64.60	-62.25	-64.60	-62.25
Propagation Condition		AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dedicated DL BWP2 corresponding to NCD-SSB PRB index;
Note 5: The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.

The overall delay is measured from the beginning of time period T2 to the time that the SS receives the first *MeasurementReport* message triggered by event A3. It is allowed to be up to $2xTTI_{DCCH}$ higher than the measurement reporting delay specified in 38.133[6] clause 9.2B.4 due to the TTI insertion uncertainty of the measurement report in DCCH.

Then the overall delay shall be no larger than: $T_{identify_intra_with_index} + 2xTTI_{DCCH}$, where

- $T_{identify_intra_with_index}$ = 1240 ms, is the time for intra-frequency cell identification specified in 38.133 [6] clause 9.2B.5.1,
- TTI_{DCCH} = 1 ms.

Which gives a total of 1242 ms.

The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

16.6.1.11 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 1 Rx UE

16.6.1.11.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in 38.133 [6] clauses 9.2B.6.1 and 9.2B.6.2.

16.6.1.11.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 onwards and supporting CSI-RS-based RLM and BWP operation without bandwidth restriction.

16.6.1.11.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.11.

16.6.1.11.4 Test description

16.6.1.11.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.1.6.4.1 with following exceptions:

- Table 6.6.1.6.4.1-1 is replaced by Table 16.6.1.11.4.1-1.
- Table 6.6.1.6.4.1-2 is replaced by Table 16.6.1.11.4.1-2.

- Table 6.6.1.6.4.1-3 is replaced by Table 16.6.1.11.4.1-3.

Table 16.6.1.11.4.1-1: Supported test configurations

Configuration	Description
16.6.1.11-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.1.11-2	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.6.1.11.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.11.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.1.11.4.1-3: General test parameters

Parameter	Unit	Test config	Value	Comment
Active cell		1,2	Cell 1	
Neighbour cell		1,2	Cell 2	Cell to be identified.
RF Channel Number		1,2	1: Cell 1 and Cell 2	
Measurement gap type		1,2	Per-UE gaps	
Measurement gap repetition periodicity	ms	1,2	40	
Measurement gap length	ms	1,2	6	
Measurement gap offset	ms	1,2	39	
CD-SSB configuration		1,2	SSB.1 FR1	
SMTC configuration for CD-SSB		1,2	SMTC.2	
A3-Offset	dB	1,2	-4.5	
CP length		1,2	Normal	
Hysteresis	dB	1,2	0	
Time To Trigger	s	1,2	0	
Filter coefficient		1,2	0	L3 filtering is not used
DRX		1,2	N/A	OFF
Time offset between serving and neighbour cells		1,2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1
T1	s	1,2	5	
T2	s	1,2	5	

16.6.1.11.4.2 Test procedure

Same as the test procedure given in 6.6.1.6.4.2 with following exceptions:

- Step 6 in 6.6.1.6.4.2 is replaced by following step.

6. UE shall transmit a MeasurementReport message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1042 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

16.6.1.11.4.3 Message contents

Same as the message contents given in 6.6.1.6.4.3.

16.6.1.11.5 Test requirement

Same as the test requirement given in 6.6.1.6.5 with following exceptions:

- Table 6.6.1.6.5-1 is replaced by Table 16.6.1.11.5-1.
- The overall delay measured is expressed as:

  Overall delays measured = $T_{PSS/SSS_sync_intra_RedCap}$ + $T_{SSB_measurement_period_intra_RedCap}$ + $T_{SSB_time_index_intra_RedCap}$ + TTI insertion uncertainty

  - $T_{PSS/SSS_sync_intra_RedCap}$ = 600 ms
  - $T_{SSB_measurement_period_intra_RedCap}$= 200 ms
  - $T_{SSB_time_index_intra_RedCap}$ = 240 ms
  - TTI insertion uncertainty = 2 ms

  As a result, the overall delay measured shall be less than a total of 1042 ms.

Table 16.6.1.11.5-1: NR Cell specific test parameters

Parameter	Unit	Test config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2	N/A		N/A	
PDSCH RMC configuration		1,2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1,2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.1.2 FDD		N/A	
OCNG Patterns		1,2	OP.1		OP.1	
TRS Configuration		1,2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1,2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP2 configuration		1,2	DLBWP.1.2 RedCap		DLBWP.1.1	
Active UL BWP2 configuration		1,2	ULBWP.1.2 RedCap		ULBWP.1.1	
RLM-RS		1,2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,2	-98			
N_{oc} Note 2	dBm/15 KHz	1,2	-98			
$\hat{E}_s/I_{ot}$	dB	1,2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS	1,2	-94	-94	-Infinity	-94
Io	dBm/ 9.36 MHz	1,2	-64.60	-62.25	Specified in Cell 1 columns	
Propagation Condition		1,2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.6.1.12 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 2 Rx UE

16.6.1.12.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in 38.133 [6] clauses 9.2B.6.1 and 9.2B.6.2.

16.6.1.12.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 onwards and supporting CSI-RS-based RLM and BWP operation without bandwidth restriction.

16.6.1.12.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.1.0.1 and 16.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.1.12.

16.6.1.12.4 Test description

16.6.1.12.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.1.6.4.1 with following exceptions:

- Table 6.6.1.6.4.1-1 is replaced by Table 16.6.1.12.4.1-1.
- Table 6.6.1.6.4.1-2 is replaced by Table 16.6.1.12.4.1-2.
- Table 6.6.1.6.4.1-3 is replaced by Table 16.6.1.12.4.1-3.

Table 16.6.1.12.4.1-1: Supported test configurations

Configuration	Description
16.6.1.12-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.1.12-2	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 16.6.1.12.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.1.12.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

Table 16.6.1.12.4.1-3: General test parameters

Parameter	Unit	Test config	Value	Comment
Active cell		1,2	Cell 1	
Neighbour cell		1,2	Cell 2	Cell to be identified.
RF Channel Number		1,2	1: Cell 1 and Cell 2	
Measurement gap type		1,2	Per-UE gaps	

Measurement gap repetition periodicity	ms	1,2	40	
Measurement gap length	ms	1,2	6	
Measurement gap offset	ms	1,2	39	
SSB configuration		1,2	SSB.1 FR1	
SMTC configuration		1,2	SMTC.2	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0	
A3-Offset	dB	1,2	-4.5	
CP length		1,2	Normal	
Hysteresis	dB	1,2	0	
Time To Trigger	s	1,2	0	
Filter coefficient		1,2	0	L3 filtering is not used
DRX		1,2	N/A	OFF
Time offset between serving and neighbour cells		1,2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1
T1	s	1,2	5	
T2	s	1,2	5	

16.6.1.12.4.2 Test procedure

Same as the test procedure given in 6.6.1.6.4.2.

16.6.1.12.4.3 Message contents

Same as the message contents given in 6.6.1.6.4.3.

Table 16.6.1.12.4.3-1: *ServingCellConfig*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Downlink[1]	BWP-Downlink with condition BWP-Id1	DLBWP.1.2 RedCap configuration	
}			
firstActiveDownlinkBWP-Id	1	Active DL BWP-ID (BWP2)	BWP-Id1
defaultDownlinkBWP-Id	0	Initial BWP (BWP1)	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP-Id1	ULBWP.1.2 RedCap configuration	
}			
firstActiveUplinkBWP-Id	1	Active UL BWP-ID (BWP2)	BWP-Id1
}			
}			

16.6.1.12.5 Test requirement

Same as the test requirement given in 6.6.1.6.5 with following exceptions:

- Table 6.6.1.6.5-1 is replaced by Table 16.6.1.12.5-1.
- The overall delay measured is expressed as:

Overall delays measured = $T_{PSS/SSS_sync_intra_RedCap}$ + $T_{SSB_measurement_period_intra_RedCap}$ + $T_{SSB_time_index_intra_RedCap}$ + TTI insertion uncertainty

- $T_{PSS/SSS_sync_intra_RedCap}$ = 600 ms
- $T_{SSB_measurement_period_intra_RedCap}$ = 200 ms
- $T_{SSB_time_index_intra_RedCap}$ = 120 ms
- TTI insertion uncertainty = 2 ms

As a result, the overall delay measured shall be less than a total of 922 ms.

Table 16.6.1.12.5-1: NR Cell specific test parameters

Parameter	Unit	Test config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2	N/A		N/A	
PDSCH RMC configuration		1,2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1,2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.1.2 FDD		N/A	
OCNG Patterns		1,2	OP.1		OP.1	
TRS Configuration		1,2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1,2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2	DLBWP.1.2 RedCap		DLBWP.1.1	
Active UL BWP configuration		1,2	ULBWP.1.2 RedCap		ULBWP.1.1	
RLM-RS		1,2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,2	-98			
N_{oc} Note 2	dBm/15 KHz	1,2	-98			
$\hat{E}_s / I_{ot}$	dB	1,2	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1,2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS	1,2	-94	-94	-Infinity	-94
Io	dBm/ 9.36 MHz	1,2	-64.60	-62.25	Specified in Cell 1 columns	
Propagation Condition		1,2	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.6.2 Inter-frequency measurements for RedCap

16.6.2.0 Minimum conformance requirements

16.6.2.0.1 Minimum conformance requirements for inter-frequency event-triggered measurement with measurement gaps

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency

cell within $T_{identify_inter_with_index_RedCap}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index_RedCap}$.

$$T_{identify_inter_without_index_RedCap} = (T_{PSS/SSS_sync_inter_RedCap} + T_{SSB_measurement_period_inter_RedCap}) \text{ ms}$$

$$T_{identify_inter_with_index_RedCap} = (T_{PSS/SSS_sync_inter_RedCap} + T_{SSB_measurement_period_inter_RedCap} + T_{SSB_time_index_inter_RedCap}) \text{ ms}$$

Where:

$T_{PSS/SSS_sync_inter_RedCap}$: it is the time period used in PSS/SSS detection given in Table 16.6.2.0.1-1 and Table 16.6.2.0.1-2.

$T_{SSB_time_index_inter_RedCap}$: it is the time period used to acquire the index of the SSB being measured given in Table 16.6.2.0.1-3 and Table 16.6.2.0.1-4.

$T_{SSB_measurement_period_inter_RedCap}$: equal to a measurement period of SSB based measurement given in Table 16.6.2.0.1-5 and Table 16.6.2.0.1-6.

Editor's note: which power class to be used for RedCap depends on the RF session outcome.

$CSSF_{inter_RedCap}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap_RedCap,i}$ in clause 9.1A.5.2 for measurement conducted within measurement gaps.

Table 16.6.2.0.1-1: Time period for PSS/SSS detection (Frequency range FR1) for 2Rx RedCap UE

Condition NOTE1	$T_{PSS/SSS_sync_inter_RedCap}$
No DRX	$\text{Max}(600\text{ms}, 8 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$\text{Max}(600\text{ms}, \text{Ceil}(8*1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$8 \times \text{DRX cycle} \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 16.6.2.0.1-2: Time period for PSS/SSS detection (Frequency range FR1) for 1Rx RedCap UE

Condition NOTE1	$T_{PSS/SSS_sync_inter_RedCap}$
No DRX	$\text{Max}(600\text{ms}, 10 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$\text{Max}(600\text{ms}, \text{Ceil}(10*1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$10 \times \text{DRX cycle} \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 16.6.2.0.1-3: Time period for time index detection (Frequency range FR1) for 2Rx RedCap UE

Condition NOTE1	$T_{SSB_time_index_inter_RedCap}$
No DRX	$\text{Max}(120\text{ms}, 3 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$\text{Max}(120\text{ms}, \text{Ceil}(3 \times 1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$3 \times \text{DRX cycle} \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 16.6.2.0.1-4: Time period for time index detection (Frequency range FR1) for 1Rx RedCap UE

Condition NOTE1	$T_{SSB_time_index_inter_RedCap}$
No DRX	$\text{Max}(160\text{ms}, 6 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$\text{Max}(160\text{ms}, \text{Ceil}(6 \times 1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$6 \times \text{DRX cycle} \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

When measurement gaps are provided for inter frequency measurements, the RedCap UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in TS 38.133 [6] clauses 10.1A.4, 10.1A.5, 10.1A.8, 10.1A.9, 10.1A.12 and 10.1A.13, respectively, as shown in table 16.6.2.0.1-5 for 2Rx RedCap and in table 16.6.2.0.1-6 for 1Rx RedCap, respectively.

Table 16.6.2.0.1-5: Measurement period for inter-frequency measurements with gaps (Frequency FR1) for 2Rx RedCap UE

Condition NOTE1	$T_{SSB_measurement_period_inter_RedCap}$
No DRX	$Max(200ms, 8 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(8 \times 1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$8 \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 16.6.2.0.1-6: Measurement period for inter-frequency measurements with gaps (Frequency FR1) for 1Rx RedCap UE

Condition NOTE1	$T_{SSB_measurement_period_inter_RedCap}$
No DRX	$Max(400ms, 8 \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(400ms, ceil(1.5 \times 8) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$8 \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

For 2 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

For 1 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses10.1A.4.1, 10.1A.8.1 and 10.1A.12.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{identify_inter_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index_RedCap}$. Both $T_{identify_inter_without_index_RedCap}$ and $T_{identify_inter_with_index_RedCap}$ are defined in TS 38.133 [6] in clause 9.3B.4. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index_RedCap}$ or $T_{identify_intra_with_index_RedCap}$ as defined in TS 38.133 [6] in clause 9.2B.5.1 or clause 9.2B.6.2. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index_RedCap}$ or $T_{identify\ intra\ with\ index_RedCap}$ defined in TS 38.133 [6] in clause 9.2B.5.1 or clause 9.2B.6.2 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra_RedCap}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

16.6.2.0.2 Minimum conformance requirements for inter-frequency event-triggered measurements without measurement gaps

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index_RedCap}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index_RedCap}$. It is assumed that when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2, the following conditions are met:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned, and
- the timing of SSBs across serving cell and inter-frequency neighbor cells are aligned

$$T_{identify_inter_without_index_RedCap} = (T_{PSS/SSS_sync_inter_RedCap} + T_{SSB_measurement_period_inter_RedCap}) \text{ ms}$$

$$T_{identify_inter_with_index_RedCap} = (T_{PSS/SSS_sync_inter_RedCap} + T_{SSB_measurement_period_inter_RedCap} + T_{SSB_time_index_inter_RedCap}) \text{ ms}$$

Where:

$T_{PSS/SSS_sync_inter_RedCap}$: it is the time period used in PSS/SSS detection given in table 16.6.2.0.2-1, table 16.6.2.0.2-2.

$T_{SSB_time_index_inter_RedCap}$: it is the time period used to acquire the index of the SSB being measured given in table 16.6.2.0.2-3 and table 16.6.2.0.2-4.

$T_{SSB_measurement_period_inter_RedCap}$: equal to a measurement period of SSB based measurement given in table 16.6.2.0.2-5, table 16.6.2.0.2-6.

$CSSF_{inter_RedCap}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap_RedCap,i}$ in clause 9.1A.5.1 for measurement conducted outside measurement gaps, i.e. when interfrequency SMTC is fully non overlapping or partially overlapping with measurement gaps or according to $CSSF_{within_gap_RedCap,i}$ in clause 9.1A.5.2 for measurement conducted within measurement gaps, i.e. when interfrequency SMTC is fully overlapping with measurement gaps.

$M_{pss/sss_sync_inter_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{pss/sss_sync_inter_RedCap}$ = 40 samples. For a UE supporting FR2 power class 2, $M_{pss/sss_sync_inter_RedCap}$ = 24 samples. For a UE supporting FR2 power class 3, $M_{pss/sss_sync_inter_RedCap}$ = 24 samples. For a UE supporting FR2 power class 4, M_{pss/sss_sync_RedCap} = 24 samples. For a UE supporting FR2 power class 7, $M_{pss/sss_sync_inter_RedCap}$ = 24 samples.

$M_{SSB_index_inter_RedCap}$: For a UE supporting power class 1 or 5, $M_{SSB_index_inter_RedCap}$ = 40 samples. For a vehicle mounted UE supporting power class 2, $M_{pss/sss_sync_inter_RedCap}$ = 24 samples. For a UE supporting power class 3, $M_{SSB_index_inter_RedCap}$ = 24 samples. For a UE supporting power class 4, $M_{meas_period_inter_RedCap}$ = 24 samples. For a UE supporting power class 7, $M_{SSB_index_inter_RedCap}$ = 24 samples.

$M_{meas_period_inter_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{meas_period_inter_RedCap}$ =40 samples. For a vehicle mounted UE supporting FR2 power class 2, $M_{pss/sss_sync_inter_RedCap}$ =24 samples. For a UE supporting FR2 power class 3, $M_{meas_period_inter_RedCap}$ =24 samples. For a UE supporting FR2 power class 4, $M_{meas_period_inter_RedCap}$ = 24 samples. For a UE supporting FR2 power class 7, $M_{meas_period_inter_RedCap}$ =24 samples.

When interfrequency SMTC is fully non overlapping with measurement gaps or interfrequency SMTC is fully overlapping with MGs, Kp=1.

When interfrequency SMTC is partially overlapping with measurement gaps, Kp = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP.

For FR2,

$K_{layer1_measurement}$ =1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by inter-frequency SMTC occasions, or
- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by inter-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by *SSB-ToMeasure* and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

Table 16.6.2.0.2-1: Time period for PSS/SSS detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_inter_RedCap}$
No DRX	max(600ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 16.6.2.0.2-2: Time period for PSS/SSS detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_inter_RedCap}$
No DRX	max(600ms, ceil(7 x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x 7 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	ceil(7 x K_p) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 16.6.2.0.2-3: Time period for time index detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_time_index_inter_RedCap}$
No DRX	max(120ms, ceil(3 x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(120ms, ceil (1.5 x 3 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	Ceil(3 x K_p) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 16.6.2.0.2-4: Time period for time index detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_time_index_inter_RedCap}$
No DRX	max(160ms, ceil(6 x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(160ms, ceil (1.5 x 6 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	Ceil(6 x K_p) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

The RedCap UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1A.4, 10.1A.5, 10.1A.8, 10.1A.9, 10.1A.12 and 10.1A.13, respectively, as shown in table 16.6.2.0.2-5, for 2Rx RedCap and table 16.6.2.0.2-5 for 1Rx RedCap, if UE supports inter-frequency measurement without measurement gaps:

Table 16.6.2.0.2-5: Measurement period for inter-frequency measurements without gaps ((FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 16.6.2.0.2-6: Measurement period for inter-frequency measurements without gaps ((FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	max(200ms, ceil(5 x K_p) x SMTC period)[Note 1] x $CSSF_{inter_RedCap}$
DRX cycle≤ 320ms	max(200ms, ceil(1.5x 5 x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{inter_RedCap}$
DRX cycle>320ms	ceil(5 x K_p) x DRX cycle x $CSSF_{inter_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

16.6.2.1 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE

16.6.2.1.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in 38.133 [6] clause 9.3B.4.

16.6.2.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.1.

16.6.2.1.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.1.4.1-3 and Table 16.6.2.1.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.1.4.1-1.

Table 16.6.2.1.4.1-1: Supported test configurations

Configuration	Description
16.6.2.1-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.2.1-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.1-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.2.1-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.1.4.1-2.

Table 16.6.2.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.1.4.1-1.	

Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

1. The test parameters for PCell and neighbour cell are given in Table 16.6.2.1.4.1-3 below.

2. Message contents are defined in clause 16.6.2.1.4.3.

3. There two cells on two carriers specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 16.6.2.1.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3,4	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9		
A3-Offset	dB	Config 1,2,3,4	-6		
Hysteresis	dB	Config 1,2,3,4	0		
CP length		Config 1,2,3,4	Normal		
TimeToTrigger	s	Config 1,2,3,4	0		
Filter coefficient		Config 1,2,3,4	0		L3 filtering is not used
DRX		Config 1,2,3,4	DRX.1	DRX. 7	As specified in clause A.5
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3,4	5		
T2	s	Config 1,2,3,4	1.1	12	

Table 16.6.2.1.4.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]

drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table 16.6.2.1.4.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

16.6.2.1.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.2.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.2.4.2 is replaced by following steps.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1080 ms for Test 1, 11520 ms for Test 2, 1520 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.2.1.4.3 Message contents

Same as the message contents given in clause 6.6.2.2.4.3.

16.6.2.1.5 Test requirement

Table 16.6.2.1.4.1-3 and Table 16.6.2.1.5-1 define the primary level settings including test tolerances.

Table 16.6.2.1.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3,4	ULBWP.0.1		NA	
	Dedicated DL BWP		Config 1, 2, 3,4	DLBWP.1.1		NA	
	Dedicated UL BWP		Config 1, 2, 3,4	ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	

		Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.2		Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		NA	
		Config 2	SR.1.1 TDD		NA	
		Config 3	SR2.1 TDD		NA	
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		NA	
		Config 2	CR.1.1 TDD		NA	
		Config 3	CR.2.1 TDD		NA	
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		NA	
		Config 2	CCR.1.1 TDD		NA	
		Config 3	CCR.2.1 TDD		NA	
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.4A		Config 1,4	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SSB_RP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-61.66	-61.66	-67.11	-59.32
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 11520 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.2.2 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE

16.6.2.2.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in 38.133 [6] clause 9.3B.4.

16.6.2.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.6.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.2.

16.6.2.2.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.2.4.1-3 and Table 16.6.2.2.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.2.4.1-1.

Table 16.6.2.2.4.1-1: Supported test configurations

Configuration	Description
16.6.2.2-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.2.2-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.2-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode

16.6.2.2-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.2.4.1-2.

Table 16.6.2.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

1. The test parameters for PCell and neighbour cell are given in Table 16.6.2.2.4.1-3 below.
2. Message contents are defined in clause 16.6.2.2.4.3.
3. There two cells on two carriers specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 16.6.2.2.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3,4	1, 2		Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9		
A3-Offset	dB	Config 1,2,3,4	-6		
Hysteresis	dB	Config 1,2,3,4	0		
CP length		Config 1,2,3,4	Normal		
TimeToTrigger	s	Config 1,2,3,4	0		
Filter coefficient		Config 1,2,3,4	0		L3 filtering is not used
DRX		Config 1,2,3,4	DRX.1	DRX. 7	As specified in clause A.5
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.

T1	s	Config 1,2,3,4	5		
T2	s	Config 1,2,3,4	1.1	11	

Table 16.6.2.2.4.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table 16.6.2.2.4.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

16.6.2.2.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.2.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.2.4.2 is replaced by following steps.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1080 ms for Test 1, 10240 ms for Test 2, 1080 ms for Test 3 and 10240 ms for Test 4 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.2.2.4.3 Message contents

Same as the message contents given in clause 6.6.2.2.4.3.

16.6.2.2.5 Test requirement

Table 16.6.2.2.4.1-3 and Table 16.6.2.2.5-1 define the primary level settings including test tolerances.

Table 16.6.2.2.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4	1		2	
Duplex mode		Config 1	FDD			
		Config 2,3	TDD			
		Config 4	HD-FDD			
TDD configuration		Config 1	Not Applicable			
		Config 2	TDDConf.1.1			
		Config 3	TDDConf.2.1			
$BW_{channel}$	MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
		Config 3	20: $N_{RB,c}$ = 51			

BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3,4	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.2			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR.2.1 TDD		NA	
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD		NA	
			Config 2	CCR.1.1 TDD		NA	
			Config 3	CCR.2.1 TDD		NA	
SSB parameters			Config 1,4	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.4A			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1,2,3	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2	-98		-98	
			Config 3	-95		-95	
SSB_RP Note 3		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7

Io^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.2.3 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used for 1 Rx UE

16.6.2.3.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in 38.133 [6] clause 9.3B.4.

16.6.2.3.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.6.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.3.

16.6.2.3.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.3.4.1-3 and Table 16.6.2.3.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.3.4.1-1.

Table 16.6.2.3.4.1-1: Supported test configurations

Configuration	Description
16.6.2.3-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.2.3-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.3-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.2.3-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.3.4.1-2.

Table 16.6.2.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.2.3.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Parameter	**Unit**	**Test configuration**	**Value**		**Comment**
NR RF Channel Number		Config 1,2,3,4	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		As specified in clause 38.133 [6] 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9		
A3-Offset	dB	Config 1,2,3,4	-6		
Hysteresis	dB	Config 1,2,3,4	0		
CP length		Config 1,2,3,4	Normal		
TimeToTrigger	s	Config 1,2,3,4	0		
Filter coefficient		Config 1,2,3,4	0		L3 filtering is not used
DRX		Config 1,2,3,4	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.

		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3,4	5	
T2	s	Config 1,2,3,4	1.1	

16.6.2.3.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.2.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.2.4.2 is replaced by following steps.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 920 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.2.3.4.3 Message contents

Same as the message contents given in clause 6.6.2.1.4.3.

16.6.2.3.5 Test requirement

Table 16.6.2.3.4.1-3 and Table 16.6.2.3.5-1 define the primary level settings including test tolerances.

Table 16.6.2.3.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.2			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			

		Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD			
		Config 2	CCR.1.1 TDD			
		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1,2,4	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.4A		Config 1,4	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.72 MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1000 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

The UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.2.4 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used for 2 Rx UE

16.6.2.4.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in 38.133 [6] clause 9.3B.4.

16.6.2.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.6.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.4.

16.6.2.4.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.4.4.1-3 and Table 16.6.2.4.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.4.4.1-1.

Table 16.6.2.4.4.1-1: Supported test configurations

Configuration	Description
16.6.2.4-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.2.4-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.4-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.2.4-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.4.4.1-2.

Table 16.6.2.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.6.2.4.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment

NR RF Channel Number		Config 1,2,3,4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0	As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9	
A3-Offset	dB	Config 1,2,3,4	-6	
Hysteresis	dB	Config 1,2,3,4	0	
CP length		Config 1,2,3,4	Normal	
TimeToTrigger	s	Config 1,2,3,4	0	
Filter coefficient		Config 1,2,3,4	0	L3 filtering is not used
DRX		Config 1,2,3,4	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3,4	5	
T2	s	Config 1,2,3,4	1	

16.6.2.4.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.2.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.2.4.2 is replaced by following steps.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 920 ms Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.2.4.4.3 Message contents

Same as the message contents given in clause 6.6.2.1.4.3.

16.6.2.4.5 Test requirement

Table 16.6.2.4.4.1-3 and Table 16.6.2.4.5-1 define the primary level settings including test tolerances.

Table 16.6.2.4.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4	1		2	
Duplex mode		Config 1	FDD			
		Config 2,3	TDD			

			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.2			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR2.1 TDD		NA	
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD		NA	
			Config 2	CCR.1.1 TDD		NA	
			Config 3	CCR.2.1 TDD		NA	
SSB parameters			Config 1,2,4	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.4A			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz		-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2,4	-98		-98	
			Config 3	-95		-95	
SSB_RP Note 3		dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3,4	4	4	-Infinity	7

$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io[Note3]	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.72 MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSBRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with a confidence level of 95%.

The UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.2.5 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 1 Rx UE

16.6.2.5.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in 38.133 [6] clause 9.3B.4.

16.6.2.5.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.6.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.5.

16.6.2.5.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.5.4.1-3 and Table 16.6.2.5.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.5.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.5.4.1-1.

Table 16.6.2.5.4.1-1: Supported test configurations

Configuration	Description
16.6.2.5-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

16.6.2.5-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.5-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.2.5-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.5.4.1-2.

Table 16.6.2.5.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.2.5.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3,4	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9	
A3-Offset	dB	Config 1,2,3,4	-6	
Hysteresis	dB	Config 1,2,3,4	0	
CP length		Config 1,2,3,4	Normal	
TimeToTrigger	s	Config 1,2,3,4	0	
Filter coefficient		Config 1,2,3,4	0	L3 filtering is not used
DRX		Config 1,2,3,4	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3,4	5	
T2	s	Config 1,2,3,4	1.3	

16.6.2.5.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.2.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.2.4.2 is replaced by following steps.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1242 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.2.5.4.3 Message contents

Same as the message contents given in clause 6.6.2.1.4.3.

16.6.2.5.5 Test requirement

Table 16.6.2.5.4.1-3 and Table 16.6.2.5.5-1 define the primary level settings including test tolerances.

Table 16.6.2.5.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.2			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD			
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1,2,4	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.4A			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	

PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.72 MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Antenna Configuration		Config 1,2,3,4	1x1		1x1	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test is 2ms higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.2.6 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 2 Rx UE

16.6.2.6.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in 38.133 [6] clause 9.3B.4.

16.6.2.6.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.6.2.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.6.

16.6.2.6.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.6.4.1-3 and Table 16.6.2.6.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.6.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.6.4.1-1.

Table 16.6.2.6.4.1-1: Supported test configurations

Configuration	Description
16.6.2.6-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.2.6-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.6-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.2.6-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.6.4.1-2.

Table 16.6.2.6.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.2.6.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment

NR RF Channel Number		Config 1,2,3,4	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9	
A3-Offset	dB	Config 1,2,3,4	-6	
Hysteresis	dB	Config 1,2,3,4	0	
CP length		Config 1,2,3,4	Normal	
TimeToTrigger	s	Config 1,2,3,4	0	
Filter coefficient		Config 1,2,3,4	0	L3 filtering is not used
DRX		Config 1,2,3,4	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3,4	5	
T2	s	Config 1,2,3,4	1.1	

16.6.2.6.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.2.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.2.4.2 is replaced by following steps.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1042 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.2.6.4.3 Message contents

Same as the message contents given in clause 6.6.2.1.4.3.

16.6.2.6.5 Test requirement

Table 16.6.2.6.4.1-3 and Table 16.6.2.6.5-1 define the primary level settings including test tolerances.

Table 16.6.2.6.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4	1		2	
Duplex mode		Config 1	FDD			
		Config 2,3	TDD			

			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.2			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD			
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1,2,4	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.4A			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2,4	-98		-98	
			Config 3	-95		-95	
SSB_RP Note 3		dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3,4	4	4	-Infinity	7

$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io[Note3]	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36 MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Antenna Configuration		Config 1,2,3,4	1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test is 2ms higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.2.7 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 1 Rx UE

16.6.2.7.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in 38.133 [6] clause 9.3B.4.

16.6.2.7.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.6.2.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.7.

16.6.2.7.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.7.4.1-3 and Table 16.6.2.7.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.7.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.7.4.1-1.

Table 16.6.2.7.4.1-1: Supported test configurations

Configuration	Description

16.6.2.7-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.2.7-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.7-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.2.7-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.7.4.1-2.

Table 16.6.2.7.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.2.7.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3,4	1, 2		Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		As specified in 38.133 [6] clause 9.1A.2-1.
Measurement gap offset		Config 1,2,3,4	9		
A3-Offset	dB	Config 1,2,3,4	-6		
Hysteresis	dB	Config 1,2,3,4	0		
CP length		Config 1,2,3,4	Normal		
TimeToTrigger	s	Config 1,2,3,4	0		
Filter coefficient		Config 1,2,3,4	0		L3 filtering is not used
DRX		Config 1,2,3,4	DRX.1	DRX. 7	As specified in clause A.5
Time offset between serving and neighbour cells		Config 1,4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3 µs		Synchronous cells.
T1	s	Config 1,2,3,4	5		
T2	s	Config 1,2,3,4	1.5	16	

16.6.2.7.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.6.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.6.4.2 is replaced by following steps.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1440 ms for Test 1, 15360 ms for Test 2, , then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one.

16.6.2.7.4.3 Message contents

Same as the message contents given in clause 6.6.2.6.4.3.

16.6.2.7.5 Test requirement

Table 16.6.2.7.4.1-3 and Table 16.6.2.7.5-1 define the primary level settings including test tolerances.

Table 16.6.2.7.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.2			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD		-	
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1,4	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.4			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Antenna Configuration		Config 1,2,3,4	1x1		1x1	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1440 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 15360 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

In test 1 and 2 the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.2.8 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 2 Rx UE

16.6.2.8.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in 38.133 [6] clause 9.3B.4.

16.6.2.8.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.6.2.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.8.

16.6.2.8.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.8.4.1-3 and Table 16.6.2.8.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.8.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.8.4.1-1.

Table 16.6.2.8.4.1-1: Supported test configurations

Configuration	Description
16.6.2.8-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.2.8-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.8-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.2.8-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.8.4.1-2.

Table 16.6.2.8.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.6.2.8.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3,4	1, 2		Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		As specified in 38.133 [6] clause 9.1A.2-1.

Measurement gap offset		Config 1,2,3,4	9		
A3-Offset	dB	Config 1,2,3,4	-6		
Hysteresis	dB	Config 1,2,3,4	0		
CP length		Config 1,2,3,4	Normal		
TimeToTrigger	s	Config 1,2,3,4	0		
Filter coefficient		Config 1,2,3,4	0		L3 filtering is not used
DRX		Config 1,2,3,4	DRX.1	DRX. 7	As specified in clause A.5
Time offset between serving and neighbour cells		Config 1,4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3 µs		Synchronous cells.
T1	s	Config 1,2,3,4	5		
T2	s	Config 1,2,3,4	1.3	13.5	

16.6.2.8.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.6.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.6.4.2 is replaced by following steps.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1260ms for Test 1, 12160ms for Test 2, , then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.2.8.4.3 Message contents

Same as the message contents given in clause 6.6.2.6.4.3.

16.6.2.8.5 Test requirement

Table 16.6.2.8.4.1-3 and Table 16.6.2.8.5-1 define the primary level settings including test tolerances.

Table 16.6.2.8.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	

OCNG Patterns defined in A.2		Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		NA	
		Config 2	SR.1.1 TDD			
		Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2	CCR.1.1 TDD			
		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.4		Config 1,4	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Antenna Configuration		Config 1,2,3,4	1x2		1x2	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1260 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

In test 1 and 2 the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.2.9 NR SA FR1-FR1 Event triggered reporting tests with additional mandatory gap pattern for 1 Rx UE

Editor's Note:

- Antenna configuration missing in TS 38.133

16.6.2.9.1 Test purpose

To verify that the UE makes correct reporting of an event when mandatory gap pattern with 3ms MGL is configured. This test will partly verify the inter-frequency cell search requirements in 38.133 [6] clause 9.3B.4.

16.6.2.9.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards supporting *supportedGapPattern-NRonly-r16* and Gap Pattern 3.

16.6.2.9.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.9.

16.6.2.9.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.9.4.1-3 and Table 16.6.2.9.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.9.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.9.4.1-1.

Table 16.6.2.9.4.1-1: Supported test configurations

Configuration	Description
16.6.2.9-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.2.9-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.9-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.2.9-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.9.4.1-2.

Table 16.6.2.9.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.9.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.2.9.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1		
NR RF Channel Number		Config 1,2,3, 4	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3, 4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3, 4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3, 4	3		As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1, 4	12		
		Config 2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.5	1	

16.6.2.9.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.9.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.9.4.2 is replaced by following steps.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1440 ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.2.9.4.3 Message contents

Same as the message contents given in clause 6.6.2.9.4.3 with the following exceptions:

Table 16.6.2.9.4.3-1: Common Exception messages SA inter frequency event triggered reporting with additional mandatory gap pattern

Default Message Contents	
Specific message contents exceptions for Test Configuration 16.6.2.9-1	Table H.3.1-6 with Conditions gapUE, Pattern #3 and gap offset = 12
Specific message contents exceptions for Test Configuration 16.6.2.9-2	Table H.3.1-6 with Conditions gapUE, Pattern #3 and gap offset = 9
Specific message contents exceptions for Test Configuration 16.6.2.9-3	Table H.3.1-6 with Conditions gapUE, Pattern #3 and gap offset = 9
Specific message contents exceptions for Test Configuration 16.6.2.9-4	Table H.3.1-6 with Conditions gapUE, Pattern #3 and gap offset = 12

16.6.2.9.5 Test requirement

Table 16.6.2.9.4.1-3 and Table 16.6.2.9.5-1 define the primary level settings including test tolerances.

Table 16.6.2.9.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	

OCNG Patterns defined in A.2		Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		NA	
		Config 2	SR.1.1 TDD			
		Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2	CCR.1.1 TDD			
		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.4		Config 1,4	SMTC.1		SMTC.9	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36MHz	Config 3	-61.66	-61.66	-67.11	-59.32
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Antenna Configuration		Config 1,2,3,4	1x1		1x1	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1440 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

The UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.2.10 NR SA FR1-FR1 Event triggered reporting tests with additional mandatory gap pattern for 2 Rx UE

16.6.2.10.1 Test purpose

To verify that the UE makes correct reporting of an event when mandatory gap pattern with 3ms MGL is configured.

16.6.2.10.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting *supportedGapPattern-NRonly-r16* and Gap Pattern 3.

16.6.2.10.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.10.

16.6.2.10.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.10.4.1-3 and Table 16.6.2.10.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.10.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.10.4.1-1.

Table 16.6.2.10.4.1-1: Supported test configurations

Configuration	Description
16.6.2.10-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.2.10-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.10-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.2.10-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.10.4.1-2.

Table 16.6.2.10.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.10.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.6.2.10.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
NR RF Channel Number		Config 1,2,3, 4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3, 4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3, 4	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3, 4	3	As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1, 4	12	
		Config 2,3	9	
SMTC-SSB parameters		Config 1, 4	SSB.1 FR1	As specified in clause A.3.10.1
		Config 2	SSB.1 FR1	As specified in clause A.3.10.1
		Config 3	SSB.1 RedCap FR1	As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1.5	

16.6.2.10.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.9.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.9.4.2 is replaced by following step.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1280 ms for Test 1 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.2.10.4.3 Message contents

Same as the message contents given in clause 6.6.2.9.4.3 with the following exception:

Table 16.6.2.10.4.3-1: Common Exception messages SA inter frequency event triggered reporting with additional mandatory gap pattern

Default Message Contents	
Specific message contents exceptions for Test Configuration 16.6.2.10-1	Table H.3.1-6 with Conditions gapUE, Pattern #3 and gap offset = 12
Specific message contents exceptions for Test Configuration 16.6.2.10-2	Table H.3.1-6 with Conditions gapUE, Pattern #3 and gap offset = 9
Specific message contents exceptions for Test Configuration 16.6.2.10-3	Table H.3.1-6 with Conditions gapUE, Pattern #3 and gap offset = 9
Specific message contents exceptions for Test Configuration 16.6.2.10-4	Table H.3.1-6 with Conditions gapUE, Pattern #3 and gap offset = 12

16.6.2.10.5 Test requirement

Table 16.6.2.10.4.1-3 and Table 16.6.2.10.5-1 define the primary level settings including test tolerances.

Table 16.6.2.10.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.2			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			

RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2	CCR.1.1 TDD			
		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.4		Config 1,4	SMTC.1		SMTC.9	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz		-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36MHz	Config 3	-61.66	-61.66	-67.11	-59.32
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Antenna Configuration		Config 1,2,3,4	1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the

reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

The UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.2.11 NR SA FR1-FR1 Event triggered reporting tests for FR1 when DRX is used for 1 Rx UE

16.6.2.11.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency NR cell search without measurement gap requirements in 38.133 [6] clause 9.3B.7.

16.6.2.11.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx which supports interFrequencyMeas-Nogap-r16 from Release 17 onwards and long DRX cycle.

16.6.2.11.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.11.

16.6.2.11.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.11.4.1-3 and Table 16.6.2.11.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.11.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.11.4.1-1.

Table 16.6.2.11.4.1-1: Supported test configurations

Configuration	Description
16.6.2.11-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.2.11-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.11-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.2.11-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.11.4.1-2.

Table 16.6.2.11.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.11.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	

Exceptions to connection diagram		

Table 16.6.2.11.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3, 4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3, 4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3, 4	NR cell2	NR cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3, 4	-6	
Hysteresis	dB	Config 1,2,3, 4	0	
CP length		Config 1,2,3, 4	Normal	
TimeToTrigger	s	Config 1,2,3, 4	0	
Filter coefficient		Config 1,2,3, 4	0	L3 filtering is not used
DRX		Config 1,2,3, 4	DRX.1	As specified in clause A.5
Time offset between serving and neighbour cells		Config 1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3, 4	5	
T2	s	Config 1,2,3, 4	1.5	

Table 16.6.2.11.4.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

16.6.2.11.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.10.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.10.4.2 is replaced by following steps.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1282 ms for Test Configuration 1 and 4 and 922 ms for Test Configuration 2 and 3 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.2.11.4.3 Message contents

Same as the message contents given in clause 6.6.2.10.4.3.

16.6.2.11.5 Test requirement

Table 16.6.2.11.4.1-3 and Table 16.6.2.11.5-1 define the primary level settings including test tolerances.

Table 16.6.2.11.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1,4	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3, 4	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
CORESET Reference Channel			Config 1,4	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR2.1 TDD		NA	
SSB parameters			Config 1,4	SSB.1 FR1		SSB.1 FR1	
			Config 2	SSB.1 FR1		SSB.1 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.1 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.2	
			Config 2, 3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2, 4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} Note2	dBm/SCS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP Note 3	dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io Note3	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-61.66	-61.66	-67.11	-59.32
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test config 1 and 4, UE is required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%..

In test config 2 and 3, UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The actual overall delays measured in the test is 2ms higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.2.12 NR SA FR1-FR1 Event triggered reporting tests for FR1 when DRX is used for 2 Rx UE

16.6.2.12.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency NR cell search without measurement gap requirements in 38.133 [6] clause 9.3B.7.

16.6.2.12.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx which supports interFrequencyMeas-Nogap-r16 from Release 17 onwards and long DRX cycle.

16.6.2.12.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.2.12.

16.6.2.12.4 Test description

Two cells are deployed in the test, which are FR1 PCell (NR Cell 1) and a FR1 neighbour cell (NR Cell 2) on the different frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.2.12.4.1-3 and Table 16.6.2.12.5-1, respectively. In the measurement configuration a measurement object is configured for the frequency of the neighbour cell, and it indicates to the UE that event-triggered reporting with Event A3 is used.

16.6.2.12.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.2.12.4.1-1.

Table 16.6.2.12.4.1-1: Supported test configurations

Configuration	Description
16.6.2.12-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.2.12-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.2.12-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.2.12-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations. Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Configure the test requirement and the DUT according to the parameters in Table 16.6.2.12.4.1-2.

Table 16.6.2.12.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.2.12.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.6.2.12.4.1-3: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3, 4	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3, 4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.

Neighbour cell		Config 1,2,3, 4	NR cell2	NR cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3, 4	-6	
Hysteresis	dB	Config 1,2,3, 4	0	
CP length		Config 1,2,3, 4	Normal	
TimeToTrigger	s	Config 1,2,3, 4	0	
Filter coefficient		Config 1,2,3, 4	0	L3 filtering is not used
DRX		Config 1,2,3, 4	DRX.1	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3, 4	5	
T2	s	Config 1,2,3, 4	1.5	

Table 16.6.2.12.4.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

16.6.2.12.4.2 Test procedure

Same as the test procedure given in clause 6.6.2.10.4.2 with following exceptions:

- Step 6 in test procedure in clause 6.6.2.10.4.2 is replaced by following step.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than 1122 ms for Test Configuration 1 and 4 and 922 ms for Test Configuration 2 and 3then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.2.12.4.3 Message contents

Same as the message contents given in clause 6.6.2.10.4.3.

16.6.2.12.5 Test requirement

Table 16.6.2.12.4.1-3 and Table 16.6.2.12.5-1 define the primary level settings including test tolerances.

Table 16.6.2.12.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3	TDD			
TDD configuration		Config 1,4	Not Applicable			

			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
$BW_{channel}$		MHz	Config 1,2,4	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP BW		MHz	Config 1,2	10: $N_{RB,c}$ = 52			
			Config 3	20: $N_{RB,c}$ = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3, 4	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
CORESET Reference Channel			Config 1,4	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR2.1 TDD		NA	
SSB parameters			Config 1,4	SSB.1 FR1		SSB.1 FR1	
			Config 2	SSB.1 FR1		SSB.1 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.1 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.2	
			Config 2, 3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2, 4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS (Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} Note2		dBm/SCS	Config 1,2,4	-98		-98	
			Config 3	-95		-95	
SS-RSRP Note 3		dBm/SCS	Config 1,2,4	-94	-94	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3,4	4	4	-Infinity	7

Io[Note3]	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.2
	dBm/18.36MHz	Config 3	-61.66	-61.66	-67.11	-59.32
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

In test config 1 and 4, UE is required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1120 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

In test config 2 and 3, UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

NOTE: The actual overall delays measured in the test is 2ms higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.3 Inter-RAT measurements for RedCap

16.6.3.0 Minimum conformance requirements

16.6.3.0.1 Minimum conformance requirements for inter-RAT event triggered reporting to E-UTRAN FDD

The requirements are applicable for NR−E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN FDD cell is considered to be detectable when:

- For 2 Rx RedCap UE:
  - RSRP related conditions in the accuracy requirements in TS 38.133 [6] clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],
  - RSRQ related conditions in the accuracy requirements in TS 38.133 [6] clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],
  - RS-SINR related conditions in the accuracy requirements in TS 38.133 [6] clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [23].
- For 1 Rx RedCap UE:
  - RSRP related conditions in the accuracy requirements in TS 38.133 [6] clause 10.2A.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],
  - RSRQ related conditions in the accuracy requirements in TS 38.133 [6] clause 10.2A.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],

16.6.3.0.1.1 Requirements when no DRX is used

When the UE requires measurement gaps to identify and measure inter-RAT cells and an appropriate measurement gap pattern is scheduled, the UE shall be able to identify a new detectable FDD cell within $T_{Identify_RedCap,\ E\text{-}UTRAN\ FDD}$ according to the following expression:

$$T_{\text{Identify_RedCap,E-UTRAN FDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1_RedCap}}} \cdot \text{CSSF}_{\text{interRAT_RedCap}} \quad ms,$$

where:

$T_{BasicIdentify}$ = 480 ms,

T_{Inter1_RedCap} is defined in TS 38.133 [6] clause 9.4A.1,

$CSSF_{interRAT_RedCap} = CSSF_{within_gap_RedCap,i}$ is the scaling factor for the measured inter-RAT E-UTRA carrier *i* which is calculated as specified in TS 38.133 [6] clause 9.1A.5.2.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{Measure_RedCap,\ E\text{-}UTRAN\ FDD}$ defined in Table 16.6.3.0.1.1-1 and Table 16.6.3.0.1.1-2 for 2 Rx RedCap UE and 1 Rx RedCap UE, respectively.

Table 16.6.3.0.1.1-1: Measurement period and measurement bandwidth for 2Rx RedCap UE

Configuration	Physical Layer Measurement period: $T_{Measure_RedCap,\ E\text{-}UTRAN\ FDD}$ [ms]	Measurement bandwidth [RB]
0	480 x $CSSF_{interRAT_RedCap}$	6
1 (Note 1)	240 x $CSSF_{interRAT_RedCap}$	50
NOTE 1: This configuration is optional.		

Table 16.6.3.0.1.1-2: Measurement period and measurement bandwidth for 1Rx RedCap UE

Configuration	Physical Layer Measurement period: $T_{Measure_RedCap,\ E\text{-}UTRAN\ FDD}$ [ms]	Measurement bandwidth [RB]
0	960 x $CSSF_{interRAT_RedCap}$	6
1 (Note 1)	480 x $CSSF_{interRAT_RedCap}$	50
NOTE 1: This configuration is optional.		

The UE shall be capable of identifying and performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN FDD cells per E-UTRA FDD carrier frequency layer during each layer 1 measurement period, for up to 7 E-UTRA FDD carrier frequency layers.

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2.3. The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2.5.

For 1 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2A.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2A.3.

16.6.3.0.1.2 Requirements when DRX is used

When DRX is in use and measurement gaps are configured, the UE shall be able to identify a new detectable E-UTRAN FDD cell within $T_{Identify_RedCap,\ E\text{-}UTRAN\ FDD}$ specified in Table 16.6.3.0.1-1.

Table 16.6.3.0.1.2-1: Requirement to identify a newly detectable E-UTRAN FDD cell

DRX cycle length (s)	$T_{Identify_RedCap,\ E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)	
	Gap period = 40 ms, 20 ms	Gap period = 80 ms
≤0.16	Non-DRX requirements in clause 9.4A.2.2 apply	Non-DRX requirements in clause 9.4A.2.2 apply
0.256	5.12* $CSSF_{interRAT_RedCap}$ (20*$CSSF_{interRAT_RedCap}$)	7.68* $CSSF_{interRAT_RedCap}$ (30*$CSSF_{interRAT_RedCap}$)
0.32	6.4* $CSSF_{interRAT_RedCap}$ (20*$CSSF_{interRAT_RedCap}$)	7.68* $CSSF_{interRAT_RedCap}$ (24*$CSSF_{interRAT_RedCap}$)
0.32< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT_RedCap}$)	Note1 (20*$CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause 9.4A.2.2.		

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN FDD cells per E-UTRA FDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA FDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{measure_RedCap,\ E\text{-}UTRAN\ FDD}$ specified in Table 16.6.3.0.1-2 and Table 16.6.3.0.1-3.

Table 16.6.3.0.1.2-2: Requirement to measure E-UTRAN FDD cells for 2Rx RedCap UE

DRX cycle length (s)	$T_{measure_RedCap,\ E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)
≤0.08	Non-DRX requirements in clause 9.4A.2.2 apply
0.08< DRX-cycle ≤10.24	Note1 (5* $CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause 9.4A.2.2.	

Table 16.6.3.0.1.2-3: Requirement to measure E-UTRAN FDD cells for 1Rx RedCap UE

DRX cycle length (s)	$T_{measure_RedCap,\ E\text{-}UTRAN\ FDD}$ (s) (DRX cycles)
≤0.08	Non-DRX requirements in clause 9.4A.2.2 apply
0.08< DRX-cycle ≤10.24	Note1 (10* $CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause 9.4A.2.2.	

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3. The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2.5.

For 1 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2A.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2A.3.

16.6.3.0.1.3 Measurement reporting requirements for Event-Triggered Reporting

For 2 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

For 1 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP and RSRQ measurements contained in event-triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.2A.2 and 10.2A.3, respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify_RedCap,\ E\text{-}UTRAN\ FDD}$ defined in clauses 16.6.3.0.1.1 and 16.6.3.0.1.2 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{Identify_RedCap,\ E\text{-}UTRAN\ FDD}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [13], the event triggered measurement reporting delay shall be less than $T_{Measure_RedCap,\ E\text{-}UTRAN\ FDD}$ provided the timing to that cell has not changed more than ± 50 Ts while measurement gap has not been available and the L3 filter has not been used.

16.6.3.0.2 Minimum conformance requirements for inter-RAT event triggered reporting to E-UTRAN TDD

The requirements are applicable for NR−E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN TDD cell is considered to be detectable when:

- For 2 Rx RedCap UE:
  - RSRP related conditions in the accuracy requirements in TS 38.133 [6] clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],
  - RSRQ related conditions in the accuracy requirements in TS 38.133 [6] clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],

    RS-SINR related conditions in the accuracy requirements in TS 38.133 [6] clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [23].
- For 1 Rx RedCap UE:
  - RSRP related conditions in the accuracy requirements in TS 38.133 [6] clause 10.2A.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],
  - RSRQ related conditions in the accuracy requirements in TS 38.133 [6] clause 10.2A.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [23],

16.6.3.0.2.1 Requirements when no DRX is used

When the UE requires measurement gaps to identify and measure inter-RAT cells and an appropriate measurement gap pattern is scheduled, the UE shall be able to identify a new detectable TDD cell within $T_{Identify_RedCap,\ E\text{-}UTRAN\ TDD}$ according to the following expression:

- When configuration 0 or configuration 1 in Table 16.6.3.0.2.1-1 is applied,

$$T_{\text{Identify_RedCap,E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1_RedCap}}} \cdot \text{CSSF}_{\text{interRAT_RedCap}} \quad ms,$$

- When configuration 2 or configuration 3 in Table 16.6.3.0.2.1-1 is applied,

$$T_{\text{Identify_RedCap,E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1_RedCap}}} \cdot \text{CSSF}_{\text{interRAT_RedCap}} + 240 \cdot \text{CSSF}_{\text{interRAT_RedCap}} \quad ms,$$

where:

$T_{BasicIdentify}$ = 480 ms,

T_{Inter1_RedCap} is defined in TS 38.133 [6] clause 9.4A.1,

$CSSF_{interRAT_RedCap} = CSSF_{within_gap_RedCap,i}$ is the scaling factor for the measured inter-RAT E-UTRA carrier *i* which is calculated as specified in TS 38.133 [6] clause 9.1A.5.2.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ defined in Table 16.6.3.0.2.1-1 and Table 16.6.3.0.2.1-2 for 2 Rx RedCap UE and 1 Rx RedCap UE, respectively.

Table 16.6.3.0.2.1-1: $T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ for different configurations for 2Rx RedCap UE

Configuration	Measurement bandwidth (RB)	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		$T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ (ms)
		DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	480 x $CSSF_{interRAT_RedCap}$
1 (Note 1)	50	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	240 x $CSSF_{interRAT_RedCap}$
2	6	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	720 x $CSSF_{interRAT_RedCap}$
3 (Note 1)	50	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	480 x $CSSF_{interRAT_RedCap}$
NOTE 1: This configuration is optional.						

Table 16.6.3.0.2.1-2: $T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ for different configurations for 1Rx RedCap UE

Configuration	Measurement bandwidth (RB)	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		$T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ (ms)
		DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	960 x $CSSF_{interRAT_RedCap}$
1 (Note 1)	50	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	480 x $CSSF_{interRAT_RedCap}$
2	6	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	1440 x $CSSF_{interRAT_RedCap}$
3 (Note 1)	50	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	960 x $CSSF_{interRAT_RedCap}$
NOTE 1: This configuration is optional.						

The UE shall be capable of identifying and performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN TDD cells per E-UTRA TDD carrier frequency layer during each layer 1 measurement period, for up to 7 E-UTRA TDD carrier frequency layers.

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

- The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall

be as specified in TS 38.133 [6] clause 10.2.3. The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2.5.

For 1 Rx RedCap UE:

- The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2A.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2A.3.

16.6.3.0.2.2 Requirements when DRX is used

When DRX is in use and measurement gaps are configured, the UE shall be able to identify a new detectable E-UTRAN TDD cell within $T_{Identify_RedCap,\ E\text{-}UTRAN\ TDD}$ specified in Table 16.6.3.0.2.2-1.

Table 16.6.3.0.2.2-1: Requirement to identify a newly detectable E-UTRAN TDD cell

DRX cycle length (s)	$T_{Identify_RedCap,\ E\text{-}UTRAN\ TDD}$ (s) (DRX cycles)	
	Gap period = 40 ms, 20 ms	Gap period = 80 ms
≤0.16	Non-DRX requirements in clause 9.4A.3.2 apply	Non-DRX requirements in clause 9.4A.3.2 apply
0.256	5.12* $CSSF_{interRAT_RedCap}$ (20*$CSSF_{interRAT_RedCap}$)	7.68* $CSSF_{interRAT_RedCap}$ (30*$CSSF_{interRAT_RedCap}$)
0.32	6.4* $CSSF_{interRAT_RedCap}$ (20*$CSSF_{interRAT_RedCap}$)	7.68* $CSSF_{interRAT_RedCap}$ (24*$CSSF_{interRAT_RedCap}$)
0.32< DRX-cycle ≤10.24	Note1 (20*$CSSF_{interRAT_RedCap}$)	Note1 (20*$CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause 9.4A.3.2.		

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN TDD cells per E-UTRA TDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA TDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{measure_RedCap,\ E\text{-}UTRAN\ TDD}$ specified in Table 16.6.3.0.2.2-2 and Table 16.6.3.0.2.2-3 for 2 Rx RedCap UE and 1 Rx RedCap UE, respectively.

Table 16.6.3.0.2.2-2: Requirement to measure E-UTRAN TDD cells for 2Rx RedCap UE

DRX cycle length (s)	$T_{measure_RedCap,\ E\text{-}UTRAN\ TDD}$ (s) (DRX cycles)
≤0.08	Non-DRX Requirements in clause 9.4A.3.2 apply
0.128	For configuration 2 [Note3], non-DRX requirements in clause 9.4A.3.2 apply, Otherwise: Note1 (5*$CSSF_{interRAT_RedCap}$)
0.128<DRX-cycle≤10.24	Note1 (5*$CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause 9.4A.3.2. NOTE 3: See Table 16.6.3.0.2.1-1.	

Table 16.6.3.0.2.2-3: Requirement to measure E-UTRAN TDD cells for 1Rx RedCap UE

DRX cycle length (s)	$T_{measure_RedCap,\ E\text{-}UTRAN\ TDD}$ (s) (DRX cycles)
≤0.08	Non-DRX Requirements in clause 9.4A.3.2 apply
0.128	For configuration 2 [Note3], non-DRX requirements in clause 9.4A.3.2 apply, Otherwise: Note1 (5*$CSSF_{interRAT_RedCap}$)
0.128<DRX-cycle≤10.24	Note1 (10*$CSSF_{interRAT_RedCap}$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $CSSF_{interRAT_RedCap}$ is as defined in clause 9.4A.3.2. NOTE 3: See Table [9.4A.3.2-1].	

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

- The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2.3. The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2.5.

For 1 Rx RedCap UE:

- The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2A.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in TS 38.133 [6] clause 10.2A.3.

16.6.3.0.2.3 Measurement reporting requirements for Event-Triggered Reporting

For 2 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

For 1 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP and RSRQ measurements contained in event-triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.2A.2 and 10.2A.3, respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify_RedCap,\ E\text{-}UTRAN\ TDD}$ defined in clauses 16.6.3.0.2.1 and 16.6.3.0.2.2 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{Identify_RedCap,\ E\text{-}UTRAN\ TDD}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [13], the event triggered measurement reporting delay shall be less than $T_{Measure_RedCap,\ E\text{-}UTRAN\ TDD}$ provided the timing to that cell has not changed more than ± 50 Ts while measurement gap has not been available and the L3 filter has not been used.

16.6.3.1 NR - E-UTRA event-triggered reporting in non-DRX for 1 Rx UE

16.6.3.1.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the NR - E-UTRAN inter-RAT cell search requirements in 38.133 [6] clauses 9.4A.2 and 9.4A.3.

16.6.3.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.6.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.3.0.1 and 16.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.3.1.

16.6.3.1.4 Test description

Two cells are deployed in the test, Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.3.1.4.1-3, Table 16.6.3.1.5-1 and Table 16.6.3.1.5-2, respectively. In the measurement configuration a measurement object is configured

for the frequency of the PCell, and it indicates to the UE that event-triggered reporting with Event B2 is used. The test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

16.6.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.3.1.4.1-1.

Table 16.6.3.1.4.1-1: Supported test configurations

Configuration	Description
16.6.3.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.6.3.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.3.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.3.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.6.3.1-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.6.3.1-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
16.6.3.1-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
16.6.3.1-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 16.6.3.1.4.1-2.

Table 16.6.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

1. The test parameters for PCell and neighbour cell are given in Table 16.6.3.1.4.1-3 below.
2. Message contents are defined in clause 16.6.3.1.4.3.
3. There are two carriers and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 16.6.3.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables 16.6.3.1.5-1 and 16.6.3.1.5-12	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 1
Gap Pattern Id		0	As specified in TS 38.133 [6] Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-96 Note2	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2

Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table 16.6.3.1.5-1 Note 2: Includes test tolerance as detailed in Annex F.1.3.2			

16.6.3.1.4.2 Test procedure

Same as the test procedure given in 6.6.3.1.4.2 with following exceptions:

- Step 6 in 6.6.3.1.4.2 is replaced by following step.

6. UE shall transmit a *MeasurementReport* message triggered by Event B2. If the measurement reporting delay from the beginning of time period T2 is less than 3842ms the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement, then the number of failure tests is increased by one.

16.6.3.1.4.3 Message contents

Same as the message contents given in 6.6.3.1.4.3.

16.6.3.1.5 Test requirement

Tables 16.6.3.1.4.1-3, 16.6.3.1.5-1 and 16.6.3.1.5-2 define the primary level settings including test tolerances.

Table 16.6.3.1.5-1: NR PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode			1, 3 7, 8	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4, 7, 8	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52 (TDD)	
			3, 6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4, 7, 8	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.1.1	

OCNG pattern[Note1]		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration		1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 FR1	
SSB configuration		1, 2, 4, 5, 7, 8	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking		1, 4, 7, 8	TRS.1.1 FDD	
		2, 5	TRS.1.1 TDD	
		3, 6	TRS.1.2 TDD	
b2-Threshold1	dBm	1, 2, 4, 5, 7, 8	-95 [Note4]	
		3, 6	-92 [Note4]	
EPRE ratio of PSS to SSS	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5, 7, 8	-104	
		3, 6	-101	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	19.55	-1.55
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6, 7, 8	19.55	-1.55
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5, 7, 8	-84.45	-105.55
		3, 6	-81.45	-102.55
SSB_RP[Note3]	dBm/SCS	1, 2, 4, 5, 7, 8	-84.45	-105.55
		3, 6	-81.45	-102.55
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-56.45	-73.74
	dBm/18.36 MHz	3, 6	-53.52	-70.82
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x1	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Includes test tolerances as detailed in Annex F.1.3.2.

Table 16.6.3.1.5-2: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	

		4, 5, 6, 8	TDD	
TDD special subframe configuration[Note1]		4, 5, 6, 8	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	18.55
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	18.55
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-85.45
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-85.45
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-76.22+10log ($N_{RB,c}$ /50)	-57.61+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x1	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3840 ms from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to 2 ms higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.3.2 NR - E-UTRA event-triggered reporting in non-DRX for 2 Rx UE

16.6.3.2.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the NR - E-UTRAN inter-RAT cell search requirements in 38.133 [6] clauses 9.4A.2 and 9.4A.3.

16.6.3.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.6.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.3.0.1 and 16.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.3.2.

16.6.3.2.4 Test description

Two cells are deployed in the test, Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.3.2.4.1-3, Table 16.6.3.2.5-1 and Table 16.6.3.2.5-2, respectively. In the measurement configuration a measurement object is configured for the frequency of the PCell, and it indicates to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is used. The test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

16.6.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.3.2.4.1-1.

Table 16.6.3.2.4.1-1: Supported test configurations

Configuration	Description
16.6.3.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.6.3.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.3.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.3.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.6.3.2-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.6.3.2-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
16.6.3.2-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
16.6.3.2-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 16.6.3.2.4.1-2.

Table 16.6.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram			

1. The test parameters for PCell and neighbour cell are given in Table 16.6.3.2.4.1-3 below.

2. Message contents are defined in clause 16.6.3.2.4.3.

3. There are two carriers and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 16.6.3.2.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables 16.6.3.2.5-1 and 16.6.3.2.5-2.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 1
Gap Pattern Id		0	As specified in TS 38.133 [6] Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table 16.6.3.2.5-1			

16.6.3.2.4.2 Test procedure

Same as the test procedure given in 6.6.3.1.4.2 with following exceptions:

- Step 6 in 6.6.3.1.4.2 is replaced by following step.

6. UE shall transmit a *MeasurementReport* message triggered by Event B2. If the measurement reporting delay from the beginning of time period T2 is less than 3842 ms the number of successful tests is increased by one. If the UE fails to report the event within the measurement reporting delay requirement, then the number of failure tests is increased by one.

16.6.3.2.4.3 Message contents

Same as the message contents given in 6.6.3.1.4.3.

16.6.3.2.5 Test requirement

Tables 16.6.3.2.4.1-3, 16.6.3.2.5-1 and 16.6.3.2.5-2 define the primary level settings including test tolerances.

Table 16.6.3.2.5-1: NR PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode			1, 3, 7, 8	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4, 7, 8	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52(TDD)	
			3, 6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4, 7, 8	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 FR1	
SSB configuration			1, 2, 4, 5, 7, 8	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking			1, 4, 7, 8	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5, 7, 8	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5, 7, 8	-104	

		3, 6	-101	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	17.55	-1.55
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6, 7, 8	17.55	-1.55
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5, 7, 8	-86.45	-105.55
		3, 6	-83.45	-102.55
SSB_RP[Note3]	dBm/SCS	1, 2, 4, 5, 7, 8	-86.45	-105.55
		3, 6	-83.45	-102.55
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-58.42	-73.74
	dBm/38.16 MHz	3, 6	-55.50	-70.82
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.6.3.2.5-2: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration[Note1]		4, 5, 6, 8	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	

PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA Note3				
OCNG_RB Note3				
N_{oc} Note4	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	18.55
$\hat{E}_s/I_{ot}$ Note5	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	18.55
RSRP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-85.45
SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-85.3+TT
Io Note5	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-76.22+10log ($N_{RB,c}$ /50)	-57.61+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3840 ms from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to 2ms higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.3.3 NR - E-UTRA event-triggered reporting in DRX for 1 Rx UE

16.6.3.3.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the NR - E-UTRAN inter-RAT cell search requirements in 38.133 [6] clauses 9.4A.2 and 9.4A.3.

16.6.3.3.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.6.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.3.0.1 and 16.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.3.3.

16.6.3.3.4 Test description

Two cells are deployed in the test, Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.3.3.4.1-3, Table 16.6.3.3.5-1 and Table 16.6.3.3.5-2, respectively. In the measurement configuration a measurement object is configured for the frequency of the PCell, and it indicates to the UE that event-triggered reporting with Event B2 is used. The test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

16.6.3.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.3.3.4.1-1.

Table 16.6.3.3.4.1-1: Supported test configurations

Configuration	Description
16.6.3.3-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.6.3.3-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.3.3-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.3.3-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.6.3.3-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.6.3.3-6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
16.6.3.3-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
16.6.3.3-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 16.6.3.3.4.1-2.

Table 16.6.3.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.3.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

1. The test parameters for PCell and neighbour cell are given in Table 16.6.3.3.4.1-3 below.
2. Message contents are defined in clause 16.6.3.3.4.3.
3. There are two carriers and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 16.6.3.3.4.1-3: General test parameters

Parameter	Unit	Value		Comment
		Test 1	Test 2	
NR RF Channel Number		1		1 NR carrier frequency is used in the test
LTE RF Channel Number		2		1 LTE carrier frequency is used in the test

Channel Bandwidth	MHz	As specified in Tables 16.6.3.3.5-1 and 16.6.3.3.5-2.		
Active cell		Cell 1		Cell 1 is on RF channel number 1
Neighbour cell		Cell 2		Cell 2 is on RF channel number 2
Gap Pattern Id		0		As specified in TS 38.133 [6] Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP		Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP		Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-96 Note2		E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0		
TimeToTrigger	s	0		
Filter coefficient		0		L3 filtering is not used
DRX		DRX.1	DRX.7	DRX cycle configurations DRX.1 and DRX. 7 are defined in TS 38.133 Table A.3.3.1-1 and Table A.3.3.7-1 respectively.
T1	s	5		
T2	s	5	15	
Note 1: Values are defined in Table 16.6.3.3.5-1 Note 2: Includes test tolerance as detailed in Annex F.1.3.2				

16.6.3.3.4.2 Test procedure

Same as the test procedure given in 6.6.3.2.4.2 with following exceptions:

- Step 6 in 6.6.3.2.4.2 is replaced by following step.

6. UE shall transmit a MeasurementReport message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 3842 ms for Test 1 or less than 12802 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.3.3.4.3 Message contents

Same as the message contents given in 6.6.3.2.4.3.

16.6.3.3.5 Test requirement

Tables 16.6.3.3.4.1-3, 16.6.3.3.5-1 and 16.6.3.3.5-2 define the primary level settings including test tolerances.

Table 16.6.3.3.5-1: NR PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode			1, 3, 7, 8	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4, 7, 8	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52(TDD)	
			3, 6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	

			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4, 7, 8	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.1.1	
OCNG pattern[Note1]			1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 FR1	
SSB configuration			1, 2, 4, 5, 7, 8	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking			1, 4, 7, 8	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5, 7, 8	-95 [Note4]	
			3, 6	-92 [Note4]	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}[Note2]		dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
N_{oc}[Note2]		dBm/SCS	1, 2, 4, 5, 7, 8	-104	
			3, 6	-101	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6, 7, 8	19.55	-1.55
$\hat{E}_s/I_{ot}$[Note3]		dB	1, 2, 3, 4, 5, 6, 7, 8	19.55	-1.55
SS-RSRP[Note3]		dBm/SCS	1, 2, 4, 5, 7, 8	-84.45	-105.55
			3, 6	-81.45	-102.55
SSB_RP[Note3]		dBm/SCS	1, 2, 4, 5, 7, 8	-84.45	-105.55
			3, 6	-81.45	-102.55
Io[Note3]		dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-56.45	-73.74
		dBm/38.16 MHz	3, 6	-53.52	-70.82
Propagation condition			1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6, 7, 8	1x1	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Includes test tolerances as detailed in Annex F.1.3.2.

Table 16.6.3.3.5-2: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration[Note1]		4, 5, 6, 8	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	18.55

$\hat{E}_s/I_{ot}$ Note5	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	18.55
RSRP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-85.45
SCH_RP Note5	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-85.45
Io Note5	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-76.22+10log ($N_{RB,c}$ /50)	-57.61+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x1	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3840 ms from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 12800 ms from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to 2 ms higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.3.4 NR - E-UTRA event-triggered reporting in DRX for 2 Rx UE

16.6.3.4.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the NR - E-UTRAN inter-RAT cell search requirements in 38.133 [6] clauses 9.4A.2 and 9.4A.3.

16.6.3.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.6.3.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.3.0.1 and 16.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.3.4.

16.6.3.4.4 Test description

Two cells are deployed in the test, Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.3.4.4.1-3, Table 16.6.3.4.5-1 and Table 16.6.3.4.5-2, respectively. In the measurement configuration a measurement object is configured for the frequency of the PCell, and it indicates to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is used. The test consists of two

consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

16.6.3.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.3.4.4.1-1.

Table 16.6.3.4.4.1-1: Supported test configurations

Configuration	Description
16.6.3.4-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.6.3.4-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.3.4-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.3.4-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.6.3.4-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.6.3.4-6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
16.6.3.4-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
16.6.3.4-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 16.6.3.4.4.1-2.

Table 16.6.3.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.3.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram			

1. The test parameters for PCell and neighbour cell are given in Table 16.6.3.4.4.1-3 below.

2. Message contents are defined in clause 16.6.3.4.4.3.

3. There are two carriers and two cells specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 16.6.3.4.4.1-3: General test parameters

Parameter	Unit	Value		Comment
		Test 1	Test 2	
NR RF Channel Number		1		1 NR carrier frequency is used in the test
LTE RF Channel Number		1		1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables 16.6.3.4.5-1 and 16.6.3.4.5-2.		
Active cell		Cell 1		Cell 1 is on RF channel number 1
Neighbour cell		Cell 2		Cell 2 is on RF channel number 2
Gap Pattern Id		0		As specified in 38.133 [6] Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP		Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP		Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95		E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2

Hysteresis	dB	0		
TimeToTrigger	s	0		
Filter coefficient		0		L3 filtering is not used
DRX		DRX.1	DRX.7	DRX cycle configurations DRX.1 and DRX. 7 are defined in TS 38.133 Table A.3.3.1-1 and Table A.3.3.7-1 respectively.
T1	s	5		
T2	s	5	15	
Note 1: Values are defined in Table 16.6.3.4.5-1				

16.6.3.4.4.2 Test procedure

Same as the test procedure given in 6.6.3.2.4.2 with following exceptions:

- Step 6 in 6.6.3.2.4.2 is replaced by following step.

6. UE shall transmit a MeasurementReport message triggered by Event B2. If the overall delays measured from the beginning of time period T2 is less than 3842 ms for Test 1 or less than 12802 ms for Test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one.

16.6.3.4.4.3 Message contents

Same as the message contents given in 6.6.3.2.4.3.

16.6.3.4.5 Test requirement

Tables 16.6.3.4.4.1-3, 16.6.3.4.5-1 and 16.6.3.4.5-2 define the primary level settings including test tolerances.

Table 16.6.3.4.5-1: NR PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode			1, 3, 7, 8	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
$BW_{channel}$		MHz	1, 4, 7, 8	10: $N_{RB,c}$ = 52 (FDD)	
			2, 5	10: $N_{RB,c}$ = 52(TDD)	
			3, 6	20: $N_{RB,c}$ = 51 (TDD)	
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4, 7, 8	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.1.1	

OCNG pattern[Note1]		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration		1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 FR1	
SSB configuration		1, 2, 4, 5, 7, 8	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking		1, 4, 7, 8	TRS.1.1 FDD	
		2, 5	TRS.1.1 TDD	
		3, 6	TRS.1.2 TDD	
b2-Threshold1	dBm	1, 2, 4, 5, 7, 8	-96	
		3, 6	-93	
EPRE ratio of PSS to SSS	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}[Note2]	dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
N_{oc}[Note2]	dBm/SCS	1, 2, 4, 5, 7, 8	-104	
		3, 6	-101	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	17.55	-1.55
$\hat{E}_s/I_{ot}$[Note3]	dB	1, 2, 3, 4, 5, 6, 7, 8	17.55	-1.55
SS-RSRP[Note3]	dBm/SCS	1, 2, 4, 5, 7, 8	-86.45	-105.55
		3, 6	-83.45	-102.55
SSB_RP[Note3]	dBm/SCS	1, 2, 4, 5, 7, 8	-86.45	-105.55
		3, 6	-83.45	-102.55
Io[Note3]	dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-58.42	-73.74
	dBm/38.16 MHz	3, 6	-55.50	-70.82
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.6.3.4.5-2: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	

TDD special subframe configuration[Note1]		4, 5, 6, 8	6	
TDD uplink-downlink configuration[Note1]		4, 5, 6, 8	1	
$BW_{channel}$	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	18.55
$\hat{E}_s/I_{ot}$[Note5]	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	18.55+TT
RSRP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-85.45+TT
SCH_RP[Note5]	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-85.3+TT
Io[Note5]	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-76.22+10log ($N_{RB,c}$ /50) +TT	-57.61+10log ($N_{RB,c}$ /50)
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3840 ms from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 12800 ms from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

NOTE: The actual overall delays measured in the test may be up to 2ms higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

16.6.4 L1-RSRP measurement for beam reporting for RedCap

16.6.4.0 Minimum conformance requirements

16.6.4.0.1 General

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured CSI-RS, SSB or CSI-RS and SSB resources for L1-RSRP. The measurements shall be performed for PCell, on the resources configured for L1-RSRP measurements within the active BWP.

The UE shall be able to measure all CSI-RS resources and/or SSB resources of the *nzp-CSI-RS-ResourceSet* and/or *csi-SSB-ResourceSet* within the CSI-Resource*Config* settings configured for L1-RSRP for the active BWP, provided that the number of resources does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to TS 38.133 [6] clause 10.1A.14 for FR1, for 1 Rx RedCap, and TS 38.133 [6] clause 10.1.19 for FR1 and TS 38.133 [6] clause 10.1.20 for FR2 for 2 Rx RedCap, if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in TS 38.133 [6] clause 10.1A.14 for FR1, for 1 Rx RedCap, and TS 38.133 [6] clause 10.1.19 for FR1 and TS 38.133 [6] clause 10.1.20 for FR2 for 2 Rx RedCap. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in TS 38.133 [6] clause 10.1.6.

For 1 Rx RedCap, reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in TS 38.133 [6] clause 10.1A.14 for FR1.

For 2 Rx RedCap, reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

For 1 Rx RedCap, reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in TS 38.133 [6] clause 10.1A.14.

For 2 Rx Redcap, reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send aperiodic L1-RSRP measurement reports, if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

For FD-FDD and TDD RedCap UEs, there are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

For HD-FDD RedCap UE, scheduling restrictions apply for transmission on PUCCH/PUSCH/SRS during the CBD evaluation period, as CBD evaluation is prioritized over UL transmission. The CBD evaluation period equals the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ in case L1-RSRP measurement is performed on SSB as defined in clause 16.6.4.0.2, or $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ in case L1-RSRP measurement is performed on CSI-RS and/or SSB as defined in clause 16.6.4.0.3.

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- For FD-FDD and TDD RedCap UEs, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

- For HD-FDD RedCap UE, scheduling restrictions apply for transmission on PUCCH/PUSCH/SRS during the CBD evaluation period, as CBD evaluation is prioritized over UL transmission. The CBD evaluation period equals the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ in case L1-RSRP measurement is performed on SSB as defined in clause 16.6.4.0.2, or $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ in case L1-RSRP measurement is performed on CSI-RS and/or SSB as defined in clause 16.6.4.0.3.

The normative reference for this requirement is TS 38.133 [6] clause 9.5B.1, 9.5B.3 and 9.5B.6.

16.6.4.0.2 Minimum conformance requirements for SSB based L1-RSRP measurement for beam reporting

The requirements in this clause apply, provided:

- The SSB resources configured for L1-RSRP measurements are measurable.

An SSB resource configured for L1-RSRP shall be considered measurable when for each relevant SSB the following conditions are met:

For 1 Rx RedCap:

- L1-RSRP related side conditions given in 38.133 [6] clause 10.1A.14.1 for FR1, respectively, for a corresponding band,

- SSB_RP and SSB Ês/Iot according to 38.133 [6] Annex B.2.4.1 for a corresponding band.

For 2 Rx RedCap:

- L1-RSRP related side conditions given in 38.133 [6] clauses 10.1.19.1 and 10.1.20.1 for FR1 and FR2, respectively, for a corresponding band,

- SSB_RP and SSB Ês/Iot according to 38.133 [6] Annex B.2.4.1 for a corresponding band.

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_SSB}$ is defined in Table 16.6.4.0.2-1 for FR1 for 2 Rx RedCap, and Table 16.6.4.0.2-2 for FR1 for 1 Rx RedCap, where

- M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise.

For FR1,

- $P=\frac{1}{1-\frac{T_{SSB}}{MRGP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

Where:

- T_{SSB} = ssb-periodicityServingCell

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For an FR1 serving cell, longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 16.6.4.0.2-1: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ (FR1) for 2 Rx RedCap

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{SSB})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P)*max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	ceil(M*P)*T_{DRX}
Note: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

Table 16.6.4.0.2-2: Measurement period $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ (FR1) for 1 Rx RedCap

Configuration	$T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{SSB})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P)*max(T_{DRX},T_{SSB}))
DRX cycle > 320ms	ceil(M*P)*T_{DRX}
Note: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

For FR1, when the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
  - If UE supports simultaneousRxDataSSB-DiffNumerology, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
  - If UE does not support simultaneousRxDataSSB-DiffNumerology, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

The normative reference for this requirement is TS 38.133 [6] clauses 9.5B.2, 9.5B.4.1 and 9.5B.5.1.

16.6.4.0.3 Minimum conformance requirements for CSI-RS based L1-RSRP measurement for beam reporting

The requirements in this clause apply, provided:

- The CSI-RS resources configured for L1-RSRP measurements are measurable.

A CSI-RS resource configured for L1-RSRP shall be considered measurable when for each relevant CSI-RS the following conditions are met:

For 1 Rx RedCap:

- L1-RSRP related side conditions given in 38.133 [6] clauses 10.1A.14.2 for FR1, respectively, for a corresponding band,

- CSI-RS_RP and CSI-RS Ês/Iot according to 38.133 [6] Annex B.2.4.2 for a corresponding band.

For 2 Rx RedCap:

- L1-RSRP related side conditions given in 38.133 [6] clauses 10.1.19.2 and 10.1.20.2 for FR1 and FR2, respectively, for a corresponding band,

- CSI-RS_RP and CSI-RS Ês/Iot according to 38.133 [6] Annex B.2.4.2 for a corresponding band.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$.

The value of $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ is defined in Table 16.6.4.0.3-1 for FR1 for 2 Rx RedCap, and in Table 16.6.4.0.3-2 for 1 Rx RedCap, where

- For periodic CSI-RS resources, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise

- For aperiodic CSI-RS resources M=1

- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with

  - SSB for L1-RSRP measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=ceil(*maxNumberRxBeam* / $N_{res_per_set}$), where $N_{res_per_set}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured with QCL-TypeD for all resources in the resource set.

- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, N=1. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource one RS has QCL-TypeD with

  - SSB for L1-RSRP measurement, or

  - another CSI-RS in resource set configured with repetition ON.

- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, N=1. UE is not required to meet the accuracy requirements in 38.133 [6] clause 10.1.19.2 and 10.1.20.2 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured with QCL-TypeD for all resources in the resource set.

For FR1,

- $P=\frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and

- P=1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

Where:

T_{CSI-RS} = the periodicity of CSI-RS configured for L1-RSRP measurement

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet pervious conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For an FR1 serving cell, longer L1 RSRP measurement period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

Table 16.6.4.0.3-1: Measurement period $T_{L1-RSRP_Measurement_Period_CSI-RS_RedCap}$ (FR1) for 2 Rx RedCap

Configuration	$T_{L1-RSRP_Measurement_Period_CSI-RS_RedCap}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{CSI-RS})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P)*max(T_{DRX},T_{CSI-RS}))
DRX cycle > 320ms	ceil(M*P)*T_{DRX}
Note 1: T_{CSI-RS} is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

Table 16.6.4.0.3-2: Measurement period $T_{L1-RSRP_Measurement_Period_CSI-RS_RedCap}$ (FR1) for 1 Rx RedCap

Configuration	$T_{L1-RSRP_Measurement_Period_CSI-RS_RedCap}$ (ms)
non-DRX	max(T_{Report}, ceil(M*P)*T_{CSI-RS})
DRX cycle ≤ 320ms	max(T_{Report}, ceil(1.5*M*P)*max(T_{DRX},T_{CSI-RS}))
DRX cycle > 320ms	ceil(M*P)*T_{DRX}
Note 1: T_{CSI-RS} is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for L1-RSRP measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

The normative reference for this requirement is TS 38.133 [6] clauses 9.5B.2, 9.5B.4.2 and 9.5B.5.2.

16.6.4.1 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for 1 Rx UE

16.6.4.1.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in 38.133 [6] clause 9.5B.4.1.

16.6.4.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 onwards.

16.6.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.4.0.1 and 16.6.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.4.1.

16.6.4.1.4 Test description

16.6.4.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.4.1.4.1 with following exceptions:

- Table 6.6.4.1.4.1-1 is replaced by Table 16.6.4.1.4.1-1.
- Table 6.6.4.1.4.1-2 is replaced by Table 16.6.4.1.4.1-3.
- Table 6.6.4.1.4.1-3 is replaced by Table 16.6.4.1.4.1-2.

Table 16.6.4.1.4.1-1: Supported test configurations

Config	Description
16.6.4.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.4.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.4.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.4.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.6.4.1.4.1-2: Test Environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.4.1.4.1-3: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2,3		TDD
	4		HD-FDD

TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,2,4	MHz	10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,2,4		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		Off
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

16.6.4.1.4.2 Test procedure

Same as the test procedure given in clause 6.6.4.1.4.2 with following exceptions:

- Step 5 in test procedure given in clause 6.6.4.1.4.2 is replaced by following step.

5. The UE shall start sending valid L1-RSRP reports. The SS shall check following requirements:

   - R1: the UE shall start to transmit valid reports no later than 720 ms for configuration 1, 2, 4 and no later than 680 ms for configuration 3 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 (Table 16.6.4.1.5-2 for test configurations 1, 2, 4 and Table 16.6.4.1.5-3 for test configurations 3) and the relative L1-RSRP requirement for SSB#0 in Table 16.6.4.1.5-4. If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

- R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 16.6.4.1.5-2 for test configurations 1, 2, 4 and 5 and in Table 16.6.4.1.5-3 for test configurations 3 and 6 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

-R4: The DIFF RSRP value of SSB#0 reported by the UE is compared to the expected DIFF RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 16.6.4.1.5-4 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

16.6.4.1.4.3 Message contents

Same as the message contents given in clause 6.6.4.1.4.3.

16.6.4.1.5 Test requirement

Same as the test requirements given in clause 6.6.4.1.5 with following exceptions:

- Table 6.6.4.1.5-1 is replaced by Table 16.6.4.1.5-1.
- Table 6.6.4.1.5-2 is replaced by Table 16.6.4.1.5-2.
- Table 6.6.4.1.5-3 is replaced by Table 16.6.4.1.5-3.
- Table 6.6.4.1.5-4 is replaced by Table 16.6.4.1.5-4.

Table 16.6.4.1.5-1: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~4	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	6.5
SSB RSRP Note3	1,2.4	dBm/SSB SCS	-94.65	-94.65	-Infinity	-88.15
	3		-91.65	-91.65	-Infinity	-85.15
Io Note3	1,2.4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-59.32
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-56.39
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	6.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.6.4.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T2
Lowest reported value (SSB#1)	55
Highest reported value (SSB#1)	81

Table 16.6.4.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T2

Lowest reported value (SSB#1)	58
Highest reported value (SSB#1)	84

Table 16.6.4.1.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

	T2
Lowest DIFF RSRP reported (SSB#0)	0
Highest DIFF RSRP reported (SSB#0)	6

16.6.4.2 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for 2 Rx UE

16.6.4.2.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in 38.133 [6] clause 9.5B.4.1.

16.6.4.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 onwards.

16.6.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.4.0.1 and 16.6.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.4.2.

16.6.4.2.4 Test description

16.6.4.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.4.1.4.1 with following exceptions:

- Table 6.6.4.1.4.1-1 is replaced by Table 16.6.4.2.4.1-1.
- Table 6.6.4.1.4.1-2 is replaced by Table 16.6.4.2.4.1-3.
- Table 6.6.4.1.4.1-3 is replaced by Table 16.6.4.2.4.1-2.

Table 16.6.4.2.4.1-1: Supported test configurations

Config	Description
16.6.4.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.4.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.4.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.4.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.6.4.2.4.1-2: Test Environment parameters

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.	
Channel bandwidth	As specified by the test configuration selected from Table 4.6.3.1.4.1-1.	

Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.6.4.2.4.1-3: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2,3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,2,4	MHz	10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,2,4		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		Off
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

16.6.4.2.4.2 Test procedure

Same as the test procedure given in clause 6.6.4.1.4.2.

16.6.4.2.4.3 Message contents

Same as the message contents given in clause 6.6.4.1.4.3.

16.6.4.2.5 Test requirement

Same as the test requirements given in clause 6.6.4.1.5 with following exceptions:

- Table 6.6.4.1.5-1 is replaced by Table 16.6.4.2.5-1.

Table 16.6.4.2.5-1: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~4	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1,2.4	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.15
	3		-91.65	-91.65	-Infinity	-88.15
Io Note3	1,2.4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.59
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-58.67
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	3.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void

16.6.4.3 NR SA FR1 SSB based L1-RSRP measurement when DRX is used for 1 Rx UE

16.6.4.3.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in 38.133 [6] clause 9.5B.4.1.

16.6.4.3.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 onwards and supporting long DRX cycle.

16.6.4.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.4.0.1 and 16.6.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.4.3.

16.6.4.3.4 Test description

16.6.4.3.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.4.2.4.1 with following exceptions:

- Table 6.6.4.2.4.1-1 is replaced by Table 16.6.4.3.4.1-1.

- Table 6.6.4.2.4.1-2 is replaced by Table 16.6.4.3.4.1-3.
- Table 6.6.4.2.4.1-3 is replaced by Table 16.6.4.3.4.1-2.

Table 16.6.4.3.4.1-1: Supported test configurations

Config	Description
16.6.4.3-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.4.3-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.4.3-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.4.3-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.6.4.3.4.1-2: Test Environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.4.3.4.1-3: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2,3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,2,4	MHz	10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,2,4		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		DRX.3
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP

Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

16.6.4.3.4.2 Test procedure

Same as the test procedure given in clause 6.6.4.2.4.2 with following exceptions:

- Step 5 in test procedure given in clause 6.6.4.2.4.2 is replaced by following step.

5. The UE shall start sending valid L1-RSRP reports. The SS shall check following requirements:

   - R1: the UE shall start to transmit valid reports no later than 720 ms for configuration 1, 2, 4 and no later than 680 ms for configuration 3 from the beginning of time period T2. A valid report shall meet the absolute L1-RSRP requirement for SSB#1 (Table 16.6.4.3.5-2 for test configurations 1, 2, 4 and Table 16.6.4.3.5-3 for test configurations 3) and the relative L1-RSRP requirement for SSB#0 in Table 16.6.4.3.5-4. If the first valid report is received earlier than the specified time, the number of passed iterations for R1 is increased by one. Otherwise, the number of failed iterations for R1 is increased by one.

   - R2: the UE shall transmit reports every 80 slots until the end of time period T2. If the reports are received accordingly, the number of passed iterations for R2 is increased by one. Otherwise, the number of failed iterations for R2 is increased by one.

   - R3: The L1-RSRP value of SSB#1 reported by the UE is compared to the expected L1-RSRP value for SSB#1. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 16.6.4.3.5-2 for test configurations 1, 2, 4 and 5 and in Table 16.6.4.3.5-3 for test configurations 3 and 6 or the UE fails to report the measurement value for SSB#1, the number of failed iterations for R3 is increased by one. Otherwise, the number of passed iterations for R3 is increased by one.

   -R4: The DIFF RSRP value of SSB#0 reported by the UE is compared to the expected DIFF RSRP value. In all consecutive reports after the first valid value is received, if the resulting value is outside the limits in Table 16.6.4.3.5-4 or the UE fails to report the measurement value for SSB#0, the number of failed iterations for R4 is increased by one. Otherwise, the number of passed iterations for R4 is increased by one.

16.6.4.3.4.3 Message contents

Same as the message contents given in clause 6.6.4.2.4.3.

16.6.4.3.5 Test requirement

Same as the test requirements given in clause 6.6.4.2.5 with following exceptions:

- Table 6.6.4.2.5-1 is replaced by Table 16.6.4.3.5-1.
- Table 6.6.4.2.5-2 is replaced by Table 16.6.4.3.5-2.
- Table 6.6.4.2.5-3 is replaced by Table 16.6.4.3.5-3.
- Table 6.6.4.2.5-4 is replaced by Table 16.6.4.3.5-4.

Table 16.6.4.3.5-1: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~4	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~4	dB	0	0	-Infinity	6.5
SSB RSRP Note3	1,2.4	dBm/SSB SCS	-94.65	-94.65	-Infinity	-88.15
	3		-91.65	-91.65	-Infinity	-85.15
Io Note3	1,2.4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-59.32
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-56.39
$\hat{E}_s/N_{oc}$	1~4	dB	0	0	-Infinity	6.5

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.6.4.3.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T2
Lowest reported value (SSB#1)	55
Highest reported value (SSB#1)	81

Table 16.6.4.3.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T2
Lowest reported value (SSB#1)	58
Highest reported value (SSB#1)	84

Table 16.6.4.3.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

	T2
Lowest DIFF RSRP reported (SSB#0)	0
Highest DIFF RSRP reported (SSB#0)	6

16.6.4.4 NR SA FR1 SSB based L1-RSRP measurement when DRX is used for 2 Rx UE

16.6.4.4.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in 38.133 [6] clause 9.5B.4.1.

16.6.4.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from release 17 onwards and supporting long DRX cycle.

16.6.4.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.4.0.1 and 16.6.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.4.4.

16.6.4.4.4 Test description

16.6.4.4.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.4.2.4.1 with following exceptions:

- Table 6.6.4.2.4.1-1 is replaced by Table 16.6.4.4.4.1-1.
- Table 6.6.4.2.4.1-2 is replaced by Table 16.6.4.4.4.1-3.
- Table 6.6.4.2.4.1-3 is replaced by Table 16.6.4.4.4.1-2.

Table 16.6.4.4.4.1-1: Supported test configurations

Config	Description
16.6.4.4-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.4.4-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.4.4-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.4.4-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.6.4.4.4.1-2: Test Environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.2-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 4.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

Table 16.6.4.4.4.1-3: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2,3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
$BW_{channel}$	1,2,4	MHz	10: $N_{RB,c}$ = 52
	3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD

	3		CCR.2.1 TDD
SSB configuration	1,2,4		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		DRX.3
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

16.6.4.4.4.2 Test procedure

Same as the test procedure given in clause 6.6.4.2.4.2.

16.6.4.4.4.3 Message contents

Same as the message contents given in clause 6.6.4.2.4.3.

16.6.4.4.5 Test requirement

Same as the test requirements given in clause 6.6.4.2.5 with following exceptions:

- Table 6.6.4.2.5-1 is replaced by Table 16.6.4.4.5-1.

Table 16.6.4.4.5-1: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} Note2	1~4	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	3.5
SSB RSRP Note3	1,2.4	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.15
	3		-91.65	-91.65	-Infinity	-88.15
Io Note3	1,2.4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.59
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-58.67
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	3.5 Note 4
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

16.6.4.5 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for 1 Rx UE

16.6.4.5.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5B.4.2.

16.6.4.5.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.6.4.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.4.0.1 and 16.6.4.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.4.5.

16.6.4.5.4 Test description

16.6.4.5.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.4.3.4.1 with following exceptions:

- Table 6.6.4.3.4.1-1 is replaced by Table 16.6.4.5.4.1-1.
- Table 6.6.4.3.4.1-2 is replaced by Table 16.6.4.5.4.1-2.
- Table 6.6.4.3.4.1-3 is replaced by Table 16.6.4.5.4.1-3.

Table 16.6.4.5.4.1-1: Supported test configurations

Configuration	Description
16.6.4.5-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.4.5-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.4.5-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.4.5-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.6.4.5.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.4.5.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.4.5.4.1-3: General test parameters

Parameter		Unit	Value
SSB GSCN			freq1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		N/A
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2,4		SSB.3 FR1
	Config 3		SSB.2 Redcap FR1
CSI-RS configuration	Config 1,4		CSI-RS 1.3 FDD
	Config 2		CSI-RS 1.3 TDD
	Config 3		CSI-RS 2.3 TDD
OCNG Patterns			OP.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration			DLBWP.1.1 ULBWP.1.1
SMTC configuration			SMTC.1 RedCap
DRX configuration			Off
reportConfigType			aperiodic
reportQuantity			cri-RSRP
Number of reported RS			2
qcl-Info			SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList		slots	8
T1		s	5
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

16.6.4.5.4.2 Test procedure

Same as the test procedure given in clause 6.6.4.3.4.2.

16.6.4.5.4.3 Message contents

Same as the message contents given in clause 6.6.4.3.4.3.

16.6.4.5.5 Test requirement

Same as the test requirements given in clause 6.6.4.3.5 with following exceptions:

- Table 6.6.4.3.5-1 is replaced by Table 16.6.4.5.5-1.
- Table 6.6.4.3.5-2 is replaced by Table 16.6.4.5.5-2.
- Table 6.6.4.3.5-3 is replaced by Table 16.6.4.5.5-3.
- Table 6.6.4.3.5-4 is replaced by Table 16.6.4.5.5-4.

Table 16.6.4.5.5-1: Cell specific test parameters

Parameter		Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1		dBm/15kHz	-94.65	
N_{oc} Note1	Config 1,2,4	dBm/SCS	-94.65	
	Config 3		-91.65	
$\hat{E}_s/I_{ot}$		dB	0	3.5
CSI-RS RSRP Note2	Config 1,2,4	dBm/SSB SCS	-94.65	-88.15
	Config 3		-91.64	-85.14
Io Note2	Config 1,2,4	dBm/9.36 MHz	-63.69	-59.32
	Config 3	dBm/18.36 MHz	-60.76	-56.39
$\hat{E}_s/N_{oc}$		dB	0	6.5
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table 16.6.4.5.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2 and 4

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	55
Highest reported value (CSI-RS#1)	81

Table 16.6.4.5.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	58
Highest reported value (CSI-RS#1)	84

Table 16.6.4.5.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

	T1
Lowest DIFF RSRP reported (CSI-RS#0)	0
Highest DIFF RSRP reported (CSI-RS#0)	6

16.6.4.6 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for 2 Rx UE

16.6.4.6.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5B.4.2.

16.6.4.6.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.6.4.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.4.0.1 and 16.6.4.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.4.6.

16.6.4.6.4 Test description

16.6.4.6.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.4.3.4.1 with following exceptions:

- Table 6.6.4.3.4.1-1 is replaced by Table 16.6.4.6.4.1-1.
- Table 6.6.4.3.4.1-2 is replaced by Table 16.6.4.6.4.1-2.
- Table 6.6.4.3.4.1-3 is replaced by Table 16.6.4.6.4.1-3.

Table 16.6.4.6.4.1-1: Supported test configurations

Configuration	Description
16.6.4.6-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.4.6-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.4.6-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.4.6-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.6.4.6.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.4.6.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram			

Table 16.6.4.6.4.1-3: General test parameters

Parameter	Unit	Value
SSB GSCN		freq1

Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		N/A
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2,4		SSB.3 FR1
	Config 3		SSB.2 Redcap FR1
CSI-RS configuration	Config 1,4		CSI-RS 1.3 FDD
	Config 2		CSI-RS 1.3 TDD
	Config 3		CSI-RS 2.3 TDD
OCNG Patterns			OP.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration			DLBWP.1.1 ULBWP.1.1
SMTC configuration			SMTC.1 RedCap
DRX configuration			Off
reportConfigType			aperiodic
reportQuantity			cri-RSRP
Number of reported RS			2
qcl-Info			SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList		slots	8
T1		s	5
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

16.6.4.6.4.2 Test procedure

Same as the test procedure given in clause 6.6.4.3.4.2.

16.6.4.6.4.3 Message contents

Same as the message contents given in clause 6.6.4.3.4.3.

16.6.4.6.5 Test requirement

Same as the test requirements given in clause 6.6.4.3.5 with following exceptions:

- Table 6.6.4.3.5-1 is replaced by Table 16.6.4.6.5-1.

Table 16.6.4.6.5-1: Cell specific test parameters

Parameter		Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1		dBm/15kHz	-94.65	
N_{oc} Note1	Config 1,2,4	dBm/SCS	-94.65	
	Config 3		-91.65	
$\hat{E}_s / I_{ot}$		dB	0	3.5
CSI-RS RSRP Note2	Config 1,2,4	dBm/SSB SCS	-94.65	-91.15
	Config 3		-91.65	-88.14
Io Note2	Config 1,2,4	dBm/9.36 MHz	-63.69	-61.59
	Config 3	dBm/18.36 MHz	-60.77	-58.67
$\hat{E}_s / N_{oc}$		dB	0	3.5
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

16.6.4.7 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for 1 Rx UE

16.6.4.7.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5B.4.2.

16.6.4.7.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards supporting long DRX cycle.

16.6.4.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.4.0.1 and 16.6.4.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.4.7.

16.6.4.7.4 Test description

16.6.4.7.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.4.4.4.1 with following exceptions:

- Table 6.6.4.4.4.1-1 is replaced by Table 16.6.4.7.4.1-1.
- Table 6.6.4.4.4.1-2 is replaced by Table 16.6.4.7.4.1-2.
- Table 6.6.4.4.4.1-3 is replaced by Table 16.6.4.7.4.1-3.

Table 16.6.4.7.4.1-1: Supported test configurations

Configuration	Description
16.6.4.7-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

16.6.4.7-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.4.7-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.4.7-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.6.4.7.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.4.7.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

Table 16.6.4.7.4.1-3: General test parameters

Parameter		Unit	Value
SSB GSCN			freq1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		N/A
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2,4		SSB.3 FR1
	Config 3		SSB.2 Redcap FR1
CSI-RS configuration	Config 1,4		CSI-RS 1.3 FDD
	Config 2		CSI-RS 1.3 TDD
	Config 3		CSI-RS 2.3 TDD
OCNG Patterns			OP.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration			DLBWP.1.1 ULBWP.1.1
SMTC configuration			SMTC.1 RedCap
DRX configuration			DRX.3
reportConfigType			aperiodic
reportQuantity			cri-RSRP
Number of reported RS			2
qcl-Info			SSB#0 for resource#0

		SSB#1 for resource#1
reportSlotOffsetList	slots	8
T1	s	5
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH DMRS		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

16.6.4.7.4.2 Test procedure

Same as the test procedure given in clause 6.6.4.4.4.2.

16.6.4.7.4.3 Message contents

Same as the message contents given in clause 6.6.4.4.4.3.

16.6.4.7.5 Test requirement

Same as the test requirements given in clause 6.6.4.4.5 with following exceptions:

- Table 6.6.4.4.5-1 is replaced by Table 16.6.4.7.5-1.
- Table 6.6.4.4.5-2 is replaced by Table 16.6.4.7.5-2.
- Table 6.6.4.4.5-3 is replaced by Table 16.6.4.7.5-3.
- Table 6.6.4.4.5-4 is replaced by Table 16.6.4.7.5-4.

Table 16.6.4.7.5-1: Cell specific test parameters

Parameter		Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1		dBm/15kHz	-94.65	
N_{oc} Note1	Config 1,2,4	dBm/SCS	-94.65	
	Config 3		-91.65	
$\hat{E}_s / I_{ot}$		dB	0	3.5
CSI-RS RSRP Note2	Config 1,2,4	dBm/SSB SCS	-94.65	-88.15
	Config 3		-91.64	-85.15
Io Note2	Config 1,2,4	dBm/9.36 MHz	-63.69	-59.32
	Config 3	dBm/18.36 MHz	-60.76	-56.39
$\hat{E}_s / N_{oc}$		dB	0	0
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table 16.6.4.7.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	55
Highest reported value (CSI-RS#1)	81

Table 16.6.4.7.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3

Normal Conditions	T1
Lowest reported value (CSI-RS#1)	58
Highest reported value (CSI-RS#1)	84

Table 16.6.4.7.5-4: L1-RSRP relative accuracy requirements for the reported values for all test configurations

	T1
Lowest DIFF RSRP reported (CSI-RS#0)	0
Highest DIFF RSRP reported (CSI-RS#0)	6

16.6.4.8 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for 2 Rx UE

16.6.4.8.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5B.4.2.

16.6.4.8.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting long DRX cycle.

16.6.4.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.4.0.1 and 16.6.4.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.4.8.

16.6.4.8.4 Test description

16.6.4.8.4.1 Initial conditions

Same as the initial conditions given in clause 6.6.4.4.4.1 with following exceptions:

- Table 6.6.4.4.4.1-1 is replaced by Table 16.6.4.8.4.1-1.
- Table 6.6.4.4.4.1-2 is replaced by Table 16.6.4.8.4.1-2.
- Table 6.6.4.4.4.1-3 is replaced by Table 16.6.4.8.4.1-3.

Table 16.6.4.8.4.1-1: Supported test configurations

Configuration	Description
16.6.4.8-1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.4.8-2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.4.8-3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode

16.6.4.8-4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table 16.6.4.8.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.4.8.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram			

Table 16.6.4.8.4.1-3: General test parameters

Parameter		Unit	Value
SSB GSCN			freq1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		N/A
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52
	Config 3		20: $N_{RB,c}$ = 51
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2,4		SSB.3 FR1
	Config 3		SSB.2 Redcap FR1
CSI-RS configuration	Config 1,4		CSI-RS 1.3 FDD
	Config 2		CSI-RS 1.3 TDD
	Config 3		CSI-RS 2.3 TDD
OCNG Patterns			OP.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration			DLBWP.1.1 ULBWP.1.1
SMTC configuration			SMTC.1 RedCap
DRX configuration			DRX.3
reportConfigType			aperiodic
reportQuantity			cri-RSRP
Number of reported RS			2
qcl-Info			SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList		slots	8

T1	s	5
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH DMRS		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

16.6.4.8.4.2 Test procedure

Same as the test procedure given in clause 6.6.4.4.4.2.

16.6.4.8.4.3 Message contents

Same as the message contents given in clause 6.6.4.4.4.3.

16.6.4.8.5 Test requirement

Same as the test requirements given in clause 6.6.4.4.5 with following exceptions:

- Table 6.6.4.4.5-1 is replaced by Table 16.6.4.8.5-1.

Table 16.6.4.8.5-1: Cell specific test parameters

Parameter		Unit	CSI-RS#0	CSI-RS#1
N_{oc} Note1		dBm/15kHz	-94.65	
N_{oc} Note1	Config 1,2,4	dBm/SCS	-94.65	
	Config 3		-91.65	
$\hat{E}_s / I_{ot}$		dB	0	3.5
CSI-RS RSRP Note2	Config 1,2,4	dBm/SSB SCS	-94.65	-91.15
	Config 3		-91.65	-88.14
Io Note2	Config 1,2,4	dBm/9.36 MHz	-63.69	-61.59
	Config 3	dBm/18.36 MHz	-60.77	-58.67
$\hat{E}_s / N_{oc}$		dB	0	3.5
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

16.6.5 NR measurements with autonomous gaps for RedCap

16.6.5.0 Minimum conformance requirements

16.6.5.0.1 Minimum conformance requirements for NR SA FR1 intra-frequency CGI identification of NR neighbour cell in FR1 for 1 Rx UE

The requirements in this clause are specified for CGI identification of an NR target cell and are applicable for a UE in RRC_CONNECTED state and configured with SA operation mode.

The UE shall identify and report the CGI of a known NR target cell when requested by the network for the purpose of reportCGI. Only one cell is provided to the UE with *cellForWhichToReportCGI* for identifying the CGI. The UE may make autonomous gaps in both downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3 of TS 38.331 [13]. Note that a UE is not required to use autonomous gap if *useAutonomousGaps* is set to false. If autonomous gaps are used for measurement with the purpose of reportCGI, regardless of whether DRX is used or not, the UE shall be able to identify a new CGI of NR cell within:

$$T_{identify_CGI_redcap} = (T_{MIB_redcap} + T_{SIB1_redcap})\ ms$$

Where:

T_{MIB_redcap} is the time period used to acquire MIB message. $T_{MIB_redcap} = 6 * T_{SMTC}$ ms for target cell carrier frequency on FR1.

T_{SIB1_redcap} is the time period used to acquire SIB1 message. $T_{SIB1_redcap} = 12 * T_{RMSI\text{-}scheduling}$ ms.

Where T_{SMTC} is the SMTC periodicity configured for the target cell measurement, and $T_{RMSI\text{-}scheduling}$ is

- the periodicity with which the SIB1 is actually transmitted by the NR target cell when SSB and RMSI CORESET multiplexing pattern is 1
- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and T_{SMTC} when SSB and RMSI CORESET multiplexing pattern is 2 or 3.

The requirement for identifying the CGI of an NR cell within $T_{identify_CGI_redcap}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [13] is used.

Within the time $T_{identify_CGI_redcap}$, over which the UE identifies the CGI of an NR cell, the UE shall fulfil interruption requirements specified in,

- Clause [8.2.2.2.14] of TS 38.133 [6] if the UE is configured with SA operation mode.

In the requirement a cell is known if,

- During the last 5 seconds before the reception of the report CGI command:
  - The UE has sent a valid L3-RSRP measurement report with SSB index for the target cell and
- During MIB decoding at least reported SSBs remains detectable according to the cell identification conditions specified in clauses 9.2B or 9.3B of TS 38.133 [6], and
- During SIB1 decoding the SSB used for MIB decoding remains detectable according to the cell identification conditions specified in clauses 9.2B or 9.3B of TS 38.133 [6], and
- During MIB decoding, the SSB for MIB decoding remains detectable with SNR $\geqslant$-3dB
- During SIB1 decoding, the PDSCH for SIB1 decoding remains detectable with SNR $\geqslant$-3dB

The CGI reporting delay is defined as the time between a command that will trigger a CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI_redcap}$ plus RRC procedure delay defined in clause 12 in TS 38.331 [13].

When a RedCap UE is identifying CGI of an NR cell with autonomous gaps, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on PCell for the following slots:

- with up to K1 interruptions with interrupted slots up to X1 specified in Table 16.6.5.0.1-1 for each interruption during MIB decoding time period T_{MIB_redcap} (ms).
- with up to L1 interruptions with interrupted slots up to Y1 specified in Table 16.6.5.0.1-1 during SIB1 decoding time period T_{SIB1_redcap} (ms) for SSB and CORESET for RMSI scheduling multiplexing patterns 1.

- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 16.6.5.0.1-1 during SIB1 decoding time period T_{SIB1_redcap} (ms) for SSB and CORESET for RMSI scheduling multiplexing patterns 2 and 3.

Where:

- K1 = 6 for the target cell carrier frequency on FR1, and
- L1 = T_{SIB1_redcap} /20 and
- L2 = T_{SIB1_redcap} /T_{SMTC}, where T_{SMTC} is the periodicity of the SMTC occasion configured for the target cell carrier.

Table 16.6.5.0.1-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19
3	0.125	48	49	37

The normative reference for this requirement is TS 38.133 [6] clause 9.11A.

16.6.5.0.2 Minimum conformance requirements for NR SA FR1 intra-frequency CGI identification of NR neighbour cell in FR1 for 2 Rx UE

Same as clause 16.6.5.0.1 with the following exception:

$$T_{SIB1_redcap} = 6 * T_{RMSI\text{-}scheduling} \text{ ms}$$

The normative reference for this requirement is TS 38.133 [6] clause 9.11A.

16.6.5.0.3 Minimum conformance requirements for CGI identification of an E-UTRA cell with autonomous gaps

The requirements in this clause apply when the 1Rx RedCap UE or 2Rx RedCap UE is configured with standalone NR. The UE shall identify and report the CGI when requested by an NR PCell for the purpose 'reportCGI'. The UE may make autonomous gaps in downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3.1 in TS 38.331 [13].

For 2Rx RedCap UE: If autonomous gaps are used for measurement with the purpose of 'reportCGI', the UE shall be able to identify a new CGI of E-UTRA cell within$T_{identify_CGI_RedCap,\ E\text{-}UTRAN}$ = 150 ms.

For 1Rx RedCap UE: If autonomous gaps are used for measurement with the purpose of 'reportCGI', the UE shall be able to identify a new CGI of E-UTRA cell within $T_{identify_CGI_RedCap,\ E\text{-}UTRAN}$ = 190 ms.

This is the maximum allowed time for the UE to identify a new CGI of an E-UTRA cell, provided that the E-UTRA cell has been already identified by the UE.

A cell shall be considered identifiable following conditions are fulfilled:

- RSRP related side conditions given in Clause 9.1 in TS 36.133 [23] are fulfilled for a corresponding Band,
- SCH_RP and SCH Ês/Iot according to Annex B.2.2 in TS 36.133 [23] for a corresponding Band

The MIB of an E-UTRA cell whose CGI is identified shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to TS 36.101 [27].

The requirement for identifying a new CGI of an E-UTRA cell within $T_{identify_CGI_RedCap,\ E\text{-}UTRAN}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [13] is used.

The E-UTRA CGI reporting delay is defined as the time between a command that will trigger an E-UTRA CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes

that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI_RedCap,\ E\text{-}UTRAN}$ plus RRC procedure delay defined in clause 12 in TS 38.331 [13], and an additional 30ms margin.

When a UE is identifying CGI of an E-UTRA FDD cell or E-UTRA TDD cell with autonomous gaps, within time period $T_{identify_CGI_RedCap,\ E\text{-}UTRA}$ specified in this clause, the UE shall be able to transmit at least the number of ACK/NACKs specified in Table 16.6.5.0.3-1 on PCell in the frequency range where autonomous gaps are used, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured.

Table 16.6.5.0.3-1: Minimum number of ACK/NACKs transmitted by the UE during $T_{identify_CGI_RedCap,\ E\text{-}UTRAN}$

Minimum number of transmitted ACK/NACKs	SCS	
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
28	TDD Note 1	15 kHz
81	TDD Note 1	30 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [2].		

The normative reference for this requirement is TS 38.133 [6] clauses 9.4A.4.

16.6.5.1 NR SA FR1 CGI identification of NR neighbour cell for 1 Rx UE

16.6.5.1.1 Test Purpose

The purpose of this test is to verify that the UE makes correct reporting of intra-frequency CGI identification of an NR neighbour cell in FR1 with autonomous gaps. This test shall partly verify the measurement requirements in clause 9.11A of TS 38.133 [6].

16.6.5.1.2 Test Applicability

This test applies to all types of NR RedCap UE with 1Rx from release 17 onwards and supporting acquisition of CGI from neighbour NR cell using autonomous gap.

16.6.5.1.3 Minimum Conformance Requirements

The minimum conformance requirements are specified in clause 16.6.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.5.1.

16.6.5.1.4 Test Description

16.6.5.1.4.1 Initial conditions

This test can be run in the configuration defined in Table 16.6.5.1.4.1-1.

Table 16.6.5.1.4.1-1: Supported test configurations

Test Case ID	Test Config Index	Description
16.6.5.1-1	1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.5.1-2	2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.5.1-3	3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.5.1-4	4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.6.5.1.4.1-2.

Table 16.6.5.1.4.1-2: Test Environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration from Table 16.6.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 16.6.5.1.4.1-3.
2. Message contents are defined in clause 16.6.5.1.4.3.
3. There are two cells: Cell 1 and Cell 2 specified in the test. Cell 1 is the FR1 PCell and Cell 2 is an FR1 neighbour cell on the same frequency as the PCell. The Cell 1 and Cell 2 are configured according to the settings in Annex C.1.1 and C.1.2.

Table 16.6.5.1.4.1-3: General test parameters for SA intra-frequency CGI identification of NR neighbour cell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
SSB configuration		1, 4	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX		1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.

		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
T3	s	1, 2, 3, 4	5	

16.6.5.1.4.2 Test procedure

The test consists of two cells: Cell 1 and Cell 2. Cell 1 is the FR1 PCell and Cell 2 is an FR1 neighbour cell on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 16.6.5.1.4.1-3 and Table 16.6.5.1.5-1, respectively. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 16.6.5.1.5-1. T1 starts.

3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for one iteration of the test procedure loop.

4. The SS shall switch the power setting from T1 to T2 as specified in Table 16.6.5.1.5-1. T2 starts.

5. SS shall transmit an *RRCReconfiguration* message to configure the measurement object for the frequency of the serving cell and to indicate the UE that event-triggered reporting with Event A3 is used.

6. The UE shall transmit *RRCReconfigurationComplete* message.

7. UE shall transmit a *MeasurementReport* message triggered by Event A3.

8. After the SS receives the *MeasurementReport* message in step 6, the SS shall transmit *RRCReconfiguration* message triggering CGI identification and configuring *reportCGI* and *useAutonomousGaps* IEs set to TRUE.

9. T3 starts when the last TTI containing the above RRC message implying CGI identification is sent to the UE.

10. The UE shall transmit *RRCReconfigurationComplete* message.

11. The SS verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell during T3 until a measurement report with CGI is sent. If the UE sends a measurement report containing the CGI of Cell 2 within 372 ms from the start of time period T3, then the number of successful tests is increased by one otherwise the number of failure tests is increased by one.

12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.6.5.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.6.5.1.4.3-1: Common Exception messages for NR SA FR1 intra-frequency CGI identification of NR neighbour cell in FR1 for 1 Rx UE

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 Table H.3.1-4 with condition SSB Index and A3-offset = -4.5dB Table H.3.1-5 Table H.3.1-7 with condition INTRA-FREQ and SSB Index Table H.3.1-8 with condition SSB RLM Table 4.6.3-142 of TS 38.508-1 [14] with condition CGI and AutoGaps

16.6.5.1.5 Test Requirements

Tables 16.6.5.1.4.1-3 and 16.6.5.1.5-1 define the general parameters and cell specific parameters for this test.

Table 16.6.5.1.5-1: NR Cell specific test parameters for SA intra-frequency CGI identification of NR neighbour cell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS Configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.67	-59.32	-61.67	-59.32
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send a measurement report containing the CGI of cell 2 within 372 ms from the start of time period T3.

Test requirement = RRC Procedure delay + $T_{identify_CGI_redcap}$ + reporting delay = 10 + 360 + 2ms from the start of T3= 372 ms, allow 375ms.

The UE shall be scheduled continuously throughout the test. From the start of T3 until 375 ms, the interruption on Pcell shall not be more than the values specified for SA in TS 38.133 [6] clause 9.11A.

The rate of correct events observed during repeated tests shall be at least 90%.

16.6.5.2 NR SA FR1 CGI identification of NR neighbour cell for 2 Rx UE

16.6.5.2.1 Test Purpose

The purpose of this test is to verify that the UE makes correct reporting of intra-frequency CGI identification of an NR neighbour cell in FR1 with autonomous gaps. This test shall partly verify the measurement requirements in clause 9.11A of TS 38.133 [6].

16.6.5.2.2 Test Applicability

This test applies to all types of NR RedCap UE with 2 Rx from release 17 onwards and supporting acquisition of CGI from neighbour NR cell using autonomous gap.

16.6.5.2.3 Minimum Conformance Requirements

The minimum conformance requirements are specified in clause 16.6.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.5.2.

16.6.5.2.4 Test Description

16.6.5.2.4.1 Initial conditions

This test can be run in the configuration defined in Table 16.6.5.2.4.1-1.

Table 16.6.5.2.4.1-1: Supported test configurations

Test Case ID	Test Config Index	Description
16.6.5.2-1	1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.6.5.2-2	2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.6.5.2-3	3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.6.5.2-4	4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 16.6.5.2.4.1-2.

Table 16.6.5.2.4.1-2: Test Environment parameters

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration from Table 16.6.5.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 16.6.5.2.4.1-3.

2. Message contents are defined in clause 16.6.5.2.4.3.

3. There are two cells: Cell 1 and Cell 2 specified in the test. Cell 1 is the FR1 PCell and Cell 2 is an FR1 neighbour cell on the same frequency as the PCell. The Cell 1 and Cell 2 are configured according to the settings in Annex C.1.1 and C.1.2.

Table 16.6.5.2.4.1-3: General test parameters for SA intra-frequency CGI identification of NR neighbour cell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
SSB configuration		1, 4	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX		1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs	Synchronous cells
		3	3 μs	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
T3	s	1, 2, 3, 4	5	

16.6.5.2.4.2 Test procedure

Same as in clause 16.6.5.1.4.2.

16.6.5.2.4.3 Message contents

Same as in clause 16.6.5.1.4.3.

16.6.5.2.5 Test Requirements

Tables 16.6.5.2.4.1-3 and 16.6.5.2.5-1 define the general parameters and cell specific parameters for this test.

Table 16.6.5.2.5-1: NR Cell specific test parameters for SA intra-frequency CGI identification of NR neighbour cell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	

Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS Configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
IInitial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s / I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/18.36 MHz	3	-61.67	-59.32	-61.67	-59.32
Propagation Condition		1, 2, 3, 4	AWGN			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall send a measurement report containing the CGI of cell 2 within 255 ms from the start of time period T3.

Test requirement = RRC Procedure delay + $T_{identify_CGI}$ + reporting delay = 10 + 240 + 2ms from the start of T3 = 252 ms, allow 255 ms.

The UE shall be scheduled continuously throughout the test. From the start of T3 until 255 ms, the interruption on PCell shall not be more than the values specified for SA in TS 38.133 [6] clause 9.11A.

The rate of correct events observed during repeated tests shall be at least 90%.

16.6.5.3 NR SA FR1 - E-UTRA CGI Identification of E-UTRA cell for 1 Rx UE

16.6.5.3.1 Test purpose

To verify the requirement for identification of a new CGI of E-UTRA cell with autonomous gaps in NR SA in TS 38.133 clause 9.4A.4.

16.6.5.3.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards and supporting acquisition of CGI from neighbour E-UTRA cell using autonomous gap.

16.6.5.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.5.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.5.3.

16.6.5.3.4 Test description

The test scenario comprises of one NR carrier and an E-UTRA carrier and two cells. PDCCHs indicating new transmissions shall be sent continuously to ensure that the UE would have ACK/NACK sending during identifying a new CGI of E-UTRAN cell.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively:

- At the start of time duration T1, the UE does not have any timing information of Cell 2.
- Starting T2, cell 2 becomes detectable and the UE is expected to detect and send a measurement report. A RRC message implying SI reading shall be sent to the UE during period T2, after the UE has reported Event B2. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to *setup*.
- The start of T3 is the instant when the last TTI containing the RRC message implying SI reading is sent to the UE.

16.6.5.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.6.5.3.4.1-1.

Table 16.6.5.3.4.1-1: Supported test configurations

Configuration	Description
16.6.5.3-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.6.5.3-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.5.3-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.5.3-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.6.5.3-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.6.5.3-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 16.6.5.3.4.1-2

Table 16.6.5.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.5.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 16.6.5.3.4.3.
2. The power levels and settings for NR PCell (Cell 1) and E-UTRA neighbour cell (Cell 2) are set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Table 16.3.1.3.4.1-3 below.

Table 16.6.5.3.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
LTE Channel Bandwidth	MHz	10	
LTE PDSCH/PCFICH/PDCCH/PHICH parameters			As specified in clause A.6.1.1
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
useAutonomousGaps		setup	As specified in clause 5.5.3.1 in TS 38.331[13].
Time offset between cells	ms	3	Asynchronous cells
T1	s	5	
T2	s	≤10	
T3	s	5	

16.6.5.3.4.2 Test procedure

Throughout the test, the UE shall be scheduled to perform DL reception on every slot suitable for DL.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 16.6.5.3.5-1 and Table 16.6.5.3.5-2. T1 starts.

3. The SS transmits an *RRCReconfiguration* message to configure event B2 triggered measurement reporting on E-UTRA Cell 2.

4. The UE transmits an *RRCReconfigurationComplete* message.

5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 16.6.5.3.5-1 and 16.6.5.3.5-2, T2 starts.

6. UE transmits a *MeasurementReport* message triggered by Event B2.

7. After receiving *MeasurementReport* message in step 6, the SS transmits an *RRCReconfiguration* message to release the gap configuration.

8. UE transmits an *RRCReconfigurationComplete* message.

9. After receiving *RRCReconfigurationComplete* message in step 6, the SS transmits an *RRCReconfiguration* message to configure an autonomous gap based CGI measurement reporting on E-UTRA Cell 2.

10. The start of T3 is the instant when the last TTI containing the *RRCReconfiguration* message in step 7 is sent to the UE, at that instant the SS shall switch the power setting from T2 to T3 as specified in Table 16.6.5.3.5-1 and 16.6.5.3.5-2.

11. The UE transmits an *RRCReconfigurationComplete* message.

12. If the UE

    a) transmits a *MeasurementReport* message containing CGI of E-UTRA Cell 2 less than 240 ms from the beginning of time period T3, and

    b) transmits ACK/NACKs no less than the minimum number of ACK/NACKs given in Table 16.6.5.3.5-5 from the start of T3 until 240 ms,

then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

13. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 14 + 2) for next iteration of the test procedure loop.

14. Repeat step 2-13 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

16.6.5.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 16.6.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1

Table 16.6.1.1.4.3-2: MeasConfig (Step 3, 7 & 9, test procedure)

Derivation path: Table H.3.1-2 with condition INTER-RAT			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfig[1] CHOICE {			
reportConfigInterRAT	ReportConfigInterRAT-B2	Table 16.6.1.1.4.3-3	Step 3
	ReportConfigInterRAT-CGI	Table 16.6.1.1.4.3-5	Step 9
}			
}			
measGapConfig	MeasGapConfig-DEFAULT specified in Table H.3.1-6 with condition gapUE and Pattern #0		Step 3
measGapConfig SEQUENCE {			Step 7
gapUE CHOICE {			
release	null	MG needs to be released to apply interruption requirements	
}			
}			
}			

Table 16.6.1.1.4.3-3: ReportConfigInterRAT-B2 (Table 16.6.1.1.4.3-2)

Derivation Path: Table H.3.1-4A			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT ::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventB2 SEQUENCE {			
b2-Threshold1 CHOICE {			
rsrp	58	Actual threshold = 58-156 = -98dBm/SCS	SCS15
	61	Actual threshold = 61-156 = -95dBm/SCS	SCS30

}			
b2-Threshold2EUTRA CHOICE {			
rsrp	31	Actual threshold = 31-140 = -109dBm	
}			
}			
}			
}			
}			
}			

Table 16.6.1.1.4.3-4: MeasResults (Step 6, test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measResultServingMOList	Not checked		
measResultNeighCells CHOICE {			
measResultListEUTRA SEQUENCE (SIZE (1..maxCellReport)) OF MeasResultEUTRA {	1 entry		
MeasResultEUTRA[1] SEQUENCE {		Entry 1	
eutra-PhysCellId	EUTRA-PhysCellId of Cell 2		
measResult SEQUENCE {			
rsrp	(0..97)		
}			
cgi-Info	Not present		
}			
}			
}			
}			

Table 16.6.1.1.4.3-5: ReportConfigInterRAT-CGI (Table 16.6.1.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-141 with condition CGI			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT ::= SEQUENCE {			
reportType CHOICE {			
reportCGI SEQUENCE {			
cellForWhichToReportCGI	EUTRA-PhysCellId of Cell 2		
useAutonomousGaps-r16	setup		
}			
}			
}			

Table 16.6.1.1.4.3-6: MeasResults (Step 12, test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measResultServingMOList	Not checked		
measResultNeighCells CHOICE {			
measResultListEUTRA SEQUENCE (SIZE (1..maxCellReport)) OF MeasResultEUTRA {	1 entry		
MeasResultEUTRA[1] SEQUENCE {		Entry 1	
eutra-PhysCellId	EUTRA-PhysCellId of Cell 2		
measResult	Not checked		
cgi-Info	Checked		
}			
}			

}			
}			

16.6.5.3.5 Test requirements

Table 16.6.5.3.4.1-3, Table 16.6.5.3.5-1 and Table 16.6.5.3.5-2 define the primary level settings including test tolerances for the test.

Table 16.6.5.3.5-3: NR cell specific test parameters (Cell 1)

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1,2,3,4,5,6	1		
Duplex mode			1,4	FDD		
			2,3,5,6	TDD		
TDD Configuration			2,5	TDDConf.1.1		
			3,6	TDDConf.2.1		
$BW_{channel}$		MHz	1,2,4,5	10: $N_{RB,c}$ = 52		
			3,6	20: $N_{RB,c}$ = 51		
PDSCH reference measurement channel			1,4	SR.1.1 FDD		
			2,5	SR.1.1 TDD		
			3,6	SR.2.1 TDD		
CORSET reference channel			1,4	CR.1.1 FDD		
			2,5	CR.1.1 TDD		
			3,6	CR.2.1 TDD		
BWP configurations	Initial DL BWP		1,2,3,4,5,6	DLBWP.0.1		
	Dedicated DL BWP		1,2,3,4,5,6	DLBWP.1.1		
	Initial UL BWP		1,2,3,4,5,6	ULBWP.0.1		
	Dedicated UL BWP		1,2,3,4,5,6	ULBWP.1.1		
OCNG pattern[Note1]			1,2,3,4,5,6	OP.1		
SMTC configuration			1,2,3,4,5,6	SMTC.1		
SSB configuration			1,2,4,5	SSB.1 FR1		
			3,6	SSB.1 RedCap FR1		
b2-Threshold1		dBm/SCS	1,2,4,5	-98		
			3,6	-95		
b2-Threshold2EUTRA		dBm/15kHz	1,2,3,4,5,6	-109		
EPRE ratio of PSS to SSS		dB	1,2,3,4,5,6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1,2,3,4,5,6	-106.55		
N_{oc}[Note2]		dBm/SCS	1,2,4,5	-106.55		
			3,6	-103.55		
$\hat{E}_s/N_{oc}$		dB	1,2,3,4,5,6	18	-2	-2
$\hat{E}_s/I_{ot}$[Note3]		dB	1,2,3,4,5,6	18	-2	-2
SS-RSRP[Note3]		dBm/SCS	1,2,4,5	-88.55	-108.55	-108.55
			3,6	-85.55	-105.55	-105.55
SSB_RP[Note3]		dBm/SCS	1,2,4,5	-88.55	-108.55	-108.55
			3,6	-85.55	-105.55	-105.55
Io[Note3]		dBm/9.36 MHz	1,2,4,5	-60.53	-76.47	-76.47
		dBm/18.36 MHz	3,6	-57.60	-73.55	-73.55
Propagation condition			1,2,3,4,5,6	AWGN		
Antenna Configuration			1,2,3,4,5,6	1x1		

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	$\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.6.5.3.5-4: E-UTRA cell specific test parameters (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1,2,3,4,5,6	2		
Duplex mode		1,2,3	FDD		
		4,5,6	TDD		
TDD special subframe configuration[Note1]		4,5,6	6		
TDD uplink-downlink configuration[Note1]		4,5,6	1		
$BW_{channel}$	MHz	1,2,3,4,5,6	10 MHz: $N_{RB,c}$ = 50		
PDSCH parameters: DL Reference Measurement Channel[Note2]		1,2,3	10 MHz: R.3 FDD		
		4,5,6	10 MHz: R.0 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1,2,3	10 MHz: R.6 FDD		
		4,5,6	10 MHz: R.6 TDD		
OCNG Patterns[Note2]		1,2,3	10 MHz: OP.10 FDD		
		4,5,6	10 MHz: OP.1 TDD		
PBCH_RA	dB	1,2,3,4,5,6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note3]					
OCNG_RB[Note3]					
N_{oc}[Note4]	dBm/15kHz	1,2,3,4,5,6	-106		
$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6	-Infinity	7.55	7.55
$\hat{E}_s/I_{ot}$[Note5]	dB	1,2,3,4,5,6	-Infinity	7.55	7.55
RSRP[Note5]	dBm/15kHz	1,2,3,4,5,6	-Infinity	-98.45	-98.45
SCH_RP[Note5]	dBm/15kHz	1,2,3,4,5,6	-Infinity	-98.45	-98.45
Propagation Condition		1,2,3,4,5,6	AWGN		
Antenna Configuration		1,2,3,4,5,6	1x1		

Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall transmit a measurement report containing the cell global identifier of Cell 2 within overall delay from the start of T3, where the overall delay is calculated as follows,

Overall delay = $T_{RRC\ Processing}$+$T_{identify_CGI_RedCap,\ E\text{-}UTRAN}$ + additional margin + TTI insertion uncertainty

- $T_{RRC\ Processing}$ = 15 ms;
- $T_{identify_CGI_RedCap,\ E\text{-}UTRAN}$ = 190 ms, is the maximum allowed time for the UE to identify a new CGI of an E-UTRA cell;
- TTI insertion uncertainty = 2 x TTI_{DCCH} = 2ms, is the delay uncertainty when inserting the measurement report to the TTI of the uplink DCCH;
- additional margin = 30 ms, is specified in 38.133 [6] clause 9.4A.4.2

Which gives overall delay = 15 + 190 + 30 + 2 = 237 ms, allow 240 ms.

From the start of T3 until 240 ms. The number of ACK/NACK being transmitted by the UE shall be no less than the minimum number of ACK/NACK given in Table 16.6.5.3.5-5.

The rate of correct events observed during repeated tests shall be at least 90%.

Table 16.6.5.3.5-5: Minimum number of ACK/NACKs transmitted by the UE during the overall delay

Test configuration	Minimum number of transmitted ACK/NACKs[Note 1]
1,4	127
2,5	42
3,6	115
NOTE 1: The overall ACK/NACK number is caused by two parts. Firstly, at least X ACK/NACK shall be sent during identifying the cell global identifier of cell 2, where X is defined in 38.133 [6] Table 9.4A.4.3-1. Secondly, given that continuous DL data allocation, additional 43, 14 and 34 ACK/NACK shall be sent for FDD 15 kHz, TDD 15 kHz and TDD 30 kHz, respectively, from the start of T3 until 240 ms excludes 190 ms for identifying the cell global identifier of cell 2.	

16.6.5.4 NR SA FR1 - E-UTRA CGI Identification of E-UTRA cell for 2 Rx UE

16.6.5.4.1 Test purpose

To verify the requirement for identification of a new CGI of E-UTRA cell with autonomous gaps in NR SA in TS 38.133 clause 9.4A.4.

16.6.5.4.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards and supporting acquisition of CGI from neighbour E-UTRA cell using autonomous gap.

16.6.5.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.6.5.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.6.5.4.

16.6.5.4.4 Test description

Same as the test description given in clause 16.6.5.3.4

16.6.5.4.4.1 Initial conditions

Same as the initial conditions given in clause 16.6.5.3.4 with following exceptions:

- Table 16.6.5.3.4.1-1 is replaced by Table 16.6.5.4.4.1-1;

- Table 16.6.5.3.4.1-2 is replaced by Table 16.6.5.4.4.1-2;
- Table 16.6.5.3.4.1-3 is replaced by Table 16.6.5.4.4.1-3.

Table 16.6.5.4.4.1-1: Supported test configurations

Configuration	Description
16.6.5.4-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
16.6.5.4-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.5.4-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
16.6.5.4-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
16.6.5.4-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
16.6.5.4-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.6.5.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.6.5.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 16.6.5.4.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
LTE Channel Bandwidth	MHz	10	
LTE PDSCH/PCFICH/PDCCH/PHICH parameters			As specified in clause A.6.1.1
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
useAutonomousGaps		setup	As specified in clause 5.5.3.1 in TS 38.331[13].
Time offset between cells	ms	3	Asynchronous cells
T1	s	5	
T2	s	≤10	
T3	s	5	

16.6.5.4.4.2 Test procedure

Same as the test procedure given in clause 16.6.5.3.4.2 with following exceptions:

- Step 12 in clause 16.6.5.3.4.2 is replaced by following step:

  12. If the UE

      a) transmits a *MeasurementReport* message containing CGI of E-UTRA Cell 2 less than 200 ms from the beginning of time period T3, and

      b) transmits ACK/NACKs no less than the minimum number of ACK/NACKs given in Table 16.6.5.4.5-5 from the start of T3 until 200 ms,

then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

16.6.5.4.4.3 Message contents

Same as the message contents given in clause 16.6.5.3.4.3.

16.6.5.4.5 Test requirements

Table 16.6.5.4.4.1-3, Table 16.6.5.4.5-1 and Table 16.6.5.4.5-2 define the primary level settings including test tolerances for the test.

Table 16.6.5.4.5-3: NR cell specific test parameters (Cell 1)

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1,2,3,4,5,6	1		
Duplex mode			1,4	FDD		
			2,3,5,6	TDD		
TDD Configuration			2,5	TDDConf.1.1		
			3,6	TDDConf.2.1		
$BW_{channel}$		MHz	1,2,4,5	10: $N_{RB,c}$ = 52		
			3,6	20: $N_{RB,c}$ = 51		
PDSCH reference measurement channel			1,4	SR.1.1 FDD		
			2,5	SR.1.1 TDD		
			3,6	SR.2.1 TDD		
CORSET reference channel			1,4	CR.1.1 FDD		
			2,5	CR.1.1 TDD		
			3,6	CR.2.1 TDD		
BWP configurations	Initial DL BWP		1,2,3,4,5,6	DLBWP.0.1		
	Dedicated DL BWP		1,2,3,4,5,6	DLBWP.1.1		
	Initial UL BWP		1,2,3,4,5,6	ULBWP.0.1		
	Dedicated UL BWP		1,2,3,4,5,6	ULBWP.1.1		
OCNG pattern[Note1]			1,2,3,4,5,6	OP.1		
SMTC configuration			1,2,3,4,5,6	SMTC.1		
SSB configuration			1,2,4,5	SSB.1 FR1		
			3,6	SSB.1 RedCap FR1		
b2-Threshold1		dBm/SCS	1,2,4,5	-98		
			3,6	-95		
b2-Threshold2EUTRA		dBm/15kHz	1,2,3,4,5,6	-109		
EPRE ratio of PSS to SSS		dB	1,2,3,4,5,6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc}[Note2]		dBm/15 KHz	1,2,3,4,5,6	-106		
N_{oc}[Note2]		dBm/SCS	1,2,4,5	-106		
			3,6	-103		
$\hat{E}_s/N_{oc}$		dB	1,2,3,4,5,6	18	-2	-2
$\hat{E}_s/I_{ot}$[Note3]		dB	1,2,3,4,5,6	18	-2	-2
SS-RSRP[Note3]		dBm/SCS	1,2,4,5	-88	-108	-108
			3,6	-85	-105	-105
SSB_RP[Note3]		dBm/SCS	1,2,4,5	-88	-108	-108
			3,6	-85	-105	-105
Io[Note3]		dBm/9.36 MHz	1,2,4,5	-59.98	-75.92	-75.92
		dBm/18.36 MHz	3,6	-57.05	-72.99	-72.99

Propagation condition		1,2,3,4,5,6	AWGN
Antenna Configuration and Correlation Matrix		1,2,3,4,5,6	1x2 Low

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.6.5.4.5-4: E-UTRA cell specific test parameters (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1,2,3,4,5,6	2		
Duplex mode		1,2,3	FDD		
		4,5,6	TDD		
TDD special subframe configuration[Note1]		4,5,6	6		
TDD uplink-downlink configuration[Note1]		4,5,6	1		
$BW_{channel}$	MHz	1,2,3,4,5,6	10 MHz: $N_{RB,c}$ = 50		
PDSCH parameters: DL Reference Measurement Channel[Note2]		1,2,3	10 MHz: R.3 FDD		
		4,5,6	10 MHz: R.0 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		1,2,3	10 MHz: R.6 FDD		
		4,5,6	10 MHz: R.6 TDD		
OCNG Patterns[Note2]		1,2,3	10 MHz: OP.10 FDD		
		4,5,6	10 MHz: OP.1 TDD		
PBCH_RA	dB	1,2,3,4,5,6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note3]					
OCNG_RB[Note3]					
N_{oc}[Note4]	dBm/15kHz	1,2,3,4,5,6	-106		
$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6	-Infinity	7	7
$\hat{E}_s/I_{ot}$[Note5]	dB	1,2,3,4,5,6	-Infinity	7	7
RSRP[Note5]	dBm/15kHz	1,2,3,4,5,6	-Infinity	-99	-99
SCH_RP[Note5]	dBm/15kHz	1,2,3,4,5,6	-Infinity	-99	-99
Propagation Condition		1,2,3,4,5,6	AWGN		
Antenna Configuration and Correlation Matrix		1,2,3,4,5,6	1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall transmit a measurement report containing the cell global identifier of Cell 2 within overall delay from the start of T3, where the overall delay is calculated as follows,

Overall delay = $T_{RRC\ Processing}$+$T_{identify_CGI_RedCap,\ E\text{-}UTRAN}$ + additional margin + TTI insertion uncertainty

- $T_{RRC\ Processing}$ = 15 ms;
- $T_{identify_CGI_RedCap,\ E\text{-}UTRAN}$ = 150 ms, is the maximum allowed time for the UE to identify a new CGI of an E-UTRA cell;
- TTI insertion uncertainty = 2 x TTI_{DCCH} = 2ms, is the delay uncertainty when inserting the measurement report to the TTI of the uplink DCCH;
- additional margin = 30 ms, is specified in 38.133 [6] clause 9.4A.4.2

Which gives overall delay = 15 + 150 + 30 + 2 = 197 ms, allow 200 ms.

From the start of T3 until 200 ms. The number of ACK/NACK being transmitted by the UE shall be no less than the minimum number of ACK/NACK given in Table 16.6.5.4.5-5.

The rate of correct events observed during repeated tests shall be at least 90%.

Table 16.6.5.4.5-5: Minimum number of ACK/NACKs transmitted by the UE during the overall delay

Test configuration	Minimum number of transmitted ACK/NACKs Note 1
1,4	127
2,5	42
3,6	115
NOTE 1: The overall ACK/NACK number is caused by two parts. Firstly, at least X ACK/NACK shall be sent during identifying the cell global identifier of cell 2, where X is defined in 38.133 [6] Table 9.4A.4.3-1. Secondly, given that continuous DL data allocation, additional 43, 14 and 34 ACK/NACK shall be sent for FDD 15 kHz, TDD 15 kHzand TDD 30 kHz, respectively, from the start of T3 until 200 ms excludes 150 ms for identifying the cell global identifier of cell 2.	

16.7 Measurement performance requirements for RedCap

16.7.1 SS-RSRP for RedCap

16.7.1.0 Minimum conformance requirements

16.7.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements

The accuracy requirements in clause 6.7.1.0.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 16.7.1.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 16.7.1.0.1-1: SS-RSRP Intra frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 1 range		
			NR operating band groups Note 2	Minimum Io	Maximum Io

dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±5.5	±10	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±9	±12	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.2.1 and 10.1.6.

16.7.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements

The accuracy requirements in clause 6.7.1.0.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 16.7.1.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 16.7.1.0.2-1: SS-RSRP Intra frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}s/Iot$ Note 2	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
			NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50

±3	±4	≥-3	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4	±4	≥-6	Note 3	Note 3	Note 3	N/A	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.2.1 and 10.1.6.

16.7.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements

The accuracy requirements in clause 6.7.1.0.3 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 16.7.1.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

Table 16.7.1.0.3-1: SS-RSRP Inter frequency Absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 2	**Io** Note 1 **range**				
			NR operating band groups Note 3	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±5.5	±10	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±9	±12	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F,	N/A	N/A	-70	-50

			NR_FDD_FR1_G, NR_FDD_FR1_H				
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: Void NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.4.1.1 and 10.1.6.

16.7.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements

The accuracy requirements in clause 6.7.1.0.4 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 16.7.1.0.4-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- $|Channel\ 1_Io - Channel\ 2_Io| \leq 20$ dB

Table 16.7.1.0.4-1: SS-RSRP Inter frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 2	**Io** Note 1 **range**				
			NR operating band groups Note 3	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±5.5	±7	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies. NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

The reporting range for SS-RSRP is defined from -156dBm to -31dBm with 1dB resolution. The mapping of the measured quantity to the reported value is defined by Table 4.7.1.0.1-2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.4.1.2 and 10.1.6.

16.7.1.1 Intra-frequency measurements for RedCap for 1 Rx UE

16.7.1.1.1 NR SA FR1 SS-RSRP absolute measurement accuracy for 1 Rx UE

16.7.1.1.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

16.7.1.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.7.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.1.1.

16.7.1.1.1.4 Test description

16.7.1.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.7.1.1.1.4.1-1.

Table 16.7.1.1.1.4.1-1: NR SA FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
16.7.1.1.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.1.1.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.1.1.1-3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.1.1.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 16.7.1.1.1.4.1-2.

Table 16.7.1.1.1.4.1-2: Initial conditions for SS-RSRP intra frequency absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 16.7.1.1.1.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour in the same frequency and the target cell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

16.7.1.1.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.1.1.4.2 with following exceptions:

- Table 6.7.1.1.1.5-1 is replaced by Table 16.7.1.1.1.5-1.

- Table 6.7.1.1.1.5-2 is replaced by Table 16.7.1.1.1.5-2.

16.7.1.1.1.4.3 Message contents

Same as the message contents given in clause 6.7.1.1.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.1.1-1 applies to test configuration 16.7.1.1.1-4.
- Table H.3.1-3 is used with associated condition SSB.1 RedCap FR1 for test configuration 16.7.1.1.1-3

16.7.1.1.1.5 Test requirement

Table 16.7.1.1.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 16.7.1.1.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 16.7.1.1.1.5-2 for test configurations 1, 2 and 4 and the corresponding absolute accuracy requirements in Table 16.7.1.1.1.5-3 for test configuration 3.

Table 16.7.1.1.1.5-1: NR SA FR1 SS-RSRP measurement accuracy test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1, 4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
BWP BW	Config 1, 4		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1, 4		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1, 4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	

	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1, 4		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.1 RedCap FR1	SSB. 1 RedCap FR1	SSB. 1 RedCap FR1	SSB. 1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1
Time offset with Cell 1	Config 1, 4	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1, 4		SMTC.2					
	Config 2,3		SMTC.1					
OCNG Patterns			OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2,4	Depending on band group	dBm/15KhZ	-107.5		-88		-114 + Δ_{BG_offset}
	Config 3	Depending on band group		Not applicable Note 5		-94		-115.20 + Δ_{BG_offset}
N_{oc} Note2	Config 1,2,4		dBm/SCS	-107.5		-88		Same as Noc/15kHz
	Config 3	Depending on band group		Not applicable Note 5		-91		-112.20 + Δ_{BG_offset}
$\hat{E}_s/I_{ot}$			dB	2.23	-5.57	2.23	-5.57	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1.4	6	1.4	3	0
SS-RSRP Note3	Config 1,2,4	Depending on band group	dBm/SCS	-101.50	-106.10	-82	-86.60	-111.00 + Δ_{BG_offset}	-114.00 + Δ_{BG_offset}
	Config 3	Depending on band group		Not applicable Note 5	Not applicable Note 5	-85	-89.60	-109.20 + Δ_{BG_offset}	-112.2+ Δ_{BG_offset}
Io Note3	Config 1,2,4	Depending on band group	dBm/ 9.36MHz	-71.68		-52.18		-80.20 + Δ_{BG_offset}	
	Config 3	Depending on band group	dBm/ 38.16MHz	Not applicable Note 5		-51.91		-75.13 + Δ_{BG_offset}	
Propagation condition			-	AWGN					
Antenna configuration				1x1					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 7: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.

Table 16.7.1.1.1.5-2: SS-RSRP Intra frequency absolute accuracy requirements for the reported values for test configurations 1, 2 and 4

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest reported value (Cell 2)	43	59	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	35
			Bands NR_FDD_FR1_B	36
			Bands NR_TDD_FR1_C	36
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	37
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	37
			NR_FDD_FR1_F	38
			Bands NR_FDD_FR1_G	38
			Bands NR_FDD_FR1_H	39
Highest reported value (Cell 2)	57	80	NR_FDD_FR1_A, NR_TDD_FR1_A	50
			NR_FDD_FR1_B	50
			NR_TDD_FR1_C	51
			NR_FDD_FR1_D, NR_TDD_FR1_D	51
			NR_FDD_FR1_E, NR_TDD_FR1_E	52
			NR_FDD_FR1_F	52
			NR_FDD_FR1_G	53
			NR_FDD_FR1_H	53
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 2)	39	56	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	31
			Bands NR_FDD_FR1_B	31
			Bands NR_TDD_FR1_C	32
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	32
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	33
			NR_FDD_FR1_F	33
			Bands NR_FDD_FR1_G	34
			Bands NR_FDD_FR1_H	34
Highest reported value (Cell 2)	62	83	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	54
			Bands NR_FDD_FR1_B	55
			Bands NR_TDD_FR1_C	55
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	56
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	56
			NR_FDD_FR1_F	57
			Bands NR_FDD_FR1_G	57
			Bands NR_FDD_FR1_H	58
Note 1: NR operating band groups are as defined in Section 3A.4.1.				

Table 16.7.1.1.1.5-3: SS-RSRP Intra frequency absolute accuracy requirements for the reported values for test configuration 3

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest reported value (Cell 2)	N/A	56	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	37
			Bands NR_FDD_FR1_B	38
			Bands NR_TDD_FR1_C	38
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	39
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	39
			NR_FDD_FR1_F	40
			Bands NR_FDD_FR1_G	40
			Bands NR_FDD_FR1_H	41
Highest reported value (Cell 2)	N/A	77	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	51
			Bands NR_FDD_FR1_B	52
			Bands NR_TDD_FR1_C	52
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	53
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	53
			NR_FDD_FR1_F	54
			Bands NR_FDD_FR1_G	54
			Bands NR_FDD_FR1_H	55
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 2)	N/A	53	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	33
			Bands NR_FDD_FR1_B	33
			Bands NR_TDD_FR1_C	34
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	34
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	35
			NR_FDD_FR1_F	35
			Bands NR_FDD_FR1_G	36
			Bands NR_FDD_FR1_H	36
Highest reported value (Cell 2)	N/A	80	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	56
			Bands NR_FDD_FR1_B	56
			Bands NR_TDD_FR1_C	57
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	57
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	58
			NR_FDD_FR1_F	58
			Bands NR_FDD_FR1_G	59
			Bands NR_FDD_FR1_H	59
Note 1: NR operating band groups are as defined in Section 3A.4.1.				

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

16.7.1.1.2 NR SA FR1 SS-RSRP relative measurement accuracy for 1 Rx UE

16.7.1.1.2.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP relative measurement accuracy is within the specified limits for all bands.

16.7.1.1.2.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.7.1.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.1.1.

16.7.1.1.2.4 Test description

16.7.1.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.7.1.1.2.4.1-1.

Table 16.7.1.1.2.4.1-1: NR SA FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
16.7.1.1.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.1.1.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.1.1.2-3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.1.1.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 16.7.1.1.2.4.1-2.

Table 16.7.1.1.2.4.1-2: Initial conditions for SS-RSRP intra frequency relative accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 16.7.1.1.2.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour in the same frequency and the target cell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

16.7.1.1.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.1.2.4.2 with following exceptions:

- Table 6.7.1.1.2.5-1 is replaced by Table 16.7.1.1.2.5-1.
- Table 6.7.1.1.2.5-2 is replaced by Table 16.7.1.1.2.5-2.

16.7.1.1.2.4.3 Message contents

Message contents are same as in clause 16.7.1.1.1.4.3.

16.7.1.1.2.5 Test requirement

Table 16.7.1.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 16.7.1.1.2.5-1 shall meet the corresponding relative accuracy requirements in Table 16.7.1.1.2.5-2.

Table 16.7.1.1.2.5-1: Same as Table 16.7.1.1.1.5-1 with the following exceptions:

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
N_{oc} Note2	Config 1,2,4	Depending on band group	dBm/15KhZ	-106		-88		-114 + Δ_{BG_offset}	
	Config 3	Depending on band group		Not applicable Note 5		-94		-114 + Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4		dBm/SCS	-106		-88		Same as Noc/15kHz	
	Config 3	Depending on band group		Not applicable Note 5		-91		-111 + Δ_{BG_offset}	
$\hat{E}_s/I_{ot}$			dB	1.88	-4.97	1.88	-4.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	2	6	2	3	0
SS-RSRP Note3	Config 1,2,4	Depending on band group	dBm/SCS	-100	-104	-82	-86.00	-111.00 + Δ_{BG_offset}	-114.00 + Δ_{BG_offset}
	Config 3	Depending on band group		Not applicable Note 5	Not applicable Note 5	-85	-89	-108 + Δ_{BG_offset}	-111+ Δ_{BG_offset}
Io Note3	Config 1,2,4	Depending on band group	dBm/ 9.36MHz	-70.05		-52.05		-80.20 + Δ_{BG_offset}	
	Config 3	Depending on band group	dBm/ 38.16MHz	Not applicable Note 5		-51.77		-73.93 + Δ_{BG_offset}	

Table 16.7.1.1.2.5-2: SS-RSRP Intra frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	RSRP_x - 8	RSRP_x - 8	RSRP_x - 7
Highest reported value (Cell 2)	RSRP_x - 1	RSRP_x - 1	RSRP_x + 1
Extreme Conditions			
Lowest reported value (Cell 2)	RSRP_x - 8	RSRP_x - 8	RSRP_x - 7
Highest reported value (Cell 2)	RSRP_x - 1	RSRP_x - 1	RSRP_x + 1
RSRP_x is the reported value of Cell 1			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

16.7.1.2 Intra-frequency measurements for RedCap for 2 Rx UE

16.7.1.2.1 NR SA FR1 SS-RSRP absolute measurement accuracy for 2 Rx UE

16.7.1.2.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

16.7.1.2.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.7.1.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.1.2.

16.7.1.2.1.4 Test description

16.7.1.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.7.1.2.1.4.1-1.

Table 16.7.1.2.1.4.1-1: NR SA FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
16.7.1.2.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.1.2.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.1.2.1-3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.1.2.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 16.7.1.2.1.4.1-2.

Table 16.7.1.2.1.4.1-2: Initial conditions for SS-RSRP intra frequency absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.1.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 16.7.1.2.1.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour in the same frequency and the target cell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

16.7.1.2.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.1.1.4.2 with following exceptions:

- Table 6.7.1.1.1.5-1 is replaced by Table 16.7.1.2.1.5-1.
- Table 6.7.1.1.1.5-2 is replaced by Table 16.7.1.2.1.5-2.

16.7.1.2.1.4.3 Message contents

Same as the message contents given in clause 6.7.1.1.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.1.1-1 applies to test configuration 16.7.1.2.1-4.
- Table H.3.1-3 is used with associated condition SSB.1 RedCap FR1 for test configuration 16.7.1.2.1-3

16.7.1.2.1.5 Test requirement

Table 16.7.1.2.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 16.7.1.2.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 16.7.1.2.1.5-2 for test configurations 1, 2 and 4 and the corresponding absolute accuracy requirements in Table 16.7.1.2.1.5-3 for test configuration 3.

Table 16.7.1.2.1.5-1: NR SA FR1 SS-RSRP measurement accuracy test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,4	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
BWP BW	Config 1,4		10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1,4		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1,4		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3

	Config 2,3		µs	-	3	-	3	-	3
SMTC configuration	Config 1,4			SMTC.2					
	Config 2,3			SMTC.1					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		kHz	15 kHz					
	Config 3			30kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4	Depending on band group	dBm/15KhZ	-107.50		-88		-114 + Δ_{BG_offset}	
	Config 3	Depending on band group		Not applicable[Note 5]		-94		-115.20 + Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4		dBm/SCS	-107.50		-88		Same as Noc/15kHz	
	Config 3	Depending on band group		Not applicable[Note 5]		-91		-112.20 + Δ_{BG_offset}	
$\hat{E}_s/I_{ot}$			dB	2.23	-5.57	2.23	-5.57	0.37	-5.56
$\hat{E}_s/N_{oc}$			dB	6	1.4	6	1.4	3	-0.8
SS-RSRP[Note3]	Config 1,2,4	Depending on band group	dBm/SCS	-101.50	-106.10	-82	-86.60	-111.00 + Δ_{BG_offset}	-114.80 + Δ_{BG_offset}
	Config 3	Depending on band group		Not applicable[Note 5]	Not applicable[Note 5]	-85	-89.60	-109.20 + Δ_{BG_offset}	-112.20 + Δ_{BG_offset}
Io[Note3]	Config 1,2,4	Depending on band group	dBm/9.36MHz	-71.68		-52.18		-80.39 + Δ_{BG_offset}	
	Config 3	Depending on band group	dBm/38.16MHz	Not applicable[Note 5]-		-51.91		-75.13 + Δ_{BG_offset}	
Propagation condition			-	AWGN					
Antenna configuration				1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Note 7: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.

Table 16.7.1.2.1.5-2: SS-RSRP Intra frequency absolute accuracy requirements for the reported values for test configurations 1 and 2

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest reported value (Cell 2)	44	60	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	36
			Bands NR_FDD_FR1_B	36
			Bands NR_TDD_FR1_C	37
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	37
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	38
			Bands NR_FDD_FR1_G	39
			Bands NR_FDD_FR1_H	39
Highest reported value (Cell 2)	56	79	NR_FDD_FR1_A, NR_TDD_FR1_A	48
			NR_FDD_FR1_B	48
			NR_TDD_FR1_C	49
			NR_FDD_FR1_D, NR_TDD_FR1_D	49
			NR_FDD_FR1_E, NR_TDD_FR1_E	50
			NR_FDD_FR1_G	51
			NR_FDD_FR1_H	51
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 2)	40	57	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	31
			Bands NR_FDD_FR1_B	32
			Bands NR_TDD_FR1_C	32
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	33
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	33
			Bands NR_FDD_FR1_G	34
			Bands NR_FDD_FR1_H	35
Highest reported value (Cell 2)	61	82	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	52
			Bands NR_FDD_FR1_B	53
			Bands NR_TDD_FR1_C	53
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	54
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	54
			Bands NR_FDD_FR1_G	55
			Bands NR_FDD_FR1_H	56
Note 1: NR operating band groups are as defined in Section 3A.4.1.				

Table 16.7.1.2.1.5-3: SS-RSRP Intra frequency absolute accuracy requirements for the reported values for test configuration 3

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3	
Lowest reported value (Cell 2)	N/A	57	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	38
			Bands NR_FDD_FR1_B	39
			Bands NR_TDD_FR1_C	39
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	40
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	40
			Bands NR_FDD_FR1_G	41
			Bands NR_FDD_FR1_H	42

Highest reported value (Cell 2)	N/A	76	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	50
			Bands NR_FDD_FR1_B	51
			Bands NR_TDD_FR1_C	51
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	52
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	52
			Bands NR_FDD_FR1_G	53
			Bands NR_FDD_FR1_H	54
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3**	
Lowest reported value (Cell 2)	N/A	54	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	34
			Bands NR_FDD_FR1_B	34
			Bands NR_TDD_FR1_C	35
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	35
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	36
			Bands NR_FDD_FR1_G	37
			Bands NR_FDD_FR1_H	37
Highest reported value (Cell 2)	N/A	79	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	55
			Bands NR_FDD_FR1_B	55
			Bands NR_TDD_FR1_C	56
			Bands NR_FDD_FR1_D, NR_TDD_FR1_D	56
			Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	57
			Bands NR_FDD_FR1_G	58
			Bands NR_FDD_FR1_H	58
Note 1: NR operating band groups are as defined in Section 3A.4.1.				

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

16.7.1.2.2 NR SA FR1 SS-RSRP relative measurement accuracy for 2 Rx UE

16.7.1.2.2.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP relative measurement accuracy is within the specified limits for all bands.

16.7.1.2.2.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.7.1.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.1.2.

16.7.1.2.2.4 Test description

16.7.1.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.7.1.2.2.4.1-1.

Table 16.7.1.2.2.4.1-1: NR SA FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
16.7.1.2.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.1.2.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.1.2.2-3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.1.2.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 16.7.1.2.2.4.1-2.

Table 16.7.1.2.2.4.1-2: Initial conditions for SS-RSRP intra frequency relative accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.1.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 16.7.1.2.2.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the NR neighbour in the same frequency and the target cell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

16.7.1.2.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.1.2.4.2 with following exceptions:

- Table 6.7.1.1.2.5-1 is replaced by Table 16.7.1.2.2.5-1.
- Table 6.7.1.1.2.5-2 is replaced by Table 16.7.1.2.2.5-2.

16.7.1.2.2.4.3 Message contents

Message contents are same as in clause 16.7.1.2.1.4.3.

16.7.1.2.2.5 Test requirement

Table 16.7.1.2.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 16.7.1.2.2.5-1 shall meet the corresponding relative accuracy requirements in Table 16.7.1.2.2.5-2.

Table 16.7.1.2.2.5-1: Same as Table 16.7.1.2.1.5-1 with the following exceptions:

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
N_{oc} Note2	Config 1,2,4	Depending on band group	dBm/15KhZ	-106		-88		-114 + Δ_{BG_offset}	
	Config 3	Depending on band group		N/A		-94		-114+ Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4		dBm/SCS	Same as Noc/15kHz		Same as Noc/15kHz		Same as Noc/15kHz	
	Config 3	Depending on band group		N/A		-91		-111 + Δ_{BG_offset}	

$\hat{E}_s/I_{ot}$			dB	1.88	-4.97	1.88	-4.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	2	6	2	3	0
SS-RSRP Note3	Config 1,2,4	Depending on band group	dBm/SCS	-100	-104	-82	-86	-111.00 + Δ_{BG_offset}	-114.00 + Δ_{BG_offset}
	Config 3	Depending on band group		N/A	N/A	-85	-89	-108.00 + Δ_{BG_offset}	-111.00 + Δ_{BG_offset}
Io Note3	Config 1,2,4	Depending on band group	dBm/ 9.36MHz	-70.05		-52.05		-80.20 + Δ_{BG_offset}	
	Config 3	Depending on band group	dBm/ 38.16MHz	N/A		-51.77		-73.93 + Δ_{BG_offset}	

Table 16.7.1.2.2.5-2: SS-RSRP Intra frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	RSRP_x - 8	RSRP_x – 8	RSRP_x – 7
Highest reported value (Cell 2)	RSRP_x - 1	RSRP_x – 1	RSRP_x + 1
Extreme Conditions			
Lowest reported value (Cell 2)	RSRP_x - 8	RSRP_x – 8	RSRP_x - 7
Highest reported value (Cell 2)	RSRP_x - 1	RSRP_x - 1	RSRP_x + 1
RSRP_x is the reported value of Cell 1			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

16.7.1.3 Inter-frequency measurements for RedCap for 1 Rx UE

16.7.1.3.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for 1 Rx UE

16.7.1.3.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

16.7.1.3.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.7.1.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.1.3.

16.7.1.3.1.4 Test description

16.7.1.3.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.7.1.3.1.4.1-1.

Table 16.7.1.3.1.4.1-1: NR SA FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
16.7.1.3.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.1.3.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.1.3.1-3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.1.3.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 16.7.1.3.1.4.1-2.

Table 16.7.1.3.1.4.1-2: Initial conditions for SS-RSRP inter frequency absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.1.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 16.7.1.3.1.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the neighbour cell on a different frequency than the PCell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

16.7.1.3.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.2.1.4.2 with following exceptions:

- Table 6.7.1.2.1.5-1 is replaced by Table 16.7.1.3.1.5-1.
- Table 6.7.1.2.1.5-2 is replaced by Table 16.7.1.3.1.5-2.

16.7.1.3.1.4.3 Message contents

Same as the message contents given in clause 6.7.1.2.1.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.1.2.1-1 applies to test configuration 16.7.2.2-4.
- Table H.3.1-3 is used with associated condition SSB.1 RedCap FR1 for test configuration 16.7.1.3.1-3

16.7.1.3.1.5 Test requirement

Table 16.7.1.3.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 16.7.1.3.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 16.7.1.3.1.5-2 for test configurations 1, 2 and 4 and the corresponding absolute accuracy requirements in Table 16.7.1.3.1.5-3 for test configuration 3.

Table 16.7.1.3.1.5-1: NR SA FR1 SS-RSRP measurement accuracy test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	Config 2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	Config 3		20: $N_{RB,c}$ = 51		20: $N_{RB,c}$ = 51	
Duplex mode	Config 1		FDD		FDD	
	Config 2		TDD		TDD	

	Config 3		TDD		TDD	
	Config 4		HD-FDD		HD-FDD	
TDD configuration	Config 1		N/A		N/A	
	Config 2		TDDConf.1.1		TDDConf.1.1	
	Config 3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD	-	CR.1.1 TDD	-
	Config 3		CR.2.1 TDD	-	CR.2.1 TDD	-
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	Config 3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	Config 1,4		SSB.1 FR1		SSB.1 FR1	
	Config 2		SSB.1 FR1		SSB.1 FR1	
	Config 3		SSB.1 RedCap FR1		SSB.1 RedCap FR1	
OCNG Patterns	Config 1~4		OP.1		OP.1	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	Config 1~4		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	Config 1~4		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	Config 1,4	ms	-	3	-	3
	Config 2,3	µs	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2		SMTC.2	
	Config 2,3		SMTC.1		SMTC.1	
EPRE ratio of PSS to SSS	Config 1~4	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2	Depending on band group	Config 1~4	dBm/15 kHz	-94.65	(N_{oc} for Channel 2 +8dB)	-115+ Δ_{BG_offset}
N_{oc} Note2	Depending on band group	Config 1,2,4	dBm/SSB SCS	-94.65	(N_{oc} for Channel 2 +8dB)	-115+ Δ_{BG_offset}
	Depending on band group	Config 3		-91.65	(N_{oc} for Channel 2 +8dB)	-112.00+ Δ_{BG_offset}

$\hat{E}_s/I_{ot}$		Config 1~4	dB	10	10	13	-3
SS-RSRP[Note3]	Depending on band group	Config 1,2,4	dBm/SCS	-84.65		(RSRP for Cell 2 +24dB)	-118.00+ Δ_{BG_offset}
	Depending on band group	Config 3		-81.65		(RSRP for Cell 2 +24dB)	-115.00+ Δ_{BG_offset}
Io[Note3]	Depending on band group	Config 1,2,4	dBm/ 9.36MHz	-56.28		(Io for Channel 2 +19.45dB)	-85.28+ Δ_{BG_offset}
	Depending on band group	Config 3	dBm/ 18.36MHz	-53.33		(Io for Channel 2 +19.45dB)	-82.35+ Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		Config 1~4	dB	10	10	13	-3
Propagation condition		Config 1~4	-	AWGN		AWGN	
Antenna configuration		Config 1~4		1x1 low		1x1 low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Note 6: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.

Table 16.7.1.3.1.5-2: SS-RSRP Inter frequency absolute accuracy requirements for the reported values for test configurations 1, 2 and 4

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	61	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	31
		Bands NR_FDD_FR1_B	32
		Bands NR_TDD_FR1_C	32
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	33
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	33
		Bands NR_FDD_FR1_G	34
		Bands NR_FDD_FR1_H	35
Highest reported value (Cell 2)	82	NR_FDD_FR1_A, NR_TDD_FR1_A	46
		NR_FDD_FR1_B	46
		NR_TDD_FR1_C	47
		NR_FDD_FR1_D, NR_TDD_FR1_D	47
		NR_FDD_FR1_E, NR_TDD_FR1_E	48
		NR_FDD_FR1_G	49
		NR_FDD_FR1_H	49
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	58	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	27
		Bands NR_FDD_FR1_B	27
		Bands NR_TDD_FR1_C	28
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	28

		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	29
		Bands NR_FDD_FR1_G	30
		Bands NR_FDD_FR1_H	30
Highest reported value (Cell 2)	85	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	50
		Bands NR_FDD_FR1_B	51
		Bands NR_TDD_FR1_C	51
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	52
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	52
		Bands NR_FDD_FR1_G	53
		Bands NR_FDD_FR1_H	54
Note 1: NR operating band groups are as defined in Section 3A.4.1.			

Table 16.7.1.3.1.5-3: SS-RSRP Inter frequency absolute accuracy requirements for the reported values for test configuration 3

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	64	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	34
		Bands NR_FDD_FR1_B	35
		Bands NR_TDD_FR1_C	35
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	36
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	36
		Bands NR_FDD_FR1_G	37
		Bands NR_FDD_FR1_H	38
Highest reported value (Cell 2)	85	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	49
		Bands NR_FDD_FR1_B	49
		Bands NR_TDD_FR1_C	50
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	50
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	51
		Bands NR_FDD_FR1_G	52
		Bands NR_FDD_FR1_H	52
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	61	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	30
		Bands NR_FDD_FR1_B	30
		Bands NR_TDD_FR1_C	31
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	31
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	32
		Bands NR_FDD_FR1_G	33
		Bands NR_FDD_FR1_H	33
Highest reported value (Cell 2)	88	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	53
		Bands NR_FDD_FR1_B	54
		Bands NR_TDD_FR1_C	54
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	55
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	55
		Bands NR_FDD_FR1_G	56
		Bands NR_FDD_FR1_H	57
Note 1: NR operating band groups are as defined in Section 3A.4.1.			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

16.7.1.3.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy for 1 Rx UE

16.7.1.3.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP relative measurement accuracy is within the specified limits for all bands.

16.7.1.3.2.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.7.1.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.1.3.

16.7.1.3.2.4 Test description

16.7.1.3.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.7.1.3.2.4.1-1.

Table 16.7.1.3.2.4.1-1: NR SA FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
16.7.1.3.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.1.3.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.1.3.2-3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.1.3.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 16.7.1.3.2.4.1-2.

Table 16.7.1.3.2.4.1-2: Initial conditions for SS-RSRP inter frequency relative accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.1.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 16.7.1.3.2.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the neighbour cell on a different frequency than the PCell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

16.7.1.3.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.2.2.4.2 with following exceptions:

- Table 6.7.1.2.2.5-1 is replaced by Table 16.7.1.3.2.5-1.
- Table 6.7.1.2.2.5-2 is replaced by Table 16.7.1.3.2.5-2.

16.7.1.3.2.4.3 Message contents

Message contents are same as in clause 16.7.1.3.1.4.3.

16.7.1.3.2.5 Test requirement

Table 16.7.1.3.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 16.7.1.3.2.5-1 shall meet the corresponding relative accuracy requirements in Table 16.7.1.3.2.5-2.

Table 16.7.1.3.2.5-1: Same as Table 16.7.1.3.1.5-1

Table 16.7.1.3.2.5-2: SS-RSRP Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 2)	SS-RSRP_x - 8	SS-RSRP_x - 32
Highest reported value (Cell 2)	SS-RSRP_x + 8	SS-RSRP_x - 17
Extreme Conditions		
Lowest reported value (Cell 2)	SS-RSRP_x - 10	SS-RSRP_x - 34
Highest reported value (Cell 2)	SS-RSRP_x + 10	SS-RSRP_x - 15
SS-RSRP_x is the reported value of Cell 1		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

16.7.1.4 Inter-frequency measurements for RedCap for 2 Rx UE

16.7.1.4.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for 2 Rx UE

16.7.1.4.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

16.7.1.4.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.7.1.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.1.4.

16.7.1.4.1.4 Test description

16.7.1.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.7.1.4.1.4.1-1.

Table 16.7.1.4.1.4.1-1: NR SA FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
16.7.1.4.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.1.4.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.1.4.1-3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.1.4.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 16.7.1.4.1.4.1-2.

Table 16.7.1.4.1.4.1-2: Initial conditions for SS-RSRP inter frequency absolute accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.1.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 16.7.1.4.1.4.3.

2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the neighbour cell on a different frequency than the PCell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

16.7.1.4.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.2.1.4.2 with following exceptions:

- Table 6.7.1.2.1.5-1 is replaced by Table 16.7.1.4.1.5-1.
- Table 6.7.1.2.1.5-2 is replaced by Table 16.7.1.4.1.5-2.

16.7.1.4.1.4.3 Message contents

Same as the message contents given in clause 6.7.1.2.1.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.1.2.1-1 applies to test configuration 16.7.1.4.1-4.
- Table H.3.1-3 is used with associated condition SSB.1 RedCap FR1 for test configuration 16.7.1.4.1-3

16.7.1.4.1.5 Test requirement

Table 16.7.1.4.1.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 16.7.1.4.1.5-1 shall meet the corresponding absolute accuracy requirements in Table 16.7.1.4.1.5-2 for test configurations 1, 2 and 4 and the corresponding absolute accuracy requirements in Table 16.7.1.4.1.5-3 for test configuration 3.

Table 16.7.1.4.1.5-1: NR SA FR1 SS-RSRP measurement accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~4		freq1	freq2	freq1	freq2
$BW_{channel}$	1,4	MHz	10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	2		10: $N_{RB,c}$ = 52		10: $N_{RB,c}$ = 52	
	3		20: $N_{RB,c}$ = 51		20: $N_{RB,c}$ = 51	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
	4		HD-FDD		HD-FDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 TDD		SR.2.1 TDD	

RMSI CORESET Reference Channel		1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
		2		CR.1.1 TDD	-	CR.1.1 TDD	-
		3		CR.2.1 TDD	-	CR.2.1 TDD	-
Dedicated CORESET Reference Channel		1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
		2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
		3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration		1,4		SSB.1 FR1		SSB.1 FR1	
		2		SSB.1 FR1		SSB.1 FR1	
		3		SSB.1 RedCap FR1		SSB.1 RedCap FR1	
OCNG Patterns		1~4		OP.1		OP.1	
TRS configuration		1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	
		2		TRS.1.1 TDD		TRS.1.1 TDD	
		3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration		1~4		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration		1~4		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1		1,4	ms	-	3	-	3
		2,3	µs	-	3	-	3
SMTC configuration		1,4		SMTC.2		SMTC.2	
		2,3		SMTC.1		SMTC.1	
EPRE ratio of PSS to SSS		1~4	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS Note 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
N_{oc} Note2	Depending on band group	1~4	dBm/15 kHz	-94.65		(N_{oc} for Channel 2 +8dB)	-115+ Δ_{BG_offset}
N_{oc} Note2	Depending on band group	1,2,4	dBm/SSB SCS	-94.65		(N_{oc} for Channel 2 +8dB)	-115+ Δ_{BG_offset}
	Depending on band group	3		-91.65		(N_{oc} for Channel 2 +8dB)	-112.00+ Δ_{BG_offset}
$\hat{E}_s/I_{ot}$		1~4	dB	10	10	13	-3
SS-RSRP Note3	Depending on band group	1,2,4	dBm/SCS	-84.65		(RSRP for Cell 2 +24dB)	-118.00+ Δ_{BG_offset}
	Depending on band group	3		-81.65		(RSRP for Cell 2 +24dB)	-115.00+ Δ_{BG_offset}
Io Note3	Depending on band group	1,2,4	dBm/ 9.36MHz	-56.28		(Io for Channel 2 +19.45dB)	-85.28+ Δ_{BG_offset}

	Depending on band group	3	dBm/ 18.36M Hz	-53.33		(Io for Channel 2 +19.45dB)	-82.35+ Δ_{BG_offset}
$\hat{E}_s / N_{oc}$		1~4	dB	10	10	13	-3
Propagation condition		1~4	-	AWGN		AWGN	
Antenna configuration		1~4		1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Note 6: Δ_{BG_offset} is defined in clause 3A.4, Table 3A.4.1-2.

Table 16.7.1.4.1.5-2: SS-RSRP Inter frequency absolute accuracy requirements for the reported values for test configurations 1, 2 and 4

Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	62	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	32
		Bands NR_FDD_FR1_B	33
		Bands NR_TDD_FR1_C	33
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	34
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	34
		Bands NR_FDD_FR1_G	35
		Bands NR_FDD_FR1_H	36
Highest reported value (Cell 2)	81	NR_FDD_FR1_A, NR_TDD_FR1_A	45
		NR_FDD_FR1_B	45
		NR_TDD_FR1_C	46
		NR_FDD_FR1_D, NR_TDD_FR1_D	46
		NR_FDD_FR1_E, NR_TDD_FR1_E	47
		NR_FDD_FR1_G	48
		NR_FDD_FR1_H	48
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	59	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	28
		Bands NR_FDD_FR1_B	28
		Bands NR_TDD_FR1_C	29
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	29
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	30
		Bands NR_FDD_FR1_G	31
		Bands NR_FDD_FR1_H	31
Highest reported value (Cell 2)	84	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	49
		Bands NR_FDD_FR1_B	50
		Bands NR_TDD_FR1_C	50
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	51
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	51

		Bands NR_FDD_FR1_G	52
		Bands NR_FDD_FR1_H	53
Note 1: NR operating band groups are as defined in Section 3A.4.1.			

Table 16.7.1.4.1.5-3: SS-RSRP Inter frequency absolute accuracy requirements for the reported values for test configuration 3

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	65	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	35
		Bands NR_FDD_FR1_B	36
		Bands NR_TDD_FR1_C	36
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	37
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	37
		Bands NR_FDD_FR1_G	38
		Bands NR_FDD_FR1_H	39
Highest reported value (Cell 2)	84	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	48
		Bands NR_FDD_FR1_B	48
		Bands NR_TDD_FR1_C	49
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	49
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	50
		Bands NR_FDD_FR1_G	51
		Bands NR_FDD_FR1_H	51
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	62	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	31
		Bands NR_FDD_FR1_B	31
		Bands NR_TDD_FR1_C	32
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	32
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	33
		Bands NR_FDD_FR1_G	34
		Bands NR_FDD_FR1_H	34
Highest reported value (Cell 2)	87	Bands NR_FDD_FR1_A, NR_TDD_FR1_A	52
		Bands NR_FDD_FR1_B	53
		Bands NR_TDD_FR1_C	53
		Bands NR_FDD_FR1_D, NR_TDD_FR1_D	54
		Bands NR_FDD_FR1_E, Bands NR_TDD_FR1_E	54
		Bands NR_FDD_FR1_G	55
		Bands NR_FDD_FR1_H	56
Note 1: NR operating band groups are as defined in Section 3A.4.1.			

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

16.7.1.4.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy for 2 Rx UE

16.7.1.4.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP relative measurement accuracy is within the specified limits for all bands.

16.7.1.4.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.7.1.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.1.4.

16.7.1.4.2.4 Test description

16.7.1.4.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 16.7.1.4.2.4.1-1.

Table 16.7.1.4.2.4.1-1: NR SA FR1 SS-RSRP measurement accuracy supported test configurations

Test Case ID	Description
16.7.1.4.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.1.4.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.1.4.2-3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.1.4.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 16.7.1.4.2.4.1-2.

Table 16.7.1.4.2.4.1-2: Initial conditions for SS-RSRP inter frequency relative accuracy in FR1

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.1.4.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

1. Message contents are defined in clause 16.7.1.4.2.4.3.
2. Cell 1 is the NR FR1 serving cell (PCell) and Cell 2 is the neighbour cell on a different frequency than the PCell for SS-RSRP measurements. The connection setup is done according to the settings in Annex C.1.1 and C.1.2.

16.7.1.4.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.2.2.4.2 with following exceptions:

- Table 6.7.1.2.2.5-1 is replaced by Table 16.7.1.4.2.5-1.
- Table 6.7.1.2.2.5-2 is replaced by Table 16.7.1.4.2.5-2.

16.7.1.4.2.4.3 Message contents

Message contents are same as in clause 16.7.1.4.1.4.3.

16.7.1.4.2.5 Test requirement

Table 16.7.1.4.2.5-1 defines the primary level settings including test tolerances for all tests.

Each SS-RSRP measurement report for each of the tests in Table 16.7.1.4.2.5-1 shall meet the corresponding relative accuracy requirements in Table 16.7.1.4.2.5-2.

Table 16.7.1.4.2.5-1: Same as Table 16.7.1.4.1.5-1

Table 16.7.1.4.2.5-2: SS-RSRP Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 2)	SS-RSRP_x - 7	SS-RSRP_x - 31
Highest reported value (Cell 2)	SS-RSRP_x + 7	SS-RSRP_x - 18
Extreme Conditions		
Lowest reported value (Cell 2)	SS-RSRP_x - 9	SS-RSRP_x - 33
Highest reported value (Cell 2)	SS-RSRP_x + 9	SS-RSRP_x - 17
SS-RSRP_x is the reported value of Cell 1		

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

16.7.2 SS-RSRQ for RedCap

16.7.2.0 Minimum conformance requirements

16.7.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements

When RedCap UE is capable of 2Rx, the minimum requirements given in clause 4.7.2.0.1 shall apply.

When RedCap UE is only required to support 1Rx, the absolute accuracy requirements in Table 16.7.2.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to TS 38.133 [6] Annex B.2.15 for a corresponding Band for each relevant SSB.

Table 16.7.2.0.1-1: SS-RSRQ Intra frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$	Io [Note 1] range				
			NR operating band groups [Note 3]	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3.5	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4.5	±5	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in 38.133 [6] clause 3.5.2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.6.1.1.

16.7.2.0.2 Inter-frequency SS-RSRQ absolute measurement accuracy requirements

When RedCap UE is capable of 2Rx, the minimum requirements given in clause 4.7.2.0.2 shall apply.

When RedCap UE is only required to support 1Rx, the absolute accuracy requirements in Table 16.7.2.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to TS 38.133 [6] Annex B.2.16 for a corresponding Band for each relevant SSB.

Table 16.7.2.0.2-1: SS-RSRQ Inter frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot	Io Note 1 range				
			NR operating band groups Note 3	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±3.5	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4.5	±5	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.8.1.1.

16.7.2.0.3 Inter-frequency SS-RSRQ relative measurement accuracy requirements

When RedCap UE is capable of 2Rx, the minimum requirements given in clause 4.7.2.0.3 shall apply.

When RedCap UE is only required to support 1Rx, the relative accuracy requirements in Table 16.7.2.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to TS 38.133 [6] Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 16.7.2.0.3-1: SS-RSRQ Inter frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±5	±5	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.8.1.2.

16.7.2.1 NR SA FR1 SS-RSRQ absolute measurement accuracy for 1 Rx UE

16.7.2.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRQ absolute measurement accuracy is within the specified limits for all bands.

16.7.2.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

16.7.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.2.1.

16.7.2.1.4 Test description

16.7.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.2.1.4.1 with followings exceptions:

- Table 6.7.2.1.4.1-1 is replaced by Table 16.7.2.1.4.1-1;
- Table 6.7.2.1.4.1-2 is replaced by Table 16.7.2.1.4.1-2;

Table 16.7.2.1.4.1-1: Supported test configurations

Config	Description
16.7.2.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

16.7.2.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.2.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.2.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.2.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	- Without LTE link		

16.7.2.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.2.1.4.2 with following exceptions:

- Table 6.7.2.1.5-1 is replaced by Table 16.7.2.1.5-1;
- Table 6.7.2.1.5-2 is replaced by Table 16.7.2.1.5-2.

16.7.2.1.4.3 Message contents

Same as the message contents given in clause 6.7.2.1.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.2.1-1 applies to test configuration 16.7.2.1-4.
- Table H.3.1-3 is used with associated condition SSB.1 RedCap FR1 for test configuration 16.7.2.1-3

Table 16.7.2.1.4.3-1: *RLC-Config*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-149			
Information Element	**Value/remark**	**Comment**	**Condition**
RLC-Config ::= CHOICE {			
am SEQUENCE {			
ul-AM-RLC SEQUENCE {			
maxRetxThreshold	t32		SRB1
}			
}			
}			

16.7.2.1.5 Test requirement

Same as the test requirements given in clause 6.7.2.1.5 with followings exceptions:

- Table 6.7.2.1.5-1 is replaced by Table 16.7.2.1.5-1;
- Table 6.7.2.1.5-2 is replaced by Table 16.7.2.1.5-2;

Table 16.7.2.1.5-1: NR cell specific test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1, 4		Not Applicable					

	Config 2		TDDConf.1.1						
	Config 3		TDDConf.2.1						
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52						
	Config 2		10: $N_{RB,c}$ = 52						
	Config 3		20: $N_{RB,c}$ = 51						
Gap Pattern ID			0						
BWP configuration	Initial DL BWP		DLBWP.0.1						
	Dedicated DL BWP		DLBWP.1.1						
	Initial UL BWP		ULBWP.0.1						
	Dedicated UL BWP		ULBWP.1.1						
DRX Cycle		ms	Not Applicable						
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-	
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD		
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD		
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD		
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD		
Control Channel RMC	Config 1, 4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-	
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD		
TRS Configuration	Config 1, 4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD		
OCNG Patterns			OP. 1						
SS-RSSI-Measurement			Not Applicable						
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3	
	Config 2,3	µs	-	3	-	3	-	3	
SMTC configuration	Config 1,4		SMTC.2						
	Config 2,3		SMTC.1						
SSB configuration	Config 1,2,4		SSB.1 FR1						
	Config 3		SSB.1 RedCap FR1						
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD						
	Config 2		TRS.1.1 TDD						
	Config 3		TRS.1.2 TDD						
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz						
	Config 3		30kHz						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4	Depending on band group	dBm/15kHz	-86.5		-101		-114+ Δ_{BG_offset}	
	Config 3	Depending on band group		-92.6		-		-114+ Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4	Depending on band group	dBm/SCS	-86.5		-101		-114+ Δ_{BG_offset}	
	Config 3	Depending on band group		-89.6		-		-111+ Δ_{BG_offset}	
$\hat{E}_s/I_{ot}$		dB	-1.76		-4.7		-5.46	-5.46	

$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note 3	Config 1,2, 4	Depending on band group	dBm/SCS	-83.5	-83.5	-103.9	-103.9	-118+ Δ_{BG_offset}	-118+ Δ_{BG_offset}
	Config 3	Depending on band Group		-85.6	-85.6	-	-	-115+ Δ_{BG_offset}	-115+ Δ_{BG_offset}
SS-RSRQ Note3		Depending on band group	dB	-14.77	-14.77	-16.76	-16.76	-17.34 + Δ_{BG_offset}	-17.34 + Δ_{BG_offset}
Io Note3	Config 1,2, 4	Depending on band group	dBm/ 9.36MHz	-50		-70		-83.5+ Δ_{BG_offset}	
	Config 3	Depending on band group	dBm/ 18.36MHz	-50		-		-80.6+ Δ_{BG_offset}	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x1	1x1	1x1	1x1	1x1	1x1

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in TS 38.133 [6] clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.
Note 7: Subtest 2 is not used when testing with 30kHz SSB SCS.

Table 16.7.2.1.5-2: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

	Test 1	**Test 2**	**Test 3**
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x +50	SS-RSRQ_x +44	SS-RSRQ_x +42
Highest reported value (Cell 2)	SS-RSRQ_x +64	SS-RSRQ_x +62	SS-RSRQ_x +61
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x +47	SS-RSRQ_x +43	SS-RSRQ_x +41
Highest reported value (Cell 2)	SS-RSRQ_x +67	SS-RSRQ_x +63	SS-RSRQ_x +62
NOTE: SS-RSRQ_x is the reported value of Cell 1.			

16.7.2.2 NR SA FR1 SS-RSRQ absolute measurement accuracy for 2 Rx UE

16.7.2.2.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRQ absolute measurement accuracy is within the specified limits for all bands.

16.7.2.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

16.7.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.2.2.

16.7.2.2.4 Test description

16.7.2.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.2.2.4.1 with followings exceptions:

- Table 6.7.2.1.4.1-1 is replaced by Table 16.7.2.2.4.1-1;
- Table 6.7.2.1.4.1-2 is replaced by Table 16.7.2.2.4.1-2;

Table 16.7.2.2.4.1-1: Supported test configurations

Config	Description
16.7.2.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.2.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.2.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.2.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.2.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.2.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	- Without LTE link		

16.7.2.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.2.1.4.2 with following exceptions:

- Table 6.7.2.1.5-1 is replaced by Table 16.7.2.2.5-1;
- Table 6.7.2.1.5-2 is replaced by Table 16.7.2.2.5-2.

16.7.2.2.4.3 Message contents

Same as the message contents given in clause 6.7.2.1.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.2.1-1 applies to test configuration 16.7.2.2-4.
- Table H.3.1-3 is used with associated condition SSB.1 RedCap FR1 for test configuration 16.7.2.2-3

16.7.2.2.5 Test requirement

Same as the test requirements given in clause 6.7.2.1.5 with followings exceptions:

- Table 6.7.2.1.5-1 is replaced by Table 16.7.2.2.5-1;
- Table 6.7.2.1.5-2 is replaced by Table 16.7.2.2.5-2;

Table 16.7.2.2.5-1: NR cell specific test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					

	Config 2,3		TDD								
	Config 4		HD-FDD								
TDD configuration	Config 1, 4		Not Applicable								
	Config 2		TDDConf.1.1								
	Config 3		TDDConf.2.1								
$BW_{channel}$	Config 1, 4	MHz	10: $N_{RB,c}$ = 52								
	Config 2		10: $N_{RB,c}$ = 52								
	Config 3		20: $N_{RB,c}$ = 51								
Gap Pattern ID			0								
BWP configuration	Initial DL BWP		DLBWP.0.1								
	Dedicated DL BWP		DLBWP.1.1								
	Initial UL BWP		ULBWP.0.1								
	Dedicated UL BWP		ULBWP.1.1								
DRX Cycle		ms	Not Applicable								
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-			
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD				
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD				
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD				
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD				
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD				
Control Channel RMC	Config 1, 4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-			
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD				
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD				
TRS Configuration	Config 1, 4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-			
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD				
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD				
OCNG Patterns			OP. 1								
SS-RSSI-Measurement			Not Applicable								
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3			
	Config 2,3	µs	-	3	-	3	-	3			
SMTC configuration	Config 1,4		SMTC.2								
	Config 2,3		SMTC.1								
SSB configuration	Config 1,2,4		SSB.1 FR1								
	Config 3		SSB.1 RedCap FR1								
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD								
	Config 2		TRS.1.1 TDD								
	Config 3		TRS.1.2 TDD								
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz								
	Config 3		30kHz								
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0			
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS(Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
N_{oc} Note2	Config 1,2,4	Depending on band group	dBm/15kHz	-86.5		-101		-114+ Δ_{BG_offset}			
	Config 3	Depending on band group		-92.6		-		-114+ Δ_{BG_offset}			
N_{oc} Note2	Config 1,2,4	Depending on band group	dBm/SCS	-86.5		-101		-114+ Δ_{BG_offset}			

	Config 3	Depending on band group		-89.6		-		-111+ Δ_{BG_offset}	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5..46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP Note 3	Config 1,2,4	Depending on band group	dBm/SCS	-83.5	-83.5	-103.9	-103.9	-118+ Δ_{BG_offs}	-118+ Δ_{BG_offs}
	Config 3	Depending on band Group		-86.6	-86.6	-	-	-115	-115+ Δ_{BG_offset}
SS-RSRQ Note3		Depending on band group	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
Io Note3	Config 1,2,4	Depending on band group	dBm/ 9.36MHz	-51.57		-70		-83.5+ Δ_{BG_offset}	
	Config 3	Depending on band group	dBm/ 18.36MHz	-50		-		-80.6+ Δ_{BG_offset}	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in TS 38.133 [6] clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.
Note 7: Subtest 2 is not used when testing with 30kHz SSB SCS.

Table 16.7.2.2.5-2: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

	Test 1	**Test 2**	**Test 3**
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x +52	SS-RSRQ_x +46	SS-RSRQ_x +44
Highest reported value (Cell 2)	SS-RSRQ_x +62	SS-RSRQ_x +60	SS-RSRQ_x +59
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x +49	SS-RSRQ_x +45	SS-RSRQ_x +43
Highest reported value (Cell 2)	SS-RSRQ_x +65	SS-RSRQ_x +61	SS-RSRQ_x +60
NOTE: SS-RSRQ_x is the reported value of Cell 1.			

16.7.2.3 Inter-frequency measurement accuracy for 1 Rx UE

16.7.2.3.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for 1 Rx UE

16.7.2.3.1.1 Test purpose

To verify that the inter-frequency SS-RSRQ absolute measurement accuracy is within the specified limits for all bands. This test will verify the requirements in TS 38.133[6] clause 10.1A.8.1.1

16.7.2.3.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

16.7.2.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.2.3.

16.7.2.3.1.4 Test description

16.7.2.3.1.4.1 Initial conditions

Same as the initial conditions given in 6.7.2.2.1 with followings exceptions:

- Table 6.7.2.2.1.4.1-1 is replaced by Table 16.7.2.3.1.4.1-1;
- Table 6.7.2.2.1.4.1-2 is replaced by Table 16.7.2.3.1.4.1-2;

Table 16.7.2.3.1.4.1-1: Supported test configurations

Config	Description
16.7.2.3.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.2.3.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.2.3.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.2.3.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 16.7.2.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.2.3.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

16.7.2.3.1.4.2 Test procedure

Same as the test procedure in clause 6.7.2.1.4.2 with following exceptions:

- Table 6.7.2.2.1.5-1 is replaced by Table 16.7.2.3.1.5-1;
- Table 6.7.2.2.1.5-2 is replaced by Table 16.7.2.3.1.5-2.

16.7.2.3.1.4.3 Message contents

Same as the message contents in clause 6.7.2.2.1.4.3 with following exceptions:

- Table H.3.1-3 is used with associated condition SSB.1 RedCap FR1 for test configuration 16.7.2.3.1-3.

16.7.2.3.1.5 Test requirement

Same as the test requirements in clause 6.7.2.2.1.5 with followings exceptions:

- Table 6.7.2.2.1.5-1 is replaced by Table 16.7.2.3.1.5-1;
- Table 6.7.2.2.1.5-2 is replaced by Table 16.7.2.3.1.5-2;

Table 16.7.2.3.1.5-1: NR cell specific test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					

	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
Gap pattern ID			0					
BWP BW	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
DRX Cycle		ms	Not Applicable					
PDSCH RMC	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC	Config 1,4		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS Configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OCNG pattern 1					
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3		SMTC.1					
SSB configuration	Config 1,2,4		SSB.1 FR1					
	Config 3		SSB.1 RedCap FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15					
	Config 3		30					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS[Note 1]								
EPRE ratio of OCNG to OCNG DMRS[Note 1]								
N_{oc} [Note2]	Config 1,2,4	dBm/ 15kHz	-81.68		-106		-116 + Δ_{BG_offset}	
	Config 3		-86.27		-113		-116 + Δ_{BG_offset}	
N_{oc} [Note2]	Config 1,2,4	dBm/ SCS	-81.68		-106		-116 + Δ_{BG_offset}	
	Config 3		-83.27		-110		-113 + Δ_{BG_offset}	
$\hat{E}_s / I_{ot}$		dB	-1.75		-1.75		3	-1.75
$\hat{E}_s / N_{oc}$		dB	-1.75		-1.75		3	-1.75

SS-RSRP[Note3]	Config 1,2,4	dBm/ SCS	-83.43	-107.75	-113+ Δ_{BG_offset}	-117.7+ Δ_{BG_offset}
	Config 3		-85.02	-111.75	-110+ Δ_{BG_offset}	-114.7+ Δ_{BG_offset}
SS-RSRQ[Note3]		dB	-14.77	-14.77	-12.56	-14.76
Io[Note3]	Config 1,2,4	dBm/ Ch BW	-51.51	-75.83	-83.28+ Δ_{BG_offset}	-85.83+ Δ_{BG_offset}
	Config 3		-53.17	-79.90	-80.36+ Δ_{BG_offset}	-82.90+ Δ_{BG_offset}
Propagation condition			AWGN			
Antenna configuration			1x1			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in TS 38.133 [6] clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 16.7.2.3.1.5-2: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

	Test 1	**Test 2**	**Test 3**
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_50	SS-RSRQ_50	SS-RSRQ_50
Highest reported value (Cell 2)	SS-RSRQ_64	SS-RSRQ_64	SS-RSRQ_64
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_47	SS-RSRQ_47	SS-RSRQ_47
Highest reported value (Cell 2)	SS-RSRQ_67	SS-RSRQ_67	SS-RSRQ_67

16.7.2.3.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for 1 Rx UE

16.7.2.3.2.1 Test purpose

To verify that the inter-frequency SS-RSRQ relative measurement accuracy is within the specified limits for all bands. This test will verify the requirements in TS 38.133[6] clause 10.1A.8.1.2.

16.7.2.3.2.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards.

16.7.2.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.2.3.

16.7.2.3.2.4 Test description

16.7.2.3.2.4.1 Initial conditions

Same as the initial conditions given in 6.7.2.2.2 with followings exceptions:

- Table 6.7.2.2.2.4.1-1 is replaced by Table 16.7.2.3.2.4.1-1;
- Table 6.7.2.2.2.4.1-2 is replaced by Table 16.7.2.3.2.4.1-2;

Table 16.7.2.3.2.4.1-1: Supported test configurations

Config	Description
16.7.2.3.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.2.3.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.2.3.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.2.3.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 16.7.2.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.2.3.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

16.7.2.3.2.4.2 Test procedure

Same as the test procedure in clause 6.7.2.2.2.4.2 with following exceptions:

- Table 6.7.2.2.2.5-1 is replaced by Table 16.7.2.3.1.5-1;
- Table 6.7.2.2.2.5-2 is replaced by Table 16.7.2.3.2.5-2.

16.7.2.3.2.4.3 Message contents

Same as the message contents in clause 6.7.2.2.2.4.3 with following exceptions:

- Table H.3.1-3 is used with associated condition SSB.1 RedCap FR1 for test configuration 16.7.2.3.2-3.

16.7.2.3.2.5 Test requirement

Same as the test requirements in clause 6.7.2.2.2.5 with followings exceptions:

- Table 6.7.2.2.2.5-1 is replaced by Table 16.7.2.3.1.5-1;
- Table 6.7.2.2.2.5-2 is replaced by Table 16.7.2.3.2.5-1.

Table 16.7.2.3.2.5-1: SS-RSRQ Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x - 9	SS-RSRQ_x - 9	SS-RSRQ_x - 13
Highest reported value (Cell 2)	SS-RSRQ_x + 9	SS-RSRQ_x + 9	SS-RSRQ_x + 4
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x - 11	SS-RSRQ_x - 11	SS-RSRQ_x -15
Highest reported value (Cell 2)	SS-RSRQ_x + 11	SS-RSRQ_x + 11	SS-RSRQ_x + 6
NOTE: SS-RSRQ_x is the reported value of Cell 1.			

16.7.2.4 Inter-frequency measurement accuracy for 2 Rx UE

16.7.2.4.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for 2 Rx UE

16.7.2.4.1.1 Test purpose

To verify that the inter-frequency SS-RSRQ absolute measurement accuracy is within the specified limits for all bands. This test will verify the requirements in TS 38.133[6] clause 10.1A.8.1.1

16.7.2.4.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

16.7.2.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.2.4.

16.7.2.4.1.4 Test description

16.7.2.4.1.4.1 Initial conditions

Same as the initial conditions given in 6.7.2.2.1 with followings exceptions:

- Table 6.7.2.2.1.4.1-1 is replaced by Table 16.7.2.4.1.4.1-1;
- Table 6.7.2.2.1.4.1-2 is replaced by Table 16.7.2.4.1.4.1-2;

Table 16.7.2.4.1.4.1-1: Supported test configurations

Config	Description
16.7.2.4.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.2.4.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.2.4.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.2.4.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 16.7.2.4.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.2.4.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

16.7.2.4.1.4.2 Test procedure

Same as the test procedure in clause 6.7.2.2.1.4.2 with followings exceptions:

- Table 6.7.2.2.1.5-1 is replaced by Table 16.7.2.4.1.5-1;
- Table 6.7.2.2.1.5-2 is replaced by Table 16.7.2.4.1.5-2.

16.7.2.4.1.4.3 Message contents

Same as the message contents in clause 6.7.2.2.1.4.3 with following exceptions:

- Table H.3.1-3 is used with associated condition SSB.1 RedCap FR1 for test configuration 16.7.2.4.1-3.

16.7.2.4.1.5 Test requirement

Same as the test requirements in clause 6.7.2.2.1.5 with followings exceptions:

- Table 6.7.2.2.1.5-1 is replaced by Table 16.7.2.4.1.5-1;
- Table 6.7.2.2.1.5-2 is replaced by Table 16.7.2.4.1.5-2;

Table 16.7.2.4.1.5-1: NR cell specific test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
Gap pattern ID			0					
BWP BW	Config 1,2,4	MHz	10: $N_{RB,c}$ = 52					
	Config 3		20: $N_{RB,c}$ = 51					
DRX Cycle		ms	Not Applicable					
PDSCH RMC	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS Configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OCNG pattern 1					
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3		SMTC.1					
SSB configuration	Config 1,2,4		SSB.1 FR1					
	Config 3		SSB.1 RedCap FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15					
	Config 3		30					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2	Config 1,2,4	dBm/ 15kHz	-81.68	-106	-116 + Δ_{BG_offset}	
	Config 3		-86.27	-113	-116 + Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4	dBm/ SCS	-81.68	-106	-116 + Δ_{BG_offset}	
	Config 3		-83.27	-110	-113 + Δ_{BG_offset}	
$\hat{E}_s / I_{ot}$		dB	-1.75	-1.75	3	-1.75
$\hat{E}_s / N_{oc}$		dB	-1.75	-1.75	3	-1.75
SS-RSRP Note3	Config 1,2,4	dBm/ SCS	-83.43	-107.75	-113+ Δ_{BG_offset}	-117.7+ Δ_{BG_offset}
	Config 3		-85.02	-111.75	-110+ Δ_{BG_offset}	-114.7+ Δ_{BG_offset}
SS-RSRQ Note3		dB	-14.77	-14.77	-12.56	-14.76
Io Note3	Config 1,2,4	dBm/ Ch BW	-51.51	-75.83	-83.28+ Δ_{BG_offset}	-85.83+ Δ_{BG_offset}
	Config 3		-53.17	-79.90	-80.36+ Δ_{BG_offset}	-82.90+ Δ_{BG_offset}
Propagation condition			AWGN			
Antenna configuration			1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in TS 38.133 [6] clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 16.7.2.4.1.5-2: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_52	SS-RSRQ_52	SS-RSRQ_52
Highest reported value (Cell 2)	SS-RSRQ_62	SS-RSRQ_62	SS-RSRQ_62
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_49	SS-RSRQ_49	SS-RSRQ_49
Highest reported value (Cell 2)	SS-RSRQ_65	SS-RSRQ_65	SS-RSRQ_65

16.7.2.4.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for 2 Rx UE

16.7.2.4.2.1 Test purpose

To verify that the inter-frequency SS-RSRQ relative measurement accuracy is within the specified limits for all bands. This test will verify the requirements in TS 38.133[6] clause 10.1A.8.1.2.

16.7.2.4.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

16.7.2.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.2.4.

16.7.2.4.2.4 Test description

16.7.2.4.2.4.1 Initial conditions

Same as the initial conditions given in 6.7.2.2.2 with followings exceptions:

- Table 6.7.2.2.2.4.1-1 is replaced by Table 16.7.2.4.2.4.1-1;
- Table 6.7.2.2.2.4.1-2 is replaced by Table 16.7.2.4.2.4.1-2;

Table 16.7.2.4.2.4.1-1: Supported test configurations

Config	Description
16.7.2.4.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.2.4.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.2.4.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.2.4.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 16.7.2.4.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.2.4.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

16.7.2.4.2.4.2 Test procedure

Same as the test procedure in clause 6.7.2.2.2.4.2 with followings exceptions:

- Table 6.7.2.2.2.5-1 is replaced by Table 16.7.2.4.1.5-1;
- Table 6.7.2.2.2.5-2 is replaced by Table 16.7.2.4.2.5-1.

16.7.2.4.2.4.3 Message contents

Same as the message contents in clause 6.7.2.2.2.4.3 with following exceptions:

- Table H.3.1-3 is used with associated condition SSB.1 RedCap FR1 for test configuration 16.7.2.4.2-3.

16.7.2.4.2.5 Test requirement

Same as the test requirements in clause 6.7.2.2.2.5 with followings exceptions:

- Table 6.7.2.2.2.5-1 is replaced by Table 16.7.2.4.1.5-1;

- Table 6.7.2.2.2.5-2 is replaced by Table 16.7.2.4.2.5-1;

Table 16.7.2.4.2.5-1: SS-RSRQ Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x - 7	SS-RSRQ_x - 7	SS-RSRQ_x - 11
Highest reported value (Cell 2)	SS-RSRQ_x + 7	SS-RSRQ_x + 7	SS-RSRQ_x + 2
Extreme Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_x - 9	SS-RSRQ_x - 9	SS-RSRQ_x - 13
Highest reported value (Cell 2)	SS-RSRQ_x + 9	SS-RSRQ_x + 9	SS-RSRQ_x + 4
NOTE: SS-RSRQ_x is the reported value of Cell 1.			

16.7.3 SS-SINR for RedCap

16.7.3.0 Minimum conformance requirements

16.7.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements

When RedCap UE is capable of 2Rx, the minimum requirements given in clause 4.7.3.0.1 shall apply.

When RedCap UE is only required to support 1Rx, the absolute accuracy requirements in Table 16.7.3.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to TS 38.133 [6] Annex B.2.15 for a corresponding Band for each relevant SSB.

Table 16.7.3.0.1-1: SS-SINR Intra frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 3	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.0	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB Ês/Iot ≤ 25 dB under non-HST scenarios.
NOTE 4: NR operating band groups in FR1 are as defined in TS 38.133 [6] clause 3.5.2.
NOTE 5: The requirements apply for SSB Ês/Iot ≤5 dB with SCS 15kHz or 30kHz under NR high speed scenarios.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.10.1.1.

16.7.3.0.2 Inter-frequency SS-SINR absolute measurement accuracy requirements

When RedCap UE is capable of 2Rx, the minimum requirements given in clause 4.7.3.0.2 shall apply.

When RedCap UE is only required to support 1Rx, the absolute accuracy requirements in Table 16.7.3.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to TS 38.133 [6] Annex B.2.16 for a corresponding Band for each relevant SSB.

Table 16.7.3.0.2-1: SS-SINR Inter frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}s/Iot$ Note 3	Io Note 1 range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz		
±4.0	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4.5	±5	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB $\hat{E}s/Iot \leq 25$ dB.
NOTE 4: NR operating band groups in FR1 are as defined in TS 38.133 [6] clause 3.5.2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.12.1.1.

16.7.3.0.3 Inter-frequency SS-SINR relative measurement accuracy requirements

When RedCap UE is capable of 2Rx, the minimum requirements given in clause 4.7.3.0.3 shall apply.

When RedCap UE is only required to support 1Rx, the relative accuracy requirements in Table 16.7.3.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to TS 38.133 [6] Annex B.2.16 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- |Channel 1_Io -Channel 2_Io | ≤ 20 dB

Table 16.7.3.0.3-1: SS-SINR Inter frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2,4	Io Note 1 range				
			NR operating band groups Note 5	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS_{SSB}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{SSB} = 120 kHz	SCS_{SSB} = 240 kHz		
±4.5	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±5	±5	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: The requirements apply for SSB Ês/Iot ≤ [25] dB.
NOTE 5: NR operating band groups in FR1 are as defined in TS 38.133 [6] clause 3.5.2.

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.12.1.2.

16.7.3.1 NR SA FR1 SS-SINR absolute measurement accuracy for 1 Rx UE

16.7.3.1.1 Test purpose

To verify that the intra-frequency SS-SINR absolute measurement accuracy is within the specified limits for all bands. This test will verify the requirements in TS 38.133[6] clause 10.1A.10.1.1

16.7.3.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards and supporting SS-SINR measurement.

16.7.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.3.1.

16.7.3.1.4 Test description

16.7.3.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.3.1.4.1 with followings exceptions:

- Table 6.7.3.1.4.1-1 is replaced by Table 16.7.3.1.4.1-1;
- Table 6.7.3.1.4.1-2 is replaced by Table 16.7.3.1.4.1-2;

Table 16.7.3.1.4.1-1: Supported test configurations

Config	Description
16.7.3.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.3.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.3.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.3.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 16.7.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.3.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

16.7.3.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.3.1.4.2 with following exceptions:

- Table 6.7.3.1.5-1 is replaced by Table 16.7.3.1.5-1;
- Table 6.7.3.1.5-2 is replaced by Table 16.7.3.1.5-2.

16.7.3.1.4.3 Message contents

Same as the message contents given in clause 6.7.3.1.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.3.1-1 applies to test configuration 16.7.3.1-4.

Table 16.7.3.1.4.3-1: *RLC-Config*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-149			
Information Element	**Value/remark**	**Comment**	**Condition**
RLC-Config ::= CHOICE {			
am SEQUENCE {			
ul-AM-RLC SEQUENCE {			
maxRetxThreshold	t32		SRB1
}			
}			
}			

16.7.3.1.5 Test requirement

Same as the test requirements given in clause 6.7.3.1.5 with followings exceptions:

- Table 6.7.3.1.5-1 is replaced by Table 16.7.3.1.5-1;
- Table 6.7.3.1.5-2 is replaced by Table 16.7.3.1.5-2;

Table 16.7.3.1.5-1: NR cell specific test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1		freq1	

Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH RMC	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET RMC	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
SMTC configuration	Config 1,4		SMTC.2			
	Config 2,3		SMTC.1			
Time offset with Cell 1	Config 1,4	ms	-	3	-	3
	Config 2,3	µs	-	3	-	3
SSB configuration	Config 1,2,4		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2		dBm/15kHz	-93		-116 + Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4	dBm/SCS	-93		-116 + Δ_{BG_offset}	
	Config 3		-90		-113 + Δ_{BG_offset}	
$\hat{E}_s / I_{ot}$		dB	0	-3.19	-5.10	-5.10
$\hat{E}_s / N_{oc}$		dB	4.54	2.66	-3.50	-3.50
SS-RSRP Note3	Config 1,2,4	dBm/SCS	-88.46	-90.34	-119.50 + Δ_{BG_offset}	-119.50 + Δ_{BG_offset}
	Config 3		-85.46	-87.34	-116.50 + Δ_{BG_offset}	-116.50 + Δ_{BG_offset}
SS-SINR Note3		dB	0	-3.19	-5.10	-5.10
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-57.5		-85.28 + Δ_{BG_offset}	
	Config 3	dBm/ 18.36MHz	-54.57		-82.35 + Δ_{BG_offset}	
Propagation condition		-	AWGN			
Antenna configuration		-	1x1			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in TS 38.133 [6] clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 16.7.3.1.5-2: SS-SINR Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 2)	SINR_29	SINR_26
Highest reported value (Cell 2)	SINR_51	SINR_47
Extreme Conditions		
Lowest reported value (Cell 2)	SINR_28	SINR_25
Highest reported value (Cell 2)	SINR_52	SINR_48

16.7.3.2 NR SA FR1 SS-SINR absolute measurement accuracy for 2 Rx UE

16.7.3.2.1 Test purpose

To verify that the intra-frequency SS-SINR absolute measurement accuracy is within the specified limits for all bands. This test will verify the requirements in TS 38.133[6] clause 10.1A.10.1.1

16.7.3.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards and supporting SS-SINR measurement.

16.7.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.3.2.

16.7.3.2.4 Test description

16.7.3.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.3.1.4.1 with followings exceptions:

- Table 6.7.3.1.4.1-1 is replaced by Table 16.7.3.2.4.1-1;
- Table 6.7.3.1.4.1-2 is replaced by Table 16.7.3.2.4.1-2;

Table 16.7.3.2.4.1-1: Supported test configurations

Config	Description
16.7.3.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.3.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.3.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.3.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 16.7.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.3.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

16.7.3.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.3.1.4.2 with following exceptions:

- Table 6.7.3.1.5-1 is replaced by Table 16.7.3.2.5-1;
- Table 6.7.3.1.5-2 is replaced by Table 16.7.3.2.5-2.

16.7.3.2.4.3 Message contents

Same as the message contents given in clause 6.7.3.1.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.3.1-1 applies to test configuration 16.7.3.2-4.

16.7.3.2.5 Test requirement

Same as the test requirements given in clause 6.7.3.1.5 with followings exceptions:

- Table 6.7.3.1.5-1 is replaced by Table 16.7.3.2.5-1;
- Table 6.7.3.1.5-2 is replaced by Table 16.7.3.2.5-2;

Table 16.7.3.2.5-1: NR cell specific test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH RMC	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET RMC	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD	

Dedicated CORESET RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
SMTC configuration	Config 1,4		SMTC.2			
	Config 2,3		SMTC.1			
Time offset with Cell 1	Config 1,4	ms	-	3	-	3
	Config 2,3	µs	-	3	-	3
SSB configuration	Config 1,2,4		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2		dBm/15kHz	-93		-116 + Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4	dBm/SCS	-93		-116 + Δ_{BG_offset}	
	Config 3		-90		-113 + Δ_{BG_offset}	
$\hat{E}_s / I_{ot}$		dB	0	-3.19	-5.10	-5.10
$\hat{E}_s / N_{oc}$		dB	4.54	2.66	-3.50	-3.50
SS-RSRP Note3	Config 1,2,4	dBm/SCS	-88.46	-90.34	-119.50 + Δ_{BG_offset}	-119.50 + Δ_{BG_offset}
	Config 3		-85.46	-87.34	-116.50 + Δ_{BG_offset}	-116.50 + Δ_{BG_offset}
SS-SINR Note3		dB	0	-3.19	-5.10	-5.10
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-57.5		-85.28 + Δ_{BG_offset}	
	Config 3	dBm/ 18.36MHz	-54.57		-82.35 + Δ_{BG_offset}	
Propagation condition		-	AWGN			
Antenna configuration		-	1x2			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in TS 38.133 [6] clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 16.7.3.2.5-2: SS-SINR Intra frequency absolute accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest reported value (Cell 2)	SINR_31	SINR_28
Highest reported value (Cell 2)	SINR_49	SINR_45
Extreme Conditions		
Lowest reported value (Cell 2)	SINR_30	SINR_27

Highest reported value (Cell 2)	SINR_50	SINR_46

16.7.3.3 Inter-frequency measurement accuracy for 1 Rx UE

16.7.3.3.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy for 1 Rx UE

16.7.3.3.1.1 Test purpose

To verify that the inter-frequency SS-SINR absolute measurement accuracy is within the specified limits for all bands. This test will verify the requirements in TS 38.133[6] clause 10.1A.12.1.1

16.7.3.3.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards and supporting SS-SINR measurement.

16.7.3.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.3.3.

16.7.3.3.1.4 Test description

16.7.3.3.1.4.1 Initial conditions

Same as the initial conditions given in 6.7.3.2.1.4.1 with followings exceptions:

- Table 6.7.3.2.1.4.1-1 is replaced by Table 16.7.3.3.1.4.1-1;
- Table 6.7.3.2.1.4.1-2 is replaced by Table 16.7.3.3.1.4.1-2;

Table 16.7.3.3.1.4.1-1: Supported test configurations

Config	Description
16.7.3.3.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.3.3.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.3.3.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.3.3.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 16.7.3.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.3.3.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

16.7.3.3.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.3.2.1.4.2 with following exceptions:

- Table 6.7.3.2.1.5-1 is replaced by Table 16.7.3.3.1.5-1;

- Table 6.7.3.2.1.5-2 is replaced by Table 16.7.3.3.1.5-2;

16.7.3.3.1.4.3 Message contents

Same as the message contents given in clause 6.7.3.2.1.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.3.2.1-1 applies to test configuration 16.7.3.3.1-4.

16.7.3.3.1.5 Test requirement

Same as the test requirements in clause 6.7.3.2.1.5 with followings exceptions:

- Table 6.7.3.2.1.5-1 is replaced by Table 16.7.3.3.1.5-1;
- Table 6.7.3.2.1.5-2 is replaced by Table 16.7.3.3.1.5-2;

Table 16.7.3.3.1.5-1: NR cell specific test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH RMC	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3		SMTC.1					
SSB configuration	Config 1,2,4		SSB.1 FR1					

	Config 3		SSB.1 RedCap FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15		
	Config 3		30		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS Note 1					
EPRE ratio of OCNG to OCNG DMRS Note 1					
N_{oc} Note2		dBm/ 15kHz	-88	-108.5	-119.5 + Δ_{BG_offset}
N_{oc} Note2	Config 1,2,4	dBm/ SCS	-88	-108.5	-119.5 + Δ_{BG_offset}
	Config 3		-85	-105.5	-116.5 + Δ_{BG_offset}
$\hat{E}_s / I_{ot}$		dB	-1.75	20	-3.65
$\hat{E}_s / N_{oc}$		dB	-1.75	20	-3.65
SS-RSRP Note3	Config 1,2,4	dBm/ SCS	-89.75	-88.50	-123.15 + Δ_{BG_offset}
	Config 3		-86.75	-85.50	-120.15 + Δ_{BG_offset}
SS-SINR Note3		dB	-1.75	20	-3.65
Io Note3	Config 1,2,4	dBm/ 9.36MHz	-57.83	-60.50	-89.99 + Δ_{BG_offset}
	Config 3	dBm/ 18.36MHz	-54.90	-57.57	-87.06 + Δ_{BG_offset}
Propagation condition		-	AWGN		
Antenna configuration		-	1x1		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: NR operating band groups are as defined in TS 38.133 [6] clause 3.5.2.
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 16.7.3.3.1.5-2: SS-SINR Inter frequency absolute accuracy requirements for the reported values

	Test 1	**Test 2**	**Test 3**
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SINR_34	SINR_78	SINR_30
Highest reported value (Cell 2)	SINR_52	SINR_95	SINR_49
Extreme Conditions			
Lowest reported value (Cell 2)	SINR_32	SINR_76	SINR_29
Highest reported value (Cell 2)	SINR_54	SINR_97	SINR_50

16.7.3.3.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy for 1 Rx UE

16.7.3.3.2.1 Test purpose

To verify that the inter-frequency SS-SINR relative measurement accuracy is within the specified limits for all bands. This test will verify the requirements in TS 38.133[6] clause 10.1A.12.1.2.

16.7.3.3.2.2 Test applicability

This test applies to all types of NR RedCap UE with 1Rx from Release 17 onwards and supporting SS-SINR measurement.

16.7.3.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.3.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.3.3.

16.7.3.3.2.4 Test description

16.7.3.3.2.4.1 Initial conditions

Same as the initial conditions given in 6.7.3.2.2 with followings exceptions:

- Table 6.7.3.2.2.4.1-1 is replaced by Table 16.7.3.3.2.4.1-1;
- Table 6.7.3.2.2.4.1-2 is replaced by Table 16.7.3.3.2.4.1-2;

Table 16.7.3.3.2.4.1-1: Supported test configurations

Config	Description
16.7.3.3.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.3.3.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.3.3.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.3.3.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 16.7.3.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.3.3.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram			

16.7.3.3.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.3.2.2.4.2 with following exceptions:

- Table 6.7.3.2.2.5-1 is replaced by Table 16.7.3.3.1.5-1;
- Table 6.7.3.2.2.5-2 is replaced by Table 16.7.3.3.2.5-1;

16.7.3.3.2.4.3 Message contents

Same as the message contents given in clause 6.7.3.2.2.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.3.2.2-1 applies to test configuration 16.7.3.3.2-4.

16.7.3.3.2.5 Test requirement

Same as the test requirements given in clause 6.7.3.2.2.5 with followings exceptions:

- Table 6.7.3.2.2.5-1 is replaced by Table 16.7.3.3.1.5-1;

- Table 6.7.3.2.2.5-2 is replaced by Table 16.7.3.3.2.5-1;

Table 16.7.3.3.2.5-1: SS-SINR Inter frequency relative accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-SINR_x - 10	SS-SINR_x - 10	SS-SINR_x - 11
Highest reported value (Cell 2)	SS-SINR_x + 10	SS-SINR_x + 10	SS-SINR_x + 11
Extreme Conditions			
Lowest reported value (Cell 2)	SS-SINR_x -11	SS-SINR_x - 11	SS-SINR_x - 11
Highest reported value (Cell 2)	SS-SINR_x + 11	SS-SINR_x + 11	SS-SINR_x + 11
NOTE: SS-SINR_x is the reported value of Cell 1.			

16.7.3.4 Inter-frequency measurement accuracy for 2 Rx UE

16.7.3.4.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy for 2 Rx UE

16.7.3.4.1.1 Test purpose

To verify that the inter-frequency SS-SINR absolute measurement accuracy is within the specified limits for all bands. This test will verify the requirements in TS 38.133[6] clause 10.1A.12.1.1

16.7.3.4.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards and supporting SS-SINR measurement.

16.7.3.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.3.4.

16.7.3.4.1.4 Test description

16.7.3.4.1.4.1 Initial conditions

Same as the initial conditions given in 6.7.3.2.1 with followings exceptions:

- Table 6.7.3.2.1.4.1-1 is replaced by Table 16.7.3.4.1.4.1-1;
- Table 6.7.3.2.1.4.1-2 is replaced by Table 16.7.3.4.1.4.1-2;

Table 16.7.3.4.1.4.1-1: Supported test configurations

Config	Description
16.7.3.4.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.3.4.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.3.4.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.3.4.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 16.7.3.4.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 16.7.3.4.1.4.1-1	

Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

16.7.3.4.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.3.2.1.4.2 with following exceptions:

- Table 6.7.3.2.1.5-1 is replaced by Table 16.7.3.4.1.5-1;
- Table 6.7.3.2.1.5-2 is replaced by Table 16.7.3.4.1.5-2;

16.7.3.4.1.4.3 Message contents

Same as the message contents given in clause 6.7.3.2.1.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.3.2.1-1 applies to test configuration 16.7.3.4.1-4.

16.7.3.4.1.5 Test requirement

Same as the test requirements in clause 6.7.3.2.1.5 with followings exceptions:

- Table 6.7.3.2.1.5-1 is replaced by Table 16.7.3.4.1.5-1;
- Table 6.7.3.2.1.5-2 is replaced by Table 16.7.3.4.1.5-2;

Table 16.7.3.4.1.5-1: NR cell specific test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH RMC	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	

	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3		SMTC.1					
SSB configuration	Config 1,2,4		SSB.1 FR1					
	Config 3		SSB.1 RedCap FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15					
	Config 3		30					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS Note 1								
EPRE ratio of OCNG to OCNG DMRS Note 1								
N_{oc} Note2		dBm/15kHz	-88		-108.5		-119.5 + Δ_{BG_offset}	
N_{oc} Note2	Config 1,2,4	dBm/SCS	-88		-108.5		-119.5 + Δ_{BG_offset}	
	Config 3		-85		-105.5		-116.5 + Δ_{BG_offset}	
$\hat{E}_s / I_{ot}$		dB	-1.75		20		-3.20	
$\hat{E}_s / N_{oc}$		dB	-1.75		20		-3.20	
SS-RSRP Note3	Config 1,2,4	dBm/SCS	-89.75		-88.5		-122.7 + Δ_{BG_offset}	
	Config 3		-86.75		-85.5		-119.7 + Δ_{BG_offset}	
SS-SINR Note3		dB	-1.75		20		-3.20	
Io Note3	Config 1,2,4	dBm/9.36MHz	-57.83		-60.5		-89.85 + Δ_{BG_offset}	
	Config 3	dBm/18.36MHz	-54.87		-57.57		-86.92 + Δ_{BG_offset}	
Propagation condition		-	AWGN					
Antenna configuration		-	1x2					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: NR operating band groups are as defined in TS 38.133 [6] clause 3.5.2.

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

Table 16.7.3.4.1.5-2: SS-SINR Inter frequency absolute accuracy requirements for the reported values

	Test 1	Test 2	Test 3
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SINR_35	SINR_79	SINR_32
Highest reported value (Cell 2)	SINR_51	SINR_94	SINR_49

Extreme Conditions			
Lowest reported value (Cell 2)	SINR_33	SINR_77	SINR_31
Highest reported value (Cell 2)	SINR_53	SINR_96	SINR_40

16.7.3.4.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy for 2 Rx UE

16.7.3.4.2.1 Test purpose

To verify that the inter-frequency SS-SINR relative measurement accuracy is within the specified limits for all bands. This test will verify the requirements in TS 38.133[6] clause 10.1A.12.1.2.

16.7.3.4.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards and supporting SS-SINR measurement.

16.7.3.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.3.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.3.4.

16.7.3.4.2.4 Test description

16.7.3.4.2.4.1 Initial conditions

Same as the initial conditions given in 6.7.3.2.2 with followings exceptions:

- Table 6.7.3.2.2.4.1-1 is replaced by Table 16.7.3.4.2.4.1-1;
- Table 6.7.3.2.2.4.1-2 is replaced by Table 16.7.3.4.2.4.1-2;

Table 16.7.3.4.2.4.1-1: Supported test configurations

Config	Description
16.7.3.4.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.3.4.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.3.4.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.3.4.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 16.7.3.4.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.3.4.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram			

16.7.3.4.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.3.2.2.4.2 with following exceptions:

- Table 6.7.3.2.2.5-1 is replaced by Table 16.7.3.4.1.5-1;

- Table 6.7.3.2.2.5-2 is replaced by Table 16.7.3.4.2.5-1.

16.7.3.4.2.4.3 Message contents

Same as the message contents given in clause 6.7.3.2.2.4.3 with following exceptions:

- Specific message contents exceptions for test configuration 6.7.3.2.2-1 applies to test configuration 16.7.3.4.2-4.

16.7.3.4.2.5 Test requirement

Same as the test requirements in clause 6.7.3.2.2.5 with followings exceptions:

- Table 6.7.3.2.2.5-1 is replaced by Table 16.7.3.4.1.5-1;
- Table 6.7.3.2.2.5-2 is replaced by Table 16.7.3.4.2.5-1;

Table 16.7.3.4.2.5-1: SS-SINR Inter frequency relative accuracy requirements for the reported values

	Test 1	**Test 2**	**Test 3**
	All bands	All bands	All bands
Normal Conditions			
Lowest reported value (Cell 2)	SS-SINR_x - 10	SS-SINR_x - 10	SS-SINR_x - 11
Highest reported value (Cell 2)	SS-SINR_x + 10	SS-SINR_x + 10	SS-SINR_x + 11
Extreme Conditions			
Lowest reported value (Cell 2)	SS-SINR_x - 11	SS-SINR_x - 11	SS-SINR_x - 11
Highest reported value (Cell 2)	SS-SINR_x + 11	SS-SINR_x + 11	SS-SINR_x + 11
NOTE: SS-SINR_x is the reported value of Cell 1.			

16.7.4 L1-RSRP measurement for beam reporting for RedCap

16.7.4.0 Minimum conformance requirements

16.7.4.0.1 SSB based absolute L1-RSRP measurement accuracy requirements

When RedCap UE is capable of 2Rx, the minimum requirements given in clause 4.7.4.0.1 shall apply.

When RedCap UE is only required to support 1Rx, the absolute accuracy requirements in Table 16.7.4.0.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to TS 38.133 [6] Annex B.4.1 for a corresponding Band for each relevant SSB.

Table 16.7.4.0.1-1: SSB based L1-RSRP absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot**	**Io [Note 1] range**				
			NR operating band groups [Note 2]	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±8.0	±12.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70

			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±11.5	±14.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H,	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.14.1.1.

16.7.4.0.2 SSB based relative L1-RSRP measurement accuracy requirements

When RedCap UE is capable of 2Rx, the minimum requirements given in clause 4.7.4.0.2 shall apply.

When RedCap UE is only required to support 1Rx, the relative accuracy requirements in Table 16.7.4.0.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to TS 38.133 [6] Annex B.4.1 for a corresponding Band for each relevant SSB.

Table 16.7.4.0.2-1: SSB based L1-RSRP relative accuracy for 1Rx RedCap UE in FR1

Accuracy		**Conditions**					
Normal condition	**Extreme condition**	**SSB Ês/Iot** Note 2	**Io** Note 1 **range**				
			NR operating band groups Note 4	**Minimum Io**			**Maximum Io**
dB	**dB**	**dB**		**dBm / SCS_{SSB}**		**dBm/$BW_{Channel}$**	**dBm/$BW_{Channel}$**
				SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**		
±6	±7	≥-3	NR_FDD_FR1_A NR_TDD_FR1_A NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB Ês/Iot is the minimum SSB Ês/Iot of the pair of SSBs to which the requirement applies. NOTE 3: Void NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

The normative reference for this requirement is TS 38.133 [6] clauses 10.1A.14.1.2.

16.7.4.0.3 CSI-RS based absolute L1-RSRP measurement accuracy requirements

The accuracy requirements in clause 4.7.4.0.3 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 16.7.4.0.3-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to TS 38.133 [6] Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 16.7.4.0.3-1.

Table 16.7.4.0.3-1: CSI-RS based L1-RSRP absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io [Note 1] range					
			NR operating band groups [Note 2]	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±8.0	±12.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±11.5	±14.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3A.4.

16.7.4.0.4 CSI-RS based relative L1-RSRP measurement accuracy requirementsThe accuracy requirements in clause 4.7.4.0.4 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 16.7.4.0.4-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [2] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to TS 38.133 [6] Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 16.7.4.0.4-1.

Table 16.7.4.0.4-1: CSI-RS based L1-RSRP relative accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot Note 2	Io Note 1 range					
			NR operating band groups Note 4	Minimum Io				Maximum Io
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/$BW_{Channel}$	dBm/$BW_{Channel}$
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
±6	±7	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: Void
NOTE 4: NR operating band groups in FR1 are as defined in clause 3A.4.

16.7.4.1 SSB based L1-RSRP measurements for 1 Rx UE

16.7.4.1.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for 1 Rx UE

16.7.4.1.1.1 Test purpose

To verify that the SSB based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

16.7.4.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.7.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.4.1.

16.7.4.1.1.4 Test description

16.7.4.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.4.1.1.4.1 with following exceptions:

- Table 6.7.4.1.1.4.1-1 is replaced by Table 16.7.4.1.1.4.1-1;
- Table 6.7.4.1.1.4.1-2 is replaced by Table 16.7.4.1.1.4.1-2;

Table 16.7.4.1.1.4.1-1: Supported test configurations

Test Config	Description
16.7.4.1.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.4.1.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.4.1.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.4.1.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.4.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

16.7.4.1.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.1.1.4.2.

16.7.4.1.1.4.3 Message contents

Same as the message contents given in clause 6.7.4.1.1.4.3.

16.7.4.1.1.5 Test requirement

Same as the thest requirements given in clause 6.7.4.1.1.5 with following exceptions:

- Table 6.7.4.1.1.5-1 is replaced by Table 16.7.4.1.1.5-1;
- Table 6.7.4.1.1.5-2 is replaced by Table 16.7.4.1.1.5-2;
- Table 6.7.4.1.1.5-3 is replaced by Table 16.7.4.1.1.5-3;

Table 16.7.4.1.1.5-1: Cell specific test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~4		freq1	
Duplex mode	1		FDD	
	2,3		TDD	
	4		HD-FDD	
TDD Configuration	1,4		N/A	
	2		TDDConf.1.1	
	3		TDDConf.2.1	
$BW_{channel}$	1,2,4	MHz	10: $N_{RB,c}$ = 52	
	3		20: $N_{RB,c}$ = 51	
PDSCH RMC	1,4		SR.1.1 FDD	
	2		SR.1.1 TDD	
	3		SR.2.1 TDD	
RMSI CORESET RMC	1,4		CR.1.1 FDD	
	2		CR.1.1 TDD	

	3		CR.2.1 TDD	
Dedicated CORESET RMC	1,4		CCR.1.1 FDD	
	2		CCR.1.1 TDD	
	3		CCR.2.1 TDD	
SSB configuration	1,2,4		SSB.3 FR1	
	3		SSB.2 RedCap FR1	
OCNG Patterns	1~4		OP.1	
TRS configuration	1,4		TRS.1.1 FDD	
	2		TRS.1.1 TDD	
	3		TRS.1.2 TDD	
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	1~4		SMTC.1	
reportConfigType	1~4		periodic	
reportQuantity	1~4		ssb-Index-RSRP	
Number of reported RS	1~4		2	
L1-RSRP reporting period	1~4		slot80	
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1	1~4	dB	0	
N_{oc} ote2	1~4	dBm/ 15kHz	-94.65	-117+ Δ_{BG_offset}
N_{oc} Note2	1,2,4	dBm/ SCS	-94.65	-117+ Δ_{BG_offset}
	3		-91.65	-114+ Δ_{BG_offset}
$\hat{E}_s / I_{ot}$	1~4	dB	10	-2.65
SS-RSRP Note3	1,2,4	dBm/ SCS	-84.65	-119.65 + Δ_{BG_offset}
	3		-81.65	-116.65 + Δ_{BG_offset}
Io Note3	1,2,4	dBm/ 9.36 MHz	-56.28	-87.16 + Δ_{BG_offset}
	3	dBm/ 18.36 MHz	-53.36	-84.24 + Δ_{BG_offset}
$\hat{E}_s / N_{oc}$	1~4	dB	10	-2.65
Propagation condition	1~4		AWGN	
Antenna configuration	1~4		1x1	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 16.7.4.1.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2 and 4

Normal Conditions	Test 1 All bands	Band Group	Test 2
Lowest reported value (Cell 1)	RSRP_59	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_27
		NR_FDD_FR1_B	RSRP_28
		NR_TDD_FR1_C	RSRP_28
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_29
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_29
		NR_FDD_FR1_F	RSRP_30
		NR_FDD_FR1_G	RSRP_30
		NR_FDD_FR1_H	RSRP_31
Highest reported value (Cell 1)	RSRP_85	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_46
		NR_FDD_FR1_B	RSRP_47
		NR_TDD_FR1_C	RSRP_47
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_48
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_48
		NR_FDD_FR1_F	RSRP_49
		NR_FDD_FR1_G	RSRP_49
		NR_FDD_FR1_H	RSRP_50
Extreme Conditions	**Test 1 All bands**	**Band Group**	**Test 2**
Lowest reported value (Cell 1)	RSRP_56	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_23
		NR_FDD_FR1_B	RSRP_23
		NR_TDD_FR1_C	RSRP_24
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_24
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_25
		NR_FDD_FR1_F	RSRP_25
		NR_FDD_FR1_G	RSRP_26
		NR_FDD_FR1_H	RSRP_26
Highest reported value (Cell 1)	RSRP_88	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_51
		NR_FDD_FR1_B	RSRP_51
		NR_TDD_FR1_C	RSRP_52
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_52
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_53
		NR_FDD_FR1_F	RSRP_53
		NR_FDD_FR1_G	RSRP_54
		NR_FDD_FR1_H	RSRP_54
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 16.7.4.1.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 3

Normal Conditions	Test 1 All bands	Band Group	Test 2

Lowest reported value (Cell 1)	RSRP_62	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_30
		NR_FDD_FR1_B	RSRP_31
		NR_TDD_FR1_C	RSRP_31
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_32
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_32
		NR_FDD_FR1_F	RSRP_33
		NR_FDD_FR1_G	RSRP_33
		NR_FDD_FR1_H	RSRP_34
Highest reported value (Cell 1)	RSRP_88	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_49
		NR_FDD_FR1_B	RSRP_50
		NR_TDD_FR1_C	RSRP_50
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_51
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_51
		NR_FDD_FR1_F	RSRP_52
		NR_FDD_FR1_G	RSRP_52
		NR_FDD_FR1_H	RSRP_53
Extreme Conditions	**Test 1 All bands**	**Band Group**	**Test 2**
Lowest reported value (Cell 1)	RSRP_59	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_26
		NR_FDD_FR1_B	RSRP_26
		NR_TDD_FR1_C	RSRP_27
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_27
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_28
		NR_FDD_FR1_F	RSRP_28
		NR_FDD_FR1_G	RSRP_29
		NR_FDD_FR1_H	RSRP_29
Highest reported value (Cell 1)	RSRP_91	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_54
		NR_FDD_FR1_B	RSRP_54
		NR_TDD_FR1_C	RSRP_55
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_55
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_56
		NR_FDD_FR1_F	RSRP_56
		NR_FDD_FR1_G	RSRP_57
		NR_FDD_FR1_H	RSRP_57
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

16.7.4.1.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy for 1 Rx UE

16.7.4.1.2.1 Test purpose

To verify that the SSB based L1-RSRP relative measurement accuracy is within the specified limits for all bands.

16.7.4.1.2.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.7.4.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.4.1.

16.7.4.1.2.4 Test description

16.7.4.1.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.4.1.1.4.1 with following exceptions:

- Table 6.7.4.1.2.4.1-1 is replaced by Table 16.7.4.1.2.4.1-1;
- Table 6.7.4.1.2.4.1-2 is replaced by Table 16.7.4.1.2.4.1-2;

Table 16.7.4.1.2.4.1-1: Supported test configurations

Test Config	Description
16.7.4.1.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.4.1.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.4.1.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.4.1.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.4.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.4.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

16.7.4.1.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.1.2.4.2.

16.7.4.1.2.4.3 Message contents

Same as the message contents given in clause 6.7.4.1.2.4.3.

16.7.4.1.2.5 Test requirement

Same as the thest requirements given in clause 6.7.4.1.2.5 with following exceptions:

- Table 6.7.4.1.2.5-1 is replaced by Table 16.7.4.1.1.5-1;
- Table 6.7.4.1.2.5-2 is replaced by Table 16.7.4.1.2.5-2.

Table 16.7.4.1.2.5-1: Void

Table 16.7.4.1.2.5-2: L1-RSRP relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	3	3
Extreme Conditions		

Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	3	3

16.7.4.2 SSB based L1-RSRP measurements for 2 Rx UE

16.7.4.2.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for 2 Rx UE

16.7.4.2.1.1 Test purpose

To verify that the SSB based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

16.7.4.2.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.7.4.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.4.2.

16.7.4.2.1.4 Test description

16.7.4.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.4.1.1.4.1 with following exceptions:

- Table 6.7.4.1.1.4.1-1 is replaced by Table 16.7.4.2.1.4.1-1;
- Table 6.7.4.1.1.4.1-2 is replaced by Table 16.7.4.2.1.4.1-2;

Table 16.7.4.2.1.4.1-1: Supported test configurations

Test Config	Description
16.7.4.2.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.4.2.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.4.2.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.4.2.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.4.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.4.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

16.7.4.2.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.1.1.4.2.

16.7.4.2.1.4.3 Message contents

Same as the message contents given in clause 6.7.4.1.1.4.3.

16.7.4.2.1.5 Test requirement

Same as the thest requirements given in clause 6.7.4.1.1.5 with following exceptions:

- Table 6.7.4.1.1.5-1 is replaced by Table 16.7.4.2.1.5-1;
- Table 6.7.4.1.1.5-2 is replaced by Table 16.7.4.2.1.5-2;

Table 16.7.4.2.1.5-1: Cell specific test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~4		freq1	
Duplex mode	1		FDD	
	2,3		TDD	
	4		HD-FDD	
TDD Configuration	1,4		N/A	
	2		TDDConf.1.1	
	3		TDDConf.2.1	
$BW_{channel}$	1,2,4	MHz	10: $N_{RB,c}$ = 52	
	3		20: $N_{RB,c}$ = 51	
PDSCH RMC	1,4		SR.1.1 FDD	
	2		SR.1.1 TDD	
	3		SR.2.1 TDD	
RMSI CORESET RMC	1,4		CR.1.1 FDD	
	2		CR.1.1 TDD	
	3		CR.2.1 TDD	
Dedicated CORESET RMC	1,4		CCR.1.1 FDD	
	2		CCR.1.1 TDD	
	3		CCR.2.1 TDD	
SSB configuration	1,2,4		SSB.3 FR1	
	3		SSB.2 RedCap FR1	
OCNG Patterns	1~4		OP.1	
TRS configuration	1,4		TRS.1.1 FDD	
	2		TRS.1.1 TDD	
	3		TRS.1.2 TDD	
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	1~4		SMTC.1	
reportConfigType	1~4		periodic	
reportQuantity	1~4		ssb-Index-RSRP	
Number of reported RS	1~4		2	
L1-RSRP reporting period	1~4		slot80	
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1	1~4	dB	0	
N_{oc} Note2	1,2,4	dBm/ 15kHz	-94.65	-117+ Δ_{BG_offset}

	3		-94.65	
N_{oc} Note2	1,2,4	dBm/ SCS	-94.65	-117+ Δ_{BG_offset}
	3		-91.65	-114+ Δ_{BG_offset}
$\hat{E}_s / I_{ot}$	1~4	dB	10	-2.2
SS-RSRP Note3	1,2,4	dBm/ SCS	-84.65	-119.2 + Δ_{BG_offset}
	3		-81.65	-116.2 + Δ_{BG_offset}
Io Note3	1,2,4	dBm/ 9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
	3	dBm/ 18.36 MHz	-53.36	-84.07 + Δ_{BG_offset}
$\hat{E}_s / N_{oc}$	1~4	dB	10	-2.2
Propagation condition	1~4		AWGN	
Antenna configuration and Correlation matrix	1~4		1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 16.7.4.2.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2 and 4

Normal Conditions	Test 1 All bands	Band group	Test 2
Lowest reported value (Cell 1)	RSRP_62	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_31
		NR_FDD_FR1_B	RSRP_31
		NR_TDD_FR1_C	RSRP_32
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_32
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_33
		NR_FDD_FR1_F	RSRP_33
		NR_FDD_FR1_G	RSRP_34
		NR_FDD_FR1_H	RSRP_34
Highest reported value (Cell 1)	RSRP_82	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_44
		NR_FDD_FR1_B	RSRP_45
		NR_TDD_FR1_C	RSRP_45
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_46

		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_46
		NR_FDD_FR1_F	RSRP_47
		NR_FDD_FR1_G	RSRP_47
		NR_FDD_FR1_H	RSRP_48
Extreme Conditions	**Test 1 All bands**	**Band group**	**Test 2**
Lowest reported value (Cell 1)	RSRP_59	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_26
		NR_FDD_FR1_B	RSRP_27
		NR_TDD_FR1_C	RSRP_27
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_28
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_28
		NR_FDD_FR1_F	RSRP_29
		NR_FDD_FR1_G	RSRP_29
		NR_FDD_FR1_H	RSRP_30
Highest reported value (Cell 1)	RSRP_85	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_49
		NR_FDD_FR1_B	RSRP_49
		NR_TDD_FR1_C	RSRP_50
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_50
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_51
		NR_FDD_FR1_F	RSRP_51
		NR_FDD_FR1_G	RSRP_52
		NR_FDD_FR1_H	RSRP_52
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 16.7.4.2.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 3

Normal Conditions	**Test 1 All bands**	**Band group**	**Test 2**
Lowest reported value (Cell 1)	RSRP_65	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_34
		NR_FDD_FR1_B	RSRP_34
		NR_TDD_FR1_C	RSRP_35
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_35
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_36
		NR_FDD_FR1_F	RSRP_36
		NR_FDD_FR1_G	RSRP_37
		NR_FDD_FR1_H	RSRP_37
Highest reported value (Cell 1)	RSRP_85	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_47
		NR_FDD_FR1_B	RSRP_48
		NR_TDD_FR1_C	RSRP_48
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_49
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_49
		NR_FDD_FR1_F	RSRP_50
		NR_FDD_FR1_G	RSRP_50
		NR_FDD_FR1_H	RSRP_51
Extreme Conditions	**Test 1 All bands**	**Band group**	**Test 2**
Lowest reported value (Cell 1)	RSRP_62	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_29
		NR_FDD_FR1_B	RSRP_30
		NR_TDD_FR1_C	RSRP_30

		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_31
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_31
		NR_FDD_FR1_F	RSRP_32
		NR_FDD_FR1_G	RSRP_32
		NR_FDD_FR1_H	RSRP_33
Highest reported value (Cell 1)	RSRP_88	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_52
		NR_FDD_FR1_B	RSRP_52
		NR_TDD_FR1_C	RSRP_53
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_53
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_54
		NR_FDD_FR1_F	RSRP_54
		NR_FDD_FR1_G	RSRP_55
		NR_FDD_FR1_H	RSRP_55
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

16.7.4.2.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy for 2 Rx UE

16.7.4.2.2.1 Test purpose

To verify that the SSB based L1-RSRP relative measurement accuracy is within the specified limits for all bands.

16.7.4.2.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.7.4.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.4.2.

16.7.4.2.2.4 Test description

16.7.4.2.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.4.1.2.4.1 with following exceptions:

- Table 6.7.4.1.2.4.1-1 is replaced by Table 16.7.4.2.2.4.1-1;
- Table 6.7.4.1.2.4.1-2 is replaced by Table 16.7.4.2.2.4.1-2;

Table 16.7.4.2.2.4.1-1: Supported test configurations

Test Config	Description
16.7.4.2.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.4.2.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.4.2.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.4.2.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.4.2.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 16.7.4.2.2.4.1-1.	

Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

16.7.4.2.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.1.2.4.2.

16.7.4.2.2.4.3 Message contents

Same as the message contents given in clause 6.7.4.1.2.4.3.

16.7.4.2.2.5 Test requirement

Same as the thest requirements given in clause 6.7.4.1.2.5 with following exceptions:

- Table 6.7.4.1.2.5-1 is replaced by Table 16.7.4.2.1.5-1;
- Table 6.7.4.1.2.5-2 is replaced by Table 16.7.4.2.2.5-2;

Table 16.7.4.2.2.5-1: Void

Table 16.7.4.2.2.5-2: L1-RSRP relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2
Extreme Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2

16.7.4.3 CSI-RS based L1-RSRP measurements for 1 Rx UE

16.7.4.3.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for 1 Rx UE

16.7.4.3.1.1 Test purpose

To verify that the CSI-RS based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

16.7.4.3.1.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.7.4.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.4.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.4.3.

16.7.4.3.1.4 Test description

16.7.4.3.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.4.2.1.4.1 with following exceptions:

- Table 6.7.4.2.1.4.1-1 is replaced by Table 16.7.4.3.1.4.1-1;
- Table 6.7.4.2.1.4.1-2 is replaced by Table 16.7.4.3.1.4.1-2;

Table 16.7.4.3.1.4.1-1: Supported test configurations

Test Config	Description
16.7.4.3.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.4.3.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.4.3.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.4.3.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.4.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.4.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

16.7.4.3.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.2.1.4.2.

16.7.4.3.1.4.3 Message contents

Same as the message contents given in clause 6.7.4.2.1.4.3.

16.7.4.3.1.5 Test requirement

Same as the thest requirements given in clause 6.7.4.2.1.5 with following exceptions:

- Table 6.7.4.2.1.5-1 is replaced by Table 16.7.4.3.1.5-1;
- Table 6.7.4.2.1.5-2 is replaced by Table 16.7.4.3.1.5-2;

Table 16.7.4.3.1.5-1: Cell specific test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~4		freq1	
Duplex mode	1		FDD	
	2,3		TDD	
	4		HD-FDD	
TDD Configuration	1,4		N/A	
	2		TDDConf.1.1	
	3		TDDConf.2.1	
$BW_{channel}$	1,2,4	MHz	10: $N_{RB,c}$ = 52	

	3		20: $N_{RB,c}$ = 51	
PDSCH RMC	1,4		SR.1.1 FDD	
	2		SR.1.1 TDD	
	3		SR.2.1 TDD	
RMSI CORESET RMC	1,4		CR.1.1 FDD	
	2		CR.1.1 TDD	
	3		CR.2.1 TDD	
Dedicated CORESET RMC	1,4		CCR.1.1 FDD	
	2		CCR.1.1 TDD	
	3		CCR.2.1 TDD	
SSB configuration	1,2,4		SSB.3 FR1	
	3		SSB.2 RedCap FR1	
OCNG Patterns	1~4		OP.1	
TRS configuration	1,4		TRS.1.1 FDD	
	2		TRS.1.1 TDD	
	3		TRS.1.2 TDD	
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	1~4		SMTC.1	
CSI-RS configuration	1,4		CSI-RS 1.2 FDD	
	2		CSI-RS 1.2 TDD	
	3		CSI-RS 2.2 TDD	
reportConfigType	1~4		periodic	
reportQuantity	1~4		cri-RSRP	
Number of reported RS	1~4		2	
L1-RSRP reporting period	1~4		slot80	
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1	1~4	dB	0	
N_{oc} Note2	1~4	dBm/ 15kHz	-94.65	-117+ Δ_{BG_offset}
N_{oc} Note2	1,2,4	dBm/ SCS	-94.65	-117+ Δ_{BG_offset}
	3		-91.65	-114+ Δ_{BG_offset}
$\hat{E}_s / I_{ot}$	1~4	dB	10	-2.65
CSI-RSRP Note3	1,2,4	dBm/ SCS	-84.65	-119.65 + Δ_{BG_offset}
	3		-81.65	-116.65 + Δ_{BG_offset}
Io Note3	1,2,4	dBm/ 9.36 MHz	-56.28	-87.16 + Δ_{BG_offset}
	3	dBm/ 18.36 MHz	-53.36	-84.24 + Δ_{BG_offset}
$\hat{E}_s / N_{oc}$	1~4	dB	10	-2.65
Propagation condition	1~4		AWGN	

Antenna configuration	1~4		1x1

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 16.7.4.3.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2 and 4

Normal Conditions	Test 1 All bands	Band group	Test 2
Lowest reported value (Cell 1)	RSRP_59	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_27
		NR_FDD_FR1_B	RSRP_28
		NR_TDD_FR1_C	RSRP_28
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_29
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_29
		NR_FDD_FR1_F	RSRP_30
		NR_FDD_FR1_G	RSRP_30
		NR_FDD_FR1_H	RSRP_31
Highest reported value (Cell 1)	RSRP_85	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_46
		NR_FDD_FR1_B	RSRP_47
		NR_TDD_FR1_C	RSRP_47
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_48
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_48
		NR_FDD_FR1_F	RSRP_49
		NR_FDD_FR1_G	RSRP_49
		NR_FDD_FR1_H	RSRP_50
Extreme Conditions	**Test 1 All bands**	**Band group**	**Test 2**
Lowest reported value (Cell 1)	RSRP_56	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_23
		NR_FDD_FR1_B	RSRP_23
		NR_TDD_FR1_C	RSRP_24
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_24
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_25
		NR_FDD_FR1_F	RSRP_25
		NR_FDD_FR1_G	RSRP_26
		NR_FDD_FR1_H	RSRP_26
Highest reported value (Cell 1)	RSRP_88	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_51
		NR_FDD_FR1_B	RSRP_51
		NR_TDD_FR1_C	RSRP_52
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_52
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_53
		NR_FDD_FR1_F	RSRP_53
		NR_FDD_FR1_G	RSRP_54

		NR_FDD_FR1_H	RSRP_54
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 16.7.4.3.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 3

Normal Conditions	Test 1 All bands	Band group	Test 2
Lowest reported value (Cell 1)	RSRP_62	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_30
		NR_FDD_FR1_B	RSRP_31
		NR_TDD_FR1_C	RSRP_31
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_32
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_32
		NR_FDD_FR1_F	RSRP_33
		NR_FDD_FR1_G	RSRP_33
		NR_FDD_FR1_H	RSRP_34
Highest reported value (Cell 1)	RSRP_88	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_49
		NR_FDD_FR1_B	RSRP_50
		NR_TDD_FR1_C	RSRP_50
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_51
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_51
		NR_FDD_FR1_F	RSRP_52
		NR_FDD_FR1_G	RSRP_52
		NR_FDD_FR1_H	RSRP_53
Extreme Conditions	**Test 1 All bands**	**Band group**	**Test 2**
Lowest reported value (Cell 1)	RSRP_59	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_26
		NR_FDD_FR1_B	RSRP_26
		NR_TDD_FR1_C	RSRP_27
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_27
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_28
		NR_FDD_FR1_F	RSRP_28
		NR_FDD_FR1_G	RSRP_29
		NR_FDD_FR1_H	RSRP_29
Highest reported value (Cell 1)	RSRP_91	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_54
		NR_FDD_FR1_B	RSRP_54
		NR_TDD_FR1_C	RSRP_55
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_55
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_56
		NR_FDD_FR1_F	RSRP_56
		NR_FDD_FR1_G	RSRP_57
		NR_FDD_FR1_H	RSRP_57
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

16.7.4.3.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for 1 Rx UE

16.7.4.3.2.1 Test purpose

To verify that the CSI-RS based L1-RSRP relative measurement accuracy is within the specified limits for all bands.

16.7.4.3.2.2 Test applicability

This test applies to all types of NR RedCap UE with 1 Rx from Release 17 onwards.

16.7.4.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.4.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.4.3.

16.7.4.3.2.4 Test description

16.7.4.3.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.4.2.2.4.1 with following exceptions:

- Table 6.7.4.2.2.4.1-1 is replaced by Table 16.7.4.3.2.4.1-1;
- Table 6.7.4.2.2.4.1-2 is replaced by Table 16.7.4.3.2.4.1-2;

Table 16.7.4.3.2.4.1-1: Supported test configurations

Test Config	Description
16.7.4.3.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.4.3.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.4.3.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.4.3.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.4.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.4.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

16.7.4.3.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.2.2.4.2.

16.7.4.3.2.4.3 Message contents

Same as the message contents given in clause 6.7.4.2.2.4.3.

16.7.4.3.2.5 Test requirement

Same as the thest requirements given in clause 6.7.4.2.2.5 with following exceptions:

- Table 6.7.4.2.2.5-1 is replaced by Table 16.7.4.3.1.5-1;
- Table 6.7.4.2.2.5-2 is replaced by Table 16.7.4.3.2.5-2;

Table 16.7.4.3.2.5-1: Void

Table 16.7.4.3.2.5-2: L1-RSRP relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	3	3
Extreme Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	3	3

16.7.4.4 CSI-RS based L1-RSRP measurements for 2 Rx UE

16.7.4.4.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for 2 Rx UE

16.7.4.4.1.1 Test purpose

To verify that the CSI-RS based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

16.7.4.4.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.7.4.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.4.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.4.4.

16.7.4.4.1.4 Test description

16.7.4.4.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.4.2.1.4.1 with following exceptions:

- Table 6.7.4.2.1.4.1-1 is replaced by Table 16.7.4.4.1.4.1-1;
- Table 6.7.4.2.1.4.1-2 is replaced by Table 16.7.4.4.1.4.1-2;

Table 16.7.4.4.1.4.1-1: Supported test configurations

Test Config	Description
16.7.4.4.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.4.4.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.4.4.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.4.4.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.4.4.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.	

Channel bandwidth	As specified by the test configuration selected from Table 16.7.4.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

16.7.4.4.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.2.1.4.2.

16.7.4.4.1.4.3 Message contents

Same as the message contents given in clause 6.7.4.2.1.4.3.

16.7.4.4.1.5 Test requirement

Same as the thest requirements given in clause 6.7.4.2.1.5 with following exceptions:

- Table 6.7.4.2.1.5-1 is replaced by Table 16.7.4.4.1.5-1;
- Table 6.7.4.2.1.5-2 is replaced by Table 16.7.4.4.1.5-2;

Table 16.7.4.4.1.5-1: Cell specific test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~4		freq1	
Duplex mode	1		FDD	
	2,3		TDD	
	4		HD-FDD	
TDD Configuration	1,4		N/A	
	2		TDDConf.1.1	
	3		TDDConf.2.1	
$BW_{channel}$	1,2,4	MHz	10: $N_{RB,c}$ = 52	
	3		20: $N_{RB,c}$ = 51	
PDSCH RMC	1,4		SR.1.1 FDD	
	2		SR.1.1 TDD	
	3		SR.2.1 TDD	
RMSI CORESET RMC	1,4		CR.1.1 FDD	
	2		CR.1.1 TDD	
	3		CR.2.1 TDD	
Dedicated CORESET RMC	1,4		CCR.1.1 FDD	
	2		CCR.1.1 TDD	
	3		CCR.2.1 TDD	
SSB configuration	1,2,4		SSB.3 FR1	
	3		SSB.2 RedCap FR1	
OCNG Patterns	1~4		OP.1	
TRS configuration	1,4		TRS.1.1 FDD	
	2		TRS.1.1 TDD	
	3		TRS.1.2 TDD	
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	1~4		SMTC.1	
CSI-RS configuration	1,4		CSI-RS 1.2 FDD	
	2		CSI-RS 1.2 TDD	

	3		CSI-RS 2.2 TDD	
reportConfigType	1~4		periodic	
reportQuantity	1~4		cri-RSRP	
Number of reported RS	1~4		2	
L1-RSRP reporting period	1~4		slot80	
EPRE ratio of PSS to SSS EPRE ratio of PBCH DMRS to SSS EPRE ratio of PBCH to PBCH DMRS EPRE ratio of PDCCH DMRS to SSS EPRE ratio of PDCCH to PDCCH DMRS EPRE ratio of PDSCH DMRS to SSS EPRE ratio of PDSCH to PDSCH DMRS EPRE ratio of OCNG DMRS to SSS Note 1 EPRE ratio of OCNG to OCNG DMRS Note 1	1~4	dB	0	
N_{oc} Note2	1,2,4	dBm/ 15kHz	-94.65	-117+ Δ_{BG_offset}
	3		-94.65	
N_{oc} Note2	1,2,4	dBm/ SCS	-94.65	-117+ Δ_{BG_offset}
	3		-91.65	-114+ Δ_{BG_offset}
$\hat{E}_s / I_{ot}$	1~4	dB	10	-2.2
CSI-RSRP Note3	1,2,4	dBm/ SCS	-84.65	-119.2+ Δ_{BG_offset}
	3		-81.65	-116.2 + Δ_{BG_offset}
Io Note3	1,2,4	dBm/ 9.36 MHz	-56.28	-87.00 + Δ_{BG_offset}
	3	dBm/ 18.36 MHz	-53.36	-84.07 + Δ_{BG_offset}
$\hat{E}_s / N_{oc}$	1~4	dB	10	-2.2
Propagation condition	1~4		AWGN	
Antenna configuration and Correlation matrix	1~4		1x2 Low	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Table 16.7.4.4.1.5-2: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1, 2 and 4

Normal Conditions	Test 1 All bands	Band group	Test 2

Lowest reported value (Cell 1)	RSRP_62	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_31
		NR_FDD_FR1_B	RSRP_31
		NR_TDD_FR1_C	RSRP_32
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_32
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_33
		NR_FDD_FR1_F	RSRP_33
		NR_FDD_FR1_G	RSRP_34
		NR_FDD_FR1_H	RSRP_34
Highest reported value (Cell 1)	RSRP_82	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_44
		NR_FDD_FR1_B	RSRP_45
		NR_TDD_FR1_C	RSRP_45
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_46
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_46
		NR_FDD_FR1_F	RSRP_47
		NR_FDD_FR1_G	RSRP_47
		NR_FDD_FR1_H	RSRP_48
Extreme Conditions	**Test 1 All bands**	**Band group**	**Test 2**
Lowest reported value (Cell 1)	RSRP_59	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_26
		NR_FDD_FR1_B	RSRP_27
		NR_TDD_FR1_C	RSRP_27
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_28
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_28
		NR_FDD_FR1_F	RSRP_29
		NR_FDD_FR1_G	RSRP_29
		NR_FDD_FR1_H	RSRP_30
Highest reported value (Cell 1)	RSRP_85	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_49
		NR_FDD_FR1_B	RSRP_49
		NR_TDD_FR1_C	RSRP_50
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_50
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_51
		NR_FDD_FR1_F	RSRP_51
		NR_FDD_FR1_G	RSRP_52
		NR_FDD_FR1_H	RSRP_52
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2.			

Table 16.7.4.4.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configuration 3

Normal Conditions	**Test 1 All bands**	**Band group**	**Test 2**
Lowest reported value (Cell 1)	RSRP_65	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_34
		NR_FDD_FR1_B	RSRP_34
		NR_TDD_FR1_C	RSRP_35
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_35
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_36
		NR_FDD_FR1_F	RSRP_36
		NR_FDD_FR1_G	RSRP_37
		NR_FDD_FR1_H	RSRP_37

Highest reported value (Cell 1)	RSRP_85	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_47
		NR_FDD_FR1_B	RSRP_48
		NR_TDD_FR1_C	RSRP_48
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_49
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_49
		NR_FDD_FR1_F	RSRP_50
		NR_FDD_FR1_G	RSRP_50
		NR_FDD_FR1_H	RSRP_51
Extreme Conditions	**Test 1 All bands**	**Band group**	**Test 2**
Lowest reported value (Cell 1)	RSRP_62	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_29
		NR_FDD_FR1_B	RSRP_30
		NR_TDD_FR1_C	RSRP_30
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_31
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_31
		NR_FDD_FR1_F	RSRP_32
		NR_FDD_FR1_G	RSRP_32
		NR_FDD_FR1_H	RSRP_33
Highest reported value (Cell 1)	RSRP_88	NR_FDD_FR1_A, NR_TDD_FR1_A	RSRP_52
		NR_FDD_FR1_B	RSRP_52
		NR_TDD_FR1_C	RSRP_53
		NR_FDD_FR1_D, NR_TDD_FR1_D	RSRP_53
		NR_FDD_FR1_E, NR_TDD_FR1_E	RSRP_54
		NR_FDD_FR1_F	RSRP_54
		NR_FDD_FR1_G	RSRP_55
		NR_FDD_FR1_H	RSRP_55
Note 1: NR operating band groups are defined in clause 3A.4, Table 3A.4.1-2			

16.7.4.4.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for 2 Rx UE

16.7.4.4.2.1 Test purpose

To verify that the CSI-RS based L1-RSRP relative measurement accuracy is within the specified limits for all bands.

16.7.4.4.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards.

16.7.4.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.4.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.4.4.

16.7.4.4.2.4 Test description

16.7.4.4.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.4.2.2.4.1 with following exceptions:

- Table 6.7.4.2.2.4.1-1 is replaced by Table 16.7.4.4.2.4.1-1;
- Table 6.7.4.2.2.4.1-2 is replaced by Table 16.7.4.4.2.4.1-2;

Table 16.7.4.4.2.4.1-1: Supported test configurations

Test Config	Description
16.7.4.4.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
16.7.4.4.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
16.7.4.4.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
16.7.4.4.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.4.4.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.4.4.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.5.2	
Exceptions to connection diagram	N/A		

16.7.4.4.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.2.2.4.2.

16.7.4.4.2.4.3 Message contents

Same as the message contents given in clause 6.7.4.2.2.4.3.

16.7.4.4.2.5 Test requirement

Same as the thest requirements given in clause 6.7.4.2.2.5 with following exceptions:

- Table 6.7.4.2.2.5-1 is replaced by Table 16.7.4.4.1.5-1;
- Table 6.7.4.2.2.5-2 is replaced by Table 16.7.4.4.2.5-2;

Table 16.7.4.4.2.5-1: Void

Table 16.7.4.4.2.5-2: L1-RSRP relative accuracy requirements for the reported values

	Test 1	Test 2
	All bands	All bands
Normal Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2
Extreme Conditions		
Lowest DIFF RSRP reported value	0	0
Highest DIFF RSRP reported value	2	2

16.7.5 E-UTRAN RSRP for RedCap

16.7.5.0 Minimum conformance requirements

16.7.5.0.1 E-UTRAN RSRP absolute accuracy

When RedCap UE is capable of 2Rx, the minimum requirements given in clause 6.7.5.0.1 shall apply.

When RedCap UE is only required to support 1Rx, the requirements for absolute accuracy of RSRP in this clause apply to a cell that has different carrier frequency from the serving cell.

The accuracy requirements in Table 16.7.5.0.1-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in TS 36.101 [27] Clause 7.3 for reference sensitivity are fulfilled.

RSRP|dBm according to TS 36.133 [23] Annex B.3.3 for a corresponding Band.

Table 16.7.5.0.1-1: E-UTRAN RSRP absolute accuracy for 1Rx RedCap UE

Accuracy		Conditions			
			Io Note 1 range		
Normal condition	Extreme condition	Ês/Iot	E-UTRA operating band groups Note 3	Minimum Io		Maximum Io
dB	dB	dB		dBm/15kHz Note 2	$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
±5.5	±10	≥-6	FDD_A, TDD_A	-121	N/A	-70
			FDD_B1	-120.5	N/A	-70
			FDD_C, TDD_C	-120	N/A	-70
			FDD_D	-119.5	N/A	-70
			FDD_E, TDD_E	-119	N/A	-70
			FDD_F	-118.5	N/A	-70
			FDD_G	-118	N/A	-70
			FDD_H	-117.5	N/A	-70
			FDD_N	-114.5	N/A	-70
±9	±12	≥-6	FDD_A, TDD_A, FDD_B1, FDD_C, TDD_C, FDD_D, FDD_E, TDD_E, FDD_F, FDD_G, FDD_H, FDD_N	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The condition level is increased by Δ>0, when applicable, as described in TS 36.133 [23] Sections B.4.2 and B.4.3.
NOTE 3: E-UTRA operating band groups are as defined in TS 36.133 [23] Section 3.5.

The reporting range and mapping specified for RSRP measurements in clause 9.1.4 of TS 36.133 [23] shall apply.

The normative reference for this requirement is TS 38.133 [6] clause 10.2A.2 and TS 36.133 clause 9.1.3.3.

16.7.5.1 NR SA FR1 - E-UTRA RSRP absolute measurement accuracy for 1 Rx UE

16.7.5.1.1 Test purpose

To verify that the E-UTRAN RSRP measurement accuracy is within the specified limits. This test will verify the requirements in TS 38.133 [6] clause 10.2A.2 for SA inter-RAT E-UTRAN RSRP measurements.

16.7.5.1.2 Test applicability

This test applies to all types of NR RedCap UEs with 1Rx from Release 17 onwards and supporting E-UTRA.

16.7.5.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.5.1.

16.7.5.1.4 Test description

16.7.5.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.5.1.4.1 with following exceptions:

- Table 6.7.5.1.4.1-1 is replaced by Table 16.7.5.1.4.1-1;
- Table 6.7.5.1.4.1-2 is replaced by Table 16.7.5.1.4.1-2;

Table 16.7.5.1.4.1-1: Supported test configurations

Configuration	Description
16.7.5.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
16.7.5.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
16.7.5.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
16.7.5.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
16.7.5.1-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
16.7.5.1-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
16.7.5.1-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN FDD
16.7.5.1-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.5.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.5.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

16.7.5.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.5.1.4.2.

16.7.5.1.4.3 Message contents

Same as the message contents given in 6.7.5.1.4.3.

16.7.5.1.5 Test requirement

Same as the test requirements given in clause 6.7.5.1.5 with following exceptions:

- Table 6.7.5.1.5-1 is replaced by Table 16.7.5.1.5-1;
- Table 6.7.5.1.5-2 is replaced by Table 16.7.5.1.5-2;
- Table 6.7.5.1.5-3 is replaced by Table 16.7.5.1.5-3;

Table 16.7.5.1.5-1: NR Cell specific test parameters (Cell 1)

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
	Config 7,8		HD-FDD
TDD Configuration	Config 1,4,7,8		N/A
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52
	Config 3,6		20: $N_{RB,c}$ = 51
Gap pattern Id			0
PDSCH RMC	Config 1,4,7,8		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORSET RMC	Config 1,4,7,8		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORSET RMC	Config 1, 4,7,8		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1,4,7,8		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
Initial DL BWP			DLBWP.0.1
Dedicated DL BWP			DLBWP.1.1
Initial UL BWP			ULBWP.0.1
Dedicated UL BWP			ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1,2,4,5,7,8		SSB.1 FR1
	Config 3,6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1,2,4,5,7,8	dBm/SCS	-104
	Config 3,6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$[Note3]		dB	17
SS-RSRP[Note3]	Config 1,2,4,5,7,8	dBm/SCS	-87
	Config 3,6		-84
SSB_RP[Note3]	Config 1,2,4,5,7,8	dBm/SCS	-87
	Config 3,6		-84
Io[Note3]	Config 1,2,4,5,7,8	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration			1x1

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.7.5.1.5-2: E-UTRAN Cell specific test parameters (Cell 2)

Parameter		Unit	Cell 2	
			Test 1	Test 2
E-UTRA RF channel number			2	
Duplex mode	Config 1,2,3,7		FDD	
	Config 4,5,6,8		TDD	
TDD special subframe configuration[Note1]	Config 1,2,3,7		N/A	
	Config 4,5,6,8		6	
TDD uplink-downlink configuration[Note1]	Config 1,2,3,7		N/A	
	Config 4,5,6,8		1	
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]			-	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1,2,3,7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
	Config 4,5,6,8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]	Config 1,2,3,7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD	
	Config 4,5,6,8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]		dBm/15kHz	-91.65	$-117 + \Delta_{BG_offset}$
$\hat{E}_s/N_{oc}$		dB	10	-3.65
$\hat{E}_s/I_{ot}$[Note5]		dB	10	-3.65
RSRP[Note5]		dBm/15kHz	-81.65	$-120.65 + \Delta_{BG_offset}$
SCH_RP[Note5]		dBm/15kHz	-81.65	$-120.65 + \Delta_{BG_offset}$
Io[Note5]		dBm/Ch BW	$-53.45 + 10\log(N_{RB,c}/50)$	$-87.66 + 10\log(N_{RB,c}/50) + \Delta_{BG_offset}$
Propagation Condition			AWGN	
Antenna Configuration			1x1	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [23].
Note 7: For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8: Except Band 29.
Note 9: Except Band 32, Band 75 and Band 76.
Note 10: For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

Table 16.7.5.1.5-3: E-UTRA RSRP absolute accuracy requirements for the reported values

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	48	FDD_A, TDD_A	13
		FDD_B	13
		TDD_C	14
		FDD_D, TDD_D	14
		FDD_E, TDD_E	15
		FDD_G	16
		FDD_H	16
Highest reported value (Cell 2)	69	FDD_A, TDD_A	27
		FDD_B	27
		TDD_C	28
		FDD_D, TDD_D	28
		FDD_E, TDD_E	29
		FDD_G	30
		FDD_H	30
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	45	FDD_A, TDD_A	8
		FDD_B	9
		TDD_C	9
		FDD_D, TDD_D	10
		FDD_E, TDD_E	10
		FDD_G	11
		FDD_H	12
Highest reported value (Cell 2)	72	FDD_A, TDD_A	31
		FDD_B	32
		TDD_C	32
		FDD_D, TDD_D	33
		FDD_E, TDD_E	33
		FDD_G	34
		FDD_H	35
Note 1: E-UTRA operating band groups are as defined in TS 36.521-3 [26] clause 3.5.1			

16.7.5.2 NR SA FR1 - E-UTRA RSRP absolute measurement accuracy for 2 Rx UE

16.7.5.2.1 Test purpose

To verify that the E-UTRAN RSRP measurement accuracy is within the specified limits. This test will verify the requirements in TS 38.133 [6] clause 10.2A.2 for SA inter-RAT E-UTRAN RSRP measurements.

16.7.5.2.2 Test applicability

This test applies to all types of NR RedCap UEs with 2Rx from Release 17 onwards and supporting E-UTRA.

16.7.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.5.2.

16.7.5.2.4 Test description

16.7.5.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.5.1.4.1 with following exceptions:

- Table 6.7.5.1.4.1-1 is replaced by Table 16.7.5.2.4.1-1;

- Table 6.7.5.1.4.1-2 is replaced by Table 16.7.5.2.4.1-2;

Table 16.7.5.2.4.1-1: Supported test configurations

Configuration	Description
16.7.5.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
16.7.5.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
16.7.5.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
16.7.5.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
16.7.5.2-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
16.7.5.2-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
16.7.5.2-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN FDD
16.7.5.2-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.5.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.5.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

16.7.5.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.5.1.4.2.

16.7.5.2.4.3 Message contents

Same as the message contents given in 6.7.5.1.4.3.

16.7.5.2.5 Test requirement

Same as the test requirements given in clause 6.7.5.1.5 with following exceptions:

- Table 6.7.5.1.5-1 is replaced by Table 16.7.5.2.5-1;
- Table 6.7.5.1.5-2 is replaced by Table 16.7.5.2.5-2;
- Table 6.7.5.1.5-3 is replaced by Table 16.7.5.2.5-3;

Table 16.7.5.2.5-1: NR Cell specific test parameters (Cell 1)

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
	Config 7,8		HD-FDD
TDD Configuration	Config 1,4,7,8		N/A
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52
	Config 3,6		20: $N_{RB,c}$ = 51
Gap pattern Id			0
PDSCH RMC	Config 1,4,7,8		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD

RMSI CORSET RMC	Config 1,4,7,8		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORSET RMC	Config 1,4,7,8		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
CSI-RS for tracking	Config 1,4,7,8		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
Initial DL BWP			DLBWP.0.1
Dedicated DL BWP			DLBWP.1.1
Initial UL BWP			ULBWP.0.1
Dedicated UL BWP			ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1,2,4,5,7,8		SSB.1 FR1
	Config 3,6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1,2,4,5,7,8	dBm/SCS	-104
	Config 3,6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$[Note3]		dB	17
SS-RSRP[Note3]	Config 1,2,4,5,7,8	dBm/SCS	-87
	Config 3,6		-84
SSB_RP[Note3]	Config 1,2,4,5,7,8	dBm/SCS	-87
	Config 3,6		-84
Io[Note3]	Config 1,2,4,5,7,8	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2 Low

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.7.5.2.5-2: E-UTRAN Cell specific test parameters (Cell 2)

Parameter		Unit	Cell 2	
			Test 1	Test 2
E-UTRA RF channel number			2	
Duplex mode	Config 1,2,3,7		FDD	
	Config 4,5,6,8		TDD	
TDD special subframe configuration[Note1]	Config 1,2,3,7		N/A	
	Config 4,5,6,8		6	
TDD uplink-downlink configuration[Note1]	Config 1,2,3,7		N/A	
	Config 4,5,6,8		1	
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]			-	
	Config 1,2,3,7		5 MHz: R.11 FDD 10 MHz: R.6 FDD	

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]			20 MHz: R.10 FDD	
	Config 4,5,6,8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]	Config 1,2,3,7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD	
	Config 4,5,6,8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]		dBm/15kHz	-91.65	-117 + Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		dB	10	-3.2
$\hat{E}_s/I_{ot}$[Note5]		dB	10	-3.2
RSRP[Note5]		dBm/15kHz	-81.65	-120.2 + Δ_{BG_offset}
SCH_RP[Note5]		dBm/15kHz	-81.65	-120.2 + Δ_{BG_offset}
Io[Note5]		dBm/Ch BW	-53.45 + 10log($N_{RB,c}$/50)	-87.52 + 10log($N_{RB,c}$/50) + Δ_{BG_offset}
Propagation Condition			AWGN	
Antenna Configuration and Correlation Matrix			1x2 Low	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [23].
Note 7: For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8: Except Band 29.
Note 9: Except Band 32, Band 75 and Band 76.
Note 10: For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

Table 16.7.5.2.5-3: E-UTRA RSRP absolute accuracy requirements for the reported values

Normal Conditions	Test 1 All bands	Test 2	
Lowest reported value (Cell 2)	49	FDD_A, TDD_A	14
		FDD_B	15
		TDD_C	15
		FDD_D, TDD_D	16
		FDD_E, TDD_E	16
		FDD_G	17
		FDD_H	18
Highest reported value (Cell 2)	69	FDD_A, TDD_A	27
		FDD_B	27
		TDD_C	28
		FDD_D, TDD_D	28
		FDD_E, TDD_E	29

		FDD_G	30
		FDD_H	30
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 2)	46	FDD_A, TDD_A	10
		FDD_B	10
		TDD_C	11
		FDD_D, TDD_D	11
		FDD_E, TDD_E	12
		FDD_G	13
		FDD_H	13
Highest reported value (Cell 2)	72	FDD_A, TDD_A	31
		FDD_B	32
		TDD_C	32
		FDD_D, TDD_D	33
		FDD_E, TDD_E	33
		FDD_G	34
		FDD_H	35
Note 1: E-UTRA operating band groups are as defined in TS 36.521-3 [26] clause 3.5.1			

16.7.6 E-UTRAN RSRQ for RedCap

16.7.6.0 Minimum conformance requirements

16.7.6.0.1 E-UTRAN RSRQ absolute accuracy

When RedCap UE is capable of 2Rx, the minimum requirements given in clause 6.7.6.0.1 shall apply.

When RedCap UE is only required to support 1Rx, the requirements for absolute accuracy of RSRQ in this clause apply to a cell that has different carrier frequency from the serving cell.

The accuracy requirements in Table 16.7.6.0.1-1 are valid under the following conditions:

Cell specific reference signals are transmitted either from one, two or four antenna ports.

Conditions defined in TS 36.101 [27] Clause 7.3 for reference sensitivity are fulfilled.

RSRP|dBm according to TS 36.133 [23] Annex B.3.1 for a corresponding Band.

Table 16.7.6.0.1-1: E-UTRAN RSRQ absolute accuracy for 1Rx RedCap UE

Accuracy		**Conditions**			
Normal condition	**Extreme condition**	**Ês/Iot**	**Io [Note 1] range**		
			E-UTRA operating band groups [Note 4]	**Minimum Io**	**Maximum Io**
dB	**dB**	**dB**		**dBm/15kHz [Note 3]**	**dBm/BW$_{Channel}$**
±3.5	±5	≥-3 dB	FDD_A, TDD_A	-121	-50
			FDD_B1	-120.5	-50
			FDD_C, TDD_C	-120	-50
			FDD_D	-119.5	-50
			FDD_E, TDD_E	-119	-50
			FDD_F	-118.5	-50
			FDD_G	-118	-50
			FDD_H	-117.5	-50
			FDD_N	-114.5	-50
±4.5	±5	≥-6 dB	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: The condition level is increased by Δ>0, when applicable, as described in TS 36.133 [23] Sections B.4.2 and B.4.3. NOTE 4: E-UTRA operating band groups are as defined in TS 36.133 [23] Section 3.5.					

The reporting range and mapping specified for RSRP measurements in clause 9.1.4 of TS 36.133 [23] shall apply.

The normative reference for this requirement is TS 38.133 [6] clauses 10.2A.3 and TS 36.133 [23] clause 9.1.5.5.

16.7.6.1 NR SA FR1 - E-UTRA RSRQ absolute measurement accuracy for 1 Rx UE

16.7.6.1.1 Test purpose

To verify that the E-UTRAN RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in TS 38.133 [6] clause 10.2A.2 for SA inter-RAT E-UTRAN RSRP measurements.

16.7.6.1.2 Test applicability

This test applies to all types of NR RedCap UEs with 1Rx from Release 17 onwards and supporting E-UTRA.

16.7.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.6.1.

16.7.6.1.4 Test description

16.7.6.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.6.1.4.1 with following exceptions:

- Table 6.7.6.1.4.1-1 is replaced by Table 16.7.6.1.4.1-1;
- Table 6.7.6.1.4.1-2 is replaced by Table 16.7.6.1.4.1-2;

Table 16.7.6.1.4.1-1: Supported test configurations

Configuration	Description
16.7.6.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
16.7.6.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
16.7.6.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
16.7.6.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
16.7.6.1-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
16.7.6.1-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
16.7.6.1-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN FDD
16.7.6.1-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.6.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.6.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.2.1	
Exceptions to connection diagram	N/A		

16.7.6.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.6.1.4.2.

16.7.6.1.4.3 Message contents

Same as the message contents given in 6.7.6.1.4.3.

16.7.6.1.5 Test requirement

Same as the test requirements given in clause 6.7.6.1.5 with following exceptions:

- Table 6.7.6.1.5-1 is replaced by Table 16.7.6.1.5-1;
- Table 6.7.6.1.5-2 is replaced by Table 16.7.6.1.5-2;
- Table 6.7.6.1.5-3 is replaced by Table 16.7.6.1.5-3;

Table 16.7.6.1.5-1: NR Cell specific test parameters (Cell 1)

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
	Config 7,8		HD-FDD
TDD Configuration	Config 1,4,7,8		N/A
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52
	Config 3,6		20: $N_{RB,c}$ = 51
Gap pattern Id			0
PDSCH RMC	Config 1,4,7,8		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORSET RMC	Config 1,4,7,8		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORSET RMC	Config 1, 4,7,8		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1,4,7,8		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
Initial DL BWP			DLBWP.0.1
Dedicated DL BWP			DLBWP.1.1
Initial UL BWP			ULBWP.0.1
Dedicated UL BWP			ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1,2,4,5,7,8		SSB.1 FR1
	Config 3,6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1,2,4,5,7,8	dBm/SCS	-104
	Config 3,6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$[Note3]		dB	17
SS-RSRP[Note3]	Config 1,2,4,5,7,8	dBm/SCS	-87
	Config 3,6		-84
SSB_RP[Note3]	Config 1,2,4,5,7,8	dBm/SCS	-87
	Config 3,6		-84

Io^{Note3}	Config 1,2,4,5,7,8	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration			1x1

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.7.6.1.5-2: E-UTRAN Cell specific test parameters (Cell 2)

Parameter		Unit	Cell 2		
			Test 1	Test 2	Test 3
E-UTRA RF channel number			2		
Duplex mode	Config 1,2,3,7		FDD		
	Config 4,5,6,8		TDD		
TDD special subframe configuration[Note1]	Config 1,2,3,7		N/A		
	Config 4,5,6,8		6		
TDD uplink-downlink configuration[Note1]	Config 1,2,3,7		N/A		
	Config 4,5,6,8		1		
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PDSCH parameters: DL Reference Measurement Channel[Note2]			-		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1,2,3,7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
	Config 4,5,6,8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note2]	Config 1,2,3,7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4,5,6,8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		
PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note3]					
OCNG_RB[Note3]					
N_{oc}^{Note4}		dBm/15kHz	-83	-104.70	-119.5 + Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		dB	-1.75	-3.65	-3.65
$\hat{E}_s/I_{ot}^{Note5}$		dB	-1.75	-3.65	-3.65
RSRP[Note5]		dBm/15kHz	-84.75	-108.35	-123.15 + Δ_{BG_offset}
RSRQ[Note5]		dB	-14.76	-16.00	-16.00
Io^{Note5}		dBm/Ch BW	-53 + 10log($N_{RB,c}$/50)	-75.36 + 10log($N_{RB,c}$/50)	-90.16 + 10log($N_{RB,c}$/50) + Δ_{BG_offset}
Propagation Condition			AWGN		
Antenna Configuration			1x1		

Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6:	E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [23].
Note 7:	For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8:	Except Band 29.
Note 9:	Except Band 32, Band 75 and Band 76.
Note 10:	For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

Table 16.7.6.1.5-3: E-UTRA RSRQ absolute accuracy requirements for the reported values

Normal Conditions	Test 1 All bands	Test 2 All bands	Test 3 All bands
Lowest reported value (Cell 2)	3	0	0
Highest reported value (Cell 2)	17	17	17
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest reported value (Cell 2)	0	0	0
Highest reported value (Cell 2)	20	18	18

16.7.6.2 NR SA FR1 - E-UTRA RSRQ absolute measurement accuracy for 2 Rx UE

16.7.6.2.1 Test purpose

To verify that the E-UTRAN RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in TS 38.133 [6] clause 10.2A.2 for SA inter-RAT E-UTRAN RSRP measurements.

16.7.6.2.2 Test applicability

This test applies to all types of NR RedCap UEs with 2Rx from Release 17 onwards and supporting E-UTRA.

16.7.6.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 16.7.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.16.7.6.2.

16.7.6.2.4 Test description

16.7.6.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.6.1.4.1 with following exceptions:

- Table 6.7.6.1.4.1-1 is replaced by Table 16.7.6.2.4.1-1;
- Table 6.7.6.1.4.1-2 is replaced by Table 16.7.6.2.4.1-2;

Table 16.7.6.2.4.1-1: Supported test configurations

Configuration	Description
16.7.6.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
16.7.6.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
16.7.6.2-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
16.7.6.2-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
16.7.6.2-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
16.7.6.2-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
16.7.6.2-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN FDD
16.7.6.2-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 16.7.6.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.14-2 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 16.7.6.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.7.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

16.7.6.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.6.1.4.2.

16.7.6.2.4.3 Message contents

Same as the message contents given in 6.7.6.1.4.3.

16.7.6.2.5 Test requirement

Same as the test requirements given in clause 6.7.6.1.5 with following exceptions:

- Table 6.7.6.1.5-1 is replaced by Table 16.7.6.2.5-1;
- Table 6.7.6.1.5-2 is replaced by Table 16.7.6.2.5-2;
- Table 6.7.6.1.5-3 is replaced by Table 16.7.6.2.5-3;

Table 16.7.6.2.5-1: NR Cell specific test parameters (Cell 1)

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
	Config 7,8		HD-FDD
TDD Configuration	Config 1,4,7,8		N/A
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
$BW_{channel}$	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52
	Config 3,6		20: $N_{RB,c}$ = 51
Gap pattern Id			0
PDSCH RMC	Config 1,4,7,8		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORSET RMC	Config 1,4,7,8		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD

Dedicated CORSET RMC	Config 1, 4,7,8		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1,4,7,8		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
Initial DL BWP			DLBWP.0.1
Dedicated DL BWP			DLBWP.1.1
Initial UL BWP			ULBWP.0.1
Dedicated UL BWP			ULBWP.1.1
OCNG pattern[Note1]			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1,2,4,5,7,8		SSB.1 FR1
	Config 3,6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}[Note2]		dBm/15 kHz	-104
N_{oc}[Note2]	Config 1,2,4,5,7,8	dBm/SCS	-104
	Config 3,6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$[Note3]		dB	17
SS-RSRP[Note3]	Config 1,2,4,5,7,8	dBm/SCS	-87
	Config 3,6		-84
SSB_RP[Note3]	Config 1,2,4,5,7,8	dBm/SCS	-87
	Config 3,6		-84
Io[Note3]	Config 1,2,4,5,7,8	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2 Low

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 16.7.6.2.5-2: E-UTRAN Cell specific test parameters (Cell 2)

Parameter		Unit	Cell 2		
			Test 1	Test 2	Test 3
E-UTRA RF channel number			2		
Duplex mode	Config 1,2,3,7		FDD		
	Config 4,5,6,8		TDD		
TDD special subframe configuration[Note1]	Config 1,2,3,7		N/A		
	Config 4,5,6,8		6		
TDD uplink-downlink configuration[Note1]	Config 1,2,3,7		N/A		
	Config 4,5,6,8		1		
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PDSCH parameters: DL Reference Measurement Channel[Note2]			-		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1,2,3,7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
	Config 4,5,6,8		5 MHz: R.11 TDD		

			10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note2]	Config 1,2,3,7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4,5,6,8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		
PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA[Note3]					
OCNG_RB[Note3]					
N_{oc}[Note4]		dBm/15kHz	-83	-104.70	-119.5 + Δ_{BG_offset}
$\hat{E}_s/N_{oc}$		dB	-1.75	-3.2	-3.2
$\hat{E}_s/I_{ot}$[Note5]		dB	-1.75	-3.2	-3.2
RSRP[Note5]		dBm/15kHz	-84.75	-107.90	-122.7 + Δ_{BG_offset}
RSRQ[Note5]		dB	-14.76	-15.69	-15.69
Io[Note5]		dBm/Ch BW	-53 + 10log($N_{RB,c}$/50)	-75.22 + 10log($N_{RB,c}$/50)	-90.02 + 10log($N_{RB,c}$/50) + Δ_{BG_offset}
Propagation Condition			AWGN		
Antenna Configuration and Correlation Matrix			1x2 Low		

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [23].
Note 7: For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8: Except Band 29.
Note 9: Except Band 32, Band 75 and Band 76.
Note 10: For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

Table 16.7.6.2.5-3: E-UTRA RSRQ absolute accuracy requirements for the reported values

Normal Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest reported value (Cell 2)	4	0	0
Highest reported value (Cell 2)	16	16	16
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest reported value (Cell 2)	1	0	0

Highest reported value (Cell 2)	19	17	17

17 NR standalone tests in FR2 for RedCap

17.1 RRC_IDLE state mobility for RedCap

17.1.1 NR cell re-selection for RedCap

17.1.1.0 Minimum conformance requirements

17.1.1.0.1 Minimum conformance requirements for intra-frequency cell re-selection for RedCap

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS 38.304 [30] within $T_{detect,NR_Intra_RedCap}$ when that Treselection= 0 . An intra frequency cell is considered to be detectable according to the conditions defined in TS 38.133 [6] Annex B.1.4 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra_RedCap}$ for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Intra_RedCap}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS 38.304 [30] within $T_{evaluate,NR_Intra_RedCap}$ when $T_{reselection}$ = 0 provided that:

when *rangeToBestCell* is not configured:

- the cell is at least 4.5dB better ranked in FR2 for 2 Rx RedCap.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS 38.304 [30] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
    - if there are multiple such cells, the cell has the highest rank among them.
        - the cell is at least 4.5dB better ranked in FR2 if the current serving cell is among them for 2 Rx RedCap.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the intra-frequency cell is satisfied with the reselection criteria which are defined in TS 38.304 [30], the UE shall evaluate this intra-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

For 2Rx RedCap not configured with eDRX_IDLE cycle, $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ are specified in Table 17.1.1.0.1-1.

For 2 Rx RedCap configured with eDRX_IDLE cycle, $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ are specified in Table 17.1.1.0.1-2 for FR2, where the requirements apply provided that the serving cell is configured with eDRX_IDLE and is the same in all PTWs during any of $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ when multiple PTWs are used.

Table 17.1.1.0.1-1: $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Intra_RedCap}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x M2 (36 x N1 x M2)	1.28 x N1 x M2 (4 x N1 x M2)	5.12 x N1 x M2 (16 x N1 x M2)
0.64		5	17.92 x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)

Note 1: Applies for RedCap UE of all FR2 power class.
Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{detect, NR_intra_RedCap}$ is expected.

Table 17.1.1.0.1-2: $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 4])	$T_{measure,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 4])	$T_{evaluate,NR_Intra_RedCap}$ [s] (number of DRX cycles or eDRX cycles [Note 4])
2.56	-	-	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
5.12	-	-	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	10.24 x N1 (2 x N1)
10.24	-	-	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	20.48 x N1 (2 x N1)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥5.12 (4)	8	$eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1)	0.32 x N1 (1 x N1)	0.64 x N1 (2 x N1)
	0.64	≥6.4 (5)	5		0.64 x N1 (1 x N1)	1.28 x N1 (2 x N1)
	1.28	≥10.24 (8)	4		1.28 x N1 (1 x N1)	2.56 x N1 (2 x N1)
	2.56	≥15.36 (12)	3		2.56 x N1 (1 x N1)	5.12 x N1 (2 x N1)

NOTE 1: Applies for RedCap UE of all power class.
NOTE 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.
NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap * DRX_cycle}{1.28} \right\rceil * 1.28$.

NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, being configured with eDRX_IDLE cycle, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

17.1.1.0.2 Minimum conformance requirements for inter-frequency cell re-selection for RedCap

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 38.133 [6] in clause 4.2.2.7.

If Srxlev ≤ $S_{nonIntraSearchP}$ or Squal ≤ $S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS 38.304 [30] within $K_{carrier_RedCap} * T_{detect,NR_Inter_RedCap}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection} = 0$ provided that the reselection criteria is met

For 2 Rx RedCap by a margin of at least

5 dB in FR1 or 6.5 dB in FR2 for reselections based on ranking or

7.5 dB in FR2 for SS-RSRP reselections based on absolute priorities or

4 dB in FR2 for SS-RSRQ reselections based on absolute priorities

The parameter $K_{carrier_RedCap}$ is the number of NR inter-frequency carriers indicated by the serving cell. An inter-frequency cell is considered to be detectable according to the conditions defined in TS 38.133 [6] in Annex B.1.5 for a corresponding Band. When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter_RedCap}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier_RedCap} * T_{measure,NR_Inter_RedCap}$ for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [30] within $K_{carrier} * T_{evaluate,NR_Inter_RedCap}$ when $T_{reselection} = 0$ provided that the reselection criteria is met by

- the condition when performing equal priority reselection and

- when *rangeToBestCell* is not configured:
  - the cell is at least 6.5dB better ranked in FR2 for 2 Rx RedCap.
- when *rangeToBestCell* is configured:
  - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value defined in TS38.304 [30] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
    - if there are multiple such cells, the cell has the highest rank among them
    - the cell is at least 6.5dB better ranked in FR2 if the current serving cell is among them, or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities for 2 Rx RedCap or 4dB in FR2 for SS-RSRQ reselections based on absolute priorities for 2 Rx RedCap.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{reselection}$ timer has a non-zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in TS 38.133 [6] in Table 17.1.1.0.2-1 for 2Rx RedCap under the following conditions:

- $T_{SMTC_intra} = T_{SMTC_inter} = 160$ ms; where T_{SMTC_intra} and T_{SMTC_inter} are periodicities of the SMTC occasions configured for the intra-frequency carrier and the inter-frequency carrier respectively, and
- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and
- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion defined in TS 38.304 [30].

For Rx RedCap not configured with eDRX_IDLE cycle, $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ are specified in Table 17.1.1.0.2.1-1.

For 2 Rx RedCap configured with eDRX_IDLE cycle, $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ are specified in Table 17.1.1.0.2-2 for FR2. The requirements apply provided that the serving cell is configured with eDRX_IDLE and is the same in all PTWs during any of $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ when multiple PTWs are used.

Table 17.1.1.0.2-1: $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Inter_RedCap}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x 1.5 (36 x N1 x 1.5)	1.28 x N1 x 1.5 (4 x N1 x 1.5)	5.12 x N1 x 1.5 (16 x N1 x 1.5)
0.64		5	17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: Applies for RedCap UE of all FR2 power class.					

Table 17.1.1.0.2-2: $T_{detect,NR_Inter_RedCap}$, $T_{measure,NR_Inter_RedCap}$ and $T_{evaluate,NR_Inter_RedCap}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Inter_RedCap}$ [s] (number of DRX cycles or eDRX cycles Note 3)

2.56	-	-	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
5.12	-	-	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	10.24 x N1 (2 x N1)
10.24	-	-	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	20.48 x N1 (2 x N1)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥5.12 (4)	8	$eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1)	0.32 x N1 (1 x N1)	0.64 x N1 (2 x N1)
	0.64	≥6.4 (5)	5		0.64 x N1 (1 x N1)	1.28 x N1 (2 x N1)
	1.28	≥10.24 (8)	4		1.28 x N1 (1 x N1)	2.56 x N1 (2 x N1)
	2.56	≥15.36 (12)	3		2.56 x N1 (1 x N1)	5.12 x N1 (2 x N1)

NOTE 1: Applies for RedCap UE of all power class.
NOTE 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.
NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Inter_RedCap*DRX_cycle}{1.28} \right\rceil * 1.28$.
NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, being configured with eDRX_IDLE cycle, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

17.1.1.0.3 Minimum conformance requirements for intra-frequency cell re-selection for RedCap UE configured with stationary relaxed measurement criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and UE has fulfilled that criterion, or
- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled only the *stationaryMobilityEvaluation* [2] criterion

The requirements defined in clause 17.1.1.0.3 apply for this clause except that:

- $T_{detect,NR_Intra_RedCap_Relax}$ as specified in Table 17.1.1.0.3-1 for 2 Rx RedCap.
- $T_{measure,NR_Intra_RedCap_Relax}$ as specified in Table 17.1.1.0.3-1 for 2 Rx RedCap.
- $T_{evaluate,NR_Intra_RedCap_Relax}$ as specified in Table 17.1.1.0.3-1 for 2 Rx RedCap.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 17.1.1.0.3-2 are applicable for eDRX cycle up to 10.24 s in FR2.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR2, then the requirements in Table 17.1.1.0.3-3 apply provided eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 17.1.1.0.3-1: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UEs fulfilling stationary criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles)

	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x M2 x K3 (36 x N1 x M2 x K3)	1.28 x N1 x M2 x K3 (4 x N1 x M2 x K3)	5.12 x N1 x M2 x K3 (16 x N1 x M2 x K3)
0.64		5	17.92 x N1 x K3 (28 x N1 x K3)	1.28 x N1 x K3 (2 x N1 x K3)	5.12 x N1 x K3 (8 x N1 x K3)
1.28		4	32 x N1 x K3 (25 x N1 x K3)	1.28 x N1 x K3 (1 x N1 x K3)	6.4 x N1 x K3 (5 x N1 x K3)
2.56		3	58.88 x N1 x K3 (23 x N1 x K3)	2.56 x N1 x K3 (1 x N1 x K3)	7.68 x N1 x K3 (3 x N1 x K3)

Note 1: Applies for RedCap UE of all supporting FR2 power classes.
Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T_{detect, NR_intra} is expected.
Note 3: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

Table 17.1.1.0.3-2: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle up to 10.24 s

eDRX_IDLE cycle length [s]	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of eDRX IDLE cycles)
2.56	58.88 x N1 x K3 (23 x N1 x K3)	2.56 x N1 x K3 (1 x N1 x K3)	7.68 x N1 x K3 (3 x N1 x K3)
5.12	117.76 x N1 x K3 (23 x N1 x K3)	5.12 x N1 x K3 (1 x N1 x K3)	10.24 x N1 x K3 (2 x N1 x K3)
10.24	235.52 x N1 x K3 (23 x N1 x K3)	10.24 x N1 x K3 (1 x N1 x K3)	20.48 x N1 x K3 (2 x N1 x K3)

Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.

Table 17.1.1.0.3-3: $T_{detect,NR_Intra_RedCap_Relax}$, $T_{measure,NR_Intra_RedCap_Relax}$ and $T_{evaluate,NR_Intra_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Intra_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥30.72 (24)	8	K3 x $eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K3)	0.32 x N1 x K3 (1 x N1 x K3)	0.64 x N1 x K3 (2 x N1 x K3)
	0.64	≥38.4 (30)	5		0.64 x N1 x K3 (1 x N1 x K3)	1.28 x N1 x K3 (2 x N1 x K3)
	1.28	40.96 (32)	4		1.28 x N1 x K3 (1 x N1 x K3)	2.56 x N1 x K3 (2 x N1 x K3)
	2.56	40.96 (32)	3		20.48	40.96

Note 1: Applies for RedCap UE of all supporting FR2 power classes.
Note 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs.
Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].
Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Intra_RedCap_Relax} * DRX_cycle}{1.28} \right\rceil * 1.28$.
Note 5: The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW.
Note 6: The evaluation shall not be performed across PTW's. In this case the evaluation is performed in the next available PTW.

Note 7:	For DRX cycle length is 0.32s, 0.64s, and 2.56s, K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion. For DRX cycle length is 1.28s, K3 = 4 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.

17.1.1.0.4 Minimum conformance requirements for inter-frequency cell re-selection for RedCap UE configured with stationary relaxed measurement criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and UE has fulfilled that criterion, or
- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled only the *stationaryMobilityEvaluation* [2] criterion, and

The requirements defined in 17.1.1.0.4 apply for this clause except that:

- $T_{detect,NR_Inter_RedCap_Relax}$ as specified in Table 17.1.1.0.4-1 for 2 Rx RedCap.
- $T_{measure,NR_Inter_RedCap_Relax}$ as specified in Table 17.1.1.0.4-1 for 2 Rx RedCap.
- $T_{evaluate,NR_Inter_RedCap_Relax}$ as specified in Table 17.1.1.0.4-1 and for 2 Rx RedCap.
- When Srxlev > $S_{nonIntraSearchP}$ and Squal > $S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every K2*$T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in TS 38.133 [6] in clause 4.2.2.7 and, K2 = 240.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 17.1.1.0.4-2 are applicable for eDRX cycle up to 10.24s in FR2.

If the UE is configured with eDRX_IDLE cycle greater than 10.24s FR2, then the requirements in Table 17.1.1.0.4-3 apply provided that eDRX cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 17.1.1.0.4-1: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Inter_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_Relax}$ [s] (number of DRX cycles)
	FR1	FR2[Note1]			
0.32	1	8	11.52 x N1 x 1.5 x K4 (36 x N1 x 1.5 x K4)	1.28 x N1 x 1.5 x K4 (4 x N1 x 1.5 x K4)	5.12 x N1 x 1.5 x K4 (16 x N1 x 1.5 x K4)
0.64		5	17.92x N1 x K4 (28 x N1 x K4)	1.28 x N1 x K4 (2 x N1 x K4)	5.12 x N1 x K4 (8 x N1 x K4)
1.28		4	32 x N1 x K4 (25 x N1 x K4)	1.28 x N1 x K4 (1 x N1 x K4)	6.4 x N1 x K4 (5 x N1 x K4)
2.56		3	58.88 x N1 x K4 (23 x N1 x K4)	2.56 x N1 x K4 (1 x N1 x K4)	7.68 x N1 x K4 (3 x N1 x K4)
Note 1: Applies for RedCap UE of all supporting power class. Note 2: K4 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.					

Table 17.1.1.0.4-2: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle up to 10.24 s

eDRX_IDLE cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)
2.56	58.88 x N1 x K3 (23 x N1 x K3)	2.56 x N1 x K3 (1 x N1 x K3)	7.68 x N1 x K3 (3 x N1 x K3)

5.12	117.76 x N1 x K3 (23 x N1 x K3)	5.12 x N1 x K3 (1 x N1 x K3)	10.24 x N1 x K3 (2 x N1 x K3)
10.24	235.52 x N1 x K3 (23 x N1 x K3)	10.24 x N1 x K3 (1 x N1 x K3)	20.48 x N1 x K3 (2 x N1 x K3)
Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the *stationaryMobilityEvaluation* [2] criterion.			

Table 17.1.1.0.4-3: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle larger than 10.24 s

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥30.72 (24)	8	K3 x $eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K3)	0.32 x N1 x K3 (1 x N1 x K3)	0.64 x N1 x K3 (2 x N1 x K3)
	0.64	≥38.4 (30)	5		0.64 x N1 x K3 (1 x N1 x K3)	1.28 x N1 x K3 (2 x N1 x K3)
	1.28	40.96 (32)	4		1.28 x N1 x K3 (1 x N1 x K3)	2.56 x N1 x K3 (2 x N1 x K3)
	2.56	40.96 (32)	3		20.48	40.96
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs. Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34]. Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Inter_RedCap \ast DRX_cycle}{1.28} \right\rceil \ast 1.28$. Note 5: For DRX cycle length is 0.32s, 0.64s and 2.56s, K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion. For DRX cycle length is 1.28s, K3 = 4 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.						

17.1.1.1 NR SA FR2 Cell reselection for 2 Rx UE

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

17.1.1.1.1 Test purpose

The purpose of this test is to verify the requirement for the NR SA intra-frequency cell reselection in FR2 for 2 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.3..

17.1.1.1.2 Test applicability

This test applies to all types of NR RedCap UE release 17 and forward.

17.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 17.1.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.1.1.1.

17.1.1.1.4 Test description

17.1.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.1.1.1.4.1-1.

Table 17.1.1.1.4.1-1: Supported test configurations for NR SA FR2 Cell reselection to FR2 intra-frequency NR case for 2 Rx

Configuration	Description
17.1.1.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
17.1.1.1-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 17.1.1.1.4.1-2.

Table 17.1.1.1.4.1-2: Initial conditions for NR SA FR2 Cell reselection to FR2 intra-frequency NR case for 2 Rx

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	Without faders.		

1. The general test parameter settings are set up according to Table 17.1.1.1.4.1-3.
2. Message contents are defined in clause 17.1.1.1.4.3.
3. The test scenario comprises of 1 NR carrier and 2 cells. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table 17.1.1.1.4.1-3: General test parameters for NR SA FR2 Cell reselection to FR2 intra-frequency NR case for 2 Rx

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	
	Neighbour cell		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	

T1	s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, the intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2	135	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2	35	T3 needs to be defined so that cell re-selection reaction time is taken into account.

17.1.1.1.4.2 Test procedure

Two cells are deployed in the test, which are one FR2 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 3 successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Set Cell 2 physical cell identity = initial Cell 2 physical cell identity.
2. Set the parameters according to T1 in Table 17.1.1.1.5-1. T1 starts.
3. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 3) mod 1008) for one iteration of the test procedure loop.
4. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 17.1.1.1.5-1.
5. The SS waits for random access requests information from the UE to perform cell re-selection to a newly detectable cell, Cell 2.
6. If the UE responds on the newly detectable cell, Cell 2 during time duration T2 within 130 seconds from the beginning of time period T2, then count a success for the event “Re-select newly detected Cell 2”. Otherwise count a failure for the event “Re-select newly detected Cell 2”.
7. If the UE has re-selected Cell 2 within T2, after the re-selection or when T2 expires, continue with step 8. Otherwise, if T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 14.
8. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.
9. The SS shall switch the power setting from T2 to T3 as specified in Table 17.1.1.1.5-1.
10. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.
11. If the UE responds on the already detected cell, Cell 1 during time duration T3 within 27 seconds from the beginning of time period T3, then count a success for the event “Re-select already detected Cell 1”. Otherwise count a fail for the event “Re-select already detected Cell 1”.
12. If the UE has re-selected Cell 1 within T3, after the re-selection or when T3 expires, continues with step 12. Otherwise, if T3 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 14.
13. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.
14. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.

15. Repeat step 2-14 until a test verdict has been achieved.
    Each of the events “Re-select newly detected Cell 2” and “Re-select already detected Cell 1” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

17.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 17.1.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 7.1.1.1.4.3-1A: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-69	Actual value is -60*2 = -138dBm	7.1.1.1-1
	-68	Actual value is -68*2+1 = -135dBm	7.1.1.1-2
}			
}			

Table 7.1.1.1.4.3-1B: SIB2 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-1 with condition SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
q-RxLevMin	-60	Actual value is -60*2 = -120dBm	7.1.1.1-1
	-58	Actual value is -58*2 = -116dBm	7.1.1.1-2
s-IntraSearchP	25	Actual value is 25*2 = 50dB	
}			
}			

Table 7.1.1.1.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		
}			

17.1.1.1.5 Test requirement

Table 17.1.1.1.5-1 defines the primary level settings including test tolerances for NR – E-UTRA cell re-selection test case in AWGN for 2 Rx UE.

Table 17.1.1.1.5-1: Cell specific test parameters for NR SA FR2 Cell reselection to FR2 intra-frequency NR case for 2 Rx

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			SR.3.1 TDD		
		2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
		2	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
		2	CCR.3.1 TDD			CCR.3.1 TDD		
SSB configuration		1	SSB.3 FR2			SSB.7 FR2		
		2	SSB.4 FR2			SSB.8 FR2		
OCNG Pattern		1, 2	OP.4			OP.4		
$BW_{channel}$	MHz	1, 2	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1, 2	66			66		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-120 Note 6			-120 Note 6		
		2	-117 Note 6			-117 Note 6		
Pcompensation	dB	1, 2	0			0		
$Qhyst_s$	dB	1, 2	0			0		
$Qoffset_{s,n}$	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.9.1			Setup 1 defined in A.9.1		
$\hat{E}_s/I_{ot\ \mathrm{BB}}$ Note 5	dB	1	7.56	-3.34	1.61	-infinity	1.61	-3.34
		2						
Beam assumption Note 4		1,2	Rough					
N_{oc} Note2	dBm/SCS	1	-93					
		2	-90					
N_{oc} Note2	dBm/15 kHz	1	-102					
		2						
$\hat{E}_s / N_{oc}$	dB	1	8	-2.9	2.05	-infinity	2.05	-2.9
		2						
SSB_RP Note3	dBm/SCS	1	-85	-95.9	-90.9	-infinity	-90.9	-95.9
		2	-82	-92.9	-87.9	-infinity	-87.9	-92.9
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-60.53	-67.37	-65.01	-69.17	-65.01	-67.37
		2	-57.52	-64.39	-62.33	-66.16	-62.33	-64.39
Treselection	s	1, 2	0	0	0	0	0	0
SintrasearchP	dB	1, 2	50			50		
Propagation Condition		1, 2	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SSB_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5:	Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 6:	Including the test tolerance given in Annex F.

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 130 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 27 s.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_Intra} + T_{SI-NR}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_ intra} + T_{SI-NR}$,

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

17.1.1.2 NR SA FR2-FR2 Cell reselection for 2 Rx UE

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

17.1.1.2.1 Test purpose

The purpose of this test is to verify the requirement for the NR SA intra-frequency cell reselection in FR2 for 2 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.4.

17.1.1.2.2 Test applicability

This test applies to all types of NR RedCap UE release 17 and forward.

17.1.1.2.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 17.1.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.1.1.2.

17.1.1.2.4 Test description

17.1.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.1.1.2.4.1-1.

Table 17.1.1.2.4.1-1: Supported test configurations for NR SA FR2-FR2 Cell reselection to FR2 inter-frequency NR for 2 Rx

Configuration	Description for serving cell	Description for target cell
17.1.1.2-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
17.1.1.2-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 17.1.1.2.4.1-2.

Table 17.1.1.2.4.1-2: Initial conditions for NR SA FR2-FR2 Cell reselection to FR2 inter-frequency NR for 2 Rx

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	Without faders.		

1. The general test parameter settings are set up according to Table 17.1.1.2.4.1-3.
2. Message contents are defined in clause 17.1.1.2.4.3.
3. The test scenario comprises of 2 cells on 2 different NR carriers. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table 17.1.1.2.4.1-3: General test parameters for NR SA FR2-FR2 Cell reselection to FR2 inter-frequency NR for 2 Rx

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2	Cell1	
T1 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2	Cell2	
T3 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	

T1	s	1, 2	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2	95	T3 needs to be defined so that cell re-selection reaction time is taken into account.

17.1.1.2.4.2 Test procedure

Two cells on two RF channels are deployed in the test, which are one FR2 NR PCell (Cell 1) on RF channel 1 and an NR neighbour cell (Cell 2) on RF channel 2. The test consists of 3 successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1. Set Cell 2 physical cell identity = initial Cell 2 physical cell identity.

2. Set the parameters according to T1 in Table 17.1.1.2.5-1. T1 starts.

3. The SS waits for random access requests information from the UE to perform cell re-selection on the lower priority cell, Cell 1.

4. If the UE responds on lower priority cell, Cell 1 during time duration T1 within 27 seconds from the beginning of time period T1, then count a success for the event “Re-select lower priority Cell 1”. Otherwise count a fail for the event “Re-select lower priority Cell 1”.

5. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 6a. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 13.

6. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 1.

7. The SS shall switch the power setting from T1 to T2 as specified in Table 17.1.1.2.5-1. During time duration T2, Cell 2 shall be powered OFF and the physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) shall be changed to ensure Cell 2 is not detected by the UE.

8. When T2 expires, the SS shall switch the power setting from T2 to T3 as specified in Table 17.1.1.2.5-1.

9. The SS waits for random access requests information from the UE to perform cell re-selection on the higher priority cell, Cell 2.

10. If the UE responds on higher priority cell, Cell 2 during time duration T3 within 87 seconds from the beginning of time period T3, then count a success for the event “Re-select higher priority Cell 2”. Otherwise count a fail for the event “Re-select higher priority Cell 2”.

11. If the UE has re-selected Cell 2 within T3, after the re-selection or when T3 expires, continues with step 12. Otherwise, if T3 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and continue with step 13.

12. The SS shall send an *RRCRelease* message to ensure that the UE is in state RRC_IDLE on Cell 2.

13. Ensure the UE is in state RRC_IDLE with generic procedure parameters connectivity *NR*, connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5 on Cell 2.

14. Repeat step 2-13 until a test verdict has been achieved.
    Each of the events “Re-select lower priority Cell 1” and “Re-select higher priority Cell 2” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

17.1.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 17.1.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.2-1 for NR Cell 1
Default RRC messages and information elements contents exceptions	

Table 17.1.1.2.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		
}			

Table 17.1.1.2.4.3-3: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-70	Actual value is -62*2 = -140dBm	17.1.1.2-1
	-68	Actual value is -62*2 = -136dBm	17.1.1.2-2
}			
}			

Table 17.1.1.2.4.3-4: SIB2(Cell2)

Derivation Path: Table H.2.2-1 with condition NR Cell 2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	25	Actual value is 25*2 = 50dBm	
threshServingLowP	22	Actual value is 22*2 = 44dBm	
}			
}			

Table 17.1.1.2.4.3-5: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2 with condition NR Cell 1, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			

interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-70	Actual value = -70*2 = -140dBm	17.1.1.2-1
	-68	Actual value = -68*2 = -136dBm	17.1.1.2-2
threshX-HighP	24	Actual value is 24*2 = 48dBm	
}			
}			
}			

Table 17.1.1.2.4.3-6: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2 with condition NR Cell 2, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-70	Actual value = -70*2 = -140dBm	17.1.1.2-1
	-68	Actual value = -68*2 = -136dBm	17.1.1.2-2
threshX-LowP	25	Actual value =25*2 = 50 dBm	
}			
}			
}			

17.1.1.2.5 Test requirement

Table 17.1.1.2.5-1 defines the primary level settings including test tolerances for NR – E-UTRA cell re-selection test case in AWGN for 2 Rx UE.

Table 17.1.1.2.5-1: Cell specific test parameters for NR SA FR2-FR2 Cell reselection to FR2 inter-frequency NR for 2 Rx

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1, 2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET parameters		1, 2	CR.3.1 TDD			CR.3.1 TDD		
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD			CCR.3.1 TDD		
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-140			-124 Note 6		
		2	-137			-121 Note 6		
Pcompensation	dB	1, 2	0			0		
$Qhyst_s$	dB	1, 2	0			0		
$Qoffset_{s,n}$	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		

AoA setup		1, 2	Setup 1 defined in A.9.1			Setup 1 defined in A.9.1		
Beam assumption[Note 4]		1,2	Rough			Rough		
$\hat{E}_s/I_{ot\ \mathrm{BB}}$ [Note 5]	dB	1	10.06	10.06	7.56	-3.34	-infinity	8.06
		2						
N_{oc} [Note2]	dBm/SCS	1	-93			-93		
		2	-90			-90		
N_{oc} [Note2]	dBm/15 kHz	1	-102			-102		
		2						
$\hat{E}_s/N_{oc}$	dB	1	10.5	10.5	8	2.9	-infinity	8.5
		2						
SSB_RP [Note3]	dBm/SCS	1	-82.5	-82.5	-85	95.9	-infinity	84.5
		2	-79.5	-79.5	-82	-92.9	-infinity	-91.5
Io	dBm/95.04 MHz	1, 2	-53.11	-53.11	-55.34	-62.18	-63.98	-54.91
Treselection	s	1, 2	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2	50			62 [Note 6]		
$\mathrm{Thresh}_{x,\ highP}$	dB	1, 2	32 [Note 6]			48		
$\mathrm{Thresh}_{serving,\ lowP}$	dB	1, 2	44			62 [Note 6]		
$\mathrm{Thresh}_{x,\ lowP}$	dB	1, 2	50			18 [Note 6]		
Propagation Condition		1, 2	AWGN			AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 6: Including the test tolerance given in Annex F.

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 87 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 27 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate,\ NR_inter} + T_{SI\text{-}NR}$, and to a lower priority cell can be expressed as: $T_{evaluate,\ NR_inter} + T_{SI\text{-}NR}$,

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

17.1.1.3 NR SA FR2 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.

- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

17.1.1.3.1 Test purpose

The purpose of this test is to verify the requirement for the NR SA intra-frequency cell reselection in FR2 for 2 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.9.2..

17.1.1.3.2 Test applicability

This test applies to all types of NR RedCap UE release 17 and forward supporting Rel-17 relaxed RRM measurements of neighbour cells in RRC_IDLE/RRC_INACTIVE.

17.1.1.3.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 17.1.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.17.1.1.3.

17.1.1.3.4 Test description

17.1.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.1.1.3.4.1-1.

Table 17.1.1.3.4.1-1: Supported test configurations for NR SA FR2 Cell reselection to FR2 intra-frequency NR for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Configuration	Description
17.1.1.3-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
17.1.1.3-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 17.1.1.3.4.1-2.

Table 17.1.1.3.4.1-2: Initial conditions for NR SA FR2 Cell reselection to FR2 intra-frequency NR for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	Without faders.		

1. The general test parameter settings are set up according to Table 17.1.1.3.4.1-3.
2. Message contents are defined in clause 17.1.1.3.4.3.
3. The test scenario comprises of 1 NR carrier and 2 cells. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. During T1 and T2, only criteria *stationaryMobilityEvaluation* is configured and fulfilled. UE has not registered with network for the tracking area containing cell2.

Table 17.1.1.3.4.1-3: General test parameters for NR SA FR2 Cell reselection to FR2 intra-frequency NR for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2	Cell2	
T1 end condition	Active cell		1, 2	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1,2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	100	
T2		s	1, 2	100	

17.1.1.3.4.2 Test procedure

Two cells are deployed in the test, which are one FR2 NR PCell (Cell 1) and an NR neighbour cell (Cell 2) on the same frequency. The test consists of 2 successive time periods, with time duration of T1, T2 respectively. Both cell 1 and cell2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas.

The UE is configured only low mobility criterion defined in clause 5.2.4.9.1 in TS 38.304 [30]. So, Cell 1 configures the UE as follows:

- *stationaryMobilityEvaluation-r17* [2] is configured according to the parameters listed in Table 17.1.1.3.5-1;
- cellEdgeEvaluationWhileStationary-r17 [2] is not configured;
- combineRelaxedMeasCondition2-r17 [2] is not configured

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 17.1.1.3.5-1. T1 starts.
3. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 2.
4. If the UE responds on Cell 2 during time duration T1 within 155 seconds from the beginning of time period T1, then count a success for cell reselection. Otherwise count a fail for cell reselection.
5. If the UE has re-selected Cell 2 within T1, after the re-selection or when T1 expires, continue with step 6. Otherwise, if T1 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and skip to step 11.

6 The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE.

6. The SS shall switch the power setting from T1 to T2 as specified in Table 17.1.1.3.5-1. T2 starts.

8. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 1.

9. If the UE responds to Cell 1 during time duration T2 within 155 seconds from the beginning of time period T2, then count a success for cell reselection. Otherwise count a fail for cell reselection.

10. If T2 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and continue with step 11.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

12. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

17.1.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 17.1.1.3.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	Table H.2.1-2
Default RRC messages and information elements contents exceptions	

Table 17.1.1.3.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		
}			

Table 17.1.1.3.4.3-2A: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-70	Actual value is -70*2 = -140dBm	17.1.1.3-1
	-68	Actual value is -68*2 = -136dBm	17.1.1.3-2
}			
}			

Table 7.1.1.3.4.3-3: SIB2

Derivation Path: Table H.2.1-1 with condition SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
intraFreqCellReselectionInfo SEQUENCE {			
q-RxLevMin	-70	Actual value is -70*2 = -140dBm	17.1.1.3-1
	-68	Actual value is -68*2 = -136dBm	17.1.1.3-2
s-IntraSearchP	25	Actual value is 25*2 = 50dB	
}			

relaxedMeasurement-r17 SEQUENCE {			
stationaryMobilityEvaluation-r17 SEQUENCE {			
s-SearchDeltaP-Stationary-r17	dB6		
t-SearchDeltaP-Stationary-r17	s5		
}			
cellEdgeEvaluationWhileStationary-r17	Not present		
combineRelaxedMeasCondition2-r17	Not present		
}			
}			

17.1.1.3.5 Test requirement

Table 17.1.1.3.5-1 defines the primary level settings including test tolerances for NR – E-UTRA cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE.

Table 17.1.1.3.5-1: Cell specific test parameters for NR SA FR2 Cell reselection to FR2 intra-frequency NR for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	SSB.3 FR2		SSB.7 FR2	
		2	SSB.4 FR2		SSB.8 FR2	
OCNG Pattern		1, 2	OP.4		OP.4	
Initial DL BWP configuration		1, 2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Initial UL BWP configuration		1, 2	66		66	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-120 Note 6		-120 Note 6	
		2	-117 Note 6		-117 Note 6	
$S_{SearchDeltaP-Stationary}$	dB	1, 2	6		6	
$T_{SearchDeltaP-Stationary}$	s	1,2	5		5	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s,n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.9.1		Setup 1 defined in A.9.1	
Beam assumption Note 4		1,2	Rough		Rough	
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1	-3.34	1.61	1.61	-3.64
		2				
N_{oc} Note2	dBm/SCS	1	-93			
		2	-90			
N_{oc} Note2	dBm/15 kHz	1	-102			
		2				
$\hat{E}_s / N_{oc}$	dB	1	-2.9	2.05	2.05 Note 6	-2.9
		2				
SSB_RP Note3	dBm/SCS	1	-95.9	-90.9	-90.9	-95.9
		2	-92.9	-87.9	-87.9	-92.9

Io on SSB symbols of each cell	dBm/95.04 MHz	1	-67.37	-65.01	-65.01	-67.37
		2	-64.36	-62.00	-62.00	-64.36
Treselection	s	1, 2	0	0	0	0
SintrasearchP	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation. Note 5: Calculation of Es/IotBB includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBP from TS 38.101-2 [19] Table 6.2.1.3-4. Note 6: Including the test tolerance given in Annex F.						

The cell reselection delay to an already detected cell for UE fulfilling stationary relaxed criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 155 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detectable cell can be expressed as: $T_{evaluate,NR_Intra_RedCap_Relax}$ + T_{SI-NR},

Where:

$T_{evaluate,NR_Intra_RedCap_Relax}$ See Table 4.2B.2.9.2-2 in clause 4.2B.2.9.2,

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 154.88 s, allow 155 s for the cell re-selection delay to an already detected cell for UE fulfilling stationary criterion in the test case.

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

17.1.1.4 NR SA FR2-FR2 Cell reselection for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

17.1.1.4.1 Test purpose

The purpose of this test is to verify the requirement for the NR SA intra-frequency cell reselection in FR2 for 2 Rx RedCap UEs. The requirements are specified in TS 38.133 [6] in clause 4.2B.2.10.2.

17.1.1.4.2 Test applicability

This test applies to all types of NR RedCap UE release 17 and forward supporting Rel-17 relaxed RRM measurements of neighbour cells in RRC_IDLE/RRC_INACTIVE.

17.1.1.4.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 17.1.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.17.1.1.4.

17.1.1.4.4 Test description

17.1.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.1.1.4.4.1-1.

Table 17.1.1.4.4.1-1: Supported test configurations for NR SA FR2-FR2 Cell reselection to FR2 inter-frequency NR for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE

Configuration	Description for serving cell	Description for target cell
17.1.1.4-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
17.1.1.4-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Configure the test equipment and the DUT according to the parameters in Table 17.1.1.4.4.1-2.

Table 17.1.1.4.4.1-2: Initial conditions for NR SA FR2-FR2 Cell reselection to FR2 inter-frequency NR for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	Without faders.		

1. The general test parameter settings are set up according to Table 17.1.1.4.4.1-3.
2. Message contents are defined in clause 17.1.1.4.4.3.
3. The test scenario comprises of 2 cells (Cell 1 and Cell 2) on 2 different NR carriers respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Cell 2 is of higher priority than Cell 1. The UE is configured with *stationaryMobilityEvaluation* criterion.

Table 17.1.1.4.4.1-3: General test parameters for NR SA FR2-FR2 Cell reselection to FR2 inter-frequency NR for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell2 and fulfils stationary (*stationaryMobilityEvaluation* [2]) criterion.
	Neighbour cell		1, 2	Cell1	

T1 final condition	Active cell		1, 2	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2	Cell2	
T2 final condition	Active cell		1, 2	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell			Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μs	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	TBD	
			2	TBD	
SMTC configuration			1, 2	TBD	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	85	T1 needs to be long enough to allow cell re-selection to already known cell1
T2		s	1, 2	85	T2 needs to be long enough to allow cell re-selection to already known cell2

17.1.1.4.4.2 Test procedure

The test consists of one active cell and one neighbour cell on two different NR RF channels. The UE is requested to monitor the neighbouring cell on one of the NR carriers. The test consists of two successive time periods, with time duration of T1, T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1.

The UE is configured only low mobility criterion defined in clause 5.2.4.9.1 in TS 38.304 [30]. So, Cell 1 configures the UE as follows:

- *stationaryMobilityEvaluation-r17* [2] is configured according to the parameters listed in Table 17.1.1.4.5-1;
- cellEdgeEvaluationWhileStationary-r17 [2] is not configured;
- combineRelaxedMeasCondition2-r17 [2] is not configured

In the following test procedure “UE responds” means “UE starts transmitting preamble on PRACH for sending the RRC SETUP REQUEST message to perform a Registration procedure for mobility.

1. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to T1 in Table 17.1.1.5.5-1. T1 starts.
3. The SS waits for random access requests information from the UE to perform cell re-selection to Cell 1.
4. If the UE responds on lower priority Cell 1 during time duration T1 within 155 seconds from the beginning of time period T1, then count a success for the event “Re-select lower priority Cell 1”. Otherwise count a fail for the event “Re-select lower priority Cell 1”
5. If the UE has re-selected Cell 1 within T1, after the re-selection or when T1 expires, continue with step 7. Otherwise, if T1 expires and the UE has not yet re-selected Cell 1, the TE shall switch off and on the UE and skip to step 11.
6. The SS shall send an RRCConnectionRelease to ensure that the UE is in state RRC_IDLE.
7. The SS shall switch the power setting from T1 to T2 as specified in Table 17.1.1.5.5-1. T2 starts.
8. The SS waits for random access requests information from the UE to perform cell re-selection to an already detected cell, Cell 2.

9. If the UE responds to higher priority Cell 2 during time duration T2 within 155 seconds from the beginning of time period T2, then count a success for the event “Re-select higher priority Cell 2”. Otherwise count a fail for the event “Re-select higher priority Cell 2”

10. If T2 expires and the UE has not yet re-selected Cell 2, the TE shall switch off and on the UE and continue with step 11.

11. Ensure the UE is in state RRC_IDLE with generic procedure parameters Connectivity NR, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

12. Repeat step 2-11 until a test verdict has been achieved.
    Each of the events “Re-select lower priority Cell 1” and “Re-select higher priority Cell 2” is evaluated independently for the statistic, resulting in an event verdict: pass or fail. Each event is evaluated only until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved. Different events may require different times for a verdict.
    If both events pass, the test passes. If one event fails, the test fails.

17.1.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 17.1.1.5.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	

Table 17.1.1.5.4.3-2: *RACH-ConfigGeneric*: NR cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.3-130			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigGeneric ::= SEQUENCE {			
prach-ConfigurationIndex	190		
}			

Table 17.1.1.5.4.3-2A: SIB1 (Cell 1 and Cell 2)

Derivation Path: Table H.2.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-70	Actual value is -62*2 = -140dBm	17.1.1.5-1
	-68	Actual value is -62*2 = -136dBm	17.1.1.5-2
}			
}			

Table 17.1.1.5.4.3-3: SIB2 (Cell 1 and Cell 2)

Derivation Path: Table H.2.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	25	Actual value is 25*2 = 50	Cell 2
threshServingLowP	22	Actual value is 22*2 = 44	

cellReselectionPriority	4		Cell 1
	5		Cell 2
}			
relaxedMeasurement-r17 SEQUENCE {			
stationaryMobilityEvaluation-r17 SEQUENCE {			
s-SearchDeltaP-Stationary-r17	dB6		
t-SearchDeltaP-Stationary-r17	s5		
}			
cellEdgeEvaluationWhileStationary-r17	Not present		
combineRelaxedMeasCondition2-r17	Not present		
}			
}			

Table 17.1.1.5.4.3-4: SIB4 (Cell 1)

Derivation Path: Table H.2.2-2 with condition NR Cell 1, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-70	Actual value = -70*2 = -140dBm	17.1.1.2-1
	-68	Actual value = -68*2 = -136dBm	17.1.1.2-2
threshX-HighP	24	Actual value is 24*2 = 48dBm	
}			
}			
}			

Table 17.1.1.5.4.3-5: SIB4 (Cell 2)

Derivation Path: Table H.2.2-2 with condition NR Cell 2, SMTC.1 and Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF InterFreqCarrierFreqInfo {	1 Entry		
InterFreqCarrierFreqInfo[1] SEQUENCE {		Entry 1	
q-RxLevMin	-70	Actual value = -70*2 = -140dBm	17.1.1.2-1
	-68	Actual value = -68*2 = -136dBm	17.1.1.2-2
threshX-LowP	25	Actual value = 25*2 = 50dBm	
}			
}			
}			

17.1.1.4.5 Test requirement

Table 17.1.1.4.5-1 defines the primary level settings including test tolerances for NR – E-UTRA cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE.

Table 17.1.1.4.5-1: Cell specific test parameters for NR SA FR2-FR2 Cell reselection to FR2 inter-frequency NR for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2

TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-124 Note6	
		2	-137		-121 Note6	
Pcompensation	dB	1, 2	0		0	
$Qhyst_s$	dB	1, 2	0		0	
$Qoffset_{s,n}$	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.9.1		Setup 1 defined in A.9.1	
Beam assumption Note 4		1, 2	Rough		Rough	
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	10.06	7.56	-3.34	-8.06
N_{oc} Note2	dBm/SCS	1	-93		-93	
		2	-90		-90	
N_{oc} Note2	dBm/15 kHz	1, 2	-102		-102	
$\hat{E}_s/N_{oc}$	dB	1, 2	10.5	8	-2.9	8.5
SSB_RP Note3	dBm/SCS	1	-82.5	-85	-95.9	-84.5
		2	-79.5	-82	-92.9	-81.5
Io	dBm/95.04 MHz	1	-53.14	-55.37	-62.18	-54.91
		2	-58.10	-60.189	-62.18	-54.91
TreselectionNR	s	1, 2	0		0	
SnonintrasearchP	dB	1, 2	50		Not sent	
$S_{SearchDeltaP-Stationary}$	dB	1, 2	12 Note6		12 Note6	
$T_{SearchDeltaP-Stationary}$	s	1, 2	5		5	
$Thresh_{x,highP}$	dB	1, 2	32 Note6		48	
$Thresh_{serving,lowP}$	dB	1, 2	44		62 Note6	
$Thresh_{x,lowP}$	dB	1, 2	50		18 Note6	
Propagation Condition		1, 2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SSB_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 6: Including the test tolerance given in Annex F.

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling stationary criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 155 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling stationary criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 155 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap_Relax} + T_{SI\text{-}NR}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{evaluate,NR_Inter_RedCap_Relax} + T_{SI\text{-}NR}$

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

17.2 RRC_INACTIVE state mobility for RedCap

17.2.1 Configured Grant based Small Data Transmissions for RedCap

17.2.1.0 Minimum conformance requirements

17.2.1.0.1 Minimum conformance requirements for TA validation using CG-SDT

The requirements in this clause are applicable when the UE is configured with timing alignment (TA) validation using cg-SDT-RSRP-ChangeThreshold for transmitting in uplink using CG-SDT as specified in TS 38.331 [13].

The requirements in this clause are applicable for the UE performing small data tranmissions using configured resources as TS 38.331 [13].

The UE is allowed to transmit using the configured uplink resources provided that the UE is synchronized towards (i.e. using the timing derived using the latest available N_{TA} value as specified in subclause 7.1.2) the serving cell prior to transmission. If the UE is not able to obtain the synchronization towards the serving cell then the UE shall drop the small data transmission. The UE determines the small data transmission occasion according to the received CG-SDT configuration as specified in TS 38.331 [13].

When *cg-SDT-RSRP-ChangeThreshold* [13] is configured for TA validation based on the RSRP change criterion according to clause 5.8.2 in [12], the UE is allowed to transmit using CG-SDT using the timing derived using the latest available N_{TA} value as specified in TS 38.133 [6] subclause 7.1 provided that

- the first RSRP ($RSRP_1$) measurement and the second RSRP ($RSRP_2$) measurements used in the TA validation are valid measurements and,
- timing alignment validation for transmission using CG-SDT is valid according to the validation criteria in clause 5.8.2 in [12].

$RSRP_1$ and $RSRP_2$ are considered valid provided that the conditions in Table 17.2.1.0.1-1 are met for FR2-1 regardless of whether the UE is configured with eDRX cycle by serving gNB or core network (AMF).

Table 17.2.1.0.1-1 Valid measurement for FR2-1

Measurement	FR2-1
$RSRP_1$	(T1 – max{480ms, 8*SMTC periodicity}) ≤ T1' ≤ (T1 + max{480ms, 8*SMTC periodicity})
$RSRP_2$	(T2 – max{480ms, 8*SMTC periodicity}) ≤ T2' ≤ T2

If at least one of $RSRP_1$ and $RSRP_2$ is considered to be invalid based on the above conditions, then the UE shall not validate the CG-SDT using $RSRP_1$ and $RSRP_2$ and shall not transmit using CG-SDT. Additionally, for the initial CG-SDT transmission, the UE shall not transmit in an CG-SDT occasion that occurs more than 640 ms after T2.

Where:

- T1 is the time when
  - *RRCRelease* with CG-SDT configuration (TS 38.331 [2]) is received, or
  - the latest TA is received if TA is received while in RRC_INACITVE state.
- T1' is the time when the UE has completed $RSRP_1$.
- T2 is the time when the UE performs TA validation as defined in TS 38.321 [12] clause 5.27.2 for transmission using CG-SDT.
- T2' is the time when the UE has completed $RSRP_2$.
- T_{DRX} is the DRX cycle length in ms.
- M1 the scaling factor as defined in TS 38.133 [6] clause 4.2.2.2.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [11] the following restrictions apply due to SS-RSRP/RSRQ measurement

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.
- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH on all symbols within SMTC window duration.

For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [11] the following restrictions apply due to measurement of serving cell.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/ on SSB symbols of the serving cell.

The UE is not required to meet the following measurement requirements during subsequent SDT transmissions:

- Measurements of inter-frequency NR cells in TS 38.133 [6] clause 5.1.2.4
- Measurements of inter-RAT E-UTRAN cells in TS 38.133 [6] clause 5.1.2.5
- Idle Mode CA/DC Measurements in TS 38.133 [6] clause 5.4

The UE is allowed to delay the reception of PRS resources on the positioning frequency layer until the SDT session is completed if the measurement using PRS resource overlaps with the SDT resources.

The normative reference for this requirement is TS 38.133 [6] clauses 5.2B.

17.2.1.1 NR SA FR2 TA validation for CG-SDT for 2 Rx UE

Editor's Note: This test case is incomplete in following aspects:

- Test procedure needs further updates;

- TT analysis is still missing.

17.2.1.1.1 Test purpose

To verify that the UE properly perform TA validation for CG-SDT transmission as specified in TS 38.133 [6] clause 5.2B.2.1.

17.2.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards and supporting CG-SDT.

17.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.2.1.1.

17.2.1.1.4 Test description

17.2.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.2.1.1.4.1 with following exceptions:

- Table 7.2.1.1.4.1-1 is replaced by Table 17.2.1.1.4.1-1;
- Table 7.2.1.1.4.1-2 is replaced by Table 17.2.1.1.4.1-2;
- Table 7.2.1.1.4.1-3 is replaced by Table 17.2.1.1.4.1-3;

Table 17.2.1.1.4.1-1: Supported test configurations

Config	Description
17.2.1.1-1	NR TDD, SSB SCS 120 kHz, data SCS 120KHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.2.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1-1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.2.1.1.4.1-3: General test parameters

Parameter	Unit	Value
		Test 1
Active PCell		Cell 1
RF Channel Number		1
Duplex mode		TDD
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66
DL initial BWP configuration		DLBWP.0.1
UL initial BWP configuration		ULBWP.0.1
TDD Configuration		TDDConf.3.1
RMSI CORESET Reference Channel		CR.3.1 TDD
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	120

PRACH Configuration		PRACH.4 FR2
OCNG parameters		OP.5
CP length		Normal
Correlation Matrix and Antenna Configuration		2x2 Low
DRX	s	0.64
cg-SDT-RSRP-ThresholdSSB	dBm	[-110]
cg-SDT-RSRP-ChangeThreshold	dB	8
cg-SDT-TimeAlignmentTime		infinity
CG-SDT resource period	ms	320
T_delay_modeB	s	4
T1	s	[0.8]
T2	s	[0.96]
T3	s	[3.04]
T4	s	[2.12]
T5	s	[4.58]

17.2.1.1.4.2 Test procedure

Same as the test procedure given in clause 7.2.1.1.4.2.

17.2.1.1.4.3 Message contents

Same as the message contents given in 7.2.1.1.4.3.

17.2.1.1.5 Test requirements

Same as the test requirements given in clause 7.2.1.1.5 with following exceptions:

- Table 7.2.1.1.5-1 is replaced by Table 17.2.1.1.5-1.

Table 17.2.1.1.5-1: Cell-specific test parameters (NR Cell 1)

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				
Assumption for UE beams Note 4		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	4				
EPRE ratio of PDCCH to PDCCH DMRS	dB	0				
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					
N_{oc}	dBm/15kHz	[-98]+TT				
N_{oc}	dBm/SCS	[-89] +TT				
$\hat{E}_s / I_{ot}$	dB	[0] +TT	[10.35] +TT	[0] +TT	[15.25] +TT	[6] +TT
$\hat{E}_s / N_{oc}$	dB	[0] +TT	[10.35] +TT	[0] +TT	[15.25] +TT	[6] +TT
SS-RSRP	dBm/SCS	[-89] +TT	[-78.65] +TT	[-89] +TT	[-73.75] +TT	[-83] +TT
Io	dBm/95.04 MHz	[-57] +TT	[-49.27] +TT	[-57] +TT	[-44.63] +TT	[-53.04] +TT
Propagation condition		AWGN				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in TS 38.133 [6] B.2.1.3 and does not limit UE implementation or test system implementation.

17.3 RRC_CONNECTED state mobility for RedCap

17.3.1 Handover for RedCap

17.3.1.0 Minimum conformance requirements

17.3.1.0.1 Minimum conformance requirements for NR FR2 – NR FR2 handover

The purpose of NR handover is to change the NR PCell to another NR cell for RedCap UE. The requirements in this clause are applicable to SA NR.

Handover for a RedCap UE is defined as intra-frequency handover if the center frequency and subcarrier spacing (SCS) of the reference SSB of the serving cell is same as the center frequency and SCS of the reference SSB of the target cell, where:

The reference SSB of the serving cell is the SSB in the active DL BWP of serving cell

The reference SSB of the target cell is the SSB in the first active DL BWP of the target cell upon reconfiguration.

The requirements in this clause apply for the following handover scenarios:

Handover to a target cell's initial DL BWP associated with CD-SSB;

Handover to a target cell's Redcap specific DL BWP associated with NCD-SSB.

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR2 cell to NR FR2 cell.

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ msec from the end of the last TTI containing the RRC command.

Where:

$D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [13] plus the interruption time.

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell which depends on whether the target cell is already known when the handover command is received by the UE.

- If the target cell is a known intra-frequency cell, T_{search} = 0ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot≥-2 dB, then $T_{search} = 8*T_{rs}$ ms.

- If the target cell is a known inter-frequency cell, then

  if the measured SSB is the target SSB for HO of the target cell, T_{search} = 0 ms;

  if the measured SSB and the target SSB for HO belong to the same NR target cell and fulfil the following conditions, $T_{search} = T_{rs}$ ms:

- CD-SSB in initial DL BWP is the measured SSB and NCD-SSB in RedCap specific DL BWP is the target SSB for HO
- NCD-SSB in RedCap specific DL BWP is the measured SSB and CD-SSB in initial DL BWP is the target SSB for HO
- Both measured SSB and the target SSB for HO are NCD-SSBs within different RedCap specific DL BWPs

Otherwise, the target cell is an unknown inter-frequency cell. In this case, if the target cell Es/Iot≥-2 dB, then T_{search} = 24* T_{rs} ms.

Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = T_{rs} for both known and unknown target cell.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the Table 8.1-1 of TS 38.213 [8].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cellin the handover command, otherwise,

- T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing as NCD-SSB indicated by nonCellDefiningSSB-r17 if the first active DL BWP included in handover command is configured with nonCellDefiningSSB-r17, otherwise, as CD-SSB indicated by absoluteFrequencySSB in frequencyInfoDL in handover command.
- If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In FR2, the target cell is known if it has been meeting the following conditions:

- At least one of the SSBs measured belongs to the same NR target cell,
- During the last 5 seconds before the reception of the handover command:
  - the UE has sent a valid measurement report for the target cell and
  - at least one of the SSBs measured which belongs to the same NR target cell remains detectable according to the cell identification requirements as described in TS 38.133 [6] clause 9.2B for intra-frequency measurements and TS 38.133 [6] clause 9.3B for inter-frequency measurements,
- The reference SSB of the NR target cell also remains detectable during the handover delay according to the cell identification requirements are described in TS 38.133 [6] clause 9.2B for intra-frequency handover and TS 38.133 [6] clause 9.3B for inter-frequency handover.

Otherwise, it is unknown.

The normative reference for this requirement is TS 38.133 [6] clauses 6.1D.1.1 and 6.1D.1.3.

17.3.1.1 NR SA FR2 handover with unknown target cell for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3.

- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

17.3.1.1.1 Test purpose

To verify the requirement for the NR FR2 intra frequency handover requirements specified in TS 38.133 [6] clause 6.1D.1.3.

17.3.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards and supporting FR2.

17.3.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.3.1.1.

17.3.1.1.4 Test description

17.3.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.3.1.2.4.1 with following exceptions:

- Table 7.3.1.2.4.1-1 is replaced by Table 17.3.1.1.4.1-1;
- Table 7.3.1.2.4.1-2 is replaced by Table 17.3.1.1.4.1-2;
- Table 7.3.1.2.4.1-3 is replaced by Table 17.3.1.1.4.1-3;

Table 17.3.1.1.4.1-1: Supported test configurations

Config	Description
17.3.1.1-1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.3.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.3.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.3.1.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 µs	Synchronous cells
T1		s	5	
T2		s	≤10	

17.3.1.1.4.2 Test procedure

Same as the test procedure given in clause 7.3.1.2.4.2.

17.3.1.1.4.3 Message contents

Same as the message contents given in 7.3.1.2.4.3.

17.3.1.1.5 Test requirements

Same as the test requirements given in clause 7.3.1.2.5 with following exceptions:

- Table 7.3.1.2.5-1 is replaced by Table 17.3.1.1.5-1.

Table 17.3.1.1.5-1: Cell-specific test parameters (NR Cell 1)

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams[Note 6]			Rough		Rough	
AoA setup			Setup 1 as defined in A.9			
NR RF Channel Number			1			
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR.3.1 TDD			
RMSI CORESET Reference Channel			CR.3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration			SSB.3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120			
PUCCH/PUSCH subcarrier spacing		kHz	120			
PRACH configuration			PRACH.1 FR2			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS[Note 1]						
EPRE ratio of OCNG to OCNG DMRS [Note 1]						
N_{oc} [Note2]		dBm/15kHz	-104.7			
N_{oc} [Note2]		dBm/SCS	-95.7			
$\hat{E}_s / I_{ot}$		dB	6	-1.8	-Infinity	0
$\hat{E}_s / N_{oc}$		dB	6	6	-Infinity	7
Io[Note3]		dBm/ BW	-59.7	-56.7	-59.7	-56.7
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

17.3.1.2 NR SA FR2-FR2 handover with unknown target cell for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3.
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz17.3.1.2.1 Test purpose

To verify the requirement for the NR FR2 NCD-SSB to NR FR2 NCD-SSB inter frequency handover requirements specified in TS 38.133 [6] clause 6.1D.1.3

17.3.1.2.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards and supporting FR2.

17.3.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.3.1.2.

17.3.1.2.4 Test description

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively.

- At the start of time duration T1, the UE does not have any timing information of Cell 2.
- Starting T2, Cell 2 becomes detectable and the UE receives an RRC handover command from the network indicating the UE to handover to Cell 2 with *firstActiveDownlinkBWP-Id* configured to DL BWP and *firstActiveUplinkBWP-Id* configured to UL BWP, where Cell 2's DL BWP is the Redcap specific BWP associated with NCD-SSB, then UE handover from cell 1's NCD-SSB to cell 2's specific Redcap BWP associated with NCD-SSB. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

17.3.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.3.1.2.4.1-1.

Table 17.3.1.2.4.1-1: Supported test configurations

Configuration	Description
17.3.1.2-1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 17.3.1.2.4.1-2.

Table 17.3.1.2.4.1-2: Initial conditions

Parameter	Value	Comment

Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.3.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 17.3.1.2.4.3.

2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR2 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Tables 17.3.1.2.4.1-3 and 17.3.1.2.5-1 below.

Table 17.3.1.2.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	≤10	

17.3.1.2.4.2 Test procedure

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell and its RedCap-specific dedicated BWP is the activated BWP. The SS transmits NCD-SSB on Cell 1 with an absolute frequency (in ARFCN value) of

$$f_{\mathrm{NCDSSB}} = f_{\mathrm{pointA}} + \frac{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}} \cdot \left[\left(f_{\mathrm{CDSSB}} - f_{\mathrm{pointA}}\right) \cdot \frac{\Delta\mathrm{F}_{\mathrm{Global}}}{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}} \right] + \frac{N_{\mathrm{SC}}^{\mathrm{SSB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}}$$

where,

- f_{CDSSB} is the absolute frequency of Cell 1 CD-SSB (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;

- f_{pointA} is the absolute frequency of Point A (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;

- $\Delta\mathrm{F}_{\mathrm{Global}}$ is the granularity of the global frequency raster (in kHz) specified in 38.101-1 [2] clause 5.4.2.1;

- $\mathrm{SCS}_{\mathrm{SSB}}$ is the subcarrier spacing of SSB (in kHz);

- $N_{\mathrm{SC}}^{\mathrm{RB}} = 12$, is the number of subcarriers in an RB;

- $N_{\mathrm{SC}}^{\mathrm{SSB}} = 240$, is the number of subcarriers in an SSB.

2. Set the parameters according to T1 in Table 17.3.1.2.5-1.

3. Set NR Cell 2 physical cell identity = (current NR cell 2 physical cell identity + 1) mod 1008 for current iteration of the test procedure loop

4. SS shall transmit an *RRCReconfiguration* message implying handover to the RedCap-specific dedicated BWP of Cell 2.

5. At the instant when the last TTI containing the *RRCReconfiguration* message in step 4) is sent to the UE, the SS shall switch the power settings from T1 to T2 as specified in Table 17.3.1.2.5-1. T2 starts. The SS transmits NCD-SSB on Cell 2 with an absolute frequency (in ARFCN value) of

$$f_{\mathrm{NCDSSB}} = f_{\mathrm{pointA}} + \frac{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}} \cdot \left[\left(f_{\mathrm{CDSSB}} - f_{\mathrm{pointA}}\right) \cdot \frac{\Delta\mathrm{F}_{\mathrm{Global}}}{N_{\mathrm{SC}}^{\mathrm{RB}}\mathrm{SCS}_{\mathrm{SSB}}} \right] + \frac{N_{\mathrm{SC}}^{\mathrm{SSB}}\mathrm{SCS}_{\mathrm{SSB}}}{\Delta\mathrm{F}_{\mathrm{Global}}}$$

where,

- f_{CDSSB} is the absolute frequency of Cell 2 CD-SSB (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- f_{pointA} is the absolute frequency of Point A (in ARFCN value) specified in 38.508-1 [14] clause 7.2.3.1;
- $\Delta\mathrm{F}_{\mathrm{Global}}$ is the granularity of the global frequency raster (in kHz) specified in 38.101-1 [2] clause 5.4.2.1;
- $\mathrm{SCS}_{\mathrm{SSB}}$ is the subcarrier spacing of SSB (in kHz);
- $N_{\mathrm{SC}}^{\mathrm{RB}} = 12$, is the number of subcarriers in an RB;
- $N_{\mathrm{SC}}^{\mathrm{SSB}} = 240$, is the number of subcarriers in an SSB.

6. If the UE transmits a PRACH preamble to Cell 2 satisfying the delay requirement specified in clause 17.3.1.2.5 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

7. After T2 expires, the SS shall

   - transmit an *RRCReconfiguration* message to cause the UE handover back to Cell 1. if the handover fails, switch off and on the UE

   or

   - switch off and on the UE.

8. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell and its RedCap-specific dedicated BWP is the activated BWP. The SS transmits NCD-SSB on Cell 1 with an absolute frequency given in step 1.

9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

17.3.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 17.3.1.2.4.3-1: *RRCReconfiguration* (Step 1, 4 and 8, test procedure)

Derivation Path: Table H.3.2-2 with condition RBConfig_KeyChange			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 17.3.1.2.4.3-2	
}			
}			
}			
}			

Table 17.3.1.2.4.3-2: *CellGroupConfig* (Table 17.3.1.2.4.3-1)

Derivation Path: Table H.3.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**

CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			
smtc	SMTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2 RedCap		
}			
spCellConfigDedicated	ServingCellConfig	Table 17.3.1.2.4.3-3	
}			

Table 17.3.1.2.4.3-3: *ServingCellConfig* (Table 17.3.1.2.4.3-2)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1]	BWP-Downlink	entry 1 Table 17.3.1.2.4.3-4	
}			
firstActiveDownlinkBWP-Id	1	Activate the RedCap-specific dedicated DL BWP	
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 17.3.1.2.4.3-5	
}			
firstActiveUplinkBWP-Id	1	Activate the RedCap-specific dedicated UL BWP	
}			
}			
}			

Table 17.3.1.2.4.3-4: *BWP-Downlink* (Table 17.3.1.2.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to DLBWP.1.3 RedCap corresponding to NCD-SSB PRB index		
}			
}			
bwp-Dedicated SEQUENCE {			
nonCellDefiningSSB-r17 SEQUENCE {			
absoluteFrequencySSB-r17	ARFCN-ValueNR of NCD-SSB		
ssb-Periodicity-r17	ms80		
ssb-TimeOffset-r17	Not present		
}			
}			
}			

Table 17.3.1.2.4.3-5: *BWP-Uplink* (Table 17.3.1.2.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {	BWP-UplinkCommon		
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to ULBWP.1.3 RedCap. The starting PRB index for dedicated UL BWP is the same as the corresponding RedCap-specific dedicated DL BWP		
}			
}			
}			

17.3.1.2.5 Test requirement

Table 17.3.1.2.5-1 defines the primary level settings including test tolerances for all tests.

Table 17.3.1.2.5-1: Cell specific test parameters

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams Note 6			Rough		Rough	
AoA setup			Setup 1 as defined in A.9.1			
NR RF Channel Number			**1**		**2**	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRX Cycle		ms	Not Applicable			
PDSCH RMC			SR.3.1 TDD			
RMSI CORESET RMC			CR.3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			OP. 1			
SMTC Configuration for CD-SSB			SMTC.1			
SMTC Configuration for NCD-SSB			SMTC.2 RedCap			
CD-SSB Configuration			SSB.3 FR2			
NCD-SSB Configuration			SSB.3 RedCap FR2 Note 7			
PDSCH/PDCCH subcarrier spacing		kHz	120			
PUCCH/PUSCH subcarrier spacing		kHz	120			
PRACH configuration			PRACH.1 FR2			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.3 RedCap Note 8			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.3 RedCap Note 9			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						

N_{oc} Note2	dBm/15kHz	-104.7		-104.7	
N_{oc} Note2	dBm/SCS	-95.7		-95.7	
$\hat{E}_s / I_{ot}$	dB	5	5	-Infinity	5
$\hat{E}_s / N_{oc}$	dB	5	5	-Infinity	5
Io Note3	dBm/Ch BW	-60.5	-60.5	-66.7	-60.5+TT
Propagation condition	-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7: NCD-SSB is configured within dedicated RedCap DL BWP and CD-SSB is configured completely outside the dedicated RedCap DL BWP
Note 8: The starting PRB index for dedicated DL BWP corresponding to NCD-SSB PRB index
Note 9: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to NCD-SSB PRB index

The handover delay is measured from the beginning of time period T2 to the time that the UE transmit the first PRACH to Cell 2, which is calculated as follows:

Handover delay = RRC procedure delay + $T_{interrupt}$

- RRC procedure delay = 10 ms, is the RRC processing delay specified in TS 38.331 [13] clause 12,
- $T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, is the interruption time specified in TS 38.133 [6] clause 6.1D.1.2.
  - T_{search} = 1920 ms, is the time required to search the unknown target cell;
  - T_{IU} = 20 ms, is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell.
  - $T_{processing}$ = 20 ms, is time for UE processing;
  - T_{Δ} = 80 ms, is time for fine time tracking and acquiring full timing information of the target cell;
  - T_{margin} = 2 ms, is time for SSB post-processing.

This gives a total of 2052 ms.

17.3.2 RRC connection mobility control for RedCap

17.3.2.1 RRC re-establishment for RedCap

17.3.2.1.0 Minimum conformance requirements

The requirements in clause 7.3.2.1.0 shall apply.

The normative reference for this requirement is TS 38.133 [6] clause 6.2.1B.

17.3.2.1.1 NR SA FR2 Intra-frequency RRC Re-establishment in FR2

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

The test is incomplete for UE power classes other than PC3 (e.g. PC7)

The test is incomplete for test frequencies > 40.8 GHz

17.3.2.1.1.1 Test purpose

To verify hat the NR intra-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in 38.133 [6] clause 6.2.1B

17.3.2.1.1.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards.

17.3.2.1.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.3.2.1.0

The normative reference for this requirement is TS 38.133 [6] clause A.17.3.2.1.1

17.3.2.1.1.4 Test description

17.3.2.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.3.2.1.1.4.1 with following exceptions:

- Table 7.3.2.1.1.4.1-2 is replaced by Table 17.3.2.1.1.4.1-1.

Table 17.3.2.1.1.4.1-1: General test parameters

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 μs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 RedCap FR2	
SMTC configuration			1	SMTC.1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	PRACH.1 FR2	As specified in Annex A.7
T1		s	1	5	
T2		s	1	4.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1	5	

17.3.2.1.1.4.2 Test procedure

Same as the test procedure given in clause 7.3.2.1.1.4.2.

17.3.2.1.1.4.3 Message contents

Same as the message contents given in clause 7.3.2.1.1.4.3.

17.3.2.1.1.5 Test requirement

Same as the test requirements given in clause 7.3.2.1.1.5 with following exceptions:

- Table 7.3.2.1.1.5-1 is replaced by Table 17.3.2.1.1.5-1.

Table 17.3.2.1.1.5-1: Cell specific test parameters

Parameter	Unit	Test config	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 FDD			CR.3.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 FDD			CCR.3.1 FDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1			OP.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
AoA setup		1	Setup 1			Setup 1		
$\hat{E}_s/I_{ot}$	dB	1	-0.12	-infinity	-infinity	-3.46	2	2
N_{oc} Note2	dBm/ SCS	1	-104.7					
N_{oc} Note2	dBm/ 15 kHz	1	-95.7					
$\hat{E}_s/N_{oc}$	dB	1	4	-infinity	-infinity	2	2	2
SS-RSRP Note3	dBm/ SCS	1	-91.7	-infinity	-infinity	-93.7	-93.7	-93.7
Io	dBm/ 95.04 MHz	1	-64.00	-66.95	-66.95	-64.00	-66.95	-66.95
Propagation Condition		1	AWGN					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in TS 38.133 [6] Annex B.2.1.3, and does not limit UE implementation or test system implementation

17.3.2.1.2 NR SA FR2-FR2 Inter-frequency RRC Re-establishment in FR2

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

The test is incomplete for UE power classes other than PC3 (e.g. PC7)

The test is incomplete for test frequencies > 40.8 GHz

17.3.2.1.2.1 Test purpose

To verify that the NR inter-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in 38.133 [6] clause 6.2.1B

17.3.2.1.2.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards.

17.3.2.1.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.3.2.1.0

The normative reference for this requirement is TS 38.133 [6] clause A.17.3.2.1.2

17.3.2.1.2.4 Test description

17.3.2.1.2.4.1 Initial conditions

Same as the initial conditions given in clause 7.3.2.1.2.4.1 with following exceptions:

- Table 7.3.2.1.2.4.1-2 is replaced by Table 17.3.2.1.2.4.1-1.

Table 17.3.2.1.2.4.1-1: General test parameters

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1,2	
Time offset between cells			1	3 µs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 RedCap FR2	
SMTC configuration			1	SMTC.1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	PRACH.1 FR2	As specified in Annex A.7
T1		s	1	5	
T2		s	1	4.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1	6	

17.3.2.1.2.4.2 Test procedure

Same as the test procedure given in clause 7.3.2.1.2.4.2.

17.3.2.1.2.4.3 Message contents

Same as the message contents given in clause 7.3.2.1.2.4.3.

17.3.2.1.2.5 Test requirement

Same as the test requirements given in clause 7.3.2.1.2.5 with following exceptions:

- Table 7.3.2.1.2.5-1 is replaced by Table 17.3.2.1.2.5-1.

Table 17.3.2.1.2.5-1: Cell specific test parameters

Parameter	Unit	Test config	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams Note 4			Rough			Rough		
AoA setup		1	Setup 3					
			AoA1			AoA2		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
$BW_{channel}$	MHz	1	100: $N_{RB,c}$ = 66			100: $N_{RB,c}$ = 66		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
N_{oc} Note2	dBm/15 kHz	1	-92.3 Note 6			-92.3 Note 6		
N_{oc} Note2	dBm/SCS	1	-83.3			-83.3		
$\hat{E}_s / N_{oc}$	dB	1	0	-infinity	-infinity	-infinity	-infinity	0
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1	-1.05	-infinity	-infinity	-infinity	-infinity	-1.05
SSB_RP Note3	dBm/SCS	1	-83.3	-infinity	-infinity	-infinity	-infinity	-83.3
Io	dBm/95.04 MHz	1	-55.66	-58.68	-58.68	-58.68	-58.68	-55.66
Propagation Condition		1	AWGN			AWGN		

Note 1: OCNG shall be used such that a constant total transmitted power is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 6: Including the test tolerance given in Annex F.

17.3.2.1.3 NR SA FR2 RRC re-establishment without serving cell timing

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

17.3.2.1.3.1 Test purpose

To verify that the NR intra-frequency RRC re-establishment delay in FR2 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

17.3.2.1.3.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.3.2.1.3.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.3.2.1.0

The normative reference for this requirement is TS 38.133 [6] clause A.17.3.2.1.3

17.3.2.1.3.4 Test description

17.3.2.1.3.4.1 Initial conditions

Same as the initial condition given in clause 7.3.2.1.3.4.1 with following exception:

- Table 7.3.2.1.3.4.1-1 is replaced by Table 17.3.2.1.3.4.1-1
- Table 7.3.2.1.3.4.1-2 is replaced by Table 17.3.2.1.3.4.1-2
- Table 7.3.2.1.3.4.1-3 is replaced by Table 17.3.2.1.3.4.1-3

Table 17.3.2.1.3.4.1-1: Supported test configurations

Configuration	Description
17.3.2.1.3-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table 17.3.2.1.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5.1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2		
Channel bandwidth	As specified by the test configuration selected from Table 17.3.2.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram			

Table 17.3.2.1.3.4.1-3: General test parameters

Parameter		Unit	Test config	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 μs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	6000	Radio link failure timer configured by *RLF-TimersAndConstants*
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 RedCap FR2	
SMTC configuration			1	SMTC.1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	PRACH.1 FR2	Table A.3.8.3.1-1
T1		s	1	5	
T2		s	1	10.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133 [6]
T3		s	1	5	

17.3.2.1.3.4.2 Test procedure

Same as the test procedure given in clause 7.3.2.1.3.4.2.

17.3.2.1.3.4.3 Message contents

Same as the message contents 7.3.2.1.3.4.3.

17.3.2.1.3.5 Test requirement

Same as the test requirements given in clause 7.3.2.1.3.5 with following exceptions:

- Table 7.3.2.1.3.5-1 is replaced by Table 17.3.2.1.3.5-1.

Table 17.3.2.1.3.5-1: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams[Note 4]			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 FDD			CR.3.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 FDD			CCR.3.1 FDD		
TRS configuration		1	TRS.2.1 TDD			N/A		

PDSCH/PDCCH TCI state		1	TCI.State.2			N/A			
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1			
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1			
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1			
RLM-RS		1	SSB			SSB			
AoA setup		1	Setup 1			Setup 1			
$\hat{E}_s / I_{ot}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5	
N_{oc} Note2	dBm/15 kHz	1	-104.7						
N_{oc} Note2	dBm/SCS	1	-95.7						
$\hat{E}_s / N_{oc}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5	
SS-RSRP Note3	dBm/SCS	1	-90.7	-infinity	-infinity	-infinity	-infinity	-90.7	
Io	dBm/95.04 MHz	1	-60.52	-66.71	-60.52	-60.52	-66.71	-60.52	
Propagation Condition		1	AWGN						

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

17.3.2.2 Random access for RedCap

17.3.2.2.0 Minimum conformance requirements

17.3.2.2.0.1 Minimum conformance requirements for Contention based random access

The minimum conformance requirements given in clause 7.3.2.2.0.1 are applicable for TDD RedCap UEs.

The normative reference for this requirement is TS 38.133 [6] clause 6.2.2B.2.

17.3.2.2.0.2 Minimum conformance requirements for Non-Contention based random access

The minimum conformance requirements given in clause 7.3.2.2.0.2 are applicable for TDD RedCap UEs.

The normative reference for this requirement is TS 38.133 [6] clause 6.2.2B.2.

17.3.2.2.1 NR SA FR2 4-step RA type contention based random access for 2 Rx UE

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The settable window for first preamble uplink power and the uplink calibration process are FFS.
- The test requirement for absolute uplink power is FFS.
- The test requirement for relative uplink power is FFS.
- The uncertainty value and test requirement for PRACH timing are in [ ]
- TT analysis is missing.

- Antenna diagram and any exceptions are FFS
- Connection setup in Annex C is FFS

17.3.2.2.1.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in TS 38.133 [6] clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

17.3.2.2.1.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.3.2.2.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.3.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.3.2.2.1.

17.3.2.2.1.4 Test description

17.3.2.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.3.2.2.1.4.1 with following exceptions:

- Table 7.3.2.2.1.4.1-1 is replaced by Table 17.3.2.2.1.4.1-1.
- Table 7.3.2.2.1.4.1-2 is replaced by Table 17.3.2.2.1.4.1-2.

Table 17.3.2.2.1.4.1-1: Supported test configurations

Config	Description
17.3.2.2.1-1	NR PCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table 17.3.2.2.1.4.1-2: Test Environment

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] subclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.3.2.2.1.4.1-1.		
Propagation conditions	No interference		As specified in Annex C.2.1.
Connection Diagram	TE Part	FFS	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	FFS	
Exceptions to connection diagram			

17.3.2.2.1.4.2 Test procedure

Same as the test procedure given in clause 7.3.2.2.1.4.2.

17.3.2.2.1.4.3 Message contents

Same as the message contents given in clause 7.3.2.2.1.4.3.

17.3.2.2.1.5 Test requirement

Same as the test requirements given in clause 7.3.2.2.1.5 with following exception:

- Table 7.3.2.2.1.5-1 is replaced by Table 17.3.2.2.1.5-1.
- Table 7.3.2.2.1.5-2 is replaced by Table 17.3.2.2.1.5-2.

Table 17.3.2.2.1.5-1: General test parameters

Parameter	Unit	Test-1	Comments
SSB Configuration		SSB.1 FR2	As defined in A.3.2
CSI-RS for tracking		TRS.2.1 TDD	
Duplex Mode		TDD	
TDD Configuration		TDDConf.3.1	As defined in A.1.5
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		24	
OCNG Pattern Note 1		OP.1	As defined in A.2.1
PDSCH Reference Channel Note 2		SR.3.1 TDD	As defined in A.1.1
RMSI CORESET Reference Channel		CR.3.1 TDD	As defined in A.1.2
NR RF Channel Number		1	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS	dB		
EPRE ratio of PBCH to PBCH_DMRS	dB		
EPRE ratio of PDCCH_DMRS to SSS	dB		
EPRE ratio of PDCCH to PDCCH_DMRS	dB		
EPRE ratio of PDSCH_DMRS to SSS	dB		
EPRE ratio of PDSCH to PDSCH_DMRS	dB		
ss-PBCH-BlockPower	dBm/SCS	+20 +Δ_{UL}	As defined in TS 38.331 [13]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,\ c}$)	dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 of TS 38.101-2 [3]
PRACH Configuration		PRACH.1 FR2	As defined in A.7.2, with exceptions as defined below
rsrp-ThresholdSSB	dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower	dBm	-100	As defined in TS 38.331 [13]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.

Note 4: The Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 17.3.2.2.1.5-2: OTA-related test parameters

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.9.1
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	

	SSB_RP	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	
Note 1: No artificial noise is applied in this test. Note 2: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].				

17.3.2.2.2 NR SA FR2 4-step RA type non-contention based random access for 2 Rx UE

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The settable window for first preamble uplink power and the uplink calibration process are FFS.
- The test requirement for absolute uplink power is FFS.
- The test requirement for relative uplink power is FFS.
- The uncertainty value and test requirement for PRACH timing are in [ ]
- TT analysis is missing
- Antenna diagram and any exceptions are FFS
- Connection setup in Annex C is FFS

17.3.2.2.2.1 Test purpose

To verify that the behaviour of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in TS 38.133 [6] clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

17.3.2.2.2.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards. Additionally Test 2 is applicable to NR RedCap UEs that supports CSI-RS based Random Access Preamble.

17.3.2.2.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.3.2.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.3.2.2.2.

17.3.2.2.2.4 Test description

17.3.2.2.2.4.1 Initial conditions

Same as the initial conditions given in clause 7.3.2.2.2.4.1 with following exceptions:

- Table 7.3.2.2.2.4.1-1 is replaced by Table 17.3.2.2.2.4.1-1.
- Table 7.3.2.2.2.4.1-2 is replaced by Table 17.3.2.2.2.4.1-2.

Table 17.3.2.2.2.4.1-1: Supported test configurations

Config	Description
17.3.2.2.2-1	NR PCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table 17.3.2.2.2.4.1-2: Test Environment

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] subclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.3.2.2.2.4.1-1.		
Propagation conditions	No interference		As specified in Annex C.2.1.
Connection Diagram	TE Part	FFS	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	FFS	
Exceptions to connection diagram			

17.3.2.2.2.4.2 Test procedure

Same as the test procedure given in clause 7.3.2.2.2.4.2.

17.3.2.2.2.4.3 Message contents

Same as the message contents given in clause 7.3.2.2.2.4.3.

17.3.2.2.2.5 Test requirement

Same as the test requirements given in clause 7.3.2.2.2.5 with following exception:

- Table 7.3.2.2.2.5-1 is replaced by Table 17.3.2.2.2.5-1.
- Table 7.3.2.2.2.5-2 is replaced by Table 17.3.2.2.2.5-2.

Table 17.3.2.2.2.5-1: General test parameters

Parameter	Unit	Test-1	Test-2	Comments
SSB Configuration		SSB.1 FR2	SSB.1 FR2	As defined in A.3.2
CSI-RS for tracking		TRS.2.1 TDD	TRS.2.1 TDD	
CSI-RS Configuration		N/A	CSI-RS.3.1 TDD	As defined in A.1.4
Duplex Mode		TDD	TDD	
TDD Configuration		TDDConf.3.1	TDDConf.3.1	As defined in A.1.5
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	100: $N_{RB,c}$ = 66	
Data RBs allocated		24	24	
OCNG Pattern Note 1		OP.3	OP.3	As defined in A.2.1.
PDSCH Reference Channel Note 2		SR.3.1 TDD	SR.3.1 TDD	As defined in A.1.1.
RMSI CORESET Reference Channel		CR.3.1 TDD	CR.3.1 TDD	As defined in A.1.2
NR RF Channel Number		1	1	
EPRE ratio of PSS to SSS	dB	0	0	
EPRE ratio of PBCH_DMRS to SSS	dB			
EPRE ratio of PBCH to PBCH_DMRS	dB			
EPRE ratio of PDCCH_DMRS to SSS	dB			
EPRE ratio of PDCCH to PDCCH_DMRS	dB			
EPRE ratio of PDSCH_DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH_DMRS	dB			
ss-PBCH-BlockPower	dBm/ SCS	+20 +Δ_{UL}	+20 +Δ_{UL}	As defined in TS 38.331 [13]. Δ_{UL} is derived from the uplink calibration process Note 3

Configured UE transmitted power ($P_{CMAX,\ f,c}$)	dBm	maximum value configurable for certain power class	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [3]
PRACH Configuration		PRACH.2 FR2	PRACH.3 FR2	As defined in A.7.2, with exceptions as defined below.
rsrp-ThresholdSSB	dBm	RSRP_69 +Δ_{DL}	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower	dBm	-100	-100	As defined in TS 38.331 [13]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 3: The Δ_{UL} value is calculated as -ROUND(P_{PRACH0} -1), where P_{PRACH0} is the measured first PRACH power with -80.6dBm/SCS applied, *preambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.
Note 4: The Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 17.3.2.2.2.5-2: OTA-related test parameters

Parameter		Unit	Test-1	Test-2	Comments
AoA setup			Setup 1	Setup 1	As defined in A.9.1
Assumption for UE beams Note 2			Rough	Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	-80.6	Power of SSB with index 0 is set to be above configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	-80.6	
	Es/Iot_{BB}	dB	21.09	21.09	
	Io	dBm/ 95.04 MHz	-56.01	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	-95.0	Power of SSB with index 1 is set to be below configured *rsrp-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	-95.0	
	Es/Iot_{BB}	dB	6.69	6.69	
	Io	dBm/ 95.04 MHz	-70.41	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	No external noise (Note 3)	

Note 1: No artificial noise is applied in this test.
Note 2: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

17.3.2.2.3 NR SA FR2 2-step RA type contention based random access for 2 Rx UE

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The settable window for first preamble uplink power and the uplink calibration process are FFS.
- The test requirement for absolute uplink power is FFS.
- The test requirement for relative uplink power is FFS.
- The uncertainty value and test requirement for PRACH timing are in [ ]
- TT analysis is missing

- Antenna diagram and any exceptions are FFS
- Connection setup in Annex C is FFS

17.3.2.2.3.1 Test purpose

To verify that the behaviour of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in TS 38.133 [6] clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

17.3.2.2.3.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards supporting 2-step RACH.

17.3.2.2.3.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.3.2.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.3.2.2.3.

17.3.2.2.3.4 Test description

17.3.2.2.3.4.1 Initial conditions

Same as the initial conditions given in clause 7.3.2.2.3.4.1 with following exceptions:

- Table 7.3.2.2.3.4.1-1 is replaced by Table 17.3.2.2.3.4.1-1.
- Table 7.3.2.2.3.4.1-2 is replaced by Table 17.3.2.2.3.4.1-2.

Table 17.3.2.2.3.4.1-1: Supported test configurations

Config	Description
17.3.2.2.3-1	NR PCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table 17.3.2.2.3.4.1-2: Test Environment

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] subclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.3.2.2.3.4.1-1.		
Propagation conditions	No interference		As specified in Annex C.2.1.
Connection Diagram	TE Part	FFS	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	FFS	
Exceptions to connection diagram			

17.3.2.2.3.4.2 Test procedure

Same as the test procedure given in clause 7.3.2.2.3.4.2.

17.3.2.2.3.4.3 Message contents

Same as the message contents given in clause 7.3.2.2.3.4.3.

17.3.2.2.3.5 Test requirement

Same as the test requirements given in clause 7.3.2.2.3.5 with following exception:

- Table 7.3.2.2.3.5-1 is replaced by Table 17.3.2.2.3.5-1.
- Table 7.3.2.2.3.5-2 is replaced by Table 17.3.2.2.3.5-2.

Table 17.3.2.2.3.5-1: General test parameters

Parameter	Unit	Test-1	Comments
SSB Configuration		SSB.1 RedCap FR2	As defined in A.3.10
Duplex Mode for Cell 1		TDD	
TDD Configuration		TDDConf.3.1	As defined in A.3.1.4
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1		OCNG pattern 1	As defined in A.3.2.1.
PDSCH Reference Channel Note 2		SR.3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel		CR.3.1 TDD	As defined in A.3.1.2
NR RF Channel Number		1	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS	dB		
EPRE ratio of PBCH to PBCH_DMRS	dB		
EPRE ratio of PDCCH_DMRS to SSS	dB		
EPRE ratio of PDCCH to PDCCH_DMRS	dB		
EPRE ratio of PDSCH_DMRS to SSS	dB		
EPRE ratio of PDSCH to PDSCH_DMRS	dB		
ss-PBCH-BlockPower	dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,c}$)	dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration		FR2 MsgA configuration 1	As defined in A.3.20.3, with exceptions as defined below
msgA-RSRP-ThresholdSSB	dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
preambleReceivedTargetPower	dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.

Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

Note 3: The Δ_{UL} value is calculated as -ROUND(PMsgA0 -1), where PMsgA0 is the measured first MsgA PRACH power with -80.6dBm/SCS applied, *msgA-PreambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.

Note 4: The Δ_{DL} value is calculated as (RSRP_$_{REP}$ – RSRP_76), where RSRP_$_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 17.3.2.2.3.5-2: OTA-related test parameters

Parameter		Unit	Test-1	Comments
AoA setup			Setup 2b	As defined in A.9.2
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	

	SSB_RP	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	
Note 1: No artificial noise is applied in this test. Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].				

17.3.2.2.4 NR SA FR2 2-step RA type non-contention based random access for 2 Rx UE

Editor's note: This test case is incomplete. The following aspects are either missing or not yet determined:

- The settable window for first preamble uplink power and the uplink calibration process are FFS.
- The test requirement for absolute uplink power is FFS.
- The test requirement for relative uplink power is FFS.
- The uncertainty value and test requirement for PRACH timing are in [ ]
- TT analysis is missing
- Antenna diagram and any exceptions are FFS
- Connection setup in Annex C is FFS

17.3.2.2.4.1 Test purpose

To verify that the behaviour of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in TS 38.133 [6] clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

17.3.2.2.4.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards and supporting 2-step RACH.

17.3.2.2.4.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.3.2.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.3.2.2.4.

17.3.2.2.4.4 Test description

17.3.2.2.4.4.1 Initial conditions

Same as the initial conditions given in clause 7.3.2.2.4.4.1 with following exceptions:

- Table 7.3.2.2.4.4.1-1 is replaced by Table 17.3.2.2.4.4.1-1.
- Table 7.3.2.2.4.4.1-2 is replaced by Table 17.3.2.2.4.4.1-2.

Table 17.3.2.2.4.4.1-1: Supported test configurations

Config	Description
17.3.2.2.4-1	NR PCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table 17.3.2.2.4.4.1-2: Test Environment

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] subclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.3.2.2.4.4.1-1.		
Propagation conditions	No interference		As specified in Annex C.2.1.
Connection Diagram	TE Part	FFS	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	FFS	
Exceptions to connection diagram			

17.3.2.2.4.4.2 Test procedure

Same as the test procedure given in clause 7.3.2.2.4.4.2.

17.3.2.2.4.4.3 Message contents

Same as the message contents given in clause 7.3.2.2.4.4.3.

17.3.2.2.4.5 Test requirement

Same as the test requirements given in clause 7.3.2.2.4.5 with following exception:

- Table 7.3.2.2.4.5-1 is replaced by Table 17.3.2.2.4.5-1.
- Table 7.3.2.2.4.5-2 is replaced by Table 17.3.2.2.4.5-2.

Table 17.3.2.2.4.5-1: General test parameters

Parameter	Unit	Test-1	Comments
SSB Configuration		SSB.1 RedCap FR2	As defined in A.3.10
Duplex Mode for Cell 1		TDD	
TDD Configuration		TDDConf.3.1	As defined in A.3.1.4
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 24	
OCNG Pattern Note 1		OP.3	As defined in A.3.2.1.
PDSCH Reference Channel Note 2		SR.3.1 TDD	As defined in A.3.1.1.
NR RF Channel Number		1	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS	dB		
EPRE ratio of PBCH to PBCH_DMRS	dB		
EPRE ratio of PDCCH_DMRS to SSS	dB		
EPRE ratio of PDCCH to PDCCH_DMRS	dB		
EPRE ratio of PDSCH_DMRS to SSS	dB		
EPRE ratio of PDSCH to PDSCH_DMRS	dB		
ss-PBCH-BlockPower	dBm/ SCS	+20 +Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{CMAX,\ f,c}$)	dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration		FR2 MsgA configuration 1	As defined in A.3.20.3, with exceptions as defined below
msgA-RSRP-ThresholdSSB	dBm	RSRP_69 +Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process Note 4

preambleReceivedTargetPower	dBm	-100	As defined in TS 38.331 [2]

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 3: The Δ_{UL} value is calculated as -ROUND(PMsgA0 -1), where PMsgA0 is the measured first MsgA PRACH power with -80.6dBm/SCS applied, *msgA-PreambleReceivedTargetPower* = -100dBm and *ss-PBCH-BlockPower* = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.
Note 4: The Δ_{DL} value is calculated as ($RSRP_{REP}$ – RSRP_76), where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.

Table 17.3.2.2.4.5-2: OTA-related test parameters

Parameter		Unit	Test-1	Comments
AoA setup			Setup 2b	As defined in A.9.2
Assumption for UE beams Note 2			Rough	
SSB with index 0	Es Note1	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es Note1	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured *msgA-RSRP-ThresholdSSB*
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot_{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	

Note 1: No artificial noise is applied in this test.
Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

17.3.2.3 RRC Connection Release with Redirection for RedCap

17.3.2.3.0 Minimum conformance requirements

17.3.2.3.0.1 Minimum conformance requirements for FR2-FR2 RRC connection release with redirection

The minimum requirements given in clause 7.3.2.3.0.1 shall apply.

17.3.2.3.1 NR SA FR2-FR2 RRC connection release with redirection for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3.
- The test is incomplete for UE power classes other than PC3
-- The test is incomplete for test frequencies > 40.8 GHz

17.3.2.3.1.1 Test purpose

To verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3A.2.1.

17.3.2.3.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards and supporting FR2.

17.3.2.3.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.3.2.3.0.1.

The normative reference for this requirement is TS 38.133 [6] A.17.3.2.3.1.

17.3.2.3.1.4 Test description

17.3.2.3.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.3.2.3.1.4.1 with following exceptions:

- Table 7.3.2.3.1.4.1-1 is replaced by Table 17.3.2.3.1.4.1-1;
- Table 7.3.2.3.1.4.1-2 is replaced by Table 17.3.2.3.1.4.1-2;
- Table 7.3.2.3.1.4.1-3 is replaced by Table 17.3.2.3.1.4.1-3;

Table 17.3.2.3.1.4.1-1: Supported test configurations

Configuration	Description
17.3.2.3.1-1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table 17.3.2.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.15 and TS 38.508-1 [14] clause 4.3.1 and 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 17.3.2.3.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.3.2.3.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	3.2	

17.3.2.3.1.4.2 Test procedure

Same as the test procedure given in clause 7.3.2.3.1.4.2.

17.3.2.3.1.4.3 Message contents

Same as the message contents given in clause 7.3.2.3.1.4.3.

17.3.2.3.1.5 Test requirement

Same as the test requirements given in 7.3.2.3.1.5 with followings exception:

- Table 7.3.2.3.1.5-1 is replaced by Table 17.3.2.3.1.5-1.

Table 17.3.2.3.1.5-1: Cell specific test parameters

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams Note 6			Rough		Rough	
AoA setup			Setup 1 as defined in A.9			
NR RF Channel Number			1		2	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
Data RBs allocated			66			
DRX Cycle		ms	Not Applicable			
PDSCH RMC			SR.3.1 TDD			
RMSI CORESET RMC			CR.3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			OP.1			
SMTC configuration			SMTC.1			
SSB Configuration			SSB.3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120			
PUCCH/PUSCH subcarrier spacing		kHz	120			
PRACH configuration			PRACH.1 FR2			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
N_{oc} Note2		dBm/15kHz	-104.7		-104.7	
N_{oc} Note2		dBm/SCS	-95.7		-95.7	
$\hat{E}_s / I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	5	5	-Infinity	5
Io Note3		dBm/BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

17.4 Timing for RedCap

17.4.1 UE transmit timing for RedCap

17.4.1.0 Minimum Conformance Requirements

17.4.1.0.1 Minimum conformance requirements for UE transmit timing accuracy

The UE shall have capability to follow the frame timing change of the reference cell in connected state or when transmiting PUSCH on CG resources for SDT in RRC_Inactive. The uplink frame transmission takes place $(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_{\mathrm{c}}$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell. UE initial transmit timing accuracy and gradual timing adjustment requirements are defined in the following requirements.

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 17.4.1.0.1-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS, or it is the PRACH transmission, or it is the msgA transmission.
- when it is the transmission for PUSCH on CG resources for SDT in RRC_Inactive.

The UE shall meet the T_e requirement for an initial transmission provided that at least one SSB (CD-SSB or NCD-SSB) is available at the UE for acquiring the frame timing of the reference cell during the last 160 ms on the condition that:

- the SSB is within the UE's active BWP, or
- the SSB is not within the UE's active BWP, and the measurement gap is configured.

The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_{\mathrm{c}}$. The downlink timing is defined as the time when the first ~~detected~~ path (in time) of the corresponding downlink frame used by the UE to determine downlink timing is received from the reference cell at UE antenna. N_{TA} for PRACH is defined as 0.

$(N_{\mathrm{TA}} + N_{\mathrm{TA\ offset}}) \times T_{\mathrm{c}}$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in TS 38.133 [6] clause 7.3A was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{\mathrm{TA\ offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{\mathrm{TA\ offset}}$ is defined in Table Table 17.4.1.0.1-2.

Table 17.4.1.0.1-1: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_e
2	240	120	$3*64*T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 17.4.1.0.1-2: The Value of $N_{\mathrm{TA\ offset}}$

Frequency range and band of cell used for uplink transmission	$N_{\mathrm{TA\ offset}}$ (Unit: T_c)
FR2	13792

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell except when the timing advance in TS 38.133 [6] clause 7.3A is applied.

When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$ then the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{TA} + N_{TA\ offset}) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q.

2) The minimum aggregate adjustment rate shall be T_p per second.

3) The maximum aggregate adjustment rate shall be T_q per 200 ms.

   where the maximum autonomous time adjustment step T_q and the aggregate adjustment rate T_p are specified in Table 17.4.1.0.1-3.

Table 17.4.1.0.1-3: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (kHz)	T_q	T_p
2	120	2.5*64*T_c	2.5*64*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]			

The normative reference for this requirement is TS.38.133 [6] clause 7.1A.1 and 7.1A.2.

17.4.1.1 NR SA FR2 NR UE Transmit Timing accuracy for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3.
- The test is incomplete for UE power classes other than PC3

-The test is incomplete for test frequencies > 40.8 GHz

17.4.1.1.1 Test purpose

To verify that the UE can follow frame timing change of the connected gNB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in TS 38.133 [6] clause 7.1A.2.

17.4.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onward and supporting FR2.

17.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.4.1.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.17.4.1.1

17.4.1.1.4 Test Description

17.4.1.1.4.1 Initial Conditions

Same as the initial conditions given in clause 7.4.1.1.4.1 with following exceptions:

- Table 7.4.1.1.4.1-1 is replaced by Table 17.4.1.1.4.1-1;

- Table 7.4.1.1.4.1-2 is replaced by Table 17.4.1.1.4.1-2;

Table 17.4.1.1.4.1-1: Supported test configurations

Configuration	Description
17.4.1.1-1	NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz

Table 17.4.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.4.1.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

17.4.1.1.4.2 Test procedure

Same as the test procedure given in 7.4.1.1.4.2.

17.4.1.1.4.3 Message contents

Same as the message contents given in 7.4.1.1.4.3.

17.4.1.1.5 Test Requirements

Same as the test requirements given in 7.4.1.1.5 with following exceptions:

- Table 7.4.1.1.5-1 is replaced by Table 17.4.1.1.5-1;
- Table 7.4.1.1.5-2 is replaced by Table 17.4.1.1.5-2;
- Table 7.4.1.1.5-3 is replaced by Table 17.4.1.1.5-3;
- Table 7.4.1.1.5-4 is replaced by Table 17.4.1.1.5-4;
- Table 7.4.1.1.5-5 is replaced by Table 17.4.1.1.5-5;

Table 17.4.1.1.5-1: Cell specific test parameters

Parameter	Unit	Test1	Test2
SSB ARFCN		Freq1	Freq1
Duplex Mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		66	
Initial BWP Configuration		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		DLBWP.1.1 ULBWP.1.1	
TRS Configuration		TRS.2.1 TDD	
PDSCH/PDCCH TCI state		TCI.State.2	
DRx Cycle	ms	N/A	DRX.8[Note2]
PDSCH Reference measurement channel		SR.3.3 TDD	
RMSI CORESET Reference Channel		CR.3.2 TDD	
Dedicated CORESET Reference Channel		CCR.3.7 TDD	
OCNG Patterns		OP.1	
SSB Configuration		SSB.4 FR2	
SMTC Configuration		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	120	

EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition		AWGN	
SRS Config		SRSConf.1Note3	SRSConf.2Note3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: DRX related parameters are given in Table A.5-1 Note 3: SRS configs are given in Table A.17.4.1.1.5-2			

Table 17.4.1.1.5-2: SRS Configurations

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	17	17	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1,0	sl2560,4	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

Table 17.4.1.1.5-3: OTA related test parameters

Parameter	Unit	Test 1	Test 2
Angle of arrival configuration		Setup 1 defined in A.9.1	
Assumption for UE beamsNote 5		Fine	
N_{oc} Note1	dBm/15kHzNote3	-112	
N_{oc} Note1	dBm/SCS	-100	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRPNote2	dBm/SCS Note3	-96	
$\hat{E}_s / I_{ot}$	dB	4	
IoNote2	dBm/95.04 MHz Note4	-68.5	

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 4: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 5: Information about types of UE beam is given in TS 38.133 [6] section B.2.1.3, and does not limit UE implementation or test system implementation

Table 17.4.1.1.5-4: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_e
2	240	120	3.75*64*T_c
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6]			

Table 17.4.1.1.5-5: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (KHz)	The Maximum timing change in one adjustment T_q	The Minimum aggregate adjustment rate T_p	The Maximum aggregate adjustment rate T_q
2	120	3.125*64*T_c	-1.225*64*T_c	+3.725*64*T_c
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]				

17.4.2 UE timer accuracy for RedCap

17.4.3 Timing advance for RedCap

17.4.3.0 Minimum conformance requirements

17.4.3.0.1 Minimum conformance requirements for timing advance adjustment accuracy

The minimum requirements given in clause 7.4.3.0.1 shall apply.

17.4.3.1 NR SA FR2 timing advance adjustment accuracy for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz.
- UE PC3.
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

17.4.3.1.1 Test purpose

To verify UE timing advance adjustment delay and accuracy requirement defined in TS 38.133 clause 7.3A.

17.4.3.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from release 17 onward and supporting FR2.

17.4.3.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.4.3.0.1.

The normative reference for this requirement is TS.38.133 [6] clause A.17.4.3.1.

17.4.3.1.4 Test description

17.4.3.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.4.3.1.4.1 with following exceptions:

- Table 7.4.3.1.4.1-1 is replaced by Table 17.4.3.1.4.1-1;
- Table 7.4.3.1.4.1-2 is replaced by Table 17.4.3.1.4.1-2;
- Table 7.4.3.1.4.1-3 is replaced by Table 17.4.3.1.4.1-3.

Table 17.4.3.1.4.1-1: Supported test configurations

Config	Description
17.4.3.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table 17.4.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.4.3.1.4.1-1		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.4.3.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.8.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.8.1-2
Initial UL BWP		ULBWP.0.1	As specified in Table A.8.2-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.8.2-2
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 120 kHz SCS $N_{TA_new} = N_{TA_old} + 1024*T_c$ (based on equation in TS 38.213 [3] clause 4.2)
T1	s	5	
T2	s	5	

17.4.3.1.4.2 Test Procedure

Same as the test procedure given in clause 7.4.3.1.4.2.

17.4.3.1.4.3 Message Contents

Same as the message contents given in clause 7.4.3.1.4.3 with following exceptions:

- Table 7.3.1-3a is used with associated condition SSB.1 FR2.

17.4.3.1.5 Test Requirement

Same as the test requirement given in 7.4.3.1.5 with following exceptions:

- Table 7.4.3.1.5-1 is replaced by Table 17.4.3.1.5-1;
- Table 7.4.3.1.5-1a is replaced by Table 17.4.3.1.5-2;
- Table 7.4.3.1.5-2 is replaced by Table 17.4.3.1.5-3;
- Table 7.4.3.1.5-3 is replaced by Table 17.4.3.1.5-4.

Table 17.4.3.1.5-1: Cell specific test parameters

Parameter	Unit	Test1	
		T1	T2
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
BWP BW	MHz	100: $N_{RB,c}$ = 66	
DRx Cycle	ms	Not Applicable	
PDSCH Reference measurement channel		SR.3.1 TDD	
CORESET Reference Channel		CR.3.1 TDD	
OCNG Patterns		OP.1	
TRS configuration		TRS.2.1 TDD	
PDSCH/PDCCH TCI state		TCI.State.2	
SMTC configuration		SMTC.1	
SSB Configuration		SSB.1 FR2	
PDSCH/PDCCH subcarrier spacing	kHz	120	
PUCCH/PUSCH subcarrier spacing	kHz	120	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone

Table 17.4.3.1.5-2: OTA specific test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 as defined in A.9	
Assumption for UE beams Note 6		Fine	
N_{oc} Note1	dBm/15kHz Note4	-112	
N_{oc} Note1	dBm/SCS Note3	-103	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRP Note2	dBm/SCS Note4	-99	
$\hat{E}_s / I_{ot}$	dB	4	
Io Note2	dBm/95.04 MHz Note4	-68.5	

NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
NOTE 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
NOTE 5: As observed with 0dBi gain antenna at the centre of the quiet zone
NOTE 6: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 17.4.3.1.5-3: Sounding Reference Symbol Configuration

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
NOTE: For further information see clause 6.3.2 in TS 38.331 [13].		

Table 17.4.3.1.5-4: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	120
UE Timing Advance adjustment accuracy	±72 T_c

17.5 Signalling characteristics for RedCap

17.5.1 Radio link monitoring for RedCap

17.5.1.0 Minimum requirements

17.5.1.0.1 General

The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell as specified in TS 38.213 [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP. The SSB and SMTC in this section applies for both CD-SSB and NCD-SSB if it is not additional specified.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell.

The threshold Q_{out} is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out}$) as defined in Table 17.5.1.0.1-1. For SSB based radio link monitoring, $Q_{out_SSB,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table

17.5.1.0.1-2. For CSI-RS based radio link monitoring, $Q_{out_CSI\text{-}RS,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 17.5.1.0.1-4.

The threshold Q_{in} is defined as the level at which the downlink radio link quality can be significantly more reliably received than at Q_{out} and shall correspond to the in-sync block error rate ($BLER_{in}$) as defined in Table 17.5.1.0.1-1. For SSB based radio link monitoring, $Q_{in_SSB,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 17.5.1.0.1-3. For CSI-RS based radio link monitoring, $Q_{in_CSI\text{-}RS,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 17.5.1.0.1-5.

The out-of-sync block error rate ($BLER_{out}$) and in-sync block error rate ($BLER_{in}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *RLM-IS-OOS-thresholdConfig* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 17.5.1.0.1-1 as default. All requirements here are applicable for BLER Configuration #0 in Table 17.5.1.0.1-1.

Table 17.5.1.0.1-1: Out-of-sync and in-sync block error rates

Configuration	$BLER_{out}$	$BLER_{in}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [3], where N_{RLM} is specified in Table 17.5.1.0.1-6 according TS 38.213 [3], and meet the requirements as specified in 38.133 [6] clause 8.1B. UE is not required to meet the requirements in 38.133 [6] clause 8.1B if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 17.5.1.0.1-2: PDCCH transmission parameters for out-of-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16; for RedCap UE with 1Rx branch. 8; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4dB
Bandwidth (PRBs)	48; for RedCap UE with 1Rx branch. 24; for RedCap UE with 2Rx branches.
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 17.5.1.0.1-3: PDCCH transmission parameters for in-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8; for RedCap UE with 1Rx branch. 4; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB

Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	48; for RedCap UE with 1Rx branch. 24; for RedCap UE with 2Rx branches.
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 17.5.1.0.1-4: PDCCH transmission parameters for out-of-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16; for RedCap UE with 1Rx branch. 8; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	4dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 17.5.1.0.1-5: PDCCH transmission parameters for in-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8; for RedCap UE with 1Rx branch. 4; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 17.5.1.0.1-6: Maximum number of RLM-RS resources X_{RLM-RS}

Carrier frequency range of PCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1, ≤ 3 GHz[Note]	4	2
FR1, > 3 GHz[Note]	8	4

FR2	64	8
NOTE: For unpaired spectrum operation with Case C - 30 kHz SCS, 3GHz is replaced by 1.88GHz, as specified in clause 4.1 in TS 38.213 [3].		

When the UE transitions between RLM CD-SSB resource and RLM NCD-SSB resource during one evaluation period, the UE is allowed to restart the ongoing evaluation using the second SSB type after BWP switching. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second SSB type for each RLM-RS resource.

The requirements in 38.133 [6] clause 8.1.4 shall also apply except the scenarios described above.

The requirements in 38.133 [6] clause 8.1.5 shall apply.

When the downlink radio link quality on all the configured RLM-RS resources is worse than Q_{out}, Layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A Layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [13].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than $Q_{in,RedCap}$, layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [8]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval,RedCap}$.

When DRX is not used for RedCap UEs, $T_{Indication_interval,RedCap}$ is max(10ms, $T_{RLM\text{-}RS,M}$), where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 38.133 [6] 8.1B.2 if the RLM-RS resource is SSB, or $T_{CSI\text{-}RS}$ specified in 38.133 [6] clause 8.1B.3 if the RLM-RS resource is CSI-RS.

In case DRX is used for RedCap UEs, $T_{Indication_interval,RedCap}$ is max(10ms, 1.5 × DRX_cycle_length, 1.5 × $T_{RLM\text{-}RS,M}$)) if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

The following scheduling restriction applies due to radio link monitoring on an FR2 serving PCell.

- If the RLM-RS is CSI-RS which is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON,
  - There are no scheduling restrictions due to radio link monitoring based on the CSI-RS.
- Otherwise
  - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for RLM; and

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for RLM.

The normative reference for this requirement is TS 38.133 [6] clauses 8.1B.1, 8.1B.2, 8.1B.3, 8.1B.4, 8.1B.5, 8.1B.6 and 8.1B.7.

17.5.1.0.2 Minimum conformance requirements for SSB-based RLM

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell, provided that the SSB configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in this clause.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB,RedCap}$ [ms] period becomes worse than the threshold $Q_{out_SSB,RedCap}$ within $T_{Evaluate_out_SSB,RedCap}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_SSB,RedCap}$ [ms] period becomes better than the threshold $Q_{in_SSB,RedCap}$ within $T_{Evaluate_in_SSB,RedCap}$ [ms] evaluation period.

$T_{Evaluate_out_SSB,RedCap}$ and $T_{Evaluate_in_SSB,RedCap}$ are defined in Table 17.5.1.0.2-1 and for FR2 with scaling factor N=8 for 2Rx RedCap.

Table 17.5.1.0.2-1: Evaluation period $T_{Evaluate_out_SSB,RedCap}$ and $T_{Evaluate_in_SSB,RedCap}$ for FR2 for 2Rx RedCap UE

Configuration	$T_{Evaluate_out_SSB,RedCap}$ (ms)	$T_{Evaluate_in_SSB,RedCap}$ (ms)
no DRX	Max(200, Ceil(10 × P × N) × T_{SSB})	Max(100, Ceil(5 × P × N) × T_{SSB})
DRX cycle≤320ms	Max(200, Ceil(15 × P × N) × Max(T_{DRX},T_{SSB}))	Max(100, Ceil(7.5 × P × N) × Max(T_{DRX},T_{SSB}))
DRX cycle>320ms	Ceil(10 × P × N) × T_{DRX}	Ceil(5 × P × N) × T_{DRX}
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

For FR2,

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when RLM-RS resource is not overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).

- P is $P_{sharing\ factor}$, when the RLM-RS resource is not overlapped with measurement gap and RLM-RS resource is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq$ MGRP or

  - $T_{SMTCperiod}$ = MGRP and $T_{SSB} < 0.5*T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MGRP}}$, when the RLM-RS is partially overlapped with measurement gap and the RLM-RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod}$ = MGRP and $T_{SSB} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{SSB}}{MRGP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} <$ MGRP)

- $P_{sharing\ factor}$ = 1, if the RLM-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB

symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

- not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

If the high layer in TS 38.331 [13] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; otherwise $T_{SMTCperiod}$ follows *smtc1*.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

Longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Longer evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

For FR2, when the SSB for RLM measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

The normative reference for this requirement is TS 38.133 [6] clauses 8.1B.2.

17.5.1.0.3 Minimum conformance requirements for CSI-RS based RLM

The requirements in this clause apply for each CSI-RS based RLM-RS resource configured for PCell, provided that the CSI-RS configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in this clause. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI\text{-}RS,RedCap}$ ms period becomes worse than the threshold $Q_{out_CSI\text{-}RS,RedCap}$ within $T_{Evaluate_out_CSI\text{-}RS,RedCap}$ ms evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_CSI\text{-}RS,RedCap}$ ms period becomes better than the threshold $Q_{in_CSI\text{-}RS,RedCap}$ within $T_{Evaluate_in_CSI\text{-}RS,RedCap}$ ms evaluation period.

$T_{Evaluate_out_CSI\text{-}RS,RedCap}$ and $T_{Evaluate_in_CSI\text{-}RS,RedCap}$ are defined in Table 17.5.1.0.3-1 for FR2 with scaling factor N=1 for 2 Rx RedCap.

Table 17.5.1.0.3-1: Evaluation period $T_{Evaluate_out_CSI\text{-}RS,RedCap}$ and $T_{Evaluate_in_CSI\text{-}RS,RedCap}$ for FR2 for 2Rx RedCap UE

Configuration	$T_{Evaluate_out_CSI\text{-}RS,RedCap}$ (ms)	$T_{Evaluate_in_CSI\text{-}RS,RedCap}$ (ms)
no DRX	$Max(200, Ceil(M_{out,RedCap} \times P \times N) \times T_{CSI\text{-}RS})$	$Max(100, Ceil(M_{in,RedCap} \times P \times N) \times T_{CSI\text{-}RS})$
DRX ≤ 320ms	$Max(200, Ceil(1.5 \times M_{out,RedCap} \times P \times N) \times Max(T_{DRX}, T_{CSI\text{-}RS}))$	$Max(100, Ceil(1.5 \times M_{in,RedCap} \times P \times N) \times Max(T_{DRX}, T_{CSI\text{-}RS}))$
DRX > 320ms	$Ceil(M_{out,RedCap} \times P \times N) \times T_{DRX}$	$Ceil(M_{in,RedCap} \times P \times N) \times T_{DRX}$
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{CSI\text{-}RS}$ equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

For FR2,

- P=1, when the RLM-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is not overlapped with SMTC occasion ($T_{CSI-RS} < MGRP$)

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is not overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).

- $P = P_{sharing\ factor}$, when the RLM-RS resource is not overlapped with measurement gap and RLM-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and

  - $T_{SMTCperiod} \neq MGRP$ or

  - $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} < 0.5 \times T_{SMTCperiod}$

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{CSI-RS} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap

- $P = \frac{P_{sharing\ factor}}{1-\frac{T_{CSI-RS}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)

- $P_{sharing\ factor} = 1$, if the RLM-RS resource outside measurement gap is

  - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

  - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{sharing\ factor} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

If the high layer in TS 38.331 [2] signalling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Note: The overlap between CSI-RS for RLM and SMTC means that CSI-RS based RLM is within the SMTC window duration.

The values of $M_{out,RedCap}$ and $M_{in,RedCap}$ used in Table 17.5.1.0.3-1 for UE with 2Rx are defined as:

- $M_{out,RedCap}$ = 20 and $M_{in,RedCap}$ = 10, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* set to 3 and over the bandwidth $\geqslant$ 24 PRBs.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

Longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Longer evaluation period would be expected during the period $T_{identify_CGI,E\text{-}UTRAN}$ when the UE is requested to decode an LTE CGI.

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, or L1-RSRP measurement, or in the same symbol as SSB for CBD when beam failure is detected, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR2, when the CSI-RS for RLM measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- In the following cases, UE is required to measure one of but not both CSI-RS for RLM and the other CSI-RS. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.
  - The CSI-RS for RLM or the other CSI-RS in a resource set configured with repetition ON, or
  - The other CSI-RS is configured in q1 and beam failure is detected, or
  - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for RLM without any restriction.

The normative reference for this requirement is TS 38.133 [6] clauses 8.1B.3.

17.5.1.1 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

The test is incomplete for UE power classes other than PC3 (e.g. PC7)

The test is incomplete for test frequencies > 40.8 GHz

The test is incomplete for extreme conditions

17.5.1.1.1 Test purpose

To verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in 38.133[6] clause 8.1B.

17.5.1.1.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.5.1.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.1.1.

17.5.1.1.4 Test description

Same as the test description given in clause 7.5.1.1.4.

17.5.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.1.1.4.1 with following exceptions:

- Table 7.5.1.1.4.1-1 is replaced by Table 17.5.1.1.4.1-1.
- Table 7.5.1.1.4.1-2 is replaced by Table 17.5.1.1.4.1-2.
- Table 7.5.1.1.4.1-3 is replaced by Table 17.5.1.1.4.1-3.

Table 17.5.1.1.4.1-1: Supported test configurations

Configuration	Description
17.5.1.1-1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table 17.5.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

Table 17.5.1.1.4.1-3: General test parameters

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1		24
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD

Dedicated CORESET Reference Channel		Config 1		CCR.3.4 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		PRACH.4 FR2
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.5
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				*gp0*
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1		TRS.2.1 TDD
T1			s	0.2
T2			s	9.68
T3			s	9.68
D1			s	9.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

17.5.1.1.4.2 Test Procedure

Same as the test procedure given in clause 7.5.1.1.4.2.

17.5.1.1.4.3 Message Contents

Same as the message contents given in clause 7.5.1.1.4.3.

Message contents are according to TS 38.508-1 [14] clause 7.3.

17.5.1.1.5 Test Requirement

Same as the test requirements given in clause 7.5.1.1.5 with following exceptions:

- Table 7.5.1.1.5-1 is replaced by Table 17.5.1.1.5-1.

Table 17.5.1.1.5-1: Cell specific test parameters

Parameter	Unit	Test 1					
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3					
		AoA1			AoA2		
Assumption for UE beams Note 5		Rough			Rough		

EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1	dB	4.1 Note 6,7	-3.9 Note 6,7	-15			
ssb-Index 1 SNR	Config 1		Not sent			4.1 Note 6,7	-15	-15
N_{oc}	Config 1	dBm/ 15kHz	-94.8 Note 7			-94.8 Note 7		
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure 7.5.1.1.4-2					
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband
Note 7: Including test tolerance given in Annex F

17.5.1.2 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

The test is incomplete for UE power classes other than PC3 (e.g. PC7)

The test is incomplete for test frequencies > 40.8 GHz

The test is incomplete for extreme conditions

17.5.1.2.1 Test purpose

To verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in 38.133[6] clause 8.1B.

17.5.1.2.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.5.1.2.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.1.2.

17.5.1.2.4 Test description

Same as the test description given in clause 7.5.1.2.4.

17.5.1.2.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.1.2.4.1 with following exceptions:

- Table 7.5.1.2.4.1-1 is replaced by Table 17.5.1.2.4.1-1.
- Table 7.5.1.2.4.1-2 is replaced by Table 17.5.1.2.4.1-2.
- Table 7.5.1.2.4.1-3 is replaced by Table 17.5.1.2.4.1-3.

Table 17.5.1.2.4.1-1: Supported test configurations

Configuration	Description
17.5.1.2-1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table 17.5.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

Table 17.5.1.2.4.1-3: General test parameters

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		TDD
$BW_{channel}$		Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated		Config 1		24
DL initial BWP configuration		Config 1		DLBWP.0.1
DL dedicated BWP configuration		Config 1		DLBWP.1.1
UL initial BWP configuration		Config 1		ULBWP.0.1
UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.1 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.3
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		PRACH.4 FR2
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.5
CP length				Normal
In sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	4

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.88
T4		s	0.2
T5		s	3.84
D1		s	3.8
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

17.5.1.2.4.2 Test Procedure

Same as the test procedure given in clause 7.5.1.2.4.2.

17.5.1.2.4.3 Message Contents

Same as the message contents given in clause 7.5.1.2.4.3.

Message contents are according to TS 38.508-1 [14] clause 7.3.

17.5.1.2.5 Test Requirement

Same as the test requirements given in clause 7.5.1.2.5 with following exceptions:

- Table 7.5.1.2.5-1 is replaced by Table 17.5.1.2.5-1.

Table 17.5.1.2.5-1: Cell specific test parameters

Parameter	Unit	Test 1									
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup		Setup 3 defined in A.9									
		AoA1					AoA2				
Assumption for UE beams Note 5		Rough					Rough				

EPRE ratio of PDCCH DMRS to SSS		dB	0					Not sent						
EPRE ratio of PDCCH to PDCCH DMRS		dB												
EPRE ratio of PBCH DMRS to SSS		dB												
EPRE ratio of PBCH to PBCH DMRS		dB												
EPRE ratio of PSS to SSS		dB												
EPRE ratio of PDSCH DMRS to SSS		dB												
EPRE ratio of PDSCH to PDSCH DMRS		dB												
EPRE ratio of OCNG DMRS to SSS		dB												
EPRE ratio of OCNG to OCNG DMRS		dB												
ssb-Index 0 SNR	Config 1	dB	4.1 Note 6,7	-3.9 Note 6,7	-15	-15	-15	Not sent						
ssb-Index 1 SNR	Config 1		Not sent					4.1 Note 6,7	-15	-15	-4.5	4.1 Note 6,7		
N_{oc}	Config 1	dBm/ 15kHz	-94.8 Note 7					-94.8 Note 7						
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure 7.5.1.2.1-2											
Propagation condition			TDL-A 30ns 75Hz					TDL-A 30ns 75Hz						

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband
Note 7: Including test tolerance given in Annex F.

17.5.1.3 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

The test is incomplete for UE power classes other than PC3 (e.g. PC7)

The test is incomplete for test frequencies > 40.8 GHz

The test is incomplete for extreme conditions

17.5.1.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in 38.133[6] clause 8.1B.

17.5.1.3.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards and supporting long DRX cycle.

17.5.1.3.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.1.3.

17.5.1.3.4 Test description

Same as the test description given in clause 7.5.1.3.4.

17.5.1.3.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.1.3.4.1 with following exceptions:

- Table 7.5.1.3.4.1-1 is replaced by Table 17.5.1.3.4.1-1.
- Table 7.5.1.3.4.1-2 is replaced by Table 17.5.1.3.4.1-2.
- Table 7.5.1.3.4.1-3 is replaced by Table 17.5.1.3.4.1-3.

Table 17.5.1.3.4.1-1: Supported test configurations for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

Configuration	Description
17.5.1.3-1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table 17.5.1.3.4.1-2: Initial conditions for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.1.3.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

Table 17.5.1.3.4.1-3: General test parameters for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1		24
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1

UL dedicated BWP configuration		Config 1		ULBWP.1.1
TDD Configuration		Config 1		TDDConf.3.1
RMSI CORESET Reference Channel		Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.3.4 TDD
SSB Configuration		Config 1		SSB.1 FR2
SMTC Configuration		Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1		120 KHz
PRACH Configuration		Config 1		PRACH.1 FR2
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.5
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1		TRS.2.1 TDD
T1			s	0.2
T2			s	14.48
T3			s	14.48
D1			s	14.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

17.5.1.3.4.2 Test Procedure

Same as the test procedure given in clause 7.5.1.3.4.2.

17.5.1.3.4.3 Message Contents

Same as the message contents given in clause 7.5.1.3.4.3.

Message contents are according to TS 38.508-1 [14] clause 7.3.

17.5.1.3.5 Test Requirement

Same as the test requirements given in clause 7.5.1.3.5 with following exceptions:

- Table 7.5.1.3.5-1 is replaced by Table 17.5.1.3.5-1.

Table 17.5.1.3.5-1: Cell specific test parameters for NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.9					
			AoA1			AoA2		
Assumption for UE beams Note 5			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1	dB	4.1 Note 6	-3.9 Note 6	-15			
ssb-Index 1 SNR	Config 1		Not sent			4.1 Note 6	-15	-15
N_{oc}	Config 1	dBm/ 15kHz	-94.8			-94.8		
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure 17.5.1.3.1-2					
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 5: Information about types of UE beam is given in 38.133 [6] section B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband

17.5.1.4 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

The test is incomplete for UE power classes other than PC3 (e.g. PC7)

The test is incomplete for test frequencies > 40.8 GHz

The test is incomplete for extreme conditions

17.5.1.4.1 Test purpose

To verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in 38.133[6] clause 8.1B.

17.5.1.4.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards and supporting long DRX cycle.

17.5.1.4.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.1.4.

17.5.1.4.4 Test description

Same as the test description given in clause 7.5.1.4.4.

17.5.1.4.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.1.4.4.1 with following exceptions:

- Table 7.5.1.4.4.1-1 is replaced by Table 17.5.1.4.4.1-1.
- Table 7.5.1.4.4.1-2 is replaced by Table 17.5.1.4.4.1-2.
- Table 7.5.1.4.4.1-3 is replaced by Table 17.5.1.4.4.1-3.

Table 17.5.1.4.4.1-1: Supported test configurations

Configuration	Description
17.5.1.4-1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table 17.5.1.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.1.4.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

Table 17.5.1.4.4.1-3: General test parameters

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
$BW_{channel}$	Config 1		100: $N_{RB,c}$ = 66
Data RBs allocated	Config 1		66
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.3
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
PRACH Configuration	Config 1		PRACH.4 FR2
SSB index assigned as RLM RS	Config 1		0,1
OCNG parameters			OP.1

CP length			Normal
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.11
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	2.8
T4		s	0.2
T5		s	3.88
D1		s	3.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

17.5.1.4.4.2 Test Procedure

Same as the test procedure given in clause 7.5.1.4.4.2.

17.5.1.4.4.3 Message Contents

Same as the message contents given in clause 7.5.1.4.4.3.

Message contents are according to TS 38.508-1 [14] clause 7.3.

17.5.1.4.5 Test Requirement

Same as the test requirements given in clause 7.5.1.4.5 with following exceptions:

- Table 7.5.1.4.5-1 is replaced by Table 17.5.1.4.5-1.

Table 17.5.1.4.5-1: Cell specific test parameters

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1				
Assumption for UE beams Note 5		Rough				

EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
ssb-Index 0 SNR	Config 1	dB	3.3 Note 6,7	-4.7 Note 6,7	-15.4 Note 7	-4.9 Note 7	3.3 Note 6,7
ssb-Index 1 SNR	Config 1		3.3 Note 6,7	-15.4 Note 7	-15.4 Note 7	-15.4 Note 7	-15.4 Note 7
N_{oc}	Config 1	dBm/15KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.3
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband.
Note 7: Including the test tolerance given in Annex F.

17.5.1.5 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE

Editor's Note: This test case is incomplete due to the following:

- Usage of 2 antenna ports in CSI-RS 3.1 TDD implies SS transmitting signal on both polarizations. Potential signal imbalance impact to the test verdict is under investigation

- Test Tolerances are available for the following configurations:

  - Test frequency f ≤ 40.8 GHz

  - UE PC3

  - The Test Tolerances are incomplete for UE power classes other than PC3

  - The Test Tolerances are incomplete for test frequencies > 40.8 GHz

17.5.1.5.1 Test purpose

To verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1B.3.

17.5.1.5.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting FR2 and CSI-RS based RLM.

17.5.1.5.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.1.5.

17.5.1.5.4 Test description

Same as the test description given in clause 7.5.1.5.4.

17.5.1.5.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.1.5.4.1 with following exceptions:

- Table 7.5.1.5.4.1-1 is replaced by Table 17.5.1.5.4.1-1,
- Table 7.5.1.5.4.1-2 is replaced by Table 17.5.1.5.4.1-2,
- Table 7.5.1.5.4.1-3 is replaced by Table 17.5.1.5.4.1-3

Table 17.5.1.5.4.1-1: Supported test configurations

Configuration	Description
17.5.1.5-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table 17.5.1.5.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.15-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.1.5.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.5.1.5.4.1-3: General test parameters

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode			TDD
$BW_{channel}$			100: $N_{RB,c}$ = 66
Data RBs allocated			24
$BW_{occupied}$			24
TDD Configuration			TDDConf.3.1
DL initial BWP configuration			DLBWP.0.1
DL dedicated BWP configuration			DLBWP.1.4
UL initial BWP configuration			ULBWP.0.1
UL dedicated BWP configuration			ULBWP.1.4
RMSI CORESET Reference Channel			CR.3.1 TDD
Dedicated CORESET Reference Channel			CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	120
CSI-RS for RLM			Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
	DCI format		1-0
	Number of Control OFDM symbols		2

Out of sync transmission parameters	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting			CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.35
T3		s	0.35
D1		s	0.31
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

17.5.1.5.4.2 Test Procedure

Same as the test procedure given in clause 7.5.1.5.4.2.

17.5.1.5.4.3 Message Contents

Same as the message contents given in clause 7.5.1.5.4.3.

17.5.1.5.5 Test Requirement

Same as the test requirements given in clause 7.5.1.5.5 with following exceptions:

- Table 7.5.1.5.5-1 is replaced by Table 17.5.1.5.5-1,
- Table 7.5.1.5.5-2 is replaced by Table 17.5.1.5.5-2.

Table 17.5.1.5.5-1: Cell specific test parameters

Parameter	Unit	Test 1					
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.9.3					
		AoA1			AoA2		
Assumption for UE beams Note 10		Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS	dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0					
EPRE ratio of PBCH DMRS to SSS	dB						
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						
EPRE ratio of PDSCH to PDSCH DMRS	dB						
EPRE ratio of OCNG DMRS to SSS	dB						
EPRE ratio of OCNG to OCNG DMRS	dB						
SNR on RLM-RS1	dB	4.1 Note 11	-3.9 Note 11	-15	Not sent		
SNR on RLM-RS2	dB	Not sent			4.1 Note 11	-15	-15
N_{oc}	dBm/ 15kHz	-94.8					

Propagation condition		TDL-A 30ns 75Hz

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.1.5.4.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 10: Information about types of UE beam is given in 38.133 [6] section B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

17.5.1.6 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE

Editor's Note: This test case is incomplete due to the following:

- Procedure to ensure signal balancing in 2AoA setups is still FFS

- Signal levels and propagation conditions need further evaluation

- Usage of 2 antenna ports in CSI-RS 3.1 TDD implies SS transmitting signal on both polarizations. Potential signal imbalance impact to the test verdict is under investigation

- Test Tolerances are available for the following configurations:

  - Test frequency f ≤ 40.8 GHz

  - UE PC3

  - The Test Tolerances are incomplete for UE power classes other than PC3

  - The Test Tolerances are incomplete for test frequencies > 40.8 GHz

17.5.1.6.1 Test purpose

To verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1B.3.

17.5.1.6.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting FR2 and CSI-RS based RLM.

17.5.1.6.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.5.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.1.6.

17.5.1.6.4 Test description

Same as the test description given in clause 7.5.1.6.4.

17.5.1.6.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.1.6.4.1 with following exceptions:

- Table 7.5.1.6.4.1-1 is replaced by Table 17.5.1.6.4.1-1,
- Table 7.5.1.6.4.1-2 is replaced by Table 17.5.1.6.4.1-2,
- Table 7.5.1.6.4.1-3 is replaced by Table 17.5.1.6.4.1-3.

Table 17.5.1.6.4.1-1: Supported test configurations

Configuration	Description
17.5.1.6-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table 17.5.1.6.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.15-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.1.6.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.5.1.6.4.1-3: General test parameters

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode			TDD
$BW_{channel}$			100: $N_{RB,c}$ = 66
Data RBs allocated			24
$BW_{occupied}$			24
TDD Configuration			TDDConf.3.1
DL initial BWP configuration			DLBWP.0.1
DL dedicated BWP configuration			DLBWP.1.4
UL initial BWP configuration			ULBWP.0.1
UL dedicated BWP configuration			ULBWP.1.4
RMSI CORESET Reference Channel			CR.3.1 TDD
Dedicated CORESET Reference Channel			CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
PDSCH/PDCCH subcarrier spacing			120 KHz
CSI-RS for RLM			Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

17.5.1.6.4.2 Test Procedure

Same as the test procedure given in clause 7.5.1.6.4.2.

17.5.1.6.4.3 Message Contents

Same as the message contents given in clause 7.5.1.6.4.3.

17.5.1.6.5 Test Requirement

Same as the test requirements given in clause 17.5.1.6.5 with following exceptions:

- Table 7.5.1.6.5-1 is replaced by Table 17.5.1.6.5-1.

Table 17.5.1.6.5-1: Cell specific test parameters

Parameter	Unit	Test 1									
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup		Setup 3 defined in A.9.3									
		AoA1					AoA2				
Assumption for UE beams Note 10		Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	4					Not sent				

EPRE ratio of PDCCH to PDCCH DMRS	dB	0								
EPRE ratio of PBCH DMRS to SSS	dB									
EPRE ratio of PBCH to PBCH DMRS	dB									
EPRE ratio of PSS to SSS	dB									
EPRE ratio of PDSCH DMRS to SSS	dB									
EPRE ratio of PDSCH to PDSCH DMRS	dB									
EPRE ratio of OCNG DMRS to SSS	dB									
EPRE ratio of OCNG to OCNG DMRS	dB									
SNR on RLM-RS1	dB	4.1 Note 11	-3.9 Note 11	-15	-15	-15				
SNR on RLM-RS2	dB	Not sent					4.1 Note 11	-15	-15	-4.5	4.1 Note 11
N_{oc}	dBm/ 15KHz	-94.8								
Propagation condition		TDL-A 30ns 75Hz								

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting is assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 17.5.1.6.4.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 10: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

17.5.1.7 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

17.5.1.7.1 Test purpose

To verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1B.3.

17.5.1.7.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting FR2, CSI-RS based RLM and long DRX cycle.

17.5.1.7.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.5.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.1.7.

17.5.1.7.4 Test description

Same as the test description given in clause 7.5.1.7.4.

17.5.1.7.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.1.7.4.1 with following exceptions:

- Table 7.5.1.7.4.1-1 is replaced by Table 17.5.1.7.4.1-1,
- Table 7.5.1.7.4.1-2 is replaced by Table 17.5.1.7.4.1-2,
- Table 7.5.1.7.4.1-3 is replaced by Table 17.5.1.7.4.1-3

Table 17.5.1.7.4.1-1: Supported test configurations

Configuration	Description
17.5.1.7-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table 17.5.1.7.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.15-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.1.7.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.5.1.7.4.1-3: General test parameters

Parameter	Unit	Value
		Test 1
Active PCell		Cell 1
RF Channel Number		1
Duplex mode		TDD
$BW_{channel}$		100: $N_{RB,c}$ = 66
Data RBs allocated		24
$BW_{occupied}$		24
TDD Configuration		TDDConf.3.1
DL initial BWP configuration		DLBWP.0.1
DL dedicated BWP configuration		DLBWP.1.1
UL initial BWP configuration		ULBWP.0.1
UL dedicated BWP configuration		ULBWP.1.1
RMSI CORESET Reference Channel		CR.3.1 TDD
Dedicated CORESET Reference Channel		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	120
CSI-RS for RLM		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration		TRS.2.1 TDD TRS.2.2 TDD

TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting			CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

17.5.1.7.4.2 Test Procedure

Same as the test procedure given in clause 7.5.1.7.4.2.

17.5.1.7.4.3 Message Contents

Same as the message contents given in clause 7.5.1.7.4.3.

17.5.1.7.5 Test Requirement

Same as the test requirements given in clause 7.5.1.7.5 with following exceptions:

- Table 7.5.1.7.5-1 is replaced by Table 17.5.1.7.5-1,
- Table 7.5.1.7.5-2 is replaced by Table 17.5.1.7.5-2.

Table 17.5.1.7.5-1: Cell specific test parameters

Parameter	Unit	Test 1		
		T1	T2	T3
AoA setup	dB	Setup 1 defined in A.3.15		
Assumption for UE beams Note 10		Rough		
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB			
EPRE ratio of PBCH DMRS to SSS	dB	0		
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PSS to SSS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			
EPRE ratio of OCNG DMRS to SSS	dB			
EPRE ratio of OCNG to OCNG DMRS	dB			

SNR on RLM-RS1	dB	3.3[Note 11]	-4.7[Note 11]	-15.4
SNR on RLM-RS2	dB	3.3[Note 11]	-15.4	-15.4
N_{oc}	dBm/15KHz	-104.7		
Propagation condition		TDL-A 30ns 75Hz		

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.1.7.1-1.
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 10: Information about types of UE beam is given in TS 38.133 [6] B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

17.5.1.8 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

17.5.1.8.1 Test purpose

To verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1B.3.

17.5.1.8.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting FR2, CSI-RS based RLM and long DRX cycle.

17.5.1.8.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.5.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.1.8.

17.5.1.8.4 Test description

Same as the test description given in clause 7.5.1.8.4.

17.5.1.8.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.1.8.4.1 with following exceptions:

- Table 7.5.1.8.4.1-1 is replaced by Table 17.5.1.8.4.1-1,

- Table 7.5.1.8.4.1-2 is replaced by Table 17.5.1.8.4.1-2,

- Table 7.5.1.8.4.1-3 is replaced by Table 17.5.1.8.4.1-3.

Table 17.5.1.8.4.1-1: Supported test configurations

Configuration	Description
17.5.1.8-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table 17.5.1.8.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.15-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.1.8.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.5.1.8.4.1-3: General test parameters

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode			TDD
TDD Configuration			TDDConf.3.1
DL initial BWP configuration			DLBWP.0.1
DL dedicated BWP configuration			DLBWP.1.1
UL initial BWP configuration			ULBWP.0.1
UL dedicated BWP configuration			ULBWP.1.1
RMSI CORESET Reference Channel			CR.3.1 TDD
Dedicated CORESET Reference Channel			CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	120
CSI-RS for RLM			Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0
Layer 3 filtering			*Enabled*
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	1.64
T4		s	0.2
T5		s	1.88
D1		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

17.5.1.8.4.2 Test Procedure

Same as the test procedure given in clause 7.5.1.8.4.2.

17.5.1.8.4.3 Message Contents

Same as the message contents given in clause 7.5.1.8.4.3.

17.5.1.8.5 Test Requirement

Same as the test requirements given in clause 17.5.1.8.5 with following exceptions:

- Table 7.5.1.8.5-1 is replaced by Table 17.5.1.8.5-1.

Table 17.5.1.8.5-1: Cell specific test parameters

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup	dB	Setup 1 defined in A.3.15				
Assumption for UE beams Note 10		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	4				
EPRE ratio of PDCCH to PDCCH DMRS	dB	0				
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					
SNR on RLM-RS1	dB	3.3 Note 11	-4.7 Note 11	-15.4	-4.9 Note 11	3.3 Note 11
SNR on RLM-RS2	dB	3.3 Note 11	-15.4	-15.4	-15.4	-15.4
N_{oc}	dBm/ 15KHz	-104.7				
Propagation condition		TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure 7.5.1.8.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band..
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband.

17.5.1.9 NR SA FR2 radio link monitoring UE scheduling restrictions for 2 Rx UE

Editor's note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions

The test is incomplete for UE power classes other than PC3

The test is incomplete for test frequencies > 40.8 GHz

17.5.1.9.1 Test purpose

To verify that the NR UE correctly follows the RLM scheduling restrictions requirements defined in 38.133 [6] clause 8.1B.7. This test verifies that the UE correctly receive the PDCCH scheduled on the symbols right before the RLM SSB symbols without overlap so that it sends ACK/NACK correctly.

17.5.1.9.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards supporting *pdcch-MonitoringAnyOccasions* or *pdcch-MonitoringAnyOccasionsWithSpanGap*.

17.5.1.9.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 17.5.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.1.9.

17.5.1.9.4 Test description

Same as the test description given in clause 7.5.1.9.4.

17.5.1.9.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.1.9.4.1 with following exceptions:

- Table 7.5.1.9.4.1-1 is replaced by Table 17.5.1.9.4.1-1.
- Table 7.5.1.9.4.1-2 is replaced by Table 17.5.1.9.4.1-2.
- Table 7.5.1.9.4.1-3 is replaced by Table 17.5.1.9.4.1-3.

Table 17.5.1.9.4.1-1: Supported test configurations

Configuration	Description
17.5.1.9-1	120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode

Table 17.5.1.9.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E.1.2, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.1.9.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

Table 17.5.1.9.4.1-3: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1	
SSB configuration		SSB.1 FR2	
SMTC configuration		SMTC.3	
DRX cycle length	s	OFF	
T1	s	5	During T1 the UE is required to correctly transmit ACK/NACK

17.5.1.9.4.2 Test Procedure

Same as the test procedure given in clause 7.5.1.9.4.2.

17.5.1.9.4.3 Message Contents

Same as the message contents given in clause 7.5.1.9.4.3.

17.5.1.9.5 Test Requirement

Same as the test requirements given in clause 7.5.1.9.5 with following exceptions:

- Table 7.5.1.9.5-1 is replaced by Table 17.5.1.9.5-1.

Table 17.5.1.9.5-1: Cell specific test parameters

Parameter	Unit	Cell 1	
AoA setup		Setup 3	
		AoA1	AoA2
Assumption for UE beams Note 1		Rough	Rough
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		24	
PDSCH Reference measurement channel		SR.3.2 TDD	Not sent
RMSI CORESET RMC configuration		CR.3.1 TDD	Not sent
Dedicated CORESET RMC configuration		CCR.3.2 TDD	Not sent
TRS configuration		TRS.2.1 TDD	TRS.2.2 TDD
PDCCH/PDSCH TCI state		TCI.State.2	N/A
OCNG Pattern		OP.5	Not sent
Initial DL BWP configuration		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1	

RLM-RS		SSB with index 0	SSB with index 1
N_{oc}	dBm/15kHz	-94.8	-94.8
N_{oc} Note2	dBm/SCS	-85.8	-85.8
$\hat{E}_s / N_{oc}$	dB	4.1	4.1
$\hat{E}_s / I_{ot}$ BB Note 4	dB	2.37	2.37
SSB_RP Note3	dBm/SCS	-81.7	-81.7
Io	dBm/95.04 MHz	-55.65	-55.65
Time multiplexing of the downlink transmissions from each AoA		Defined in Figure A.7.5.1.9.1-1	
Propagation Condition		AWGN	AWGN

Note 1: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

17.5.2 Beam Failure Detection and Link recovery procedures for RedCap

17.5.2.0 Minimum conformance requirements

17.5.2.0.1 Minimum conformance requirements for SSB-based BFD and link recovery procedures

The minimum requirements given in clause 5.5.5.0.1 applies.

The normative reference for this requirement is TS 38.133 [6] clause 8.5B.1, 8.5B.2, 8.5B.4, 8.5B.5 and 8.5B.9

17.5.2.0.2 Minimum conformance requirements for CSI-RS-based BFD and link recovery procedures

The minimum requirements given in clause 5.5.5.0.2 applies.

The normative reference for this requirement is TS 38.133 [6] clause 8.5B.1, 8.5B.3, 8.5B.4, 8.5B.6, 8.5B.9

17.5.2.0.3 Scheduling availability of UE during beam failure detection and candidate beam detection

The minimum requirements given in clause 5.5.5.0.3 applies.

The normative reference for this requirement is TS 38.133 [6] clause 8.5B.1, 8.5B.2, 8.5B.4, 8.5B.5, 8.5B.7, 8.5B.8 and 8.5B.9

17.5.2.1 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE

Editor's Note:

This test case is complete for the following configurations:

- UE PC3

- Test frequencies f ≤ 40.8 GHz;

This test case is incomplete for UE power classes other than PC3;

17.5.2.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5B.

17.5.2.1.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards.

17.5.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.2.1.

17.5.2.1.4 Test description

Same as the test description given in clause 7.5.5.1.4.

17.5.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.5.1.4.1 with following exceptions:

- Table 7.5.5.1.4.1-1 is replaced by Table 17.5.2.1.4.1-1.
- Table 7.5.5.1.4.1-2 is replaced by Table 17.5.2.1.4.1-2.
- Table 7.5.5.1.4.1-3 is replaced by Table 17.5.2.1.4.1-3.

Table 17.5.2.1.4.1-1: Supported test configurations for NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

Configuration	Description
17.5.2.1-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table 17.5.2.1.4.1-2: Initial conditions for NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.2.1.4.1-1.		
Propagation conditions	Multi-path fading		As specified in Annex C.2.3.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.5.2.1.4.1-3: General test parameters for NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1		Cell 1	
RF Channel Number		1		1	
Duplex mode		1		TDD	
TDD Configuration		1		TDDConf.3.1	
$BW_{channel}$		1		100: $N_{RB,c}$ = 66	
Data RBs allocated		1		66	
PDSCH/PDCCH subcarrier spacing		1	kHz	120	
DL initial BWP configuration		1		DLBWP.0.1	
DL dedicated BWP configuration		1		DLBWP.1.1	
UL initial BWP configuration		1		ULBWP.0.1	
UL dedicated BWP configuration		1		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
SMTC Configuration		1		SMTC.3	
PRACH Configuration		1		FR2 PRACH configuration 2	
DRX configuration		1		OFF	
SSB index assigned as BFD RS (q_0)		1		0	
SSB index assigned as CBD RS (q_1)		1		1	
SSB index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		gp0	
gapOffset		1	ms	0	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-109 Note 3	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1		CSI-RS.3.1 TDD	
reportConfigType		1		periodic	
reportQuantity		1		cri-RI-PMI-CQI	
CSI reporting periodicity		1	slot	40	
CSI reporting offset		1	slot	4	
T310		1	ms	1000	
N310		1		2	

T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	2.61	
T3	1	s	1.64	
T4	1	s	0	
T5	1	s	1.01	
D1	1	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: Including test tolerance given in Annex F.1.3.2.				

17.5.2.1.4.2 Test procedure

Same as the test procedure given in clause 7.5.5.1.4.2.

17.5.2.1.4.3 Message contents

Same as the message contents given in clause 7.5.5.1.4.3.

17.5.2.1.5 Test requirement

Same as the test requirements given in clause 7.5.5.1.5 with following exceptions:

- Table 7.5.5.1.5-1 is replaced by Table 17.5.2.1.5-1.

Table 17.5.2.1.5-1: NR Cell specific test parameters for NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.9				
Assumption for UE beams Note 10		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					
SNR_SSB of set q_0	dB	13.7 Note11,12	5.7 Note11,12	-12	-12	-12
SNR_SSB of set q_1	dB	0.2	0.2	20 Note12	20 Note12	20 Note12
SSB_RP of set q_1	dBm/SCS	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	dBm/120 KHz	-104.7				
Propagation condition		TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.1.4-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 10:	Information about types of UE beam is given in 38.133 [6] B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband
Note 12:	Including test tolerance given in Annex F.1.3.2.

17.5.2.2 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE

Editor's Note:

This test case is complete for the following configurations:

- UE PC3
- Test frequencies f ≤ 40.8 GHz;

This test case is incomplete for UE power classes other than PC3;

17.5.2.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5B.

17.5.2.2.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards supporting long DRX cycle.

17.5.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.2.2.

17.5.2.2.4 Test description

Same as the test description given in clause 7.5.5.2.4.

17.5.2.2.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.5.2.4.1 with following exceptions:

- Table 7.5.5.2.4.1-1 is replaced by Table 17.5.2.2.4.1-1.
- Table 7.5.5.2.4.1-2 is replaced by Table 17.5.2.2.4.1-2.
- Table 7.5.5.2.4.1-3 is replaced by Table 17.5.2.2.4.1-3.

Table 17.5.2.2.4.1-1: Supported test configurations for NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode

Configuration	Description
17.5.2.2-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table 17.5.2.2.4.1-2: Initial conditions for NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.2.2.4.1-1.		
Propagation conditions	Multi-path fading		As specified in Annex C.2.3.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.5.2.2.4.1-3: General test parameters for NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1		Cell 1	
RF Channel Number		1		1	
Duplex mode		1		TDD	
TDD Configuration		1		TDDConf.3.1	
$BW_{channel}$		1		100: $N_{RB,c}$ = 66	
Data RBs allocated		1		66	
PDSCH/PDCCH subcarrier spacing		1	kHz	120	
DL initial BWP configuration		1		DLBWP.0.1	
DL dedicated BWP configuration		1		DLBWP.1.1	
UL initial BWP configuration		1		ULBWP.0.1	
UL dedicated BWP configuration		1		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
SMTC Configuration		1		SMTC.3	
PRACH Configuration		1		PRACH.2 FR2	
DRX configuration		1		DRX.3	
SSB index assigned as BFD RS (q_0)		1		0	
SSB index assigned as CBD RS (q_1)		1		1	
SSB index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	

	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-109 Note 3	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1		n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer		1		pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting		1		CSI-RS.3.1 TDD	
reportConfigType		1		periodic	
reportQuantity		1		cri-RI-PMI-CQI	
CSI reporting periodicity		1	slot	40	
CSI reporting offset		1	slot	4	
T310		1	ms	1000	
N310		1		2	
T1		1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1	s	3.37	
T3		1	s	2.8	
T4		1	s	0	
T5		1	s	0.61	
D1		1	s	0.57	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts. Note 3: Including test tolerance given in Annex F.1.3.2.					

17.5.2.2.4.2 Test procedure

Same as the test procedure given in clause 7.5.5.2.4.2.

17.5.2.2.4.3 Message contents

Same as the message contents given in clause 7.5.5.2.4.3.

17.5.2.2.5 Test requirement

Same as the test requirements given in clause 7.5.5.2.5 with following exceptions:

- Table 7.5.5.2.5-1 is replaced by Table 17.5.2.2.5-1.

Table 17.5.2.2.5-1: NR Cell specific test parameters for NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.9				
Assumption for UE beams Note 9		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					

EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					
SNR_SSB of set q_0	dB	13.7 Note10,11	5.7 Note10,11	-12	-12	-12
SNR_SSB of set q_1	dB	0.2	0.2	20 Note11	20 Note11	20 Note11
SSB_RP of set q_1	dBm/SCS	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	dBm/120 KHz	-104.7				
Propagation condition		TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 5: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 6: SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 7: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.2.4-1.
Note 8: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 9: Information about types of UE beam is given in 38.133 [6] section B.2.1.3 and does not limit UE implementation or test system implementation.
Note 10: This value allows up to 1dB degradation from applied SNR to UE baseband.
Note 11: Including test tolerance given in Annex F.1.3.2.

17.5.2.3 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE

Editor's Note:

This test case is complete for the following configurations:

- UE PC3
- Test frequencies f ≤ 40.8 GHz;

This test case is incomplete for UE power classes other than PC3;

This test case is incomplete for test frequencies f > 40.8 GHz.17.5.2.3.1 Test purpose

To verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5B.

17.5.2.3.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards supporting CSI-RS-based RLM and link recovery.

17.5.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.2.3.

17.5.2.3.4 Test description

Same as the test description given in clause 7.5.5.3.4.

17.5.2.3.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.5.3.4.1 with following exceptions:

- Table 7.5.5.3.4.1-1 is replaced by Table 17.5.2.3.4.1-1.
- Table 7.5.5.3.4.1-2 is replaced by Table 17.5.2.3.4.1-2.
- Table 7.5.5.3.4.1-3 is replaced by Table 17.5.2.3.4.1-3.

Table 17.5.2.3.4.1-1: Supported test configurations

Configuration	Description
17.5.2.3-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table 17.5.2.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.2.3.4.1-1.		
Propagation conditions	Multi-path fading		As specified in Annex C.2.3.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.5.2.3.4.1-3: General test parameters

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode			TDD	
TDD Configuration			TDDConf.3.1	
$BW_{channel}$			100: $N_{RB,c}$ = 66	
Data RBs allocated			66	
PDSCH/PDCCH subcarrier spacing		kHz	120	
DL initial BWP configuration			DLBWP.0.1	
DL dedicated BWP configuration			DLBWP.1.1	
UL initial BWP configuration			ULBWP.0.1	
UL dedicated BWP configuration			ULBWP.1.1	
PDSCH Reference Channel			SR.3.2 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	
Dedicated CORESET Reference Channel			CCR.3.1 TDD	
OCNG parameters			OP.1	
CP length			Normal	
PDSCH/PDCCH TCI state			TCI.State.0	
CSI-RS for tracking			TRS.2.1 TDD	
SSB Configuration			SSB.1 FR2	
SMTC Configuration			SMTC.3	
PRACH Configuration			PRACH.4 FR2	A.3.8.3.4
DRX configuration			OFF	
CSI-RS configuration for BFD/CBD/RLM			CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)			0	
CSI-RS index assigned as CBD RS (q_1)			1	
CSI-RS index assigned as RLM RS			0,1	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	

	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
Gap pattern ID			N/A	
rlmInSyncOutOfSyncThreshold			absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		dBm/ SCS	-109	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting			CSI-RS.3.1 TDD	A.3.14.2
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity		slot	40	
CSI reporting offset		slot	4	
T310		ms	1000	
N310			2	
T1		s	1	The UE shall be fully synchronized to cell 1 during T1
T2		s	1.17	
T3		s	0.9	
T4		s	0	
T5		s	0.31	
D1		s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

17.5.2.3.4.2 Test procedure

Same as the test procedure given in clause 7.5.5.3.4.2.

17.5.2.3.4.3 Message contents

Same as the message contents given in clause 7.5.5.3.4.3.

17.5.2.3.5 Test requirement

Same as the test requirements given in clause 7.5.5.3.5 with following exceptions:

- Table 7.5.5.3.5-1 is replaced by Table 17.5.2.3.5-1.

Table 17.5.2.3.5-1: NR Cell specific test parameters

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.9				
Assumption for UE beams Note 9		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					

EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					
SNR_CSI-RS of set q_0	dB	13.7Note	5.7Note 10	-12	-12	-12
SNR_CSI-RS of set q_1	dB	0.2	0.2	20	20	20
CSI-RS_RP of set q_1	dBm/SCS	-104.5	-104.5	-84.7	-84.7	-84.7
N_{oc}	dBm/ 120 KHz	-104.7				
Propagation condition		TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 5: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 6: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 7: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.3.4-1.
Note 8: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 9: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 10: This value allows up to 1dB degradation from applied SNR to UE baseband.

17.5.2.4 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE

Editor's Note:

This test case is complete for the following configurations:

- UE PC3
- Test frequencies f ≤ 40.8 GHz;

This test case is incomplete for UE power classes other than PC3;

This test case is incomplete for test frequencies f > 40.8 GHz.17.5.2.4.1 Test purpose

To verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in TS 38.133 [6] clause 8.5B.

17.5.2.4.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards supporting CSI-RS-based RLM, long DRX cycle and link recovery.

17.5.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.2.4.

17.5.2.4.4 Test description

Same as the test description given in clause 7.5.5.4.4.

17.5.2.4.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.5.4.4.1 with following exceptions:

- Table 7.5.5.4.4.1-1 is replaced by Table 17.5.2.4.4.1-1.
- Table 7.5.5.4.4.1-2 is replaced by Table 17.5.2.4.4.1-2.
- Table 7.5.5.4.4.1-3 is replaced by Table 17.5.2.4.4.1-3.

Table 17.5.2.4.4.1-1: Supported test configurations

Configuration	Description
17.5.2.4-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table 17.5.2.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.2.4.4.1-1.		
Propagation conditions	Multi-path fading		As specified in Annex C.2.3.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.5.2.4.4.1-3: General test parameters

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode			TDD	
TDD Configuration			TDDConf.3.1	
$BW_{channel}$			100: $N_{RB,c}$ = 66	
Data RBs allocated			66	
PDSCH/PDCCH subcarrier spacing		kHz	120	
DL initial BWP configuration			DLBWP.0.1	
DL dedicated BWP configuration			DLBWP.1.1	
UL initial BWP configuration			ULBWP.0.1	
UL dedicated BWP configuration			ULBWP.1.1	
PDSCH Reference Channel			SR.3.2 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	
Dedicated CORESET Reference Channel			CCR.3.1 TDD	
OCNG parameters			OP.1	
CP length			Normal	
PDSCH/PDCCH TCI state			TCI.State.0	
CSI-RS for tracking			TRS.2.1 TDD	
SSB Configuration			SSB.1 FR2	
SMTC Configuration			SMTC.3	
PRACH Configuration			PRACH.4 FR2	A.3.8.3.4
DRX configuration			DRX.3	
CSI-RS configuration for BFD/CBD/RLM			CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)			0	
CSI-RS index assigned as CBD RS (q_1)			1	
CSI-RS index assigned as RLM RS			0,1	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	

	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
Gap pattern ID			N/A	
rlmInSyncOutOfSyncThreshold			absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		dBm/ SCS	-109	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting			CSI-RS.3.1 TDD	A.3.14.2
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity		slot	40	
CSI reporting offset		slot	4	
T310		ms	1000	
N310			2	
T1		s	1	The UE shall be fully synchronized to cell 1 during T1
T2		s	5.43	
T3		s	5.16	
T4		s	0	
T5		s	0.31	
D1		s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

17.5.2.4.4.2 Test procedure

Same as the test procedure given in clause 7.5.5.4.4.2.

17.5.2.4.4.3 Message contents

Same as the message contents given in clause 7.5.5.4.4.3.

17.5.2.4.5 Test requirement

Same as the test requirements given in clause 7.5.5.4.5 with following exceptions:

- Table 7.5.5.4.5-1 is replaced by Table 17.5.2.4.5-1.

Table 17.5.2.4.5-1: NR Cell specific test parameters

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.9				
Assumption for UE beams Note 9		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					

EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					
SNR_CSI-RS of set q_0	dB	13.7 Note 10	5.7 Note 10	-12	-12	-12
SNR_CSI-RS of set q_1	dB	0.2	0.2	20	20	20
CSI-RS_RP of set q_1	dBm/SCS	-104.5	-104.5	-84.7 5	-84.7	-84.7
N_{oc}	dBm/ 120 KHz	-104.7				
Propagation condition		TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 5: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 6: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 7: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.4.4-1.
Note 8: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 9: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 10: This value allows up to 1dB degradation from applied SNR to UE baseband.

17.5.2.5 NR SA FR2 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE

Editor's Note:

This test case is complete for the following configurations:

- UE PC3
- Test frequencies f ≤ 40.8 GHz;

This test case is incomplete for UE power classes other than PC3;

This test case is incomplete for test frequencies f > 40.8 GHz.

17.5.2.5.1 Test purpose

To test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used. This test will verify the scheduling availability restriction requirements in 38.133 [6] clause 8.5B.7 and 8.5B.8.

17.5.2.5.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards supporting link recovery.

17.5.2.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.2.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.2.5.

17.5.2.5.4 Test description

Same as the test description given in clause 7.5.5.5.4.

17.5.2.5.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.2.5.4.1 with following exceptions:

- Table 7.5.5.5.4.1-1 is replaced by Table 17.5.2.5.4.1-1.
- Table 7.5.5.5.4.1-2 is replaced by Table 17.5.2.5.4.1-2.
- Table 7.5.5.5.4.1-3 is replaced by Table 17.5.2.5.4.1-3.

Table 17.5.2.5.4.1-1: Supported test configurations

Configuration	Description
17.5.2.5-1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
17.5.2.5-2	TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth

Table 17.5.2.5.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.2.5.4.1-1.		
Propagation conditions	Multi-path fading		As specified in Annex C.2.3.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.5.2.5.4.1-3: General test parameters

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode			TDD	
TDD Configuration			TDDConf.3.1	Table A.1.5-3
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated			66	
PDSCH/PDCCH subcarrier spacing		kHz	120	
DL initial BWP configuration			DLBWP.0.1	Table A.8.1-1
DL dedicated BWP configuration			DLBWP.1.1	Table A.8.1-2
UL initial BWP configuration			ULBWP.0.1	Table A.8.2-1
UL dedicated BWP configuration			ULBWP.1.1	Table A.8.2-2
PDSCH Reference Channel	Config 1		SR.3.2 TDD	Table A.1.1.2-3
	Config 2		SR.3.3 TDD	
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	Table A.1.2.2-3
	Config 2		CR.3.2 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD	Table A.1.3.2-3
	Config 2		CCR.3.7 TDD	
OCNG parameters			OP.1	Table A.2.1-1
CP length			Normal	
PDSCH/PDCCH TCI state			TCI.State.0	Table A.10.2-1
CSI-RS for tracking			TRS.2.1 TDD	
SSB Configuration	Config 1		SSB.1 FR2	Table A.3.2-1
	Config 2		SSB.2 FR2	
SMTC Configuration			SMTC.1	Table A.4-1
PRACH Configuration			PRACH.2 FR2	Table A.7.2-1
DRX configuration			OFF	
SSB index assigned as BFD RS (q_0)			0	

SSB index assigned as CBD RS (q_1)				1	
Beam failure detection transmission parameters	DCI format			1-0	
	Number of Control OFDM symbols			2	
	Aggregation level		CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	0	
	DMRS precoder granularity			REG bundle size	
	REG bundle size			6	
Gap pattern ID				N/A	
rlmInSyncOutOfSyncThreshold				absent	Value 0 is applied. (TS 38.133 [6] Table 8.1.1-1).
rsrp-ThresholdSSB		Config 1	dBm/SCS	-109	Threshold used for $Q_{in_LR_SSB}$
		Config 2		-106	
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see TS 38.321 [12], clause 5.17
beamFailureDetectionTimer				pbfd4	see TS 38.321 [12], clause 5.17
CSI-RS configuration for CSI reporting				CSI-RS.3.1 TDD	Table A.1.4.2-3
reportConfigType				periodic	
reportQuantity				cri-RI-PMI-CQI	
CSI reporting periodicity			slot	40	
CSI reporting offset			slot	4	
T310			ms	1000	
N310				2	
T1			s	1	The UE shall be fully synchronized to cell 1 during T1
T2			s	2.6	
T3			s	1.64	
T4			s	0	
T5			s	1.01	
D1			s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1. Note 2: UE-specific PDCCH is not transmitted after T1 starts.					

17.5.2.5.4.2 Test procedure

Same as the test procedure given in clause 7.5.5.5.4.2.

17.5.2.5.4.3 Message contents

Same as the message contents given in clause 7.5.5.5.4.3.

17.5.2.5.5 Test requirement

Same as the test requirements given in clause 7.5.5.5.5 with following exceptions:

- Table 7.5.5.5.5-1 is replaced by Table 17.5.2.5.5-1.

Table 17.5.2.5.5-1: NR Cell specific test parameters

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.9				

Assumption for UE beams Note 9			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0		dB	13.7 Note 10	5.7 Note 10	-12	-12	-12
SNR_SSB of set q_1		dB	0.2	0.2	20	20	20
SSB_RP of set q_1	Config 1	dBm/ SCS	-104.5	-104.5	-84.7	-84.7	-84.7
	Config 2		-101.5	-101.5	-81.7	-81.7	-81.7
N_{oc}		dBm/ 120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 5: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 6: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 7: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure 7.5.5.5.4-1.
Note 8: The SNR values are specified for testing a UE which supports 2RX on at least one band.
Note 9: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 10: This value allows up to 1dB degradation from applied SNR to UE baseband.

17.5.3 Active BWP switch delay for RedCap

17.5.3.1 DCI-based and time-based active BWP switch for RedCap

17.5.3.1.0 Minimum conformance requirements for DCI-based and time-based active BWP switch

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with more than one BWP configurations configured.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ + Y which starts from the beginning of DL slot n. Where,

- Y=0, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n, where slot n is the first slot of a DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [2] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 17.5.3.1.0-1.

Table 17.5.3.1.0-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{BWPswitchDelay}$ (slots)	
		Type 1[Note 1]	Type 2[Note 1]
3	0.125	6	18
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in TS 38.133 [6] Clause 8.10 in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in TS 38.133 [6] Clause 8.10 in the new BWP.

The normative reference for this requirement is TS 38.133 [6] clauses 8.6A.2.

17.5.3.1.1 NR SA FR2 DCI-based and Timer-based DL active BWP switch for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

17.5.3.1.1.1 Test purpose

To verify the DL BWP switch delay requirement defined in clause 8.6A.

17.5.3.1.1.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards and supporting BWP adaptation of at least 2 BWPs, DCI and timer-based active BWP switching delay Type1 or Type2.

17.5.3.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.3.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.3.1.1.

17.5.3.1.1.4 Test description

17.5.3.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.5.3.1.1.4.1-1.

Table 17.5.3.1.1.4.1-1: Supported test configurations

Config	Description
17.5.3.1.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Configure the test equipment and the DUT according to the parameters in Table 17.5.3.1.1.4.1-2.

Table 17.5.3.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.3.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 17.5.3.1.1.4.1-3.
2. Message contents are defined in clause 17.5.3.1.1.4.3.
3. The test scenario comprises of one NR PCell (Cell 1). Cell 1 is configured according to Annex C.1.2 and C.1.3.

Table 17.5.3.1.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
bwp-InactivityTimer	ms	200	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

17.5.3.1.1.4.2 Test procedure

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

The Cell 1 has constant signal levels throughout the test.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.
2. Set the parameters according to Tables 17.5.3.1.1.4.1-3, 17.5.3.1.1.5-1 and 17.5.3.1.1.5-2.
3. The SS shall transmit an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures 2 different UE-specific bandwidth

parts, BWP-1 and BWP-2, which always include the bandwidth of the initial DL BWP and SSB. The SS indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*. UE is configured with a *bwp-InactivityTimer* timer value for Cell 1.

4. The SS sends a DCI format 1_1 to trigger Cell 1 DL BWP switch. T1 starts from the slot (denoted as slot #i) in which the UE receiving the DCI format 1_1.

5. If the UE,

   - starts to report valid ACK/NACK for Cell 1 on BWP-2 from the first UL slot that occurs after the beginning of DL slot ($i+T_{BWPswitchDelay}+k_1$),

   then count a success for the event "DCI-based", go to step 6. Otherwise count a fail for the event "DCI-based", switch off/on the UE and go to step 1.

6. T2 starts. During T2 the SS stops scheduling DL reception on Cell 1 to let timer *bwp-InactivityTimer* expire.

7. T3 starts from the first slot (denoted as slot #j) of the DL half-frame immediately after the timer *bwp-InactivityTimer* expires. During T3 the SS restarts scheduling DL reception on Cell 1.

8. If the UE,

   - starts to report valid ACK/NACK for Cell1 on BWP 1 from the first UL slot that occurs after the beginning of DL slot ($j+T_{BWPswitchDelay}+k_1$). The number of successful subtests is increased by one and go to step 8 after T3 expires. Otherwise, count a fail for the test, switch off/on the UE and go to step 1.

   then count a success for the event "Timer-based", go to step 9. Otherwise count a fail for the event "Timer-based", switch off/on the UE and go to step 1.

9. Repeat steps 4-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

If all events pass, the test passes. If one event fails, the test fails.

17.5.3.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 17.5.3.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Table 17.5.3.1.1.4.3-2: *RRCReconfiguration* (Step 3)

Derivation Path: TS 38.508-1 [14], Table 4.8.1-1B			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 17.5.3.1.1.4.3-3	
}			
}			
}			
}			

Table 17.5.3.1.1.4.3-3: *CellGroupConfig* (Table 17.5.3.1.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.8.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			

spCellConfig SEQUENCE {			
spCellConfigDedicated	ServingCellConfig	Table 17.5.3.1.1.4.3-4	
}			
}			

Table 17.5.3.1.1.4.3-4: *ServingCellConfig* (Table 17.5.3.1.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	2 entries		
BWP-Downlink[1]	BWP-Downlink with condition BWP1	entry 1 Table 17.5.3.1.1.4.3-4	
BWP-Downlink[2]	BWP-Downlink with condition BWP2	entry 2 Table 17.5.3.1.1.4.3-4	
}			
firstActiveDownlinkBWP-Id	1	According to BWP-1	
bwp-InactivityTimer	ms200		
defaultDownlinkBWP-Id	1	According to BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
BWP-Uplink[1]	BWP-Uplink with condition BWP1	entry 1 Table 17.5.3.1.1.4.3-5	
BWP-Uplink[2]	BWP-Uplink with condition BWP2	entry 2 Table 17.5.3.1.1.4.3-5	
firstActiveUplinkBWP-Id	1	According to BWP-1	
}			
}			
}			

Table 17.5.3.1.1.4.3-5: *BWP-Downlink* (Table 17.5.3.1.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9

Information Element	Value/remark	Comment	Condition
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		BWP1
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		BWP2
pdsch-ConfigCommon CHOICE {			
setup	PDSCH-ConfigCommon	Table 17.5.3.1.1.4.3-7	
}			
}			
}			

Table 17.5.3.1.1.4.3-6: *BWP-Uplink* (Table 17.5.3.1.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1	BWP-1	BWP1
	2	BWP-2	BWP2
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1	BWP-1	BWP1
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3	BWP-2	BWP2
}			
}			

Table 17.5.3.1.1.4.3-7: *PDSCH-ConfigCommon* (Table 17.5.3.1.1.4.3-5)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-101			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-ConfigCommon ::= SEQUENCE {			
pdsch-TimeDomainAllocationList	PDSCH-TimeDomainResourceAllocationList	Table 17.5.3.1.1.4.3-8	
}			

Table 17.5.3.1.1.4.3-8: *PDSCH-TimeDomainResourceAllocationList* (Table 17.5.3.1.1.4.3-7)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-103			
Information Element	**Value/remark**	**Comment**	**Condition**
PDSCH-TimeDomainResourceAllocationList ::= SEQUENCE(SIZE(1..maxNrofDL-Allocations)) OF PDSCH-TimeDomainResourceAllocation {	4 entries		
PDSCH-TimeDomainResourceAllocation[1] SEQUENCE {		entry 1	
k0	Not present		
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[2] SEQUENCE {		entry 2	
k0	Not present		

mappingType	typeA		
startSymbolAndLength	72	S=2, L=6	
}			
PDSCH-TimeDomainResourceAllocation[3] SEQUENCE {		entry 3	
k0	$T_{BWPswitchDelay}$	Defined in Table 17.5.3.1.0.1-1	The DCI indicating BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
PDSCH-TimeDomainResourceAllocation[4] SEQUENCE {		entry 4	
k0	1		First DCI right after DCI-based BWP switch
mappingType	typeA		
startSymbolAndLength	53	Start symbol(S)=2, Length(L)=12	
}			
}			

17.5.3.1.1.5 Test requirements

Tables 17.5.3.1.1.4.1-3, 17.5.3.1.1.5-1 and 17.5.3.1.1.5-2 define the primary level settings including test tolerances.

Table 17.5.3.1.1.5-1: NR Cell specific test parameters

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Active BWP ID		1, 2
Initial DL BWP Configuration		DLBWP.0.2 Note 2
Active DL BWP-1 Configuration		DLBWP.1.1 Note 2
Active DL BWP-2 Configuration		DLBWP.1.3 Note 2
Initial UL BWP Configuration		ULBWP.0.2 Note 2
Active UL BWP-1 Configuration		ULBWP.1.1 Note 2
Active UL BWP-2 Configuration		ULBWP.1.3 Note 2
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State		TCI.State.0
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation Condition		AWGN

Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table 17.5.3.1.1.5-2: OTA related test parameters

Parameter	Unit	Cell 1
Angle of arrival configuration		Setup 1 defined in clause A.9.1
Assumption for UE beams Note 6		Fine
N_{oc} Note 1	dBm/15 kHz	-112
N_{oc} Note 1	dBm/SCS	-103
SS-RSRP Note 2	dBm/SCS Note3	-85
$\hat{E}_s/I_{ot}$	dB	18
$\hat{E}_s/N_{oc}$ Note 5	dB	18
Io Note2	dBm/ 95.04 MHz Note4	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.		
Note 6: Information about types of UE beam is given in 38.133 [6] B.2.1.3 and does not limit UE implementation or test system implementation.		

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot (i+$T_{BWPswitchDelay}$+k_1).

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs right after the beginning of DL slot (j+$T_{BWPswitchDelay}$+k_1).

Where, k_1 is the timing between DL data receiving and acknowledgement as specified in 38.214[9].

Depending on UE capability *bwp-SwitchingDelay* [13], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in TS 38.133 [6] Table 8.6A.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot (i+ $T_{BWPswitchDelay}$+k_1), (j+ $T_{BWPswitchDelay}$+k_1), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

17.5.3.2 RRC-based active BWP switch for RedCap

17.5.3.2.0 Minimum conformance requirements for RRC-based active BWP switch

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with one or more than one BWP configuration(s) configured, with

Active BWP switch or parameter change of its active BWPs for PCell

Parameter change of its active BWPs except parameter *firstActiveDownlinkBWP-Id* and *firstActiveUplinkBWP-Id* for SCell

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessing\,Delay}+T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$NR\ Slot\ length$ is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessing\,Delay}$ is the length of the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [2], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

The normative reference for this requirement is TS 38.133 [6] clauses 8.6A.3.

17.5.3.2.1 NR SA FR2 RRC-based DL active BWP switch for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz

- UE PC3

- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

17.5.3.2.1.1 Test purpose

To verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6A.3.

17.5.3.2.1.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards and supporting BWP adaptation of at least 2 BWPs.

17.5.3.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.3.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.3.2.1.

17.5.3.2.1.4 Test description

17.5.3.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.5.3.2.1.4.1-1.

Table 17.5.3.2.1.4.1-1: Supported test configurations

Config	Description
17.5.3.2.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
17.5.3.2.1-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note 1: The UE is only required to be tested in one of the supported test configurations

Configure the test equipment and the DUT according to the parameters in Table 17.5.3.2.1.4.1-2.

Table 17.5.3.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.3.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 17.5.3.2.1.4.1-3.

2. Message contents are defined in clause 17.5.3.2.1.4.3.

3. The test scenario comprises of one NR PCell (Cell 1). Cell 1 is configured according to Annex C.1.2 and C.1.3.

Table 17.5.3.2.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	
T1	s	0.2	

17.5.3.2.1.4.2 Test procedure

The test consists of 1 time period, with duration of T1. Cell 1 has constant signal level throughout the test. PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to Table 17.5.3.2.1.4.1-3, Table 17.5.3.2.1.5-1 and Table 17.5.3.2.1.5-2. Propagation conditions are set according to Annex C clauses C.2.2.

3. The SS shall send an *RRCReconfiguration* message releasing the dedicated configuration of the *initialDownlinkBWP* and the *initialUplinkBWP*. This message also configures another UE-specific bandwidth part, BWP-1 and indicates BWP-1 as the active DL BWP using *firstActiveDownlinkBWP-Id*, according to the initial condition of Active BWP-1 in Table 17.5.3.2.1.5-1.

4. The UE shall transmit an *RRCReconfigurationComplete* message.

5. The SS shall send an *RRCReconfiguration* message with updated bandwidth part configuration for DL BWP switch, change the BWP according to the final condition of Active BWP-1 in Table 17.5.3.2.1.5-1. T1 starts.

6. The UE shall receive the *RRCReconfiguration* in PCell's slot # denoted i and reconfigure its bandwidth part with the updated bandwidth part configuration.

7 If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + X + k_1$ then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one. Where:

- X = 128 for test configuration 17.5.3.2.1-1;
- X = 256 for test configuration 17.5.3.2.1-1.

8. After the SS receives the ACK/NACK in step 7) or when T1 expires, the SS shall transmit *RRCRelease* message to release the RRC connection.

9. After the RRC connection release, the SS:

- transmits in NR Cell 1 a Paging message for the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 (if the paging fails, switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5),

or

- switches off and on the UE and ensures the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5.

10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

The SS verifies the DL BWP switch time in PCell by counting the slots from the time when the RRC Reconfiguration message including updated BWP configuration is sent till a valid ACK/NACK is received.

17.5.3.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 17.5.3.2.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Table 17.5.3.2.1.4.3-2: *RRCReconfiguration* (Test procedure, Step 3 and 5)

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
radioBearerConfig	Not present		
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table 17.5.3.2.1.4.3-3	
dedicatedNAS-MessageList	Not present		
}			
}			
}			
}			

Table 17.5.3.2.1.4.3-3: *CellGroupConfig* (Table 17.5.3.2.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.8.1-2			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			

spCellConfigDedicated	ServingCellConfig	Table 17.5.3.2.1.4.3-4	
}			
}			

Table 17.5.3.2.1.4.3-4: *ServingCellConfig* (Table 17.5.3.2.1.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
pdcch-Config CHOICE {			
release	NULL		
}			
pdsch-Config CHOICE {			
release	NULL		
}			
radioLinkMonitoringConfig CHOICE {			
release	NULL		
}			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1] SEQUENCE {	BWP-Downlink	entry 1 Table 17.5.3.2.1.4.3-5	
}			
firstActiveDownlinkBWP-Id	1	BWP-1	
defaultDownlinkBWP-Id	1	BWP-1	
uplinkConfig SEQUENCE {			
initialUplinkBWP SEQUENCE {			
pucch-Config CHOICE {			
release	NULL		
}			
pusch-Config CHOICE {			
release	NULL		
}			
srs-Config CHOICE {			
release	NULL		
}			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 17.5.3.2.1.4.3-6	
}			
firstActiveUplinkBWP-Id	1	BWP-1	
}			
}			

Table 17.5.3.2.1.4.3-5: *BWP-Downlink* (Table 17.5.3.2.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to DLBWP.1.1		Step 5

}			
}			

Table 17.5.3.2.1.4.3-6: *BWP-Uplink* (Table 17.5.3.2.1.4.3-4)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.3		Step 3
	RIV defined in TS 38.214 [9] that corresponds to ULBWP.1.1		Step 5
}			
}			

17.5.3.2.1.5 Test requirements

Tables 17.5.3.2.1.4.1-3, 17.5.3.2.1.5-1 and 17.5.3.2.1.5-2 define the primary level settings including test tolerances.

Table 17.5.3.2.1.5-1: NR Cell specific test parameters

Parameter		Unit	Cell 1
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66
Active BWP ID			1
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1
'PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table 17.5.3.2.1.5-2: OTA related test parameters

Parameter	Unit	Cell 1
Angle of arrival configuration		Setup 1 defined in clause A.9.1
Assumption for UE beams Note 6		Fine
N_{oc} Note 1	dBm/15 kHz	-112
N_{oc} Note 1	dBm/SCS	-103
SS-RSRP Note 2	dBm/SCS Note3	-85
$\hat{E}_s/I_{ot}$	dB	18
$\hat{E}_s/N_{oc}$ Note 5	dB	18
Io Note2	dBm/ 95.04 MHz Note4	-56

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

17.5.4 Active TCI state switch delay for RedCap

17.5.4.0 Minimum conformance requirements

17.5.4.0.1 Known conditions for TCI state

The minimum requirements given in clause 7.5.4.0.0 shall apply.

17.5.4.0.2 Minimum conformance requirements for MAC-CE based active TCI state switch

The minimum requirements given in clause 7.5.4.0.1 shall apply.

17.5.4.0.3 Minimum conformance requirements for RRC based active TCI state switch

The minimum requirements given in clause 7.5.4.0.2 shall apply.

17.5.4.1 MAC-CE based active TCI state switch for RedCap

17.5.4.1.1 NR SA FR2 MAC-CE based active TCI state switch for a known TCI state for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

17.5.4.1.1.1 Test purpose

To verify the active TCI state switch delay requirement defined in TS 38.133 [6] clause 8.10B.3.

17.5.4.1.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting SA FR2, more than one TCI state configuration, and more than one simultaneously trackable TRS resource set.

17.5.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.4.0.1 and 17.5.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.4.1.1.

17.5.4.1.1.4 Test description

17.5.4.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.8.1.1.4.1 with following exceptions:

- Table 7.5.8.1.1.4.1-1 is replaced by Table 17.5.4.1.1.4.1-1;
- Table 7.5.8.1.1.4.1-2 is replaced by Table 17.5.4.1.1.4.1-2;
- Table 7.5.8.1.1.4.1-3 is replaced by Table 17.5.4.1.1.4.1-3;

Table 17.5.4.1.1.4.1-1: Supported test configurations

Config	Description
17.5.4.1.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table 17.5.4.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.5.4.1.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	0.2	

17.5.4.1.1.4.2 Test procedure

Same as the test procedure given in clause 7.5.8.1.1.4.2.

17.5.4.1.1.4.3 Message contents

Same as the message contents given in clause 7.5.8.1.1.4.3.

17.5.4.1.1.5 Test requirement

Same as the test requirements given in clause 7.5.8.1.1.5 with following exceptions:

- Table 7.5.8.1.1.5-1 is replaced by Table 17.5.4.1.1.5-1;
- Table 7.5.8.1.1.5-2 is replaced by Table 17.5.4.1.1.5-2;

Table 17.5.4.1.1.5-1: NR Cell specific test parameters

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.0
TCI State 1		TCI.State.1
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation Condition		No external noise (Note 2)

Note 1:	OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

Table 17.5.4.1.1.5-2: OTA related test parameters

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.9			
		AoA1		AoA2	
Assumption for UE beams Note 4		Rough			
$\hat{E}_s$	dBm/SCS	-80.9+	-80.9	-Infinity	-80.9
SSB_RP Note 1	dBm/ SCS	-80.9	-80.9	-Infinity	-80.9
$\hat{E}_s/I_{ot}$ BB Note 5	dB	8.3	8.3	-Infinity	8.3
Io Note1	dBm/ 95.04 MHz Note2	-55.71	-55.71	- Infinity	-55.71

Note 1: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 2: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 3: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 4: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 5: Calculation of Es/Iot$_{BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [3] Table 6.2.1.3-4.

17.5.4.2 RRC based active TCI state switch for RedCap

17.5.4.2.1 NR SA FR2 RRC-CE based active TCI state switch for a known TCI state for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

17.5.4.2.1.1 Test purpose

To verify the active TCI state switch delay requirement defined in TS 38.133 [6] clause 8.10B.5.

17.5.4.2.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2 Rx from Release 17 onwards supporting SA FR2, more than one TCI state configuration, and more than one simultaneously trackable TRS resource set.

17.5.4.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.4.0.1 and 17.5.4.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.4.2.1.

17.5.4.2.1.4 Test description

17.5.4.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.8.2.1.4.1 with following exceptions:

- Table 7.5.8.2.1.4.1-1 is replaced by Table 17.5.4.2.1.4.1-1;
- Table 7.5.8.2.1.4.1-2 is replaced by Table 17.5.4.2.1.4.1-2;
- Table 7.5.8.2.1.4.1-3 is replaced by Table 17.5.4.2.1.4.1-3;

Table 17.5.4.2.1.4.1-1: Supported test configurations

Config	Description
17.5.4.2.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table 17.5.4.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.4.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.5.4.2.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	2	

17.5.4.2.1.4.2 Test procedure

Same as the test procedure given in clause 7.5.8.2.1.4.2.

17.5.4.2.1.4.3 Message contents

Same as the message contents given in clause 7.5.8.2.1.4.3.

17.5.4.2.1.5 Test requirement

Same as the test requirements given in clause 7.5.8.2.1.5 with following exceptions:

- Table 7.5.8.2.1.5-1 is replaced by Table 17.5.4.2.1.5-1;
- Table 7.5.8.2.1.5-2 is replaced by Table 17.5.4.2.1.5-2;

Table 17.5.4.2.1.5-1: NR Cell specific test parameters

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD

TDD configuration		TDDConf.3.1
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.0
TCI State 1		TCI.State.1
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	640
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation Condition		No external noise (Note 2)

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

Table 17.5.4.2.1.5-2: OTA related test parameters

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.9			
		AoA1		AoA2	
Assumption for UE beams Note 4		Rough			
$\hat{E}_s$	dBm/SCS	-80.9	-80.9	-Infinity	-80.9
SSB_RP Note 1	dBm/ SCS	-80.9	-80.9	-Infinity	-80.9
$\hat{E}_s/I_{ot}$ BB Note 5	dB	8.3	8.3	-Infinity	8.3
Io Note1	dBm/ 95.04 MHz Note2	-55.71	-55.71	- Infinity	-55.71

Note 1: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 2: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 3: As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 4: Information about types of UE beam is given in 38.133 [6] clause B.2.1.3 and does not limit UE implementation or test system implementation.
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [3], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [3] Table 6.2.1.3-4.

17.5.5 Uplink spatial relation switch delay for RedCap

17.5.5.1 MAC-CE based Spatial Relation switch for RedCap

17.5.5.1.0 Minimum conformance requirements MAC-CE based uplink spatial relation switch delay

The spatial relation associated to DL RS is known if the following conditions are met:

- During the period from the last transmission of the DL RS resource used for the L1-RSRP measurement reporting for the target spatial relation to the completion of active spatial relation, where the DL RS resource for L1-RSRP measurement is the DL RS in target spatial relation or QCLed to the target spatial relation with QCL type-D.
  - Spatial relation switch command is received within 1280 ms upon the last transmission of the DL RS resource for beam reporting or measurement
  - The UE has sent at least 1 L1-RSRP report for the target spatial relation before the spatial relation switch command
  - The DL RS configured in spatial relation remains detectable during the spatial relation switching period
    - SNR of the DL RS configured in spatial relation ≥ -3dB
  - The SSB associated with the spatial relation remain detectable during the spatial relation switching period
    - SNR of the SSB associated with the spatial relation ≥ -3dB

Otherwise, the spatial relation is unknown.

If the target spatial relation associated to DL RS is known and UE is configured with uplink resources for transmission on target spatial relation, upon receiving PDSCH carrying MAC-CE activation command in slot n, for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation no later than slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ 1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1 where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].

If the target spatial relation associated to DL RS is unknown and UE is configured with uplink resources for transmission on target spatial relation, upon receiving PDSCH carrying MAC-CE activation command in slot n, for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation no later than slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$+ $T_{L1\text{-}RSRP}$+1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],
- $T_{L1\text{-}RSRP}$ is the time for Rx beam refinement in FR2, defined as
  - $T_{L1\text{-}RSRP_Measurement_Period_SSB_RedCap}$ for SSB as specified in clause 9.5B,
    - with the assumption of M=1
    - with T_{Report} = 0
  - $T_{L1\text{-}RSRP_Measurement_Period_CSI\text{-}RS_RedCap}$ for CSI-RS as specified in clause 9.5.4.2
    - configured with higher layer parameter *repetition* set to ON
    - with the assumption of M=1 for periodic CSI-RS
    - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
    - with $_{T}$Report = 0

The UE shall be able to transmit with the old UL spatial relation until slot n+ T_{HARQ} + $3N_{slot}^{subframe,\mu}$.

When the UL spatial relation info switch for PUCCH changes both the associated DL RS and *pucch-PathlossReferenceRS* with the same MAC-CE activation, and if both the DL RS and *pucch-PathlossReferenceRS* are known as specified in clause 8.12A.2 and 8.14.2 respectively, the UE shall be able to transmit PUCCH with the target UL spatial relation after the delay specified in clause 8.14.3. If either the associated DL RS or *pucch-PathlossReferenceRS* are unknown, a longer switching delay is allowed. The UE is not required to transmit PUCCH with the target UL spatial relation until the DL RS and pathloss reference RS switch are completed.

The normative reference for this requirement is TS 38.133 [6] clauses 8.12A.2 and 8.12A.3.

17.5.5.1.1 NR SA FR2 MAC-CE based spatial relation switch associated with known DL-RS for 2 Rx UE

Editor's Note: This test case is incomplete in following aspects:

- Message contents are still TBD.

TT analysis is available for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

17.5.5.1.1.1 Test purpose

To verify fulfillment of the uplink spatial relation switch delay requirement defined in 38.133 [6] clause 8.12A.3 by a UE capable of beam correspondence without the need for UL beam sweeping.

17.5.5.1.1.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.5.5.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.5.1.0.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.5.1.1.

17.5.5.1.1.4 Test description

17.5.5.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.9.1.1.4.1 with following exceptions:

- Table 7.5.9.1.1.4.1-1 is replaced by Table 17.5.5.1.1.4.1-1;
- Table 7.5.9.1.1.4.1-2 is replaced by Table 17.5.5.1.1.4.1-2;
- Table 7.5.9.1.1.4.1-3 is replaced by Table 17.5.5.1.1.4.1-3;

Table 17.5.5.1.1.4.1-1: Supported test configurations

Config	Description
17.5.5.1.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table 17.5.5.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.5.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

Table 17.5.5.1.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	[0.2]	
T2	s	[2]	

17.5.5.1.1.4.2 Test procedure

Same as the test procedure given in clause 7.5.9.1.1.4.2.

17.5.5.1.1.4.3 Message contents

Same as the message contents given in clause 7.5.9.1.1.4.3.

17.5.5.1.1.5 Test requirements

Same as the test requirements given in clause 7.5.9.1.1.5 with following exceptions:

- Table 7.5.9.1.1.5-1 is replaced by Table 17.5.5.1.1.5-1;
- Table 7.5.9.1.1.5-2 is replaced by Table 17.5.5.1.1.5-2.

Table 17.5.5.1.1.5-1: NR Cell specific test parameters

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1

TCI State-0 Configuration		TCI.State.0
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Spatial Relation Info-0 Configuration		PUCCH.SRI.0
Spatial Relation Info-1 Configuration		PUCCH.SRI.1
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 17.5.5.1.1.5-2: OTA related test parameters

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.9.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
N_{oc} Note 1	dBm/15 kHz	-92.1			
N_{oc} Note 1	dBm/SCS	-83.1			
$\hat{E}_s/N_{oc}$	dB	1		-infinity	1
SS-RSRP Note 2	dBm/120 kHz Note3	-82.1		-infinity	-82.1
Io Note2	dBm/95.04 MHz Note4	-50.6		-54.1	-50.6
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.					
Note 6: Information about types of UE beam is given in 38.133 [6] B.2.1.3 and does not limit UE implementation or test system implementation.					

17.5.5.2 RRC based spatial relation switch for RedCap

17.5.5.2.0 Minimum conformance requirements RRC based uplink spatial relation switch delay

The spatial relation associated to DL RS is known if the following conditions are met:

- During the period from the last transmission of the DL RS resource used for the L1-RSRP measurement reporting for the target spatial relation to the completion of active spatial relation, where the DL RS resource for L1-RSRP measurement is the DL RS in target spatial relation or QCLed to the target spatial relation with QCL type-D.

  - Spatial relation switch command is received within 1280 ms upon the last transmission of the DL RS resource for beam reporting or measurement

- The UE has sent at least 1 L1-RSRP report for the target spatial relation before the spatial relation switch command
- The DL RS configured in spatial relation remains detectable during the spatial relation switching period
  - SNR of the DL RS configured in spatial relation ≥ -3dB
- The SSB associated with the spatial relation remain detectable during the spatial relation switching period
  - SNR of the SSB associated with the spatial relation ≥ -3dB

Otherwise, the spatial relation is unknown.

If the target spatial relation associated to DL RS is known and UE is configured with uplink resources for transmission on target spatial relation, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured no later than slot n+ $T_{RRC_processing}$ /*NR slot length* +1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command,
- $T_{RRC_processing}$ is the RRC processing delay defined in 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331 [2].

If the target spatial relation associated to DL RS is unknown and UE is configured with uplink resources for transmission on target spatial relation, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured no later than slot n+ $T_{RRC_processing}$ /*NR slot length* + $T_{L1\text{-}RSRP}$ +1 when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command,
- $T_{RRC_processing}$ is the RRC processing delay defined in 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331 [2].
- $T_{L1\text{-}RSRP}$ is defined in clause 8.12A.3

For RedCap UE in HD-FDD mode, if a downlink reception overlaps with target periodic SRS with spatial relation of the serving cell with periodic SRS with spatial relation reconfigured then the UE is allowed to postpone the uplink transmission.

The normative reference for this requirement is TS 38.133 [6] clauses 8.12A.2 and 8.12A.5.

17.5.5.2.1 NR SA FR2 RRC-based spatial relation switch associated with a known DL-RS for 2 Rx UE

Editor's Note: This test case is incomplete in following aspects:

- Message contents are still TBD.

TT analysis is available for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

17.5.5.2.1.1 Test purpose

To verify fulfillment of the uplink spatial relation switch delay requirement defined in 38.133 [6] clause 8.12A.5 by a UE capable of beam correspondence without the need for UL beam sweeping.

17.5.5.2.1.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.5.5.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.5.2.0.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.5.2.1.

17.5.5.2.1.4 Test description

Same as the test description given in clause 7.5.9.2.1.4.

17.5.5.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.5.9.2.1.4.1 with following exceptions:

- Table 7.5.9.2.1.4.1-1 is replaced by Table 17.5.5.2.1.4.1-1;
- Table 7.5.9.2.1.4.1-2 is replaced by Table 17.5.5.2.1.4.1-2;
- Table 7.5.9.2.1.4.1-3 is replaced by Table 17.5.5.2.1.4.1-3;

Table 17.5.5.2.1.4.1-1: Supported test configurations

Config	Description
17.5.5.2.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table 17.5.5.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.5.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

Table 17.5.5.2.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel 1	dB	0	Individual offset for cells on PCC.
timeRestrictionForChannelMeasurements		configured	Time domain measurement restriction for the channel (signal) measurements (see TS 38.214 [19], clause 5.2.1.1)
T1	s	0.5	
T2	s	1.5	

17.5.5.2.1.4.2 Test procedure

Same as the test procedure given in clause 7.5.9.2.1.4.2.

17.5.5.2.1.4.3 Message contents

Same as the message contents given in clause 7.5.9.2.1.4.3.

17.5.5.2.1.5 Test requirements

Same as the test requirements given in clause 7.5.9.2.1.5 with following exceptions:

- Table 7.5.9.2.1.5-1 is replaced by Table 17.5.5.2.1.5-1;
- Table 7.5.9.2.1.5-2 is replaced by Table 17.5.5.2.1.5-2.

Table 17.5.5.2.1.5-1: NR Cell specific test parameters

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
$BW_{channel}$		100 MHz: $N_{RB,c}$ = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
SRS-SpatialRelation0		SRS.SRI0
SRS-SpatialRelation1		SRS.SRI1
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	160
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 17.5.5.2.1.5-2: OTA related test parameters

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.9.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			

N_{oc} Note 1	dBm/15 kHz	-92.1			
N_{oc} Note 1	dBm/SCS	-83.1			
$\hat{E}_s/N_{oc}$	dB	1	1	-infinity	1
SS-RSRP Note 2	dBm/SCS Note3	-82.1	-82.1	-infinity	-82.1
Io Note2	dBm/95.04 MHz Note4	-50.6	-50.6	-54.1	-50.6

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6: Information about types of UE beam is given in 38.133 [6] B.2.1.3 and does not limit UE implementation or test system implementation.

17.5.6 UE specific CBW change for RedCap

17.5.6.0 Minimum conformance requirements

17.5.6.0.1 Minimum conformance requirements for UE specific CBW change

The minimum conformance requirements given in clause 16.5.4.0.1 applies.

17.5.6.1 NR SA FR2 UE specific CBW change on PCell for 2 Rx UE

17.5.6.1.1 Test purpose

To verify the UE specific CBW change delay requirement defined in 38.133 [6] clause 8.13A.

17.5.6.1.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards.

17.5.6.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.5.6.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.5.6.1.

17.5.6.1.4 Test description

The test scenario comprises of one Cell, PCell (Cell 1), which has constant signal levels throughout the test. The test consists of 1 time period with duration of T1.

During T1 the TE sends an *RRCReconfiguration* message containing *SCS-SpecificCarrier* to reconfigure UE-specific CBW. The test equipment verifies the UE specific CBW switching delay in PCell by estimating the time from the moment the *RRCReconfiguration* message including updated UE-specific CBW configuration is sent to the moment a valid ACK/NACK is received.

17.5.6.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.5.6.1.4.1-1.

Table 17.5.6.1.4.1-1: Supported test configurations

Config	Description
17.5.6.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
17.5.6.1-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note 1: The UE is only required to be tested in one of the supported test configurations

Configure the test equipment and the DUT according to the parameters in Table 17.5.6.1.4.1-2.

Table 17.5.6.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.5.6.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 17.5.6.1.4.1-3.

2. Message contents are defined in clause 17.5.6.1.4.3.

3. There is one NR carrier and one NR cells specified in the test. Cell 1 is the NR cell used for connection setup with the power level set according to Annex C.1.2 and C.1.3 for this test.

Table 17.5.6.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

17.5.6.1.4.2 Test procedure

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. UE has been configured with UE specific CBW (CBW-1), initial BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP.

2. The SS starts sending PDCCHs indicating new transmissions continuously on Cell 1.

3. The SS sends an *RRCReconfiguration* message containing *SCS-SpecificCarrier* with updated UE specific CBW (CBW-2), dedicated BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP.

4. T1 starts from the beginning of the last slot (denoted as slot #i) carrying the PDSCH containing the *RRCReconfiguration* message in step 3.

5 If the UE starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{RRCprocessingDelay}+T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$, then the number of successful tests is increased by one.
Otherwise, the number of failure tests is increased by one.

6. After the SS receives the ACK/NACK in step 5 or when T1 expires, the SS shall

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   or

   - switch the UE off.

7. Depending on the choice in step 6, the SS shall,

   - transmit in NR Cell 1 a *Paging* message including matched ng-5G-S-TMSI for the UE if an *RRCRelease* has been sent in step 6. If the paging fails, switches off and on the UE,

   or

   - switch on the UE if the UE is switched off in step 6.

8. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5. UE has been configured with UE specific CBW (CBW-1), initial BWP (BWP-1) and *firstActiveDownlinkBWP-Id* indicating BWP-1 is the active BWP.

9. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

17.5.6.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 17.5.6.1.4.3-1:*ServingCellConfigCommon* (step 1, 3 and 8, test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-168			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon::= SEQUENCE {			
downlinkConfigCommon SEQUENCE {			
initialDownlinkBWP SEQUENCE {			
genericParameters	Set according to DLBWP.0.1		
}			
uplinkConfigCommon SEQUENCE {			
initialUplinkBWP SEQUENCE {	BWP-UplinkCommon		
genericParameters	Set according to ULBWP.0.1		
}			
}			
}			

Table 17.5.6.1.4.3-2: *ServingCellConfig* (step 1, 3 and 8, test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
uplinkConfig SEQUENCE {			
uplinkChannelBW-PerSCS-List SEQUENCE (SIZE (1..maxSCSs)) OF SCS-SpecificCarrier {	1 entry		
SCS-SpecificCarrier[1]	SCS-SpecificCarrier-UL	Entry 1 Table 17.5.6.1.4.3-4	
}			
}			
downlinkChannelBW-PerSCS-List SEQUENCE (SIZE (1..maxSCSs)) OF SCS-SpecificCarrier {	1 entry		
SCS-SpecificCarrier[1]	SCS-SpecificCarrier-DL	Entry 1 Table 17.5.6.1.4.3-3	
}			
}			

Table 17.5.6.1.4.3-3: *SCS-SpecificCarrier-DL* (Table 17.5.6.1.4.3-2)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-160			
Information Element	**Value/remark**	**Comment**	**Condition**
SCS-SpecificCarrier ::= SEQUENCE {			

offsetToCarrier	The offset between point A and the lowest PRB index to guarantee the CBW including SSB and CORESET#0	CBW-1 (DLCBW.1.1)	step 1 or step 8
	The offset between Point A and the lowest usable subcarrier on this carrier, i.e. the offsetToCarrier given in 38.508-1[14] clause 4.3.1.	CBW-2 (DLCBW.1.2)	step 3
}			

Table 17.5.6.1.4.3-4: *SCS-SpecificCarrier-UL* (Table 17.5.6.1.4.3-2)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-160			
Information Element	**Value/remark**	**Comment**	**Condition**
SCS-SpecificCarrier ::= SEQUENCE {			
offsetToCarrier	Any offset within the CBW of test frequency given in 38.508-1[14] clause 4.3.1.and different with offsetToCarrier of ULCBW.1.2	CBW-1 (ULCBW.1.1)	step 1 or step 8
	The offset between Point A and the lowest usable subcarrier on this carrier, i.e. the offsetToCarrier given in 38.508-1[14] clause 4.3.1.	CBW-2 (ULCBW.1.2)	step 3
}			

17.5.6.1.5 Test requirement

Table 17.5.6.1.4.1-3, Table 17.5.6.1.5-1 and Table 17.5.6.1.5-2 define the primary level settings including test tolerances.

Table 17.5.6.1.5-1: NR Cell specific test parameters

Parameter		Unit	Cell 1
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
$BW_{channel}$			100 MHz: $N_{RB,c}$ = 66
Active DL BWP ID			1
Initial DL BWP Configuration (BWP-1)			DLBWP.0.1
Initial UL BWP Configuration			ULBWP.0.1
Initial Condition	Active DL CBW-1 Configuration		DLCBW.1.1
	Active UL CBW-1 Configuration		ULCBW.1.1
Final Condition	Active DL CBW-1 Configuration		DLCBW.1.2
	Active UL CBW-1 Configuration		ULCBW.1.2
'PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2

Propagation Condition		AWGN
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

Table A.17.5.6.1.1-4: OTA related test parameters for UE specific CBW change test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams Note 5			Fine
N_{oc} Note1	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} Note1	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP Note2	NR_TDD_FR2_A	dBm/SCS Note3	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18
Io Note2	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.			

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot i + $\frac{T_{\text{RRCprocessingDelay}}+T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ + k1.

Where, *k1* is the timing between DL data receiving and acknowledgement as specified in TS 38.213[7].

All of the above test requirements shall be fulfilled in order for the observed PCell UE specific CBW change delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

17.6 Measurement procedures for RedCap

17.6.1 Intra-frequency measurements for RedCap

17.6.1.0 Minimum conformance requirements

17.6.1.0.1 General

A measurement is defined as a SSB based intra-frequency measurement provided the centre frequency of the reference SSB of the serving cell and the centre frequency of the SSB of the neighbour cell are the same, and the subcarrier spacing of the two SSBs are also the same. The reference SSB is the SSB defined in BWP-specific *servingCellMO* under *BWP-DownlinkDedicated* of active DL BWP. If the field is absent, the reference SSB is the SSB defined in *servingCellMO* under *ServingCellConfig*.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell, even if no explicit neighbour list with physical layer cell identities is provided.

The UE can perform intra-frequency SSB based measurements without measurement gaps if

- the SSB is completely contained in the active BWP of the UE, or
- the active downlink BWP is initial BWP [3].

For intra-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in 38.133 [6] clause 9.2B.5.3.

SSB based measurements are configured along with one or two measurement timing configuration(s) (SMTC(s)) which provides periodicity, duration and offset information on a window of up to 5ms where the measurements are to be performed. For intra-frequency connected mode measurements, up to two measurement window periodicities may be configured. A single measurement window offset and measurement duration are configured per intra-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB which start earlier than the gap starting time + switching time, nor detect SSB which end later than the gap end – switching time. Switching time is 0.5ms for frequency range FR1.

The requirements in this clause apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- For 2Rx RedCap:
  - SS-RSRP related side conditions given in 38.133 [6] clauses 10.1.2 and 10.1.3 for FR1 and FR2, respectively, for a corresponding Band,
  - SS-RSRQ related side conditions given in 38.133 [6] clauses 10.1.7 and 10.1.8 for FR1 and FR2, respectively, for a corresponding Band,

- SS-SINR related side conditions given in 38.133 [6] clauses 10.1.12 and 10.1.13 for FR1 and FR2, respectively, for a corresponding Band,

- SSB_RP and SSB Ês/Iot according to Annex B.2.2 for a corresponding Band.

For 2Rx RedCap: The requirements in 38.133 [6] clause 9.2.4.3 shall apply.

The UE shall not send any event triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: 2 x TTI_{DCCH}. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify\ intra\ without\ index_RedCap}$ defined in clause 17.6.1.0.2 or clause 17.6.1.0.3. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_intra_without_index_RedCap}$ as defined in clause 17.6.1.0.2 or clause 17.6.1.0.3. If a cell which has been detectable at least for the time period $T_{identify\ intra\ without\ index_RedCap}$ defined in clause 17.6.1.0.2 or clause 17.6.1.0.3 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra_RedCap}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ T_c while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clauses 9.2B.1 and 9.2B.4.3.

17.6.1.0.2 Minimum conformance requirements for event-triggered measurement without gap

The UE shall be able to identify a new detectable intra-frequency cell within $T_{identify_intra_without_index_RedCap}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index(*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index_RedCap.}$ It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR2.

$$T_{identify_intra_without_index_RedCap} = (T_{PSS/SSS_sync_intra_RedCap} + T_{SSB_measurement_period_intra_RedCap})\ ms$$

Where:

$T_{PSS/SSS_sync_intra_RedCap}$: it is the time period used in PSS/SSS detection given in Table 17.6.1.0.2-1.

$T_{SSB_measurement_period_intra_RedCap}$: equal to a measurement period of SSB based measurement given in Table 17.6.1.0.2-2.

$CSSF_{intra_RedCap}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap_RedCap,i}$ in 38.133[6] clause 9.1A.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps, or according to $CSSF_{within_gap_RedCap,i}$ in 38.133[6] clause 9.1A.5.2 for measurement conducted within measurement gaps, i.e. when intra-frequency SMTC is fully overlapping with measurement gaps.

if the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

For 2Rx RedCap:

$M_{pss/sss_sync_w/o_gaps_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{pss/sss_sync_w/o_gaps_RedCap}$ =40. For a UE supporting power class 2, $M_{pss/sss_sync_w/o_gaps_RedCap}$ =24. For a UE supporting FR2 power class 3,

$M_{pss/sss_sync_w/o_gaps_RedCap}$ =24. For a UE supporting FR2 power class 4, $M_{pss/sss_sync_w/o_gaps_RedCap}$ =24, For a UE supporting FR2 power class 7, $M_{pss/sss_sync_w/o_gaps_RedCap}$ = 24.

$M_{meas_period_w/o_gaps_RedCap}$: For a UE supporting power class 1 or 5, $M_{meas_period_w/o_gaps_RedCap}$ =40. For a UE supporting FR2 power class 2, $M_{meas_period_w/o_gaps_RedCap}$ =24. For a UE supporting power class 3, $M_{meas_period_w/o_gaps_RedCap}$ =24. For a UE supporting power class 4, $M_{meas_period_w/o_gaps_RedCap}$ =24, For a UE supporting power class 7, $M_{meas_period_w/o_gaps_RedCap}$ = 24.

When intra-frequency SMTC is fully non overlapping with measurement gaps or intra-frequency SMTC is fully overlapping with MGs, Kp=1

When intra-frequency SMTC is partially overlapping with measurement gaps, Kp = 1/(1- (SMTC period /MGRP)), where SMTC period < MGRP. For calculation of Kp, if the high layer signalling (TS 38.331 [2]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*.

If the higher layer signalling in TS38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index_RedCap}$

For FR2,

$K_{layer1_measurement}$=1,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged. and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{layer1_measurement}$=1.5, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

If the higher layer signalling in TS38.331 [2] signalling of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{SSB_measurement_period_intra_RedCap}$.

For FR2, a longer measurement period is allowed, if aperiodic CSI-RS resource is measured for L1-RSRP measurement on any FR2 serving frequency in the same band, and the CSI-RS resource is outside measurement gap and overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols. If *SSB-ToMeasure* or *SS-RSSI-Measurement* is configured, the SSB symbols are indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same band which can be merged and the RSSI symbols are indicated by *SS-RSSI-Measurement*.

Table 17.6.1.0.2-1: Time period for PSS/SSS detection, (Frequency range FR2) for 2Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600ms, ceil($M_{pss/sss_sync_w/o_gaps_RedCap}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5 x $M_{pss/sss_sync_w/o_gaps_RedCap}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil($M_{pss/sss_sync_w/o_gaps_RedCap}$ x K_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 17.6.1.0.2-2: Measurement period for intra-frequency measurements without gaps (FR2) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max(400ms, ceil($M_{meas_period_w/o_gaps_RedCap}$ x K_p x $K_{layer1_measurement}$) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5x $M_{meas_period_w/o_gaps_RedCap}$ x K_p x $K_{layer1_measurement}$) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil($M_{meas_period_w/o_gaps_RedCap}$ xK_p x $K_{layer1_measurement}$) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 17.6.1.0.2-6: Measurement period for intra-frequency measurements without gaps (FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max([200]ms, ceil([5] x K_p) x SMTC period)[Note 1] x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max([200]ms, ceil(1.5x [5] x K_p) x max(SMTC period,DRX cycle)) x $CSSF_{intra_RedCap}$
DRX cycle>320ms	ceil([5] x K_p) x DRX cycle x $CSSF_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

The following scheduling restriction applies due to SS-RSRP or SS-SINR measurement on an FR2 intra-frequency cell

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration (The signalling *deriveSSB_IndexFromCell* is always enabled for FR2). If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 intra-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration (The signalling *deriveSSB_IndexFromCellc* is always enabled for FR2). If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

If following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots.

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE is expected to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE is expected to receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

The normative reference for this requirement is TS 38.133 [6] clauses 9.2B.5.

17.6.1.0.3 Minimum conformance requirements for event-triggered measurement with gap

The UE shall be able to identify a new detectable intra frequency cell within $T_{identify_intra_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous

with the serving cell (*deriveSSB-IndexFromCell* is enabled). The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{identify_intra_without_index_RedCap}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR2.

$$T_{identify_intra_without_index_RedCap} = T_{PSS/SSS_sync_intra_RedCap} + T_{SSB_measurement_period_intra_RedCap} \text{ ms}$$

Where:

$T_{PSS/SSS_sync_intra_RedCap}$: it is the time period used in PSS/SSS detection given in Table 17.6.1.0.3-1.

$T_{SSB_measurement_period_intra_RedCap}$: equal to a measurement period of SSB based measurement given in Table 17.6.1.0.3-2.

$CSSF_{intra_RedCap}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap_RedCap,i}$ in 38.133 [6] clause 9.1A.5.2 for measurement conducted within measurement gaps.

For 2Rx RedCap:

$M_{pss/sss_sync_with_gaps_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{pss/sss_sync\ with_gaps_RedCap}$ =40. For a UE supporting FR2 power class 2, $M_{pss/sss_sync\ with_gaps_RedCap}$ =24. For a UE supporting FR2 power class 3, $M_{pss/sss_sync\ with_gaps_RedCap}$ =24. For a UE supporting power class 4, $M_{pss/sss_sync\ with_gaps_RedCap}$ =24, For a UE supporting FR2 power class 7, $M_{pss/sss_sync\ with_gaps_RedCap}$ =24.

$M_{meas_period_with_gaps_RedCap}$: For a UE supporting power class 1 or 5, $M_{meas_period_with_gaps_RedCap}$ =40. For a UE supporting power class 2, $M_{meas_period_with_gaps_RedCap}$ =24. For a UE supporting power class 3, $M_{meas_period_with_gaps_RedCap}$ =24. For a UE supporting power class 4, $M_{meas_period\ with_gaps_RedCap}$ =24, For a UE supporting power class 7, $M_{meas_period_with_gaps_RedCap}$ =24.

If the higher layer signalling in TS 38.331 [2] of *smtc2* is present and smtc1 is fully overlapping with measurement gaps and smtc2 is partially overlapping with measurement gaps, requirements are not specified for $T_{identify_intra_without_index_RedCap}$ or $T_{identify_intra_with_index_RedCap}$.

Table 17.6.1.0.3-1: Time period for PSS/SSS detection (FR2) for 2Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	max(600ms, $M_{pss/sss_sync_with_gaps_RedCap}$ x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(600ms, ceil(1.5x $M_{pss/sss_sync_with_gaps_RedCap}$) x max(MGRP, SMTC period, DRX cycle)) x $CSSF_{intra_RedCap_RedCap}$
DRX cycle>320ms	$M_{pss/sss_sync_with_gaps_RedCap}$ x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

Table 17.6.1.0.3-2: Measurement period for intra-frequency measurements with gaps (FR2) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	max(400ms, $M_{meas_period\ with_gaps_RedCap}$ x max(MGRP, SMTC period)) x $CSSF_{intra_RedCap}$
DRX cycle≤ 320ms	max(400ms, ceil(1.5 x $M_{meas_period\ with_gaps_RedCap}$) x max(MGRP, SMTC period, DRX cycle)) Note 1 x $CSSF_{intra_RedCap}$
DRX cycle>320ms	$M_{meas_period\ with_gaps_RedCap}$ x max(MGRP, DRX cycle) x $CSSF_{intra_RedCap}$

The normative reference for this requirement is TS 38.133 [6] clauses 9.2B.6.

17.6.1.1 NR SA FR2 event triggered reporting without gap in non-DRX for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

Test frequency f ≤ 40.8 GHz

UE PC3

This test case is incomplete for UE power classes other than PC3 (e.g. PC7)

This test case is incomplete for test frequencies > 40.8 GHz

17.6.1.1.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements for RedCap in 38.133 [6] clause 9.2B.5.1 and 9.2B.5.2

17.6.1.1.2 Test applicability

This test applies to all types of NR RedCap UE from release 17 onwards.

17.6.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.1.0.1 and 17.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.1.1.

17.6.1.1.4 Test description

17.6.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.6.1.1.4.1 with following exceptions:

- Table 7.6.1.1.4.1-1 is replaced by Table 17.6.1.1.4.1-1.
- Table 7.6.1.1.4.1-2 is replaced by Table 17.6.1.1.4.1-2.

Table 17.6.1.1.4.1-1: Supported test configurations

Test Config	Description
17.6.1.1-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
17.6.1.1-2	240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test requirement and the DUT according to the parameters in Table 17.6.1.1.4.1-2.

Table 17.6.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.6.1.1.4.1-3: General test parameters

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used

DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μs	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

17.6.1.1.4.2 Test procedure

Same as the test procedure given in clause 7.6.1.1.4.2 with following exceptions:

- Step 6 in test procedure in clause 7.6.1.1.4.2 is replaced by following steps.

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than X ms then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X is

   - 2402 ms for UE supporting power class 1 or 5

   - 1442 ms for UE supporting power class 2, 3, 4 or 7,

17.6.1.1.4.3 Message contents

Same as the message contents given in clause 7.6.1.1.4.3.

17.6.1.1.5 Test requirement

Same as the test requirements given in clause 7.6.1.1.5 with following exceptions:

- Table 7.6.1.1.5-1 is replaced by Table 17.6.1.1.5-1.
- Table 7.6.1.1.5-2 is replaced by Table 17.6.1.1.5-2.
- X is

  - 2.4s for a UE supporting power class 1 or 5,

  - 1.44s for a UE supporting power class 2, 3, 4 or 7.

Table 17.6.1.1.5-1: NR Cell specific test parameters

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$	MHz	1,2	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Initial BWP configuration		1,2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1,2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1,2	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2	CCR.3.7 TDD		N/A	
TRS configuration		1,2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1,2	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120		120	
OCNG Patterns		1,2	OP.5		N/A	
cellIndividualOffset	dB	1,2	N/A		16	

SSB		1	SSB.1 FR2	SSB.7 FR2
		2	SSB.2 FR2	SSB.8 FR2
Propagation Condition		1,2	No external noise (Note 1)	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].				

Table 17.6.1.1.5-2: NR OTA Cell specific test parameters

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.9.3			
			AoA1		AoA2	
Beam assumption[Note 4]		1,2	Rough		Rough	
E_s	dBm/ SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/ SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
Io	dBm/ 95.04 MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure 7.6.1.1.5-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Void Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.						

17.6.1.2 NR SA FR2 event triggered reporting without gap in DRX for 2 Rx UE

Editor's Note: This test case is complete for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for Test frequency f > 40.8 GHz

This test case is incomplete for UE power class other than PC3.

17.6.1.2.1 Test purpose

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in 38.133 [6] clause 9.2B.5.1 and 9.2B.5.2.

17.6.1.2.2 Test applicability

This test applies to all types of NR RedCap UEs from release 17 supporting 5GS NR SA FR2 and long DRX cycle.

17.6.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.1.0.1 and 17.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.1.2.

17.6.1.2.4 Test description

17.6.1.2.4.1 Initial conditions

Same as the initial conditions given in clause 7.6.1.2.4.1 with following exceptions:

- Table 7.6.1.2.4.1-1 is replaced by Table 17.6.1.2.4.1-1.
- Table 7.6.1.2.4.1-2 is replaced by Table 17.6.1.2.4.1-2.

Table 17.6.1.2.4.1-1: Supported test configurations

Test Case ID	Description
7.6.1.2-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
7.6.1.2-2	240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 17.6.1.2.4.1-2: Initial conditions for NR SA FR2 event-triggered reporting without gap in DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

17.6.1.2.4.2 Test procedure

Same as the test procedure given in clause 7.6.1.2.4.2 with following exceptions:

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than X ms for sub-test 1 or less than Y ms for sub-test 2 then the number of successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement, then the number of failure tests is increased by one. Where X is

   - 7202 for UE supporting power class 1 or 5,
   - 4322 for UE supporting power class 2, 3, 4 or 7.

   and Y is

   - 51202 for UE supporting power class 1 or 5,
   - 30722 for UE supporting power class 2, 3, 4 or 7.

17.6.1.2.4.3 Message contents

Same as the message contents given in clause 7.6.1.2.4.3.

17.6.1.2.5 Test requirement

Same as the test requirements given in clause 7.6.1.2.5 with following exceptions:

- For sub-test 1, X is

- X = 7202 for UE supporting power class 1 or 5;
- X = 4322 for UE supporting power class 2, 3, 4 or 7;

- For sub-test 2, X is
  - X = 51202 for UE supporting power class 1 or 5;
  - X = 30722 for UE supporting power class 2, 3, 4 or 7;

17.6.1.3 NR SA FR2 event triggered reporting with gap in non-DRX for 2 Rx UE

Editor's Note:

This test case is complete for the following configurations:

- UE PC3
- Test frequencies f ≤ 40.8 GHz;

This test case is incomplete for UE power classes other than PC3;

This test case is incomplete for test frequencies f > 40.8 GHz.

17.6.1.3.1 Test purpose

The purpose of this test is to verify UE's ability to make a correct reporting of an event with gaps under non-DRX within intra-frequency cell search with gaps requirements. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 [6] clause 9.2B.6.1 and 9.2B.6.2.

17.6.1.3.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards supporting CSI-RS based RLM and BWP operation without bandwidth restriction.

17.6.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.1.0.1 and 17.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.1.3.

17.6.1.3.4 Test description

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The general and cell specific test parameters for PCell and neighbour cell are given in Table 17.6.1.3.4.1-3, Table 17.6.1.3.5-1 and Table 17.6.1.3.5-2, respectively. In the measurement configuration a measurement object is configured for the frequency of the PCell and indicates to the UE that event-triggered reporting with Event A3 is used.

17.6.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.6.1.3.4.1-1.

Table 17.6.1.3.4.1-1: Supported test configurations

Test Case ID	Description
17.6.1.3-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
17.6.1.3-2	240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 17.6.1.3.4.1-2.

Table 17.6.1.3.4.1-2: Initial conditions for NR SA FR2 event-triggered reporting with gap in non-DRX

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 17.6.1.3.4.1-3.

2. Message contents are defined in clause 17.6.1.3.4.3.

3. There is one NR carrier and two cells specified in the test. Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 17.6.1.3.4.1-3: General test parameters for NR SA FR2 event-triggered reporting with gap in non-DRX

Parameter	Unit	Value	Comment
Active cell		PCell (Cell 1)	
Neighbour cell		Cell 2	Cell to be identified.
RF Channel Number		1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Gap type		Per-UE gaps	
Measurement gap repetition periodicity	ms	40	
Measurement gap length	ms	6	
Measurement gap offset	ms	4	
SMTC configuration for CD-SSB		SMTC.1 RedCap	
SMTC configuration for NCD-SSB		SMTC.2 RedCap	
CSI-RS parameters		CSI-RS.3.2 TDD	
A3-Offset	dB	-11	
CP length		Normal	
Hysteresis	dB	0	
Time-To-Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
Time offset between Cell 1 and Cell 2	µs	3	Synchronous cells
T1	s	5	
T2	s	5	

17.6.1.3.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

1. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

2. Set the parameters according to T1 in Table 17.6.1.3.5-1.

3. Set NR Cell 2 physical cell identity = (current NR cell 2 physical cell identity + 3) mod 1008 for current iteration of the test procedure loop.

4. SS shall transmit an *RRCReconfiguration* message to configure RedCap-specific dedicated BWP and Event A3 triggered reporting.

5. The UE shall transmit an *RRCReconfigurationComplete* message. T1 starts upon the SS receives the *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 17.6.1.3.5-1. T2 starts.

7. The SS increases the number of successful tests by one if the UE transmits a *MeasurementReport* message triggered by event A3 satisfying the overall delay requirement specified in clause 17.6.1.3.5, otherwise the SS increases the number of failure tests by one.

8. After the SS receive the *MeasurementReport* message in step 7) or when T2 expires, the SS shall:

   - transmit *RRCRelease* message to release the RRC connection which includes the release of the established radio bearers as well as all radio resources

   or

   - switch the UE off.

9. Depending on the choice in step 8, the SS shall,

   - transmit in NR Cell 1 a *Paging* message including matched ng-5G-S-TMSI for the UE if an *RRCRelease* has been sent in step 8. If the paging fails, switches off and on the UE,

   or

   - switch on the UE if the UE is switched off in step 8.

10. Ensure the UE is in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* and Test Mode *On* according to TS 38.508-1 [14] clause 4.5.

11. Repeat step 2-10 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

17.6.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 17.6.1.3.4.3-1: Common Exception messages for NR SA FR1 event-triggered reporting with gap in non-DRX

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition GAP NEEDED Table H.3.1-4 with A3-offset = -11dB Table H.3.1-6 with Condition gapUE, Pattern #0 and gapOffset is set to 4 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.1-8 with Condition CSI-RS RLM

Table 17.6.1.3.4.3-2: MeasObjectNR (Step 4, test procedure)

Derivation Path: Table H.3.1-3 with condition INTRA-FREQ MO, Synchronous cells			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR of NCD-SSB		
smtc1	SSB-MTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.2 RedCap		

cellsToAddModList SEQUENCE (SIZE (1..maxNrofCellMeas)) OF CellsToAddMod {	1 entry		
CellsToAddMod[1] SEQUENCE {		entry 1	
physCellId	PhysCellId of Cell 2		
cellIndividualOffset SEQUENCE {			
rsrpOffsetSSB	dB16		
rsrqOffsetSSB	Not present		
sinrOffsetSSB	Not present		
rsrpOffsetCSI-RS	Not present		
rsrqOffsetCSI-RS	Not present		
sinrOffsetCSI-RS	Not present		
}			
}			
}			
}			

Table 17.6.1.3.4.3-3: *ServingCellConfig* (step 4, test procedure)

Derivation Path: TS 38.508-1 [14] Table 4.6.3-167 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
downlinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Downlink {	1 entry		
BWP-Downlink[1]	BWP-Downlink	entry 1 Table 17.6.1.3.4.3-4	
}			
firstActiveDownlinkBWP-Id	1	Activate the RedCap-specific dedicated DL BWP	
uplinkConfig SEQUENCE {			
initialUplinkBWP	Not present		
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF BWP-Uplink {	1 entry		
BWP-Uplink[1]	BWP-Uplink	entry 1 Table 17.6.1.3.4.3-5	
}			
firstActiveUplinkBWP-Id	1	Activate the RedCap-specific dedicated UL BWP	
pusch-ServingCellConfig	Not present		
}			
}			
servingCellMO	Not present		
}			

Table 17.6.1.3.4.3-4: *BWP-Downlink* (Table 17.6.1.3.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-9			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Downlink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {			
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to DLBWP.1.3 RedCap		
}			
}			
bwp-Dedicated SEQUENCE {			
nonCellDefiningSSB-r17 SEQUENCE {			
absoluteFrequencySSB-r17	ARFCN-ValueNR of NCD-SSB		
ssb-Periodicity-r17	ms40		
ssb-TimeOffset-r17	Not present		
}			

servingCellMO-r17	MeasId		
}			
}			

Table 17.6.1.3.4.3-5: *BWP-Uplink* (Table 17.6.1.3.4.3-3)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-13			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-Uplink ::= SEQUENCE {			
bwp-Id	1		
bwp-Common SEQUENCE {	BWP-UplinkCommon		
genericParameters SEQUENCE {			
locationAndBandwidth	The RIV corresponds to ULBWP.1.3 RedCap		
}			
}			
}			

17.6.1.3.5 Test requirement

Table 17.6.1.3.4.1-3 and Table 17.6.1.3.5-1 define the primary level settings including test tolerances.

Table 17.6.1.3.5-1: NR Cell specific test parameters

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated	Config 1		24		24	
	Config 2		48		48	
Initial BWP configuration			DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated DL BWP configuration			DLBWP.1.3 RedCap Note 1		DLBWP.1.3 RedCap Note 1	
Dedicated UL BWP configuration			ULBWP.1.3 RedCap Note 2		ULBWP.1.3 RedCap Note 2	
RLM-RS			CSI-RS		SSB	
PDSCH RMC configuration	Config 1		SR.3.2 TDD		N/A	
	Config 2		SR.3.3 TDD			
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD		CR.3.1 TDD	
	Config 2		CR.3.2 TDD		CR.3.2 TDD	
Dedicated CORESET RMC configuration	Config 1		CCR.3.1 TDD		CCR.3.1 TDD	
	Config 2		CCR.3.7 TDD		CCR.3.7 TDD	
TRS configuration			TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states			TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing		kHz	120		120	
OCNG Patterns			OP.1		OP.1	
cellIndividualOffset		dB	N/A		16	
CD-SSB	Config 1		SSB.2 RedCap FR2		SSB.2 RedCap FR2	
	Config 2		SSB.4 RedCap FR2		SSB.4 RedCap FR2	
NCD-SSB	Config 1		SSB.3 RedCap FR2		SSB.3 RedCap FR2	
	Config 2		SSB.5 RedCap FR2		SSB.5 RedCap FR2	
Propagation Condition			No external noise (Note 3)			

Note 1: The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dedicated DL BWP2 corresponding to NCD-SSB PRB index;

Note 2: The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.

Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

Table 17.6.1.3.5-2: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup			Setup 3 defined in A.9			
			AoA1		AoA2	
Beam Assumption Note 4			Rough		Rough	
E_s	Config 1	dBm/ SCS	-89	-89	-Infinity	-89
	Config 2		-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB Note 5		dB	-0.12	-0.12	-Infinity	-0.12
SSB_RP	Config 1	dBm/ SCS	-89	-89	-Infinity	-89
	Config 2		-86	-86	-Infinity	86
Io	Config 1	dBm/ 95.04MHz	-64.41	-64.41	-Infinity	-64.41
	Config 2		-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure 17.6.1.3.5-1			

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

The overall delay is measured from the beginning of time period T2 to the time that the SS receives the first *MeasurementReport* message triggered by event A3. It is allowed to be up to $2xTTI_{DCCH}$ higher than the measurement reporting delay specified in 38.133[6] clause 9.2B.4 due to the TTI insertion uncertainty of the measurement report in DCCH.

Then the overall delay shall be shall be no larger than: $T_{identify_intra_without_index} + 2xTTI_{DCCH}$, where

- $T_{identify_intra_without_index}$ = 3200 ms for UE supporting power class 1 or 5 and 1920 ms for UE supporting power class 2, 3, 4 or 7, is the time for intra-frequency cell identification specified in 38.133 [6] clause 9.2B.5.1,

- TTI_{DCCH} = 1 ms.

Which gives a total of 3202 ms for UE supporting power class 1 or 5 and 1922 ms for UE supporting power class 2, 3, 4 or 7.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

For the test to pass, the total number of successful tests shall be more than 90% of the cases with a confidence level of 95%.

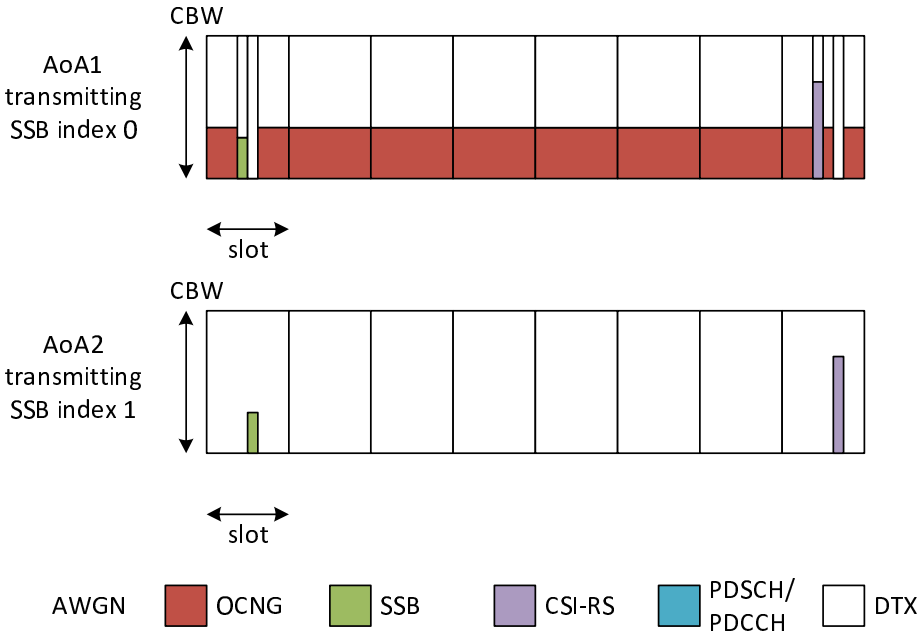

Figure 17.6.1.3.5-1: Time multiplexed downlink transmissions (Config 1 example)

17.6.1.4 NR SA FR2 event triggered reporting with gap in DRX for 2 Rx UE

Editor's Note:

This test case is complete for the following configurations:

- UE PC3
- Test frequencies f ≤ 40.8 GHz;

This test case is incomplete for UE power classes other than PC3;

- This test case is incomplete for test frequencies f > 40.8 GHz.

17.6.1.4.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in TS 38.133 [6] clause 9.2B.6.1 and 9.2B.6.2

17.6.1.4.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards supporting CSI-RS based RLM, BWP operation without bandwidth restriction and long DRX cycle.

17.6.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.1.0.1 and 17.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.1.4.

17.6.1.4.4 Test description

17.6.1.4.4.1 Initial conditions

Same as the initial conditions given in clause 7.6.1.4.4.1 with following exceptions:

- Table 7.6.1.4.4.1-1 is replaced by Table 17.6.1.4.4.1-1.
- Table 7.6.1.4.4.1-2 is replaced by Table 17.6.1.4.4.1-2.
- Table 7.6.1.4.4.1-3 is replaced by Table 17.6.1.4.4.1-3.

Table 17.6.1.4.4.1-1: Supported test configurations

Test Case ID	Description
17.6.1.4-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
17.6.1.4-2	240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table 17.6.1.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.6.1.4.4.1-3: General test parameters

Parameter	Unit	Value		Comment
		Test 1	Test 2	
Active cell		PCell (Cell 1)		
Neighbour cell		Cell 2		Cell to be identified.
RF Channel Number		1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
Gap type		Per-UE gaps		
Measurement gap repetition periodicity	ms	40		
Measurement gap length	ms	6		
Measurement gap offset	ms	39		
SMTC configuration		SMTC.1		
CSI-RS parameters		CSI-RS.3.2 TDD		
A3-Offset	dB	-7		
CP length		Normal		
Hysteresis	dB	0		
Time To Trigger	s	0		
Filter coefficient		0		L3 filtering is not used
DRX		DRX.1	DRX.7	
Time offset between Cell 1 and Cell 2		3 μs		Synchronous cells
T1	s	5		
T2	s	10	52	

17.6.1.4.4.2 Test procedure

Same as the test procedure given in clause 7.6.1.4.4.2 with following exceptions:

- Step 6 in clause 7.6.1.4.4.2 is replaced by:

6. UE shall transmit a *MeasurementReport* message triggered by Event A3. If the overall delays measured from the beginning of time period T2 is less than X ms for Test 1 or less than Y ms for Test 2 then the number of

successful tests is increased by one. If the UE fails to report the event within the overall delays measured requirement then the number of failure tests is increased by one. Where X and Y is

- X = 7202, Y = 51202 for UE supporting power class 1 or 5,
- X = 4322, Y = 30722 for UE supporting power class 2, 3, 4 or 7,

17.6.1.4.4.3 Message contents

Same as the message contents given in clause 7.6.1.4.4.3.

17.6.1.4.5 Test requirement

Same as the test requirements given in clause 7.6.1.4.5 with following exceptions:

- Table 7.6.1.4.5-1 is replaced by Table 17.6.1.4.5-1.
- Table 7.6.1.4.5-2 is replaced by Table 17.6.1.4.5-2.
- In Test 1 the overall delay measured shall be less than a total of X ms, where
  - X = 7202 for UE supporting power class 1 or 5,
  - X = 4322 for UE supporting power class 2, 3, 4 or 7.
- In Test 2 the overall delay measured shall be less than a total of X ms, where
  - X = 51202 for UE supporting power class 1 or 5,
  - X = 30722 for UE supporting power class 2, 3, 4 or 7.

Table 17.6.1.4.5-1: NR Cell specific test parameters

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration			TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			66		66	
Initial BWP configuration			DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration			DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration			ULBWP.1.2		ULBWP.1.1	
RLM-RS			CSI-RS		SSB	
PDSCH RMC configuration	Config 1		SR.3.2 TDD		N/A	
	Config 2		SR.3.3 TDD			
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD		N/A	
	Config 2		CR.3.2 TDD			
Dedicated CORESET RMC configuration	Config 1		CCR.3.1 TDD		N/A	
	Config 2		CCR.3.7 TDD			
TRS configuration			TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing		kHz	120		120	
OCNG Patterns			OP.1		OP.1	
SSB	Config 1		SSB.3 FR2		SSB.3 FR2	
	Config 2		SSB.4 FR2		SSB.4 FR2	
Propagation Condition			AWGN			

Table 17.6.1.4.5-2: NR OTA Cell specific test parameters

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
AoA setup		Setup 1 defined in A.9.1			
Beam Assumption[Note 4]		Rough			
$\hat{E}_s / I_{ot}$ BB [Note 5]	dB	3.51	-1.60	-Infinity	-1.60

N_{oc} Note 2		dBm/ 15 KHz	-101.5			
N_{oc} Note 2	Config 1	dBm/SCS	-92.5			
	Config 2		-89.5			
SSB_RPSS-RSRP	Config 1	dBm/SCS	-88.50	-88.50	-Infinity	-88.50
	Config 2		-85.50	-88.50	-Infinity	-88.50
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	4
Io		dBm/ 95.04MHz	-58.03	-55.68	-58.03	-55.68

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in TS 38.133 [6] clause B.2.1.3, and does not limit UE implementation or test system implementation
Note 5: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

17.6.2 Inter-frequency measurements for RedCap

17.6.2.0 Minimum conformance requirements

The requirements in clause 17.6.2.0 apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- For 2 Rx RedCap UE:
  - SS-RSRP related side conditions given in 38.133 [6] clauses 10.1.4 and 10.1.5 for FR1 and FR2, respectively, for a corresponding Band,
  - SS-RSRQ related side conditions given in 38.133 [6] clauses 10.1.9 and 10.1.10 for FR1 and FR2, respectively, for a corresponding Band,
  - SS-SINR related side conditions given in clauses 38.133 [6] 10.1.14 and 10.1.15 for FR1 and FR2, respectively, for a corresponding Band,
  - SSB_RP and SSB Ês/Iot according to 38.133 [6] Annex B.2.3 for a corresponding Band.

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index_RedCap}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{identify_inter_without_index_RedCap}$.

$$T_{identify_inter_without_index_RedCap} = (T_{PSS/SSS_sync_inter_RedCap} + T_{SSB_measurement_period_inter_RedCap})\ ms$$

$$T_{identify_inter_with_index_RedCap} = (T_{PSS/SSS_sync_inter_RedCap} + T_{SSB_measurement_period_inter_RedCap} + T_{SSB_time_index_inter_RedCap})\ ms$$

Where:

$T_{PSS/SSS_sync_inter_RedCap}$: it is the time period used in PSS/SSS detection given in table 17.6.2.0-1.

$T_{SSB_time_index_inter_RedCap}$: it is the time period used to acquire the index of the SSB being measured given in table 17.6.2.0-2.

$T_{SSB_measurement_period_inter_RedCap}$: equal to a measurement period of SSB based measurement given in table , table 17.6.2.0-3, table .

For 2 Rx RedCap UE:

$M_{pss/sss_sync_inter_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{pss/sss_sync_inter_RedCap}$ = 64 samples. For a UE supporting FR2 power class 2, 3, 4 or 7, $M_{pss/sss_sync_inter_RedCap}$ = 40 samples.

$M_{SSB_index_inter_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{SSB_index_inter_RedCap}$ = 40 samples. For a UE supporting FR2 power class 2, 3,4 or 7, $M_{SSB_index_inter_RedCap}$ = 24 samples.

$M_{meas_period_inter_RedCap}$: For a UE supporting FR2 power class 1 or 5, $M_{meas_period_inter_RedCap}$ =64 samples. For a UE supporting FR2 power class 2, 3, 4 or 7, $M_{meas_period_inter_RedCap}$ =40 samples.

$CSSF_{inter_RedCap}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_gap_RedCap,i}$ in clause 9.1A.5.2 for measurement conducted within measurement gaps.

Table 17.6.2.0-1: Time period for PSS/SSS detection, (Frequency range FR2) for 2Rx RedCap UE

Condition NOTE1	$T_{PSS/SSS_sync_inter_RedCap}$
No DRX	$Max(600ms, M_{pss/sss_sync_inter_RedCap} \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(600ms, (1.5 \times M_{pss/sss_sync_inter_RedCap}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$M_{pss/sss_sync_inter_RedCap} \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 17.6.2.0-2: Time period for time index detection (Frequency range FR2) for 2Rx RedCap UE

Condition NOTE1	$T_{SSB_time_index_inter_RedCap}$
No DRX	$Max(200ms, M_{SSB_index_inter_RedCap} \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(200ms, (1.5 \times M_{SSB_index_inter_RedCap}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$M_{SSB_index_inter_RedCap} \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

When measurement gaps are provided for inter frequency measurements, the RedCap UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in TS 38.133 [6] clauses 10.1A.4, 10.1A.5, 10.1A.8, 10.1A.9, 10.1A.12 and 10.1A.13, respectively, as shown in table 17.6.2.0-3.

Table 17.6.2.0-3: Measurement period for inter-frequency measurements with gaps (Frequency FR2) for 2Rx RedCap UE

Condition NOTE1	$T_{SSB_measurement_period_inter_RedCap}$
No DRX	$Max(400ms, M_{meas_period_inter_RedCap} \times Max(MGRP, SMTC\ period)) \times CSSF_{inter_RedCap}$
DRX cycle ≤ 320ms	$Max(400ms, (1.5 \times M_{meas_period_inter_RedCap}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times CSSF_{inter_RedCap}$
DRX cycle > 320ms	$M_{meas_period_inter_RedCap} \times DRX\ cycle \times CSSF_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

For 2 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in TS 38.133 [6] clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{identify_inter_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index_RedCap}$. Both $T_{identify_inter_without_index_RedCap}$ and $T_{identify_inter_with_index_RedCap}$ are defined in TS 38.133 [6] clause 9.3B.4. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{identify_inter_without_index_RedCap}$ or $T_{identify_inter_with_index_RedCap}$ as defined in TS 38.133 [6] clause 9.3B.4 or 9.3B.7.1. If a cell which has been detectable at least for the time period $T_{identify\ inter\ without\ index_RedCap}$ or $T_{identify\ inter\ with\ index_RedCap}$ defined in TS 38.133 [6] clause 9.3B.4 or 9.3B.7.1 becomes undetectable for a period $\leq$ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_intra_RedCap}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu} T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

The normative reference for this requirement is TS 38.133 [6] clause 9.3B.2, 9.3B.4, 9.3B.5 and 9.3B.6.3.

17.6.2.1 NR SA FR2-FR2 event triggered reporting in non-DRX for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

Test frequency f ≤ 40.8 GHz

UE PC3

This test case is incomplete for UE power classes other than PC3 (e.g. PC7)

This test case is incomplete for test frequencies > 40.8 GHz

17.6.2.1.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements for RedCap in 38.133 [6] clause 9.3B.4.

17.6.2.1.2 Test applicability

This test applies to all types of NR RedCap UE from release 17 onwards.

17.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.2.1.

17.6.2.1.4 Test description

17.6.2.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.6.1.2.4.1-1.

Table 17.6.2.1.4.1-1: Supported test configurations

Test Config	Description
17.6.2.1-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test requirement and the DUT according to the parameters in Table 17.6.1.2.4.1-2.

Table 17.6.2.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.

Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell and neighbour cell are given in Table 17.6.2.1.4.1-3 below.
2. Message contents are defined in clause 17.6.2.1.4.3.
3. There are two cells on 2 different carriers specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 17.6.2.1.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause TS 38.133 [6] 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-CD-SSB parameters		Config 1	SSB.2 RedCap FR2	
NCD-SSB parameters		Config 1	SSB.3 RedCap FR2	
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5.2 for PC1; 3.5 for other PC	

17.6.2.1.4.2 Test procedure

Same as the test procedure given in clause 7.6.2.1.4.2.

17.6.2.1.4.3 Message contents

Same as the message contents given in clause 7.6.2.1.4.3.

17.6.2.1.5 Test requirement

Same as the test requirements given in clause 7.6.2.1.5 with following exceptions:

- Table 7.6.2.1.5-1 is replaced by Table 17.6.2.1.5-1.

Table 17.6.2.1.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption[Note 7]			1,2	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
	Dedicated DL BWP configuration			DLBWP.1.3 RedCap Note 9		N/A	
	Dedicated UL BWP configuration			ULBWP.1.3 RedCap Note 10		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2 for CD-SSB			Config 1	SMTC.1		SMTC.1	
SMTC configuration for NCD-SSB			Config 1	SMTC.2 RedCap		SMTC.2 RedCap	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							

$\hat{E}_S$	dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSBRP Note 3	dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s/I_{ot}$ BB Note 8	dB	Config 1	1.89	1.89	-Infinity	1.89
Io Note3	dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1	No external noise (Note 11)		No external noise (Note 11)	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: VoidNote 3: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 9: The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dediacted DL BWP2 corresponding to NCD-SSB PRB index;
Note 10: The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.
Note 11: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

17.6.2.2 NR SA FR2-FR2 event triggered reporting in DRX for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

Test frequency f ≤ 40.8 GHz

UE PC3

This test case is incomplete for UE power classes other than PC3 (e.g. PC7)

This test case is incomplete for test frequencies > 40.8 GHz

17.6.2.2.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements for RedCap in 38.133 [6] clause 9.3B.4.

17.6.2.2.2 Test applicability

This test applies to all types of NR RedCap UE supporting long DRX cycle from release 17 onwards.

17.6.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.2.2.

17.6.2.2.4 Test description

17.6.2.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.6.2.2.4.1-1.

Table 17.6.2.2.4.1-1: Supported test configurations

Test Config	Description
17.6.2.2-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test requirement and the DUT according to the parameters in Table 17.6.2.2.4.1-2.

Table 17.6.2.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell and neighbour cell are given in Table 17.6.2.2.4.1-3 below.
2. Message contents are defined in clause 17.6.2.2.4.3.
3. There are two cells on 2 different carriers specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 17.6.2.2.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in TS 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		
A3-Offset	dB	Config 1	-12		Value modified by TT
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.7	As specified in TS 38.133 [6] clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

17.6.2.2.4.2 Test procedure

Same as the test procedure given in clause 7.6.2.2.4.2.

17.6.2.2.4.3 Message contents

Same as the message contents given in clause 7.6.2.2.4.3.

17.6.2.2.5 Test requirement

Same as the test requirements given in clause 7.6.2.1.5 with following exceptions:

- Table 7.6.2.1.5-1 is replaced by Table 17.6.2.2.5-1.

Table 17.6.2.2.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							

N_{oc} Note2	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$	dB	Config 1	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1	AWGN		AWGN	
Antenna Configuration		Config 1	1x2		1x2	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

17.6.2.3 NR SA FR2-FR2 event triggered reporting with SSB time index detection in non-DRX for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

Test frequency f ≤ 40.8 GHz

UE PC3

This test case is incomplete for UE power classes other than PC3 (e.g. PC7)

This test case is incomplete for test frequencies > 40.8 GHz

17.6.2.3.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements for RedCap in 38.133 [6] clause 9.3B.4.

17.6.2.3.2 Test applicability

This test applies to all types of NR RedCap UE from release 17 onwards.

17.6.2.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.2.3.

17.6.2.3.4 Test description

17.6.2.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.6.1.2.4.1-1.

Table 17.6.2.3.4.1-1: Supported test configurations

Test Config	Description
17.6.2.3-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test requirement and the DUT according to the parameters in Table 17.6.1.2.4.1-2.

Table 17.6.2.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell and neighbour cell are given in Table 17.6.2.3.4.1-3 below.

2. Message contents are defined in clause 17.6.2.3.4.3.

3. There are two cells on 2 different carriers specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 17.6.2.3.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.

T1	s	Config 1	5	
T2	s	Config 1	7 for PC1; 4.5 for other PC	

17.6.2.3.4.2 Test procedure

Same as the test procedure given in clause 7.6.2.3.4.2.

17.6.2.3.4.3 Message contents

Same as the message contents given in clause 7.6.2.3.4.3.

17.6.2.3.5 Test requirement

Same as the test requirements given in clause 7.6.2.3.5 with following exceptions:

- Table 7.6.2.3.5-1 is replaced by Table 17.6.2.3.5-1.

Table 17.6.2.3.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption[Note 7]			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS							
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							

EPRE ratio of PDCCH to PDCCH DMRS		Config 1	0		0	
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/SCS	Config 1	-87	-87	-Infinity	-87
SSBRP Note 3	dBm/SCS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ BB Note 8	dB	Config 1	1.89	1.89	-Infinity	1.89
Io Note3	dBm/95.04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1	No external noise (Note 9)		No external noise (Note 9)	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Void
Note 3: SBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

17.6.2.4 NR SA FR2-FR2 event triggered reporting with SSB time index detection in DRX for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

Test frequency f ≤ 40.8 GHz

UE PC3

This test case is incomplete for UE power classes other than PC3 (e.g. PC7)

This test case is incomplete for test frequencies > 40.8 GHz

17.6.2.4.1 Test purpose

To verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements for RedCap in 38.133 [6] clause 9.3B.4.

17.6.2.4.2 Test applicability

This test applies to all types of NR RedCap UE from release 17 onwards.

17.6.2.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.2.4.

17.6.2.4.4 Test description

17.6.2.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.6.1.2.4.1-1.

Table 17.6.2.4.4.1-1: Supported test configurations

Test Config	Description
17.6.2.4-1	120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Configure the test requirement and the DUT according to the parameters in Table 17.6.1.2.4.1-2.

Table 17.6.2.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. The test parameters for PCell and neighbour cell are given in Table 17.6.2.4.4.1-3 below.
2. Message contents are defined in clause 17.6.2.4.4.3.
3. There are two cells on 2 different carriers specified in the test. NR Cell 1 is the cell used for connection setup with the power level set according to Annex C.1.1 and C.1.2 for this test.

Table 17.6.2.4.4.1-3: General test parameters

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		
A3-Offset	dB	Config 1	-12		Value modified by TT
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		

Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

17.6.2.4.4.2 Test procedure

Same as the test procedure given in clause 7.6.2.4.4.2.

17.6.2.4.4.3 Message contents

Same as the message contents given in clause 7.6.2.4.4.3.

17.6.2.4.5 Test requirement

Same as the test requirements given in clause 7.6.2.4.5 with following exceptions:

- Table 7.6.2.4.5-1 is replaced by Table 17.6.2.4.5-1.

Table 17.6.2.4.5-1: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption[Note 7]			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
$BW_{channel}$		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: $N_{RB,c}$ = 66		100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS							

EPRE ratio of PBCH DMRS to SSS		Config 1	0		0	
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7		-95.7	
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$	dB	Config 1	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1	6	6	-Infinity	9
Io Note3	dBm/95.04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Void
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

17.6.3 L1-RSRP measurement for beam reporting for RedCap

17.6.3.0 Minimum conformance requirements for L1-RSRP measurement for beam reporting

17.6.3.0.1 Minimum conformance requirements for SSB-based L1-RSRP measurement for beam reporting

The minimum requirements given in 5.6.3.0.1 applies.

The normative reference for this requirement is TS 38.133 [6] clause 9.5B.1, 9.5B.2, 9.5B.3.1, 9.5B.4.1 and 9.5B.5.1.

17.6.3.0.2 Minimum conformance requirements for CSI-RS-based L1-RSRP measurement for beam reporting

The minimum requirements given in clause 5.6.3.0.2 applies.

The normative reference for this requirement is TS 38.133 [6] clauses 9.5B.1, 9.5B.2, 9.5B.3.3, 9.5B.4.2 and 9.5B.5.1.

17.6.3.1 NR SA FR2 SSB based L1-RSRP measurement in non-DRX for 2 Rx UE

Editor's Notes:

This test case has been completed for the following configurations:

- Test frequencies f ≤ 40.8 GHz
- UE PC3
- This test case is incomplete for UE power classes other than PC3
- This test case is incomplete for Test frequencies f > 40.8 GHz

17.6.3.1.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5B.4.1.

17.6.3.1.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards.

17.6.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.3.1.

17.6.3.1.4 Test description

17.6.3.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.6.3.1.4.1 with following exceptions:

- Table 7.6.3.1.4.1-1 is replaced by Table 17.6.3.1.4.1-1.
- Table 7.6.3.1.4.1-3 is replaced by Table 17.6.3.1.4.1-2.

Table 17.6.3.1.4.1-1: Supported test configurations

Test Case ID	Description
17.6.3.1.4.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
17.6.3.1.4.1-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.6.3.1.4.1-2: Test environment

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.	
Channel bandwidth	As specified by the test configuration selected from Table 17.5.2.3.4.1-1.	
Propagation conditions	AWGN	As specified in Annex C.2.2.

Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

17.6.3.1.4.2 Test procedure

Same as the test procedure given in clause 7.6.3.1.4.2.

17.6.3.1.4.3 Message contents

Same as the test procedure given in clause 7.6.3.1.4.3.

17.6.3.1.5 Test requirement

Same as the test requirements given in clause 7.6.3.1.5.

17.6.3.2 NR SA FR2 SSB based L1-RSRP measurement in DRX for 2 Rx UE

Editor's Notes:

This test case has been completed for the following configurations:

- Test frequencies f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for UE power classes other than PC3

This test case is incomplete for Test frequencies f > 40.8 GHz

17.6.3.2.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5B.4.1.

17.6.3.2.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards supporting long DRX cycle.

17.6.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.3.2.

17.6.3.2.4 Test description

17.6.3.2.4.1 Initial conditions

Same as the initial conditions given in 7.6.3.2.4.1 with following exceptions:

- Table 7.6.3.2.4.1-1 is replaced by Table 17.6.3.2.4.1-1.
- Table 7.6.3.2.4.1-3 is replaced by Table 17.6.3.2.4.1-2.
- Table 7.6.3.2.4.1-2 is replaced by Table 17.6.3.2.4.1-3.

Table 17.6.3.2.4.1-1: Supported test configurations

Test Config	Description

17.6.3.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
17.6.3.2-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.6.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.6.3.2.4.1-3: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1,2		freq1
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.3.1
$BW_{channel}$	1,2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1,2		66
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1,2		SMTC.1
TRS Configuration	1,2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1,2		TCI.State.2
DRX configuration	1,2		DRX.3
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	320
T1	1,2	s	5
T2	1,2	s	3
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation condition	1,2		AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

17.6.3.2.4.2 Test procedure

Same as the test procedure given in clause 7.6.3.2.4.2.

17.6.3.2.4.3 Message contents

Same as the message content given in 7.6.3.2.4.3.

17.6.3.2.5 Test requirement

Same as the test requirements given in clause 7.6.3.2.5 with following exceptions:

- Table 7.6.3.2.5-1 is replaced by Table 17.6.3.2.5-1.

Table 17.6.3.2.5-1: Cell specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.9			
Assumption for UE beams Note 4	1,2		Rough			
N_{oc} Note2	1,2	dBm/15kHz	-105			
N_{oc} Note2	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s / I_{ot}$	1,2	dB	0	0	-Infinity	9
SSB_RP Note3	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
Io Note3	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1,2	dB	0	0	-Infinity	9

Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: Information about types of UE beam is given in TS 38.133 Annex B.2.1.3, and does not limit UE implementation or test system implementation

17.6.3.3 NR SA FR2 CSI-RS based L1-RSRP measurement in non-DRX for 2 Rx UE

Editor's Notes:

This test case has been completed for the following configurations:

- Test frequencies f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for UE power classes other than PC3

This test case is incomplete for Test frequencies f > 40.8 GHz

17.6.3.3.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5B.4.2.

17.6.3.3.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards.

17.6.3.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.3.3.

17.6.3.3.4 Test description

17.6.3.3.4.1 Initial conditions

Same as the initial conditions given in 7.6.3.3.4.1 with following exceptions:

- Table 7.6.3.3.4.1-1 is replaced by Table 17.6.3.3.4.1-1.
- Table 7.6.3.3.4.1-3 is replaced by Table 17.6.3.3.4.1-2.
- Table 7.6.3.3.4.1-2 is replaced by Table 17.6.3.3.4.1-3.

Table 17.6.3.3.4.1-1: Supported test configurations

Test Config	Description
17.6.3.3-1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.6.3.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.3.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 17.6.3.3.4.1-3: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD

OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		Off
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		8
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

17.6.3.3.4.2 Test procedure

Same as the test procedure given in clause 7.6.3.3.4.2.

17.6.3.3.4.3 Message contents

Same as the message content given in 7.6.3.3.4.3.

17.6.3.3.5 Test requirement

Same as the test requirements given in clause 7.6.3.3.5 with following exceptions:

- Table 7.6.3.3.5-1 is replaced by Table 17.6.3.3.5-1.

Table 17.6.3.3.5-1: Cell specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.9	
Beam Assumption Note 3	1		Rough	Rough
N_{oc} Note1	1	dBm/15kHz	-105	
N_{oc} Note1	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP Note 2	1	dBm/SSB SCS	-95.97	-86.97
Io Note 2	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Note 3:	Information about types of UE beam is given in 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation

17.6.3.4 NR SA FR2 CSI-RS based L1-RSRP measurement in DRX for 2 Rx UE

Editor's Notes:

This test case has been completed for the following configurations:

- Test frequencies f ≤ 40.8 GHz
- UE PC3

This test case is incomplete for UE power classes other than PC3

This test case is incomplete for Test frequencies f > 40.8 GHz

17.6.3.4.1 Test purpose

To verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in TS 38.133 [6] clause 9.5B.4.2.

17.6.3.4.2 Test applicability

This test applies to all types of NR RedCap UEs from Release 17 onwards supporting long DRX cycle.

17.6.3.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.3.4.

17.6.3.4.4 Test description

17.6.3.4.4.1 Initial conditions

Same as the initial conditions given in 7.6.3.4.4.1 with following exceptions:

- Table 7.6.3.4.4.1-1 is replaced by Table 17.6.3.4.4.1-1.
- Table 7.6.3.4.4.1-3 is replaced by Table 17.6.3.4.4.1-2.
- Table 7.6.3.4.4.1-2 is replaced by Table 17.6.3.4.4.1-3.

Table 17.6.3.4.4.1-1: Supported test configurations

Test Config	Description
17.6.3.4-1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.6.3.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.3.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	

Exceptions to connection diagram	N/A	

Table 17.6.3.4.4.1-3: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		DRX.3
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1		8
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

17.6.3.4.4.2 Test procedure

Same as the test procedure given in clause 7.6.3.4.4.2.

17.6.3.4.4.3 Message contents

Same as the message content given in 7.6.3.4.4.3.

17.6.3.4.5 Test requirement

Same as the test requirements given in clause 7.6.3.4.5 with following exceptions:

- Table 7.6.3.4.5-1 is replaced by Table 17.6.3.4.5-1.

Table 17.6.3.4.5-1: Cell specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.9	
Beam Assumption Note 3	1		Rough	Rough
N_{oc} Note1	1	dBm/15kHz	-105	
N_{oc} Note1	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP Note 2	1	dBm/SSB SCS	-95.97	-86.97
Io Note 2	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Information about types of UE beam is given in 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation

17.6.4 NR Measurements with autonomous gaps for RedCap

17.6.4.0 Minimum conformance requirements

17.6.4.0.1 Minimum conformance requirements for CGI identification of an NR cell with autonomous gaps

The UE shall identify and report the CGI of a known NR target cell when requested by the network for the purpose of reportCGI. Only one cell is provided to the UE with *cellForWhichToReportCGI* for identifying the CGI.The UE may make autonomous gaps in both downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3 of TS 38.331 [13]. Note that a UE is not required to use autonomous gap if *useAutonomousGaps* is set to false. If autonomous gaps are used for measurement with the purpose of reportCGI, regardless of whether DRX is used or not, the UE shall be able to identify a new CGI of NR cell within:

$$T_{identify_CGI_redcap} = (T_{MIB_redcap} + T_{SIB1_redcap})\ ms$$

Where:

T_{MIB_redcap} is the time period used to acquire MIB message. $T_{MIB_redcap} = 25 * T_{SMTC}$ ms for target cell carrier frequency on FR2.

T_{SIB1_redcap} is the time period used to acquire SIB1 message. $T_{SIB1_redcap} = 6 * T_{RMSI\text{-}scheduling}$ ms.

Where T_{SMTC} is the SMTC periodicity configured for the target cell measurement, and $T_{RMSI\text{-}scheduling}$ is

- the periodicity with which the SIB1 is actually transmitted by the NR target cell when SSB and RMSI CORESET multiplexing pattern is 1

- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and T_{SMTC} when SSB and RMSI CORESET multiplexing pattern is 2 or 3.The requirement for identifying the CGI of an NR cell within $T_{identify_CGI_redcap}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [13] is used.

In the requirement a cell is known if,

- During the last 5 seconds for FR1 or 3 seconds for FR2 before the reception of the report CGI command:
  - The UE has sent a valid L3-RSRP measurement report with SSB index for the target cell and

- During MIB decoding at least reported SSBs remains detectable according to the cell identification conditions specified in clauses 9.2B or 9.3B of TS 38.133 [6], and
- During SIB1 decoding the SSB used for MIB decoding remains detectable according to the cell identification conditions specified in clauses 9.2B or 9.3B of TS 38.133 [6], and
- During MIB decoding, the SSB for MIB decoding remains detectable with SNR $\geqslant$-3dB
- During SIB1 decoding, the PDSCH for SIB1 decoding remains detectable with SNR $\geqslant$-3dB

The CGI reporting delay is defined as the time between a command that will trigger a CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of 2 x TTI_{DCCH} resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{identify_CGI_redcap}$ plus RRC procedure delay defined in clause 12 in TS 38.331 [13], and additional 20ms margin if target cell is on FR2.

When a RedCap UE is identifying CGI of an NR cell with autonomous gaps, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on PCell for the following slots:

- with up to K1 interruptions with interrupted slots up to X1 specified in Table 17.6.4.0.1-1 for each interruption during MIB decoding time period T_{MIB_redcap} (ms).
- with up to L1 interruptions with interrupted slots up to Y1 specified in Table 17.6.4.0.1-1 during SIB1 decoding time period T_{SIB1_redcap} (ms) for SSB and CORESET for RMSI scheduling multiplexing patterns 1.
- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 17.6.4.0.1-1 during SIB1 decoding time period T_{SIB1_redcap} (ms) for SSB and CORESET for RMSI scheduling multiplexing patterns 2 and 3.

Where:

- K1 = 25 for the target cell carrier frequency on FR2, and
- L1 = T_{SIB1_redcap} /20 and
- L2 = T_{SIB1_redcap} /T_{SMTC}, where T_{SMTC} is the periodicity of the SMTC occasion configured for the target cell carrier.

Table 17.6.4.0.1-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
3	0.125	48	49	37

The normative reference for this requirement is TS 38.133 [6] clauses 9.11A.2, 9.11A.3 and 9.11A.4.

17.6.4.1 NR SA FR2-FR2 CGI identification of NR neighbour cell for 2 Rx UE

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is still missing.

17.6.4.1.1 Test purpose

To verify that the UE makes correct reporting of an CGI. This test will partly verify the SA inter-frequency NR cell search requirements in TS 38.133 [6] clause 9.11A.

17.6.4.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards supporting FR2 and acquisition of CGI from neighbour NR cell using autonomous gap.

17.6.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.6.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.6.4.1.

17.6.4.1.4 Test description

The test scenario comprises of two NR carriers and two NR cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2.

The test consists of three successive time periods, with time durations of T1 and T2 respectively:

- Measurement gap patterns are configured. During T1 the UE shall report event A3 for cell 2. Within 3 seconds of the event report, the test equipment shall add a measurement reporting configuration using *ReportConfigNR* which contains a *ReportCGI* IE with *cellForWhichToReportCGI* set to the physical Cell ID of cell 2 and including the optional IE *useAutonomousGaps-r16*.

- Time period T2 begins 10ms after the test equipment has transmitted the RRC reconfiguration message containing the *ReportCGI* IE.

17.6.4.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 17.6.4.1.4.1-1.

Table 17.6.4.1.4.1-1: Supported test configurations

Configuration	Description
17.6.4.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 17.6.4.1.4.1-2

Table 17.6.4.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.6.4.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 17.6.4.1.4.3.

2. The power levels and settings for NR PCell (Cell 1) and NR neighbour cell (Cell 2) are set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Table 16.3.1.3.4.1-3 below.

Table 17.6.4.1.4.1-3: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two FR2 NR carrier frequencies is used.

Active cell		NR Cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		NR Cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		13	As specified in clause 9.1.2-1.
Measurement gap offset		39	
SMTC-SSB parameters		SSB.3 FR2	As specified in clause A.3.10.2
SI-RNTI scheduling rate	ms	20	S-RNTI scheduled on 8 occasions per 160ms transmission period
A3-Offset	dB	-15	
Hysteresis	dB	0	
CP length		Normal	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	DRX is not used
Time offset between serving and neighbour cells		3µs	Synchronous cells.
T1	s	<10	UE expected to report event A3 for cell 2 within 5,2s (PC1)or 3.5s (other PC) of the start of T1. Test equipment shall configure CGI reporting within 3s after receiving the event A3 report. T2 begins 10ms after test equipment has transmitted the RRC reconfiguration to configure CGI reporting.
T2	s	1	

17.6.4.1.4.2 Test procedure

Throughout the test, the UE shall be scheduled to perform DL reception on every slot suitable for DL.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.

2. Set the parameters according to T1 in Table 17.6.4.1.5-1 and Table 17.6.4.1.5-2. T1 starts.

3. The SS transmits an *RRCReconfiguration* message to configure event A3 triggered measurement reporting on NR Cell 2.

4. The UE transmits an *RRCReconfigurationComplete* message.

5. UE transmits a *MeasurementReport* message triggered by Event A3.

6. Within 3 seconds after receiving *MeasurementReport* message in step 6, the SS transmits an *RRCReconfiguration* message to configure an autonomous gap based CGI measurement reporting on NR Cell 2.

7. The start of T2 is the instant 10ms after the last TTI containing the *RRCReconfiguration* message in step 7 is sent to the UE, at that instant the SS shall switch the power setting from T1 to T2 as specified in Table 17.6.4.1.5-1 and 17.6.4.1.5-2.

8. If the UE

   a) transmits a *MeasurementReport* message containing CGI of NR Cell 2 less than 645 ms from the beginning of time period T2, and

   b) has missed no more than 1240 ACK/NACKs from the start of T2 until 645 ms,

   then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

9. Set Cell 2 physical cell identity = ((current Cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.

10. Repeat step 2-11 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

17.6.4.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 17.6.4.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-7 with condition INTER-FREQ for test procedure step 6

Table 17.6.4.1.4.3-2: MeasConfig (Step 3 & 8, test procedure)

Derivation path: Table H.3.1-2 with condition INTER-FREQ			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfig[1] CHOICE {			
reportConfigNR	ReportConfigNR-DEFAULT(-15) specified in Table H.3.1-4	A3-Offset is set to -30 Acutal threshold = -30*0.5 = -15dB	Step 3
	ReportConfigNR-CGI	Table 17.6.4.1.4.3-3	Step 8
}			
}			
measGapConfig	MeasGapConfig-DEFAULT specified in Table H.3.1-6 with condition gapUE and Pattern #13		Step 3
measGapConfig SEQUENCE {			Step 8
gapUE CHOICE {			
release	null	MG needs to be released to avoid interfering with the missed ACK/NACK count	
}			
}			
}			

Table 17.6.4.1.4.3-3: ReportConfigNR-CGI (Table 17.6.4.1.4.3-2)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition CGI			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
reportCGI SEQUENCE {			
cellForWhichToReportCGI	PhysCellId of NR Cell 2		
useAutonomousGaps-r16	setup		
}			
}			
}			

Table 17.6.4.1.4.3-4: MeasResults (Step 10, test procedure)

Derivation Path: TS 38.508-1 [14], Table 4.6.3-79			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResults ::= SEQUENCE {			
measResultServingMOList	Not checked		
measResultNeighCells CHOICE {			
measResultListNR SEQUENCE (SIZE (1..maxCellReport)) OF MeasResultNR {	1 entry		
MeasResultNR [1] SEQUENCE {		Entry 1	
physCellId	PhysCellId of NR Cell 2		
measResult	Not checked		
cgi-Info	Checked		
}			
}			
}			
}			

17.6.4.1.5 Test requirements

Table 17.6.4.1.4.1-3 and Table 17.6.4.1.5-1 define the primary level settings including test tolerances for the test.

Table 17.6.4.1.5-1: NR Cell specific test parameters

Parameter		**Unit**	**Cell 1**		**Cell 2**	
			T1	**T2**	**T1**	**T2**
AoA setup			Setup 3 as specified in clause A.3.15			
			AoA1		AoA2	
Beam Assumption[Note 7]			Rough			
NR RF Channel Number			1		2	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66			
BWP BW		MHz	100: $N_{RB,c}$ = 66			
BWP configuration	Initial DL BWP		DLBWP.0.1		N/A	
	Initial UL BWP		ULBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Dedicated UL BWP		ULBWP.1.1			
OCNG Patterns			OP.1		Not sent	
PDSCH RMC			SR.3.1 TDD		-	
CORESET RMC			CR.3.1 TDD		-	
SMTC configuration			SMTC.1			
PDSCH/PDCCH subcarrier spacing		kHz	120			
TRS configuration			TRS.2.1 TDD		N/A	
TCI configuration			CSI-RS.Config.0		N/A	
EPRE ratio of PSS to SSS			0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS[Note 1]						
EPRE ratio of OCNG to OCNG DMRS [Note 1]						
N_{oc} [Note2]		dBm/15kHz [Note5]	-99.03+TT		-99.03+TT	
N_{oc} [Note2]		dBm/SCS [Note4]	-90+TT		-90+TT	

SS-RSRP Note 3	dBm/SCS Note5	-87+TT	-93+TT
$\hat{E}_s/I_{ot}$	dB	3+TT	-3+TT
$\hat{E}_s/N_{oc}$	dB	3+TT	-3+TT
Io Note3	dBm/95.04 MHz Note5	-56.25+TT	-59.25+TT
Propagation Condition		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone

Note 7: Information about types of UE beam is given in TS 38.133 [6] B.2.1.3, and does not limit UE implementation or test system implementation

The UE shall transmit a measurement report containing the cell global identifier of Cell 2 within overall delay from the start of T2, where the overall delay is calculated as follows,

Overall delay = RRC procedure delay + $T_{identify_CGI_RedCap}$ + additional margin for FR2 + TTI insertion uncertainty

- RRC procedure delay = 10ms, is the RRC procedure delay specified in 38.331 clause 12;
- $T_{identify_CGI_RedCap} = T_{MIB_redcap} + T_{SIB1_redcap}$
  - T_{MIB_redcap} = 500 ms, is the time period used to acquire MIB message;
  - T_{SIB1_redcap} = 120 ms, is the time period used to acquire SIB1 message;
- TTI insertion uncertainty = 2 x TTI_{DCCH} = 2ms, is the delay uncertainty when inserting the measurement report to the TTI of the uplink DCCH;
- additional margin for FR2 = 20 ms, is specified in 38.133 [6] clause 9.11A.3

Which gives overall delay = 10+ 500 + 120 + 20 + 2 = 652 ms, allow 655 ms.

From the start of T2 until 655 ms. The number of missed ACK/NACK shall be no more than the maximum number of missed ACK/NACK given in Table 17.6.4.1.5-2.

The rate of correct events observed during repeated tests shall be at least 90%.

Table 17.6.4.1.5-2: Maximum number of missed ACK/NACKs during the overall delay

Test config.	Maximum number of missed ACK/NACKs
1	1240 Note 1

NOTE 1: The overall missed ACK/NACK number is caused by two parts. Firstly, up to 25 interruptions, each has a length of up to 48 slots, are allowed during T_{MIB_redcap} as specified in 38.133 [6] Table 9.11A.4-1. Secondly, up to 6 interruptions, each has a length of up to 49 slots are allowed during T_{SIB1_redcap} as specified in 38.133 [6] Table 9.11A.4-1 assuming SSB/CORESET0 multiplxing pattern #0. In worst case, they will cause up to ceil(48/5)*4*25 + ceil(49/5)*4*6 = 1240 missed ACK/NACKs (assuming TDDConf.3.1 is used).

17.7 Measurement performance requirements for RedCap

17.7.1 SS-RSRP for RedCap

17.7.1.0 Minimum conformance requirements

17.7.1.0.1 Intra-frequency SS-RSRP measurement accuracy requirements

Same as in clause 5.7.1.0.1.

17.7.1.0.2 Inter-frequency SS-RSRP measurement accuracy requirements

Same as in clause 5.7.1.0.2.

17.7.1.1 NR SA FR2 SS-RSRP measurement accuracy for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

17.7.1.1.1 Test purpose

To verify that the intra-frequency SS-RSRP measurement accuracy is within the specified limits for all bands.

17.7.1.1.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.7.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.7.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.7.1.1.

17.7.1.1.4 Test description

Same as the test description given in clause 7.7.1.1.4.

17.7.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.7.1.1.4.1 with following exceptions:

- Table 7.7.1.1.4.1-1 is replaced by Table 17.7.1.1.4.1-1;
- Table 7.7.1.1.4.1-2 is replaced by Table 17.7.1.1.4.1-2;

Table 17.7.1.1.4.1-1: Supported test configurations

Configuration	Description
17.7.1.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.7.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.7.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

17.7.1.1.4.2 Test procedure

Same as the test procedure given in clause 7.7.1.1.4.2 with following exceptions:

- Table 7.7.1.1.5-1 is replaced by Table 17.7.1.1.5-1;
- Table 7.7.1.1.5-2 is replaced by Table 17.7.1.1.5-2;
- Table 7.7.1.1.5-3 is replaced by Table 17.7.1.1.5-3;
- Table 7.7.1.1.5-3a is replaced by Table 17.7.1.1.5-4;
- Table 7.7.1.1.5-4 is replaced by Table 17.7.1.1.5-5;
- Table 7.7.1.1.5-5 is replaced by Table 17.7.1.1.5-6;

17.7.1.1.4.3 Message contents

Same as the message contents given in clause 7.7.1.1.4.3.

17.7.1.1.5 Test requirement

Same as the test requirements given in clause 7.7.1.1.5 with followings exceptions:

- Table 7.7.1.1.5-1 is replaced by Table 17.7.1.1.5-1;
- Table 7.7.1.1.5-2 is replaced by Table 17.7.1.1.5-2;
- Table 7.7.1.1.5-3 is replaced by Table 17.7.1.1.5-3;
- Table 7.7.1.1.5-3a is replaced by Table 17.7.1.1.5-4;
- Table 7.7.1.1.5-4 is replaced by Table 17.7.1.1.5-5;
- Table 7.7.1.1.5-5 is replaced by Table 17.7.1.1.5-6;

Table 17.7.1.1.5-1: Cell-specific test parameters

Parameter	Unit	Cell 1	Cell 2
Cell ID		489	0
SSB ARFCN		freq1	
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		24	
Downlink initial BWP configuration		DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-

DRX cycle configuration		N/A	-
TRS configuration		TRS.2.1 TDD	-
TCI state		TCI.State.0	-
PDSCH Reference measurement channel		SR.3. 2TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-
Dedicated CORESET Reference channel		CCR.3.1 TDD	-
OCNG Patterns		OP.3	
SSB configuration		SSB.3 FR2	
SMTC configuration		SMTC.1	
Time offset with Cell 1	μs	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Propagation conditions		AWGN	
Antenna configuration		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table 17.7.1.1.5-2: OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.9.1			
Assumption for UE beams Note 5		Rough			
N_{oc} Note1	dBm/15kHz Note3	-97.4		N/A	
N_{oc} Note1	dBm/SCS Note3	-88.37		N/A	
$\hat{E}_s / N_{oc}$	dB	6.0	1.4	N/A	N/A
Es	dBm/SCS Note3			(Table B.2.2-2 Rx Beam Peak +9.8dB)	(Table B.2.2-2 Rx Beam Peak +9.8dB)
SSB_RP Note2	dBm/SCS	-82.37	-86.97	(Table B.2.2-2 Rx Beam Peak +9.8dB)	(Table B.2.2-2 Rx Beam Peak +9.8dB)
$\hat{E}_s / I_{ot}$ BB Note4	dB	2.20	-5.59	-1.77	-1.77
Io Note2	dBm/95.04 MHz Note3	-55.74		(Table B.2.2-2 Rx Beam Peak +37.40dB)	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 4 Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 17.7.1.1.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	50	n257, n258, n261	31
		n260	33
		n259	FFS
Highest reported value (Cell 1)	108	n257, n258, n261	88
		n260	90
		n259	FFS
Lowest reported value (Cell 2)	46	n257, n258, n261	31
		n260	33
		n259	FFS
Highest reported value (Cell 2)	103	n257, n258, n261	88
		n260	90
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS
Highest reported value (Cell 1)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS
Lowest reported value (Cell 2)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS
Highest reported value (Cell 2)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS

Table 17.7.1.1.5-4: evaluation limits for the Δ(Max-Min) reported values for each cell during each time period

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 1	16	16
Δ(Max-Min) reported value Cell 2	16	16
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value Cell 1	FFS	FFS
Δ(Max-Min) reported value Cell 2	FFS	FFS

Table 17.7.1.1.5-5: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 2 – Cell 1)	- 12	- 6

Highest reported value (Cell 2 – Cell 1)	+ 2	+ 6
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 2 – Cell 1)	FFS	FFS
Highest reported value (Cell 2 – Cell 1)	FFS	FFS

Table 17.7.1.1.5-6: evaluation limits for the reported values for T2 with respect to T1 relative accuracy rules R7, R8

UE power class 3			
Test 2	**Bands**	**Normal Conditions**	**Extreme Conditions**
Lowest reported value (Cell 1 T2 – Cell 1 T1)	n257, n258, n261	- 28	FFS
	n260	- 26	FFS
	n259	FFS	FFS
Highest reported value (Cell 1 T2 – Cell 2 T1)	n257, n258, n261	- 12	FFS
	n260	- 10	FFS
	n259	FFS	FFS
Lowest reported value (Cell 2 T2 – Cell 2 T1)	n257, n258, n261	- 24	FFS
	n260	- 21	FFS
	n259	FFS	FFS
Highest reported value (Cell 2 T2 – Cell 2 T1)	n257, n258, n261	- 8	FFS
	n260	- 5	FFS
	n259	FFS	FFS

17.7.1.2 NR SA FR2-FR2 SS-RSRP measurement accuracy for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz

- The test is incomplete for extreme conditions17.7.1.2.1 Test purpose

To verify that the inter-frequency SS-RSRP measurement accuracy is within the specified limits for all bands.

17.7.1.2.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.7.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.7.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.7.1.2.

17.7.1.2.4 Test description

Same as the test description given in clause 7.7.1.2.4.

17.7.1.2.4.1 Initial conditions

Same as the initial conditions given in clause 7.7.1.2.4.1 with following exceptions:

- Table 7.7.1.2.4.1-1 is replaced by Table 17.7.1.2.4.1-1;
- Table 7.7.1.2.4.1-2 is replaced by Table 17.7.1.2.4.1-2;

Table 17.7.1.2.4.1-1: Supported test configurations

Configuration	Description
17.7.1.2-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
17.7.1.2-2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.7.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.7.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

17.7.1.2.4.2 Test procedure

Same as the test procedure given in clause 7.7.1.1.4.2 with following exceptions:

- Table 7.7.1.2.5-1 is replaced by Table 17.7.1.2.5-1;
- Table 7.7.1.2.5-2 is replaced by Table 17.7.1.2.5-2;
- Table 7.7.1.2.5-3 is replaced by Table 17.7.1.2.5-3;
- Table 7.7.1.2.5-3a is replaced by Table 17.7.1.2.5-4;
- Table 7.7.1.2.5-4 is replaced by Table 17.7.1.2.5-5;
- Table 7.7.1.2.5-5 is replaced by Table 17.7.1.2.5-6;

17.7.1.2.4.3 Message contents

Same as the message contents given in clause 7.7.1.2.4.3.

17.7.1.2.5 Test requirement

Same as the test requirements given in clause 7.7.1.2.5 with followings exceptions:

- Table 7.7.1.2.5-1 is replaced by Table 17.7.1.2.5-1;
- Table 7.7.1.2.5-2 is replaced by Table 17.7.1.2.5-2;
- Table 7.7.1.2.5-3 is replaced by Table 17.7.1.2.5-3;
- Table 7.7.1.2.5-3a is replaced by Table 17.7.1.2.5-4;
- Table 7.7.1.2.5-4 is replaced by Table 17.7.1.2.5-5;
- Table 7.7.1.2.5-5 is replaced by Table 17.7.1.2.5-6;

Table 17.7.1.2.5-1: Cell-specific test parameters

Parameter		Unit	Cell 1	Cell 2
SSB ARFCN			freq1	freq2
BWchannel		MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated	Config 1		24	
	Config 2		48	
Gap pattern ID			0	
Duplex mode			TDD	
TDD configuration			TDDConf.3.1	
PDSCH Reference measurement channel	Config 1		SR.3.2 TDD	-
	Config 2		SR.3.3 TDD	-
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	-
	Config 2		CR.3.2 TDD	-
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD	-
	Config 2		CCR.3.7 TDD	-
SSB configuration	Config 1		SSB.3 FR2	
	Config 2		SSB.4 FR2	
PDSCH/PDCCH subcarrier spacing		kHz	120	
OCNG Patterns			OP.3	
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration			DLBWP.1.3 ULBWP.1.3	
TRS Configuration			TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration			TCI.State.2	
SMTC configuration			SMTC.1	
Time offset between Cell 2 and Cell 1		µs	3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition			AWGN	
Antenna configuration			1x2	
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table 17.7.1.2.5-2: OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	1~2		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
			AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams Note 7	1~2		Rough		Rough	
N_{oc} Note1	1	dBm/15kHz Note4	-96.3	-96.3	(Table B.2.3-2 Rx Beam Peak Note 8 -4.63dB)	(Table B.2.3-2 Rx Beam Peak Note 8 -3.03dB)
	2		-99.3	-99.3		
N_{oc} Note1	1	dBm/SCS Note4	-87.3	-87.3	(Table B.2.3-2 Rx Beam Peak Note 8 +4.4dB)	(Table B.2.3-2 Rx Beam Peak Note 8 +6.0dB)
	2		-87.3	-87.3	(Table B.2.3-2	(Table B.2.3-2

					Rx Beam Peak[Note 8] +7.4dB)	Rx Beam Peak[Note 8] +9.0dB)
$\hat{E}_s / N_{oc}$	1~2	dB	6.0	6.0	17.0	1.0
SSB_RP[Note2]	1	dBm/SCS	-81.3	-81.3	(Table B.2.3-2 Rx Beam Peak[Note 8] +21.4dB)	(Table B.2. 3-2 Rx Beam Peak[Note 8] +24.47.0dB)
	2		-81.3	-81.3	(Table B.2.3-2 Rx Beam Peak[Note 8] +24.4dB)	(Table B.2. 3-2 Rx Beam Peak[Note 8] +10.0dB)
($SSB_RP_{Cell\ 1}$ – $SSB_RP_{Cell\ 2}$)	1~2	dB	00+TT		14.40	
$\hat{E}_s / I_{ot\ BB}$[Note6]	1	dB	5.23	5.93	5.38	-1.46
	2		4.58	5.87		
Io[Note2]	1	dBm/95.04 MHz [Note4]	-55.70	-55.70	(Table B.2.3-2 Rx Beam Peak[Note 8] +46.08dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] +35.13dB)
	2		-55.7	-55.7	(Table B.2.3-2 Rx Beam Peak[Note 8] +49.09dB)	(Table B.2.3-2 Rx Beam Peak[Note 8] +38.14dB)
($Io_{freq\ 1}$ – $Io_{freq\ 2}$)	1~2	dB	0		11.95	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SSB_RP, Es/Iot, Io, ($SSB_RP_{Cell\ 2}$ – $SSB_RP_{Cell\ 1}$) and ($Io_{freq\ 2}$ – $Io_{freq\ 1}$) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Void

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: Void

Note 6: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P or ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 8: The value in Table B.2.3-2 is the Minimum SSB_RP for SCS_{SSB} = 120 kHz, selected according to the operating band of Cell 2 and UE power class, without $\Delta MB_{P,n}$ adjustment.

Table 17.7.1.2.5-3: evaluation limits for the reported values for Test 1 and Test 2 absolute accuracy rules R1, R2, R4, R5 for test configuration 1

UE power class 3				
Normal Conditions	**Test 1 All bands**	**Test 2**		
Lowest reported value (Cell 1)	n257, n258, n261	41	n257, n258, n261	33
	n260	39	n260	34
	n259	FFS	n259	FFS
Highest reported value (Cell 1)	All bands: 109	n257, n258, n261		101
		n260		104
		n259		FFS
Lowest reported value (Cell 2)		n257, n258, n261		32

	All bands: 52	n260	34
		n259	FFS
Highest reported value (Cell 2)	All bands: 109	n257, n258, n261	87
		n260	90
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (Cell 1)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS
Highest reported value (Cell 1)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS
Lowest reported value (Cell 2)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS
Highest reported value (Cell 2)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS

Table 17.7.1.2.5-4: evaluation limits for the ∆(Max-Min) reported values for Cell 2 during each time period

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
∆(Max-Min) reported value Cell 2	16	16
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
∆(Max-Min) reported value Cell 2	16+TT	16+TT

Table 17.7.1.2.5-5: evaluation limits for the reported values for Test 1 and Test 2 absolute accuracy rules R1, R2, R4, R5 for test configuration 2

UE power class 3					
Normal Conditions	**Test 1 All bands**	**Test 2**			
Lowest reported value (Cell 1)	n257, n258, n261	41	n257, n258, n261	36	
	n260	39	n260	37	
	n259	FFS	n259	FFS	
Highest reported value (Cell 1)	All bands: 109	n257, n258, n261		104	
		n260		107	
		n259		FFS	
Lowest reported value (Cell 2)	All bands: 52	n257, n258, n261		35	
		n260		37	
		n259		FFS	
Highest reported value (Cell 2)	All bands: 109	n257, n258, n261		90	
		n260		93	
		n259		FFS	
Extreme Conditions	**Test 1 All bands**	**Test 2**			
Lowest reported value (Cell 1)	FFS	n257, n258, n261		FFS	
		n260		FFS	
		n259		FFS	
Highest reported value (Cell 1)	FFS	n257, n258, n261		FFS	
		n260		FFS	
		n259		FFS	
Lowest reported value (Cell 2)	FFS	n257, n258, n261		FFS	
		n260		FFS	
		n259		FFS	
Highest reported value (Cell 2)	FFS	n257, n258, n261		FFS	

		n260	FFS
		n259	FFS

Table 17.7.1.2.5-6: evaluation limits for the reported values for Test 1 and Test 2 relative accuracy rules R3, R6

UE power class 3				
Normal Conditions	**Test 1**		**Test 2 All bands**	
Lowest value (RSRP report Cell 2 – RSRP report Cell 1)	All bands: -23		-37	
Highest value (RSRP report Cell 2 – RSRP report Cell 1)	n257, n258, n261	+26	n257, n258, n261	+17
	n260	+27	n260	+19S
	n259	FFS	n259	FFS
Extreme Conditions	**Test 1**		**Test 2 All bands**	
Lowest value (RSRP report Cell 2 – RSRP report Cell 1)	FFS		FFS	
Highest value (RSRP report Cell 2 – RSRP report Cell 1)	n257, n258, n261	FFS	n257, n258, n261	FFS
	n260	FFS	n260	FFS
	n259	FFS	n259	FFS

17.7.2 SS-RSRQ for RedCap

17.7.2.0 Minimum conformance requirements

17.7.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements

Same as in clause 5.7.1.0.1.

17.7.2.0.2 Inter-frequency SS-RSRQ measurement accuracy requirements

Same as in clause 5.7.1.0.2.

17.7.2.1 NR SA FR2 SS-RSRQ measurement accuracy for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions17.7.2.1.1 Test purpose

To verify that the intra-frequency SS-RSRQ measurement accuracy is within the specified limits for all bands.

17.7.2.1.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.7.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.7.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.7.2.1.

17.7.2.1.4 Test description

Same as the test description given in clause 7.7.2.1.4.

17.7.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.7.2.1.4.1 with following exceptions:

- Table 7.7.2.1.4.1-1 is replaced by Table 17.7.2.1.4.1-1;
- Table 7.7.2.1.4.1-2 is replaced by Table 17.7.2.1.4.1-2;

Table 17.7.2.1.4.1-1: Supported test configurations

Configuration	Description
17.7.2.1-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.7.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.7.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

17.7.2.1.4.2 Test procedure

Same as the test procedure given in clause 7.7.2.1.4.2 with following exceptions:

- Table 7.7.2.1.5-1 is replaced by Table 17.7.2.1.5-1;
- Table 7.7.2.1.5-2 is replaced by Table 17.7.2.1.5-2;
- Table 7.7.2.1.5-3 is replaced by Table 17.7.2.1.5-3;

17.7.2.1.4.3 Message contents

Same as the message contents given in clause 7.7.2.1.4.3.

17.7.2.1.5 Test requirement

Same as the test requirements given in clause 7.7.2.1.5 with followings exceptions:

- Table 7.7.2.1.5-1 is replaced by Table 17.7.2.1.5-1;
- Table 7.7.2.1.5-2 is replaced by Table 17.7.2.1.5-2;
- Table 7.7.2.1.5-3 is replaced by Table 17.7.2.1.5-3;

Table 17.7.2.1.5-1: Cell-specific test parameters

Parameter	Unit	Cell 1	Cell 2
SSB ARFCN		Freq1	
Duplex mode		TDD	

TDD configuration			TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated			66	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
TRS configuration			TRS.2.1 TDD	-
TCI state			TCI.State.0	-
PDSCH Reference measurement channel			SR.3.1 TDD	-
RMSI CORESET Reference Channel			CR.3.1 TDD	-
Control channel RMC			CCR.3.1 TDD	-
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
SSB configuration			SSB.1 FR2	
PDSCH/PDCCH subcarrier spacing		kHz	120	
SS-RSSI-Measurement			Not Applicable	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
Propagation condition			AWGN	
Antenna configuration			1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table 17.7.2.1.5-2: OTA related test parameters

	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.9.1			
Assumption for UE beams Note 6		Rough			
N_{oc} Note1	dBm/15kHz Note4	-100.7		-96.7	
N_{oc} Note1	dBm/SCS Note3	-91.67		-87.67	
$\hat{E}_s / N_{oc}$	dB	3		-3	
SSB_RP Note2	dBm/SCS Note4	-88.67	-88.67	-90.67	-90.67
SS-RSRQ Note2	dB	-14.81	-14.81	-16.84	-16.84
$\hat{E}_s / I_{ot}$	dB	-1.76	-1.76	-4.76	-4.76
Io Note2	dBm/95.04 MHz Note4	-55.7		-55.67	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone					

Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 17.7.2.1.5-3: SS-RSRQ Intra frequency absolute accuracy requirements for the reported values

UE Power Class 3	Test 1 (All bands)	Test 2	
Normal Conditions			
Lowest reported value (Cell 2)	SS-RSRQ_41	n257, n258, n261	SS-RSRQ_35
		n260	SS-RSRQ_34
		n259	FFS
Highest reported value (Cell 2)	SS-RSRQ_73	All bands	SS-RSRQ_71
Extreme Conditions			
Lowest reported value (Cell 2)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS
Highest reported value (Cell 2)	FFS	All bands	FFS

17.7.2.2 NR SA FR2-FR2 SS-RSRQ measurement accuracy for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

17.7.2.2.1 Test purpose

To verify that the inter-frequency SS-RSRP measurement accuracy is within the specified limits for all bands.

17.7.2.2.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.7.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.7.2.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.7.2.2.

17.7.2.2.4 Test description

Same as the test description given in clause 7.7.2.2.4.

17.7.2.2.4.1 Initial conditions

Same as the initial conditions given in clause 7.7.2.2.4.1 with following exceptions:

- Table 7.7.2.2.4.1-1 is replaced by Table 17.7.2.2.4.1-1;
- Table 7.7.2.2.4.1-2 is replaced by Table 17.7.2.2.4.1-2;

Table 17.7.2.2.4.1-1: Supported test configurations

Configuration	Description
17.7.2.2-1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.7.2.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.15-1 and TS 38.508-1 [14] clause 4.3.1 and 4.4.2.		
Channel bandwidth	As specified by the test configuration selected from Table 17.7.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.3.4.1	
Exceptions to connection diagram	N/A		

17.7.2.2.4.2 Test procedure

Same as the test procedure given in clause 7.7.2.2.4.2 with following exceptions:

- Table 7.7.2.2.5-1 is replaced by Table 17.7.2.2.5-1;
- Table 7.7.2.2.5-2 is replaced by Table 17.7.2.2.5-2;
- Table 7.7.2.2.5-3 is replaced by Table 17.7.2.2.5-3;
- Table 7.7.2.2.5-4 is replaced by Table 17.7.2.2.5-4.

17.7.2.2.4.3 Message contents

Same as the message contents given in clause 7.7.2.2.4.3.

17.7.2.2.5 Test requirement

Same as the test requirements given in clause 7.7.2.2.5 with followings exceptions:

- Table 7.7.2.2.5-1 is replaced by Table 17.7.2.2.5-1;
- Table 7.7.2.2.5-2 is replaced by Table 17.7.2.2.5-2;
- Table 7.7.2.2.5-3 is replaced by Table 17.7.2.2.5-3;
- Table 7.7.2.2.5-4 is replaced by Table 17.7.2.2.5-4.

Table 17.7.2.2.5-1: Cell-specific test parameters

Parameter		Unit	Cell 1	Cell 2
SSB ARFCN			Freq1	Freq2
SSB Configuration			SSB.1 FR2	
Duplex mode			TDD	
TDD configuration			TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
TRS configuration			TRS.2.1 TDD	-
TCI state			TCI.State.0	-
Data RBs allocated			66	
PDSCH Reference measurement channel			SR.3.1 TDD	-
RMSI CORESET Reference Channel			CR.3.1 TDD	-
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	120	
EPRE ratio of PSS to SSS				

EPRE ratio of PBCH_DMRS to SSS	dB	0
EPRE ratio of PBCH to PBCH_DMRS		
EPRE ratio of PDCCH_DMRS to SSS		
EPRE ratio of PDCCH to PDCCH_DMRS		
EPRE ratio of PDSCH_DMRS to SSS		
EPRE ratio of PDSCH to PDSCH_DMRS		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation conditions		AWGN
Antenna configuration		1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 17.7.2.2.5-2: OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		Setup 1 in clause A.9.1			
Assumption for UE beams Note 6		Rough			
N_{oc} Note1	dBm/15kHz Note4	-95.93	-95.93	-95.44	-95.44
N_{oc} Note1	dBm/SCS Note3	-86.9	-86.9	-86.41	-86.41
$\hat{E}_s / N_{oc}$	dB	-1.75		-3	
SSB_RP Note2	dBm/SCS Note4	-88.65	-88.65	-89.41	-89.41
SS-RSRQ Note2	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$	dB	-1.75	-1.75	-3	-3
Io Note2	dBm/95.04 MHz Note4	-55.7	-55.7	-55.7	-55.7
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone					
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

Table 17.7.2.2.5-3: evaluation limits for the reported values for Test 1 and Test 2 absolute accuracy rules R1, R2, R4, R5

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest reported value (Cell 1)	RSRQ_41	RSRQ_37
Highest reported value (Cell 1)	RSRQ_73	RSRQ_74
Lowest reported value (Cell 2)	RSRQ_41	RSRQ_37
Highest reported value (Cell 2)	RSRQ_73	RSRQ_74

Extreme Conditions	Test 1 All bands	Test 2 All bands
Lowest reported value (Cell 1)	FFS	FFS
Highest reported value (Cell 1)	FFS	FFS
Lowest reported value (Cell 2)	FFS	FFS
Highest reported value (Cell 2)	FFS	FFS

Table 17.7.2.2.5-4: evaluation limits for the reported values for Test 1 and Test 2 relative accuracy rules R3, R6

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest value (RSRQ report Cell 2 – RSRQ report Cell 1)	- 7	- 9
Highest value (RSRQ report Cell 2 – RSRQ report Cell 1)	+ 7	+ 9
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest value (RSRQ report Cell 2 – RSRQ report Cell 1)	FFS	FFS
Highest value (RSRQ report Cell 2 – RSRQ report Cell 1)	FFS	FFS

17.7.3 L1-RSRP measurement for beam reporting for RedCap

17.7.3.0 Minimum conformance requirements

17.7.3.0.1 SSB-based L1-RSRP absolute measurement accuracy requirements

Same as in clause 5.7.4.0.1.

17.7.3.0.2 SSB-based L1-RSRP relative measurement accuracy requirements

Same as in clause 5.7.4.0.2.

17.7.3.0.3 CSI-RS-based L1-RSRP absolute measurement accuracy requirements

Same as in clause 5.7.4.0.3.

17.7.3.0.4 CSI-RS-based L1-RSRP relative measurement accuracy requirements

Same as in clause 5.7.4.0.4.

17.7.3.1 NR SA FR2 SSB based L1-RSRP measurement accuracy for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3

- The test is incomplete for test frequencies > 40.8 GHz

- The test is incomplete for extreme conditions17.7.3.1.1 Test purpose

To verify that the SSB based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

17.7.3.1.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.7.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.7.3.0.1 and 17.7.3.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.7.3.1.

17.7.3.1.4 Test description

17.7.3.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.7.4.1.4.1 with following aspects:

- Table 7.7.4.1.4.1-1 is replaced by Table 17.7.3.1.4.1-1;
- Table 7.7.4.1.4.1-2 is replaced by Table 17.7.3.1.4.1-2;

Table 17.7.3.1.4.1-1: Supported test configurations

Test Case ID	Description
17.7.3.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
17.7.3.1-2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.7.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.7.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

17.7.3.1.4.2 Test procedure

Same as the test procedure given in clause 7.7.4.1.4.2 with following aspects:

- Table 7.7.4.1.5-1 is replaced by Table 17.7.3.1.5-1;
- Table 7.7.4.1.5-2 is replaced by Table 17.7.3.1.5-2;
- Table 7.7.4.1.5-3 is replaced by Table 17.7.3.1.5-3;
- Table 7.7.4.1.5-3a is replaced by Table 17.7.3.1.5-4;
- Table 7.7.4.1.5-3b is replaced by Table 17.7.3.1.5-5;

- Table 7.7.4.1.5-4 is replaced by Table 17.7.3.1.5-6;
- Table 7.7.4.1.5-5 is replaced by Table 17.7.3.1.5-7;

17.7.3.1.4.3 Message contents

Same as the message contents given in clause 7.7.4.1.4.3.

17.7.3.1.5 Test requirement

Same as the test requirements given in clause 7.7.4.1.5 with following aspects:

- Table 7.7.4.1.5-1 is replaced by Table 17.7.3.1.5-1;
- Table 7.7.4.1.5-2 is replaced by Table 17.7.3.1.5-2;
- Table 7.7.4.1.5-3 is replaced by Table 17.7.3.1.5-3;
- Table 7.7.4.1.5-3a is replaced by Table 17.7.3.1.5-4;
- Table 7.7.4.1.5-3b is replaced by Table 17.7.3.1.5-5;
- Table 7.7.4.1.5-4 is replaced by Table 17.7.3.1.5-6;
- Table 7.7.4.1.5-5 is replaced by Table 17.7.3.1.5-7;

Table 17.7.3.1.5-1: Cell-specific test parameters

Parameter	Config	Unit	Test 1 & Test 2
SSB GSCN	1,2		freq1
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.3.1
$BW_{channel}$	1,2	MHz	100: $N_{RB,c}$ = 66
Data RBs allocated	1,2		66
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.3 ULBWP.1.3
TRS Configuration	1,2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1,2		TCI.State.2
SMTC configuration	1,2		SMTC.1
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2		slot320
Propagation condition	1,2		AWGN
Antenna configuration			1x2
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS[Note 1]			
EPRE ratio of OCNG to OCNG DMRS [Note 1]			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Table 17.7.3.1.5-2: OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 [NOTE 2]	
			SSB0	SSB1	SSB0	SSB1
Angle of arrival configuration			Setup 1 according to A.9.1		Setup 1 according to A.9.1	
Assumption for UE beams[Note 3]			Rough		Rough	
N_{oc}	1~2	dBm/15 kHz	-104.1		n.a.	
N_{oc}	1	dBm/SSB SCS	-95.1			
	2		-92.1		n.a.	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-1.6	n.a.	
SSB_RP[Note1]	1	dBm/SCS	-85.1	-96.9	As in Table B.2.4-2+5.7	
	2		-78	-90	As in Table B.2.4-2+5.7	
Io[Note1]	1~2	dBm/ 95.04MHz	-55.67		SSB_RP+34.68	
$\hat{E}_s / N_{oc}$	1~2	dB	10	-1.6	n.a.	

Note 1: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 2: No additional noise is added by the test system in Test 2.

Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table 17.7.3.1.5-3: L1-RSRP absolute accuracy requirements for the reported values for test configurations 1 and 2 for the absolute accuracy rules R1, R3

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (SSB#0)	42	n257, n258, n261	27
		n260	30
		n259	FFS
Highest reported value (SSB#0)	101	n257, n258, n261	83
		n260	86
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (SSB#0)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS
Highest reported value (SSB#0)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS

Table 17.7.3.1.5-4: evaluation limits for the Δ(Max-Min) reported values for SSB#0 for rules R1

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0	FFS	FFS

Table 17.7.3.1.5-5: evaluation limits for the Δ(Max-Min) reported values for SSB#0 or SSB#1 for rules R3

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0 or SSB#1	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value SSB#0 or SSB#1	FFS	FFS

Table 17.7.3.1.5-6: L1-RSRP absolute accuracy requirements for the reported values for test configurations 3 and 4 for the absolute accuracy rules R1, R3

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value	45	n257, n258, n261	30
		n260	33
		n259	FFS
Highest reported value	104	n257, n258, n261	86
		n260	89
		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS
Highest reported value	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS

Table 17.7.3.1.5-7: evaluation limits for the reported values for T1 and T2 relative accuracy rules R2, R4

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest DIFF RSRP reported value	2	0
Highest DIFF RSRP reported value	9	4
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest DIFF RSRP reported value	FFS	FFS
Highest DIFF RSRP reported value	FFS	FFS

17.7.3.2 NR SA FR2 CSI-RS based L1-RSRP measurement accuracy for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

17.7.3.2.1 Test purpose

To verify that the CSI-RS based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

17.7.3.2.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards.

17.7.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.7.3.0.3 and 17.7.3.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.17.7.3.2.

17.7.3.2.4 Test description

17.7.3.2.4.1 Initial conditions

Same as the initial conditions given in clause 7.7.4.2.4.1 with following aspects:

- Table 7.7.4.2.4.1-1 is replaced by Table 17.7.3.2.4.1-1;
- Table 7.7.4.2.4.1-2 is replaced by Table 17.7.3.2.4.1-2;

Table 17.7.3.2.4.1-1: Supported test configurations

Test Case ID	Description
17.7.3.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.7.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 17.7.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.3.1.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

17.7.3.2.4.2 Test procedure

Same as the test procedure given in clause 7.7.4.2.4.2 with following aspects:

- Table 7.7.4.2.5-1 is replaced by Table 17.7.3.2.5-1;
- Table 7.7.4.2.5-2 is replaced by Table 17.7.3.2.5-2;
- Table 7.7.4.2.5-3 is replaced by Table 17.7.3.2.5-3;
- Table 7.7.4.2.5-3a is replaced by Table 17.7.3.2.5-4;
- Table 7.7.4.2.5-3b is replaced by Table 17.7.3.2.5-5;
- Table 7.7.4.2.5-4 is replaced by Table 17.7.3.2.5-6;

17.7.3.2.4.3 Message contents

Same as the message contents given in clause 7.7.4.2.4.3.

17.7.3.2.5 Test requirement

Same as the test requirements given in clause 7.7.4.2.5 with following aspects:

- Table 7.7.4.2.5-1 is replaced by Table 17.7.3.2.5-1;
- Table 7.7.4.2.5-2 is replaced by Table 17.7.3.2.5-2;
- Table 7.7.4.2.5-3 is replaced by Table 17.7.3.2.5-3;
- Table 7.7.4.2.5-3a is replaced by Table 17.7.3.2.5-4;
- Table 7.7.4.2.5-3b is replaced by Table 17.7.3.2.5-5;
- Table 7.7.4.2.5-4 is replaced by Table 17.7.3.2.5-6;

Table 17.7.3.2.5-1: Cell-specific test parameters

Parameter	Config	Unit	Test 1 & Test 2
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
$BW_{channel}$	1	MHz	100: $N_{RB,c}$ = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
SMTC configuration	1		SMTC.1
CSI-RS	1		CSI-RS.3.2 TDD
reportConfigType	1		periodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1		slot320

Propagation condition	1		AWGN
Antenna configuration	1		1x2
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS Note 1			
EPRE ratio of OCNG to OCNG DMRS Note 1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table 17.7.3.2.5-2: OTA related test parameters

Parameter	Unit	Test 1		Test 2 NOTE 3	
		CSI-RS0	CSI-RS1	CSI-RS0	CSI-RS1
Angle of arrival configuration		Setup 1 according to A.9.1		Setup 1 according to A.9.1	
Assumption for UE beams Note 4		Rough		Rough	
N_{oc}	dBm/ 15kHz	-104.10		n.a.	
N_{oc}	dBm/ SCS	-95.11		n.a. n.a.	
$\hat{E}_s / I_{ot}$	dB	10	-1.8		
CSI-RS-RSRP Note1	dBm/ SCS	-85.11	-96.93	As in Table B.2.4-2+5.7	
Io Note1	dBm/ 95.04MHz	-55.67		CSI-RS_RP+34.68	
$\hat{E}_s / N_{oc}$	dB	10	-1.82	n.a.	
Note 1: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

Table 17.7.3.2.5-3: L1-RSRP absolute accuracy requirements for the reported values for the absolute accuracy rules R1, R3

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (CSI-RS#0)	42	n257, n258, n261	27
		n260	30
		n259	FFS
Highest reported value (CSI-RS#0)	101	n257, n258, n261	83
		n260	86

		n259	FFS
Extreme Conditions	**Test 1 All bands**	**Test 2**	
Lowest reported value (CSI-RS#0)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS
Highest reported value (CSI-RS#0)	FFS	n257, n258, n261	FFS
		n260	FFS
		n259	FFS

Table 17.7.3.2.5-4: evaluation limits for the Δ(Max-Min) reported values for CSI-RS#0 for rules R1

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0	FFS	FFS

Table 17.7.3.2.5-5: evaluation limits for the Δ(Max-Min) reported values for CSI-RS#0 or CSI-RS#1 for rules R3

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0 or CSI-RS#1	18	18
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Δ(Max-Min) reported value CSI-RS#0 or CSI-RS#1	FFS	FFS

Table 17.7.3.2.5-6: evaluation limits for the reported values for Test 1 and Test 2 relative accuracy rules R2, R4

UE power class 3		
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest DIFF RSRP reported value	2	0
Highest DIFF RSRP reported value	9	4
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**
Lowest DIFF RSRP reported value	FFS	FFS
Highest DIFF RSRP reported value	FFS	FFS

17.7.4 SS-SINR for RedCap

17.7.4.0 Minimum conformance requirements

17.7.4.0.1 Intra-frequency SS-SINR measurement accuracy requirements

Same as in clause 5.7.3.0.1.

17.7.4.0.2 Inter-frequency SS-SINR measurement accuracy requirements

Same as in clause 5.7.3.0.2.

17.7.4.1 NR SA FR2 SS-SINR measurement accuracy for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions17.7.4.1.1 Test purpose

To verify that the intra-frequency SS-SINR measurement accuracy is within the specified limits for all bands.

17.7.4.1.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards and supporting SS-SINR measurements.

17.7.4.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.7.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.17.7.4.1.

17.7.4.1.4 Test description

Same as the test description given in clause 7.7.3.1.4.

17.7.4.1.4.1 Initial conditions

Same as the initial conditions given in clause 7.7.3.1.4.1 with following exceptions:

- Table 7.7.3.1.4.1-1 is replaced by Table 17.7.4.1.4.1-1;
- Table 7.7.3.1.4.1-2 is replaced by Table 17.7.4.1.4.1-2;

Table 17.7.4.1.4.1-1: Supported test configurations

Configuration	Description
17.7.4.1-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.7.4.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1

Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

17.7.4.1.4.2 Test procedure

Same as the test procedure given in clause 7.7.3.1.4.2 with following exceptions:

- Table 7.7.3.1.5-1 is replaced by Table 17.7.4.1.5-1;
- Table 7.7.3.1.5-2 is replaced by Table 17.7.4.1.5-2;
- Table 7.7.3.1.5-3 is replaced by Table 17.7.4.1.5-3;

17.7.4.1.4.3 Message contents

Same as the message contents given in clause 7.7.3.1.4.3.

17.7.4.1.5 Test requirement

Same as the test requirement given in clause 7.7.3.1.5 with following exceptions:

- Table 7.7.3.1.5-1 is replaced by Table 17.7.4.1.5-1;
- Table 7.7.3.1.5-2 is replaced by Table 17.7.4.1.5-2;
- Table 7.7.3.1.5-3 is replaced by Table 17.7.4.1.5-3;

Table 17.7.4.1.5-1: Cell-specific test parameters

Parameter	Unit	Cell 1	Cell 2
SSB ARFCN		Freq2	
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66	
Data RBs allocated		66	
Downlink initial BWP configuration		DLBWP.0.1	
Downlink dedicated BWP configuration		DLBWP.1.1	
Uplink initial BWP configuration		ULBWP.0.1	
Uplink dedicated BWP configuration		ULBWP.1.1	
DRX cycle configuration	ms	Not applicable	
TRS configuration		TRS.2.1 TDD	
TCI state		TCI.State.0	
PDSCH Reference measurement channel		SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-
Dedicated RMSI CORESET Reference Channel		CCR.3.1 TDD	-
OCNG Patterns		OP.1	
SMTC configuration		SMTC.1	
SSB configuration		SSB.1 FR2	
PDSCH/PDCCH subcarrier spacing	kHz	120	
SS-RSSI-Measurement		Not Applicable	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			

EPRE ratio of PDSCH to PDSCH_DMRS		
EPRE ratio of OCNG DMRS to SSS Note 1		
EPRE ratio of OCNG to OCNG DMRS Note 1		
Propagation conditions		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table 17.7.4.1.5-2: OTA related test parameters

Parameter		Unit	Test 1		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration			Setup 1 according to clause A.9.1		Setup 1 according to clause A.9.1	
Assumption for UE beams Note 6			Rough		Rough	
N_{oc} Note1		dBm/15kHz Note4	-105		-105	
N_{oc} Note1		dBm/SCS Note3	-96		-96	
$\hat{E}_s / N_{oc}$		dB	4.54	2.66	-3	
SSB_RP Note2		dBm/SCS Note4	-91.46	-93.34	-98.8	-98.8
SS-SINR Note2	n257, 258, n261		-0.18	-3.32	-4.95	-4.95
	n260	dB	-0.31	-3.42	-5.20	-5.20
	n259		-0.39	-3.48	-5.48	-5.48
$\hat{E}_s / I_{ot}$	n257, 258, n261		-0.18	-3.32	-4.95	-4.95
	n260	dB	-0.31	-3.42	-5.20	-5.20
	n259		-0.39	-3.48	-5.48	-5.48
Io Note2		dBm/95.04 MHz Note4	-59.43		-63.87	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2: SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

Table 17.7.4.1.5-3: SS-SINR Intra frequency absolute accuracy requirements for the reported values

UE Power Class 3	Test 1		Test 2	
Normal Conditions				
Lowest reported value (Cell 2)	n257, n258, n261	SS-SINR_22	All bands	SS-SINR_18
	n260	SS-SINR_21		
	n259	FFS		
Highest reported value (Cell 2)	All bands	SS-SINR_58	n257, n258, n261	SS-SINR_55
			n260	SS-SINR_54
			n259	FFS
Extreme Conditions				
Lowest reported value (Cell 2)	n257, n258, n261	FFS	All bands	FFS
	n260	FFS		
	n259	FFS		
Highest reported value (Cell 2)	All bands	FFS	n257, n258, n261	FFS
			n260	FFS
			n259	FFS

For the test to pass, the ratio of successful reported values in each test shall be more than 90% with a confidence level of 95%.

17.7.4.2 NR SA FR2-FR2 SS-SINR measurement accuracy for 2 Rx UE

Editor's Note: This test case has been completed for the following configurations:

- Test frequency f ≤ 40.8 GHz
- UE PC3
- Normal conditions
- The test is incomplete for UE power classes other than PC3
- The test is incomplete for test frequencies > 40.8 GHz
- The test is incomplete for extreme conditions

17.7.4.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-SINR measurement accuracy is within the specified limits for all bands.

17.7.4.2.2 Test applicability

This test applies to all types of NR RedCap UE from Release 17 onwards and supporting SS-SINR measurements.

17.7.4.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 17.7.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.17.7.4.2.

17.7.4.2.4 Test description

Same as the test description given in clause 7.7.3.2.4.

17.7.4.2.4.1 Initial conditions

Same as the initial conditions given in clause 7.7.3.2.4.1 with following exceptions:

- Table 7.7.3.2.4.1-1 is replaced by Table 17.7.4.2.4.1-1;
- Table 7.7.3.2.4.1-2 is replaced by Table 17.7.4.2.4.1-2;

Table 17.7.4.2.4.1-1: Supported test configurations

Configuration	Description
17.7.4.2-1	NR 120 kHz SSB SCS, 100 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 17.7.4.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC	As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.15-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the selected test configuration.	
Propagation conditions	AWGN	As specified in Annex C.2.1
Connection Diagram	TE Part: A.3.3.1.1 DUT Part: A.3.4.1.1	As specified in TS 38.508-1 [14] Annex A.
Exceptions to connection diagram	N/A	

17.7.4.2.4.2 Test procedure

Same as the test procedure given in clause 7.7.3.2.4.2 with following exceptions:

- Table 7.7.3.2.5-1 is replaced by Table 17.7.4.2.5-1;
- Table 7.7.3.2.5-2 is replaced by Table 17.7.4.2.5-2;
- Table 7.7.3.2.5-3 is replaced by Table 17.7.4.2.5-3;
- Table 7.7.3.2.5-4 is replaced by Table 17.7.4.2.5-4;

17.7.4.2.4.3 Message contents

Same as the message contents given in clause 7.7.3.2.4.3.

17.7.4.2.5 Test requirement

Same as the test requirement given in clause 7.7.3.2.5 with following exceptions:

- Table 7.7.3.2.5-1 is replaced by Table 17.7.4.2.5-1;
- Table 7.7.3.2.5-2 is replaced by Table 17.7.4.2.5-2;
- Table 7.7.3.2.5-3 is replaced by Table 17.7.4.2.5-3;
- Table 7.7.3.2.5-4 is replaced by Table 17.7.4.2.5-4;

Table 17.7.4.2.5-1: SS-SINR Inter frequency general test parameters

Parameter	Unit	Cell 1			Cell 2		
		Test 1	Test 2	Test 3	Test 1	Test 2	Test 3
SSB ARFCN		freq1			freq2		
Duplex mode		TDD					
TDD configuration		TDDConf.3.1					
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 66					
Data RBs allocated		66					
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD			-		
RMSI CORESET Reference Channel		CR.3.1 TDD			-		
OCNG Patterns		OP.1					
SMTC configuration		SMTC.1					
SSB configuration		SSB.3 FR2					
PDSCH/PDCCH subcarrier spacing	kHz	120					
EPRE ratio of PSS to SSS	dB	0					
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS Note 1							
EPRE ratio of OCNG to OCNG DMRS Note 1							
Propagation conditions		AWGN					
Antenna Configuration		1x2					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Table 17.7.4.2.5-2: SS-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1		Setup 1		Setup 1	
Assumption for UE beams Note 6		Rough		Rough		Rough	
N_{oc} Note1	dBm/15kHz Note4	-105	-105	-105.1	-105.1	-105	-105
N_{oc} Note1	dBm/SCS Note3	-96	-96	-96.1	-96.1	-96	-96
$\hat{E}_s / N_{oc}$	dB	-0.5	-0.5	11	11	-2.1	-2.1
SS-RSRP Note2	dBm/SCS Note4	-96.5	-96.5	-85.1	-85.1	-98.1	-98.1
SS-SINR Note2	dB	-0.5	-0.5	11	11	-2.1	-2.1
$\hat{E}_s / I_{ot}$	dB	-0.5	-0.5	11	11	-2.1	-2.1
Io Note2	dBm/95.04 MHz Note4	-69.3	-69.3	-55.75	-55.75	-64.9	-64.9

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2: SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6: Information about types of UE beam is given in B.2.1.3 of TS 38.133 [6], and does not limit UE implementation or test system implementation

Table 17.7.4.2.5-3: evaluation limits for the reported values for T1 and T2 absolute accuracy rules R1, R2, R4, R5

UE power class 3						
Normal Conditions	**Test 1 All bands**		**Test 2 All bands**		**Test 3 All bands**	
Lowest reported value (Cell 1)	SINR_27		SINR_48		n257, n258, n261	SINR_23
					n260	SINR_22
					n259	FFS
Highest reported value (Cell 1)	n257, n258, n261	SINR_62	n257, n258, n261	SINR_87	n257, n258, n261	SINR_60
	n260	SINR_61	n260	SINR_86	n260	SINR_59
	n259	FFS	n259	FFS	n259	FFS
Lowest reported value (Cell 2)	SINR_27		SINR_48		n257, n258, n261	SINR_23
					n260	SINR_22
					n259	FFS
Highest reported value (Cell 2)	n257, n258, n261	SINR_62	n257, n258, n261	SINR_87	n257, n258, n261	SINR_60
	n260	SINR_61	n260	SINR_86	n260	SINR_59
	n259	FFS	n259	FFS	n259	FFS
Extreme Conditions	**Test 1 All bands**		**Test 2 All bands**		**Test 3 All bands**	
Lowest reported value (Cell 1)	FFS		FFS		n257, n258, n261	FFS
					n260	FFS
					n259	FFS
Highest reported value (Cell 1)	n257, n258, n261	FFS	n257, n258, n261	FFS	n257, n258, n261	FFS
	n260	FFS	n260	FFS	n260	FFS
	n259	FFS	n259	FFS	n259	FFS
Lowest reported value (Cell 2)	FFS		FFS		n257, n258, n261	FFS
					n260	FFS
					n259	FFS
Highest reported value (Cell 2)	n257, n258, n261	FFS	n257, n258, n261	FFS	n257, n258, n261	SINR_60 + FFS
	n260	FFS	n260	FFS	n260	SINR_59 + FFS
	n259	FFS	n259	FFS	n259	FFS

Table 17.7.4.2.5-4: evaluation limits for the reported values for T1 and T2 relative accuracy rules R3, R6

UE power class 3			
Normal Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest value (SINR report Cell 2 – SINR report Cell 1)	- 8	- 17	- 9
Highest value (SINR report Cell 2 – SINR report Cell 1)	+ 8	+ 17	+ 9
Extreme Conditions	**Test 1 All bands**	**Test 2 All bands**	**Test 3 All bands**
Lowest value (SINR report Cell 2 – SINR report Cell 1)	FFS	FFS	FFS
Highest value (SINR report Cell 2 – SINR report Cell 1)	FFS	FFS	FFS

18 E-UTRA - NR inter-RAT with E-UTRA serving cell for RedCap

18.1 RRC_IDLE state mobility for RedCap

18.1.1 Inter-RAT cell re-selection for RedCap

18.1.1.0 Minimum conformance requirements

TBD

18.1.1.1 E-UTRA - NR SA FR1 E-UTRA cell re-selection to higher priority NR target Cell for 2 Rx UE

Editor's Note: This test case is incomplete in following aspects:

- Message contents are missing.
- Test procedure is TBD
- Test applicability is missing
- Cell mapping is missing

18.1.1.1.1 Test purpose

The purpose of this test is to verify the requirement for the E-UTRA - NR SA FR1 inter-RAT cell reselection for RedCap UEs. The requirements are specified in TS 38.133 [6] in clause TBD.

18.1.1.1.2 Test applicability

This test applies to all types of NR RedCap UE release 17 and forward.

18.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 18.1.1.0.x.

The normative reference for this requirement is TS 38.133 [6] clause A.18.1.1.1.

18.1.1.1.4 Test description

18.1.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 18.1.1.1.4.1-1.

Table 18.1.1.1.4.1-1: Supported test configurations for E-UTRA - NR SA FR1 E-UTRA Cell reselection to higher priority NR target Cell in FR1

Configuration	Description
18.1.1.1-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.1.1.1-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.1.1.1-3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.1.1.1-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.1.1.1-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.1.1.1-6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.1.1.1-7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
18.1.1.1-8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 18.1.1.1.4.1-2.

Table 18.1.1.1.4.1-2: Initial conditions for E-UTRA - NR SA FR1 E-UTRA Cell reselection to higher priority NR target Cell in FR1

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram	Without faders.		

1. The general test parameter settings are set up according to Table 18.1.1.1.4.1-3.
2. Message contents are defined in clause 18.1.1.1.4.3.
3. The test scenario comprises of 1 E-UTRA cell and 1 NR cell. E-UTRA cell 1 is already identified by the UE prior to the start of the test. Cell 2 is of higher priority than cell 1.

Table 18.1.1.1.4.1-3: General test parameters for E-UTRA - NR SA FR1 E-UTRA Cell reselection to higher priority NR target Cell in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE camps on cell 2 in the initial phase
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T1 end condition	Active cell			Cell1	During T1 period the UE reselects to cell 1
	Neighbour cell			Cell2	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T3
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
RF Channel Number			1, 2, 3, 4, 5, 6, 7, 8	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test
Time offset between cells			1, 4, 7, 8	3 ms	Asynchronous cells

		2, 5	3 µs	Synchronous cells
		3, 6	3 µs	Synchronous cells
Access Barring Information	-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length	s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
T1	s	1, 2, 3, 4, 5, 6, 7, 8	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6, 7, 8	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3, 4, 5, 6, 7, 8	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

18.1.1.1.4.2 Test procedure

TBD

18.1.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

TBD

18.1.1.1.5 Test requirement

Table 18.1.1.1.5-1 defines the primary level settings including test tolerances for NR – E-UTRA cell re-selection test case in AWGN for 2 Rx UE.

Table 18.1.1.1.5-1: NR cell 2 specific test parameters for E-UTRA - NR SA FR1 E-UTRA Cell reselection to higher priority NR target Cell in FR1

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 4, 7, 8	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH Reference measurement channel		1, 4, 7, 8	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1, 4, 7, 8	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
RMC CORESET Reference Channel		1, 4, 7, 8	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
OCNG Patterns		1, 2, 3, 4, 5, 6, 7, 8	OP.1		
SMTC configuration		1, 2, 3, 4, 5, 6, 7, 8	SMTC.1		
SSB configuration		1, 4, 7, 8	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.1 RedCap FR1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		

Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5, 7, 8	-140		
		3, 6	-137		
Pcompensation	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
$Qhyst_s$	dB	1, 2, 3, 4, 5, 6	0		
$Qoffset_{s,n}$	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6, 7, 8	SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4, 7, 8	-3.65	-infinity	13.55
		2, 5			
		3, 6			
N_{oc} Note2	dBm/SCS	1, 4, 7, 8	-99.90	-98	-98
		2, 5	-99.90	-98	-98
		3, 6	-96.90	-95	-95
N_{oc} Note2	dBm/15 kHz	1, 4, 7, 8	-99.90	-98	-98
		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 4, 7, 8	-3.65	-infinity	13.55
		2, 5			
		3, 6			
SS-RSRP Note3	dBm/SCS	1, 4, 7, 8	-103.55	-infinity	-84.45
		2, 5	-103.55	-infinity	-84.45
		3, 6	-100.54	-infinity	-81.44
Io	dBm/9.36 MHz	1, 4, 7, 8	-70.39	-70.05	-56.31
	dBm/9.36 MHz	2, 5	-70.39	-70.05	-56.31
	dBm/18.36 MHz	3, 6	-67.46	-67.12	-53.38
Treselection	s	1, 2, 3, 4, 5, 6, 7, 8	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
$Thresh_{x,highP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	48		
$Thresh_{serving,lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	44		
$Thresh_{x,lowP}$	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table 18.1.1.1.5-2: E-UTRA cell 1 specific test parameters for E-UTRA - NR SA FR1 E-UTRA Cell reselection to higher priority NR target Cell in FR1

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
$BW_{channel}$	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 FDD for test configuration 1, 2, 3, 7; OP.2 TDD for test configuration 4, 5, 6, 8		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			

SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc} Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 KHz	-84	-84	-82.45
$\hat{E}_s / I_{ot}$	dB	14	14	15.55
$\hat{E}_s / N_{oc}$	dB	14	14	15.55
$Treselection_{EUTRAN}$	S	0		
SnonintrasearchP	dB	50		
$Thresh_{x, highP}$	dB	48		
$Thresh_{serving, lowP}$	dB	44		
$Thresh_{x, lowP}$	dB	50		
Propagation Condition		AWGN		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The cell reselection delay to a higher priority NR cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate, NR} + T_{SI-NR,}$ and to a lower priority cell can be expressed as: $T_{evaluate, NR} + T_{SI-NR,}$

The rate of correct events observed during repeated tests shall be at least 90% with the confidence level of 95%.

18.2 RRC_CONNECTED state mobility for RedCap

18.2.1 Handover for RedCap

18.2.1.0 Minimum conformance requirements

Then minimum requirements given in clause 16.3.1.0.2 apply.

The normative reference for this requirement is TS 36.133 [23] clause 5.3.4B.

18.2.1.1 E-UTRA - NR SA FR1 handover for 2 Rx UE

18.2.1.1.1 Test purpose

To verify the E-UTRAN to NR FR1 handover requirements for 2RX RedCap as specified in TS 36.133 [23] clause 5.3.4B.

18.2.1.1.2 Test applicability

This test applies to all E-UTRA UE from release 17 onwards and capable of NR RedCap with 2Rx.

18.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are defined in clause 18.2.1.0

The normative reference for this requirement is TS 38.133 [6] clause A.18.2.1.1.

18.2.1.1.4 Test description

Same as the test description given in clause 8.3.1.1.4.

18.2.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 8.3.1.1.4.1 with following exceptions:

- Table 8.3.1.1.4.1-1 is replaced by Table 18.2.1.1.4.1-1.
- Table 8.3.1.1.4.1-2 is replaced by Table 18.2.1.1.4.1-2.
- Table 8.3.1.1.4.1-3 is replaced by Table 18.2.1.1.4.1-3.

Table 18.2.1.1.4.1-1: Supported test configurations

Configuration	Description
18.2.1.1-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.2.1.1-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.2.1.1-3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.2.1.1-4	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
18.2.1.1-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.2.1.1-6	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.2.1.1-7	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.2.1.1-8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table 18.2.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.6-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 18.2.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.1
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 18.2.1.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	E-UTRAN cell
	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	

b2-Threshold1	dBm	-83	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2NR	dBm	As specified in Table 18.2.1.1.5-2	Absolute NR SS-RSRP threshold for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 8.1.2.1-1 started before T2 starts [23]
T1	s	5	
T2	s	≤5	
T3	s	1	

18.2.1.1.4.2 Test procedure

Same as the test procedure given in clause 8.3.1.1.4.2.

18.2.1.1.4.3 Message contents

Same as the message contents given in clause 8.3.1.1.4.3 with following exceptions.

- Table 7.3.1-3 in TS 38.508-1 [14] is used with condition SMTC.1 RedCap.

18.2.1.1.5 Test requirement

Same as the test requirements given in clause 8.3.1.1.5 with following exceptions:

- Table 8.3.1.1.5-1 is replaced by Table 18.2.1.1.5-1.
- Table 8.3.1.1.5-2 is replaced by Table 18.2.1.1.5-2.

Table 18.2.1.1.5-1: Cell specific test parameters for E-UTRA PCell (Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1,2,3,4,5,6,7,8	2		
Duplex mode		1,2,3,4	FDD		
		5,6,7,8	TDD		
TDD special subframe configuration[Note1]		5,6,7,8	6		
TDD uplink-downlink configuration[Note1]		5,6,7,8	1		
$BW_{channel}$	MHz	1,2,3,4,5,6,7,8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100		
PRACH Configuration[Note2]		1,2,3,4	4		
		5,6,7,8	53		
PDSCH parameters: DL Reference Measurement Channel[Note3]		1,2,3,4	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		5,6,7,8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1,2,3,4	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		5,6,7,8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns[Note3]		1,2,3,4	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		5,6,7,8	5 MHz: OP.9 TDD		

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
			10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1,2,3,4,5,6,7,8	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA Note4					
OCNG_RB Note4					
N_{oc} Note5	dBm/15 kHz	1,2,3,4,5,6,7,8	-98		
$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6,7,8	7	5.45 Note 8	5.45 Note 8
$\hat{E}_s/I_{ot}$ Note6	dB	1,2,3,4,5,6,7,8	7	5.45	5.45
RSRP Note6	dBm/15 kHz	1,2,3,4,5,6,7,8	-91	-92.55	-92.55
SCH_RP Note6	dBm/15 kHz	1,2,3,4,5,6,7,8	-91	-92.55	-92.55
Io Note6	dBm/9 MHz	1,2,3,4,5,6,7,8	-62.43	-63.68	-63.68
Propagation Condition		1,2,3,4,5,6,7,8	AWGN		
Antenna Configuration and Correlation Matrix Note7		1,2,3,4,5,6,7,8	1x2 Low		

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
NOTE 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
NOTE 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
NOTE 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].
NOTE 8: Including test tolerance given in Annex F.

Table 18.2.1.1.5-2: NR neighbour Cell specific test parameters for NR neighbour (Cell 2)

Parameter		Unit	Configuration	Cell 2		
				T1	T2	T3
RF channel number			1,2,3,4,5,6,7,8	1		
Duplex mode			1,5	FDD		
			2,3,6,7	TDD		
			4.8	HD-FDD		
TDD Configuration			2 6	TDDConf.1.1		
			3,7	TDDConf.2.1		
$BW_{channel}$		MHz	1,4,5,8	10: $N_{RB,c}$ = 52 (FDD)		
			2,6	10: $N_{RB,c}$ = 52 (TDD)		
			3,7	20: $N_{RB,c}$ = 51 (TDD)		
PDSCH reference measurement channel			1,4,5,8	SR.1.1 FDD		
			2,6	SR.1.1 TDD		
			3,7	SR.2.1 TDD		
CORSET reference channel			1,4,5,8	CR.1.1 FDD		
			2,6	CR.1.1 TDD		
			3,7	CR.2.1 TDD		
PRACH configuration			1,2,3,4,5,6,7,8	PRACH.1 FR1		
OCNG pattern Note1			1,2,3,4,5,6,7,8	OP.1		
BWP	Initial DL BWP		1,2,3,4,5,6,7,8	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		

	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1,2,3,4,5,6,7,8	SMTC.1 RedCap		
SSB configuration			1,2,4,5,6,8	SSB.4 RedCap FR1		
			3,7	SSB.2 RedCap FR1		
b2-Threshold2NR		dBm	1,2,4,5,6,8	-106		
			3,7	-103		
EPRE ratio of PSS to SSS		dB	1,2,3,4,5,6,7,8	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc} Note2		dBm/15 KHz	1,2,3,4,5,6,7,8	-98		
N_{oc} Note2		dBm/SCS	1,2,4,5,6,8	-98		
			3,7	-95		
$\hat{E}_s/N_{oc}$		dB	1,2,3,4,5,6,7,8	-infinity	1.55 Note 4	1.55 Note 4
$\hat{E}_s/I_{ot}$ Note3		dB	1,2,3,4,5,6,7,8	-infinity	1.55	1.55
SS-RSRP Note3		dBm/SCS	1,2,4,5,6,8	-infinity	-96.45	-96.45
			3,7	-infinity	-93.44	-93.44
Io Note3		dBm/9.36 MHz	1,2,4,5,6,8	-70.05	-66.19	-66.19
		dBm/18.36 MHz	3,7	-67.13	-63.27	-63.27
Propagation condition			1,2,3,4,5,6,7,8	AWGN		
Antenna Configuration and Correlation Matrix			1,2,3,4,5,6,7,8	1x2 Low		

NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: Including test tolerance given in Annex F.

18.2.2 RRC connection release with redirection for RedCap

18.2.2.0 Minimum conformance requirements

18.2.2.0.1 Redirection from E-UTRA to FR1 RedCap UE

The RedCap UE shall be capable of performing the RRC connection release with redirection to the target NR cell within $T_{connection_release_redirect_NR_RedCap}$.

The time delay ($T_{connection_release_redirect_NR_RedCap}$) is the time between the end of the last TTI containing the RRC command, "*RRCConnectionRelease*" (TS 36.331 [2]) on the E-UTRAN PDSCH and the time the UE starts to send random access to the target NR cell. The time delay ($T_{connection_release_redirect_NR_RedCap}$) shall be less than:

$$T_{connection_release_redirect_NR_RedCap} = T_{RRC_procedure_delay} + T_{identify\text{-}NR_Redcap} + T_{SI\text{-}NR_RedCap} + T_{RACH_RedCap}$$

The target NR cell shall be considered detectable for 1 Rx RedCap when for each relevant SSB:

- SSB_RP and SSB $\hat{E}s/Iot$ according to Annex B.2.X of TS 38.133 [6] for a corresponding NR Band.

The target NR cell shall be considered detectable for 2 Rx RedCap when for each relevant SSB:

- SSB_RP and SSB $\hat{E}s/Iot$ according to Annex B.2.X of TS 38.133 [6] for a corresponding NR Band.

$T_{RRC_procedure_delay}$: It is the RRC procedure delay for processing the received message "*RRCConnectionRelease*" as defined in clause 6.2.2 of TS 36.331 [2]. It shall be less than 110 ms.

$T_{identify-NR_RedCap}$: It is the time to identify the target NR cell and depends on the frequency range (FR) of the target NR cell. It is defined in Table 18.2.2.0-1 for 1 Rx RedCap for FR1 and in Table 18.2.2.0-2 for 2 Rx RedCap. $T_{identify-NR_RedCap} = T_{PSS/SSS-sync_RedCap} + T_{meas_RedCap}$, where $T_{PSS/SSS-sync_RedCap}$ is the cell search time and T_{meas_RedCap} is the measurement time due to cell selection criteria evaluation. The RedCap UE operating in NR HD-FDD shall meet the requirements in this section provided that the SSB is available at the UE at least once every SMTC period during $T_{identify-NR_RedCap}$.

T_{SI-NR_RedCap}: It is the time required for acquiring all the relevant system information of the target NR cell. This time depends upon whether the UE is provided with the relevant system information of the target NR cell or not by the old NR cell before the RRC connection is released.

T_{RACH_RedCap}: It is the delay caused due to the random access procedure when sending random access to the target NR cell. T_{RACH_RedCap} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [39]. The RedCap UE operating in NR HD-FDD mode shall perform the PRACH transmission on the PRACH resource of the target NR cell provided that the UE has received at least one SSB associated with the PRACH resource during the last [TBD] period in the target NR cell.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the redirection command, otherwise T_{rs} is the SMTC periodicity configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing configured for the RRC connection release with redirection. If the UE is not provided with SMTC configuration or measurement object for the frequency which is also configured for the RRC connection release with redirection then:

- the requirement in this section is applied with T_{rs} = 20 ms assuming the SSB transmission periodicity is not larger than 20 ms,
- there is no requirement if the SSB transmission periodicity is larger than 20 ms.

Table 18.2.2.0-1: Time to identify target NR cell for RRC connection release with redirection to NR for 1 Rx RedCap

Frequency range (FR) of target NR cell	$T_{identify-NR_RedCap}$
FR1	MAX (680 ms, 12 x Trs)

Table 18.2.2.0-2: Time to identify target NR cell for RRC connection release with redirection to NR for 2 Rx RedCap

Frequency range (FR) of target NR cell	$T_{identify-NR_RedCap}$
FR1	MAX (680 ms, 11 x Trs)
FR2	MAX (880 ms, 88 x Trs)

The normative reference for this requirement is TS 36.133 [23] clause 6.3.2.6.

18.2.2.1 E-UTRA - NR SA FR1 RRC connection release with redirection for 2 Rx UE

18.2.2.1.1 Test purpose

To verify RRC connection release with redirection from E-UTRA to NR requirements for 2Rx RedCap specified in 36.133 [23] clause 6.3.2.6.

18.2.2.1.2 Test applicability

This test applies to all types of NR RedCap UE with 2Rx from Release 17 onwards.

18.2.2.1.3 Minimum conformance requirement

The minimum conformance requirements are specified in clause 18.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clauses A.18.2.2.1.

18.2.2.1.4 Test description

18.2.2.1.4.1 Initial conditions

This test can be run in the configurations defined in Table 18.2.2.1.4.1-1

Table 18.2.2.1.4.1-1: Supported test configurations

Configuration	Description
18.2.2.1-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
18.2.2.1-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
18.2.2.1-3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
18.2.2.1-4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
18.2.2.1-5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
18.2.2.1-6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
18.2.2.1-7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
18.2.2.1-8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Configure the test equipment and the DUT according to the parameters in Table 18.2.2.1.4.1-2.

Table 18.2.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 6.3.2.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.6.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.2	
Exceptions to connection diagram			

1. The general test parameters settings are given in Table 18.2.2.1.4.1-3 below.
2. Message contents are defined in clause 18.2.2.1.4.3.
3. There are two cells specified in the test. Cell 1 is the E-UTRA PCell and Cell 2 is the NR neighbour cell. Cell 1 is configured according to TS 36.521-3 [26] Annex C.1.0 and C.1.1, Cell 2 is configured according to Annex C.1.1 and C.1.2,

Table 18.2.2.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	E-UTRA Cell
	Neighbouring cell		Cell 2	NR Cell
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	5	
T2		s	2.3	

18.2.2.1.4.2 Test procedure

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCConnectionRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last

TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

1. Ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3.
2. Set the parameters according to T1 in Table 18.2.2.1.5-1 for Cell 1 and 18.2.2.1.5-2 for Cell 2. T1 starts.
3. SS shall transmit an *RRCConnectionRelease* with *redirectedCarrierInfo* during period T1.
4. The SS shall start T2 timer when the last TTI containing the *RRCConnectionRelease* message is sent to UE.
5. When T2 starts, the SS shall switch the power setting from T1 to T2 as specified in Table 18.2.2.1.5-1 for Cell 1 and 18.2.2.1.5-2 for Cell 2.
6. The UE shall transmit an *RRCSetupRequest* message.
7. If the UE transmits the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
8. After T2 expires, the UE shall be switched off. Then ensure the UE is in State 3A-RF according to TS 36.508 [25] clause 7.2A.3. Cell 1 is the active cell and Cell 2 shall be powered OFF.
9. The SS shall set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
10. Repeat step 2-9 until the confidence level according to Table G.2.3-1 in Annex G clause G.2 is achieved.

18.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

Table 18.2.2.1.4.3-1: RRCConnectionRelease (Test procedure, Step 3)

Derivation Path: 36.508 [25] Table 4.6.1-15			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionRelease ::= SEQUENCE {			
criticalExtensions CHOICE {			
c1 CHOICE {			
rrcConnectionRelease-r8 SEQUENCE {			
redirectedCarrierInfo CHOICE {			
nr-r15 SEQUENCE {			
carrierFreq-r15	ARFCN-ValueNR-r15 of Cell 2		
subcarrierSpacingSSB-r15	khz15		Config 1,2,4,5,7,8
	Khz30		Config 3,6
smtc-r15 SEQUENCE {			
periodicityAndOffset-r15 CHOICE {			
sf40-r15	0		
}			
ssb-Duration-r15	sf1		
}			
}			
}			
}			
}			
}			
}			

18.2.2.1.5 Test requirement

Table 18.2.2.1.4.3-1 and Table 18.2.2.1.4.3-2 define the primary level settings for redirection from E-UTRA to NR RedCap test case.

Table 18.2.2.1.5-1: E-UTRA Cell specific test parameters (Cell 1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1,2,3,4,5,6,7,8	2	
Duplex mode		1,2,3,7	FDD	
		4,5,6,8	TDD	
TDD special subframe configuration[Note1]		4,5,6,8	6	
TDD uplink-downlink configuration[Note1]		4,5,6,8	1	
$BW_{channel}$	MHz	1,2,3,4,5,6,7,8	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PRACH Configuration[Note2]		1,2,3,7	4	
		4,5,6,8	53	
PDSCH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4,5,6,8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note3]		1,2,3,7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4,5,6,8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note3]		1,2,3,7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4,5,6,8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1,2,3,4,5,6,7,8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note4]				
OCNG_RB[Note4]				
N_{oc}[Note5]	dBm/15kHz	1,2,3,4,5,6,7,8	-98	
$\hat{E}_s/N_{oc}$	dB	1,2,3,4,5,6,7,8	4	4
$\hat{E}_s/I_{ot}$[Note6]	dB	1,2,3,4,5,6,7,8	4	4
RSRP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-94	-94
SCH_RP[Note6]	dBm/15kHz	1,2,3,4,5,6,7,8	-94	-94
Io[Note6]	dBm/9MHz	1,2,3,4,5,6,7,8	-64.76	-64.76
Propagation Condition		1,2,3,4,5,6,7,8	AWGN	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table 18.2.2.1.5-2: NR Cell specific test parameters (Cell 2)

Parameter		Unit	Cell 2	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
	Config 7,8		HD-FDD	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6		SSB.1 RedCap FR1	
TDD configuration	Config 1,4,7,8		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
BWP BW	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4,7,8		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD	
CORESET Reference Channel	Config 1,4,7,8		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD	
OCNG Patterns			OP.1	
SMTC configuration	Config 1,2,4,5,7,8		SMTC.1 RedCap FR1	
	Config 3,6		SMTC.1 RedCap FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PRACH configuration			PRACH.1 FR1	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	
	Config 3,6		-95	
$\hat{E}_s / I_{ot}$		dB	-infinity	4
$\hat{E}_s / N_{oc}$		dB	-infinity	4
Io Note3	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-70.05	-64.59
	Config 3,6	dBm/ 18.36MHz	-67.12	-61.67
Propagation condition		-	AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{connection_release_redirect_NR_RedCap} = T_{RRC_procedure_delay} + T_{identify\text{-}NR_Redcap} + T_{SI\text{-}NR_RedCap} + T_{RACH_RedCap}$$

where:

$T_{RRC_procedure_delay}$ = 110 ms and is specified in clause 12 in TS 38.331 [13].

$T_{identify\text{-}NR}$ = 680 ms in the test.

$T_{SI\text{-}NR_RedCap}$ = 1280 ms, it is the time required for receiving all the relevant system information as defined in TS 38.331[13] for the target NR cell.

T_{RACH_RedCap} = 170 ms in the test.

This gives a total of 2240 ms.

18.3 Measurement procedure for RedCap

18.3.1 E-UTRA - NR Measurements for RedCap

18.3.1.0 Minimum conformance requirements

18.3.1.0.1 Minimum conformance requirements for E-UTRA - NR event-triggered measurement

The UE shall be able to identify new inter-RAT NR cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-RAT cells if carrier frequency information is provided by the PCell, even if no explicit neighbour list with physical layer cell identities is provided.

Requirements in this clause are applicable to both E-UTRA FDD and E-UTRA TDD serving cell.

When measurement gaps are scheduled, the RedCap UE shall be able to identify a new detectable cell within $T_{identify_irat_without_index_RedCap}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise, UE shall be able to identify a new detectable inter-RAT cell within $T_{identify_irat_with_index_RedCap}$. The UE shall be able to identify a new detectable inter-RAT SS block of an already detected cell within $T_{identify_irat_without_index_RedCap.}$

$$T_{identify_irat_without_index_RedCap} = (T_{PSS/SSS_sync_irat_RedCap} + T_{SSB_measurement_period_irat_RedCap}) \text{ ms}$$

$$T_{identify_irat_with_index_RedCap} = (T_{PSS/SSS_sync_irat_RedCap} + T_{SSB_measurement_period_irat_RedCap} + T_{SSB_time_index_irat_RedCap}) \text{ ms}$$

Where:

$T_{PSS/SSS_sync_irat_RedCap}$: it is the time period used in PSS/SSS detection given in Table 18.3.1.0.1-1 and Table 18.3.1.0.1-3 for 2 Rx RedCap, Table 18.3.1.0.1-2 for 1 Rx RedCap.

$T_{SSB_time_index_irat_RedCap}$: it is the time period used to acquire the index of the SSB being measured given in Table 18.3.1.0.1-4 and Table 18.3.1.0.1-6 for 2 Rx RedCap, Table 18.3.1.0.1-5 for 1 Rx RedCap.

$T_{SSB_measurement_period_irat_RedCap}$: equal to a measurement period of SSB based measurement given in Table 18.3.1.0.1-7 and Table 18.3.1.0.1-9 for 2 Rx RedCap, Table 18.3.1.0.1-8 for 1 Rx RedCap.

$M_{pss/sss_sync_irat_RedCap}$: For a 2 Rx RedCap supporting FR2 power class 7, $M_{pss/sss_sync_irat_RedCap}$ = 40 samples.

$M_{SSB_index_irat_RedCap}$: For a 2 Rx RedCap supporting FR2 power class 7, $M_{SSB_index_irat_RedCap}$ = 40 samples.

$M_{meas_period_irat_RedCap}$: For a 2 Rx RedCap supporting FR2 power class 7, $M_{meas_period_irat}$ = 40 samples.

N_{freq_RedCap} is defined in 38.133 [6] clause 8.1.2.1.1d.

Table 18.3.1.0.1-1: Time period for PSS/SSS detection for 2 Rx RedCap (Frequency range FR1)

Condition NOTE1	$T_{PSS/SSS_sync_irat_RedCap}$
No DRX	Max(600ms, 8 × Max(MGRP, SMTC period)) × N_{freq_RedCap}
DRX cycle ≤ 320ms	Max(600ms, Ceil(8×1.5) × Max(MGRP, SMTC period, DRX cycle)) × N_{freq_RedCap}
DRX cycle > 320ms	8 × DRX cycle × N_{freq_RedCap}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 3.6.1 of TS 38.133 [50].	

Table 18.3.1.0.1-2: Time period for PSS/SSS detection for 1 Rx RedCap (Frequency range FR1)

Condition NOTE1	$T_{PSS/SSS_sync_irat_RedCap}$
No DRX	Max(600ms, 7 × Max(MGRP, SMTC period)) × N_{freq_RedCap}
DRX cycle ≤ 320ms	Max(600ms, Ceil(7 *1.5) × Max(MGRP, SMTC period, DRX cycle)) × N_{freq_RedCap}
DRX cycle > 320ms	7 × DRX cycle × N_{freq_RedCap}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 3.6.1 of TS 38.133 [50].	

Table 18.3.1.0.1-3: Time period for PSS/SSS detection for 2 Rx RedCap (Frequency range FR2)

Condition NOTE1	$T_{PSS/SSS_sync_irat_RedCap}$
No DRX	Max(600ms, $M_{pss/sss_sync_irat_RedCap}$ × Max(MGRP, SMTC period)) × N_{freq_RedCap}
DRX cycle ≤ 320ms	Max(600ms, (1.5 × $M_{pss/sss_sync_irat_RedCap}$) × Max(MGRP, SMTC period, DRX cycle)) × N_{freq_RedCap}
DRX cycle > 320ms	$M_{pss/sss_sync_irat_RedCap}$ × DRX cycle × N_{freq_RedCap}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 3.6.1 of TS 38.133 [50].	

Table 18.3.1.0.1-4: Time period for time index detection for 2 Rx RedCap (Frequency range FR1)

Condition NOTE1	$T_{SSB_time_index_irat_RedCap}$
No DRX	Max(120ms, 3 × Max(MGRP, SMTC period)) × N_{freq_RedCap}
DRX cycle ≤ 320ms	Max(120ms, Ceil(3 × 1.5) × Max(MGRP, SMTC period, DRX cycle)) × N_{freq_RedCap}
DRX cycle > 320ms	3 × DRX cycle × N_{freq_RedCap}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 3.6.1 of TS 38.133 [50].	

Table 18.3.1.0.1-5: Time period for time index detection for 1 Rx RedCap (Frequency range FR1)

Condition NOTE1	$T_{SSB_time_index_irat_RedCap}$
No DRX	Max(160ms, 6 × Max(MGRP, SMTC period)) × N_{freq_RedCap}
DRX cycle ≤ 320ms	Max(160ms, Ceil(6 × 1.5) × Max(MGRP, SMTC period, DRX cycle)) × N_{freq_RedCap}
DRX cycle > 320ms	6 × DRX cycle × N_{freq_RedCap}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 3.6.1 of TS 38.133 [50].	

Table 18.3.1.0.1-6: Time period for time index detection for 2 Rx RedCap (Frequency range FR2)

Condition NOTE1	$T_{SSB_time_index_irat_RedCap}$
No DRX	Max(200ms, $M_{SSB_index_irat_RedCap}$ × Max(MGRP, SMTC period)) × N_{freq_RedCap}
DRX cycle ≤ 320ms	Max(200ms, (1.5 × $M_{SSB_index_irat_RedCap}$) × Max(MGRP, SMTC period, DRX cycle)) × N_{freq_RedCap}
DRX cycle > 320ms	$M_{SSB_index_irat_RedCap}$ × DRX cycle × N_{freq_RedCap}
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 3.6.1 of TS 38.133 [50].	

In the requirements, an NR cell is considered detectable when:

- NR SS-RSRP related conditions in the accuracy requirements in Section 9.11.x are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 of TS 38.133 [50],
- NR SS-RSRQ related conditions in the accuracy requirements in Section 9.11.y are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 of TS 38.133 [50],
- NR SS-SINR related conditions in the accuracy requirements in Section 9.11.z are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 of TS 38.133 [50].

The RedCap UE operating in NR HD-FDD shall meet the current PSS/SSS detection requirements provided that at least 5 SMTC windows are available at the UE during the PSS/SSS detection time.

The RedCap UE operating in NR HD-FDD shall meet the current time index detection requirements provided that at least 3 SMTC windows are available at the UE during the time index detection time.

When measurement gaps are scheduled for NR measurements the UE physical layer shall be capable of reporting NR SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clause 9.11, with measurement period as shown in table 8.20.2.1-5 and 8.20.2.1-6 for 2Rx UE, table 8.20.2.1-5a for 1Rx UE:

Table 8.20.2.1-5: Measurement period for inter-RAT measurements for 2 Rx RedCap (Frequency range FR1)

Condition NOTE1	$T_{SSB_measurement_period_irat_RedCap}$
No DRX	$Max(200ms, 8 \times Max(MGRP, SMTC\ period)) \times N_{freq_RedCap}$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(8 \times 1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times N_{freq_RedCap}$
DRX cycle > 320ms	$8 \times DRX\ cycle \times N_{freq_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 3.6.1 of TS 38.133 [50].	

Table 8.20.2.1-5a: Measurement period for inter-RAT measurements for 1 Rx RedCap (Frequency range FR1)

Condition NOTE1	$T_{SSB_measurement_period_irat_RedCap}$
No DRX	$Max(200ms, 8 \times Max(MGRP, SMTC\ period)) \times N_{freq_RedCap}$
DRX cycle ≤ 320ms	$Max(200ms, Ceil(8 \times 1.5) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times N_{freq_RedCap}$
DRX cycle > 320ms	$8 \times DRX\ cycle \times N_{freq_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 3.6.1 of TS 38.133 [50].	

Table 8.20.2.1-6: Measurement period for inter-RAT measurements for 2 Rx RedCap (Frequency range FR2)

Condition NOTE1	$T_{SSB_measurement_period_irat_RedCap}$
No DRX	$Max(400ms, M_{meas_period_irat_RedCap} \times Max(MGRP, SMTC\ period)) \times N_{freq_RedCap}$
DRX cycle ≤ 320ms	$Max(400ms, (1.5 \times M_{meas_period_irat_RedCap}) \times Max(MGRP, SMTC\ period, DRX\ cycle)) \times N_{freq_RedCap}$
DRX cycle > 320ms	$M_{meas_period_irat_RedCap} \times DRX\ cycle \times N_{freq_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in section 3.6.1 of TS 38.133 [50].	

The RedCap UE operating in NR HD-FDD shall meet the current measurement requirements provided that at least 5 SMTC windows are available at the UE during the measurement period.

Reported measurements in event triggered measurement reports shall meet the requirements in clause 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{identify_irat_without_index_RedCap}$ or $T_{identify_irat_with_index_RedCap}$ for the minimum requirements.

If an NR cell which has been detectable at least for the time period $T_{identify_irat_without_index_RedCap}$. or $T_{identify_irat_with_index_RedCap}$ defined in clause 8.20.2.1 for the minimum requirements and then triggers the measurement report as per TS 36.331 [2], the event triggered measurement reporting delay shall be less than $T_{SSB_measurement_period_irat_RedCap}$ defined in clause 8.20.2.1 provided the timing to that cell has not changed more than ±3200 Tc while measurement gap has not been available and the L3 filter has not been used.

18.3.1.1 E-UTRA - NR SA FR1 event triggered reporting without SSB time index detection in non-DRX

18.3.1.1.1 Test purpose

To verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause TS 36.133 [23] clause 8.20.2 for E-UTRAN FDD-NR measurements and TS 36.133 [23] clause 8.20.3 for E-UTRAN TDD-NR measurements.

18.3.1.1.2 Test applicability

This test applies to all E-UTRA UE from release 17 onwards and capable of NR RedCap with 2Rx.

18.3.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 18.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.18.3.1.1.

18.3.1.1.4 Test description

Same as the test description given in clause 8.4.2.1.4.

18.3.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 8.4.2.1.4.1 with following exceptions:

- Table 8.4.2.1.4.1-1 is replaced by Table 18.3.1.1.4.1-1.
- Table 8.4.2.1.4.1-2 is replaced by Table 18.3.1.1.4.1-2.
- Table 8.4.2.1.4.1-3 is replaced by Table 18.3.1.1.4.1-3.

Table 18.3.1.1.4.1-1: Supported test configurations

Configuration	Description
18.3.1.1-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.3.1.1-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.3.1.1-3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.3.1.1-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.3.1.1-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.3.1.1-6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.3.1.1-7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
18.3.1.1-8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table 18.3.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.16-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 18.3.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 18.3.1.1.4.1-3: General test parameters

Parameter		Unit	Value	Comment
			Test 1	
E-UTRA RF Channel Numbers			1	One E-UTRA carrier frequency is used.
NR RF Chanel Number			1	One FR1 NR carrier frequency is used.
Active cell			E-UTRA cell 1	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id			0	As specified in Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset			39	As specified in TS 36.331 [29].
Hysteresis		dB	0	
CP length			Normal	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	DRX is not used
Time offset between serving and neighbour cells	Config 1,4,7,8		3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
	Config 2,3,5,6		3µs	Synchronous cells.
T1		s	5	
T2		s	1	

18.3.1.1.4.2 Test procedure

Same as the test procedure given in clause 8.4.2.1.4.2

18.3.1.1.4.3 Message contents

Same as the message contents given in clause 8.4.2.1.4.3 with following exceptions:

- The specific message contents exceptions for test configuration 8.4.2.1-1 and 8.4.2.1-4 also apply to test configuration18.3.1.1-7 and 18.3.1.1-8.
- Condition SSB.2 FR1 is replaced by SSB.1 RedCap FR1
- Table 8.4.2.1.4.3-2 is replaced by table 18.3.1.1.4.3-1.

Table 18.3.1.1.4.3-1: SchedulingRequest-Config-DEFAULT

Derivation Path: TS 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 18.3.1.1-1/2/3/7
	22		Config 18.3.1.1-4/5/6/8
}			
}			

18.3.1.1.5 Test requirement

Same as the test requirements given in clause 8.4.2.1.5 with following exceptions:

- Table 8.4.2.1.5-1 is replaced by Table 18.3.1.1.5-1.
- Table 8.4.2.1.5-2 is replaced by Table 18.3.1.1.5-2.

Table 18.3.1.1.5-1: E-UTRAN Cell specific test parameters

Parameter		Unit	Cell 1	
			T1	T2
RF channel number			1	
Duplex mode	Config 1,2,3,7		FDD	
	Config 4,5,6,8		TDD	
TDD special subframe configuration[Note1]	Config 4,5,6,8		6	
TDD uplink-downlink configuration[Note1]	Config 4,5,6,8		1	
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]	Config 1,2,3,7		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
	Config 4,5,6,8		5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1,2,3,7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
	Config 4,5,6,8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]	Config 1,2,3,7		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
	Config 4,5,6,8		5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1		dBm	-77	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]		dBm/15 kHz	-104	
$\hat{E}_s/N_{oc}$		dB	17	17
$\hat{E}_s/I_{ot}$[Note5]		dB	17	17
RSRP[Note5]		dBm/15 kHz	-87	-87
SCH_RP[Note5]		dBm/15 kHz	-87	-87
Io[Note5]		dBm/ 9 MHz	-56.12	-56.12
Propagation Condition [Note6]			AWGN	
Antenna Configuration and Correlation Matrix [Note6]			1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].				

Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 18.3.1.1.5-2: NR cell specific test parameters

Parameter		Unit	Cell 2	
			T1	T2
NR RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
	Config 7,8		HD-FDD	
TDD configuration	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
OCNG Patterns			OP.1	
SMTC configuration	Config 1,4,7,8		SMTC.2	
	Config 2,3,5,6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15	
	Config 3,6		30	
b2-Threshold2NR	Config 1,2,4,5,7,8	dBm/SCS	-101	
	Config 3,6		-98	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	
	Config 3,6		-95	
SS-RSRP Note 3	Config 1,2,4,5,7,8	dBm/SCS	-Infinity	-91
	Config 3,6		-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	-Infinity	7
Io Note3	Config 1,2,4,5,7,8	dBm/9.36MHz	-70.05	-62.26
	Config 3,6	dBm/18.36MHz	-67.12	-59.33
Propagation Condition			AWGN	
Antenna Configuration and Correlation Matrix			1x2	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

18.3.1.2 E-UTRA - NR SA FR1 event triggered reporting without SSB time index detection in DRX

18.3.1.2.1 Test purpose

To verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause TS 36.133 [23] clause 8.20.2 for E-UTRAN FDD-NR measurements and TS 36.133 [23] clause 8.20.3 for E-UTRAN TDD-NR measurements.

18.3.1.2.2 Test applicability

This test applies to all E-UTRA UE from release 17 onwards supporting NR RedCap with 2Rx and long DRX cycle.

18.3.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 18.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.18.3.1.2.

18.3.1.2.4 Test description

Same as the test description given in clause 8.4.2.2.4.

18.3.1.2.4.1 Initial conditions

Same as the initial conditions given in clause 8.4.2.2.4.1 with following exceptions:

- Table 8.4.2.2.4.1-1 is replaced by Table 18.3.1.2.4.1-1.
- Table 8.4.2.2.4.1-2 is replaced by Table 18.3.1.2.4.1-2.
- Table 8.4.2.2.4.1-3 is replaced by Table 18.3.1.2.4.1-3.

Table 18.3.1.2.4.1-1: Supported test configurations

Configuration	Description
18.3.1.2-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.3.1.2-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.3.1.2-3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.3.1.2-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.3.1.2-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.3.1.2-6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.3.1.2-7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
18.3.1.2-8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table 18.3.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.16-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 18.3.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 18.3.1.2.4.1-3: General test parameters

Parameter		Unit	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Numbers			1		One E-UTRA carrier frequency is used.
NR RF Channel Number			1		One FR1 NR carrier frequency is used.
Active cell			E-UTRA Cell 1		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			NR Cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id			0		As specified in TS 36.133 [23] Table 8.1.2.1-1.
Measurement gap offset			39		As specified in TS 36.331 [29].
Hysteresis		dB	0		
CP length			Normal		
TimeToTrigger		s	0		
Filter coefficient			0		L3 filtering is not used
DRX			DRX.9	DRX.12	As specified in clause A.5
Time offset between serving and neighbour cells	Config 1,4,7,8		3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
	Config 2,3,5,6		3µs		Synchronous cells.
T1		s	5		
T2		s	2	11	

18.3.1.2.4.2 Test procedure

Same as the test procedure given in clause 8.4.2.2.4.2

18.3.1.2.4.3 Message contents

Same as the message contents given in clause 8.4.2.2.4.3 with following exceptions:

- The specific message contents exceptions for test configuration 8.4.2.2-1 and 8.4.2.2-4 also apply to test configuration18.3.1.2-7 and 18.3.1.2-8.
- Condition SSB.2 FR1 is replaced by SSB.1 RedCap FR1
- Table 8.4.2.2.4.3-2 is replaced by table 18.3.1.2.4.3-1.

Table 18.3.1.2.4.3-1: SchedulingRequest-Config-DEFAULT

Derivation Path: TS 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 18.3.1.2-1/2/3/7
	22		Config 18.3.1.2-4/5/6/8
}			
}			

18.3.1.2.5 Test requirement

Same as the test requirements given in clause 8.4.2.2.5 with following exceptions:

- Table 8.4.2.2.5-1 is replaced by Table 18.3.1.2.5-1.
- Table 8.4.2.2.5-2 is replaced by Table 18.3.1.2.5-2.

Table 18.3.1.2.5-1: E-UTRAN Cell specific test parameters

Parameter		Unit	Cell 1	
			T1	T2
RF channel number			1	
Duplex mode	Config 1,2,3,7		FDD	
	Config 4,5,6,8		TDD	
TDD special subframe configuration[Note1]	Config 4,5,6,8		6	
TDD uplink-downlink configuration[Note1]	Config 4,5,6,8		1	
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]	Config 1,2,3,7		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
	Config 4,5,6,8		5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1,2,3,7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
	Config 4,5,6,8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]	Config 1,2,3,7		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
	Config 4,5,6,8		5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1		dBm	-77	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]		dBm/15 kHz	-104	
$\hat{E}_s/N_{oc}$		dB	17	17
$\hat{E}_s/I_{ot}$[Note5]		dB	17	17
RSRP[Note5]		dBm/15 kHz	-87	-87
SCH_RP[Note5]		dBm/15 kHz	-87	-87
Io[Note5]		dBm/ 9 MHz	-56.12	-56.12
Propagation Condition [Note6]			AWGN	
Antenna Configuration and Correlation Matrix [Note6]			1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 18.3.1.2.5-2: NR cell specific test parameters

Parameter		Unit	Cell 2	
			T1	T2
NR RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
	Config 7,8		HD-FDD	
TDD configuration	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
OCNG Patterns			OP.1	
SMTC configuration	Config 1,4,7,8		SMTC.2	
	Config 2,3,5,6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15	
	Config 3,6		30	
b2-Threshold2NR	Config 1,2,4,5,7,8	dBm/SCS	-101	
	Config 3,6		-98	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	
	Config 3,6		-95	
SS-RSRP Note 3	Config 1,2,4,5,7,8	dBm/SCS	-Infinity	-91
	Config 3,6		-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	-Infinity	7
Io Note3	Config 1,2,4,5,7,8	dBm/9.36MHz	-70.05	-62.26
	Config 3,6	dBm/18.36MHz	-67.12	-59.33
Propagation Condition			AWGN	
Antenna Configuration and Correlation Matrix			1x2	

NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

18.3.1.3 E-UTRA - NR SA FR1 event triggered reporting with SSB time index detection in non-DRX

18.3.1.3.1 Test purpose

To verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause TS 36.133 [23] clause 8.20.2 for E-UTRAN FDD-NR measurements and TS 36.133 [23] clause 8.20.3 for E-UTRAN TDD-NR measurements.

18.3.1.3.2 Test applicability

This test applies to all E-UTRA UE from release 17 onwards and capable of NR RedCap with 2Rx.

18.3.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 18.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.18.3.1.3.

18.3.1.3.4 Test description

Same as the test description given in clause 8.4.2.3.4.

18.3.1.3.4.1 Initial conditions

Same as the initial conditions given in clause 8.4.2.3.4.1 with following exceptions:

- Table 8.4.2.3.4.1-1 is replaced by Table 18.3.1.3.4.1-1.
- Table 8.4.2.3.4.1-2 is replaced by Table 18.3.1.3.4.1-2.
- Table 8.4.2.3.4.1-3 is replaced by Table 18.3.1.3.4.1-3.

Table 18.3.1.3.4.1-1: Supported test configurations

Configuration	Description
18.3.1.3-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.3.1.3-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.3.1.3-3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.3.1.3-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.3.1.3-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.3.1.3-6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.3.1.3-7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
18.3.1.3-8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table 18.3.1.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.16-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 18.3.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 18.3.1.3.4.1-3: General test parameters

Parameter	Unit	Value	Comment
		Test 1	
E-UTRA RF Channel Numbers		1	One E-UTRA carrier frequency is used.
NR RF Chanel Number		1	One FR1 NR carrier frequency is used.
Active cell		E-UTRA cell 1	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		0	As specified in Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset		39	As specified in TS 36.331 [29].
Hysteresis	dB	0	
CP length		Normal	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	DRX is not used

Time offset between serving and neighbour cells	Config 1,4,7,8		3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
	Config 2,3,5,6		3μs	Synchronous cells.
T1		s	5	
T2		s	2	

18.3.1.3.4.2 Test procedure

Same as the test procedure given in clause 8.4.2.3.4.2.

18.3.1.3.4.3 Message contents

Same as the message contents given in clause 8.4.2.3.4.3 with following exceptions:

- The specific message contents exceptions for test configuration 8.4.2.3-1 and 8.4.2.3-4 also apply to test configuration18.3.1.3-7 and 18.3.1.3-8.
- Condition SSB.2 FR1 is replaced by SSB.1 RedCap FR1
- Table 8.4.2.3.4.3-2 is replaced by table 18.3.1.3.4.3-1.

Table 18.3.1.3.4.3-1: SchedulingRequest-Config-DEFAULT

Derivation Path: TS 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 18.3.1.3-1/2/3/7
	22		Config 18.3.1.3-4/5/6/8
}			
}			

18.3.1.3.5 Test requirement

Same as the test requirements given in clause 8.4.2.3.5 with following exceptions:

- Table 8.4.2.3.5-1 is replaced by Table 18.3.1.3.5-1.
- Table 8.4.2.3.5-2 is replaced by Table 18.3.1.3.5-2.

Table 18.3.1.3.5-1: E-UTRAN Cell specific test parameters

Parameter		**Unit**	**Cell 1**	
			T1	**T2**
RF channel number			1	
Duplex mode	Config 1,2,3,7		FDD	
	Config 4,5,6,8		TDD	
TDD special subframe configuration[Note1]	Config 4,5,6,8		6	
TDD uplink-downlink configuration[Note1]	Config 4,5,6,8		1	
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]	Config 1,2,3,7		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
	Config 4,5,6,8		5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters:	Config 1,2,3,7		5 MHz: R.11 FDD 10 MHz: R.6 FDD	

DL Reference Measurement Channel[Note2]			20 MHz: R.10 FDD	
	Config 4,5,6,8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]	Config 1,2,3,7		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
	Config 4,5,6,8		5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1		dBm	-77	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA[Note3]				
OCNG_RB[Note3]				
N_{oc}[Note4]		dBm/15 kHz	-104	
$\hat{E}_s/N_{oc}$		dB	17	17
$\hat{E}_s/I_{ot}$[Note5]		dB	17	17
RSRP[Note5]		dBm/15 kHz	-87	-87
SCH_RP[Note5]		dBm/15 kHz	-87	-87
Io[Note5]		dBm/ 9 MHz	-56.12	-56.12
Propagation Condition [Note6]			AWGN	
Antenna Configuration and Correlation Matrix [Note6]			1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 18.3.1.3.5-2: NR cell specific test parameters

Parameter		Unit	Cell 2	
			T1	T2
NR RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
	Config 7,8		HD-FDD	
TDD configuration	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
OCNG Patterns			OP.1	
SMTC configuration	Config 1,4,7,8		SMTC.2	
	Config 2,3,5,6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15	
	Config 3,6		30	
b2-Threshold2NR	Config 1,2,4,5,7,8	dBm/SCS	-101	
	Config 3,6		-98	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				

EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	
	Config 3,6		-95	
SS-RSRP Note 3	Config 1,2,4,5,7,8	dBm/SCS	-Infinity	-91
	Config 3,6		-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	-Infinity	7
Io Note3	Config 1,2,4,5,7,8	dBm/9.36MHz	-70.05	-62.26
	Config 3,6	dBm/18.36MHz	-67.12	-59.33
Propagation Condition			AWGN	
Antenna Configuration and Correlation Matrix			1x2	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

18.3.1.4 E-UTRA - NR SA FR1 event triggered reporting with SSB time index detection in DRX

18.3.1.4.1 Test purpose

To verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause TS 36.133 [23] clause 8.20.2 for E-UTRAN FDD-NR measurements and TS 36.133 [23] clause 8.20.3 for E-UTRAN TDD-NR measurements.

18.3.1.4.2 Test applicability

This test applies to all E-UTRA UE from release 17 onwards supporting NR RedCap with 2Rx and long DRX cycle.

18.3.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 18.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.18.3.1.4.

18.3.1.4.4 Test description

Same as the test description given in clause 8.4.2.4.4.

18.3.1.4.4.1 Initial conditions

Same as the initial conditions given in clause 8.4.2.4.4.1 with following exceptions:

- Table 8.4.2.4.4.1-1 is replaced by Table 18.3.1.4.4.1-1.
- Table 8.4.2.4.4.1-2 is replaced by Table 18.3.1.4.4.1-2.
- Table 8.4.2.4.4.1-3 is replaced by Table 18.3.1.4.4.1-3.

Table 18.3.1.4.4.1-1: Supported test configurations

Configuration	Description
18.3.1.4-1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.3.1.4-2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.3.1.4-3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.3.1.4-4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
18.3.1.4-5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
18.3.1.4-6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
18.3.1.4-7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
18.3.1.4-8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table 18.3.1.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.16-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 18.3.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

Table 18.3.1.4.4.1-3: General test parameters

Parameter		Unit	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Numbers			1		One E-UTRA carrier frequency is used.
NR RF Channel Number			1		One FR1 NR carrier frequency is used.
Active cell			E-UTRA Cell 1		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			NR Cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id			0		As specified in TS 36.133 [23] Table 8.1.2.1-1.
Measurement gap offset			39		As specified in TS 36.331 [29].
Hysteresis		dB	0		
CP length			Normal		
TimeToTrigger		s	0		
Filter coefficient			0		L3 filtering is not used
DRX			DRX.9	DRX.12	As specified in clause A.5
Time offset between serving and neighbour cells	Config 1,4,7,8		3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
	Config 2,3,5,6		3μs		Synchronous cells.
T1		s	5		
T2		s	2	13	

18.3.1.4.4.2 Test procedure

Same as the test procedure given in clause 8.4.2.4.4.2.

18.3.1.4.4.3 Message contents

Same as the message contents given in clause 8.4.2.4.4.3 with following exceptions:

- The specific message contents exceptions for test configuration 8.4.2.4-1 and 8.4.2.4-4 also apply to test configuration18.3.1.4-7 and 18.3.1.4-8.
- Condition SSB.2 FR1 is replaced by SSB.1 RedCap FR1
- Table 8.4.2.4.4.3-2 is replaced by table 18.3.1.4.4.3-1.

Table 18.3.1.4.4.3-1: SchedulingRequest-Config-DEFAULT

Derivation Path: TS 36.508 [25] Table 4.6.3-20			
Information Element	**Value/remark**	**Comment**	**Condition**
SchedulingRequest-Config-DEFAULT ::= CHOICE {			
setup SEQUENCE {			
sr-ConfigIndex	25		Config 18.3.1.4-1/2/3/7
	22		Config 18.3.1.4-4/5/6/8
}			
}			

18.3.1.4.5 Test requirement

Same as the test requirements given in clause 8.4.2.4.5 with following exceptions:

- Table 8.4.2.4.5-1 is replaced by Table 18.3.1.4.5-1.
- Table 8.4.2.4.5-2 is replaced by Table 18.3.1.4.5-2.

Table 18.3.1.4.5-1: E-UTRAN Cell specific test parameters

Parameter		**Unit**	**Cell 1**	
			T1	**T2**
RF channel number			1	
Duplex mode	Config 1,2,3,7		FDD	
	Config 4,5,6,8		TDD	
TDD special subframe configuration[Note1]	Config 4,5,6,8		6	
TDD uplink-downlink configuration[Note1]	Config 4,5,6,8		1	
$BW_{channel}$		MHz	5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100	
PDSCH parameters: DL Reference Measurement Channel[Note2]	Config 1,2,3,7		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
	Config 4,5,6,8		5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]	Config 1,2,3,7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
	Config 4,5,6,8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns[Note2]	Config 1,2,3,7		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
	Config 4,5,6,8		5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1		dBm	-77	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				

PHICH_RB			
PDCCH_RA			
PDCCH_RB			
PDSCH_RA			
PDSCH_RB			
OCNG_RA Note3			
OCNG_RB Note3			
N_{oc} Note4	dBm/15 kHz	-104	
$\hat{E}_s/N_{oc}$	dB	17	17
$\hat{E}_s/I_{ot}$ Note5	dB	17	17
RSRP Note5	dBm/15 kHz	-87	-87
SCH_RP Note5	dBm/15 kHz	-87	-87
Io Note5	dBm/ 9 MHz	-56.12	-56.12
Propagation Condition Note6		AWGN	
Antenna Configuration and Correlation Matrix Note6		1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [23] respectively.
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [27].

Table 18.3.1.4.5-2: NR cell specific test parameters

Parameter		Unit	Cell 2	
			T1	T2
NR RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
	Config 7,8		HD-FDD	
TDD configuration	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
$BW_{channel}$	Config 1,2,4,5,7,8	MHz	10: $N_{RB,c}$ = 52	
	Config 3,6		20: $N_{RB,c}$ = 51	
OCNG Patterns			OP.1	
SMTC configuration	Config 1,4,7,8		SMTC.2	
	Config 2,3,5,6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15	
	Config 3,6		30	
b2-Threshold2NR	Config 1,2,4,5,7,8	dBm/SCS	-101	
	Config 3,6		-98	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-98	
N_{oc} Note2	Config 1,2,4,5,7,8	dBm/SCS	-98	
	Config 3,6		-95	
SS-RSRP Note 3	Config 1,2,4,5,7,8	dBm/SCS	-Infinity	-91
	Config 3,6		-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	-Infinity	7
Io Note3	Config 1,2,4,5,7,8	dBm/9.36MHz	-70.05	-62.26
	Config 3,6	dBm/18.36MHz	-67.12	-59.33

Propagation Condition		AWGN
Antenna Configuration and Correlation Matrix		1x2
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		

18.3.1.5 E-UTRA - NR SA FR2 event triggered reporting without SSB time index detection in non-DRX

Editor's Notes: This test case is incomplete:

- E-UTRA – NR FR2 testability issue is not cleared.
- The TT analysis is complete for test frequencies f ≤ 40.8 GHz
- The TT analysis is complete for UE PC3
- This test case is incomplete for UE power classes other than PC3
- This test case is incomplete for Test frequencies f > 40.8 GHz

18.3.1.5.1 Test purpose

To verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause TS 36.133 [23] clause 8.20.2 for E-UTRAN FDD-NR measurements and TS 36.133 [23] clause 8.20.3 for E-UTRAN TDD-NR measurements.

18.3.1.5.2 Test applicability

This test applies to all E-UTRA UE from release 17 onwards and capable of NR RedCap with 2Rx. Test 1 applies to UEs not supporting per-FR gap and test 2 applies only to UEs supporting per-FR gap.

18.3.1.5.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 18.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.18.3.1.5.

18.3.1.5.4 Test description

18.3.1.5.4.1 Initial conditions

Same as the initial conditions given in clause 8.4.2.5.4.1 with following exceptions:

- Table 8.4.2.5.4.1-1 is replaced by Table 18.3.1.5.4.1-1.
- Table 8.4.2.5.4.1-2 is replaced by Table 18.3.1.5.4.1-2.
- Table 8.4.2.5.4.1-3 is replaced by Table 18.3.1.5.4.1-3.

Table 18.3.1.5.4.1-1: Supported test configurations

Configuration	Description
18.3.1.5-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
18.3.1.5-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table 18.3.1.5.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.16-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 18.3.1.5.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 18.3.1.5.4.1-3: General test parameters

Parameter		Unit	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Numbers			1		One E-UTRA carrier frequency is used.
NR RF Chanel Number			1		One FR1 NR carrier frequency is used.
Active cell			E-UTRA Cell 1		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			NR Cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id			0	N/A	As specified in Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset			39	N/A	As specified in TS 36.331 [29].
Hysteresis		dB	0		
CP length			Normal		
TimeToTrigger		s	0		
Filter coefficient			0		L3 filtering is not used
DRX			OFF		DRX is not used
Time offset between serving and neighbour cells	Config 1		3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
	Config 2		3μs		Synchronous cells.
T1		s	10		
T2		s	6	3	

18.3.1.5.4.2 Test procedure

Same as the test procedure given in clause 8.4.2.5.4.2.

18.3.1.5.4.3 Message contents

Same as the message contents given in clause 8.4.2.5.4.3.

18.3.1.5.5 Test requirement

Same as the test requirements given in clause 8.4.2.5.5 with following exceptions:

- Table 8.4.2.5.5-1 is replaced by Table 18.3.1.5.5-1.

Table 18.3.1.5.5-1: NR cell specific test parameters

Parameter	Unit	Cell 2	
		T1	T2
AoA setup		Setup 2a	
Assumption for UE beams[Note 3]		Rough	
NR RF Channel Number		1	
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
$BW_{channel}$	MHz	100: $N_{RB,c}$ = 24	

OCNG patterns			OP.3	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	-118	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
$\hat{E}_s$		dBm/SCS	-Infinity	-80.6
SSB_RP Note 2		dBm/SCS	-Infinity	-80.6
$\hat{E}_s/Iot_{BB}$ Note 4		dB	-Infinity	8.3
Io Note3		dBm/95.04MHz	-Infinity	-56.0
Propagation Condition			No external noise (Note 5)	

Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 5: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [18].

18.3.1.6 E-UTRA - NR SA FR2 event triggered reporting without SSB time index detection in DRX

Editor's Notes: This test case is incomplete:

- E-UTRA – NR FR2 testability issue is not cleared.
- The TT analysis is complete for test frequencies f ≤ 40.8 GHz
- The TT analysis is complete for UE PC3
- This test case is incomplete for UE power classes other than PC3
- This test case is incomplete for Test frequencies f > 40.8 GHz

18.3.1.6.1 Test purpose

To verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause TS 36.133 [23] clause 8.20.2 for E-UTRAN FDD-NR measurements and TS 36.133 [23] clause 8.20.3 for E-UTRAN TDD-NR measurements.

18.3.1.6.2 Test applicability

This test applies to all E-UTRA UE from release 17 onwards and capable of NR RedCap with 2Rx. Test 1 and test 2 apply to UEs not supporting per-FR gap. Test 3 and test 4 apply only to UEs supporting per-FR gap.

18.3.1.6.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 18.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.18.3.1.6.

18.3.1.6.4 Test description

18.3.1.6.4.1 Initial conditions

Same as the initial conditions given in clause 8.4.2.6.4.1 with following exceptions:

- Table 8.4.2.6.4.1-1 is replaced by Table 18.3.1.6.4.1-1.
- Table 8.4.2.6.4.1-2 is replaced by Table 18.3.1.6.4.1-2.
- Table 8.4.2.6.4.1-3 is replaced by Table 18.3.1.6.4.1-3.

Table 18.3.1.6.4.1-1: Supported test configurations

Configuration	Description
18.3.1.6-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
18.3.1.6-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table 18.3.1.6.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.16-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 18.3.1.6.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 18.3.1.6.4.1-3: General test parameters

Parameter		Unit	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Numbers			1				One E-UTRA carrier frequency is used.
NR RF Chanel Number			1				One FR1 NR carrier frequency is used.
Active cell			E-UTRA Cell 1				E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			NR Cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id			0		N/A		As specified in Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset			39		N/A		As specified in TS 36.331 [29].
Hysteresis		dB	0				
CP length			Normal				
TimeToTrigger		s	0				
Filter coefficient			0				L3 filtering is not used
DRX			DRX.9	DRX.12	DRX.9	DRX.12	
Time offset between serving and neighbour cells	Config 1		3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
	Config 2		3μs				Synchronous cells.
T1		s	10				
T2		s	6	83	6	83	

18.3.1.6.4.2 Test procedure

Same as the test procedure given in clause 8.4.2.6.4.2.

18.3.1.6.4.3 Message contents

Same as the message contents given in clause 8.4.2.6.4.3.

18.3.1.6.5 Test requirement

Same as the test requirements given in clause 8.4.2.6.5 with following exceptions:

- Table 8.4.2.6.5-1 is replaced by Table 18.3.1.6.5-1.

Table 18.3.1.6.5-1: NR cell specific test parameters

Parameter		Unit	Cell 2	
			T1	T2
AoA setup			Setup 1	
Assumption for UE beams Note 3			Rough	
NR RF Channel Number			1	
Duplex mode			TDD	
TDD configuration			TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
OCNG patterns			OP.1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	-106	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-104.7	
N_{oc} Note2		dBm/SCS	-95.7	
SS-RSRP Note 3		dBm/SCS	-Infinity	-87.7
$\hat{E}_s/I_{ot}$ Note 4		dB	-Infinity	8
$\hat{E}_s/N_{oc}$		dB	-Infinity	8
Io Note3		dBm/95.04MHz	-66.7	-58.0
Propagation Condition			AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

18.3.1.7 E-UTRA - NR SA FR2 event triggered reporting with SSB time index detection in non-DRX

Editor's Notes: This test case is incomplete:

- E-UTRA – NR FR2 testability issue is not cleared.
- The TT analysis is complete for test frequencies f ≤ 40.8 GHz

- The TT analysis is complete for UE PC3
- This test case is incomplete for UE power classes other than PC3
- This test case is incomplete for Test frequencies f > 40.8 GHz

18.3.1.7.1 Test purpose

To verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause TS 36.133 [23] clause 8.20.2 for E-UTRAN FDD-NR measurements and TS 36.133 [23] clause 8.20.3 for E-UTRAN TDD-NR measurements.

18.3.1.7.2 Test applicability

This test applies to all E-UTRA UE from release 17 onwards and capable of NR RedCap with 2Rx. Test 1 applies to UEs not supporting per-FR gap and test 2 applies only to UEs supporting per-FR gap.

18.3.1.7.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 18.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.18.3.1.7.

18.3.1.7.4 Test description

18.3.1.7.4.1 Initial conditions

Same as the initial conditions given in clause 8.4.2.7.4.1 with following exceptions:

- Table 8.4.2.7.4.1-1 is replaced by Table 18.3.1.7.4.1-1.
- Table 8.4.2.7.4.1-2 is replaced by Table 18.3.1.7.4.1-2.
- Table 8.4.2.7.4.1-3 is replaced by Table 18.3.1.7.4.1-3.

Table 18.3.1.7.4.1-1: Supported test configurations

Configuration	Description
18.3.1.7-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
18.3.1.7-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table 18.3.1.7.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.16-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 18.3.1.7.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 18.3.1.7.4.1-3: General test parameters

Parameter	Unit	Value		Comment
		Test 1	Test 2	
E-UTRA RF Channel Numbers		1		One E-UTRA carrier frequency is used.
NR RF Chanel Number		1		One FR1 NR carrier frequency is used.

Active cell			E-UTRA Cell 1		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			NR Cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id			0	N/A	As specified in Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset			39	N/A	As specified in TS 36.331 [29].
Hysteresis		dB	0		
CP length			Normal		
TimeToTrigger		s	0		
Filter coefficient			0		L3 filtering is not used
DRX			OFF		DRX is not used
Time offset between serving and neighbour cells	Config 1		3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
	Config 2		3μs		Synchronous cells.
T1		s	5		
T2		s	5	3	

18.3.1.7.4.2 Test procedure

Same as the test procedure given in clause 8.4.2.7.4.2.

18.3.1.7.4.3 Message contents

Same as the message contents given in clause 8.4.2.7.4.3.

18.3.1.7.5 Test requirement

Same as the test requirements given in clause 8.4.2.7.5 with following exceptions:

- Table 8.4.2.7.5-1 is replaced by Table 18.3.1.7.5-1.

Table 18.3.1.7.5-1: NR cell specific test parameters

Parameter		Unit	Cell 2	
			T1	T2
AoA setup			Setup 1	
Assumption for UE beams Note 3			Rough	
NR RF Channel Number			1	
Duplex mode			TDD	
TDD configuration			TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
OCNG patterns			OP.1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	-106	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2			-104.7	
N_{oc} Note2			-95.7	
SS-RSRP Note 3		dBm/SCS	-Infinity	-87.7
$\hat{E}_s/I_{ot}$			-Infinity	8
$\hat{E}_s/N_{oc}$		dB	-Infinity	8
Io Note3		dBm/95.04MHz	-66.7	-58.0
Propagation Condition			AWGN	

Note 1:	OCNG shall be used such that the cell is fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

18.3.1.8 E-UTRA - NR SA FR2 event triggered reporting with SSB time index detection in DRX

Editor's Notes: This test case is incomplete:

- E-UTRA – NR FR2 testability issue is not cleared.
- The TT analysis is complete for test frequencies f ≤ 40.8 GHz
- The TT analysis is complete for UE PC3
- This test case is incomplete for UE power classes other than PC3
- This test case is incomplete for Test frequencies f > 40.8 GHz

18.3.1.8.1 Test purpose

To verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause TS 36.133 [23] clause 8.20.2 for E-UTRAN FDD-NR measurements and TS 36.133 [23] clause 8.20.3 for E-UTRAN TDD-NR measurements.

18.3.1.8.2 Test applicability

This test applies to all E-UTRA UE from release 17 onwards and capable of NR RedCap with 2Rx. Test 1 and test 2 apply to UEs not supporting per-FR gap. Test 3 and test 4 apply only to UEs supporting per-FR gap.

18.3.1.8.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 18.3.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.18.3.1.8.

18.3.1.8.4 Test description

18.3.1.8.4.1 Initial conditions

Same as the initial conditions given in clause 8.4.2.8.4.1 with following exceptions:

- Table 8.4.2.8.4.1-1 is replaced by Table 18.3.1.8.4.1-1.
- Table 8.4.2.8.4.1-2 is replaced by Table 18.3.1.8.4.1-2.
- Table 8.4.2.8.4.1-3 is replaced by Table 18.3.1.8.4.1-3.

Table 18.3.1.8.4.1-1: Supported test configurations

Configuration	Description
18.3.1.8-1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
18.3.1.8-2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table 18.3.1.8.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 36.508 [25] clause 4.1.
Test frequencies	As specified in Annex E, Table E.16-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 18.3.1.8.4.1-1.		
Propagation conditions	AWGN		As specified in clause C.2.2
Connection Diagram	TE Part	A.3.3.3.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.4.1.1	
Exceptions to connection diagram	N/A		

Table 18.3.1.8.4.1-3: General test parameters

Parameter		Unit	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Numbers			1				One E-UTRA carrier frequency is used.
NR RF Chanel Number			1				One FR1 NR carrier frequency is used.
Active cell			E-UTRA Cell 1				E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			NR Cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id			0		N/A		As specified in Table 8.1.2.1-1 of TS 36.133 [23].
Measurement gap offset			39		N/A		As specified in TS 36.331 [29].
Hysteresis		dB	0				
CP length			Normal				
TimeToTrigger		s	0				
Filter coefficient			0				L3 filtering is not used
DRX			DRX.9	DRX.12	DRX.9	DRX.12	
Time offset between serving and neighbour cells	Config 1		3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
	Config 2		3µs				Synchronous cells.
T1		s	5				
T2		s	7	70	7	70	

18.3.1.8.4.2 Test procedure

Same as the test procedure given in clause 8.4.2.8.4.2.

18.3.1.8.4.3 Message contents

Same as the message contents given in clause 8.4.2.8.4.3.

18.3.1.8.5 Test requirement

Same as the test requirements given in clause 8.4.2.8.5 with following exceptions:

- Table 8.4.2.8.5-1 is replaced by Table 18.3.1.8.5-1.

Table 18.3.1.8.5-1: NR cell specific test parameters

Parameter	Unit	Cell 2	
		T1	T2
AoA setup		Setup 1	
Assumption for UE beams[Note 3]		Rough	
NR RF Channel Number		1	

Duplex mode			TDD	
TDD configuration			TDDConf.3.1	
$BW_{channel}$		MHz	100: $N_{RB,c}$ = 66	
OCNG patterns			OP.1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	-106	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS Note 1				
EPRE ratio of OCNG to OCNG DMRS Note 1				
N_{oc} Note2		dBm/15kHz	-104.7	
N_{oc} Note2		dBm/SCS	-95.7	
SS-RSRP Note 3		dBm/SCS	-Infinity	-87.7
$\hat{E}_s/I_{ot}$ Note 4		dB	-Infinity	8
$\hat{E}_s/N_{oc}$		dB	-Infinity	8
Io Note3		dBm/95.04MHz	-66.7	-58.0
Propagation Condition			AWGN	

Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

19 NR standalone tests for ATG

19.2 RRC_CONNECTED state mobility

19.2.1 Handover for ATG

19.2.1.0 Minimum conformance requirements

19.2.1.0.1 Minimum conformance requirements for NR FR1 – NR FR1 handover

When the UE receives a RRC message implying handover to NR cell, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ msec from the end of the last TTI containing the RRC command. $D_{handover}$ is defined as

$$D_{handover} = T_{RRC_procedure_delay} + T_{interruption}$$

Where:

$T_{RRC_procedure_delay}$: it is the RRC procedure delay, which is 10ms

$T_{interruption}$: it is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover to NR cell is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then T_{search} = 0 ms. If the target cell is an unknown intra-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = N*T_{rs} ms. If the target cell is an unknown inter-frequency cell and the target cell Es/Iot≥-2 dB, then T_{search} = 3* N*T_{rs} ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

For UE with one or multiple omni-directional antenna(s), N = 1;

For UE with the antenna array,

- When network assistance on ATG cells reference location of the target cell is provided to UE, N = 2;
- Otherwise, N = 4.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. T_{Δ} = T_{rs} for both known and unknown target cell.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2D.5 for intra-frequency handover and Clause 9.3D.4 for inter-frequency handover.

The normative reference for this requirement is TS 38.133 [6] clause 6.1E.1.2.

19.2.1.1 Intra-frequency handover from FR1 to FR1; known target cell

Editor's Note: This test case is incomplete for the following configurations:

- Test procedure needs to be updated
- Message contents need to be updated
- TT analysis is missing.
- Test applicability needs to be updated

19.2.1.1.1 Test purpose

To verify the NR ATG UE's ability to perform NR FR1-NR FR1 intra frequency handover for ATG in RRC_CONNECTED state by meeting the delay requirement and interruption length for handover to known target cell.

19.2.1.1.2 Test applicability

This test applies to all types of NR ATG UE release 18 and forward.

19.2.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.2.1.1.

19.2.1.1.4 Test description

19.2.1.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.

The specific gNB reference location is emulated by test system.

This test shall be tested using any of the test configurations in Table 19.2.1.1.4.1-1.

Table 19.2.1.1.4.1-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note1: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 19.2.1.1.4.1-2

Table 19.2.1.1.4.1-2: Initial conditions for NR ATG SA FR1 handover with known target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table [TBD] and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.2.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 19.2.1.1.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Tables 19.2.1.1.4.1-3 and 19.2.1.1.5-1 below.

Table 19.2.1.1.4.1-3: General test parameters Intra-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	

Final condition	Active cell		Cell 2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	not barred	No additional delays in random access procedure.
Time offset between cells		µs	3	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

19.2.1.1.4.2 Test procedure

The test scenario comprises of one NR carrier and two cells as given in tables 19.2.1.1.4.1-3 and 19.2.1.1.5-1. No gap patterns are configured in the test case. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send measurement report A3. An RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 19.2.1.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.
3. SS shall transmit an RRCReconfiguration message, configuring measurement object.
4. UE shall transmit RRCReconfigurationComplete message.
5. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 19.2.1.1.5-1.
6. UE shall transmit a MeasurementReport message triggered by Event A3.
7. SS shall transmit the RRCReconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T2 to T3 as specified in Table 19.2.1.1.5-1. T3 starts.
8. If the UE transmits the uplink PRACH channel to Cell 2 less than 72 ms from the beginning of time period T3 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
9. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.
10. After T3 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
11. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 3) mod1008) for next iteration of the test procedure loop.
12. Repeat steps 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

19.2.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 19.2.1.1.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	

Default RRC messages and information elements contents exceptions	Table H.3.1-1 Table H.3.1-2 with Condition INTRA-FREQ and no GAP NEEDED Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.1 FR1, SMTC pattern 1 and Synchronous cells for Config 1 and 2 Table H.3.1-3 with Condition INTRA-FREQ MO, SSB.2 FR1, SMTC pattern 1 and Synchronous cells for Config 3 Table H.3.1-4 with A3-offset = -1dB Table H.3.1-5 Table H.3.1-7 with Condition INTRA-FREQ Table H.3.2-2 with Condition RBConfig_KeyChange

19.2.1.1.5 Test requirements

Table 19.2.1.1.5-1 defines the primary level settings for all tests.

Table 19.2.1.1.5-1: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52					
	Config 2		10: $N_{RB,c}$ = 52					
	Config 3		40: $N_{RB,c}$ = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR2.1 TDD					
CORESET Reference Channel	Config 1		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR2.1 TDD					
TRS configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								

EPRE ratio of PDSCH to PDSCH EPRE ratio of OCNG DMRS to SSS(Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		dBm/15kHz	-98					
N_{oc} Note2	Config 1,2	dBm/SCS	-98					
	Config 3		-95					
$\hat{E}_s / I_{ot}$		dB	8+TT	-3.3+TT	-3.3+TT	-Infinity	2.36+TT	2.36+TT
$\hat{E}_s / N_{oc}$		dB	8+TT	8+TT	8+TT	-Infinity	11+TT	11+TT
SSB_RP	Config 1,2	dBm/SCS	-90+TT	-90+TT	-90+TT	-Infinity	-87+TT	-87+TT
	Config 3	dBm/SCS	-87+TT	-87+TT	-87+TT	-Infinity	-84+TT	-84+TT
Io Note3	Config 1,2	dBm/9.36MHz	-61.41+TT	-57.06+TT	-57.06+TT	-61.41+TT	-57.06+TT	-57.06+TT
	Config 3	dBm/38.16MHz	-55.31+TT	-50.96+TT	-50.96+TT	-55.31+TT	-50.96+TT	-50.96+TT
Propagation condition	Config 1, 2	-	AWGN+220Hz			AWGN+220Hz		
	Config 3		AWGN+500Hz			AWGN+500Hz		

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 62 ms in the test. $T_{interrupt}$ is defined in clause 19.2.1.0.1.

This gives a total of 72 ms.

19.2.1.2 Inter-frequency handover from FR1 to FR1; unknown target cell

Editor's Note: This test case is incomplete for the following configurations:

- Test procedure needs to be updated
- Message contents need to be updated
- TT analysis is missing.
- Test applicability needs to be updated

19.2.1.2.1 Test purpose

To verify the NR ATG UE's ability to perform NR FR1-NR FR1 inter frequency handover for ATG in RRC_CONNECTED state by meeting the delay requirement and interruption length for handover to unknown target cell.

19.2.1.2.2 Test applicability

This test applies to all types of NR ATG UE release 18 and forward.

19.2.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.2.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.2.1.2.

19.2.1.2.4 Test description

19.2.1.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.

The specific gNB reference location is emulated by test system.

This test shall be tested using any of the test configurations in Table 19.2.1.2.4.1-1.

Table 19.2.1.2.4.1-1: Inter-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note1: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 19.2.1.2.4.1-2

Table 19.2.1.2.4.1-2: Initial conditions for NR ATG SA FR1 handover with known target cell

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table [TBD] and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.2.1.2.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 19.2.1.2.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Tables 19.2.1.2.4.1-3 and 19.2.1.2.5-1 below.

Table 19.2.1.2.4.1-3: General test parameters Inter-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	

Final condition	Active cell		Cell 2	
Access Barring Information		-	not barred	No additional delays in random access procedure.
Time offset between cells		μs	3	Synchronous cells
T1		s	5	
T2		s	≤5	

19.2.1.2.4.2 Test procedure

The test scenario comprises of two NR carriers and one cell on each carrier as given in tables 19.2.1.2.4.1-3 and 19.2.1.2.5-1. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and start to transmit the PRACH to Cell 2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the RRC Reconfiguration message. Cell 1 is the active cell.
2. Set the parameters according to T1 in Table 19.2.1.2.5-1. Propagation conditions are set according to Annex C clause C.2.2. T1 starts.
3. SS shall transmit an RRCReconfiguration message implying handover to Cell 2.
4. The start of T2 is the instant when the last TTI containing the RRC reconfiguration message implying handover is sent to the UE, at that instant the SS shall switch the power settings from T1 to T2 as specified in Table 19.2.1.2.5-1. T2 starts.
5. If the UE transmits the uplink PRACH channel to Cell 2 less than 132 ms from the beginning of time period T2 then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
6. The UE shall transmit *RRCReconfigurationComplete* message on Cell 2.
7. After T2 expires, cause UE handover back to Cell 1 (if the handover fails, switch off the UE) or switch off the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Cell 1 is the active cell.
8. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008) for next iteration of the test procedure loop.
9. Repeat step 2-8 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

19.2.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

Table 19.2.1.2.4.3-1: Common Exception messages

Default Message Contents	
Common contents of system information blocks exceptions	
Default RRC messages and information elements contents exceptions	Table H.3.2-2 with Condition RBConfig_KeyChange

19.2.1.2.5 Test requirements

Table 19.2.1.2.5-1 defines the primary level settings for all tests.

Table 19.2.1.2.5-1: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter	Unit	Cell 1	Cell 2

			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1	MHz	10: $N_{RB,c}$ = 52			
	Config 2		10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98		-98	
N_{oc} Note2	Config 1,2	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s / I_{ot}$		dB	4+TT	4+TT	-Infinity	5+TT
$\hat{E}_s / N_{oc}$		dB	4+TT	4+TT	-Infinity	5+TT
SSB_RP	Config 1,2	dBm/SCS	-94+TT	-94+TT	-Infinity	-93+TT
	Config 3	dBm/SCS	-91+TT	-91+TT	-Infinity	-90+TT
Io Note3	Config 1,2	dBm/ 9.36MHz	-64.59+TT	-64.59+TT	-70.05	-63.85+TT
	Config 3	dBm/ 38.16MHz	-58.49+TT	-58.49+TT	-63.94+TT	-57.75+TT
Propagation condition	Config 1, 2	-	AWGN + 220Hz		AWGN + 220Hz	

	Config 3	-	AWGN + 500Hz	AWGN + 500Hz
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

The UE shall start to transmit the PRACH to Cell 2 less than 132 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 122 ms in the test. $T_{interrupt}$ is defined in clause 6.1E.1.2.2.

This gives a total of 132 ms.

19.2.2 Conditional Handover for ATG

19.2.2.0 Minimum conformance requirements

19.2.2.0.1 Minimum conformance requirements for NR FR1 – NR FR1 conditional handover

[TS 38.133, clause 6.1E.2.2.1]

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [2]. UE shall start RRM measurement before the distance condition is met if the *condEventD1* is configured to UE, the distance condition is defined in clause 5.5.4 in TS 38.331[2]. When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{CHO} seconds from the end of the last TTI containing the RRC command.

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

Where:

T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [2].

T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover.

$T_{measure}$ is the measurements time stated in TS 38.133 [6] clause 6.1E.2.2.2.

$T_{CHO_execution}$ is the conditional execution preparation time in TS 38.133 [6] clause 6.1E.2.2.3.

$T_{interrupt}$ is the interruption time stated in TS 38.133 [6] clause 6.1E.2.2.4.

The conditional handover delay requirements are applied if both condition D1-1 and condition D1-2 are fulfilled before the end of $T_{measure}$ for location-based CHO, otherwise no CHO requirement is applied.

[TS 38.133, clause 6.1E.2.2.2]

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a handover to a target cell and interruption time starts.

For intra-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify\ intra\ with\ index}$ or $T_{identify_intra_without_index}$ defined in TS 38.133 [6] clause 9.2D.5.1 or clause 9.2D.6.2.

For location-based conditional intra-frequency handover:

- If both condition D1-1 and condition D1-2 are fulfilled earlier than T_{Event_DU} + $T_{identify_intra_with_index}$ or T_{Event_DU} + $T_{identify_intra_without_index}$, then the measurement time delay equal to $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$ assuming UE only performs measurements within SMTC window of the target cell.

- If both condition D1-1 and condition D1-2 are fulfilled is later than T_{Event_DU} plus $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$ for intra-frequency handover, then the measurement time delay equal to the time from the end of T_{event_DU} until time when both condition D1-1 and condition D1-2 are fulfilled.

For inter-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$ defined in TS 38.133 [6] clause 9.3D.4.

For location-based conditional inter-frequency handover,

- If both condition D1-1 and condition D1-2 are fulfilled earlier than the time at the end of T_{Event_DU} + $T_{identify_inter_with_index}$ or T_{Event_DU} + $T_{identify_inter_without_index}$, then the measurement time delay equal to $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$, assuming that the UE uses only the SMTC window of the target inter-frequency carrier for performing the measurements.

- If both condition D1-1 and condition D1-2 are fulfilled later than the time at the end of T_{Event_DU} + $T_{identify_inter_with_index}$ or T_{Event_DU} + $T_{identify_inter_without_index}$, then the measurement time delay equal to the time from the end of T_{event_DU} until time of both condition D1-1 and condition D1-2 are fulfilled.

When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ for inter-frequency handover. If a cell which has been detectable at least for the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ for inter-frequency handover becomes undetectable for a period and then the cell becomes detectable again and triggers a handover, the measurement time delay shall be less than $T_{SSB_measurement_period_intra}$ or $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

[TS 38.133, clause 6.1E.2.2.3]

$T_{CHO_execution}$ is the UE execution preparation time for conditional handover, and starts after UE realizes the condition of CHO is met and identity of the target cell is determined. $T_{CHO_execution}$ can be up to 10ms.

[TS 38.133, clause 6.1E.2.2.4]

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional conditional handover, the interruption time shall be less than

$$T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3]

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cellin the handover command, otherwise Trs is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with T_{rs}=5ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been

provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

The normative reference for this requirement is TS 38.133 [6] clause 6.1E.2.2.

19.2.2.1 Intra-frequency distance-based conditional Handover from FR1 to FR1

Editor's Note: This test case is incomplete for the following configurations:

- Test procedure needs to be updated
- Message contents is TBD
- TT analysis is missing.
- Test applicability needs to be updated

19.2.2.1.1 Test purpose

To verify the requirememt for the NR FR1-NR FR1 intra-frequency distance-based conditional handover for ATG requirements specified in 38.133 [6] 6.1E.2.2.

19.2.2.1.2 Test applicability

This test applies to all types of NR ATG UE release 18 onwards and supporting conditional handover.

19.2.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.2.2.1.

19.2.2.1.4 Test description

19.2.2.1.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 19.2.2.1.4.1-1.

Table 19.2.2.1.4.1-1: NR ATG SA FR1 distance-based conditional handover test configurations

Config	Description
19.2.2.1-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
19.2.2.1-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
19.2.2.1-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note1: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 19.2.2.1.4.1-2

Table 19.2.2.1.4.1-2: Initial conditions for NR ATG SA FR1 distance-based conditional handover

Parameter	Value	Comment
Test environment	NC	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table [TBD] and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 19.2.1.1.4.1-1	

Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 19.2.2.1.4.3.

2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.

3. The test parameters are given in Tables 19.2.2.1.4.1-3 and 19.2.2.1.5-1 below.

Table 19.2.2.1.4.1-3: General test parameters NR ATG SA FR1 Intra-frequency distance-based conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
RF Channel Number			1	
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
UE position (N,S, H) at T1 start			(0, 0, 3000)	Set by AT command
UE moving speed		km/h	(1200, 0, 0)	Set by AT command
referenceLocation1-r17.condEventD1-r17		m	(-4600, 0, 0)	Reference location for serving cell
referenceLocation2-r17.condEventD1-r17		m	(14479, 0, 0)	Reference location for target cell
distanceThreshFromReference1-r17.condEventD1-r17		50m	200	D1-1 Location condition is fulfilled at T2
distanceThreshFromReference2-r17.condEventD1-r17		50m	200	D1-2 Location condition is fulfilled at T2
hysteresis-r17.condEventD1-r17		10m	0	
timeToTrigger-r17.condEventD1-r17		s	0	
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	not barred	No additional delays in random access procedure.
Time offset between cells			3 μs	Synchronous cells
T1		s	15	
T2		s	≤ 6	

19.2.2.1.4.2 Test procedure

The test scenario comprises of 2 NR carrier and two cells, Cell 1 and Cell 2, on each carrier respectively. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 19.2.2.1.4.1-3 and 19.2.2.1.5-1 respectively. Measurement gap (gap pattern #0) is configured in the test case.

The test consists of two successive time periods, with time durations of T1 and T2 respectively.

Time interval T1 needs to start immediately after the UE position and moving speed are configured via AT commands. The UE is configured to measure intra-frequency neighbour cell. The RRC message implying distance-based handover to Cell 2 with Event D1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2. where

- T_{RRC} = 10ms, is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

From start of T2, the Cell 2 becomes detectable and offset better than Cell 1 and location condition event condEventD1-r17 is is satisfied. During T2, the UE performs measurement on Cell 2 and evaluates the execution condition, and starts handover procedure when execution condition is satisifed. The UE shall sent PRACH to Cell 2 less than $T_{measure}$ + $T_{CHO_execution}$ + $T_{interrupt}$ ms from the start of T2. The Interruption length $T_{interrupt}$ shall also be verified in T2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the

RRCReconfiguration message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 19.2.2.1.5-1. Propagation conditions are set according to Annex C clause C.2.2. UE position and moving speed are configured on the UE via AT commands. Immediately after that, T1 starts. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.
3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008).
4. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure distanced-based CHO execution condition and measurement gap pattern #0 for the UE.
5. The UE shall transmit an *RRCReconfigurationComplete* message.
6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 19.2.2.1.5-1. T2 starts.
7. If

   a) the UE transmits the PRACH preambles to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the beginning of time period T2,

   and

   b) no longer than X consecutive ACK/NACK DTXs are observed by the SS from the start of T2 to the instant the UE transmits the first PRACH preamble, where

   - $X = T_{interrupt} + k_1$ for test configuration 19.2.2.1-1
   - $X = T_{interrupt}$ for test configuration 19.2.2.1-2
   - $X = 2 \cdot T_{interrupt}$ for test configuration 19.2.2.1-3.

   then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.
8. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.
9. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.
10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

19.2.2.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

TBD

19.2.2.1.5 Test requirements

Table 19.2.2.1.5-1 defines the primary level settings for all tests.

Table 19.2.2.1.5-1: Cell specific test parameters for NR ATG SA FR1 Intra-frequency distance-based conditional handover from FR1 to FR1

Parameter	Test configuration	Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Duplex mode	Config 1		FDD			
	Config 2, 3		TDD			
TDD configuration	Config 1		Not Applicable			

		Config 2		TDDConf.1.1			
		Config 3		TDDConf.2.1			
$BW_{channel}$		Config 1, 2	MHz	10: $N_{RB,c}$ = 52			
		Config 3		40: $N_{RB,c}$ = 106			
BWP BW		Config 1, 2	MHz	10: $N_{RB,c}$ = 52			
		Config 3		40: $N_{RB,c}$ = 106			
DRX Cycle		Config 1, 2, 3	ms	Not Applicable			
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD			
		Config 2		SR.1.1 TDD			
		Config 3		SR.2.1 TDD			
CORESET Reference Channel		Config 1		CR.1.1 FDD			
		Config 2		CR.1.1 TDD			
		Config 3		CR.2.1 TDD			
TRS configuration		Config 1		TRS.1.1 FDD			
		Config 2		TRS.1.1 TDD			
		Config 3		TRS.1.2 TDD			
OCNG Patterns		Config 1, 2, 3		OP.1			
SMTC Configuration		Config 1, 2, 3		SMTC.1			
SSB Configuration		Config 1, 2		SSB.1 FR1			
		Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing		Config 1, 2	kHz	15 kHz			
		Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing		Config 1, 3	kHz	15 kHz			
		Config 3		30 kHz			
PRACH configuration		Config 1, 2, 3		FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP	Config 1, 2, 3		DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS		Config 1, 2, 3	dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		Config 1, 2, 3	dBm/ 15kHz	-98			
N_{oc} Note2		Config 1, 2	dBm/ SCS	-98			
		Config 3		-95			
$\hat{E}_s / I_{ot}$		Config 1, 2, 3	dB	8+TT	-3.3+TT	-Infinity	2.36+TT
$\hat{E}_s / N_{oc}$		Config 1, 2, 3	dB	8+TT	8+TT	-Infinity	11+TT
SSB_RP		Config 1, 2	dBm/ SCS	-90+TT	-90+TT	-Infinity	-87+TT
		Config 3		-87+TT	-87+TT	-Infinity	-84+TT
Io Note3		Config 1, 2	dBm/ 9.36MHz	-61.41+TT	-57.06+TT	-61.41+TT	-57.06+TT
		Config 3	dBm/ 38.16MHz	-55.31+TT	-50.96+TT	-55.31+TT	-50.96+TT
Propagation condition		Config 1, 2	-	AWGN + 2412Hz Note4			

	Config 3		AWGN + 5556Hz[Note5]

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: 2412Hz is the maximum value of doppler with carrier frequency of 2170MHz. The specific doppler shift trajectory is up to test system's design considering of BS location and UE GNSS emulation.
Note 5: 5556Hz is the maximum value of doppler with carrier frequency of 5GHz. The specific doppler shift trajectory is up to test system's design considering of BS location and UE GNSS emulation.

The UE shall start to transmit the PRACH to Cell 2 less than 872 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in TS 38.133 [6] clause 6.1E.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay T_{RRC} = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{Event_DU} = start of T2

At start of T2,

distance to source cell reference location is $\sqrt{(3000)^2 + (1200 * 1000/3600 * 15 - (-4600))^2}$ = 10057.8m, and D1-1 = 10000m

distance to target cell reference location is $\sqrt{(3000)^2 + (1200 * 1000/3600 * 15 - (14479))^2}$ = 9942.4m, and D1-2 = 10000m

i.e. D1-1 and D1-2 conditions are fulfilled at start of T2 with >=50m location margin.

$T_{measure}$ = max(600 + 200 ms, 0) = 800 ms;

$T_{interrupt}$ = 62ms; $T_{CHO_execution}$ = 10ms.

This gives a total of 800ms + 62ms + 10ms = 872 ms.

19.2.2.2 Inter-frequency distance-based conditional Handover from FR1 to FR1

Editor's Note: This test case is incomplete for the following configurations:

- Test procedure needs to be updated
- Message contents is TBD
- TT analysis is missing.
- Test applicability needs to be updated

19.2.2.2.1 Test purpose

To verify the requirememt for the NR FR1-NR FR1 inter-frequency distance-based conditional handover for ATG requirements specified in 38.133 [6] 6.1E.2.2.

19.2.2.2.2 Test applicability

This test applies to all types of NR ATG UE release 18 onwards and supporting distance-based conditional handover.

19.2.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.2.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.2.2.2.

19.2.2.2.4 Test description

19.2.2.2.4.1 Initial conditions

Initial conditions are a set of test configurations the UE needs to be tested in and the steps for the SS to take with the UE to reach the correct measurement state.

This test shall be tested using any of the test configurations in Table 19.2.2.2.4.1-1.

Table 19.2.2.2.4.1-1: NR ATG SA FR1 distance-based conditional handover test configurations

Config	Description
19.2.2.2-1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
19.2.2.2-2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
19.2.2.2-3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note1: The UE is only required to be tested in one of the supported test configurations.	

Configure the test equipment and the DUT according to the parameters in Table 19.2.2.2.4.1-2

Table 19.2.2.2.4.1-2: Initial conditions for NR ATG SA FR1 distance-based conditional handover

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table [TBD] and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.2.1.1.4.1-1		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part	A.3.1.8.2	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. Message contents are defined in clause 19.2.2.2.4.3.
2. The power levels and settings for NR Cell 1 are set according to Annex C.1.2 and C.1.3. Cell 2 is NR FR1 target Cell, and its power levels and settings are also set according to Annex C.1.2 and C.1.3.
3. The test parameters are given in Tables 19.2.2.2.4.1-3 and 19.2.2.2.5-1 below.

Table 19.2.2.2.4.1-3: General test parameters NR ATG SA FR1 Inter-frequency distance-based conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
UE position (N,S, H) at T1 start			(0, 0, 3000)	Set by AT command
UE moving speed		km/h	(1200, 0, 0)	Set by AT command
referenceLocation1-r17.condEventD1-r17		m	(-4600, 0, 0)	Reference location for serving cell
referenceLocation2-r17.condEventD1-r17		m	(14479, 0, 0)	Reference location for target cell
distanceThreshFromReference1-r17.condEventD1-r17		50m	200	D1-1 Location condition is fulfilled at T2

distanceThreshFromReference2-r17.condEventD1-r17	50m	200	D1-2 Location condition is fulfilled at T2
hysteresis-r17.condEventD1-r17	10m	0	
timeToTrigger-r17.condEventD1-r17	s	0	
A3-Offset in condition	dB	-4	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	not barred	No additional delays in random access procedure.
Time offset between cells		3 μs	Synchronous cells
T1	s	5	
T2	s	≤ 16	

19.2.2.2.4.2 Test procedure

The test scenario comprises of 2 NR carrier and two cells, Cell 1 and Cell 2, on each carrier respectively. General parameters and Cell-specific parameters for Cell 1 and Cell 2 are given in Table 19.2.2.2.4.1-3 and 19.2.2.2.5-1 respectively. Measurement gap (gap pattern #0) is configured in the test case.

The test consists of two successive time periods, with time durations of T1 and T2 respectively.

Time interval T1 needs to start immediately after the UE position and moving speed are configured via AT commands. During T1, the UE is configured to measure inter-frequency neighbour cell and Gap pattern ID gp0. The RRC message implying distance-based handover to Cell 2 with Event D1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2. where

- T_{RRC} = 10ms, is the RRC procedure delay defined in clause 12 in TS 38.331 [13].

From start of T2, the Cell 2 becomes detectable and offset better than Cell 1 and after 9976ms of T2, location condition event condEventD1-r17 is satisfied. During T2, the UE performs measurement on Cell 2 and evaluates the execution condition, and starts handover procedure when execution condition is satisifed. The UE shall sent PRACH to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the start of T2. The Interruption length $T_{interrupt}$ shall also be verified in T2.

1. Ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5. Establish SRB2 and DRB in the *RRCReconfiguration* message. Cell 1 is the active cell. Set Cell 2 physical cell identity to the initial physical cell identity.

2. Set the parameters according to T1 in Table 19.2.2.2.5-1. Propagation conditions are set according to Annex C clause C.2.2. UE position and moving speed are configured on the UE via AT commands. Immediately after that, T1 starts. The SS starts continuously scheduling the UE to perform DL reception in every DL slot on Cell 1 and monitoring corresponding ACK/NACK feedbacks sent by the UE.

3. Set Cell 2 physical cell identity = ((current cell 2 physical cell identity + 1) mod 1008).

4. The SS shall transmit an *RRCReconfiguration* message with *conditionalReconfiguration* on Cell 1 to configure distanced-based CHO execution condition and measurement gap pattern #0 for the UE.

5. The UE shall transmit an *RRCReconfigurationComplete* message.

6. When T1 expires, the SS shall switch the power setting from T1 to T2 as specified in Table 19.2.2.2.5-1. T2 starts.

7. If

   c) the UE transmits the PRACH preambles to Cell 2 less than $T_{measure} + T_{CHO_execution} + T_{interrupt}$ ms from the beginning of time period T2,

   and

   d) no longer than X consecutive ACK/NACK DTXs are observed by the SS from the start of T2 to the instant the UE transmits the first PRACH preamble, where

   - $X = T_{interrupt} + k_1$ for test configuration 19.2.2.2-1

- $X = T_{interrupt}$ for test configuration 19.2.2.2-2
- $X = 2 \cdot T_{interrupt}$ for test configuration 19.2.2.2-3.

then the number of successful tests is increased by one. Otherwise, the number of failure tests is increased by one.

8. After T2 expires, the SS sends an *RRCReconfiguration* with *reconfigurationWithSync* to cause UE handover back to Cell 1.
9. If UE is not in state RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1, switch off and on the UE. Then ensure the UE is in State RRC_CONNECTED with generic procedure parameters Connectivity *NR*, Connected without release *On* according to TS 38.508-1 [14] clause 4.5 on Cell 1.
10. Repeat steps 2-9 until the confidence level according to Tables G.2.3-1 in Annex G clause G.2 is achieved.

19.2.2.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

TBD

19.2.2.2.5 Test requirements

Table 19.2.2.2.5-1 defines the primary level settings for all tests.

Table 19.2.2.2.5-1: Cell specific test parameters for NR ATG SA FR1 Intra-frequency distance-based conditional handover from FR1 to FR1

Parameter	Test configuration	Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Duplex mode	Config 1		FDD			
	Config 2, 3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
$BW_{channel}$	Config 1, 2	MHz	10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
BWP BW	Config 1, 2	MHz	10: $N_{RB,c}$ = 52			
	Config 3		40: $N_{RB,c}$ = 106			
DRX Cycle	Config 1, 2, 3	ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns	Config 1, 2, 3		OP.1			
SMTC Configuration	Config 1, 2, 3		SMTC.1			
SSB Configuration	Config 1, 2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1, 3	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration	Config 1, 2, 3		FR1 PRACH configuration 1			
Initial DL BWP	Config 1, 2, 3		DLBWP.0.1			

BWP configuration	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS		Config 1, 2, 3	dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		Config 1, 2, 3	dBm/ 15kHz	-98			
N_{oc} Note2		Config 1, 2	dBm/ SCS	-98			
		Config 3		-95			
$\hat{E}_s / I_{ot}$		Config 1, 2, 3	dB	8+TT	-3.3+TT	-Infinity	2.36+TT
$\hat{E}_s / N_{oc}$		Config 1, 2, 3	dB	8+TT	8+TT	-Infinity	11+TT
SSB_RP		Config 1, 2	dBm/ SCS	-90+TT	-90+TT	-Infinity	-87+TT
		Config 3		-87+TT	-87+TT	-Infinity	-84+TT
Io Note3		Config 1, 2	dBm/ 9.36MHz	-61.41+TT	-57.06+TT	-61.41+TT	-57.06+TT
		Config 3	dBm/ 38.16MHz	-55.31+TT	-50.96+TT	-55.31+TT	-50.96+TT
Propagation condition		Config 1, 2	-	AWGN + 2412Hz Note4			
		Config 3		AWGN + 5556Hz Note5			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4: 2412Hz is the maximum value of doppler with carrier frequency of 2170MHz. The specific doppler shift trajectory is up to test system's design considering of BS location and UE GNSS emulation.
Note 5: 5556Hz is the maximum value of doppler with carrier frequency of 5GHz. The specific doppler shift trajectory is up to test system's design considering of BS location and UE GNSS emulation.

The UE shall start to transmit the PRACH to Cell 2 less than 872 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in TS 38.133 [6] clause 6.1E.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay T_{RRC} = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{Event_DU} = start of T2

At start of T2,

distance to source cell reference location is $\sqrt{(3000)^2 + (1200 * 1000/3600 * 15 - (-4600))^2}$ = 10057.8m, and D1-1 = 10000m

distance to target cell reference location is $\sqrt{(3000)^2 + (1200 * 1000/3600 * 15 - (14479))^2}$ = 9942.4m, and D1-2 = 10000m

i.e. D1-1 and D1-2 conditions are fulfilled at start of T2 with >=50m location margin.

$T_{measure}$ = max(600 + 200 ms, 0) = 800 ms;

$T_{interrupt}$ = 62ms; $T_{CHO_execution}$ = 10ms.

This gives a total of 800ms + 62ms + 10ms = 872 ms.

19.4 Signalling characteristics for ATG

19.4.1 Radio link monitoring for ATG

19.4.1.0 Minimum conformance requirements

19.4.1.0.1 Minimum conformance requirements for SSB based RLM

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_SSB}$ period becomes worse than the threshold Q_{out_SSB} within $T_{Evaluate_out_SSB}$ evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_SSB}$ period becomes better than the threshold Q_{in_SSB} within $T_{Evaluate_in_SSB}$ evaluation period.

$T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ are defined in table 19.4.1.0.1-1 for FR1.

For FR1 ATG UE with one or multiple omni-directional antenna(s),

- $P = \frac{1}{1-\frac{T_{SSB}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency or inter-frequency measurements, and these measurement gaps are overlapping with some but not all occasions of the SSB; and
- P = 1 when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR1 ATG UE with the antenna array,

- P value for an RLM-RS resource to be measured is defined as
  - $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ with $N_{available}$ = 0
  - N_{total} / $N_{available}$ with $N_{available}$ > 0
    - For a window W of duration max(T_{L1}, $MGRP_{max}$), where $MGRP_{max}$ is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:
    - N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
    - $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
    - $N_{available}$ is
      - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W

- T_{L1} is periodicity of the target RLM-RS
- $P_{sharing\ factor}$ = 3.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

Table 19.4.1.0.1-1: Evaluation period $T_{Evaluate_out_SSB}$ and $T_{Evaluate_in_SSB}$ for FR1

Configuration	$T_{Evaluate_out_SSB}$ (ms)	$T_{Evaluate_in_SSB}$ (ms)
no DRX	Max(200, Ceil(10 × P) × T_{SSB})	Max(100, Ceil(5 × P) × T_{SSB})
DRX cycle≤320 ms	Max(200, Ceil(15 × P) × Max(T_{DRX},T_{SSB}))	Max(100, Ceil(7.5 × P) × Max(T_{DRX},T_{SSB}))
DRX cycle>320 ms	Ceil(10 × P) × T_{DRX}	Ceil(5 × P) × T_{DRX}
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

19.4.1.0.2 Minimum conformance requirements for CSI-RS based RLM

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_out_CSI-RS}$ period becomes worse than the threshold Q_{out_CSI-RS} within $T_{Evaluate_out_CSI-RS}$ evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{Evaluate_in_CSI-RS}$ period becomes better than the threshold Q_{in_CSI-RS} within $T_{Evaluate_in_CSI-RS}$ evaluation period.

- $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ are defined in table 19.4.1.0.2-1 for FR1.

The requirements of $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ apply provided that the CSI-RS for RLM is not in a resource set configured with repetition ON. The requirements do not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for RLM and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR1 ATG UE with one or multiple omni-directional antenna(s),

- $P = \frac{1}{1-\frac{T_{CSI-RS}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency or inter-frequency measurements, and these measurement gaps are overlapping with some but not all occasions of the CSI-RS; and
- P = 1, when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR1 ATG UE with the antenna array,

- P value for an RLM-RS resource to be measured is defined as

  $P_{sharing\ factor}$ * N_{total} / $N_{outside_MG}$ with $N_{available}$ = 0

  N_{total} / $N_{available}$ with $N_{available}$ > 0

  - For a window W of duration max(T_{L1}, $MGRP_{max}$), where $MGRP_{max}$ is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:
  - N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
  - $N_{outside_MG}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
  - $N_{available}$ is
    - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
  - T_{L1} is periodicity of the target RLM-RS
  - $P_{sharing\ factor}$ = 3.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

The values of M_{out} and M_{in} used in table 19.4.1.0.2-1 are defined as:

- M_{out} = 20 and M_{in} = 10, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth $\geqslant$ 24 PRBs.

Table 19.4.1.0.2-1: Evaluation period $T_{Evaluate_out_CSI\text{-}RS}$ and $T_{Evaluate_in_CSI\text{-}RS}$ for FR1

Configuration	$T_{Evaluate_out_CSI\text{-}RS}$ (ms)	$T_{Evaluate_in_CSI\text{-}RS}$ (ms)
no DRX	Max(200, Ceil(M_{out}×P)×$T_{CSI\text{-}RS}$)	Max(100, Ceil(M_{in}×P) × $T_{CSI\text{-}RS}$)
DRX ≤ 320 ms	Max(200, Ceil(1.5×M_{out}×P)× Max(T_{DRX}, $T_{CSI\text{-}RS}$))	Max(100, Ceil(1.5×M_{in}×P)× Max(T_{DRX}, $T_{CSI\text{-}RS}$))
DRX > 320 ms	Ceil(M_{out}×P) × T_{DRX}	Ceil(M_{in}×P) × T_{DRX}
NOTE: $T_{CSI\text{-}RS}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{CSI\text{-}RS}$ equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

19.4.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Message contents are FFS
- Test procedure is missing

19.4.1.1.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in TS 38.133 [6] clause 8.1D.

19.4.1.1.2 Test applicability

This test applies to all types of NR ATG UE from release 18.

19.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.4.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.4.1.1.

19.4.1.1.4 Test description

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 19.4.1.1.4-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40 ms) in test 1.

UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.

The specific gNB reference location is emulated by test system.

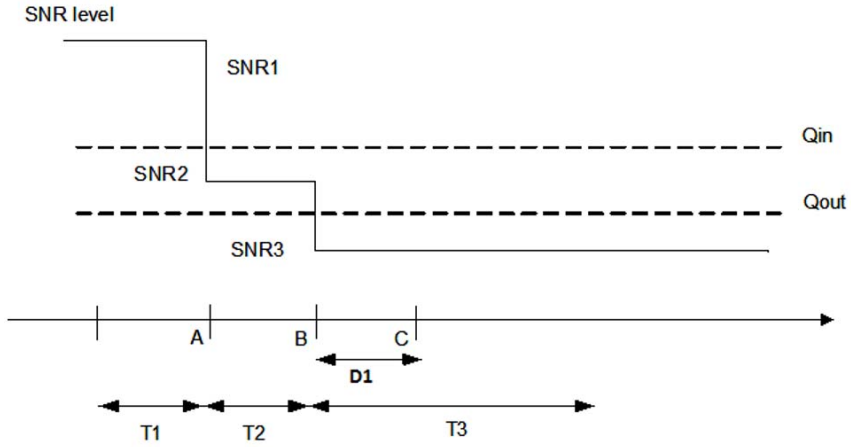

Figure 19.4.1.1.4-1: SNR variation for out-of-sync testing

19.4.1.1.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 19.4.1.1.4.1-1

Table 19.4.1.1.4.1-1: Supported test configurations

Configuration	Description
19.4.1.1-1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
19.4.1.1-2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
19.4.1.1-3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Test environment parameters are given in Table 19.4.1.1.4.1-2.

Table 19.4.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 19.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to tables 19.4.1.1.4.1-3 and 19.4.1.1.4.1-4.
2. Message contents are defined in clause 19.4.1.1.4.3.
3. There is one cell (Cell 1), which is the active NR cell, in the test.

Table 19.4.1.1.4.1-3: General test parameters for FR1 out-of-sync testing in non-DRX mode

Parameter			Unit	Value
				Test 1
Active PCell				Cell 1
RF Channel Number				1
Duplex mode		Config 1		FDD
		Config 2, 3		TDD
$BW_{channel}$		Config 1	MHz	10: $N_{PRB,c}$ = 52
		Config 2		10: $N_{PRB,c}$ = 52
		Config 3		40: $N_{PRB,c}$ = 106
DL initial BWP configuration		Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration		Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration		Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration		Config 1, 2, 3		ULBWP.1.1
TDD Configuration		Config 1		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
RMSI CORESET Reference Channel		Config 1		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel		Config 1		CCR.1.3 FDD
		Config 2		CCR.1.3 TDD
		Config 3		CCR.2.2 TDD
SSB Configuration		Config 1		SSB.1 FR1
		Config 2		SSB.1 FR1
		Config 3		SSB.2 FR1
SMTC Configuration		Config 1, 2		SMTC.1
		Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing		Config 1, 2		15 kHz
		Config 3		30 kHz
PRACH Configuration		Config 1, 2		Table A.3.8.2.1-1
		Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS				0
OCNG parameters				OP.1
CP length				Normal
Correlation Matrix and Antenna Configuration				2x2 Low
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX				*OFF*
Gap pattern ID				*gp0*
Layer 3 filtering				*Enabled*
T310 timer			ms	*0*
T311 timer			ms	1000
N310				1
N311				1
CSI-RS configuration for CSI reporting		Config 1		CSI-RS.1.1 FDD
		Config 2		CSI-RS.1.1 TDD
		Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking		Config 1		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
T1			s	0.2

Parameter	Unit	Value
		Test 1
T2	s	0.48
T3	s	0.48
D1	s	0.44
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts.		

Table 19.4.1.1.4.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
NOTE: Ensure that RLM RS is partially overlapped with measurement gap	

19.4.1.1.4.2 Test procedure

TBD

19.4.1.1.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 7.3 with the following exceptions:

TBD

19.4.1.1.5 Test requirements

Table 19.4.1.1.4.1-3, 19.4.1.1.5-1, and Table 19.4.1.1.5-2 defines the primary level settings for all tests.

Table 19.4.1.1.5-1: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1+TT	-7+TT	-15+TT
	Config 2		1+TT	-7+TT	-15+TT
	Config 3		1+TT	-7+TT	-15+TT
N_{oc}	Config 1	dBm/15 kHz	-98+TT		
	Config 2		-98+TT		
	Config 3		-98+TT		
N_{oc}	Config 1	dBm/SCS	-98+TT		
	Config 2		-98+TT		
	Config 3		-95+TT		
Propagation condition	Config 1, 2		AWGN+220 Hz		
	Config 3		AWGN+500 Hz		

Parameter	Unit	Test 1		
		T1	T2	T3
NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.				
NOTE 3: SNR levels correspond to the signal to noise ratio over the SSS REs.				
NOTE 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.19.4.1.1.1-1.				
NOTE 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.				

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90 % with the confidence level of 95%.

19.4.1.2 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Message contents are FFS
- Test procedure is missing

19.4.1.2.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in ts 38.133 [6] clause 8.1D.

19.4.1.2.2 Test applicability

This test applies to all types of NR UE from release 18 onwards.

19.4.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.4.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.4.1.2.

19.4.1.2.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.19.4.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

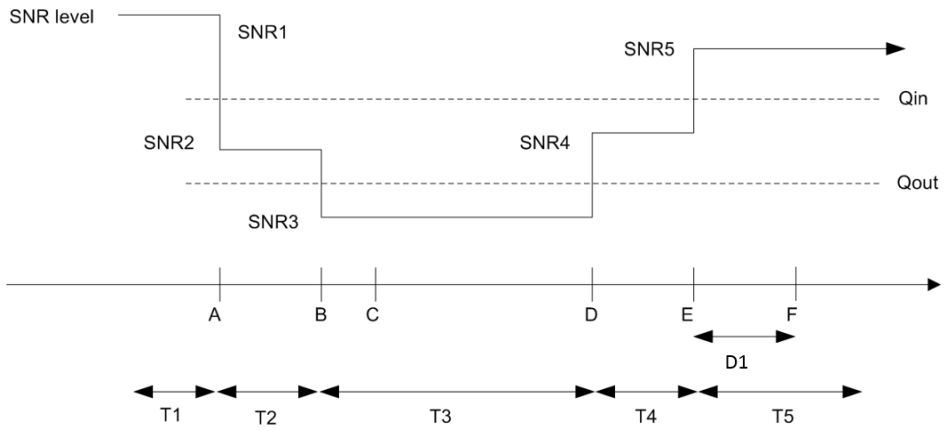

Figure 19.4.1.2.4: SNR variation for in-sync testing

19.4.1.2.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 19.4.1.2.4.1-1

Table 19.4.1.2.4.1-1: Supported test configurations

Configuration	Description
19.4.1.2-1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
19.4.1.2-2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
19.4.1.2-3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Test environment parameters are given in Table 19.4.1.2.4.1-2.

Table 19.4.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 19.4.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 19.4.1.2.4.1-3.
2. Message contents are defined in clause 19.4.1.2.4.3.
3. There is one cell (Cell 1), which is the active cell, in the test.

Table 19.4.1.2.4.1-3: General test parameters for for FR1 in-sync testing in non-DRX mode

Parameter	Unit	Value
		Test 1
Active PCell		Cell 1

Parameter		Unit	Value
			Test 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
$BW_{channel}$	Config 1	MHz	10: $N_{PRB,c}$ = 52
	Config 2		10: $N_{PRB,c}$ = 52
	Config 3		40: $N_{PRB,c}$ = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*

Parameter		Unit	Value
			Test 1
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts.			

19.4.1.2.4.2 Test procedure

TBD

19.4.1.2.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

TBD

19.4.1.2.5 Test requirements

Table 19.4.1.2.4.1-3, 19.4.1.2.5-1, and Table 19.4.1.2.5-2 defines the primary level settings for all tests.

Table 19.4.1.2.5-1: Cell specific test parameters for for FR1 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1+TT	-7+TT	-15+TT	-4.5+TT	1+TT
	Config 2		1+TT	-7+TT	-15+TT	-4.5+TT	1+TT
	Config 3		1+TT	-7+TT	-15+TT	-4.5+TT	1+TT
N_{oc}	Config 1	dBm/15 kHz	-98+TT				
	Config 2		-98+TT				
	Config 3		-98+TT				
N_{oc}	Config 1	dBm/SCS	-98+TT				

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
	Config 2		-98+TT				
	Config 3		-95+TT				
Propagation condition	Config 1, 2		AWGN +220 Hz				
	Config 3		AWGN +500 Hz				
NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
NOTE 3: SNR levels correspond to the signal to noise ratio over the SSS REs.							
NOTE 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.19.4.1.2.1-1.							
NOTE 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.							

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90 % with the confidence level of 95%.

19.4.1.3 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Message contents are FFS
- Test procedure is missing

19.4.1.3.1 Test purpose

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1D.

19.4.1.3.2 Test applicability

This test applies to all types of NR UE from release 18 onwards.

19.4.1.3.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.4.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.19.4.1.3.

19.4.1.3.4 Test description

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure 19.4.1.3.4-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40 ms) in test. In the test, SSB0 is configured as the BFD-RS.

UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.

The specific gNB reference location is emulated by test system.

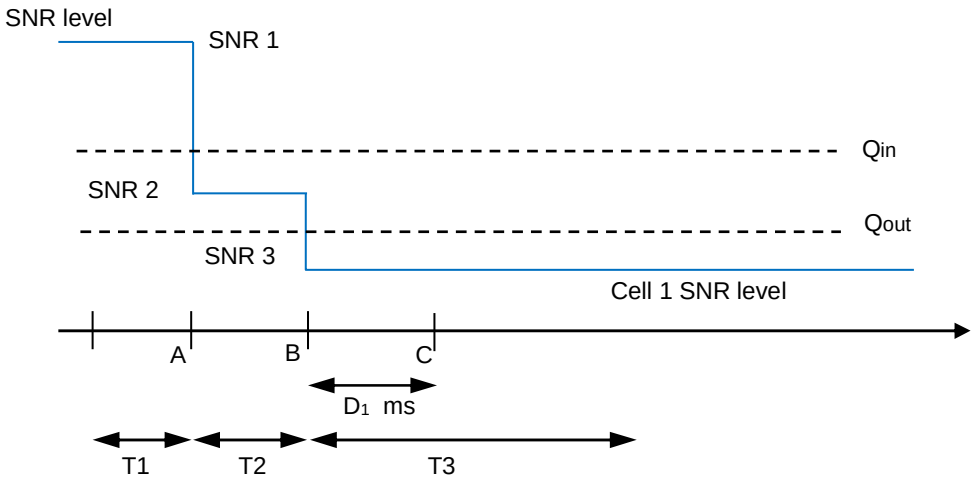

Figure 19.4.1.3.4-1: SNR variation for CSI-RS out-of-sync testing

19.4.1.3.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 19.4.1.3.4.1-1

Table 19.4.1.3.4.1-1: Supported test configurations

Configuration	Description
19.4.1.3-1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
19.4.1.3-2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
19.4.1.3-3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Test environment parameters are given in Table 19.4.1.3.4.1-2.

Table 19.4.1.3.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 19.4.1.3.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	TBD	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	TBD	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to tables 19.4.1.3.4.1-3 and 19.4.1.3.4.1-4.
2. Message contents are defined in clause 19.4.1.3.4.3.
3. There is one cell, Cell 1 which is the PCell, in the test.

Table 19.4.1.3.4.1-3: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter	Unit	Value
		Test 1
Active PCell		Cell 1

Parameter		Unit	Value
			Test 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			*gp0*
Layer 3 filtering			*Enabled*
T310 timer		ms	*0*
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.48

Parameter	Unit	Value
		Test 1
T3	s	0.48
D1	s	0.44
NOTE 1: UE-specific PDCCH is not transmitted after T1 starts.		

Table 19.4.1.3.4.1-4: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
NOTE 1: Void	

19.4.1.3.4.2 Test procedure

TBD

19.4.1.3.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

TBD

19.4.1.3.5 Test requirements

Table 19.4.1.3.4.1-3, 19.4.1.3.5-1, and Table 19.4.1.3.5-2 defines the primary level settings for all tests.

Table 19.4.1.3.5-1: NR Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB			
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1+TT	-7+TT	-15+TT
	Config 2		1+TT	-7+TT	-15+TT
	Config 3		1+TT	-7+TT	-15+TT
N_{oc}	Config 1	dBm/15 kHz	-98+TT		
	Config 2		-98+TT		
	Config 3		-98+TT		
Propagation condition	Config 1, 2		AWGN +220 Hz		
	Config 3		AWGN +500 Hz		

Parameter	Unit	Test 1		
		T1	T2	T3
NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.				
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.				
NOTE 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.				
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.				
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.				
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.				
NOTE 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.19.4.1.3.1-1.				
NOTE 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6].				

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90 % with the confidence level of 95%.

19.4.1.4 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode

Editor's Note: This test case is incomplete in following aspects:

- TT analysis is missing.
- Message contents are FFS
- Test procedure is missing

19.4.1.4.1 Test purpose

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in TS 38.133 [6] clause 8.1D.

19.4.1.4.2 Test applicability

This test applies to all types of NR ATG UE from release 18 onwards.

19.4.1.4.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.4.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.19.4.1.4.

19.4.1.4.4 Test description

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure 19.4.1.4.4-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.

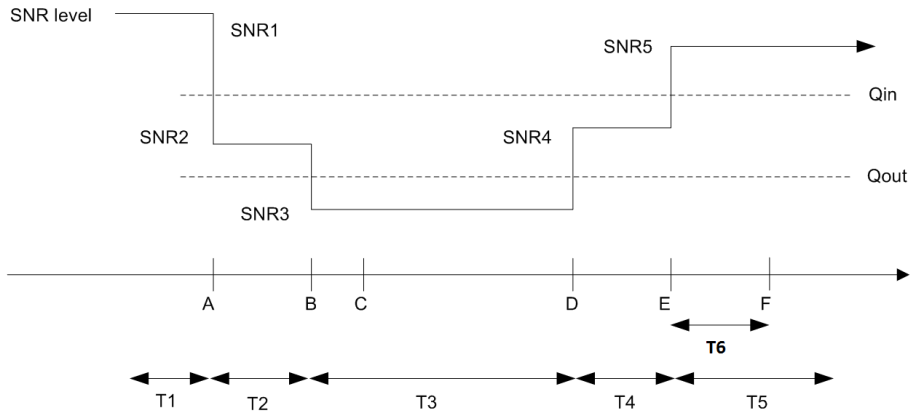

Figure 19.4.1.4.4-1: SNR variation for CSI-RS in-sync testing

19.4.1.4.4.1 Initial conditions

This test shall be tested using any of the test configurations in Table 19.4.1.4.4.1-1

Table 19.4.1.4.4.1-1: Supported test configurations

Configuration	Description
19.4.1.4-1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
19.4.1.4-2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
19.4.1.4-3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Test environment parameters are given in Table 19.4.1.4.4.1-2.

Table 19.4.1.4.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.5-1 and TS 38.508-1 [14] clause 7.2.3.		
Channel bandwidth	As specified by the test configuration selected from Table 19.4.1.4.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2
Connection Diagram	TE Part	A.3.1.7.1	As specified in TS 38.508-1 [14] Annex A.
	DUT Part	A.3.2.3.4	
Exceptions to connection diagram	N/A		

1. The general test parameter settings are set up according to Table 19.4.1.4.4.1-3.
2. Message contents are defined in clause 19.4.1.4.4.3.
3. There is one cell (Cell 1), which is the PCell in the test.

Table 19.4.1.4.4.1-3: General test parameters for for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter	Unit	Value
		Test 1
Active PCell		Cell 1

Parameter		Unit	Value
			Test 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			*OFF*
Gap pattern ID			N.A.
Layer 3 filtering			*Enabled*

Parameter		Unit	Value
			Test 1
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.44
T4		s	0.2
T5		s	0.88
T6		s	0.84
NOTE 1: UE-specific PDCCH is not transmitted after T1 starts.			

19.4.1.4.4.2 Test procedure

TBD

19.4.1.4.4.3 Message contents

Message contents are according to TS 38.508-1 [14] clause 4.6 with the following exceptions:

TBD

19.4.1.4.5 Test requirements

Table 19.4.1.4.4.1-3, 19.4.1.4.5-1, and Table 19.4.1.4.5-2 defines the primary level settings for all tests.

Table 19.4.1.4.5-1: NR Cell specific test parameters FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1+TT	-7+TT	-15+TT	-4.5+TT	1+TT
	Config 2		1+TT	-7+TT	-15+TT	-4.5+TT	1+TT
	Config 3		1+TT	-7+TT	-15+TT	-4.5+TT	1+TT
N_{oc}	Config 1	dBm/15 kHz	-98+TT				
	Config 2		-98+TT				
	Config 3		-98+TT				
	Config 1, 2		AWGN +220 Hz				

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
Propagation condition	Config 3		AWGN +500 Hz				
NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
NOTE 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
NOTE 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
NOTE 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
NOTE 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
NOTE 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
NOTE 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
NOTE 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.19.4.1.4.1-1.							
NOTE 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.							

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90 % with the confidence level of 95%.

19.6 Measurement Performance requirements for ATG

19.6.1 SS-RSRP for ATG

19.6.1.0 Minimum conformance requirements

19.6.1.0.1 Intra-frequency absolute SS-RSRP measurement accuracy requirements

Same as in clause 4.7.1.0.1.

19.6.1.0.2 Intra-frequency relative SS-RSRP measurement accuracy requirements

Same as in clause 4.7.1.0.2.

19.6.1.0.3 Inter-frequency absolute SS-RSRP measurement accuracy requirements

Same as in clause 4.7.1.0.3.

19.6.1.0.4 Inter-frequency relative SS-RSRP measurement accuracy requirements

Same as in clause 4.7.1.0.4.

19.6.1.1 Intra-frequency measurements for ATG

19.6.1.1.1 NR SA FR1 SS-RSRP absolute measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.1.1.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

19.6.1.1.1.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards.

19.6.1.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.1.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.1.1.

19.6.1.1.1.4 Test description

19.6.1.1.1.4.1 Initial conditions

Same as the Initial conditions given in clause 6.7.1.1.1.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.1.1.1.4.1-1 is replaced by Table 19.6.1.1.1.4.1-1;
- Table 6.7.1.1.1.4.1-2 is replaced by Table 19.6.1.1.1.4.1-2;

Table 19.6.1.1.1.4.1-1: Supported test configurations

Test Case ID	Description
19.6.1.1.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.1.1.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.1.1.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.1.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.1.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

19.6.1.1.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.1.1.4.2 with the following exceptions:

- Table 6.7.1.1.1.5-1 is replaced by Table 19.6.1.1.1.5-1.

19.6.1.1.1.4.3 Message contents

Same as the message contents given in clause 6.7.1.1.1.4.3.

19.6.1.1.1.5 Test requirement

Same as the test requirements given in clause 6.7.1.1.1.5 with following exceptions:

- Table 6.7.1.1.1.5-1 is replaced by Table 19.6.1.1.1.5-1.

Table 19.6.1.1.1.5-1: NR Cell specific test parameters (same as Table 6.7.1.1.1.5-1 with following exceptions)

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Propagation Condition		1,2	AWGN+220Hz			
		3	AWGN+500Hz			

19.6.1.1.2 NR SA FR1 SS-RSRP relative measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.1.1.2.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRP relative measurement accuracy is within the specified limits for all bands.

19.6.1.1.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards.

19.6.1.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.1.1.

19.6.1.1.2.4 Test description

19.6.1.1.2.4.1 Initial conditions

Same as the Initial conditions given in clause 6.7.1.1.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.1.1.2.4.1-1 is replaced by Table 19.6.1.1.2.4.1-1;
- Table 6.7.1.1.2.4.1-2 is replaced by Table 19.6.1.1.2.4.1-2;

Table 19.6.1.1.2.4.1-1: Supported test configurations

Test Case ID	Description
19.6.1.1.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.1.1.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD

19.6.1.1.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.1.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.1.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

19.6.1.1.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.1.2.4.2 with the following exceptions:

- Table 6.7.1.1.2.5-1 is replaced by Table 19.6.1.1.2.5-1.

19.6.1.1.2.4.3 Message contents

Same as the message contents given in clause 6.7.1.1.2.4.3.

19.6.1.1.2.5 Test requirement

Same as the test requirements given in clause 6.7.1.1.2.5 with following exceptions:

- Table 6.7.1.1.2.5-1 is replaced by Table 19.6.1.1.2.5-1.

Table 19.6.1.1.2.5-1: NR Cell specific test parameters (Same as Table 6.7.1.1.1.5-1 with exceptions given in Table 6.7.1.1.2.5-1, as well as the following exceptions)

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Propagation Condition		1,2	AWGN+220Hz			
		3	AWGN+500Hz			

19.6.1.2 Inter-frequency measurements for ATG

19.6.1.2.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.1.2.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP absolute measurement accuracy is within the specified limits for all bands.

19.6.1.2.1.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards.

19.6.1.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.1.2.

19.6.1.2.1.4 Test description

19.6.1.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.1.2.1.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.1.2.1.4.1-1 is replaced by Table 19.6.1.2.1.4.1-1.
- Table 6.7.1.2.1.4.1-2 is replaced by Table 19.6.1.2.1.4.1-2.

Table 19.6.1.2.1.4.1-1: Supported test configurations

Test Case ID	Description
19.6.1.2.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.1.2.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.1.2.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.1.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] sclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.1.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

19.6.1.2.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.1.1.4.2 with following exceptions:

- Table 6.7.1.1.1.5-1 is replaced by Table 19.6.1.2.1.5-1.
- Table 6.7.1.1.1.5-2 is replaced by Table 6.7.1.2.1.5-2.

19.6.1.2.1.4.3 Message contents

Same as the message contents given in clause 6.7.1.2.1.4.3.

19.6.1.2.1.5 Test requirement

Same as the test requirements given in clause 6.7.1.2.1.5 with following exceptions:

- Table 6.7.1.2.1.5-1 is replaced by Table 19.6.1.2.1.5-1.

Table 19.6.1.2.1.5-1: NR Cell specific test parameters (Same as Table 6.7.1.2.1.5-1 with following exceptions)

Parameter	Test configuration	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Propagation Condition	Config 1,2	-	AWGN+220Hz		AWGN+220Hz	
	Config 3	-	AWGN+500Hz		AWGN+500Hz	

19.6.1.2.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.1.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP relative measurement accuracy is within the specified limits for all bands.

19.6.1.2.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards.

19.6.1.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.1.2.

19.6.1.2.2.4 Test description

19.6.1.2.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.1.2.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.1.2.2.4.1-1 is replaced by Table 19.6.1.2.2.4.1-1.
- Table 6.7.1.2.2.4.1-2 is replaced by Table 19.6.1.2.2.4.1-2.

Table 19.6.1.2.2.4.1-1: Supported test configurations

Test Case ID	Description
19.6.1.2.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.1.2.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.1.2.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.1.2.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.1.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

19.6.1.2.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.1.2.4.2 with following exceptions:

- Table 6.7.1.1.2.5-1 is replaced by Table 19.6.1.2.2.5-1.
- Table 6.7.1.1.2.5-2 is replaced by Table 6.7.1.2.2.5-2.

19.6.1.2.2.4.3 Message contents

Same as the message contents given in clause 6.7.1.2.1.4.3.

19.6.1.2.2.5 Test requirement

Same as the test requirements given in clause 6.7.1.2.2.5 with following exceptions:

- Table 6.7.1.2.2.5-1 is replaced by Table Table 19.6.1.2.2.5-1.

Table 19.6.1.2.2.5-1: NR Cell specific test parameters (same as Table 6.7.1.2.1.5-1 with following exceptions)

Parameter	Test configuration	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Propagation Condition	Config 1,2	-	AWGN+220Hz		AWGN+220Hz	
	Config 3	-	AWGN+500Hz		AWGN+500Hz	

19.6.2 SS-RSRQ for ATG

19.6.2.0 Minimum conformance requirements

19.6.2.0.1 Intra-frequency SS-RSRQ measurement accuracy requirements

Same as in clause 4.7.2.0.1.

19.6.2.0.2 Inter-frequency SS-RSRQ absolute measurement accuracy requirements

Same as in clause 4.7.2.0.2.

19.6.2.0.3 Inter-frequency SS-RSRQ relative measurement accuracy requirements

Same as in clause 4.7.2.0.3.

19.6.2.1 NR SA FR1 SS-RSRQ absolute measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.2.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-RSRQ measurement accuracy is within the specified limits for all bands.

19.6.2.1.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards.

19.6.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.2.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.2.1.

19.6.2.1.4 Test description

19.6.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.2.1.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.2.1.4.1-1 is replaced by Table 19.6.2.1.4.1-1;
- Table 6.7.2.1.4.1-2 is replaced by Table 19.6.2.1.4.1-2;

Table 19.6.2.1.4.1-1: Supported test configurations

Test Case ID	Description
19.6.2.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.2.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.2.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.2.1.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 19.6.2.1.4.1-1.	
Propagation conditions	AWGN	As specified in Annex C.2.2.

Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

19.6.2.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.2.1.4.2 with following exceptions:

- Table 6.7.2.1.5-1 is replaced by Table 19.6.2.1.5-1;
- Table 6.7.2.1.5-2 is replaced by Table 19.6.2.1.5-2;

19.6.2.1.4.3 Message contents

Same as the message contents given in clause 6.7.2.1.4.3.

19.6.2.1.5 Test requirement

Same as the test requirements given in clause 6.7.2.1.5 with following exceptions:

- Table 6.7.2.1.5-1 is replaced by Table 19.6.2.1.5-1;

Table 19.6.2.1.5-1: NR Cell specific test parameters (Same as Table 6.7.2.1.5-1 with following exceptions)

Parameter	Test configuration	Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Propagation Condition	Config 1,2	-	AWGN+220Hz		AWGN+220Hz		AWGN+220Hz	
	Config 3	-	AWGN+500Hz		AWGN+500Hz		AWGN+500Hz	

19.6.2.2 Inter-frequency SS-RSRQ measurements for ATG

19.6.2.2.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.2.2.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRQ absolute measurement accuracy is within the specified limits for all bands.

19.6.2.2.1.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards.

19.6.2.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.2.2.

19.6.2.2.1.4 Test description

19.6.2.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.2.2.1.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.2.2.1.4.1-1 is replaced by Table 19.6.2.2.1.4.1-1.
- Table 6.7.2.2.1.4.1-2 is replaced by Table 19.6.2.2.1.4.1-2.

Table 19.6.2.2.1.4.1-1: Supported test configurations

Test Case ID	Description
19.6.2.2.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.2.2.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.2.2.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.2.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] sclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.2.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

19.6.2.2.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.2.1.1.4.2 with following exceptions:

- Table 6.7.2.1.1.5-1 is replaced by Table 19.6.2.2.1.5-1.
- Table 6.7.2.1.1.5-2 is replaced by Table 6.7.2.2.1.5-2.

19.6.2.2.1.4.3 Message contents

Same as the message contents given in clause 6.7.2.2.1.4.3.

19.6.2.2.1.5 Test requirement

Same as the test requirements given in clause 6.7.2.2.1.5 with following exceptions:

- Table 6.7.2.2.1.5-1 is replaced by Table 19.6.2.2.1.5-1.

Table 19.6.2.2.1.5-1: NR Cell specific test parameters (Same as Table 6.7.2.2.1.5-1 with following exceptions)

Parameter	Test configuration	Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Propagation Condition	Config 1,2	-	AWGN+220Hz		AWGN+220Hz		AWGN+220Hz	
	Config 3	-	AWGN+500Hz		AWGN+500Hz		AWGN+500Hz	

19.6.2.2.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.2.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-RSRP relative measurement accuracy is within the specified limits for all bands.

19.6.2.2.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards.

19.6.2.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.1.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.1.2.

19.6.2.2.2.4 Test description

19.6.2.2.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.2.2.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.2.2.2.4.1-1 is replaced by Table 19.6.2.2.2.4.1-1.
- Table 6.7.2.2.2.4.1-2 is replaced by Table 19.6.2.2.2.4.1-2.

Table 19.6.2.2.2.4.1-1: Supported test configurations

Test Case ID	Description
19.6.2.2.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.2.2.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.2.2.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.2.2.2.4.1-2: Initial conditions

Parameter	Value	Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH	As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.	
Channel bandwidth	As specified by the test configuration selected from Table 19.6.2.2.2.4.1-1.	
Propagation conditions	AWGN	As specified in Annex C.2.2.

Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

19.6.2.2.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.1.1.2.4.2 with following exceptions:

- Table 6.7.2.2.2.5-1 is replaced by Table 19.6.2.2.2.5-1.

19.6.2.2.2.4.3 Message contents

Same as the message contents given in clause 6.7.2.2.1.4.3.

19.6.2.2.2.5 Test requirement

Same as the test requirements given in clause 6.7.2.2.2.5 with following exceptions:

- Table 6.7.2.2.2.5-1 is replaced by Table 19.6.2.2.1.5-1.

19.6.3 SS-SINR for ATG

19.6.3.0 Minimum conformance requirements

19.6.3.0.1 Intra-frequency SS-SINR measurement accuracy requirements

Same as in clause 4.7.3.0.1.

19.6.3.0.2 Inter-frequency SS-SINR absolute measurement accuracy requirements

Same as in clause 4.7.3.0.2.

19.6.3.0.3 Inter-frequency SS-SINR relative measurement accuracy requirements

Same as in clause 4.7.3.0.3.

19.6.3.1 NR SA FR1 SS-SINR absolute measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.3.1.1 Test purpose

The purpose of this test is to verify that the intra-frequency SS-SINR measurement accuracy is within the specified limits for all bands.

19.6.3.1.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting ss-SINR-Meas.

19.6.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.3.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.3.1.

19.6.3.1.4 Test description

19.6.3.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.3.1.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.3.1.4.1-1 is replaced by Table 19.6.3.1.4.1-1;
- Table 6.7.3.1.4.1-2 is replaced by Table 19.6.3.1.4.1-2;

Table 19.6.3.1.4.1-1: Supported test configurations

Test Case ID	Description
19.6.3.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.3.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.3.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

19.6.3.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.3.1.4.2 with following exceptions:

- Table 6.7.3.1.5-1 is replaced by Table 19.6.3.1.5-1;

19.6.3.1.4.3 Message contents

Same as the message contents given in clause 6.7.3.1.4.3.

19.6.3.1.5 Test requirement

Same as the test requirements given in clause 6.7.3.1.5 with following exceptions:

- Table 6.7.3.1.5-1 is replaced by Table 19.6.3.1.5-1;

Table 19.6.3.1.5-1: NR Cell specific test parameters (Same as Table 6.7.3.1.5-1 with following exceptions)

Parameter	Test configuration	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Propagation Condition	Config 1,2	-	AWGN+220Hz		AWGN+220Hz	
	Config 3	-	AWGN+500Hz		AWGN+500Hz	

19.6.3.2 Inter-frequency SS-SINR measurements for ATG

19.6.3.2.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.3.2.1.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-SINR absolute measurement accuracy is within the specified limits for all bands.

19.6.3.2.1.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting ss-SINR-Meas.

19.6.3.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.1.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.3.2.

19.6.3.2.1.4 Test description

19.6.3.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.3.2.1.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.3.2.1.4.1-1 is replaced by Table 19.6.3.2.1.4.1-1.
- Table 6.7.3.2.1.4.1-2 is replaced by Table 19.6.3.2.1.4.1-2.

Table 19.6.3.2.1.4.1-1: Supported test configurations

Test Case ID	Description
19.6.3.2.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.3.2.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.3.2.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.3.2.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] sclause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.3.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

19.6.3.2.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.3.1.4.2 with following exceptions:

- Table 6.7.3.1.5-1 is replaced by Table 19.6.3.2.1.5-1.
- Table 6.7.3.1.5-2 is replaced by Table 6.7.3.2.1.5-2.

19.6.3.2.1.4.3 Message contents

Same as the message contents given in clause 6.7.3.2.1.4.3.

19.6.3.2.1.5 Test requirement

Same as the test requirements given in clause 6.7.3.2.1.5 with following exceptions:

- Table 6.7.3.2.1.5-1 is replaced by Table 19.6.3.2.1.5-1.

Table 19.6.3.2.1.5-1: NR Cell specific test parameters (Same as Table 6.7.3.2.1.5-1 with following exceptions)

Parameter	Test configuration	Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Propagation Condition	Config 1,2	-	AWGN+220Hz		AWGN+220Hz		AWGN+220Hz	
	Config 3	-	AWGN+500Hz		AWGN+500Hz		AWGN+500Hz	

19.6.3.2.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.3.2.2.1 Test purpose

The purpose of this test is to verify that the inter-frequency SS-SINR relative measurement accuracy is within the specified limits for all bands.

19.6.3.2.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting ss-SINR-meas.

19.6.3.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.1.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.1.2.

19.6.3.2.2.4 Test description

19.6.3.2.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.3.2.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.3.2.2.4.1-1 is replaced by Table 19.6.3.2.2.4.1-1.
- Table 6.7.3.2.2.4.1-2 is replaced by Table 19.6.3.2.2.4.1-2.

Table 19.6.3.2.2.4.1-1: Supported test configurations

Test Case ID	Description
19.6.3.2.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.3.2.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.3.2.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.3.2.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.3.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without the LTE link		

19.6.3.2.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.3.2.2.4.2 with following exceptions:

- Table 6.7.3.2.2.5-1 is replaced by Table 19.6.2.2.1.5-1.

19.6.3.2.2.4.3 Message contents

Same as the message contents given in clause 6.7.3.2.1.4.3.

19.6.3.2.2.5 Test requirement

Same as the test requirements given in clause 6.7.3.2.2.5 with following exceptions:

- Table 6.7.3.2.2.5-1 is replaced by Table 19.6.2.2.1.5-1.

19.6.4 L1-RSRP measurement for beam reporting for ATG

19.6.4.0 Minimum conformance requirements

19.6.4.0.1 SSB based absolute L1-RSRP measurement accuracy requirements

Same as 4.7.4.0.1.

19.6.4.0.2 SSB based relative L1-RSRP measurement accuracy requirements

Same as 4.7.4.0.2.

19.6.4.0.3 CSI-RS based absolute L1-RSRP measurement accuracy requirements

Same as 4.7.4.0.3.

19.6.4.0.4 CSI-RS based relative L1-RSRP measurement accuracy requirements

Same as 4.7.4.0.4.

19.6.4.1 SSB based L1-RSRP measurements for ATG

19.6.4.1.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.4.1.1.1 Test purpose

The purpose of this test is to verify that the SSB based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

19.6.4.1.1.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards.

19.6.4.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.4.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.4.1.

19.6.4.1.1.4 Test description

19.6.4.1.1.4.1 Initial conditions

Same as the Initial conditions given in clause 6.7.4.1.1.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.

- Table 6.7.4.1.1.4.1-1 is replaced by Table 19.6.4.1.1.4.1-1;
- Table 6.7.4.1.1.4.1-2 is replaced by Table 19.6.4.1.1.4.1-2;

Table 19.6.4.1.1.4.1-1: Supported test configurations

Test Case ID	Description
19.6.4.1.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.4.1.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.4.1.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.4.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.4.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 2 and φ_1 = 5 Hz	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 2 and $\varphi_{1,1}$ = 5 Hz, $\varphi_{1,2}$ = 10 Hz, $\varphi_{1,3}$ = 15 Hz	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	- Without LTE link		

19.6.4.1.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.1.1.4.2 with the following exceptions:

- Table 6.7.4.1.1.5-1 is replaced by Table 19.6.4.1.1.5-1.

19.6.4.1.1.4.3 Message contents

Same as the message contents given in clause 6.7.4.1.1.4.3.

19.6.4.1.1.5 Test requirement

Same as the test requirements given in clause 6.7.4.1.1.5 with following exceptions:

- Table 6.7.4.1.1.5-1 is replaced by Table 19.6.4.1.1.5-1.

Table 19.6.4.1.1.5-1: NR Cell specific test parameters (Same as Table 6.7.4.1.1.5-1 with following exceptions)

Parameter	Test configuration	Unit	Test 1	Test 2
Propagation Condition	Config 1,2	-	AWGN+220 Hz	AWGN+220 Hz
	Config 3	-	AWGN+500 Hz	AWGN+500 Hz

19.6.4.1.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.4.1.2.1 Test purpose

The purpose of this test is to verify that the SSB based L1-RSRP relative measurement accuracy is within the specified limits for all bands.

19.6.4.1.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards.

19.6.4.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.4.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.4.1.

19.6.4.1.2.4 Test description

19.6.4.1.2.4.1 Initial conditions

Same as the Initial conditions given in clause 6.7.4.1.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.

  Table 6.7.4.1.2.4.1-1 is replaced by Table 19.6.4.1.2.4.1-1;
- Table 6.7.4.1.2.4.1-2 is replaced by Table 19.6.4.1.2.4.1-2;

Table 19.6.4.1.2.4.1-1: Supported test configurations

Test Case ID	Description
19.6.4.1.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.4.1.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.4.1.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.4.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.4.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.4.1.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.1.2.4.2 with following exceptions:

- Table 6.7.4.1.2.5-1 is replaced by Table 19.6.4.1.1.5-1.

19.6.4.1.2.4.3 Message contents

Same as the message contents given in clause 6.7.4.1.2.4.3.

19.6.4.1.2.5 Test requirement

Same as the test requirements given in clause 6.7.4.1.2.5 with following exceptions:

- Table 6.7.4.1.2.5-1 is replaced by Table 19.6.4.1.1.5-1.

19.6.4.2 CSI-RS based L1-RSRP measurements for ATG

19.6.4.2.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.4.2.1.1 Test purpose

The purpose of this test is to verify that the CSI-RS based L1-RSRP absolute measurement accuracy is within the specified limits for all bands.

19.6.4.2.1.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards.

19.6.4.2.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.4.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.4.2.

19.6.4.2.1.4 Test description

19.6.4.2.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.4.2.1.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.4.2.1.4.1-1 is replaced by Table 19.6.4.2.1.4.1-1;
- Table 6.7.4.2.1.4.1-2 is replaced by Table 19.6.4.2.1.4.1-2;

Table 19.6.4.2.1.4.1-1: Supported test configurations

Test Case ID	Description
19.6.4.2.1-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.4.2.1-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.4.2.1-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.4.2.1.4.1-2: Initial conditions

Parameter	Value	Comment

Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.4.2.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.4.2.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.2.1.4.2 with following exceptions:

- Table 6.7.4.2.1.5-1 is replaced by Table 19.6.4.2.1.5-1.

19.6.4.2.1.4.3 Message contents

Same as the message contents given in clause 6.7.4.2.1.4.3.

19.6.4.2.1.5 Test requirement

Same as the test requirements given in clause 6.7.4.2.1.5 with following exceptions:

- Table 6.7.4.2.1.5-1 is replaced by Table 19.6.4.2.1.5-1.

Table 19.6.4.2.1.5-1: NR Cell specific parameters (Same as Table 6.7.4.2.1.5-1 with following exceptions)

Parameter	Test configuration	Unit	Test 1	Test 2
Propagation Condition	Config 1,2	-	AWGN+220 Hz	AWGN+220 Hz
	Config 3	-	AWGN+500 Hz	AWGN+500 Hz

19.6.4.2.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.4.2.2.1 Test purpose

The purpose of this test is to verify that the CSI-RS based L1-RSRP relative measurement accuracy is within the specified limits for all bands.

19.6.4.2.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards.

19.6.4.2.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.4.0.4.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.4.2.

19.6.4.2.2.4 Test description

19.6.4.2.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.4.2.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.4.2.2.4.1-1 is replaced by Table 19.6.4.2.2.4.1-1;
- Table 6.7.4.2.2.4.1-2 is replaced by Table 19.6.4.2.2.4.1-2;

Table 19.6.4.2.2.4.1-1: Supported test configurations

Test Case ID	Description
19.6.4.2.2-1	NR: 15 kHz SSB SCS, 10MHz bandwidth, FDD
19.6.4.2.2-2	NR: 15 kHz SSB SCS, 10MHz bandwidth, TDD
19.6.4.2.2-3	NR: 30 kHz SSB SCS, 40MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table 19.6.4.2.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.4.2.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.4.2.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.4.2.2.4.2 with following exceptions:

- Table 6.7.4.2.2.5-1 is replaced by Table 19.6.4.2.1.5-1.

19.6.4.2.2.4.3 Message contents

Same as the message contents given in clause 6.7.4.2.2.4.3.

19.6.4.2.2.5 Test requirement

Same as the test procedure given in clause 6.7.4.2.2.5 with following exceptions:

- Table 6.7.4.2.2.5-1 is replaced by Table 19.6.4.2.1.5-1.19.6.5 L1-SINR measurement for beam reporting for ATG

19.6.5.0 Minimum conformance requirements

19.6.5.0.1 Minimum conformance requirements for CSI-RS based CMR and no dedicated IMR configured

Minimum requirements given in clause 6.7.9.0.1 applies.

19.6.5.0.2 Minimum conformance requirements for SSB based CMR and dedicated IMR

Minimum requirements given in clause 6.7.9.0.2 applies.

19.6.5.0.3 Minimum conformance requirements for CSI-RS based CMR and dedicated IMR

Minimum requirements given in clause 6.7.9.0.3 applies.

19.6.5.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR for ATG

19.6.5.1.1 NR SA FR1 L1-SINR absolute measurement accuracy with CSI-RS based CMR and no dedicated IMR for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.5.1.1.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

19.6.5.1.1.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting L1-SINR measurements.

19.6.5.1.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.5.1.

19.6.5.1.1.4 Test description

19.6.5.1.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.9.1.1.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.9.1.1.4.1-1 is replaced by Table 19.6.5.1.1.4.1-1;
- Table 6.7.9.1.1.4.1-2 is replaced by Table 19.6.5.1.1.4.1-2;

Table 19.6.5.1.1.4.1-1: Supported test configurations

Config	Description
19.6.5.1.1-1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
19.6.5.1.1-2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
19.6.5.1.1-3	NR 30 kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 19.6.5.1.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.5.1.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.5.1.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.9.1.1.4.2 with following exceptions:

- Table 6.7.9.1.1.5-1 is replaced by Table 19.6.5.1.1.5-1.

19.6.5.1.1.4.3 Message contents

Same as the message contents given in clause 6.7.9.1.1.4.3.

19.6.5.1.1.5 Test requirement

Same as the test requirements given in clause 6.7.9.1.1.5 with following exceptions:

- Table 6.7.9.1.1.5-1 is replaced by Table 19.6.5.1.1.5-1.

Table 19.6.5.1.1.5-1: NR Cell specific test parameters (Same as Table 6.7.9.1.1.5-1 with following exceptions)

Parameter	Config	Unit	Test 1	Test 2
Propagation condition	1, 2		AWGN+220 Hz	AWGN+220 Hz
	3		AWGN+500 Hz	AWGN+500 Hz

19.6.5.1.2 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured L1-SINR relative measurement accuracy for ATG

19.6.5.1.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR relative measurement accuracy is within the specified limits.

19.6.5.1.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting L1-SINR measurements.

19.6.5.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.5.1.

19.6.5.1.2.4 Test description

19.6.5.1.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.9.1.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.9.1.2.4.1-1 is replaced by Table 19.6.5.1.2.4.1-1;
- Table 6.7.9.1.2.4.1-2 is replaced by Table 19.6.5.1.2.4.1-2;

Table 19.6.5.1.2.4.1-1: Supported test configurations

Config	Description
19.6.5.1.2-1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
19.6.5.1.2-2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
19.6.5.1.2-3	NR 30 kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 19.6.5.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.5.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.5.1.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.9.1.2.4.2 with following exceptions:

- Table 6.7.9.1.1.5-1 is replaced by Table 19.6.5.1.1.5-1;

19.6.5.1.2.4.3 Message contents

Same as the message contents given in clause 6.7.9.1.1.4.3.

19.6.5.1.2.5 Test requirement

Same as the test requirements given in clause 6.7.9.1.2.5 with following exceptions:

- Table 6.7.9.1.1.5-1 is replaced by Table 19.6.5.1.1.5-1;

[Editor's note: duplication!]

19.6.5.1.2 NR SA FR1 L1-SINR relative measurement accuracy with CSI-RS based CMR and no dedicated IMR for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.5.1.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR relative measurement accuracy is within the specified limits.

19.6.5.1.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting L1-SINR measurements.

19.6.5.1.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.5.0.1.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.5.1.

19.6.5.1.2.4 Test description

19.6.5.1.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.9.1.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.9.1.2.4.1-1 is replaced by Table 19.6.5.1.2.4.1-1;
- Table 6.7.9.1.2.4.1-2 is replaced by Table 19.6.5.1.2.4.1-2;

Table 19.6.5.1.2.4.1-1: Supported test configurations

Config	Description
19.6.5.1.2-1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
19.6.5.1.2-2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
19.6.5.1.2-3	NR 30 kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 19.6.5.1.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.5.1.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.5.1.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.9.1.2.4.2 with following exceptions:

- Table 6.7.9.1.1.5-1 is replaced by Table 19.6.5.1.1.5-1;

19.6.5.1.2.4.3 Message contents

Same as the message contents given in clause 6.7.9.1.1.4.3.

19.6.5.1.2.5 Test requirement

Same as the test requirements given in clause 6.7.9.1.2.5 with following exceptions:

- Table 6.7.9.1.1.5-1 is replaced by Table 19.6.5.1.1.5-1;

19.6.5.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy for ATG

19.6.5.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

19.6.5.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting L1-SINR measurements.

19.6.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.5.2.

19.6.5.2.4 Test description

19.6.5.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.9.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.9.2.4.1-1 is replaced by Table 19.6.5.2.4.1-1;
- Table 6.7.9.2.4.1-2 is replaced by Table 19.6.5.2.4.1-2;

Table 19.6.5.2.4.1-1: Supported test configurations

Config	Description
19.6.5.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
19.6.5.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
19.6.5.2-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 19.6.5.2.4.1-2: Initial conditions

Parameter	Value	Comment

Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.5.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.5.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.9.2.4.2 with following exceptions:

- Table 6.7.9.2.5-1 is replaced by Table 19.6.5.2.5-1.

19.6.5.2.4.3 Message contents

Same as the message contents given in clause 6.7.9.2.4.3.

19.6.5.2.5 Test requirement

Same as the test requirements given in clause 6.7.9.2.5 with following exceptions:

- Table 6.7.9.2.5-1 is replaced by Table 19.6.5.2.5-1.

Table 19.6.5.2.5-1: NR Cell specific test parameters (Same as Table 6.7.9.2.5-1 with following exceptions)

Parameter	Config	Unit	Test 1	Test 2
Propagation condition	1, 2		AWGN+220 Hz	AWGN+220 Hz
	3		AWGN+500 Hz	AWGN+500 Hz

[Editor's note: duplication!]

19.6.5.2 NR SA FR1 L1-SINR absolute measurement accuracy with SSB based CMR and dedicated IMR for ATG

Editor’s Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.5.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

19.6.5.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting L1-SINR measurements.

19.6.5.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.5.0.2.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.5.2.

19.6.5.2.4 Test description

19.6.5.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.9.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.9.2.4.1-1 is replaced by Table 19.6.5.2.4.1-1;
- Table 6.7.9.2.4.1-2 is replaced by Table 19.6.5.2.4.1-2;

Table 19.6.5.2.4.1-1: Supported test configurations

Config	Description
19.6.5.2-1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
19.6.5.2-2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
19.6.5.2-3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 19.6.5.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.5.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.5.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.9.2.4.2 with following exceptions:

- Table 6.7.9.2.5-1 is replaced by Table 19.6.5.2.5-1.

19.6.5.2.4.3 Message contents

Same as the message contents given in clause 6.7.9.2.4.3.

19.6.5.2.5 Test requirement

Same as the test requirements given in clause 6.7.9.2.5 with following exceptions:

- Table 6.7.9.2.5-1 is replaced by Table 19.6.5.2.5-1.

Table 19.6.5.2.5-1: NR Cell specific test parameters (Same as Table 6.7.9.2.5-1 with following exceptions)

Parameter	Config	Unit	Test 1	Test 2
Propagation condition	1, 2		AWGN+220 Hz	AWGN+220 Hz
	3		AWGN+500 Hz	AWGN+500 Hz

19.6.5.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy for ATG

19.6.5.3.1 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR absolute measurement accuracy for ATG

19.6.5.3.1.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

19.6.5.3.1.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting L1-SINR measurements.

19.6.5.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.5.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.5.3.

19.6.5.3.1.4 Test description

19.6.5.3.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.9.3.1.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.9.3.1.4.1-1 is replaced by Table 19.6.5.3.1.4.1-1;
- Table 6.7.9.3.1.4.1-2 is replaced by Table 19.6.5.3.1.4.1-2;

Table 19.6.5.3.1.4.1-1: Supported test configurations

Config	Description
19.6.5.3.1-1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
19.6.5.3.1-2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
19.6.5.3.1-3	NR 30 kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 19.6.5.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.5.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.5.3.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.9.3.1.4.2 with following exceptions:

- Table 6.7.9.3.1.5-1 is replaced by Table 19.6.5.3.1.5-1.

19.6.5.3.1.4.3 Message contents

Same as the message contents given in clause 6.7.9.3.1.4.3.

19.6.5.3.1.5 Test requirement

Same as the test requirements given in clause 6.7.9.3.1.5 with following exceptions:

- Table 6.7.9.3.1.5-1 is replaced by Table 19.6.5.3.1.5-1.

Table 19.6.5.3.1.5-1: NR Cell specific test parameters (Same as Table 6.7.9.3.1.5-1 with following exceptions)

Parameter	Config	Unit	Test 1	Test 2
Propagation condition	1, 2		AWGN+220 Hz	AWGN+220 Hz
	3		AWGN+500 Hz	AWGN+500 Hz

[Editor's note: duplication!]

19.6.5.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR for ATG

19.6.5.3.1 NR SA FR1 L1-SINR absolute measurement accuracy with CSI-RS based CMR and dedicated IMR for ATG

Editor’s Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.5.3.1.1 Test purpose

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits.

19.6.5.3.1.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting L1-SINR measurements.

19.6.5.3.1.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.5.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.5.3.

19.6.5.3.1.4 Test description

19.6.5.3.1.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.9.3.1.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.

- During the test, the specific gNB reference location is emulated by test system.

- Table 6.7.9.3.1.4.1-1 is replaced by Table 19.6.5.3.1.4.1-1;
- Table 6.7.9.3.1.4.1-2 is replaced by Table 19.6.5.3.1.4.1-2;

Table 19.6.5.3.1.4.1-1: Supported test configurations

Config	Description
19.6.5.3.1-1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
19.6.5.3.1-2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
19.6.5.3.1-3	NR 30 kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 19.6.5.3.1.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.5.3.1.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.5.3.1.4.2 Test procedure

Same as the test procedure given in clause 6.7.9.3.1.4.2 with following exceptions:

- Table 6.7.9.3.1.5-1 is replaced by Table 19.6.5.3.1.5-1.

19.6.5.3.1.4.3 Message contents

Same as the message contents given in clause 6.7.9.3.1.4.3.

19.6.5.3.1.5 Test requirement

Same as the test requirements given in clause 6.7.9.3.1.5 with following exceptions:

- Table 6.7.9.3.1.5-1 is replaced by Table 19.6.5.3.1.5-1.

Table 19.6.5.3.1.5-1: NR Cell specific test parameters (Same as Table 6.7.9.3.1.5-1 with following exceptions)

Parameter	Config	Unit	Test 1	Test 2
Propagation condition	1, 2		AWGN+220 Hz	AWGN+220 Hz
	3		AWGN+500 Hz	AWGN+500 Hz

19.6.5.3.2 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR relative measurement accuracy for ATG

19.6.5.3.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR relative measurement accuracy is within the specified limits.

19.6.5.3.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting L1-SINR measurements.

19.6.5.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.5.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.5.3.

19.6.5.3.2.4 Test description

19.6.5.3.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.9.3.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.9.3.2.4.1-1 is replaced by Table 19.6.5.3.2.4.1-1;
- Table 6.7.9.3.2.4.1-2 is replaced by Table 19.6.5.3.2.4.1-2;

Table 19.6.5.3.2.4.1-1: Supported test configurations

Config	Description
19.6.5.3.2-1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
19.6.5.3.2-2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
19.6.5.3.2-3	NR 30 kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 19.6.5.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.4-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.5.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	
	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.5.3.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.9.3.2.4.2 with following exceptions:

- Table 6.7.9.3.1.5-1 is replaced by Table 19.6.5.3.1.5-1.

19.6.5.3.2.4.3 Message contents

Same as the message contents given in clause 6.7.9.3.1.4.3.

19.6.5.3.2.5 Test requirement

Same as the test requirements given in clause 6.7.9.3.2.5 with following exceptions:

- Table 6.7.9.3.1.5-1 is replaced by Table 19.6.5.3.1.5-1.[Editor's note: duplication!]

19.6.5.3.2 NR SA FR1 L1-SINR relative measurement accuracy with CSI-RS based CMR and dedicated IMR for ATG

Editor's Note: This test case is incomplete in following aspect:

- TT analysis is still missing.

19.6.5.3.2.1 Test purpose

The purpose of this test is to verify that the L1-SINR relative measurement accuracy is within the specified limits.

19.6.5.3.2.2 Test applicability

This test applies to all types of NR ATG UE from Release 18 onwards and supporting L1-SINR measurements.

19.6.5.3.2.3 Minimum conformance requirements

The minimum conformance requirements are specified in clause 19.6.5.0.3.

The normative reference for this requirement is TS 38.133 [6] clause A.19.6.5.3.

19.6.5.3.2.4 Test description

19.6.5.3.2.4.1 Initial conditions

Same as the initial conditions given in clause 6.7.9.3.2.4.1 with following exceptions:

- During the test, UE positioning and UE speed are set by AT command. UE speed is 0km/h, UE specific positioning is emulated by test system.
- During the test, the specific gNB reference location is emulated by test system.
- Table 6.7.9.3.2.4.1-1 is replaced by Table 19.6.5.3.2.4.1-1;
- Table 6.7.9.3.2.4.1-2 is replaced by Table 19.6.5.3.2.4.1-2;

Table 19.6.5.3.2.4.1-1: Supported test configurations

Config	Description
19.6.5.3.2-1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
19.6.5.3.2-2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
19.6.5.3.2-3	NR 30 kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table 19.6.5.3.2.4.1-2: Initial conditions

Parameter	Value		Comment
Test environment	NC, TL/VL, TL/VH, TH/VL, TH/VH		As specified in TS 38.508-1 [14] clause 4.1.
Test frequencies	As specified in Annex E, Table E.17-1 and TS 38.508-1 [14] clause 4.3.1.		
Channel bandwidth	As specified by the test configuration selected from Table 19.6.5.3.2.4.1-1.		
Propagation conditions	AWGN		As specified in Annex C.2.2.
Connection Diagram	TE Part 2Rx	A.3.1.8.2 with n = 1	As specified in TS 38.508-1 [14] Annex A.
	TE Part 4Rx	A.3.1.8.5 with n = 1	

	DUT Part 2Rx	A.3.2.3.4	
	DUT Part 4Rx	A.3.2.5.2	
Exceptions to connection diagram	N/A		

19.6.5.3.2.4.2 Test procedure

Same as the test procedure given in clause 6.7.9.3.2.4.2 with following exceptions:

- Table 6.7.9.3.1.5-1 is replaced by Table 19.6.5.3.1.5-1.

19.6.5.3.2.4.3 Message contents

Same as the message contents given in clause 6.7.9.3.1.4.3.

19.6.5.3.2.5 Test requirement

Same as the test requirements given in clause 6.7.9.3.2.5 with following exceptions:

- Table 6.7.9.3.1.5-1 is replaced by Table 19.6.5.3.1.5-1.

Annex A (normative): RRM test configurations

A.1 Reference measurement channels

A.1.0 General

This clause contains the Reference Measurement Channels (RMC) to be used for the RRM test scenarios in Clauses 4 to 18 of this document.

A.1.1 PDSCH

A.1.1.1 FDD

Table A.1.1.1-1: PDSCH Reference Measurement Channels for SCS = 15 kHz for FDD

Parameter	Unit	Value	
Reference channel		SR.1.1 FDD	SR.1.2 FDD
Channel bandwidth	MHz	Defined in test case	Defined in test case by the parameter $N_{RB,c}$
Number of transmitter antennas		1	1
Allocated resource blocks for PDSCH Note 1		24	Defined by test case
Allocated slots per Radio Frame		10	10
Radio frame containing SSB	slots	Note 5	Note 5
Radio frame not containing SSB	slots	10	10
MCS index		4	4
Modulation		QPSK	QPSK
Target Coding Rate		1/3	1/3
Number of control symbols		2	2
PDSCH mapping type		Type A	Type A
Information Bit Payload			
For slots with RMSI Note 2	Bits	1608	1608
For slots without RMSI	Bits	1864	1864
Number of Code Blocks per slot		1	1
Binary Channel Bits Per slot			
For slots with RMSI Note 2, 4	Bits	5184	5184
For slots without RMSI Note 6	Bits	6048	6048

NOTE 1: Allocated outside the SMTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block.
NOTE 2: PDSCH is scheduled on the slots with RMSI.
NOTE 3: If necessary, the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in 3GPP TS 38.213 [8].
NOTE 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.
NOTE 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.
NOTE 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.
NOTE 7: When DRX is configured, PDCCH can be scheduled both for downlink assignment and/or UL grant only during ([10ms] – drx-InactivityTimer) from timing when *drx-onDurationTimer* starts, unless otherwise specified in the test case.

A.1.1.2 TDD

Table A.1.1.2-1: PDSCH Reference Measurement Channels for SCS = 15 kHz for TDD

Parameter	Unit	Value	Value
Reference channel		SR.1.1 TDD	SR.1.2 TDD
Channel bandwidth	MHz	Defined in test case	Defined in test case
Number of transmitter antennas		1	1
Allocated resource blocks for PDSCH Note 1		24	24
Allocated slots per Radio Frame			
Radio frame containing SSB	slots	Note 5	Note 5
Radio frame not containing SSB	slots	4	6
MCS table		64QAM	64QAM
MCS index		4	4
Modulation		QPSK	QPSK
Target Coding Rate		1/3	1/3
Number of control symbols		2	2
PDSCH mapping type		Type A	Type A
Information Bit Payload			
For slots with RMSI Note 2	Bits	1608	1608
For slots without RMSI	Bits	1864	1864
For special slots	Bits	N/A	1128
Number of Code Blocks per slot		1	
Binary Channel Bits Per slot			
For slots with RMSI Note 2, 4	Bits	5184	5184
For slots without RMSI Note 6	Bits	6048	6048
For special slots Note 6	Bits	-	3744

NOTE 1: Allocated outside the SMTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block.
NOTE 2: PDSCH is scheduled on the slots with RMSI.
NOTE 3: If necessary, the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in 3GPP TS 38.213 [8].
NOTE 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.
NOTE 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10.
NOTE 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.
NOTE 7: When DRX is configured, PDCCH can be scheduled both for downlink assignment and/or UL grant only during ([10]ms – drx-InactivityTimer) from timing when *drx-onDurationTimer* starts, unless otherwise specified in the test case.

Table A.1.1.2-2: PDSCH Reference Measurement Channels for SCS = 30 kHz for TDD

Parameter	Unit	Value
Reference channel		SR.2.1 TDD
Channel bandwidth	MHz	Defined in test case
Number of transmitter antennas		1
Allocated resource blocks for PDSCH Note 1		24
Allocated slots per Radio Frame		
Radio frame containing SSB	slots	Note 5
Radio frame not containing SSB	slots	10
MCS table		64QAM
MCS index		4
Modulation		QPSK
Target Coding Rate		1/3
Number of control symbols		2
PDSCH mapping type		Type A
Information Bit Payload		
For slots with RMSI Note 2	Bits	1608
For slots without RMSI	Bits	1864

Number of Code Blocks per slot		1
Binary Channel Bits Per slot		
For slots with RMSI Note 2, 4	Bits	5184
For slots without RMSI Note 6	Bits	6048

NOTE 1: Allocated outside the SMTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block.
NOTE 2: PDSCH is scheduled on the slots with RMSI.
NOTE 3: If necessary, the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in 3GPP TS 38.213 [8].
NOTE 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.
NOTE 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10.
NOTE 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.
NOTE 7: When DRX is configured, PDCCH can be scheduled both for downlink assignment and/or UL grant only during ([10]ms – drxInactivityTimer) from timing when *drx-onDurationTimer* starts, unless otherwise specified in the test case.

Table A.1.1.2-3: PDSCH Reference Measurement Channels for SCS = 120 kHz for TDD

Parameter	Unit	Value		
Reference channel		SR.3.1 TDD	SR.3.2 TDD	SR.3.3 TDD
Channel bandwidth	MHz	100	100	100
Number of transmitter antennas		1	1	1
Allocated resource blocks for PDSCH		24 Note 1	24 Note 7	48 Note 7
Allocated slots per Radio Frame				
Radio frame containing SSB	slots	Note 5	Note 8	Note 5
Radio frame not containing SSB	slots	48	48	48
MCS table		64QAM	64QAM	64QAM
MCS index		4	4	4
Modulation		QPSK	QPSK	QPSK
Target Coding Rate		1/3	1/3	1/3
Number of control symbols		2	2	2
PDSCH mapping type		Type A	Type A	Type A
Information Bit Payload				
For slots with RMSI	Bits	1608	1608	3104
For slots without RMSI	Bits	1864	1864	3624
Number of Code Blocks per slot		1	1	1
Binary Channel Bits Per slot				
For slots with RMSI Note 4	Bits	5184	5184	10368
For slots without RMSI Note 6	Bits	6048	6048	12096

NOTE 1: Allocated in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block.
NOTE 2: Void
NOTE 3: If necessary, the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in 3GPP TS 38.213 [8].
NOTE 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.
NOTE 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10.
NOTE 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.
NOTE 7: Allocated in the same resource blocks as the CORESET.
NOTE 8: When DRX is configured, PDSCH is scheduled only while *drx-onDurationTimer* is running, unless otherwise specified in the test case.

A.1.2 CORESET for RMSI scheduling

A.1.2.1 FDD

Table A.1.2.1-1: RMSI CORESET Reference Measurement Channels for SCS = 15 kHz for FDD

Parameter	Unit	Value			
Reference channel		CR.1.1 FDD	CR.1.2 FDD	CR.1.3 FDD	CR.1.4 FDD
Channel bandwidth	MHz	Defined in test case	Defined in test case	Defined in test case	Defined in test case
Subcarrier spacing for RMSI CORESET	kHz	15	15	15	15
Allocated resource blocks for RMSI CORESET Note 7		24	12	15	20
Subcarrier spacing for SSB	kHz	15	15	15	15
SSB and RMSI CORESET multiplexing configuration		Pattern 1	Pattern 1	Pattern 1	Pattern 1
Offset between SSB and RMSI CORESET Note 3, 7	RB	0 (Note 8)	0 (Note8)	0 (Note8)	0 (Note8)
Configuration of PDCCH monitoring occasions for RMSI CORESET Note 4		Index 4	Index 4	Index 4	Index 4
Number of transmitter antennas		1	1	1	1
Duration of RMSI CORESET Note 7	symbols	2	2	3	3
DCI Format Note 1		Note 2	Note 2	Note 2	Note 2
Aggregation level	CCE	8	4	8	8
DMRS precoder granularity		6	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size
REG bundle size		6	6	6	6
Mapping from REG to CCE		Distributed	Distributed	Non-Distributed	Distributed
Cell ID		Note 5	Note 5	Note 5	Note 5
Payload (without CRC)	Bits	Note 6	Note 6	Note 6	Note 6

NOTE 1: DCI formats are defined in TS 38.212 [31].
NOTE 2: DCI format shall depend upon the test configuration.
NOTE 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.
NOTE 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [8].
NOTE 5: Cell ID shall depend upon the test configuration.
NOTE 6: Payload size shall depend upon the test configuration.
NOTE 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-1 in TS 38.213 [8].
NOTE 8: Other values can be used to align with GSCN as long as SSB does not overlap the RMC

A.1.2.2 TDD

Table A.1.2.2-1: RMSI CORESET Reference Measurement Channels for SCS = 15 kHz for TDD

Parameter	Unit	Value
Reference channel		CR.1.1 TDD
Channel bandwidth	MHz	Defined in test case
Subcarrier spacing for RMSI CORESET	kHz	15
Allocated resource blocks for RMSI CORESET Note 7		24
SSB and RMSI CORESET multiplexing configuration		Pattern 1
Offset between SSB and RMSI CORESET Note 3, 7	RB	0 (Note 8)
Configuration of PDCCH monitoring occasions for RMSI CORESET Note 4		Index 4
Number of transmitter antennas		1
Duration of RMSI CORESET Note 7	symbols	2
DCI Format Note 1		Note 2
Aggregation level	CCE	8
DMRS precoder granularity		6
REG bundle size		6
Mapping from REG to CCE		Distributed
Cell ID		Note 5
Payload (without CRC)	Bits	Note 6
NOTE 1: DCI formats are defined in TS 38.212 [31]. NOTE 2: DCI format shall depend upon the test configuration.		

NOTE 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.
NOTE 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [8].
NOTE 5: Cell ID shall depend upon the test configuration.
NOTE 6: Payload size shall depend upon the test configuration.
NOTE 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-1 in TS 38.213 [8].
NOTE 8: Other values can be used to align with GSCN as long as SSB does not overlap the RMC

Table A.1.2.2-2: RMSI CORESET Reference Measurement Channels for SCS = 30 kHz for TDD

Parameter	Unit	Value
Reference channel		CR.2.1 TDD
Channel bandwidth	MHz	Defined in test case
Subcarrier spacing for RMSI CORESET	kHz	30
Allocated resource blocks for RMSI CORESET Note 7		24
SSB and RMSI CORESET multiplexing configuration		Pattern 1
Offset between SSB and RMSI CORESET Note 3, 7	RB	0 (Note 8)
Configuration of PDCCH monitoring occasions for RMSI CORESET Note 4		Index 4
Number of transmitter antennas		1
Duration of RMSI CORESET Note 7	symbols	2
DCI Format Note 1		Note 2
Aggregation level	CCE	8
DMRS precoder granularity		6
REG bundle size		6
Mapping from REG to CCE		Distributed
Cell ID		Note 5
Payload (without CRC)	Bits	Note 6

NOTE 1: DCI formats are defined in TS 38.212 [31].
NOTE 2: DCI format shall depend upon the test configuration.
NOTE 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.
NOTE 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [8].
NOTE 5: Cell ID shall depend upon the test configuration.
NOTE 6: Payload size shall depend upon the test configuration.
NOTE 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-6 in TS 38.213 [8].
NOTE 8: Other values can be used to align with GSCN as long as SSB does not overlap the RMC

Table A.1.2.2-3: RMSI CORESET Reference Measurement Channels for SCS = 120 kHz for TDD

Parameter	Unit	Value	
Reference channel		CR.3.1 TDD	CR.3.2 TDD
Channel bandwidth	MHz	100	100
Subcarrier spacing for RMSI CORESET	kHz	120	120
Allocated resource blocks for RMSI CORESET		24 Note 7	48 Note 9
Subcarrier spacing for SSB	kHz	120	120
SSB and RMSI CORESET multiplexing configuration		Pattern 1 Note 7	Pattern 1 Note 9
Offset between SSB and RMSI CORESET Note 3	RB	0 (Note 8) Note 7	0 (Note 8) Note 9
Configuration of PDCCH monitoring occasions for RMSI CORESET Note 4		Index 4	Index 4
Number of transmitter antennas		1	1

Duration of RMSI CORESET	symbols	2 Note 7	2 Note 9
DCI Format Note 1		Note 2	Note 2
Aggregation level	CCE	8	8
DMRS precoder granularity		6	6
REG bundle size		6	6
Mapping from REG to CCE		Distributed	Distributed
Cell ID		Note 5	Note 5
Payload (without CRC)	Bits	Note 6	Note 6

NOTE 1: DCI formats are defined in TS 38.212 [31].
NOTE 2: DCI format shall depend upon the test configuration.
NOTE 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.
NOTE 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [8].
NOTE 5: Cell ID shall depend upon the test configuration.
NOTE 6: Payload size shall depend upon the test configuration.
NOTE 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-8 in TS 38.213 [8].
NOTE 8: Other values can be used to align with GSCN as long as SSB does not overlap the RMC
NOTE 9: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 2 in Table 13-10 in TS 38.213 [8].

A.1.3 CORESET for RMC scheduling

A.1.3.1 FDD

Table A.1.3.1-1: Control Channel RMC for SCS = 15 kHz for FDD

Parameter	Unit	Value							
Reference channel		CCR.1.1 FDD	CCR.1.2 FDD	CCR.1.3 FDD	CCR.1.4 FDD	CCR.1.5 FDD	CCR.1.6 FDD	CCR.1.7 FDD	CCR.1.8 FDD
Channel bandwidth	MHz	Defined in test case	Defined in test case	Defined in test case	Defined in test case	10	3MHz	3MHz	5MHz
Subcarrier spacing	kHz	15	15	15	15	15	15	15	15
Allocated resource blocks for CORESET Note 3		24	18	24	18	24	12	12	18
Number of transmitter antennas		1	1	1	1	1	1	1	1
Duration of CORESET	symbols	2	2	2	2	2	2	2	3
monitoringSymbolsWithinSlot		1000000 0000000	1000000 0000000	1000000 0000000	1000000 0000000	0010000 0000000	1000000 0000000	1000000 0000000	1000000 0000000
REG bundle size		6	6	6	6	6	6	6	6
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size
CCE to REG mapping		Interleaved	Interleaved	Interleaved	Interleaved	Interleaved	Interleaved	Non-Interleaved	Interleaved
Interleave n_shift		0	0	0	0	0	0	0	0
Interleave size		2	2	2	2	2	2	N/A	2
Beamforming Pre-Coder		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Aggregation level	CCE	4	2	8	4	4	4	4	8
DCI formats		Note 1	Note 1	Note 1	Note 1	Note 1	1-0	1-0	1-0
Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2

Note 1: DCI format shall depend upon the test configuration.

Note 2: Payload size shall depend upon the test configuration Note 3: Allocated in the resource blocks where the associated RMC is scheduled.

Table A.1.3.1-2: FFS

Table A.1.3.1-3: Control Channel RMC for SCS = 15 kHz for FDD

Parameter	Unit	Value				
Reference channel		CCR.3.1 FDD	CCR.3.2 FDD			
Channel bandwidth	MHz	Defined in test case	Defined in test case			
Subcarrier spacing	kHz	15	15			
Allocated resource blocks for CORESET Note 3		48	48			
Number of transmitter antennas		1	1			
Duration of CORESET	symbols	2	2			
monitoringSymbolsWithinSlot		1000000 0000000	1000000 0000000			
REG bundle size		6	6			
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size			
CCE to REG mapping		Interleaved	Interleaved			
Interleave n_shift		0	0			
Interleave size		2	2			
Beamforming Pre-Coder		N/A	N/A			
Aggregation level	CCE	8	16			
DCI formats		Note 1	Note 1			
Payload size (without CRC)	bits	Note 2	Note 2			
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration Note 3: Allocated in the resource blocks where the associated RMC is scheduled.						

A.1.3.2 TDD

Table A.1.3.2-1: Control Channel RMC for SCS = 15 kHz for TDD

Parameter	Unit	Value						
Reference channel		CCR.1.1 TDD	CCR.1.2 TDD	CCR.1.3 TDD	CCR.1.4 TDD	CCR.1.5 TDD		
Channel bandwidth	MHz	Defined in test case	Defined in test case	Defined in test case	Defined in test case	10		
Subcarrier spacing	kHz	15	15	15	15	15		
Allocated resource blocks for CORESET Note 3		24	18	24	18	18		
Number of transmitter antennas		1	1	1	1	1		
Duration of CORESET	symbols	2	2	2	2	2		
monitoringSymbolsWithinSlot		1000000 0000000	1000000 0000000	1000000 0000000	1000000 0000000	0010000 0000000		
REG bundle size		6	6	6	6	6		
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size		
CCE to REG mapping		Interleaved	Interleaved	Interleaved	Interleaved	Interleaved		
Interleave n_shift		0	0	0	0	0		
Interleave size		2	2	2	2	2		
Beamforming Pre-Coder		N/A	N/A	N/A	N/A	N/A		

Aggregation level	CCE	4	2	8	4	4		
DCI formats		Note 1	Note 1	Note 1	Note 1	Note 1		
Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2	Note 2		
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration Note 3: Allocated in the resource blocks where the associated RMC is scheduled.								

Table A.1.3.2-2: Control Channel RMC for SCS = 30 kHz for TDD

Parameter	Unit	Value			
Reference channel		CCR.2.1 TDD	CCR.2.2 TDD	CCR.2.3 TDD	CCR.2.4 TDD
Channel bandwidth	MHz	Defined in test case	Defined in test case	Defined in test case	Defined in test case
Subcarrier spacing for RMSI CORESET	kHz	30	30	30	30
Allocated resource blocks for CORESET[3]		24	24	18	18
Number of transmitter antenna		1	1	1	1
Duration of CORESET	symbols	2	2	2	2
REG bundle size		6	6	6	6
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size
CCE to REG mapping		Interleaved	Interleaved	Interleaved	Interleaved
Interleave n_shift		0	0	0	0
Interleave size		2	2	2	2
Beamforming Pre-Coder		N/A	N/A	N/A	N/A
Aggregation level	CCE	4	8	4	2
DCI formats		Note 1	Note 1	Note 1	Note 1
Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration. Note 3: Allocated in the same resource blocks where the associated RMC is scheduled.					

Table A.1.3.2-3: Control Channel RMC for SCS = 120 kHz for TDD

Parameter	Unit	Value						
Reference channel		CCR.3.1 TDD	CCR.3.2 TDD	CCR.3.3 TDD	CCR.3.4 TDD	CCR.3.5 TDD	CCR.3.6 TDD	CCR.3.7 TDD
Channel bandwidth	MHz	100	100	100	100	100	100	100
Subcarrier spacing for RMSI CORESET	kHz	120	120	120	120	120	120	120
Allocated resource blocks for CORESET[Note 3]		24	24	24	24	24	24	48
Number of transmitter antenna		1	1	1	1	1	1	1
monitoringSlotPeriodicityAndOffset[Note 4]		sl160	sl160	sl160	sl160	sl160	sl160	sl160
		0	0	80	0	0	80	0
monitoringSymbolsWithinSlot		11000000000000	00110000000000	11000000000000	10000000000000	00010000000000	10000000000000	11000000000000
Duration of CORESET	symbols	1	1	1	2	2	2	1
REG bundle size		6	6	6	6	6	6	6
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size
CCE to REG mapping		Interleaved	Interleaved	Interleaved	Interleaved	Interleaved	Interleaved	Interleaved
Interleave n_shift		0	0	0	0	0	0	0
Interleave size		2	2	2	2	2	2	2
Beamforming Pre-Coder		N/A	N/A	N/A	N/A	N/A	N/A	N/A
Aggregation level	CCE	4	4	4	8	8	8	4
DCI formats		Note 1	Note 1	Note 1	Note 1	Note 1	Note 1	Note 1

Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: DCI format shall depend upon the test configuration.
NOTE 2: Payload size shall depend upon the test configuration
NOTE 3: Allocated in the same resource blocks where the associated PDSCH RMC is scheduled.
NOTE 4: *monitoringSlotPeriodicityAndOffet* can be set to other values depending on test purpose of respective test cases, as needed, e.g. *monitoringSlotPeriodicityAndOffet* is set to "sl1 0" if it is specifically stated that cell(s) configured with one of the control channel RMCs above shall transmit PDCCHs continuously.

Table A.1.3.2-4: Control Channel RMC for SCS = 15 kHz for TDD

Parameter	Unit	Value				
Reference channel		CCR.4.1 TDD	CCR.4.2 TDD			
Channel bandwidth	MHz	Defined in test case	Defined in test case			
Subcarrier spacing	kHz	15	15			
Allocated resource blocks for CORESET Note 3		48	48			
Number of transmitter antennas		1	1			
Duration of CORESET	symbols	2	2			
monitoringSymbolsWithinSlot		10000000000000	10000000000000			
REG bundle size		6	6			
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size			
CCE to REG mapping		Interleaved	Interleaved			
Interleave n_shift		0	0			
Interleave size		2	2			
Beamforming Pre-Coder		N/A	N/A			
Aggregation level	CCE	8	16			
DCI formats		Note 1	Note 1			
Payload size (without CRC)	bits	Note 2	Note 2			

Note 1: DCI format shall depend upon the test configuration.
Note 2: Payload size shall depend upon the test configuration
Note 3: Allocated in the resource blocks where the associated RMC is scheduled.

Table A.1.3.2-5: Control Channel RMC for SCS = 30 kHz for TDD

Parameter	Unit	Value				
Reference channel		CCR.5.1 TDD	CCR.5.2 TDD			
Channel bandwidth	MHz	Defined in test case	Defined in test case			
Subcarrier spacing	kHz	30	30			
Allocated resource blocks for CORESET Note 3		48	48			
Number of transmitter antennas		1	1			
Duration of CORESET	symbols	2	2			
REG bundle size		6	6			
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size			

CCE to REG mapping		Interleaved	Interleaved			
Interleave n_shift		0	0			
Interleave size		2	2			
Beamforming Pre-Coder		N/A	N/A			
Aggregation level	CCE	8	16			
DCI formats		Note 1	Note 1			
Payload size (without CRC)	bits	Note 2	Note 2			
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration. Note 3: Allocated in the same resource blocks where the associated RMC is scheduled.						

A.1.4 CSI-RS

A.1.4.1 FDD

Table A.1.4.1-1: CSI-RS Reference Measurement Channels for SCS = 15 kHz for FDD

	CSI-RS.1.1 FDD	**CSI-RS.1.2 FDD**	**CSI-RS.1.3 FDD**	**CSI-RS.1.4 FDD**	**CSI-RS.1.5 FDD**	**CSI-RS.1.6 FDD**	**CSI-RS.1.7 FDD**
Resource Type	**periodic**	**periodic**	**aperiodic**	**aperiodic**	**aperiodic**	**periodic**	**periodic**
Resource Set Config							
nzp-CSI-ResourceSetId	0	0	0	0	0	0	0
repetition	n.a.	off	off	on	off	n.a.	off
aperiodicTriggeringOffset	n.a.	n.a.	0	0	6	n.a.	n.a.
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Resource Config							
nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	2 for resource #0
				1 for resource #1			
				2 for resource #2			
				3 for resource #3			
		1 for resource #1	1 for resource #1	4 for resource #4	1 for resource #1		3 for resource #1
				5 for resource #5			
				6 for resource #6			
				7 for resource #7			
powerControlOffset	0	0	0	0	0	0	0
powerControlOffsetSS	db0	db0	db0	db0	db0	db0	db0
scramblingID	0	0	0	0	0	0	0
Period (slots)	slot5	slot10	n.a.	n.a.	n.a.	slot40	slot10
Offset	1	1	n.a.	n.a.	n.a.	1	1
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0	n.a.	n.a.	n.a.	TCI.State.0	TCI.State.0
		TCI.State.1					TCI.State.1

frequencyDomainAllocation	000001	0001	0001	0001	000001	000001	0100
nrofPorts	2	1	1	1	1	2	1
firstOFDMSymbolInTimeDomain	4 for resource #0	6 for resource #0	6 for resource #0	0 for resource #0	Specified in the test case for resource #0	5 for resource #0	6 for resource #0
				1 for resource #1			
				2 for resource #2			
				3 for resource #3			
		10 for resource #1	10 for resource #1	4 for resource #4	n.a.		10 for resource #1
				5 for resource #5			
				6 for resource #6			
				7 for resource #7			
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	noCDM	FD-CDM2	noCDM
density	1	3	3	3	3	1	3
startingRB	0	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.							

Table A.1.4.1-1A: CSI-RS Reference Measurement Channels for SCS=15 kHz for FDD

	CSI-RS.1.1A FDD	**CSI-RS.1.2A FDD**	**CSI-RS.1.3A FDD**
Resource Type	**periodic**	**aperiodic**	**periodic**
Resource Set Config			
nzp-CSI-ResourceSetId	1	1	1
repetition	off	off	off
aperiodicTriggeringOffset	n.a.	0	n.a.
trs-Info	n.a.	n.a.	n.a.
Resource Config			
nzp-CSI-RS-ResourceId	12 for resource #0	22 for resource #0	14 for resource #0
	13 for resource #1	23 for resource #1	15 for resource #1
powerControlOffset	0	0	0
powerControlOffsetSS	db0	db0	db0
scramblingID	0	0	0
Period (slots)	slot20	n.a.	slot10
Offset	1	n.a.	2
qcl-InfoPeriodicCSI-RS	n.a.	n.a.	n.a.
frequencyDomainAllocation	0001	0001	0001
nrofPorts	1	1	1

firstOFDMSymbolInTimeDomain	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
cdm-Type	noCDM	noCDM	noCDM
density	3	3	3
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.			

A.1.4.2 TDD

Table A.1.4.2-1: CSI-RS Reference Measurement Channels for SCS = 15 kHz for TDD

	CSI-RS.1.1 TDD	**CSI-RS.1.2 TDD**	**CSI-RS.1.3 TDD**	**CSI-RS.1.4 TDD**	**CSI-RS.1.5 TDD**	**CSI-RS.1.6 TDD**
Resource Type	periodic	periodic	aperiodic	aperiodic	periodic	periodic
Resource Set Config						
nzp-CSI-ResourceSetId	0	0	0	0	0	0
repetition	n.a.	off	off	on	n.a.	off
aperiodicTriggeringOffset	n.a.	n.a.	0	0	n.a.	n.a.
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Resource Config						
nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	2 for resource #0
				1 for resource #1		
				2 for resource #2		
				3 for resource #3		
		1 for resource #1	1 for resource #1	4 for resource #4		3 for resource #1
				5 for resource #5		
				6 for resource #6		
				7 for resource #7		
powerControlOffset	0	0	0	0	0	0
powerControlOffsetSS	db0	db0	db0	db0	db0	db0
scramblingID	0	0	0	0	0	0
Period (slots)	slot5	slot10	n.a.	n.a.	slot40	slot10
Offset	1	1	n.a.	n.a.	1	1
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0	n.a.	n.a.	TCI.State.0	TCI.State.0
		TCI.State.1				TCI.State.1
frequencyDomainAllocation	000001	0001	0001	0001	000001	0100
nrofPorts	2	1	1	1	2	1
firstOFDMSymbolInTimeDomain	4 for resource #0	6 for resource #0	6 for resource #0	0 for resource #0	5 for resource #0	6 for resource #0
				1 for resource #1		
				2 for resource #2		
				3 for resource #3		
		10 for resource #1	10 for resource #1	4 for resource #4		10 for resource #1

				5 for resource #5 6 for resource #6 7 for resource #7		
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	FD-CDM2	noCDM
density	1	3	3	3	1	3
startingRB	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.						

Table A.1.4.2-1A: CSI-RS Reference Measurement Channels for SCS=15 kHz for TDD

	CSI-RS.1.1A TDD	**CSI-RS.1.2A TDD**	**CSI-RS.1.3A TDD**
Resource Type	**periodic**	**aperiodic**	**periodic**
Resource Set Config			
nzp-CSI-ResourceSetId	1	1	1
repetition	off	off	off
aperiodicTriggeringOffset	n.a.	0	n.a.
trs-Info	n.a.	n.a.	n.a.
Resource Config			
nzp-CSI-RS-ResourceId	12 for resource #0	22 for resource #0	14 for resource #0
	13 for resource #1	23 for resource #1	15 for resource #1
powerControlOffset	0	0	0
powerControlOffsetSS	db0	db0	db0
scramblingID	0	0	0
Period (slots)	slot20	n.a.	slot10
Offset	1	n.a.	2
qcl-InfoPeriodicCSI-RS	n.a.	n.a.	n.a.
frequencyDomainAllocation	0001	0001	0001
nrofPorts	1	1	1
firstOFDMSymbolInTimeDomain	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
cdm-Type	noCDM	noCDM	noCDM
density	3	3	3
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.			

Table A.1.4.2-2: CSI-RS Reference Measurement Channels for SCS = 30 kHz for TDD

	CSI-RS.2.1 TDD	**CSI-RS.2.2 TDD**	**CSI-RS.2.3 TDD**	**CSI-RS.2.4 TDD**	**CSI-RS.2.5 TDD**	**CSI-RS.2.6 TDD**	**CSI-RS.2.7 TDD**
Resource Type	**periodic**	**periodic**	**aperiodic**	**aperiodic**	**aperiodic**	**periodic**	**periodic**
Resource Set Config							
nzp-CSI-ResourceSetId	0	0	0	0	0	0	0

repetition	n.a.	off	off	on	off	n.a.	off
aperiodicTriggeringOffset	n.a.	n.a.	0	0	6	n.a.	n.a.
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Resource Config							
nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	2 for resource #0
				1 for resource #1			
				2 for resource #2			
				3 for resource #3			
		1 for resource #1	1 for resource #1	4 for resource #4	1 for resource #1		3 for resource #1
				5 for resource #5			
				6 for resource #6			
				7 for resource #7			
powerControlOffset	0	0	0	0	0	0	0
powerControlOffsetSS	db0	db0	db0	db0	db0	db0	db0
scramblingID	0	0	0	0	0	0	0
Period (slots)	slot10	slot20	n.a.	n.a.	n.a.	slot80	slot20
Offset	2	2	n.a.	n.a.	n.a.	2	2
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0	n.a.	n.a.	n.a.	TCI.State.0	TCI.State.0
		TCI.State.1					TCI.State.1
frequencyDomainAllocation	000001	0001	0001	0001	000001	000001	0100
nrofPorts	2	1	1	1	1	2	1
firstOFDMSymbolInTimeDomain	5 for resource #0	6 for resource #0	6 for resource #0	0 for resource #0	Specified in the test case for resource #0	5 for resource #0	6 for resource #0
				1 for resource #1			
				2 for resource #2			
				3 for resource #3			
		10 for resource #1	10 for resource #1	4 for resource #4	n.a.		10 for resource #1
				5 for resource #5			
				6 for resource #6			
				7 for resource #7			
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	noCDM	FD-CDM2	noCDM
density	1	3	3	3	3	1	3
startingRB	0	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.							

Table A.1.4.2-2A: CSI-RS Reference Measurement Channels for SCS=30 kHz for TDD

	CSI-RS.2.1A TDD	CSI-RS.2.2A TDD	CSI-RS.2.3A TDD
Resource Type	**periodic**	**aperiodic**	**periodic**
Resource Set Config			
nzp-CSI-ResourceSetId	1	1	1
repetition	off	off	off
aperiodicTriggeringOffset	n.a.	0	n.a.
trs-Info	n.a.	n.a.	n.a.
Resource Config			

nzp-CSI-RS-ResourceId	12 for resource #0	22 for resource #0	14 for resource #0
	13 for resource #1	23 for resource #1	15 for resource #1
powerControlOffset	0	0	0
powerControlOffsetSS	db0	db0	db0
scramblingID	0	0	0
Period (slots)	slot40	n.a.	slot20
Offset	2	n.a.	4
qcl-InfoPeriodicCSI-RS	n.a.	n.a.	n.a.
frequencyDomainAllocation	0001	0001	0001
nrofPorts	1	1	1
firstOFDMSymbolInTimeDomain	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
cdm-Type	noCDM	noCDM	noCDM
density	3	3	3
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.			

Table A.1.4.2-3: CSI-RS Reference Measurement Channels for SCS = 120 kHz for TDD

	CSI-RS.3.1 TDD	**CSI-RS.3.2 TDD**	**CSI-RS.3.3 TDD**	**CSI-RS.3.4 TDD**	**CSI-RS.3.5 TDD**	**CSI-RS.3.6 TDD**
Resource Type	periodic	periodic	aperiodic	aperiodic	periodic	periodic
Resource Set Config						
nzp-CSI-ResourceSetId	0	0	0	0	0	0
repetition	n.a.	off	off	on	n.a.	off
aperiodicTriggeringOffset	n.a.	n.a.	4	4	n.a.	n.a.
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Resource Config						
nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	2 for resource #0
				1 for resource #1		
				2 for resource #2		
				3 for resource #3		
		1 for resource #1	1 for resource #1	4 for resource #4		3 for resource #1
				5 for resource #5		
				6 for resource #6		
				7 for resource #7		
powerControlOffset	0	0	0	0	0	0
powerControlOffsetSS	db0	db0	db0	db0	db0	db0
scramblingID	0	0	0	0	0	0
Period (slots)	slot40	slot80	n.a.	n.a.	slot320	slot80

Offset	8	16	n.a.	n.a.	8	16
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0	n.a.	n.a.	TCI.State.0	TCI.State.0
		TCI.State.1				TCI.State.1
frequencyDomainAllocation	000001	0001	0001	0001	000001	0100
nrofPorts	2	1	1	1	1	1
firstOFDMSymbolInTimeDomain	5 for resource #0	6 for resource #0	6 for resource #0	0 for resource #0	5 for resource #0	6 for resource #0
				1 for resource #1		
				2 for resource #2		
				3 for resource #3		
		10 for resource #1	10 for resource #1	4 for resource #4		10 for resource #1
				5 for resource #5		
				6 for resource #6		
				7 for resource #7		
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	FD-CDM2	noCDM
density	1	3	3	3	1	3
startingRB	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.						

Table A.1.4.2-3A: CSI-RS Reference Measurement Channels for SCS=120 kHz for TDD

	CSI-RS.3.1A TDD	CSI-RS.3.2A TDD	CSI-RS.3.3A TDD
Resource Type	**periodic**	**aperiodic**	**periodic**
Resource Set Config			
nzp-CSI-ResourceSetId	1	1	1
repetition	off	off	off
aperiodicTriggeringOffset	n.a.	6	n.a.
trs-Info	n.a.	n.a.	n.a.
Resource Config			
nzp-CSI-RS-ResourceId	12 for resource #0	22 for resource #0	14 for resource #0
	13 for resource #1	23 for resource #1	15 for resource #1
powerControlOffset	0	0	0
powerControlOffsetSS	db0	db0	db0
scramblingID	0	0	0
Period (slots)	slot160	n.a.	slot80
Offset	8	n.a.	16
qcl-InfoPeriodicCSI-RS	n.a.	n.a.	n.a.
frequencyDomainAllocation	0001	0001	0001
nrofPorts	1	1	1
firstOFDMSymbolInTimeDomain	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
cdm-Type	noCDM	noCDM	noCDM

density	3	3	3
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.			

A.1.4A CSI-RS for tracking

A.1.4A.1 FR1

A.1.4A.1.1 FDD

Table A.1.4A.1.1-1: CSI-RS for tracking FDD

Parameter	Unit	Value	
Reference channel		TRS.1.1 FDD	TRS.1.2 FDD
Bandwidth		BW of Active BWP[1]	BW of Active BWP[1]
SCS	kHz	15	30
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4	k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4	l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4	'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4	3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	20 for CSI-RS resource 1,2,3,4	40 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4	20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0	0
TCI state		TCI.State.0	TCI.State.0
NOTE 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases			

Table A.1.4A.1.1-2: Aperiodic CSI-RS for tracking

Parameter	Unit	Value	
Reference channel		TRS.1.3 FDD	TRS.1.4 FDD
Bandwidth		BW of Active BWP[Note 1]	BW of Active BWP[Note 1]
SCS	kHz	15	30
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4	k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4	l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4	'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4	3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0[Note 2]	0[Note 2]
TCI state		TCI.State.0	TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases			

A.1.4A.1.2 TDD

Table A.1.4A.1.2-1: CSI-RS for TDD

Parameter	Unit	Value

Reference channel		TRS.1.1 TDD	TRS.1.2 TDD
Bandwidth		BW of Active BWP[1]	BW of Active BWP[1]
SCS	kHz	15	30
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4	k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4	l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4	'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4	3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	20 for CSI-RS resource 1,2,3,4	40 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4	20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0	0
TCI state		TCI.State.0	TCI.State.0
NOTE 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases			

Table A.1.4A.1.2-2: Aperiodic CSI-RS for tracking

Parameter	**Unit**	**Value**	
Reference channel		TRS.1.3 TDD	TRS.1.4 TDD
Bandwidth		BW of Active BWP[Note 1]	BW of Active BWP[Note 1]
SCS	kHz	15	30
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4	k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4	l_0 = 5 for CSI-RS resource 1 and 3 l_0 = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4	'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4	3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0[Note 2]	0[Note 2]
TCI state		TCI.State.0	TCI.State.0
Note: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases			

A.1.4A.2 FR2

A.1.4A.2.1 TDD

Table A.1.4A.2.1-1: CSI-RS for tracking for TDD FR2

Parameter	**Unit**	**Value**			
Reference channel		TRS.2.1 TDD	TRS.2.2 TDD	TRS.2.4 TDD	TRS.2.5 TDD
Bandwidth		BW of Active BWP[Note 1, 2]	BW of Active BWP[Note 1,2]	BW of Active BWP[Note 1,2]	BW of Active BWP[Note 1,2]
SCS	kHz	120	120	120	120
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4	k_0=0 for CSI-RS resource 1,2,3,4	k_0=0 for CSI-RS resource 1,2,3,4	k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 1 for CSI-RS resource 1 and 3 l_0 = 5 for CSI-RS resource 2 and 4	l_0 = 2 for CSI-RS resource 1 and 3 l_0 = 6 for CSI-RS resource 2 and 4	l_0 = 3 for CSI-RS resource 1 and 3 l_0 = 7 for CSI-RS resource 2 and 4	l_0 = 4 for CSI-RS resource 1 and 3 l_0 = 8 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 1,2,3,4	1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4	'No CDM' for CSI-RS resource 1,2,3,4	'No CDM' for CSI-RS resource 1,2,3,4	'No CDM' for CSI-RS resource 1,2,3,4

Density (ρ)		3 for CSI-RS resource 1,2,3,4	3 for CSI-RS resource 1,2,3,4	3 for CSI-RS resource 1,2,3,4	3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	80 for CSI-RS resource 1,2,3,4	80 for CSI-RS resource 1,2,3,4	80 for CSI-RS resource 1,2,3,4	80 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4	40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4	40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4	40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0	0	0	0
TCI state		TCI.State.0 Note 3	TCI.State.1 Note 3	TCI.State.2	TCI.State.3
NOTE 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases NOTE 2: If active BWP is larger than 52RBs, BW of TRS is configured as 52RBs. Otherwise, same as active BWP size. NOTE 3: If unified TCI states are configured, the TCI state ID is defined in each test case and from A.10A.2 Unified TCI state Configuration					

Table A.1.4A.2.1-2: Aperiodic CSI-RS for tracking for SCS=120kHz Set 1

Parameter	Unit	Value
Reference channel		TRS.2.3 TDD
Bandwidth		BW of Active BWP Note 1,3
SCS	kHz	120
First subcarrier index in the PRB used for CSI-RS		k_0=0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l_0 = 1 for CSI-RS resource 1 and 3 l_0 = 5 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 Note 2
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases Note 2: Unless otherwise specified in the test case Note 3: If active BWP is larger than 52RBs, BW of TRS is configured as 52RBs. Otherwise, same as active BWP size.		

A.1.4B CSI-IM configurations

A.1.4B.1 FDD

Table A.1.4B.1-1: CSI-IM Reference Measurement Channels for SCS=15kHz

	CSI-IM.1.1 FDD	CSI-IM.1.2 FDD	CSI-IM.1.3 FDD
Resource Type	**periodic**	**aperiodic**	**periodic**
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			
csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0

	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot20	n.a.	slot10
Offset	1	n.a.	2
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.			

A.1.4B.2 TDD

Table A.1.4B.2-1: CSI-IM Reference Measurement Channels for SCS=15kHz

	CSI-IM.1.1 TDD	**CSI-IM.1.2 TDD**	**CSI-IM.1.3 TDD**
Resource Type	**periodic**	**aperiodic**	**periodic**
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			
csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot20	n.a.	slot10
Offset	1	n.a.	2
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.			

Table A.1.4B.2-2: CSI-IM Reference Measurement Channels for SCS=30kHz

	CSI-IM.2.1 TDD	**CSI-IM.2.2 TDD**	**CSI-IM.2.3 TDD**
Resource Type	**periodic**	**aperiodic**	**periodic**
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			
csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot40	n.a.	slot40
Offset	2	n.a.	4
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)

Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.

Table A.1.4B.2-3: CSI-RS Reference Measurement Channels for SCS=120kHz

	CSI-IM.3.1 TDD	CSI-IM.3.2 TDD	CSI-IM.3.3 TDD
Resource Type	**periodic**	**aperiodic**	**periodic**
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			
csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot160	n.a.	slot80
Offset	8	n.a.	16
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.			

A.1.5 TDD UL/DL configuration

Table A.1.5-1: TDD UL/DL configuration for SCS=15kHz

Parameter	Unit	Value		
Reference channel		TDDConf.1.1	TDDConf.1.2	
referenceSubcarrierSpacing	kHz	15	15	
TDD UL/DL pattern 1 Note 2		'DSUU' S='10DL:2GP:2UL'	'DSUU' S=' 6DL: 2GP: 6UL'	
dl-UL-TransmissionPeriodicity	ms	4	4	
nrofDownlinkSlots		1	1	
nrofDownlinkSymbols		10	6	
nrofUplinkSlot		2	2	
nrofUplinkSymbols		2	6	
TDD UL/DL pattern 2 Note 2		'D'	'D'	
dl-UL-TransmissionPeriodicity	ms	1	1	
nrofDownlinkSlots		1	1	
nrofDownlinkSymbols		0	0	
nrofUplinkSlot		0	0	
nrofUplinkSymbols		0	0	
NOTE 1: As specified in TS 38.213 [8] and TS 38.331 [13]. NOTE 2: For information				

Table A.1.5-2: TDD UL/DL configuration for SCS=30kHz

Parameter	Unit	Value		
Reference channel		TDDConf.2.1	TDDConf.2.2	TDDConf.2.3
referenceSubcarrierSpacing	kHz	30	30	30
TDD UL/DL pattern 1 Note 2		'3D1S4U' S='6DL:4GP:4UL'	'1D1S2U' S='11DL: 1GP:2UL'	'3D1S4U' S='4DL:4GP:6UL'

dl-UL-TransmissionPeriodicity	ms	4	2	4
nrofDownlinkSlots		3	1	3
nrofDownlinkSymbols		6	11	4
nrofUplinkSlot		4	2	4
nrofUplinkSymbols		4	2	6
TDD UL/DL pattern 2 Note 2		'DD'	Not configured	'DD'
dl-UL-TransmissionPeriodicity	ms	1		1
nrofDownlinkSlots		2		2
nrofDownlinkSymbols		0		0
nrofUplinkSlot		0		0
nrofUplinkSymbols		0		0
NOTE 1: As specified in TS 38.213 [8] and TS 38.331 [13]. NOTE 2: For information				

Table A.1.5-3: TDD UL/DL configuration for SCS=120kHz

Parameter	Unit	Value		
Reference channel		TDDConf.3.1	TDDConf.3.2	
referenceSubcarrierSpacing	kHz	120	120	
TDD UL/DL pattern 1 Note 2		'DDDSU' S='10DL:2GP:2UL'	'DDDSU' S=' 6DL: 2GP: 6UL'	
dl-UL-TransmissionPeriodicity	ms	0.625	0.625	
nrofDownlinkSlots		3	3	
nrofDownlinkSymbols		10	6	
nrofUplinkSlot		1	1	
nrofUplinkSymbols		2	6	
TDD UL/DL pattern 2 Note 2		Not configured	Not configured	
dl-UL-TransmissionPeriodicity	ms	Not configured	Not configured	
nrofDownlinkSlots		Not configured	Not configured	
nrofDownlinkSymbols		Not configured	Not configured	
nrofUplinkSlot		Not configured	Not configured	
nrofUplinkSymbols		Not configured	Not configured	
NOTE 1: As specified in TS 38.213 [8] and TS 38.331 [13]. NOTE 2: For information				

A.1.6 PUSCH

This rule applies to NR cell(s), which the UE is connected to. The UE is in RRC_CONNECTED mode.

When signalling or data payloads are expected to be sent on the PUSCH, the UE may be provided in advance with PUSCH resources by the SS. For sake of simplicity, the PUSCH scheduling may also occur continuously over many consecutive subframes. These options shall not be used if:
1) stated otherwise in the test description, or
2) the transmission of PUSCH and UL scheduling information affects the test purpose (e.g. DRX, PUCCH reception etc.)

A.1A Reference measurement channels under CCA

A.1A.0 General

This clause contains the Reference Measurement Channels (RMC) under CCA to be used for the RRM test scenarios in Clauses 10 to 12 of this document.

A.1A.1 PDSCH

A.1A.1.1 FDD

Table A.1A.1.1-1: PDSCH Reference Measurement Channels under CCA for SCS=30kHz

Parameter	Unit	Value						
Reference channel		SR.1.1 CCA						
Channel bandwidth	MHz	40						
Number of transmitter antennas		1						
Allocated resource blocks for PDSCH Note 1		24						
Allocated slots per Radio Frame								
Radio frame containing SSB	slots	Note 5						
Radio frame not containing SSB	slots	Note 7						
MCS table		64QAM						
MCS index		4						
Modulation		QPSK						
Target Coding Rate		1/3						
Number of control symbols		2						
PDSCH mapping type		Type A						
Information Bit Payload								
For slots with RMSI Note 2	bits	1608						
For slots without RMSI	bits	1864						
Number of Code Blocks per slot		1						
Binary Channel Bits Per slot								
For slots with RMSI Note 2, Note 4	bits	5184						
For slots without RMSI Note 6	bits	6048						

Note 1: Allocated outside the discovery burst transmission window in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block.
Note 2: PDSCH is scheduled on the slots with RMSI.
Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [8].
Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.
Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3A.
Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditonalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.
Note 7: PDSCH is transmitted during the RMC burst as specified in A.1A.5.

A.1A.2 CORESET for RMSI scheduling

A.1A.2.1 TDD

Table A.1A.2.1-1: RMSI CORESET Reference Channel under CCA for SCS=30KHz

Parameter	Unit	Value						
Reference channel		CR.1.1 CCA						
Channel bandwidth	MHz	40						
Subcarrier spacing	kHz	30						

Allocated resource blocks for RMSI CORESET Note 7		48						
SSB and RMSI CORESET multiplexing configuration Note 7		Pattern 1						
Offset between SSB and RMSI CORESET Note 3, 7	RB	0 (Note 8)						
Configuration of PDCCH monitoring occasions for RMSI CORESET Note 4		Index 0						
Number of transmitter antennas		1						
Duration of RMSI CORESET Note 7	symbols	2						
DCI Format Note 1		Note 2						
Aggregation level	CCE	8						
DMRS precoder granularity		6						
REG bundle size		6						
Mapping from REG to CCE		Distributed						
Cell ID		Note 5						
Payload (without CRC)	bits	Note 6						

Note 1: DCI formats are defined in TS 38.212 [31].
Note 2: DCI format shall depend upon the test configuration.
Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.
Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [8].
Note 5: Cell ID shall depend upon the test configuration.
Note 6: Payload size shall depend upon the test configuration.
Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 4 in Table 13-4A in TS 38.213 [8].
Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.

A.1A.3 CORESET for RMC scheduling

A.1A.3.1 TDD

Table A.1A.3.1-1: Control Channel RMC under CCA with SCS=30KHz

Parameter	Unit	Value						
Reference channel		CCR.1.1 CCA	CCR.1.2 CCA	CCR.1.3 CCA				
Channel bandwidth	MHz	40	40	40				
Subcarrier spacing	kHz	30	30	30				
Allocated resource blocks for CORESET Note 3		24	24	18				
Number of transmitter antennas		1	1	1				
Duration of CORESET	symbols	2	2	2				
REG bundle size		6	6	6				
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size				
CCE to REG mapping		Interleaved	Interleaved	Interleaved				
Interleave n_shift		0	0	0				
Interleave size		2	2	2				
Beamforming Pre-Coder		N/A	N/A	N/A				
Aggregation level	CCE	4	8	4				
DCI formats		Note 1	Note 1	Note 1				

Payload size (without CRC)	bits	Note 2	Note 2	Note 2				
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration. Note 3: Allocated in the same resource blocks where the associated RMC is scheduled.								

A.1A.4 TDD UL/DL configuration

A.1A.4.1 TDD

Table A.3.1A.4-1: TDD UL/DL configuration under CCA for SCS=30kHz

Parameter	Unit	Value		
Reference channel		TDDConf.1.1 CCA		
referenceSubcarrierSpacing	kHz	N/A		
TDD UL/DL pattern 1 Note 2, Note 3		'3D1S4U' S='6DL:4GP:4UL'		
dl-UL-TransmissionPeriodicity	ms	N/A		
nrofDownlinkSlots		N/A		
nrofDownlinkSymbols		N/A		
nrofUplinkSlot		N/A		
nrofUplinkSymbols		N/A		
TDD UL/DL pattern 2 Note 2, Note 3		'DD'		
dl-UL-TransmissionPeriodicity	ms	N/A		
nrofDownlinkSlots		N/A		
nrofDownlinkSymbols		N/A		
nrofUplinkSlot		N/A		
nrofUplinkSymbols		N/A		
Note 1: As specified in TS 38.213 [8] and TS 38.331 [13]. Note 2: Do not configure *tdd-UL-DL-ConfigurationCommon* using RRC configuration Note 3: The UE will be scheduled via DCI according to the TDD pattern defined in the table.				

A.1A.5 RMC burst transmission model

RMC not conveying RMSI is scheduled during the RMC burst. The length of the transmission burst in slots is defined as N. The burst transmission format is determined according to the steps below:

1. Select N randomly from a given set of the number of slots $S_1 = \{1,3,5\}$ with equal probability as the total length of RMC burst transmission format.

2. A uniform random variable from 0 to 1 is generated. If the random variable is less than P_{CCA_DL}, a burst of N fully occupied slots is transmitted. Otherwise, the RMC burst transmission is muted and the muting duration is the same as the number N of slots for determined burst format.

RMC burst transmission is scheduled outside discovery burst transmission window. If transmission occurred in the previous slot, transmission is muted for a duration of one slot. Additionally, if the start time of the candidate RMC burst transmission is within 5 slots of the start of the discovery burst transmission window, RMC transmission is not performed.

A.2 Reference OCNG configuration

A.2.1 Generic OFDMA channel noise generator (OCNG)

The OCNGpattern is used in a test for modelling the allocation of unused resourced in the channel bandwidth to virtual UEs (UEs that are not under test). The OCNG pattern simulates both PDCCH and PDSCH transmissions to the virtual UEs. For the cells operating under CCA, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during the slots for which CCA attempt is unsuccessful or during DBT windows.

Table A.2.1-1: OP.1: Generic OCNG pattern for all unused REs

OCNG Parameters	Control Region	Data Region
Resource allocation	Unused REs (Note 1)	Unused REs (Note 2)
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
NOTE 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. NOTE 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell, confined to $BW_{occupied}$ where specified in the test case.		

Table A.2.1-2: OP.2: Generic OCNG pattern for all unused REs for 2AoA setup

OCNG Parameters	Control Region	Data Region
Probe	Transmitting the serving beam	
Resource allocation	Unused REs (Note 1) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.	Unused REs (Note 2) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
NOTE 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. NOTE 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell, confined to $BW_{occupied}$ where specified in the test case. NOTE 3: No OCNG is transmitted from the probe transmitting non-serving beam.		

Table A.2.1-3: OP.3: Generic OCNG pattern for unused REs in the same BW as CORESET

OCNG Parameters	Control Region	Data Region
Resource allocation	Unused REs (Note 1)	Unused REs (Note 2)
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
NOTE 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell. NOTE 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the allocated bandwidth of the CORESET of the serving cell. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell.		

Table A.2.1-4: OP.4: Generic OCNG pattern for all unused REs outside SSB slot(s)

OCNG Parameters	Control Region	Data Region
Resource allocation	Unused REs (Note 1)	Unused REs (Note 2)
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
NOTE 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. REs for OCNG shall not be allocated in the slot(s) containing SSB of the respective cell. NOTE 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell. REs for OCNG shall not be allocated in the slot(s) containing SSB of the respective cell.		

Table A.2.1-5: OP.5: Generic OCNG pattern for unused REs in the same BW as CORESET for 2AoA setup

OCNG Parameters	Control Region	Data Region
Probe	Transmitting the serving beam	
Resource allocation	Unused REs (Note 1) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.	Unused REs (Note 2) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
NOTE 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell. NOTE 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the allocated bandwidth of the CORESET of the serving cell. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell. NOTE 3: No OCNG is transmitted from the probe transmitting non-serving beam.		

A.3 Reference SSB configuration

A.3.1 SSB configuration for FR1

Table A.3.1-1: SSB allocation for FR1

SSB Parameters	Unit	Value								
SSB Pattern		SSB.1 FR1	SSB.2 FR1	SSB.3 FR1	SSB.4 FR1	SSB.5 FR1	SSB.6 FR1	SSB.7 FR1	SSB.8 FR1	SSB.13 FR1
Channel bandwidth	MHz	10	40	10	40	10	40	10	40	3
SSB SCS	kHz	15	30	15	30	15	30	15	30	15

SSB periodicity (T_{SSB})	ms	20													
Number of SSBs per SS-burst		1	1	2		2		1	1	2		2		1	
SS/PBCH block index		0	0	0	1	0	1	0	0	2	3	2	3	0	
Indices of symbols containing SSB		2-5	4-7 or 2-5 Note 2	2-5	8-11	4-7 or 2-5 Note 2	8-11	2-5	4-7 or 2-5 Note 2	2-5	8-11	4-7 or 2-5 Note 2	8-11	2-5	
Indices of slots containing SSB		0													
Indices of SFN containing SSB		SFN mod (max(T_{SSB},10ms)/10ms) = 0						SFN mod (max(T_{SSB},10ms)/10ms) = 1		SFN mod (max(T_{SSB},10ms)/10ms) = 0					
RB numbers containing SSB within channel BW		(RB_J, RB_{J+1},…., RB_{J+19})Note 1												(RB_J, RB_{J+1},…., RB_{J+11})Note 1	

NOTE 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [28].
NOTE 2: Symbols 4-7 are chosen if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [28]; Otherwise, symbols 2-5 are chosen.

A.3.2 SSB configuration for FR2

Table A.3.2-1: SSB allocation for FR2

SSB Parameters	**Unit**	**Value**															
SSB Pattern		SSB.1 FR2		SSB.2 FR2		SSB.3 FR2	SSB.4 FR2	SSB.5 FR2		SSB.6 FR2		SSB.7 FR2	SSB.8 FR2	SSB.9 FR2		SSB.10 FR2	
Channel bandwidth	MHz	100															
SSB SCS	kHz	120		240		120	240	120		240		120	240	120		240	
SSB periodicity (T_{SSB})	ms	20															
Number of SSBs per SS-burst		2		2		1	1	2		2		1	1	2		2	
SS/PBCH block index		0	1	0	1	0	0	2	3	2	3	1	1	2	3	2	3
Indices of symbols containing SSB		4-7	8-11	8-11	12-13, 0-1	4-7	8-11	2-5	6-9	2-5	6-9	8-11	12-13, 0-1	2-5	6-9	4-7	8-11
Indices of slots containing SSB		0		0	0-1	0	0	1	1	1	1	0	0-1	1	1	1	1
Indices of SFN containing SSB		SFN mod (max(T_{SSB},10ms)/10ms) = 0															
RB numbers containing SSB within channel BW		(RB_J, RB_{J+1},…., RB_{J+19})Note 1															

NOTE 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [28].

A.3A Reference SSB configuration under CCA

A.3A.1 SSB configuration under CCA for FR1

A.3A.1.1 SSB pattern 1 under CCA for semi-static channel access: SSB allocation for SSB SCS=30kHz in 40MHz

Table A.3A.1.1-1: SSB.1 CCA: SSB Pattern 1 for SSB under CCA for SCS=30 kHz in 40 MHz channel

SSB Parameters	Values
Channel bandwidth	40 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})	1
Number of SS/PBCH block candidates per SSB index	1
SS/PBCH block candidate position	0
SS/PBCH block index	0
Symbol numbers containing SSB Note 2	2-5
Slot numbers containing SSB Note 2	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [28].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [8]). They are not settable parameters themselves	

A.3A.1.2 SSB pattern 2 under CCA for dynamic channel access: SSB allocation for SSB SCS=30kHz in 40MHz

Table A.3A.1.2-1: SSB.2 CCA: SSB Pattern 2 for SSB under CCA for SCS=30 kHz in 40 MHz channel

SSB Parameters	Values	
Channel bandwidth	40 MHz	
SSB SCS	30 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})	1	
Number of SS/PBCH block candidates per SSB index	2	
SS/PBCH block candidate position	0	2
SS/PBCH block index	0	0
Symbol numbers containing SSB Note 2	2-5	2-5
Slot numbers containing SSB Note 2	0	1
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0	
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19})Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [28].		
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [8]). They are not settable parameters themselves		

A.3A.1.3 SSB pattern 3 under CCA for semi-static channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3A.1.3-1: SSB.3 CCA: SSB Pattern 3 for SSB under CCA for SCS=30 kHz in 40 MHz channel

SSB Parameters	Values
Channel bandwidth	40 MHz
SSB SCS	30 kHz

SSB periodicity (T_{SSB})	20 ms	
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})	2	
Number of SS/PBCH block candidates per SSB index	1	
SS/PBCH block candidate position	0	1
SS/PBCH block index	0	1
Symbol numbers containing SSB Note 2	2-5	8-11
Slot numbers containing SSB Note 2	0	0
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0	
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [28]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [8]). They are not settable parameters themselves.		

A.3A.1.4 SSB pattern 4 under CCA for dynamic channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3A.1.4-1: SSB.4 CCA: SSB Pattern 4 for SSB under CCA for SCS=30 kHz in 40 MHz channel

SSB Parameters	Values			
Channel bandwidth	40 MHz			
SSB SCS	30 kHz			
SSB periodicity (T_{SSB})	20 ms			
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})	2			
Number of SS/PBCH block candidates per SSB index	2			
SS/PBCH block candidate position	0	2	1	3
SS/PBCH block index	0	0	1	1
Symbol numbers containing SSB Note 2	2-5	2-5	8-11	8-11
Slot numbers containing SSB Note 2	0	1	0	1
SFN containing SSB	SFN mod (max(T_{SSB},10ms)/10ms) = 0			
RB numbers containing SSB within channel BW	(RB_J, RB_{J+1},…., RB_{J+19}) Note 1			
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [28]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [8]). They are not settable parameters themselves.				

A.3B Reference SSB configuration for RedCap

A.3B.1 SSB configuration for FR1

Table A.3B.1-1: SSB allocation for FR1

SSB Parameters		Unit	Value						
SSB Pattern			SSB.1 RedCap FR1	SSB.2 RedCap FR1	SSB.3 RedCap FR1	SSB.4 RedCap FR1	SSB.5 RedCap FR1	SSB.6 RedCap FR1	SSB.7 RedCap FR1
Channel bandwidth		MHz	20	20	20	10	20	10	20
SSB SCS		kHz	30	30	30	15	30	15	30
SSB periodicity (T_{SSB})		ms	20	20	20	20	20	80	80
Number of SSBs per SS-burst			1	2	1	1	1	1	1
Symbol numbers containing SSB Note 4	SSB #0		4-7 or 2-5 Note 3	4-7 or 2-5 Note 3	4-7 or 2-5 Note 3	2-5	4-7 or 2-5 Note 3	2-5	4-7 or 2-5 Note 3
	SSB #1		N/A	8-11	N/A	N/A	N/A	N/A	N/A

Slot numbers containing SSB Note 4		0						
SFN containing SSB		SFN mod (T_{SSB} /10ms) = 0	SFN mod (T_{SSB} /10ms) = 0	SFN mod (T_{SSB} /10ms) = 1	SFN mod (T_{SSB} /10ms) = 0	SFN mod (T_{SSB} /10ms) = 0	SFN mod (T_{SSB} /10ms) = 0	SFN mod (T_{SSB} /10ms) = 0
RB numbers containing SSB within channel BW		(RB_J, RB_{J+1},…., RB_{J+19})Note 1					(RB_J, RB_{J+1},…., RB_{J+19})Note 2	

NOTE 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [28].
NOTE 2: RBs containing SSB can be configured in any frequency location within the associated bandwidth part except the RBs for allowed synchronization raster defined in TS 38.104 [28].
NOTE 3: Symbols 4-7 are chosen if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [28]; Otherwise, symbols 2-5 are chosen.
NOTE 4: These values have been derived from other parameters for information purposes (as per TS 38.213). They are not settable parameters themselves

A.3B.2 SSB configuration for FR2

Table A.3B.2-1: SSB allocation for FR2

SSB Parameters		Unit	Value				
SSB Pattern			SSB.1 RedCap FR2	SSB.2 RedCap FR2	SSB.3 RedCap FR2	SSB.4 RedCap FR2	SSB.5 RedCap FR2
Channel bandwidth		MHz	100	100	100	100	100
SSB SCS		kHz	120	120	120	240	240
SSB periodicity (T_{SSB})		ms	20	40	80	40	80
Number of SSBs per SS-burst			1	1	1	1	1
Symbol numbers containing SSB Note 3	SSB #0		4-7	4-7	4-7	8-11	8-11
	SSB #1		N/A	N/A	N/A	N/A	N/A
Indices of slots containing SSB Note 3			0				
Indices of SFN containing SSB			SFN mod (T_{SSB} /10ms) = 0	SFN mod (T_{SSB} /10ms) = 0	SFN mod (T_{SSB} /10ms) = 0	SFN mod (T_{SSB} /10ms) = 0	SFN mod (T_{SSB} /10ms) = 0
RB numbers containing SSB within channel BW			(RB_J,RB_{J+1},….,RB_{J+19})Note 1		(RB_J,RB_{J+1},…., RB_{J+19})Note 2	(RB_J,RB_{J+1},…., RB_{J+19})Note 1	(RB_J,RB_{J+1},…., RB_{J+19})Note 2

NOTE 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [28].
NOTE 2: RBs containing SSB can be configured in any frequency location within the associated bandwidth part except the RBs for allowed synchronization raster defined in TS 38.104 [28].
NOTE 3: These values have been derived from other parameters for information purposes (as per TS 38.213). They are not settable parameters themselves

A.4 Reference SMTC configuration

Table A.4-1: SMTC configurations

SMTC Parameters	Unit	Value								
SMTC Pattern		SMTC.1	SMTC.2	SMTC.3	SMTC.4	SMTC.5	SMTC.6	SMTC.7	SMTC.8	SMTC.9
SMTC periodicity	ms	20	20	160	20	20	20	20	10	20
SMTC offset	ms	0	0	0	10	10	17	5	0	13

SMTC duration	ms	1	5	1	1	5	5	5	1	1

A.4A Reference SMTC configuration for RedCap

Table A.4A-1: SMTC configurations

SMTC Parameters	Unit	Value					
SMTC Pattern		SMTC.1 RedCap	SMTC.2 RedCap	SMTC.3 RedCap	SMTC.4 RedCap		
SMTC periodicity	ms	40	80	40	80		
SMTC offset	ms	0	0	20	0		
SMTC duration	ms	1	1	1	5		

A.5 Reference DRX configurations

The reference DRX configurations for the NR serving cell are captured in Table A.5-1. The reference DRX configurations for the E-UTRA serving cell for EN-DC and inter-RAT test cases are captured in Table A.5-2.

Table A.5-1: DRX configurations for NR serving cell

Parameter	Unit	Value								
DRX Configuration		DRX.1	DRX.2	DRX.3	DRX.6	DRX.7	DRX.8	DRX.11	DRX.X1	DRX.14
drx-onDurationTimer	ms	1	1	6	1	6	6	6	6	6
drx-InactivityTimer	ms	1	1	1	1	1	1	1	1	1
drx-RetransmissionTimerDL	slot	1	1	1	1	1	1	1	1	1
drx-RetransmissionTimerUL	slot	1	1	1	1	1	1	1	1	1
drx-LongCycleStartOffset	ms	40	640	40	320	640	320	20	80	160
shortDRX	-	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled	disabled
TimeAlignmentTimer	ms	500	500	Infinity	500	Infinity	Infinity	Infinity	Infinity	Infinity
NOTE 1: The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [13].										

Table A.5-2: DRX configurations for E-UTRA serving cell

Parameter	Unit	Value				
DRX Configuration		DRX.4	DRX.5	DRX.9	DRX.10	DRX.12
drx-onDurationTimer	ms	psf2	psf6	psf2	psf6	psf6
drx-InactivityTimer	ms	psf2	psf1920	psf100	psf1920	psf2
drx-RetransmissionTimerDL	slot	psf16	psf16	psf16	psf16	psf16
drx-LongCycleStartOffset	ms	sf160, 0	sf320. 0	sf40, 0	sf640. 0	sf640, 0
shortDRX	-	disabled	disabled	disabled	disabled	disabled
TimeAlignmentTimer	ms	Infinity	Infinity	500	500	Infinity
NOTE 1: The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 36.331 [29]						

A.6 EN-DC test setup

The purpose of this Annex is to specify the EN-DC configuration for the test cases in Chapters 4 and 5 of this test specification.

A.6.1 E-UTRA serving cell parameters

This clause defines the cell power levels and other specific cell parameters of the E-UTRA serving cell for EN-DC.

A.6.1.1 E-UTRA serving cell parameters for EN-DC tests with NR FR1

Table A.6.1.1-1 defines the E-UTRA serving cell parameters for EN-DC tests with NR FR1 cell(s), defined in Chapter 4 of this test specification and for iRAT tests with E-UTRA serving cell and NR FR1 cell(s) defined in Chapter 8 of this test specification. Unless otherwise stated within the test, all measurements in Clauses 4 and 5 are performed only on the NR carrier. The E-UTRA PCell shall configured to not interfere with NR operation and the E-UTRA PCell signal power shall not be critical to the test purpose.

Table A.6.1.1-1: E-UTRAN cell specific test parameters for EN-DC tests with NR FR1

Parameter	Unit	E-UTRAN Cell1
E-UTRA RF Channel Number		1
Duplex mode		FDD or TDD
TDD special subframe configuration Note1		6
TDD uplink-downlink configuration Note1		1
$BW_{channel}$ Note 6		5MHz: $N_{RB,c}$ = 25 10MHz: $N_{RB,c}$ = 50 20MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel Note2, Note 6		5MHz: R.7 FDD 10MHz: R.3 FDD 20MHz: R.6 FDD 5MHz: R.4 TDD 10MHz: R.0 TDD 20MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel Note2, Note 6		5MHz: R.11 FDD 10MHz: R.6 FDD 20MHz: R.10 FDD 5MHz: R.11 TDD 10MHz: R.6 TDD 20MHz: R.10 TDD
OCNG Patterns Note 2		5MHz: OP.20 FDD 10MHz: OP.10 FDD 20MHz: OP.17 FDD 5MHz: OP.9 TDD 10MHz: OP.1 TDD 20MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA Note 3	dB	
OCNG_RB Note 3	dB	
N_{oc} Note 4	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	17
$\hat{E}_s/I_{ot}$	dB	17
RSRP Note 5	dBm/15 kHz	-87
SCH_RP Note 5	dBm/15 kHz	-87
Io Note 5	dBm/Ch BW	-59.13 + 10log($N_{RB,c}$ /50)
Propagation Condition		AWGN
Antenna Configuration		1x2

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
NOTE 2: DL RMCs and OCNG patterns are specified in clauses A.1, A.2 and D.1 of TS 36.521-3 [26].
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
NOTE 5: Es/Iot, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
NOTE 6: For E-UTRA anchor configuration, pick 5 MHz as default channel bandwidth setting in the tests as it is supported by all E-UTRA bands. If none of the UE supported EN-DC band combos support 5MHz E-UTRA carrier, pick 20 MHz channel BW or 10 MHz channel BW, in that order,

Table A.6.1.1-2: *CQI-ReportConfig-DEFAULT:* Additional E-UTRA Anchor Configuration

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-2 CQI-ReportConfig-DEFAULT			
Information Element	**Value/remark**	**Comment**	**Condition**
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportModeAperiodic	NOT PRESENT		
cqi-ReportPeriodic	NOT PRESENT		
}			

Table A.6.1.1-3:*PhysicalConfigDedicated-DEFAULT:* Additional E-UTRA Anchor Configuration

Derivation Path: TS 36.508 [7] clause 4.8.2, Table 4.8.2.1.6-1 PhysicalConfigDedicated-DEFAULT			
Information Element	**Value/remark**	**Comment**	**Condition**
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {			
soundingRS-UL-ConfigDedicated	Not present		RBC
}			

Table A.6.1.1-4:*MAC-MainConfig-RBC*: Additional E-UTRA Anchor Configuration

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table 4.8.2.1.5-1 MAC-MainConfig-RBC			
Information Element	**Value/remark**	**Comment**	**Condition**
timeAlignmentTimerDedicated	Infinity		

A.6.1.2 E-UTRA serving cell parameters for EN-DC tests with NR FR2

Table A.6.1.2-1 defines the E-UTRA serving cell parameters for EN-DC tests with NR FR2 cell(s), defined in Chapter 5 of this test specification and for iRAT tests with E-UTRA serving cell and NR FR1 cell(s) defined in Chapter 8 of this test specification. Unless otherwise stated within the test, all measurements in Clauses 5 and 7 are performed only on the NR carrier. The E-UTRA PCell shall configured to not interfere with NR operation and the E-UTRA PCell signal power shall not be critical to the test purpose.

Table A.6.1.2-1: E-UTRAN cell specific test parameters for EN-DC tests with NR FR2

Parameter	Unit	E-UTRAN Cell1
E-UTRA RF Channel Number		1
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$ [Note 5]	MHz	5MHz: $N_{RB,c}$ = 25 10MHz: $N_{RB,c}$ = 50 20MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel[Note2, Note 5]		5MHz: R.7 FDD 10MHz: R.3 FDD 20MHz: R.6 FDD 5MHz: R.4 TDD 10MHz: R.0 TDD 20MHz: R.3 TDD

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2, Note 5]		5MHz: R.11 FDD 10MHz: R.6 FDD 20MHz: R.10 FDD 5MHz: R.11 TDD 10MHz: R.6 TDD 20MHz: R.10 TDD
OCNG Patterns[Note2, Note 5]		5MHz: OP.20 FDD 10MHz: OP.10 FDD 20MHz: OP.17 FDD 5MHz: OP.9 TDD 10MHz: OP.1 TDD 20MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA[Note3]	dB	
OCNG_RB[Note3]	dB	

NOTE 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [24].
NOTE 2: DL RMCs and OCNG patterns are specified in clauses A 1, A.2 and D.1 of TS 36.521-3 [26].
NOTE 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
NOTE 4: The E-UTRA signal is required only to ensure the E-UTRA link to the DUT in the EN-DC operation. The Test System shall provide a stable and noise-free E-UTRA signal without need of precise propagation modelling, path loss and polarization control. Further details of the E-UTRA signal configuration are not defined as part of the cell specific test parameters, since the E-UTRA link is not under performance verification and is not expected to influence the NR FR2 requirement.
NOTE 5: The For E-UTRA anchor configuration, pick 5 MHz as default channel bandwidth setting in the tests as it is supported by all E-UTRA bands. If none of the UE supported EN-DC band combos support 5MHz E-UTRA carrier, pick 20 MHz channel BW or 10 MHz channel BW, in that order,

Table A.6.1.2-2: *CQI-ReportConfig-DEFAULT:* Additional E-UTRA Anchor Configuration

Derivation Path: TS 36.508 [7] clause 4.6.3, Table 4.6.3-2 CQI-ReportConfig-DEFAULT			
Information Element	**Value/remark**	**Comment**	**Condition**
CQI-ReportConfig-DEFAULT ::= SEQUENCE {			
cqi-ReportModeAperiodic	NOT PRESENT		
cqi-ReportPeriodic	NOT PRESENT		
}			

Table A.6.1.2-3:*PhysicalConfigDedicated-DEFAULT:* Additional E-UTRA Anchor Configuration

Derivation Path: TS 36.508 [7] clause 4.8.2, Table 4.8.2.1.6-1 PhysicalConfigDedicated-DEFAULT			
Information Element	**Value/remark**	**Comment**	**Condition**
PhysicalConfigDedicated-DEFAULT ::= SEQUENCE {			
soundingRS-UL-ConfigDedicated	Not present		RBC
}			

Table A.6.1.2-4:*MAC-MainConfig-RBC*: Additional E-UTRA Anchor Configuration

Derivation Path: TS 36.508 [7] clause 4.8.2.1.5, Table 4.8.2.1.5-1 MAC-MainConfig-RBC			
Information Element	**Value/remark**	**Comment**	**Condition**
timeAlignmentTimerDedicated	Infinity		

A.6A NR FR1-FR2 test setup

Some test cases in clause 7 have NR cells in both FR1 and FR2. Unless otherwise stated within the test, the NR FR1 Cell signal is required only to provide a link to the UE under test. The Test Equipment shall provide a stable and noise-free NR FR1 signal without need of precise propagation modelling, path loss and polarization control. Further details of the NR FR1 signal configuration are not defined as part of the cell specific test parameters, since the NR FR1 link is not under performance verification and is not expected to influence the test purpose.

A.6B EN-DC test setup with unlicensed bands

A.6B.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) under CCA in FR1

Table A.6B.1-1 defines cell specific test parameters for E-UTRAN cell which can be used in EN-DC test cases or in any test case comprising at least one E-UTRA serving cell with all NR cells under CCA in FR1. Unless otherwise stated within the test, all measurements are performed only on the unlicensed NR carrier. The E-UTRA serving cell shall configured to not interfere with NR operation and the E-UTRA serving cell signal power shall not be critical to the test purpose.

Table A.6B.1-1: E-UTRAN cell specific test parameters for tests with all NR cells user CCA in FR1

Parameter	Unit	E-UTRAN Cell
Duplex mode		FDD or TDD
TDD special subframe configuration[Note1]		6
TDD uplink-downlink configuration[Note1]		1
$BW_{channel}$		5 MHz: $N_{RB,c}$ = 25 10 MHz: $N_{RB,c}$ = 50 20 MHz: $N_{RB,c}$ = 100
PDSCH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel[Note2]		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns[Note2]		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	0
PDCCH_RA	dB	

PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA Note3	dB	
OCNG_RB Note3	dB	
N_{oc} Note4	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	17
$\hat{E}_s/I_{ot}$	dB	17
RSRP Note5	dBm/15 kHz	-87
SCH_RP Note5	dBm/15 kHz	-87
Io Note5	dBm/Ch BW	-59.13+10log($N_{RB,c}$ /50)
Propagation Condition		AWGN
Antenna Configuration		1x2

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3: OCNG shall be used such that all cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5: E_s/I_{ot}, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.7 Reference PRACH configurations

This clause provides the typical PRACH configurations used for all RRM test cases defined in this test specification. Parameters not listed in this clause can be derived from the configuration of each test.

A.7.1 PRACH configurations for FR1

Table A.7.1-1 defines the PRACH configurations for FR1. Each of the PRACH configurations defined in Table A.7.1-1 have different applicabilities:

- PRACH.1 FR1 for SSB-based contention based random access in FR1.
- PRACH.2 FR1 for SSB-based non-contention based random access in FR1.
- PRACH.3 FR1 for CSI-RS based non-contention based random access in FR1.
- PRACH.4 FR1 for CSI-RS based non-contention based random access in FR1 to convey BFR.
- PRACH.6 FR1 for SSB-based contention free random access in FR1.

The PRACH configuration defined in Table A.7.1-2 has the following applicability:

- PRACH.5 FR1 for LTM early UL synchronization on candidate cell in FR1.

Table A.7.1-1 Parameters for PRACH Configurations for FR1

Field	Value					Comment
PRACH Configuration	PRACH.1 FR1	PRACH.2 FR1	PRACH.3 FR1	PRACH.4 FR1	PRACH.6 FR1	
prach-ConfigurationIndex	102	102	102	102	102	10ms PRACH periodicity and other detailed configuration defined in table 6.3.3.2-2 in TS 38.211 [7].
msg1-SubcarrierSpacing	Same as UL carrier SCS	Same as UL carrier SCS	Same as UL carrier SCS	Same as UL carrier SCS	Same as UL carrier SCS	

totalNumberOfRA-Preambles	48	48	48	48	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	48	48	48	48	No group B.
prach-RootSequenceIndex	0	0	0	0	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	-	-	-	oneFourth, n16	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
ssb-perRACH-Occasion	-	oneFourth	oneFourth	oneFourth	-	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One	One	One	One	One PRACH transmission occasions FDMed in one time instance.
rsrp-ThresholdSSB	RSRP_51	RSRP_51	N/A	RSRP_51	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
rsrp-ThresholdCSI-RS	N/A	N/A	RSRP_51	N/A	N/A	
ra-ContentionResolutionTimer	sf48	-	-	-	sf48	48 sub-frames
powerRampingStep	dB2	dB2	dB2	dB2	dB2	
preambleReceivedTargetPower	dBm-120	dBm-120	dBm-120	dBm-120	dBm-120	
preambleTransMax	n6	n6	n6	n200	n6	Max number of RA preamble transmission performed before declaring a failure is 6
ra-ResponseWindow	sl10	sl10	sl10	sl1	sl10	10 slots
zeroCorrelationZoneConfig	11	11	11	11	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	2	2	2	2	20ms, as defined in table 7.2-1 in TS 38.321 [12].
ssb-ResourceList	-	present	N/A	N/A	-	Associated with SSB index 0
ra-PreambleIndex	-	40	N/A	N/A	-	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	-	present	N/A	N/A	-	Associated with SSB index 0
ra-PreambleIndex	-	40	N/A	N/A	-	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
csirs-ResourceList	N/A	N/A	present	presnt	N/A	Associated with CSI-RS configured
ra-PreambleIndex	N/A	N/A	40	40	N/A	Associated with CSI-RS configured
ra-OccasionList	-	-	1	1	-	RA occasions allowed corresponding to CSI-RS
ra-ssb-OccasionMaskIndex	-	1	N/A	N/A	-	PRACH occasion index 1 is allowed
NOTE: For further information see Clause 6.3.2 in TS 38.331 [13].						

Table A.7.1-2 Parameters for LTM early UL synchronization PRACH Configuration for FR1

Field	Value	Comment
PRACH Configuration	PRACH.5 FR1	
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
msg1-FrequencyStart	0	
zeroCorrelationZoneConfig	11	N-CS configuration, NCS = 23
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	
powerRampingStep	dB2	

ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ltm-prach-SubcarrierSpacing	Same as UL carrier SCS	
Note: For further information see clause 6.3.2 in TS 38.331 [13].		

A.7.1A PRACH configurations for FR1 under CCA

A.7.1A.1 FR1 PRACH configuration 1 under CCA

Table A.7.1A.1-1 provides PRACH configuration 1 for SSB-based contention based random access in FR1 under CCA.

Table A.7.1A.1-1: Parameters for FR1 PRACH configuration 1 under CCA

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [7].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
ra-ContentionResolutionTimer	sf48	48 sub-frames
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 PRACH configuration 1 for random access test with UL CCA failures.
preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
ra-ResponseWindow	Sl20	20 slots
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [12].
Note: For further information see clause 6.3.2 in TS 38.331 [13].		

A.7.1A.2 FR1 PRACH configuration 2 under CCA

Table A.7.1A.2-1 provides PRACH configuration 2 for SSB-based contention based random access in FR1 under CCA.

Table A.7.1A.2-1: Parameters for FR1 PRACH configuration 2 under CCA

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [7].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.

ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 PRACH configuration 2 for random access test with UL CCA failures.
preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
ra-ResponseWindow	sl20	20 slots
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [12].
ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
Note: For further information see clause 6.3.2 in TS 38.331 [13].		

A.7.2 PRACH configurations for FR2

Table A.7.2-1 defines the PRACH configurations for FR2. Each of the PRACH configurations defined in Table A.7.2-1 have different applicabilities:

- PRACH.1 FR2 for SSB-based contention based random access in FR2.
- PRACH.2 FR2 for SSB-based non-contention based random access in FR2.
- PRACH.3 FR2 for CSI-RS based non-contention based random access in FR2.
- PRACH.4 FR2 for CSI-RS based non-contention based random access in FR2 to convey BFR.
- PRACH.6 FR2 for SSB-based contention free random access in FR2.

The PRACH configuration defined in Table A.7.2-2 has the following applicability:

- PRACH.5 FR2 for LTM early UL synchronization on candidate cell in FR2.

Table A.7.2-1 Parameters for PRACH Configurations for FR2

Field	Value					Comment
PRACH Configuration	PRACH.1 FR2	PRACH.2 FR2	PRACH.3 FR2	PRACH.4 FR2	PRACH.6 FR2	
prach-ConfigurationIndex	190	190	190	190	190	Preamble format C2, 10ms PRACH periodicity and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [7].
msg1-SubcarrierSpacing	Same as UL carrier SCS	Same as UL carrier SCS	Same as UL carrier SCS	Same as UL carrier SCS	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	48	48	48	48	Total number of preambles used for contention based and contention free random access

numberOfRA-PreamblesGroupA	48	48	48	48	48	No group B.
prach-RootSequenceIndex	0	0	0	0	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	N/A	N/A	N/A	oneFourth, n16	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
ssb-perRACH-Occasion	N/A	oneFourth	oneFourth	oneFourth	N/A	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One	One	One	One	One PRACH transmission occasions FDMed in one time instance.
rsrp-ThresholdSSB	RSRP_51	RSRP_51	N/A	RSRP_51	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [13].
rsrp-ThresholdCSI-RS	N/A	N/A	RSRP_51	N/A	N/A	
ra-ContentionResolutionTimer	sf48	N/A	N/A	N/A	sf48	48 sub-frames
powerRampingStep	dB2	dB2	dB2	dB2	dB2	
preambleReceivedTargetPower	dBm-120	dBm-120	dBm-120	dBm-120	dBm-120	
preambleTransMax	n6	n6	n6	n200	n6	Max number of RA preamble transmission performed before declaring a failure
ra-ResponseWindow	sl10	sl10	sl10	sl40	sl10	
zeroCorrelationZoneConfig	11	11	11	11	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	2	2	2	2	20ms, as defined in table 7.2-1 in TS 38.321 [12].
ssb-ResourceList	-	present	N/A	N/A	-	Associated with SSB index 0
ra-PreambleIndex	-	40	N/A	N/A	-	Associated with SSB index 0
csirs-ResourceList	N/A	present	present	present	N/A	Associated with CSI-RS configured
ra-PreambleIndex	N/A	40	40	40	N/A	Associated with CSI-RS configured
ra-OccasionList	-	-	1	1	-	RA occasions allowed corresponding to CSI-RS
ra-ssb-OccasionMaskIndex	-	1	N/A	N/A	-	PRACH occasion index 1 is allowed
NOTE: For further information see Clause 6.3.2 in TS 38.331 [13].						

Table A.7.2-2 Parameters for LTM early UL synchronization PRACH Configuration for FR2

Field	Value	Comment
PRACH Configuration	PRACH.5 FR2	
prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6]
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
msg1-FrequencyStart	0	
zeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	
powerRampingStep	dB2	
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ltm-prach-SubcarrierSpacing	Same as UL carrier SCS	
Note: For further information see clause 6.3.2 in TS 38.331 [13].		

A.7A Reference MsgA configurations

This clause provides the typical PRACH and PUSCH configurations for MsgA used for all RRM test cases defined in this test specification. Parameters not listed in this clause can be derived from the configuration of each test.

A.7A.1 MsgA configurations for FR1

Table A.7A.1-1 defines the MsgA configurations for FR1. Each of the MsgA configurations defined in Table A.7A.1-1 have different applicabilities:

- MsgA.1 FR1 for SSB-based 2-step contention based random access in FR1.
- MsgA.2 FR1 for SSB-based 2-step non-contention based random access in FR1.

Table A.7A.1-1 Parameters for MsgA Configurations for FR1

Field	Value		Comment
MsgA Configuration	MsgA.1 FR1	MsgA.2 FR1	
msgA-prach-ConfigurationIndex	102	102	10ms PRACH periodicity and other detailed configuration defined in table 6.3.3.2-2 in TS 38.211 [7].
msgA-SubcarrierSpacing	Same as UL carrier SCS	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	48	No group B.
msgA-PRACH-RootSequenceIndex	0	0	Logic sequence index = 0, resulting in root sequence = 1.
msgA-SSB-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msgA-RO-FDM	One	One	One PRACH transmission occasions FDMed in one time instance.
ra-ContentionResolutionTimer	sf48	-	48 sub-frames
msgA-PreamblePowerRampingStep	dB2	dB2	
msgA-PreambleReceivedTargetPower	dBm-120	dBm-120	
preambleTransMax	n6	n6	Max number of RA preamble transmission performed before declaring a failure is 6
msgB-ResponseWindow	sl10	sl10	10 slots
msgA-ZeroCorrelationZoneConfig	11	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	-	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	-	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	-	1	PRACH occasion index 1 is allowed
msgA-MCS	1	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	0	
PUSCH allocation length	14	14	
mappingTypeMsgA-PUSCH	typeA	typeA	
nrofPRBs-PerMsgA-PO	2	2	Number of RBs per PUSCH occasion

nrofMsgA-PO-FDM	One	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	1	Configure 1 port per CDM group
msgA-DeltaPreamble	2dB	2dB	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Disabled	Whether to apply delta MCS
NOTE: For further information see clause 6.3.2 in TS 38.331 [13].			

A.7A.1A MsgA configurations for FR1 under CCA

A.7A.1A.1 FR1 MsgA configuration 1 under CCA

Table A.7A.1A.1-1 provides MsgA configuration 1 for SSB-based contention based random access for 2-step RA in FR1 under CCA.

Table A.7A.1A.1-1: Parameters for FR1 MsgA configuration 1 under CCA

Field	Value	Comment
msgA-prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [7].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
msgA-SSB-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
ra-ContentionResolutionTimer	sf48	48 sub-frames
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 MsgA configuration 1 for random access test with UL CCA failures.
preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
msgB-ResponseWindow	sl20	20 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [12].
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	14	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group

msgA-DeltaPreamble	3	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [13].		

A.7A.1A.2 FR1 MsgA configuration 2 under CCA

Table A.7A.1A.2-1 provides MsgA configuration 2 for SSB-based contention based random access for 2-step RA in FR1 under CCA.

Table A.7A.1A.2-1: Parameters for FR1 MsgA configuration 2 under CCA

Field	Value	Comment
msgA-prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [7].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 MsgA configuration 2 for random access test with UL CCA failures.
preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
msgB-ResponseWindow	sl20	20 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [12].
ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	14	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion

nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group
msgA-DeltaPreamble	3	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [13].		

A.7A.2 MsgA configurations for FR2

Table A.7A.2-1 defines the MsgA configurations for FR2. Each of the MsgA configurations defined in Table A.7A.2-1 have different applicabilities:

- MsgA.1 FR2 for SSB-based contention based random access in FR2.
- MsgA.2 FR2 for SSB-based non-contention based random access in FR2.

Table A.7A.2-1 Parameters for MsgA Configurations for FR2

Field	Value		Comment
MsgA Configuration	MsgA.1 FR2	MsgA.2 FR2	
msgA-prach-ConfigurationIndex	190	190	Preamble Format C2, 10ms PRACH periodicity and other detailed configuration defined in table 6.3.3.2-2 in TS 38.211 [7].
msgA-SubcarrierSpacing	Same as UL carrier SCS	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	48	No group B.
msgA-PRACH-RootSequenceIndex	0	0	Logic sequence index = 0, resulting in root sequence = 1.
msgA-SSB-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msgA-RO-FDM	One	One	One PRACH transmission occasions FDMed in one time instance.
ra-ContentionResolutionTimer	sf48	-	48 sub-frames
msgA-PreamblePowerRampingStep	dB2	dB2	
msgA-PreambleReceivedTargetPower	dBm-120	dBm-120	
preambleTransMax	n6	n6	Max number of RA preamble transmission performed before declaring a failure is 6
msgB-ResponseWindow	sl10	sl10	10 slots
msgA-ZeroCorrelationZoneConfig	11	11	N-CS configuration, N_{CS} = 23
Backoff Parameter Index	2	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	-	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	-	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	-	1	PRACH occasion index 1 is allowed
msgA-MCS	1	1	MCS index for MsgA PUSCH

nrofSlotsMsgA-PUSCH	1	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	0	
PUSCH allocation length	10	10	
mappingTypeMsgA-PUSCH	typeA	typeA	
nrofPRBs-PerMsgA-PO	2	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	1	Configure 1 port per CDM group
msgA-DeltaPreamble	2	2	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Disabled	Whether to apply delta MCS
NOTE: For further information see clause 6.3.2 in TS 38.331 [13].			

A.8 Reference BWP configurations

This clause provides the typical BWP configurations used for RRM test cases defined in this test specification. For downlink BWP, both initial BWP and dedicated BWP configurations are specified in clause A.8.1 and for uplink BWP, dedicated BWP configurations are specified in clause A.8.2. Parameters not listed in this clause can be derived from the configuration of each test.

A.8.1 Downlink BWP configurations

Table A.8.1-1 defines the different downlink initial BWP configurations. Table A.8.1-2 defines the different downlink dedicated BWP configurations.

Table A.8.1-1: Downlink BWP patterns for initial BWP configuration

BWP Parameters	Unit	Values		
DL BWP		**DLBWP.0.1**	**DLBWP.0.2**	
Starting PRB index		0	RB_c Note 1	
Bandwidth		Same as RF channel defined in each test	same as RMSI CORSET(CORESET #0) defined in each test	
NOTE 1: RB_c is the lowest PRB index to guarantee the BWP including CORESET #0 which is defined in Clause A.1.2.				

Table A.8.1-2: Downlink BWP patterns for dedicated BWP configuration

BWP Parameters	Unit	Values														
DL BWP		**DLBWP.1.1**	**DLBWP.1.2**				**DLBWP.1.3**				**DLBWP.1.4**		**DLBWP.1.7**			
Starting PRB index		0	RB_b Note 1				RB_a Note 2				0		RB_c Note 3			
SSB SCS	kHz		15	30	120	240	15	30	120	240	120	240	15	30	120	240
Bandwidth	RB	Same as RF channel defined for the serving cell in each test	25	51	32	48	25	51	32	48	24	24	25	51	32	48
NOTE 1: RB_b is the lowest PRB index to guarantee the BWP not fully overlapped with SSB PRB index (RBJ, RBJ+1,…., RBJ+19) which is defined in Clause A.3.																
NOTE 2: RB_a is the lowest PRB index to guarantee the BWP including SSB PRB index (RBJ, RBJ+1,…., RBJ+19) which is defined in Clause A.3.																
NOTE 3: RB_c is the PRB index having an offset of 6 PRBs with respect to the start of SSB PRB index (RBJ, RBJ+1,…., RBJ+19) which is defined in Clause A.3.																

A.8.2 Uplink BWP configurations

Table A.8.2-1 defines the uplink initial BWP configurations. Table A.8.2-2 defines the uplink dedicated BWP configurations.

Table A.8.2-1: Uplink BWP patterns for initial BWP configurations

BWP Parameters	Values	
UL BWP	ULBWP.0.1	ULBWP.0.2
Staring PRB index	0	RB_c Note 1
Bandwidth	Same as RF channel defined in each test	same as RMSI CORESET(CORSET #0) defined in each test
NOTE 1: RBc is the lowest PRB index to guarantee the BWP including CORESET #0 which is defined in Clause A.1.2.		

Table A.8.2-2: Uplink BWP patterns for dedicated BWP configurations

BWP Parameters	Unit	Values														
UL BWP		ULBWP.1.1	ULBWP.1.2				ULBWP.1.3				ULBWP.1.4		ULBWP.1.7			
Staring PRB index		0	RB_b Note 1				RB_a Note 2				0		RB_c Note 3			
SSB SCS	kHz		15	30	120	240	15	30	120	240	120	240	15	30	120	240
Bandwidth	RB	Same as RF channel defined for the serving cell in each test	25	51	32	48	25	51	32	48	24	24	25	51	32	48
NOTE 1: RB_b is the lowest PRB index to guarantee the BWP not fully overlapped with SSB PRB index (RBJ, RBJ+1,…., RBJ+19) which is defined in Clause A.3.																
NOTE 2: RB_a is the lowest PRB index to guarantee the BWP including SSB PRB index (RBJ, RBJ+1,…., RBJ+19) which is defined in Clause A.3.																
NOTE 3: RB_c is the PRB index having an offset of 6 PRBs with respect to the start of SSB PRB index (RBJ, RBJ+1,…., RBJ+19) which is defined in Clause A.3.																

A.8A Reference BWP configurations for RedCap

This clause provides the typical BWP configurations used for RedCap RRM test cases defined in Annex A. RedCap downlink dedicated BWP configurations are specified in clause A.8A.1 and RedCap uplink dedicated BWP configurations are specified in clause A.8A.2. Other parameters not listed in this clause can be derived from the set up of each test.

A.8A.1 Downlink BWP configurations

Table A.8A.1-1: Downlink BWP patterns for RedCap dedicated BWP configuration

BWP Parameters	Unit	Values											
DL BWP		DLBWP.1.1 RedCap				DLBWP.1.2 RedCap				DLBWP.1.3 RedCap			
Starting PRB index		RB_a Note 1				RB_b Note 2				RB_c Note 3			
SSB SCS	kHz	15	30	120	240	15	30	120	240	15	30	120	240
Bandwidth	RB	25	25	32	16	25	25	32	16	25	25	32	16
NOTE 1: RB_a is the lowest PRB index to guarantee the BWP including SSB PRB index (RB_J, RB_{J+1},…., RB_{J+19}) which is defined in Clause A.3.													
NOTE 2: RB_b is the lowest PRB index to guarantee the BWP not fully overlapped with SSB PRB index (RB_J, RB_{J+1},…., RB_{J+19}) which is defined in Clause A.3.													
NOTE 3: RB_c is the lowest PRB index to guarantee the BWP including SSB PRB index (RB_J, RB_{J+1},…., RB_{J+19}) which is defined in Clause A.3A.													

A.8A.2 Uplink BWP configurations

Table A.8A.2-1: Uplink BWP patterns for dedicated BWP configurations

BWP Parameters	Unit	Values											
UL BWP		ULBWP.1.1 RedCap				ULBWP.1.2 RedCap				ULBWP.1.3 RedCap			
Starting PRB index		RB_a Note 1				RB_b Note 2				RB_c Note 3			
SSB SCS	kHz	15	30	120	240	15	30	120	240	15	30	120	240
Bandwidth	RB	25	25	32	16	25	25	32	16	25	25	32	16
NOTE 1: RB_a is the same as RB_a for DLBWP.1.1 RedCap.													
NOTE 2: RB_b is the same as RB_b for DLBWP.1.2 RedCap.													
NOTE 3: RB_c is the same as RB_c for DLBWP.1.3 RedCap.													

A.9 Angle of Arrival (AoA) for FR2 RRM test cases

This clause specifies the AoA setups for FR2 RRM test cases in clause 5 and 7. The applicable AoA setup is defined in each test case in clause 5 and 7.

A.9.1 Setup 1: Single AoA in Rx beam peak direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, are aligned to the UE Rx beam peak direction (as defined in TS 38.101-2 [3]).

A.9.2 Setup 2: Single AoA in non Rx beam peak direction

A.9.2.1 Setup 2a: Single AoA in non Rx beam peak direction without change in direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, align to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] for each UE power class. The direction (AoA) of the signals shall not be changed between test iterations.

A.9.2.2 Setup 2b: Single AoA in non Rx beam peak direction with change in direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, align to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] for each UE power class. For UE power class 3, the direction (AoA) of the signals shall be changed for each test iteration (for UE power classes other than 3, this is FFS). Unless otherwise specified by the test case, the TE shall alternate between a minimum of 33 different AoAs. The minimum separation between AoAs used in consecutive iterations shall be 30° in great-circle distance.

NOTE: if it is not possible to find at least 33 different test points meeting the required criteria (FFS), the test shall alternate between all the available test points.

A.9.3 Setup 3: 2 AoAs

There are 2 active probes in the test. The DL signals, and noise if applicable, transmitted from the two active probes, align to directions (AoAs) which are from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] for each UE power class. The relative angular offset between the directions (AoAs) of the 2 active probes, shall be changed for each test iteration. Unless otherwise specified by the test case, the TE shall alternate between a minimum of 33 different test points. A test point comprehends the relative angular offset between the active probes, and the AoA of each of the signals from the UE point of view. The relative angular offset between the active probes shall change for consecutive test points.

The applicable set of relative angular offsets between the 2 active probes is given in Table A.9.3-1 for each UE power class.

Table A.9.3-1: Set of relative angular offsets between active probes for each power class

UE Power class	Relative angular offset between active probes
1	30°, 60°, 90° and 120°
2	FFS
3	30°, 60°, 90°, 120° and 150°
4	FFS

NOTE: if it is not possible to find at least 33 different test points meeting the required criteria (that is, the two AoAs are from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] and the angular offset between them corresponds to one of the offsets in Table A.9.3-1 for the corresponding UE power class), the test shall alternate between all the available test points.

A.9.4 Setup 4: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak

A.9.4.1 Setup 4a: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak without change in direction

There are 2 active probes in the test. The DL signals, and noise if applicable, are transmitted from the two active probes. One probe is aligned to the UE Rx beam peak direction as defined in TS 38.101-2 [3]. The second is aligned to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] for each UE power class. The direction (AoA) of the non Rx beam peak signal shall not be changed between test iterations.

A.9.4.2 Setup 4b: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak with change in direction

There are 2 active probes in the test. The DL signals, and noise if applicable, are transmitted from the two active probes. One probe is aligned to the UE Rx beam peak direction as defined in TS 38.101-2 [3]. The second is aligned to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] for each UE power class.

For UE power class 3, the relative angular offset between the directions (AoAs) of the 2 active probes shall be changed for each test iteration, within the probe alignment described above. The applicable set of relative angular offsets between the 2 active probes is given in Table A.9.3-1 for each UE power class. Unless otherwise specified by the test case, the TE shall alternate between a minimum of 5 different test points. A test point comprehends the relative angular offset between the active probes, and the AoA of each of the signals from the UE point of view, one of them being the Rx beam peak direction. The relative angular offset between the active probes shall change for consecutive test points.

NOTE: if it is not possible to find at least 5 different test points meeting the required criteria (that is, the two AoAs are from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] and the angular offset between them corresponds to one of the offsets in Table A.9.3-1 for the corresponding UE power class), the test shall alternate between all the available test points.

A.9.5 Setup 5: 2 AoAs for simultaneous reception with QCL Type-D

There are 2 active probes in the test. The DL signals, and noise if applicable, are transmitted from the two active probes. The 2 AoAs (AoA1 and AoA2) for simultaneous reception with different QCL-typeD are from the set of AoA pairs, denoted by (AoA1, AoA2) that can support 2 AoA reception for UE declared AoA angular separation and declared orientation in the positioner of the test system according to the spherical coverage requirement for simultaneous reception from multiple directions as defined in clause 7.3K.3 of TS 38.101-2 [3] for UE power class 3 supporting simultaneous reception from multiple directions. The angular separation between the directions (AoA1 and AoA2) of the 2 active probes is declared from Table 7.3K.3-1 in clause 7.3K.3 of TS 38.101-2 [3] and shall not be changed for each test iteration.

AoA1 needs to satisfy the spherical coverage requirement in Table 7.3.4.3-1 of TS 38.101-2 [3].

NOTE: The chosen AoA pair (AoA1, AoA2) is up to RAN5.

A.9.6 Setup 6: 3 AoAs for simultaneous reception with different QCL Type-D

There are 3 active probes in the test and the DL signals and noise are transmitted from the three active probes.

Out of the three AoAs, one AoA (AoA1) is aligned to a direction which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] for UE power class 3 and other 2 AoAs (AoA2 and AoA3) are from the set of AoA pairs, denoted by (AoA2, AoA3) that can support 2 AoA reception for UE declared AoA angular separation and declared orientation in the positioner of the test system according to the spherical coverage requirement for simultaneous reception from multiple directions as defined in clause 7.3K.3 of TS 38.101-2 [3] for power class 3 supporting simultaneous reception from multiple directions.

The angular offset between the directions of the AoA pair (AoA2, AoA3) is declared from Table 7.3K.3-1 in clause 7.3K.3 of TS 38.101-2 [3] and shall not be changed for each test iteration.

NOTE: The chosen AoA pair (AoA2, AoA3) is up to RAN5.

A.9.7 Setup 7: 3 AoAs

There are 3 active probes in the test. The DL signals, and noise if applicable, transmitted from the three active probes, align to directions (AoAs) which are from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [3] for each UE power class. The relative angular offset between the directions (AoAs) of the 3 active probes, shall be changed for each test iteration. Any combinations of two relative angular offsets between 2 active probes specified in Table A.9.3-1, is considered as a valid applicable relative angular offsets between 3 active probes for the respective power class.

A.10 TCI State Configuration

A.10.1 Introduction

This clause provides the configurations for TCI states towards either SSB or CSI-RS. The TCI states defined in this clause are configured in each test when applicable to indicate that certain DL signals are quasi-collocated with the referenceSignal configured in the TCI states.

A.10.2 TCI states

Table A.10.2-1: TCI States

Parameter	TCI.State.0	TCI.State.1	TCI.State.2	TCI.State.3
tci-StateId	Id0	Id1	Id2	Id3
qcl-Type1	typeC	typeC	typeA	typeA
qcl-Type2[Note1]	typeD	typeD	typeD	typeD
referenceSignal	SSB0	SSB1	Resource #4 in TRS resource set 1 [Note3]	Resource #4 in TRS resource set 2 [Note3]

NOTE 1: qcl-Type2 of typeD only where applicable. For RRM test cases, this will be only in FR2
NOTE 2: referenceSignal configurations towards which the TCI states are configured are defined in a test-specific manner.
NOTE 3: Reference TRS resource sets are defined in A.1.4A, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1.

A.10A Unified TCI State Configuration

A.10A.1 Introduction

This clause provides the configurations for unified TCI states towards either SSB or CSI-RS. The DLorJoint TCI states defined in this clause are configured in each test when applicable to indicate that certain DL (and UL, if joint DL/UL

operation is configured) signals are QCL'ed with the referenceSignal configured in the TCI states. The UL TCI states defined in this clause are configured in each test when applicable to indicate that certain UL signals are QCL'ed with the referenceSignal configured in the TCI states.

A.10A.2 DLorJoint TCI states

Table A.10A.2-1: DLorJoint TCI States

Parameter	DLorJoint TCI.State.0	DLorJoint TCI.State.1	DLorJoint TCI.State.2	DLorJoint TCI.State.3	DLorJoint TCI.State.4	DLorJoint TCI.State.5
tci-StateUnifiedId	Id0	Id1	Id2	Id3	Id4	Id5
qcl-Type1	typeA	typeA	typeA	typeA	typeC	typeC
qcl-Type2 Note1	typeD	typeD	typeD	typeD	typeD	typeD
referenceSignal Note2	Resource #4 in TRS resource set 1 Note3	Resource #4 in TRS resource set 2 Note 5	Resource #4 in TRS resource set 1 Note3	Resource #4 in TRS resource set 2 Note3	SSB0	SSB1 from the cell with different PCI
pathlossReferenceRS	N/A	N/A	Resource #4 in TRS resource set 1 Note3	Resource #4 in TRS resource set 1 Note3	N/A	N/A
additionalPCI	N/A	configured Note4	N/A	N/A	N/A	configured Note4

Note 1: qcl-Type2 of typeD only where applicable. For RRM test cases, this will be only in FR2
Note 2: referenceSignal configurations towards which the TCI states are configured are defined in a test-specific manner.
Note 3: Reference TRS resource sets are defined in A.1.4A, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1. The TCI state of the TRS is the DLorJoint TCI.State.4.
Note 4: Only one PCI than serving cell PCI is included in the additionalPCIList, and the additionalPCIIndex is configured as 0.
Note 5: Reference TRS resource sets are defined in A.1.4A, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1. The TCI state of the TRS is the DLorJoint TCI.State.5.

A.10A.3 UL TCI states

Table A.10A.3-1: UL TCI States

Parameter	UL TCI.State.0	UL TCI.State.1	UL TCI.State.2	UL TCI.State.3	UL TCI.State.4	UL TCI.State.5
ul-TCIState-Id	Id0	Id1	Id2	Id3	Id4	Id5
referenceSignal Note1	SSB0	SSB1	Resource #4 in TRS resource set 1 Note2	Resource #4 in TRS resource set 2 Note2	Resource #4 in TRS resource set 3 Note2	Resource #4 in TRS resource set 4 Note2
pathlossReferenceRS	Resource #4 in TRS resource set 1 Note2	Resource #4 in TRS resource set 1 Note2	Resource #4 in TRS resource set 1 Note2	Resource #4 in TRS resource set 2 Note2	Resource #4 in TRS resource set 3 Note2	Resource #4 in TRS resource set 4 Note2
additionalPCI	N/A	configured Note3	N/A	N/A	N/A	N/A

Note 1: referenceSignal configurations towards which the UL TCI states are configured are defined in a test-specific manner.
Note 2: Reference TRS resource sets are defined in A.1.4A, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1.
Note 3: Only one PCI than serving cell PCI is included in the additionalPCIList, and the additionalPCIIndex is configured as 0.

A.10B LTM Candidate TCI State Configuration

A.10B.1 Introduction

This clause provides the configurations for TCI states of LTM candidate cell(s) towards either SSB or TRS. The LTM candidate DLorJoint TCI states defined in this clause are configured in each test when applicable to indicate that certain DL (and UL, if joint DL/UL operation is configured) signals are QCL'ed with the referenceSignal configured in the TCI states. The UL TCI states defined in this clause are configured in each test when applicable to indicate that certain UL signals are QCL'ed with the referenceSignal configured in the TCI states.

A.10B.2 LTM candidate DLorJoint TCI states

Table B.10B.2-1: LTM candidate DLorJoint TCI States

Parameter	Candidate DLorJoint TCI.State.0	Candidate DLorJoint TCI.State.1	Candidate DLorJoint TCI.State.2	Candidate DLorJoint TCI.State.3
Candidatetci-StateId	Id0	Id1	Id2	Id3
qcl-Type1	typeA	typeA	typeA	typeA
referenceSignal of qcl-Type 1 Note2	SSB0	Resource #4 in TRS resource set 1 Note3	SSB0	Resource #4 in TRS resource set 1 Note3
qcl-Type2 Note1	typeD	typeD	typeD	typeD
referenceSignal of qcl-Type2 Note2	SSB0	Resource #4 in TRS resource set 1 Note3	SSB0	Resource #4 in TRS resource set 1 Note3
pathlossReferenceRS	SSB0	SSB0	N/A	N/A
additionalPCI	N/A	N/A	N/A	N/A

Note 1: qcl-Type2 of typeD only where applicable. For RRM test cases, this will be only in FR2
Note 2: referenceSignal configurations towards which the TCI states are configured are defined in a test-specific manner.
Note 3: Reference TRS resource sets are defined in A.1.4A, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured for a candidate cell in a test case, it is considered as resource set 1. The TCI state of the TRS is the CandidateDLorJoint TCI.State.2.

A.10B.3 LTM candidate UL TCI states

Table A.10B.3-1: LTM candidate UL TCI States

Parameter	Candidate UL TCI.State.0
Candidateul-TCIState-Id	Id0
referenceSignal Note1	SSB0
pathlossReferenceRS	SSB0
additionalPCI	N/A

Note 1: referenceSignal configurations towards which the UL TCI states are configured are defined in a test-specific manner.

A.11 NR sidelink communication

A.11.1 Introduction

This clause also defines the principle and the reference configurations that are applicable to test cases verifying RRM core requirements for V2X sidelink communication.

A.11.2 Reference resource pool configurations for NR Sidelink Communication

Table A.11.2-1: NR sidelink SL-BWP configuration

Field	Value	Comment
SL-BWP-ConfigCommon-r16		
sl-BWP-Generic-r16		
sl-LengthSymbols-r16	sym14	All 14 symbols in a slot without S-SSB are used for sidelink
sl-StartSymbol-r16	sym0	Symbol #0 is the starting symbol used for sidelink in a slot without S-SSB
sl-BWP-PoolConfigCommon-r16		
sl-RxPool-r16		Indicates the resource pool for reception on the configured BWP. 1 entry
SL-ResourcePool-r16[1]	Set according to Table A.11.2-2	Entry 1
sl-TxPoolSelectedNormal-r16		Indicates the resources pool for mode 2 sidelink communication on the configured BWP. 1 entry
SL-ResourcePoolConfig-r16[1]		Entry 1
sl-ResourcePool-r16	Set according to Table A.11.2-3	
sl-TxPoolExceptional-r16	Not present	

Table A.11.2-2:NR sidelink resource pool configuration

Field	Value	Comment
SL-ResourcePool-r16		
sl-PSCCH-Config-r16	Set according to Table A.11.3-1	
sl-PSSCH-Config-r16	Set according to Table A.11.3-2	
sl-PSFCH-Config-r16	Not present	
sl-SyncAllowed-r16		Indicates the allowed synchronization reference(s) which is (are) allowed to use the configured resource pool.
gnss-Sync-r16	true	
gnbEnb-Sync-r16	true	
ue-Sync-r16	true	
sl-SubchannelSize-r16	n10	Subchannel bandwidth is 10 RB
sl-StartRB-Subchannel-r16	0	The offset of lowest RB index of the subchannel with the lowest index in the resource pool with respect to the lowest RB index of a SL BWP
sl-NumSubchannel-r16	1	Number of subchannels for SL transmission
sl-UE-SelectedConfigRP-r16		
sl-Thres-RSRP-List-r16	Set according to the specific test configuration	Indicates a list of 64 thresholds, and the threshold should be selected based on the priority in the decoded SCI and the priority in the SCI to be transmitted. A resource is excluded if it is indicated or reserved by a decoded SCI and PSSCH RSRP in the associated data resource is above a threshold.
sl-MultiReserveResource-r16	Not present	
sl-MaxNumPerReserve-r16	n2	At most 2 PSCCH/PSSCH resources can be reserved by a single SCI.
sl-SensingWindow-r16	ms100	Length of resource sensing window specified in TS 38.214 [9] subclause 8.1.4. which is 100ms.

sl-SelectionWindowList-r16		Parameter that determines the end of the selection window for each priority level 8 entries
SL-SelectionWindowConfig-r16[k,k=1..8]		entry k
sl-Priority-r16	k	priority k
sl-SelectionWindow-r16	n20	Length of resource selection window specified in TS 38.214 [9] subclause 8.1.4. which is $20 \cdot 2^{\mu}$slots, where μ=0,1,2,3 refers to SCS 15,30,60,120 kHz respectively
sl-ResourceReservePeriodList-r16	Not present	
sl-RS-ForSensing-r16	pssch	PSSCH-RSRP measurement is used in the sensing operation.
sl-RxParametersNcell	Not present	
sl-ZoneConfigMCR-List-r16	Not present	
sl-PreemptionEnable-r16	enabled	
sl-MinMaxMCS-List-r16		1 entry
SL-MinMaxMCS-Config-r16[1]		Entry 1
sl-MCS-Table-r16	qam64	TS 38.214 [9] Table 5.1.3.1-1 is the MCS table used in the resource pool.
sl-TimeResource-r16	11111111111111 111111	Every slot in a period of 20 slots during a SFN or DFN cycle can be used for sidelink

Table A.11.3-3: NR sidelink UE autonomous resource selection configuration

Field	Value	Comment
SL-UE-SelectedConfig-r16		
sl-PSSCH-TxConfigList-r16		1 entry
SL-PSSCH-TxConfig-r16[1]		Entry 1
sl-TypeTxSync-r16	Not present	When this filed is absent, the configuration is applicable for all synchronization reference types.
sl-ThresUE-Speed-r16	kmph200	UE shall apply the parameters in sl-ParametersAboveThres-r16 if UE absolute speed is higher than 200 km/h, otherwise UE shall apply the parameters in sl-ParametersBelowThres-r16
sl-ParametersAboveThres-r16		
sl-MinMCS-PSSCH-r16	0	The minimum MCS index value can be used for PSSCH transmission.
sl-MaxMCS-PSSCH-r16	15	The maximum MCS index value can be used for PSSCH transmission.
sl-MinSubChannelNumPSSCH-r16	1	The minimum number of subchannels can be used for PSSCH transmission.
sl-MaxSubchannelNumPSSCH-r16	1	The maximum number of subchannels can be used for PSSCH transmission.
sl-MaxTxTransNumPSSCH-r16	1	The maximum transmission number for PSSCH (including new transmission and retransmission).
sl-MaxTxPower-r16	Not present	Not applicable
sl-ParametersBelowThres-r16		
sl-MinMCS-PSSCH-r16	4	Same as above
sl-MaxMCS-PSSCH-r16	25	Same as above
sl-MinSubChannelNumPSSCH-r16	1	Same as above
sl-MaxSubchannelNumPSSCH-r16	1	Same as above
sl-MaxTxTransNumPSSCH-r16	1	Same as above
sl-MaxTxPower-r16	Not present	Same as above
sl-ProbResourceKeep-r16	v0dot8	The probability of UE keeping current resource is 80% when the resource reselection counter reaches 0 (see TS 38.321 [12]).

sl-ReselectAfter-r16	n1	Resource reselection is triggered after 1 sidelink transmission is skipped (see TS 38.321 [12]).

A.11.3 Reference measurement channels for NR Sidelink Communication

Table A.11.3-1: PSCCH Reference Measurement Channels

Parameter		Unit	Value
Reference channel			CC.1A HD
Channel bandwidth		MHz	Note2
Number of PSCCH symbols per slot			2
Number of PSCCH RB			10
Modulation			QPSK
Information Bit Payload (without CRC)		Bits	26
Information Bit	Number of DMRS ports		0 (1 port)
	Priority		As set by higher layers
	Resource reservation period		N/A
	Modulation and coding scheme		Set as the PSSCH MCS specified in the test
	DMRS pattern		0 (2 DMRS)
	2nd stage SCI format		00 (SCI format 2-A)
	Beta offset indicator		Set as specified in the test
	Frequency resource assignment		Set as per PSSCH RB allocation specific in the test
	Time resource assignment		Set as per PSSCH slot allocation specific in the test
	Reserved bits		Set all these bits to 0
Transport block CRC		Bits	24
Binary Channel Bits (Note 1)		Bits	360
Note 1: Binary channel bits calculated under assumption of 2 CP-OFDM symbols per subframe. Note 2: Channel bandwidth depends on test configuration.			

Table A.11.3-2: PSSCH Reference Measurement Channels

Parameter	Unit	Value
Reference channel		CD.1A HD
Sidelink transmission mode		2
Channel bandwidth	MHz	Note1
Allocated PSSCH resource blocks		10
Number of PSSCH symbols per slot		10
Modulation		QPSK
Target Code Rate		1/3
Information Bit Payload (Transport block size)	Bits	672
Transport block CRC	Bits	24
Number of PSSCH HARQ retransmissions		0
Binary Channel Bits	Bits	2160
Note 1: Channel bandwidth depends on test configuration. Note 2: 2nd state SCI and PSFCH are not allocated per slot.		

A.12 Discovery Burst Transmission Window configuration under CCA

A.12.1 DBT Window pattern 1: DBT Window period = 20 ms with DBT Window duration = 1 ms

Table A.12.1-1: DBT.1: DBT Window Pattern 1 for DBT Window period = 20 ms and duration = 1 ms

SMTC Parameters	Values
Discovery burst transmission window periodicity	20 ms
Discovery burst transmission window offset	0 ms
Discovery burst transmission window duration	1 ms

A.13 Channel bandwidth (CBW) configurations

A.13.1 DL UE specific CBW

Table A.13.1-1: DL CBW patterns for UE specific CBW configuration

BWP Parameters	Unit	Values	
Reference CBW		DLCBW.1.1	DLCBW.1.2
OffsetToCarrier	RB	RB_y Note 2	RB_x Note 1
carrierBandwidth	RB	Same as RF channel defined in each test	Same as RF channel defined in each test
Note 1: RB_x is offset in frequency domain between Point A (lowest subcarrier of common RB 0) and the lowest usable subcarrier on this carrier. Note that RB_x has to be within the CBW of BS.			
Note 2: RB_y is offset in frequency domain between Point A (lowest subcarrier of common RB 0) and the lowest usable subcarrier on this carrier. Note that RB_y has to be within the CBW of BS and different with RB_x, and CBW should include SSB and CORESET#0.			

A.13.2 UL UE specific CBW

Table A.13.2-1: UL CBW patterns for UE specific CBW configuration

BWP Parameters	Unit	Values	
Reference CBW		ULCBW.1.1	ULCBW.1.2
OffsetToCarrier	RB	RB_y Note 2	RB_x Note 1
carrierBandwidth	RB	Same as RF channel defined in each test	Same as RF channel defined in each test
Note 1: RB_x is offset in frequency domain between Point A (lowest subcarrier of common RB 0) and the lowest usable subcarrier on this carrier. Note that RB_x has to be within the CBW of BS.			
Note 2: RB_y is offset in frequency domain between Point A (lowest subcarrier of common RB 0) and the lowest usable subcarrier on this carrier. Note that RB_y has to be within the CBW of BS and different with RB_x.			

A.14 Satellite access configuration

Table A.14.1-1: SSC.1: Satellite specific configuration pattern 1 for serving cell in GSO scenario

Parameter	SSC.1
Interval between adjacent epoch time	10.24s
ntn-UlSyncValidityDuration	900s
cellSpecificKoffset	258 slots
ta-Common	0

ta-CommonDrift	0
ta-CommonDriftVariant	0
ntn-PolarizationDL	linear
ntn-PolarizationUL	linear
ephemerisInfo	Detailed ephemeris information is provided in TS 38.508-1 [14]

Table A.14.1-2: SSC.2: Satellite specific configuration pattern 2 for serving cell in NGSO scenario

Parameter	SSC.2
Interval between adjacent epoch time	2.56s
ntn-UlSyncValidityDuration	5s
cellSpecificKoffset	14 slots
ta-Common	0
ta-CommonDrift	0
ta-CommonDriftVariant	0
ntn-PolarizationDL	linear
ntn-PolarizationUL	linear
ephemerisInfo	Detailed ephemeris information is provided in TS 38.508-1 [14]

A.14.2 Satellite specific configuration for neighbour cell

Table A.14.2-1: NSC.1: Satellite specific configuration pattern 1 for neighbour cell in GSO scenario

Parameter	NSC.1
Interval between adjacent epoch time	10.24s
ntn-UlSyncValidityDuration	900s
cellSpecificKoffset	258 slots
ta-Common	0
ta-CommonDrift	0
ta-CommonDriftVariant	0
ntn-PolarizationDL	linear
ntn-PolarizationUL	linear
ephemerisInfo	Detailed ephemeris information is provided in TS 38.508-1 [14]

Table A.14.2-2: NSC.2: Satellite specific configuration pattern 2 for neighbour cell in NGSO scenario

Parameter	NSC.2
Interval between adjacent epoch time	2.56s
ntn-UlSyncValidityDuration	5s
cellSpecificKoffset	14 slots
ta-Common	0
ta-CommonDrift	0
ta-CommonDriftVariant	0
ntn-PolarizationDL	linear
ntn-PolarizationUL	linear
ephemerisInfo	Detailed ephemeris information is provided in TS 38.508-1 [14]

A.15 SRS Configurations

A.15.1 SRS Configuration for SCS=15kHz

Table A.15.1-1: Sounding Reference Symbol Configuration for SCS=15kHz

	SRS.1 TDD	SRS.4 TDD	POS-SRS.1	
Field	**Value**	**Value**		**Comment**
c-SRS	12	12	Same as NRB,c in the test case	
b-SRS	0	0	n.a.	
b-hop	0	0	n.a.	Frequency hopping is disabled
groupOrSequenceHopping	neither	neither	neither	No group or sequence hopping
freqDomainPosition	0	0	0	Frequency domain position of SRS
freqDomainShift	0	0	0	
pathlossReferenceRS ssb-Index	0	0	0	SSB #0 is used for SRS path loss estimation
usage	antennaSwitching	antennaSwitching	n.a.	
startPosition	1	1	5	resourceMapping setting
nrofSymbols	1	1	4	SRS symbols belong to the same SRS resource.
repetitionFactor	n1	n1	n.a.	without repetition.
transmissionComb	n2	n2	n4	
combOffset	0	0	0	transmissionComb setting
cyclicShift	0	0	0	
nrofSRS-Ports	port1	port1	port1	Number of antenna ports used for SRS resource transmission
resourceType	Periodic	Aperiodic	Periodic	
periodicityAndOffset-p	sl40, 1	N/A	sl160, 20	SRS transmission periodicity

A.15.2 SRS Configuration for SCS=30kHz

Table A.15.2-1: Sounding Reference Symbol Configuration for SCS=30kHz

	SRS.2 TDD	SRS.5 TDD	POS-SRS.2	
Field	**Value**	**Value**		**Comment**
c-SRS	24	24	Same as NRB,c in the test case	
b-SRS	0	0	n.a.	
b-hop	0	0	n.a.	Frequency hopping is disabled
groupOrSequenceHopping	neither	neither	neither	No group or sequence hopping
freqDomainPosition	0	0	0	Frequency domain position of SRS

freqDomainShift	0	0	0	
pathlossReferenceRS ssb-Index	0	0	0	SSB #0 is used for SRS path loss estimation
usage	antennaSwitching	antennaSwitching	n.a.	
startPosition	3	3	5	resourceMapping setting
nrofSymbols	1	1	4	SRS symbols belong to the same SRS resource.
repetitionFactor	n1	n1	n.a.	without repetition.
transmissionComb	n2	n2	n4	
combOffset-n2	0	0	0	transmissionComb setting
cyclicShift-n2	0	0	0	
nrofSRS-Ports	port1	port1	port1	Number of antenna ports used for SRS resource transmission
resourceType	Periodic	Aperiodic	Periodic	
periodicityAndOffset-p	sl80, 3	N/A	Sl320, 40	SRS transmission periodicity

A.15.3 SRS Configuration for SCS=30kHz

Table A.15.3-1: Sounding Reference Symbol Configuration for SCS=120kHz

	SRS.3 TDD	**SRS.6 TDD**	**POS-SRS.3**	
Field	**Value**	**Value**		**Comment**
c-SRS	17	17	Same as NRB,c in the test case	
b-SRS	0	0	n.a.	
b-hop	0	0	n.a.	Frequency hopping is disabled
groupOrSequenceHopping	neither	neither	neither	No group or sequence hopping
freqDomainPosition	0	0	0	Frequency domain position of SRS
freqDomainShift	0	0	0	
pathlossReferenceRS ssb-Index	0	0	0	SSB #0 is used for SRS path loss estimation
usage	antennaSwitching	antennaSwitching	n.a.	
startPosition	1	1	5	resourceMapping setting
nrofSymbols	1	1	4	SRS symbols belong to the same SRS resource.
repetitionFactor	n1	n1	n.a.	without repetition.
transmissionComb	n2	n2	n4	
combOffset-n2	0	0	0	transmissionComb setting
cyclicShift-n2	0	0	0	
nrofSRS-Ports	port1	port1	port1	Number of antenna ports used for SRS resource transmission
resourceType	Periodic	Aperiodic	Periodic	
periodicityAndOffset-p	sl320, 3	N/A	Sl1280, 160	SRS transmission periodicity

A.16 CSI-RS configurations for RRM

A.16.1 FDD

Table A.16.1-1: CSI-RS RRM Reference Measurement Channels for SCS=15kHz

	CSI-RS.RRM.FR1.1 FDD
CSI-RS-ResourceConfigMobility	
subcarrierSpacing, kHz	15
CSI-RS-CellMobility	
cellId[note1]	0
nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 [note2]	slot1
associatedSSB	True
ssb-Index [note3]	0
isQuasiColocated	True
firstOFDMSymbolInTimeDomain [note4]	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0
Note1: unless specified otherwise Note2: unless specified otherwise Note3: assume the same SS/PBCH block index of the corresponding cell in the test case Note4: unless specified otherwise	

A.16.2 TDD

Table A.16.2-1: CSI-RS RRM Reference Measurement Channels for SCS=15kHz

	CSI-RS.RRM.FR1.1 TDD
CSI-RS-ResourceConfigMobility	
subcarrierSpacing, kHz	15
CSI-RS-CellMobility	
cellId[note1]	0
nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 [note2]	slot1
associatedSSB	True
ssb-Index [note3]	0
isQuasiColocated	True
firstOFDMSymbolInTimeDomain [note4]	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0
Note1: unless specified otherwise Note2: unless specified otherwise	

Note3:	assume the same SS/PBCH block index of the corresponding cell in the test case
Note4:	unless specified otherwise

Table A.16.2-2: CSI-RS RRM Reference Measurement Channels for SCS=30kHz

	CSI-RS.RRM.FR1.2 TDD
CSI-RS-ResourceConfigMobility	
subcarrierSpacing, kHz	30
CSI-RS-CellMobility	
cellId[note1]	0
nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 [note2]	slot1
associatedSSB	True
ssb-Index [note3]	0
isQuasiColocated	True
firstOFDMSymbolInTimeDomain [note4]	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0

Note1: unless specified otherwise
Note2: unless specified otherwise
Note3: assume the same SS/PBCH block index of the corresponding cell in the test case
Note4: unless specified otherwise

Table A.16.2-3: CSI-RS RRM Reference Measurement Channels for SCS=120kHz

	CSI-RS.RRM.FR2.1 TDD
CSI-RS-ResourceConfigMobility	
subcarrierSpacing, kHz	120
CSI-RS-CellMobility	
cellId[note1]	0
nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 [note2]	slot1
associatedSSB	True
ssb-Index [note3]	0
isQuasiColocated	True
firstOFDMSymbolInTimeDomain [note4]	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0

Note1: unless specified otherwise
Note2: unless specified otherwise
Note3: assume the same SS/PBCH block index of the corresponding cell in the test case
Note4: unless specified otherwise

A.17 Reference Cell DTX configurations

A.17.1 Cell DTX Configuration 1: Cell DTX cycle = 160 ms and TAT = Infinity

Table A.17.1-1: DTX.1: Cell DTX cycle = 160 ms and time alignment timer (TAT) = Infinity

Field	Value
cellDTXDRX-onDurationTimer	1 ms
cellDTXDRX-CycleStartOffset	160 ms
cellDTXDRXconfigType-r18	dtx
cellDTXDRXactivationStatus	activated
Note: This Cell DTX configuration is applicable for NR serving cell. The Cell DTX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [13].	

A.18 Spatial Relation Configuration

A.18.1 Introduction

This clause provides the configurations for spatial relation towards either SSB or CSI-RS. The spatial relation defined in this clause are configured in each test when applicable to indicate spatial setting for certain UL signals with the referenceSignal configured in the spatial relation.

A.18.2 Spatial Relation

Table A.18.2-1: PUCCH Spatial Relation

Parameter	PUCCH.SRI.0	PUCCH.SRI.1
pucch-SpatialRelationInfoId	Id0	Id1
referenceSignal	SSB0	SSB1
PUCCH-PathlossReferenceRS	SSB0	SSB1
Note 1: referenceSignal configurations towards which the spatial relation are configured in a test-specific manner.		

Table A.18.2-2: SRS Spatial Relation

Parameter	SRS.SRI0	SRS.SRI1
srs-SpatialRelationInfoId	Id0	Id1
referenceSignal	SSB0	SSB1
Note 1: referenceSignal configurations towards which the spatial relation are configured in a test-specific manner.		

Annex B (normative): Conditions for RRM requirements applicability for operating bands

B.1 Conditions for NR RRC_IDLE state mobility

B.1.1 Introduction

In Annex B.1, the following conditions are specified:

- UE conditions which shall apply for UE intra-frequency idle state mobility test cases in clauses 6.1 and 7.1,
- UE conditions which shall apply for UE inter-frequency idle state mobility test cases in clauses 6.1 and 7.1.
- UE conditions which shall apply for RedCap UE intra-frequency idle state mobility test cases in clauses 16.1 and 17.1.
- UE conditions which shall apply for RedCap UE inter-frequency idle state mobility test cases in clauses 16.1 and 17.1.

B.1.2 Conditions for measurements on NR intra-frequency cells for cell re-selection

Editor's notes for Table B.1.2-2 (RAN4 dependant):

- The value of Y for power class 4 is FFS, where Y_4 is the rough/fine beam gain difference in Rx beam peak direction for power class 4
- The value of Z for power class 4 is FFS, where Z_4 is the rough/fine beam gain difference in spherical coverage directions for power class 4

This clause defines the following conditions for NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.1.2-1 for FR1 NR cells.

The conditions are defined in Table B.1.2-2 for FR2 NR cells.

Table B.1.2-1: Conditions for intra-frequency cell re-selection in FR1

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-124	-121	≥ -4
	NR_FDD_FR1_B	-123.5	-120.5	
	NR_TDD_FR1_C	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	
	NR_FDD_FR1_F	-121.5	-118.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	
	NR_FDD_FR1_H	-120.5	-117.5	
	NR_FDD_FR1_N	-117.5	-114.5	
NOTE 1: NR operating band groups are defined in Clause 3A.4.				

Table B.1.2-2: Conditions for intra-frequency cell re-selection in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3		SSB Ês/Iot
			dBm / SCS_{SSB}		dB
			SCS_{SSB} = 120 kHz	SCS_{SSB} = 240 kHz	
			UE Power class	UE Power class	

			1	2	3	4	1, 2, 3, 4	
Conditions	Rx Beam Peak	n257	-107.3	-110.8	-109.1	-124.8+Y_4	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-107.3	-110.8	-109.1	-124.8+Y_4		
		n259			-105.5			
		n260	-104.3		-106.5	-122.8+Y_4		
		n261	-107.3	-110.8	-109.1	-124.8+Y_4		
	Spherical coverage Note 1	n257	-99.3	-99.8	-98.2	-115.8+Z_4	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-99.3	-99.8	-98.2	-115.8+Z_4		
		n259			-92.7			
		n260	-96.3		-93.9	-110.8+Z_4		
		n261	-99.3	-99.8	-98.2	-115.8+Z_4		

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

B.1.3 Conditions for measurements on NR inter-frequency cells for cell re-selection

This clause defines the following conditions for NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions defined in Table B.1.2-1 for FR1 NR intra-frequency cell re-selection shall also apply for FR1 NR inter-frequency cells in this clause.

The conditions defined in Table B.1.2-2 for FR2 NR intra-frequency cell re-selection shall also apply for FR2 NR inter-frequency cells in this clause.

B.1.4 Conditions for measurements on NR intra-frequency cells for cell re-selection for RedCap

This clause defines the following conditions for RedCap NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.1.4-1 and Table B.1.4-2 for 1 Rx and 2 Rx RedCap respectively for FR1 NR cells.

The conditions are defined in Table B.1.4-3 for FR2 NR cells.

Table B.1.4-1: Conditions for intra-frequency cell re-selection in FR1 for RedCap for 2Rx

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB

Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	-124	-121	≥ -4
	NR_FDD_RC_FR1_B	-123.5	-120.5	
	NR_FDD_ RC_FR1_C, NR_TDD_RC_FR1_C	-123	-120	
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	-122.5	-119.5	
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	-122	-119	
	NR_FDD_RC_FR1_F	-121.5	-118.5	
	NR_FDD_RC_FR1_G	-121	-118	
	NR_FDD_RC_FR1_H	-120.5	-117.5	
NOTE 1: NR operating band groups are defined in 38.133 [6] clause 3.5.2.				

Table B.1.4-2: Conditions for intra-frequency cell re-selection in FR1 for RedCap for 1Rx

Parameter	**NR operating band groups** Note1	**Minimum SSB_RP**		**SSB Ês/Iot**
		dBm / SCS_{SSB}		**dB**
		SCS_{SSB} = 15 kHz	**SCS_{SSB} = 30 kHz**	
Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	-124	-121	≥ -4
	NR_FDD_RC_FR1_B	-123.5	-120.5	
	NR_FDD_ RC_FR1_C, NR_TDD_RC_FR1_C	-123	-120	
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	-122.5	-119.5	
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	-122	-119	
	NR_FDD_RC_FR1_F	-121.5	-118.5	
	NR_FDD_RC_FR1_G	-121	-118	
	NR_FDD_RC_FR1_H	-120.5	-117.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.1.4-3: Conditions for intra-frequency cell re-selection in FR2 for RedCap

Parameter	**Angle of arrival**	**NR operating bands**	**Minimum SSB_RP** Note 2, Note 3						**SSB Ês/Iot**
			dBm / SCS_{SSB}						**dB**
			SCS_{SSB} = 120 kHz					**SCS_{SSB} = 240 kHz**	
			UE Power class						
			1	**2**	**3**	**4**	**5**	**7**	**1,2,3, 4,5,7**
Conditions	Rx Beam Peak	n257	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.4+Y_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB
		n258	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	-120.6+Y_5	TBD	
		n261	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4		TBD	
	Spherical coverage Note 1	n257	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.4+Z_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB
		n258	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	-112.6+Z_5	TBD	
		n261	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4		TBD	
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met. NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise. NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].										

Editor's notes for Table B.1.4-3 (RAN4 dependant):

- The value of Y for power class 4 is FFS, where Y4is the rough/fine beam gain difference in Rx beam peak direction for power class 4

- The value of Z for power class 4 is FFS, where Z4 is the rough/fine beam gain difference in spherical coverage directions for power class 4

B.1.5 Conditions for measurements on NR inter-frequency cells for cell re-selection for RedCap

This clause defines the following conditions for NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions defined in Table B.1.4-1 and Table B.1.4-2 for 1 Rx and 2 Rx RedCap respectively for FR1 RedCap NR intra-frequency cell re-selection shall also apply for FR1 RedCap NR inter-frequency cells in this clause.

The conditions defined in Table B.1.4-3 for FR2 RedCap NR intra-frequency cell re-selection shall also apply for FR2 RedCap NR inter-frequency cells in this clause.

B.1.6 Conditions for measurements on NR intra-frequency cells for cell re-selection for satellite access

This clause defines the following conditions for NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.1.6-1 for FR1 NR cells.

Table B.1.6-1: Conditions for intra-frequency cell re-selection in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB
Conditions	NR_FDD_SAB_FR1_A	-124	-121	≥ -4
NOTE 1: NR operating band groups for satellite access are defined in clause 3A.4.1A.				

B.1.7 Conditions for measurements on NR inter-frequency cells for cell re-selection for satellite access

This clause defines the following conditions for NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions defined in Table B.1.6-1 for FR1 NR intra-frequency cell re-selection for satellite access shall also apply for FR1 NR inter-frequency cells for satellite access in this clause.

B.1.8 Conditions for measurements on NR intra-frequency cells for cell re-selection under CCA

This clause defines the following conditions for NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.1.8-1 for FR1 NR cells under CCA.

Table B.1.8-1: Conditions for intra-frequency cell re-selection in FR1 under CCA

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB
Conditions	NR_CCA_FR1_I	-120	-117	≥ -4
	NR_CCA_FR1_J	-119.5	-116.5	

NOTE 1: NR operating band groups are as defined in clause 3A.4.1.

B.1.9 Conditions for measurements on NR inter-frequency cells for cell re-selection under CCA

This clause defines the following conditions for NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions defined in Table B.1.8-1 for FR1 NR intra-frequency cells under CCA shall also apply to FR1 NR inter-frequency cells under CCA in this clause.

B.2 Conditions for NR RRC_CONNECTED state

B.2.1 Introduction

In Annex B.2, the following conditions are specified:

- UE conditions which shall apply for UE intra-frequency measurement procedures and measurement performance tests in clauses 4.6, 4.7, 5.6, 5.7, 6.6, 6.7, 7.6 and 7.7,

  UE conditions which shall apply for UE inter-frequency measurements procedures and requirements in Clause 9,

- UE conditions which shall apply for UE intra-frequency measurements performance requirements in Clause 10,

- UE conditions which shall apply for UE inter-frequency measurements performance requirements in Clause 10.

B.2.2 Conditions for NR intra-frequency measurements

Editor's notes for Table B.2.2-2 (RAN4 dependant):

- The value of Y for power class 4 is FFS, where Y_4 is the rough/fine beam gain difference in Rx beam peak direction for power class 4

- The value of Z for power class 4 is FFS, where Z_4 is the rough/fine beam gain difference in spherical coverage directions for power class 4

This clause defines the following conditions for NR intra-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.2-2 for FR2 NR cells.

Table B.2.2-1: Conditions for intra-frequency measurements in FR1

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-127	-124	≥ -6
	NR_FDD_FR1_B	-126.5	-123.5	
	NR_TDD_FR1_C	-126	-123	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	
	NR_FDD_FR1_F	-124.5	-121.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-121	
	NR_FDD_FR1_H	-123.5	-120.5	
	NR_FDD_ FR1_N	-120.5	-117.5	
NOTE 1: NR operating band groups are defined in Clause 3A.4.				

Table B.2.2-2: Conditions for intra-frequency measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3				SSB Ês/Iot
			dBm / SCS_{SSB}				dB
			SCS_{SSB} = 120 kHz				SCS_{SSB} = 240 kHz
			UE power class				UE power class
			1	2	3	4	1, 2, 3, 4
Conditions	Rx Beam Peak	n257	-110.3	-113.8	-112.1	-127.8+Y_4	(Value for SCS_{SSB} = 120 kHz) +3dB
		n258	-110.3	-113.8	-112.1	-127.8+Y_4	
		n259			-108.5		
		n260	-107.3		-109.5	-125.8+Y_4	
		n261	-110.3	-113.8	-112.1	-127.8+Y_4	
	Spherical coverage Note 1	n257	-102.3	-102.8	-101.2	-118.8+Z_4	(Value for SCS_{SSB} = 120 kHz) +3dB
		n258	-102.3	-102.8	-101.2	-118.8+Z_4	
		n259			-95.7		
		n260	-99.3		-96.9	-113.8+Z_4	
		n261	-102.3	-102.8	-101.2	-118.8+Z_4	

Conditions	Rx Beam Peak	n257	-110.3	-113.8	-112.1	-127.8+Y_4	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-6
		n258	-110.3	-113.8	-112.1	-127.8+Y_4		
		n259			-108.5			
		n260	-107.3		-109.5	-125.8+Y_4		
		n261	-110.3	-113.8	-112.1	-127.8+Y_4		
	Spherical coverage Note 1	n257	-102.3	-102.8	-101.2	-118.8+Z_4	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-6
		n258	-102.3	-102.8	-101.2	-118.8+Z_4		
		n259			-95.7			
		n260	-99.3		-96.9	-113.8+Z_4		
		n261	-102.3	-102.8	-101.2	-118.8+Z_4		

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and spherical coverage values are increased by $\Delta MB_{S,n}$ the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

B.2.3 Conditions for NR inter-frequency measurements

Editor's notes for Table B.2.3-2 (RAN4 dependant):

- The value of Y for power class 4 is FFS, where Y_4 is the rough/fine beam gain difference in Rx beam peak direction for power class 4

- The value of Z for power class 4 is FFS, where Z_4 is the rough/fine beam gain difference in spherical coverage directions for power class 4

This clause defines the following conditions for NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.3-1 for FR1 NR cells.

The conditions are defined in Table B.2.3-2 for FR2 NR cells.

Table B.2.3-1: Conditions for inter-frequency measurements in FR1

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-125	-122	≥ -4
	NR_FDD_FR1_B	-124.5	-121.5	
	NR_TDD_FR1_C	-124	-121	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-124.5	-120.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-123	-120	
	NR_FDD_FR1_F	-122.5	-119.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-122	-119	
	NR_FDD_FR1_H	-121.5	-118.5	
	NR_FDD_ FR1_N	-118.5	-115.5	

NOTE 1: NR operating band groups are defined in Clause 3A.4.

Table B.2.3-2: Conditions for inter-frequency measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3	SSB Ês/Iot
			dBm / SCS_{SSB}	dB

			SCS_{SSB} = 120 kHz				SCS_{SSB} = 240 kHz	
			UE power class				UE power class	
			1	2	3	4	1, 2, 3, 4	
Conditions	Rx Beam Peak	n257	-108.3	-111.8	-110.1	-125.8+Y_4	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-108.3	-111.8	-110.1	-125.8+Y_4		
		n259			-106.5			
		n260	-105.3		-107.5	-123.8+Y_4		
		n261	-108.3	-111.8	-110.1	-125.8+Y_4		
	Spherical coverage Note 1	n257	-100.3	-100.8	-99.2	-116.8+Z_4	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-100.3	-100.8	-99.2	-116.8+Z_4		
		n259			-93.7			
		n260	-97.3		-94.9	-111.8+Z_4		
		n261	-100.3	-100.8	-99.2	-116.8+Z_4		

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

B.2.4 Conditions for NR L1-RSRP reporting

B.2.4.1 Conditions for SSB based L1-RSRP reporting

Editor's notes for Table B.2.4.1-2 (RAN4 dependant):

- The value of Y for power class 4 is FFS, where Y_4 is the rough/fine beam gain difference in Rx beam peak direction for power class 4

- The value of Z for power class 4 is FFS, where Z_4 is the rough/fine beam gain difference in spherical coverage directions for power class 4

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.4.1-1 for FR1 NR cells.

The conditions are defined in Table B.2.4.1-2 for FR2 NR cells.

Table B.2.4.1-1: Conditions for SSB based L1-RSRP measurements in FR1

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	
	NR_TDD_FR1_C	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	
	NR_FDD_FR1_F	-121.5	-118.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	
	NR_FDD_FR1_H	-120.5	-117.5	
	NR_FDD_ FR1_N	-117.5	-114.5	

NOTE 1: NR operating band groups are defined in clause 3A.4

Table B.2.4.1-2: Conditions for SSB based L1-RSRP measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3		SSB Ês/Iot
			dBm / SCS_{SSB}		
			SCS_{SSB} = 120 kHz	SCS_{SSB} = 240 kHz	dB
			UE power class	UE power class	

			1	2	3	4	1, 2, 3, 4	
Conditions	Rx Beam Peak	n257	-107.3	-110.8	-109.1	-124.8+Y_4	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-3
		n258	-107.3	-110.8	-109.1	-124.8+Y_4		
		n259			-105			
		n260	-104.3		-106.5	-122.8+Y_4		
		n261	-107.3	-110.8	-109.1	-124.8+Y_4		
	Spherical coverage Note 1	n257	-99.3	-99.8	-98.2	-115.8+Z_4	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-3
		n258	-99.3	-99.8	-98.2	-115.8+Z_4		
		n259			-92.3			
		n260	-96.3		-93.9	-110.8+Z_4		
		n261	-99.3	-99.8	-98.2	-115.8+Z_4		
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met. NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise. NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].								

B.2.4.2 Conditions for CSI-RS based L1-RSRP reporting

Editor's notes for Table B.2.4.2-2 (RAN4 dependant):

- The value of Y for power class 4 is FFS, where Y_4 is the rough/fine beam gain difference in Rx beam peak direction for power class 4

- The value of Z for power class 4 is FFS, where Z_4 is the rough/fine beam gain difference in spherical coverage directions for power class 4

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on CSI-RS: CSI-RS_RP and CSI-RS Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.4.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.4.2-2 for FR2 NR cells.

Table B.2.4.2-1: Conditions for CSI-RS based L1-RSRP measurements in FR1

Parameter	NR operating band groups Note1	Minimum CSI-RS_RP			CSI-RS Ês/Iot
		dBm / SCS_{CSI-RS}			dB
		SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	-118	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	-117.5	
	NR_TDD_FR1_C	-123	-120	-117	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	-116.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	-116	
	NR_FDD_FR1_F	-121.5	-118.5	-115.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	-115	
	NR_FDD_FR1_H	-120.5	-117.5	-114.5	
	NR_FDD_ FR1_N	-117.5	-114.5	-111.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.					

Table B.2.4.2-2: Conditions for CSI-RS based L1-RSRP measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI-RS_RP Note 2, Note 3		CSI-RS Ês/Iot
			dBm / SCS_{CSI-RS}		dB
			SCS_{CSI-RS} = 60 kHz	SCS_{CSI-RS} = 120 kHz	
			UE power class	UE power class	

			1	2	3	4	1, 2, 3, 4	
Conditions	Rx Beam Peak	n257	-110.3	-113.8	-112.1	-127.8+Y_4	(Value for SCS_{CSI-RS} = 60 kHz) +3dB	≥-3
		n258	-110.3	-113.8	-112.1	-127.8+Y_4		
		n259			-108.5			
		n260	-107.3		-109.5	-125.8+Y_4		
		n261	-110.3	-113.8	-112.1	-127.8+Y_4		
	Spherical coverage Note 1	n257	-102.3	-102.8	-101.2	-118.8+Z_4	(Value for SCS_{CSI-RS} = 60 kHz) +3dB	≥-3
		n258	-102.3	-102.8	-101.2	-118.8+Z_4		
		n259			-95.7			
		n260	-99.3		-96.9	-113.8+Z_4		
		n261	-102.3	-102.8	-101.2	-118.8+Z_4		
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met. NOTE 2: Values specified at the Reference point to give minimum CSI-RS Ês/Iot, with no applied noise. NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].								

B.2.5 Conditions for RRC connection release with redirection to NR

Editor's notes for Table B.2.5.2-2:

- The value of Y for power class 4 is FFS, where Y_4 is the rough/fine beam gain difference in Rx beam peak direction for power class 4

- The value of Z for power class 4 is FFS, where Z_4 is the rough/fine beam gain difference in spherical coverage directions for power class 4

This clause defines the following conditions for RRC connection release with redirection to NR: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.5-1 for FR1 NR cells.

The conditions are defined in Table B.2.5-2 for FR2 NR cells.

Table B.2.5-1: Conditions for RRC connection release with redirection to NR in FR1

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-125	-122	≥ -4
	NR_FDD_FR1_B	-124.5	-121.5	
	NR_TDD_FR1_C	-124	-121	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-124.5	-120.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-123	-120	
	NR_FDD_FR1_F	-122.5	-119.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-122	-119	
	NR_FDD_FR1_H	-121.5	-118.5	
	NR_FDD_ FR1_N	-118.5	-115.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.5-2: Conditions for RRC connection release with redirection to NR in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3					SSB Ês/Iot
			dBm / SCS_{SSB}					dB
			SCS_{SSB} = 120 kHz				SCS_{SSB} = 240 kHz	
			UE power class				UE power class	
			1	2	3	4	1, 2, 3, 4	
Conditions		n257	-108.3	-111.8	-110.1	-125.8+Y_4		≥-4

	Rx Beam Peak	n258	-108.3	-111.8	-110.1	-125.8+Y_4	(Value for SCS_{SSB} = 120 kHz) +3dB	
		n259			-106.5			
		n260	-105.3		-107.5	-123.8+Y_4		
		n261	-108.3	-111.8	-110.1	-125.8+Y_4		
	Spherical coverage Note 1	n257	-100.3	-100.8	-99.2	-116.8+Z_4	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-100.3	-100.8	-99.2	-116.8+Z_4		
		n259			-93.7			
		n260	-97.3		-94.9	-111.8+Z_4		
		n261	-100.3	-100.8	-99.2	-116.8+Z_4		
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met. NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise. NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].								

B.2.6 Conditions for UE transmit timing

B.2.6.1 Conditions for SSB based UE transmit timing

Editor's notes for Table B.2.6.1-2:

- The value of Y for power class 4 is FFS, where Y_4 is the rough/fine beam gain difference in Rx beam peak direction for power class 4

- The value of Z for power class 4 is FFS, where Z_4 is the rough/fine beam gain difference in spherical coverage directions for power class 4

This clause defines the following conditions for UE transmit timing adjustment performed based on SSBs: SSB_RP and SSB Ês/Iot and applicable for a corresponding operating band.

The conditions are defined in Table B.2.6.1-1 for FR1 SSB.

Table B.2.6.1-1: Conditions for SSB based UE transmit timing in FR1

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB}=15 kHz	SCS_{SSB}=30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	
	NR_TDD_FR1_C	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	
	NR_FDD_FR1_G	-121	-118	
	NR_FDD_FR1_H	-120.5	-117.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

The conditions are defined in Table B.2.6.1-2 for FR2 SSB.

Table B.2.6.1-2: Conditions for SSB based UE transmit timing in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3					SSB Ês/Iot
			dBm / SCS_{SSB}					dB
			SCS_{SSB} = 120 kHz				SCS_{SSB} = 240 kHz	
			UE power class				UE power class	
			1	2	3	4	1, 2, 3, 4	
Conditions	Rx Beam Peak	n257	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-3
		n258	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4		
		n259			-105.5			
		n260	-122.3+Y_1		-106.5	-122.8+Y_4		

		n261	-125.3+Y_1	-110.8	-109.1	-124.8+Y_4		
	Spherical coverage Note 1	n257	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-3
		n258	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4		
		n259			-92.7			
		n260	-114.3+Z_1		-93.9	-110.8+Z_4		
		n261	-117.3+Z_1	-99.8	-98.2	-115.8+Z_4		
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met. NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise. NOET 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].								

B.2.7 Conditions for NR intra-frequency measurements for RedCap

This clause defines the following conditions for RedCap NR intra-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.7-1 and Table B.2.7-2 for 1 Rx and 2 Rx RedCap respectively for FR1 NR cells.

The conditions are defined in Table B.2.7-3 for FR2 NR cells.

Table B.2.7-1: Conditions for intra-frequency cell re-selection in FR1 for RedCap for 1 Rx

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	-127	-124	≥ -6
	NR_FDD_RC_FR1_B	-126.5	-123.5	
	NR_TDD_RC_FR1_C	-126	-123	
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	-125.5	-122.5	
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	-125	-122	
	NR_FDD_RC_FR1_F	-124.5	-121.5	
	NR_FDD_RC_FR1_G	-124	-121	
	NR_FDD_RC_FR1_H	-123.5	-120.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.7-2: Conditions for intra-frequency cell re-selection in FR1 for RedCap for 2Rx

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	-127	-124	≥ -6
	NR_FDD_RC_FR1_B	-126.5	-123.5	
	NR_TDD_RC_FR1_C	-126	-123	
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	-125.5	-122.5	
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	-125	-122	
	NR_FDD_RC_FR1_F	-124.5	-121.5	
	NR_FDD_RC_FR1_G	-124	-121	
	NR_FDD_RC_FR1_H	-123.5	-120.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.7-3: Conditions for intra-frequency measurements in FR2 for RedCap

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3							SSB Ês/Iot
			dBm / SCS_{SSB}							dB
			SCS_{SSB} = 120 kHz						SCS_{SSB} = 240 kHz	
			UE Power class							
			1	2	3	4	5	7	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.4+Y_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-6
		n258	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4	-123.6+Y_5	TBD		
		n261	-128.3+Y_1	-113.8	-112.1	-127.8+Y_4		TBD		
	Spherical coverage Note 1	n257	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.4+Z_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-6
		n258	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4	-115.6+Z_5	TBD		
		n261	-120.3+Z_1	-102.8	-101.2	-118.8+Z_4		TBD		

Note 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.
Note 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.
Note 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.7-2 (RAN4 dependent):

- The value of Y for power class 4 is FFS, where Y_4 is the rough/fine beam gain difference in Rx beam peak direction for power class 4

- The value of Z for power class 4 is FFS, where Z_4 is the rough/fine beam gain difference in spherical coverage directions for power class 4

B.2.8 Conditions for NR inter-frequency measurements for RedCap

This clause defines the following conditions for RedCap NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.8-1 and Table B.2.8-2 for 1 Rx and 2 Rx RedCap for FR1 NR cells.

The conditions are defined in Table B.2.8-3 for FR2 NR cells.

Table B.2.8-1: Conditions for inter-frequency measurements in FR1 for 1 Rx RedCap

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	-125	-122	≥ -4

	NR_FDD_RC_FR1_B	-124.5	-121.5
	NR_TDD_RC_FR1_C	-124	-121
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	-124.5	-120.5
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	-123	-120
	NR_FDD_RC_FR1_F	-122.5	-119.5
	NR_FDD_RC_FR1_G	-122	-119
	NR_FDD_RC_FR1_H	-121.5	-118.5
NOTE 1: NR operating band groups are defined in clause 3.5.2.			

Table B.2.8-2: Conditions for inter-frequency measurements in FR1 for 2 Rx RedCap

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_RC_FR1_A, NR_TDD_RC_FR1_A	-125	-122	≥ -4
	NR_FDD_RC_FR1_B	-124.5	-121.5	
	NR_TDD_RC_FR1_C	-124	-121	
	NR_FDD_RC_FR1_D, NR_TDD_RC_FR1_D	-124.5	-120.5	
	NR_FDD_RC_FR1_E, NR_TDD_RC_FR1_E	-123	-120	
	NR_FDD_RC_FR1_F	-122.5	-119.5	
	NR_FDD_RC_FR1_G	-122	-119	
	NR_FDD_RC_FR1_H	-121.5	-118.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.8-3: Conditions for inter-frequency measurements in FR2 for RedCap

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3							SSB Ês/Iot
			dBm / SCS_{SSB}							dB
			SCS_{SSB} = 120 kHz						SCS_{SSB} = 240 kHz	
			UE Power class							
			1	2	3	4	5	7	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4	-121.4+Y_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4	-121.6+Y_5	TBD		
		n261	-126.3+Y_1	-111.8	-110.1	-125.8+Y_4		TBD		
	Spherical coverage Note 1	n257	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4	-113.4+Z_5	TBD	(Value for SCS_{SSB} = 120 kHz) +3dB	≥-4
		n258	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4	-113.6+Z_5	TBD		
		n261	-118.3+Z_1	-100.8	-99.2	-116.8+Z_4		TBD		
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met. NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.										

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.3-2 (RAN4 dependent):

- The value of Y for power class 4 is FFS, where Y_4 is the rough/fine beam gain difference in Rx beam peak direction for power class 4

- The value of Z for power class 4 is FFS, where Z_4 is the rough/fine beam gain difference in spherical coverage directions for power class 4

B.2.9 Conditions for NR intra-frequency measurements under CCA

This clause defines the following conditions for NR intra-frequency measurements under CCA and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.9-1 for NR cells under CCA.

Table B.2.9-1: Conditions for intra-frequency measurements under CCA

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB
Conditions	NR_CCA_FR1_I	-123	-120	≥ -6
	NR_CCA_FR1_J	-122.5	-119.5	
NOTE 1: NR operating band groups are as defined in clause 3A.4.1.				

B.2.10 Conditions for NR inter-frequency measurements under CCA

This clause defines the following conditions for NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.10-1 for NR cells under CCA.

Table B.2.10-1: Conditions for inter-frequency measurements under CCA

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	dB
Conditions	NR_CCA_FR1_I	-121	-118	≥ -4
	NR_CCA_FR1_J	-120.5	-117.5	
NOTE 1: NR operating band groups are as defined in clause 3A.4.1.				

B.2.11 Conditions for NR L1-RSRP reporting under CCA

B.2.11.1 Conditions for SSB based L1-RSRP reporting

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on SSBs under CCA: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.11.1-1 for NR cells under CCA.

Table B.2.11.1-1: Conditions for SSB based L1-RSRP measurements under CCA

Parameter	NR operating band groups Note1	Minimum SSB_RP	SSB Ês/Iot

		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_CCA_FR1_I	-120	-117	≥ -3
	NR_CCA_FR1_J	-119.5	-116.5	
NOTE 1: NR operating band groups are defined in clause 3A.4.1.				

B.2.12 to B.2.16

B.2.17 Conditions for NR intra-frequency measurements for satellite access

This clause defines the following conditions for NR intra-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.17-1 for FR1 NR cells.

Table B.2.17-1: Conditions for intra-frequency measurements in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-127	-124	≥ -6
NOTE 1: NR operating band groups for satellite access are defined in clause 3A.4.1A.				

B.2.18 Conditions for NR inter-frequency measurements for satellite access

This clause defines the following conditions for NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.18-1 for FR1 NR cells.

Table B.2.18-1: Conditions for inter-frequency measurements in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-125	-122	≥ -4
NOTE 1: NR operating band groups for satellite access are defined in clause 3A.4.1A.				

B.2.19 Conditions for NR L1-RSRP reporting for satellite access

B.2.19.1 Conditions for SSB based L1-RSRP reporting for satellite access

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.19.1-1 for FR1 NR cells.

Table B.2.19.1-1: Conditions for SSB based L1-RSRP measurements in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-124	-121	≥ -3

NOTE 1: NR operating band groups for satellite access are defined in clause 3A.4.1A.

B.2.19.2 Conditions for CSI-RS based L1-RSRP reporting for satellite access

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on CSI-RS: CSI-RS_RP and CSI-RS Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.19.2-1 for FR1 NR cells.

Table B.2.19.2-1: Conditions for CSI-RS based L1-RSRP measurements in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum CSI-RS_RP			CSI-RS Ês/Iot
		dBm / SCS_{CSI-RS}			dB
		SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz	
Conditions	NR_FDD_SAB_FR1_A	-124	-121	-118	≥ -3
NOTE 1: NR operating band groups for satellite access are defined in clause 3A.4.1A.					

B.2.20 Conditions for RRC connection release with redirection to NR for satellite access

This clause defines the following conditions for RRC connection release with redirection to NR: SSB_RP and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.20-1 for FR1 NR cells.

Table B.2.20-1: Conditions for RRC connection release with redirection to NR in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum SSB_RP		SSB Ês/Iot
		dBm / SCS_{SSB}		dB
		SCS_{SSB} = 15 kHz	SCS_{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-125	-122	≥ -4
NOTE 1: NR operating band groups for satellite access are defined in clause 3A.4.1A.				

B.3 RRM requirement exceptions

B.3.1 Introduction

Annex B.3 covers exceptions for the side conditions based on receiver sensitivity for CA, DC, and SUL.

B.3.2 Receiver sensitivity relaxation for CA

B.3.2.1 Receiver sensitivity relaxation for UE supporting CA in FR1

For a UE supporting inter-band carrier aggregation configuration with uplink in NR band, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c}$>0 dB as defined in TS 38.101-1 [18, Clause 7.3A.3], the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta=\Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

For a UE supporting CA configuration in FR1, the requirement in this clause applies for both SC and CA operation.

B.3.2.2 Receiver sensitivity relaxation for UE configured with CA in FR1

B.3.2.2.1 Inter-band carrier aggregation

For a UE configured with inter-band carrier aggregation with active uplink in NR band, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c}$>0 dB as defined in TS 38.101-1, Clause 7.3A.3 [2], the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta=\Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

If the relaxation Δ specified in this clause applies, then the relaxation specified in Clause B.3.2.1 should not be applied.

B.3.2.2.2 Reference sensitivity exceptions due to UL harmonic interference for CA

In this clause, requirements exceptions are described for the UE configured with a band in FR1 when it is impacted by UL harmonic interference from another band in FR1 of the same CA configuration.

A relevant side condition (SSB_RP and Io) in a requirement shall be increased by the amount Δ=L2-L1, where L1 is the reference sensitivity level specified in TS 38.101-1 [2], Clause 7.3.2, and L2 is the reference sensitivity level based on the requirements in TS 38.101-1 [2], Clause 7.3A.4, when the following conditions are fulfilled,

- corresponding downlink component carriers on different NR bands are configured with CA and active,
- the uplink is configured in the NR low operating band and is active,
- the uplink configuration is as specified in TS 38.101-1 [2], Clause 7.3A.4, and
- the exception requirements specified in TS 38.101-1 [2], Clause 7.3A.4 apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in Clause B.3.2.1 should not be applied.

B.3.2.2.3 Reference sensitivity exceptions due to intermodulation interference due to 2UL CA

In this clause, requirements exceptions are described for the UE with an inter-band carrier aggregation with uplink assigned to two NR bands.

A relevant side condition (SSB_RP and Io) in a requirement shall be increased by the amount Δ=L2-L1, where L1 is the reference sensitivity level specified in TS 38.101-1 [2], Clause 7.3.2, and L2 is the reference sensitivity level based on the requirements in TS 38.101-1 [2], Clause 7.3A.5, when the following conditions are fulfilled,

- corresponding downlink component carriers on different bands are configured with CA and active,
- uplinks are assigned to two NR bands,
- the exception requirements specified in TS 38.101-1 [2], Clause 7.3A.5 apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in Clause B.3.2.1 should not be applied.

B.3.2.3 Receiver sensitivity relaxation for UE supporting CA in FR2

Editor's note: TBD

B.3.2.4 Receiver sensitivity relaxation for UE configured with CA in FR2

B.3.2.4.1 Intra-band contiguous carrier aggregation

For a UE configured with intra-band contiguous carrier aggregation in NR band in FR2, if there is a relaxation of receiver sensitivity ΔR_{IB}>0 dB as defined in TS 38.101-2 [3], Clause 7.3A.2.1 depending on the aggregated channel bandwidth, the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta=\Delta R_{IB}$ defined for the corresponding downlink NR bands.

B.3.2.4.2 Intra-band non-contiguous carrier aggregation

For a UE configured with intra-band non-contiguous carrier aggregation in NR band in FR2, if there is a relaxation of receiver sensitivity ΔR_{IB}>0 dB as defined in TS 38.101-2 [3], Clause 7.3A.2.1 depending on the aggregated channel

bandwidth, the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta=\Delta R_{IB}$ defined for the corresponding downlink NR bands.

B.3.3 Receiver sensitivity relaxation for DC

Editor's note: TBD

B.3.4 Receiver sensitivity relaxation for SUL

B.3.4.1 Receiver sensitivity relaxation for UE supporting SUL in FR1

For a UE supporting a SUL configuration in FR1, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c}>0$ dB as defined in TS 38.101-1 [2], Clause 7.3C.3, the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta=\Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

For a UE supporting a SUL configuration in FR1, the requirement in this clause applies for both SC and SUL operation.

B.3.4.2 Receiver sensitivity relaxation for UE configured with SUL in FR1

B.3.4.2.1 Reference sensitivity exceptions due to UL harmonic interference for SUL

In this clause, requirements exceptions are described for the UE with a band in FR1 when it is impacted by UL harmonic interference from another band in FR1 of the same SUL configuration.

A relevant side condition (SSB_RP and Io) in a requirement shall be increased by the amount Δ=L2-L1, where L1 is the reference sensitivity level specified in TS 38.101-1 [2], Clause 7.3.2, and L2 is the reference sensitivity level based on the requirements in TS 38.101-1 [2], Clause 7.3C.2, when the following conditions are fulfilled,

- a downlink component carrier is configured in NR band and is active,
- the uplink is configured in the NR low operating band and is active,
- the uplink configuration is as specified in TS 38.101-1 [2], Clause 7.3C.2, and
- the exception requirements specified in TS 38.101-1 [2], Clause 7.3C.2 apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in Clause B.3.4.1 should not be applied.

B.4 Conditions for NR sidelink

B.4.1 Test parameters for GNSS signals

This clause defines the reference signal power levels of generated satellites for a corresponding GNSS, which will be used in NR sidelink and satellite access test cases.

Table B.4.1-1: GNSS Reference Signal Power Parameters

System	Parameters	Unit	Value
	Number of generated satellites per system	-	6
GPS[Note 1]	Reference signal power level for all satellites	dBm	-128.5
Galileo	Reference signal power level for all satellites	dBm	-127
GLONASS	Reference signal power level for all satellites	dBm	-131
BDS	Reference signal power level for all satellites	dBm	-133
NOTE 1: "GPS" here means GPS L1 C/A, Modernized GPS, or both, dependent on UE capabilities. NOTE 2: The DUT UE does not need to support all systems. The DUT UE shall support at least one system and will be test for the supported systems.			

B.4.2 Conditions for PSBCH-RSRP Accuracy Requirements

This clause defines the following conditions for PSBCH-RSRP measurement accuracy requirements applicable for a corresponding operating band.

The conditions are defined in Table B.4.2-1 for FR1.

Table B.4.2-1: Conditions for PSBCH-RSRP measurements in FR1

Parameter	NR sidelink operating band groups Note1	Minimum S-SSB_RP			S-SSB Ês/Iot
		dBm/SCS$_{S-SSB}$			dB
		SCS$_{S-SSB}$ = 15kHz	SCS$_{S-SSB}$ = 30kHz	SCS$_{S-SSB}$ = 60kHz	
	NR_TDD_FR1_B	-126.5	-123.5	-120.5	≥ -6
	NR_TDD_FR1_J	-122.5	-119.5	-116.5	
NOTE 1: NR sidelink operating band groups are as defined in Section 3A.4 for the corresponding NR operating bands.					

B.4.3 Conditions for Selection/Reselection to Intra-frequency SyncRef UE

This clause defines the S-SSB_RP and S-SSB Ês/Iot applicable for a corresponding operating band.

The conditions for selection/reselection to intra-frequency SyncRef UE are defined in Table B.4.3-1 for FR1.

Table B.4.3-1: NR sidelink synchronization measurements in FR1

Parameter	NR sidelink operating band groups Note1	Minimum S-SSB_RP			S-SSB Ês/Iot
		dBm/SCS$_{S-SSB}$			dB
		SCS$_{S-SSB}$ = 15kHz	SCS$_{S-SSB}$ = 30kHz	SCS$_{S-SSB}$ = 60kHz	
	NR_TDD_FR1_B	-120.5	-117.5	-114.5	≥ 0
	NR_TDD_FR1_J	-116.5	-113.5	-110.5	≥ 0
NOTE 1: NR sidelink operating band groups are as defined in Section 3A.4 for the corresponding NR operating bands.					

B.4.4 Conditions for L1 SL-RSRP Accuracy Requirements

This clause defines the following conditions for L1 SL-RSRP measurement accuracy requirements applicable for a corresponding operating band.

The conditions are defined in Table B.4.4-1 for FR1.

Table B.4.4-1: Conditions for L1 SL-RSRP measurements in FR1

Parameter	NR sidelink operating band groups Note1	Minimum L1 SL-RSRP			Ês/Iot
		dBm/SCS			dB
		SCS= 15kHz	SCS= 30kHz	SCS = 60kHz	
	NR_TDD_FR1_B	-120.5	-117.5	-114.5	≥ 0
	NR_TDD_FR1_J	-116.5	-113.5	-110.5	
NOTE 1: NR sidelink operating band groups are as defined in Section 3A.4 for the corresponding NR operating bands. NOTE 2: The parameter Ês/Iot is the Ês/Iot of PSCCH-DMRS and/or PSSCH-DMRS. NOTE 3: The SCS is for PSCCH and/or PSSCH.					

B.5 High level test procedure for SAN RRM tests

The following high-level steps are conducted for test cases for SAN defined in clause 14.

- A set of ephemeris information are pre-defined for each satellite corresponding to different epoch times in TS 38.508-1 [14] .

- The same ephemeris information will be maintained during the test (constant ephemerisInfo in all SIB19 updates) i.e., SAN RRM test cases are defined with fixed constant Delay and Doppler shift from satellite access node to UE unless otherwise stated.

- The range from which the selected constant Delay is selected is as follows:

  - For GSO an altitude of 35,786km is considered. The range of the one-way delay between UE and satellite is from 119.375ms to 128.79ms.

  - For NGSO an altitude of 600km and 1200km on a circular orbit are considered. The range of the one-way delay between UE and satellite is from 2ms (lowest value for LEO orbit 600km) to 6.67ms (highest value for LEO orbit 1200km).

- The constant Doppler shift (i.e. frequency offset) is derived from the same ephemeris (i.e., orbit emulation) as the Delay.

- UE location is determined for the test. The ephemeris and the UE location should be designed such that elevation angle relative to the UE position shall not be smaller than 30 deg during entire test time.

- Test equipment adjusts the time and frequency of transmission according to pre-defined ephemeris (constant in all SIB19 updates) and UE location..

Annex C (normative): Downlink physical channels and propagation conditions

C.1 Downlink physical channels

C.1.1 General

The following clauses describe the downlink physical channels that are needed for setting a connection and channels that are needed during a connection.

C.1.2 Default downlink signal levels

The downlink power settings in Table C.1.2-1 and Table C.1.2-2 are used unless otherwise specified in a test case for FR1 cell and FR2 cell, respectively. The downlink power settings in Table C.1.2-1 and Table C.1.2-2 are also used for the initial registration for NR /5GC test cases in clauses 6 and 7. For EN-DC test cases in clauses 4 and 5, the E-UTRA power settings used for initial registration are defined in Annex A.6.

For FR1, if the UE has more than one Rx antenna, the downlink signal is applied to each one. All UE Rx antennas shall be connected.

Table C.1.2-1: Default Downlink power levels for NR (FR1)

SCS (kHz)	Parameter	Unit	Value													
	Channel bandwidth	MHz	3		5	10	15	20	25	30	40	50	60	80	90	100
15	Number of RBs		12	15	25	50	75	100	128	160	215	270	N/A	N/A	N/A	N/A
	Channel BW power	dBm	-63	-62	-60	-57	-55	-54	-53	-52	-51	-50	N/A	N/A	N/A	N/A
30	Number of RBs		N/A	N/A	10	24	36	50	64	75	100	128	162	216	243	270
	Channel BW power	dBm	N/A	N/A	-61	-57	-55	-54	-53	-52	-51	-50	-49	-48	-47	-47
60	Number of RBs		N/A	N/A	N/A	10	18	24	30	36	50	64	75	100	120	135
	Channel BW power	dBm	N/A	N/A	N/A	-58	-56	-54	-53	-52	-51	-50	-49	-48	-47	-47
	RS EPRE	dBm/ 15kHz	-85	-85	-85	-85	-85	-85	-85	-85	-85	-85	-85	-85	-85	-85

NOTE 1: The channel bandwidth powers are informative, based on -85dBm/15kHz SS/PBCH SSS EPRE, then scaled according to the number of RBs and rounded to the nearest integer dBm value. Full RE allocation with no boost or deboost is assumed.
NOTE 2: The power level is specified at each UE Rx antenna.
NOTE 3: DL level is applied for any of the Subcarrier Spacing configuration ( ) with the same power spectrum density of -85dBm/15kHz.

Table C.1.2-2: Default Downlink power levels for NR (FR2)

SCS (kHz)		Unit	Channel Bandwidth			
			50 MHz	100 MHz	200 MHz	400 MHz
60	Number of RBs		66	132	264	N/A
	Channel BW power	dBm	-70	-67	-64	N/A
120	Number of RBs		32	66	132	264
	Channel BW power	dBm	-70	-67	-64	-61

	SS/PBCH SSS EPRE	dBm/60kHz	-99	-99	-99	-99
NOTE 1: The channel bandwidth powers are informative, based on -99dBm/60kHz SS/PBCH SSS EPRE, then scaled according to the number of RBs and rounded to the nearest integer dBm value. Full RE allocation with no boost or deboost is assumed. NOTE 2: The power level is specified at the centre of quiet zone. NOTE 3: DL level is applied for any of the Subcarrier Spacing configuration (μ) with the same power spectrum density of –99dBm/60kHz.						

The default signal level uncertainty for FR1 is +/-3dB at each test port, for any level specified. The default signal level uncertainty for FR2 is +/-6dB at centre of quiet zone, for any level specified. If the uncertainty value is critical for the Test purpose, a tighter uncertainty is specified for the related test case in Annex F

C.1.3 Default connection setup

Table C.1.3-1 describes the downlink physical channels that are required for NR connection setup. For EN-DC test cases in clauses 4 and 5, the required E-UTRA downlink physical channels are defined in TS 36.521-3 [26] Annex C.2.

Table C.1.3-1: Downlink physical channels required for NR connection set-up

Physical Channel	EPRE Ratio	Note
PBCH	PBCH_RA = 0 dB	
	PBCH_RB = 0 dB	
PSS	PSS_RA = 0 dB	
SSS	SSS_RA = 0 dB	
PDCCH	PDCCH_RA = 0 dB	
	PDCCH_RB = 0 dB	
	MPDCCH_RB = 0 dB	
PDSCH	PDSCH_RA = 0 dB	
	PDSCH_RB = 0 dB	
DMRS	TBD	
CSI-RS	TBD	
NOTE 1: No boosting is applied		

As common PDSCH and PDCCH configuration parameters the parameters in Table A.1 and C.1.3-2 shall be used to bring up the connection setup for FR1 and FR2 NR cell.

Table C.1.3-2: PDSCH and PDCCH configuration

Parameter	Unit	Value
Number of HARQ processes		8 (TDD) 16 (FDD)
Maximum number of HARQ transmission		5

C.2 Propagation conditions

C.2.0 General

The propagation conditions and channel models for various environments are specified. For each environment a propagation model is used to evaluate the propagation pathless due to the distance. Channel models are formed by combining delay profiles with a Doppler spectrum, with the addition of correlation properties in the case of a multi-antenna scenario.

C.2.1 No interference

The downlink connection between the SS and the UE is without AWGN, and has no fading or multipath effects.

C.2.2 Static propagation conditions

C.2.2.0 General

The downlink connection between the SS and the UE is an AWGN environment (unless otherwise stated) with no fading or multipath effects.

C.2.2.1 UE receiver with 2Rx antenna connectors

For 1 port transmission to UE receiver with 2Rx the channel matrix is defined in the frequency domain by

$$\mathbf{H} = \begin{pmatrix} 1 \\ 1 \end{pmatrix}.$$

For 2 port transmission to UE Receiver with 2Rx the channel matrix is defined in the frequency domain by

$$\mathbf{H} = \begin{pmatrix} 1 & j \\ 1 & -j \end{pmatrix}$$

For 4 port transmission to UE Receiver with 2Rx the channel matrix is defined in the frequency domain by

$$\mathbf{H} = \begin{bmatrix} 1 & 1 & j & j \\ 1 & 1 & -j & -j \end{bmatrix}$$

C.2.2.2 UE receiver with 4Rx antenna connectors

For 1 port transmission to UE receiver with 4Rx the channel matrix is defined in the frequency domain by

$$\mathbf{H} = \begin{bmatrix} 1 \\ 1 \\ 1 \\ 1 \end{bmatrix}.$$

For 2 port transmission to UE Receiver with 4Rx the channel matrix is defined in the frequency domain by

$$\mathbf{H} = \begin{bmatrix} 1 & j \\ 1 & -j \\ 1 & j \\ 1 & -j \end{bmatrix}.$$

For 4 port transmission to UE Receiver with 4Rx the channel matrix is defined in the frequency domain by

$$\mathbf{H} = \begin{bmatrix} 1 & 1 & j & j \\ 1 & 1 & -j & -j \\ 1 & -1 & j & -j \\ 1 & -1 & -j & j \end{bmatrix}.$$

C.2.3 Multi-path fading propagation conditions

Same as defined in TS 38.521-4 [20] clause B.2.

Annex D (normative): Deviations from standard test configuration

D.1 Test cases with different numerologies

TBD

D.2 EN-DC test cases with different EN-DC configurations

D.2.0 General

In clauses 4 and 5, EN-DC test cases may be defined for two component carriers (CCs) as well as for more than two CCs to verify the same RRM requirement.

D.2.1 Principle of testing

If multiple EN-DC test cases are defined for two CCs as well as for more than two CCs to verify the same type of RRM requirement, and this requirement is dependent on the number of CCs, then from the UE performance point of view the test coverage can be considered fulfilled by executing only the EN-DC test cases with the maximum number of CCs in EN-DC supported by the UE. Otherwise if the same type of RRM requirement is independent of the number of CCs then from the UE performance point of view the test coverage can be considered fulfilled by executing only the EN-DC test cases with two CCs in EN-DC supported by the UE.

Editor's Note: The maximum number of CCs that can be used in FR2 tests in EN-DC would depend on the test equipment capability.

D.3 Carrier aggregation test cases with different CA configurations

D.3.0 General

In clauses 6 and 7, carrier aggregation test cases may be defined for two CCs as well as for more than two CCs to verify the same RRM requirement.

D.3.1 Principle of testing

If multiple carrier aggregation test cases are defined for two CCs as well as for more than two CCs to verify the same RRM requirement, and the test requirement is dependent on the number of CCs, then from the UE performance point of view the test coverage can be considered fulfilled by executing only the CA test cases with the maximum number of CCs in CA supported by the UE. Otherwise if the same type of RRM requirement is independent of the number of CCs then from the UE performance point of view the test coverage can be considered fulfilled by executing only the CA test cases with at least two CCs in CA supported by the UE.

Editor's Note: The maximum number of CCs that can be used in FR2 tests in CA would depend on the test equipment capability.

D.4 Antenna connection for 4Rx capable UEs

D.4.0 General

All the tests in this test specification are defined for UEs supporting 2Rx. This clause explains how to apply the 2Rx tests in clauses 4 and 6 to UEs supporting 4Rx antenna ports. No tests are currently specified in clauses 4 or 6 which are

applicable only to 4Rx antenna ports, so 4Rx capable UEs are always tested by reusing tests which were originally specified for 2Rx UEs. Please notice that 4Rx is in general not supported for the test cases in clauses 5 and 7.

D.4.1 Principle of testing

D.4.1.1 Single carrier tests

For 4Rx capable UEs supporting at least one band where 2Rx is supported and 4Rx is not supported, all single carrier tests specified in clauses 4 and 6, except 4.7 and 6.7 shall be tested with 2Rx on any band where 2Rx is supported and 4Rx is not supported, with the antenna connection defined in D.4.2.1. Single carrier tests specified clauses 4.7 and 6.7 are band dependent and shall be tested in all bands supported by the UE, using 2Rx and the antenna connection defined in D.4.2.1 for the bands where 2Rx is supported and 4Rx is not supported, and the antenna connection defined in D.4.2.2 for the bands where 2Rx is not supported.

For 4Rx capable UEs that do not support any band where 2Rx is supported and 4Rx is not supported, all single carrier tests in clauses 4 and 6 shall be tested with 4Rx using the antenna configuration defined in D.4.2.2.For radio link monitoring tests, the SNR levels are modified according to table D.4.1.1-1 and table D.4.1.1-2

Table D.4.1.1-1: Modified parameters for RLM out of sync testing with 4 RX antenna connection

Test case	SNR during T3 (dB)			
	Test 1	Test 2	Test 3	Test 4
4.5.1.1	-18	N/A	N/A	N/A
4.5.1.3	-18	N/A	N/A	N/A
4.5.1.5	-18	N/A	N/A	N/A
4.5.1.7	-18	N/A	N/A	N/A
5.5.1.1	-18	N/A	N/A	N/A
5.5.1.3	-18	N/A	N/A	N/A
5.5.1.5	-18	N/A	N/A	N/A
5.5.1.7	-18	N/A	N/A	N/A
6.5.1.1	-18	N/A	N/A	N/A
6.5.1.3	-18	N/A	N/A	N/A
6.5.1.5	-18	N/A	N/A	N/A
6.5.1.7	-18	N/A	N/A	N/A
7.5.1.1	-18	N/A	N/A	N/A
7.5.1.3	-18	N/A	N/A	N/A
7.5.1.5	-18	N/A	N/A	N/A
7.5.1.7	-18	N/A	N/A	N/A

Table D.4.1.1-2: Modified parameters for RLM in sync single carrier testing with 4 RX antenna connection

Test case	SNR during T3 (dB)		SNR during T4 (dB)	
	Test 1	Test 2	Test 1	Test 2
4.5.1.2	-18	N/A	-8	N/A
4.5.1.4	-18	N/A	-8	N/A
4.5.1.6	-18	N/A	-8	N/A
4.5.1.8	-18	N/A	-8	N/A
5.5.1.2	-18	N/A	-8	N/A
5.5.1.4	-18	N/A	-8	N/A
5.5.1.6	-18	N/A	-8	N/A
5.5.1.8	-18	N/A	-8	N/A
6.5.1.2	-18	N/A	-8	N/A
6.5.1.4	-18	N/A	-8	N/A
6.5.1.6	-18	N/A	-8	N/A
6.5.1.8	-18	N/A	-8	N/A
7.5.1.2	-18	N/A	-8	N/A
7.5.1.4	-18	N/A	-8	N/A
7.5.1.6	-18	N/A	-8	N/A
7.5.1.8	-18	N/A	-8	N/A

Table D.4.1.1-3: Modified parameters for Beam Failure Detection and Link Recovery testing with 4 RX antenna connection

Test case	SNR for RS in set q_0 during T3, T4 and T5.(dB)
	Test 1
4.5.5.1	-15
4.5.5.2	-15
4.5.5.3	-15
4.5.5.4	-15
5.5.5.1	-15
5.5.5.2	-15
5.5.5.3	-15
5.5.5.4	-15
6.5.5.1	-15
6.5.5.2	-15
6.5.5.3	-15
6.5.5.4	-15
7.5.5.1	-15
7.5.5.2	-15
7.5.5.3	-15
7.5.5.4	-15

D.4.1.2 Carrier aggregation tests

For carrier aggregation tests, the antenna connection is selected independently for each cell, the PCell and the SCell(s). If a cell (either PCell or any of the SCell(s)) is on a band where 2Rx is supported and 4Rx is not supported, antenna connection in Clause D.4.2.1 shall be used for this cell. If the cell is on a band where 2Rx is not supported, antenna connection in clause D.4.2.2 shall be used for this cell.

D.4.1.3 EN-DC tests

For all EN-DC tests, the antenna connection is selected independently for each cell. For the E-UTRA PCell, the antenna connection specified in D.4.2.3 shall be used if the PCell is on an E-UTRA band where 2Rx is supported and 4Rx is not supported, and the antenna connection specified in D.4.2.4 shall be used if the PCell is on an E-UTRA band not supporting 2Rx.

For the NR PSCell and SCell(s), the principle of testing is the same as in D.4.1.2.

D.4.2 Antenna connection

D.4.2.1 Antenna connection for NR bands where 2Rx is supported

For NR bands where 2Rx is supported and 4Rx is not supported, the UE shall decide via manufacturer declaration and antenna port configuration which 2 of the 4 antenna ports shall be connected with the downlink signal from the SS. The remaining 2 antenna ports shall be connected to zero input. The parameters and test requirements remain unmodified.

D.4.2.2 Antenna connection for NR bands where only 4Rx is supported

For NR bands where only 4Rx is supported, all 4Rx antenna ports shall be connected to the downlink signal from the SS. The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring tests specified in D.4.1.1 and D.4.1.2, the parameters and test requirements remain unmodified.

D.4.2.3 Antenna connection for E-UTRA bands where 2Rx is supported

For E-UTRAN bands where 2Rx is supported and 4Rx is not supported, the UE shall decide via manufacturer declaration and antenna port configuration which 2 of the 4 antenna ports shall be connected with the downlink signal from the SS. The remaining 2Rx antenna ports shall be connected to zero input. The parameters and test requirements remain unmodified.

D.4.2.4 Antenna connection for E-UTRA bands where only 4Rx is supported

For E-UTRAN bands where only 4Rx is supported, all 4Rx antenna ports shall be connected to the downlink signal from the SS. The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring tests specified in TS36.521-1 [26] clause 3A.4.1.2.1 and 3A.4.1.2.2, the parameters and test requirements remain unmodified.

D.4A Antenna configurations with unlicensed bands for 4Rx capable UEs

D.4A.1 Introduction

All tests in clauses 10, 11, 12 and 13 are specified for UEs supporting 2RX. In this clause, the antenna connection method for applying 2RX tests to UEs supporting 4RX antenna ports is specified. No tests are currently specified in clauses 10, 11, 12 or 13 which are applicable only to 4RX antenna ports, so 4RX capable UEs are always tested by reusing tests which were originally specified for 2RX UEs.

D.4A.2 Principle of Testing

D.4A.2.1 Single Carrier Tests

For 4RX capable UEs supporting at least one 2RX band, the, all single carrier tests specified in clauses 10, 11, 12 and 13 except those in 10.5, 11.6, 12.5 and 13.4, shall be tested on any band where 2RX is supported with the antenna connection specified in D.4A.2.4. For single carrier tests specified in clauses 10.5, 11.6, 12.5 or 13.4, all tests shall be tested with the antenna connection specified in D.4A.2.4 for bands where 2RX is supported, and the antenna connection specified in D.4A.2.5 for bands where 4RX is supported.

For 4RX capable UEs which do not support any 2RX band, all tests specified in clauses 10, 11, 12 and 13 shall be tested using the antenna connection specified in clause D.4A.2.5. For radio link monitoring tests, the SNR levels are modified according to table D.4A.2.1-1 and table D.4A.2.1-2.

Table D.4A.2.1-1: Modified parameters for RLM out of sync testing with 4 RX antenna connection

Test case	SNR during T3 (dB)			
	Test 1	Test 2	Test 3	Test 4
10.3.1.2	-18	N/A	N/A	N/A
10.3.1.4	TBD	N/A	N/A	N/A
11.4.1.2	-18	N/A	N/A	N/A
11.4.1.4	TBD	N/A	N/A	N/A

Table D.4A.2.1-2: Modified parameters for RLM in sync single carrier testing with 4 RX antenna connection

Test case	SNR during T3 (dB)		SNR during T4 (dB)	
	Test 1	Test 2	Test 1	Test 2
10.3.1.3	-18	N/A	-8	N/A
10.3.1.5	TBD	N/A	TBD	N/A
11.4.1.3	-18	N/A	-8	N/A
11.4.1.5	TBD	N/A	TBD	N/A

Table D.4A.2.1-3: Modified parameters for Beam Failure Detection and Link Recovery testing with 4 RX antenna connection

Test case	SNR for RS in set q_0 during T3, T4 and T5 (dB)	
	Test 1	Test 2
10.3.4.1	-15	N/A
10.3.4.2	-15	N/A
11.4.4.1	-15	N/A
11.4.4.2	-15	N/A

D.4A.2.2 Carrier Aggregation Tests

All carrier aggregation tests are performed using the antenna connection in clause D.4A.2.4 for the PCell antenna connection if the PCell is on a band where 2RX is supported or the antenna connection in D.4A.2.5 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All carrier aggregation tests are performed using the antenna connection in clause D.4A.2.4 for the SCell antenna connection if an SCell is on band where 2RX is supported or the testing procedure in D.4A.2.5 for the SCell antenna connection if an SCell is on a band where 4RX is supported.

D.4A.2.3 EN-DC Tests

All EN-DC tests are performed using the antenna connection in clause D.4A.2.6 for the PCell antenna connection if the PCell is on a band where 2RX is supported or the antenna connection in D.4A.2.7 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All EN-DC tests are performed using the antenna connection in clause D.4A.2.4 for the PSCell or SCell antenna connection if an SCell is on band where 2RX is supported or the testing procedure in D.4A.2.5 for the SCell antenna connection if an SCell or PSCell is on a band where 4RX is supported.

D.4A.2.4 Antenna connection for bands where 2RX is supported

For bands where 2RX is supported, it is left to the UE declaration and AP configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 Rx ports shall be connected with zero input**.** No test parameters or requirements are modified.

D.4A.2.5 Antenna connection for bands where 4RX is supported

For bands where 4RX is supported, all 4 RX antennas are connected with data source from system simulator**.** The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clauses D.4A.2.1 and D.4A.2.2, no test parameters or requirements are modified.

D.4A.2.6 EN-DC LTE Antenna connection for bands where 2RX is supported

For bands where LTE 2RX is supported, it is left to the UE declaration and AP configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 Rx ports shall be connected with zero input**.** No test parameters or requirements are modified.

D.4A.2.7 EN-DC LTE Antenna connection for bands where 4RX is supported

For bands where LTE 4RX is supported, all 4 RX antennas are connected with data source from system simulator**.** The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clauses A.3.8.1.2.1 and A.3.8.1.2.2 of TS 36.133 [23], no test parameters or requirements are modified.

D.4B Antenna connection for 8Rx capable UEs

D.4B.1 Introduction

All tests in clause 4 and 6 are specified for UEs supporting 2Rx. In this clause, the antenna connection method for applying 2Rx tests or 4Rx tests to UEs supporting 8Rx antenna ports is specified. No tests are currently specified in clause 4 or 6 which are applicable only to 8Rx antenna ports, so 8Rx capable UEs are always tested by reusing tests which were originally specified for 2Rx UEs or 4Rx UEs.

D.4B.1 Principle of testing

D.4B.1.1 Single carrier tests

For 8Rx capable UEs supporting at least one band where 2Rx is supported and either 4Rx or 8Rx is not supported, all single carrier tests specified in clause 4 and 6 except those in clause 4.7 and 6.7 shall be tested on any band where 2Rx is supported and 8Rx is not supported with the antenna connection specified in clause D.4B.2.1. For single carrier tests specified in clause 4.7 or 6.7, all tests shall be tested with the antenna connection specified in clause D.4B.2.1 for bands where 2Rx is supported and 8Rx is not supported, and the antenna connection specified in clause D.4B.2.3 for bands where 8Rx is supported.

For 8Rx capable UEs supporting at least one band where 4Rx is supported and 8Rx is not supported but without supporting any band where only 2Rx is supported, all single carrier tests specified in clause 4 and 6 except those in clause 4.7 and 6.7 shall be tested on any band where 4Rx is supported and 8Rx is not supported with the antenna connection specified in clause D.4B.2.2. For single carrier tests specified in clause 4.7 or 6.7, all tests shall be tested with the antenna connection specified in clause D.4B.2.2 for bands where 4Rx is supported and 8Rx is not supported, and the antenna connection specified in D.4B.2.3 for bands where 8Rx is supported. For radio link monitoring tests, the SNR levels are modified according to Table D.4.1.1-1 and Table D.4.1.1-2. For beam failure detection and link recovery tests, the SNR levels are modified according to Table D.4.1.1-3.

For 8Rx capable UEs which do not support any band where 8Rx is not supported, all tests specified in clauses A.4 and A.6 shall be tested using the antenna connection specified in clause D.4B.2.3. For radio link monitoring tests, the SNR levels are modified according to Table D.4.1.1-1 and Table D.4.1.1-2. For beam failure detection and link recovery tests, the SNR levels are modified according to Table D.4.1.1-3.

D.4B.1.2 Carrier aggregation tests

All carrier aggregation tests are performed using the antenna connection in clause D.4B.2.1 for the PCell antenna connection if the PCell is on a band where 2Rx is supported and either 4Rx or 8Rx is not supported, or using the antenna connection in clause D.4B.2.2 for the PCell antenna connection if the PCell is on a band where 4Rx is supported and 8Rx is not supported, or using the antenna connection in D.4B.2.3 for the PCell antenna connection if the PCell is on a band where 8Rx is supported.

All carrier aggregation tests are performed using the antenna connection in clause D.4B.2.1 for the SCell antenna connection if an SCell is on band where 2Rx is supported and either 4Rx or 8Rx is not supported, or using the antenna connection in clause D.4B.2.2 for the SCell antenna connection if an SCell is on a band where 4Rx is supported and 8Rx is not supported, or using the antenna connection in clause D.4B.2.3 for the SCell antenna connection if an SCell is on a band where 8Rx is supported.

D.4B.1.3 EN-DC tests

All EN-DC tests are performed using the antenna connection in clause D.4B.2.4 for the PCell antenna connection if the PCell is on a band where 2Rx is supported and either 4Rx or 8Rx is not supported, or using the antenna connection in clause D.4B.2.5 for the PCell antenna connection if the PCell is on a band where 4Rx is supported and 8Rx is not supported, or using the antenna connection in clause D.4B.2.6 for the PCell antenna connection if the PCell is on a band where 8Rx is supported.

All EN-DC tests are performed using the antenna connection in clause D.4B.2.1 for the PSCell or SCell antenna connection if an SCell or PSCell is on band where 2Rx is supported and either 4Rx or 8Rx is not supported, or using antenna connection in clause D.4B.2.2 for the PSCell or SCell antenna connection if an SCell or PSCell is on a band where 4Rx is supported and 8Rx is not supported, or using antenna connection in D.4B.2.3 for the PSCell or SCell antenna connection if an SCell or PSCell is on a band where 8Rx is supported.

D.4B.2 Antenna connection

D.4B.2.1 Antenna connection for NR bands where 2Rx is supported

For bands where 2Rx is supported and either 4Rx or 8Rx is not supported, it is left to the UE declaration and antenna port configuration to decide which 2 of the 8 Rx ports are connected with data source from system simulator. The remaining 6 Rx ports shall be connected with zero input**.** No test parameters or requirements are modified.

D.4B.2.2 Antenna connection for NR bands where 4Rx is supported

For bands where 4Rx is supported and 8Rx is not supported, it is left to the UE declaration and antenna port configuration to decide which 4 of the 8 Rx ports are connected with data source from system simulator. The remaining 4 Rx ports shall be connected with zero input. Except for the modifications to radio link monitoring thresholds and beam failure detection thresholds described in clause D.4A.2.1, no test parameters or requirements are modified.

D.4B.2.3 Antenna connection for bands where 8Rx is supported

For bands where 8Rx is supported, all 8 Rx antennas are connected with data source from system simulator. The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clause D.4A.2.1, no test parameters or requirements are modified.

D.4B.2.4 Antenna connection for E-UTRA bands where 2Rx is supported

For E-UTRAN bands where 2Rx is supported and 4Rx or 8Rx is not supported, it is left to the UE declaration and antenna port configuration to decide which 2 of the 8 Rx ports are connected with data source from system simulator. The remaining 6 Rx ports shall be connected with zero input. No test parameters or requirements are modified.

D.4B.2.5 Antenna connection for E-UTRA bands where 4Rx is supported

For bands E-UTRAN where 4Rx is supported and 8Rx is not supported, it is left to the UE declaration and antenna port configuration to decide which 4 of the 8 Rx ports are connected with data source from system simulator. The remaining 4 Rx ports shall be connected with zero input. Except for the modifications to radio link monitoring thresholds described in TS 36.133 [23] clause A.3.8.1.2.1 and A.3.8.1.2.2, no test parameters or requirements are modified.

D.4B.2.6 Antenna connection for E-UTRA bands where 8Rx is supported

For bands E-UTRAN where 8Rx is supported, all 8 Rx antennas are connected with data source from system simulator. The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in TS 36.133 [23] clause A.3.8.1.2.1 and A.3.8.1.2.2, no test parameters or requirements are modified.

D.5 Test Cases with Different Channel Bandwidths

D.5.1 Test Cases with Different E-UTRA Channel Bandwidths

D.5.1.1 Introduction

Test cases involving E-UTRA cell(s) may be defined with different E-UTRA channel bandwidths to verify the same type of RRM requirement.

D.5.1.2 Principle of testing

If multiple test cases involving E-UTRA cell(s) are defined with different E-UTRA channel bandwidths to verify the same type of RRM requirement that is E-UTRA channel bandwidth independent, then the UE needs to be tested with only one channel bandwidth in each E-UTRA cell and with the same bandwidth in all the E-UTRA cells used in the test case.

D.6 Test Cases for Synchronous and Asynchronous DC Operations

D.6.1 EN-DC Test Cases for Synchronous and Asynchronous EN-DC Operations

D.6.1.1 Introduction

This clause defines a principle, which is applicable to test cases verifying RRM requirements for EN-DC operation in synchronous and asynchronous scenarios.

Test cases may be defined in both synchronous EN-DC and asynchronous EN-DC scenarios to verify the same type of RRM requirement.

D.6.1.2 Principle of Testing

If EN-DC test cases are defined in both synchronous and asynchronous EN-DC scenarios to verify the same type of RRM requirement then the UE capable of both synchronous and asynchronous EN-DC operations needs to be tested with one of the tests in either synchronous or asynchronous EN-DC scenarios.

D.7 CCA model

D.7.1 Introduction

The CCA model is used in some RRM test cases with at least one cell on a carrier frequency with CCA. The intention with the CCA model is to emulate in the test equipment the behaviour of a gNB or UE which performs channel measurement to check that the channel is clear prior to performing one or more downlink or uplink transmissions.

D.7.2 CCA model for operation on a carrier frequency with CCA in FR1

D.7.2.1 DL CCA model

The same DL CCA model is applicable regardless of whether DRX cycle is used or not with the following differences:

- The counter, $l_{CCA,}$ is used to monitor the number of unavailable DBT samples withing an evaluation window, $W_{CCA_DL.}$ DBT samples outside of the evaluation window W_{CCA_DL} are discarded.
- If DRX cycle is not used then prior to each DBT window, the test equipment shall determine whether the DL CCA attempt is successful (i.e., the corresponding signals have to be transmitted), based on probability P_{CCA_DL} of successful DL CCA configured in the corresponding test case. If DRX cycle is not used, then the DL CCA model shall increment the counter l_{CCA} for every unavailable DBT sample due to DL CCA failure.
- If DRX cycle is used, then the DL CCA model shall increment the counter, l_{CCA}, once per DRX cycle for a DRX cycle if the first DBT sample in that DRX cycle is unavailable due to DL CCA failure. DL CCA failures in a DRX cycle are determined as follows:
- The test system *in the first DBT window of each DRX cycle* determines whether the DL CCA attempt is successful or not using the principle as follows:
  - If the DL CCA is successful then the test system shall transmit in all DBT windows within that DRX cycle.
  - If the DL CCA is not successful then the test system shall not transmit in any of the DBT windows within that DRX cycle. In this case l_{CCA} is increased by 1.
- The parameters, L_{CCA_DL}, L_{CCA_UL}, W_{CCA_DL} and W_{CCA_UL} can be used as in non-DRX tests.

If the CCA attempt is successful for a transmission, then the test equipment shall transmit also other remaining transmissions, according to the configuration, within the same DBT window.

If the CCA attempt is not successful for a transmission within the DBT window, the test equipment shall determine whether the CCA attempt is successful for the next configured transmission, based on probability P_{CCA_DL}.

The probability can be different in different time intervals T_i during a test case. One probability value (per cell) applies at any time point during a test; one or more probability values can be configured in the entire test, one value P_{CCA_DL} per time interval T_i where $i \geq 1$, and the multiple time intervals (when $i>1$) do not overlap (e.g., $P_{CCA_DL}=1.0$ in T_1 and $P_{CCA_DL}=0.75$ in T_2).

For semi-static channel access configuration, a single value P_{CCA_DL} is used to configure the probability of CCA success in different time intervals T_i during a test realization. An additional limit L_{CCA_DL} is used to determine the maximum number of unavailable DBT samples within an evaluation window W_{CCA_DL}. If the number of unavailable DBT samples on the last W_{CCA_DL} DBT samples is larger or equal to L_{CCA_DL}, the CCA attempt is considered successful for transmission.

For dynamic channel access configuration, the parameters $P_{CCA_DL_1}$ and $P_{CCA_DL_2}$ are used to configure the probability of CCA success on the first and second SSB candidate positions, respectively, in different time intervals T_i during a test realization. An additional limit L_{CCA_DL} is used to determine the maximum number of unavailable DBT samples within an evaluation window W_{CCA_DL}. If the number of unavailable DBT samples on the last W_{CCA_DL} DBT samples is larger or equal to L_{CCA_DL}, the CCA attempt is considered successful for transmission.

For semi-static channel access configuration or for dynamic channel access configuration where one candidate SSB position is modelled, prior to each discovery burst transmission window within a time interval Ti of the test, the test equipment shall:

1 - Generate a uniform random variable *p1* from the range [0, 1] for the first candidate position.

2 - Transmit the discovery burst based on *p1* in the first candidate position. If $p1 \leq P_{CCA_DL}$, the discovery burst is transmitted at the first candidate SSB location; else if l_{CCA} is larger than or equal to $L_{CCA_DL,}$ the discovery burst is transmitted at the first candidate SSB location, otherwise the discovery burst is muted. If DRX cycle is used, then the decision whether the discover burst is muted or not is repeated for the rest of the DRX cycle.

For dynamic channel access configuration where two candidate SSB positions are modelled, prior to each discovery burst transmission window within a time interval T_i of the test, the test equipment shall:

1 - Generate a uniform random variable *p1* from the range [0, 1] for the first candidate position.

2 - Transmit the discovery burst based on *p1* in the first candidate position: if $p1 \leq P_{CCA_DL1}$, the discovery burst is transmitted at first candidate SSB location, else the test equipment shall:

a - Generate a uniform random variable *p2* from the range [0, 1] for the second candidate SSB position.

b - Transmit the discovery burst based on *p2* in the second candidate position. If $p2 \leq P_{CCA_DL2}$, the discovery burst is transmitted at the second candidate SSB location; else if l_{CCA} is larger than or equal to L_{CCA_DL}, the discovery burst is transmitted at the second candidate SSB location, otherwise the discovery burst is muted. If DRX cycle is used, then the decision whether the discover burst is muted or not is repeated for the rest of the DRX cycle.

The above steps are repeated for each discovery burst transmission window in each time interval T_i of the test. The limit L_{CCA_DL} and window W_{CCA_DL} is a configuration parameter for each test case.

In many test cases, the requirement under a test depends on the number of configured SSB transmissions which are not available during the test due to CCA failure, so the test equipment shall track how many such signal occasions are not transmitted in DL during the test period.

D.7.2.2 UL CCA model

For UL CCA, the modelling approach is based on probability P_{CCA_UL} of successful CCA. Probability P_{CCA_UL} is configured in the corresponding test case, based on a set S_{CCA_UL} of possible values including 75 % and 87% as typical values for dynamic and semi-static channel access configurations, 0% to model consistent UL CCA failures, and 100% to model no UL CCA failures.

Consistent UL CCA failures are modelled by configuring a low value for P_{CCA_UL}, e.g., P_{CCA_UL} = 0%.

In the same time interval T_i during the same test case, P_{CCA_UL} can be different from P_{CCA_DL}.

The probability can be different in different time intervals T_i during a test case. One probability value applies at any time point during a test; one or more probability values can be configured in the entire test, one value P_{CCA_UL} per time interval T_i where $I \geq 1$, and the multiple time intervals (when $I > 1$) do not overlap (e.g., $P_{CCA_UL} = 1.0$ in T_1 and $P_{CCA_UL} = 0.75$ in T_2).

T_{CCA} µs prior to each UL transmission burst in the test, the test equipment (TE) shall generate a uniform random variable p from the range [0, 1]. If $p<P_{CCA_UL}$, the TE transmits an OCNG noise pattern with an energy level X per LBT measurement BW, within the UE BW scheduled/configured for the UL transmission for at-least T_{CCA} µs. Where T_{CCA} µs is energy detection time for accessing the uplink channel as defined in section 5.1.1 of TS 37.106 [36]. Where:

- X is 10.5^{Note1} dB above the energy detection threshold defined in section 5.1.1 of TS 37.106 [36].
- T_{CCA} is the channel sensing period depending on CCA category for the next UL transmission.

The TE shall count the number of UL CCA failures, and no further UL CCA failures are modelled if the number of failures exceeds the limit L_{CCA_UL} within a window W_{CCA_UL}. For each UL CCA failure generated by the model, the TE shall monitor the corresponding UL resource for the desired UL signal and based on when and/or whether the TE received the desired UL signal, it deems the test case to pass or fail.

In many cases, the requirement under a test depends on the number of configured signal occasions which are not available during the test, so the test equipment shall track how many such signal occasions are not transmitted in UL during the test period.

Note1: Includes measurement uncertainty for OCNG noise as defined in Table F.1.1.2-1.

D.7.3 Void

D.8 Test Cases in SA and EN-DC Operations

D.8.0 General

This clause defines a principle which is applicable to test cases verifying RRM requirements in standalone (SA) or EN-DC operations. RRM test cases may be defined in SA and EN-DC operations to verify the same RRM requirement.

The normative reference for this section is TS 38.133 [6] clause A.3.13.

Editor's note: this clause may need to define further for NE-DC and NR-DC test cases, which subjects to the test cases defined in the future.

D.8.1 Principle of testing

If test cases are defined in both SA and EN-DC operations to verify the same RRM requirement then the UE capable of both SA and EN-DC operations needs to verify that RRM requirement by performing test case(s) in either SA operation or in EN-DC operation.

If test cases are defined in both SA and EN-DC operations to verify at least one common RRM requirement then the UE capable of both SA and EN-DC operations needs to verify RRM requirements by performing test case(s) in either SA operation or in EN-DC operation provided that the performed test case(s):

- verifies the largest number of RRM requirements and
- verifies at least all RRM requirements covered in the test case(s), which is not performed.

Annex E (normative): Cell configuration mapping

E.0 General

The cells used in TS 38.533 do not correspond to the cells defined in TS 38.508-1 [14] clause 4.4.2. This annex describes the mapping between the test cases in TS 38.533 and the cells defined in TS 38.508-1 [14]. The test case shall apply the RF parameters as defined in TS 38.533 according to the column heading.

NOTE: For example if the second cell in a test case is an inter-frequency cell then Cell3 from TS 38.508-1 [14] clause 4.4.2 is used with the radio parameters as defined for Cell2 in TS 38.533.

E.1 Test frequency selection

E.1.0 General

The requirements defined in this test specification comprise EN-DC and NR/5GC test cases. The test cases are defined with a single NR cell or with multiple NR cells. The multi-cell test cases can be either intra-frequency, i.e. the NR cells defined by the test are overlapping in the frequency domain, or inter-frequency, i.e. the NR cells defined by the test have different centre frequencies, separated from each other by a frequency value bigger than the respective cell bandwidths. This clause describes the general rule on how to select the test frequencies for the NR RRM test cases in this test specification.

E.1.1 E-UTRA PCell for EN-DC test cases

Unless otherwise stated, the E-UTRA PCell for EN-DC test cases shall be configured using the test frequency “Mid” as defined in TS 36.508 [25] for the corresponding E-UTRA band.

In case that the “Mid” test frequency overlaps with any of the NR test frequencies required by the test case, the E-UTRA PCell shall be shifted to an additional frequency within the E-UTRA same band. If the E-UTRA band channel bandwidth is not sufficient to allocate a non-overlapping E-UTRA PCell, the auxiliary band as defined in TS 36.521-3 [26] clause 3 shall be used.

E.1.2 Test cases with one NR cell

Unless otherwise stated, for NR test cases with one NR cell, this cell shall be configured using the test frequency “Mid” as defined in TS 38.508-1 [14] for the corresponding band under test.

E.1.3 Test cases with more than one NR cell

E.1.3.1 Intra-frequency test cases

Unless otherwise stated, multi-cell intra-frequency test cases shall be tested using the test frequency “Mid” as defined in TS 38.508-1 [14] for the corresponding NR band under test.

E.1.3.2 Inter-frequency test cases

For NR/5GC and EN-DC multi-cell inter-frequency test cases in FR1, unless otherwise stated, the serving cell shall be configured using the test frequency “Low” as defined in TS 38.508-1 [14] for the corresponding band under test. Any inter-frequency neighbour cell shall be configured using the test frequency “High” as defined in TS 38.508-1 [14] for the corresponding band under test. For the 2nd inter-frequency neighbour cell shall be configured using the test frequency “Mid” as defined in TS 38.508-1 [14] for the corresponding band under test.

For NR/5GC multi-cell inter-frequency test cases in FR2, unless otherwise stated, the serving cell (and any other neighbour cell in the same frequency carrier) shall be configured using the test frequency “Mid” as defined in TS 38.508-1 [14], clause 7.2.3.2 for the corresponding band under test. Any inter-frequency neighbour cell shall be configured using a non-overlapping test frequency adjacent to the serving cell frequency, as defined in TS 38.508-1 [14], clause 7.2.3.2.

For EN-DC multi-cell inter-frequency test cases in FR2, unless otherwise stated, the PSCell (and any other neighbour cell in the same frequency carrier) shall be configured using the test frequency “Mid” as defined in TS 38.508-1 [14] , clause 7.2.3.2 for the corresponding band under test. Any inter-frequency neighbour cell shall be configured using a non-overlapping test frequency adjacent to the PSCell frequency, as defined in TS 38.508-1 [14] , clause 7.2.3.2.

E.1.4 Carrier aggregation test cases

E.1.4.1 Inter-band carrier aggregation

For inter-band carrier aggregation test cases, each of the component carriers and their respective neighbour cells shall be configured following the same principles defined in E.1.2 and E.1.3.

E.1.4.2 Intra-band contiguous carrier aggregation

For intra-band contiguous carrier aggregation with 2 CCs in FR1, unless otherwise specified, the serving cells (and any other neighbour cell(s) in the same frequency carriers) shall be configured using the test frequency “Low” as defined in TS 38.508-1 [14], subclause 4.3.1.1.3 for the corresponding band under test (SpCC = CC1 and SCC = CC2).

For intra-band contiguous carrier aggregation with 2 CCs in FR2, unless otherwise specified, the serving cells (and any other neighbour cell(s) in the same frequency carriers) shall be configured using the test frequency “Mid” as defined in TS 38.508-1 [14], subclause 4.3.1.2.3 for the corresponding band under test (SpCC = CC1 and SCC = CC2).

E.1.4.3 Intra-band non-contiguous carrier aggregation

For intra-band non-contiguous carrier aggregation in FR1, unless otherwise specified, the test frequency selection shall be done following the maximum Wgap principle, i.e. selecting the test frequencies (of the test frequencies defined in TS 38.508-1 [14]) with the widest frequency separation within the band under test.

For intra-band non-contiguous carrier aggregation in FR2, the test frequency selection is TBD.

E.1.5 E-UTRA – NR inter RAT test cases

Unless otherwise stated, the E-UTRA serving/neighbour cell for E-UTRA – NR inter-RAT test cases shall be configured using the test frequency “Mid” as defined in TS 36.508 [25] for the corresponding E-UTRA band.

In case that the “Mid” test frequency overlaps with any of the NR test frequencies required by the test case, the E-UTRA cell shall be shifted to an additional frequency within the E-UTRA same band. If the E-UTRA band channel bandwidth is not sufficient to allocate a non-overlapping E-UTRA cell, the auxiliary band as defined in TS 36.521-3 [26] clause 3 shall be used.

E.1.6 Intra-band EN-DC test cases

E.1.6.1 Intra-band non-contiguous EN-DC

For intra-band non-contiguous EN-DC in FR1, unless otherwise specified, the test frequency selection shall be done following the maximum Wgap principle, i.e. selecting the test frequencies (of the test frequencies defined in TS 38.508-1 [14]) with the widest frequency separation within the band under test.

E.1.6.1.1 Inter frequency neighbour cell

Unless otherwise stated, any inter-frequency neighbour cell shall be configured using the test frequency “Mid” as defined in TS 38.508-1 [14] for the corresponding NR band under test. If the NR band channel bandwidth is not sufficient to allocate a non-overlapping the neighbour cell, the auxiliary band as defined in TBD shall be used.

E.1.6.2 Intra-band contiguous EN-DC

E.1.6.1.1 E-UTRA PCell

Unless otherwise stated, the E-UTRA PCell for intra-band contiguous EN-DC test cases shall be configured using same test frequency, e.g., “Mid” as for NR PSCell as defined in TS 38.508-1 [14].

E.1.7 NR sidelink test cases

Unless otherwise stated, for NR sidelink test cases the NR sidelink carrier shall be configured using the test frequency "Mid" as defined in TS 38.508-1 [14] for the corresponding band under test.

For con-current operation, unless otherwise stated, each of the NR Uu carriers and their respective cells shall be configured following the sample principles defined in E.1.2 and E.1.3.

E.2 Cell configuration mapping for EN-DC FR1 test cases in Chapter 4

Table E.2-1 defines the cell configuration mapping for EN-DC FR1 test cases in chapter 4 of this test specification.

Table E.2-1: Cell configuration mapping for EN-DC FR1 RRM testing

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 Cell3	38.533 NR Cell4	CA Type
4.3.2.2.1	EN-DC FR1 contention based random access	LTE Cell 1	NR Cell 1			
4.3.2.2.2	EN-DC FR1 non-contention based random access	LTE Cell 1	NR Cell 1			
4.3.2.2.3	EN-DC FR1 2-step contention based random access	LTE Cell 1	NR Cell 1			
4.3.2.2.4	EN-DC FR1 2-step non-contention based random access	LTE Cell 1	NR Cell 1			
4.4.1.1	EN-DC FR1 UE transmit timing accuracy	LTE Cell 1	NR Cell 1			
4.4.3.1	EN-DC FR1 timing advance adjustment accuracy	LTE Cell 1	NR Cell 1			
4.5.1.1	EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	LTE Cell 1	NR Cell 1			
4.5.1.2	EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	LTE Cell 1	NR Cell 1			
4.5.1.3	EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode	LTE Cell 1	NR Cell 1			
4.5.1.4	EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode	LTE Cell 1	NR Cell 1			
4.5.1.5	EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	LTE Cell 1	NR Cell 1			
4.5.1.6	EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	LTE Cell 1	NR Cell 1			
4.5.1.7	EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	LTE Cell 1	NR Cell 1			
4.5.1.8	EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	LTE Cell 1	NR Cell 1			
4.5.1.9	EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion	LTE Cell 1	NR Cell 1			
4.5.2.1	EN-DC FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC	LTE Cell 1	NR Cell 1			
4.5.2.2	EN-DC FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC	LTE Cell 1	NR Cell 1			
4.5.2.3		LTE Cell 1	NR Cell 1	NR Cell 6		intra-band

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 Cell3	38.533 NR Cell4	CA Type
	EN-DC FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC			NR Cell 10		inter-band
4.5.2.4	EN-DC FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
				NR Cell 10		inter-band
4.5.2.5	EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC	LTE Cell 6	NR Cell 1	LTE Cell 3		
4.5.2.6	EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC	LTE Cell 6	NR Cell 1	LTE Cell 3		
4.5.2.8	EN-DC FR1 interruptions at NR SRS carrier based switching in asynchronous EN-DC	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
				NR Cell 10		inter-band
4.5.2.9	EN-DC FR1 interruptions at E-UTRA SRS carrier based switching	LTE Cell 6	NR Cell 1	LTE Cell 3		
4.5.2.10	EN-DC FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell	LTE Cell 1	NR Cell 1			
4.5.3.1	EN-DC FR1 SCell activation and deactivation of known SCell in non-DRX for 160ms SCell measurement cycle	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
				NR Cell 10		inter-band
4.5.3.2	EN-DC FR1 SCell activation and deactivation of known SCell in non-DRX for 640ms SCell measurement cycle	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
				NR Cell 10		inter-band
4.5.3.3	EN-DC FR1 SCell activation and deactivation of unknown SCell in non-DRX	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
				NR Cell 10		inter-band
4.5.3.5	EN-DC FR1 direct SCell activation at SCell addition of known SCell	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
				NR Cell 10		inter-band
4.5.3.6	EN-DC FR1 fast SCell Activation of known SCell in non-DRX for 160ms SCell measurement cycle	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
				NR Cell 10		inter-band
4.5.3.7	EN-DC FR1 fast SCell Activation of known SCell for 640 ms SCell measurement cycle	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
4.5.3.11	EN-DC FR1 TRS-based SCell Activation of SSB-less SCell in FR1 collocated inter-band in non-DRX	LTE Cell 1	NR Cell 1	NR Cell 10		inter-band
4.5.3.12	EN-DC FR1 Inter-band SSB-less SCell activation using A-TRS	LTE Cell 1	NR Cell 1	NR Cell 10		inter-band
4.5.4.1	EN-DC FR1 UE UL carrier RRC reconfiguration delay	LTE Cell 1	NR Cell 1	NR Cell 33		
4.5.5.1	EN-DC FR1 SSB-based beam failure detection and link recovery in non-DRX	LTE Cell 1	NR Cell 1			
4.5.5.2	EN-DC FR1 SSB-based beam failure detection and link recovery in DRX	LTE Cell 1	NR Cell 1			
4.5.5.3	EN-DC FR1 CSI-RS-based beam failure detection and link recovery in non-DRX	LTE Cell 1	NR Cell 1			
4.5.5.4	EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX	LTE Cell 1	NR Cell 1			
4.5.5.5	EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX	LTE Cell 1	NR Cell 1			
4.5.5.6	EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in DRX	LTE Cell 1	NR Cell 1			
4.5.5.7	EN-DC FR1 PSCell TRP specific SSB-based beam failure detection and link recovery in non-DRX	LTE Cell 1	NR Cell 1			
4.5.5.8	EN-DC FR1 SCell TRP specific CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX	LTE Cell 1	NR Cell 1	NR Cell 6		
4.5.6.1.1	EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC	LTE Cell 1	NR Cell 1			

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 Cell3	38.533 NR Cell4	CA Type
4.5.6.1.2	EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC	LTE Cell 1	NR Cell 6	NR Cell 3		
4.5.6.2.1	EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC	LTE Cell 1	NR Cell 1			
4.5.6.3.1	Simultaneous E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in EN-DC on multiple CCs	LTE Cell 1	NR Cell 1	NR Cell 6		
4.5.6.5.1	E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC on multiple CCs	LTE Cell 1	NR Cell 1	NR Cell 6		
4.5.7.1	EN-DC FR1 addition and release delay of known PSCell	LTE Cell 1	NR Cell 1			
4.5.8.1	EN-DC FR1 interruptions at switching between two uplink carriers	LTE Cell 1	NR Cell 1			
4.5.9.1	UE specific CBW change on FR1 NR PSCell with non-DRX in synchronous EN- DC	LTE Cell 1	NR Cell 1			
4.5.10.1	EN-DC FR1 PSCell activation and deactivation delay	LTE Cell 1	NR Cell 1			
4.5.11.1	EN-DC FR1 Addition and Release Delay of PSCell	LTE Cell 1	NR Cell 1			
4.6.1.1	EN-DC FR1 event-triggered reporting without gap in non-DRX	LTE Cell 1	NR Cell 1	NR Cell 2		
4.6.1.2	EN-DC FR1 event-triggered reporting without gap in DRX	LTE Cell 1	NR Cell 1	NR Cell 2		
4.6.1.3	EN-DC FR1 event-triggered reporting with gap in non-DRX	LTE Cell 1	NR Cell 1	NR Cell 2		
4.6.1.4	EN-DC FR1 event-triggered reporting with gap in DRX	LTE Cell 1	NR Cell 1	NR Cell 2		
4.6.1.5	EN-DC FR1 event-triggered reporting without gap in non-DRX with SSB time index detection	LTE Cell 1	NR Cell 1	NR Cell 2		
4.6.1.6	EN-DC FR1 event-triggered reporting with gap in non-DRX with SSB time index detection	LTE Cell 1	NR Cell 1	NR Cell 2		
4.6.1.7	EN-DC FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16	LTE Cell 1	NR Cell 1	NR Cell 2		
4.6.1.8	EN-DC FR1 event triggered reporting cell without SSB time index detection in DRX for UE configured with highSpeedMeasCA-Scell-r17	LTE Cell 1	NR Cell 1	NR Cell 6	NR Cell 13	Intra-band
				NR Cell 10	NR Cell 30	Inter-band
4.6.2.1	EN-DC FR1-FR1 event-triggered reporting in non-DRX	LTE Cell 1	NR Cell 6	NR Cell 3		
4.6.2.2	EN-DC FR1-FR1 event-triggered reporting in DRX	LTE Cell 1	NR Cell 6	NR Cell 3		
4.6.2.5	EN-DC FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection	LTE Cell 1	NR Cell 6	NR Cell 3		
4.6.2.6	EN-DC FR1-FR1 event-triggered reporting in DRX with SSB time index detection	LTE Cell 1	NR Cell 6	NR Cell 3		
4.6.2.9	EN-DC FR1-FR1 event triggered reporting without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17	LTE Cell 1	NR Cell 6	NR Cell 3		
4.6.4.1	EN-DC FR1 SSB-based L1-RSRP measurement in non-DRX	LTE Cell 1	NR Cell 1			
4.6.4.2	EN-DC FR1 SSB-based L1-RSRP measurement in DRX	LTE Cell 1	NR Cell 1			
4.6.4.3	EN-DC FR1 CSI-RS-based L1-RSRP measurement in non-DRX	LTE Cell 1	NR Cell 1			
4.6.4.4	EN-DC FR1 CSI-RS-based L1-RSRP measurement in DRX	LTE Cell 1	NR Cell 1			
4.6.5.1	EN-DC FR1 SRS-RSRP measurement with non-DRX	LTE Cell 1	NR Cell 1			

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 Cell3	38.533 NR Cell4	CA Type
4.6.7.1	EN-DC FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in non-DRX	LTE Cell 1	NR Cell 1			
4.6.7.2	EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR measurement in DRX	LTE Cell 1	NR Cell 1			
4.6.7.3	EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX	LTE Cell 1	NR Cell 1			
4.7.1.1.1	EN-DC FR1 SS-RSRP absolute measurement accuracy	LTE Cell 1	NR Cell 489	NR Cell 1		
4.7.1.1.2	EN-DC FR1 SS-RSRP relative measurement accuracy	LTE Cell 1	NR Cell 489	NR Cell 1		
4.7.1.2.1	EN-DC FR1-FR1 SS-RSRP absolute measurement accuracy	LTE Cell 1	NR Cell 6	NR Cell 3		
4.7.1.2.2	EN-DC FR1-FR1 SS-RSRP relative measurement accuracy	LTE Cell 1	NR Cell 6	NR Cell 3		
4.7.2.1	EN-DC FR1 SS-RSRQ measurement accuracy	LTE Cell 1	NR Cell 1	NR Cell 2		
4.7.2.2.1	EN-DC FR1-FR1 SS-RSRQ absolute measurement accuracy	LTE Cell 1	NR Cell 6	NR Cell 3		
4.7.2.2.2	EN-DC FR1-FR1 SS-RSRQ relative measurement accuracy	LTE Cell 1	NR Cell 6	NR Cell 3		
4.7.3.1	EN-DC FR1 SS-SINR measurement accuracy	LTE Cell 1	NR Cell 1	NR Cell 2		
4.7.3.2.1	EN-DC FR1-FR1 SS-SINR absolute measurement accuracy	LTE Cell 1	NR Cell 6	NR Cell 3		
4.7.3.2.2	EN-DC FR1-FR1 SS-SINR relative measurement accuracy	LTE Cell 1	NR Cell 6	NR Cell 3		
4.7.4.1.1	EN-DC FR1 SSB based L1-RSRP absolute measurement accuracy	LTE Cell 1	NR Cell 1			
4.7.4.1.2	EN-DC FR1 SSB based L1-RSRP relative measurement accuracy	LTE Cell 1	NR Cell 1			
4.7.4.2.1	EN-DC FR1 CSI-RS based L1-RSRP absolute measurement accuracy	LTE Cell 1	NR Cell 1			
4.7.4.2.2	EN-DC FR1 CSI-RS based L1-RSRP relative measurement accuracy	LTE Cell 1	NR Cell 1			
4.7.5.1	EN-DC FR1 SFTD measurement accuracy	LTE Cell 1	NR Cell 1			
4.7.6.1	EN-DC SRS-RSRP measurement accuracy with FR1 serving cell	LTE Cell 1	NR Cell 1			
4.7.7.1	EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	LTE Cell 1	NR Cell 1			
4.7.7.2	EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy	LTE Cell 1	NR Cell 1			
4.7.7.3	EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	LTE Cell 1	NR Cell 1			
4.7.8.1.1	EN-DC intra-frequency absolute measurement accuracy with FR1 serving cell and FR1 target cell	LTE Cell 1	NR Cell 489	NR Cell 1		
4.7.8.1.2	EN-DC intra-frequency relative measurement accuracy with FR1 serving cell and FR1 target cell	LTE Cell 1	NR Cell 489	NR Cell 1		
4.7.8.2.1	EN-DC inter-frequency absolute measurement accuracy with FR1 serving cell and FR1 target cell	LTE Cell 1	NR Cell 6	NR Cell 3		
4.7.8.2.2	EN-DC inter-frequency relative measurement accuracy with FR1 serving cell and FR1 target cell	LTE Cell 1	NR Cell 6	NR Cell 3		
NOTE 1: Intra-frequency cells are selected such that serving and neighbour cells satisfy $(PCI_{neighbor} - PCI_{serving})\ mod\ 3 \neq 0$.						

E.3 Cell configuration mapping for EN-DC FR2 test cases in Chapter 5

Table E.3-1 defines the cell configuration mapping for EN-DC FR2 test cases in chapter 5 of this test specification.

Table E.3-1: Cell configuration mapping for EN-DC FR2 RRM testing

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 Cell3	38.533 NR Cell4	CA Type
5.3.2.2.1	EN-DC FR2 contention based random access	LTE Cell 1	NR Cell 1			
5.3.2.2.2	EN-DC FR2 non-contention based random access	LTE Cell 1	NR Cell 1			
5.3.2.2.3	EN-DC FR2 2-step contention based random access	LTE Cell 1	NR Cell 1			
5.3.2.2.4	EN-DC FR2 2-step non-contention based random access	LTE Cell 1	NR Cell 1			
5.4.1.1	EN-DC FR2 UE transmit timing accuracy	LTE Cell 1	NR Cell 1			
5.4.3.1	EN-DC FR2 timing advance adjustment accuracy	LTE Cell 1	NR Cell 1			
5.5.1.1	EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	LTE Cell 1	NR Cell 6			
5.5.1.2	EN-DC FR2 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	LTE Cell 1	NR Cell 6			
5.5.1.3	EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode	LTE Cell 1	NR Cell 6			
5.5.1.4	EN-DC FR2 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode	LTE Cell 1	NR Cell 6			
5.5.1.5	EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	LTE Cell 1	NR Cell 1			
5.5.1.6	EN-DC FR2 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	LTE Cell 1	NR Cell 1			
5.5.1.7	EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	LTE Cell 1	NR Cell 1			
5.5.1.8	EN-DC FR2 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	LTE Cell 1	NR Cell 1			
5.5.1.9	EN-DC FR2 radio link monitoring UE scheduling restrictions	LTE Cell 1	NR Cell 1			
5.5.1.10	EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion	LTE Cell 1	NR Cell 1			
5.5.2.1	EN-DC FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC	LTE Cell 1	NR Cell 1			
5.5.2.2	EN-DC FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC	LTE Cell 1	NR Cell 1			
5.5.2.3	EN-DC FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
				NR Cell 10		inter-band
5.5.2.4	EN-DC FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
				NR Cell 10		inter-band
5.5.2.5	EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC	LTE Cell 6	NR Cell 1	LTE Cell 3		

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 Cell3	38.533 NR Cell4	CA Type
5.5.2.6	EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC	LTE Cell 6	NR Cell 1	LTE Cell 3		
5.5.2.7	EN-DC FR2 interruptions at E-UTRA SRS carrier based switching	LTE Cell 1	NR Cell 1	LTE Cell 3		
5.5.2.8	EN-DC FR2 interruptions at NR SRS carrier based switching	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
				NR Cell 10		inter-band
5.5.3.1	EN-DC FR2 SCell activation and deactivation intra-band in non-DRX	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
5.5.3.7	EN-DC FR2 direct SCell activation at SCell addition of known SCell	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
5.5.3.8	EN-DC FR2 fast SCell Activation of SCell in FR2 intra-band	LTE Cell 1	NR Cell 1	NR Cell 6		intra-band
5.5.5.1	EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX	LTE Cell 1	NR Cell 1			
5.5.5.2	EN-DC FR2 SSB-based beam failure detection and link recovery in DRX	LTE Cell 1	NR Cell 1			
5.5.5.3	EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX	LTE Cell 1	NR Cell 1			
5.5.5.4	EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX	LTE Cell 1	NR Cell 1			
5.5.5.5	EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX	LTE Cell 1	NR Cell 1			
5.5.5.6	EN-DC FR2 SCell CSI-RS-based beam failure detection and link recovery in non-DRX	LTE Cell 1	NR Cell 1	NR Cell 6		
5.5.5.7	EN-DC FR2 SCell CSI-RS-based beam failure detection and link recovery in DRX	LTE Cell 1	NR Cell 1	NR Cell 6		
5.5.5.8	EN-DC FR2 PSCell CSI-RS-based TRP specific Beam Failure Detection and Link Recovery in DRX mode	LTE Cell 1	NR Cell 1			
5.5.5.9	EN-DC FR2 SSB-based beam failure detection and link recovery in DRX mode for UE fulfilling relaxed measurement criterion	LTE Cell 1	NR Cell 1			
5.5.6.2.1	EN-DC FR2 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC	LTE Cell 1	NR Cell 1			
5.5.6.3.1	E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs in synchronous EN-DC	LTE Cell 1	NR Cell 1	NR Cell 2		
5.5.6.4.1	E-UTRAN – NR FR2 PSCell SCell dormancy switch of single FR2 SCell inside active time	LTE Cell 1	NR Cell 1	NR Cell 2		
5.5.7.1	Addition and Release Delay of NR PSCell	LTE Cell 1	NR Cell 1			
5.5.8.1	EN-DC FR2 MAC-CE based active TCI state switch	LTE Cell 1	NR Cell 1			
5.5.8.2	EN-DC FR2 RRC based active TCI state switch	LTE Cell 1	NR Cell 1			
5.5.9.1.1	EN-DC PSCell FR2 uplink spatial relation switch for a known spatial relation	LTE Cell 1	NR Cell 1			
5.5.9.2.1	EN-DC PSCell FR2 uplink spatial relation switch associated with a known DL-RS	LTE Cell 1	NR Cell 1			
5.5.11.1	EN-DC FR2 MAC-CE based active joint TCI state switch	LTE Cell 1	NR Cell 1			
5.5.11.2	EN-DC FR2 MAC-CE based active uplink TCI state switch	LTE Cell 1	NR Cell 1			
5.5.11.3	EN-DC FR2 MAC-CE based active downlink TCI state switch	LTE Cell 1	NR Cell 1	NR Cell 6		
5.5.12.1	EN-DC FR2 PSCell activation and deactivation delay	LTE Cell 1	NR Cell 1			
5.5.13.1	EN-DC FR2 Addition and Release Delay of NR PSCell	LTE Cell 1	NR Cell 1			
5.6.1.1	EN-DC FR2 event-triggered reporting without gap in non-DRX	LTE Cell 1	NR Cell 1	NR Cell 2		

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 Cell3	38.533 NR Cell4	CA Type
5.6.1.2	EN-DC FR2 event-triggered reporting without gap in DRX	LTE Cell 1	NR Cell 1	NR Cell 2		
5.6.1.3	EN-DC FR2 event-triggered reporting with gap in non-DRX	LTE Cell 1	NR Cell 1	NR Cell 2		
5.6.1.4	EN-DC FR2 event-triggered reporting with gap in DRX	LTE Cell 1	NR Cell 1	NR Cell 2		
5.6.2.1	EN-DC FR2-FR2 event-triggered reporting in non-DRX	LTE Cell 1	NR Cell 6	NR Cell 3		
5.6.2.2	EN-DC FR2-FR2 event-triggered reporting in DRX	LTE Cell 1	NR Cell 6	NR Cell 3		
5.6.2.3	EN-DC FR2-FR2 event-triggered reporting in non-DRX with SSB time index detection	LTE Cell 1	NR Cell 6	NR Cell 3		
5.6.2.4	EN-DC FR2-FR2 event-triggered reporting in DRX with SSB time index detection	LTE Cell 1	NR Cell 6	NR Cell 3		
5.6.2.5	EN-DC FR1-FR2 event-triggered reporting in non-DRX	LTE Cell 1	NR Cell 6	NR Cell 3		
5.6.2.6	EN-DC FR1-FR2 event-triggered reporting in DRX	LTE Cell 1	NR Cell 6	NR Cell 3		
5.6.2.7	EN-DC FR1-FR2 event-triggered reporting in non-DRX with SSB time index detection	LTE Cell 1	NR Cell 6	NR Cell 3		
5.6.2.8	EN-DC FR1-FR2 event-triggered reporting in DRX with SSB time index detection	LTE Cell 1	NR Cell 6	NR Cell 3		
5.6.3.1	EN-DC FR2 SSB-based L1-RSRP measurement in non-DRX	LTE Cell 1	NR Cell 1			
5.6.3.2	EN-DC FR2 SSB-based L1-RSRP measurement in DRX	LTE Cell 1	NR Cell 1			
5.6.3.3	EN-DC FR2 CSI-RS-based L1-RSRP measurement in non-DRX	LTE Cell 1	NR Cell 1			
5.6.3.4	EN-DC FR2 CSI-RS-based L1-RSRP measurement in DRX	LTE Cell 1	NR Cell 1			
5.6.6.1	EN-DC FR2 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX	LTE Cell 1	NR Cell 1			
5.6.6.2	EN-DC FR2 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX	LTE Cell 1	NR Cell 1			
5.6.6.3	EN-DC FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX	LTE Cell 1	NR Cell 1			
5.6.7.1	EN-DC event triggered reporting test without gap under non-DRX	LTE Cell 1	NR Cell 1	NR Cell 2		
5.6.8.1	EN-DC event triggered reporting tests for NR FR2 cell when DRX is used	LTE Cell 1	NR Cell 6	NR Cell 3		
5.7.1.1	EN-DC FR2 SS-RSRP measurement accuracy	LTE Cell 1	NR Cell 489	NR Cell 1		
5.7.1.2	EN-DC FR2-FR2 SS-RSRP measurement accuracy	LTE Cell 1	NR Cell 6	NR Cell 3		
5.7.1.3	EN-DC FR1-FR2 SS-RSRP measurement accuracy	LTE Cell 1	NR Cell 6	NR Cell 3		
5.7.2.1	EN-DC FR2 SS-RSRQ measurement accuracy	LTE Cell 1	NR Cell 1	NR Cell 2		
5.7.2.2	EN-DC FR2-FR2 SS-RSRQ measurement accuracy	LTE Cell 1	NR Cell 6	NR Cell 3		
5.7.3.1	EN-DC FR2 SS-SINR measurement accuracy	LTE Cell 1	NR Cell 1	NR Cell 2		
5.7.3.2	EN-DC FR2-FR2 SS-SINR measurement accuracy	LTE Cell 1	NR Cell 6	NR Cell 3		
5.7.6.1	EN-DC FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	LTE Cell 1	NR Cell 1			
5.7.6.2	EN-DC FR2 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy	LTE Cell 1	NR Cell 1			

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 Cell3	38.533 NR Cell4	CA Type
5.7.6.3	EN-DC FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	LTE Cell 1	NR Cell 1			
5.7.7.1	EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	LTE Cell 1	NR Cell 489	NR Cell 1		
5.7.7.2	EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	LTE Cell 1	NR Cell 6	NR Cell 3		

E.4 Cell configuration mapping for SA FR1 test cases in Chapter 6

Table E.4-1 defines the cell configuration mapping for NR/5GC FR1 test cases in chapter 6 of this test specification.

Table E.4-1: Cell configuration mapping for SA FR1 RRM testing

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
6.1.1.1	NR SA FR1 cell re-selection	NR Cell 1	NR Cell 11			
6.1.1.2	NR SA FR1-FR1 cell re-selection	NR Cell 6	NR Cell 23			
6.1.1.3	NR SA FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	NR Cell 1	NR Cell 11			
6.1.1.4	NR SA FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	NR Cell 1	NR Cell 11			
6.1.1.5	NR SA FR1-FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	NR Cell 6	NR Cell 23			
6.1.1.6	NR SA FR1-FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	NR Cell 6	NR Cell 23			
6.1.1.7	NR SA FR1 cell re-selection for UE configured with highSpeedMeasFlag-r16	NR Cell 1	NR Cell 11			
6.1.1.8	NR SA FR1-FR1 Cell reselection for UE configured with highSpeedMeasInterFreq-r17	NR Cell 1	NR Cell 11			
6.1.1.9	NR SA FR1 cell re-selection for UE operating on a cell with less than 5MHz BW	NR Cell 1	NR Cell 11			
6.2.1	NR SA FR1 TA Validation for CG-SDT	NR Cell 1				
6.3.1.1	NR SA FR1 handover with known target cell	NR Cell 1	NR Cell 2			
6.3.1.2	NR SA FR1 handover with unknown target cell	NR Cell 1	NR Cell 2			
6.3.1.3	NR SA FR1-FR1 Handover with unknown Target Cell	NR Cell 6	NR Cell 3			
6.3.1.7	NR SA FR1 synchronous DAPS handover	NR Cell 1	NR Cell 2			
6.3.1.8	NR SA FR1 asynchronous DAPS handover	NR Cell 1	NR Cell 2			
6.3.1.9	NR SA FR1 Intra-band inter-frequency synchronous DAPS handover	NR Cell 6	NR Cell 3			
6.3.1.10	NR SA FR1 Intra-band inter-frequency asynchronous DAPS handover	NR Cell 6	NR Cell 3			
6.3.1.11	NR SA FR1 Inter-band inter-frequency synchronous DAPS handover	NR Cell 1	NR Cell 10			
6.3.1.12	NR SA FR1 Inter-band inter-frequency asynchronous DAPS handover	NR Cell 1	NR Cell 10			
6.3.1.18	NR SA FR1 handover with unknown target cell operating with 12 PRB SSB bandwidth	NR Cell 6	NR Cell 23			
6.3.2.1.1	NR SA FR1 RRC re-establishment	NR Cell 1	NR Cell 2			
6.3.2.1.2	NR SA FR1 - FR1 RRC re-establishment	NR Cell 6	NR Cell 3			
6.3.2.1.3	NR SA FR1 RRC re-establishment without serving cell timing	NR Cell 1	NR Cell 2			

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
6.3.2.2.1	NR SA FR1 contention based random access	NR Cell 1				
6.3.2.2.2	NR SA FR1 non-contention based random access	NR Cell 1				
6.3.2.2.3	NR SA FR1 2-step contention based random access	NR Cell 1				
6.3.2.2.4	NR SA FR1 2-step non-contention based random access	NR Cell 1				
6.3.2.3.1	NR SA FR1 RRC connection release with redirection	NR Cell 6	NR Cell 23			
6.3.2.4.1	PDCCH-order RACH on neighbor cell in FR1 when RACH BW is within active UL BWP	NR Cell 1	NR Cell 2			
6.3.2.4.2	PDCCH-ordered RACH to an inter-frequency candidate cell in FR1 for LTM	NR Cell 6	NR Cell 3			
6.3.2.4.3	PDCCH-order RACH on neighbor cell without L1-RSRP measurement in FR1 when RACH BW is within active UL BWP	NR Cell 1	NR Cell 2			
6.3.3.1	NR SA FR1 conditional handover	NR Cell 1	NR Cell 2			
6.3.3.2	NR SA FR1-FR1 conditional handover	NR Cell 1	NR Cell 6			
6.3.3.3	SA FR1 conditional handover including target MCG and target SCG	NR Cell 1	NR Cell 3	NR Cell 2	NR Cell 12	
6.3.3.4	NR-SA FR1 conditional handover including target MCG and candidate SCG	NR Cell 1	NR Cell 3	NR Cell 2	NR Cell 12	
6.3.3.6	NR SA FR1 Intra-frequency NES triggering conditional handover	NR Cell 1	NR Cell 2			
6.3.3.7	NR SA FR1 Inter-frequency NES-based conditional handover	NR Cell 1	NR Cell 6			
6.3.4.1	RACH-based Intra-frequency PCell switch from FR1 to FR1	NR Cell 1	NR Cell 2			
6.3.4.2	RACH based Inter-frequency LTM PCell switch from FR1 to FR1	NR Cell 6	NR Cell 3			
6.3.4.3	RACH-less Intra-frequency PCell switch from FR1 to FR1	NR Cell 1	NR Cell 2			
6.3.4.4	NR SA FR1 RACH-less Intra-frequency PCell switch from FR1 to FR1 without L1-RSRP measurement	NR Cell 1	NR Cell 2			
6.3.5.1	NR SA FR1 RACH-based intra-frequency LTM PSCell switch from FR1 to FR1	NR Cell 1	NR Cell 6	NR Cell 2		
6.4.3.1	NR SA FR1 timing advance adjustment accuracy	NR Cell 1				
6.5.1.1	NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode	NR Cell 1				
6.5.1.2	NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode	NR Cell 1				
6.5.1.3	NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode	NR Cell 1				
6.5.1.4	NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in DRX mode	NR Cell 1				
6.5.1.5	NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode	NR Cell 1				
6.5.1.6	NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode	NR Cell 1				
6.5.1.7	NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode	NR Cell 1				
6.5.1.8	NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode	NR Cell 1				

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
6.5.1.9	SA FR1 radio link monitoring out-of-sync Test for PSCell configured with CSI-RS-based RLM for UE fulfilling relaxed measurement criterion	NR Cell 1				
6.5.1.13	NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode for UE operating on a cell with less than 5MHz BW	NR Cell 1				
6.5.1.14	NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode for UE operating on a cell with less than 5MHz BW	NR Cell 1				
6.5.1.16	NR SA FR1 Radio Link Monitoring In-sync Test for PCell with 3MHz Channel Bandwidth configured with SSB-based RLM RS in DRX mode	NR Cell 1				
6.5.2.1	NR SA FR1 interruptions during measurements on deactivated NR SCC	NR Cell 1	NR Cell 6			intra-band
			NR Cell 10			inter-band
6.5.2.2	SA FR1 interruptions at NR SRS carrier based switching	NR Cell 1	NR Cell 6			intra-band
			NR Cell 10			inter-band
6.5.3.1	NR SA FR1 SCell activation and deactivation of known SCell in non-DRX for 160ms SCell measurement cycle	NR Cell 1	NR Cell 6			intra-band
			NR Cell 10			inter-band
6.5.3.2	NR SA FR1 SCell activation and deactivation of known SCell in non-DRX for 640ms SCell measurement cycle	NR Cell 1	NR Cell 6			intra-band
			NR Cell 10			inter-band
6.5.3.3	NR SA FR1 SCell activation and deactivation of unknown SCell in non-DRX	NR Cell 1	NR Cell 6			intra-band
			NR Cell 10			inter-band
6.5.3.4	NR SA FR1 direct SCell activation at SCell addition of known SCell	NR Cell 1	NR Cell 6			intra-band
6.5.3.5	NR SA FR1 direct SCell activation at handover with known SCell	NR Cell 1	NR Cell 6	NR Cell 2		intra-band
			NR Cell 10			inter-band
6.5.3.10	NR SA FR1 fast SCell Activation of known SCell in non-DRX for 160ms SCell measurement cycle	NR Cell 1	NR Cell 6			intra-band
			NR Cell 10			inter-band
6.5.3.11	NR SA FR1 fast SCell Activation of known SCell in non-DRX for 640ms SCell measurement cycle	NR Cell 1	NR Cell 6			intra-band
			NR Cell 10			inter-band
6.5.3.15	NR SA FR1 TRS based SCell Activation of SSB-less SCell in inter-band CA in non-DRX	NR Cell 1	NR Cell 10			Inter-band
6.5.3.16	NR SA FR1 Inter-band SSB-less SCell Activation based on A-TRS in non-DRX	NR Cell 1	NR Cell 10			Inter-band
6.5.4.1	NR SA FR1 UE UL carrier RRC reconfiguration delay	NR Cell 1	NR Cell 33			
6.5.5.1	NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX	NR Cell 1				
6.5.5.2	NR SA FR1 SSB-based beam failure detection and link recovery in DRX	NR Cell 1				
6.5.5.3	NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX	NR Cell 1				
6.5.5.4	NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX	NR Cell 1				
6.5.5.5	NR SA FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX	NR Cell 1	NR Cell 10			
6.5.5.6	NR SA FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in DRX	NR Cell 1	NR Cell 10			
6.5.5.7	NR SA FR1 PCell TRP Specific CSI-RS-based Beam Failure Detection and Link Recovery in DRX	NR Cell 1				

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
6.5.6.1.1	NR SA FR1-FR1 DCI-based DL active BWP switch in non-DRX	NR Cell 1	NR Cell 6			intra-band
			NR Cell 10			inter-band
6.5.6.1.2	NR SA FR1 DCI-based DL active BWP switch in non-DRX	NR Cell 1				
6.5.6.2.1	NR SA FR1 RRC-based DL active BWP switch in non-DRX	NR Cell 1				
6.5.6.3.1	NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA	NR Cell 1	NR Cell 6	NR Cell 3		
6.5.6.5.1	RRC based BWP switch on multiple CCs	NR Cell 1	NR Cell 6			
6.5.7.1	NR SA FR1 DL Interruptions at switching between two uplink carriers in FDD-TDD CA	NR Cell 1	NR Cell 10			inter-band
6.5.7.2	NR SA FR1 DL Interruptions at switching between two uplink carriers in TDD-TDD CA	NR Cell 1	NR Cell 10			inter-band
6.5.7A.1	NR SA FR1 DL interruptions at switching between two uplink carriers in FDD-TDD CA	NR Cell 1	NR Cell 10			inter-band
6.5.7A.2	NR SA FR1 DL interruptions at switching between two uplink carriers in TDD-TDD CA	NR Cell 1	NR Cell 10			inter-band
6.5.7B.1	NR SA FR1 DL Interruptions at switching between two uplink bands in FDD-TDD CA	NR Cell 1	NR Cell 10	NR Cell 31		inter-band
6.5.7B.2	NR SA FR1 DL Interruptions at switching between two uplink bands in TDD-TDD CA	NR Cell 1	NR Cell 10	NR Cell 31		inter-band
6.5.7C.1	DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA	NR Cell 1	NR Cell 10	NR Cell 31		Inter-band
6.5.7C.2	DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA	NR Cell 1	NR Cell 10	NR Cell 31		Inter-band
6.5.7D.1	NR SA FR1 DL interruptions at switching across three uplink bands in TDD-TDD CA for single TAG	NR Cell 1	NR Cell 10	NR Cell 500		Inter-band
6.5.7D.2	NR SA FR1 DL interruptions at switching across four uplink bands in FDD-TDD CA for single TAG	NR Cell 1	NR Cell 10	NR Cell 28	NR Cell 500	Inter-band
6.5.7D.3	NR SA FR1 DL interruptions at switching across three uplink bands in FDD-TDD CA for two TAGs	NR Cell 1	NR Cell 10	NR Cell 500		Inter-band
6.5.7D.4	NR SA FR1 DL interruptions at switching across four uplink bands in TDD-TDD CA for two TAGs	NR Cell 1	NR Cell 10	NR Cell 28	NR Cell 500	Inter-band
6.5.8.1	UE specific CBW change on PCell in FR1 in non-DRX	NR Cell 1				
6.6.1.1	SA event triggered reporting tests without gap under non-DRX	NR Cell 1	NR Cell 2			
6.6.1.2	SA event triggered reporting tests without gap under DRX	NR Cell 1	NR Cell 2			
6.6.1.3	SA event triggered reporting tests with per-UE gaps under non-DRX	NR Cell 1	NR Cell 2			
6.6.1.4	SA event triggered reporting tests with per-UE gaps under DRX	NR Cell 1	NR Cell 2			
6.6.1.5	SA event triggered reporting tests without gap under non-DRX with SSB index reading	NR Cell 1	NR Cell 2			
6.6.1.6	SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading	NR Cell 1	NR Cell 2			
6.6.1.7	NR SA FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16	NR Cell 1	NR Cell 2			
6.6.1.8	NR SA FR1 event triggered reporting without gap in DRX for UE configured with highSpeedMeasCA-Scell-r17	NR Cell 1	NR Cell 6	NR Cell 13		intra-band
			NR Cell 10	NR Cell 30		inter-band
6.6.1.12	NR SA FR1 event triggered reporting with SSB index detection without measurement	NR Cell 1	NR Cell 2			

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
	gap in non-DRX mode for UE operating with 12 PRB SSB bandwidth					
6.6.1.9	NR SA FR1 event triggered reporting with MUSIM gap configured	NR Cell 1	NR Cell 2			
6.6.1.13	NR SA FR1 event triggered reporting tests without gap in DRX under Cell DTX	NR Cell 1	NR Cell 2			
6.6.2.1	NR SA FR1-FR1 event-triggered reporting in non-DRX	NR Cell 6	NR Cell 3			
6.6.2.2	NR SA FR1-FR1 event-triggered reporting in DRX	NR Cell 6	NR Cell 3			
6.6.2.5	NR SA FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection	NR Cell 6	NR Cell 3			
6.6.2.6	NR SA FR1-FR1 event-triggered reporting in DRX with SSB time index detection	NR Cell 6	NR Cell 3			
6.6.2.9	NR SA FR1-FR1 event triggered reporting tests with additional mandatory gap pattern	NR Cell 6	NR Cell 3			
6.6.2.10	NR SA FR1-FR1 event triggered reporting tests for FR1 without gap when DRX is used	NR Cell 6	NR Cell 3			
6.6.2.11	NR SA FR1-FR1 event triggered reporting tests for FR1 without gap when DRX is not used	NR Cell 6	NR Cell 3			
6.6.2.12	NR SA FR1-FR1 event triggered reporting tests without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17	NR Cell 6	NR Cell 3			
6.6.2.13	NR SA FR1-FR1 event triggered reporting using MUSIM gap with lower and higher priority	NR Cell 6	NR Cell 3			
6.6.2.14	NR SA FR1-FR1 event triggered reporting using MUSIM gap with shorter MGRP	NR Cell 6	NR Cell 3			
6.6.2.15	NR SA FR1 event triggered reporting without SSB index detection in DRX mode for UE operating on a cell with less than 5MHz BW	NR Cell 6	NR Cell 3			
6.6.4.1	NR SA FR1 SSB-based L1-RSRP measurement in non-DRX	NR Cell 1				
6.6.4.2	NR SA FR1 SSB-based L1-RSRP measurement in DRX	NR Cell 1				
6.6.4.3	NR SA FR1 CSI-RS-based L1-RSRP measurement in non-DRX	NR Cell 1				
6.6.4.4	NR SA FR1 CSI-RS-based L1-RSRP measurement in DRX	NR Cell 1				
6.6.4.5	NR SA FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16	NR Cell 1				
6.6.4.6	NR SA FR1 Inter-cell SSB based L1-RSRP measurements on PCell in DRX	NR Cell 1	NR Cell 2			
6.6.6.1	NR SA FR1 SRS-RSRP measurement in non-DRX	NR Cell 1				
6.6.8.1	NR SA FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX	NR Cell 1				
6.6.8.2	NR SA FR1 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX	NR Cell 1				
6.6.8.3	NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX	NR Cell 1				
6.7.8.1	NR SA FR1 SRS-RSRP measurement accuracy	NR Cell 1				
6.6.9.1	NR SA FR1 Idle mode CA/DC measurement for FR1	NR Cell 1	NR Cell 6			intra-band
			NR Cell 10			inter-band

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
6.6.17.1	NR SA FR1 event triggered reporting tests with autonomous activation/deactivation Pre-MG	NR Cell 1	NR Cell 2			
6.6.17.2	NR SA FR1 event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation	NR Cell 1	NR Cell 2			
6.6.18.1	NR SA FR1 event-triggered reporting for concurrent gaps non-overlap with SSB-based measurements in both inter-frequency layers	NR Cell 6	NR Cell 3	NR Cell 1		
6.6.18.2	NR SA FR1 event-triggered reporting for concurrent gaps partially-overlap with SSB-based measurements in both inter-frequency layers	NR Cell 6	NR Cell 3	NR Cell 1		
6.6.18.4	NR SA FR1 event triggered reporting tests for PRS and SSB measurement in FR1 without SSB time index detection when DRX is not used	NR Cell 6	NR Cell 3	NR Cell 13		
6.6.19.1	NR SA FR1 event-triggered reporting tests with NCSG under non-DRX in FR1	NR Cell 1	NR Cell 2			
6.6.19.2	NR SA FR1 event-triggered reporting tests for FR1 with NCSG for inter-frequency measurement	NR Cell 6	NR Cell 3			
6.6.19.4	NR SA FR1 Event triggered reporting on SCC with deactivated SCell test with per-UE NCSG under non-DRX	NR Cell 1	NR Cell 6	NR Cell 13		intra-band
			NR Cell 10	NR Cell 30		inter-band
6.6.20.1	UE Rx-Tx time difference measurement with PRS for RTT-based PDC	NR Cell 1				
6.6.21.1	UE Rx-Tx time difference measurement with TRS for RTT-based PDC	NR Cell 1				
6.6.24.1	NR SA FR1 event-triggered reporting without gap with interruptions	NR Cell 1	NR Cell 2			
6.6.24.2	NR SA FR1-FR1 event-triggered reporting without gap with interruption with SSB index reading	NR Cell 6	NR Cell 3			
6.6.24.3	NR SA FR1-FR1 event-triggered reporting without gap with interruption	NR Cell 6	NR Cell 3			
6.6.24.4	NR SA FR1-FR1 event-triggered reporting without gap without interruption	NR Cell 6	NR Cell 3			
6.6.24.5	NR SA FR1 event-triggered reporting without gap without interruption	NR Cell 1	NR Cell 2			
6.6.26.1	Intra-frequency SSB based L1-RSRP measurement	NR Cell 1	NR Cell 2			
6.6.27.1	Inter-frequency SSB based L1-RSRP measurement with measurement gap	NR Cell 6	NR Cell 3			
6.6.28.1	Inter-frequency SSB based L1-RSRP measurement without measurement gap	NR Cell 6	NR Cell 3			
6.7.1.1.1	NR SA FR1 SS-RSRP absolute measurement accuracy	NR Cell 489	NR Cell 1			
6.7.1.1.2	NR SA FR1 SS-RSRP relative measurement accuracy	NR Cell 489	NR Cell 1			
6.7.1.2.1	NR SA FR1-FR1 SS-RSRP absolute measurement accuracy	NR Cell 6	NR Cell 3			
6.7.1.2.2	NR SA FR1-FR1 SS-RSRP relative measurement accuracy	NR Cell 6	NR Cell 3			
6.7.1.3.1	NR SA FR1-FR2 SS-RSRP absolute measurement accuracy	NR Cell 1	NR Cell 2			
6.7.1.3.2	NR SA FR1-FR2 SS-RSRP relative measurement accuracy	NR Cell 1	NR Cell 2			
6.7.2.1	NR SA FR1 SS-RSRQ measurement accuracy	NR Cell 1	NR Cell 2			
6.7.2.2.1	NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy	NR Cell 6	NR Cell 3			
6.7.2.2.2	NR SA FR1-FR1 SS-RSRQ relative measurement accuracy	NR Cell 6	NR Cell 3			

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
6.7.3.1	NR SA FR1 SS-SINR measurement accuracy	NR Cell 1	NR Cell 2			
6.7.3.2.1	NR SA FR1-FR1 SS-SINR absolute measurement accuracy	NR Cell 6	NR Cell 3			
6.7.3.2.2	NR SA FR1-FR1 SS-SINR relative measurement accuracy	NR Cell 6	NR Cell 3			
6.7.4.1.1	NR SA FR1 SSB based L1-RSRP absolute measurement accuracy	NR Cell 1				
6.7.4.1.2	NR SA FR1 SSB based L1-RSRP relative measurement accuracy	NR Cell 1				
6.7.4.2.1	NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy	NR Cell 1				
6.7.4.2.2	NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy	NR Cell 1				
6.7.9.1	NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	NR Cell 1				
6.7.9.2	NR SA FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy	NR Cell 1				
6.7.9.3	NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	NR Cell 1				
6.7.10.1.1	NR SA FR1 CSI-RSRP absolute measurement accuracy	NR Cell 489	NR Cell 1			
6.7.10.1.2	NR SA FR1 CSI-RSRP relative measurement accuracy	NR Cell 489	NR Cell 1			
6.7.10.2.1	NR SA FR1-FR1 CSI-RSRP absolute measurement accuracy	NR Cell 6	NR Cell 3			
6.7.10.2.2	NR SA FR1-FR1 CSI-RSRP relative measurement accuracy	NR Cell 6	NR Cell 3			
6.7.17.1.1	Inter-frequency L1-RSRP absolute accuracy requirements for neighbour cell	NR Cell 6	NR Cell 3			
6.7.17.1.2	Void					

Table E.4-2 defines the cell configuration mapping for NR/5GC FR1 – E-UTRA Inter-RAT test cases (serving cell in NR) in chapter 6 of this test specification.

Table E.4-2: Cell configuration mapping for SA FR1 – E-UTRA Inter-RAT RRM testing

TC	Description	38.533 NR Cell1	38.533 LTE Cell2	38.533 LTE Cell3	38.533 LTE Cell4	CA Type
6.1.2.1	NR SA FR1 – E-UTRA cell re-selection to higher priority E-UTRA	NR Cell 1	LTE Cell 1			
6.1.2.2	NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA	NR Cell 1	LTE Cell 1			
6.1.2.3	NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRAN for UE fulfilling low mobility relaxed measurement criterion	NR Cell 1	LTE Cell 1			
6.1.2.4	NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRAN for UE fulfilling not-at-cell edge relaxed measurement criterion	NR Cell 1	LTE Cell 1			
6.1.2.5	NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA for UE configured with highSpeedMeasFlag-r16	NR Cell 1	LTE Cell 11			
6.3.1.4	NR SA FR1 – E-UTRA handover with known target cell	NR Cell 1	LTE Cell 1			
6.3.1.5	NR SA FR1 – E-UTRA handover with unknown target cell	NR Cell 1	LTE Cell 1			
6.3.2.3.2	NR SA FR1 – E-UTRA RRC connection release with redirection	NR Cell 1	LTE Cell 1			
6.6.3.1	NR SA FR1 – E-UTRAN event-triggered reporting in non-DRX	NR Cell 1	LTE Cell 1			

TC	Description	38.533 NR Cell1	38.533 LTE Cell2	38.533 LTE Cell3	38.533 LTE Cell4	CA Type
6.6.3.2	NR SA FR1 – E-UTRAN event-triggered reporting in DRX	NR Cell 1	LTE Cell 1			
6.6.3.3	NR SA FR1 – E-UTRAN event-triggered reporting in DRX for UE configured with highSpeedMeasFlag-r16	NR Cell 1	LTE Cell 1			
6.6.15.1	NR SA FR1 Idle Mode measurements of inter-RAT CA candidate cells for early reporting	NR Cell 1	LTE Cell 1			
6.6.19.3	NR SA FR1 – E-UTRAN event-triggered reporting in non-DRX in FR1 with NCSG	NR Cell 1	LTE Cell 1			
6.6.25.1	NR SA FR1 - E-UTRAN event-triggered reporting without gap without interruption	NR Cell 1	LTE Cell 1			
6.7.5.1	NR SA FR1 – E-UTRAN RSRP absolute measurement accuracy	NR Cell 1	LTE Cell 1			
6.7.6.1	NR SA FR1 – E-UTRAN RSRQ absolute measurement accuracy	NR Cell 1	LTE Cell 1			
6.7.7.1	NR SA FR1 – E-UTRAN RS-SINR absolute measurement accuracy	NR Cell 1	LTE Cell 1			

Table E.4-3: Cell configuration mapping for SA FR1 – UTRA FDD Inter-RAT RRM testing

TC	Description	38.533 NR Cell1	38.533 UTRA Cell2	38.533 UTRA Cell3	38.533 UTRA Cell4	CA Type
6.3.1.6	NR SA FR1 – UTRA cell re-selection to higher priority UTRA	NR Cell 1	UTRA Cell 1			
6.6.5.1	NR SA FR1 – UTRAN event-triggered reporting in non-DRX	NR Cell 1	UTRA Cell 1			

Table E.4-4 defines the multi-cell configuration mapping for NR/5GC FR1 – E-UTRA Inter-RAT test cases (serving cell in NR) in chapter 6 of this test specification.

Table E.4-4: Multi-cell configuration mapping for SA FR1 – E-UTRA Inter-RAT RRM testing

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 LTE Cell3	38.533 LTE Cell 4	CA Type
6.6.18.3	NR SA FR1 NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1	NR Cell 6	NR Cell 3	LTE Cell 1		

E.5 Cell configuration mapping for SA FR2 test cases in Chapter 7

Table E.5-1 defines the cell configuration mapping for NR/5GC FR2 test cases in chapter 7 of this test specification.

Table E.5-1: Cell configuration mapping for SA FR2 RRM testing

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
7.1.1.1	NR SA FR2 cell re-selection	NR Cell 1	NR Cell 11			
7.1.1.2	NR SA FR2-FR2 cell re-selection	NR Cell 1	NR Cell 23			
7.1.1.3	NR SA FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	NR Cell 1	NR Cell 2			
7.1.1.4	NR SA FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	NR Cell 1	NR Cell 2			
7.1.1.5	NR SA FR2-FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	NR Cell 1	NR Cell 2			

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
7.1.1.6	NR SA FR2-FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	NR Cell 1	NR Cell 2			
7.1.1.7	NR SA FR2 cell re-selection for power class 6 UE configured with *highSpeedMeasFlagFR2-r17*	NR Cell 1	NR Cell 2			
7.1.1.8	NR SA FR2 inter-frequency cell re-selection for power class 6 UE configured with *highSpeedMeasFlagFR2-r17*	NR Cell 1	NR Cell 23			
7.2.1.1	TA validation for CG-SDT in FR2	NR Cell 1				
7.3.1.1	NR SA FR1-FR2 Inter-frequency handover; unknown target cell	NR Cell 1	NR Cell 6			
7.3.1.2	NR SA FR2 Intra-frequency handover; unknown target cell	NR Cell 1	NR Cell 2			
7.3.1.3	NR SA FR2-FR2 Inter-frequency handover; unknown target cell	NR Cell 1	NR Cell 6			
7.3.1.4	NR SA FR1-FR2 synchronous DAPS handover	NR Cell 1	NR Cell 10			
7.3.1.5	NR SA FR1-FR2 asynchronous DAPS handover	NR Cell 1	NR Cell 10			
7.3.2.1.1	NR SA FR2 RRC re-establishment	NR Cell 1				
7.3.2.1.2	NR SA FR2-FR2 re-establishment	NR Cell 1				
7.3.2.1.3	NR SA FR2 RRC re-establishment without serving cell timing	NR Cell 1	NR Cell 2			
7.3.2.2.1	NR SA FR2 contention based random access	NR Cell 1				
7.3.2.2.2	NR SA FR2 non-contention based random access	NR Cell 1				
7.3.2.2.4	NR SA FR2 2-step non-contention based random access	NR Cell 1				
7.3.2.3.1	NR SA FR2-FR2 RRC connection release with redirection	NR Cell 1	NR Cell 6			
7.3.3.1	NR SA FR2 conditional handover	NR Cell 1	NR Cell 2			
7.3.3.2	NR SA FR2-FR2 conditional handover	NR Cell 1	NR Cell 6			
7.3.4.1	NR SA FR2 RACH based Intra-frequency PCell switch from FR2 to FR2	NR Cell 1	NR Cell 2			
7.3.4.2	NR SA FR2 RACH-less Intra-frequency PCell switch from FR2 to FR2	NR Cell 1	NR Cell 2			
7.3.4.3	NR SA FR2 RACH-based Inter-frequency LTM PCell switch from FR2 to FR2	NR Cell 1	NR Cell 6			
7.3.3.3	NR SA FR2 intra-frequency NES triggering conditional handover	NR Cell 1	NR Cell 2			
7.3.3.4	NR SA FR2-FR1 inter-frequency NES triggering conditional handover	NR Cell 1	NR Cell 6			
7.3.3.5	NR SA FR2 NR conditional handover including target MCG and target SCG from FR1-FR2 NR-DC to FR1-FR2 NR-DC	NR Cell 1	NR Cell 2	NR Cell 3	NR Cell 12	
7.3.5.1	NR SA FR2 RACH-based Intra-frequency LTM PSCell switch from FR2 to FR2	NR Cell 1	NR Cell 6	NR Cell 3		
7.4.1.1	NR SA FR2 UE transmit timing accuracy	NR Cell 1				
7.4.1.3	NR SA FR2 UE Transmit Timing Test with 2-TA for FR2 UE supporting *multiDCI-IntraCellMultiTRP-TwoTA-r18*	NR Cell 1				
7.4.3.1	NR SA FR2 timing advance adjustment accuracy	NR Cell 1				
7.5.1.1	Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode	NR Cell 1				
7.5.1.2	Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode	NR Cell 1				
7.5.1.3	Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode	NR Cell 1				

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
7.5.1.4	Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode	NR Cell 1				
7.5.1.9	NR SA FR2 radio link monitoring UE scheduling restrictions	NR Cell 1				
7.5.3.3	SCell Activation and deactivation for SCell in FR2 inter-band in non-DRX	NR Cell 1	NR Cell 2			
7.5.3.4	NR SA FR2 direct SCell activation at SCell addition of known SCell	NR Cell 1	NR Cell 6			
7.5.3.5	NR SA FR2 direct SCell activation at handover with known SCell	NR Cell 1	NR Cell 6	NR Cell 2		
7.5.3.13	NR SA FR2 SCell Activation for SCell in FR2 intra-band in non-DRX	NR Cell 1	NR Cell 6			intra-band
7.5.3.14	NR SA FR2 SCell Activation for known SCell in FR2 inter-band	NR Cell 1	NR Cell 10			
7.5.5.1	NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX	NR Cell 1				
7.5.5.2	NR SA FR2 SSB-based beam failure detection and link recovery in DRX	NR Cell 1				
7.5.5.3	NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX	NR Cell 1				
7.5.5.4	NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX	NR Cell 1				
7.5.5.6	NR SA FR2 Scell CSI-RS-based beam failure detection and link recovery in non-DRX	NR Cell 1	NR Cell 6			
7.5.5.7	NR SA FR2 Scell CSI-RS-based beam failure detection and link recovery in DRX	NR Cell 1	NR Cell 6			
7.5.5.8	FFS					
7.5.5.9	NR SA FR2 SCell TRP specific CSI-RS-based Beam Failure Detection and Link Recovery in DRX	NR Cell 1	NR Cell 6			
7.5.5.10	NR SA FR2 PCell TRP specific SSB-based Beam Failure Detection and Link Recovery in non-DRX	NR Cell 1				
7.5.6.1	NR SA FR2 DCI-based DL active BWP switch in non-DRX	NR Cell 1				
7.5.8.1.1	NR SA PCell FR2 MAC-CE based active TCI state switch for a known TCI state	NR Cell 1				
7.5.8.2.1	NR SA PCell FR2 RRC based active TCI state switch for a known TCI state	NR Cell 1				
7.5.8.3.1	NR SA FR2 HST active TCI state switch for a known TCI state	NR Cell 1				
7.5.8.3.2	NR SA FR2 HST active TCI state switch for PC6 UE supporting *tci-StateSwitchInd-r18* a known TCI state	NR Cell 1				
7.5.8.4	NR SA FR2 DCI based active TCI state switch with m-DCI for simultaneous reception	NR Cell 1				
7.5.8.5	NR SA FR2 Single-DCI based active TCI state switch with known target TCI states for simultaneous reception	NR Cell 1				
7.5.9.1.1	NR PCell FR2 uplink spatial relation switch associated with known DL-RS (MAC-CE based)	NR Cell 1				
7.5.9.2.1	NR PCell FR2 uplink spatial relation switch associated with known DL-RS (RRC based)	NR Cell 1				
7.5.11.1	NR SA FR2 UE UL carrier RRC reconfiguration delay	NR Cell 1	NR Cell 2			
7.5.12.1	Addition and Release Delay of PSCell	NR Cell 1	NR Cell 10			
7.5.13.1	NR SA FR2 MAC-CE based active joint TCI state switch	NR Cell 1				
7.5.13.2	NR SA FR2 MAC-CE based active uplink TCI state switch	NR Cell 1				

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
7.5.13.3	NR SA FR2 MAC-CE based active downlink TCI state switch	NR Cell 1	NR Cell 6			
7.5.13.6.1	NR SA FR2 MAC-CE based active uplink TCI state switch for 2 known TCI states	NR Cell 1				
7.5.14	NR SA FR2 PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2	NR Cell 1	NR Cell 10			
7.6.1.1	NR SA FR2 event-triggered reporting without gap in non-DRX	NR Cell 1	NR Cell 2			
7.6.1.2	NR SA FR2 event-triggered reporting without gap in DRX	NR Cell 1	NR Cell 2			
7.6.1.3	NR SA FR2 event-triggered reporting with gap in non-DRX	NR Cell 1	NR Cell 2			
7.6.1.4	NR SA FR2 event-triggered reporting with gap in DRX	NR Cell 1	NR Cell 2			
7.6.1.5	NR SA FR2 event triggered reporting test without gap in non-DRX for UE configured with *highSpeedMeasFlagFR2-r17*	NR Cell 1	NR Cell 2			
7.6.2.1	NR SA FR2-FR2 event-triggered reporting in non-DRX	NR Cell 6	NR Cell 3			
7.6.2.2	NR SA FR2-FR2 event-triggered reporting in DRX	NR Cell 6	NR Cell 3			
7.6.2.3	NR SA FR2-FR2 event-triggered reporting in non-DRX with SSB time index detection	NR Cell 6	NR Cell 3			
7.6.2.4	NR SA FR2-FR2 event-triggered reporting in DRX with SSB time index detection	NR Cell 6	NR Cell 3			
7.6.2.5	NR SA FR1-FR2 event-triggered reporting in non-DRX	NR Cell 6	NR Cell 3			
7.6.2.6	NR SA FR1-FR2 event-triggered reporting in DRX	NR Cell 6	NR Cell 3			
7.6.2.7	NR SA FR1-FR2 event-triggered reporting in non-DRX with SSB time index detection	NR Cell 6	NR Cell 3			
7.6.2.8	NR SA FR1-FR2 event-triggered reporting in DRX with SSB time index detection	NR Cell 6	NR Cell 3			
7.6.2.10	SA FR2-FR2 event triggered reporting test without gap under non-DRX	NR Cell 6	NR Cell 3			
7.6.2.11	SA FR2-FR2 event triggered reporting test without gap under DRX	NR Cell 6	NR Cell 3			
7.6.2.20	NR SA FR2-FR2 event triggered reporting using MUSIM gap with higher priority	NR Cell 6	NR Cell 3			
7.6.2.21	NR SA FR2-FR2 event triggered reporting using MUSIM gap with shorter MGRP	NR Cell 6	NR Cell 3			
7.6.3.1	NR SA FR2 SSB-based L1-RSRP measurement in non-DRX	NR Cell 1				
7.6.3.2	NR SA FR2 SSB-based L1-RSRP measurement in DRX	NR Cell 1				
7.6.3.3	NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX	NR Cell 1				
7.6.3.4	NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX	NR Cell 1				
7.6.3.5	NR SA FR2 SSB based L1-RSRP measurement test when DRX is used for power class 6 UE configured with *highSpeedMeasFlagFR2-r17*	NR Cell 1				
7.6.3.6	NR SA FR2 Inter-cell SSB based L1-RSRP measurements on FR2 SCell when DRX is not used	NR Cell 10	NR Cell 1			Inter-band
7.6.6.1	NR SA FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	NR Cell 1				
7.6.6.2	NR SA FR2 SSB based CMR and dedicated IMR L1-SINR measurement accuracy	NR Cell 1				

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
7.6.6.3	NR SA FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	NR Cell 1				
7.6.13.1	UE Rx-Tx time difference measurement for propagation delay compensation using PRS in FR2	NR Cell 1				
7.6.13.2	NR SA FR2 UE Rx-Tx time difference measurement for propagation delay compensation using TRS	NR Cell 1				
7.6.14.1	NR SA FR2 event triggered reporting tests with pre-configured measurement gaps and autonomous activation/deactivation	NR Cell 1	NR Cell 2			
7.6.14.2	NR SA FR2 event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation	NR Cell 1	NR Cell 2			
7.6.15.1	NR SA FR2 event triggered reporting tests with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements	NR Cell 1	NR Cell 6	NR Cell 3		
7.6.15.2	NR SA FR2 event triggered reporting tests with concurrent measurement gaps without SSB time index detection when DRX is not used (PCell in FR2)	NR Cell 1	NR Cell 6	NR Cell 3		
7.6.15.3	NR SA FR2 event triggered reporting tests with concurrent measurement gaps with partially partial overlapping scenario for SSB-based measurements and PRS-based measurement	NR Cell 1	NR Cell 6	NR Cell 2		
7.6.16.1	NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX	NR Cell 1	NR Cell 2			
7.6.16.2	NR SA FR2 event triggered reporting tests on inter-frequency measurement with NCSG when DRX is not used(PCell in FR2)	NR Cell 6	NR Cell 3			
7.6.16.3	NR SA FR2 event triggered reporting test on deactivated SCell measurement via NCSG in non-DRX	NR Cell 1	NR Cell 6	NR Cell 13		Intra-band
7.6.17.1	NR SA FR2 and FR2-FR2 event-triggered reporting with concurrent Type-2 measurement gap and Pre-MG	NR Cell 1	NR Cell 2	NR Cell 6		
7.6.17.2	NR SA FR2-FR2 event-triggered reporting with two concurrent Pre-MGs	NR Cell 6	NR Cell 3			
7.6.18.1	NR SA FR2 event-triggered reporting with concurrent Type-2 measurement gap and NCSG	NR Cell 1	NR Cell 6	NR Cell 3		
7.6.19.1	NR SA FR2 event-triggered reporting without interruption outside gap	NR Cell 1	NR Cell 2			
7.6.19.2	NR SA FR2-FR2 SA event triggered reporting test without gap without interruption	NR Cell 1	NR Cell 2			
7.6.19.3	NR SA FR2-event triggered reporting test without gap without interruption under non-DRX	NR Cell 6	NR Cell 3			
7.6.20.1	NR SA FR2 Intra-frequency SSB based L1-RSRP measurement	NR Cell 1	NR Cell 2			
7.6.21.1	NR SA FR2 Inter-frequency SSB-based L1-RSRP measurement with measurement gap for LTM	NR Cell 1	NR Cell 6			
7.6.22.1	NR SA FR2 Inter-frequency SSB based L1-RSRP measurement without measurement gap in FR2	NR Cell 6	NR Cell 3			
7.7.1.1	NR SA FR2 SS-RSRP measurement accuracy	NR Cell 489	NR Cell 1			
7.7.1.2	NR SA FR2-FR2 SS-RSRP measurement accuracy	NR Cell 6	NR Cell 3			

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
7.7.1.3.1	NR SA FR1-FR2 SS-RSRP absolute measurement accuracy	NR Cell 1	NR Cell 10			
7.7.1.3.2	Void					
7.7.2.1	NR SA FR2 SS-RSRQ measurement accuracy	NR Cell 1	NR Cell 2			
7.7.2.2	NR SA FR2-FR2 SS-RSRQ measurement accuracy	NR Cell 6	NR Cell 3			
7.7.3.1	NR SA FR2 SS-SINR measurement accuracy	NR Cell 1	NR Cell 2			
7.7.3.2	NR SA FR2-FR2 SS-SINR measurement accuracy	NR Cell 6	NR Cell 3			
7.7.6.1	NR SA FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	NR Cell 1				
7.7.6.2	NR SA FR2 SSB based CMR and dedicated IMR L1-SINR measurement accuracy	NR Cell 1				
7.7.6.3	NR SA FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	NR Cell 1				
7.7.7.1.1	NR SA FR2 CSI-RSRP measurement accuracy	NR Cell 489	NR Cell 1			
7.7.7.2.1	NR SA FR2-FR2 CSI-RSRP measurement accuracy	NR Cell 6	NR Cell 3			
7.7.14.1	NR SA FR2 SSB based L1-RSRP measurement for group-based beam reporting	NR Cell 1				
7.7.14.2	NR SA FR2 CSI-RS based L1-RSRP measurement on resource set with repetition off	NR Cell 1				
7.7.15.1	NR SA FR2 SSB based inter-frequency L1-RSRP measurement	NR Cell 1	NR Cell 6			

E.6 Cell configuration mapping for E-UTRAN – SA test cases in Chapter 8

Table E.6-1 defines the cell configuration mapping for E-UTRAN - NR/5GC FR1 Inter-RAT test cases (serving cell in LTE) in chapter 8 of this test specification.

Table E.6-1: Cell configuration mapping for E-UTRA – SA FR1 Inter-RAT RRM testing

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
8.2.1.1	E-UTRA – NR FR1 cell re-selection to higher priority NR target cell	LTE Cell 1	NR Cell 1			
8.2.1.2	E-UTRA – NR FR1 Cell reselection to lower priority NR target Cell in FR1 for UE configured with highSpeedInterRAT-NR-r16	LTE Cell 1	NR Cell 1			
8.2.2.1	E-UTRA – NR FR1 Early Measurement Reporting	LTE Cell 1	NR Cell 1			
8.3.1.1	E-UTRA – NR FR1 handover with unknown target cell	LTE Cell 1	NR Cell 1			
8.4.1.1	E-UTRA – NR FR1 SFTD measurement delay in non-DRX	LTE Cell 1	NR Cell 1			
8.4.1.2	E-UTRA – NR FR1 SFTD measurement delay in DRX	LTE Cell 1	NR Cell 1			
8.4.2.1	E-UTRA event-triggered reporting of a NR FR1 neighbour cell without SSB time index detection in non-DRX	LTE Cell 1	NR Cell 1			
8.4.2.2	E-UTRA event-triggered reporting of a NR FR1 neighbour cell without SSB time index detection in DRX	LTE Cell 1	NR Cell 1			

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
8.2.1.1	E-UTRA – NR FR1 cell re-selection to higher priority NR target cell	LTE Cell 1	NR Cell 1			
8.2.1.2	E-UTRA – NR FR1 Cell reselection to lower priority NR target Cell in FR1 for UE configured with highSpeedInterRAT-NR-r16	LTE Cell 1	NR Cell 1			
8.2.2.1	E-UTRA – NR FR1 Early Measurement Reporting	LTE Cell 1	NR Cell 1			
8.3.1.1	E-UTRA – NR FR1 handover with unknown target cell	LTE Cell 1	NR Cell 1			
8.4.1.1	E-UTRA – NR FR1 SFTD measurement delay in non-DRX	LTE Cell 1	NR Cell 1			
8.4.1.2	E-UTRA – NR FR1 SFTD measurement delay in DRX	LTE Cell 1	NR Cell 1			
8.4.2.3	E-UTRA event-triggered reporting of a NR FR1 neighbour cell with SSB time index detection in non-DRX	LTE Cell 1	NR Cell 1			
8.4.2.4	E-UTRA event-triggered reporting of a NR FR1 neighbour cell with SSB time index detection in DRX	LTE Cell 1	NR Cell 1			
8.4.2.9	E-UTRA – NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection in DRX for UE configured with highSpeedInterRAT-NR-r16	LTE Cell 1	NR Cell 1			
8.5.1.1	E-UTRA – NR FR1 SFTD measurement accuracy	LTE Cell 1	NR Cell 1			
8.5.2.1.1.1	E-UTRA SS-RSRP absolute measurement accuracy of a NR FR1 neighbour cell	LTE Cell 1	NR Cell 1			
8.5.2.2.1	Void	LTE Cell 1	NR Cell 1			
8.5.2.3.1	E-UTRA SS-RSRP absolute measurement accuracy of a NR FR2 neighbour cell	LTE Cell 1	NR Cell 1			

Table E.6-2 defines the cell configuration mapping for E-UTRAN - NR/5GC FR2 Inter-RAT test cases (serving cell in LTE) in chapter 8 of this test specification.

Table E.6-2: Cell configuration mapping for E-UTRA – SA FR2 Inter-RAT RRM testing

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
8.2.2.2	E-UTRA – NR FR2 Early Measurement Reporting	LTE Cell 1	NR Cell 1			
8.4.2.5	E-UTRA event-triggered reporting of a NR FR2 neighbour cell without SSB time index detection in non-DRX	LTE Cell 1	NR Cell 1			
8.4.2.6	E-UTRA event-triggered reporting of a NR FR2 neighbour cell without SSB time index detection in DRX	LTE Cell 1	NR Cell 1			
8.4.2.7	E-UTRA event-triggered reporting of a NR FR2 neighbour cell with SSB time index detection in non-DRX	LTE Cell 1	NR Cell 1			
8.4.2.8	E-UTRA event-triggered reporting of a NR FR2 neighbour cell with SSB time index detection in DRX	LTE Cell 1	NR Cell 1			
8.4.3.1	E-UTRAN - NR SA FR2 event-triggered reporting without gap with interruption	LTE Cell 1	NR Cell 1			
8.5.2.1.2	E-UTRA SS-RSRP absolute measurement accuracy of a NR FR2 neighbour cell	LTE Cell 1	NR Cell 1			
8.5.2.2.2	SS-RSRQ	LTE Cell 1	NR Cell 1			
8.5.2.3.2	E-UTRA SS-RSRQ absolute measurement accuracy of a NR FR1 neighbour cell	LTE Cell 1	NR Cell 1			

E.7 Cell configuration mapping for NR sidelink test cases in Chapter 9

Table E.7-1 defines the cell configuration mapping for NR PC5 – NR SA FR1 Uu con-current test cases (serving cell in FR1) in chapter 9 of this test specification.

Table E.7-1: Cell configuration mapping for NR PC5 – NR SA FR1 Uu con-current RRM testing

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
9.1.1.3	NR SA FR1 UE transmit timing accuracy for FR1 NR cell as synchronization reference source	NR Cell 1				
9.1.2.1	NR SA FR1 initiation/cease of S-SSB transmission for FR1 NR cell as synchronization reference source	NR Cell 1				
9.1.5.1	NR SA FR1 congestion control measurement for concurrent operation	NR Cell 1				
9.1.6.1	NR SA FR1 interruption to WAN due to NR sidelink communication	NR Cell 1				

Table E.7-2 defines the cell configuration mapping for NR PC5 – NR SA FR2 Uu con-current test cases (serving cell in FR2) in chapter 9 of this test specification.

Table E.7-2: Cell configuration mapping for NR PC5 – SA FR2 con-current RRM testing

FFS

E.8 Cell configuration mapping for EN-DC FR1 Shared Spectrum test cases in Chapter 10

Table E.8-1 defines the cell configuration mapping for EN-DC FR1 Shared Spectrum test cases in chapter 10 of this test specification.

Table E.8-1: Cell configuration mapping for EN-DC FR1 Shared Spectrum RRM testing

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	38.533 LTE Cell5	CA Type
10.1.1.1.1	EN-DC FR1 4-step RA type contention-based random access for NR PSCell with CCA	LTE Cell 1	NR Cell 1				
10.1.1.1.2	EN-DC FR1 4-step RA type non-contention based random access for NR PSCell with CCA	LTE Cell 1	NR Cell 1				
10.1.1.1.3	EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA	LTE Cell 1	NR Cell 1				
10.1.1.1.4	EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA	LTE Cell 1	NR Cell 1				
10.1.2	EN-DC FR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA	LTE Cell 1	NR Cell 1	NR Cell 2		LTE Cell 2	
10.2.1.1	EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA	LTE Cell 1	NR Cell 1				
10.2.2.1	EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA	LTE Cell 1	NR Cell 1				
10.3.1.2	EN-DC FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA	LTE Cell 1	NR Cell 1				
10.3.1.3	EN-DC FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA	LTE Cell 1	NR Cell 1				
10.3.3.1	EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle	LTE Cell 1	NR Cell 1	NR Cell 6			Intra-band
				NR Cell 10			Inter-band
10.3.3.2	EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle	LTE Cell 1	NR Cell 1	NR Cell 6			Intra-band
				NR Cell 10			Inter-band
10.3.3.3	EN-DC FR1 SCell Activation and Deactivation of unknown NR SCell with NR PSCell and NR SCell under CCA	LTE Cell 1	NR Cell 1	NR Cell 6			Intra-band
				NR Cell 10			Inter-band
10.3.4.1	EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in non-DRX mode	LTE Cell 1	NR Cell 1				
10.3.4.2	EN-DC FR1 Beam Failure Detection and Link Recovery Test for PSCell configured with SSB-based BFD and LR in DRX mode	LTE Cell 1	NR Cell 1				
10.3.5.1	EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA	LTE Cell 1	NR Cell 1				
10.3.5.2.1	EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch in non-DRX in synchronous EN-DC	LTE Cell 1	NR Cell 1				
10.3.5.2.2	EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC	LTE Cell 1	NR Cell 1	NR Cell 6			Intra-band
				NR Cell 10			Inter-band
10.3.5.3.1	EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch in non-DRX in synchronous EN-DC	LTE Cell 1	NR Cell 1				
10.3.6.1	EN-DC FR1 Addition and Release Delay of known NR PSCell on the carrier under CCA	LTE Cell 1	NR Cell 1				
10.4.1.1	EN-DC FR1 Event-triggered reporting tests on PSCC without gaps under non-DRX and CCA	LTE Cell 1	NR Cell 1	NR Cell 2			
10.4.1.4	EN-DC FR1 Event-triggered reporting tests on PSCC with per-UE gaps under DRX and CCA	LTE Cell 1	NR Cell 1	NR Cell 2			

10.4.2.3	EN-DC FR1 event triggered reporting tests for FR1 with CCA cell without SSB time index detection when DRX is not used	LTE Cell 1	NR Cell 6	NR Cell 3			
10.4.2.4	EN-DC FR1 event triggered reporting tests for FR1 cell with CCA without SSB time index detection when DRX is used	LTE Cell 1	NR Cell 6	NR Cell 3			
10.4.2.5	EN-DC FR1 event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is not used	LTE Cell 1	NR Cell 6	NR Cell 3			
10.4.2.6	EN-DC FR1 event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is used	LTE Cell 1	NR Cell 6	NR Cell 3			
10.4.2.7	EN-DC FR1 event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used	LTE Cell 1	NR Cell 6	NR Cell 3			
10.4.2.8	EN-DC FR1 event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used	LTE Cell 1	NR Cell 6	NR Cell 3			
10.4.2.9	EN-DC FR1 event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used	LTE Cell 1	NR Cell 6	NR Cell 3			
10.4.2.10	EN-DC FR1 event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used	LTE Cell 1	NR Cell 6	NR Cell 3			
10.4.3.1	EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is not used	LTE Cell 1	NR Cell 1				
10.4.3.2	EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is used	LTE Cell 1	NR Cell 1				
10.4.3.3	EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used	LTE Cell 1	NR Cell 1				
10.4.3.4	EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used	LTE Cell 1	NR Cell 1				
10.4.4.1	EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	LTE Cell 1	NR Cell 1	NR Cell 2			
10.4.4.2	EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used	LTE Cell 1	NR Cell 1	NR Cell 2			
10.4.4.3	EN-DC FR1 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used	LTE Cell 1	NR Cell 1	NR Cell 2			
10.4.4.4	EN-DC FR1 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used	LTE Cell 1	NR Cell 1	NR Cell 2			
10.5.1.1	EN-DC FR1 intra-frequency SS-RSRP measurement accuracy on a CCA serving cell	LTE Cell 1	NR Cell 1	NR Cell 2			
10.5.1.2	EN-DC FR1-FR1 inter-frequency SS-RSRP measurement accuracy with CCA serving cell and CCA target cell	LTE Cell 1	NR Cell 6	NR Cell 3			
10.5.2.1	EN-DC FR1 intra-frequency SS-RSRQ measurement accuracy with serving cell and target cell under CCA	LTE Cell 1	NR Cell 1	NR Cell 2			
10.5.2.2	EN-DC FR1-FR1 inter-frequency SS-RSRQ measurement accuracy with serving cell and target cell under CCA	LTE Cell 1	NR Cell 6	NR Cell 3			
10.5.3.1	EN-DC FR1 intra-frequency SS-SINR measurement accuracy on PSCC under CCA	LTE Cell 1	NR Cell 1	NR Cell 2			
10.5.3.2	EN-DC FR1-FR1 inter-frequency SS-SINR measurement accuracy on PSCC under CCA	LTE Cell 1	NR Cell 6	NR Cell 3			

10.5.3.3	EN-DC FR1 intra-frequency SS-SINR measurement accuracy on SCC under CCA	LTE Cell 1	NR Cell 1	NR Cell 2			
10.5.4.1	EN-DC FR1 SSB based L1-RSRP measurement	LTE Cell 1	NR Cell 1	NR Cell 2			
10.5.5.1	EN-DC FR1 RSSI measurement accuracy on PSCC with CCA	LTE Cell 1	NR Cell 1	NR Cell 2			
10.5.5.2	EN-DC FR1 RSSI measurement accuracy on SCC with CCA	LTE Cell 1	NR Cell 1	NR Cell 6			Intra-band
				NR Cell 10			Inter-band
10.5.5.3	EN-DC FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA	LTE Cell 1	NR Cell 1	NR Cell 2			
10.5.6.1	EN-DC FR1 Channel occupancy measurement accuracy on PSCC with CCA	LTE Cell 1	NR Cell 1	NR Cell 2			
10.5.6.2	EN-DC FR1 Channel occupancy measurement accuracy on SCC with CCA	LTE Cell 1	NR Cell 1	NR Cell 6			Intra-band
				NR Cell 10			Inter-band
10.5.6.3	EN-DC FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA	LTE Cell 1	NR Cell 1	NR Cell 2			
NOTE 1: Intra-frequency cells are selected such that serving and neighbour cells satisfy $(PCI_{neighbor} - PCI_{serving})\ mod\ 3\ \neq 0$.							

E.9 Cell configuration mapping for SA FR1 Shared Spectrum test cases in Chapter 11

Table E.9-1 defines the cell configuration mapping for SA FR1 Shared Spectrum test cases in chapter 11 of this test specification.

Table E.9-1: Cell configuration mapping for SA FR1 Shared Spectrum RRM testing

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 LTE Cell4	CA Type
11.1.1.1	NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell	NR Cell 1	NR Cell 11			
11.1.1.2	NR SA FR1 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell	NR Cell 1	NR Cell 23			
11.1.2.1	NR SA FR1 Cell re-selection to NR with source NR carrier frequency under CCA	NR Cell 1	NR Cell 23			
11.1.3.1	NR SA FR1 Cell re-selection from NR carrier with target NR carrier frequency under CCA	NR Cell 1	NR Cell 23			
11.1.4.1	NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA	NR Cell 1			LTE Cell 1	
11.1.4.2	NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA	NR Cell 1			LTE Cell 1	
11.2.1.1	NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell	NR Cell 1	NR Cell 2			
11.2.1.2	NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell	NR Cell 1	NR Cell 2			
11.2.1.3	NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell	NR Cell 6	NR Cell 3			
11.2.1.4	NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell	NR Cell 6	NR Cell 3			
11.2.1.5	NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell	NR Cell 6	NR Cell 3			
11.2.1.6	NR SA FR1 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell	NR Cell 6	NR Cell 3			
11.2.1.7	NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell	NR Cell 1			LTE Cell 1	
11.2.1.8	NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell	NR Cell 1			LTE Cell 1	
11.2.2.1.1	NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1	NR Cell 1	NR Cell 2			
11.2.2.1.2	NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1	NR Cell 6	NR Cell 3			
11.2.2.1.3	NR SA FR1 Intra-frequency RRC Re-establishment with CCA without serving cell timing	NR Cell 1	NR Cell 2			
11.2.2.1.4	NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA	NR Cell 6	NR Cell 3			
11.2.2.2.1	NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA	NR Cell 1				
11.2.2.2.2	NR SA FR1 4-step RA type non-contention based random access for NR PSCell with CCA	NR Cell 1				
11.2.2.2.3	NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA	NR Cell 1				
11.2.2.2.4	NR SA FR1 2-step RA type non-contention-based random access for NR PCell with CCA	NR Cell 1				
11.2.2.3.1	NR SA FR1 Redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA	NR Cell 6	NR Cell 3			
11.2.2.3.2	NR SA FR1 Redirection from NR FR1 carrier without CCA to NR FR1 carrier under CCA	NR Cell 6	NR Cell 3			

11.3.1.1	NR SA FR1 UE Transmit Timing Test with PCell under DL CCA	NR Cell 1				
11.3.2.1	NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA	NR Cell 1				
11.4.1.2	NA SA FR1 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA	NR Cell 1				
11.4.1.3	NR SA FR1 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode under CCA	NR Cell 1				
11.4.3.1	NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle	NR Cell 1	NR Cell 6 NR Cell 10			Intra-band Inter-band
11.4.3.2	NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 640 ms SCell measurement cycle	NR Cell 1	NR Cell 6 NR Cell 10			Intra-band Inter-band
11.4.3.3	NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA	NR Cell 1	NR Cell 6 NR Cell 10			Intra-band Inter-band
11.4.4.1	NR SA FR1 E-UTRAN – NR interruptions during SCell operations with CCA	NR Cell 1				
11.4.4.2	NR SA FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle	NR Cell 1				
11.4.5.1	NR SA FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle	NR Cell 1				
11.4.5.2.1	NR SA FR1 DCI-based DL active BWP switch of PCell with non-DRX under CCA	NR Cell 1	NR Cell 6 NR Cell 10			Intra-band Inter-band
11.4.5.2.2	NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA	NR Cell 1				
11.4.5.3.1	NR SA FR1 DL active BWP switch of Cell with non-DRX	NR Cell 1				
11.5.1.1	NR SA FR1 Event-triggered reporting tests on PCC under CCA without gaps under non-DRX	NR Cell 1	NR Cell 2			
11.5.1.2	NR SA FR1 Event-triggered reporting tests on PCC under CCA without gaps under DRX	NR Cell 1	NR Cell 2			
11.5.2.3	NR SA FR1 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is not used	NR Cell 6	NR Cell 3			
11.5.2.4	NR SA FR1 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used	NR Cell 6	NR Cell 3			
11.5.2.5	NR SA FR1 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used	NR Cell 6	NR Cell 3			
11.5.2.6	NR SA FR1 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used	NR Cell 6	NR Cell 3			
11.5.2.7	NR SA FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	NR Cell 6	NR Cell 3			
11.5.2.8	NR SA FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used	NR Cell 6	NR Cell 3			
11.5.2.9	NR SA FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used	NR Cell 6	NR Cell 3			
11.5.2.10	NR SA FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used	NR Cell 6	NR Cell 3			

11.5.3.1	NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX	NR Cell 1			LTE Cell 1	
11.5.3.2	NR SA FR1 - E-UTRAN event-triggered reporting in DRX	NR Cell 1			LTE Cell 1	
11.5.4.1	NR SA FR1 SSB based L1-RSRP measurement when DRX is not used	NR Cell 1				
11.5.4.2	NR SA FR1 SSB based L1-RSRP measurement when DRX is used	NR Cell 1				
11.5.4.3	NR SA FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used	NR Cell 1				
11.5.4.4	NR SA FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used	NR Cell 1				
11.6.1.1	NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA	NR Cell 489	NR Cell 1			
11.6.1.2	NR SA FR1 Intra-frequency measurement accuracy on SCC on a carrier frequency with CCA	NR Cell 489	NR Cell 6	NR Cell 3		Intra-band
			NR Cell 10			Inter-band
11.6.2.1	NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA	NR Cell 1	NR Cell 2			
11.6.2.2	NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA	NR Cell 6	NR Cell 3			
11.6.2.3	NR SA FR1 Intra-frequency measurement accuracy on SCC	NR Cell 1	NR Cell 2			
11.6.2.4	NR SA FR1 Inter-frequency measurement accuracy	NR Cell 6	NR Cell 3			
11.6.3.1	NR SA FR1 Intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA	NR Cell 1	NR Cell 2			
11.6.3.2	NR SA FR1 Inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA	NR Cell 6	NR Cell 3			
11.6.3.3	NR SA FR1 Intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA	NR Cell 1	NR Cell 6			Intra-band
			NR Cell 10			Inter-band
11.6.3.4	NR SA FR1 Inter-frequency measurement accuracy	NR Cell 6	NR Cell 3			
11.6.4.1	NR SA FR1 SSB based L1-RSRP measurement accuracy with CCA	NR Cell 1				
11.6.5.1	NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA	NR Cell 1	NR Cell 2			
11.6.5.2	NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA	NR Cell 1	NR Cell 6			Intra-band
			NR Cell 10			Inter-band
11.6.5.3	NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA	NR Cell 1	NR Cell 2			
11.6.6.1	NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA	NR Cell 1	NR Cell 2			
11.6.6.2	NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA	NR Cell 1	NR Cell 6			Intra-band
			NR Cell 10			Inter-band
11.6.6.3	NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA	NR Cell 1	NR Cell 2			

NOTE 1: Intra-frequency cells are selected such that serving and neighbour cells satisfy $(PCI_{neighbor} - PCI_{serving})\ mod\ 3 \neq 0$.

E.10 Cell configuration mapping for E-UTRAN – SA FR1 Shared Spectrum test cases in Chapter 12

Table E.10-1 defines the cell configuration mapping for E-UTRAN – SA FR1 Shared Spectrum test cases in Chapter 12 of this test specification.

Table E.10-1: Cell configuration mapping for E-UTRAN – SA FR1 Shared Spectrum RRM testing

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
12.1.1.1	E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA	LTE Cell 1	NR Cell 1			
12.2.1.1	E-UTRAN - NR with CCA handover with known target cell	LTE Cell 1	NR Cell 1			
12.4.1.1	E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX	LTE Cell 1	NR Cell 1			
12.4.2.1	E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA	LTE Cell 1	NR Cell 1			
12.4.2.2	E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA	LTE Cell 1	NR Cell 1			
12.4.2.3	E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA	LTE Cell 1	NR Cell 1			
12.4.2.4	E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA	LTE Cell 1	NR Cell 1			
12.5.1.1	E-UTRA - NR FR1 SFTD measurement accuracy under CCA	LTE Cell 1	NR Cell 1			
NOTE 1: Intra-frequency cells are selected such that serving and neighbour cells satisfy $(PCI_{neighbor} - PCI_{serving})\ mod\ 3 \neq 0$.						

E.11 Cell configuration mapping for SA FR1 with SCell in Shared Spectrum test cases in Chapter 13

Table E.11-1 defines the cell configuration mapping for SA FR1 with SCell in Shared Spectrum test cases in Chapter 13 of this test specification.

Table E.11-1: Cell configuration mapping for SA FR1 with SCell in Shared Spectrum RRM testing

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
13.2.2.1	NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle	NR Cell 1	NR Cell 10			Intra-band
			NR Cell 6			Inter-band
13.2.2.2	NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle	NR Cell 1	NR Cell 10			Intra-band
			NR Cell 6			Inter-band
13.2.2.3	NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA	NR Cell 1	NR Cell 10			Intra-band
			NR Cell 6			Inter-band
13.3.1.1	NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under non-DRX	NR Cell 1	NR Cell 10	NR Cell 2		Intra-band
			NR Cell 6			Inter-band
13.3.1.2	NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under DRX	NR Cell 1	NR Cell 10	NR Cell 2		Intra-band
			NR Cell 6			Inter-band
13.3.1.3	NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX	NR Cell 1	NR Cell 10	NR Cell 2		Intra-band
			NR Cell 6			Inter-band
13.3.1.4	NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX	NR Cell 1	NR Cell 10	NR Cell 2		Intra-band
			NR Cell 6			Inter-band
13.3.2.3	NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is not used	NR Cell 1	NR Cell 10	NR Cell 2		Intra-band
			NR Cell 6			Inter-band
13.3.2.4	NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used	NR Cell 1	NR Cell 10	NR Cell 2		Intra-band
			NR Cell 6			Inter-band
13.3.2.5	NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is not used	NR Cell 1	NR Cell 10	NR Cell 2		Intra-band
			NR Cell 6			Inter-band
13.3.2.6	NR SA FR1-FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used	NR Cell 1	NR Cell 10	NR Cell 2		Intra-band
			NR Cell 6			Inter-band
13.3.3.1	NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used	NR Cell 1	NR Cell 10			Intra-band
			NR Cell 6			Inter-band
13.3.3.2	NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used	NR Cell 1	NR Cell 10			Intra-band
			NR Cell 6			Inter-band
13.4.1.1	NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA	NR Cell 1	NR Cell 489	NR Cell 6		
13.4.2.1	NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA	NR Cell 1	NR Cell 489	NR Cell 6		
13.4.3.1	NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA	NR Cell 1	NR Cell 489	NR Cell 6		
13.4.4.1	NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA	NR Cell 1	NR Cell 6			
13.4.5.1	NR SA FR1 RSSI measurement accuracy on a carrier with CCA	NR Cell 1	NR Cell 6			
13.4.5.2	NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA	NR Cell 1	NR Cell 6			
13.4.6.1	NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA	NR Cell 1	NR Cell 6			
13.4.6.2	NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA	NR Cell 1	NR Cell 6			
NOTE 1: Intra-frequency cells are selected such that serving and neighbour cells satisfy $(PCI_{neighbor} - PCI_{serving})\ mod\ 3 \neq 0$.						

E.12 Cell configuration mapping for SA Satellite Access test cases in Chapter 14

Table E.12-1 defines the cell configuration mapping for SA Satellite Access test cases in Chapter 14 of this test specification.

Table E.12-1: Cell configuration mapping for SA Satellite Access RRM testing

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
14.1.1	NR SA FR1 Cell reselection for Satellite Access	NR Cell 1	NR Cell 11			
14.1.2	NR SA FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access	NR Cell 1	NR Cell 11			
14.1.3	NR SA FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access	NR Cell 1	NR Cell 11			
14.1.4	NR SA FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access	NR Cell 1	NR Cell 11			
14.1.5	NR SA FR1-FR1 Cell reselection for Satellite Access	NR Cell 1	NR Cell 23			
14.1.6	NR SA FR1-FR1 Cell Reselection for UE configured with the feature for enhanced requirements for Satellite Access	NR Cell 1	NR Cell 23			
14.1.7	NR SA FR1-FR1 Time-based Measurement Initiation Cell Reselection for Satellite Access	NR Cell 1	NR Cell 23			
14.1.8	NR SA FR1-FR1 Location-based Measurement Initiation Cell Reselection for Satellite Access	NR Cell 1	NR Cell 23			
14.1.9	NR SA FR1-FR1 Cell reselection for UE fulfilling low mobility relaxed measurement criterion for Satellite Access	NR Cell 1	NR Cell 23			
14.1.10	NR SA FR1-FR1 Cell reselection for UE fulfilling not-at-cell edge relaxed measurement criterion for Satellite Access	NR Cell 1	NR Cell 23			
14.2.1.1	NR SA FR1 Handover for Satellite Access	NR Cell 1	NR Cell 2			
14.2.1.2	NR SA FR1-FR1 Handover for Satellite Access	NR Cell 6	NR Cell 3			
14.2.1.3	NR SA FR1 Time-based Conditional Handover for NR Satellite Access	NR Cell 1	NR Cell 2			
14.2.1.4	SA FR1-FR1 SAN time-based conditional Handover for NR satellite access	NR Cell 6	NR Cell 3			
14.2.1.5	SA FR1 SAN distance-based conditional Handover for NR satellite access	NR Cell 1	NR Cell 2			
14.2.1.6	SA FR1-FR1 SAN distance-based conditional Handover for NR satellite access	NR Cell 6	NR Cell 3			
14.2.2.1.1	NR SA FR1 RRC Re-establishment for Satellite Access	NR Cell 1	NR Cell 2			
14.2.2.1.2	NR SA FR1-FR1 RRC Re-establishment for Satellite Access	NR Cell 6	NR Cell 3			
14.2.2.2.1	NR SA FR1 4-step contention based random access for Satellite Access	NR Cell 1				
14.2.2.2.2	NR SA FR1 4-step non-contention based random access for Satellite Access	NR Cell 1				
14.2.2.3.1	NR SA FR1-FR1 RRC connection release with redirection for Satellite Access	NR Cell 6	NR Cell 23			
14.3.1.1	NR SA FR1 UE transmit timing accuracy for Satellite Access	NR Cell 1				
14.3.2.1	NR SA FR1 timing advance adjustment accuracy for Satellite Access	NR Cell 1				
14.4.1.1	NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access	NR Cell 1				
14.4.1.2	NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access	NR Cell 1				
14.4.1.3	NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access	NR Cell 1				

14.4.1.4	NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access	NR Cell 1				
14.4.1.5	NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access	NR Cell 1				
14.4.1.6	NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access	NR Cell 1				
14.4.1.7	NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access	NR Cell 1				
14.4.1.8	NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access	NR Cell 1				
14.4.2.1	NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in non-DRX mode for Satellite Access	NR Cell 1				
14.4.2.2	NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in DRX mode for Satellite Access	NR Cell 1				
14.4.2.3	NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with CSI-RS-based BFD and LR in non-DRX mode for Satellite Access	NR Cell 1				
14.4.2.4	NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with CSI-RS-based BFD and LR in DRX mode for Satellite Access	NR Cell 1				
14.4.2.5	NR SA FR1 Beam Failure Detection and Link Recovery Test for SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode for Satellite Access	NR Cell 1	NR Cell 6			Intra-band
			NR Cell 10			Inter-band
14.4.2.6	NR SA FR1 Beam Failure Detection and Link Recovery Test for SCell configured with CSI-RS-based BFD and SSB-based LR in DRX mode for Satellite Access	NR Cell 1	NR Cell 6			Intra-band
			NR Cell 10			Inter-band
14.4.3.1.1	NR SA FR1 DCI-based DL active BWP switch with non-DRX for Satellite Access	NR Cell 1				
14.4.3.2.1	NR SA FR1 RRC-based DL active BWP switch with non-DRX for Satellite Access	NR Cell 1				
14.4.4.1	NR SA FR1 UE specific CBW change on PCell in non-DRX for Satellite Access	NR Cell 1				
14.4.5.1	NR SA FR1 MAC-CE based pathloss reference signal switch delay for Satellite Access	NR Cell 1				
14.5.1.1	SA FR1 event triggered reporting tests without gap under non-DRX for NR satellite access	NR Cell 1	NR Cell 2			
14.5.1.2	SA FR1 Event triggered reporting tests without gap under DRX for NR satellite access	NR Cell 1	NR Cell 2			
14.5.1.3	SA FR1 event triggered reporting tests without gap under non-DRX with FDD PCell with SSB index reading for NR satellite access	NR Cell 1	NR Cell 2			
14.5.1.4	SA FR1 event triggered reporting tests with single measurement gap under non-DRX for satellite access for NR satellite access	NR Cell 1	NR Cell 2			
14.5.1.5	SA FR1 event triggered reporting tests with FNO concurrent gaps under DRX for satellite access for NR satellite access	NR Cell 1	NR Cell 2			

14.5.1.6	SA FR1 event triggered reporting tests with PPO concurrent gaps under non-DRX with SSB index reading for satellite access for NR satellite access	NR Cell 1	NR Cell 2			
14.5.2.1	NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access	NR Cell 6	NR Cell 3			
14.5.2.2	NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access	NR Cell 6	NR Cell 3			
14.5.2.3	NR SA FR1-FR1 Event-triggered reporting with SSB time index detection when DRX is not used with single gap for satellite access	NR Cell 6	NR Cell 3			
14.5.2.4	NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access	NR Cell 6	NR Cell 3			
14.5.2.6	NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access	NR Cell 6	NR Cell 3			
14.5.2.7	NR SA FR1-FR1 Event triggered reporting without gap under non-DRX for Satellite Access	NR Cell 6	NR Cell 3			
14.5.2.8	NR SA FR1-FR1 Event triggered reporting without gap under DRX for Satellite Access	NR Cell 6	NR Cell 3			
14.5.3.1	NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for Satellite Access	NR Cell 1				
14.5.3.2	NR SA FR1 SSB based L1-RSRP measurement when DRX is used for Satellite Access	NR Cell 1				
14.5.3.3	NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for Satellite Access	NR Cell 1				
14.5.3.4	NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for Satellite Access	NR Cell 1				
14.6.1.1	NR SA FR1 SS-RSRP measurement accuracy for Satellite Access	NR Cell 1	NR Cell 2			
14.6.1.2	NR SA FR1-FR1 SS-RSRP measurement accuracy for Satellite Access	NR Cell 6	NR Cell 3			
14.6.2.1	NR SA FR1 SS-RSRQ measurement accuracy for Satellite Access	NR Cell 1	NR Cell 2			
14.6.2.2	NR SA FR1-FR1 SS-RSRQ measurement accuracy for Satellite Access	NR Cell 6	NR Cell 3			
14.6.3.1	NR SA FR1 SS-SINR Measurement Accuracy for Satellite Access	NR Cell 1	NR Cell 2			
14.6.3.2	NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access	NR Cell 6	NR Cell 3			
14.6.4.1	NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access	NR Cell 1				
14.6.4.2	NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access	NR Cell 1				
NOTE 1: Intra-frequency cells are selected such that serving and neighbour cells satisfy $(PCI_{neighbor} - PCI_{serving})\ mod\ 3 \neq 0$.						

E.13

E.14 Cell configuration mapping for SA FR1 test cases for RedCap in Chapter 16

Table E.14-1 defines the cell configuration mapping for NR/5GC FR1 test cases in chapter 16 of this test specification.

Table E.14-1: Cell configuration mapping for SA FR1 RRM testing for RedCap

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4
16.1.1.1	NR SA FR1 Cell reselection for 1 Rx UE	NR Cell 1	NR Cell 11		
16.1.1.2	NR SA FR1 Cell reselection for 2 Rx UE	NR Cell 1	NR Cell 11		
16.1.1.3	NR SA FR1-FR1 Cell reselection for 1 Rx UE	NR Cell 6	NR Cell 23		
16.1.1.4	NR SA FR1-FR1 Cell reselection for 2 Rx UE	NR Cell 6	NR Cell 23		
16.1.1.5	NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE	NR Cell 1	NR Cell 11		
16.1.1.6	NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	NR Cell 1	NR Cell 11		
16.1.1.7	NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE	NR Cell 6	NR Cell 23		
16.1.1.8	NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	NR Cell 6	NR Cell 23		
16.2.1.1	NR SA FR1 CG-SDT for 1 Rx UE	NR Cell 1			
16.2.1.2	NR SA FR1 CG-SDT for 2 Rx UE	NR Cell 1			
16.3.1.1	NR SA FR1 handover with known target cell for 1 Rx UE	NR Cell 1	NR Cell 2		
16.3.1.2	NR SA FR1 handover with known target cell for 2 Rx UE	NR Cell 1	NR Cell 2		
16.3.1.3	NR SA FR1 handover with unknown target cell for 1 Rx UE	NR Cell 1	NR Cell 2		
16.3.1.4	NR SA FR1 handover with unknown target cell for 2 Rx UE	NR Cell 1	NR Cell 2		
16.3.1.5	NR SA FR1-FR1 handover with unknown target cell for 1 Rx UE	NR Cell 6	NR Cell 3		
16.3.1.6	NR SA FR1-FR1 handover with unknown target cell for 2 Rx UE	NR Cell 6	NR Cell 3		
16.3.2.1.1	NR SA FR1 RRC Re-establishment for 1 Rx UE	NR Cell 1	NR Cell 2		
16.3.2.1.2	NR SA FR1 RRC Re-establishment for 2 Rx UE	NR Cell 1	NR Cell 2		
16.3.2.1.3	NR SA FR1-FR1 RRC Re-establishment for 1 Rx UE	NR Cell 6	NR Cell 3		
16.3.2.1.4	NR SA FR1-FR1 RRC Re-establishment for 2 Rx UE	NR Cell 6	NR Cell 3		
16.3.2.1.5	NR SA FR1 RRC Re-establishment for 1 Rx UE without serving cell timing	NR Cell 1	NR Cell 2		
16.3.2.1.6	NR SA FR1 RRC Re-establishment for 2 Rx UE without serving cell timing	NR Cell 1	NR Cell 2		
16.3.2.2.1	NR SA FR1 4-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE	Cell 1			
16.3.2.2.2	NR SA FR1 4-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE	Cell 1			
16.3.2.2.3	NR SA FR1 4-step RA type non-contention based random access test in FR1 for NR standalone for 1 Rx UE	Cell 1			

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4
16.3.2.2.4	NR SA FR1 4-step RA type non-contention based random access test in FR1 for NR standalone for 2 Rx UE	Cell 1			
16.3.2.2.5	NR SA FR1 2-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE	Cell 1			
16.3.2.2.6	NR SA FR1 2-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE	Cell 1			
16.3.2.2.7	NR SA FR1 2-step RA type non-contention based test in FR1 for NR standalone for 1 RX UE	Cell 1			
16.3.2.2.8	NR SA FR1 2-step RA type non-contention based test in FR1 for NR standalone for 2 RX UE	Cell 1			
16.3.2.3.1	NR SA FR1-FR1 RRC connection release with redirection for 1 Rx UE	NR Cell 6	NR Cell 23		
16.3.2.3.2	NR SA FR1-FR1 RRC connection release with redirection for 2 Rx UE	NR Cell 6	NR Cell 23		
16.4.1.1	NR SA FR1 NR UE Transmit Timing accuracy for 1 Rx UE	NR Cell 1			
16.4.1.2	NR SA FR1 NR UE Transmit Timing accuracy for 2 Rx UE	NR Cell 1			
16.4.3.1	NR SA FR1 timing advance adjustment accuracy for 1 Rx UE	NR Cell 1			
16.4.3.2	NR SA FR1 timing advance adjustment accuracy for 2 Rx UE	NR Cell 1			
16.5.1.1	NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE	NR Cell 1			
16.5.1.2	NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE	NR Cell 1			
16.5.1.3	NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE	NR Cell 1			
16.5.1.4	NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE	NR Cell 1			
16.5.1.5	NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE	NR Cell 1			
16.5.1.6	NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	NR Cell 1			
16.5.1.7	NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE	NR Cell 1			
16.5.1.8	NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	NR Cell 1			
16.5.1.9	NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE	NR Cell 1			
16.5.1.10	NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE	NR Cell 1			

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4
16.5.1.11	NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE	NR Cell 1			
16.5.1.12	NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE	NR Cell 1			
16.5.1.13	NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE	NR Cell 1			
16.5.1.14	NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE	NR Cell 1			
16.5.1.15	NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE	NR Cell 1			
16.5.1.16	NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE	NR Cell 1			
16.5.2.1	NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 1 Rx UE	NR Cell 1			
16.5.2.2	NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE	NR Cell 1			
16.5.2.3	NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 1 Rx UE	NR Cell 1			
16.5.2.4	NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE	NR Cell 1			
16.5.2.5	NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 1 Rx UE	NR Cell 1			
16.5.2.6	NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE	NR Cell 1			
16.5.2.7	NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 1 Rx UE	NR Cell 1			
16.5.2.8	NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE	NR Cell 1			
16.5.3.1.1	NR SA FR1 DCI-based DL active BWP switch in non-DRX for 1 Rx UE	NR Cell 1			
16.5.3.1.2	NR SA FR1 DCI-based DL active BWP switch in non-DRX for 2 Rx UE	NR Cell 1			
16.5.3.2.1	NR SA FR1 RRC-based DL active BWP switch in non-DRX for 1 Rx UE	NR Cell 1			
16.5.3.2.2	NR SA FR1 RRC-based DL active BWP switch in non-DRX for 2 Rx UE	NR Cell 1			
16.5.4.1	NR SA FR1 UE specific CBW change on PCell in non-DRX for 1 Rx UE	NR Cell 1			
16.5.4.2	NR SA FR1 UE specific CBW change on PCell in non-DRX for 2 Rx UE	NR Cell 1			

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4
16.6.1.1	NR SA FR1 Event triggered reporting tests without gap under non-DRX for 1 Rx UE	NR Cell 1	NR Cell 2		
16.6.1.2	NR SA FR1 Event triggered reporting tests without gap under non-DRX for 2 Rx UE	NR Cell 1	NR Cell 2		
16.6.1.3	NR SA FR1 Event triggered reporting tests without gap under DRX for 1 Rx UE	NR Cell 1	NR Cell 2		
16.6.1.4	NR SA FR1 Event triggered reporting tests without gap under DRX for 2 Rx UE	NR Cell 1	NR Cell 2		
16.6.1.5	NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX for 1 Rx UE	NR Cell 1	NR Cell 2		
16.6.1.6	NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX for 2 Rx UE	NR Cell 1	NR Cell 2		
16.6.1.7	NR SA FR1 Event triggered reporting tests with per-UE gaps under DRX for 1 Rx UE	NR Cell 1	NR Cell 2		
16.6.1.8	NR SA FR1 Event triggered reporting tests with per-UE gaps under DRX for 2 Rx UE	NR Cell 1	NR Cell 2		
16.6.1.9	NR SA FR1 Event triggered reporting tests without gap under non-DRX with SSB index reading for 1 Rx UE	NR Cell 1	NR Cell 2		
16.6.1.10	NR SA FR1 Event triggered reporting tests without gap under non-DRX with SSB index reading for 2 Rx UE	NR Cell 1	NR Cell 2		
16.6.1.11	NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 1 Rx UE	NR Cell 1	NR Cell 2		
16.6.1.12	NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 2 Rx UE	NR Cell 1	NR Cell 2		
16.6.2.1	NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE	NR Cell 6	NR Cell 3		
16.6.2.2	NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE	NR Cell 6	NR Cell 3		
16.6.2.3	NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used for 1 Rx UE	NR Cell 6	NR Cell 3		
16.6.2.4	NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used for 2 Rx UE	NR Cell 6	NR Cell 3		
16.6.2.5	NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 1 Rx UE	NR Cell 6	NR Cell 3		
16.6.2.6	NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 2 Rx UE	NR Cell 6	NR Cell 3		
16.6.2.7	NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 1 Rx UE	NR Cell 6	NR Cell 3		
16.6.2.8	NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 2 Rx UE	NR Cell 6	NR Cell 3		
16.6.2.9	NR SA FR1-FR1 Event triggered reporting tests with additional mandatory gap pattern for 1 Rx UE	NR Cell 6	NR Cell 3		
16.6.2.10	NR SA FR1-FR1 Event triggered reporting tests with additional mandatory gap pattern for 2 Rx UE	NR Cell 6	NR Cell 3		
16.6.2.11	NR SA FR1-FR1 Event triggered reporting tests for FR1 when DRX is used for 1 Rx UE	NR Cell 6	NR Cell 3		
16.6.2.12	NR SA FR1-FR1 Event triggered reporting tests for FR1 when DRX is used for 2 Rx UE	NR Cell 6	NR Cell 3		

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4
16.6.4.1	NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for 1 Rx UE	NR Cell 1			
16.6.4.2	NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for 2 Rx UE	NR Cell 1			
16.6.4.3	NR SA FR1 SSB based L1-RSRP measurement when DRX is used for 1 Rx UE	NR Cell 1			
16.6.4.4	NR SA FR1 SSB based L1-RSRP measurement when DRX is used for 2 Rx UE	NR Cell 1			
16.6.4.5	NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for 1 Rx UE	NR Cell 1			
16.6.4.6	NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for 2 Rx UE	NR Cell 1			
16.6.4.7	NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for 1 Rx UE	NR Cell 1			
16.6.4.8	NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for 2 Rx UE	NR Cell 1			
16.6.5.1	NR SA FR1 CGI identification of NR neighbour cell for 1 Rx UE	NR Cell 1	NR Cell 2		
16.6.5.2	NR SA FR1 CGI identification of NR neighbour cell for 2 Rx UE	NR Cell 1	NR Cell 2		
16.7.1.1.1	NR SA FR1 SS-RSRP absolute measurement accuracy for 1 Rx UE	NR Cell 489	NR Cell 1		
16.7.1.1.2	NR SA FR1 SS-RSRP relative measurement accuracy for 1 Rx UE	NR Cell 489	NR Cell 1		
16.7.1.2.1	NR SA FR1 SS-RSRP absolute measurement accuracy for 2 Rx UE	NR Cell 489	NR Cell 1		
16.7.1.2.2	NR SA FR1 SS-RSRP relative measurement accuracy for 2 Rx UE	NR Cell 489	NR Cell 1		
16.7.1.3.1	NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for 1 Rx UE	NR Cell 6	NR Cell 3		
16.7.1.3.2	NR SA FR1-FR1 SS-RSRP relative measurement accuracy for 1 Rx UE	NR Cell 6	NR Cell 3		
16.7.1.4.1	NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for 2 Rx UE	NR Cell 6	NR Cell 3		
16.7.1.4.2	NR SA FR1-FR1 SS-RSRP relative measurement accuracy for 2 Rx UE	NR Cell 6	NR Cell 3		
16.7.2.1	NR SA FR1 SS-RSRQ absolute measurement accuracy for 1 Rx UE	NR Cell 1	NR Cell 2		
16.7.2.2	NR SA FR1 SS-RSRQ absolute measurement accuracy for 2 Rx UE	NR Cell 1	NR Cell 2		
16.7.2.3.1	NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for 1 Rx UE	NR Cell 6	NR Cell 3		
16.7.2.3.2	NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for 1 Rx UE	NR Cell 6	NR Cell 3		
16.7.2.4.1	NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for 2 Rx UE	NR Cell 6	NR Cell 3		
16.7.2.4.2	NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for 2 Rx UE	NR Cell 6	NR Cell 3		
16.7.3.1	NR SA FR1 SS-SINR absolute measurement accuracy for 1 Rx UE	NR Cell 1	NR Cell 2		
16.7.3.2	NR SA FR1 SS-SINR absolute measurement accuracy for 2 Rx UE	NR Cell 1	NR Cell 2		
16.7.3.3.1	NR SA FR1-FR1 SS-SINR absolute measurement accuracy for 1 Rx UE	NR Cell 6	NR Cell 3		
16.7.3.3.2	NR SA FR1-FR1 SS-SINR relative measurement accuracy for 1 Rx UE	NR Cell 6	NR Cell 3		

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4
16.7.3.4.1	NR SA FR1-FR1 SS-SINR absolute measurement accuracy for 2 Rx UE	NR Cell 6	NR Cell 3		
16.7.3.4.2	NR SA FR1-FR1 SS-SINR relative measurement accuracy for 2 Rx UE	NR Cell 6	NR Cell 3		
16.7.4.1.1	NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for 1 Rx UE	NR Cell 1			
16.7.4.1.2	NR SA FR1 SSB based L1-RSRP relative measurement accuracy for 1 Rx UE	NR Cell 1			
16.7.4.2.1	NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for 2 Rx UE	NR Cell 1			
16.7.4.2.2	NR SA FR1 SSB based L1-RSRP relative measurement accuracy for 2 Rx UE	NR Cell 1			
16.7.4.3.1	NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for 1 Rx UE	NR Cell 1			
16.7.4.3.2	NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for 1 Rx UE	NR Cell 1			
16.7.4.4.1	NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for 2 Rx UE	NR Cell 1			
16.7.4.4.2	NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for 2 Rx UE	NR Cell 1			

Table E.14-2 defines the cell configuration mapping for NR/5GC FR1 – E-UTRA Inter-RAT test cases (serving cell in NR) for RedCap in chapter 16 of this test specification.

Table E.14-2: Cell configuration mapping for SA FR1 – E-UTRA Inter-RAT RRM testing for RedCap

TC	Description	38.533 NR Cell1	38.533 LTE Cell2	38.533 LTE Cell3	38.533 LTE Cell4	CA Type
16.1.2.1	NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 1 RX UE	NR Cell 1	LTE Cell 1			
16.1.2.2	NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 2 RX UE	NR Cell 1	LTE Cell 1			
16.1.2.3	NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 1 RX UE	NR Cell 1	LTE Cell 1			
16.1.2.4	NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 2 RX UE	NR Cell 1	LTE Cell 1			
16.1.2.5	NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE	NR Cell 1	LTE Cell 1			
16.1.2.6	NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	NR Cell 1	LTE Cell 1			
16.3.1.7	NR SA FR1 - E-UTRA handover with known target cell for 1 Rx UE	NR Cell 1	LTE Cell 1			
16.3.1.8	NR SA FR1 - E-UTRA handover with known target cell for 2 Rx UE	NR Cell 1	LTE Cell 1			
16.3.1.9	NR SA FR1 - E-UTRA handover with unknown target cell for 1 Rx UE	NR Cell 1	LTE Cell 1			
16.3.1.10	NR SA FR1 - E-UTRA handover with unknown target cell for 2 Rx UE	NR Cell 1	LTE Cell 1			
16.3.2.3.3	NR SA FR1 - E-UTRA RRC connection release with redirection for 1 Rx UE	NR Cell 1	LTE Cell 1			
16.3.2.3.4	NR SA FR1 - E-UTRA RRC connection release with redirection for 2 Rx UE	NR Cell 1	LTE Cell 1			
16.6.3.1	NR - E-UTRA event-triggered reporting in non-DRX for 1 Rx UE	NR Cell 1	LTE Cell 1			
16.6.3.2	NR - E-UTRA event-triggered reporting in non-DRX for 2 Rx UE	NR Cell 1	LTE Cell 1			
16.6.3.3	NR - E-UTRA event-triggered reporting in DRX for 1 Rx UE	NR Cell 1	LTE Cell 1			

TC	Description	38.533 NR Cell1	38.533 LTE Cell2	38.533 LTE Cell3	38.533 LTE Cell4	CA Type
16.6.3.4	NR - E-UTRA event-triggered reporting in DRX for 2 Rx UE	NR Cell 1	LTE Cell 1			
16.6.5.3	NR SA FR1 - E-UTRA CGI Identification of E-UTRA cell for 1 Rx UE	NR Cell 1	LTE Cell 1			
16.6.5.4	NR SA FR1 - E-UTRA CGI Identification of E-UTRA cell for 2 Rx UE	NR Cell 1	LTE Cell 1			
16.7.5.1	NR SA FR1 - E-UTRA RSRP absolute measurement accuracy for 1 Rx UE	NR Cell 1	LTE Cell 1			
16.7.5.2	NR SA FR1 - E-UTRA RSRP absolute measurement accuracy for 2 Rx UE	NR Cell 1	LTE Cell 1			
16.7.6.1	NR SA FR1 - E-UTRA RSRQ absolute measurement accuracy for 1 Rx UE	NR Cell 1	LTE Cell 1			
16.7.6.2	NR SA FR1 - E-UTRA RSRQ absolute measurement accuracy for 2 Rx UE	NR Cell 1	LTE Cell 1			

E.15 Cell configuration mapping for SA FR2 test cases for RedCap in Chapter 17

Table E.15-1 defines the cell configuration mapping for NR/5GC FR2 test cases in chapter 17 of this test specification.

Table E.15-1: Cell configuration mapping for SA FR2 RRM testing for RedCap

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
17.1.1.1	NR SA FR2 Cell reselection for 2 Rx UE	NR Cell 1	NR Cell 11			
17.1.1.2	NR SA FR2-FR2 Cell reselection for 2 Rx UE	NR Cell 6	NR Cell 23			
17.1.1.3	NR SA FR2 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	NR Cell 1	NR Cell 11			
17.1.1.4	NR SA FR2-FR2 Cell reselection for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE	NR Cell 6	NR Cell 23			
17.2.1.1	NR SA FR2 TA validation for CG-SDT for 2 Rx UE	NR Cell 1				
17.3.1.1	NR SA FR2 handover with unknown target cell for 2 Rx	NR Cell 1	NR Cell 2			
17.3.1.2	NR SA FR2-FR2 handover with unknown target cell for 2 Rx UE	NR Cell 6	NR Cell 3			
17.3.2.1.1	NR SA FR2 Intra-frequency RRC Re-establishment in FR2	NR Cell 1				
17.3.2.1.2	NR SA FR2-FR2 Inter-frequency RRC Re-establishment in FR2	NR Cell 1				
17.3.2.1.3	NR SA FR2 RRC re-establishment without serving cell timing	NR Cell 1	NR Cell 2			
17.3.2.2.1	NR SA FR2 4-step RA type contention based random access for 2 Rx UE	NR Cell 1				
17.3.2.2.2	NR SA FR2 4-step RA type non-contention based random access for 2 Rx UE	NR Cell 1				
17.3.2.2.3	NR SA FR2 2-step RA type contention based random access for 2 Rx UE	NR Cell 1				
17.3.2.2.4	NR SA FR2 2-step RA type non-contention based random access for 2 Rx UE	NR Cell 1				
17.3.2.3.1	NR SA FR2-FR2 RRC connection release with redirection for 2 Rx UE	NR Cell 6	NR Cell 3			
17.4.1.1	NR SA FR2 NR UE Transmit Timing accuracy for 2 Rx UE	NR Cell 1				
17.4.3.1	NR SA FR2 timing advance adjustment accuracy for 2 Rx UE	NR Cell 1				
17.5.1.1	NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with	NR Cell 1				

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
	SSB-based RLM RS in non-DRX mode for 2 Rx UE					
17.5.1.2	NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE	NR Cell 1				
17.5.1.3	NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	NR Cell 1				
17.5.1.4	NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	NR Cell 1				
17.5.1.5	NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE	NR Cell 1				
17.5.1.6	NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE	NR Cell 1				
17.5.1.7	NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE	NR Cell 1				
17.5.1.8	NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE	NR Cell 1				
17.5.1.9	NR SA FR2 Radio Link Monitoring Scheduling Restrictions on FR2 for 2 Rx UE	NR Cell 1				
17.5.2.1	NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE	NR Cell 1				
17.5.2.2	NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE	NR Cell 1				
17.5.2.3	NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE	NR Cell 1				
17.5.2.4	NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE	NR Cell 1				
17.5.2.5	NR SA FR2 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE	NR Cell 1				
17.5.3.1.1	NR SA FR2 DCI-based and Timer-based DL active BWP switch for 2 Rx UE	NR Cell 1				
17.5.3.2.1	NR SA FR2 RRC-based DL active BWP switch for 2 Rx UE	NR Cell 1				
17.5.4.1.1	NR SA FR2 MAC-CE based active TCI state switch for a known TCI state for 2 Rx UE	NR Cell 1				
17.5.4.2.1	NR SA FR2 RRC-CE based active TCI state switch for a known TCI state for 2 Rx UE	NR Cell 1				
17.5.5.1.1	NR SA FR2 MAC-CE based spatial relation switch associated with known DL-RS for 2 Rx UE	NR Cell 1				
17.5.5.2.1	NR SA FR2 RRC-based spatial relation switch associated with a known DL-RS for 2 Rx UE	NR Cell 1				

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
17.5.6.1	NR SA FR2 UE specific CBW change on PCell for 2 Rx UE	NR Cell 1				
17.6.1.1	NR SA FR2 event triggered reporting without gap in non-DRX for 2 Rx UE	NR Cell 1	NR Cell 2			
17.6.1.2	NR SA FR2 event triggered reporting without gap in DRX for 2 Rx UE	NR Cell 1	NR Cell 2			
17.6.1.3	NR SA FR2 event triggered reporting with gap in non-DRX for 2 Rx UE	NR Cell 1	NR Cell 2			
17.6.1.4	NR SA FR2 event triggered reporting with gap in DRX for 2 Rx UE	NR Cell 1	NR Cell 2			
17.6.2.1	NR SA FR2-FR2 event triggered reporting in non-DRX for 2 Rx UE	NR Cell 6	NR Cell 3			
17.6.2.2	NR SA FR2-FR2 event triggered reporting in DRX for 2 Rx UE	NR Cell 6	NR Cell 3			
17.6.2.3	NR SA FR2-FR2 event triggered reporting with SSB time index detection in non-DRX for 2 Rx UE	NR Cell 6	NR Cell 3			
17.6.2.4	NR SA FR2-FR2 event triggered reporting with SSB time index detection in DRX for 2 Rx UE	NR Cell 6	NR Cell 3			
17.6.3.1	NR SA FR2 SSB based L1-R SRP measurement in non-DRX for 2 Rx UE	NR Cell 1				
17.6.3.2	NR SA FR2 SSB based L1-RSRP measurement in DRX for 2 Rx UE	NR Cell 1				
17.6.3.3	NR SA FR2 CSI-RS based L1-RSRP measurement in non-DRX for 2 Rx UE	NR Cell 1				
17.6.3.4	NR SA FR2 CSI-RS based L1-RSRP measurement in DRX for 2 Rx UE	NR Cell 1				
17.6.4.1	NR SA FR2-FR2 CGI identification of NR neighbour cell for 2 Rx UE	NR Cell 6	NR Cell 3			
17.7.1.1	NR SA FR2 SS-RSRP measurement accuracy for 2 Rx UE	NR Cell 1				
17.7.1.2	NR SA FR2-FR2 SS-RSRP measurement accuracy for 2 Rx UE	NR Cell 6	NR Cell 3			
17.7.2.1	NR SA FR2 SS-RSRQ measurement accuracy for 2 Rx UE	NR Cell 1				
17.7.2.2	NR SA FR2-FR2 SS-RSRQ measurement accuracy for 2 Rx UE	NR Cell 6	NR Cell 3			
17.7.3.1	NR SA FR2 SSB based L1-RSRP measurement accuracy for 2 Rx UE	NR Cell 1				
17.7.3.2	NR SA FR2 CSI-RS based L1-RSRP measurement accuracy for 2 Rx UE	NR Cell 1				
17.7.4.1	NR SA FR2 SS-SINR measurement accuracy for 2 Rx UE	NR Cell 1				
17.7.4.2	NR SA FR2-FR2 SS-SINR measurement accuracy for 2 Rx UE	NR Cell 6	NR Cell 3			

E.16 Cell configuration mapping for E-UTRAN – SA test cases for RedCap in Chapter 18

Table E.16-1 defines the cell configuration mapping for E-UTRAN - NR/5GC FR1 Inter-RAT test cases for RedCap (serving cell in LTE) in chapter 18 of this test specification.

Table E.16-1: Cell configuration mapping for E-UTRA – SA FR1 Inter-RAT RRM testing for RedCap

TC	Description	38.533 LTE Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
18.1.1.1	E-UTRA - NR SA FR1 E-UTRA cell re-selection to higher priority NR target Cell for 2 Rx UE	LTE Cell 1	NR Cell 1			
18.2.1.1	E-UTRA - NR SA FR1 handover for 2 Rx UE	LTE Cell 1	NR Cell 1			
18.2.2.1	E-UTRA - NR SA FR1 RRC connection release with redirection for 2 Rx UE	LTE Cell 1	NR Cell 1			
18.3.1.1	E-UTRA - NR SA FR1 event triggered reporting without SSB time index detection in non-DRX	LTE Cell 1	NR Cell 1			
18.3.1.2	E-UTRA - NR SA FR1 event triggered reporting without SSB time index detection in DRX	LTE Cell 1	NR Cell 1			
18.3.1.3	E-UTRA - NR SA FR1 event triggered reporting with SSB time index detection in non-DRX	LTE Cell 1	NR Cell 1			
18.3.1.4	E-UTRA - NR SA FR1 event triggered reporting with SSB time index detection in DRX	LTE Cell 1	NR Cell 1			
18.3.1.5	E-UTRA - NR SA FR2 event triggered reporting without SSB time index detection in non-DRX	LTE Cell 1	NR Cell 1			
18.3.1.6	E-UTRA - NR SA FR2 event triggered reporting without SSB time index detection in DRX	LTE Cell 1	NR Cell 1			
18.3.1.7	E-UTRA - NR SA FR2 event triggered reporting with SSB time index detection in non-DRX	LTE Cell 1	NR Cell 1			
18.3.1.8	E-UTRA - NR SA FR2 event triggered reporting with SSB time index detection in DRX	LTE Cell 1	NR Cell 1			

E.17 Cell configuration mapping for SA FR1 test cases for ATG in Chapter 19

Table E.17-1 defines the cell configuration mapping for NR/5GC FR1 test cases for ATG in chapter 19 of this test specification.

Table E.17-1: Cell configuration mapping for SA FR1 RRM testing for ATG

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
19.2.1.1	Intra-frequency handover from FR1 to FR1; known target cell	NR Cell 1	NR Cell 2			
19.2.1.2	Inter-frequency handover from FR1 to FR1; unknown target cell	NR Cell 6	NR Cell 3			
19.2.2.1	Intra-frequency distance-based conditional Handover from FR1 to FR1	NR Cell 1	NR Cell 2			
19.2.2.2	Inter-frequency distance-based conditional Handover from FR1 to FR1	NR Cell 6	NR Cell 3			
19.4.1.1	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode	NR Cell 1				
19.4.1.2	Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode	NR Cell 1				
19.4.1.3	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode	NR Cell 1				
19.4.1.4	Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode	NR Cell 1				

TC	Description	38.533 NR Cell1	38.533 NR Cell2	38.533 NR Cell3	38.533 NR Cell4	CA Type
19.6.1.1.1	NR SA FR1 SS-RSRP absolute measurement accuracy for ATG	NR Cell 489	NR Cell 1			
19.6.1.1.2	NR SA FR1 SS-RSRP relative measurement accuracy for ATG	NR Cell 489	NR Cell 1			
19.6.1.2.1	NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for ATG	NR Cell 6	NR Cell 3			
19.6.1.2.2	NR SA FR1-FR1 SS-RSRP relative measurement accuracy for ATG	NR Cell 6	NR Cell 3			
19.6.2.1	NR SA FR1 SS-RSRQ absolute measurement accuracy for ATG	NR Cell 1	NR Cell 2			
19.6.2.2.1	NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for ATG	NR Cell 6	NR Cell 3			
19.6.2.2.2	NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for ATG	NR Cell 6	NR Cell 3			
19.6.3.1	NR SA FR1 SS-SINR absolute measurement accuracy for ATG	NR Cell 1	NR Cell 2			
19.6.3.2.1	NR SA FR1-FR1 SS-SINR absolute measurement accuracy for ATG	NR Cell 6	NR Cell 3			
19.6.3.2.2	NR SA FR1-FR1 SS-SINR relative measurement accuracy for ATG	NR Cell 6	NR Cell 3			
19.6.4.1.1	NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for ATG	NR Cell 1				
19.6.4.1.2	NR SA FR1 SSB based L1-RSRP relative measurement accuracy for ATG	NR Cell 1				
19.6.4.2.1	NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for ATG	NR Cell 1				
19.6.4.2.2	NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for ATG	NR Cell 1				
19.6.5.1.1	NR SA FR1 L1-SINR absolute measurement accuracy with CSI-RS based CMR and no dedicated IMR for ATG	NR Cell 1				
19.6.5.1.2	NR SA FR1 L1-SINR relative measurement accuracy with CSI-RS based CMR and no dedicated IMR for ATG	NR Cell 1				
19.6.5.2	NR SA FR1 L1-SINR absolute measurement accuracy with SSB based CMR and dedicated IMR for ATG	NR Cell 1				
19.6.5.3.1	NR SA FR1 L1-SINR absolute measurement accuracy with CSI-RS based CMR and dedicated IMR for ATG	NR Cell 1				
19.6.5.3.2	NR SA FR1 L1-SINR relative measurement accuracy with CSI-RS based CMR and dedicated IMR for ATG	NR Cell 1				

Annex F (normative): Measurement uncertainties and test tolerances

The requirements of this clause apply to all tests in the present document.

F.1 Measurement uncertainties and test tolerances for FR1 and FR2

F.1.1 Acceptable uncertainty of test system (normative)

See TS 38.521-1 [17] annex F.1.

F.1.1.1 Measurement of test environments

See TS 38.521-1 [17] Annex F1.1.

F.1.1.2 Measurement of RRM requirements

This clause defines the maximum test system uncertainty for the RRM requirements. The maximum uncertainty values allowed for the typical RRM measurement uncertainty contributors is defined in Table F.1.1.2-1 and Table F.1.1.2-2. Unless explicitly stated for a particular test case, these maximum uncertainty values should be used as starting point to perform the test tolerance analysis in TR 38.903 [22] for each of the test cases. Specific test cases might require a tighter measurement uncertainty value for some of the contributors. Exceptions to the general values in Table F.1.1.2-1 and Table F.1.1.2-2 shall be handled case by case.

Table F.1.1.2-1: Maximum allowed measurement uncertainty values for the test system for FR1 (up to 6 GHz) and Cell BW ≤ 40 MHz

MU contributor	Unit	Value	Comment
AWGN absolute power, N_{oc} averaged over BW_{Config}	dB	±1.5	
AWGN absolute power, N_{oc} for Measurement PRB	dB	±1.5	Measurement PRB may be for example #RB_J to RB_{J+19} for SSB-based, or selected RBs in the range #RB_0 to RB_{105} for CSI-RS-based, or configured RBs in the SRS resource for CLI-based
Ratio of cell X signal / AWGN, $\hat{E}s_X$ / N_{oc} averaged over BW_{Config}	dB	±0.3	Same as in LTE
Ratio of cell X signal / AWGN, $\hat{E}s_X$ / N_{oc} for Measurement PRB	dB	±0.3	Measurement PRB may be for example #RB_J to RB_{J+19} for SSB-based, or selected RBs in the range #RB_0 to RB_{105} for CSI-RS-based, or configured RBs in the SRS resource for CLI-based
Fading profile uncertainty	dB	±0.5 for 1 Tx ±0.7 for 2 Tx	Depends on fading profile, can be referenced from TS 38.101-4 [20]
AWGN and signal flatness*	dB	±2.0	Same as in LTE, can be referenced from TS 38.101-4 [20]
Uplink absolute power measurement	dB	±1.5	Same as in TS 38.521-1 [17]
Uplink relative power measurement	dB	±0.7	Same as in TS 38.521-1 [17]
Uplink signal transmit timing relative to downlink	Tc	±112	
Relative transmit timing accuracy during UE timing adjustment	Tc	±88	
Timing Advance Adjustment accuracy	Tc	±88	

MU contributor	Unit	Value	Comment
Note 1: The values in this table are specified per cell. Multi-cell test cases need to combined these values in the TT analysis in TR 38.903 Note 2:These values apply for cell BW ≤ 40 MHz. The maximum allowed measurement uncertainty for higher cell BW is FFS. Note 3: Void			

Table F.1.1.2-2: Maximum allowed measurement uncertainty values for the test system for FR2 (up to 40GHz) and Cell BW ≤ 400 MHz

MU contributor	Unit	Value	Comment
AWGN absolute power, N_{oc} averaged over BW_{Config}	dB	PC3: ±5.65[4,5] PC1: 5.65[4,5]	
AWGN absolute power, N_{oc} for Measurement PRB	dB	PC3: ±5.65[4,5] PC1: 5.65[4,5]	Measurement PRB may be for example #RB_J to RB_{J+19} for SSB-based, or selected RBs in the range #RB_0 to RB_{274} for CSI-RS-based, or configured RBs in the SRS resource for CLI-based
Ratio of cell X signal / AWGN, $\hat{E}s_x$ / N_{oc} averaged over BW_{Config}	dB	±0.3	
Ratio of cell X signal / AWGN, $\hat{E}s_x$ / N_{oc} for Measurement PRB	dB	±0.3	Measurement PRB may be for example #RB_J to RB_{J+19} for SSB-based, or selected RBs in the range #RB_0 to RB_{274} for CSI-RS-based, or configured RBs in the SRS resource for CLI-based
$\hat{E}s_x$[Note 3] absolute power, N_{oc} averaged over BW_{Config}	dB	PC3: ±5.65[4,5] PC1: 5.65[4,5]	
$\hat{E}s_x$[Note 3] absolute power, N_{oc} for Measurement PRB	dB	PC3: ±5.65[4,5] PC1: 5.65[4,5]	Measurement PRB may be for example #RB_J to RB_{J+19} for SSB-based, or selected RBs in the range #RB_0 to RB_{274} for CSI-RS-based, or configured RBs in the SRS resource for CLI-based
Relative power between any two $\hat{E}s$ levels at the same frequency	dB	±2.0	
Fading profile uncertainty	dB	±0.5 for 1 Tx ±0.7 for 2 Tx	
AWGN and signal flatness*	dB	±3.6	Same as in Demod Performance test cases, can be referenced from TS 38.521-4 [20]
Uplink absolute power measurement	dB	TBD	
Uplink relative power measurement	dB	TBD	
Uplink signal transmit timing relative to downlink	Tc	±48	
Relative transmit timing during UE timing adjustment	Tc	±40	
Timing Advance Adjustment	Tc	±40	
NOTE 1: The values in this table are specified per cell. Multi-cell test cases need to combine these values in the TT analysis in TR 38.903 NOTE 2: These values apply for cell BW ≤ 400 MHz. The maximum allowed measurement uncertainty for higher cell BW is FFS. NOTE 3: Applies for test cases that use $\hat{E}s$ without AWGN NOTE 4: Total Expanded MU for IFF for Max device size ≤ 30cm in TR 38.903 [22] Table E.3.1.3-2 for PC3 UEs and in Table E.3.1.3-3 for PC1 UEs. NOTE 5: If the TT analysis for a specific test case based on this MU value results in an unsolvable conflict, making the test case untestable, even after the alternative solutions listed in TR 38.903 [22] clause A.4 have been considered for the test case in TS 38.133 [6] Annex A, the TT analysis shall be repeated using a lower MU value, taking into account the values defined in clause E.3.1 TR 38.903 [22]. The test case will be applicable for the subset of the test systems meeting this reduced MU Threshold.			

The maximum test system uncertainty for the EN-DC FR1 test cases in chapter 4 is defined in Table F.1.1.2-3.

The maximum test system uncertainty for the NE-DC FR1 test cases in chapter 4 is defined in Table F.1.1.2-3a.

The maximum test system uncertainty for the NR/5GC FR1 test cases in chapter 6 is defined in Table F.1.1.2-4.

The maximum test system uncertainty for the EN-DC FR2 test cases in chapter 5 is defined in Table F.1.1.2-5.

The maximum test system uncertainty for the NR/5GC FR2 test cases in chapter 7 is defined in Table F.1.1.2-6.

The maximum test system uncertainty for the E-UTRA – NR inter-RAT with E-UTRA serving cell test cases in chapter 8 is defined in Table F.1.1.2-7.

The maximum test system uncertainty for the FR1 NR sidelink test cases in chapter 9 is defined in Table F.1.1.2-8.

The maximum test system uncertainty for the EN-DC FR1 test cases for shared spectrum in chapter 10 is defined in Table F.1.1.2-12.

The maximum test system uncertainty for the NR/5GC FR1 test cases for shared spectrum in chapter 11 is defined in Table F.1.1.2-13.

The maximum test system uncertainty for the E-UTRA – NR inter-RAT with E-UTRA serving cell test cases for shared spectrum in chapter 12 is defined in Table F.1.1.2-14.

The maximum test system uncertainty for the NR/5GC FR1 test cases with SCell in shared spectrum in chapter 13 is defined in Table F.1.1.2-15.

The maximum test system uncertainty for SA FR1 Satellite access test cases in chapter 14 is defined in Table F.1.1.2-16.

The maximum test system uncertainty for the NR/5GC FR1 test cases for RedCap in chapter 16 is defined in Table F.1.1.2-9.

The maximum test system uncertainty for the NR/5GC FR2 test cases for RedCap in chapter 17 is defined in Table F.1.1.2-10.

The maximum test system uncertainty for the E-UTRA – NR inter-RAT with E-UTRA serving cell test cases for RedCap in chapter 18 is defined in Table F.1.1.2-11.

Table F.1.1.2-3: Maximum test system uncertainty for RRM requirements for EN-DC FR1 test cases

Subclause	Maximum Test System Uncertainty[1]	Derivation of Test System Uncertainty
4.3.2.2.1 Contention based random access test in FR1 for PSCell in EN-DC	Noc ±1.5 dB $\hat{E}_{s2}$ / Noc ±0.3 dB Uplink absolute power measurement ±1.5 dB Uplink relative power measurement ±0.7 dB ±112T_c Uplink signal transmit timing relative to downlink	$\hat{E}_{s2}$ / N_{oc} is the ratio of cell 2 signal / AWGN T_c = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
4.3.2.2.2 Non-contention based random access test in FR1 for PSCell in EN-DC	Same as 4.3.2.2.1	Same as 4.3.2.2.1
4.3.2.2.3 EN-DC FR1 2-step contention based random access	Same as 4.3.2.2.1	Same as 4.3.2.2.1
4.3.2.2.4 EN-DC FR1 2-step non-contention based random access	Same as 4.3.2.2.1	Same as 4.3.2.2.1

4.4.1.1 EN-DC FR1 UE transmit timing accuracy	Noc ±1.5 dB $\hat{E}s_2$ / N_{oc} ±0.3 dB ±112Tc Uplink signal transmit timing relative to downlink	$\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN Tc = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
4.4.3.1 EN-DC FR1 timing advance adjustment accuracy	Noc ±1.5 dB $\hat{E}s_2$ / N_{oc} ±0.3 dB ±88T_c Timing Advance Adjustment accuracy	$\hat{E}s_2$ / N_{oc} is the ratio of cell 2 signal / AWGN T_c = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
4.5.1.1 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	Average Noc_2 ±1.5 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB Fading profile ±0.7 dB	Note: Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_2$ / Noc_2 is the SNR Meas PRB are the measurement PRB for SSB-based RLM #RB_J to RB_{J+19}
4.5.1.2 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	Same as 4.5.1.1	Same as 4.5.1.1
4.5.1.3 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode	Same as 4.5.1.1	Same as 4.5.1.1
4.5.1.4 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode	Same as 4.5.1.1	Same as 4.5.1.1
4.5.1.5 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	Same as 4.5.1.1	Same as 4.5.1.1
4.5.1.6 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	Same as 4.5.1.1	Same as 4.5.1.1
4.5.1.7 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	Same as 4.5.1.1	Same as 4.5.1.1
4.5.1.8 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	Same as 4.5.1.1	Same as 4.5.1.1
4.5.1.9 EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion	Same as 4.5.1.1	Same as 4.5.1.1
4.5.2.1 EN-DC FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC	± 0.6dB (AWGN conditions)	Overall system uncertainty for AWGN condition comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty 2 + (0.25 x AWGN flatness and signal flatness) 2) Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±2.0 dB
4.5.2.2 EN-DC FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC	Same as 4.5.2.1	Same as 4.5.2.1

4.5.2.3 EN-DC FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC	Noc_2 ±1.5 dB Noc_3 ±1.5 dB $\hat{E}s_2$ / Noc_2 ±0.3 dB $\hat{E}s_3$ / Noc_3 ±0.3 dB	Note: $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN $\hat{E}s_3$ / Noc_3 is the ratio of cell 3 signal / AWGN
4.5.2.4 EN-DC FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC	Same as 4.5.2.3	Same as 4.5.2.3
4.5.2.5 EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC	Noc_1 ±1.5 dB Noc_2 ±1.5 dB Noc_3 ±1.5 dB $\hat{E}s_1$ / Noc ±0.3 dB $\hat{E}s_2$ / Noc ±0.3 dB $\hat{E}s_3$ / Noc ±0.3 dB	Note: Noc_1 is the AWGN on E-UTRAN cell 1 frequency $\hat{E}s_1$ / Noc_1 is the ratio of E-UTRAN cell 1 signal / AWGN Noc_2 is the AWGN on NR cell 2 frequency $\hat{E}s_2$ / Noc_2 is the ratio of NR cell 2 signal / AWGN Noc_3 is the AWGN on E-UTRAN cell 3 frequency $\hat{E}s_3$ / Noc_3 is the ratio of E-UTRAN cell 3 signal / AWGN
4.5.2.6 EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC	Same as 4.5.2.5	Same as 4.5.2.5
4.5.2.8	Same as 4.5.2.1	Same as 4.5.2.1
4.5.2.9	Same as 4.5.2.1	Same as 4.5.2.1
4.5.2.10 EN-DC FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell	Noc ±1.5 dB $\hat{E}s_2$ / Noc ±0.3 dB	Note: $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN
4.5.3.1 EN-DC FR1 SCell activation and deactivation of known SCell in non-DRX for 160ms SCell measurement cycle	Average Noc_2 ±1.5 dB Average Noc_3 ±1.5 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Average $\hat{E}s_3$ / Noc_3 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB Noc_3 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB $\hat{E}s_3$ / Noc_3 ±0.3 dB	Note: Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Noc_3 is the AWGN on cell 3 frequency $\hat{E}s_3$ / Noc_3 is the ratio of cell 3 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
4.5.3.2 EN-DC FR1 SCell activation and deactivation of known SCell in non-DRX for 640ms SCell measurement cycle	Same as 4.5.3.1	Same as 4.5.3.1
4.5.3.3 EN-DC FR1 SCell activation and deactivation of unknown SCell in non-DRX	Same as 4.5.3.1	Same as 4.5.3.1
4.5.3.4 SCell Activation and deactivation of multiple unknown SCells in FR1 with single activation/deactivation command	Average Noc_2 ±1.5 dB Average Noc_3 ±1.5 dB Average Noc_4 ±1.5 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Average $\hat{E}s_3$ / Noc_3 ±0.3 dB Average $\hat{E}s_4$ / Noc_4 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB Noc_3 ±1.5 dB Meas PRB Noc_4 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB $\hat{E}s_3$ / Noc_3 ±0.3 dB Meas PRB $\hat{E}s_4$ / Noc_4 ±0.3 dB	Note: Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Noc_3 is the AWGN on cell 3 frequency $\hat{E}s_3$ / Noc_3 is the ratio of cell 3 signal / AWGN Noc_4 is the AWGN on cell 4 frequency $\hat{E}s_4$ / Noc_4 is the ratio of cell 4 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
4.5.3.5 EN-DC FR1 direct SCell activation at SCell addition of known SCell	Same as 4.5.3.1	Same as 4.5.3.1
4.5.3.6 EN-DC FR1 fast SCell Activation of known SCell in non-DRX for 160ms SCell measurement cycle	Average Noc_2 ±1.5 dB Average Noc_3 ±1.5 dB Average $\hat{E}s_2$ / Noc_1 ±0.3 dB Average $\hat{E}s_3$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB Noc_3 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB $\hat{E}s_3$ / Noc_3 ±0.3 dB	Note: Noc_2 is the AWGN on cell 2 frequency Noc_3 is the AWGN on cell 3 frequency $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN $\hat{E}s_3$ / Noc_3 is the ratio of cell 3 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19} for CSI-RSRP Meas PRB are # RB_0 to # RB_{105}.

4.5.3.7 EN-DC FR1 fast SCell Activation of known SCell in non-DRX for 640ms SCell measurement cycle	Same as 4.5.3.6	Same as 4.5.3.6
4.5.3.12 EN-DC FR1 Inter-band SSB-less SCell activation using A-TRS	Average Noc2 ±1.5 dB Average Noc3 ±1.5 dB Average Ês2 / Noc2 ±0.3 dB Average Ês3 / Noc3 ±0.3 dB Meas PRB Noc2 ±1.5 dB Meas PRB Noc3 ±1.5 dB Meas PRB Ês2 / Noc2 ±0.3 dB Meas PRB Ês3 / Noc3 ±0.3 dB	Note: Noc2 is the AWGN on cell 2 frequency Noc3 is the AWGN on cell 3 frequency Ês2 / Noc3 is the ratio of cell 2 signal / AWGN Ês3 / Noc3 is the ratio of cell 3 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RBJ to RBJ+19.
4.5.4.1 EN-DC FR1 UE UL carrier RRC reconfiguration delay	Noc2 ±1.5 dB Ês2 / Noc2 ±0.3 dB Noc3 ±1.5 dB Ês3 / Noc3 ±0.3 dB	Note: Noc2 is the AWGN on cell 2 frequency Ês2 / Noc2 is the ratio of cell 2 signal / AWGN Noc3 is the AWGN on cell 3 frequency Ês3 / Noc3 is the ratio of cell 3 signal / AWGN
4.5.5.1 EN-DC FR1 SSB-based beam failure detection and link recovery in non-DRX	Average Noc_2 ±1.5 dB Average $Ês_2$ / Noc_2 ±0.3 dB Meas PRB Noc2 ±1.5 dB Meas PRB $Ês_2$ / Noc_2 ±0.3 dB Fading profile ±0.7 dB	Note: Noc_2 is the AWGN on cell 2 frequency $Ês_2$ / Noc_2 is the SNR for the SSB Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
4.5.5.2 EN-DC FR1 SSB-based beam failure detection and link recovery in DRX	Same as 4.5.5.1	Same as 4.5.5.1
4.5.5.3 EN-DC FR1 CSI-RS-based beam failure detection and link recovery in non-DRX	Average Noc_2 ±1.5 dB Average $Ês_2$ / Noc_2 ±0.3 dB Meas PRB Noc2 ±1.5 dB Meas PRB $Ês_2$ / Noc_2 ±0.3 dB Fading profile ±0.7 dB	Note: Noc_2 is the AWGN on cell 2 frequency $Ês_2$ / Noc_2 is the SNR for the CSI-RS Meas PRB is the measurement PRB for CSI-RSRP #RB_0 to RB_{274}
4.5.5.4 EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX	Same as 4.5.5.3	Same as 4.5.5.3
4.5.5.5 EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX	Average Noc_2 ±1.5 dB Average $Ês_2$ / Noc_2 ±0.3 dB Meas PRB Noc2 ±1.5 dB Meas PRB $Ês_2$ / Noc_2 ±0.3 dB Fading profile ±0.7 dB	Note: Noc_2 is the AWGN on cell 2 frequency $Ês_2$ / Noc_2 is the SNR for the SSB Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19} Noc_2 is the AWGN on cell 2 frequency $Ês_2$ / Noc_2 is the SNR for the CSI-RS Meas PRB is the measurement PRB for CSI-RSRP #RB_0 to RB_{274}
4.5.5.6 EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in DRX	Same as 4.5.5.5	Same as 4.5.5.5
4.5.5.7 EN-DC FR1 PSCell TRP specific SSB-based beam failure detection and link recovery in non-DRX	Same as 4.5.5.1	Same as 4.5.5.1
4.5.5.8 EN-DC FR1 SCell TRP specific CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX	Same as 4.5.5.5	Same as 4.5.5.5

4.5.6.1.1 EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC	±0.6 dB	Overall system uncertainty for AWGN conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty^2 + (0.25 x AWGN flatness and signal flatness)^2) Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±2.0 dB
4.5.6.1.2 EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC	Same as 4.5.6.1.1	Same as 4.5.6.1.1
4.5.6.2.1 EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC	±0.6 dB	Overall system uncertainty for AWGN conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty^2 + (0.25 x AWGN flatness and signal flatness)^2) Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±2.0 dB
4.5.6.3.1 Simultaneous E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in EN-DC on multiple CCs	±0.6 dB	Overall system uncertainty for AWGN conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty^2 + (0.25 x AWGN flatness and signal flatness)^2) Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±2.0 dB
4.5.6.4.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC on multiple CCs	Same as 4.5.6.3.1	Same as 4.5.6.3.1
4.5.7.1 EN-DC FR1 addition and release delay of known PSCell	Average Noc_1 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB	Noc_1 is the AWGN on NR freq1 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
4.5.8.1 EN-DC FR1 interruptions at switching between two uplink carriers	Average Noc ±1.5 dB Average $\hat{E}s$ / Noc ±0.3 dB	Noc is the AWGN on cell 2 frequency $\hat{E}s$ / Noc is the ratio of cell 2 signal / AWGN
4.5.9.1 UE specific CBW change on FR1 NR PSCell with non-DRX in synchronous EN-DC	±1.0 dB	The following parameters are proposed to be controlled: - AWGN flatness and signal flatness ±2 dB - Signal-to-noise ratio uncertainty ±0.3 dB Test System uncertainty on PSCell = SQRT $(0.3^2 + (0.25 * 2)^2) = 0.58$ dB, rounded to 1.0 dB.

4.5.10.1 EN-DC FR1 PSCell activation and deactivation delay	Same as 4.5.7.1	Same as 4.5.7.1
4.5.11.1 EN-DC FR1 conditional PSCell addition delay	Average Noc_1 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB	Noc_1 is the AWGN on NR freq1 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
4.6.1.1 EN-DC FR1 event-triggered reporting without gap in non-DRX	Noc ±1.5 dB $\hat{E}s_2$ / Noc ±0.3 dB $\hat{E}s_3$ / Noc ±0.3 dB	Note: $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN $\hat{E}s_3$ / Noc is the ratio of cell 3 signal / AWGN
4.6.1.2 EN-DC FR1 event-triggered reporting without gap in DRX	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.3 EN-DC FR1 event-triggered reporting with gap in non-DRX	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.4 EN-DC FR1 event-triggered reporting with gap in DRX	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.5 EN-DC FR1 event-triggered reporting without gap in non-DRX with SSB time index detection	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.6 EN-DC FR1 event-triggered reporting with gap in non-DRX with SSB time index detection	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.7 EN-DC FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.8 EN-DC FR1 event triggered reporting cell without SSB time index detection in DRX for UE configured with highSpeedMeasCA-Scell-r17	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Average $\hat{E}s_3$ / Noc_2 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB $\hat{E}s_3$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on NR freq1 Noc_2 is the AWGN on NR freq2 $\hat{E}s_1$ / Noc_1 is the ratio of cell 2 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 3 signal / AWGN $\hat{E}s_3$ / Noc_2 is the ratio of cell 4 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
4.6.2.1 EN-DC FR1-FR1 event-triggered reporting in non-DRX	Average Noc_2 ±1.5 dB Average Noc_3 ±1.5 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Average $\hat{E}s_3$ / Noc_3 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB Noc_3 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB $\hat{E}s_3$ / Noc_3 ±0.3 dB	Noc_2 is the AWGN on NR freq2 Noc_3 is the AWGN on NR freq3 $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN $\hat{E}s_3$ / Noc_3 is the ratio of cell 3 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
4.6.2.2 EN-DC FR1-FR1 event-triggered reporting in DRX	Same as 4.6.2.1	Same as 4.6.2.1
4.6.2.5 EN-DC FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection	Same as 4.6.2.1	Same as 4.6.2.1
4.6.2.6 EN-DC FR1-FR1 event-triggered reporting in DRX with SSB time index detection	Same as 4.6.2.1	Same as 4.6.2.1
4.6.2.9 EN-DC FR1-FR1 event triggered reporting without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17	Same as 4.6.2.1	Same as 4.6.2.1
4.6.4.1 EN-DC FR1 SSB-based L1-RSRP measurement in non-DRX	Average Noc ±1.5 dB Average $\hat{E}s_0$ / Noc ±0.3 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_0$ / Noc ±0.3 dB Meas PRB $\hat{E}s_1$ / Noc ±0.3 dB	Noc is the AWGN on NR freq1 $\hat{E}s_0$ / Noc is the SNR for the SSB#0 $\hat{E}s_1$ / Noc is the SNR for the SSB#1 Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
4.6.4.2 EN-DC FR1 SSB-based L1-RSRP measurement in DRX	Same as 4.6.4.1	Same as 4.6.4.1

4.6.4.3 EN-DC FR1 CSI-RS-based L1-RSRP measurement in non-DRX	Average Noc ±1.5 dB Average $\hat{E}s_0$ / Noc ±0.3 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_0$ / N_{oc} ±0.3 dB Meas PRB $\hat{E}s_1$ / N_{oc} ±0.3 dB	Noc is the AWGN on NR freq1 $\hat{E}s_0$ / Noc is the SNR for the CSI-RS#0 $\hat{E}s_1$ / Noc is the SNR for the CSI-RS#1 Meas PRB is the measurement PRB for CSI-RSRP #RB_0 to RB_{274}
4.6.4.4 EN-DC FR1 CSI-RS-based L1-RSRP measurement in DRX	Same as 4.6.4.3	Same as 4.6.4.3
4.6.4.5 EN-DC FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16	Same as 4.6.4.1	Same as 4.6.4.1
4.6.5.1 EN-DC FR1 SRS-RSRP measurement with non-DRX	Average Noc ±1.5 dB Average $\hat{E}s$ / Noc ±0.3 dB	Average Noc is the AWGN on virtual UE frequency (NR) on NR freq1 $\hat{E}s$ / Noc is the ratio of virtual UE signal / AWGN over the SRS resource RBs
4.6.5.2 EN-DC FR1 CLI-RSSI measurement with non-DRX	Noc2 ±1.5 dB $\hat{E}s2$ / Noc2 ±0.3 dB	Note: Noc2 is the AWGN on cell 2 (NR) frequency $\hat{E}s2$ / Noc2 is the ratio of cell 2 signal / AWGN
4.6.6.1 EN-DC intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC	Noc ±1.5 dB $\hat{E}s_2$ / Noc ±0.3 dB $\hat{E}s_3$ / Noc ±0.3 dB	Note: $\hat{E}s_2$ / Noc is the ratio of Cell 2 signal / AWGN $\hat{E}s_3$ / Noc is the ratio of Cell 3 signal / AWGN
4.6.7.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in non-DRX	Average Noc ±1.5 dB Average $\hat{E}s_0$ / Noc ±0.3 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_0$ / N_{oc} ±0.3 dB Meas PRB $\hat{E}s_1$ / N_{oc} ±0.3 dB	Noc is the AWGN on Cell 2 frequency $\hat{E}s_0$ / Noc is the SNR for the CSI-RS#0 $\hat{E}s_1$ / Noc is the SNR for the CSI-RS#1 Meas PRB is the measurement PRB for CSI-SINR #RB_0 to RB_{275}
4.6.7.2 EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR measurement in DRX	Average Noc ±1.5 dB Average $\hat{E}s_0$ / Noc ±0.3 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_0$ / N_{oc} ±0.3 dB Meas PRB $\hat{E}s_1$ / N_{oc} ±0.3 dB	Noc is the AWGN on Cell 2 frequency $\hat{E}s_0$ / Noc is the SNR for the SSB#0 $\hat{E}s_1$ / Noc is the SNR for the SSB#1 Meas PRB is the measurement PRB for SS-SINR #RB_J to RB_{J+19}
4.6.7.3 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX	Average Noc ±1.5 dB Average $\hat{E}s_0$ / Noc ±0.3 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_0$ / N_{oc} ±0.3 dB Meas PRB $\hat{E}s_1$ / N_{oc} ±0.3 dB	Noc is the AWGN on Cell 2 frequency $\hat{E}s_0$ / Noc is the SNR for the CSI-RS#0 $\hat{E}s_1$ / Noc is the SNR for the CSI-RS#1 Meas PRB is the measurement PRB for CSI-SINR #RB_0 to RB_{275}
4.7.1.1.1 EN-DC FR1 SS-RSRP absolute measurement accuracy	Average Noc ±1.5 dB Average $\hat{E}s_2$ / Noc ±0.3 dB Average $\hat{E}s_3$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc ±0.3 dB Meas PRB $\hat{E}s_3$ / Noc ±0.3 dB	Noc is the AWGN on NR freq1 $\hat{E}s_2$ / Noc is the cell 2 SNR $\hat{E}s_3$ / Noc is the cell 3 SNR Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
4.7.1.1.2 EN-DC FR1 SS-RSRP relative measurement accuracy	Same as 4.7.1.1.1	Same as 4.7.1.1.1
4.7.1.2.1 EN-DC FR1-FR1 SS-RSRP absolute measurement accuracy	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_2$ / Noc_1 ±0.3 dB Average $\hat{E}s_3$ / Noc_2 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_1 ±0.3 dB Meas PRB $\hat{E}s_3$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on NR freq1 Noc_2 is the AWGN on NR freq2 $\hat{E}s_2$ / Noc_1 is the cell 2 SNR $\hat{E}s_3$ / Noc_2 is the cell 3 SNR Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
4.7.1.2.2 EN-DC FR1-FR1 SS-RSRP relative measurement accuracy	Same as 4.7.1.2.1	Same as 4.7.1.2.1
4.7.2.1 EN-DC FR1 SS-RSRQ measurement accuracy	Same as 4.7.1.1.1	Same as 4.7.1.1.1
4.7.2.2.1 EN-DC FR1-FR1 SS-RSRQ absolute measurement accuracy	Same as 4.7.1.2.1	Same as 4.7.1.2.1
4.7.2.2.2 EN-DC FR1-FR1 SS-RSRQ relative measurement accuracy	Same as 4.7.1.2.1	Same as 4.7.1.2.1
4.7.3.1 EN-DC FR1 SS-SINR measurement accuracy	Same as 4.7.1.1.1	Same as 4.7.1.1.1

4.7.3.2.1 EN-DC FR1-FR1 SS-SINR absolute measurement accuracy	Same as 4.7.1.2.1	Same as 4.7.1.2.1
4.7.3.2.2 EN-DC FR1-FR1 SS-SINR relative measurement accuracy	Same as 4.7.1.2.1	Same as 4.7.1.2.1
4.7.4.1.1 EN-DC FR1 SSB based L1-RSRP absolute measurement accuracy	Average Noc ±1.5 dB Average $\hat{E}s_2$ / Noc ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc ±0.8 dB	Noc is the AWGN on NR freq1 $\hat{E}s_2$ / Noc is the cell 2 SNR Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
4.7.4.1.2 EN-DC FR1 SSB based L1-RSRP relative measurement accuracy	Same as 4.7.4.1.1	Same as 4.7.4.1.1
4.7.4.2.1 EN-DC FR1 CSI-RS based L1-RSRP absolute measurement accuracy	Same as 4.7.4.1.1	Same as 4.7.4.1.1
4.7.4.2.2 EN-DC FR1 CSI-RS based L1-RSRP relative measurement accuracy	Same as 4.7.4.1.1	Same as 4.7.4.1.1
4.7.5.1 EN-DC FR1 SFTD measurement accuracy	Average Noc_1 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.8 dB	Noc_1 is the AWGN on NR freq1 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19} Noc_2 is the AWGN on E-UTRA freq2 $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_{22} to RB_{27}
4.7.6.1 EN-DC SRS-RSRP measurement accuracy with FR1 serving cell	Average Noc ±1.5 dB Average $\hat{E}s$ / Noc ±0.3 dB	Average Noc is the AWGN on virtual UE frequency (NR) on NR freq1 $\hat{E}s$ / Noc is the ratio of virtual UE signal / AWGN over the SRS resource RBs
4.7.7.1.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR absolute measurement accuracy	Average Noc ±1.5 dB Average $\hat{E}s_2$ / Noc ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc ±0.8 dB	Noc is the AWGN on NR freq1 $\hat{E}s_2$ / Noc is the SNR for the CSI-RS#0 & CSI-RS#1 Meas PRB is the measurement PRB for CSI-SINR #RB_0 to RB_{275}
4.7.7.1.2 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR relative measurement accuracy	Same as 4.7.7.1.1	Same as 4.7.7.1.1
4.7.7.2 EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy	Average Noc ±1.5 dB Average $\hat{E}s_2$ / Noc ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc ±0.8 dB	Noc is the AWGN on NR freq1 $\hat{E}s_2$ / Noc is the SNR for the SSB#0 & SSB#1 Meas PRB is the measurement PRB for SS-SINR #RB_J to RB_{J+19}
4.7.7.3.1 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR absolute measurement accuracy	Same as 4.7.7.1.1	Same as 4.7.7.1.1
4.7.7.3.2 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR relative measurement accuracy	Same as 4.7.7.1.1	Same as 4.7.7.1.1
4.7.8.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell	Same as 4.7.1.1.1	Same as 4.7.1.1.1
4.7.8.2 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell	Same as 4.7.1.2.1	Same as 4.7.1.2.1

Table F.1.1.2-3a: Maximum test system uncertainty for RRM requirements for NE-DC FR1 test cases

Subclause	Maximum Test System Uncertainty[1]	Derivation of Test System Uncertainty
4A.1.1.1 NE-DC FR1 addition and release delay of known PSCell	Noc ±1.5 dB $\hat{E}s$ / Noc ±0.3 dB	Note: $\hat{E}s$ / Noc is the ratio of E-UTRA cell signal / AWGN

4A.2.1.1 NE-DC FR1 SFTD accuracy	Noc1 ±1.5 dB Ês1 / Noc1 ±0.3 dB Noc2 ±1.5 dB Ês2 / Noc2 ±0.8 dB	Note: Ês / Noc is the ratio of NR cell signal / AWGN Ês2 / Noc2 is the ratio of E-UTRA cell signal / AWGN

Table F.1.1.2-4: Maximum test system uncertainty for RRM requirements for SA FR1 test cases

Subclause	Maximum Test System Uncertainty[1]	Derivation of Test System Uncertainty
6.1.1.1 NR SA FR1 cell re-selection	Noc ±1.5 dB Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB	Note: Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 2 signal / AWGN
6.1.1.2 NR SA FR1-FR1 cell re-selection	Noc1 ±1.5 dB Ês1 / Noc1 ±0.3 dB Noc2 ±1.5 dB Ês2 / Noc2 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Noc2 is the AWGN on cell 2 frequency Ês2 / Noc2 is the ratio of cell 2 signal / AWGN
6.1.1.3 NR SA FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	Same as 6.1.1.1	Same as 6.1.1.1
6.1.1.4 NR SA FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	Same as 6.1.1.1	Same as 6.1.1.1
6.1.1.5 NR SA FR1-FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	Same as 6.1.1.2	Same as 6.1.1.2
6.1.1.6 NR SA FR1-FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	Same as 6.1.1.2	Same as 6.1.1.2
6.1.1.7 NR SA FR1 cell re-selection for UE configured with highSpeedMeasFlag-r16	Same as 6.1.1.1	Same as 6.1.1.1
6.1.1.8 NR SA FR1-FR1 Cell reselection for UE configured with highSpeedMeasInterFreq-r17	Same as 6.1.1.2	Same as 6.1.1.2
6.1.1.9 NR SA FR1 cell reselection to intra-frequency NR case for UE operating on a cell with less than 5MHz BW	Noc ±1.5 dB Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB	Note: Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 2 signal / AWGN
6.1.2.1 NR SA FR1 – E-UTRA cell re-selection to higher priority E-UTRA	Noc1 ±1.5 dB Ês1 / Noc1 ±0.3 dB Noc2 ±1.5 dB Ês2 / Noc2 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 (NR) frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Noc2 is the AWGN on cell 2 (E-UTRAN) frequency Ês2 / Noc2 is the ratio of cell 2 signal / AWGN
6.1.2.2 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA	Same as 6.1.2.1	Same as 6.1.2.1
6.1.2.3 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRAN for UE fulfilling low mobility relaxed measurement criterion	Same as 6.1.2.1	Same as 6.1.2.1
6.1.2.4 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRAN for UE fulfilling not-at-cell edge relaxed measurement criterion	Same as 6.1.2.1	Same as 6.1.2.1

6.1.2.5 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA for UE configured with highSpeedMeasFlag-r16	Same as 6.1.2.1	Same as 6.1.2.1
6.2.1 NR SA FR1 TA Validation for CG-SDT	Average Noc ±1.5 dB Average Ês / Noc ±0.3 dB Meas PRB Ês / Noc ±0.3 dB	Note: Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.3.1.1 NR SA FR1 handover with known target cell	Average Noc ±1.5 dB Average Ês1 / Noc ±0.3 dB Average Ês2 / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $Ês_1$ / Noc ±0.3 dB Meas PRB $Ês_2$ / Noc ±0.3 dB	Note: Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.3.1.2 NR SA FR1 handover with unknown target cell	Same as 6.3.1.1	Same as 6.3.1.1
6.3.1.3 NR SA FR1-FR1 Handover with unknown Target Cell	Noc1 ±1.5 dB Ês1 / Noc1 ±0.3 dB Noc2 ±1.5 dB Ês2 / Noc2 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Noc2 is the AWGN on cell 2 frequency Ês2 / Noc2 is the ratio of cell 2 signal / AWGN
6.3.1.4 NR SA FR1 – E-UTRA handover with known target cell	Same as 6.1.2.1	Same as 6.1.2.1
6.3.1.5 NR SA FR1 – E-UTRA handover with unknown target cell	Same as 6.1.2.1	Same as 6.1.2.1
6.3.1.6 NR SA FR1 – UTRAN FDD handover with known target cell	Noc ±1.5 dB Ês / Noc ±0.3 dB Ioc ±0.7 dB Îor / Ioc ± 0.3dB CPICH Ec / Ior ± 0.1dB SCH Ec / Ior ± 0.1dB	Note: Noc is the AWGN on cell 1 frequency Ês / Noc is the ratio of cell 1 signal / AWGN Ioc is the AWGN on cell 2 frequency Îor / Ioc is the ratio of cell 2 signal / AWGN CPICH Ec / Ior is the ratio of cell 2 CPICH code level / Ior SCH Ec / Ior is the ratio of cell 2 SCH code level / Ior
6.3.1.7 NR SA FR1 synchronous DAPS handover	Same as 6.3.1.1	Same as 6.3.1.1
6.3.1.8 NR SA FR1 asynchronous DAPS handover	Same as 6.3.1.1	Same as 6.3.1.1
6.3.1.9 NR SA FR1 Intra-band inter-frequency synchronous DAPS handover	Same as 6.3.1.3	Same as 6.3.1.3
6.3.1.10 NR SA FR1 Intra-band inter-frequency asynchronous DAPS handover	Same as 6.3.1.3	Same as 6.3.1.3
6.3.1.11 NR SA FR1 Inter-band inter-frequency synchronous DAPS handover	Same as 6.3.1.3	Same as 6.3.1.3
6.3.1.12 NR SA FR1 Inter-band inter-frequency asynchronous DAPS handover	Same as 6.3.1.3	Same as 6.3.1.3
6.3.1.18 NR SA FR1 Intra-frequency handover for unknown target cell operating with 12 PRB SSB bandwidth	Average Noc ±1.5 dB Average Ês1 / Noc ±0.3 dB Average Ês2 / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $Ês_1$ / Noc ±0.3 dB Meas PRB $Ês_2$ / Noc ±0.3 dB	Note: Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.3.2.1.1 NR SA FR1 RRC re-establishment	Same as 6.1.1.1	Same as 6.1.1.1
6.3.2.1.2 NR SA FR1 – FR1 RRC re-establishment	Same as 6.1.1.2	Same as 6.1.1.2

6.3.2.1.3 NR SA FR1 RRC re-establishment without serving cell timing	Average Noc ±1.5 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Average $\hat{E}s_2$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc ±0.3 dB	Note: $\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.3.2.2.1	N_{oc} ±1.5 dB $\hat{E}s$ / N_{oc} ±0.3 dB Uplink absolute power measurement ±1.5 dB Uplink relative power measurement ±0.7 dB ±112Tc Uplink signal transmit timing relative to downlink	$\hat{E}s_1$ / N_{oc} is the ratio of cell 1 signal / AWGN T_c = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
6.3.2.2.2	Same as 6.3.2.2.1	Same as 6.3.2.2.1
6.3.2.2.3	Same as 6.3.2.2.1	Same as 6.3.2.2.1
6.3.2.2.4	Same as 6.3.2.2.1	Same as 6.3.2.2.1
6.3.2.3.1 NR SA FR1 RRC connection release with redirection	Same as 6.1.1.2	Same as 6.1.1.2
6.3.2.3.2 NR SA FR1 – E-UTRA RRC connection release with redirection	Same as 6.1.2.1	Same as 6.1.2.1
6.3.2.4.1 PDCCH-order RACH on neighbor cell in FR1 when RACH BW is within active UL BWP	Average Noc ±1.5 dB Average $\hat{E}s0$ / Noc ±0.3 dB Average $\hat{E}s1$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s0$ / Noc ±0.3 dB Meas PRB $\hat{E}s1$ / Noc ±0.3 dB ±112Tc Uplink signal transmit timing relative to downlink	Noc is the AWGN on NR freq1 $\hat{E}s0$ / Noc is the SNR for Cell 1 $\hat{E}s1$ / Noc is the SNR for Cell 2 Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19 Tc = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
6.3.2.4.2 PDCCH-ordered RACH to an inter-frequency candidate cell in FR1 for LTM	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB ±112Tc Uplink signal transmit timing relative to downlink	Noc_1 is the AWGN on NR freq1 Noc_2 is the AWGN on NR freq2 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19} Tc = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
6.3.2.4.3 PDCCH-order RACH on neighbour cell without L1-RSRP measurement in FR1 when RACH BW is within active UL BWP	Same as 6.3.2.4.1	Same as 6.3.2.4.1
6.3.3.1 NR SA FR1 conditional handover	Same as 6.3.1.1	Same as 6.3.1.1
6.3.3.2 NR SA FR1-FR1 conditional handover	Same as 6.3.1.3	Same as 6.3.1.3
6.3.3.6 NR SA FR1 Intra-frequency NES triggering conditional handover	Same as 6.3.1.1	Same as 6.3.1.1
6.3.3.7 NR SA FR1-FR1 Inter-frequency NES-based conditional handover	Same as 6.3.1.3	Same as 6.3.1.3

6.3.4.1 RACH-based Intra-frequency PCell switch from FR1 to FR1	Average Noc ±1.5 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Average $\hat{E}s_2$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc ±0.3 dB	Note: $\hat{E}s1$ / Noc is the ratio of cell 1 signal / AWGN $\hat{E}s2$ / Noc is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.3.4.2 RACH-based Inter-frequency PCell switch from FR1 to FR1	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on NR freq 1 Noc_2 is the AWGN on NR freq 2 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.3.4.3 RACH-less Intra-frequency PCell switch from FR1 to FR1	Average Noc ±1.5 dB Average $\hat{E}s1$ / Noc ±0.3 dB Average $\hat{E}s2$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc ±0.3 dB	Noc is the AWGN on NR freq1 $\hat{E}s1$ / Noc is the SNR for Cell 1 $\hat{E}s2$ / Noc is the SNR for Cell 2 Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.3.4.4 NR SA FR1 RACH-less Intra-frequency PCell switch from FR1 to FR1 without L1-RSRP measurement	Same as 6.3.4.3	Same as 6.3.4.3
6.4.1.1 EN-DC FR1 UE transmit timing accuracy	Noc ±1.5 dB $\hat{E}s_1$ / N_{oc} ±0.3 dB ±112Tc Uplink signal transmit timing relative to downlink	$\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN Tc = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
6.4.3.1 NR SA FR1 timing advance adjustment accuracy	Noc ±1.5 dB $\hat{E}s_1$ / N_{oc} ±0.3 dB ±88T_c Timing Advance Adjustment accuracy	$\hat{E}s_1$ / N_{oc} is the ratio of cell 1 signal / AWGN T_c = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
6.5.1.1 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode	Average Noc ±1.5 dB Average $\hat{E}s$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s$ / Noc ±0.3 dB Fading profile ±0.7 dB	Noc is the AWGN on cell 1 frequency $\hat{E}s$ / Noc is the SNR Meas PRB are the measurement PRB for SSB-based RLM #RB_J to RB_{J+19}
6.5.1.2 NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode	Same as 6.5.1.1	Same as 6.5.1.1
6.5.1.3 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in DRX mode	Same as 6.5.1.1	Same as 6.5.1.1
6.5.1.4 NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in DRX mode	Same as 6.5.1.1	Same as 6.5.1.1
6.5.1.5 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode	Same as 6.5.1.1	Same as 6.5.1.1
6.5.1.6 NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode	Same as 6.5.1.1	Same as 6.5.1.1

6.5.1.7 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode	Same as 6.5.1.1	Same as 6.5.1.1
6.5.1.8 NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode	Same as 6.5.1.1	Same as 6.5.1.1
6.5.1.9 SA FR1 radio link monitoring out-of-sync Test for PSCell configured with CSI-RS-based RLM for UE fulfilling relaxed measurement criterion	Same as 6.5.1.1	Same as 6.5.1.1
6.5.2.1 NR SA FR1 interruptions during measurements on deactivated NR SCC	Noc_1 ±1.5 dB Noc_2 ±1.5 dB $\hat{E}s_1 / Noc_1$ ±0.3 dB $\hat{E}s_2 / Noc_2$ ±0.3 dB	Note: $\hat{E}s_1 / Noc_1$ is the ratio of cell 1 signal / AWGN $\hat{E}s_2 / Noc_2$ is the ratio of cell 2 signal / AWGN
6.5.2.2	Same as 4.5.2.1	Same as 4.5.2.1
6.5.3.1 NR SA FR1 SCell activation and deactivation of known SCell in non-DRX for 160ms SCell measurement cycle	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1 / Noc_1$ ±0.3 dB Average $\hat{E}s_2 / Noc_2$ ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1 / Noc_1$ ±0.3 dB Meas PRB $\hat{E}s_2 / Noc_2$ ±0.3 dB	Note: Noc_1 is the AWGN on cell 1 frequency Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_1 / Noc_1$ is the ratio of cell 1 signal / AWGN $\hat{E}s_2 / Noc_2$ is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.5.3.2 NR SA FR1 SCell activation and deactivation of known SCell in non-DRX for 640ms SCell measurement cycle	Same as 6.5.3.1	Same as 6.5.3.1
6.5.3.3 NR SA FR1 SCell activation and deactivation of unknown SCell in non-DRX	Same as 6.5.3.1	Same as 6.5.3.1
6.5.3.4 NR SA FR1 direct SCell activation at SCell addition of known SCell	Same as 6.5.3.1	Same as 6.5.3.1
6.5.3.5 NR SA FR1 direct SCell activation at handover with known SCell	Average Noc1 ±1.5 dB Average Noc2 ±1.5 dB Average Ês1 / Noc1 ±0.3 dB Average Ês2 / Noc2 ±0.3 dB Average Ês3 / Noc1 ±0.3 dB Meas PRB Noc1 ±1.5 dB Meas PRB Noc2 ±1.5 dB Meas PRB Ês1 / Noc1 ±0.3 dB Meas PRB Ês2 / Noc2 ±0.3 dB Meas PRB Ês3 / Noc1 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 frequency Noc2 is the AWGN on cell 2 frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Ês2 / Noc2 is the ratio of cell 2 signal / AWGN Ês3 / Noc1 is the ratio of cell 3 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RBJ to RBJ+19
6.5.3.10 NR SA FR1 fast SCell Activation of known SCell in non-DRX for 160ms SCell measurement cycle	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1 / Noc_1$ ±0.3 dB Average $\hat{E}s_2 / Noc_2$ ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1 / Noc_1$ ±0.3 dB Meas PRB $\hat{E}s_2 / Noc_2$ ±0.3 dB	Note: Noc_1 is the AWGN on cell 1 frequency Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_1 / Noc_1$ is the ratio of cell 1 signal / AWGN $\hat{E}s_2 / Noc_2$ is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19} for CSI-RSRP Meas PRB are # RB_0 to # RB_{105}.
6.5.3.11 NR SA FR1 fast SCell Activation of known SCell in non-DRX for 640 ms SCell measurement cycle	Same as 6.5.3.10	Same as 6.5.3.10

6.5.3.16 NR SA FR1 Inter-band SSB-less SCell Activation based on A-TRS in non-DRX	Average Noc1 ±1.5 dB Average Noc2 ±1.5 dB Average Ês1 / Noc1 ±0.3 dB Average Ês2 / Noc2 ±0.3 dB Meas PRB Noc1 ±1.5 dB Meas PRB Noc2 ±1.5 dB Meas PRB Ês1 / Noc1 ±0.3 dB Meas PRB Ês2 / Noc2 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 frequency Noc2 is the AWGN on cell 2 frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Ês2 / Noc2 is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RBJ to RBJ+19.
6.5.4.1 NR SA FR1 UE UL carrier RRC reconfiguration delay	Noc1 ±1.5 dB Ês1 / Noc1 ±0.3 dB Noc2 ±1.5 dB Ês2 / Noc2 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Noc2 is the AWGN on cell 2 frequency Ês2 / Noc2 is the ratio of cell 2 signal / AWGN
6.5.5.1 NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX	Average Noc_1 ±1.5 dB Average $Ês_1$ / Noc_1 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB $Ês_1$ / Noc_1 ±0.3 dB Fading profile ±0.7 dB	Note: Noc_1 is the AWGN on cell 1 frequency $Ês_1$ / Noc_1 is the SNR for the SSB Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.5.5.2 NR SA FR1 SSB-based beam failure detection and link recovery in DRX	Same as 6.5.5.1	Same as 6.5.5.1
6.5.5.3 NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX	Average Noc_1 ±1.5 dB Average $Ês_1$ / Noc_1 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB $Ês_1$ / Noc_1 ±0.3 dB Fading profile ±0.7 dB	Note: Noc_1 is the AWGN on cell 1 frequency $Ês_1$ / Noc_1 is the SNR for the CSI-RS Meas PRB is the measurement PRB for CSI-RSRP #RB_0 to RB_{274}
6.5.5.4 NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX	Same as 6.5.5.3	Same as 6.5.5.3
6.5.5.5 NR SA FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX	Average Noc_2 ±1.5 dB Average $Ês_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $Ês_2$ / Noc_2 ±0.3 dB Fading profile ±0.7 dB	Note: Noc_2 is the AWGN on cell 2 frequency $Ês_2$ / Noc_2 is the SNR for the SSB and CSI-RS Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.5.5.6 NR SA FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in DRX	Same as 6.5.5.5	Same as 6.5.5.5
6.5.5.7 NR SA FR1 PCell TRP Specific CSI-RS-based Beam Failure Detection and Link Recovery in DRX	Same as 6.5.5.3	Same as 6.5.5.3
6.5.6.1.1 NR SA FR1-FR1 DCI-based DL active BWP switch in non-DRX	±0.6 dB	Overall system uncertainty for AWGN conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty^2 + (0.25 x AWGN flatness and signal flatness)^2) Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±2.0 dB
6.5.6.1.2 NR SA FR1 DCI-based DL active BWP switch in non-DRX	Same as 6.5.6.1.1	Same as 6.5.6.1.1

6.5.6.2.1 NR SA FR1 RRC-based DL active BWP switch in non-DRX	±0.6 dB	Overall system uncertainty for AWGN conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty^2 + (0.25 x AWGN flatness and signal flatness)^2) Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±2.0 dB
6.5.7.1 NR SA FR1 DL Interruptions at switching between two uplink carriers in FDD-TDD CA	Noc1 ±1.5 dB Noc2 ±1.5 dB Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB	Note: Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Ês2 / Noc2 is the ratio of cell 2 signal / AWGN
6.5.7.2 NR SA FR1 DL Interruptions at switching between two uplink carriers in TDD-TDD CA	Same as 6.5.7.1	Same as 6.5.7.1
6.5.7A.1 NR SA FR1 DL interruptions at switching between two uplink carriers in FDD-TDD CA	Same as 6.5.7.1	Same as 6.5.7.1
6.5.7A.2 NR SA FR1 DL interruptions at switching between two uplink carriers in TDD-TDD CA	Same as 6.5.7.1	Same as 6.5.7.1
6.5.7B.1 NR SA FR1 DL interruptions at switching between two uplink bands in FDD-TDD CA	Noc1 ±1.5 dB Noc2 ±1.5 dB Noc3 ±1.5 dB Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB Ês3 / Noc ±0.3 dB	Note: Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Ês2 / Noc2 is the ratio of cell 2 signal / AWGN Ês3 / Noc3 is the ratio of cell 3 signal / AWGN
6.5.7B.2 NR SA FR1 DL interruptions at switching between two uplink bands in TDD-TDD CA	Noc1 ±1.5 dB Noc2 ±1.5 dB Noc3 ±1.5 dB Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB Ês3 / Noc ±0.3 dB	Note: Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Ês2 / Noc2 is the ratio of cell 2 signal / AWGN Ês3 / Noc3 is the ratio of cell 3 signal / AWGN
6.5.7C.1 NR SA FR1 DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA	Same as 6.5.7B.1	Same as 6.5.7B.1
6.5.7D.1 NR SA FR1 DL interruptions at switching across three uplink bands in TDD-TDD CA for single TAG	Same as 6.5.7B.1	Same as 6.5.7B.1
6.5.7D.2 NR SA FR1 DL interruptions at switching across four uplink bands in FDD-TDD CA for single TAG	Noc1 ±1.5 dB Noc2 ±1.5 dB Noc3 ±1.5 dB Noc4 ±1.5 dB Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB Ês3 / Noc ±0.3 dB Ês4 / Noc ±0.3 dB	Note: Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Ês2 / Noc2 is the ratio of cell 2 signal / AWGN Ês3 / Noc3 is the ratio of cell 3 signal / AWGN Ês4 / Noc4 is the ratio of cell 4 signal / AWGN
6.5.7D.3 NR SA FR1 DL interruptions at switching across three uplink bands in FDD-TDD CA for two TAGs	Same as 6.5.7B.1	Same as 6.5.7B.1
6.5.7D.4 NR SA FR1 DL interruptions at switching across four uplink bands in TDD-TDD CA for two TAGs	Same as 6.5.7D.2	Same as 6.5.7D.2

6.5.8.1 UE specific CBW change on PCell in FR1 in non-DRX	Test System uncertainty on Cell1: ±0.6 dB	Overall system uncertainty for AWGN conditions comprises two quantities: 1. Signal-to-noise ratio uncertainty: ±0.3 dB, 2. Effect of AWGN flatness and signal flatness: ±2.0 dB. Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty^2 + (0.25 x AWGN flatness and signal flatness)^2) = 0.58dB, round up to 0.6dB.
6.6.1.1 SA event triggered reporting tests without gap under non-DRX	Noc ±1.5 dB $\hat{E}s_1$ / Noc ±0.3 dB $\hat{E}s_2$ / Noc ±0.3 dB	Note: $\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN
6.6.1.2 SA event triggered reporting tests without gap under DRX	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.3 SA event triggered reporting tests with per-UE gaps under non-DRX	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.4 SA event triggered reporting tests with per-UE gaps under DRX	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.5 SA event triggered reporting tests without gap under non-DRX with SSB index reading	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.6 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.7 NR SA FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.8 NR SA FR1 event triggered reporting without gap in DRX for UE configured with highSpeedMeasCA-Scell-r17	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Average $\hat{E}s_3$ / Noc_2 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB $\hat{E}s_3$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on NR freq1 Noc_2 is the AWGN on NR freq2 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN $\hat{E}s_3$ / Noc_2 is the ratio of cell 3 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.6.1.13 NR SA FR1 event triggered reporting tests without gap in DRX under Cell DTX	Same as 6.6.1.1	Same as 6.6.1.1
6.6.2.1 NR SA FR1-FR1 event-triggered reporting in non-DRX	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on NR freq1 Noc_2 is the AWGN on NR freq2 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.6.2.2 NR SA FR1-FR1 event-triggered reporting in DRX	Same as 6.6.2.1	Same as 6.6.2.1
6.6.2.5 NR SA FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection	Same as 6.6.2.1	Same as 6.6.2.1

6.6.2.6 NR SA FR1-FR1 event-triggered reporting in DRX with SSB time index detection	Same as 6.6.2.1	Same as 6.6.2.1
6.6.2.9	Same as 6.6.2.1	Same as 6.6.2.1
6.6.2.10	Same as 6.6.2.1	Same as 6.6.2.1
6.6.2.11	Same as 6.6.2.1	Same as 6.6.2.1
6.6.2.12 NR SA FR1-FR1 event triggered reporting tests without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17	Same as 6.6.2.1	Same as 6.6.2.1
6.6.3.1 NR SA FR1 – E-UTRAN event-triggered reporting in non-DRX	Freq 1 Noc ±1.5 dB Freq 2 Noc ±1.5 dB Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB	Note: Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 2 signal / AWGN
6.6.3.2 NR SA FR1 – E-UTRAN event-triggered reporting in DRX	Same as 6.6.3.1	Same as 6.6.3.1
6.6.3.3 NR SA FR1 – E-UTRAN event-triggered reporting in DRX for UE configured with highSpeedMeasFlag-r16	Freq 1 Noc ±1.5 dB Freq 2 Noc ±1.5 dB Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB	Note: Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 2 signal / AWGN
6.6.4.1 NR SA FR1 SSB-based L1-RSRP measurement in non-DRX	Average Noc ±1.5 dB Average $\hat{E}s_0$ / Noc ±0.3 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_0$ / Noc ±0.3 dB Meas PRB $\hat{E}s_1$ / Noc ±0.3 dB	Noc is the AWGN on NR freq1 $\hat{E}s_0$ / Noc is the SNR for the SSB#0 $\hat{E}s_1$ / Noc is the SNR for the SSB#1 Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.6.4.2 NR SA FR1 SSB-based L1-RSRP measurement in DRX	Same as 6.6.4.1	Same as 6.6.4.1
6.6.4.3 NR SA FR1 CSI-RS-based L1-RSRP measurement in non-DRX	Average Noc ±1.5 dB Average $\hat{E}s_0$ / Noc ±0.3 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_0$ / N_{oc} ±0.3 dB Meas PRB $\hat{E}s_1$ / N_{oc} ±0.3 dB	Noc is the AWGN on NR freq1 $\hat{E}s_0$ / Noc is the SNR for the CSI-RS#0 $\hat{E}s_1$ / Noc is the SNR for the CSI-RS#1 Meas PRB is the measurement PRB for CSI-RSRP #RB_0 to RB_{274}
6.6.4.4 NR SA FR1 CSI-RS-based L1-RSRP measurement in DRX	Same as 6.6.4.3	Same as 6.6.4.3
6.6.4.5 NR SA FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16	Same as 6.6.4.1	Same as 6.6.4.1
6.6.4.6 NR SA FR1 Inter-cell SSB based L1-RSRP measurements on PCell in DRX	Same as 6.6.4.1	Same as 6.6.4.1
6.6.5.1 NR SA FR1 – UTRAN event-triggered reporting in non-DRX	Noc ±1.5 dB Ês / Noc ±0.3 dB Ioc ±0.7 dB Îor / Ioc ± 0.3dB CPICH Ec / Ior ± 0.1dB SCH Ec / Ior ± 0.1dB	Note: Noc is the AWGN on cell 1 frequency Ês / Noc is the ratio of cell 1 signal / AWGN Ioc is the AWGN on cell 2 frequency Îor / Ioc is the ratio of cell 2 signal / AWGN CPICH Ec / Ior is the ratio of cell 2 CPICH code level / Ior SCH Ec / Ior is the ratio of cell 2 SCH code level / Ior
6.6.6.1 NR SA FR1 SRS-RSRP measurement in non-DRX	Average Noc ±1.5 dB Average Ês / Noc ±0.3 dB	Average Noc is the AWGN on virtual UE frequency (NR) on NR freq1 Ês / Noc is the ratio of virtual UE signal / AWGN over the SRS resource RBs
6.6.8.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX	Average Noc ±1.5 dB Average $\hat{E}s_0$ / Noc ±0.3 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_0$ / N_{oc} ±0.3 dB Meas PRB $\hat{E}s_1$ / N_{oc} ±0.3 dB	Noc is the AWGN on Cell 1 frequency $\hat{E}s_0$ / Noc is the SNR for the CSI-RS#0 $\hat{E}s_1$ / Noc is the SNR for the CSI-RS#1 Meas PRB is the measurement PRB for CSI-SINR #RB_0 to RB_{275}

6.6.8.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX	Average Noc ±1.5 dB Average $\hat{E}s_0$ / Noc ±0.3 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_0$ / N_{oc} ±0.3 dB Meas PRB $\hat{E}s_1$ / N_{oc} ±0.3 dB	Noc is the AWGN on Cell 1 frequency $\hat{E}s_0$ / Noc is the SNR for the SSB#0 $\hat{E}s_1$ / Noc is the SNR for the SSB#1 Meas PRB is the measurement PRB for SS-SINR #RB_J to RB_{J+19}
6.6.8.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX	Average Noc ±1.5 dB Average $\hat{E}s_0$ / Noc ±0.3 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_0$ / N_{oc} ±0.3 dB Meas PRB $\hat{E}s_1$ / N_{oc} ±0.3 dB	Noc is the AWGN on Cell 1 frequency $\hat{E}s_0$ / Noc is the SNR for the CSI-RS#0 $\hat{E}s_1$ / Noc is the SNR for the CSI-RS#1 Meas PRB is the measurement PRB for CSI-SINR #RB_0 to RB_{275}
6.6.9.1 NR SA FR1 Idle mode CA/DC measurement for FR1	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on NR freq1 Noc_2 is the AWGN on NR freq2 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.6.15.1 NR SA FR1 Idle Mode measurements of inter-RAT CA candidate cells for early reporting	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on NR freq1 Noc_2 is the AWGN on LTE freq2 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.6.17.1 NR SA FR1 event triggered reporting tests with autonomous activation/deactivation Pre-MG	Noc ±1.5 dB $\hat{E}s_1$ / Noc ±0.3 dB $\hat{E}s_2$ / Noc ±0.3 dB	Note: $\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN
6.6.17.2 NR SA FR1 event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation	Same as 6.6.17.1	Same as 6.6.17.1
6.6.18.1 NR SA FR1 event-triggered reporting for concurrent gaps non-overlap with SSB-based measurements in both inter-frequency layers	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average Noc_3 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Average $\hat{E}s_3$ / Noc_3 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB Noc_3 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB $\hat{E}s_3$ / Noc_3 ±0.3 dB	Noc_1 is the AWGN on NR freq1 Noc_2 is the AWGN on NR freq2 Noc_3 is the AWGN on NR freq3 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN $\hat{E}s_3$ / Noc_3 is the ratio of cell 3 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.6.18.2 NR SA FR1 event-triggered reporting for concurrent gaps partially-overlap with SSB-based measurements in both inter-frequency layers	Same as 6.6.18.1	Same as 6.6.18.1
6.6.18.3 NR SA FR1 NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1	Freq 1 Noc ±1.5 dB Freq 2 Noc ±1.5 dB Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB	Note: Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 2 signal / AWGN
6.6.18.4 NR SA FR1 event triggered reporting tests for PRS and SSB measurement in FR1 without SSB time index detection when DRX is not used	Freq 1 Noc ±1.5 dB Freq 2 Noc ±1.5 dB Freq 3 Noc ±1.5 dB Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB Ês3 / Noc ±0.3 dB	Note: Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 2 signal / AWGN Ês3 / Noc is the ratio of cell 3 signal / AWGN

6.6.19.1 NR SA FR1 event-triggered reporting tests with NCSG under non-DRX in FR1	Same as 6.6.1.1	Same as 6.6.1.1
6.6.19.2 NR SA FR1 event-triggered reporting tests for FR1 with NCSG for inter-frequency measurement	Same as 6.6.2.1	Same as 6.6.2.1
6.6.19.3 NR SA FR1 NR - E-UTRAN event-triggered reporting in non-DRX in FR1 with NCSG	Same as 6.6.3.1	Same as 6.6.3.1
6.6.19.4 NR SA FR1 Event triggered reporting on SCC with deactivated SCell test with per-UE NCSG under non-DRX	Same as 6.6.1.8	Same as 6.6.1.8
6.6.20.1 UE Rx-Tx time difference measurement with PRS for RTT-based PDC in FR1 SA	Average Noc_1 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB	Noc_1 is the AWGN on NR freq $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.6.21.1 UE Rx-Tx time difference measurement with TRS for RTT-based PDC in FR1 SA	Average Noc_1 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB	Noc_1 is the AWGN on NR freq1 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.6.26.1 Intra-frequency SSB based L1-RSRP measurement	Average Noc ±1.5 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Average $\hat{E}s_2$ / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc ±0.3 dB	Noc is the AWGN on NR freq $\hat{E}s_1$ / Noc is the SNR for the Cell 1 $\hat{E}s_2$ / Noc is the SNR for the Cell 2 Meas PRBs are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.6.27.1 Inter-frequency SSB based L1-RSRP measurement with measurement gap	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on NR freq 1 Noc_2 is the AWGN on NR freq 2 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRBs are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
6.6.28.1 Inter-frequency SSB based L1-RSRP measurement without measurement gap	Same as 6.6.27.1	Same as 6.6.27.1
6.7.1.1.1 NR SA FR1 SS-RSRP absolute measurement accuracy	Average Noc ±1.5 dB Average Ês1 / Noc ±0.3 dB Average Ês2 / Noc ±0.3 dB meas PRB Ês1 / Noc ±0.3 dB meas PRB Ês2 / Noc ±0.3 dB	Noc is the AWGN on NR freq1 Ês1 / Noc is the cell 1 SNR Ês2 / Noc is the cell 2 SNR meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
6.7.1.1.2 NR SA FR1 SS-RSRP relative measurement accuracy	Same as 6.7.1.1.1	Same as 6.7.1.1.1
6.7.1.2.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy	Average Noc1 ±1.5 dB Average Noc2 ±1.5 dB Average Ês1 / Noc1 ±0.3 dB Average Ês2 / Noc2 ±0.3 dB meas PRB Ês1 / Noc1 ±0.3 dB meas PRB Ês2 / Noc2 ±0.3 dB	Noc1 is the AWGN on NR freq1 Noc2 is the AWGN on NR freq2 Ês1 / Noc1 is the cell 2 SNR Ês2 / Noc2 is the cell 3 SNR meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
6.7.1.2.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy	Same as 6.7.1.2.1	Same as 6.7.1.2.1
6.7.2.1 NR SA FR1 SS-RSRQ measurement accuracy	Same as 6.7.1.1.1	Same as 6.7.1.1.1
6.7.2.2.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy	Same as 6.7.1.2.1	Same as 6.7.1.2.1
6.7.2.2.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy	Same as 6.7.1.2.1	Same as 6.7.1.2.1

6.7.3.1 NR SA FR1 SS-SINR measurement accuracy	Same as 6.7.1.1.1	Same as 6.7.1.1.1
6.7.3.2.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy	Same as 6.7.1.2.1	Same as 6.7.1.2.1
6.7.3.2.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy	Same as 6.7.1.2.1	Same as 6.7.1.2.1
6.7.4.1.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy	Average Noc ±1.5 dB Average Ês1 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.8 dB	Noc is the AWGN on NR freq1 Ês2 / Noc is the cell 1 SNR Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
6.7.4.1.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy	Same as 6.7.4.1.1	Same as 6.7.4.1.1
6.7.4.2.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy	Same as 6.7.4.1.1	Same as 6.7.4.1.1
6.7.4.2.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy	Same as 6.7.4.1.1	Same as 6.7.4.1.1
6.7.5.1 NR SA FR1 – E-UTRAN RSRP absolute measurement accuracy	Average Noc ±1.5 dB Average Ês / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB Ês / Noc ±0.8 dB	Noc is the AWGN on E-UTRA freq1 Ês / Noc is the ratio of cell 1 signal / AWGN Meas PRB are the measurement PRB for RSRP #RB_{22} to RB_{27}
6.7.6.1 NR SA FR1 – E-UTRAN RSRQ absolute measurement accuracy	Same as 6.7.5.1	Same as 6.7.5.1
6.7.7.1 NR SA FR1 – E-UTRAN RS-SINR absolute measurement accuracy	Same as 6.7.5.1	Same as 6.7.5.1
6.7.8.1 NR SA FR1 SRS-RSRP measurement accuracy	Averaqe Noc ±1.5 dB Average Ês / Noc ±0.3 dB	Average Noc is the AWGN on virtual UE frequency (NR) on NR freq1 Ês / Noc is the ratio of virtual UE signal / AWGN over the SRS resource RBs
6.7.9.1.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR absolute measurement accuracy	Average Noc ±1.5 dB Average Ês2 / Noc ±0.3 dB Meas PRB Ês2 / Noc ±0.8 dB	Noc is the AWGN on NR freq1 Ês2 / Noc is the SNR for the CSI-RS#0 & CSI-RS#1 Meas PRB is the measurement PRB for CSI-SINR #RB0 to RB275
6.7.9.1.2 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR relative measurement accuracy	Same as 6.7.9.1.1	Same as 6.7.9.1.1
6.7.9.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy	Average Noc ±1.5 dB Average Ês2 / Noc ±0.3 dB Meas PRB Ês2 / Noc ±0.8 dB	Noc is the AWGN on NR freq1 Ês2 / Noc is the SNR for the SSB#0 & SSB#1 Meas PRB is the measurement PRB for SS-SINR #RBJ to RBJ+19
6.7.9.3.1 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR absolute measurement accuracy	Same as 6.7.9.1.1	Same as 6.7.9.1.1
6.7.9.3.2 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR relative measurement accuracy	Same as 6.7.9.1.1	Same as 6.7.9.1.1
6.7.17.1.1 Inter-frequency L1-RSRP absolute accuracy requirements for neighbour cell in FR1	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $Ês_1$ / Noc_1 ±0.3 dB Average $Ês_2$ / Noc_2 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $Ês_1$ / Noc_1 ±0.3 dB Meas PRB $Ês_2$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on NR freq 1 Noc_2 is the AWGN on NR freq 2 $Ês_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $Ês_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRBs are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}

Table F.1.1.2-5: Maximum test system uncertainty for RRM requirements for EN-DC FR2 test cases

Subclause	Maximum Test System Uncertainty[1]	Derivation of Test System Uncertainty
5.3.2.2.1 EN-DC FR2 contention based random access	Average Ês ±6.0 dB Meas PRB Ês ±6.0 dB Uplink absolute power measurement ±6.0 dB Uplink relative power measurement ±FFS dB ±[48]T_c Uplink signal transmit timing relative to downlink	Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19} T_c = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
5.3.2.2.2 EN-DC FR2 non-contention based random access	Same as 5.3.2.2.1	Same as 5.3.2.2.1
5.4.1.1 EN-DC FR2 UE transmit timing accuracy	Noc ±5.65 dB, f<=40.8 GHz $Ês_2$ / N_{oc} ±0.3 dB ±48T_c Uplink signal transmit timing relative to downlink ±40T_c Relative during UE timing adjustment	 $Ês_2$ / Noc is the ratio of cell 2 signal / AWGN T_c = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
5.4.1.2 NR UE Transmit Timing Test with 2-TA for FR2 UE supporting multiDCI-IntraCellMultiTRP-TwoTA-r18	Same as 5.4.1.1	Same as 5.4.1.1
5.4.3.1 EN-DC FR2 UE timing advance adjustment accuracy	Noc ±5.65 dB, f<=40.8 GHz Ês1 / Noc ±0.3 dB ±40Tc timing advance adjustment	 Ês1 / Noc is the ratio of cell 1 signal / AWGN Tc = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
5.5.1.1 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	Average Noc ±5.65 dB, f<=40.8 GHz Average Ês1 / Noc ±0.3 dB Average Ês2 / Noc ±0.3 dB Fading profile ±0.5 dB for 1Tx	Ês1 / Noc is the SNR of RLM-RS1 Ês2 / Noc is the SNR of RLM-RS2
5.5.1.2 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	Same as 5.5.1.1	Same as 5.5.1.1
5.5.1.3 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode	Same as 5.5.1.1	Same as 5.5.1.1
5.5.1.4 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in DRX mode	Same as 5.5.1.1	Same as 5.5.1.1
5.5.1.5 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	Average Noc ±5.65 dB, f<=40.8 GHz Average Ês1 / Noc ±0.3 dB Average Ês2 / Noc ±0.3 dB Fading profile ±0.5 dB for 1Tx	 Ês1 / Noc is the SNR of RLM-RS1 Ês2 / Noc is the SNR of RLM-RS2
5.5.1.6 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	Same as 5.5.1.5	Same as 5.5.1.5
5.5.1.7 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	Same as 5.5.1.5	Same as 5.5.1.5

5.5.1.8 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	Same as 5.5.1.5	Same as 5.5.1.5
5.5.1.9 EN-DC FR2 radio link monitoring UE scheduling restrictions	Average Noc ±5.65 dB, f<=40.8 GHz Average Ês1 / Noc ±0.3 dB Average Ês2 / Noc ±0.3 dB	Ês1 / Noc is the SNR of SSB #0 Ês2 / Noc is the SNR of SSB #1
5.5.1.10 EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion	Same as 5.5.1.1	Same as 5.5.1.1
5.5.2.1 EN-DC FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC	Noc ±5.65 dB, f<=40.8 GHz $\hat{E}s_2 / N_{oc}$ ±0.3 dB	 $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN
5.5.2.2 EN-DC FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC	Same as 5.5.2.1	Same as 5.5.2.1
5.5.2.3 EN-DC FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC	Noc ±5.65 dB, f<=40.8 GHz $\hat{E}s_1 / N_{oc}$ ±0.3 dB $\hat{E}s_2 / N_{oc}$ ±0.3 dB	$\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN
5.5.2.4 EN-DC FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC	Same as 5.5.2.4	Same as 5.5.2.4
5.5.3.1 EN-DC FR2 SCell activation and deactivation intra-band in non-DRX	Average Noc_2 ±5.65 dB Average Noc_3 ±5.65 dB Average $\hat{E}s_2 / N_{oc}$ ±0.3 dB Average $\hat{E}s_3 / N_{oc}$ ±0.3 dB	$\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN $\hat{E}s_3$ / Noc is the ratio of cell 3 signal / AWGN
5.5.3.7 EN-DC FR2 direct SCell activation at SCell addition of known SCell	Same as 5.5.3.1	Same as 5.5.3.1
5.5.3.8 EN-DC FR2 fast SCell Activation of SCell in FR2 intra-band	Average Noc_2 ±5.65 dB Average Noc_3 ±5.65 dB Average $\hat{E}s_2 / N_{oc}$ ±0.3 dB Average $\hat{E}s_3 / N_{oc}$ ±0.3 dB Meas PRB Average Noc_2 ±5.65 dB Meas PRB Average Noc_3 ±5.65 dB Meas PRB Average $\hat{E}s_2 / N_{oc}$ ±0.3 dB Meas PRB Average $\hat{E}s_3 / N_{oc}$ ±0.3 dB	$\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN $\hat{E}s_3$ / Noc is the ratio of cell 3 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19} for CSI-RSRP Meas PRB are # RB_0 to # RB_{274}.
5.5.5.1 EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX	Noc averaged over BW_{Config}, ±5.65 dB, f<=40.8 GHz Noc averaged over measured PRBs, ±5.65 dB, f<=40.8 GHz $\hat{E}s / N_{oc}$ averaged over BW_{Config}: ±0.3 dB $\hat{E}s / N_{oc}$ averaged over measured PRBs: ±0.3 dB Fading profile ±0.7 dB, 2Tx	Noc averaged over BW_{Config} is the AWGN absolute power averaged over BW_{Config} Noc averaged over measured PRBs is the AWGN absolute power averaged over measured PRBs $\hat{E}s / N_{oc}$ averaged over BW_{Config} is the Ratio of cell signal / AWGN averaged over BW_{Config} $\hat{E}s / N_{oc}$ averaged over measured PRBs is the Ratio of cell signal / AWGN averaged over measured PRBs
5.5.5.2 EN-DC FR2 SSB-based beam failure detection and link recovery in DRX	Same as 5.5.5.1	Same as 5.5.5.1
5.5.5.3 EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX	Noc ±5.65 dB, f<=40.8 GHz $\hat{E}s_2 / N_{oc}$ ±0.3 dB Fading profile ±0.7 dB for 2Tx	Note: Noc is the AWGN on cell 2 frequency $\hat{E}s_2$ / Noc is the SNR for the CSI-RS

5.5.5.4 EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX	Same as 5.5.5.3	Same as 5.5.5.3
5.5.5.5 EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX	Same as 5.5.5.1	Same as 5.5.5.1
5.5.5.6 EN-DC FR2 SCell CSI-RS-based beam failure detection and link recovery in non-DRX	Noc ±5.65 dB, f<=40.8 GHz $\hat{E}s_3$ / N_{oc} ±0.3 dB Fading profile ±0.7 dB for 2Tx	Note: Noc is the AWGN on cell 3 frequency $\hat{E}s_3$ / Noc is the SNR for the CSI-RS
5.5.5.7 EN-DC FR2 SCell CSI-RS-based beam failure detection and link recovery in DRX	Same as 5.5.5.6	Same as 5.5.5.6
5.5.5.8 EN-DC FR2 CSI-RS-based PSCell TRP specific Beam Failure Detection and Link Recovery in DRX mode	Same as 5.5.5.3	Same as 5.5.5.3
5.5.5.9 EN-DC FR2 SSB-based beam failure detection and link recovery in DRX mode for UE fulfilling relaxed measurement criterion	Same as 5.5.5.1	Same as 5.5.5.1
5.5.6.2.1 EN-DC FR2 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC	±1.0 dB	Overall system uncertainty for fading conditions comprises two quantities: 1. gNB emulator Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (gNB emulator Signal-to-noise ratio uncertainty ^{2} + (0.25 x AWGN flatness and signal flatness) ^{2}) gNB emulator Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±3.6 dB
5.5.6.3.1 E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs in synchronous EN-DC	Same as 5.5.6.2.1	Same as 5.5.6.2.1
5.5.6.4.1 E-UTRAN – NR FR2 PSCell SCell dormancy switch of single FR2 Scell inside active time	Same as 5.5.6.2.1	Same as 5.5.6.2.1
5.5.7.1 Addition and Release Delay of NR PSCell	Ês averaged over BW ±5.65 dB, f <= 40.8 GHz Ês averaged over measured PRB ±5.65 dB, f <= 40.8 GHz	Ês averaged over BW is the absolute power of cell 2 signal averaged over BW Ês averaged over measured PRB is the absolute power of cell 2 signal averaged over measured PRB
5.5.9.1.1 EN-DC PSCell FR2 uplink spatial relation switch for a known spatial relation	±1.0 dB	The following parameters are proposed to be controlled: - AWGN flatness and signal flatness ±3.6 dB - Signal-to-noise ratio uncertainty ±0.3 dB Test System uncertainty on PSCell = SQRT (0.3^2 + (0.25 * 3.6)^2) = 0.95 dB, rounded to 1.0 dB.
5.5.9.2.1 EN-DC PSCell FR2 uplink spatial relation switch associated with a known DL-RS	Same as 5.5.9.1.1	Same as 5.5.9.1.1

5.5.12.1 EN-DC FR2 PSCell activation and deactivation delay	Average Ês2 ±5.65 dB, f <= 40.8 GHz	Ês2 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
5.5.13.1 EN-DC FR2 Addition and Release Delay of NR PSCell	Ês averaged over BW ±5.65 dB, f <= 40.8 GHz Ês averaged over measured PRB ±5.65 dB, f <= 40.8 GHz	Ês averaged over BW is the absolute power of cell 2 signal averaged over BW Ês averaged over measured PRB is the absolute power of cell 2 signal averaged over measured PRB
5.6.1.1 EN-DC FR2 event-triggered reporting without gap in non-DRX	$Ês_2$ averaged over BW ±5.65 dB, f <= 40.8 GHz $Ês_2$ averaged over measured PRB ±5.65 dB, f <= 40.8 GHz $Ês_3$ averaged over BW ±5.65 dB, f <= 40.8 GHz $Ês_3$ averaged over measured PRB ±5.65 dB, f <= 40.8 GHz	$Ês_2$ averaged over BW is the absolute power of cell 2 signal averaged over BW $Ês_2$ averaged over measured PRB is the absolute power of cell 2 signal averaged over measured PRB $Ês_3$ averaged over BW is the absolute power of cell 3 signal averaged over BW $Ês_3$ averaged over measured PRB is the absolute power of cell 3 signal averaged over measured PRB
5.6.1.2 EN-DC FR2 event-triggered reporting without gap in DRX	Noc ±5.65 dB Ês2 / Noc ±0.3 dB Ês3 / Noc ±0.3 dB	 Ês2 / Noc is the ratio of cell 2 signal / AWGN Ês3 / Noc is the ratio of cell 3 signal / AWGN
5.6.1.3 EN-DC FR2 event-triggered reporting without gap in non-DRX	Same as 5.6.1.1	Same as 5.6.1.1
5.6.1.4 EN-DC FR2 event-triggered reporting with gap in DRX	Same as 5.6.1.2	Same as 5.6.1.2
5.6.2.1 EN-DC FR2-FR2 event-triggered reporting in non-DRX	Average Ês1 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês1 ±5.65 dB, f <= 40.8 GHz Average Ês2 ±5.65 dB Meas PRB Ês2 ±5.65 dB	Ês1 is NR cell 2 signal Ês2 is NR cell 3 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
5.6.2.2 EN-DC FR2-FR2 event-triggered reporting in DRX	Average Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês1 / Noc ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB Average Ês2 / Noc ±0.3 dB Ês2 / Noc over meas PRBs ±0.3 dB	Ês1 is NR cell 2 signal Ês2 is NR cell 3 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
5.6.2.3 EN-DC FR2-FR2 event-triggered reporting in non-DRX with SSB time index detection	Same as 5.6.2.1	Same as 5.6.2.1
5.6.2.4 EN-DC FR2-FR2 event-triggered reporting in DRX with SSB time index detection	Same as 5.6.2.2	Same as 5.6.2.2
5.6.2.5 EN-DC FR1-FR2 event-triggered reporting in non-DRX	Average Ês2 ±5.65, f <= 40.8 GHz	Ês2 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
5.6.2.6 EN-DC FR1-FR2 event-triggered reporting in DRX	Noc ±5.65 dB, f <= 40.8 GHz Ês2 / Noc ±0.3 dB	Ês2 / Noc is the ratio of cell 2 signal / AWGN
5.6.2.7 EN-DC FR1-FR2 event-triggered reporting in non-DRX with SSB time index detection	Same as 5.6.2.5	Same as 5.6.2.5
5.6.2.8 EN-DC FR1-FR2 event-triggered reporting in DRX with SSB time index detection	Same as 5.6.2.6	Same as 5.6.2.6

5.6.3.1 EN-DC FR2 SSB-based L1-RSRP measurement in non-DRX	Average Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês0 / Noc ±0.3 dB Ês0 / Noc over meas PRBs ±0.3 dB Average Ês1 / Noc ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB	Ês0 / Noc is the SNR for the SSB#0 Ês1 / Noc is the SNR for the SSB#1 Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
5.6.3.2 EN-DC FR2 SSB-based L1-RSRP measurement in DRX	Same as 5.6.3.1	Same as 5.6.3.1
5.6.3.3 EN-DC FR2 CSI-RS-based L1-RSRP measurement in non-DRX	Average Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês0 / Noc ±0.3 dB Ês0 / Noc over meas PRBs ±0.3 dB Average Ês1 / Noc ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB	Ês0 / Noc is the SNR for the CSI-RS#0 Ês1 / Noc is the SNR for the CSI-RS#1 Meas PRB is the measurement PRB for CSI-RS-RSRP #RBJ to RBJ+65
5.6.3.4 EN-DC FR2 CSI-RS-based L1-RSRP measurement in DRX	Same as 5.6.3.3	Same as 5.6.3.3
5.6.4.1 EN-DC FR2 SRS-RSRP measurement in non-DRX	Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB	Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell2 signal/AWGN
5.6.6.1 EN-DC FR2 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX	Average Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês0 / Noc ±0.3 dB Ês0 / Noc over meas PRBs ±0.3 dB Average Ês1 / Noc ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB	Ês0 / Noc is the SNR for the CSI-RS#0 Ês1 / Noc is the SNR for the CSI-RS#1 Meas PRB is the measurement PRB for CSI-RS-SINR #RBJ to RBJ+275
5.6.6.2 EN-DC FR2 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX	Average Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês0 / Noc ±0.3 dB Ês0 / Noc over meas PRBs ±0.3 dB Average Ês1 / Noc ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB	Ês0 / Noc is the SNR for the SSB#0 Ês1 / Noc is the SNR for the SSB#1 Meas PRB is the measurement PRB for SS-SINR#RBJ to RBJ+19
5.6.6.3 EN-DC FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX	Same as 5.6.6.1	Same as 5.6.6.1

5.6.8.1 EN-DC event triggered reporting tests for NR FR2 cell when DRX is used	Average Noc_1 ±5.65 dB Average Noc_2 ±5.65 dB Average $\hat{E}s_1 / N_{oc}$ ±0.3 dB Average $\hat{E}s_2 / N_{oc}$ ±0.3 dB Meas PRB Average Noc_1 ±5.65 dB Meas PRB Average Noc_2 ±5.65 dB Meas PRB Average $\hat{E}s_1 / N_{oc}$ ±0.3 dB Meas PRB Average $\hat{E}s_2 / N_{oc}$ ±0.3 dB	$\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19} for CSI-RSRP Meas PRB are # RB_0 to # RB_{274}.
5.7.1.1 EN-DC FR2 SS-RSRP measurement accuracy	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB Meas PRB Ês2 / Noc ±0.3 dB Test 2 Average Ês1 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês1 ±5.65 dB, f <= 40.8 GHz Average Ês2 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês2 ±5.65 dB, f <= 40.8 GHz	Test 1 Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 2 signal / AWGN Ês2 / Noc is the ratio of cell 3 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19 Test 2 Ês1 is NR cell 2 signal Ês2 is NR cell 3 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
5.7.1.2 EN-DC FR2-FR2 SS-RSRP measurement accuracy	Noc1 ±5.65 dB, f <= 40.8 GHz Noc1 over measPRBs ±5.65 dB, f <= 40.8 GHz Noc2 ±5.65 dB, f <= 40.8 GHz Noc2 over measPRBs ±5.65 dB, f <= 40.8 GHz Ês1 / Noc1 ±0.3 dB Ês2 / Noc2 ±0.3 dB Meas PRB Ês1 / Noc1 ±0.3 dB Meas PRB Ês2 / Noc2 ±0.3 dB	Noc1 is the AWGN on the NR freq 1 Noc2 is the AWGN on the NR freq 2 Ês1 / Noc1 is the ratio of cell 2 signal / AWGN Ês2 / Noc2 is the ratio of cell 3 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
5.7.1.3 EN-DC FR1-FR2 SS-RSRP measurement accuracy	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês2 / Noc ±0.3 dB Meas PRB Ês2 / Noc ±0.3 dB Test 2 Average Ês2 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês2 ±5.65 dB, f <= 40.8 GHz	Test 1 Noc is the AWGN on the NR freq Ês2 / Noc is the ratio of cell 3 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19 Test 2 Ês2 is NR cell 3 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
5.7.2.1 EN-DC FR2 SS-RSRQ measurement accuracy	Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB, f <= 40.8 GHz Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB Meas PRB Ês2 / Noc ±0.3 dB	Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 2 signal / AWGN Ês2 / Noc is the ratio of cell 3 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
5.7.2.2 EN-DC FR2-FR2 SS-RSRQ measurement accuracy	Same as 5.7.1.2	Same as 5.7.1.2

5.7.3.1 EN-DC FR2 SS-SINR measurement accuracy	Same as 5.7.2.1	Same as 5.7.2.1
5.7.3.2 EN-DC FR2-FR2 SS-SINR measurement accuracy	Same as 5.7.1.2	Same as 5.7.1.2
5.7.4.1 EN-DC FR2 SSB based L1-RSRP measurement accuracy	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB Test 2 Average Ês1 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês1 ±5.65 dB, f <= 40.8 GHz	Test 1 Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 2 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19 Test 2 Ês1 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
5.7.4.2 EN-DC FR2 CSI-RS based L1-RSRP measurement accuracy	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB Test 2 Average Ês1 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês1 ±5.65 dB, f <= 40.8 GHz	Test 1 Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 2 signal / AWGN Meas PRB is the measurement PRB for CSI-RS-RSRP Test 2 Ês1 is NR cell 2 signal Meas PRB is the measurement PRB for CSI-RS-RSRP
5.7.5.1 EN-DC FR2 SRS-RSRP measurement accuracy	Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB	Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell2 signal/AWGN
5.7.6.1 EN-DC FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB	Test 1 Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 2 signal / AWGN Meas PRB is the measurement PRB for CSI-RS-RSRP
5.7.6.2 EN-DC FR2 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB	Test 1 Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 2 signal / AWGN Meas PRB is the measurement PRB for SSB or CSI-RS
5.7.6.3 EN-DC FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB	Test 1 Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 2 signal / AWGN Meas PRB is the measurement PRB for CSI-RS-RSRP

5.7.7.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB Meas PRB Ês2 / Noc ±0.3 dB Test 2 Average Ês1 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês1 ±5.65 dB, f <= 40.8 GHz Average Ês2 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês2 ±5.65 dB, f <= 40.8 GHz	Test 1 Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 2 signal / AWGN Ês2 / Noc is the ratio of cell 3 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19 or CSI-RS #RB0 to RB274 Test 2 Ês1 is NR cell 2 signal Ês2 is NR cell 3 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19 or CSI-RS #RB0 to RB274
5.7.7.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	Noc1 ±5.65 dB, f <= 40.8 GHz Noc1 over measPRBs ±5.65 dB, f <= 40.8 GHz Noc2 ±5.65 dB, f <= 40.8 GHz Noc2 over measPRBs ±5.65 dB, f <= 40.8 GHz Ês1 / Noc1 ±0.3 dB Ês2 / Noc2 ±0.3 dB Meas PRB Ês1 / Noc1 ±0.3 dB Meas PRB Ês2 / Noc2 ±0.3 dB	Noc1 is the AWGN on the NR freq 1 Noc2 is the AWGN on the NR freq 2 Ês1 / Noc1 is the ratio of cell 2 signal / AWGN Ês2 / Noc2 is the ratio of cell 3 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19 or CSI-RS #RB0 to RB274
5.7.8.1 EN-DC intra-frequency FR2 CSI-RSRQ measurement accuracy	Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB, f <= 40.8 GHz Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB Meas PRB Ês2 / Noc ±0.3 dB	Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 2 signal / AWGN Ês2 / Noc is the ratio of cell 3 signal / AWGN Meas PRB is the measurement PRB for CSI-RSRP
5.7.8.2 EN-DC inter frequency FR2 CSI-RSRQ measurement accuracy	Noc1 ±5.65 dB, f <= 40.8 GHz Noc1 over meas PRBs ±5.65 dB, f <= 40.8 GHz Noc2 ±5.65 dB, f <= 40.8 GHz Noc2 over meas PRBs ±5.65 dB, f <= 40.8 GHz Ês1 / Noc1 ±0.3 dB Ês2 / Noc2 ±0.3 dB Meas PRB Ês1 / Noc1 ±0.3 dB Meas PRB Ês2 / Noc2 ±0.3 dB	Noc1 is the AWGN on the NR freq 1 Noc2 is the AWGN on the NR freq 2 Ês1 / Noc1 is the ratio of cell 2 signal / AWGN Ês2 / Noc2 is the ratio of cell 3 signal / AWGN Meas PRB is the measurement PRB for CSI-RSRP
5.7.9.1 EN-DC intra-frequency FR2 CSI-SINR measurement accuracy	Same as 5.7.8.1	Same as 5.7.8.1
5.7.9.2 EN-DC inter frequency FR2 CSI-SINR measurement accuracy	Same as 5.7.8.2	Same as 5.7.8.2

Table F.1.1.2-6: Maximum test system uncertainty for RRM requirements for SA FR2 test cases

Subclause	Maximum Test System Uncertainty[1]	Derivation of Test System Uncertainty

7.1.1.1 NR SA FR2 cell re-selection	Noc, averaged over BW_{Config}, ±5.65 dB Noc, averaged over Measurement PRB, ±5.65 dB Es_1/Noc averaged over BW_{Config} ±0.3 dB Es_1/Noc averaged over Measurement PRB ±0.3 dB Es_2/Noc averaged over BW_{Config} ±0.3 dB Es_2/Noc averaged over Measurement PRB ±0.3 dB	Noc averaged over BW_{Config} is the AWGN absolute power of RF channel 1 averaged over BW_{Config} Noc averaged over Measurement PRB is the AWGN absolute power of RF channel 1 averaged over Measurement PRB Es_1/Noc averaged over BW_{Config} is Ratio of cell 1 signal / AWGN averaged over BW_{Config} Es_1/Noc averaged over Measurement PRB is Ratio of cell 1 signal / AWGN averaged over Measurement PRB Es_2/Noc averaged over BW_{Config} is Ratio of cell 2 signal / AWGN averaged over BW_{Config} Es_2/Noc averaged over Measurement PRB is Ratio of cell 2 signal / AWGN averaged over Measurement PRB
7.1.1.2 NR SA FR2-FR2 cell re-selection	Noc_1, averaged over BW_{Config}, ±5.65 dB Noc_1, averaged over Measurement PRB, ±5.65 dB Noc_2, averaged over BW_{Config}, ±5.65 dB Noc_2, averaged over Measurement PRB, ±5.65 dB Es_1/Noc_1 averaged over BW_{Config} ±0.3 dB Es_1/Noc_1 averaged over Measurement PRB ±0.3 dB Es_2/Noc_2 averaged over BW_{Config} ±0.3 dB Es_2/Noc_2 averaged over Measurement PRB ±0.3 dB	Noc_1 averaged over BW_{Config} is the AWGN absolute power of RF channel 1 averaged over BW_{Config} Noc_1 averaged over Measurement PRB is the AWGN absolute power of RF channel 1 averaged over Measurement PRB Noc_2 averaged over BW_{Config} is the AWGN absolute power of RF channel 2 averaged over BW_{Config} Noc_2 averaged over Measurement PRB is the AWGN absolute power of RF channel 2 averaged over Measurement PRB Es_1/Noc_1 averaged over BW_{Config} is Ratio of cell 1 signal / AWGN averaged over BW_{Config} Es_1/Noc_1 averaged over Measurement PRB is Ratio of cell 1 signal / AWGN averaged over Measurement PRB Es_2/Noc_2 averaged over BW_{Config} is Ratio of cell 2 signal / AWGN averaged over BW_{Config} Es_2/Noc_2 averaged over Measurement PRB is Ratio of cell 2 signal / AWGN averaged over Measurement PRB
7.1.1.3 NR SA FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	Same as 7.1.1.1	Same as 7.1.1.1
7.1.1.4 NR SA FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	Same as 7.1.1.1	Same as 7.1.1.1
7.1.1.5 NR SA FR2-FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	Same as 7.1.1.2	Same as 7.1.1.2
7.1.1.6 NR SA FR2-FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	Same as 7.1.1.2	Same as 7.1.1.2

7.3.1.2 NR SA FR2 Intra-frequency handover; unknown target cell	Average Noc over BW, ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês1 / Noc over BW, ±0.3 dB, f <= 40.8 GHz Average Ês1 / Noc over meas PRB, ±0.3 dB, f <= 40.8 GHz Average Ês2 / Noc over BW, ±0.3 dB, f <= 40.8 GHz Average Ês2 / Noc over meas PRB, ±0.3 dB, f <= 40.8 GHz	Average Noc over BW is AWGN absolute power averaged over BW. Average Noc over meas PRB is AWGN absolute power averaged over measured PRB. Average Ês1 / Noc over BW is the ratio of cell 1 signal / AWGN averaged over BW Average Ês1 / Noc over measured PRB is the ratio of cell 1 signal / AWGN averaged over measured PRB Average Ês2 / Noc over BW is the ratio of cell 2 signal / AWGN averaged over BW. Average Ês2 / Noc over measured PRB is the ratio of cell 2 signal / AWGN averaged over measured PRB. Ês1 is NR cell 1 signal Ês2 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.3.1.3 NR SA FR2-FR2 Inter-frequency handover; unknown target cell	Average Noc1 over BW ±5.65 dB, f <= 40.8 GHz Noc1 over meas PRBs ±5.65 dB f <= 40.8 GHz Average Noc2 over BW ±5.65 dB, f <= 40.8 GHz Noc2 over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês1 / Noc1 over BW, ±0.3 dB, f <= 40.8 GHz Average Ês1 / Noc1 over meas PRB, ±0.3 dB, f <= 40.8 GHz Average Ês2 / Noc2 over BW, ±0.3 dB, f <= 40.8 GHz Average Ês2 / Noc2 over meas PRB, ±0.3 dB, f <= 40.8 GHz	Average Noc1 over BW is AWGN absolute power averaged over BW on freq 1. Average Noc1 over meas PRB is AWGN absolute power averaged over measured PRB on freq 1. Average Noc2 over BW is AWGN absolute power averaged over BW on freq 2. Average Noc2 over meas PRB is AWGN absolute power averaged over measured PRB on freq 2. Average Ês1 / Noc1 over BW is the ratio of cell 1 signal / AWGN averaged over BW on freq 1. Average Ês1 / Noc1 over measured PRB is the ratio of cell 1 signal / AWGN averaged over measured PRB on freq 1. Average Ês2 / Noc2 over BW is the ratio of cell 2 signal / AWGN averaged over BW on freq 2. Average Ês2 / Noc2 over measured PRB is the ratio of cell 2 signal / AWGN averaged over measured PRB on freq 2. Ês1 is NR cell 1 signal Ês2 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.3.1.4 NR SA FR1-FR2 synchronous DAPS handover	Noc, averaged over BW_{Config}, ±5.65 dB Noc, averaged over Measurement PRB, ±5.65 dB Es_2/Noc averaged over BW_{Config} ±0.3 dB Es_2/Noc averaged over Measurement PRB ±0.3 dB	Noc averaged over BW_{Config} is the AWGN absolute power of RF channel 2 averaged over BW_{Config} Noc averaged over Measurement PRB is the AWGN absolute power of RF channel 2 averaged over Measurement PRB Es_2/Noc averaged over BW_{Config} is Ratio of cell 2 signal / AWGN averaged over BW_{Config} Es_2/Noc averaged over Measurement PRB is Ratio of cell 2 signal / AWGN averaged over Measurement PRB

7.3.1.5 NR SA FR1-FR2 asynchronous DAPS handover	Same as 7.3.1.4	Same as 7.3.1.4
7.3.2.1.1 NR SA FR2 RRC re-establishment	Average Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês1 / Noc ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB Average Ês2 / Noc ±0.3 dB Ês2 / Noc over meas PRBs ±0.3 dB	Ês1 is NR cell 1 signal Ês2 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.3.2.1.2 NR SA FR2 - FR2 RRC re-establishment	Average Noc_1 ±5.65 dB, f <= 40.8 GHz Noc_1 over meas PRBs ±5.65 dB f <= 40.8 GHz Average Noc_2 ±5.65 dB, f <= 40.8 GHz Noc_2 over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês1 / Noc_1 ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB Average Ês2 / Noc_2 ±0.3 dB Ês2 / Noc over meas PRBs ±0.3 dB	Ês1 is NR cell 1 signal Ês2 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.3.2.1.3 NR SA FR2 RRC re-establishment without serving cell timing	Same as 7.3.2.1.1	Same as 7.3.2.1.1
7.3.2.2.1 NR SA FR2 contention based random access	Average Ês ±6.0 dB Meas PRB Ês ±6.0 dB Uplink absolute power measurement ±6.0 dB Uplink relative power measurement ±FFS dB ±[48]T_c Uplink signal transmit timing relative to downlink	Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19} T_c = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
7.3.2.2.2 NR SA FR2 non-contention based random access	Same as 7.3.2.2.1	Same as 7.3.2.2.1
7.3.2.3.1 NR SA FR2-FR2 RRC connection release with redirection	Same as 7.3.1.3	Same as 7.3.1.3
7.3.3.1 NR SA FR2 conditional handover	Noc averaged over BW_{Config}, ±5.65 dB Noc, averaged over Measurement PRB, ±5.65 dB Es_1/Noc averaged over BW_{Config} ±0.3 dB Es_1/Noc averaged over Measurement PRB ±0.3 dB Es_2/Noc ±0.3 dB Noc, averaged over BW_{Config}, ±5.65 dB Es_2/Noc averaged over Measurement PRB ±0.3 dB	Noc averaged over BW_{Config},is the AWGN absolute power of RF channel 1 averaged over BW_{Config}, Noc averaged over Measurement PRB,is the AWGN absolute power of RF channel 1 averaged over Measurement PRB, Es_1/Noc averaged over BW_{Config} is Ratio of cell 1 signal / AWGN averaged over BW_{Config} Es_1/Noc averaged over Measurement PRB is Ratio of cell 1 signal / AWGN averaged over Measurement PRB Es_2/Noc averaged over BW_{Config} is Ratio of cell 2 signal / AWGN averaged over BW_{Config} Es_2/Noc averaged over Measurement PRB is Ratio of cell 2 signal / AWGN averaged over Measurement PRB

7.4.1.1 SA FR2 UE transmit timing accuracy	Noc ±5.65 dB $\hat{E}s_1$ / N_{oc} ±0.3 dB ±48T_c Uplink signal transmit timing relative to downlink ±40T_c Relative during UE timing adjustment	$\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN T_c = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
7.4.1.3 SA FR2 UE transmit timing accuracy	Noc ±5.65 dB $\hat{E}s_1$ / N_{oc} ±0.3 dB ±48T_c Uplink signal transmit timing relative to downlink ±40T_c Relative during UE timing adjustment	$\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN T_c = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
7.4.3.1 NR SA FR2 UE timing advance adjustment accuracy	Noc ±5.65 dB Ês1 / Noc ±0.3 dB ±40Tc timing advance adjustment	Ês1 / Noc is the ratio of cell 1 signal / AWGN Tc = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
7.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode	Same as 5.5.1.1	Same as 5.5.1.1
7.5.1.2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode	Same as 5.5.1.1	Same as 5.5.1.1
7.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode	Same as 5.5.1.1	Same as 5.5.1.1
7.5.1.4 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode	Same as 5.5.1.1	Same as 5.5.1.1
7.5.1.9 EN-DC FR2 radio link monitoring UE scheduling restrictions	Same as 5.5.1.1	Same as 5.5.1.1
7.5.3.4 NR SA FR2 direct SCell activation at SCell addition of known SCell	Average Noc1 ±5.65 dB Average Noc2 ±5.65 dB Average Ês1 / Noc1 ±0.3 dB Average Ês2 / Noc2 ±0.3 dB	Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Ês2 / Noc2 is the ratio of cell 2 signal / AWGN
7.5.3.5 NR SA FR2 direct SCell activation at handover with known SCell	Average Noc1 ±5.65 dB Average Noc2 ±5.65 dB Average Ês1 / Noc ±0.3 dB Average Ês2 / Noc ±0.3 dB Average Ês3 / Noc ±0.3 dB	Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Ês2 / Noc1 is the ratio of cell 2 signal / AWGN Ês3 / Noc2 is the ratio of cell 3 signal / AWGN
7.5.3.13 NR SA FR2 SCell Activation of SCell in FR2 intra-band in non-DRX	Average Noc_1 ±5.65 dB Average Noc_2 ±5.65 dB Average $\hat{E}s_1$ / N_{oc} ±0.3 dB Average $\hat{E}s_2$ / N_{oc} ±0.3 dB Meas PRB Average Noc_1 ±5.65 dB Meas PRB Average Noc_2 ±5.65 dB Meas PRB Average $\hat{E}s_1$ / N_{oc} ±0.3 dB Meas PRB Average $\hat{E}s_2$ / N_{oc} ±0.3 dB	$\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19} for CSI-RSRP Meas PRB are # RB_0 to # RB_{274}.

7.5.3.14 NR SA FR2 SCell Activation for known SCell in FR2 inter-band	Noc1 averaged over BW_{Config}, ±5.65 dB Noc1, averaged over Measurement PRB, ±5.65 dB Noc2 averaged over BW_{Config}, ±5.65 dB Noc2, averaged over Measurement PRB, ±5.65 dB Es_1/Noc1 averaged over BW_{Config} ±0.3 dB Es_1/Noc1 averaged over Measurement PRB ±0.3 dB Es_2/Noc2 ±0.3 dB Noc, averaged over BW_{Config}, ±5.65 dB Es_2/Noc2 averaged over Measurement PRB ±0.3 dB	Noc1 averaged over BW_{Config},is the AWGN absolute power of RF channel 1 averaged over BW_{Config} Noc1 averaged over Measurement PRB,is the AWGN absolute power of RF channel 1 averaged over Measurement PRB Noc2 averaged over BW_{Config},is the AWGN absolute power of RF channel 2 averaged over BW_{Config}, Noc2 averaged over Measurement PRB,is the AWGN absolute power of RF channel 2 averaged over Measurement PRB, Es_1/Noc averaged over BW_{Config} is Ratio of cell 1 signal / AWGN averaged over BW_{Config} Es_1/Noc averaged over Measurement PRB is Ratio of cell 1 signal / AWGN averaged over Measurement PRB Es_2/Noc averaged over BW_{Config} is Ratio of cell 2 signal / AWGN averaged over BW_{Config} Es_2/Noc averaged over Measurement PRB is Ratio of cell 2 signal / AWGN averaged over Measurement PRB
7.5.5.1 NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX	Same as 5.5.5.1	Same as 5.5.5.1
7.5.5.2 NR SA FR2 SSB-based beam failure detection and link recovery in DRX	Same as 5.5.5.1	Same as 5.5.5.1
7.5.5.3 NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX	Noc ±5.65 dB, f<=40.8 GHz $\hat{E}s_1 / N_{oc}$ ±0.3 dB Fading profile ±0.7 dB for 2Tx	Note: Noc is the AWGN on cell 1 frequency $\hat{E}s_1$ / Noc is the SNR for the CSI-RS
7.5.5.4 NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX	Same as 7.5.5.3	Same as 7.5.5.3
7.5.5.5 NR SA FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX	Same as 5.5.5.1	Same as 5.5.5.1
7.5.5.6 NR SA FR2 SCell CSI-RS-based beam failure detection and link recovery in non-DRX	Noc ±5.65 dB, f<=40.8 GHz $\hat{E}s_2 / N_{oc}$ ±0.3 dB Fading profile ±0.7 dB for 2Tx	Note: Noc is the AWGN on cell 2 frequency $\hat{E}s_2$ / Noc is the SNR for the CSI-RS
7.5.5.7 NR SA FR2 SCell CSI-RS-based beam failure detection and link recovery in DRX	Same as 7.5.5.6	Same as 7.5.5.6
7.5.5.9 NR SA FR2 SCell TRP specific CSI-RS-based Beam Failure Detection and Link Recovery in DRX	Same as 7.5.5.6	Same as 7.5.5.6
7.5.5.10 NR SA FR2 PCell TRP specific SSB-based Beam Failure Detection and Link Recovery in non-DRX	Same as 5.5.5.1	Same as 5.5.5.1

7.5.6.2.1 NR SA FR2 RRC-based DL active BWP switch in non-DRX	±1.0 dB	Overall system uncertainty for fading conditions comprises two quantities: 1. gNB emulator Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (gNB emulator Signal-to-noise ratio uncertainty ^{2} + (0.25 x AWGN flatness and signal flatness) ^{2}) gNB emulator Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±3.6 dB
7.5.8.1.1 NR SA PCell FR2 MAC-CE based active TCI state switch for a known TCI state	Noc ±5.65 dB, f<=40.8 GHz $\hat{E}s_1 / N_{oc}$ ±0.3 dB $\hat{E}s_2 / N_{oc}$ ±0.3 dB No fading	Noc is the AWGN on cell 1 and 2 frequency $\hat{E}s_1$ / Noc is Ratio of cell 1 signal / AWGN averaged over BW $\hat{E}s_2$ / Noc is Ratio of cell 2 signal / AWGN averaged over BW
7.5.8.2.1 NR SA Pcell FR2 RRC based active TCI state switch for a known TCI state	Same as 7.5.8.1.1	Same as 7.5.8.1.1
7.5.9.1.1 EN-DC PSCell FR2 uplink spatial relation switch for a known spatial relation	±1.0 dB	The following parameters are proposed to be controlled: - AWGN flatness and signal flatness ±3.6 dB - Signal-to-noise ratio uncertainty ±0.3 dB Test System uncertainty on PSCell = SQRT (0.3^2 + $(0.25 * 3.6)^2$) = 0.95 dB, rounded to 1.0 dB.
7.5.9.2.1 EN-DC PSCell FR2 uplink spatial relation switch associated with a known DL-RS	Same as 7.5.9.1.1	Same as 7.5.9.1.1
7.5.11.1 UE UL carrier RRC reconfiguration delay	Noc ±5.65 dB, f<=40.8 GHz $\hat{E}s_1 / N_{oc}$ ±0.3 dB $\hat{E}s_2 / N_{oc}$ ±0.3 dB No fading	Note: Noc is the AWGN on cell 1 and 2 frequencies $\hat{E}s_1$ / Noc is Ratio of cell 1 signal / AWGN averaged over BW $\hat{E}s_2$ / Noc is Ratio of cell 2 signal / AWGN averaged over BW
7.5.12.1 Addition and Release Delay of PSCell	Ês averaged over BW ±5.65 dB, f <= 40.8 GHz Ês averaged over measured PRB ±5.65 dB, f <= 40.8 GHz	Ês averaged over BW is the absolute power of cell 2 signal averaged over BW Ês averaged over measured PRB is the absolute power of cell 2 signal averaged over measured PRB

7.5.13.6.1 NR SA FR2 MAC-CE based active uplink TCI state switch for 2 known TCI states	Average Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês0 / Noc ±0.3 dB Ês0 / Noc over meas PRBs ±0.3 dB Average Ês1 / Noc ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB Average Ês2 / Noc ±0.3 dB Ês2 / Noc over meas PRBs ±0.3 dB Average Ês3 / Noc ±0.3 dB Ês3 / Noc over meas PRBs ±0.3 dB	Ês0 / Noc is the SNR for the SSB#0 Ês1 / Noc is the SNR for the SSB#1 Ês2 / Noc is the SNR for the SSB#2 Ês3 / Noc is the SNR for the SSB#3 Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19 for 120kHz SCS_{SSB}
7.5.14 NR SA FR2 PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2	Noc averaged over BW_{Config}, ±5.65 dB Noc, averaged over Measurement PRB, ±5.65 dB Es/Noc averaged over BW_{Config} ±0.3 dB Es/Noc averaged over Measurement PRB ±0.3 dB	Noc averaged over BW_{Config},is the AWGN absolute power of RF channel 2 averaged over BW_{Config} Noc averaged over Measurement PRB,is the AWGN absolute power of RF channel 2 averaged over Measurement PRB Es/Noc averaged over BW_{Config} is Ratio of cell 2 signal / AWGN averaged over BW_{Config} Es/Noc averaged over Measurement PRB is Ratio of cell 2 signal / AWGN averaged over Measurement PRB
7.6.1.1 NR SA FR2 event-triggered reporting without gap in non-DRX	$\hat{E}s_1$ averaged over BW ±5.65 dB, f <= 40.8 GHz $\hat{E}s_1$ averaged over measured PRB ±5.65 dB, f <= 40.8 GHz $\hat{E}s_2$ averaged over BW ±5.65 dB, f <= 40.8 GHz $\hat{E}s_2$ averaged over measured PRB ±5.65 dB, f <= 40.8 GHz	$\hat{E}s_1$ averaged over BW is the absolute power of cell 1 signal averaged over BW $\hat{E}s_1$ averaged over measured PRB is the absolute power of cell 1 signal averaged over measured PRB $\hat{E}s_2$ averaged over BW is the absolute power of cell 2 signal averaged over BW $\hat{E}s_2$ averaged over measured PRB is the absolute power of cell 2 signal averaged over measured PRB
7.6.1.2 NR SA FR2 event-triggered reporting without gap in DRX	Noc averaged over BW, ±5.65 dB, f <= 40.8 GHz Noc averaged over measured PRB, ±5.65 dB, f <= 40.8 GHz Ês1 / Noc averaged over BW, ±0.3 dB, f <= 40.8 GHz Ês1 / Noc averaged over measured PRB, ±0.3 dB, f <= 40.8 GHz Ês2 / Noc averaged over BW, ±0.3 dB, f <= 40.8 GHz Ês2 / Noc averaged over measured PRB, ±0.3 dB, f <= 40.8 GHz	Noc averaged over BW is AWGN absolute power averaged over BW. Noc averaged over measured PRB is AWGN absolute power averaged over measured PRB. Ês1 / Noc averaged over BW is the ratio of cell 1 signal / AWGN averaged over BW Ês1 / Noc averaged over measured PRB is the ratio of cell 1 signal / AWGN averaged over measured PRB Ês2 / Noc averaged over BW is the ratio of cell 2 signal / AWGN averaged over BW. Ês2 / Noc averaged over measured PRB is the ratio of cell 2 signal / AWGN averaged over measured PRB.
7.6.1.3 NR SA FR2 event-triggered reporting without gap in non-DRX	Same as 7.6.1.1	Same as 7.6.1.1
7.6.1.4 NR SA FR2 event-triggered reporting with gap in DRX	Same as 7.6.1.2	Same as 7.6.1.2

7.6.2.1 NR SA FR2-FR2 event-triggered reporting in non-DRX	Average Ês1 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês1 ±5.65 dB, f <= 40.8 GHz Average Ês2 ±5.65 dB Meas PRB Ês2 ±5.65 dB	Ês1 is NR cell 1 signal Ês2 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.6.2.2 NR SA FR2-FR2 event-triggered reporting in DRX	Average Noc_1 ±5.65 dB, f <= 40.8 GHz Noc_1 over meas PRBs ±5.65 dB f <= 40.8 GHz Average Noc_2 ±5.65 dB, f <= 40.8 GHz Noc_2 over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês1 / Noc_1 ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB Average Ês2 / Noc_2 ±0.3 dB Ês2 / Noc_2 over meas PRBs ±0.3 dB	Ês1 is NR cell 1 signal Ês2 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.6.2.3 NR SA FR2-FR2 event-triggered reporting in non-DRX with SSB time index detection	Same as 7.6.2.1	Same as 7.6.2.1
7.6.2.4 NR SA FR2-FR2 event-triggered reporting in DRX with SSB time index detection	Same as 7.6.2.2	Same as 7.6.2.2
7.6.2.5 NR SA FR1-FR2 event-triggered reporting in non-DRX	Average Ês2 ±5.65 dB, f <= 40.8 GHz	Ês2 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.6.2.6 NR SA FR1-FR2 event-triggered reporting in DRX	Noc ±5.65 dB, f <= 40.8 GHz Ês2 / Noc ±0.3 dB	Ês2 / Noc is the ratio of cell 2 signal / AWGN
7.6.2.7 NR SA FR1-FR2 event-triggered reporting in non-DRX with SSB time index detection	Same as 7.6.2.5	Same as 7.6.2.5
7.6.2.8 NR SA FR1-FR2 event-triggered reporting in DRX with SSB time index detection	Same as 7.6.2.6	Same as 7.6.2.6
7.6.2.10	Same as 7.6.2.2	Same as 7.6.2.2
7.6.2.11	Same as 7.6.2.2	Same as 7.6.2.2
7.6.3.1 NR SA FR2 SSB-based L1-RSRP measurement in non-DRX	Average Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês0 / Noc ±0.3 dB Ês0 / Noc over meas PRBs ±0.3 dB Average Ês1 / Noc ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB	Ês0 / Noc is the SNR for the SSB#0 Ês1 / Noc is the SNR for the SSB#1 Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.6.3.2 NR SA FR2 SSB-based L1-RSRP measurement in DRX	Same as 7.6.3.1	Same as 7.6.3.1
7.6.3.3 NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX	Average Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês0 / Noc ±0.3 dB Ês0 / Noc over meas PRBs ±0.3 dB Average Ês1 / Noc ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB	Ês0 / Noc is the SNR for the CSI-RS#0 Ês1 / Noc is the SNR for the CSI-RS#1 Meas PRB is the measurement PRB for CSI-RS-RSRP

7.6.3.4 NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX	Same as 7.6.3.3	Same as 7.6.3.3
7.6.3.6 NR SA FR2 Inter-cell SSB based L1-RSRP measurements on FR2 SCell when DRX is not used	Same as 7.6.6.2	Same as 7.6.6.2
7.6.4.1 NR SA FR2 SRS-RSRP measurement in non-DRX	Same as 5.6.4.1	Same as 5.6.4.1
7.6.6.1 NR SA FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	Average Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês0 / Noc ±0.3 dB Ês0 / Noc over meas PRBs ±0.3 dB Average Ês1 / Noc ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB	Ês0 / Noc is the SNR for the CSI-RS#0 Ês1 / Noc is the SNR for the CSI-RS#1 Meas PRB is the measurement PRB for CSI-RS-SINR #RBJ to RBJ+275
7.6.6.2 NR SA FR2 SSB based CMR and dedicated IMR L1-SINR measurement accuracy	Average Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Average Ês0 / Noc ±0.3 dB Ês0 / Noc over meas PRBs ±0.3 dB Average Ês1 / Noc ±0.3 dB Ês1 / Noc over meas PRBs ±0.3 dB	Ês0 / Noc is the SNR for the SSB#0 Ês1 / Noc is the SNR for the SSB#1 Meas PRB is the measurement PRB for SS-SINR #RBJ to RBJ+19
7.6.6.3 NR SA FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	Same as 7.6.6.1	Same as 7.6.6.1
7.6.13.1 NR SA FR2 UE Rx-Tx time difference measurement for propagation delay compensation using PRS	Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB	Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 1 signal / AWGN Meas PRB is the measurement PRB for PRS-RSRP #RBJ to RBJ+19
7.6.13.2 NR SA FR2 UE Rx-Tx time difference measurement for propagation delay compensation using TRS	Same as 7.6.13.1	Same as 7.6.13.1
7.6.14.1 NR SA FR2 event triggered reporting tests with pre-configured measurement gaps and autonomous activation/deactivation	$Ês_1$ averaged over BW ±5.65 dB, f <= 40.8 GHz $Ês_1$ averaged over measured PRB ±5.65 dB, f <= 40.8 GHz $Ês_2$ averaged over BW ±5.65 dB, f <= 40.8 GHz $Ês_2$ averaged over measured PRB ±5.65 dB, f <= 40.8 GHz	$Ês_1$ averaged over BW is the absolute power of cell 1 signal averaged over BW $Ês_1$ averaged over measured PRB is the absolute power of cell 1 signal averaged over measured PRB $Ês_2$ averaged over BW is the absolute power of cell 2 signal averaged over BW $Ês_2$ averaged over measured PRB is the absolute power of cell 2 signal averaged over measured PRB
7.6.14.2 NR SA FR2 event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation	Same as 7.6.14.1	Same as 7.6.14.1

7.6.15.1 NR SA FR2 SA event triggered reporting tests with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements	$\hat{E}s_1$ averaged over BW ±5.65 dB, f <= 40.8 GHz $\hat{E}s_1$ averaged over measured PRB ±5.65 dB, f <= 40.8 GHz $\hat{E}s_2$ averaged over BW ±5.65 dB, f <= 40.8 GHz $\hat{E}s_2$ averaged over measured PRB ±5.65 dB, f <= 40.8 GHz $\hat{E}s_3$ averaged over BW ±5.65 dB, f <= 40.8 GHz $\hat{E}s_3$ averaged over measured PRB ±5.65 dB, f <= 40.8 GHz	$\hat{E}s_1$ averaged over BW is the absolute power of cell 1 signal averaged over BW $\hat{E}s_1$ averaged over measured PRB is the absolute power of cell 1 signal averaged over measured PRB $\hat{E}s_2$ averaged over BW is the absolute power of cell 2 signal averaged over BW $\hat{E}s_2$ averaged over measured PRB is the absolute power of cell 2 signal averaged over measured PRB $\hat{E}s_3$ averaged over BW is the absolute power of cell 2 signal averaged over BW $\hat{E}s_3$ averaged over measured PRB is the absolute power of cell 2 signal averaged over measured PRB
7.6.15.2 NR SA FR2 event triggered reporting tests with concurrent measurement gaps without SSB time index detection when DRX is not used (PCell in FR2)	Same as 7.6.15.1	Same as 7.6.15.1
7.6.15.3 NR SA FR2 event triggered reporting tests with concurrent measurement gaps with partially partial overlapping scenario for SSB-based measurements and PRS-based measurement	Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz $\hat{E}s_1$ / Noc ±0.3 dB $\hat{E}s_2$ / Noc ±0.3 dB $\hat{E}s_3$ / Noc ±0.3 dB Meas PRB $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc ±0.3 dB Meas PRB $\hat{E}s_3$ / Noc ±0.3 dB	Noc is the AWGN on the NR freq 1 and 2 $\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN $\hat{E}s_3$ / Noc is the ratio of cell 3 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
7.6.16.1 NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX	Same as 7.6.1.1	Same as 7.6.1.1
7.6.16.2 NR SA FR2 event triggered reporting tests on inter-frequency measurement with NCSG when DRX is not used(PCell in FR2)	Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz $\hat{E}s_1$ / Noc ±0.3 dB $\hat{E}s_2$ / Noc ±0.3 dB Meas PRB $\hat{E}s_1$ / Noc ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc ±0.3 dB	Noc is the AWGN on the NR freq 1 and 2 $\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
7.6.16.3 NR SA FR2 event triggered reporting tests on deactivated SCell measurement via NCSG in non-DRX	$\hat{E}s_2$ averaged over BW ±5.65 dB, f <= 40.8 GHz $\hat{E}s_2$ averaged over measured PRB ±5.65 dB, f <= 40.8 GHz $\hat{E}s_3$ averaged over BW ±5.65 dB, f <= 40.8 GHz $\hat{E}s_3$ averaged over measured PRB ±5.65 dB, f <= 40.8 GHz	$\hat{E}s_2$ averaged over BW is the absolute power of cell 2 signal averaged over BW $\hat{E}s_2$ averaged over measured PRB is the absolute power of cell 2 signal averaged over measured PRB $\hat{E}s_3$ averaged over BW is the absolute power of cell 3 signal averaged over BW $\hat{E}s_3$ averaged over measured PRB is the absolute power of cell 3 signal averaged over measured PRB

7.7.1.1 NR SA FR2 SS-RSRP measurement accuracy	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB Meas PRB Ês2 / Noc ±0.3 dB Test 2 Average Ês1 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês1 ±5.65 dB, f <= 40.8 GHz Average Ês2 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês2 ±5.65 dB, f <= 40.8 GHz	Test 1 Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 1 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19 Test 2 Ês1 is NR cell 1 signal Ês2 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.7.1.2 NR SA FR2-FR2 SS-RSRP measurement accuracy	Noc1 ±5.65 dB, f <= 40.8 GHz Noc1 over measPRBs ±5.65 dB, f <= 40.8 GHz Noc2 ±5.65 dB, f <= 40.8 GHz Noc2 over measPRBs ±5.65 dB, f <= 40.8 GHz Ês1 / Noc1 ±0.3 dB Ês2 / Noc2 ±0.3 dB Meas PRB Ês1 / Noc1 ±0.3 dB Meas PRB Ês2 / Noc2 ±0.3 dB	Noc1 is the AWGN on the NR freq 1 Noc2 is the AWGN on the NR freq 2 Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Ês2 / Noc2 is the ratio of cell 2 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.7.1.3 NR SA FR1-FR2 SS-RSRP measurement accuracy	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês2 / Noc ±0.3 dB Meas PRB Ês2 / Noc ±0.3 dB Test 2 Average Ês2 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês2 ±5.65 dB, f <= 40.8 GHz	Test 1 Noc is the AWGN on the NR freq Ês2 / Noc is the ratio of cell 1 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19 Test 2 Ês2 is NR cell 2 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.7.2.1 NR SA FR2 SS-RSRQ measurement accuracy	Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB, f <= 40.8 GHz Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB Meas PRB Ês2 / Noc ±0.3 dB	Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 2 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.7.2.2 NR SA FR2-FR2 SS-RSRQ measurement accuracy	Same as 7.7.1.2	Same as 7.7.1.2
7.7.3.1 NR SA FR2 SS-SINR measurement accuracy	Same as 7.7.2.1	Same as 7.7.2.1
7.7.3.3 NR SA FR2-FR2 SS-SINR measurement accuracy	Same as 7.7.1.2	Same as 7.7.1.2

7.7.4.1 NR SA FR2 SSB based L1-RSRP measurement accuracy	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB Test 2 Average Ês1 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês1 ±5.65 dB, f <= 40.8 GHz	Test 1 Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 1 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19 Test 2 Ês1 is NR cell 1 signal Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
7.7.4.2 NR SA FR2 CSI-RS based L1-RSRP measurement accuracy	Test 1 Noc ±5.65 dB, f <= 40.8 GHz Noc over meas PRBs ±5.65 dB f <= 40.8 GHz Ês1 / Noc ±0.3 dB Meas PRB Ês1 / Noc ±0.3 dB Test 2 Average Ês1 ±5.65 dB, f <= 40.8 GHz Meas PRB Ês1 ±5.65 dB, f <= 40.8 GHz	Test 1 Noc is the AWGN on the NR freq Ês1 / Noc is the ratio of cell 1 signal / AWGN Meas PRB is the measurement PRB for CSI-RS-RSRP Test 2 Ês1 is NR cell 1 signal Meas PRB is the measurement PRB for CSI-RS-RSRP
7.7.5.1 NR SA FR2 SRS-RSRP measurement accuracy	Same as 5.7.5.1	Same as 5.7.5.1
7.7.6.1 NR SA FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	Same as 7.6.6.1	Same as 7.6.6.1
7.7.6.2 NR SA FR2 SSB based CMR and dedicated IMR L1-SINR measurement accuracy	Same as 7.6.6.2	Same as 7.6.6.2
7.7.6.3 NR SA FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	Same as 7.6.6.1	Same as 7.6.6.1
7.7.8.1 NR SA intra-frequency FR2 CSI-RSRQ measurement accuracy	Same as 5.7.8.1	Same as 5.7.8.1
7.7.8.2 NR SA inter frequency FR2 CSI-RSRQ measurement accuracy	Same as 5.7.8.2	Same as 5.7.8.2
7.7.9.1 NR SA intra-frequency FR2 CSI-SINR measurement accuracy	Same as 5.7.9.1	Same as 5.7.9.1
7.7.9.2 NR SA inter frequency FR2 CSI-SINR measurement accuracy	Same as 5.7.9.2	Same as 5.7.9.2

Table F.1.1.2-7: Maximum test system uncertainty for RRM requirements for E-UTRA – NR inter-RAT test cases with E-UTRA serving cell

Subclause	Maximum Test System Uncertainty[1]	Derivation of Test System Uncertainty
8.2.1.1 E-UTRA – NR FR1 cell re-selection to higher priority NR target cell	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $Ês_1$ / Noc_1 ±0.3 dB Average $Ês_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $Ês_2$ / Noc_2 ±0.3 dB	Note: Noc_1 is the AWGN on cell 1 frequency Noc_2 is the AWGN on cell 2 frequency $Ês_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $Ês_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB on cell 2 are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}

8.2.1.2 E-UTRA – NR FR1 Cell reselection to lower priority NR target Cell in FR1 for UE configured with highSpeedInterRAT-NR-r16	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Note: Noc_1 is the AWGN on cell 1 frequency Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB on cell 2 are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
8.2.2.1 E-UTRA – NR FR1 Early Measurement Reporting	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Note: Noc_1 is the AWGN on cell 1 frequency Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB on cell 2 are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
8.2.2.2 E-UTRA – NR FR2 Early Measurement Reporting	Average Noc_1 ±5.65 dB Average Noc_2 ±5.65 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±5.65 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on cell 1 frequency Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB is the measurement PRB for SS-RSRP #$RB_{J\ to\ RBJ+19}$
8.3.1.1 E-UTRA – NR FR1 handover with known target cell	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Note: Noc_1 is the AWGN on cell 1 frequency Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB on cell 2 are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
8.4.1.1 E-UTRA – NR FR1 SFTD measurement delay in non-DRX	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Note: Noc_1 is the AWGN on cell 1 frequency Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB on cell 2 are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
8.4.1.2 E-UTRA – NR FR1 SFTD measurement delay in DRX	Same as 8.4.1.1	Same as 8.4.1.1
8.4.2.1 E-UTRA event-triggered reporting of a NR FR1 neighbour cell without SSB time index detection in non-DRX	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Note: Noc_1 is the AWGN on cell 1 frequency Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB on cell 2 are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
8.4.2.2 E-UTRA event-triggered reporting of a NR FR1 neighbour cell without SSB time index detection in DRX	Same as 8.4.2.1	Same as 8.4.2.1
8.4.2.3 E-UTRA event-triggered reporting of a NR FR1 neighbour cell with SSB time index detection in non-DRX	Same as 8.4.2.1	Same as 8.4.2.1
8.4.2.4 E-UTRA event-triggered reporting of a NR FR1 neighbour cell with SSB time index detection in DRX	Same as 8.4.2.1	Same as 8.4.2.1
8.4.2.5 E-UTRA event-triggered reporting of a NR FR2 neighbour cell without SSB time index detection in non-DRX	Average Noc_2 ±5.65 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±5.65 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB on cell 2 are the measurement PRB for SS-RSRP #$RB_{J\ to\ RBJ+19}$
8.4.2.6 E-UTRA event-triggered reporting of a NR FR2 neighbour cell without SSB time index detection in DRX	Average Noc_2 ±5.65 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±5.65 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB on cell 2 are the measurement PRB for SS-RSRP #$RB_{J\ to\ RBJ+19}$

8.4.2.7 E-UTRA event-triggered reporting of a NR FR2 neighbour cell with SSB time index detection in non-DRX	Same as 8.4.2.6	Same as 8.4.2.6
8.4.2.8 E-UTRA event-triggered reporting of a NR FR2 neighbour cell with SSB time index detection in DRX	Same as 8.4.2.6	Same as 8.4.2.6
8.4.2.9 E-UTRA – NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection in DRX for UE configured with highSpeedInterRAT-NR-r16	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB
8.5.1.1 E-UTRA – NR FR1 SFTD measurement accuracy	Average $\hat{E}s_1$ / Noc_1 ±0.8 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.8 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	$\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB on cell 2 are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
8.5.2.1.1.1 E-UTRA SS-RSRP absolute measurement accuracy of a NR FR1 neighbour cell	Average Noc ±1.5 dB Noc over meas PRBs #RB_{J-J+19} ±1.5 dB Average $\hat{E}s$ / Noc ±0.3 dB meas PRB $\hat{E}s1$ / Noc1 ±0.8 dB	Noc is the AWGN on the NR freq $\hat{E}s$ / Noc is the cell SNR meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
8.5.2.1.2 E-UTRA SS-RSRP absolute measurement accuracy of a NR FR2 neighbour cell	<u>Test 1</u> Average Noc ±5.65 dB Noc over meas PRBs ±5.65 dB Average $\hat{E}s$ / Noc ±0.3 dB $\hat{E}s$ / Noc over meas PRBs ±0.3 dB <u>Test 2</u> Average Es ±5.65 dB Es over meas PRBs ±5.65 dB	<u>Test 1</u> Noc is the AWGN on the NR freq $\hat{E}s$ / Noc is the cell SNR meas PRB is the measurement PRB for SS-RSRP #$RB_{J\ to\ RBJ+19}$
8.5.2.2.1 E-UTRA SS-RSRQ absolute measurement accuracy of a NR FR1 neighbour cell	Same as 8.5.2.1.1.1	Same as 8.5.2.1.1.1
8.5.2.2.2 E-UTRA SS-RSRQ absolute measurement accuracy of a NR FR2 neighbour cellA	Same as 8.5.2.1.2	Same as 8.5.2.1.2
8.5.2.3.1 E-UTRA SS-SINR absolute measurement accuracy of a NR FR1 neighbour cell	Same as 8.5.2.1.1.1	Same as 8.5.2.1.1.1
8.5.2.3.2 E-UTRA SS-SINR absolute measurement accuracy of a NR FR2 neighbour cell	Same as 8.5.2.1.2	Same as 8.5.2.1.2

Table F.1.1.2-8: Maximum test system uncertainty for RRM requirements for FR1 NR sidelink test cases

Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty
9.1.1.1 NR SA FR1 UE transmit timing accuracy for GNSS as synchronization reference source	Sidelink signal transmit timing relative to GNSS timing: ±192 Tc	Tc is the basic timing unit defined in TS 38.211 [7], Tc = 1/(480000 x 4096) seconds

9.1.1.2 NR SA FR1 UE transmit timing accuracy for SyncRef UE as synchronization reference source	Sidelink signal transmit timing relative to SyncRef UE: ±128 Tc for SL SCS = 30kHz Average Noc: ±1.5 dB Average $\hat{E}s_1$ / Noc: ±0.3 dB Meas PRB Noc: ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc: ±0.3 dB	Tc is the basic timing unit defined in TS 38.211 [7], Tc = 1/(480000 x 4096) seconds Noc is the AWGN absolute power on PC5 carrier. $\hat{E}s_1$ / Noc is the ratio of SyncRef UE 1 signal / AWGN Meas PRB is the meaurement PRB for PSBCH-RSRP #RB_J to RB_{J+10}
9.1.1.3 NR SA FR1 UE transmit timing accuracy for FR1 NR cell as synchronization reference source	Sidelink signal transmit timing relative to downlink timing: ±192 Tc for DL SCS = 15kHz and SL SCS = 30kHz ±160 Tc for DL SCS = 30kHz and SL SCS = 30kHz Average Noc: ±1.5 dB Average $\hat{E}s_1$ / Noc: ±0.3 dB Meas PRB Noc: ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc: ±0.3 dB	Tc is the basic timing unit defined in TS 38.211 [7], Tc = 1/(480000 x 4096) seconds Noc is the AWGN absolute power on Uu carrier. $\hat{E}s_1$ / Noc is the ratio of Cell 1 signal / AWGN Meas PRB is the meaurement PRB for SS-RSRP #RB_J to RB_{J+19}
9.1.2.1 NR SA FR1 initiation/cease of S-SSB transmission for FR1 NR cell as synchronization reference source	Average Noc: ±1.5 dB Average $\hat{E}s_1$ / Noc: ±0.3 dB Meas PRB Noc: ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc: ±0.3 dB	Noc is the AWGN absolute power on Uu carrier. $\hat{E}s_1$ / Noc is the ratio of Cell 1 signal / AWGN Meas PRB is the meaurement PRB for SS-RSRP #RB_J to RB_{J+19}
9.1.2.2 NR SA FR1 initiation/cease of S-SSB transmission for SyncRef UE as synchronization reference source	Average Noc: ±1.5 dB Average $\hat{E}s_1$ / Noc: ±0.3 dB Meas PRB Noc: ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc: ±0.3 dB	Noc is the AWGN absolute power on PC5 carrier. $\hat{E}s_1$ / Noc is the ratio of SyncRef UE 1 signal / AWGN Meas PRB is the meaurement PRB for PSBCH-RSRP #RB_J to RB_{J+10}
9.1.3.1 NR SA FR1 synchronization reference selection/reselection for GNSS configured as the highest priority synchronization reference source	Average Noc: ±1.5 dB Average $\hat{E}s_i$ / Noc: ±0.3 dB, i=1,2,3 Meas PRB Noc: ±1.5 dB Meas PRB $\hat{E}s_i$ / Noc: ±0.3 dB, i=1,2,3	Noc is the AWGN absolute power on PC5 carrier. $\hat{E}s_i$ / Noc is the ratio of SyncRef UE i signal / AWGN, i = 1,2,3 Meas PRB is the meaurement PRB for PSBCH-RSRP #RB_J to RB_{J+10}
9.1.3.2 NR SA FR1 synchronization reference selection/reselection for FR1 NR Cell configured as the highest priority synchronization reference source	Average Noc: ±1.5 dB Average $\hat{E}s_i$ / Noc: ±0.3 dB, i=1,2 Meas PRB Noc: ±1.5 dB Meas PRB $\hat{E}s_i$ / Noc: ±0.3 dB, i=1,2	Noc is the AWGN absolute power on PC5 carrier. $\hat{E}s_i$ / Noc is the ratio of SyncRef UE i signal / AWGN, i = 1,2 Meas PRB is the meaurement PRB for PSBCH-RSRP #RB_J to RB_{J+10}
9.1.4.1 NR SA FR1 L1 SL-RSRP measurement for autonomous resource selection/reselection	Average Noc: ±1.5 dB Average $\hat{E}s_i$ / Noc: ±0.3 dB, i=0,1,...,49 Meas PRB Noc: ±1.5 dB Meas PRB $\hat{E}s_i$ / Noc: ±0.3 dB, i=0,1,...,49	Noc is the AWGN absolute power on PC5 carrier. $\hat{E}s_i$ / Noc is the ratio of active sidelink UE i signal / AWGN, i = 0,1,...,49 Meas PRB is the meaurement PRB for SL-RSRP #RB_J to RB_{J+599}

9.1.4.2 NR SA FR1 L1 SL-RSRP measurement for resource pre-emption	Average Noc: ±1.5 dB Average $\hat{E}s_1$ / Noc: ±0.3 dB, Meas PRB Noc: ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc: ±0.3 dB,	Noc is the AWGN absolute power on PC5 carrier. $\hat{E}s_1$ / Noc is the ratio of active sidelink UE 1 signal / AWGN, Meas PRB is the meaurement PRB for SL-RSRP #RB_J to RB_{J+119}
9.1.4.3 NR SA FR1 L1 SL-RSRP measurement for resource re-evaluation	Average Noc: ±1.5 dB Average $\hat{E}s_i$ / Noc: ±0.3 dB, i=0,1,...,129 Meas PRB Noc: ±1.5 dB Meas PRB $\hat{E}s_i$ / Noc: ±0.3 dB, i=0,1,...,129	Noc is the AWGN absolute power on PC5 carrier. $\hat{E}s_i$ / Noc is the ratio of active sidelink UE i signal / AWGN, i = 0,1,...,129 Meas PRB is the meaurement PRB for SL-RSRP #RB_J to RB_{J+119}
9.1.5.1 NR SA FR1 congestion control measurement for concurrent operation	Average Noc: ±1.5 dB Average $\hat{E}s_i$ / Noc: ±0.3 dB, i=0,1,2,3 Meas PRB Noc: ±1.5 dB Meas PRB $\hat{E}s_i$ / Noc: ±0.3 dB, i=0,1,2,3	Noc is the AWGN absolute power on PC5 carrier. $\hat{E}s_i$ / Noc is the ratio of active sidelink UE i signal / AWGN, i = 0,1,2,3 Meas PRB is the meaurement PRB for SL-RSSI #RB_J to RB_{J+119}
9.1.5.2 NR SA FR1 congestion control measurement for PC5-only operation	Same as 9.1.5.1	Same as 9.1.5.1
9.1.6.1 NR SA FR1 interruption to WAN due to NR sidelink communication	± 0.6dB (AWGN conditions)	Overall system uncertainty for AWGN condition comprises two quantities: 1. Signal-to-noise ratio uncertainty 2. Effect of AWGN flatness and signal flatness Items 1 and 2 are assumed to be uncorrelated so can be root sum squared: AWGN flatness and signal flatness has x 0.25 effect on the required SNR, so use sensitivity factor of x 0.25 for the uncertainty contribution. Test System uncertainty = SQRT (Signal-to-noise ratio uncertainty 2 + (0.25 x AWGN flatness and signal flatness) 2) Signal-to-noise ratio uncertainty ±0.3 dB AWGN flatness and signal flatness ±2.0 dB

Table F.1.1.2-9: Maximum test system uncertainty for RRM requirements for SA FR1 test cases for RedCap

Subclause	Maximum Test System Uncertainty[1]	Derivation of Test System Uncertainty
16.1.1.1 NR SA FR1 Cell reselection for 1 Rx UE	Same as 6.1.1.1	Same as 6.1.1.1
16.1.1.2 NR SA FR1 Cell reselection for 2 Rx UE	Same as 6.1.1.1	Same as 6.1.1.1
16.1.1.3 NR SA FR1-FR1 Cell reselection for 1 Rx UE	Same as 6.1.1.2	Same as 6.1.1.2
16.1.1.4 NR SA FR1-FR1 Cell reselection for 2 Rx UE	Same as 6.1.1.2	Same as 6.1.1.2
16.1.1.5 NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE	Same as 6.1.1.4	Same as 6.1.1.4
16.1.1.6 NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	Same as 6.1.1.4	Same as 6.1.1.4
16.1.1.7 NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE	Same as 6.1.1.5	Same as 6.1.1.5

16.1.1.8 NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	Same as 6.1.1.5	Same as 6.1.1.5
16.1.2.1 NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 1 RX UE	Same as 6.1.2.1	Same as 6.1.2.1
16.1.2.2 NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 2 RX UE	Same as 6.1.2.1	Same as 6.1.2.1
16.1.2.3 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 1 RX UE	Same as 6.1.2.2	Same as 6.1.2.2
16.1.2.4 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 2 RX UE	Same as 6.1.2.2	Same as 6.1.2.2
16.1.2.5 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE	Same as 6.1.2.2	Same as 6.1.2.2
16.1.2.6 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	Same as 6.1.2.2	Same as 6.1.2.2
16.2.1.1 NR SA FR1 CG-SDT for 1 Rx UE	Same as 6.2.1	Same as 6.2.1
16.2.1.2 NR SA FR1 CG-SDT for 2 Rx UE	Same as 6.2.1	Same as 6.2.1
16.3.1.1 NR SA FR1 handover with known target cell for 1 Rx UE	Same as 6.3.1.1	Same as 6.3.1.1
16.3.1.2 NR SA FR1 handover with known target cell for 2 Rx UE	Same as 6.3.1.1	Same as 6.3.1.1
16.3.1.3 NR SA FR1 handover with unknown target cell for 1 Rx UE	Same as 6.3.1.1	Same as 6.3.1.1
16.3.1.4 NR SA FR1 handover with unknown target cell for 2 Rx UE	Same as 6.3.1.1	Same as 6.3.1.1
16.3.1.5 NR SA FR1-FR1 handover with unknown target cell for 1 Rx UE	Same as 6.3.1.3	Same as 6.3.1.3
16.3.1.6 NR SA FR1-FR1 handover with unknown target cell for 2 Rx UE	Same as 6.3.1.3	Same as 6.3.1.3
16.3.1.7 NR SA FR1 - E-UTRA handover with known target cell for 1 Rx UE	Same as 6.1.2.1	Same as 6.1.2.1
16.3.1.8 NR SA FR1 - E-UTRA handover with known target cell for 2 Rx UE	Same as 6.1.2.1	Same as 6.1.2.1
16.3.1.9 NR SA FR1 - E-UTRA handover with unknown target cell for 1 Rx UE	Same as 6.1.2.1	Same as 6.1.2.1
16.3.1.10 NR SA FR1 - E-UTRA handover with unknown target cell for 2 Rx UE	Same as 6.1.2.1	Same as 6.1.2.1
16.3.2.1.1 NR SA FR1 RRC Re-establishment for 1 Rx UE	Same as 6.1.1.1	Same as 6.1.1.1
16.3.2.1.2 NR SA FR1 RRC Re-establishment for 2 Rx UE	Same as 6.1.1.1	Same as 6.1.1.1
16.3.2.1.3 NR SA FR1-FR1 RRC Re-establishment for 1 Rx UE	Same as 6.1.1.2	Same as 6.1.1.2
16.3.2.1.4 NR SA FR1-FR1 RRC Re-establishment for 2 Rx UE	Same as 6.1.1.2	Same as 6.1.1.2
16.3.2.1.5 NR SA FR1 RRC Re-establishment for 1 Rx UE without serving cell timing	Same as 6.3.2.1.3	Same as 6.3.2.1.3
16.3.2.1.6 NR SA FR1 RRC Re-establishment for 2 Rx UE without serving cell timing	Same as 6.3.2.1.3	Same as 6.3.2.1.3

16.3.2.2.1 NR SA FR1 4-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.2.2 NR SA FR1 4-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.2.3 NR SA FR1 4-step RA type non-contention based random access test in FR1 for NR standalone for 1 Rx UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.2.4 NR SA FR1 4-step RA type non-contention based random access test in FR1 for NR standalone for 2 Rx UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.2.5 NR SA FR1 2-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.2.6 NR SA FR1 2-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.2.7 NR SA FR1 2-step RA type non-contention based test in FR1 for NR standalone for 1 RX UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.2.8 NR SA FR1 2-step RA type non-contention based test in FR1 for NR standalone for 2 RX UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.3.1 NR SA FR1-FR1 RRC connection release with redirection for 1 Rx UE	Same as 6.1.1.1	Same as 6.1.1.1
16.3.2.3.2 NR SA FR1-FR1 RRC connection release with redirection for 2 Rx UE	Same as 6.1.1.1	Same as 6.1.1.1
16.3.2.3.3 NR SA FR1 - E-UTRA RRC connection release with redirection for 1 Rx UE	Same as 6.1.2.1	Same as 6.1.2.1
16.3.2.3.4 NR SA FR1 - E-UTRA RRC connection release with redirection for 2 Rx UE	Same as 6.1.2.1	Same as 6.1.2.1
16.4.1.1 NR SA FR1 NR UE Transmit Timing accuracy for 1 Rx UE	Same as 6.4.1.1	Same as 6.4.1.1
16.4.1.2 NR SA FR1 NR UE Transmit Timing accuracy for 2 Rx UE	Same as 6.4.1.1	Same as 6.4.1.1
16.4.3.1 NR SA FR1 timing advance adjustment accuracy for 1 Rx UE	Same as 6.4.3.1	Same as 6.4.3.1
16.4.3.2 NR SA FR1 timing advance adjustment accuracy for 2 Rx UE	Same as 6.4.3.1	Same as 6.4.3.1
16.5.1.1 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.2 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.3 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.4 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.5 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1

16.5.1.6 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.7 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.8 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.9 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.10 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.11 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.12 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.13 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.14 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.15 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.1.16 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE	Same as 6.5.1.1	Same as 6.5.1.1
16.5.2.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 1 Rx UE	Same as 6.5.5.1	Same as 6.5.5.1
16.5.2.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE	Same as 6.5.5.1	Same as 6.5.5.1
16.5.2.3 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 1 Rx UE	Same as 6.5.5.1	Same as 6.5.5.1
16.5.2.4 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE	Same as 6.5.5.1	Same as 6.5.5.1
16.5.2.5 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 1 Rx UE	Same as 6.5.5.3	Same as 6.5.5.3

16.5.2.6 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE	Same as 6.5.5.3	Same as 6.5.5.3
16.5.2.7 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 1 Rx UE	Same as 6.5.5.3	Same as 6.5.5.3
16.5.2.8 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE	Same as 6.5.5.3	Same as 6.5.5.3
16.5.3.1.1 NR SA FR1 DCI-based DL active BWP switch in non-DRX for 1 Rx UE	Same as 6.5.6.1.2	Same as 6.5.6.1.2
16.5.3.1.2 NR SA FR1 DCI-based DL active BWP switch in non-DRX for 2 Rx UE	Same as 6.5.6.1.2	Same as 6.5.6.1.2
16.5.3.2.1 NR SA FR1 RRC-based DL active BWP switch in non-DRX for 1 Rx UE	Same as 6.5.6.2.1	Same as 6.5.6.2.1
16.5.3.2.2 NR SA FR1 RRC-based DL active BWP switch in non-DRX for 2 Rx UE	Same as 6.5.6.2.1	Same as 6.5.6.2.1
16.5.4.1 NR SA FR1 UE specific CBW change on PCell in non-DRX for 1 Rx UE	Same as 6.5.8.1	Same as 6.5.8.1
16.5.4.2 NR SA FR1 UE specific CBW change on PCell in non-DRX for 2 Rx UE	Same as 6.5.8.1	Same as 6.5.8.1
16.6.1.1 NR SA FR1 Event triggered reporting tests without gap under non-DRX for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.2 NR SA FR1 Event triggered reporting tests without gap under non-DRX for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.3 NR SA FR1 Event triggered reporting tests without gap under DRX for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.4 NR SA FR1 Event triggered reporting tests without gap under DRX for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.5 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.6 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.7 NR SA FR1 Event triggered reporting tests with per-UE gaps under DRX for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.8 NR SA FR1 Event triggered reporting tests with per-UE gaps under DRX for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.9 NR SA FR1 Event triggered reporting tests without gap under non-DRX with SSB index reading for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.10 NR SA FR1 Event triggered reporting tests without gap under non-DRX with SSB index reading for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1

16.6.1.11 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.12 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.2.1 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.2 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.3 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.4 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.5 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 1 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.6 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.7 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 1 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.8 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.9 NR SA FR1-FR1 Event triggered reporting tests with additional mandatory gap pattern for 1 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.10 NR SA FR1-FR1 Event triggered reporting tests with additional mandatory gap pattern for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.11 NR SA FR1-FR1 Event triggered reporting tests for FR1 when DRX is used for 1 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.12 NR SA FR1-FR1 Event triggered reporting tests for FR1 when DRX is used for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1
16.6.3.1 NR - E-UTRA event-triggered reporting in non-DRX for 1 Rx UE	Same as 6.6.3.1	Same as 6.6.3.1
16.6.3.2 NR - E-UTRA event-triggered reporting in non-DRX for 2 Rx UE	Same as 6.6.3.2	Same as 6.6.3.2
16.6.3.3 NR - E-UTRA event-triggered reporting in DRX for 1 Rx UE	Same as 6.6.3.1	Same as 6.6.3.1
16.6.3.4 NR - E-UTRA event-triggered reporting in DRX for 2 Rx UE	Same as 6.6.3.2	Same as 6.6.3.2
16.6.4.1 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for 1 Rx UE	Same as 6.6.4.1	Same as 6.6.4.1
16.6.4.2 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for 2 Rx UE	Same as 6.6.4.1	Same as 6.6.4.1

16.6.4.3 NR SA FR1 SSB based L1-RSRP measurement when DRX is used for 1 Rx UE	Same as 6.6.4.1	Same as 6.6.4.1
16.6.4.4 NR SA FR1 SSB based L1-RSRP measurement when DRX is used for 2 Rx UE	Same as 6.6.4.1	Same as 6.6.4.1
16.6.4.5 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for 1 Rx UE	Same as 6.6.4.3	Same as 6.6.4.3
16.6.4.6 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for 2 Rx UE	Same as 6.6.4.3	Same as 6.6.4.3
16.6.4.7 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for 1 Rx UE	Same as 6.6.4.3	Same as 6.6.4.3
16.6.4.8 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for 2 Rx UE	Same as 6.6.4.3	Same as 6.6.4.3
16.6.5.1 NR SA FR1 CGI identification of NR neighbour cell for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.5.2 NR SA FR1 CGI identification of NR neighbour cell for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1
16.6.5.3 NR SA FR1 - E-UTRA CGI Identification of E-UTRA cell for 1 Rx UE	Noc1 ±1.5 dB Noc2 ±1.5 dB Ês1 / Noc1 ±0.3 dB Ês2 / Noc2 ±0.3 dB	Noc1 is the AWGN on Cell 1 frequency. Noc1 is the AWGN on Cell 2 frequency. Ês1 / Noc1 is the ratio of Cell 1 signal / AWGN. Ês2 / Noc2 is the ratio of Cell 2 signal / AWGN.
16.6.5.4 NR SA FR1 - E-UTRA CGI Identification of E-UTRA cell for 2 Rx UE	Same as 16.6.5.3	Same as 16.6.5.3
16.7.1.1.1 NR SA FR1 SS-RSRP absolute measurement accuracy for 1 Rx UE	Same as 6.7.1.1.1	Same as 6.7.1.1.1
16.7.1.1.2 NR SA FR1 SS-RSRP relative measurement accuracy for 1 Rx UE	Same as 6.7.1.1.2	Same as 6.7.1.1.2
16.7.1.2.1 NR SA FR1 SS-RSRP absolute measurement accuracy for 2 Rx UE	Same as 6.7.1.1.1	Same as 6.7.1.1.1
16.7.1.2.2 NR SA FR1 SS-RSRP relative measurement accuracy for 2 Rx UE	Same as 6.7.1.1.2	Same as 6.7.1.1.2
16.7.1.3.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for 1 Rx UE	Same as 6.7.1.2.1	Same as 6.7.1.2.1
16.7.1.3.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy for 1 Rx UE	Same as 6.7.1.2.2	Same as 6.7.1.2.2
16.7.1.4.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for 2 Rx UE	Same as 6.7.1.2.1	Same as 6.7.1.2.1
16.7.1.4.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy for 2 Rx UE	Same as 6.7.1.2.2	Same as 6.7.1.2.2
16.7.2.1 NR SA FR1 SS-RSRQ absolute measurement accuracy for 1 Rx UE	Same as 6.7.2.1	Same as 6.7.2.1
16.7.2.2 NR SA FR1 SS-RSRQ absolute measurement accuracy for 2 Rx UE	Same as 6.7.2.1	Same as 6.7.2.1
16.7.2.3.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for 1 Rx UE	Same as 6.7.1.2.1	Same as 6.7.1.2.1

16.7.2.3.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for 1 Rx UE	Same as 6.7.1.2.1	Same as 6.7.1.2.1
16.7.2.4.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for 2 Rx UE	Same as 6.7.1.2.1	Same as 6.7.1.2.1
16.7.2.4.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for 2 Rx UE	Same as 6.7.1.2.1	Same as 6.7.1.2.1
16.7.3.1 NR SA FR1 SS-SINR absolute measurement accuracy for 1 Rx UE	Same as 6.7.1.1.1	Same as 6.7.1.1.1
16.7.3.2 NR SA FR1 SS-SINR absolute measurement accuracy for 2 Rx UE	Same as 6.7.1.1.1	Same as 6.7.1.1.1
16.7.3.3.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy for 1 Rx UE	Same as 6.7.1.2.1	Same as 6.7.1.2.1
16.7.3.3.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy for 1 Rx UE	Same as 6.7.1.2.1	Same as 6.7.1.2.1
16.7.3.4.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy for 2 Rx UE	Same as 6.7.1.2.1	Same as 6.7.1.2.1
16.7.3.4.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy for 2 Rx UE	Same as 6.7.1.2.1	Same as 6.7.1.2.1
16.7.4.1.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for 1 Rx UE	Same as 6.7.4.1.1	Same as 6.7.4.1.1
16.7.4.1.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy for 1 Rx UE	Same as 6.7.4.1.1	Same as 6.7.4.1.1
16.7.4.2.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for 2 Rx UE	Same as 6.7.4.1.1	Same as 6.7.4.1.1
16.7.4.2.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy for 2 Rx UE	Same as 6.7.4.1.1	Same as 6.7.4.1.1
16.7.4.3.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for 1 Rx UE	Same as 6.7.4.1.1	Same as 6.7.4.1.1
16.7.4.3.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for 1 Rx UE	Same as 6.7.4.1.1	Same as 6.7.4.1.1
16.7.4.4.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for 2 Rx UE	Same as 6.7.4.1.1	Same as 6.7.4.1.1
16.7.4.4.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for 2 Rx UE	Same as 6.7.4.1.1	Same as 6.7.4.1.1
16.7.5.1 NR SA FR1 - E-UTRA RSRP absolute measurement accuracy for 1 Rx UE	Same as 6.7.5.1	Same as 6.7.5.1
16.7.5.2 NR SA FR1 - E-UTRA RSRP absolute measurement accuracy for 2 Rx UE	Same as 6.7.5.1	Same as 6.7.5.1
16.7.6.1 NR SA FR1 - E-UTRA RSRQ absolute measurement accuracy for 1 Rx UE	Same as 6.7.5.1	Same as 6.7.5.1
16.7.6.2 NR SA FR1 - E-UTRA RSRQ absolute measurement accuracy for 2 Rx UE	Same as 6.7.5.1	Same as 6.7.5.1

Table F.1.1.2-10: Maximum test system uncertainty for RRM requirements for SA FR2 test cases for RedCap

Subclause	Maximum Test System Uncertainty[1]	Derivation of Test System Uncertainty
17.1.1.1 NR SA FR2 Cell reselection for 2 Rx UE	Same as 7.1.1.1	Same as 7.1.1.1
17.1.1.2 NR SA FR2-FR2 Cell reselection for 2 Rx UE	Same as 7.1.1.1	Same as 7.1.1.1
17.1.1.3 NR SA FR2 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	Same as 7.1.1.1	Same as 7.1.1.1
17.1.1.4 NR SA FR2-FR2 Cell reselection for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE	Same as 7.1.1.1	Same as 7.1.1.1
17.3.1.1 NR SA FR2 handover with unknown target cell for 2 Rx	Same as 7.3.1.2	Same as 7.3.1.2
17.3.1.2 NR SA FR2-FR2 handover with unknown target cell for 2 Rx UE	Same as 7.3.1.3	Same as 7.3.1.3
17.3.2.1.1 NR SA FR2 Intra-frequency RRC Re-establishment in FR2	Same as 7.3.2.1.1	Same as 7.3.2.1.1
17.3.2.1.2 NR SA FR2-FR2 Inter-frequency RRC Re-establishment in FR2	Same as 7.3.2.1.2	Same as 7.3.2.1.2
17.3.2.1.3 NR SA FR2 RRC re-establishment without serving cell timing	Same as 7.3.2.1.3	Same as 7.3.2.1.3
17.3.2.3.1 NR SA FR2-FR2 RRC connection release with redirection for 2 Rx UE	Same as 7.3.2.3	Same as 7.3.2.3
17.4.1.1 NR SA FR2 NR UE Transmit Timing accuracy for 2 Rx UE	Same as 7.4.1.1	Same as 7.4.1.1
17.5.1.1 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE	Same as 5.5.1.1	Same as 5.5.1.1
17.5.1.2 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE	Same as 5.5.1.1	Same as 5.5.1.1
17.5.1.3 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	Same as 5.5.1.1	Same as 5.5.1.1
17.5.1.4 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	Same as 5.5.1.1	Same as 5.5.1.1
17.5.1.5 NR SA FR2 Radio Link Monitoring Out-of-sync Test for PCell configured with CSI-RS-based RLM RS in non-DRX mode for 2 Rx UE	Same as 5.5.1.1	Same as 5.5.1.1
17.5.1.6 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE	Same as 5.5.1.1	Same as 5.5.1.1
17.5.1.7 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE	Same as 5.5.1.1	Same as 5.5.1.1
17.5.1.8 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE	Same as 5.5.1.1	Same as 5.5.1.1
17.5.1.9 NR SA FR2 radio link monitoring UE scheduling restrictions on FR2 for 2 Rx UE	Same as 5.5.1.1	Same as 5.5.1.1

17.5.2.1 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE	Same as 7.5.5.1	Same as 7.5.5.1
17.5.2.2 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE	Same as 7.5.5.2	Same as 7.5.5.2
17.5.2.3 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE	Same as 7.5.5.3	Same as 7.5.5.3
17.5.2.4 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE	Same as 7.5.5.4	Same as 7.5.5.4
17.5.2.5 NR SA FR2 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE	Same as 7.5.5.5	Same as 7.5.5.5
17.5.3.1.1 NR SA FR2 DCI-based and Timer-based DL active BWP switch for 2 Rx UE	Noc ±5.65dB Ês / Noc ±0.3 dB AWGN and signal flatness: ±3.0 dB	Ês / Noc is the ratio of cell 1 signal / AWGN
17.5.3.2.1 NR SA FR2 RRC-based DL active BWP switch for 2 Rx UE	Same as 17.5.3.1.1	Same as 17.5.3.1.1
17.5.4.1.1 NR SA FR2 MAC-CE based active TCI state switch for a known TCI state for 2 Rx UE	Same as 7.5.8.1.1	Same as 7.5.8.1.1
17.5.4.2.1 NR SA FR2 RRC-CE based active TCI state switch for a known TCI state for 2 Rx UE	Same as 7.5.8.2.1	Same as 7.5.8.2.1
17.5.5.1.1 NR SA FR2 MAC-CE based spatial relation switch associated with known DL-RS for 2 Rx UE	Same as 7.5.9.1.1	Same as 7.5.9.1.1
17.5.5.2.1 NR SA FR2 RRC-based spatial relation switch associated with a known DL-RS for 2 Rx UE	Same as 7.5.9.2.1	Same as 7.5.9.2.1
17.6.1.1 NR SA FR2 event triggered reporting without gap in non-DRX for 2 Rx UE	Same as 7.6.1.1	Same as 7.6.1.1
17.6.1.2 NR SA FR2 event triggered reporting without gap in DRX for 2 Rx UE	Same as 7.6.1.2	Same as 7.6.1.2
17.6.1.3 NR SA FR2 event triggered reporting with gaps in non-DRX for 2 Rx UE	Same as 7.6.1.1	Same as 7.6.1.1
17.6.1.4 NR SA FR2 event triggered reporting with gaps in DRX for 2 Rx UE	Same as 7.6.1.2	Same as 7.6.1.2
17.6.2.1 NR SA FR2-FR2 event triggered reporting in non-DRX for 2 Rx UE	Same as 7.6.2.1	Same as 7.6.2.1
17.6.2.2 NR SA FR2-FR2 event triggered reporting in DRX for 2 Rx UE	Same as 7.6.2.2	Same as 7.6.2.2
17.6.2.3 NR SA FR2-FR2 event triggered reporting with SSB time index detection in non-DRX for 2 Rx UE	Same as 7.6.2.1	Same as 7.6.2.1
17.6.2.4 NR SA FR2-FR2 event triggered reporting with SSB time index detection in DRX for 2 Rx UE	Same as 7.6.2.2	Same as 7.6.2.2
17.6.3.1 NR SA FR2 SSB based L1-RSRP measurement in non-DRX for 2 Rx UE	Same as 7.6.3.1	Same as 7.6.3.1

17.6.3.2 NR SA FR2 SSB based L1-RSRP measurement in DRX for 2 Rx UE	Same as 7.6.3.1	Same as 7.6.3.1
17.6.3.3 NR SA FR2 CSI-RS based L1-RSRP measurement in non-DRX for 2 Rx UE	Same as 7.6.3.3	Same as 7.6.3.3
17.6.3.4 NR SA FR2 CSI-RS based L1-RSRP measurement in DRX for 2 Rx UE	Same as 7.6.3.3	Same as 7.6.3.3
17.7.1.1 NR SA FR2 SS-RSRP measurement accuracy for 2 Rx UE	Same as 7.7.1.1	Same as 7.7.1.1
17.7.1.2 NR SA FR2-FR2 SS-RSRP measurement accuracy for 2 Rx UE	Same as 7.7.1.2	Same as 7.7.1.2
17.7.2.1 NR SA FR2 SS-RSRQ measurement accuracy for 2 Rx UE	Same as 7.7.2.1	Same as 7.7.2.1
17.7.2.2 NR SA FR2-FR2 SS-RSRQ measurement accuracy for 2 Rx UE	Same as 7.7.2.2	Same as 7.7.2.2
17.7.3.1 NR SA FR2 SSB based L1-RSRP measurement accuracy for 2 Rx UE	Same as 7.7.4.1	Same as 7.7.4.1
17.7.3.2 NR SA FR2 CSI-RS based L1-RSRP measurement accuracy for 2 Rx UE	Same as 7.7.4.2	Same as 7.7.4.2
17.7.4.1 NR SA FR2 SS-SINR measurement accuracy for 2 Rx UE	Same as 7.7.3.1	Same as 7.7.3.1
17.7.4.2 NR SA FR2-FR2 SS-SINR measurement accuracy for 2 Rx UE	Same as 7.7.3.2	Same as 7.7.3.2

Table F.1.1.2-11: Maximum test system uncertainty for RRM requirements for E-UTRA – NR inter-RAT test cases with E-UTRA serving cell for RedCap

Subclause	Maximum Test System Uncertainty[1]	Derivation of Test System Uncertainty
18.1.1.1 E-UTRA - NR SA FR1 E-UTRA cell re-selection to higher priority NR target Cell for 2 Rx UE	Same as 8.2.1.1	Same as 8.2.1.1
18.2.1.1 E-UTRA - NR SA FR1 handover for 2 Rx UE	Same as 8.3.1.1	Same as 8.3.1.1
18.2.2.1 E-UTRA - NR SA FR1 RRC connection release with redirection for 2 Rx UE	Same as 6.1.1.1	Same as 6.1.1.1
18.3.1.1 E-UTRA - NR SA FR1 event triggered reporting without SSB time index detection in non-DRX	Same as 8.4.2.1	Same as 8.4.2.1
18.3.1.2 E-UTRA - NR SA FR1 event triggered reporting without SSB time index detection in DRX	Same as 8.4.2.1	Same as 8.4.2.1
18.3.1.3 E-UTRA - NR SA FR1 event triggered reporting with SSB time index detection in non-DRX	Same as 8.4.2.1	Same as 8.4.2.1
18.3.1.4 E-UTRA - NR SA FR1 event triggered reporting with SSB time index detection in DRX	Same as 8.4.2.1	Same as 8.4.2.1

Table F.1.1.2-12: Maximum test system uncertainty for RRM requirements for EN-DC FR1 test cases for shared spectrum

Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty

10.1.1.1.1 EN-DC FR1 4-step RA type contention-based random access for NR PSCell with CCA	Noc ±1.5 dB $\hat{E}s_2$ / Noc ±0.3 dB Uplink absolute power measurement ±1.5 dB Uplink relative power measurement ±0.7 dB ±112T_c Uplink signal transmit timing relative to downlink	$\hat{E}s_2$ / N_{oc} is the ratio of cell 2 signal / AWGN T_c = 1/(480000 x 4096) seconds, the basic timing unit defined in TS 38.211 [7]
10.1.1.1.2 EN-DC FR1 4-step RA type non-contention based random access for NR PSCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1
10.1.1.1.3 EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1
10.1.1.1.4 EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1
10.1.2 EN-DC FR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA	Average Noc1 ±1.5 dB Average Noc2 ±1.5 dB Average $\hat{E}s1$ / Noc ±0.3 dB Average $\hat{E}s2$ / Noc ±0.3 dB Average $\hat{E}s3$ / Noc ±0.3 dB Average $\hat{E}s4$ / Noc ±0.3 dB	Noc1 is the AWGN on E-UTRAN freq1 Noc2 is the AWGN on NR freq2 $\hat{E}s1$ / Noc is the cell 1 SNR $\hat{E}s2$ / Noc is the cell 2 SNR $\hat{E}s3$ / Noc is the cell 3 SNR $\hat{E}s4$ / Noc is the cell 4 SNR
10.2.1.1 EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA	Same as 4.4.1.1	Same as 4.4.1.1
10.2.2.1 EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA	Same as 4.4.3.1	Same as 4.4.3.1
10.3.1.2 EN-DC FR1 Radio link monitoring out-of-sync test for PSCell under CCA configured with SSB-based RLM RS in non-DRX mode	Same as 4.5.1.1	Same as 4.5.1.1
10.3.1.3 EN-DC FR1 Radio link monitoring in-sync test for PSCell under CCAconfigured with SSB-based RLM RS in non-DRX mode	Same as 4.5.1.2	Same as 4.5.1.2
10.3.3.1 EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle	Same as 4.5.3.1	Same as 4.5.3.1
10.3.3.2 EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle	Same as 4.5.3.1	Same as 4.5.3.1
10.3.3.3 EN-DC FR1 SCell Activation and Deactivation of unknown NR SCell with NR PSCell and NR SCell under CCA	Same as 4.5.3.1	Same as 4.5.3.1
10.3.4.1 EN-DC FR1 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell under CCA configured with SSB-based BFD and LR in non-DRX mode	Same as 4.5.5.1	Same as 4.5.5.1
10.3.4.2 EN-DC FR1 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell under CCA configured with SSB-based BFD and LR in DRX mode	Same as 4.5.5.1	Same as 4.5.5.1
10.3.5.1 EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA	1.5dB	Measurement uncertainty for OCNG noise as defined in Table F.1.1.2-1
10.3.5.2.1 EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch in non-DRX in synchronous EN-DC	Same as 4.5.6.1.1	Same as 4.5.6.1.1

10.3.5.2.2 EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC	Same as 4.5.6.1.1	Same as 4.5.6.1.1
10.3.5.3.1 EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch in non-DRX in synchronous EN-DC	Same as 4.5.6.1.1	Same as 4.5.6.1.1
10.3.6.1 EN-DC FR1 Addition and Release Delay of known NR PSCell on the carrier under CCA	Same as 4.5.7.1	Same as 4.5.7.1
10.4.1.1 EN-DC FR1 Event-triggered reporting tests on PSCC under CCA without gaps under non-DRX	Same as 4.6.1.1	Same as 4.6.1.1
10.4.1.4 EN-DC FR1 Event-triggered reporting tests on PSCC under CCA with per-UE gaps under DRX	Same as 4.6.1.1	Same as 4.6.1.1
10.4.2.3 EN-DC FR1 event triggered reporting tests for FR1 with CCA cell without SSB time index detection when DRX is not used	Same as 4.6.2.1	Same as 4.6.2.1
10.4.2.4 EN-DC FR1 event triggered reporting tests for FR1 cell with CCA without SSB time index detection when DRX is used	Same as 4.6.2.1	Same as 4.6.2.1
10.4.2.5 EN-DC FR1 event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is not used	Same as 4.6.2.1	Same as 4.6.2.1
10.4.2.6 EN-DC FR1 event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is used	Same as 4.6.2.1	Same as 4.6.2.1
10.4.2.7 EN-DC FR1 event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used	Same as 4.6.2.1	Same as 4.6.2.1
10.4.2.8 EN-DC FR1 event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used	Same as 4.6.2.1	Same as 4.6.2.1
10.4.2.9 EN-DC FR1 event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used	Same as 4.6.2.1	Same as 4.6.2.1
10.4.2.10 EN-DC FR1 event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used	Same as 4.6.2.1	Same as 4.6.2.1
10.4.3.1 EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is not used	Same as 4.6.4.1	Same as 4.6.4.1
10.4.3.2 EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is used	Same as 4.6.4.1	Same as 4.6.4.1
10.4.3.3 EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used	Same as 4.6.4.1	Same as 4.6.4.1
10.4.3.4 EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used	Same as 4.6.4.1	Same as 4.6.4.1
10.4.4.1 EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	Same as 12.4.2.1	Same as 12.4.2.1
10.4.4.2 EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used	Same as 12.4.2.1	Same as 12.4.2.1

10.4.4.3 EN-DC FR1 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used	Same as 12.4.2.1	Same as 12.4.2.1
10.4.4.4 EN-DC FR1 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used	Same as 12.4.2.1	Same as 12.4.2.1
10.5.1.1 EN-DC FR1 Intra-frequency measurement accuracy on a CCA serving cell	Same as 4.7.1.1.1	Same as 4.7.1.1.1
10.5.1.2 EN-DC FR1 Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell	Same as 4.7.1.2.1	Same as 4.7.1.2.1
10.5.2.1 EN-DC FR1 Intra-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell	Same as 4.7.2.1	Same as 4.7.2.1
10.5.2.2 EN-DC FR1 Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell	Same as 4.7.2.2.1	Same as 4.7.2.2.1
10.5.3.1 EN-DC FR1 Intra-frequency measurement accuracy on PSCC under CCA	Average Noc ±1.5 dB Average Ês2 / Noc ±0.3 dB Average Ês3 / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB Ês2 / Noc ±0.8 dB Meas PRB Ês3 / Noc ±0.8 dB	Noc is the AWGN on NR freq1 Ês2 / Noc is the cell 2 SNR Ês3 / Noc is the cell 3 SNR Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
10.5.3.2 EN-DC FR1 Inter-frequency measurement accuracy on PSCC under CCA	Average Noc1 ±1.5 dB Average Noc2 ±1.5 dB Average Ês2 / Noc1 ±0.3 dB Average Ês3 / Noc2 ±0.3 dB Meas PRB Noc1 ±1.5 dB Meas PRB Noc2 ±1.5 dB Meas PRB Ês2 / Noc1 ±0.8 dB Meas PRB Ês3 / Noc2 ±0.8 dB	Noc1 is the AWGN on NR freq1 Noc2 is the AWGN on NR freq2 Ês2 / Noc1 is the cell 2 SNR Ês3 / Noc2 is the cell 3 SNR Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
10.5.3.3 EN-DC FR1 Intra-frequency measurement accuracy on SCC under CCA	Same as 10.5.3.1	Same as 10.5.3.1
10.5.4.1 EN-DC FR1 SSB based L1-RSRP measurement accuracy with CCA	Same as 4.7.4.1.1	Same as 4.7.4.1.1
10.5.5.1 EN-DC FR1 RSSI measurement accuracy on PSCC with CCA	Average Noc ±1.5 dB	Noc is the AWGN on NR freq1
10.5.5.2 EN-DC FR1 RSSI measurement accuracy on SCC with CCA	Same as 10.5.5.1	Same as 10.5.5.1
10.5.5.3 EN-DC FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA	Average Noc1 ±1.5 dB Average Noc2 ±1.5 dB	Noc1 is the AWGN on NR freq1 Noc2 is the AWGN on NR freq2
10.5.6.1 EN-DC FR1 Channel occupancy measurement accuracy on PSCC with CCA	Average Noc ±1.5 dB	Noc is the AWGN on NR freq1
10.5.6.2 EN-DC FR1 Channel occupancy measurement accuracy on SCC with CCA	Same as 10.5.6.1	Same as 10.5.6.1
10.5.6.3 EN-DC FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA	Average Noc1 ±1.5 dB Average Noc2 ±1.5 dB	Noc1 is the AWGN on NR freq1 Noc2 is the AWGN on NR freq2

Table F.1.1.2-13: Maximum test system uncertainty for RRM requirements for SA FR1 test cases for shared spectrum

Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty
11.1.1.1 NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when	Noc ±1.5 dB Ês1 / Noc ±0.3 dB Ês2 / Noc ±0.3 dB	Note: Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 2 signal / AWGN

subject to CCA on the serving and target cell		
11.1.1.2 NR SA FR1 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell	Noc1 ±1.5 dB Ês1 / Noc1 ±0.3 dB Noc2 ±1.5 dB Ês2 / Noc2 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Noc2 is the AWGN on cell 2 frequency Ês2 / Noc2 is the ratio of cell 2 signal / AWGN
11.1.2.1 Cell re-selection to NR with source NR carrier frequency under CCA	Same as 11.1.1.2	Same as 11.1.1.2
11.1.3.1 NR SA FR1 Cell re-selection to NR with source NR carrier frequency under CCA	Same as 11.1.1.2	Same as 11.1.1.2
11.1.4.1 NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA	Noc1 ±1.5 dB Ês1 / Noc1 ±0.3 dB Noc2 ±1.5 dB Ês2 / Noc2 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 (NR) frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Noc2 is the AWGN on cell 2 (E-UTRAN) frequency Ês2 / Noc2 is the ratio of cell 2 signal / AWGN
11.1.4.2 NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA	Same as 11.1.4.1	Same as 11.1.4.1
11.2.1.1 NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell	Average Noc ±1.5 dB Average Ês1 / Noc ±0.3 dB Average Ês2 / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB $Ês_1$ / Noc ±0.3 dB Meas PRB $Ês_2$ / Noc ±0.3 dB	Note: Ês1 / Noc is the ratio of cell 1 signal / AWGN Ês2 / Noc is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
11.2.1.2 NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell	Same as 11.2.1.1	Same as 11.2.1.1
11.2.1.3 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell	Noc1 ±1.5 dB Ês1 / Noc1 ±0.3 dB Noc2 ±1.5 dB Ês2 / Noc2 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Noc2 is the AWGN on cell 2 frequency Ês2 / Noc2 is the ratio of cell 2 signal / AWGN
11.2.1.4 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell	Same as 11.2.1.3	Same as 11.2.1.3
11.2.1.5 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell	Same as 11.2.1.3	Same as 11.2.1.3
11.2.1.6 NR SA FR1 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell	Same as 11.2.1.3	Same as 11.2.1.3
11.2.1.7 NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell	Same as 11.1.4.1	Same as 11.1.4.1
11.2.1.8 NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell	Same as 11.1.4.1	Same as 11.1.4.1
11.2.2.1.1 NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1	Same as 11.1.1.1	Same as 11.1.1.1
11.2.2.1.2 NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1	Same as 11.1.1.2	Same as 11.1.1.2
11.2.2.1.3 NR SA FR1 Intra-frequency RRC Re-establishment with CCA without serving cell timing	Same as 11.1.1.1	Same as 11.1.1.1

11.2.2.1.4 NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA	Same as 11.1.1.2	Same as 11.1.1.2
11.2.2.2.1 NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1
11.2.2.2.2 NR SA FR1 4-step RA type non-contention based random access for NR PSCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1
11.2.2.2.3 NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1
11.2.2.2.4 NR SA FR1 2-step RA type non-contention-based random access for NR PCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1
11.2.2.3.1 NR SA FR1 Redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA	Same as 11.2.2.3.2	Same as 11.2.2.3.2
11.2.2.3.2 NR SA FR1 Redirection from NR FR1 carrier without CCA to NR FR1 carrier under CCA	Noc1 ±1.5 dB Ês1 / Noc1 ±0.3 dB Noc2 ±1.5 dB Ês2 / Noc2 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 frequency Ês1 / Noc1 is the ratio of cell 1 signal / AWGN Noc2 is the AWGN on cell 2 frequency Ês2 / Noc2 is the ratio of cell 2 signal / AWGN
11.3.1.1 NR SA FR1 UE Transmit Timing Test with PCell under DL CCA	Same as 6.4.1.1	Same as 6.4.1.1
11.3.2.1 NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA	Same as 6.4.3.1	Same as 6.4.3.1
11.4.1.2 NR SA FR1 Radio link monitoring out-of-sync test for PCell under CCA configured with SSB-based RLM RS in non-DRX mode	Same as 6.5.1.1	Same as 6.5.1.1
11.4.1.3 NR SA FR1 Radio link monitoring in-sync test for PCell under CCA configured with SSB-based RLM RS in non-DRX mode	Same as 6.5.1.2	Same as 6.5.1.2
11.4.3.1 NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle	Same as 6.5.3.1	Same as 6.5.3.1
11.4.3.2 NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 640 ms SCell measurement cycle	Same as 6.5.3.1	Same as 6.5.3.1
11.4.3.3 NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA	Same as 6.5.3.1	Same as 6.5.3.1
11.4.4.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell under CCA configured with SSB-based BFD and LR in non-DRX mode	Same as 6.5.5.1	Same as 6.5.5.1
11.4.4.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell under CCA configured with SSB-based BFD and LR in DRX mode	Same as 6.5.5.1	Same as 6.5.5.1
11.4.5.1 NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA	1.5dB	Measurement uncertainty for OCNG noise as defined in Table F.1.1.2-1
11.4.5.2.1 NR SA FR1 - NR FR1 DL active BWP switch of PCell under CCA with non-DRX	Same as 6.5.6.1.1	Same as 6.5.6.1.1
11.4.5.2.2 NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA	Same as 6.5.6.1.1	Same as 6.5.6.1.1

11.4.5.3.1 NR SA FR1 DL active BWP switch with non-DRX	Same as 6.5.6.1.1	Same as 6.5.6.1.1
11.5.1.1 SA FR1 Event-triggered reporting tests on PCC without gaps under non-DRX	Same as 6.6.1.1	Same as 6.6.1.1
11.5.1.2 SA FR1 Event-triggered reporting tests on PCC without gaps under DRX	Same as 6.6.1.1	Same as 6.6.1.1
11.5.2.3 NR SA FR1-FR1 Event triggered reporting tests with CCA without SSB time index detection when DRX is not used	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.4 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.5 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.6 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.7 NR SA FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.8 NR SA FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.9 NR SA FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.10 NR SA FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used	Same as 10.4.2.3	Same as 10.4.2.3
11.5.3.1 NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX	Same as 6.6.3.1	Same as 6.6.3.1
11.5.3.2 NR SA FR1 - E-UTRAN event-triggered reporting in DRX	Same as 6.6.3.1	Same as 6.6.3.1
11.5.4.1 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used	Same as 6.6.4.1	Same as 6.6.4.1
11.5.4.2 NR SA FR1 SSB based L1-RSRP measurement when DRX is used	Same as 6.6.4.1	Same as 6.6.4.1
11.5.4.3 NR SA FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used	Same as 6.6.4.1	Same as 6.6.4.1
11.5.4.4 NR SA FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used	Same as 6.6.4.1	Same as 6.6.4.1
11.6.1.1 NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA	Same as 6.7.1.1.1	Same as 6.7.1.1.1
11.6.1.2 NR SA FR1 Intra-frequency measurement accuracy on SCC on a carrier frequency with CCA	Same as 6.7.1.1.1	Same as 6.7.1.1.1
11.6.2.1 NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA	Same as 6.7.2.1	Same as 6.7.2.1

11.6.2.2 NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA	Same as 6.7.2.2.1	Same as 6.7.2.2.1
11.6.2.3 NR SA FR1 Intra-frequency measurement accuracy on SCC	Same as 10.5.2.1	Same as 10.5.2.1
11.6.2.4 NR SA FR1 Inter-frequency measurement accuracy	FFS	FFS
11.6.3.1 NR SA FR1 Intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA	Same as 10.5.3.1	Same as 10.5.3.1
11.6.3.2 NR SA FR1 Inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA	Average Noc1 ±1.5 dB Average Noc2 ±1.5 dB Average Ês1 / Noc1 ±0.3 dB Average Ês2 / Noc2 ±0.3 dB Meas PRB Noc1 ±1.5 dB Meas PRB Noc2 ±1.5 dB meas PRB Ês1 / Noc1 ±0.8 dB meas PRB Ês2 / Noc2 ±0.8 dB	Noc1 is the AWGN on NR freq1 Noc2 is the AWGN on NR freq2 Ês1 / Noc1 is the cell 2 SNR Ês2 / Noc2 is the cell 3 SNR meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
11.6.3.3 NR SA FR1 Intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA	Same as 10.5.3.1	Same as 10.5.3.1
11.6.3.4 NR SA FR1 Intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA	FFS	FFS
11.6.4.1 NR SA FR1 SSB based L1-RSRP measurement accuracy with CCA	Same as 10.5.4.1	Same as 10.5.4.1
11.6.5.1 NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA	Average Noc ±1.5 dB	Noc is the AWGN on NR freq1
11.6.5.2 NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA	Same as 11.6.5.1	Same as 11.6.5.1
11.6.5.3 NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA	Average Noc1 ±1.5 dB Average Noc2 ±1.5 dB	Noc1 is the AWGN on NR freq1 Noc2 is the AWGN on NR freq2
11.6.6.1 NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA	Average Noc ±1.5 dB	Noc is the AWGN on NR freq1
11.6.6.2 NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA	Same as 11.6.6.1	Same as 11.6.6.1
11.6.6.3 NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA	Average Noc1 ±1.5 dB Average Noc2 ±1.5 dB	Noc1 is the AWGN on NR freq1 Noc2 is the AWGN on NR freq2

Table F.1.1.2-14: Maximum test system uncertainty for RRM requirements for E-UTRAN – SA FR1 Shared Spectrum test cases

Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty
12.1.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA	Same as 12.4.2.1	Same as 12.4.2.1
12.2.1.1 E-UTRAN - NR with CCA handover with known target cell	Same as 12.4.2.1	Same as 12.4.2.1
12.4.2.1 E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on cell 1 frequency Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB on cell 2 are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}

12.4.2.2 E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA	Same as 12.4.2.1	Same as 12.4.2.1
12.4.2.3 E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA	Same as 12.4.2.1	Same as 12.4.2.1
12.4.2.4 E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA	Same as 12.4.2.1	Same as 12.4.2.1

Table F.1.1.2-15: Maximum test system uncertainty for RRM requirements for SA FR1 with SCell in Shared Spectrum test cases

Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty
13.2.2.1 NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle	Same as 6.5.3.1	Same as 6.5.3.1
13.2.2.2 NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle	Same as 6.5.3.1	Same as 6.5.3.1
13.2.2.3 NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA	Same as 6.5.3.1	Same as 6.5.3.1
13.3.1.1 NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under non-DRX	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc ±0.3 dB Average $\hat{E}s_2$ / Noc ±0.3 dB Average $\hat{E}s_3$ / Noc ±0.3 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_3$ / Noc ±0.3 dB	Noc_1 is the AWGN on frequency 1 Noc_2 is the AWGN on frequency 2 $\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN $\hat{E}s_3$ / Noc is the ratio of cell 3 signal / AWGN Meas PRB on cell 3 (in frequency 2) are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
13.3.1.2 NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under DRX	Same as 13.3.1.1	Same as 13.3.1.1
13.3.1.3 NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX	Same as 13.3.1.1	Same as 13.3.1.1
13.3.1.4 NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX	Same as 13.3.1.1	Same as 13.3.1.1
13.3.2.3 NR SA FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is not used	Average Noc_1 ±1.5 dB Average Noc_3 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_3$ / Noc_3 ±0.3 dB Meas PRB Noc_3 ±1.5 dB Meas PRB $\hat{E}s_3$ / Noc_3 ±0.3 dB	Noc_1 is the AWGN on frequency 1 Noc_3 is the AWGN on frequency 3 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_3$ / Noc_3 is the ratio of cell 3 signal / AWGN Meas PRB on cell 3 are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
13.3.2.4 NR SA FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used	Same as 13.3.2.3	Same as 13.3.2.3
13.3.2.5 NR SA FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is not used	Same as 13.3.2.3	Same as 13.3.2.3
13.3.2.6 NR SA FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used	Same as 13.3.2.3	Same as 13.3.2.3
13.3.3.1 NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used	Same as 10.4.3.1	Same as 10.4.3.1

13.3.3.2 NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used	Same as 10.4.3.1	Same as 10.4.3.1
13.4.1.1 NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA	Same as 10.5.1.1	Same as 10.5.1.1
13.4.2.1 NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA	Same as 10.5.2.1	Same as 10.5.2.1
13.4.3.1 NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA	Same as 10.5.3.1	Same as 10.5.3.1
13.4.4.1 NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA	Same as 10.5.4.1	Same as 10.5.4.1
13.4.5.1 NR SA FR1 RSSI measurement accuracy on a carrier with CCA	Same as 10.5.5.1	Same as 10.5.5.1
13.4.5.2 NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA	Same as 10.5.5.3	Same as 10.5.5.3
13.4.6.1 NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA	Same as 10.5.6.1	Same as 10.5.6.1
13.4.6.2 NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA	Same as 10.5.6.3	Same as 10.5.6.3

Table F.1.1.2-16: Maximum test system uncertainty for RRM requirements for SA FR1 Satellite Access test cases

Subclause	Maximum Test System Uncertainty	Derivation of Test System Uncertainty
14.1.9 NR SA FR1-FR1 Cell reselection for UE fulfilling low mobility relaxed measurement criterion for Satellite Access	Noc_1 ±1.5 dB $\hat{E}s_1$ / Noc_1 ±0.3 dB Noc_2 ±1.5 dB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Note: Noc_1 is the AWGN on cell 1 frequency $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN Noc_2 is the AWGN on cell 2 frequency $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN
14.1.10 NR SA FR1-FR1 Cell reselection for UE fulfilling not-at-cell edge relaxed measurement criterion for Satellite Access	Same as 14.1.9	Same as 14.1.9
14.2.1.1 NR SA FR1 Handover for Satellite Access	Noc ±1.5 dB $\hat{E}s_1$ / Noc ±0.3 dB $\hat{E}s_2$ / Noc ±0.3 dB	Note: $\hat{E}s_1$ / Noc is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc is the ratio of cell 2 signal / AWGN
14.2.1.2 NR SA FR1-FR1 Handover for Satellite Access	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1$ / Noc_1 ±0.3 dB Average $\hat{E}s_2$ / Noc_2 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1$ / Noc_1 ±0.3 dB Meas PRB $\hat{E}s_2$ / Noc_2 ±0.3 dB	Noc_1 is the AWGN on NR freq1 Noc_2 is the AWGN on NR freq2 $\hat{E}s_1$ / Noc_1 is the ratio of cell 1 signal / AWGN $\hat{E}s_2$ / Noc_2 is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
14.2.1.3 NR SA FR1 Time-based Conditional Handover for NR Satellite Access	Same as 14.2.1.1	Same as 14.2.1.1
14.2.1.4 NR SA FR1-FR1 Time-based Conditional Handover for NR Satellite Access	Same as 14.2.1.2	Same as 14.2.1.2
14.2.1.5 NR SA FR1 Distance-based Conditional Handover for Satellite Access	Same as 14.2.1.1	Same as 14.2.1.1
14.2.1.6 NR SA FR1-FR1 Distance-based Conditional Handover for Satellite Access	Same as 14.2.1.2	Same as 14.2.1.2

14.4.1.1 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access	Average Noc ±1.5 dB Average Ês / Noc ±0.3 dB Meas PRB Noc ±1.5 dB Meas PRB Ês / Noc ±0.3 dB Fading profile ±0.7 dB	Noc is the AWGN on cell 1 frequency Ês / Noc is the SNR Meas PRB are the measurement PRB for SSB-based RLM #RB_J to RB_{J+19}
14.4.1.2 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access	Same as 14.4.1.1	Same as 14.4.1.1
14.4.1.3 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access	Same as 14.4.1.1	Same as 14.4.1.1
14.4.1.4 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access	Same as 14.4.1.1	Same as 14.4.1.1
14.4.1.5 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access	Same as 14.4.1.1	Same as 14.4.1.1
14.4.1.6 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access	Same as 14.4.1.1	Same as 14.4.1.1
14.4.1.7 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access	Same as 14.4.1.1	Same as 14.4.1.1
14.4.1.8 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access	Same as 14.4.1.1	Same as 14.4.1.1
14.4.2.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in non-DRX mode for Satellite Access	Average Noc_1 ±1.5 dB Average $Ês_1$ / Noc_1 ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB $Ês_1$ / Noc_1 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 frequency Ês1 / Noc1 is the SNR for the SSB Meas PRB is the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
14.4.2.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in DRX mode for Satellite Access	Same as 14.4.2.1	Same as 14.4.2.1
14.4.2.3 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with CSI-RS-based BFD and LR in non-DRX mode for Satellite Access	Average Noc1 ±1.5 dB Average Ês1 / Noc1 ±0.3 dB Meas PRB Noc1 ±1.5 dB Meas PRB Ês1 / Noc1 ±0.3 dB	Note: Noc1 is the AWGN on cell 1 frequency Ês1 / Noc1 is the SNR for the CSI-RS Meas PRB is the measurement PRB for CSI-RSRP #RB_0 to RB_{274}
14.4.2.4 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with CSI-RS-based BFD and LR in DRX mode for Satellite Access	Same as 14.4.2.3	Same as 14.4.2.3
14.5.1.1 SA FR1 event triggered reporting tests without gap under non-DRX for NR satellite access	Noc ±1.5 dB $Ês_1$ / Noc ±0.3 dB $Ês_2$ / Noc ±0.3 dB	Note: $Ês_1$ / Noc is the ratio of cell 1 signal / AWGN $Ês_2$ / Noc is the ratio of cell 2 signal / AWGN
14.5.1.2 SA FR1 Event triggered reporting tests without gap under DRX for NR satellite access	Same as 14.5.1.1	Same as 14.5.1.1
14.5.1.3 SA FR1 event triggered reporting tests without gap under non-DRX with FDD PCell with SSB index reading for NR satellite access	Same as 14.5.1.1	Same as 14.5.1.1

14.5.1.4 SA FR1 event triggered reporting tests with single measurement gap under non-DRX for satellite access for NR satellite access	Same as 14.5.1.1	Same as 14.5.1.1
14.5.1.5 SA FR1 event triggered reporting tests with FNO concurrent gaps under DRX for satellite access for NR satellite access	Same as 14.5.1.1	Same as 14.5.1.1
14.5.1.6 SA FR1 event triggered reporting tests with PPO concurrent gaps under non-DRX with SSB index reading for satellite access for NR satellite access	Same as 14.5.1.1	Same as 14.5.1.1
14.5.2.1 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1 / Noc_1$ ±0.3 dB Average $\hat{E}s_2 / Noc_2$ ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1 / Noc_1$ ±0.3 dB Meas PRB $\hat{E}s_2 / Noc_2$ ±0.3 dB	Noc_1 is the AWGN on NR freq1 Noc_2 is the AWGN on NR freq2 $\hat{E}s_1 / Noc_1$ is the ratio of cell 1 signal / AWGN $\hat{E}s_2 / Noc_2$ is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
14.5.2.2 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access	Same as 14.5.2.1	Same as 14.5.2.1
14.5.2.3 NR SA FR1-FR1 Event-triggered reporting with SSB time index detection when DRX is not used with single gap for satellite access	Same as 14.5.2.1	Same as 14.5.2.1
14.5.2.4 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access	Average Noc_1 ±1.5 dB Average Noc_2 ±1.5 dB Average $\hat{E}s_1 / Noc_1$ ±0.3 dB Average $\hat{E}s_2 / Noc_2$ ±0.3 dB Average $\hat{E}s_3 / Noc_2$ ±0.3 dB Meas PRB Noc_1 ±1.5 dB Meas PRB Noc_2 ±1.5 dB Meas PRB $\hat{E}s_1 / Noc_1$ ±0.3 dB Meas PRB $\hat{E}s_2 / Noc_2$ ±0.3 dB Meas PRB $\hat{E}s_3 / Noc_2$ ±0.3 dB	Noc_1 is the AWGN on NR freq1 Noc_2 is the AWGN on NR freq2 $\hat{E}s_1 / Noc_1$ is the ratio of cell 1 signal / AWGN $\hat{E}s_2 / Noc_2$ is the ratio of cell 2 signal / AWGN $\hat{E}s_3 / Noc_2$ is the ratio of cell 2 signal / AWGN Meas PRB are the measurement PRB for SS-RSRP #RB_J to RB_{J+19}
14.5.2.6 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access	Same as 14.5.2.4	Same as 14.5.2.4
14.6.3.1 NR SA FR1 SS-SINR Measurement Accuracy for Satellite Access	Average Noc ±1.5 dB Average $\hat{E}s_1 / Noc$ ±0.3 dB Average $\hat{E}s_2 / Noc$ ±0.3 dB meas PRB $\hat{E}s_1 / Noc$ ±0.8 dB meas PRB $\hat{E}s_2 / Noc$ ±0.8 dB	Noc is the AWGN on NR freq1 $\hat{E}s_1 / Noc$ is the cell 1 SNR $\hat{E}s_2 / Noc$ is the cell 2 SNR meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
14.6.3.2 NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access	Same as 14.6.3.1	Same as 14.6.3.1
14.6.4.1 NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access	Average Noc ±1.5 dB Average $\hat{E}s_1 / Noc$ ±0.3 dB Meas PRB $\hat{E}s_1 / Noc$ ±0.8 dB	Noc is the AWGN on NR freq1 $\hat{E}s_1 / Noc$ is the cell 1 SNR Meas PRB is the measurement PRB for SS-RSRP #RBJ to RBJ+19
14.6.4.2 NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access	Same as 14.6.4.1	Same as 14.6.4.1

F.1.2 Interpretation of measurement results (normative)

See TS 38.521-1 [17] Annex F.2.

F.1.3 Test Tolerance and Derivation of Test Requirements (informative)

See TS 38.521-1 [17] Annex F.3.

F.1.3.1 Measurement of test environments

See TS 38.521-1 [17] Annex F.3.1.

F.1.3.2 Measurement of RRM requirements

Because the relationships between the test system uncertainties and the test tolerances are often complex, it is not always possible to give a simple derivation of the test requirement in this document. The analysis is recorded in 3GPP TR 38 903 [22].

The derivation of the test requirements for the EN-DC FR1 test cases in chapter 4 is defined in Table F.1.3.2-1.

The derivation of the test requirements for the NE-DC FR1 test cases in chapter 4 is defined in Table F.1.3.2-1a.

The derivation of the test requirements for the NR/5GC FR1 test cases in chapter 6 is defined in Table F.1.3.2-2.

The derivation of the test requirements for the EN-DC FR2 test cases in chapter 5 is defined in Table F.1.3.2-3.

The derivation of the test requirements for the NR/5GC FR2 test cases in chapter 7 is defined in Table F.1.3.2-4.

The derivation of the test requirements for the E-UTRA – NR inter-RAT with E-UTRA serving cell test cases in chapter 8 is defined in Table F.1.3.2-5.

The derivation of the test requirements for the FR1 NR sidelink test cases in chapter 9 is defined in Table F.1.3.2-6.

The derivation of the test requirements for the EN-DC FR1 test cases for shared spectrum in chapter 10 is defined in Table F.1.3.2-10.

The derivation of the test requirements for the NR/5GC FR1 test cases for shared spectrum in chapter 11 is defined in Table F.1.3.2-11.

The derivation of the test requirements for the E-UTRA – NR inter-RAT with E-UTRA serving cell test cases for shared spectrum in chapter 12 is defined in Table F.1.3.2-12.

The derivation of the test requirements for the NR/5GC FR1 test cases with SCell in shared spectrum in chapter 13 is defined in Table F.1.3.2-13.

The derivation of the test requirements for SA FR1 Satellite access test cases in chapter 14 is defined in Table F.1.3.2-14.

The derivation of the test requirements for the NR/5GC FR1 test cases for RedCap in chapter 16 is defined in Table F.1.3.2-7.

The derivation of the test requirements for the NR/5GC FR2 test cases for RedCap in chapter 17 is defined in Table F.1.3.2-8.

The derivation of the test requirements for the E-UTRA – NR inter-RAT with E-UTRA serving cell test cases for RedCap in chapter 18 is defined in Table F.1.3.2-9.

Table F.1.3.2-1: Derivation of test requirements for EN-DC FR1 RRM tests

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
4.3.2.2.1	Absolute uplink power: Normal conditions ±17dB Relative uplink power step: Normal conditions ±2.5dB Uplink timing:	 2.1dB 0.7dB 	Absolute uplink power: Normal conditions ±19.1dB Relative uplink power step: Normal conditions ±3.2dB Uplink timing:

	15kHz SCS T_e ±12*64*T_c 30kHz SCS T_e ±8*64*T_c	112T_c 112T_c	15kHz SCS T_e ±880*T_c 30kHz SCS Te ±624*T_c
4.3.2.2.2	Same as 4.3.2.2.1	Same as 4.3.2.2.1	Same as 4.3.2.2.1
4.3.2.2.3	Same as 4.3.2.2.1	Same as 4.3.2.2.1	Same as 4.3.2.2.1
4.3.2.2.4	Same as 4.3.2.2.1	Same as 4.3.2.2.1	Same as 4.3.2.2.1
4.4.1.1 EN-DC FR1 UE transmit timing accuracy	Test 1 (no DRX): Uplink timing: ±12*64 T_c for 15 KHz SSB SCS,15 kHz UL SCS ±10*64 T_c for 15 KHz SSB SCS,30 kHz UL SCS ±10*64 T_c for 15 KHz SSB SCS,60 kHz UL SCS ±8*64 T_c for 30 KHz SSB SCS,15 kHz UL SCS ±8*64 T_c for 30 KHz SSB SCS,30 kHz UL SCS ±7*64 T_c for 30 KHz SSB SCS,60 kHz UL SCS Max step size T_q: 5.5*64*T_c Min adjust rate T_p: 5.5*64*T_c Max adjust rate: 5.5*64*T_c $\hat{E}_{s2}$ / N_{oc}: +3.00dB N_{oc} = -98 dBm/15 kHz (Config 1,2,3) Test 2 (with DRX): ±12*64 T_c for 15 KHz SSB SCS,15 kHz UL SCS ±10*64 T_c for 15 KHz SSB SCS,30 kHz UL SCS ±10*64 T_c for 15 KHz SSB SCS,60 kHz UL SCS ±8*64 T_c for 30 KHz SSB SCS,15 kHz UL SCS ±8*64 T_c for 30 KHz SSB SCS,30 kHz UL SCS ±7*64 T_c for 30 KHz SSB SCS,60 kHz UL SCS $\hat{E}_{s2}$ / N_{oc}: +3.00dB	 ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c +0.5*64T_c -3.6*64*T_c +1.1*64*T_c +0.3 dB +1.5 dB ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c +0.3dB	 Test 1 (10MHz Ch BW): Uplink timing: ±13.75*64*T_c Uplink timing: ±11.75*64*T_c Uplink timing: ±11.75*64*T_c Uplink timing: ±9.75*64*T_c Uplink timing: ±9.75*64*T_c Uplink timing: ±8.75*64*T_c Max step size T_q: 6.0*64*T_c Min adjust rate: 1.9*64*T_c Max adjust rate: 6.6*64*T_c $\hat{E}_{s2}$ / N_{oc}: +3.30dB N_{oc} = -98 dBm/15 kHz (Config 1,2,3) +1.5 dB Test 2 (with DRX): Uplink timing: ±13.75*64*T_c Uplink timing: ±11.75*64*T_c Uplink timing: ±11.75*64*T_c Uplink timing: ±9.75*64*T_c Uplink timing: ±9.75*64*T_c Uplink timing: ±8.75*64*T_c $\hat{E}_{s2}$ / N_{oc}: +3.30dB
4.4.3.1 EN-DC FR1 timing advance adjustment accuracy	N_{oc} = -98 dBm/15 kHz (Config 1, 2, 4, 5) N_{oc} = -95 dBm/15 kHz (Config 3, 6) $\hat{E}_{sx}$ / N_{oc} = 3 dB UE Timing Advance Adjustment Accuracy for 15kHz SCS = ±256 T_c+ TT UE Timing Advance Adjustment Accuracy for 30kHz SCS = ±256 T_c+ TT	0 0 0 +/- 88 Tc +/- 88 Tc	N_{oc} = -98 dBm/15 kHz (Config 1, 2, 4, 5) N_{oc} = -95 dBm/15 kHz (Config 3, 6) $\hat{E}_{sx}$ / N_{oc} = 3 dB UE TAAA for 15kHz SCS = ±344 T_c UE TAAA for 30kHz SCS = ±344 T_c
4.5.1.1 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	SNR during T1: 1dB T2: -7dB T3: -15dB	Offset during T1: +0.8dB T2: +0.8dB T3: -0.8dB	SNR during T1: 1.8dB T2: -6.2dB T3: -15.8dB
4.5.1.2 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	SNR during T1: 1dB T2: -7dB T3: -15dB T4: -4.5dB T5: 1dB	Offset during T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: +0.8dB	SNR during T1: 1.8dB T2: -6.2dB T3: -15.8dB T4: -5.3dB T5: 1.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause D.4.1.1
4.5.1.3 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode	Same as 4.5.1.1	Same as 4.5.1.1	Same as 4.5.1.1
4.5.1.4 EN-DC FR1 radio link monitoring in-sync test for PSCell configured	Same as 4.5.1.2	Same as 4.5.1.2	Same as 4.5.1.2

with SSB-based RLM RS in DRX mode			
4.5.1.5 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	Same as 4.5.1.1	Same as 4.5.1.1	Same as 4.5.1.1
4.5.1.6 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	Same as 4.5.1.2	Same as 4.5.1.2	Same as 4.5.1.2
4.5.1.7 EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	Same as 4.5.1.1	Same as 4.5.1.1	Same as 4.5.1.1
4.5.1.8 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	Same as 4.5.1.2	Same as 4.5.1.2	Same as 4.5.1.2
4.5.1.9 EN-DC FR1 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion	SNR during T1: 1dB T2: 1dB T3: -15dB	Offset during T1: +0.8dB T2: +0.8dB T3: -0.8dB	SNR during T1: 1.8dB T2: 1.8dB T3: -15.8dB
4.5.2.1 EN-DC FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC	SNRs as specified	0.6dB	Formula: SNR + TT
4.5.2.2 EN-DC FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC	Same as 4.5.2.1	Same as 4.5.2.1	Same as 4.5.2.1
4.5.2.3 EN-DC FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC	During T1: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc2: +17dB Ês3 / Noc3: +17dB	During T1: 0dB 0dB 0dB 0dB	During T1: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc2: +17dB Ês3 / Noc3: +17dB
4.5.2.4 EN-DC FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC	Same as 4.5.2.3	Same as 4.5.2.3	Same as 4.5.2.3
4.5.2.5 EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB	During T1: 0dB 0dB 0dB 0dB	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_1$ / Noc1: +17dB $\hat{E}s_2$ / Noc2: +17dB $\hat{E}s_3$ / Noc3: +17dB
4.5.2.6 EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC	Same as 4.5.2.5	Same as 4.5.2.5	Same as 4.5.2.5
4.5.2.8	During T1: Noc2: -104dBm/15kHz	During T1: 0dB	During T1: Noc2: -104dBm/15kHz

	Noc3: -104dBm/15kHz Ês2 / Noc2: +17dB Ês3 / Noc3: +17dB	0dB 0dB 0dB	Noc3: -104dBm/15kHz Ês2 / Noc2: +17dB Ês3 / Noc3: +17dB
4.5.2.9	Same as 4.5.2.8	Same as 4.5.2.8	Same as 4.5.2.8
4.5.2.10 EN-DC FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell	During T1: Noc: -104dBm/15kHz $\hat{E}s_2$ / Noc: +17dB	During T1: 0dB 0dB	During T1: Noc: -104dBm/15kHz $\hat{E}s_2$ / Noc: +17dB
4.5.3.1 EN-DC FR1 SCell activation and deactivation of known SCell in non-DRX for 160ms SCell measurement cycle	During T1: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB During T2: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB During T3: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB	During T1: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB During T2: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB During T3: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB
4.5.3.2 EN-DC FR1 SCell activation and deactivation of known SCell in non-DRX for 640ms SCell measurement cycle	Same as 4.5.3.1	Same as 4.5.3.1	Same as 4.5.3.1
4.5.3.3 EN-DC FR1 SCell activation and deactivation of unknown SCell in non-DRX	Same as 4.5.3.1	Same as 4.5.3.1	Same as 4.5.3.1
4.5.3.4 SCell Activation and deactivation of multiple unknown SCells in FR1 with single activation/deactivation command	During T1: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz Noc_4: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: -infinity $\hat{E}s_4$ / Noc_4: -infinity During T2: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz Noc_4: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB $\hat{E}s_4$ / Noc_4: +17dB During T3: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz Noc_4: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB $\hat{E}s_4$ / Noc_4: +17dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB 0dB 0dB	During T1: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz Noc_4: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: -infinity $\hat{E}s_4$ / Noc_4: -infinity During T2: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz Noc_4: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB $\hat{E}s_4$ / Noc_4: +17dB During T3: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz Noc_4: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB $\hat{E}s_4$ / Noc_4: +17dB
4.5.3.5 EN-DC FR1 direct SCell activation at SCell addition of known SCell	During T1: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB During T2: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB	During T1: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB During T2: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz

	$\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB	0dB 0dB	$\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB
4.5.3.6 EN-DC FR1 fast SCell Activation of known SCell in non-DRX for 160ms SCell measurement cycle	During T1: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc2: +17dB Ês3 / Noc3: +17dB During T2: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc2: +17dB Ês3 / Noc3: +17dB In signaling: A3-offset = -15dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB In signaling: 0 dB	During T1: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc2: +17dB Ês3 / Noc3: +17dB During T2: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc2: +17dB Ês3 / Noc3: +17dB In signaling: A3-offset = -15dB
4.5.3.7 EN-DC FR1 fast SCell Activation of known SCell in non-DRX for 640 ms SCell measurement cycle	Same as 4.5.3.6	Same as 4.5.3.6	Same as 4.5.3.6
4.5.3.12 EN-DC FR1 Inter-band SSB-less SCell activation using A-TRS	Test Config 1,2,4,5: During T1: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc2: +10dB Ês3 / Noc3: +22dB During T2: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc2: +10dB Ês3 / Noc3: +22dB Test Config 3,6: During T1: Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês2 / Noc2: +10dB Ês3 / Noc3: +22dB During T2: Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês2 / Noc2: +10dB Ês3 / Noc3: +22dB	Test Config 1,2,4,5: During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB Test Config 3,6: During T1: 0dB 0dB 0dB -4dB During T2: 0dB 0dB 0dB -4dB	Test Config 1,2,4,5: During T1: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc2: +10dB Ês3 / Noc3: +22dB During T2: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc2: +10dB Ês3 / Noc3: +22dB Test Config 3,6: During T1: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc2: +10dB Ês3 / Noc3: +18dB During T2: Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês2 / Noc3: +10dB Ês3 / Noc3: +18dB
4.5.4.1 EN-DC FR1 UE UL carrier RRC reconfiguration delay	During T1: Noc2: -102dBm/15kHz Noc3: -102dBm/15kHz Ês2 / Noc2: +16dB Ês3 / Noc3: +16dB During T2: Noc2: -102dBm/15kHz Noc3: -102dBm/15kHz Ês2 / Noc2: +16dB Ês3 / Noc3: +16dB During T3: Noc2: -102dBm/15kHz Noc3: -102dBm/15kHz Ês2 / Noc2: +16dB Ês3 / Noc3: +16dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB	During T1: Noc2: -102dBm/15kHz Noc3: -102dBm/15kHz Ês2 / Noc2: +16dB Ês3 / Noc3: +16dB During T2: Noc2: -102dBm/15kHz Noc3: -102dBm/15kHz Ês2 / Noc2: +16dB Ês3 / Noc3: +16dB During T3: Noc2: -102dBm/15kHz Noc3: -102dBm/15kHz Ês2 / Noc2: +16dB Ês3 / Noc3: +16dB
4.5.5.1 EN-DC FR1 SSB-based beam failure	q0 SSB SNR during: T1: 5dB T2: -3dB	Offset during: T1: +0.8dB T2: +0.8dB	SNR during: T1: +5.8dB T2: -2.2dB

detection and link recovery in non-DRX	T3: -12dB T4: -12dB T5: -12dB q1 SSB during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1 SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1 SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10dB	T3: -0.8dB T4: -0.8dB T5: -0.8dB q1 SSB during T1: 0dB -0.2dB q1 SSB during T2: 0dB -0.2dB q1 SSB during T3, T4 and T5: 0dB +0.2dB	T3: -12.8dB T4: -12.8dB T5: -12.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3, T4 and T5 is modified as specified in clause D.4.1.1 q1 SSB during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1 SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1 SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10.2dB
4.5.5.2 EN-DC FR1 SSB-based beam failure detection and link recovery in DRX	Same as 4.5.5.1	Same as 4.5.5.1	Same as 4.5.5.1
4.5.5.3 EN-DC FR1 CSI-RS-based beam failure detection and link recovery in non-DRX	q0 CSI-RS SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB q1 CSI-RS during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1 CSI-RS during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1 CSI-RS during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10dB	Offset during: T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: -0.8dB q1 CSI-RS during T1: 0dB -0.2dB q1 CSI-RS during T2: 0dB -0.2dB q1 CSI-RS during T3, T4 and T5: 0dB +0.2dB	SNR during: T1: +5.8dB T2: -2.2dB T3: -12.8dB T4: -12.8dB T5: -12.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3, T4 and T5 is modified as specified in clause D.4.1.1 q1 CSI-RS during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1 CSI-RS during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1 CSI-RS during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10.2dB
4.5.5.4 EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX	Same as 4.5.5.3	Same as 4.5.5.3	Same as 4.5.5.3
4.5.5.5 EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX	q0 SSB SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB q1 SSB during T1:	Offset during: T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: -0.8dB q1 SSB during T1:	SNR during: T1: +5.8dB T2: -2.2dB T3: -12.8dB T4: -12.8dB T5: -12.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3, T4 and T5 is modified as specified in section D.4.1.1 q1 SSB during T1:

	Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1 SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1 SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10dB q1 CSI-RS during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1 CSI-RS during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1 CSI-RS during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10dB	0dB -0.2dB q1 SSB during T2: 0dB -0.2dB q1 SSB during T3, T4 and T5: 0dB +0.2dB q1 CSI-RS during T1: 0dB -0.2dB q1 CSI-RS during T2: 0dB -0.2dB q1 CSI-RS during T3, T4 and T5: 0dB +0.2dB	Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1 SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1 SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10.2dB q1 CSI-RS during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1 CSI-RS during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1 CSI-RS during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10.2dB
4.5.5.6 EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in DRX	Same as 4.5.5.5	Same as 4.5.5.5	Same as 4.5.5.5
4.5.5.7 EN-DC FR1 PSCell TRP specific SSB-based beam failure detection and link recovery in non-DRX	q0,0 SSB SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB q0,1 SSB SNR during: T1-T5: 5dB q1,0 and q1,1, SSB during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1,0 and q1,1, SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1,0 and q1,1, SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10dB	q0,0, Offset during: T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: -0.8dB q0,1, Offset during: T1-T5: +0.8dB q1,0 and q1,1, SSB during T1: 0dB -0.2dB q1,0 and q1,1, SSB during T2: 0dB -0.2dB q1,0 and q1,1, SSB during T3, T4 and T5: 0dB +0.2dB	q0,0, SNR during: T1: +5.8dB T2: -2.2dB T3: -12.8dB T4: -12.8dB T5: -12.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3, T4 and T5 is modified as specified in clause D.4.1.1 q0,1, SNR during: T1-T5: +5.8dB q1,0 and q1,1, SSB during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1,0 and q1,1, SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1,0 and q1,1, SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10.2dB
4.5.5.8 EN-DC FR1 SCell TRP specific CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX	q0,0 CSI-RS SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB	Offset during: T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: -0.8dB	SNR during: T1: +5.8dB T2: -2.2dB T3: -12.8dB T4: -12.8dB T5: -12.8dB For testing of a UE which supports 4RX on all bands, the

			SNR during T3, T4 and T5 is modified as specified in section D.4.1.1
	q0,1 CSI-RS SNR during: T1-T5: 5dB	q0,1, Offset during: T1-T5: +0.8dB	q0,1, SNR during: T1-T5: +5.8dB
	q1,0 SSB during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1,0 SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1,0 SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10dB q1,1 SSB during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1,1 SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1,1 SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10dB	q1,0 SSB during T1: 0dB -0.2dB q1,0 SSB during T2: 0dB -0.2dB q1,0 SSB during T3, T4 and T5: 0dB +0.2dB q1,1 SSB during T1: 0dB -0.2dB q1,1 SSB during T2: 0dB -0.2dB q1,1 SSB during T3, T4 and T5: 0dB +0.2dB	q1,0 SSB during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1,0 SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1,0 SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10.2dB q1,1 SSB during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1,1 SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1,1 SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10.2dB
4.5.6.1.1 EN-DC FR1 DCI-based DL active BWP switch in non-DRX in synchronous EN-DC	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB During T3: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB	During T1: 0dB 0dB During T2: 0dB 0dB During T3: 0dB 0dB	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB During T3: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB
4.5.6.1.2 EN-DC FR1 DCI-based DL active BWP switch with SCell in non-DRX in synchronous EN-DC	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB During T2: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB During T3: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB During T2: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB During T3: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB

4.5.6.2.1 EN-DC FR1 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB	During T1: 0dB 0dB	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB
4.5.6.3.1 Simultaneous E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in EN-DC on multiple CCs	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB During T2: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB During T3: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB During T2: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB During T3: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB
4.5.6.4.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC on multiple CCs	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB	During T1: 0dB 0dB 0dB 0dB	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB Noc_3: -104dBm/15kHz $\hat{E}s_3$ / Noc_3: +17dB: +17dB
4.5.7.1 EN-DC FR1 addition and release delay of known PSCell	For Test Configurations 1,2,4,5 N_{oc}: -85dBm/15kHz $\hat{E}_s$ / N_{oc}: 0.0dB B1-Threshold: -93 dBm/SCS For Test Configurations 3,6 N_{oc}: -85dBm/15kHz $\hat{E}_s$ / N_{oc}: 0.0dB B1-Threshold: -93 dBm/SCS	 0dB 0dB -3dB -4dB 0dB -3dB	 N_{oc}: -85dBm/15kHz $\hat{E}s$ / N_{oc}: 0.0dB B1-Threshold: -96 dBm/SCS N_{oc}: -89dBm/15kHz $\hat{E}s$ / N_{oc}: 0.0dB B1-Threshold: -96 dBm/SCS
4.5.8.1 EN-DC FR1 interruptions at switching between two uplink carriers	N_{oc}: -104dBm/15kHz $\hat{E}_s$ / N_{oc}: 14dB	0dB 0dB	N_{oc}: -104dBm/15kHz $\hat{E}s$ / N_{oc}: 14dB
4.5.9.1 UE specific CBW change on FR1 NR PSCell with non-DRX in synchronous EN- DC	N_{oc}: -104 dBm/15kHz $\hat{E}_s$ / N_{oc}: 17 dB	0dB 0dB	N_{oc}: -104 dBm/15kHz $\hat{E}_s$ / N_{oc}: 17 dB
4.5.10.1 EN-DC FR1 PSCell activation and deactivation delay	For Test Configurations 1,2,4,5 N_{oc}: -85dBm/15kHz $\hat{E}_s$ / N_{oc}: 0.0dB For Test Configurations 3,6 N_{oc}: -82dBm/15kHz $\hat{E}_s$ / N_{oc}: 0.0dB	 -3.6dB 0dB -3.6dB 0dB	 N_{oc}: -88.6dBm/15kHz $\hat{E}s$ / N_{oc}: 0.0dB N_{oc}: -85.6dBm/15kHz $\hat{E}s$ / N_{oc}: 0.0dB
4.5.11.1 EN-DC FR1 conditional PSCell addition delay	For Test Configurations 1,2,4,5 N_{oc}: -85 dBm/15kHz $\hat{E}_s$ / N_{oc}: 0.0dB B1-Threshold: -96 dBm/SCS For Test Configurations 3,6 N_{oc}: -85 dBm/15kHz $\hat{E}_s$ / N_{oc}: 0.0dB B1-Threshold: -93 dBm/SCS	 0dB 0dB 0dB -3.6dB 0dB -3dB	 N_{oc}: -85 dBm/15kHz $\hat{E}s$ / N_{oc}: 0.0dB B1-Threshold: -96 dBm/SCS N_{oc}: -88.6dBm/15kHz $\hat{E}s$ / N_{oc}: 0.0dB B1-Threshold: -96 dBm/SCS
4.6.1.1 EN-DC FR1 event-triggered reporting without gap in non-DRX	During T1: Noc: -98dBm/15kHz $\hat{E}s1$ / Noc: +4.00dB $\hat{E}s2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $\hat{E}s1$ / Noc: +4.00dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB	During T1: Noc: -98dBm/15kHz $\hat{E}s1$ / Noc: +4.00dB $\hat{E}s2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $\hat{E}s1$ / Noc: +4.00dB

	Ês2 / Noc: +4.00dB	0dB	Ês2 / Noc: +4.00dB
4.6.1.2 EN-DC FR1 event-triggered reporting without gap in DRX	Same as 4.6.1.1	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.3 EN-DC FR1 event-triggered reporting with gap in non-DRX	Same as 4.6.1.1	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.4 EN-DC FR1 event-triggered reporting with gap in DRX	Same as 4.6.1.1	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.5 EN-DC FR1 event-triggered reporting without gap in non-DRX with SSB time index detection	Same as 4.6.1.1	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.6 EN-DC FR1 event-triggered reporting with gap in non-DRX with SSB time index detection	Same as 4.6.1.1	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.7 EN-DC FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16	Same as 4.6.1.1	Same as 4.6.1.1	Same as 4.6.1.1
4.6.1.8 EN-DC FR1 event triggered reporting cell without SSB time index detection in DRX for UE configured with highSpeedMeasCA-Scell-r17	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB $Ês_3$ / Noc: -infinity During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB	During T1: 0dB 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB $Ês_3$ / Noc: -infinity During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB
4.6.2.1 EN-DC FR1-FR1 event-triggered reporting in non-DRX	During T1: Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz Ês2 / Noc: +4.00dB Ês3 / Noc: -infinity During T2: Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz Ês2 / Noc: +4.00dB Ês3 / Noc: +7.00dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz Ês2 / Noc: +4.00dB Ês3 / Noc: -infinity During T2: Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz Ês2 / Noc: +4.00dB Ês3 / Noc: +7.00dB
4.6.2.2 EN-DC FR1-FR1 event-triggered reporting in DRX	Same as 4.6.2.1	Same as 4.6.2.1	Same as 4.6.2.1
4.6.2.5 EN-DC FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection	Same as 4.6.2.1	Same as 4.6.2.1	Same as 4.6.2.1
4.6.2.6 EN-DC FR1-FR1 event-triggered reporting in DRX with SSB time index detection	Same as 4.6.2.1	Same as 4.6.2.1	Same as 4.6.2.1
4.6.2.9 EN-DC FR1-FR1 event triggered reporting without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17	Same as 4.6.2.1	Same as 4.6.2.1	Same as 4.6.2.1
4.6.4.1 EN-DC FR1 SSB-based L1-RSRP	During T1: Noc: -94.65dBm/15kHz	During T1: 0dB	During T1: Noc: -94.65dBm/15kHz

measurement in non-DRX	$\hat{E}_{s0}$ / Noc: +0.00dB $\hat{E}_{s1}$ / Noc: -infinity During T2: Noc: -94.65dBm/15kHz $\hat{E}_{s0}$ / Noc: 0.00dB $\hat{E}_{s1}$ / Noc: +3.00dB Reported SSB#0 SS-RSRP values ± 10dB Reported SSB#1 SS-RSRP values ± 10dB Reported Differential SS-RSRP values ± 3dB	0dB 0dB During T2: 0dB 0dB 0.5dB Via mapping	$\hat{E}_{s0}$ / Noc: +0.00dB $\hat{E}_{s1}$ / Noc: -infinity During T2: Noc: -94.65dBm/15kHz $\hat{E}_{s0}$ / Noc: 0.00dB $\hat{E}_{s1}$ / Noc: +3.50dB **For configuration 1,2,4,5** SSB#1: RSRP_55 to RSRP_75 SSB#0: DIFFRSRP_0 to DIFFRSRP_3 **For configuration 3,6** SSB#1: RSRP_58 to RSRP_78 SSB#0: DIFFRSRP_0 to DIFFRSRP_3
4.6.4.2 EN-DC FR1 SSB-based L1-RSRP measurement in DRX	Same as 4.6.4.1	Same as 4.6.4.1	Same as 4.6.4.1
4.6.4.3 EN-DC FR1 CSI-RS-based L1-RSRP measurement in non-DRX	Noc: -94.65dBm/15kHz $\hat{E}_{s0}$ / Noc: 0.00dB $\hat{E}_{s1}$ / Noc: +3.00dB Reported CSI-RSRP values ± 10dB Reported Differential CSI-RSRP values ± 3dB	0dB 0dB 0.5dB Via mapping	Noc: -94.65dBm/15kHz $\hat{E}_{s0}$ / Noc: 0.00dB $\hat{E}_{s1}$ / Noc: +3.50dB **For configuration 1,2,4,5** CSI-RS#1: RSRP_55 to RSRP_75 CSI-RS#0: DIFFRSRP_0 to DIFFRSRP_3 **For configuration 3,6** CSI-RS#1: RSRP_58 to RSRP_78 CSI-RS#0: DIFFRSRP_0 to DIFFRSRP_3
4.6.4.4 EN-DC FR1 CSI-RS-based L1-RSRP measurement in DRX	Same as 4.6.4.3	Same as 4.6.4.3	Same as 4.6.4.3
4.6.4.5 EN-DC FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16	Same as 4.6.4.1	Same as 4.6.4.1	Same as 4.6.4.1
4.6.5.1 EN-DC FR1 SRS-RSRP measurement with non-DRX	Test Configuration 1: T1: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = -infinity dB T2: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = +4dB Test Configuration 2: T1: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = -infinity dB T2: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = +4dB	Test Config 1: T1: 0dB 0dB T2: 0dB +5.25dB Test Config 2: T1: 0dB 0dB T2: 0dB +4.75dB	Test Configuration 1: T1: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = -infinity dB T2: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = +9.25dB Test Configuration 2: T1: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = -infinity dB T2: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = +8.75dB
4.6.5.2 EN-DC FR1 CLI-RSSI measurement with non-DRX	During T1: Noc on CLI RSSI: -116 dBm/15kHz Io on CLI RSSI : -97.43 dBm/ 1.08 MHz During T2: Noc on CLI RSSI: -108dBm/15kHz	During T1: 0dB 0dB During T2: 0dB	During T1: Noc: -116 dBm/15kHz Io on CLI RSSI : -97.43 dBm/ 1.08 MHz During T2: Noc: -116 dBm/15kHz

	Io on CLI RSSI : -89.43 dBm/ 1.08 Mhz	0.5dB	Io on CLI RSSI : -88.93 dBm/ 1.08 MHz
4.6.6.1 EN-DC intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC	During T1: Noc: -98dBm/15kHz $\hat{E}_{S2}$ / Noc: +4.00dB $\hat{E}_{S3}$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $\hat{E}_{S2}$ / Noc: +4.00dB $\hat{E}_{S3}$ / Noc: +4.00dB	During T1: 0dB 0dB During T2: 0dB 0dB 0dB	During T1: Noc: -98dBm/15kHz $\hat{E}_{S2}$ / Noc: +4.00dB $\hat{E}_{S3}$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $\hat{E}_{S2}$ / Noc: +4.00dB $\hat{E}_{S3}$ / Noc: +4.00dB
4.6.7.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in non-DRX	Noc: -94.65dBm/15kHz $\hat{E}_{S0}$ / Noc: 0.00dB $\hat{E}_{S1}$ / Noc: +3.00dB Reported CSI-SINR values ± 5.5dB Reported Differential CSI-SINR values ± 4.5dB	0dB 0dB 0dB Via mapping	Noc: -94.65dBm/15kHz $\hat{E}_{S0}$ / Noc: 0.00dB $\hat{E}_{S1}$ / Noc: +3.00dB **For configuration 1,2,3,4,5,6** CSI-RS#1: SINR_41 to SINR_64 CSI-RS#0: DIFFSINR_0 to DIFFSINR_7
4.6.7.2 EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR measurement in DRX	Noc: -94.65dBm/15kHz $\hat{E}_{S0}$ / Noc: 0.00dB $\hat{E}_{S1}$ / Noc: +3.00dB Reported SS-SINR values ±4.5dB Reported Differential SS-SINR values ±3.5dB	0dB 0dB 0dB Via mapping	Noc: -94.65dBm/15kHz $\hat{E}_{S0}$ / Noc: 0.00dB $\hat{E}_{S1}$ / Noc: +3.00dB **For configuration 1,2,3,4,5,6** SSB#1: SINR_43 to SINR_62 SSB#0: DIFFSINR_0 to DIFFSINR_6
4.6.7.3 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX	Noc: -94.65dBm/15kHz $\hat{E}_{S0}$ / Noc: 0.00dB $\hat{E}_{S1}$ / Noc: +3.00dB Reported CSI-SINR values ±4dB Reported Differential CSI-SINR values ±3dB	0dB 0.5dB 0dB Via mapping	Noc: -94.65dBm/15kHz $\hat{E}_{S0}$ / Noc: 0.50dB $\hat{E}_{S1}$ / Noc: +3.00dB **For configuration 1,2,3,4,5,6** CSI-RS#1: SINR_44 to SINR_61 CSI-RS#0: DIFFSINR_0 to DIFFSINR_5
4.7.1.1.1 EN-DC FR1 SS-RSRP absolute measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1: N_{oc}: -106dBm/15kHz $\hat{E}_{S2}$ / N_{oc}: +6.0dB $\hat{E}_{S3}$ / N_{oc}: +1.0dB Reported RSRP values: ±4.5dB Test 2: N_{oc}: -88dBm/15kHz $\hat{E}_{S2}$ / N_{oc}: +6.0dB $\hat{E}_{S3}$ / N_{oc}: +1.0dB Reported RSRP values: ±8dB Test 3: N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}_{S2}$ / N_{oc}: +3.0dB $\hat{E}_{S3}$ / N_{oc}: -1.0dB Reported RSRP values: ±6dB	Test 1: -1.5dB 0dB +0.4dB Via mapping Test 2: 0dB 0dB +0.4dB Via mapping Test 3: 0dB 0dB +0.2dB Via mapping	Test 1: N_{oc}: -107.5dBm/15kHz $\hat{E}_{S2}$ / N_{oc}: +6.0dB $\hat{E}_{S3}$ / N_{oc}: +1.4dB RSRP_44 to RSRP_56 Test 2: N_{oc}: -88dBm/15kHz $\hat{E}_{S2}$ / N_{oc}: +6.0dB $\hat{E}_{S3}$ / N_{oc}: +1.4dB RSRP_60 to RSRP_79 Test 3: N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}_{S2}$ / N_{oc}: +3.0dB $\hat{E}_{S3}$ / N_{oc}: -0.8dB RSRP_36 to RSRP_48 RSRP_36 to RSRP_48 RSRP_37 to RSRP_49 RSRP_37 to RSRP_49 RSRP_38 to RSRP_50 RSRP_39 to RSRP_51 RSRP_39 to RSRP_51 depending on operating band
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc}: -110dBm/30kHz $\hat{E}_{S2}$ / N_{oc}: +6.0dB $\hat{E}_{S3}$ / N_{oc}: +1.0dB	Test 1: -0.8dB 0dB +0.4dB	Test 1: N_{oc}: -110.8dBm/30kHz $\hat{E}_{S2}$ / N_{oc}: +6.0dB $\hat{E}_{S3}$ / N_{oc}: +1.4dB

	Reported RSRP values: ±4.5dBN.A Test 2: N_{oc}: -91dBm/30kHz $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +1.0dB Reported RSRP values: ±8dB Test 3: N_{oc}: -113dBm111dBm/30kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: -1.0dB Reported RSRP values: ±6dB	Via mappingN/A Test 2: 0dB 0dB +0.4dB Via mapping Test 3: 0dB-1dB 0dB +0.2dB Via mapping	RSRP_41 to RSRP_53N/A Test 2: N_{oc}: -91dBm/30kHz $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +1.4dB RSRP_57 to RSRP_76 Test 3: N_{oc}: -113dBm112dBm/30kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: -0.8dB RSRP_37 38 to RSRP_4950 RSRP_37 38 to RSRP_4950 RSRP_38 39 to RSRP_5051 RSRP_38 39 to RSRP_5051 RSRP_39 40 to RSRP_5152 RSRP_40 41 to RSRP_5253 RSRP_40 41 to RSRP_5253 depending on operating band
The derivation of the RSRP values takes into account the uncertainty in Cell 3 SS-RSRP from N_{oc} and $\hat{E}s_3$ / N_{oc}, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRP values given above are for normal conditions. In all cases the RSRP values are 4.5dB wider at each end for extreme conditions.			
4.7.1.1.2 EN-DC FR1 SS-RSRP relative measurement accuracy	Test 1: N_{oc}: Test configuration 1, 2, 4, 5:-106dBm/15kHz Test configuration 3, 6:-110dBm/30kHzN/A $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +1.0dB Reported relative SS-RSRP values: ±3dB Test 2: N_{oc}: -88dBm/15kHz $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +1.0dB Reported relative SS-RSRP values: ±3dB Test 3: N_{oc}: -116dBm114dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: -1.0dB Reported relative SS-RSRP values: ±3dB	Test 1: 0 dB 0 dB 0 dB +1.0dB Via mapping Test 2: 0dB 0dB +1.0dB Via mapping Test 3: 0dB 0dB +1.0dB Via mapping	Test 1: N_{oc}: -106 dBm/15kHz N_{oc}: -110 dBm/30kHz $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +2.0dB RSRP_x-8 to RSRP_x-1 Test 2: N_{oc}: -88dBm/15kHz $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +2.0dB RSRP_x-8 to RSRP_x-1 Test 3: N_{oc}: -116dBm114dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: 0dB RSRP_x-7 to RSRP_x+1
The derivation of the SS-RSRP values takes into account the uncertainty in Cell 2 and Cell 3 RSRP from N_{oc}, $\hat{E}s_2$ / N_{oc} and $\hat{E}s_3$ / N_{oc}, the allowed UE reporting accuracy, and the UE mapping function. The RSRP values given above are for both normal and extreme conditions.			
4.7.1.2.1 EN-DC FR1-FR1 SS-RSRP absolute measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: +10.0dB $\hat{E}s_3$ / N_{oc2}: +10.0dB Reported RSRP values: ±8dB Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc2}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: +13.0dB $\hat{E}s_3$ / N_{oc2}: -3.0dB Reported RSRP values: ±4.5dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz N_{oc2}: -94.65dBm/15kHz $\hat{E}s_2$ / N_{oc1}: +10.0dB $\hat{E}s_3$ / N_{oc2}: +10.0dB RSRP_62 to RSRP_81 Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc2}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: +13.0dB $\hat{E}s_3$ / N_{oc2}: -3.0dB RSRP_32 to RSRP_45 RSRP_33 to RSRP_45

			RSRP_33 to RSRP_46 RSRP_34 to RSRP_46 RSRP_34 to RSRP_47 RSRP_35 to RSRP_48 RSRP_36 to RSRP_48 depending on operating band
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: +10.0dB $\hat{E}s_3$ / N_{oc2}: +10.0dB Reported RSRP values: ±8dB Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: +13.0dB $\hat{E}s_3$ / N_{oc2}: -3.0dB Reported RSRP values: ±4.5dB	Test 1: -1.35dB -1.35dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -96dBm/15kHz N_{oc2}: -96dBm/15kHz $\hat{E}s_2$ / N_{oc1}: +10.0dB $\hat{E}s_3$ / N_{oc2}: +10.0dB RSRP_64 to RSRP_83 Test 2: N_{oc}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: +13.0dB $\hat{E}s_3$ / N_{oc2}: -3.0dB RSRP_35 to RSRP_48 RSRP_36 to RSRP_48 RSRP_36 to RSRP_49 RSRP_37 to RSRP_49 RSRP_37 to RSRP_50 RSRP_38 to RSRP_51 RSRP_39 to RSRP_51 depending on operating band
The derivation of the RSRP values takes into account the uncertainty in Cell 3 SS-RSRP from N_{oc2} and $\hat{E}s_3$ / N_{oc2}, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRP values given above are for normal conditions. For extreme conditions, the RSRP values are 3.0dB wider at each end for Test 1, and 4.5 dB wider at each for Test 2.			
4.7.1.2.2 EN-DC FR1-FR1 SS-RSRP relative measurement accuracy	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: +10.0dB $\hat{E}s_3$ / N_{oc2}: +10.0dB Reported relative RSRP values: ±4.5dB Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: +13.0dB $\hat{E}s_3$ / N_{oc2}: -3.0dB Reported relative RSRP values: ±4.5dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz N_{oc2}: -94.65dBm/15kHz $\hat{E}s_2$ / N_{oc1}: +10.0dB $\hat{E}s_3$ / N_{oc2}: +10.0dB RSRP_x-7 to RSRP_x+7 Test 2: N_{oc}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: +13.0dB $\hat{E}s_3$ / N_{oc2}: -3.0dB RSRP_x-31 to RSRP_x-18
The derivation of the SS-RSRP values takes into account the uncertainty in Cell 2 and Cell 3 RSRP from N_{oc}, $\hat{E}s_2$ / N_{oc} and $\hat{E}s_3$ / N_{oc}, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRP values given above are for normal conditions. For extreme conditions, the RSRP values are 1.5dB wider at each end.			
4.7.2.1 EN-DC FR1 SS-RSRQ measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1: N_{oc}: -85dBm/15kHz $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: +3.0dB Reported RSRQ values: ±2.5dB Test 2: N_{oc}: -101dBm/15kHz $\hat{E}s_2$ / N_{oc}: -2.9dB $\hat{E}s_3$ / N_{oc}: -2.9dB Reported RSRQ values: ±3.5dB Test 3: N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: -4.0dB	Test 1: -1.5dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB	Test 1: N_{oc}: -86.5dBm/15kHz $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: +3.0dB RSRQ_52 to RSRQ_62 Test 2: N_{oc}: -101dBm/15kHz $\hat{E}s_2$ / N_{oc}: -2.9dB $\hat{E}s_3$ / N_{oc}: -2.9dB RSRQ_46 to RSRQ_60 Test 3: N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: -4.0dB

	$\hat{E}s_3$ / N_{oc}: -4.0dB	0dB	$\hat{E}s_3$ / N_{oc}: -4.0dB
	Reported RSRQ values: ±3.5dB	Via mapping	RSRQ_44 to RSRQ_59
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc}: -91dBm/15kHz $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: +3.0dB Reported RSRQ values: ±2.5dB Test 2: N/A Test 3: N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: -4.0dB $\hat{E}s_3$ / N_{oc}: -4.0dB Reported RSRQ values: ±3.5dB	Test 1: -1.6dB 0dB 0dB Via mapping Test 2: N/A Test 3: 0dB 0dB 0dB Via mapping	Test 1: N_{oc}: -92.6dBm/15kHz $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: +3.0dB RSRQ_52 to RSRQ_62 Test 2: N/A Test 3: N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: -4.0dB $\hat{E}s_3$ / N_{oc}: -4.0dB RSRQ_44 to RSRQ_59
The derivation of the RSRQ values takes into account the uncertainty in Cell 3 SS-RSRQ from N_{oc} and $\hat{E}s_3$ / N_{oc}, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRQ values given above are for normal conditions. For extreme conditions, the SS-RSRQ values are 1.5dB wider at each end for Test 1, and 0.5 dB wider at each for Tests 2 and 3.			
4.7.2.2.1 EN-DC FR1-FR1 SS-RSRQ absolute measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1: N_{oc1}: -80.18 dBm/15kHz N_{oc2}: -80.18 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±2.5dB Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±2.5dB Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: 3dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±2.5dB	Test 1: -1.5dB -1.5dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -81.68dBm/15kHz N_{oc2}: -81.68dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_52 to RSRQ_62 Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_52 to RSRQ_62 Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: 3dB $\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_52 to RSRQ_62
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc1}: -86.27 dBm/15kHz N_{oc2}: -86.27 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±2.5dB Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±2.5dB Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: 3dB	Test 1: -1.53dB -1.53dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0dB	Test 1: N_{oc1}: -87.8dBm/15kHz N_{oc2}: -87.8dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_52 to RSRQ_62 Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_52 to RSRQ_62 Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: 3dB

	$\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±2.5dB	0dB Via mapping	$\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_52 to RSRQ_62
The derivation of the RSRQ values takes into account the uncertainty in Cell 3 SS-RSRQ from N_{oc2} and $\hat{E}s_3$ / N_{oc2}, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRQ values given above are for normal conditions. For extreme conditions, the RSRQ values are 1.5dB wider at each end.			
4.7.2.2.2 EN-DC FR1-FR1 SS-RSRQ relative measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1: N_{oc1}: -80.18 dBm/15kHz N_{oc2}: -80.18 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±3dB Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±3dB Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: 3dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±3dB	Test 1: -1.5dB -1.5dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -81.68dBm/15kHz N_{oc2}: -81.68dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_x-7 to RSRQ_x+7 Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_x-7 to RSRQ_x+7 Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: 3dB $\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_x-11 to RSRQ_x+2
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc1}: -86.27 dBm/15kHz N_{oc2}: -86.27 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±2.5dB Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±3dB Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: 3dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported RSRQ values: ±3dB	Test 1: -1.53dB -1.53dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -87.8dBm/15kHz N_{oc2}: -87.8dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_x-7 to RSRQ_x+7 Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_x-7 to RSRQ_x+7 Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: 3dB $\hat{E}s_3$ / N_{oc2}: -1.75dB RSRQ_x-11 to RSRQ_x+2
The derivation of the RSRQ values takes into account the uncertainty in Cell 2 and Cell 3 SS-RSRQ from N_{oc2} and $\hat{E}s_3$ / N_{oc2}, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRQ values given above are for normal conditions. For extreme conditions, the RSRQ values are 1dB wider at each end.			
4.7.3.1 EN-DC FR1 SS-SINR measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1: N_{oc}: -93dBm/15kHz $\hat{E}s_2$ / N_{oc}: +4.54dB $\hat{E}s_3$ / N_{oc}: +4.54dB Reported SINR values: ±3.5dB Test 2:	Test 1: 0dB 0dB 0dB Via mapping Test 2:	Test 1: N_{oc}: -93dBm/15kHz $\hat{E}s_2$ / N_{oc}: +4.54dB $\hat{E}s_3$ / N_{oc}: +4.54dB SINR_31 to SINR_49 Test 2:

	N_{oc}: -116dBm/15kHz+ Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: -4dB $\hat{E}s_3$ / N_{oc}: -4dB Reported SINR values: ±3.5dB	0dB 0.5dB 0.5dB Via mapping	N_{oc}: -116dBm/15kHz+ Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: -3.5dB $\hat{E}s_3$ / N_{oc}: -3.5dB SINR_28 to SINR_45
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc}: -93dBm/15kHz $\hat{E}s_2$ / N_{oc}: +4.54dB $\hat{E}s_3$ / N_{oc}: +4.54dB Reported SINR values: ±3.5dB Test 2: N_{oc}: -116dBm/15kHz+ Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: -4dB $\hat{E}s_3$ / N_{oc}: -4dB Reported SINR values: ±3.5dB	Test 1: -0.2dB 0dB 0dB Via mapping Test 2: 0dB 0.5dB 0.5dB Via mapping	Test 1: N_{oc}: -93.2dBm/15kHz $\hat{E}s_2$ / N_{oc}: +4.54dB $\hat{E}s_3$ / N_{oc}: +4.54dB SINR_31 to SINR_49 Test 2: N_{oc}: -116dBm/15kHz+ Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: -3.5dB $\hat{E}s_3$ / N_{oc}: -3.5dB SINR_28 to SINR_45
The derivation of the SINR values takes into account the uncertainty in Cell 3 SS- SINR from N_{oc} and $\hat{E}s_3$ / N_{oc}, the allowed UE reporting accuracy, and the UE mapping function. The SS- SINR values given above are for normal conditions. For extreme conditions, the SS- SINR values are 0.5dB wider at each end.			
4.7.3.2.1 EN-DC FR1-FR1 SS-SINR absolute measurement accuracy	**TEST CONFIGURATION 1, 2, 3, 4, 5, 6**		
	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported SINR values: ±3dB Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s_2$ / N_{oc1}: 20dB $\hat{E}s_3$ / N_{oc2}: 20dB Reported SINR values: ±3dB Test 3: N_{oc1}: -119.5dBm/15kHz + Δ_{BG_offset} N_{oc2}: -119.5dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: -4dB $\hat{E}s_3$ / N_{oc2}: -4dB Reported SINR values: ±3.5dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0.8dB 0.8dB Via mapping	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB SINR_35 to SINR_51 Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s_2$ / N_{oc1}: 20dB $\hat{E}s_3$ / N_{oc2}: 20dB SINR_79 to SINR_94 Test 3: N_{oc1}: -119.5dBm/15kHz + Δ_{BG_offset} N_{oc2}: -119.5dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: -3.2dB $\hat{E}s_3$ / N_{oc2}: -3.2dB SINR_32 to SINR_49
The derivation of the SINR values takes into account the uncertainty in Cell 3 SS- SINR from N_{oc} and $\hat{E}s_3$ / N_{oc}, the allowed UE reporting accuracy, and the UE mapping function. The SS- SINR values given above are for normal conditions. For extreme conditions, the SS- SINR values are 1dB wider at each for Tests 1 and 2 and 0.5dB wider at each end for Test 3.			
4.7.3.2.2 EN-DC FR1-FR1 SS-SINR relative measurement accuracy	**TEST CONFIGURATION 1, 2, 3, 4, 5, 6**		
	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB Reported SINR values: ±3.5dB Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s_2$ / N_{oc1}: 20dB $\hat{E}s_3$ / N_{oc2}: 20dB Reported SINR values: ±3.5dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: -1.75dB $\hat{E}s_3$ / N_{oc2}: -1.75dB SINR_x-10 to SINR_x+10 Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s_2$ / N_{oc1}: 20dB $\hat{E}s_3$ / N_{oc2}: 20dB SINR_x-10 to SINR_x+10

	Test 3: N_{oc1}: -119.5dBm/15kHz + Δ_{BG_offset} N_{oc2}: -119.5dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: -4dB $\hat{E}s_3$ / N_{oc2}: -4dB Reported SINR values: ±4dB	Test 3: 0dB 0dB 0.8dB 0.8dB Via mapping	Test 3: N_{oc1}: -119.5dBm/15kHz + Δ_{BG_offset} N_{oc2}: -119.5dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: -3.2dB $\hat{E}s_3$ / N_{oc2}: -3.2dB SINR_x-11 to SINR_x+11
The derivation of the SINR values takes into account the uncertainty in Cell 3 SS- SINR from N_{oc} and $\hat{E}s_3$ / N_{oc}, the allowed UE reporting accuracy, and the UE mapping function. The SS- SINR values given above are for normal conditions. For extreme conditions, the SS- SINR values are 0.5dB wider at each for Tests 1 and 2 and 0dB wider at each end for Test 3.			
4.7.4.1.1 EN-DC FR1 SSB based L1-RSRP absolute measurement accuracy			
Test Configuration 1,2,4,5	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: 10dB Reported L1-RSRP values: ±8.5dB (±3dB additionally for extreme conditions) Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: -3dB Reported L1-RSRP values: ±5dB (±4.5dB additionally for extreme conditions)	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz $\hat{E}s_2$ / N_{oc1}: 10dB RSRP_62 to RSRP_82 Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: -2.2dB RSRP_31 to RSRP_44 RSRP_31 to RSRP_45 RSRP_32 to RSRP_45 RSRP_32 to RSRP_46 RSRP_33 to RSRP_46 RSRP_34 to RSRP_47 RSRP_34 to RSRP_48 depending on operating band
Test Configuration 3,6	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: 10dB Reported L1-RSRP values: ±8.5dB (±3dB additionally for extreme conditions) Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: -3dB Reported L1-RSRP values: ±5dB (±4.5dB additionally for extreme conditions)	Test 1: -1.35dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -96dBm/15kHz $\hat{E}s_2$ / N_{oc1}: 10dB RSRP_63 to RSRP_84 Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: -2.2dB RSRP_34 to RSRP_47 RSRP_34 to RSRP_48 RSRP_35 to RSRP_48 RSRP_35 to RSRP_49 RSRP_36 to RSRP_49 RSRP_37 to RSRP_50 RSRP_37 to RSRP_51 depending on operating band
4.7.4.1.2 EN-DC FR1 SSB based L1-RSRP relative measurement accuracy			
Test Configuration 1,2,4,5	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: 10dB Reported differential L1-RSRP values for normal conditions: -4.6dB to 0dB Reported differential L1-RSRP values for extreme conditions: -5.6dB to 0dB Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: -3dB Reported differential L1-RSRP values for normal conditions: -4.6dB to 0dB	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz $\hat{E}s_2$ / N_{oc1}: 10dB DIFFRSRP_0 to DIFFRSRP_2 DIFFRSRP_0 to DIFFRSRP_2 Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: -2.2dB DIFFRSRP_0 to DIFFRSRP_2 DIFFRSRP_0 to DIFFRSRP_2

	Reported differential L1-RSRP values for extreme conditions: -5.6dB to 0dB		
Test Configuration 3,6	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB Reported differential L1-RSRP values for normal conditions: -4.6dB to 0dB Reported differential L1-RSRP values for extreme conditions: -5.6dB to 0dB Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}_{s2}$ / N_{oc1}: -3dB Reported differential L1-RSRP values for normal conditions: -4.6dB to 0dB Reported differential L1-RSRP values for extreme conditions: -5.6dB to 0dB	Test 1: -1.35dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -96dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB DIFFRSRP_0 to DIFFRSRP_2 DIFFRSRP_0 to DIFFRSRP_2 Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}_{s2}$ / N_{oc1}: -2.2dB DIFFRSRP_0 to DIFFRSRP_2 DIFFRSRP_0 to DIFFRSRP_2
4.7.4.2.1 EN-DC FR1 CSI-RS based L1-RSRP absolute measurement accuracy	Same as 4.7.4.1.1	Same as 4.7.4.1.1	Same as 4.7.4.1.1
4.7.4.2.2 EN-DC FR1 CSI-RS based L1-RSRP relative measurement accuracy	Same as 4.7.4.1.2	Same as 4.7.4.1.2	Same as 4.7.4.1.2
4.7.5.1 EN-DC FR1 SFTD measurement accuracy	N_{oc1}: -104dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: -3.0dB N_{oc2}: -104dBm/15kHz $\hat{E}_{s2}$ / N_{oc2}: 17.0dB	0dB 0.3dB 0dB 0dB	N_{oc1}: -104dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: -2.7dB N_{oc2}: -104dBm/15kHz $\hat{E}_{s2}$ / N_{oc2}: 17.0dB
4.7.6.1 EN-DC FR1 SRS-RSRP measurement accuracy	Test Configuration 1: Test 1: N_{oc} = -106dBm/15kHz $\hat{E}_s$ / N_{oc} = +1dB Reported SRS-RSRP values: ±3dB Test 2: N_{oc} = -88dBm/15kHz $\hat{E}_s$ / N_{oc} = +1dB Reported SRS-RSRP values: ±6.5dB Test 3: N_{oc} = -114+Δ_{BG_offset} dBm/15kHz $\hat{E}_s$ / N_{oc} = +1dB Reported SRS-RSRP values: ±3dB Test Configuration 2: Test 1: Test 1 is not used when configuring SCS 30kHz Test 2: N_{oc} = -91dBm/15kHz $\hat{E}_s$ / N_{oc} = +1dB Reported SRS-RSRP values: ±7dB Test 3: N_{oc} = -114+ Δ_{BG_offset} dBm/15kHz $\hat{E}_s$ / N_{oc} = +1dB Reported SRS-RSRP values: ±3.5dB	Test Config 1: Test 1: 0dB +0.5dB Via mapping Test 2: 0dB +0.5dB Via mapping Test 3: 0dB +0.75dB for BG_A +0.5dB otherwise Via mapping Test Config 2: Test 1: N/A Test 2: 0dB +0.5dB Via mapping Test 3: 0dB +1.25dB for BG_A +0.5dB otherwise Via mapping	Test Config 1: Test 1: N_{oc} = -106dBm/15kHz $\hat{E}_s$ / N_{oc} = +1.5dB Reported SRS-RSRP: 30 to 41 Test 2: N_{oc} = -88dBm/15kHz $\hat{E}_s$ / N_{oc} = +1.5dB Reported SRS-RSRP: 45 to 62 Test 3: N_{oc} = -114+Δ_{BG_offset} dBm/15kHz $\hat{E}_s$ / N_{oc} = +1.75dB for BG_A $\hat{E}_s$ / N_{oc} = +1.5dB otherwise Reported SRS-RSRP: BG_A: 23 to 33 BG_C: 23 to 34 BG_D: 24 to 34 BG_E: 24 to 35 Test Config 2: Test 1: N/A Test 2: N_{oc} = -91dBm/15kHz $\hat{E}_s$ / N_{oc} = +1.5dB Reported SRS-RSRP: 44 to 63 Test 3: N_{oc} = -114+Δ_{BG_offset} dBm/15kHz $\hat{E}_s$ / N_{oc} = +2.25dB for BG_A $\hat{E}_s$ / N_{oc} = +1.5dB otherwise Reported SRS-RSRP: BG_A: 26 to 37

			BG_C: 26 to 37 BG_D: 26 to 38 BG_E: 27 to 38
4.7.7.1.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy			
Test Configuration 1,2,4,5	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB Reported CSI-SINR values: ±5.5dB (±1dB additionally for extreme conditions) Test 2: N_{oc1}: -119.5dBm/15kHz + ΔBG_offset $\hat{E}_{s2}$ / N_{oc1}: -3dB Reported CSI-SINR values: ±5.5dB (±1dB additionally for extreme conditions)	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB All bands: L1-SINR_28 to L1-SINR_57 Test 2: N_{oc1}: -119.2dBm/15kHz + Δ_{BG_offset} $\hat{E}_{s2}$ / N_{oc1}: -2.2dB All bands: L1-SINR_27 to L1-SINR_58
Test Configuration 3,6	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB Reported CSI-SINR values: ±5.5dB (±1dB additionally for extreme conditions) Test 2: N_{oc1}: -119.5dBm/15kHz + ΔBG_offset $\hat{E}_{s2}$ / N_{oc1}: -3dB Reported CSI-SINR values: ±5.5dB (±1dB additionally for extreme conditions)	Test 1: -1.35dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -96dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB All bands: L1-SINR_28 to L1-SINR_57 Test 2: N_{oc1}: -116.2dBm/15kHz + ΔBG_offset $\hat{E}_{s2}$ / N_{oc1}: -2.2dB All bands: L1-SINR_27 to L1-SINR_58
4.7.7.1.2 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR relative measurement accuracy			
Same as 4.7.7.1.1	Same as 4.7.7.1.1	Same as 4.7.7.1.1	Test 1: N_{oc1}: -94.65dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB L1-SINR_x-9 to L1-SINR_x+9 Test 2: N_{oc1}: -119.2dBm/15kHz + Δ_{BG_offset} $\hat{E}_{s2}$ / N_{oc1}: -2.2dB L1-SINR_x-9 to L1-SINR_x+9
Same as 4.7.7.1.1	Same as 4.7.7.1.1	Same as 4.7.7.1.1	Test 1: N_{oc1}: -96dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB L1-SINR_x-9 to L1-SINR_x+9 Test 2: N_{oc1}: -116.2dBm/15kHz + ΔBG_offset $\hat{E}_{s2}$ / N_{oc1}: -2.2dB L1-SINR_x-9 to L1-SINR_x+9
4.7.7.2 EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy			
Test Configuration 1,2,4,5	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB Reported SS-SINR values: ±4.5dB (±1dB additionally for extreme conditions) Test 2: N_{oc1}: -119.5dBm/15kHz + ΔBG_offset	Test 1: 0dB 0dB Via mapping Test 2: 0dB	Test 1: N_{oc1}: -94.65dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB All bands: L1-SINR_30 to L1-SINR_55 Test 2:

	$\hat{E}_{s2}$ / N_{oc1}: -3dB Reported SS-SINR values: ±4.5dB (±1dB additionally for extreme conditions)	0.8dB Via mapping	N_{oc1}: -119.2dBm/15kHz + Δ_{BG_offset} $\hat{E}_{s2}$ / N_{oc1}: -2.2dB All bands: L1-SINR_29 to L1-SINR_56
Test Configuration 3,6	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB Reported CSI-SINR values: ±4.5dB (±1dB additionally for extreme conditions) Test 2: N_{oc1}: -119.5dBm/15kHz + ΔBG_offset $\hat{E}_{s2}$ / N_{oc1}: -3dB Reported CSI-SINR values: ±4.5dB (±1dB additionally for extreme conditions)	Test 1: -1.35dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -96dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB All bands: L1-SINR_30 to L1-SINR_55 Test 2: N_{oc1}: -116.2dBm/15kHz + ΔBG_offset $\hat{E}_{s2}$ / N_{oc1}: -2.2dB All bands: L1-SINR_29 to L1-SINR_56
4.7.7.3.1 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR absolute measurement accuracy			
Test Configuration 1,2,4,5	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB Reported CSI-SINR values: ±4.5dB (±1dB additionally for extreme conditions) Test 2: N_{oc1}: -119.5dBm/15kHz + ΔBG_offset $\hat{E}_{s2}$ / N_{oc1}: -3dB Reported CSI-SINR values: ±4.5dB (±1dB additionally for extreme conditions)	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB All bands: L1-SINR_30 to L1-SINR_55 Test 2: N_{oc1}: -119.2dBm/15kHz + Δ_{BG_offset} $\hat{E}_{s2}$ / N_{oc1}: -2.2dB All bands: L1-SINR_29 to L1-SINR_56
Test Configuration 3,6	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB Reported CSI-SINR values: ±4.5dB (±1dB additionally for extreme conditions) Test 2: N_{oc1}: -119.5dBm/15kHz + ΔBG_offset $\hat{E}_{s2}$ / N_{oc1}: -3dB Reported CSI-SINR values: ±4.5dB (±1dB additionally for extreme conditions)	Test 1: -1.35dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -96dBm/15kHz $\hat{E}_{s2}$ / N_{oc1}: 10dB All bands: L1-SINR_30 to L1-SINR_55 Test 2: N_{oc1}: -116.2dBm/15kHz + ΔBG_offset $\hat{E}_{s2}$ / N_{oc1}: -2.2dB All bands: L1-SINR_29 to L1-SINR_56
4.7.7.3.2 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR relative measurement accuracy			
Same as 4.7.7.1.2	Same as 4.7.7.1.2	Same as 4.7.7.1.2	Same as 4.7.7.1.2
Same as 4.7.7.1.2	Same as 4.7.7.1.2	Same as 4.7.7.1.2	Same as 4.7.7.1.2
4.7.8.1 EN-DC FR1 CSI-RSRP absolute measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1: N_{oc}: -106dBm/15kHz $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +1.0dB Reported RSRP values: ±4.5dB Test 2: N_{oc}: -88dBm/15kHz $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +1.0dB Reported RSRP values: ±8dB Test 3:	Test 1: -1.5dB 0dB +0.4dB Via mapping Test 2: 0dB 0dB +0.4dB Via mapping Test 3:	Test 1: N_{oc}: -107.5dBm/15kHz $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +1.4dB RSRP_44 to RSRP_56 Test 2: N_{oc}: -88dBm/15kHz $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +1.4dB RSRP_60 to RSRP_79 Test 3:

	N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: -1.0dB Reported RSRP values: ±6dB	0dB 0dB +0.2dB Via mapping	N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: -0.8dB RSRP_36 to RSRP_49 RSRP_37 to RSRP_49 RSRP_37 to RSRP_50 RSRP_38 to RSRP_50 RSRP_38 to RSRP_51 RSRP_39 to RSRP_51 RSRP_39 to RSRP_52 RSRP_40 to RSRP_52 depending on operating band
	TEST CONFIGURATION 3, 6		
	Test 2: N_{oc}: -91dBm/30kHz $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +1.0dB Reported RSRP values: ±8dB Test 3: N_{oc}: -111dBm/30kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: -1.0dB Reported RSRP values: ±6dB	Test 2: 0dB 0dB +0.4dB Via mapping Test 3: 0dB 0dB +0.2dB Via mapping	Test 2: N_{oc}: -91dBm/30kHz $\hat{E}s_2$ / N_{oc}: +6.0dB $\hat{E}s_3$ / N_{oc}: +1.4dB RSRP_57 to RSRP_76 Test 3: N_{oc}: -111dBm/30kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc}: +3.0dB $\hat{E}s_3$ / N_{oc}: -0.8dB RSRP_39 to RSRP_51 RSRP_39 to RSRP_51 RSRP_40 to RSRP_52 RSRP_40 to RSRP_52 RSRP_41 to RSRP_53 RSRP_41 to RSRP_53 RSRP_41 to RSRP_53 RSRP_41 to RSRP_53 depending on operating band
The derivation of the RSRP values takes into account the uncertainty in Cell 3 CSI-RSRP from N_{oc} and $\hat{E}s_3$ / N_{oc}, the allowed UE reporting accuracy, and the UE mapping function. The CSI-RSRP values given above are for normal conditions. In all cases the RSRP values are 4.5dB wider at each end for extreme conditions.			
4.7.8.2 EN-DC FR1-FR1 SS-RSRP absolute measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: +10.0dB $\hat{E}s_3$ / N_{oc2}: +10.0dB Reported RSRP values: ±8dB Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc2}: -115dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: +13.0dB $\hat{E}s_3$ / N_{oc2}: -3.0dB Reported RSRP values: ±4.5dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz N_{oc2}: -94.65dBm/15kHz $\hat{E}s_2$ / N_{oc1}: +10.0dB $\hat{E}s_3$ / N_{oc2}: +10.0dB RSRP_62 to RSRP_81 Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc2}: -115dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: +13.0dB $\hat{E}s_3$ / N_{oc2}: -3.0dB RSRP_32 to RSRP_45 RSRP_33 to RSRP_45 RSRP_33 to RSRP_46 RSRP_34 to RSRP_46 RSRP_34 to RSRP_47 RSRP_35 to RSRP_47 RSRP_35 to RSRP_48 RSRP_36 to RSRP_48 depending on operating band
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz $\hat{E}s_2$ / N_{oc1}: +10.0dB	Test 1: -1.35dB -1.35dB 0dB	Test 1: N_{oc1}: -96dBm/15kHz N_{oc2}: -96dBm/15kHz $\hat{E}s_2$ / N_{oc1}: +10.0dB

	$\hat{E}s_3$ / N_{oc2}: +10.0dB Reported RSRP values: ±8dB Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -115dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: +13.0dB $\hat{E}s_3$ / N_{oc2}: -3.0dB Reported RSRP values: ±4.5dB	0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	$\hat{E}s_3$ / N_{oc2}: +10.0dB RSRP_64 to RSRP_83 Test 2: N_{oc}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -115dBm/15kHz + Δ_{BG_offset} $\hat{E}s_2$ / N_{oc1}: +13.0dB $\hat{E}s_3$ / N_{oc2}: -3.0dB RSRP_35 to RSRP_48 RSRP_36 to RSRP_48 RSRP_36 to RSRP_49 RSRP_37 to RSRP_49 RSRP_37 to RSRP_50 RSRP_38 to RSRP_50 RSRP_38 to RSRP_51 RSRP_39 to RSRP_51 depending on operating band
The derivation of the RSRP values takes into account the uncertainty in Cell 3 CSI-RSRP from N_{oc2} and $\hat{E}s_3$ / N_{oc2}, the allowed UE reporting accuracy, and the UE mapping function. The CSI-RSRP values given above are for normal conditions. For extreme conditions, the RSRP values are 3.0dB wider at each end for Test 1, and 4.5 dB wider at each for Test 2.			

Table F.1.3.2-1a: Derivation of test requirements for NE-DC FR1 RRM tests

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
4A.1.1.1 NE-DC FR1 addition and release delay of known PSCell	Noc: -104dBm/15kHz $\hat{E}s$ / Noc: +17dB B1 Threshold Test Configuration 1, 2, 4, 5: -96 dBm/15kHz Test Configuration 3,6: -93 dBm/15kHz	0dB 0dB -1dB -4dB	Noc: -104dBm/15kHz $\hat{E}s$ / Noc: +17dB Test Configuration 1, 2, 4, 5: -97 dBm/15kHz Test Configuration 3,6: -97 dBm/15kHz
4A.2.1.1 NE-DC FR1 SFTD accuracy	Noc1: Test Configuration 1, 2, 4, 5: -104dBm/15kHz Test Configuration 3,6: -101dBm/15kHz $\hat{E}s1$ / Noc1: -3dB Noc2: -104dBm/15kHz $\hat{E}s2$ / Noc2: +17dB	0dB 0dB 0.3dB 0dB 0dB	Noc1: Test Configuration 1, 2, 4, 5: -104dBm/15kHz Test Configuration 3,6: -101dBm/15kHz $\hat{E}s1$ / Noc1: -2.7dB Noc2: -104dBm/15kHz $\hat{E}s2$ / Noc2: +17dB

Table F.1.3.2-2: Derivation of test requirements for NR SA FR1 RRM tests

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
6.1.1.1 NR SA FR1 cell re-selection	During T1: Noc: -98dBm/15kHz $\hat{E}s1$ / Noc: +16dB $\hat{E}s2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $\hat{E}s1$ / Noc: +13dB $\hat{E}s2$ / Noc: +16dB During T3: Noc: -98dBm/15kHz $\hat{E}s1$ / Noc: +16dB $\hat{E}s2$ / Noc: +13dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0.45dB During T3: 0dB 0.45dB 0dB	During T1: Noc: -98dBm/15kHz $\hat{E}s1$ / Noc: +16dB $\hat{E}s2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $\hat{E}s1$ / Noc: +13dB $\hat{E}s2$ / Noc: +16.45dB During T3: Noc: -98dBm/15kHz $\hat{E}s1$ / Noc: +16.45dB $\hat{E}s2$ / Noc: +13dB
6.1.1.2 NR SA FR1-FR1 cell re-selection	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz	During T1: 0dB -2dB	During T1: Noc1: -98dBm/15kHz Noc2: -100dBm/15kHz

	Ês1 / Noc1: +14dB Ês2 / Noc2: -4dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: +12dB	1.6dB 0.4dB During T2: 0dB 0dB 1.6dB 0dB During T3: 0dB 0dB 1.6dB 1.6dB	Ês1 / Noc1: +15.6dB Ês2 / Noc2: -3.6dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: 13.6dB
6.1.1.3 NR SA FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16dB During T2: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: +13dB In Signalling SSearchDeltaP = 3dB	During T1: 0dB -0.45dB 0dB During T2: 0dB 0dB -0.45dB In Signalling 3dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +12.55dB Ês2 / Noc: +16dB During T2: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: +12.55dB In Signalling SSearchDeltaP = 6dB
6.1.1.4 NR SA FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16dB During T2: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: +13dB	During T1: 0dB -0.45dB 0dB During T2: 0dB 0dB -0.45dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +12.55dB Ês2 / Noc: +16dB During T2: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: +12.55dB
6.1.1.5 NR SA FR1-FR1 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	During T1: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: -4dB During T2: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: +12dB In signalling: Thresh_X_HighP of Cell 1 = 48dB Thresh_X_HighP of Cell 2 = 48dB Thresh_X_LowP of Cell 1 = 50dB Thresh_X_LowP of Cell 2 = 50dB Thresh_Serving_LowP of Cell 1 = 44dB Thresh_Serving_LowP of Cell 2 = 44dB SSearchDeltaP of Cell 1 = 3dB SSearchDeltaP of Cell 2 = 3dB	During T1: 0dB 0dB 0dB 0.3dB During T2: 0dB 0dB 0dB -2.25dB In signalling: 0dB -4dB -2dB 0dB 0dB 2dB 0dB 12dB	During T1: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: -3.7dB During T2: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc1: -98dBm/15kHz Ês2 / Noc2: +9.75dB In signalling: Thresh_X_HighP of Cell 1 = 48dB Thresh_X_HighP of Cell 2 = 44dB Thresh_X_LowP of Cell 1 = 48dB Thresh_X_LowP of Cell 2 = 50dB Thresh_Serving_LowP of Cell 1 = 44dB Thresh_Serving_LowP of Cell 2 = 46dB SSearchDeltaP of Cell 1 = 3dB SSearchDeltaP of Cell 2 = 15dB
6.1.1.6 NR SA FR1-FR1 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	During T1: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: -4dB	During T1: 0dB 2dB -2dB 0.35dB	During T1: Noc1: -98dBm/15kHz Ês1 / Noc1: +16dB Noc2: -100dBm/15kHz Ês2 / Noc2: -3.65dB

	During T2: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: +12dB In signalling: SSearchThresholdP of Cell 1 = 50dB SSearchThresholdP of Cell 2 = 50dB	During T2: 0dB 0dB -2dB 4dB In signalling: 0dB -16dB	During T2: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc1: -100dBm/15kHz Ês2 / Noc2: +16dB In signalling: SSearchThresholdP of Cell 1 = 50dB SSearchThresholdP of Cell 2 = 34dB
6.1.1.7 NR SA FR1 cell re-selection for UE configured with highSpeedMeasFlag-r16	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: +13dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0.45dB During T3: 0dB 0.45dB 0dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16.45dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +16.45dB Ês2 / Noc: +13dB
6.1.1.8 NR SA FR1-FR1 Cell reselection for UE configured with highSpeedMeasInterFreq-r17	Same as 6.1.1.2	Same as 6.1.1.2	Same as 6.1.1.2
6.1.1.9 NR SA FR1 cell reselection to intra-frequency NR case for UE operating on a cell with less than 5MHz BW	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: +13dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0.45dB During T3: 0dB 0.45dB 0dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16.45dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +16.45dB Ês2 / Noc: +13dB
6.1.2.1 NR SA FR1 – E-UTRA cell re-selection to higher priority E-UTRA	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: +12dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -4dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 1.6dB 1.6dB During T3: 0dB -2dB 1.6dB 0.4dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: 13.6dB During T3: Noc1: -98dBm/15kHz Noc2: -100dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: -3.6dB
6.1.2.2 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -4dB Ês2 / Noc2: +14dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz	During T1: -2dB 0dB 0.4dB 1.6dB During T2: 0dB 0dB	During T1: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -3.6dB Ês2 / Noc2: +15.6dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz

	Ês1 / Noc1: +12dB Ês2 / Noc2: +14dB	1.6dB 0dB	Ês1 / Noc1: +13.6dB Ês2 / Noc2: +14dB
6.1.2.3 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRAN for UE fulfilling low mobility relaxed measurement criterion	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -4dB Ês2 / Noc2: +14dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +12dB Ês2 / Noc2: +14dB	During T1: -2dB 0dB 0.4dB 1.6dB During T2: 0dB 0dB 1.6dB 0dB	During T1: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -3.6dB Ês2 / Noc2: +15.6dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +13.6dB Ês2 / Noc2: +14dB
6.1.2.4 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRAN for UE fulfilling not-at-cell edge relaxed measurement criterion	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -4dB Ês2 / Noc2: +14dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +12dB Ês2 / Noc2: +14dB	During T1: -2dB 0dB 0.4dB 1.6dB During T2: 0dB 0dB 1.6dB 0dB	During T1: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -3.6dB Ês2 / Noc2: +15.6dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +13.6dB Ês2 / Noc2: +14dB
6.1.2.5 NR SA FR1 – E-UTRA cell re-selection to lower priority E-UTRA for UE configured with highSpeedMeasFlag-r16	Same as 6.1.2.2	Same as 6.1.2.2	Same as 6.1.2.2
6.2.1 NR SA FR1 TA Validation for CG-SDT	During T1: Noc = -100 dBm/15kHz Es/Noc = 0 dB During T2: Noc = -100 dBm/15kHz Es/Noc = 12dB During T3: Noc = -100 dBm/15kHz Es/Noc = 0dB During T4: Noc = -100 dBm/15kHz Es/Noc = 14dB During T5: Noc = -100 dBm/15kHz Es/Noc = 14dB During T6: Noc = -100 dBm/15kHz Es/Noc = 0dB In Signaling cg-SDT-RSRP-ChangeThreshold = 8dB cg-SDT-RSRP-ThresholdSSB = -110 dBm/SCS	During T1: 0 dB 0 dB During T2: 0 dB 0 dB During T3: 0 dB 0 dB During T4: 0 dB 0 dB During T5: 0 dB 0 dB During T6: 0 dB 0.25 dB for Config 1,2,4 0 dB for Config 3 In Signaling 0 dB 0 dB	During T1: Noc = -100 dBm/15kHz Es/Noc = 0 dB During T2: Noc = -100 dBm/15kHz Es/Noc = 12 dB During T3: Noc = -100 dBm/15kHz Es/Noc = 0 dB During T4: Noc = -100 dBm/15kHz Es/Noc = 14 dB During T5: Noc = -100 dBm/15kHz Es/Noc = 14 dB During T6: Noc = -100 dBm/15kHz Es/Noc = 0.25 dB for Config 1,2,4 Es/Noc = 0 dB for Config 3 In Signaling cg-SDT-RSRP-ChangeThreshold = 8dB cg-SDT-RSRP-ThresholdSSB = -110 dBm/SCS
6.3.1.1 NR SA FR1 handover with known target cell	TEST CONFIGURATION 1, 2 A3-Offset: 0dB	-1dB	A3-Offset: -1dB
	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity	During T1: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity

	During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +11dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +11dB	During T2: 0dB 0dB 0dB -1dB During T3: 0dB 0dB 0dB -1dB	During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +10dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +10dB
	TEST CONFIGURATION 3 A3-Offset: 0dB	 -1dB	 A3-Offset: -1dB
	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +11dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +11dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB -1dB During T3: 0dB 0dB 0dB -1dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +10dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +10dB
6.3.1.2 NR SA FR1 handover with unknown target cell	 During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB	 During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	 During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB
6.3.1.3 NR SA FR1-FR1 Handover with unknown Target Cell	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +5dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +5dB
6.3.1.4 NR SA FR1 – E-UTRA handover with known target cell	During T1: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +12dB Ês2 / Noc2: -infinity During T2: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -4dB Ês2 / Noc2: +8dB During T3: Noc1: -100dBm/15kHz	During T1: 0dB 0dB 1.55dB 0dB During T2: 0dB 0dB -1.55dB 1.55dB During T3: 0dB	During T1: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +13.55dB Ês2 / Noc2: -infinity During T2: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -5.55dB Ês2 / Noc2: +9.55dB During T3: Noc1: -100dBm/15kHz

	Noc2: -98dBm/15kHz Ês1 / Noc1: -4dB Ês2 / Noc2: +8dB	0dB -1.55dB 1.55dB	Noc2: -98dBm/15kHz Ês1 / Noc1: -5.55dB Ês2 / Noc2: +9.55dB
6.3.1.5 NR SA FR1 – E-UTRA handover with unknown target cell	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +7dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +7dB
6.3.1.6 NR SA FR1 – UTRAN FDD handover with known target cell	During T1: Noc: -100dBm/15kHz Ês / Noc: 12dB Ioc: -70dBm/3.84MHz Îor / Ioc: -infinity CPICH Ec / Ior: -10dB SCH Ec / Ior: -12dB During T2: Noc: -100dBm/15kHz Ês / Noc: -4dB Ioc: -70dBm/3.84MHz Îor / Ioc: -infinity CPICH Ec / Ior: -10dB SCH Ec / Ior: -12dB During T3: Noc: -100dBm/15kHz Ês / Noc: -4dB Ioc: -70dBm/3.84MHz Îor / Ioc: -infinity CPICH Ec / Ior: -10dB SCH Ec / Ior: -12dB	During T1: -1.54dB 0dB 0dB 0dB 0dB 0dB During T2: -1.54dB 0dB 0dB 0dB 0dB 0dB During T3: -1.54dB 0dB 0dB 0dB 0dB 0dB	During T1: Noc: -101.54dBm/15kHz Ês / Noc: 12dB Ioc: -70dBm/3.84MHz Îor / Ioc: -infinity CPICH Ec / Ior: -10dB SCH Ec / Ior: -12dB During T2: Noc: -101.54dBm/15kHz Ês / Noc: -4dB Ioc: -70dBm/3.84MHz Îor / Ioc: -infinity CPICH Ec / Ior: -10dB SCH Ec / Ior: -12dB During T3: Noc: -101.54dBm/15kHz Ês / Noc: -4dB Ioc: -70dBm/3.84MHz Îor / Ioc: -infinity CPICH Ec / Ior: -10dB SCH Ec / Ior: -12dB
6.3.1.7 NR SA FR1 synchronous DAPS handover	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +9dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +9dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +9dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +9dB In signaling: A3-offset: 0dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 1dB During T3: 0dB 0dB 1dB During T4: 0dB 0dB 1dB During T5: 0dB 0dB 1dB In signaling: -1dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +10dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +10dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +10dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +10dB In signaling: A3-offset: -1dB
6.3.1.8 NR SA FR1 asynchronous DAPS handover	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity	During T1: 0dB 0dB 0dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity

	During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +9dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +9dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +9dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +9dB In signaling: A3-offset: 0dB	During T2: 0dB 0dB 1dB During T3: 0dB 0dB 1dB During T4: 0dB 0dB 1dB During T5: 0dB 0dB 1dB In signaling: -1dB	During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +10dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +10dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +10dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +10dB In signaling: A3-offset: -1dB
6.3.1.9 NR SA FR1 Intra-band inter-frequency synchronous DAPS handover	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +8dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +8dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +8dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +8dB In signaling: A3-offset: 0dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 3.7dB During T3: 0dB 0dB 3.7dB During T4: 0dB 0dB 3.7dB During T5: 0dB 0dB 3.7dB In signaling: -3dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +11.7dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +11.7dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +11.7dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +11.7dB In signaling: A3-offset: -3dB
6.3.1.10 NR SA FR1 Intra-band inter-frequency asynchronous DAPS handover	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +8dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +8dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +8dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 3.7dB During T3: 0dB 0dB 3.7dB During T4: 0dB 0dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +11.7dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +11.7dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +8dB

	Ês2 / Noc: +8dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +8dB In signaling: A3-offset: 0dB	3.7dB During T5: 0dB 0dB 3.7dB In signaling: -3dB	Ês2 / Noc: +11.7dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +11.7dB In signaling: A3-offset: -3dB
6.3.1.11 NR SA FR1 Inter-band inter-frequency synchronous DAPS handover	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB In signaling: A3-offset: -6dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB During T3: 0dB 0dB 0dB During T4: 0dB 0dB 0dB During T5: 0dB 0dB 0dB In signaling: -1dB for config 1,2,4,5,9 In signaling: -4dB for config 3,6 In signaling: 2dB for config 7,8	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB In signaling: -7dB for config 1,2,4,5,9 In signaling: -10dB for config 3,6 In signaling: -4dB for config 7,8
6.3.1.12 NR SA FR1 Inter-band inter-frequency asynchronous DAPS handover	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB During T3: 0dB 0dB 0dB During T4: 0dB 0dB 0dB During T5: 0dB 0dB 0dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T4: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB During T5: Noc: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB

	In signaling: A3-offset: -4dB	In signaling: -3dB for config 1,2,4,5,9 In signaling: -6dB for config 3,6 In signaling: 0dB for config 7,8	In signaling: -7dB for config 1,2,4,5,9 In signaling: -10dB for config 3,6 In signaling: -4dB for config 7,8
6.3.1.18 NR SA FR1 Intra-frequency handover for unknown target cell operating with 12 PRB SSB bandwidth	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB
6.3.2.1.1 NR SA FR1 RRC re-establishment	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +7dB Ês2 / Noc: +4dB During T2: Noc: -98dBm/15kHz Ês1 / Noc: -infinity Ês2 / Noc: +4dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: -infinity Ês2 / Noc: +4dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB During T3: 0dB 0dB 0dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +7dB Ês2 / Noc: +4dB During T2: Noc: -98dBm/15kHz Ês1 / Noc: -infinity Ês2 / Noc: +4dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: -infinity Ês2 / Noc: +4dB
6.3.2.1.2 NR SA FR1 - FR1 RRC re-establishment	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: +7dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: +7dB
6.3.2.1.3 NR SA FR1 RRC re-establishment without serving cell timing	During T1: Noc: -98dBm/15kHz $Ês_1$ / Noc: +4dB $Ês_2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $Ês_1$ / Noc: -infinity $Ês_2$ / Noc: -infinity During T3: Noc: -98dBm/15kHz $Ês_1$ / Noc: -infinity $Ês_2$ / Noc: +4dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB During T3: 0dB 0dB 0dB	During T1: Noc: -98dBm/15kHz $Ês_1$ / Noc: +4dB $Ês_2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $Ês_1$ / Noc: -infinity $Ês_2$ / Noc: -infinity During T3: Noc: -98dBm/15kHz $Ês_1$ / Noc: -infinity $Ês_2$ / Noc: +4dB
6.3.2.2.1	Absolute uplink power: Normal conditions ±17dB	2.1dB	Absolute uplink power: Normal conditions ±19.1dB

	Relative uplink power step: Normal conditions ±2.5dB Uplink timing: 15kHz SCS T_e ±12*64*T_c 30kHz SCS T_e ±8*64*T_c	 0.7dB 112T_c 112T_c	Relative uplink power step: Normal conditions ±3.2dB Uplink timing: 15kHz SCS T_e ±880*T_c 30kHz SCS T_e ±624*T_c
6.3.2.2.2	Same as 6.3.2.2.1	Same as 6.3.2.2.1	Same as 6.3.2.2.1
6.3.2.2.3	Same as 6.3.2.2.1	Same as 6.3.2.2.1	Same as 6.3.2.2.1
6.3.2.2.4	Same as 6.3.2.2.1	Same as 6.3.2.2.1	Same as 6.3.2.2.1
6.3.2.3.1 NR SA FR1 RRC connection release with redirection	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +4dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +4dB
6.3.2.3.2 NR SA FR1 – E-UTRA RRC connection release with redirection	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +4dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +4dB
6.3.2.4.1 PDCCH-order RACH on neighbor cell in FR1 when RACH BW is within active UL BWP	Noc: -98dBm/SCS $Ês_0$ / Noc: +8dB $Ês_1$ / Noc: +8dB In signaling: A3-offset: -6dB PRACH Timing: ±12*64 Tc for 15 KHz SSB SCS,15 kHz UL SCS ±8*64 Tc for 30 KHz SSB SCS,30 kHz UL SCS	0dB 0dB 0dB In signaling: 0dB PRACH Timing: ±112Tc ±112Tc	Noc: -98dBm/SCS $Ês_0$ / Noc: +8dB $Ês_1$ / Noc: +8dB In signaling: A3-offset: -6dB PRACH Timing: ±880 Tc for 15 KHz SSB SCS,15 kHz UL SCS ±624 Tc for 30 KHz SSB SCS,30 kHz UL SCS
6.3.2.4.2 PDCCH-ordered RACH to an inter-frequency candidate cell in FR1 for LTM	Noc: -98dBm/SCS $Ês_0$ / Noc: +8dB $Ês_1$ / Noc: +4dB In signaling: A3-offset: -6dB PRACH Timing: ±12*64 Tc for 15 KHz SSB SCS,15 kHz UL SCS ±8*64 Tc for 30 KHz SSB SCS,30 kHz UL SCS	0dB 0dB 0dB In signaling: -5dB PRACH Timing: ±112Tc ±112Tc	Noc: -98dBm/SCS $Ês_0$ / Noc: +8dB $Ês_1$ / Noc: +4dB In signaling: A3-offset: -11dB PRACH Timing: ±880 Tc for 15 KHz SSB SCS,15 kHz UL SCS ±624 Tc for 30 KHz SSB SCS,30 kHz UL SCS
6.3.2.4.3 PDCCH-order RACH on neighbour cell without L1-RSRP measurement in FR1 when RACH BW is within active UL BWP	Same as 6.3.2.4.1	Same as 6.3.2.4.1	Same as 6.3.2.4.1
6.3.3.1 NR SA FR1 conditional handover	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB

	Ês2 / Noc: +11dB In signaling: A3-offset: 0dB	-1dB In signaling: -1dB	Ês2 / Noc: +10dB In signaling: A3-offset: -1dB
6.3.3.2 NR SA FR1-FR1 conditional handover	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +5dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 1.7dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +6.7dB
6.3.3.6 NR SA FR1 Intra-frequency NES triggering conditional handover	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +11dB In signalling: A3-offset: 0dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB -1dB In signalling: -1dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +10dB In signalling: A3-offset: -1dB
6.3.3.7 NR SA FR1-FR1 Inter-frequency NES-based conditional handover	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +5dB In signalling: A3-offset for CHO: 6dB A3-offset for NES CHO: -4dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 1.7dB In signalling: CHO: 4dB NES CHO: 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +6.7dB In signalling: A3-offset for CHO: 10dB A3-offset for NES CHO: -4dB
6.3.4.1 RACH-based Intra-frequency PCell switch from FR1 to FR1	During T1~T4: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB In signaling: A3-offset = -6dB	During T1~T4: 0dB 0dB 0dB 0dB In signaling: 0 dB	During T1~T4: 0dB 0dB +8dB +8dB In signaling: A3-offset = -6dB
6.3.4.2 RACH-based Inter-frequency PCell switch from FR1 to FR1	During T1~T4: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB In signaling: A3-offset = -6dB	During T1~T4: 0dB 0dB 0dB 0dB In signaling: -1 dB	During T1~T4: 0dB 0dB +8dB +8dB In signaling: A3-offset = -7dB
6.3.4.3 RACH-less Intra-frequency PCell switch from FR1 to FR1	During T1~T5: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +8dB In signaling: A3-offset: -6dB	During T1~T5: 0dB 0dB 0dB In signaling: 0dB	During T1~T5: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +8dB In signaling: A3-offset: -6dB
6.3.4.4 NR SA FR1 RACH-less Intra-frequency PCell switch from	Same as 6.3.4.3	Same as 6.3.4.3	Same as 6.3.4.3

FR1 to FR1 without L1-RSRP measurement			
6.4.1.1 EN-DC FR1 UE transmit timing accuracy	Test 1 (no DRX): Uplink timing: ±12*64 T_c for 15 KHz SSB SCS,15 kHz UL SCS ±10*64 T_c for 15 KHz SSB SCS,30 kHz UL SCS ±10*64 T_c for 15 KHz SSB SCS,60 kHz UL SCS ±8*64 T_c for 30 KHz SSB SCS,15 kHz UL SCS ±8*64 T_c for 30 KHz SSB SCS,30 kHz UL SCS ±7*64 T_c for 30 KHz SSB SCS,60 kHz UL SCS Max step size T_q: 5.5*64*T_c Min adjust rate T_p: 5.5*64*T_c Max adjust rate: 5.5*64*T_c $\hat{E}s_2$ / N_{oc}: +3.00dB N_{oc} = -98 dBm/15 kHz (Config 1,2,3) Test 2 (with DRX): ±12*64 T_c for 15 KHz SSB SCS,15 kHz UL SCS ±10*64 T_c for 15 KHz SSB SCS,30 kHz UL SCS ±10*64 T_c for 15 KHz SSB SCS,60 kHz UL SCS ±8*64 T_c for 30 KHz SSB SCS,15 kHz UL SCS ±8*64 T_c for 30 KHz SSB SCS,30 kHz UL SCS ±7*64 T_c for 30 KHz SSB SCS,60 kHz UL SCS $\hat{E}s_1$ / N_{oc}: +3.00dB	 ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c +0.5*64T_c -3.6*64*T_c +1.1*64*T_c +0.3 dB +1.5 dB ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c ±1.75*64*T_c +0.3dB	Test 1 (10MHz Ch BW): Uplink timing: ±13.75*64*T_c Uplink timing: ±11.75*64*T_c Uplink timing: ±11.75*64*T_c Uplink timing: ±9.75*64*T_c Uplink timing: ±9.75*64*T_c Uplink timing: ±8.75*64*T_c Max step size T_q: 6.0*64*T_c Min adjust rate: 1.9*64*T_c Max adjust rate: 6.6*64*T_c $\hat{E}s_1$ / N_{oc}: +3.30dB N_{oc} = -98 dBm/15 kHz (Config 1,2,3) +1.5 dB Test 2 (with DRX): Uplink timing: ±13.75*64*T_c Uplink timing: ±11.75*64*T_c Uplink timing: ±11.75*64*T_c Uplink timing: ±9.75*64*T_c Uplink timing: ±9.75*64*T_c Uplink timing: ±8.75*64*T_c $\hat{E}s_1$ / N_{oc}: +3.30dB
6.4.3.1 NR SA FR1 timing advance adjustment accuracy	N_{oc} = -98 dBm/15 kHz (Config 1, 2, 4, 5) N_{oc} = -95 dBm/15 kHz (Config 3, 6) $\hat{E}s_x$ / N_{oc} = 3 dB UE Timing Advance Adjustment Accuracy for 15kHz SCS = ±256 T_c+ TT UE Timing Advance Adjustment Accuracy for 30kHz SCS = ±256 T_c+ TT	0 0 0 +/- 88 Tc +/- 88 Tc	N_{oc} = -98 dBm/15 kHz (Config 1, 2) N_{oc} = -95 dBm/15 kHz (Config 3) $\hat{E}s_x$ / N_{oc} = 3 dB UE TAAA for 15kHz SCS = ±344 T_c UE TAAA for 30kHz SCS = ±344 T_c
6.5.1.1 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode	SNR during T1: 1dB T2: -7dB T3: -15dB	Offset during T1: +0.8dB T2: +0.8dB T3: -0.8dB	SNR during T1: 1.8dB T2: -6.2dB T3: -15.8dB
6.5.1.2 NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode	SNR during T1: 1dB T2: -7dB T3: -15dB T4: -4.5dB T5: 1dB	Offset during T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: +0.8dB	SNR during T1: 1.8dB T2: -6.2dB T3: -15.8dB T4: -5.3dB T5: 1.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause D.4.1.1
6.5.1.3 NR SA FR1 radio link monitoring out-of-sync test for	Same as 6.5.1.1	Same as 6.5.1.1	Same as 6.5.1.1

PCell configured with SSB-based RLM RS in DRX mode			
6.5.1.4 NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in DRX mode	Same as 6.5.1.2	Same as 6.5.1.2	Same as 6.5.1.2
6.5.1.5 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode	Same as 6.5.1.1	Same as 6.5.1.1	Same as 6.5.1.1
6.5.1.6 NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in non-DRX mode	Same as 6.5.1.2	Same as 6.5.1.2	Same as 6.5.1.2
6.5.1.7 NR SA FR1 radio link monitoring out-of-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode	Same as 6.5.1.1	Same as 6.5.1.1	Same as 6.5.1.1
6.5.1.8 NR SA FR1 radio link monitoring in-sync test for PCell configured with CSI-RS-based RLM RS in DRX mode	Same as 6.5.1.2	Same as 6.5.1.2	Same as 6.5.1.2
6.5.1.9 SA FR1 radio link monitoring out-of-sync Test for PSCell configured with CSI-RS-based RLM for UE fulfilling relaxed measurement criterion	SNR during T1: 1dB T2: 1dB T3: -15dB	Offset during T1: +0.8dB T2: +0.8dB T3: -0.8dB	SNR during T1: 1.8dB T2: 1.8dB T3: -15.8dB
6.5.2.1 NR SA FR1 interruptions during measurements on deactivated NR SCC	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB	During T1: 0dB 0dB 0dB 0dB	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB
6.5.2.2	Same as 6.5.2.1	Same as 6.5.2.1	Same as 6.5.2.1
6.5.3.1 NR SA FR1 SCell activation and deactivation of known SCell in non-DRX for 160ms SCell measurement cycle	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB During T3: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB During T3: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB
6.5.3.2 NR SA FR1 SCell activation and deactivation of known SCell in non-DRX for 640ms SCell measurement cycle	Same as 6.5.3.1	Same as 6.5.3.1	Same as 6.5.3.1
6.5.3.3 NR SA FR1 SCell activation and deactivation of unknown SCell in non-DRX	Same as 6.5.3.1	Same as 6.5.3.1	Same as 6.5.3.1
6.5.3.4 NR SA FR1 direct SCell activation at SCell addition of known SCell	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB

6.5.3.5 NR SA FR1 direct SCell activation at handover with known SCell	During T1: Noc1: -98 dBm/15 kHz Noc2: -98 dBm/15 kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB Ês3 / Noc1: +8dB During T2: Noc1: -98 dBm/15 kHz Noc2: -98 dBm/15 kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB Ês3 / Noc1: +8dB During T3: Noc1: -98 dBm/15 kHz Noc2: -98 dBm/15 kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB Ês3 / Noc1: +8dB In signaling: A3-offset = -15dB	During T1: 0dB 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB 0dB In signaling: 0dB	During T1: Noc1: -98 dBm/15 kHz Noc2: -98 dBm/15 kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB Ês3 / Noc1: +8dB During T2: Noc1: -98 dBm/15 kHz Noc2: -98 dBm/15 kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB Ês3 / Noc1: +8dB During T3: Noc1: -98 dBm/15 kHz Noc2: -98 dBm/15 kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +8dB Ês3 / Noc1: +8dB In signaling: A3-offset = -15dB
6.5.3.10 NR SA FR1 fast SCell Activation of known SCell in non-DRX for 160ms SCell measurement cycle	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $Ês_1$ / Noc_1: +17dB $Ês_2$ / Noc_2: +17dB During T2: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $Ês_1$ / Noc_1: +17dB $Ês_2$ / Noc_2: +17dB In signaling: A3-offset = -15dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB In signaling: 0 dB	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $Ês_1$ / Noc_1: +17dB $Ês_2$ / Noc_2: +17dB During T2: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $Ês_1$ / Noc_1: +17dB $Ês_2$ / Noc_2: +17dB In signaling: A3-offset = -15dB
6.5.3.11 NR SA FR1 fast SCell Activation of known SCell in non-DRX for 640 ms SCell measurement cycle	Same as 6.5.3.10	Same as 6.5.3.10	Same as 6.5.3.10
6.5.3.16 NR SA FR1 Inter-band SSB-less SCell Activation based on A-TRS in non-DRX	Test Config 1, 2: During T1: Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc1: +10dB Ês2 / Noc2: +22dB During T2: Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc1: +10dB Ês2 / Noc2: +22dB Test Config 3: During T1: Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc1: +10dB Ês2 / Noc2: +22dB During T2: Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc1: +10dB Ês2 / Noc2: +22dB	Test Config 1, 2: During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB Test Config 3: During T1: 0dB 0dB 0dB -4dB During T2: 0dB 0dB 0dB -4dB	Test Config 1,2: During T1: Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc1: +10dB Ês2 / Noc2: +22dB During T2: Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc1: +10dB Ês2 / Noc2: +22dB Test Config 3: During T1: Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc1: +10dB Ês2 / Noc2: +18dB During T2: Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc1: +10dB Ês2 / Noc2: +18dB
6.5.5.1 NR SA FR1 SSB-based beam failure detection and link recovery in non-DRX	q0 SSB SNR during: T1: 5dB T2: -3dB	Offset during: T1: +0.8dB T2: +0.8dB	SNR during: T1: +5.8dB T2: -2.2dB

	T3: -12dB T4: -12dB T5: -12dB q1 SSB during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 SSB during T2: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 SSB during T3, T4 and T5: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +10dB	T3: -0.8dB T4: -0.8dB T5: -0.8dB q1 SSB during T1: 0dB -0.2dB q1 SSB during T2: 0dB -0.2dB q1 SSB during T3, T4 and T5: 0dB +0.2dB	T3: -12.8dB T4: -12.8dB T5: -12.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3, T4 and T5 is modified as specified in clause D.4.1.1 q1 SSB during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10.2dB q1 SSB during T2: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10.2dB q1 SSB during T3, T4 and T5: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +10.2dB
6.5.5.2 NR SA FR1 SSB-based beam failure detection and link recovery in DRX	Same as 6.5.5.1	Same as 6.5.5.1	Same as 6.5.5.1
6.5.5.3 NR SA FR1 CSI-RS-based beam failure detection and link recovery in non-DRX	q0 CSI-RS SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB q1 CSI-RS during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 CSI-RS during T2: Noc_2: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 CSI-RS during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +10dB	Offset during: T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: -0.8dB q1 CSI-RS during T1: 0dB -0.2dB q1 CSI-RS during T2: 0dB -0.2dB q1 CSI-RS during T3, T4 and T5: 0dB +0.2dB	SNR during: T1: +5.8dB T2: -2.2dB T3: -12.8dB T4: -12.8dB T5: -12.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3, T4 and T5 is modified as specified in clause D.4.1.1 q1 CSI-RS during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10.2dB q1 CSI-RS during T2: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10.2dB q1 CSI-RS during T3, T4 and T5: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +10.2dB
6.5.5.4 NR SA FR1 CSI-RS-based beam failure detection and link recovery in DRX	Same as 6.5.5.3	Same as 6.5.5.3	Same as 6.5.5.3
6.5.5.5 NR SA FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX	On the SCell: q0 CSI-RS SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB q1 SSB during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB	On the SCell: Offset during: T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: -0.8dB q1 SSB during T1: 0dB -0.2dB	On the SCell: T1: +5.8dB T2: -2.2dB T3: -12.8dB T4: -12.8dB T5: -12.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3, T4 and T5 is modified as specified in clause D.4.1.1 q1 SSB during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10.2dB

	q1 SSB during T2: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: -10dB q1 SSB during T3, T4 and T5: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +10dB	q1 SSB during T2: 0dB -0.2dB q1 SSB during T3, T4 and T5: 0dB +0.2dB	q1 SSB during T2: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: -10.2dB q1 SSB during T3, T4 and T5: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +10.2dB
6.5.5.6 NR SA FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in DRX	Same as 6.5.5.5	Same as 6.5.5.5	Same as 6.5.5.5
6.5.5.7 NR SA FR1 PCell TRP Specific CSI-RS-based Beam Failure Detection and Link Recovery in DRX	q0,0 CSI-RS SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB q0,1 CSI-RS SNR during: T1-T5: 5dB q1,0 CSI-RS during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: -10dB q1,0 CSI-RS during T2: Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: -10dB q1,0 CSI-RS during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +10dB	q0,0 Offset during: T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: -0.8dB q0,1 Offset during: T1-T5: +0.8dB q1,0 CSI-RS during T1: 0dB -0.2dB q1,0 CSI-RS during T2: 0dB -0.2dB q1,0 CSI-RS during T3, T4 and T5: 0dB +0.2dB	q0,0 SNR during: T1: +5.8dB T2: -2.2dB T3: -12.8dB T4: -12.8dB T5: -12.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3, T4 and T5 is modified as specified in clause D.4.1.1 q0,1 SNR during: T1-T5: +5.8dB q1,0 CSI-RS during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: -10.2dB q1,0 CSI-RS during T2: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: -10.2dB q1,0 CSI-RS during T3, T4 and T5: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +10.2dB
6.5.6.1.1 NR SA FR1-FR1 DCI-based DL active BWP switch in non-DRX	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB During T3: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB	During T1: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB During T3: Noc_1: -104dBm/15kHz Noc_2: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB $\hat{E}s_2$ / Noc_2: +17dB
6.5.6.1.2 NR SA FR1 DCI-based DL active BWP switch in non-DRX	During T1: Noc_1: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB During T2: Noc_1: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB	During T1: 0dB 0dB During T2: 0dB 0dB	During T1: Noc_1: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB During T2: Noc_1: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB

	During T3: Noc_1: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB	During T3: 0dB 0dB	During T3: Noc_1: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB
6.5.6.2.1 NR SA FR1 RRC-based DL active BWP switch in non-DRX	During T1: Noc_1: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB	During T1: 0dB 0dB	During T1: Noc_1: -104dBm/15kHz $\hat{E}s_1$ / Noc_1: +17dB
6.5.7.1 NR SA FR1 DL Interruptions at switching between two uplink carriers in FDD-TDD CA	Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc: +17dB Ês2 / Noc: +14dB Reported CSI-RSRP values ± 10dB	0dB 0dB 0dB 0dB Via mapping	Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc: +17dB Ês2 / Noc: +14dB CSI-RS#0: RSRP_65 to RSRP_86
6.5.7.2 NR SA FR1 DL Interruptions at switching between two uplink carriers in TDD-TDD CA	Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc: +14dB Ês2 / Noc: +14dB Reported CSI-RSRP values ± 10dB	0dB 0dB 0dB 0dB Via mapping	Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc: +14dB Ês2 / Noc: +14dB CSI-RS#0: RSRP_65 to RSRP_86
6.5.7A.1 NR SA FR1 DL interruptions at switching between two uplink carriers in FDD-TDD CA	Same as 6.5.7.1	Same as 6.5.7.1	Same as 6.5.7.1
6.5.7A.2 NR SA FR1 DL interruptions at switching between two uplink carriers in TDD-TDD CA	Same as 6.5.7.2	Same as 6.5.7.2	Same as 6.5.7.2
6.5.7B.1 NR SA FR1 DL interruptions at switching between two uplink bands in FDD-TDD CA	Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc: +17dB Ês2 / Noc: +14dB Ês3 / Noc: +14dB Reported CSI-RSRP values ± 10dB	0dB 0dB 0dB 0dB 0dB 0dB Via mapping	Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês1 / Noc: +17dB Ês2 / Noc: +14dB Ês3 / Noc: +14dB CSI-RS#0: RSRP 65 to RSRP_86
6.5.7B.2 NR SA FR1 DL interruptions at switching between two uplink bands in TDD-TDD CA	Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc: +14dB Ês2 / Noc: +14dB Ês3 / Noc: +14dB Reported CSI-RSRP values ± 10dB	0dB 0dB 0dB 0dB 0dB 0dB Via mapping	Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Ês1 / Noc: +14dB Ês2 / Noc: +14dB Ês3 / Noc: +14dB CSI-RS#0: RSRP_65 to RSRP_86
6.5.7C.1 NR SA FR1 DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA	Same as 6.5.7B.1	Same as 6.5.7B.1	Same as 6.5.7B.1
6.5.7C.2 NR SA FR1 DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA	Same as 6.5.7B.2	Same as 6.5.7B.2	Same as 6.5.7B.2
6.5.7D.1 NR SA FR1 DL interruptions at switching across three uplink bands in TDD-TDD CA for single TAG	Same as 6.5.7B.1	Same as 6.5.7B.1	Same as 6.5.7B.1
6.5.7D.2 NR SA FR1 DL interruptions at switching across four uplink bands in FDD-TDD CA for single TAG	Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Noc4: -104dBm/15kHz Ês1 / Noc: +17dB	0dB 0dB 0dB 0dB 0dB	Noc1: -104dBm/15kHz Noc2: -104dBm/15kHz Noc3: -104dBm/15kHz Noc4: -104dBm/15kHz Ês1 / Noc: +17dB

	Ês2 / Noc: +17dB Ês3 / Noc: +14dB Ês3 / Noc: +14dB Reported CSI-RSRP values ± 10dB	0dB 0dB 0dB Via mapping	Ês2 / Noc: +17dB Ês3 / Noc: +14dB Ês3 / Noc: +14dB CSI-RS#0: RSRP_65 to RSRP_86
6.5.7D.3 NR SA FR1 DL interruptions at switching across three uplink bands in FDD-TDD CA for two TAGs	Same as 6.5.7B.1	Same as 6.5.7B.1	Same as 6.5.7B.1
6.5.7D.4 NR SA FR1 DL interruptions at switching across four uplink bands in TDD-TDD CA for two TAGs	Same as 6.5.7D.2	Same as 6.5.7D.2	Same as 6.5.7D.2
6.5.8.1 UE specific CBW change on PCell in FR1 in non-DRX	During T1: Noc1: -104dBm/15kHz Ês1 / Noc1: +17dB	During T1: 0dB 0dB	During T1: Noc1: -104dBm/15kHz Ês1 / Noc1: +17dB
6.6.1.1 SA event triggered reporting tests without gap under non-DRX	During T1: Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB	During T1: Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB
6.6.1.2 SA event triggered reporting tests without gap under DRX	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.3 SA event triggered reporting tests with per-UE gaps under non-DRX	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.4 SA event triggered reporting tests with per-UE gaps under DRX	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.5 SA event triggered reporting tests without gap under non-DRX with SSB index reading	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.6 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.7 NR SA FR1 event-triggered reporting without gap in DRX for UE configured with highSpeedMeasFlag-r16	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
6.6.1.8 NR SA FR1 event triggered reporting without gap in DRX for UE configured with highSpeedMeasCA-Scell-r17	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB $Ês_3$ / Noc: -infinity During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB	During T1: 0dB 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB $Ês_3$ / Noc: -infinity During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB $Ês_2$ / Noc: +4.00dB
6.6.1.13 NR SA FR1 event triggered reporting tests without gap in DRX under Cell DTX	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
6.6.2.1 NR SA FR1-FR1 event-triggered reporting in non-DRX	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: -infinity	During T1: 0dB 0dB 0dB 0dB	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $Ês_1$ / Noc: +4.00dB $Ês_2$ / Noc: -infinity

	During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: +7.00dB	During T2: 0dB 0dB 0dB 0dB	During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: +7.00dB
6.6.2.2 NR SA FR1-FR1 event-triggered reporting in DRX	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
6.6.2.5 NR SA FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
6.6.2.6 NR SA FR1-FR1 event-triggered reporting in DRX with SSB time index detection	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
6.6.2.9	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
6.6.2.10	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
6.6.2.11	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
6.6.2.12 NR SA FR1-FR1 event triggered reporting tests without SSB time index detection in DRX for UE configured with highSpeedMeasInterFreq-r17	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
6.6.3.1 NR SA FR1 – E-UTRAN event-triggered reporting in non-DRX	During T1: Freq 1 Noc: -104dBm/15kHz Freq 2 Noc: -104dBm/15kHz Ês1 / Noc: +16.00dB Ês2 / Noc: -infinity During T2: Freq 1 Noc: -104dBm/15kHz Freq 2 Noc: -104dBm/15kHz Ês1 / Noc: 0dB Ês2 / Noc: +17.00dB	During T1: 0dB 0dB +1.55dB 0dB During T2: 0dB 0dB -1.55dB +1.55dB	During T1: Freq 1 Noc: -104dBm/15kHz Freq 2 Noc: -104dBm/15kHz Ês1 / Noc: +17.55dB Ês2 / Noc: -infinity During T2: Freq 1 Noc: -104+TTdBm/15kHz Freq 2 Noc: -104+TTdBm/15kHz Ês1 / Noc: -1.55dB Ês2 / Noc: +18.55dB
6.6.3.2 NR SA FR1 – E-UTRAN event-triggered reporting in DRX	Same as 6.6.3.1	Same as 6.6.3.1	Same as 6.6.3.1
6.6.3.3 NR SA FR1 – E-UTRAN event-triggered reporting in DRX for UE configured with highSpeedMeasFlag-r16	During T1: Freq 1 Noc: -106dBm/15kHz Freq 2 Noc: -106dBm/15kHz Ês1 / Noc: +18.00dB Ês2 / Noc: -infinity During T2: Freq 1 Noc: -106dBm/15kHz Freq 2 Noc: -106dBm/15kHz Ês1 / Noc: -2dB Ês2 / Noc: +19.00dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Freq 1 Noc: -106dBm/15kHz Freq 2 Noc: -106dBm/15kHz Ês1 / Noc: +18.00dB Ês2 / Noc: -infinity During T2: Freq 1 Noc: -106dBm/15kHz Freq 2 Noc: -106dBm/15kHz Ês1 / Noc: -2dB Ês2 / Noc: +19.00dB
6.6.4.1 NR SA FR1 SSB-based L1-RSRP measurement in non-DRX	During T1: Noc: -98dBm/15kHz $\hat{E}s_0$ / Noc: +0.00dB $\hat{E}s_1$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +3.00dB Reported SSB#0 SS-RSRP values ± 10dB Reported SSB#1 SS-RSRP values ± 10dB Reported Differential SS-RSRP values ± 3dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0.5dB Via mapping	During T1: Noc: -94.65dBm/15kHz $\hat{E}s_0$ / Noc: +0.00dB $\hat{E}s_1$ / Noc: -infinity During T2: Noc: -94.65dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +3.50dB **For configuration 1,2,4,5** SSB#1: RSRP_55 to RSRP_75 SSB#0: DIFFRSRP_0 to DIFFRSRP_3 **For configuration 3,6** SSB#1: RSRP_58 to RSRP_78 SSB#0: DIFFRSRP_0 to DIFFRSRP_3
6.6.4.2 NR SA FR1 SSB-based L1-RSRP measurement in DRX	Same as 6.6.4.1	Same as 6.6.4.1	Same as 6.6.4.1

6.6.4.3 NR SA FR1 CSI-RS-based L1-RSRP measurement in non-DRX	Noc: -98dBm/15kHz $\hat{E}_{s0}$ / Noc: 0.00dB $\hat{E}_{s1}$ / Noc: +3.00dB Reported CSI-RSRP values ± 10dB Reported Differential CSI-RSRP values ± 3dB	0dB 0dB 0.5dB Via mapping	Noc: -94.65dBm/15kHz $\hat{E}_{s0}$ / Noc: 0.00dB $\hat{E}_{s1}$ / Noc: +3.50dB **For configuration 1,2,4,5** CSI-RS#1: RSRP_55 to RSRP_75 CSI-RS#0: DIFFRSRP_0 to DIFFRSRP_3 **For configuration 3,6** CSI-RS#1: RSRP_58 to RSRP_78 CSI-RS#0: DIFFRSRP_0 to DIFFRSRP_3
6.6.4.4 NR SA FR1 CSI-RS-based L1-RSRP measurement in DRX	Same as 6.6.4.3	Same as 6.6.4.3	Same as 6.6.4.3
6.6.4.5 NR SA FR1 SSB-based L1-RSRP measurement in DRX for UE configured with highSpeedMeasFlag-r16	Same as 6.6.4.1	Same as 6.6.4.1	Same as 6.6.4.1
6.6.4.6 NR SA FR1 Inter-cell SSB based L1-RSRP measurements on PCell in DRX	Same as 6.6.4.1	Same as 6.6.4.1	Same as 6.6.4.1
6.6.5.1 NR SA FR1 – UTRAN event-triggered reporting in non-DRX	During T1: Noc: -106dBm/15kHz Ês / Noc: 18dB Ioc: -70dBm/3.84MHz Îor / Ioc: -infinity CPICH Ec / Ior: -10dB SCH Ec / Ior: -12dB During T2: Noc: -106dBm/15kHz Ês / Noc: -2dB Ioc: -70dBm/3.84MHz Îor / Ioc: -1.8dB CPICH Ec / Ior: -10dB SCH Ec / Ior: -12dB	During T1: 0dB 0dB 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB 0dB	During T1: Noc: -106dBm/15kHz Ês / Noc: 18dB Ioc: -70dBm/3.84MHz Îor / Ioc: -infinity CPICH Ec / Ior: -10dB SCH Ec / Ior: -12dB During T2: Noc: -106dBm/15kHz Ês / Noc: -2dB Ioc: -70dBm/3.84MHz Îor / Ioc: -1.8dB CPICH Ec / Ior: -10dB SCH Ec / Ior: -12dB
6.6.6.1 NR SA FR1 SRS-RSRP measurement with non-DRX	Test Configuration 1: T1: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = -infinity dB T2: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = +4dB Test Configuration 2: T1: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = -infinity dB T2: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = +4dB	Test Config 1: T1: 0dB 0dB T2: 0dB +5.25dB Test Config 2: T1: 0dB 0dB T2: 0dB +4.75dB	Test Configuration 1: T1: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = -infinity dB T2: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = +9.25dB Test Configuration 2: T1: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = -infinity dB T2: N_{oc} = -98dBm/15kHz $\hat{E}_s$ / N_{oc} = +8.75dB
6.6.8.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX	Noc: -94.65dBm/15kHz $\hat{E}_{s0}$ / Noc: 0.00dB $\hat{E}_{s1}$ / Noc: +3.00dB Reported CSI-SINR values ±5.5dB Reported Differential CSI-SINR values ±4.5dB	0dB 0dB 0dB Via mapping	Noc: -94.65dBm/15kHz $\hat{E}_{s0}$ / Noc: 0.00dB $\hat{E}_{s1}$ / Noc: +3.00dB **For configuration 1,2,3,4,5,6** CSI-RS#1: SINR_41 to SINR_64 CSI-RS#0: DIFFSINR_0 to DIFFSINR_7

6.6.8.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX	Noc: -94.65dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +3.00dB Reported SS-SINR values ±4dB Reported Differential SS-SINR values ±3dB	0dB 0.5dB 0dB Via mapping	Noc: -94.65dBm/15kHz $\hat{E}s_0$ / Noc: 0.50dB $\hat{E}s_1$ / Noc: +3.00dB **For configuration 1,2,3,4,5,6** SSB#1: SINR_44 to SINR_61 SSB#0: DIFFSINR_0 to DIFFSINR_5
6.6.8.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX	Noc: -94.65dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +3.00dB Reported CSI-SINR values ±4.5dB Reported Differential CSI-SINR values ±3.5dB	0dB 0dB 0dB Via mapping	Noc: -94.65dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +3.00dB **For configuration 1,2,3,4,5,6** CSI-RS#1: SINR_43 to SINR_62 CSI-RS#0: DIFFSINR_0 to DIFFSINR_6
6.6.9.1 NR SA FR1 Idle mode CA/DC measurement for FR1	During T1: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +7dB $\hat{E}s_2$ / Noc_2: -infinity During T2: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +7dB $\hat{E}s_2$ / Noc_2: 0dB During T3: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +7dB $\hat{E}s_2$ / Noc_2: 0dB Reported SS-RSRP and SS-RSRQ	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB Via mapping	During T1: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +7dB $\hat{E}s_2$ / Noc_2: -infinity During T2: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +7dB $\hat{E}s_2$ / Noc_2: 0dB During T3: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +7dB $\hat{E}s_2$ / Noc_2: 0dB **Configuration 1 and 2:** Cell 1: RSRP_54 to RSRP_77 RSRQ_55 to RSRQ_72 Cell 2: RSRP_47 to RSRP_70 RSRQ_51 to RSRQ_67 **Configuration 3:** Cell 1: RSRP_57 to RSRP_80 RSRQ_55 to RSRQ_72 Cell 2: RSRP_50 to RSRP_73 RSRQ_51 to RSRQ_67
6.6.15.1 NR SA FR1 Idle Mode measurements of inter-RAT CA candidate cells for early reporting	During T1: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +5dB $\hat{E}s_2$ / Noc_2: +5dB During T2: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +5dB $\hat{E}s_2$ / Noc_2: +5dB During T3: Noc_1: -98dBm/15kHz	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB	During T1: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +5dB $\hat{E}s_2$ / Noc_2: +5dB During T2: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +5dB $\hat{E}s_2$ / Noc_2: +5dB During T3: Noc_1: -98dBm/15kHz

	Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +5dB $\hat{E}s_2$ / Noc_2: -3dB During T4: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +5dB $\hat{E}s_2$ / Noc_2: +8dB During T5: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +5dB $\hat{E}s_2$ / Noc_2: +5dB Thresh_X_HighP 48dB Reported SS-RSRP and SS-RSRQ	0dB 0dB 0dB During T4: 0dB 0dB 0dB 0dB During T5: 0dB 0dB 0dB 0dB +4dB Via Mapping	Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +5dB $\hat{E}s_2$ / Noc_2: -3dB During T4: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +5dB $\hat{E}s_2$ / Noc_2: +8dB During T5: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +5dB $\hat{E}s_2$ / Noc_2: +5dB 52dB **Configuration 1 and 2:** Cell 1: RSRP_52 to RSRP_75 RSRQ_54 to RSRQ_71 Cell 2: RSRP_39 to RSRP_62 RSRQ_6 to RSRQ_27 **Configuration 3:** Cell 1: RSRP_55 to RSRP_78 RSRQ_54 to RSRQ_71 Cell 2: RSRP_39 to RSRP_62 RSRQ_6 to RSRQ_27
6.6.17.1 NR SA FR1 event triggered reporting tests with autonomous activation/deactivation Pre-MG	During T1, T2: Noc: -98dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: -infinity During T3: Noc: -98dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: +4.00dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB During T3: 0dB 0dB 0dB	During T1, T2: Noc: -98dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: -infinity During T3: Noc: -98dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: +4.00dB
6.6.17.2 NR SA FR1 event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation	Same as 6.6.17.1	Same as 6.6.17.1	Same as 6.6.17.1
6.6.18.1 NR SA FR1 event-triggered reporting for concurrent gaps non-overlap with SSB-based measurements in both inter-frequency layers	During T1: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz Freq 3 Noc_3: -98dBm/15kHz Freq 1 $\hat{E}s_1$ / Noc_1: +4.00dB Freq 2 $\hat{E}s_2$ / Noc_2: -infinity Freq 3 $\hat{E}s_3$ / Noc_3: -infinity During T2: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz Freq 3 Noc_3: -98dBm/15kHz Freq 1 $\hat{E}s_1$ / Noc_1: +4.00dB Freq 2 $\hat{E}s_2$ / Noc_2: +7.00dB	During T1: 0dB 0dB 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB	During T1: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz Freq 3 Noc_3: -98dBm/15kHz Freq 1 $\hat{E}s_1$ / Noc_1: +4.00dB Freq 2 $\hat{E}s_2$ / Noc_2: -infinity Freq 3 $\hat{E}s_3$ / Noc_3: -infinity During T2: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz Freq 3 Noc_3: -98dBm/15kHz Freq 1 $\hat{E}s_1$ / Noc_1: +4.00dB Freq 2 $\hat{E}s_2$ / Noc_2: +7.00dB

	Freq 3 $\hat{E}s_3$ / Noc_3: +7.00dB	0dB	Freq 3 $\hat{E}s_3$ / Noc_3: +7.00dB
6.6.18.2 NR SA FR1 event-triggered reporting for concurrent gaps partially-overlap with SSB-based measurements in both inter-frequency layers	Same as 6.6.18.1	Same as 6.6.18.1	Same as 6.6.18.1
6.6.18.3 NR SA FR1 NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -104dBm/15kHz $\hat{E}s1$ / Noc: +4.00dB $\hat{E}s2$ / Noc: -infinity $\hat{E}s3$ / Noc: -infinity During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -104dBm/15kHz $\hat{E}s1$ / Noc: +4.00dB $\hat{E}s2$ / Noc: +4.00dB $\hat{E}s3$ / Noc: +17.00dB In signaling: b2-Threshold2EUTRA: -95dB	During T1: 0dB 0dB 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB 0dB In signaling: -6dB	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -104dBm/15kHz $\hat{E}s1$ / Noc: +4.00dB $\hat{E}s2$ / Noc: -infinity $\hat{E}s3$ / Noc: -infinity During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -104dBm/15kHz $\hat{E}s1$ / Noc: +4.00dB $\hat{E}s2$ / Noc: +4.00dB $\hat{E}s3$ / Noc: +17.00dB In signaling: b2-Threshold2EUTRA: -101dB
6.6.18.4 NR SA FR1 event triggered reporting tests for PRS and SSB measurement in FR1 without SSB time index detection when DRX is not used	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz PRS $\hat{E}s1$ / Noc: -infinity PRS $\hat{E}s2$ / Noc: N/A PRS $\hat{E}s3$ / Noc: -infinity During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz PRS $\hat{E}s1$ / Noc: -3.00dB PRS $\hat{E}s2$ / Noc: N/A PRS $\hat{E}s3$ / Noc: -10.00dB In signaling: A3-Offset: -6dB	During T1: 0dB 0dB 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB 0dB In signaling: -9dB	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz PRS $\hat{E}s1$ / Noc: -infinity PRS $\hat{E}s2$ / Noc: N/A PRS $\hat{E}s3$ / Noc: -infinity During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz PRS $\hat{E}s1$ / Noc: -3.00dB PRS $\hat{E}s2$ / Noc: NA PRS $\hat{E}s3$ / Noc: -10.00dB In signaling: A3-Offset: -15dB
6.6.19.1 NR SA FR1 event-triggered reporting tests with NCSG under non-DRX in FR1	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
6.6.19.2 NR SA FR1 event-triggered reporting tests for FR1 with NCSG for inter-frequency measurement	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
6.6.19.3 NR SA FR1 NR - E-UTRAN event-triggered reporting in non-DRX in FR1 with NCSG	Same as 6.6.3.1	Same as 6.6.3.1	Same as 6.6.3.1
6.6.19.4 NR SA FR1 Event triggered reporting on SCC with deactivated SCell test with per-UE NCSG under non-DRX	Same as 6.6.1.8	Same as 6.6.1.8	Same as 6.6.1.8
6.6.20.1 UE Rx-Tx time difference measurement with PRS for RTT-based PDC in FR1 SA	TEST CONFIGURATION 1, 2		
	During T1: Noc : -98dBm/15kHz $\hat{E}s$ / Noc: infinity During T2: Noc: -98dBm/15kHz $\hat{E}s$ / Noc: -2dB	During T1: 0 dB 0 dB During T2: 0 dB 0 dB	During T1: Noc : -98dBm/15kHz $\hat{E}s$ / Noc: infinity During T2: Noc: -98dBm/15kHz $\hat{E}s$ / Noc: -2dB
	TEST CONFIGURATION 3		

	During T1: Noc: -95dBm/30kHz Ês / Noc: infinity During T2: Noc_1: -95dBm/30kHz $Ês_1$ / Noc_1: -2dB	During T1: 0 dB 0 dB During T2: 0 dB 0 dB	During T1: Noc: -95dBm/30kHz Ês / Noc: infinity During T2: Noc_1: -95dBm/30kHz $Ês_1$ / Noc_1: -2dB
6.6.21.1 UE Rx-Tx time difference measurement with TRS for RTT-based PDC in FR1 SA	TEST CONFIGURATION 1, 2		
	During T1: Noc : -98 dBm/15kHz Ês / Noc: infinity During T2: Noc: -98 dBm/15kHz Ês / Noc: -3 dB	During T1: 0 dB 0 dB During T2: 0 dB 0 dB	During T1: Noc : -98 dBm/15kHz Ês / Noc: infinity During T2: Noc: -98 dBm/15kHz Ês / Noc: -3 dB
	TEST CONFIGURATION 3		
	During T1: Noc: -95 dBm/30kHz Ês / Noc: infinity During T2: Noc_1: -95 dBm/30kHz $Ês_1$ / Noc_1: -3 dB	During T1: 0 dB 0 dB During T2: 0 dB 0 dB	During T1: Noc: -95 dBm/30kHz Ês / Noc: infinity During T2: Noc_1: -95 dBm/30kHz $Ês_1$ / Noc_1: -3 dB
6.6.26.1 Intra-frequency SSB based L1-RSRP measurement	**Test configuration 1, 2** During T1: Noc: -101dBm/15kHz $Ês_1$ / Noc: +3dB $Ês_2$ / Noc: +3dB During T2: Noc: -101dBm/15kHz $Ês_1$ / Noc: +13.5dB $Ês_2$ / Noc: +13.5dB Reported Cell 2 SS-RSRP values ± 10dB **Test configuration 3** During T1: Noc: -101dBm/15kHz $Ês_1$ / Noc: +3dB $Ês_2$ / Noc: +3dB During T2: Noc: -101dBm/15kHz $Ês_1$ / Noc: +13.5dB $Ês_2$ / Noc: +13.5dB Reported Cell 2 SS-RSRP values ± 10dB	**Test configuration 1,2** During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB Via mapping **Test configuration 3** During T1: 0dB 0dB 0dB During T2: -1.2dB 0dB 0dB Via mapping	**Test configuration 1,2** During T1: Noc: -101dBm/15kHz $Ês_1$ / Noc: +3dB $Ês_2$ / Noc: +3dB During T2: Noc: -101dBm/15kHz $Ês_1$ / Noc: +13.5dB $Ês_2$ / Noc: +13.5dB Cell 2: RSRP_59 to RSRP_79 **Test configuration 3** During T1: Noc: -101dBm/15kHz $Ês_1$ / Noc: +3dB $Ês_2$ / Noc: +3dB During T2: Noc: -102.2dBm/15kHz $Ês_1$ / Noc: +13.5dB $Ês_2$ / Noc: +13.5dB Cell 2: RSRP_61 to RSRP_81
6.6.27.1 Inter-frequency SSB based L1-RSRP measurement with measurement gap	In signaling: A3-Offset: -6dB During T1: Noc_1: -94.65dBm/15kHz Noc_2: -94.65dBm/15kHz $Ês_1$ / Noc_1: 0dB $Ês_2$ / Noc_2: 0dB During T2:	In signaling: -1dB During T1 : 0dB 0dB 0dB 0dB During T2 :	In signaling: A3-Offset: -7dB During T1: Noc_1: -94.65dBm/15kHz Noc_2: -94.65dBm/15kHz $Ês_1$ / Noc_1: 0dB $Ês_2$ / Noc_2: 0dB During T2:

	Noc_1: -94.65dBm/15kHz Noc_2: -94.65dBm/15kHz $\hat{E}s_1$ / Noc_1: 0dB $\hat{E}s_2$ / Noc_2: +8dB Reported Cell 2 SS-RSRP values ± 10dB	0dB 0dB 0dB 0dB Via mapping	Noc_1: -94.65dBm/15kHz Noc_2: -94.65dBm/15kHz $\hat{E}s_1$ / Noc_1: 0dB $\hat{E}s_2$ / Noc_2: +8dB **Test configuration 1,2** Cell 2: RSRP_60 to RSRP_80 **Test configuration 3** Cell 2: RSRP_63 to RSRP_83
6.6.28.1 Inter-frequency SSB based L1-RSRP measurement without measurement gap	In signaling: A3-Offset: -6dB **Test configuration 1,2** During T1: Noc_1: -101dBm/15kHz Noc_2: -101dBm/15kHz $\hat{E}s_1$ / Noc_1: 3dB $\hat{E}s_2$ / Noc_2: 3dB During T2: Noc_1: -101dBm/15kHz Noc_2: -101dBm/15kHz $\hat{E}s_1$ / Noc_1: +13.5dB $\hat{E}s_2$ / Noc_2: +13.5dB Reported Cell 2 SS-RSRP values ± 10dB **Test configuration 3** During T1: Noc_1: -101dBm/15kHz Noc_2: -101dBm/15kHz $\hat{E}s_1$ / Noc_1: 3dB $\hat{E}s_2$ / Noc_2: 3dB During T2: Noc_1: -101dBm/15kHz Noc_2: -101dBm/15kHz $\hat{E}s_1$ / Noc_1: +13.5dB $\hat{E}s_2$ / Noc_2: +13.5dB Reported Cell 2 SS-RSRP values ± 10dB	In signaling: -1dB **Test configuration 1,2** During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB Via mapping **Test configuration 3** During T1: 0dB 0dB 0dB 0dB During T2: -1.2dB -1.2dB 0dB 0dB Via mapping	In signaling: A3-Offset: -7dB **Test configuration 1,2** During T1: Noc_1: -101dBm/15kHz Noc_2: -101dBm/15kHz $\hat{E}s_1$ / Noc_1: 3dB $\hat{E}s_2$ / Noc_2: 3dB During T2: Noc_1: -101dBm/15kHz Noc_2: -101dBm/15kHz $\hat{E}s_1$ / Noc_1: +13.5dB $\hat{E}s_2$ / Noc_2: +13.5dB Cell 2: RSRP_59 to RSRP_79 **Test configuration 3** During T1: Noc_1: -101dBm/15kHz Noc_2: -101dBm/15kHz $\hat{E}s_1$ / Noc_1: 3dB $\hat{E}s_2$ / Noc_2: 3dB During T2: Noc_1: -102.2dBm/15kHz Noc_2: -102.2dBm/15kHz $\hat{E}s_1$ / Noc_1: +13.5dB $\hat{E}s_2$ / Noc_2: +13.5dB Cell 2: RSRP_61 to RSRP_81
6.7.1.1.1 NR SA FR1 SS-RSRP absolute measurement accuracy	TEST CONFIGURATION 1, 2,		
	Test 1: Noc: -106dBm/15kHz $\hat{E}s1$ / Noc: +6.0dB $\hat{E}s2$ / Noc: +1.0dB Reported RSRP values: ±4.5dB Test 2: Noc: -88dBm/15kHz $\hat{E}s1$ / Noc: +6.0dB $\hat{E}s2$ / Noc: +1.0dB Reported RSRP values: ±8dB Test 3: Noc: -114dBm/15kHz + ΔBG_offset $\hat{E}s1$ / Noc: +3.0dB $\hat{E}s2$ / Noc: -1.0dB Reported RSRP values: ±6dB	Test 1: -1.5dB 0dB +0.4dB Via mapping Test 2: 0dB 0dB +0.4dB Via mapping Test 3: 0dB 0dB +0.2dB Via mapping	Test 1: Noc: -107.5dBm/15kHz $\hat{E}s1$ / Noc: +6.0dB $\hat{E}s2$ / Noc: +1.4dB RSRP_44 to RSRP_56 Test 2: Noc: -88dBm/15kHz $\hat{E}s1$ / Noc: +6.0dB $\hat{E}s2$ / Noc: +1.4dB RSRP_60 to RSRP_79 Test 3: Noc: -114dBm/15kHz + ΔBG_offset $\hat{E}s1$ / Noc: +3.0dB $\hat{E}s2$ / Noc: -0.8dB

			RSRP_36 to RSRP_48 RSRP_36 to RSRP_48 RSRP_37 to RSRP_49 RSRP_37 to RSRP_49 RSRP_38 to RSRP_50 RSRP_39 to RSRP_51 RSRP_39 to RSRP_51 depending on operating band
	TEST CONFIGURATION 3		
	Test 1: Noc: -110dBm/30kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.0dB Reported RSRP values: ±4.5dBN/A Test 2: Noc: -91dBm/30kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.0dB Reported RSRP values: ±8dB Test 3: Noc: -113dBm111dBm/30kHz + ΔBG_offset Ês1 / Noc: +3.0dB Ês2 / Noc: -1.0dB Reported RSRP values: ±6dB	Test 1: -0.8dB 0dB +0.4dB Via mappingN/A Test 2: 0dB 0dB +0.4dB Via mapping Test 3: 0dB-1dB 0dB +0.2dB Via mapping	Test 1: Noc: -110.8dBm/30kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.4dB RSRP_41 to RSRP_53N/A Test 2: Noc: -91dBm/30kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.4dB RSRP_57 to RSRP_76 Test 3: Noc: -113dBm112dBm/30kHz + ΔBG_offset Ês1 / Noc: +3.0dB Ês2 / Noc: -0.8dB RSRP_37 38 to RSRP_4950 RSRP_37 38 to RSRP_4950 RSRP_38 39 to RSRP_5051 RSRP_38 39 to RSRP_5051 RSRP_39 40 to RSRP_5152 RSRP_40 41 to RSRP_5253 RSRP_40 41 to RSRP_5253 depending on operating band
The derivation of the RSRP values takes into account the uncertainty in Cell 2 SS-RSRP from N_{oc} and $\hat{E}s_2 / N_{oc}$, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRP values given above are for normal conditions. In all cases the RSRP values are 4.5dB wider at each end for extreme conditions.			
6.7.1.1.2 NR SA FR1 SS-RSRP relative measurement accuracy	Test 1: Noc: Test configuration 1, 2:-106dBm/15kHz Test configuration 3: Ês1 / Noc: +6.0dB Ês2 / Noc: +1.0dB Reported rel. SS-RSRP values: ±3dB Test 2: Noc: -88dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.0dB Reported rel. SS-RSRP values: ±3dB Test 3: Noc: -114dBm/15kHz + ΔBG_offset Ês1 / Noc: +3.0dB Ês2 / Noc: -1.0dB Reported re. SS-RSRP values: ±3dB	Test 1: 0 dB 0 dB +1.0dB Via mapping Test 2: 0dB 0dB +1.0dB Via mapping Test 3: 0dB 0dB +1.0dB Via mapping	Test 1: Noc: -106 dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +2.0dB RSRP_x-8 to RSRP_x-1 Test 2: Noc: -88dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +2.0dB RSRP_x-8 to RSRP_x-1 Test 3: Noc: -114dBm/15kHz + ΔBG_offset Ês1 / Noc: +3.0dB Ês2 / Noc: 0dB RSRP_x-7 to RSRP_x+1
The derivation of the SS-RSRP values takes into account the uncertainty in Cell 1 and Cell 2 RSRP from N_{oc}, $\hat{E}s_1 / N_{oc}$ and $\hat{E}s_2 / N_{oc}$, the allowed UE reporting accuracy, and the UE mapping function. The RSRP values given above are for both normal and extreme conditions.			
6.7.1.2.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1:	Test 1:	Test 1:

	N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz $\hat{E}s1 / N_{oc1}$: +10.0dB $\hat{E}s2 / N_{oc2}$: +10.0dB Reported RSRP values: ±8dB Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc2}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: +13.0dB $\hat{E}s2 / N_{oc2}$: -3.0dB Reported RSRP values: ±4.5dB	0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	N_{oc1}: -94.65dBm/15kHz N_{oc2}: -94.65dBm/15kHz $\hat{E}s1 / N_{oc1}$: +10.0dB $\hat{E}s2 / N_{oc2}$: +10.0dB RSRP_62 to RSRP_81 Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc2}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: +13.0dB $\hat{E}s2 / N_{oc2}$: -3.0dB RSRP_32 to RSRP_45 RSRP_33 to RSRP_45 RSRP_33 to RSRP_46 RSRP_34 to RSRP_46 RSRP_34 to RSRP_47 RSRP_35 to RSRP_48 RSRP_36 to RSRP_48 depending on operating band
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz $\hat{E}s1 / N_{oc1}$: +10.0dB $\hat{E}s2 / N_{oc2}$: +10.0dB Reported RSRP values: ±8dB Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: +13.0dB $\hat{E}s2 / N_{oc2}$: -3.0dB Reported RSRP values: ±4.5dB	Test 1: -1.35dB -1.35dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -96dBm/15kHz N_{oc2}: -96dBm/15kHz $\hat{E}s1 / N_{oc1}$: +10.0dB $\hat{E}s2 / N_{oc2}$: +10.0dB RSRP_64 to RSRP_83 Test 2: N_{oc}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: +13.0dB $\hat{E}s2 / N_{oc2}$: -3.0dB RSRP_35 to RSRP_48 RSRP_36 to RSRP_48 RSRP_36 to RSRP_49 RSRP_37 to RSRP_49 RSRP_37 to RSRP_50 RSRP_38 to RSRP_51 RSRP_39 to RSRP_51 depending on operating band
The derivation of the RSRP values takes into account the uncertainty in Cell 2 SS-RSRP from N_{oc2} and $\hat{E}s2 / N_{oc2}$, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRP values given above are for normal conditions. For extreme conditions, the RSRP values are 3.0 dB wider at each end for Test 1, and 4.5 dB wider at each for Test 2.			
6.7.1.2.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz $\hat{E}s1 / N_{oc1}$: +10.0dB $\hat{E}s2 / N_{oc2}$: +10.0dB Reported relative RSRP values: ±4.5dB Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: +13.0dB $\hat{E}s2 / N_{oc2}$: -3.0dB Reported relative RSRP values: ±4.5dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz N_{oc2}: -94.65dBm/15kHz $\hat{E}s1 / N_{oc1}$: +10.0dB $\hat{E}s2 / N_{oc2}$: +10.0dB RSRP_x-7 to RSRP_x+7 Test 2: N_{oc}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -118dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: +13.0dB $\hat{E}s2 / N_{oc2}$: -3.0dB RSRP_x-31 to RSRP_x-18
The derivation of the SS-RSRP values takes into account the uncertainty in Cell 1 and Cell 2 RSRP from N_{oc}, $\hat{E}s1 / N_{oc}$ and $\hat{E}s2 / N_{oc}$, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRP values given above are for normal conditions. For extreme conditions, the RSRP values are 1.5dB wider at each end.			
6.7.2.1 NR SA FR1 SS-RSRQ measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1:	Test 1:	Test 1:

	N_{oc}: -85dBm/15kHz $\hat{E}s1 / N_{oc}$: +3.0dB $\hat{E}s2 / N_{oc}$: +3.0dB Reported RSRQ values: ±2.5dB Test 2: N_{oc}: -101dBm/15kHz $\hat{E}s1 / N_{oc}$: -2.9dB $\hat{E}s2 / N_{oc}$: -2.9dB Reported RSRQ values: ±3.5dB Test 3: N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc}$: -4.0dB $\hat{E}s2 / N_{oc}$: -4.0dB Reported RSRQ values: ±3.5dB	-1.5dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0dB Via mapping	N_{oc}: -86.5dBm/15kHz $\hat{E}s1 / N_{oc}$: +3.0dB $\hat{E}s2 / N_{oc}$: +3.0dB RSRQ_52 to RSRQ_62 Test 2: N_{oc}: -101dBm/15kHz $\hat{E}s1 / N_{oc}$: -2.9dB $\hat{E}s2 / N_{oc}$: -2.9dB RSRQ_46 to RSRQ_60 Test 3: N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc}$: -3.5dB $\hat{E}s2 / N_{oc}$: -3.5dB RSRQ_44 to RSRQ_59
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc}: -91dBm/15kHz $\hat{E}s1 / N_{oc}$: +3.0dB $\hat{E}s2 / N_{oc}$: +3.0dB Reported RSRQ values: ±2.5dB Test 2: N/A Test 3: N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc}$: -4.0dB $\hat{E}s2 / N_{oc}$: -4.0dB Reported RSRQ values: ±3.5dB	Test 1: -1.6dB 0dB 0dB Via mapping Test 2: N/A Test 3: 0dB 0dB 0dB Via mapping	Test 1: N_{oc}: -92.6dBm/15kHz $\hat{E}s1 / N_{oc}$: +3.0dB $\hat{E}s2 / N_{oc}$: +3.0dB RSRQ_52 to RSRQ_62 Test 2: N/A Test 3: N_{oc}: -114dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc}$: -3.5dB $\hat{E}s2 / N_{oc}$: -3.5dB RSRQ_44 to RSRQ_59
The derivation of the RSRQ values takes into account the uncertainty in Cell 2 SS-RSRQ from N_{oc} and $\hat{E}s2 / N_{oc}$, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRQ values given above are for normal conditions. For extreme conditions, the SS-RSRQ values are 1.5dB wider at each end for Test 1, and 0.5 dB wider at each for Tests 2 and 3.			
6.7.2.2.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1: N_{oc1}: -80.18 dBm/15kHz N_{oc2}: -80.18 dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±2.5dB Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±2.5dB Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: 3dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±2.5dB	Test 1: -1.5dB -1.5dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -81.68dBm/15kHz N_{oc2}: -81.68dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_52 to RSRQ_62 Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_52 to RSRQ_62 Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: 3dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_52 to RSRQ_62
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc1}: -86.27 dBm/15kHz N_{oc2}: -86.27 dBm/15kHz	Test 1: -1.53dB -1.53dB	Test 1: N_{oc1}: -87.8dBm/15kHz N_{oc2}: -87.8dBm/15kHz

	$\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±2.5dB Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±2.5dB Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: 3dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±2.5dB	0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0dB 0dB Via mapping	$\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_52 to RSRQ_62 Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_52 to RSRQ_62 Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: 3dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_52 to RSRQ_62
The derivation of the RSRQ values takes into account the uncertainty in Cell 2 SS-RSRQ from N_{oc2} and $\hat{E}s2 / N_{oc2}$, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRQ values given above are for normal conditions. For extreme conditions, the RSRQ values are 1.5dB wider at each end.			
6.7.2.2.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1: N_{oc1}: -80.18 dBm/15kHz N_{oc2}: -80.18 dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±3dB Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±3dB Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: 3dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±3dB	Test 1: -1.5dB -1.5dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -81.68dBm/15kHz N_{oc2}: -81.68dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_x-7 to RSRQ_x+7 Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_x-7 to RSRQ_x+7 Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: 3dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_x-11 to RSRQ_x+2
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc1}: -86.27 dBm/15kHz N_{oc2}: -86.27 dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±2.5dB Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±3dB Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: 3dB	Test 1: -1.53dB -1.53dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0dB	Test 1: N_{oc1}: -87.8dBm/15kHz N_{oc2}: -87.8dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_x-7 to RSRQ_x+7 Test 2: N_{oc1}: -106dBm/15kHz N_{oc2}: -106dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_x-7 to RSRQ_x+7 Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} N_{oc2}: -116dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: 3dB

	$\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±3dB	0dB Via mapping	$\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_x-11 to RSRQ_x+2
The derivation of the RSRQ values takes into account the uncertainty in Cell 1 and Cell 2 SS-RSRQ from N_{oc2} and $\hat{E}s2 / N_{oc2}$, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRQ values given above are for normal conditions. For extreme conditions, the RSRQ values are 1dB wider at each end.			
6.7.3.1 NR SA FR1 SS-SINR measurement accuracy	**TEST CONFIGURATION 1, 2, 4, 5**		
	Test 1: N_{oc}: -93dBm/15kHz $\hat{E}s1 / N_{oc}$: +4.54dB $\hat{E}s2 / N_{oc}$: +4.54dB Reported SINR values: ±3.5dB Test 2: N_{oc}: -116dBm/15kHz+ Δ_{BG_offset} $\hat{E}s1 / N_{oc}$: -4dB $\hat{E}s2 / N_{oc}$: -4dB Reported SINR values: ±3.5dB	Test 1: 0dB 0dB 0dB Via mapping Test 2: 0dB 0.5dB 0.5dB Via mapping	Test 1: N_{oc}: -93dBm/15kHz $\hat{E}s1 / N_{oc}$: +4.54dB $\hat{E}s2 / N_{oc}$: +4.54dB SINR_31 to SINR_49 Test 2: N_{oc}: -116dBm/15kHz+ Δ_{BG_offset} $\hat{E}s1 / N_{oc}$: -3.5dB $\hat{E}s2 / N_{oc}$: -3.5dB SINR_28 to SINR_45
	TEST CONFIGURATION 3, 6		
	Test 1: N_{oc}: -93dBm/15kHz $\hat{E}s1 / N_{oc}$: +4.54dB $\hat{E}s2 / N_{oc}$: +4.54dB Reported SINR values: ±3.5dB Test 2: N_{oc}: -116dBm/15kHz+ Δ_{BG_offset} $\hat{E}s1 / N_{oc}$: -4dB $\hat{E}s2 / N_{oc}$: -4dB Reported SINR values: ±3.5dB	Test 1: -0.2dB 0dB 0dB Via mapping Test 2: 0dB 0.5dB 0.5dB Via mapping	Test 1: N_{oc}: -93.2dBm/15kHz $\hat{E}s1 / N_{oc}$: +4.54dB $\hat{E}s2 / N_{oc}$: +4.54dB SINR_31 to SINR_49 Test 2: N_{oc}: -116dBm/15kHz+ Δ_{BG_offset} $\hat{E}s1 / N_{oc}$: -3.5dB $\hat{E}s2 / N_{oc}$: -3.5dB SINR_28 to SINR_45
The derivation of the SINR values takes into account the uncertainty in Cell 2 SS- SINR from N_{oc} and $\hat{E}s2 / N_{oc}$, the allowed UE reporting accuracy, and the UE mapping function. The SS- SINR values given above are for normal conditions. For extreme conditions, the SS- SINR values are 0.5dB wider at each end.			
6.7.3.2.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy	**TEST CONFIGURATION 1, 2, 3, 4, 5, 6**		
	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported SINR values: ±3dB Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s1 / N_{oc1}$: 20dB $\hat{E}s2 / N_{oc2}$: 20dB Reported SINR values: ±3dB Test 3: N_{oc1}: -119.5dBm/15kHz + Δ_{BG_offset} N_{oc2}: -119.5dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: -4dB $\hat{E}s2 / N_{oc2}$: -4dB Reported SINR values: ±3.5dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0.8dB 0.8dB Via mapping	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB SINR_35 to SINR_51 Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s1 / N_{oc1}$: 20dB $\hat{E}s2 / N_{oc2}$: 20dB SINR_79 to SINR_94 Test 3: N_{oc1}: -119.5dBm/15kHz + Δ_{BG_offset} N_{oc2}: -119.5dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: -3.2dB $\hat{E}s2 / N_{oc2}$: -3.2dB SINR_32 to SINR_49
The derivation of the SINR values takes into account the uncertainty in Cell 2 SS- SINR from N_{oc} and $\hat{E}s2 / N_{oc}$, the allowed UE reporting accuracy, and the UE mapping function. The SS- SINR values given above are for normal conditions. For extreme conditions, the SS- SINR values are 1dB wider at each for Tests 1 and 2 and 0.5dB wider at each end for Test 3.			

6.7.3.2.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy	**TEST CONFIGURATION 1, 2, 3, 4, 5, 6**		
	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported SINR values: ±3.5dB Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s1 / N_{oc1}$: 20dB $\hat{E}s2 / N_{oc2}$: 20dB Reported SINR values: ±3.5dB Test 3: N_{oc1}: -119.5dBm/15kHz + Δ_{BG_offset} N_{oc2}: -119.5dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: -4dB $\hat{E}s2 / N_{oc2}$: -4dB Reported SINR values: ±4dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0.8dB 0.8dB Via mapping	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB SINR_x-10 to SINR_x+10 Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s1 / N_{oc1}$: 20dB $\hat{E}s2 / N_{oc2}$: 20dB SINR_x-10 to SINR_x+10 Test 3: N_{oc1}: -119.5dBm/15kHz + Δ_{BG_offset} N_{oc2}: -119.5dBm/15kHz + Δ_{BG_offset} $\hat{E}s1 / N_{oc1}$: -3.2dB $\hat{E}s2 / N_{oc2}$: -3.2dB SINR_x-11 to SINR_x+11
The derivation of the SINR values takes into account the uncertainty in Cell 1 and Cell 2 SS- SINR from N_{oc} and $\hat{E}s2 / N_{oc}$, the allowed UE reporting accuracy, and the UE mapping function. The SS- SINR values given above are for normal conditions. For extreme conditions, the SS- SINR values are 0.5dB wider at each for Tests 1 and 2 and 0dB wider at each end for Test 3.			
6.7.4.1.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy			
Test Configuration 1,2,4,5	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}s_1 / N_{oc1}$: 10dB Reported L1-RSRP values: ±8.5dB (±3dB additionally for extreme conditions) Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1 / N_{oc1}$: -3dB Reported L1-RSRP values: ±5dB (±4.5dB additionally for extreme conditions)	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz $\hat{E}s_1 / N_{oc1}$: 10dB RSRP_62 to RSRP_82 Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1 / N_{oc1}$: -2.2dB RSRP_31 to RSRP_44 RSRP_31 to RSRP_45 RSRP_32 to RSRP_45 RSRP_32 to RSRP_46 RSRP_33 to RSRP_46 RSRP_34 to RSRP_47 RSRP_34 to RSRP_48 depending on operating band
Test Configuration 3,6	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}s_1 / N_{oc1}$: 10dB Reported L1-RSRP values: ±8.5dB (±3dB additionally for extreme conditions) Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1 / N_{oc1}$: -3dB Reported L1-RSRP values: ±5dB (±4.5dB additionally for extreme conditions)	Test 1: -1.35dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -96dBm/15kHz $\hat{E}s_1 / N_{oc1}$: 10dB RSRP_63 to RSRP_84 Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1 / N_{oc1}$: -2.2dB RSRP_34 to RSRP_47 RSRP_34 to RSRP_48 RSRP_35 to RSRP_48 RSRP_35 to RSRP_49 RSRP_36 to RSRP_49 RSRP_37 to RSRP_50 RSRP_37 to RSRP_51 depending on operating band

6.7.4.1.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy			
Test Configuration 1,2,4,5	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}s_1$ / N_{oc1}: 10dB Reported differential L1-RSRP values for normal conditions: -4.6dB to 0dB Reported differential L1-RSRP values for extreme conditions: -5.6dB to 0dB Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1$ / N_{oc1}: -3dB Reported differential L1-RSRP values for normal conditions: -4.6dB to 0dB Reported differential L1-RSRP values for extreme conditions: -5.6dB to 0dB	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz $\hat{E}s_1$ / N_{oc1}: 10dB DIFFRSRP_0 to DIFFRSRP_2 DIFFRSRP_0 to DIFFRSRP_2 Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1$ / N_{oc1}: -2.2dB DIFFRSRP_0 to DIFFRSRP_2 DIFFRSRP_0 to DIFFRSRP_2
Test Configuration 3,6	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}s_1$ / N_{oc1}: 10dB Reported differential L1-RSRP values for normal conditions: -4.6dB to 0dB Reported differential L1-RSRP values for extreme conditions: -5.6dB to 0dB Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1$ / N_{oc1}: -3dB Reported differential L1-RSRP values for normal conditions: -4.6dB to 0dB Reported differential L1-RSRP values for extreme conditions: -5.6dB to 0dB	Test 1: -1.35dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -96dBm/15kHz $\hat{E}s_1$ / N_{oc1}: 10dB DIFFRSRP_0 to DIFFRSRP_2 DIFFRSRP_0 to DIFFRSRP_2 Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1$ / N_{oc1}: -2.2dB DIFFRSRP_0 to DIFFRSRP_2 DIFFRSRP_0 to DIFFRSRP_2
6.7.4.2.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy	Same as 6.7.4.1.1	Same as 6.7.4.1.1	Same as 6.7.4.1.1
6.7.4.2.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy	Same as 6.7.4.1.2	Same as 6.7.4.1.2	Same as 6.7.4.1.2
6.7.5.1 NR SA FR1 – E-UTRAN RSRP absolute measurement accuracy	Test 1: N_{oc}: -91.65dBm/15kHz $\hat{E}_s$ / N_{oc}: +10.0dB Reported RSRP values: ±8dB (±3dB additionally for extreme conditions) Test 2: N_{oc}: -117dBm/15kHz+ Δ_{BG_offset} $\hat{E}_s$ / N_{oc}: -4.0dB Reported RSRP values: ±4.5dB (±4.5dB additionally for extreme conditions)	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc}: -91.65dBm/15kHz $\hat{E}s$ / N_{oc}: 10dB RSRP_49 to RSRP_69 Test 2: N_{oc}: -117dBm/15kHz+ Δ_{BG_offset} $\hat{E}s$ / N_{oc}: -3.2dB RSRP_14 to RSRP_27 RSRP_15 to RSRP_27 RSRP_15 to RSRP_28 RSRP_16 to RSRP_28 RSRP_16 to RSRP_29 RSRP_17 to RSRP_30 RSRP_18 to RSRP_30 Depending on operating band
6.7.6.1 NR SA FR1 – E-UTRAN RSRQ absolute measurement accuracy	Test 1: N_{oc}: -83dBm/15kHz $\hat{E}_s$ / N_{oc}: -1.75dB Reported RSRQ values: ±2.5dB (±1.5dB additionally for extreme conditions) Test 2: N_{oc}: -104.7dBm/15kHz $\hat{E}_s$ / N_{oc}: -4.0dB Reported RSRQ values: ±3.5dB	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc}: -83dBm/15kHz $\hat{E}s$ / N_{oc}: -1.75dB RSRQ_4 to RSRQ_16 Test 2: N_{oc}: -104.7dBm/15kHz $\hat{E}s$ / N_{oc}: -3.2dB RSRQ_0 to RSRQ_16

	(±0.5dB additionally for extreme conditions) Test 3: N_{oc}: -119.5dBm/15kHz+ Δ_{BG_offset} $\hat{E}_s$ / N_{oc}: -4.0dB Reported RSRQ values: ±3.5dB (±0.5dB additionally for extreme conditions)	 Test 3: 0dB 0.8dB Via mapping	 <u>Test 3:</u> N_{oc}: -119.5dBm/15kHz+ Δ_{BG_offset} $\hat{E}s$ / N_{oc}: -3.2dB RSRQ_0 to RSRQ_16
6.7.7.1 NR SA FR1 – E-UTRAN RS-SINR absolute measurement accuracy	Test 1: N_{oc}: -88dBm/15kHz $\hat{E}_s$ / N_{oc}: -1.75dB Reported RS-SINR values: ±3.0dB (±1.0dB additionally for extreme conditions) Test 2: N_{oc}: -108.5dBm/15kHz $\hat{E}_s$ / N_{oc}: 20.0dB Reported RS-SINR values: ±3.0dB (±1.0dB additionally for extreme conditions) Test 3: N_{oc}: -119.5dBm/15kHz+ Δ_{BG_offset} $\hat{E}_s$ / N_{oc}: -4.0dB Reported RS-SINR values: ±3.5dB (±0.5dB additionally for extreme conditions)	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0dB Via mapping Test 3: 0dB 0.8dB Via mapping	<u>Test 1:</u> N_{oc}: -88dBm/15kHz $\hat{E}s$ / N_{oc}: -1.75dB SINR_35 to SINR_51 <u>Test 2:</u> N_{oc}: -108.5dBm/15kHz $\hat{E}s$ / N_{oc}: 20.0dB SINR_79 to SINR_94 <u>Test 3:</u> N_{oc}: -119.5dBm/15kHz+ Δ_{BG_offset} $\hat{E}s$ / N_{oc}: -3.2dB SINR_32 to SINR_49
6.7.8.1 NR SA FR1 SRS-RSRP measurement accuracy	Test Configuration 1: Test 1: N_{oc} = -106dBm/15kHz $\hat{E}_s$ / N_{oc} = +1dB Reported SRS-RSRP values: ±3dB Test 2: N_{oc} = -88dBm/15kHz $\hat{E}_s$ / N_{oc} = +1dB Reported SRS-RSRP values: ±6.5dB Test 3: N_{oc} = -114+Δ_{BG_offset} dBm/15kHz $\hat{E}_s$ / N_{oc} = +1dB Reported SRS-RSRP values: ±3dB Test Configuration 2: Test 1: Test 1 is not used when configuring SCS 30kHz Test 2: N_{oc} = -91dBm/15kHz $\hat{E}_s$ / N_{oc} = +1dB Reported SRS-RSRP values: ±7dB Test 3: N_{oc} = -114+ Δ_{BG_offset} dBm/15kHz $\hat{E}_s$ / N_{oc} = +1dB Reported SRS-RSRP values: ±3.5dB	Test Config 1: <u>Test 1:</u> <u>0dB</u> <u>+0.5dB</u> Via mapping <u>Test 2:</u> <u>0dB</u> <u>+0.5dB</u> Via mapping <u>Test 3:</u> <u>0dB</u> <u>+0.75dB for BG_A</u> <u>+0.5dB otherwise</u> Via mapping Test Config 2: <u>Test 1:</u> <u>N/A</u> <u>Test 2:</u> <u>0dB</u> <u>+0.5dB</u> Via mapping <u>Test 3:</u> <u>0dB</u> <u>+1.25dB for BG_A</u> <u>+0.5dB otherwise</u> Via mapping	Test Config 1: <u>Test 1:</u> N_{oc} = -106dBm/15kHz $\hat{E}_s$ / N_{oc} = +1.5dB Reported SRS-RSRP: 30 to 41 <u>Test 2:</u> N_{oc} = -88dBm/15kHz $\hat{E}_s$ / N_{oc} = +1.5dB Reported SRS-RSRP: 45 to 62 <u>Test 3:</u> N_{oc} = -114+Δ_{BG_offset} dBm/15kHz $\hat{E}_s$ / N_{oc} = +1.75dB for BG_A $\hat{E}_s$ / N_{oc} = +1.5dB otherwise Reported SRS-RSRP: BG_A: 23 to 33 BG_C: 23 to 34 BG_D: 24 to 34 BG_E: 24 to 35 Test Config 2: <u>Test 1:</u> N/A <u>Test 2:</u> N_{oc} = -91dBm/15kHz $\hat{E}_s$ / N_{oc} = +1.5dB Reported SRS-RSRP: 44 to 63 <u>Test 3:</u> N_{oc} = -114+Δ_{BG_offset} dBm/15kHz $\hat{E}_s$ / N_{oc} = +2.25dB for BG_A $\hat{E}_s$ / N_{oc} = +1.5dB otherwise Reported SRS-RSRP: BG_A: 26 to 37 BG_C: 26 to 37 BG_D: 26 to 38 BG_E: 27 to 38
6.7.9.1.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR absolute measurement accuracy			
Test Configuration 1,2,4,5	Same as 4.7.7.1	Same as 4.7.7.1	Same as 4.7.7.1
Test Configuration 3,6	Same as 4.7.7.1	Same as 4.7.7.1	Same as 4.7.7.1

6.7.9.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy			
Test Configuration 1,2,4,5	Same as 4.7.7.2	Same as 4.7.7.2	Same as 4.7.7.2
Test Configuration 3,6	Same as 4.7.7.2	Same as 4.7.7.2	Same as 4.7.7.2
6.7.9.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy			
Test Configuration 1,2,4,5	Same as 4.7.7.3	Same as 4.7.7.3	Same as 4.7.7.3
Test Configuration 3,6	Same as 4.7.7.3	Same as 4.7.7.3	Same as 4.7.7.3
6.7.17.1.1 Inter-frequency L1-RSRP absolute accuracy requirements for neighbour cell in FR1	**Test configuration 1, 2** Test 1 : Noc_1: -94.65dBm/15kHz Noc_2: -94.65dBm/15kHz $\hat{E}s_1 / Noc_1$: +10dB $\hat{E}s_2 / Noc_2$: +10dB Normal condition : Reported Cell 2 SS-RSRP values ± 10dB Extreme condition : Reported Cell 2 SS-RSRP values ± 13dB Test 2 : Noc_1: -109dBm/15kHz + Δ_{BG_offset} Noc_2: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1 / Noc_1$: +13dB $\hat{E}s_2 / Noc_2$: -3dB Normal condition : Reported Cell 2 SS-RSRP values ± 6.5dB Extreme condition : Reported Cell 2 SS-RSRP values ± 11dB	**Test configuration 1, 2** Test 1 : 0dB 0dB 0dB 0dB Via mapping Test 2 : 0dB 0dB 0dB 0.3dB Via mapping	**Test configuration 1, 2** Test 1 : Noc_1: -94.65dBm/15kHz Noc_2: -94.65dBm/15kHz $\hat{E}s_1 / Noc_1$: +10dB $\hat{E}s_2 / Noc_2$: +10dB Normal condition: RSRP_62 to RSRP_82 Extreme condition: RSRP_59 to RSRP_85 Test 2: Noc_1: -109dBm/15kHz + Δ_{BG_offset} Noc_2: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1 / Noc_1$: +13dB $\hat{E}s_2 / Noc_2$: -2.7dB Normal condition: RSRP_30 to RSRP_43 RSRP_31 to RSRP_44 RSRP_31 to RSRP_44 RSRP_32 to RSRP_45 RSRP_32 to RSRP_45 RSRP_33 to RSRP_46 RSRP_33 to RSRP_46 RSRP_34 to RSRP_47 RSRP_37 to RSRP_50 Depending on band groups Extreme condition: RSRP_26 to RSRP_48 RSRP_26 to RSRP_48 RSRP_27 to RSRP_49 RSRP_27 to RSRP_49 RSRP_28 to RSRP_50 RSRP_28 to RSRP_50 RSRP_29 to RSRP_51 RSRP_29 to RSRP_51 RSRP_32 to RSRP_54 Depending on band groups
	Test configuration 3 Test 1 : Noc_1: -94.65dBm/15kHz Noc_2: -94.65dBm/15kHz $\hat{E}s_1 / Noc_1$: +10dB $\hat{E}s_2 / Noc_2$: +10dB Normal condition : Reported Cell 2 SS-RSRP values ± 10dB Extreme condition :	**Test configuration 3** Test 1 : -1.35dB -1.35dB 0dB 0dB Via mapping	**Test configuration 3** Test 1 : Noc_1: -96dBm/15kHz Noc_2: -96dBm/15kHz $\hat{E}s_1 / Noc_1$: +10dB $\hat{E}s_2 / Noc_2$: +10dB Normal condition: RSRP_63 to RSRP_84 Extreme condition: RSRP_60 to RSRP_87

	Reported Cell 2 SS-RSRP values ± 13dB Test 2 : Noc_1: -109dBm/15kHz + Δ_{BG_offset} Noc_2: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1$ / Noc_1: +13dB $\hat{E}s_2$ / Noc_2: -3dB Normal condition : Reported Cell 2 SS-RSRP values ± 6.5dB Extreme condition : Reported Cell 2 SS-RSRP values ± 11dB	 <u>Test 2 :</u> 0dB 0dB 0dB 0.3dB <u>Via mapping</u>	 Test 2: Noc_1: -109dBm/15kHz + Δ_{BG_offset} Noc_2: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1$ / Noc_1: +13dB $\hat{E}s_2$ / Noc_2: -2.7dB Normal condition: RSRP_33 to RSRP_46 RSRP_34 to RSRP_47 RSRP_34 to RSRP_47 RSRP_35 to RSRP_48 RSRP_35 to RSRP_48 RSRP_36 to RSRP_49 RSRP_36 to RSRP_49 RSRP_37 to RSRP_50 RSRP_40 to RSRP_53 Depending on band groups Extreme condition: RSRP_29 to RSRP_51 RSRP_29 to RSRP_51 RSRP_30 to RSRP_52 RSRP_30 to RSRP_52 RSRP_31 to RSRP_53 RSRP_31 to RSRP_53 RSRP_32 to RSRP_54 RSRP_32 to RSRP_54 RSRP_35 to RSRP_57 Depending on band groups

Table F.1.3.2-3: Derivation of test requirements for EN-DC FR2 RRM tests

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
5.3.2.2.1 EN-DC FR2 contention based random access	Absolute uplink power: $P_{int} \geq P \geq P_{min}$ ±14.0dB $P_{UMAX} \geq P > P_{int}$ ±12.0dB Relative uplink power step: $P_{int} \geq P \geq P_{min}$ ±6.0dB $P_{UMAX} \geq P > P_{int}$ ±4.0dB Uplink timing: 120kHz SCS T_e ±3.5*64*T_c	 Not applicable due to UL calibration FFS dB FFS dB [48]T_c	Absolute uplink power: ±FFSdB Relative uplink power step: ±(6+FFS)dB, either PRACH being compared ≤ (P_{max} – 6dB) ±(4+FFS)dB, both PRACHs being compared > (P_{max} – 6dB) Uplink timing: 120kHz SCS T_e ±224±[48]*T_c
5.3.2.2.2 EN-DC FR2 non-contention based random access	Same as 5.3.2.2.1	Same as 5.3.2.2.1	Same as 5.3.2.2.1
5.4.1.1 EN-DC FR2 UE transmit timing accuracy	<u>Test 1 (no DRX):</u> Uplink timing: ±3*64*T_c for 240 kHz SSB SCS Max step size T_q: 2.5*64*T_c Min adjust rate T_p: 2.5*64*T_c Max adjust rate: 2.5*64*T_c N_{oc} = -112 dBm/15 kHz $\hat{E}s_2$ / N_{oc}: +4.0dB <u>Test 2 (with DRX):</u> Uplink timing: ±3*64*T_c for 240 kHz SSB SCS N_{oc} = -112 dBm/15 kHz	 ±0.75*64*T_c +0.625*64T_c -3.725*64*T_c +1.225*64*T_c 0dB 0dB ±0.75*64*T_c 0dB	<u>Test 1 (no DRX):</u> Uplink timing: ±3.75*64*T_c Max step size T_q: 3.125*64*T_c Min adjust rate: -1.225*64*T_c Max adjust rate: 3.725*64*T_c N_{oc} = -112 dBm/15 kHz $\hat{E}s_2$ / N_{oc}: +4.0dB <u>Test 2 (with DRX):</u> Uplink timing: ±3.75*64*T_c N_{oc} = -112 dBm/15 kHz

	$\hat{E}s_2$ / N_{oc}: +4.0dB	0dB	$\hat{E}s_2$ / N_{oc}: +4.0dB
5.4.1.2 NR UE Transmit Timing Test with 2-TA for FR2 UE supporting multiDCI-IntraCellMultiTRP-TwoTA-r18	Same as 5.4.1.1	Same as 5.4.1.1	Same as 5.4.1.1
5.4.3.1 EN-DC FR2 UE timing advance adjustment accuracy	Noc = -112 dBm/15 kHz $\hat{E}s1$ / Noc = 4 dB UE Timing Advance Adjustment Accuracy for 120kHz SCS = ±32 Tc	0dB 0dB +/- 40 Tc	Noc = -112 dBm/15 kHz $\hat{E}s1$ / Noc = 4 dB UE TAAA for 120kHz SCS = ±72 Tc
5.5.1.1 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	During T1: Noc: -92.1 dBm/15kHz $\hat{E}s1$ / Noc: +2 dB $\hat{E}s2$ / Noc: +2 dB During T2: Noc: -92.1dBm/15kHz $\hat{E}s1$ / Noc: -6 dB $\hat{E}s2$ / Noc: -15 dB During T3: Noc: -92.1dBm/15kHz $\hat{E}s1$ / Noc: -15 dB $\hat{E}s2$ / Noc: -15 dB	During T1: -2.7 dB 2.1 dB 2.1 dB During T2: -2.7 dB 2.1 dB 0 dB During T3: -2.7 dB 0 dB 0 dB	During T1: Noc: -94.8 dBm/15kHz $\hat{E}s1$ / Noc: +4.1 dB $\hat{E}s2$ / Noc: +4.1 dB During T2: Noc: -94.8 dBm/15kHz $\hat{E}s1$ / Noc: -3.9 dB $\hat{E}s2$ / Noc: -15 dB During T3: Noc: -94.8 dBm/15kHz $\hat{E}s1$ / Noc: -15 dB $\hat{E}s2$ / Noc: -15 dB
5.5.1.2 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	During T1: Noc: -92.1 dBm/15kHz $\hat{E}s1$ / Noc: +2 dB $\hat{E}s2$ / Noc: +2 dB During T2: Noc: -92.1dBm/15kHz $\hat{E}s1$ / Noc: -6 dB $\hat{E}s2$ / Noc: -15 dB During T3: Noc: -92.1dBm/15kHz $\hat{E}s1$ / Noc: -15 dB $\hat{E}s2$ / Noc: -15 dB During T4: Noc: -92.1dBm/15kHz $\hat{E}s1$ / Noc: -15 dB $\hat{E}s2$ / Noc: -4.5 dB During T5: Noc: -92.1dBm/15kHz $\hat{E}s1$ / Noc: -15 dB $\hat{E}s2$ / Noc: +2 dB	During T1: -2.7 dB 2.1 dB 2.1 dB During T2: -2.7 dB 2.1 dB 0 dB During T3: -2.7 dB 0 dB 0 dB During T4: -2.7 dB 0 dB 0 dB During T5: -2.7 dB 0 dB 2.1 dB	During T1: Noc: -94.8 dBm/15kHz $\hat{E}s1$ / Noc: +4.1 dB $\hat{E}s2$ / Noc: +4.1 dB During T2: Noc: -94.8 dBm/15kHz $\hat{E}s1$ / Noc: -3.9 dB $\hat{E}s2$ / Noc: -15 dB During T3: Noc: -94.8 dBm/15kHz $\hat{E}s1$ / Noc: -15 dB $\hat{E}s2$ / Noc: -15 dB During T4: Noc: -94.8 dBm/15kHz $\hat{E}s1$ / Noc: -15 dB $\hat{E}s2$ / Noc: -4.5 dB During T5: Noc: -94.8 dBm/15kHz $\hat{E}s1$ / Noc: -15 dB $\hat{E}s2$ / Noc: +4.1 dB
5.5.1.3 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode	During T1: Noc: -104.7 dBm/15kHz $\hat{E}s1$ / Noc: +2 dB $\hat{E}s2$ / Noc: +2 dB During T2: Noc: -104.7 dBm/15kHz $\hat{E}s1$ / Noc: -6 dB $\hat{E}s2$ / Noc: -15 dB During T3: Noc: -104.7 dBm/15kHz $\hat{E}s1$ / Noc: -15 dB $\hat{E}s2$ / Noc: -15 dB	During T1: 0 dB 1.3 dB 1.3 dB During T2: 0 dB 1.3 dB -0.4 dB During T3: 0 dB -0.4 dB -0.4 dB	During T1: Noc: -104.7 dBm/15kHz $\hat{E}s1$ / Noc: +3.3 dB $\hat{E}s2$ / Noc: +3.3 dB During T2: Noc: -104.7 dBm/15kHz $\hat{E}s1$ / Noc: -4.7 dB $\hat{E}s2$ / Noc: -15.4 dB During T3: Noc: -104.7 dBm/15kHz $\hat{E}s1$ / Noc: -15.4 dB $\hat{E}s2$ / Noc: -15.4 dB
5.5.1.4 EN-DC FR2 radio link monitoring in-sync test for PSCell configured	During T1: Noc: -104.7 dBm/15kHz $\hat{E}s1$ / Noc: +2 dB	During T1: 0 dB 1.3 dB	During T1: Noc: -104.7 dBm/15kHz $\hat{E}s1$ / Noc: +3.3 dB

with SSB-based RLM RS in DRX mode	Ês2 / Noc: +2 dB During T2: Noc: -104.7 dBm/15kHz Ês1 / Noc: -6 dB Ês2 / Noc: -15 dB During T3: Noc: -104.7 dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB During T4: Noc: -104.7 dBm/15kHz Ês1 / Noc: -4.5 dB Ês2 / Noc: -15 dB During T5: Noc: -104.7 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: -14 dB	1.3 dB During T2: 0 dB 1.3 dB -0.4 dB During T3: 0 dB -0.4 dB -0.4 dB During T4: 0 dB -0.4 dB -0.4 dB During T5: 0 dB 1.3 dB -0.4 dB	Ês2 / Noc: +3.3 dB During T2: Noc: -104.7 dBm/15kHz Ês1 / Noc: -4.7 dB Ês2 / Noc: -15.4 dB During T3: Noc: -104.7 dBm/15kHz Ês1 / Noc: -15.4 dB Ês2 / Noc: -15.4 dB During T4: Noc: -104.7 dBm/15kHz Ês1 / Noc: -4.9 dB Ês2 / Noc: -15.4 dB During T5: Noc: -104.7 dBm/15kHz Ês1 / Noc: 3.3 dB Ês2 / Noc: -15.4 dB
5.5.1.5 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	During T1: Noc: -92.1 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: +2 dB During T2: Noc: -92.1dBm/15kHz Ês1 / Noc: -6 dB Ês2 / Noc: -15 dB During T3: Noc: -92.1dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB	During T1: -2.7 dB 2.1 dB 2.1 dB During T2: -2.7 dB 2.1 dB 0 dB During T3: -2.7 dB 0 dB 0 dB	During T1: Noc: -94.8 dBm/15kHz Ês1 / Noc: +4.1 dB Ês2 / Noc: +4.1 dB During T2: Noc: -94.8 dBm/15kHz Ês1 / Noc: -3.9 dB Ês2 / Noc: -15 dB During T3: Noc: -94.8 dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB
5.5.1.6 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode	During T1: Noc: -92.1 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: +2 dB During T2: Noc: -92.1dBm/15kHz Ês1 / Noc: -6 dB Ês2 / Noc: -15 dB During T3: Noc: -92.1dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB During T4: Noc: -92.1dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -4.5 dB During T5: Noc: -92.1dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: +2 dB	During T1: -2.7 dB 2.1 dB 2.1 dB During T2: -2.7 dB 2.1 dB 0 dB During T3: -2.7 dB 0 dB 0 dB During T4: -2.7 dB 0 dB 0 dB During T5: -2.7 dB 0 dB 2.1 dB	During T1: Noc: -94.8 dBm/15kHz Ês1 / Noc: +4.1 dB Ês2 / Noc: +4.1 dB During T2: Noc: -94.8 dBm/15kHz Ês1 / Noc: -3.9 dB Ês2 / Noc: -15 dB During T3: Noc: -94.8 dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB During T4: Noc: -94.8 dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -4.5 dB During T5: Noc: -94.8 dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: +4.1 dB
5.5.1.7 EN-DC FR2 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	During T1: Noc: -104.7 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: +2 dB During T2: Noc: -104.7dBm/15kHz Ês1 / Noc: -6 dB Ês2 / Noc: -15 dB	During T1: 0 dB 1.3 dB 1.3 dB During T2: 0 dB 1.3 dB -0.4 dB	During T1: Noc: -104.7 dBm/15kHz Ês1 / Noc: +3.3 dB Ês2 / Noc: +3.3 dB During T2: Noc: -104.7 dBm/15kHz Ês1 / Noc: -4.7 dB Ês2 / Noc: -15.4 dB

	During T3: Noc: -104.7dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB	During T3: 0 dB -0.4 dB -0.4 dB	During T3: Noc: -104.7 dBm/15kHz Ês1 / Noc: -15.4 dB Ês2 / Noc: -15.4 dB
5.5.1.8 EN-DC FR2 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode	During T1: Noc: -104.7 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: +2 dB During T2: Noc: -104.7dBm/15kHz Ês1 / Noc: -6 dB Ês2 / Noc: -15 dB During T3: Noc: -104.7dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB During T4: Noc: -104.7dBm/15kHz Ês1 / Noc: -4.5 dB Ês2 / Noc: -15 dB During T5: Noc: -104.7dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: -15 dB	During T1: 0 dB 1.3 dB 1.3 dB During T2: 0 dB 1.3 dB -0.4 dB During T3: 0 dB -0.4 dB -0.4 dB During T4: 0 dB -0.4 dB -0.4 dB During T5: 0 dB 1.3 dB -0.4 dB	During T1: Noc: -104.7 dBm/15kHz Ês1 / Noc: +3.3 dB Ês2 / Noc: +3.3 dB During T2: Noc: -104.7 dBm/15kHz Ês1 / Noc: -4.7 dB Ês2 / Noc: -15.4 dB During T3: Noc: -104.7 dBm/15kHz Ês1 / Noc: -15.4 dB Ês2 / Noc: -15.4 dB During T4: Noc: -104.7 dBm/15kHz Ês1 / Noc: -4.9 dB Ês2 / Noc: -15.4 dB During T5: Noc: -104.7 dBm/15kHz Ês1 / Noc: 3.3 dB Ês2 / Noc: -15.4 dB
5.5.1.9 EN-DC FR2 radio link monitoring UE scheduling restrictions	During T1: Noc: -92.1 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: +2 dB	During T1: -2.7 dB 2.1 dB 2.1 dB	During T1: Noc: -94.8 dBm/15kHz Ês1 / Noc: +4.1 dB Ês2 / Noc: +4.1 dB
5.5.1.10 EN-DC FR2 Radio Link Monitoring Out-of-sync Test for PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion	During T1: Noc: -104.7 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: +2 dB During T2: Noc: -104.7dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: +2 dB During T3: Noc: -104.7dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB	During T1: 0 dB 1.25 dB 1.25 dB During T2: 0 dB 1.25 dB 1.25 dB During T3: 0 dB -0.5 dB -0.5 dB	During T1: Noc: -104.7 dBm/15kHz Ês1 / Noc: +3.25 dB Ês2 / Noc: +3.25 dB During T2: Noc: -104.7 dBm/15kHz Ês1 / Noc: +3.25 dB Ês2 / Noc: +3.25 dB During T3: Noc: -104.7 dBm/15kHz Ês1 / Noc: -15.5 dB Ês2 / Noc: -15.5 dB
5.5.2.3 EN-DC FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC	During T1: Noc1: -111.7 dBm/15kHz Noc2: -104.7 dBm/15kHz Ês1 / Noc: +12 dB Ês2 / Noc: +5 dB	During T1: 0 dB 0 dB 0 dB 0 dB	During T1: Noc1: -111.7 dBm/15kHz Noc2: -104.7 dBm/15kHz Ês1 / Noc: +12 dB Ês2 / Noc: +5 dB
5.5.2.3 EN-DC FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC	During T1: Noc1: -111.7 dBm/15kHz Noc2: -104.7 dBm/15kHz Ês1 / Noc: +12 dB Ês2 / Noc: +5 dB	During T1: 0 dB 0 dB 0 dB 0 dB	During T1: Noc1: -111.7 dBm/15kHz Noc2: -104.7 dBm/15kHz Ês1 / Noc: +12 dB Ês2 / Noc: +5 dB
5.5.3.1 EN-DC FR2 SCell activation and deactivation intra-band in non-DRX	During T1: Noc_2: -104.7dBm/15kHz Noc_3: -104.7dBm/15kHz $Ês_2$ / Noc_2: +7dB $Ês_3$ / Noc_3: +7dB During T2: Noc_2: -104.7dBm/15kHz Noc_3: -104.7dBm/15kHz $Ês_2$ / Noc_2: +7dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB	During T1: Noc_2: -104.7dBm/15kHz Noc_3: -104.7dBm/15kHz $Ês_2$ / Noc_2: +7dB $Ês_3$ / Noc_3: +7dB During T2: Noc_2: -104.7dBm/15kHz Noc_3: -104.7dBm/15kHz $Ês_2$ / Noc_2: +7dB

	$\hat{E}s_3$ / Noc_3: +7dB During T3: Noc_2: -104.7dBm/15kHz Noc_3: -104.7dBm/15kHz $\hat{E}s_2$ / Noc_2: +7dB $\hat{E}s_3$ / Noc_3: +7dB	0dB During T3: 0dB 0dB 0dB 0dB	$\hat{E}s_3$ / Noc_3: +7dB During T3: Noc_2: -104.7dBm/15kHz Noc_3: -104.7dBm/15kHz $\hat{E}s_2$ / Noc_2: +7dB $\hat{E}s_3$ / Noc_3: +7dB
5.5.3.7 EN-DC FR2 direct SCell activation at SCell addition of known SCell	Same as 5.5.3.1	Same as 5.5.3.1	Same as 5.5.3.1
5.5.3.8 EN-DC FR2 fast SCell Activation for SCell in FR2 intra-band	During T1: Noc_2: -104.7 dBm/15kHz Noc_3: -104.7 dBm/15kHz $\hat{E}s_2$ / Noc_2: +7 dB $\hat{E}s_3$ / Noc_3: +7 dB During T2: Noc_2: -104.7 dBm/15kHz Noc_3: -104.7 dBm/15kHz $\hat{E}s_2$/ Noc_2: +7 dB $\hat{E}s_3$/ Noc_3: +7 dB In signalling: A3-offset = -15dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB In signalling: 0dB	During T1: Noc_2: -104.7 dBm/15kHz Noc_3: -104.7 dBm/15kHz $\hat{E}s_2$ / Noc_2: +7 dB $\hat{E}s_3$ / Noc_3: +7 dB During T2: Noc_2: -104.7 dBm/15kHz Noc_3: -104.7 dBm/15kHz $\hat{E}s_2$/ Noc_2: +7 dB $\hat{E}s_3$/ Noc_3: +7 dB In signalling: A3-offset = -15dB
5.5.5.1 EN-DC FR2 SSB-based beam failure detection and link recovery in non-DRX	During T1: SNR_SSB q_0: 5 dB SNR_SSB q_1: 0.2 dB During T2: SNR_SSB q_0: -3 dB SNR_SSB q_1: 0.2 dB During T3-T5: SNR_SSB q_0: -12 dB SNR_SSB q_1: 20.2 dB In signaling: rsrp-ThresholdSSB: -95 dBm/120kHz for Config 1,2 rsrp-ThresholdSSB: -92 dBm/240kHz for Config 3,4	 +8.70 dB 0 dB +8.70 dB 0 dB 0 dB -0.2 dB -14 dB -14 dB	During T1: SNR_SSB q_0: 13.7 dB SNR_SSB q_1: 0.2 dB During T2: SNR_SSB q_0: 5.7 dB SNR_SSB q_1: 0.2 dB During T3-T5: SNR_SSB q_0: -12 dB SNR_SSB q_1: 20 dB In signaling: rsrp-ThresholdSSB: -109 dBm/120kHz for Config 1,2 srp-ThresholdSSB: -106 dBm/240kHz for Config 3,4
5.5.5.2 EN-DC FR2 SSB-based beam failure detection and link recovery in DRX	Same as 5.5.5.1	Same as 5.5.5.1	Same as 5.5.5.1
5.5.5.3 EN-DC FR2 CSI-RS-based beam failure detection and link recovery in non-DRX	Noc = -104.7 dBm/120 kHz $\hat{E}s_2$ / N_{oc} for CSI-RS set q0 T1: 5 dB T2: -3 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}s_2$ / N_{oc} for CSI-RS set q1 T1: 0.2 dB T2: 0.2 dB T3: 20.2 dB T4: 20.2 dB T5: 20.2 dB rsrp-ThresholdSSB: -95 dBm/SCS kHz	0 dB 8.7 dB 8.7 dB 0 dB 0 dB 0 dB 0 dB 0 dB -0.2 dB -0.2 dB -0.2 dB -14 dB	Noc = -104.7 dBm/120 kHz $\hat{E}s_2$ / N_{oc} for CSI-RS set q0 T1: 13.7 dB T2: 5.7 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}s_2$ / N_{oc} for CSI-RS set q1 T1: 0.2 dB T2: 0.2 dB T3: 20 dB T4: 20 dB T5: 20 dB rsrp-ThresholdSSB: -109.0 dBm/SCS kHz
5.5.5.4 EN-DC FR2 CSI-RS-based beam failure detection and link recovery in DRX	Same as 5.5.5.3	Same as 5.5.5.3	Same as 5.5.5.3

5.5.5.5 EN-DC FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX	Same as 5.5.5.1	Same as 5.5.5.1	Same as 5.5.5.1
5.5.5.6 EN-DC FR2 SCell CSI-RS-based beam failure detection and link recovery in non-DRX	Noc = -104.7 dBm/120 kHz $\hat{E}_{s3}$ / N_{oc} for CSI-RS set q0 T1: 5 dB T2: -3 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}_{s3}$ / N_{oc} for CSI-RS set q1 T1: 0.2 dB T2: 0.2 dB T3: 20.2 dB T4: 20.2 dB T5: 20.2 dB rsrp-ThresholdBFR: -95 dBm/SCS kHz	0 dB 8.7 dB 8.7 dB 0 dB 0 dB 0 dB 0 dB 0 dB -0.2 dB -0.2 dB -0.2 dB -14 dB	Noc = -104.7 dBm/120 kHz $\hat{E}_{s3}$ / N_{oc} for CSI-RS set q0 T1: 13.7 dB T2: 5.7 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}_{s3}$ / N_{oc} for CSI-RS set q1 T1: 0.2 dB T2: 0.2 dB T3: 20 dB T4: 20 dB T5: 20 dB rsrp-ThresholdBFR: -109.0 dBm/SCS kHz
5.5.5.7 EN-DC FR2 SCell CSI-RS-based beam failure detection and link recovery in DRX	Same as 5.5.5.6	Same as 5.5.5.6	Same as 5.5.5.6
5.5.5.8 EN-DC FR2 PSCell CSI-RS-based TRP specific Beam Failure Detection and Link Recovery in DRX mode	Noc = -104.7 dBm/120 kHz $\hat{E}_{s3}$ / N_{oc} for CSI-RS set q0,0 T1: 5 dB T2: -3 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}_{s3}$ / N_{oc} for CSI-RS set q0,1: T1-T5: 5 dB $\hat{E}_{s3}$ / N_{oc} for CSI-RS set q1,0 and q1,1 T1: 0.2 dB T2: 0.2 dB T3: 20.2 dB T4: 20.2 dB T5: 20.2 dB rsrp-ThresholdBFR: -95 dBm/SCS kHz	0 dB q0,0: 8.7 dB 8.7 dB 0 dB 0 dB 0 dB q0,1: 8.7 dB 0 dB 0 dB -0.2 dB -0.2 dB -0.2 dB -14 dB	Noc = -104.7 dBm/120 kHz q0,0: $\hat{E}_{s3}$ / N_{oc} for CSI-RS set q0,0 T1: 13.7 dB T2: 5.7 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}_{s3}$ / N_{oc} for CSI-RS set q0,1 T1-T5: 13.7 dB $\hat{E}_{s3}$ / N_{oc} for CSI-RS set q1,0 and q1,1 T1: 0.2 dB T2: 0.2 dB T3: 20 dB T4: 20 dB T5: 20 dB rsrp-ThresholdBFR: -109.0 dBm/SCS kHz
5.5.5.9 EN-DC FR2 SSB-based beam failure detection and link recovery in DRX mode for UE fulfilling relaxed measurement criterion	During T1: SNR_SSB q_0: 6 dB SNR_SSB q_1: 0.2 dB During T2: SNR_SSB q_0: 6 dB SNR_SSB q_1: 0.2 dB During T3-T5: SNR_SSB q_0: -12 dB SNR_SSB q_1: 20.2 dB In signaling: rsrp-ThresholdSSB: -95 dBm/120kHz for Config 1,2	 +8.70 dB 0 dB +8.70 dB 0 dB 0 dB -0.2 dB -14 dB -14 dB	During T1: SNR_SSB q_0: 14.70 dB SNR_SSB q_1: 0.2 dB During T2: SNR_SSB q_0: 14.70 dB SNR_SSB q_1: 0.2 dB During T3-T5: SNR_SSB q_0: -12 dB SNR_SSB q_1: 20 dB In signaling: rsrp-ThresholdSSB: -109 dBm/120kHz for Config 1,2

	rsrp-ThresholdSSB: -92 dBm/240kHz for Config 3,4		srp-ThresholdSSB: -106 dBm/240kHz for Config 3,4
5.5.6.2.1 EN-DC FR2 RRC-based DL active BWP switch in non-DRX in synchronous EN-DC	During T1: Noc2: -112dBm/15kHz Ês2 / Iot2: +18dB	During T1: 0dB 0dB	During T1: Noc2: -112dBm/15kHz Ês2 / Iot2: +18dB
5.5.6.3.1 E-UTRAN - NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs in synchronous EN-DC	Same as 5.5.6.2.1	Same as 5.5.6.2.1	Same as 5.5.6.2.1
5.5.7.1 Addition and Release Delay of NR PSCell	During T1: Ês: -infinity During T2: Ês: -81 dBm/120kHz During T3: Ês: -81 dBm/120kHz During T4: Ês: -81 dBm/120kHz	During T1: 0dB During T2: 0dB During T3: 0dB During T4: 0dB	During T1: Ês: -infinity During T2: Ês: -81 dBm/120kHz During T3: Ês: -81 dBm/120kHz During T4: Ês: -81 dBm/120kHz
5.5.9.1.1 EN-DC PSCell FR2 uplink spatial relation switch for a known spatial relation	During T1: Ês / N_{oc}: 1 dB During T2: Ês / N_{oc}: 1 dB During T3: Ês / N_{oc}: -infinity dB During T4: Ês / N_{oc}: 1 dB	During T1: 0 dB During T2: 0 dB During T3: 0 dB During T4: 0 dB	During T1: Ês / N_{oc}: 1 dB During T2: Ês / N_{oc}: 1 dB During T3: Ês / N_{oc}: -infinity dB During T4: Ês / N_{oc}: 1 dB
5.5.9.2.1 EN-DC PSCell FR2 uplink spatial relation switch associated with a known DL-RS	During T1: Ês / N_{oc}: 1 dB During T2: Ês / N_{oc}: 1 dB During T3: Ês / N_{oc}: -infinity dB During T4: Ês / N_{oc}: 1 dB	During T1: 0 dB During T2: 0 dB During T3: 0 dB During T4: 0 dB	During T1: Ês / N_{oc}: 1 dB During T2: Ês / N_{oc}: 1 dB During T3: Ês / N_{oc}: -infinity dB During T4: Ês / N_{oc}: 1 dB
5.5.12.1 EN-DC FR2 PSCell activation and deactivation delay	During T1: Ês2: - Infinity During T2-T4: Ês2: -81 dBm/120kHz	During T1: 0dB During T2-T4: 0dB	During T1: Ês2: - Infinity During T2-T4: Ês2: -81 dBm/120kHz
5.5.13.1 EN-DC FR2 Addition and Release Delay of NR PSCell	During T1: Ês: -infinity During T2~T4: Ês: -81dBm/SCS	During T1: 0dB During T2~T4: 0dB	During T1: Ês: -infinity During T2~T4: Ês: -81dBm/SCS
5.6.1.1 EN-DC FR2 event-triggered reporting without gap in non-DRX	During T1: Ês2: -86dBm/120kHz Ês3: -infinity During T2: Ês2: -86dBm/120kHz Ês3: -86dBm/120kHz	During T1: 0dB 0dB During T2: 0dB 0dB	During T1: Ês2: -86dBm/120kHz Ês3: -infinity During T2: Ês2: -86dBm/120kHz Ês3: -86dBm/120kHz
5.6.1.2 EN-DC FR2 event-triggered reporting without gap in DRX	During T1: Noc: -98dBm/15kHz Ês2 / Noc: +4.00dB Ês3 / Noc: -infinity	During T1: -3.5dB 0dB 0dB	During T1: Noc: -101.5dBm/15kHz Ês2 / Noc: +4.00dB Ês3 / Noc: -infinity

	During T2: Noc: -98dBm/15kHz Ês2 / Noc: +4.00dB Ês3 / Noc: +4.00dB Signalled A3-offset: -6.0	During T2: -3.5dB 0dB 0dB Signalled A3-offset: -1.0	During T2: Noc: -101.5dBm/15kHz Ês2 / Noc: +4.00dB Ês3 / Noc: +4.00dB Signalled A3-offset: -7.0
5.6.1.3 EN-DC FR2 event-triggered reporting with gap in non-DRX	Same as 5.6.1.1	Same as 5.6.1.1	Same as 5.6.1.1
5.6.1.4 EN-DC FR2 event-triggered reporting with gap in DRX	Same as 5.6.1.2	Same as 5.6.1.2	Same as 5.6.1.2
5.6.2.1 EN-DC FR2-FR2 event-triggered reporting in non-DRX	During T1: Ês1: -87 dBm/120kHz Ês2: - infinity During T2: Ês1: -87 dBm/120kHz Ês2: -87 dBm/120kHz	During T1: 0dB 0dB During T2: 0dB 0dB	During T1: Ês1: -87 dBm/120kHz Ês2: -- infinity During T2: Ês1: -87 dBm/120kHz Ês2: -87 dBm/120kHz
5.6.2.2 EN-DC FR2-FR2 event-triggered reporting in DRX	During T1: Noc: -104.70dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: -infinity During T2: Noc: -104.70dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: +9.00dB Signalled A3-offset: -6.0	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB Signalled A3-offset: -6.0	During T1: Noc: -104.70dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: -infinity During T2: Noc: -104.70dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: +9.00dB Signalled A3-offset: -12.0
5.6.2.3 EN-DC FR2-FR2 event-triggered reporting in non-DRX with SSB time index detection	Same as 5.6.2.1	Same as 5.6.2.1	Same as 5.6.2.1
5.6.2.4 EN-DC FR2-FR2 event-triggered reporting in DRX with SSB time index detection	Same as 5.6.2.2	Same as 5.6.2.2	Same as 5.6.2.2
5.6.2.5 EN-DC FR1-FR2 event-triggered reporting in non-DRX	During T1: Ês2: - Infinity During T2: Ês2: -87 dBm/120kHz	During T1: 0dB During T2: 0dB	During T1: Ês2: - Infinity During T2: Ês2: -87 dBm/120kHz
5.6.2.6 EN-DC FR1-FR2 event-triggered reporting in DRX	During T1: Noc = -104.7 dBm/15 kHz Ês2 / Noc = - Infinity During T2: Noc = -104.7 dBm/15 kHz Ês2 / Noc = 9 dB	During T1: 0dB 0dB During T2: 0dB 0dB	During T1: Noc = -104.7 dBm/15 kHz Ês2 / Noc = - Infinity During T2: Noc = -104.7 dBm/15 kHz Ês2 / Noc = 9 dB
5.6.2.7 EN-DC FR1-FR2 event-triggered reporting in non-DRX with SSB time index detection	Same as 5.6.2.5	Same as 5.6.2.5	Same as 5.6.2.5
5.6.2.8 EN-DC FR1-FR2 event-triggered reporting in DRX with SSB time index detection	Same as 5.6.2.6	Same as 5.6.2.6	Same as 5.6.2.6
5.6.3.1 EN-DC FR2 SSB-based L1-RSRP measurement in non-DRX	During T1: Noc: -105dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: -infinity	During T1: 0dB 0dB 0dB	During T1: Noc: -105dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: -infinity

	During T2: Noc: -105dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: +9.00dB	During T2: 0dB 0dB 0dB	During T2: Noc: -105dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: +9.00dB
5.6.3.2 EN-DC FR2 SSB-based L1-RSRP measurement in DRX	Same as 5.6.3.1	Same as 5.6.3.1	Same as 5.6.3.1
5.6.3.3 EN-DC FR2 CSI-RS-based L1-RSRP measurement in non-DRX	Noc: -105dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +9.00dB Reported CSI-RSRP values ± 29dB Reported Differential CSI-RSRP values ± 7dB	0dB 0dB 0dB Via mapping	Noc: -105dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +9.00dB CSI-RS#1: RSRP_40 to RSRP_99 CSI-RS#0: DIFFRSRP_1 to DIFFRSRP_7
5.6.3.4 EN-DC FR2 CSI-RS-based L1-RSRP measurement in DRX	Same as 5.6.3.3	Same as 5.6.3.3	Same as 5.6.3.3
5.6.4.1 EN-DC FR2 SRS-RSRP measurement in non-DRX	During T1: Noc: -98 dBm/15kHz Neighbour cell UE Es/Noc: -infinity During T2: Noc: -98 dBm/15kHz Neighbour cell UE Es/Noc: 4dB In signalling: i1-threshold: -103dBm/SCS	During T1: -2.5dB 3dB During T2: -2.5dB 3dB -9dB	During T1: Noc: -100.5 dBm/15kHz Neighbour cell UE Es/Noc: -infinity During T2: Noc: -100.5 dBm/15kHz Neighbour cell UE Es/Noc: 7dB i1-threshold: -112dBm/SCS
5.6.6.1 EN-DC FR2 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX	Noc: -105dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +9.00dB Reported CSI-SINR values ± 5.5dB Reported Differential CSI-SINR values ± 4.5dB	0dB 0dB 0dB Via mapping	Noc: -105dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +9.00dB CSI-RS#1: SINR_51 to SINR_74 CSI-RS#0: DIFFSINR_4 to DIFFSINR_13
5.6.6.2 EN-DC FR2 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX	During T1: Noc: -105dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: -infinity During T2: Noc: -105dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: +9.00dB Reported SS-SINR values ± 4.0dB Reported Differential SS-SINR values ± 3.0dB	During T1: 0dB 1.5dB 0dB During T2: 0dB 1.5dB 0dB Via mapping	During T1: Noc: -105dBm/15kHz Ês0 / Noc: +1.50dB Ês1 / Noc: -infinity During T2: Noc: -105dBm/15kHz Ês0 / Noc: +1.50dB Ês1 / Noc: +9.00dB SSB#1: SINR_54 to SINR_71 SSB#0: DIFFSINR_4 to DIFFSINR_10
5.6.6.3 EN-DC FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX	Noc: -105dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +9.00dB Reported CSI-SINR values ± 4.5dB Reported Differential CSI-SINR values ± 3.5dB	0dB 0dB 0dB Via mapping	Noc: -105dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +9.00dB CSI-RS#1: SINR_53 to SINR_72 CSI-RS#0: DIFFSINR_5 to DIFFSINR_12
5.6.8.1 EN-DC event triggered reporting tests for NR FR2 cell when DRX is used	During T1: Noc_1: -104.7 dBm/15kHz Noc_2: -104.7 dBm/15kHz $\hat{E}s_1$ / Noc_1: +6 dB $\hat{E}s_2$ / Noc_2: +6 dB During T2: Noc_1: -104.7 dBm/15kHz Noc_2: -104.7 dBm/15kHz $\hat{E}s_1$ / Noc_1: +6 dB $\hat{E}s_2$ / Noc_2: +6 dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc_1: -104.7 dBm/15kHz Noc_2: -104.7 dBm/15kHz $\hat{E}s_1$ / Noc_1: +6 dB $\hat{E}s_2$ / Noc_2: +6 dB During T2: Noc_1: -104.7 dBm/15kHz Noc_2: -104.7 dBm/15kHz $\hat{E}s_1$ / Noc_1: +6 dB $\hat{E}s_2$ / Noc_2: +6 dB

	In signaling: A3-offset = -6dB	In signaling: 0dB	In signaling: A3-offset = -6dB
5.7.1.1 EN-DC FR2 SS-RSRP measurement accuracy	UE PC1		
	Test 1: Noc: -91.60dBm/15kHz Ês2 / Noc: +6.0dB Ês3 / Noc: +1.0dB Reported absolute RSRP values: ±8dB Reported relative RSRP values: ±6dB For extreme conditions allow ±3dB + FFS MU additionally Test 2: n257 Ês2: -108.2dBm/120kHz n257 Ês3: -108.2dBm/120kHz n260 Ês2: -105.2dBm/120kHz n260 Ês3: -105.2dBm/120kHz Reported absolute RSRP values: ±8dB Reported relative RSRP values: ±6dB For extreme conditions allow ±3dB+ FFS MU additionally	Test 1: -5.80dB 0dB 0.4dB Via Mapping Test 2: 6dB 6dB 6dB 6dB Via Mapping	Test 1: Noc: -97.40dBm/15kHz Ês2 / Noc: +6.0dB Ês3 / Noc: +1.4dB Cell 2: RSRP_61 to RSRP_126 Cell 3: RSRP_56 to RSRP_126 Cell 3: RSRP_x-12 to RSRP_X+2 Test 2: n257 Ês2: -102.2dBm/120kHz n257 Ês3: -102.2dBm/120kHz n260 Ês2: -99.2dBm/120kHz n260 Ês3: -99.2dBm/120kHz Band dependent. See test case tables in clause 5.7.1.1.5
	UE PC3		
	Test 1: Noc: -91.60dBm/15kHz Ês2 / Noc: +6.0dB Ês3 / Noc: +1.0dB Reported absolute RSRP values: ±8dB Reported relative RSRP values: ±6dB For extreme conditions allow ±3dB + FFS MU additionally Test 2: n257 Ês2: -110.0dBm/120kHz n257 Ês3: -110.0dBm/120kHz n260 Ês2: -107.4dBm/120kHz n260 Ês3: -107.4dBm/120kHz Reported absolute RSRP values: ±8dB Reported relative RSRP values: ±6dB For extreme conditions allow ±3dB+ FFS MU additionally	Test 1: -5.80dB 0dB 0.4dB Via Mapping Test 2: 7.70dB 7.70dB 7.70dB 7.70dB Via Mapping	Test 1: Noc: -97.40dBm/15kHz Ês2 / Noc: +6.0dB Ês3 / Noc: +1.4dB Cell 2: RSRP_50 to RSRP_108 Cell 3: RSRP_46 to RSRP_103 Cell 3: RSRP_x-12 to RSRP_X+2 Test 2: n257 Ês2: -102.3dBm/120kHz n257 Ês3: -102.3dBm/120kHz n260 Ês2: -99.7dBm/120kHz n260 Ês3: -99.7dBm/120kHz Band dependent. See test case tables in clause 5.7.1.1.5
5.7.1.2 EN-DC FR2-FR2 SS-RSRP measurement accuracy	Test 1 Config 1: Noc1: -90.60dBm/15kHz Noc2: -90.60dBm/15kHz Ês1 / Noc1: +6.0dB Ês2 / Noc2: +6.0dB Reported absolute RSRP values: ±8.0dB For extreme conditions allow ±3dB+ FFS MU additionally Reported relative RSRP values: ±6.0dB For extreme conditions allow ±3dB+ FFS MU additionally Test 2 Config 1: n257 Noc1: -108.13dBm/15kHz n257 Noc2: -113.13dBm/15kHz n260 Noc1: -105.53dBm/15kHz	Test 1 Config 1: -5.70dB -5.70dB 0dB 0dB Via Mapping Via Mapping Test 2 Config 1: -6.60dB 0dB -6.60dB	Test 1 Config 1: Noc1: -96.30dBm/15kHz Noc2: -96.30dBm /15kHz Ês1 / Noc1: +6.0dB Ês2 / Noc2: +6.0dB Cell 2 n257: RSRP_41 to RSRP_109 n260: RSRP_39 to RSRP_109 Cell 3: RSRP_52 to RSRP_109 Cell 3: n257: RSRP_x-23 to RSRP_x+26 n260: RSRP_x-23 to RSRP_x+27 Test 2 Config 1: -114.73dBm/15kHz -113.13dBm/15kHz -112.13dBm/15kHz

	n260 Noc2: -110.53dBm/15kHz Ês1 / Noc1: 17.0dB Ês2 / Noc2: -1.0dB Reported absolute RSRP values: ±8.0dB For extreme conditions allow ±3dB+ FFS MU additionally Reported relative RSRP values: ±6.0dB For extreme conditions allow ±3dB+ FFS MU additionally Test 1 Config 2: Noc1: -93.70dBm/15kHz Noc2: -93.70dBm/15kHz Ês1 / Noc1: +6.0dB Ês2 / Noc2: +6.0dB Reported absolute RSRP values: ±8.0dB For extreme conditions allow ±3dB+ FFS MU additionally Reported relative RSRP values: ±6.0dB For extreme conditions allow ±3dB+ FFS MU additionally Test 2 Config 2: n257 Noc1: -108.13dBm/15kHz n257 Noc2: -113.13dBm/15kHz n260 Noc1: -105.53dBm/15kHz n260 Noc2: -110.53dBm/15kHz Ês1 / Noc1: 17.0dB Ês2 / Noc2: -1.0dB Reported absolute RSRP values: ±8.0dB For extreme conditions allow ±3dB+ FFS MU additionally Reported relative RSRP values: ±6.0dB For extreme conditions allow ±3dB+ FFS MU additionally	0dB 0dB 2dB Via Mapping Via Mapping Test 1 Config 2: -5.60dB -5.60dB 0dB 0dB Via Mapping Via Mapping Test 2 Config 2: -6.60dB 0dB -6.60dB 0dB 0dB 2dB Via Mapping Via Mapping	-110.53dBm/15kHz Ês1 / Noc1: 17.0dB Ês2 / Noc2: 1.0dB Cell 2 n257: RSRP_33 to RSRP_101 n260: RSRP_34 to RSRP_104 Cell 3: n257: RSRP_32 to RSRP_87 n260: RSRP_34 to RSRP_90 Cell 3: n257: RSRP_x-37 to RSRP_x+17 n260: RSRP_x-37 to RSRP_x+19 Test 1 Config 2: Noc1: -99.30dBm/15kHz Noc2: -99.30dBm /15kHz Ês1 / Noc1: +6.0dB Ês2 / Noc2: +6.0dB Cell 12 n257: RSRP_41 to RSRP_109 n260: RSRP_39 to RSRP_109 Cell 3: RSRP_52 to RSRP_109 Cell 3: n257: RSRP_x-23 to RSRP_x+26 n260: RSRP_x-23 to RSRP_x+27 Test 2 Config 2: -114.73dBm/15kHz -113.13dBm/15kHz -112.13dBm/15kHz -110.53dBm/15kHz Ês1 / Noc1: 17.0dB Ês2 / Noc2: 1.0dB Cell 2 n257: RSRP_36 to RSRP_104 n260: RSRP_37 to RSRP_107 Cell 3: n257: RSRP_35 to RSRP_90 n260: RSRP_37 to RSRP_93 Cell 3: n257: RSRP_x-37 to RSRP_x+17 n260: RSRP_x-37 to RSRP_x+19
5.7.1.3 EN-DC FR1-FR2 SS-RSRP measurement accuracy	Test 1: Noc: -90dBm/15kHz Ês3 / Noc: +5.0dB Reported absolute RSRP values: ±8dB For extreme conditions allow ±3dB + FFS MU additionally Test 2: n257 Ês3: -98.2dBm/120kHz n260 Ês3: -93.9dBm/120kHz Reported absolute RSRP values: ±8dBFor extreme conditions allow ±3dB+ FFS MU additionally	Test 1: -5.50dB 0dB Via Mapping Test 2: 5.50dB 5.50dB Via Mapping	Test 1: Noc: -95.50dBm/15kHz Ês3 / Noc: +5dB Band dependent. See test case tables in clause 5.7.1.3.5 Test 2: n257 Ês3: -92.7dBm/120kHz n260 Ês3: -88.4dBm/120kHz Band dependent. See test case tables in clause 5.7.1.3.5

5.7.2.1 EN-DC FR2 SS-RSRQ measurement accuracy	Test 1: Noc: -95.0dBm/15kHz Ês2 / Noc: +3.0dB Ês3 / Noc: +3.0dB Reported absolute RSRQ values: ±2.5dB For extreme conditions allow ±1.5dB+ FFS MU additionally Test 2: Noc: -95.0dBm/15kHz Ês2 / Noc: -3.0dB Ês3 / Noc: -3.0dB Reported absolute RSRQ values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally	Test 1: -5.70dB 0dB 0dB Via Mapping Test 2: -1.70dB 0dB 0dB Via Mapping	Test 1: Noc: -100.70dBm/15kHz Ês2 / Noc: +3.0dB Ês3 / Noc: +3.0dB Cell 3: All bands: RSRQ_41 to RSRQ_73 Test 2: Noc: -96.70dBm/15kHz Ês2 / Noc: -3.0dB Ês3 / Noc: -3.0dB Cell 3: n257, n258, n261: RSRQ_35 to RSRQ_71 n260: RSRQ_34 to RSRQ_71
5.7.2.2 EN-DC FR2-FR2 SS-RSRQ measurement accuracy	Test 1: Noc1: -94.03dBm/15kHz Noc2: -94.03dBm/15kHz Ês1 / Noc1: -1.75dB Ês2 / Noc2: -1.75dB Reported absolute RSRQ values: ±2.5dB For extreme conditions allow ±1.5dB+ FFS MU additionally Reported relative RSRQ values: ±3.0dB For extreme conditions allow ±1.0dB+ FFS MU additionally Test 2: Noc1: -94.03dBm/15kHz Noc2: -94.03dBm/15kHz Ês1 / Noc1: -3.0dB Ês2 / Noc2: -3.0dB Reported absolute RSRQ values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally Reported relative RSRQ values: ±4.0dB For extreme conditions allow ±0.0dB+ FFS MU additionally	Test 1: -1.90dB -1.90dB 0dB 0dB Via Mapping Via Mapping Test 2: -1.41dB -1.41dB 0dB 0dB Via Mapping Via Mapping	Test 1: Noc1: -95.93dBm/15kHz Noc2: -95.93dBm /15kHz Ês1 / Noc1: -1.75dB Ês2 / Noc2: -1.75dB Cell 2 and Cell 3: RSRQ_41 to RSRQ_73 Cell 3: RSRQ_x-7 to RSRQ_x+7 Test 2: Noc1: -95.44dBm/15kHz Noc2: -95.44dBm /15kHz Ês1 / Noc1: -3.0dB Ês2 / Noc2: -3.0dB Cell 2 and Cell 3: RSRQ_37 to RSRQ_74 Cell 3: RSRQ_x-9 to RSRQ_x+9
5.7.3.1 EN-DC FR2 SS-SINR measurement accuracy	Test 1: Noc: -105.0dBm/15kHz Ês2 / Noc: +4.54dB Ês3 / Noc: +2.66dB Reported absolute SINR values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally Test 2: Noc: -105.0dBm/15kHz Ês2 / Noc: -3.0dB Ês3 / Noc: -3.0dB Reported absolute SINR values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally	Test 1: 0dB 0dB 0dB Via Mapping Test 2: 0dB 0.2dB 0.2dB Via Mapping	Test 1: Noc: -105.0dBm/15kHz Ês2 / Noc: +4.54dB Ês3 / Noc: +2.66dB Cell 3: n257, n258, n261: SINR_22 to RSRQ_58 n260: SINR_21 to RSRQ_58 Test 2: Noc: -105.0dBm/15kHz Ês2 / Noc: -2.8dB Ês3 / Noc: -2.8dB Cell 3: n257, n258, n261: SINR_18 to RSRQ_55 n260: SINR_18 to RSRQ_54
5.7.3.2 EN-DC FR2-FR2 SS-SINR measurement accuracy	Test 1: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -0.5dB Ês2 / Noc2: -0.5dB Reported absolute SINR values: ±3.0dB For extreme conditions allow ±1.0dB+ FFS MU additionally Reported absolute SINR values: ±3.5dB	Test 1: 0dB 0dB 0dB 0dB Via Mapping Via Mapping	Test 1: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -0.5dB Ês2 / Noc2: -0.5dB Cell 2 and Cell 3: n257, n258, n261: SINR_27 to SINR_62 n260: SINR_27 to SINR_61 Cell 3: SINR_x-8 to SINR_x+8

	For extreme conditions allow ±0.5dB+ FFS MU additionally Test 2: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: +11.0dB Ês2 / Noc2: +11.0dB Reported absolute SINR values: ±3.0dB For extreme conditions allow ±1.0dB+ FFS MU additionally Reported absolute SINR values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally Test 3: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -3.0dB Ês2 / Noc2: -3.0dB Reported absolute SINR values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally Reported absolute SINR values: ±4.0dB For extreme conditions allow ±0.0dB+ FFS MU additionally	 Test 2: -0.1dB -0.1dB 0dB 0dB Via Mapping Via Mapping Test 3: 0dB 0dB 0.9dB 0.9dB Via Mapping Via Mapping	 Test 2: Noc1: -105.1dBm/15kHz Noc2: -105.1dBm/15kHz Ês1 / Noc1: +11.0dB Ês2 / Noc2: +11.0dB Cell 2 and Cell 3: n257, n258, n261: SINR_48 to SINR_87 n260: SINR_48 to SINR_86 Cell 3: SINR_x-17 to SINR_x+17 Test 3: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -2.1dB Ês2 / Noc2: -2.1dB Cell 2 and Cell 3: n257, n258, n261: SINR_23 to SINR_60 n260: SINR_22 to SINR_59 Cell 3: SINR_x-9 to SINR_x+9
5.7.4.1 EN-DC FR2 SSB based L1-RSRP measurement accuracy	Test 1: Noc: -100dBm/15kHz SSB#0 Ês / Noc: +10.0dB SSB#1 Ês / Noc: -2.0dB Reported absolute RSRP values: ±8.5dB Reported relative RSRP values: ±6.5dB For extreme conditions allow ±3dB + FFS MU additionally Test 2: n257 SSB#0 Ês: -108.1dBm/120kHz n257 SSB#1 Ês: -105.5dBm/120kHz n260 SSB#0 Ês: -108.1dBm/120kHz n260 SSB#1 Ês: -105.5dBm/120kHz Reported absolute RSRP values: -6.5 +8.5dB Reported relative RSRP values: ±6.5dB For extreme conditions allow ±3dB+ FFS MU additionally	Test 1: -4.1dB 0dB 0.4dB Test 2: 5.7dB	Test 1: Noc: -104.1dBm/15kHz SSB#0 Ês / Noc: +10.0dB SSB#1 Ês / Noc: -1.6dB SSB#0: RSRP_42 to RSRP_101 SSB#1: RSRP_31 to RSRP_89 SSB#1-SSB#0: -9 to -2 Test 2: n257 SSB#0 Ês: -102.4dBm/120kHz n257 SSB#1 Ês: -99.8dBm/120kHz n260 SSB#0 Ês: -102.4dBm/120kHz n260 SSB#1 Ês: -99.8dBm/120kHz SSB#0 and SSB#1 n257: RSRP_27 to RSRP_83 n260: RSRP_30 to RSRP_86 SSB#1-SSB#0: -4 to +4
5.7.4.2 EN-DC FR2 CSI-RS based L1-RSRP measurement accuracy	Test 1: Noc: -100dBm/15kHz CSI-RS#0 Ês / Noc: +10.0dB CSI-RS#1 Ês / Noc: -2.0dB Reported absolute RSRP values: ±8.5dB Reported relative RSRP values: ±6.5dB For extreme conditions allow ±3dB + FFS MU additionally Test 2: n257 CSI-RS#0 Ês: -108.1dBm/120kHz n257 CSI-RS#1 Ês: -105.5dBm/120kHz	Test 1: -4.1dB 0dB 0.2dB Test 2: 5.7dB	Test 1: Noc: -104.1dBm/15kHz CSI-RS#0 Ês / Noc: +10.0dB CSI-RS#1 Ês / Noc: -1.8dB CSI-RS#0: RSRP_42 to RSRP_101 CSI-RS#1: RSRP_30 to RSRP_89 CSI-RS#1-CSI-RS#0: -9 to -2 Test 2: n257 CSI-RS#0 Ês: -102.4dBm/120kHz

	n260 CSI-RS#0 Ês: -108.1dBm/120kHz n260 CSI-RS#1 Ês: -105.5dBm/120kHz Reported absolute RSRP values: -6.5 +8.5dB Reported relative RSRP values: ±6.5dB For extreme conditions allow ±3dB+ FFS MU additionally		n257 CSI-RS#1 Ês: -99.8dBm/120kHz n260 CSI-RS#0 Ês: -102.4dBm/120kHz n260 CSI-RS#1 Ês: -99.8dBm/120kHz CSI-RS#0 and CSI-RS#1 n257: RSRP_27 to RSRP_83 n260: RSRP_30 to RSRP_86 CSI-RS#1-CSI-RS#0: -4 to +4
5.7.5.1 EN-DC FR2 SRS-RSRP measurement accuracy	During T1: Noc: -100 dBm/15kHz SRS Es/Noc: 2dB During T2: Noc: -100 dBm/15kHz Reported absolute SRS-RSRP values: -89 ± 11.5dB	During T1: 0dB 0dB During T2: 0dB Via mapping	During T1: Noc: -100 dBm/15kHz SRS Es/Noc: 2dB During T2: Noc: -100 dBm/15kHz Reported SRS-RSRP range n257: SRS_RSRP_50 to SRS_RSRP_85 n260: SRS_RSRP_50 to SRS_RSRP_85
5.7.6.1 EN-DC FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	Test 1: Noc: -100dBm/15kHz CSI-RS#0 Ês / Noc: +10.0dB CSI-RS#1 Ês / Noc: -2.0dB Reported absolute SINR values: ±5.5dB Reported relative SINR values: ±4.5dB For extreme conditions allow ±1dB + FFS MU additionally	Test 1: -4.1dB 0dB 0.2dB	Test 1: Noc: -104.1dBm/15kHz CSI-RS#0 Ês / Noc: +10.0dB CSI-RS#1 Ês / Noc: -1.8dB CSI-RS#0: SINR_53 to SINR_76 CSI-RS#1-CSI-RS#0: 6 to 15
5.7.6.2 EN-DC FR2 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy	Test 1: Noc: -100dBm/15kHz SSB#0 Ês / Noc: +10.0dB SSB#1 Ês / Noc: 0.0dB CSI-RS#0 Ês / Noc: +10.0dB CSI-RS#1 Ês / Noc: 0.0dB Reported absolute SINR values: ±4dB Reported relative SINR values: ±3dB For extreme conditions allow ±1dB + FFS MU additionally	Test 1: -4.1dB 0dB 0.2dB 0dB 0.2dB	Test 1: Noc: -104.1dBm/15kHz SSB#0 Ês / Noc: +10.0dB SSB#1 Ês / Noc: 1.2dB CSI-RS#0 Ês / Noc: +10.0dB CSI-RS#1 Ês / Noc: 1.2dB SSB#0: SINR_56 to SINR_73 SSB#1-SSB#0: 5 to 12
5.7.6.3 EN-DC FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	Test 1: Noc: -100dBm/15kHz CSI-RS#0 Ês / Noc: +10.0dB CSI-RS#1 Ês / Noc: -2.0dB Reported absolute SINR values: ±4.5dB Reported relative SINR values: ±3.5dB For extreme conditions allow ±1dB + FFS MU additionally	Test 1: -4.1dB 0dB 0.2dB	Test 1: Noc: -104.1dBm/15kHz CSI-RS#0 Ês / Noc: +10.0dB CSI-RS#1 Ês / Noc: -1.8dB CSI-RS#0: SINR_55 to SINR_74 CSI-RS#1-CSI-RS#0: 7 to 15
5.7.7.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	Test 1: Noc: -91.60dBm/15kHz Ês2 / Noc: +6.0dB Ês3 / Noc: +1.0dB Reported absolute RSRP values: ±8dB Reported relative RSRP values: ±6dB For extreme conditions allow ±3dB + FFS MU additionally Test 2: n257 Ês2: -110.0dBm/120kHz n257 Ês3: -110.0dBm/120kHz n260 Ês2: -107.4dBm/120kHz n260 Ês3: -107.4dBm/120kHz Reported absolute RSRP values: ±8dB	Test 1: -5.80dB 0dB 0.4dB Via Mapping Test 2: 7.70dB 7.70dB 7.70dB 7.70dB Via Mapping	Test 1: Noc: -97.40dBm/15kHz Ês2 / Noc: +6.0dB Ês3 / Noc: +1.4dB Cell 2: RSRP_50 to RSRP_108 Cell 3: RSRP_46 to RSRP_103 Cell 3: RSRP_x-12 to RSRP_X+2 Test 2: n257 Ês2: -102.3dBm/120kHz n257 Ês3: -102.3dBm/120kHz n260 Ês2: -99.7dBm/120kHz n260 Ês3: -99.7dBm/120kHz Band dependent. See test case tables in clause 5.7.7.1.5

	Reported relative RSRP values: ±6dB For extreme conditions allow ±3dB+ FFS MU additionally		
5.7.7.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	Test 1: Noc1: -90.60dBm/15kHz Noc2: -90.60dBm/15kHz Ês1 / Noc1: +6.0dB Ês2 / Noc2: +6.0dB Reported absolute RSRP values: ±8.0dB For extreme conditions allow ±3dB+ FFS MU additionally Reported relative RSRP values: ±6.0dB For extreme conditions allow ±3dB+ FFS MU additionally Test 2: n257 Noc1: -108.13dBm/15kHz n257 Noc2: -113.13dBm/15kHz n260 Noc1: -105.53dBm/15kHz n260 Noc2: -110.53dBm/15kHz Ês1 / Noc1: 17.0dB Ês2 / Noc2: -1.0dB Reported absolute RSRP values: ±8.0dB For extreme conditions allow ±3dB+ FFS MU additionally Reported relative RSRP values: ±6.0dB For extreme conditions allow ±3dB+ FFS MU additionally	Test 1: -5.70dB -5.70dB 0dB 0dB Via Mapping Via Mapping Test 2: -6.60dB 0dB -6.60dB 0dB 0dB 2dB Via Mapping Via Mapping	Test 1: Noc1: -96.30dBm/15kHz Noc2: -96.30dBm /15kHz Ês1 / Noc1: +6.0dB Ês2 / Noc2: +6.0dB Cell 2 n257: RSRP_41 to RSRP_109 n260: RSRP_39 to RSRP_109 Cell 3: RSRP_52 to RSRP_109 Cell 3: n257: RSRP_x-23 to RSRP_x+26 n260: RSRP_x-23 to RSRP_x+27 Test 2: -114.73dBm/15kHz -113.13dBm/15kHz -112.13dBm/15kHz -110.53dBm/15kHz Ês1 / Noc1: 17.0dB Ês2 / Noc2: 1.0dB Cell 2 n257: RSRP_33 to RSRP_101 n260: RSRP_34 to RSRP_104 Cell 3: n257: RSRP_32 to RSRP_87 n260: RSRP_34 to RSRP_90 Cell 3: n257: RSRP_x-37 to RSRP_x+17 n260: RSRP_x-37 to RSRP_x+19
5.7.8.1 EN-DC intra-frequency FR2 CSI-RSRQ measurement accuracy	Test 1: Noc: -95.0dBm/15kHz Ês1 / Noc: +3.0dB Ês2 / Noc: +3.0dB Reported absolute RSRQ values: ±2.5dB Test 2: Noc: -95.0dBm/15kHz Ês1 / Noc: -3.0dB Ês2 / Noc: -3.0dB Reported absolute RSRQ values: ±3.5dB	Test 1: -5.70dB 0dB 0dB Via Mapping Test 2: -1.70dB 0dB 0dB Via Mapping	Test 1: Noc: -100.70dBm/15kHz Ês1 / Noc: +3.0dB Ês2 / Noc: +3.0dB Cell 3: n257, n258, n261: RSRQ_52 to RSRQ 62 n260: RSRQ_51 to RSRQ_62 Test 2: Noc: -96.70dBm/15kHz Ês1 / Noc: -3.0dB Ês2 / Noc: -3.0dB Cell 3: All bands: RSRQ_46 to RSRQ_60
5.7.8.2 EN-DC inter frequency FR2 CSI-RSRQ measurement accuracy	Test 1: Noc1: -94.03dBm/15kHz Noc2: -94.03dBm/15kHz Ês1 / Noc1: -1.75dB Ês2 / Noc2: -1.75dB Reported absolute RSRQ values: ±2.5dB	Test 1: -1.90dB -1.90dB 0dB 0dB Via Mapping	Test 1: Noc1: -95.93dBm/15kHz Noc2: -95.93dBm/15kHz Ês1 / Noc1: -1.75dB Ês2 / Noc2: -1.75dB Cell 2: All bands: RSRQ_52 to RSRQ_62 Cell 3: All bands: RSRQ_52 to RSRQ_62

	Reported relative RSRQ values: ±3dB Test 2: Noc1: -94.03dBm/15kHz Noc2: -94.03dBm/15kHz Ês1 / Noc1: -3.0dB Ês2 / Noc2: -3.0dB Reported absolute RSRQ values: ±3.5dB Reported relative RSRQ values: ±4dB	Via Mapping Test 2: -1.41dB -1.41dB 0dB 0dB Via Mapping Via Mapping	Cell 3: RSRQ_x-7 to RSRQ_x+7 Test 2: Noc1: -95.44dBm/15kHz Noc2: -95.44dBm/15kHz Ês1 / Noc1: -3.0dB Ês2 / Noc2: -3.0dB Cell 2: n257, n258, n261: RSRQ_48 to RSRQ_63 n260: RSRQ_48 to RSRQ_62 Cell 3: n257, n258, n261: RSRQ_48 to RSRQ_63 n260: RSRQ_48 to RSRQ_62 Cell 3: RSRQ_x-9 to RSRQ_x+9
5.7.9.1 EN-DC intra-frequency FR2 CSI-SINR measurement accuracy	Test 1: Noc: -105.0dBm/15kHz Ês1 / Noc: +4.54dB Ês2 / Noc: +2.66dB Reported absolute SINR values: ±3dB Test 2: Noc: -105.0dBm/15kHz Ês1 / Noc: -3.0dB Ês2 / Noc: -3.0dB Reported absolute SINR values: ±3.5dB	Test 1: 0dB 0dB 0dB Via Mapping Test 2: 0dB 0.2dB 0.2dB Via Mapping	Test 1: Noc: -105.0dBm/15kHz Ês1 / Noc: +4.54dB Ês2 / Noc: +2.66dB Cell 3: All bands: SINR_32 to SINR_48 Test 2: Noc: -1050dBm/15kHz Ês1 / Noc: -2.8dB Ês2 / Noc: -2.8dB Cell 3: n257, n258, n261: SINR_29 to SINR_45 n260: SINR_28 to SINR_45
5.7.9.2 EN-DC inter frequency FR2 CSI-SINR measurement accuracy	Test 1: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -0.5dB Ês2 / Noc2: -0.5dB Reported absolute SINR values: ±3dB Reported relative SINR values: ±3.5dB Test 2: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: +11.0dB Ês2 / Noc2: +11.0dB Reported absolute SINR values: ±3dB	Test 1: 0dB 0dB 0dB 0dB Via Mapping Via Mapping Test 2: -0.1dB -0.1dB 0dB 0dB Via Mapping	Test 1: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -0.5dB Ês2 / Noc2: -0.5dB Absolute accuracy: Cell 2: n257, n258, n261: SINR_37 to SINR_52 n260: SINR_36 to SINR_52 Cell 3: n257, n258, n261: SINR_37 to SINR_52 n260: SINR_36 to SINR_52 Cell 3: SINR_x-8 to SINR_x+8 Test 2: Noc1: -105.1dBm/15kHz Noc2: -105.1dBm/15kHz Ês1 / Noc1: 11dB Ês2 / Noc2: 11dB Cell 2: n257, n258, n261: SINR_54 to SINR_81 n260: SINR_54 to SINR_80

			Cell 3: n257, n258, n261: SINR_54 to SINR_81 n260: SINR_54 to SINR_80
	Reported relative RSRQ values: ±3.5dB	Via Mapping	Cell 3: SINR_x-17 to SINR_x+17
	Test 3: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -3.0dB Ês2 / Noc2: -3.0dB Reported absolute SINR values: ±3.5dB	Test 3: 0dB 0dB 0.9dB 0.9dB Via Mapping	Test 3: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -2.1dB Ês2 / Noc2: -2.1dB Cell 2: n257, n258, n261: SINR_33 to SINR_50 n260: SINR_32 to SINR_50 Cell 3: n257, n258, n261: SINR_33 to SINR_50 n260: SINR_32 to SINR_50
	Reported relative SINR values: ±4dB	Via Mapping	Cell 3: SINR_x-9 to SINR_x+9

Table F.1.3.2-4: Derivation of test requirements for NR SA FR2 RRM tests

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
7.1.1.1 NR SA FR2 cell re-selection	UE PC1		
	During T1: Noc = -102 dBm/15kHz Es_1/Noc = 8dB Es_2/Noc = -infinity During T2: Noc = -102 dBm/15kHz Es_1/Noc = -3dB Es_2/Noc = 1.5dB During T3: Noc = -102 dBm/15kHz Es_1/Noc = 1.5dB Es_2/Noc = -3dB In signalling: SintraSearchP = 50 Qrxlevmin = -138dBm/SCS for config. 1 Qrxlevmin = -135dBm/SCS for config. 2	During T1: 0dB 0dB N/A During T2: 0dB 0.5dB 1.0dB During T3: 0dB 1.0dB 0.5dB In signalling: 12 37 dB 37 dB	During T1: Noc = -102 dBm/15kHz Es_1/Noc = 8dB Es_2/Noc = -infinity During T2: Noc = -102 dBm/15kHz Es_1/Noc = -2.50dB Es_2/Noc = 2.5dB During T3: Noc = -102 dBm/15kHz Es_1/Noc = 2.5dB Es_2/Noc = -2.50dB In signalling: SintraSearchP = 62 Qrxlevmin = -101dBm/SCS for config. 1 Qrxlevmin = -98dBm/SCS for config. 2
	UE PC3		
	During T1: Noc = -102 dBm/15kHz Es_1/Noc = 8dB Es_2/Noc = -infinity During T2: Noc = -102 dBm/15kHz Es_1/Noc = -3dB Es_2/Noc = 1.5dB During T3:	During T1: 0dB 0dB N/A During T2: 0dB 0.1dB 0.55dB During T3:	During T1: Noc = -102 dBm/15kHz Es_1/Noc = 8dB Es_2/Noc = -infinity During T2: Noc = -102 dBm/15kHz Es_1/Noc = -2.90dB Es_2/Noc = 2.05dB During T3:

	Noc = -102 dBm/15kHz Es_1/Noc = 1.5dB Es_2/Noc = -3dB In signalling: Qrxlevmin = -138dBm/SCS for config. 1 Qrxlevmin = -135dBm/SCS for config. 2	0dB 0.55dB 0.1dB In signalling: 18 dB 18 dB	Noc = -102 dBm/15kHz Es_1/Noc = 2.05dB Es_2/Noc = -2.90dB In signalling: Qrxlevmin = -120dBm/SCS for config. 1 Qrxlevmin = -117dBm/SCS for config. 2
7.1.1.2 NR SA FR2-FR2 cell re-selection	During T1: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 10.5dB Es_2/Noc_2 = -10.5dB During T2: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 10.5dB Es_2/Noc_2 = -infinity During T3: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 8dB Es_2/Noc_2 = 8.5dB In signalling: Cell 2 Qrxlevmin = -138dBm/SCS for config. 1 Cell 2 Qrxlevmin = -135dBm/SCS for config. 2 Cell 2 SnonintraSearchP = 50dB Cell 1 Threshx, highP = 48dB Cell 2 Threshserving, lowP = 44dB Cell 2 Threshx, lowP = 50dB	During T1: 0dB 0dB 0dB 7.6dB During T2: 0dB 0dB 0dB N/A During T3: 0dB 0dB 0dB 0dB In signalling: 16 dB 16 dB 12dB -16dB 18dB -32dB	During T1: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 10.5dB Es_2/Noc_2 = -2.9dB During T2: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 10.5dB Es_2/Noc_2 = -infinity During T3: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 8dB Es_2/Noc_2 = 8.5dB In signalling: Qrxlevmin = -124dBm/SCS for config. 1 Qrxlevmin = -121dBm/SCS for config. 2 Cell 2 SnonintraSearchP = 62dB Cell 1 Threshx, highP = 32dB Cell 2 Threshserving, lowP = 62dB Cell 2 Threshx, lowP = 18dB
7.1.1.3 NR SA FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	During T1: Noc = -102 dBm/15kHz Es_1/Noc = -3dB Es_2/Noc = 1.5dB During T2: Noc = -102 dBm/15kHz Es_1/Noc = 1.5dB Es_2/Noc = -3dB In signalling: Qrxlevmin = -140dBm/SCS for config. 1 Qrxlevmin = -137dBm/SCS for config. 2	During T1: 0dB 0.1dB 0.55dB During T2: 0dB 0.55dB 0.1dB In signalling: 20dB 20dB	During T1: Noc = -102 dBm/15kHz Es_1/Noc = -2.90dB Es_2/Noc = 2.05dB During T2: Noc = -102 dBm/15kHz Es_1/Noc = 2.05dB Es_2/Noc = -2.90dB In signalling: Qrxlevmin = -120dBm/SCS for config. 1 Qrxlevmin = -117dBm/SCS for config. 2
7.1.1.4 NR SA FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	During T1: Noc = -102 dBm/15kHz Es_1/Noc = -3dB Es_2/Noc = 1.5dB During T2: Noc = -102 dBm/15kHz Es_1/Noc = 1.5dB Es_2/Noc = -3dB In signalling: Qrxlevmin = -140dBm/SCS for config. 1 Qrxlevmin = -137dBm/SCS for config. 2	During T1: 0dB 0.1dB 0.55dB During T2: 0dB 0.55dB 0.1dB In signalling: 20dB 20dB	During T1: Noc = -102 dBm/15kHz Es_1/Noc = -2.90dB Es_2/Noc = 2.05dB During T2: Noc = -102 dBm/15kHz Es_1/Noc = 2.05dB Es_2/Noc = -2.90dB In signalling: Qrxlevmin = -120dBm/SCS for config. 1 Qrxlevmin = -117dBm/SCS for config. 2

	SsearchThresholdP = 35dB	-27dB	SsearchThresholdP = 8dB
7.1.1.5 NR SA FR2-FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	During T1: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 10.5dB Es_2/Noc_2 = -10.5dB During T2: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 8dB Es_2/Noc_2 = 8.5dB In signalling: Cell 2 Qrxlevmin = -138dBm/SCS for config. 1 Cell 2 Qrxlevmin = -135dBm/SCS for config. 2 Cell 2 SnonintraSearchP = 50dB Cell 1 Threshx, highP = 48dB Cell 2 Threshserving, lowP = 44dB Cell 2 Threshx, lowP = 50dB SSearchDeltaP = 6dB	During T1: 0dB 0dB 0dB 7.6dB During T2: 0dB 0dB 0dB 0dB In signalling: 16 dB 16 dB 12dB -16dB 18dB -32dB 6dB	During T1: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 10.5dB Es_2/Noc_2 = -2.9dB During T2: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 8dB Es_2/Noc_2 = 8.5dB In signalling: Qrxlevmin = -124dBm/SCS for config. 1 Qrxlevmin = -121dBm/SCS for config. 2 Cell 2 SnonintraSearchP = 62dB Cell 1 Threshx, highP = 32dB Cell 2 Threshserving, lowP = 62dB Cell 2 Threshx, lowP = 18dB SSearchDeltaP = 12dB
7.1.1.6 NR SA FR2-FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	During T1: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 10.5dB Es_2/Noc_2 = -10.5dB During T2: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 8dB Es_2/Noc_2 = 8.5dB In signalling: Cell 2 Qrxlevmin = -138dBm/SCS for config. 1 Cell 2 Qrxlevmin = -135dBm/SCS for config. 2 Cell 2 SnonintraSearchP = 50dB Cell 1 Threshx, highP = 48dB Cell 2 Threshserving, lowP = 44dB Cell 2 Threshx, lowP = 50dB Cell 2 SsearchThresholdP = 29dB	During T1: 0dB 0dB 0dB 7.6dB During T2: 0dB 0dB 0dB 0dB In signalling: 16 dB 16 dB 12dB -16dB 18dB -32dB -17dB	During T1: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 10.5dB Es_2/Noc_2 = -2.9dB During T2: Noc_1 = -102 dBm/15kHz Noc_2 = -102 dBm/15kHz Es_1/Noc_1 = 8dB Es_2/Noc_2 = 8.5dB In signalling: Qrxlevmin = -124dBm/SCS for config. 1 Qrxlevmin = -121dBm/SCS for config. 2 Cell 2 SnonintraSearchP = 62dB Cell 1 Threshx, highP = 32dB Cell 2 Threshserving, lowP = 62dB Cell 2 Threshx, lowP = 18dB Cell 2 SsearchThresholdP = 12dB
7.3.1.2 NR SA FR2 Intra-frequency handover; unknown target cell	During T1: Noc: -104.7dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: -infinity During T2: Noc: -104.7dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: +7.00dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB	During T1: Noc: -104.7dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: -infinity During T2: Noc: -104.7dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: +7.00dB
7.3.1.3 NR SA FR2-FR2 Inter-frequency handover; unknown target cell	During T1: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +5.00dB Ês2 / Noc2: -infinity During T2: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB	During T1: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +5.00dB Ês2 / Noc2: -infinity During T2: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz

	Ês1 / Noc1: +5.00dB Ês2 / Noc2: +5.00dB	0dB 0dB	Ês1 / Noc1: +5.00dB Ês2 / Noc2: +5.00dB
7.3.1.4 NR SA FR1-FR2 synchronous DAPS handover	During T1: Noc -104.7dBm/15kHz Es_2/Noc -infinity During T2-T5: Noc -104.7 dBm/15kHz Es_2/Noc 10 dB	During T1: 0 dB 0 dB During T2-T5: 0 dB 0 dB	During T1: Noc -104.7dBm/15kHz Es_2/Noc -infinity During T2-T5: Noc -104.7 dBm/15kHz Es_2/Noc 10 dB
7.3.1.5 NR SA FR1-FR2 asynchronous DAPS handover	Same as 7.3.1.4	Same as 7.3.1.4	Same as 7.3.1.4
7.3.2.1.1 NR SA FR2 RRC re-establishment	During T1: Noc = -104.7 dBm/15 kHz Ês1 / Noc = 4 dB Ês2 / Noc = 2 dB During T2: Noc = -104.7 dBm/15 kHz Ês1 / Noc = - Infinity Ês2 / Noc = 2 dB During T3: Noc = -104.7 dBm/15 kHz Ês1 / Noc = - Infinity Ês2 / Noc = 2 dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB During T3: 0dB 0dB 0dB	During T1: Noc = -104.7 dBm/15 kHz Ês1 / Noc = 4 dB Ês2 / Noc = 2 dB During T2: Noc = -104.7 dBm/15 kHz Ês1 / Noc = - Infinity Ês2 / Noc = 2 dB During T3: Noc = -104.7 dBm/15 kHz Ês1 / Noc = - Infinity Ês2 / Noc = 2 dB
7.3.2.1.2 NR SA FR2 - FR2 RRC re-establishment	During T1: Noc1 = -92.1 dBm/15 kHz Noc2 = -92.1 dBm/15 kHz Ês1 / Noc1 = 0 dB Ês2 / Noc 2= - Infinity During T2: Noc1 = -92.1 dBm/15 kHz Noc2 = -92.1 dBm/15 kHz Ês1 / Noc1 = - Infinity Ês2 / Noc2 = - Infinity During T3: Noc1 = -92.1 dBm/15 kHz Noc2 = -92.1 dBm/15 kHz Ês1 / Noc1 = - Infinity Ês2 / Noc2 = 0 dB	During T1: -0.2dB -0.2dB 0dB 0dB During T2: -0.2dB -0.2dB 0dB 0dB During T3: -0.2dB -0.2dB 0dB 0dB	During T1: Noc1 = -92.3 dBm/15 kHz Noc2 = -92.3 dBm/15 kHz Ês1 / Noc1 = 0 dB Ês2 / Noc 2= - Infinity During T2: Noc1 = -92.3 dBm/15 kHz Noc2 = -92.3 dBm/15 kHz Ês1 / Noc1 = - Infinity Ês2 / Noc2 = - Infinity During T3: Noc1 = -92.3 dBm/15 kHz Noc2 = -92.3 dBm/15 kHz Ês1 / Noc1 = - Infinity Ês2 / Noc2 = 0 dB
7.3.2.1.3NR SA FR2 RRC re-establishment without serving cell timing	During T1: Noc = -104.7 dBm/15 kHz Ês1 / Noc = 5 dB Ês2 / Noc = - infinity During T2: Noc = -104.7 dBm/15 kHz Ês1 / Noc = - Infinity Ês2 / Noc = - infinity During T3: Noc = -104.7 dBm/15 kHz Ês1 / Noc = - Infinity Ês2 / Noc = 5 dB	During T1: 0dB 0dB N/A During T2: 0dB N/A N/A During T3: 0dB N/A 0dB	During T1: Noc = -104.7 dBm/15 kHz Ês1 / Noc = 5 dB Ês2 / Noc = - infinity During T2: Noc = -104.7 dBm/15 kHz Ês1 / Noc = - Infinity Ês2 / Noc = - infinity During T3: Noc = -104.7 dBm/15 kHz Ês1 / Noc = - Infinity Ês2 / Noc = 5 dB
7.3.2.2.1 NR SA FR2 contention based random access	Absolute uplink power: $P_{int} \geq P \geq P_{min}$ ±14.0dB $P_{UMAX} \geq P > P_{int}$ ±12.0dB Relative uplink power step: $P_{int} \geq P \geq P_{min}$ ±6.0dB $P_{UMAX} \geq P > P_{int}$ ±4.0dB Uplink timing: 120kHz SCS T_e ±3.5*64*T_c	Not applicable due to UL calibration FFS dB FFS dB [48]T_c	Absolute uplink power: ±FFSdB Relative uplink power step: ±(6+FFS)dB, either PRACH being compared ≤ (P_{max} – 6dB) ±(4+FFS)dB, both PRACHs being compared > (P_{max} – 6dB)

			Uplink timing: 120kHz SCS T_e ±224±[48]*T_c
7.3.2.2.2 NR SA FR2 non-contention based random access	Same as 7.3.2.2.1	Same as 7.3.2.2.1	Same as 7.3.2.2.1
7.3.2.3.1 NR SA FR2-FR2 RRC connection release with redirection	Same as 7.3.1.3	Same as 7.3.1.3	Same as 7.3.1.3
7.3.3.1 NR SA FR2 conditional handover	During T1: Noc -104.7dBm/15kHz Es_1/Noc 6 dB Es_2/Noc -infinity During T2: Noc -104.7dBm/15kHz Es_1/Noc 6 dB Es_2/Noc 11dB In signaling: A3-offset = -1dB	During T1 -1.5dB 0dB 0dB During T2 -1.5dB 0dB 0dB In signaling: -1dB	During T1: Noc -106.2 dBm/15kHz Es_1/Noc 6 dB Es_2/Noc -infinity During T2: Noc -106.2 dBm/15kHz Es_1/Noc 6 dB Es_2/Noc 11dB In signaling: A3-offset = -2dB
7.4.1.1 SA FR2 UE transmit timing accuracy	Test 1 (no DRX): Uplink timing: ±3*64*T_c for 240 kHz SSB SCS Max step size T_q: 2.5*64*T_c Min adjust rate T_p: 2.5*64*T_c Max adjust rate: 2.5*64*T_c N_{oc} = -112 dBm/15 kHz $\hat{E}s_1$ / N_{oc}: +4.0dB Test 2 (with DRX): Uplink timing: ±3*64*T_c for 240 kHz SSB SCS N_{oc} = -112 dBm/15 kHz $\hat{E}s_1$ / N_{oc}: +4.0dB	 ±0.75*64*T_c +0.625*64T_c -3.725*64*T_c +1.225*64*T_c 0dB 0dB ±0.75*64*T_c 0dB 0dB	Test 1 (no DRX): Uplink timing: ±3.75*64*T_c Max step size T_q: 3.125*64*T_c Min adjust rate: -1.225*64*T_c Max adjust rate: 3.725*64*T_c N_{oc} = -112 dBm/15 kHz $\hat{E}s_1$ / N_{oc}: +4.0dB Test 2 (with DRX): Uplink timing: ±3.75*64*T_c N_{oc} = -112 dBm/15 kHz $\hat{E}s_1$ / N_{oc}: +4.0dB
7.4.1.3 NR SA FR2 UE Transmit Timing Test with 2-TA for FR2 UE supporting multiDCI-IntraCellMultiTRP-TwoTA-r18	Test 1 (no DRX): Uplink timing: ±3*64*Tc for 240 kHz SSB SCS Max step size Tq: 2.5*64*Tc Min adjust rate Tp: 2.5*64*Tc Max adjust rate: 2.5*64*Tc Noc = -112 dBm/15 kHz Ês1 / Noc: +4.0dB Test 2 (no DRX): Uplink timing: ±3*64*Tc for 240 kHz SSB SCS Max step size Tq: 2.5*64*Tc Min adjust rate Tp: 2.5*64*Tc Max adjust rate: 2.5*64*Tc Noc = -112 dBm/15 kHz Ês1 / Noc: +4.0dB Test 3 (with DRX): Uplink timing: ±3*64*Tc for 240 kHz SSB SCS Noc = -112 dBm/15 kHz Ês1 / Noc: +4.0dB Test 4 (with DRX): Uplink timing: ±3*64*Tc for 240 kHz SSB SCS Noc = -112 dBm/15 kHz Ês1 / Noc: +4.0dB	 ±0.75*64*Tc +0.625*64Tc -3.725*64*Tc +1.225*64*Tc 0dB 0dB ±0.75*64*Tc +0.625*64Tc -3.725*64*Tc +1.225*64*Tc 0dB 0dB ±0.75*64*Tc 0dB 0dB ±0.75*64*Tc 0dB 0dB	Test 1 (no DRX): Uplink timing: ±3.75*64*Tc Max step size Tq: 3.125*64*Tc Min adjust rate: -1.225*64*Tc Max adjust rate: 3.725*64*Tc Noc = -112 dBm/15 kHz Ês1 / Noc: +4.0dB Test 2 (no DRX): Uplink timing: ±3.75*64*Tc Max step size Tq: 3.125*64*Tc Min adjust rate: -1.225*64*Tc Max adjust rate: 3.725*64*Tc Noc = -112 dBm/15 kHz Ês1 / Noc: +4.0dB Test 3 (with DRX): Uplink timing: ±3.75*64*Tc Noc = -112 dBm/15 kHz Ês1 / Noc: +4.0dB Test 4 (with DRX): Uplink timing: ±3.75*64*Tc Noc = -112 dBm/15 kHz Ês1 / Noc: +4.0dB
7.4.3.1 NR SA FR2 UE timing advance adjustment accuracy	Noc = -112 dBm/15 kHz Ês1 / Noc = 4 dB UE Timing Advance Adjustment Accuracy for 120kHz SCS = ±32 Tc	0dB 0dB +/- 40 Tc	Noc = -112 dBm/15 kHz Ês1 / Noc = 4 dB UE TAAA for 120kHz SCS = ±72 Tc

7.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode	During T1: Noc: -92.1 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: +2 dB During T2: Noc: -92.1dBm/15kHz Ês1 / Noc: -6 dB Ês2 / Noc: -15 dB During T3: Noc: -92.1dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB	During T1: -2.7 dB 2.1 dB 2.1 dB During T2: -2.7 dB 2.1 dB 0 dB During T3: -2.7 dB 0 dB 0 dB	During T1: Noc: -94.8 dBm/15kHz Ês1 / Noc: +4.1 dB Ês2 / Noc: +4.1 dB During T2: Noc: -94.8 dBm/15kHz Ês1 / Noc: -3.9 dB Ês2 / Noc: -15 dB During T3: Noc: -94.8 dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB
7.5.1.2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode	During T1: Noc: -92.1 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: +2 dB During T2: Noc: -92.1dBm/15kHz Ês1 / Noc: -6 dB Ês2 / Noc: -15 dB During T3: Noc: -92.1dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB During T4: Noc: -92.1dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -4.5 dB During T5: Noc: -92.1dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: +2 dB	During T1: -2.7 dB 2.1 dB 2.1 dB During T2: -2.7 dB 2.1 dB 0 dB During T3: -2.7 dB 0 dB 0 dB During T4: -2.7 dB 0 dB 0 dB During T5: -2.7 dB 0 dB 2.1 dB	During T1: Noc: -94.8 dBm/15kHz Ês1 / Noc: +4.1 dB Ês2 / Noc: +4.1 dB During T2: Noc: -94.8 dBm/15kHz Ês1 / Noc: -3.9 dB Ês2 / Noc: -15 dB During T3: Noc: -94.8 dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB During T4: Noc: -94.8 dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -4.5 dB During T5: Noc: -94.8 dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: +4.1 dB
7.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode	During T1: Noc: -104.7 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: +2 dB During T2: Noc: -104.7 dBm/15kHz Ês1 / Noc: -6 dB Ês2 / Noc: -15 dB During T3: Noc: -104.7 dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB	During T1: 0 dB 1.3 dB 1.3 dB During T2: 0 dB 1.3 dB -0.4 dB During T3: 0 dB -0.4 dB -0.4 dB	During T1: Noc: -104.7 dBm/15kHz Ês1 / Noc: +3.3 dB Ês2 / Noc: +3.3 dB During T2: Noc: -104.7 dBm/15kHz Ês1 / Noc: -4.7 dB Ês2 / Noc: -15.4 dB During T3: Noc: -104.7 dBm/15kHz Ês1 / Noc: -15.4 dB Ês2 / Noc: -15.4 dB
7.5.1.4 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode	During T1: Noc: -104.7 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: +2 dB During T2: Noc: -104.7 dBm/15kHz Ês1 / Noc: -6 dB Ês2 / Noc: -15 dB During T3: Noc: -104.7 dBm/15kHz Ês1 / Noc: -15 dB Ês2 / Noc: -15 dB	During T1: 0 dB 1.3 dB 1.3 dB During T2: 0 dB 1.3 dB -0.4 dB During T3: 0 dB -0.4 dB -0.4 dB	During T1: Noc: -104.7 dBm/15kHz Ês1 / Noc: +3.3 dB Ês2 / Noc: +3.3 dB During T2: Noc: -104.7 dBm/15kHz Ês1 / Noc: -4.7 dB Ês2 / Noc: -15.4 dB During T3: Noc: -104.7 dBm/15kHz Ês1 / Noc: -15.4 dB Ês2 / Noc: -15.4 dB

	During T4: Noc: -104.7 dBm/15kHz Ês1 / Noc: -4.5 dB Ês2 / Noc: -15 dB During T5: Noc: -104.7 dBm/15kHz Ês1 / Noc: +2 dB Ês2 / Noc: -14 dB	During T4: 0 dB -0.4 dB -0.4 dB During T5: 0 dB 1.3 dB -0.4 dB	During T4: Noc: -104.7 dBm/15kHz Ês1 / Noc: -4.9 dB Ês2 / Noc: -15.4 dB During T5: Noc: -104.7 dBm/15kHz Ês1 / Noc: 3.3 dB Ês2 / Noc: -15.4 dB
7.5.1.9 NR SA FR2 radio link monitoring UE scheduling restrictions	Same as 5.5.1.9	Same as 5.5.1.9	Same as 5.5.1.9
7.5.3.4 NR SA FR2 direct SCell activation at SCell addition of known SCell	During T1: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_2: +14 dB During T2: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_2: +14 dB During T3: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_2: +14 dB In signalling: A3-offset = -15dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB In signalling: 0dB	During T1: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_2: +14 dB During T2: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_2: +14 dB During T3: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_2: +14 dB In signalling: A3-offset = -15dB
7.5.3.5 NR SA FR2 direct SCell activation at SCell addition of known SCell	During T1: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_1: +14 dB $Ês_3$ / Noc_2: +14 dB During T2: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_1: +14 dB $Ês_3$ / Noc_2: +14 dB During T3: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_1: +14 dB $Ês_3$ / Noc_2: +14 dB In signalling: A3-offset = -15dB	During T1: 0dB 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB 0dB In signalling: 0dB	During T1: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_1: +14 dB $Ês_3$ / Noc_2: +14 dB During T2: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_1: +14 dB $Ês_3$ / Noc_2: +14 dB During T3: Noc_1: -112 dBm/15kHz Noc_2: -112 dBm/15kHz $Ês_1$ / Noc_1: +14 dB $Ês_2$ / Noc_1: +14 dB $Ês_3$ / Noc_2: +14 dB In signalling: A3-offset = -15dB
7.5.3.13 NR SA FR2 SCell Activation for SCell in FR2 intra-band in non-DRX	During T1: Noc_1: -104.7 dBm/15kHz Noc_2: -104.7 dBm/15kHz $Ês_1$ / Noc_1: +7 dB $Ês_2$ / Noc_2: +7 dB During T2: Noc_1: -104.7 dBm/15kHz Noc_2: -104.7 dBm/15kHz $Ês_1$ / Noc_1: +7 dB $Ês_2$ / Noc_2: +7 dB In signaling: A3-offset = -15dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB In signaling: 0dB	During T1: Noc_1: -104.7 dBm/15kHz Noc_2: -104.7 dBm/15kHz $Ês_1$ / Noc_1: +7 dB $Ês_2$ / Noc_2: +7 dB During T2: Noc_1: -104.7 dBm/15kHz Noc_2: -104.7 dBm/15kHz $Ês_1$ / Noc_1: +7 dB $Ês_2$ / Noc_2: +7 dB In signaling: A3-offset = -15dB

7.5.3.14 NR SA FR2 SCell Activation for known SCell in FR2 inter-band	During T1: Noc_1: -92.1 dBm/15kHz Noc_2: -92.1 dBm/15kHz $\hat{E}s_1$ / Noc_1: 0 dB $\hat{E}s_2$ / Noc_2: 0 B During T2: Noc_1: -92.1 dBm/15kHz Noc_2: -92.1 dBm/15kHz $\hat{E}s_1$ / Noc_1: 0 dB $\hat{E}s_2$ / Noc_2: 0 B In signalling: A3-offset = -15dB	During T1: -4.6dB -4.6dB 0dB 0dB During T2: -4.6dB -4.6dB 0dB 0dB In signalling: 0dB	During T1: Noc_1: -96.7 dBm/15kHz Noc_2: -96.7 dBm/15kHz $\hat{E}s_1$ / Noc_1: 0 dB $\hat{E}s_2$ / Noc_2: 0 B During T2: Noc_1: -96.7 dBm/15kHz Noc_2: -96.7 dBm/15kHz $\hat{E}s_1$ / Noc_1: 0 dB $\hat{E}s_2$ / Noc_2: 0 B In signalling: A3-offset = -15dB
7.5.5.1 NR SA FR2 SSB-based beam failure detection and link recovery in non-DRX	During T1: SNR_SSB q_0: 5 dB SNR_SSB q_1: 0.2 dB During T2: SNR_SSB q_0: -3 dB SNR_SSB q_1: 0.2 dB During T3-T5: SNR_SSB q_0: -12 dB SNR_SSB q_1: 20.2 dB In signalling: rsrp-ThresholdSSB: -95 dBm/120kHz for Config 1 rsrp-ThresholdSSB: -92 dBm/240kHz for Config 2	+8.70 dB 0 dB +8.70 dB 0 dB 0 dB -0.2 dB -14 dB -14 dB	During T1: SNR_SSB q_0: 13.7 dB SNR_SSB q_1: 0.2 dB During T2: SNR_SSB q_0: 5.7 dB SNR_SSB q_1: 0.2 dB During T3-T5: SNR_SSB q_0: -12 dB SNR_SSB q_1: 20 dB In signalling: rsrp-ThresholdSSB: -109 dBm/120kHz for Config 1 srp-ThresholdSSB: -106 dBm/240kHz for Config 2
7.5.5.2 NR SA FR2 SSB-based beam failure detection and link recovery in DRX	Same as 7.5.5.1	Same as 7.5.5.1	Same as 7.5.5.1
7.5.5.3 NR SA FR2 CSI-RS-based beam failure detection and link recovery in non-DRX	Noc = -104.7 dBm/120 kHz $\hat{E}s_1$ / N_{oc} for CSI-RS set q0 T1: 5 dB T2: -3 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}s_1$ / N_{oc} for CSI-RS set q1 T1: 0.2 dB T2: 0.2 dB T3: 20.2 dB T4: 20.2 dB T5: 20.2 dB rsrp-ThresholdSSB: -95 dBm/SCS kHz	0 dB 8.7 dB 8.7 dB 0 dB 0 dB 0 dB 0 dB 0 dB -0.2 dB -0.2 dB -0.2 dB -14 dB	Noc = -104.7 dBm/120 kHz $\hat{E}s_1$ / N_{oc} for CSI-RS set q0 T1: 13.7 dB T2: 5.7 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}s_1$ / N_{oc} for CSI-RS set q1 T1: 0.2 dB T2: 0.2 dB T3: 20 dB T4: 20 dB T5: 20 dB rsrp-ThresholdSSB: -109.0 dBm/SCS kHz
7.5.5.4 NR SA FR2 CSI-RS-based beam failure detection and link recovery in DRX	Same as 7.5.5.3	Same as 7.5.5.3	Same as 7.5.5.3
7.5.5.5 NR SA FR2 scheduling available restriction during SSB-based beam failure detection and link recovery in non-DRX	Same as 7.5.5.1	Same as 7.5.5.1	Same as 7.5.5.1
7.5.5.6 NR SA FR2 SCell CSI-RS-based beam failure detection	Noc = -104.7 dBm/120 kHz $\hat{E}s_2$ / N_{oc} for CSI-RS set q0 T1: 5 dB	0 dB 8.7 dB	Noc = -104.7 dBm/120 kHz $\hat{E}s_2$ / N_{oc} for CSI-RS set q0 T1: 13.7 dB

and link recovery in non-DRX	T2: -3 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}s_2$ / N_{oc} for CSI-RS set q1 T1: 0.2 dB T2: 0.2 dB T3: 20.2 dB T4: 20.2 dB T5: 20.2 dB rsrp-ThresholdBFR: -95 dBm/SCS kHz	8.7 dB 0 dB 0 dB 0 dB 0 dB 0 dB -0.2 dB -0.2 dB -0.2 dB -14 dB	T2: 5.7 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}s_2$ / N_{oc} for CSI-RS set q1 T1: 0.2 dB T2: 0.2 dB T3: 20 dB T4: 20 dB T5: 20 dB rsrp-ThresholdBFR: -109.0 dBm/SCS kHz
7.5.5.7 NR SA FR2 SCell CSI-RS-based beam failure detection and link recovery in DRX	Same as 7.5.5.6	Same as 7.5.5.6	Same as 7.5.5.6
7.5.5.9 NR SA FR2 SCell TRP specific CSI-RS-based Beam Failure Detection and Link Recovery in DRX	Noc = -104.7 dBm/120 kHz $\hat{E}s_1$ / N_{oc} for CSI-RS set q0,0 T1: 5 dB T2: -3 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}s_1$ / N_{oc} for CSI-RS set q0,1 T1-T5: 5 dB $\hat{E}s_1$ / N_{oc} for CSI-RS set q1,0 T1: 0.2 dB T2: 0.2 dB T3: 20.2 dB T4: 20.2 dB T5: 20.2 dB rsrp-ThresholdSSB: -95 dBm/SCS kHz	0 dB 8.7 dB 8.7 dB 0 dB 0 dB 0 dB 8.7dB 0 dB 0 dB -0.2 dB -0.2 dB -0.2 dB -14 dB	Noc = -104.7 dBm/120 kHz $\hat{E}s_1$ / N_{oc} for CSI-RS set q0,0 T1: 13.7 dB T2: 5.7 dB T3: -12 dB T4: -12 dB T5: -12 dB $\hat{E}s_1$ / N_{oc} for CSI-RS set q0,1 T1-T5: 13.7 dB $\hat{E}s_1$ / N_{oc} for CSI-RS set q1,0 T1: 0.2 dB T2: 0.2 dB T3: 20 dB T4: 20 dB T5: 20 dB rsrp-ThresholdSSB: -109.0 dBm/SCS kHz
7.5.5.10 NR SA FR2 PCell TRP specific SSB-based Beam Failure Detection and Link Recovery in non-DRX	During T1: SNR_SSB $q_{0,0}$: 5 dB SNR_SSB $q_{0,1}$: 5 dB SNR_SSB $q_{1,0}$: 0.2 dB During T2: SNR_SSB $q_{0,0}$: -3 dB SNR_SSB $q_{0,1}$: 5 dB SNR_SSB $q_{1,0}$: 0.2 dB During T3-T5: SNR_SSB $q_{0,0}$: -12 dB SNR_SSB $q_{0,1}$: 5 dB SNR_SSB $q_{1,0}$: 20.2 dB In signaling: rsrp-ThresholdSSB: -95 dBm/120kHz for Config 1 rsrp-ThresholdSSB: -92 dBm/240kHz for Config 2	 +8.70 dB +8.70 dB 0 dB +8.50 dB +8.70 dB 0 dB 0 dB +8.70 dB -0.2 dB -14 dB -14 dB	During T1: SNR_SSB $q_{0,0}$: 13.7 dB SNR_SSB $q_{0,1}$: 13.7 dB SNR_SSB $q_{1,0}$: 0.2 dB During T2: SNR_SSB $q_{0,0}$: 5.5 dB SNR_SSB $q_{0,1}$: 13.7 dB SNR_SSB $q_{1,0}$: 0.2 dB During T3-T5: SNR_SSB $q_{0,0}$: -12 dB SNR_SSB $q_{0,1}$: 13.7 dB SNR_SSB $q_{1,0}$: 20 dB In signaling: rsrp-ThresholdSSB: -109 dBm/120kHz for Config 1 srp-ThresholdSSB: -106 dBm/240kHz for Config 2
7.5.6.2.1 NR SA FR2 RRC-based DL active BWP switch in non-DRX	During T1: Noc2: -112dBm/15kHz Ês2 / Iot2: +18dB	During T1: 0dB 0dB	During T1: Noc2: -112dBm/15kHz Ês2 / Iot2: +18dB
7.5.8.1.1 NR SA PCell FR2 MAC-CE based active TCI state switch for a known TCI state	During T1: SSB#0: Ês / Iot, BB: +8.3dB SSB#0: Ês: -80.6dB SSB#1: Ês / Iot, BB: - infinity SSB#1: Ês: - infinity	During T1: 0dB -0.3dB 0dB 0dB	During T1: SSB#0: Ês / Iot, BB: +8.3dB SSB#0: Ês: -80.9dB SSB#1: Ês / Iot, BB: - infinity SSB#1: Ês: - infinity

	During T2: SSB#0: Ês / Iot, BB: +8.3dB SSB#0: Ês: -80.6dB SSB#1: Ês / Iot, BB: +8.3dB SSB#1: Ês: -80.6dB	During T2: 0dB -0.3FFSdB 0dB -0.3FFSdB	During T2: SSB#0: Ês / Iot, BB: +8.3dB SSB#0: Ês: -80.9dB SSB#1: Ês / Iot, BB: +8.3dB SSB#1: Ês: -80.9dB
7.5.8.2.1 NR SA Pcell FR2 RRC based active TCI state switch for a known TCI state	Same as 7.5.8.1.1	Same as 7.5.8.1.1	Same as 7.5.8.1.1
7.5.9.1.1 EN-DC PSCell FR2 uplink spatial relation switch for a known spatial relation	During T1: Ês / N_{oc}: 1 dB During T2: Ês / N_{oc}: 1 dB During T3: Ês / N_{oc}: -infinity dB During T4: Ês / N_{oc}: 1 dB	During T1: 0 dB During T2: 0 dB During T3: 0 dB During T4: 0 dB	During T1: Ês / N_{oc}: 1 dB During T2: Ês / N_{oc}: 1 dB During T3: Ês / N_{oc}: -infinity dB During T4: Ês / N_{oc}: 1 dB
7.5.9.2.1 EN-DC PSCell FR2 uplink spatial relation switch associated with a known DL-RS	During T1: Ês / N_{oc}: 1 dB During T2: Ês / N_{oc}: 1 dB During T3: Ês / N_{oc}: -infinity dB During T4: Ês / N_{oc}: 1 dB	During T1: 0 dB During T2: 0 dB During T3: 0 dB During T4: 0 dB	During T1: Ês / N_{oc}: 1 dB During T2: Ês / N_{oc}: 1 dB During T3: Ês / N_{oc}: -infinity dB During T4: Ês / N_{oc}: 1 dB
7.5.11.1 NR SA FR2 UE UL carrier RRC reconfiguration delay	During T1: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: +7dB During T2: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: +7dB During T3: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: +7dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB	During T1: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: +7dB During T2: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: +7dB During T3: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: +7dB
7.5.12.1 Addition and Release Delay of PSCell	During T1: Ês: -infinity During T2~T4: Ês: -81dBm/SCS	During T1: 0dB During T2~T4: 0dB	During T1: Ês: -infinity During T2~T4: Ês: -81dBm/SCS
7.5.13.6.1 NR SA FR2 MAC-CE based active uplink TCI state switch for 2 known TCI states	During T1: Noc: -83.10dBm/120kHz Ês0 / Noc: 1 dB Ês1/ Noc: -infinity Ês2 / Noc: -infinity Ês3 / Noc: -infinity During T2: Noc: -83.10dBm/120kHz Ês0 / Noc: 1 dB Ês1/ Noc: 1 dB Ês2 / Noc: 1 dB	During T1: -3dB 2.4dB 0dB 0dB 0dB During T2: -3dB 2.4dB 2.4dB 2.4dB	During T1: Noc: -86.10dBm/120kHz Ês0 / Noc: 3.4 dB Ês1/ Noc: -infinity Ês2 / Noc: -infinity Ês3 / Noc: -infinity During T2: Noc: -86.10dBm/120kHz Ês0 / Noc: 3.4 dB Ês1/ Noc: 3.4 dB Ês2 / Noc: 3.4 dB

	Ês3 / Noc: 1 dB	2.4dB	Ês3 / Noc: 3.4 dB
7.5.14 NR SA FR2 PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2	During T1~T4: Noc: -104.7 dBm/15kHz Ês / Noc: 7 dB	During T1~T4: 0.9dB 0dB	During T1~T4: Noc: -103.8 dBm/15kHz Ês / Noc: 7 dB
7.6.1.1 NR SA FR2 event-triggered reporting without gap in non-DRX	During T1: Ês1: -86dBm/120kHz Ês2: -infinity During T2: Ês1: -86dBm/120kHz Ês2: -86dBm/120kHz	During T1: 0dB 0dB During T2: 0dB 0dB	During T1: Ês1: -86dBm/120kHz Ês2: -infinity During T2: Ês1: -86dBm/120kHz Ês2: -86dBm/120kHz
7.6.1.2 NR SA FR2 event-triggered reporting without gap in DRX	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: +4.00dB Signalled A3-offset: -6.0	During T1: -3.5dB 0dB 0dB During T2: -3.5dB 0dB 0dB Signalled A3-offset: -1.0	During T1: Noc: -101.5dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: -infinity During T2: Noc: -101.5dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: +4.00dB Signalled A3-offset: -7.0
7.6.1.3 NR SA FR2 event-triggered reporting with gap in non-DRX	Same as 7.6.1.1	Same as 7.6.1.1	Same as 7.6.1.1
7.6.1.4 NR SA FR2 event-triggered reporting with gap in DRX	Same as 7.6.1.2	Same as 7.6.1.2	Same as 7.6.1.2
7.6.2.1 NR SA FR2-FR2 event-triggered reporting in non-DRX	During T1: Ês1: -87 dBm/120kHz Ês2: - infinity During T2: Ês1: -87 dBm/120kHz Ês2: -87 dBm/120kHz	During T1: 0dB 0dB During T2: 0dB 0dB	During T1: Ês1: -87 dBm/120kHz Ês2: - infinity During T2: Ês1: -87 dBm/120kHz Ês2: -87 dBm/120kHz
7.6.2.2 NR SA FR2-FR2 event-triggered reporting in DRX	During T1: Noc: -104.70dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: -infinity During T2: Noc: -104.70dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: +9.00dB Signalled A3-offset: -6.0	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB Signalled A3-offset: -6.0	During T1: Noc: -104.70dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: -infinity During T2: Noc: -104.70dBm/15kHz Ês1 / Noc: +6.00dB Ês2 / Noc: +9.00dB Signalled A3-offset: -12.0
7.6.2.3 NR SA FR2-FR2 event-triggered reporting in non-DRX with SSB time index detection	Same as 7.6.2.1	Same as 7.6.2.1	Same as 7.6.2.1
7.6.2.4 NR SA FR2-FR2 event-triggered reporting in DRX with SSB time index detection	Same as 7.6.2.2	Same as 7.6.2.1	Same as 7.6.2.1
7.6.2.5 SA event triggered reporting tests for FR2 without SSB time index detection	During T1: Ês2: - Infinity During T2: Ês2: -87 dBm/120kHz	During T1: 0dB During T2: 0dB	During T1: Ês2: - Infinity During T2: Ês2: -87 dBm/120kHz

when DRX is not used (PCell in FR1)			
7.6.2.6 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (PCell in FR1)	During T1: Noc = -104.7 dBm/15 kHz Ês2 / Noc = - Infinity During T2: Noc = -104.7 dBm/15 kHz Ês2 / Noc = 9 dB	During T1: 0dB 0dB During T2: 0dB 0dB	During T1: Noc = -104.7 dBm/15 kHz Ês2 / Noc = - Infinity During T2: Noc = -104.7 dBm/15 kHz Ês2 / Noc = 9 dB
7.6.2.7 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR1)	Same as 5.6.2.5	Same as 5.6.2.5	Same as 5.6.2.5
7.6.2.8 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (PCell in FR1)	Same as 5.6.2.6	Same as 5.6.2.6	Same as 5.6.2.6
7.6.2.10	During T1: Noc: -102dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: -Infinity During T2: Noc: -102dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: +8.00dB	During T1: -0.7dB 0dB 0dB During T2: -0.7dB 0dB 0dB	During T1: Noc: -102.7dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: -Infinity During T2: Noc: -102.7dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: +8.00dB
7.6.2.11	During T1: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: -Infinity During T2: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: +4.00dB	During T1: -1.2dB 0dB 0dB During T2: -1.2dB 0dB 0dB	During T1: Noc: -99.2dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: -Infinity During T2: Noc: -99.2dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: +4.00dB
7.6.3.1 NR SA FR2 SSB-based L1-RSRP measurement in non-DRX	Same as 5.6.3.1	Same as 5.6.3.1	Same as 5.6.3.1
7.6.3.2 NR SA FR2 SSB-based L1-RSRP measurement in DRX	Same as 5.6.3.1	Same as 5.6.3.1	Same as 5.6.3.1
7.6.3.3 NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX	Noc: -105dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +9.00dB Reported CSI-RSRP values ± 29dB Reported Differential CSI-RSRP values ± 7dB	0dB 0dB 0dB Via mapping	Noc: -105dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +9.00dB CSI-RS#1: RSRP_40 to RSRP_99 CSI-RS#0: DIFFRSRP_1 to DIFFRSRP_7
7.6.3.4 NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX	Same as 7.6.3.3	Same as 7.6.3.3	Same as 7.6.3.3
7.6.3.6 NR SA FR2 Inter-cell SSB based L1-RSRP measurements on FR2 SCell when DRX is not used	Same as 7.6.6.2	Same as 7.6.6.2	Same as 7.6.62
7.6.4.1 NR SA FR2 SRS-RSRP measurement in non-DRX	Same as 5.6.4.1	Same as 5.6.4.1	Same as 5.6.4.1

7.6.6.1 NR SA FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	Same as 5.6.6.1	Same as 5.6.6.1	Same as 5.6.6.1
7.6.6.2 NR SA FR2 SSB based CMR and dedicated IMR L1-SINR measurement accuracy	During T1: Noc: -105dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: -infinity During T2: Noc: -105dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: +9.00dB Reported SS-SINR values ± 4.5dB Reported Differential SS-SINR values ± 3.5dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB Via mapping	During T1: Noc: -105dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: -infinity During T2: Noc: -105dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: +9.00dB SSB#1: SINR_53 to SINR_72 SSB#0: DIFFSINR_5 to DIFFSINR_12
7.6.6.3 NR SA FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	Noc: -105dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +9.00dB Reported CSI-SINR values ± 4.0dB Reported Differential CSI-SINR values ± 3.0dB	0dB 1.5dB 0dB Via mapping	Noc: -105dBm/15kHz $\hat{E}s_0$ / Noc: +1.50dB $\hat{E}s_1$ / Noc: +9.00dB CSI-RS#1: SINR_54 to SINR_71 CSI-RS#0: DIFFSINR_4 to DIFFSINR_10
7.6.13.1 NR SA FR2 UE Rx-Tx time difference measurement for propagation delay compensation using PRS	During T1: Noc : -98 dBm/15kHz Ês / Noc: infinity During T2: Noc: -98 dBm/15kHz Ês / Noc: -2 dB	During T1: 0 dB 0 dB During T2: 0 dB 0 dB	During T1: Noc : -98 dBm/15kHz Ês / Noc: infinity During T2: Noc: -98 dBm/15kHz Ês / Noc: -2 dB
7.6.13.2 NR SA FR2 UE Rx-Tx time difference measurement for propagation delay compensation using TRS	Same as 7.6.13.1	Same as 7.6.13.1	Same as 7.6.13.1
7.6.14.1 NR SA FR2 event triggered reporting tests with pre-configured measurement gaps and autonomous activation/deactivation	During T1 – T2: Ês1: -89dBm/120kHz Ês2: -infinity During T3: Ês1: -89dBm/120kHz Ês2: -89dBm/120kHz Signalled A4-Thresholds: -120 dBm/SCS	During T1 - T2: 0dB 0dB During T3: 0dB 0dB 0 dB	During T1 – T2: Ês1: -89dBm/120kHz Ês2: -infinity During T3: Ês1: -89dBm/120kHz Ês2: -89dBm/120kHz Signalled A4-Thresholds: -120 dBm/SCS
7.6.14.2 NR SA FR2 event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation	During T1 – T2: Ês1: -89dBm/120kHz Ês2: -infinity During T3: Ês1: -89dBm/120kHz Ês2: -89dBm/120kHz Signalled A3-Offset: -11 dB	During T1 – T2: 0dB 0dB During T3: 0dB 0dB 0 dB	During T1 – T2: Ês1: -89dBm/120kHz Ês2: -infinity During T3: Ês1: -89dBm/120kHz Ês2: -89dBm/120kHz Signalled A3-Offset: -11 dB
7.6.15.1 NR SA FR2 SA event triggered reporting tests with fully non-overlapping concurrent MGs for SSB-based	During T1: Ês1: -87dBm/120kHz Ês2: -infinity Ês3: -infinity During T2:	During T1: 0dB 0dB 0dB During T2:	During T1: Ês1: -87dBm/120kHz Ês2: -infinity Ês3: -infinity During T2:

inter-frequency measurements	Ês1: -87dBm/120kHz Ês2: -87dBm/120kHz Ês3: -87dBm/120kHz Signalled offsetMO: 16 dB Signalled A3-Offset: -11 dB	0dB 0dB 0dB Signalled offsetMO: 0dB Signalled A3-offset: 0 dB	Ês1: -87dBm/120kHz Ês2: -87dBm/120kHz Ês3: -87dBm/120kHz Signalled offsetMO: 16dB Signalled A3-offset: -11dB
7.6.15.2 NR SA FR2 event triggered reporting tests with concurrent measurement gaps without SSB time index detection when DRX is not used (PCell in FR2)	Same as 7.6.15.1	Same as 7.6.15.1	Same as 7.6.15.1
7.6.15.3 NR SA FR2 event triggered reporting tests with concurrent measurement gaps with partially partial overlapping scenario for SSB-based measurements and PRS-based measurement	During T1: Noc1: -102.0dBm/15kHz Noc2: -104.7dBm/15kHz Noc3: -102.0dBm/15kHz SSB Ês1: -89.7dBm/120kHz SSB Ês2: -infinity SSB Ês3: -infinity PRS Ês1: -infinity PRS Ês3: -infinity During T2: Noc1: -102.0dBm/15kHz Noc2: -104.7dBm/15kHz Noc3: -102.0dBm/15kHz SSB Ês1: -89.7dBm/120kHz SSB Ês2: -86.7dBm/120kHz SSB Ês3: -86.7dBm/120kHz PRS Ês1: -96dBm/120kHz PRS Ês3: -103dBm/120kHz Signalled A3-Offset: -6 dB	During T1: 0dB 0dB 0dB 0dB 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB -0.6dB 0dB 0.2dB Signalled A3-offset: -6 dB	During T1: Noc1: -102.0dBm/15kHz Noc2: -104.7dBm/15kHz Noc3: -102.0dBm/15kHz SSB Ês1: -89.7dBm/120kHz SSB Ês2: -infinity SSB Ês3: -infinity PRS Ês1: -infinity PRS Ês3: -infinity During T2: Noc1: -102.0dBm/15kHz Noc2: -104.7dBm/15kHz Noc3: -102.0dBm/15kHz SSB Ês1: -89.7dBm/120kHz SSB Ês2: -86.7dBm/120kHz SSB Ês3: -87.3dBm/120kHz PRS Ês1: -96dBm/120kHz PRS Ês3: -102.8dBm/120kHz Signalled A3-offset: -12dB
7.6.16.1 NR SA FR2 event triggered reporting tests with per-UE NCSG under non-DRX	Same as 7.6.1.1	Same as 7.6.1.1	Same as 7.6.1.1
7.6.16.2 NR SA FR2 event triggered reporting tests on inter-frequency measurement with NCSG when DRX is not used(PCell in FR2)	During T1: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +6 dB Ês2 / Noc2: -infinity dB During T2: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +6 dB Ês2 / Noc2: +9 dB Signalled offsetMO: 16 dB Signalled A3-Offset: -11 dB	During T1: 0 dB 0 dB 2.7 dB 0 dB During T2: 0 dB 0 dB 2.7 dB 0 dB 0 dB 0 dB	During T1: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +8.7 dB Ês2 / Noc2: -infinity dB During T2: Noc1: -104.7dBm/15kHz Noc2: -104.7dBm/15kHz Ês1 / Noc1: +8.7 dB Ês2 / Noc2: +9 dB Signalled offsetMO: 16 dB Signalled A3-Offset: -11 dB
7.6.16.3 NR SA FR2 event triggered reporting tests on deactivated SCell measurement via NCSG in non-DRX	During T1: Ês2: -89dBm/120kHz Ês3: -infinity During T2: Ês2: -89dBm/120kHz Ês3: -89dBm/120kHz Signalled A3-Offset: -11 dB	During T1: 0 dB 0 dB During T2: 0 dB 0 dB 0 dB	During T1: Ês2: -89dBm/120kHz Ês3: -infinity During T2: Ês2: -89dBm/120kHz Ês3: -89dBm/120kHz Signalled A3-Offset: -11 dB

7.7.1.1 NR SA FR2 SS-RSRP measurement accuracy	UE PC1		
	Test 1: Noc: -91.60dBm/15kHz Ês2 / Noc: +6.0dB Ês3 / Noc: +1.0dB Reported absolute RSRP values: ±8dB Reported relative RSRP values: ±6dB For extreme conditions allow ±3dB + FFS MU additionally Test 2: n257 Ês2: -108.2dBm/120kHz n257 Ês3: -108.2dBm/120kHz n260 Ês2: -105.2dBm/120kHz n260 Ês3: -105.2dBm/120kHz Reported absolute RSRP values: ±8dB Reported relative RSRP values: ±6dB For extreme conditions allow ±3dB+ FFS MU additionally	Test 1: -5.80dB 0dB 0.4dB Via Mapping Test 2: 6dB 6dB 6dB 6dB Via Mapping	Test 1: Noc: -97.40dBm/15kHz Ês2 / Noc: +6.0dB Ês3 / Noc: +1.4dB Cell 2: RSRP_61 to RSRP_126 Cell 3: RSRP_56 to RSRP_126 Cell 3: RSRP_x-12 to RSRP_X+2 Test 2: n257 Ês2: -102.2dBm/120kHz n257 Ês3: -102.2dBm/120kHz n260 Ês2: -99.2dBm/120kHz n260 Ês3: -99.2dBm/120kHz Band dependent. See test case tables in clause 5.7.1.1.5
	UE PC3		
	Test 1: Noc: -91.60dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.0dB Reported absolute RSRP values: ±8dB Reported relative RSRP values: ±6dB For extreme conditions allow ±3dB + FFS MU additionally Test 2: n257 Ês1: -110.0dBm/120kHz n257 Ês2: -110.0dBm/120kHz n260 Ês1: -107.4dBm/120kHz n260 Ês2: -107.4dBm/120kHz Reported absolute RSRP values: ±8dB Reported relative RSRP values: ±6dB For extreme conditions allow ±3dB+ FFS MU additionally	Test 1: -5.80dB 0dB 0.4dB Via Mapping Test 2: 7.70dB 7.70dB 7.70dB 7.70dB Via Mapping	Test 1: Noc: -97.40dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.4dB Cell 1: RSRP_50 to RSRP_108 Cell 2: RSRP_46 to RSRP_103 Cell 2: RSRP_x-12 to RSRP_X+2 Test 2: n257 Ês1: -102.3dBm/120kHz n257 Ês2: -102.3dBm/120kHz n260 Ês1: -99.7dBm/120kHz n260 Ês2: -99.7dBm/120kHz Band dependent. See test case tables in clause 5.7.1.1.5
7.7.1.2 NR SA FR2-FR2 SS-RSRP measurement accuracy	Test 1 Config 1: Noc1: -90.60dBm/15kHz Noc2: -90.60dBm/15kHz Ês1 / Noc1: +6.0dB Ês2 / Noc2: +6.0dB Reported absolute RSRP values: ±8.0dB For extreme conditions allow ±3dB+ FFS MU additionally Reported relative RSRP values: ±6.0dB For extreme conditions allow ±3dB+ FFS MU additionally Test 2 Config 1: n257 Noc1: -108.13dBm/15kHz n257 Noc2: -113.13dBm/15kHz n260 Noc1: -105.53dBm/15kHz n260 Noc2: -110.53dBm/15kHz Ês1 / Noc1: 17.0dB Ês2 / Noc2: -1.0dB	Test 1 Config 1: -5.70dB -5.70dB 0dB 0dB Via Mapping Via Mapping Test 2 Config 1: -6.60dB 0dB -6.60dB 0dB 0dB 2dB	Test 1 Config 1: Noc1: -96.30dBm/15kHz Noc2: -96.30dBm /15kHz Ês1 / Noc1: +6.0dB Ês2 / Noc2: +6.0dB Cell 1 n257: RSRP_41 to RSRP_109 n260: RSRP_39 to RSRP_109 Cell 2: RSRP_52 to RSRP_109 Cell 2: n257: RSRP_x-23 to RSRP_x+26 n260: RSRP_x-23 to RSRP_x+27 Test 2 Config 1: -114.73dBm/15kHz -113.13dBm/15kHz -112.13dBm/15kHz -110.53dBm/15kHz

	Reported absolute RSRP values: ±8.0dB For extreme conditions allow ±3dB+ FFS MU additionally Reported relative RSRP values: ±6.0dB For extreme conditions allow ±3dB+ FFS MU additionally Test 1 Config 2: Noc1: -93.70dBm/15kHz Noc2: -93.70dBm/15kHz Ês1 / Noc1: +6.0dB Ês2 / Noc2: +6.0dB Reported absolute RSRP values: ±8.0dB For extreme conditions allow ±3dB+ FFS MU additionally Reported relative RSRP values: ±6.0dB For extreme conditions allow ±3dB+ FFS MU additionally Test 2 Config 2: n257 Noc1: -108.13dBm/15kHz n257 Noc2: -113.13dBm/15kHz n260 Noc1: -105.53dBm/15kHz n260 Noc2: -110.53dBm/15kHz Ês1 / Noc1: 17.0dB Ês2 / Noc2: -1.0dB Reported absolute RSRP values: ±8.0dB For extreme conditions allow ±3dB+ FFS MU additionally Reported relative RSRP values: ±6.0dB For extreme conditions allow ±3dB+ FFS MU additionally	Via Mapping Via Mapping Test 1 Config 2: -5.60dB -5.60dB 0dB 0dB Via Mapping Via Mapping Test 2 Config 2: -6.60dB 0dB -6.60dB 0dB 0dB 2dB Via Mapping Via Mapping	Ês1 / Noc1: 17.0dB Ês2 / Noc2: 1.0dB Cell 1 n257: RSRP_33 to RSRP_101 n260: RSRP_34 to RSRP_104 Cell 2: n257: RSRP_32 to RSRP_87 n260: RSRP_34 to RSRP_90 Cell 2: n257: RSRP_x-37 to RSRP_x+17 n260: RSRP_x-37 to RSRP_x+19 Test 1 Config 2: Noc1: -99.30dBm/15kHz Noc2: -99.30dBm /15kHz Ês1 / Noc1: +6.0dB Ês2 / Noc2: +6.0dB Cell 1 n257: RSRP_41 to RSRP_109 n260: RSRP_39 to RSRP_109 Cell 2: RSRP_52 to RSRP_109 Cell 2: n257: RSRP_x-23 to RSRP_x+26 n260: RSRP_x-23 to RSRP_x+27 Test 2 Config 2: -114.73dBm/15kHz -113.13dBm/15kHz -112.13dBm/15kHz -110.53dBm/15kHz Ês1 / Noc1: 17.0dB Ês2 / Noc2: 1.0dB Cell 1 n257: RSRP_36 to RSRP_104 n260: RSRP_37 to RSRP_107 Cell 2: n257: RSRP_35 to RSRP_90 n260: RSRP_37 to RSRP_93 Cell 2: n257: RSRP_x-37 to RSRP_x+17 n260: RSRP_x-37 to RSRP_x+19
7.7.1.3 NR SA FR1-FR2 SS-RSRP measurement accuracy	Test 1: Noc: -90dBm/15kHz Ês2 / Noc: +5.0dB Reported absolute RSRP values: ±8dB For extreme conditions allow ±3dB + FFS MU additionally Test 2: n257 Ês2: -98.2dBm/120kHz n260 Ês2: -93.9dBm/120kHz	Test 1: -5.50dB 0dB Via Mapping Test 2: 5.50dB 5.50dB	Test 1: Noc: -95.50dBm/15kHz Ês2 / Noc: +5dB Band dependent. See test case tables in clause 7.7.1.3.5 Test 2: n257 Ês2: -92.7dBm/120kHz n260 Ês2: -88.4dBm/120kHz

	Reported absolute RSRP values: ±8dBFor extreme conditions allow ±3dB+ FFS MU additionally	Via Mapping	Band dependent. See test case tables in clause 7.7.1.3.5
7.7.2.1 NR SA FR2 SS-RSRQ measurement accuracy	Test 1: Noc: -95.0dBm/15kHz Ês1 / Noc: +3.0dB Ês2 / Noc: +3.0dB Reported absolute RSRQ values: ±2.5dB For extreme conditions allow ±1.5dB+ FFS MU additionally Test 2: Noc: -95.0dBm/15kHz Ês1 / Noc: -3.0dB Ês2 / Noc: -3.0dB Reported absolute RSRQ values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally	Test 1: -5.70dB 0dB 0dB Via Mapping Test 2: -1.70dB 0dB 0dB Via Mapping	Test 1: Noc: -100.70dBm/15kHz Ês1 / Noc: +3.0dB Ês2 / Noc: +3.0dB Cell 2: All bands: RSRQ_41 to RSRQ_73 Test 2: Noc: -96.70dBm/15kHz Ês1 / Noc: -3.0dB Ês2 / Noc: -3.0dB Cell 2: n257, n258, n261: RSRQ_35 to RSRQ_71 n260: RSRQ_34 to RSRQ_71
7.7.2.2 NR SA FR2-FR2 SS-RSRQ measurement accuracy	Test 1: Noc1: -94.03dBm/15kHz Noc2: -94.03dBm/15kHz Ês1 / Noc1: -1.75dB Ês2 / Noc2: -1.75dB Reported absolute RSRQ values: ±2.5dB For extreme conditions allow ±1.5dB+ FFS MU additionally Reported relative RSRQ values: ±3.0dB For extreme conditions allow ±1.0dB+ FFS MU additionally Test 2: Noc1: -94.03dBm/15kHz Noc2: -94.03dBm/15kHz Ês1 / Noc1: -3.0dB Ês2 / Noc2: -3.0dB Reported absolute RSRQ values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally Reported relative RSRQ values: ±4.0dB For extreme conditions allow ±0.0dB+ FFS MU additionally	Test 1: -1.90dB -1.90dB 0dB 0dB Via Mapping Via Mapping Test 2: -1.41dB -1.41dB 0dB 0dB Via Mapping Via Mapping	Test 1: Noc1: -95.93dBm/15kHz Noc2: -95.93dBm /15kHz Ês1 / Noc1: -1.75dB Ês2 / Noc2: -1.75dB Cell 1 and Cell 2: RSRQ_41 to RSRQ_73 Cell 2: RSRQ_x-7 to RSRQ_x+7 Test 2: Noc1: -95.44dBm/15kHz Noc2: -95.44dBm /15kHz Ês1 / Noc1: -3.0dB Ês2 / Noc2: -3.0dB Cell 1 and Cell 2: RSRQ_37 to RSRQ_74 Cell 2: RSRQ_x-9 to RSRQ_x+9
7.7.3.1 NR SA FR2 SS-SINR measurement accuracy	Test 1: Noc: -105.0dBm/15kHz Ês1 / Noc: +4.54dB Ês2 / Noc: +2.66dB Reported absolute SINR values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally Test 2: Noc: -105.0dBm/15kHz Ês1 / Noc: -3.0dB Ês2 / Noc: -3.0dB Reported absolute SINR values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally	Test 1: 0dB 0dB 0dB Via Mapping Test 2: 0dB 0.2dB 0.2dB Via Mapping	Test 1: Noc: -105.0dBm/15kHz Ês1 / Noc: +4.54dB Ês2 / Noc: +2.66dB Cell 2: n257, n258, n261: SINR_22 to RSRQ_58 n260: SINR_21 to RSRQ_58 Test 2: Noc: -105.0dBm/15kHz Ês1 / Noc: -2.8dB Ês2 / Noc: -2.8dB Cell 2: n257, n258, n261: SINR_18 to RSRQ_55 n260: SINR_18 to RSRQ_54
7.7.3.2 NR SA FR2-FR2 SS-SINR measurement accuracy	Test 1: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -0.5dB Ês2 / Noc2: -0.5dB Reported absolute SINR values: ±3.0dB	Test 1: 0dB 0dB 0dB 0dB Via Mapping	Test 1: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -0.5dB Ês2 / Noc2: -0.5dB Cell 1 and Cell 2: n257, n258, n261:

	For extreme conditions allow ±1.0dB+ FFS MU additionally Reported absolute SINR values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally Test 2: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: +11.0dB Ês2 / Noc2: +11.0dB Reported absolute SINR values: ±3.0dB For extreme conditions allow ±1.0dB+ FFS MU additionally Reported absolute SINR values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally Test 3: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -3.0dB Ês2 / Noc2: -3.0dB Reported absolute SINR values: ±3.5dB For extreme conditions allow ±0.5dB+ FFS MU additionally Reported absolute SINR values: ±4.0dB For extreme conditions allow ±0.0dB+ FFS MU additionally	 Via Mapping Test 2: -0.1dB -0.1dB 0dB 0dB Via Mapping Via Mapping Test 3: 0dB 0dB 0.9dB 0.9dB Via Mapping Via Mapping	SINR_27 to SINR_62 n260: SINR_27 to SINR_61 Cell 2: SINR_x-8 to SINR_x+8 Test 2: Noc1: -105.1dBm/15kHz Noc2: -105.1dBm/15kHz Ês1 / Noc1: +11.0dB Ês2 / Noc2: +11.0dB Cell 1 and Cell 2: n257, n258, n261: SINR_48 to SINR_87 n260: SINR_48 to SINR_86 Cell 2: SINR_x-17 to SINR_x+17 Test 3: Noc1: -105.0dBm/15kHz Noc2: -105.0dBm/15kHz Ês1 / Noc1: -2.1dB Ês2 / Noc2: -2.1dB Cell 1 and Cell 2: n257, n258, n261: SINR_23 to SINR_60 n260: SINR_22 to SINR_59 Cell 2: SINR_x-9 to SINR_x+9
7.7.4.1 NR SA FR2 SSB based L1-RSRP measurement accuracy	Test 1: Noc: -100dBm/15kHz SSB#0 Ês / Noc: +10.0dB SSB#1 Ês / Noc: -2.0dB Reported absolute RSRP values: ±8.5dB Reported relative RSRP values: ±6.5dB For extreme conditions allow ±3dB + FFS MU additionally Test 2: n257 SSB#0 Ês: -108.1dBm/120kHz n257 SSB#1 Ês: -105.5dBm/120kHz n260 SSB#0 Ês: -108.1dBm/120kHz n260 SSB#1 Ês: -105.5dBm/120kHz Reported absolute RSRP values: -6.5 +8.5dB Reported relative RSRP values: ±6.5dB For extreme conditions allow ±3dB+ FFS MU additionally	Test 1: -4.1dB 0dB 0.4dB Test 2: 5.7dB	Test 1: Noc: -104.1dBm/15kHz SSB#0 Ês / Noc: +10.0dB SSB#1 Ês / Noc: -1.6dB SSB#0: RSRP_42 to RSRP_101 SSB#1: RSRP_31 to RSRP_89 SSB#1-SSB#0: -9 to -2 Test 2: n257 SSB#0 Ês: -102.4dBm/120kHz n257 SSB#1 Ês: -99.8dBm/120kHz n260 SSB#0 Ês: -102.4dBm/120kHz n260 SSB#1 Ês: -99.8dBm/120kHz SSB#0 and SSB#1 n257: RSRP_27 to RSRP_83 n260: RSRP_30 to RSRP_86 SSB#1-SSB#0: -4 to +4
7.7.4.2 NR SA FR2 CSI-RS based L1-RSRP measurement accuracy	Test 1: Noc: -100dBm/15kHz CSI-RS#0 Ês / Noc: +10.0dB CSI-RS#1 Ês / Noc: -2.0dB Reported absolute RSRP values: ±8.5dB Reported relative RSRP values: ±6.5dB For extreme conditions allow ±3dB + FFS MU additionally	Test 1: -4.1dB 0dB 0.2dB	Test 1: Noc: -104.1dBm/15kHz CSI-RS#0 Ês / Noc: +10.0dB CSI-RS#1 Ês / Noc: -1.8dB CSI-RS#0: RSRP_42 to RSRP_101 CSI-RS#1: RSRP_30 to RSRP_89

	Test 2: n257 CSI-RS#0 Ês: -108.1dBm/120kHz n257 CSI-RS#1 Ês: -105.5dBm/120kHz n260 CSI-RS#0 Ês: -108.1dBm/120kHz n260 CSI-RS#1 Ês: -105.5dBm/120kHz Reported absolute RSRP values: -6.5 +8.5dB Reported relative RSRP values: ±6.5dB For extreme conditions allow ±3dB+ FFS MU additionally	Test 2: 5.7dB	CSI-RS#1-CSI-RS#0: -9 to -2 Test 2: n257 CSI-RS#0 Ês: -102.4dBm/120kHz n257 CSI-RS#1 Ês: -99.8dBm/120kHz n260 CSI-RS#0 Ês: -102.4dBm/120kHz n260 CSI-RS#1 Ês: -99.8dBm/120kHz CSI-RS#0 and CSI-RS#1 n257: RSRP_27 to RSRP_83 n260: RSRP_30 to RSRP_86 CSI-RS#1-CSI-RS#0: -4 to +4
7.7.5.1 NR SA FR2 SRS-RSRP measurement accuracy	Same as 5.7.5.1	Same as 5.7.5.1	Same as 5.7.5.1
7.7.6.1 NR SA FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	Noc: -100dBm/15kHz Ês0 / Noc: 10.00dB Ês1 / Noc: -2.00dB Reported CSI-SINR values ± 5.5dB Reported Differential CSI-SINR values ± 4.5dB	-4.1dB 0dB 0.2dB Via mapping	Noc: -104.1dBm/15kHz Ês0 / Noc: 10.00dB Ês1 / Noc: -1.8dB CSI-RS#0: SINR_53 to SINR_76 CSI-RS#0: DIFFSINR_6 to DIFFSINR_15
7.7.6.2 NR SA FR2 SSB based CMR and dedicated IMR L1-SINR measurement accuracy	Noc: -100dBm/15kHz Ês0 / Noc: 10.00dB Ês1 / Noc: -2.00dB Reported SS-SINR values ± 4.5dB Reported Differential SS-SINR values ± 3.5dB	-4.1dB 0dB 0.2dB Via mapping	Noc: -104.1dBm/15kHz Ês0 / Noc: 10.00dB Ês1 / Noc: -1.8dB SSB#0: SINR_55 to SINR_74 SSB#0: DIFFSINR_7 to DIFFSINR_15
7.7.6.3 NR SA FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	Noc: -100dBm/15kHz Ês0 / Noc: 10.00dB Ês1 / Noc: 0.00dB Reported CSI-SINR values ± 4.5dB Reported Differential CSI-SINR values ± 3.5dB	-4.1dB 0dB 0.2dB Via mapping	Noc: -104.1dBm/15kHz Ês0 / Noc: 10.00dB Ês1 / Noc: 0.2dB CSI-RS#0: SINR_55 to SINR_74 CSI-RS#0: DIFFSINR_5 to DIFFSINR_13
7.7.8.1 NR SA intra-frequency FR2 CSI-RSRQ measurement accuracy	Same as 5.7.8.1	Same as 5.7.8.1	Same as 5.7.8.1
7.7.8.2 NR SA inter frequency FR2 CSI-RSRQ measurement accuracy	Same as 5.7.8.2	Same as 5.7.8.2	Same as 5.7.8.2
7.7.9.1 NR SA intra-frequency FR2 CSI-SINR measurement accuracy	Same as 5.7.9.1	Same as 5.7.9.1	Same as 5.7.9.1
7.7.9.2 NR SA inter frequency FR2 CSI-SINR measurement accuracy	Same as 5.7.9.2	Same as 5.7.9.2	Same as 5.7.9.2

Table F.1.3.2-5: Derivation of test requirements for E-UTRA – NR inter-RAT test cases with E-UTRA serving cell RRM tests

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
8.2.1.1 E-UTRA – NR FR1 cell re-selection to	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz	During T1: 0dB -1.90dB	During T1: Noc1: -98dBm/15kHz Noc2: -99.90dBm/15kHz

higher priority NR target cell	Ês1 / Noc1: +14dB Ês2 / Noc2: -4dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: +12dB	0dB 0.35dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 1.55dB 1.55dB	Ês1 / Noc1: +14dB Ês2 / Noc2: -3.65dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.55dB Ês2 / Noc2: +13.55dB
8.2.1.2 E-UTRA – NR FR1 Cell reselection to lower priority NR target Cell in FR1 for UE configured with highSpeedInterRAT-NR-r16	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -4dB Ês2 / Noc2: 14dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +12dB Ês2 / Noc2: +14dB	During T1: -1.90dB -1.90dB 0.35dB 3.45dB During T2: -1.90dB -1.90dB 3.45dB 0dB	During T1: Noc1: -99.9dBm/15kHz Noc2: -99.9dBm/15kHz Ês1 / Noc1: -3.65dB Ês2 / Noc2: 17.45dB During T2: Noc1: -99.9dBm/15kHz Noc2: -99.9dBm/15kHz Ês1 / Noc1: +15.45dB Ês2 / Noc2: +14dB
8.2.2.1 E-UTRA – NR FR1 Early Measurement Reporting	During T1: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +14dB $Ês_2$ / Noc_2: -infinity During T2: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +14dB $Ês_2$ / Noc_2: -4dB During T3: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +14dB $Ês_2$ / Noc_2: -4dB Reported SS-RSRP and SS-RSRQ for NR Cell 2	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB +0.3dB During T3: 0dB 0dB 0dB +0.3dB Via mapping	During T1: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +14dB $Ês_2$ / Noc_2: -infinity During T2: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +14dB $Ês_2$ / Noc_2: -3.7dB During T3: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +14dB $Ês_2$ / Noc_2: -3.7dB **Configuration 1 and 2:** RSRP_44 to RSRP_66 RSRQ_44 to RSRQ_65 **Configuration 3:** RSRP_47 to RSRP_69 RSRQ_44 to RSRQ_65
8.2.2.2 E-UTRA – NR FR2 Early Measurement Reporting	During T1: Noc_1: -98dBm/15kHz Noc_2: -107dBm/15kHz $Ês_1$ / Noc_1: +14dB $Ês_2$ / Noc_2: -infinity During T2: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +14dB $Ês_2$ / Noc_2: -4dB During T3: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB +2.6dB During T3: 0dB 0dB	During T1: Noc_1: -98dBm/15kHz Noc_2: -107dBm/15kHz $Ês_1$ / Noc_1: +14dB $Ês_2$ / Noc_2: -infinity During T2: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +14dB $Ês_2$ / Noc_2: -1.4dB During T3: Noc_1: -98dBm/15kHz Noc_2: -98dBm/15kHz

	$\hat{E}s_1$ / Noc_1: +14dB $\hat{E}s_2$ / Noc_2: -4dB Signalled Thresh_X_HighP: 48dB Reported SS-RSRP and SS-RSRQ for NR Cell 2	0dB +2.6dB +3dB Via mapping	$\hat{E}s_1$ / Noc_1: +14dB $\hat{E}s_2$ / Noc_2: -1.4dB 51dB RSRP_28 to RSRP_86 RSRQ_44 to RSRQ_65
8.3.1.1 E-UTRA – NR FR1 handover with known target cell	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: 0dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: 0dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB -1.55dB +1.55dB During T3: 0dB 0dB -1.55dB +1.55dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +5.45dB Ês2 / Noc2: +1.55dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +5.45dB Ês2 / Noc2: +1.55dB
8.4.1.1 E-UTRA – NR FR1 SFTD measurement delay in non-DRX	During T1: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: +4dB	During T1: 0dB 0dB 0dB 0dB	During T1: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: +4dB
8.4.1.2 E-UTRA – NR FR1 SFTD measurement delay in DRX	Same as 8.4.1.1	Same as 8.4.1.1	Same as 8.4.1.1
8.4.2.1 E-UTRA event-triggered reporting of a NR FR1 neighbour cell without SSB time index detection in non-DRX	During T1: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: -infinity During T2: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: +7dB	During T1: 0dB0dB0dB0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: +7dB
8.4.2.2 E-UTRA event-triggered reporting of a NR FR1 neighbour cell without SSB time index detection in DRX	Same as 8.4.2.1	Same as 8.4.2.1	Same as 8.4.2.1
8.4.2.3 E-UTRA event-triggered reporting of a NR FR1 neighbour cell with SSB time index detection in non-DRX	Same as 8.4.2.1	Same as 8.4.2.1	Same as 8.4.2.1
8.4.2.4 E-UTRA event-triggered reporting of a NR FR1 neighbour cell with SSB time index detection in DRX	Same as 8.4.2.1	Same as 8.4.2.1	Same as 8.4.2.1
8.4.2.5 E-UTRA event-triggered reporting of a NR FR2 neighbour cell without SSB time index detection in non-DRX	During T1: Ês2: - Infinity During T2: Ês2: -80.6 dBm/120kHz In signalling:	During T1: 0dB During T2: 0dB In signalling:	During T1: Ês2: - Infinity During T2: Ês2: -80.6 dBm/120kHz In signalling:

	b1-ThresholdNR: -112 dBm/SCS	-6dB	b1-ThresholdNR: -118 dBm/SCS
8.4.2.6 E-UTRA event-triggered reporting of a NR FR2 neighbour cell without SSB time index detection in DRX	During T1: Noc: -104.7dBm/15kHz Ês / Noc: -infinity During T2: Noc: -104.7dBm/15kHz Ês / Noc: +8dB	During T1: 0dB 0dB During T2: 0dB 0dB	During T1: Noc: -104.7dBm/15kHz Ês / Noc: -infinity During T2: Noc: -104.7dBm/15kHz Ês / Noc: +8dB
8.4.2.7 E-UTRA event-triggered reporting of a NR FR2 neighbour cell with SSB time index detection in non-DRX	Same as 8.4.2.6	Same as 8.4.2.6	Same as 8.4.2.6
8.4.2.8 E-UTRA event-triggered reporting of a NR FR2 neighbour cell with SSB time index detection in DRX	Same as 8.4.2.6	Same as 8.4.2.6	Same as 8.4.2.6
8.4.2.9 E-UTRA – NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection in DRX for UE configured with highSpeedInterRAT-NR-r16	During T1: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: -infinity During T2: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: +7dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: -infinity During T2: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: +7dB
8.5.1.1 E-UTRA – NR FR1 SFTD measurement accuracy	Test 1 Ês1 / Noc1: -3dB Ês2 / Noc2: -3dB	Test 1: +0.8dB +0.3dB	Test 1: Ês1 / Noc1: -2.2dB Ês2 / Noc2: -2.7dB
8.5.2.1.1.1 E-UTRA SS-RSRP absolute measurement accuracy of a NR FR1 neighbour cell			
Test Configuration 1,2,4,5	Test 1: N_{oc1}: -94.65 dBm/15kHz Ês1 / N_{oc1}: +10.0dB Reported RSRP values: ±8dB (±3.0dB additionally for extreme conditions) Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: -4.0dB Reported RSRP values: ±4.5dB (±4.5dB additionally for extreme conditions)	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz Ês1 / N_{oc1}: +10.0dB RSRP_62 to RSRP_82 Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: -3.2dB RSRP_30 to RSRP_43 RSRP_31 to RSRP_43 RSRP_31 to RSRP_44 RSRP_32 to RSRP_44 RSRP_32 to RSRP_45 RSRP_33 to RSRP_45 RSRP_33 to RSRP_46 RSRP_34 to RSRP_46 depending on operating band
Test Configuration 3,6	Test 1: N_{oc1}: -94.65 dBm/15kHz Ês1 / N_{oc1}: +10.0dB Reported RSRP values: ±8dB (±3.0dB additionally for extreme conditions) Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: -4.0dB Reported RSRP values: ±4.5dB (±4.5dB additionally for extreme conditions)	Test 1: -1.35dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -96.00dBm/15kHz Ês1 / N_{oc1}: +10.0dB RSRP_64 to RSRP_83 Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: -3.2dB RSRP_33 to RSRP_46 RSRP_34 to RSRP_46 RSRP_34 to RSRP_47 RSRP_35 to RSRP_47

			RSRP_35 to RSRP_48 RSRP_36 to RSRP_48 RSRP_36 to RSRP_49 RSRP_37 to RSRP_49 depending on operating band
8.5.2.1.2 E-UTRA SS-RSRP absolute measurement accuracy of a NR FR2 neighbour cell	Test 1: N_{oc}: -105dBm/15kHz Ês / N_{oc} 11dB Reported RSRP values: ±8dB (±3dB additionally for extreme conditions) Test 2: Ês FR2a PC3: -109.1dBm/SCS Reported RSRP values: ±8dB Ês FR2b PC3: -106.5dBm/SCS Reported RSRP values: ±8dB Ês FR2c PC3: -105.5dBm/SCS Reported RSRP values: ±8dB (±3dB additionally for extreme conditions in all frequency ranges)	Test 1: -0.1dB 0dB Via mapping Test 2: +5.65dB Via mapping +5.65dB Via mapping +5.65dB Via mapping	Test 1: N_{oc}: -105.1dBm/15kHz Ês / N_{oc}: +11.0dB RSRP_48 to RSRP_105 Test 2: Ês: -103.45dBm/SCS RSRP_29 to RSRP_87 Ês: -100.85dBm/SCS RSRP_32 to RSRP_89 Ês: -99.85dBm/SCS RSRP_33 to RSRP_90
8.5.2.2.1 E-UTRA SS-RSRQ absolute measurement accuracy of a NR FR1 neighbour cell			
Test Configuration 1,2,4,5	Test 1: N_{oc1}: -80.18 dBm/15kHz Ês1 / N_{oc1}: -1.75dB Reported RSRQ values: ±2.5dB (±1.5dB additionally for extreme conditions) Test 2: N_{oc1}: -106dBm/15kHz Ês1 / N_{oc1}: -1.75dB Reported RSRQ values: ±2.5dB (±1.5dB additionally for extreme conditions) Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: -1.75dB Reported RSRQ values: ±2.5dB (±1.5dB additionally for extreme conditions)	Test 1: -1.5dB 0dB Via mapping Test 2: 0dB 0dB Via mapping Test 3: 0dB 0dB Via mapping	Test 1: N_{oc1}: -81.68dBm/15kHz Ês1 / N_{oc1}: -1.75dB RSRQ_51 to RSRQ_63 Test 2: N_{oc1}: -106dBm/15kHz Ês1 / N_{oc1}: -1.75dB RSRQ_51 to RSRQ_63 Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: -1.75dB RSRQ_51 to RSRQ_63
Test Configuration 3,6	Test 1: N_{oc1}: -86.27 dBm/15kHz Ês1 / N_{oc1}: -1.75dB Reported RSRQ values: ±2.5dB (±1.5dB additionally for extreme conditions) Test 2: N_{oc1}: -113dBm/15kHz Ês1 / N_{oc1}: -1.75dB Reported RSRQ values: ±2.5dB (±1.5dB additionally for extreme conditions) Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: -1.75dB Reported RSRQ values: ±2.5dB (±1.5dB additionally for extreme conditions)	Test 1: -1.53dB 0dB Via mapping Test 2: 0dB 0dB Via mapping Test 3: 0dB 0dB Via mapping	Test 1: N_{oc1}: -87.80dBm/15kHz Ês1 / N_{oc1}: -1.75dB RSRQ_51 to RSRQ_63 Test 2: N_{oc1}: -113dBm/15kHz Ês1 / N_{oc1}: -1.75dB RSRQ_51 to RSRQ_63 Test 3: N_{oc1}: -116dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: -1.75dB RSRQ_51 to RSRQ_63
8.5.2.2.2 E-UTRA SS-RSRQ absolute	Test 1: N_{oc1}: -105dBm/15kHz	Test 1: 0dB	Test 1: N_{oc1}: -105dBm/15kHz

measurement accuracy of a NR FR2 neighbour cell	$\hat{E}_{s1}$ / N_{oc1}: -0.5dB Reported RSRQ values: ±2.5dB (±1.5dB additionally for extreme conditions) Test 2: N_{oc1} FR2a PC3: -115.1dBm/15kHz N_{oc1} FR2b PC3: -112.5dBm/15kHz N_{oc1} FR2c PC3: -111.5dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: -1.75dB Reported RSRQ values: ±2.5dB (±1.5dB additionally for extreme conditions in all frequency ranges)	0dB Via mapping Test 2: 0dB 0dB 0dB 5.3dB Via mapping	$\hat{E}_{s1}$ / N_{oc1}: -0.5dB RSRQ_23 to RSRQ_95 Test 2: N_{oc1}: -115.1dBm/15kHz N_{oc1}: -112.5dBm/15kHz N_{oc1}: -111.5dBm/SCS $\hat{E}_{s1}$ / N_{oc1}: 3.55dB RSRQ_26 to RSRQ_98
8.5.2.3.1 E-UTRA SS-SINR absolute measurement accuracy of a NR FR1 neighbour cell	Test 1: N_{oc1}: -88 dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: -1.75dB Reported SINR values: ±3dB Test 2: N_{oc1}: -108.5dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: 20dB Reported SINR values: ±3dB Test 3: N_{oc1}: -119.5dBm/15kHz + Δ_{BG_offset} $\hat{E}_{s1}$ / N_{oc1}: -4dB Reported SINR values: ±3.5dB	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0dB Via mapping Test 3: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -88 dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: -1.75dB SINR_35 to SINR_51 Test 2: N_{oc1}: -108.5dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: 20dB SINR_79 to SINR_94 Test 3: N_{oc1}: -119.5dBm/15kHz + Δ_{BG_offset} $\hat{E}_{s1}$ / N_{oc1}: -3.2dB SINR_32 to SINR_49
8.5.2.3.2 E-UTRA SS-SINR absolute measurement accuracy of a NR FR2 neighbour cell	Test 1: N_{oc1}: -105dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: -0.5dB Reported SINR values: ±3dB (±1dB additionally for extreme conditions) Test 2: N_{oc1}: -105dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: 11dB Reported SINR values: ±3dB (±1dB additionally for extreme conditions) Test 3: N_{oc1} FR2a PC3: -115.1dBm/15kHz N_{oc1} FR2b PC3: -112.5dBm/15kHz N_{oc1} FR2c PC3: -111.5dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: -1dB Reported SINR values: ±3dB (±1dB additionally for extreme conditions in all frequency ranges)	Test 1: 0dB 0dB Via mapping Test 2: -0.1dB 0dB Via mapping Test 3: 0dB 0dB 0dB 4.6dB Via mapping	Test 1: N_{oc1}: -105dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: -0.5dB SINR_9 to SINR_82 Test 2: N_{oc1}: -105.1dBm/15kHz $\hat{E}_{s1}$ / N_{oc1}: 11dB SINR_32 to SINR_105 Test 3: N_{oc1}: -115.1dBm/15kHz N_{oc1}: -112.5dBm/15kHz N_{oc1}: -111.5dBm/SCS $\hat{E}_{s1}$ / N_{oc1}: 3.6dB SINR_17 to SINR_90

Table F.1.3.2-6: Derivation of test requirements for FR1 NR sidelink RRM tests

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
9.1.1.1 NR SA FR1 UE transmit timing accuracy for GNSS as synchronization reference source	Sidelink transmit timing error limit: ±12*64 Tc	±3*64 Tc	±15*64 Tc

9.1.1.2 NR SA FR1 UE transmit timing accuracy for SyncRef UE as synchronization reference source	Sidelink transmit timing error limit: ±8*64 Tc Noc = -95 dBm/30 kHz Es_1/Noc = 3 dB	 ±2*64 Tc 0dB 0dB	 ±10*64 Tc Noc = -95 dBm/30 kHz Es_1/Noc = 3 dB
9.1.1.3 NR SA FR1 UE transmit timing accuracy for FR1 NR cell as synchronization reference source	**Uu Test Configuration 1, 2**		
	Sidelink transmit timing error limit: ±12*64 Tc Noc = -98 dBm/15 kHz Es_1/Noc = 3 dB	 ±3*64 Tc 0dB 0dB	 ±15*64 Tc Noc = -98 dBm/15 kHz Es_1/Noc = 3 dB
	Uu Test Configuration 3		
	Sidelink transmit timing error limit: ±10*64 Tc Noc = -98 dBm/15 kHz Es_1/Noc = 3 dB	 ±3*64 Tc 0dB 0dB	 ±13*64 Tc Noc = -98 dBm/15 kHz Es_1/Noc = 3 dB
9.1.2.1 NR SA FR1 initiation/cease of S-SSB transmission for FR1 NR cell as synchronization reference source	**Uu Test Configuration 1, 2**		
	During T1: Noc = -110 dBm/15 kHz Es_1/Noc = 4.50 dB During T2: Noc = -110 dBm/15 kHz Es_1/Noc = -4.50 dB During T3: Noc = -110 dBm/15 kHz Es_1/Noc = 4.50 dB In signaling: syncTxThreshIC = -110.00 dBm/SCS	 -1.55dB 3.10dB -1.55dB 0dB -1.55dB 3.10dB 0dB	During T1: Noc = -111.55 dBm/15 kHz Es_1/Noc = 7.60 dB During T2: Noc = -111.55 dBm/15 kHz Es_1/Noc = -4.50 dB During T3: Noc = -111.55 dBm/15 kHz Es_1/Noc = 7.60 dB syncTxThreshIC = -110.00 dBm/SCS
	Uu Test Configuration 3		
	During T1: Noc = -110 dBm/15 kHz Es_1/Noc = 4.50 dB During T2: Noc = -110 dBm/15 kHz Es_1/Noc = -4.50 dB During T3: Noc = -110 dBm/15 kHz Es_1/Noc = 4.50 dB In signaling: syncTxThreshIC = -110.00 dBm/SCS	 -4.55dB 3.10dB -4.55dB 0dB -4.55dB 3.10dB 0dB	During T1: Noc = -114.55 dBm/15 kHz Es_1/Noc = 7.60 dB During T2: Noc = -114.55 dBm/15 kHz Es_1/Noc = -4.50 dB During T3: Noc = -114.55 dBm/15 kHz Es_1/Noc = 7.60 dB syncTxThreshIC = -110.00 dBm/SCS
9.1.2.2 NR SA FR1 initiation/cease of S-SSB transmission for SyncRef UE as synchronization reference source	During T1: Noc = -98 dBm/30 kHz Es_1/Noc = 5.50 dB During T2: Noc = -98 dBm/30 kHz Es_1/Noc = -3.50 dB During T3: Noc = -98 dBm/30 kHz Es_1/Noc = 5.50 dB In signaling: syncTxThreshOoC = -100.00 dBm/SCS	 -1.35dB 0dB -4.55dB 0dB -1.35dB 0dB 0dB	During T1: Noc = -99.35 dBm/30 kHz Es_1/Noc = 5.50 dB During T2: Noc = -102.55 dBm/30 kHz Es_1/Noc = -3.50 dB During T3: Noc = -99.35 dBm/30 kHz Es_1/Noc = 5.50 dB syncTxThreshOoC = -100.00 dBm/SCS
9.1.3.1 NR SA FR1 synchronization reference selection/reselection	During T1: Noc = -95 dBm/30 kHz Es_1/Noc = 0 dB Es_2/Noc = -infinity	 0dB 0.35dB N/A	During T1: Noc = -95 dBm/30 kHz Es_1/Noc = 0.35 dB Es_2/Noc = -infinity

for GNSS configured as the highest priority synchronization reference source	Es_3/Noc = -infinity During T2: Noc = -95 dBm/30 kHz Es_1/Noc = 0 dB Es_2/Noc = 0 dB Es_3/Noc = -infinity During T3: Noc = -95 dBm/30 kHz Es_1/Noc = 0 dB Es_2/Noc = 0 dB Es_3/Noc = 3 dB	N/A 0dB 0dB 0.35dB N/A 0dB 0dB 0dB 0.35dB	Es_3/Noc = -infinity During T2: Noc = -95 dBm/30 kHz Es_1/Noc = 0 dB Es_2/Noc = 0.35 dB Es_3/Noc = -infinity During T3: Noc = -95 dBm/30 kHz Es_1/Noc = 0 dB Es_2/Noc = 0 dB Es_3/Noc = 3.35 dB
9.1.3.2 NR SA FR1 synchronization reference selection/reselection for FR1 NR Cell configured as the highest priority synchronization reference source	During T1: Noc = -95 dBm/30 kHz Es_1/Noc = -infinity Es_2/Noc = -infinity During T2: Noc = -95 dBm/30 kHz Es_1/Noc = 0 dB Es_2/Noc = -infinity During T3: Noc = -95 dBm/30 kHz Es_1/Noc = 0 dB Es_2/Noc = 0 dB	 0dB N/A N/A 0dB 0.35dB N/A 0dB 0dB 0.35dB	During T1: Noc = -95 dBm/30 kHz Es_1/Noc = -infinity Es_2/Noc = -infinity During T2: Noc = -95 dBm/30 kHz Es_1/Noc = 0.35 dB Es_2/Noc = -infinity During T3: Noc = -95 dBm/30 kHz Es_1/Noc = 0 dB Es_2/Noc = 0.35 dB
9.1.4.1 NR SA FR1 L1 SL-RSRP measurement for autonomous resource selection/reselection	During T1: Noc = -110 dBm/30 kHz Es_i/Noc = 10 dB, i = 20~29 Es_i/Noc = 0 dB, i = 0~19, 30~49 During T2: Noc = -121 dBm/30 kHz Es_i/Noc = 10 dB, i = 20~29 Es_i/Noc = 20 dB, i = 0~19, 30~49 In signaling: SL-Thres-RSRP = -106 dBm/SCS	 0dB 10.55dB 0.35dB 0dB 0dB 10.55dB 6dB	During T1: Noc = -110 dBm/30 kHz Es_i/Noc = 20.55 dB, i = 20~29 Es_i/Noc = 0.35 dB, i = 0~19, 30~49 During T2: Noc = -121 dBm/30 kHz Es_i/Noc = 10 dB, i = 20~29 Es_i/Noc = 30.55 dB, i = 0~19, 30~49 In signaling: SL-Thres-RSRP = -100 dBm/SCS
9.1.4.2 NR SA FR1 L1 SL-RSRP measurement for resource pre-emption	During T1: Noc = -infinity Es_1/Noc = -infinity During T2: Noc = -100 dBm/30 kHz Es_1/Noc = 5 dB In signaling: SL-Thres-RSRP = -106 dBm/SCS	 N/A N/A 0dB 0dB 0dB	During T1: Noc = -infinity Es_1/Noc = -infinity During T2: Noc = -100 dBm/30 kHz Es_1/Noc = 5 dB In signaling: SL-Thres-RSRP = -106 dBm/SCS
9.1.4.3 NR SA FR1 L1 SL-RSRP measurement for resource re-evaluation	During T1: Noc = -103 dBm/30 kHz Es_i/Noc = 12dB, i = 0~29 Es_i/Noc = 2 dB, i = 30~49 Es_i/Noc = 25.50 dB, i = 50~64, 85~99 Es_i/Noc = 12 dB, i = 65~84 Es_i/Noc = -infinity, i = 100~129 During T2: Noc = -103 dBm/30 kHz Es_i/Noc = -infinity, i = 0~29	 -7.05dB 2.1dB 0dB 7.1dB 2.1dB N/A -7.05dB N/A	During T1: Noc = -110.05 dBm/30 kHz Es_i/Noc = 14.1 dB, i = 0~29 Es_i/Noc = 2 dB, i = 30~49 Es_i/Noc = 32.60 dB, i = 50~64, 85~99 Es_i/Noc = 14.1 dB, i = 65~84 Es_i/Noc = -infinity, i = 100~129 During T2: Noc = -110.05 dBm/30 kHz Es_i/Noc = -infinity, i = 0~29

	Es_i/Noc = 2 dB, i = 30~49 Es_i/Noc = 25.5 dB, i = 50~64, 85~99 Es_i/Noc = 12 dB, i = 65~84 Es_i/Noc = 25.5dB, i = 100~129 In signaling: SL-Thres-RSRP = -96 dBm/SCS	0dB 7.1dB 2.1dB 7.55dB -6dB	Es_i/Noc = 2 dB, i = 30~49 Es_i/Noc = 32.60 dB, i = 50~64, 85~99 Es_i/Noc = 14.1 dB, i = 65~84 Es_i/Noc = 33.05dB, i = 100~129 In signaling: SL-Thres-RSRP = -102 dBm/SCS
9.1.5.1 NR SA FR1 congestion control measurement for concurrent operation	During T1: Noc = -103 dBm/30kHz Es_i/Noc = 4.35 dB, i = 0,1,2,3 During T2: Noc = -103 dBm/30kHz Es_i/Noc = 10.32 dB, i = 0,1,2,3 In signaling: threshS-RSSI-CBR = -74 dBm/subchannel	 -1.55dB 0dB -1.55dB 3.30dB 0dB	During T1: Noc = -104.55 dBm/30kHz Es_i/Noc = 4.35 dB, i = 0,1,2,3 During T2: Noc = -104.55 dBm/30kHz Es_i/Noc = 13.62 dB, i = 0,1,2,3 In signaling: threshS-RSSI-CBR = -74 dBm/subchannel
9.1.5.2 NR SA FR1 congestion control measurement for PC5-only operation	Same as 9.1.5.1	Same as 9.1.5.1	Same as 9.1.5.1
9.1.6.1 NR SA FR1 interruption to WAN due to NR sidelink communication	N/A	N/A	N/A

Table F.1.3.2-7: Derivation of test requirements for NR SA FR1 RRM tests for RedCap

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
16.1.1.1 NR SA FR1 Cell reselection for 1 Rx UE	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: +13dB $Qoffset_{s,n}$ = 0dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0.45dB During T3: 0dB 0.45dB 0dB In signalling -1dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16.45dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +16.45dB Ês2 / Noc: +13dB $Qoffset_{s,n}$ = -1dB
16.1.1.2 NR SA FR1 Cell reselection for 2 Rx UE	Same as 6.1.1.1	Same as 6.1.1.1	Same as 6.1.1.1
16.1.1.3 NR SA FR1-FR1 Cell reselection for 1 Rx UE	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -4dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity	During T1: 0dB -4dB 1.6dB 0.3dB During T2: 0dB 0dB 1.6dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -102dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: -3.7dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: -infinity

	During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: +12dB	During T3: 0dB 0dB 1.6dB 1.6dB	During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: 13.6dB
16.1.1.4 NR SA FR1-FR1 Cell reselection for 2 Rx UE	Same as 6.1.1.2	Same as 6.1.1.2	Same as 6.1.1.2
16.1.1.5 NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16dB During T2: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: +13dB In signalling: $Qoffset_{s,n}$ = 0dB SintrasearchP = 60dB SSearchDeltaP = 3dB	During T1: 0dB 0dB 0.45dB During T2: 0dB 0.45dB 0dB -1dB 2dB 3dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16.45dB During T2: Noc: -98dBm/15kHz Ês1 / Noc: +16.45dB Ês2 / Noc: +13dB In signalling: $Qoffset_{s,n}$ = -1dB SintrasearchP = 62dB SSearchDeltaP = 6dB
16.1.1.6 NR SA FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	Same as 6.1.1.4	Same as 6.1.1.4	Same as 6.1.1.4
16.1.1.7 NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE	During T1: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: -4dB During T2: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: +12dB In signalling: Thresh_X_HighP of Cell 1 = 48dB Thresh_X_HighP of Cell 2 = 48dB Thresh_X_LowP of Cell 1 = 50dB Thresh_X_LowP of Cell 2 = 50dB Thresh_Serving_LowP of Cell 1 = 44dB Thresh_Serving_LowP of Cell 2 = 44dB SSearchDeltaP of Cell 1 = 3dB SSearchDeltaP of Cell 2 = 3dB	During T1: 0dB 0dB 0dB 0.3dB During T2: 0dB 0dB 0dB -2.25dB In signalling: 0dB -4dB -2dB 0dB 0dB 2dB 0dB 12dB	During T1: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: -3.7dB During T2: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc1: -98dBm/15kHz Ês2 / Noc2: +9.75dB In signalling: Thresh_X_HighP of Cell 1 = 48dB Thresh_X_HighP of Cell 2 = 44dB Thresh_X_LowP of Cell 1 = 48dB Thresh_X_LowP of Cell 2 = 50dB Thresh_Serving_LowP of Cell 1 = 44dB Thresh_Serving_LowP of Cell 2 = 46dB SSearchDeltaP of Cell 1 = 3dB SSearchDeltaP of Cell 2 = 15dB
16.1.1.8 NR SA FR1-FR1 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	Same as 6.1.1.5	Same as 6.1.1.5	Same as 6.1.1.5
16.1.2.1 NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 1 RX UE	During T1: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz	During T1: 0dB 0dB 0dB 0dB During T2: 0dB	During T1: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz

	Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: +12dB During T3: Noc1: -98dBm/15kHz Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: -4dB Qrxlevmin of Cell 2: -141	0dB 0dB 1.6dB During T2: 0dB 1.6dB -2dB 0.4dB In signalling: +1dB	Ês1 / Noc1: +14dB Noc2: -98dBm/15kHz Ês2 / Noc2: +13.6dB During T3: Noc1: -98dBm/15kHz Ês1 / Noc1: +15.6dB Noc2: -100dBm/15kHz Ês2 / Noc2: -3.6dB Qrxlevmin of Cell 2: -140
16.1.2.2 NR SA FR1 - E-UTRA Cell reselection to higher priority E-UTRA for 2 RX UE	Same as 6.1.2.1	Same as 6.1.2.1	Same as 6.1.2.1
16.1.2.3 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 1 RX UE	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -4dB Ês2 / Noc2: +14dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +12dB Ês2 / Noc2: +14Db Qrxlevmin of Cell 1: 140 (137)	During T1: -2dB 0dB 0.4dB 1.6dB During T2: 0dB 0dB 1.6dB 0dB In signalling: +1dB	During T1: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -3.6dB Ês2 / Noc2: +15.6dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +13.6dB Ês2 / Noc2: +14dB Qrxlevmin of Cell 1: 139 (136)
16.1.2.4 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for 2 RX UE	Same as 6.1.2.2	Same as 6.1.2.2	Same as 6.1.2.2
16.1.2.5 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE	Same as 16.1.2.5	Same as 16.1.2.5	Same as 16.1.2.5
16.1.2.6 NR SA FR1 - E-UTRA Cell reselection to lower priority E-UTRA for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	Same as 6.1.2.2	Same as 6.1.2.2	Same as 6.1.2.2
16.2.1.1 NR SA FR1 CG-SDT for 1 Rx UE	During T1: Noc = -100 dBm/15kHz Es/Noc = 0dB During T2: Noc = -100 dBm/15kHz Es/Noc = 12dB During T3: Noc = -100 dBm/15kHz Es/Noc = 0dB During T4: Noc = -100 dBm/15kHz Es/Noc = 14dB During T5: Noc = -100 dBm/15kHz Es/Noc = 14dB During T6: Noc =-100 dBm/15kHz	During T1: 0 dB 0 dB During T2: 0 dB 0.43 dB During T3: 0 dB 0 dB During T4: 0 dB 0 dB During T5: 0 dB 0 dB During T6: 0 dB	During T1: Noc = -100 dBm/15kHz Es/Noc = 0dB During T2: Noc = -100 dBm/15kHz Es/Noc = 12.43dB During T3: Noc = -100 dBm/15kHz Es/Noc = 0dB During T4: Noc = -100 dBm/15kHz Es/Noc = 14dB During T5: Noc = -100 dBm/15kHz Es/Noc = 14dB During T6: Noc = -100 dBm/15kHz

	Es/Noc = 0dB In Signaling cg-SDT-RSRP-ChangeThreshold = 8dB cg-SDT-RSRP-ThresholdSSB = -110 dBm/SCS	-0.43 dB In Signaling 0 dB -5 dB for Config 1,2,4 -2 dB for Config 3	Es/Noc = -0.43dB In Signaling cg-SDT-RSRP-ChangeThreshold = 8dB cg-SDT-RSRP-ThresholdSSB = -115 dBm/SCS for config 1,2 & 4 -112 dBm/SCS for config 3
16.2.1.2 NR SA FR1 CG-SDT for 2 Rx UE	Same as 6.2.1	Same as 6.2.1	Same as 6.2.1
16.3.1.1 NR SA FR1 handover with known target cell for 1 Rx UE	During T1 Noc: -98 dBm/15kHz Es1/Noc: 0 dB Es2/Noc: -infinity During T2 Noc: -98 dBm/15kHz Es1/Noc: 0 dB Es2/Noc: 11 dB During T3 Noc: -98 dBm/15kHz Es1/Noc: 0 dB Es2/Noc: 11 dB In signalling A3-Offset 0 dB	 0 dB 0 dB 0 dB 0 dB 0 dB -1.85dB 0 dB 0 dB -1.85dB -2.5dB	During T1 Noc: -98 dBm/15kHz Es1/Noc: 0 dB Es2/Noc: -infinity During T2 Noc: -98 dBm/15kHz Es1/Noc: 0 dB Es2/Noc: 9.15 dB During T3 Noc: -98 dBm/15kHz Es1/Noc: 0 dB Es2/Noc: 19.15 dB In signalling A3-Offset -2.5 dB
16.3.1.2 NR SA FR1 handover with known target cell for 2 Rx UE	Same as 6.3.1.1	Same as 6.3.1.1	Same as 6.3.1.1
16.3.1.3 NR SA FR1 handover with unknown target cell for 1 Rx UE	Same as 6.3.1.2	Same as 6.3.1.2	Same as 6.3.1.2
16.3.1.4 NR SA FR1 handover with unknown target cell for 2 Rx UE	Same as 6.3.1.2	Same as 6.3.1.2	Same as 6.3.1.2
16.3.1.5 NR SA FR1-FR1 handover with unknown target cell for 1 Rx UE	Same as 6.3.1.3	Same as 6.3.1.3	Same as 6.3.1.3
16.3.1.6 NR SA FR1-FR1 handover with unknown target cell for 2 Rx UE	Same as 6.3.1.3	Same as 6.3.1.3	Same as 6.3.1.3
16.3.1.7 NR SA FR1 - E-UTRA handover with known target cell for 1 Rx UE	During T1: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +12dB Ês2 / Noc2: -infinity During T2: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +8dB During T3: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +8dB In Signaling b2-Threshold1: -96dBm for NR SCS 15kHz and -93dBm for NR SCS 30kHz	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 2.55dB During T3: 0dB 0dB 0dB 0dB 3dB	During T1: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +12dB Ês2 / Noc2: -infinity During T2: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +10.55dB During T3: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +8dB In Signaling b2-Threshold1: -93dBm for NR SCS 15kHz and -90dBm for NR SCS 30kHz

16.3.1.8 NR SA FR1 - E-UTRA handover with known target cell for 2Rx UE	Same as 6.3.1.4	Same as 6.3.1.4	Same as 6.3.1.4
16.3.1.9 NR - E-UTRA handover with unknown target cell for 1 Rx UE	Same as 6.3.1.5	Same as 6.3.1.5	Same as 6.3.1.5
16.3.1.10 NR - E-UTRA handover with unknown target cell for 2 Rx UE	Same as 6.3.1.5	Same as 6.3.1.5	Same as 6.3.1.5
16.3.2.1.1 NR SA FR1 RRC Re-establishment for 1 Rx UE	Same as 6.3.2.1.1	Same as 6.3.2.1.1	Same as 6.3.2.1.1
16.3.2.1.2 NR SA FR1 RRC Re-establishment for 2 Rx UE	Same as 6.3.2.1.1	Same as 6.3.2.1.1	Same as 6.3.2.1.1
16.3.2.1.3 NR SA FR1-FR1 RRC Re-establishment for 1 Rx UE	Same as 6.3.2.1.2	Same as 6.3.2.1.2	Same as 6.3.2.1.2
16.3.2.1.4 NR SA FR1-FR1 RRC Re-establishment for 2 Rx UE	Same as 6.3.2.1.2	Same as 6.3.2.1.2	Same as 6.3.2.1.2
16.3.2.1.5 NR SA FR1 RRC Re-establishment for 1 Rx UE without serving cell timing	Same as 6.3.2.1.3	Same as 6.3.2.1.3	Same as 6.3.2.1.3
16.3.2.1.6 NR SA FR1 RRC Re-establishment for 2 Rx UE without serving cell timing	Same as 6.3.2.1.3	Same as 6.3.2.1.3	Same as 6.3.2.1.3
16.3.2.2.1 NR SA FR1 4-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE	TEST CONFIGURATION 1,4 Noc: -98dBm/15kHz Es0/Noc: 3dB Es1/Noc:-17dB First PRACH preamble transmit power: -22dBm Absolute power tolerance ± 9dB Relative power tolerance: ± 2.5dB PRACH transmit timing error ± 768*Tc In signalling rsrp-ThresholdSSB: -105dB	 0dB 1.55dB 0dB Via calculating ± 11.1dB ±0.7dB ±112Tc 0dB	 Noc: -98dBm/15kHz Es0/Noc: 4.55dB Es1/Noc:-17dB First PRACH preamble transmit power: -23.55dBm Absolute power tolerance ± 20.1dB Relative power tolerance: ± 3.2dB PRACH transmit timing error ± 880*Tc In signalling rsrp-ThresholdSSB: -105dB
	TEST CONFIGURATION 2 Noc: -98dBm/15kHz Es0/Noc: 3dB Es1/Noc:-17dB First PRACH preamble transmit power: -25dBm Absolute power tolerance ± 9dB Relative power tolerance: ± 2.5dB PRACH transmit timing error ± 768*Tc In signalling rsrp-ThresholdSSB: -105dB	 0dB 1.55dB 0dB Via calculating ± 11.1dB ±0.7dB ±112Tc 0dB	 Noc: -98dBm/15kHz Es0/Noc: 4.55dB Es1/Noc:-17dB First PRACH preamble transmit power: -26.55dBm Absolute power tolerance ± 20.1dB Relative power tolerance: ± 3.2dB PRACH transmit timing error ± 880*Tc In signalling rsrp-ThresholdSSB: -105dB
	TEST CONFIGURATION 3		

	Noc: -101dBm/15kHz Es0/Noc: 3dB Es1/Noc:-17dB First PRACH preamble transmit power: -22dBm Absolute power tolerance ± 9dB Relative power tolerance: ± 2.5dB PRACH transmit timing error ± 768*Tc In signalling rsrp-ThresholdSSB: -105dB	0dB 1.55dB 0dB Via calculating ± 11.1dB ±0.7dB ±112Tc 0 dB	Noc: -101dBm/15kHz Es0/Noc: 4.55dB Es1/Noc:-17dB First PRACH preamble transmit power: -23.55dBm Absolute power tolerance ± 20.1dB Relative power tolerance: ± 3.2dB PRACH transmit timing error ± 624*Tc In signalling rsrp-ThresholdSSB: -105dB
16.3.2.2.2 NR SA FR1 4-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.2.3 NR SA FR1 4-step RA type non-contention based random access test in FR1 for NR standalone for 1 Rx UE	Same as 16.3.2.2.1	Same as 16.3.2.2.1	Same as 16.3.2.2.1
16.3.2.2.4 NR SA FR1 4-step RA type non-contention based random access test in FR1 for NR standalone for 2 Rx UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.2.5 NR SA FR1 2-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE	TEST CONFIGURATION 1,4 Noc: -98dBm/15kHz Es0/Noc: 3dB Es1/Noc:-17dB First PRACH preamble transmit power: -22dBm First MsgA PUSCH transmit power: 6.6 dBm Absolute power tolerance ± 9dB Relative power tolerance: ± 2.5dB PRACH transmit timing error ± 768*Tc In signalling rsrp-ThresholdSSB: -105dB	0dB 1.55dB 0dB Via calculating Via calculating 0dB ± 11.1dB ±0.7dB ±112Tc 0dB	Noc: -98dBm/15kHz Es0/Noc: 4.55dB Es1/Noc:-17dB First PRACH preamble transmit power: -23.55dBm First MsgA PUSCH transmit power: 6.6 dBm Absolute power tolerance ± 20.1dB Relative power tolerance: ± 3.2dB PRACH transmit timing error ± 880*Tc In signalling rsrp-ThresholdSSB: -105dB
	TEST CONFIGURATION 2 Noc: -98dBm/15kHz Es0/Noc: 3dB Es1/Noc:-17dB First PRACH preamble transmit power: -25dBm First MsgA PUSCH transmit power: 6.6 dBm Absolute power tolerance	0dB 1.55dB 0dB Via calculating ± 11.1dB Via calculating 0 dB	Noc: -98dBm/15kHz Es0/Noc: 4.55dB Es1/Noc:-17dB First PRACH preamble transmit power: -26.55dBm First MsgA PUSCH transmit power: 6.6 dBm Absolute power tolerance

	± 9dB Relative power tolerance: ± 2.5dB PRACH transmit timing error ± 768*Tc In signalling rsrp-ThresholdSSB: -105dB	± 11.1dB ±0.7dB ±112Tc 0dB	± 20.1dB Relative power tolerance: ± 3.2dB PRACH transmit timing error ± 880*Tc In signalling rsrp-ThresholdSSB: -105dB
	TEST CONFIGURATION 3 Noc: -101dBm/15kHz Es0/Noc: 3dB Es1/Noc:-17dB First PRACH preamble transmit power: -22dBm First MsgA PUSCH transmit power: 9.6 dBm Absolute power tolerance ± 9dB Relative power tolerance: ± 2.5dB PRACH transmit timing error ± 768*Tc In signalling rsrp-ThresholdSSB: -105dB	 0dB 1.55dB 0dB Via calculating Via calculating ± 11.1dB ±0.7dB ±112Tc 0 dB	 Noc: -101dBm/15kHz Es0/Noc: 4.55dB Es1/Noc:-17dB First PRACH preamble transmit power: -23.55dBm First MsgA PUSCH transmit power: 9.6 dBm Absolute power tolerance ± 20.1dB Relative power tolerance: ± 3.2dB PRACH transmit timing error ± 624*Tc In signalling rsrp-ThresholdSSB: -105dB
16.3.2.2.6 NR SA FR1 2-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.2.7 NR SA FR1 2-step RA type non-contention based test in FR1 for NR standalone for 1 RX UE	TEST CONFIGURATION 1 Noc: -101dBm/15kHz Es0/Noc: 3dB Es1/Noc:-17dB First PRACH preamble transmit power: -22dBm First MsgA PUSCH transmit power: 9.6 dBm Absolute power tolerance ± 9dB Relative power tolerance: ± 2.5dB PRACH transmit timing error ± 768*Tc In signalling rsrp-ThresholdSSB: -105dB	 0dB 1.55dB 0dB Via calculating Via calculating ± 11.1dB ±0.7dB ±112Tc 0 dB	 Noc: -101dBm/15kHz Es0/Noc: 4.55dB Es1/Noc:-17dB First PRACH preamble transmit power: -23.55dBm First MsgA PUSCH transmit power: 9.6 dBm Absolute power tolerance ± 20.1dB Relative power tolerance: ± 3.2dB PRACH transmit timing error ± 624*Tc In signalling rsrp-ThresholdSSB: -105dB
	TEST CONFIGURATION 2 Noc: -98dBm/15kHz Es0/Noc: 3dB Es1/Noc:-17dB First PRACH preamble transmit power: -22dBm	 0dB 1.55dB 0dB Via calculating	 Noc: -98dBm/15kHz Es0/Noc: 4.55dB Es1/Noc:-17dB First PRACH preamble transmit power: -23.55dBm

	First MsgA PUSCH transmit power: 6.6 dBm Absolute power tolerance ± 9dB Relative power tolerance: ± 2.5dB PRACH transmit timing error ± 768*Tc In signalling rsrp-ThresholdSSB: -105dB	Via calculating 0dB ± 11.1dB ±0.7dB ±112Tc 0dB	First MsgA PUSCH transmit power: 6.6 dBm Absolute power tolerance ± 20.1dB Relative power tolerance: ± 3.2dB PRACH transmit timing error ± 880*Tc In signalling rsrp-ThresholdSSB: -105dB
16.3.2.2.8 NR SA FR1 2-step RA type non-contention based test in FR1 for NR standalone for 2 RX UE	Same as 6.3.2.2.1	Same as 6.3.2.2.1	Same as 6.3.2.2.1
16.3.2.3.1 NR SA FR1-FR1 RRC connection release with redirection for 1 Rx UE	Same as 6.3.2.3.1	Same as 6.3.2.3.1	Same as 6.3.2.3.1
16.3.2.3.2 NR SA FR1-FR1 RRC connection release with redirection for 2 Rx UE	Same as 6.3.2.3.1	Same as 6.3.2.3.1	Same as 6.3.2.3.1
16.3.2.3.3 NR SA FR1 - E-UTRA RRC connection release with redirection for 1 Rx UE	Same as 6.3.2.3.2	Same as 6.3.2.3.2	Same as 6.3.2.3.2
16.3.2.3.4 NR SA FR1 - E-UTRA RRC connection release with redirection for 2 Rx UE	Same as 6.3.2.3.2	Same as 6.3.2.3.2	Same as 6.3.2.3.2
16.4.1.1 NR SA FR1 NR UE Transmit Timing accuracy for 1 Rx UE	Same as 6.4.1.1	Same as 6.4.1.1	Same as 6.4.1.1
16.4.1.2 NR SA FR1 NR UE Transmit Timing accuracy for 2 Rx UE	Same as 6.4.1.1	Same as 6.4.1.1	Same as 6.4.1.1
16.4.3.1 NR SA FR1 timing advance adjustment accuracy for 1 Rx UE	Same as 6.4.3.1	Same as 6.4.3.1	Same as 6.4.3.1
16.4.3.2 NR SA FR1 timing advance adjustment accuracy for 2 Rx UE	Same as 6.4.3.1	Same as 6.4.3.1	Same as 6.4.3.1
16.5.1.1 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered
16.5.1.2 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered
16.5.1.3 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered
16.5.1.4 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered
16.5.1.5 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception:	Same as 6.5.1.1 with the exception: - 4Rx is not considered

with SSB-based RLM RS in DRX mode for 1 Rx UE		- 4Rx is not considered	
16.5.1.6 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered
16.5.1.7 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered
16.5.1.8 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered
16.5.1.9 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered
16.5.1.10 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered
16.5.1.11 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered
16.5.1.12 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered
16.5.1.13 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered
16.5.1.14 NR SA FR1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered	Same as 6.5.1.1 with the exception: - 4Rx is not considered
16.5.1.15 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered
16.5.1.16 NR SA FR1 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered	Same as 6.5.1.2 with the exception: - 4Rx is not considered
16.5.2.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 1 Rx UE	Same ad 16.5.2.3	Same ad 16.5.2.3	Same ad 16.5.2.3
16.5.2.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based	Same as 6.5.5.1 with the exception: - 4Rx is not considered	Same as 6.5.5.1 with the exception: - 4Rx is not considered	Same as 6.5.5.1 with the exception: - 4Rx is not considered

BFD and LR in non-DRX mode for 2 Rx UE			
16.5.2.3 NR SA FR1 SSB-based beam failure detection and link recovery in DRX mode for 1 Rx UE	q0 SSB SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB q1 SSB at T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 SSB at T2: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 SSB at T3-5: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +10dB	Offset during: T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: -0.8dB q1 SSB at T1: 0dB -3.25dB q1 SSB at T2: 0dB -3.25dB q1 SSB at T3-5: 0dB +3.25dB	SNR during: T1: +5.8dB T2: -2.2dB T3: -12.8dB T4: -12.8dB T5: -12.8dB q1 SSB at T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -13.25dB q1 SSB at T2: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -13.25dB q1 SSB at T3-5: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +13.25dB
16.5.2.4 NR SA FR1 SSB-based beam failure detection and link recovery in DRX mode for 2 Rx UE	Same as 6.5.5.1 with the exception: - 4Rx is not considered	Same as 6.5.5.1 with the exception: - 4Rx is not considered	Same as 6.5.5.1 with the exception: - 4Rx is not considered
16.5.2.5 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 1 Rx UE	q0 CSI-RS SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB q1 CSI-RS during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 CSI-RS during T2: Noc_2: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 CSI-RS during T3-5: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +10dB	Offset during: T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: -0.8dB q1 CSI-RS during T1: 0dB -3.25dB q1 CSI-RS during T2: 0dB -3.25dB q1 CSI-RS during T3-5: 0dB +3.25dB	SNR during: T1: +5.8dB T2: -2.2dB T3: -12.8dB T4: -12.8dB T5: -12.8dB q1 CSI-RS during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -13.25dB q1 CSI-RS during T2: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -13.25dB q1 CSI-RS during T3-5: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +13.25dB
16.5.2.6 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE	Same as 6.5.5.3 with the exception: - 4Rx is not considered	Same as 6.5.5.3 with the exception: - 4Rx is not considered	Same as 6.5.5.3 with the exception: - 4Rx is not considered
16.5.2.7 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 1 Rx UE	Same ad 16.5.2.5	Same as 16.5.2.5	Same ad 16.5.2.5
16.5.2.8 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE	Same as 6.5.5.3 with the exception: - 4Rx is not considered	Same as 6.5.5.3 with the exception: - 4Rx is not considered	Same as 6.5.5.3 with the exception: - 4Rx is not considered

16.5.3.1.1 NR SA FR1 DCI-based DL active BWP switch in non-DRX for 1 Rx UE	Same as 6.5.6.1.2	Same as 6.5.6.1.2	Same as 6.5.6.1.2
16.5.3.1.2 NR SA FR1 DCI-based DL active BWP switch in non-DRX for 2 Rx UE	Same as 6.5.6.1.2	Same as 6.5.6.1.2	Same as 6.5.6.1.2
16.5.3.2.1 NR SA FR1 RRC-based DL active BWP switch in non-DRX for 1 Rx UE	Same as 6.5.6.2.1	Same as 6.5.6.2.1	Same as 6.5.6.2.1
16.5.3.2.2 NR SA FR1 RRC-based DL active BWP switch in non-DRX for 2 Rx UE	Same as 6.5.6.2.1	Same as 6.5.6.2.1	Same as 6.5.6.2.1
16.5.4.1 NR SA FR1 UE specific CBW change on PCell in non-DRX for 1 Rx UE	Same as 6.5.8.1	Same as 6.5.8.1	Same as 6.5.8.1
16.5.4.2 NR SA FR1 UE specific CBW change on PCell in non-DRX for 2 Rx UE	Same as 6.5.8.1	Same as 6.5.8.1	Same as 6.5.8.1
16.6.1.1 NR SA FR1 Event triggered reporting tests without gap under non-DRX for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.2 NR SA FR1 Event triggered reporting tests without gap under non-DRX for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.3 NR SA FR1 Event triggered reporting tests without gap under DRX for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.4 NR SA FR1 Event triggered reporting tests without gap under DRX for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.5 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.6 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.7 NR SA FR1 Event triggered reporting tests with per-UE gaps under DRX for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.8 NR SA FR1 Event triggered reporting tests with per-UE gaps under DRX for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.9 NR SA FR1 Event triggered reporting tests without gap under non-DRX with SSB index reading for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.10 NR SA FR1 Event triggered reporting tests without gap under non-DRX with SSB index reading for 2 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.11 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 1 Rx UE	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
16.6.1.12 NR SA FR1 Event triggered reporting tests with per-UE gaps under non-DRX	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1

with SSB index reading for 2 Rx UE			
16.6.2.1 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: -infinity During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: +7.00dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: -infinity During T2: Freq 1 Noc: -98dBm/15kHz Freq 2 Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc: +7.00dB
16.6.2.2 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.3 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE	Same as 16.6.2.1	Same as 16.6.2.1	Same as 16.6.2.1
16.6.2.4 NR SA FR1-FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.5 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 1 Rx UE	Same as 16.6.2.1	Same as 16.6.2.1	Same as 16.6.2.1
16.6.2.6 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.7 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 1 Rx UE	Same as 16.6.2.1	Same as 16.6.2.1	Same as 16.6.2.1
16.6.2.8 NR SA FR1-FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.9 NR SA FR1-FR1 Event triggered reporting tests with additional mandatory gap pattern for 1 Rx UE	Same as 16.6.2.1	Same as 16.6.2.1	Same as 16.6.2.1
16.6.2.10 NR SA FR1-FR1 Event triggered reporting tests with additional mandatory gap pattern for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
16.6.2.11 NR SA FR1-FR1 Event triggered reporting tests for FR1 when DRX is used for 1 Rx UE	Same as 16.6.2.1	Same as 16.6.2.1	Same as 16.6.2.1
16.6.2.12 NR SA FR1-FR1 Event triggered reporting tests for FR1 when DRX is used for 2 Rx UE	Same as 6.6.2.1	Same as 6.6.2.1	Same as 6.6.2.1
16.6.3.1 NR - E-UTRA event-triggered reporting in non-DRX for 1 Rx UE	During T1: Freq 1 Noc: -104dBm/15kHz Freq 2 Noc: -104dBm/15kHz Ês1 / Noc: +16.00dB	During T1: 0dB 0dB +3.55dB	During T1: Freq 1 Noc: -104dBm/15kHz Freq 2 Noc: -104dBm/15kHz Ês1 / Noc: +19.55dB

	Ês2 / Noc: -infinity During T2: Freq 1 Noc: -104dBm/15kHz Freq 2 Noc: -104dBm/15kHz Ês1 / Noc: 0dB Ês2 / Noc: +17.00dB In signaling: Configs 1,2,4,5: b2-Threshold1 = -96dBm b2-Threshold2EUTRAN = -95dBm Configs 3,6: b2-Threshold1 = -93dBm b2-Threshold2EUTRAN = -95dBm	0dB During T2: 0dB 0dB -1.55dB +1.55dB In signaling: Configs 1,2,4,5: +1dB -1dB Configs 3,6: +1dB -1dB	Ês2 / Noc: -infinity During T2: Freq 1 Noc: -104dBm/15kHz Freq 2 Noc: -104dBm/15kHz Ês1 / Noc: -1.55dB Ês2 / Noc: +18.55dB In signaling: Configs 1,2,4,5: b2-Threshold1 = -95dBm b2-Threshold2EUTRAN = -96dBm Configs 3,6: b2-Threshold1 = -92dBm b2-Threshold2EUTRAN = -96dBm
16.6.3.2 NR - E-UTRA event-triggered reporting in non-DRX for 2 Rx UE	During T1: Freq 1 Noc: -104dBm/15kHz Freq 2 Noc: -104dBm/15kHz Ês1 / Noc: +16.00dB Ês2 / Noc: -infinity During T2: Freq 1 Noc: -104dBm/15kHz Freq 2 Noc: -104dBm/15kHz Ês1 / Noc: 0dB Ês2 / Noc: +17.00dB	During T1: 0dB 0dB +1.55dB 0dB During T2: 0dB 0dB -1.55dB +1.55dB	During T1: Freq 1 Noc: -104dBm/15kHz Freq 2 Noc: -104dBm/15kHz Ês1 / Noc: +17.55dB Ês2 / Noc: -infinity During T2: Freq 1 Noc: -104dBm/15kHz Freq 2 Noc: -104dBm/15kHz Ês1 / Noc: -1.55dB Ês2 / Noc: +18.55dB
16.6.3.3 NR - E-UTRA event-triggered reporting in DRX for 1 Rx UE	Same as 16.6.3.1	Same as 16.6.3.1	Same as 16.6.3.1
16.6.3.4 NR - E-UTRA event-triggered reporting in DRX for 2 Rx UE	Same as 16.6.3.2	Same as 16.6.3.2	Same as 16.6.3.2
16.6.4.1 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for 1 Rx UE	During T1: Noc: -94.65 dBm/15kHz Es1/Noc: 0 dB Es2/Noc: -infinity During T2: Noc: -94.65 dBm/15kHz Es1/Noc: 0 dB Es2/Noc: 3 dB Test Configuration 1,2,4 Reported SSB#1 absolute L1-RSRP values: -88.15 ± 13.03 dBm/SCS Reported SSB#0 differential L1-RSRP values: -6.5 ± 6.42 dB Test Configuration 3 Reported SSB#1 absolute L1-RSRP values: -85.15 ± 13.03 dBm/SCS Reported SSB#0 differential L1-RSRP values: -6.5 ± 6.42 dB	0 dB 0 dB 0 dB 0 dB 0 dB 3.5 dB Via mapping	During T1: Noc: -94.65 dBm/15kHz Es1/Noc: 0 dB Es2/Noc: -infinity During T2: Noc: -94.65 dBm/15kHz Es1/Noc: 0 dB Es2/Noc: 6.5 dB Test Configuration 1,2,4 Reported SSB#1 absolute L1-RSRP Range: RSRP_55 to RSRP_81 Reported SSB#0 differential L1-RSRP range: DIFFRSRP_0 to DIFFRSRP_6 Test Configuration 3 Reported SSB#1 absolute L1-RSRP Range: RSRP_58 to RSRP_84 Reported SSB#0 differential L1-RSRP range: DIFFRSRP_0 to DIFFRSRP_6
16.6.4.2 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used for 2 Rx UE	Same as 6.6.4.1	Same as 6.6.4.1	Same as 6.6.4.1 with following exceptions: - Test requirements for configuration 1,2 also apply to configuration 4

16.6.4.3 NR SA FR1 SSB based L1-RSRP measurement when DRX is used for 1 Rx UE	Same as 16.6.4.1	Same as 16.6.4.1	Same as 16.6.4.1
16.6.4.4 NR SA FR1 SSB based L1-RSRP measurement when DRX is used for 2 Rx UE	Same as 6.6.4.1	Same as 6.6.4.1	Same as 6.6.4.1 with following exceptions: - Test requirements for configuration 1,2 also apply to configuration 4
16.6.4.5 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for 1 Rx UE	Noc: -94.65dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +3.00dB Reported CSI-RSRP values ± 13.03dB Reported Differential CSI-RSRP values ± 6.42dBSame as 6.6.4.3	0dB 0dB 3.5dB Via mappingSame as 6.6.4.3	Noc: -94.65dBm/15kHz $\hat{E}s_0$ / Noc: 0.00dB $\hat{E}s_1$ / Noc: +6.50dB **For configuration 1,2,4** CSI-RS#1: RSRP_55 to RSRP_81 CSI-RS#0: DIFFRSRP_0 to DIFFRSRP_6 **For configuration 3** CSI-RS#1: RSRP_58 to RSRP_84 CSI-RS#0: DIFFRSRP_0 to DIFFRSRP_6Same as 6.6.4.3 with following exceptions: - Test requirements for configuration 1,2 also apply to configuration 4
16.6.4.6 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is not used for 2 Rx UE	Same as 6.6.4.3	Same as 6.6.4.3	Same as 6.6.4.3 with following exceptions: - Test requirements for configuration 1,2 also apply to configuration 4
16.6.4.7 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for 1 Rx UE	Same as 6.6.4.3 Same as 16.6.4.5	Same as 16.6.4.5Same as 6.6.4.3	Same as 16.6.4.5Same as 6.6.4.3 with following exceptions: - Test requirements for configuration 1,2 also apply to configuration 4
16.6.4.8 NR SA FR1 CSI-RS based L1-RSRP measurement when DRX is used for 2 Rx UE	Same as 6.6.4.3	Same as 6.6.4.3	Same as 6.6.4.3 with following exceptions: - Test requirements for configuration 1,2 also apply to configuration 4
16.6.5.3 NR SA FR1 - E-UTRA CGI Identification of E-UTRA cell for 1 Rx UE	During T1 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: 18dB Es2/Noc2: -infinity During T2 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -2dB Es2/Noc2: 7dB During T3 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -2dB Es2/Noc2: 7dB	During T1 -0.55dB 0dB 0dB 0dB During T2 -0.55dB 0dB 0dB 0.55dB During T3 -0.55dB 0dB 0dB 0.55dB	During T1 Noc1: -106.55dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: 18dB Es2/Noc2: -infinity During T2 Noc1: -106.55dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -2dB Es2/Noc2: 7.55dB During T3 Noc1: -106.55dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -2dB Es2/Noc2: 7.55dB
16.6.5.4 NR SA FR1 - E-UTRA CGI Identification of E-UTRA cell for 2 Rx UE	During T1 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: 18dB Es2/Noc2: -infinity	During T1 0dB 0dB 0dB 0dB	During T1 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: 18dB Es2/Noc2: -infinity

	During T2 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -2dB Es2/Noc2: 7dB During T3 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -2dB Es2/Noc2: 7dB	During T2 0dB 0dB 0dB 0dB During T3 0dB 0dB 0dB 0dB	During T2 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -2dB Es2/Noc2: 7dB During T3 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -2dB Es2/Noc2: 7dB
16.7.1.1.1 NR SA FR1 SS-	TEST CONFIGURATION 1, 2, 4		
RSRP absolute measurement accuracy for 1 Rx UE	Test 1: Noc: -106dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.0dB Reported RSRP values: ±5.5dB Test 2: Noc: -88dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.0dB Reported RSRP values: ±9dB Test 3: Noc: -114dBm/15kHz + ΔBG_offset Ês1 / Noc: +3.0dB Ês2 / Noc: 0dB Reported RSRP values: ±5.5dB	Test 1: -1.5dB 0dB +0.4dB Via mapping Test 2: 0dB 0dB +0.4dB Via mapping Test 3: 0dB 0dB 0dB Via mapping	Test 1: Noc: -107.5dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.4dB RSRP_43 to RSRP_57 Test 2: Noc: -88dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.4dB RSRP_59 to RSRP_80 Test 3: Noc: -114dBm/15kHz + ΔBG_offset Ês1 / Noc: +3.0dB Ês2 / Noc: -0dB RSRP_35 to RSRP_50 RSRP_36 to RSRP_50 RSRP_36 to RSRP_51 RSRP_37 to RSRP_51 RSRP_37 to RSRP_52 RSRP_38 to RSRP_52 RSRP_38 to RSRP_53 RSRP_39 to RSRP_53 depending on operating band
	TEST CONFIGURATION 3		
	Test 1: N/A Test 2: Noc: -94dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.0dB Reported RSRP values: ±9dB Test 3: Noc: -114dBm/15kHz + ΔBG_offset Ês1 / Noc: +3.0dB Ês2 / Noc: 0dB Reported RSRP values: ±5.5dB	Test 1: N/A Test 2: 0dB 0dB +0.4dB Via mapping Test 3: -1.2dB 0dB 0dB Via mapping	Test 1: N/A Test 2: Noc: -94dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.4dB RSRP_56 to RSRP_77 Test 3: Noc: -115.2dBm/15kHz + ΔBG_offset Ês1 / Noc: +3.0dB Ês2 / Noc: -0dB RSRP_37 to RSRP_51 RSRP_38 to RSRP_52 RSRP_38 to RSRP_52 RSRP_39 to RSRP_53 RSRP_39 to RSRP_53 RSRP_40 to RSRP_54 RSRP_40 to RSRP_54 RSRP_41 to RSRP_55 depending on operating band

16.7.1.1.2 NR SA FR1 SS-RSRP relative measurement accuracy for 1 Rx UE	Test 1: Noc: Test configuration 1, 2, 4: -106dBm/15kHz Test configuration 3: N/A Ês1 / Noc: +6.0dB Ês2 / Noc: +1.0dB Reported rel. SS-RSRP values: ±3dB Test 2: Noc: Test configuration 1, 2, 4: -88dBm/15kHz Test configuration 3 -94dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +1.0dB Reported rel. SS-RSRP values: ±3dB Test 3: Noc: -114dBm/15kHz + ΔBG_offset Ês1 / Noc: +3.0dB Ês2 / Noc: 0dB Reported re. SS-RSRP values: ±3dB	Test 1: 0 dB N/A 0 dB +1.0dB Via mapping Test 2: 0dB 0dB 0dB +1.0dB Via mapping Test 3: 0dB 0dB 0dB Via mapping	Test 1: Noc: -106 dBm/15kHz N/A Ês1 / Noc: +6.0dB Ês2 / Noc: +2.0dB RSRP_x-8 to RSRP_x-1 Test 2: Noc: -88dBm/15kHz -94dBm/15kHz Ês1 / Noc: +6.0dB Ês2 / Noc: +2.0dB RSRP_x-8 to RSRP_x-1 Test 3: Noc: -114dBm/15kHz + ΔBG_offset Ês1 / Noc: +3.0dB Ês2 / Noc: 0dB RSRP_x-7 to RSRP_x+1
16.7.1.2.1 NR SA FR1 SS-RSRP absolute measurement accuracy for 2 Rx UE	Same as 6.7.1.1.1	Same as 6.7.1.1.1	Same as 6.7.1.1.1 with following exceptions: - Test requirements for configuration 1,2 also apply to configuration 4
16.7.1.2.2 NR SA FR1 SS-RSRP relative measurement accuracy for 2 Rx UE	Same as 6.7.1.1.2	Same as 6.7.1.1.2	Same as 6.7.1.1.2 with following exceptions: - Test requirements for configuration 1,2 also apply to configuration 4
16.7.1.3.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for 1 Rx UE	TEST CONFIGURATION 1, 2, 4		
	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz Ês1 / N_{oc1}: +10.0dB Ês2 / N_{oc2}: +10.0dB Reported RSRP values: ±8dB Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc2}: -115dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: +13.0dB Ês2 / N_{oc2}: -3.0dB Reported RSRP values: ±4.5dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz N_{oc2}: -94.65dBm/15kHz Ês1 / N_{oc1}: +10.0dB Ês2 / N_{oc2}: +10.0dB RSRP_61 to RSRP_82 Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc2}: -115dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: +13.0dB Ês2 / N_{oc2}: -3.0dB RSRP_31 to RSRP_46 RSRP_32 to RSRP_46 RSRP_32 to RSRP_47 RSRP_33 to RSRP_47 RSRP_33 to RSRP_48 RSRP_34 to RSRP_49 RSRP_35 to RSRP_49 depending on operating band
	TEST CONFIGURATION 3		

	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz Ês1 / N_{oc1}: +10.0dB Ês2 / N_{oc2}: +10.0dB Reported RSRP values: ±8dB Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -115dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: +13.0dB Ês2 / N_{oc2}: -3.0dB Reported RSRP values: ±4.5dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz Ês1 / N_{oc1}: +10.0dB Ês2 / N_{oc2}: +10.0dB RSRP_64 to RSRP_85 Test 2: N_{oc}: -107dBm/15kHz + Δ_{BG_offset} N_{oc1}: -115dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: +13.0dB Ês2 / N_{oc2}: -3.0dB RSRP_34 to RSRP_49 RSRP_35 to RSRP_49 RSRP_36 to RSRP_50 RSRP_36 to RSRP_50 RSRP_36 to RSRP_51 RSRP_37 to RSRP_52 RSRP_38 to RSRP_52 depending on operating band
16.7.1.3.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy for 1 Rx UE	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz Ês1 / N_{oc1}: +10.0dB Ês2 / N_{oc2}: +10.0dB Reported RSRP values: ±8dB Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc2}: -115dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: +13.0dB Ês2 / N_{oc2}: -3.0dB Reported RSRP values: ±4.5dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz N_{oc2}: -94.65dBm/15kHz Ês1 / N_{oc1}: +10.0dB Ês2 / N_{oc2}: +10.0dB RSRP_x-8 to RSRP_x+8 Test 2: N_{oc1}: -107dBm/15kHz + Δ_{BG_offset} N_{oc2}: -115dBm/15kHz + Δ_{BG_offset} Ês1 / N_{oc1}: +13.0dB Ês2 / N_{oc2}: -3.0dB RSRP_x-34 to RSRP_x-15
16.7.1.4.1 NR SA FR1-FR1 SS-RSRP absolute measurement accuracy for 2 Rx UE	Same as 6.7.1.2.1	Same as 6.7.1.2.1	Same as 6.7.1.2.1 with following exceptions: - Test requirements for configuration 1,2 also apply to configuration 4
16.7.1.4.2 NR SA FR1-FR1 SS-RSRP relative measurement accuracy for 2 Rx UE	Same as 6.7.1.2.2	Same as 6.7.1.2.2	Same as 6.7.1.2.2 with following exceptions: - Test requirements for configuration 1,2 also apply to configuration 4
16.7.2.1 NR SA FR1 SS-RSRQ absolute measurement accuracy for 1 Rx UE	TEST CONFIGURATION 1, 2, 4		
	Test 1: Noc: -85dBm/15kHz Ês1 / Noc: +3.0dB Ês2 / Noc: +3.0dB Reported RSRQ values: ±3.5dB Test 2: Noc: -101dBm/15kHz Ês1 / Noc: -2.9dB Ês2 / Noc: -2.9dB Reported RSRQ values: ±4.5dB Test 3: Noc: -114dBm/15kHz + ΔBG_offset Ês1 / Noc: -4.0dB	Test 1: -1.5dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB	Test 1: Noc: -86.5dBm/15kHz Ês1 / Noc: +3.0dB Ês2 / Noc: +3.0dB RSRQ_50 to RSRQ_64 Test 2: Noc: -101dBm/15kHz Ês1 / Noc: -2.9dB Ês2 / Noc: -2.9dB RSRQ_44 to RSRQ_62 Test 3: Noc: -114dBm/15kHz + ΔBG_offset

	Ês2 / Noc: -4.0dB Reported RSRQ values: ±4.5dB	0dB Via mapping	Ês1 / Noc: -4.0dB Ês2 / Noc: -4.0dB RSRQ_42 to RSRQ_61
	TEST CONFIGURATION 3		
	Test 1: Noc: -91dBm/15kHz Ês1 / Noc: +3.0dB Ês2 / Noc: +3.0dB Reported RSRQ values: ±2.5dB Test 2: N/A Test 3: Noc: -114dBm/15kHz + ΔBG_offset Ês1 / Noc: -4.0dB Ês2 / Noc: -4.0dB Reported RSRQ values: ±3.5dB	Test 1: -1.6dB 0dB 0dB Via mapping Test 2: N/A Test 3: 0dB 0dB 0dB Via mapping	Test 1: Noc: -86.5dBm/15kHz Ês1 / Noc: +3.0dB Ês2 / Noc: +3.0dB RSRQ_50 to RSRQ_64 Test 2: N/A Test 3: Noc: -114dBm/15kHz + ΔBG_offset Ês1 / Noc: -4.0dB Ês2 / Noc: -4.0dB RSRQ_42 to RSRQ_61
16.7.2.2 NR SA FR1 SS-RSRQ absolute measurement accuracy for 2 Rx UE	Same as 6.7.2.1	Same as 6.7.2.1	Same as 6.7.2.1 with following exceptions: - Test requirements for configuration 1,2 also apply to configuration 4
16.7.2.3.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for 1 Rx UE	Test configuration 1,2,4: Test 1 Noc1: -80.18dBm/15kHz Noc2: -80.18dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB Test 2 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB	 Test 1 -1.5dB -1.5dB 0dB 0dB Via mapping Via mapping Test 2 0dB 0dB 0dB 0dB Via mapping Via mapping Test 3 0dB 0dB 0dB 0dB Via mapping Via mapping	 Test 1 Noc1: -81.68dBm/15kHz Noc2: -81.68dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_50 to RSRQ_64 Extreme condition, RSRQ_47 to RSRQ_67 Test 2 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_50 to RSRQ_64 Extreme condition, RSRQ_47 to RSRQ_67 Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB Normal condition, RSRQ_50 to RSRQ_64 Extreme condition, RSRQ_47 to RSRQ_67
	Test configuration 3: Test 1 Noc1: -86.27dBm/15kHz Noc2: -86.27dBm/15kHz	 Test 1 0dB 0dB	 Test 1 Noc1: -86.27dBm/15kHz Noc2: -86.27dBm/15kHz

	Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB Test 2 Noc1: -113dBm/15kHz Noc2: -113dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB	0dB 0dB Via mapping Via mapping Test 2 0dB 0dB 0dB 0dB Via mapping Via mapping Test 3 0dB 0dB 0dB 0dB Via mapping Via mapping	Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_50 to RSRQ_64 Extreme condition, RSRQ_47 to RSRQ_67 Test 2 Noc1: -113dBm/15kHz Noc2: -113dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_50 to RSRQ_64 Extreme condition, RSRQ_47 to RSRQ_67 Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB Normal condition, RSRQ_50 to RSRQ_64 Extreme condition, RSRQ_47 to RSRQ_67
16.7.2.3.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for 1 Rx UE	Test configuration 1,2,4: Test 1 Noc1: -80.18dBm/15kHz Noc2: -80.18dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±4.25dB Extreme condition, Reported RSRQ values: ±5.25dB Test 2 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±4.25dB Extreme condition, Reported RSRQ values: ±5.25dB Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±4.21dB Extreme condition, Reported RSRQ values: ±5.21dB	 Test 1 -1.5dB -1.5dB 0dB 0dB Via mapping Via mapping Test 2 0dB 0dB 0dB 0dB Via mapping Via mapping Test 3 0dB 0dB 0dB 0dB Via mapping Via mapping	 Test 1 Noc1: -81.68dBm/15kHz Noc2: -81.68dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_x-9 to RSRQ_x+9 Extreme condition, RSRQ_x-11 to RSRQ_x+11 Test 2 Noc1: -106dBm/15kHz Noc2: -106dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_x-9 to RSRQ_x+9 Extreme condition, RSRQ_x-11 to RSRQ_x+11 Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB Normal condition, RSRQ_x-13 to RSRQ_x+4 Extreme condition, RSRQ_x-15 to RSRQ_x+6
	Test configuration 3: Test 1	 Test 1	 Test 1

	Noc1: -86.27dBm/15kHz Noc2: -86.27dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB Test 2 Noc1: -113dBm/15kHz Noc2: -113dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB	0dB 0dB 0dB 0dB Via mapping Via mapping Test 2 0dB 0dB 0dB 0dB Via mapping Via mapping Test 3 0dB 0dB 0dB 0dB Via mapping Via mapping	Noc1: -86.27dBm/15kHz Noc2: -86.27dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_x-9 to RSRQ_x+9 Extreme condition, RSRQ_x-11 to RSRQ_x+11 Test 2 Noc1: -113dBm/15kHz Noc2: -113dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_x-9 to RSRQ_x+9 Extreme condition, RSRQ_x-11 to RSRQ_x+11 Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB Normal condition, RSRQ_x-13 to RSRQ_x+4 Extreme condition, RSRQ_x-15 to RSRQ_x+6
16.7.2.4.1 NR SA FR1-FR1 SS-RSRQ absolute measurement accuracy for 2 Rx UE	Test configuration 1,2,4: Same as 6.7.2.2.2 test configuration 1,2	Same as 6.7.2.2.2 test configuration 1,2	Same as 6.7.2.2.2 test configuration 1,2
	Test configuration 3: Test 1 Noc1: -86.27dBm/15kHz Noc2: -86.27dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB Test 2 Noc1: -113dBm/15kHz Noc2: -113dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB	Test 1 0dB 0dB 0dB 0dB Via mapping Via mapping Test 2 0dB 0dB 0dB 0dB Via mapping Via mapping Test 3 0dB 0dB 0dB 0dB Via mapping	Test 1 Noc1: -86.27dBm/15kHz Noc2: -86.27dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_50 to RSRQ_64 Extreme condition, RSRQ_47 to RSRQ_67 Test 2 Noc1: -113dBm/15kHz Noc2: -113dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_50 to RSRQ_64 Extreme condition, RSRQ_47 to RSRQ_67 Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB Normal condition, RSRQ_50 to RSRQ_64

	Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB	Via mapping	Extreme condition, RSRQ_47 to RSRQ_67
16.7.2.4.2 NR SA FR1-FR1 SS-RSRQ relative measurement accuracy for 2 Rx UE	Test configuration 1,2,4: Same as 6.7.2.2.2 test configuration 1, 2	Same as 6.7.2.2.2 test configuration 1, 2	Same as 6.7.2.2.2 test configuration 1, 2
	Test configuration 3: Test 1 Noc1: -86.27dBm/15kHz Noc2: -86.27dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB Test 2 Noc1: -113dBm/15kHz Noc2: -113dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB Normal condition, Reported RSRQ values: ±3.68dB Extreme condition, Reported RSRQ values: ±5.18dB	Test 1 0dB 0dB 0dB 0dB Via mapping Via mapping Test 2 0dB 0dB 0dB 0dB Via mapping Via mapping Test 3 0dB 0dB 0dB 0dB Via mapping Via mapping	Test 1 Noc1: -86.27dBm/15kHz Noc2: -86.27dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_x-7 to RSRQ_x+7 Extreme condition, RSRQ_x-9 to RSRQ_x+9 Test 2 Noc1: -113dBm/15kHz Noc2: -113dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, RSRQ_x-7 to RSRQ_x+7 Extreme condition, RSRQ_x-9 to RSRQ_x+9 Test 3 Noc1: -116dBm/15kHz + ΔBG_offset Noc2: -116dBm/15kHz + ΔBG_offset Es1/Noc1: 3dB Es2/Noc2: -1.75dB Normal condition, RSRQ_x-11 to RSRQ_x+2 Extreme condition, RSRQ_x-13 to RSRQ_x+4
16.7.3.1 NR SA FR1 SS-SINR absolute measurement accuracy for 1 Rx UE	Test configuration 1, 2, 4: Same as 6.7.3.1 test configuration 1, 2	Same as 6.7.3.1 test configuration 1, 2	Same as 6.7.3.1 test configuration 1, 2
	Test configuration 3: Test 1 Noc: -93dBm/15kHz Es1/Noc: 4.54dB Es2/Noc: 2.66dB Normal condition, Reported SINR values: ±4.40dB Extreme condition, Reported SINR values: ±4.90dB Test 2 Noc: -116dBm/15kHz + ΔBG_offset Es1/Noc: -4dB Es2/Noc: -4dB	0dB 0dB 0dB Via mapping Via mapping 0dB 0.5dB 0.5dB Via mapping	Test 1 Noc: -93dBm/15kHz Es1/Noc: 4.54dB Es2/Noc: 2.66dB Normal condition, SINR_29 to SINR_51 Extreme condition, SINR_28 to SINR_52 Test 2 Noc: -116dBm/15kHz + ΔBG_offset Es1/Noc: -3.5dB

	Normal condition, Reported SINR values: ±4.17dB Extreme condition, Reported SINR values: ±4.67dB	Via mapping	Es2/Noc: -3.5dB Normal condition, SINR_26 to SINR_47 Extreme condition, SINR_25 to SINR_48
16.7.3.2 NR SA FR1 SS-SINR absolute measurement accuracy for 2 Rx UE	Same as 16.7.3.1	Same as 16.7.3.1	Same as 16.7.3.1
16.7.3.3.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy for 1 Rx UE	Test 1 Noc1: -88dBm/15kHz Noc2: -88dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported SINR values: ±4.30dB Extreme condition, Reported SINR values: ±5.30dB Test 2 Noc1: -108.5dBm/15kHz Noc2: -108.5dBm/15kHz Es1/Noc1: 20dB Es2/Noc2: 20dB Normal condition, Reported SINR values: ±4.30dB Extreme condition, Reported SINR values: ±5.30dB Test 3 Noc1: -119.5dBm/15kHz + ΔBG_offset Noc2: -119.5dBm/15kHz + ΔBG_offset Es1/Noc1: -4dB Es2/Noc2: -4dB Normal condition, Reported SINR values: ±4.80dB Extreme condition, Reported SINR values: ±5.30dB	 0dB 0dB 0dB 0dB Via mapping Via mapping 0dB 0dB 0dB 0dB Via mapping Via mapping 0dB 0dB 0.35dB 0.35dB Via mapping Via mapping	Test 1 Noc1: -88dBm/15kHz Noc2: -88dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, SINR_34 to SINR_52 Extreme condition, SINR_32 to SINR_54 Test 2 Noc1: -108.5dBm/15kHz Noc2: -108.5dBm/15kHz Es1/Noc1: 20dB Es2/Noc2: 20dB Normal condition, SINR_78 to SINR_95 Extreme condition, SINR_76 to SINR_97 Test 3 Noc1: -119.5dBm/15kHz + ΔBG_offset Noc2: -119.5dBm/15kHz + ΔBG_offset Es1/Noc1: -3.65dB Es2/Noc2: -3.65dB Normal condition, SINR_30 to SINR_49 Extreme condition, SINR_29 to SINR_50
16.7.3.3.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy for 1 Rx UE	Test 1 Noc1: -88dBm/15kHz Noc2: -88dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, Reported SINR values: ±4.92dB Extreme condition, Reported SINR values: ±5.42dB Test 2 Noc1: -108.5dBm/15kHz Noc2: -108.5dBm/15kHz Es1/Noc1: 20dB Es2/Noc2: 20dB Normal condition, Reported SINR values: ±4.92dB Extreme condition, Reported SINR values: ±5.42dB Test 3 Noc1: -119.5dBm/15kHz + ΔBG_offset	 0dB 0dB 0dB 0dB Via mapping Via mapping 0dB 0dB 0dB 0dB Via mapping Via mapping 0dB 0dB	Test 1 Noc1: -88dBm/15kHz Noc2: -88dBm/15kHz Es1/Noc1: -1.75dB Es2/Noc2: -1.75dB Normal condition, SINR_x-10 to SINR_x+10 Extreme condition, SINR_x-11 to SINR_x+11 Test 2 Noc1: -108.5dBm/15kHz Noc2: -108.5dBm/15kHz Es1/Noc1: 20dB Es2/Noc2: 20dB Normal condition, SINR_x-10 to SINR_x+10 Extreme condition, SINR_x-11 to SINR_x+11 Test 3 Noc1: -119.5dBm/15kHz + ΔBG_offset Noc2: -119.5dBm/15kHz + ΔBG_offset

	Noc2: -119.5dBm/15kHz + ΔBG_offset Es1/Noc1: -4dB Es2/Noc2: -4dB Normal condition, Reported SINR values: ±5.42dB Extreme condition, Reported SINR values: ±5.42dB	0.35dB 0.35dB Via mapping Via mapping	Es1/Noc1: -3.65dB Es2/Noc2: -3.65dB Normal condition, SINR_x-11 to SINR_x+11 Extreme condition, SINR_x-11 to SINR_x+11
16.7.3.4.1 NR SA FR1-FR1 SS-SINR absolute measurement accuracy for 2 Rx UE	Same as 6.7.3.2.1	Same as 6.7.3.2.1	Same as 6.7.3.2.1
16.7.3.4.2 NR SA FR1-FR1 SS-SINR relative measurement accuracy for 2 Rx UE	Same as 6.7.3.2.2	Same as 6.7.3.2.2	Same as 6.7.3.2.2
16.7.4.1.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for 1 Rx UE	Test configuration 1, 2, 4: Test 1 Noc: -94.65dBm/15kHz Es/Noc: 10dB Normal condition, Reported L1-RSRP values: ±13.03dB Extreme condition, Reported L1-RSRP values: ±16.03dB Test 2 Noc: -117dBm/15kHz + ΔBG_offset Es/Noc: -3dB Normal condition, Reported L1-RSRP values: ±13.03dB Extreme condition, Reported L1-RSRP values: ±16.03dB	 0dB 0dB Via mapping Via mapping 0dB 0.35dB Via mapping Via mapping	 Test 1 Noc: -94.65dBm/15kHz Es/Noc: 10dB Normal condition, RSRP_59 to RSRP_85 Extreme condition, RSRP_56 to RSRP_88 Test 2 Noc: -117dBm/15kHz + ΔBG_offset Es/Noc: -2.65dB Normal condition: RSRP_27 to RSRP_46 RSRP_28 to RSRP_47 RSRP_28 to RSRP_47 RSRP_29 to RSRP_48 RSRP_29 to RSRP_48 RSRP_30 to RSRP_49 RSRP_30 to RSRP_49 RSRP_31 to RSRP_50 Depending on band groups Extreme condition: RSRP_23 to RSRP_51 RSRP_23 to RSRP_51 RSRP_24 to RSRP_52 RSRP_24 to RSRP_52 RSRP_25 to RSRP_53 RSRP_25 to RSRP_53 RSRP_26 to RSRP_54 RSRP_26 to RSRP_54 Depending on band groups
	Test configuration 3: Test 1 Noc: -94.65dBm/15kHz Es/Noc: 10dB Normal condition, Reported L1-RSRP values: ±13.03dB Extreme condition, Reported L1-RSRP values: ±16.03dB Test 2 Noc: -117dBm/15kHz + ΔBG_offset Es/Noc: -3dB Normal condition, Reported L1-RSRP values: ±13.03dB	 0dB 0dB Via mapping Via mapping 0dB 0.35dB Via mapping	 Test 1 Noc: -94.65dBm/15kHz Es/Noc: 10dB Normal condition, RSRP_62 to RSRP_88 Extreme condition, RSRP_59 to RSRP_91 Test 2 Noc: -117dBm/15kHz + ΔBG_offset Es/Noc: -2.65dB Normal condition: RSRP_30 to RSRP_49

			RSRP_31 to RSRP_50 RSRP_31 to RSRP_50 RSRP_32 to RSRP_51 RSRP_32 to RSRP_51 RSRP_33 to RSRP_52 RSRP_33 to RSRP_52 RSRP_34 to RSRP_53 Depending on band groups
	Extreme condition, Reported L1-RSRP values: ±16.03dB	Via mapping	Extreme condition: RSRP_26 to RSRP_54 RSRP_26 to RSRP_54 RSRP_27 to RSRP_55 RSRP_27 to RSRP_55 RSRP_28 to RSRP_56 RSRP_28 to RSRP_56 RSRP_29 to RSRP_57 RSRP_29 to RSRP_57 Depending on band groups
16.7.4.1.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy for 1 Rx UE	Test configuration 1, 2, 4: Test 1 Noc: -94.65dBm/15kHz Es/Noc: 10dB Normal condition, Reported differential L1-RSRP values: ±6.6dB Extreme condition, Reported differential L1-RSRP values: ±7.6dB Test 2 Noc: -117dBm/15kHz + ΔBG_offset Es/Noc: -3dB Normal condition, Reported differential L1-RSRP values: ±6.6dB Extreme condition, Reported differential L1-RSRP values: ±7.6dB	 0dB 0dB Via mapping Via mapping 0dB 0.35dB Via mapping Via mapping	 Test 1 Noc: -94.65dBm/15kHz Es/Noc: 10dB Normal condition, DIFFRSRP_0 to DIFFRSRP_3 Extreme condition, DIFFRSRP_0 to DIFFRSRP_3 Test 2 Noc: -117dBm/15kHz + ΔBG_offset Es/Noc: -2.65dB Normal condition, DIFFRSRP_0 to DIFFRSRP_3 Extreme condition, DIFFRSRP_0 to DIFFRSRP_3
	Test configuration 3: Test 1 Noc: -94.65dBm/15kHz Es/Noc: 10dB Normal condition, Reported differential L1-RSRP values: ±6.6dB Extreme condition, Reported differential L1-RSRP values: ±7.6dB Test 2 Noc: -117dBm/15kHz + ΔBG_offset Es/Noc: -3dB Normal condition, Reported differential L1-RSRP values: ±6.6dB Extreme condition, Reported differential L1-RSRP values: ±7.6dB	 0dB 0dB Via mapping Via mapping 0dB 0.35dB Via mapping Via mapping	 Test 1 Noc: -94.65dBm/15kHz Es/Noc: 10dB Normal condition, DIFFRSRP_0 to DIFFRSRP_3 Extreme condition, DIFFRSRP_0 to DIFFRSRP_3 Test 2 Noc: -117dBm/15kHz + ΔBG_offset Es/Noc: -2.65dB Normal condition, DIFFRSRP_0 to DIFFRSRP_3 Extreme condition, DIFFRSRP_0 to DIFFRSRP_3
16.7.4.2.1 NR SA FR1 SSB based L1-RSRP absolute measurement accuracy for 2 Rx UE	Test configuration 1, 2, 4: Same as 6.7.4.1.1	Same as 6.7.4.1.1	Same as 6.7.4.1.1

	Test configuration 3: N_{oc1}: -94.65 dBm/15kHz $\hat{E}s_1$ / N_{oc1}: 10dB Reported L1-RSRP values: ±8.5dB (±3dB additionally for extreme conditions) Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1$ / N_{oc1}: -3dB Reported L1-RSRP values: ±5dB (±4.5dB additionally for extreme conditions)	Test 1: 0dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}s_1$ / N_{oc1}: 10dB RSRP_65 to RSRP_85 Test 2: N_{oc1}: -117dBm/15kHz + Δ_{BG_offset} $\hat{E}s_1$ / N_{oc1}: -2.2dB RSRP_34 to RSRP_47 RSRP_34 to RSRP_48 RSRP_35 to RSRP_48 RSRP_35 to RSRP_49 RSRP_36 to RSRP_49 RSRP_37 to RSRP_50 RSRP_37 to RSRP_51 depending on operating band
16.7.4.2.2 NR SA FR1 SSB based L1-RSRP relative measurement accuracy for 2 Rx UE	Same as 6.7.4.1.2	Same as 6.7.4.1.2	Same as 6.7.4.1.2
16.7.4.3.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for 1 Rx UE	Same as 16.7.4.1.1	Same as 16.7.4.1.1	Same as 16.7.4.1.1
16.7.4.3.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for 1 Rx UE	Same as 16.7.4.1.2	Same as 16.7.4.1.2	Same as 16.7.4.1.2
16.7.4.4.1 NR SA FR1 CSI-RS based L1-RSRP absolute measurement accuracy for 2 Rx UE	Same as 16.7.4.2.1	Same as 16.7.4.2.1	Same as 16.7.4.2.1
16.7.4.4.2 NR SA FR1 CSI-RS based L1-RSRP relative measurement accuracy for 2 Rx UE	Same as 6.7.4.1.2	Same as 6.7.4.1.2	Same as 6.7.4.1.2
16.7.5.1 NR SA FR1 - E-UTRA RSRP absolute measurement accuracy for 1 Rx UE	Test 1 Noc2: -91.65dBm/15kHz Es2/Noc2: 10dB Normal condition, Reported LTE RSRP values: ±10.53dB Extreme condition, Reported LTE RSRP values: ±13.53dB Test 2 Noc2: -117dBm/15kHz + ΔBG_offset Es2/Noc2: -4dB Normal condition, Reported LTE RSRP values: ±7.03dB Extreme condition, Reported LTE RSRP values: ±11.53dB	0dB 0dB Via mapping Via mapping 0dB 0.35dB Via mapping Via mapping	Noc2: -91.65dBm/15kHz Es2/Noc2: 10dB Normal condition, RSRP_48 to RSRP_69 Extreme condition, RSRP_45 to RSRP_72 Noc2: -117dBm/15kHz + ΔBG_offset Es2/Noc2: -3.65dB Normal condition, RSRP_13 to RSRP_27 RSRP_13 to RSRP_27 RSRP_14 to RSRP_28 RSRP_14 to RSRP_28 RSRP_15 to RSRP_29 RSRP_16 to RSRP_30 RSRP_16 to RSRP_30 Depending on band groups Extreme condition, RSRP_8 to RSRP_31 RSRP_9 to RSRP_32 RSRP_9 to RSRP_32 RSRP_10 to RSRP_33 RSRP_10 to RSRP_33

			RSRP_11 to RSRP_34 RSRP_12 to RSRP_35 Depending on band groups
16.7.5.2 NR SA FR1 - E-UTRA RSRP absolute measurement accuracy for 2 Rx UE	Same as 6.7.5.1	Same as 6.7.5.1	Same as 6.7.5.1
16.7.6.1 NR SA FR1 - E-UTRA RSRQ absolute measurement accuracy for 1 Rx UE	Test 1 Noc2: -83dBm/15kHz Es2/Noc2: -1.75dB Normal condition, Reported LTE RSRQ values: ±3.68dB Extreme condition, Reported LTE RSRQ values: ±5.18dB Test 2 Noc2: -104.7dBm/15kHz Es2/Noc2: -4dB Normal condition, Reported LTE RSRQ values: ±4.72dB Extreme condition, Reported LTE RSRQ values: ±5.22dB Test 3 Noc2: -119.5dBm/15kHz + ΔBG_offset Es2/Noc2: -4dB Normal condition, Reported LTE RSRQ values: ±4.72dB Extreme condition, Reported LTE RSRQ values: ±5.22dB	 0dB 0dB Via mapping Via mapping 0dB 0.35dB Via mapping Via mapping 0dB 0.35dB Via mapping Via mapping	 Noc2: -83dBm/15kHz Es2/Noc2: -1.75dB Normal condition, RSRQ_3 to RSRQ_17 Extreme condition, RSRP_0 to RSRP_20 Noc2: -104.7dBm/15kHz Es2/Noc2: -3.65dB Normal condition, RSRQ_0 to RSRQ_17 Extreme condition, RSRP_0 to RSRP_18 Noc2: -119.5dBm/15kHz + ΔBG_offset Es2/Noc2: -3.65dB Normal condition, RSRQ_0 to RSRQ_17 Extreme condition, RSRP_0 to RSRP_18
16.7.6.2 NR SA FR1 - E-UTRA RSRQ absolute measurement accuracy for 2 Rx UE	Same as 6.7.6.1	Same as 6.7.6.1	Same as 6.7.6.1

Table F.1.3.2-8: Derivation of test requirements for NR SA FR2 RRM tests for RedCap

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
17.1.1.1 NR SA FR2 Cell reselection for 2 Rx UE	Same as 7.1.1.1	Same as 7.1.1.1	Same as 7.1.1.1
17.1.1.2 NR SA FR2-FR2 Cell reselection for 2 Rx UE	Same as 7.1.1.2	Same as 7.1.1.2	Same as 7.1.1.2
17.1.1.3 NR SA FR2 Cell reselection for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	Same as 7.1.1.3	Same as 7.1.1.3	Same as 7.1.1.3
17.1.1.4 NR SA FR2-FR2 Cell reselection for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE	Same as 7.1.1.5	Same as 7.1.1.5	Same as 7.1.1.5
17.3.1.1 NR SA FR2 handover with unknown target cell for 2 Rx	Same as 7.3.1.2	Same as 7.3.1.2	Same as 7.3.1.2
17.3.1.2 NR SA FR2-FR2 handover with unknown target cell for 2 Rx UE	Same as 7.3.1.3	Same as 7.3.1.3	Same as 7.3.1.3
17.3.2.1.1 NR SA FR2 Intra-frequency RRC	Same as 7.3.2.1.1	Same as 7.3.2.1.1	Same as 7.3.2.1.1

Re-establishment in FR2			
17.3.2.1.2 NR SA FR2-FR2 Inter-frequency RRC Re-establishment in FR2	Same as 7.3.2.1.2	Same as 7.3.2.1.2	Same as 7.3.2.1.2
17.3.2.1.3 NR SA FR2 RRC re-establishment without serving cell timing	Same as 7.3.2.1.3	Same as 7.3.2.1.3	Same as 7.3.2.1.3
17.3.2.3.1 NR SA FR2-FR2 RRC connection release with redirection for 2 Rx UE	Same as 7.3.2.3	Same as 7.3.2.3	Same as 7.3.2.3
17.4.1.1 NR SA FR2 NR UE Transmit Timing accuracy for 2 Rx UE	Same as 7.4.1.1	Same as 7.4.1.1	Same as 7.4.1.1
17.5.1.1 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE	Same as 7.5.1.1	Same as 7.5.1.1	Same as 7.5.1.1
17.5.1.2 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE	Same as 7.5.1.2	Same as 7.5.1.2	Same as 7.5.1.2
17.5.1.3 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	Same as 7.5.1.1	Same as 7.5.1.1	Same as 7.5.1.1
17.5.1.4 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	Same as 7.5.1.4	Same as 7.5.1.4	Same as 7.5.1.4
17.5.1.5 NR SA FR2 Radio Link Monitoring Out-of-sync Test for PCell configured with CSI-RS-based RLM RS in non-DRX mode for 2 Rx UE	Same as 7.5.1.5	Same as 7.5.1.5	Same as 7.5.1.5
17.5.1.6 NR SA FR2 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE	Same as 7.5.1.6	Same as 7.5.1.6	Same as 7.5.1.6
17.5.1.7 NR SA FR2 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE	Same as 7.5.1.7	Same as 7.5.1.7	Same as 7.5.1.7
17.5.1.8 NR SA FR2 Radio Link Monitoring In-sync Test for FR2	Same as 7.5.1.8	Same as 7.5.1.8	Same as 7.5.1.8

PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE			
17.5.1.9 NR SA FR2 radio link monitoring UE scheduling restrictions	Same as 7.5.1.9	Same as 7.5.1.9	Same as 7.5.1.9
17.5.2.1 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE	Same as 7.5.5.1	Same as 7.5.5.1	Same as 7.5.5.1
17.5.2.2 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE	Same as 7.5.5.2	Same as 7.5.5.2	Same as 7.5.5.2
17.5.2.3 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE	Same as 7.5.5.3	Same as 7.5.5.3	Same as 7.5.5.3
17.5.2.4 NR SA FR2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE	Same as 7.5.5.4	Same as 7.5.5.4	Same as 7.5.5.4
17.5.2.5 NR SA FR2 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE	Same as 7.5.5.1	Same as 7.5.5.1	Same as 7.5.5.1
17.5.3.1.1 NR SA FR2 DCI-based and Timer-based DL active BWP switch for 2 Rx UE	T1 to T3 Noc: -112 dBm/15kHz Ês / Noc: 18dB	 0dB 0dB	T1 to T3 Noc: -112 dBm/15kHz Ês / Noc: 18dB
17.5.3.2.1 NR SA FR2 RRC-based DL active BWP switch for 2 Rx UE	Same as 17.5.3.1.1	Same as 17.5.3.1.1	Same as 17.5.3.1.1
17.5.4.1.1 NR SA FR2 MAC-CE based active TCI state switch for a known TCI state for 2 Rx UE	Same as 7.5.8.1.1	Same as 7.5.8.1.1	Same as 7.5.8.1.1
17.5.4.2.1 NR SA FR2 RRC-CE based active TCI state switch for a known TCI state for 2 Rx UE	Same as 7.5.8.2.1	Same as 7.5.8.2.1	Same as 7.5.8.2.1
17.5.5.1.1 NR SA FR2 MAC-CE based spatial relation switch associated with known DL-RS for 2 Rx UE	Same as 7.5.9.1.1	Same as 7.5.9.1.1	Same as 7.5.9.1.1
17.5.5.2.1 NR SA FR2 RRC-based spatial relation switch	Same as 7.5.9.2.1	Same as 7.5.9.2.1	Same as 7.5.9.2.1

associated with a known DL-RS for 2 Rx UE			
17.6.1.1 NR SA FR2 event triggered reporting without gap in non-DRX for 2 Rx UE	Same as 7.6.1.1	Same as 7.6.1.1	Same as 7.6.1.1
17.6.1.2 NR SA FR2 event triggered reporting without gap in DRX for 2 Rx UE	Same as 7.6.1.2	Same as 7.6.1.2	Same as 7.6.1.2
17.6.1.3 NR SA FR2 event triggered reporting with gap in non-DRX for 2 Rx UE	Same as 7.6.1.1	Same as 7.6.1.1	Same as 7.6.1.1
17.6.1.4 NR SA FR2 event triggered reporting with gap in DRX for 2 Rx UE	Same as 7.6.1.2	Same as 7.6.1.2	Same as 7.6.1.2
17.6.2.1 NR SA FR2-FR2 event triggered reporting in non-DRX for 2 Rx UE	Same as 7.6.2.1	Same as 7.6.2.1	Same as 7.6.2.1
17.6.2.2 NR SA FR2-FR2 event triggered reporting in DRX for 2 Rx UE	Same as 7.6.2.2	Same as 7.6.2.2	Same as 7.6.2.2
17.6.2.3 NR SA FR2-FR2 event triggered reporting with SSB time index detection in non-DRX for 2 Rx UE	Same as 7.6.2.1	Same as 7.6.2.1	Same as 7.6.2.1
17.6.2.4 NR SA FR2-FR2 event triggered reporting with SSB time index detection in DRX for 2 Rx UE	Same as 7.6.2.2	Same as 7.6.2.2	Same as 7.6.2.2
17.6.3.1 NR SA FR2 SSB based L1-R SRP measurement in non-DRX for 2 Rx UE	Same as 7.6.3.1	Same as 7.6.3.1	Same as 7.6.3.1
17.6.3.2 NR SA FR2 SSB based L1-RSRP measurement in DRX for 2 Rx UE	Same as 7.6.3.1	Same as 7.6.3.1	Same as 7.6.3.1
17.6.3.3 NR SA FR2 CSI-RS based L1-RSRP measurement in non-DRX for 2 Rx UE	Same as 7.6.3.3	Same as 7.6.3.3	Same as 7.6.3.3
17.6.3.4 R SA FR2 CSI-RS based L1-RSRP measurement in DRX for 2 Rx UE	Same as 7.6.3.3	Same as 7.6.3.3	Same as 7.6.3.3
17.7.1.1 NR SA FR2 SS-RSRP measurement accuracy for 2 Rx UE	Same as 7.7.1.1	Same as 7.7.1.1	Same as 7.7.1.1
17.7.1.2 NR SA FR2-FR2 SS-RSRP measurement accuracy for 2 Rx UE	Same as 7.7.1.2	Same as 7.7.1.2	Same as 7.7.1.2
17.7.2.1 NR SA FR2 SS-RSRQ measurement accuracy for 2 Rx UE	Same as 7.7.2.1	Same as 7.7.2.1	Same as 7.7.2.1
17.7.2.2 NR SA FR2-FR2 SS-RSRQ measurement accuracy for 2 Rx UE	Same as 7.7.2.2	Same as 7.7.2.2	Same as 7.7.2.2
17.7.3.1 NR SA FR2 SSB based L1-RSRP	Same as 7.7.4.1	Same as 7.7.4.1	Same as 7.7.4.1

measurement accuracy for 2 Rx UE			
17.7.3.2 NR SA FR2 CSI-RS based L1-RSRP measurement accuracy for 2 Rx UE	Same as 7.7.4.2	Same as 7.7.4.2	Same as 7.7.4.2
17.7.4.1 NR SA FR2 SS-SINR measurement accuracy for 2 Rx UE	Same as 7.7.3.1	Same as 7.7.3.1	Same as 7.7.3.1
17.7.4.2 NR SA FR2-FR2 SS-SINR measurement accuracy for 2 Rx UE	Same as 7.7.3.2	Same as 7.7.3.2	Same as 7.7.3.2

Table F.1.3.2-9: Derivation of test requirements for E-UTRA – NR inter-RAT test cases with E-UTRA serving cell RRM tests for RedCap

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
18.1.1.1 E-UTRA - NR SA FR1 E-UTRA Cell reselection to higher priority NR target Cell in FR1	Same as 8.2.1.1	Same as 8.2.1.1	Same as 8.2.1.1
18.2.1.1 E-UTRA - NR SA FR1 handover for 2 Rx UE	Same as 8.3.1.1	Same as 8.3.1.1	Same as 8.3.1.1
18.2.2.1 E-UTRA - NR SA FR1 RRC connection release with redirection for 2 Rx UE	Same as 6.3.2.3.1	Same as 6.3.2.3.1	Same as 6.3.2.3.1
18.3.1.1 E-UTRA - NR SA FR1 event triggered reporting without SSB time index detection in non-DRX	Same as 8.4.2.1	Same as 8.4.2.1	Same as 8.4.2.1
18.3.1.2 E-UTRA - NR SA FR1 event triggered reporting without SSB time index detection in DRX	Same as 8.4.2.1	Same as 8.4.2.1	Same as 8.4.2.1
18.3.1.3 E-UTRA - NR SA FR1 event triggered reporting with SSB time index detection in non-DRX	Same as 8.4.2.1	Same as 8.4.2.1	Same as 8.4.2.1
18.3.1.4 E-UTRA - NR SA FR1 event triggered reporting with SSB time index detection in DRX	Same as 8.4.2.1	Same as 8.4.2.1	Same as 8.4.2.1
18.3.1.5 E-UTRA - NR SA FR2 event triggered reporting without SSB time index detection in non-DRX	Same as 8.4.2.5	Same as 8.4.2.5	Same as 8.4.2.5
18.3.1.6 E-UTRA - NR SA FR2 event triggered reporting without SSB time index detection in DRX	Same as 8.4.2.6	Same as 8.4.2.6	Same as 8.4.2.6
18.3.1.7 E-UTRA - NR SA FR2 event triggered reporting with SSB time index detection in non-DRX	Same as 8.4.2.6	Same as 8.4.2.6	Same as 8.4.2.6
18.3.1.8 E-UTRA - NR SA FR2 event triggered	Same as 8.4.2.6	Same as 8.4.2.6	Same as 8.4.2.6

reporting with SSB time index detection in DRX			

Table F.1.3.2-10: Derivation of test requirements for EN-DC FR1 RRM tests for shared spectrum

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
10.1.1.1.1 EN-DC FR1 4-step RA type contention-based random access for NR PSCell with CCA	Absolute uplink power: Normal conditions ±17dB Relative uplink power step: Normal conditions ±2.5dB Uplink timing: 15kHz SCS T_e ±12*64*T_c 30kHz SCS T_e ±8*64*T_c	 2.1dB 0.7dB 112T_c 112T_c	Absolute uplink power: Normal conditions ±19.1dB Relative uplink power step: Normal conditions ±3.2dB Uplink timing: 15kHz SCS T_e ±880*T_c 30kHz SCS T_e ±624*T_c
10.1.1.1.2 EN-DC FR1 4-step RA type non-contention based random access for NR PSCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1	Same as 10.1.1.1.1
10.1.1.1.3 EN-DC FR1 2-step RA type contention-based random access for NR PSCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1	Same as 10.1.1.1.1
10.1.1.1.4 EN-DC FR1 2-step RA type non-contention based random access for NR PSCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1	Same as 10.1.1.1.1
10.1.2 EN-DC FR1 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA	During T1: Noc1: -98dBm/15kHz Ês1 / Noc: +8.00dB Ês2 / Noc: +8.00dB Noc2: -98dBm/15kHz Ês3 / Noc: -infinity Ês4 / Noc: -infinity During T2 and T3: Noc1: -98dBm/15kHz Ês1 / Noc: +8.00dB Ês2 / Noc: +8.00dB Noc2: -98dBm/15kHz Ês3 / Noc: +11.00dB Ês4 / Noc: +11.00dB In signaling: E-UTRAN_A3-offset = 0dB NR_A3-offset = 0dB	During T1: 0dB 0dB 0dB 0dB 0dB 0dB During T2 and T3: 0dB 0dB 0dB 0dB -1.00dB -1.00dB In signaling: -1.00dB -1.00dB	During T1: Noc1: -98dBm/15kHz Ês1 / Noc: +8.00dB Ês2 / Noc: +8.00dB Noc2: -98dBm/15kHz Ês3 / Noc: -infinity Ês4 / Noc: -infinity During T2 and T3: Noc1: -98dBm/15kHz Ês1 / Noc: +8.00dB Ês2 / Noc: +8.00dB Noc2: -98dBm/15kHz Ês3 / Noc: +10.00dB Ês4 / Noc: +10.00dB In signaling: E-UTRAN_A3-offset = -1dB NR_A3-offset = -1dB
10.2.1.1 EN-DC FR1 UE Transmit Timing Test with PSCell under DL CCA	Same as 4.4.1.1	Same as 4.4.1.1	Same as 4.4.1.1
10.2.2.1 EN-DC FR1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA	Same as 4.4.1.1	Same as 4.4.1.1	Same as 4.4.1.1
10.3.1.2 EN-DC FR1 Radio link monitoring out-of-sync test for PSCell under CCA configured with SSB-based RLM RS in non-DRX mode	SNR during T1: 1dB T2: -7dB T3: -15dB	Offset during T1: +0.8dB T2: +0.8dB T3: -0.8dB	SNR during T1: 1.8dB T2: -6.2dB T3: -15.8dB

10.3.1.3 EN-DC FR1 Radio link monitoring in-sync test for PSCell under CCAconfigured with SSB-based RLM RS in non-DRX mode	SNR during T1: 1dB T2: -7dB T3: -15dB T4: -4.5dB T5: 1dB	Offset during T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: +0.8dB	SNR during T1: 1.8dB T2: -6.2dB T3: -15.8dB T4: -5.3dB T5: 1.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause D.4A.2.1
10.3.3.1 EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle	During T1 to T3: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB	During T1 to T3: 0dB 0dB 0dB 0dB	During T1 to T3: Noc_2: -104dBm/15kHz Noc_3: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB $\hat{E}s_3$ / Noc_3: +17dB
10.3.3.2 EN-DC FR1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle	Same as 10.3.3.1	Same as 10.3.3.1	Same as 10.3.3.1
10.3.3.3 EN-DC FR1 SCell Activation and Deactivation of unknown NR SCell with NR PSCell and NR SCell under CCA	Same as 10.3.3.1	Same as 10.3.3.1	Same as 10.3.3.1
10.3.4.1 EN-DC FR1 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell under CCA configured with SSB-based BFD and LR in non-DRX mode	q0 SSB SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB q1 SSB during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1 SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10dB q1 SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10dB	Offset during: T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: -0.8dB q1 SSB during T1: 0dB -0.2dB q1 SSB during T2: 0dB -0.2dB q1 SSB during T3, T4 and T5: 0dB +0.2dB	SNR during: T1: +5.8dB T2: -2.2dB T3: -12.8dB T4: -12.8dB T5: -12.8dB For testing of a UE which supports 4RX on all bands, the SNR during T3, T4 and T5 is modified as specified in clause D.4A.2.1 q1 SSB during T1: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1 SSB during T2: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -10.2dB q1 SSB during T3, T4 and T5: Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +10.2dB
10.3.4.2 EN-DC FR1 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell under CCA configured with SSB-based BFD and LR in DRX mode	Same as 10.3.4.1	Same as 10.3.4.1	Same as 10.3.4.1
10.3.5.1 EN-DC FR1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_2: -104dBm/15kHz	During T1: 0dB 0dB During T2: 0dB	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_2: -104dBm/15kHz

	$\hat{E}s_2$ / Noc_2: +17dB	0dB	$\hat{E}s_2$ / Noc_2: +17dB
10.3.5.2.1 EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch in non-DRX in synchronous EN-DC	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB During T3: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB	During T1: 0dB 0dB During T2: 0dB 0dB During T3: 0dB 0dB	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB During T2: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB During T3: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB
10.3.5.2.2 EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC	Same as 10.3.5.2.1	Same as 10.3.5.2.1	Same as 10.3.5.2.1
10.3.5.3.1 EN-DC FR1 E-UTRAN – NR PSCell under CCA FR1 DL active BWP switch in non-DRX in synchronous EN-DC	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB	During T1: 0dB 0dB	During T1: Noc_2: -104dBm/15kHz $\hat{E}s_2$ / Noc_2: +17dB
10.3.6.1 EN-DC FR1 Addition and Release Delay of known NR PSCell on the carrier under CCA	Noc: -85dBm/15kHz $\hat{E}s$ / Noc: 0.0dB B1-Threshold: -93 dBm/SCS	-3.6dB 0dB -3dB	Noc: -88.6dBm/15kHz $\hat{E}s$ / Noc: 0.0dB B1-Threshold: -96 dBm/SCS
10.4.1.1 EN-DC FR1 Event-triggered reporting tests on PSCC under CCA without gaps under non-DRX	During T1: Noc: -98dBm/15kHz $\hat{E}s2$ / Noc: +4.00dB $\hat{E}s3$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $\hat{E}s2$ / Noc: +4.00dB $\hat{E}s3$ / Noc: +7.00dB	During T1: 0dB 0dB 0dB During T2: 0dB 1.2dB 0dB	During T1: Noc: -98dBm/15kHz $\hat{E}s2$ / Noc: +4.00dB $\hat{E}s3$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $\hat{E}s2$ / Noc: +5.20dB $\hat{E}s3$ / Noc: +7.00dB
10.4.1.4 EN-DC FR1 Event-triggered reporting tests on PSCC under CCA with per-UE gaps under DRX	Same as 10.4.1.1	Same as 10.4.1.1	Same as 10.4.1.1
10.4.2.3 EN-DC FR1 event triggered reporting tests for FR1 with CCA cell without SSB time index detection when DRX is not used	During T1: Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz $\hat{E}s2$ / Noc: +4.00dB $\hat{E}s3$ / Noc: -infinity During T2: Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz $\hat{E}s2$ / Noc: +4.00dB $\hat{E}s3$ / Noc: +7.00dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz $\hat{E}s2$ / Noc: +4.00dB $\hat{E}s3$ / Noc: -infinity During T2: Freq 2 Noc: -98dBm/15kHz Freq 3 Noc: -98dBm/15kHz $\hat{E}s2$ / Noc: +4.00dB $\hat{E}s3$ / Noc: +7.00dB
10.4.2.4 EN-DC FR1 event triggered reporting tests for FR1 cell with CCA without SSB time index detection when DRX is used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
10.4.2.5 EN-DC FR1 event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is not used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
10.4.2.6 EN-DC FR1 event triggered reporting	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3

tests for FR1 cell with CCA with SSB time index detection when DRX is used			
10.4.2.7 EN-DC FR1 event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
10.4.2.8 EN-DC FR1 event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
10.4.2.9 EN-DC FR1 event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
10.4.2.10 EN-DC FR1 event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
10.4.3.1 EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is not used	During T1: Noc: -94.65dBm/15kHz Ês0 / Noc: +0.00dB Ês1 / Noc: -infinity During T2: Noc: -94.65dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: +3.00dB Reported SSB#0 SS-RSRP values ± 10dB Reported SSB#1 SS-RSRP values ± 10dB Reported Differential SS-RSRP values ± 3dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0.5dB Via mapping	During T1: Noc: -94.65dBm/15kHz Ês0 / Noc: +0.00dB Ês1 / Noc: -infinity During T2: Noc: -94.65dBm/15kHz Ês0 / Noc: 0.00dB Ês1 / Noc: +3.50dB SSB#1: RSRP_58 to RSRP_78 SSB#0: DIFFRSRP_0 to DIFFRSRP_3
10.4.3.2 EN-DC FR1 SSB based L1-RSRP measurement on PSCC under CCA when DRX is used	Same as 10.4.3.1	Same as 10.4.3.1	Same as 10.4.3.1
10.4.3.3 EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used	Same as 10.4.3.1	Same as 10.4.3.1	Same as 10.4.3.1
10.4.3.4 EN-DC FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used	Same as 10.4.3.1	Same as 10.4.3.1	Same as 10.4.3.1
10.4.4.1 EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	Same as 12.4.2.1	Same as 12.4.2.1	Same as 12.4.2.1
10.4.4.2 EN-DC FR1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used	Same as 12.4.2.1	Same as 12.4.2.1	Same as 12.4.2.1
10.4.4.3 EN-DC FR1 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index	Same as 12.4.2.1	Same as 12.4.2.1	Same as 12.4.2.1

detection when DRX is not used			
10.4.4.4 EN-DC FR1 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used	Same as 12.4.2.1	Same as 12.4.2.1	Same as 12.4.2.1
10.5.1.1 EN-DC FR1 Intra-frequency measurement accuracy on a CCA serving cell	**TEST CONFIGURATION 1, 2**		
	Test 1: N_{oc}: -91dBm/30kHz $\hat{E}s_2 / N_{oc}$: +6.0dB $\hat{E}s_3 / N_{oc}$: +1.0dB Reported RSRP values: ±8dB Test 2: N_{oc}: -107dBm/30kHz $\hat{E}s_2 / N_{oc}$: +1.0dB $\hat{E}s_3 / N_{oc}$: 0dB Reported RSRP values: ±6dB	Test 1: 0dB 0dB +0.4dB Via mapping Test 2: -1.0dB 0dB +0.2dB Via mapping	Test 1: N_{oc}: -91dBm/30kHz $\hat{E}s_2 / N_{oc}$: +6.0dB $\hat{E}s_3 / N_{oc}$: +1.4dB RSRP_57 to RSRP_76 Test 2: N_{oc}: -118dBm/30kHz $\hat{E}s_2 / N_{oc}$: +1.0dB $\hat{E}s_3 / N_{oc}$: +0.2dB RSRP_43 to RSRP_55 RSRP_43 to RSRP_55 depending on operating band
The derivation of the RSRP values takes into account the uncertainty in Cell 3 SS-RSRP from N_{oc} and $\hat{E}s_3 / N_{oc}$, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRP values given above are for normal conditions. In all cases the RSRP values are 4.5dB wider at each end for extreme conditions.			
10.5.1.2 EN-DC FR1 Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell	**TEST CONFIGURATION 1, 2**		
	Test 1: N_{oc1}: -94.65 dBm/15kHz N_{oc2}: -94.65 dBm/15kHz $\hat{E}s1 / N_{oc1}$: +10.0dB $\hat{E}s2 / N_{oc2}$: +10.0dB Reported RSRP values: ±8dB Test 2: N_{oc1}: -103dBm/15kHz N_{oc2}: -111dBm/15kHz $\hat{E}s1 / N_{oc1}$: +13.0dB $\hat{E}s2 / N_{oc2}$: -3.0dB Reported RSRP values: ±4.5dB	Test 1: -1.35dB -1.35dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -96dBm/15kHz N_{oc2}: -96dBm/15kHz $\hat{E}s1 / N_{oc1}$: +10.0dB $\hat{E}s2 / N_{oc2}$: +10.0dB RSRP_64 to RSRP_83 Test 2: N_{oc}: -103dBm/15kHz N_{oc1}: -111dBm/15kHz $\hat{E}s1 / N_{oc1}$: +13.0dB $\hat{E}s2 / N_{oc2}$: -3.0dB RSRP_47 to RSRP_60 RSRP_40 to RSRP_52 depending on operating band
The derivation of the RSRP values takes into account the uncertainty in Cell 2 SS-RSRP from N_{oc2} and $\hat{E}s2 / N_{oc2}$, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRP values given above are for normal conditions. For extreme conditions, the RSRP values are 3.0 dB wider at each end for Test 1, and 4.5 dB wider at each for Test 2.			
10.5.2.1 EN-DC FR1 Intra-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell	**TEST CONFIGURATION 1, 2**		
	Test 1: N_{oc}: -91dBm/15kHz $\hat{E}s1 / N_{oc}$: +3.0dB $\hat{E}s2 / N_{oc}$: +3.0dB Reported RSRQ values: ±2.5dB	Test 1: -1.6dB 0dB 0dB Via mapping	Test 1: N_{oc}: -92.6dBm/15kHz $\hat{E}s1 / N_{oc}$: +3.0dB $\hat{E}s2 / N_{oc}$: +3.0dB RSRQ_52 to RSRQ_62

	Test 2: N/A Test 3: N_{oc}: -110dBm/15kHz $\hat{E}s1 / N_{oc}$: -4.0dB $\hat{E}s2 / N_{oc}$: -4.0dB Reported RSRQ values: ±3.5dB	Test 2: N/A Test 3: 0dB 0dB 0dB Via mapping	Test 2: N/A Test 3: N_{oc}: -110dBm/15kHz $\hat{E}s1 / N_{oc}$: -4.0dB $\hat{E}s2 / N_{oc}$: -4.0dB RSRQ_44 to RSRQ_59
The derivation of the RSRQ values takes into account the uncertainty in Cell 2 SS-RSRQ from N_{oc} and $\hat{E}s2 / N_{oc}$, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRQ values given above are for normal conditions. For extreme conditions, the SS-RSRQ values are 1.5dB wider at each end for Test 1, and 0.5 dB wider at each for Tests 2 and 3.			
10.5.2.2 EN-DC FR1 Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell	**TEST CONFIGURATION 1, 2**		
	Test 1: N_{oc1}: -86.27 dBm/15kHz N_{oc2}: -86.27 dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±2.5dB Test 2: N_{oc1}: -113dBm/15kHz N_{oc2}: -113dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±2.5dB Test 3: NR_CCA_FR1_I: N_{oc1}: -112dBm/15kHz N_{oc2}: -112dBm/15kHz $\hat{E}s1 / N_{oc1}$: 3dB $\hat{E}s2 / N_{oc2}$: -1.75dB NR_CCA_FR1_J: N_{oc1}: -111.5dBm/15kHz N_{oc2}: -111.5dBm/15kHz $\hat{E}s1 / N_{oc1}$: 3dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported RSRQ values: ±2.5dB	Test 1: -1.53dB -1.53dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: NR_CCA_FR1_I: 0dB 0dB 0dB 0dB NR_CCA_FR1_J: 0dB 0dB 0dB 0dB Via mapping	Test 1: N_{oc1}: -87.8dBm/15kHz N_{oc2}: -87.8dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_52 to RSRQ_62 Test 2: N_{oc1}: -113dBm/15kHz N_{oc2}: -113dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_52 to RSRQ_62 Test 3: NR_CCA_FR1_I: N_{oc1}: -112dBm/15kHz N_{oc2}: -112dBm/15kHz $\hat{E}s1 / N_{oc1}$: 3dB $\hat{E}s2 / N_{oc2}$: -1.75dB NR_CCA_FR1_J: N_{oc1}: -111.5dBm/15kHz N_{oc2}: -111.5dBm/15kHz $\hat{E}s1 / N_{oc1}$: 3dB $\hat{E}s2 / N_{oc2}$: -1.75dB RSRQ_52 to RSRQ_62 RSRQ_52 to RSRQ_62 depending on operating band
The derivation of the RSRQ values takes into account the uncertainty in Cell 2 SS-RSRQ from N_{oc2} and $\hat{E}s2 / N_{oc2}$, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRQ values given above are for normal conditions. For extreme conditions, the RSRQ values are 1.5dB wider at each end.			
10.5.3.1 EN-DC FR1 Intra-frequency measurement accuracy on PSCC under CCA	**TEST CONFIGURATION 1, 2**		
	Test 1: N_{oc}: -93dBm/15kHz $\hat{E}s1 / N_{oc}$: +4.54dB $\hat{E}s2 / N_{oc}$: +2.66dB Reported SINR values: ±3.5dB Test 2: N_{oc}: -112dBm/15kHz $\hat{E}s1 / N_{oc}$: -4dB	Test 1: -0.2dB 0dB 0dB Via mapping Test 2: 0dB 0.5dB	Test 1: N_{oc}: -93.2dBm/15kHz $\hat{E}s1 / N_{oc}$: +4.54dB $\hat{E}s2 / N_{oc}$: +2.66dB SINR_31 to SINR_49 Test 2: N_{oc}: -112dBm/15kHz $\hat{E}s1 / N_{oc}$: -3.5dB

	$\hat{E}s2 / N_{oc}$: -4dB Reported SINR values: ±3.5dB	0.5dB Via mapping	$\hat{E}s2 / N_{oc}$: -3.5dB SINR_28 to SINR_45
The derivation of the SINR values takes into account the uncertainty in Cell 2 SS- SINR from N_{oc} and $\hat{E}s2 / N_{oc}$, the allowed UE reporting accuracy, and the UE mapping function. The SS- SINR values given above are for normal conditions. For extreme conditions, the SS- SINR values are 0.5dB wider at each end.			
10.5.3.2 EN-DC FR1 Inter-frequency measurement accuracy on PSCC under CCA	**TEST CONFIGURATION 1, 2**		
	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB Reported SINR values: ±3dB Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s1 / N_{oc1}$: 20dB $\hat{E}s2 / N_{oc2}$: 20dB Reported SINR values: ±3dB Test 3: N_{oc1}: -115.5dBm/15kHz N_{oc2}: -115.5dBm/15kHz $\hat{E}s1 / N_{oc1}$: -4dB $\hat{E}s2 / N_{oc2}$: -4dB Reported SINR values: ±3.5dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Test 3: 0dB 0dB 0.8dB 0.8dB Via mapping	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s1 / N_{oc1}$: -1.75dB $\hat{E}s2 / N_{oc2}$: -1.75dB SINR_35 to SINR_51 Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s1 / N_{oc1}$: 20dB $\hat{E}s2 / N_{oc2}$: 20dB SINR_79 to SINR_94 Test 3: N_{oc1}: -115.5dBm/15kHz N_{oc2}: -115.5dBm/15kHz $\hat{E}s1 / N_{oc1}$: -3.2dB $\hat{E}s2 / N_{oc2}$: -3.2dB SINR_32 to SINR_49
The derivation of the SINR values takes into account the uncertainty in Cell 2 SS- SINR from N_{oc} and $\hat{E}s2 / N_{oc}$, the allowed UE reporting accuracy, and the UE mapping function. The SS- SINR values given above are for normal conditions. For extreme conditions, the SS- SINR values are 1dB wider at each for Tests 1 and 2 and 0.5dB wider at each end for Test 3.			
10.5.3.3 EN-DC FR1 Intra-frequency measurement accuracy on SCC under CCA	Same as 10.5.3.1	Same as 10.5.3.1	Same as 10.5.3.1
10.5.4.1 EN-DC FR1 SSB based L1-RSRP measurement accuracy with CCA			
Test Configuration 1,2	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}s_1 / N_{oc1}$: 10dB Reported L1-RSRP values: ±8.5dB (±3dB additionally for extreme conditions) Test 2: N_{oc1}: -113dBm/15kHz $\hat{E}s_1 / N_{oc1}$: -3dB Reported L1-RSRP values: ±5dB (±4.5dB additionally for extreme conditions)	Test 1: -1.35dB 0dB Via mapping Test 2: 0dB 0.8dB Via mapping	Test 1: N_{oc1}: -96dBm/15kHz $\hat{E}s_1 / N_{oc1}$: 10dB RSRP_63 to RSRP_84 Test 2: N_{oc1}: -113dBm/15kHz $\hat{E}s_1 / N_{oc1}$: -2.2dB RSRP_38 to RSRP_51
10.5.5.1 EN-DC FR1 RSSI measurement accuracy on PSCC with CCA	Slots where RSSI is measured: Noc: -87.00dBm/SCS $\hat{E}s$ / Noc: -infinity Slots where RSSI is not measured: Noc: -106.00dBm/SCS $\hat{E}s$ / Noc: +2.50dB Normal conditions:	Slots where RSSI is measured: 0dB 0dB Slots where RSSI is not measured: 0dB 0dB Via mapping	Slots where RSSI is measured: Noc: -87.00dBm/SCS $\hat{E}s$ / Noc: -infinity Slots where RSSI is not measured: Noc: -106.00dBm/SCS $\hat{E}s$ / Noc: +2.50dB

	Reported RSSI values: ±5.5dB Extreme conditions: Reported RSSI values: ±8.5dB		RSSI_35 to RSSI_49 RSSI_32 to RSSI_52
10.5.5.2 EN-DC FR1 RSSI measurement accuracy on SCC with CCA	Same as 10.5.5.1	Same as 10.5.5.1	Same as 10.5.5.1
10.5.5.3 EN-DC FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA	Slots where RSSI is measured: Noc1: -106.00dBm/SCS Ês1 / Noc1: +2.50dB Noc2: -87.00dBm/SCS Ês2 / Noc2: -infinity Slots where RSSI is not measured: Noc1: -106.00dBm/SCS Ês1 / Noc1: +2.50dB Noc2: -106.00dBm/SCS Ês2 / Noc2: +2.50dB Normal conditions: Reported RSSI values: ±5.5dB Extreme conditions: Reported RSSI values: ±8.5dB	Slots where RSSI is measured: 0dB 0dB 0dB 0dB Slots where RSSI is not measured: 0dB 0dB 0dB 0dB Via mapping	Slots where RSSI is measured: Noc1: -106.00dBm/SCS Ês1 / Noc1: +2.50dB Noc2: -87.00dBm/SCS Ês2 / Noc2: -infinity Slots where RSSI is not measured: Noc1: -106.00dBm/SCS Ês1 / Noc1: +2.50dB Noc2: -106.00dBm/SCS Ês2 / Noc2: +2.50dB RSSI_35 to RSSI_49 RSSI_32 to RSSI_52
10.5.6.1 EN-DC FR1 Channel occupancy measurement accuracy on PSCC with CCA	Slots where RSSI is measured: Noc: -87.00dBm/SCS Ês / Noc: -infinity Slots where RSSI is not measured: Noc: -106.00dBm/SCS Ês / Noc: +2.50dB channelOccupancyThreshold = -83dBm	Slots where RSSI is measured: 0dB 0dB Slots where RSSI is not measured: 0dB 0dB 0dB	Slots where RSSI is measured: Noc: -87.00dBm/SCS Ês / Noc: - infinity Slots where RSSI is not measured: Noc: -106.00dBm/SCS Ês / Noc: +2.50dB channelOccupancyThreshold = -83dBm
10.5.6.2 EN-DC FR1 Channel occupancy measurement accuracy on SCC with CCA	Same as 10.5.6.1	Same as 10.5.6.1	Same as 10.5.6.1
10.5.6.3 EN-DC FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA	Slots where RSSI is measured: Noc1: -106.00dBm/SCS Ês1 / Noc1: +2.50dB Noc2: -87.00dBm/SCS Ês2 / Noc2: -infinity Slots where RSSI is not measured: Noc1: -106.00dBm/SCS Ês1 / Noc1: +2.50dB Noc2: -106.00dBm/SCS Ês2 / Noc2: +2.50dB channelOccupancyThreshold = -83dBm	Slots where RSSI is measured: 0dB 0dB 0dB 0dB Slots where RSSI is not measured: 0dB 0dB 0dB 0dB 0dB	Slots where RSSI is measured: Noc1: -106.00dBm/SCS Ês1 / Noc1: +2.50dB Noc2: -87.00dBm/SCS Ês2 / Noc2: -infinity Slots where RSSI is not measured: Noc1: -106.00dBm/SCS Ês1 / Noc1: +2.50dB Noc2: -106.00dBm/SCS Ês2 / Noc2: +2.50dB channelOccupancyThreshold = -83dBm

Table F.1.3.2-11: Derivation of test requirements for SA FR1 RRM tests for shared spectrum

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
11.1.1.1 NR SA FR1 Cell reselection to FR1 intra-frequency NR cells when	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +16dB	During T1: 0dB 0dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +16dB

subject to CCA on the serving and target cell	Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +16dB Ês2 / Noc: +13dB	0dB During T2: 0dB 0dB 0.45dB During T3: 0dB 0.45dB 0dB	Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +13dB Ês2 / Noc: +16.45dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: +16.45dB Ês2 / Noc: +13dB
11.1.1.2 NR SA FR1 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -4dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: +12dB	During T1: 0dB -2dB 1.6dB 0.4dB During T2: 0dB 0dB 1.6dB 0dB During T3: 0dB 0dB 1.6dB 1.6dB	During T1: Noc1: -98dBm/15kHz Noc2: -100dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: -3.6dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: 13.6dB
11.1.2.1 Cell re-selection to NR with source NR carrier frequency under CCA	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -4dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: +12dB	During T1: 0dB -2dB 1.6dB 0.4dB During T2: 0dB 0dB 1.6dB 0dB During T3: 0dB 0dB 1.6dB 1.6dB	During T1: Noc1: -98dBm/15kHz Noc2: -100dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: -3.6dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: 13.6dB
11.1.3.1 NR SA FR1 Cell re-selection to NR with source NR carrier frequency under CCA	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -4dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: +12dB	During T1: 0dB -2dB 1.6dB 0.4dB During T2: 0dB 0dB 1.6dB 0dB During T3: 0dB 0dB 1.6dB 1.6dB	During T1: Noc1: -98dBm/15kHz Noc2: -100dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: -3.6dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: 13.6dB
11.1.4.1 NR SA FR1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity	During T1: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity

	During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: +12dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -4dB	During T2: 0dB 0dB 1.6dB 1.6dB During T3: 0dB -2dB 1.6dB 0.4dB	During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: 13.6dB During T3: Noc1: -98dBm/15kHz Noc2: -100dBm/15kHz Ês1 / Noc1: +15.6dB Ês2 / Noc2: -3.6dB
11.1.4.2 NR SA FR1 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -4dB Ês2 / Noc2: +14dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +12dB Ês2 / Noc2: +14dB	During T1: -2dB 0dB 0.4dB 1.6dB During T2: 0dB 0dB 1.6dB 0dB	During T1: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -3.6dB Ês2 / Noc2: +15.6dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +13.6dB Ês2 / Noc2: +14dB
11.2.1.1 NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell	During T1: Noc: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +11dB During T3: Noc: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +11dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB -1dB During T3: 0dB 0dB -1dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +10dB During T3: Noc: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +10dB
11.2.1.2 NR SA FR1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell	During T1: Noc: -98dBm/15kHz Ês1 / Noc: 8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +8dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: 8dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +8dB Ês2 / Noc: +8dB
11.2.1.3 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +5dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +5dB
11.2.1.4 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +11dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB -1dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 8dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +10dB

	During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +11dB	During T3: 0dB 0dB 0dB -1dB	During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +8dB Ês2 / Noc2: +10dB
11.2.1.5 NR SA FR1 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +5dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +5dB
11.2.1.6 NR SA FR1 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +5dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +5dB
11.2.1.7 NR SA FR1 carrier under CCA - E-UTRAN handover with known target cell	During T1: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +12dB Ês2 / Noc2: -infinity During T2: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +8dB During T3: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +8dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 1.55dB During T3: 0dB 0dB 0dB 1.55dB	During T1: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +12dB Ês2 / Noc2: -infinity During T2: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +9.55dB During T3: Noc1: -100dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +9.55dB
11.2.1.8 NR SA FR1 carrier under CCA - E-UTRAN handover with unknown target cell	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +7dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: 0dB Ês2 / Noc2: +7dB
11.2.2.1.1 NR SA FR1 Intra-frequency RRC Re-establishment with CCA in FR1	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +7dB Ês2 / Noc: +4dB During T2: Noc: -98dBm/15kHz Ês1 / Noc: -infinity Ês2 / Noc: +4dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: -infinity	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB During T3: 0dB 0dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +7dB Ês2 / Noc: +4dB During T2: Noc: -98dBm/15kHz Ês1 / Noc: -infinity Ês2 / Noc: +4dB During T3: Noc: -98dBm/15kHz Ês1 / Noc: -infinity

	Ês2 / Noc: +4dB	0dB	Ês2 / Noc: +4dB
11.2.2.1.2 NR SA FR1 Inter-frequency RRC Re-establishment with CCA in FR1	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: +4dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: +4dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: +4dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: +4dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: +4dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: +4dB
11.2.2.1.3 NR SA FR1 Intra-frequency RRC Re-establishment with CCA without serving cell timing	During T1: Noc: -98dBm/15kHz $Ês_1$ / Noc: +4dB $Ês_2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $Ês_1$ / Noc: -infinity $Ês_2$ / Noc: -infinity During T3: Noc: -98dBm/15kHz $Ês_1$ / Noc: -infinity $Ês_2$ / Noc: +4dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB During T3: 0dB 0dB 0dB	During T1: Noc: -98dBm/15kHz $Ês_1$ / Noc: +4dB $Ês_2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $Ês_1$ / Noc: -infinity $Ês_2$ / Noc: -infinity During T3: Noc: -98dBm/15kHz $Ês_1$ / Noc: -infinity $Ês_2$ / Noc: +4dB
11.2.2.1.4 NR SA FR1 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: +7dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -infinity Ês2 / Noc2: +7dB
11.2.2.2.1 NR SA FR1 4-step RA type contention-based random access for NR PCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1	Same as 10.1.1.1.1
11.2.2.2.2 NR SA FR1 4-step RA type non-contention based random access for NR PSCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1	Same as 10.1.1.1.1
11.2.2.2.3 NR SA FR1 2-step RA type contention-based random access for NR PCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1	Same as 10.1.1.1.1
11.2.2.2.4 NR SA FR1 2-step RA type non-contention-based random access for NR PCell with CCA	Same as 10.1.1.1.1	Same as 10.1.1.1.1	Same as 10.1.1.1.1

11.2.2.3.1 NR SA FR1 Redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA	Same as 11.2.2.3.2	Same as 11.2.2.3.2	Same as 11.2.2.3.2
11.2.2.3.2 NR SA FR1 Redirection from NR FR1 carrier without CCA to NR FR1 carrier under CCA	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +4 dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4dB Ês2 / Noc2: +4 dB
11.3.1.1 NR SA FR1 UE Transmit Timing Test with PCell under DL CCA	Same as 6.4.1.1	Same as 6.4.1.1	Same as 6.4.1.1
11.3.2.1 NR SA FR1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA	Same as 6.4.3.1	Same as 6.4.3.1	Same as 6.4.3.1
11.4.1.2 NR SA FR1 Radio link monitoring out-of-sync test for PCell under CCA configured with SSB-based RLM RS in non-DRX mode	Same as 10.3.1.2	Same as 10.3.1.2	Same as 10.3.1.2
11.4.1.3 NR SA FR1 Radio link monitoring in-sync test for PCell under CCA configured with SSB-based RLM RS in non-DRX mode	Same as 10.3.1.3	Same as 10.3.1.3	Same as 10.3.1.3
11.4.3.1 NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle	Same as 10.3.3.1	Same as 10.3.3.1	Same as 10.3.3.1
11.4.3.2 NR SA FR1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 640 ms SCell measurement cycle	Same as 10.3.3.1	Same as 10.3.3.1	Same as 10.3.3.1
11.4.3.3 NR SA FR1 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA	Same as 10.3.3.1	Same as 10.3.3.1	Same as 10.3.3.1
11.4.4.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell under CCA configured with SSB-based BFD and LR in non-DRX mode	Same as 10.3.4.1	Same as 10.3.4.1	Same as 10.3.4.1
11.4.4.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for FR1 PCell under CCA configured with SSB-based BFD and LR in DRX mode	Same as 10.3.4.1	Same as 10.3.4.1	Same as 10.3.4.1

11.4.5.1 NR SA FR1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA	Same as 10.3.5.1	Same as 10.3.5.1	Same as 10.3.5.1
11.4.5.2.1 NR SA FR1 - NR FR1 DL active BWP switch of PCell under CCA with non-DRX	Same as 10.3.5.2.1	Same as 10.3.5.2.1	Same as 10.3.5.2.1
11.4.5.2.2 NR SA FR1 DCI-based DL active BWP switch with non-DRX under CCA	Same as 10.3.5.2.1	Same as 10.3.5.2.1	Same as 10.3.5.2.1
11.4.5.3.1 NR SA FR1 DL active BWP switch of Cell with non-DRX	Same as 10.3.5.3.1	Same as 10.3.5.3.1	Same as 10.3.5.3.1
11.5.1.1 SA FR1 Event-triggered reporting tests on PCC without gaps under non-DRX	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
11.5.1.2 SA FR1 Event-triggered reporting tests on PCC without gaps under DRX	Same as 6.6.1.1	Same as 6.6.1.1	Same as 6.6.1.1
11.5.2.3 NR SA FR1-FR1 Event triggered reporting tests with CCA without SSB time index detection when DRX is not used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.4 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.5 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.6 NR SA FR1-FR1 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.7 NR SA FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.8 NR SA FR1 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.9 NR SA FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3
11.5.2.10 NR SA FR1 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used	Same as 10.4.2.3	Same as 10.4.2.3	Same as 10.4.2.3

11.5.3.1 NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX	During T1: Noc1: -106dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc1: +18dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -2dB Ês2 / Noc2: +17 dB	During T1: 0dB 0dB +1.55dB 0dB During T2: 0dB 0dB 0dB +1.55dB	During T1: Noc1: -106dBm/15kHz Noc2: -104dBm/15kHz Ês1 / Noc1: +19.55dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: -2dB Ês2 / Noc2: +18.55 dB
11.5.3.2 NR SA FR1 - E-UTRAN event-triggered reporting in DRX	Same as 11.5.3.1	Same as 11.5.3.1	Same as 11.5.3.1
11.5.4.1 NR SA FR1 SSB based L1-RSRP measurement when DRX is not used	Same as 10.4.3.1	Same as 10.4.3.1	Same as 10.4.3.1
11.5.4.2 NR SA FR1 SSB based L1-RSRP measurement when DRX is used	Same as 10.4.3.1	Same as 10.4.3.1	Same as 10.4.3.1
11.5.4.3 NR SA FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used	Same as 10.4.3.1	Same as 10.4.3.1	Same as 10.4.3.1
11.5.4.4 NR SA FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used	Same as 10.4.3.1	Same as 10.4.3.1	Same as 10.4.3.1
11.6.1.1 NR SA FR1 intra-frequency SS-RSRP measurement accuracy on a carrier frequency with CCA	Same as 10.5.1.1	Same as 10.5.1.1	Same as 10.5.1.1
11.6.1.2 NR SA FR1 Intra-frequency measurement accuracy on SCC on a carrier frequency with CCA	Test 2: N_{oc}: -94.00dBm/30kHz $\hat{E}s_1$ / N_{oc}: +6.0dB $\hat{E}s_2$ / N_{oc}: +1.0dB Reported RSRP values: ±8dB Test 3: NR_CCA_FR1_I: N_{oc}: -110.00dBm/30kHz $\hat{E}s_1$ / N_{oc}: +1.0dB $\hat{E}s_2$ / N_{oc}: +0.0dB NR_CCA_FR1_J: N_{oc}: -109.50dBm/30kHz $\hat{E}s_1$ / N_{oc}: +1.0dB $\hat{E}s_2$ / N_{oc}: +0.0dB Normal conditions: Reported RSRP values: ±4.5dB	Test 2: 0dB 0dB +0.4dB Via mapping Test 2: NR_CCA_FR1_I: -1.0dB 0dB +0.2dB NR_CCA_FR1_J: -1.5dB 0dB +0.2dB Via mapping	Test 1: N_{oc}: -91dBm/30kHz $\hat{E}s_1$ / N_{oc}: +6.0dB $\hat{E}s_2$ / N_{oc}: +1.4dB RSRP_57 to RSRP_76 Test 2: NR_CCA_FR1_I: N_{oc}: -111dBm/30kHz $\hat{E}s_1$ / N_{oc}: +1.0dB $\hat{E}s_2$ / N_{oc}: +0.2dB NR_CCA_FR1_J: N_{oc}: -111dBm/30kHz $\hat{E}s_1$ / N_{oc}: +1.0dB $\hat{E}s_2$ / N_{oc}: +0.2dB NR_CCA_FR1_I: RSRP_43 to RSRP_55 NR_CCA_FR1_J: RSRP_43 to RSRP_55
The derivation of the RSRP values takes into account the uncertainty in Cell 2 SS-RSRP from N_{oc} and $\hat{E}s_2$ / N_{oc}, the allowed UE reporting accuracy, and the UE mapping function. The SS-RSRP values given above are for normal conditions. In all cases the RSRP values are 4.5dB wider at each end for extreme conditions.			
11.6.2.1 NR SA FR1 intra-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA	Same as 10.5.2.1	Same as 10.5.2.1	Same as 10.5.2.1

11.6.2.2 NR SA FR1 inter-frequency SS-RSRQ measurement accuracy on a carrier frequency with CCA	Same as 10.5.2.2	Same as 10.5.2.2	Same as 10.5.2.2
11.6.2.3 NR SA FR1 Intra-frequency measurement accuracy on SCC	Same as 10.5.2.1	Same as 10.5.2.1	Same as 10.5.2.1
11.6.2.4 NR SA FR1 Inter-frequency measurement accuracy	FFS	FFS	FFS
11.6.3.1 NR SA FR1 Intra-frequency SS-SINR measurement accuracy on a carrier frequency with CCA	Same as 10.5.3.1	Same as 10.5.3.1	Same as 10.5.3.1
11.6.3.2 NR SA FR1 Inter-frequency SS-SINR measurement accuracy on a carrier frequency with CCA	Same as 10.5.3.2	Same as 10.5.3.2	Same as 10.5.3.2
11.6.3.3 NR SA FR1 Intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA	Same as 10.5.3.1	Same as 10.5.3.1	Same as 10.5.3.1
11.6.3.4 NR SA FR1 Intra-frequency SS-SINR measurement accuracy on SCC on a carrier frequency with CCA	FFS	FFS	FFS
11.6.4.1 NR SA FR1 SSB based L1-RSRP measurement accuracy with CCA	Same as 10.5.4.1	Same as 10.5.4.1	Same as 10.5.4.1
11.6.5.1 NR SA FR1 Intra-frequency RSSI measurement accuracy on PCC with CCA	Same as 10.5.5.1	Same as 10.5.5.1	Same as 10.5.5.1
11.6.5.2 NR SA FR1 Intra-frequency RSSI measurement accuracy on SCC with CCA	Same as 10.5.5.1	Same as 10.5.5.1	Same as 10.5.5.1
11.6.5.3 NR SA FR1 Inter-frequency RSSI measurement accuracy on a carrier with CCA	Same as 10.5.5.3	Same as 10.5.5.3	Same as 10.5.5.3
11.6.6.1 NR SA FR1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA	Same as 10.5.6.1	Same as 10.5.6.1	Same as 10.5.6.1
11.6.6.2 NR SA FR1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA	Same as 10.5.6.1	Same as 10.5.6.1	Same as 10.5.6.1
11.6.6.3 NR SA FR1 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA	Same as 10.5.6.3	Same as 10.5.6.3	Same as 10.5.6.3

Table F.1.3.2-12: Derivation of test requirements for E-UTRAN – SA FR1 Shared Spectrum test cases

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
12.1.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -4dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: +12dB	During T1: 0dB -1.90dB 0dB 0.35dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 1.55dB 1.55dB	During T1: Noc1: -98dBm/15kHz Noc2: -99.90dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -3.65dB During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +14dB Ês2 / Noc2: -infinity During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +15.55dB Ês2 / Noc2: +13.55dB
12.2.1.1 E-UTRAN - NR with CCA handover with known target cell	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: 0dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: 0dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB -2.55dB 0.55dB During T3: 0dB 0dB -2.55dB 0.55dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +7dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4.45dB Ês2 / Noc2: +0.55dB During T3: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +4.45dB Ês2 / Noc2: +0.55dB
12.4.2.1 E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is not used under CCA	During T1: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: -infinity During T2: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: +7dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Noc1: -104dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc1: +17dB Ês2 / Noc2: +7dB
12.4.2.2 E-UTRAN-NR FR1 inter-RAT event triggered reporting without SSB time index detection when DRX is used under CCA	Same as 12.4.2.1	Same as 12.4.2.1	Same as 12.4.2.1
12.4.2.3 E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is not used under CCA	Same as 12.4.2.1	Same as 12.4.2.1	Same as 12.4.2.1
12.4.2.4 E-UTRAN-NR FR1 inter-RAT event triggered reporting with SSB time index detection when DRX is used under CCA	Same as 12.4.2.1	Same as 12.4.2.1	Same as 12.4.2.1

Table F.1.3.2-13: Derivation of test requirements for SA FR1 with SCell in Shared Spectrum test cases

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
13.2.2.1 NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle	Same as 10.3.3.1	Same as 10.3.3.1	Same as 10.3.3.1
13.2.2.2 NR SA FR1 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle	Same as 10.3.3.1	Same as 10.3.3.1	Same as 10.3.3.1
13.2.2.3 NR SA FR1 SCell Activation and Deactivation of unknown SCell under CCA	Same as 10.3.3.1	Same as 10.3.3.1	Same as 10.3.3.1
13.3.1.1 NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under non-DRX	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB Ês3 / Noc: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB Ês3 / Noc: +7dB	During T1: 0dB 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB	During T1: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB Ês3 / Noc: -infinity During T2: Noc1: -98dBm/15kHz Noc2: -98dBm/15kHz Ês1 / Noc: +4dB Ês2 / Noc: +4dB Ês3 / Noc: +7dB
13.3.1.2 NR SA FR1 Event-triggered reporting tests on SCC under CCA without gaps under DRX	Same as 13.3.1.1	Same as 13.3.1.1	Same as 13.3.1.1
13.3.1.3 NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under non-DRX	Same as 13.3.1.1	Same as 13.3.1.1	Same as 13.3.1.1
13.3.1.4 NR SA FR1 Event-triggered reporting tests on SCC under CCA with per-UE gaps under DRX	Same as 13.3.1.1	Same as 13.3.1.1	Same as 13.3.1.1
13.3.2.3 NR SA FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is not used	During T1: Noc1: -98dBm/15kHz Noc3: -98dBm/15kHz Ês1 / Noc1: +4dB Ês3 / Noc3: -infinity During T2: Noc1: -98dBm/15kHz Noc3: -98dBm/15kHz Ês1 / Noc1: +4dB Ês3 / Noc3: +7dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	D During T1: Noc1: -98dBm/15kHz Noc3: -98dBm/15kHz Ês1 / Noc1: +4dB Ês3 / Noc2: -infinity During T2: Noc1: -98dBm/15kHz Noc3: -98dBm/15kHz Ês1 / Noc1: +4dB Ês3 / Noc3: +7dB
13.3.2.4 NR SA FR1 Event triggered reporting tests on a carrier with CCA without SSB time index detection when DRX is used	Same as 13.3.2.3	Same as 13.3.2.3	Same as 13.3.2.3
13.3.2.5 NR SA FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is not used	Same as 13.3.2.3	Same as 13.3.2.3	Same as 13.3.2.3

13.3.2.6 NR SA FR1 Event triggered reporting tests on a carrier with CCA with SSB time index detection when DRX is used	Same as 13.3.2.3	Same as 13.3.2.3	Same as 13.3.2.3
13.3.3.1 NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is not used	Same as 10.4.3.1	Same as 10.4.3.1	Same as 10.4.3.1
13.3.3.2 NR SA FR1 SSB based L1-RSRP measurement for SCell under CCA when DRX is used	Same as 10.4.3.1	Same as 10.4.3.1	Same as 10.4.3.1
13.4.1.1 NR SA FR1 SS-RSRP measurement accuracy on a carrier with CCA	Same as 10.5.1.1	Same as 10.5.1.1	Same as 10.5.1.1
13.4.2.1 NR SA FR1 SS-RSRQ measurement accuracy on a carrier with CCA	Same as 10.5.2.1	Same as 10.5.2.1	Same as 10.5.2.1
13.4.3.1 NR SA FR1 SS-SINR measurement accuracy on a carrier with CCA	Same as 10.5.3.1	Same as 10.5.3.1	Same as 10.5.3.1
13.4.4.1 NR SA FR1 L1-RSRP measurement accuracy for beam reporting on a carrier with CCA	Same as 10.5.4.1	Same as 10.5.4.1	Same as 10.5.4.1
13.4.5.1 NR SA FR1 RSSI measurement accuracy on a carrier with CCA	Same as 10.5.5.1	Same as 10.5.5.1	Same as 10.5.5.1
13.4.5.2 NR SA FR1-FR1 RSSI measurement accuracy on a carrier with CCA	Same as 10.5.5.3	Same as 10.5.5.3	Same as 10.5.5.3
13.4.6.1 NR SA FR1 channel occupancy measurement accuracy on a carrier with CCA	Same as 10.5.6.1	Same as 10.5.6.1	Same as 10.5.6.1
13.4.6.2 NR SA FR1-FR1 channel occupancy measurement accuracy on a carrier with CCA	Same as 10.5.6.3	Same as 10.5.6.3	Same as 10.5.6.3

Table F.1.3.2-14: Derivation of test requirements for SA FR1 Satellite Access test cases

Test	Minimum requirement in TS 38.133 [6]	Test tolerance (TT)	Test requirement in TS 38.533
14.1.9 NR SA FR1-FR1 Cell reselection for UE fulfilling low mobility relaxed measurement criterion for Satellite Access	During T1: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +14dB Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -4dB During T2: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +14dB Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +12dB In signalling:	During T1: 0dB 0dB 0dB 0.3dB During T2: 0dB 0dB 0dB -2.25dB In signalling:	During T1: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +14dB Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -3.7dB During T2: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +14dB Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +9.75dB In signalling:

	Thresh_X_HighP of Cell 1 = 48dB Thresh_X_HighP of Cell 2 = 48dB Thresh_X_LowP of Cell 1 = 50dB Thresh_X_LowP of Cell 2 = 50dB Thresh_Serving_LowP of Cell 1 = 44dB Thresh_Serving_LowP of Cell 2 = 44dB SSearchDeltaP of Cell 1 = 3dB SSearchDeltaP of Cell 2 = 3dB	0dB -4dB -2dB 0dB 0dB 2dB 0dB 12dB	Thresh_X_HighP of Cell 1 = 48dB Thresh_X_HighP of Cell 2 = 44dB Thresh_X_LowP of Cell 1 = 48dB Thresh_X_LowP of Cell 2 = 50dB Thresh_Serving_LowP of Cell 1 = 44dB Thresh_Serving_LowP of Cell 2 = 46dB SSearchDeltaP of Cell 1 = 3dB SSearchDeltaP of Cell 2 = 15dB
14.1.10 NR SA FR1-FR1 Cell reselection for UE fulfilling not-at-cell edge relaxed measurement criterion for Satellite Access	During T1: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +14dB Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: -4dB During T2: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +14dB Noc_2: -98dBm/15kHz $\hat{E}s_2$ / Noc_2: +12dB In signalling: SSearchThresholdP of Cell 1 = 50dB SSearchThresholdP of Cell 2 = 50dB	During T1: 0dB 2dB -2dB 0.35dB During T2: 0dB 0dB -2dB 4dB In signalling: 0dB -16dB	During T1: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +16dB Noc_2: -100dBm/15kHz $\hat{E}s_2$ / Noc_2: -3.65dB During T2: Noc_1: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +14dB Noc_2: -100dBm/15kHz $\hat{E}s_2$ / Noc_2: +16dB In signalling: SSearchThresholdP of Cell 1 = 50dB SSearchThresholdP of Cell 2 = 34dB
14.2.1.1 NR SA FR1 Handover for Satellite Access	During T1: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +8.00dB $\hat{E}s_2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +8.00dB $\hat{E}s_2$ / Noc: +11.00dB During T3: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +8.00dB $\hat{E}s_2$ / Noc: +11.00dB Signaled A3-Offset: 0dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB -1dB During T3: 0dB 0dB -1dB -1dB	During T1: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +8.00dB $\hat{E}s_2$ / Noc: -infinity During T2: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +8.00dB $\hat{E}s_2$ / Noc: +10.00dB During T3: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +8.00dB $\hat{E}s_2$ / Noc: +10.00dB Signaled A3-Offset: -1dB
14.2.1.2 NR SA FR1-FR1 Handover for Satellite Access	During T1: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: -infinity During T2: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: +9.00dB During T3: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: +9.00dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB During T3: 0dB 0dB 0dB 0dB	During T1: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: -infinity During T2: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: +9.00dB During T3: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: +9.00dB
14.2.1.3 NR SA FR1 Time-based Conditional Handover for NR Satellite Access	During T1: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +8.00dB $\hat{E}s_2$ / Noc: -infinity	During T1: 0dB 0dB 0dB	During T1: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +8.00dB $\hat{E}s_2$ / Noc: -infinity

	During T2: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +8.00dB $\hat{E}s_2$ / Noc: +11.00dB Signaled A3-Offset: 0dB	During T2: 0dB 0dB -1dB -1dB	During T2: Noc: -98dBm/15kHz $\hat{E}s_1$ / Noc: +8.00dB $\hat{E}s_2$ / Noc: +10.00dB Signaled A3-Offset: -1dB
14.2.1.4 NR SA FR1-FR1 Time-based Conditional Handover for NR Satellite Access	During T1: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: -infinity During T2: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: +9.00dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc: +4.00dB $\hat{E}s_2$ / Noc_2: -infinity During T2: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: +9.00dB
14.2.1.5 NR SA FR1 Distance-based Conditional Handover for Satellite Access	Same as 14.2.1.3	Same as 14.2.1.3	Same as 14.2.1.3
14.2.1.6 NR SA FR1-FR1 Distance-based Conditional Handover for Satellite Access	Same as 14.2.1.4	Same as 14.2.1.4	Same as 14.2.1.4
14.4.1.1 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access	SNR during T1: 1dB T2: -7dB T3: -15dB	Offset during T1: +0.8dB T2: +0.8dB T3: -0.8dB	SNR during T1: 1.8dB T2: -6.2dB T3: -15.8dB
14.4.1.2 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in non-DRX mode for Satellite Access	SNR during T1: 1dB T2: -7dB T3: -15dB T4: -4.5dB T5: 1dB	Offset during T1: +0.8dB T2: +0.8dB T3: -0.8dB T4: -0.8dB T5: +0.8dB	SNR during T1: 1.8dB T2: -6.2dB T3: -15.8dB T4: -5.3dB T5: 1.8dB
14.4.1.3 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access	Same as 14.4.1.1	Same as 14.4.1.1	Same as 14.4.1.1
14.4.1.4 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with SSB-based RLM RS in DRX mode for Satellite Access	Same as 14.4.1.2	Same as 14.4.1.2	Same as 14.4.1.2
14.4.1.5 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access	Same as 14.4.1.1	Same as 14.4.1.1	Same as 14.4.1.1
14.4.1.6 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in non-DRX mode for Satellite Access	Same as 14.4.1.2	Same as 14.4.1.2	Same as 14.4.1.2
14.4.1.7 NR SA FR1 Radio Link Monitoring Out-of-sync for PCell configured with CSI-RS-	Same as 14.4.1.1	Same as 14.4.1.1	Same as 14.4.1.1

based RLM RS in DRX mode for Satellite Access			
14.4.1.8 NR SA FR1 Radio Link Monitoring In-sync for PCell configured with CSI-RS-based RLM RS in DRX mode for Satellite Access	Same as 14.4.1.2	Same as 14.4.1.2	Same as 14.4.1.2
14.4.2.1 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in non-DRX mode for Satellite Access	q0 SSB SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB q1 SSB during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 SSB during T2: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 SSB during T3, T4 and T5: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +10dB	Offset during: T1: +0.4dB T2: +0.4dB T3: -0.4dB T4: -0.4dB T5: -0.4dB q1 SSB during T1: 0dB -0.1dB q1 SSB during T2: 0dB -0.1dB q1 SSB during T3, T4 and T5: 0dB +0.1dB	SNR during: T1: +5.4dB T2: -2.6dB T3: -12.4dB T4: -12.4dB T5: -12.4dB For testing of a UE which supports 4RX on all bands, the SNR for RS in set q0 during T3, T4, and T5 is -15dB-TT = -15.4dB (including test tolerances) q1 SSB during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10.1dB q1 SSB during T2: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10.1dB q1 SSB during T3, T4 and T5: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +10.1dB
14.4.2.2 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with SSB-based BFD and LR in DRX mode for Satellite Access	Same as 14.4.2.1	Same as 14.4.2.1	Same as 14.4.2.1
14.4.2.3 NR SA FR1 Beam Failure Detection and Link Recovery Test for PCell configured with CSI-RS-based BFD and LR in non-DRX mode for Satellite Access	q0 CSI-RS SNR during: T1: 5dB T2: -3dB T3: -12dB T4: -12dB T5: -12dB q1 CSI-RS during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 CSI-RS during T2: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10dB q1 CSI-RS during T3, T4 and T5: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +10dB	Offset during: T1: +0.4dB T2: +0.4dB T3: -0.4dB T4: -0.4dB T5: -0.4dB q1 CSI-RS during T1: 0dB -0.1dB q1 CSI-RS during T2: 0dB -0.1dB q1 CSI-RS during T3, T4 and T5: 0dB +0.1dB	SNR during: T1: +5.4dB T2: -2.6dB T3: -12.4dB T4: -12.4dB T5: -12.4dB For testing of a UE which supports 4RX on all bands, the SNR for RS in set q0 during T3, T4, and T5 is -15dB-TT = -15.4dB (including test tolerances) q1 CSI-RS during T1: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10.1dB q1 CSI-RS during T2: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: -10.1dB q1 CSI-RS during T3, T4 and T5: Noc_1: -98dBm/15kHz $\hat{E}s_1 / Noc_1$: +10.1dB
14.4.2.4 NR SA FR1 Beam Failure Detection and Link Recovery Test	Same as 14.4.2.3	Same as 14.4.2.3	Same as 14.4.2.3

for PCell configured with CSI-RS-based BFD and LR in DRX mode for Satellite Access			
14.5.1.1 SA FR1 event triggered reporting tests without gap under non-DRX for NR satellite access	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: +4.00dB	During T1: 0dB 0dB 0dB During T2: 0dB 0dB 0dB	During T1: Noc: -98dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: -infinity During T2: Noc: -98dBm/15kHz Ês1 / Noc: +4.00dB Ês2 / Noc: +4.00dB
14.5.1.2 SA FR1 Event triggered reporting tests without gap under DRX for NR satellite access	Same as 14.5.1.1	Same as 14.5.1.1	Same as 14.5.1.1
14.5.1.3 SA FR1 event triggered reporting tests without gap under non-DRX with FDD PCell with SSB index reading for NR satellite access	Same as 14.5.1.1	Same as 14.5.1.1	Same as 14.5.1.1
14.5.1.4 SA FR1 event triggered reporting tests with single measurement gap under non-DRX for satellite access for NR satellite access	Same as 14.5.1.1	Same as 14.5.1.1	Same as 14.5.1.1
14.5.1.5 SA FR1 event triggered reporting tests with FNO concurrent gaps under DRX for satellite access for NR satellite access	Same as 14.5.1.1	Same as 14.5.1.1	Same as 14.5.1.1
14.5.1.6 SA FR1 event triggered reporting tests with PPO concurrent gaps under non-DRX with SSB index reading for satellite access for NR satellite access	Same as 14.5.1.1	Same as 14.5.1.1	Same as 14.5.1.1
14.5.2.1 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with single gap for satellite access	During T1: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +4.00dB $Ês_2$ / Noc_2: -infinity During T2: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +4.00dB $Ês_2$ / Noc_2: +7.00dB	During T1: 0dB 0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB	During T1: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +4.00dB $Ês_2$ / Noc_2: -infinity During T2: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $Ês_1$ / Noc_1: +4.00dB $Ês_2$ / Noc_2: +7.00dB
14.5.2.2 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is used with single gap for satellite access	Same as 14.5.2.1	Same as 14.5.2.1	Same as 14.5.2.1
14.5.2.3 NR SA FR1-FR1 Event-triggered reporting with SSB time index detection when DRX is not used with single gap for satellite access	Same as 14.5.2.1	Same as 14.5.2.1	Same as 14.5.2.1
14.5.2.4 NR SA FR1-FR1 Event-triggered reporting without SSB time index	During T1: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz	During T1: 0dB 0dB	During T1: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz

detection when DRX is not used with two concurrent fully non-overlapped (FNO) gaps for satellite access	$\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: -infinity $\hat{E}s_3$ / Noc_2: -infinity During T2: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: +7.00dB $\hat{E}s_3$ / Noc_2: +7.00dB	0dB 0dB 0dB During T2: 0dB 0dB 0dB 0dB 0dB	$\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: -infinity $\hat{E}s_3$ / Noc_2: -infinity During T2: Freq 1 Noc_1: -98dBm/15kHz Freq 2 Noc_2: -98dBm/15kHz $\hat{E}s_1$ / Noc_1: +4.00dB $\hat{E}s_2$ / Noc_2: +7.00dB $\hat{E}s_3$ / Noc_2: +7.00dB
14.5.2.6 NR SA FR1-FR1 Event-triggered reporting without SSB time index detection when DRX is not used with two concurrent partial overlapping (PPO) gaps for satellite access	Same as 14.5.2.4	Same as 14.5.2.4	Same as 14.5.2.4
14.6.3.1 NR SA FR1 SS-SINR Measurement Accuracy for Satellite Access	Test 1: N_{oc}: -93dBm/15kHz $\hat{E}s_1$ / N_{oc}: +4.54dB $\hat{E}s_2$ / N_{oc}: +2.66dB Reported SINR values: ±3.5dB Test 2: N_{oc}: -116dBm/15kHz $\hat{E}s_1$ / N_{oc}: -4dB $\hat{E}s_2$ / N_{oc}: -4dB Reported SINR values: ±3.5dB	Test 1: 0dB 0dB 0dB Via mapping Test 2: 0dB 0.5dB 0.5dB Via mapping	Test 1: N_{oc}: -93dBm/15kHz $\hat{E}s_1$ / N_{oc}: +4.54dB $\hat{E}s_2$ / N_{oc}: +2.66dB SINR_31 to SINR_49 Test 2: N_{oc}: -116dBm/15kHz $\hat{E}s_1$ / N_{oc}: -3.5dB $\hat{E}s_2$ / N_{oc}: -3.5dB SINR_28 to SINR_45
The derivation of the SINR values takes into account the uncertainty in Cell 2 SS- SINR from N_{oc} and $\hat{E}s_2$ / N_{oc}, the allowed UE reporting accuracy, and the UE mapping function. The SS- SINR values given above are for normal conditions. For extreme conditions, the SS- SINR values are 0.5dB wider at each end.			
14.6.3.2 NR SA FR1-FR1 SS-SINR Measurement Accuracy for Satellite Access	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s_1$ / N_{oc1}: -1.75dB $\hat{E}s_2$ / N_{oc2}: -1.75dB Absolute Reported SINR values: ±3dB Relative Reported SINR values: ±3.5dB Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s_1$ / N_{oc1}: 20dB $\hat{E}s_2$ / N_{oc2}: 20dB Absolute Reported SINR values: ±3dB Relative Reported SINR values: ±3.5dB Test 3: N_{oc1}: -119.5dBm/15kHz N_{oc2}: -119.5dBm/15kHz $\hat{E}s_1$ / N_{oc1}: -4dB $\hat{E}s_2$ / N_{oc2}: -4dB Absolute Reported SINR values: ±3.5dB Relative Reported SINR values: ±4dB	Test 1: 0dB 0dB 0dB 0dB Via mapping Via mapping Test 2: 0dB 0dB 0dB 0dB Via mapping Via mapping Test 3: 0dB 0dB 1.9dB 1.9dB Via mapping Via mapping	Test 1: N_{oc1}: -88 dBm/15kHz N_{oc2}: -88 dBm/15kHz $\hat{E}s_1$ / N_{oc1}: -1.75dB $\hat{E}s_2$ / N_{oc2}: -1.75dB SINR_35 to SINR_51 SINR_x-10 to SINR_x+10 Test 2: N_{oc1}: -108.5dBm/15kHz N_{oc2}: -108.5dBm/15kHz $\hat{E}s_1$ / N_{oc1}: 20dB $\hat{E}s_2$ / N_{oc2}: 20dB SINR_79 to SINR_94 SINR_x-10 to SINR_x+10 Test 3: N_{oc1}: -119.5dBm/15kHz N_{oc2}: -119.5dBm/15kHz $\hat{E}s_1$ / N_{oc1}: -2.1dB $\hat{E}s_2$ / N_{oc2}: -2.1dB SINR_34 to SINR_51 SINR_x-11 to SINR_x+11
The derivation of the SINR values takes into account the uncertainty in Cell 2 SS- SINR from N_{oc} and $\hat{E}s_2$ / N_{oc}, the allowed UE reporting accuracy, and the UE mapping function. The SS- SINR values given above are for normal conditions. For extreme conditions, the SS- SINR values are 1dB wider at each for Tests 1 and 2 and 0.5dB wider at each end for Test 3.			
14.6.4.1 NR SA FR1 SSB based L1-RSRP Measurement Accuracy for Satellite Access	Test 1: N_{oc1}: -94.65 dBm/15kHz $\hat{E}s_1$ / N_{oc1}: 10dB Reported L1-RSRP values: ±8.5dB (±3dB additionally for extreme conditions)	Test 1: 0dB 0dB Via mapping	Test 1: N_{oc1}: -94.65dBm/15kHz $\hat{E}s_1$ / N_{oc1}: 10dB RSRP_62 to RSRP_82

	Reported differential L1-RSRP values for normal conditions: -4.6dB to 0dB Reported differential L1-RSRP values for extreme conditions: -5.6dB to 0dB Test 2: N_{oc1}: -117dBm/15kHz $\hat{E}s_1 / N_{oc1}$: -3dB Reported L1-RSRP values: ±5dB (±4.5dB additionally for extreme conditions) Reported differential L1-RSRP values for normal conditions: -4.6dB to 0dB Reported differential L1-RSRP values for extreme conditions: -5.6dB to 0dB	Via mapping Via mapping Test 2: 0dB 0.8dB Via mapping Via mapping Via mapping	DIFFRSRP_0 to DIFFRSRP_2 DIFFRSRP_0 to DIFFRSRP_2 Test 2: N_{oc1}: -117dBm/15kHz $\hat{E}s_1 / N_{oc1}$: -2.2dB RSRP_31 to RSRP_44 DIFFRSRP_0 to DIFFRSRP_2 DIFFRSRP_0 to DIFFRSRP_2
14.6.4.2 NR SA FR1 CSI-RS based L1-RSRP Measurement Accuracy for Satellite Access	Same as 14.6.4.1	Same as 14.6.4.1	Same as 14.6.4.1

Annex G (normative): Statistical testing

G.1 General

The test requirements are expressed as absolute requirements with a single value stating the requirement or expressed as a success rate. The statistical nature depends on the type of test requirement. Some have large statistical variations, while others are not statistical in nature at all. When testing a parameter with a statistical nature, a confidence level is set. This establishes the probability that a Device Under Test (DUT) passing the test actually meets the test requirement and determines how many times a test have to be repeated and what the pass and fail criteria is. This Annex describes how to set the statistical significance.

G.2 Statistical testing of delay and UE measurement performance in RRM tests

G.2.1 General

The RRM tests are either of deterministic or of statistical nature. The pass fail limits in tests of statistical nature are expressed as a limit (e.g. delay limit) and a success ratio applicable for the limit. The success ratio is 90% uniform (the complement is the error ratio ER = 10%).

G.2.2 Design of the test

The test is defined by the following design principles (see TS 36.521-1 clause G.X, Theory):

1) The early decision concept is applied.

2) A second limit is introduced: bad DUT factor M>1

To decide the test pass:

Supplier risk is applied based on the bad DUT quality

To decide the test fails

Customer risk is applied based on the specified DUT quality

The test is defined by the following parameters:

1) Limit ER = 0.1 (success ratio = 90%)

2) Bad DUT factor M=1.5 (selectivity)

3) Confidence level CL = 95% (for specified DUT and bad DUT-quality)

G.2.3 Numerical definition of the pass fail limits

Editor's Note:

- Further investigate the technical details behind this statistical method to ensure that this is applicable for FR2 radiated test cases.

Table G.2.3-1: pass fail limits

ne	ns_p	ns_f	ne	ns_p	ns_f	ne	ns_p	ns_f	ne	ns_p	ns_f
0	33	NA	43	408	283	86	737	644	129	1056	1021
1	46	NA	44	416	291	87	745	653	130	1064	1030
2	58	NA	45	424	299	88	752	661	131	1071	1039
3	69	NA	46	432	307	89	760	670	132	1078	1048
4	79	NA	47	440	315	90	767	679	133	1086	1057

5	89	NA	48	447	324	91	775	687	134	1093	1066
6	99	NA	49	455	332	92	782	696	135	1100	1074
7	109	NA	50	463	340	93	790	705	136	1108	1083
8	118	NA	51	471	348	94	797	713	137	1115	1092
9	127	NA	52	478	356	95	804	722	138	1122	1101
10	136	39	53	486	365	96	812	731	139	1130	1110
11	145	45	54	494	373	97	819	739	140	1137	1119
12	154	51	55	502	381	98	827	748	141	1144	1128
13	163	58	56	509	389	99	834	757	142	1152	1137
14	172	64	57	517	398	100	842	766	143	1159	1147
15	180	71	58	525	406	101	849	774	144	1166	1155
16	189	78	59	532	414	102	857	783	145	1174	1164
17	197	85	60	540	423	103	864	792	146	1181	1173
18	206	92	61	548	431	104	871	801	147	NA	1182
19	214	99	62	555	440	105	879	809	148		
20	223	106	63	563	448	106	886	818	149		
21	231	113	64	571	456	107	894	827	150		
22	239	120	65	578	465	108	901	836	151		
23	248	128	66	586	473	109	909	844	152		
24	256	135	67	594	482	110	916	853	153		
25	264	142	68	601	490	111	923	862	154		
26	272	150	69	609	499	112	931	871	155		
27	281	157	70	616	507	113	938	880	156		
28	289	165	71	624	516	114	946	888	157		
29	297	173	72	632	524	115	953	897	158		
30	305	180	73	639	533	116	960	906	159		
31	313	188	74	647	541	117	968	915	160		
32	321	196	75	654	550	118	975	924	161		
33	329	204	76	662	558	119	983	933	162		
34	337	211	77	669	567	120	990	941	163		
35	345	219	78	677	575	121	997	950	164		
36	353	227	79	684	584	122	1005	959	165		
37	361	235	80	692	592	123	1012	968	166		
38	369	243	81	700	601	124	1019	977	167		
39	377	251	82	707	610	125	1027	986	168		
40	385	259	83	715	618	126	1034	994	169		
41	393	267	84	722	627	127	1042	1003			
42	400	275	85	730	635	128	1049	1012			

The first column is the number of errors (ne = number of exceeded delays or number of wrong reports)

The second column is the number of samples for the pass limit (ns_p , ns=Number of samples= number of successes + number of exceedings or number of reports)

The third column is the number of samples for the fail limit (ns_f)

G.2.4 Pass fail decision rules

The pass fail decision rules apply for a single test, comprising one component in the test vector. The over all Pass /Fail conditions are defined in clause G.2.6

Having observed 0 errors, pass the test at 33+ samples, otherwise continue

Having observed 1 error, pass the test at 46+ samples, otherwise continue

Having observed 2 errors, pass the test at 58+ samples, otherwise continue

Having observed 10 errors, pass the test at 136+ samples, fail the test at 39 samples, otherwise continue

Having observed 146 errors, pass the test at 1181+ samples, fail the test at 1173- samples, otherwise continue

Having observed 147 errors, fail the test at 1182- samples,

Where x+ means: x or more, x- means x or less

NOTE 1: an ideal DUT passes after 33 samples. The maximum test time is 1181 samples.

G.2.5 Void

G.2.6 Test conditions for delay tests and UE measurement performance

Table G.2.6-1: test conditions

Test	Statistical independence	Number of components in the test vector, as specified in the test requirements and initial conditions of the applicable test	Over all Pass/Fail condition
All tests in clauses 4.4.3, 4.5, 4.6, 5.4.3, 5.5, 5.6, 6.1, 6.2, 6.3.1, 6.3.2.1, 6.3.2.3, 6.4.3, 6.5, 6.6, 7.1, 7.2, 7.3.1, 7.3.2.1, 7.3.2.3, 7.4.3, 7.5, 7.6, 10.1.2, 10.2.2, 10.3, 10.4, 11.1, 11.2.1, 11.2.2.1, 11.2.2.3, 11.3.2, 11.4, 11.5, 12.1, 12.2, 12.3, 12.4, 13.1.2, 13.2, 13.3, 16.1, 16.2, 16.3.1, 16.3.2.1, 16.3.2.3, 16.5, 16.6, 17.1, 17.2, 17.3.1, 17.3.2.1, 17.3.2.3, 17.4.3, 17.5, 17.6, 18.1, 18.2, 18.3 are delay tests of statistical nature while 4.3.2.2, 4.4.1, 5.3.2.2, 5.4.1, 6.3.2.2, 6.4.1, 7.3.2.2, 7.4.1, 10.1.1.1, 10.2.1.1, 11.2.2.2, 11.3.1, 13.1.1, 16.3.2.2, 16.4.1, 17.3.2.2, 17.4.1 are not applicable, since they are deterministic.	Test procedure in all statistical tests ensures independency	1 per operating band (if tested, see 3A.3)	Full set of environmental conditions (5) per operating band
All tests in clauses 4.7, 5.7, 6.7 and 7.7, 10.5, 11.6, 12.5, 13.4, 16.7, 17.7 are UE level reports of statistical nature	Independency is assumed, although Layer 1 filtering is applied to the reported results	Full set of environmental conditions (5) per operating band	Full set of environmental conditions (5) per operating band

G.2.7 Additional considerations for tests in bands subject to CCA failure

The scope of shared spectrum RRM tests is similar to their corresponding licensed carrier tests. However, the unlicensed channel accessibility is subject to a probabilistic Clear Channel Assessment (CCA) model and therefore is not guaranteed. This model applies independently to DL ($P_{CCA_DL_i}$) and UL (P_{CCA_UL}) and is defined in section D.7.

The SS has knowledge on whether a given DL or UL slot is subject to CCA failure:

- In DL slots subject to CCA failure the SS will not schedule the slot
- In UL slots subject to CCA failure the SS will occupy the channel according to section D.7.2.2

Due to the statistical nature of the CCA model, iterations can fail. In the event the SS detects a failure caused by CCA failure, the SS shall declare that iteration as inconclusive (remove it from the count) and continue testing.

Table G.2.7-1 lists test cases from sections 10, 11, 12 and 13 that have been considered as untestable due to issues related with how the CCA model impacts the test outcome. Unless otherwise listed in Table G.2.7-1, all tests from sections 10, 11, 12 and 13 can be executed following the statistical methodology defined in clause G.2.3.

Table G.2.7-1: Test cases in bands subject to CCA failure with testability issues

Test Case	Channel Access Mode	$P_{CCA_DL_i}$	P_{CCA_UL}	Testability Issue Reason

11.2.2.2.1	Semi-static	N/A	0.87	SS may not be able to identify whether a missing PRACH was caused by CCA failure as UE does not have a fixed schedule
	Dynamic	N/A	0.75	
11.2.2.2.2	Semi-static	N/A	0.87	SS may not be able to identify whether a missing PRACH was caused by CCA failure as UE does not have a fixed schedule
	Dynamic	N/A	0.75	
11.2.2.2.3	Semi-static	N/A	0.87	SS may not be able to identify whether a missing PRACH was caused by CCA failure as UE does not have a fixed schedule
	Dynamic	N/A	0.75	
11.2.2.2.4	Semi-static	N/A	0.87	SS may not be able to identify whether a missing PRACH was caused by CCA failure as UE does not have a fixed schedule
	Dynamic	N/A	0.75	

G.3 Statistical testing of NR sidelink CBR measurement tests

G.3.1 General

The CBR measurement tests are of statistical nature. The pass fail limits in tests of statistical nature are expressed as a limit (e.g. delay limit) and a success ratio applicable for the limit. The success ratio is 98% (the complement is the error ratio ER = 2%).

G.3.2 Design of the test

The test is defined by the following design principles (see TS 36.521-1 clause G.7, Theory):

1) The early decision concept is applied.

2) A second limit is introduced: bad DUT factor M>1

To decide the test pass:

- Supplier risk is applied based on the bad DUT quality

To decide the test fails

- Customer risk is applied based on the specified DUT quality

The test is defined by the following parameters:

1) Limit ER = 0.02 (success ratio = 98%)

2) Bad DUT factor M=1.5 (selectivity)

3) Confidence level CL = 95% (for specified DUT and bad DUT-quality)

G.3.3 Numerical definition of the pass fail limits

Table G.3.3-1: pass fail limits for ER = 0.02

ne	ns_p	ns_f	ne	ns_p	ns_f	ne	ns_p	ns_f	ne	ns_p	ns_f
0	206	N/A	43	1970	1389	86	6370	3300	129	6413	5409
1	287	N/A	44	2005	1431	87	6371	3348	130	6414	5459
2	345	N/A	45	2041	1468	88	6372	3396	131	6415	5511
3	398	10	46	2078	1511	89	6373	3443	132	6416	5560
4	447	23	47	2113	1555	90	6374	3492	133	6417	5613
5	494	39	48	2149	1600	91	6375	3537	134	6418	5660
6	540	57	49	6333	1637	92	6376	3585	135	6419	5712

7	585	78	50	6334	1683	93	6377	3631	136	6420	5765
8	629	102	51	6335	1728	94	6378	3683	137	6421	5811
9	671	130	52	6336	1768	95	6379	3728	138	6422	5866
10	714	155	53	6337	1813	96	6380	3778	139	6423	5915
11	756	182	54	6338	1857	97	6381	3828	140	6424	5970
12	797	212	55	6339	1900	98	6382	3874	141	6425	6020
13	838	243	56	6340	1938	99	6383	3922	142	6426	6069
14	879	276	57	6341	1982	100	6384	3971	143	6427	6124
15	918	306	58	6342	2028	101	6385	4018	144	N/A	6427
16	959	342	59	6343	2072	102	6386	4070	145		
17	998	375	60	6344	2116	103	6387	4118	146		
18	1037	408	61	6345	2161	104	6388	4169	147		
19	1077	442	62	6346	2203	105	6389	4216	148		
20	1115	480	63	6347	2246	106	6390	4264	149		
21	1154	517	64	6348	2292	107	6391	4314	150		
22	1192	553	65	6349	2338	108	6392	4358	151		
23	1230	591	66	6350	2382	109	6393	4413	152		
24	1269	629	67	6351	2427	110	6394	4462	153		
25	1306	666	68	6352	2473	111	6395	4506	154		
26	1344	706	69	6353	2516	112	6396	4561	155		
27	1382	741	70	6354	2559	113	6397	4611	156		
28	1420	777	71	6355	2608	114	6398	4661	157		
29	1457	815	72	6356	2652	115	6399	4712	158		
30	1494	855	73	6357	2694	116	6400	4760	159		
31	1531	898	74	6358	2741	117	6401	4807	160		
32	1568	936	75	6359	2789	118	6402	4854	161		
33	1605	976	76	6360	2836	119	6403	4909	162		
34	1642	1015	77	6361	2883	120	6404	4960	163		
35	1679	1059	78	6362	2928	121	6405	5010	164		
36	1715	1098	79	6363	2971	122	6406	5062	165		
37	1752	1138	80	6364	3018	123	6407	5110	166		
38	1788	1180	81	6365	3068	124	6408	5158	167		
39	1825	1220	82	6366	3115	125	6409	5204	168		
40	1861	1263	83	6367	3162	126	6410	5256	169		
41	1897	1302	84	6368	3203	127	6411	5305			
42	1933	1344	85	6369	3251	128	6412	5358			

The first column is the number of errors (ne = number of exceeded delays or number of wrong reports)

The second column is the number of samples for the pass limit (ns_p , ns=Number of samples= number of successes + number of wrong reports)

The third column is the number of samples for the fail limit (ns_f)

G.3.4 Pass fail decision rules

The pass/fail decision rules apply for a single test, comprising one component in the test vector. The over all pass/fail conditions are defined in clause G.2.6:

Having observed 0 error, pass the test at 206+ samples, otherwise continue,

Having observed 1 error, pass the test at 287+ samples, otherwise continue,

Having observed 2 errors, pass the test at 345+ samples, otherwise continue,

Having observed 3 errors, pass the test at 398+ samples, fail the test at 10- samples, otherwise continue,

…

Having observed 143 errors, pass the test at 6427+ samples, fail the test at 6124- samples, otherwise continue,

Having observed 144 errors, fail the test at 6427- samples,

Where x+ means: x or more, x- means x or less.

NOTE 1: an ideal DUT passes after 206 samples. The maximum test time is 6427 samples.

G.4 Theory to derive the numbers in Table G.2.3-1 (informative)

TS 36.521-1 Anne4 G.X applies.

G.5 Theory to derive the numbers in Table G.3.3-1 (informative)

TS 36.521-1 Annex G.7 applies except that:

- 36.521-1 Annex G.7.9 is replaced by G.5.1 and G.5.2.

G.5.1 Algorithm to calculate pass and fail probabilities

Following basic assumptions for statistical testing are introduced in this clause:

- Result of single iteration of test procedure loop obeys Bernoulli distribution with error ratio p, i.e. the probability that the TE observes expected UE behaviour in single iteration (counted as a success) is $1 - p$ and the probability that the TE doesn't observe expected UE behaviour in single iteration (counted as a fail) is p.
- Results of different iterations are independent and identically distributed (i.i.d).
- Early decision concept is applied, i.e., the TE repeats multiple iterations of the test procedure loop. For each iteration the TE records its result (count as a success if the TE observes the expected behavior, count as a fail otherwise) and its index in all iterations. When the i-th fail is observed in e_i-th iteration, the TE compares e_i with corresponding pass limit $N_{p,i}$ and fail limit $N_{f,i}$. The TE shall:
  - terminate the test and decide the DUT passes the test if $e_i > N_{p,i}$
  - terminate the test and decide the DUT fails the test if $e_i \leq N_{f,i}$,
  - continue the test and make no decision if $N_{f,i} < e_i \leq N_{p,i}$.

For a more intuitive understanding, we use the state transition diagram shown in Figure G.5.1-1 to describe the entire process of statistical testing. In Figure 1, X-axis and Y-axis denote the success count and fail count in iterations already executed respectively. And the point with coordinate (i, j) (referred as *state* (i, j) thereafter) is used to indicates that the DUT has executed $i + j$ iterations which includes i successes and j fails, where $i, j \geq 0$.

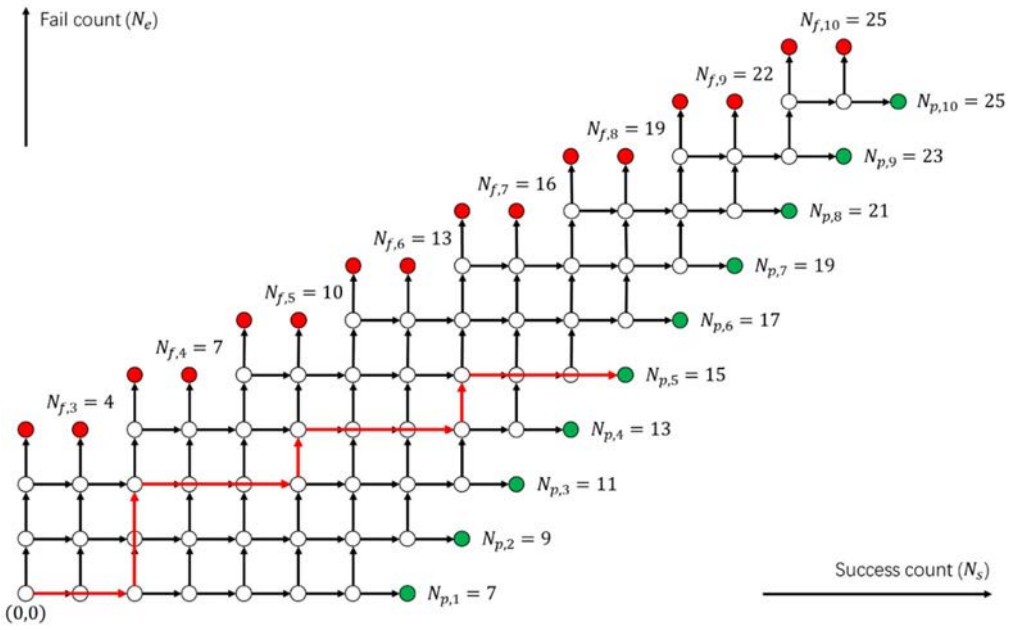

Figure G.5.1-1: Visualization of early decision statistical testing process. In this example, the TE verdicts that the DUT passes the test after executing 15 iterations of test procedure loop. The results of these 15 iterations are "s", "f", "f", "s", "s", "s", "f", "s", "s", "s", "f", "s", "s" and "s" in order ("s" = "success" and "f" = "fail")

From Figure G.5.1-1 it's straightforward to get following observations:

- The DUT is always in state $(0,0)$ at the beginning of statistical test since no iteration is executed at that moment.
- Assume the DUT is in state (i,j) after executing $i+j$ iterations. Then,
  - if the $i+j+1$-th iteration counts a success (with probability $1-p$), the success count shall increase 1 and fail count shall remain unchanged after the $i+j+1$-th iteration. As a result, the DUT will be in state $(i+1,j)$ after the $i+j+1$-th iteration. We call that the DUT moves from state (i,j) to state $(i+1,j)$, depicted as moving right by one in the diagram.
  - if the $i+j+1$-th iteration counts a fail (with probability p), the success count remains unchanged and the fail count increases 1 after the $i+j+1$-th iteration. Then the DUT will be in state $(i,j+1)$ after the $i+j+1$-th iteration. We call that the DUT moves from state (i,j) to state $(i,j+1)$, depicted as moving up by one in the diagram.
- The TE shall evaluate whether pass criteria or fail criteria is satisfied every time the DUT has executed a new iteration, i.e. the DUT moves to a new state. Specifically speaking,
  - If pass criterion is satisfied when DUT is in state (i,j), the TE makes the decision that the DUT passes the test. Correspondingly, state (i,j) is referred as a passing state (depicted as green points in Figure G.5.1-1);
  - If fail criterion is satisfied when DUT is in state (i,j), the TE makes the decision that the DUT fails the test. Correspondingly, state (i,j) is referred as a failure state (depicted as red points in Figure G.5.1-1).
  - If neither pass criterion nor fail criterion is satisfied when DUT is in state (i,j), the TE makes no decision and continues the test. Correspondingly, state (i,j) is referred as a non-decidable state (depicted as hollow points in Figure G.5.1-1).

In this way, the statistical testing is represented as a process in which the DUT starts from state $(0,0)$, moves along certain path in the diagram, and finally stops in certain passing state or failure state.

Obviously, there must be a close relationship between the pass/fail states and the pass/fail limits used for the test. The following two conclusions precisely describes the mapping between pass/fail limits and pass/fail states.

Conclusion 1: The DUT is decided to pass the test if and only if the DUT moves from state $(0,0)$ to a state belongs to passing state set $\mathcal{P} = \{(N_{p,i+1} - i, i): i = 0,1,2,\cdots\}$.

Proof: We prove sufficiency first, and then necessity.

- **Sufficiency**: If the DUT is in state $(N_{p,i+1} - i, i)$, it means that the DUT has executed $N_{p,i+1}$ iterations which includes i success and $N_{p,i+1} - i$ fails. Clearly, the TE can only get the i+1-th fail as early as the $N_{p,i+1} + 1$-th iteration, then we have $e_{i+1} > N_{p,i+1}$. This is just the pass criterion when the TE collecting the i+1-th fail.

- **Necessity**: If the TE verdicts the DUT to pass when it collects the i+1-th fail, following inequations must have been satisfied according to the pass criterion:

$$e_1 \le N_{p,1}, e_2 \le N_{p,2}, \cdots, e_i \le N_{p,i}, e_{i+1} > N_{p,i+1}.$$

  The DUT is in state $(e_i - i, i)$ when the i-th fail happens in the e_i-th iteration. Then the next $N_{p,i+1} - e_i$ iterations after the e_i-th iteration must be counted as success since $e_{i+1} > N_{p,i+1}$. Then the DUT will be in state $(N_{p,i+1} - i, i)$ after executing these $N_{p,i+1} - e_i$ iterations.

Conclusion 2: The DUT is decided to fail the test if and only if the DUT moves from state $(0,0)$ to a state belongs to failure set $\mathcal{F} = \{(j, i+1): N_{f,i} - i < j \le N_{f,i+1} - (i+1), i = 0,1,2,\cdots\}$, where $N_{f,0} \triangleq -1$ for sake of simplify.

Proof of conclusion 2 is quite similar as the proof of conclusion 1 and is omitted here. Conclusion 1 and 2 have shown the equivalence between pass/fail limits and pass/fail state sets. As a result, the probability that the DUT pass the test for given error ratio p, passing state set $\mathcal{P}$ and failure state set $\mathcal{F}$, denoted as $\mathbb{P}_p(\mathcal{P}, \mathcal{F})$, is given by

$$\mathbb{P}_p(\mathcal{P}, \mathcal{F}) = \text{Prob}\{\text{DUT moves from state}(0,0) \text{ to state } (i,j) \text{ which belongs to } \mathcal{P}\}.$$

Furthermore, it's easy to prove that any path from state$(0,0)$ to passing state (i,j) won't pass through any passing state or failure state except the ending state. This is because if the path contains a passing state or failure state (i', j') which is not the ending state, the test will be terminated immediately when the DUT is in state (i', j'). Then (i', j') shall be the ending state, i.e. $(i', j') = (i, j)$. This contradicts the assumption that state (i', j') is not the ending state. This also means that two events "DUT moves from state $(0,0)$ to passing state (i,j)" and "DUT moves from state $(0,0)$ to passing state (i', j')" are disjoint if $(i', j') \neq (i, j)$. Then we have,

$$\mathbb{P}_p(\mathcal{P}, \mathcal{F}) = \sum_{(i,j)\in\mathcal{P}} \text{Prob}\{\text{DUT moves from state}(0,0) \text{ to passing state } (i,j)\} = \sum_{(i,j)\in\mathcal{P}} T^p_{(i,j)}(\mathcal{P}, \mathcal{F}),$$

where $T^p_{(i,j)}(\mathcal{P}, \mathcal{F})$ is defined as the transition probability from state $(0,0)$ to state (i,j), i.e.

$$T^p_{(i,j)}(\mathcal{P}, \mathcal{F}) \triangleq \text{Prob}\{\text{DUT moves from state}(0,0) \text{ to state } (i,j)\}.$$

Similarly, the probability that the DUT fail the test for given error ratio p, passing state set $\mathcal{P}$ and failure state set $\mathcal{F}$, denoted as $\mathbb{F}_p(\mathcal{P}, \mathcal{F})$, is derived as

$$\mathbb{F}_p(\mathcal{P}, \mathcal{F}) = \sum_{(i,j)\in\mathcal{F}} T^p_{(i,j)}(\mathcal{P}, \mathcal{F})$$

From the discussion above we can observe that the calculation of the $\mathbb{P}_p(\mathcal{P}, \mathcal{F})$ and $\mathbb{F}_p(\mathcal{P}, \mathcal{F})$ is finally transformed into the calculation of the transition probability $T^p_{(i,j)}(\mathcal{P}, \mathcal{F})$. Assuming DUT is in state (i,j) after the $i+j$-th iteration, $i, j \ge 0$. Considering that the $i+j$-th iteration can only have two possible results: success or fail, we can derive that the DUT can only be in state $(i-1, j)$ or state $(i, j-1)$ after executing $i+j-1$ iterations. Then we have:

$$\begin{aligned} T^p_{(i,j)}(\mathcal{P}, \mathcal{F}) = {} & \text{Prob}\{\text{DUT moves from state}(0,0) \text{ to state } (i,j), \text{passing } (i-1,j)\} \\ & + \text{Prob}\{\text{DUT moves from state}(0,0) \text{ to state } (i,j), \text{passing state } (i,j-1)\} \\ & = \text{Prob}\{\text{DUT moves from state}(0,0) \text{ to } (i-1,j)\}\text{Prob}\{\text{DUT moves from state } (i-1,j) \text{ to } (i,j)\} \\ & + \text{Prob}\{\text{DUT moves from state}(0,0) \text{ to } (i,j-1)\}\text{Prob}\{\text{DUT moves from state } (i,j-1) \text{ to } (i,j)\} \end{aligned}$$

The first equation above holds because the event "DUT moves from state $(0,0)$ to state (i,j), passing state $(i,j-1)$" and event "DUT moves from state $(0,0)$ to state (i,j), passing state $(i-1,j)$" are disjoint. And the second equation above holds because results of different iterations are independent.

Furthermore, we have following obvious observations:

If $i = 0$, obviously the event "DUT moves from state $(0,0)$ to state $(i-1, j)$" won't happen since state $(i-1, j)$ doesn't exist in this case. Otherwise, the probability that this event occurs equals to $T^p_{(i-1,j)}(\mathcal{P}, \mathcal{F})$ according to the definition of transition probability. Then we have

$$\text{Prob}\{\text{DUT moves from state}(0,0) \text{ to } (i-1, j)\} = T^p_{(i-1,j)}(\mathcal{P}, \mathcal{F})\mathbb{I}_{i>0},$$

Similarly, we can also derive that

$$\text{Prob}\{\text{DUT moves from state}(0,0) \text{ to } (i, j-1)\} = T^p_{(i,j-1)}(\mathcal{P}, \mathcal{F})\mathbb{I}_{j>0},$$

Where, $\mathbb{I}_{i>0}$ and $\mathbb{I}_{j>0}$ are indicator functions,

$$\mathbb{I}_{i>0} = \begin{cases} 1, & \text{if } i > 0 \\ 0, & \text{otherwise} \end{cases}, \qquad \mathbb{I}_{j>0} = \begin{cases} 1, & \text{if } j > 0 \\ 0, & \text{otherwise} \end{cases}$$

If $(i-1, j) \in \mathcal{P} \cup \mathcal{F}$, the event "DUT moves from state $(i-1, j)$ to state (i, j)" won't happen since the test will be terminated when DUT reaches state $(i-1, j)$. Otherwise, this event is equivalent to the event "result of the $(i+j)$-th iteration is a success". Then we have

$$\text{Prob}\{\text{DUT moves from state } (i-1, j) \text{ to } (i, j)\} = (1-p)\mathbb{I}_{(i-1,j)\notin\mathcal{P}\cup\mathcal{F}}$$

Similarly, we can also derive that

$$\text{Prob}\{\text{DUT moves from state } (i, j-1) \text{ to } (i, j)\} = p\mathbb{I}_{(i,j-1)\notin\mathcal{P}\cup\mathcal{F}}.$$

where,

$$\mathbb{I}_{(i-1,j)\notin\mathcal{P}\cup\mathcal{F}} = \begin{cases} 1, & (i-1, j) \notin \mathcal{P} \cup \mathcal{F} \\ 0, & \text{otherwise} \end{cases}, \qquad \mathbb{I}_{(i,j-1)\notin\mathcal{P}\cup\mathcal{F}} = \begin{cases} 1, & \text{if } (i, j-1) \notin \mathcal{P} \cup \mathcal{F} \\ 0, & \text{otherwise} \end{cases}$$

Finally, we have shown that following conclusion holds.

Conclusion 3: Transition probability $T^p_{(i,j)}(\mathcal{P}, \mathcal{F})$ can be calculated by

$$T^p_{(i,j)}(\mathcal{P}, \mathcal{F}) = T^p_{(i-1,j)}(\mathcal{P}, \mathcal{F})(1-p)\mathbb{I}_{i>0}\mathbb{I}_{(i-1,j)\notin\mathcal{P}\cup\mathcal{F}} + T^p_{(i,j-1)}(\mathcal{P}, \mathcal{F})p\mathbb{I}_{j>0}\mathbb{I}_{(i,j-1)\notin\mathcal{P}\cup\mathcal{F}}.$$

The conclusion above shows that $T^p_{(i,j)}(\mathcal{P}, \mathcal{F})$ can be calculated in a dynamic programming manner: Clearly, we can calculate $T^p_{(i,j)}(\mathcal{P}, \mathcal{F})$ using the above equation if we know the value of $T^p_{(i-1,j)}(\mathcal{P}, \mathcal{F})$ and $T^p_{(i,j-1)}(\mathcal{P}, \mathcal{F})$; For the same reason, we can calculate $T^p_{(i-1,j)}(\mathcal{P}, \mathcal{F})$ and $T^p_{(i,j-1)}(\mathcal{P}, \mathcal{F})$ using the equation above if we know the value of $T^p_{(i-2,j)}(\mathcal{P}, \mathcal{F})$, $T^p_{(i-1,j-1)}(\mathcal{P}, \mathcal{F})$ and $T^p_{(i,j-2)}(\mathcal{P}, \mathcal{F})$; Repeating the recursion above, at last all we need to know is only $T^p_{(0,0)}(\mathcal{P}, \mathcal{F})$. And we know $T^p_{(0,0)}(\mathcal{P}, \mathcal{F}) = 1$ since UE always is in state $(0,0)$ when test starts.

Using the recursion above, we can finally obtain $T^p_{(i,j)}(\mathcal{P}, \mathcal{F})$ and further $\mathbb{P}_p(\mathcal{P}, \mathcal{F})$ and $\mathbb{F}_p(\mathcal{P}, \mathcal{F})$ for given p, $\mathcal{P}$ and $\mathcal{F}$.

Assume the limit-risk mapping given in 36.521-1 is still used. Then the customer risk R_c and supplier risk R_s for given passing state set $\mathcal{P}$ and failure state set $\mathcal{F}$ is the probability that baseline bad DUT (error ratio = Mp, where M is the bad DUT factor) passes the test and the probability that baseline good DUT (error ratio = mp, where m is the bad DUT factor) fails the test respectively. Then we have

$$R_c = \sum_{(i,j)\in\mathcal{P}} T^{Mp}_{(i,j)}(\mathcal{P}, \mathcal{F}), \quad R_s = \sum_{(i,j)\in\mathcal{F}} T^{mp}_{(i,j)}(\mathcal{P}, \mathcal{F}).$$

G.5.2 Method of designing pass/fail limit to approach given risk probability

For given error ratio p, confidence level P_{CL}, good DUT factor m and bad DUT factor M, pass limit $\{N_{p,i}, i = 1,2, \cdots\}$ and fail limit $\{N_{f,i}: i = 1,2, \cdots\}$ can be obtained by using the method listed below. Note that the limit-risk mapping in 36.521-1 is assumed.

Step 1: Initialize as follows:

- Set $\mathcal{P}$ and $\mathcal{F}$, passing state set and failure state set respectively, as $\mathcal{P}, \mathcal{F} = \emptyset$.
- Set R_c and R_s, customer risk and supplier risk respectively, as $R_c, R_s = 0$;
- Set n, number of executed iterations, as $n = 0$;
- Set $\mathcal{S}$, non-decidable state set after n-th iteration, as $\mathcal{S} = \{(0,0)\}$;
- Set $T_{(i,j)}^{mp}(\mathcal{P}, \mathcal{F})$ and $T_{(0,0)}^{Mp}(\mathcal{P}, \mathcal{F})$, transition probability to state $(0,0)$ for baseline good DUT and for baseline bad DUT respectively, as $T_{(i,j)}^{mp}(\mathcal{P}, \mathcal{F}) = 1$, $T_{(0,0)}^{Mp}(\mathcal{P}, \mathcal{F}) = 1$.
- Select Δ_c and Δ_s, step size for customer risk and supplier risk respectively, as $\Delta_c \leq 1 - P_{CL}$, $\Delta_s \leq 1 - P_{CL}$.



Figure G.5.2-1: Demonstration of step 1

Figure G.5.2-1 is the demonstration of step 1. The reason to initialize $= \{(0,0)\}$, $T_{(i,j)}^{mp}(\mathcal{P}, \mathcal{F}) = 1$, $T_{(0,0)}^{Mp}(\mathcal{P}, \mathcal{F}) = 1$ is because the DUT is always in state $(0,0)$ before executing any iteration. And we have $\mathcal{P}, \mathcal{F} = \emptyset$ since no passing state or failure state is selected yet.

Step 2: Calculate set $\mathcal{S}'$, the set of the state can be reached after the n+1-th iteration, as $\mathcal{S}' = \{(i,j): (i-1,j) \in \mathcal{S} \text{ or } (i,j-1) \in \mathcal{S}\}$. Then for all state $(i,j) \in \mathcal{S}'$, calculate $T_{(i,j)}^{Mp}(\mathcal{P}, \mathcal{F})$ and $T_{(i,j)}^{mp}(\mathcal{P}, \mathcal{F})$ as follows:

$$T_{(i,j)}^{Mp}(\mathcal{P}, \mathcal{F}) = T_{(i-1,j)}^{Mp}(\mathcal{P}, \mathcal{F})(1 - Mp)\mathbb{I}_{i>0}\mathbb{I}_{(i-1,j)\notin\mathcal{P}\cup\mathcal{F}} + T_{(i,j-1)}^{Mp}(\mathcal{P}, \mathcal{F})Mp\mathbb{I}_{j>0}\mathbb{I}_{(i,j-1)\notin\mathcal{P}\cup\mathcal{F}},$$

$$T_{(i,j)}^{mp}(\mathcal{P}, \mathcal{F}) = T_{(i-1,j)}^{mp}(\mathcal{P}, \mathcal{F})(1 - mp)\mathbb{I}_{i>0}\mathbb{I}_{(i-1,j)\notin\mathcal{P}\cup\mathcal{F}} + T_{(i,j-1)}^{mp}(\mathcal{P}, \mathcal{F})mp\mathbb{I}_{j>0}\mathbb{I}_{(i,j-1)\notin\mathcal{P}\cup\mathcal{F}}.$$

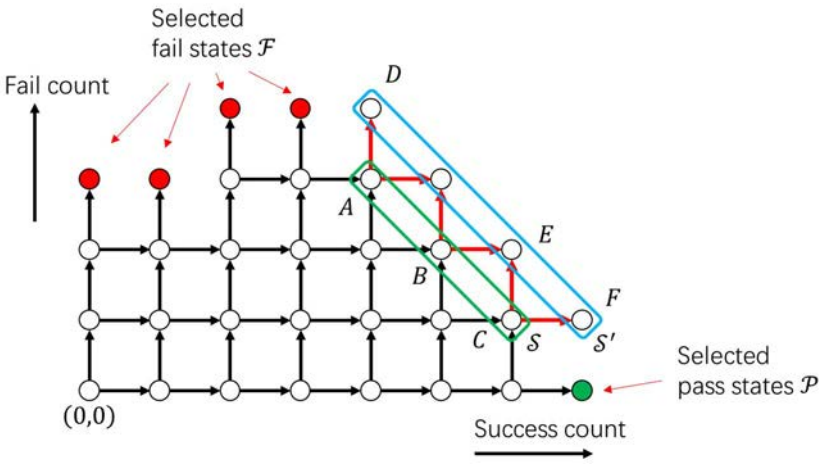

Figure G.5.2-2: Demonstration of step 2

See Figure G.5.2-2 for better understanding of step 2. If DUT doesn't pass or fail the test after the n-th iteration then DUT must be in one state in $\mathcal{S}$. It's easy to observe that the DUT must be in one state in $\mathcal{S}'$. Then the transition

probability to state in $\mathcal{S}'$ can be calculated by using Conclusion 3. For example, the only way to move to state D in Figure 2 is to first move to state A then count a fail in the n+1-th iteration, then we have $T_D^p = T_A^p p$. On the other hand, to move to state E, the DUT can first move to state B then count a success in the n+1-th iteration or first move to state C then count a fail in the n+1-the iteration, i.e. $T_E^p = T_B^p(1-p) + T_C^p p$.

Step 3: First, try finding an integer n_e which satisfies $(n+1-n_e, n_e) \in \mathcal{S}'$, $R_c + \sum_{\substack{(i,j)\in\mathcal{S}' \\ j\le n_e}} T_{(i,j)}^{Mp}(\mathcal{P},\mathcal{F}) \le 1 - P_{CL}$ and $R_s + \sum_{\substack{(i,j)\in\mathcal{S}' \\ j> n_e}} T_{(i,j)}^{mp}(\mathcal{P},\mathcal{F}) \le 1 - P_{CL}$. If such a n_e exists, let

$$R_c = R_c + \sum_{(i,j)\in\mathcal{S}', j\le n_e} T_{(i,j)}^{Mp}(\mathcal{P},\mathcal{F}), \quad R_s = R_s + \sum_{(i,j)\in\mathcal{S}', j> n_e} T_{(i,j)}^{mp}(\mathcal{P},\mathcal{F}),$$

$$\mathcal{P} = \mathcal{P} \cup \{(i,j): (i,j) \in \mathcal{S}', j \le n_e\}, \quad \mathcal{F} = \mathcal{F} \cup \{(i,j): (i,j) \in \mathcal{S}', j > n_e\},$$

If such a n_e doesn't exist, instead try finding integers n_p and n_f which satisfy

$$(n+1-n_p, n_p) \in \mathcal{S}', \quad (n+1-n_f, n_f) \in \mathcal{S}',$$

$$min(i_c\Delta_c, 1-P_{CL}) < R_c + \sum_{(i,j)\in\mathcal{S}', j\le n_p} T_{(i,j)}^{Mp}(\mathcal{P},\mathcal{F}) \le min\big((i_c+1)\Delta_c, 1-P_{CL}\big),$$

$$min(i_s\Delta_s, 1-P_{CL}) < R_s + \sum_{(i,j)\in\mathcal{S}', j\ge n_f} T_{(i,j)}^{mp}(\mathcal{P},\mathcal{F}) \le min\big((i_s+1)\Delta_s, 1-P_{CL}\big).$$

Then,

- if such a n_p exists, set

$$R_c = R_c + \sum_{(i,j)\in\mathcal{S}', j\le n_p} T_{(i,j)}^{Mp}(\mathcal{P},\mathcal{F}), \quad \mathcal{P} = \mathcal{P} \cup \{(i,j): (i,j) \in \mathcal{S}', j \le n_p\}, \quad i_c = i_c + 1.$$

- if such a n_f exists, set

$$R_s = R_s + \sum_{(i,j)\in\mathcal{S}', j\ge n_f} T_{(i,j)}^{mp}(\mathcal{P},\mathcal{F}), \quad \mathcal{F} = \mathcal{F} \cup \{(i,j): (i,j) \in \mathcal{S}', j \ge n_f\}, \quad i_s = i_s + 1.$$

Two possible cases in step 3 are depicted in figure G.5.2-3 and figure G.5.2-4 respectively. If n_e exists, even we add all states $(i,j) \in \mathcal{S}'$ with $j \le n_e$ to $\mathcal{P}$ and all states $(i,j) \in \mathcal{S}'$ with $j > n_e$ to $\mathcal{F}$, the customer risk and supplier risk are still no larger than $1 - P_{CL}$ (the increment of the customer risk and supplier risk, are denoted as blue and green triangle in figure 4 respectively).

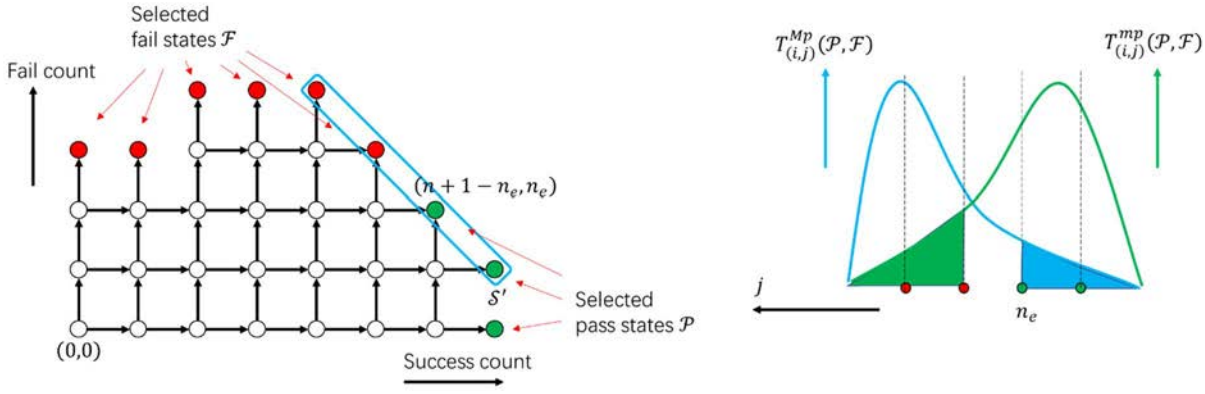

Figure G.5.2-3: Demonstration of step 3 (n_e exists)

If n_e doesn't exist, instead we try to find state set $\{(i,j): (i,j) \in \mathcal{S}', j \leq n_p\}$ which satisfies that the total transition probability to any state in the set is approximately Δ_c. If such a set exists we can add states in this set to $\mathcal{P}$ without breaking customer risk threshold. Similarly, we can also try to a state set$\{(i,j): (i,j) \in \mathcal{S}', j \geq n_f\}$ which satisfies that the total transition probability to any state in the set is approximately Δ_s and add states in this set to $\mathcal{F}$.

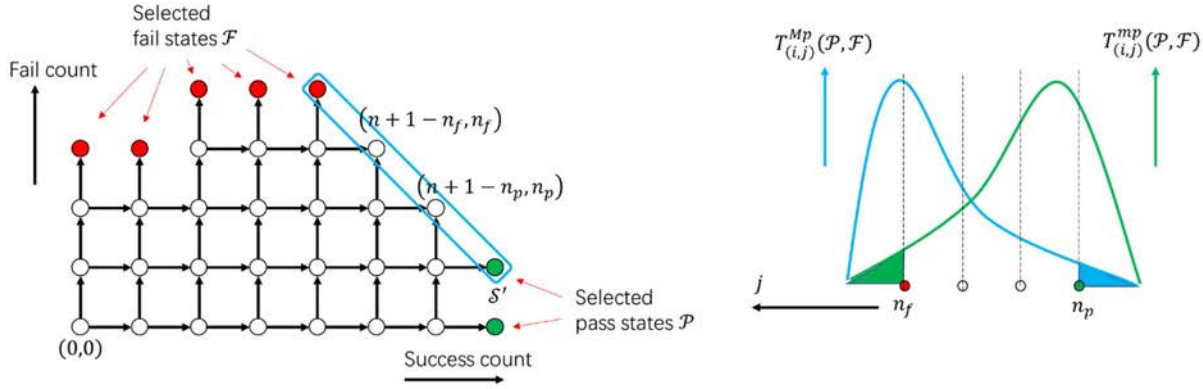

Figure G.5.2-4: Demonstration of step 3 (n_e doesn't exist)

Step 4: Let $\mathcal{S} = \mathcal{S}' \backslash (\mathcal{P} \cup \mathcal{F})$, $n = n + 1$. Then go back to Step 2 if $\mathcal{S} \neq \emptyset$, otherwise go to Step 5.

If a state $(i,j) \in \mathcal{S}'$ is selected as a passing state or failing state then it's no longer a non-decidable state. Then we need to exclude it from non-decidable state set after n+1-the iteration. If all states in $\mathcal{S}'$ are excluded, clearly the test surely will terminate after the n+1-the iteration and the designing is finished. Otherwise, we need to go back to step 2 and repeat procedures above.

Step 5: Sort all states (i,j) in $\mathcal{P}$ in the ascending order of j and all states (i,j) in $\mathcal{F}$ in the ascending order of i, i.e. we denote

$$\mathcal{P} = (A_0, 0), (A_1, 1), (A_2, 2), (A_3, 3) \cdots, \qquad \mathcal{F} = (0, B_0), (1, B_1), (2, B_2), (3, B_3), \cdots$$

Then construct passing state set $\mathcal{P}'$ and failure state set $\mathcal{F}'$ as

$$\mathcal{P}' = \{(A'_j, j): j = 0,1,2, \cdots\}, \qquad \mathcal{F}' = \{(i, B'_i): i = 0,1,2 \cdots\}$$

Where $A'_j = \min_{k \geq j} A_k$, $B'_i = \min_{k \geq i} B_i$

Purpose of step 5 is to further optimize the passing state and failure state obtained in step 2 to 4. To understand step 5, we only need to note that all path to passing state A, B must also pass state C, D. On the other hand, if a path passes state D or E, it must eventually reach one passing state in A, B and C. Then one can derive that

$$\sum_{(i,j) \in \{A,B,C\}} T^{p}_{(i,j)}(\mathcal{P},\mathcal{F}) = \sum_{(i,j) \in \{A,D,E\}} T^{p}_{(i,j)}(\mathcal{P},\mathcal{F})$$

In other words, if $\mathcal{P} = \{A, B, C\}$ is a passing set which satisfies customer risk requirements, then $\mathcal{P}' = \{A, D, E\}$ is also a passing set satisfying customer risk requirements since it has exactly the same customer risk as $\mathcal{P}$. But $\mathcal{P}'$ is a better choice than $\mathcal{P}$ since it requires fewer iterations to make decision.

For the same reason, we can also derive that failure set $\mathcal{F}' = \{F, G, L, M, N, K\}$ has same supplier risk with $\mathcal{F} = \{F, G, H, I, J, K\}$ but requires fewer iterations to fail the test.

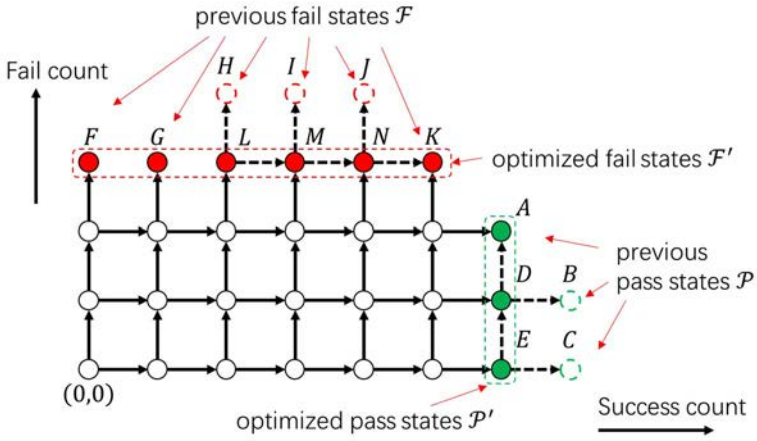

Figure G.5.2-5: Demonstration of step 3 (n_e doesn't exist).

Step 6: Construct pass limit $\{N_{p,i}\}$ and fail limit $\{N_{f,i}\}$ as follows:

$$N_{f,1} = \max_{B_i=1}(i + B_i), \quad N_{f,2} = \max_{B_i=2}(i + B_i), \quad N_{f,3} = \max_{B_i=3}(i + B_i), \quad \cdots$$

At last, we can convert pass/fail state sets to pass/fail limits by using conclusion 3 in Annex G.5.1.

Annex H (normative): Default message contents for RRM

H.1 Void

H.2 System information blocks message content exceptions

H.2.1 System information blocks message contents exceptions for NR intra frequency cell re-selection

SIB2: for NR intra-frequency cell re-selection

Table H.2.1-1: *SIB2*: NR intra frequency cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionInfoCommon SEQUENCE {			
rangeToBestCell	Not present		
}			
intraFreqCellReselectionInfo SEQUENCE {			
q-RxLevMin	-70	-140 is actual value in dBm (-70 * 2 dBm)	SCS15
	-69	-138 is actual value in dBm (-69 * 2 dBm)	SCS30
	-69	-138 is actual value in dBm (-69 * 2 dBm)	SCS120
	-68	-136 is actual value in dBm (-68 * 2 dBm)	SCS240
s-IntraSearchP	30	60 is actual value in dB (30 * 2 dB)	
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.n		SMTC.n
deriveSSB-IndexFromCell	false		Asynchronous cells
	true		Synchronous cells
}			
}			

Condition	Explanation
SMTC.n	SMTC pattern n according to TS 38.133 [6] A.3.11
Synchronous cells	SSB indices of neigibour cells can be derived from timing of serving cell
Asynchronous cells	SSB indices of neigibour cells cannot be derived from timing of serving cell

SIB3: for NR intra-frequency cell re-selection

Table H.2.1-2: *SIB3*: NR intra frequency cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.2-2			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB3 ::= SEQUENCE {			
intraFreqNeighCellList SEQUENCE (SIZE (1..maxCellIntra)) OF SEQUENCE {			
IntraFreqNeighCellInfo ::= SEQUENCE{			

physCellId	Set according to the neighbour cell PCI		
q-OffsetCell	dB0	0 is actual value in dB (0 * 2 dB)	
}			
}			
}			

SIB1: for NR intra frequency cell re-selection

Table H.2.1-3: *SIB1*: NR intra frequency cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-70	-140 is actual value in dBm (-70 * 2 dBm)	SCS15
	-69	-138 is actual value in dBm (-69 * 2 +1 dBm)	SCS30
	-69	-138 is actual value in dBm (-69 * 2 dBm)	SCS120
	-68	-136 is actual value in dBm (-68 * 2 dBm)	SCS240
}			
servingCellConfigCommon SEQUENCE {			
highSpeedConfig-r16 SEQUENCE {			
highSpeedMeasFlag-r16	true		HighSpeedMeas
}			
}			
}			

Condition	Explanation
HighSpeedMeas	highSpeedMeasFlag-r16 is configured. UE shall apply the enhanced measurement requirements to support high speed up to 500 km/h as specified in TS 38.133 [14]

H.2.2 System information blocks message contents exceptions for NR inter frequency cell re-selection

SIB2: for NR inter-frequency cell re-selection

Table H.2.2-1: *SIB2*: NR inter frequency cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionInfoCommon SEQUENCE {			
rangeToBestCell	Not present		
}			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	25	50 is actual value in dB (25 * 2 dB)	
threshServingLowP	22	44 is actual value in dB (22 * 2 dB)	
cellReselectionPriority	4		NR Cell 1
	5		NR Cell 2
}			

}			

SIB4: for NR inter-frequency cell re-selection

Table H.2.2-2: *SIB4*: NR inter frequency cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.2-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB4 ::= SEQUENCE {			
interFreqCarrierFreqList SEQUENCE (SIZE (1..maxFreq)) OF SEQUENCE {	1 Entry		
dl-CarrierFreq[1]	Downlink NR SSB ARFCN of NR Cell 2		NR Cell 1
	Downlink NR SSB ARFCN of NR Cell 1		NR Cell 2
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.n		SMTC.n
deriveSSB-IndexFromCell[1]	false		Asynchronous cells
	true		Synchronous cells
q-RxLevMin[1]	-70	-140 is actual value in dBm (-70 * 2 dBm)	dBm/15kHz
	-69	-137 is actual value in dBm (-69 * 2 +1 dBm)	dBm/30kHz
threshX-HighP[1]	24	48 is actual value in dB (24 * 2 dB)	
threshX-LowP[1]	25	50 is actual value in dB (25 * 2 dB)	
cellReselectionPriority[1]	5		NR Cell 1
	4		NR Cell 2
q-OffsetFreq[1]	dB0	0 is actual value in dB (0 * 2 dB).	
}			
}			

Condition	Explanation
SSB.n FRm	SSB pattern n in FRm according to TS 38.133 [6] A.3.10
Synchronous cells	SSB indices of neighbour cells can be derived from timing of serving cell
Asynchronous cells	SSB indices of neighbour cells cannot be derived from timing of serving cell

SIB1: for NR inter frequency cell re-selection

Table H.2.2-3: *SIB1*: NR inter frequency cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-70	-140 is actual value in dBm (-70 * 2 dBm)	dBm/15kHz
	-69	-137 is actual value in dBm (-69 * 2 +1 dBm)	dBm/30kHz
}			
}			

H.2.3 System information blocks message contents exceptions for NR inter-RAT cell re-selection

SIB1: for inter-RAT NR – E-UTRA cell re-selection

Table H.2.3-1: *SIB1*: Inter-RAT NR – E-UTRA cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.1-28			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB1 ::= SEQUENCE {			
cellSelectionInfo SEQUENCE {			
q-RxLevMin	-70	-140 is actual value in dBm (-70 * 2 dBm)	SCS15
	-69	-137 is actual value in dBm (-69 * 2 +1 dBm)	SCS30
}			
}			

SIB2: for inter-RAT NR – E-UTRA cell re-selection

Table H.2.3-2: *SIB2*: Inter-RAT NR – E-UTRA cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.2-1			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB2 ::= SEQUENCE {			
cellReselectionServingFreqInfo SEQUENCE {			
s-NonIntraSearchP	25	50 is actual value in dB (25 * 2 dB)	
threshServingLowP	22	44 is actual value in dB (22 * 2 dB)	
cellReselectionPriority	4		higher priority
	5		lower priority
}			
intraFreqCellReselectionInfo SEQUENCE {			
smtc	SSB-MTC specified in TS 38.508-1 [14] Table 7.3.1-3 with condition SMTC.n		SMTC.n
}			
}			

Condition	Explanation
SMTC.n	SMTC pattern n according to TS 38.133 [6] A.3.11
higher priority	NR cell re-selection to higher priority E-UTRA
lower priority	NR cell re-selection to lower priority E-UTRA

SIB5: for inter-RAT NR – E-UTRA cell re-selection

Table H.2.3-3: *SIB5*: Inter-RAT NR – E-UTRA cell re-selection

Derivation Path: TS 38.508-1 [14], Table 4.6.2-4			
Information Element	**Value/remark**	**Comment**	**Condition**
SIB5 ::= SEQUENCE {			
carrierFreqListEUTRA SEQUENCE (SIZE (1..maxEUTRA-Carrier)) OF SEQUENCE {	1 Entry		
carrierFreq[1]	Downlink EUTRA ARFCN of E-UTRA Cell 1		
eutra-FreqNeighCellList[1] SEQUENCE (SIZE (1..maxCellEUTRA)) OF SEQUENCE {			

physCellId	E-UTRA physical cell identity		
dummy	dB0		
}			
presenceAntennaPort1[1]	FALSE		
cellReselectionPriority[1]	5		higher priority
	4		lower priority
threshX-High	24	48 is actual value in dB (24 * 2 dB)	
threshX-Low	25	50 is actual value in dB (25 * 2 dB)	
q-RxLevMin	-70	-140 is actual value in dBm (-70 * 2 dBm)	
}			
}			

Condition	Explanation
higher priority	NR cell re-selection to higher priority E-UTRA
lower priority	NR cell re-selection to lower priority E-UTRA

H.3 RRC message content exceptions

H.3.1 RRC messages and information elements contents exceptions for NR measurement configuration

RRCReconfiguration

To setup NR Measurement Configuration.

Table H.3.1-1: *RRCReconfiguration*: NR measurement Configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition NR_MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
measConfig	MeasConfig-DEFAULT	Measurement configuration	
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
needForInterruptionConfigNR-r18	enabled		NFICN
	disabled		NNFICN
}			
}			
}			
}			
}			
}			
}			
}			
}			

Condition	Explanation
NFICN	UE shall report interruption requirement information of NR target bands in the *RRCReconfigurationComplete* and *RRCResumeComplete* message

NNFICN	UE shall not report interruption requirement information of NR target bands in the *RRCReconfigurationComplete* and *RRCResumeComplete* message

MeasConfig-DEFAULT

Configuration for NR measurement.

Table H.3.1-2: MeasConfig-DEFAULT: Configuration of NR measurement

Derivation path: TS 38.508-1 [14], Table 4.6.3-69			
Information Element	**Value/Remark**	**Comment**	**Condition**
measConfig ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	n entries	n=1 without condition n=2 for INTER-FREQ OR INTER-RAT OR Deactivated SCell	
measObjectId[1]	1		
measObject[1] CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with Condition INTRA-FREQ MO		
}			
measObjectId[2]	2		INTER-FREQ OR INTER-RAT OR Deactivated SCell
measObject[2] CHOICE {			
measObjectNR	MeasObjectNR-DEFAULT with Condition INTER-FREQ MO		INTER-FREQ
measObjectNR	MeasObjectNR-DEFAULT with Condition Deactivated SCell		Deactivated SCell
measObjectEUTRA	MeasObjectEUTRA-DEFAULT		INTER-RAT
}			
}			
reportConfigToAddModList SEQUENCE(SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		
reportConfigId[1]	ReportConfigId		
reportConfig[1] CHOICE {			
reportConfigNR	ReportConfigNR-DEFAULT		
	ReportConfigNR-DEFAULT		INTER-FREQ OR Deactivated SCell
reportConfigInterRAT	ReportConfigInterRAT-DEFAULT		INTER-RAT
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxNrofMeasId)) OF SEQUENCE {	1 entry		
measId[1]	MeasId		
measObjectId[1]	1		
	2		INTER-FREQ OR INTER-RAT OR

			Deactivated SCell
reportConfigId[1]	ReportConfigId		
}			
quantityConfig	QuantityConfig-DEFAULT		
	QuantityConfig	TS 38.508-1 Table 4.6.3-127	L3 FILTERING NEEDED
measGapConfig	MeasGapConfig-DEFAULT		GAP NEEDED
measGapSharingConfig	Not present		
interFrequencyConfig-NoGap-r16	Not present		
effectiveMeasWindowConfig-r18 CHOICE {			
setup	MeasWindowConfig-r18-DEFAULT		EMW_Setup
release	null		EMW_Release
}			
}			

Condition	Explanation
GAP NEEDED	Measurement gap on the NR Cell is needed for measurement
INTER-FREQ	Configuration for inter-frequency NR measurement tests
INTER-RAT	Configuration for inter-RAT EUTRA measurement tests
Deactivated SCell	Configuration for measurement on deactivated SCell tests
L3 FILTERING NEEDED	L3 filtering is needed for measurement
EMW_Setup	Setup effective measurement window in NR for E-UTRA measurements
EMW_Release	Release effective measurement window in NR for E-UTRA measurements

MeasObjectNR-DEFAULT

NR measurement object configuration.

Table H.3.1-3: MeasObjectNR-DEFAULT: NR intra-frequency measurement object configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-76			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR::= SEQUENCE {			
ssbFrequency	ARFCN-ValueNR of the SSB associated to serving cell	frequency of the serving cell	INTRA-FREQ MO
	ARFCN-ValueNR of the SSB associated to SCell		Deactivated SCell
	ARFCN-ValueNR of the SSB associated to inter-frequency neighbour cell		INTER-FREQ MO
refFreqCSI-RS	ARFCN-ValueNR with condition DL_PointA		CSI-RS MOBILITY
referenceSignalConfig SEQUENCE {			
ssb-ConfigMobility SEQUENCE {			
ssb-ToMeasure	Not present		
	SSB-ToMeasure specified in 38.508-1 [14] Table 7.3.1-31 with condition SSB.7 FR2 OR SSB.8 FR2		SSB.7 FR2 OR SSB.8 FR2
deriveSSB-IndexFromCell	false		
	true		Synchronous cells OR RLM
ssb-PositionQCL-Common-r16	n1		SSB.1 CCA SSB.2 CCA
	n2		SSB.3 CCA SSB.4 CCA
}			

csi-rs-ResourceConfigMobility CHOICE {			CSI-RS MOBILITY
setup	CSI-RS-ResourceConfigMobility-DEFAULT		
}			
}			
absThreshSS-BlocksConsolidation SEQUENCE {			
thresholdRSRP	0	SS-RSRP < -156dB	NOT SS-SINR
thresholdSINR	0	SS-SINR<-23	SS-SINR
}			
measCycleSCell-v1530	sf640		Deactivated SCell
rmtc-Config-r16 SEQUENCE {			RSSI
rmtc-Periodicity-r16	ms40		
measDurationSymbols-r16	sym14or12		
rmtc-SubframeOffset-r16	20		
ref-SCS-CP-r16	kHz15		
}			
associatedMeasGapSSB-r17	Not present		
	MeasGapId-r17		MGe
}			

Condition	Explanation
INTRA-FREQ MO	Configuration for NR MO associated to intra-frequency carrier
INTER-FREQ MO	Configuration for NR MO associated to inter-frequency carrier
Synchronous cells	SSB indices of neighbourcells can be derived from timing of serving cell
RLM	Configuration for RLM tests
Deactivated SCell	Configuration for SCell activation and deactivation tests
SS-SINR	Configuration for SS-SINR tests
MGe	Indicates measurement gap enhancements configuration
SSB.X CCA	SSB pattern SSB.X CCA configured as per section A.3A (X = {1,2,3,4})
RSSI	Configuration associated to RSSI or Channel Occupancy measurements
CSI-RS MOBILITY	Configuration for CSI-RS based measurement tests

MeasObjectEUTRA-DEFAULT

EUTRA measurement object configuration

Table H.3.1-3A: MeasObjectEUTRA-DEFAULT: InterRAT EUTRA measurement object configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-74			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectEUTRA ::= SEQUENCE {			
cellsToAddModListEUTRAN SEQUENCE (SIZE (1..maxCellMeasEUTRA)) OF SEQUENCE{			
cellIndexEUTRA	1		
physCellId	Physical Cell ID of the E-UTRA cell	Annex E	
cellIndividualOffset	dB0		
}			
eutra-PresenceAntennaPort1	false		
associatedMeasGap-r17	Not present		
	MeasGapId-r17		MGe
}			

Condition	Explanation
MGe	Indicates measurement gap enhancements configuration

CSI-RS-ResourceConfigMobility-DEFAULT

CSI-RS based measurement resource configuration

Table H.3.1-3B: *CSI-RS-ResourceConfigMobility-DEFAULT*

Derivation Path: TS 38.508-1 [14] Table 4.6.3-44			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-RS-ResourceConfigMobility ::= SEQUENCE {			
csi-RS-CellList-Mobility SEQUENCE (SIZE (1..maxNrofCSI-RS-CellsRRM)) OF CSI-RS-CellMobility {	2 entries		
CSI-RS-CellMobility[1] SEQUENCE {		Entry 1	
cellId	PhysCellId of NR SpCell		
csi-rs-MeasurementBW SEQUENCE {			
nrofPRBs	48		
startPRB	3		
}			
density	d3		
csi-rs-ResourceList-Mobility SEQUENCE (SIZE (1..maxNrofCSI-RS-ResourcesRRM)) OF CSI-RS-Resource-Mobility {	1 entry		
CSI-RS-Resource-Mobility[1] SEQUENCE {		Entry 1	
csi-RS-Index	0		
slotConfig CHOICE {			
ms20	1		
}			
associatedSSB SEQUENCE {			
ssb-Index	0		
isQuasiColocated	true		
}			
frequencyDomainAllocation CHOICE {			
row1	1111		
}			
firstOFDMSymbolInTimeDomain	10		
sequenceGenerationConfig	0		
}			
}			
CSI-RS-CellMobility[2] SEQUENCE {		Entry 2	
cellId	PhysCellId of NR neighbour cell		
csi-rs-MeasurementBW SEQUENCE {			
nrofPRBs	48		
startPRB	3		
}			
density	d3		
csi-rs-ResourceList-Mobility SEQUENCE (SIZE (1..maxNrofCSI-RS-ResourcesRRM)) OF CSI-RS-Resource-Mobility {	1 entry		
CSI-RS-Resource-Mobility[1] SEQUENCE {		Entry 1	
csi-RS-Index	0		
slotConfig CHOICE {			
ms20	1		
}			
associatedSSB SEQUENCE {			
ssb-Index	0		
isQuasiColocated	true		
}			
frequencyDomainAllocation CHOICE {			
row1	1111		
}			
firstOFDMSymbolInTimeDomain	10		
sequenceGenerationConfig	0		
}			
}			
}			
}			

ReportConfigNR-DEFAULT

NR Report Configuration

Table H.3.1-4: ReportConfigNR-DEFAULT(a3-offset): NR report configuration for event A3

Derivation Path: TS 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A3			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset CHOICE {			
rsrp	A3-offset*2	The actual value is field value * 0.5 dB	
rsrq	A3-offset*2	The actual value is field value * 0.5 dB	RSRQ
sinr	A3-offset*2	The actual value is field value * 0.5 dB	SINR
}			
hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
reportInterval	ms120		RSSI
reportQuantityRS-Indexes SEQUENCE {			SSB Index
rsrp	true		
rsrq	false		
	true		RSRQ
sinr	false		
	true		SINR
}			
maxReportCells	2		
maxNrofRS-IndexesToReport	2		SSB Index
measRSSI-ReportConfig-r16 SEQUENCE {			
channelOccupancyThreshold-r16	RSSI-Range-r16	Integer (0..76), actual value is field value -101 dBm	RSSI
}			
}			
}			
}			

Condition	Explanation
SSB Index	To include SSB Index
RSRQ	RSRQ trigger quantity
SINR	SINR trigger quantity
RSSI	RSSI or Channel Occupancy measurements

Table H.3.1-4AA: ReportConfigNR-DEFAULT(a4-threshold): NR report configuration for event A4

Derivation Path: 38.508-1 [14], Table 4.6.3-142 with condition EVENT_A4			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigNR ::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventA4 SEQUENCE {			
a4-Threshold CHOICE {			
rsrp	a4-threshold+156	For thresholds, the actual value is (IE value – 156) dBm	
}			
hysteresis	0		
timeToTrigger	ms0		

}			
}			
reportQuantityRS-Indexes SEQUENCE {			SSB Index
rsrp	true		
rsrq	false		
sinr	false		
}			
maxReportCells	2		
maxNrofRS-IndexesToReport	2		SSB Index
}			
}			
}			

Condition	Explanation
SSB Index	To include SSB Index

ReportConfigInterRAT-DEFAULT

InterRAT NR Report Configuration.

Table H.3.1-4A: ReportConfigInterRAT- DEFAULT (b2-Thres1, b2-Thres2): InterRAT NR report configuration for FR1 to E-UTRAN handover with b2-Threshold1 = b2-Thres1 and b2-Threshold2EUTRA = b2-Thres2 dBm

Derivation Path: TS 38.508-1 [4], Table 4.6.3-141			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT ::= SEQUENCE {			
reportType CHOICE {			
eventTriggered SEQUENCE {			
eventId CHOICE {			
eventB2 SEQUENCE {			
b2-Threshold1 CHOICE {			
rsrp	b2-Thres1	b2-Thres1 – 156 dBm	
}			
b2-Threshold2EUTRA CHOICE {			
rsrp	b2-Thres2	b2-Thres2 – 140 dBm	
}			
hysteresis	0	0 dB	
timeToTrigger	ms0		
}			
}			
reportQuantityCell SEQUENCE {			
rsrp	true		
rsrq	false		
sinr	false		
}			
}			
}			
}			

QuantityConfig-DEFAULT

NR quantity configuration when L3 filtering is not used.

Table H.3.1-5: QuantityConfig-DEFAULT: NR quantity configuration when L3 filtering is not used

Derivation Path: TS 38.508-1 [14], Table 4.6.3-127			
Information Element	**Value/remark**	**Comment**	**Condition**
QuantityConfig::= SEQUENCE {			
quantityConfigNR-List SEQUENCE (SIZE (1..maxNrofQuantityConfig)) OF SEQUENCE {	1 entry		
quantityConfigCell[1] SEQUENCE {			
ssb-FilterConfig SEQUENCE {			

filterCoefficientRSRP	fc0	No L3 filtering	
filterCoefficientRSRQ	fc0	No L3 filtering	
filterCoefficientRS-SINR	fc0	No L3 filtering	
}			
csi-RS-FilterConfig SEQUENCE {			
filterCoefficientRSRP	fc0	No L3 filtering	
filterCoefficientRSRQ	fc0	No L3 filtering	
filterCoefficientRS-SINR	fc0	No L3 filtering	
}			
}			
quantityConfigRS-Index	Not present		
quantityConfigRS-Index SEQUENCE {			SSB Index
ssb-FilterConfig SEQUENCE {			
filterCoefficientRSRP	fc0	No L3 filtering	
filterCoefficientRSRQ	fc0	No L3 filtering	
filterCoefficientRS-SINR	fc0	No L3 filtering	
}			
csi-RS-FilterConfig SEQUENCE {			
filterCoefficientRSRP	fc0	No L3 filtering	
filterCoefficientRSRQ	fc0	No L3 filtering	
filterCoefficientRS-SINR	fc0	No L3 filtering	
}			
}			
}			
quantityConfigEUTRA	Not present		
quantityConfigEUTRA SEQUENCE {			INTER-RAT
filterCoefficientRSRP	fc0		
filterCoefficientRSRQ	fc0		
filterCoefficientRS-SINR	fc0		

Condition	Explanation
INTER-RAT	Configuration for inter-RAT EUTRA measurement tests
SSB Index	SSB Index (RS Index) is reported

MeasGapConfig-DEFAULT

Measurement gap configuration.

Table H.3.1-6: MeasGapConfig: measurement gap configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.3-70			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= SEQUENCE {			
gapFR2 CHOICE {			gapFR2
setup SEQUENCE {			
gapOffset	39		Pattern #13
mgl	ms5dot5		Pattern #13
mgrp	ms40		Pattern #13
mgta	ms0		
}			
}			
gapFR1 CHOICE {			gapFR1
setup SEQUENCE {			
gapOffset	39		Pattern #2
	19		Pattern #4
mgl	ms3		Pattern #2
	ms6		Pattern #4
mgrp	ms40		Pattern #2
	ms20		Pattern #4
mgta	ms0		
}			
}			
gapUE CHOICE {			gapUE
setup SEQUENCE {			

gapOffset	39		Pattern #0 OR Pattern #2 OR Pattern #13
	0		RLM OR BFD
mgl	ms6		Pattern #0 OR RLM OR BFD
	ms3		Pattern #2 OR Pattern #3
	ms5dot5		Pattern #13
mgrp	ms40		Pattern #0 OR Pattern #2 OR Pattern #13 OR RLM OR BFD
	ms80		Pattern #3
mgta	ms0		
}			
}			
gapToAddModList-r17 SEQUENCE (SIZE (1..maxNrofGapId-r17)) OF GapConfig-r17 SEQUENCE{	1 entry		MGe
GapConfig-r17[1] SEQUENCE{			
measGapId-r17	1		Pattern #0
	2		Pattern #1 OR Pattern #13
	3		Pattern #24
gapType-r17	perUE		
gapOffset-r17	39		Pattern #0 OR Pattern #13
	19		Pattern #1
	11		Pattern #24
mgl-r17	ms6		Pattern #0 OR Pattern #1
	ms5dot5		Pattern #13
	ms10		Pattern #24
mgrp-r17	ms40		Pattern #0 OR Pattern #13
	ms80		Pattern #1 OR Pattern #24
mgta-r17	ms0		
refServCellIndicator-r17	Not present		
refFR2-ServCellAsyncCA-r17	Not present		
preConfigInd-r17	Not present		
	true		Pre-CFG
ncsgInd-r17	Not present		
	true		NCSG
gapAssociationPRS-r17	Not present		
	true		PRS
gapSharing-r17	Not present		
gapPriority-r17	2		
}			
}			
}			

Condition	Explanation
Pattern #0	Measurement gap pattern #0 defined in TS 38.133 [6] Table 9.1.2-1 is used for measurement tests
Pattern #1	Measurement gap pattern #1 defined in TS 38.133 [6] Table 9.1.2-1 is used for measurement tests
Pattern #2	Measurement gap pattern #2 defined in TS 38.133 [6] Table 9.1.2-1 is used for measurement tests
Pattern #3	Measurement gap pattern #3 defined in TS 38.133 [6] Table 9.1.2-1 is used for measurement tests
Pattern #4	Measurement gap pattern #4 defined in TS 38.133 [6] Table 9.1.2-1 is used for measurement tests
Pattern #13	Measurement gap pattern #13 defined in TS 38.133 [6] Table 9.1.2-1 is used for measurement tests
Pattern #24	Measurement gap pattern #24 defined in TS 38.133 [6] Table 9.1.2-1 is used for measurement tests
RLM	Measurement gap pattern for RLM tests
BFD	Measurement gap pattern for Beam Failure Dectection tests
gapFR2	Indicates measurement gap configuration that applies to FR2 only. gapFR2 cannot be configured together with gapUE. In (NG)EN-DC or NE-DC, gapFR2 can only be set up by NR RRC
gapFR1	Indicates measurement gap configuration that applies to FR1 only. gapFR1 cannot be configured together with gapUE. In (NG)EN-DC, gapFR1 cannot be set up by NR RRC

gapUE	Indicates measurement gap configuration that applies to all frequencies (FR1 and FR2). If gapUE is configured, then neither gapFR1 nor gapFR2 can be configured. In (NG)EN-DC, gapUE cannot be set up by NR RRC.
MGe	Indicates measurement gap enhancements configuration
Pre-CFG	Pre-configured measurement gap
NCSG	Measurement gap pattern for NCSG (network controlled small gap) tests
PRS	Measurement gap associated with PRS measurement

MeasResults-DEFAULT

measurement result for NR measurements.

Table H.3.1-7: MeasResults: measurement result for NR measurements

Derivation Path: TS 38.508-1 [14], Table 4.6.3-79 with condition A3			
Information Element	**Value/remark**	**Comment**	**Condition**
measResults SEQUENCE {			
measId	MeasId		
measResultServingMOList	Not Checked		CSI-RS MOBILITY
measResultServingMOList SEQUENCE (SIZE (1..maxNrofServingCells)) OF SEQUENCE {	2 entries		
servCellId[1]	ServCellIndex of NR SpCell		
measResultServingCell[1] SEQUENCE {			
physCellId	PhysCellId of NR SpCell		
measResult SEQUENCE {			
cellResults SEQUENCE {			
resultsSSB-Cell SEQUENCE {			
rsrp	(0..127)		
rsrq	(0..127)		
sinr	(0..127)		SINR
}			
}			
}			
}			
}			
servCellId[2]	ServCellIndex of NR SCell		Deactivated SCell
measResultServingCell[2] SEQUENCE {			Deactivated SCell
physCellId	PhysCellId of NR SCell		
measResult SEQUENCE {			
cellResults SEQUENCE {			
resultsSSB-Cell SEQUENCE {			
rsrp	(0..127)		
rsrq	(0..127)		
sinr	(0..127)		SINR
}			
}			
}			
}			
measResultNeighCells CHOICE {			
measResultListNR SEQUENCE (SIZE(1..maxCellReport)) OF SEQUENCE {	1 entry		INTRA-FREQ OR INTER-FREQ
physCellId[1]	PhysCellId of NR neighbour Cell		
measResult[1] SEQUENCE {			
cellResults SEQUENCE {			
resultsSSB-Cell SEQUENCE {			
rsrp	(0..127)		
rsrq	(0..127)		RSRQ

sinr	(0..127)		SINR
}			
resultsSSB-Cell	Not Checked		CSI-RS MOBILITY
resultsCSI-RS-Cell SEQUENCE {			CSI-RS MOBILITY
rsrp	(0..127)		
rsrq	(0..127)		RSRQ
sinr	(0..127)		SINR
}			
}			
rsIndexResults	Not Checked		CSI-RS MOBILITY
rsIndexResults SEQUENCE {	*n* entires of ResultsPerSSB-Index	*ResultsPerSSB-IndexList*	SSB Index
resultsPerSSB-Index SEQUENCE {	entry [1]		
ssb-Index	SSB-Index	an SS-Block within an SS-Burst	
}			
}			
}			
}			
measResultListEUTRA SEQUENCE (SIZE (1..maxCellReport)) OF SEQUENCE {	1 entry		INTER-RAT
eutra-PhysCellId [1]	PhysCellId of E-UTRA neighbour Cell		
measResult[1] SEQUENCE {			
rsrp	(0..97)		
rsrq	(0..34)		
}			
cgi-Info	Not present		
}			
}			
}			

Condition	Explanation
SSB Index	To include SSB Index
INTRA-FREQ	Configuration for intra-frequency NR measurement tests
INTER-FREQ	Configuration for inter-frequency NR measurement tests
INTER-RAT	Configuration for inter-RAT EUTRA measurement tests
Deactivated SCell	Configuration for measurement on Deactivated SCell tests
RSRQ	RSRQ measurement reporting
SINR	SINR measurement reporting
CSI-RS MOBILITY	Configuration for CSI-RS based measurement tests

RadioLinkMonitoringConfig -DEFAULT

Default configuration for RLM resources.

Table H.3.1-8: RadioLinkMonitoringConfig-DEFAULT: Default configuration for RLM and BFD resources

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF {	n entries	n = 1 for FR1, n = 2 for FR2 with 2SSB or second resource set of TRS, n = 1 otherwise	SSB RLM OR CSI-RS RLM
RadioLinkMonitoringRS[1] SEQUENCE {			
radioLinkMonitoringRS-Id	0		

purpose	rlf		
detectionResource CHOICE {			
ssb-Index	0	Index of SSB #0	SSB RLM
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4)	TS 38.508-1[14], table 7.3.1-7C	CSI-RS RLM
}			
}			
RadioLinkMonitoringRS[2] SEQUENCE {			FR2
radioLinkMonitoringRS-Id	1		
purpose	rlf		
detectionResource CHOICE {			
ssb-Index	1	Index of SSB #1	SSB RLM
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4) with condition SECOND_SET	TS 38.508-1[14], table 7.3.1-7C	CSI-RS RLM
}			
}			
}			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF {	2 entries		SSB BFD OR CSI-RS BFD
RadioLinkMonitoringRS[1] SEQUENCE {			
radioLinkMonitoringRS-Id	0		
purpose	both		
detectionResource CHOICE {			
ssb-Index	0	Index of SSB #0	SSB BFD
csi-RS-Index	NZP-CSI-RS-ResourceId for BM(0)	TS 38.508-1[14], Table 7.3.1-7E	CSI-RS BFD
}			
}			
RadioLinkMonitoringRS[2] SEQUENCE {			
radioLinkMonitoringRS-Id	1		
purpose	rlf		
detectionResource CHOICE {			
ssb-Index	1	Index of SSB #1	SSB BFD
csi-RS-Index	NZP-CSI-RS-ResourceId for BM(1)	TS 38.508-1[14], Table 7.3.1-7E	CSI-RS BFD
}			
}			
}			
beamFailureInstanceMaxCount	n1		SSB BFD OR CSI-RS BFD
beamFailureDetectionTimer	pbfd4		SSB BFD OR CSI-RS BFD
}			

Condition	Explanation
SSB RLM	Used when SSB based RLM is configured in test case
CSI-RS RLM	Used when CSI-RS based RLM is configured in test case
SSB BFD	Used when SSB based BFD is configured in test case
CSI-RS BFD	Used when CSI-RS based BFD is configured in test case
2SSB	For configuration with 2 SS Blocks

Table H.3.1-8A: RadioLinkMonitoringConfig-Release 17: Release 17 configuration for TRP specific RLM and BFD resources

Derivation Path: TS 38.508-1 [14], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
beamFailure-r17 ::= SEQUENCE {			
failureDetectionSet1-r17::= SEQUENCE {			

bfdResourcesToAddModList-r17 SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF BeamLinkMonitoringRS-r17 {	n entries	n = 1 for FR1, n = 2 for FR2	SSB RLM OR CSI-RS RLM
BeamLinkMonitoringRS-r17[1] ::= SEQUENCE {		entry 1	
beamLinkMonitoringRS-Id-r17	0		
detectionResource-r17 CHOICE {			
ssb-Index	0	Index of SSB #0	SSB RLM
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4)	TS 38.508-1[14], table 7.3.1-7C	CSI-RS RLM
}			
}			
BeamLinkMonitoringRS-r17[2] ::= SEQUENCE {		entry 2	
beamLinkMonitoringRS-Id-r17	1		
detectionResource-r17 CHOICE {			
ssb-Index	1	Index of SSB #1	SSB RLM
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4) with condition SECOND_SET	TS 38.508-1[14], table 7.3.1-7C	CSI-RS RLM
}			
}			
}			
bfdResourcesToReleaseList-r17 SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF BeamLinkMonitoringRS-Id-r17 {	2 entries		SSB BFD OR CSI-RS BFD
BeamLinkMonitoringRS-Id-r17[1]	0	entry 1	
BeamLinkMonitoringRS-Id-r17[2]	1	entry 2	
}			
beamFailureInstanceMaxCount-r17	n1		SSB BFD OR CSI-RS BFD
beamFailureDetectionTimer-r17	pbfd4		SSB BFD OR CSI-RS BFD
}			
failureDetectionSet2-r17::= SEQUENCE {			
bfdResourcesToAddModList-r17 SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF BeamLinkMonitoringRS-r17 {	n entries	n = 1 for FR1, n = 2 for FR2	SSB RLM OR CSI-RS RLM
BeamLinkMonitoringRS-r17[1] ::= SEQUENCE {		entry 1	
beamLinkMonitoringRS-Id-r17	2		
detectionResource-r17 CHOICE {			
ssb-Index	2	Index of SSB #2	SSB RLM
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4)	TS 38.508-1[14], table 7.3.1-7C	CSI-RS RLM
}			
}			
BeamLinkMonitoringRS-r17[2] ::= SEQUENCE {		entry 2	
beamLinkMonitoringRS-Id-r17	3		
detectionResource-r17 CHOICE {			
ssb-Index	3	Index of SSB #3	SSB RLM
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4) with condition SECOND_SET	TS 38.508-1[14], table 7.3.1-7C	CSI-RS RLM
}			
}			
}			
bfdResourcesToReleaseList-r17 SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OBeamLinkMonitoringRS-Id-r17 F {	2 entries		SSB BFD OR CSI-RS BFD
BeamLinkMonitoringRS-Id-r17[1]	2	entry 1	
BeamLinkMonitoringRS-Id-r17[2]	3	entry 2	
}			
beamFailureInstanceMaxCount-r17	n1		SSB BFD OR CSI-RS BFD
beamFailureDetectionTimer-r17	pbfd4		SSB BFD OR CSI-RS BFD

}			
additionalPCI-r17	not present		
}			
}			

Condition	Explanation
SSB RLM	Used when SSB based RLM is configured in test case
CSI-RS RLM	Used when CSI-RS based RLM is configured in test case
SSB BFD	Used when SSB based BFD is configured in test case
CSI-RS BFD	Used when CSI-RS based BFD is configured in test case

RLF-TimersAndConstants-DEFAULT

Default parameters for RLM related timers and counters.

Table H.3.1-9: RLF-TimersAndConstants-DEFAULT

Derivation Path: TS 38.508-1 [14], Table 4.6.3-150			
Information Element	**Value/remark**	**Comment**	**Condition**
RLF-TimersAndConstants ::= SEQUENCE {			
t310	ms0		
}			

BeamFailureRecoveryConfig-DEFAULT

Default configuration for CBD and contention-free RACH in link recovery.

Table H.3.1-10: BeamFailureRecoveryConfig-DEFAULT

Derivation Path: TS 38.508-1 [14], Table 4.6.3-6			
Information Element	**Value/remark**	**Comment**	**Condition**
BeamFailureRecoveryConfig ::= SEQUENCE {			
rootSequenceIndex-BFR	0		
rach-ConfigBFR	RACH-ConfigGeneric specified in 38.508-1 [14] Table 7.3.1-14		SSB
	RACH-ConfigGeneric specified in 38.508-1 [14] Table 7.3.1-14 with condition PRACH.4 FR1		CSI-RS and FR1
	RACH-ConfigGeneric specified in 38.508-1 [14] Table 7.3.1-14 with condition PRACH.4 FR2		CSI-RS and FR1
rsrp-ThresholdSSB	58	Actual value is 58 - 156 = -98 dBm	SCS15
	61	Actual value is 61 - 156 = -95 dBm	SCS30
	47	Actual value is 47 - 156 = -109 dBm	SCS120
	50	Actual value is 50 - 156 = -106 dBm	SCS240
candidateBeamRSList SEQUENCE (SIZE(1..maxNrofCandidateBeams)) OF CHOICE {	1 entry		
ssb[1] SEQUENCE {			SSB
ssb	1		
ra-PreambleIndex	40		
}			
csi-RS[1] SEQUENCE {			CSI-RS
csi-RS	NZP-CSI-RS-ResourceId of the CSI-RS resource used for CBD		
ra-OccasionList	1		
ra-PreambleIndex	40		

}			
}			
ssb-perRACH-Occasion	oneFourth		
ra-ssb-OccasionMaskIndex	Not present		
	1		PRACH.2 FR1 OR PRACH.2 FR2
recoverySearchSpaceId	SearchSpaceId of the search space used for BFD RAR in DL active BWP		
ra-Prioritization	Not present		
beamFailureRecoveryTimer	Not present		
}			

Condition	Explanation
SSB	Configuration for SSB based CBD
CSI-RS	Configuration for CSI-RS based CBD

BWP-UplinkDedicated

Default BWP configuration for Beam Failure Recovery

Table H.3.1-10A: *BWP-UplinkDedicated*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-15			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-UplinkDedicated ::= SEQUENCE {			
beamFailureRecoveryConfig	BeamFailureRecoveryConfig-DEFAULT		
}			

RACH-ConfigCommon

Default RACH configuration for Beam Failure Recovery

Table H.3.1-10B: *RACH-ConfigCommon*

Derivation Path: TS 38.508-1 [14] Table 7.3.1-13			
Information Element	**Value/remark**	**Comment**	**Condition**
RACH-ConfigCommon::= SEQUENCE {			
ssb-perRACH-OccasionAndCB-PreamblesPerSSB CHOICE {			
oneFourth	n40		
}			
}			

Table H.3.1-11: Void

BeamFailureRecoverySCellConfig-DEFAULT

Default configuration for CBD and contention-free RACH in link recovery.

Table H.3.1-12: BeamFailureRecoverySCellConfig-DEFAULT

Derivation Path: TS 38.508-1 [14], Table 4.6.3-6AA			
Information Element	**Value/remark**	**Comment**	**Condition**
BeamFailureRecoveryRSConfig-r16 ::= SEQUENCE {			

rsrp-ThresholdBFR-r16	58	-98dBm	SCS15
	61	-95dBm	SCS30
	47	-109dBm	SCS120
candidateBeamRS-List-r16 SEQUENCE (SIZE(1..maxNrofCandidateBeams-r16)) OF CandidateBeamRS-r16 {	1 entry		
CandidateBeamRS-r16[1] SEQUENCE {		entry 1	
candidateBeamConfig-r16 CHOICE {			
ssb-r16	1		SSB
csi-RS-r16	NZP-CSI-RS-ResourceId of the CSI-RS resource used for CBD		CSI-RS
}			
servingCellId	ServCellIndex of the SCell		
}			
}			
}			

Table H.3.1-12A: BeamFailureRecoverySpCellConfig-DEFAULT

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
BeamFailureRecoveryRSConfig-r16 ::= SEQUENCE {			
rsrp-ThresholdBFR-r16	58	-98dBm	SCS15
	61	-95dBm	SCS30
	47	-109dBm	SCS120
candidateBeamRS-List2-r17 SEQUENCE (SIZE(1..maxNrofCandidateBeams-r16)) OF CandidateBeamRS-r16 {	1 entry		
CandidateBeamRS-r16[1] SEQUENCE {		entry 1	
candidateBeamConfig-r16 CHOICE {			
ssb-r16	1		SSB
csi-RS-r16	NZP-CSI-RS-ResourceId of the CSI-RS resource used for CBD		CSI-RS
}			
servingCellId	ServCellIndex of the SpCell		
}			
}			
}			

BWP-DownlinkDedicated

Table H.3.1-13: *BWP-DownlinkDedicated*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-11			
Information Element	**Value/remark**	**Comment**	**Condition**
BWP-DownlinkDedicated ::= SEQUENCE {			
beamFailureRecoverySCellConfig-r16 CHOICE {			
setup	BeamFailureRecoverySCellConfig-DEFAULT		SCell
}			
}			
beamFailureRecoverySpCellConfig-r17 CHOICE {			
setup	BeamFailureRecoverySpCellConfig-DEFAULT		SpCell
}			
}			

MeasWindowConfig-DEFAULT

Table H.3.1-14: *MeasWindowConfig-DEFAULT*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-80C			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasWindowConfig-r18 ::= SEQUENCE {			
windowOffsetPeriodicity CHOICE {			
periodicityMs40	0		MS40
periodicityMs80	0		MS80
}			
windowDuration	ms5		
}			

Condition	Explanation
MS40	40 ms for measurement window periodicity
MS80	80 ms for measurement window periodicity

NeedForInterruptionNR

Table H.3.1-15: *NeedForInterruptionNR*

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
NeedForInterruptionNR-r18 ::= SEQUENCE {			
interruptionIndication-r18	no-gap-with-interruption		NGWI
	no-gap-no-interruption		NGNI
}			

Condition	Explanation
NGWI	interruption is needed to perform SSB based measurements without measurement gap
NGNI	interruption is not needed to perform SSB based measurements without measurement gap

H.3.2 RRC messages and information elements contents exceptions for handover

Table H.3.2-1: *Void*

Table H.3.2-2: RRCReconfiguration-HO

Derivation Path: TS 38.508-1, Table 4.8.1-1A			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
radioBearerConfig	RadioBearerConfig with conditions SRB_NR_PDCP and DRBn and Re-establish_PDCP		RBConfig_KeyChange
	RadioBearerConfig with conditions DRBn and Recover_PDCP		RBConfig_NoKeyChange
secondaryCellGroup	Not present		
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig	Table H.3.2-3	
}			
}			
}			

}			

Condition	Explanation
RBConfig_KeyChange	RadioBearerConfig to perform Intra-NR handover with security key change
RBConfig _NoKeyChange	RadioBearerConfig to perform Intra-NR handover without security key change

Table H.3.2-3: CellGroupConfig

Derivation Path: TS 38.508-1 [14] Table 4.6.3-19 with condition PCell_change			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
reconfigurationWithSync SEQUENCE {			
smtc	SMTC specified in 38.508-1 [14] Table 7.3.1-3 with condition SMTC.n	SMTC.n is the SMTC reference configuration used in test case	
}			
}			

H.3.3 RRC messages and information elements contents exceptions for NR inter-RAT handover

MobilityFromNRCommand

For Inter-RAT NR handover.

Table H.3.3-1: *MobilityFromNRCommand*: InterRAT NR handover

Derivation Path: TS 38.508-1 [14], Table 4.6.1-8			
Information Element	**Value/remark**	**Comment**	**Condition**
MobilityFromNRCommand::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-TransactionIdentifier		
criticalExtensions CHOICE {			
mobilityFromNRCommand SEQUENCE {			
targetRAT-Type	eutra		
targetRAT-MessageContainer	OCTET STRING including the RRCConnectionReconfiguration message according TS 36.508 [2], table 4.6.1-8 with condition HO-TO-EUTRA		
nas-SecurityParamFromNR	The 4 LSB of the downlink NAS COUNT		
lateNonCriticalExtension	Not present		
nonCriticalExtension SEQUENCE {}	Not present		
}			
}			
}			

MobilityFromEUTRACommand

Table H.3.3-2: *MobilityFromEUTRACommand*: inter-RAT handover to NR Cell

Derivation Path:TS 36.508 [25] Table 4.6.1-6			
Information Element	**Value/remark**	**Comment**	**Condition**
MobilityFromEUTRACommand ::= SEQUENCE {			
criticalExtensions CHOICE {			

c1 CHOICE {			
mobilityFromEUTRACommand-r9 SEQUENCE {			
purpose CHOICE {			
handover SEQUENCE {			
targetRAT-Type	nr		
targetRAT-MessageContainer	OCTET STRING containing RRCReconfiguration according to TS 38.508-1 [14] with Condition NR		
nas-SecurityParamFromEUTRA	Not present		
systemInformation	Not present		
}			
}			
}			
}			
}			
}			

H.3.4 E-UTRA RRC messages and information elements contents exceptions

RRCConnectionReconfiguration

Includes the nr-SecondaryCellGroupConfig-r15 to convey NR *RRCReconfiguration* message as specified in TS 38.331 [13].

Table H.3.4-1: RRCConnectionReconfiguration: NR RRC Reconfiguration in EN-DC

Derivation Path: 36.508 [25], Table 4.6.1-8 with condition MCG_and_SCG			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
c1 CHOICE{			
rrcConnectionReconfiguration-r8 ::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
setup SEQUENCE {			
nr-SecondaryCellGroupConfig-r15	*RRCReconfiguration*		
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			

Table H.3.4-1a: RRCConnectionReconfiguration for measurement configuration

For measurement configuration provided by NR PSCell under EN-DC.

Derivation Path: 36.508 [25], Table 4.6.1-8 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
c1 CHOICE{			
rrcConnectionReconfiguration-r8 ::= SEQUENCE {			
measConfig	Not present		
	MeasConfig-DEFAULT	Table H.3.4-4	GAP_NEEDED
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
nonCriticalExtensions::= SEQUENCE {			
setup SEQUENCE {			
nr-SecondaryCellGroupConfig-r15	*RRCReconfiguration*	Table H.3.1-1	
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			
}			

Condition	Explanation
GAP_NEEDED	Measurement gap is needed in Test

ULInformationTransferMRDC

uplink transfer of MR DC information for transferring the NR RRC Measurement Report message in EN-DC.

Table H.3.4-2: ULInformationTransferMRDC: uplink transfer of MR DC information

Derivation Path: 36.508 [25], Table 4.6.1-27			
Information Element	**Value/remark**	**Comment**	**Condition**
ULInformationTransferMRDC ::= SEQUENCE {			
ul-DCCH-MessageNR-r15	OCTET STRING including the MeasurementReport		
}			

RRCConnectionReconfigurationComplete

Includes the scg-ConfigResponseNR to convey NR *RRCReconfigurationComplete* message as specified in TS 38.331 [13].

Table H.3.4-3: *RRCConnectionReconfigurationComplete*: NR RRC Reconfiguration Complete in EN-DC

Derivation Path: 36.508 [25], Table 4.6.1-9: with condition MCG_and_SCG			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfigurationComplete ::= SEQUENCE {			
rrc-TransactionIdentifier	RRC-TransactionIdentifier-UL		

criticalExtensions CHOICE {			
rrcConnectionReconfigurationComplete-r8 SEQUENCE {			
nonCriticalExtension SEQUENCE {			
scg-ConfigResponseNR-r15	OCTET STRING including the RRCReconfigurationComplete message according TS 38.508-1, table 4.6.1-14.		
}			
}			
}			
}			

MeasConfig-DEFAULT

Configures measurement gap that applies to FR1 only in EN-DC as specified in TS 38.331 [13].

Table H.3.4-4: MeasConfig-DEFAULT

Derivation Path: 36.508 [25],Table 4.6.6-1			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasConfig-DEFAULT ::= SEQUENCE {			
measObjectToAddModList SEQUENCE (SIZE (1..maxObjectId)) OF SEQUENCE {	1 entry		
measObjectId[1]	1		
measObject[1] CHOICE {			
measObjectEUTRA	MeasObjectEUTRA-GENERIC(Freq)	Freq is the frequency of E-UTRA PCell	
}			
}			
measObjectToAddModList SEQUENCE (SIZE (1..maxObjectId)) OF SEQUENCE {	2 entries		INTER-RAT NR
measObjectId[1]	1		
measObject[1] CHOICE {			
measObjectEUTRA	MeasObjectEUTRA-GENERIC(Freq)	Freq is the frequency of E-UTRA PCell	
}			
measObjectId[2]	2		
measObject[2] CHOICE {			
measObjectNR-r15	MeasObjectNR	Table H.3.4-6	
}			
}			
measObjectToAddModList SEQUENCE (SIZE (1..maxObjectId)) OF SEQUENCE {	3 entries		E-UTRA_Deactivated_SCell
measObjectId[1]	1		
measObject[1] CHOICE {			
measObjectEUTRA	MeasObjectEUTRA-GENERIC(Freq)	Freq is the frequency of E-UTRA PCell Table H.3.4-9	
}			
measObjectId[2]	2		
measObject[2] CHOICE {			
measObjectEUTRA	MeasObjectEUTRA-GENERIC(Freq)	Freq is the frequency of E-UTRA SCell Table H.3.4-9	E-UTRA_Deactivated_SCell
}			
measObjectId[3]	3		
measObject[3] CHOICE {			

measObjectNR-r15	MeasObjectNR	Table H.3.4-6	
}			
}			
reportConfigToAddModList SEQUENCE (SIZE (1..maxReportConfigId)) OF SEQUENCE {	1 entry		INTER-RAT NR OR E-UTRAN_Deactivated_SCell
reportConfigId[1]	1		
reportConfig[1] CHOICE {			
reportConfigEUTRA	ReportConfigEUTRA-A4(Thres)	Set Thres according to test parameters specified in test cases	EVENT A4
	ReportConfigEUTRA-A3(A3-offset)	Table H.3.4-10	E-UTRA_Deactivated_SCell
reportConfigInterRAT	ReportConfigInterRAT-B2-NR(EUTRA-Thres, NR-Thres)	Set EUTRA-Thres and NR-Thres according to test parameters specified in test cases	EVENT B2
	ReportConfigInterRAT-B1-NR(EUTRA-Thres, NR-Thres)	Set EUTRA-Thres and NR-Thres according to test parameters specified in test cases	EVENT B1
	ReportConfigInterRAT-SFTD with Condition INTER-RAT	TS 36.508 [25] Table 4.6.6-8B	SFTD
	ReportConfigInterRAT-PERIODICAL	Table 4.6.6-9 in TS 36.508 [25]	PERIODICAL
}			
}			
measIdToAddModList SEQUENCE (SIZE (1..maxMeasId)) OF SEQUENCE {	1 entry		INTER-RAT NR OR E-UTRA_Deactivated_SCell
measId[1]	1		
measObjectId[1]	2		
reportConfigId[1]	1		
}			
measGapConfig	MeasGapConfig-FR1	Table H.3.4-5	
	Not present		GAPLESS
fr1-Gap-r15	false		gapUE
	true		gapFR1
	Not present		E-UTRA_Deactivated_SCell
quantityConfig	QuantityConfig-DEFAULT	Table H.3.4-11	E-UTRA_Deactivated_SCell
}			

Condition	Explanation
gapUE	fr1-Gap-r15 set to false indicates the gap is applicable for measurements on FR1 and FR2. E-UTRAN includes this field only when the UE is configured with (NG)EN-DC.

gapFR1	fr1-Gap-r15 set to true indicates the gap is only applicable for measurements on FR1. E-UTRAN includes this field only when the UE is configured with (NG)EN-DC.
INTER-RAT NR	Measurement configuration for inter-RAT NR measurements
EVENT B2	For event B2 triggered measurement reporting test cases
EVENT B1	For event B1 triggered measurement reporting test cases
EVENT A4	For event A4 triggered measurement reporting
SFTD	For inter-RAT SFTD measurement test cases
GAPLESS	MG is not needed in test
PERIODICAL	For periodic measurement reporting test cases
E-UTRA_Deactivated_SCell	For test cases with an LTE deactivated SCell

MeasGapConfig

Configures measurement gap by LTE RRC in EN-DC as specified in TS 38.331 [13].

Table H.3.4-5: MeasGapConfig

Derivation Path: 36.508 [25],Table 4.6.6-1A			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasGapConfig ::= CHOICE {			
setup SEQUENCE {			
gapOffset CHOICE {			
gp0	39	TGRP = 40 ms	Pattern #0
	0		BFD
gp4-r15	19	TGRP = 20 ms	Pattern #4
}			
}			
}			

Condition	**Explanation**
Pattern #0	*gp0* corresponds to gap offset of Gap Pattern Id "0" with MGRP = 40ms
Pattern #4	*gp4-r15* corresponds to gap offset of Gap Pattern Id "4" with MGRP = 40ms (see TS 38.133, Table 9.1.2-1). It can be applied for (NG)EN-DC, see TS 38.133, Table 9.1.2-2.
BFD	Measurement gap pattern for Beam Failure Dectection tests

Table H.3.4-6: MeasObjectNR

Derivation Path: TS 36.508 [25] Table 4.6.6-2B			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectNR-GENERIC(Freq) ::= SEQUENCE {			
rs-ConfigSSB-r15 ::= SEQUENCE {			
measTimingConfig-r15 ::= SEQUENCE {			
periodicityAndOffset-r15 CHOICE {			
sf20-r15	0		SMTC.1 or SMTC.2
	10		SMTC.4 or SMTC.5
	17		SMTC.6
sf160-r15	0		SMTC.3
}			
ssb-Duration-r15	sf1		SMTC.1, SMTC.3 or SMTC.4
	sf5		SMTC.2, SMTC.5 or SMTC.6
}			
subcarrierSpacingSSB-r15	kHz15		SSB.1 FR1, SSB.3 FR1 or SSB.5 FR1
	kHz30		SSB.2 FR1, SSB.4 FR1 or SSB.6 FR1
	kHz120		SSB.1 FR2, SSB.3 FR2, SSB.5 FR2 or SSB.7 FR2

	KHz240		SSB.2 FR2, SSB.4 FR2, SSB.6 FR2 or SSB.8 FR2
}			
deriveSSB-IndexFromCell-r15	Not present		
	true		Synchronous cells
	false		Asynchronous cells
}			

Table H.3.4-7: RRCConnectionReconfiguration for iRAT measurement configuration

Derivation Path: 36.508 [25], Table 4.6.1-8 with condition MEAS			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCConnectionReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
c1 CHOICE{			
rrcConnectionReconfiguration-r8 ::= SEQUENCE {			
measConfig	MeasConfig-DEFAULT with Conditions INTER RAT NR and PERIODICAL	Table H.3.4-4	
	MeasConfig-DEFAULT with Conditions INTER RAT NR and SFTD	Table H.3.4-4	INTER-RAT and SFTD
	MeasConfig-DEFAULT with Conditions INTER RAT NR and EVENT B2	Table H.3.4-4	INTER-RAT and EVENT B2
	MeasConfig-DEFAULT with Conditions INTER RAT NR and EVENT B1	Table H.3.4-4	INTER-RAT and EVENT B1
}			
}			
}			
}			

Table H.3.4-8: ReportConfigInterRAT-B2-NR(EUTRA-Thres, NR-Thres)

Derivation Path: 36.508 [25], Table 4.6.6-8A			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigInterRAT-B2-NR ::= SEQUENCE {			
maxReportRS-Index-r15	2		SSB-Index
reportQuantityRS-IndexNR-r15 SEQUENCE {			SSB-Index
ss-rsrp	TRUE		
ss-rsrq	FALSE		
ss-sinr	FALSE		
}			
reportRS-IndexResultsNR	TRUE		SSB-Index
}			

Condition	Explanation
SSB-Index	To include SSB Index

Table H.3.4-9: MeasObjectEUTRA-GENERIC(Freq)

Derivation Path: 36.508 [25],Table 7.3.3-1			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasObjectEUTRA-GENERIC(Freq) ::= SEQUENCE {			

measCycleSCell-r10	sf640		E-UTRA_Deactivated_SCell
}			

Table H.3.4-10: ReportConfigEUTRA-A3(a3-offset)

Derivation Path: 36.508 [25],Table 4.6.6-6			
Information Element	**Value/remark**	**Comment**	**Condition**
ReportConfigEUTRA-A3 ::= SEQUENCE {			
triggerType CHOICE {			
event SEQUENCE {			
eventId CHOICE {			
eventA3 SEQUENCE {			
a3-Offset	A3-offset *2	The actual value is field value * 0.5 dB	
}			
}			
timeToTrigger	ms0		
}			
}			
reportQuantity	sameAsTriggerQUantity		
maxReportCells	2		
reportInterval	ms480		
reportAmount	r2		
}			

Table H.3.4-11: QuantityConfig-DEFAULT

Derivation Path: 36.508 [25],Table 4.6.6-3A			
Information Element	**Value/remark**	**Comment**	**Condition**
QuantityConfig-DEFAULT ::= SEQUENCE {			
quantityConfigEUTRA SEQUENCE {			
filterCoefficientRSRP	fc0		
filterCoefficientRSRQ	fc0		
}			
quantityConfigNRList-r15 (SIZE (1..maxQuantSetsNR-r15)) OF SEQUENCE {	1 entries		
measQuantityCellNR-r15[1] SEQUENCE {			
filterCoeff-RSRP-r15	fc0		
filterCoeff-RSRQ-r15	fc0		
filterCoefficient-SINR-r13	fc0		
}			
}			
}			

H.3.5 RRC messages and information elements contents exceptions for NR radio link monitoring (RLM)

CSI-RS information elements contents exception for NR RLM SSB-Based test cases

Table H.3.5-1 to H.3.5-3: Void

Table H.3.5-4: CSI-ReportConfig

Derivation Path: TS 38.508[14] Table 7.3.1-12F			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ReportConfig ::= SEQUENCE {			
reportConfigType CHOICE {			
periodic SEQUENCE {			
reportSlotConfig ::= CHOICE {			
slots5	0		SCS15kHz_FDD
slots5	2		SCS15kHz_TDD
slots10	4		SCS30kHz
slots40	16		SCS120kHz
}			
pucch-CSI-ResourceList SEQUENCE (SIZE (1..maxNrofBWPs)) OF{			
PUCCH_CSI_Resource[0] SEQUENCE {			
uplinkBandwidthPartId	BWP-Id		
pucch_Resource	9		
}			
}			
}			
}			
}			

Table H.3.5-5 to H.3.5-7: Void

BWP-DownlinkDedicated: to setup radioLinkMonitoringConfig Configuration

Table H.3.5-8: Void

RadioLinkMonitoringConfig: Configuration for RLM RS

Table H.3.5-9: *RadioLinkMonitoringConfig*

Derivation Path: TS 38.508-1 [4], Table 4.6.3-133			
Information Element	**Value/remark**	**Comment**	**Condition**
RadioLinkMonitoringConfig ::= SEQUENCE {			
failureDetectionResourcesToAddModList SEQUENCE (SIZE(1..maxNrofFailureDetectionResources)) OF SEQUENCE {	n entries	n = 1 for FR1, n = 2 for FR2	
radioLinkMonitoringRS-Id[1]	0		
purpose[1]	rlf		
detectionResource[1] CHOICE {			
ssb-Index	0	Index of SSB #0	SSB RLM
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4)	TS 38.508-1[14], table 7.3.1-7C	CSI-RS RLM
}			
RadioLinkMonitoringRS[2] SEQUENCE {			FR2
radioLinkMonitoringRS-Id	1		
purpose	rlf		
detectionResource CHOICE {			
ssb-Index	1	Index of SSB #1	SSB RLM

csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4) with condition SECOND_SET	TS 38.508-1[14], table 7.3.1-7C	CSI-RS RLM
}			
failureDetectionResourcesToReleaseList	Not present		
beamFailureInstanceMaxCount	Not present		
beamFailureDetectionTimer	Not present		
}			

Condition	Explanation
SSB RLM	Configuration for SSB based RLM test cases
CSI-RS RLM	Configuration for CSI-RS based RLM test cases

Table H.3.5-10: Void

H.3.6 RRC messages and IE content exceptions for L1-RSRP measurement for beam reporting

ServingCellConfig: Default generic configuration for enabling CSI measurements and reporting

Table H.3.6-1: Void

CSI-ReportConfig: Default generic configuration for L1-RSRP measurements

Table H.3.6-2: CSI-ReportConfig

Derivation Path: TS 38.508-1 [14], Table 7.3.1-12G			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ReportConfig ::= SEQUENCE {			
csi-IM-ResourcesForInterference	Not present		
nzp-CSI-RS-ResourcesForInterference	Not present		
reportConfigType CHOICE {			
periodic SEQUENCE {			PERIODIC
reportSlotConfig CHOICE {			
slot80	7	Periodicity 80 slots and offset 7	SCS30
	2	Periodicity 80 slots and offset 2	SCS15
slot320	4	Periodicity 320 slots and offset 4	FR2
pucch-CSI-ResourceList SEQUENCE {	1 entry		
(SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
uplinkBandwidthPartId	BWP-Id of active BWP		
pucch-Resource	8	PUCCH-format2 as configured in TS 38.508-1 [14], Table 4.6.3-112	
}			
}			
}			
}			
reportQuantity CHOICE {			
ssb-Index-RSRP	NULL		SS-RSRP
cri-RSRP	NULL		CSI-RSRP
}			
timeRestrictionForChannelMeasurements	configured		
groupBasedBeamReporting CHOICE {			
disabled SEQUENCE {			
nrofReportedRS	n2		

}			
}			
}			

Condition	Explanation
PERIODIC	Configuration for periodic reporting
SS-RSRP	L1-RSRP measurement based on SSB
CSI-RSRP	L1-RSRP measurement based on CSI-RS

CSI-ResourceConfig: Default generic resource configuration for L1-RSRP measurements

Table H.3.6-3: CSI-ResourceConfig

Derivation Path: TS 38.508-1 [14], Table 7.3.1-12B			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ResourceConfig ::= SEQUENCE {			
csi-RS-ResourceSetList CHOICE {			
nzp-CSI-RS-SSB SEQUENCE {			
nzp-CSI-RS-ResourceSetList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourceSetsPerConfig)) OF {	1 entry		CSI-RS
NZP-CSI-RS-ResourceSetId[0]	0		
}			
csi-SSB-ResourceSetList SEQUENCE (SIZE (1..maxNrofCSI-SSB-ResourceSetsPerConfig)) OF {	1 entry		SSB
CSI-SSB-ResourceSetId[0]	0		
}			
}			
}			
}			

Condition	Explanation
SSB	Configuration for SSB based CSI
CSI-RS	Configuration for CSI-RS based CSI

Table H.3.6-4 to H.3.6-9: Void

CSI-MeasConfig: Default generic resource configuration for L1-RSRP measurements

Table H.3.6-10: CSI-MeasConfig

Derivation Path: TS 38.508-1 [14], Table 7.3.1-6			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-MeasConfig::= SEQUENCE {			
csi-SSB-ResourceSetToAddModList SEQUENCE (SIZE (1..maxNrofCSI-SSB-ResourceSets)) OF CSI-SSB-ResourceSet {			
CSI-SSB-ResourceSet[1]	CSI-SSB-ResourceSet-RRM	TS 38.508-1 Table 7.3.1-29	
}			
}			

H.3.6A RRC messages and IE content exceptions for L1-SINR measurement for beam reporting

ServingCellConfig: Default generic configuration for enabling CSI measurements and reporting.

CSI-ReportConfig: Default generic configuration for L1-SINR measurements.

Table H.3.6A-1: CSI-ReportConfig

Derivation Path: TS 38.508-1 [14], Table 7.3.1-12G			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ReportConfig ::= SEQUENCE {			
csi-IM-ResourcesForInterference	CSI-IM-ResourceConfigId-IMR		CSI-IM_IMR
	CSI-IM-ResourceConfigId-IMR with condition APERIODIC		CSI-IM_IMR AND APERIODIC
nzp-CSI-RS-ResourcesForInterference	CSI-ResourceConfigId-IMR		CSI-RS_IMR
	CSI-ResourceConfigId-IMR with condition APERIODIC		CSI-RS_IMR AND APERIODIC
reportConfigType CHOICE {			
periodic SEQUENCE {			PERIODIC
reportSlotConfig CHOICE {			
slot80	7	Periodicity 80 slots and offset 7	SCS30
	2	Periodicity 80 slots and offset 2	SCS15
	4	Periodicity 80 slots and offset 4	FR2
pucch-CSI-ResourceList SEQUENCE {	1 entry		
(SIZE (1..maxNrofBWPs)) OF SEQUENCE {			
uplinkBandwidthPartId	BWP-Id of active BWP		
pucch-Resource	8	PUCCH-format2 as configured in TS 38.508-1 [14], Table 4.6.3-112	
}			
}			
}			
}			
aperiodic SEQUENCE {			APERIODIC
reportSlotOffsetList SEQUENCE (SIZE (1..maxNrofUL-Allocations)) OF {	1 entry		
INTEGER[1]	26		
}			
}			
}			
timeRestrictionForChannelMeasurements	configured		
groupBasedBeamReporting CHOICE {			
disabled SEQUENCE {			
nrofReportedRS	n2		
}			
}			
reportQuantity-r16 CHOICE {			
cri-SINR-r16	NULL		CSI-SINR
ssb-Index- SINR-r16	NULL		SS-SINR
}			
}			

Condition	Explanation

PERIODIC	Configuration for periodic reporting
APERIODIC	Configuration for aperiodic reporting
SS-SINR	L1-SINR measurement based on SSB
CSI- SINR	L1-SINR measurement based on CSI-RS
CSI-RS_IMR	Configuration for NZP-CSI-RS based IMR
CSI-IM_IMR	Configuration for CSI-IM based IMR

CSI-ResourceConfig for CMR: Default generic resource configuration for L1-SINR measurements.

Table H.3A.6-2: CSI-ResourceConfig for CMR

Derivation Path: TS 38.508-1 [14], Table 7.3.1-12B			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ResourceConfig ::= SEQUENCE {			
csi-RS-ResourceSetList CHOICE {			
nzp-CSI-RS-SSB SEQUENCE {			
nzp-CSI-RS-ResourceSetList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourceSetsPerConfig)) OF {	1 entry		CSI-RS
NZP-CSI-RS-ResourceSetId[1]	0		
}			
csi-SSB-ResourceSetList SEQUENCE (SIZE (1..maxNrofCSI-SSB-ResourceSetsPerConfig)) OF {	1 entry		SSB
CSI-SSB-ResourceSetId[1]	0		
}			
}			
}			
bwp-Id	BWP-Id of active BWP		
resourceType	aperiodic		APERIODIC
	periodic		PERIODIC
}			

Condition	**Explanation**
SSB	Configuration for SSB based CMR
CSI-RS	Configuration for CSI-RS based CMR

CSI-ResourceConfig for IMR: For NZP-CSI-RS resource configured as dedicated IMR, refer to Table H.3A.6-3; For CSI-IM resource configured as dedicated IMR, refer to Table H.3A.6-4.

Table H.3A.6-3: CSI-ResourceConfig for NZP-CSI-RS as IMR

Derivation Path: TS 38.508-1 [14], Table 7.3.1-12B			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ResourceConfig ::= SEQUENCE {			
csi-ResourceConfigId	CSI-ResourceConfigId-IMR		
	CSI-ResourceConfigId-IMR with condition APERIODIC		APERIODIC
csi-RS-ResourceSetList CHOICE {			
nzp-CSI-RS-SSB SEQUENCE {			
nzp-CSI-RS-ResourceSetList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourceSetsPerConfig)) OF {	1 entry		
NZP-CSI-RS-ResourceSetId[1]	NZP-CSI-RS-ResourceSetId-IMR		
	NZP-CSI-RS-ResourceSetId-IMR with condition APERIODIC		APERIODIC
}			
}			
}			
bwp-Id	BWP-Id of active BWP		

resourceType	aperiodic		APERIODIC
	periodic		PERIODIC
}			

Table H.3A.6-3a: NZP-CSI-RS-ResourceSet for IMR

Derivation Path: TS 38.508-1 [14], Table 7.3.1-11B			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp-CSI-ResourceSetId	NZP-CSI-RS-ResourceSetId-IMR		
	NZP-CSI-RS-ResourceSetId-IMR with condition APERIODIC		APERIODIC
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	2 entries		
NZP-CSI-RS-ResourceId[1]	NZP-CSI-RS-ResourceId for IMR(0)	INTEGER 12	
	NZP-CSI-RS-ResourceId for IMR(0) with condition APERIODIC	INTEGER 22	APERIODIC
NZP-CSI-RS-ResourceId[2]	NZP-CSI-RS-ResourceId for IMR(1)	INTEGER 13	
	NZP-CSI-RS-ResourceId for IMR(1) with condition APERIODIC	INTEGER 23	APERIODIC
}			
aperiodicTriggeringOffset	6		APERIODIC
}			

Table H.3A.6-3b: NZP-CSI-RS-Resource for IMR(Id)

Derivation Path: TS 38.508-1 [14], Table 7.3.1-7B			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	NZP-CSI-RS-ResourceId for IMR(Id)		
	NZP-CSI-RS-ResourceId for IMR(Id) with condition APERIODIC		APERIODIC
resourceMapping SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	0001		
}			
nrofPorts	p1		
firstOFDMSymbolInTimeDomain	6		Id = 0
	10		Id = 1
	7		Id = 0 AND APERIODIC
	11		Id = 1 AND APERIODIC
cdm-Type	noCDM		
density CHOICE {			
three	NULL		
}			
freqBand	CSI-FrequencyOccupation-RRM		See TS 38.508-1 [14], Table 7.3.1-10
}			
powerControlOffset	0		
powerControlOffsetSS	db0		
scramblingID	0		
periodicityAndOffset {			

slots20	1		SCS15
slots40	2		SCS30
}			
periodicityAndOffset	Not present		APERIODIC
qcl-InfoPeriodicCSI-RS	Not present		
}			

Table H.3A.6-3c: NZP-CSI-RS-ResourceSetId-IMR

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-ResourceSetId	1		

Table H.3A.6-4: CSI-ResourceConfig for CSI-IM as IMR

Derivation Path: TS 38.508-1 [14], Table 7.3.1-12B			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ResourceConfig ::= SEQUENCE {			
csi-ResourceConfigId	CSI-IM-ResourceConfigId-IMR		
	CSI-IM-ResourceConfigId-IMR with condition APERIODIC		APERIODIC
csi-RS-ResourceSetList CHOICE {			
csi-IM-ResourceSetList SEQUENCE (SIZE (1..maxNrofCSI-IM-ResourceSetsPerConfig) OF {	1 entry		
CSI-IM-ResourceSetId[1]	CSI-IM-ResourceSetId-IMR		
	CSI-IM-ResourceSetId-IMR with condition APERIODIC		APERIODIC
}			
}			
bwp-Id	BWP-Id of active BWP		
resourceType	aperiodic		APERIODIC
	periodic		PERIODIC
}			

Table H.3A.6-4a: CSI-IM-ResourceSet for IMR

Derivation Path: TS 38.508-1 [14], Table 7.3.1-26			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-IM-ResourceSet ::= SEQUENCE {			
csi-IM-ResourceSetId	CSI-IM-ResourceSetId-IMR		
	CSI-IM-ResourceSetId-IMR with condition APERIODIC		APERIODIC
csi-IM-Resources SEQUENCE (SIZE (1..maxNrofCSI-IM-ResourcesPerSet)) OF CSI-IM-ResourceId {	2 entries		
CSI-IM-ResourceId[1]	CSI-IM-ResourceId for IMR(0)	INTEGER 0	
	CSI-IM-ResourceId for IMR(0) with condition APERIODIC	INTEGER 10	APERIODIC
CSI-IM-ResourceId[2]	CSI-IM-ResourceId for IMR(1)	INTEGER 1	
	CSI-IM-ResourceId for IMR(1) with condition APERIODIC	INTEGER 11	APERIODIC
}			
}			

Table H.3A.6-4b: CSI-IM-Resource for IMR(Id)

Derivation Path: TS 38.508-1 [14], Table 7.3.1-24			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-IM-Resource ::= SEQUENCE {			
csi-IM-ResourceId	CSI-IM-ResourceId for IMR(Id)		
	CSI-IM-ResourceId for IMR(Id) with condition APERIODIC		APERIODIC
csi-IM-ResourceElementPattern CHOICE {			
pattern1 SEQUENCE {			
subcarrierLocation-p1	s0		
symbolLocation-p1	6		Id = 0
	10		Id = 1
	7		Id = 0 AND APERIODIC
	11		Id = 1 AND APERIODIC
}			
}			
freqBand	CSI-FrequencyOccupation-RRM		See TS 38.508-1 [14], Table 7.3.1-10
periodicityAndOffset	CSI-ResourcePeriodicityAndOffset for CSI		
slots20	1		SCS15
slots40	2		SCS30
}			
periodicityAndOffset	Not present		APERIODIC
}			

Table H.3A.6-4c: CSI-IM-ResourceSetId-IMR

Derivation Path: TS 38.331 [6], clause 6.3.2			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-IM-ResourceSetId	0		

H.3.7 RRC messages and information elements contents exceptions for NR cell search when DRX is used

MAC-CellGroupConfig: DRX configuration for NR serving cell

Table H.3.7-1: *MAC-CellGroupConfig:* NR intra-frequency cell search when DRX is used

Derivation Path: TS 38.508-1, Table 4.6.3-68			
Information Element	**Value/remark**	**Comment**	**Condition**
MAC-CellGroupConfig ::= SEQUENCE {			
drx-Config CHOICE {			
setup SEQUENCE {			
drx-onDurationTimer CHOICE {			
milliSeconds	ms1		DRX.1 OR DRX.2 OR DRX.6
	ms6		DRX.3 OR DRX.7 OR DRX.8 OR DRX.11 OR DRX.14

}			
drx-InactivityTimer	ms1		
drx-RetransmissionTimerDL	sl1		
drx-RetransmissionTimerUL	sl1		
drx-LongCycleStartOffset CHOICE {			
ms20	0		DRX.11
ms40	0		DRX.1 or DRX.3
	10		(DRX.1 and Gap) OR (DRX.1 and Offset) OR (DRX.3 and Offset)
	15		DRX.1 and Gap and INTER-FREQ
	20		DRX.3 and Gap
ms320	0		DRX.6 OR DRX.8
	10		DRX.6 and Gap
ms160	0		DRX.14
ms640	0		DRX.2 OR DRX.7
	10		(DRX.2 and Gap) OR (DRX.7 and Offset) OR (DRX.7 and Gap)
	15		(DRX.2 OR DRX.7) and Gap and INTER-FREQ
}			
shortDRX	not present		
drx-SlotOffset	0		
}			
}			
tag-Config SEQUENCE {			
tag-ToReleaseList	Not present		
tag-ToAddModList SEQUENCE (SIZE (1..maxNrofTAGs)) OF SEQUENCE {	1 entry		
tag-Id[1]	0		
timeAlignmentTimer[1]	ms500		DRX.1 OR DRX.2 OR DRX.6
	infinity		DRX.3 OR DRX.7 OR DRX.8 OR DRX.11 OR DRX.14
}			
}			

Condition	Explanation
DRX.1	DRX Configuration 1 according to TS 38.133 [6] A.3.3.1
DRX.2	DRX Configuration 2 according to TS 38.133 [6] A.3.3.2
DRX.3	DRX Configuration 3 according to TS 38.133 [6] A.3.3.3
DRX.6	DRX Configuration 6 according to TS 38.133 [6] A.3.3.6
DRX.7	DRX Configuration 7 according to TS 38.133 [6] A.3.3.7
DRX.8	DRX Configuration 8 according to TS 38.133 [6] A.3.3.8
DRX.14	DRX Configuration 14 according to TS 38.133 [6] A.3.3.14
INTER-FREQ	Configuration for inter-frequency NR measurement tests

Gap	Configuration for tests with measurement gap
Offset	Tests that requires offset for DRX to eliminate overlap of DRX and SMTC

MAC-MainConfig: DRX configuration for E-UTRAN serving cell

Table H.3.7-2: MAC-MainConfig

Derivation Path: 36.508, Table 4.8.2.1.5-1			
Information Element	**Value/remark**	**Comment**	**Condition**
MAC-MainConfig ::= SEQUENCE {			
drx-Config CHOICE {			
setup SEQUENCE {			
onDurationTimer	psf2		DRX.4 OR DRX.9
	psf6		DRX.5 OR DRX.10 OR DRX.12
drx-InactivityTimer	psf2		DRX.4 OR DRX.12
	psf1920		DRX.5 OR DRX.10
	psf100		DRX.9
longDRX-CycleStartOffset CHOICE {			
sf160	0		DRX.4
sf320	0		DRX.5
	10		DRX.5 and Gap
sf40	0		DRX.9
	10		DRX.9 and Gap
sf640	0		DRX.10 OR DRX.12
	10		DRX.12 and Gap
}			
}			
}			
timeAlignmentTimerDedicated	infinity		DRX.4 OR DRX.5 OR DRX.12
	sf500		DRX.9 OR DRX.10
}			

Condition	Explanation
DRX.4	DRX Configuration 4 according to TS 38.133 [6] A.3.3.4
DRX.5	DRX Configuration 5 according to TS 38.133 [6] A.3.3.5
DRX.9	DRX Configuration 9 according to TS 38.133 [6] A.3.3.9
DRX.10	DRX Configuration 10 according to TS 38.133 [6] A.3.3.10
DRX.12	DRX Configuration 12 according to TS 38.133 [6] A.3.3.12

H.3.8 RRC messages and information elements contents exceptions for NR RRC reconfiguration delay

ServingCellConfigCommonSIB: information elements content exception for RRC reconfiguration delay test cases to specific both NR uplink and supplementary uplink for SCell.

Table H.3.8-1: ServingCellConfigCommonSIB-Procedure Delay

Derivation Path: TS 38.508-1, table 4.6.3-169

Information Element	Value/remark	Comment	Condition
ServingCellConfigCommonSIB ::= SEQUENCE {			
downlinkConfigCommon	DownlinkConfigCommonSIB		
uplinkConfigCommon	UplinkConfigCommonSIB	NR uplink	
	UplinkConfigCommonSIB with condition SUL_NUL		SUL
supplementaryUplink	UplinkConfigCommonSIB with condition SUL_SUL		SUL
n-TimingAdvanceOffset	Not present		
ssb-PositionsInBurst SEQUENCE {			
inOneGroup	'0100 0000'B	When carrier frequency is smaller than or equal to 3 GHz, only the 4 leftmost bits are valid;	
groupPresence	Not present		
}			
ssb-PeriodicityServingCell	ms20		
tdd-UL-DL-ConfigurationCommon	TDD-UL-DL-ConfigCommon		FR1_TDD
ss-PBCH-BlockPower	0		
}			

RRCReconfiguration: information elements contents exception for RRC reconfiguration delay test cases to specific radio bearers and cell groups.

Table H.3.8-2: RRCReconfiguration-Procedure Delay

Derivation Path: TS 38.508-1, table 4.6.1-13			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration::= SEQUENCE {			
criticalExtensions CHOICE {			
c1 CHOICE {			
rrcReconfiguration ::= SEQUENCE {			
radioBearerConfig	RadioBearerConfig with conditions SRB2 and DRB1		
}			
secondaryCellGroup	CellGroupConfig with condition EN-DC_SCell_add	OCTET STRING (CONTAINING CellGroupConfig)	
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig with conditions EN-DC	OCTET STRING (CONTAINING CellGroupConfig)	
}			
}			
}			
}			

H.3.9 RRC messages and information elements contents exceptions for UL timing

Table H.3.9-1: *PUSCH-TimeDomainResourceAllocationList*

Derivation Path: TS 38.508-1, Table 4.6.3-122			
Information Element	**Value/remark**	**Comment**	**Condition**
PUSCH-TimeDomainResourceAllocationList ::= SEQUENCE (SIZE(1..maxNrofUL-Allocations)) OF {	2 entries		
PUSCH-TimeDomainResourceAllocation[1] SEQUENCE {			

startSymbolAndLength	41	Start symbol(S)=0, Length(L)=13	
}			
PUSCH-TimeDomainResourceAllocation[2] SEQUENCE {		addressed by Msg3 PUSCH time resource allocation field of the Random Access Response acc. to TS 38.213 [22] Table 8.2-1.	
startSymbolAndLength	41	Start symbol(S)=0, Length(L)=13	
}			
}			

H.3.10 RRC messages and information elements contents exceptions for Shared Spectrum Access

Table H.3.10-1: *ServingCellConfigCommon* for Shared Spectrum Access

Derivation Path: TS 38.508-1, Table 4.6.3-168			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfigCommon ::= SEQUENCE {			
ssb-PositionsInBurst CHOICE {			
mediumBitmap	10000000		SSB.1 CCA
	10100000		SSB.2 CCA
	11000000		SSB.3 CCA
	11110000		SSB.4 CCA
}			
channelAccessMode-r16 CHOICE {			
dynamic	NULL		Dynamic
semiStatic SEQUENCE {			SemiStatic
period	ms2		
}			
}			
discoveryBurstWindowLength-r16	ms1	DBT.1	
ssb-PositionQCL-r16	n1		SSB.1 CCA SSB.2 CCA
	n2		SSB.3 CCA SSB.4 CCA
}			

Condition	Explanation
SSB.X CCA	SSB pattern SSB.X CCA configured as per section A.3A (X = {1,2,3,4})
Dynamic	Dynamic channel access
SemiStatic	Semi-static channel access

Table H.3.10-2: SSB-MTC for Shared Spectrum Access

Derivation Path: Table 38.508-1 Table 7.3.1-3			
Information Element	**Value/remark**	**Comment**	**Condition**
SSB-MTC ::= SEQUENCE {			
periodicityAndOffset CHOICE {			
sf20	0		SMTC.1 SMTC.2
	10		SMTC.4 SMTC.5
}			
duration	sf1		SMTC.1 SMTC.4
	sf5		SMTC.2 SMTC.5

}			

Condition	Explanation
SMTC.X	SMTC pattern SMTC.X configured as per section A.4 (X = {1,2,4,5})

Table H.3.10-3: *MeasResultForRSSI* for Shared Spectrum Access

Derivation Path: TS 38.508-1, Table 4.6.3-78AA			
Information Element	**Value/remark**	**Comment**	**Condition**
MeasResultForRSSI ::= SEQUENCE {			
rssi-Result-r16	measResultRSSI	RSSI-Range-r16, integer (0..76)	RSSI
channelOccupancy-r16	measResultChannelOccupancy	Integer (0..100)	Channel_Occupancy
}			

Condition	Explanation
RSSI	RSSI measurements
Channel_Occupancy	Channel Occupancy measurements

H.3.11 RRC messages and information elements contents exceptions for UL Tx switching

CellGroupConfig-R16-R17

Rel-16 1T-2T or Rel-17 2T-2T UL Tx switch configuration for PCell and 1 SCell or 2 intra-band contiguous SCells.

Table H.3.11-1: CellGroupConfig-R16-R17

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
spCellConfig SEQUENCE {			
rlf-TimersAndConstants	Not present		
spCellConfigDedicated	ServingCellConfig-TxSwitch	Table H.3.11-3 PCell (Cell 1)	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	1 entry		
SCellConfig[1] SEQUENCE {		entry 1	
sCellIndex	1		
sCellConfigCommon	ServingCellConfigCommon with condition SCell_add	TS 38.508-1 [14] Table 4.6.3-168	
sCellConfigDedicated	ServingCellConfig-TxSwitch	Table H.3.11-3 1st SCell (Cell 2)	
}			
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	2 entries		2SCELLS
SCellConfig[1] SEQUENCE {		entry 1	
sCellIndex	1		
sCellConfigCommon	ServingCellConfigCommon with condition SCell_add	TS 38.508-1 [14] Table 4.6.3-168	
sCellConfigDedicated	ServingCellConfig-TxSwitch	Table H.3.11-3 1st SCell (Cell 2)	
}			
SCellConfig[2] SEQUENCE {		entry 2	
sCellIndex	2		
sCellConfigCommon	ServingCellConfigCommon with condition SCell_add	TS 38.508-1 [14] Table 4.6.3-168	

sCellConfigDedicated	ServingCellConfig-TxSwitch	Table H.3.11-3 2nd SCell (Cell 3)	
}			
}			
bap-Address-r16	Not present		
bh-RLC-ChannelToAddModList-r16	Not present		
bh-RLC-ChannelToReleaseList-r16	Not present		
f1c-TransferPath-r16	Not present		
simultaneousTCI-UpdateList1-r16	Not present		
simultaneousTCI-UpdateList2-r16	Not present		
simultaneousSpatial-UpdatedList1-r16	Not present		
simultaneousSpatial-UpdatedList2-r16	Not present		
uplinkTxSwitchingOption-r16	switchedUL		pc_uplinkTxSwitching_OptionSupport_switchedUL_r16 OR pc_uplinkTxSwitching_OptionSupport_both_r16 OR pc_uplinkTxSwitching_OptionSupport_switchedUL_r17 OR pc_uplinkTxSwitching_OptionSupport_both_r17
	dualUL		pc_uplinkTxSwitching_OptionSupport_dualUL_r16 OR pc_uplinkTxSwitching_OptionSupport_dualUL_r17
uplinkTxSwitchingPowerBoosting-r16	Not present		
uplinkTxSwitching-2T-Mode-r17	Not present		1T-2T
	enabled		2T-2T
}			

Condition	Explanation
2SCELLS	In case two intra-band contiguous SCells are used in UL Tx switching tests
1T-2T	For 1T-2T UL Tx switching tests
2T-2T	For 2T-2T UL Tx switching tests

CellGroupConfig-R18

Rel-18 UL Tx switch configuration for PCell and 2 or 3 inter-band SCells over 3 or 4 bands.

Table H.3.11-2: CellGroupConfig-R18

Derivation Path: TS 38.508-1 [14], Table 4.6.3-19 with condition SCell_add			
Information Element	**Value/remark**	**Comment**	**Condition**
CellGroupConfig ::= SEQUENCE {			
mac-CellGroupConfig	Not present		
mac-CellGroupConfig SEQUENCE {			DualTAGs
tag-Config SEQUENCE {			
tag-ToReleaseList	Not present		
tag-ToAddModList SEQUENCE (SIZE (1..maxNrofTAGs)) OF TAG {	2 entries		
TAG[1] SEQUENCE {		entry 1	
tag-Id	0		
timeAlignmentTimer	infinity		
}			
TAG[2] SEQUENCE {		entry 2	
tag-Id	1		
timeAlignmentTimer	infinity		

}			
}			
spCellConfig SEQUENCE {			
rlf-TimersAndConstants	Not present		
spCellConfigDedicated	ServingCellConfig-TxSwitch	Table H.3.11-3	
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	2 entries		1T1T-2T
SCellConfig[1] SEQUENCE {		entry 1	
sCellIndex	1	1st SCell (Cell 2)	
sCellConfigCommon	ServingCellConfigCommon with condition SCell_add	TS 38.508-1 [14] Table 4.6.3-168	
sCellConfigDedicated	ServingCellConfig-TxSwitch	Table H.3.11-3	
}			
}			
SCellConfig[2] SEQUENCE {		entry 2	
sCellIndex	2	2nd SCell (Cell 3)	
sCellConfigCommon	ServingCellConfigCommon with condition SCell_add	TS 38.508-1 [14] Table 4.6.3-168	
sCellConfigDedicated	ServingCellConfig-TxSwitch	Table H.3.11-3	
}			
}			
sCellToAddModList SEQUENCE (SIZE (1..maxNrofSCells)) OF SCellConfig {	3 entries		1T1T-1T1T
SCellConfig[1] SEQUENCE {		entry 1	
sCellIndex	1	1st SCell (Cell 2)	
sCellConfigCommon	ServingCellConfigCommon with condition SCell_add	TS 38.508-1 [14] Table 4.6.3-168	
sCellConfigDedicated	ServingCellConfig-TxSwitch	Table H.3.11-3	
}			
}			
SCellConfig[2] SEQUENCE {		entry 2	
sCellIndex	2	2nd SCell (Cell 3)	
sCellConfigCommon	ServingCellConfigCommon with condition SCell_add	TS 38.508-1 [14] Table 4.6.3-168	
sCellConfigDedicated	ServingCellConfig-TxSwitch	Table H.3.11-3	
}			
}			
SCellConfig[3] SEQUENCE {		entry 3	
sCellIndex	3	3rd SCell (Cell 4)	
sCellConfigCommon	ServingCellConfigCommon with condition SCell_add	TS 38.508-1 [14] Table 4.6.3-168	
sCellConfigDedicated	ServingCellConfig-TxSwitch	Table H.3.11-3	
}			
}			
ncr-FwdConfig-r18	Not present		
autonomousDenialParameters-r18	Not present		
nonCollocatedTypeMRDC-r18	Not present		
nonCollocatedTypeNR-CA-r18	Not present		
uplinkTxSwitchingMoreBands-r18 CHOICE {			1T1T-2T

setup SEQUENCE{			
uplinkTxSwitchingBandList-r18 SEQUENCE (SIZE (1..maxSimultaneousBands)) OF FreqBandIndicatorNR {	3 entries		
FreqBandIndicatorNR[1]	FreqBandIndicatorNR of PCell (Cell 1)	entry 1 Band A	
FreqBandIndicatorNR[2]	FreqBandIndicatorNR of 1st SCell (Cell 2)	entry 2 Band B	
FreqBandIndicatorNR[3]	FreqBandIndicatorNR of 2nd SCell (Cell 3)	entry 3 Band C	
}			
uplinkTxSwitchingBandPairList-r18 SEQUENCE (SIZE (1.. maxULTxSwitchingBandPairs)) OF UplinkTxSwitchingBandPairConfig-r18 {	3 entries		
UplinkTxSwitchingBandPairConfig-r18[1] SEQUENCE {		entry 1	
bandInfoUL1-r18	1	Band A	
bandInfoUL2-r18	3	Band C	
switchingOptionConfigForBandPair-r18	switchedUL		pc_uplinkTxSwitching_OptionSupport_switchedUL_r18 OR pc_uplinkTxSwitching_OptionSupport_both_r18
	dualUL		pc_uplinkTxSwitching_OptionSupport_dualUL_r18
switching2T-Mode-r18	Not present		
switchingPeriodConfigForBandPair-r18	Not present	210 us	pc_switchingPeriod_210us_r18
	n35us	35 us	pc_switchingPeriod_35us_r18
	n140us	140 us	pc_switchingPeriod_140us_r18
}			
UplinkTxSwitchingBandPairConfig-r18[2] SEQUENCE {		entry 2	
bandInfoUL1-r18	2	Band B	
bandInfoUL2-r18	3	Band C	
switchingOptionConfigForBandPair-r18	switchedUL		pc_uplinkTxSwitching_OptionSupport_switchedUL_r18 OR pc_uplinkTxSwitching_OptionSupport_both_r18
	dualUL		pc_uplinkTxSwitching_OptionSupport_dualUL_r18
switching2T-Mode-r18	Not present		
switchingPeriodConfigForBandPair-r18	Not present	210 us	pc_switchingPeriod_210us_r18
	n35us	35 us	pc_switchingPeriod_35us_r18
	n140us	140 us	pc_switchingPeriod_140us_r18
}			
UplinkTxSwitchingBandPairConfig-r18[3] SEQUENCE {		entry 3	
bandInfoUL1-r18	1	Band A	
bandInfoUL2-r18	2	Band B	
switchingOptionConfigForBandPair-r18	dualUL		
switching2T-Mode-r18	Not present		

switchingPeriodConfigForBandPair-r18	Not present	210 us	pc_switchingPeriod _210us_r18
	n35us	35 us	pc_switchingPeriod _35us_r18
	n140us	140 us	pc_switchingPeriod _140us_r18
}			
}			
uplinkTxSwitchingAssociatedBandDualUL-List-r18	Not present		
}			
}			
uplinkTxSwitchingMoreBands-r18 CHOICE {			1T1T-1T1T
setup SEQUENCE{			
uplinkTxSwitchingBandList-r18 SEQUENCE (SIZE (1..maxSimultaneousBands)) OF FreqBandIndicatorNR {	4 entries		
FreqBandIndicatorNR[1]	FreqBandIndicatorNR of PCell (Cell 1)	entry 1	
FreqBandIndicatorNR[2]	FreqBandIndicatorNR of 1st SCell (Cell 2)	entry 2	
FreqBandIndicatorNR[3]	FreqBandIndicatorNR of 2nd SCell (Cell 3)	entry 3	
FreqBandIndicatorNR[4]	FreqBandIndicatorNR of 3rd SCell (Cell 4)	entry 4	
}			
uplinkTxSwitchingBandPairList-r18 SEQUENCE (SIZE (1.. maxULTxSwitchingBandPairs)) OF UplinkTxSwitchingBandPairConfig-r18 {	6 entries		
UplinkTxSwitchingBandPairConfig-r18[1] SEQUENCE {		entry 1	
bandInfoUL1-r18	1	Band A	
bandInfoUL2-r18	3	Band C	
switchingOptionConfigForBandPair-r18	switchedUL		pc_uplinkTxSwitching_OptionSupport_switchedUL_r18 OR pc_uplinkTxSwitching_OptionSupport_both_r18
	dualUL		pc_uplinkTxSwitching_OptionSupport_dualUL_r18
switching2T-Mode-r18	Not present		
switchingPeriodConfigForBandPair-r18	Not present	210 us	pc_switchingPeriod _210us_r18
	n35us	35 us	pc_switchingPeriod _35us_r18
	n140us	140 us	pc_switchingPeriod _140us_r18
}			
UplinkTxSwitchingBandPairConfig-r18[2] SEQUENCE {		entry 2	
bandInfoUL1-r18	2	Band B	
bandInfoUL2-r18	3	Band C	
switchingOptionConfigForBandPair-r18	switchedUL		pc_uplinkTxSwitching_OptionSupport_switchedUL_r18 OR pc_uplinkTxSwitching_OptionSupport_both_r18
	dualUL		pc_uplinkTxSwitching_OptionSu

			pport_dualUL_r18
switching2T-Mode-r18	Not present		
switchingPeriodConfigForBandPair-r18	Not present	210 us	pc_switchingPeriod _210us_r18
	n35us	35 us	pc_switchingPeriod _35us_r18
	n140us	140 us	pc_switchingPeriod _140us_r18
}			
UplinkTxSwitchingBandPairConfig-r18[3] SEQUENCE {		entry 3	
bandInfoUL1-r18	1	Band A	
bandInfoUL2-r18	2	Band B	
switchingOptionConfigForBandPair-r18	dualUL		
switching2T-Mode-r18	Not present		
switchingPeriodConfigForBandPair-r18	Not present	210 us	pc_switchingPeriod _210us_r18
	n35us	35 us	pc_switchingPeriod _35us_r18
	n140us	140 us	pc_switchingPeriod _140us_r18
}			
UplinkTxSwitchingBandPairConfig-r18[4] SEQUENCE {		entry 4	
bandInfoUL1-r18	1	Band A	
bandInfoUL2-r18	4	Band D	
switchingOptionConfigForBandPair-r18	switchedUL		pc_uplinkTxSwitching_OptionSupport_switchedUL_r18 OR pc_uplinkTxSwitching_OptionSupport_both_r18
	dualUL		pc_uplinkTxSwitching_OptionSupport_dualUL_r18
switching2T-Mode-r18	Not present		
switchingPeriodConfigForBandPair-r18	Not present	210 us	pc_switchingPeriod _210us_r18
	n35us	35 us	pc_switchingPeriod _35us_r18
	n140us	140 us	pc_switchingPeriod _140us_r18
}			
UplinkTxSwitchingBandPairConfig-r18[5] SEQUENCE {		entry 5	
bandInfoUL1-r18	2	Band B	
bandInfoUL2-r18	4	Band D	
switchingOptionConfigForBandPair-r18	switchedUL		pc_uplinkTxSwitching_OptionSupport_switchedUL_r18 OR pc_uplinkTxSwitching_OptionSupport_both_r18
	dualUL		pc_uplinkTxSwitching_OptionSupport_dualUL_r18
switching2T-Mode-r18	Not present		
switchingPeriodConfigForBandPair-r18	Not present	210 us	pc_switchingPeriod _210us_r18
	n35us	35 us	pc_switchingPeriod _35us_r18

	n140us	140 us	pc_switchingPeriod _140us_r18
}			
UplinkTxSwitchingBandPairConfig-r18[6] SEQUENCE {		entry 6	
bandInfoUL1-r18	3	Band C	
bandInfoUL2-r18	4	Band D	
switchingOptionConfigForBandPair-r18	dualUL		
switching2T-Mode-r18	Not present		
switchingPeriodConfigForBandPair-r18	Not present	210 us	pc_switchingPeriod _210us_r18
	n35us	35 us	pc_switchingPeriod _35us_r18
	n140us	140 us	pc_switchingPeriod _140us_r18
}			
}			
uplinkTxSwitchingAssociatedBandDualUL-List-r18	Not present		
}			
}			
}			

Condition	Explanation
DualTAGs	For tests in which two TAGs are configured
1T1T-2T	For Band A (1T)+Band B (1T) to Band C (2T) UL Tx switching tests
1T1T-1T1T	For Band A (1T)+Band B (1T) to Band C (1T)+Band D (1T) UL Tx switching tests

ServingCellConfig-TxSwitch

To provide dedicated serving cell configurations for PCell/SCell(s) in UL Tx switching tests.

Table H.3.11-3: *ServingCellConfig-TxSwitch*

Derivation Path: TS 38.508-1 [14], Table 4.6.3-167 with condition DLBWP_add and ULBWP_add			
Information Element	**Value/remark**	**Comment**	**Condition**
ServingCellConfig ::= SEQUENCE {			
uplinkConfig SEQUENCE {			
uplinkBWP-ToAddModList SEQUENCE (SIZE (1..maxNrofBWPs)) OF SEQUENCE {	1 entry		
BWP-Uplink[1] SEQUENCE {		entry 1	
bwp-Dedicated SEQUENCE {			
srs-Config CHOICE {			
setup	SRS-Config-TxSwitch	Table H.3.11-4 Associated conditions shall be specified in test	
}			
}			
}			
}			
enablePL-RS-UpdateForPUSCH-SRS-r16	Not present		
enableDefaultBeamPL-ForPUSCH0-0-r16	Not present		
enableDefaultBeamPL-ForPUCCH-r16	Not present		
enableDefaultBeamPL-ForSRS-r16	Not present		
uplinkTxSwitching-r16	Not present		1T1T-2T OR 1T1T-1T1T
uplinkTxSwitching-r16 CHOICE {			1T-2T OR 2T-2T
setup SEQUENCE {			
uplinkTxSwitchingPeriodLocation-r16	true		PCELL
	false		

uplinkTxSwitchingCarrier-r16	carrier1		PCELL
	carrier2		
}			
}			
mpr-PowerBoost-FR2-r16	Not present		
}			
csi-MeasConfig	CSI-MeasConfig-TxSwitch	Table H.3.11-5 Associated conditions shall be specified in test	
tag-Id	0		
	1		2ND_TAG
}			

Condition	Explanation
1T-2T	For 1T-2T UL Tx switching
2T-2T	For 2T-2T UL Tx switching
1T1T-2T	For Band A (1T)+Band B (1T) to Band C (2T) UL Tx switching
1T1T-1T1T	For Band A (1T)+Band B (1T) to Band C (1T)+Band D (1T) UL Tx switching
PCELL	Configuration for PCell in UL Tx switching tests
2ND_TAG	For Cell in 2nd TAG

SRS-Config-TxSwitch

To provide SRS configurations for PCell/SCell(s) in UL Tx switching tests.

Table H.3.11-4: SRS-Config-TxSwitch

Derivation Path: TS 38.508-1 [14], Table 4.6.3-182			
Information Element	**Value/remark**	**Comment**	**Condition**
SRS-Config ::= SEQUENCE {			
srs-ResourceSetToAddModList SEQUENCE (SIZE(0..maxNrofSRS-ResourceSets)) OF SRS-ResourceSet {	1 entry		
SRS-ResourceSet[1] SEQUENCE {		entry 1	
resourceType CHOICE {			
periodic SEQUENCE {			
associatedCSI-RS	Not present		
}			
}			
}			
}			
srs-ResourceToAddModList SEQUENCE (SIZE(1..maxNrofSRS-Resources)) OF SRS-Resource {	1 entry		
SRS-Resource[1] SEQUENCE {		entry 1	
nrofSRS-Ports	ports2		2TX
	port1		
resourceMapping SEQUENCE {			
nrofSymbols	n2		
}			
freqHopping SEQUENCE {			
c-SRS	14		FDD
	25		TDD
}			
groupOrSequenceHopping	neither		
resourceType CHOICE {			
periodic SEQUENCE {			
periodicityAndOffset-p CHOICE {			
sl10	6		FDD AND SwitchFrom
sl20	5		TDD AND SwitchFrom
sl20	3		TDD AND SwitchTo
}			
}			
}			

}			
}			
}			

Condition	Explanation
2TX	For Bands supporting 2Tx UL-MIMO
SwitchFrom	For the switch-from Cells in UL Tx switching tests
SwitchTo	For the switch-to Cells in UL Tx switching tests

CSI-MeasConfig-TxSwitch

To provide aperiodic CSI-RS resource configurations on PCell/SCell(s) and aperiodic L1-RSRP reporting configurations on PCell in UL Tx switching tests.

Table H.3.11-5: CSI-MeasConfig-TxSwitch

Derivation Path: TS 38.508-1 [14] Table 7.3.1-6			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-MeasConfig::= SEQUENCE {			
nzp-CSI-RS-ResourceToAddModList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-Resources)) OF NZP-CSI-RS-Resource {	1 entry		
NZP-CSI-RS-Resource [1]	NZP-CSI-RS-Resource-TxSwitch	entry 1 Table H.3.11-6	
}			
nzp-CSI-RS-ResourceSetToAddModList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourceSets)) OF NZP-CSI-RS-ResourceSet {	1 entry		
NZP-CSI-RS-ResourceSet[1]	NZP-CSI-RS-ResourceSet-TxSwitch	entry 1 Table H.3.11-7	
}			
csi-IM-ResourceToAddModList	Not present		
csi-ResourceConfigToAddModList SEQUENCE (SIZE (1..maxNrofCSI-ResourceConfigurations)) OF CSI-ResourceConfig {	1 entry		
CSI-ResourceConfig[1]	CSI-ResourceConfig-TxSwitch	entry 1 Table H.3.11-8	
}			
csi-ReportConfigToAddModList SEQUENCE (SIZE (1..maxNrofCSI-ReportConfigurations)) OF CSI-ReportConfig {	1 entry		
CSI-ReportConfig[1]	CSI-ReportConfig-TxSwitch(6)	entry 1 Table H.3.11-9 reportSlotOffset = 6	FDD-TDD AND SwitchFrom
	CSI-ReportConfig-TxSwitch(11)	entry 1 Table H.3.11-9 reportSlotOffset = 11	TDD-TDD AND SwitchFrom
	CSI-ReportConfig-TxSwitch(11)	entry 1 Table H.3.11-9 reportSlotOffset = 11	FDD-TDD AND SwitchTo
	CSI-ReportConfig-TxSwitch(10)	entry 1 Table H.3.11-9 reportSlotOffset = 10	TDD-TDD AND SwitchTo
}			
reportTriggerSize	1		
aperiodicTriggerStateList CHOICE {			
setup	CSI-AperiodicTriggerStateList-TxSwitch	Table H.3.11-10	
}			
}			

Condition	Explanation
SwitchFrom	For the switch-from Cells in UL Tx switching tests
SwitchTo	For the switch-to Cells in UL Tx switching tests
FDD-TDD	For FDD-TDD UL Tx switching tests
TDD-TDD	For TDD-TDD UL Tx switching tests

NZP-CSI-RS-Resource-TxSwitch

To provide aperiodic CSI-RS resource configurations for PCell/SCell(s) in UL Tx switching tests.

Table H.3.11-6: NZP-CSI-RS-Resource-TxSwitch

Derivation Path: TS 38.508-1[14] Table 7.3.1-7B with condition APERIODIC			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-Resource ::= SEQUENCE {			
nzp-CSI-RS-ResourceId	0		
resourceMapping SEQUENCE {			
frequencyDomainAllocation CHOICE {			
row1	000001		
}			
firstOFDMSymbolInTimeDomain	8		FDD AND (pc_switchingPeriod_210us_r16 OR pc_switchingPeriod_210us_r17 OR pc_switchingPeriod_210us_r18) AND (pc_uplinkTxSwitching_DL_Interruption_r16 OR pc_uplinkTxSwitching_DL_Interruption_r17 OR pc_uplinkTxSwitching_DL_Interruption_r18)
	4		TDD AND (pc_switchingPeriod_210us_r16 OR pc_switchingPeriod_210us_r17 OR pc_switchingPeriod_210us_r18) AND (pc_uplinkTxSwitching_DL_Interruption_r16 OR pc_uplinkTxSwitching_DL_Interruption_r17 OR pc_uplinkTxSwitching_DL_Interruption_r18)
	9		FDD AND (pc_switchingPeriod_140us_r16 OR pc_switchingPeriod_140us_r17 OR pc_switchingPeriod_140us_r18) AND (pc_uplinkTxSwitching_DL_Interruption_r16 OR pc_uplinkTxSwitching_DL_Interruption_r17 OR pc_uplinkTxSwitching_DL_Interruption_r18)
	5		TDD AND (pc_switchingPeriod_140us_r16 OR pc_switchingPeriod_140us_r17 OR pc_switchingPeriod_140us_r18) AND (pc_uplinkTxSwitching_DL_Interruption_r16 OR pc_uplinkTxSwitching_DL_Interruption_r17 OR pc_uplinkTxSwitching_DL_Interruption_r18)
	10		FDD AND (pc_switchingPeriod_35us_r16 OR pc_switchingPeriod_35us_r17 OR pc_switchingPeriod_35us_r18) AND (pc_uplinkTxSwitching_DL_Interruption_r16 OR pc_uplinkTxSwitching_DL_Interruption_r17 OR

			pc_uplinkTxSwitching_DL_Interruption_r18)
	8		TDD AND (pc_switchingPeriod_35us_r16 OR pc_switchingPeriod_35us_r17 OR pc_switchingPeriod_35us_r18) AND (pc_uplinkTxSwitching_DL_Interruption_r16 OR pc_uplinkTxSwitching_DL_Interruption_r17 OR pc_uplinkTxSwitching_DL_Interruption_r18)
	12		FDD AND NOT (pc_uplinkTxSwitching_DL_Interruption_r16 OR pc_uplinkTxSwitching_DL_Interruption_r17 OR pc_uplinkTxSwitching_DL_Interruption_r18)
	10		TDD AND NOT (pc_uplinkTxSwitching_DL_Interruption_r16 OR pc_uplinkTxSwitching_DL_Interruption_r17 OR pc_uplinkTxSwitching_DL_Interruption_r18)
}			
powerControlOffset	-6		
powerControlOffsetSS	db6	6dB power boost	
}			

Table H.3.11-7: NZP-CSI-RS-ResourceSet-TxSwitch

Derivation Path: TS 38.508-1 [14] Table 7.3.1-11B with condition APERIODIC			
Information Element	**Value/remark**	**Comment**	**Condition**
NZP-CSI-RS-ResourceSet ::= SEQUENCE {			
nzp-CSI-ResourceSetId	0		
nzp-CSI-RS-Resources SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourcesPerSet)) OF NZP-CSI-RS-ResourceId {	1 entry		
NZP-CSI-RS-ResourceId[1]	0	entry 1	
}			
}			

CSI-ResourceConfig-TxSwitch

To provide CSI resource configurations for PCell/SCell(s) in UL Tx switching tests.

Table H.3.11-8: CSI-ResourceConfig-TxSwitch

Derivation Path: TS 38.508-1 [14] Table 7.3.1-12B with condition APERIODIC			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ResourceConfig ::= SEQUENCE {			
csi-ResourceConfigId	0		
csi-RS-ResourceSetList CHOICE {			
nzp-CSI-RS-SSB SEQUENCE {			
nzp-CSI-RS-ResourceSetList SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourceSetsPerConfig)) OF NZP-CSI-RS-ResourceSetId {	1 entry		
NZP-CSI-RS-ResourceSetId[1]	0	Entry 1	
}			
}			
}			
bwp-Id	1		

}			

CSI-ReportConfig-TxSwitch (slotOffset)

To provide aperiodic CSI reporting configuration on serving cell. *slotoffset* is the configured *reportSlotOffset* (in slots).

Table H.3.11-9: CSI-ReportConfig-TxSwitch (*slotOffset*)

Derivation Path: TS 38.508[14] Table 7.3.1-12G with condition APERIODIC			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-ReportConfig ::= SEQUENCE {			
reportConfigId	0		
reportConfigType CHOICE {			
aperiodic SEQUENCE {			
reportSlotOffsetList SEQUENCE (SIZE (1..maxNrofUL-Allocations)) OF {	1 entry		
INTEGER[1]	*slotOffset*		
}			
}			
}			
}			

CSI-AperiodicTriggerStateList-TxSwitch

To provide aperiodic CSI reporting triggering state configuration on serving cell.

Table H.3.11-10: CSI-AperiodicTriggerStateList-TxSwitch

Derivation Path: 38.508-1 [14] Table 7.3.1-12J			
Information Element	**Value/remark**	**Comment**	**Condition**
CSI-AperiodicTriggerStateList ::= SEQUENCE (SIZE (1..maxNrOfCSI-AperiodicTriggers)) OF CSI-AperiodicTriggerState {	1 entry		
CSI-AperiodicTriggerState[1] SEQUENCE {		entry 1	
associatedReportConfigInfoList SEQUENCE (SIZE(1..maxNrofReportConfigPerAperiodicTrigger)) OF CSI-AssociatedReportConfigInfo {	1 entry		
CSI-AssociatedReportConfigInfo[k: k=1,..,m] SEQUENCE {		entry k For k-th switch-from cell	
reportConfigId	0		
resourcesForChannel CHOICE {			
nzp-CSI-RS SEQUENCE {			
resourceSet	0		
qcl-info SEQUENCE (SIZE(1..maxNrofAP-CSI-RS-ResourcesPerSet)) OF TCI-StateId {	1 entry		
TCI-StateId[1]	0	QCL to SSB #0	
}			
}			
}			
}			
}			
}			

TDD-UL-DL-ConfigCommon-TxSwitch

To provide common TDD UL/DL configuration for UL Tx switch tests

Table H.3.11-11: TDD-UL-DL-ConfigCommon-TxSwitch

Derivation Path: 38.508-1[14] Table 7.3.1-1 with condition TDDConf.2.1			
Information Element	**Value/remark**	**Comment**	**Condition**
TDD-UL-DL-ConfigCommon ::= SEQUENCE {			

pattern1 SEQUENCE {			
nrofDownlinkSymbols	11		
nrofUplinkSymbols	2		
}			
}			

H.3.12 RRC messages and information elements contents exceptions for L1/L2-triggered mobility

RRCReconfiguration

To setup NR Measurement Configuration.

Table H.3.12-1: *RRCReconfiguration*: LTM Configuration

Derivation Path: TS 38.508-1 [14], Table 4.6.1-13 with condition LTM			
Information Element	**Value/remark**	**Comment**	**Condition**
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	Not present		
masterCellGroup SEQUENCE {			L1-RSRP
spCellConfigDedicated SEQUENCE {			
csi-MeasConfig SEQUENCE {			
ltm-CSI-ReportConfigToAddModList-r18 SEQUENCE (SIZE (1..maxNrofLTM-CSI-ReportConfigurations-r18)) OF LTM-CSI-ReportConfig-r18 {	1 entry		
LTM-CSI-ReportConfig-r18[1]	LTM-CSI-ReportConfig-r18		
}			
}			
}			
}			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
nonCriticalExtension SEQUENCE {			
ltm-Config-r18 CHOICE {			
setup	LTM-Config-r18	LTM Configuration	
}			
}			
}			
}			
}			
}			
}			
}			
}			

Condition	Explanation
L1-RSRP	Neighbour cell L1-RSRP measurement and report

LTM-Config-r18

Configuration for LTM.

Table H.3.12-2: LTM-Config-r18: Configuration of LTM

Derivation path: TS 38.508-1 [14], Table 4.6.3-67D			
Information Element	**Value/remark**	**Comment**	**Condition**
LTM-Config-r18 ::= SEQUENCE {			
ltm-ReferenceConfiguration-r18	Not present		
ltm-CandidateToReleaseList-r18	Not present		
ltm-CandidateToAddModList-r18 SEQUENCE (SIZE (1..maxNrofLTM-Configs-r18)) OF LTM-Candidate-r18 {	1 entry		
LTM-Candidate-r18[1]	LTM-Candidate-r18	entry 1	
}			
ltm-ServingCellNoResetID-r18	Not present		
ltm-CSI-ResourceConfig-r18	Not present		
ltm-CSI-ResourceConfigToAddModList-r18 SEQUENCE (SIZE (1..maxNrofLTM-CSI-ResourceConfigurations-r18)) OF LTM-CSI-ResourceConfig-r18 {	1 entry		L1-RSRP
LTM-CSI-ResourceConfig-r18[1]	LTM-CSI-ResourceConfig-r18	entry 1	
}			
ltm-CSI-ResourceConfigToReleaseList-r18	Not present		
attemptLTM-Switch-r18	Not present		
	true		Fast Recovery
ltm-ServingCellUE-MeasuredTA-ID-r18	Not present		TA_UE-BASED
	1		
}			

Condition	Explanation
Fast Recovery	LTM fast recovery
TA_UE-BASED	Early UL synchronization – UE based TA measurement

LTM-Candidate-r18

Configuration for LTM candidate.

Table H.3.12-3: LTM-Candidate-r18: Configuration for LTM candidate

Derivation path: TS 38.508-1 [14], Table 4.6.3-67C			
Information Element	**Value/remark**	**Comment**	**Condition**
LTM-Candidate-r18 ::= SEQUENCE {			
ltm-CandidateId-r18	LTM-CandidateId-r18		
ltm-CandidatePCI-r18	PhysCellId		
ltm-SSB-Config-r18	LTM-SSB-Config-r18		
ltm-CandidateConfig-r18	Not present		
ltm-CandidateConfig-r18 OCTET STRING (CONTAINING RRCReconfiguration) {			Candidate Config
RRCReconfiguration ::= SEQUENCE {			
criticalExtensions CHOICE {			
rrcReconfiguration SEQUENCE {			
nonCriticalExtension SEQUENCE {			
masterCellGroup	CellGroupConfig specified in 38.508-1 [14] Table 4.6.3-19 with condition PCell_change		
}			
}			
}			

}			
}			
ltm-ConfigComplete-r18	true		
ltm-EarlyUL-SyncConfig-r18	Not present		
	EarlyUL-SyncConfig-r18		TA_PDCCH-ORDER
ltm-EarlyUL-SyncConfigSUL-r18	Not present		
ltm-TCI-Info-r18	Not present		
	LTM-TCI-Info-r18		TCI_INFO
ltm-NoResetID-r18	Not present		
ltm-UE-MeasuredTA-ID-r18	Not present		
	1		TA_UE-BASED
}			

Condition	Explanation
Candidate Config	LTM candidate configuration
TA_PDCCH-ORDERED	Early UL synchronization – PDCCH-order RACH
TCI_INFO	LTM TCI State List

LTM-CSI-ResourceConfig-r18

Configuration for LTM CSI resource.

Table H.3.12-4: LTM-CSI-ResourceConfig-r18: Configuration for LTM CSI resource

Derivation path: TS 38.508-1 [14], Table 4.6.3-67G			
Information Element	**Value/remark**	**Comment**	**Condition**
LTM-CSI-ResourceConfig-r18 ::= SEQUENCE {			
ltm-CSI-ResourceConfigId-r18	LTM-CSI-ResourceConfigId-r18		
ltm-CSI-SSB-ResourceSet-r18	LTM-CSI-SSB-ResourceSet-r18		
}			

LTM-CSI-ReportConfig-r18

Configuration for LTM CSI report.

Table H.3.12-5: LTM-CSI-ReportConfig-r18: Configuration for LTM CSI report

Derivation path: TS 38.508-1 [14], Table 4.6.3-67E			
Information Element	**Value/remark**	**Comment**	**Condition**
LTM-CSI-ReportConfig-r18 ::= SEQUENCE {			
ltm-CSI-ReportConfigId-r18	LTM-CSI-ReportConfigId		
ltm-ResourcesForChannelMeasurement-r18	LTM-CSI-ResourceConfigId		
ltm-ReportConfigType-r18 CHOICE {			
periodic-r18 SEQUENCE {			
reportSlotConfig-r18			
slots80	2	Periodicity 80 slots and offset 2	SCS15
	7	Periodicity 80 slots and offset 7	SCS30
slots320	4	Periodicity 320 slots and offset 4	SCS120
pucch-CSI-ResourceList-r18 SEQUENCE (SIZE (1..maxNrofBWPs)) OF PUCCH-CSI-Resource {	1 entry		
uplinkBandwidthPartId	BWP-Id of active BWP		
pucch-Resource	pucch-ResourceId	PUCCH-format2 as configured in TS 38.508-1 [14], Table 4.6.3-112	
}			

}			
}			
ltm-ReportContent-r18	LTM-ReportContent-r18		
}			

LTM-CSI-SSB-ResourceSet-r18

Configuration for LTM CSI SSB resource set.

Table H.3.12-6: LTM-CSI-SSB-ResourceSet-r18: Configuration for LTM CSI SSB resource set

Derivation path: TS 38.508-1 [14], Table 4.6.3-67HA			
Information Element	**Value/remark**	**Comment**	**Condition**
LTM-CSI-SSB-ResourceSet-r18 ::= SEQUENCE {			
ltm-CSI-SSB-ResourceList-r18 SEQUENCE (SIZE (1..maxNrofLTM-CSI-SSB-ResourcesPerSet-r18)) OF SSB-Index {	1 entry		
SSB-Index[1]	SSB-Index	entry 1	
}			
ltm-CandidateIdList-r18 SEQUENCE (SIZE (1..maxNrofLTM-CSI-SSB-ResourcesPerSet-r18)) OF LTM-CandidateId-r18 {	1 entry		
LTM-CandidateId-r18[1]	LTM-CandidateId-r18	entry 1	
}			
}			

LTM-QCL-Info-r18

Configuration for LTM QCL information.

Table H.3.12-7: LTM-QCL-Info-r18: Configuration for LTM QCL information

Derivation path: TS 38.508-1 [14], Table 4.6.3-67HB			
Information Element	**Value/remark**	**Comment**	**Condition**
LTM-QCL-Info-r18 ::= SEQUENCE {			
referenceSignal-r18 CHOICE {			
ssb-Index	SSB-Index		SSB
csi-RS-Index	NZP-CSI-RS-ResourceId for TRS(4) specified in TS 38.508-1 [14], table 7.3.1-11		TRS
}			
qcl-Type-r18	typeA		Type A
	typeD		Type D
}			

Condition	Explanation
SSB	Configuration for SSB based LTM QCL
TRS	Configuration for TRS based LTM QCL
Type A	Indicates qcl-type1 of typeA to both FR1 and FR2 test cases
Type D	Indicates qcl-type2 of typeD to FR2 test cases only

LTM-ReportContent-r18

Configuration for LTM report content.

Table H.3.12-8: LTM-ReportContent-r18: Configuration for LTM report content

Derivation path: TS 38.508-1 [14], Table 4.6.3-67HC			
Information Element	**Value/remark**	**Comment**	**Condition**
LTM-ReportContent-r18 ::= SEQUENCE {			
nrOfReportedCells-r18	n1		
nrOfReportedRS-PerCell-r18	n1		

spCellInclusion-r18	Not present		
	true		Include SpCell
}			

Condition	Explanation
Include SpCell	L1-RSRP measurement report associated to current SpCell

LTM-SSB-Config-r18

Configuration for LTM SSB.

Table H.3.12-9: LTM-SSB-Config-r18: Configuration for LTM SSB

Derivation path: TS 38.508-1 [14], Table 4.6.3-67HD			
Information Element	**Value/remark**	**Comment**	**Condition**
LTM-SSB-Config-r18 ::= SEQUENCE {			
ssb-Frequency-r18	ARFCN-ValueNR with condition DL_SSB		
subcarrierSpacing-r18	SubcarrierSpacing		
ssb-Periodicity-r18	ms20		
ssb-PositionsInBurst-r18 CHOICE {			
shortBitmap	0100		FR1 AND SSB#1 AND (1.88GHz<FREQ<=3GHz AND (FDD OR (TDD AND SCS15)) OR FREQ<=1.88GHZ)
	1000		FR1 AND SSB#0 AND (1.88GHz<FREQ<=3GHz AND (FDD OR (TDD AND SCS15)) OR FREQ<=1.88GHz)
mediumBitmap	01000000		FR1 AND SSB#1 AND (1.88GHz<FREQ<=3GHz AND (TDD AND SCS30) OR FREQ>3GHz)
	10000000		FR1 AND SSB#0 AND (1.88GHz<FREQ<=3GHz AND (TDD AND SCS30) OR FREQ>3GHz)
longBitmap	01000000000000000000000000000000000000000000000000000000000000000000000000000000		FR2 AND SSB#1

	10000000000000000000000000000000000000000000000000000000000000000000000000000000		FR2 AND SSB#0
}			
ss-PBCH-BlockPower-r18	0		
}			

Condition	Explanation
FREQ<=1.88GHz	Frequency range <= 1.88GHz
1.88GHz<FREQ<=3GHz	Frequency range > 1.88GHz and <= 3GHz
FREQ>3GHz	Frequency range > 3GHz
SSB#N	Cell configured with SSB-Index set to N as defined in Table 4.4.2-2

LTM-TCI-Info-r18

Configuration for LTM TCI information.

Table H.3.12-10: LTM-TCI-Info-r18: Configuration for LTM TCI information

Derivation path: TS 38.508-1 [14], Table 4.6.3-67l			
Information Element	**Value/remark**	**Comment**	**Condition**
LTM-TCI-Info-r18 ::= SEQUENCE {			
ltm-DL-OrJointTCI-StateToAddModList-r18 SEQUENCE (SIZE (1..maxNrofCandidateTCI-State-r18)) OF CandidateTCI-State-r18 {	n entries	The number of entries depends on the condition	
CandidateTCI-State-r18[1]	TCI-StateId-LTM(2)		
CandidateTCI-State-r18[2]	TCI-StateId-LTM(0)		Joint AND Early DL Sync
	TCI-StateId-LTM(1)		Joint
	TCI-StateId-LTM(3)		Separate
CandidateTCI-State-r18[3]	TCI-StateId-LTM(1)		Joint AND Early DL Sync
}			
ltm-DL-OrJointTCI-StateToReleaseList-r18	Not present		
ltm-UL-TCI-StateToAddModList-r18	Not present		
ltm-UL-TCI-StateToAddModList-r18 SEQUENCE (SIZE (1.. maxNrofCandidateUL-TCI-r18)) OF CandidateTCI-UL-State-r18 {	1 entry		Separate
CandidateTCI-UL-State-r18[1]	CandidateTCI-UL-State-r18	entry 1	
}			
ltm-UL-TCI-StateToReleaseList-r18	Not present		
ltm-NZP-CSI-RS-ResourceToAddModList-r18 SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-Resources)) OF NZP-CSI-RS-Resource {	n entries	n=4	
NZP-CSI-RS-Resource[k, k=1..n]	NZP-CSI-RS-Resource for TRS (k) specified in TS 38.508-1 [14] Table 7.3.1-7 with qcl-InfoPeriodicCSI-RS = TCI-StateId-LTM(2)	entry [k, k=1..n]	
}			
ltm-NZP-CSI-RS-ResourceToReleaseList-r18	Not present		
ltm-NZP-CSI-RS-ResourceSetToAddModList-r18 SEQUENCE (SIZE (1..maxNrofNZP-CSI-RS-ResourceSets)) OF NZP-CSI-RS-ResourceSet {	1 entry		
NZP-CSI-RS-ResourceSet[1]	NZP-CSI-RS-ResourceSet for TRS specified in TS 38.508-1 [14] Table 7.3.1-11 with NZP-CSI-RS-ResourceSetId-TRS = 0	entry 1	

}			
ltm-NZP-CSI-RS-ResourceSetToReleaseList-r18	Not present		
pathlossReferenceRS-ToAddModList-r18 SEQUENCE (SIZE (1..maxNrofPathlossReferenceRSs-r17)) OF PathlossReferenceRS-r17 {	1 entry		
PathlossReferenceRS-r17[1]	PathlossReferenceRS-r17	entry 1	
}			
pathlossReferenceRS-ToReleaseList-r18	Not present		
unifiedTCI-StateType-r18	joint		Joint OR (Joint AND Early DL Sync)
	separate		Separate
}			

Condition	Explanation
Early DL Sync	For Early DL Sync tests
Separate	LTM candidate configuration is configured with ltm-DL-OrJointTCI-StateToAddModList for DL TCI states and ltm-UL-TCI-StatesToAddModList for UL TCI states
Joint	LTM candidate configuration is configured with ltm-DL-OrJointTCI-StateToAddModList for joint TCI states for UL and DL operation

CandidateTCI-State-r18

Configuration for candidate TCI state.

Table H.3.12-11: CandidateTCI-State-r18: Configuration for candidate TCI state

Derivation path: TS 38.508-1 [14], Table 4.6.3-15B			
Information Element	**Value/remark**	**Comment**	**Condition**
CandidateTCI-State-r18 ::= SEQUENCE {			
tci-StateId-r18	TCI-StateId LTM(Id)		
qcl-Type1-r18	LTM-QCL-Info-r18 with conditions SSB and Type A		Id = 0 or 2
	LTM-QCL-Info-r18 with conditions TRS and Type A		Id = 1 or 3
qcl-Type2-r18	LTM-QCL-Info-r18 with conditions SSB and Type D		FR2 AND (Id = 0 or 2)
	LTM-QCL-Info-r18 with conditions TRS and Type D		FR2 AND (Id = 1 or 3)
pathlossReferenceRS-Id-r18	Not present		Id = 2 or 3
	PathlossReferenceRS-Id-r17		Id = 0 or 1
tag-Id-ptr-r18	Not present		
ul-powerControl-r18	Not present		
}			

Condition	Explanation
FR2	Indicates qcl-Type2 of type D, which applies to FR2 only
Id	The ID number of the TCI state

EarlyUL-SyncConfig-r18

Configuration for early UL synchronization.

Table H.3.12-12: EarlyUL-SyncConfig-r18: Configuration for early UL synchronization

Derivation path: TS 38.508-1 [14], Table 4.6.3-56CA			
Information Element	**Value/remark**	**Comment**	**Condition**
EarlyUL-SyncConfig-r18 ::= SEQUENCE {			
frequencyInfoUL-r18	FrequencyInfoUL		
rach-ConfigGeneric-r18	RACH-ConfigGeneric specified in TS 38.508-1 [14] Table 7.3.1-14		
bwp-GenericParameters-r18	BWP		
ssb-PerRACH-Occasion-r18	oneFourth		
prach-RootSequenceIndex-r18 CHOICE {			
l839	Set according to TS 38.508-1 table 4.4.2-2		
l139	Set according to TS 38.508-1 table 4.4.2-2		
}			
ltm-PRACH-SubcarrierSpacing-r18	SubcarrierSpacing		
n-TimingAdvanceOffset-r18	n25600		
ltm-tdd-UL-DL-ConfigurationCommon-r18	Not present		FDD
	TDD-UL-DL-ConfigCommon		TDD
ltm-restrictedSetConfig-r18	unrestrictedSet		
}			

PathlossReferenceRS-r17

Configuration for pathloss of reference RS.

Table H.3.12-13: PathlossReferenceRS-r17: Configuration for pathloss of reference RS

Derivation path: TS 38.508-1 [14], Table 4.6.3-89AA			
Information Element	**Value/remark**	**Comment**	**Condition**
PathlossReferenceRS-r17 ::= SEQUENCE {			
pathlossReferenceRS-Id-r17	PathlossReferenceRS-Id-r17		
referenceSignal-r17 CHOICE {			
ssb-Index	SSB-Index		
}			
additionalPCI-r17	Not present		
}			

ReferenceConfiguration-r18

Configuration for LTM reference.

Table H.3.12-14: ReferenceConfiguration-r18: Void

TDD-UL-DL-ConfigCommon

Configuration for cell specific Uplink/Downlink TDD configuration.

Table H.3.12-15: TDD-UL-DL-ConfigCommon: Configuration for cell specific Uplink/Downlink TDD configuration

Derivation Path: TS 38.508-1 [14] Table 4.6.3-192			
Information Element	**Value/remark**	**Comment**	**Condition**
TDD-UL-DL-ConfigCommon ::= SEQUENCE {			
SubcarrierSpacing	kHz15		TDDConf.1.1, TDDConf.1.2
	kHz30		TDDConf.2.1, TDDConf.2.2, TDDConf.2.3

	kHz120		TDDConf.3.1, TDDConf.3.2
pattern1	Refer to Table A.1.5-1		TDDConf.1.1
	Refer to Table A.1.5-1		TDDConf.1.2
	Refer to Table A.1.5-2		TDDConf.2.1
	Refer to Table A.1.5-2		TDDConf.2.2
	Refer to Table A.1.5-2		TDDConf.2.3
	Refer to Table A.1.5-3		TDDConf.3.1
	Refer to Table A.1.5-3		TDDConf.3.2
pattern2	Refer to Table A.1.5-1		TDDConf.1.1
	Refer to Table A.1.5-1		TDDConf.1.2
	Refer to Table A.1.5-2		TDDConf.2.1
	Refer to Table A.1.5-2		TDDConf.2.3
}			

Condition	Explanation
TDDConf.1.1	TDD UL/DL configuration #1 for SCS=15kHz as defined in Table A.1.5-1
TDDConf.1.2	TDD UL/DL configuration #2 for SCS=15kHz as defined in Table A.1.5-1
TDDConf.2.1	TDD UL/DL configuration #1 for SCS=30kHz as defined in Table A.1.5-2
TDDConf.2.2	TDD UL/DL configuration #2 for SCS=30kHz as defined in Table A.1.5-2
TDDConf.2.3	TDD UL/DL configuration #3 for SCS=30kHz as defined in Table A.1.5-2
TDDConf.3.1	TDD UL/DL configuration #1 for SCS=120kHz as defined in Table A.1.5-3
TDDConf.3.2	TDD UL/DL configuration #2 for SCS=120kHz as defined in Table A.1.5-3

Annex I (normative): RRM OTA procedures

Annex I defines the RRM OTA procedures for the permitted testing methodologies defined in [32].

I.0 Test applicability per permitted test method

The applicability of each permitted test method for the different RRM Angle of Arrival (AoA) setups as defined in Clause A.9 is defined in Table I.0-1.

Table I.0-1: AoA Test Setup applicability per permitted test method

AoA Test Setup	D > 5cm or No declaration	D ≤ 5cm
Setup 1	IFF, Enhanced IFF	DFF, IFF, Enhanced IFF, IFF+DFF
Setup 2a	IFF, Enhanced IFF	DFF, IFF, Enhanced IFF, IFF+DFF
Setup 2b	IFF, Enhanced IFF	DFF, IFF, Enhanced IFF, IFF+DFF
Setup 3	Enhanced IFF	DFF, Enhanced IFF, IFF+DFF
Setup 4a	Enhanced IFF	DFF, Enhanced IFF, IFF+DFF
Setup 4b	Enhanced IFF	DFF, Enhanced IFF, IFF+DFF
NOTE1: D =The diameter of the smallest sphere that encloses the radiating parts of the phase coherent array antenna(s) active at any one time during the test., declared by UE vendor as per Table 4.3.9-9 in TS 38.508-2 NOTE2: DFF indicates both DFF and DFF simplification in TR 38.810. NOTE3: For DFF and DFF part of IFF+DFF, minimum range length needs to meet the requirement as specified in 38.508-1 Annex B.2.2-4 with the declared D		

I.1 Direct far field (DFF)

I.1.1 RX beam peak direction search

The Rx beam peak direction search can be found using any of the following options:

- Same measurement procedure as in clause Annex K.1.2 of TS 38.521-2 [18].
- Any of the procedures described in Annex I.4.

I.1.2 Search for directions corresponding to the EIS spherical coverage percentile

The test directions corresponding to the EIS spherical coverage percentile can be found using any of the following options:

- EIS spherical coverage scan procedure as described in Annex K.1.6 of TS 38.521-2 [18].
- Any of the procedures described in Annex I.4.

I.2 Direct far field (DFF) simplification

I.2.1 RX beam peak direction search

The Rx beam peak direction search can be found using any of the following options:

- Same measurement procedure as in clause Annex K.2.2 of TS 38.521-2 [18].
- Any of the procedures described in Annex I.4.

I.2.2 Search for directions corresponding to the EIS spherical coverage percentile

The test directions corresponding to the EIS spherical coverage percentile can be found using any of the following options:

- EIS spherical coverage scan procedure as described in Annex K.1.6 of TS 38.521-2 [18].
- Any of the procedures described in Annex I.4.

I.3 Indirect far field (IFF)

I.3.1 RX beam peak direction search

The Rx beam peak direction search can be found using any of the following options:

- Same measurement procedure as in clause Annex K.3.2 of TS 38.521-2 [18].
- Any of the procedures described in Annex I.4.

I.3.2 Search for directions corresponding to the EIS spherical coverage percentile

The test directions corresponding to the EIS spherical coverage percentile can be found using any of the following options:

- EIS spherical coverage scan procedure as described in Annex K.1.6 of TS 38.521-2 [18].
- Any of the procedures described in Annex I.4.

I.3A Enhanced indirect far field (Enhanced IFF)

I.3A.1 RX beam peak direction search

Same as in clause I.3.1 for IFF.

I.3A.2 Search for directions corresponding to the EIS spherical coverage percentile

Same as in clause I.3.2 for IFF.

I.4 Procedures to search test directions for RRM FR2

I.4.1 RSRPB-based scan with fallback option to Rx beam peak direction search

This clause provides RSRPB-based scan to find the Rx beam peak of the UE for Setup 1, single AoA cases and one of the test directions for Setup 4. It also provides a method to find test directions fulfilling the EIS Spherical Coverage (TS 38.521-2 [18] clause 7.3.4.3) for Setup 2, 3 and 4. Other approaches are not precluded. RSRPB-based peak beam scan greatly reduces the time to find the peak beam position compared to traditional EIS scan using either constant step size or constant density. The procedure can be used with DFF as well as IFF methodology. The procedure is achieved implementing the following steps:

1. Enable periodic RSRPB reporting from the UE
2. Set of grid points for the UE scan can be user defined set or entire sphere.

3. Set the DL SSB_RP (at the centre of the QZ) to -95 dBm / SCS. For each grid point, record RSRPB first by connecting SS to the DUT through the measurement antenna with Pol_{Link}= θ polarization to form the Rx beam towards the measurement antenna.

4. Wait for BEAM_SELECT_WAIT_TIME before recording the RSRPB reports.

4a For each of the grid points, calculate the RSRPB result for Pol_{Link}= θ as the linear sum of the 2 RSRPB reports (one per receiver branch).

4b Repeat Steps 3, 4 and 4a with Pol_{Link}= ϕ.

5. Once the grid points scan is completed, sort the grid points based on the linear sum of the RSRPB results for Pol_{Link}= θ and Pol_{Link}= ϕ.

6. For the top 10 grid points, run the REFSENS throughput test as per the test condition defined in TS 38.521-2 [18] clause 7.3.2.

7. Select the grid point with the best REFSENS result among the 10 points from Step 6 as the Rx beam peak for RRM test cases using AoA Setup 1 or 4.

8. Use the EIS result for the RRM beam peak to offset the RSRPB results to obtain an estimate of the EIS Spherical coverage (SC) map.

9. From the EIS map in Step 8, select all the points meeting the EIS SC criteria (as defined in TS 38.521-2 [18] Clause 7.3.4.3) as potential test directions for AoA Setup 2a, 2b, 3 and 4. In order to confirm that the grid point is suitable, run the REFSENS throughput test as per the test condition defined in TS 38.521-2 [18] clause 7.3.2 and verify that the EIS SC criteria is met.

If not enough grid points are found using this method, fallback to using the method in Annex I.1, I.2, I.3 or I.3A as applicable.

I.5 Re-Positioning Approach for RRM FR2

This clause provides guidance on the applicability of the re-positioning approach which was originally introduced to reduce measurement uncertainties due to positioner blocking as described in Annex N.3 of [18]. Illustrations of the applicability in the following clauses are based on example 1-AoA and 2-AoA capable RRM test systems shown in Figure I.5-1. The probes shown in blue and red are shown for simplicity as typical microwave probes antennas; any of these probes could be implemented as probe&reflector combinations to yield applicable IFF, Enhanced IFF, IFF+DFF test setups, see Clause I.0. The number of locations of the 2 AoA probes are chosen arbitrarily, i.e., systems with fewer and different probe locations are applicable.

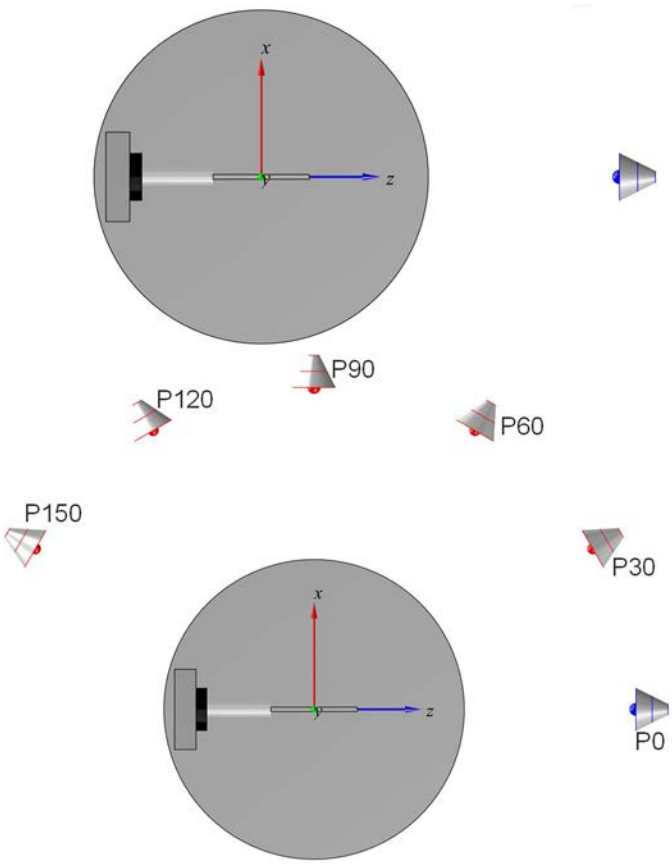

Figure I.5-1: Example combined-axes RRM system setup to support 1 AoA (top) and 1 AoA & 2 AoA test cases (bottom)

The re-positioning approach is applicable to RRM test cases if, during the test case, the pedestal is not obstructing the beam path and it is not in closer proximity to the measurement antenna/reflector than the DUT [18], i.e., for the selected DUT alignment options and orientations only the directions of test (AoA) in the upper hemisphere away from the positioner are tested.

I.5.1 1 AoA Test Cases

The 1 AoA test cases follow Setups 1 and 2, see Clauses A.9.1 and A.9.2, respectively. Here, the re-positioning approach is applicable only when the pedestal is not obstructing the beam path and that the pedestal is not in closer proximity to the measurement antenna/reflector than the DUT. Therefore, for the selected DUT alignment option and orientation, only the upper hemisphere away from the positioner shall be tested for all the test iterations (if applicable), i.e., the positioner shall always be in the back hemisphere of the 1 AoA probe for each test iteration.

This requirement is illustrated next using the example 1 AoA RRM systems from Figure I.5-1. For the example systems in Figure I.5-1 with P0 (shown in blue) used as active probe, the directions of testing (AoA) within the yellow highlighted upper hemisphere shall be considered so the pedestal is not obstructing the beam path. In this case, the re-positioning approach applies and the optimized QoQZ MU is applicable to the assessed MU of the test system. The different test conditions and orientations from Clause N.2 of [18] can be used for each test iteration to prevent the pedestal from obstructing the beam path.

When the directions of testing (AoA) are outside the yellow highlighted upper hemisphere, i.e. the pedestal is obstructing the beam path, the re-positioning approach no longer applies. In this case, the calculated MU for QoQZ shall include the full range of rotation angles described in the QoQZ procedure, Annex O of [18].

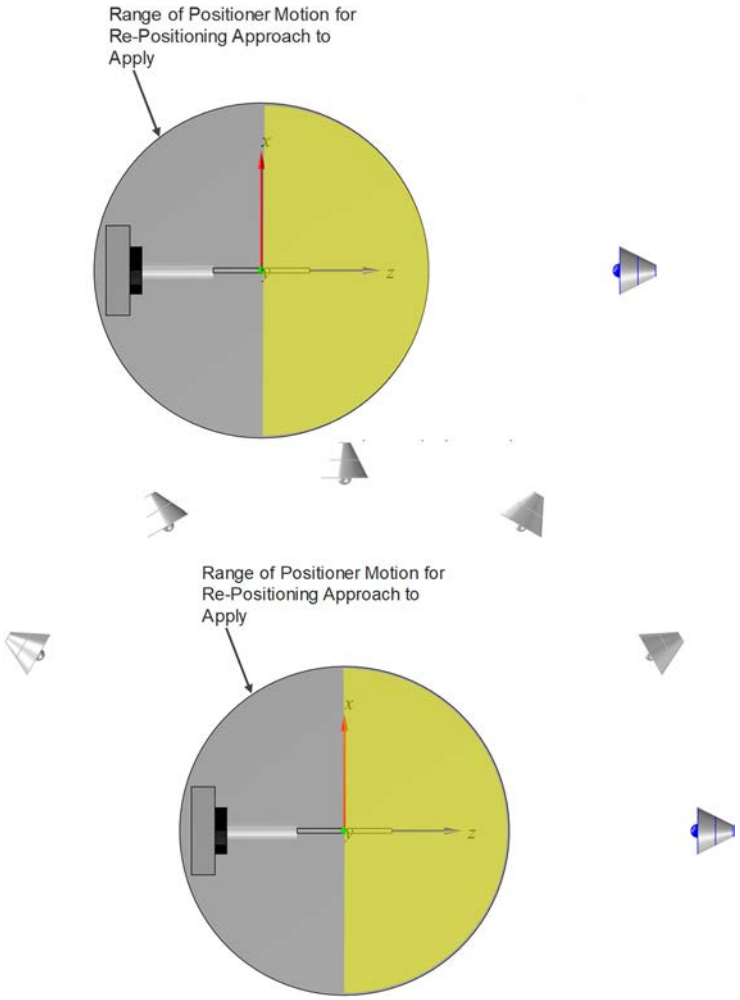

Figure I.5.1-1: Ranges of possible directions of testing (AoA) for 1 AoA TCs that are applicable with re-positioning concept

I.5.2 2 AoA Test Cases

The 2 AoA test cases follow Setups 3 and 4, see Clauses A.9.3 and A.9.4, respectively. Here, the re-positioning approach is applicable only when the pedestal is not obstructing the beam paths between each of the 2 active AoA probes and the pedestal is not in closer proximity to the measurement antennas/reflectors than the DUT. Therefore, for the selected DUT alignment option and orientation, the positioner shall always be in the back hemispheres of each of the active AoA probe for each test iteration.

This requirement is illustrated next using the example 2 AoA RRM system from Figure I.5-1. Figure I.5.2-1 shows the acceptable directions of test for the re-positioner concept separately for each active probe. The directions of testing (AoAs) within the respective yellow highlighted upper hemisphere shall be considered so the pedestal is not obstructing any of the beam paths. In this case, the re-positioning approach applies and the optimized QoQZ MU is applicable to the assessed MU of the test system. The different test conditions and orientations from Clause N.2 of TS 38.521-2 [18] can be used for each test iteration to prevent the pedestal from obstructing the beam paths.

When the directions of testing (AoAs) are outside the yellow highlighted upper hemisphere for at least one active probe, i.e., the pedestal is obstructing at least one beam path, the re-positioning approach no longer applies. In this case, the calculated MU for QoQZ shall include the full range of rotation angles described in the QoQZ procedure, Annex O of [18].

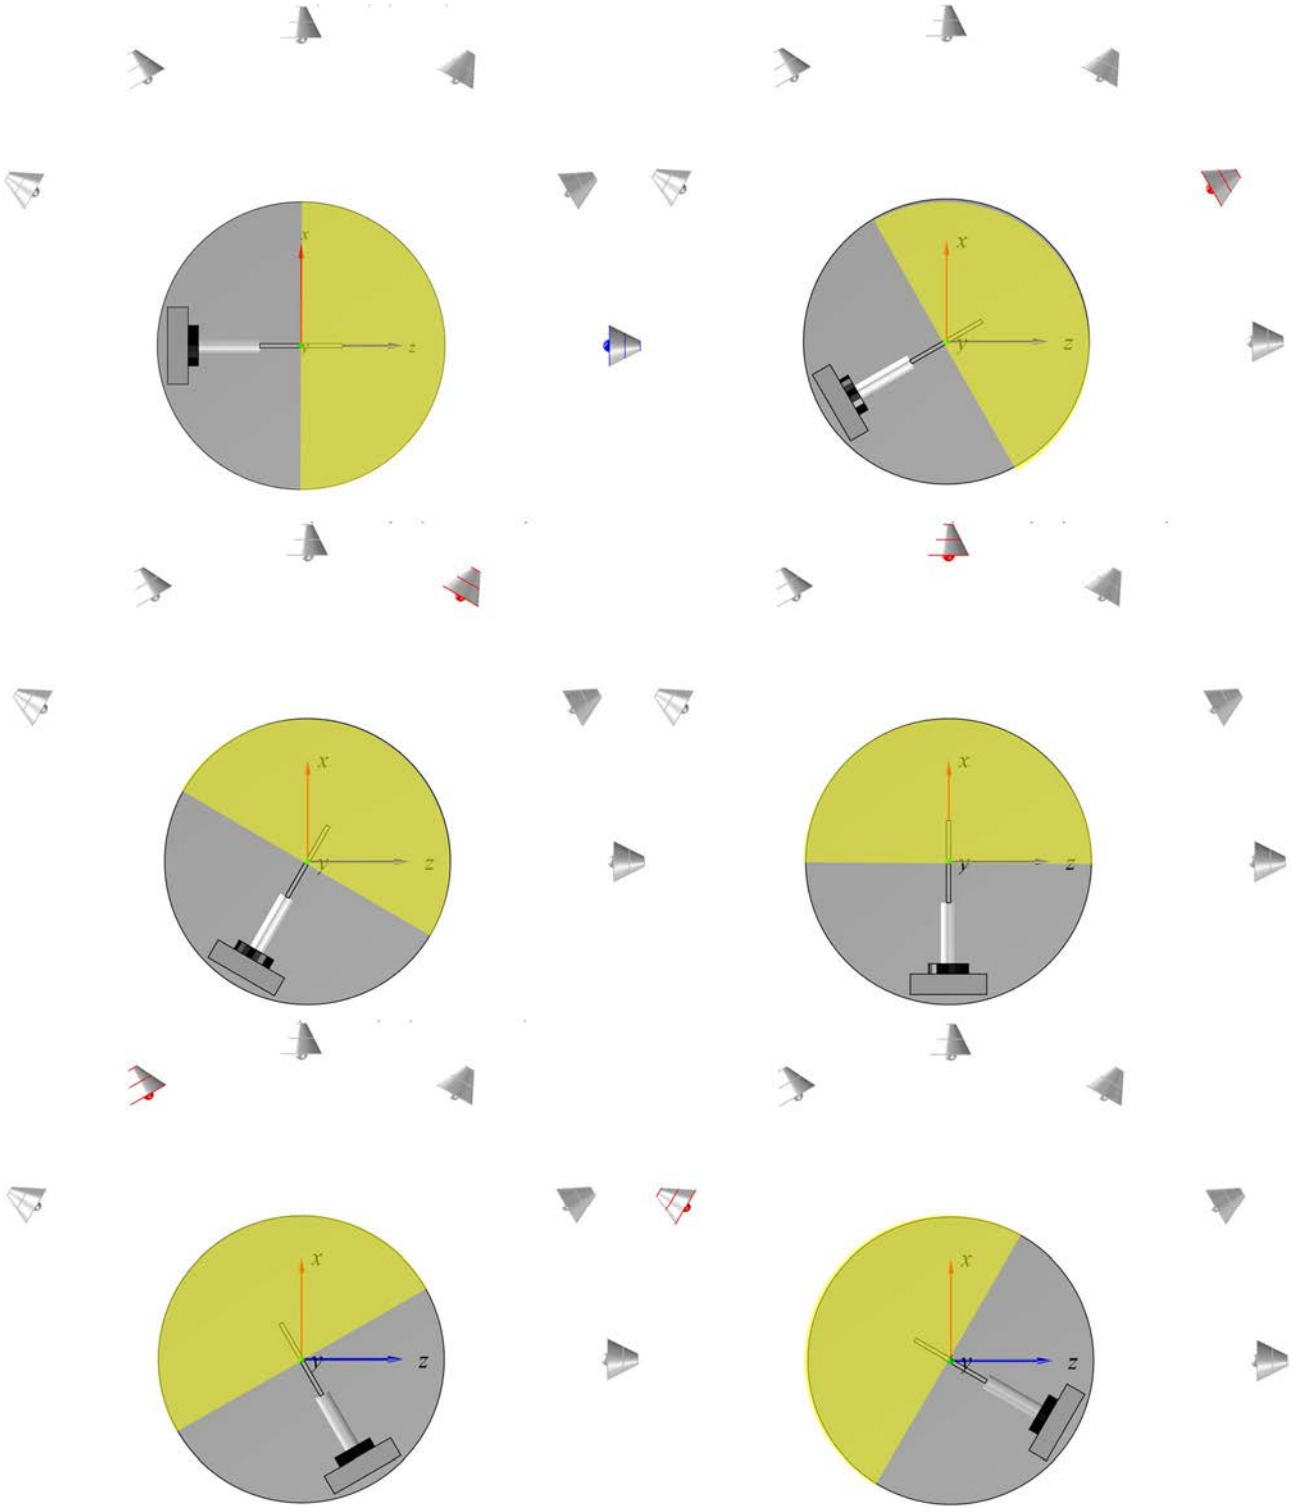

Figure I.5.2-1: Ranges of possible directions of testing (AoAs) for each active probe

Annex J (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2017-08	RAN5#76	R5-175205	-	-	-	Introduction of TS 38.533	0.0.1
2018-08	RAN5#80	R5-184115	-	-	-	Added specification structure including headers up to third level	0.0.2
2018-11	RAN5#81	R5-186706	-	-	-	Added references and common sections	0.1.0
2018-11	RAN5#81	R5-187847	-	-	-	Added RMCs, OCGN, SMTC and SSB configurations to Annex A	0.1.0
2018-11	RAN5#81	R5-187996	-	-	-	Added test cases 6.7.1.1.1 to 6.7.1.2.2	0.1.0
2018-11	RAN5#81	R5-187997	-	-	-	Added test cases 4.6.2.1 to 4.6.2.8	0.1.0
2018-11	RAN5#81	R5-187998	-	-	-	Added test cases 5.6.2.1 to 5.6.2.4	0.1.0
2018-11	RAN5#81	R5-187999	-	-	-	Added test cases 6.6.2.1 to 6.6.2.8	0.1.0
2018-11	RAN5#81	R5-188000	-	-	-	Added test cases 7.6.2.1 to 7.6.2.4	0.1.0
2018-11	RAN5#81	R5-188001	-	-	-	Added test case 4.4.1.1	0.1.0
2018-11	RAN5#81	R5-188002	-	-	-	Added test cases 4.7.1.1.1 to 4.7.1.2.2	0.1.0
2018-11	RAN5#81	R5-188005	-	-	-	Added Annexes B to H	0.1.0
2018-11	RAN5#81	R5-188011	-	-	-	Added test case 4.4.3.1	0.1.0
2019-01	RAN5#4 5G-NR AH	R5-190448	-	-	-	Updating FR1 MU for timing measurements	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190476	-	-	-	Addition of band group power offsets	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190477	-	-	-	Update of the annexes	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190478	-	-	-	Changes to 4.7.1.x tests	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190479	-	-	-	Addition of 4.7.2.x tests	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190480	-	-	-	Addition of 4.7.4.x tests	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190481	-	-	-	Changes to 6.7.1.x tests	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190482	-	-	-	Addition of 6.7.2.x tests	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190483	-	-	-	Addition of 6.7.4.x tests	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190512	-	-	-	Addition of EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode test case 4.5.1.5	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190513	-	-	-	Addition of EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in non-DRX mode test case 4.5.1.6	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190514	-	-	-	Addition of EN-DC FR1 radio link monitoring out-of-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode test case 4.5.1.7	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190515	-	-	-	Addition of EN-DC FR1 radio link monitoring in-sync test for PSCell configured with CSI-RS-based RLM RS in DRX mode test case 4.5.1.8	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190516	-	-	-	Addition of EN-DC FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC test case 4.5.2.1	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190517	-	-	-	Addition of EN-DC FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC test case 4.5.2.2	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190518	-	-	-	Addition of EN-DC FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC test case 4.5.2.3	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190519	-	-	-	Addition of EN-DC FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC test case 4.5.2.4	0.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-01	RAN5#4 5G-NR AH	R5-190520	-	-	-	Addition of EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC test case 4.5.2.5	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190582	-	-	-	Annex F correction	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190803	-	-	-	Update Annex G in TS 38.533	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190874	-	-	-	Addition of NR test case 6.6.1.1-reporting without gap non-DRX	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190875	-	-	-	Addition of NR test case 6.6.1.2-reporting without gap DRX	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190876	-	-	-	Addition of NR test case 6.6.1.3-with gap non DRX	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190877	-	-	-	Addition of NR test case 6.6.1.4-with gap DRX	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190878	-	-	-	Addition of NR test case 6.6.1.5-without gap non DRX SBI reading	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190879	-	-	-	Addition of NR test case 6.6.1.6-with gap non DRX SBI reading	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190880	-	-	-	CR to 38.533 annex for event triggered reporting test cases	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190881	-	-	-	Addition of EN-DC FR1 event triggered reporting test case 4.6.1.5	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190882	-	-	-	Addition of EN-DC FR1 event triggered reporting test case 4.6.1.6	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190883	-	-	-	Addition of EN-DC FR1 event triggered reporting test case 4.6.1.3	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190884	-	-	-	Addition of EN-DC FR1 event triggered reporting test case 4.6.1.4	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190885	-	-	-	Addition of default config for event triggered test cases	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190886	-	-	-	Introduction of 5G RRM TC 4.5.3.1	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190887	-	-	-	Introduction of 5G RRM TC 4.5.3.2	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190888	-	-	-	Introduction of 5G RRM TC 4.5.3.3	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190889	-	-	-	Introduction of 5G RRM TC 4.6.1.1	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190890	-	-	-	Introduction of 5G RRM TC 4.6.1.2	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190891	-	-	-	Introduction of 5G RRM TC 5.5.3.1	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190892	-	-	-	Introduction of 5G RRM TC 6.6.3.1	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190893	-	-	-	pCR for Addition of TC 6.5.1.3 NR SA FR1 RLM OOS in DRX	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190894	-	-	-	pCR for Addition of TC 6.4.3.1 NR SA FR1 TAA Accuracy	0.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-01	RAN5#4 5G-NR AH	R5-190895	-	-	-	pCR for Modification of TC 4.4.3.1 EN-DC FR1 TAA accuracy	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190896	-	-	-	pCR for Addition of TC 6.5.1.1 NR SA FR1 RLM OOS	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190897	-	-	-	pCR for Addition of TC 4.5.1.1 EN-DC FR1 RLM OOS	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190898	-	-	-	pCR for Addition of TC 4.5.1.3 EN-DC FR1 RLM OOS in DRX	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190899	-	-	-	Update to EN-DC FR1 transmit timing accuracy test	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190900	-	-	-	Addition of EN-DC FR1 RLM IS non-DRX test with SSB-based RLM RS	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190901	-	-	-	Addition of EN-DC FR1 RLM IS DRX test with SSB-based RLM RS	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190902	-	-	-	Addition of NR SA FR1 RLM IS non-DRX test with SSB-based RLM RS	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190903	-	-	-	Addition of NR SA FR1 RLM IS DRX test with SSB-based RLM RS	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190904	-	-	-	Correction of RRM 5G Test Cases 4.6.2 - EN-DC FR1-FR1 Inter-frequency measurements	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190905	-	-	-	Correction of RRM 5G Test Cases 6.6.2 - NR SA FR1-FR1 Inter-frequency measurements	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190906	-	-	-	Correction of RRM 5G Test Cases 7.6.2 - NR SA FR2-FR2 Inter-frequency measurements	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190907	-	-	-	Addition of RRM Test Cases 4.5.2.6: EN-DC FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190908	-	-	-	Addition of RRM Test Cases 5.5.2.1: EN-DC FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190909	-	-	-	Addition of RRM Test Cases 5.5.2.2: EN-DC FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190910	-	-	-	Addition of RRM Test Cases 5.5.2.3: EN-DC FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190911	-	-	-	Addition of RRM Test Cases 5.5.2.4: EN-DC FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190912	-	-	-	Addition of RRM Test Cases 5.5.2.5: EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190913	-	-	-	Addition of RRM Test Cases 5.5.2.6: EN-DC FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190914	-	-	-	Addition of RRM Test Cases 6.1.1.1: NR SA FR1 cell re-selection	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190915	-	-	-	Addition of RRM Test Cases 6.1.1.2: NR SA FR1-FR1 cell re-selection	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190916	-	-	-	Addition of cell re-selection to higher priority E-UTRAN test case 6.1.2.1	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190917	-	-	-	Addition of cell re-selection to lower priority E-UTRAN test case 6.1.2.2	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190918	-	-	-	Addition of SA NR to E-UTRAN handover test case 6.3.1.4	0.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-01	RAN5#4 5G-NR AH	R5-190919	-	-	-	Addition of SA NR to E-UTRAN handover test case 6.3.1.5	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190920	-	-	-	Addition of NR SA FR1 UE UL carrier RRC reconfiguration delay test case 6.5.4.1	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190921	-	-	-	Addition of NR SA FR1 CSI-RS based RLM out-of-sync non-DRX test case 6.5.1.5	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190922	-	-	-	Addition of NR SA FR1 CSI-RS based RLM in-sync non-DRX test case 6.5.1.6	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190923	-	-	-	Addition of NR SA FR1 CSI-RS based RLM out-of-sync in DRX test case 6.5.1.7	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190924	-	-	-	Addition of NR SA FR1 CSI-RS based RLM in-sync in DRX test case 6.5.1.8	0.2.0
2019-01	RAN5#4 5G-NR AH	R5-190987	-	-	-	38.533 Common Section updates to clarify leverage across architecture options	0.2.0
2019-03	RAN5#82	R5-191484	-	-	-	Correction Annex G	0.3.0
2019-03	RAN5#82	R5-191485	-	-	-	Correction NSA Options	0.3.0
2019-03	RAN5#82	R5-191486	-	-	-	Modifications NSA FR1 SS-RSRP tests	0.3.0
2019-03	RAN5#82	R5-191487	-	-	-	Modifications NSA FR1 SS-RSRQ tests	0.3.0
2019-03	RAN5#82	R5-191488	-	-	-	Modifications NSA FR1 L1-RSRP tests	0.3.0
2019-03	RAN5#82	R5-191489	-	-	-	Modifications SA FR1 SS-RSRP tests	0.3.0
2019-03	RAN5#82	R5-191490	-	-	-	Modifications SA FR1 SS-RSRQ tests	0.3.0
2019-03	RAN5#82	R5-191491	-	-	-	Modifications SA FR1 L1-RSRP tests	0.3.0
2019-03	RAN5#82	R5-191492	-	-	-	Addition NSA FR1 BWP switch tests	0.3.0
2019-03	RAN5#82	R5-191493	-	-	-	Addition SA FR1 BWP switch tests	0.3.0
2019-03	RAN5#82	R5-191494	-	-	-	Addition NSA FR2 BWP switch tests	0.3.0
2019-03	RAN5#82	R5-191495	-	-	-	Addition SA FR2 BWP switch tests	0.3.0
2019-03	RAN5#82	R5-191720	-	-	-	addition of cell mapping for BFD and measurement	0.3.0
2019-03	RAN5#82	R5-191924	-	-	-	Correction of default message contents for RRM	0.3.0
2019-03	RAN5#82	R5-191926	-	-	-	Addition of event-triggered reporting Test Cases to Cell configuration mapping in Annex E	0.3.0
2019-03	RAN5#82	R5-191930	-	-	-	Correction of 5G RRM Test Case 4.6.2.3	0.3.0
2019-03	RAN5#82	R5-191931	-	-	-	Correction of 5G RRM Test Case 4.6.2.4	0.3.0
2019-03	RAN5#82	R5-191934	-	-	-	Correction of 5G RRM Test Case 4.6.2.7	0.3.0
2019-03	RAN5#82	R5-191935	-	-	-	Correction of 5G RRM Test Case 4.6.2.8	0.3.0
2019-03	RAN5#82	R5-191936	-	-	-	Addition of Minimum conformance requirements 5.6.2.0	0.3.0
2019-03	RAN5#82	R5-191937	-	-	-	Correction of 5G RRM Test Case 5.6.2.1	0.3.0
2019-03	RAN5#82	R5-191938	-	-	-	Correction of 5G RRM Test Case 5.6.2.2	0.3.0
2019-03	RAN5#82	R5-191939	-	-	-	Correction of 5G RRM Test Case 5.6.2.3	0.3.0
2019-03	RAN5#82	R5-191940	-	-	-	Correction of 5G RRM Test Case 5.6.2.4	0.3.0
2019-03	RAN5#82	R5-191945	-	-	-	Addition of Minimum conformance requirements 7.6.2.0	0.3.0
2019-03	RAN5#82	R5-191946	-	-	-	Correction of 5G RRM Test Case 7.6.2.1	0.3.0
2019-03	RAN5#82	R5-191947	-	-	-	Correction of 5G RRM Test Case 7.6.2.2	0.3.0
2019-03	RAN5#82	R5-191948	-	-	-	Correction of 5G RRM Test Case 7.6.2.3	0.3.0
2019-03	RAN5#82	R5-191949	-	-	-	Correction of 5G RRM Test Case 7.6.2.4	0.3.0
2019-03	RAN5#82	R5-191950	-	-	-	Correction of 5G RRM Test Case 7.6.2.5	0.3.0
2019-03	RAN5#82	R5-191951	-	-	-	Correction of 5G RRM Test Case 7.6.2.6	0.3.0
2019-03	RAN5#82	R5-191952	-	-	-	Correction of 5G RRM Test Case 7.6.2.7	0.3.0
2019-03	RAN5#82	R5-191953	-	-	-	Correction of 5G RRM Test Case 7.6.2.8	0.3.0
2019-03	RAN5#82	R5-192062	-	-	-	Update of EN-DC FR1 event triggered reporting test case 4.6.1.6	0.3.0
2019-03	RAN5#82	R5-192063	-	-	-	Update of EN-DC FR1 event triggered reporting test case 4.6.1.3	0.3.0
2019-03	RAN5#82	R5-192064	-	-	-	Update of EN-DC FR1 event triggered reporting test case 4.6.1.4	0.3.0
2019-03	RAN5#82	R5-192221	-	-	-	Update on RRC_Connected generic procedure within RRM tests	0.3.0
2019-03	RAN5#82	R5-192477	-	-	-	Introduction of FR1 EN-DC Contention based random access Test case	0.3.0
2019-03	RAN5#82	R5-192478	-	-	-	Introduction of FR1 EN-DC non-Contention based random access Test case	0.3.0
2019-03	RAN5#82	R5-192479	-	-	-	Introduction of FR1 standalone Contention based random access Test case	0.3.0
2019-03	RAN5#82	R5-192480	-	-	-	Introduction of FR1 standalone Non-contention based random access Test case	0.3.0
2019-03	RAN5#82	R5-192481	-	-	-	Updated to 5G RRM TC 4.6.1.1	0.3.0
2019-03	RAN5#82	R5-192482	-	-	-	Updated to 5G RRM TC 4.6.1.2	0.3.0
2019-03	RAN5#82	R5-192483	-	-	-	Addition of NR test case 6.7.1.3.1-absolute RSRP	0.3.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-03	RAN5#82	R5-192484	-	-	-	Addition of NR test case 6.7.1.3.2-relative RSRP	0.3.0
2019-03	RAN5#82	R5-192485	-	-	-	Addition of NR test case 6.5.5.3 FR1 CSI-RS BFD nonDRX	0.3.0
2019-03	RAN5#82	R5-192486	-	-	-	Addition of NR test case 6.5.5.4 FR1 CSI-RS BFD DRX	0.3.0
2019-03	RAN5#82	R5-192487	-	-	-	Addition of NR test case 7.5.5.1 FR2 SSB BFD nonDRX	0.3.0
2019-03	RAN5#82	R5-192488	-	-	-	Addition of NR test case 7.5.5.2 FR2 SSB BFD DRX	0.3.0
2019-03	RAN5#82	R5-192489	-	-	-	Addition of NR test case 7.5.5.3 FR2 CSI-RS BFD nonDRX	0.3.0
2019-03	RAN5#82	R5-192490	-	-	-	Addition of NR test case 7.5.5.4 FR2 CSI-RS BFD DRX	0.3.0
2019-03	RAN5#82	R5-192492	-	-	-	Correction of 5G RRM Test Case 4.6.2.1	0.3.0
2019-03	RAN5#82	R5-192493	-	-	-	Correction of 5G RRM Test Case 4.6.2.2	0.3.0
2019-03	RAN5#82	R5-192494	-	-	-	Correction of 5G RRM Test Case 4.6.2.5	0.3.0
2019-03	RAN5#82	R5-192495	-	-	-	Correction of 5G RRM Test Case 4.6.2.6	0.3.0
2019-03	RAN5#82	R5-192496	-	-	-	Correction of 5G RRM Test Case 6.6.2.1	0.3.0
2019-03	RAN5#82	R5-192497	-	-	-	Correction of 5G RRM Test Case 6.6.2.2	0.3.0
2019-03	RAN5#82	R5-192498	-	-	-	Correction of 5G RRM Test Case 6.6.2.3	0.3.0
2019-03	RAN5#82	R5-192499	-	-	-	Correction of 5G RRM Test Case 6.6.2.4	0.3.0
2019-03	RAN5#82	R5-192500	-	-	-	Update of EN-DC FR1 event triggered reporting test case 4.6.1.5	0.3.0
2019-03	RAN5#82	R5-192503	-	-	-	Update to EN-DC FR1 transmit timing accuracy test	0.3.0
2019-03	RAN5#82	R5-192674	-	-	-	Update to EN-DC FR1 RLM IS non-DRX test with SSB-based RLM RS	0.3.0
2019-03	RAN5#82	R5-192675	-	-	-	Update to EN-DC FR1 RLM IS DRX test with SSB-based RLM RS	0.3.0
2019-03	RAN5#82	R5-192676	-	-	-	Update to NR SA FR1 RLM IS non-DRX test with SSB-based RLM RS	0.3.0
2019-03	RAN5#82	R5-192677	-	-	-	Update to NR SA FR1 RLM IS DRX test with SSB-based RLM RS	0.3.0
2019-03	RAN5#82	R5-192678	-	-	-	pCR for modification of TAAA TC for EN-DC FR1	0.3.0
2019-03	RAN#83	RP-190161	-	-	-	Presented to the RAN#83 plenary for 1-step approval	1.0.0
2019-03	RAN#83	-	-	-	-	Upgraded to Rel-15 with small editorial changes	15.0.0
2019-06	RAN#84	R5-193578	0100	-	F	Update the test case number of TC 4.3.2.2.2	15.1.0
2019-06	RAN#84	R5-193755	0102	-	F	Update of Minimum conformance requirements 6.6.1.0	15.1.0
2019-06	RAN#84	R5-193758	0104	-	F	Update of EN-DC RLM in-sync in non-DRX test case 4.5.1.6	15.1.0
2019-06	RAN#84	R5-193759	0105	-	F	Update of EN-DC RLM out-of-sync in DRX test case 4.5.1.7	15.1.0
2019-06	RAN#84	R5-193760	0106	-	F	Update of EN-DC RLM in-sync in DRX test case 4.5.1.8	15.1.0
2019-06	RAN#84	R5-193761	0107	-	F	Addition of Minimum conformance requirements 6.3.2	15.1.0
2019-06	RAN#84	R5-193762	0108	-	F	Addition of NR RRM TC 6.3.2.1.1-Intra Freq RRC Re-establishment	15.1.0
2019-06	RAN#84	R5-193763	0109	-	F	Addition of FR1-FR1 re-establishment test case 6.3.2.1.2	15.1.0
2019-06	RAN#84	R5-193764	0110	-	F	Addition of FR1 RRC connection release with redirection test case 6.3.2.3.1	15.1.0
2019-06	RAN#84	R5-193765	0111	-	F	Addition of FR1-E-UTRA RRC connection release with redirection test case 6.3.2.3.2	15.1.0
2019-06	RAN#84	R5-193766	0112	-	F	Update of TC 6.5.1.5 SA FR1 CSI-RS RLM OOS non-DRX	15.1.0
2019-06	RAN#84	R5-193767	0113	-	F	Update of TC 6.5.1.6 SA FR1 CSI-RS RLM IS non-DRX	15.1.0
2019-06	RAN#84	R5-193768	0114	-	F	Update of TC 6.5.1.7 SA FR1 CSI-RS RLM OOS DRX	15.1.0
2019-06	RAN#84	R5-193769	0115	-	F	Update of TC 6.5.1.8 SA FR1 CSI-RS RLM IS DRX	15.1.0
2019-06	RAN#84	R5-193770	0116	-	F	Addition of Minimum conformance requirements 6.5.5.0	15.1.0
2019-06	RAN#84	R5-193771	0117	-	F	Update of TC 6.5.5.3 SA FR1 CSI-RS BFD non-DRX	15.1.0
2019-06	RAN#84	R5-193772	0118	-	F	Update of TC 6.5.5.4 SA FR1 CSI-RS BFD DRX	15.1.0
2019-06	RAN#84	R5-193773	0119	-	F	Addition of Minimum conformance requirements 7.5.5.0	15.1.0
2019-06	RAN#84	R5-193774	0120	-	F	Update of TC 7.5.5.1 SA FR2 SSB BFD non-DRX	15.1.0
2019-06	RAN#84	R5-193775	0121	-	F	Update of TC 7.5.5.2 SA FR2 SSB BFD DRX	15.1.0
2019-06	RAN#84	R5-193776	0122	-	F	Update of TC 7.5.5.3 SA FR2 CSI-RS BFD non-DRX	15.1.0
2019-06	RAN#84	R5-193777	0123	-	F	Update of TC 7.5.5.4 SA FR2 CSI-RS BFD DRX	15.1.0
2019-06	RAN#84	R5-193778	0124	-	F	Addition of Minimum conformance requirements 7.6.1.0	15.1.0
2019-06	RAN#84	R5-193779	0125	-	F	Addition of 7.6.1.1 SA FR2 RRM measurement no-gap non-DRX	15.1.0
2019-06	RAN#84	R5-193780	0126	-	F	Addition of 7.6.1.2 SA FR2 RRM measurement no-gap DRX	15.1.0
2019-06	RAN#84	R5-193781	0127	-	F	Addition of 7.6.1.3 SA FR2 RRM measurement gap non-DRX	15.1.0
2019-06	RAN#84	R5-193782	0128	-	F	Addition of 7.6.1.4 SA FR2 RRM measurement gap DRX	15.1.0
2019-06	RAN#84	R5-193784	0130	-	F	Update of FR1 cell re-selection test case 6.1.1.1	15.1.0
2019-06	RAN#84	R5-193785	0131	-	F	Update of FR1-FR1 cell re-selection test case 6.1.1.2	15.1.0
2019-06	RAN#84	R5-193786	0132	-	F	Update of FR1-EUTRA higher priority cell re-selection test case 6.1.2.1	15.1.0
2019-06	RAN#84	R5-193787	0133	-	F	Update of FR1-EUTRA lower priority cell re-selection test case 6.1.2.2	15.1.0
2019-06	RAN#84	R5-193788	0134	-	F	Update of FR1-EUTRA handover known cell test case 6.3.1.4	15.1.0
2019-06	RAN#84	R5-193790	0136	-	F	Update of 6.6.1.1 SA FR1 RRM measurement no-gap non-DRX	15.1.0
2019-06	RAN#84	R5-193791	0137	-	F	Update of 6.6.1.2 SA FR1 RRM measurement no-gap DRX	15.1.0
2019-06	RAN#84	R5-193792	0138	-	F	Update of 6.6.1.3 SA FR1 RRM measurement gap non-DRX	15.1.0
2019-06	RAN#84	R5-193793	0139	-	F	Update of 6.6.1.4 SA FR1 RRM measurement gap DRX	15.1.0
2019-06	RAN#84	R5-193794	0140	-	F	Update of FR1 event-triggered without gap with SSB index test case 6.6.1.5	15.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-06	RAN#84	R5-193795	0141	-	F	Update of FR1 event-triggered with gap with SSB index test case 6.6.1.6	15.1.0
2019-06	RAN#84	R5-193812	0145	-	F	Addition of 6.3.2.2 minimum conformance requirements	15.1.0
2019-06	RAN#84	R5-193872	0146	-	F	Introduction of TC 4.5.5.4 EN-DC FR1 CSI-RS-based beam failure detection and link recovery in DRX	15.1.0
2019-06	RAN#84	R5-193949	0148	-	F	Correction of PRACH Configurations	15.1.0
2019-06	RAN#84	R5-194328	0153	-	F	Additional of new reference used in RRM test spec	15.1.0
2019-06	RAN#84	R5-194329	0154	-	F	Correction of reference spec number in RRM spec	15.1.0
2019-06	RAN#84	R5-194494	0165	-	F	Addition missing Editor's note 4.5.2.5	15.1.0
2019-06	RAN#84	R5-194549	0173	-	F	Correction of 5G RRM Test Case 5.6.2.1	15.1.0
2019-06	RAN#84	R5-194550	0174	-	F	Correction of 5G RRM Test Case 5.6.2.2	15.1.0
2019-06	RAN#84	R5-194551	0175	-	F	Correction of 5G RRM Test Case 5.6.2.3	15.1.0
2019-06	RAN#84	R5-194552	0176	-	F	Correction of 5G RRM Test Case 5.6.2.4	15.1.0
2019-06	RAN#84	R5-194553	0177	-	F	Correction of 5G RRM Test Case 5.6.2.5	15.1.0
2019-06	RAN#84	R5-194555	0179	-	F	Correction of 5G RRM Test Case 5.6.2.7	15.1.0
2019-06	RAN#84	R5-194556	0180	-	F	Correction of 5G RRM Test Case 5.6.2.8	15.1.0
2019-06	RAN#84	R5-194557	0181	-	F	Correction of Minimum conformance requirements 6.6.2.0	15.1.0
2019-06	RAN#84	R5-194562	0186	-	F	Correction of Minimum conformance requirements 7.6.2.0	15.1.0
2019-06	RAN#84	R5-194564	0188	-	F	Correction of 5G RRM Test Case 7.6.2.2	15.1.0
2019-06	RAN#84	R5-194565	0189	-	F	Correction of 5G RRM Test Case 7.6.2.3	15.1.0
2019-06	RAN#84	R5-194566	0190	-	F	Correction of 5G RRM Test Case 7.6.2.4	15.1.0
2019-06	RAN#84	R5-194567	0191	-	F	Correction of 5G RRM Test Case 7.6.2.5	15.1.0
2019-06	RAN#84	R5-194568	0192	-	F	Correction of 5G RRM Test Case 7.6.2.6	15.1.0
2019-06	RAN#84	R5-194569	0193	-	F	Correction of 5G RRM Test Case 7.6.2.7	15.1.0
2019-06	RAN#84	R5-194570	0194	-	F	Correction of 5G RRM Test Case 7.6.2.8	15.1.0
2019-06	RAN#84	R5-194571	0195	-	F	Correction of Minimum conformance requirements 7.3.2.1.0	15.1.0
2019-06	RAN#84	R5-194572	0196	-	F	Correction of 5G RRM Test Case 7.3.2.1.1	15.1.0
2019-06	RAN#84	R5-194573	0197	-	F	Correction of 5G RRM Test Case 7.3.2.1.2	15.1.0
2019-06	RAN#84	R5-194700	0208	-	F	Clean-up in EN-DC FR1 transmit timing accuracy test	15.1.0
2019-06	RAN#84	R5-194702	0210	-	F	Update to EN-DC FR1 RLM IS DRX test with SSB-based RLM RS	15.1.0
2019-06	RAN#84	R5-194703	0211	-	F	Update to NR SA FR1 RLM IS non-DRX test with SSB-based RLM RS	15.1.0
2019-06	RAN#84	R5-194704	0212	-	F	Update to NR SA FR1 RLM IS DRX test with SSB-based RLM RS	15.1.0
2019-06	RAN#84	R5-194710	0214	-	F	Update to E-UTRA configuration for RRM EN-DC tests to align with core spec update	15.1.0
2019-06	RAN#84	R5-194713	0216	-	F	Update to EN-DC FR1 RLM IS DRX test with SSB-based RLM RS	15.1.0
2019-06	RAN#84	R5-195013	0156	1	F	Updated to EN-DC FR1 RRM tests in clause 4.5.3	15.1.0
2019-06	RAN#84	R5-195016	0198	1	F	Test tolerance and measurement uncertainty in Annex F for Inter-Freq measurement test cases	15.1.0
2019-06	RAN#84	R5-195017	0129	1	F	Addition of default configuration in Annex H	15.1.0
2019-06	RAN#84	R5-195018	0143	1	F	Update of 6.3.2.2.1 random access	15.1.0
2019-06	RAN#84	R5-195019	0144	1	F	Update of 6.3.2.2.2 non-contention random access	15.1.0
2019-06	RAN#84	R5-195020	0151	1	F	Updated to EN-DC FR1 RRM tests in clause 4.6.1	15.1.0
2019-06	RAN#84	R5-195021	0207	1	F	Modification of EN-DC FR1 TAAA	15.1.0
2019-06	RAN#84	R5-195024	0199	1	F	Modification of EN-DC FR1 SSB RLM OOS in non-DRX	15.1.0
2019-06	RAN#84	R5-195025	0200	1	F	Modification of EN-DC FR1 SSB RLM OOS in DRX	15.1.0
2019-06	RAN#84	R5-195026	0201	1	F	Modification of NR SA FR1 TAAA	15.1.0
2019-06	RAN#84	R5-195027	0202	1	F	Modification of SA FR1 SSB RLM OOS in non-DRX	15.1.0
2019-06	RAN#84	R5-195028	0203	1	F	Modification of SA FR1 SSB RLM OOS in DRX	15.1.0
2019-06	RAN#84	R5-195029	0204	1	F	Modification of EN-DC FR2 TAAA	15.1.0
2019-06	RAN#84	R5-195030	0205	1	F	Modification of EN-DC FR2 SSB RLM OOS in non-DRX	15.1.0
2019-06	RAN#84	R5-195031	0206	1	F	Modification of EN-DC FR2 SSB RLM OOS in DRX	15.1.0
2019-06	RAN#84	R5-195032	0219	1	F	Update to EN-DC FR2 RLM IS non-DRX test with SSB-based RLM RS	15.1.0
2019-06	RAN#84	R5-195033	0220	1	F	Update to EN-DC FR2 RLM IS DRX test with SSB-based RLM RS	15.1.0
2019-06	RAN#84	R5-195034	0221	1	F	Addition of EN-DC FR2 Transmit Timing Accuracy tests	15.1.0
2019-06	RAN#84	R5-195035	0209	1	F	Update to EN-DC FR1 RLM IS non-DRX test with SSB-based RLM RS	15.1.0
2019-06	RAN#84	R5-195036	0150	1	F	Correction to EN-DC FR1 UE transmit timing accuracy TC 4.4.1.1	15.1.0
2019-06	RAN#84	R5-195037	0155	1	F	Updated to cell configuration mapping table for RRM tests	15.1.0
2019-06	RAN#84	R5-195038	0147	1	F	Introduction of TC 6.5.2.1 NR SA FR1 interruptions during measurements on deactivated NR SCC	15.1.0
2019-06	RAN#84	R5-195039	0178	1	F	Correction of 5G RRM Test Case 5.6.2.6	15.1.0
2019-06	RAN#84	R5-195040	0166	1	F	Correction of default message content for RRM in Annex H	15.1.0
2019-06	RAN#84	R5-195041	0217	1	F	Update to NR SA FR1 RLM IS non-DRX test with SSB-based RLM RS	15.1.0
2019-06	RAN#84	R5-195042	0218	1	F	Update to NR SA FR1 RLM IS DRX test with SSB-based RLM RS	15.1.0
2019-06	RAN#84	R5-195043	0215	1	F	Update to EN-DC FR1 RLM IS non-DRX test with SSB-based RLM RS	15.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-06	RAN#84	R5-195044	0187	1	F	Correction of 5G RRM Test Case 7.6.2.1	15.1.0
2019-06	RAN#84	R5-195045	0103	1	F	Update of EN-DC RLM out-of-sync in non-DRX test case 4.5.1.5	15.1.0
2019-06	RAN#84	R5-195099	0223	-	F	RRM implementation of FR2 UL demod OTA tests using single pol Rx TE	15.1.0
2019-06	RAN#84	R5-195173	0167	1	F	Correction of Minimum conformance requirements 4.6.2.0	15.1.0
2019-06	RAN#84	R5-195174	0168	1	F	Correction of 5G RRM Test Case 4.6.2.1 with FR1 Test tolerance	15.1.0
2019-06	RAN#84	R5-195175	0169	1	F	Correction of 5G RRM Test Case 4.6.2.2 with FR1 Test tolerance	15.1.0
2019-06	RAN#84	R5-195176	0170	1	F	Correction of 5G RRM Test Case 4.6.2.3 with FR1 Test tolerance	15.1.0
2019-06	RAN#84	R5-195177	0171	1	F	Correction of 5G RRM Test Case 4.6.2.4 with FR1 Test tolerance	15.1.0
2019-06	RAN#84	R5-195179	0172	1	F	Correction of Minimum conformance requirements 5.6.2.0	15.1.0
2019-06	RAN#84	R5-195182	0142	1	F	Addition of FR1-E-UTRAN event-triggered reporting in DRX test case 6.6.3.2	15.1.0
2019-06	RAN#84	R5-195185	0158	1	F	Update of FR1 Test tolerance and uncertainties in AnnexF	15.1.0
2019-06	RAN#84	R5-195186	0182	1	F	Correction of 5G RRM Test Case 6.6.2.1 with FR1 Test tolerance	15.1.0
2019-06	RAN#84	R5-195187	0183	1	F	Correction of 5G RRM Test Case 6.6.2.2 with FR1 Test tolerance	15.1.0
2019-06	RAN#84	R5-195188	0184	1	F	Correction of 5G RRM Test Case 6.6.2.3 with FR1 Test tolerance	15.1.0
2019-06	RAN#84	R5-195189	0185	1	F	Correction of 5G RRM Test Case 6.6.2.4 with FR1 Test tolerance	15.1.0
2019-06	RAN#84	R5-195445	0152	2	F	Updated to SA FR1 RRM tests in clause 6.6.3	15.1.0
2019-06	RAN#84	-	-	-	-	Administrative release upgrade to match the release of 3GPP TS 38.508-1 and TS 38.521-1 which were upgraded at RAN#84 to Rel-16 due to Rel-16 relevant CR(s)	16.0.0
2019-09	RAN#85	R5-195563	0228	-	F	Addition of 5.6.1.0 minimum requirements	16.1.0
2019-09	RAN#85	R5-195568	0233	-	F	Update of 6.1.1.2 inter-freq cell re-selection	16.1.0
2019-09	RAN#85	R5-195569	0234	-	F	Update of 6.1.2.1 inter-RAT cell re-selection to higher priority	16.1.0
2019-09	RAN#85	R5-195571	0236	-	F	Update of 6.3.1.4 inter-RAT handover to known cell	16.1.0
2019-09	RAN#85	R5-195573	0238	-	F	Update Test Tolerance of 6.3.2.1.1 intra-freq RRC re-establishment	16.1.0
2019-09	RAN#85	R5-195574	0239	-	F	Update Test Tolerance of 6.3.2.1.2 inter-freq RRC re-establishment	16.1.0
2019-09	RAN#85	R5-195575	0240	-	F	Update Test Tolerance of 6.3.2.3.1 NR RRC redirection	16.1.0
2019-09	RAN#85	R5-195576	0241	-	F	Update Test Tolerance of 6.3.2.3.2 inter-RAT RRC redirection	16.1.0
2019-09	RAN#85	R5-195577	0242	-	F	Update of 6.5.1.5 RLM out-of-sync non-DRX	16.1.0
2019-09	RAN#85	R5-195578	0243	-	F	Update of 6.5.1.6 RLM in-sync non-DRX	16.1.0
2019-09	RAN#85	R5-195579	0244	-	F	Update of 6.5.1.7 RLM out-of-sync in DRX	16.1.0
2019-09	RAN#85	R5-195580	0245	-	F	Update of 6.5.1.8 RLM in-sync in DRX	16.1.0
2019-09	RAN#85	R5-195581	0246	-	F	Update of 6.5.5.3 CSI-RS-based BFD non-DRX	16.1.0
2019-09	RAN#85	R5-195582	0247	-	F	Update of 6.5.5.4 CSI-RS-based BFD in DRX	16.1.0
2019-09	RAN#85	R5-195596	0248	-	F	Addition of minimum conformance requirements for FR2 EN-DC CSI-RS based RLM	16.1.0
2019-09	RAN#85	R5-195601	0253	-	F	Addition of minimum conformance requirements for FR2 EN-DC CSI-RS based BFD	16.1.0
2019-09	RAN#85	R5-195604	0256	-	F	Addition of minimum conformance requirements for SA FR2 reselection	16.1.0
2019-09	RAN#85	R5-195605	0257	-	F	Addition of NR test case 7.1.1.1-intra freq reselection	16.1.0
2019-09	RAN#85	R5-195606	0258	-	F	Addition of NR test case 7.1.1.2-inter freq reselection	16.1.0
2019-09	RAN#85	R5-195608	0260	-	F	Addition of NR test case 8.4.2.1-without SBI non-DRX	16.1.0
2019-09	RAN#85	R5-195609	0261	-	F	Addition of NR test case 8.4.2.2-without SBI DRX	16.1.0
2019-09	RAN#85	R5-195610	0262	-	F	Addition of NR test case 8.4.2.3-with SBI non-DRX	16.1.0
2019-09	RAN#85	R5-195611	0263	-	F	Addition of NR test case 8.4.2.4-with SBI DRX	16.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-09	RAN#85	R5-195612	0264	-	F	Addition of minimum conformance requirements for FR1 EN-DC CSI-RS based RLM	16.1.0
2019-09	RAN#85	R5-195623	0275	-	F	Correction of NR test case 5.5.2.1-interruption transition DRX sync	16.1.0
2019-09	RAN#85	R5-195624	0276	-	F	Correction of NR test case 5.5.2.2-interruption transition DRX async	16.1.0
2019-09	RAN#85	R5-195625	0277	-	F	Correction of NR test case 5.5.2.3-interruption NR deactivated SCell sync	16.1.0
2019-09	RAN#85	R5-195626	0278	-	F	Correction of NR test case 5.5.2.4-interruption NR deactivated SCell async	16.1.0
2019-09	RAN#85	R5-195627	0279	-	F	Correction of NR test case 5.5.2.5-interruption LTE deactivated SCell sync	16.1.0
2019-09	RAN#85	R5-195628	0280	-	F	Correction of NR test case 5.5.2.6-interruption LTE deactivated SCell async	16.1.0
2019-09	RAN#85	R5-195629	0281	-	F	Correction of NR test case 7.5.5.1-SSB BFD non-DRX	16.1.0
2019-09	RAN#85	R5-195630	0282	-	F	Correction of NR test case 7.5.5.2-SSB BFD DRX	16.1.0
2019-09	RAN#85	R5-195631	0283	-	F	Correction of NR test case 7.5.5.3-CSI-RS BFD non-DRX	16.1.0
2019-09	RAN#85	R5-195632	0284	-	F	Correction of NR test case 7.5.5.4-CSI-RS BFD DRX	16.1.0
2019-09	RAN#85	R5-195633	0285	-	F	Correction of NR test case 7.6.1.1-without gap non-DRX	16.1.0
2019-09	RAN#85	R5-195634	0286	-	F	Correction of NR test case 7.6.1.2-without gap DRX	16.1.0
2019-09	RAN#85	R5-195636	0288	-	F	Correction of NR test case 7.6.1.4-with gap DRX	16.1.0
2019-09	RAN#85	R5-196140	0295	-	F	Update NR operating band groups	16.1.0
2019-09	RAN#85	R5-196250	0296	-	F	Correction to EN-DC FR1 event-triggered reporting without gap TC 4.6.1.1 and 4.6.1.2	16.1.0
2019-09	RAN#85	R5-196503	0301	-	F	Updated to EN-DC FR1 RRM tests in clause 4.5.3	16.1.0
2019-09	RAN#85	R5-196504	0302	-	F	Updated to EN-DC FR2 RRM tests in clause 5.5.3	16.1.0
2019-09	RAN#85	R5-196547	0304	-	F	Update of FR1 Test tolerance and uncertainties in AnnexF	16.1.0
2019-09	RAN#85	R5-196601	0306	-	F	Correction of the reference for test frequencies and test mode - Chapter 4	16.1.0
2019-09	RAN#85	R5-196602	0307	-	F	Correction of the reference for test frequencies and test mode - Chapter 6	16.1.0
2019-09	RAN#85	R5-196603	0308	-	F	Editorial Corrections to section 5.5	16.1.0
2019-09	RAN#85	R5-196659	0309	-	F	Editorial corrections of Annex A	16.1.0
2019-09	RAN#85	R5-196660	0310	-	F	Correction of RRM Test Case 7.3.2.1.1	16.1.0
2019-09	RAN#85	R5-196661	0311	-	F	Correction of RRM Test Case 7.3.2.1.2	16.1.0
2019-09	RAN#85	R5-196662	0312	-	F	Correction of cell configuration mapping for RRM Test Cases in Annex E.3	16.1.0
2019-09	RAN#85	R5-196666	0316	-	F	Correction of RRM Test Case 5.6.2.1	16.1.0
2019-09	RAN#85	R5-196667	0317	-	F	Correction of RRM Test Case 5.6.2.2	16.1.0
2019-09	RAN#85	R5-196668	0318	-	F	Correction of RRM Test Case 5.6.2.3	16.1.0
2019-09	RAN#85	R5-196669	0319	-	F	Correction of RRM Test Case 5.6.2.4	16.1.0
2019-09	RAN#85	R5-196670	0320	-	F	Correction of RRM Test Case 5.6.2.5	16.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-09	RAN#85	R5-196671	0321	-	F	Correction of RRM Test Case 5.6.2.6	16.1.0
2019-09	RAN#85	R5-196672	0322	-	F	Correction of RRM Test Case 5.6.2.7	16.1.0
2019-09	RAN#85	R5-196673	0323	-	F	Correction of RRM Test Case 5.6.2.8	16.1.0
2019-09	RAN#85	R5-196674	0324	-	F	Addition of minimum conformance requirements for L1-RSRP measurement RRM FR1 test cases	16.1.0
2019-09	RAN#85	R5-196675	0325	-	F	Addition of SSB based L1-RSRP measurement RRM test case 4.6.3.1	16.1.0
2019-09	RAN#85	R5-196676	0326	-	F	Addition of SSB based L1-RSRP measurement RRM test case 4.6.3.2	16.1.0
2019-09	RAN#85	R5-196677	0327	-	F	Addition of CSI-RS based L1-RSRP measurement RRM test case 4.6.3.3	16.1.0
2019-09	RAN#85	R5-196679	0329	-	F	Addition of minimum conformance requirements for L1-RSRP measurement RRM FR2 test cases	16.1.0
2019-09	RAN#85	R5-196680	0330	-	F	Addition of SSB based L1-RSRP measurement RRM test case 5.6.3.1	16.1.0
2019-09	RAN#85	R5-196681	0331	-	F	Addition of SSB based L1-RSRP measurement RRM test case 5.6.3.2	16.1.0
2019-09	RAN#85	R5-196682	0332	-	F	Addition of CSI-RS based L1-RSRP measurement RRM test case 5.6.3.3	16.1.0
2019-09	RAN#85	R5-196735	0334	-	F	Editorial to fix conversion issues with two equations	16.1.0
2019-09	RAN#85	R5-196736	0335	-	F	Adding Chapter 8	16.1.0
2019-09	RAN#85	R5-196737	0336	-	F	New test 4.5.7.1	16.1.0
2019-09	RAN#85	R5-196738	0337	-	F	New test 4.5.5.1	16.1.0
2019-09	RAN#85	R5-196739	0338	-	F	New test 4.5.5.2	16.1.0
2019-09	RAN#85	R5-196740	0339	-	F	New test 4.7.3.1	16.1.0
2019-09	RAN#85	R5-196741	0340	-	F	New test 4.7.3.2	16.1.0
2019-09	RAN#85	R5-196742	0341	-	F	New test 6.7.3.1	16.1.0
2019-09	RAN#85	R5-196743	0342	-	F	New test 6.7.3.2	16.1.0
2019-09	RAN#85	R5-196925	0351	-	F	Modification of EN-DC FR2 TAAA Section 5.4.3.1	16.1.0
2019-09	RAN#85	R5-196943	0360	-	F	Addition of CSI-RS based L1-RSRP measurement RRM test case 5.6.3.4	16.1.0
2019-09	RAN#85	R5-197361	0357	1	F	Modification of SA FR1 TAAA Section 6.4.3.1	16.1.0
2019-09	RAN#85	R5-197364	0290	1	F	Update of NR UE Tx Timing Accuracy Test	16.1.0
2019-09	RAN#85	R5-197366	0235	1	F	Update Test Tolerance of 6.1.2.2 inter-RAT cell re-selection to lower priority	16.1.0
2019-09	RAN#85	R5-197396	0346	1	F	Update NSA Event trigger reporting test case	16.1.0
2019-09	RAN#85	R5-197397	0352	1	F	Modification of EN-DC FR2 SSB-RLM OOS Section 5.5.1.1	16.1.0
2019-09	RAN#85	R5-197398	0353	1	F	Modification of EN-DC FR2 SSB-RLM OOS in DRX Section 5.5.1.3	16.1.0
2019-09	RAN#85	R5-197399	0354	1	F	Modification of Synchronous EN-DC FR2 RRC DL BWP Switch in non-DRX Section 5.5.6.2.1	16.1.0
2019-09	RAN#85	R5-197400	0355	1	F	Modification of SA FR1 Handover with unknown Target Cell Section 6.3.1.2	16.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-09	RAN#85	R5-197401	0356	1	F	Modification of SA FR1-FR1 Handover with unknown Target Cell Section 6.3.1.3	16.1.0
2019-09	RAN#85	R5-197402	0224	1	F	Update of 4.6.1.3 event with gap non-DRX	16.1.0
2019-09	RAN#85	R5-197403	0225	1	F	Update of 4.6.1.4 event with gap in DRX	16.1.0
2019-09	RAN#85	R5-197404	0226	1	F	Update of 4.6.1.5 event without gap with ssb index	16.1.0
2019-09	RAN#85	R5-197405	0227	1	F	Update of 4.6.1.6 event with gap with ssb index	16.1.0
2019-09	RAN#85	R5-197406	0314	1	F	Correction of 5G RRM Inter Frequency measurements EN-DC test cases	16.1.0
2019-09	RAN#85	R5-197407	0229	1	F	Addition of 5.6.1.1 event without gap non-DRX	16.1.0
2019-09	RAN#85	R5-197408	0230	1	F	Addition of 5.6.1.2 event without gap in DRX	16.1.0
2019-09	RAN#85	R5-197409	0231	1	F	Addition of 5.6.1.3 event with gap non-DRX	16.1.0
2019-09	RAN#85	R5-197410	0232	1	F	Addition of 5.6.1.4 event with gap in DRX	16.1.0
2019-09	RAN#85	R5-197411	0249	1	F	Addition of NR test case 5.5.1.5-CSI-RS RLM OOS non-DRX	16.1.0
2019-09	RAN#85	R5-197412	0250	1	F	Addition of NR test case 5.5.1.6-CSI-RS RLM IS non-DRX	16.1.0
2019-09	RAN#85	R5-197413	0251	1	F	Addition of NR test case 5.5.1.7-CSI-RS RLM OOS DRX	16.1.0
2019-09	RAN#85	R5-197414	0252	1	F	Addition of NR test case 5.5.1.8-CSI-RS RLM IS DRX	16.1.0
2019-09	RAN#85	R5-197415	0254	1	F	Addition of NR test case 5.5.5.3-CSI-RS BFD non-DRX	16.1.0
2019-09	RAN#85	R5-197416	0255	1	F	Addition of NR test case 5.5.5.4-CSI-RS BFD DRX	16.1.0
2019-09	RAN#85	R5-197417	0259	1	F	Addition of minimum conformance requirements for inter-RAT NR measurements	16.1.0
2019-09	RAN#85	R5-197418	0289	1	F	Correction of default configuration in annex H	16.1.0
2019-09	RAN#85	R5-197419	0303	1	F	Updated to cell configuration mapping table for RRM tests	16.1.0
2019-09	RAN#85	R5-197420	0313	1	F	Correction of default message content for RRM in Annex H	16.1.0
2019-09	RAN#85	R5-197422	0305	1	F	Clarification on NE-DC tests for RRM	16.1.0
2019-09	RAN#85	R5-197423	0343	1	F	Addition RRM FR2 test setups into TS 38.533	16.1.0
2019-09	RAN#85	R5-197424	0345	1	F	Update TDD UL-DL Config based on TS 38.133	16.1.0
2019-09	RAN#85	R5-197425	0347	1	F	Modification of EN-DC FR1 UE Transmit Timing Section 4.4.1.1	16.1.0
2019-09	RAN#85	R5-197426	0265	1	F	Correction of NR test case 4.5.1.5-CSI-RS RLM OOS non-DRX	16.1.0
2019-09	RAN#85	R5-197427	0266	1	F	Correction of NR test case 4.5.1.6-CSI-RS RLM IS non-DRX	16.1.0
2019-09	RAN#85	R5-197428	0267	1	F	Correction of NR test case 4.5.1.7-CSI-RS RLM OOS DRX	16.1.0
2019-09	RAN#85	R5-197429	0268	1	F	Correction of NR test case 4.5.1.8-CSI-RS RLM IS DRX	16.1.0
2019-09	RAN#85	R5-197430	0269	1	F	Correction of NR test case 4.5.2.1-interruption transition DRX sync	16.1.0
2019-09	RAN#85	R5-197431	0270	1	F	Correction of NR test case 4.5.2.2-interruption transition DRX async	16.1.0
2019-09	RAN#85	R5-197432	0271	1	F	Correction of NR test case 4.5.2.3-interruption NR deactivated SCell sync	16.1.0
2019-09	RAN#85	R5-197433	0272	1	F	Correction of NR test case 4.5.2.4-interruption NR deactivated SCell async	16.1.0
2019-09	RAN#85	R5-197434	0273	1	F	Correction of NR test case 4.5.2.5-interruption LTE deactivated SCell sync	16.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-09	RAN#85	R5-197435	0274	1	F	Correction of NR test case 4.5.2.6-interruption LTE deactivated SCell async	16.1.0
2019-09	RAN#85	R5-197436	0328	1	F	Addition of CSI-RS based L1-RSRP measurement RRM test case 4.6.3.4	16.1.0
2019-09	RAN#85	R5-197437	0315	1	F	Correction of 5G RRM Inter Frequency measurements SA test cases	16.1.0
2019-09	RAN#85	R5-197570	0294	1	F	Annex E and F FR1 Test tolerance update for SS-RSRP	16.1.0
2019-09	RAN#85	R5-197584	0344	1	F	Addition Annex for RRM OTA procedures in TS 38.533	16.1.0
2019-09	RAN#85	R5-197607	0287	1	F	Correction of NR test case 7.6.1.3-with gap non-DRX.	16.1.0
2019-09	RAN#85	R5-197611	0237	1	F	Update of 6.3.1.5 inter-RAT handover to unknown cell	16.1.0
2019-09	RAN#85	R5-197612	0291	1	F	Update of SSB-based RLM in-sync test cases	16.1.0
2019-09	RAN#85	R5-197624	0297	1	F	Correction to PRACH configurations for FR1	16.1.0
2019-09	RAN#85	R5-197651	0348	2	F	Modification of EN-DC FR1 TAAA Section 4.4.3.1	16.1.0
2019-09	RAN#85	R5-197652	0349	2	F	Modification of EN-DC FR1 SSB-RLM OOS Section 4.5.1.1	16.1.0
2019-09	RAN#85	R5-197653	0350	2	F	Modification of EN-DC FR1 SSB-RLM OOS DRX Section 4.5.1.3	16.1.0
2019-09	RAN#85	R5-197654	0358	2	F	Modification of SA FR1 SSB RLM OOS in non-DRX Section 6.5.1.1	16.1.0
2019-09	RAN#85	R5-197655	0359	2	F	Modification of SA FR1 SSB RLM OOS in DRX Section 6.5.1.3	16.1.0
2019-09	RAN#85	R5-197656	0292	2	F	FR1 Test tolerance update for SS-RSRP NSA FR1 test cases	16.1.0
2019-09	RAN#85	R5-197657	0300	2	F	Correction to EN-DC FR1 radio link monitoring TC 4.5.1.1 and 4.5.1.2	16.1.0
2019-09	RAN#85	R5-197658	0293	2	F	FR1 Test tolerance update for SS-RSRP SA FR1 test cases	16.1.0
2019-12	RAN#86	R5-197794	0369	-	F	Update Test Tolerance of 4.5.2.1 interruptions active and non-active in sync	16.2.0
2019-12	RAN#86	R5-197795	0370	-	F	Update Test Tolerance of 4.5.2.2 interruptions active and non-active in async	16.2.0
2019-12	RAN#86	R5-197804	0379	-	F	Update Test Tolerance of 6.6.3.1 inter-RAT measurement non-DRX	16.2.0
2019-12	RAN#86	R5-197805	0380	-	F	Update Test Tolerance of 6.6.3.2 inter-RAT measurement DRX	16.2.0
2019-12	RAN#86	R5-197813	0382	-	F	Addition of minimum conformance requirements 5.5.5.0.1-SSB based BFD	16.2.0
2019-12	RAN#86	R5-197814	0383	-	F	Addition of minimum conformance requirements 8.2.1.0-inter-RAT reselection	16.2.0
2019-12	RAN#86	R5-197815	0384	-	F	Addition of minimum conformance requirements 8.3.1.0-inter-RAT handover	16.2.0
2019-12	RAN#86	R5-197816	0385	-	F	Addition of minimum conformance requirements 8.4.1.0-inter-RAT SFTD delay	16.2.0
2019-12	RAN#86	R5-197817	0386	-	F	Addition of minimum conformance requirements 8.5.1.0-inter-RAT SFTD accuracy	16.2.0
2019-12	RAN#86	R5-197820	0389	-	F	Addition of NR test case 8.2.1.1-high priority NR reselection	16.2.0
2019-12	RAN#86	R5-198029	0394	-	F	Update NSA SS-RSRP tests for 4Rx connection diagram	16.2.0
2019-12	RAN#86	R5-198032	0397	-	F	Align Annex D to TS 38.133	16.2.0
2019-12	RAN#86	R5-198289	0400	-	F	Correction of PRACH index in 6.1.1.1, 6.3.2.2.1 and 6.3.2.2.2	16.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-12	RAN#86	R5-198415	0404	-	F	Correction to NR SA FR1 timing advance adjustment accuracy TC 6.4.3.1	16.2.0
2019-12	RAN#86	R5-198416	0405	-	F	Correction to intra-frequency event-triggered reporting TC 6.6.1.1, 6.6.1.2, 6.6.1.3	16.2.0
2019-12	RAN#86	R5-198421	0410	-	F	Correction to FR1 SA random access test cases	16.2.0
2019-12	RAN#86	R5-198472	0412	-	F	Correct message contents for 5.6.2.x tests	16.2.0
2019-12	RAN#86	R5-198477	0416	-	F	Correction to Annex E	16.2.0
2019-12	RAN#86	R5-198518	0418	-	F	Update PUSCH symbol length as message exception in 6.4.1.1 in TS 38.533	16.2.0
2019-12	RAN#86	R5-198519	0419	-	F	Update 4.4.3.1 test requirements	16.2.0
2019-12	RAN#86	R5-198545	0420	-	F	Update 4.7.1.1.1 test requirements in TS 38.533	16.2.0
2019-12	RAN#86	R5-198549	0421	-	F	Updated to cell configuration mapping table for RRM tests	16.2.0
2019-12	RAN#86	R5-198550	0422	-	F	Minimum conformance requirements updated for 5G RRM Inter-RAT measurements tests	16.2.0
2019-12	RAN#86	R5-198551	0423	-	F	Minimum conformance requirements updated for 5G RRM SCell activation and deactivation delay tests	16.2.0
2019-12	RAN#86	R5-198558	0428	-	F	5G RRM Spec 3GPP style correction in clause 4 and 5	16.2.0
2019-12	RAN#86	R5-198572	0429	-	F	Correction of minimum conformance requirements 4.6.2.0	16.2.0
2019-12	RAN#86	R5-198575	0432	-	F	Correction of minimum conformance requirements 5.6.3.0	16.2.0
2019-12	RAN#86	R5-198577	0434	-	F	Correction of clause 3 definitions, symbols and abbreviations	16.2.0
2019-12	RAN#86	R5-198578	0435	-	F	Correction of RRM Test Case 4.6.3.1	16.2.0
2019-12	RAN#86	R5-198581	0438	-	F	Correction of RRM Test Case 4.6.3.4	16.2.0
2019-12	RAN#86	R5-198582	0439	-	F	Correction of RRM Test Case 5.6.2.1	16.2.0
2019-12	RAN#86	R5-198583	0440	-	F	Correction of RRM Test Case 5.6.2.2	16.2.0
2019-12	RAN#86	R5-198584	0441	-	F	Correction of RRM Test Case 5.6.2.3	16.2.0
2019-12	RAN#86	R5-198585	0442	-	F	Correction of RRM Test Case 5.6.2.4	16.2.0
2019-12	RAN#86	R5-198586	0443	-	F	Correction of RRM Test Case 5.6.2.5	16.2.0
2019-12	RAN#86	R5-198587	0444	-	F	Correction of RRM Test Case 5.6.2.6	16.2.0
2019-12	RAN#86	R5-198588	0445	-	F	Correction of RRM Test Case 5.6.2.7	16.2.0
2019-12	RAN#86	R5-198589	0446	-	F	Correction of RRM Test Case 5.6.2.8	16.2.0
2019-12	RAN#86	R5-198594	0451	-	F	Correction of RRM Test Case 7.6.2.1	16.2.0
2019-12	RAN#86	R5-198595	0452	-	F	Correction of RRM Test Case 7.6.2.2	16.2.0
2019-12	RAN#86	R5-198596	0453	-	F	Correction of RRM Test Case 7.6.2.3	16.2.0
2019-12	RAN#86	R5-198597	0454	-	F	Correction of RRM Test Case 7.6.2.4	16.2.0
2019-12	RAN#86	R5-198598	0455	-	F	Correction of RRM Test Case 7.6.2.5	16.2.0
2019-12	RAN#86	R5-198599	0456	-	F	Correction of RRM Test Case 7.6.2.6	16.2.0
2019-12	RAN#86	R5-198601	0458	-	F	Correction of RRM Test Case 7.6.2.8	16.2.0
2019-12	RAN#86	R5-198692	0471	-	F	Addition of RRM Test Case 6.6.4.1	16.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-12	RAN#86	R5-198693	0472	-	F	Addition of RRM Test Case 6.6.4.2	16.2.0
2019-12	RAN#86	R5-198694	0473	-	F	Addition of RRM Test Case 6.6.4.3	16.2.0
2019-12	RAN#86	R5-198695	0474	-	F	Addition of RRM Test Case 6.6.4.4	16.2.0
2019-12	RAN#86	R5-198696	0475	-	F	Addition of RRM Test Case 7.6.3.1	16.2.0
2019-12	RAN#86	R5-198697	0476	-	F	Addition of RRM Test Case 7.6.3.2	16.2.0
2019-12	RAN#86	R5-198698	0477	-	F	Addition of RRM Test Case 7.6.3.3	16.2.0
2019-12	RAN#86	R5-198699	0478	-	F	Addition of RRM Test Case 7.6.3.4	16.2.0
2019-12	RAN#86	R5-199364	0365	1	F	Update Test Tolerance of 4.5.1.5 RLM OOS non-DRX	16.2.0
2019-12	RAN#86	R5-199365	0367	1	F	Update Test Tolerance of 4.5.1.7 RLM OOS DRX	16.2.0
2019-12	RAN#86	R5-199366	0375	1	F	Update Test Tolerance of 6.5.1.5 SA RLM OOS non-DRX	16.2.0
2019-12	RAN#86	R5-199367	0377	1	F	Update Test Tolerance of 6.5.1.7 SA RLM OOS DRX	16.2.0
2019-12	RAN#86	R5-199368	0366	1	F	Update Test Tolerance of 4.5.1.6 RLM in-sync non-DRX	16.2.0
2019-12	RAN#86	R5-199369	0368	1	F	Update Test Tolerance of 4.5.1.8 RLM in-sync DRX	16.2.0
2019-12	RAN#86	R5-199370	0376	1	F	Update Test Tolerance of 6.5.1.6 SA RLM in-sync non-DRX	16.2.0
2019-12	RAN#86	R5-199371	0378	1	F	Update Test Tolerance of 6.5.1.8 SA RLM in-sync DRX	16.2.0
2019-12	RAN#86	R5-199379	0417	1	F	Update 4.4.1.1 test procedure in TS 38.533	16.2.0
2019-12	RAN#86	R5-199380	0479	1	F	Update 4.5.1.1 and 4.5.1.2 in TS 38.533	16.2.0
2019-12	RAN#86	R5-199381	0406	1	F	Correction to NR SA FR1 SS-RSRP absolute and relative measurement accuracy Intra-frequency measurements	16.2.0
2019-12	RAN#86	R5-199389	0402	1	F	Correction to NR SA Cell re-selection tests	16.2.0
2019-12	RAN#86	R5-199390	0436	1	F	Correction of RRM Test Case 4.6.3.2	16.2.0
2019-12	RAN#86	R5-199391	0437	1	F	Correction of RRM Test Case 4.6.3.3	16.2.0
2019-12	RAN#86	R5-199392	0387	1	F	Addition of NR test case 5.5.5.1-ENDC FR2 SSB BFD no-DRX	16.2.0
2019-12	RAN#86	R5-199393	0388	1	F	Addition of NR test case 5.5.5.2-ENDC FR2 SSB BFD DRX	16.2.0
2019-12	RAN#86	R5-199394	0431	1	F	Correction of minimum conformance requirements 5.6.2.0	16.2.0
2019-12	RAN#86	R5-199395	0395	1	F	Update SA SS-RSRP tests for 4Rx connection diagram	16.2.0
2019-12	RAN#86	R5-199396	0403	1	F	Correction to NR SA FR1 UE transmit timing accuracy TC 6.4.1.1	16.2.0
2019-12	RAN#86	R5-199397	0457	1	F	Correction of RRM Test Case 7.6.2.7	16.2.0
2019-12	RAN#86	R5-199398	0361	1	F	Add AoA Setup 4 for FR2 RRM Test cases	16.2.0
2019-12	RAN#86	R5-199399	0390	1	F	Addition of NR test case 8.3.1.1-known handover	16.2.0
2019-12	RAN#86	R5-199400	0391	1	F	Addition of NR test case 8.4.1.1-SFTD delay non-DRX	16.2.0
2019-12	RAN#86	R5-199401	0392	1	F	Addition of NR test case 8.4.1.2-SFTD delay DRX	16.2.0
2019-12	RAN#86	R5-199402	0393	1	F	Addition of NR test case 8.5.1.1-SFTD accuracy	16.2.0
2019-12	RAN#86	R5-199403	0396	1	F	Align Annex A to TS 38.133	16.2.0
2019-12	RAN#86	R5-199404	0413	1	F	Clean up RRM message contents in Annex H	16.2.0
2019-12	RAN#86	R5-199405	0424	1	F	New 5G RRM Inter-RAT measurement TC 8.4.2.5	16.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-12	RAN#86	R5-199406	0425	1	F	New 5G RRM Inter-RAT measurement TC 8.4.2.6	16.2.0
2019-12	RAN#86	R5-199407	0426	1	F	New 5G RRM Inter-RAT measurement TC 8.4.2.7	16.2.0
2019-12	RAN#86	R5-199408	0427	1	F	New 5G RRM Inter-RAT measurement TC 8.4.2.8	16.2.0
2019-12	RAN#86	R5-199409	0433	1	F	Correction of message content in Annex H	16.2.0
2019-12	RAN#86	R5-199436	0470	1	F	Introduction of n29 and n65 to 38.533	16.2.0
2019-12	RAN#86	R5-199499	0401	1	F	Correction to EN-DC FR1 UE transmit timing accuracy TC 4.4.1.1	16.2.0
2019-12	RAN#86	R5-199515	0381	1	F	Update Test Tolerance in Annex F	16.2.0
2019-12	RAN#86	R5-199517	0481	1	F	Update General parameters in test case 4.5.1.2	16.2.0
2019-12	RAN#86	R5-199533	0482	1	F	Update NSA FR2 RLM IS non-DRX test	16.2.0
2019-12	RAN#86	R5-199534	0483	1	F	Update NSA FR2 RLM IS test with DRX	16.2.0
2019-12	RAN#86	R5-199535	0484	1	F	Update NSA FR2 Timing Accuracy Test	16.2.0
2019-12	RAN#86	R5-199544	0399	1	F	Add applicable test methods for RRM FR2	16.2.0
2019-12	RAN#86	R5-199550	0463	1	F	Addition of NR SA FR1 Handover with known Target Cell Section 6.3.1.1	16.2.0
2019-12	RAN#86	R5-199551	0464	1	F	Modification of NR SA FR1 Handover with unknown Target Cell Section 6.3.1.2	16.2.0
2019-12	RAN#86	R5-199552	0465	1	F	Modification of NR SA FR1-FR1 Handover with unknown Target Cell Section 6.3.1.3	16.2.0
2019-12	RAN#86	R5-199583	0409	1	F	Correction to FR1 NSA random access test cases	16.2.0
2020-03	RAN#87	R5-200822	0544	-	F	Correction to Test Applicability for 4.3.2.2.2 Non-contention based random access test in FR1 for PSCell in EN-DC	16.3.0
2020-03	RAN#87	R5-200823	0545	-	F	Correction to SRS Configuration for 4.4.3.1 EN-DC FR1 timing advance adjustment accuracy	16.3.0
2020-03	RAN#87	R5-200829	0551	-	F	Correction to Message Exception for 4.6.1.5 EN-DC FR1 event-triggered reporting without gap in non-DRX with SSB time index detection	16.3.0
2020-03	RAN#87	R5-200833	0555	-	F	Correction to Test Applicability for 6.3.2.2.2 Non-Contention based random access test in FR1 for NR standalone	16.3.0
2020-03	RAN#87	R5-200834	0556	-	F	Correction to SRS Configuration for 6.4.3.1 NR SA FR1 timing advance adjustment accuracy	16.3.0
2020-03	RAN#87	R5-200839	0561	-	F	Correction to Message Exception for 6.6.1.5 NR SA FR1 event-triggered reporting without gap in non-DRX with SSB time index detection	16.3.0
2020-03	RAN#87	R5-200277	0488	-	F	Test tolerance update intra-frequency SS-SINR NSA	16.3.0
2020-03	RAN#87	R5-200278	0489	-	F	Test tolerance update inter-frequency SS-SINR NSA	16.3.0
2020-03	RAN#87	R5-200279	0490	-	F	Test tolerance update inter-frequency SS-RSRP SA	16.3.0
2020-03	RAN#87	R5-200281	0492	-	F	Test tolerance update inter-frequency SS-RSRQ SA	16.3.0
2020-03	RAN#87	R5-200282	0493	-	F	Test tolerance update intra-frequency SS-SINR SA	16.3.0
2020-03	RAN#87	R5-200283	0494	-	F	Test tolerance update inter-frequency SS-SINR SA	16.3.0
2020-03	RAN#87	R5-200306	0497	-	F	Reference SSB configuration correction	16.3.0
2020-03	RAN#87	R5-200421	0508	-	F	Correction to Active UL BWP for intra-frequency event triggered reporting with gap	16.3.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-03	RAN#87	R5-200422	0509	-	F	Correction to EN-DC FR1 event-triggered reporting test cases	16.3.0
2020-03	RAN#87	R5-200423	0510	-	F	Correction to FR1 NR SA E-UTRA cell re-selection test cases	16.3.0
2020-03	RAN#87	R5-200425	0512	-	F	Correction to NR SA FR1 SS-RSRP measurement accuracy tests	16.3.0
2020-03	RAN#87	R5-200427	0514	-	F	Correction to the simulated cell for cell-reselection test cases	16.3.0
2020-03	RAN#87	R5-200428	0515	-	F	Correction to UE transmit timing accuracy test case	16.3.0
2020-03	RAN#87	R5-200564	0524	-	F	Correction to Statistical testing of delay and UE measurement performance in RRM tests	16.3.0
2020-03	RAN#87	R5-200606	0526	-	F	Cell mapping update measurement tests Annex E	16.3.0
2020-03	RAN#87	R5-200607	0527	-	F	Re-submission R5-197804 not implemented	16.3.0
2020-03	RAN#87	R5-200608	0528	-	F	Corrections to SS-RSRP meas accuracy NSA tests	16.3.0
2020-03	RAN#87	R5-200610	0530	-	F	Correct message contents measurement tests	16.3.0
2020-03	RAN#87	R5-200705	0533	-	F	Correction to TC 6.1.1.2 FR1 inter-freq re-selection	16.3.0
2020-03	RAN#87	R5-200708	0536	-	F	Update of TC 6.3.2.3.1 FR1 RRC redirection	16.3.0
2020-03	RAN#87	R5-200709	0537	-	F	Update of TC 6.3.2.3.2 inter-freq RRC redirection	16.3.0
2020-03	RAN#87	R5-200785	0539	-	F	Update of EN-DC SSB-based RLM TC 4.5.1.1, 4.5.1.2, 4.5.1.3 and 4.5.1.4	16.3.0
2020-03	RAN#87	R5-200786	0540	-	F	Update of EN-DC CSI-RS-based RLM TC 4.5.1.5, 4.5.1.6, 4.5.1.7 and 4.5.1.8	16.3.0
2020-03	RAN#87	R5-200787	0541	-	F	Update of NR CSI-RS-based RLM TC 6.5.1.5, 6.5.1.6, 6.5.1.7 and 6.5.1.8	16.3.0
2020-03	RAN#87	R5-200818	0543	-	F	Correction to cell mapping Annex E	16.3.0
2020-03	RAN#87	R5-200858	0569	-	F	Corrections to Table H.3.1-8	16.3.0
2020-03	RAN#87	R5-200916	0538	1	F	Update to test applicability per permitted test method	16.3.0
2020-03	RAN#87	R5-200986	0507	1	F	Core alignment for event-triggered reporting test cases	16.3.0
2020-03	RAN#87	R5-200987	0534	1	F	Update of TC 6.3.2.1.1 FR1 RRC re-establishment	16.3.0
2020-03	RAN#87	R5-200988	0535	1	F	Update of TC 6.3.2.1.2 inter-freq RRC re-establishment	16.3.0
2020-03	RAN#87	R5-201030	0529	1	F	Corrections to SS-RSRP meas accuracy SA tests	16.3.0
2020-03	RAN#87	R5-201039	0485	1	F	Test tolerance update inter-frequency SS-RSRP NSA	16.3.0
2020-03	RAN#87	R5-201040	0486	1	F	Test tolerance update intra-frequency SS-RSRQ NSA	16.3.0
2020-03	RAN#87	R5-201041	0491	1	F	Test tolerance update intra-frequency SS-RSRQ SA	16.3.0
2020-03	RAN#87	R5-201056	0511	1	F	Correction to message contents in 6.6.1.5 and 6.6.1.6	16.3.0
2020-03	RAN#87	R5-201057	0513	1	F	Correction to test description of RRM TC 4.6.1.3 and 4.6.1.6	16.3.0
2020-03	RAN#87	R5-201058	0516	1	F	Update of maximum test system uncertainty for FR1 RRM Test	16.3.0
2020-03	RAN#87	R5-201063	0517	1	F	Update FR1 Test Tolerance of 4.5.2.3 interruptions on NR SCC in sync	16.3.0
2020-03	RAN#87	R5-201064	0518	1	F	Update FR1 Test Tolerance of 4.5.2.4 interruptions on NR SCC in async	16.3.0
2020-03	RAN#87	R5-201071	0552	1	F	Correction to Test Applicability for 4.6.2.2 EN-DC FR1-FR1 event-triggered reporting in DRX	16.3.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-03	RAN#87	R5-201072	0553	1	F	Correction to Test Applicability for 4.6.2.5 EN-DC FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection	16.3.0
2020-03	RAN#87	R5-201073	0554	1	F	Correction to Test Applicability for 4.6.2.6 EN-DC FR1-FR1 event-triggered reporting in DRX with SSB time index detection	16.3.0
2020-03	RAN#87	R5-201078	0562	1	F	Correction to Test Applicability for 6.6.2.1 NR SA FR1-FR1 event-triggered reporting in non-DRX	16.3.0
2020-03	RAN#87	R5-201080	0564	1	F	Correction to Test Applicability for 6.6.2.5 NR SA FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection	16.3.0
2020-03	RAN#87	R5-201081	0565	1	F	Correction to Test Applicability for 6.6.2.6 NR SA FR1-FR1 event-triggered reporting in DRX with SSB time index detection	16.3.0
2020-03	RAN#87	R5-201082	0571	1	F	Correction to Test Parameters for 4.6.1.1	16.3.0
2020-03	RAN#87	R5-201083	0572	1	F	Correction to Test Parameters for 4.6.1.2	16.3.0
2020-03	RAN#87	R5-201160	0531	1	F	Correct message contents event triggered measurement tests	16.3.0
2020-03	RAN#87	R5-201166	0567	1	F	Update RLM non DRX test cases	16.3.0
2020-03	RAN#87	R5-201167	0568	1	F	Update 4.5.1.4 test case	16.3.0
2020-03	RAN#87	R5-201168	0570	1	F	Clarification 4.4.1.1 test procedure	16.3.0
2020-03	RAN#87	R5-201169	0521	1	F	Update of FR1 Test Tolerance in Annex F	16.3.0
2020-03	RAN#87	R5-201190	0542	1	F	Update of NR SSB-based RLM TC 6.5.1.1, 6.5.1.2, 6.5.1.3 and 6.5.1.4	16.3.0
2020-03	RAN#87	R5-201240	0563	2	F	Correction to Test Applicability for 6.6.2.2 NA SA FR1-FR1 event-triggered reporting in DRX	16.3.0
2020-03	RAN#87	R5-201242	0532	2	F	Correction to Test Applicability for 4.6.2.1 EN-DC FR1-FR1 event-triggered reporting in non-DRX	16.3.0
2020-03	RAN#87	R5-200276	0487	-	F	Test tolerance update inter-frequency SS-RSRQ NSA	16.3.0
2020-03	RAN#87	R5-200284	0495	-	F	Test tolerance update measurement tests Annex F	16.3.0
2020-03	RAN#87	R5-201044	0496	-	F	Test Tolerance and Measurement Uncertainty in Annex F for L1-RSRP measurement test cases	16.3.0
2020-03	RAN#87	R5-201045	0499	1	F	Correction of RRM Test Case 4.6.3.1 including FR1 Test Tolerance	16.3.0
2020-03	RAN#87	R5-201046	0500	1	F	Correction of RRM Test Case 4.6.3.2 including FR1 Test Tolerance	16.3.0
2020-03	RAN#87	R5-201047	0501	1	F	Correction of RRM Test Case 4.6.3.3 including FR1 Test Tolerance	16.3.0
2020-03	RAN#87	R5-201048	0502	1	F	Correction of RRM Test Case 4.6.3.4 including FR1 Test Tolerance	16.3.0
2020-03	RAN#87	R5-201049	0503	1	F	Correction of RRM Test Case 6.6.4.1 including FR1 Test Tolerance	16.3.0
2020-03	RAN#87	R5-201050	0504	1	F	Correction of RRM Test Case 6.6.4.2 including FR1 Test Tolerance	16.3.0
2020-03	RAN#87	R5-201051	0505	1	F	Correction of RRM Test Case 6.6.4.3 including FR1 Test Tolerance	16.3.0
2020-03	RAN#87	R5-201052	0506	1	F	Correction of RRM Test Case 6.6.4.4 including FR1 Test Tolerance	16.3.0
2020-03	RAN#87	R5-201070	0548	1	F	Correction to Message Exception for 4.5.1.3 EN-DC FR1 radio link monitoring Out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode	16.3.0
2020-03	RAN#87	R5-201074	0557	1	F	Correction to Test Parameter for 6.5.1.1 NR SA FR1 radio link monitoring Out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	16.3.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-03	RAN#87	R5-201075	0558	1	F	Correction to Test Procedure for 6.5.1.2 NR SA FR1 radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode	16.3.0
2020-03	RAN#87	R5-201076	0559	1	F	Correction to Message Exception for 6.5.1.3 NR SA FR1 radio link monitoring Out-of-sync test for PSCell configured with SSB-based RLM RS in DRX mode	16.3.0
2020-03	RAN#87	R5-201077	0560	1	F	Correction to Message Exception for 6.5.1.4 NR SA FR1 radio link monitoring In-sync test for PSCell configured with SSB-based RLM RS in DRX mode	16.3.0
2020-03	RAN#87	R5-201105	0546	1	F	Correction to Test Parameters for 4.5.1.1 EN-DC FR1 radio link monitoring Out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	16.3.0
2020-03	RAN#87	R5-201106	0547	1	F	Correction to Test Procedure for 4.5.1.2 EN-DC FR1 radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	16.3.0
2020-06	RAN#88	R5-201395	0576	-	F	Correction to NR test case 7.7.1.3.2 SS-RSRP relative accuracy	16.4.0
2020-06	RAN#88	R5-201396	0577	-	F	Correction to NR test case 8.2.1.1 higher priority NR cell reselection	16.4.0
2020-06	RAN#88	R5-201398	0579	-	F	Correction to NR test case 8.4.1.1 SFTD non-DRX	16.4.0
2020-06	RAN#88	R5-201399	0580	-	F	Correction to NR test case 8.4.1.2 SFTD DRX	16.4.0
2020-06	RAN#88	R5-201400	0581	-	F	Correction to NR test case 8.4.2.1 event-triggered without SSB index non-DRX	16.4.0
2020-06	RAN#88	R5-201401	0582	-	F	Correction to NR test case 8.4.2.2 event-triggered without SSB index DRX	16.4.0
2020-06	RAN#88	R5-201402	0583	-	F	Correction to NR test case 8.4.2.3 event-triggered with SSB index non-DRX	16.4.0
2020-06	RAN#88	R5-201403	0584	-	F	Correction to NR test case 8.4.2.4 event-triggered with SSB index DRX	16.4.0
2020-06	RAN#88	R5-201404	0585	-	F	Correction to NR test case 8.5.1.1 SFTD accuracy	16.4.0
2020-06	RAN#88	R5-201405	0586	-	F	Addition to minimum conformance requirement 5.5.5.0.3 - scheduling restriction for BFD and CBD	16.4.0
2020-06	RAN#88	R5-201407	0588	-	F	Addition to minimum conformance requirement 5.5.8.0 - TCI-state switch	16.4.0
2020-06	RAN#88	R5-201408	0589	-	F	Addition to NR test case 5.5.8.1 MAC-CE based TCI switch	16.4.0
2020-06	RAN#88	R5-201409	0590	-	F	Addition to NR test case 5.5.8.2 RRC based TCI switch	16.4.0
2020-06	RAN#88	R5-201412	0593	-	F	Addition to minimum conformance requirements 7.5.1.0.5 - Scheduling restriction for RLM	16.4.0
2020-06	RAN#88	R5-201414	0595	-	F	Addition to minimum Conformance Requirements 7.5.6.1.0 - DCI-based DL active BWP switch	16.4.0
2020-06	RAN#88	R5-201415	0596	-	F	Addition to NR test case 7.5.6.1.3 FR2 DCI-based DL active BWP switch non-DRX	16.4.0
2020-06	RAN#88	R5-201619	0603	-	F	Corrections to 6.7.1.1	16.4.0
2020-06	RAN#88	R5-201676	0614	-	F	Correction to inter-freq measurement TCs for SSB configuration	16.4.0
2020-06	RAN#88	R5-201677	0615	-	F	Correction to TC 6.3.2.3.1 for the test procedure	16.4.0
2020-06	RAN#88	R5-201679	0617	-	F	Update of TC 5.6.1.1 event-triggered without gap non-DRX	16.4.0
2020-06	RAN#88	R5-201680	0618	-	F	Update of TC 5.6.1.2 event-triggered without gap DRX	16.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-06	RAN#88	R5-201681	0619	-	F	Update of TC 5.6.1.3 event-triggered with gap non-DRX	16.4.0
2020-06	RAN#88	R5-201682	0620	-	F	Update of TC 5.6.1.4 event-triggered with gap DRX	16.4.0
2020-06	RAN#88	R5-201686	0624	-	F	Update of TC 8.4.2.5 FR2 event-triggered without SSB index non-DRX	16.4.0
2020-06	RAN#88	R5-201687	0625	-	F	Update of TC 8.4.2.6 FR2 event-triggered without SSB index DRX	16.4.0
2020-06	RAN#88	R5-201688	0626	-	F	Update of TC 8.4.2.7 FR2 event-triggered with SSB index non-DRX	16.4.0
2020-06	RAN#88	R5-201689	0627	-	F	Update of TC 8.4.2.8 FR2 event-triggered with SSB index DRX	16.4.0
2020-06	RAN#88	R5-201821	0634	-	F	Correction of SS-SINR applicability -NSA	16.4.0
2020-06	RAN#88	R5-201822	0635	-	F	Correction of SS-SINR applicability -SA	16.4.0
2020-06	RAN#88	R5-201824	0637	-	F	Corrections to 4.7.1.1	16.4.0
2020-06	RAN#88	R5-202054	0644	-	F	Minimum Requirements SS-RSRP iRAT	16.4.0
2020-06	RAN#88	R5-202055	0645	-	F	Addition 8.5.2.1.1	16.4.0
2020-06	RAN#88	R5-202056	0646	-	F	Addition 8.5.2.1.2	16.4.0
2020-06	RAN#88	R5-202057	0647	-	F	Minimum Requirements SS-RSRQ iRAT	16.4.0
2020-06	RAN#88	R5-202058	0648	-	F	Addition 8.5.2.2.1	16.4.0
2020-06	RAN#88	R5-202059	0649	-	F	Addition 8.5.2.2.2	16.4.0
2020-06	RAN#88	R5-202060	0650	-	F	Minimum Requirements SS-SINR iRAT	16.4.0
2020-06	RAN#88	R5-202061	0651	-	F	Addition 8.5.2.3.1	16.4.0
2020-06	RAN#88	R5-202062	0652	-	F	Addition 8.5.2.3.2	16.4.0
2020-06	RAN#88	R5-202063	0653	-	F	Minimum requirements SS-RSRP NSA FR2	16.4.0
2020-06	RAN#88	R5-202064	0654	-	F	Addition 5.7.1.1	16.4.0
2020-06	RAN#88	R5-202065	0655	-	F	Addition 5.7.1.2	16.4.0
2020-06	RAN#88	R5-202066	0656	-	F	Addition 5.7.1.3	16.4.0
2020-06	RAN#88	R5-202067	0657	-	F	Minimum requirements SS-RSRQ NSA FR2	16.4.0
2020-06	RAN#88	R5-202068	0658	-	F	Addition 5.7.2.1	16.4.0
2020-06	RAN#88	R5-202069	0659	-	F	Addition 5.7.2.2	16.4.0
2020-06	RAN#88	R5-202070	0660	-	F	Minimum requirements SS-SINR NSA FR2	16.4.0
2020-06	RAN#88	R5-202071	0661	-	F	Addition 5.7.3.1	16.4.0
2020-06	RAN#88	R5-202072	0662	-	F	Addition 5.7.3.2	16.4.0
2020-06	RAN#88	R5-202073	0663	-	F	Minimum requirements SS-RSRP SA FR2	16.4.0
2020-06	RAN#88	R5-202074	0664	-	F	Addition 7.7.1.1	16.4.0
2020-06	RAN#88	R5-202075	0665	-	F	Addition 7.7.1.2	16.4.0
2020-06	RAN#88	R5-202076	0666	-	F	Minimum requirements SS-RSRQ SA FR2	16.4.0
2020-06	RAN#88	R5-202077	0667	-	F	Addition 7.7.2.1	16.4.0
2020-06	RAN#88	R5-202078	0668	-	F	Addition 7.7.2.2	16.4.0
2020-06	RAN#88	R5-202079	0669	-	F	Minimum requirements SS-SINR SA FR2	16.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-06	RAN#88	R5-202080	0670	-	F	Addition 7.7.3.1	16.4.0
2020-06	RAN#88	R5-202081	0671	-	F	Addition 7.7.3.2	16.4.0
2020-06	RAN#88	R5-202091	0672	-	F	Correction of OCNG configurations and CSI-RS for tracking in Annex A	16.4.0
2020-06	RAN#88	R5-202092	0673	-	F	Cell configuration for SA FR2 event-triggered reporting test cases	16.4.0
2020-06	RAN#88	R5-202093	0674	-	F	Correction of MeasGapConfig in Annex H	16.4.0
2020-06	RAN#88	R5-202095	0676	-	F	Correction of AoA configuration for FR2 SA Inter-freq measurement test cases in clause 5.6.2	16.4.0
2020-06	RAN#88	R5-202096	0677	-	F	Correction of RRM Test Case 7.6.2.1	16.4.0
2020-06	RAN#88	R5-202097	0678	-	F	Correction of RRM Test Case 7.6.2.2	16.4.0
2020-06	RAN#88	R5-202098	0679	-	F	Correction of RRM Test Case 7.6.2.3	16.4.0
2020-06	RAN#88	R5-202099	0680	-	F	Correction of RRM Test Case 7.6.2.4	16.4.0
2020-06	RAN#88	R5-202100	0681	-	F	Correction of RRM Test Case 7.6.2.5	16.4.0
2020-06	RAN#88	R5-202101	0682	-	F	Correction of RRM Test Case 7.6.2.6	16.4.0
2020-06	RAN#88	R5-202102	0683	-	F	Correction of RRM Test Case 7.6.2.7	16.4.0
2020-06	RAN#88	R5-202103	0684	-	F	Correction of RRM Test Case 7.6.2.8	16.4.0
2020-06	RAN#88	R5-202263	0704	-	F	Core alignment in 4.6.1.5 and 4.6.1.6 Event Triggered Reporting with SSB time index detection	16.4.0
2020-06	RAN#88	R5-202265	0706	-	F	Correction on EN-DC FR1 radio link monitoring out-of-sync test	16.4.0
2020-06	RAN#88	R5-202273	0714	-	F	Correction to NR SA FR1 - E-UTRA RRC Connection release with redirection	16.4.0
2020-06	RAN#88	R5-202277	0718	-	F	Editorial Correction to FR2 Interruption test cases	16.4.0
2020-06	RAN#88	R5-202385	0720	-	F	Addition of RRM Cell configuration mapping table for EN-DC FR1 Test Case 4.5.4.1	16.4.0
2020-06	RAN#88	R5-202387	0721	-	F	Addition of RRC message content exceptions for UE UL Carrier Reconfiguration Delay	16.4.0
2020-06	RAN#88	R5-202389	0722	-	F	Addition of RRM Test Case 4.5.4.1 in Annex F	16.4.0
2020-06	RAN#88	R5-202415	0728	-	F	Alignment 5.4.1.1 test procedure with 4.4.1.1	16.4.0
2020-06	RAN#88	R5-202418	0730	-	F	Update 6.5.1.1 and CSI-ReportConfig in Annex H	16.4.0
2020-06	RAN#88	R5-202488	0736	-	F	Correction to the simulated cell for cell-reselection test cases	16.4.0
2020-06	RAN#88	R5-202496	0744	-	F	Correction of RRM Test Case 6.4.1.1	16.4.0
2020-06	RAN#88	R5-202497	0745	-	F	Title Correction of Annex D.4.2.4	16.4.0
2020-06	RAN#88	R5-202700	0723	1	F	Addition of new RRM Test Case 4.5.4.1	16.4.0
2020-06	RAN#88	R5-202701	0675	1	F	Editorial correction of RRM TT in Annex F	16.4.0
2020-06	RAN#88	R5-202744	0708	1	F	Correction to EN-DC FR1 radio link monitoring tests	16.4.0
2020-06	RAN#88	R5-202745	0727	1	F	Clarification cell2 SS-RSRP in 4.7.1.2.1	16.4.0
2020-06	RAN#88	R5-202746	0587	1	F	Addition to NR test case 5.5.5.5 scheduling available restriction	16.4.0
2020-06	RAN#88	R5-202747	0707	1	F	Correction on NR SA FR1 - E-UTRAN event-triggered reporting tests	16.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-06	RAN#88	R5-202748	0731	1	F	Update 6.5.1.2 message content exception and test procedure	16.4.0
2020-06	RAN#88	R5-202749	0737	1	F	Correction of RRM Test Case 6.1.1.1	16.4.0
2020-06	RAN#88	R5-202750	0738	1	F	Correction of RRM Test Case 6.1.1.2	16.4.0
2020-06	RAN#88	R5-202751	0621	1	F	Update of TC 7.1.1.1 intra-freq cell re-selection	16.4.0
2020-06	RAN#88	R5-202752	0622	1	F	Update of TC 7.1.1.2 inter-freq cell re-selection	16.4.0
2020-06	RAN#88	R5-202753	0724	1	F	Addition of new RRM Test Cases in clause 7.5.3	16.4.0
2020-06	RAN#88	R5-202754	0725	1	F	Addition of new RRM Test Cases in clause 7.5.7	16.4.0
2020-06	RAN#88	R5-202812	0685	1	F	Correction to Test Applicability for 4.6.1.3 EN-DC FR1 event-triggered reporting with gap in non-DRX	16.4.0
2020-06	RAN#88	R5-202813	0686	1	F	Correction to Test Applicability for 4.6.1.4 EN-DC FR1 event-triggered reporting with gap in DRX	16.4.0
2020-06	RAN#88	R5-202814	0687	1	F	Correction to Test Applicability & Message Exception for 4.6.1.6 EN-DC FR1 event-triggered reporting with gap in non-DRX with SSB time index detection	16.4.0
2020-06	RAN#88	R5-202815	0688	1	F	Correction to Test Applicability for 6.6.1.3 NR SA FR1 event-triggered reporting with gap in non-DRX	16.4.0
2020-06	RAN#88	R5-202816	0689	1	F	Correction to Test Applicability for 6.6.1.4 NR SA FR1 event-triggered reporting with gap in DRX	16.4.0
2020-06	RAN#88	R5-202817	0732	1	F	Correction to Test Requirement for 4.4.3.1 by updating TT values from Annex F	16.4.0
2020-06	RAN#88	R5-202833	0591	1	F	Addition to NR test case 6.3.2.1.3 FR1-FR1 RRC re-establishment without serving cell timing	16.4.0
2020-06	RAN#88	R5-202834	0575	1	F	Correction to NR test case 7.7.1.3.1 SA FR2 SS-RSRP absolute accuracy	16.4.0
2020-06	RAN#88	R5-202835	0592	1	F	Addition to NR test case 7.3.2.1.3 FR2-FR2 RRC re-establishment without serving cell timing	16.4.0
2020-06	RAN#88	R5-202836	0594	1	F	Addition to NR test case 7.5.1.9 FR2 RLM scheduling restrictions	16.4.0
2020-06	RAN#88	R5-202837	0578	1	F	Correction to NR test case 8.3.1.1 handover to known cell	16.4.0
2020-06	RAN#88	R5-202838	0597	1	F	Addition of Default Configuration in Annex H	16.4.0
2020-06	RAN#88	R5-202839	0628	1	F	Update of Annex D.4.1.1 for parameters of BFD with 4RX	16.4.0
2020-06	RAN#88	R5-202840	0630	1	F	Update of Cell mapping in Annex E	16.4.0
2020-06	RAN#88	R5-202841	0633	1	F	Add auxiliary bands for RRM inter-frequency SA tests	16.4.0
2020-06	RAN#88	R5-202909	0697	1	F	Correction to Test Requirements in 4.4.1.1, Table 4.4.1.1.5-5 to include TT values from Annex F	16.4.0
2020-06	RAN#88	R5-202910	0698	1	F	Correction to Test Requirements in 6.4.1.1, Table 6.4.1.1.5-5 to include TT values from Annex F	16.4.0
2020-06	RAN#88	R5-202911	0734	1	F	Correction to Test Requirement for 6.4.3.1 by updating TT values from Annex F	16.4.0
2020-06	RAN#88	R5-202912	0735	1	F	Annex I RRM OTA procedures update to add RSRPB based UE Positioning Method for FR2	16.4.0
2020-06	RAN#88	R5-202913	0703	1	F	Clarification of disabling Tx diversity for FR2 UE for FR2 RRM testing	16.4.0
2020-06	RAN#88	R5-202914	0719	1	F	Updates of FR2 MU and TT in TS 38.533	16.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-06	RAN#88	R5-202950	0693	1	F	Correction to Message Exception for 4.6.2.5 EN-DC FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection	16.4.0
2020-06	RAN#88	R5-202951	0694	1	F	Correction to Message Exception for 4.6.2.6 EN-DC FR1-FR1 event-triggered reporting in DRX with SSB time index detection	16.4.0
2020-06	RAN#88	R5-202961	0690	1	F	Correction to Test Applicability and Message Exception for 6.6.1.6 NR SA FR1 event-triggered reporting with gap in non-DRX with SSB index reading	16.4.0
2020-06	RAN#88	R5-202969	0639	1	F	Corrections to 4.7.2.1	16.4.0
2020-06	RAN#88	R5-202970	0641	1	F	Corrections to 4.7.3.1	16.4.0
2020-06	RAN#88	R5-202971	0642	1	F	Corrections to 4.7.3.2	16.4.0
2020-06	RAN#88	R5-202972	0598	1	F	Corrections to 6.7.1.2 and core spec alignment	16.4.0
2020-06	RAN#88	R5-202973	0599	1	F	Corrections to 6.7.2.1 and core spec alignment	16.4.0
2020-06	RAN#88	R5-202974	0600	1	F	Corrections to 6.7.2.2 and core spec alignment	16.4.0
2020-06	RAN#88	R5-202975	0601	1	F	Corrections to 6.7.3.1 and core spec alignment	16.4.0
2020-06	RAN#88	R5-202976	0602	1	F	Corrections to 6.7.3.2 and core spec alignment	16.4.0
2020-06	RAN#88	R5-202977	0638	1	F	Corrections to 4.7.1.2	16.4.0
2020-06	RAN#88	R5-202978	0640	1	F	Corrections to 4.7.2.2	16.4.0
2020-06	RAN#88	R5-202982	0710	1	F	Correction to FR1 UE transmit timing accuracy	16.4.0
2020-06	RAN#88	R5-202983	0709	1	F	Correction to EN-DC FR2 RRC-based DL active BWP switch in non-DRX in synchronous ENDC	16.4.0
2020-06	RAN#88	R5-202984	0711	1	F	Correction to FR2 UE transmit timing accuracy	16.4.0
2020-06	RAN#88	R5-202985	0705	1	F	Core alignment in 6.6.1.2 NR SA FR1 event-triggered reporting without gap in DRX	16.4.0
2020-06	RAN#88	R5-202986	0713	1	F	Correction to NR E-UTRA reselection tests	16.4.0
2020-06	RAN#88	R5-202987	0715	1	F	Correction to NR SA FR1 handover test cases	16.4.0
2020-06	RAN#88	R5-202996	0604	1	F	Update FR1 Test Tolerance of 4.5.2.5 E-UTRAN SCC in sync	16.4.0
2020-06	RAN#88	R5-202997	0605	1	F	Update FR1 Test Tolerance of 4.5.2.6 E-UTRAN SCC in async	16.4.0
2020-06	RAN#88	R5-202998	0606	1	F	Update FR1 Test Tolerance of 4.5.3.1 SCell activation 160ms	16.4.0
2020-06	RAN#88	R5-202999	0607	1	F	Update FR1 Test Tolerance of 4.5.3.2 SCell activation 320ms	16.4.0
2020-06	RAN#88	R5-203000	0608	1	F	Update FR1 Test Tolerance of 4.5.3.3 unknown SCell activation	16.4.0
2020-06	RAN#88	R5-203091	0623	1	F	Update of 4.5.3.0 minimum requirements for Scell activation	16.4.0
2020-06	RAN#88	R5-203092	0613	1	F	Update FR1 Test Tolerance of 6.5.4.1 UL carrier RRC reconfiguration delay	16.4.0
2020-06	RAN#88	R5-203093	0629	1	F	Update of FR1 Test Tolerance in Annex F	16.4.0
2020-06	RAN#88	R5-203095	0609	1	F	Addition FR1 Test Tolerance of 6.5.5.1 SSB BFD non-DRX	16.4.0
2020-06	RAN#88	R5-203096	0610	1	F	Addition FR1 Test Tolerance of 6.5.5.2 SSB BFD DRX	16.4.0
2020-06	RAN#88	R5-203097	0611	1	F	Update FR1 Test Tolerance of 6.5.5.3 CSI-RS BFD non-DRX	16.4.0
2020-06	RAN#88	R5-203098	0612	1	F	Update FR1 Test Tolerance of 6.5.5.4 CSI-RS BFD DRX	16.4.0
2020-09	RAN#89	R5-203234	0747	-	F	Update TC 8.5.2.1.1.1 with TT results and message contents	16.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-09	RAN#89	R5-203235	0748	-	F	Update TC 8.5.2.2.1 with TT results and message contents	16.5.0
2020-09	RAN#89	R5-203249	0758	-	F	Annex E and F update with TT results for 8.5.2.x.x iRAT periodic reporting test cases	16.5.0
2020-09	RAN#89	R5-203250	0759	-	F	Annex E and F update with TT results for 4.7.4.x.x EN-DC L1-RSRP periodic reporting test cases	16.5.0
2020-09	RAN#89	R5-203252	0761	-	F	Void unnecessary TC 8.5.2.1.1.2	16.5.0
2020-09	RAN#89	R5-203267	0765	-	F	[EDITORIAL] Fix formatting issues throwing DOCX conversion errors in TS 38.533	16.5.0
2020-09	RAN#89	R5-203268	0766	-	F	Correction of test applicability for EN-DC event-triggered tests	16.5.0
2020-09	RAN#89	R5-203269	0767	-	F	Correction of test applicability for NR SA event-triggered tests	16.5.0
2020-09	RAN#89	R5-203270	0768	-	F	Adding annex table for iRAT measurement configuration	16.5.0
2020-09	RAN#89	R5-203271	0769	-	F	Clarification on the usage of auxiliary bands	16.5.0
2020-09	RAN#89	R5-203272	0770	-	F	Remove IE includeBeamMeasurements from 6.6.1.5 and 6.6.1.6	16.5.0
2020-09	RAN#89	R5-203280	0772	-	F	n26 addition to group of bands in 38.533	16.5.0
2020-09	RAN#89	R5-203299	0773	-	F	Corrected test description in non-DRX test case 6.5.1.2	16.5.0
2020-09	RAN#89	R5-203300	0774	-	F	Correction of comment for monitoringSymbolsWithinSlot	16.5.0
2020-09	RAN#89	R5-203301	0775	-	F	Correction of delta offset application for Cell 2 in test case 4.7.1.2.1	16.5.0
2020-09	RAN#89	R5-203303	0777	-	F	PUSCH allocation correction in test case 6.4.3.1	16.5.0
2020-09	RAN#89	R5-203304	0778	-	F	Correction to the RRC Reconfiguration message for measurements	16.5.0
2020-09	RAN#89	R5-203306	0779	-	F	Update extreme conditions limits in TC 4.7.1.2.1	16.5.0
2020-09	RAN#89	R5-203307	0780	-	F	Update extreme conditions limits in TC 6.7.1.2.1	16.5.0
2020-09	RAN#89	R5-203308	0781	-	F	Update extreme conditions limits in TC 4.7.1.2.1 and TC 6.7.1.2.1 - Annex F	16.5.0
2020-09	RAN#89	R5-203309	0782	-	F	Correction power offset for Band Group F	16.5.0
2020-09	RAN#89	R5-203317	0786	-	F	Removing SearchSpaceId and ControlResourceSetId modification	16.5.0
2020-09	RAN#89	R5-203319	0788	-	F	Unification of cell frequency for FR1-FR1 test cases	16.5.0
2020-09	RAN#89	R5-203732	0790	-	F	Set ss-sinr request to false for EN-DC RRM measurement accuracy tests	16.5.0
2020-09	RAN#89	R5-203733	0791	-	F	Set ss-sinr request to false for NR SA RRM measurement accuracy tests	16.5.0
2020-09	RAN#89	R5-203832	0798	-	F	Update of 4.5.6.1.0 minimum requirement for DCI-based BWP switch	16.5.0
2020-09	RAN#89	R5-203835	0801	-	F	Update of 4.5.6.2.0 minimum requirement for RRC-based BWP switch	16.5.0
2020-09	RAN#89	R5-203837	0803	-	F	Update of FR1 Test Tolerance in 6.3.2.1.3 RRC re-establishment without serving cell timing	16.5.0
2020-09	RAN#89	R5-203838	0804	-	F	Addition of 6.5.2.0 minimum requirement for interruptions during measurements on NR SCC	16.5.0
2020-09	RAN#89	R5-203839	0805	-	F	Update of 6.5.2.1 interruptions during measurements on deactivated NR SCC	16.5.0
2020-09	RAN#89	R5-203840	0806	-	F	Addition of new Test Case 6.5.3.1 SCell activation and deactivation for 160ms cycle	16.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-09	RAN#89	R5-203841	0807	-	F	Addition of new Test Case 6.5.3.2 SCell activation and deactivation for 320ms cycle	16.5.0
2020-09	RAN#89	R5-203842	0808	-	F	Addition of new Test Case 6.5.3.3 SCell activation and deactivation of unknown SCell	16.5.0
2020-09	RAN#89	R5-203847	0813	-	F	Update of 6.5.6.1.0 minimum requirement for DCI-based BWP switch	16.5.0
2020-09	RAN#89	R5-203850	0816	-	F	Update of 6.5.6.2.0 minimum requirement for RRC-based BWP switch	16.5.0
2020-09	RAN#89	R5-203853	0819	-	F	Correction to FR1 intra-frequency measurement with gap test cases	16.5.0
2020-09	RAN#89	R5-203855	0821	-	F	Update of Cell mapping in Annex E	16.5.0
2020-09	RAN#89	R5-204034	0827	-	F	CR to 38.533 on RRM Test Cases in clause 7.5.3	16.5.0
2020-09	RAN#89	R5-204036	0828	-	F	CR to 38.533 on RRM Test Cases in clause 7.5.7	16.5.0
2020-09	RAN#89	R5-204068	0829	-	F	Correction to FR2 timing advance adjustment accuracy	16.5.0
2020-09	RAN#89	R5-204069	0830	-	F	Correction to EN-DC FR2 interruptions at transitions between active and non-active during DRX	16.5.0
2020-09	RAN#89	R5-204070	0831	-	F	Addition of E-UTRA Test frequency selection rule for IRAT test cases	16.5.0
2020-09	RAN#89	R5-204071	0832	-	F	Correction on event-triggered reporting with gap in DRX and DRX configuration settings for NR serving cell	16.5.0
2020-09	RAN#89	R5-204072	0833	-	F	Correction to EN-DC and SA FR1-FR1 SS-RSRP and SS-RSRQ periodical measurement accuracy	16.5.0
2020-09	RAN#89	R5-204073	0834	-	F	Correction to SS-RSRQ periodical measurement accuracy	16.5.0
2020-09	RAN#89	R5-204075	0836	-	F	Correction to message configuration for radio link monitoring tests	16.5.0
2020-09	RAN#89	R5-204076	0837	-	F	Correction to NR SA FR1 E-UTRA RRC connection release with redirection	16.5.0
2020-09	RAN#89	R5-204077	0838	-	F	Correction to SRS PeriodicityAndOffset for Timing Advance tests	16.5.0
2020-09	RAN#89	R5-204079	0840	-	F	Correction to CSI-RS for tracking for TDD FR2	16.5.0
2020-09	RAN#89	R5-204116	0841	-	F	Correction of EN-DC FR2 SSB-based L1-RSRP measurement test case 5.6.3.1	16.5.0
2020-09	RAN#89	R5-204118	0843	-	F	Correction of EN-DC FR2 CSI-RS-based L1-RSRP measurement test case 5.6.3.3	16.5.0
2020-09	RAN#89	R5-204119	0844	-	F	Correction of EN-DC FR2 CSI-RS-based L1-RSRP measurement test case 5.6.3.4	16.5.0
2020-09	RAN#89	R5-204122	0847	-	F	Correction of NR SA FR2 SSB-based L1-RSRP measurement test case 7.6.3.1	16.5.0
2020-09	RAN#89	R5-204123	0848	-	F	Correction of NR SA FR2 SSB-based L1-RSRP measurement test case 7.6.3.2	16.5.0
2020-09	RAN#89	R5-204124	0849	-	F	Correction of NR SA FR2 CSI-RS-based L1-RSRP measurement test case 7.6.3.3	16.5.0
2020-09	RAN#89	R5-204125	0850	-	F	Correction of NR SA FR2 CSI-RS-based L1-RSRP measurement test case 7.6.3.4	16.5.0
2020-09	RAN#89	R5-204126	0851	-	F	Correction of minimum conformance requirements 4.6.4.0 for EN-DC FR1 L1-RSRP measurement test cases	16.5.0
2020-09	RAN#89	R5-204127	0852	-	F	Correction of minimum conformance requirements 5.6.3.0 for EN-DC FR2 L1-RSRP measurement test cases	16.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-09	RAN#89	R5-204128	0853	-	F	Correction of minimum conformance requirements 7.6.3.0 for SA FR2 L1-RSRP measurement test cases	16.5.0
2020-09	RAN#89	R5-204220	0854	-	F	Update missing SMTC and SSB configurations in H.2	16.5.0
2020-09	RAN#89	R5-204221	0855	-	F	Update missing SMTC and SSB configurations in H.3	16.5.0
2020-09	RAN#89	R5-204222	0856	-	F	Editorial: correct table placement in H.2	16.5.0
2020-09	RAN#89	R5-204285	0859	-	F	Correction to Message Exceptions for 4.6.2.5 EN-DC FR1-FR1 event-triggered reporting in non-DRX with SSB time index detection	16.5.0
2020-09	RAN#89	R5-204337	0874	-	F	Addition of 4.5.5.0 minimum requirement for BFR	16.5.0
2020-09	RAN#89	R5-204730	0792	1	F	Update of PDSCH RMC in Annex A.1.1	16.5.0
2020-09	RAN#89	R5-204733	0793	1	F	Correction of RRM Test Case 6.1.1.1	16.5.0
2020-09	RAN#89	R5-204734	0824	1	F	Correction of RRM Test Case 6.1.1.2	16.5.0
2020-09	RAN#89	R5-204735	0825	1	F	Correction of RRM Test Case 7.1.1.1	16.5.0
2020-09	RAN#89	R5-204736	0826	1	F	Correction of RRM Test Case 7.1.1.2	16.5.0
2020-09	RAN#89	R5-204775	0751	1	F	Update TC 4.7.4.1.2 with TT results and message contents	16.5.0
2020-09	RAN#89	R5-204776	0753	1	F	Update TC 4.7.4.2.2 with TT results and message contents	16.5.0
2020-09	RAN#89	R5-204777	0771	1	F	Correction of measurement gap configuration for intra-frequency even-triggered tests needing gap	16.5.0
2020-09	RAN#89	R5-204778	0755	1	F	Update TC 6.7.4.1.2 with TT results and message contents	16.5.0
2020-09	RAN#89	R5-204779	0757	1	F	Update TC 6.7.4.2.2 with TT results and message contents	16.5.0
2020-09	RAN#89	R5-204780	0762	1	F	Correction to the test procedure of NR SA event triggered tests	16.5.0
2020-09	RAN#89	R5-204781	0763	1	F	Correction to the test procedure of NR SA event triggered tests inter-freq	16.5.0
2020-09	RAN#89	R5-204782	0764	1	F	Correction to the test procedure of NR SA event triggered tests inter-RAT	16.5.0
2020-09	RAN#89	R5-204783	0749	1	F	Update TC 8.5.2.3.1 with TT results and message contents	16.5.0
2020-09	RAN#89	R5-204784	0760	1	F	Annex E and F update with TT results for 6.7.4.x.x NR SA L1-RSRP periodic reporting test cases	16.5.0
2020-09	RAN#89	R5-204785	0785	1	F	Correction in A.1.4 CSI-RS for nzp-CSI-RS-ResourceId values	16.5.0
2020-09	RAN#89	R5-204786	0820	1	F	Update of FR1 Test Tolerance in Annex F	16.5.0
2020-09	RAN#89	R5-204787	0823	1	F	Correction to default configurations in Annex H	16.5.0
2020-09	RAN#89	R5-204872	0857	1	F	Correction to Test Procedure and sync to latest RAN4 in 4.4.1.1 EN-DC FR1 UE transmit timing accuracy	16.5.0
2020-09	RAN#89	R5-204873	0858	1	F	Correction to Test Procedure and sync to latest RAN4 in 6.4.1.1 NR SA FR1 UE transmit timing accuracy	16.5.0
2020-09	RAN#89	R5-204874	0866	1	F	Correction to 6.5.1.1 NR SA FR1 RLM OOS test with SSB-based RLM RS in non-DRX mode, sync to latest RAN4 Core Spec	16.5.0
2020-09	RAN#89	R5-204875	0867	1	F	Correction to 6.5.1.2 NR SA FR1 RLM IS test with SSB-based RLM RS in non-DRX mode, sync to latest RAN4 Core Spec	16.5.0
2020-09	RAN#89	R5-204876	0868	1	F	Correction to 6.5.1.3 NR SA FR1 RLM OOS test with SSB-based RLM RS in DRX mode, sync to latest RAN4 Core Spec	16.5.0
2020-09	RAN#89	R5-204877	0869	1	F	Correction to 6.5.1.4 NR SA FR1 RLM IS test with SSB-based RLM RS in DRX mode, sync to latest RAN4 Core Spec	16.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-09	RAN#89	R5-204878	0750	1	F	Update TC 4.7.4.1.1 with TT results and message contents	16.5.0
2020-09	RAN#89	R5-204879	0752	1	F	Update TC 4.7.4.2.1 with TT results and message contents	16.5.0
2020-09	RAN#89	R5-204880	0754	1	F	Update TC 6.7.4.1.1 with TT results and message contents	16.5.0
2020-09	RAN#89	R5-204881	0756	1	F	Update TC 6.7.4.2.1 with TT results and message contents	16.5.0
2020-09	RAN#89	R5-204882	0776	1	F	Gap Pattern Id correction in section 6.6.2 to align to core spec 38.133	16.5.0
2020-09	RAN#89	R5-204883	0787	1	F	Test Procedure correction in test case 6.5.1.3 for definition of Point C	16.5.0
2020-09	RAN#89	R5-204884	0789	1	F	Addition of new RRM Test Cases in clause 7.5.5	16.5.0
2020-09	RAN#89	R5-204885	0783	1	F	CR to update the RRM FR2 MUs in Annex F	16.5.0
2020-09	RAN#89	R5-204886	0784	1	F	Add information on the AoA change during test for RRM FR2 tests	16.5.0
2020-09	RAN#89	R5-204941	0835	1	F	Correction to connection diagram for radio link monitoring tests	16.5.0
2020-09	RAN#89	R5-204942	0842	1	F	Correction of EN-DC FR2 SSB-based L1-RSRP measurement test case 5.6.3.2	16.5.0
2020-09	RAN#89	R5-204943	0845	1	F	Correction of FR2 condition tables in Annex B	16.5.0
2020-09	RAN#89	R5-204944	0846	1	F	Introduction of band n259 in clause 3	16.5.0
2020-09	RAN#89	R5-204985	0794	1	F	Update of FR1 Test Tolerance in 4.5.5.1 SSB based BFR in non-DRX	16.5.0
2020-09	RAN#89	R5-204986	0795	1	F	Update of FR1 Test Tolerance in 4.5.5.2 SSB based BFR in DRX	16.5.0
2020-09	RAN#89	R5-204987	0796	1	F	Addition of new Test Case 4.5.5.3 CSI-RS based BFR non-DRX with FR1 Test Tolerance	16.5.0
2020-09	RAN#89	R5-204988	0797	1	F	Update of FR1 Test Tolerance in 4.5.5.4 CSI-RS based BFR in DRX	16.5.0
2020-09	RAN#89	R5-204989	0799	1	F	Update of FR1 Test Tolerance in 4.5.6.1.1 DCI-based BWP switch	16.5.0
2020-09	RAN#89	R5-204990	0800	1	F	Update of FR1 Test Tolerance in 4.5.6.1.2 DCI-based BWP switch with SCell	16.5.0
2020-09	RAN#89	R5-204991	0802	1	F	Update of FR1 Test Tolerance in 4.5.6.2.1 RRC-based BWP switch	16.5.0
2020-09	RAN#89	R5-204992	0809	1	F	Update of FR1 Test Tolerance in 6.5.5.1 SSB based BFR in non-DRX	16.5.0
2020-09	RAN#89	R5-204993	0810	1	F	Update of FR1 Test Tolerance in 6.5.5.2 SSB based BFR in DRX	16.5.0
2020-09	RAN#89	R5-204994	0811	1	F	Update of FR1 Test Tolerance in 6.5.5.3 CSI-RS based BFR in non-DRX	16.5.0
2020-09	RAN#89	R5-204995	0812	1	F	Update of FR1 Test Tolerance in 6.5.5.4 CSI-RS based BFR in DRX	16.5.0
2020-09	RAN#89	R5-204996	0814	1	F	Update of FR1 Test Tolerance in 6.5.6.1.1 DCI-based BWP switch with SCell	16.5.0
2020-09	RAN#89	R5-204997	0815	1	F	Addition of new Test Case 6.5.6.1.2 DCI-based BWP switch with FR1 Test Tolerance	16.5.0
2020-09	RAN#89	R5-204998	0817	1	F	Update of FR1 Test Tolerance in 6.5.6.2.1 RRC-based BWP switch	16.5.0
2020-09	RAN#89	R5-204999	0818	1	F	Update of test parameters in 6.3.1.4 inter-RAT handover	16.5.0
2020-09	RAN#89	R5-205000	0822	1	F	Update of default configurations for RMC scheduling in Annex A	16.5.0
2020-12	RAN#90	R5-205051	0879	-	F	Message contents for RRM iRAT	16.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-12	RAN#90	R5-205059	0884	-	F	Message contents for RRM PSCell addition	16.6.0
2020-12	RAN#90	R5-205063	0885	-	F	Update RRM 8.5.2.1.2 including TT analysis results	16.6.0
2020-12	RAN#90	R5-205068	0890	-	F	Correction of the measObjectID, measID and reportConfigID in Annex H	16.6.0
2020-12	RAN#90	R5-205070	0892	-	F	Remove includeBeamMeasurements requirement for TC4.6.1.5	16.6.0
2020-12	RAN#90	R5-205257	0907	-	F	NR Band n53 addition to RRM group of bands	16.6.0
2020-12	RAN#90	R5-205296	0914	-	F	Add FR2 Fading MU values	16.6.0
2020-12	RAN#90	R5-205813	0920	-	F	Correction of EN-DC FR2 Inter-frequency measurements test case 5.6.2.1	16.6.0
2020-12	RAN#90	R5-205814	0921	-	F	Correction of EN-DC FR2 Inter-frequency measurements test case 5.6.2.2	16.6.0
2020-12	RAN#90	R5-205815	0922	-	F	Correction of EN-DC FR2 Inter-frequency measurements test case 5.6.2.3	16.6.0
2020-12	RAN#90	R5-205816	0923	-	F	Correction of EN-DC FR2 Inter-frequency measurements test case 5.6.2.4	16.6.0
2020-12	RAN#90	R5-205817	0924	-	F	Correction of EN-DC FR2 Inter-frequency measurements test case 5.6.2.5	16.6.0
2020-12	RAN#90	R5-205818	0925	-	F	Correction of EN-DC FR2 Inter-frequency measurements test case 5.6.2.6	16.6.0
2020-12	RAN#90	R5-205819	0926	-	F	Correction of EN-DC FR2 Inter-frequency measurements test case 5.6.2.7	16.6.0
2020-12	RAN#90	R5-205820	0927	-	F	Correction of EN-DC FR2 Inter-frequency measurements test case 5.6.2.8	16.6.0
2020-12	RAN#90	R5-205821	0928	-	F	Correction of NR SA FR2 Inter-frequency measurements test case 7.6.2.1	16.6.0
2020-12	RAN#90	R5-205822	0929	-	F	Correction of NR SA FR2 Inter-frequency measurements test case 7.6.2.2	16.6.0
2020-12	RAN#90	R5-205823	0930	-	F	Correction of NR SA FR2 Inter-frequency measurements test case 7.6.2.3	16.6.0
2020-12	RAN#90	R5-205824	0931	-	F	Correction of NR SA FR2 Inter-frequency measurements test case 7.6.2.4	16.6.0
2020-12	RAN#90	R5-205826	0933	-	F	Correction of NR SA FR2 Inter-frequency measurements test case 7.6.2.6	16.6.0
2020-12	RAN#90	R5-205827	0934	-	F	Correction of NR SA FR2 Inter-frequency measurements test case 7.6.2.7	16.6.0
2020-12	RAN#90	R5-205828	0935	-	F	Correction of NR SA FR2 Inter-frequency measurements test case 7.6.2.8	16.6.0
2020-12	RAN#90	R5-205834	0939	-	F	Correction of message content exceptions in Annex H	16.6.0
2020-12	RAN#90	R5-205953	0946	-	F	Update of FR1 TT in 8.4.1.1 inter-RAT SFTD in non-DRX	16.6.0
2020-12	RAN#90	R5-205954	0947	-	F	Update of FR1 TT in 8.4.1.2 inter-RAT SFTD in DRX	16.6.0
2020-12	RAN#90	R5-205960	0953	-	F	Addition of test case 5.5.1.9 EN-DC FR2 radio link monitoring UE scheduling restrictions	16.6.0
2020-12	RAN#90	R5-205961	0954	-	F	Update of test case 5.5.3.1 EN-DC FR2 SCell activation and deactivation	16.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-12	RAN#90	R5-205963	0956	-	F	Update of 7.3.2.1.3 SA FR2 RRC re-establishment without serving cell timing	16.6.0
2020-12	RAN#90	R5-205967	0960	-	F	Update of Annex E for cell mapping	16.6.0
2020-12	RAN#90	R5-205975	0964	-	F	Correction to default configuration in Annex H	16.6.0
2020-12	RAN#90	R5-205976	0965	-	F	Correction to SSB reference configuration	16.6.0
2020-12	RAN#90	R5-206100	0968	-	F	Correction to EN-DC FR1 interruptions at transitions between active and non-active during DRX	16.6.0
2020-12	RAN#90	R5-206102	0970	-	F	Correction to FR1 NSA SS-SINR measurement TCs	16.6.0
2020-12	RAN#90	R5-206105	0973	-	F	Correction to message exception for inter-RAT reselection TCs	16.6.0
2020-12	RAN#90	R5-206106	0974	-	F	Editorial correction of RSRP tests	16.6.0
2020-12	RAN#90	R5-206111	0976	-	F	Update of Annex C.1.3 of default connection setup	16.6.0
2020-12	RAN#90	R5-206156	0977	-	F	Addition of missing PRACH configuration 4 for FR1 and FR2 applicability	16.6.0
2020-12	RAN#90	R5-206214	0979	-	F	Alignment test parameter table with TS 38.133 in SA cell reselection test case	16.6.0
2020-12	RAN#90	R5-206215	0980	-	F	Alignment test parameter table with TS 38.133 in SA handover test case	16.6.0
2020-12	RAN#90	R5-206216	0981	-	F	Addition RLM IE into event trigger reporting CSI-RS based RLM	16.6.0
2020-12	RAN#90	R5-206217	0982	-	F	Addition RLM IE into event trigger reporting SSB based	16.6.0
2020-12	RAN#90	R5-206219	0984	-	F	Update message content section in SS-SINR test cases	16.6.0
2020-12	RAN#90	R5-206221	0985	-	F	Update to Section 5.4.1.1 NSA FR2 Transmit Timing Accuracy	16.6.0
2020-12	RAN#90	R5-206222	0986	-	F	Update to Section 5.4.3.1 NSA FR2 Timing Advance Accuracy	16.6.0
2020-12	RAN#90	R5-206606	0998	-	F	Update of CSI-RS RMC configuration in Annex A	16.6.0
2020-12	RAN#90	R5-206672	0918	1	F	Editorial CR to clarify SS-RSRP dBm / 15 kHz for PRACH tests	16.6.0
2020-12	RAN#90	R5-206673	0941	1	F	Correction of RRM TC 4.7.2.1	16.6.0
2020-12	RAN#90	R5-206674	0943	1	F	Update of message contents for EN-DC RLM test case	16.6.0
2020-12	RAN#90	R5-206675	0969	1	F	Correction to FR1 Inter frequency Event triggered Reporting test cases	16.6.0
2020-12	RAN#90	R5-206677	0987	1	F	Update to Message Exceptions for 4.3.2.2.2 EN-DC Non Contention Based Random Access	16.6.0
2020-12	RAN#90	R5-206678	0989	1	F	Update to 4.5.1.1 NSA FR1 OOS RLM to reword the Note for proper application of SNR for 4Rx Vs 2Rx	16.6.0
2020-12	RAN#90	R5-206679	0990	1	F	Update to 4.5.1.2 NSA FR1 IS RLM to reword the Note for proper application of SNR for 4Rx Vs 2Rx	16.6.0
2020-12	RAN#90	R5-206680	0991	1	F	Update to 4.5.1.3 NSA FR1 OOS RLM in DRX to reword the Note for proper application of SNR for 4Rx Vs 2Rx	16.6.0
2020-12	RAN#90	R5-206681	0992	1	F	Update to 4.5.1.4 NSA FR1 IS RLM in DRX to reword the Note for proper application of SNR for 4Rx Vs 2Rx	16.6.0
2020-12	RAN#90	R5-206682	0993	1	F	Update to 6.5.1.1 SA FR1 OOS RLM to reword the Note for proper application of SNR for 4Rx Vs 2Rx	16.6.0
2020-12	RAN#90	R5-206683	0994	1	F	Update to 6.5.1.2 SA FR1 IS RLM to reword the Note for proper application of SNR for 4Rx Vs 2Rx	16.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-12	RAN#90	R5-206684	0995	1	F	Update to 6.5.1.3 SA FR1 OOS RLM in DRX to reword the Note for proper application of SNR for 4Rx Vs 2Rx	16.6.0
2020-12	RAN#90	R5-206685	0996	1	F	Update to 6.5.1.4 SA FR1 IS RLM in DRX to reword the Note for proper application of SNR for 4Rx Vs 2Rx	16.6.0
2020-12	RAN#90	R5-206686	0952	1	F	Update of 5.5.1 EN-DC FR2 radio link monitoring	16.6.0
2020-12	RAN#90	R5-206687	0955	1	F	Update of 5.5.5 EN-DC FR2 Beam failure detection	16.6.0
2020-12	RAN#90	R5-206688	0891	1	F	Corrections to re-selection test procedure	16.6.0
2020-12	RAN#90	R5-206689	0896	1	F	Correction of RRM TC 6.1.1.2	16.6.0
2020-12	RAN#90	R5-206690	0897	1	F	Correction of RRM TC 6.1.2.1	16.6.0
2020-12	RAN#90	R5-206691	0899	1	F	Correction of RRM TC 6.3.2.2.2	16.6.0
2020-12	RAN#90	R5-206692	0910	1	F	Correction of RRM TC 6.5.5.3	16.6.0
2020-12	RAN#90	R5-206693	0911	1	F	Correction of RRM TC 6.5.5.4	16.6.0
2020-12	RAN#90	R5-206694	0919	1	F	Editorial CR to clarify SS-RSRP dBm / 15 kHz for SA PRACH tests	16.6.0
2020-12	RAN#90	R5-206695	0942	1	F	Correction of RRM TC 6.7.2.1	16.6.0
2020-12	RAN#90	R5-206696	0961	1	F	Update of FR1 TT in 6.1.1.1 intra-freq re-selection	16.6.0
2020-12	RAN#90	R5-206697	0962	1	F	Correction of clause 6.1 cell re-selection	16.6.0
2020-12	RAN#90	R5-206698	0967	1	F	Correction to NR SA RLM out-of-sync test cases	16.6.0
2020-12	RAN#90	R5-206699	0983	1	F	Clarification in message exception for SA RLM out of synch test cases in non DRX	16.6.0
2020-12	RAN#90	R5-206700	0900	1	F	Correction of RRM TC 7.1.1.2	16.6.0
2020-12	RAN#90	R5-206701	0932	1	F	Correction of NR SA FR2 Inter-frequency measurements test case 7.6.2.5	16.6.0
2020-12	RAN#90	R5-206702	0936	1	F	Correction of NR SA FR2 RRC re-establishment test case 7.3.2.1.1	16.6.0
2020-12	RAN#90	R5-206703	0937	1	F	Correction of NR SA FR2-FR2 RRC re-establishment test case 7.3.2.1.2	16.6.0
2020-12	RAN#90	R5-206704	0957	1	F	Update of clause 7.5.5 SA FR2 Beam failure detection	16.6.0
2020-12	RAN#90	R5-206705	0958	1	F	Update of clause 7.6.1 SA FR2 Intra-frequency measurements	16.6.0
2020-12	RAN#90	R5-206706	0889	1	F	Correction of the message contents for RRM re-selection test cases	16.6.0
2020-12	RAN#90	R5-206707	0917	1	F	Correction to the aggregation level in the CORESET for RMC scheduling	16.6.0
2020-12	RAN#90	R5-206708	0938	1	F	Correction of clause 3.3 Abbreviations	16.6.0
2020-12	RAN#90	R5-206709	0963	1	F	Update of Annex H for cell re-selection	16.6.0
2020-12	RAN#90	R5-206797	0882	1	F	Complete RRM 4.5.7.1 including TT analysis results	16.6.0
2020-12	RAN#90	R5-206798	0875	1	F	Complete RRM 6.7.5.1 including TT analysis results	16.6.0
2020-12	RAN#90	R5-206799	0916	1	F	Add FR2 PRACH Test cases 7.3.2.2.1 and 7.3.2.2.2	16.6.0
2020-12	RAN#90	R5-206800	0944	1	F	Update of FR1 TT in 8.2.1.1 inter-RAT cell re-selection	16.6.0
2020-12	RAN#90	R5-206801	0945	1	F	Update of FR1 TT in 8.3.1.1 inter-RAT handover	16.6.0
2020-12	RAN#90	R5-206802	0948	1	F	Update of FR1 TT in 8.4.2.1 inter-RAT event-triggered reporting without SSB time index in non-DRX	16.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-12	RAN#90	R5-206803	0949	1	F	Update of FR1 TT in 8.4.2.2 inter-RAT event-triggered reporting without SSB time index in DRX	16.6.0
2020-12	RAN#90	R5-206804	0950	1	F	Update of FR1 TT in 8.4.2.3 inter-RAT event-triggered reporting with SSB time index in non-DRX	16.6.0
2020-12	RAN#90	R5-206805	0951	1	F	Update of FR1 TT in 8.4.2.4 inter-RAT event-triggered reporting with SSB time index in DRX	16.6.0
2020-12	RAN#90	R5-206806	0878	1	F	Annex E and F iRAT measurement accuracy tests	16.6.0
2020-12	RAN#90	R5-206807	0888	1	F	Annex E and F iRAT FR2 measurement accuracy tests	16.6.0
2020-12	RAN#90	R5-206808	0959	1	F	Update of Annex F for Test Tolerance	16.6.0
2020-12	RAN#90	R5-206834	0915	1	F	Update FR2 Downlink and Es/Noc MU values	16.6.0
2020-12	RAN#90	R5-206843	0876	1	F	Complete RRM 6.7.6.1 including TT analysis results	16.6.0
2020-12	RAN#90	R5-206844	0886	1	F	Update RRM 8.5.2.2.2 including TT analysis results	16.6.0
2020-12	RAN#90	R5-206871	0894	1	F	Correction of RRM TC 4.3.2.2.2	16.6.0
2020-12	RAN#90	R5-206872	0905	1	F	New DRX configuration for RLM TC	16.6.0
2020-12	RAN#90	R5-206895	0971	1	F	Correction to message configuration for NSA radio link monitoring CSI-RS Based in DRX mode tests	16.6.0
2020-12	RAN#90	R5-206906	0880	1	F	Complete RRM 4.7.5.1 including TT analysis results	16.6.0
2020-12	RAN#90	R5-206907	0877	1	F	Complete RRM 6.7.7.1 including TT analysis results	16.6.0
2020-12	RAN#90	R5-206908	0972	1	F	Correction to message configuration for SA radio link monitoring CSI RS Based RLM RS	16.6.0
2020-12	RAN#90	R5-206909	0887	1	F	Update RRM 8.5.2.3.2 including TT analysis results	16.6.0
2020-12	RAN#90	R5-206910	0881	1	F	Annex E and F 4.7.5.1 SFTD measurement accuracy test	16.6.0
2021-03	RAN#91	R5-210134	0999	-	F	Update of first preamble power for EN-DC TC 4.3.2.2.1 and 4.3.2.2.2	16.7.0
2021-03	RAN#91	R5-210135	1000	-	F	Update of first preamble power for SA TC 6.3.2.2.1 and 6.3.2.2.2	16.7.0
2021-03	RAN#91	R5-210136	1001	-	F	Update of UE initial state for SA RLM TC 6.5.1.x	16.7.0
2021-03	RAN#91	R5-210137	1002	-	F	Update of process delay for SFTD measurement TC 8.4.1.x	16.7.0
2021-03	RAN#91	R5-210138	1003	-	F	Update of cell frequency for TC 6.7.2.2.2	16.7.0
2021-03	RAN#91	R5-210171	1004	-	F	Editorial update of SS-RSRP for TC 6.7.1.2.1	16.7.0
2021-03	RAN#91	R5-210173	1006	-	F	Update of RRC message for TC 6.4.3.1 and 6.5.2.1	16.7.0
2021-03	RAN#91	R5-210176	1009	-	F	Update of Scell activation and CSI reporting time for EN-DC TC 5.5.3.1	16.7.0
2021-03	RAN#91	R5-210177	1010	-	F	Update of CSI reporting time for SA TC 7.5.3.1 and 7.5.3.2	16.7.0
2021-03	RAN#91	R5-210178	1011	-	F	Update of PRACH configuration for SA TC 7.3.2.2.2	16.7.0
2021-03	RAN#91	R5-210179	1012	-	F	Update of PRACH configuration for EN-DC TC 4.5.5.3 and 4.5.5.4	16.7.0
2021-03	RAN#91	R5-210180	1013	-	F	Update of PRACH configuration for EN-DC TC 5.5.5.x	16.7.0
2021-03	RAN#91	R5-210181	1014	-	F	Update of PRACH configuration for SA TC 6.5.5.3 and 6.5.5.4	16.7.0
2021-03	RAN#91	R5-210182	1015	-	F	Update of PRACH configuration for SA TC 7.5.5.x	16.7.0
2021-03	RAN#91	R5-210183	1016	-	F	Update of prach-ConfigurationIndex for FR1 PRACH configuration 4 in A.7	16.7.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-03	RAN#91	R5-210279	1017	-	F	Addition of minimum conformance requirements for R16 NR HST cell re-selection in 6.1.1.0	16.7.0
2021-03	RAN#91	R5-210281	1019	-	F	Addition of minimum conformance requirements for R16 NR HST measurement in 6.6.1.0	16.7.0
2021-03	RAN#91	R5-210283	1021	-	F	Update of Annex H.2.1-3 for R16 NR HST	16.7.0
2021-03	RAN#91	R5-210434	1025	-	F	Correct cell mapping for 5.4.3.1	16.7.0
2021-03	RAN#91	R5-210437	1027	-	F	Annex E and F 4.5.7.1 PSCell addition test	16.7.0
2021-03	RAN#91	R5-210440	1029	-	F	Update of TT analysis results in Annex F for FR2 iRAT test cases	16.7.0
2021-03	RAN#91	R5-210442	1030	-	F	Update TT results for SS-RSRP measurement accuracy test cases chapter 4	16.7.0
2021-03	RAN#91	R5-210443	1031	-	F	Update TT results for SS-RSRP measurement accuracy test cases chapter 6	16.7.0
2021-03	RAN#91	R5-210444	1032	-	F	Update TT results for SS-RSRP measurement accuracy test cases Annex F	16.7.0
2021-03	RAN#91	R5-210446	1033	-	F	Update TT results for SS-RSRQ measurement accuracy test cases chapter 4	16.7.0
2021-03	RAN#91	R5-210447	1034	-	F	Update TT results for SS-RSRQ measurement accuracy test cases chapter 6	16.7.0
2021-03	RAN#91	R5-210448	1035	-	F	Update TT results for SS-RSRQ measurement accuracy test cases Annex F	16.7.0
2021-03	RAN#91	R5-210456	1039	-	F	Update Annex I to TS 38.533	16.7.0
2021-03	RAN#91	R5-210457	1040	-	F	Update NR frequency band groups for FR1	16.7.0
2021-03	RAN#91	R5-210458	1041	-	F	Correction RLM config for event triggered test cases	16.7.0
2021-03	RAN#91	R5-210465	1046	-	F	Editorial correction of title of clause 6	16.7.0
2021-03	RAN#91	R5-210466	1047	-	F	Corrections to 6.3.2.2.1 and 6.3.2.2.2	16.7.0
2021-03	RAN#91	R5-210467	1048	-	F	Corrections to 4.3.2.2.2	16.7.0
2021-03	RAN#91	R5-210470	1049	-	F	Clarification on SSB Index to use in the PUxCH-PowerControl for RRM tests with more than one SSB	16.7.0
2021-03	RAN#91	R5-210471	1050	-	F	Clarification on SSB Index to use in the PUxCH-PowerControl for RRM tests with more than one SSB - EN-DC	16.7.0
2021-03	RAN#91	R5-210472	1051	-	F	Editorial: correct title of PRACH test cases to match RRM work plan - EN-DC FR1	16.7.0
2021-03	RAN#91	R5-210473	1052	-	F	Editorial: correct title of PRACH test cases to match RRM work plan - SA FR1	16.7.0
2021-03	RAN#91	R5-210474	1053	-	F	Editorial: correct title of PRACH test cases to match RRM work plan - SA FR2	16.7.0
2021-03	RAN#91	R5-210475	1054	-	F	Editorial: correct title of PRACH test cases to match RRM work plan - Annexes	16.7.0
2021-03	RAN#91	R5-210507	1056	-	F	Correction of test applicability for long DRX cycle related test cases in section 4	16.7.0
2021-03	RAN#91	R5-210508	1057	-	F	Correction of test applicability for long DRX cycle related test cases in section 5	16.7.0
2021-03	RAN#91	R5-210509	1058	-	F	Correction of test applicability for long DRX cycle related test cases in section 6	16.7.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-03	RAN#91	R5-210510	1059	-	F	Correction of test applicability for long DRX cycle related test cases in section 7	16.7.0
2021-03	RAN#91	R5-210511	1060	-	F	Correction of test applicability for long DRX cycle related test cases in section 8	16.7.0
2021-03	RAN#91	R5-210528	1062	-	F	Correction to test procedure in test case 6.5.1.4	16.7.0
2021-03	RAN#91	R5-210529	1063	-	F	Correction to Interruptions during measurements on deactivated NR SCC test cases	16.7.0
2021-03	RAN#91	R5-210530	1064	-	F	Correction to message configuration for NSA CSI-RS-based RLM RS test cases	16.7.0
2021-03	RAN#91	R5-210531	1065	-	F	Correction to NR SA RLM out-of-sync test cases	16.7.0
2021-03	RAN#91	R5-210532	1066	-	F	Correction to NR SA FR1 RRC Re-establishment test cases	16.7.0
2021-03	RAN#91	R5-210533	1067	-	F	Correction to 4.5.1.2 and 6.5.1.2 PDCCH Aggregation Level	16.7.0
2021-03	RAN#91	R5-210535	1069	-	F	Correction to FR1 NSA SS-SINR measurement test cases	16.7.0
2021-03	RAN#91	R5-210536	1070	-	F	Correction to L1-RSRP test cases	16.7.0
2021-03	RAN#91	R5-210537	1071	-	F	Correction to the procedure to add a step for establishing SRB2 and DRB	16.7.0
2021-03	RAN#91	R5-210538	1072	-	F	Update of DRX configuration in FR1 Event-triggered Test cases	16.7.0
2021-03	RAN#91	R5-210601	1073	-	F	Clarification of BWP1 and BWP2 in 6.6.1.3, 6.6.1.4, 6.6.1.6	16.7.0
2021-03	RAN#91	R5-210608	1077	-	F	Correction in 4.5.2.1 and 4.5.2.2 test procedure	16.7.0
2021-03	RAN#91	R5-210613	1079	-	F	Correction in SIB5 for iRAT cell reselection	16.7.0
2021-03	RAN#91	R5-210614	1080	-	F	Correction in 6.1.2.2 test procedure	16.7.0
2021-03	RAN#91	R5-210814	1085	-	F	Finalise FR2 Timing MU values	16.7.0
2021-03	RAN#91	R5-210816	1086	-	F	Update of FR2 Tx Timing Test case 5.4.1.1 Test Tolerances	16.7.0
2021-03	RAN#91	R5-210851	1089	-	F	Update of FR1 TT for 4.5.5.1 and 4.5.5.2 SSB based LR	16.7.0
2021-03	RAN#91	R5-210852	1090	-	F	Update of FR1 TT for 4.5.5.3 and 4.5.5.4 CSI-RS based LR	16.7.0
2021-03	RAN#91	R5-210853	1091	-	F	Correction to 4.6.4.3 and 4.6.4.4 L1-RSRP reporting delay	16.7.0
2021-03	RAN#91	R5-210857	1095	-	F	Update of FR1 TT for 6.5.5.1 and 6.5.5.2 SSB based LR	16.7.0
2021-03	RAN#91	R5-210858	1096	-	F	Update of FR1 TT for 6.5.5.3 and 6.5.5.4 CSI-RS based LR	16.7.0
2021-03	RAN#91	R5-210860	1098	-	F	Correction to 6.6.4.3 and 6.6.4.4 L1-RSRP reporting delay	16.7.0
2021-03	RAN#91	R5-210863	1101	-	F	Update of 6.5.3.1 SCell activation and deactivation	16.7.0
2021-03	RAN#91	R5-210864	1102	-	F	Update of D.4 antenna configuration	16.7.0
2021-03	RAN#91	R5-210866	1104	-	F	Correction to CSI-RS RMC	16.7.0
2021-03	RAN#91	R5-210867	1105	-	F	Correction to default configuration on L1-RSRP reporting in Annex H	16.7.0
2021-03	RAN#91	R5-210959	1113	-	F	Update to 6.5.4.1 NR SA FR1 UE UL carrier RRC reconfiguration delay	16.7.0
2021-03	RAN#91	R5-211049	1116	-	F	Additional of default downlink level for FR2	16.7.0
2021-03	RAN#91	R5-211219	1124	-	F	Correction of the minimum conformance requirements for Inter-RAT measurements 6.6.3.0	16.7.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-03	RAN#91	R5-211220	1125	-	F	Addition of new RRM iRAT measurement Inter-RAT measurements test case 6.6.3.3	16.7.0
2021-03	RAN#91	R5-211255	1131	-	F	Clarification of BWP1 and BWP2 in 4.6.1.3, 4.6.1.4, 4.6.1.6	16.7.0
2021-03	RAN#91	R5-211614	1007	1	F	Update of Scell activation and CSI reporting time for EN-DC TC 4.5.3.1	16.7.0
2021-03	RAN#91	R5-211615	1026	1	F	Complete RRM 4.5.7.1 including TT analysis results	16.7.0
2021-03	RAN#91	R5-211616	1087	1	F	Update Test Tolerance for FR1 RLM Test Cases	16.7.0
2021-03	RAN#91	R5-211617	1092	1	F	Correction to EN-DC radio link monitoring	16.7.0
2021-03	RAN#91	R5-211618	1093	1	F	Update of 4.5.3.1 SCell activation and deactivation	16.7.0
2021-03	RAN#91	R5-211619	1108	1	F	Update to 4.5.4.1 EN-DC FR1 UE UL carrier RRC reconfiguration delay	16.7.0
2021-03	RAN#91	R5-211620	1109	1	F	Update to 4.7.5.1 EN-DC FR1 SFTD measurement accuracy	16.7.0
2021-03	RAN#91	R5-211621	1117	1	F	Correction of applied TT for EN-DC FR1 L1-RSRP measurement test cases	16.7.0
2021-03	RAN#91	R5-211622	1023	1	F	Update 5.4.3.1 with TT analysis results	16.7.0
2021-03	RAN#91	R5-211623	1119	1	F	Correction of EN-DC FR2 inter-freq measurement test case 5.6.2.1 including TT	16.7.0
2021-03	RAN#91	R5-211624	1120	1	F	Correction of EN-DC FR2 inter-freq measurement test case 5.6.2.3 including TT	16.7.0
2021-03	RAN#91	R5-211625	1008	1	F	Update of CSI reporting time for SA TC 6.5.3.1	16.7.0
2021-03	RAN#91	R5-211626	1094	1	F	Correction to SA radio link monitoring	16.7.0
2021-03	RAN#91	R5-211627	1110	1	F	Update to 6.3.2.2.1 Contention based random access test in FR1 for NR standalone	16.7.0
2021-03	RAN#91	R5-211628	1111	1	F	Update to 6.3.2.2.2 Non-Contention based random access test in FR1 for NR standalone	16.7.0
2021-03	RAN#91	R5-211629	1112	1	F	Update to 6.5.2.1 NR SA FR1 interruptions during measurements on deactivated NR SCC	16.7.0
2021-03	RAN#91	R5-211630	1114	1	F	Update to 6.6.3.1 NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX	16.7.0
2021-03	RAN#91	R5-211631	1115	1	F	Update to 6.6.3.2 NR SA FR1 - E-UTRAN event-triggered reporting in DRX	16.7.0
2021-03	RAN#91	R5-211632	1118	1	F	Correction of applied TT for SA FR1 L1-RSRP measurement test cases	16.7.0
2021-03	RAN#91	R5-211633	1121	1	F	Correction of SA FR2 inter-freq measurement test case 7.6.2.1 including TT	16.7.0
2021-03	RAN#91	R5-211634	1122	1	F	Correction of SA FR2 inter-freq measurement test case 7.6.2.3 including TT	16.7.0
2021-03	RAN#91	R5-211635	1028	1	F	Complete FR2 iRAT measurement accuracy test cases	16.7.0
2021-03	RAN#91	R5-211636	1024	1	F	Update Annex F for 5.4.3.1 and 7.4.3.1 with TT analysis results	16.7.0
2021-03	RAN#91	R5-211637	1038	1	F	Update DL AWGN MU for RRM FR2	16.7.0
2021-03	RAN#91	R5-211638	1084	1	F	Update FR2 Downlink and Uplink MU values	16.7.0
2021-03	RAN#91	R5-211639	1103	1	F	Update of Annex F for Test Tolerance	16.7.0
2021-03	RAN#91	R5-211640	1123	1	F	Correction of MTSU and applied TT in Annex F	16.7.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-03	RAN#91	R5-211641	1130	1	F	Addition of new RMCs and OCNGs into Annex A	16.7.0
2021-03	RAN#91	R5-211722	1042	1	F	Correction EN-DC FR1 timing tests	16.7.0
2021-03	RAN#91	R5-211723	1043	1	F	Corrections to 5.4.1.1	16.7.0
2021-03	RAN#91	R5-211724	1061	1	F	Clarification of SNR for 4RX UE in RLM Test Cases	16.7.0
2021-03	RAN#91	R5-211725	1076	1	F	Correction in 4.7.3.2.1 test parameters	16.7.0
2021-03	RAN#91	R5-211726	1005	1	F	Update of RRC message for TC 6.3.1.4, 6.3.1.5 and 6.3.2.3.2	16.7.0
2021-03	RAN#91	R5-211727	1045	1	F	Corrections NR SA FR1 timing test cases	16.7.0
2021-03	RAN#91	R5-211728	1097	1	F	Correction to NR TC 6.6.3.2-Inter-RAT DRX	16.7.0
2021-03	RAN#91	R5-211729	1099	1	F	Update of 6.5.1.2 and 6.5.1.4 SSB based RLM	16.7.0
2021-03	RAN#91	R5-211730	1083	1	F	Clarification of BWP1 and BWP2 in 7.6.1.3 and 7.6.1.4	16.7.0
2021-03	RAN#91	R5-211731	1044	1	F	Addition of Serving Cell Config for RRM timing test cases	16.7.0
2021-03	RAN#91	R5-211827	1018	1	F	Addition of new test case 6.1.1.7 for R16 NR HST	16.7.0
2021-03	RAN#91	R5-211828	1020	1	F	Addition of new test case 6.6.1.7 for R16 NR HST	16.7.0
2021-03	RAN#91	R5-211829	1022	1	F	Addition of cell configuration mapping in Annex E for R16 NR HST	16.7.0
2021-03	RAN#91	R5-211830	1126	1	F	Correction of the minimum conformance requirements for E-UTRA - NR FR1 Cell reselection 8.2.1.0	16.7.0
2021-03	RAN#91	R5-211831	1127	1	F	Addition of new RRM E-UTRA - NR FR1 Cell reselection test case 8.2.1.2	16.7.0
2021-03	RAN#91	R5-211832	1128	1	F	Correction of the minimum conformance requirements for E-UTRA - NR Inter-RAT event triggered reporting tests 8.4.2.0	16.7.0
2021-03	RAN#91	R5-211833	1129	1	F	Addition of new RRM E-UTRA - NR Inter-RAT event triggered reporting test case 8.4.2.9	16.7.0
2021-03	RAN#91	R5-211889	1036	1	F	Update TT results for 6.3.1.1	16.7.0
2021-03	RAN#91	R5-211890	1037	1	F	Update TT results for 6.3.1.1 Annex F	16.7.0
2021-06	RAN#92	R5-212024	1132	-	F	Complete 5.7.1.1 with TT analysis results	16.8.0
2021-06	RAN#92	R5-212025	1133	-	F	Complete 5.7.2.1 with TT analysis results	16.8.0
2021-06	RAN#92	R5-212026	1134	-	F	Complete 5.7.3.1 with TT analysis results	16.8.0
2021-06	RAN#92	R5-212256	1138	-	F	Core alignment of TCI state of CSI-RS for TRS	16.8.0
2021-06	RAN#92	R5-212257	1139	-	F	Introducing additional band for n38	16.8.0
2021-06	RAN#92	R5-212265	1147	-	F	Updates to DRX configuration in FR1 Event-triggered Test cases	16.8.0
2021-06	RAN#92	R5-212266	1148	-	F	Core alignment of BWP configuration parameter in 6.5.2.1	16.8.0
2021-06	RAN#92	R5-212267	1149	-	F	Correction to CSI-RS based L1-RSRP measurement tests	16.8.0
2021-06	RAN#92	R5-212612	1153	-	F	Addition of new test case 6.6.4.5 for R16 NR HST	16.8.0
2021-06	RAN#92	R5-212613	1154	-	F	Addition of cell configuration mapping in Annex E for TC 6.6.4.5	16.8.0
2021-06	RAN#92	R5-212712	1158	-	F	Remove obsolete message contents tables after Chapter 7 alignment	16.8.0
2021-06	RAN#92	R5-212715	1161	-	F	Correcting measurement accuracy iRAT test cases	16.8.0
2021-06	RAN#92	R5-212716	1162	-	F	Corrections to 5.4.1.1	16.8.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-06	RAN#92	R5-212717	1163	-	F	Corrections to 5.4.3.1	16.8.0
2021-06	RAN#92	R5-212718	1164	-	F	Corrections to 4.4.1.1	16.8.0
2021-06	RAN#92	R5-212719	1165	-	F	Corrections to 4.4.3.1	16.8.0
2021-06	RAN#92	R5-212720	1166	-	F	Corrections to 6.4.1.1	16.8.0
2021-06	RAN#92	R5-212721	1167	-	F	Corrections to 6.4.3.1	16.8.0
2021-06	RAN#92	R5-212726	1171	-	F	Correct applicability of Interruption EN-DC test cases with CA	16.8.0
2021-06	RAN#92	R5-212727	1172	-	F	Correct applicability of Scell activation EN-DC test cases with CA	16.8.0
2021-06	RAN#92	R5-212728	1173	-	F	Correct applicability of Interruption SA test cases with CA	16.8.0
2021-06	RAN#92	R5-212729	1174	-	F	Correct applicability of Scell activation SA test cases with CA	16.8.0
2021-06	RAN#92	R5-212731	1175	-	F	Addition of RRM FR2 EN-DC PRACH test case 5.3.2.2.1	16.8.0
2021-06	RAN#92	R5-212732	1176	-	F	Addition of RRM FR2 EN-DC PRACH test case 5.3.2.2.2	16.8.0
2021-06	RAN#92	R5-212737	1177	-	F	Update to test applicability of RRM TC6.5.4.1	16.8.0
2021-06	RAN#92	R5-212745	1178	-	F	Update to RRM Antenna connection for 4Rx capable Ues	16.8.0
2021-06	RAN#92	R5-212895	1180	-	F	Correction to FR1 EN-DC interruption during SCell measurement test cases	16.8.0
2021-06	RAN#92	R5-212896	1181	-	F	Correction to FR1 EN-DC beam failure recovery test cases	16.8.0
2021-06	RAN#92	R5-212900	1185	-	F	Correction to FR1 NR SA TC 6.5.3.1-SCell activation	16.8.0
2021-06	RAN#92	R5-212901	1186	-	F	Correction to FR1 NR SA beam failure recovery test cases	16.8.0
2021-06	RAN#92	R5-212904	1189	-	F	Correction to RMSI CORESET reference configuration in Annex A	16.8.0
2021-06	RAN#92	R5-212905	1190	-	F	Correction to CSI-RS reference configuration in annex A	16.8.0
2021-06	RAN#92	R5-212906	1191	-	F	Correction to TRS reference configuration in annex A	16.8.0
2021-06	RAN#92	R5-212909	1194	-	F	Correction to BWP reference configuration in Annex A	16.8.0
2021-06	RAN#92	R5-212910	1195	-	F	Correction of minimum requirements for L1-RSRP reporting test cases	16.8.0
2021-06	RAN#92	R5-212911	1196	-	F	Addition of FR1 EN-DC TC 4.6.4.5-HST L1-RSRP	16.8.0
2021-06	RAN#92	R5-213183	1205	-	F	Extension of Annex I for EIS spherical coverage points	16.8.0
2021-06	RAN#92	R5-213227	1212	-	F	Correction of SA FR2 inter-freq measurement test case 7.6.2.5 including TT	16.8.0
2021-06	RAN#92	R5-213228	1213	-	F	Correction of SA FR2 inter-freq measurement test case 7.6.2.6 including TT	16.8.0
2021-06	RAN#92	R5-213229	1214	-	F	Correction of SA FR2 inter-freq measurement test case 7.6.2.7 including TT	16.8.0
2021-06	RAN#92	R5-213230	1215	-	F	Correction of SA FR2 inter-freq measurement test case 7.6.2.8 including TT	16.8.0
2021-06	RAN#92	R5-213240	1219	-	F	Test frequency selection for Inter-frequency RRM test cases in Annex E	16.8.0
2021-06	RAN#92	R5-213345	1222	-	F	Update on iRAT measurement 6.6.3.2 test case	16.8.0
2021-06	RAN#92	R5-213346	1223	-	F	Update on Annex H.3.1 for iRAT measurement	16.8.0
2021-06	RAN#92	R5-213351	1224	-	F	Correction to Coreset and Search Space RMC for FR2 RRM	16.8.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-06	RAN#92	R5-213352	1225	-	F	Correction to Message Exceptions for 6.3.2.2.2 Non-contention based random access test in FR1	16.8.0
2021-06	RAN#92	R5-213353	1226	-	F	Correction to PDSCH RMC when DRX is configured	16.8.0
2021-06	RAN#92	R5-213354	1227	-	F	Correction to intra and inter frequency reselection test cases with asynchronous cells	16.8.0
2021-06	RAN#92	R5-213847	1179	1	F	Addition of inter-frequency measurements configuration for FR1 EN-DC BFD and RLM test cases	16.8.0
2021-06	RAN#92	R5-213848	1183	1	F	Addition of inter-frequency measurements configuration for FR1 NR SA BFD and RLM test cases	16.8.0
2021-06	RAN#92	R5-213849	1184	1	F	Correction to FR1 NR SA interruption during SCell measurement test cases	16.8.0
2021-06	RAN#92	R5-213850	1193	1	F	Correction to PRACH reference configuration in Annex H	16.8.0
2021-06	RAN#92	R5-213921	1145	1	F	Correction to test procedure for SSB-based L1-RSRP measurement reporting	16.8.0
2021-06	RAN#92	R5-213922	1159	1	F	Remove obsolete message contents tables after Chapter 7 alignment - EN-DC	16.8.0
2021-06	RAN#92	R5-213923	1168	1	F	Corrections to RLM test cases EN-DC	16.8.0
2021-06	RAN#92	R5-213924	1141	1	F	Correction to FR2 RRM test channel reference for Event triggered reporting test	16.8.0
2021-06	RAN#92	R5-213925	1142	1	F	Correction to FR2 RRM test channel reference for RLM and BFD tests	16.8.0
2021-06	RAN#92	R5-213926	1143	1	F	Correction to FR2 RRM test channel reference for UL timing test	16.8.0
2021-06	RAN#92	R5-213927	1208	1	F	Correction of EN-DC FR2 inter-freq measurement test case 5.6.2.5 including TT	16.8.0
2021-06	RAN#92	R5-213928	1209	1	F	Correction of EN-DC FR2 inter-freq measurement test case 5.6.2.6 including TT	16.8.0
2021-06	RAN#92	R5-213929	1210	1	F	Correction of EN-DC FR2 inter-freq measurement test case 5.6.2.7 including TT	16.8.0
2021-06	RAN#92	R5-213930	1211	1	F	Correction of EN-DC FR2 inter-freq measurement test case 5.6.2.8 including TT	16.8.0
2021-06	RAN#92	R5-213931	1156	1	F	Correct reference to cell mapping for SA test cases	16.8.0
2021-06	RAN#92	R5-213932	1160	1	F	Correcting typos in PRACH test case	16.8.0
2021-06	RAN#92	R5-213933	1169	1	F	Corrections to RLM test cases SA	16.8.0
2021-06	RAN#92	R5-213934	1135	1	F	Annex F for EN-DC and SA FR2 Measurement Accuracy	16.8.0
2021-06	RAN#92	R5-213935	1157	1	F	Align Annex H of TS 38.533 to Clause 7 of TS 38.508-1	16.8.0
2021-06	RAN#92	R5-213936	1202	1	F	Correction to AoA Test Setup applicability per permitted test method	16.8.0
2021-06	RAN#92	R5-213937	1204	1	F	Adapt Annex F to indicate applicability of the RRM FR2 TT analysis results	16.8.0
2021-06	RAN#92	R5-213938	1207	1	F	Correction of MTSU and applied TT in Annex F for FR2 inter-freq measurement test cases	16.8.0
2021-06	RAN#92	R5-214009	1151	1	F	Addition of 5G-SRVCC RRM TC 6.3.1.6-handover	16.8.0
2021-06	RAN#92	R5-214010	1152	1	F	Addition of 5G-SRVCC RRM TC 6.6.5.1-envent triggered reporting non-DRX	16.8.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-06	RAN#92	R5-214060	1182	1	F	Correction to FR1 EN-DC BWP switching test cases	16.8.0
2021-06	RAN#92	R5-214061	1198	1	F	Update of CSI reporting time for EN-DC FR1 TC 4.5.3.1	16.8.0
2021-06	RAN#92	R5-214062	1199	1	F	Update of CSI reporting time for EN-DC FR2 TC 5.5.3.1	16.8.0
2021-06	RAN#92	R5-214063	1203	1	F	Adapt RRM FR2 test cases to indicate applicability of the TT analysis results	16.8.0
2021-06	RAN#92	R5-214064	1146	1	F	Corrections to NR SA FR1 RRC Re-establishment tests	16.8.0
2021-06	RAN#92	R5-214065	1187	1	F	Correction to FR1 NR SA BWP switch test cases	16.8.0
2021-06	RAN#92	R5-214066	1200	1	F	Update of CSI reporting time for SA FR1 TC 6.5.3.1	16.8.0
2021-06	RAN#92	R5-214067	1201	1	F	Update of CSI reporting time for SA FR2 TC 7.5.3.1 and 7.5.3.2	16.8.0
2021-06	RAN#92	R5-214068	1188	1	F	Correction to NR inter-RAT measurement test cases	16.8.0
2021-06	RAN#92	R5-214090	1197	1	F	Correction to Annex A.9 on the selection of test direction	16.8.0
2021-06	RAN#92	R5-214091	1206	1	F	Extension of the RSRPB Rx Beak Peak Search method	16.8.0
2021-06	RAN#92	R5-214092	1221	1	F	Update on test frequencies selection for inter-frequency test cases	16.8.0
2021-06	RAN#92	R5-214108	1216	1	F	Correction of EN-DC FR2 inter-freq measurement test case 5.6.2.1 and 5.6.2.3	16.8.0
2021-06	RAN#92	R5-214109	1217	1	F	Correction of SA FR2 inter-freq measurement test case 7.6.2.1 and 7.6.2.3	16.8.0
2021-06	RAN#92	R5-214111	1144	1	F	Correction to Interruptions during measurements on deactivated NR SCC	16.8.0
2021-06	RAN#92	R5-214113	1140	1	F	Correction to FR2 event-triggered reporting of intra frequency cell	16.8.0
2021-09	RAN#93	R5-214195	1232	-	F	Completion 7.7.2.2 including TT analysis results	16.9.0
2021-09	RAN#93	R5-214197	1234	-	F	Annex E and F update for FR2 inter-frequency periodic measurements tests	16.9.0
2021-09	RAN#93	R5-214198	1235	-	F	Completion 7.7.1.1	16.9.0
2021-09	RAN#93	R5-214199	1236	-	F	Completion 7.7.2.1	16.9.0
2021-09	RAN#93	R5-214200	1237	-	F	Completion 7.7.3.1	16.9.0
2021-09	RAN#93	R5-214339	1239	-	F	Correction to 4.5.1.1 message contents and core spec alignment	16.9.0
2021-09	RAN#93	R5-214342	1242	-	F	Correction to 4.5.1.4 core spec alignment	16.9.0
2021-09	RAN#93	R5-214343	1243	-	F	Correction to 4.5.1.5 message contents and core spec alignment	16.9.0
2021-09	RAN#93	R5-214345	1245	-	F	Correction to 4.4.1.1 and core spec alignment	16.9.0
2021-09	RAN#93	R5-214347	1247	-	F	Editorial corrections and core spec alignment for 5.7.1.1	16.9.0
2021-09	RAN#93	R5-214348	1248	-	F	Editorial corrections and core spec alignment for 5.7.2.1	16.9.0
2021-09	RAN#93	R5-214349	1249	-	F	Editorial corrections and core spec alignment for 5.7.3.1	16.9.0
2021-09	RAN#93	R5-214350	1250	-	F	Core spec alignment for 5.6.1.1	16.9.0
2021-09	RAN#93	R5-214351	1251	-	F	Core spec alignment for 5.6.1.2	16.9.0
2021-09	RAN#93	R5-214352	1252	-	F	Core spec alignment for 5.6.1.3	16.9.0
2021-09	RAN#93	R5-214353	1253	-	F	Core spec alignment for 5.6.1.4	16.9.0
2021-09	RAN#93	R5-214354	1254	-	F	Correction to 5.6.2.1 message contents	16.9.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-09	RAN#93	R5-214355	1255	-	F	Correction to 5.6.2.2 message contents	16.9.0
2021-09	RAN#93	R5-214356	1256	-	F	Correction to 5.6.2.3 message contents	16.9.0
2021-09	RAN#93	R5-214357	1257	-	F	Correction to 5.6.2.4 message contents	16.9.0
2021-09	RAN#93	R5-214358	1258	-	F	Correction to 5.6.2.5 message contents	16.9.0
2021-09	RAN#93	R5-214359	1259	-	F	Correction to 5.6.2.6 message contents	16.9.0
2021-09	RAN#93	R5-214360	1260	-	F	Correction to 5.6.2.7 message contents	16.9.0
2021-09	RAN#93	R5-214361	1261	-	F	Correction to 5.6.2.8 message contents	16.9.0
2021-09	RAN#93	R5-214363	1263	-	F	Correction to 6.5.1.1 message contents and core spec alignment	16.9.0
2021-09	RAN#93	R5-214365	1265	-	F	Correction to 6.5.1.5 message contents and core spec alignment	16.9.0
2021-09	RAN#93	R5-214367	1267	-	F	Correction to 6.3.1.6 and core spec alignment	16.9.0
2021-09	RAN#93	R5-214368	1268	-	F	Correction to 6.5.2.1 and core spec alignment	16.9.0
2021-09	RAN#93	R5-214370	1270	-	F	Correction to 6.7.5.1 and core spec alignment	16.9.0
2021-09	RAN#93	R5-214371	1271	-	F	Correction to 6.7.6.1 and core spec alignment	16.9.0
2021-09	RAN#93	R5-214372	1272	-	F	Correction to 6.7.7.1 and core spec alignment	16.9.0
2021-09	RAN#93	R5-214373	1273	-	F	Core spec alignment for 7.6.1.1	16.9.0
2021-09	RAN#93	R5-214374	1274	-	F	Core spec alignment for 7.6.1.2	16.9.0
2021-09	RAN#93	R5-214375	1275	-	F	Core spec alignment for 7.6.1.3	16.9.0
2021-09	RAN#93	R5-214376	1276	-	F	Core spec alignment for 7.6.1.4	16.9.0
2021-09	RAN#93	R5-214378	1278	-	F	Correction to 8.3.1.1 and core spec alignment	16.9.0
2021-09	RAN#93	R5-214395	1280	-	F	Addition of FR1 mobility enhancement TC 6.3.1.9-Intra-band inter-frequency sync DAPS HO in SA for FR1	16.9.0
2021-09	RAN#93	R5-214407	1281	-	F	Clarification of test procedure for 4.3.2.2.1	16.9.0
2021-09	RAN#93	R5-214408	1282	-	F	Corrections to 4.7.1.x.y SS-RSRP test cases	16.9.0
2021-09	RAN#93	R5-214409	1283	-	F	Corrections to 4.7.2.x SS-RSRQ test cases	16.9.0
2021-09	RAN#93	R5-214410	1284	-	F	Corrections to 4.7.3.x SS-SINR test cases	16.9.0
2021-09	RAN#93	R5-214411	1285	-	F	Corrections to 4.5.1.6	16.9.0
2021-09	RAN#93	R5-214412	1286	-	F	Corrections to 4.5.1.8	16.9.0
2021-09	RAN#93	R5-214413	1287	-	F	Core spec alignment of EN-DC FR2 PRACH	16.9.0
2021-09	RAN#93	R5-214414	1288	-	F	Corrections to 6.5.1.2	16.9.0
2021-09	RAN#93	R5-214415	1289	-	F	Corrections to 6.5.1.4	16.9.0
2021-09	RAN#93	R5-214416	1290	-	F	Corrections to 6.7.1.x.y SS-RSRP test cases	16.9.0
2021-09	RAN#93	R5-214417	1291	-	F	Corrections to 6.7.2.x SS-RSRQ test cases	16.9.0
2021-09	RAN#93	R5-214418	1292	-	F	Corrections to 6.7.3.x SS-SINR test cases	16.9.0
2021-09	RAN#93	R5-214419	1293	-	F	Corrections to 6.5.1.6	16.9.0
2021-09	RAN#93	R5-214420	1294	-	F	Corrections to 6.5.1.8	16.9.0
2021-09	RAN#93	R5-214421	1295	-	F	Align 6.3.2.2.x to core spec	16.9.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-09	RAN#93	R5-214422	1296	-	F	Align 6.4.3.1 to core spec	16.9.0
2021-09	RAN#93	R5-214423	1297	-	F	Align 6.6.2.x to core spec	16.9.0
2021-09	RAN#93	R5-214424	1298	-	F	Align 6.6.3.x to core spec	16.9.0
2021-09	RAN#93	R5-214426	1300	-	F	Correction to Table H.3.5-9	16.9.0
2021-09	RAN#93	R5-214427	1301	-	F	Clarification CSI-ReportConfig from Annex H	16.9.0
2021-09	RAN#93	R5-214519	1302	-	F	Addition of FR1 mobility enhancement TC 6.3.1.10-Intra-band inter-frequency asynchronous DAPS HO in SA for FR1	16.9.0
2021-09	RAN#93	R5-214520	1303	-	F	Addition of FR1 mobility enhancement TC 6.3.1.11-Inter-band inter-frequency sync DAPS HO in SA for FR1	16.9.0
2021-09	RAN#93	R5-214521	1304	-	F	Addition of FR1 mobility enhancement TC 6.3.1.12-Inter-band inter-frequency asynchronousDAPS HO in SA for FR1	16.9.0
2021-09	RAN#93	R5-214522	1305	-	F	Update of applicability for RLM TC 4.6.1.3 and 4.6.1.6	16.9.0
2021-09	RAN#93	R5-214525	1308	-	F	Update of applicability for RLM TC 6.6.1.3 and 6.6.1.6	16.9.0
2021-09	RAN#93	R5-214526	1309	-	F	Correction of cell configuration for SA FR1 TC 6.3.2.1.2 and 6.3.2.1.3	16.9.0
2021-09	RAN#93	R5-214527	1310	-	F	Correction of specific message content for SA FR2 TC 7.6.1.4	16.9.0
2021-09	RAN#93	R5-214528	1311	-	F	Correction of cell configuration for SA FR2 TC 7.3.2.1.1, 7.3.2.1.2 and 7.3.2.1.3	16.9.0
2021-09	RAN#93	R5-214529	1312	-	F	Update of TCI configuration for SA FR2 TC 7.6.2.1 and 7.6.2.3	16.9.0
2021-09	RAN#93	R5-214530	1313	-	F	Correction of non-existent config for SA FR2 TC 7.7.1.3.1	16.9.0
2021-09	RAN#93	R5-214681	1319	-	F	Core alignment for DRX configuration	16.9.0
2021-09	RAN#93	R5-214682	1320	-	F	Correction to FR2 event-triggered reporting in DRX test cases	16.9.0
2021-09	RAN#93	R5-214685	1323	-	F	Correction to Inter-RAT SFTD measurement delay and event triggered reporting tests	16.9.0
2021-09	RAN#93	R5-214687	1325	-	F	Correction to 4.5.7.1EN-DC FR1 addition and release delay of known PSCell	16.9.0
2021-09	RAN#93	R5-214688	1326	-	F	Correction to NR SA FR1 - E-UTRAN event-triggered reporting tests	16.9.0
2021-09	RAN#93	R5-214689	1327	-	F	Correction to the number of entries in the measObjectToAddModList	16.9.0
2021-09	RAN#93	R5-214693	1331	-	F	Clean up on editor notes for FR2 test cases	16.9.0
2021-09	RAN#93	R5-214711	1335	-	F	Add minimum conformance requirements for DAPS handover	16.9.0
2021-09	RAN#93	R5-214832	1337	-	F	Correction to 5G-SRVCC RRM TC 6.3.1.6-handover	16.9.0
2021-09	RAN#93	R5-214833	1338	-	F	Correction to 5G-SRVCC RRM TC 6.6.5.1-envent triggered reporting non-DRX	16.9.0
2021-09	RAN#93	R5-214921	1340	-	F	Alignment HO test case 6.3.1.2 with core requirements	16.9.0
2021-09	RAN#93	R5-214922	1341	-	F	Correction re-establishment test cases 6.3.2.1.x	16.9.0
2021-09	RAN#93	R5-214923	1342	-	F	Remove gapUE and gapFR1 from iRAT test cases	16.9.0
2021-09	RAN#93	R5-214924	1343	-	F	Annex A.6.1 for iRAT test cases	16.9.0
2021-09	RAN#93	R5-214948	1344	-	F	Addition of FR-1 NSA CLI Measurement test cases	16.9.0
2021-09	RAN#93	R5-214983	1349	-	F	Correction to FR1 EN-DC TCs-RLM	16.9.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-09	RAN#93	R5-214985	1351	-	F	Correction to FR2 EN-DC TCs-RLM	16.9.0
2021-09	RAN#93	R5-214986	1352	-	F	Correction to FR2 EN-DC TCs-SCell activation	16.9.0
2021-09	RAN#93	R5-214987	1353	-	F	Correction to FR1 NR SA TC 6.5.2.1-SCell interruption	16.9.0
2021-09	RAN#93	R5-214989	1355	-	F	Correction to FR1 NR SA TCs-cell reselection	16.9.0
2021-09	RAN#93	R5-214991	1357	-	F	Correction to FR1 NR SA TCs-RLM	16.9.0
2021-09	RAN#93	R5-214993	1359	-	F	Correction to FR2 NR SA TCs-cell reselection	16.9.0
2021-09	RAN#93	R5-214994	1360	-	F	Correction to FR2 NR SA TCs-SCell activation	16.9.0
2021-09	RAN#93	R5-214996	1362	-	F	Correction to LTE SA TCs-cell reselection	16.9.0
2021-09	RAN#93	R5-214997	1363	-	F	Correction to LTE SA TCs-inter-RAT delay	16.9.0
2021-09	RAN#93	R5-214999	1365	-	F	Correction to cell mapping for CA TCs	16.9.0
2021-09	RAN#93	R5-215005	1367	-	F	Addition of minimum requirements for FR1 CHO	16.9.0
2021-09	RAN#93	R5-215006	1368	-	F	Addition of minimum requirements for FR2 CHO	16.9.0
2021-09	RAN#93	R5-215007	1369	-	F	Addition of NR Mob_Enh RRM TC 6.3.1.7-intra freq sync DAPS HO	16.9.0
2021-09	RAN#93	R5-215008	1370	-	F	Addition of NR Mob_Enh RRM TC 6.3.1.8-intra freq async DAPS HO	16.9.0
2021-09	RAN#93	R5-215009	1371	-	F	Addition of NR Mob_Enh RRM TC 6.3.3.1-intra freq CHO	16.9.0
2021-09	RAN#93	R5-215010	1372	-	F	Addition of NR Mob_Enh RRM TC 6.3.3.2-inter freq CHO	16.9.0
2021-09	RAN#93	R5-215011	1373	-	F	Addition of NR Mob_Enh RRM TC 7.3.1.4-inter band sync DAPS HO	16.9.0
2021-09	RAN#93	R5-215012	1374	-	F	Addition of NR Mob_Enh RRM TC 7.3.1.5-inter band async DAPS HO	16.9.0
2021-09	RAN#93	R5-215013	1375	-	F	Addition of NR Mob_Enh RRM TC 7.3.3.1-intra freq CHO	16.9.0
2021-09	RAN#93	R5-215014	1376	-	F	Addition of NR Mob_Enh RRM TC 7.3.3.2-inter freq CHO	16.9.0
2021-09	RAN#93	R5-215020	1378	-	F	Addition of minimum requirements for inter-freq relaxed measurement	16.9.0
2021-09	RAN#93	R5-215022	1380	-	F	Addition of minimum requirements for intra-freq relaxed measurement	16.9.0
2021-09	RAN#93	R5-215023	1381	-	F	Addition of NR PS RRM TC 6.1.1.3 - intra-freq cell reselection low mobility	16.9.0
2021-09	RAN#93	R5-215024	1382	-	F	Addition of NR PS RRM TC 6.1.1.4 - intra-freq cell reselection non-cell-edge	16.9.0
2021-09	RAN#93	R5-215025	1383	-	F	Addition of NR PS RRM TC 6.1.1.5 - inter-freq cell reselection low mobility	16.9.0
2021-09	RAN#93	R5-215026	1384	-	F	Addition of NR PS RRM TC 6.1.1.6 - inter-freq cell reselection non-cell-edge	16.9.0
2021-09	RAN#93	R5-215036	1388	-	F	Correction to minimum requirements for inter-RAT cell reselection with highSpeedMeasFlag	16.9.0
2021-09	RAN#93	R5-215037	1389	-	F	Correction to minimum requirements for intra-frequency measurement with highSpeedMeasFlag	16.9.0
2021-09	RAN#93	R5-215038	1390	-	F	Correction to NR HST RRM TC 6.1.1.7-HST intra-freq cell reselection	16.9.0
2021-09	RAN#93	R5-215039	1391	-	F	Addition of cell mapping for NR HST RRM TCs	16.9.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-09	RAN#93	R5-215243	1398	-	F	Update of test case 6.6.4.5 for R16 NR HST	16.9.0
2021-09	RAN#93	R5-215244	1399	-	F	Editorial change of RRM test case 6.6.1.7	16.9.0
2021-09	RAN#93	R5-215352	1401	-	F	Correction to test frequeny selection for intra-band EN-DC	16.9.0
2021-09	RAN#93	R5-215354	1403	-	F	Correction to test requirement for 8.4.2.4 and error in writing for 8.4.2.x	16.9.0
2021-09	RAN#93	R5-215355	1404	-	F	Correction to DRX configuration for eliminating overlap between DRX and SMTC	16.9.0
2021-09	RAN#93	R5-215360	1405	-	F	Correction to test case 6.3.1.1 and 6.3.1.3	16.9.0
2021-09	RAN#93	R5-215365	1406	-	F	Core spec alignment to add CCR configuration for EN-DC PRACH	16.9.0
2021-09	RAN#93	R5-215366	1407	-	F	Core spec alignment to add CCR configuration for EN-DC Timing	16.9.0
2021-09	RAN#93	R5-215367	1408	-	F	Core spec alignment to add CCR configuration for EN-DC event triggered	16.9.0
2021-09	RAN#93	R5-215368	1409	-	F	Addition of minimum conformance requirements of cell re-selection with relaxed measurement criterion in FR2	16.9.0
2021-09	RAN#93	R5-215392	1410	-	F	Add test case 4.3.2.2.3 for EN-DC FR1 2-step PRACH	16.9.0
2021-09	RAN#93	R5-215393	1411	-	F	Add test case 4.3.2.2.4 for EN-DC FR1 2-step PRACH	16.9.0
2021-09	RAN#93	R5-215394	1412	-	F	Add test case 5.3.2.2.3 for EN-DC FR2 2-step PRACH	16.9.0
2021-09	RAN#93	R5-215395	1413	-	F	Add test case 5.3.2.2.4 for EN-DC FR2 2-step PRACH	16.9.0
2021-09	RAN#93	R5-215396	1414	-	F	Add test case 6.3.2.2.3 for SA FR1 2-step PRACH	16.9.0
2021-09	RAN#93	R5-215397	1415	-	F	Add test case 6.3.2.2.4 for SA FR1 2-step PRACH	16.9.0
2021-09	RAN#93	R5-215398	1416	-	F	Add 2-Step PRACH test cases to Annex E	16.9.0
2021-09	RAN#93	R5-215412	1417	-	F	Addition of cell configuration for RRM HST test cases in Annex E	16.9.0
2021-09	RAN#93	R5-215413	1418	-	F	Correction of RRM HST Inter-RAT measurements test case 6.6.3.3	16.9.0
2021-09	RAN#93	R5-215414	1419	-	F	Correction of RRM HST E-UTRA NR FR1 Cell reselection test case 8.2.1.2	16.9.0
2021-09	RAN#93	R5-215415	1420	-	F	Correction of RRM HST E-UTRA NR Inter-RAT event triggered reporting test case 8.4.2.9	16.9.0
2021-09	RAN#93	R5-215420	1425	-	F	Correction of RRM EN-DC FR2 CSI-RS-based L1-RSRP measurement in DRX test case 5.6.3.4	16.9.0
2021-09	RAN#93	R5-215425	1430	-	F	Correction of RRM EN-DC FR2-FR2 event-triggered reporting in DRX test case 5.6.2.2 including Test Tolerance	16.9.0
2021-09	RAN#93	R5-215426	1431	-	F	Correction of RRM EN-DC FR2-FR2 event-triggered reporting in DRX with SSB time index detection test case 5.6.2.4 including Test Tolerance	16.9.0
2021-09	RAN#93	R5-215427	1432	-	F	Correction of RRM SA FR2-FR2 event-triggered reporting in DRX test case 7.6.2.2 including Test Tolerance	16.9.0
2021-09	RAN#93	R5-215428	1433	-	F	Correction of RRM SA FR2-FR2 event-triggered reporting in DRX with SSB time index detection test case 7.6.2.4 including Test Tolerance	16.9.0
2021-09	RAN#93	R5-215429	1434	-	F	Editorial correction of RRM FR2 EN-DC event triggered measurement test cases	16.9.0
2021-09	RAN#93	R5-215430	1435	-	F	Editorial correction of RRM FR2 SA event triggered measurement test cases	16.9.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-09	RAN#93	R5-215431	1436	-	F	Correction of Measurement Uncertainty and Test Tolerance in Annex F for RRM test cases	16.9.0
2021-09	RAN#93	R5-215436	1437	-	F	Add MsgA configuration to the TS 38.533 annexes	16.9.0
2021-09	RAN#93	R5-215614	1438	-	F	Update on 6.3.1.1 to be aligned with TS 38.133	16.9.0
2021-09	RAN#93	R5-215620	1439	-	F	MTSU and TT mapping related to Max Device Size in TS 38.533	16.9.0
2021-09	RAN#93	R5-215622	1441	-	F	Updates on 5.6.1.3 and 5.6.1.4 CSI-RS RLM test cases test applicability	16.9.0
2021-09	RAN#93	R5-215624	1443	-	F	Correction in 5.6.1.1, 5.6.1.3 test procedure to configure iterations	16.9.0
2021-09	RAN#93	R5-215625	1444	-	F	Correction in 5.6.2.1, 5.6.2.2, 5.6.2.3, 5.6.2.4 test procedure to configure iterations	16.9.0
2021-09	RAN#93	R5-215655	1451	-	F	Update to applicability statement to include gap pattern id 13 for applicable NSA event triggered test cases	16.9.0
2021-09	RAN#93	R5-215656	1452	-	F	TRS configuration update to NSA FR1 TC 6.5.4.1.1	16.9.0
2021-09	RAN#93	R5-215903	1238	1	F	Change to EN-DC L1-RSRP test cases to add evaluation rules	16.9.0
2021-09	RAN#93	R5-215904	1240	1	F	Correction to 4.5.1.2 core spec alignment	16.9.0
2021-09	RAN#93	R5-215905	1241	1	F	Correction to 4.5.1.3 message contents and core spec alignment	16.9.0
2021-09	RAN#93	R5-215906	1244	1	F	Correction to 4.5.1.7 message contents and core spec alignment	16.9.0
2021-09	RAN#93	R5-215907	1329	1	F	Correction to FR1 and FR2 event-triggered reporting with gap tests	16.9.0
2021-09	RAN#93	R5-215908	1262	1	F	Change to SA L1-RSRP test cases to add evaluation rules	16.9.0
2021-09	RAN#93	R5-215909	1264	1	F	Correction to 6.5.1.3 message contents and core spec alignment	16.9.0
2021-09	RAN#93	R5-215910	1266	1	F	Correction to 6.5.1.7 message contents and core spec alignment	16.9.0
2021-09	RAN#93	R5-215911	1356	1	F	Correction to FR1 NR SA TCs-inter-RAT accuracy	16.9.0
2021-09	RAN#93	R5-215912	1402	1	F	Correction to test procedure for 6.1.2.2 IRAT ReSelection	16.9.0
2021-09	RAN#93	R5-215913	1277	1	F	Change title of iRAT test cases for clarity	16.9.0
2021-09	RAN#93	R5-215914	1361	1	F	Correction to LTE SA TC 8.5.1.1-SFTD accuracy	16.9.0
2021-09	RAN#93	R5-215915	1279	1	F	Change title of iRAT test cases for clarity - Annexes	16.9.0
2021-09	RAN#93	R5-215916	1333	1	F	Update to Annex H.3.4	16.9.0
2021-09	RAN#93	R5-215917	1366	1	F	Correction to default configuration-Annex H	16.9.0
2021-09	RAN#93	R5-215918	1421	1	F	Correction of CSI-ReportConfig in Annex H	16.9.0
2021-09	RAN#93	R5-215932	1377	1	F	Addition of cell mapping for Mob_Enh RRM TCs	16.9.0
2021-09	RAN#93	R5-215938	1316	1	F	Addition of NR SA FR2-FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	16.9.0
2021-09	RAN#93	R5-215939	1385	1	F	Addition of cell mapping for NR PS RRM TCs	16.9.0
2021-09	RAN#93	R5-215940	1392	1	F	Addition of minimum conformance requirements of inter-RAT cell re-selection with relaxed measurement criterion	16.9.0
2021-09	RAN#93	R5-215941	1395	1	F	Update of Annex E and Annex F for test cases with relaxed measurement criterion	16.9.0
2021-09	RAN#93	R5-215948	1386	1	F	Addition of NR HST RRM TC 4.6.1.7-intra-freq DRX highSpeedMeasFlag	16.9.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-09	RAN#93	R5-215949	1387	1	F	Addition of NR HST RRM TC 6.1.2.5-intra-freq cell reselection highSpeedMeasFlag	16.9.0
2021-09	RAN#93	R5-216042	1328	1	F	Correction to FR1 Beam Failure Detection and Link Recovery tests	16.9.0
2021-09	RAN#93	R5-216043	1339	1	F	Correction message contents 4.3.2.2.2	16.9.0
2021-09	RAN#93	R5-216044	1345	1	F	Update to applicability of test cases on CSI-RS based RLM	16.9.0
2021-09	RAN#93	R5-216045	1445	1	F	Updates to DCI based BWP switch NSA FR1 TC 4.5.6.1.1	16.9.0
2021-09	RAN#93	R5-216046	1446	1	F	Updates to DCI based BWP switch NSA FR1 2DLCA TC 4.5.6.1.2	16.9.0
2021-09	RAN#93	R5-216047	1447	1	F	Updates to RRC based BWP switch NSA FR1 TC 4.5.6.2.1	16.9.0
2021-09	RAN#93	R5-216048	1228	1	F	Completion 5.7.1.2 including TT analysis results	16.9.0
2021-09	RAN#93	R5-216049	1229	1	F	Completion 5.7.2.2 including TT analysis results	16.9.0
2021-09	RAN#93	R5-216050	1230	1	F	Completion 5.7.3.2 including TT analysis results	16.9.0
2021-09	RAN#93	R5-216051	1322	1	F	Correction to 6.5.3.1 NR SA FR1 SCell activation and deactivation of known SCell	16.9.0
2021-09	RAN#93	R5-216052	1231	1	F	Completion 7.7.1.2 including TT analysis results	16.9.0
2021-09	RAN#93	R5-216053	1233	1	F	Completion 7.7.3.2 including TT analysis results	16.9.0
2021-09	RAN#93	R5-216054	1346	1	F	Update to applicability of test cases requiring gap pattern ID 4	16.9.0
2021-09	RAN#93	R5-216055	1299	1	F	Completion Annex C.2.3	16.9.0
2021-09	RAN#93	R5-216098	1336	1	F	Correction to EN-DC FR2 interruptions at transitions between active and non-active during DRX	16.9.0
2021-09	RAN#93	R5-216099	1324	1	F	Correction to 6.5.2.1 NR SA FR1 interruptions during measurements on deactivated NR SCC	16.9.0
2021-09	RAN#93	R5-216100	1330	1	F	Correction to the propagation condition of NR cell for Inter RAT test cases	16.9.0
2021-09	RAN#93	R5-216101	1318	1	F	Addition of BWP definition for FR2 SSB SCS240kHz	16.9.0
2021-09	RAN#93	R5-216123	1448	1	F	Updates to DCI based BWP switch SA FR1 2DLCA TC 6.5.6.1.1	16.9.0
2021-09	RAN#93	R5-216124	1449	1	F	Updates to DCI based BWP switch SA FR1 TC 6.5.6.1.2	16.9.0
2021-09	RAN#93	R5-216125	1450	1	F	Updates to RRC based BWP switch SA FR1 TC 6.5.6.2.1	16.9.0
2021-09	RAN#93	R5-216132	1347	1	F	Correction to FR1 EN-DC TC 4.5.7.1-PSCell addition	16.9.0
2021-09	RAN#93	R5-216133	1348	1	F	Correction to FR1 EN-DC TCs-BWP switching	16.9.0
2021-09	RAN#93	R5-216134	1350	1	F	Correction to FR1 EN-DC TCs-SCell activation	16.9.0
2021-09	RAN#93	R5-216135	1354	1	F	Correction to FR1 NR SA TCs-BWP switching	16.9.0
2021-09	RAN#93	R5-216136	1358	1	F	Correction to FR1 NR SA TCs-SCell activation	16.9.0
2021-09	RAN#93	R5-216137	1454	1	F	Correction to UL BWP configuration for SA FR1 TC 6.5.2.1	16.9.0
2021-09	RAN#93	R5-216138	1364	1	F	Correction to LTE SA TCs-SFTD delay	16.9.0
2021-09	RAN#93	R5-216143	1393	1	F	Addition of 6.1.2.3 inter-RAT cell re-selection with relaxed measurement with low mobility	16.9.0
2021-09	RAN#93	R5-216144	1394	1	F	Addition of 6.1.2.4 inter-RAT cell re-selection with relaxed measurement with not at cell edge	16.9.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-09	RAN#93	R5-216145	1422	1	F	Correction of RRM EN-DC FR2 SSB-based L1-RSRP measurement in non-DRX test case 5.6.3.1 including Test Tolerance	16.9.0
2021-09	RAN#93	R5-216146	1423	1	F	Correction of RRM EN-DC FR2 SSB-based L1-RSRP measurement in DRX test case 5.6.3.2 including Test Tolerance	16.9.0
2021-09	RAN#93	R5-216147	1424	1	F	Correction of RRM EN-DC FR2 CSI-RS-based L1-RSRP measurement in non-DRX test case 5.6.3.3	16.9.0
2021-09	RAN#93	R5-216148	1426	1	F	Correction of RRM NR SA FR2 SSB-based L1-RSRP measurement in non-DRX test case 7.6.3.1 including Test Tolerance	16.9.0
2021-09	RAN#93	R5-216149	1427	1	F	Correction of RRM NR SA FR2 SSB-based L1-RSRP measurement in DRX test case 7.6.3.2 including Test Tolerance	16.9.0
2021-09	RAN#93	R5-216360	1428	1	F	Correction of RRM NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX test case 7.6.3.3	16.9.0
2021-09	RAN#93	R5-216361	1429	1	F	Correction of RRM NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX test case 7.6.3.4	16.9.0
2021-09	RAN#93	R5-216364	1314	1	F	Addition of NR SA FR2 cell re-selection for UE fulfilling low mobility relaxed measurement criterion	16.9.0
2021-09	RAN#93	R5-216365	1315	1	F	Addition of NR SA FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	16.9.0
2021-09	RAN#93	R5-216366	1317	1	F	Addition of NR SA FR2-FR2 cell re-selection for UE fulfilling not-at-cell edge relaxed measurement criterion	16.9.0
2021-09	RAN#93	R5-215968	1397	1	B	Introduction of n24	17.0.0
2021-12	RAN#94	R5-216602	1455	-	F	Update of TC 6.7.1.1.2	17.1.0
2021-12	RAN#94	R5-216839	1458	-	F	Correction to CSI-RS based beam failure detection test cases	17.1.0
2021-12	RAN#94	R5-216840	1459	-	F	Correction to Initial DL and UL BWP for test case 6.3.2.1.2	17.1.0
2021-12	RAN#94	R5-216841	1460	-	F	Correction to SRS configuration for FR1 timing test cases	17.1.0
2021-12	RAN#94	R5-216842	1461	-	F	Correction to SRS configuration for FR2 timing test cases	17.1.0
2021-12	RAN#94	R5-216843	1462	-	F	Correction to FR1 CA RRM tests for generic channel BW configurations	17.1.0
2021-12	RAN#94	R5-216844	1463	-	F	Correction to FR1 Active BWP Switch Delay TCs	17.1.0
2021-12	RAN#94	R5-216845	1464	-	F	Correction to FR1 Redirection test cases	17.1.0
2021-12	RAN#94	R5-216846	1465	-	F	Correction to message exceptions for CSI-RS based BFR tests	17.1.0
2021-12	RAN#94	R5-216857	1470	-	F	Correction to FR2 EN-DC RRM TCs - RLM	17.1.0
2021-12	RAN#94	R5-216860	1473	-	F	Correction to FR2 EN-DC RRM TCs using Table H.3.1-4 for event A4	17.1.0
2021-12	RAN#94	R5-216861	1474	-	F	Correction to FR1 NR SA RRM TC 6.1.1.1 - intra-freq reselection	17.1.0
2021-12	RAN#94	R5-216862	1475	-	F	Correction to FR1 NR SA RRM TC 6.7.6.1 - inter-RAT meas	17.1.0
2021-12	RAN#94	R5-216864	1477	-	F	Correction to FR1 NR SA RRM TCs 6.5.2.1 - interruption	17.1.0
2021-12	RAN#94	R5-216866	1479	-	F	Correction to FR2 NR SA RRM TCs using Table H.3.1-4 for event A4	17.1.0
2021-12	RAN#94	R5-216868	1481	-	F	Correction to SSB reference configurations	17.1.0
2021-12	RAN#94	R5-216869	1482	-	F	Correction to Annex H for RRM TCs	17.1.0
2021-12	RAN#94	R5-216873	1485	-	F	Correction to Mob_enh RRM TC 6.3.3.1 - FR1 intra CHO	17.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-12	RAN#94	R5-216874	1486	-	F	Correction to Mob_enh RRM TC 6.3.3.2 - FR1 inter CHO	17.1.0
2021-12	RAN#94	R5-216876	1488	-	F	Correction to Mob_enh RRM TC 7.3.1.5 - inter-FR DAPS async	17.1.0
2021-12	RAN#94	R5-216886	1492	-	F	Correction to PS RRM TC 6.1.1.3 - intra low mobility	17.1.0
2021-12	RAN#94	R5-216887	1493	-	F	Correction to PS RRM TC 6.1.1.4 - intra not cell edge	17.1.0
2021-12	RAN#94	R5-216888	1494	-	F	Correction to PS RRM TC 6.1.1.5 - inter low mobility	17.1.0
2021-12	RAN#94	R5-216889	1495	-	F	Correction to PS RRM TC 6.1.1.6 - inter not cell edge	17.1.0
2021-12	RAN#94	R5-216890	1496	-	F	Correction to Annex F for PS RRM TCs	17.1.0
2021-12	RAN#94	R5-216900	1497	-	F	Correction to SRVCC RRM TC 6.3.1.6 - UTRA handover	17.1.0
2021-12	RAN#94	R5-216902	1499	-	F	Correction to Annex F for SRVCC RRM TCs	17.1.0
2021-12	RAN#94	R5-216912	1500	-	F	Correction to HST RRM TC 4.6.1.7 - intra-freq meas	17.1.0
2021-12	RAN#94	R5-216913	1501	-	F	Correction to HST RRM TC 4.6.4.5 - L1-RSRP	17.1.0
2021-12	RAN#94	R5-216914	1502	-	F	Correction to HST RRM TC 6.1.2.5 - inter-RAT reselection	17.1.0
2021-12	RAN#94	R5-216915	1503	-	F	Correction to Annex F for HST RRM TCs	17.1.0
2021-12	RAN#94	R5-217070	1505	-	F	Correction of message configuration for EN-DC FR1 SFTD TC 4.7.5.1	17.1.0
2021-12	RAN#94	R5-217122	1510	-	F	Reinstate wrongly deleted Table H.3.5-4	17.1.0
2021-12	RAN#94	R5-217123	1511	-	F	Correct B2 Threshold in H.3.1-4A	17.1.0
2021-12	RAN#94	R5-217124	1512	-	F	Corrections to 4.3.2.2.1	17.1.0
2021-12	RAN#94	R5-217131	1515	-	F	Corrections to L1-RSRP EN-DC test cases	17.1.0
2021-12	RAN#94	R5-217132	1516	-	F	Corrections to L1-RSRP NR SA test cases	17.1.0
2021-12	RAN#94	R5-217145	1517	-	F	Correct reference to test frequencies	17.1.0
2021-12	RAN#94	R5-217203	1519	-	F	Addition of minimum requirements for EN-DC L1-SINR measurement for beam reporting	17.1.0
2021-12	RAN#94	R5-217207	1523	-	F	Addition of minimum requirements for NR SA FR1 L1-SINR measurement for beam reporting	17.1.0
2021-12	RAN#94	R5-217211	1527	-	F	Addition of the abbreviations for Rel-16 NR MIMO	17.1.0
2021-12	RAN#94	R5-217213	1529	-	F	Addition of Annex A.1.4B CSI-IM Reference Measurement Channels	17.1.0
2021-12	RAN#94	R5-217214	1530	-	F	Addition of Annex H.3.6A RRC messages and IE exceptions for L1-SINR measurement for beam reporting	17.1.0
2021-12	RAN#94	R5-217228	1539	-	F	Correct of RRM Test Cases for test applicability	17.1.0
2021-12	RAN#94	R5-217229	1540	-	F	Correct of RRM Test Cases	17.1.0
2021-12	RAN#94	R5-217255	1541	-	F	Addition of FR-1 NSA CLI accuracy test cases	17.1.0
2021-12	RAN#94	R5-217258	1542	-	F	Corrections to event-triggered iRAT	17.1.0
2021-12	RAN#94	R5-217395	1545	-	F	Update of 6.1.2.3 and 6.1.2.4 for MU and TT	17.1.0
2021-12	RAN#94	R5-217396	1546	-	F	Update of Annex F for test cases with relaxed measurement criterion	17.1.0
2021-12	RAN#94	R5-217436	1550	-	F	Correction to E-UTRA - NR FR1 cell re-selection to higher priority NR target cell	17.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-12	RAN#94	R5-217438	1551	-	F	Correction to SIB4 exceptions in Annex H	17.1.0
2021-12	RAN#94	R5-217439	1552	-	F	Correction to FR2 event-triggered reporting with gap test	17.1.0
2021-12	RAN#94	R5-217441	1553	-	F	Correction to test procedure in 8.2.1.1	17.1.0
2021-12	RAN#94	R5-217443	1555	-	F	Correction to test requirement in 8.3.1.1	17.1.0
2021-12	RAN#94	R5-217520	1559	-	F	Addition of RMC CORESET to FR2 random access tests	17.1.0
2021-12	RAN#94	R5-217570	1561	-	F	Correction of RRM HST Inter-RAT measurements test case 6.6.3.3 including Test Tolerance	17.1.0
2021-12	RAN#94	R5-217572	1563	-	F	Correction of RRM HST E-UTRA NR Inter-RAT event triggered reporting test case 8.4.2.9 including Test Tolerance	17.1.0
2021-12	RAN#94	R5-217573	1564	-	F	Correction of RRM EN-DC FR2 CSI-RS-based L1-RSRP measurement in non-DRX test case 5.6.3.3 including Test Tolerance	17.1.0
2021-12	RAN#94	R5-217574	1565	-	F	Correction of RRM EN-DC FR2 CSI-RS-based L1-RSRP measurement in DRX test case 5.6.3.4 including Test Tolerance	17.1.0
2021-12	RAN#94	R5-217575	1566	-	F	Correction of RRM NR SA FR2 CSI-RS-based L1-RSRP measurement in non-DRX test case 7.6.3.3 including Test Tolerance	17.1.0
2021-12	RAN#94	R5-217576	1567	-	F	Correction of RRM NR SA FR2 CSI-RS-based L1-RSRP measurement in DRX test case 7.6.3.4 including Test Tolerance	17.1.0
2021-12	RAN#94	R5-217577	1568	-	F	Correction of SA FR2 RRC re-establishment test case 7.3.2.1.1	17.1.0
2021-12	RAN#94	R5-217580	1571	-	F	Correction of Measurement Uncertainty and Test Tolerance in Annex F for RRM test cases	17.1.0
2021-12	RAN#94	R5-217585	1572	-	F	Correction of Minimum conformance requirements for FR1 re-establishment test cases	17.1.0
2021-12	RAN#94	R5-217586	1573	-	F	Correction of Minimum conformance requirements for FR2 re-establishment test cases	17.1.0
2021-12	RAN#94	R5-217661	1574	-	F	Update on FR2 Radio Link monitoring SSB based RLM test cases	17.1.0
2021-12	RAN#94	R5-217663	1575	-	F	Update on FR2 radio link monitoring CSI-RS based RLM test cases	17.1.0
2021-12	RAN#94	R5-217736	1576	-	F	Update to SA Handover delay requirements	17.1.0
2021-12	RAN#94	R5-218207	1577	-	F	Correct 5.7.3.2 / 7.7.3.2 test case limits based on TT analysis results	17.1.0
2021-12	RAN#94	R5-218215	1457	1	F	Correction to Mob_enh RRM TC 6.3.1.9 - inter-freq sync DAPS HO	17.1.0
2021-12	RAN#94	R5-218216	1491	1	F	Correction to Annex F for Mob_enh RRM TCs	17.1.0
2021-12	RAN#94	R5-218217	1504	1	F	Correction to Mob_enh RRM TC 6.3.1.10 - inter-freq async DAPS HO	17.1.0
2021-12	RAN#94	R5-218250	1469	1	F	Correction to FR1 EN-DC RRM TCs 4.5.2.X - interruption	17.1.0
2021-12	RAN#94	R5-218251	1513	1	F	Corrections to RLM EN-DC test cases	17.1.0
2021-12	RAN#94	R5-218252	1548	1	F	Correction to EN-DC FR1 addition and release delay of known PSCell	17.1.0
2021-12	RAN#94	R5-218253	1471	1	F	Correction to FR2 EN-DC RRM TCs - RRC based	17.1.0
2021-12	RAN#94	R5-218254	1506	1	F	Correction of T2 timer value for SA FR1 TC 6.3.2.1.3	17.1.0
2021-12	RAN#94	R5-218255	1514	1	F	Corrections to RLM NR SA test cases	17.1.0
2021-12	RAN#94	R5-218256	1478	1	F	Correction to FR2 NR SA RRM TCs - RLM	17.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-12	RAN#94	R5-218257	1507	1	F	Correction of RRC re-establishment delay for SA FR2 TC 7.3.2.1.1	17.1.0
2021-12	RAN#94	R5-218258	1508	1	F	Correction of T2 timer value for SA FR2 TC 7.3.2.1.2	17.1.0
2021-12	RAN#94	R5-218259	1509	1	F	Correction of T2 timer value for SA FR2 TC 7.3.2.1.3	17.1.0
2021-12	RAN#94	R5-218260	1569	1	F	Correction of SA FR2 - FR2 RRC re-establishment test case 7.3.2.1.2	17.1.0
2021-12	RAN#94	R5-218261	1480	1	F	Correction to LTE SA RRM TCs - NR inter-RAT accuracy	17.1.0
2021-12	RAN#94	R5-218294	1544	1	F	Update of Annex for 4.5.8.1 EN-DC FR1 DL interruptions at switching between two uplink carriers	17.1.0
2021-12	RAN#94	R5-218296	1483	1	F	Correction to Mob_enh RRM TC 6.3.1.7 - intra DAPS sync	17.1.0
2021-12	RAN#94	R5-218297	1484	1	F	Correction to Mob_enh RRM TC 6.3.1.8 - intra DAPS async	17.1.0
2021-12	RAN#94	R5-218298	1487	1	F	Correction to Mob_enh RRM TC 7.3.1.4 - inter-FR DAPS sync	17.1.0
2021-12	RAN#94	R5-218299	1490	1	F	Correction to Mob_enh RRM TC 7.3.3.2 - FR2 inter CHO	17.1.0
2021-12	RAN#94	R5-218313	1520	1	F	Addition of 4.6.7.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in non-DRX	17.1.0
2021-12	RAN#94	R5-218314	1521	1	F	Addition of 4.6.7.2 EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR measurement in DRX	17.1.0
2021-12	RAN#94	R5-218315	1522	1	F	Addition of 4.6.7.3 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX	17.1.0
2021-12	RAN#94	R5-218316	1524	1	F	Addition of 6.6.8.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX	17.1.0
2021-12	RAN#94	R5-218317	1525	1	F	Addition of 6.6.8.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX	17.1.0
2021-12	RAN#94	R5-218318	1526	1	F	Addition of 6.6.8.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX	17.1.0
2021-12	RAN#94	R5-218319	1528	1	F	Addition of CSI-RS Reference Measurement Channels based on IMR	17.1.0
2021-12	RAN#94	R5-218320	1531	1	F	Addition of 4.5.5.5 EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in non-DRX	17.1.0
2021-12	RAN#94	R5-218321	1532	1	F	Addition of 4.5.5.6 EN-DC FR1 Scell CSI-RS-based beam failure detection and SSB-based link recovery in DRX	17.1.0
2021-12	RAN#94	R5-218322	1533	1	F	Addition of 4.7.7.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	17.1.0
2021-12	RAN#94	R5-218323	1535	1	F	Addition of 4.7.7.3 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	17.1.0
2021-12	RAN#94	R5-218324	1536	1	F	Addition of 6.7.9.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	17.1.0
2021-12	RAN#94	R5-218325	1537	1	F	Addition of 6.7.9.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy	17.1.0
2021-12	RAN#94	R5-218326	1538	1	F	Addition of 6.7.9.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	17.1.0
2021-12	RAN#94	R5-218327	1547	1	F	Addition of cell configuration MU and TT for Enhancement on MIMO	17.1.0
2021-12	RAN#94	R5-218336	1498	1	F	Correction to SRVCC RRM TC 6.6.5.1 - UTRA meas	17.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-12	RAN#94	R5-218351	1562	1	F	Correction of RRM HST E-UTRA NR FR1 Cell reselection test case 8.2.1.2 including Test Tolerance	17.1.0
2021-12	RAN#94	R5-218352	1570	1	F	Correction of Measurement Uncertainty and Test Tolerance in Annex F for RRM HST test cases	17.1.0
2021-12	RAN#94	R5-218372	1543	1	F	Addition of 4.5.8.1 EN-DC FR1 DL interruptions at switching between two uplink carriers	17.1.0
2021-12	RAN#94	R5-218439	1468	1	F	Correction to FR1 EN-DC RRM TCs - RRC based	17.1.0
2021-12	RAN#94	R5-218440	1560	1	F	Test Procedure update for FR1 Event Triggered test cases with CDRX	17.1.0
2021-12	RAN#94	R5-218441	1472	1	F	Correction to FR2 EN-DC RRM TCs 5.5.2.X - interruption	17.1.0
2021-12	RAN#94	R5-218442	1558	1	F	Update to FR2 interruption tests 5.5.2.1 and 5.5.2.2	17.1.0
2021-12	RAN#94	R5-218443	1456	1	F	Addition of clause 3A.6 for UE with Multiband Capability	17.1.0
2021-12	RAN#94	R5-218444	1556	1	F	Clarification on cl 3A.1.1 test coverage across 5G NR architecture options for RRM	17.1.0
2021-12	RAN#94	R5-218461	1489	1	F	Correction to Mob_enh RRM TC 7.3.3.1 - FR2 intra CHO	17.1.0
2021-12	RAN#94	R5-218464	1534	1	F	Addition of 4.7.7.2 EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR absolute measurement accuracy	17.1.0
2022-03	RAN#95	R5-220096	1578	-	F	Correction to Mob_enh RRM TC 6.3.1.11 - inter-band sync DAPS HO including test tolerance	17.2.0
2022-03	RAN#95	R5-220097	1579	-	F	Correction to Mob_enh RRM TC 6.3.1.12 - inter-band async DAPS HO including test tolerance	17.2.0
2022-03	RAN#95	R5-220109	1580	-	F	Update of SA FR1 TC 4.5.3.1 and 4.5.3.3	17.2.0
2022-03	RAN#95	R5-220110	1581	-	F	Update of SA FR1 TC 6.5.3.1 and 6.5.3.3	17.2.0
2022-03	RAN#95	R5-220136	1582	-	F	Correction to Annex F for Mob_enh RRM TCs	17.2.0
2022-03	RAN#95	R5-220160	1583	-	F	Add test case 7.3.2.2.4 for SA FR2 2-step PRACH	17.2.0
2022-03	RAN#95	R5-220167	1584	-	F	Updates to RRM HST Test Case 6.6.1.7	17.2.0
2022-03	RAN#95	R5-220168	1585	-	F	Updates to RRM HST Test Case 6.6.4.5	17.2.0
2022-03	RAN#95	R5-220196	1586	-	F	Update to table E.5-1 to add the cell configurations for one 2-step RACH test case	17.2.0
2022-03	RAN#95	R5-220278	1587	-	F	Clarifications on 5G NR connectivity options for RRM	17.2.0
2022-03	RAN#95	R5-220282	1588	-	F	Test case update for FR1 CLI-RSSI measurement with non-DRX	17.2.0
2022-03	RAN#95	R5-220283	1589	-	F	Annexure update for test tolerance for FR1 CLI-RSSI measurement with non-DRX	17.2.0
2022-03	RAN#95	R5-220689	1592	-	F	Correction to FR1 EN-DC RRM TCs - SCell activation	17.2.0
2022-03	RAN#95	R5-220697	1600	-	F	Correction to FR2 EN-DC RRM TC 5.6.1.2	17.2.0
2022-03	RAN#95	R5-220699	1602	-	F	Correction to FR2 EN-DC RRM TC 5.6.1.4	17.2.0
2022-03	RAN#95	R5-220701	1604	-	F	Correction to FR1 NR SA RRM TC 6.5.2.1 - interruption SCC	17.2.0
2022-03	RAN#95	R5-220702	1605	-	F	Correction to FR1 NR SA RRM TCs - SCell activation	17.2.0
2022-03	RAN#95	R5-220726	1623	-	F	Addition of band group for NR SL RRM test	17.2.0
2022-03	RAN#95	R5-220727	1624	-	F	Addition of minimum requirements for NR SL UE Tx timing TCs	17.2.0
2022-03	RAN#95	R5-220728	1625	-	F	Addition of NR SL RRM TC 9.1.1.1 - Tx Timing GNSS	17.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-03	RAN#95	R5-220729	1626	-	F	Addition of NR SL RRM TC 9.1.1.2 - Tx Timing SyncRef UE	17.2.0
2022-03	RAN#95	R5-220730	1627	-	F	Addition of NR SL RRM TC 9.1.1.3 - Tx Timing NR Cell	17.2.0
2022-03	RAN#95	R5-220731	1628	-	F	Addition of minimum requirements for NR SL S-SSB Tx TCs	17.2.0
2022-03	RAN#95	R5-220734	1631	-	F	Addition of minimum requirements for NR SL SyncRef reselection TCs	17.2.0
2022-03	RAN#95	R5-220737	1634	-	F	Addition of minimum requirements for NR SL L1 SL-RSRP TCs	17.2.0
2022-03	RAN#95	R5-220738	1635	-	F	Addition of NR SL RRM TC 9.1.4.1 - Resource sensing	17.2.0
2022-03	RAN#95	R5-220741	1638	-	F	Addition of minimum requirements for NR SL Congestion control TCs	17.2.0
2022-03	RAN#95	R5-220742	1639	-	F	Addition of NR SL RRM TC 9.1.5.1 - SL-RSSI con-current	17.2.0
2022-03	RAN#95	R5-220744	1641	-	F	Addition of minimum requirements for NR SL interruption TCs	17.2.0
2022-03	RAN#95	R5-220745	1642	-	F	Addition of NR SL RRM TC 9.1.6.1 - WAN interruption	17.2.0
2022-03	RAN#95	R5-220747	1644	-	F	Addition of side conditions for NR SL RRM test in Annex B	17.2.0
2022-03	RAN#95	R5-220748	1645	-	F	Correction to Annex E for NR SL RRM TCs	17.2.0
2022-03	RAN#95	R5-220749	1646	-	F	Correction to Annex G for NR SL RRM TCs	17.2.0
2022-03	RAN#95	R5-220798	1647	-	F	Update to 5.5.5.0 FR2 BFD minimum requirements	17.2.0
2022-03	RAN#95	R5-220801	1650	-	F	Update to 7.5.5.0 FR2 BFD minimum requirements	17.2.0
2022-03	RAN#95	R5-220804	1653	-	F	Update to Annex E for eMIMO test cases	17.2.0
2022-03	RAN#95	R5-220910	1657	-	F	Correction to TRS Configuration of 6.3.2.1.3	17.2.0
2022-03	RAN#95	R5-220911	1658	-	F	Correction to test procedure of 6.1.1.2	17.2.0
2022-03	RAN#95	R5-220912	1659	-	F	Correction to reference of test frequency in 6.3.1.x NR only test cases	17.2.0
2022-03	RAN#95	R5-220918	1661	-	F	Correction to SRS configuration condition for FR1 timing test cases	17.2.0
2022-03	RAN#95	R5-220920	1662	-	F	Correction to DRX setting of 8.4.2.9	17.2.0
2022-03	RAN#95	R5-220921	1663	-	F	Correction to message exception for handover test cases	17.2.0
2022-03	RAN#95	R5-220923	1665	-	F	Correction to BWP switch delay test cases	17.2.0
2022-03	RAN#95	R5-220924	1666	-	F	Correction to message exception for 4.7.5.1	17.2.0
2022-03	RAN#95	R5-220927	1668	-	F	Correction to 6.3.2.3.1 NR SA FR1 RRC connection release with redirection	17.2.0
2022-03	RAN#95	R5-220928	1669	-	F	Correction to NR-EUTRA and EUTRA-NR reselection with high speed	17.2.0
2022-03	RAN#95	R5-220929	1670	-	F	Correction to message exception for 8.5.1.1	17.2.0
2022-03	RAN#95	R5-220930	1671	-	F	Correction to ssb-ResourceList for 5.3.2.2.2	17.2.0
2022-03	RAN#95	R5-220931	1672	-	F	Correction to SMTC configuration in 6.1.1.7	17.2.0
2022-03	RAN#95	R5-220933	1674	-	F	Correction to T HARQ setting for 6.5.3.1	17.2.0
2022-03	RAN#95	R5-220938	1678	-	F	Correction to DRX setting of 6.6.1.7	17.2.0
2022-03	RAN#95	R5-220939	1679	-	F	Correction to message exception of 4.6.1.7	17.2.0
2022-03	RAN#95	R5-220940	1680	-	F	Correction to test procedure for 8.2.1.2	17.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-03	RAN#95	R5-220941	1681	-	F	Correction to SIB1 message exceptions of 4.6.1.7 and 4.6.4.5	17.2.0
2022-03	RAN#95	R5-220942	1682	-	F	Addition of new test case 7.7.6.1 NR SA FR2 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR measurement accuracy	17.2.0
2022-03	RAN#95	R5-220943	1683	-	F	Addition of new test case 7.7.6.2 NR SA FR2 SSB based CMR and dedicated IMR L1-SINR measurement accuracy	17.2.0
2022-03	RAN#95	R5-220944	1684	-	F	Addition of new test case 7.7.6.3 NR SA FR2 CSI-RS based CMR and dedicated IMR L1-SINR measurement accuracy	17.2.0
2022-03	RAN#95	R5-220986	1688	-	F	Update of 4.6.7.1 EN-DC FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in non-DRX	17.2.0
2022-03	RAN#95	R5-220988	1690	-	F	Update of 4.6.7.3 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in DRX	17.2.0
2022-03	RAN#95	R5-220989	1691	-	F	Update of 6.6.8.1 NR SA FR1 CSI-RS based CMR and no dedicated IMR L1-SINR measurement in DRX	17.2.0
2022-03	RAN#95	R5-220991	1693	-	F	Update of 6.6.8.3 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR measurement in non-DRX	17.2.0
2022-03	RAN#95	R5-220992	1694	-	F	Update of Annex for EN-DC FR1 L1-SINR measurement test cases	17.2.0
2022-03	RAN#95	R5-220993	1695	-	F	Update of Annex for NR SA FR1 L1-SINR measurement test cases	17.2.0
2022-03	RAN#95	R5-221001	1696	-	F	Correction to Annex H.3.6A RRC messages for L1-SINR measurement	17.2.0
2022-03	RAN#95	R5-221008	1698	-	F	Editorial corrections for EditHelp comments s1 to s3	17.2.0
2022-03	RAN#95	R5-221009	1699	-	F	Editorial corrections for EditHelp comments s4	17.2.0
2022-03	RAN#95	R5-221010	1700	-	F	Editorial corrections to revert headers to h6 for s4	17.2.0
2022-03	RAN#95	R5-221011	1701	-	F	Editorial corrections for EditHelp comments s5	17.2.0
2022-03	RAN#95	R5-221012	1702	-	F	Editorial corrections to revert headers to h6 for s5	17.2.0
2022-03	RAN#95	R5-221013	1703	-	F	Editorial corrections for EditHelp comments s6.1 to s6.3	17.2.0
2022-03	RAN#95	R5-221014	1704	-	F	Editorial corrections for EditHelp comments s6.4 to s6.5	17.2.0
2022-03	RAN#95	R5-221015	1705	-	F	Editorial corrections for EditHelp comments s7	17.2.0
2022-03	RAN#95	R5-221016	1706	-	F	Editorial corrections for EditHelp comments s8	17.2.0
2022-03	RAN#95	R5-221017	1707	-	F	Editorial corrections to revert headers to h6 for s8	17.2.0
2022-03	RAN#95	R5-221018	1708	-	F	Editorial corrections for EditHelp comments Annexes	17.2.0
2022-03	RAN#95	R5-221019	1709	-	F	New section for NE-DC RRM test cases	17.2.0
2022-03	RAN#95	R5-221020	1710	-	F	Minimum requirements for EN-DC FR1 L1-RSRP test cases	17.2.0
2022-03	RAN#95	R5-221021	1711	-	F	Minimum requirements for EN-DC FR2 L1-RSRP test cases	17.2.0
2022-03	RAN#95	R5-221024	1714	-	F	Correct message contents reference iRAT	17.2.0
2022-03	RAN#95	R5-221025	1715	-	F	Add auxiliary band for n39	17.2.0
2022-03	RAN#95	R5-221026	1716	-	F	Corrections to 5.7.x.x	17.2.0
2022-03	RAN#95	R5-221027	1717	-	F	Corrections to 8.4.2.4	17.2.0
2022-03	RAN#95	R5-221028	1718	-	F	Corrections to 8.2.1.1	17.2.0
2022-03	RAN#95	R5-221029	1719	-	F	Corrections to 8.5.2.2.1	17.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-03	RAN#95	R5-221031	1721	-	F	Correction reportAmount for B2 report	17.2.0
2022-03	RAN#95	R5-221033	1723	-	F	Corrections to message contents for 8.4.2.3 and 8.4.2.4	17.2.0
2022-03	RAN#95	R5-221187	1728	-	F	Correct message content for RLM-SSB Based FR2 5.5.1.1	17.2.0
2022-03	RAN#95	R5-221188	1729	-	F	Correct message content for RLM-SSB Based FR2 5.5.1.2	17.2.0
2022-03	RAN#95	R5-221189	1730	-	F	Correct message content for RLM-SSB Based FR2 5.5.1.3	17.2.0
2022-03	RAN#95	R5-221190	1731	-	F	Correct message content for RLM-SSB Based FR2 5.5.1.4	17.2.0
2022-03	RAN#95	R5-221191	1732	-	F	Correct message content for FR2 interruption	17.2.0
2022-03	RAN#95	R5-221254	1733	-	F	Update 4.5.7.1 test procedure	17.2.0
2022-03	RAN#95	R5-221256	1734	-	F	Update number of HARQ processes for FDD	17.2.0
2022-03	RAN#95	R5-221289	1736	-	F	Correction of RRM re-establishment test case 7.3.2.1.1 including Test Tolerance	17.2.0
2022-03	RAN#95	R5-221290	1737	-	F	Correction of RRM re-establishment test case 7.3.2.1.2 including Test Tolerance	17.2.0
2022-03	RAN#95	R5-221291	1738	-	F	Test Tolerance addition in Annex F for RRM FR2 re-establishment test cases	17.2.0
2022-03	RAN#95	R5-221297	1739	-	F	Addition of Minimum conformance requirements for DL interruptions at switching between two uplink carriers	17.2.0
2022-03	RAN#95	R5-221298	1740	-	F	Addition of UL switching test case 6.5.7.1	17.2.0
2022-03	RAN#95	R5-221300	1742	-	F	Cell configuration mapping for UL switching test cases	17.2.0
2022-03	RAN#95	R5-221301	1743	-	F	Addition of Idle mode CA/DC measurement test case 6.6.9.1	17.2.0
2022-03	RAN#95	R5-221302	1744	-	F	Addition of Idle Mode measurements of inter-RAT CA candidate cells for early reporting test case 6.6.15.1	17.2.0
2022-03	RAN#95	R5-221370	1748	-	F	Update to PDSCH reference measurement channels for RRM test cases with DRX config	17.2.0
2022-03	RAN#95	R5-221637	1613	1	F	Correction to FR2 NR SA RRM TC 7.6.1.2 with TT	17.2.0
2022-03	RAN#95	R5-221638	1615	1	F	Correction to FR2 NR SA RRM TC 7.6.1.4 with TT	17.2.0
2022-03	RAN#95	R5-221645	1619	1	F	Correction to Mob_enh RRM TC 7.3.1.4 with TT	17.2.0
2022-03	RAN#95	R5-221646	1620	1	F	Correction to Mob_enh RRM TC 7.3.1.5 with TT	17.2.0
2022-03	RAN#95	R5-221650	1685	1	F	Completion 4.5.5.5 including TT analysis results	17.2.0
2022-03	RAN#95	R5-221651	1686	1	F	Completion 4.5.5.6 including TT analysis results	17.2.0
2022-03	RAN#95	R5-221652	1687	1	F	Addition of cell configuration MU and TT for Enhancement on MIMO	17.2.0
2022-03	RAN#95	R5-221653	1689	1	F	Update of 4.6.7.2 EN-DC FR1 SSB based CMR and dedicated IMR L1-SINR measurement in DRX	17.2.0
2022-03	RAN#95	R5-221654	1692	1	F	Update of 6.6.8.2 NR SA FR1 SSB based CMR and dedicated IMR L1-SINR measurement in non-DRX	17.2.0
2022-03	RAN#95	R5-221655	1656	1	F	Correction to NR SA FR1 cell re-selection for UE configured with highSpeedMeasFlag-r16	17.2.0
2022-03	RAN#95	R5-221713	1591	1	F	Correction to FR1 EN-DC RRM TCs - interruption SCC	17.2.0
2022-03	RAN#95	R5-221714	1746	1	F	Introduce Test case for LTE PSCell addition and release in NE-DC	17.2.0
2022-03	RAN#95	R5-221715	1593	1	F	Correction to FR2 EN-DC RRM TCs - RLM	17.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-03	RAN#95	R5-221716	1594	1	F	Correction to FR2 EN-DC RRM TC 5.5.5.1 with TT	17.2.0
2022-03	RAN#95	R5-221717	1595	1	F	Correction to FR2 EN-DC RRM TC 5.5.5.2 with TT	17.2.0
2022-03	RAN#95	R5-221718	1596	1	F	Correction to FR2 EN-DC RRM TC 5.5.5.3 with TT	17.2.0
2022-03	RAN#95	R5-221719	1597	1	F	Correction to FR2 EN-DC RRM TC 5.5.5.4 with TT	17.2.0
2022-03	RAN#95	R5-221720	1598	1	F	Correction to FR2 EN-DC RRM TC 5.5.5.5 with TT	17.2.0
2022-03	RAN#95	R5-221721	1599	1	F	Correction to FR2 EN-DC RRM TC 5.6.1.1 with TT	17.2.0
2022-03	RAN#95	R5-221722	1601	1	F	Correction to FR2 EN-DC RRM TC 5.6.1.3 with TT	17.2.0
2022-03	RAN#95	R5-221723	1712	1	F	New test case 5.7.4.1	17.2.0
2022-03	RAN#95	R5-221724	1713	1	F	New test case 5.7.4.2	17.2.0
2022-03	RAN#95	R5-221725	1725	1	F	Update to RRM test case with CDRX	17.2.0
2022-03	RAN#95	R5-221726	1720	1	F	Corrections to 6.7.x.x	17.2.0
2022-03	RAN#95	R5-221727	1607	1	F	Correction to FR2 NR SA RRM TC 7.5.5.1 with TT	17.2.0
2022-03	RAN#95	R5-221728	1608	1	F	Correction to FR2 NR SA RRM TC 7.5.5.2 with TT	17.2.0
2022-03	RAN#95	R5-221729	1609	1	F	Correction to FR2 NR SA RRM TC 7.5.5.3 with TT	17.2.0
2022-03	RAN#95	R5-221730	1610	1	F	Correction to FR2 NR SA RRM TC 7.5.5.4 with TT	17.2.0
2022-03	RAN#95	R5-221731	1611	1	F	Correction to FR2 NR SA RRM TC 7.5.5.5 with TT	17.2.0
2022-03	RAN#95	R5-221732	1612	1	F	Correction to FR2 NR SA RRM TC 7.6.1.1 with TT	17.2.0
2022-03	RAN#95	R5-221733	1614	1	F	Correction to FR2 NR SA RRM TC 7.6.1.3 with TT	17.2.0
2022-03	RAN#95	R5-221734	1667	1	F	Correction to message exception for 8.4.2.x with SSB index detection	17.2.0
2022-03	RAN#95	R5-221735	1726	1	F	Test procedure update to L2NR Cell reselection test case	17.2.0
2022-03	RAN#95	R5-221736	1616	1	F	Correction to Annex F for FR2 SSB based BFD TCs	17.2.0
2022-03	RAN#95	R5-221737	1617	1	F	Correction to Annex F for FR2 SSB based intra-freq measurement TCs	17.2.0
2022-03	RAN#95	R5-221738	1618	1	F	Correction to default configuration in Annex H	17.2.0
2022-03	RAN#95	R5-221739	1722	1	F	Updates to CSI-ReportConfig for FR2	17.2.0
2022-03	RAN#95	R5-221740	1724	1	F	Update report config for iRAT test cases	17.2.0
2022-03	RAN#95	R5-221741	1745	1	F	Correction of clause 3	17.2.0
2022-03	RAN#95	R5-221742	1749	1	F	Correction to test frequencies for intra-band contiguous CA	17.2.0
2022-03	RAN#95	R5-221798	1741	1	F	Addition of UL switching test case 6.5.7.2	17.2.0
2022-03	RAN#95	R5-221812	1621	1	F	Correction to Mob_enh RRM TC 7.3.3.1 with TT	17.2.0
2022-03	RAN#95	R5-221813	1622	1	F	Correction to Annex F for Mob_enh RRM TCs	17.2.0
2022-03	RAN#95	R5-221821	1629	1	F	Addition of NR SL RRM TC 9.1.2.1 - SLSS Tx NR Cell	17.2.0
2022-03	RAN#95	R5-221822	1630	1	F	Addition of NR SL RRM TC 9.1.2.2 - SLSS Tx SyncRef UE	17.2.0
2022-03	RAN#95	R5-221823	1632	1	F	Addition of NR SL RRM TC 9.1.3.1 - SyncRef reselection GNSS	17.2.0
2022-03	RAN#95	R5-221824	1633	1	F	Addition of NR SL RRM TC 9.1.3.2 - SyncRef reselection Cell	17.2.0
2022-03	RAN#95	R5-221825	1636	1	F	Addition of NR SL RRM TC 9.1.4.2 - Resource pre-emption	17.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-03	RAN#95	R5-221826	1637	1	F	Addition of NR SL RRM TC 9.1.4.3 - Resource re-evaluation	17.2.0
2022-03	RAN#95	R5-221827	1640	1	F	Addition of NR SL RRM TC 9.1.5.2 - SL-RSSI PC5 only	17.2.0
2022-03	RAN#95	R5-221828	1643	1	F	Addition of RMC for NR SL RRM test in Annex A	17.2.0
2022-03	RAN#95	R5-221833	1648	1	F	Addition of 5.5.5.6 FR2 SCell BFD in non-DRX for NSA	17.2.0
2022-03	RAN#95	R5-221834	1649	1	F	Addition of 5.5.5.7 FR2 SCell BFD in DRX for NSA	17.2.0
2022-03	RAN#95	R5-221835	1651	1	F	Addition of 7.5.5.6 FR2 SCell BFD in non-DRX for SA	17.2.0
2022-03	RAN#95	R5-221836	1652	1	F	Addition of 7.5.5.7 FR2 SCell BFD in DRX for SA	17.2.0
2022-03	RAN#95	R5-221837	1654	1	F	Update to Annex F for eMIMO test cases	17.2.0
2022-03	RAN#95	R5-221838	1655	1	F	Update to Annex H for eMIMO test cases	17.2.0
2022-03	RAN#95	R5-221839	1697	1	F	Update of RRM Test Cases for UE Enhancements on MIMO	17.2.0
2022-03	RAN#95	R5-221859	1664	1	F	Correction to DRX setting of 4.6.4.5 and 6.6.4.5	17.2.0
2022-03	RAN#95	R5-221893	1590	1	F	Add test case 7.3.2.2.3 for NR SA FR2 2-step RACH	17.2.0
2022-03	RAN#95	R5-221923	1660	1	F	Correction to test procedure of SFTD measurement accuracy	17.2.0
2022-03	RAN#95	R5-221924	1677	1	F	Correction to BWP configuration for 4.5.6.1.2	17.2.0
2022-03	RAN#95	R5-221925	1673	1	F	Correction to active BWP ID and TRS configuration in 6.5.6.1.1	17.2.0
2022-03	RAN#95	R5-221926	1675	1	F	Correction to CSI-RS offset for 6.5.3.1	17.2.0
2022-03	RAN#95	R5-221927	1676	1	F	Correction to CSI report offset for 6.5.3.1	17.2.0
2022-06	RAN#96	R5-222490	1752	-	F	Correction to test time in 6.1.1.7	17.3.0
2022-06	RAN#96	R5-222491	1753	-	F	Editorial correction in 6.1.2.5	17.3.0
2022-06	RAN#96	R5-222492	1754	-	F	Correction to physical cell identity in 6.6.3.2 and 6.6.3.3	17.3.0
2022-06	RAN#96	R5-222493	1755	-	F	Correction to test procedure in 8.2.1.2	17.3.0
2022-06	RAN#96	R5-222494	1756	-	F	Correction to test procedure in 8.5.1.1	17.3.0
2022-06	RAN#96	R5-222505	1758	-	F	Correction to test parameters in 5.6.1.x and 5.6.2.x	17.3.0
2022-06	RAN#96	R5-222507	1760	-	F	Correction to DRX offset setting in 6.6.1.7	17.3.0
2022-06	RAN#96	R5-222508	1761	-	F	Correction to DRX offset setting in 6.6.3.3	17.3.0
2022-06	RAN#96	R5-222509	1762	-	F	Correction to DRX offset setting in 8.4.2.x	17.3.0
2022-06	RAN#96	R5-222517	1765	-	F	Add minimum requirements for 7.7.4	17.3.0
2022-06	RAN#96	R5-222522	1769	-	F	Remove incorrect references - Chapter 4	17.3.0
2022-06	RAN#96	R5-222523	1770	-	F	Remove incorrect references - Chapter 5	17.3.0
2022-06	RAN#96	R5-222524	1771	-	F	Remove incorrect references - Chapter 6	17.3.0
2022-06	RAN#96	R5-222525	1772	-	F	Remove incorrect references - Chapter 7	17.3.0
2022-06	RAN#96	R5-222526	1773	-	F	Remove incorrect references - Chapter 8	17.3.0
2022-06	RAN#96	R5-222527	1774	-	F	Corrections to 6.6.3.1	17.3.0
2022-06	RAN#96	R5-222528	1775	-	F	Corrections to 8.4.1.2	17.3.0
2022-06	RAN#96	R5-222529	1776	-	F	Modification to the asynchronous / synchronous cells conditions	17.3.0
2022-06	RAN#96	R5-222531	1778	-	F	Clean-up asynchronous / synchronous cells conditions for IRAT	17.3.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-06	RAN#96	R5-222532	1779	-	F	Editorial correction to H.3.4-5	17.3.0
2022-06	RAN#96	R5-222533	1780	-	F	Corrections to 5.6.1.3	17.3.0
2022-06	RAN#96	R5-222534	1781	-	F	Corrections to 5.6.1.4	17.3.0
2022-06	RAN#96	R5-222535	1782	-	F	Correction to H.3.4-7	17.3.0
2022-06	RAN#96	R5-222536	1783	-	F	Editorial correction 4.5.5.x	17.3.0
2022-06	RAN#96	R5-222633	1791	-	F	Correction to NR SL RRM TCs	17.3.0
2022-06	RAN#96	R5-222636	1792	-	F	Correction to FR1 EN-DC TC 4.7.5.1 - SFTD	17.3.0
2022-06	RAN#96	R5-222638	1794	-	F	Correction to FR1 NR SA TCs 6.1.2.2 - low priority reselection	17.3.0
2022-06	RAN#96	R5-222640	1796	-	F	Correction to inter-RAT TC 8.5.1.1 - SFTD	17.3.0
2022-06	RAN#96	R5-222882	1803	-	F	Editorial update to minimum requirement in 6.5.7.0	17.3.0
2022-06	RAN#96	R5-222887	1804	-	F	Update to minimum requirements for BFR	17.3.0
2022-06	RAN#96	R5-222890	1807	-	F	Update to FR2 SCell BFD test cases	17.3.0
2022-06	RAN#96	R5-222962	1810	-	F	Corrections AoA setup references	17.3.0
2022-06	RAN#96	R5-222964	1812	-	F	Corrections 7.6.3.1	17.3.0
2022-06	RAN#96	R5-222965	1813	-	F	Corrections 7.6.3.2	17.3.0
2022-06	RAN#96	R5-222966	1814	-	F	Corrections 7.6.3.3	17.3.0
2022-06	RAN#96	R5-222967	1815	-	F	Corrections 7.6.3.4	17.3.0
2022-06	RAN#96	R5-222968	1816	-	F	Update to 4.3.2.2.3	17.3.0
2022-06	RAN#96	R5-222969	1817	-	F	Update to 4.3.2.2.4	17.3.0
2022-06	RAN#96	R5-222970	1818	-	F	Update to 6.3.2.2.3	17.3.0
2022-06	RAN#96	R5-222971	1819	-	F	Update to 6.3.2.2.4	17.3.0
2022-06	RAN#96	R5-222998	1821	-	F	Update of 4.6.7 EN-DC FR1 L1-SINR measurement procedure	17.3.0
2022-06	RAN#96	R5-222999	1822	-	F	Update of 6.6.8 NR SA FR1 L1-SINR measurement procedure	17.3.0
2022-06	RAN#96	R5-223001	1824	-	F	Addition of 5.6.6.1 EN-DC FR2 L1-SINR measurement including Test Tolerance	17.3.0
2022-06	RAN#96	R5-223002	1825	-	F	Addition of 5.6.6.2 EN-DC FR2 L1-SINR measurement including Test Tolerance	17.3.0
2022-06	RAN#96	R5-223004	1827	-	F	Addition of 7.6.6.1 NR SA FR2 L1-SINR measurement including Test Tolerance	17.3.0
2022-06	RAN#96	R5-223007	1830	-	F	Addition of Annex E and Annex F for FR2 L1-SINR measurement	17.3.0
2022-06	RAN#96	R5-223214	1835	-	F	Editorial correction to 5G RRM TCs	17.3.0
2022-06	RAN#96	R5-223246	1836	-	F	Correction to Annexes for RRM SCell activation test cases	17.3.0
2022-06	RAN#96	R5-223305	1837	-	F	Update to eMIMO test cases 4.5.5.5 and 4.5.5.6	17.3.0
2022-06	RAN#96	R5-223605	1826	1	F	Addition of 5.6.6.3 EN-DC FR2 L1-SINR measurement including Test Tolerance	17.3.0
2022-06	RAN#96	R5-223606	1829	1	F	Addition of 7.6.6.3 NR SA FR2 L1-SINR measurement including Test Tolerance	17.3.0
2022-06	RAN#96	R5-223607	1750	1	F	Correction to EN-DC FR2 RLM tests for PSCell configured with CSI-RS-based RLM RS in non-DRX including TT	17.3.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-06	RAN#96	R5-223615	1763	1	F	Completing 5.7.4.1 including TT analysis	17.3.0
2022-06	RAN#96	R5-223616	1766	1	F	Completing 7.7.4.1 including TT analysis	17.3.0
2022-06	RAN#96	R5-223707	1823	1	F	Addition of minimum requirements for EN-DC FR2 L1-SINR measurement for beam reporting	17.3.0
2022-06	RAN#96	R5-223710	1786	1	F	Introduction of EN-DC FR2 SRS-RSRP measurement in non-DRX test case 5.6.4.1	17.3.0
2022-06	RAN#96	R5-223711	1787	1	F	Introduction of EN-DC FR2 SRS-RSRP measurement accuracy test case 5.7.5.1	17.3.0
2022-06	RAN#96	R5-223712	1797	1	F	Introduction of NR SA FR2 SRS-RSRP measurement in non-DRX test case 7.6.4.1	17.3.0
2022-06	RAN#96	R5-223713	1798	1	F	Introduction of NR SA FR2 SRS-RSRP measurement accuracy test case 7.7.5.1	17.3.0
2022-06	RAN#96	R5-223850	1777	1	F	Corrections to 4.7.5.1	17.3.0
2022-06	RAN#96	R5-223851	1784	1	F	Corrections to 4.5.5.1	17.3.0
2022-06	RAN#96	R5-223853	1808	1	F	Remove condition asynchronous cells	17.3.0
2022-06	RAN#96	R5-223854	1757	1	F	Correction to CSI-RS for tracking in 5.6.1.2	17.3.0
2022-06	RAN#96	R5-223855	1764	1	F	Completing 5.7.4.2 including TT analysis	17.3.0
2022-06	RAN#96	R5-223856	1790	1	F	Update to FR2 interruption test case 5.5.2.1	17.3.0
2022-06	RAN#96	R5-223857	1793	1	F	Correction to FR2 EN-DC BFD TCs	17.3.0
2022-06	RAN#96	R5-223858	1809	1	F	Corrections to 6.6.3.2	17.3.0
2022-06	RAN#96	R5-223859	1751	1	F	Editorial reference correction to NR SA FR2 cell re-selection test requirements	17.3.0
2022-06	RAN#96	R5-223860	1767	1	F	Completing 7.7.4.2 including TT analysis	17.3.0
2022-06	RAN#96	R5-223861	1795	1	F	Correction to FR2 NR SA BFD TCs	17.3.0
2022-06	RAN#96	R5-223862	1831	1	F	Correction of RRM test case 7.7.1.1	17.3.0
2022-06	RAN#96	R5-223863	1768	1	F	Annex F for L1-RSRP meas accuracy test cases	17.3.0
2022-06	RAN#96	R5-223864	1788	1	F	Alignment of RMC note for DRX test cases	17.3.0
2022-06	RAN#96	R5-223870	1785	2	F	Corrections to 4.5.5.2	17.3.0
2022-06	RAN#96	R5-223874	1759	1	F	Correction to Active UL BWP-2 Configuration in 4.5.6.1.1 and 6.5.6.1.2	17.3.0
2022-06	RAN#96	R5-223878	1832	1	F	Correction of UL switching test case 6.5.7.1 including Test Tolerance	17.3.0
2022-06	RAN#96	R5-223879	1833	1	F	Correction of UL switching test case 6.5.7.2 including Test Tolerance	17.3.0
2022-06	RAN#96	R5-223880	1805	1	F	Addition of eMIMO test case 6.5.5.5	17.3.0
2022-06	RAN#96	R5-223881	1806	1	F	Addition of eMIMO test case 6.5.5.6	17.3.0
2022-06	RAN#96	R5-223882	1828	1	F	Addition of 7.6.6.2 NR SA FR2 L1-SINR measurement including Test Tolerance	17.3.0
2022-06	RAN#96	R5-223886	1789	1	F	Update to FR1 Scell activation and deactivation test cases	17.3.0
2022-07	RAN#96	R5-223615	1763	1	F	addition of missing changes from R5-223615 in Tables 5.7.4.1.5-2, /-3, /-4	17.3.1

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-09	RAN#97	R5-223926	1838	-	F	Update to 2-step RACH RRM TC 7.3.2.2.4-FR2 non-contention based random access	17.4.0
2022-09	RAN#97	R5-223965	1841	-	F	Complete 5.7.1.3 including TT analysis results	17.4.0
2022-09	RAN#97	R5-223966	1842	-	F	Complete 7.7.1.3 including TT analysis results	17.4.0
2022-09	RAN#97	R5-223977	1844	-	F	Complete TC 4.3.2.2.3 including TT analysis results	17.4.0
2022-09	RAN#97	R5-223978	1845	-	F	Complete TC 4.3.2.2.4 including TT analysis results	17.4.0
2022-09	RAN#97	R5-223981	1848	-	F	Annexes for 2-step RACH test cases	17.4.0
2022-09	RAN#97	R5-224006	1851	-	F	Update of SA FR1 TC 6.3.2.1.1 and 6.3.2.1.2	17.4.0
2022-09	RAN#97	R5-224182	1854	-	F	Addition of new test case 4.7.7.1.2 EN-DC FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR relative measurement accuracy	17.4.0
2022-09	RAN#97	R5-224186	1858	-	F	Addition of new test case 4.7.7.3.2 EN-DC FR1 CSI-RS based CMR and dedicated IMR L1-SINR relative measurement accuracy	17.4.0
2022-09	RAN#97	R5-224468	1866	-	F	Corrections to 5.6.1.3 and 5.6.1.4	17.4.0
2022-09	RAN#97	R5-224469	1867	-	F	Corrections to 5.5.5.1	17.4.0
2022-09	RAN#97	R5-224470	1868	-	F	Corrections to 5.5.5.2	17.4.0
2022-09	RAN#97	R5-224471	1869	-	F	Corrections to 5.5.5.3	17.4.0
2022-09	RAN#97	R5-224472	1870	-	F	Corrections for BFD LR test cases	17.4.0
2022-09	RAN#97	R5-224474	1872	-	F	Core spec alignment 6.7.x.1 test cases	17.4.0
2022-09	RAN#97	R5-224476	1874	-	F	Correction to CSI-RS.3.2 TDD	17.4.0
2022-09	RAN#97	R5-224501	1877	-	F	Correction to Mob_enh RRM TCs 7.3.1.X - FR2 DAPS HO	17.4.0
2022-09	RAN#97	R5-224505	1878	-	F	Correction to minimum requirements in 9.1.1.0 - SL Tx timing error	17.4.0
2022-09	RAN#97	R5-224506	1879	-	F	Correction to NR SL RRM TC 9.1.1.1 - GNSS with TT	17.4.0
2022-09	RAN#97	R5-224507	1880	-	F	Correction to NR SL RRM TC 9.1.1.2 - SyncRef UE with TT	17.4.0
2022-09	RAN#97	R5-224508	1881	-	F	Correction to NR SL RRM TC 9.1.1.3 - gNB with TT	17.4.0
2022-09	RAN#97	R5-224509	1882	-	F	Correction to NR SL RRM TC 9.1.2.1 - S-SSB Tx gNB with TT	17.4.0
2022-09	RAN#97	R5-224510	1883	-	F	Correction to NR SL RRM TC 9.1.2.2 - S-SSB Tx SyncRef UE with TT	17.4.0
2022-09	RAN#97	R5-224511	1884	-	F	Correction to minimum requirements in 9.1.3.0 - SyncRef reselection	17.4.0
2022-09	RAN#97	R5-224512	1885	-	F	Correction to NR SL RRM TC 9.1.3.1 - GNSS highest priority with TT	17.4.0
2022-09	RAN#97	R5-224514	1887	-	F	Correction to NR SL RRM TC 9.1.4.1 - resource selection with TT	17.4.0
2022-09	RAN#97	R5-224515	1888	-	F	Correction to NR SL RRM TC 9.1.4.2 - resource pre-emption with TT	17.4.0
2022-09	RAN#97	R5-224517	1890	-	F	Correction to NR SL RRM TC 9.1.5.1 - CBR concurrent with TT	17.4.0
2022-09	RAN#97	R5-224518	1891	-	F	Correction to NR SL RRM TC 9.1.5.2 - CBR PC5 only with TT	17.4.0
2022-09	RAN#97	R5-224519	1892	-	F	Correction to NR SL RRM TC 9.1.6.1 - WAN interruption with TT	17.4.0
2022-09	RAN#97	R5-224546	1903	-	F	Correction to NR HST RRM TC 6.1.1.7 - intra-freq reselection	17.4.0
2022-09	RAN#97	R5-224553	1910	-	F	Correction to NR HST RRM TC 8.2.1.2 - intra-RAT reselection	17.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-09	RAN#97	R5-224635	1912	-	F	Correction to condition DRX.7 in H.3.7	17.4.0
2022-09	RAN#97	R5-224637	1914	-	F	Correction to test requirement for SFTD measurement accuracy	17.4.0
2022-09	RAN#97	R5-224645	1915	-	F	Correction to measurement delay in 4.6.4.5	17.4.0
2022-09	RAN#97	R5-224646	1916	-	F	Correction to RMSI CORESET Reference Measurement Channels in A.1.2	17.4.0
2022-09	RAN#97	R5-224647	1917	-	F	Correction to SS-SINR condition in 5.7.3.x	17.4.0
2022-09	RAN#97	R5-224648	1918	-	F	Correction to Starting PRB index for ULBWP.1.3 in A.8.2	17.4.0
2022-09	RAN#97	R5-224768	1921	-	F	Addition of minimum requirement for L1-SINR measurement in 5.7.6.0	17.4.0
2022-09	RAN#97	R5-224801	1926	-	F	Update to FR2 L1-RSRP measurement test cases 5.6.3.x	17.4.0
2022-09	RAN#97	R5-224804	1928	-	F	Test Tolerances and test case introduction for FR2 RLM test cases 7.5.1.x	17.4.0
2022-09	RAN#97	R5-225145	1935	-	F	Correction of the measurement accuracy test cases in Annex F	17.4.0
2022-09	RAN#97	R5-225146	1936	-	F	Correction of UL switching test case 6.5.7.1 including Test Tolerance	17.4.0
2022-09	RAN#97	R5-225147	1937	-	F	Correction of UL switching test case 6.5.7.2 including Test Tolerance	17.4.0
2022-09	RAN#97	R5-225148	1938	-	F	Addition of Test Tolerance for UL switching test cases in Annex F of TS 38.533	17.4.0
2022-09	RAN#97	R5-225149	1939	-	F	Correction of SA FR2-FR2 SS-RSRP measurement accuracy test case 7.7.1.2 including Test Tolerance	17.4.0
2022-09	RAN#97	R5-225152	1942	-	F	Correction of NR SA FR1 SA Idle mode CA/DC measurement for FR1 test case 6.6.9.1	17.4.0
2022-09	RAN#97	R5-225153	1943	-	F	Correction of Idle Mode inter-RAT CA/DC Measurements test case 6.6.15.1	17.4.0
2022-09	RAN#97	R5-225154	1944	-	F	Addition of E-UTRA - NR FR1 Early Measurement Reporting 8.2.2.1 test case	17.4.0
2022-09	RAN#97	R5-225213	1946	-	F	Update on number of HARQ processes for FDD RRM test cases	17.4.0
2022-09	RAN#97	R5-225230	1952	-	F	Update 6.1.1.3 test procedure	17.4.0
2022-09	RAN#97	R5-225617	1839	1	F	Correction to EN-DC FR2 RLM tests for PSCell configured with CSI-RS-based RLM RS in DRX including TT	17.4.0
2022-09	RAN#97	R5-225622	1859	1	F	Addition of new test case 6.7.9.3.2 NR SA FR1 CSI-RS based CMR and dedicated IMR L1-SINR relative measurement accuracy	17.4.0
2022-09	RAN#97	R5-225623	1861	1	F	Completion 7.7.6.2 including TT analysis results	17.4.0
2022-09	RAN#97	R5-225624	1862	1	F	Completion 7.7.6.3 including TT analysis results	17.4.0
2022-09	RAN#97	R5-225628	1846	1	F	Complete TC 6.3.2.2.3 including TT analysis results	17.4.0
2022-09	RAN#97	R5-225629	1847	1	F	Complete TC 6.3.2.2.4 including TT analysis results	17.4.0
2022-09	RAN#97	R5-225630	1927	1	F	Test Tolerances for FR2 RLM test cases 5.5.1.x	17.4.0
2022-09	RAN#97	R5-225631	1933	1	F	Correction of ENDC FR2 SSB based L1-RSRP measurement accuracy test case 5.7.4.1 including Test Tolerance	17.4.0
2022-09	RAN#97	R5-225632	1934	1	F	Correction of ENDC FR2 CSI-RS based L1-RSRP measurement accuracy test case 5.7.4.2 including Test Tolerance	17.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-09	RAN#97	R5-225633	1940	1	F	Correction of SA FR2 SSB based L1-RSRP measurement accuracy test case 7.7.4.1 including Test Tolerance	17.4.0
2022-09	RAN#97	R5-225634	1941	1	F	Correction of SA FR2 CSI-RS based L1-RSRP measurement accuracy test case 7.7.4.2 including Test Tolerance	17.4.0
2022-09	RAN#97	R5-225635	1843	1	F	Annex F for 5.7.1.3 and 7.7.1.3	17.4.0
2022-09	RAN#97	R5-225690	1853	1	F	Completion 4.7.7.1.1 and 6.7.9.1.1 including TT analysis results	17.4.0
2022-09	RAN#97	R5-225691	1855	1	F	Addition of new test case 6.7.9.1.2 NR SA FR1 CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off L1-SINR relative measurement accuracy	17.4.0
2022-09	RAN#97	R5-225692	1856	1	F	Completion 4.7.7.2 and 6.7.9.2 including TT analysis results	17.4.0
2022-09	RAN#97	R5-225693	1857	1	F	Completion 4.7.7.3.1 and 6.7.9.3.1 including TT analysis results	17.4.0
2022-09	RAN#97	R5-225725	1955	1	F	Update to Annex E and F for eMIMO test cases	17.4.0
2022-09	RAN#97	R5-225748	1945	1	F	Addition of E-UTRA - NR FR2 Early Measurement Reporting 8.2.2.2 test case	17.4.0
2022-09	RAN#97	R5-225815	1863	1	F	Correction on test applicability of HST TCs	17.4.0
2022-09	RAN#97	R5-225816	1864	1	F	Correction message contents 4.6.4.3 and 4.6.4.4	17.4.0
2022-09	RAN#97	R5-225817	1947	1	F	Clarification on SFTD delay in 4.7.5.1	17.4.0
2022-09	RAN#97	R5-225818	1931	1	F	Correction of ENDC FR2 SS-RSRP measurement accuracy test case 5.7.1.1	17.4.0
2022-09	RAN#97	R5-225819	1949	1	F	Updates on 5.7.4.1 test procedure and test requirements	17.4.0
2022-09	RAN#97	R5-225820	1951	1	F	Updates on 5.7.4.2 test procedure and test requirements	17.4.0
2022-09	RAN#97	R5-225821	1871	1	F	Correction message contents 6.6.4.3 and 6.6.4.4	17.4.0
2022-09	RAN#97	R5-225822	1930	1	F	Editorial correction to 5G RRM test case 7.6.1.x	17.4.0
2022-09	RAN#97	R5-225823	1948	1	F	Clarification on SFTD delay in 8.5.1.1	17.4.0
2022-09	RAN#97	R5-225824	1950	1	F	Corrections to Interruptions at SCell addition/release RRM tests	17.4.0
2022-09	RAN#97	R5-225846	1860	1	F	Completion 7.7.6.1 including TT analysis results	17.4.0
2022-09	RAN#97	R5-225847	1922	1	F	Addition of new test case 5.7.6.1 EN-DC FR2 L1-SINR measurement	17.4.0
2022-09	RAN#97	R5-225848	1923	1	F	Addition of new test case 5.7.6.2 EN-DC FR2 L1-SINR measurement	17.4.0
2022-09	RAN#97	R5-225849	1924	1	F	Addition of new test case 5.7.6.3 EN-DC FR2 L1-SINR measurement	17.4.0
2022-09	RAN#97	R5-225850	1932	1	F	Correction of ENDC FR2-FR2 SS-RSRP measurement accuracy test case 5.7.1.2 including Test Tolerance	17.4.0
2022-09	RAN#97	R5-225851	1886	1	F	Correction to NR SL RRM TC 9.1.3.2 - Cell highest priority with TT	17.4.0
2022-09	RAN#97	R5-225852	1889	1	F	Correction to NR SL RRM TC 9.1.4.3 - resource re-evaluation with TT	17.4.0
2022-09	RAN#97	R5-225853	1893	1	F	Correction to Annex F for NR SL RRM TCs	17.4.0
2022-09	RAN#97	R5-225855	1894	1	F	Correction to NR PS RRM TC 7.1.1.3 - intra-freq reselection low mobility with TT	17.4.0
2022-09	RAN#97	R5-225856	1895	1	F	Correction to NR PS RRM TC 7.1.1.4 - intra-freq reselection not-at-cell-edge with TT	17.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-09	RAN#97	R5-225857	1896	1	F	Correction to NR PS RRM TC 7.1.1.5 - inter-freq reselection low mobility with TT	17.4.0
2022-09	RAN#97	R5-225858	1897	1	F	Correction to NR PS RRM TC 7.1.1.6 - inter-freq reselection not-at-cell-edge with TT	17.4.0
2022-09	RAN#97	R5-225859	1898	1	F	Correction to Annex F for NR PS RRM TCs	17.4.0
2022-09	RAN#97	R5-225864	1908	1	F	Correction to NR SA FR2 RRM TC 7.1.1.1 - intra-freq reselection with TT	17.4.0
2022-09	RAN#97	R5-225865	1909	1	F	Correction to NR SA FR2 RRM TC 7.1.1.2 - inter-freq reselection with TT	17.4.0
2022-09	RAN#97	R5-225866	1911	1	F	Correction to Annex F for NR RRM TCs	17.4.0
2022-09	RAN#97	R5-225871	1919	1	F	Correction to test parameters in 5.6.3.x	17.4.0
2022-09	RAN#97	R5-225872	1925	1	F	Update of eMIMO test case 6.5.5.5 and 6.5.5.6	17.4.0
2022-09	RAN#97	R5-225876	1876	1	F	Correction to Mob_enh RRM TCs 6.3.1.X - FR1 DAPS HO	17.4.0
2022-09	RAN#97	R5-225884	1899	1	F	Correction to EN-DC FR1 RRM TC 4.5.2.X - interruption	17.4.0
2022-09	RAN#97	R5-225885	1900	1	F	Correction to EN-DC FR1 RRM TC 4.5.3.X - SCell activation	17.4.0
2022-09	RAN#97	R5-225886	1901	1	F	Correction to EN-DC FR1 RRM TC 4.5.6.1.2 - BWP switching	17.4.0
2022-09	RAN#97	R5-225887	1904	1	F	Correction to NR SA FR1 RRM TC 6.5.2.1 - interruption	17.4.0
2022-09	RAN#97	R5-225888	1905	1	F	Correction to NR SA FR1 RRM TC 6.5.3.X - SCell activation	17.4.0
2022-09	RAN#97	R5-225889	1906	1	F	Correction to NR SA FR1 RRM TC 6.5.6.1.1 - BWP switching	17.4.0
2022-12	RAN#98	R5-225962	1956	-	F	Adding NR bands n91, n92, n93 and n94 to NR band group for FR1	17.5.0
2022-12	RAN#98	R5-226113	1959	-	F	Addition of minimum requirements for RedCap RRM TCs 16.3.1.0 - FR1 HO	17.5.0
2022-12	RAN#98	R5-226114	1960	-	F	Addition of RedCap RRM TC 16.3.1.7 - inter-RAT HO 1 Rx	17.5.0
2022-12	RAN#98	R5-226116	1962	-	F	Addition of RedCap RRM TC 16.3.1.9 - inter-RAT blind HO 1 Rx	17.5.0
2022-12	RAN#98	R5-226118	1964	-	F	Addition of minimum requirements for RedCap RRM TCs 16.3.2.1.0 - FR1 Reestablish	17.5.0
2022-12	RAN#98	R5-226119	1965	-	F	Addition of RedCap RRM TC 16.3.2.1.1 - intra reestablish 1 Rx	17.5.0
2022-12	RAN#98	R5-226120	1966	-	F	Addition of RedCap RRM TC 16.3.2.1.2 - intra reestablish 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-226121	1967	-	F	Addition of RedCap RRM TC 16.3.2.1.3 - inter reestablish 1 Rx	17.5.0
2022-12	RAN#98	R5-226122	1968	-	F	Addition of RedCap RRM TC 16.3.2.1.4 - inter reestablish 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-226123	1969	-	F	Addition of RedCap RRM TC 16.3.2.1.5 - no timing reestablish 1 Rx	17.5.0
2022-12	RAN#98	R5-226124	1970	-	F	Addition of RedCap RRM TC 16.3.2.1.6 - no timing reestablish 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-226125	1971	-	F	Addition of minimum requirements for RedCap RRM TCs 16.3.2.2.0 - RACH	17.5.0
2022-12	RAN#98	R5-226126	1972	-	F	Addition of RedCap RRM TC 16.3.2.2.1 - 4 step CBRA 1 Rx	17.5.0
2022-12	RAN#98	R5-226127	1973	-	F	Addition of RedCap RRM TC 16.3.2.2.2 - 4 step CBRA 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-226128	1974	-	F	Addition of RedCap RRM TC 16.3.2.2.3 - 4 step CFRA 1 Rx	17.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-12	RAN#98	R5-226129	1975	-	F	Addition of RedCap RRM TC 16.3.2.2.4 - 4 step CFRA 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-226134	1980	-	F	Addition of minimum requirements for RedCap RRM TCs 16.3.2.3.0 - Redirection	17.5.0
2022-12	RAN#98	R5-226135	1981	-	F	Addition of RedCap RRM TC 16.3.2.3.1 - NR redirection 1 Rx	17.5.0
2022-12	RAN#98	R5-226139	1985	-	F	Addition of minimum requirements for RedCap RRM TCs 16.4.1.0 - Tx timing	17.5.0
2022-12	RAN#98	R5-226142	1988	-	F	Addition of minimum requirements for RedCap RRM TCs 16.5.1.0 - RLM	17.5.0
2022-12	RAN#98	R5-226143	1989	-	F	Addition of RedCap RRM TC 16.5.1.1 - OOS non-DRX 1 Rx	17.5.0
2022-12	RAN#98	R5-226144	1990	-	F	Addition of RedCap RRM TC 16.5.1.2 - OOS non-DRX 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-226145	1991	-	F	Addition of RedCap RRM TC 16.5.1.3 - IS non-DRX 1 Rx	17.5.0
2022-12	RAN#98	R5-226146	1992	-	F	Addition of RedCap RRM TC 16.5.1.4 - IS non-DRX 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-226147	1993	-	F	Addition of RedCap RRM TC 16.5.1.7 - IS DRX 1 Rx	17.5.0
2022-12	RAN#98	R5-226148	1994	-	F	Addition of RedCap RRM TC 16.5.1.8 - IS DRX 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-226149	1995	-	F	Addition of minimum requirements for RedCap RRM TCs 16.5.2.0 - BFD	17.5.0
2022-12	RAN#98	R5-226150	1996	-	F	Addition of RedCap RRM TC 16.5.2.1 - SSB BFR 1 Rx	17.5.0
2022-12	RAN#98	R5-226152	1998	-	F	Addition of minimum requirements for RedCap RRM TCs 16.6.1.0 - Intra-freq measurement	17.5.0
2022-12	RAN#98	R5-226153	1999	-	F	Addition of RedCap RRM TC 16.6.1.3 - no gap DRX 1 Rx	17.5.0
2022-12	RAN#98	R5-226154	2000	-	F	Addition of RedCap RRM TC 16.6.1.4 - no gap DRX 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-226155	2001	-	F	Addition of RedCap RRM TC 16.6.1.7 - gap DRX 1 Rx	17.5.0
2022-12	RAN#98	R5-226156	2002	-	F	Addition of RedCap RRM TC 16.6.1.8 - gap DRX 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-226157	2003	-	F	Addition of RedCap RRM TC 16.6.1.11 - gap non-DRX SSB index 1 Rx	17.5.0
2022-12	RAN#98	R5-226158	2004	-	F	Addition of RedCap RRM TC 16.6.1.12 - gap non-DRX SSB index 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-226159	2005	-	F	Addition of minimum requirements for RedCap RRM TCs 16.6.4.0 - L1-RSRP	17.5.0
2022-12	RAN#98	R5-226160	2006	-	F	Addition of RedCap RRM TC 16.6.4.1 - L1-RSRP non-DRX 1 Rx	17.5.0
2022-12	RAN#98	R5-226162	2008	-	F	Addition of RedCap RRM TC 16.6.4.3 - L1-RSRP DRX 1 Rx	17.5.0
2022-12	RAN#98	R5-226164	2010	-	F	Addition of minimum requirements for RedCap RRM TCs 17.3.2.1.0 - Reestablish	17.5.0
2022-12	RAN#98	R5-226165	2011	-	F	Addition of RedCap RRM TC 17.3.2.1.1 - intra reestablish with TT	17.5.0
2022-12	RAN#98	R5-226166	2012	-	F	Addition of RedCap RRM TC 17.3.2.1.2 - inter reestablish with TT	17.5.0
2022-12	RAN#98	R5-226167	2013	-	F	Addition of RedCap RRM TC 17.3.2.1.3 - no timing reestablish	17.5.0
2022-12	RAN#98	R5-226168	2014	-	F	Addition of minimum requirements for RedCap RRM TCs 17.5.1.0 - RLM	17.5.0
2022-12	RAN#98	R5-226169	2015	-	F	Addition of RedCap RRM TC 17.5.1.1 - OOS non-DRX with TT	17.5.0
2022-12	RAN#98	R5-226170	2016	-	F	Addition of RedCap RRM TC 17.5.1.2 - IS non-DRX with TT	17.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-12	RAN#98	R5-226171	2017	-	F	Addition of RedCap RRM TC 17.5.1.4 - IS DRX with TT	17.5.0
2022-12	RAN#98	R5-226172	2018	-	F	Addition of minimum requirements for RedCap RRM TCs 17.6.1.0 - Intra-freq measurement	17.5.0
2022-12	RAN#98	R5-226173	2019	-	F	Addition of RedCap RRM TC 17.6.1.1 - no gap non-DRX with TT	17.5.0
2022-12	RAN#98	R5-226174	2020	-	F	Addition of minimum requirements for RedCap RRM TCs 18.2.1.0 - L2N HO	17.5.0
2022-12	RAN#98	R5-226175	2021	-	F	Addition of RedCap RRM TC 18.2.1.1 - L2N HO with TT	17.5.0
2022-12	RAN#98	R5-226176	2022	-	F	Addition of minimum requirements for RedCap RRM TCs 18.2.2.0 - L2N redirection	17.5.0
2022-12	RAN#98	R5-226177	2023	-	F	Addition of RedCap RRM TC 18.2.2.1 - L2N redirection with TT	17.5.0
2022-12	RAN#98	R5-226178	2024	-	F	Correction to Clause 3 for RedCap RRM TCs	17.5.0
2022-12	RAN#98	R5-226180	2026	-	F	Correction to Annex B for RedCap RRM TCs	17.5.0
2022-12	RAN#98	R5-226181	2027	-	F	Correction to Annex E for RedCap RRM TCs	17.5.0
2022-12	RAN#98	R5-226183	2029	-	F	Correction to Annex G for RedCap RRM TCs	17.5.0
2022-12	RAN#98	R5-226207	2030	-	F	Correction to NR RRM TCs 4.5.2.X and 6.5.2.X - interruption	17.5.0
2022-12	RAN#98	R5-226208	2031	-	F	Correction to NR RRM TCs 4.5.3.X and 6.5.3.X - SCell activation	17.5.0
2022-12	RAN#98	R5-226209	2032	-	F	Correction to NR RRM TCs 4.5.6.1.2 and 6.5.6.1.1 - BWP switching	17.5.0
2022-12	RAN#98	R5-226212	2035	-	F	Correction to cell mapping for RRM TC 6.3.2.3.1 - redirection	17.5.0
2022-12	RAN#98	R5-226233	2039	-	F	Correction of Inter-RAT TC 8.2.1.1	17.5.0
2022-12	RAN#98	R5-226374	2041	-	F	Correction to FR2 RRC-based DL active BWP switch	17.5.0
2022-12	RAN#98	R5-226497	2044	-	F	Corrections to 4.6.4.4	17.5.0
2022-12	RAN#98	R5-226501	2048	-	F	Corrections to 5.6.3.3	17.5.0
2022-12	RAN#98	R5-226502	2049	-	F	Corrections to 6.6.4.1	17.5.0
2022-12	RAN#98	R5-226503	2050	-	F	Corrections to 6.6.4.2	17.5.0
2022-12	RAN#98	R5-226504	2051	-	F	Corrections to 6.6.4.3	17.5.0
2022-12	RAN#98	R5-226505	2052	-	F	Corrections to 6.6.4.4	17.5.0
2022-12	RAN#98	R5-226506	2053	-	F	Corrections to 6.5.5.3	17.5.0
2022-12	RAN#98	R5-226507	2054	-	F	Corrections to 6.5.5.4	17.5.0
2022-12	RAN#98	R5-226508	2055	-	F	Corrections to 6.5.6.2.1	17.5.0
2022-12	RAN#98	R5-226509	2056	-	F	Corrections to 8.4.2.9	17.5.0
2022-12	RAN#98	R5-226510	2057	-	F	Corrections to 8.2.1.1	17.5.0
2022-12	RAN#98	R5-226511	2058	-	F	Corrections to 8.2.1.2	17.5.0
2022-12	RAN#98	R5-226516	2060	-	F	Update to RRM TC 4A.1.1.1	17.5.0
2022-12	RAN#98	R5-226647	2063	-	F	Update to test case 6.6.3.1 and 6.6.3.2	17.5.0
2022-12	RAN#98	R5-226649	2065	-	F	Addition of test case 7.4.3.1	17.5.0
2022-12	RAN#98	R5-226650	2066	-	F	Addition of test case 7.5.2.1	17.5.0
2022-12	RAN#98	R5-226652	2067	-	F	Addition of test 7.3.1.1, 7.3.1.2, 7.3.1.3	17.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-12	RAN#98	R5-226653	2068	-	F	Update to tests 5.5.2.3 and 5.5.2.4	17.5.0
2022-12	RAN#98	R5-226698	2076	-	F	Update on the delta(Max-Min) rules for 5.7.1.1	17.5.0
2022-12	RAN#98	R5-226699	2077	-	F	Update on the delta(Max-Min) rules for 5.7.1.2	17.5.0
2022-12	RAN#98	R5-226775	2078	-	F	Addition of CCA model, RMC into Annex for NR-U	17.5.0
2022-12	RAN#98	R5-227003	2085	-	F	Update on the delta(Max-Min) rules for 7.7.1.1	17.5.0
2022-12	RAN#98	R5-227004	2086	-	F	Update on the delta(Max-Min) rules for 7.7.1.2	17.5.0
2022-12	RAN#98	R5-227005	2087	-	F	Corrections to 7.5.1.1	17.5.0
2022-12	RAN#98	R5-227006	2088	-	F	Corrections to 7.5.1.2	17.5.0
2022-12	RAN#98	R5-227007	2089	-	F	Corrections to 7.5.1.3	17.5.0
2022-12	RAN#98	R5-227008	2090	-	F	Corrections to 7.5.1.4	17.5.0
2022-12	RAN#98	R5-227096	2094	-	F	Correction to RadioLinkMonitoringConfig	17.5.0
2022-12	RAN#98	R5-227097	2095	-	F	Correction to CSI-Report periodicity in procedure of 5.7.4.1	17.5.0
2022-12	RAN#98	R5-227098	2096	-	F	Correction to EUTRA PCell and NR PSCell interruption requirement in 4.5.6.1.2	17.5.0
2022-12	RAN#98	R5-227100	2098	-	F	Correction to radioBearerConfig in RRCReconfiguration-HO	17.5.0
2022-12	RAN#98	R5-227182	2101	-	F	Correction of minimum conformance requirements for E-UTRA - NR Early Measurement Reporting test cases	17.5.0
2022-12	RAN#98	R5-227188	2105	-	F	Minimum conformance requirements for EN-DC FR1 interruptions at SRS carrier-based switching test cases	17.5.0
2022-12	RAN#98	R5-227189	2106	-	F	Addition of EN-DC FR1 interruptions at NR SRS carrier based switching test case 4.5.2.8	17.5.0
2022-12	RAN#98	R5-227190	2107	-	F	Addition of EN-DC FR1 interruptions at NR SRS carrier based switching test case 4.5.2.9	17.5.0
2022-12	RAN#98	R5-227191	2108	-	F	Minimum conformance requirements for EN-DC FR2 interruptions at SRS carrier-based switching test cases	17.5.0
2022-12	RAN#98	R5-227192	2109	-	F	Addition of EN-DC FR2 interruptions at E-UTRA SRS carrier-based switching test case 5.5.2.7	17.5.0
2022-12	RAN#98	R5-227193	2110	-	F	Addition of EN-DC FR2 interruptions at NR SRS carrier-based switching test case 5.5.2.8	17.5.0
2022-12	RAN#98	R5-227194	2111	-	F	Minimum conformance requirements for SA FR1 interruptions at SRS carrier-based switching test cases	17.5.0
2022-12	RAN#98	R5-227196	2113	-	F	Minimum conformance requirements for Inter-frequency measurement without measurement gaps	17.5.0
2022-12	RAN#98	R5-227197	2114	-	F	Addition of SA event triggered reporting with additional mandatory gap pattern test case 6.6.2.9	17.5.0
2022-12	RAN#98	R5-227198	2115	-	F	Addition of SA FR1 event triggered reporting without gap when DRX is used test case 6.6.2.10	17.5.0
2022-12	RAN#98	R5-227199	2116	-	F	Addition of SA event triggered reporting tests for FR1 without gap when DRX is not used test case 6.6.2.11	17.5.0
2022-12	RAN#98	R5-227207	2123	-	F	Correction of minimum conformance requirements for intra-freq measurement cases	17.5.0
2022-12	RAN#98	R5-227211	2127	-	F	Addition of NR SA FR1 Cell reselection RedCap test case 16.1.1.2	17.5.0
2022-12	RAN#98	R5-227212	2128	-	F	Addition of NR SA FR1 Cell reselection RedCap test case 16.1.1.3	17.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-12	RAN#98	R5-227213	2129	-	F	Addition of NR SA FR1 Cell reselection RedCap test case 16.1.1.4	17.5.0
2022-12	RAN#98	R5-227214	2130	-	F	Addition of NR SA FR1 Cell reselection RedCap test case 16.1.1.5	17.5.0
2022-12	RAN#98	R5-227215	2131	-	F	Addition of NR SA FR1 Cell reselection RedCap test case 16.1.1.6	17.5.0
2022-12	RAN#98	R5-227216	2132	-	F	Addition of NR SA FR1 Cell reselection RedCap test case 16.1.1.7	17.5.0
2022-12	RAN#98	R5-227217	2133	-	F	Addition of NR SA FR1 Cell reselection RedCap test case 16.1.1.8	17.5.0
2022-12	RAN#98	R5-227335	2138	-	F	Correction in 6.1.1.4 test case	17.5.0
2022-12	RAN#98	R5-227337	2139	-	F	Correction in 6.1.2.4 test case	17.5.0
2022-12	RAN#98	R5-227340	2142	-	F	Correction on MU definition for BWP switch test cases	17.5.0
2022-12	RAN#98	R5-227342	2144	-	F	Updates to L1-RSRP NSA FR1 test cases	17.5.0
2022-12	RAN#98	R5-227347	2147	-	F	Updates to L1-RSRP SA FR2 test cases	17.5.0
2022-12	RAN#98	R5-227990	2135	1	F	Updates to CLI Measurement test case 5.6.4.1, 5.7.5.1, 7.6.4.1 and 7.7.5.1	17.5.0
2022-12	RAN#98	R5-227643	1957	2	F	Update of EN-DC FR1 TC 4.5.7.1	17.5.0
2022-12	RAN#98	R5-226817	2079	-	F	Update of RRM Test Case 5.5.3.1 EN-DC FR2 SCell activation and deactivation intra-band in non-DRX	17.5.0
2022-12	RAN#98	R5-227645	2093	1	F	Correction to FR2 NSA RLM test cases	17.5.0
2022-12	RAN#98	R5-227817	2071	1	F	Editorial update to RACH tests	17.5.0
2022-12	RAN#98	R5-227827	2025	1	F	Correction to Annex A for RedCap RRM TCs	17.5.0
2022-12	RAN#98	R5-227828	2126	1	F	Addition of NR SA FR1 Cell reselection RedCap test case 16.1.1.1	17.5.0
2022-12	RAN#98	R5-227829	2134	1	F	Addition of NR - E-UTRA cell re-selection test cases for RedCap	17.5.0
2022-12	RAN#98	R5-227830	2112	1	F	Addition of NR FR1 interruptions at SRS carrier-based switching test case 6.5.2.2	17.5.0
2022-12	RAN#98	R5-227831	2080	1	F	Modification of description of tables of test requirement for EN-DC FR2 eMIMO measurement	17.5.0
2022-12	RAN#98	R5-227832	2082	1	F	Modification of description of tables of test requirement for NR SA FR2 eMIMO measurement	17.5.0
2022-12	RAN#98	R5-227833	2059	1	F	Corrections to 6.1.2.5	17.5.0
2022-12	RAN#98	R5-227834	2141	1	F	Update on priority cell configuration in 8.2.1.2	17.5.0
2022-12	RAN#98	R5-227835	2061	1	F	Update to RRM TC 4A.1.2	17.5.0
2022-12	RAN#98	R5-227836	2062	1	F	Update to RRM TC 4A.2.1	17.5.0
2022-12	RAN#98	R5-227837	2081	1	F	Modification of description of tables of test requirement for EN-DC FR2 L1-RSRP measurement	17.5.0
2022-12	RAN#98	R5-227838	2083	1	F	Modification of description of tables of test requirement for NR SA FR2 L1-RSRP measurement	17.5.0
2022-12	RAN#98	R5-227839	2092	1	F	Correction to FR2 NSA BFR test cases	17.5.0
2022-12	RAN#98	R5-227844	2104	1	F	Addition of CADC enhancement test cases to Annex E and F including Test Tolerance	17.5.0
2022-12	RAN#98	R5-227845	2028	1	F	Correction to Annex F for RedCap RRM TCs	17.5.0
2022-12	RAN#98	R5-227861	2117	1	F	Correction of minimum conformance requirements for intra-freq measurement cases to include HST_enh	17.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-12	RAN#98	R5-227862	2118	1	F	Addition of EN-DC FR1 intra-freq measurement HST_enh test case 4.6.1.8	17.5.0
2022-12	RAN#98	R5-227863	2119	1	F	Correction of minimum conformance requirements for inter-freq measurement cases to include HST_enh	17.5.0
2022-12	RAN#98	R5-227864	2120	1	F	Addition of EN-DC FR1 inter-freq measurement HST_enh test case 4.6.2.9	17.5.0
2022-12	RAN#98	R5-227865	2121	1	F	Correction of minimum conformance requirements for NR SA reselection cases	17.5.0
2022-12	RAN#98	R5-227866	2122	1	F	Addition of EN-DC FR1 Cell reselection in HST scenario test case 6.1.1.8	17.5.0
2022-12	RAN#98	R5-227867	2124	1	F	Addition of SA FR1 intra-freq measurement HST_enh test case 6.6.1.8	17.5.0
2022-12	RAN#98	R5-227868	2125	1	F	Addition of SA FR1 intra-freq measurement HST_enh test case 6.6.2.12	17.5.0
2022-12	RAN#98	R5-227977	2099	1	F	Correction of NR SA FR1 Idle mode CA/DC measurement for FR1 test case 6.6.9.1 including Test Tolerance	17.5.0
2022-12	RAN#98	R5-227978	2100	1	F	Correction of Idle Mode inter-RAT CA/DC Measurements test case 6.6.15.1 including Test Tolerance	17.5.0
2022-12	RAN#98	R5-227979	2102	1	F	Correction of E-UTRA - NR FR1 Early Measurement Reporting 8.2.2.1 test case including Test Tolerance	17.5.0
2022-12	RAN#98	R5-227980	2103	1	F	Correction of E-UTRA - NR FR2 Early Measurement Reporting 8.2.2.2 test case including Test Tolerance	17.5.0
2022-12	RAN#98	R5-227992	2073	1	F	Addition of BFD and Link recovery test cases for NR-U	17.5.0
2022-12	RAN#98	R5-227993	2136	1	F	Addition of EN-DC FR1 RLM test cases under CCA configuration	17.5.0
2022-12	RAN#98	R5-227994	2072	1	F	Update to L1-RSRP measurement accuracy test cases	17.5.0
2022-12	RAN#98	R5-227995	2038	1	F	Correction of SA FR1 TC 6.3.2.2.1	17.5.0
2022-12	RAN#98	R5-227996	2064	1	F	Addition of test case 7.4.1.1	17.5.0
2022-12	RAN#98	R5-227998	2069	1	F	Update to tests 4.5.3.1 and 6.5.3.1	17.5.0
2022-12	RAN#98	R5-227999	2137	1	F	Update on message content for 5.6.1.1 and 5.6.1.3	17.5.0
2022-12	RAN#98	R5-228000	2143	1	F	Corrections to EN-DC FR2 radio link monitoring TCs 5.5.1.1, 5.1.2, 5.5.1.3 and 5.5.1.4	17.5.0
2022-12	RAN#98	R5-228001	2036	1	F	Correction to Mob_enh RRM TCs 6.3.1.x and 7.3.1.x - DAPS HO	17.5.0
2022-12	RAN#98	R5-228002	2070	1	F	Update to CSI-RS RRM tables	17.5.0
2022-12	RAN#98	R5-228003	1958	1	F	Update of SA FR2 TC 7.5.7.1	17.5.0
2022-12	RAN#98	R5-228004	2033	1	F	Correction to NR RRM TCs 4.6.4.X and 6.6.4.X - CSI-RS based L1-RSRP	17.5.0
2022-12	RAN#98	R5-228013	1961	1	F	Addition of RedCap RRM TC 16.3.1.8 - inter-RAT HO 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-228014	1963	1	F	Addition of RedCap RRM TC 16.3.1.10 - inter-RAT blind HO 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-228015	1976	1	F	Addition of RedCap RRM TC 16.3.2.2.5 - 2 step CBRA 1 Rx	17.5.0
2022-12	RAN#98	R5-228016	1977	1	F	Addition of RedCap RRM TC 16.3.2.2.6 - 2 step CBRA 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-228017	1978	1	F	Addition of RedCap RRM TC 16.3.2.2.7 - 2 step CFRA 1 Rx	17.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-12	RAN#98	R5-228018	1979	1	F	Addition of RedCap RRM TC 16.3.2.2.8 - 2 step CFRA 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-228019	1982	1	F	Addition of RedCap RRM TC 16.3.2.3.2 - NR redirection 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-228020	1983	1	F	Addition of RedCap RRM TC 16.3.2.3.3 - LTE redirection 1 Rx	17.5.0
2022-12	RAN#98	R5-228021	1984	1	F	Addition of RedCap RRM TC 16.3.2.3.4 - LTE redirection 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-228022	1986	1	F	Addition of RedCap RRM TC 16.4.1.1 - Tx timing 1 Rx with TT	17.5.0
2022-12	RAN#98	R5-228023	1987	1	F	Addition of RedCap RRM TC 16.4.1.2 - Tx timing 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-228024	1997	1	F	Addition of RedCap RRM TC 16.5.2.2 - SSB BFR 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-228025	2007	1	F	Addition of RedCap RRM TC 16.6.4.2 - L1-RSRP non-DRX 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-228026	2009	1	F	Addition of RedCap RRM TC 16.6.4.4 - L1-RSRP DRX 2 Rx with TT	17.5.0
2022-12	RAN#98	R5-228027	2140	1	F	Corrections to SA FR1 SCell activation and deactivation delay TCs 6.5.3.1, 6.5.3.2 and 6.5.3.3	17.5.0
2022-12	RAN#98	R5-228028	2146	1	F	Updates to L1-RSRP SA FR1 test cases	17.5.0
2022-12	RAN#98	R5-228029	2145	1	F	Updates to L1-RSRP NSA FR2 test cases	17.5.0
2023-03	RAN#99	R5-230045	2148	-	F	Addition of minimum requirements for FR1 6.6.18.0 - concurrent gaps	17.6.0
2023-03	RAN#99	R5-230046	2149	-	F	Addition of test case 6.6.18.1 - non-overlapping scenario	17.6.0
2023-03	RAN#99	R5-230047	2150	-	F	Correction to table E.4-1 for concurrent gap TCs.	17.6.0
2023-03	RAN#99	R5-230076	2151	-	F	Adding NR bands n100, n101 to NR band group for FR1	17.6.0
2023-03	RAN#99	R5-230185	2154	-	F	Addition of test case 6.6.18.2 - partial-overlapping scenario	17.6.0
2023-03	RAN#99	R5-230431	2161	-	F	Update of NR Inter-RAT event triggered reporting tests for FR2 test cases 8.4.2.5 including Test tolerance	17.6.0
2023-03	RAN#99	R5-230433	2162	-	F	Update of NR Inter-RAT event triggered reporting tests for FR2 test cases including Test Tolerance	17.6.0
2023-03	RAN#99	R5-230459	2170	-	F	Addition of RedCap RRM TC 16.3.1.1 - intra known HO 1Rx	17.6.0
2023-03	RAN#99	R5-230465	2176	-	F	Addition of RedCap RRM TC 16.4.3.1 - TA accuracy 1Rx with TT	17.6.0
2023-03	RAN#99	R5-230466	2177	-	F	Addition of RedCap RRM TC 16.4.3.2 - TA accuracy 2Rx with TT	17.6.0
2023-03	RAN#99	R5-230467	2178	-	F	Addition of RedCap RRM TC 16.5.1.9 - OOS non-DRX 1Rx	17.6.0
2023-03	RAN#99	R5-230470	2181	-	F	Addition of RedCap RRM TC 16.5.1.12 - IS non-DRX 2Rx with TT	17.6.0
2023-03	RAN#99	R5-230471	2182	-	F	Addition of RedCap RRM TC 16.5.1.13 - OOS DRX 1Rx	17.6.0
2023-03	RAN#99	R5-230474	2185	-	F	Addition of RedCap RRM TC 16.5.1.16 - IS DRX 2Rx with TT	17.6.0
2023-03	RAN#99	R5-230475	2186	-	F	Addition of RedCap RRM TC 16.5.2.5 - BFR non-DRX 1Rx	17.6.0
2023-03	RAN#99	R5-230476	2187	-	F	Addition of RedCap RRM TC 16.5.2.6 - BFR non-DRX 2Rx with TT	17.6.0
2023-03	RAN#99	R5-230477	2188	-	F	Addition of RedCap RRM TC 16.5.2.7 - BFR DRX 1Rx	17.6.0
2023-03	RAN#99	R5-230478	2189	-	F	Addition of RedCap RRM TC 16.5.2.8 - BFR DRX 2Rx with TT	17.6.0
2023-03	RAN#99	R5-230483	2194	-	F	Addition of RedCap RRM TC 16.6.1.5 - intra gap based non-DRX 1Rx	17.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-03	RAN#99	R5-230484	2195	-	F	Addition of RedCap RRM TC 16.6.1.6 - intra gap based non-DRX 2Rx with TT	17.6.0
2023-03	RAN#99	R5-230487	2198	-	F	Addition of RedCap RRM TC 16.6.4.5 - CSI-RS L1-RSRP 1Rx	17.6.0
2023-03	RAN#99	R5-230488	2199	-	F	Addition of RedCap RRM TC 16.6.4.6 - CSI-RS L1-RSRP 2Rx with TT	17.6.0
2023-03	RAN#99	R5-230489	2200	-	F	Addition of RedCap RRM TC 16.6.4.7 - CSI-RS L1-RSRP DRX 1Rx	17.6.0
2023-03	RAN#99	R5-230491	2202	-	F	Addition of RedCap RRM TC 17.3.2.2.1 - 4-step CBRA	17.6.0
2023-03	RAN#99	R5-230492	2203	-	F	Addition of RedCap RRM TC 17.3.2.2.2 - 4-step CFRA	17.6.0
2023-03	RAN#99	R5-230493	2204	-	F	Addition of RedCap RRM TC 17.3.2.2.3 - 2-step CBRA	17.6.0
2023-03	RAN#99	R5-230494	2205	-	F	Addition of RedCap RRM TC 17.3.2.2.4 - 2-step CFRA	17.6.0
2023-03	RAN#99	R5-230495	2206	-	F	Addition of RedCap RRM TC 17.5.1.9 - RLM scheduling restriction	17.6.0
2023-03	RAN#99	R5-230499	2210	-	F	Addition of RedCap RRM TC 17.6.1.3 - intra gap-based non-DRX	17.6.0
2023-03	RAN#99	R5-230500	2211	-	F	Addition of RedCap RRM TC 17.6.1.4 - intra gap-based DRX	17.6.0
2023-03	RAN#99	R5-230502	2213	-	F	Addition of RedCap RRM TC 17.6.3.2 - SSB L1-RSRP DRX	17.6.0
2023-03	RAN#99	R5-230503	2214	-	F	Addition of RedCap RRM TC 17.6.3.3 - CSI-RS L1-RSRP non-DRX	17.6.0
2023-03	RAN#99	R5-230504	2215	-	F	Addition of RedCap RRM TC 17.6.3.4 - CSI-RS L1-RSRP DRX	17.6.0
2023-03	RAN#99	R5-230505	2216	-	F	Addition of RedCap RRM TC 18.3.1.1 - FR1 NR meas no-DRX with TT	17.6.0
2023-03	RAN#99	R5-230506	2217	-	F	Addition of RedCap RRM TC 18.3.1.2 - FR1 NR meas DRX with TT	17.6.0
2023-03	RAN#99	R5-230507	2218	-	F	Addition of RedCap RRM TC 18.3.1.3 - FR1 NR meas no-DRX SBI with TT	17.6.0
2023-03	RAN#99	R5-230508	2219	-	F	Addition of RedCap RRM TC 18.3.1.4 - FR1 NR meas DRX SBI with TT	17.6.0
2023-03	RAN#99	R5-230509	2220	-	F	Addition of RedCap RRM TC 18.3.1.5 - FR2 NR meas no-DRX	17.6.0
2023-03	RAN#99	R5-230510	2221	-	F	Addition of RedCap RRM TC 18.3.1.6 - FR2 NR meas DRX	17.6.0
2023-03	RAN#99	R5-230511	2222	-	F	Addition of RedCap RRM TC 18.3.1.7 - FR2 NR meas no-DRX SBI	17.6.0
2023-03	RAN#99	R5-230512	2223	-	F	Addition of RedCap RRM TC 18.3.1.8 - FR2 NR meas DRX SBI	17.6.0
2023-03	RAN#99	R5-230513	2224	-	F	Correction to Annex A for RedCap RRM TCs	17.6.0
2023-03	RAN#99	R5-230514	2225	-	F	Correction to Annex E for RedCap RRM TCs	17.6.0
2023-03	RAN#99	R5-230515	2226	-	F	Correction to Annex F for RedCap RRM TCs	17.6.0
2023-03	RAN#99	R5-230528	2228	-	F	Correction to Annex A for RRM enhancement TCs	17.6.0
2023-03	RAN#99	R5-230529	2229	-	F	Correction to Annex E for RRM enhancement TCs	17.6.0
2023-03	RAN#99	R5-230530	2230	-	F	Correction to Annex F for RRM enhancement TCs	17.6.0
2023-03	RAN#99	R5-230532	2231	-	F	Correction to FR1 NR SA RRM TC 6.3.1.3 - inter unknown HO	17.6.0
2023-03	RAN#99	R5-230725	2235	-	F	Correction to FR2 EN-DC test case 5.3.2.2.x	17.6.0
2023-03	RAN#99	R5-230774	2236	-	F	Update to RRC based BWP switch in FR2	17.6.0
2023-03	RAN#99	R5-230777	2237	-	F	Addition of TT for SA FR2 handover test cases	17.6.0
2023-03	RAN#99	R5-230780	2238	-	F	Addition of SA FR2-FR2 RRC Connection Release with Redirection test case	17.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-03	RAN#99	R5-230782	2239	-	F	Addition of NR-U NSA intra-frequency event-triggered measurement reporting test cases	17.6.0
2023-03	RAN#99	R5-230783	2240	-	F	Addition of NR-U SA FR1 RLM and BFR test cases	17.6.0
2023-03	RAN#99	R5-230784	2241	-	F	Update to NR-U NSA RLM and BFR test cases	17.6.0
2023-03	RAN#99	R5-230867	2252	-	F	Correct Test procedure for RLM-SSB Based FR2 5.5.1.4	17.6.0
2023-03	RAN#99	R5-230929	2253	-	F	Update TC 4A.1.1.1 with TT analysis results	17.6.0
2023-03	RAN#99	R5-230930	2254	-	F	Update TC 4A.2.1.1 with TT analysis results	17.6.0
2023-03	RAN#99	R5-230931	2255	-	F	Minimum requirements for TC 4A.2.1.1	17.6.0
2023-03	RAN#99	R5-230932	2256	-	F	Update Annex F for NE-DC test cases	17.6.0
2023-03	RAN#99	R5-230938	2257	-	F	Removal of Editor Note for EN-DC FR2 L1-SINR measurement test cases	17.6.0
2023-03	RAN#99	R5-230939	2258	-	F	Removal of Editor Note for NR SA FR2 L1-SINR measurement test cases	17.6.0
2023-03	RAN#99	R5-230985	2260	-	F	Clarification on the test procedure of 5.7.1.2 and 7.7.1.2	17.6.0
2023-03	RAN#99	R5-230987	2262	-	F	Correction to message exceptions of 5.7.4.2	17.6.0
2023-03	RAN#99	R5-230988	2263	-	F	Correction to configuration number of 6.3.2.3.2	17.6.0
2023-03	RAN#99	R5-230989	2264	-	F	Correction to Offset value in CSI-RS RMCs table	17.6.0
2023-03	RAN#99	R5-230990	2265	-	F	Correction to L1-RSRP report delay requirement	17.6.0
2023-03	RAN#99	R5-231005	2267	-	F	Correction to 4.5.2.6	17.6.0
2023-03	RAN#99	R5-231006	2268	-	F	Correction to 4.5.3.x	17.6.0
2023-03	RAN#99	R5-231007	2269	-	F	Correction to 4.5.5.3	17.6.0
2023-03	RAN#99	R5-231009	2271	-	F	Correction to 4.5.6.1.x	17.6.0
2023-03	RAN#99	R5-231010	2272	-	F	Correction to 4.5.7.1	17.6.0
2023-03	RAN#99	R5-231011	2273	-	F	Corrections to 5.6.1.x	17.6.0
2023-03	RAN#99	R5-231012	2274	-	F	Corrections 5.6.3.3 and 5.6.3.4	17.6.0
2023-03	RAN#99	R5-231013	2275	-	F	Correction to RLM test cases EN-DC FR2	17.6.0
2023-03	RAN#99	R5-231014	2276	-	F	Correction to RLM test cases NR FR1	17.6.0
2023-03	RAN#99	R5-231015	2277	-	F	Correction to 6.5.3.x	17.6.0
2023-03	RAN#99	R5-231016	2278	-	F	Correction to 6.5.6.1.x	17.6.0
2023-03	RAN#99	R5-231017	2279	-	F	Correction to RLM test cases NR FR2	17.6.0
2023-03	RAN#99	R5-231018	2280	-	F	Correction in Annex F for 5.6.3.4	17.6.0
2023-03	RAN#99	R5-231019	2281	-	F	Corrections to 16.3.2.3.2	17.6.0
2023-03	RAN#99	R5-231020	2282	-	F	Corrections to 16.6.1.8	17.6.0
2023-03	RAN#99	R5-231025	2284	-	F	Addition of eMG TC 6.6.18.3	17.6.0
2023-03	RAN#99	R5-231026	2285	-	F	Addition of eMG TC 6.6.18.4	17.6.0
2023-03	RAN#99	R5-231111	2286	-	F	Addition of the editors note regarding the principle of testing on mix of E-UTRA and NR FR2 carriers in clause 5	17.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-03	RAN#99	R5-231112	2287	-	F	Addition of the editors note regarding the principle of testing on mix of E-UTRA and NR FR2 carriers in clause 7	17.6.0
2023-03	RAN#99	R5-231114	2289	-	F	Editorial corrections of RedCap test cases	17.6.0
2023-03	RAN#99	R5-231123	2298	-	F	Addition of NR - E-UTRA cell re-selection test case 16.1.2.1	17.6.0
2023-03	RAN#99	R5-231124	2299	-	F	Addition of NR - E-UTRA cell re-selection test case 16.1.2.2 including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231125	2300	-	F	Addition of NR - E-UTRA cell re-selection test case 16.1.2.3	17.6.0
2023-03	RAN#99	R5-231126	2301	-	F	Addition of NR - E-UTRA cell re-selection test case 16.1.2.4 including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231127	2302	-	F	Addition of NR - E-UTRA cell re-selection test case 16.1.2.5	17.6.0
2023-03	RAN#99	R5-231128	2303	-	F	Addition of NR - E-UTRA cell re-selection test case 16.1.2.6 including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231129	2304	-	F	Addition of new NR SA FR1 Event triggered reporting RedCap test case	17.6.0
2023-03	RAN#99	R5-231130	2305	-	F	Addition of NR SA FR2 Cell reselection to FR2 intra-frequency NR case for 2 Rx 17.1.1.1	17.6.0
2023-03	RAN#99	R5-231131	2306	-	F	Addition of NR SA FR2-FR2 Cell reselection to FR2 inter-frequency NR for 2 Rx 17.1.1.2	17.6.0
2023-03	RAN#99	R5-231132	2307	-	F	Addition of NR SA FR2 Cell reselection to FR2 intra-frequency NR for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE 17.1.1.3	17.6.0
2023-03	RAN#99	R5-231133	2308	-	F	Addition of NR SA FR2-FR2 Cell reselection to FR2 inter-frequency NR for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE 17.1.1.4	17.6.0
2023-03	RAN#99	R5-231134	2309	-	F	Addition of E-UTRA - NR SA FR1 E-UTRA Cell reselection to higher priority NR target Cell in FR1 18.1.1.1	17.6.0
2023-03	RAN#99	R5-231135	2310	-	F	Annex E and F correction for RedCap reselection test cases including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231144	2312	-	F	Correction of E-UTRA - NR FR1 Early Measurement Reporting 8.2.2.1 test case including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231150	2315	-	F	Correction of EN-DC FR1 HST event triggered reporting test case 4.6.1.8	17.6.0
2023-03	RAN#99	R5-231155	2320	-	F	Correction of cell mapping in Annex E for FR1 HST test cases	17.6.0
2023-03	RAN#99	R5-231223	2321	-	F	Correction of NR SA FR1 Idle mode CA/DC measurement for FR1 test case 6.6.9.1 - resubmission	17.6.0
2023-03	RAN#99	R5-231234	2323	-	F	Corrections in 7.6.2.2 and 7.6.2.4 Test Procedures	17.6.0
2023-03	RAN#99	R5-231239	2324	-	F	Update Message Contents 4.5.2.5 and 4.5.2.6 test cases	17.6.0
2023-03	RAN#99	R5-231240	2325	-	F	Update 5.6.2.4 test applicability	17.6.0
2023-03	RAN#99	R5-231271	2327	-	F	Update Message Contents 8.4.2.7 and 8.4.2.8 test cases	17.6.0
2023-03	RAN#99	R5-231272	2328	-	F	Correction to CSI RS based L1-measurement tests 4.6.4.3, 4.6.4.4,6.6.4.3 and 6.6.4.4	17.6.0
2023-03	RAN#99	R5-231274	2330	-	F	Updated correct Event A4 in test procedure for EN-DC FR1-FR2 event-triggered reporting	17.6.0
2023-03	RAN#99	R5-231275	2331	-	F	Update of SA FR1 TC 6.1.1.1 and 6.1.2.1	17.6.0
2023-03	RAN#99	R5-231276	2332	-	F	Correction in Measurement uncertainty table Annex F	17.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-03	RAN#99	R5-231317	2334	-	F	Update to test case 6.6.3.1 and 6.6.3.2	17.6.0
2023-03	RAN#99	R5-231706	2270	1	F	Correction to 4.5.5.4	17.6.0
2023-03	RAN#99	R5-231707	2259	1	F	Correction to firstActiveUplinkBWP-Id in uplinkConfig for non-contention RA TCs	17.6.0
2023-03	RAN#99	R5-231708	2232	1	F	Correction to FR1 NR SA RRM TC 6.7.3.2.1 - SS-SINR	17.6.0
2023-03	RAN#99	R5-231709	2316	1	F	Correction of EN-DC FR1 HST event triggered reporting test case 4.6.2.9	17.6.0
2023-03	RAN#99	R5-231710	2319	1	F	Correction of SA FR1 HST event triggered reporting test case 6.6.2.12	17.6.0
2023-03	RAN#99	R5-231711	2243	1	F	Addition of CG-SDT test case	17.6.0
2023-03	RAN#99	R5-231712	2152	1	F	Addition of CG-SDT RRM test case for FR2	17.6.0
2023-03	RAN#99	R5-231713	2245	1	F	Add new RRC messages and information elements contents for TS38.533 Annex H.3	17.6.0
2023-03	RAN#99	R5-231714	2246	1	F	add test case for TS38.533 clause 4.5.5.7	17.6.0
2023-03	RAN#99	R5-231715	2247	1	F	add test case for TS38.533 clause 4.5.5.8	17.6.0
2023-03	RAN#99	R5-231716	2248	1	F	add test case for TS38.533 clause 5.5.5.8	17.6.0
2023-03	RAN#99	R5-231717	2249	1	F	add test case for TS38.533 clause 6.5.5.7	17.6.0
2023-03	RAN#99	R5-231718	2250	1	F	add test case for TS38.533 clause 7.5.5.9	17.6.0
2023-03	RAN#99	R5-231719	2251	1	F	add test case for TS38.533 clause 7.5.5.10	17.6.0
2023-03	RAN#99	R5-231720	2169	1	F	Addition of pass fail limits for CBR test cases	17.6.0
2023-03	RAN#99	R5-231721	2207	1	F	Addition of RedCap RRM TC 17.5.2.3 - CSI-RS BFR non-DRX	17.6.0
2023-03	RAN#99	R5-231722	2208	1	F	Addition of RedCap RRM TC 17.5.2.4 - CSI-RS BFR DRX	17.6.0
2023-03	RAN#99	R5-231723	2209	1	F	Addition of RedCap RRM TC 17.5.2.5 - BFR scheduling restriction	17.6.0
2023-03	RAN#99	R5-231724	2212	1	F	Addition of RedCap RRM TC 17.6.3.1 - SSB L1-RSRP non-DRX	17.6.0
2023-03	RAN#99	R5-231725	2283	1	F	Corrections to 16.6.1.12	17.6.0
2023-03	RAN#99	R5-231726	2163	1	F	Addition of test case 4.5.3.5	17.6.0
2023-03	RAN#99	R5-231727	2164	1	F	Addition of test case 5.5.3.7	17.6.0
2023-03	RAN#99	R5-231728	2165	1	F	Addition of test case 6.5.3.4	17.6.0
2023-03	RAN#99	R5-231729	2166	1	F	Addition of test case 6.5.3.5	17.6.0
2023-03	RAN#99	R5-231730	2167	1	F	Addition of test case 7.5.3.4	17.6.0
2023-03	RAN#99	R5-231731	2168	1	F	Addition of test case 7.5.3.5	17.6.0
2023-03	RAN#99	R5-231732	2290	1	F	Correction of NR SA FR1 Cell reselection RedCap test case 16.1.1.1	17.6.0
2023-03	RAN#99	R5-231733	2292	1	F	Correction of NR SA FR1 Cell reselection RedCap test case 16.1.1.3	17.6.0
2023-03	RAN#99	R5-231734	2294	1	F	Correction of NR SA FR1 Cell reselection RedCap test case 16.1.1.5	17.6.0
2023-03	RAN#99	R5-231735	2296	1	F	Correction of NR SA FR1 Cell reselection RedCap test case 16.1.1.7	17.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-03	RAN#99	R5-231736	2153	1	F	Adding test case 7.5.11 for UE UL carrier RRC reconfiguration delay	17.6.0
2023-03	RAN#99	R5-231743	2311	1	F	Correction of Idle Mode inter-RAT CA/DC Measurements test case 6.6.15.1 including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231744	2313	1	F	Correction of E-UTRA - NR FR2 Early Measurement Reporting 8.2.2.2 test case including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231746	2295	1	F	Correction of NR SA FR1 Cell reselection RedCap test case 16.1.1.6 including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231747	2297	1	F	Correction of NR SA FR1 Cell reselection RedCap test case 16.1.1.8 including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231748	2314	1	F	Correction of test tolerance for CADC enhancement test cases in Annex F	17.6.0
2023-03	RAN#99	R5-231759	2183	1	F	Addition of RedCap RRM TC 16.5.1.14 - OOS DRX 2Rx with TT	17.6.0
2023-03	RAN#99	R5-231760	2291	1	F	Correction of NR SA FR1 Cell reselection RedCap test case 16.1.1.2 including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231761	2293	1	F	Correction of NR SA FR1 Cell reselection RedCap test case 16.1.1.4 including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231764	2160	1	F	Update of RRM Test Case 5.5.3.1 EN-DC FR2 SCell activation and deactivation intra-band in non-DRX including Test Tolerance	17.6.0
2023-03	RAN#99	R5-231767	2233	1	F	Introduction of CLI Measurement test case 5.6.4.2, 5.7.5.2, 7.6.4.2, 7.7.5.2, 6.6.6.1 and 6.7.8.1	17.6.0
2023-03	RAN#99	R5-231855	2155	1	F	Addition of PRS based UE Rx-Tx measurement FR1 SA test case	17.6.0
2023-03	RAN#99	R5-231856	2157	1	F	Addition of PRS based UE Rx-Tx measurement FR2 SA test case	17.6.0
2023-03	RAN#99	R5-231872	2335	1	F	Update to RRM applicability rules and test optimization - 38.533	17.6.0
2023-03	RAN#99	R5-231875	2261	1	F	Correction to NSA FR2 RLM test cases	17.6.0
2023-03	RAN#99	R5-231884	2227	1	F	Addition of RRM enh TC 6.5.8.1 - PCell CBW change with TT	17.6.0
2023-03	RAN#99	R5-231893	2156	2	F	Addition of TRS based UE Rx-Tx measurement SA FR1 test case	17.6.0
2023-03	RAN#99	R5-231896	2242	1	F	Update to HST RRM test cases	17.6.0
2023-03	RAN#99	R5-231950	2317	1	F	Correction of SA FR1 HST reselection test case 6.1.1.8	17.6.0
2023-03	RAN#99	R5-231951	2318	1	F	Correction of SA FR1 HST event triggered reporting test case 6.6.1.8	17.6.0
2023-03	RAN#99	R5-231954	2179	1	F	Addition of RedCap RRM TC 16.5.1.10 - OOS non-DRX 2Rx with TT	17.6.0
2023-03	RAN#99	R5-231955	2180	1	F	Addition of RedCap RRM TC 16.5.1.11 - IS non-DRX 1Rx	17.6.0
2023-03	RAN#99	R5-231956	2184	1	F	Addition of RedCap RRM TC 16.5.1.15 - IS DRX 1Rx	17.6.0
2023-03	RAN#99	R5-231957	2190	1	F	Addition of RedCap RRM TC 16.5.4.1 - CBW change 1Rx with TT	17.6.0
2023-03	RAN#99	R5-231958	2191	1	F	Addition of RedCap RRM TC 16.5.4.2 - CBW change 2Rx with TT	17.6.0
2023-03	RAN#99	R5-231963	2201	1	F	Addition of RedCap RRM TC 16.6.4.8 - CSI-RS L1-RSRP DRX 2Rx with TT	17.6.0
2023-03	RAN#99	R5-231976	2171	1	F	Addition of RedCap RRM TC 16.3.1.2 - intra known HO 2Rx with TT	17.6.0
2023-03	RAN#99	R5-231977	2172	1	F	Addition of RedCap RRM TC 16.3.1.3 - intra unknown HO 1Rx	17.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-03	RAN#99	R5-231978	2173	1	F	Addition of RedCap RRM TC 16.3.1.4 - intra unknown HO 2Rx with TT	17.6.0
2023-03	RAN#99	R5-231979	2174	1	F	Addition of RedCap RRM TC 16.3.1.5 - inter unknown HO 1Rx	17.6.0
2023-03	RAN#99	R5-231980	2175	1	F	Addition of RedCap RRM TC 16.3.1.6 - inter unknown HO 2Rx with TT	17.6.0
2023-03	RAN#99	R5-231981	2192	2	F	Addition of RedCap RRM TC 16.6.1.1 - gapless non-DRX 1Rx	17.6.0
2023-03	RAN#99	R5-231982	2193	2	F	Addition of RedCap RRM TC 16.6.1.2 - gapless non-DRX 2Rx with TT	17.6.0
2023-03	RAN#99	R5-231983	2196	2	F	Addition of RedCap RRM TC 16.6.1.9 - intra gapless SBI 1Rx	17.6.0
2023-03	RAN#99	R5-231984	2197	2	F	Addition of RedCap RRM TC 16.6.1.10 - intra gapless SBI 2Rx with TT	17.6.0
2023-03	RAN#99	-	-	-	-	coversheet correction	17.6.1
2023-06	RAN#100	R5-232097	2340	-	F	Addition of minimum requirements for 6.6.19.0 - FR1 NCSG	17.7.0
2023-06	RAN#100	R5-232098	2341	-	F	Addition of NCSG RRM test case 6.6.19.1	17.7.0
2023-06	RAN#100	R5-232099	2342	-	F	Addition of NCSG RRM test case 6.6.19.2	17.7.0
2023-06	RAN#100	R5-232100	2343	-	F	Addition of NCSG RRM test case 6.6.19.3	17.7.0
2023-06	RAN#100	R5-232101	2344	-	F	Addition of NCSG RRM test case 6.6.19.4	17.7.0
2023-06	RAN#100	R5-232102	2345	-	F	Correction to table E.4-1 and E.4-2 for NCSG TCs	17.7.0
2023-06	RAN#100	R5-232104	2346	-	F	Addition of minimum requirements for 6.6.17.0	17.7.0
2023-06	RAN#100	R5-232130	2349	-	F	Addition to CG-SDT RRM test case for FR2	17.7.0
2023-06	RAN#100	R5-232171	2350	-	F	Core spec alignment for RedCap TCs 16.6.1.8 and 16.6.1.12	17.7.0
2023-06	RAN#100	R5-232172	2351	-	F	Correction to Test frequencies reference for RedCap TCs in chapter 16	17.7.0
2023-06	RAN#100	R5-232174	2353	-	F	Core spec alignment for SMTC value for TC 6.1.1.1	17.7.0
2023-06	RAN#100	R5-232175	2354	-	F	Correction to Test frequencies reference for active BWP switch TCs: 4.5.6.1.1, 4.5.6.1.2, 4.5.6.2.1	17.7.0
2023-06	RAN#100	R5-232307	2369	-	F	Correction to EN-DC FR2 RLM tests for PSCell configured with CSI-RS-based RLM RS including TT	17.7.0
2023-06	RAN#100	R5-232336	2370	-	F	Update concurrent gap test cases 6.6.18.1 and 6.6.18.2	17.7.0
2023-06	RAN#100	R5-232426	2371	-	F	Correction to table E.4-1 for Pre-MG TCs	17.7.0
2023-06	RAN#100	R5-232460	2374	-	F	Correction to RedCap RRM TC 16.5.2.x SSB BFR	17.7.0
2023-06	RAN#100	R5-232461	2375	-	F	Correction to RedCap RRM TC 16.6.1.x CDSSB intraFreq	17.7.0
2023-06	RAN#100	R5-232462	2376	-	F	Correction to RedCap RRM TC 16.6.1.x NCDSSB intraFreq	17.7.0
2023-06	RAN#100	R5-232463	2377	-	F	Correction to RedCap RRM TC 17.5.1.2 SSB InSync noDRX	17.7.0
2023-06	RAN#100	R5-232467	2381	-	F	Correction to RedCap RRM TC 17.6.1.1 intraFreq noDRX	17.7.0
2023-06	RAN#100	R5-232469	2383	-	F	Correction to RedCap RRM TC 17.6.1.3 gap intraFreq noDRX with TT	17.7.0
2023-06	RAN#100	R5-232470	2384	-	F	Correction to RedCap RRM TC 17.6.1.4 gap intraFreq DRX with TT	17.7.0
2023-06	RAN#100	R5-232472	2386	-	F	Correction to RedCap RRM TC 17.6.3.2 SSB L1RSRP DRX with TT	17.7.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-06	RAN#100	R5-232473	2387	-	F	Correction to RedCap RRM TC 17.6.3.3 CSIRS L1RSRP noDRX with TT	17.7.0
2023-06	RAN#100	R5-232474	2388	-	F	Correction to RedCap RRM TC 17.6.3.4 CSIRS L1RSRP DRX with TT	17.7.0
2023-06	RAN#100	R5-232475	2389	-	F	Correction to RedCap RRM TC 18.2.2.1 L2N Redirection	17.7.0
2023-06	RAN#100	R5-232480	2394	-	F	Correction to Annex A for RedCap RRM TCs	17.7.0
2023-06	RAN#100	R5-232482	2396	-	F	Correction to Annex F for RedCap RRM TCs	17.7.0
2023-06	RAN#100	R5-232489	2397	-	F	Correction to RRM enh TC 6.5.8.1 CBW change	17.7.0
2023-06	RAN#100	R5-232491	2399	-	F	Correction to EN DC RRM TC 4.6.2.x FR1 interFreq	17.7.0
2023-06	RAN#100	R5-232492	2400	-	F	Correction to NR SA RRM TC 6.6.2.x FR1 interFreq	17.7.0
2023-06	RAN#100	R5-232494	2402	-	F	Correction to Annex H for NR RRM TCs	17.7.0
2023-06	RAN#100	R5-232530	2403	-	F	Update of eMG TC 6.6.18.3	17.7.0
2023-06	RAN#100	R5-232531	2404	-	F	Update of eMG TC 6.6.18.4	17.7.0
2023-06	RAN#100	R5-232532	2405	-	F	Update of E.4 for MG enhancements	17.7.0
2023-06	RAN#100	R5-232533	2406	-	F	Update of H.3.1 for MG enhancements	17.7.0
2023-06	RAN#100	R5-232916	2426	-	F	Correction of EN-DC event reporting with highSpeedMeasCA-Scell-r17 test case 4.6.1.8 including Test Tolerance	17.7.0
2023-06	RAN#100	R5-232917	2427	-	F	Correction of EN-DC event reporting with highSpeedMeasCA-Scell-r17 test case 4.6.2.9 including Test Tolerance	17.7.0
2023-06	RAN#100	R5-232918	2428	-	F	Correction of SA FR1 HST reselection test case 6.1.1.8 including Test Tolerance	17.7.0
2023-06	RAN#100	R5-232920	2430	-	F	Correction of SA event reporting with highSpeedMeasCA-Scell-r17 test case 6.6.2.12 including Test Tolerance	17.7.0
2023-06	RAN#100	R5-232921	2431	-	F	Correction of Annex F for HST test cases including Test Tolerance	17.7.0
2023-06	RAN#100	R5-232923	2433	-	F	Correction of RedCap test case 17.1.1.1	17.7.0
2023-06	RAN#100	R5-232924	2434	-	F	Correction of RedCap test case 17.1.1.2	17.7.0
2023-06	RAN#100	R5-232925	2435	-	F	Correction of RedCap test case 17.1.1.3	17.7.0
2023-06	RAN#100	R5-232926	2436	-	F	Correction of RedCap test case 17.1.1.4	17.7.0
2023-06	RAN#100	R5-232982	2439	-	F	Correction to CSI RS based L1-RSRP measurement test 5.6.3.4	17.7.0
2023-06	RAN#100	R5-233011	2440	-	F	Correction to message exception in FR1 BWP Switching test cases	17.7.0
2023-06	RAN#100	R5-233012	2441	-	F	Correction to ssb-ToMeasure setting in 5.6.1.1 and 5.6.1.3	17.7.0
2023-06	RAN#100	R5-233013	2442	-	F	Correction to CellGroupConfig in 5.5.6.2.1	17.7.0
2023-06	RAN#100	R5-233015	2444	-	F	Correction to entries of FR2 RLM config in Annex H	17.7.0
2023-06	RAN#100	R5-233019	2447	-	F	Corrections to RRM HST 6.1.1.7 test case	17.7.0
2023-06	RAN#100	R5-233020	2448	-	F	Introduction of 6.5.1.9 power saving enhancement test case	17.7.0
2023-06	RAN#100	R5-233134	2449	-	F	Correction in RRM TC 4.5.2.5 TC Procedure	17.7.0
2023-06	RAN#100	R5-233136	2450	-	F	Removal of duplicated table in A.1.4.2-3	17.7.0
2023-06	RAN#100	R5-233137	2451	-	F	Core spec alignment for TC 5.5.1.7	17.7.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-06	RAN#100	R5-233140	2454	-	F	PDCCH Config correction for FR2 beam failure detection and link recovery TCs	17.7.0
2023-06	RAN#100	R5-233298	2461	-	F	Addition of NR SA FR2 BFD and LR TT for RedCap	17.7.0
2023-06	RAN#100	R5-233507	2367	1	F	Addition of MAC-CE based active TCI state switch test case for HST FR2	17.7.0
2023-06	RAN#100	R5-233604	2359	1	F	Completion of SA FR2 direct SCell activation at handover test case	17.7.0
2023-06	RAN#100	R5-233605	2361	1	F	Completion of SA FR2 direct SCell activation test case	17.7.0
2023-06	RAN#100	R5-233606	2362	1	F	Completion of ENDC FR2 direct SCell activation test case	17.7.0
2023-06	RAN#100	R5-233607	2366	1	F	Addition of UE Rx-Tx time difference measurement for propagation delay compensation using TRS in FR2 test case	17.7.0
2023-06	RAN#100	R5-233608	2339	1	F	Addition of Pre-MG RRM test case 6.6.17.2	17.7.0
2023-06	RAN#100	R5-233609	2338	1	F	Addition of Pre-MG RRM test case 6.6.17.1	17.7.0
2023-06	RAN#100	R5-233610	2352	1	F	Core spec alignment for SMTC value for RedCap TC 16.1.1.1	17.7.0
2023-06	RAN#100	R5-233611	2395	1	F	Correction to Annex E for RedCap RRM TCs	17.7.0
2023-06	RAN#100	R5-233612	2415	1	F	Addition of RedCap RLM OOS test cases 16.5.1.5 and 16.5.1.6	17.7.0
2023-06	RAN#100	R5-233613	2416	1	F	Addition of RedCap SSB-based BFD and LR in DRX mode test cases 16.5.2.3 and 16.5.2.4	17.7.0
2023-06	RAN#100	R5-233614	2417	1	F	Addition of RedCap DCI-based DL active BWP switch test cases 16.5.3.1.1 and 16.5.3.1.2	17.7.0
2023-06	RAN#100	R5-233615	2418	1	F	Addition of RedCap RRC-based DL active BWP switch test cases 16.5.3.2.1 and 16.5.3.2.2	17.7.0
2023-06	RAN#100	R5-233616	2432	1	F	Correction of RedCap NR SA FR1 - E-UTRA Cell reselection test cases in clause 16.1.2	17.7.0
2023-06	RAN#100	R5-233617	2437	1	F	Annex E correction for Redcap FR2 reselection cases	17.7.0
2023-06	RAN#100	R5-233618	2348	1	F	Adding test case 7.5.3.3 for SCell Activation and deactivation for SCell in FR2 inter-band in non-DRX	17.7.0
2023-06	RAN#100	R5-233619	2419	1	F	Addition of power savings RLM OOS test case 4.5.1.9	17.7.0
2023-06	RAN#100	R5-233620	2420	1	F	Addition of power savings RLM OOS test case 5.5.1.10	17.7.0
2023-06	RAN#100	R5-233621	2411	1	F	Addition of NR-U EN-DC SS-RSRP measurement performance test cases	17.7.0
2023-06	RAN#100	R5-233622	2412	1	F	Update to NR-U frequency bands	17.7.0
2023-06	RAN#100	R5-233623	2413	1	F	Addition of NR-U SA SS-RSRP measurement performance test cases	17.7.0
2023-06	RAN#100	R5-233624	2355	1	F	Clarification to test procedure for EN-DC active BWP switch TCs: 4.5.6.1.1, 4.5.6.1.2, 4.5.6.2.1	17.7.0
2023-06	RAN#100	R5-233625	2423	1	F	Update to SCell activation and deactivation test cases	17.7.0
2023-06	RAN#100	R5-233626	2455	1	F	T3 correction of SSB_RP for TC 5.5.5.1	17.7.0
2023-06	RAN#100	R5-233627	2443	1	F	Editorial correction to reference of AoA setup	17.7.0
2023-06	RAN#100	R5-233628	2459	1	F	Update of RRM Test Case 5.5.3.1 EN-DC FR2 SCell activation and deactivation intra-band in non-DRX	17.7.0
2023-06	RAN#100	R5-233629	2356	1	F	Clarification to test procedure for SA active BWP switch TCs: 6.5.6.1.1, 6.5.6.1.2, 6.5.6.2.1	17.7.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-06	RAN#100	R5-233630	2424	1	F	Correction to test applicability for SA FR2 test cases	17.7.0
2023-06	RAN#100	R5-233645	2410	1	F	Addition of NR SA FR2 active TCI state switch test cases 7.5.8.1.1 and 7.5.8.2.1 with TT	17.7.0
2023-06	RAN#100	R5-233647	2385	1	F	Correction to RedCap RRM TC 17.6.3.1 SSB L1RSRP noDRX with TT	17.7.0
2023-06	RAN#100	R5-233648	2408	1	F	Update to CLI tests 4.6.5.1 and 6.6.6.1 with TTs	17.7.0
2023-06	RAN#100	R5-233649	2409	1	F	Update to CLI tests 4.7.6.1 and 6.7.8.1 with TTs	17.7.0
2023-06	RAN#100	R5-233650	2422	1	F	Annex E and F updates for CLI-based test cases including TTs	17.7.0
2023-06	RAN#100	R5-233654	2378	1	F	Correction to RedCap RRM TC 17.5.2.3 CSIRS BFR noDRX with TT	17.7.0
2023-06	RAN#100	R5-233655	2379	1	F	Correction to RedCap RRM TC 17.5.2.4 CSIRS BFR DRX with TT	17.7.0
2023-06	RAN#100	R5-233656	2380	1	F	Correction to RedCap RRM TC 17.5.2.5 BFR restriction with TT	17.7.0
2023-06	RAN#100	R5-233657	2382	1	F	Addition of RedCap RRM TC 17.6.1.2 intraFreq DRX with TT	17.7.0
2023-06	RAN#100	R5-233658	2429	1	F	Correction of SA event reporting with highSpeedMeasCA-Scell-r17 test case 6.6.1.8 including Test Tolerance	17.7.0
2023-06	RAN#100	R5-233660	2363	1	F	Update to PRS based UE Rx-Tx measurement FR1 SA test case	17.7.0
2023-06	RAN#100	R5-233661	2364	1	F	Update to PRS based UE Rx-Tx measurement FR2 SA test case	17.7.0
2023-06	RAN#100	R5-233662	2365	1	F	Update to TRS based UE Rx-Tx measurement FR1 SA test case	17.7.0
2023-06	RAN#100	R5-233663	2347	1	F	UE UL carrier RRC reconfiguration delay test tolerances for FR2	17.7.0
2023-06	RAN#100	R5-233665	2368	1	F	Correction to FR2 BFD and LR including TT	17.7.0
2023-06	RAN#100	R5-233666	2460	1	F	Correction to FR2 BFD and LR	17.7.0
2023-06	RAN#100	R5-233667	2421	1	F	TT update for test cases 6.6.3.1 and 6.6.3.2	17.7.0
2023-06	RAN#100	R5-233729	2452	1	F	Core spec alignment for antenna configuration for 4.5.3 TCs	17.7.0
2023-06	RAN#100	R5-233730	2453	1	F	Core spec alignment for antenna configuration for 6.5.3 TCs	17.7.0
2023-06	RAN#100	R5-233739	2456	1	F	Update to FR1 CG-SDT test case	17.7.0
2023-06	RAN#100	R5-233740	2414	1	F	Update to RRM idle mode HST test cases	17.7.0
2023-06	RAN#100	R5-233741	2457	1	F	Correction for multi-TRP test case 7.5.5.9	17.7.0
2023-06	RAN#100	R5-233742	2458	1	F	Update to L2N latency test cases	17.7.0
2023-06	RAN#100	R5-233747	2357	1	F	Completion of EN-DC FR1 direct SCell activation test case	17.7.0
2023-06	RAN#100	R5-233748	2358	1	F	Completion of SA FR1 direct SCell activation test case	17.7.0
2023-06	RAN#100	R5-233749	2360	1	F	Completion SA FR1 direct SCell activation at handover test case	17.7.0
2023-06	RAN#100	R5-233752	2390	1	F	Correction to RedCap RRM TC 18.3.1.5 interRAT noDRX with TT	17.7.0
2023-06	RAN#100	R5-233753	2391	1	F	Correction to RedCap RRM TC 18.3.1.6 interRAT DRX with TT	17.7.0
2023-06	RAN#100	R5-233754	2392	1	F	Correction to RedCap RRM TC 18.3.1.7 interRAT noDRX SBI with TT	17.7.0
2023-06	RAN#100	R5-233755	2393	1	F	Correction to RedCap RRM TC 18.3.1.8 interRAT DRX SBI with TT	17.7.0
2023-06	RAN#100	R5-233771	2373	1	F	Correction to RedCap RRM TC 16.3.1.x NCDSSB HO	17.7.0
2023-06	RAN#100	R5-233773	2398	1	F	Correction to Annex A for RRM enh TCs	17.7.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-06	RAN#100	R5-233775	2401	2	F	Correction to NR SA RRM TC 8.4.2.x FR2 interRAT	17.7.0
2023-09	RAN#101	R5-233889	2467	-	F	Update CORESET RMC in Annex for Redcap TC 16.5.3.2.1 and 16.5.3.2.2 with core spec alignment	17.8.0
2023-09	RAN#101	R5-233891	2468	-	F	Correction of 6.6.19.1 NCSG test case with Test Tolerance	17.8.0
2023-09	RAN#101	R5-233892	2469	-	F	Correction of 6.6.19.2 NCSG test case with Test Tolerance	17.8.0
2023-09	RAN#101	R5-233894	2471	-	F	Correction of 6.6.19.4 NCSG test case with Test Tolerance	17.8.0
2023-09	RAN#101	R5-233967	2472	-	F	Adding TTs into 7.5.3.3 - SCell Activation and deactivation for SCell in FR2 inter-band in non-DRX	17.8.0
2023-09	RAN#101	R5-233999	2476	-	F	Correction of Redcap test case 16.6.1.3, 16.6.1.4, 16.6.1.7 and 16.6.1.8	17.8.0
2023-09	RAN#101	R5-234000	2477	-	F	Correction of Redcap test case 16.1.2.1, 16.1.2.2, 16.1.2.3 and 16.1.2.4	17.8.0
2023-09	RAN#101	R5-234086	2481	-	F	Correction of test step number and reference for RRM Test Case	17.8.0
2023-09	RAN#101	R5-234331	2482	-	F	Correction in minimum conformance requirements for intra-frequency cell re-selection to handle HST FR2	17.8.0
2023-09	RAN#101	R5-234332	2483	-	F	Addition of intra-frequency cell re-selection NR FR2 test case for UE power class 6	17.8.0
2023-09	RAN#101	R5-234337	2486	-	F	Completion of propagation delay compensation FR1 SA test cases	17.8.0
2023-09	RAN#101	R5-234338	2487	-	F	Completion of propagation delay compensation FR2 SA test cases	17.8.0
2023-09	RAN#101	R5-234356	2497	-	F	Addition of 16.6.7.1 test case: NR SA FR1 intra-frequency CGI identification of NR neighbour cell in FR1 for 1 Rx UE	17.8.0
2023-09	RAN#101	R5-234357	2498	-	F	Addition of 16.6.7.2 test case: NR SA FR1 intra-frequency CGI identification of NR neighbour cell in FR1 for 2 Rx UE	17.8.0
2023-09	RAN#101	R5-234367	2507	-	F	Cell configuration mapping for the MRDC and CPAC test case	17.8.0
2023-09	RAN#101	R5-234385	2508	-	F	Correction to FR2 RLM tests for PSCell configured with SSB-based RLM RS including TT	17.8.0
2023-09	RAN#101	R5-234386	2509	-	F	Correction to TC 17.5.1.2 RedCap NR SA FR2 RLM including TT	17.8.0
2023-09	RAN#101	R5-234388	2510	-	F	Correction to 5.5.1.6 EN-DC FR2 RLM test for PSCell configured with CSI-RS-based RLM RS including TT	17.8.0
2023-09	RAN#101	R5-234397	2514	-	F	Correction to RedCap RRM TC 16.3.1.1_intra freq HO known 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234398	2515	-	F	Correction to RedCap RRM TC 16.3.1.3_intra freq HO unknown 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234399	2516	-	F	Correction to RedCap RRM TC 16.3.1.4_intra freq HO unknown 2Rx	17.8.0
2023-09	RAN#101	R5-234400	2517	-	F	Correction to RedCap RRM TC 16.3.1.5_inter freq HO unknown 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234401	2518	-	F	Correction to RedCap RRM TC 16.5.1.1_SSB OOS no DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234402	2519	-	F	Correction to RedCap RRM TC 16.5.1.3_SSB IS no DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234404	2521	-	F	Correction to RedCap RRM TC 16.5.1.7_SSB IS DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234405	2522	-	F	Correction to RedCap RRM TC 16.5.1.9_CSIRS OOS no DRX 1Rx with TT	17.8.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-09	RAN#101	R5-234406	2523	-	F	Correction to RedCap RRM TC 16.5.1.11_CSIRS IS no DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234407	2524	-	F	Correction to RedCap RRM TC 16.5.1.13_CSIRS OOS DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234408	2525	-	F	Correction to RedCap RRM TC 16.5.1.15_CSIRS IS DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234409	2526	-	F	Correction to RedCap RRM TC 16.6.1.1_no gap no DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234410	2527	-	F	Correction to RedCap RRM TC 16.6.1.3_no gap DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234411	2528	-	F	Correction to RedCap RRM TC 16.6.1.5_gap no DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234412	2529	-	F	Correction to RedCap RRM TC 16.6.1.7_gap DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234413	2530	-	F	Correction to RedCap RRM TC 16.6.1.9_no gap no DRX SBI 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234414	2531	-	F	Correction to RedCap RRM TC 16.6.1.11_no gap DRX SBI 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234415	2532	-	F	Correction to RedCap RRM TC 16.6.4.1_SSB L1 RSRP no DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234416	2533	-	F	Correction to RedCap RRM TC 16.6.4.3_SSB L1 RSRP DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234417	2534	-	F	Correction to RedCap RRM TC 16.6.4.5_CSIRS L1 RSRP no DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234418	2535	-	F	Correction to RedCap RRM TC 16.6.4.7_CSIRS L1 RSRP DRX 1Rx with TT	17.8.0
2023-09	RAN#101	R5-234428	2537	-	F	Addition of RRM enh TC 4.5.6.3.1 - EN DC dual DCI BWP switch	17.8.0
2023-09	RAN#101	R5-234429	2538	-	F	Addition of RRM enh TC 4.5.6.5.1 - EN DC dual RRC BWP switch	17.8.0
2023-09	RAN#101	R5-234430	2539	-	F	Addition of RRM enh TC 6.5.6.3.1 - NR SA dual DCI BWP switch	17.8.0
2023-09	RAN#101	R5-234431	2540	-	F	Addition of RRM enh TC 6.5.6.5.1 - NR SA dual RRC BWP switch	17.8.0
2023-09	RAN#101	R5-234432	2541	-	F	Correction to Annex E for RRM enh TCs	17.8.0
2023-09	RAN#101	R5-234436	2544	-	F	Correction to NR SA RRM TC 6.7.1.2.1_RSRP absolute accuracy	17.8.0
2023-09	RAN#101	R5-234437	2545	-	F	Correction to FR2 NR inter-RAT measurement TCs 8.4.2.X	17.8.0
2023-09	RAN#101	R5-234440	2547	-	F	Correction to power saving RRM TCs 6.1.1.x_relaxed measurements	17.8.0
2023-09	RAN#101	R5-234646	2548	-	F	Addition of NTN intra-frequency measurement test cases	17.8.0
2023-09	RAN#101	R5-234647	2549	-	F	Addition of NTN general sections	17.8.0
2023-09	RAN#101	R5-234650	2550	-	F	Update for test case 4.5.1.9 including TT	17.8.0
2023-09	RAN#101	R5-234652	2551	-	F	Update for test case 5.5.1.10 including TT	17.8.0
2023-09	RAN#101	R5-234653	2552	-	F	Addition of NR-U general sections	17.8.0
2023-09	RAN#101	R5-234654	2553	-	F	Addition of NR-U interruption test case	17.8.0
2023-09	RAN#101	R5-234655	2554	-	F	Addition of NR-U SCell activation and deactivation test cases	17.8.0
2023-09	RAN#101	R5-234656	2555	-	F	Addition of NR-U SS-RSRQ measurement accuracy test cases	17.8.0
2023-09	RAN#101	R5-234657	2556	-	F	Addition of NR-U SS-SINR measurement accuracy test cases	17.8.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-09	RAN#101	R5-234658	2557	-	F	Update to NR-U test cases	17.8.0
2023-09	RAN#101	R5-234659	2558	-	F	Update to NR-U annexes E and H	17.8.0
2023-09	RAN#101	R5-234662	2559	-	F	Annex E and F updates for Redcap RLM, BFR and BWP switch test cases	17.8.0
2023-09	RAN#101	R5-234664	2560	-	F	Update to Redcap RLM, BFR and BWP switch tests including TTs	17.8.0
2023-09	RAN#101	R5-234671	2561	-	F	Update to TT analysis for L2N RedCap latency test cases 18.3.1.x	17.8.0
2023-09	RAN#101	R5-234677	2564	-	F	Addition of TT analysis for TCI state switch test cases 7.5.8.1.1 and 7.5.8.2.1	17.8.0
2023-09	RAN#101	R5-234681	2566	-	F	Update to TT analysis for L2N latency test cases 8.4.2.x	17.8.0
2023-09	RAN#101	R5-234682	2567	-	F	Addition of CSI-RS based RLM SA FR2 Test Cases	17.8.0
2023-09	RAN#101	R5-234776	2571	-	F	Test tolerances and measurement uncertainty for DL interruptions testcases 6.5.7A.2 and 6.5.7B.2	17.8.0
2023-09	RAN#101	R5-234807	2572	-	F	Addition of minimum requirements for Fast SCell Activation	17.8.0
2023-09	RAN#101	R5-234808	2573	-	F	Addition of minimum requirements for Conditional PSCell addition	17.8.0
2023-09	RAN#101	R5-234810	2575	-	F	Addition of new test case 7.5.3.14 for Fast SCell Activation	17.8.0
2023-09	RAN#101	R5-234811	2576	-	F	Addition of new test case 7.5.12.1 for Conditional PSCell addition	17.8.0
2023-09	RAN#101	R5-234812	2577	-	F	Addition of new test case 7.5.15.1 for SCG activation and deactivation	17.8.0
2023-09	RAN#101	R5-234813	2578	-	F	Addition of CSI-RS configuration for Fast SCell activation	17.8.0
2023-09	RAN#101	R5-234855	2580	-	F	Addition of 5.5.11.1 new test case for unified joint TCI activation	17.8.0
2023-09	RAN#101	R5-234856	2581	-	F	Addition of 5.5.11.2 new test case for unified UL TCI activation	17.8.0
2023-09	RAN#101	R5-234857	2582	-	F	Addition of 5.5.11.3 new test case for unified DL TCI activation	17.8.0
2023-09	RAN#101	R5-234858	2583	-	F	Addition of 7.5.13.1 new test case for unified joint TCI activation	17.8.0
2023-09	RAN#101	R5-234859	2584	-	F	Addition of 7.5.13.2 new test case for unified UL TCI activation	17.8.0
2023-09	RAN#101	R5-234860	2585	-	F	Addition of 7.5.13.3 new test case for unified DL TCI activation	17.8.0
2023-09	RAN#101	R5-234919	2591	-	F	Correction to Cell 2 PCI for next iteration in 16.1.1.1	17.8.0
2023-09	RAN#101	R5-234921	2593	-	F	Correction to test requirements in RedCap Cell reselection test cases	17.8.0
2023-09	RAN#101	R5-234924	2596	-	F	Correction to RedCap Event triggered measurement test cases	17.8.0
2023-09	RAN#101	R5-234977	2608	-	F	Addition of cell configuration mapping for interruptions at SRS carrier based switching test cases to Annex E	17.8.0
2023-09	RAN#101	R5-234992	2623	-	F	Addition of NR Event triggered reporting test case 16.6.2.9 for RedCap UE	17.8.0
2023-09	RAN#101	R5-234995	2626	-	F	Addition of NR Event triggered reporting test case 16.6.2.12 for RedCap UE	17.8.0
2023-09	RAN#101	R5-234997	2628	-	F	Addition of cell configuration mapping for event triggered measurement RedCap test cases to Annex E	17.8.0
2023-09	RAN#101	R5-235107	2646	-	F	TC 4.6.1.2 alignment with SA FR1 test case on DRX configuration	17.8.0
2023-09	RAN#101	R5-235108	2647	-	F	Correction in 5.5.1.5 and 5.5.1.6	17.8.0
2023-09	RAN#101	R5-235110	2648	-	F	Correction in 5.5.1.7 and 5.5.1.8	17.8.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-09	RAN#101	R5-235117	2652	-	F	Correction in 8.4.2.8	17.8.0
2023-09	RAN#101	R5-235166	2654	-	F	Addition of clause 5.5.9.0 minimum conformance requirements for uplink spatial relation switch delay	17.8.0
2023-09	RAN#101	R5-235167	2655	-	F	Addition of EN-DC PSCell FR2 uplink spatial relation switch for a known spatial relation test case 5.5.9.1.1	17.8.0
2023-09	RAN#101	R5-235168	2656	-	F	Addition of EN-DC PSCell FR2 uplink spatial relation switch associated with a known DL-RS test case 5.5.9.2.1	17.8.0
2023-09	RAN#101	R5-235170	2658	-	F	Addition of NR PCell FR2 uplink spatial relation switch with known DL-RS test case 7.5.9.1.1	17.8.0
2023-09	RAN#101	R5-235171	2659	-	F	Addition of NR PCell FR2 uplink spatial relation switch with known DL-RS test case 7.5.9.2.1	17.8.0
2023-09	RAN#101	R5-235172	2660	-	F	Addition of test cases 5.5.9.1.1 and 5.5.9.2.1 to Table E.3-1, and test cases 7.5.9.1.1 and 7.5.9.2.1 to Table E.5-1	17.8.0
2023-09	RAN#101	R5-235463	2602	1	F	Correction of interruptions at NR SRS carrier based switching test case 4.5.2.8	17.8.0
2023-09	RAN#101	R5-235464	2603	1	F	Correction of interruptions at E-UTRA SRS carrier based switching test case 4.5.2.9	17.8.0
2023-09	RAN#101	R5-235465	2568	2	F	Update to gap-based measurement reporting tests	17.8.0
2023-09	RAN#101	R5-235466	2600	1	F	Correction to BWP Switch Delay test cases	17.8.0
2023-09	RAN#101	R5-235695	2466	1	F	Correction of RedCap test case 16.6.1.7 and 16.6.1.11	17.8.0
2023-09	RAN#101	R5-235696	2562	1	F	Update to stationary measurement idle mode RedCap tests	17.8.0
2023-09	RAN#101	R5-235697	2627	1	F	Correction of the conditions for 1Rx RedCap UE	17.8.0
2023-09	RAN#101	R5-235698	2631	1	F	Removal of redundant Note 4 in 16.6.4.2	17.8.0
2023-09	RAN#101	R5-235699	2633	1	F	Alignment of Annex E14 to Test procedure for RedCap Redirection TCs	17.8.0
2023-09	RAN#101	R5-235700	2638	1	F	Corrections to RedCap RA TCs 16.3.2.2.2 and 16.3.2.2.4	17.8.0
2023-09	RAN#101	R5-235701	2639	1	F	Typos corrections for RedCap TCs	17.8.0
2023-09	RAN#101	R5-235702	2645	1	F	Core Spec alignment for RedCap RLM Tcs	17.8.0
2023-09	RAN#101	R5-235703	2499	1	F	Addition of NR SA FR2 SSB based Inter-cell L1-RSRP measurement in non-DRX test case	17.8.0
2023-09	RAN#101	R5-235704	2579	1	F	Addition of minimum requirement for unified TCI state switch delay	17.8.0
2023-09	RAN#101	R5-235705	2586	1	F	Update to Annex for feMIMO	17.8.0
2023-09	RAN#101	R5-235706	2495	1	F	Addition of DL interruptions at switching between two uplink bands with two transmit antenna connectors for 6.5.7C.1	17.8.0
2023-09	RAN#101	R5-235707	2484	1	F	Corrections in MAC-CE based active TCI state switch test case for HST FR2	17.8.0
2023-09	RAN#101	R5-235708	2485	1	F	Handle of PC6 devices via HighSpeedMeasFlagFR2-r17 signalling for 7.4.1.1	17.8.0
2023-09	RAN#101	R5-235709	2478	1	F	Addition of new test case 4.5.2.10 EN-DC FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell	17.8.0
2023-09	RAN#101	R5-235710	2479	1	F	Addition of new test case 4.5.10.1 EN-DC FR1 PSCell activation and deactivation delay	17.8.0
2023-09	RAN#101	R5-235711	2480	1	F	Addition of new test case 5.5.12.1 EN-DC FR2 PSCell activation and deactivation delay	17.8.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-09	RAN#101	R5-235712	2574	1	F	Addition of new test case 5.5.13.1 for Conditional PSCell addition	17.8.0
2023-09	RAN#101	R5-235713	2542	1	F	Editorial correction to NR RRM TCs	17.8.0
2023-09	RAN#101	R5-235714	2569	1	F	Update to Random Access applicability	17.8.0
2023-09	RAN#101	R5-235715	2635	1	F	Typo correction for 4.5.2.6 Test purpose	17.8.0
2023-09	RAN#101	R5-235716	2643	1	F	Editorial changes to correct formatting	17.8.0
2023-09	RAN#101	R5-235717	2651	1	F	Correction to firstActiveDownlinkBWP-Id for non-contention based RA TCs	17.8.0
2023-09	RAN#101	R5-235718	2632	1	F	Removal of inexistent Config IDs 6.6.4.x	17.8.0
2023-09	RAN#101	R5-235719	2642	1	F	Core Spec alignment for Table 6.6.3.3.5-1	17.8.0
2023-09	RAN#101	R5-235720	2492	1	F	Correction in DCCA test case titles	17.8.0
2023-09	RAN#101	R5-235721	2634	1	F	Alignment of Annex E Cell configuration mapping to Test procedure for TC 6.3.2.3.1	17.8.0
2023-09	RAN#101	R5-235722	2563	1	F	Update to RRM tests with testability issues	17.8.0
2023-09	RAN#101	R5-235723	2661	1	F	Addition of test cases 5.5.9.1.1 and 5.5.9.2.1 to Table F.1.3.2-3	17.8.0
2023-09	RAN#101	R5-235724	2536	1	F	Correction to Annex F for RedCap RRM TCs	17.8.0
2023-09	RAN#101	R5-235725	2609	1	F	Correction of NR SA FR1 Cell reselection RedCap test case 16.1.1.3 including test tolerance	17.8.0
2023-09	RAN#101	R5-235727	2611	1	F	Correction of NR SA FR1 Cell reselection RedCap test case 16.1.1.7 including test tolerance	17.8.0
2023-09	RAN#101	R5-235728	2612	1	F	Correction of NR SA FR1 - E-UTRA Cell reselection RedCap test case 16.1.2.1 including test tolerance	17.8.0
2023-09	RAN#101	R5-235729	2613	1	F	Correction of NR SA FR1- E-UTRA Cell reselection RedCap test case 16.1.2.3 including test tolerance	17.8.0
2023-09	RAN#101	R5-235733	2649	1	F	Introduction of 5.5.5.9 power saving enhancement test case	17.8.0
2023-09	RAN#101	R5-235734	2650	1	F	Update on 6.5.1.9	17.8.0
2023-09	RAN#101	R5-235735	2662	1	F	Addition of test cases 7.5.9.1.1 and 7.5.9.2.1 to Table F.1.3.2-4	17.8.0
2023-09	RAN#101	R5-235738	2463	1	F	Correction to 6.6.17.2 for editor's note, confirm TT=0, RRC msg content	17.8.0
2023-09	RAN#101	R5-235739	2465	1	F	Update Annex F for gap enhancement test cases 6.6.18.1 and 6.6.18.2 including TTs	17.8.0
2023-09	RAN#101	R5-235741	2543	1	F	Correction to FR1 L1 RSRP relative accuracy TCs with TT	17.8.0
2023-09	RAN#101	R5-235742	2546	1	F	Correction to Annex F for FR1 L1 RSRP relative accuracy TCs	17.8.0
2023-09	RAN#101	R5-235744	2462	1	F	Correction to 6.6.17.1 for editor's note, confirm TT=0, update Annex F for pre-MG TCs	17.8.0
2023-09	RAN#101	R5-235745	2464	1	F	Update concurrent gap test cases 6.6.18.1 and 6.6.18.2	17.8.0
2023-09	RAN#101	R5-235840	2657	1	F	Addition of clause 7.5.9.0 minimum conformance requirements for uplink spatial relation switch delay	17.8.0
2023-09	RAN#101	R5-235881	2475	1	F	Core spec alignment for Redcap test case 16.5.1.5, 16.5.1.6, 16.5.2.3, 16.5.3.2.1 and 16.5.3.2.2	17.8.0
2023-09	RAN#101	R5-235882	2592	1	F	Removal of square brackets from test parameters of RedCap test cases	17.8.0
2023-09	RAN#101	R5-235883	2597	1	F	Correction to CORESET RMC settings in 16.6.1.8	17.8.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-09	RAN#101	R5-235884	2614	1	F	Correction of NR SA FR1- E-UTRA Cell reselection RedCap test case 16.1.2.5 including test tolerance	17.8.0
2023-09	RAN#101	R5-235885	2615	1	F	Addition of NR Event triggered reporting test case 16.6.2.1 for RedCap UE	17.8.0
2023-09	RAN#101	R5-235886	2616	1	F	Addition of NR Event triggered reporting test case 16.6.2.2 for RedCap UE	17.8.0
2023-09	RAN#101	R5-235887	2617	1	F	Addition of NR Event triggered reporting test case 16.6.2.3 for RedCap UE	17.8.0
2023-09	RAN#101	R5-235888	2618	1	F	Addition of NR Event triggered reporting test case 16.6.2.4 for RedCap UE	17.8.0
2023-09	RAN#101	R5-235889	2621	1	F	Addition of NR Event triggered reporting test case 16.6.2.7 for RedCap UE	17.8.0
2023-09	RAN#101	R5-235890	2622	1	F	Addition of NR Event triggered reporting test case 16.6.2.8 for RedCap UE	17.8.0
2023-09	RAN#101	R5-235891	2624	1	F	Addition of NR Event triggered reporting test case 16.6.2.10 for RedCap UE	17.8.0
2023-09	RAN#101	R5-235892	2625	1	F	Addition of NR Event triggered reporting test case 16.6.2.11 for RedCap UE	17.8.0
2023-09	RAN#101	R5-235894	2653	1	F	Update in Redcap Radio Link Monitoring In-sync Test in DRX mode for 2 Rx	17.8.0
2023-09	RAN#101	R5-235895	2473	1	F	Modification to CG-SDT RRM test case for FR2	17.8.0
2023-09	RAN#101	R5-235896	2587	1	F	TT update for test cases 4.5.5.7& 4.5.5.8	17.8.0
2023-09	RAN#101	R5-235897	2588	1	F	TT update for test cases 5.5.5.8	17.8.0
2023-09	RAN#101	R5-235898	2589	1	F	TT update for test cases 6.5.5.7	17.8.0
2023-09	RAN#101	R5-235899	2590	1	F	TT update for test cases 7.5.5.9& 7.5.5.10	17.8.0
2023-09	RAN#101	R5-235900	2604	1	F	Correction of interruptions at E-UTRA SRS carrier based switching test case 5.5.2.7	17.8.0
2023-09	RAN#101	R5-235901	2605	1	F	Correction of interruptions at NR SRS carrier based switching test case 5.5.2.5	17.8.0
2023-09	RAN#101	R5-235902	2606	1	F	Correction of interruptions at NR SRS carrier based switching test case 6.5.2.2	17.8.0
2023-09	RAN#101	R5-235903	2607	1	F	Addition of SRS configuration for carrier based switching test cases to Annex A	17.8.0
2023-09	RAN#101	R5-235904	2493	1	F	Addition of NR SA FR1 DL interruptions at switching between two uplink carriers for 6.5.7A.2	17.8.0
2023-09	RAN#101	R5-235905	2494	1	F	Addition of NR SA FR1 DL interruptions at switching between two uplink bands for 6.5.7B.2	17.8.0
2023-09	RAN#101	R5-235906	2496	1	F	Addition of DL interruptions at switching between two uplink bands with two transmit antenna connectors for 6.5.7C.2	17.8.0
2023-09	RAN#101	R5-235907	2470	1	F	Correction of 6.6.19.3 NCSG test case with Test Tolerance	17.8.0
2023-09	RAN#101	R5-235908	2500	1	F	Addition of EN-DC FR1 test case for the addition and release delay of PSCell	17.8.0
2023-09	RAN#101	R5-235909	2501	1	F	Addition of EN-DC FR1 fast SCell activation test case for 160 ms SCell measurement cycle	17.8.0
2023-09	RAN#101	R5-235910	2502	1	F	Addition of EN-DC FR1 fast SCell activation test case for 640 ms SCell measurement cycle	17.8.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-09	RAN#101	R5-235911	2503	1	F	Addition of EN-DC FR2 fast SCell in intra-band activation test case	17.8.0
2023-09	RAN#101	R5-235912	2504	1	F	Addition of NR SA FR1 fast SCell activation test case for 160 ms SCell measurement cycle	17.8.0
2023-09	RAN#101	R5-235913	2505	1	F	Addition of NR SA FR1 fast SCell activation test case for 640 ms SCell measurement cycle	17.8.0
2023-09	RAN#101	R5-235914	2506	1	F	Addition of NR SA FR2 fast SCell in intra-band activation test case	17.8.0
2023-09	RAN#101	R5-235916	2488	1	F	TT analysis of NR SA FR1 direct SCell activation at handover test case	17.8.0
2023-09	RAN#101	R5-235917	2489	1	F	TT analysis of NR SA FR2 direct SCell activation test case	17.8.0
2023-09	RAN#101	R5-235918	2490	1	F	TT analysis of NR SA FR2 direct SCell activation at handover test case	17.8.0
2023-09	RAN#101	R5-235919	2491	1	F	Measurement uncertainty and test tolerance updation of direct SCell activation test cases	17.8.0
2023-09	RAN#101	R5-235946	2601	1	F	Correction to csi-SSB-ResourceToAddModList for SSB-based CSI-Reporting test cases	17.8.0
2023-09	RAN#101	R5-235948	2565	1	F	Update to FR2 RLM test cases	17.8.0
2023-09	RAN#101	R5-235963	2630	1	F	Correction of Redcap test case 16.4.1.1, 16.4.1.2, 16.4.3.1, 16.4.3.2, 16.5.3.1.1 and 16.5.3.1.2	17.8.0
2023-09	RAN#101	R5-235964	2629	2	F	Test tolerance correction in Annex F for 1Rx RedCap test cases	17.8.0
2023-09	RAN#101	-	-	-	-	Administrative release upgrade to match the release of 3GPP TS 38.522 which was upgraded at RAN#101 to Rel-18 due to Rel-18 relevant CR(s)	18.0.0
2023-12	RAN#102	R5-236160	2665	-	F	Update of MG enhancements TC 6.6.17.x	18.1.0
2023-12	RAN#102	R5-236163	2668	-	F	Update of measGapId-r17 for MG enhancements TC	18.1.0
2023-12	RAN#102	R5-236196	2669	-	F	Editorial correction for 6.7.3.2.1	18.1.0
2023-12	RAN#102	R5-236198	2670	-	F	Addition of SMTC.7 and SMTC.8 into reference SMTC configuration in Annex	18.1.0
2023-12	RAN#102	R5-236199	2671	-	F	Addition of minimum requirements for FR2 7.6.15.0 - concurrent gaps	18.1.0
2023-12	RAN#102	R5-236200	2672	-	F	Addition of new test case 7.6.15.2 for overlapping concurrent gaps	18.1.0
2023-12	RAN#102	R5-236201	2673	-	F	Addition of new test case 7.6.15.3 for concurrent gaps with PRS measurement	18.1.0
2023-12	RAN#102	R5-236202	2674	-	F	Update cell mapping table for FR2 concurrent gaps new test cases	18.1.0
2023-12	RAN#102	R5-236209	2676	-	F	Addition of NR SA FR2 SSB-based L1-RSRP measurement test case for PC6 devices	18.1.0
2023-12	RAN#102	R5-236212	2677	-	F	Addition of NR-U redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA test case	18.1.0
2023-12	RAN#102	R5-236213	2678	-	F	Addition of NR-U redirection from NR FR1 carrier without CCA to NR FR1 carrier under CCA test case	18.1.0
2023-12	RAN#102	R5-236216	2679	-	F	Completion of NR SA FR1 DL interruptions test case 6.5.7C.1	18.1.0
2023-12	RAN#102	R5-236217	2680	-	F	Completion of NR SA FR1 DL interruptions test case 6.5.7C.2	18.1.0
2023-12	RAN#102	R5-236227	2684	-	F	Completion of EN-DC FR1 fast SCell activation test case for 160 ms SCell measurement cycle	18.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-12	RAN#102	R5-236228	2685	-	F	Completion of EN-DC FR1 fast SCell activation test case for 640 ms SCell measurement cycle	18.1.0
2023-12	RAN#102	R5-236230	2687	-	F	Completion of EN-DC FR2 fast SCell in intra-band activation test case	18.1.0
2023-12	RAN#102	R5-236231	2688	-	F	Completion of NR SA FR1 fast SCell activation test case for 160 ms SCell measurement cycle	18.1.0
2023-12	RAN#102	R5-236232	2689	-	F	Completion of NR SA FR1 fast SCell activation test case for 640 ms SCell measurement cycle	18.1.0
2023-12	RAN#102	R5-236233	2690	-	F	Completion of NR SA FR2 fast SCell in intra-band activation test case	18.1.0
2023-12	RAN#102	R5-236362	2694	-	F	Correction of TRP specific BFR test cases	18.1.0
2023-12	RAN#102	R5-236383	2695	-	F	Addition of new test case 7.6.16.3 for NCSG	18.1.0
2023-12	RAN#102	R5-236384	2696	-	F	Addition of new test case 7.6.16.2 for NCSG	18.1.0
2023-12	RAN#102	R5-236385	2697	-	F	Addition of minimum requirements for 7.6.16.0 - FR2 NCSG	18.1.0
2023-12	RAN#102	R5-236386	2698	-	F	Update cell mapping table for FR2 NCSG new test cases	18.1.0
2023-12	RAN#102	R5-236454	2703	-	F	Update cell mapping table for FR2 Pre-MG new test cases	18.1.0
2023-12	RAN#102	R5-236455	2704	-	F	Addition of minimum requirements for 7.6.14.0 - FR2 Pre-MG	18.1.0
2023-12	RAN#102	R5-236682	2709	-	F	Addition of RedCap RRM TC 16.6.5.3	18.1.0
2023-12	RAN#102	R5-236704	2731	-	F	Addition of RedCap RRM TC 16.7.6.1	18.1.0
2023-12	RAN#102	R5-236705	2732	-	F	Addition of RedCap RRM TC 16.7.6.2	18.1.0
2023-12	RAN#102	R5-236709	2736	-	F	Addition of RedCap RRM TC 17.3.2.3.1	18.1.0
2023-12	RAN#102	R5-236711	2738	-	F	Addition of RedCap RRM TC 17.4.3.1	18.1.0
2023-12	RAN#102	R5-236712	2739	-	F	Addition of RedCap RRM TC 17.5.1.5	18.1.0
2023-12	RAN#102	R5-236713	2740	-	F	Addition of RedCap RRM TC 17.5.1.6	18.1.0
2023-12	RAN#102	R5-236715	2742	-	F	Addition of RedCap RRM TC 17.5.1.8	18.1.0
2023-12	RAN#102	R5-236721	2748	-	F	Correction to RedCap RRM TC 16.3.2.1.1 with TT	18.1.0
2023-12	RAN#102	R5-236722	2749	-	F	Correction to RedCap RRM TC 16.3.2.1.3 with TT	18.1.0
2023-12	RAN#102	R5-236724	2751	-	F	Correction to RedCap RRM TC 16.3.2.2.1 with TT	18.1.0
2023-12	RAN#102	R5-236725	2752	-	F	Correction to RedCap RRM TC 16.3.2.2.3 with TT	18.1.0
2023-12	RAN#102	R5-236726	2753	-	F	Correction to RedCap RRM TC 16.3.2.2.5 with TT	18.1.0
2023-12	RAN#102	R5-236727	2754	-	F	Correction to RedCap RRM TC 16.3.2.2.7 with TT	18.1.0
2023-12	RAN#102	R5-236728	2755	-	F	Correction to RedCap RRM TC 16.3.2.3.1 with TT	18.1.0
2023-12	RAN#102	R5-236730	2757	-	F	Correction to RedCap RRM TC 16.5.2.1 with TT	18.1.0
2023-12	RAN#102	R5-236731	2758	-	F	Correction to RedCap RRM TC 16.5.2.5 with TT	18.1.0
2023-12	RAN#102	R5-236732	2759	-	F	Correction to RedCap RRM TC 16.5.2.7 with TT	18.1.0
2023-12	RAN#102	R5-236734	2761	-	F	Correction to RedCap RRM TC 16.6.1.x	18.1.0
2023-12	RAN#102	R5-236736	2763	-	F	Corrections to BWP RMCs and configurations for RedCap RRM TCs	18.1.0
2023-12	RAN#102	R5-236737	2764	-	F	Corrections to Annex E for RedCap RRM TCs	18.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-12	RAN#102	R5-236748	2766	-	F	Correction to RRM enhancement TC 6.5.8.1	18.1.0
2023-12	RAN#102	R5-236749	2767	-	F	Correction to FR1 EN-DC TC 4.6.4.3	18.1.0
2023-12	RAN#102	R5-236750	2768	-	F	Correction to FR1 NR SA TC 6.6.4.3	18.1.0
2023-12	RAN#102	R5-236751	2769	-	F	Correction to CORESET RMC	18.1.0
2023-12	RAN#102	R5-236819	2773	-	F	Addition of new test case 7.6.15.1 for SA event triggered reporting tests with concurrent gaps	18.1.0
2023-12	RAN#102	R5-236821	2775	-	F	Addition of CCR settings for FR1 Link recovery procedures	18.1.0
2023-12	RAN#102	R5-236822	2776	-	F	Correction to SNR on RLM-RS in 6.5.1.1	18.1.0
2023-12	RAN#102	R5-236825	2777	-	F	Addition of SSB index assigned as BFD-RS to CSI-RS-based RLM for 2Rx	18.1.0
2023-12	RAN#102	R5-236916	2786	-	F	Correction to message contents for 4.5.2.3 and 4.5.2.4	18.1.0
2023-12	RAN#102	R5-236992	2787	-	F	Correction of FR2 EN-DC Inter-freq accuracy measurement test case 5.7.1.2 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-236993	2788	-	F	Correction of FR2 SA Inter-freq accuracy measurement test case 7.7.1.2 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-236994	2789	-	F	TT analysis correction for FR2 Inter-freq accuracy measurement test cases in Annex F	18.1.0
2023-12	RAN#102	R5-236997	2792	-	F	Correction of NR SA FR2 Cell reselection RedCap test case 17.1.1.1 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-236998	2793	-	F	Correction of NR SA FR2 Cell reselection RedCap test case 17.1.1.2 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-236999	2794	-	F	Correction of NR SA FR2 Cell reselection RedCap test case 17.1.1.3 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237000	2795	-	F	Correction of NR SA FR2 Cell reselection RedCap test case 17.1.1.4 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237015	2809	-	F	Correction of SA event triggered reporting with additional mandatory gap pattern test case 6.6.2.9	18.1.0
2023-12	RAN#102	R5-237018	2812	-	F	Addition of cell configuration mapping for rel-16 RRM test cases	18.1.0
2023-12	RAN#102	R5-237020	2814	-	F	Correction of Inter-RAT FR1 Cell reselection RedCap test case 16.1.2.6	18.1.0
2023-12	RAN#102	R5-237095	2816	-	F	Correction to Cell Configuration Maping for TC 6.3.3.2	18.1.0
2023-12	RAN#102	R5-237096	2817	-	F	Missing DRX.X1 configuration addition to Annex A.5 and formatting adaption	18.1.0
2023-12	RAN#102	R5-237097	2818	-	F	Core Spec alignment for RRM TC 6.5.1.9 Enh Power Saving	18.1.0
2023-12	RAN#102	R5-237098	2819	-	F	Core spec alignment for TC 5.5.1.1 and 5.5.1.2	18.1.0
2023-12	RAN#102	R5-237101	2822	-	F	Addition of minimum conformance requirement for FR1 RedCap 16.7.1.x test cases	18.1.0
2023-12	RAN#102	R5-237103	2824	-	F	Corrections for references of RedCap 2-step RA TC 16.3.2.2.6	18.1.0
2023-12	RAN#102	R5-237104	2825	-	F	Message content exception addition for RedCap 2-step RA TCs	18.1.0
2023-12	RAN#102	R5-237183	2846	-	F	Addition of clause 4.5.9.0 minimum conformance requirements for UE specific CBW change	18.1.0
2023-12	RAN#102	R5-237184	2847	-	F	Addition of UE specific CBW change on FR1 NR PSCell with non-DRX in synchronous EN-DC test case 4.5.9.1	18.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-12	RAN#102	R5-237185	2848	-	F	Addition of clause 4.6.6.0 minimum conformance requirements for measurements with autonomous gaps	18.1.0
2023-12	RAN#102	R5-237187	2850	-	F	Addition of clause 5.5.6.3.0 minimum conformance requirements for simultaneous DCI-based and timer-based active BWP switch on multiple CCs	18.1.0
2023-12	RAN#102	R5-237189	2852	-	F	Addition of clause 5.5.6.4.0 minimum conformance requirements for SCell dormancy switch	18.1.0
2023-12	RAN#102	R5-237191	2854	-	F	Addition of clause 5.5.10.0 minimum conformance requirements for UE specific CBW change on FR2 NR Pscell	18.1.0
2023-12	RAN#102	R5-237192	2855	-	F	Addition of UE specific CBW change on FR2 NR PSCell test case 5.5.10.1	18.1.0
2023-12	RAN#102	R5-237193	2856	-	F	Addition of clause 5.6.5.0 minimum conformance requirements for measurements with autonomous gaps	18.1.0
2023-12	RAN#102	R5-237195	2858	-	F	Addition of clause 6.6.7.0 minimum conformance requirements for NR measurements with autonomous gaps	18.1.0
2023-12	RAN#102	R5-237198	2861	-	F	Addition of clause 7.5.2.0.2 minimum conformance requirements for UE specific CBW change	18.1.0
2023-12	RAN#102	R5-237200	2863	-	F	Addition of clause 7.5.6.3.0 minimum conformance requirements for simultaneous DCI-based and timer-based active BWP switch on multiple CCs	18.1.0
2023-12	RAN#102	R5-237202	2865	-	F	Addition of clause 7.5.10.0 minimum conformance requirements for UE specific CBW change	18.1.0
2023-12	RAN#102	R5-237203	2866	-	F	Addition of NR FR2 UE specific CBW change of PCell with non-DRX in SA test case 7.5.10.1	18.1.0
2023-12	RAN#102	R5-237205	2868	-	F	Addition of clause 7.6.5.0 minimum conformance requirements for NR measurements with autonomous gaps	18.1.0
2023-12	RAN#102	R5-237218	2870	-	F	Update on relative angular offset in 2AoA testing for PC1 devices	18.1.0
2023-12	RAN#102	R5-237220	2872	-	F	Update on 16.4.1.1 test case	18.1.0
2023-12	RAN#102	R5-237222	2874	-	F	Update on DRX configuration in message content	18.1.0
2023-12	RAN#102	R5-237470	2827	1	F	Corrections to UE position provision for NR-NTN	18.1.0
2023-12	RAN#102	R5-237688	2830	1	F	Addition of NTN inter-frequency measurement test cases	18.1.0
2023-12	RAN#102	R5-237689	2831	1	F	Addition of NTN parallel measurement gap-based inter-frequency test cases	18.1.0
2023-12	RAN#102	R5-237702	2779	1	F	Correction for 38.533 Annex	18.1.0
2023-12	RAN#102	R5-237703	2772	1	F	Addition of new test case 7.6.14.1 for SA event triggered reporting tests with Pre-MG	18.1.0
2023-12	RAN#102	R5-237704	2774	1	F	Addition of new test case 7.6.16.1 for SA event triggered reporting tests with NCSG	18.1.0
2023-12	RAN#102	R5-237705	2707	1	F	Addition of RedCap RRM TC 16.2.1.1	18.1.0
2023-12	RAN#102	R5-237706	2708	1	F	Addition of RedCap RRM TC 16.2.1.2	18.1.0
2023-12	RAN#102	R5-237707	2711	1	F	Addition of RedCap RRM TC 16.7.2.3_1	18.1.0
2023-12	RAN#102	R5-237708	2712	1	F	Addition of RedCap RRM TC 16.7.2.3_2	18.1.0
2023-12	RAN#102	R5-237709	2771	1	F	Addition of powerControlOffsetSS in 16.5.2.2	18.1.0
2023-12	RAN#102	R5-237710	2821	1	F	Typo correction for SNR values at T3 - T5 for TC 16.5.2.4	18.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-12	RAN#102	R5-237711	2823	1	F	Addition of FR1 RedCap SS-RSRP intra-frequency measurement accuracy test cases	18.1.0
2023-12	RAN#102	R5-237712	2810	1	F	Correction of SA event triggered reporting tests for FR1 without gap when DRX is used 6.6.2.10	18.1.0
2023-12	RAN#102	R5-237713	2811	1	F	Correction of SA event triggered reporting tests for FR1 without gap when DRX is not used 6.6.2.11	18.1.0
2023-12	RAN#102	R5-237714	2813	1	F	Correction of Annex H to cover additional mandatory gap pattern with MGL 3ms	18.1.0
2023-12	RAN#102	R5-237715	2849	1	F	Addition of EN-DC intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC test case 4.6.6.1	18.1.0
2023-12	RAN#102	R5-237716	2851	1	F	Addition of E-UTRAN - NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs in synchronous EN-DC test case 5.5.6.3.1	18.1.0
2023-12	RAN#102	R5-237717	2853	1	F	Addition of E-UTRAN - NR FR2 PSCell SCell dormancy switch of single FR2 SCell inside active time test case 5.5.6.4.1	18.1.0
2023-12	RAN#102	R5-237718	2857	1	F	Addition of EN-DC inter-frequency CGI identification of NR neighbour cell in FR2 test case 5.6.5.1	18.1.0
2023-12	RAN#102	R5-237719	2820	1	F	Addition of SA FR1 NR-U SS-RSRQ measurement accuracy test cases	18.1.0
2023-12	RAN#102	R5-237720	2699	1	F	Correct of RRM Test Case	18.1.0
2023-12	RAN#102	R5-237737	2836	1	F	Addition of NR-U inter-frequency RSSI and Channel Occupancy tests	18.1.0
2023-12	RAN#102	R5-237738	2837	1	F	Addition of NR-U EN-DC unlicensed event triggered inter-frequency test cases	18.1.0
2023-12	RAN#102	R5-237739	2838	1	F	Addition of NR-U EN-DC inter-frequency licensed cell reporting test cases	18.1.0
2023-12	RAN#102	R5-237740	2839	1	F	Addition of NR-U EN-DC DCI-based and RRC-based Active BWP Switch test cases	18.1.0
2023-12	RAN#102	R5-237741	2840	1	F	Addition of NR-U EN-DC PSCell addition and release delay test case	18.1.0
2023-12	RAN#102	R5-237742	2713	1	F	Addition of RedCap RRM TC 16.7.2.4_1	18.1.0
2023-12	RAN#102	R5-237743	2714	1	F	Addition of RedCap RRM TC 16.7.2.4_2	18.1.0
2023-12	RAN#102	R5-237744	2715	1	F	Addition of RedCap RRM TC 16.7.3.1	18.1.0
2023-12	RAN#102	R5-237745	2716	1	F	Addition of RedCap RRM TC 16.7.3.2	18.1.0
2023-12	RAN#102	R5-237746	2717	1	F	Addition of RedCap RRM TC 16.7.3.3_1	18.1.0
2023-12	RAN#102	R5-237747	2718	1	F	Addition of RedCap RRM TC 16.7.3.3_2	18.1.0
2023-12	RAN#102	R5-237748	2719	1	F	Addition of RedCap RRM TC 16.7.3.4_1	18.1.0
2023-12	RAN#102	R5-237749	2720	1	F	Addition of RedCap RRM TC 16.7.3.4_2	18.1.0
2023-12	RAN#102	R5-237750	2729	1	F	Addition of RedCap RRM TC 16.7.5.1	18.1.0
2023-12	RAN#102	R5-237751	2730	1	F	Addition of RedCap RRM TC 16.7.5.2	18.1.0
2023-12	RAN#102	R5-237752	2733	1	F	Addition of RedCap RRM TC 17.2.1.1	18.1.0
2023-12	RAN#102	R5-237753	2734	1	F	Addition of RedCap RRM TC 17.3.1.1	18.1.0
2023-12	RAN#102	R5-237754	2735	1	F	Addition of RedCap RRM TC 17.3.1.2	18.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-12	RAN#102	R5-237755	2737	1	F	Addition of RedCap RRM TC 17.4.1.1	18.1.0
2023-12	RAN#102	R5-237756	2741	1	F	Addition of RedCap RRM TC 17.5.1.7	18.1.0
2023-12	RAN#102	R5-237757	2743	1	F	Addition of RedCap RRM TC 17.5.4.1.1	18.1.0
2023-12	RAN#102	R5-237758	2744	1	F	Addition of RedCap RRM TC 17.5.4.2.1	18.1.0
2023-12	RAN#102	R5-237759	2745	1	F	Addition of RedCap RRM TC 17.6.4.1	18.1.0
2023-12	RAN#102	R5-237760	2859	1	F	Addition of SA intra-frequency CGI identification of NR neighbor cell in FR1 test case 6.6.7.1	18.1.0
2023-12	RAN#102	R5-237761	2860	1	F	Addition of identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA test case 6.6.7.2	18.1.0
2023-12	RAN#102	R5-237762	2862	1	F	Addition of SA interruptions at NR SRS carrier-based switching test case 7.5.2.2	18.1.0
2023-12	RAN#102	R5-237763	2864	1	F	Addition of Active BWP switch on multiple SCells with non-DRX in SA test case 7.5.6.3.1	18.1.0
2023-12	RAN#102	R5-237764	2867	1	F	Addition of SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2) (rel16 additional mandatory gap pattern 17) test case 7.6.2.9	18.1.0
2023-12	RAN#102	R5-237765	2869	1	F	Addition of SA inter-frequency CGI reporting in autonomous gaps test (PCell in FR2) test case 7.6.5.1	18.1.0
2023-12	RAN#102	R5-237766	2835	1	F	Applicability update for r17 HST inter-frequency tests	18.1.0
2023-12	RAN#102	R5-237767	2843	1	F	Applicability update to FR2 inter-frequency tests	18.1.0
2023-12	RAN#102	R5-237768	2841	1	F	Editorial changes to 38.533	18.1.0
2023-12	RAN#102	R5-237769	2844	1	F	Applicability update for r16 supported gap pattern	18.1.0
2023-12	RAN#102	R5-237770	2845	1	F	Update to RRM test 6.3.1.4	18.1.0
2023-12	RAN#102	R5-237785	2681	1	F	Completion of NR SA FR1 intra-frequency CGI identification of NR neighbour cell for 1 Rx UE	18.1.0
2023-12	RAN#102	R5-237786	2747	1	F	Correction to RedCap RRM TC 16.3.1.9 with TT	18.1.0
2023-12	RAN#102	R5-237787	2750	1	F	Correction to RedCap RRM TC 16.3.2.1.5 with TT	18.1.0
2023-12	RAN#102	R5-237788	2756	1	F	Correction to RedCap RRM TC 16.3.2.3.3 with TT	18.1.0
2023-12	RAN#102	R5-237789	2790	1	F	Correction of NR SA FR1 Cell reselection RedCap test case 16.1.1.1 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237790	2791	1	F	Annex F correction for RedCap test cases including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237793	2683	1	F	Completion of 7.6.3.6 test case with message content section and test tolerance values.	18.1.0
2023-12	RAN#102	R5-237803	2686	1	F	Completion of EN-DC FR1 test case for the conditional addition delay of PSCell	18.1.0
2023-12	RAN#102	R5-237804	2691	1	F	Measurement uncertainty and test tolerance updation of fast SCell activation and CPAC test cases	18.1.0
2023-12	RAN#102	R5-237805	2700	1	F	Update of RRM Test Case 4.5.2.10 EN-DC FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell	18.1.0
2023-12	RAN#102	R5-237806	2701	1	F	Update of RRM Test Case 4.5.10.1 EN-DC FR1 PSCell activation and deactivation delay	18.1.0
2023-12	RAN#102	R5-237807	2702	1	F	Update of RRM Test Case 5.5.12.1 EN-DC FR2 PSCell activation and deactivation delay	18.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-12	RAN#102	R5-237808	2781	1	F	Update of 5.5.13.1 Conditional PSCell Addition including test tolerance	18.1.0
2023-12	RAN#102	R5-237809	2782	1	F	Update of 7.5.12.1 Conditional PSCell Addition including test tolerance	18.1.0
2023-12	RAN#102	R5-237810	2785	1	F	Update of Annex F for MR-DC enhancement test cases including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237811	2842	1	F	Update to SA FR2 CSI-RS based RLM test cases including TT	18.1.0
2023-12	RAN#102	R5-237827	2664	1	F	Modification to CG-SDT RRM test case for FR2	18.1.0
2023-12	RAN#102	R5-237830	2808	1	F	Editorial correction of test cases 7.1.1.x	18.1.0
2023-12	RAN#102	R5-237833	2832	1	F	Addition of NTN intra-frequency gap-based measurement test cases	18.1.0
2023-12	RAN#102	R5-237865	2828	1	F	Satllite access configuration update	18.1.0
2023-12	RAN#102	R5-237866	2829	1	F	Updates to High level test procedure for SAN RRM tests	18.1.0
2023-12	RAN#102	R5-237886	2796	1	F	Correction of NR SA FR1-FR1 Event triggered reporting with DRX and without SSB time index for 1Rx test case 16.6.2.1 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237887	2797	1	F	Correction of NR SA FR1-FR1 Event triggered reporting with DRX and without SSB time index for 2Rx test case 16.6.2.2 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237888	2798	1	F	Correction of NR SA FR1-FR1 Event triggered reporting without DRX and without SSB time index for 1Rx test case 16.6.2.3 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237889	2799	1	F	Correction of NR SA FR1-FR1 Event triggered reporting without DRX and without SSB time index for 2Rx test case 16.6.2.4 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237890	2800	1	F	Correction of NR SA FR1-FR1 Event triggered reporting without DRX and with SSB time index for 1Rx test case 16.6.2.5 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237891	2801	1	F	Correction of NR SA FR1-FR1 Event triggered reporting without DRX and with SSB time index for 2Rx UE test case 16.6.2.6 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237892	2802	1	F	Correction of NR SA FR1-FR1 Event triggered reporting with DRX and SSB time index for 1Rx UE test case 16.6.2.7 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237893	2803	1	F	Correction of NR SA FR1-FR1 Event triggered reporting with DRX and SSB time index for 2Rx UE test case 16.6.2.8 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237894	2804	1	F	Correction of NR SA FR1-FR1 Event triggered reporting with additional mandatory gap pattern for 1Rx test case 16.6.2.9 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237895	2805	1	F	Correction of NR SA FR1-FR1 Event triggered reporting with additional mandatory gap pattern for 2Rx UEtest case 16.6.2.10 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237896	2806	1	F	Correction of NR SA FR1-FR1 Event triggered reporting without measurement gap for 1Rx UE test case 16.6.2.11 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237897	2815	1	F	SMTC configuration for RedCap	18.1.0
2023-12	RAN#102	R5-237914	2682	1	F	Completion of NR SA FR1 intra-frequency CGI identification of NR neighbour cell for 2 Rx UE	18.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-12	RAN#102	R5-237915	2710	1	F	Addition of RedCap RRM TC 16.6.5.4	18.1.0
2023-12	RAN#102	R5-237916	2721	1	F	Addition of RedCap RRM TC 16.7.4.1_1	18.1.0
2023-12	RAN#102	R5-237917	2722	1	F	Addition of RedCap RRM TC 16.7.4.1_2	18.1.0
2023-12	RAN#102	R5-237918	2723	1	F	Addition of RedCap RRM TC 16.7.4.2_1	18.1.0
2023-12	RAN#102	R5-237919	2724	1	F	Addition of RedCap RRM TC 16.7.4.2_2	18.1.0
2023-12	RAN#102	R5-237920	2725	1	F	Addition of RedCap RRM TC 16.7.4.3_1	18.1.0
2023-12	RAN#102	R5-237921	2726	1	F	Addition of RedCap RRM TC 16.7.4.3_2	18.1.0
2023-12	RAN#102	R5-237922	2727	1	F	Addition of RedCap RRM TC 16.7.4.4_1	18.1.0
2023-12	RAN#102	R5-237923	2728	1	F	Addition of RedCap RRM TC 16.7.4.4_2	18.1.0
2023-12	RAN#102	R5-237924	2746	1	F	Correction to RedCap RRM TC 16.3.1.7 with TT	18.1.0
2023-12	RAN#102	R5-237925	2762	1	F	Correction to RedCap RRM TC 16.6.7.1 and 16.6.7.2	18.1.0
2023-12	RAN#102	R5-237926	2765	1	F	Corrections to Annex F for RedCap RRM TCs	18.1.0
2023-12	RAN#102	R5-237927	2826	1	F	Corrections for RedCap RA TCs	18.1.0
2023-12	RAN#102	R5-237938	2705	1	F	Addition of new test case 7.6.14.2 for FR2 Pre-MG	18.1.0
2023-12	RAN#102	R5-237942	2807	1	F	Correction of NR SA FR1-FR1 Event triggered reporting without measurement gap for 2Rx UE test case 16.6.2.12 including Test Tolerance	18.1.0
2023-12	RAN#102	R5-237950	2778	1	F	Correction to message exception in 16.5.3.1.2 and 16.5.3.2.2	18.1.0
2023-12	RAN#102	R5-237951	2693	1	F	Updating unified TCI switch test cases to add MU and TT	18.1.0
2023-12	RAN#102	R5-237953	2783	1	F	Update of 7.5.14 PSCell activation including test tolerance	18.1.0
2023-12	RAN#102	R5-237954	2780	1	F	Update of 7.5.3.14 Fast SCell activation including test tolerance	18.1.0
2023-12	RAN#102	R5-237959	2675	1	F	Addition of new NR SA FR2 event triggered reporting test case for PC6 devices	18.1.0
2023-12	RAN#102	R5-237960	2833	1	F	Update to FR1 CG-SDT test case including TTs	18.1.0
2023-12	RAN#102	R5-237962	2834	1	F	Update to RRM tests 16.3.1.7 and 16.3.1.8	18.1.0
2023-12	RAN#102	R5-237966	2871	1	F	Update on 6.5.1.9 RLM for relaxed measurement criteria	18.1.0
2024-03	RAN#103	R5-240026	2875	-	F	Editorial corrections for 6.7.3.1 and 6.7.3.2.2	18.2.0
2024-03	RAN#103	R5-240369	2884	-	F	Addition of NR SA FR1 DL interruptions at switching between two uplink carriers for 6.5.7A.1	18.2.0
2024-03	RAN#103	R5-240372	2887	-	F	Test tolerances and measurement uncertainty for DL interruptions test cases 6.5.7A.1, 6.5.7B.1 and 6.5.7C.1	18.2.0
2024-03	RAN#103	R5-240381	2888	-	F	Update of test procedure in 4.5.10.1 PSCell activation for EN-DC	18.2.0
2024-03	RAN#103	R5-240382	2889	-	F	Correction to 4.5.11.1 EN-DC FR1 Conditional PSCell Addition	18.2.0
2024-03	RAN#103	R5-240383	2890	-	F	Update of measurement configuration for 5.5.13.1	18.2.0
2024-03	RAN#103	R5-240384	2891	-	F	Update of measurement configuration for 7.5.12.1	18.2.0
2024-03	RAN#103	R5-240385	2892	-	F	Update of message contents for 4.5.3.7 and 6.5.3.11	18.2.0
2024-03	RAN#103	R5-240449	2893	-	F	Resubmission of Annex B Corrections to BWP RMCs and configurations for RedCap RRM TCs	18.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#103	R5-240518	2894	-	F	Update to NR-U redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA test case	18.2.0
2024-03	RAN#103	R5-240519	2895	-	F	Update to NR-U redirection from NR FR1 carrier without CCA to NR FR1 carrier under CCA test case	18.2.0
2024-03	RAN#103	R5-240681	2901	-	F	Addition of RedCap RRM test case 17.5.3.1.1	18.2.0
2024-03	RAN#103	R5-240682	2902	-	F	Addition of RedCap RRM test case 17.5.3.2.1	18.2.0
2024-03	RAN#103	R5-240683	2903	-	F	Addition of RedCap RRM test case 17.5.5.1.1	18.2.0
2024-03	RAN#103	R5-240684	2904	-	F	Addition of RedCap RRM test case 17.5.5.2.1	18.2.0
2024-03	RAN#103	R5-240685	2905	-	F	Addition of RedCap RRM test case 17.5.6.1	18.2.0
2024-03	RAN#103	R5-240686	2906	-	F	Addition of RedCap RRM test case 17.7.1.1	18.2.0
2024-03	RAN#103	R5-240687	2907	-	F	Addition of RedCap RRM test case 17.7.1.2	18.2.0
2024-03	RAN#103	R5-240688	2908	-	F	Addition of RedCap RRM test case 17.7.2.1	18.2.0
2024-03	RAN#103	R5-240689	2909	-	F	Addition of RedCap RRM test case 17.7.2.2	18.2.0
2024-03	RAN#103	R5-240690	2910	-	F	Addition of RedCap RRM test case 17.7.3.1	18.2.0
2024-03	RAN#103	R5-240691	2911	-	F	Addition of RedCap RRM test case 17.7.3.2	18.2.0
2024-03	RAN#103	R5-240692	2912	-	F	Addition of RedCap RRM test case 17.7.4.1	18.2.0
2024-03	RAN#103	R5-240695	2915	-	F	Correction to RedCap RRM test case 16.5.2.3	18.2.0
2024-03	RAN#103	R5-240696	2916	-	F	Correction to RedCap RRM test case 16.5.4.1 and 16.5.4.2	18.2.0
2024-03	RAN#103	R5-240697	2917	-	F	Correction to RedCap RRM test case 17.4.1.1	18.2.0
2024-03	RAN#103	R5-240698	2918	-	F	Correction to RedCap RRM test case 17.6.4.1	18.2.0
2024-03	RAN#103	R5-240699	2919	-	F	Correction to SSB time offset in NCD-SSB test cases	18.2.0
2024-03	RAN#103	R5-240700	2920	-	F	Correction to RRM enh test case 6.5.8.1	18.2.0
2024-03	RAN#103	R5-240707	2927	-	F	Correction to RedCap RRM test cases 16.3.2.2.X with TT	18.2.0
2024-03	RAN#103	R5-240709	2929	-	F	Correction to RedCap RRM test case 16.6.5.4 with TT	18.2.0
2024-03	RAN#103	R5-240710	2930	-	F	Correction to RedCap RRM test case 16.7.2.3.1 with TT	18.2.0
2024-03	RAN#103	R5-240714	2934	-	F	Correction to RedCap RRM test case 16.7.3.1 with TT	18.2.0
2024-03	RAN#103	R5-240715	2935	-	F	Correction to RedCap RRM test case 16.7.3.2 with TT	18.2.0
2024-03	RAN#103	R5-240716	2936	-	F	Correction to RedCap RRM test case 16.7.3.3.1 with TT	18.2.0
2024-03	RAN#103	R5-240717	2937	-	F	Correction to RedCap RRM test case 16.7.3.3.2 with TT	18.2.0
2024-03	RAN#103	R5-240718	2938	-	F	Correction to RedCap RRM test case 16.7.3.4.1 with TT	18.2.0
2024-03	RAN#103	R5-240720	2940	-	F	Correction to RedCap RRM test case 16.7.4.1.1 with TT	18.2.0
2024-03	RAN#103	R5-240721	2941	-	F	Correction to RedCap RRM test case 16.7.4.1.2 with TT	18.2.0
2024-03	RAN#103	R5-240722	2942	-	F	Correction to RedCap RRM test case 16.7.4.2.1 with TT	18.2.0
2024-03	RAN#103	R5-240723	2943	-	F	Correction to RedCap RRM test case 16.7.4.2.2 with TT	18.2.0
2024-03	RAN#103	R5-240724	2944	-	F	Correction to RedCap RRM test case 16.7.4.3.1 with TT	18.2.0
2024-03	RAN#103	R5-240725	2945	-	F	Correction to RedCap RRM test case 16.7.4.3.2 with TT	18.2.0
2024-03	RAN#103	R5-240726	2946	-	F	Correction to RedCap RRM test case 16.7.4.4.1 with TT	18.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#103	R5-240727	2947	-	F	Correction to RedCap RRM test case 16.7.4.4.2 with TT	18.2.0
2024-03	RAN#103	R5-240728	2948	-	F	Correction to RedCap RRM test case 16.7.5.1 with TT	18.2.0
2024-03	RAN#103	R5-240729	2949	-	F	Correction to RedCap RRM test case 16.7.5.2 with TT	18.2.0
2024-03	RAN#103	R5-240730	2950	-	F	Correction to RedCap RRM test case 16.7.6.1 with TT	18.2.0
2024-03	RAN#103	R5-240731	2951	-	F	Correction to RedCap RRM test case 16.7.6.2 with TT	18.2.0
2024-03	RAN#103	R5-240758	2955	-	F	Correction to FR1 4-step RACH test cases with TT	18.2.0
2024-03	RAN#103	R5-240759	2956	-	F	Correction to FR1 2-step RACH test cases with TT	18.2.0
2024-03	RAN#103	R5-240760	2957	-	F	Correction to FR1 inter frequency SS SINR relative accuracy test cases with TT	18.2.0
2024-03	RAN#103	R5-240761	2958	-	F	Correction to FR1 L1 RSRP absolute accuracy test cases with TT	18.2.0
2024-03	RAN#103	R5-240762	2959	-	F	Correction to FR1 LTE RSRP accuracy test case 6.7.5.1 with TT	18.2.0
2024-03	RAN#103	R5-240790	2961	-	F	Addition of Test Tolerance into Annex F for RedCap test cases	18.2.0
2024-03	RAN#103	R5-240793	2962	-	F	Correction of Test tolerance for FR2 Inter frequency test case	18.2.0
2024-03	RAN#103	R5-240798	2967	-	F	Addition of NR SA FR2-FR2 Event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2) test case 17.6.2.1 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-240799	2968	-	F	Addition of NR SA FR2-FR2 Event triggered reporting tests For FR2 without SSB time index detection when DRX is used (PCell in FR2) test case 17.6.2.2 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-240800	2969	-	F	Addition of NR SA FR2-FR2 Event triggered reporting tests For FR2 with SSB time index detection when DRX is not used (PCell in FR2) test case 17.6.2.3 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-240801	2970	-	F	Addition of NR SA FR2-FR2 Event triggered reporting tests For FR2 with SSB time index detection when DRX is used (PCell in FR2) test case 17.6.2.4 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-240802	2971	-	F	Addition of cell configuration mapping for event triggered measurement test cases for RedCap	18.2.0
2024-03	RAN#103	R5-240803	2972	-	F	Addition of NR_U test case 11.5.1.1	18.2.0
2024-03	RAN#103	R5-240804	2973	-	F	Addition of NR_U test case 11.5.1.2	18.2.0
2024-03	RAN#103	R5-240805	2974	-	F	Addition of NR_U test case 11.5.1.3	18.2.0
2024-03	RAN#103	R5-240806	2975	-	F	Addition of NR_U test case 11.5.1.4	18.2.0
2024-03	RAN#103	R5-240807	2976	-	F	Addition of NR_U test case 11.5.1.9	18.2.0
2024-03	RAN#103	R5-240809	2978	-	F	Addition of NR_U test case 11.5.2.4	18.2.0
2024-03	RAN#103	R5-240811	2979	-	F	Addition of NR_U test case 11.5.2.5	18.2.0
2024-03	RAN#103	R5-240812	2980	-	F	Addition of NR_U test case 11.5.2.6	18.2.0
2024-03	RAN#103	R5-240813	2981	-	F	Addition of NR_U test case 11.5.2.7	18.2.0
2024-03	RAN#103	R5-240814	2982	-	F	Addition of NR_U test case 11.5.2.8	18.2.0
2024-03	RAN#103	R5-240815	2983	-	F	Addition of NR_U test case 11.5.2.9	18.2.0
2024-03	RAN#103	R5-240816	2984	-	F	Addition of NR_U test case 11.5.2.10	18.2.0
2024-03	RAN#103	R5-240920	2987	-	F	Cell Mapping correction for TC 6.5.6.1.1 in Annex E	18.2.0
2024-03	RAN#103	R5-240921	2988	-	F	Cell Mapping correction for TC 6.6.1.8 in Annex E	18.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#103	R5-241114	2990	-	F	Correction to OCNG references in 16.1.1 and 16.1.2	18.2.0
2024-03	RAN#103	R5-241115	2991	-	F	Correction to title of RedCap test cases	18.2.0
2024-03	RAN#103	R5-241116	2992	-	F	Correction to PRACH config in 16.5.2.4	18.2.0
2024-03	RAN#103	R5-241120	2996	-	F	Correction to QuantityConfigu-DEFAULT in H.3.1	18.2.0
2024-03	RAN#103	R5-241160	3005	-	F	Correction to EN-DC FR1 Beam Failure TCs 4.5.5.x	18.2.0
2024-03	RAN#103	R5-241162	3006	-	F	Correction to EN-DC FR2 Beam Failure TCs 5.5.5.x	18.2.0
2024-03	RAN#103	R5-241198	3008	-	F	Addition of new test case 4.7.8.2 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell	18.2.0
2024-03	RAN#103	R5-241200	3009	-	F	Correct of EN-DC FR1 addition and release delay of known PSCell for test case 4.5.7.1 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-241211	3012	-	F	Annex E.14 correction for new RedCap test cases	18.2.0
2024-03	RAN#103	R5-241213	3014	-	F	Correction of NR SA FR1 SS-RSRP absolute measurement accuracy for RedCap 1 Rx UE test case 16.7.1.1.1 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-241214	3015	-	F	Correction of NR SA FR1 SS-RSRP relative measurement accuracy for 1 Rx UE test case 16.7.1.1.2 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-241215	3016	-	F	Correction of NR SA FR1 SS-RSRP absolute measurement accuracy for RedCap 2 Rx UE test case 16.7.1.2.1 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-241216	3017	-	F	Correction of NR SA FR1 SS-RSRP relative measurement accuracy for 2 Rx UE test case 16.7.1.2.2 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-241217	3018	-	F	Addition of NR SA FR1 SS-RSRQ measurement accuracy for 1 Rx UE test case 16.7.2.1 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-241218	3019	-	F	Addition of NR SA FR1 SS-RSRQ measurement accuracy for 2 Rx UE test case 16.7.2.2 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-241219	3020	-	F	Addition of RRM RedCap test cases 16.7.1.3.1, 16.7.1.3.2	18.2.0
2024-03	RAN#103	R5-241220	3021	-	F	Addition of RRM RedCap test cases 16.7.1.4.1, 16.7.1.4.2	18.2.0
2024-03	RAN#103	R5-241227	3022	-	F	Editorial Correction to RedCap PRACH TC 16.3.2.2.8	18.2.0
2024-03	RAN#103	R5-241228	3023	-	F	Editorial corrections for RedCap test cases 18.3.1.x	18.2.0
2024-03	RAN#103	R5-241233	3026	-	F	Editorial correction in Table 5.6.1.3.5-2	18.2.0
2024-03	RAN#103	R5-241235	3028	-	F	Correction to BFD-LR test case 5.5.5.5 message content	18.2.0
2024-03	RAN#103	R5-241238	3031	-	F	Editor correction to Test Procedure 5.5.1.2	18.2.0
2024-03	RAN#103	R5-241241	3032	-	F	Addition of SA FR1 NR-U intra-frequency SS-SINR measurement accuracy test cases	18.2.0
2024-03	RAN#103	R5-241242	3033	-	F	Addition of SA FR1 NR-U inter-frequency SS-SINR measurement accuracy test cases	18.2.0
2024-03	RAN#103	R5-241243	3034	-	F	Addition of SA FR1 NR-U intra-frequency RSSI measurement accuracy test cases	18.2.0
2024-03	RAN#103	R5-241264	3035	-	F	Core Spec alignment for RedCap test cases 18.3.1.x	18.2.0
2024-03	RAN#103	R5-241265	3036	-	F	General update to NTN tests	18.2.0
2024-03	RAN#103	R5-241266	3037	-	F	Addition of NTN timing accuracy test 14.3.1.1	18.2.0
2024-03	RAN#103	R5-241267	3038	-	F	Addition of NTN time-based CHO tests 14.2.1.x	18.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#103	R5-241268	3039	-	F	Addition of NTN intra-frequency cell reselection tests 14.1.x	18.2.0
2024-03	RAN#103	R5-241269	3040	-	F	Addition of NTN SS-SINR measurement accuracy tests 14.6.3.x	18.2.0
2024-03	RAN#103	R5-241272	3042	-	F	Addition of NR-U SA BWP switch tests including TT	18.2.0
2024-03	RAN#103	R5-241273	3043	-	F	Addition of UL active BWP switch test 10.3.5.1 including TT	18.2.0
2024-03	RAN#103	R5-241274	3044	-	F	Update of NR-U Annex E and F including TT	18.2.0
2024-03	RAN#103	R5-241275	3045	-	F	Update to NR-U general sections	18.2.0
2024-03	RAN#103	R5-241276	3046	-	F	Addition of NR-U UE Timing Tests 10.2.x	18.2.0
2024-03	RAN#103	R5-241277	3047	-	F	Addition of NR-U L1-RSRP accuracy test 10.5.4.1	18.2.0
2024-03	RAN#103	R5-241278	3048	-	F	Addition of NR-U RSSI measurement accuracy tests 10.5.5.x	18.2.0
2024-03	RAN#103	R5-241279	3049	-	F	Addition of NR-U Channel occupancy measurement accuracy tests 10.5.6.x	18.2.0
2024-03	RAN#103	R5-241280	3050	-	F	Addition of NR-U L1-RSRP tests 10.4.3.x	18.2.0
2024-03	RAN#103	R5-241281	3051	-	F	Addition of NR-U IRAT tests 10.4.4.x	18.2.0
2024-03	RAN#103	R5-241282	3052	-	F	Update to NSA NR-U tests including TT	18.2.0
2024-03	RAN#103	R5-241283	3053	-	F	Update to SA NR-U tests including TT	18.2.0
2024-03	RAN#103	R5-241284	3054	-	F	Update to OCNG noise power in UL CCA model	18.2.0
2024-03	RAN#103	R5-241285	3055	-	F	Core alignment for NR-U common sections	18.2.0
2024-03	RAN#103	R5-241295	3056	-	F	Cleanup on FR1 CG-SDT test 6.2.1	18.2.0
2024-03	RAN#103	R5-241296	3057	-	F	Addition of RedCap SA FR2 SSB RLM OOS in DRX test case 17.5.1.3	18.2.0
2024-03	RAN#103	R5-241297	3058	-	F	Addition of RedCap SA FR2 SSB BFR test cases 17.5.2.1 and 17.5.2.2	18.2.0
2024-03	RAN#103	R5-241298	3059	-	F	Update to RRM test 16.3.1.8 including TT	18.2.0
2024-03	RAN#103	R5-241299	3060	-	F	Correction to stationary relaxed measurement criterion tests	18.2.0
2024-03	RAN#103	R5-241300	3061	-	F	Update to Re-establishment test cases	18.2.0
2024-03	RAN#103	R5-241301	3062	-	F	Applicability update for several RedCap tests	18.2.0
62024-03	RAN#103	R5-241304	3063	-	F	Update to RRM test 6.3.1.4 including TT	18.2.0
2024-03	RAN#103	R5-241311	3064	-	F	Addition of Clause 4.7.9.0 minimum conformance requirements for CSI-RSRQ	18.2.0
2024-03	RAN#103	R5-241312	3065	-	F	Addition of EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell test case 4.7.9.1	18.2.0
2024-03	RAN#103	R5-241313	3066	-	F	Addition of EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell test case 4.7.9.2	18.2.0
2024-03	RAN#103	R5-241314	3067	-	F	Addition of Clause 4.7.10.0 minimum conformance requirements for CSI-SINR	18.2.0
2024-03	RAN#103	R5-241315	3068	-	F	Addition of EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell test case 4.7.10.1	18.2.0
2024-03	RAN#103	R5-241316	3069	-	F	Addition of EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell l test case 4.7.10.2	18.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#103	R5-241317	3070	-	F	Addition of Clause 5.7.8.0 minimum conformance requirements for CSI-RSRQ	18.2.0
2024-03	RAN#103	R5-241318	3071	-	F	Addition of EN-DC intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell test case 5.7.8.1	18.2.0
2024-03	RAN#103	R5-241319	3072	-	F	Addition of EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell test case 5.7.8.2	18.2.0
2024-03	RAN#103	R5-241320	3073	-	F	Addition of Clause 5.7.9.0 minimum conformance requirements for CSI-SINR	18.2.0
2024-03	RAN#103	R5-241321	3074	-	F	Addition of EN-DC intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell test case 5.7.9.1	18.2.0
2024-03	RAN#103	R5-241322	3075	-	F	Addition of EN-DC inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell test case 5.7.9.2	18.2.0
2024-03	RAN#103	R5-241323	3076	-	F	Addition of Clause 6.7.11.0 minimum conformance requirements for CSI-RSRQ	18.2.0
2024-03	RAN#103	R5-241324	3077	-	F	Addition of SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell test case 6.7.11.1	18.2.0
2024-03	RAN#103	R5-241325	3078	-	F	Addition of SA inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell test case 6.7.11.2	18.2.0
2024-03	RAN#103	R5-241326	3079	-	F	Addition of Clause 6.7.12.0 minimum conformance requirements for CSI-SINR	18.2.0
2024-03	RAN#103	R5-241327	3080	-	F	Addition of SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell test case 6.7.12.1	18.2.0
2024-03	RAN#103	R5-241328	3081	-	F	Addition of SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell test case 6.7.12.2	18.2.0
2024-03	RAN#103	R5-241329	3082	-	F	Addition of Clause 7.7.8.0 minimum conformance requirements for CSI-RSRQ	18.2.0
2024-03	RAN#103	R5-241330	3083	-	F	Addition of SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell test case 7.7.8.1	18.2.0
2024-03	RAN#103	R5-241331	3084	-	F	Addition of SA inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell test case 7.7.8.2	18.2.0
2024-03	RAN#103	R5-241332	3085	-	F	Addition of Clause 7.7.9.0 minimum conformance requirements for CSI-SINR	18.2.0
2024-03	RAN#103	R5-241333	3086	-	F	Addition of SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell test case 7.7.9.1	18.2.0
2024-03	RAN#103	R5-241335	3088	-	F	Addition of test cases 4.5.9.1, 5.5.6.3.1, and 5.5.6.4.1 to Annex E	18.2.0
2024-03	RAN#103	R5-241447	3091	-	F	Correction to Annex F for R15 RRM test cases	18.2.0
2024-03	RAN#103	R5-241670	2925	1	F	Correction to RedCap RRM test case 16.2.1.1 with TT	18.2.0
2024-03	RAN#103	R5-241671	2926	1	F	Correction to RedCap RRM test case 16.2.1.2 with TT	18.2.0
2024-03	RAN#103	R5-241672	2952	2	F	Correction to Annex F for RedCap RRM test cases	18.2.0
2024-03	RAN#103	R5-241673	2953	1	F	Correction to SDT RRM test case 6.2.1 with TT	18.2.0
2024-03	RAN#103	R5-241677	2898	1	F	Correction to FR2 SA event triggered reporting tests with Pre-MG including TT	18.2.0
2024-03	RAN#103	R5-241678	2899	1	F	Correction to FR2 SA event triggered reporting tests with concurrent gaps including TT	18.2.0
2024-03	RAN#103	R5-241679	2900	1	F	Correction to FR2 SA event triggered reporting tests with NCSG including TT	18.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#103	R5-241826	2985	1	F	Removal of Editor Note affecting to TC 5.5.5.9	18.2.0
2024-03	RAN#103	R5-241827	2977	1	F	Addition of NR_U test case 11.5.2.3	18.2.0
2024-03	RAN#103	R5-241828	3041	1	F	Core alignment for NSA NR-U tests	18.2.0
2024-03	RAN#103	R5-241829	2921	1	F	Correction to RRM enh test case 6.6.2.9	18.2.0
2024-03	RAN#103	R5-241830	3007	1	F	Addition of new test case 4.7.8.1 EN-DC FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell	18.2.0
2024-03	RAN#103	R5-241831	3087	1	F	Addition of SA inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell test case 7.7.9.2	18.2.0
2024-03	RAN#103	R5-241832	2886	1	F	Cell configuration mapping for DL interruptions test cases 6.5.7A.1 and 6.5.7B.1	18.2.0
2024-03	RAN#103	R5-241833	2989	1	F	Correct Table 4.3.2.2.1.4.1-2 & Table 4.3.2.2.2.4.1-2 & Table 4.3.2.2.3.4.1-2 & Table 4.3.2.2.4.4.1-2 of test frequency	18.2.0
2024-03	RAN#103	R5-241834	2995	1	F	Correction to test applicability of 4.6.1.7	18.2.0
2024-03	RAN#103	R5-241835	3025	1	F	Correction for test case 5.5.6.2.1	18.2.0
2024-03	RAN#103	R5-241836	3027	1	F	Corrections to BFD-LR test case 5.5.5.5	18.2.0
2024-03	RAN#103	R5-241837	3024	1	F	Corrections to test procedure for 2-step RACH TC 6.3.2.2.4	18.2.0
2024-03	RAN#103	R5-241838	2881	1	F	Correction to Table H.3.1-8A	18.2.0
2024-03	RAN#103	R5-241839	2882	1	F	Correction to Table H.3.1-12	18.2.0
2024-03	RAN#103	R5-241840	2883	1	F	Correction to Table H.3.1-12A	18.2.0
2024-03	RAN#103	R5-241862	2897	1	F	Introducing the Re-Positioning Concept for FR2 RRM TCs	18.2.0
2024-03	RAN#103	R5-241886	2928	1	F	Correction to RedCap RRM test case 16.6.5.3 with TT	18.2.0
2024-03	RAN#103	R5-241893	3089	1	F	Addition of test cases 4.5.9.1, 5.5.6.3.1, and 5.5.6.4.1 to Annex F	18.2.0
2024-03	RAN#103	R5-241896	2885	1	F	Addition of NR SA FR1 DL interruptions at switching between two uplink bands for 6.5.7B.1	18.2.0
2024-03	RAN#103	R5-241901	3010	1	F	Correct of Test Tolerance into Annex F for EN-DC FR1 addition and release delay of known PSCell	18.2.0
2024-03	RAN#103	R5-241963	2939	1	F	Correction to RedCap RRM test case 16.7.3.4.2 with TT	18.2.0
2024-03	RAN#103	R5-241964	2998	1	F	Correction to test configuration in 16.4.1.2 and 16.5.2.2	18.2.0
2024-03	RAN#103	R5-241965	2999	1	F	Correction to PDCCH level in CSI-RS based RLM test cases for RedCap	18.2.0
2024-03	RAN#103	R5-241967	2997	1	F	Correction to PDCCH level in 6.5.1.9	18.2.0
2024-03	RAN#103	R5-241994	2923	1	F	Correction to EN-DC and NR SA SCell activation test cases	18.2.0
2024-03	RAN#103	R5-241995	2924	1	F	Correction to PCI updating formulas in RRM test cases	18.2.0
2024-03	RAN#103	R5-241996	3029	1	F	Removal of Editors note for RRM FR2 RLM in-sync test cases	18.2.0
2024-03	RAN#103	R5-241997	3030	1	F	Revision of Editors note for RRM FR2 RLM test cases	18.2.0
2024-03	RAN#103	R5-241998	3003	1	F	Correction to TRS Configuration in 6.3.2.1.3	18.2.0
2024-03	RAN#103	R5-241999	3004	1	F	Correction to PDCCH level in 6.5.1.8	18.2.0
2024-03	RAN#103	R5-242021	3002	1	F	Correction to test parameters in 5.6.1.3 and 5.6.1.4	18.2.0
2024-03	RAN#103	R5-242033	2963	1	F	Addition of NR - E-UTRA event-triggered reporting in non-DRX in FR1 for 1 Rx UE test case 16.6.3.1 including Test Tolerance	18.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#103	R5-242034	2964	1	F	Addition of NR - E-UTRA event-triggered reporting in non-DRX in FR1 for 2 Rx UE test case 16.6.3.2 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-242035	2965	1	F	Addition of NR - E-UTRA event-triggered reporting in DRX in FR1 for 1 Rx UE test case 16.6.3.3 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-242036	2966	1	F	Addition of NR - E-UTRA event-triggered reporting in non-DRX in FR1 for 2Rx UE test case 16.6.3.4 including Test Tolerance	18.2.0
2024-03	RAN#103	R5-242037	2879	1	F	Correction of Redcap inter-RAT E-UTRAN CGI test cases	18.2.0
2024-03	RAN#103	R5-242039	2913	1	F	Correction to NCD-SSB and SMTC RMCs	18.2.0
2024-03	RAN#103	R5-242040	2914	1	F	Correction to RedCap inter-frequency measurement test cases	18.2.0
2024-03	RAN#103	R5-242041	2931	1	F	Correction to RedCap RRM test case 16.7.2.3.2 with TT	18.2.0
2024-03	RAN#103	R5-242042	2932	1	F	Correction to RedCap RRM test case 16.7.2.4.1 with TT	18.2.0
2024-03	RAN#103	R5-242043	2933	1	F	Correction to RedCap RRM test case 16.7.2.4.2 with TT	18.2.0
2024-03	RAN#103	-	-	-	-	addition of small missing changes of R5-241965, R5-242040, R5-240718, R5-241963	18.2.1
2024-06	RAN#104	R5-242371	3094	-	F	Introduction of band n106 to NR band group for FR1	18.3.0
2024-06	RAN#104	R5-242579	3096	-	F	Correction to TC titles for event triggered reporting with measurement gap	18.3.0
2024-06	RAN#104	R5-242609	3100	-	F	Editorial correction to 7.6.3.6 test case	18.3.0
2024-06	RAN#104	R5-242611	3101	-	F	Incorrect clause number for test case 7.6.13.1	18.3.0
2024-06	RAN#104	R5-242612	3102	-	F	Addition of cell configuration mapping for HST FR2 test cases	18.3.0
2024-06	RAN#104	R5-242636	3107	-	F	Correction of NR SA event triggered reporting tests with additional mandatory gap pattern test case 6.6.2.9 including Test Tolerance	18.3.0
2024-06	RAN#104	R5-242637	3108	-	F	Correction of NR SA event triggered reporting tests for FR1 without gap when DRX is used test case 6.6.2.10 including Test Tolerance	18.3.0
2024-06	RAN#104	R5-242638	3109	-	F	Correction of NR SA event triggered reporting tests for FR1 without gap when DRX is not used test case 6.6.2.11 including Test Tolerance	18.3.0
2024-06	RAN#104	R5-242641	3112	-	F	Test Tolerance correction in Annex F for RRM enhancement test cases	18.3.0
2024-06	RAN#104	R5-242643	3114	-	F	Correction of NR_U SA Inter_RAT measurements test cases	18.3.0
2024-06	RAN#104	R5-242646	3116	-	F	Cell configuration correction in Annex E for SA FR2 RRM enhancement test cases	18.3.0
2024-06	RAN#104	R5-242647	3117	-	F	Minimum conformance requirements for FR2 SA event triggered reporting without gap	18.3.0
2024-06	RAN#104	R5-242727	3126	-	F	Correct Table 4.5.2.1.4.1-2 & Table 4.5.2.2.4.1-2 & Table 4.5.2.3.4.1-2 & Table 4.5.2.4.4.1-2 & Table 4.5.2.5.4.1-2 of test frequency	18.3.0
2024-06	RAN#104	R5-242867	3129	-	F	Addition of MCE RRM test case 6.5.7D.1	18.3.0
2024-06	RAN#104	R5-242868	3130	-	F	Addition of MCE RRM test case 6.5.7D.2	18.3.0
2024-06	RAN#104	R5-242869	3131	-	F	Addition of MCE RRM test case 6.5.7D.3	18.3.0
2024-06	RAN#104	R5-242870	3132	-	F	Correction to Annex E for MCE RRM test cases	18.3.0
2024-06	RAN#104	R5-242872	3133	-	F	Correction to R15 L1-RSRP absolute accuracy RRM test cases	18.3.0
2024-06	RAN#104	R5-242875	3136	-	F	Correction to R15 SCell activation test cases	18.3.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-06	RAN#104	R5-242876	3137	-	F	Correction to R16 relaxed measurement RRM test cases	18.3.0
2024-06	RAN#104	R5-242878	3138	-	F	Correction to RedCap RRM test case 16.1.1.5 and 16.1.1.7	18.3.0
2024-06	RAN#104	R5-242883	3143	-	F	Correction to RedCap RRM test case 17.3.1.1 with TT	18.3.0
2024-06	RAN#104	R5-242884	3144	-	F	Correction to RedCap RRM test case 17.3.1.2 with TT	18.3.0
2024-06	RAN#104	R5-242885	3145	-	F	Correction to RedCap RRM test case 17.3.2.3.1 with TT	18.3.0
2024-06	RAN#104	R5-242887	3147	-	F	Correction to RedCap RRM test case 17.4.3.1 with TT	18.3.0
2024-06	RAN#104	R5-242892	3152	-	F	Correction to RedCap RRM test case 17.5.4.1.1 with TT	18.3.0
2024-06	RAN#104	R5-242893	3153	-	F	Correction to RedCap RRM test case 17.5.4.2.1 with TT	18.3.0
2024-06	RAN#104	R5-242895	3155	-	F	Correction to RedCap RRM test case 17.5.5.2.1 with TT	18.3.0
2024-06	RAN#104	R5-242904	3164	-	F	Correction to Annex E for RedCap RRM test cases	18.3.0
2024-06	RAN#104	R5-242979	3167	-	F	Editorial correction of references to TS 38.101-1 in section 7	18.3.0
2024-06	RAN#104	R5-242980	3168	-	F	Editorial correction of references to TS 38.101-1 in section 6.7	18.3.0
2024-06	RAN#104	R5-242981	3169	-	F	Editorial correction of references to TS 38.101-1 in section 6.6	18.3.0
2024-06	RAN#104	R5-242982	3170	-	F	Editorial correction of references to TS 38.101-1 in section 5	18.3.0
2024-06	RAN#104	R5-242983	3171	-	F	Editorial correction of references to TS 38.101-1 in section 4	18.3.0
2024-06	RAN#104	R5-242986	3173	-	F	Editorial correction to title of R17 RedCap test case 16.6.4.7	18.3.0
2024-06	RAN#104	R5-242987	3174	-	F	Test procedure correction for R17 RedCap NCD-SSB test cases	18.3.0
2024-06	RAN#104	R5-242988	3175	-	F	Addition of SA FR1 NR-U RSSI minimum conformance requirements	18.3.0
2024-06	RAN#104	R5-242989	3176	-	F	Addition of SA FR1 NR-U RSSI measurement accuracy test case 11.6.5.3	18.3.0
2024-06	RAN#104	R5-242990	3177	-	F	Addition of SA FR1 NR-U SSB based L1-RSRP measurement test case 11.6.4.1	18.3.0
2024-06	RAN#104	R5-242991	3178	-	F	Addition of SA FR1 NR-U channel occupancy inter-frequency test case 11.6.6.3	18.3.0
2024-06	RAN#104	R5-242992	3179	-	F	Correction to frequencies table for RRM FR2 SA test cases	18.3.0
2024-06	RAN#104	R5-242993	3180	-	F	Corrections to message contents for SA FR2 event triggered intra-frequency test cases	18.3.0
2024-06	RAN#104	R5-242994	3181	-	F	Corrections to message contents for SA FR2 timing test cases	18.3.0
2024-06	RAN#104	R5-243019	3183	-	F	Correction to K1 in 4.6.4.3 and 6.6.4.3 for FDD and TDD SCS 30 kHz	18.3.0
2024-06	RAN#104	R5-243020	3184	-	F	Correction to DCI trigger in 6.6.4.3 for FDD and TDD SCS 15 kHz	18.3.0
2024-06	RAN#104	R5-243025	3186	-	F	Correction to SMTC settings in 16.6.2.9 and 16.6.2.10	18.3.0
2024-06	RAN#104	R5-243095	3187	-	F	Removal of Editors note for applicability of RedCap SS-RSRP test cases	18.3.0
2024-06	RAN#104	R5-243097	3189	-	F	Addition of SA FR1 NR-U channel occupancy intra-frequency test cases	18.3.0
2024-06	RAN#104	R5-243235	3192	-	F	Addition of Clause 4.5.6.4.0 minimum conformance requirements for simultaneous RRC-based active BWP switch on multiple CCs	18.3.0
2024-06	RAN#104	R5-243236	3193	-	F	Addition of Clause 4.6.8.0 minimum conformance requirements for CSI-RS based intra-frequency measurement	18.3.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-06	RAN#104	R5-243237	3194	-	F	Addition of Clause 4.6.9.0 minimum conformance requirements for CSI-RS based inter-frequency measurement	18.3.0
2024-06	RAN#104	R5-243238	3195	-	F	Addition of Clause 5.5.3.0 minimum conformance requirements for SCell activation and deactivation delay	18.3.0
2024-06	RAN#104	R5-243239	3196	-	F	Addition of Clause 5.5.6.5.0 minimum conformance requirements for simultaneous RRC-based active BWP switch on multiple CC	18.3.0
2024-06	RAN#104	R5-243329	3213	-	F	Addition of EN-DC FR1 NR-U Random Access and Handover test cases	18.3.0
2024-06	RAN#104	R5-243341	3216	-	F	Corrections to NR FR1 RedCap E-UTRA cell re-selection TCs 16.1.2.1, 16.1.2.3	18.3.0
2024-06	RAN#104	R5-243342	3217	-	F	Editorial correction in Redcap 16.6.2.1	18.3.0
2024-06	RAN#104	R5-243343	3218	-	F	Correction to FR1 RedCap E-UTRA - NR inter - RAT Handover TC 18.2.1.1	18.3.0
2024-06	RAN#104	R5-243344	3219	-	F	Editorial correction in Annex E for FR1 RedCap TCs 16.6.2.3, 16.6.2.4	18.3.0
2024-06	RAN#104	R5-243359	3220	-	F	Addition of NTN Timing Advance test 14.3.2.1	18.3.0
2024-06	RAN#104	R5-243360	3221	-	F	Addition of NTN distance-based CHO tests 14.2.1.5 and 14.2.1.6	18.3.0
2024-06	RAN#104	R5-243361	3222	-	F	Addition of NTN inter-frequency Measurement Initiation Cell Reselection tests 14.1.7 and 14.1.8	18.3.0
2024-06	RAN#104	R5-243362	3223	-	F	Addition of NTN L1-RSRP Measurement Accuracy tests 14.6.4.1 and 14.6.4.2	18.3.0
2024-06	RAN#104	R5-243363	3224	-	F	Update to NTN general sections	18.3.0
2024-06	RAN#104	R5-243364	3225	-	F	Update to NR-U Cases 10.4.1.1 and 10.4.1.4 including TTs	18.3.0
2024-06	RAN#104	R5-243365	3226	-	F	Update to NR-U Timing Accuracy Test 10.2.1.1 including TTs	18.3.0
2024-06	RAN#104	R5-243366	3227	-	F	Update to NR-U Timing Advance Test 10.2.2.1 including TTs	18.3.0
2024-06	RAN#104	R5-243367	3228	-	F	Update to NR-U L1-RSRP measurement reporting tests 10.4.3.x including TTs	18.3.0
2024-06	RAN#104	R5-243368	3229	-	F	Update to SCell activation and deactivation tests 10.3.3.x including TTs	18.3.0
2024-06	RAN#104	R5-243369	3230	-	F	Addition of NR-U EN-DC PSCell addition and release delay test case including TTs	18.3.0
2024-06	RAN#104	R5-243370	3231	-	F	Addition of NR-U SA FR1 UE transmit timing and timing advance test cases including TTs	18.3.0
2024-06	RAN#104	R5-243371	3232	-	F	Addition of NR-U SA FR1 Scell activation and deactivation test cases including TTs	18.3.0
2024-06	RAN#104	R5-243373	3234	-	F	Removal of interruption during SCell operation NR-U tests	18.3.0
2024-06	RAN#104	R5-243377	3238	-	F	Addition of testing methodology for Shared Spectrum	18.3.0
2024-06	RAN#104	R5-243378	3239	-	F	Clean up of pending items in section 10 NR-U tests	18.3.0
2024-06	RAN#104	R5-243379	3240	-	F	Update to Annex H for NR-U	18.3.0
2024-06	RAN#104	R5-243380	3241	-	F	Clean up of pending items in section 11 NR-U tests	18.3.0
2024-06	RAN#104	R5-243381	3242	-	F	Editorial update to Annex D for NR-U	18.3.0
2024-06	RAN#104	R5-243382	3243	-	F	Update to OCNG modelling for NR-U	18.3.0
2024-06	RAN#104	R5-243384	3245	-	F	Correction to stationary relaxed measurement criterion tests	18.3.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-06	RAN#104	R5-243388	3249	-	F	Editorial correction to section 18 title	18.3.0
2024-06	RAN#104	R5-243391	3252	-	F	Correction to gap-based measurement tests	18.3.0
2024-06	RAN#104	R5-243393	3254	-	F	Correction to Handover tests	18.3.0
2024-06	RAN#104	R5-243703	3190	1	F	Update to Unified TCI state test cases	18.3.0
2024-06	RAN#104	R5-243704	3191	1	F	Correcting propagation AWGN in test cases without Noc	18.3.0
2024-06	RAN#104	R5-243705	3119	1	F	Adding TRP specific Minimum conformance requirements	18.3.0
2024-06	RAN#104	R5-243706	3105	1	F	Correction of FR2 interruptions at SRS carrier based switching test case 5.5.2.7 and 5.5.2.8	18.3.0
2024-06	RAN#104	R5-243707	3121	1	F	Addition of new test case 5.6.7.1 EN-DC event triggered reporting test without gap under non-DRX	18.3.0
2024-06	RAN#104	R5-243708	3122	1	F	Addition of new test case 5.6.8.1 EN-DC event triggered reporting tests for NR FR2 cell when DRX is used	18.3.0
2024-06	RAN#104	R5-243709	3123	1	F	Addition of new test case 5.7.7.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	18.3.0
2024-06	RAN#104	R5-243710	3124	1	F	Addition of new test case 5.7.7.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	18.3.0
2024-06	RAN#104	R5-243711	3250	1	F	Update to gap-based measurement reporting tests for HST	18.3.0
2024-06	RAN#104	R5-243712	3214	1	F	Correction to RRM RedCap TC 16.5.1.7	18.3.0
2024-06	RAN#104	R5-243713	3172	1	F	Corrections to R17 RedCap 18.3.1.x test cases	18.3.0
2024-06	RAN#104	R5-243735	3236	1	F	Update to SA measurement accuracy NR-U tests including TT	18.3.0
2024-06	RAN#104	R5-243744	3097	1	F	Correction to 7.6.15.3 FR2 SA event triggered reporting tests with concurrent gaps including TT	18.3.0
2024-06	RAN#104	R5-243748	3115	1	F	Correction of NR_U SA L1-RSRP measurements test cases	18.3.0
2024-06	RAN#104	R5-243749	3099	1	F	Completion of NR-U redirection from NR FR1 carrier without CCA to NR FR1 carrier under CCA test case including test tolerance	18.3.0
2024-06	RAN#104	R5-243751	3098	1	F	Completion of NR-U redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA test case including test tolerance	18.3.0
2024-06	RAN#104	R5-243754	3103	1	F	Correction of interruptions at NR SRS carrier based switching test case 4.5.2.8 including Test Tolerance	18.3.0
2024-06	RAN#104	R5-243755	3104	1	F	Correction of interruptions at E-UTRA SRS carrier based switching test case 4.5.2.9 including Test Tolerance	18.3.0
2024-06	RAN#104	R5-243756	3106	1	F	Correction of SA FR1 interruptions at NR SRS carrier based switching test case 6.5.2.2 including Test Tolerance	18.3.0
2024-06	RAN#104	R5-243757	3110	1	F	Addition of FR2 SA event triggered reporting test without gap under non-DRX test case 7.6.2.10 including Test Tolerance	18.3.0
2024-06	RAN#104	R5-243758	3111	1	F	Addition of FR2 SA event triggered reporting test without gap under DRX test case 7.6.2.11 including Test Tolerance	18.3.0
2024-06	RAN#104	R5-243774	3146	1	F	Correction to RedCap RRM test case 17.4.1.1 with TT	18.3.0
2024-06	RAN#104	R5-243775	3154	1	F	Correction to RedCap RRM test case 17.5.5.1.1 with TT	18.3.0
2024-06	RAN#104	R5-243776	3156	1	F	Correction to RedCap RRM test case 17.7.1.1 with TT	18.3.0
2024-06	RAN#104	R5-243777	3157	1	F	Correction to RedCap RRM test case 17.7.1.2 with TT	18.3.0
2024-06	RAN#104	R5-243778	3158	1	F	Correction to RedCap RRM test case 17.7.2.1 with TT	18.3.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-06	RAN#104	R5-243779	3159	1	F	Correction to RedCap RRM test case 17.7.2.2 with TT	18.3.0
2024-06	RAN#104	R5-243780	3160	1	F	Correction to RedCap RRM test case 17.7.3.1 with TT	18.3.0
2024-06	RAN#104	R5-243781	3161	1	F	Correction to RedCap RRM test case 17.7.3.2 with TT	18.3.0
2024-06	RAN#104	R5-243782	3162	1	F	Correction to RedCap RRM test case 17.7.4.1 with TT	18.3.0
2024-06	RAN#104	R5-243783	3163	1	F	Addition of RedCap RRM test case 17.7.4.2 with TT	18.3.0
2024-06	RAN#104	R5-243815	3197	1	F	Addition of message contents to test case 4.7.9.1	18.3.0
2024-06	RAN#104	R5-243842	3198	1	F	Addition of message contents to test case 4.7.9.2	18.3.0
2024-06	RAN#104	R5-243843	3199	1	F	Addition of message contents to test case 4.7.10.1	18.3.0
2024-06	RAN#104	R5-243844	3200	1	F	Addition of message contents to test case 4.7.10.2	18.3.0
2024-06	RAN#104	R5-243845	3201	1	F	Addition of message contents to test case 5.7.8.1	18.3.0
2024-06	RAN#104	R5-243846	3202	1	F	Addition of message contents to test case 5.7.8.2	18.3.0
2024-06	RAN#104	R5-243847	3203	1	F	Addition of message contents to test case 5.7.9.1	18.3.0
2024-06	RAN#104	R5-243848	3204	1	F	Addition of message contents to test case 5.7.9.2	18.3.0
2024-06	RAN#104	R5-243849	3205	1	F	Addition of message contents to test case 6.7.11.1	18.3.0
2024-06	RAN#104	R5-243850	3206	1	F	Addition of message contents to test case 6.7.11.2	18.3.0
2024-06	RAN#104	R5-243851	3207	1	F	Addition of message contents to test case 6.7.12.1	18.3.0
2024-06	RAN#104	R5-243852	3208	1	F	Addition of message contents to test case 6.7.12.2	18.3.0
2024-06	RAN#104	R5-243853	3209	1	F	Addition of message contents to test case 7.7.8.1	18.3.0
2024-06	RAN#104	R5-243854	3210	1	F	Addition of message contents to test case 7.7.8.2	18.3.0
2024-06	RAN#104	R5-243855	3211	1	F	Addition of message contents to test case 7.7.9.1	18.3.0
2024-06	RAN#104	R5-243856	3212	1	F	Addition of message contents to test case 7.7.9.2	18.3.0
2024-06	RAN#104	R5-243880	3118	1	F	Addition test case for Inter-cell SSB based L1-RSRP Reporting	18.3.0
2024-06	RAN#104	R5-243892	3237	1	F	Update to NSA event-triggered measurement NR-U tests including TT	18.3.0
2024-06	RAN#104	R5-243901	3251	1	F	Update to Rel.17 HST CA measurement reporting tests	18.3.0
2024-06	RAN#104	R5-243902	3253	1	F	Correction to SUL test cases	18.3.0
2024-06	RAN#104	R5-243903	3247	1	F	Correction to re-establishment test cases for RedCap	18.3.0
2024-06	RAN#104	R5-243904	3244	1	F	Correction to gap-based measurement tests for RedCap	18.3.0
2024-06	RAN#104	R5-243909	3215	1	F	Correction to FR1 NSA Event Trigger TC 4.6.1.8	18.3.0
2024-06	RAN#104	R5-243916	3134	1	F	Correction to R15 RACH RRM test cases and RMCs	18.3.0
2024-06	RAN#104	R5-243917	3135	1	F	Correction to R15 reestablishment RRM test case 6.3.2.1.1	18.3.0
2024-06	RAN#104	R5-243918	3139	1	F	Correction to RedCap RRM test case 16.1.2.5 and 16.1.2.6	18.3.0
2024-06	RAN#104	R5-243919	3255	1	F	Correction to RedCap inter-RAT measurement test cases	18.3.0
2024-06	RAN#104	R5-243994	3233	2	F	Update to Annex E and F for NR-U RRM tests	18.3.0
2024-06	RAN#104	R5-243995	3235	2	F	Update to NSA measurement accuracy NR-U tests including TT	18.3.0
2024-06	RAN#104	R5-244001	3127	1	F	Correction to SDT RRM test case 6.2.1 with TT	18.3.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-06	RAN#104	R5-244002	3125	1	F	Addition of MU and test tolerance in Annex F for Rel-16 RRM test case EN-DC CSI-RSRP measurement accuracy with FR1 serving cell and FR1 target cell	18.3.0
2024-06	RAN#104	R5-244003	3166	2	F	Update of Rel-16 RRM test case EN-DC CSI-RSRP measurement accuracy with FR1 serving cell and FR1 target cell	18.3.0
2024-06	RAN#104	R5-244005	3092	1	F	Addition of TT for MG enhancements TC 6.6.18.3	18.3.0
2024-06	RAN#104	R5-244006	3093	2	F	Addition of TT for MG enhancements TC 6.6.18.4	18.3.0
2024-06	RAN#104	R5-244012	3165	2	F	Correction to Annex F for RedCap RRM test cases	18.3.0
2024-06	RAN#104	R5-244013	3095	2	F	Update test requirement for Redcap inter frequency test cases	18.3.0
2024-06	RAN#104	R5-244014	3140	1	F	Correction to RedCap RRM test case 16.2.1.1 with TT	18.3.0
2024-06	RAN#104	R5-244015	3141	1	F	Correction to RedCap RRM test case 16.2.1.2 with TT	18.3.0
2024-09	RAN#105	R5-244110	3259	-	F	Correction to RedCap RRM - 16.6.1.1 test case	18.4.0
2024-09	RAN#105	R5-244151	3264	-	F	Addition of minimum requirements for FR1 LTM intra L1-RSRP measurement	18.4.0
2024-09	RAN#105	R5-244153	3266	-	F	Addition of minimum requirements for FR1 LTM inter L1-RSRP measurement with GAP	18.4.0
2024-09	RAN#105	R5-244155	3268	-	F	Addition of minimum requirements for FR1 LTM inter L1-RSRP measurement without GAP	18.4.0
2024-09	RAN#105	R5-244157	3270	-	F	Addition of minimum requirements for FR1 LTM inter L1-RSRP measurement accuracy	18.4.0
2024-09	RAN#105	R5-244160	3273	-	F	Addition of new band groups for FR1 LTM L1-RSRP measurement accuracy test cases	18.4.0
2024-09	RAN#105	R5-244161	3274	-	F	Editorial correction of RRC IE used in ReportConfigNR-DEFAULT for LTM L1-RSRP measurement test cases	18.4.0
2024-09	RAN#105	R5-244285	3275	-	F	Addition of minimum requirements for 6.3.4.0 - FR1 LTM Pcell switch	18.4.0
2024-09	RAN#105	R5-244286	3276	-	F	Addition of new test case 6.3.4.1 for FR1 LTM intra-f Rach-based Pcell switch	18.4.0
2024-09	RAN#105	R5-244287	3277	-	F	Addition of new test case 6.3.4.2 for FR1 LTM inter-f Rach-based Pcell switch	18.4.0
2024-09	RAN#105	R5-244288	3278	-	F	Correction to table E.4-1 for LTM FR1 TCs	18.4.0
2024-09	RAN#105	R5-244292	3281	-	F	Addition of LTM Candidate TCI State Configurations to align with core specs	18.4.0
2024-09	RAN#105	R5-244293	3282	-	F	Editorial correction of Redcap inter-RAT CGI test case 16.6.5.4	18.4.0
2024-09	RAN#105	R5-244318	3287	-	F	Correction of Redcap RRM-16.7.4.0.3 and 16.7.4.0.4 CSI-RS L1-RSRP accuracy requirements	18.4.0
2024-09	RAN#105	R5-244334	3288	-	F	Editorial correction of 1Rx RedCap RRM - L1-RSRP measurement for beam reporting	18.4.0
2024-09	RAN#105	R5-244349	3289	-	F	Correction on test requirements in Redcap RLM test cases	18.4.0
2024-09	RAN#105	R5-244350	3290	-	F	Addition of new sub-clause 6.3.2.4.0 for LTM	18.4.0
2024-09	RAN#105	R5-244351	3291	-	F	Addition of new test case 6.3.2.4.1 for LTM	18.4.0
2024-09	RAN#105	R5-244352	3292	-	F	Addition of new test case 6.3.2.4.2 for LTM	18.4.0
2024-09	RAN#105	R5-244353	3293	-	F	Addition of new test case 6.3.2.4.3 for LTM	18.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-09	RAN#105	R5-244361	3294	-	F	Editorial correction to clause 4.5.3.0 and TC 4.5.2.3	18.4.0
2024-09	RAN#105	R5-244390	3295	-	F	Introduction of bands n31 and n72 to NR band group for FR1	18.4.0
2024-09	RAN#105	R5-244549	3296	-	F	Addition of Rel-18 inter-frequency cell reselection HST FR2 test case	18.4.0
2024-09	RAN#105	R5-244550	3297	-	F	Addition of Rel-18 HST FR2 active TCI state switch delay test case	18.4.0
2024-09	RAN#105	R5-244556	3299	-	F	Addition of FR1 intra-frequency handover for less than 5MHz test case	18.4.0
2024-09	RAN#105	R5-244557	3300	-	F	Addition of RLM OOS in DRX mode for UE operating on a cell with less than 5MHz bandwidth test case	18.4.0
2024-09	RAN#105	R5-244558	3301	-	F	Addition of RLM OOS in non-DRX mode for UE operating on a cell with less than 5MHz bandwidth test case	18.4.0
2024-09	RAN#105	R5-244559	3302	-	F	Addition of less than 5 MHz RMC and CORESET RMSI scheduling	18.4.0
2024-09	RAN#105	R5-244562	3303	-	F	Addition of SA FR2 UE Transmit Timing with 2 TAGs for multi-DCI multi-TRP operation test case	18.4.0
2024-09	RAN#105	R5-244565	3306	-	F	Addition of Test Case: TRS based SCell Activation of SSB-less SCell in FR1 inter-band CA in non-DRX	18.4.0
2024-09	RAN#105	R5-244605	3310	-	F	Correction to MCE RRM test case 6.5.7D.1 with TT	18.4.0
2024-09	RAN#105	R5-244606	3311	-	F	Correction to MCE RRM test case 6.5.7D.2 with TT	18.4.0
2024-09	RAN#105	R5-244607	3312	-	F	Correction to MCE RRM test case 6.5.7D.3 with TT	18.4.0
2024-09	RAN#105	R5-244610	3315	-	F	Correction to Annex H for Tx switch RRM test cases	18.4.0
2024-09	RAN#105	R5-244613	3317	-	F	Correction to EN-DC BFR test cases	18.4.0
2024-09	RAN#105	R5-244614	3318	-	F	Correction to NR SA BFR test cases	18.4.0
2024-09	RAN#105	R5-244615	3319	-	F	Correction to NR SA CSI-RS based L1-RSRP test cases	18.4.0
2024-09	RAN#105	R5-244617	3321	-	F	Correction to NR SA RRM test case 7.3.2.1.1	18.4.0
2024-09	RAN#105	R5-244619	3322	-	F	Correction to R16 Tx switch RRM test case 4.5.8.1 with TT	18.4.0
2024-09	RAN#105	R5-244620	3323	-	F	Correction to R16 Tx switch RRM test case 6.5.7.1 with TT	18.4.0
2024-09	RAN#105	R5-244621	3324	-	F	Correction to R16 Tx switch RRM test case 6.5.7.2 with TT	18.4.0
2024-09	RAN#105	R5-244622	3325	-	F	Correction to Annex F for R16 Tx switch RRM test cases	18.4.0
2024-09	RAN#105	R5-244624	3326	-	F	Correction to R17 Tx switch RRM test case 6.5.7A.1 with TT	18.4.0
2024-09	RAN#105	R5-244625	3327	-	F	Correction to R17 Tx switch RRM test case 6.5.7A.2 with TT	18.4.0
2024-09	RAN#105	R5-244626	3328	-	F	Correction to R17 Tx switch RRM test case 6.5.7B.1	18.4.0
2024-09	RAN#105	R5-244627	3329	-	F	Correction to R17 Tx switch RRM test case 6.5.7B.2 with TT	18.4.0
2024-09	RAN#105	R5-244628	3330	-	F	Correction to R17 Tx switch RRM test case 6.5.7C.1	18.4.0
2024-09	RAN#105	R5-244629	3331	-	F	Correction to R17 Tx switch RRM test case 6.5.7C.2 with TT	18.4.0
2024-09	RAN#105	R5-244630	3332	-	F	Correction to Annex F for R17 Tx switch RRM test cases	18.4.0
2024-09	RAN#105	R5-244632	3333	-	F	Correction to RedCap RRM test case 16.1.1.7	18.4.0
2024-09	RAN#105	R5-244633	3334	-	F	Correction to RedCap BFR test cases	18.4.0
2024-09	RAN#105	R5-244634	3335	-	F	Correction to RedCap RRM test case 17.5.1.3 with TT	18.4.0
2024-09	RAN#105	R5-244635	3336	-	F	Correction to RedCap RRM test case 17.5.1.5 with TT	18.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-09	RAN#105	R5-244636	3337	-	F	Correction to RedCap RRM test case 17.5.1.6 with TT	18.4.0
2024-09	RAN#105	R5-244637	3338	-	F	Correction to RedCap RRM test case 17.5.1.7 with TT	18.4.0
2024-09	RAN#105	R5-244638	3339	-	F	Correction to RedCap RRM test case 17.5.1.8 with TT	18.4.0
2024-09	RAN#105	R5-244639	3340	-	F	Correction to RedCap RRM test case 17.5.3.1.1 with TT	18.4.0
2024-09	RAN#105	R5-244640	3341	-	F	Correction to RedCap RRM test case 17.5.3.2.1 with TT	18.4.0
2024-09	RAN#105	R5-244759	3343	-	F	Cell Configuration Mapping for RRM Enhancements Test Cases	18.4.0
2024-09	RAN#105	R5-244769	3351	-	F	Correction of Interruptions at NR SRS Carrier Based Switching Test Case 4.5.2.8	18.4.0
2024-09	RAN#105	R5-244770	3352	-	F	Correction of Interruptions at E-UTRA SRS Carrier Based Switching Test Case 4.5.2.9	18.4.0
2024-09	RAN#105	R5-244771	3353	-	F	Correction of SA FR1 Interruptions at NR SRS Carrier Based Switching Test Case 6.5.2.2	18.4.0
2024-09	RAN#105	R5-244778	3357	-	F	Addition of MU and test tolerance in Annex F for Rel-16 RRM EN-DC event triggered reporting test for NR FR2 cell when DRX is used	18.4.0
2024-09	RAN#105	R5-244781	3359	-	F	Addition of MU and test tolerance in Annex F for Rel-16 RRM EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	18.4.0
2024-09	RAN#105	R5-244784	3361	-	F	Addition of MU and test tolerance in Annex F for Rel-16 RRM EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	18.4.0
2024-09	RAN#105	R5-244810	3362	-	F	Update of FR2 Random Access test cases	18.4.0
2024-09	RAN#105	R5-244832	3364	-	F	Correction to message exception in 16.5.3.1.1 and 16.5.3.2.1	18.4.0
2024-09	RAN#105	R5-244835	3367	-	F	Addition of clarification notes in 16.7.2.1 and 16.7.2.2	18.4.0
2024-09	RAN#105	R5-244836	3368	-	F	Correction to test requirement in 16.7.4.1.1	18.4.0
2024-09	RAN#105	R5-244840	3372	-	F	Editorial correction to 6.7.1.2.2	18.4.0
2024-09	RAN#105	R5-245036	3374	-	F	Typo correction to A3 offset in TC 7.6.1.2	18.4.0
2024-09	RAN#105	R5-245040	3378	-	F	Corrections to msg content of BFD-LR test cases 4.5.5.1,4.5.5.2,5.5.5.1,5.5.5.2,6.5.5.1 and 6.5.5.2	18.4.0
2024-09	RAN#105	R5-245042	3380	-	F	Update to NR-U UE random access tests with PSCell under DL CCA including Test Tolerance	18.4.0
2024-09	RAN#105	R5-245044	3382	-	F	Update to NR-U UE FR1 SA Intra-frequency measurement accuracy on SCC TC 11.6.1.2 including Test Tolerance	18.4.0
2024-09	RAN#105	R5-245074	3384	-	F	Editorial correction of 3GPP style issue	18.4.0
2024-09	RAN#105	R5-245123	3386	-	F	Addition of RRC message content for Further NR mobility enhancements	18.4.0
2024-09	RAN#105	R5-245131	3388	-	F	Correction for new reference SSB configuration	18.4.0
2024-09	RAN#105	R5-245132	3389	-	F	Correction of test configurations and test cases for FeMIMO	18.4.0
2024-09	RAN#105	R5-245242	3395	-	F	Corrections to NRU measurement accuracy test cases	18.4.0
2024-09	RAN#105	R5-245243	3396	-	F	Addition of new test cases for SS-RSRP measurement accuracy for Satellite Access	18.4.0
2024-09	RAN#105	R5-245244	3397	-	F	Addition of new test cases for SS-RSRQ measurement accuracy for Satellite Access	18.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-09	RAN#105	R5-245245	3398	-	F	Editorial corrections to Table 14.0.2-1	18.4.0
2024-09	RAN#105	R5-245248	3401	-	F	Editorial corrections to Initial Conditions for RRM FR2 SA test cases	18.4.0
2024-09	RAN#105	R5-245252	3404	-	F	Correction of MU values for RRM FR2 PC1	18.4.0
2024-09	RAN#105	R5-245267	3405	-	F	Correction of SS-RSRP RedCap test case 16.7.1.4.2 including Test Tolerance	18.4.0
2024-09	RAN#105	R5-245268	3406	-	F	Correction of SS-RSRP RedCap test case 16.7.1.4.1 including Test Tolerance	18.4.0
2024-09	RAN#105	R5-245269	3407	-	F	Correction of SS-RSRP RedCap test case 16.7.1.3.2 including Test Tolerance	18.4.0
2024-09	RAN#105	R5-245272	3410	-	F	Correction of FR2 Event Triggered test cases including TT for PC1	18.4.0
2024-09	RAN#105	R5-245273	3411	-	F	Correction of FR2 Timing Advance test cases including TT for PC1	18.4.0
2024-09	RAN#105	R5-245274	3412	-	F	Correction of FR2 Uplink Timing test cases including TT for PC1	18.4.0
2024-09	RAN#105	R5-245278	3416	-	F	Annex E.14 correction for new RedCap test cases	18.4.0
2024-09	RAN#105	R5-245279	3417	-	F	Annex F correction for RRM FR2 PC1 test cases including Test Tolerance	18.4.0
2024-09	RAN#105	R5-245281	3418	-	F	Correction to Editors Notes in Annex B	18.4.0
2024-09	RAN#105	R5-245316	3419	-	F	Update in 16.7.1.1.1 to align Noc level to TT analysis	18.4.0
2024-09	RAN#105	R5-245318	3420	-	F	Update in 16.7.2.2 to align Noc level	18.4.0
2024-09	RAN#105	R5-245319	3421	-	F	Annex F correction for RedCap test cases including Test Tolerance	18.4.0
2024-09	RAN#105	R5-245333	3422	-	F	Update on 4.6.2.9 DRX configuration	18.4.0
2024-09	RAN#105	R5-245337	3423	-	F	Update on pdcch-DMRS-SCID for NSA FR1 BFR test cases	18.4.0
2024-09	RAN#105	R5-245338	3424	-	F	Update on pdcch-DMRS-SCID for NSA FR2 BFR test cases	18.4.0
2024-09	RAN#105	R5-245346	3427	-	F	Addition of Annex E for NR-NTN test cases	18.4.0
2024-09	RAN#105	R5-245347	3428	-	F	Correction to RRM test 6.6.2.9	18.4.0
2024-09	RAN#105	R5-245349	3430	-	F	Update to SDT test 6.2.1	18.4.0
2024-09	RAN#105	R5-245351	3432	-	F	Core alignment for section 11 tests	18.4.0
2024-09	RAN#105	R5-245352	3433	-	F	Addition of chapter 13 tests on a secondary carrier with CCA	18.4.0
2024-09	RAN#105	R5-245353	3434	-	F	Update to Annex E and F for NR-U tests	18.4.0
2024-09	RAN#105	R5-245354	3435	-	F	Addition of NR-U SA FR1 cell reselection test cases	18.4.0
2024-09	RAN#105	R5-245355	3436	-	F	Addition of NR-U SA FR1 Handover test cases	18.4.0
2024-09	RAN#105	R5-245356	3437	-	F	Addition of NR-U SA FR1 RRC re-establishment test cases	18.4.0
2024-09	RAN#105	R5-245357	3438	-	F	Addition of chapter 12 inter-RAT tests on target carrier with CCA	18.4.0
2024-09	RAN#105	R5-245358	3439	-	F	Update to PSCell HO test 10.1.2 including TT	18.4.0
2024-09	RAN#105	R5-245359	3440	-	F	Addition of NR-U SA FR1 Inter-RAT cell reselection test cases	18.4.0
2024-09	RAN#105	R5-245360	3441	-	F	Editorial corrections to Annex D.7	18.4.0
2024-09	RAN#105	R5-245361	3442	-	F	Core alignment for gap-based FR2 inter-RAT measurement tests	18.4.0
2024-09	RAN#105	R5-245362	3443	-	F	Update to SUL tests including TT	18.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-09	RAN#105	R5-245365	3446	-	F	Update to RedCap SA FR2 SSB BFR test cases 17.5.2.1 and 17.5.2.2 including TT	18.4.0
2024-09	RAN#105	R5-245368	3449	-	F	Update to RedCap 2Rx event-triggered test cases 16.6.3.2 and 16.6.3.4 including TT	18.4.0
2024-09	RAN#105	R5-245369	3450	-	F	Update to Annex F for RedCap event-triggered test cases 16.6.3.x	18.4.0
2024-09	RAN#105	R5-245370	3451	-	F	Correction to RedCap BFR 1Rx test cases 16.5.2.1 and 16.5.2.3	18.4.0
2024-09	RAN#105	R5-245727	3470	1	F	Update of test titles for RedCap UE	18.4.0
2024-09	RAN#105	R5-245731	3308	2	F	Correction to CSI-RS L3 measurement RRM test cases	18.4.0
2024-09	RAN#105	R5-245732	3457	2	F	Update to Clause 5.7.8.1 ENDC and Clause 7.7.8.1 SA intra-frequency CSI-RSRQ measurement accuracy	18.4.0
2024-09	RAN#105	R5-245733	3458	2	F	Update to Clause 5.7.8.2 ENDC and Clause 7.7.8.2 SA inter frequency CSI-RSRQ measurement accuracy	18.4.0
2024-09	RAN#105	R5-245734	3459	2	F	Update to Clause 5.7.9.1 ENDC and Clause 7.7.9.1 SA intra-frequency CSI-SINR measurement accuracy	18.4.0
2024-09	RAN#105	R5-245735	3460	2	F	Update to Clause 5.7.9.2 ENDC and Clause 7.7.9.2 SA inter frequency CSI-SINR measurement accuracy	18.4.0
2024-09	RAN#105	R5-245742	3262	1	F	Correction to FR2 RRM - 5.5.5.5 test case	18.4.0
2024-09	RAN#105	R5-245743	3263	1	F	Correction to FR2 RRM - 7.5.5.5 test case	18.4.0
2024-09	RAN#105	R5-245859	3425	1	F	Addition of NR-NTN RLM test cases 14.4.1.x	18.4.0
2024-09	RAN#105	R5-245860	3426	1	F	Addition of NR-NTN Re-establishment test cases 14.2.2.1.x	18.4.0
2024-09	RAN#105	R5-245880	3307	1	F	Addition of Test Case: NR SA FR1 SSB-less SCell Activation SSB-less inter-band CA based on A-TRS in non-DRX	18.4.0
2024-09	RAN#105	R5-245881	3309	1	F	Correction to Annex D for 8Rx capable UEs	18.4.0
2024-09	RAN#105	R5-245882	3298	1	F	Addition of Test Case: Cell reselection to FR1 intra-frequency NR for UE operating on a cell with less than 5MHz BW	18.4.0
2024-09	RAN#105	R5-245883	3313	1	F	Correction to Annex A for MCE RRM test cases	18.4.0
2024-09	RAN#105	R5-245884	3305	1	F	Annexure A changes for adding SA FR2 UL TCI state switch test case	18.4.0
2024-09	RAN#105	R5-245885	3304	1	F	Addition of NR SA FR2 PCell uplink TCI state switch for two known TCI states test case	18.4.0
2024-09	RAN#105	R5-245886	3265	1	F	Addition of new test case 6.6.26.1 for FR1 LTM intra L1-RSRP measurement	18.4.0
2024-09	RAN#105	R5-245887	3267	1	F	Addition of new test case 6.6.27.1 for FR1 LTM inter L1-RSRP measurement with gap	18.4.0
2024-09	RAN#105	R5-245888	3269	1	F	Addition of new test case 6.6.28.1 for FR1 LTM inter L1-RSRP measurement without gap	18.4.0
2024-09	RAN#105	R5-245889	3271	1	F	Addition of new test case 6.7.17.1.1 for FR1 LTM inter L1-RSRP absolute accuracy	18.4.0
2024-09	RAN#105	R5-245890	3272	1	F	Addition of new test case 6.7.17.1.2 for FR1 LTM inter L1-RSRP relative accuracy	18.4.0
2024-09	RAN#105	R5-245891	3279	1	F	Addition of new test case 6.3.4.3 for FR1 LTM intra-f Rach-less Pcell switch	18.4.0
2024-09	RAN#105	R5-245892	3280	1	F	Update of FR1 and FR2 PRACH configurations to align with core specs	18.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-09	RAN#105	R5-245893	3452	1	F	Add CSI-RS.RRM profiles to 38.533	18.4.0
2024-09	RAN#105	R5-245894	3345	1	F	Introduction of new test case 6.7.10.1.1 CSI-RSRP Intra-frequency Absolute Measurement Accuracy	18.4.0
2024-09	RAN#105	R5-245895	3346	1	F	Introduction of new test case 6.7.10.1.2 CSI-RSRP Intra-frequency Relative Measurement Accuracy	18.4.0
2024-09	RAN#105	R5-245896	3347	1	F	Introduction of new test case 6.7.10.2.1 CSI-RSRP Inter-frequency Absolute Measurement Accuracy	18.4.0
2024-09	RAN#105	R5-245897	3348	1	F	Introduction of new test case 6.7.10.2.2 CSI-RSRP Inter-frequency Relative Measurement Accuracy	18.4.0
2024-09	RAN#105	R5-245898	3349	1	F	Introduction of new test case 7.7.7.1.1 CSI-RSRP Intra-frequency Measurement Accuracy	18.4.0
2024-09	RAN#105	R5-245899	3350	1	F	Introduction of new test case 7.7.7.2.1 NR SA FR1-FR1 CSI-RSRP Measurement Accuracy	18.4.0
2024-09	RAN#105	R5-245900	3344	1	F	Introduction of new test case 5.5.7.1 Addition and Release Delay of NR PSCell	18.4.0
2024-09	RAN#105	R5-245901	3373	1	F	Addition of NR-U UE random access test with PCell under DL CCA	18.4.0
2024-09	RAN#105	R5-245902	3316	1	F	Correction to EN-DC RRM test case 4.5.7.1	18.4.0
2024-09	RAN#105	R5-245903	3444	1	F	Core alignment for r17 HST tests with DRX	18.4.0
2024-09	RAN#105	R5-245906	3402	1	F	Test parameters alignment FR2 Event-Triggered SA 7.6.1.1 to NSA 5.6.1.1	18.4.0
2024-09	RAN#105	R5-245908	3366	1	F	Correction to title of 16.7.1.x	18.4.0
2024-09	RAN#105	R5-245909	3369	1	F	Correction to test requirements in FR1 L1-RSRP absolute measurement for RedCap	18.4.0
2024-09	RAN#105	R5-245910	3370	1	F	Correction to test requirement in 16.3.1.1	18.4.0
2024-09	RAN#105	R5-245911	3371	1	F	Correction to test parameters in 16.3.2.3.1	18.4.0
2024-09	RAN#105	R5-245912	3385	1	F	Update to test case titles to match work plan	18.4.0
2024-09	RAN#105	R5-245930	3356	1	F	Update of Rel-16 RRM test case EN-DC event triggered reporting test when DRX is used	18.4.0
2024-09	RAN#105	R5-245931	3358	1	F	Update of Rel-16 RRM test case EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	18.4.0
2024-09	RAN#105	R5-245932	3360	1	F	Update of Rel-16 RRM test case EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	18.4.0
2024-09	RAN#105	R5-245945	3314	1	F	Correction to Annex F for MCE RRM test cases	18.4.0
2024-09	RAN#105	R5-245952	3413	1	F	Correction of Relative Measurement Accuracy test cases including TT	18.4.0
2024-09	RAN#105	R5-245953	3414	1	F	Correction of Absolute Measurement Accuracy test cases including TT	18.4.0
2024-09	RAN#105	R5-245954	3409	1	F	Correction of FR2 Intra-frequency measurement accuracy test cases including TT for PC1	18.4.0
2024-09	RAN#105	R5-245955	3391	1	F	Update the position of core requirements for test case 7.5.14	18.4.0
2024-09	RAN#105	R5-245956	3342	1	F	Correction to Annex F for RedCap RRM test cases	18.4.0
2024-09	RAN#105	R5-245957	3283	1	F	Correction to Redcap RRM TC 16.6.4.5 and 16.6.4.7_CSI-RS L1 RSRP 1Rx with TT	18.4.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-09	RAN#105	R5-245958	3284	1	F	Correction of Redcap CSI-RS based BFD and LR 16.5.2.5 and 16.5.2.7 test case with Test Tolerance	18.4.0
2024-09	RAN#105	R5-245959	3285	1	F	Correction of 16.7.4.3.1 Redcap CSI-RS based L1-RSRP accuracy for 1RX test case with Test Tolerance	18.4.0
2024-09	RAN#105	R5-245960	3286	1	F	Correction of 16.7.4.3.2 Redcap CSI-RS based L1-RSRP accuracy for 1RX test case with Test Tolerance	18.4.0
2024-09	RAN#105	R5-245961	3377	1	F	Correction to cell2 SS-RSRP for test 1 in TC 16.7.3.1	18.4.0
2024-09	RAN#105	R5-245962	3383	1	F	Update to NR2L FR1 measurement accuracy TC 16.7.5.2	18.4.0
2024-09	RAN#105	R5-245963	3408	1	F	Correction of SS-RSRP RedCap test case 16.7.1.3.1 including Test Tolerance	18.4.0
2024-09	RAN#105	R5-245995	3363	1	F	Correction to CellGroupConfig for Non-Contention Based Random Access	18.4.0
2024-09	RAN#105	R5-246015	3320	1	F	Correction to EN-DC and NR SA CFRA test cases and RMCs	18.4.0
2024-09	RAN#105	R5-246016	3260	1	F	Correction to RedCap RRM - 16.5.4.1 and 16.5.4.2 test cases	18.4.0
2024-09	RAN#105	R5-246017	3261	1	F	Correction to RedCap RRM - 16.6.3.x test case	18.4.0
2024-09	RAN#105	R5-246020	3379	1	F	Update to NR-U ENDC FR1 Channel occupancy measurement on PSCell under DL CCA including Test Tolerance	18.4.0
2024-09	RAN#105	R5-246021	3381	1	F	Update to NR-U ENDC FR1 RSSI measurement accuracy on PSCell under DL CCA including Test Tolerance	18.4.0
2024-09	RAN#105	R5-246022	3431	1	F	Core alignment for section 10 tests	18.4.0
2024-09	RAN#105	R5-246029	3390	1	F	Correction to 6.6.4.6 NR SA FR1 Inter-cell SSB based L1-RSRP measurements on PCell in DRX	18.4.0
2024-09	RAN#105	R5-246045	3445	1	F	Update to r17 HST reselection test 6.1.1.8	18.4.0
2024-09	RAN#105	R5-246046	3375	1	F	Correction to Antenna config in TC 16.6.2.9	18.4.0
2024-09	RAN#105	R5-246053	3448	1	F	Update to RedCap 1Rx event-triggered test cases 16.6.3.1 and 16.6.3.3 including TT	18.4.0
2024-09	RAN#105	R5-246064	3376	1	F	Corrections to BFD-LR test cases 4.5.5.1,4.5.5.2,5.5.5.1,5.5.5.2,6.5.5.1 and 6.5.5.2	18.4.0
2024-12	RAN#106	R5-246172	3472	-	F	Update TT value to LTM intra TC 6.3.2.4.1 and TC 6.3.2.4.3	18.5.0
2024-12	RAN#106	R5-246182	3474	-	F	Update LTM TC 6.6.26.1 including TTs	18.5.0
2024-12	RAN#106	R5-246183	3475	-	F	Update LTM TC 6.6.27.1 including TTs	18.5.0
2024-12	RAN#106	R5-246184	3476	-	F	Update LTM TC 6.6.28.1 including TTs	18.5.0
2024-12	RAN#106	R5-246185	3477	-	F	Update LTM TC 6.7.17.1.1 including TTs	18.5.0
2024-12	RAN#106	R5-246186	3478	-	F	Update Annex F for LTM L1-RSRP test cases including TTs	18.5.0
2024-12	RAN#106	R5-246187	3479	-	F	Update message contents and test applicability for LTM TC 6.6.26.1	18.5.0
2024-12	RAN#106	R5-246188	3480	-	F	Update message contents and test applicability for LTM TC 6.6.27.1	18.5.0
2024-12	RAN#106	R5-246189	3481	-	F	Update message contents and test applicability for LTM TC 6.6.28.1	18.5.0
2024-12	RAN#106	R5-246190	3482	-	F	Update message contents and test applicability for LTM TC 6.7.17.1.1	18.5.0
2024-12	RAN#106	R5-246192	3483	-	F	Update TT to Annex F for LTM PDCCH order TCs	18.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-12	RAN#106	R5-246196	3484	-	F	Update LTM TC 6.3.4.3 including TT	18.5.0
2024-12	RAN#106	R5-246197	3485	-	F	Update LTM TC 6.3.4.1 including TT	18.5.0
2024-12	RAN#106	R5-246198	3486	-	F	Update LTM TC 6.3.4.2 including TT	18.5.0
2024-12	RAN#106	R5-246201	3487	-	F	Correction to LTM test case 6.3.4.3	18.5.0
2024-12	RAN#106	R5-246202	3488	-	F	Update message contents for LTM TC 6.3.4.3	18.5.0
2024-12	RAN#106	R5-246203	3489	-	F	Core alignment for LTM RACHless TC 6.3.4.3	18.5.0
2024-12	RAN#106	R5-246207	3491	-	F	Update message contents for LTM TC 6.3.4.1	18.5.0
2024-12	RAN#106	R5-246208	3492	-	F	Update message contents for LTM TC 6.3.4.2	18.5.0
2024-12	RAN#106	R5-246209	3493	-	F	Correction to RedCap RRM - SS-SINR accuracy requirement for 1RX	18.5.0
2024-12	RAN#106	R5-246311	3494	-	F	Removal of LTM L1-RSRP relative accuracy TC 6.7.17.1.2	18.5.0
2024-12	RAN#106	R5-246320	3496	-	F	Update test requirement for Redcap inter frequency test cases	18.5.0
2024-12	RAN#106	R5-246352	3497	-	F	Correction to TC 6.6.18.3 and 6.6.18.4	18.5.0
2024-12	RAN#106	R5-246393	3498	-	F	Core spec alignment for LTM cell switch TC 6.3.4.1	18.5.0
2024-12	RAN#106	R5-246433	3500	-	F	Update RRC message content for Further NR mobility enhancements	18.5.0
2024-12	RAN#106	R5-246492	3503	-	F	Core spec alignment update to LTM PDCCH order TCs	18.5.0
2024-12	RAN#106	R5-246493	3504	-	F	Update test applicability to clause 6.3.2.4	18.5.0
2024-12	RAN#106	R5-246494	3505	-	F	Update message content to clause 6.3.2.4	18.5.0
2024-12	RAN#106	R5-246495	3506	-	F	Correction to Inter-RAT NR cell re-selection for RedCap including TT	18.5.0
2024-12	RAN#106	R5-246719	3508	-	F	Correction to FR1 NR SA re-establishment RRM test case 6.3.2.1.3	18.5.0
2024-12	RAN#106	R5-246720	3509	-	F	Correction to FR2 NR SA re-establishment RRM test case 7.3.2.1.3 with TT	18.5.0
2024-12	RAN#106	R5-246722	3511	-	F	Correction to Annex F for FR2 RRM test cases	18.5.0
2024-12	RAN#106	R5-246727	3513	-	F	Correction to FR1 NR SA 2-step RACH RRM test cases 6.3.2.2.3 & 6.3.2.2.4 with TT	18.5.0
2024-12	RAN#106	R5-246732	3515	-	F	Correction to RedCap inter-RAT reselection test cases 16.1.2.1 & 16.1.2.2	18.5.0
2024-12	RAN#106	R5-246734	3517	-	F	Correction to RedCap inter-frequency measurement test cases 16.6.2.5 & 16.6.2.6	18.5.0
2024-12	RAN#106	R5-246735	3518	-	F	Correction to FR1 RedCap inter-RAT measurement RRM test cases 16.6.3.X	18.5.0
2024-12	RAN#106	R5-246737	3520	-	F	Correction to FR2 RedCap re-establishment RRM test cases 17.3.2.1.3 with TT	18.5.0
2024-12	RAN#106	R5-246738	3521	-	F	Correction to FR2 RedCap RLM scheduling restriction test case 17.5.1.9 with TT	18.5.0
2024-12	RAN#106	R5-246809	3522	-	F	Test Tolerance , Statistical analysis update and core spec alignment to NR-U FR1 E-UTRAN-NR inter-RAT measurements under CCA	18.5.0
2024-12	RAN#106	R5-246822	3529	-	F	Update to propagation conditions for NR-NTN RLM test cases 14.4.1.x	18.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-12	RAN#106	R5-246823	3530	-	F	Addition of Annex F for NR-NTN test cases	18.5.0
2024-12	RAN#106	R5-246824	3531	-	F	Update to NR-NTN event-triggered reporting test cases 14.5.1.x including TT	18.5.0
2024-12	RAN#106	R5-246825	3532	-	F	Addition of NR-NTN cell reselection test cases 14.1.1 and 14.1.5	18.5.0
2024-12	RAN#106	R5-246826	3533	-	F	Addition of NR-NTN cell reselection enhanced requirement test case 14.1.6	18.5.0
2024-12	RAN#106	R5-246827	3534	-	F	Addition of NR-NTN idle mode relaxed measurement test cases 14.1.9 and 14.1.10	18.5.0
2024-12	RAN#106	R5-246828	3535	-	F	Update to EN-DC 2-step RACH NR-U tests	18.5.0
2024-12	RAN#106	R5-246829	3536	-	F	Addition of NR-U L1-RSRP tests 13.3.3.1 and 13.3.3.2 including TT	18.5.0
2024-12	RAN#106	R5-246830	3537	-	F	Addition of NR-U inter-RAT cell reselection test 12.1.1.1	18.5.0
2024-12	RAN#106	R5-246831	3538	-	F	Addition of NR-U inter-RAT handover test 12.2.1.1	18.5.0
2024-12	RAN#106	R5-246833	3540	-	F	Update to NR-U inter-RAT tests 12.4.2.1, 12.4.2.2, 12.4.2.3 and 12.4.2.4 including TT	18.5.0
2024-12	RAN#106	R5-246834	3541	-	F	Update to NR-U SS-RSRP test 13.4.1.1 including TT	18.5.0
2024-12	RAN#106	R5-246836	3543	-	F	Update to NR-U SS-SINR test 13.4.3.1 including TT	18.5.0
2024-12	RAN#106	R5-246837	3544	-	F	Update to NR-U L1-RSRP test 13.4.4.1 including TT	18.5.0
2024-12	RAN#106	R5-246838	3545	-	F	Update to NR-U RSSI tests 13.4.5.1 and 13.4.5.2 including TT	18.5.0
2024-12	RAN#106	R5-246839	3546	-	F	Update to NR-U channel occupancy tests 13.4.6.1 and 13.4.6.2 including TT	18.5.0
2024-12	RAN#106	R5-246840	3547	-	F	Addition of NR-U SCell activation and deactivation tests 13.2.2.1, 13.2.2.2 and 13.2.2.3 including TT	18.5.0
2024-12	RAN#106	R5-246841	3548	-	F	Addition of NR-U inter-frequency tests 13.3.2.3, 13.3.2.4, 13.3.2.5 and 13.3.2.6 including TT	18.5.0
2024-12	RAN#106	R5-246842	3549	-	F	Addition of NR-U intra-frequency measurement tests 13.3.1.x including TT	18.5.0
2024-12	RAN#106	R5-246843	3550	-	F	Update to Annex F for NR-U test cases	18.5.0
2024-12	RAN#106	R5-246844	3551	-	F	Update to 4-step RACH NR-U test cases including TT	18.5.0
2024-12	RAN#106	R5-246845	3552	-	F	Update to 2-step RACH NR-U test cases including TT	18.5.0
2024-12	RAN#106	R5-246846	3553	-	F	Update to Annex E for NR-U test cases	18.5.0
2024-12	RAN#106	R5-246848	3555	-	F	Update to r17 HST reselection test 6.1.1.8	18.5.0
2024-12	RAN#106	R5-246849	3556	-	F	Clarification on FR2 RLM test cases	18.5.0
2024-12	RAN#106	R5-246881	3557	-	F	Addition of minimum conformance requirements for MUSIM gap configured	18.5.0
2024-12	RAN#106	R5-246882	3558	-	F	Addition of NR SA FR1 event triggered reporting with MUSIM gap configured test case 6.6.1.9	18.5.0
2024-12	RAN#106	R5-246883	3559	-	F	Addition of NR SA FR1-FR1 event triggered reporting using MUSIM gap with lower and higher priority test case 6.6.2.13	18.5.0
2024-12	RAN#106	R5-246884	3560	-	F	Correction to Cell configuration mapping for MUSIM gap test cases	18.5.0
2024-12	RAN#106	R5-246925	3561	-	F	Addition of minimum requirements for NR FR1 NES-based CHO test cases	18.5.0
2024-12	RAN#106	R5-246929	3565	-	F	Correction to test applicability for 6.6.1.2	18.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-12	RAN#106	R5-246954	3566	-	F	Addition of spatial relation configuration to 38.533	18.5.0
2024-12	RAN#106	R5-246955	3567	-	F	Addition of TC4.5.3.4 SCell Activation and deactivation of multiple unknown SCells in FR1 with single activation deactivation command	18.5.0
2024-12	RAN#106	R5-246956	3568	-	F	Addition of TC4.5.6.4.1 E-UTRAN - NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC on multiple CCs	18.5.0
2024-12	RAN#106	R5-246957	3569	-	F	Addition of TC5.5.3.6 Multiple SCell Activation and deactivation of one unknown SCell and one known SCell in FR2	18.5.0
2024-12	RAN#106	R5-246958	3570	-	F	Addition of TC5.5.6.5.1 E-UTRAN - NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs with non-DRX in synchronous EN-DC	18.5.0
2024-12	RAN#106	R5-246959	3571	-	F	Addition of TC7.5.6.5.1 Active BWP switch on multiple SCells with non-DRX in SA	18.5.0
2024-12	RAN#106	R5-246963	3574	-	F	Correct a typo in the title of Annex A.2	18.5.0
2024-12	RAN#106	R5-246976	3575	-	F	Completion of Test Case: Cell reselection to FR1 intra-frequency NR for UE operating on a cell with less than 5MHz BW including TT	18.5.0
2024-12	RAN#106	R5-246978	3577	-	F	Addition of test tolerance for cell reselection and handover test cases when cell is operating in less than 5 MHz	18.5.0
2024-12	RAN#106	R5-246983	3578	-	F	Completion of SA FR2 UE Transmit Timing with 2 TAGs for multi-DCI multi-TRP operation test case including TT	18.5.0
2024-12	RAN#106	R5-246985	3580	-	F	Annex A changes for adding SA FR2 UL TCI state switch test case	18.5.0
2024-12	RAN#106	R5-246986	3581	-	F	Addition of test tolerance for test cases of NR SA FR2 MAC-CE based active uplink TCI state switch and UE Transmit Timing for multi-TRP operation	18.5.0
2024-12	RAN#106	R5-246990	3583	-	F	Update to TRS based SCell Activation of SSB-less SCell in inter-band CA in non-DRX test case	18.5.0
2024-12	RAN#106	R5-247046	3586	-	F	Addition of RRC message content for Further measurement gap enhancements	18.5.0
2024-12	RAN#106	R5-247127	3587	-	F	Correction in Message contents for FR2-FR2 event-triggered reporting in DRX test cases.	18.5.0
2024-12	RAN#106	R5-247128	3588	-	F	Correction A3-Offset for TC 7.6.1.1	18.5.0
2024-12	RAN#106	R5-247186	3589	-	F	Correction to message contents for FR1 SA absolute measurement accuracy	18.5.0
2024-12	RAN#106	R5-247187	3590	-	F	Correction to message contents for BFD-LR 1Rx RedCap test cases	18.5.0
2024-12	RAN#106	R5-247189	3592	-	F	Update of test requirements for RedCap test cases in Annex F	18.5.0
2024-12	RAN#106	R5-247194	3593	-	F	Correction to TDD configuration in RedCap handover test cases	18.5.0
2024-12	RAN#106	R5-247195	3594	-	F	Correction to CORESET Reference Channel in 16.3.2.3.1	18.5.0
2024-12	RAN#106	R5-247197	3596	-	F	Correction to general test parameters of active BWP switch delay for RedCap	18.5.0
2024-12	RAN#106	R5-247198	3597	-	F	Correction to Active BWP Dedicated CORESET RMC in 16.6.1.7	18.5.0
2024-12	RAN#106	R5-247264	3598	-	F	Introduction of band n254 to NR band group for FR1	18.5.0
2024-12	RAN#106	R5-247284	3599	-	F	Addition of new test cases for SSB based L1-RSRP measurement for Satellite Access	18.5.0
2024-12	RAN#106	R5-247292	3603	-	F	Editorial corrections to Annex F.1.1.2	18.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-12	RAN#106	R5-247293	3604	-	F	Correction of Table H.3.1-10 BeamFailureRecoveryConfig	18.5.0
2024-12	RAN#106	R5-247295	3606	-	F	Core spec alignment for SMTC FR2 patterns	18.5.0
2024-12	RAN#106	R5-247298	3609	-	F	Editors note removal for RedCap test case 16.6.5.1	18.5.0
2024-12	RAN#106	R5-247299	3610	-	F	Alignment of FR1 RedCap L1-RSRP absolute measurement test cases to TT analysis	18.5.0
2024-12	RAN#106	R5-247437	3619	-	F	Correction to EN-DC FR2 event triggered reporting TCs 5.6.1.2, 5.6.1.4	18.5.0
2024-12	RAN#106	R5-247440	3622	-	F	Correction to E-UTRA event-triggered reporting of a NR FR2 neighbour cell TC 8.4.2.5	18.5.0
2024-12	RAN#106	R5-247442	3623	-	F	Correction to NR FR1 RedCap Cell reselection TC 16.1.1.2	18.5.0
2024-12	RAN#106	R5-247472	3643	-	F	Introduction of NR SA FR2-FR1 inter-frequency NES triggering conditional handover test case 7.3.3.4	18.5.0
2024-12	RAN#106	R5-247473	3644	-	F	Correction of Annex E for NES HO test cases	18.5.0
2024-12	RAN#106	R5-247474	3645	-	F	Correction of Annex E for NR mobility enhancements test cases	18.5.0
2024-12	RAN#106	R5-247475	3646	-	F	Introduction of RACH-based intra-frequency LTM PSCell switch from FR1 to FR1 test case 6.3.5.1	18.5.0
2024-12	RAN#106	R5-247476	3647	-	F	Introduction of RACH-based Intra-frequency LTM PSCell switch from FR2 to FR2 test case 7.3.5.1	18.5.0
2024-12	RAN#106	R5-247488	3651	-	F	Introduction of Intra-frequency SSB based L1-RSRP measurement in FR2 7.6.22.1	18.5.0
2024-12	RAN#106	R5-247509	3652	-	F	Update to Annex B for NR-U test cases	18.5.0
2024-12	RAN#106	R5-247685	3507	2	F	Correction to FR2 EN-DC RLM measurement restriction test case 5.5.1.9 with TT	18.5.0
2024-12	RAN#106	R5-247686	3510	2	F	Correction to FR2 NR SA RLM measurement restriction test case 7.5.1.9 with TT	18.5.0
2024-12	RAN#106	R5-247687	3595	1	F	Addition of CORESET RMC for RLM 1Rx RedCap test cases	18.5.0
2024-12	RAN#106	R5-247807	3584	1	F	Update to NR SA FR1 SSB-less SCell Activation SSB-less inter-band CA based on A-TRS in non-DRX test case	18.5.0
2024-12	RAN#106	R5-247808	3642	1	F	Introduction of NR SA FR2 intra-frequency NES triggering conditional handover test case 7.3.3.3	18.5.0
2024-12	RAN#106	R5-247809	3490	1	F	Addition of new test case 6.3.4.4 for FR1 LTM intra-f Rach-less Pcell switch without L1-RSRP measurement	18.5.0
2024-12	RAN#106	R5-247810	3499	1	F	Core spec alignment for LTM cell switch TC 6.3.4.2	18.5.0
2024-12	RAN#106	R5-247811	3539	1	F	General maintenance for NR-U chapter 10	18.5.0
2024-12	RAN#106	R5-247813	3620	1	F	Correction to EN-DC FR2 Inter-frequency measurements TCs 5.6.2.2 and 5.6.2.4	18.5.0
2024-12	RAN#106	R5-247814	3607	1	F	Corrections to spec implementation, including editorial corrections	18.5.0
2024-12	RAN#106	R5-247815	3608	1	F	Correction for RRM FR2 SS-RSRP measurement accuracy test cases for PC1	18.5.0
2024-12	RAN#106	R5-247836	3562	1	F	Addition of new test case 6.3.3.6 NR FR1 intra-frequency NES-based CHO->>ok!	18.5.0
2024-12	RAN#106	R5-247863	3527	1	F	Test Tolerance update to NR-U FR1 handover tests under CCA	18.5.0
2024-12	RAN#106	R5-247864	3528	1	F	Test Tolerance update to NR-U FR1 RRC Re-establishment with CCA tests and addition of TC 11.2.2.1.3	18.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-12	RAN#106	R5-247865	3601	1	F	Corrections to NRU SS-SINR measurement accuracy test cases including TT	18.5.0
2024-12	RAN#106	R5-247866	3625	1	F	Correction of SA FR1 event-triggered reporting on PCC without gaps under non-DRX test case 11.5.1.1 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247867	3626	1	F	Correction of SA FR1 event-triggered reporting on PCC without gaps under DRX test case 11.5.1.2 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247879	3615	1	F	Addition beam failure and link recovery TC 14.4.2.1	18.5.0
2024-12	RAN#106	R5-247880	3616	1	F	Addition beam failure and link recovery TC 14.4.2.2	18.5.0
2024-12	RAN#106	R5-247881	3617	1	F	Addition beam failure and link recovery TC 14.4.2.3	18.5.0
2024-12	RAN#106	R5-247882	3624	1	F	Annex F update including TT analysis for NR-NTN BFR test cases	18.5.0
2024-12	RAN#106	R5-247885	3649	1	F	Correction of EN-DC FR2 Addition and Release Delay of NR PSCell test case 5.5.7.1 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247886	3650	1	F	Annex F correction for RRM enh TC 5.5.7.1	18.5.0
2024-12	RAN#106	R5-247901	3576	1	F	Completion of FR1 intra-frequency handover for less than 5MHz test case including TT	18.5.0
2024-12	RAN#106	R5-247904	3579	1	F	Completion of NR SA FR2 PCell uplink TCI state switch for two known TCI states test case including TT	18.5.0
2024-12	RAN#106	R5-247907	3471	1	F	Correction of FR2 Event Triggered test cases including TT for PC1	18.5.0
2024-12	RAN#106	R5-247908	3613	1	F	Annex F correction for RRM FR2 PC1 test cases including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247920	3563	1	F	Addition of new test case 6.3.3.7 NR FR1 inter-frequency NES-based CHO	18.5.0
2024-12	RAN#106	R5-247921	3564	1	F	Addition of new test case 6.6.1.13 under Cell DTX	18.5.0
2024-12	RAN#106	R5-247933	3572	1	F	Addition of three TDD UL DL configurations in A.1.5	18.5.0
2024-12	RAN#106	R5-247934	3573	1	F	TCs titles alignment with RAN4 specification	18.5.0
2024-12	RAN#106	R5-247943	3501	1	F	Update of RRM TC titles for RedCap UE	18.5.0
2024-12	RAN#106	R5-247945	3618	1	F	Addition beam failure and link recovery TC 14.4.2.4	18.5.0
2024-12	RAN#106	R5-247946	3542	1	F	Update to NR-U SS-RSRQ test 13.4.2.1 including TT	18.5.0
2024-12	RAN#106	R5-247947	3600	1	F	Corrections to NRU SS-RSRQ measurement accuracy test cases including TT	18.5.0
2024-12	RAN#106	R5-247948	3627	1	F	Correction of NR SA FR1 Event triggered reporting for FR1 with CCA without SSB time index detection when DRX is not used test case 11.5.2.3 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247949	3628	1	F	Correction of NR SA FR1 Event triggered reporting for FR1 with CCA without SSB time index detection when DRX is used test case 11.5.2.4 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247950	3629	1	F	Correction of NR SA FR1 Event triggered reporting for FR1 with CCA with SSB time index detection when DRX is not used test case 11.5.2.5 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247951	3630	1	F	Correction of NR SA FR1 Event triggered reporting for FR1 with CCA with SSB time index detection when DRX is used test case 11.5.2.6 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247952	3631	1	F	Correction of NR SA FR1 Event triggered reporting for FR1 without SSB time index detection when DRX is not used test case 11.5.2.7 including Test Tolerance	18.5.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-12	RAN#106	R5-247953	3632	1	F	Correction of NR SA FR1 Event triggered reporting for FR1 without SSB time index detection when DRX is used test case 11.5.2.8 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247954	3633	1	F	Correction of NR SA FR1 Event triggered reporting for FR1 with SSB time index detection when DRX is not used test case 11.5.2.9 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247955	3634	1	F	Correction of NR SA FR1 Event triggered reporting for FR1 with SSB time index detection when DRX is used test case 11.5.2.10 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247956	3635	1	F	Correction of NR SA FR1 - E-UTRAN event-triggered reporting in non-DRX test case 11.5.3.1 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247957	3636	1	F	Correction of NR SA FR1 - E-UTRAN event-triggered reporting in DRX test case 11.5.3.2 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247958	3637	1	F	Correction of NR SA FR1 SSB based L1-RSRP measurement when DRX is not used test case 11.5.4.1 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247959	3638	1	F	Correction of NR SA FR1 SSB based L1-RSRP measurement when DRX is used test case 11.5.4.2 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247960	3639	1	F	Correction of NR SA FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is not used test case 11.5.4.3 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247961	3640	1	F	Correction of NR SA FR1 SSB based L1-RSRP measurement on SCC under CCA when DRX is used test case 11.5.4.4 including Test Tolerance	18.5.0
2024-12	RAN#106	R5-247962	3641	1	F	Correction of Annex F for SA NRU measurement test cases including test tolerance	18.5.0
2024-12	RAN#106	R5-247976	3612	1	F	Correction of FR2 re-selection test case 7.1.1.1 including TT for PC1	18.5.0
2024-12	RAN#106	R5-247980	3473	1	F	Update TT value to LTM inter TC 6.3.2.4.2	18.5.0
2024-12	RAN#106	R5-247984	3582	1	F	Addition of EN-DC FR1 Inter-band SSB-less Scell activation using A-TRS test case	18.5.0
2024-12	RAN#106	R5-247985	3523	1	F	Test Tolerance update to NR-U FR1 cell reselection with both NR carrier under CCA	18.5.0
2024-12	RAN#106	R5-247986	3524	1	F	Test Tolerance update to NR-U FR1 cell reselection with source NR carrier under CCA	18.5.0
2024-12	RAN#106	R5-247987	3525	1	F	Test Tolerance update to NR-U FR1 cell reselection with target NR carrier under CCA	18.5.0
2024-12	RAN#106	R5-247988	3526	1	F	Test Tolerance update to NR-U FR1 cell reselection to E-UTRAN target cell tests	18.5.0
2024-12	RAN#106	R5-247998	3512	1	F	Correction to FR1 EN-DC 2-step RACH RRM test cases 4.3.2.2.3 & 4.3.2.2.4 with TT	18.5.0
2024-12	RAN#106	R5-248001	3514	1	F	Correction to Annex A for Rel-16 2-step RACH RRM test cases	18.5.0
2024-12	RAN#106	R5-248002	3516	1	F	Correction to FR1 RedCap 2-step RACH RRM test cases 16.3.2.2.X with TT	18.5.0
2025-03	RAN#107	R5-250047	3653	-	F	Addition of minimum requirements for FR2 LTM intra L1-RSRP measurement	18.6.0
2024-03	RAN#107	R5-250048	3654	-	F	Addition of new test case 7.6.20.1 for FR2 LTM intra L1-RSRP measurement	18.6.0
2024-03	RAN#107	R5-250049	3655	-	F	Addition of minimum requirements for FR2 LTM inter L1-RSRP measurement with gap	18.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#107	R5-250051	3657	-	F	Addition of minimum requirements for FR2 LTM inter L1-RSRP measurement accuracy	18.6.0
2024-03	RAN#107	R5-250052	3658	-	F	Addition of new test case 7.7.15.1 for FR1 LTM inter L1-RSRP measurement accuracy	18.6.0
2024-03	RAN#107	R5-250053	3659	-	F	Addition of cell mapping for FR2 LTM L1-RSRP test cases	18.6.0
2024-03	RAN#107	R5-250054	3660	-	F	Deletion of 6.7.17.1.2 from cell mapping table	18.6.0
2024-03	RAN#107	R5-250055	3661	-	F	Editorial corrections of FR1 LTM test cases title	18.6.0
2024-03	RAN#107	R5-250058	3662	-	F	Addition of minimum requirements for E-UTRAN event-triggered without measurement gaps	18.6.0
2024-03	RAN#107	R5-250059	3663	-	F	Addition of new test case 6.6.25.1 for E-UTRAN event-triggered without gap without interruption	18.6.0
2024-03	RAN#107	R5-250060	3664	-	F	Editorial corrections of 7.6.4.1 and 7.6.4.2	18.6.0
2024-03	RAN#107	R5-250061	3665	-	F	Editorial corrections of 7.7.1.2 and 7.7.4.1	18.6.0
2024-03	RAN#107	R5-250161	3666	-	F	Update to RRC IEs of Further NR mobility enhancements	18.6.0
2024-03	RAN#107	R5-250166	3667	-	F	Update to LTM RRM Clause 6.3.2.4	18.6.0
2024-03	RAN#107	R5-250264	3670	-	F	Addition of minimum requirements for FR1 NR needforgap	18.6.0
2024-03	RAN#107	R5-250265	3671	-	F	Addition of new test case 6.6.24.1 for FR1 NR needforgap	18.6.0
2024-03	RAN#107	R5-250266	3672	-	F	Addition of new test case 6.6.24.2 for FR1 NR needforgap	18.6.0
2024-03	RAN#107	R5-250267	3673	-	F	Addition of new test case 6.6.24.3 for FR1 NR needforgap	18.6.0
2024-03	RAN#107	R5-250269	3675	-	F	Addition of new test case 6.6.24.5 for FR1 NR needforgap	18.6.0
2024-03	RAN#107	R5-250271	3676	-	F	Addition of cell mapping for measurement gap enhancements test cases	18.6.0
2024-03	RAN#107	R5-250397	3677	-	F	Update RRC message content for Further NR mobility enhancements	18.6.0
2024-03	RAN#107	R5-250398	3678	-	F	Update to LTM TC 6.3.4.4 including TT	18.6.0
2024-03	RAN#107	R5-250403	3679	-	F	Correction to FR1 LTM PCell Switch test case	18.6.0
2024-03	RAN#107	R5-250406	3680	-	F	Update the cell configuration mapping for FR1 LTM test case 6.3.4.4	18.6.0
2024-03	RAN#107	R5-250480	3683	-	F	Update to Annexure to address less than 5 MHz test cases	18.6.0
2024-03	RAN#107	R5-250486	3688	-	F	Annex F changes to include test tolerance for A-TRS based SSB-less SCell activation test cases	18.6.0
2024-03	RAN#107	R5-250489	3689	-	F	Addition of NR-DC SA FR1 conditional handover including target MCG and target SCG test case	18.6.0
2024-03	RAN#107	R5-250490	3690	-	F	Addition of NR-DC SA FR1 conditional handover including target MCG and candidate SCG test case	18.6.0
2024-03	RAN#107	R5-250496	3696	-	F	Addition of multiple AoA test setups for multiRx test cases	18.6.0
2024-03	RAN#107	R5-250531	3701	-	F	Addition of new test case 6.6.2.15 for inter-frequency event triggered reporting without SSB index detection in DRX mode with less than 5MHz bandwidth	18.6.0
2024-03	RAN#107	R5-250596	3705	-	F	Correction to TC4.5.6.4.1 with TT	18.6.0
2024-03	RAN#107	R5-250600	3707	-	F	Modification to Annex F for test cases 4.5.3.4, 4.5.6.3.1, 4.5.6.4.1, 4.6.6.1	18.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#107	R5-250668	3708	-	F	Clarification to Non-Contention Based Random Access TCs	18.6.0
2024-03	RAN#107	R5-250670	3709	-	F	Correction to RRC_connection release with redirection for RedCap TC 18.2.2.1	18.6.0
2024-03	RAN#107	R5-250671	3710	-	F	Clarification on NCD-SSB absolute frequency definition	18.6.0
2024-03	RAN#107	R5-250687	3713	-	F	Addition of ATG RRM test case 19.6.1.1.2 - intra freq SS RSRP relative accuracy	18.6.0
2024-03	RAN#107	R5-250688	3714	-	F	Addition of ATG RRM test case 19.6.1.2.1 - inter freq SS RSRP absolute accuracy	18.6.0
2024-03	RAN#107	R5-250689	3715	-	F	Addition of ATG RRM test case 19.6.1.2.2 - inter freq SS RSRP relative accuracy	18.6.0
2024-03	RAN#107	R5-250690	3716	-	F	Addition of ATG RRM test case 19.6.2.1 - intra freq SS RSRQ absolute accuracy	18.6.0
2024-03	RAN#107	R5-250691	3717	-	F	Addition of ATG RRM test case 19.6.2.2.1 - inter freq SS RSRQ absolute accuracy	18.6.0
2024-03	RAN#107	R5-250692	3718	-	F	Addition of ATG RRM test case 19.6.2.2.2 - inter freq SS RSRQ relative accuracy	18.6.0
2024-03	RAN#107	R5-250693	3719	-	F	Addition of ATG RRM test case 19.6.3.1 - intra freq SS SINR absolute accuracy	18.6.0
2024-03	RAN#107	R5-250694	3720	-	F	Addition of ATG RRM test case 19.6.3.2.1 - inter freq SS SINR absolute accuracy	18.6.0
2024-03	RAN#107	R5-250695	3721	-	F	Addition of ATG RRM test case 19.6.3.2.2 - inter freq SS SINR relative accuracy	18.6.0
2024-03	RAN#107	R5-250696	3722	-	F	Addition of ATG RRM test case 19.6.4.1.1 - SSB L1 RSRP absolute accuracy	18.6.0
2024-03	RAN#107	R5-250697	3723	-	F	Addition of ATG RRM test case 19.6.4.1.2 - SSB L1 RSRP relative accuracy	18.6.0
2024-03	RAN#107	R5-250698	3724	-	F	Addition of ATG RRM test case 19.6.4.2.1 - CSIRS L1 RSRP absolute accuracy	18.6.0
2024-03	RAN#107	R5-250699	3725	-	F	Addition of ATG RRM test case 19.6.4.2.2 - CSIRS L1 RSRP relative accuracy	18.6.0
2024-03	RAN#107	R5-250700	3726	-	F	Addition of ATG RRM test case 19.6.5.1.1 - CSIRS L1 SINR absolute accuracy no dedicated IMR	18.6.0
2024-03	RAN#107	R5-250701	3727	-	F	Addition of ATG RRM test case 19.6.5.1.2 - CSIRS L1 SINR relative accuracy no dedicated IMR	18.6.0
2024-03	RAN#107	R5-250702	3728	-	F	Addition of ATG RRM test case 19.6.5.2 - SSB L1 SINR absolute accuracy dedicated IMR	18.6.0
2024-03	RAN#107	R5-250703	3729	-	F	Addition of ATG RRM test case 19.6.5.3.1 - CSIRS L1 SINR absolute accuracy dedicated IMR	18.6.0
2024-03	RAN#107	R5-250704	3730	-	F	Addition of ATG RRM test case 19.6.5.3.2 - CSIRS L1 SINR relative accuracy dedicated IMR	18.6.0
2024-03	RAN#107	R5-250706	3732	-	F	Correction to Rel-18 UL Tx switching RRM test cases	18.6.0
2024-03	RAN#107	R5-250711	3735	-	F	Correction to Rel-16 UL Tx switching RRM test cases	18.6.0
2024-03	RAN#107	R5-250712	3736	-	F	Correction to Annex H for UL Tx switching RRM test cases	18.6.0
2024-03	RAN#107	R5-250715	3739	-	F	Correction to RedCap RRM test cases 16.1.1.1 and 16.1.1.5 with TT	18.6.0
2024-03	RAN#107	R5-250716	3740	-	F	Correction to RedCap RRM test cases 16.3.1.1 with TT	18.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#107	R5-250717	3741	-	F	Correction to Annex F for RedCap RRM test cases	18.6.0
2024-03	RAN#107	R5-250725	3742	-	F	Editorial Correction to NR SA FR1-FR1 Handover Test Case	18.6.0
2024-03	RAN#107	R5-250726	3743	-	F	Editorial Correction to NR SA FR1 handover	18.6.0
2024-03	RAN#107	R5-250727	3744	-	F	Editorial Correction to NR SA FR1 NES handover	18.6.0
2024-03	RAN#107	R5-250767	3749	-	F	Correction to NR SA FR1 event triggered reporting with MUSIM gap configured test case 6.6.1.9 with Message contents	18.6.0
2024-03	RAN#107	R5-250768	3750	-	F	Correction to NR SA FR1-FR1 event triggered reporting using MUSIM gap with lower and higher priority test case 6.6.2.13 with message contents	18.6.0
2024-03	RAN#107	R5-250769	3751	-	F	Addition of NR SA FR1-FR1 event triggered reporting using MUSIM gap with shorter MGRP test case 6.6.2.14	18.6.0
2024-03	RAN#107	R5-250770	3752	-	F	Addition of NR SA FR2-FR2 event triggered reporting using MUSIM gap with higher priority test case 7.6.2.20	18.6.0
2024-03	RAN#107	R5-250771	3753	-	F	Addition of NR SA FR2-FR2 event triggered reporting using MUSIM gap with shorter MGRP test case 7.6.2.21	18.6.0
2024-03	RAN#107	R5-250772	3754	-	F	Correction to Cell configuration mapping for MUSIM gap test cases	18.6.0
2024-03	RAN#107	R5-250773	3755	-	F	Correction of minimum conformance requirements for MUSIM gap configured	18.6.0
2024-03	RAN#107	R5-250778	3758	-	F	Addition of TDCP amplitude measurement accuracy EN-DC test case	18.6.0
2024-03	RAN#107	R5-250779	3759	-	F	Addition of TDCP amplitude measurement accuracy SA test case	18.6.0
2024-03	RAN#107	R5-250810	3760	-	F	Addition of new test case 4.5.3.11 SCell activation of SSB-less Cell	18.6.0
2024-03	RAN#107	R5-250812	3762	-	F	Addition of new test case 6.3.3.7 NES-based conditional handover	18.6.0
2024-03	RAN#107	R5-250825	3764	-	F	Correction to Annex E for MCE RRM test case	18.6.0
2024-03	RAN#107	R5-250921	3770	-	F	Addition of new test cases for CSI-RS based L1-RSRP measurement for Satellite Access	18.6.0
2024-03	RAN#107	R5-250922	3771	-	F	Applicability update for L1-RSRP and L3 measurement accuracy test cases for SAN	18.6.0
2024-03	RAN#107	R5-250923	3772	-	F	Message content alignment for RRM FR2 Rel-15 test case 7.6.1.1.	18.6.0
2024-03	RAN#107	R5-250925	3774	-	F	Editorial corrections to measurement procedures minimum conformance requirements	18.6.0
2024-03	RAN#107	R5-250927	3776	-	F	Completion of RRM NRU channel occupancy measurement accuracy test cases	18.6.0
2024-03	RAN#107	R5-250928	3777	-	F	Update of RRM NRU inter-frequency measurement accuracy test cases	18.6.0
2024-03	RAN#107	R5-250929	3778	-	F	Completion of RRM NRU RSSI measurement accuracy test cases	18.6.0
2024-03	RAN#107	R5-250959	3780	-	F	Correction to message exception of RLM 1Rx test cases for RedCap	18.6.0
2024-03	RAN#107	R5-250961	3782	-	F	Correction to test requirements for RedCap random access test cases in Annex F	18.6.0
2024-03	RAN#107	R5-250962	3783	-	F	Core spec alignment for SMTC config of TC 16.6.1.10	18.6.0
2024-03	RAN#107	R5-250997	3784	-	F	Modification of Annex H.3.1 to include a new table for RACH-ConfigCommon to be used for BFR TCs	18.6.0
2024-03	RAN#107	R5-250998	3785	-	F	Correction to Beam Failure detection and link recovery TCs	18.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#107	R5-251001	3786	-	F	Cell configuration mapping for MG enhancement test cases	18.6.0
2024-03	RAN#107	R5-251002	3787	-	F	Addition of Minimum conformance requirements for event-triggered reporting test cases	18.6.0
2024-03	RAN#107	R5-251003	3788	-	F	Addition of NR SA FR2 and FR2-FR2 event-triggered reporting with concurrent Type-2 measurement gap and Pre-MG test case 7.6.17.1	18.6.0
2024-03	RAN#107	R5-251004	3789	-	F	Addition of NR SA FR2-FR2 event-triggered reporting with two concurrent Pre-MGs test case 7.6.17.2	18.6.0
2024-03	RAN#107	R5-251007	3792	-	F	Addition of NR SA FR2-FR2 SA event triggered reporting test without gap without interruption test case 7.6.19.1	18.6.0
2024-03	RAN#107	R5-251008	3793	-	F	Addition of NR SA FR2-event triggered reporting test without gap without interruption under non-DRX test case 7.6.19.2	18.6.0
2024-03	RAN#107	R5-251009	3794	-	F	Addition of E-UTRAN - NR SA FR2 event-triggered reporting without gap with interruption test case 7.6.19.3	18.6.0
2024-03	RAN#107	R5-251012	3795	-	F	Correction of NR SA FR2 Inter-frequency SSB based L1-RSRP measurement without measurement gap test case 7.6.22.1	18.6.0
2024-03	RAN#107	R5-251020	3802	-	F	Minimum conformance requirements correction for NR SA FR2 NES triggering conditional handover test cases	18.6.0
2024-03	RAN#107	R5-251032	3805	-	F	Addition of E-UTRAN - NR SA FR2 event-triggered reporting without gap with interruption test case 8.4.3.1	18.6.0
2024-03	RAN#107	R5-251040	3806	-	F	Correction of RRM propagation conditions for RLM RedCap FR2 test cases with fading	18.6.0
2024-03	RAN#107	R5-251041	3807	-	F	Corrections of RRM propagation conditions for RLM Rel-15 FR2 test cases with fading	18.6.0
2024-03	RAN#107	R5-251042	3808	-	F	Completion of RRM NRU L1-RSRP test case 11.6.4.1	18.6.0
2024-03	RAN#107	R5-251105	3810	-	F	Corrections in 16.7.1.3 and 16.7.1.4 on derived parameters	18.6.0
2024-03	RAN#107	R5-251106	3811	-	F	Corrections in TCs 4.7.1.2 and 6.7.1.2 on derived parameters	18.6.0
2024-03	RAN#107	R5-251154	3815	-	F	Update to NR-NTN SSB based L1-RSRP Measurement Accuracy test cases 14.6.4.1 and 14.6.4.2 including TT	18.6.0
2024-03	RAN#107	R5-251155	3816	-	F	Update to NR-NTN SS-SINR Measurement Accuracy test cases 14.6.3.1 and 14.6.3.2 including TT	18.6.0
2024-03	RAN#107	R5-251156	3817	-	F	Correction in RedCap CSI-RS based L1-RSRP measurement test case 16.6.4.5	18.6.0
2024-03	RAN#107	R5-251158	3819	-	F	Update to TE connection diagram for RedCap 2RX PRACH test cases 16.3.2.2.x	18.6.0
2024-03	RAN#107	R5-251159	3820	-	F	Update to TE and UE connection diagram for PRACH test cases 6.3.2.2.x	18.6.0
2024-03	RAN#107	R5-251160	3821	-	F	Update to RedCap 4-step RA type PRACH test cases 16.3.2.2.x	18.6.0
2024-03	RAN#107	R5-251163	3822	-	F	Addition of NR-NTN DCI-based BWP switch test case 14.4.3.1.1	18.6.0
2024-03	RAN#107	R5-251164	3823	-	F	Addition of NR-NTN RRC-based BWP switch test case 14.4.3.2.1	18.6.0
2024-03	RAN#107	R5-251165	3824	-	F	Addition of NR-NTN CBW change test case 14.4.4.1	18.6.0
2024-03	RAN#107	R5-251167	3826	-	F	Update to NR-NTN two-gap inter-frequency test cases 14.5.2.4 and 14.5.2.6 including TT	18.6.0
2024-03	RAN#107	R5-251170	3829	-	F	Addition of NR-NTN intra-frequency Handover test case 14.2.1.1	18.6.0
2024-03	RAN#107	R5-251174	3833	-	F	Update to NR-NTN intra-frequency test cases 14.5.1.x	18.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#107	R5-251175	3834	-	F	Update to NR-NTN two-gap intra-frequency test cases 14.5.1.5 and 14.5.1.6	18.6.0
2024-03	RAN#107	R5-251177	3836	-	F	General corrections for NR-U RRM	18.6.0
2024-03	RAN#107	R5-251178	3837	-	F	Addition of NR-U SFTD measurement test 12.4.1.1	18.6.0
2024-03	RAN#107	R5-251179	3838	-	F	Addition of NR-U SFTD measurement test 12.5.1.1	18.6.0
2024-03	RAN#107	R5-251180	3839	-	F	Update to RSSI and Channel Occupancy tests	18.6.0
2024-03	RAN#107	R5-251181	3840	-	F	Update to Annex E for NR-U test cases	18.6.0
2024-03	RAN#107	R5-251186	3845	-	F	Update to applicability statement of RRM tests 16.6.2.9 and 16.6.2.10	18.6.0
2024-03	RAN#107	R5-251187	3846	-	F	Correction to RedCap test cases configuring NCD-SSB 16.6.1.x	18.6.0
2024-03	RAN#107	R5-251437	3681	2	F	Update of TBD parameters RLM OOS in DRX and non-DRX mode for UE operating on a cell with less than 5MHz bandwidth test cases	18.6.0
2024-03	RAN#107	R5-251438	3682	2	F	Addition of RLM IS in DRX mode for UE operating on a cell with less than 5MHz bandwidth test case	18.6.0
2024-03	RAN#107	R5-251562	3768	1	F	Core Spec Alignment for Test Configuration ID for NR-NTN test cases	18.6.0
2024-03	RAN#107	R5-251563	3769	1	F	Addition of new Inter-frequency event triggered test cases for SAN	18.6.0
2024-03	RAN#107	R5-251564	3841	1	F	Addition of r18 NR-NTN RACH-based hard satellite switching test case 14.2.2.4	18.6.0
2024-03	RAN#107	R5-251565	3842	1	F	Addition of r18 NR-NTN RACH-less soft satellite switching test case 14.2.2.5	18.6.0
2024-03	RAN#107	R5-251582	3761	1	F	Update of minimum requirements for NES-based conditional handover	18.6.0
2024-03	RAN#107	R5-251583	3803	1	F	Correction of NR SA FR2 intra-frequency NES triggering conditional handover test case 7.3.3.3	18.6.0
2024-03	RAN#107	R5-251584	3804	1	F	Correction of NR SA FR2-FR1 inter-frequency NES triggering conditional handover test case 7.3.3.4	18.6.0
2024-03	RAN#107	R5-251585	3712	1	F	Addition of ATG RRM test case 19.6.1.1.1 - intra freq SS RSRP absolute accuracy	18.6.0
2024-03	RAN#107	R5-251586	3731	1	F	Correction to Annex E for ATG RRM test cases	18.6.0
2024-03	RAN#107	R5-251587	3745	1	F	Addition of Intra-frequency handover from FR1 to FR1 for ATG	18.6.0
2024-03	RAN#107	R5-251588	3746	1	F	Addition of Inter-frequency handover from FR1 to FR1 for ATG	18.6.0
2024-03	RAN#107	R5-251589	3747	1	F	Addition of Intra-frequency distance-based conditional handover from FR1 to FR1 for ATG	18.6.0
2024-03	RAN#107	R5-251590	3748	1	F	Addition of Inter-frequency distance-based conditional handover from FR1 to FR1 for ATG	18.6.0
2024-03	RAN#107	R5-251591	3797	1	F	Addition of Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode test case 19.4.1.1	18.6.0
2024-03	RAN#107	R5-251592	3798	1	F	Addition of Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode test case 19.4.1.2	18.6.0
2024-03	RAN#107	R5-251593	3799	1	F	Addition of Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode test case 19.4.1.3	18.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#107	R5-251594	3800	1	F	Addition of Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode test case 19.4.1.4	18.6.0
2024-03	RAN#107	R5-251595	3700	1	F	Addition of new test case 6.6.1.12 for intra-frequency event triggered reporting without gap with less than 5MHz bandwidth	18.6.0
2024-03	RAN#107	R5-251596	3692	1	F	Addition of SSB based L1-RSRP measurement for group-based beam reporting test case	18.6.0
2024-03	RAN#107	R5-251597	3693	1	F	Addition of CSI-RS based L1-RSRP measurement for group-based beam reporting test case	18.6.0
2024-03	RAN#107	R5-251598	3695	1	F	Addition of NR SA FR2 single DCI based active TCI state switch test case	18.6.0
2024-03	RAN#107	R5-251599	3843	1	F	Addition of FR2 multi-Rx RLM test case 5.5.1.11	18.6.0
2024-03	RAN#107	R5-251600	3844	1	F	Addition of FR2 multi-Rx RLM test case 7.5.1.10	18.6.0
2024-03	RAN#107	R5-251601	3763	1	F	Addition of MCE RRM test case 6.5.7D.4	18.6.0
2024-03	RAN#107	R5-251602	3765	1	F	Correction to MCE RRM test cases 6.5.7D.1, 6.5.7D.2 and 6.5.7D.3	18.6.0
2024-03	RAN#107	R5-251603	3674	1	F	Addition of new test case 6.6.24.4 for FR1 NR needforgap	18.6.0
2024-03	RAN#107	R5-251604	3790	1	F	Addition of NR SA FR2 event-triggered reporting with concurrent Type-2 measurement gap and NCSG test case 7.6.18.1	18.6.0
2024-03	RAN#107	R5-251605	3812	1	F	Update to NR-U FR1 IRAT test cases 12.1.1.1 and 12.2.1.1	18.6.0
2024-03	RAN#107	R5-251606	3813	1	F	Test Tolerance update in Annex F for NR-U cell reselection test cases 12.1.1.1 and 12.2.1.1	18.6.0
2024-03	RAN#107	R5-251611	3656	1	F	Addition of new test case 7.6.21.1 for FR2 LTM inter L1-RSRP measurement with gap	18.6.0
2024-03	RAN#107	R5-251612	3697	1	F	Addition of minimum requirements and new test case 7.3.4.1 for FR2 LTM PCell switch from FR2 to FR2	18.6.0
2024-03	RAN#107	R5-251613	3698	1	F	Addition of new test case 7.3.4.2 for FR2 LTM PCell switch from FR2 to FR2	18.6.0
2024-03	RAN#107	R5-251614	3699	1	F	Addition of new test case 7.3.4.3 for FR2 LTM PCell switch from FR2 to FR2	18.6.0
2024-03	RAN#107	R5-251615	3691	1	F	Addition of NR-DC SA FR2 conditional handover including target MCG and target SCG test case	18.6.0
2024-03	RAN#107	R5-251616	3668	1	F	Update of RRM TC titles for RedCap UE	18.6.0
2024-03	RAN#107	R5-251617	3733	1	F	Correction to EN-DC SS-RSRP measurement absolute accuracy test cases	18.6.0
2024-03	RAN#107	R5-251618	3779	1	F	Correction to q-OffsetCell in NR cell re-selection test cases for RedCap	18.6.0
2024-03	RAN#107	R5-251619	3781	1	F	Correction to titles of RedCap test cases	18.6.0
2024-03	RAN#107	R5-251620	3702	1	F	Update to RedCap SS-SINR and SS-RSRQ test cases	18.6.0
2024-03	RAN#107	R5-251621	3734	1	F	Correction to NR SA SS-RSRP measurement absolute accuracy test cases	18.6.0
2024-03	RAN#107	R5-251622	3738	1	F	Correction to RedCap SS-RSRP measurement absolute accuracy test cases	18.6.0
2024-03	RAN#107	R5-251644	3686	1	F	Correction and update to TRS and A-TRS based SSB-less SCell Activation test cases including TT	18.6.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2024-03	RAN#107	R5-251645	3687	1	F	Update to SA FR1 A-TRS based SSB-less SCell Activation test cases including TT	18.6.0
2024-03	RAN#107	R5-251646	3756	1	F	Addition of test case for NR UE Transmit Timing Test	18.6.0
2024-03	RAN#107	R5-251648	3703	1	F	Correction to TC4.5.3.4 with TT analysis	18.6.0
2024-03	RAN#107	R5-251649	3704	1	F	Correction to TC4.5.6.3.1 with TT analysis	18.6.0
2024-03	RAN#107	R5-251651	3827	1	F	Update to NR-NTN SSB-based RLM test cases 14.4.1.1, 14.4.1.2, 14.4.1.3 and 14.4.1.4 including TT	18.6.0
2024-03	RAN#107	R5-251652	3828	1	F	Update to NR-NTN CSI-RS-based RLM test cases 14.4.1.5, 14.4.1.6, 14.4.1.7 and 14.4.1.8 including TT	18.6.0
2024-03	RAN#107	R5-251653	3830	1	F	Addition of NR-NTN inter-frequency Handover test case 14.2.1.2	18.6.0
2024-03	RAN#107	R5-251654	3825	1	F	Update to NR-NTN inter-frequency test cases 14.5.2.x including TT	18.6.0
2024-03	RAN#107	R5-251655	3767	1	F	Correction of FR2 Rel-15 Random Access Test Cases Including TT for PC1	18.6.0
2024-03	RAN#107	R5-251657	3814	1	F	Update to NR-NTN cell reselection test cases 14.1.9 and 14.1.10 including TT	18.6.0
2024-03	RAN#107	R5-251658	3835	1	F	Update to Annex F for NR-NTN test cases	18.6.0
2024-03	RAN#107	R5-251691	3684	1	F	Completion of message contents in SA FR2 UE transmit timing test case	18.6.0
2024-03	RAN#107	R5-251741	3831	1	F	Update to NR-NTN intra-frequency time-based CHO test case 14.2.1.3 including TT	18.6.0
2024-03	RAN#107	R5-251742	3832	1	F	Update to NR-NTN inter-frequency time-based CHO test case 14.2.1.4 including TT	18.6.0
2024-03	RAN#107	R5-251744	3706	1	F	Correction to TC4.6.6.1 with TT analysis	18.6.0
2024-03	RAN#107	R5-251748	3737	1	F	Correction to Rel-17 UL Tx switching RRM test cases	18.6.0
2024-03	RAN#107	R5-251751	3685	1	F	Correction of clause number for the 3 AoA setup in TCI state switch test case	18.6.0
2024-03	RAN#107	R5-251752	3694	1	F	Addition of NR SA FR2 DCI based active TCI state switch with m-DCI test case	18.6.0
2025-03	RAN#107	-	-	-	-	accept ed revision marks in clause 1-4	18.6.1

History

Document history		
V18.2.1	June 2024	Publication
V18.3.0	August 2024	Publication
V18.4.0	November 2024	Publication
V18.5.0	February 2025	Publication
V18.6.1	May 2025	Publication